
Reviews & ratings data

Architecture overview. Readable node and connection sheets follow.

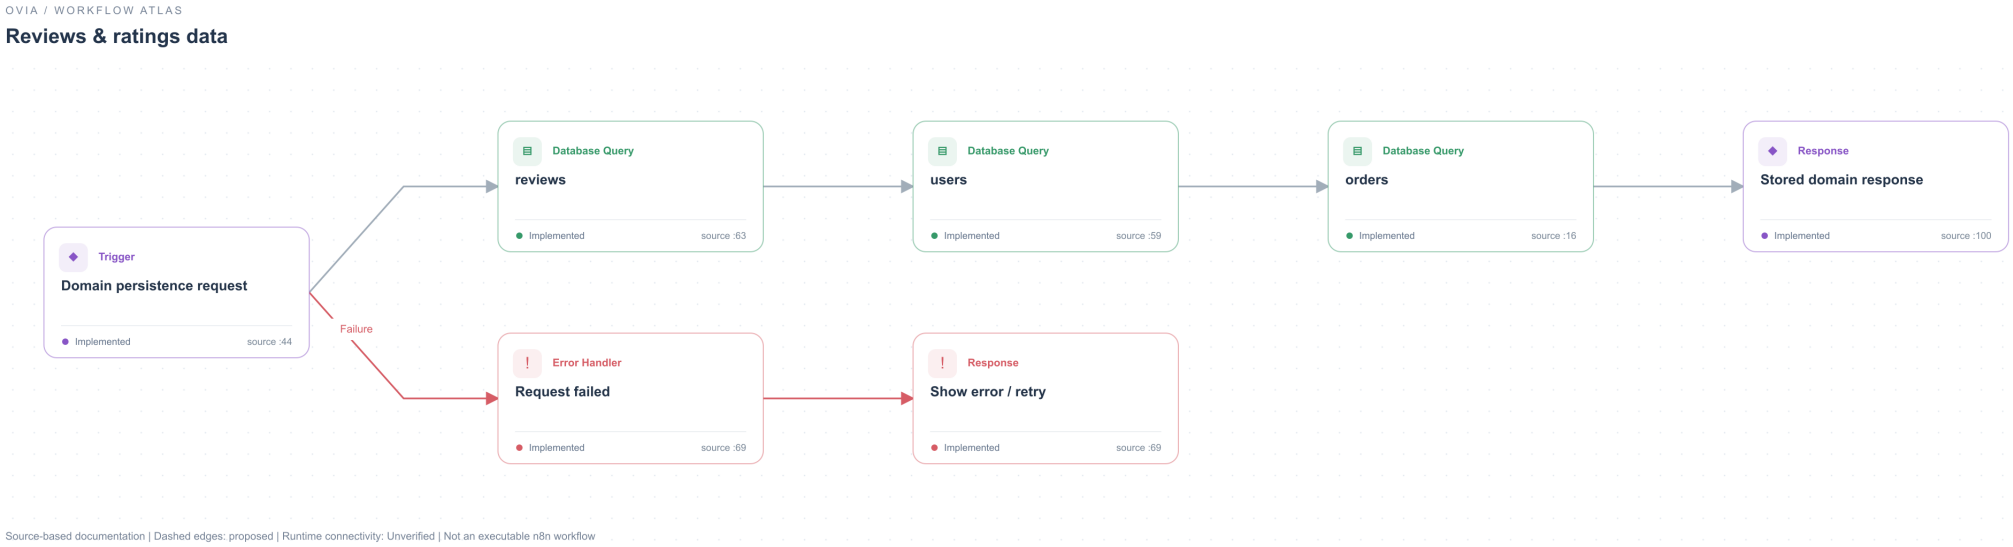

Reviews & ratings data

Readable detail sheet 1/2. Node numbers and page references preserve every directed connection.

#01 / Trigger / Implemented

Domain persistence request

Application services query the collections listed in this domain.

src/server/db.ts:44

Next -> #2 (p2); Failure -> #6 (p3)

#02 / Database Query / Implemented

reviews

Code-backed collection reviews; view reference fields in the model inventory.

src/app/api/v1/reviews/route.ts:63

Next -> #3 (p2)

#03 / Database Query / Implemented

users

Code-backed collection users; view reference fields in the model inventory.

src/app/api/admin/customers/route.ts:59

Next -> #4 (p2)

#04 / Database Query / Implemented

orders

Code-backed collection orders; view reference fields in the model inventory.

src/app/api/admin/orders/[id]/document/route.ts:16

Next -> #5 (p3)

Reviews & ratings data

Readable detail sheet 2/2. Node numbers and page references preserve every directed connection.

#05 / Response / Implemented

Stored domain response

Return persisted domain data to the service.

src/server/db.ts:100

END: no outgoing connection

#06 / Error Handler / Implemented

Request failed

Validation, access, conflict or service errors are returned to the caller. Status and error shape depend on the specific route.

src/server/http.ts:69

Next -> #7 (p3)

#07 / Response / Implemented

Show error / retry

Failure end state. Caller receives the actual error; a retry may be offered by the UI.

src/server/http.ts:69

END: no outgoing connection

Reviews & ratings data

Complete directed connection register / no omitted success, failure or proposed edges

#01 Domain persistence request -> #02 reviews | Next

#02 reviews -> #03 users | Next

#03 users -> #04 orders | Next

#04 orders -> #05 Stored domain response | Next

#01 Domain persistence request -> #06 Request failed | Failure | FAILURE

#06 Request failed -> #07 Show error / retry | Next | FAILURE

Note: Source implementation is documented; deployed configuration and provider connectivity are not verified.

Note: sessions.userId -> users.id (src/server/auth.ts:128)

Note: addresses.userId -> users.id (src/app/api/v1/account/addresses/[[...id]]/route.ts:8)

Note: orders.userId / owner -> user identity (src/server/commerce.ts:171)

Note: checkoutSessions.orderId -> orders.id (src/server/commerce.ts:191)

Note: reviews.userId -> users.id (src/app/api/v1/reviews/route.ts:63)

Note: reviews.optional orderId -> orders.id (src/lib/types.ts:187)

Note: tickets.orderId -> orders.id (src/server/care-order-requests.ts:73)

Note: returns.orderRawId -> orders.id (src/server/admin-service.ts:1407)

Note: orders.campaignId -> campaigns.id (src/server/commerce.ts:178)

Note: account_notifications.userId -> users.id (src/server/account-activity.ts:9)