
Wishlist & cart management

Architecture overview. Readable node and connection sheets follow.

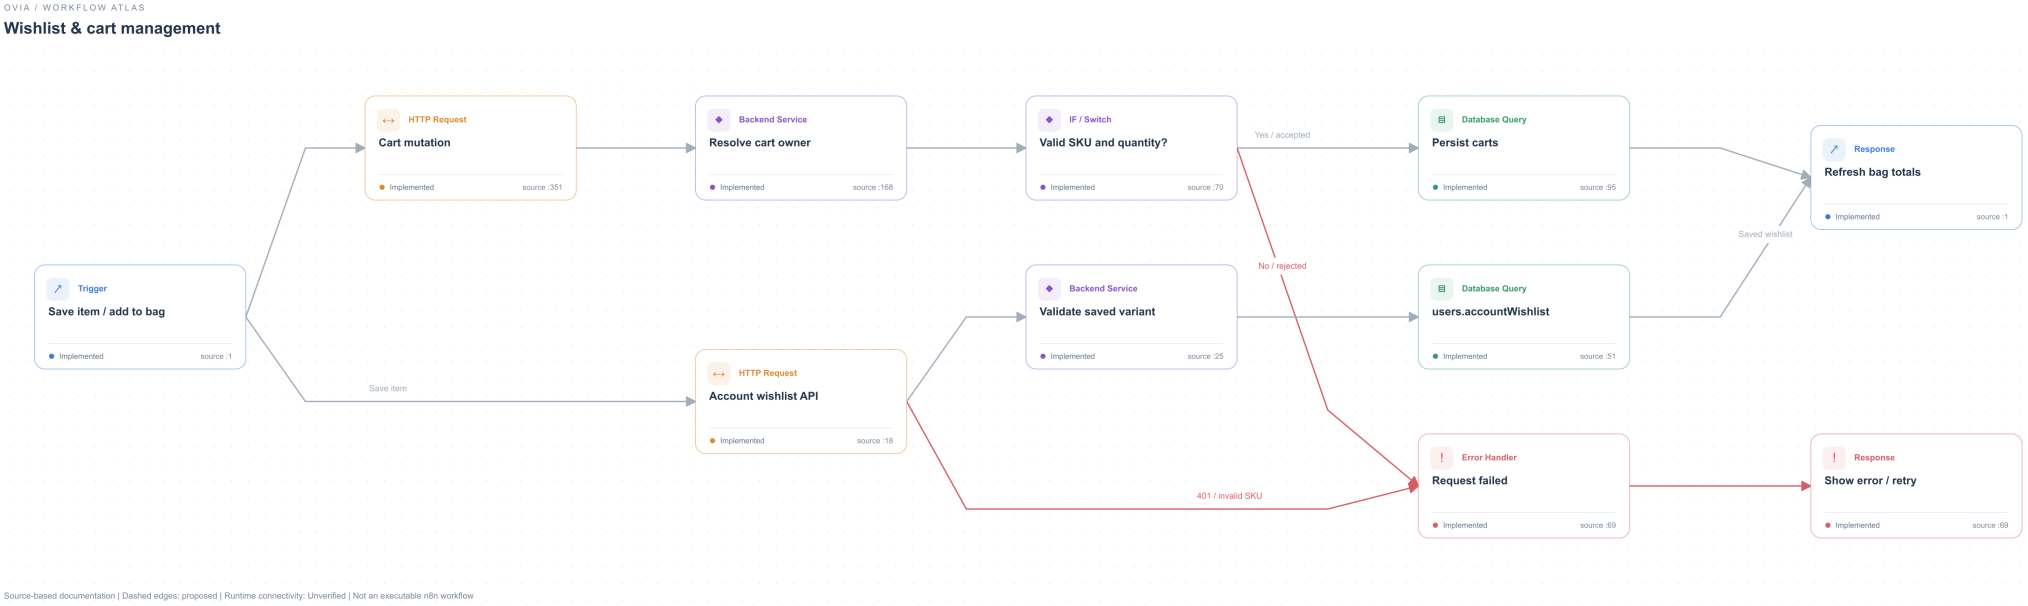

Wishlist & cart management

Readable detail sheet 1/3. Node numbers and page references preserve every directed connection.

#01 / Trigger / Implemented

Save item / add to bag

Store provider coordinates catalog, wishlist and cart interactions.

src/components/store-provider.tsx:1

Next -> #2 (p2); Save item -> #9 (p4)

#02 / HTTP Request / Implemented

Cart mutation

PATCH and DELETE /api/v1/cart/items/:sku are also implemented.

src/app/api/v1/[[...path]]/route.ts:351

Next -> #3 (p2)

#03 / Backend Service / Implemented

Resolve cart owner

Signed-in user ID or SHA256-hashed guest cookie identifies the cart.

src/server/auth.ts:168

Next -> #4 (p2)

#04 / IF / Switch / Implemented

Valid SKU and quantity?

Available variant, quantity 0-10 and optional cart version check; stale versions return 409.

src/server/commerce.ts:70

Yes / accepted -> #5 (p3); No / rejected -> #7 (p3)

Wishlist & cart management

Readable detail sheet 2/3. Node numbers and page references preserve every directed connection.

#05 / Database Query / Implemented

Persist carts

Cart contains id, lines[].sku, lines[].quantity and version.

src/server/commerce.ts:95

Next -> #6 (p3)

#06 / Response / Implemented

Refresh bag totals

Render server-confirmed line items and totals.

src/components/shopping-bag-drawer.tsx:1

END: no outgoing connection

#07 / Error Handler / Implemented

Request failed

Validation, access, conflict or service errors are returned to the caller. Status and error shape depend on the specific route.

src/server/http.ts:69

Next -> #8 (p3)

#08 / Response / Implemented

Show error / retry

Failure end state. Caller receives the actual error; a retry may be offered by the UI.

src/server/http.ts:69

END: no outgoing connection

Wishlist & cart management

Readable detail sheet 3/3. Node numbers and page references preserve every directed connection.

#09 / HTTP Request / Implemented

Account wishlist API

GET reads and DELETE removes saved items; authentication required.

src/app/api/v1/account/wishlist/route.ts:18

Next -> #10 (p4); 401 / invalid SKU -> #7 (p3)

#10 / Backend Service / Implemented

Validate saved variant

Validate input and catalog SKU.

src/server/account-wishlist.ts:25

Next -> #11 (p4)

#11 / Database Query / Implemented

users.accountWishlist

Wishlist is embedded on users; no standalone wishlist collection is invented.

src/server/account-wishlist.ts:51

Saved wishlist -> #6 (p3)

Wishlist & cart management

Complete directed connection register / no omitted success, failure or proposed edges

#01 Save item / add to bag -> #02 Cart mutation | Next

#02 Cart mutation -> #03 Resolve cart owner | Next

#03 Resolve cart owner -> #04 Valid SKU and quantity? | Next

#04 Valid SKU and quantity? -> #05 Persist carts | Yes / accepted

#05 Persist carts -> #06 Refresh bag totals | Next

#04 Valid SKU and quantity? -> #07 Request failed | No / rejected | FAILURE

#07 Request failed -> #08 Show error / retry | Next | FAILURE

#01 Save item / add to bag -> #09 Account wishlist API | Save item

#09 Account wishlist API -> #10 Validate saved variant | Next

#10 Validate saved variant -> #11 users.accountWishlist | Next

#11 users.accountWishlist -> #06 Refresh bag totals | Saved wishlist

#09 Account wishlist API -> #07 Request failed | 401 / invalid SKU | FAILURE

Note: Source implementation is documented; deployed configuration and provider connectivity are not verified.