
Shipping & delivery tracking

Architecture overview. Readable node and connection sheets follow.

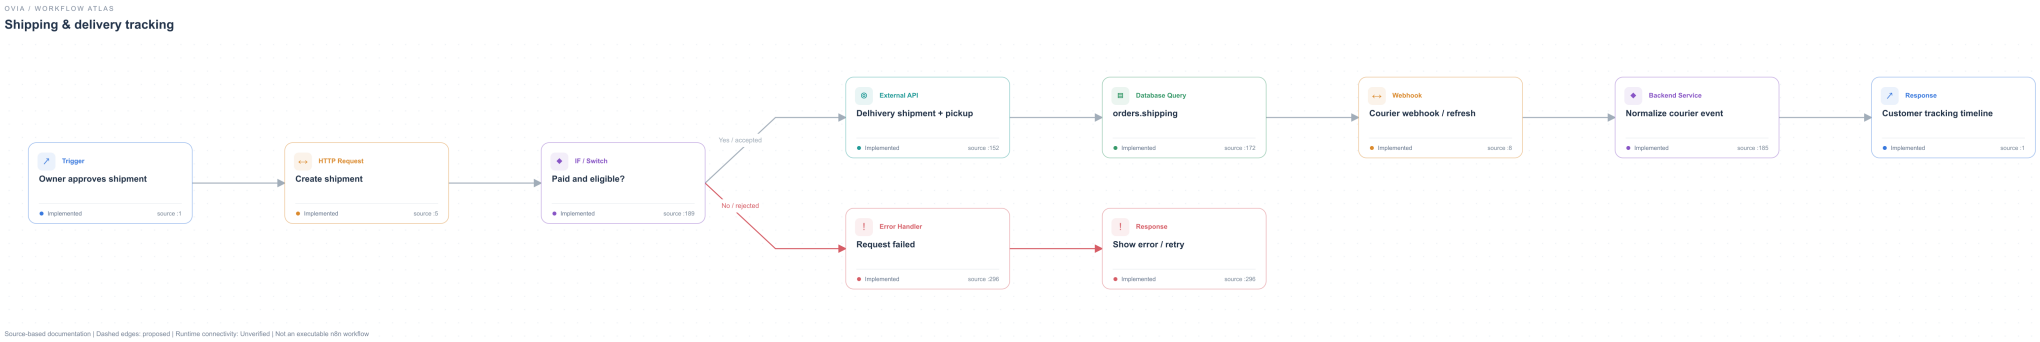

Shipping & delivery tracking

Readable detail sheet 1/3. Node numbers and page references preserve every directed connection.

#01 / Trigger / Implemented

Owner approves shipment

Owner reviews order and initiates shipment / pickup.

src/app/admin/(control-center)/orders/[id]/page.tsx:1

Next -> #2 (p2)

#02 / HTTP Request / Implemented

Create shipment

Authorized owner executes controlled logistics.

src/app/api/admin/orders/[id]/shipment/route.ts:5

Next -> #3 (p2)

#03 / IF / Switch / Implemented

Paid and eligible?

Payment capture, unrefunded state, package data and logistics lease checks prevent unsafe repeated actions.

src/server/logistics.ts:189

Yes / accepted -> #4 (p2); No / rejected -> #9 (p4)

#04 / External API / Implemented

Delhivery shipment + pickup

Courier API returns AWB and shipment metadata; pickup is requested through the shipping service. Runtime configuration and connectivity are Unverified.

src/lib/shipping/delhivery.ts:152

Next -> #5 (p3)

Shipping & delivery tracking

Readable detail sheet 2/3. Node numbers and page references preserve every directed connection.

#05 / Database Query / Implemented

orders.shipping

Shipping data and logistics operation progress are embedded on the order.

src/server/logistics.ts:172

Next -> #6 (p3)

#06 / Webhook / Implemented

Courier webhook / refresh

Courier events are authenticated; refresh route can also reconcile tracking.

src/app/api/webhooks/delhivery/route.ts:8

Next -> #7 (p3)

#07 / Backend Service / Implemented

Normalize courier event

Match AWB to stored order and map courier status into internal shipping status.

src/lib/shipping/service.ts:185

Next -> #8 (p3)

#08 / Response / Implemented

Customer tracking timeline

Only verified shipment information is shown to customers.

src/components/order-tracking.tsx:1

END: no outgoing connection

Shipping & delivery tracking

Readable detail sheet 3/3. Node numbers and page references preserve every directed connection.

#09 / Error Handler / Implemented

Request failed

Ambiguous courier writes are tracked for review instead of falsely declaring shipment success.

src/server/logistics.ts:296

Next -> #10 (p4)

#10 / Response / Implemented

Show error / retry

Failure end state. Caller receives the actual error; a retry may be offered by the UI.

src/server/logistics.ts:296

END: no outgoing connection

Shipping & delivery tracking

Complete directed connection register / no omitted success, failure or proposed edges

#01 Owner approves shipment -> #02 Create shipment | Next

#02 Create shipment -> #03 Paid and eligible? | Next

#03 Paid and eligible? -> #04 Delhivery shipment + pickup | Yes / accepted

#04 Delhivery shipment + pickup -> #05 orders.shipping | Next

#05 orders.shipping -> #06 Courier webhook / refresh | Next

#06 Courier webhook / refresh -> #07 Normalize courier event | Next

#07 Normalize courier event -> #08 Customer tracking timeline | Next

#03 Paid and eligible? -> #09 Request failed | No / rejected | FAILURE

#09 Request failed -> #10 Show error / retry | Next | FAILURE

Note: Source implementation is documented; deployed configuration and provider connectivity are not verified.