
Notifications & email automation

Architecture overview. Readable node and connection sheets follow.

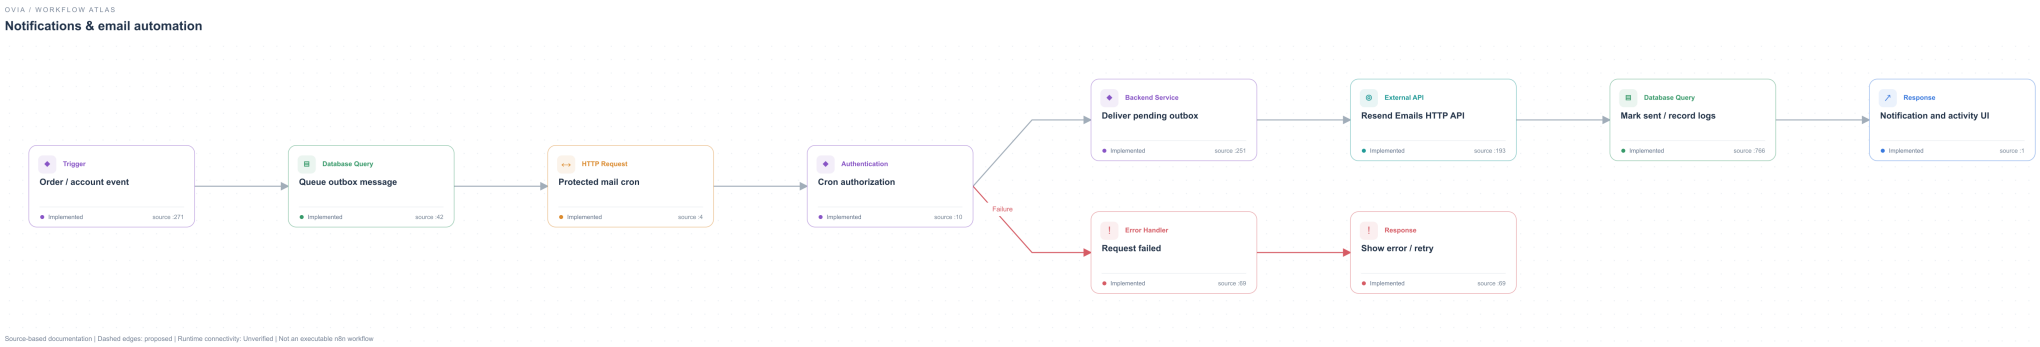

Notifications & email automation

Readable detail sheet 1/3. Node numbers and page references preserve every directed connection.

#01 / Trigger / Implemented

Order / account event

Account verification, recovery, confirmed orders and shipping events trigger relevant mail routines.

src/server/mail.ts:271

Next -> #2 (p2)

#02 / Database Query / Implemented

Queue outbox message

Outbox IDs and existing-record checks prevent duplicate messages.

src/server/mail.ts:42

Next -> #3 (p2)

#03 / HTTP Request / Implemented

Protected mail cron

Bearer CRON_SECRET is required; no secret value is exported.

src/app/api/cron/mail/route.ts:4

Next -> #4 (p2)

#04 / Authentication / Implemented

Cron authorization

Missing or incorrect bearer token is rejected.

src/app/api/cron/mail/route.ts:10

Next -> #5 (p3); Failure -> #9 (p4)

Notifications & email automation

Readable detail sheet 2/3. Node numbers and page references preserve every directed connection.

#05 / Backend Service / Implemented

Deliver pending outbox

Read pending messages, send and mark sent only after successful delivery.

src/server/mail.ts:251

Next -> #6 (p3)

#06 / External API / Implemented

Resend Emails HTTP API

Account and order mail HTTP integration; retries and failure status remain explicit. Runtime configuration and connectivity are Unverified.

src/server/mail.ts:193

Next -> #7 (p3)

#07 / Database Query / Implemented

Mark sent / record logs

Notification studio has notification_logs and deduplication; account events write account_notifications.

src/server/notification-service.ts:766

Next -> #8 (p3)

#08 / Response / Implemented

Notification and activity UI

Account activity reads notifications; admin notification studio reads delivery logs.

src/components/account-activity-feed.tsx:1

END: no outgoing connection

Notifications & email automation

Readable detail sheet 3/3. Node numbers and page references preserve every directed connection.

#09 / Error Handler / Implemented

Request failed

Validation, access, conflict or service errors are returned to the caller. Status and error shape depend on the specific route.

src/server/http.ts:69

Next -> #10 (p4)

#10 / Response / Implemented

Show error / retry

Failure end state. Caller receives the actual error; a retry may be offered by the UI.

src/server/http.ts:69

END: no outgoing connection

Notifications & email automation

Complete directed connection register / no omitted success, failure or proposed edges

#01 Order / account event -> #02 Queue outbox message | Next

#02 Queue outbox message -> #03 Protected mail cron | Next

#03 Protected mail cron -> #04 Cron authorization | Next

#04 Cron authorization -> #05 Deliver pending outbox | Next

#05 Deliver pending outbox -> #06 Resend Emails HTTP API | Next

#06 Resend Emails HTTP API -> #07 Mark sent / record logs | Next

#07 Mark sent / record logs -> #08 Notification and activity UI | Next

#04 Cron authorization -> #09 Request failed | Failure | FAILURE

#09 Request failed -> #10 Show error / retry | Next | FAILURE

Note: Source implementation is documented; deployed configuration and provider connectivity are not verified.

Note: Outbox delivery and notification studio dispatch are related but separate service paths; not every outbox send creates a notification_logs entry.