
Reports & analytics

Architecture overview. Readable node and connection sheets follow.

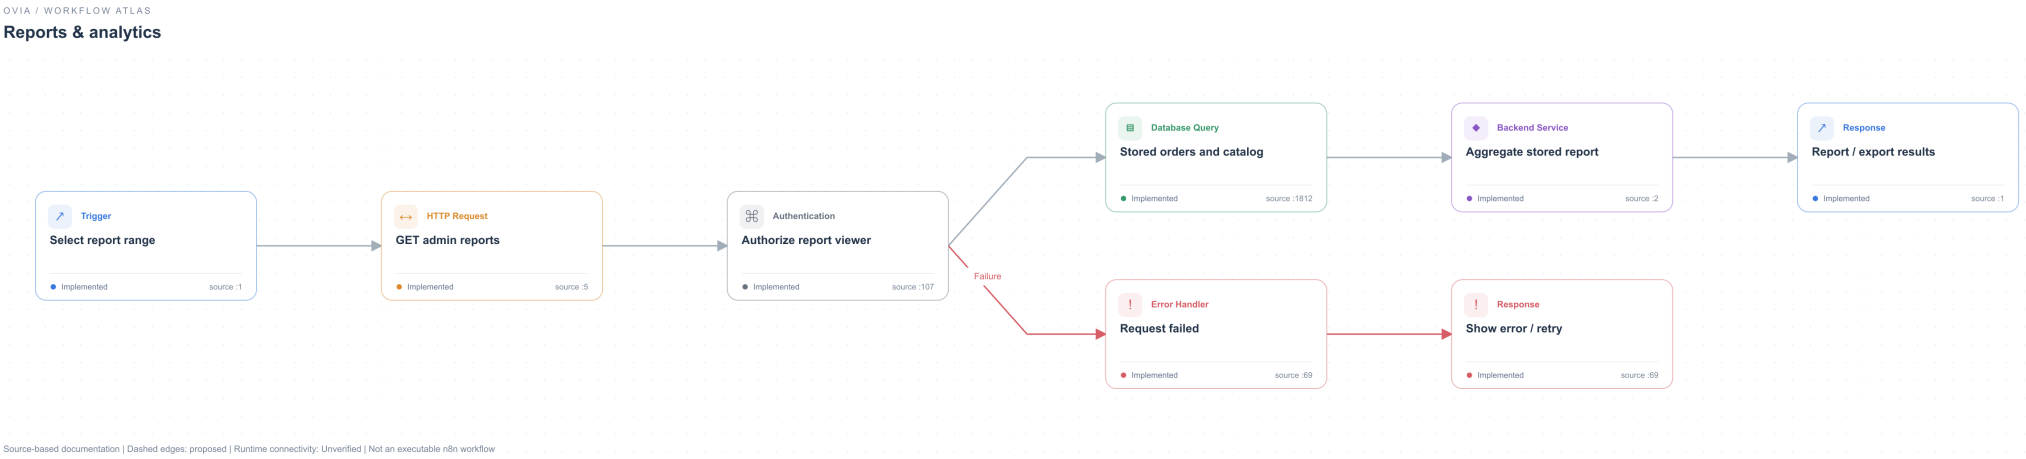

Reports & analytics

Readable detail sheet 1/2. Node numbers and page references preserve every directed connection.

#01 / Trigger / Implemented

Select report range

Owner reports page selects report type and range.

src/app/admin/(control-center)/reports/page.tsx:1

Next -> #2 (p2)

#02 / HTTP Request / Implemented

GET admin reports

authorizeAdminApi precedes getAdminReports.

src/app/api/admin/reports/route.ts:5

Next -> #3 (p2)

#03 / Authentication / Implemented

Authorize report viewer

Only authorized owner sessions can read admin reports.

src/server/admin-auth.ts:107

Next -> #4 (p2); Failure -> #7 (p3)

#04 / Database Query / Implemented

Stored orders and catalog

Orders plus full catalog feed buildStoredSalesReport; no synthetic revenue is claimed.

src/server/admin-service.ts:1812

Next -> #5 (p3)

Reports & analytics

Readable detail sheet 2/2. Node numbers and page references preserve every directed connection.

#05 / Backend Service / Implemented

Aggregate stored report

Report calculations are imported from admin date-range helpers.

src/server/admin-service.ts:2

Next -> #6 (p3)

#06 / Response / Implemented

Report / export results

Reports UI presents calculated data; admin dashboard and campaign analytics are separate routes.

src/app/admin/(control-center)/reports/page.tsx:1

END: no outgoing connection

#07 / Error Handler / Implemented

Request failed

Validation, access, conflict or service errors are returned to the caller. Status and error shape depend on the specific route.

src/server/http.ts:69

Next -> #8 (p3)

#08 / Response / Implemented

Show error / retry

Failure end state. Caller receives the actual error; a retry may be offered by the UI.

src/server/http.ts:69

END: no outgoing connection

Reports & analytics

Complete directed connection register / no omitted success, failure or proposed edges

#01 Select report range -> #02 GET admin reports | Next

#02 GET admin reports -> #03 Authorize report viewer | Next

#03 Authorize report viewer -> #04 Stored orders and catalog | Next

#04 Stored orders and catalog -> #05 Aggregate stored report | Next

#05 Aggregate stored report -> #06 Report / export results | Next

#03 Authorize report viewer -> #07 Request failed | Failure | FAILURE

#07 Request failed -> #08 Show error / retry | Next | FAILURE

Note: Source implementation is documented; deployed configuration and provider connectivity are not verified.

Note: AI copilot is an implemented optional DeepSeek request path. Model quality and production connectivity are Unverified; it does not replace stored sales calculations.