
Backend request lifecycle

Architecture overview. Readable node and connection sheets follow.

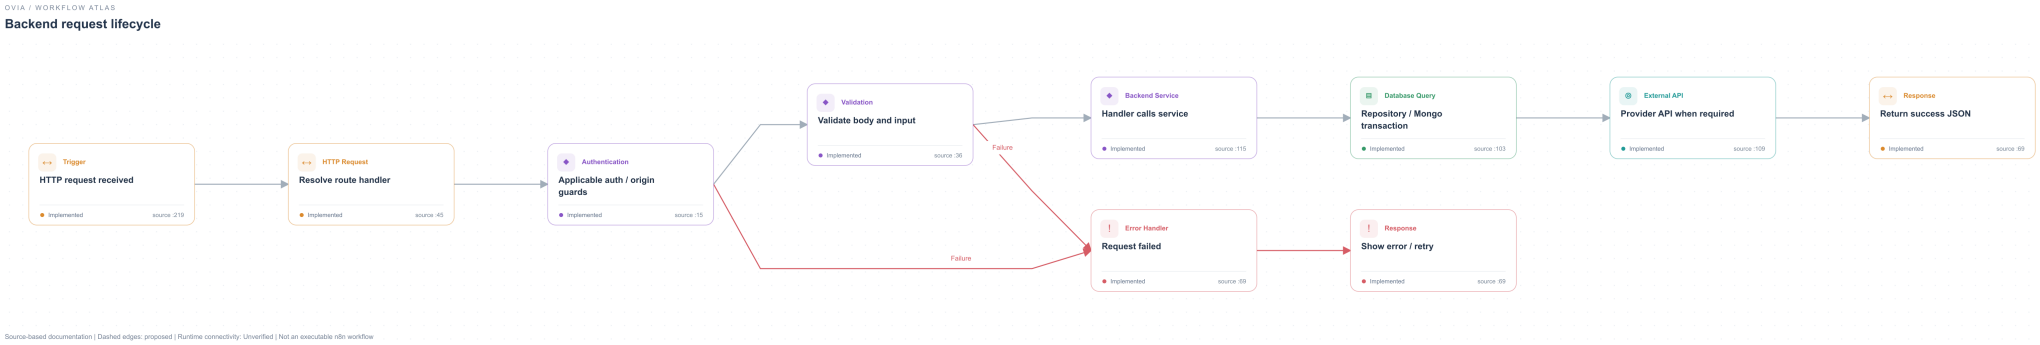

Backend request lifecycle

Readable detail sheet 1/3. Node numbers and page references preserve every directed connection.

#01 / Trigger / Implemented

HTTP request received

Next.js route receives request and promised path params.

src/app/api/v1/[[...path]]/route.ts:219

Next -> #2 (p2)

#02 / HTTP Request / Implemented

Resolve route handler

App Router file routes plus explicit catchall dispatch.

src/app/api/v1/[[...path]]/route.ts:45

Next -> #3 (p2)

#03 / Authentication / Implemented

Applicable auth / origin guards

Each handler decides which helpers apply; this is a representative guarded mutation lifecycle.

src/server/http.ts:15

Next -> #4 (p2); Failure -> #9 (p4)

#04 / Validation / Implemented

Validate body and input

Streaming body cap and Zod validation where explicitly called.

src/server/http.ts:36

Next -> #5 (p3); Failure -> #9 (p4)

Backend request lifecycle

Readable detail sheet 2/3. Node numbers and page references preserve every directed connection.

#05 / Backend Service / Implemented

Handler calls service

Actual business rules and idempotency are in server modules.

src/server/commerce.ts:115

Next -> #6 (p3)

#06 / Database Query / Implemented

Repository / Mongo transaction

Native database operations share a session when required.

src/server/db.ts:103

Next -> #7 (p3)

#07 / External API / Implemented

Provider API when required

External writes are reconciled with durable local state; not all requests call a provider. Runtime configuration and connectivity are Unverified.

src/server/razorpay-checkout.ts:109

Next -> #8 (p3)

#08 / Response / Implemented

Return success JSON

Common wrapper returns {data}; other routes use documented custom response shapes.

src/server/http.ts:69

END: no outgoing connection

Backend request lifecycle

Readable detail sheet 3/3. Node numbers and page references preserve every directed connection.

#09 / Error Handler / Implemented

Request failed

Validation, access, conflict or service errors are returned to the caller. Status and error shape depend on the specific route.

src/server/http.ts:69

Next -> #10 (p4)

#10 / Response / Implemented

Show error / retry

Failure end state. Caller receives the actual error; a retry may be offered by the UI.

src/server/http.ts:69

END: no outgoing connection

Backend request lifecycle

Complete directed connection register / no omitted success, failure or proposed edges

#01 HTTP request received -> #02 Resolve route handler | Next

#02 Resolve route handler -> #03 Applicable auth / origin guards | Next

#03 Applicable auth / origin guards -> #04 Validate body and input | Next

#04 Validate body and input -> #05 Handler calls service | Next

#05 Handler calls service -> #06 Repository / Mongo transaction | Next

#06 Repository / Mongo transaction -> #07 Provider API when required | Next

#07 Provider API when required -> #08 Return success JSON | Next

#03 Applicable auth / origin guards -> #09 Request failed | Failure | FAILURE

#04 Validate body and input -> #09 Request failed | Failure | FAILURE

#09 Request failed -> #10 Show error / retry | Next | FAILURE

Note: Source implementation is documented; deployed configuration and provider connectivity are not verified.

Note: Source contains no central src/middleware.ts or src/proxy.ts. Guards are route-local and server-component-local. Logging is selective, not a universal centralized logging pipeline.