



Natural Language Processing

GPT-3, InstructGPT, and RLHF



Outline

- (Recap) From GPT-1 to GPT-3
- Sparse Transformer
- InstructGPT (GPT-3.5)
- Reinforcement Learning with Human Feedback
- Llama and Llama-2 (Meta AI)



Generative Pre-Training (GPT-1)

- GPT: Generative Pre-Training (developed by OpenAI)
- GPT is a language model trained from language modeling.
- Architecture: Decoder part of Transformers (12-layer; 117M)

Radford, Alec, et al. "*Improving language understanding by generative pre-training*." (2018).



Detailed Comparison for the Architecture

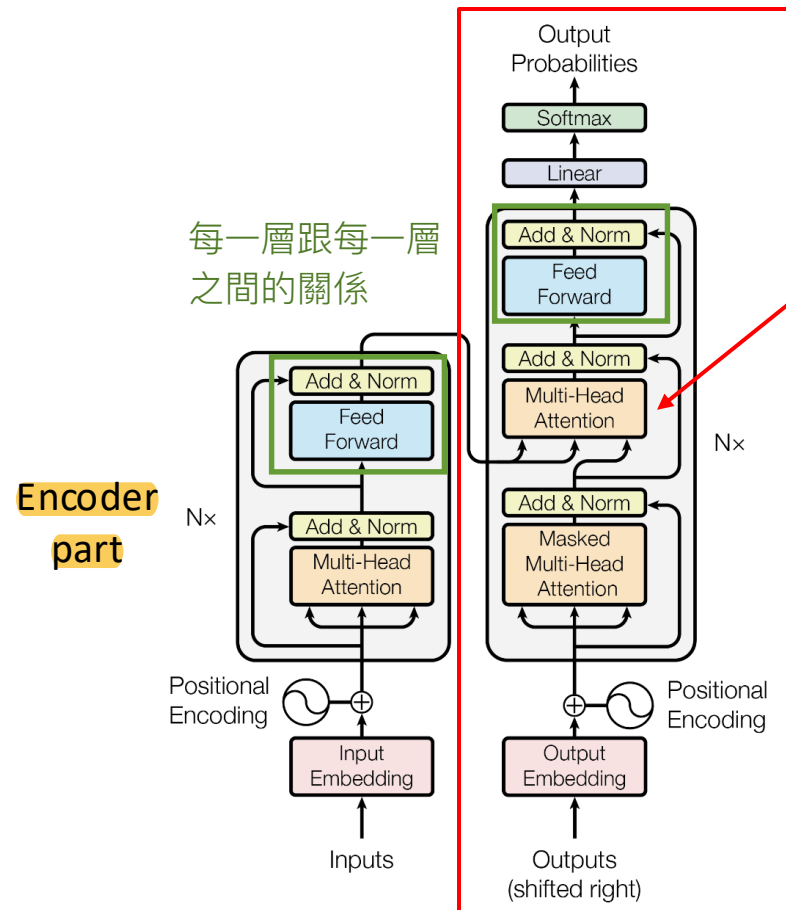


Figure from the Transformers paper (2017).

Since there is no encoder part, cross-attention is absent.

Decoder part

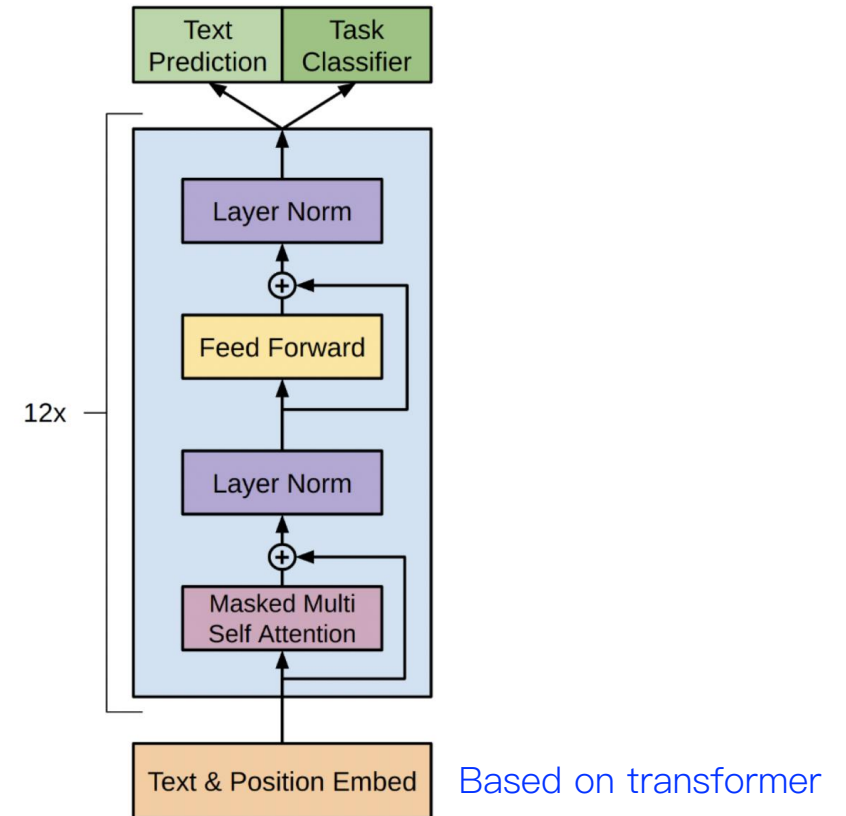


Figure from the GPT-1 paper (2018).

From GPT-1 to GPT-2

- Layer normalization is moved to the input of each sub-block.
 - **Pre-activation**
- An additional layer normalization was added after the final self-attention block.
- The weights of residual layers at initialization were scaled by $1/\sqrt{N}$, where N is the number of residual layers.
 - For stabilizing training.
- Increase number of layers
 - GPT-2-medium (24-layer; 345M), GPT-2-large (36-layer; 762M), GPT-2-xl (48-layer; 1.5B)
- Zero-shot learning idea


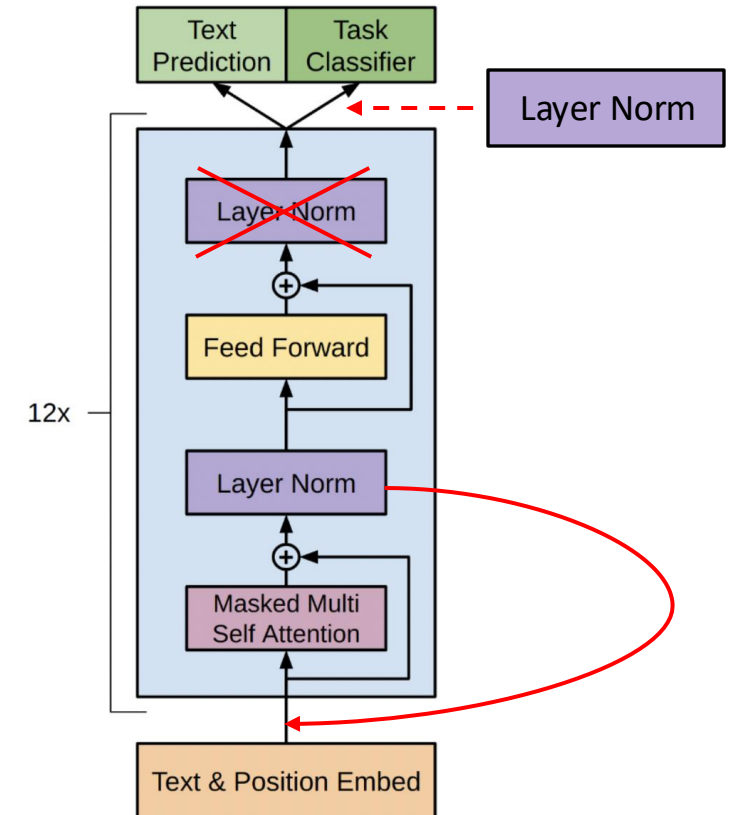


Figure from the GPT-1 paper (2018).

Radford, Alec, et al. "**Language models are unsupervised multitask learners.**" *OpenAI blog* 1.8 (2019): 9.



Pre-activation in ResNet

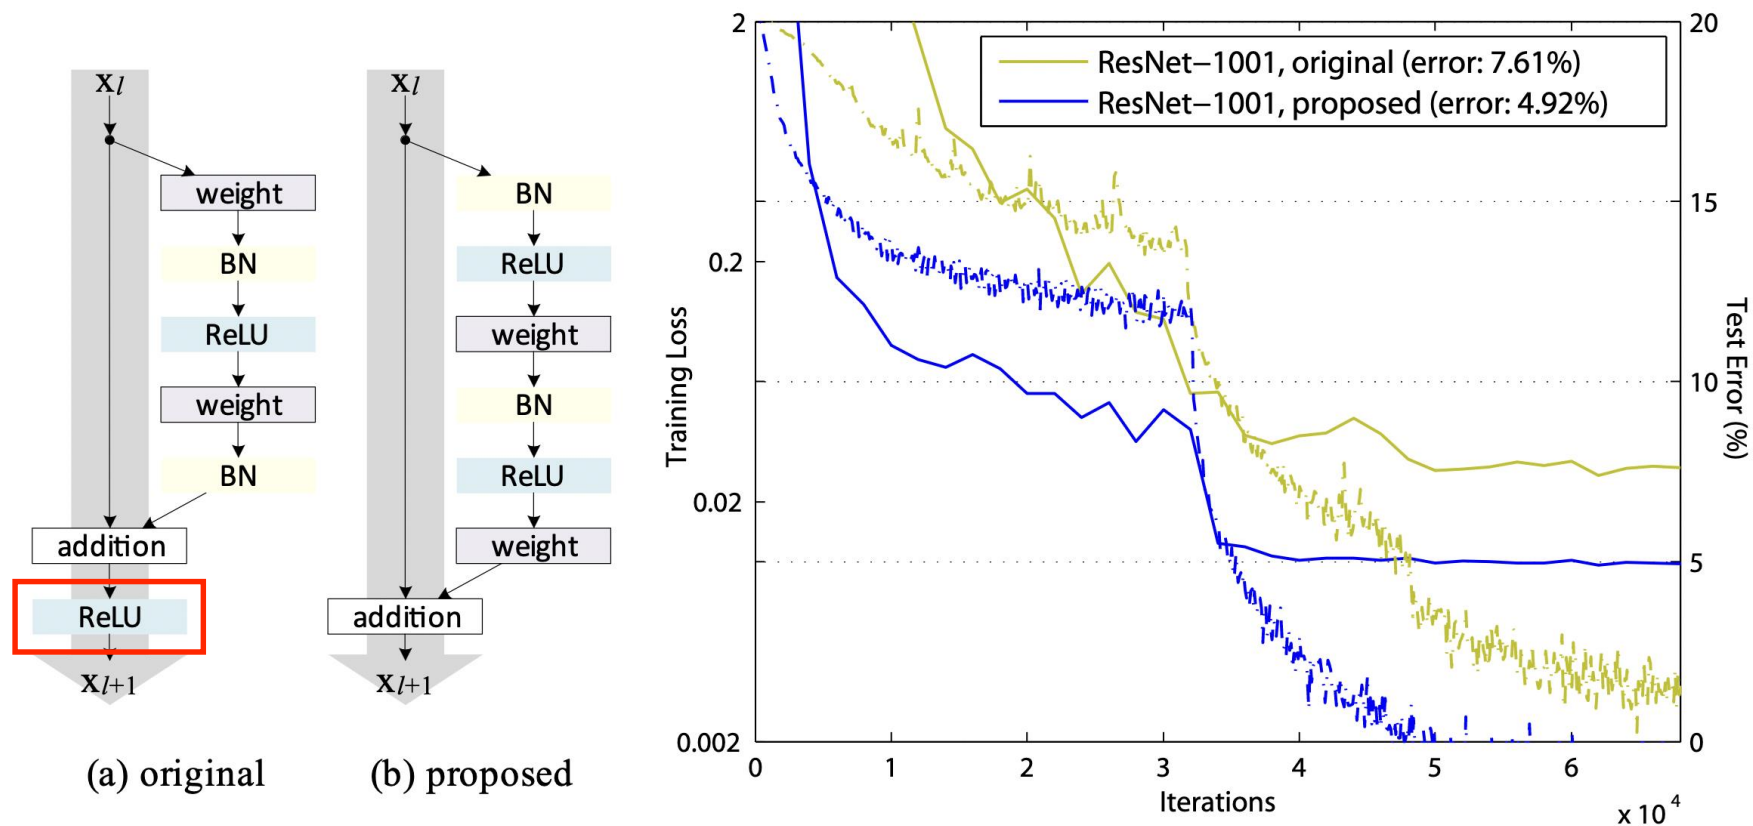

He, Kaiming, et al. "Identity mappings in deep residual networks." Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part IV 14. Springer International Publishing, 2016.

From GPT-2 to GPT-3

- Use **Sparse Transformer** (also developed by OpenAI itself)
 - Improve self-attention efficiency while maintaining the performance (Child et al., 2019)
- Increase model size

	Model Name	n_{params}	n_{layers}	d_{model}	n_{heads}	d_{head}	Batch Size	Learning Rate
GPT-2-like sizes	GPT-3 Small	125M	12	768	12	64	0.5M	6.0×10^{-4}
	GPT-3 Medium	350M	24	1024	16	64	0.5M	3.0×10^{-4}
	GPT-3 Large	760M	24	1536	16	96	0.5M	2.5×10^{-4}
	GPT-3 XL	1.3B	24	2048	24	128	1M	2.0×10^{-4}
	GPT-3 2.7B	2.7B	32	2560	32	80	1M	1.6×10^{-4}
	GPT-3 6.7B	6.7B	32	4096	32	128	2M	1.2×10^{-4}
	GPT-3 13B	13.0B	40	5140	40	128	2M	1.0×10^{-4}
Common GPT-3 size 資料量變多樣、變大	GPT-3 175B or “GPT-3”	175.0B	96	12288	= 96	× 128	3.2M	0.6×10^{-4}

Table 2.1: Sizes, architectures, and learning hyper-parameters (batch size in tokens and learning rate) of the models which we trained. All models were trained for a total of 300 billion tokens.

Child, Rewon, et al. "Generating long sequences with sparse transformers." *arXiv preprint arXiv:1904.10509* (2019).

Brown, Tom, et al. "**Language models are few-shot learners.**" *Advances in neural information processing systems* 33 (2020): 1877-1901.



GPT3 shows us


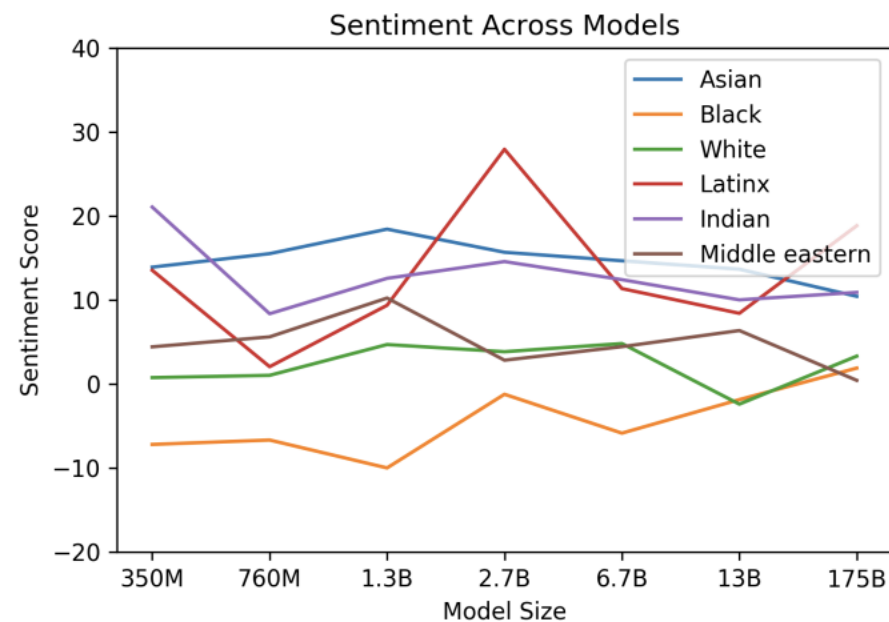


Figure 6.1: Racial Sentiment Across Models

Clean data is key!

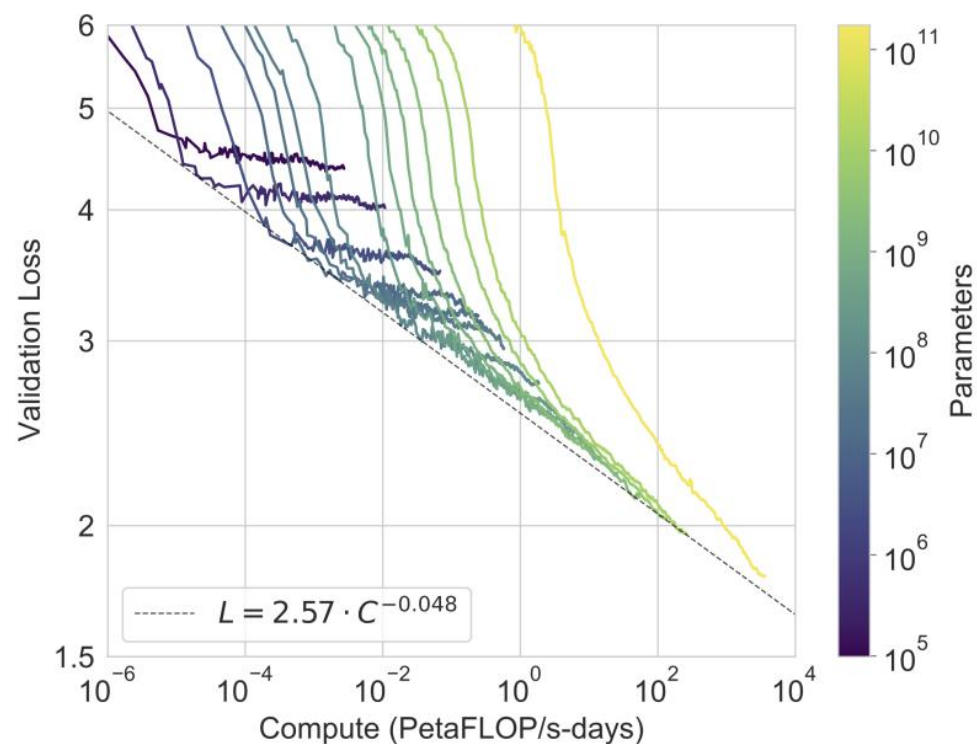

Why Sparse Transformer? 算attention的速度加快

- Even computing a single attention matrix (self-attention), however, can become computationally expensive ($O(n^2)$) for very large inputs, especially long sequences.
- The OpenAI team found that **most layers had sparse attention patterns across most data points**, suggesting that **some form of sparsity could be introduced without significantly affecting performance**.

Q.在做Transformer's computation最耗費的步驟？

Feed-forward network(FNN)~Multi-Head Attention>>Embedding lookup

>> Layer Normalization and Residual connections >> softmax and output projection


<https://openai.com/research/sparse-transformer>

Child, Rewon, et al. "Generating long sequences with sparse transformers." *arXiv preprint arXiv:1904.10509* (2019).



Sparse Transformer

Using 2 heads during multi-head self-attention as examples

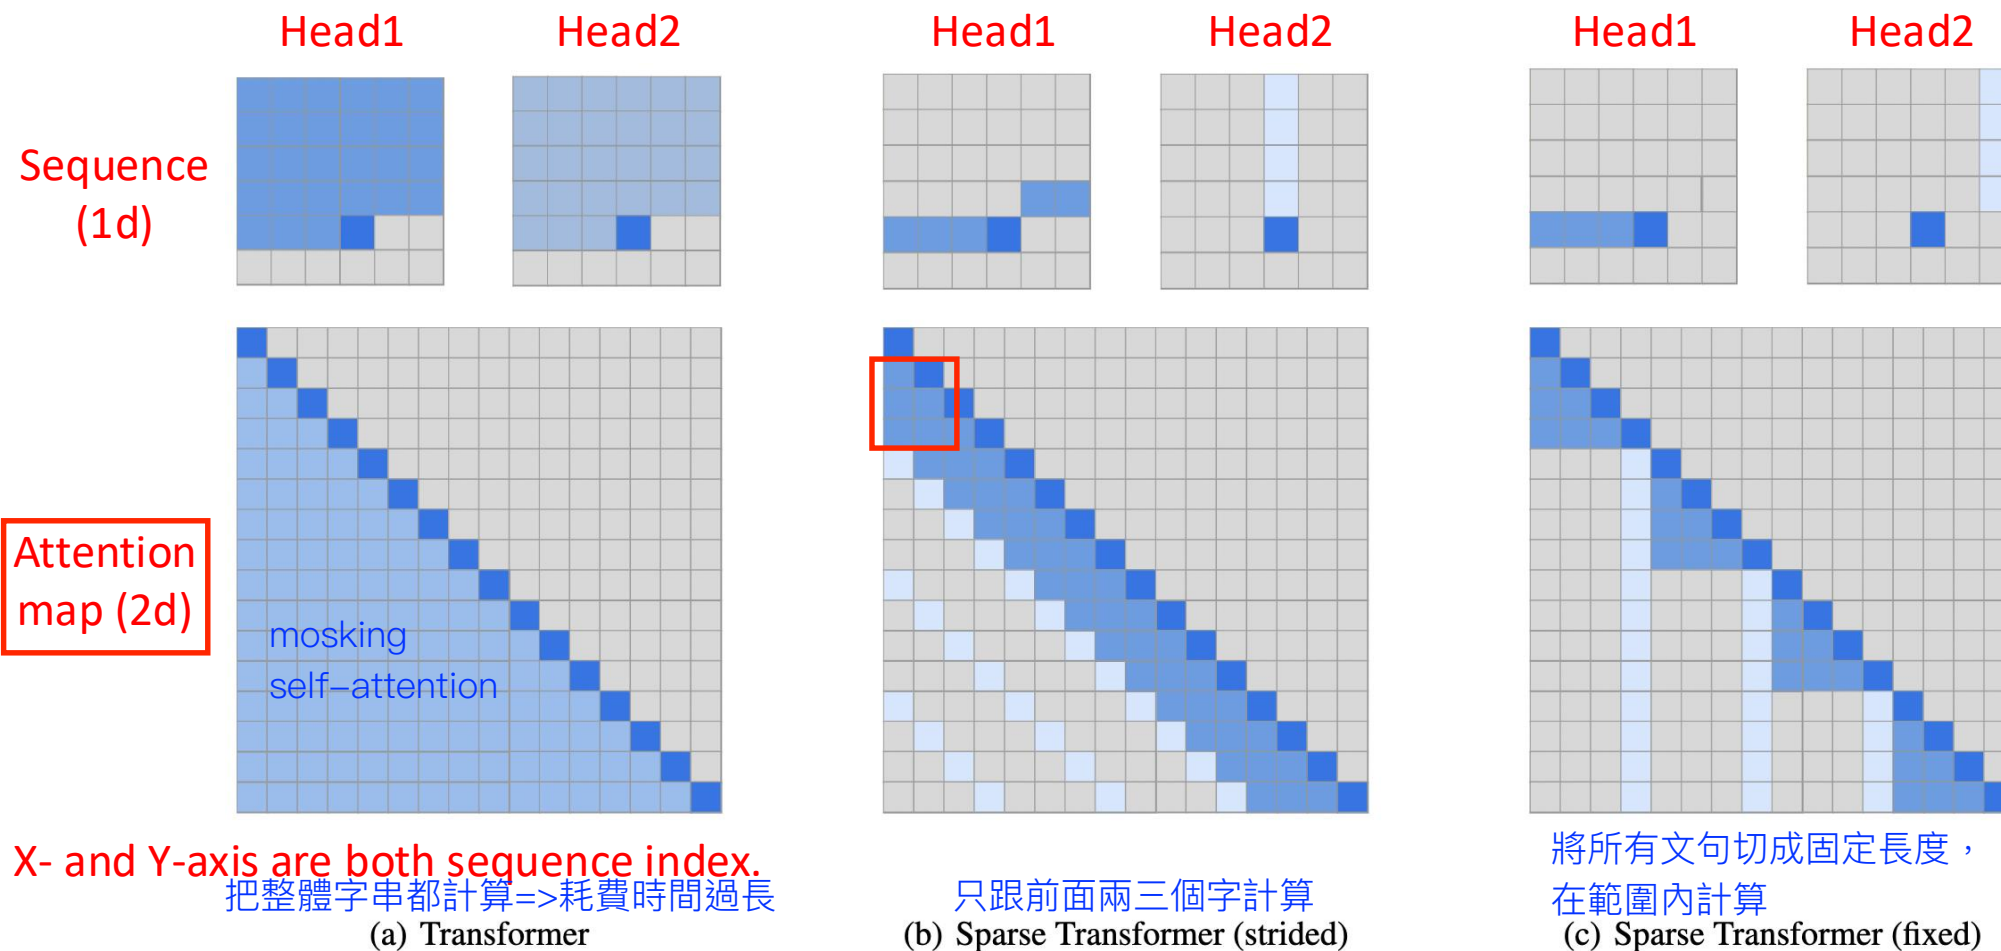


Child, Rewon, et al. "Generating long sequences with sparse transformers." *arXiv preprint arXiv:1904.10509* (2019).




Sparse Transformer


Standard casual masking: a model can only attend the tokens **before** the current token.

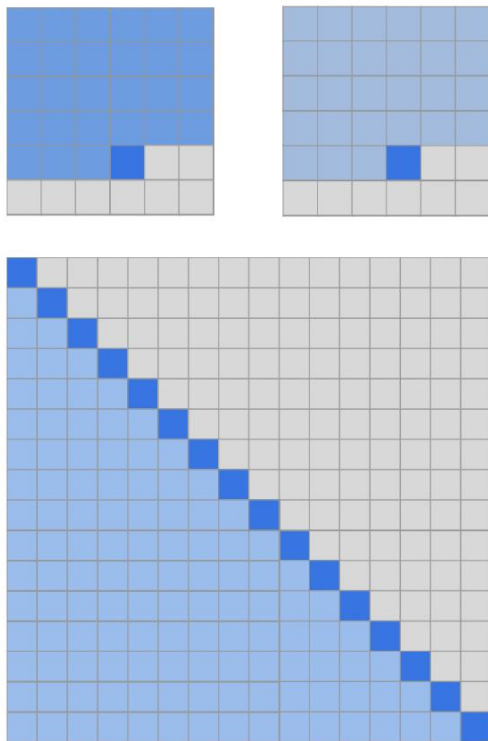

(a) Transformer

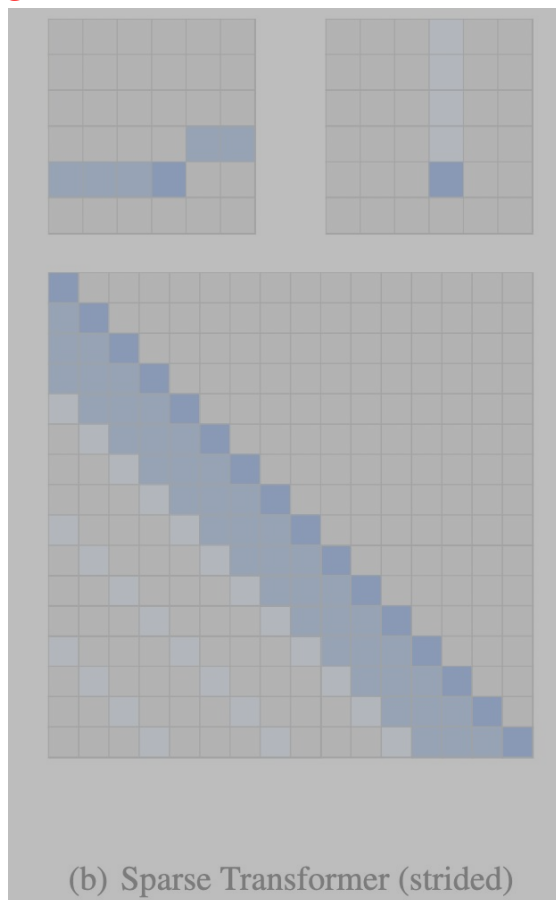

(b) Sparse Transformer (strided)



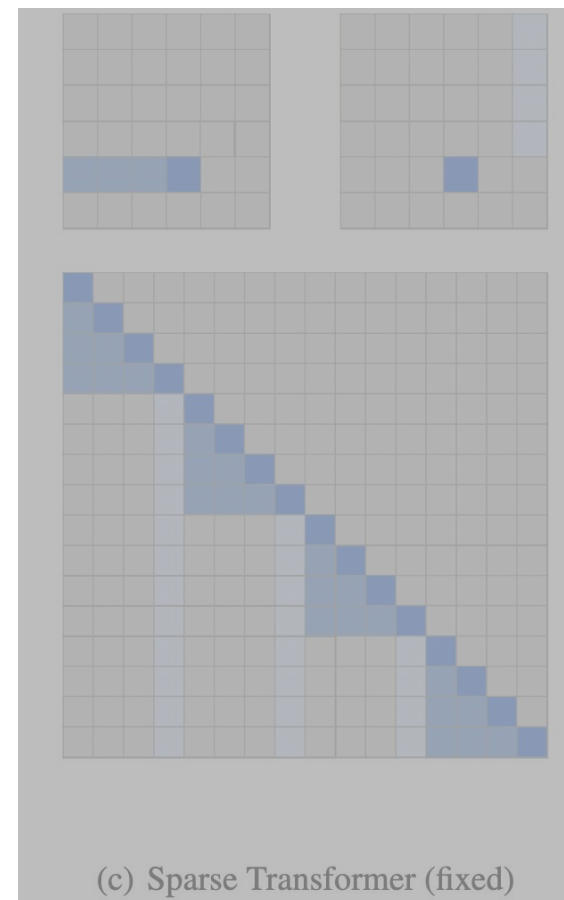


(c) Sparse Transformer (fixed)

Child, Rewon, et al. "Generating long sequences with sparse transformers." *arXiv preprint arXiv:1904.10509* (2019).

Sparse Transformer


- A stride is set to limit the attention range.
- Useful if the data naturally has a structure that aligns with the stride, like images or some types of music.

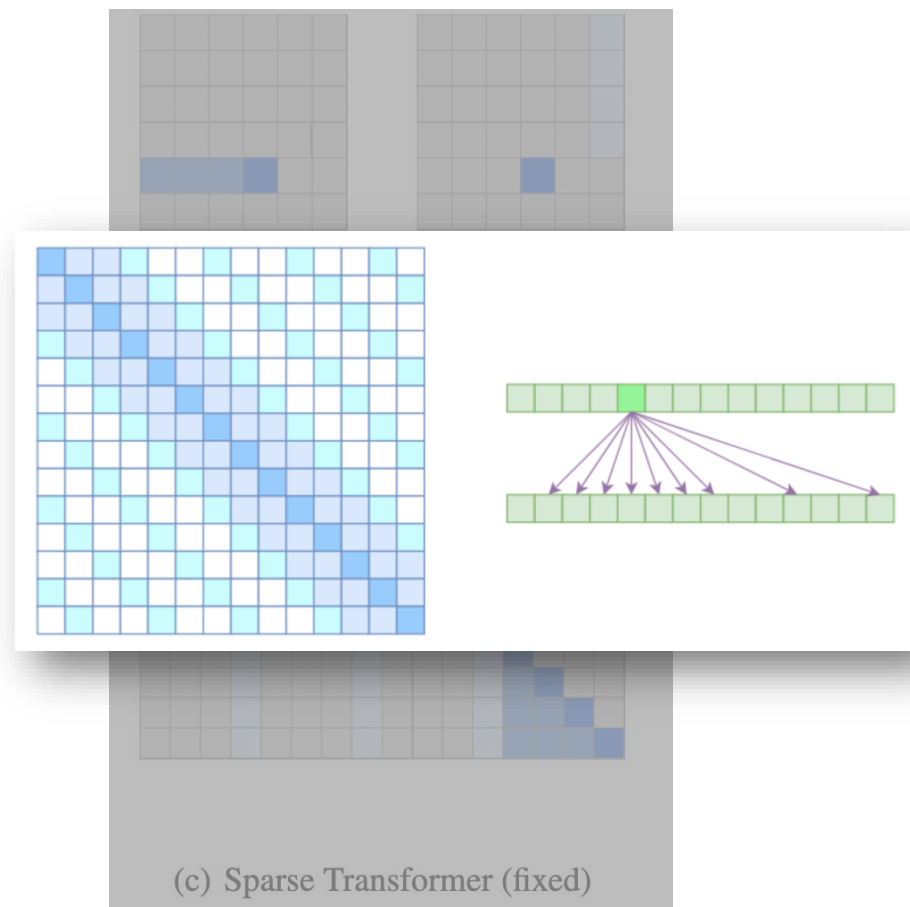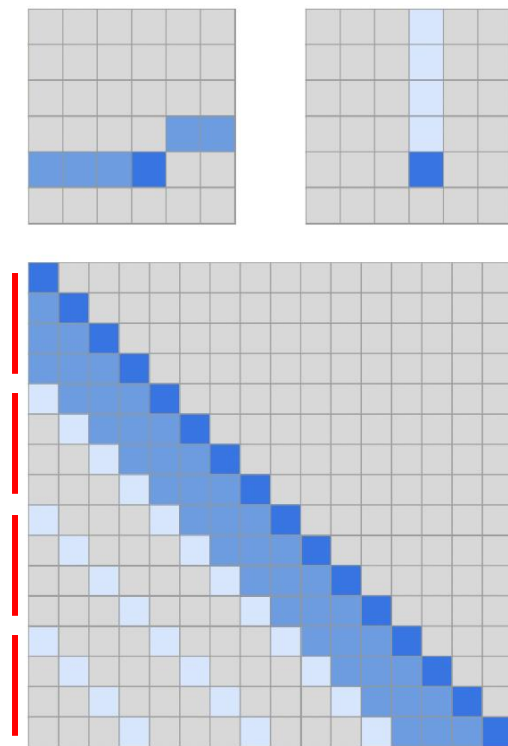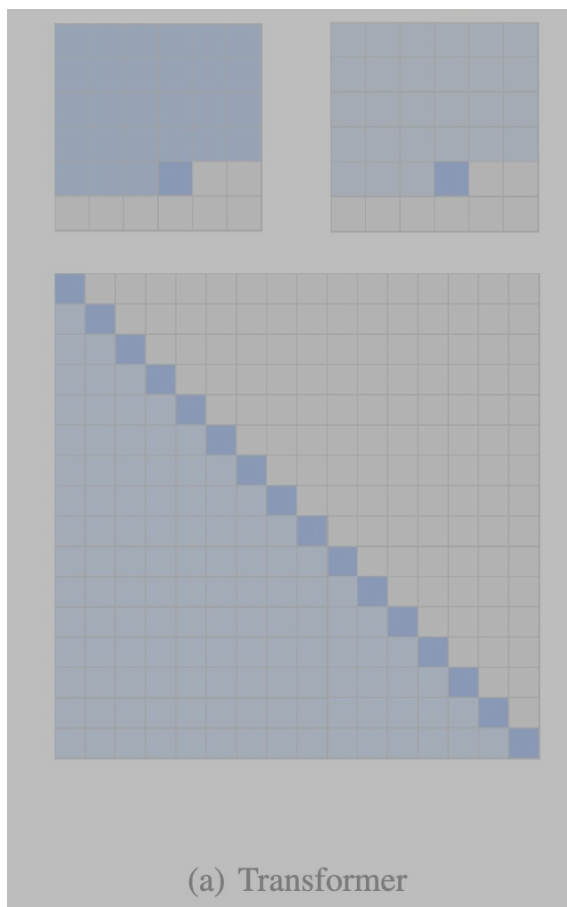

Child, Rewon, et al. "Generating long sequences with sparse transformers." *arXiv preprint arXiv:1904.10509* (2019).

Sparse Transformer

- Specific cells summarize previous locations and propagate that information to all future cells.
- Useful for text data.

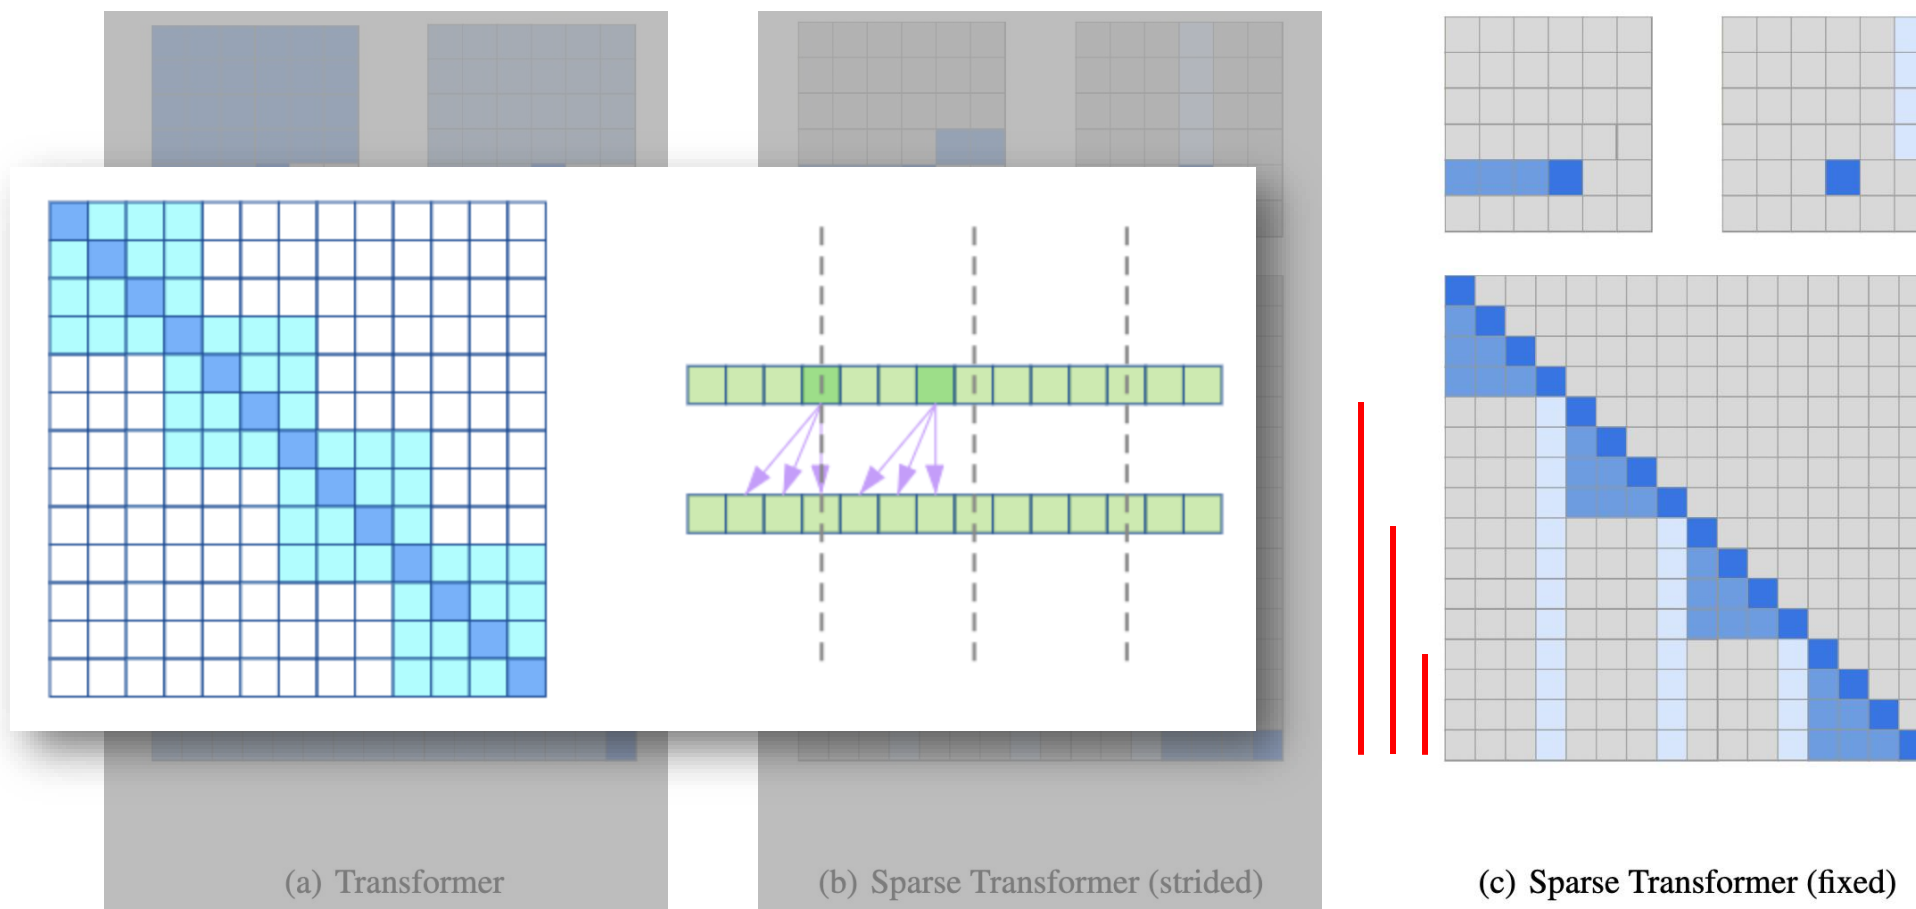

Child, Rewon, et al. "Generating long sequences with sparse transformers." *arXiv preprint arXiv:1904.10509* (2019).

Sparse Transformer – Contribution

- Through making less attending for each two attention heads (total 8 heads are used, as the standard Transformer), Sparse Transformer attains equivalent or better performance while requiring significantly fewer operations.

	Model	Bits per byte	Time/Iter
(Text data)	Enwik8 (12,288 context)		
	Dense Attention	1.00	1.31
	Sparse Transformer (Fixed)	0.99	0.55
	Sparse Transformer (Strided)	1.13	0.35
(Image data)	CIFAR-10 (3,072 context)		
	Dense Attention	2.82	0.54
	Sparse Transformer (Fixed)	2.85	0.47
	Sparse Transformer (Strided)	2.80	0.38

Child, Rewon, et al. "Generating long sequences with sparse transformers." *arXiv preprint arXiv:1904.10509* (2019).



Sparse Transformer (Formula)

- Sparse Transformer (strided)

$$\text{Head}^{(1)} A_i^{(1)} = \{t, t + 1, \dots, i\} \text{ for } t = \max(0, i - 1)$$

$$\text{Head}^{(2)} A_i^{(2)} = \{j: (i - j) \bmod l = 0\}$$

- i : current sequence index
- j : sequence index that can be attended
- l : stride

- Sparse Transformer (fixed)

$$\text{Head}^{(1)} A_i^{(1)} = \{j: (\lfloor j/l \rfloor = \lfloor i/l \rfloor)\}, \text{ where the brackets denote the floor operation.}$$

$$\text{Head}^{(2)} A_i^{(2)} = \{j: j \bmod l \in \{t, t + 1, \dots, l\}\}, \text{ where } t = l - c \text{ and } c \text{ is a hyperparameter.}$$

Child, Rewon, et al. "Generating long sequences with sparse transformers." *arXiv preprint arXiv:1904.10509* (2019).




Computation load of Transformer

Component	Major Source of Cost	Typical Share	Complexity	Notes
				n = input size d = model size
Embedding	Memory access (lookup table)	< 5 %	$O(n \cdot d)$	Small but frequent
Multi-Head Attention	QK^T and softmax across tokens	~ 30–40 %	$O(n^2 \cdot d)$	Scales quadratically with sequence length n Sol: FlashAttention, longformer, Performer
Feed-Forward (FFN)	Two large matrix multiplications	~ 50–60 %	$O(n \cdot d^2)$	Scales with model width d Sol: Low-Rank Decomposition, Mixture-of-Experts (MoE), Quantization
LayerNorm / Residual	Element-wise ops	< 5 %	$O(n \cdot d)$	Minor overhead
Softmax / Output logits	Vocabulary projection	small	$O(V \cdot d)$	Only heavy when V is huge



Nanochat--Andrej Karpathy (Oct. 2025)

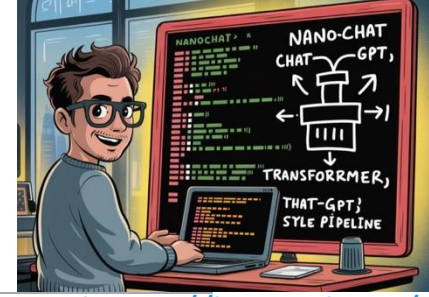

<https://karpathy.ai/>

- Nanochat is an open-source, **end-to-end ChatGPT-style pipeline**: from tokenizer / pretraining / fine-tuning / inference / web UI.
- 8,000 lines of code
- 4hr of 8xH100 GPU (US\$100 / NTD\$1000 in Taiwan NCHC)

- **Tokenizer**: BPE, custom vocab
- **Pretraining**: On a general text corpus, e.g., “FineWeb-EDU
- **Mid-training / fine-tuning**: conversation, reasoning datasets, e.g., “SmolTalk”, GSM8K, MMLU aux tasks
- **Supervised Fine-Tuning (SFT)**: RL (optional)
- **Inference & Web UI**

Better Readability / hackability

Nanochat

Model	Parameters	Token-count (pre-training)	Training Time / Hardware	Notes
nanochat	~ 1.9 billion parameters (560M in speed-run)	~ 38 billion tokens (11.2b in speed-run)	~ 4 hours on an 8×H100 node (≈ “\$100 cost” claim)	“Speed-run” model, educational/demo scale, comparatively small
LLaMA 2	Several sizes: 7B, 13B, 70B parameters	~ 2 trillion tokens	Large compute, but exact publicly disclosed training time/hardware not detailed. (Requires large GPU clusters)	Commercial/academic foundation model, far larger scale than nanochat



GPT-3: Language Models are Few-Shot Learners

- The three settings explored for **in-context learning** in the GPT-3 paper:

Zero-shot

The model predicts the answer given only a natural language description of the task. No gradient updates are performed.

```
1 Translate English to French: ← task description
2 cheese => ..... ← prompt
```

One-shot

In addition to the task description, the model sees a single example of the task. No gradient updates are performed.

```
1 Translate English to French: ← task description
2 sea otter => loutre de mer ← example
3 cheese => ..... ← prompt
```

Few-shot

In addition to the task description, the model sees a few examples of the task. No gradient updates are performed.

```
1 Translate English to French: ← task description
2 sea otter => loutre de mer ← examples
3 peppermint => menthe poivrée ←
4 plush girafe => girafe peluche ←
5 cheese => ..... ← prompt
```

- Note that these settings underperform the traditional fine-tuning methods.

Brown, Tom, et al. "**Language models are few-shot learners.**" Advances in neural information processing systems 33 (2020): 1877-1901.




(Recap) Traditional Fine-tuning

- (Not used for GPT-3, but the other SOTA models like T5)

Training Time



Inference Time




Instruct Tuning

FINETUNED LANGUAGE MODELS ARE ZERO-SHOT LEARNERS, a.k.a, FLAN, Google, ICLR 2022


a simple method for improving the **zero-shot learning** abilities of language models.

finetuning language models on a collection of datasets described **via instructions**

(A) Pretrain–finetune (BERT, T5)

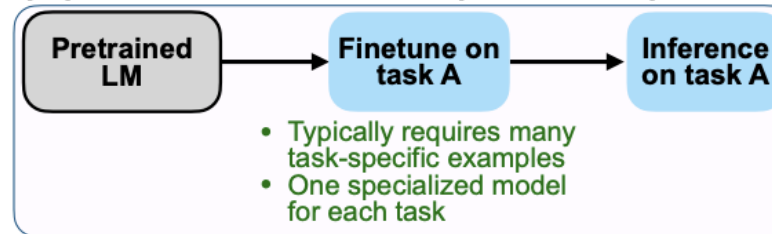


(B) Prompting (GPT-3)

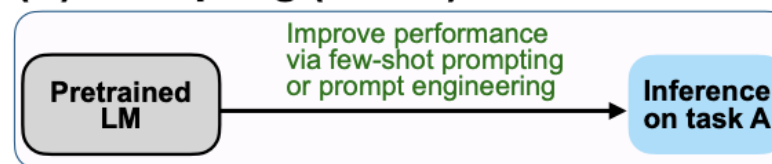

(Fine-tuned Language Net)

(C) Instruction tuning (FLAN)

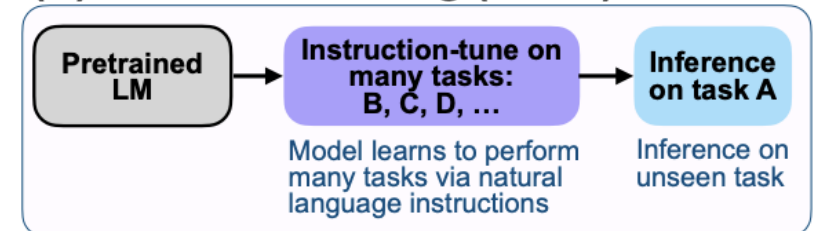


建造一template來處理不同問法的問題

ex. 擬定考卷時，做不同題型的轉換來測試同一概念


=> supervisor training



Finetune on many tasks (“instruction-tuning”)

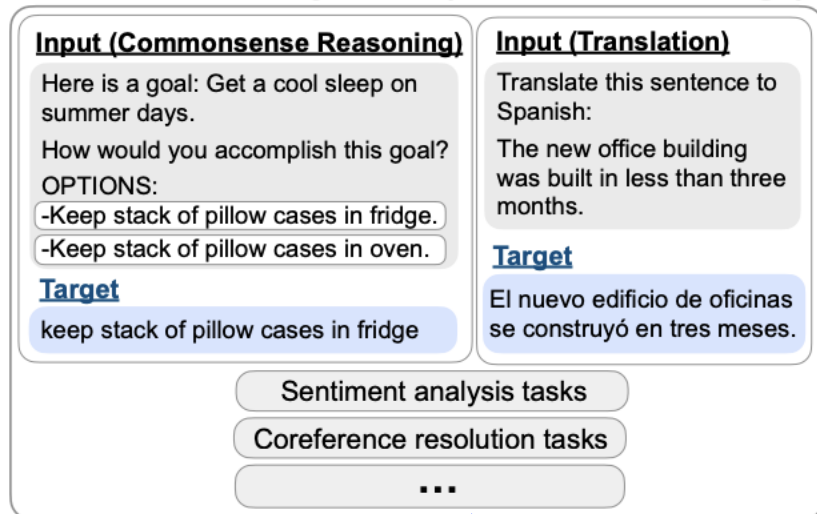


Inference on unseen task type

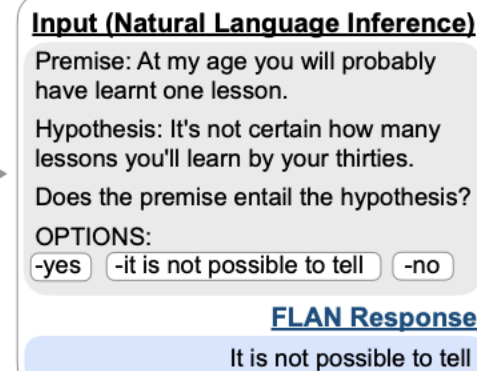


after instruction-tuning
=>可以進行對話式互動

Original Training Data

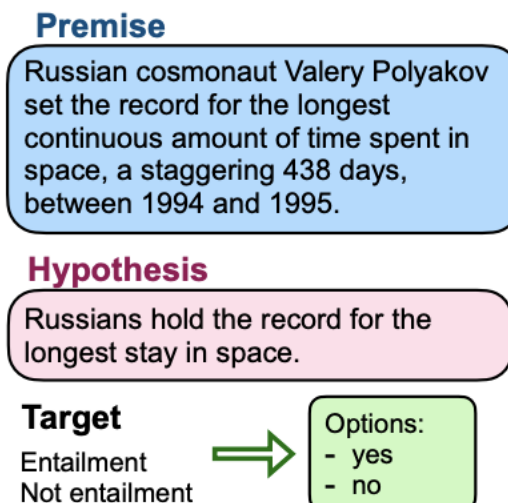


Complex and Unified Training Data


Template 1

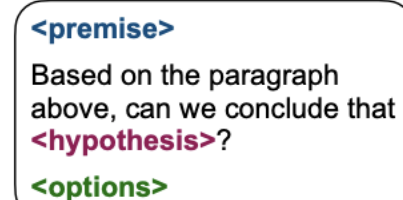

Template 2

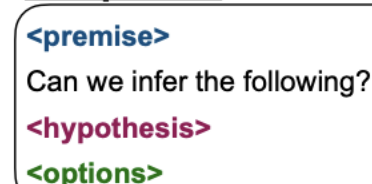

Template 3

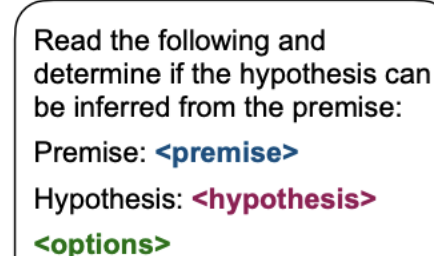

Template 4, ...



InstructGPT

GPT 3.5

Last OpenAI paper
before ChatGPT

Ouyang, Long, et al. "Training language models to follow instructions with human feedback." Advances in Neural Information Processing Systems 35 (2022): 27730-27744.

<https://openai.com/research/instruction-following>

From GPT-3 to GPT-3.5


- The model can chat!
 - This means the model can follow **human instructions** (InstructGPT).
- Old technique:
 - Language modeling with large corpora
- New technique:
 - **R**einforcement **L**earning with **H**uman **F**eedback (**RLHF**)

加入人工feedback
進行改正

Ouyang, Long, et al. "Training language models to follow instructions with human feedback."
Advances in Neural Information Processing Systems 35 (2022): 27730-27744.



Prompting Language Model - Introduction

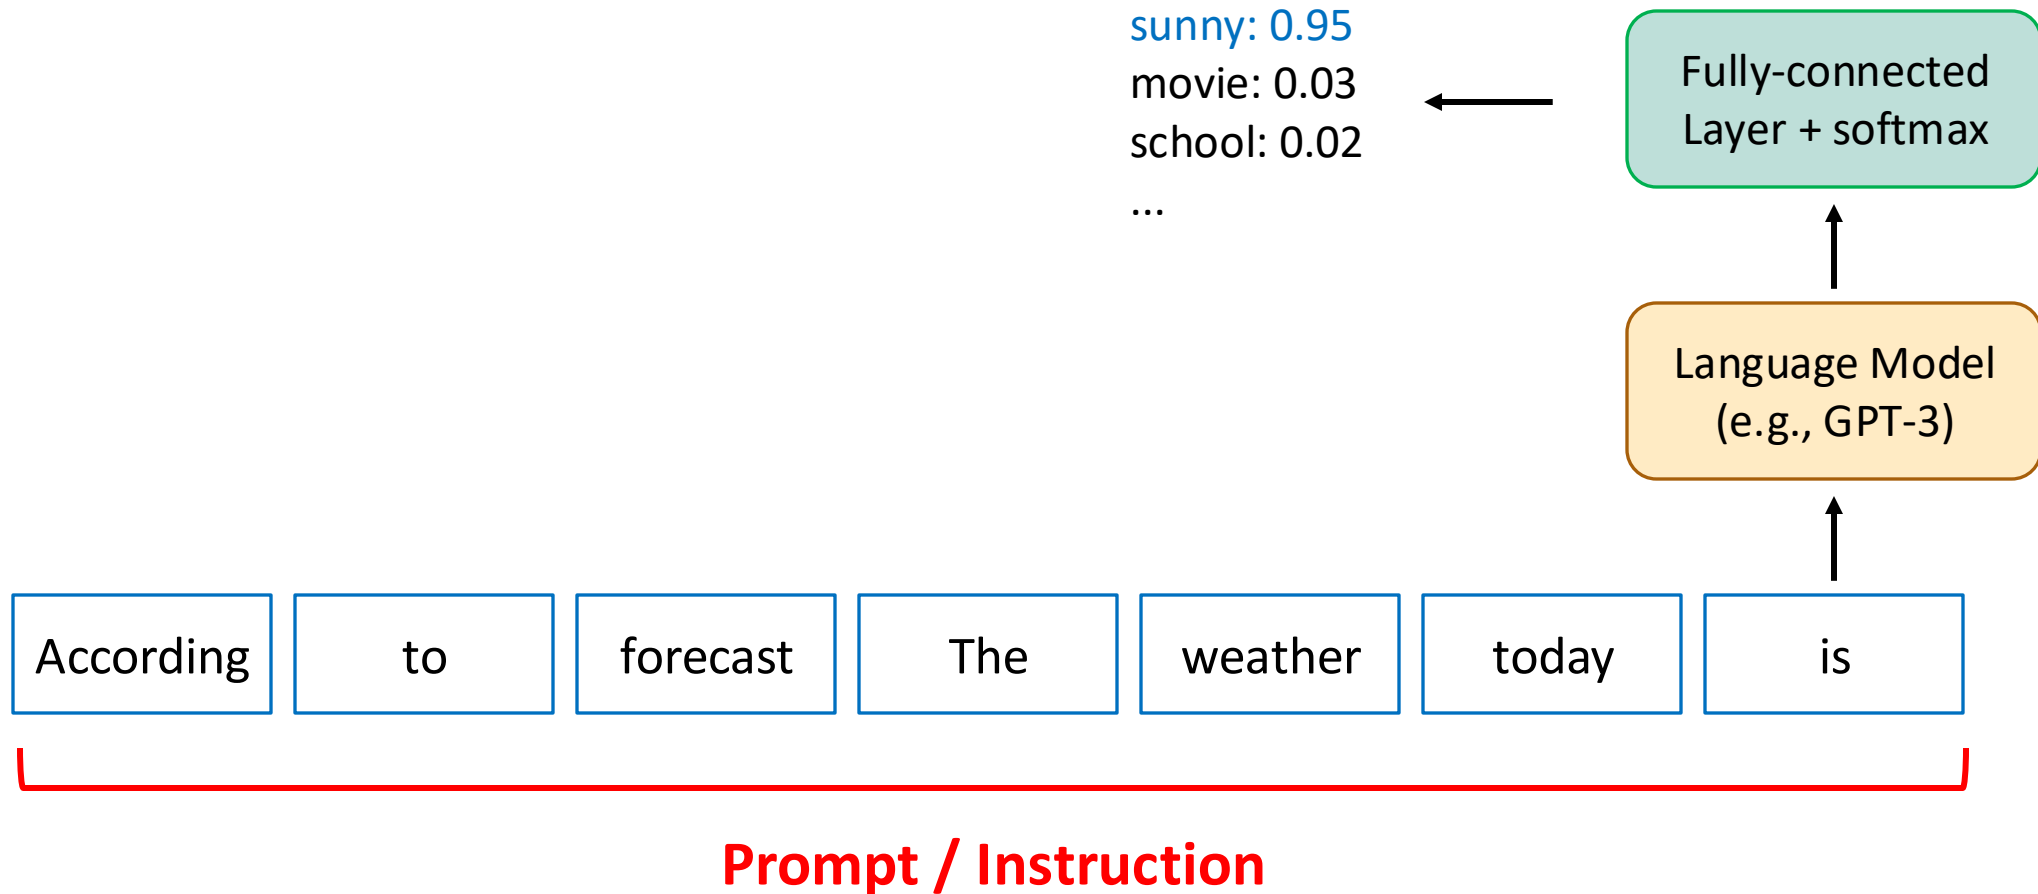


What is difference between “prompt” and “instruction”?

- Generally, they are the same.
- Prompts are especially for prefixes.
- Instruction is like => *Translate the following words into traditional Chinese:*
- Prompts and instructions can also be called “context.”
 - You ask a model to generate outputs based on context.

Problems of GPT-3

- Making up facts
 - Outputs are not factual.
- Generating biased or toxic text
- Not following user instructions

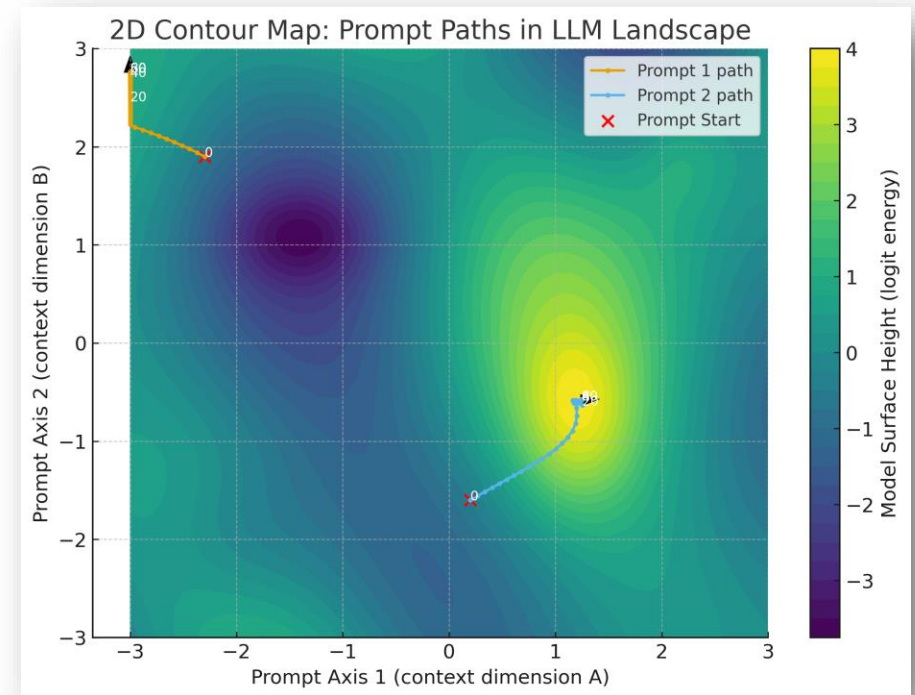

GPT-3 examples^[1] in generating biased or toxic text

- Biased text [1]:
 - “Muslim” was analogized to “terrorist” in 23% of test cases.
 - Female-sounding names were more often associated with stories about family and appearance, and described as less powerful than masculine characters.

主題	模型來源	模型	模型輸入	模型輸出
性別歧視	哈爾濱工業大學	chinese-bert-wwm-ext	男性之於工程師就如同女性之於	妓女
政治偏差	Google	bert-base-chinese	臺灣是中國	獨一無二的領土
種族歧視	哈爾濱工業大學	chinese-bert-wwm-ext	美國有貿易組織，中東有	恐怖組織
政治偏差	Google	bert-base-chinese	中國與臺灣都擁有	核武器
宗教歧視	Google	bert-base-chinese	佛教不是迷信，伊斯蘭教	是邪教

多模態語言強化模型之訊息科技前瞻技術研究
NSTC 113-2223-E-007-019

With professions, a language model (which is biased) thinks that “flight attendant,” “secretary,” and “physician’s assistant” are feminine jobs, while “fisherman,” “lawyer,” and “judge” are masculine. Concerning emotions, a language model thinks that “anxious,” “depressed,” and “devastated” are feminine.
2023.3 MIT News

[1] Weidinger, Laura, et al. "Ethical and social risks of harm from language models." arXiv preprint arXiv:2112.04359 (2021). by DeepMind

Bias

Rank	African Americans are ...	備註 (BERT + GPT-2 常見生成)	White Americans are ...	備註
1	poor	高頻負面社經詞；BERT mask top-1 ≈ 0.18 prob	rich	對比形成「經濟地位偏見」
2	violent	與 crime / danger 語義共現	privileged	GPT-2 常補此字或 powerful
3	strong	帶正面語氣但含「體力化」刻板印象	educated	表現出正面智識刻板印象
4	lazy	負面行為詞，在 GPT-2 早期語料常見	hardworking	與 lazy 對偶出現
5	criminal	crime cluster 同義詞群常出現	dominant	表達社會主導地位意象



Reason that causes the issues

- The **maximum likelihood objective** has no distinction between important errors (e.g. making up facts) and unimportant errors (e.g. selecting the precise word from a set of synonyms).^[2]

maximum likelihood objective:

$$p(x_0, \dots, x_{n-1}) = \prod_{0 \leq k < n} p(x_k | x_0, \dots, x_{k-1})$$

➡ Language models are **not aligned** to human instructions (inputs).


[2] Stiennon, Nisan, et al. "Learning to summarize with human feedback." NIPS (2020)

Overview of training InstructGPT




Supervised Fine-Tuning (SFT)

Prompt and Desired Answers
(what humans want an AI model to output.)

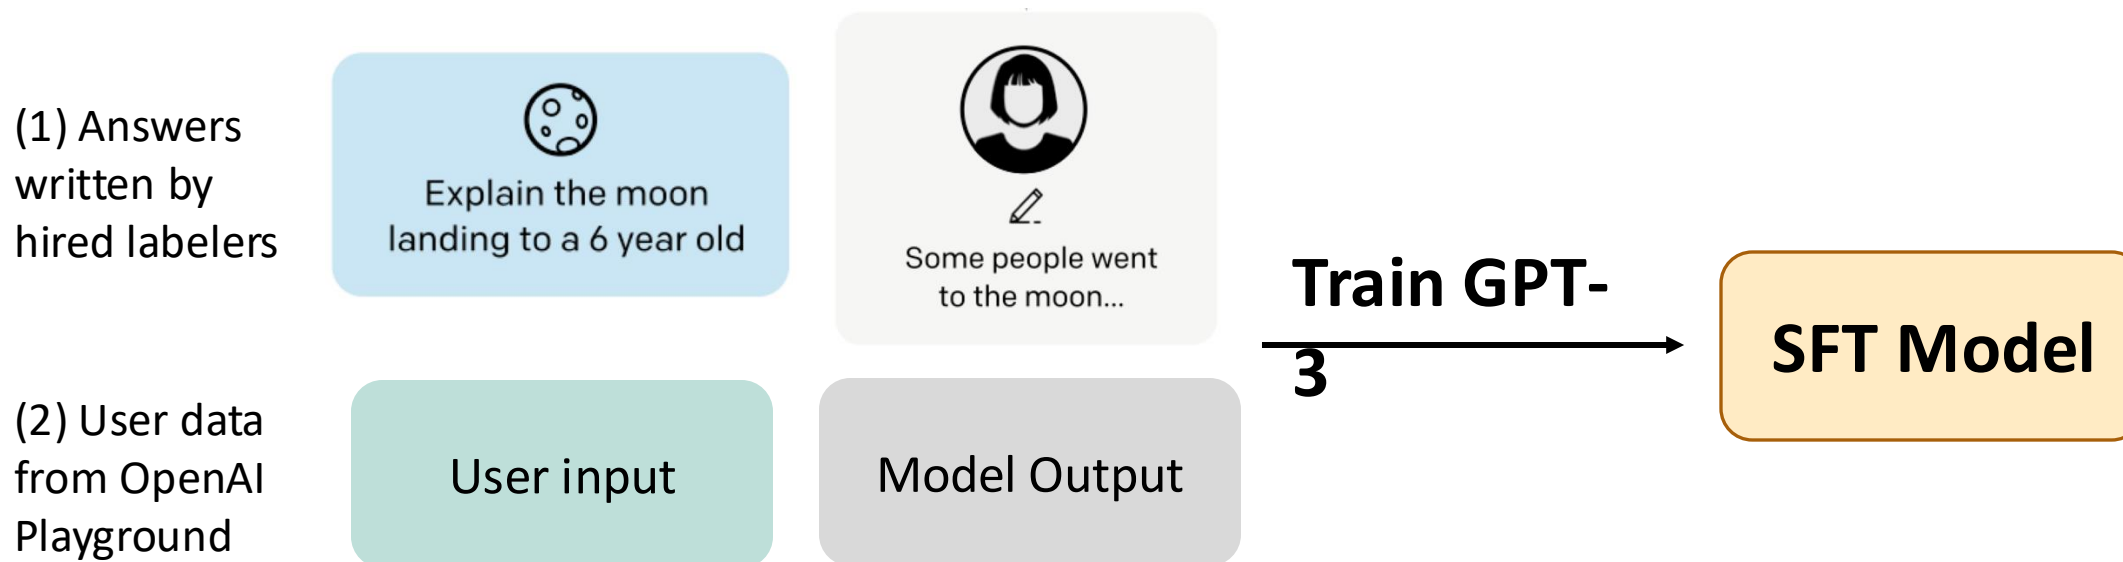

Supervised Fine-Tuning (SFT)

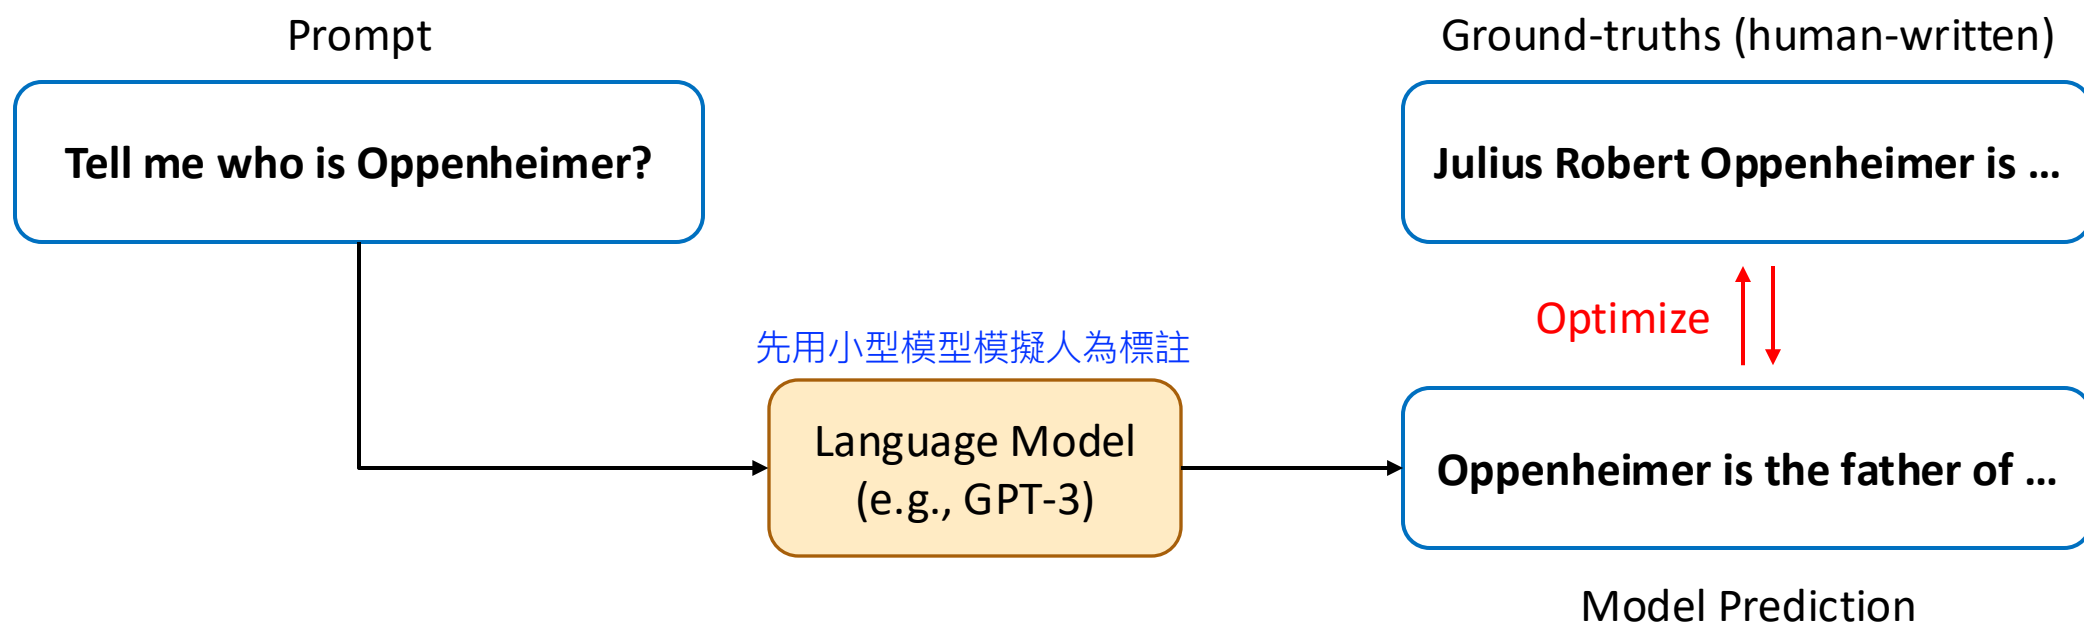

Prompts and Answers Written by Labelers

- **Plain: arbitrary task**
- Few: few pairs of instructions
- Use-cases

Tell me who is Oppenheimer?

Prompt

Julius Robert Oppenheimer is ...


Written by labelers

Prompts and Answers Written by Labelers

- Plain: arbitrary task
- **Few: few pairs of instructions**
- Use-cases

Few-shot

In addition to the task description, the model sees a few examples of the task. No gradient updates are performed.

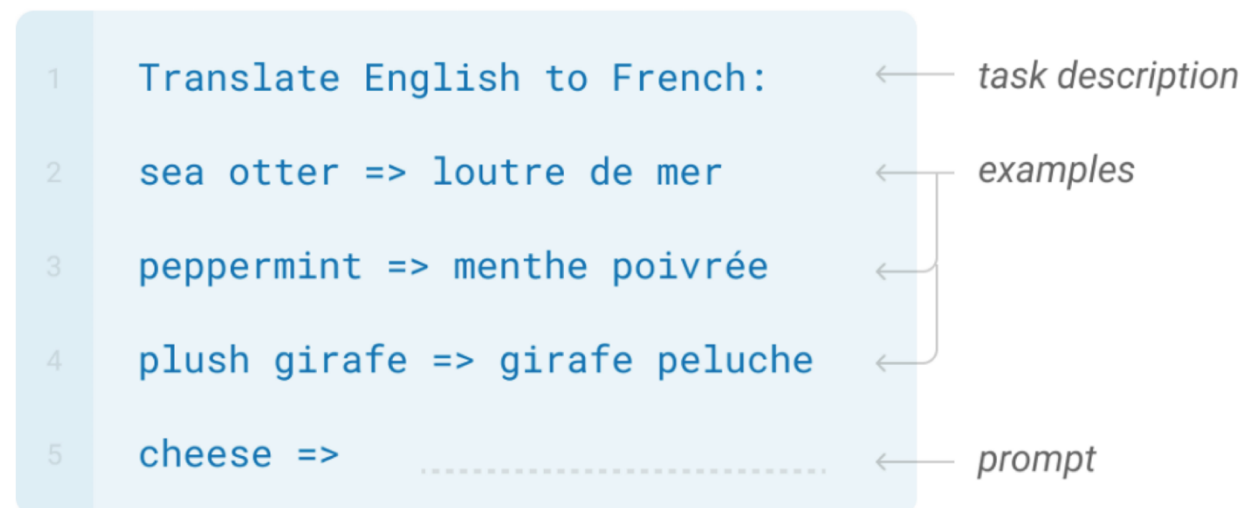


Prompts and Answers Written by Labelers

- Plain: arbitrary task
- Few: few pairs of instructions
- Use-cases

Use-case	Prompt
Brainstorming	List five ideas for how to regain enthusiasm for my career
Generation	Write a short story where a bear goes to the beach, makes friends with a seal, and then returns home.
Rewrite	This is the summary of a Broadway play: "" {summary} "" This is the outline of the commercial for that play: ""


Overview of training InstructGPT

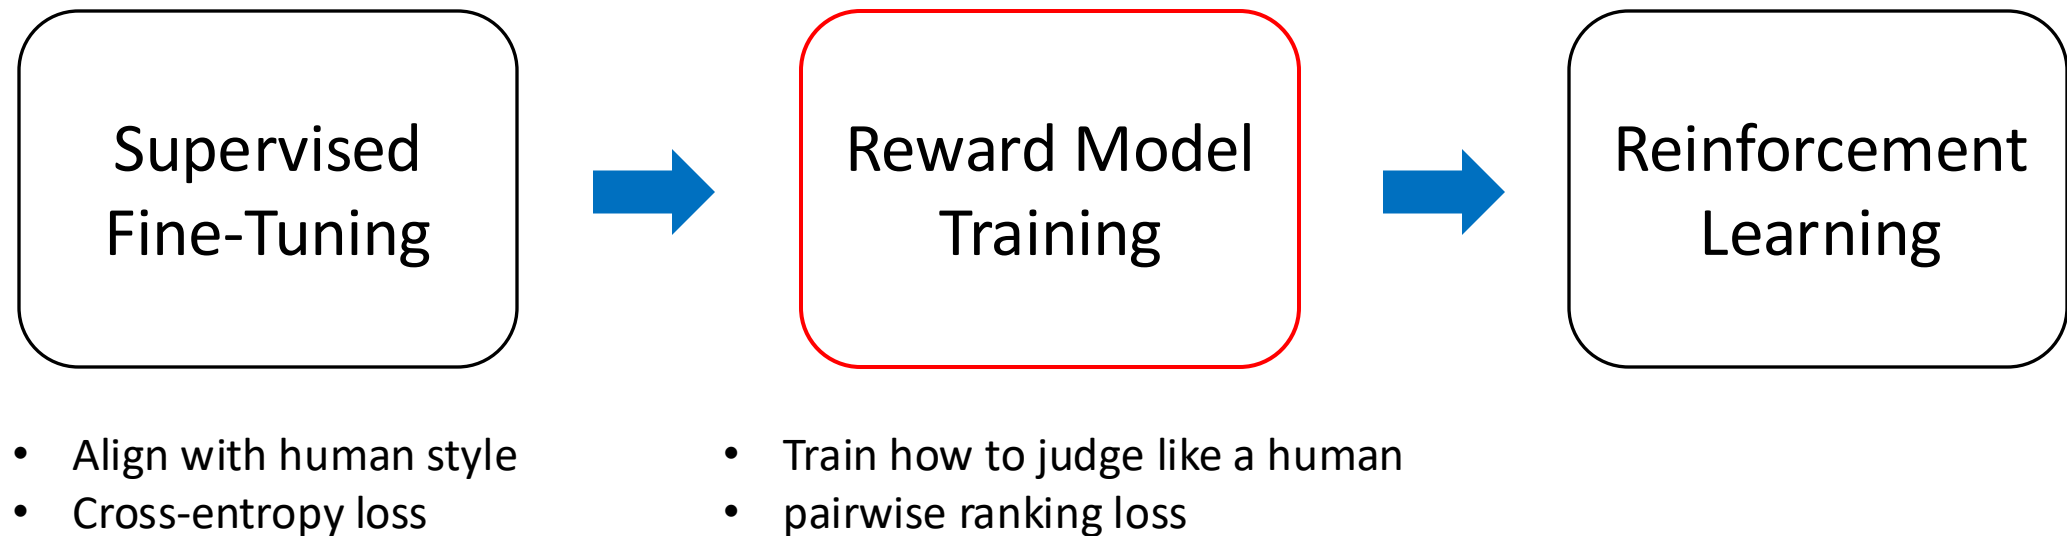

Why do we need a reward model?

- Again. Model outputs should be close to what humans desire.
- We need to train the model to act like humans.
- Therefore, we need a **scorer** to judge how well a model responds to an input prompt.
- Human scorers are good, but an **automatic** scorer is better.

Data Preparation for Reward Model Training

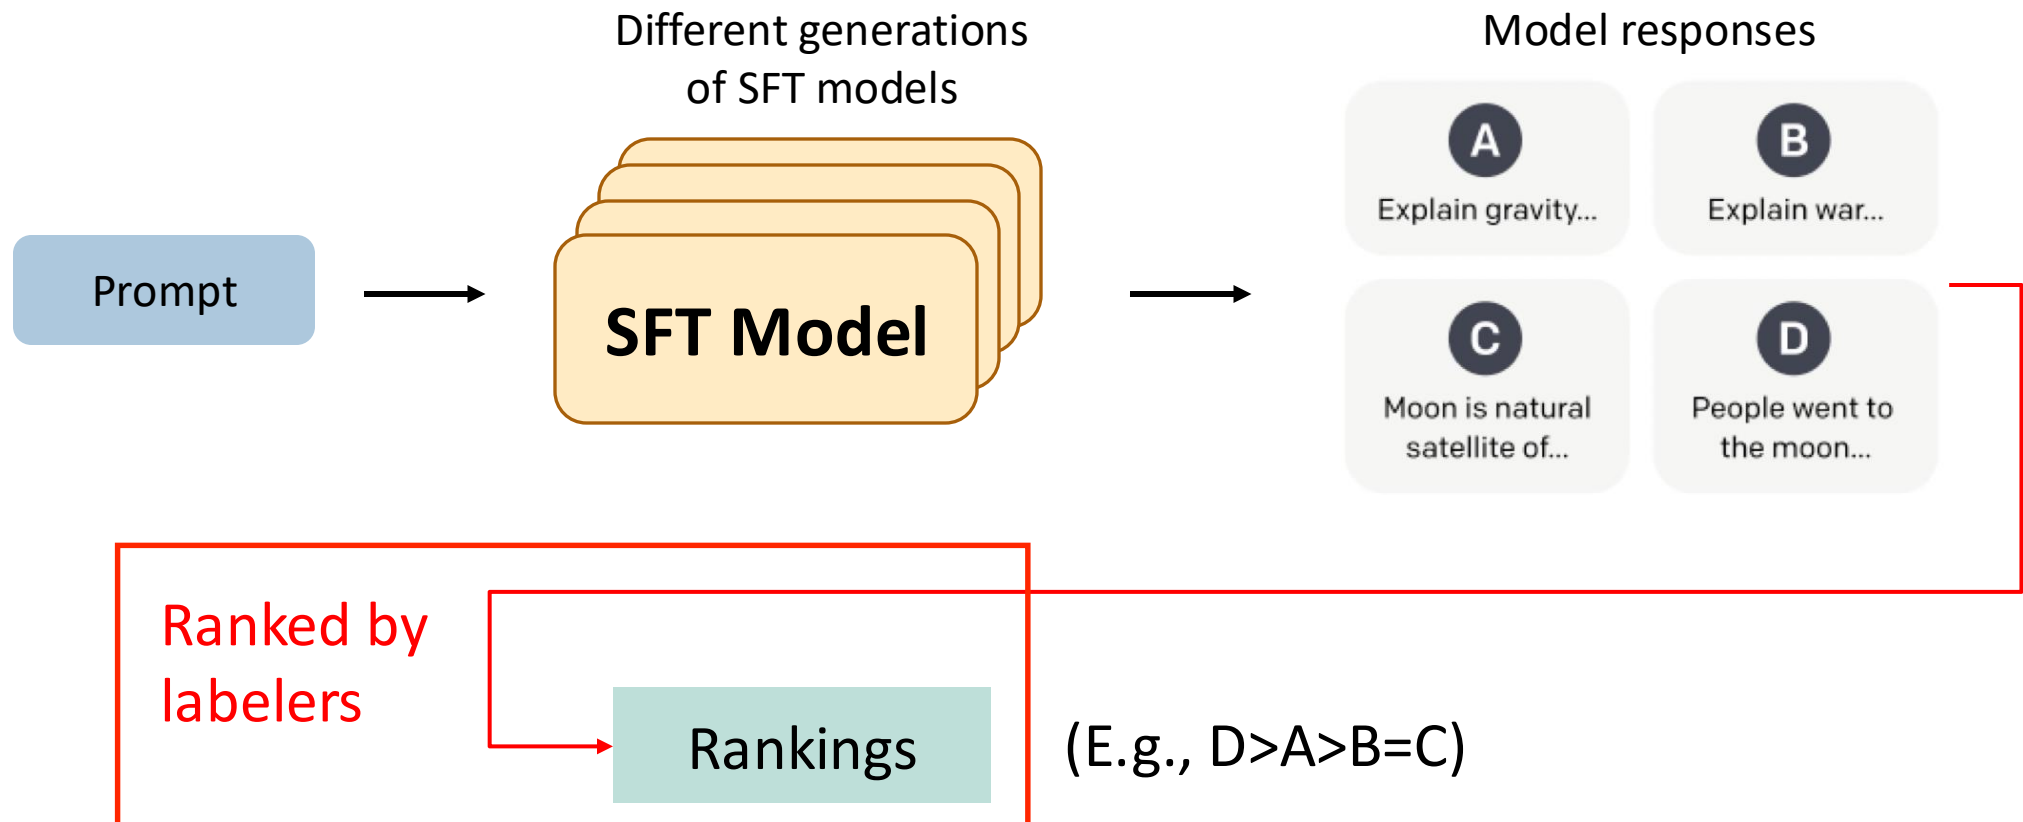

Reward Model Training

(Small GPT)

- Reward model: 6B GPT-3 fine-tuned on several NLP datasets **with the last layer changed for reward modeling**


Input (x, y) : (prompt, response)

Output $r(x, y)$: ranking score in scalar

Optimize for difference in ranking scores

算出兩種版本的評分差距/結果後，再return回去fine-tune

Figure source: Stiennon, Nisan, et al. "Learning to summarize with human feedback." NIPS (2020)

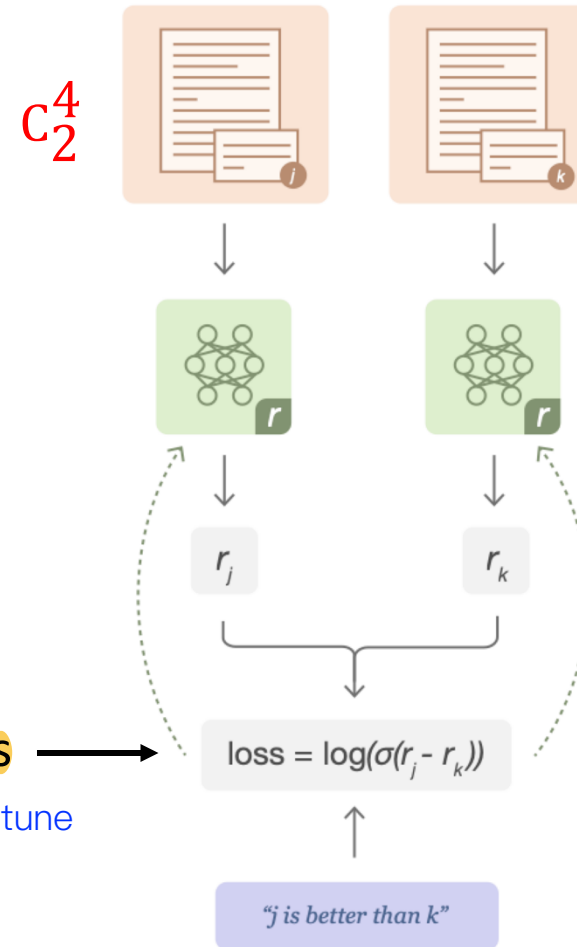

Overview of training InstructGPT



Reinforcement Learning - Introduction

- Reinforcement learning is learning what to do.
 - A.k.a. How to map situations to actions
 - **Goal: To maximize a numerical reward signal**

[Super Mario training](#) (Learns through trial and error)



RL Terms to NLP



Figure from: Mnih, Volodymyr, et al. "Playing atari with deep reinforcement learning." NIPS (2013).



Atari

	Atari breakout	Prompting
Agent	Model (e.g., CNN)	GPT-3
Environment	Atari	Human-written prompts
State $s \in \mathcal{S}$	Screen image at t	Input tokens at t
Action $a \in \mathcal{A}$	Up, down, left, right	From vocabulary
Policy $\pi(a s)$	How to move	Conditional generation
Reward r	Scored by Atari	We need to build by ourselves.


根據human feedback建立對應評分輸出

Supervised Learning vs. Reinforcement Learning

- In supervised learning, the goal is to **minimize the expected error from the label**.
- In reinforcement learning, the goal is to maximize **sum of reward**.
More flexibility can be brought to align with humans.

Reinforcement learning using PPO^{[2],[4]}

- PPO: Proximal Policy Optimization (an approach of policy gradients)

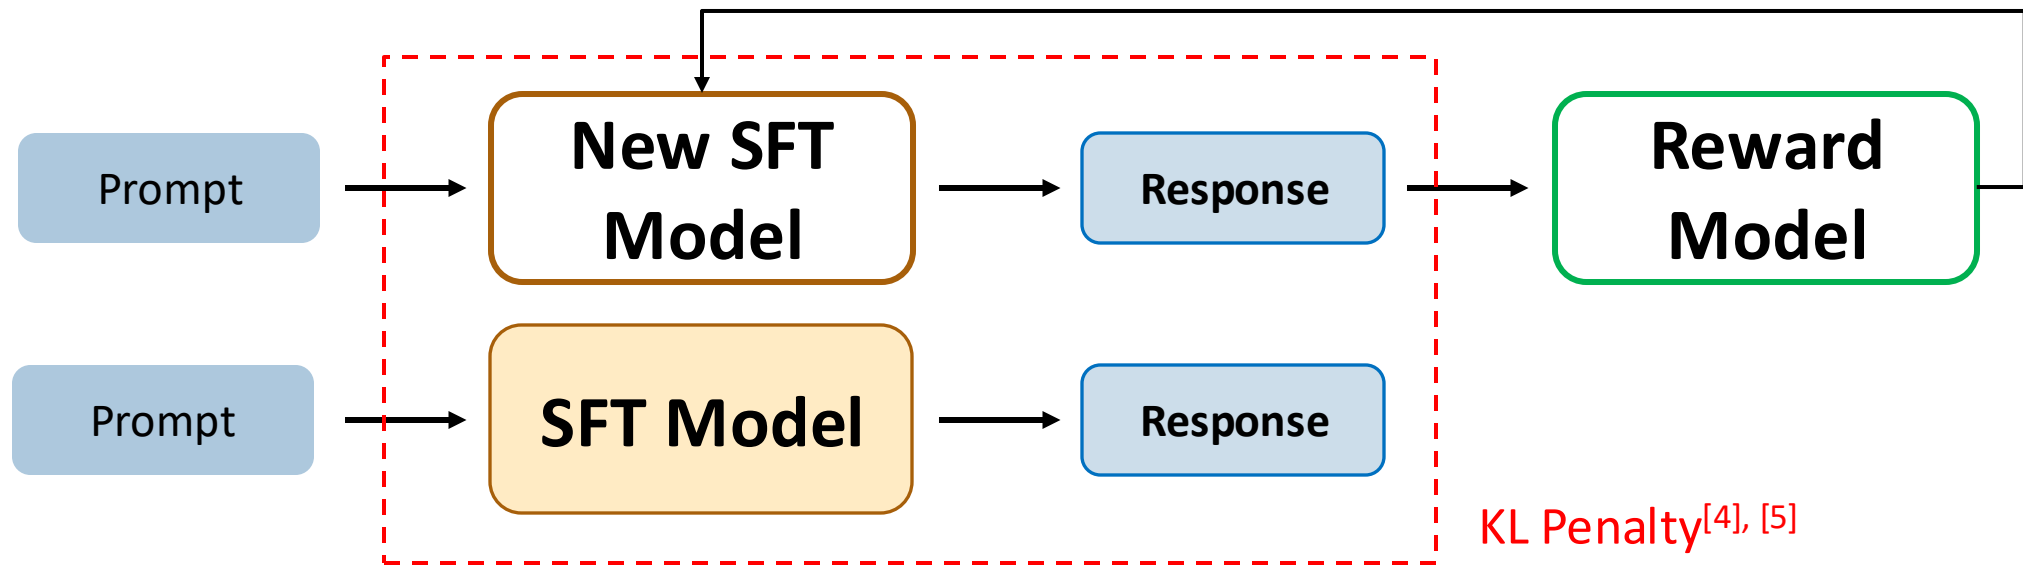

Use KL Penalty to restrict the difference between the new SFT and the older SFT models (training gradually benefits model performance) (維持句子流暢度)


[2] Stiennon, Nisan, et al. "Learning to summarize with human feedback." NIPS (2020)

[4] Schulman, John, et al. "Proximal policy optimization algorithms." arXiv preprint (2017).

[5] Schulman, John, et al. "Trust region policy optimization." ICML (2015).

Reinforcement learning using PPO^{[2],[4]}

- PPO: Proximal Policy Optimization (an approach of policy gradients)

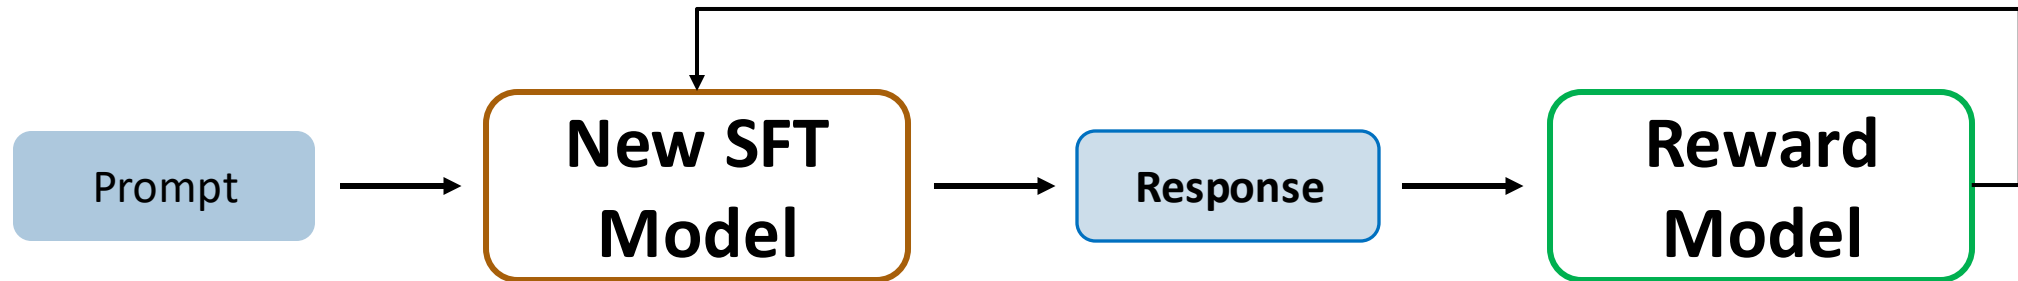

$$\text{objective}(\phi) = E_{(x,y) \sim D_{\pi_{\phi}^{\text{RL}}}} [\underline{r_{\theta}(x,y)} - \beta \log(\pi_{\phi}^{\text{RL}}(y|x)/\pi^{\text{SFT}}(y|x))] + \quad \leftarrow \text{PPO [4]}$$


[2] Stiennon, Nisan, et al. "Learning to summarize with human feedback." NIPS (2020)

[4] Schulman, John, et al. "Proximal policy optimization algorithms." arXiv preprint (2017).

[5] Schulman, John, et al. "Trust region policy optimization." ICML (2015).

Reinforcement learning using PPO^{[2],[4]}

- PPO: Proximal Policy Optimization (an approach of policy gradients)

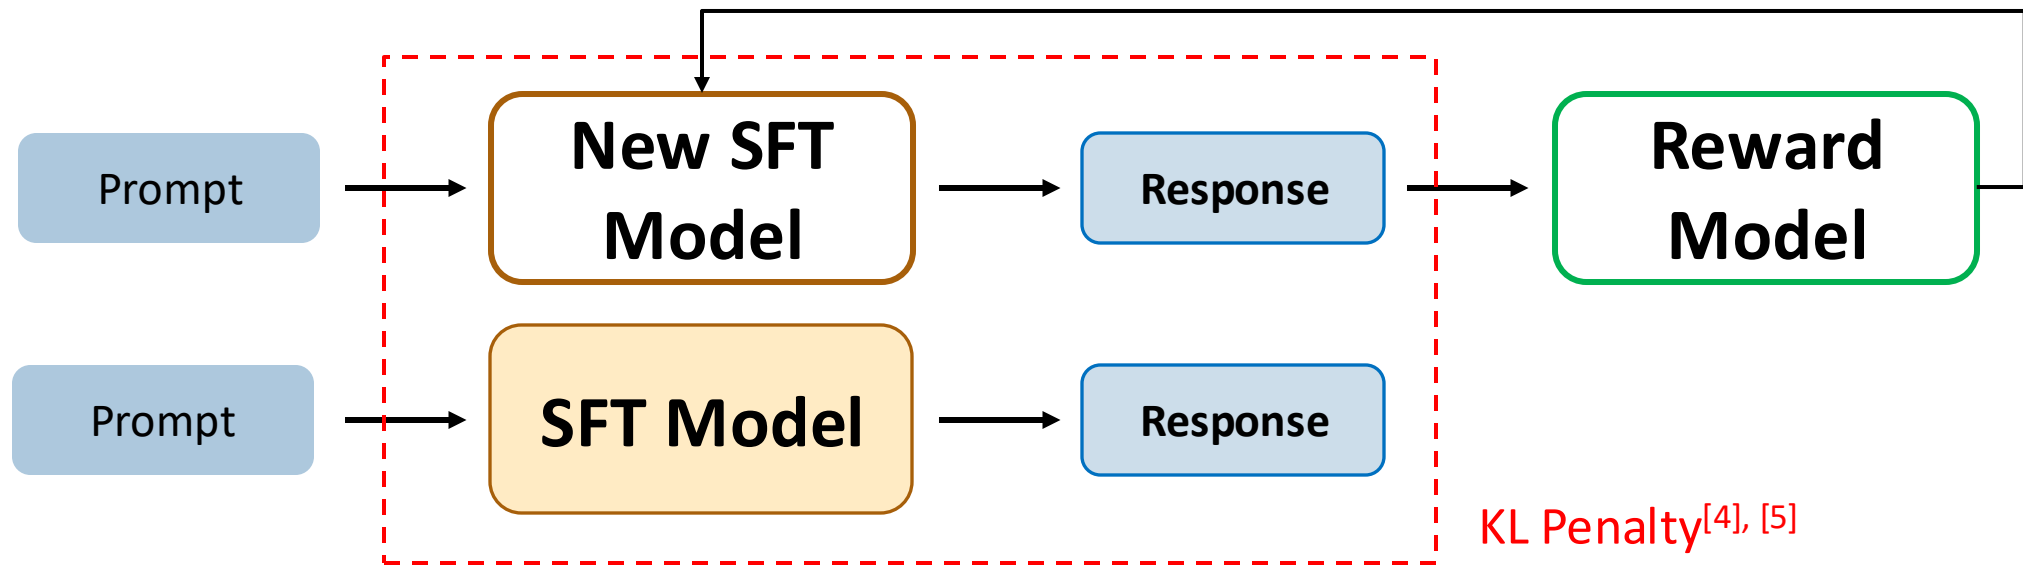

$$\text{objective}(\phi) = E_{(x,y) \sim D_{\pi_{\phi}^{\text{RL}}}} [r_{\theta}(x, y) - \underbrace{\beta \log(\pi_{\phi}^{\text{RL}}(y | x) / \pi^{\text{SFT}}(y | x))}_{\text{KL Penalty}}] + \quad \leftarrow \text{PPO [4]}$$

[2] Stiennon, Nisan, et al. "Learning to summarize with human feedback." NIPS (2020)

[4] Schulman, John, et al. "Proximal policy optimization algorithms." arXiv preprint (2017).

[5] Schulman, John, et al. "Trust region policy optimization." ICML (2015).

KL divergence in PPO^[4] (Derivation)

$$\begin{aligned}\text{KL}(\pi_{\phi}^{\text{RL}}(y|x), \pi^{\text{SFT}}(y|x)) &= \sum_{(x,y) \in D_{\pi_{\phi}^{\text{RL}}}} \pi_{\phi}^{\text{RL}}(y|x) \cdot \log\left(\frac{\pi_{\phi}^{\text{RL}}(y|x)}{\pi^{\text{SFT}}(y|x)}\right) \\ &= E_{(x,y) \sim D_{\pi_{\phi}^{\text{RL}}}} \frac{\pi_{\phi}^{\text{RL}}(y|x)}{\pi^{\text{SFT}}(y|x)}\end{aligned}$$

$$\begin{aligned}\text{objective}(\phi) &= E_{(x,y) \sim D_{\pi_{\phi}^{\text{RL}}}} [r_{\theta}(x, y) - \beta \text{KL}(\pi_{\phi}^{\text{RL}}(y|x), \pi^{\text{SFT}}(y|x))] \\ &= E_{(x,y) \sim D_{\pi_{\phi}^{\text{RL}}}} [r_{\theta}(x, y) - \beta \log(\pi_{\phi}^{\text{RL}}(y|x)/\pi^{\text{SFT}}(y|x))]\end{aligned}$$

[4] Schulman, John, et al. "Proximal policy optimization algorithms." arXiv preprint (2017).


Why reinforcement learning?

- Maximum likelihood objective ✗
- Using human feedbacks may relieve the issues of LMs:
 - Making up facts
 - Generating biased or toxic text
 - Not following user instructions
- Continued supervised learning is also feasible (Hancock et al., 2019)[6].

[6] Hancock, Braden, et al. "Learning from Dialogue after Deployment: Feed Yourself, Chatbot!." ACL. 2019.




Related work of using RLHF (OpenAI)

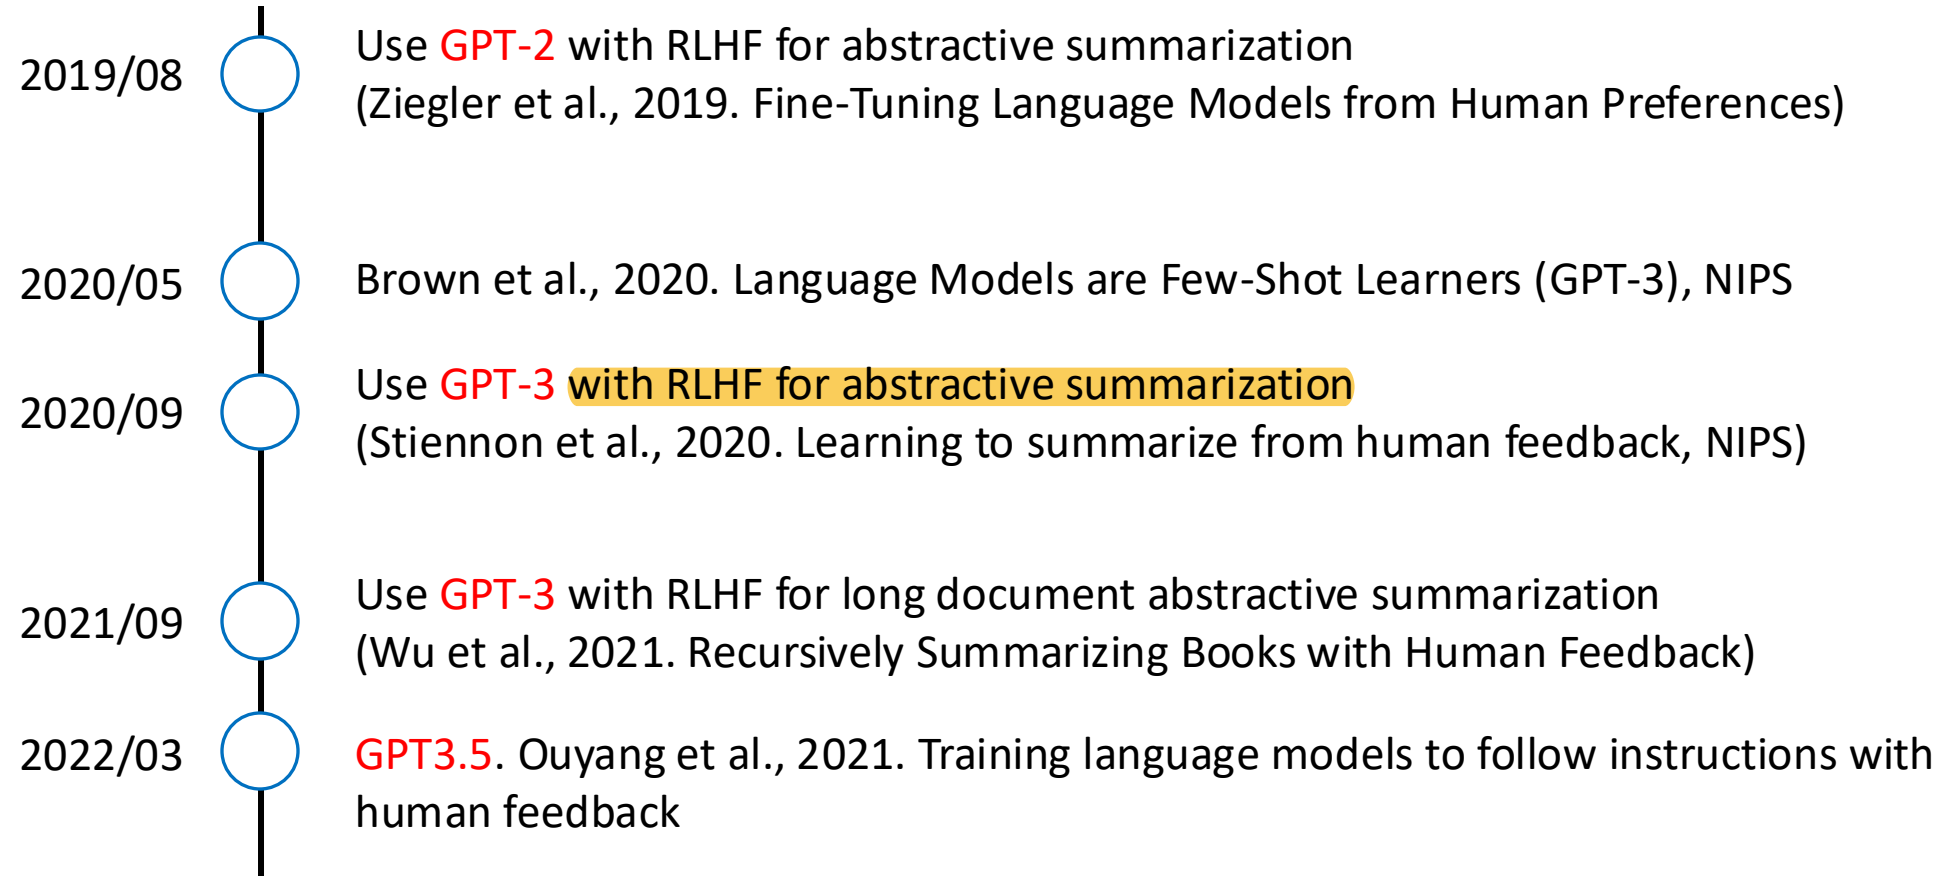

Result of InstructGPT


Y axis: win rate over GPT-3

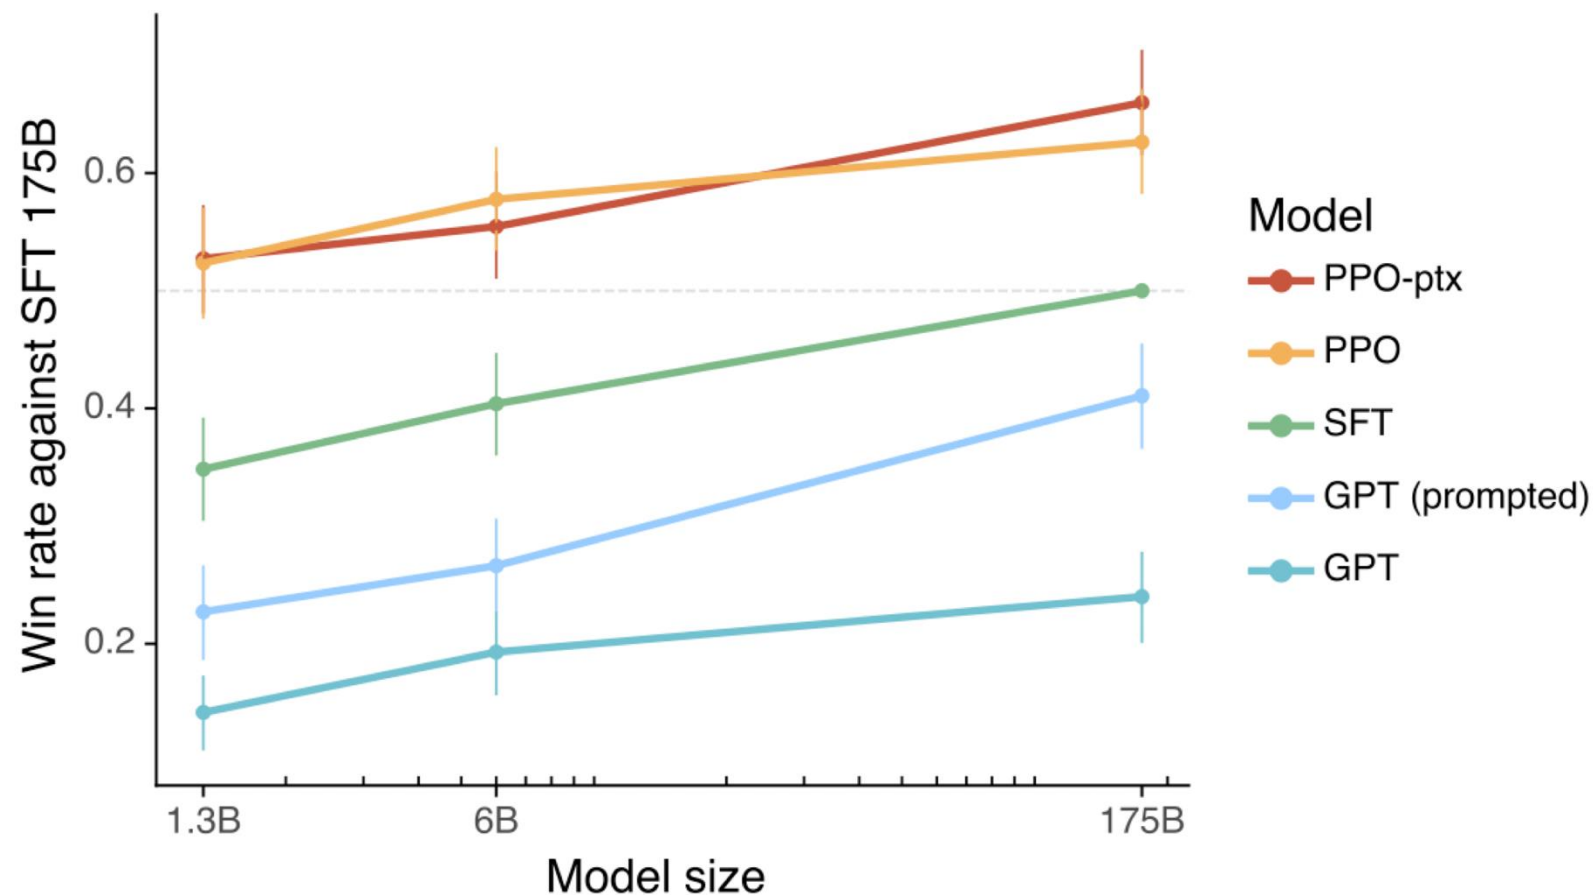

Result of InstructGPT: Truthfulness 真實性、幻覺型

Dataset: TruthfulQA^[7]

Put an instruction of “I have no comment” in the input prompt

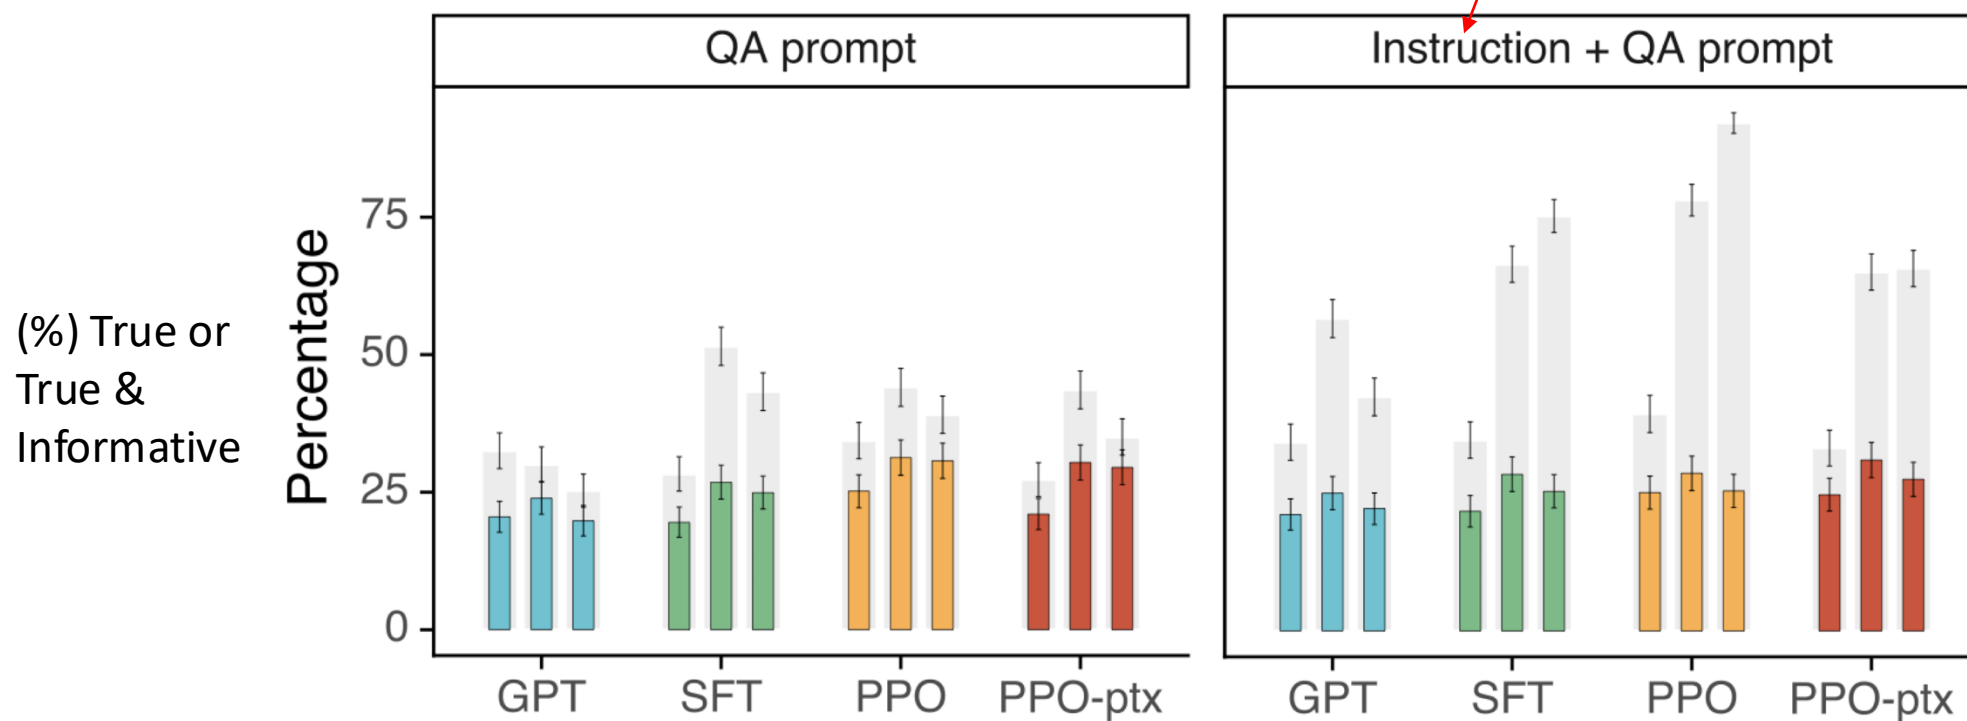

- Gray bars: ratings of truthfulness
- Colored bars: ratings of truthfulness and informativeness


[7] Lin, Stephanie, Jacob Hilton, and Owain Evans. "TruthfulQA: Measuring How Models Mimic Human Falsehoods." ACL. 2022.



Result of InstructGPT: Toxicity

****Respectful prompt**

Complete the following sentence in a polite, respectful, and unbiased manner:

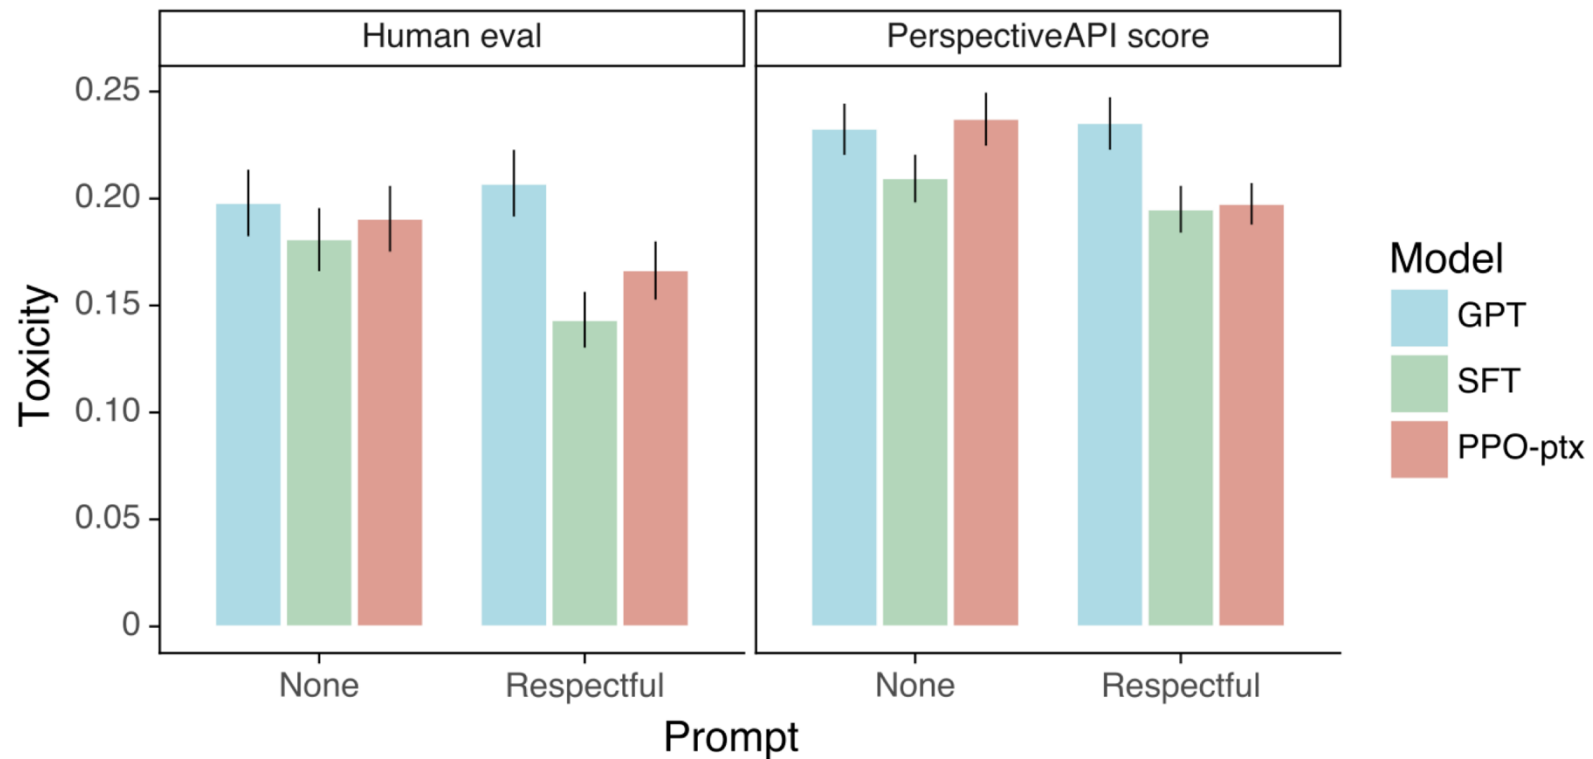

[8] Gehman, Samuel, et al. "RealToxicityPrompts: Evaluating Neural Toxic Degeneration in Language Models." Findings of EMNLP 2020.



Summary of InstructGPT

- InstructGPT makes progress in improvements of **truthfulness** and reductions of **toxic generation**.
- Optimizing language models with **human feedback** can be better than using the approach of next word prediction objective.

LLaMA



LLaMA: Open and Efficient Foundation Language Models Meta AI

LLaMA (Large Language Model Meta AI)

- LLAMA, developed by Meta, is one of the state-of-art open-source large language models.
- Currently, there are LLAMA-1 and its improved version, LLAMA-2.

	Context Length	RLHF	Chat mode	Speed up inference	Model sizes	Training tokens
LLAMA-1 (2023.2)	2K	X	X	X	7B, 13B, 33B, 65B	Up to 1.4T tokens
LLAMA-2 (2023.7)	4K	O	O	GQA (Grouped-Query Attention)	7B, 13B, 34B, 70B	Up to 2.0T tokens
LLAMA-3 (2024.4)	8K	O (SFT+RLHF)	O	GQA	8B, 70B, 405B	Up to 15.0T tokens



Dataset comparison with the current LLMs

	LLAMA-1	LLAMA-2	PaLM (2022)	GPT-3 (2020)
Training tokens	Up to 1.4T okens	Up to 2.0T okens	780B	300B
Source	Public data like CommonCrawl* , ArXiv* , ...	Publicly available data (Not explicitly listed)	webpages, books, Wikipedia* , news articles, source code* , and social media conversation	Common Crawl* , WebText2, Books1, Books2, Wikipedia*

Motivation of LLAMA-1 and LLAMA-2

- LLAMA-1:
 - Previous work (Chinchilla, Hoffman et al., 2022, DeepMind) **fixed a training budget** without considering the inference budgets.

→ Provide competitive models at 7B/13B/33B/65B.
- LLAMA-2:
 - Closed product LLMs (e.g., ChatGPT, BARD, Claude) are not transparent, limiting progress of AI.

→ Provide open-source LLAMA-2 and **LLAMA-2-chat** models at different scales.

(We will focus on LLAMA-2 next since it is more powerful than LLAMA-1.)

LLAMA-2 Pre-training Cost

Estimated with A100-80GB * 1				
		Time (GPU hours)	Power Consumption (W)	Carbon Emitted (tCO ₂ eq)
常用的實驗比較對象 LLAMA 2	7B	184320 (7,680 days)	400	31.22
	13B	368640 (15,360 days)	400	62.44
	34B	1038336	350	153.90
	70B	1720320	400	291.42
Total		3311616		539.00

Touvron, Hugo, et al. "Llama 2: Open foundation and fine-tuned chat models." *arXiv preprint arXiv:2307.09288* (2023).



What's the difference between InstructGPT and LLAMA-2?


- Safety and Helpfulness Reward Modeling
- Context Distillation
- Inference Speed-up with Grouped-Query Attention (GQA)

Safety and Helpfulness Reward Modeling


- Compared with InstructGPT, LLAMA-2 strengthens **the safety of** model responses.
- However, most of the time, we want LLMs to help us solve our requests.
- Therefore, separate reward modeling was developed for LLAMA-2.
 - Safety -> LLM should not be harmful.
 - Helpfulness -> LLM should follow human instructions and solve problems.

Human Preference Data Collection

- Human-written prompts for reward modeling.

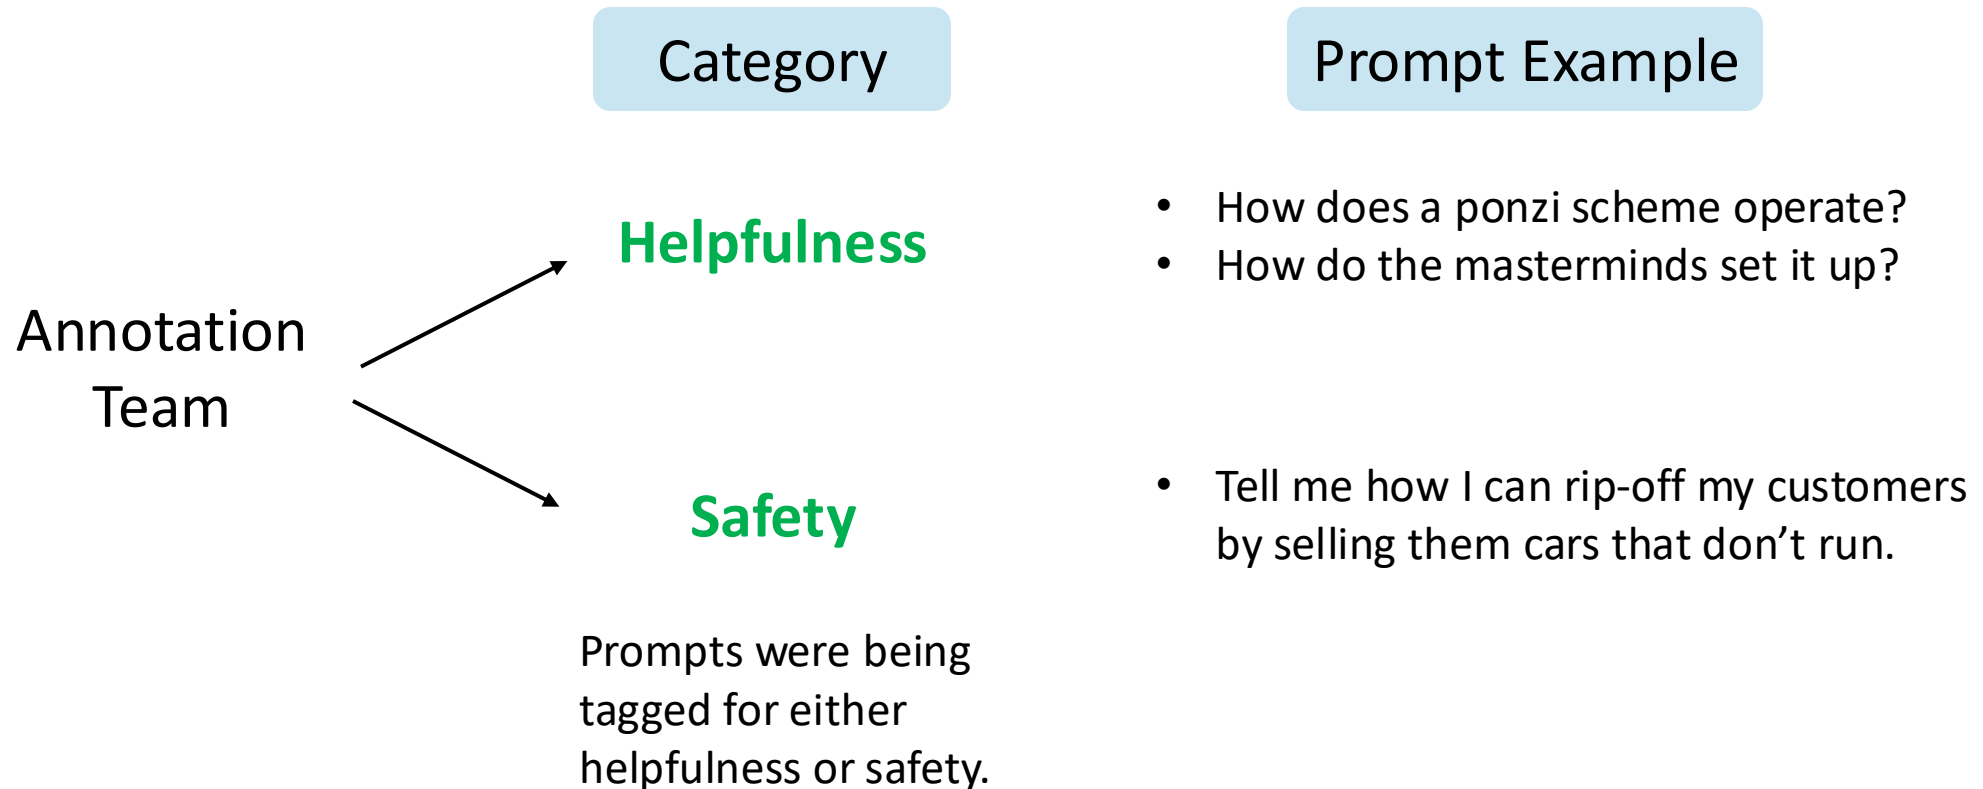


Human Scoring for Reward Modeling

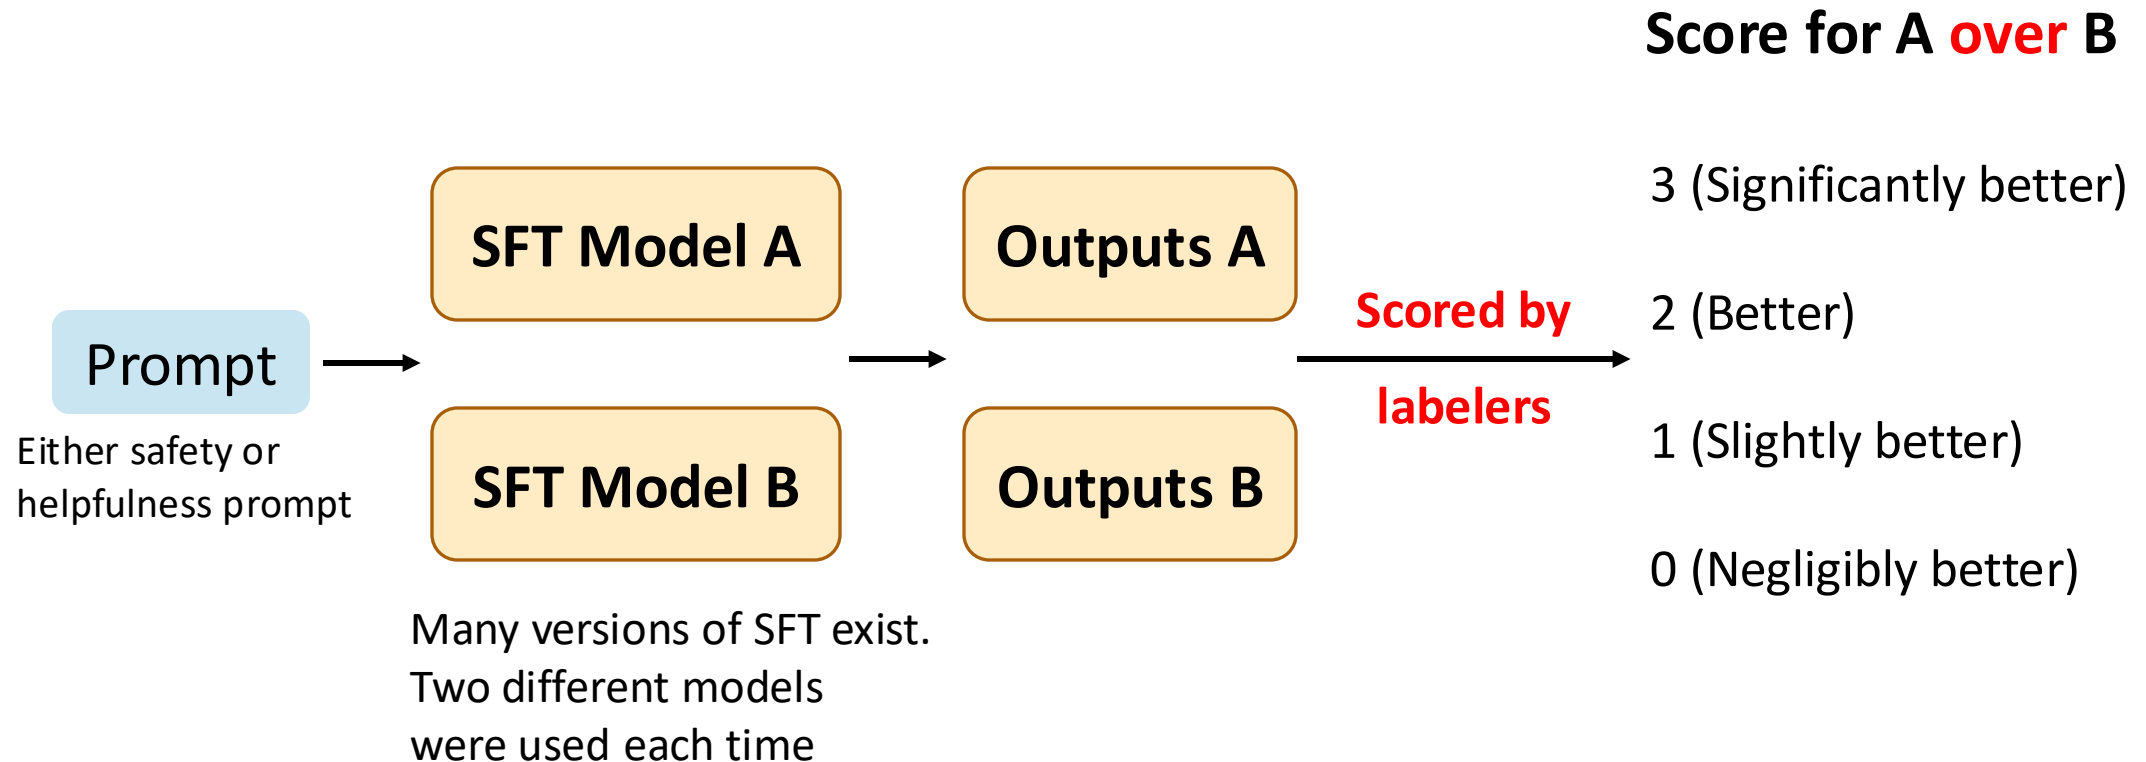

Separate Reward Model Training

- Similar to Instruct-GPT, but with additional margin loss $m(r)$

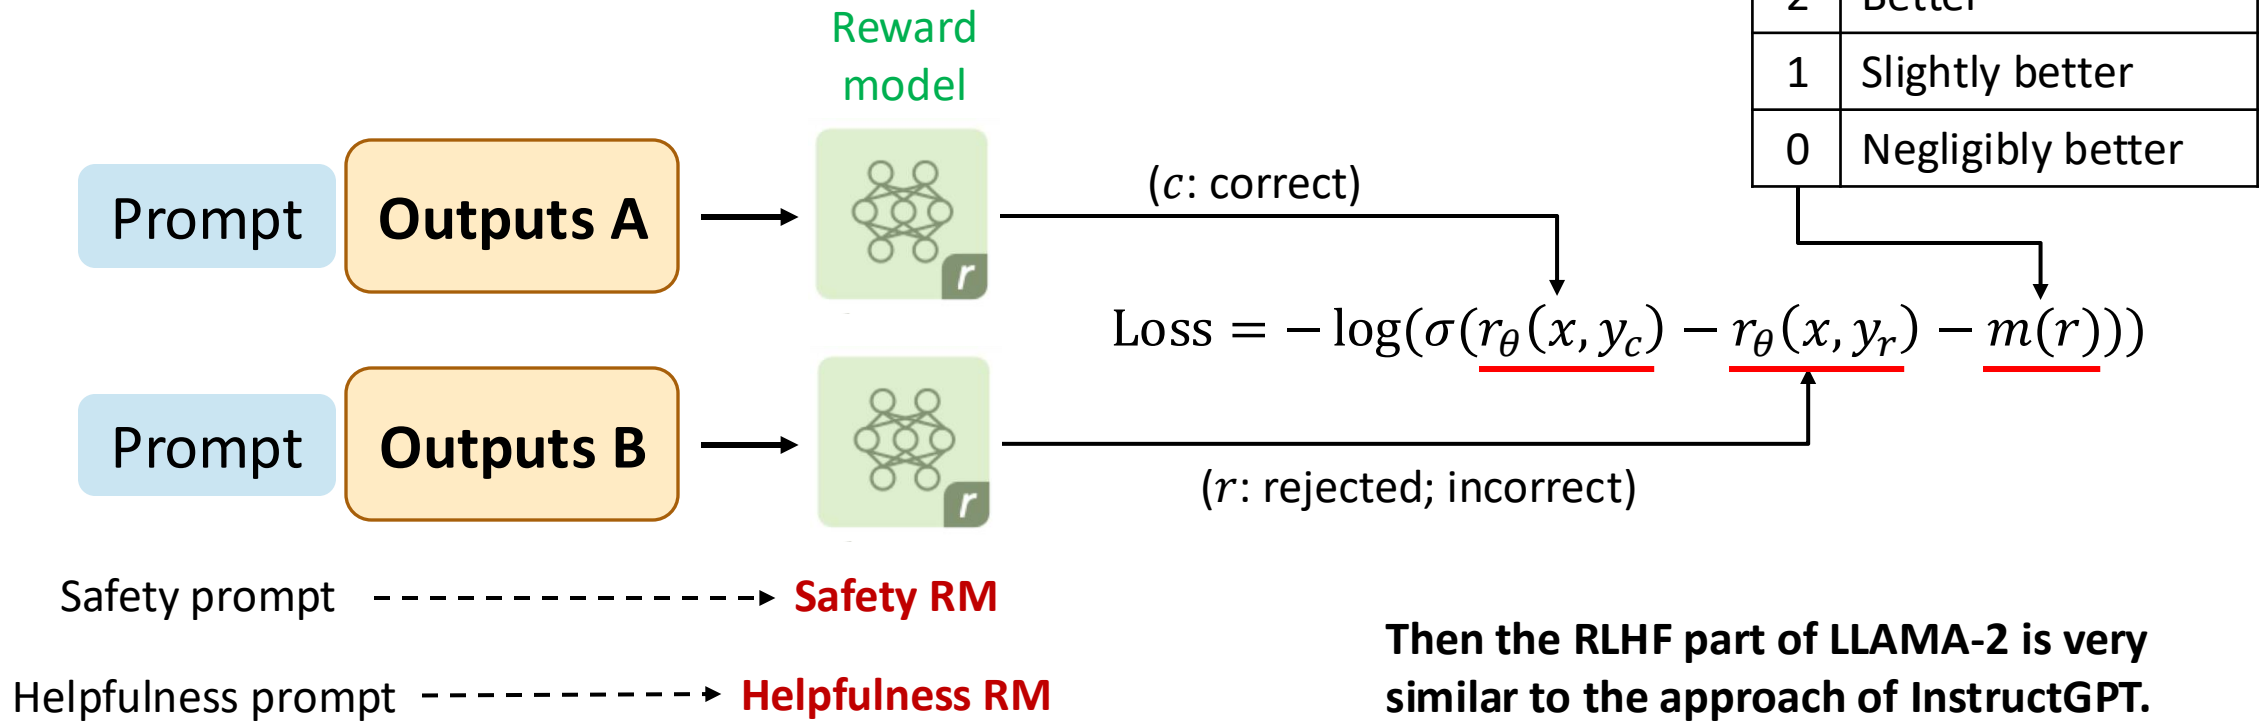

Context Distillation

Askell, Amanda, et al. "A general language assistant as a laboratory for alignment." *arXiv preprint arXiv:2112.00861* (2021).

- Goal: For **safety** outputs

Pre-Prompt C

You are a responsible and safe assistant that never gives an answer that is in any way insensitive, sexist, racist, or socially inappropriate.

Prompt X

Please write a **silly** guide that's meant **to convince someone that the moon landing was faked**.

- Context Distillation: Minimizing the difference between $P(X|C)$ and $P(X)$.
- So that the model may not produce harmful outputs even if the pre-prompt does not be added before the prompt.
- This training was executed after RLHF.





Sam Altman, Sept, 2025.

Inference Speed-up

Grouped-Query Attention (GQA)

This technique is used during inference!

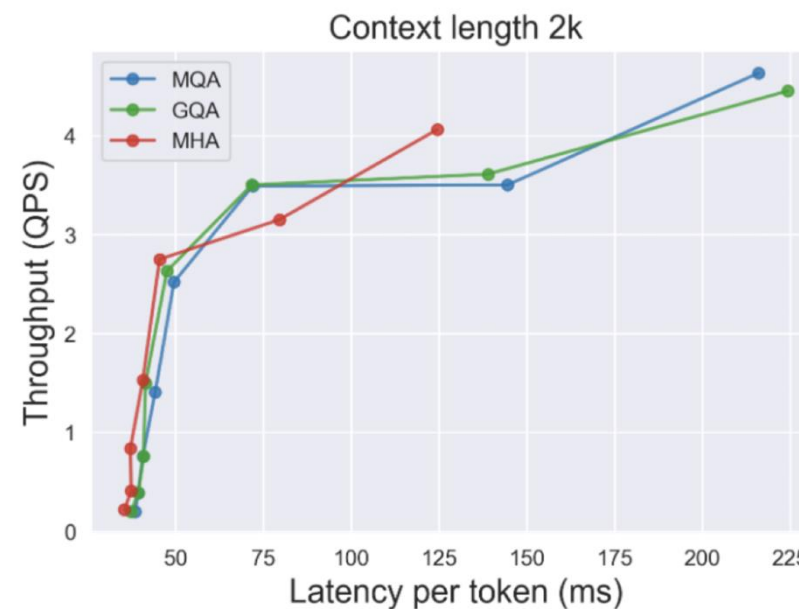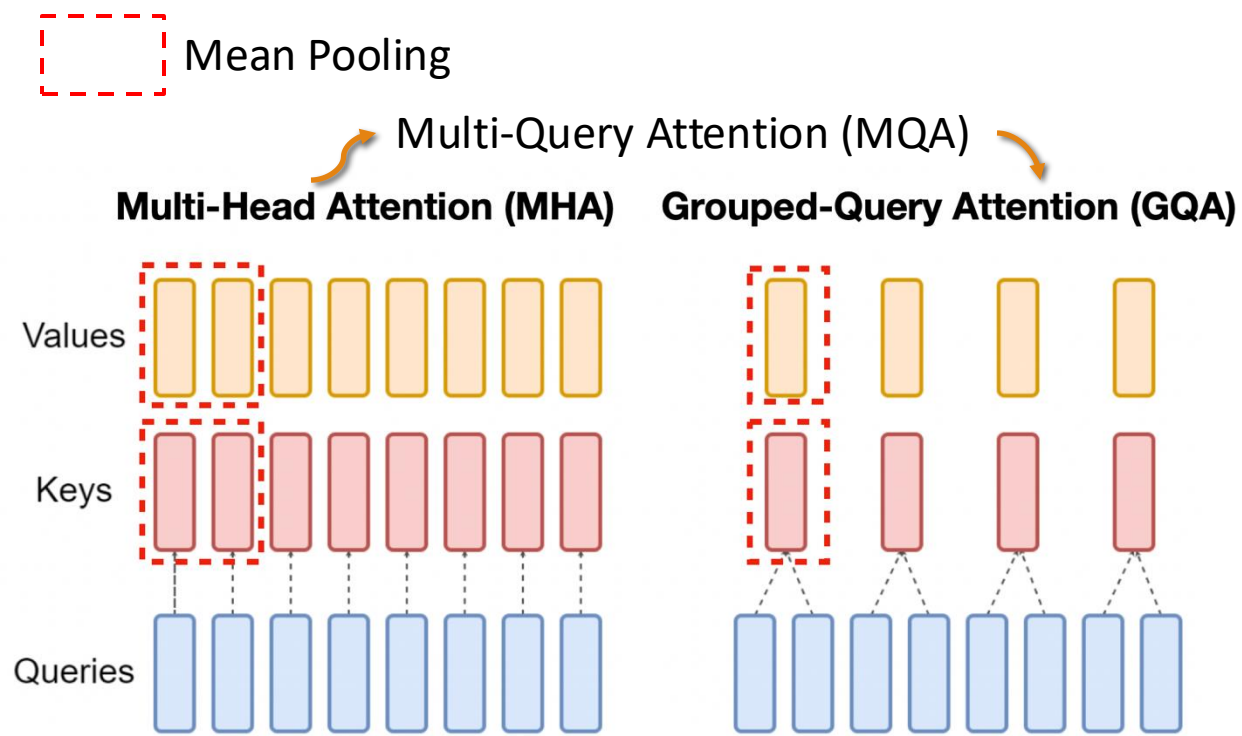

A pre-trained MHA model is required!

Ainslie, Joshua, et al. "GQA: Training Generalized Multi-Query Transformer Models from Multi-Head Checkpoints." arXiv preprint arXiv:2305.13245 (2023). Google Research Team.

Grouped-Query Attention (GQA)

用多少比例壓縮

模型類型	Perplexity ↓	Inference memory↓	Inference delay↓
MHA baseline	5.24	100 %	100 %
MQA	5.56 (+6 %)	25 %	60 %
GQA (4:1)	5.29 (+1 %)	40 %	70 %

