
Computer Science 275 Project Topic 3 : University Course Registration System

Contents

Enchanced Entity-Relationship (EER) Diagram
EER Diagram
Assumptions
Entities and Attributes
Relationships
Relational Model
Relational Model
Mapping the EER Diagram to the Relational Model
Tables
SQL Statements
Creating The Tables
Important Note
Student Functionalities
Faculty Functionalities
Admin Functionalities
SQL Statements for Testing 2
Insert a New Course
Register a Student for a Course
Retrieve a Student's Course Schedule
Update Course Capacity After Registration
List Courses with Prerequisites
Login System
Login bystom
SQL Sample Data

Enchanced Entity-Relationship (EER) Diagram

EER Diagram

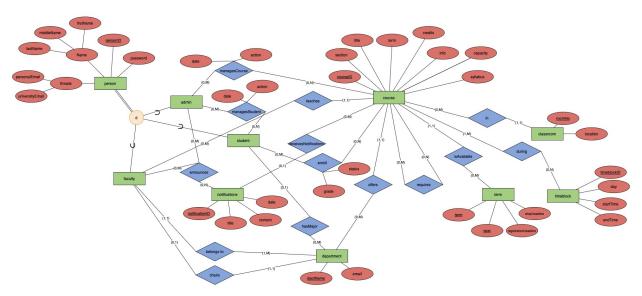

Assumptions

- A person must be either a faculty member, a student, or an admin. They cannot be more than one, or none of these.
- A faculty member does not have to each any courses.
- A student does not need to take any courses.
- A student, faculty, and admin cannot have the same ID. This value is unique across all tables.

Entities and Attributes

• Person

- Attributes: <u>personID</u>, Name (firstName, middleName, lastName), Emails (personalEmail, universityEmail), password
- Specializations:
 - * Admin


- * Student
- * Faculty
- Course
 - Attributes: <u>courseID</u>, section, title, term, credits, info, capacity, syllabus
- Department
 - Attributes: deptName, email
- Classroom
 - Attributes: roomNo, location
- Term
 - Attributes: <u>term</u>, year, registrationDeadline, dropDeadline
- Timeblock
 - Attributes: timeblockID, day, startTime, endTime
- Notifications
 - Attributes: notificationID, title, content, date

Relationships

- Faculty (0,1) Chairs (1,1) Department
- Faculty (1,1) **BelongsTo** (1,M) Department
- Faculty (0,M) **Teaches** (1,1) Course
- Student (0,M) Enroll (0,N) Course
 - Attributes: grade, status
- Student (0,1) hasMajor (0,M) Department
- Department (0,M) Offers (1,1) Course
- Course (0,M) Requires (0,N) Course
- Course (0,M) **In** (1,1) Classroom
- Course (1,M) **During** (0,N) Timeblock
- Course (1,1) IsAvailable (0,M) Term
- Admin (0,M) ManagesCourse (0,N) Course
 - Attributes: date, action
- Admin (0,M) ManagesStudent (0,N) Course
 - Attributes: date, action
- Faculty, Admin (0,M) **Announces** (0,1) Notifications
- Course (0,M) **ReceivesNotification** (0,1) Notifications

Relational Model

Relational Model

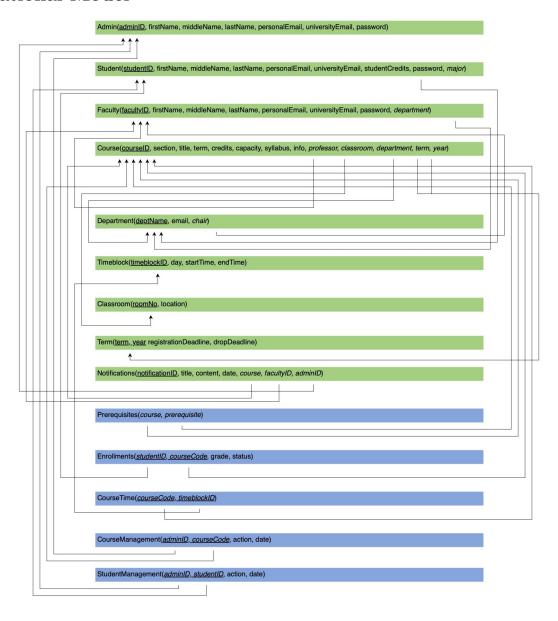

Mapping the EER Diagram to the Relational Model

• Generalization:

The Person entity is generalized into three entities: Student, Faculty, and Admin. While this means that we do have some duplicate attributes in these entities, we will not need to any joins in order to retrieve all the information about these entities. This is helpful since these entities are referenced frequently.

• Composite Attributes:

- The Person entity (and thus the Student, Faculty, and Admin entities) have two sets of composite attributes, being Name, and Emails. We opted to separate these into multiple attributes, this means that Name became the attributes (firstName, middleName, lastName), and Emails became the attributes (personalEmail, universityEmail).

• Weak Entities:

- We do not have any weak entities in our EER diagram to map.

• Recursive Relationships:

The Requires relationship is a recursive relationship since it contains any prerequisites a course may have. This is also a many-to-many relationship since a course can have multiple prerequisites, and a course can be a prerequisite for many other courses. Since this relationship is many-to-many, we must create a new table called Prerequisites. This table contains only the course, and prerequisite.

• 1 - 1 Binary Relationships:

- The Chairs relationship is a 1 - 1 binary relationship since a department can only have one chair, and a professor can only be the chair of one department. This relationship is represented by putting the Faculty table's primary key (facultyID) into the table for Department as a foreign key.

• 1 - M Binary Relationships:

- The **Teaches** relationship is a 1 M binary relationship since a professor can teach multiple courses, but a course can only have one professor teaching it. This relationship is represented by putting the primary key of **Faculty** (**facultyID**) into the **Course** table as a foreign key.
- The **In** relationship is a 1 M binary relationship since a course can only take place in one room, but a room can have multiple courses take place in it. This relationship is represented by putting the primary key of **Classroom** (**roomNo**) into the **Course** table as a foreign key.
- The Offers relationship is a 1 M binary relationship since a department offers many different courses, but each course belongs to only one department. This relationship is represented by putting the primary key of Department (deptName) into the Course table as a foreign key.
- The hasMajor relationship is a 1 M binary relationship since a student can only declare one major, but a department has many students taking their program. This relationship is represented by putting the primary key of Department (deptName) into the Student table as a foreign key.
- The belongsTo relationship is a 1 M binary relationship since a faculty member belongs to only one department, but a department has many faculty members employed. This relationship is represented by putting the primary key of Department (deptName) into the Faculty table as a foreign key.
- The receivesNotification relationship is a 1 M binary relationship since a course can have multiple notifications, but a notification is only for at most one class. This relationship is represented by putting the primary key of Course (courseID) into the Notifications table as a foreign key.

- The isAvailable relationship is a 1 M binary relationship since a course can only be available in one term (if a course like CSCI 275 is offered in multiple terms / years, it needs to be in the course table multiple times), but a term can have many courses available in it. This relationship is represented by putting the primary keys of Term (term, year) into the Course table as a foreign key.
- The Announces relationship is a 1 M binary relationship since a a notification can only have one sender (Admin or Faculty), but a sender (Admin or Faculty) can send multiple notifications. This relationship is represented by putting the primary keys of Faculty and Admin (facultyID, adminID) into the Notifications table as a foreign key.

• M - N Binary Relationships:

- The Enrolls relationship is an M N binary relationship since a student can enroll in many courses, and a course has many students enroll in it. This is represented by creating a new table Enrollments with the primary keys of the Student and Course tables (studentID, and courseID) as attributes. This table also has two addition attributes, the grade and status. The grade attribute keeps track of a students grade in a particular course. The status attribute is one of the following: ("In Progress", "Passed", "Failed", "Dropped", or "Completed"). Completed is used when a student audits a course, or if the course does not have a grade.
- The **During** relationship is an M N binary relationship since a course can happen in multiple time blocks, and a time block can have many courses occurring during it. This is represented by creating a new table **Courseblock** with the primary keys of the **Course** and **Timeblock** tables (**courseID**, **timeblockID**) as attributes.
- The ManageCourse relationship is an M N binary relationship since an admin can manage multiple courses, and a course can be managed by many admins. This is represented by creating a new table CourseManagement with the primary keys of the Admin and Course tables (adminID, courseID) as attributes. This table has two additional attributes, the action, and date. The action attribute tracks what the admin did, for example, adding a course, updating a course, or deleting a course. The date attribute tracks when the action was done. The date attribute is also a part of the primary key along with the adminID and courseID attributes.
- The ManagesStudent relationship is an M N binary relationship since an admin can manage multiple students, and a student can be managed by many admins. This is represented by creating a new table StudentManagement with the primary keys of the Admin and Student tables (adminID, studentID) as attributes. This table has two additional attributes, the action, and date. The action attribute tracks what the admin did, for example, putting a student into a course, taking a student out of a course, or changing a students grade. The date attribute tracks when the action was done. The date attribute is also a part of the primary key along with the adminID and studentID attributes.

Tables

After mapping the relationships from the EER diagram to the relational model, we are left with the following set of tables:

- Admin(adminID, firstName, middleName, lastName, personalEmail, universityEmail, password)
 - The primary key is adminID.
- **Student**(<u>studentID</u>, firstName, middleName, lastName, personalEmail, universityEmail, password, *major*)
 - The primary key is <u>studentID</u>.
 - The foreign key is *major* which references **Department**(deptName).

- Faculty(facultyID, firstName, middleName, lastName, personalEmail, universityEmail, password, department)
 - The primary key is facultyID.
 - The foreign key is *department* which references **Department**(deptName).
- Course(courseID, section, title, credits, capacity, syllabus, info, professor, classroom, department, term, year)
 - The primary key is <u>courseID</u>.
 - The first foreign key is *professor* which references **Faculty**(facultyID).
 - The second foreign key is *classroom* which references **Classroom**(<u>roomNo</u>).
 - The third foreign key is *department* which references **Department**(deptName).
 - The last foreign key is made up of term and year which references Term(term, year).
- **Department**(deptName, email, chair)
 - The primary is deptName.
 - The foreign key is *chair* which references **Faculty**(facultyID).
- Timeblock(timeblockID, day, startTime, endTime)
 - The primary key is timeblockID.
- Classroom(<u>roomNo</u>, location)
 - The primary key is roomNo.
- $\bullet \ \mathbf{Term}(\underline{\mathsf{term}},\, \mathsf{year},\, \mathsf{registrationDeadline},\, \mathsf{dropDeadline})$
 - The primary key is made up of the two attributes <u>term</u> and year.
- Notifications(<u>notificationID</u>, title, content, date, *courseID*, *facultyID*, *adminID*)
 - The primary key is <u>notificationID</u>
 - The first foreign key is *courseID* which references **Course**(<u>courseID</u>).
 - The other foreign keys are *facultyID* and *adminID* which reference **Faculty**(<u>facultyID</u>) and **Admin**(<u>adminID</u>) respectively.
- Prerequisites(<u>course</u>, prerequisite)
 - The primary key is made up of the two attributes <u>course</u> and <u>prerequisite</u>.
 - The first foreign key is *course* which references **Course**(courseID).
 - The second foreign key is *prerequisite* which also references Course(courseID).
- Enrollments(<u>studentID</u>, <u>courseID</u>, grade, status)
 - The primary key is made up of the two attributes *studentID* and *courseID*.
 - The first foreign key is *studentID* which references **Student**(studentID).
 - The second foreign key is *courseID* which references **Course**(courseID).
- Courseblock(<u>courseID</u>, <u>timeblockID</u>)
 - The primary key is made up of the two attributes courseID and timeblockID.
 - The first foreign key is *courseID* which references **Course**(courseID).
 - The second foreign key is *timeblockID* which references **Timeblock**(<u>timeblockID</u>).

- CourseManagement(<u>adminID</u>, <u>courseID</u>, action, date)
 - The primary key is made up of the two attributes <u>adminID</u> and <u>courseID</u>.
 - The first foreign key is *adminID* which references **Admin**(<u>adminID</u>).
 - The second foreign key is *courseID* which references **Course**(<u>courseID</u>).
- StudentManagement(<u>adminID</u>, <u>studentID</u>, action, date)
 - The primary key is made up of the two attributes <u>adminID</u> and <u>studentID</u>
 - The first foreign key is *adminID* which references **Admin**(<u>adminID</u>).
 - The second foreign key is *studentID* which references **Student**(<u>studentID</u>).

SQL Statements

Creating The Tables

• Admin

```
CREATE TABLE IF NOT EXISTS admin (
    admin_id INTEGER PRIMARY KEY,
    first_name TEXT NOT NULL,
    middle_name TEXT,
    last_name TEXT NOT NULL,
    admin_email TEXT UNIQUE NOT NULL,
    personal_email TEXT UNIQUE NOT NULL,
    password TEXT NOT NULL
);
```

• Student

```
CREATE TABLE IF NOT EXISTS student (

student_id INTEGER PRIMARY KEY,

first_name TEXT NOT NULL,

middle_name TEXT,

last_name TEXT NOT NULL,

student_email TEXT UNIQUE NOT NULL,

personal_email TEXT UNIQUE NOT NULL,

major TEXT,

password TEXT,

password TEXT NOT NULL,

FOREIGN KEY (major) REFERENCES department(department_name)

1);
```

• Faculty

```
CREATE TABLE IF NOT EXISTS faculty (
faculty_id INTEGER PRIMARY KEY,
first_name TEXT NOT NULL,
middle_name TEXT,
last_name TEXT NOT NULL,
faculty_email TEXT UNIQUE NOT NULL,
personal_email TEXT UNIQUE NOT NULL,
department TEXT NOT NULL,
password TEXT NOT NULL,
FOREIGN KEY (department) REFERENCES department(department_name)
);
```

• Course

```
CREATE TABLE IF NOT EXISTS course (
```

```
course_id INTEGER PRIMARY KEY,
       section TEXT NOT NULL.
       title TEXT NOT NULL,
       credits INTEGER NOT NULL,
       capacity INTEGER DEFAULT 30,
       syllabus TEXT NOT NULL,
       info TEXT NOT NULL,
       instructor_id INTEGER NOT NULL,
       room TEXT NULL,
       department TEXT NOT NULL,
       term TEXT NOT NULL,
       year INTEGER NOT NULL,
       FOREIGN KEY (instructor_id) REFERENCES faculty(faculty_id),
14
       FOREIGN KEY (term, year) REFERENCES term(term, year),
       FOREIGN KEY (department) REFERENCES department(department_name),
       FOREIGN KEY (room) REFERENCES classroom(room_number)
17
   );
```

• Department

```
CREATE TABLE IF NOT EXISTS department (

department_name TEXT PRIMARY KEY,

department_email TEXT UNIQUE NOT NULL,

department_chair INTEGER NOT NULL,

FOREIGN KEY (department_chair) REFERENCES faculty(faculty_id)

);
```

• Timeblock

```
CREATE TABLE IF NOT EXISTS timeblock (

timeblock_id TEXT PRIMARY KEY,

day TEXT NOT NULL,

start_time TIME NOT NULL,

end_time TIME NOT NULL

);
```

• Classroom

```
CREATE TABLE IF NOT EXISTS classroom (
room_number TEXT PRIMARY KEY,
building TEXT NOT NULL
);
```

• Term

```
CREATE TABLE IF NOT EXISTS term (
term TEXT NOT NULL,
year INTEGER NOT NULL,
registration_deadline DATE NOT NULL,
drop_deadline DATE NOT NULL,
PRIMARY KEY (term, year),
CHECK (term IN ('Fall', 'Winter', 'Spring', 'Summer'))
);
```

• Notifications

```
CREATE TABLE IF NOT EXISTS notifications (
    notification_id INTEGER PRIMARY KEY,
    title TEXT NOT NULL,
    content TEXT NOT NULL,
    date DATE NOT NULL,
    courseID INTEGER,
    facultyID INTEGER,
    adminID INTEGER,
    FOREIGN KEY (courseID) REFERENCES course(course_id),
    FOREIGN KEY (facultyID) REFERENCES faculty(faculty_id),
    FOREIGN KEY (adminID) REFERENCES admin(admin_id)

12 );
```

• Prerequisites

```
CREATE TABLE IF NOT EXISTS prerequisites (
course_id INTEGER,
prereq_id INTEGER,

PRIMARY KEY (course_id, prereq_id),
FOREIGN KEY (course_id) REFERENCES course(course_id),
FOREIGN KEY (prereq_id) REFERENCES course(course_id)

7 );
```

• Enrollments

```
CREATE TABLE IF NOT EXISTS enrollments (
       student_id INTEGER,
2
       course_id INTEGER,
       grade INTEGER DEFAULT NULL,
       status TEXT DEFAULT 'In Progress',
       CHECK (status IN (
           'In Progress',
           'Passed',
           'Failed',
9
           'Dropped'
           'Completed'
       )),
       PRIMARY KEY (student_id, course_id),
       FOREIGN KEY (student_id) REFERENCES student(student_id),
14
       FOREIGN KEY (course_id) REFERENCES course(course_id)
   );
```

• Courseblock

```
CREATE TABLE IF NOT EXISTS courseblock (
course_id INTEGER,
timeblock_id INTEGER,
PRIMARY KEY (course_id, timeblock_id),
FOREIGN KEY (course_id) REFERENCES course(course_id),
FOREIGN KEY (timeblock_id) REFERENCES timeblock(timeblock_id)
);
```

• CourseManagement

```
CREATE TABLE IF NOT EXISTS course_management (
admin_id INTEGER NOT NULL,
```

```
course_id INTEGER NOT NULL,

action TEXT,

date DATETIME NOT NULL,

PRIMARY KEY (admin_id, course_id, date),

FOREIGN KEY (admin_id) REFERENCES admin(admin_id),

FOREIGN KEY (course_id) REFERENCES course(course_id)

);
```

• StudentManagement

```
CREATE TABLE IF NOT EXISTS student_management (
    admin_id INTEGER NOT NULL,
    student_id INTEGER NOT NULL,
    action TEXT,
    date DATETIME NOT NULL,
    PRIMARY KEY (admin_id, student_id, date),
    FOREIGN KEY (admin_id) REFERENCES admin(admin_id),
    FOREIGN KEY (student_id) REFERENCES student(student_id)
);
```

Important Note

We use bind variables in the following SQL statements to take the place of the information that will change each time the queries are run, for example student_id, course_id, etc. This is why some variables have a ":" in front of them.

Student Functionalities

• Register for courses based on prerequisites and availability.

```
INSERT INTO enrollments (student_id, course_id, status)
   SELECT :student_id, :course_id, 'In Progress'
   WHERE NOT EXISTS (
       -- check for missing prerequisites
       SELECT 1
       FROM prerequisites p
       LEFT JOIN enrollments e ON p.prereq_id = e.course_id
          AND e.student_id = :student_id
          AND e.status = 'Passed'
       WHERE p.course_id = :course_id
       AND e.course_id IS NULL -- if any prerequisite is missing, this returns rows
12
   ) AND NOT EXISTS (
       -- check for time conflicts with other "In Progress" courses
       SELECT 1
14
       FROM enrollments e
       JOIN courseblock cb1 ON e.course_id = cb1.course_id
       JOIN timeblock tb1 ON cb1.timeblock_id = tb1.timeblock_id
       JOIN courseblock cb2 ON cb2.course_id = :course_id
       JOIN timeblock tb2 ON cb2.timeblock_id = tb2.timeblock_id
       WHERE e.student_id = :student_id
20
       AND e.status = 'In Progress'
21
       AND tb1.day = tb2.day -- must be on the same day
       AND tb1.start_time < tb2.end_time -- ensures Course A starts before Course B ends
23
       AND tb1.end_time > tb2.start_time -- ensures Course A ends after Course B starts
24
   ) AND (
       -- ensure student has not registered for more than 10 courses in Fall + Winter
```

```
SELECT COUNT(*) FROM enrollments e
27
       JOIN course c ON e.course id = c.course id
28
       WHERE e.student_id = :student_id
29
       AND c.term IN ('Fall', 'Winter')
30
       AND e.status = 'In Progress'
   ) < 10 AND (
32
       -- ensure the current date is before the registration deadline
33
       SELECT COUNT(*) FROM term t
34
       JOIN course c ON c.term = t.term
35
       WHERE c.course_id = :course_id
36
       AND t.year = :year
       AND t.registration_deadline >= CURRENT_DATE
38
   ) > 0 AND (
39
       -- ensure the course is not full (current enrollment < capacity)
40
       SELECT COUNT(*) FROM enrollments
41
       WHERE course_id = :course_id
           AND status = 'In Progress'
43
   ) < (
44
       SELECT capacity FROM course WHERE course_id = :course_id
45
   );
46
```

- This query is used to register a student for a course. Before adding the student to the enrollments, it checks for any missing prerequisites, time conflicts with "in progress" courses, that they aren't in more than 10 courses, the registration deadline hasn't passed, and that the course isn't full. If all of these criteria are met, a new row is inserted into the enrollments table.
- Note: If you are testing this, it may be helpful to comment out line 38, so you don't run into trouble with the registration deadlines.
- Drop registered courses within the allowed add/drop period.

```
UPDATE enrollments
SET status = 'Dropped'
WHERE student_id = :student_id
AND course_id = :course_id
AND status = 'In Progress'
AND (
-- ensure the current date is before the drop deadline
SELECT COUNT(*) FROM term t
JOIN course c ON c.term = t.term
WHERE c.course_id = :course_id
AND t.year = :year
AND t.drop_deadline >= CURRENT_DATE

13 ) > 0;
```

- This query is used to drop courses. It checks that the student is enrolled in the course, that the course is in progress, and that the drop deadline hasn't passed. If all of these criteria are met, the status of the course is changed to "Dropped".
- View personal course schedules, including timings, instructors, and locations.

```
SELECT
c.course_id,
c.section,
c.title,
c.credits,
c.room,
c.term,
```

```
c.vear,
   c.instructor id.
   f.first_name || ' ' || f.last_name AS instructor_name,
10
  tb.start_time,
  tb.end_time,
  tb.day
13
  FROM enrollments e
14
   JOIN course c ON e.course_id = c.course_id
15
   LEFT JOIN courseblock cb ON c.course_id = cb.course_id
16
   LEFT JOIN timeblock tb ON cb.timeblock_id = tb.timeblock_id
   LEFT JOIN faculty f ON c.instructor_id = f.faculty_id
   WHERE e.student_id = :student_id
   AND e.status = 'In Progress'
   ORDER BY c.course_id, tb.timeblock_id;
```

- This query returns information about the courses a student is currently enrolled in, including the days and times their courses take place in.
- Check course prerequisites and availability before registering.

```
SELECT
   c.course_id,
   c.title,
  c.credits,
  c.department,
  c.room,
6
   tb.start_time,
   tb.end_time,
   tb.day,
9
   p.prereq_id AS prereq_id,
       WHEN p.prereq_id IS NULL THEN 'Yes' -- no prerequisites required
       WHEN NOT EXISTS (
          SELECT 1
14
          FROM prerequisites pr
          LEFT JOIN enrollments e ON pr.prereq_id = e.course_id
17
              AND e.student_id = :student_id
              AND e.status = 'Passed'
18
          WHERE pr.course_id = c.course_id
19
          AND e.course_id IS NULL -- if any prerequisite is missing, return 'No'
20
       ) THEN 'Yes'
21
       ELSE 'No'
   END AS has_prerequisites
23
   FROM course c
   LEFT JOIN courseblock cb ON c.course_id = cb.course_id
25
   LEFT JOIN timeblock tb ON cb.timeblock_id = tb.timeblock_id
   LEFT JOIN prerequisites p ON c.course_id = p.course_id
   ORDER BY c.course_id, tb.timeblock_id, p.prereq_id;
```

- This query returns a list of courses available for registration, including their timeblocks and prerequisites. This statement also includes a column called "has_prerequisites" which is either "Yes" or "No" depending on whether the student has the relevant prerequisites for the particular course.
- Receive notifications for important updates like registration deadlines.

```
CREATE TRIGGER notify_students_on_deadline_change
```

```
AFTER UPDATE ON term

FOR EACH ROW

WHEN OLD.registration_deadline IS NOT NEW.registration_deadline

BEGIN

INSERT INTO notifications (title, content, date)

VALUES (

Registration Deadline Update',

Registration deadline for term ' || NEW.term || ' ' || NEW.year ||

' has been updated to ' || NEW.registration_deadline || '.',

DATETIME('now')

);

END;
```

- This statement creates a trigger, so that anytime the registration date is changed for a term, a notification / announcement will be made to notify all students.

```
CREATE TRIGGER notify_students_on_syllabus_update

AFTER UPDATE ON course

FOR EACH ROW

WHEN OLD.syllabus IS NOT NEW.syllabus

BEGIN

INSERT INTO notifications (title, content, date, courseID)

VALUES (

'Syllabus Update',

'The syllabus for course' || NEW.course_id || ' has been updated.',

DATETIME('now'),

NEW.course_id

);

END;
```

This statement creates a trigger, so that anytime the syllabus is changed for a course, a notification
 / announcement will be made to notify all the students in that course.

```
SELECT title, content, date
FROM notifications
WHERE courseID IS NULL
OR courseID IN (
SELECT course_id
FROM enrollments
WHERE student_id = :student_id
AND status = 'In Progress'
);
```

- This query will return all the notifications / announcements that are for a student.

Note: If the "courseID" is *NULL*, the announcement is meant for all the students, but if the courseID is specified, it is only meant for students in that course.

Faculty Functionalities

• View lists of students enrolled in their courses.

```
SELECT
s.student_id,
s.first_name,
```

```
s.last_name,
s.student_email,
c.course_id,
c.title
FROM student s
JOIN enrollments e ON s.student_id = e.student_id
JOIN course c ON e.course_id = c.course_id
WHERE c.instructor_id = :instructor_id
AND e.status = 'In Progress';
```

- This returns all the students that are enrolled in any course taught by a specific professor, as long as the enrollment is "In Progress".

```
SELECT
s.student_id,
s.first_name,
s.last_name,
s.student_email,
c.course_id,
c.title
FROM student s
JOIN enrollments e on s.student_id = e.student_id
JOIN course c on e.course_id = c.course_id
WHERE c.instructor_id = :instructor_id
AND e.course_id = :course_id
AND e.status = "In Progress";
```

- This query returns all the students that are enrolled in a specific course taught by a specific professor, as long as the enrollment is "In Progress".
- Update course details such as syllabus, class schedule, and grading criteria.

```
UPDATE course SET syllabus = :new_syllabus WHERE course_id = :course_id;
```

- This statement updates a specific course's syllabus (This would work with the TRIGGER statement above to notify students affected).

```
UPDATE course SET term = :new_term, year = :new_year WHERE course_id = :course_id;
```

- This statement updates the term and year for a specific course.

```
UPDATE courseblock

SET timeblock_id = (

SELECT timeblock_id FROM timeblock

WHERE start_time = :new_start_time AND end_time = :new_end_time AND day = :new_day

WHERE course_id = (SELECT course_id FROM course WHERE course_id = :course_id);
```

- This statement changes the time that a course takes place during.
- Post announcements for registered students.

```
INSERT INTO notifications (title, content, date, courseID, facultyID) VALUES
(:announcement_title, :announcement_content, DATETIME('now'), :course_id, :faculty_id)
```

- This query is used when a faculty member posts an announcement for students in a specific course.

Admin Functionalities

• Add, update, or delete courses and their details (e.g., title, prerequisites, and capacity).

```
BEGIN TRANSACTION;
   INSERT INTO course (course_id, section, title, credits, capacity, syllabus, info,
       instructor_id, room, department, term, year) VALUES
   (:course_id, :section, :title, :credits, :capacity, :syllabus, :info, :instructor_id,
       :room, :department, :term, :year);
   INSERT INTO prerequisites (course_id, prereq_id) VALUES
6
   -- repeat this for as many prerequisites as needed
   (:course_id, :prereq_id);
   INSERT INTO courseblock (course_id, timeblock_id) VALUES
   (:course_id, :timeblock_id);
11
   INSERT INTO course_management (admin_id, course_id, action, date)
   VALUES (:admin_id, :course_id, "create new class", DATETIME('now'));
14
   COMMIT;
```

- This statement creates a new class, adds it's prerequisites, assigns it a time, and records the action in the course_management log table.

```
BEGIN TRANSACTION;
   PRAGMA foreign_keys = OFF;
   DELETE FROM prerequisites WHERE course_id = :course_id;
   DELETE FROM prerequisites WHERE prereq_id = :course_id;
   DELETE FROM courseblock WHERE course_id = :course_id;
   DELETE FROM notifications WHERE courseID = :course_id;
12
   DELETE FROM enrollments WHERE course_id = :course_id;
14
   UPDATE course_management SET course_id = NULL WHERE course_id = :course_id;
   DELETE FROM course WHERE course_id = :course_id;
17
   INSERT INTO course_management (admin_id, course_id, action, date)
19
   VALUES (:admin_id, NULL, "delete class", DATETIME('now'));
20
21
   PRAGMA foreign_keys = ON;
23
   COMMIT;
```

This statement deletes a class from its database, and any references to it in the other tables with course_id as a foreign key. The statement PRAGMA foreign_keys = OFF; and PRAGMA foreign_keys = ON; temporarily disable the foreign key validation so we can remove all the data before enabling the validation. In the course_management table, any references to the deleted course will have their course_id field updated to a NULL value.

```
BEGIN TRANSACTION;
   UPDATE course SET
3
   section = :new_section,
   title = :new_title,
   credits = :new_credits,
6
   capacity = :new_capacity,
   syllabus = :new_syllabus,
   info = :new_info,
9
   instructor_id = :new_instructor_id,
10
   room = :new_room,
11
   department = :new_department,
   term = :new_term,
13
   year = :new_year
14
   WHERE course_id = :course_id;
15
16
   INSERT INTO course_management (admin_id, course_id, action, date)
17
   VALUES (:admin_id, :course_id, "update class", DATETIME('now'));
   COMMIT;
```

- This statement allows an admin to update any details of a course (expect for it's courseID)

```
BEGIN TRANSACTION;

-- use this if you want to add a prerequisite
INSERT INTO prerequisites (course_id, prerequisite_id)

VALUES (:course_id, :prerequisite_id);

-- use this if you want to remove a prerequisite

DELETE FROM prerequisites WHERE course_id = :course_id AND prerequisite_id = :prerequisite_id;

INSERT INTO course_management (admin_id, course_id, action, date)

VALUES (:admin_id, :course_id, "update course prerequisites", DATETIME('now'));

COMMIT;
```

- This statement allows an admin to add and remove prerequisites for a course.
- Manage student records, including registration status and academic history.

```
BEGIN TRANSACTION;

DELETE FROM enrollments WHERE student_id = :student_id
AND course_id = :course_id;

INSERT INTO student_management (admin_id, student_id, action, date)
VALUES (:admin_id, :student_id, "remove student from class", DATETIME('now'));

COMMIT;
COMMIT;
```

- This statement forces a student out of a course and records the action (and the admin who did it) in the student_management table.

```
BEGIN TRANSACTION;

INSERT INTO enrollments (student_id, course_id) VALUES (:student_id, :course_id);

INSERT INTO student_management (admin_id, student_id, action, date)
VALUES (:admin_id, :student_id, "put student in class", DATETIME('now'));

COMMIT;
```

This statement enrolls a student in a course and records the action (and the admin who did it) in the student_management table. This ignores any missing prerequisites or time conflicts. If you want to check for these, use the query in the student section.

```
BEGIN TRANSACTION;

UPDATE enrollments SET grade = :grade
WHERE student_id = :student_id
AND course_id = :course_id;

INSERT INTO student_management (admin_id, student_id, action, date)
VALUES (:admin_id, :student_id, "update grade", DATETIME('now'));

COMMIT;
```

- This statement updates a student's grade in a course and records the action (and the admin who did it) in the student_management table.
- Assign faculty members to courses and update class schedules.

```
UPDATE course set instructor_id = :instructor_id
WHERE course_id = :course_id;
```

- This query is used to assign a faculty member to teach a course.
- Generate reports on course enrollments and student performance.

```
SELECT
c.course_id,
COUNT(*) AS studentCount,
AVG(e.grade) AS average_grade
FROM course c JOIN enrollments e ON c.course_id = e.course_id
GROUP BY c.course_id;
```

 This query returns the number of students enrolled in each course, and the average grade in that course.

```
SELECT
s.student_id,
AVG(e.grade) AS average_grade
FROM student s JOIN enrollments e ON s.student_id = e.student_id
GROUP BY s.student_id;
```

- This query returns the average grade for each student in the university.

SQL Statements for Testing

The last part of this report is a list of SQL statements that was used to generate the tables and sample data that was used to test all the statements in the report, including the section below.

Insert a New Course

For this test, we will create a new course called "Advanced Data Structures", this will be a 3 credit course, with a capacity of 20 students. The instructor will be Portia Geary (faculty_id = 302). It will take place in Fall of 2021 in the "friday_afternoon" and "monday_morning" timeblock. The course will take place in the room "CS102" in the Computer Science building, and the course is offered by the Computer Science department. Finally, the course will have "Computer Science II" (cours_id = 408) and "Data Structures" (course_id = 409) as prerequisites. All of this will be done by the admin with the admin_id of 102. The statement for this is:

```
BEGIN TRANSACTION;
   INSERT INTO course (course_id, section, title, credits, capacity, syllabus, info, instructor_id,
       room, department, term, year) VALUES
   (412, "11", "Advanced Data Structures", "3", 20, "Midterm : 20%, Assignments / Labs : 30%, Final
       Exam : 50%", "Learn about Advanced Data Structures", 302, "CS102", "Computer Science",
       "Fall", 2021);
   INSERT INTO prerequisites (course_id, prereq_id) VALUES
   (412, 408),
   (412, 409);
   INSERT INTO courseblock (course_id, timeblock_id) VALUES
   (412, "friday_afternoon"),
   (412, "monday_morning");
12
13
   INSERT INTO course_management (admin_id, course_id, action, date)
14
   VALUES (102, 412, "create new class", DATETIME('now'));
   COMMIT;
```

The following is a list of all the entries added to the affected tables: (To reiterate, all the data is coming from the SQL statements at the end of the report.)

• course

$course_id$	section	title	credits	capacity	syllabus	info	instructor_id	room	department	term	year
					Midterm : 20%	Learn about		CS102	Computer Science		
412	11	Advanced Data	3	20	Assignments / Labs : 30%	Advanced Data	302			Fall	2021
		Structures			Final Exam : 50%	Structures					

• prerequisites

$course_id$	$\mathbf{prereq_id}$
412	408
412	409

courseblock

course_id	${\it timeblock_id}$
412	friday_afternoon
412	monday_morning

• course_management

admin_id	${f course_id}$	action	date			
102	412	create new class	2021-03-13 16:17:58			

Register a Student for a Course

For this we will register the student with the student_id of 203 for the course with the course_id of 412 (The course we just created). This will work successfully as long as we are before the registration deadline, since the student does have all of the prerequisites, they aren't in too many courses, the course isn't full, and there won't be any time conflicts. The statement to do this (and check that these criteria are met) is:

```
INSERT INTO enrollments (student_id, course_id, status)
   SELECT 203, 412, 'In Progress'
2
   WHERE NOT EXISTS (
       -- check for missing prerequisites
       SELECT 1
       FROM prerequisites p
6
       LEFT JOIN enrollments e ON p.prereq_id = e.course_id
          AND e.student_id = 203
          AND e.status = 'Passed'
       WHERE p.course_id = 412
       AND e.course_id IS NULL -- if any prerequisite is missing, this returns rows
   ) AND NOT EXISTS (
12
       -- check for time conflicts with other "In Progress" courses
13
       SELECT 1
14
       FROM enrollments e
       JOIN courseblock cb1 ON e.course_id = cb1.course_id
       JOIN timeblock tb1 ON cb1.timeblock_id = tb1.timeblock_id
       JOIN courseblock cb2 ON cb2.course_id = 412
       JOIN timeblock tb2 ON cb2.timeblock_id = tb2.timeblock_id
19
       WHERE e.student_id = 203
20
       AND e.status = 'In Progress'
21
       AND tb1.day = tb2.day -- must be on the same day
       AND tb1.start_time < tb2.end_time -- ensures Course A starts before Course B ends
23
       AND tb1.end_time > tb2.start_time -- ensures Course A ends after Course B starts
24
25
   ) AND (
       -- ensure student has not registered for more than 10 courses in Fall + Winter
26
       SELECT COUNT(*) FROM enrollments e
27
       JOIN course c ON e.course_id = c.course_id
       WHERE e.student_id = 203
       AND c.term IN ('Fall', 'Winter')
       AND e.status = 'In Progress'
   ) < 10 AND (
       -- ensure the current date is before the registration deadline
       SELECT COUNT(*) FROM term t
34
```

```
JOIN course c ON c.term = t.term
35
       WHERE c.course id = 412
36
       AND t.year = 2021
37
       AND t.registration_deadline >= CURRENT_DATE
38
   ) > 0 \text{ AND } (
       -- ensure the course is not full (current enrollment < capacity)
40
       SELECT COUNT(*) FROM enrollments
41
       WHERE course_id = 412
42
           AND status = 'In Progress'
43
   ) < (
44
       SELECT capacity FROM course WHERE course_id = 412
45
   );
```

• Note: If you are testing this, it may be helpful to comment out line 38, so you don't run into trouble with the registration deadlines.

The following is a list of all the entries added to the affected tables:

• enrollments

$\mathbf{student}_{-\mathbf{id}}$	$\operatorname{course_id}$	grade	Status
203	412		In Progress

Retrieve a Student's Course Schedule

For this test we will retrieve the schedule for the student who has the student_id of 203. The statement to do this is:

```
SELECT
   c.course_id,
   c.section,
   c.title,
   c.credits,
   c.room,
   c.term,
   c.year,
   c.instructor_id,
   f.first_name || ' ' || f.last_name AS instructor_name,
   tb.start_time,
   tb.end_time,
12
   tb.day
13
   FROM enrollments e
   JOIN course c ON e.course_id = c.course_id
   LEFT JOIN courseblock cb ON c.course_id = cb.course_id
   LEFT JOIN timeblock tb ON cb.timeblock_id = tb.timeblock_id
17
   LEFT JOIN faculty f ON c.instructor_id = f.faculty_id
   WHERE e.student_id = 203
   AND e.status = 'In Progress'
   ORDER BY c.course_id, tb.timeblock_id;
```

This statement does not update or change any values in the table, but instead returns a new table consisting of the schedule. The result is:

• output

course_id	section	title	credits	room	term	year	instructor_id	instructor_name	start_time	end_time	day
412	11	Advanced Data Structures	3	CS102	Fall	2021	302	Portia Geary	13:00:00	16:00:00	Friday
412	11	Advanced Data Structures	3	CS102	Fall	2021	302	Portia Geary	08:00:00	11:00:00	Monday

Update Course Capacity After Registration

For this test the admin with the admin_id of 102 will update the capacity of the course with the course_id of 412 to 25. The statement to do this is:

```
BEGIN TRANSACTION;

UPDATE course SET
capacity = 25
WHERE course_id = 412;

INSERT INTO course_management (admin_id, course_id, action, date)
VALUES (102, 412, "update class", DATETIME('now'));

COMMIT;
```

The following is a list of all the entries / tables that were affected by this statement:

• course

course_id	section	title	credits	capacity	syllabus	info	instructor_id	room	department	term	year
					Midterm : 20%	Learn about					
412	11	Advanced Data	3	25	Assignments / Labs : 30%	Advanced Data	302	CS102	Computer Science	Fall	2021
		Structures			Final Exam : 50%	Structures					i i

• course_management

admin_id	$course_id$	action	date			
102	412	update class	2025-03-13 17:23:51			

List Courses with Prerequisites

To list any course that has a prerequisite we would run the query:

```
SELECT
c.title AS course_name,
c.course_id,
pr.title AS prereq_name,
p.prereq_id
FROM
course c
JOIN
prerequisites p ON c.course_id = p.course_id
JOIN
course pr ON p.prereq_id = pr.course_id;
```

The output of this query is:

• output

course_name	${ m course_id}$	prereq_name	$prereq_id$
Calculus II	402	Calculus I	401
Calculus III	403	Calculus II	402
Linear Algebra	405	Calculus II	402
Linear Algebra	405	Discrete Mathematics	404
Differential Equations	406	Calculus III	403
Computer Science II	408	Computer Science I	407
Data Structures	409	Computer Science I	407
Biology II	411	Biology I	410
Advanced Data Structures	412	Computer Science II	408
Advanced Data Structures	412	Data Structures	409

The query to list all of the courses a student has the prerequisites for (and hasn't already passed) would be (I use the student with the student_id of 201 in this example):

```
SELECT
   c.course_id,
   c.title,
   c.credits,
   c.department,
   c.room,
   tb.start_time,
   tb.end_time,
   tb.day,
   p.prereq_id AS prereq_id,
       WHEN p.prereq_id IS NULL THEN 'Yes' -- no prerequisites required
       WHEN NOT EXISTS (
13
           SELECT 1
14
           FROM prerequisites pr
           LEFT JOIN enrollments e ON pr.prereq_id = e.course_id
16
              AND e.student_id = 201
17
              AND e.status = 'Passed'
18
           WHERE pr.course_id = c.course_id
19
           AND e.course_id IS NULL -- if any prerequisite is missing, return 'No'
20
       ) THEN 'Yes'
21
       ELSE 'No'
   END AS has_prerequisites
   FROM
24
   course c
25
   LEFT JOIN
26
   courseblock cb ON c.course_id = cb.course_id
27
   LEFT JOIN
   timeblock tb ON cb.timeblock_id = tb.timeblock_id
   LEFT JOIN
31
   prerequisites p ON c.course_id = p.course_id
32
   LEFT JOIN
   enrollments e ON c.course_id = e.course_id
   AND e.student_id = 201
   AND e.status = 'Passed'
   WHERE
37
   e.course_id IS NULL
   AND has_prerequisites = 'Yes'
38
   ORDER BY
39
   c.course_id, tb.timeblock_id, p.prereq_id;
```

• output

course_id	title	credits	department	room	start_time	end_time	day	prereq_id	has_prerequisites
406	Differential Equations	4	Math	M101	08:00:00	11:00:00	Wednesday	403	Yes
407	Computer Science I	4	Computer Science	CS102	08:00:00	11:00:00	Thursday		Yes
410	Biology I	4	Biology	B103	13:00:00	16:00:00	Monday		Yes

Login System

The SQL to deal with a faculty, admin or student logging in is:

```
SELECT
CASE
WHEN :entered_password = password THEN person_type || 'Login Successful'
ELSE 'Incorrect Password or ID'
```

```
END AS password_match
FROM (

SELECT "Student" AS person_type, student_id AS person_id, password FROM student
UNION ALL
SELECT "Faculty" AS person_type, faculty_id AS person_id, password FROM faculty
UNION ALL
SELECT "Admin" AS person_type, admin_id AS person_id, password FROM admin

AS people
WHERE person_id = :person_id;
```

To use this, you would replace **:person_id** with either a **student_id**, **faculty_id** or an **admin_id**. Then, replace **:entered_password** with the password for the person. If the ID and password are correct it will return "Login Successful", otherwise it will say there was a mistake. This is where our assumption that no subset of the **Person** entity can have the same ID, since it would cause issues with this system (if they also had the same password).

SQL Sample Data

This is the data that was used to test all of the above statements, including the "SQL Statements for Testing"

```
CREATE TABLE IF NOT EXISTS admin (
       admin_id INTEGER PRIMARY KEY,
       first_name TEXT NOT NULL,
       middle_name TEXT,
       last_name TEXT NOT NULL,
       admin_email TEXT UNIQUE NOT NULL,
       personal_email TEXT UNIQUE NOT NULL,
       password TEXT NOT NULL
   );
   CREATE TABLE IF NOT EXISTS student (
       student_id INTEGER PRIMARY KEY,
       first_name TEXT NOT NULL,
13
       middle_name TEXT,
14
       last_name TEXT NOT NULL,
       student_email TEXT UNIQUE NOT NULL,
       personal_email TEXT UNIQUE NOT NULL,
       major TEXT,
19
       password TEXT NOT NULL,
20
       FOREIGN KEY (major) REFERENCES department(department_name)
   );
22
   CREATE TABLE IF NOT EXISTS faculty (
       faculty_id INTEGER PRIMARY KEY,
       first_name TEXT NOT NULL,
25
       middle_name TEXT,
       last_name TEXT NOT NULL,
       faculty_email TEXT UNIQUE NOT NULL,
       personal_email TEXT UNIQUE NOT NULL,
       department TEXT NOT NULL,
       password TEXT NOT NULL,
       FOREIGN KEY (department) REFERENCES department(department_name)
   );
33
34
   CREATE TABLE IF NOT EXISTS course (
       course_id INTEGER PRIMARY KEY,
       section TEXT NOT NULL,
       title TEXT NOT NULL,
       credits INTEGER NOT NULL,
39
       capacity INTEGER DEFAULT 30,
40
       syllabus TEXT NOT NULL,
41
       info TEXT NOT NULL,
42
       instructor_id INTEGER NOT NULL,
       room TEXT NULL,
```

```
department TEXT NOT NULL,
45
        term TEXT NOT NULL.
46
        year INTEGER NOT NULL,
47
        FOREIGN KEY (instructor_id) REFERENCES faculty(faculty_id),
        FOREIGN KEY (term, year) REFERENCES term(term, year),
        FOREIGN KEY (department) REFERENCES department(department_name),
        FOREIGN KEY (room) REFERENCES classroom(room_number)
    );
52
    CREATE TABLE IF NOT EXISTS department (
54
        department_name TEXT PRIMARY KEY,
55
        department_email TEXT UNIQUE NOT NULL,
        department_chair INTEGER NOT NULL,
57
        FOREIGN KEY (department_chair) REFERENCES faculty(faculty_id)
58
    );
59
60
    CREATE TABLE IF NOT EXISTS timeblock (
61
        timeblock_id TEXT PRIMARY KEY,
        day TEXT NOT NULL,
63
        start_time TIME NOT NULL,
64
        end_time TIME NOT NULL
65
    );
66
67
    CREATE TABLE IF NOT EXISTS classroom (
68
        room_number TEXT PRIMARY KEY,
69
        building TEXT NOT NULL
70
    );
71
72
    CREATE TABLE IF NOT EXISTS term (
        term TEXT NOT NULL,
74
        year INTEGER NOT NULL,
        registration_deadline DATE NOT NULL,
77
        drop_deadline DATE NOT NULL,
        PRIMARY KEY (term, year),
        CHECK (term IN ('Fall', 'Winter', 'Spring', 'Summer'))
79
    );
80
81
    CREATE TABLE IF NOT EXISTS notifications (
        notification_id INTEGER PRIMARY KEY,
83
        title TEXT NOT NULL,
84
        content TEXT NOT NULL,
85
        date DATE NOT NULL,
86
        courseID INTEGER,
87
        facultyID INTEGER,
        adminID INTEGER,
        FOREIGN KEY (courseID) REFERENCES course(course_id),
        FOREIGN KEY (facultyID) REFERENCES faculty(faculty_id),
91
        FOREIGN KEY (adminID) REFERENCES admin(admin_id)
92
    );
93
94
    CREATE TABLE IF NOT EXISTS prerequisites (
95
        course_id INTEGER,
96
        prereq_id INTEGER,
97
        PRIMARY KEY (course_id, prereq_id),
98
        FOREIGN KEY (course_id) REFERENCES course(course_id),
99
        FOREIGN KEY (prereq_id) REFERENCES course(course_id)
100
    );
101
    CREATE TABLE IF NOT EXISTS enrollments (
```

```
student_id INTEGER,
        course id INTEGER.
        grade INTEGER DEFAULT NULL,
106
        status TEXT DEFAULT 'In Progress',
107
        CHECK (status IN (
        'In Progress',
109
        'Passed',
        'Failed'.
        'Dropped',
112
        'Completed'
113
        )),
        PRIMARY KEY (student_id, course_id),
        FOREIGN KEY (student_id) REFERENCES student(student_id),
        FOREIGN KEY (course_id) REFERENCES course(course_id)
117
    );
118
119
    CREATE TABLE IF NOT EXISTS courseblock (
120
        course_id INTEGER,
        timeblock_id INTEGER,
       PRIMARY KEY (course_id, timeblock_id),
       FOREIGN KEY (course_id) REFERENCES course(course_id),
       FOREIGN KEY (timeblock_id) REFERENCES timeblock(timeblock_id)
125
    );
126
127
    CREATE TABLE IF NOT EXISTS course_management (
        admin_id INTEGER NOT NULL,
129
        course_id INTEGER,
130
        action TEXT,
        date DATETIME NOT NULL,
       PRIMARY KEY (admin_id, course_id, date),
       FOREIGN KEY (admin_id) REFERENCES admin(admin_id),
       FOREIGN KEY (course_id) REFERENCES course(course_id)
135
    ):
136
    CREATE TABLE IF NOT EXISTS student_management (
138
       admin_id INTEGER NOT NULL,
139
        student_id INTEGER NOT NULL,
        action TEXT,
        date DATETIME NOT NULL,
       PRIMARY KEY (admin_id, student_id, date),
143
       FOREIGN KEY (admin_id) REFERENCES admin(admin_id),
144
       FOREIGN KEY (student_id) REFERENCES student(student_id)
145
146
    );
147
    PRAGMA foreign_keys = OFF;
149
    INSERT INTO admin (admin_id, first_name, middle_name, last_name, admin_email, personal_email,
150
        password) VALUES
    (101, 'John', 'Doe', 'Smith', 'admin01@uni.com', 'johndoesmith@gmail.com', 'admin01pass'),
    (102, 'Jane', 'Doe', 'Smith', 'admin02@uni.com', 'janedoesmith@gmail.com', 'admin02pass'),
    (103, 'Toby', 'Doe', 'Smith', 'admin03@uni.com', 'tobydoesmith@gmail.com', 'admin03pass');
    INSERT INTO student (student_id, first_name, middle_name, last_name, student_email,
        personal_email, major, password) VALUES
    (201, 'Sharon', 'Ogden', 'Bullard', 'student01@uni.com', 'sharonogdenbullard@gmail.com', 'Math',
156
        'student01pass'),
    (202, 'Vince', 'Dani', 'Woodcock', 'student02@uni.com', 'vincedaniwoodcock@gmail.com', 'Math',
        'student02pass'),
   (203, 'Isiah', 'Deacon', 'Blakeley', 'student03@uni.com', 'isiahdeaconblakeley@gmail.com',
```

```
'Computer Science', 'student03pass'),
    (204, 'Earle', 'Derek', 'Tyrell', 'student04@uni.com', 'earlederektyrell@gmail.com', 'Computer
        Science', 'student04pass'),
    (205, 'Gavin', 'Kristi', 'Bronson', 'student05@uni.com', 'gavinkristibronson@gmail.com',
160
        'Biology', 'student05pass');
161
    INSERT INTO faculty (faculty_id, first_name, middle_name, last_name, faculty_email,
        personal_email, department, password) VALUES
    (301, 'Tameka', 'Kirk', 'Weaver', 'faculty01@uni.com', 'tamekakirkweaver@gmail.com', 'Math',
        'faculty01pass'),
    (302, 'Portia', 'Rosanna', 'Geary', 'faculty02@uni.com', 'portiarosannageary@gmail.com',
        'Computer Science', 'faculty02pass'),
    (303, 'David', 'Victoria', 'Summers', 'faculty03@uni.com', 'davidvictoriasummers@gmail.com',
165
        'Biology', 'faculty03pass');
166
    INSERT INTO course (course_id, section, title, credits, capacity, syllabus, info, instructor_id,
167
        room, department, term, year) VALUES
    (401, '001', 'Calculus I', 3, 30, 'syllabus', 'info', 301, 'M101', 'Math', 'Fall', 2020),
    (402, '001', 'Calculus II', 3, 30, 'syllabus', 'info', 301, 'M101', 'Math', 'Fall', 2020),
169
    (403, '001', 'Calculus III', 3, 30, 'syllabus', 'info', 301, 'M101', 'Math', 'Fall', 2020),
    (404, '001', 'Discrete Mathematics', 3, 30, 'syllabus', 'info', 301, 'M101', 'Math', 'Winter',
    (405, '001', 'Linear Algebra', 3, 30, 'syllabus', 'info', 301, 'M101', 'Math', 'Winter', 2021),
    (406, '001', 'Differential Equations', 3, 30, 'syllabus', 'info', 301, 'M101', 'Math', 'Winter',
        2021),
    (407, '001', 'Computer Science I', 3, 30, 'syllabus', 'info', 302, 'CS102', 'Computer Science',
174
         'Fall', 2020),
    (408, '001', 'Computer Science II', 3, 30, 'syllabus', 'info', 302, 'CS102', 'Computer Science',
        'Fall', 2020),
    (409, '001', 'Data Structures', 3, 30, 'syllabus', 'info', 302, 'CS102', 'Computer Science',
        'Winter', 2021),
    (410, '001', 'Biology I', 3, 30, 'syllabus', 'info', 303, 'B103', 'Biology', 'Fall', 2020),
177
    (411, '001', 'Biology II', 3, 30, 'syllabus', 'info', 303, 'B103', 'Biology', 'Winter', 2021);
178
179
    INSERT INTO enrollments (student_id, course_id, grade, status) VALUES
180
    (201, 401, 93, 'Passed'),
181
    (201, 402, 95, 'Passed'),
    (201, 403, 86, 'Passed'),
    (201, 404, 100, 'Passed'),
184
    (201, 405, 97, 'Passed'),
185
    (201, 406, NULL, 'In Progress'),
186
    (202, 401, 90, 'Passed'),
187
    (202, 402, NULL, 'In Progress'),
    (203, 407, 95, 'Passed'),
    (203, 408, 100, 'Passed'),
    (203, 409, 97, 'Passed'),
191
    (204, 407, 93, 'Passed'),
192
    (204, 408, NULL, 'In Progress'),
193
    (205, 410, 95, 'Passed');
194
195
    INSERT INTO department (department_name, department_email, department_chair) VALUES
    ('Math', 'math@uni.com', 301),
197
    ('Computer Science', 'computerscience@uni.com', 302),
198
    ('Biology', 'biology@uni.com', 303);
199
200
    INSERT INTO timeblock (timeblock_id, day, start_time, end_time) VALUES
201
    ("monday_morning", "Monday", "08:00:00", "11:00:00"),
202
    ("monday_afternoon", "Monday", "13:00:00", "16:00:00"),
   ("tuesday_morning", "Tuesday", "08:00:00", "11:00:00"),
```

```
("tuesday_afternoon", "Tuesday", "13:00:00", "16:00:00"),
    ("wednesday_morning", "Wednesday", "08:00:00", "11:00:00"),
206
    ("wednesday_afternoon", "Wednesday", "13:00:00", "16:00:00"),
207
    ("thursday_morning", "Thursday", "08:00:00", "11:00:00"),
208
    ("thursday_afternoon", "Thursday", "13:00:00", "16:00:00"),
    ("friday_morning", "Friday", "08:00:00", "11:00:00"),
    ("friday_afternoon", "Friday", "13:00:00", "16:00:00");
211
212
    INSERT INTO classroom(room_number, building) VALUES
213
    ("M101", "Math Building"),
214
    ("CS102", "Computer Science Building"),
    ("B103", "Biology Building");
    INSERT INTO term(term, year, registration_deadline, drop_deadline) VALUES
    ("Fall", 2020, "2020-09-30", "2020-12-31"),
219
    ("Winter", 2021, "2020-1-30", "2020-04-30"),
    ("Fall", 2021, "2021-09-30", "2021-12-31");
    INSERT INTO prerequisites (course_id, prereq_id) VALUES
    (402, 401),
    (403, 402),
225
    (405, 402),
226
    (405, 404),
227
    (406, 403),
    (408, 407),
    (409, 407),
    (411, 410);
231
232
    insert into courseblock (course_id, timeblock_id) VALUES
233
    (401, "monday_morning"),
234
    (402, "tuesday_morning"),
    (403, "wednesday_morning"),
    (404, "monday_morning"),
    (405, "tuesday_morning"),
238
    (406, "wednesday_morning"),
239
    (407, "thursday_morning"),
240
    (408, "friday_morning"),
    (409, "thursday_morning"),
    (410, "monday_afternoon"),
    (411, "friday_afternoon");
245
    PRAGMA foreign_keys = ON;
```