

Computer Science 275  
Database Management Notes Notes

Carter Clifton

Winter 2025

# Contents

<b>Lecture 1</b>	<b>3</b>
Outline . . . . .	3
What is a Database? . . . . .	3
What is a Database Management System (DBMS)? . . . . .	3
Importance of Databases . . . . .	3
Why Do We Need Database Management Systems? . . . . .	4
Types of Databases . . . . .	4
What is a Data Model? . . . . .	5
Types of Data Models . . . . .	5
Real-World Applications of Databases . . . . .	7
Summary . . . . .	7
<b>Lecture 2</b>	<b>9</b>
Outline . . . . .	9
Data Abstraction . . . . .	9
Levels of Data Abstraction . . . . .	9
Instances and Schemas . . . . .	10
Database Languages . . . . .	10
Data-Definition Language . . . . .	10
Data-Manipulation Language . . . . .	11
Database Design . . . . .	12
Database Users and Administrators . . . . .	13
Summary . . . . .	14
<b>Lecture 3</b>	<b>15</b>
Outline . . . . .	15
Overview of SQL (Structured Query Languages) . . . . .	15
History of SQL . . . . .	15
Key Features of SQL . . . . .	16
Basic SQL Commands . . . . .	16
SQL Aggregate Functions . . . . .	17
SQL Queries with Clauses . . . . .	18
Summary . . . . .	19
<b>Lecture 4</b>	<b>21</b>
Outline . . . . .	21
SQL Logical Operator . . . . .	21
SQL NULL Values . . . . .	21
SQL CREATE / DROP DATABASE Statement . . . . .	22
SQL CREATE TABLE Statement . . . . .	22
SQL DROP TABLE Statement . . . . .	22
SQL ALTER TABLE Statement . . . . .	22
SQL Data Types . . . . .	23

SQL Constraints . . . . .	24
SQL Constraint Examples . . . . .	24
Summary . . . . .	26
<b>Lecture 5</b>	<b>28</b>
Outline . . . . .	28
SQL Joins . . . . .	28
Different Types of SQL JOINs . . . . .	29
SQL LEFT JOIN . . . . .	29
SQL RIGHT JOIN . . . . .	30
SQL FULL JOIN . . . . .	30
SQL Self JOIN . . . . .	31
SQL Union . . . . .	31
Summary . . . . .	32
<b>Lectures 6 - 8</b>	<b>34</b>
Outline . . . . .	34
What is Entity-Relationship (ER) Modelling? . . . . .	34
Entities and Attributes . . . . .	35
Relationships . . . . .	37
Roles . . . . .	39
Weak Entities . . . . .	40
Sample ER Diagrams . . . . .	41
Summary . . . . .	42
<b>Lecture 9</b>	<b>44</b>
Outline . . . . .	44
The Extended Entity-Relationship (EER) Model . . . . .	44
Generalization and Specialization . . . . .	44
Union . . . . .	48
Sample EER Diagram . . . . .	50
Summary . . . . .	50
<b>Lectures 10 - 12</b>	<b>52</b>
Outline . . . . .	52
Introduction to the Relational Model . . . . .	52
Relational Data Structures . . . . .	52
Translating ER Diagrams to Relational Schemas . . . . .	53
Degree and Cardinality . . . . .	54
Relation Keys . . . . .	54
Integrity Constraints . . . . .	55
Representing Relational Database Schemas . . . . .	56
Mapping an Entity-Relationship Model to a Relational Schema . . . . .	56
EER to Relational Mapping Example . . . . .	61
Summary . . . . .	62
<b>Lecture 13</b>	<b>64</b>
Outline . . . . .	64
The Purpose of Normalization . . . . .	64
How Normalization Supports Database Design . . . . .	65
Data Redundancy and Update Anomalies . . . . .	65
Insertion Anomalies . . . . .	66
Deletion Anomalies . . . . .	66
Modification Anomalies . . . . .	66
Functional Dependencies . . . . .	67

Summary	68
---------	----

# Lecture 1

## Outline

- What is a Database?
- What is a Database Management System (DBMS)?
- Importance of Databases
- Why Do We Need Database Management Systems?
- Types of Databases
- Types of Data Models
- Real-World Applications of Databases

## What is a Database?

- A database is an organized collection of data stored electronically to support efficient access, management, and updating.
- Example: A library catalog that stores details about books, authors, and availability.

## What is a Database Management System (DBMS)?

- A DBMS is software that provides tools to store, retrieve, and manipulate data efficiently while ensuring data integrity and security.
- Examples: MySQL, Oracle Database, Microsoft SQL Server.

## Importance of Databases

- Centralized Data Storage: Avoids data redundancy and ensures consistency.
- Efficient Data Retrieval: Quick access to required data using queries.
- Data Security: Protects sensitive information from unauthorized access.
- Support for Multiple Users: Enables concurrent access without conflicts.

Database Pros:

- Improves data sharing and employees' productivity.
- Removes data redundancy.

- Provides greater security and privacy of data.
- Shows you an integrated view of your business.
- Raises your ability to increase profits as helps you understand better your business operations.
- Ensures consistency of data.
- Provides robust backup and recovery.
- Provides a clean and centralized view of your customers and helps you improve your marketing as well as serve better your customers.

Database Cons:

- Increased costs. The cost of maintaining the DBMS can include advanced hardware training, licensing, regulatory compliance, skilled employees, etc.
- Complex functionality that requires specific and appropriate skills.
- The failure of the database can have a severe negative impact on operations.

## Why Do We Need Database Management Systems?

Challenges with File Systems

- Data redundancy and inconsistency.
- Difficulty in accessing and updating data.
- Limited data security and concurrency control.

Feature	File System	DBMS
Data Redundancy	High	Low
Data Consistency	Difficult to Maintain	Ensured
Query Language	Not Available	SQL Support
Concurrent Access	Limited	Efficient
Security	Minimal	Robust

Advantages of DBMS

- Reduces Data Redundancy: Maintains a single version of data.
- Ensures Data Integrity: Validates data consistency across the system.
- Improves Security: Restricts unauthorized access.
- Provides Query Languages: Enables efficient data manipulation using SQL.
- Scales with Demand: Handles large data volumes and concurrent users effectively.

## Types of Databases

Distributed Databases

- Data is stored across multiple locations for redundancy and scalability.
- Example: Google Spanner

Relational Databases

- Data is organized into tables with rows and columns.
- Examples: MySQL, PostgreSQL

#### NoSQL Database

- Stores unstructured or semi-structured data.
- Examples: Document-based (MongoDB), Key-Value (Redis)

#### Cloud Database

- Hosted on cloud platforms for easy access and scalability.
- Examples: Amazon RDS, Google BigQuery

## What is a Data Model?

- A data model is a conceptual framework that defines how data is structured, organized, and manipulated in a database.
- It serves as a blueprint for designing and implementing databases, helping to standardize how data is stored and accessed.

Key purposes of a data model:

1. Representation: It represents real-world entities and their relationships.
2. Consistency: Ensures data consistency across the database.
3. Guidance: Provides a structure for database developers to design efficient databases.
4. Abstraction: Hides the complexity of data storage while offering a clear interface for users.

## Types of Data Models

### Hierarchical Data Model

- Description: Represents data in a tree-like structure, where each parent node can have multiple child nodes, but each child node has only one parent.
- Examples: Organizational charts, file systems.
- Advantages:
  - Fast data retrieval for hierarchical relationships.
  - Simple to implement for one-to-many relationships.
- Disadvantages:
  - Lacks flexibility for complex relationships.
  - Difficult to restructure.

### Network Data Model

- Description: Represents data using a graph structure where entities are nodes, and relationships are edges. Supports many-to-many relationships.
- Examples: Social networks, supply chain systems.
- Advantages:

- More flexible than the hierarchical model.
- Efficient for complex relationships.
- Disadvantages:
  - Complex to implement and manage.
  - Requires advanced query mechanisms.

### Relational Data Model

- Description: Organizes data into tables (relations) with rows (tuples) and columns (attributes). Relationships are defined using keys.
- Examples: Employee database, e-commerce systems.
- Advantages:
  - Easy to understand and use.
  - Flexible for querying using SQL.
  - Supports data integrity and normalization.
- Disadvantages:
  - May require significant computational resources for large-scale systems.

### Entity-Relationship (ER) Model

- Description: Uses diagrams to visually represent entities, their attributes, and relationships.
- Examples: University database, hospital management systems.
- Advantages:
  - Intuitive for database design.
  - Clearly defines relationships and constraints.
- Disadvantages:
  - Does not directly map to physical storage.

### Document Data Model

- Description: Stores data as documents, typically in JSON or XML format. Common in NoSQL databases.
- Examples: MongoDB, CouchDB
- Advantages:
  - Flexible schema for unstructured data.
  - Efficient for hierarchical data storage.
- Disadvantages:
  - Less suited for complex relationships.
  - Limit support for ACID transactions.

### Key-Value Data Model

- Description: Stores data as key-value pairs, where each key is unique.

- Examples: Redis, DynamoDB
- Advantages:
  - High performance and scalability.
  - Simple and easy to implement.
- Disadvantages:
  - Limited querying capabilities.
  - Not ideal for complex relationships.

**Note:** The Document Data Model and Key-Value Data Model are both NoSQL Models.

Choosing the right Data Model

- Relational Data Model: Ideal for structured data with complex relationships.
- NoSQL Models (Document, Key-Value): Best for unstructured or semi-structured data and scalability needs.
- Hierarchical or Network Models: Suitable for legacy systems or well-defined hierarchical relationships.

## Real-World Applications of Databases

Banking

- Purpose: Manages accounts, transactions, and customer data.
- Example: ATMs access centralized databases to process transactions.

E-Commerce

- Purpose: Tracks products, orders, and customer interactions.
- Example: Amazon's database stores millions of product details.

Healthcare

- Purpose: Maintains patient records and doctor schedules.
- Example: Electronic Health Record (EHR) systems.

Transportation

- Purpose: Schedules routes and tracks bookings
- Airline reservation systems.

## Summary

- What is a Database?
  - Organized collection of electronic data for efficient access and management.
  - Example: Library catalog.
- What is a Database Management System (DBMS)?
  - Software for storing, retrieving, and manipulating data while ensuring integrity and security.
  - Examples: MySQL, Oracle, SQL Server.

- Importance of Databases
  - Centralized storage, efficient retrieval, enhanced security, and support for multiple users.
  - Pros: Data sharing, security, consistency, backup, better business insights.
  - Cons: High cost, complexity, failure has a large impact on operations.
- Why Do We Need DBMS?
  - Solves file system challenges like redundancy, inconsistency, and limited security.
  - Advantages: Reduces redundancy, improves integrity, security, scalability, and query capabilities (SQL).
- Types of Databases
  - Distributed: Data across multiple locations (e.g., Google Spanner).
  - Relational: Data in tables (e.g., MySQL).
  - NoSQL: Unstructured data (e.g., MongoDB).
  - Cloud: Hosted on cloud platforms (e.g., Amazon RDS).
- Types of Data Models
  - Hierarchical: Tree-like structure (e.g., file systems).
  - Network: Graph structure for many-to-many relationships.
  - Relational: Tables with rows and columns (SQL-based).
  - Entity-Relationship (ER): Visual diagrams for design.
  - Document: JSON / XML-based (MongoDB).
  - Key-Value: Pairs of data (Redis).
- Choosing the Right Data Model
  - Relational for structured data.
  - NoSQL for unstructured data.
  - Hierarchical / Network for legacy systems.
- Real-World Applications
  - Banking: Manages transactions and accounts.
  - E-Commerce: Tracks products and orders.
  - Healthcare: Maintains patient records.
  - Transportation: Schedules routes and bookings.

# Lecture 2

## Outline

- Data Abstraction
- Instances and Schemas
- Database Languages
- Database Design Phases
- Database Users and Administrators

## Data Abstraction

- To improve efficiency, database system developers use complex data structures to represent data in the database.
- Since many database-system users are not computer trained, developers hide the complexity from users through several levels of data abstraction
- Abstraction simplifies the interaction with the database by separating the logical aspects of data management from the physical details of data storage.

## Levels of Data Abstraction

### 1. Physical Level (Storage Level)

- This is the lowest level of abstraction, describing how data is physically stored in the database, such as on disks or memory.
- Details Included:
  - File structures (e.g., sequential files, B-trees).
  - Storage allocation and indexing methods.
  - Block sizes and compression techniques.
- Users:
  - Database administrators (DBAs) and system architects.
- Example: A database file stored on disk using B-trees for indexing.

### 2. Logical Level (Conceptual Level)

- This level describes what data is stored in the database and the relationships between the data. It abstracts away the physical storage details.
- Details Included:

- Tables, columns, rows, and constraints.
- Relationships like primary and foreign keys.
- High-level schema definition.
- Users:
  - Database designers and developers.
- Example: A “Student” table with attributes like StudentID, Name, and Major, along with relationships to other tables.

### 3. View Level (External Level)

- This is the highest level of abstraction, providing a user-specific view of the database. It hides the complexity of both the physical and logical levels.
- Details Included:
  - Customized data views for different users.
  - Simplified interfaces for querying data.
- Users:
  - End-users and application developers.
- Example: A university professor sees only the courses they teach, not the entire database.

## Instances and Schemas

Aspect	Instance	Schema
Definition	Data stored in the database at a specific point in time (snapshot).	The overall design or structure of the database.
Nature	Dynamic, changes over time as data is added, updated or deleted.	Static, remains relatively constant.
Analogy	Values of variables in a program at a specific time.	Variable declarations and type definitions in a program.
Levels	Not applicable.	<ul style="list-style-type: none"> <li>- Physical Schema: Design at the physical storage level.</li> <li>- Logical Schema: Logical organization of data.</li> <li>- View Schema: User-specific views (subschemas).</li> </ul>
Purpose	Represents the current state of the database.	Provides the blueprint for how data is structured and managed.

## Database Languages

A database language has two types:

- A data-definition language (DDL) to specify the database schema and some additional properties of the data.
- A data-manipulation language (DML) to express database queries and updates.

## Data-Definition Language

### 1. Database Schema Specification: Defined using a Data-Definition Language (DDL)

2. Storage and Access Methods: A specialized DDL, called the data storage and definition language, defines the storage structure and access methods, hiding the implementation details from users.
3. Consistency Constraints: DDL allows defining constraints to ensure data integrity, which the database checks during updates.
  - Processing DDL statements generates metadata stored in a data dictionary.
  - Data Dictionary: A system-managed table that holds “data about data”. The data dictionary is accessed by the database system to validate schema, constraints, and authorizations before performing any operations.

Types of Constraints:

- Domain Constraints: Attributes are associated with specific domains (e.g., integers, characters), restricting the values they can take. These are the simplest integrity constraints.
- Referential Integrity: Ensures that relationships between tables are valid (e.g., foreign key values must exist in the referenced table). Violations result in rejecting the operation.
- Authorization: Differentiates user access types, including read, insert, update, and delete permissions, ensuring controlled data access.

SQL:

- SQL provides a rich DDL that allows one to define tables with data types and integrity constraints.
- For instance, the following SQL DDL statement defines the department table:  

```
create table department
(dept name char (20),
building char (15),
budget numeric (12,2));
```

## Data-Manipulation Language

A data-manipulation language (DML) is a language that enables users to access or manipulate the data as organized by the appropriate data model. The types of access are:

- Retrieval of information stored in the database.
- Insertion of new information into the database.
- Deletion of information from the database.
- Modification of information stored in the database.

There are basically two types of data-manipulation languages:

1. Procedural DMLs require a user to specify what data are needed and how to get those data.
2. Declarative DMLs (also referred to as nonprocedural DMLs) require a user to specify what data are needed without specifying how to get those data.

Declarative DMLs are usually easier to learn and use than procedural DMLs.

- A query is a statement requesting the retrieval of information.
- The portion of a DML that involves information retrieval is called a query language.
- The SQL query language nonprocedural.

- A query takes as input several tables (possibly only one) and always returns a single table.
- Example of an SQL query that finds the names of all instructors in the History department:  

```
select instructor.name
from instructor
where instructor.dept_name = 'History';
```

## Database Design

### 1. Requirements Analysis

- Understand and document the needs of the users and the application.
- Activities:
  - Collect requirements through interviews, surveys, or use case analysis.
  - Identify what data needs to be stored and how it will be accessed.
- Output: A detailed requirements specification document.

### 2. Conceptual Design

- Create a high-level, abstract representation of the database structure.
- Activities:
  - Use Entity-Relationship (ER) models or similar tools to define entities, attributes, and relationships.
  - Focus on what data to store, not how it will be stored.
- Output: A conceptual schema (e.g., ER diagram).

### 3. Logical Design

- Convert the conceptual design into a logical structure suitable for a specific database model (e.g., relational model).
- Activities:
  - Map entities and relationships into tables, columns, and keys.
  - Normalize the database to reduce redundancy and improve consistency.
- A logical schema (e.g., relational schema).

### 4. Physical Design

- Define the physical storage structure and access methods for the database.
- Activities:
  - Decide on file structures, indexing, and partitioning.
  - Optimize the database for performance based on expected workloads.
- Output: A physical schema detailing how data will be stored and accessed.

Database Design Phases:

**Requirements → Conceptual Design → Logical Design → Physical Design**

## Database Users and Administrators

- Database users interact with the database system to retrieve, update, and manage data.
- They can be categorized based on their interaction and access levels:
  1. End Users: Individuals who interact with the database for specific tasks.  
Types:
    - Casual Users: Use query interfaces or tools to retrieve data (e.g., managers running reports).
    - Naive / Parametric Users: Use pre-designed applications to perform specific tasks (e.g., bank tellers, retail clerks).
    - Sophisticated Users: Use advanced tools or write queries directly (e.g., analysts).
    - Stand-Alone Users: Maintain personal databases using general-purpose tools (e.g., Microsoft Access).
  2. Application Programmers: Developers who write application programs to interact with the database.  
Tasks:
    - Write code for database interactions using APIs or embedded SQL.
    - Create user interfaces for end-users.
  3. Specialized Users: Experts who interact with the database using complex queries and techniques.  
Examples:
    - Data scientists analyzing large datasets.
    - Researchers performing specialized computations.

### Database Administrators (DBAs)

- A Database Administrator is responsible for managing and maintaining the database system to ensure its reliability, performance, and security.
- Key Responsibilities:
  - Database Design and Implementation:
    - \* Define schemas and storage structures.
    - \* Ensure efficient design and normalization.
  - Performance Monitoring and Optimization:
    - \* Monitor database performance.
    - \* Optimize queries, indexing, and storage.
  - Backup and Recovery:
    - \* Create and manage backup strategies.
    - \* Ensure data recovery in case of system failure.
  - Security and Authorization:
    - \* Define user roles and permissions.
    - \* Protect data from unauthorized access.
  - Maintenance and Updates:
    - \* Apply updates and patches to the database system.
    - \* Address issues and ensure database availability.
  - Data Integrity and Consistency:
    - \* Implement constraints and validation rules.
    - \* Ensure data quality and correctness.

# Summary

- Data Abstraction
  - Simplifies database interactions by complexity through abstraction levels:
    - \* Physical Level: How data is stored (e.g., B-trees, storage allocation).
    - \* Logical Level: What data is stored and relationships (e.g., tables, keys).
    - \* View Level: User-specific views hiding storage and logical details.
- Instances and Schemas
  - Instance: Data in the database at a specific time (dynamic).
  - Schema: The overall database design or structure (static).
    - \* Levels: Physical, Logical, View Schemas.
- Database Languages
  - Data-Definition Language (DDL): Defines schemas, storage, and constraints.
  - Data-Manipulation Language (DML): Accesses and manipulates data.
    - \* Declarative DML: Specifies what data is needed (e.g., SQL).
    - \* Procedural DML: Specifies what data and how to retrieve it.
- Database Design Phases
  - Requirements Analysis: Understand user needs.
  - Conceptual Design: High-level schema using ER models.
  - Logical Design: Map to tables, normalize data.
  - Physical Design: Define storage, indexing, and optimization.
- Database Users and Administrators
  - Users:
    - \* Casual, Naive, Sophisticated, and Stand-Alone users.
    - \* Application Programmers and Specialized Users.
  - Database Administrators (DBAs):
    - \* Manage design, performance, security, backups, and data integrity.

# Lecture 3

## Outline

- Overview of SQL
- History of SQL
- Key Features of SQL
- Basic SQL Commands
- SQL Aggregate Functions
- SQL Queries with Clauses

## Overview of SQL (Structured Query Languages)

- SQL is a standardized programming language specifically designed for managing, and manipulating relational databases.
- It allows users to create, retrieve, update, and delete data in databases.
- SQL is essential for interacting with relational database management systems (RDBMS) like MySQL, PostgreSQL, Oracle, and Microsoft SQL Server.

## History of SQL

### Early Development (1970s)

- 1970: Dr. Edgar F. Codd, a researcher at IBM, proposed the relational model in his seminal paper, “A relational Model of Data for Large Shared Data Banks”.
  - This model introduced the idea of organizing data into tables (relations) with rows and columns.
- 1974: Donald D. Chamberlin and Raymond F. Boyce at IBM developed a language called SEQUEL (Structured English Query Language) to interact with relational databases based on Codd’s model.
  - SEQUEL was later renamed to SQL due to trademark issues.

### Modern Developments (2000s and Beyond)

- SQL:2003: Added support for XML data.
- SQL:2008: Introduced advanced features like the MERGE statement.
- SQL:2011: Focused on temporal databases, adding support for time-based queries.
- SQL:2016: Enhanced JSON support to accommodate modern web and application development needs.
- SQL:2019: Introduced new features for working with big data (e.g., Polymorphic Table Functions).

## Key Features of SQL

1. Declarative Language: Users specify what data they need, not how to retrieve it.
2. Supports wide range of commands:
  - DDL (Data Definition Language): For defining and modifying database schemas (e.g., CREATE, ALTER, DROP).
  - DML (Data Manipulation Language): For querying and modifying data (e.g., SELECT, INSERT, UPDATE, DELETE).
  - DCL (Data Control Language): For controlling access to the database (e.g., GRANT, REVOKE).
  - TCL (Transaction Control Language): For managing transactions (e.g., COMMIT, ROLLBACK).
3. Platform Independence: SQL is supported by almost all relational database systems.
4. Data Integrity: Enforce rules and constraints to ensure data consistency.
5. Scalability: Efficiently handles large datasets.

## Basic SQL Commands

### SELECT Statement

- Purpose: Retrieve data from one or more tables.
- Syntax:

```
SELECT column1, column2, ...
FROM table_name
WHERE condition;
```
- Example: Retrieve all columns from the employee's table  

```
SELECT * FROM employees;
```

employee_id	first_name	last_name	department	salary
1234	Martha	Smith	Staff	40000
9876	Adam	Smith	Admin	50000
3456	John	White	HR	60000

- Example: Retrieve specific columns  

```
SELECT first_name, last_name FROM employees;
```

first_name	last_name
Martha	Smith
Adam	Smith
John	White

- Example: Retrieve employees in the HR department  

```
SELECT * FROM employees WHERE department = 'HR';
```

employee_id	first_name	last_name	department	salary
3456	John	White	HR	60000

### INSERT Statement

- Purpose: Add new rows to a table.

- Syntax:  
INTO INTO table\_name (column1, column2, ...) VALUES (value1, value2, ...);

- Example: Insert a new employee  
INSERT INTO employees (employee\_id,  
first\_name, last\_name, department, salary)  
VALUES (6546, 'John', 'Doe', 'HR', 60000);

employee_id	first_name	last_name	department	salary
1234	Martha	Smith	Staff	40000
9876	Adam	Smith	Admin	50000
3456	John	White	HR	60000
6546	John	Doe	HR	60000

### UPDATE Statement

- Purpose: Modify existing data in a table.
- Syntax:  
UPDATE table\_name SET column1 = value1,  
column2 = value2, ... WHERE condition;
- Example: Update the salary of an employee  
UPDATE employees SET salary = 65000  
WHERE first\_name = 'John' AND  
last\_name = 'Doe';

employee_id	first_name	last_name	department	salary
1234	Martha	Smith	Staff	40000
9876	Adam	Smith	Admin	50000
3456	John	White	HR	60000
6546	John	Doe	HR	65000

### DELETE Statement

- Purpose: Remove rows from a table.
- Syntax:  
DELETE FROM table\_name  
WHERE condition;
- Example: Delete an employee from the database  
DELETE FROM employees  
WHERE employee\_id = 1234;

employee_id	first_name	last_name	department	salary
9876	Adam	Smith	Admin	50000
3456	John	White	HR	60000
6546	John	Doe	HR	65000

## SQL Aggregate Functions

- An aggregate function is a function that performs a calculation on a set of values, and returns a single value.
- Aggregate functions are often used with the GROUP BY clause of the SELECT statement.
- The most commonly used SQL aggregate functions are:

- MIN() - Returns the smallest value within the selected column.
  - MAX() - Returns the largest value within the selected column.
  - COUNT() - Returns the number of rows in a set.
  - SUM() - Returns the total sum of a numerical column.
  - AVG() - Returns the average value of a numerical column.
- Aggregate functions ignore null values (except for COUNT()).

## SQL Queries with Clauses

### WHERE Clause

- Purpose: Filter rows based on conditions.
- Example: Show that employees with a salary greater than 50000  
`SELECT * FROM employees WHERE salary >50000;`

employee_id	first_name	last_name	department	salary
3456	John	White	HR	60000
6546	John	Doe	HR	65000

### GROUP BY Clause

- Purpose: Group rows that have the same values in specified columns.
- Example: Show the total salary by department:  
`SELECT department, SUM(salary) AS total_salary FROM employees GROUP BY department;`  
Input:

employee_id	first_name	last_name	department	salary
9876	Adam	Smith	Admin	50000
3456	John	White	HR	60000
6546	John	Doe	HR	65000

Output:

department	total_salary
Admin	50000
HR	125000

### HAVING Cause

- Purpose: Filter grouped rows based on aggregate conditions.
- Example: Show the departments with total salary greater than 100000:  
`SELECT department, SUM(salary) AS total_salary  
FROM employees  
GROUP BY department  
HAVING total_salary >100000;`

department	total_salary
HR	125000

### ORDER BY Clause

- Purpose: Sort the result set in ascending or descending order.

- Example: Sort employees by salary (descending)  
`SELECT * FROM employees ORDER BY salary DESC;`

employee_id	first_name	last_name	department	salary
6546	John	Doe	HR	65000
3456	John	White	HR	60000
9876	Adam	Smith	Admin	50000

## Summary

- Overview of SQL
  - SQL (Structured Query Language) is a standardized language for managing relational databases, supporting creation, retrieval, updating, and deletion of data. It is widely used with systems like MySQL, PostgreSQL, and Oracle.
- History of SQL
  - 1970: Dr. Edgar F. Codd introduced the relational model.
  - 1974: SEQUEL was developed at IBM, later renamed SQL.
  - Modern advancements include support for XML (SQL:2003), temporal databases (SQL:2011), JSON (SQL:2016), and big data (SQL:2019).
- Key Features of SQL
  - Declarative language: Focuses on what data to retrieve, not how.
  - Supports DDL (CREATE, ALTER), DML (SELECT, INSERT), DCL (GRANT, REVOKE), and TCL (COMMIT, ROLLBACK).
  - Platform-independent, enforces data integrity, and scalable for large datasets.
- Basic SQL Commands
  - SELECT: Retrieves data from tables.
    - \* `SELECT * FROM employees;` — Gets all columns from ‘employees’.
  - INSERT: Adds new rows.
    - \* `INSERT INTO employees VALUES (6546, ‘John’, ‘Doe’, ‘HR’, 60000);`
  - UPDATE: Modifies data.
    - \* `UPDATE employees SET salary = 65000 WHERE first_name = ‘John’;`
  - DELETE: Removes rows.
    - \* `DELETE FROM employees WHERE employee_id = 1234;`
- SQL Aggregate Functions
  - Perform calculations on a set of values. Common functions:
    - \* `MIN()`, `MAX()`, `COUNT()`, `SUM()`, `AVG()`.
- SQL Queries with Clauses
  - WHERE: Filters rows.
    - \* `SELECT * FROM employees WHERE salary > 50000;`
  - GROUP BY: Groups rows by column values.
    - \* `SELECT department, SUM(salary) as total_salary FROM employees GROUP BY department;`

- HAVING: Filters grouped rows.
  - \* `SELECT department FROM employees GROUP BY department HAVING SUM(salary) > 100000;`
- ORDER BY: Sorts results.
  - \* `SELECT * FROM employees ORDER BY salary DESC;`

# Lecture 4

## Outline

- SQL Logical Operator
- SQL NULL Values
- SQL CREATE / DROP DATABASE Statement
- SQL CREATE / DROP / ALTER TABLE Statement
- SQL Data Types
- SQL Constraints

## SQL Logical Operator

- The following SQL statement selects all customers from Spain that starts with a “G” or an “R”:  
SELECT \* FROM Customers  
WHERE Country = ‘Spain’ AND (CustomerName LIKE ‘G%’ OR CustomerName LIKE ‘R%’);
- Select only the customers that are NOT from Spain:  
SELECT \* FROM Customers  
WHERE NOT Country = ‘Spain’;
- Select customers that do not start with the letter ‘A’:  
SELECT \* FROM Customers  
WHERE CustomerName NOT LIKE ‘A%’;
- Select customers with a customerID not between 10 and 60:  
SELECT \* FROM Customers  
WHERE CustomerID NOT BETWEEN 10 AND 60;
- Select customers that are not from Paris or London  
SELECT \* FROM Customers  
WHERE City NOT IN (‘Paris’, ‘London’);

## SQL NULL Values

What is a NULL Value?

- A field with a NULL value is a field with no value.
- If a field in a table is optional, it is possible to insert a new record or update a record without adding a value to this field. Then, the field will be saved with a NULL value.
- Note: A NULL value is different from a zero value or a field that contains spaces. A field with a NULL value is one that has been left blank during record creation!

## **SQL CREATE / DROP DATABASE Statement**

- The CREATE DATABASE statement is used to create a new SQL database.
- Syntax:  
CREATE DATABASE database\_name;
- The DROP DATABASE statement is used to drop an existing SQL database.
- Syntax:  
DROP DATABASE database\_name;

## **SQL CREATE TABLE Statement**

- The CREATE TABLE statement is used to create a new table in a database.
- Syntax:  
CREATE TABLE table\_name (  
 column1 datatype,  
 column2 datatype,  
 column3 datatype,  
 ...  
);
- Example:  
CREATE TABLE Persons (  
 PersonID int,  
 LastName varchar(255),  
 FirstName varchar(255),  
 Address varchar(255),  
 City varchar(255)  
);

## **SQL DROP TABLE Statement**

- The DROP TABLE statement is used to drop an existing table in a database.
- Syntax:  
DROP TABLE table\_name;
- The TRUNCATE TABLE statement is used to delete the data inside a table, but not the table itself.
- Syntax:  
TRUNCATE TABLE table\_name;

## **SQL ALTER TABLE Statement**

- The ALTER TABLE statement is used to add, delete, or modify columns in an existing table.
- The ALTER TABLE statement is also used to add and drop various constraints on an existing table.
- Example: The following SQL adds an “Email” column to the “Customers” table:  
ALTER TABLE Customers  
ADD Email varchar(255);

- Example: The following SQL deletes the “Email” column from the “Customer’s” table:  

```
ALTER TABLE Customers
DROP COLUMN Email;
```

- To rename a column in a table, use the following syntax:

```
ALTER TABLE table_name
RENAME COLUMN old_name to new_name;
```

- To change the data type of a column in a table, use the following syntax:

```
ALTER TABLE table_name
MODIFY COLUMN column_name datatype;
```

## SQL Data Types

- The data type of a column defines what value the column can hold: integer, character, money, date and time, binary, and so on.
- An SQL developer must decide what type of data that will be stored inside each column when creating a table.
- Data types might have different names in different databases (e.g., MySQL, SQL Server, and MS Access). And even if the name is the same, the size and other details may be different! Always check the documentation.
- This course will use MySQL data types.

Data Type	Description
CHAR(size)	A FIXED length string (can contain letters, numbers, and special characters). The size parameter specifies the column length in characters - can be from 0 to 255. Default is 1.
VARCHAR(size)	A VARIABLE length string (can contain letters, numbers, and special characters). The size parameter specifies the maximum string length in characters - can be from 0 to 65535.
BINARY(size)	Equal to CHAR(), but stores binary byte strings. The size parameter specifies the column length in bytes. Default is 1.
BIT(size)	A bit-value type (numerical). The number of bits per value is specified in size. The size parameter can hold a value from 1 to 64. The default value for size is 1.
BOOL	Zero is considered as false, nonzero values are considered as true.
INT(size)	A medium integer. Signed range is from -2147483648 to 2147483647. Unsigned range is from 0 to 4294967295. The size parameter specifies the maximum display width (which is 255).
INTEGER(size)	Equal to INT(size).
DATE	A date. Format: YYYY-MM-DD. The supported range is from ‘1000-01-01’ to ‘9999-12-31’.
DATETIME(fsp)	A date and time combination. Format: YYYY-MM-DD hh:mm:ss. The supported range is from ‘1000-01-01 00:00:00’ to ‘9999-12-31 23:59:59’. Adding DEFAULT and ON UPDATE in the column definition to get automatic initialization and updating to the current date and time.
TIMESTAMP(fsp)	A timestamp. TIMESTAMP values are stored as the number of seconds since the Unix epoch (‘1970-01-01 00:00:00’ UTC). Format: YYYY-MM-DD hh:mm:ss. The supported range is from ‘1970-01-01 00:00:01’ UTC to ‘2038-01-09 03:14:07’ UTC. Automatic initialization and updating to the current date and time can be specified using DEFAULT CURRENT_TIMESTAMP and ON UPDATE CURRENT_TIMESTAMP in the column definition.
TIME(fsp)	A time. Format: hh:mm:ss. The supported range is from ‘-838:59:59’ to ‘838:59:59’.

- fsp stands for Fractional Seconds Precision. It ranges from 0 to 6.
- 0 means: No fractional seconds are stored (e.g., 2025-01-13 10:30:45).
- 6 means: Stores up to six digits for fractional seconds (e.g., 2025-01-13 10:30:45.123456).

## SQL Constraints

- SQL constraints are used to specify rules for data in a table.
- Constraints can be specified when the table is created with the CREATE TABLE statement, or after the table is created with the ALTER TABLE statement.
- Constraints can be column level or table level.

- Syntax:

```
CREATE TABLE table_name (
    column1 datatype constraint,
    column2 datatype constraint,
    column3 datatype constraint,
    ...
);
```

- The following constraints are commonly used in SQL:

- NOT NULL — Ensures that a column cannot have a NULL value.
- UNIQUE — Ensures that all values in a column are different.
- PRIMARY KEY — A combination of a NOT NULL and UNIQUE. Uniquely identifies each row in a table.
- FOREIGN KEY — Prevents actions that would destroy links between tables.
- CHECK — Ensures that the values in a column satisfies a specific condition.
- DEFAULT — Sets a default value for a column if no value is specified.
- CREATE INDEX — Used to create and retrieve data from the database very quickly.

## SQL Constraint Examples

- SQL NOT NULL on CREATE TABLE

- The following SQL ensures that the “ID”, “LastName”, and “FirstName” columns will NOT accept NULL values when the “Persons” table is created:

- Example:

```
CREATE TABLE Persons (
    ID int NOT NULL,
    LastName varchar(255) NOT NULL,
    FirstName varchar(255) NOT NULL,
    Age int
);
```

- Example:

```
ALTER TABLE Persons
ALTER COLUMN Age int NOT NULL;
```

- SQL UNIQUE Constraint

- The UNIQUE constraint ensures that all values in a column are different.
- The following SQL creates a UNIQUE constraint on the “ID” column.
- Example:

```
CREATE TABLE Persons (
    ID int NOT NULL UNIQUE,
    LastName varchar(255) NOT NULL,
```

```

    FirstName varchar(255),
    Age int
);

```

- Example:  
`ALTER TABLE Persons  
ADD UNIQUE (ID);`

- SQL PRIMARY KEY Constraint

- The PRIMARY KEY constraint uniquely identifies each record in a table.
- Primary keys must contain UNIQUE values, and cannot contain NULL values.
- A table can have only ONE primary key; and in the table, this primary key can consist of a single or multiple columns (fields).
- Example:  
`CREATE TABLE Persons (
 ID int NOT NULL,
 LastName varchar(255) NOT NULL,
 FirstName varchar(255),
 Age int,
 PRIMARY KEY (ID)
);`
- Example:  
`ALTER TABLE Persons  
ADD PRIMARY KEY (ID);`
- Example:  
`ALTER TABLE Persons  
DROP PRIMARY KEY;`

- SQL FOREIGN KEY Constraint

- The FOREIGN KEY constraint is used to prevent actions that would destroy links between tables.
- A FOREIGN KEY is a field (or collection of fields) in one table, that refers to the PRIMARY KEY in another table.
- The table with the foreign key is called the child table, and the table with the primary key is called the referenced or parent table.

PersonID	LastName	FirstName	Age
1	Hansen	Ola	30
2	Svendson	Tove	23
3	Pettersen	Kari	20

OrderID	OrderNumber	PersonID
1	77895	3
2	44678	3
3	22456	2
4	24562	1

- In the first table, PersonID is the primary key, in the second table, PersonID is the foreign key.
- The following SQL creates a FOREIGN KEY on the “PersonID” column when the “Orders” table is created:

```

CREATE TABLE Orders (
    OrderID int NOT NULL,
    OrderNumber int NOT NULL,
    PersonID int,
    PRIMARY KEY (OrderID),
    FOREIGN KEY (PersonID) REFERENCES Persons(PersonID)
);

```

- To create a FOREIGN KEY constraint on the “PersonID” column whe the “Orders” table is already created, use the following SQL:

```
ALTER TABLE Orders
ADD FOREIGN KEY (PersonID) REFERENCES Persons(PersonID);

ALTER TABLE Orders
DROP FOREIGN KEY FK_PersonOrder;
```

- SQL CHECK Constraint

- The CHECK constraint is used to limit the value range that can be placed in a column.

```
CREATE TABLE Persons (
    ID int NOT NULL,
    LastName varchar(255) NOT NULL,
    FirstName varchar(255),
    Age int,
    CHECK (Age >= 18)
);
```

```
ALTER TABLE Persons
ADD CHECK (Age >= 18);

ALTER TABLE Persons
DROP CONSTRAINT CHK_PersonAge;
```

- SQL DEFAULT Constraint

- The DEFAULT constraint is used to set a default value for a column.

```
CREATE TABLE Persons (
    ID int NOT NULL,
    LastName varchar(255) NOT NULL,
    FirstName varchar(255),
    Age int,
    City varchar(255) DEFAULT 'Sandnes'
);
```

```
ALTER TABLE Persons
ALTER City SET DEFAULT 'Sandnes';

ALTER TABLE Persons
ALTER City DROP DEFAULT;
```

## Summary

- SQL Logical Operators

- Using AND, OR, NOT, LIKE, BETWEEN, and IN to filter records.

- SQL Null Values

- NULL represents missing or undefined data, different from zero or blank spaces.

- SQL Database Management

- CREATE DATABASE and DROP DATABASE statements for database creation and deletion.

- SQL Table Management

- CREATE TABLE, DROP TABLE, TRUNCATE TABLE, and ALTER TABLE statements for table creation, modification, and deletion.

- SQL Data Types
  - Includes CHAR, VARCHAR, BINARY, BIT, BOOL, INT, INTEGER, DATE, DATETIME, TIMESTAMP, and TIME.
- SQL Constraints
  - Rules for ensuring data integrity, including:
    - \* NOT NULL: Prevents NULL values.
    - \* UNIQUE: Ensures column values are unique.
    - \* PRIMARY KEY: Combines NOT NULL and UNIQUE for row identification.
    - \* FOREIGN KEY: Maintains relationships between tables.
    - \* CHECK: Enforces a specific conditions.
    - \* DEFAULT: Sets a default column value.
    - \* CREATE INDEX: Speeds up data retrieval.

# Lecture 5

## Outline

- SQL Joins
  - (INNER) JOIN
  - LEFT (OUTER) JOIN
  - RIGHT (OUTER) JOIN
  - FULL (OUTER) JOIN
  - SQL Self JOIN
- SQL UNION

## SQL Joins

- A JOIN clause is used to combine rows from two or more tables, based on a related column between them.
- Consider the tables:

OrderID	CustomerID	Order Date
10308	2	1996-09-18
10309	37	1996-09-19
10310	77	1996-09-20

CustomerID	CustomerName	ContactName	Country
1	Alfred Futterkiste	Maria Anders	Germany
2	Ana Trujillo Emparedados	Ana Trujillo	Mexico
3	Antonio Moreno Taqueria	Antonio Moreno	Mexico

- We can create the following SQL statement (that contains an INNER JOIN), that selects records that have matching values in both tables:

```
SELECT Orders.OrderID, Customers.CustomerName, Orders.OrderDate  
FROM Orders  
INNER JOIN Customers ON Orders.CustomerID = Customers.CustomerID;
```

OrderID	CustomerID	OrderDate
10308	Ana Trujillo Emparedados	9 / 18 / 1996
10365	Antonio Moreno Taqueria	11 / 27 / 1996
10383	Around the Horn	12 / 16 / 1996
10355	Around the Horn	11 / 15 / 1996
10278	Berglunds Snabbkop	8 / 12 / 1996

## Different Types of SQL JOINS

- Here are the different types of JOINS in SQL:
  - (INNER) JOIN: Returns records that have matching values in both tables.
  - LEFT (OUTER) JOIN: Returns all records from the left table, and the matched records from the right table.
  - RIGHT (OUTER) JOIN: Returns all records from the right table, and the matched records from the left table.
  - FULL (OUTER) JOIN: Returns all records when there is a match in either left or right table.



## SQL LEFT JOIN

- The LEFT JOIN keyword returns all records from the left table (table1), and the matching records from the right table (table2).
- The result is 0 records from the right side, if there is no match.

```
SELECT Customers.CustomerName, Orders.OrderID
FROM Customers LEFT JOIN Orders ON Customers.CustomerID = Orders.CustomerID
ORDER BY Customers.CustomerName;
```

*Note: These tables do not include every entry*

**Table 1:**

CustomerID	CustomerName	ContactName	Address	City	PostalCode	Country
1	Alfred Futterkiste	Maria Anders	Obere Str. 57	Berlin	12209	Germany
2	Ana Trujillo	Ana Trujillo	Avda. de la Constitucion 2222	Mexico D.F.	05021	Mexico
3	Antonio Moreno Taqueria	Antonio Moreno	Mataderos 2312	Mexico D.F.	05023	Mexico

**Table 2:**

OrderID	CustomerID	EmployeeID	OrderDate	ShipperID
10308	2	7	1996-09-18	3
10309	37	3	1996-09-19	1
10310	77	8	1996-09-20	2

**Result:**

CustomerName	OrderID
Alfred Futterkiste	10308
Ana Trujillo	10365
Antonio Moreno Taqueria	10365
Around the Horn	10383
Berglunds Snabbkop	10278
Berglunds Snabbkop	10280

## SQL RIGHT JOIN

- The RIGHT JOIN keyword returns all records from the right table (table2), and the matching records from the left table (table1).
- The result is 0 records from the left side, if there is no match.

```
SELECT Orders.OrderID, Employees.LastName, Employees.FirstName
FROM Orders RIGHT JOIN Employees ON Orders.EmployeeID = Employees.EmployeeID
ORDER BY Orders.OrderID;
```

*Note: These tables do not include every entry*

**Table 1:**

OrderID	CustomerID	EmployeeID	OrderDate	ShipperID
10308	2	7	1996-09-18	3
10309	37	3	1996-09-19	1
10310	77	8	1996-09-20	2

**Table 2:**

EmployeeID	LastName	FirstName	BirthDate	Photo
1	Davolio	Nancy	12/8/1968	EmployeeD1.pic
2	Fuller	Andrew	2/19/1952	EmployeeD2.pic
3	Leverling	Janet	8/30/1963	EmployeeD3.pic

**Result:**

OrderID	LastName	FirstName
10248	West	Adam
10249	Buchanan	Steven
10250	Suyama	Michael
10251	Peacock	Margaret
10252	Leverling	Janet
10253	Peacock	Margaret
10254	Leverling	Janet
	Buchanan	Steven

## SQL FULL JOIN

- The FULL OUTER JOIN keyword returns all records when there is a match in the left (table1) or right (table2) table records.
- FULL OUTER JOIN and FULL JOIN are the same.

```
SELECT Customers.CustomerName, Orders.OrderID
FROM Customers FULL OUTER JOIN Orders ON Customers.CustomerID = Orders.CustomerID
ORDER BY Customers.CustomerName;
```

*Note: These tables do not include every entry*

**Table 1:**

CustomerID	CustomerName	ContactName	Address	City	PostalCode	Country
1	Alfred Futterkiste	Maria Anders	Obere Str. 57	Berlin	12209	Germany
2	Ana Trujillo	Ana Trujillo	Avda. de la Constitucion 2222	Mexico D.F.	05021	Mexico
3	Antonio Moreno Taqueria	Antonio Moreno	Mataderos 2312	Mexico D.F.	05023	Mexico

**Table 2:**

OrderID	CustomerID	EmployeeID	OrderDate	ShipperID
10308	2	7	1996-09-18	3
10309	37	3	1996-09-19	1
10310	77	8	1996-09-20	2

Result:

CustomerName	OrderID
Null	10309
Null	10310
Alfred Futterkiste	Null
Ana Trujillo	10308
Antonio Moreno Taqueria	Null

## SQL Self JOIN

- A self join is a regular join, but the table is joined with itself.
- Self Join Syntax:

```
SELECT column_name(s)
FROM table1 T1, table1 T2
WHERE condition;
```

- We have an employees table that stores information about employees and their managers.
- Each employee has a manager\_id that refers to another employee in the same table (their manager).
- The following query retrieves each employee along with their manager's name using a self join:

```
SELECT e1.name AS employee_name, e2.name AS manager_name
FROM employees e1, employees e2
WHERE e1.manager_id = e2.employee_id;
```

Table:

employee_id	name	manager_id
1	Alice	Null
2	Bob	1
3	Charlie	1
4	Diana	2
5	Edward	2

Result:

employee_name	manager_name
Alice	Null
Bob	Alice
Charlie	Alice
Diana	Bob
Edward	Bob

## SQL Union

- The UNION operator is used to combine the result-set of two or more SELECT statements.
  - Every SELECT statement within UNION must have the same number of columns.
  - The columns must also have similar data types.

- The columns in every SELECT statement must also be in the same order.

- UNION Syntax:

```
SELECT column_name(s) FROM table1
UNION
SELECT column_name(s) FROM table2;
```

- The following SQL statement returns the cities (only distinct values) from both the “Customers” and the “Suppliers” table:

```
SELECT City FROM Customers
UNION
SELECT City FROM Suppliers
ORDER BY City;
```

- Note: If some customers or suppliers have the same city, each city will only be listed once, because UNION selects only distinct values. Use UNION ALL to also select duplicate values!

**Result:**

City
Aachen
Albuquerque
Anchorage
Ann Arbor
Annecy
Arhus
Barcelona

## Summary

- SQL Joins

- Joins are used to combine rows from two or more tables based on a related column.

- \* INNER JOIN: Returns records with matching values in both tables.

```
SELECT Orders.OrderID, Customers.CustomerName, Orders.OrderDate
FROM Orders
INNER JOIN Customers ON Orders.CustomerID = Customers.CustomerID;
```

- \* LEFT JOIN (OUTER JOIN): Returns all records from the left table and matching records from the right table; unmatched records from the right table are NULL.

```
SELECT Customers.CustomerName, Orders.OrderID
FROM Customers
LEFT JOIN Orders ON Customers.CustomerID = Orders.CustomerID;
```

- \* RIGHT JOIN (OUTER JOIN): Returns all records from the right table and matching records from the left table; unmatched records from the left table are NULL.

```
SELECT Orders.OrderID, Employees.LastName, Employees.FirstName
FROM Orders
RIGHT JOIN Employees ON Orders.EmployeeID = Employees.EmployeeID;
```

- \* FULL JOIN (FULL OUTER JOIN): Returns all records from both tables, with NULLs in place for non-matching records.

```
SELECT Customers.CustomerName, Orders.OrderID
FROM Customers
FULL OUTER JOIN Orders ON Customers.CustomerID = Orders.CustomerID;
```

- \* Self JOIN: A table is joined with itself, commonly used for hierarchical relationships.

```
SELECT e1.name AS employee_name, e2.name AS manager_name  
FROM employees e1, employees e2  
WHERE e1.manager_id = e2.employee_id;
```

- SQL Union

- The UNION operator combines result sets of two or more SELECT statements, ensuring unique values unless UNION ALL is used.

- \* UNION does not include duplicates.

```
SELECT City FROM Customers  
UNION  
SELECT City FROM Suppliers;
```

- \* UNION ALL includes duplicates.

```
SELECT CITY FROM Customers  
UNION ALL  
SELECT City FROM Suppliers;
```


# Lectures 6 - 8

## Outline

- Introduction to ER Modelling
- Entities and Attributes
- Relationships
- ER Diagrams


## What is Entity-Relationship (ER) Modelling?

- ER modelling is a high-level data modelling technique used to define the structure of a database.
- It represents real-world data and its relationships in a conceptual model.
- Basis for creating relational databases.
- Purpose of ER Diagrams:
  - To visually represent data requirements.
  - Serve as a blueprint for database design.
  - Help stakeholders understand and validate data requirements.
- Core Components of ER Modelling:
  - Entities: Objects or concepts that can have data stored about them.
    - \* Examples: Students, Courses, Products.
  - Attributes: Properties or details of an entity.
    - \* Example: Student attributes include Name, StudentID, and Email.
  - Relationships: Associations between entities.
    - \* Example: “Enrolls” is a relationship between Students and Courses.

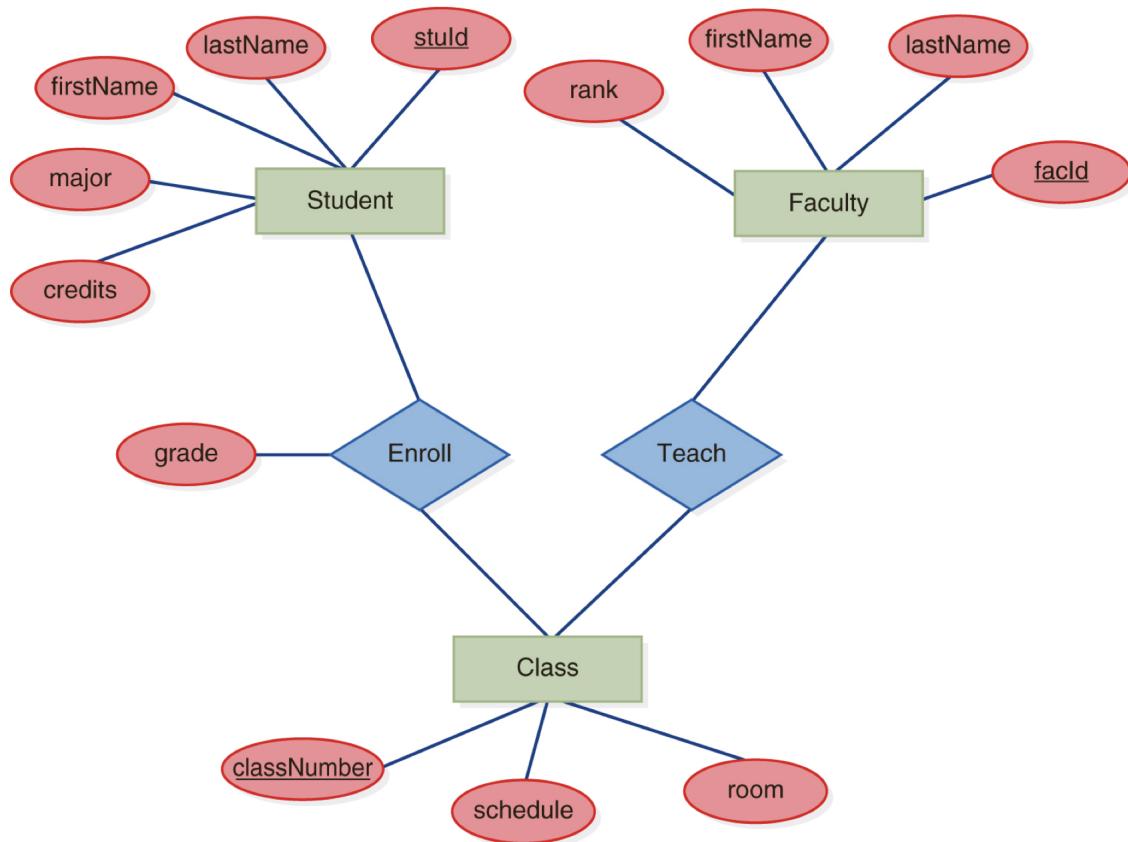

## Entities and Attributes


- Types of Entities:
  - Strong Entities
  - Weak Entities

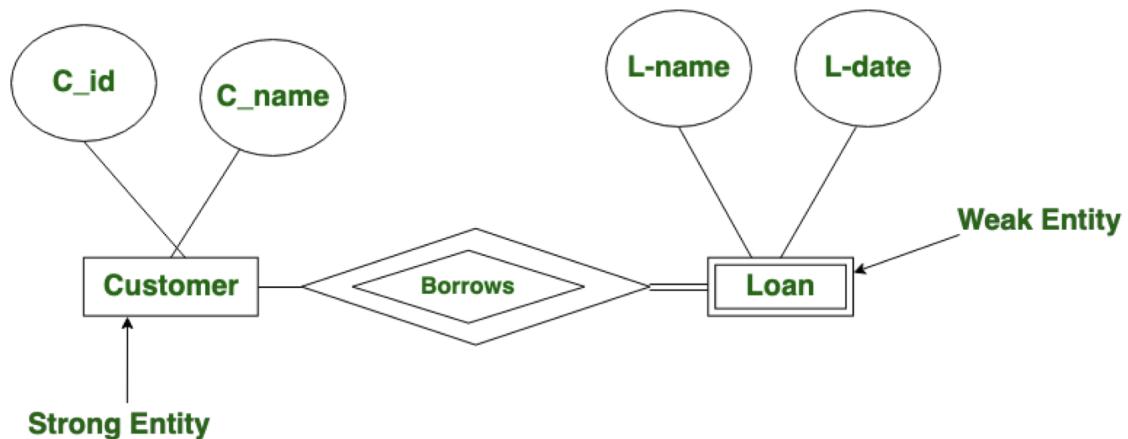

Strong Entity	Weak Entity
Strong entity always has a primary key.	While a weak entity has a partial discriminator key.
Strong entity is not dependent on any other entity.	Weak entity depends on strong entity.
Strong entity is represented by a single rectangle.	Weak entity is represented by a double rectangle.
Two strong entity's relationships is represented by a single diamond.	While the relationship between one strong and one weak entity is represented by a double diamond.
Strong entities either have total participation or partial participation.	A weak entity has a total participation constraint.


- Attribute Representation:

- Traditional ER Diagrams (Chen's Notation)
  - Attributes are represented as ovals (ellipses) connected to the entity or relationship they describe.

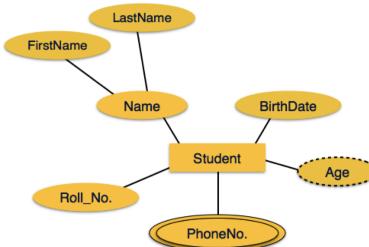

- Crow's Foot Notation or UML Style


- Attributes are often listed inside the box representing the entity.
- Attributes are written as a list below the entity's name, with key attributes (primary keys) often emphasized (e.g., underlined or bold).



- Types of Attributes:


- Simple Attributes:
  - Cannot be broken down further.
  - Example Roll\_No.
- Composite Attributes:
  - Can be divided into smaller parts.
  - Example: Address, Name (first and last).
- Derived Attributes:
  - Values that can be calculated from other attributes.
  - Example: Age (Calculated form Date of Birth).
- Multi-valued Attributes:
  - Can have multiple values.
  - Example: PhoneNumbers.
- Key Attribute:
  - Represented as an oval with the attribute name underlined. It represents the primary key.

- \* Example: Roll\_No for a Student Entity.

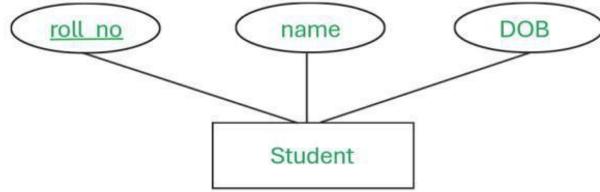


- Weak Key Attribute (Discriminator):

- \* Represented as an oval with a dashed underline.
- \* Example: Dog name in the Dog entity which is dependant on the Dog Owner.

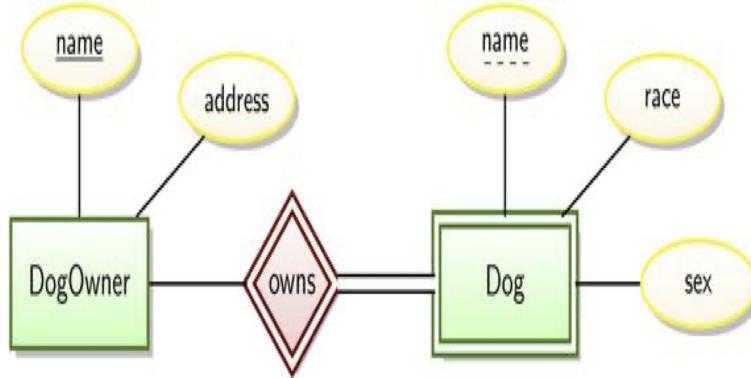


## Relationships

- Entities are often linked by associations or relationships, which are connections or interactions among the entity instances.
- For example, a student may be related to a class by being enrolled in that class.
- The name given to a relationship set is chosen by the designer. It is a good practice to choose a verb that captures the meaning of the relationship.
- The degree of a relationship is the number of entity sets that are linked by the relationship.
- A relationship that links two entity sets has degree two and is called binary, one that links three entity sets has degree three and is called ternary, and one that links more than three entity sets is called n-ary.

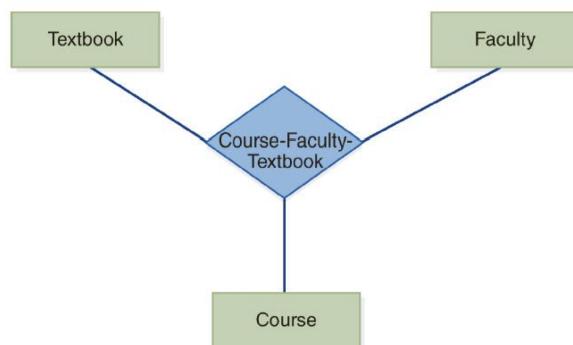


- It is also possible to have a unary relationship, one that links an entity to itself and has degree one.
- The most common type of relationship is binary.
- A relationship in which an entity set is related to itself is called recursive.

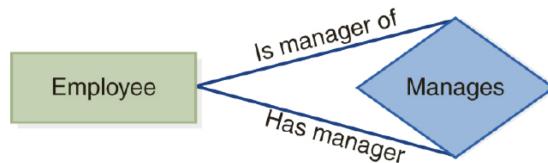


- If we had an entity set Employees, we might have a recursive Manages relationship that links each employee to his or her manager, who is also an employee. That set would be defined as:
- Sometimes a relationship set has descriptive attributes that belong to the relationship rather than or any of the entities involved.
- For example, the attribute grade is a descriptive attribute for the Enroll relationship set.
- The attribute grade does not describe the Student entity because each student can have grades for several classes, nor does it describe the Class entity because there are different grades given in a particular class for different students.
- Two types of constraints on relationships are participation constraints and cardinality.
- The cardinality of a binary relationship is the number of entity instances to which another entity instance can map under that relationship at any given time.
- There are four types of binary relationships:
  - One-to-one
    - \* A relationship R from entity set X to entity set Y is one-to-one if each entity instance in X is associated with at most one entity instance in Y.
    - \* Example: Every person has one SIN.
  - Many-to-many
    - \* A relationship R from entity set X to entity set Y is many-to-many if each entity instance in X can be associated with many entity instances in Y and each entity in Y can be associated with many entity instances in X.
    - \* Example: A student is enrolled in several courses and a course has many students.
  - Many-to-one
    - \* A relationship R from entity set X to entity set Y is many-to-one if each entity instance in X is associated with at most one entity instance in Y, but each entity instance in Y can be associated with many entity instances in X.
    - \* Example: Many people can have the same address.
  - One-to-many
    - \* A relationship R from entity set X to entity set Y is one-to-many if each entity instance in X can be associated with any entity instances in Y, but each entity instance in Y is associated with at most one entity instance in X.
    - \* Example: A person may have many cars, but a car is owned by one person.
- It is possible that not all members of an entity set participate in a relationship.
- For example, some faculty members may not be teaching this semester.

- If every member of an entity set must participate in a relationship, this is referred to as the total participation of the entity set in the relationship.
- A single line indicates that some members of the entity set may not participate in the relationship, which a situation called partial participation.
- A double line would imply that a person is not a student unless he or she is enrolled in some class.
- This double line means that no faculty member is not teaching any class.

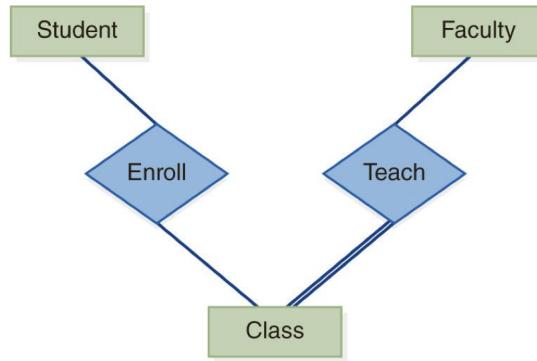

- Single lines or double lines showed participation for relationships.
- Relationship cardinality was shown by using “1” for “one” and “M” (or “m”, “N”, or “n”) for “many” on the appropriate lines.
- An alternative representation that shows both participation and cardinality constraints is the (min, max) notation.

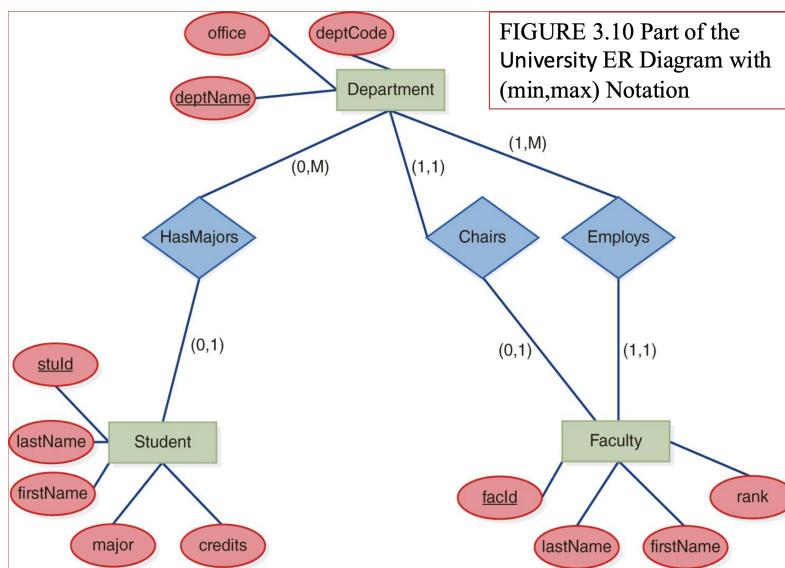


- Also, observe that the placement of (min, max) is between the entity and the relationship set, not between the entities, and it is the opposite from the placement of the cardinality in the 1:M notation.


## Roles

- In a relationship, each entity has a function called its role in the relationship.
- Usually, it is clear from the context what role an entity plays in a relationship.

- When an entity set is related to itself in a recursive relationship, it is necessary to indicate the roles that members play in the relationship.

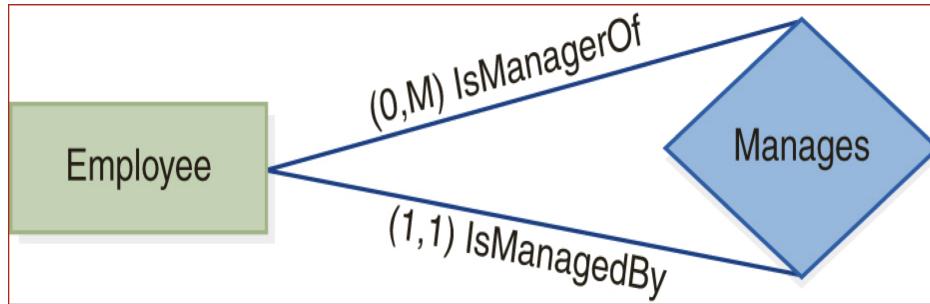


- Note that this is a one-to-many relationship in which every employee must have a manager (total participation), but not every employee has to be a manager.
- Another instance where role names are helpful occurs when the same two entity sets are related in two different ways.
- For example, suppose we wanted to represent two different relationships types between faculty members and students.
  - One type would be the usual Faculty-Student relationship, which we will call Teach in which the Faculty entity has the Teaches role, and the Student entity has the IsTaughtBy role.
  - Another is the Advise relationship, in which the Faculty entity has the Advises role and the Student entity has the IsAdvisedBy role.

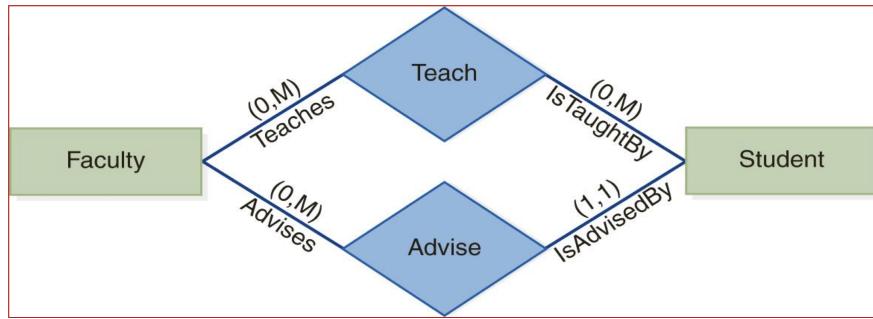

## Weak Entities

- A weak entity is an entity that cannot be uniquely identified by its own attributes alone.
- It depends on a strong entity (also called its owner entity) for identification and typically has a partial key.
- A weak entity is always associated with a relationship that links it to its strong entity, which is represented with a double diamond in an ER diagram.
- Characteristics of Weak Entities:
  - Dependence on Strong Entity: A weak entity relies on a strong entity for its primary key.
  - Partial Key: Weak entities have a partial key, which uniquely identifies them within the context of the related strong entity.
  - Existence Dependency: Weak entities cannot exist without the corresponding strong entity.

- A weak entity is depicted in the ER diagram by drawing a double rectangle around the entity and making the relationship diamond a double diamond.

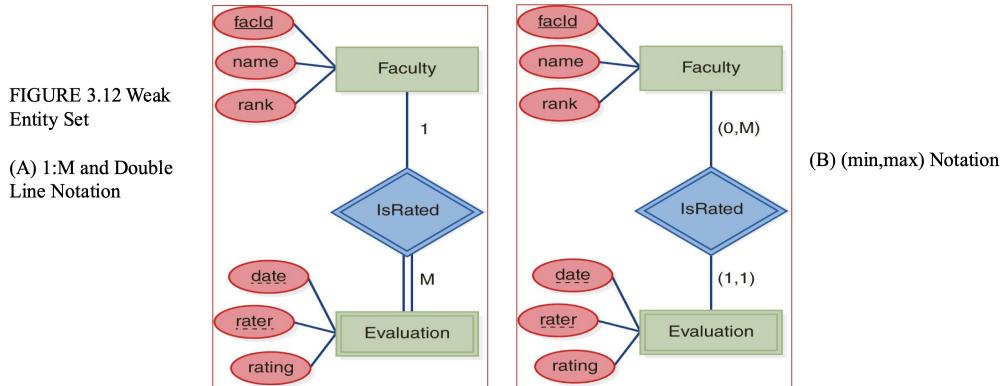


- When an entity is weak, it has no primary key of its own; it is unique only reference to its relationship to its owner.
- However, it often has a partial key, also called a discriminator, that allows us to uniquely identify the weak entities that belong to the same owner.
- The partial key may be a single attribute or a composite.
- The discriminator is indicated by a dashed underline on the ER diagram.
  - For Evaluation, date alone cannot be sufficient, if it is possible for a faculty member to be evaluated by two different people on the same date.
  - Therefore, we will use the combination of date and rater as the discriminator.

## Sample ER Diagrams

- To construct an ER diagram, we can begin with a scenario, a brief description of what information about the mini-world the database should contain.
- For a database for a university, let us assume that we want to keep information about students, the classes they are enrolled in, the faculty who teach those classes, and the textbooks used.
- We also want to represent departments that employ the faculty members, the faculty member who chairs each department, and teaching evaluations made of the faculty.
- Identify the entities of the University database:
- Our first task is to identify entities.
- Note that we do not make the enterprise one of the entities, so we will have no entity set called University because this is the entire enterprise. Everything in the diagram represents some facet of the university.
- A good way to identify entities is to look for nouns in the scenario that may be people, places, or events, or concepts.
- For each of these potential entities, we choose attributes that describe them, making assumptions as we record them.
- Ideally, we would consult with users before making these assumptions.
- To determine the attributes, we ask what facts about the entity would be important to keep in the database, and we think about the potential values we might store for those facts.

- We identify relationships.
- Relationships are usually indicated in the scenario by verbs that describe some type of interaction between the entities.
- For example, enroll, teach, employ, uses, made, and chairs, so we try out these relationships, drawing diamonds and connecting the entities to them.
- Then, we decide on cardinality and participation constraints for each relationship.

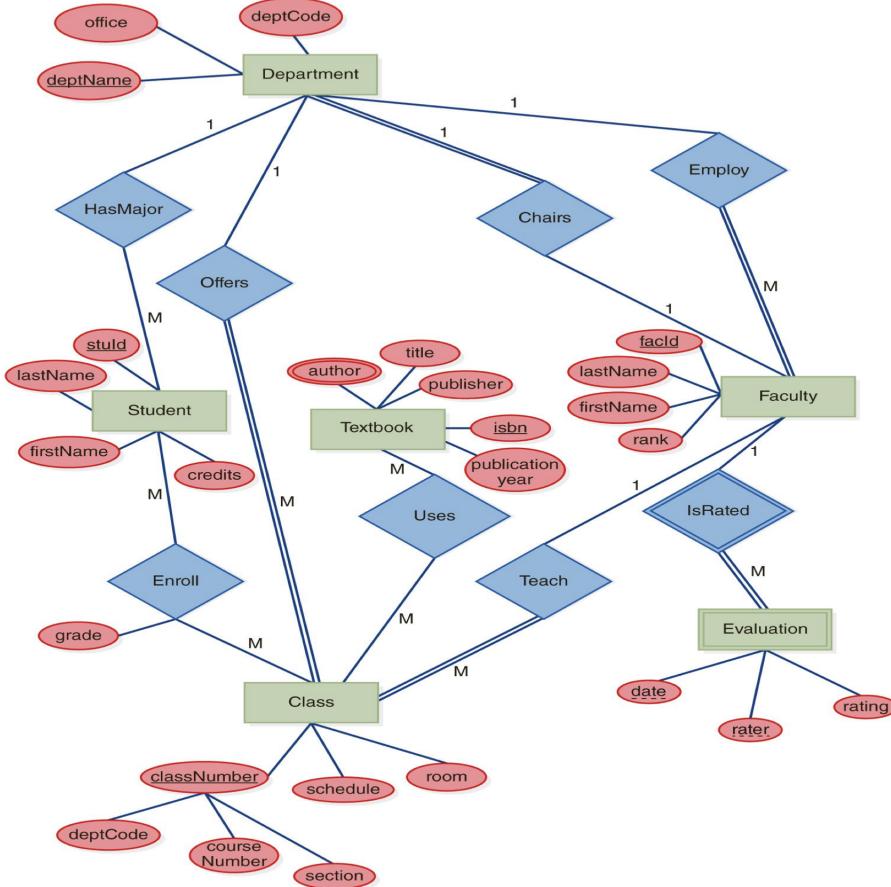

## Summary

- Strong vs. Weak Entities
  - Strong Entity: Has a primary key and is independent.
  - Weak Entity: Lacks a primary key, relies on a strong entity, and has a partial key (discriminator).
  - Representation:
    - \* Strong entities use a single rectangle; weak entities use a double rectangle.
    - \* Relationships between two strong entities are represented by a single diamond; relationships involving a weak entity use a double diamond.
  - Participation:
    - \* Strong entities can have total or partial participation.
    - \* Weak entities always have total participation.
- Attributes in ER Diagrams

- Simple Attributes: Cannot be broken down (e.g., Roll No).
- Composite Attributes: Can be divided into subparts (e.g., Address: Street, City).
- Derived Attributes: Computed from other attributes (e.g., Age from Date of Birth).
- Multi-Valued Attributes: Can have multiple values (e.g., PhoneNumbers).
- Key Attributes: Primary keys are underlined.
- Weak Key Attributes (Discriminator): Represented with a dashed underline.

- Relationships in ER Models

- Definition: Associations between entity instances (e.g., a student enrolls in a class).
- Types of Relationships (Based on Cardinality):
  - \* One-to-One (1:1): Each entity in X is linked to at most one in Y (e.g., A person has one SIN).
  - \* One-to-Many (1:M): One entity in X is linked to multiple in Y (e.g., A person owns multiple cars).
  - \* Many-to-One (M:1): Multiple entities in X link to one in Y (e.g., Many people share the same address).
  - \* Many-to-Many (M:N): Multiple entities in X link to multiple in Y (e.g., Students enroll in multiple courses).
- Participation Constraints:
  - \* Total Participation: Every entity must participate in the relationship (double line).
  - \* Partial Participation: Some entities may not participate (single line).
- Recursive Relationships: An entity relates to itself (e.g., An employee manages another employee).
- Roles: When entities have multiple relationships, role names help distinguish them (e.g., Faculty teaches students and advises them).

- Weak Entities and ER Diagrams

- Dependence on Strong Entity: Must be linked to a strong entity.
- Existence Dependency: Cannot exist independently.
- Partial Key (Discriminator): Identifies weak entities within a strong entity.
- Representation:
  - \* Double rectangle for weak entities.
  - \* Double diamond for the relationship.
  - \* Dashed underline for the discriminator.

- Constructing ER Diagrams

- Identify Entities: Look for nouns in the problem statement.
- Choose Attributes: Define key attributes and assumptions.
- Define Relationships: Identify verbs that describe interactions.
- Set Constraints: Determine cardinality and participation rules.

# Lecture 9

## Outline


- The Extended Entity-Relationship (EER) Model
- Generalization and Specialization
- Union
- Sample EER Diagrams

## The Extended Entity-Relationship (EER) Model


- The ER model is sufficient to represent data needs for traditional applications in business.
- The database used for geographical information systems, search engines, data mining, multimedia, and many other sophisticated applications must be capable of representing more semantic information than the standard ER models can express.
- The extended entity-relationship (EER) model expands the ER model to incorporate various types of abstraction and to express constraints more clearly.
- Additional symbols have been added to standard ER diagrams to create EER diagrams that express these concepts.

## Generalization and Specialization


- The process of generalization and its inverse, specialization, are two abstractions that are used to incorporate more meaning in EER diagrams.
- When we have an entity set (Faculty) contains one or more subsets (AdjunctFac, FullTimeFac) that have special attributes or that participate in relationships that other members of the same entity set do not have.

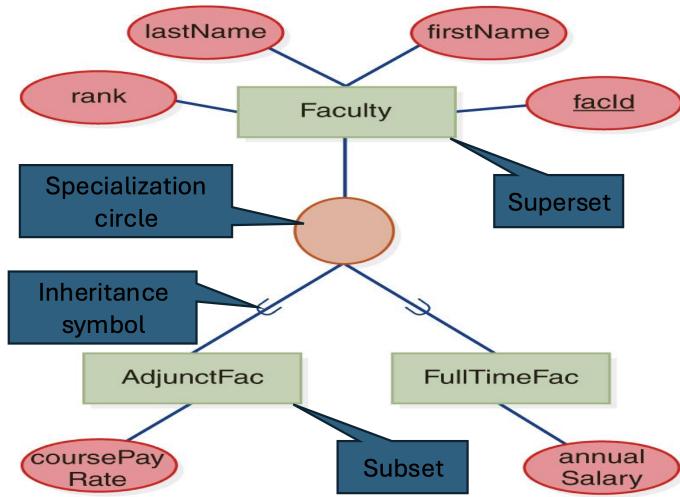


- The specialization circle is sometimes referred to as “is a relationship”.

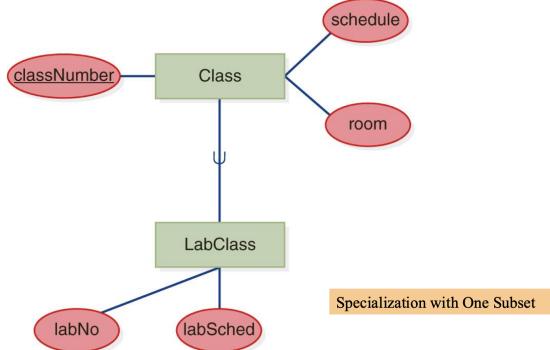


- Subsets may also participate in local relationships that do not apply to the supertype or to other subsets in the same hierarchy.
- For example, only full-time faculty members can subscribe to a pension plan.

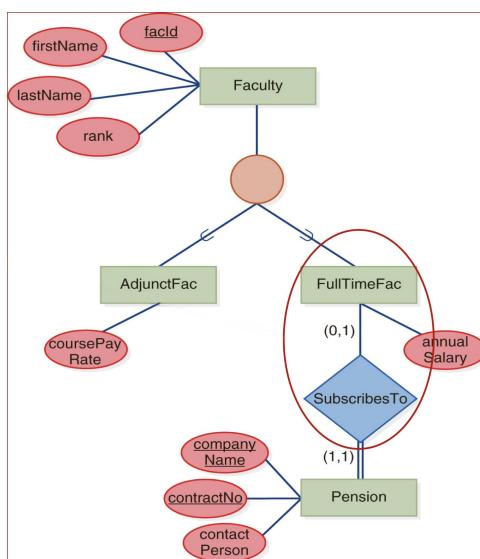


- Set hierarchies can also be created by recognizing that two or more sets have common properties and identifying a common superset for them, a process called generalization.

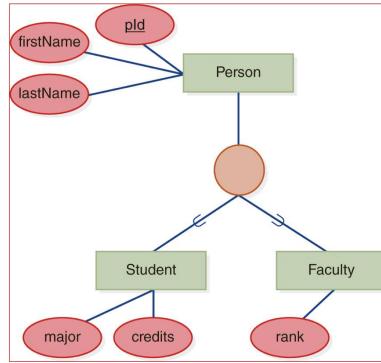


- Subsets can be overlapping, which means the same entity instance can belong to more than one of the subsets.
- Subsets can be disjoint, which means they have no common members. This is referred to as the disjointness constraint.
- This is expressed by placing an appropriate letter, d or o, in the specialization circle.

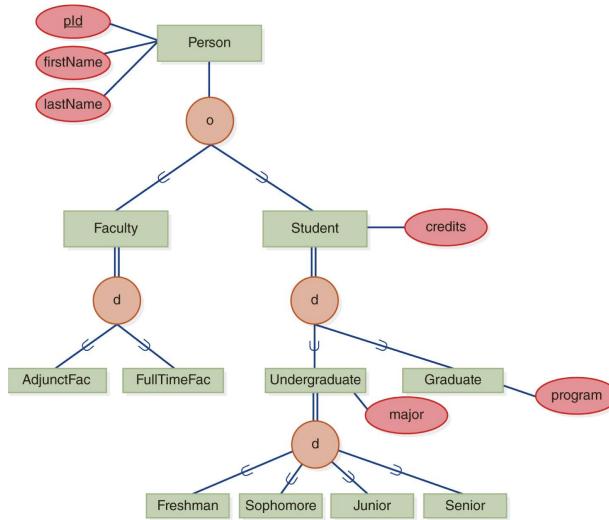

- A specialization also has a completeness constraint, which shows whether every member of the entity set must participate in it.
- If every member of the superset must belong to some subset, then the specialization is total.
- If some superset members can be permitted to not belong to any subset, the specialization is partial.
- For example, because every student must be either undergraduate or graduate, we have total specialization.

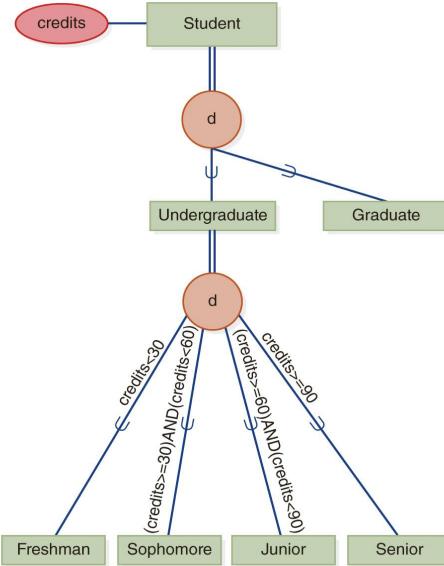


- In some specialization hierarchies, it is possible to identify the subset that the entity belongs to by examining a specific condition or predicate for each subset.
- This is called a predicate-defined specialization.
- In an EER diagram, we can write the defining predicate on the line from the specialization circle.
- Example: In the specialization of **Undergraduate**, if the predicate  $\text{credits} < 30$  is true, the student belongs to the **Freshman** subclass, while if the predicate  $\text{credits} \geq 30 \text{ AND } \text{credits} < 60$  is true, the student is a **Sophomore**, and so on.
- The specialization of an entity into subclass is based on the value of a specific attribute.
- A single attribute's value determines the subclass to which an entity belongs.

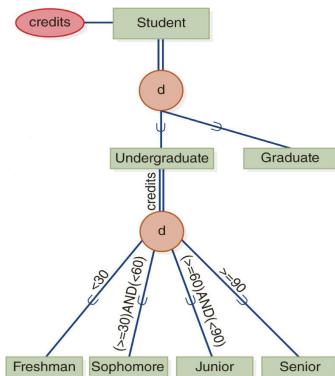


- Specialization that are not predicate-defined are said to be user-defined because the user is responsible for placing the entity instance in the correct set.
- In the previous example, the specialization of **Person** into **Faculty** and **Student**; **Faculty** into **AdjunctFac** and **FullTime**; and **Student** into **Undergraduate** and **Graduate** are all user-defined.
- A database designer could decide that it is important to specialize students by their residence status as well.
- The class year specialization and the residence specialization are independent of each other, and both can appear on the same diagram EER.

- The EER model allows us to give the same superset more than one specialization.

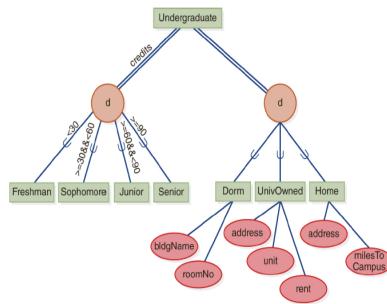


- Sometimes the entity set can be a subset of two or more supersets.
- Such a set is called a shared subset, and it has multiple inheritance from its supersets.
- Members of the **TeachingAssistant** subset inherit all the attributes of **Faculty** and of **Graduate**, and of the supersets of those sets, **Student Person**, in addition to having their own distinguishing attributes of **fundingSource** and **tuitionRemission**.

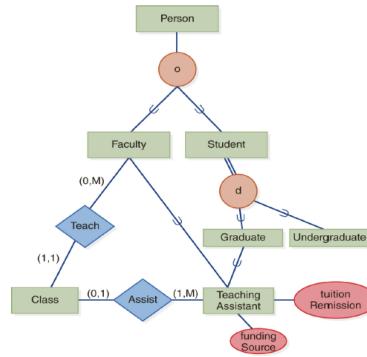


## Union

- Suppose we want to represent sponsors of campus-wide events, which can be sponsored by teams, departments, or clubs.
- If a campus-wide event must have exactly one sponsor, and it can be a team, a department, or a club, we can form a union of Team, Department, and Club, which is then the set of all of these entities.

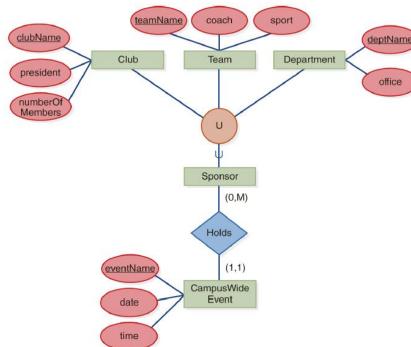


- Sponsor** is a subset of the union representing just one of the many roles that each of these entities might have.
- The attributes of a particular sponsor will depend on which type it is.


- The line connecting sponsor to its union circle is single, indicating a partial category.
- This means that not every Club, Team, or Department has to be a Sponsor.
- CampusWideEvent is a union of Concert or Fair.
- This indicates that every campus-wide event is either a concert or a fair.
- The line connecting CampusWideEvent to the union circle is double, indicating a total category, which means every Concert and Fair must be a member of CampusWideEvent.

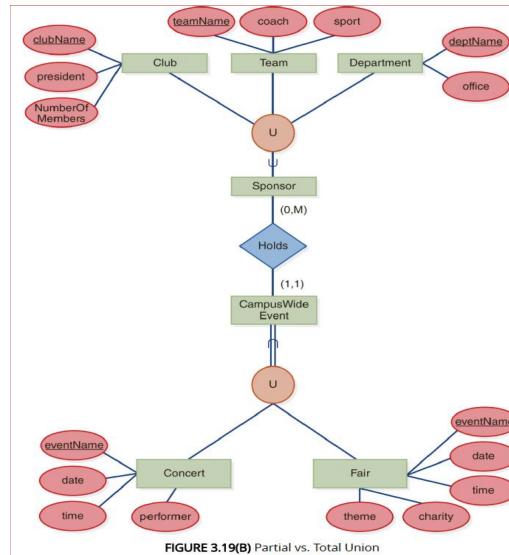

- If a union a total and the superclasses share many attributes, it be preferable to use specialization.
- The figure below shows a specialization of campus-wide events into two disjoint subsets, instead of using the union of concerts and fairs into campus-wide events.

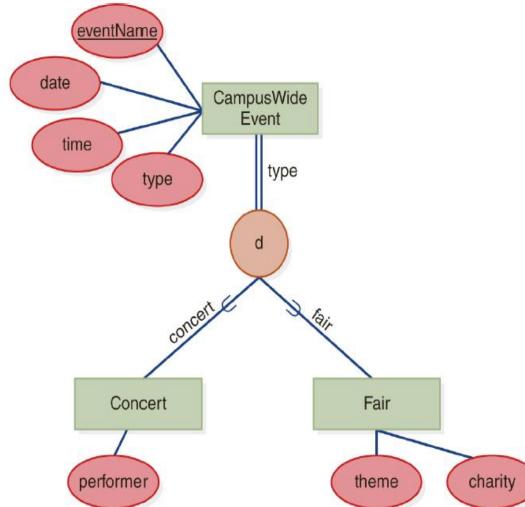

## Sample EER Diagram

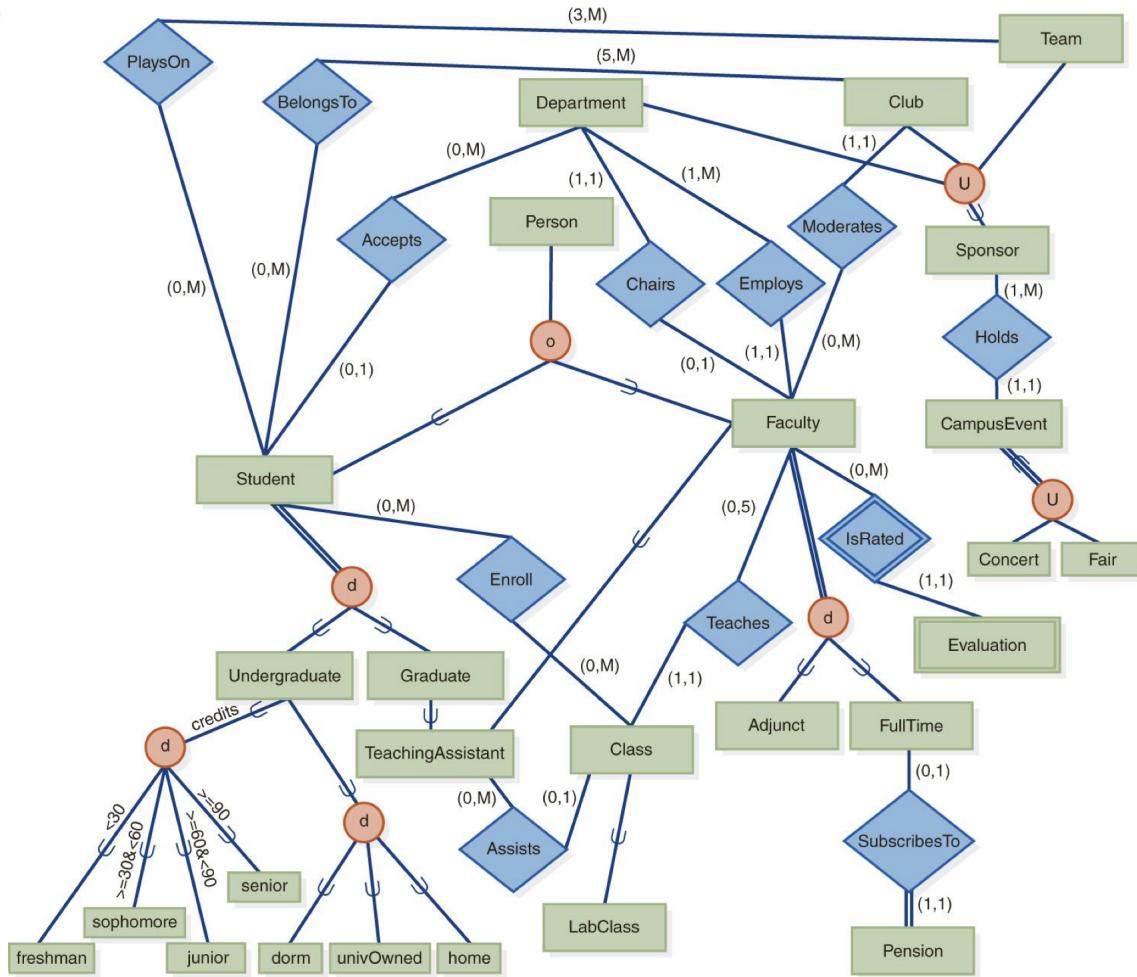

## Summary

- Extended Entity-Relationship (EER) Model
  - Enhances the ER model to represent complex relationships found in applications like GIS, search engines, and data mining.
  - Introduces new symbols in ER diagrams for abstraction and constraints.
- Generalization and Specialization
  - Specialization: A single entity set is divided into subsets with specific attributes or relationships.
    - \* Example: Faculty → AdjunctFaculty, FullTimeFaculty.
    - \* Uses a specialization circle (sometimes called an “is-a” relationships).
    - \* Constraints:
      - Disjoint (d): An entity belongs to only one subset.
      - Overlapping (o): An entity can belong to multiple subsets.
      - Total specialization: Every superset entity must belong to a subset.
      - Partial specialization: Some superset entities may not belong to any subset.
    - \* Predicate-defined specialization: Subsets are determined by attribute conditions.

- Students → Freshman (credits <30), Sophomore (credits 30-60).
- \* User-defined specialization: The user manually assigns entities to subsets.
- Generalization: Opposite of specialization; multiple entity sets are combined into a higher-level superset.
  - \* Example: AdjunctFaculty and FullTimeFaculty → Faculty.
- Multiple Specializations: An entity set can be specialized in more than one way.
  - \* Example: Students specialized by class year (Freshman, Sophomore) and residence status (On-campus, Off-campus).
- Shared Subsets (Multiple Inheritance): A subset can inherit attributes from multiple supersets.
  - \* Example: TeachingAssistant ⊂ Faculty and GraduateStudent (inherits attributes from both).
- Union (Category)
  - Combines multiple entity sets into a single higher-level set.
    - \* Example: Sponsor ⊂ (Team, Department, Club).
  - Partial category: Not every entity in the supersets has to be part of the union.
    - \* Example: Not every club, team, or department is a sponsor.
  - Total category: Every instance in the union must belong to the superset.
    - \* Example: CampusWideEvent ⊂ (Concert, Fair) (every event is either a concert or fair).
  - If supersets share many attributes, specialization is preferred over union.

# Lectures 10 - 12

## Outline

- Introduction to the Relational Model
- Translating ER Diagrams to Relational Schemas
- Integrity Constraints
- Case Studies for Schema Design
- Mapping an Extended Entity-Relationship (ER) Model to a Relational Schema
- EER to Relational Mapping Example

## Introduction to the Relational Model

- The relational model was invented by Edgar F. Codd in 1970.
- He introduced the concept in his seminal paper titled “A Relational Model of Data for Large Shared Data Banks”, published in the journal Communications of the ACM.
- Codd’s relational model revolutionized database management by providing a formal foundation based on mathematical principles (set theory and predicate logic), which became the basis for modern relational database systems.
- Relational Model: A way to represent data using tables (relations) consisting of rows (tuples) and columns (attributes).
- Relation: A table with unique rows.
- Attributes: Columns in a table, each with a domain of values.
- Tuple: A single row in a table.
- Schema: The structure of a table, including its name, attributes, and constraints.

## Relational Data Structures

- The data structures used in the relational model are tables with relationships among them.
- The relational model is based on the concept of a relation, which is physically represented as a table or two-dimensional array.
- Using the terms of the entity-relationship model, both entities and relationships are shown using tables.
- A column contains values of a single attribute; for example, the stuId column contains only the IDs of students.

- The domain of an attribute is the set of allowable values for that attribute.
- Each row of the table corresponds to an individual record or entity instance.
- In the relational model, each row is called a tuple.

**Attributes**

(A) The Student Table

<b>stuID</b>	<b>lastName</b>	<b>firstName</b>	<b>major</b>	<b>credits</b>
S1001	Smith	Tom	History	90
S1002	Chin	Ann	Math	36
S1005	Lee	Perry	History	3
S1010	Burns	Edward	Art	63
S1013	McCarthy	Owen	Math	0
S1015	Jones	Mary	Math	42
S1020	Rivera	Jane	CSC	15

- A table that represents a relation has the following characteristics:
  - Each cell of the table contains only one value.
  - Each column has a distinct name, which is the name of the attribute it represents.
  - The values in a column all come from the same domain because they are all values of the corresponding attribute.
  - Each tuple or row is distinct; there are no duplicate tuples.
  - The order of tuples or rows is immaterial.
- The structure of the table, together with a specification of the domains and any other restrictions on possible values, shows the intention of the relation, also called the relation schema.
- We can represent relation schemas by giving the name of the relation, followed by the attribute names in parentheses, as:
  - `Student(stuID, lastName, firstName, major, credits)`

## Translating ER Diagrams to Relational Schemas

- Mapping Entities:
  - For each entity in the ER diagram, create a table.
  - Include all simple attributes of the entity as columns.
  - Identify the primary key.
- Example:
  - Entity: Student with attributes StudentID, firstName, lastName, credits, major.
  - Table: `Student(StudentID, firstName, lastName, credits, major)`

## Degree and Cardinality

- The number of columns in a table is called the degree of the relation.
- The degree of a relation never changes unless the structure of the database is changed.
- By contrast, the number of rows in a table, called the cardinality of the relation, changes as new tuples are added or old ones are deleted.

stuId	lastName	firstName	major	credits
S1001	Smith	Tom	History	90
S1002	Chin	Ann	Math	36
S1005	Lee	Perry	History	3
S1010	Burns	Edwards	Art	63
S1013	McCarthy	Owen	Math	0
S1015	Jones	Mary	Math	42
S1020	Rivera	Jane	Comp. Sci.	15

The student table has a degree of 5, and a cardinality of 7.

## Relation Keys

- A superkey for a relation is an attribute or a set of attributes that uniquely identifies a tuple.
- A candidate key is a superkey such that no proper subset is a superkey.
- A primary key is the candidate key that is chosen to uniquely identify tuples.
- A foreign key is an attribute or combination of attributes of a relational that is the primary key of some relation.
- Foreign keys are very important in the relational model because they are used to represent logical connections between relations.
- The attribute departmentName, which is a primary key in the Department relation, is a foreign key in Employee.
  - Employee(empId, lastName, firstName, departmentName)
  - Department(departmentName, office)

facId	name	department	rank
F101	Adams	Art	Professor
F105	Tanaka	Comp. Sci.	Instructor
F110	Bryne	Math	Assistant
F115	Smith	History	Associate
F221	Smith	Comp. Sci.	Professor

classNumber	facId	schedule	room
ART103A	F101	MWF9	H221
CSC201A	F105	TuThF10	M110
CSC203A	F105	MThF12	M110
HST205A	F115	MWF11	H221
MTH101B	F110	MTuTh9	H225
MTH103C	F110	MWF11	H225

- Super key: {facId, name}, {classNumber, facId}
- Candidate key: {facId}, {classNumber}
- Primary key: {facId}, {classNumber}
- Foreign key: {facId}

## Integrity Constraints

- It is important to preserve the integrity of data in a database.
- The term integrity refers to the correctness and internal consistency of the data in the database, by now allowing users to enter data that would make the database incorrect.
- The relational model allows us to define integrity constraints (ICs), which are rules or restrictions that apply to all instances of the database.
- Part of the job of a database management system is to enforce the integrity constraints - to ensure that any data entered creates a legal instance of the database.
- The restrictions on the set of values allowed for attributes of relations are called domain constraints. Domain constraints can be enforced in SQL by defining the domain for an attribute when we create a table.
- An alternative is to use one of the built-in data types and to add a constraint called the CHECK option, which allows us to specify that the value of an attribute must obey a certain condition.

```
CREATE TABLE Students (
    StudentID INT PRIMARY KEY,      – Ensures unique identifier
    Name VARCHAR(50) NOT NULL,      – Name must be a non-null string
    Age INT CHECK (Age BETWEEN 18 AND 30), – Age must be between 18 and 30
    Email VARCHAR(100) UNIQUE,      – Ensures email is unique
    Gender CHAR(1) CHECK (Gender IN ('M', 'F')) – Only 'M' or 'F' allowed
    GPA DECIMAL(3,2) CHECK (GPA BETWEEN 0.00 AND 4.00) – GPA must be in range
);
```

- A primary key constraint, called entity integrity, states that in a relation no attribute of a primary key can have a null value.
- In SQL, we can identify the primary key using a primary key constraint when we create the table. The system will then enforce both the non-null and uniqueness constraints automatically.
- For candidate keys, most systems allow us to specify both a uniqueness constraint and a not null constraint.
- An integrity rule called referential integrity applies to foreign keys.
- Referential integrity states that, if a foreign key exists in a relation, then either the foreign key value must match the primary key value of some tuple in its home relation, or the foreign key value must be completely null.
- SQL allows us to specify foreign key constraints when we create a table.


```
CREATE TABLE Departments (
    DeptID INT PRIMARY KEY,      – Primary Key
    DeptName VARCHAR(50) NOT NULL, – Department Name
);
```

```
CREATE TABLE Students (
    StudentID INT PRIMARY KEY,      – Ensures unique identifier
    Name VARCHAR(50) NOT NULL,      – Name must be a non-null string
    Age INT CHECK (Age BETWEEN 18 AND 30), – Age must be between 18 and 30
    DeptID INT,                  – Foreign Key Reference
    FOREIGN KEY (DeptID) REFERENCES Departments(DeptID) – Foreign Key Constraint
);
```

- There are several other types of constraints, referred to as general constraints or semantic integrity constraints, which we will discuss later.

## Representing Relational Database Schemas

- A relational database schema can have any number of relations.
- We can represent relation schemas by giving the name of each relation, followed by the attribute names in parentheses, with the primary key underlined.
- The database schema also includes domains, views, character sets, constraints, stored procedures, authorizations, and other related information.

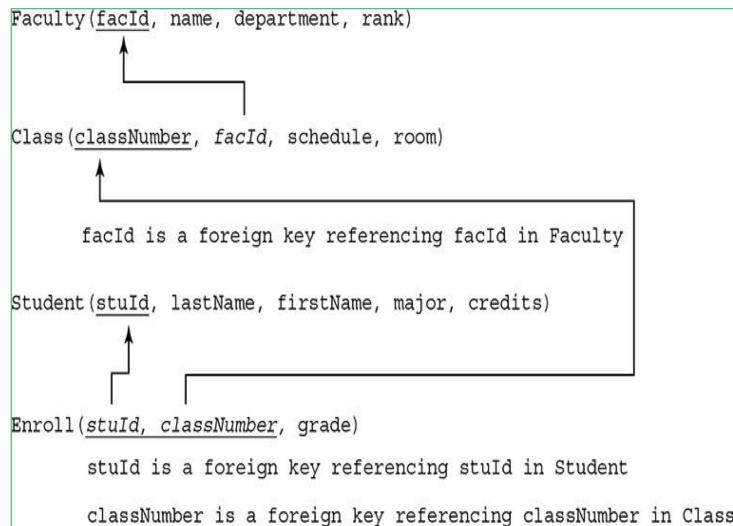

- The standard way of showing foreign keys is by drawing arrows from the foreign keys to the primary keys they refer to.
- We will also use italics to indicate that an attribute is a foreign key or part of a foreign key.


## Mapping an Entity-Relationship Model to a Relational Schema

- Both entities and relationships must be represented in the relational schema.
  - The strong entity sets shown as rectangles become relations represented by base tables.
    - \* The table name is the same as the entity name.
  - For strong entity sets, non-composite, single-valued attributes, represented by simple ovals, become attributes of the relation, or column headings of the table.
    - \* Department(deptName, deptCode, office)
    - \* Student(stuId, lastName, firstName, credits)
    - \* Faculty(facId, lastName, firstName, rank)
  - For ER attributes that are composites, we can make a column for each of the simple attributes that form the composite, or we can choose to leave the composite as a single attribute.
    - \* For example, if we had a composite attribute called Address that consisted of street, city, state, zipCode, we could choose to make columns for each of these attributes, or we could keep the entire address as a single column, Address.
    - \* The first choice would make it easier to select rows with a certain city or state.
    - \* In the university example, classNumber is a composite consisting of deptCode, courseNumber, and section.
    - \* We could use the first method, showing each of the sub-attributes, as:
      - Class1(deptCode, courseNumber, section, schedule, room)

- \* Or we can choose to leave the composite as a single attribute. Therefore, we form the Class table as:
  - Class(classNumber, schedule, room)
- Multi-valued attributes pose a special problem when converting to a pure relational model, which does not allow multiple values in a cell.
  - \* The solution is to remove them from the table and create a separate relation (table) in which we put the primary key of the entity along with the multi-valued attribute.
  - \* Ex: If the attribute author can have multiple values
    - Textbook(isbn, title, publisher)
    - TextAuthors(isbn, author)
  - \* The key of this new table becomes the foreign keys of the original table and the multi-valued attribute. The key of the original table becomes a foreign key in the new table.
  - \* If there are several multi-valued attributes in the original table, we must create a new table for each one.
  - \* It is convenient to name the new table(s) using the plural form of the multi-valued attribute name.
- Weak entity sets are also represented by tables, but they require additional attributes.
  - \* A weak entity is dependent on another (owner) entity and has no primary key consisting of just its own attributes.
  - \* We use the combination of the owner's primary key and the discriminant as the primary key of the weak entity.
  - \* For example, the weak entity Evaluation, is given the primary key of its owner entity, Faculty, resulting in the table.
    - Evaluation(facId, date, rater, rating)
- If A and B are strong entity sets and have a binary relationship that is one-to-many, we place the key of A (the one side) in the table for B (the many side), where it becomes a foreign key.
  - \* Teach is a one-to-many relationship sets connecting the strong entity sets Faculty and Class.
  - \* We use a foreign key to represent this relationship, by placing facId, the key of the “one” side, Faculty, in the table for the “many” side, Class.
    - Class(classNumber, schedule, room, *facId*)
  - \* If we had tried to represent the relationship Teach in the opposite way, by placing the classNumber in the Faculty table, it would not work.
  - \* Because a faculty member teach many courses, a row in the Faculty table would need several values in the classNumber cell, which is not allowed.
- All strong entity sets that have a one-to-one relationship should be examined carefully to determine whether they are the same entity. If they are, their attributes should be combined into a single entity.
  - \* If A and B are truly separate entities having a one-to-one relationship, then we can put the key of either relation in the other table to show the connection (i.e., either put the key of A in the B table, or vice versa, but not both).
  - \* Ex: Let us assume students can have parking permit to park one car on campus. We could add a Car entity, which would have a one-to-one relationship with Student. Each car belongs to exactly one student and each student can have at most one car. The initial schema for Car might be:
    - Car(permitNumber, licNo, make, model, year, color)
    - To store the one-to-one relationship with Student, we could put stuID in the Car table.
    - Car(permitNumber, licNo, make, model, year, color *stuId*)
    - Alternatively, we could add permitNumber to the Student table - but not both.

- For a binary relationship, the only time that we cannot use a foreign key to represent the relationship set is the many-to-many case.
  - \* Here, the connection must be shown by a separate relationship table.
  - \* Ex: The Enroll relationship is a many-to-many relationship. The table that represents it must contain the primary keys of the associated Student and Class entities, stuId and classNo, respectively. Because the relationship also has a descriptive attribute, grade, we include that as well.
  - \* The relationship table is:
    - Enroll(stuId, classNumber, grade)
- When we have ternary or n-ary relationship involving three or more entity sets, we can construct a table for the relationship, in which we place the primary keys of the related entities.
  - \* If the ternary or n-ary relationship has a descriptive attribute, it goes in the relationship table.
  - \* Ex: The ternary relationship, Course-Faculty-Textbook we could represent it by the table:
    - Course-Faculty-Textbook(facId, courseNo, isbn)
  - \* We would choose the combination of courseNo and facId as the primary key.
- A recursive relationship representation depends on the cardinality.
  - \* If the cardinality is many-to-many, we must create a relationship table.
  - \* If it is one-to-one or one-to-many, the foreign key mechanism can be used.
  - \* For example, if we wanted to represent a one-to-one Roommate relationship and we assume each student can have at most one roommate, we could represent the one-to-one recursive relationship by adding an attribute, roommateStuId, to the Student table, where it would be a foreign key, as in:
    - Student3(stuId, lastName, firstName, major, credits, *roommateStuId*)
- For entity sets and relationships that are not part of generalizations or unions, the mapping proceeds as for the ER model.
  - Map strong entity sets to tables having a column for each single-valued, non-composite attribute.
  - For composite attributes, create a column for each component and do not represent the composite. Alternatively, create a single column for the composite and ignore the components.
  - For each multi-valued attribute, create a separate table having the primary key of the entity, along with a column for the multi-valued attribute. Alternatively, if the maximum number of values for the attribute is known, create multiple columns for these values.
  - For each weak entity set, create a table that includes the primary key of the owner entity along with the attributes of the weak entity set.
  - For one-to-many binary relationships, place the primary key of the one side in the table of the many side, creating foreign key.
  - For one-to-one binary relationships, place either one of the primary keys in the table for the other entity.
  - For many-to-many binary relationships, and for all higher-level relationships, create a relationship table that consists of the primary keys of the related entities, along with any descriptive attributes of the relationship.
- HasMajor relationship
  - To represent the 1:M HasMajor relationship connecting Department to Student, we place the primary key of the “one” side, Department, in the table for the “many” side, Student, changing its name to major.
  - Recall the value of major is the same as deptName in Department.

- We cannot do the opposite, placing the stuId in the Department table, because a department has many student majors and we cannot have an attribute with multiple values.
  - Student(stuId, lastName, firstName, credits, major)
- Teach relationship
  - Teach is a one-to-many relationship that connects Faculty to Class. As discussed, we represent this relationship by placing facId as a foreign key in Class.
- Offers relationship
  - Offers is a one-to-many relationship that connects Department to Class. We represent this relationship by putting the key of Department, deptName, in the Class table, changing it to:
    - \* Class(classNumber, schedule, room, *facId*, *deptName*)
- Employ relationship
  - Employ is a one-to-many relationship that represents the association between Department and Faculty. We use the foreign key mechanism, adding deptName as an attribute in the Faculty table, making that table.
    - \* Faculty(facId, lastName, firstName, rank, *deptName*)
- Chairs relationship
  - Chairs is a one-to-one relationship that connects Department to Faculty. We will push the primary key of Faculty into Department as a foreign key, changing its name slightly for clarity, making the Department schema.
- isRated relationship
  - The isRated relationship connects the weak entity Evaluation to its owner, Faculty.
  - It is already represented by having the primary key of the owner entity in the weak entity's table as part of its primary key.
- Relational Schema for University:

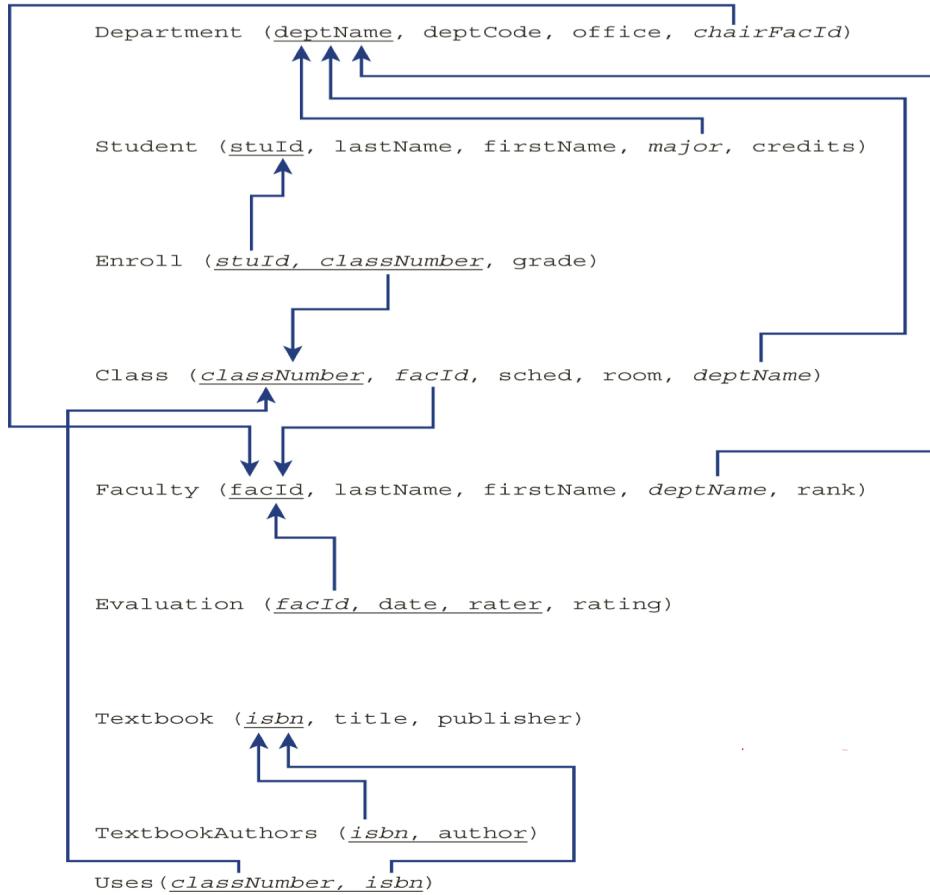

- The techniques discussed previously for mapping an ER model to a relational model apply to the EER model, but they must be extended to take into account the additional features of the EER mode, namely specialization / generalization and union.
- Mapping EER Set Hierarchies to Relational Tables
  - Method 1: Create a table for the superset and one for each of the subsets, placing the primary key of the superset in each subset table.
    - \* We create three tables, Faculty, AdjunctFac, and FullTimeFac.
    - \* Both AdjunctFac and FullTimeFac tables have columns for their own attributes, plus columns for the primary key of the superset, facId, which functions both as the primary key and a foreign key in those tables.
    - \* Faculty(facId, lastName, firstName, rank)
    - \* AdjunctFac(facId, coursePayRate)
    - \* FullTimeFac(facId, annualSalary)
  - Method 2: Create tables for each of the subsets and no table for the subset. Place all of the attributes of the superset in each of the subset tables.
    - \* For this example, we would have tables for AdjunctFac and FullTimeFac, and none for Faculty.
    - \* AdjunctFac(facId, lastName, firstName, rank, coursePayRate)
    - \* FullTimeFac(facId, lastName, firstName, rank, annualSalary)
  - Method 3: Create a single table that contains all the attributes of the superset, along with the attributes of all subsets.
    - \* For our example, we could create the table:

- \* AllFac(facID, lastName, rank, annualSalary, coursePayRate)
- A variation of Method 3 is to add a “type field” to the record, indicating to which subset the entity belongs. For attribute-defined disjoint specializations, this is simply the defining attribute. For overlapping specializations, we could add a type field for each specialization, indicating whether the entity belongs to each of the subsets.
- There are trade-offs to be considered for each of these methods.
  - \* The first works for all types of subsets, regardless of whether the specialization is disjoint or overlapping; partial or total; and attribute-defined or user-defined.
  - \* The second method handles queries about the subsets well because one table has all the information about each subset. However, it should not be used if the subsets are overlapping because data about the instances that belong to more than one subset will be duplicated. It cannot be used if the specialization is partial because the entity instances that do not belong to any subset cannot be represented at all using this method.
  - \* The third method allows us to answer queries about all the subsets and the superset without doing joins, but it will result in storing many null values in the database.
- Mapping Unions
  - To represent unions (categories), we create a table for the union and individual tables for each of the supersets, using foreign keys to connect them.
  - A problem that often arises with mapping unions is that the supersets can have different primary keys.
  - The solution is to create a surrogate key that will be the primary key of the union. It will be a foreign key in the tables for each of the supersets.
  - For the Sponsor example, we create a surrogate key for Sponsor, which we call sponsorId, and we insert that attribute as a foreign key in the tables for Club, Team, and Department.
  - We also add SponsorType to indicate whether the sponsor is a club, team or department.
    - \* Sponsor(sponsorId, sponsorType)
    - \* Club(clubName, president, numberOfMembers, *sponsorId*)
    - \* Team(teamName, coach, sport, *sponsorId*)
    - \* Department(deptName, office, *sponsorId*)
  - If the primary keys of the supersets are the same, it is not necessary to create a surrogate key.
  - For the CampusWideEvent example, the schema will be:
    - \* CampusWideEvent(eventName, eventType)
    - \* Concert(eventName, date, time, performer)
    - \* Fair(eventName, date, time, theme, charity)

## EER to Relational Mapping Example

- We have a hierarchy for Person, with subsets Student and Faculty, each of which itself has subsets.
- Our first decision is not to represent the Person superset because it does not participate as a whole in any relationships.
- We create separate tables for Student and Faculty, repeating the common Person attributes in each, which is Method 2.
  - Faculty(facId, lastName, firstName, rank)
  - Student(stuId, lastName, firstName, credits)
- Create tables for both undergraduate and graduate students, which is Method 1.

- We change the name of the stuId field slightly to reduce confusion.
  - Undergraduate(undergradStuId, major)
  - Graduate(gradStuId, program)
  - Faculty(facId, lastName, firstName, rank)
  - AdjunctFac(adjFacId, coursePayRate)
  - FullTimeFac(fullFacId, annualSalary)
- The Undergraduate subset has subsets for class years and for residences, but the one for class years is attribute-defined.
- It does not seem necessary to break up the Undergraduate table by class year. If we need to record any attributes specific to a class year, such as a thesis advisor for seniors, we add those to the Undergraduate table.
- Similarly, for residence, the residence type and address might be sufficient, so we use Method 3 and we change the undergraduate table to be:
  - Undergraduate(undergradStuId, major, thesisAdvisor, resType, address)
- Graduate has a single subset, TeachingAssistant, and we decide to represent that specialization using Method 3, by adding its two attributes to the Graduate table, changing the table to:
  - Graduate(gradStuId, program, tuitionRemission, fundingSource)
- The diagram shows that TeachingAssistant is also a subclass of Faculty, so we put facId in as an attribute for those graduate students who are TAs.
  - Graduate(gradStuId, program, tuitionRemission, fundingSource, facId)

## Summary

- Representing Relational Database Schemas
  - A relational database schema consists of multiple relations, defined by their names and attributes.
  - Primary keys are underlined, while foreign keys are italicized.
  - Other schema elements include domains, views, constraints, stored procedures, and authorizations.
  - Foreign keys are visually represented using arrows pointing to the corresponding primary keys.
- Mapping ER Models to Relational Schemas
  - Entities → Tables: Strong entity sets become base tables, with attributes forming columns.
  - Composite Attributes: Can be broken into separate columns or kept as a single column.
  - Multi-Valued Attributes: Require a separate table containing the entity's primary key and the multi-valued attribute.
  - Weak Entities: Represented using a table with the owner's primary key included as part of its primary key.
  - One-to-Many Relationships: The primary key of the “one” side is placed in the table for the “many” side.
  - One-to-One Relationships: A foreign key is added to either of the entity tables.
  - Many-to-Many Relationships: A separate relationship table is created using the primary keys of both entities.
  - Ternary and N-ary Relationships: Require a separate table containing the primary keys of related entities.

- Recursive Relationships: One-to-many and one-to-one relationships can use foreign keys, while many-to-many requires a separate table.
- Mapping EER to Relational Schemas
  - Specialization / Generalization
    - \* Create a table for the superset and separate tables for each subset (foreign key points to superset).
    - \* Create only subset tables, repeating superset attributes.
    - \* Create a single table including attributes from all subsets, often resulting in NULL values for unused attributes.
  - Union (Category) Representation
    - \* Create a table for the union and separate tables for each superset, using foreign keys to link them.
    - \* If supersets have different primary keys, introduce a surrogate key.

# Lecture 13


## Outline

- The Purpose of Normalization
- How Normalization Supports Database Design
- Data Redundancy and Update Anomalies
- Functional Dependencies
- The Process of Normalization
- Normal Forms

## The Purpose of Normalization

- What is Normalization?
  - Normalization is a process in database design that organizes data to reduce redundancy and improve data integrity.
  - Normalization is based on examining the relationships (called functional dependencies) between attributes.
  - Normalization uses a series of tests (described as normal forms) to help identify the optimal grouping for these attributes.
- Normalization serves several important purposes in database design:
  - Eliminates Data Redundancy: Reduces unnecessary duplication of data, saving storage space and improving efficiency.
  - Ensures Data Integrity and Consistency: Prevents anomalies that can occur when inserting, updating, or deleting records.
  - Improves Query Performance: Organized data allows for faster and more efficient data retrieval.
  - Simplifies Data Maintenance: Reduces errors and inconsistencies when modifying data.
  - Supports Scalability: A well-normalized database can handle growth and complex queries more effectively.

# How Normalization Supports Database Design

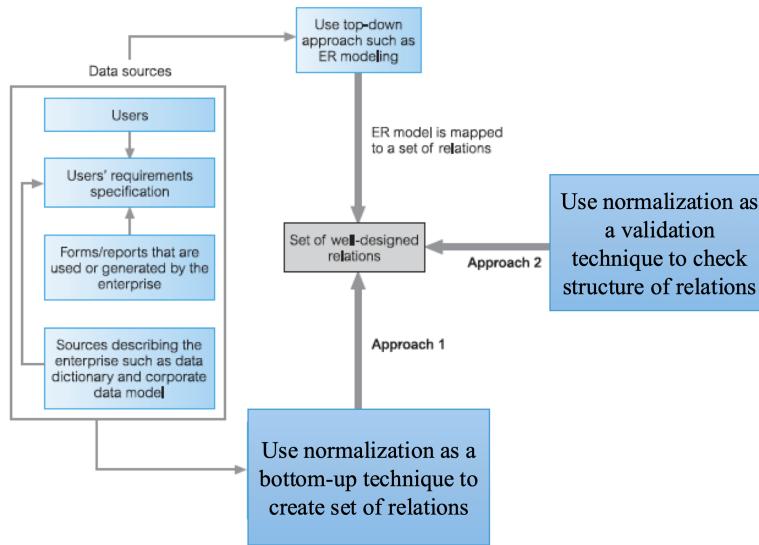

- How They Work Together (Approach #2)
  - Start with an ER Diagram (Conceptual Model)
  - Map the ER Model to a Relational Schema (Logical Model)
  - Apply Normalization (Schema Refinement)

Aspect	ER Diagram	Mapping to a Relational Model	Normalization
Purpose	Conceptually represents entities, attributes, and relationships.	Convert the ER model into a relational schema with tables, primary keys, and foreign keys.	Refines the relational schema to reduce redundancy and ensure data integrity.
Focus	Focuses on high-level relationships between data entities.	Focuses on converting conceptual entities into tables with relationships and constraints.	Focuses on structural optimization of tables to remove anomalies.
Methodology	Identifies entities, attributes, and relationships. Defines cardinality (1:1, 1:N, M:N).	Entities → Tables, Attributes → Columns, Relationships → Foreign keys, Weak entities → Tables with composite keys, M:N relationships → Separate tables.	Applies 1NF, 2NF, 3NF, BCNF to remove redundancy and anomalies. Uses functional dependencies to ensure consistency.
Outcome	Produces an ER diagram showing data structure and relationships.	Produces an initial relational schema with primary keys, foreign keys, and constraints.	Produces a normalized schema with improved consistency and efficiency.

## Data Redundancy and Update Anomalies

- The problems associated with unwanted data redundancy.
  - Staff(staffNo, sName, position, salary, branchNo)
  - Branch(branchNo, bAddress)
  - StaffBranch(staffNo, sName, position, salary, branchNo, bAddress)

- Staff:

staffNo	sName	position	salary	branchNo
SL21	John White	Manager	30000	B005
SG37	Ann Beech	Assistant	12000	B003
SG14	David Ford	Supervisor	18000	B003
SA9	Mary Howe	Assistant	9000	B007
SG5	Susan Brand	Manager	24000	B003
SL41	Julie Lee	Assistant	9000	B005

- **Branch:**

branchNo	bAddress
B005	22 Deer Rd, London
B007	16 Argyll St, Aberdeen
B003	163 Main St, Glasgow

- **StaffBranch:**

staffNo	sName	position	salary	branchNo	bAddress
SL21	John White	Manager	30000	B005	22 Deer Rd, London
SG37	Ann Beech	Assistant	12000	B003	163 Main St, Glasgow
SG14	David Ford	Supervisor	18000	B003	163 Main St, Glasgow
SA9	Mary Howe	Assistant	9000	B007	16 Argyll St, Aberdeen
SG5	Susan Brand	Manager	24000	B003	163 Main St, Glasgow
SL41	Julie Lee	Assistant	9000	B005	22 Deer Rd, London

- Which design is better, using two tables (Staff, Branch) or one table (StaffBranch)?
  - In the StaffBranch relation there is redundant data; the details of a branch are repeated for every member of staff located at that branch.
  - In the branch details appear only once for each branch in the Branch relation, and only the branch number (branchNo) is repeated in the Staff relation to represent where each member of staff is located.
- Relations that have redundant data may have problems called update anomalies, which are classified as:
  - insertion,
  - deletion, or
  - modification.

## Insertion Anomalies

- To insert the details of new members of staff into the StaffBranch relation, we must include the details of the branch (branchNo, bAddress) at which the staff are to be located. What if we entered a wrong address?
- We cannot enter a tuple of a new branch into the StaffBranch relation with a null for the staffNo.

## Deletion Anomalies


- If we delete the tuple for staff number SA9 (Mary Howe) from the StaffBranch relation, what will happen to branch B007 data?

## Modification Anomalies

- If we want to change the value of one of the attributes of a particular branch in the StaffBranch relation – for example, the address for branch number B003 – we must update the tuples of all staff located at that branch.

## Functional Dependencies

- An important concept associated with normalization is functional dependency.
- A functional dependency (FD) is a constraint between two sets of attributes in a relational database. It expresses a relationship where the value of one attribute (or a group of attributes) uniquely determines the value of another attribute.

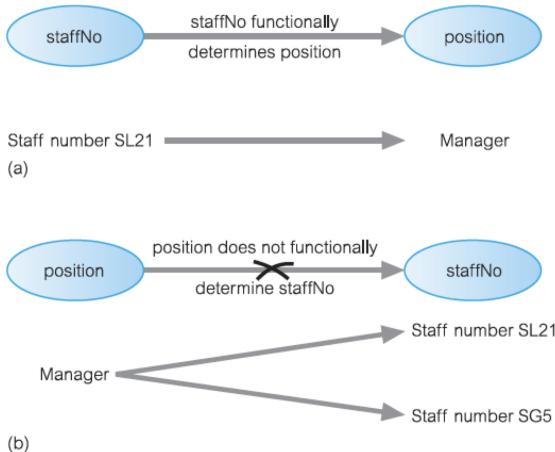

- If A and B are attributes of relation R, B is functionally dependent on A (denoted  $A \rightarrow B$ ), if each value of A is associated with exactly one value of B. (A and B may each consist of one or more attributes.)
- A functional dependency  $A \rightarrow B$  is a full functional dependency if removal of any attribute from A results in the dependency no longer existing.
- A functional dependency  $A \rightarrow B$  is a partial dependency if there is some attribute that can be removed from A and yet the dependency still holds.
  - Example: staffNo, sName  $\rightarrow$  branchNo
  - This is a partial dependency, because branchNo is also functionally dependent on a subset of (staffNo, sName), namely staffNo.
- Transitive Dependency: A condition where A, B, and C are attributes of a relation such that if  $A \rightarrow B$  and  $B \rightarrow C$ , then C is transitively dependent on A via B (provided that A is not functionally dependent on B or C).
  - Example: staffNo  $\rightarrow$  sName, position, salary, branchNo, bAddress
  - branchNo  $\rightarrow$  bAddress
  - The staffNo attribute functionally determines the bAddress via the branchNo attribute and neither branchNo nor bAddress functionally determines staffNo.
- Identifying Functional Dependencies
  - Use the meaning of each attribute and the relationships between the attributes, or, use sample data if available that is a true representation of all possible data values that the database may hold.
  - Example: We begin by examining the semantics of the attributes in the StaffBranch relation.
  - For the purposes of discussion, we assume that the position held and the branch determine a member of staff's salary.
  - We identify the functional dependencies based on our understanding of the attributes in the relation as:

- staffNo  $\xrightarrow{R}$  sName, position, salary, branchNo, bAddress
- branchNo  $\xrightarrow{R}$  bAddress
- bAddress  $\xrightarrow{R}$  branchNo
- branchNo, position  $\xrightarrow{R}$  salary
- bAddress, position  $\xrightarrow{R}$  salary

## Summary

- Purpose of Normalization
  - Normalization is a process in database design that organizes data to:
    - \* Eliminate redundancy and save storage space.
    - \* Ensure data integrity and consistency by preventing anomalies.
    - \* Improve query performance for efficient data retrieval.
    - \* Simplify data maintenance and reduce errors.
    - \* Support scalability for handling growth and complex queries.
- How Normalization Supports Database Design
  - ER Diagram (Conceptual Model) → Defines entities, attributes, and relationships.
  - Relational Schema (Logical Model) → Converts entities into tables with primary and foreign keys.
  - Normalization (Schema Refinement) → Reduces redundancy and ensures integrity through normal forms.
- Data Redundancy and Update Anomalies
  - Redundancy Issue: Storing staff and branch details in a single table leads to duplication.
  - Better Design: Splitting data into separate Staff and Branch tables reduces redundancy.
  - Update Anomalies:
    - \* Insertion: New branches cannot be added without staff.
    - \* Deletion: Removing a staff record may delete branch data.
    - \* Modification: Changing branch details requires updating multiple rows.
- Functional Dependencies
  - Definition: A constraint where one attribute uniquely determines another (e.g., staffNo  $\rightarrow$  sName).
  - Types:
    - \* Full Dependency: Removing an attribute breaks the dependency.
    - \* Partial Dependency: A subset of attributes still maintains the dependency.
    - \* Transitive Dependency: A determines B, and B determines C, leading to an indirect dependency.