

TURNSTILE REQUIREMENTS

Prepared by: GE GRC
Niskayuna, NY
USA

Version: 1.0

Copyright (c) 2021, General Electric Company, Inc.
All Rights Reserved


This material is based upon work supported by the Defense Advanced Research Projects Agency (DARPA) under Contract No. FA8750-20-C-0203. Any opinions, findings and conclusions or recommendations expressed in this material are those of the author(s) and do not necessarily reflect the views of the Defense Advanced Research Projects Agency (DARPA).

Revision History

| REQUIREMENT | REV DATE | DESCRIPTION | RELEASE DATE | RELEASE APPROVER |
|-------------|-------------|-------------|-----------------|---------------------|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

1. INTRODUCTION


The Turnstile example is similar to something you may see at a park security gate. It consists of an In Gate, an Out Gate, a Counter Application, and a Display.

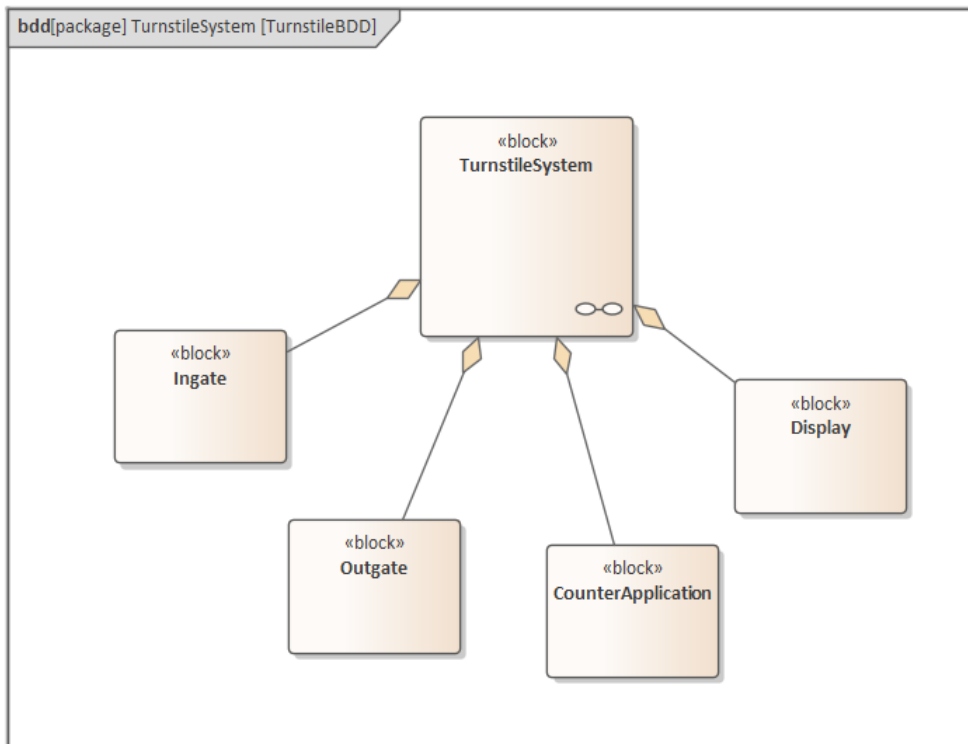

This block definition diagram shows the basic components of the Turnstile System:

- Ingate is the physical gate that is used to meter the flow of people into the venue
- Outgate is the physical gate that counts the flow of people leaving the venue

- CounterApplication is the software that manages the running census
- Display is a simple display to show the count of people in the venue

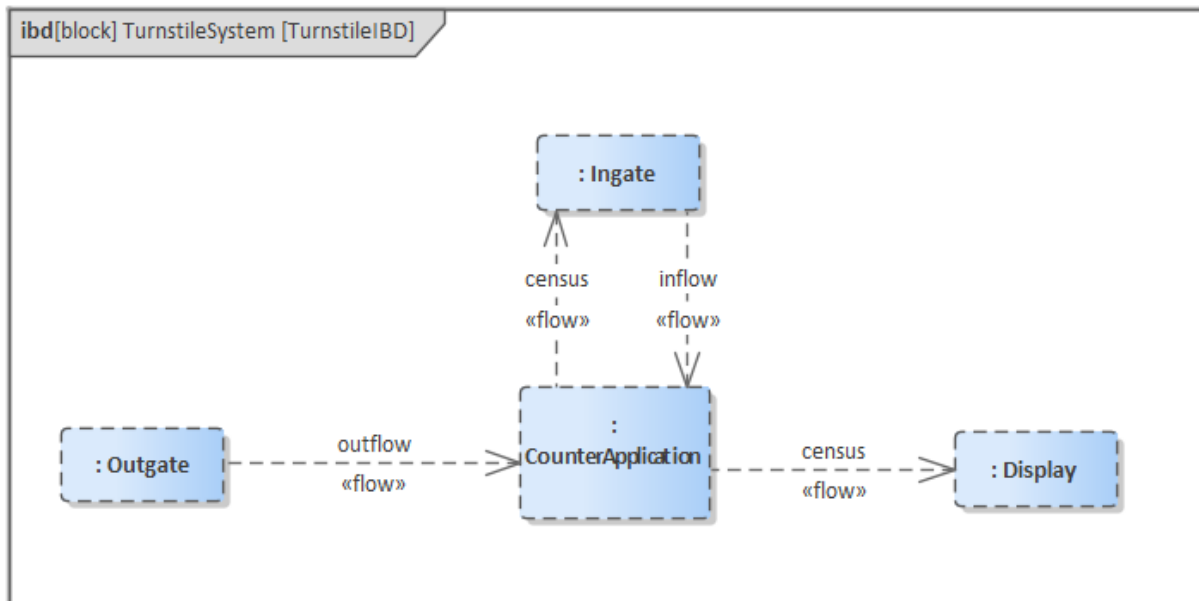

The Turnstile Example provides various example requirements. System Level, High-level Software and Low-Level Software requirements are all represented in the example. In addition, Data Dictionary Terms are included to provide relationships between requirements at a given level. Examples of tracing to higher level requirement are included. Development activities are identified along with the Agents that performed the activities.

2. SYSTEM REQUIREMENTS

- 1) Requirement identification: Sys-1
 - a. Description: Turnstile system shall track the number of people that travel through the in gate.
 - b. Governs: Turnstile
- 2) Requirement identification: Sys-2
 - a. Description: Turnstile system shall track the number of people that travel through the out gate.
 - b. Governs: Turnstile
- 3) Requirement identification: Sys-3
 - a. Description: Turnstile system shall track the number of people that are currently in the park.
 - b. Governs: Turnstile

3. HIGH LEVEL REQUIREMENTS

- 1) Requirement identification: HLR-1
 - a. Description: The Computer shall increment the counter when a inflow event is received and the counter is less than 1000.
 - b. Satisfies : Sys-1
 - c. Mitigates: H-1.2
 - d. Governs : CounterApplication
 - e. Created by : HlrDev1
- 2) Requirement identification: HLR-2
 - a. Description: The Computer shall decrement the counter when a outflow event is received and the counter is greater than 0.
 - b. Satisfies: Sys-2
 - c. Mitigates :H-1.1
 - d. Governs : CounterApplication
 - e. Created by : HlrDev1
- 3) Requirement identification: HLR-3
 - a. Description: The Computer shall publish the counter at a 1 htz rate.
 - b. Satisfies: Sys-3
 - c. Governs : CounterApplication
 - d. Created by : HlrDev1

4. LOW LEVEL REQUIREMENTS

- 1) Requirement identification: EXE-LLR-1
 - a. Description: Executive shall spawn Input Thread on powerup.
 - b. Governs: ExecutiveThread
 - c. Created by: LlrDev1
- 2) Requirement identification: EXE-LLR-2
 - a. Description: Executive shall spawn Output Thread on powerup.
 - b. Governs: ExecutiveThread
 - c. Created by: LlrDev1
- 3) Requirement identification: EXE-LLR-3
 - a. Description: Executive shall print a single '.' character to the console every second when running.
 - b. Governs: ExecutiveThread
 - c. Created by : LlrDev1
- 4) Requirement identification: IN-LLR-1
 - a. Description : Input Thread shall initialize the park count to 0 on powerup.
 - b. Governs: InputThread
 - c. Created by: LlrDev1
- 5) Requirement identification: IN-LLR-2
 - a. Description: Input Thread shall check for a incoming UDP message on port 62000.
 - b. Created by : LlrDev1
 - c. Governs : InputThread

- d. Satisfies: HLR-1, HLR-2
- 6) Requirement identification: IN-LLR-3
 - a. Description : Input Thread shall add the delta value received by the UDP to the park count and send the updated park count to the Output Thread when a valid UDP message is received, and the park count range is not exceed.
 - b. Governs: InputThread
 - c. Satisfies: HLR-1, HLR-2
 - d. Created by: LlrDev1
- 7) Requirement identification: IN-LLR-4
 - a. Description : Input Thread shall limit park count to between 0 and 1500.
 - b. Governs: InputThread
 - c. Created by: LlrDev1
- 8) Requirement identification: IN-LLR-5
 - a. Description : Input Thread shall print 'Invalid Message' to the console when a invalid UDP message is received.
 - b. Governs: InputThread
 - c. Created by: LlrDev1
- 9) Requirement identification: IN-LLR-6
 - a. Description : Input Thread shall print 'Limit Exceeded' to the console when a valid UDP message is received, and the park count range is exceed.
 - b. Governs: InputThread
 - c. Created by: LlrDev1
- 10) Requirement identification: OUT-LLR-1
 - a. Description : Output Thread shall initialize the park count to 0 on powerup.
 - b. Governs: OutputThread
 - c. Created by: LlrDev1
- 11) Requirement identification: OUT-LLR-2
 - a. Description : Output Thread shall broadcast a UDP message on port 62001 with the park count every second.
 - b. Satisfies : HLR-3
 - c. Governs: InputThread
 - d. Created by: LlrDev1

