

Titel der Transferarbeit

Autoren

Transferarbeit an der Hochschule Luzern – Informatik

Titel:

Teilnehmerin/Teilnehmer:

Teilnehmerin/Teilnehmer:

Programm: CAS Software Architecture

Zeitraum:

Programmleitung: Prof. Dr. habil. Jana Koehler, Dr. Stefan Bischoff

Betreuung/Referat:

Codierung / Klassifizierung der Arbeit:

☒ Öffentlich (Normalfall)

☐ Vertraulich

Eidesstattliche Erklärung

Ich erkläre hiermit, dass ich/wir die vorliegende Arbeit selbständig und ohne unerlaubte fremde Hilfe angefertigt haben, alle verwendeten Quellen, Literatur und andere Hilfsmittel angegeben haben, wörtlich oder inhaltlich entnommene Stellen als solche kenntlich gemacht haben, das Vertraulichkeitsinteresse des Auftraggebers wahren und die Urheberrechtsbestimmungen der Hochschule Luzern respektieren werden.

Ort / Datum, Unterschrift _____

Ort / Datum, Unterschrift _____

Geistiges Eigentum gemäss der [Studienordnung](#) für die Ausbildung an der Hochschule Luzern, FH Zentralschweiz

Contents

1	Introduction and Goals	4
1.1	Functional Requirements	4
1.2	Quality Goals	4
1.3	Stakeholders	5
2	Architecture Constraints	6
3	Context and Scope	6
3.1	Business Context	6
3.2	Technical Context	7
4	Solution Strategy	7
5	Building Block View	8
5.1	Whitebox Overall System	9
5.1.1	<Name black box 1>	10
5.1.2	<Name black box 2>	11
5.1.3	<Name black box n>	11
5.1.4	<Name interface 1>	11
5.1.5	<Name interface m>	11
5.2	Level 2	11
5.2.1	White Box <building block 1>	11
5.2.2	White Box <building block 2>	11
5.2.3	White Box <building block m>	11
5.3	Level 3	12
5.3.1	White Box <_building block x.1_>	12
5.3.2	White Box <_building block x.2_>	12
5.3.3	White Box <_building block y.1_>	12
6	Runtime View	12
6.1	<Runtime Scenario 1>	13
6.2	<Runtime Scenario 2>	13
6.3	<Runtime Scenario n>	13
7	Deployment View	13
7.1	Infrastructure Level 1	14
7.2	Infrastructure Level 2	14
7.2.1	<Infrastructure Element 1>	14
7.2.2	<Infrastructure Element 2>	14
7.2.3	<Infrastructure Element n>	14
8	Cross-cutting Concepts	15
8.1	<Concept 1>	16
8.2	<Concept 2>	16
8.3	<Concept n>	16

9	Architecture Decisions	16
9.1	Approach	16
9.2	Decision Log	17
9.3	Decisions	17
9.3.1	ADR-NN: <Short title of the decision>	17
10	Quality Requirements	17
10.1	Quality Requirements Overview	18
10.2	Quality Scenarios	18
11	Risks and Technical Debts	19
12	Glossary	19

List of Figures

1	Overview on ISO 25010	5
2	Example for Building Block View from template (hint: rather use clean UML package or component diagrams)	9
3	Chaotic Cross-Cutting Concerns in arc42, Domain Concepts etc. belong into a DDD subchapter, Safety, Security, under-the hood are quality categories in ISO 25010 (clean this up for your project).	15

1 Introduction and Goals

Describes the relevant requirements and the driving forces that software architects and development team must consider. These include

- underlying business goals,
- essential features,
- essential functional requirements,
- quality goals for the architecture and
- relevant stakeholders and their expectations

1.1 Functional Requirements

Contents

Short description of the functional requirements, driving forces, extract (or abstract) of requirements. Link to (hopefully existing) requirements documents (with version number and information where to find it).

Motivation

From the point of view of the end users a system is created or modified to improve support of a business activity and/or improve the quality.

Form

Short textual description, probably in tabular use-case format. If requirements documents exist this overview should refer to these documents. Keep these excerpts as short as possible. Balance readability of this document with potential redundancy w.r.t to requirements documents.

Further Information

See Introduction and Goals in the arc42 documentation.

1.2 Quality Goals

Contents

The top three (max five) quality goals for the architecture whose fulfillment is of highest importance to the major stakeholders. We really mean quality goals for the architecture. Don't confuse them with project goals. They are not necessarily identical. Consider this overview of potential topics (based upon the ISO 25010 standard):

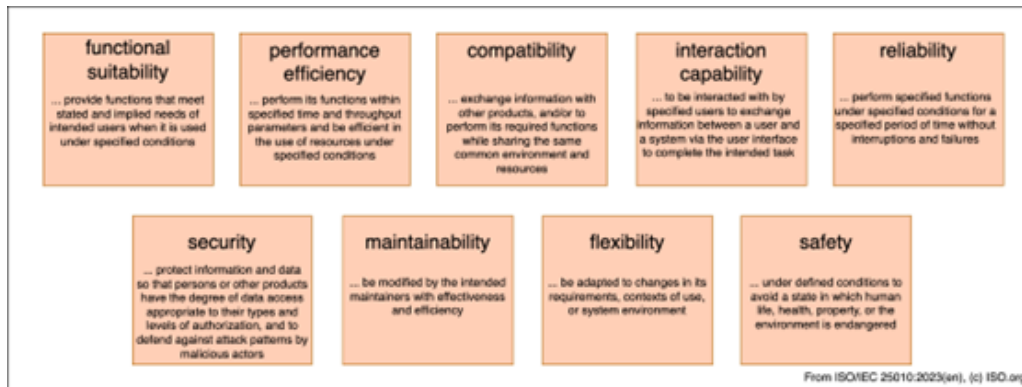


Figure 1: Overview on ISO 25010

Hier ein Beispiel für eine Referenz, die dann auch automatisch aktualisiert:
In Figure 1, we discuss ...

Motivation

You should know the quality goals of your most important stakeholders, since they will influence fundamental architectural decisions. Make sure to be very concrete about these qualities, avoid buzzwords. If you as an architect do not know how the quality of your work will be judged...

Form

A table with quality goals and concrete scenarios, ordered by priorities

1.3 Stakeholders

Contents

Explicit overview of stakeholders of the system, i.e. all person, roles or organizations that

- should know the architecture
- have to be convinced of the architecture
- have to work with the architecture or with code
- need the documentation of the architecture for their work
- have to come up with decisions about the system or its development

Motivation

You should know all parties involved in development of the system or affected by the system. Otherwise, you may get nasty surprises later in the development process. These stakeholders determine the extent and the level of detail of your work and its results.

Form

Table with role names, person names, and their expectations with respect to the architecture and its documentation.

Role/Name	Contact	Expectations
<Role-1>	<Contact-1>	<Expectation-1>
<Role-2>	<Contact-2>	<Expectation-2>

2 Architecture Constraints

Contents

Any requirement that constraints software architects in their freedom of design and implementation decisions or decision about the development process. These constraints sometimes go beyond individual systems and are valid for whole organizations and companies.

Motivation

Architects should know exactly where they are free in their design decisions and where they must adhere to constraints. Constraints must always be dealt with; they may be negotiable, though.

Form

Simple tables of constraints with explanations. If needed you can subdivide them into technical constraints, organizational and political constraints and conventions (e.g. programming or versioning guidelines, documentation or naming conventions)

Further Information

See Architecture Constraints in the arc42 documentation: <https://docs.arc42.org/section-2/>

3 Context and Scope

Contents

Context and scope - as the name suggests - delimits your system (i.e. your scope) from all its communication partners (neighboring systems and users, i.e. the context of your system). It thereby specifies the external interfaces. If necessary, differentiate the business context (domain specific inputs and outputs) from the technical context (channels, protocols, hardware).

Motivation

The domain interfaces and technical interfaces to communication partners are among your system's most critical aspects. Make sure that you completely understand them.

Form

Various options:

- Context diagrams
- Lists of communication partners and their interfaces.

Further Information

See Context and Scope in the arc42 documentation: <https://docs.arc42.org/section-3/>

3.1 Business Context

Contents

Specification of all communication partners (users, IT-systems, ...) with explanations of domain specific inputs and outputs or interfaces. Optionally you can add domain specific formats or communication protocols.

Motivation

All stakeholders should understand which data are exchanged with the environment of the system.

Form

All kinds of diagrams that show the system as a black box and specify the domain interfaces to communication partners. Alternatively (or additionally) you can use a table. The title of the table is the name of your system, the three columns contain the name of the communication partner, the inputs, and the outputs. <Diagram or Table>
<optionally: Explanation of external domain interfaces>

3.2 Technical Context

Contents

Technical interfaces (channels and transmission media) linking your system to its environment. In addition a mapping of domain specific input/output to the channels, i.e. an explanation which I/O uses which channel.

Motivation

Many stakeholders make architectural decision based on the technical interfaces between the system and its context. Especially infrastructure or hardware designers decide these technical interfaces.

Form

E.g. UML deployment diagram describing channels to neighboring systems, together with a mapping table showing the relationships between channels and input/output. <Diagram or Table>
<optionally: Explanation of technical interfaces>
<Mapping Input/Output to Channels>

4 Solution Strategy

Contents

A short summary and explanation of the fundamental decisions and solution strategies, that shape system architecture. It includes

- technology decisions
- decisions about the top-level decomposition of the system, e.g. usage of an architectural pattern or design pattern
- decisions on how to achieve key quality goals
- relevant organizational decisions, e.g. selecting a development process or delegating certain tasks to third parties.

Motivation

These decisions form the cornerstones for your architecture. They are the foundation for many other detailed decisions or implementation rules.

Form

Keep the explanations of such key decisions short.

Motivate what was decided and why it was decided that way, based upon problem statement, quality goals and key constraints. Refer to details in the following sections.

Further Information

See Solution Strategy in the arc42 documentation: <https://docs.arc42.org/section-4/>

5 Building Block View

Content

The building block view shows the static decomposition of the system into building blocks (modules, components, subsystems, classes, interfaces, packages, libraries, frameworks, layers, partitions, tiers, functions, macros, operations, data structures, ...) as well as their dependencies (relationships, associations, ...)

This view is mandatory for every architecture documentation. In analogy to a house this is the floor plan.

Motivation

Maintain an overview of your source code by making its structure understandable through abstraction. This allows you to communicate with your stakeholder on an abstract level without disclosing implementation details.

Form

The building block view is a hierarchical collection of black boxes and white boxes (see figure below) and their descriptions.

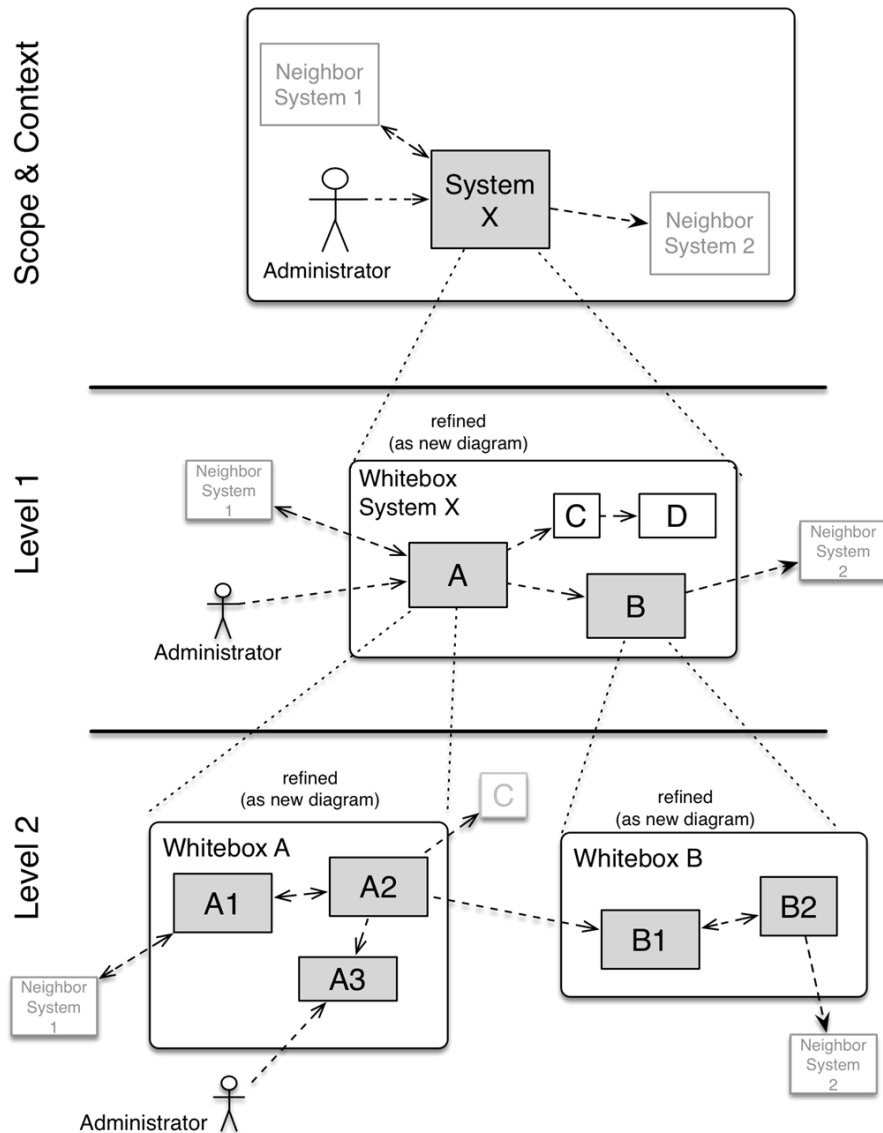


Figure 2: Example for Building Block View from template (hint: rather use clean UML package or component diagrams)

Level 1 is the white box description of the overall system together with black box descriptions of all contained building blocks. Level 2 zooms into some building blocks of level 1. Thus it contains the white box description of selected building blocks of level 1, together with black box descriptions of their internal building blocks. Level 3 zooms into selected building blocks of level 2, and so on.

Further Information

See Building Block View in the arc42 documentation: <https://docs.arc42.org/section-5/>

5.1 Whitebox Overall System

Here you describe the decomposition of the overall system using the following white box template. It contains

- an overview diagram

- a motivation for the decomposition
- black box descriptions of the contained building blocks. For these we offer you alternatives:
 - use one table for a short and pragmatic overview of all contained building blocks and their interfaces
 - use a list of black box descriptions of the building blocks according to the black box template (see below). Depending on your choice of tool this list could be sub-chapters (in text files), sub-pages (in a Wiki) or nested elements (in a modeling tool).
- (optional:) important interfaces, that are not explained in the black box templates of a building block, but are very important for understanding the white box. Since there are so many ways to specify interfaces why do not provide a specific template for them. In the worst case you have to specify and describe syntax, semantics, protocols, error handling, restrictions, versions, qualities, necessary compatibilities and many things more. In the best case you will get away with examples or simple signatures.

<Overview Diagram>

Motivation

<text explanation>

Contained Building Blocks

<Description of contained building block (black boxes)>

Important Interfaces

<Description of important interfaces>Insert your explanations of black boxes from level 1: If you use tabular form you will only describe your black boxes with name and responsibility according to the following schema:

Name	Responsibility
<black box 1>	<Text>
<black box 2>	<Text>

Table 2: Contained Building Blocks (Level 1)

If you use a list of black box descriptions then you fill in a separate black box template for every important building block. Its headline is the name of the black box.

5.1.1 <Name black box 1>

Here you describe <black box 1> according the the following black box template:

- Purpose/Responsibility
- Interface(s), when they are not extracted as separate paragraphs. This interfaces may include qualities and performance characteristics.
- (Optional) Quality-/Performance characteristics of the black box, e.g. availability, run time behavior, ...

- (Optional) directory/file location
- (Optional) Fulfilled requirements (if you need traceability to requirements).
- (Optional) Open issues/problems/risks

<Purpose/Responsibility>
 <Interface(s)>
 <(Optional) Quality/Performance Characteristics>
 <(Optional) Directory/File Location>
 <(Optional) Fulfilled Requirements>
 <(Optional) Open Issues/Problems/Risks>

5.1.2 <Name black box 2>

<black box template>

5.1.3 <Name black box n>

<black box template>

5.1.4 <Name interface 1>

...

5.1.5 <Name interface m>

...

5.2 Level 2

Here you can specify the inner structure of (some) building blocks from level 1 as white boxes.

You have to decide which building blocks of your system are important enough to justify such a detailed description. Please prefer relevance over completeness. Specify important, surprising, risky, complex or volatile building blocks. Leave out normal, simple, boring or standardized parts of your system

5.2.1 White Box <building block 1>

...describes the internal structure of building block 1.

<white box template>

5.2.2 White Box <building block 2>

<white box template>

5.2.3 White Box <building block m>

<white box template>

5.3 Level 3

Here you can specify the inner structure of (some) building blocks from level 2 as white boxes.

When you need more detailed levels of your architecture please copy this part of arc42 for additional levels.

5.3.1 White Box <_building block x.1_>

Specifies the internal structure of building block x.1.

<white box template>

5.3.2 White Box <_building block x.2_>

<white box template>

5.3.3 White Box <_building block y.1_>

<white box template>

6 Runtime View

Contents

The runtime view describes concrete behavior and interactions of the system's building blocks in form of scenarios from the following areas:

- important use cases or features: how do building blocks execute them?
- interactions at critical external interfaces: how do building blocks cooperate with users and neighboring systems?
- operation and administration: launch, start-up, stop
- error and exception scenarios

Remark: The main criterion for the choice of possible scenarios (sequences, workflows) is their architectural relevance. It is not important to describe a large number of scenarios. You should rather document a representative selection.

Motivation

You should understand how (instances of) building blocks of your system perform their job and communicate at runtime. You will mainly capture scenarios in your documentation to communicate your architecture to stakeholders that are less willing or able to read and understand the static models (building block view, deployment view).

Form

There are many notations for describing scenarios, e.g.

- numbered list of steps (in natural language)
- activity diagrams or flow charts
- sequence diagrams
- BPMN or EPCs (event process chains)
- state machines
- ...

Further Information

See Runtime View in the arc42 documentation: <https://docs.arc42.org/section-6/>

6.1 <Runtime Scenario 1>

- <insert runtime diagram or textual description of the scenario>
- <insert description of the notable aspects of the interactions between the building block instances depicted in this diagram>

6.2 <Runtime Scenario 2>

...

6.3 <Runtime Scenario n>

...

7 Deployment View

Content

The deployment view describes:

1. technical infrastructure used to execute your system, with infrastructure elements like geographical locations, environments, computers, processors, channels and net topologies as well as other infrastructure elements and
2. mapping of (software) building blocks to that infrastructure elements.

Often systems are executed in different environments, e.g. development environment, test environment, production environment. In such cases you should document all relevant environments.

Especially document a deployment view if your software is executed as distributed system with more than one computer, processor, server or container or when you design and construct your own hardware processors and chips.

From a software perspective it is sufficient to capture only those elements of an infrastructure that are needed to show a deployment of your building blocks. Hardware architects can go beyond that and describe an infrastructure to any level of detail they need to capture.

Motivation

Software does not run without hardware. This underlying infrastructure can and will influence a system and/or some cross-cutting concepts. Therefore, there is a need to know the infrastructure.

Form

Maybe a highest level deployment diagram is already contained in section 3.2. as technical context with your own infrastructure as ONE black box. In this section one can zoom into this black box using additional deployment diagrams:

- UML offers deployment diagrams to express that view. Use it, probably with nested diagrams, when your infrastructure is more complex.

- When your (hardware) stakeholders prefer other kinds of diagrams rather than a deployment diagram, let them use any kind that is able to show nodes and channels of the infrastructure.

Further Information

See Deployment View in the arc42 documentation: <https://docs.arc42.org/section-7/>

7.1 Infrastructure Level 1

Describe (usually in a combination of diagrams, tables, and text):

- distribution of a system to multiple locations, environments, computers, processors, ..., as well as physical connections between them
- important justifications or motivations for this deployment structure
- quality and/or performance features of this infrastructure
- mapping of software artifacts to elements of this infrastructure

For multiple environments or alternative deployments please copy and adapt this section of arc42 for all relevant environments.

<Overview Diagram>

Motivation

<explanation in text form>

Quality and/or Performance Features

<explanation in text form>

Mapping of Building Blocks to Infrastructure

<description of the mapping>

7.2 Infrastructure Level 2

Here you can include the internal structure of (some) infrastructure elements from level 1.

Please copy the structure from level 1 for each selected element.

7.2.1 <Infrastructure Element 1>

<diagram + explanation>

7.2.2 <Infrastructure Element 2>

<diagram + explanation>

7.2.3 <Infrastructure Element n>

<diagram + explanation>

8 Cross-cutting Concepts

Content

This section describes crosscutting concepts (practices, patterns, regulations or solution ideas). Such concepts are often related to multiple building blocks. They may include many different topics, such as the topics shown in the following diagram:



Figure 3: Chaotic Cross-Cutting Concerns in arc42, Domain Concepts etc. belong into a DDD subchapter, Safety, Security, under-the hood are quality categories in ISO 25010 (clean this up for your project).

Motivation

Concepts form the basis for conceptual integrity (consistency, homogeneity) of the architecture. Thus, they are an important contribution to achieve inner qualities of your system.

This is the place in the template that we provided for a cohesive specification of such concepts.

Many of these concepts relate to or influence several of your building blocks.

Form

The form can be varied:

- concept papers with any kind of structure
- example implementations, especially for technical concepts
- cross-cutting model excerpts or scenarios using notations of the architecture views

Structure

Pick only the most-needed topics for your system and assign each a level-2 heading in this section (e.g. 8.1, 8.2 etc).

DO NOT ATTEMPT to cover all of the topics of the aforementioned diagram.

Further Information

See Concepts in the arc42 documentation: <https://docs.arc42.org/section-8/>

8.1 <Concept 1>

<explanation>

8.2 <Concept 2>

<explanation>

8.3 <Concept n>

<explanation>

9 Architecture Decisions

Contents

Important, expensive, large scale or risky architecture decisions including rationales. With “decisions” we mean selecting one alternative based on given criteria.

Please use your judgement to decide whether an architectural decision should be documented here in this central section or whether you better document it locally (e.g. within the white box template of one building block).

Avoid redundancy. Refer to section 4, where you already captured the most important decisions of your architecture.

Motivation

Stakeholders of your system should be able to comprehend and retrace your decisions.

Form

Various options:

- ADR (Documenting Architecture Decisions) for every important decision
- List or table, ordered by importance and consequences or:
- more detailed in form of separate sections per decision

Further Information

See Architecture Decisions in the arc42 documentation: [https://docs.arc42.org/section-9/Documenting Architecture Decisions \(ADR\)](https://docs.arc42.org/section-9/Documenting%20Architecture%20Decisions%20(ADR)):
<https://cognitect.com/blog/2011/11/15/documenting-architecture-decisions>

9.1 Approach

Decisions are documented as Architecture Decision Records (ADR) in the Y-Statement format by Zimmermann [?]. A Y-Statement captures a decision in one sentence with six parts: context, facing (the quality concern), the option chosen, the alternatives neglected, the benefits to achieve, and the consequences accepted. This template was chosen because it keeps each decision short and makes the trade-off explicit. It is extended by a header (status, date, deciders, affected quality goals) and a measurable verification criterion, so that each ADR is specific, measurable and testable (SMART).

9.2 Decision Log

ID	Title	Status	Quality goal
ADR-01	<Title>	proposed	<QG-x>

9.3 Decisions

9.3.1 ADR-NN: <Short title of the decision>

Status	proposed / accepted / rejected / superseded by ADR-XXXX
Date	YYYY-MM-DD
Deciders	<names>
Quality goals	<e.g. QG-1 Performance; see Section ??>

Y-Statement

In the context of <functional requirement (story, use case) or component>,
facing <non-functional requirement, e.g. a desired quality>,
we decided for <option chosen>
and neglected <alternatives not chosen>,
to achieve <benefits, i.e. satisfaction of the requirement(s)>,
accepting that <drawbacks and other consequences, e.g. impact and effort>.

Additional Justification (optional)

Because <extra reasoning gained during decision making; delete if not needed>.

Verification

<Measurable check that shows the decision works, e.g. “p95 latency < 200 ms at 50 concurrent users”. Link to a quality scenario in Section 10.2.>

10 Quality Requirements

Content

This section contains all relevant quality requirements.

The most important of these requirements have already been described in section 1.2. (quality goals), therefore they should only be referenced here. In this section 10 you should also capture quality requirements with lesser importance, which will not create high risks when they are not fully achieved (but might be nice-to-have).

Motivation

Since quality requirements will have a lot of influence on architectural decisions you should know what qualities are really important for your stakeholders, in a specific and measurable way.

- See Quality Requirements in the arc42 documentation: <https://docs.arc42.org/section-10/>
- See the extensive Q42 quality model on <https://quality.arc42.org>

10.1 Quality Requirements Overview

Content

An overview or summary of quality requirements.

Motivation

Often we encounter dozens (or even hundreds) of detailed quality requirements. In this overview section you should try to summarize, e.g. by describing categories or topics (as suggested by ISO 25010:2023 or Q42)

If these summary descriptions are already precise, specific enough and measurable, you may skip section 10.2.

Form

Use a simple table in which each line contains a category or topic and a short description of the quality requirement. Alternatively, you may use a mindmap to structure these quality requirements. In literature, the idea of a quality attribute tree has also been described, which puts the generic term “quality” as the root and uses a tree-like refinement of the term “quality”. [Bass+21] introduced the term “Quality Attribute Utility Tree” for this purpose.

10.2 Quality Scenarios

Content

Quality scenarios make quality requirements concrete and allow to decide whether they are fulfilled (in the sense of acceptance criteria). Ensure that your scenarios are specific and measurable.

Two kinds of scenarios are especially useful:

- Usage scenarios (also called application scenarios or use case scenarios) describe the system’s runtime reaction to a certain stimulus. This also includes scenarios that describe the system’s efficiency or performance. Example: The system reacts to a user’s request within one second.
- Change scenarios describe the desired effect of a modification or extension of the system or of its immediate environment. Example: Additional functionality is implemented or requirements for a quality attribute change, and the effort or duration of the change is measured.

Form

Typical information for detailed scenarios include the following:

In short form (favoured in the Q42 model):

- Context/Background: What kind of system or component, what is the environment or situation?
- Source/Stimulus: Who or what initiates or triggers a behaviour, reaction or action.
- Metric/Acceptance Criteria: A response including a measure or metric

The long form of scenarios (favoured by the SEI and [Bass+21]) is more detailed and includes the following information:

- Scenario ID: A unique identifier for the scenario.
- Scenario Name: A short, descriptive name for the scenario.
- Source: The entity (user, system, or event) that initiates the scenario.

- Stimulus: The triggering event or condition the system must address.
- Environment: The operational context or condition under which the system experiences the stimulus.
- Artifact: The building-blocks or other elements of the system affected by the stimulus.
- Response: The outcome or behavior the system exhibits in reaction to the stimulus.
- Response Measure: The criteria or metric by which the system’s response is evaluated.

Examples

See the Q42 quality model website for detailed examples of quality requirements: <https://quality.arc42.org>

ISO 25010: <https://www.iso.org/obp/ui/#iso:std:iso-iec:25010:ed-2:v1:en>

Q42: <https://quality.arc42.org/>

11 Risks and Technical Debts

Contents

A list of identified technical risks or technical debts, ordered by priority

Motivation

“Risk management is project management for grown-ups” (Tim Lister, Atlantic Systems Guild.)

This should be your motto for systematic detection and evaluation of risks and technical debts in the architecture, which will be needed by management stakeholders (e.g. project managers, product owners) as part of the overall risk analysis and measurement planning.

Form

List of risks and/or technical debts, probably including suggested measures to minimize, mitigate or avoid risks or reduce technical debts.

Further Information

See Risks and Technical Debt in the arc42 documentation: <https://docs.arc42.org/section-11/>

12 Glossary

Contents

The most important domain and technical terms that your stakeholders use when discussing the system.

You can also see the glossary as source for translations if you work in multi-language teams.

Motivation

You should clearly define your terms, so that all stakeholders

- have an identical understanding of these terms
- do not use synonyms and homonyms

Form

A table with columns <Term> and <Definition>.

Potentially more columns in case you need translations.

Further Information

See Glossary in the arc42 documentation: <https://docs.arc42.org/section-12/>

Term	Definition
<Term-1>	<definition-1>
<Term-2>	<definition-2>

List of References

References

- [1] BPK2021 Bass, Len, Paul Clements, and Rick Kazman. *Software architecture in practice*. Addison-Wesley Professional, 2021.
- [2] CZL2008 Pautasso, Cesare, Olaf Zimmermann, and Frank Leymann. “Restful web services vs. “big” web services: making the right architectural decision.” *Proceedings of the 17th international conference on World Wide Web*. pp. 805–814. 2008.
- [3] B1987 Brooks, Frederik P., and No Silver Bullet. “Essence and accidents of software engineering.” *IEEE computer* 20.4 (1987): 10–19.