n_nodes

October 26, 2026


```
This file is part of CasADi.

CasADi -- A symbolic framework for dynamic optimization.
Copyright (C) 2010-2023 Joel Andersson, Joris Gillis, Moritz Diehl,
                        KU Leuven. All rights reserved.
Copyright (C) 2011-2014 Greg Horn

CasADi is free software; you can redistribute it and/or
modify it under the terms of the GNU Lesser General Public
License as published by the Free Software Foundation; either
version 3 of the License, or (at your option) any later version.

CasADi is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE.  See the GNU
Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public
License along with CasADi; if not, write to the Free Software
Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA  02110-1301  USA
```



1 n_nodes

[1]:
```
import casadi as ca
from casadi.tools import *
```

Let's build a trivial symbolic SX graph


[2]:
```
x = ca.SX.sym("x")
y = ca.SX.sym("y")
z = x*y+2*y
print(ca.n_nodes(z), " nodes in ", z)
dotdraw(z)
```

```
5  nodes in  ((x*y)+(2.*y))
```

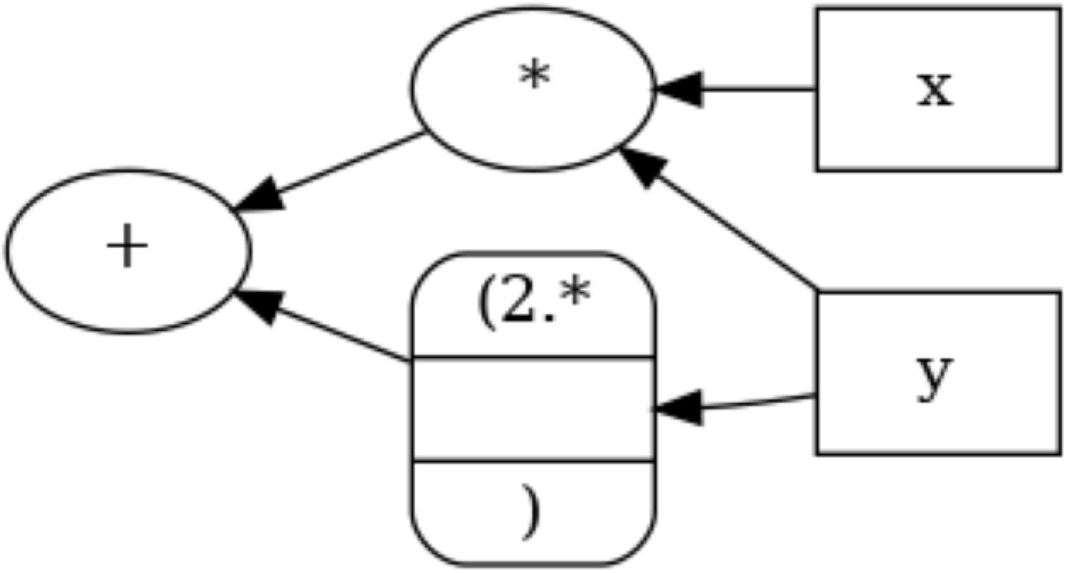


[3]:
```
z += 4*z
print(ca.n_nodes(z), " nodes in ", z)
dotdraw(z)
```

```
8  nodes in  @1=((x*y)+(2.*y)), (@1+(4*@1))
```

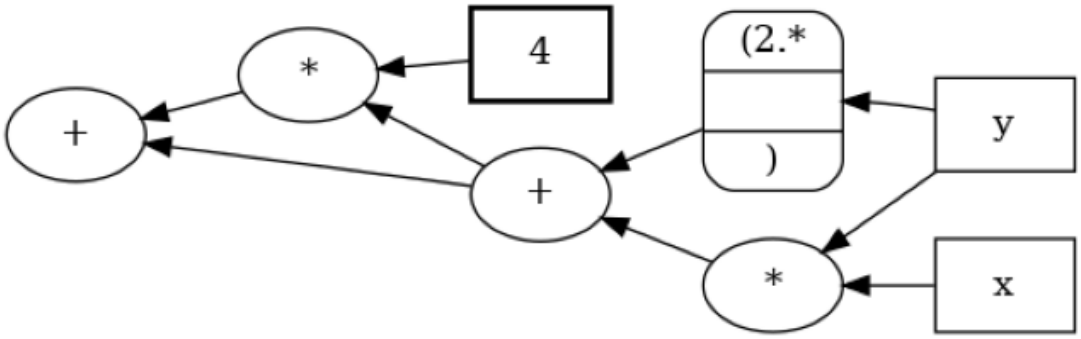

[4]:
```
z *= z+1
print(ca.n_nodes(z), " nodes in ", z)
dotdraw(z)
```

```
11  nodes in  @1=((x*y)+(2.*y)), @2=(@1+(4*@1)), (@2*(@2+1))
```

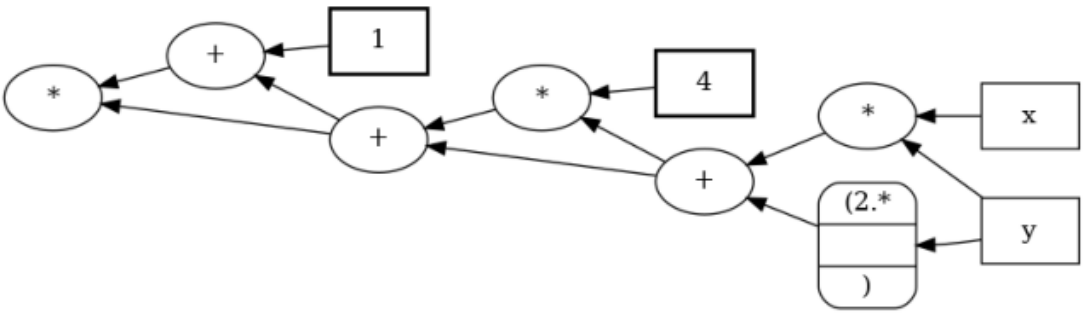
1
+
*
+
4
*
*
x
+
(2.*
)
y

[ ]: