

tolerance

August 22, 2026

This file is part of CasADi.

CasADi -- A symbolic framework for dynamic optimization.
Copyright (C) 2010-2023 Joel Andersson, Joris Gillis, Moritz Diehl,
KU Leuven. All rights reserved.
Copyright (C) 2011-2014 Greg Horn

CasADi is free software; you can redistribute it and/or
modify it under the terms of the GNU Lesser General Public
License as published by the Free Software Foundation; either
version 3 of the License, or (at your option) any later version.

CasADi is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU
Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public
License along with CasADi; if not, write to the Free Software
Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

1 Integrator tolerances

```
[1]: import casadi as ca  
from numpy import *  
from pylab import *
```

```
[2]: x=ca.SX.sym('x')  
dx=ca.SX.sym('dx')  
states = ca.vertcat(x,dx)
```

```
[3]: dae={'x':states, 'ode':ca.vertcat(dx,-x)}
```

```
[4]: tend = 2*pi*3  
ts = linspace(0,tend,1000)
```


```
[5]: tolerances = [-10,-5,-4,-3,-2,-1]
```

```
[6]: figure()
```

```
[6]: <Figure size 640x480 with 0 Axes>
```

```
<Figure size 640x480 with 0 Axes>
```

```
[7]: for tol in tolerances:
      opts = {'reltol':10.0**tol, 'abstol':10.0**tol}
      F = ca.integrator('F', 'cvodes', dae, 0, ts, opts)
      res = F(x0=[1,0])
      plot(ts,array(res['xf'])[0,:].T,label='tol = 1e%d' % tol)
      legend( loc='upper left')
      xlabel('Time [s]')
      ylabel('State x [-]')
      show()
```

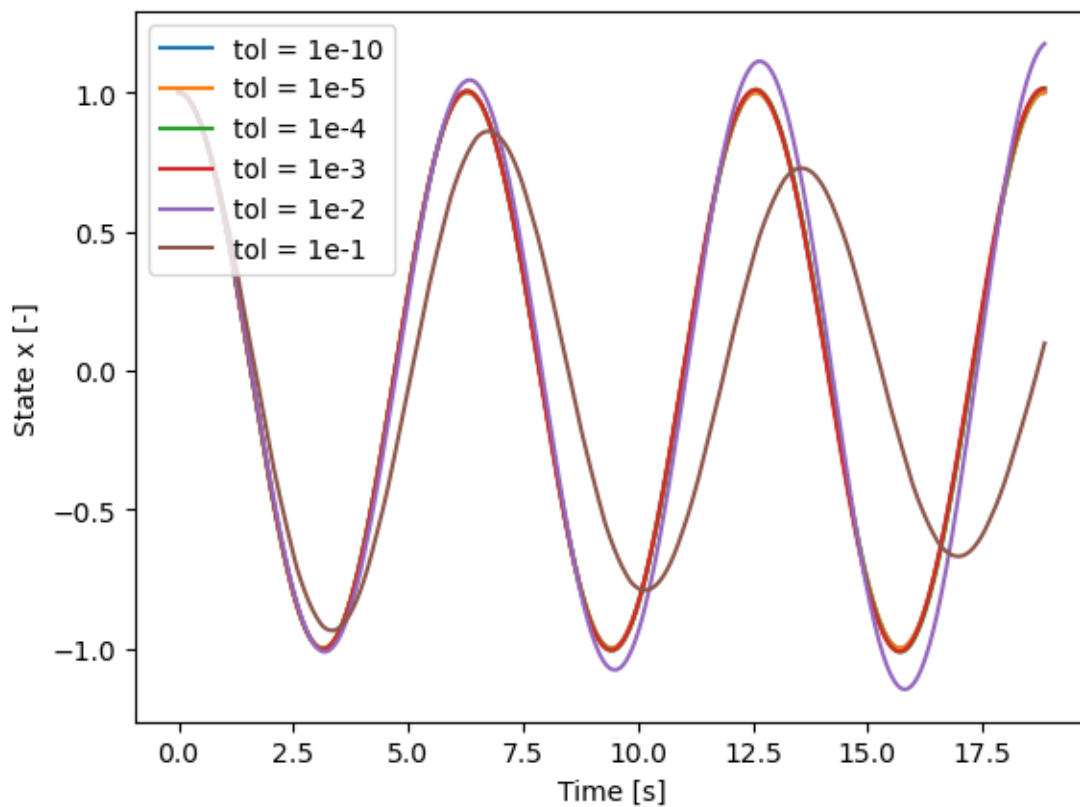

```
[8]: tolerances = logspace(-15,1,500)
      endresult=[]
```

```
[9]: for tol in tolerances:
      opts = {}
```

```

opts['reltol'] = tol
opts['abstol'] = tol
F = ca.integrator('F', 'cvodes', dae, 0, tend, opts)
res = F(x0=[1,0])
endresult.append(res['xf'][0])

```

```
[10]: endresult = ca.vcat(endresult)
```

```

[11]: figure()
loglog(tolerances, (array(endresult)-1), 'b', label='Positive error')
loglog(tolerances, -(array(endresult)-1), 'r', label='Negative error')
xlabel('Integrator relative tolerance')
ylabel('Error at the end of integration time')
legend(loc='upper left')
show()

```

