
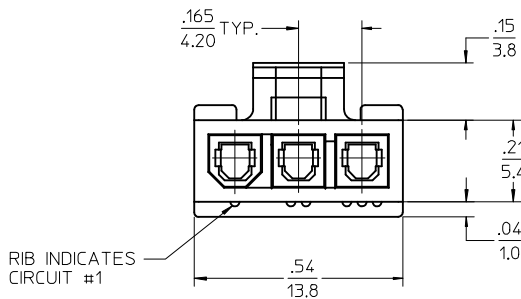
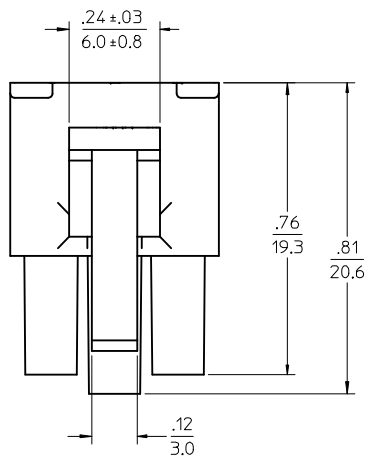


PART NO.	ENG. NO.	CKT SIZE	MATERIAL (SEE NOTE 1)
39-01-4030	5557-03R2	3	UL 94V-2
39-01-4031	5557-03R2-210	3	UL 94V-0
39-01-5039	5557-03R2-BL	3	UL 94V-2, BLACK
46999-0287	5557-03R2-400	3	UL 94V-0, BLACK


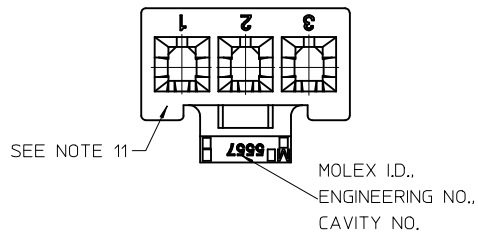


#### LEGEND

5557-03R2-\*\*\*  
 CKT SIZE ———  
 RECEPTACLE ———  
 MATERIAL OPTION:  
 (SEE NOTE 1) ———

#### NOTES:

- MATERIAL:  
 "BLANK"-NYLON 6/6, UL94V-2, LOW HALOGEN, COLOR: NATURAL  
 "210"-NYLON 6/6, UL94V-0, LOW HALOGEN, COLOR: NATURAL  
 "BL"-NYLON 6/6, UL94V-2, LOW HALOGEN, COLOR: BLACK  
 "400"-NYLON 6/6, UL94V-0, LOW HALOGEN, COLOR: BLACK
- FINISH: NOT APPLICABLE
- PRODUCT SPECIFICATION: PS-5556-001
- PACKAGING: PK-5557-002
- PART MATES WITH MOLEX RIGHT ANGLE HEADER #5569-03A\*, VERTICAL HEADER #5566-03A3\* AND PLUG #5559-03P\*.
- PART TO BE USED WITH MOLEX FEMALE TERMINAL #5556.
- WHEN MATING WITH ANOTHER CONNECTOR, THE CENTER CIRCUIT WILL "MAKE FIRST AND BREAK LAST".
- PART IS NOT DESIGNED FOR CURRENT SHARING.
- CONNECTOR ASSEMBLIES ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
- WIRES ARE TO BE DRESSED IN SUCH A MANNER TO ALLOW THE TERMINALS TO FLOAT FREELY IN THE POCKET.
- "MX" TRADEMARK MAY BE LOCATED ON LATCH OR SURFACE INDICATED. CAVITY NO. MAY BE LOCATED ON EITHER SIDE OF ENGINEERING NO. ON LATCH.
- PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

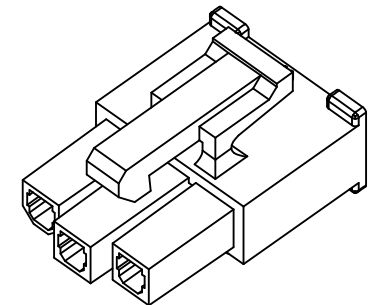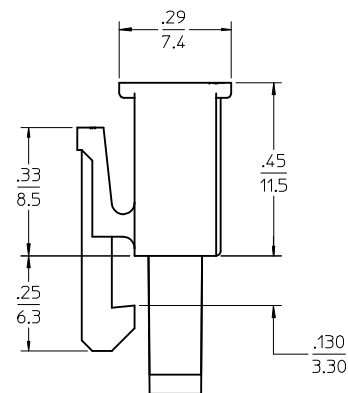

ADD LOW HALOGEN EC NO: UCP2013-1411 2012/10/10 DRWN:BBEE 2012/10/10 CHKD:JBELL 2012/10/12 APPR:FSMITH	DESCRIPTION          REV G2	QUALITY SYMBOLS  <
--	--	--