


PokeXWhoop — Physiological Context Layer for Poke

One-line summary: Turn WHOOP telemetry into a compact, agent-usable context layer that improves Poke's timing, tone, and proactive behavior.


Problem

Poke sent proactive messages without understanding the user's physiological state (sleep, recovery, stress), leading to mis-timed check-ins and lower trust in automation.


Before → After

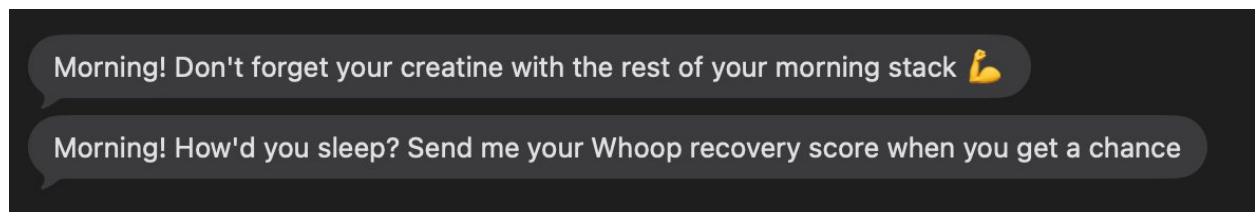

Before — Misaligned timing: Poke sent proactive check-ins without physiological context, sometimes while the user was asleep or not ready to engage.

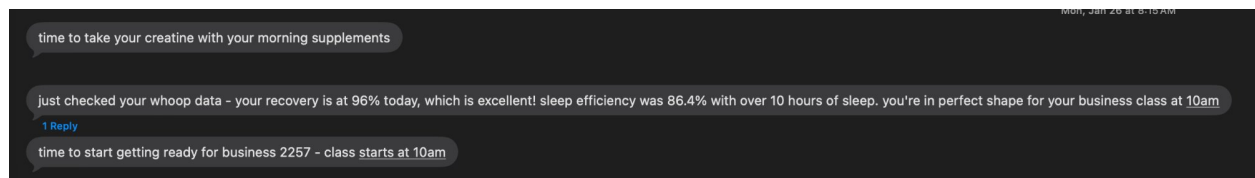

WHOOP → State: The system reads recovery, strain, and sleep data and classifies the user into agent-usable states (Primed, Baseline, Drift Risk, High Drift Risk, Urgent).

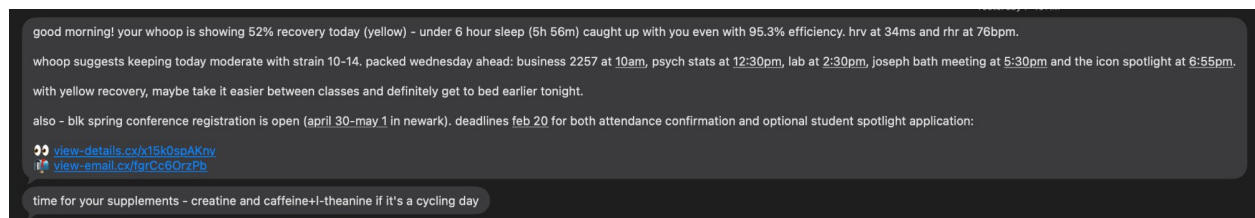

After — Behavior changes: Poke adjusts timing, tone, and suggestions based on state (waits for wake activity, shortens responses when depleted, suppresses non-urgent nudges under high strain).

What I Built

- WHOOP integration with reliable OAuth and token refresh.
- `get_poke_context()` gateway returning a single state + context payload.
- Wake detection and engagement logging to improve message timing.
- State transition tracking to support future learning and optimization.

State Model (v1)

- **Primed** — high recovery, low strain → allow proactive suggestions.
- **Baseline** — normal behavior.
- **Drift Risk** — early negative trend → reduce proactivity.
- **High Drift Risk** — sustained low recovery → suppress non-urgent actions.
- **Urgent** — critical event → allow high-priority interruption.

Example Behavior Rules

- **Protect Focus:** Suppress non-urgent notifications during focus or high readiness states.
- **Protect Recovery:** When depleted, reduce suggestions and recommend recovery actions.

Why This Matters

A simple physiological context layer improves personalization, reduces bad interventions, and increases trust in proactive assistants with minimal product surface area.

Suggested Product Direction

Focus Guardian + Context-Aware Notifications — gate interruptions based on physiological readiness and deliver prioritized digests when appropriate.