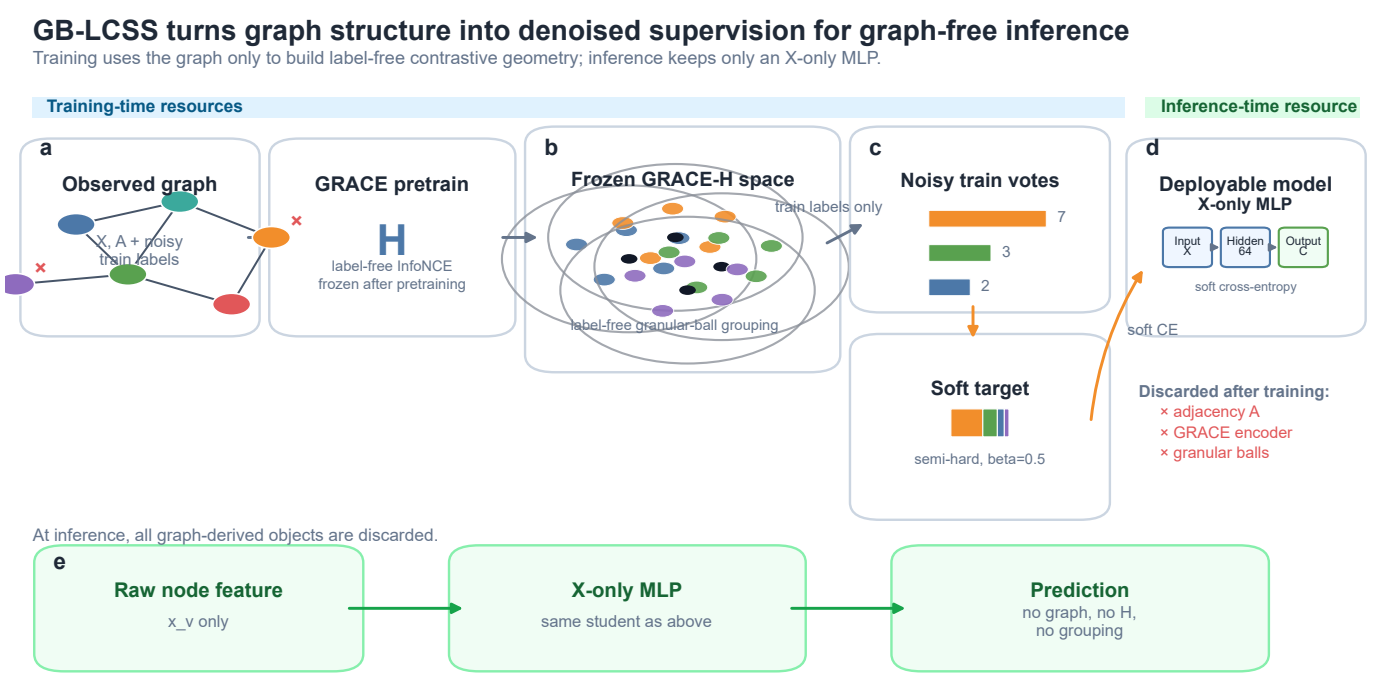


Fig. 1 | Granular-ball local-consensus soft supervision (GB-LCSS). The graph is used only during training to learn label-free GRACE representations and construct local consensus soft targets from noisy training labels. The deployed classifier is an ordinary MLP that takes raw node features only.