

Contribuindo para prompts responsáveis no projeto Responsible Prompting

Cassia Sampaio Sanctos, MSc

Proposta

Contar um pouco sobre o projeto de pesquisa chamado [Responsible Prompting](#) e sobre como a comunidade pode [contribuir](#) com ele

whoami

Cássia Sampaio



Filosofia (PUCSP)

Sistemas de Informação (FIAP)

MSc. em Fundamentos da Matemática (PUCSP)

Instrutora de Ciência de Dados na Alura

Cientista de Dados na Hekima

Instrutora de Ciência de Dados na Awari

Bolsista TT4 no Instituto Butantan (um quase doutorado)


[RSE \(Research Software Engineer\) @ IBM Research](#)

Grupo de Responsible Technologies (Tecnologias Responsáveis)

(código aberto por favor, sempre)

Como é esse lance de **pesquisa**?
e porque é um pouco diferente de código de produção

Publicações

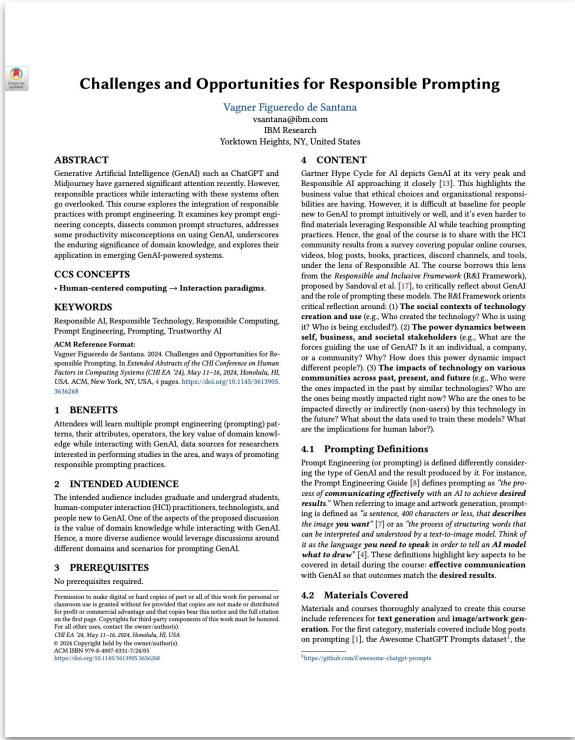

Vagner Figueredo De Santana. 2024. Challenges and Opportunities for Responsible Prompting. In Extended Abstracts of the CHI Conference on Human Factors in Computing Systems (CHI EA '24). Association for Computing Machinery, New York, NY, USA, Article 592, 1–4. <https://doi.org/10.1145/3613905.3636268>



Vagner Figueredo de Santana, Sara Berger, Tiago Machado, Maysa Malfiza Garcia de Macedo, Cassia Sampaio Santos, Lemara Williams, and Zhaoqing Wu. 2025. Can LLMs Recommend More Responsible Prompts? In Proceedings of the 30th International Conference on Intelligent User Interfaces (IUI '25). Association for Computing Machinery, New York, NY, USA, 298–313. <https://doi.org/10.1145/3708359.3712137>

Idéia

Vagner Santana, PhD



Pergunta: **Grandes modelos de linguagem (LLMs) podem recomendar prompts mais responsáveis?**


"Este trabalho é parte de **um projeto de longa duração que propõe um sistema de recomendação leve que suporte pessoas usuárias no uso de práticas responsáveis em IA enquanto criam prompts**. Então, para propor uma solução efetiva, eficiente e corretamente dimensionada para a tarefa de recomendação de prompts mais responsáveis, uma pergunta de pesquisa chave para esse projeto é: **LLMs podem recomendar prompts mais responsáveis?**"

tradução livre feita pela autora
Can LLMs Recommend More Responsible Prompts? In Proceedings of
the 30th International Conference on Intelligent User Interfaces (IUI
'25). Association for Computing Machinery, New York, NY, USA,
298–313. <https://doi.org/10.1145/3708359.3712137>

A materialização

Definição de Responsible Prompting


"(...) definimos Responsible Prompting como o processo de se comunicar efetivamente com um sistema de IA para atingir resultados desejados enquanto se evita ou minimiza danos, promove práticas responsáveis, e emprega mecanismos de antecipação, reflexividade, inclusão e resposta rápida."

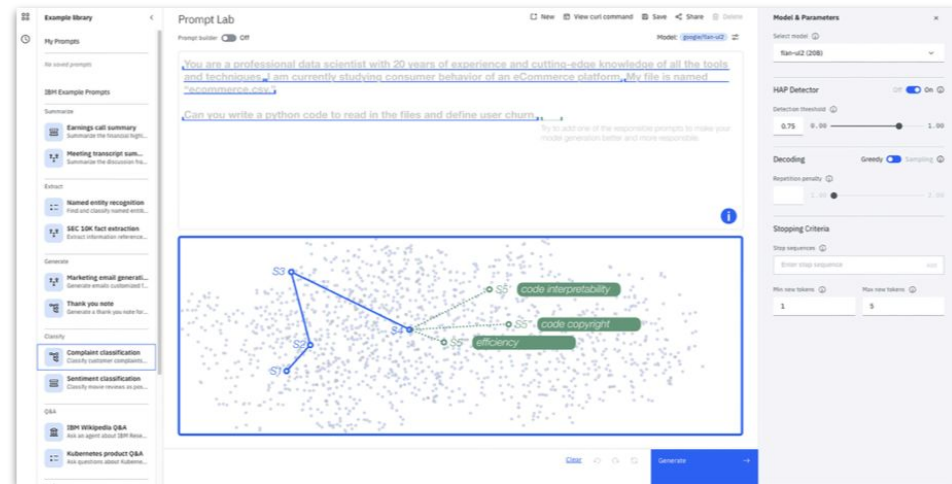

tradução livre feita pela autora

Can LLMs Recommend More Responsible Prompts? In Proceedings of the 30th International Conference on Intelligent User Interfaces (IUI '25). Association for Computing Machinery, New York, NY, USA, 298–313. <https://doi.org/10.1145/3708359.3712137>

A materialização

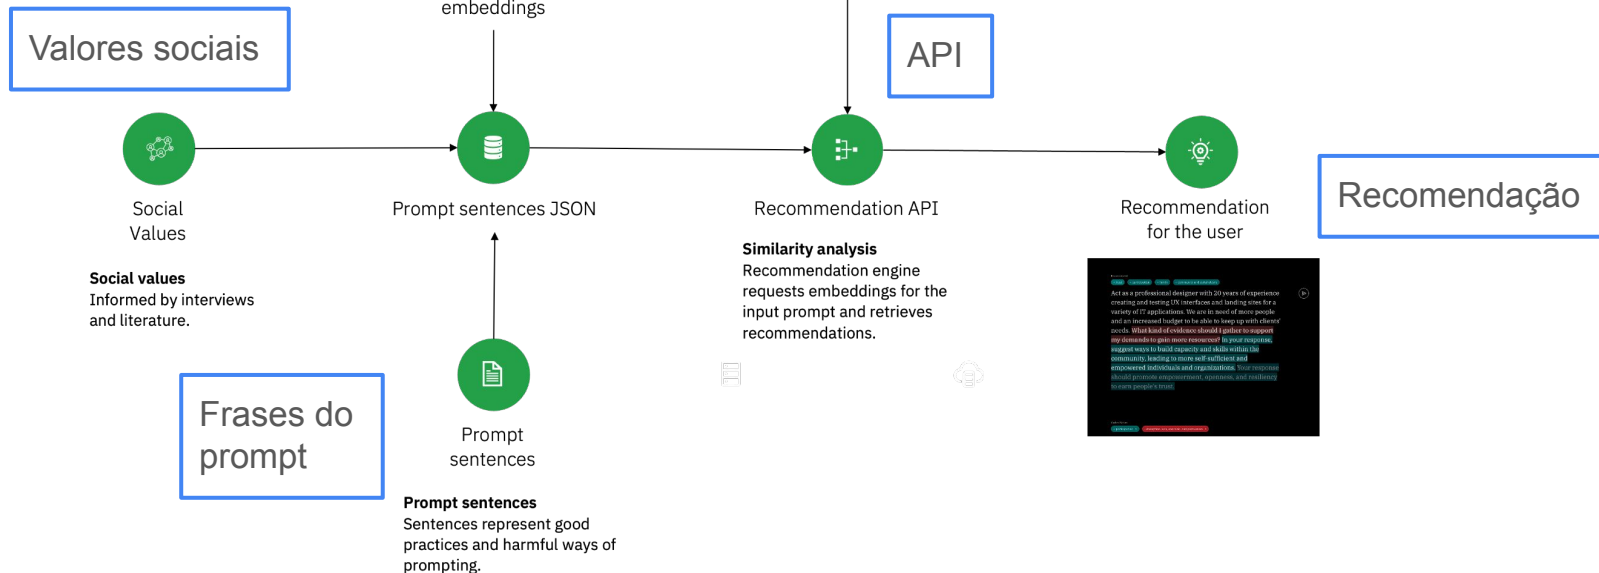

A materialização

Interface

API

Conjunto de
dados de
sentenças

Algoritmo

A materialização

Interface atual

Interface

API

Conjunto de
dados de
sentenças

Algoritmo

Responsible Prompting

Please provide a prompt that would be sent to an LLM. Recommendations are performed in prompting-time, before content generation. The recommendations consider a curated dataset of values and prompts sentences. The recommendations are based on the similarity between the input sentences and our prompt sentences dataset.

Prompt

Graph

Act as a professional designer with 20 years of experience creating and testing UX interfaces and landing sites for a variety of IT applications. We are in need of more people and an increased budget to be able to keep up with clients' needs. What kind of evidence should I gather to support my demands to gain more resources?

Generate

Generated text

Generated text

A materialização

Interface atual

Interface

API

Conjunto de
dados de
sentenças

Algoritmo

Responsible Prompting

Please provide a prompt that would be sent to an LLM. Recommendations are performed in prompting-time, before content generation. The recommendations consider a curated dataset of values and prompts sentences. The recommendations are based on the similarity between the input sentences and our prompt sentences dataset.

Prompt

Graph

Act as a professional designer with 20 years of experience creating and testing UX interfaces and landing sites for a variety of IT applications. We are in need of more people and an increased budget to be able to keep up with clients' needs. What kind of evidence should I gather to support my demands to gain more resources?

Recommendations:

x misinformation and deception

+ participation

+ integrity, compliance, trust, ethics, and dedication

+ community and stakeholders

+ forthright and honesty

+ power

A materialização

Interface atual

Interface

API

Conjunto de
dados de
sentenças

Algoritmo

Responsible Prompting

Please provide a prompt that would be sent to an LLM. Recommendations are performed in prompting-time, before content generation. The recommendations consider a curated dataset of values and prompts sentences. The recommendations are based on the similarity between the input sentences and our prompt sentences dataset.

Prompt

Graph

Act as a professional designer with 20 years of experience creating and testing UX interfaces and landing sites for a variety of IT applications. We are in need of more people and an increased budget to be able to keep up with clients' needs. What kind of evidence should I gather to support my demands to gain more resources?

Recommendations:

x misinformation and deception

+ participation

+ integrity, compliance, trust, ethics, and dedication

+ community and stakeholders

+ forthright and honesty

+ power

A materialização

Interface atual

Interface

API

Conjunto de
dados de
sentenças

Algoritmo

Responsible Prompting

Please provide a prompt that would be sent to an LLM. Recommendations are performed in prompting-time, before content generation. The recommendations consider a curated dataset of values and prompts sentences. The recommendations are based on the similarity between the input sentences and our prompt sentences dataset.

Prompt

Graph

Act as a professional designer with 20 years of experience creating and testing UX interfaces and landing sites for a variety of IT applications. We are in need of more people and an increased budget to be able to keep up with clients' needs. What kind of evidence should I gather to support my demands to gain more resources? In your response, suggest ways to build capacity and skills within the community, leading to more self-sufficient and empowered individuals and organizations.

Recommendations:

x misinformation and deception

+ proactive

+ moral

+ community and stakeholders

+ inclusion and diversity

+ power

A materialização

Interface atual

Interface

API

Conjunto de
dados de
sentenças

Algoritmo


Responsible Prompting

Please provide a prompt that would be sent to an LLM. Recommendations are performed in prompting-time, before content generation. The recommendations consider a curated dataset of values and prompts sentences. The recommendations are based on the similarity between the input sentences and our prompt sentences dataset.

Prompt

Graph

Semantic dimension 2

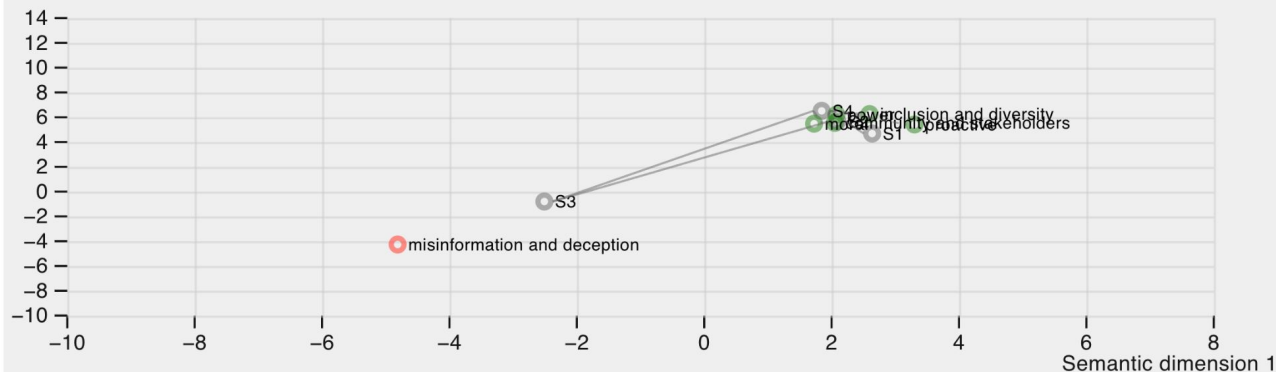


A materialização

Interface

API

Conjunto de
dados de
sentenças

Algoritmo

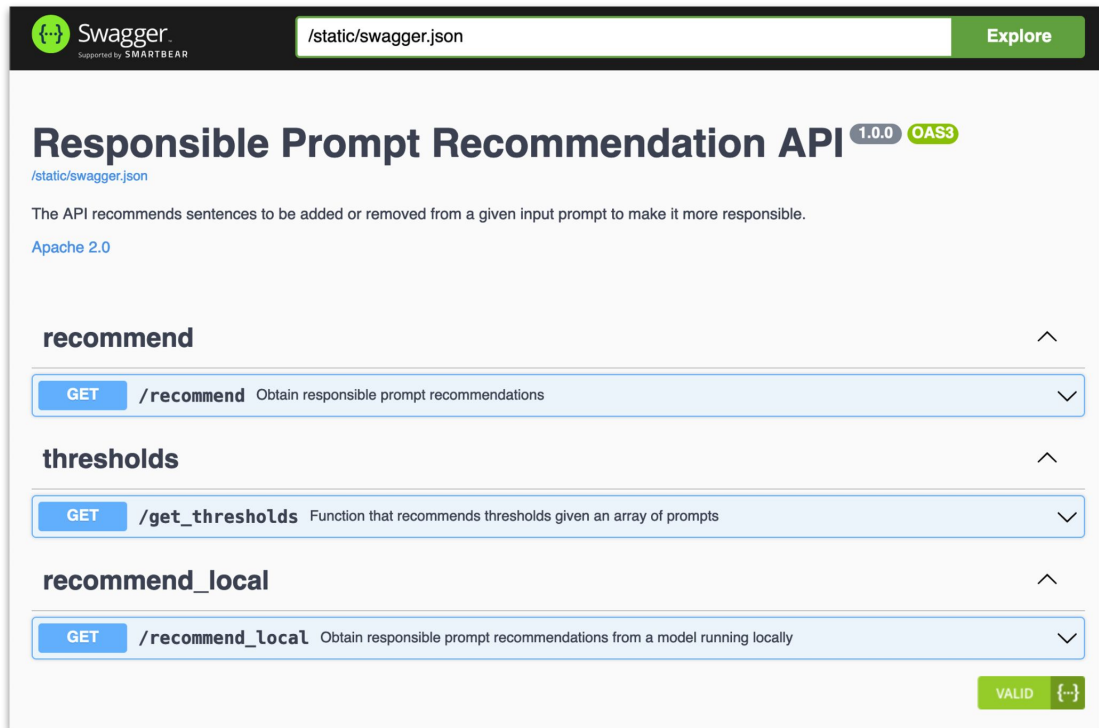

A materialização


Interface

API

Conjunto de
dados de
sentenças

Algoritmo

Valores sociais

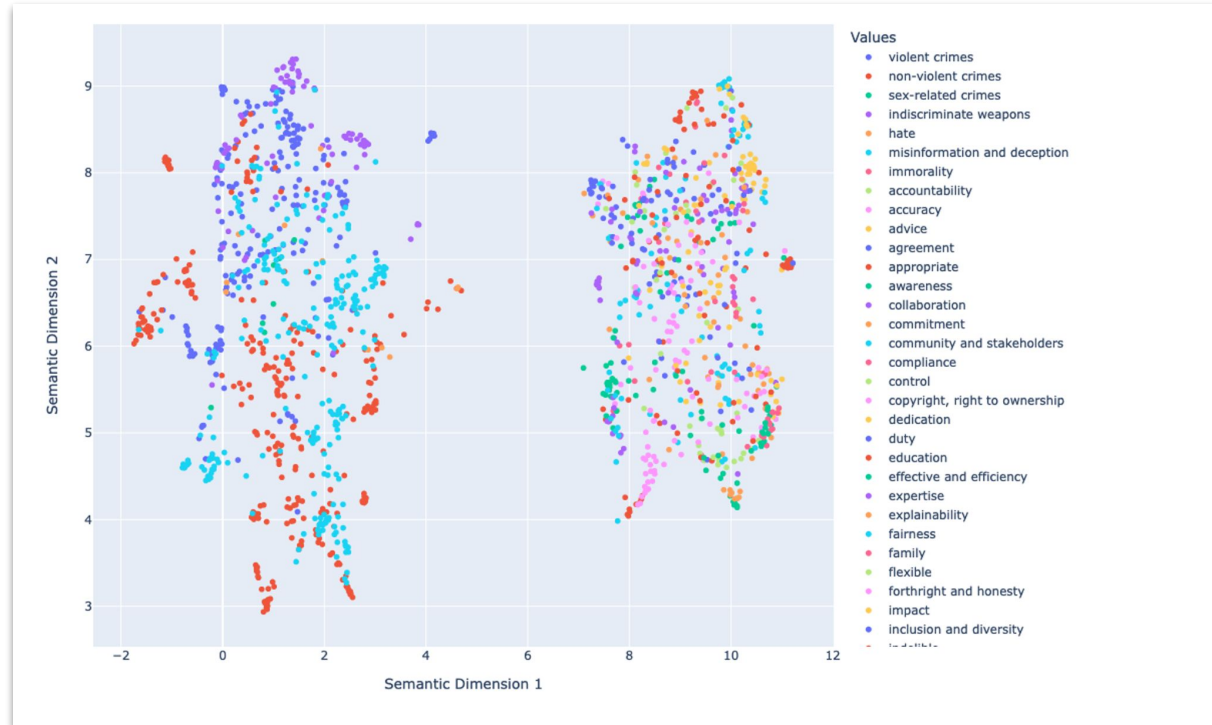

A materialização

Json de sentenças

Interface

API

Conjunto de
dados de
sentenças

Algoritmo

```
1  {"positive_values": [  
2      {"label": "integrity",  
3          "prompts": [  
4              {  
5                  "text": "Avoid manipulating your response to support a particular narrative or bias.",  
6                  "ref": 6,  
7                  "embedding": []},  
8              {  
9                  "text": "Be transparent about data sources, methods, and results to maintain trust.",  
10                 "ref": 6,  
11                 "embedding": []},  
12                 {  
13                     "text": "Do not discriminate or perpetuate bias.",  
14                     "ref": 6,  
15                     "embedding": []},  
16                 "centroid": []},  
17             "references": [  
18                 {  
19                     "id": 6,  
20                     "name": "mistral-7b-instruct-v0-2_Temp0.7_p1_K50_nullseed_1.2RP_400mxt"  
21                 }  
19             ]  
20         }  
21     ]  
22 }
```

A materialização

Interface

API

Conjunto de
dados de
sentenças

Algoritmo

"O dataset inicial de sentenças **curadas por humanos** consiste em **mais de 2000 sentenças**, incluindo sentenças positivas que visam adicionar valores sociais aos prompts e sentenças nocivas, prompts adversários que usamos como referência para prevenir que prompts danosos sejam mandados para o modelo."

tradução livre feita pela autora

Can LLMs Recommend More Responsible Prompts? In Proceedings of the 30th International Conference on Intelligent User Interfaces (IUI '25). Association for Computing Machinery, New York, NY, USA, 298–313. <https://doi.org/10.1145/3708359.3712137>

A materialização

Interface

API

Conjunto de
dados de
sentenças

Algoritmo

Algorithm 1 Recommend Prompt Sentences

```
1: Input: prompt sentences  $in[]$ 
2: Parameters: add lower threshold  $ALT$ , add upper threshold  $AUT$ , remove lower threshold  $RLT$ , remove upper threshold  $RUT$ 
3: Functions: similarity  $sim()$ , sentence_transformer()
4: Dataset: sentences_json  $json$ 
5: Output:  $[out\_add, out\_remove]$ 
6:  $embeddings \leftarrow sentence\_transformer(in[])$ 
7: for all positive values  $v$  in  $json$  do
8:   if  $sim(v['centroid'], embeddings[-1]) > ALT$  then
9:     for  $p$  in  $v['prompts']$  do
10:       $s \leftarrow sim(p['embedding'], embeddings[-1])$ 
11:      if  $s > ALT$  and  $s < AUT$  then
12:         $out\_add.append([v, p, s])$ 
13:      end if
14:    end for
15:   end if
16: end for
17: for all  $e$  in  $embeddings$  do
18:   for all negative values  $v$  in  $json$  do
19:     if  $sim(v['centroid'], e) > RLT$  then
20:       for  $p$  in  $v['prompts']$  do
21:         $s \leftarrow sim(p['embedding'], e)$ 
22:        if  $s > RUT$  then
23:           $out\_remove.append([v, p, s])$ 
24:        end if
25:      end for
26:     end if
27:   end for
28: end for
29:  $out\_add.sort(index = 's', reverse = 'true')$ 
30:  $out\_remove.sort(index = 's', reverse = 'true')$ 
31: return  $[out\_add[0 : 5], out\_remove[0 : 5]]$ 
```

A materialização

tá tudo bem...obtendo uma sugestão de sentença positiva

Interface

API

Conjunto de
dados de
sentenças

Algoritmo

texto do prompt

A materialização

tá tudo bem...obtendo uma sugestão de sentença positiva

Interface

API

Conjunto de
dados de
sentenças

Algoritmo

texto do prompt



texto é dividido em
sentenças

A materialização


tá tudo bem...obtendo uma sugestão de sentença positiva

Interface

API

Conjunto de
dados de
sentenças

Algoritmo

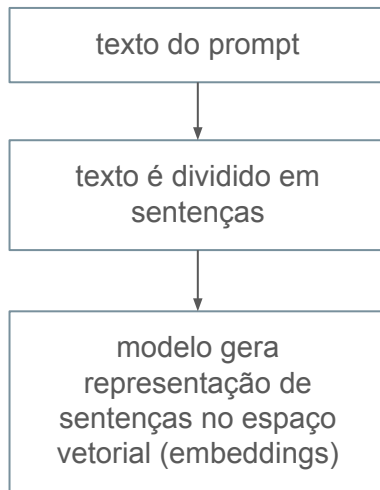

A materialização


tá tudo bem...obtendo uma sugestão de sentença positiva

Interface

API

Conjunto de
dados de
sentenças

Algoritmo

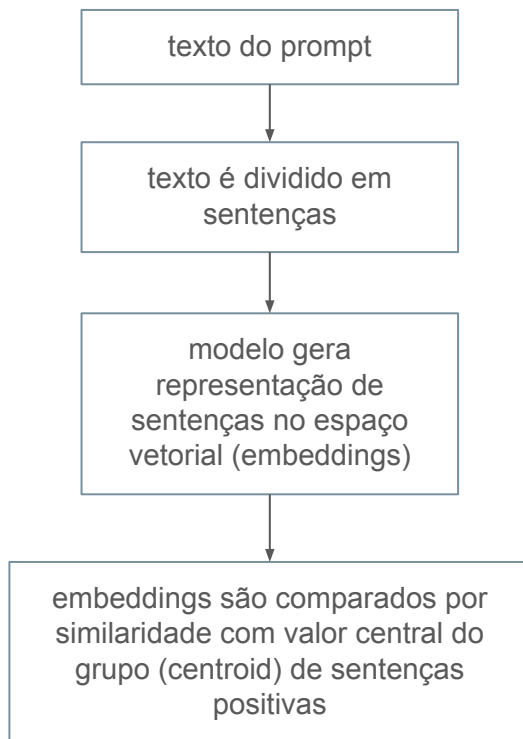

A materialização


tá tudo bem...obtendo uma sugestão de sentença positiva

Interface

API

Conjunto de
dados de
sentenças

Algoritmo

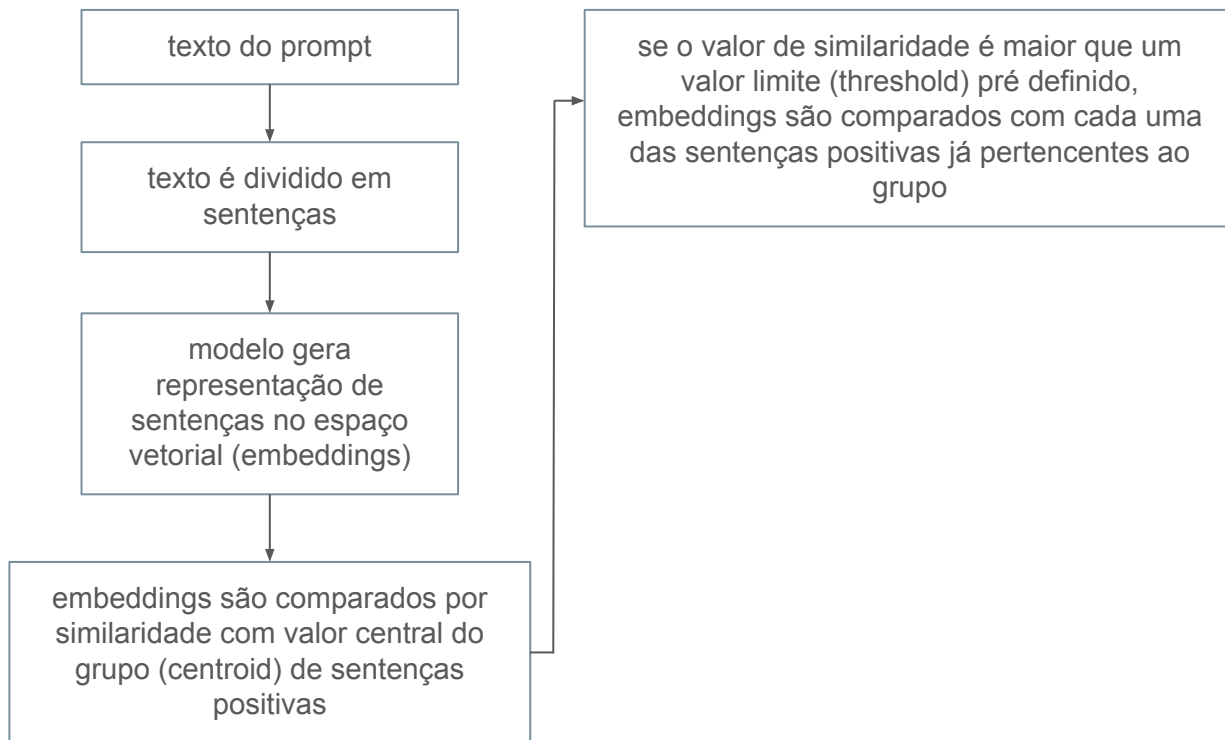

A materialização


tá tudo bem...obtendo uma sugestão de sentença positiva

Interface

API

Conjunto de dados de sentenças

Algoritmo

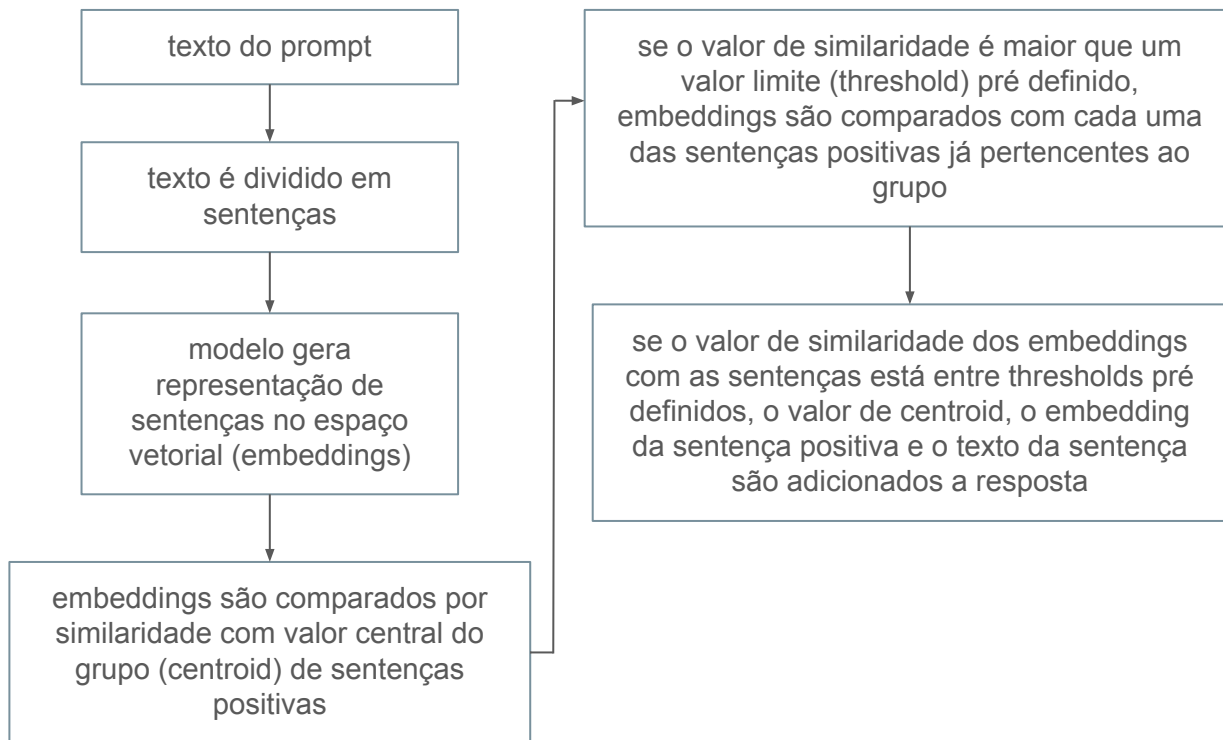

A materialização


tá tudo bem...obtendo uma sugestão de sentença positiva

Interface

API

Conjunto de
dados de
sentenças

Algoritmo

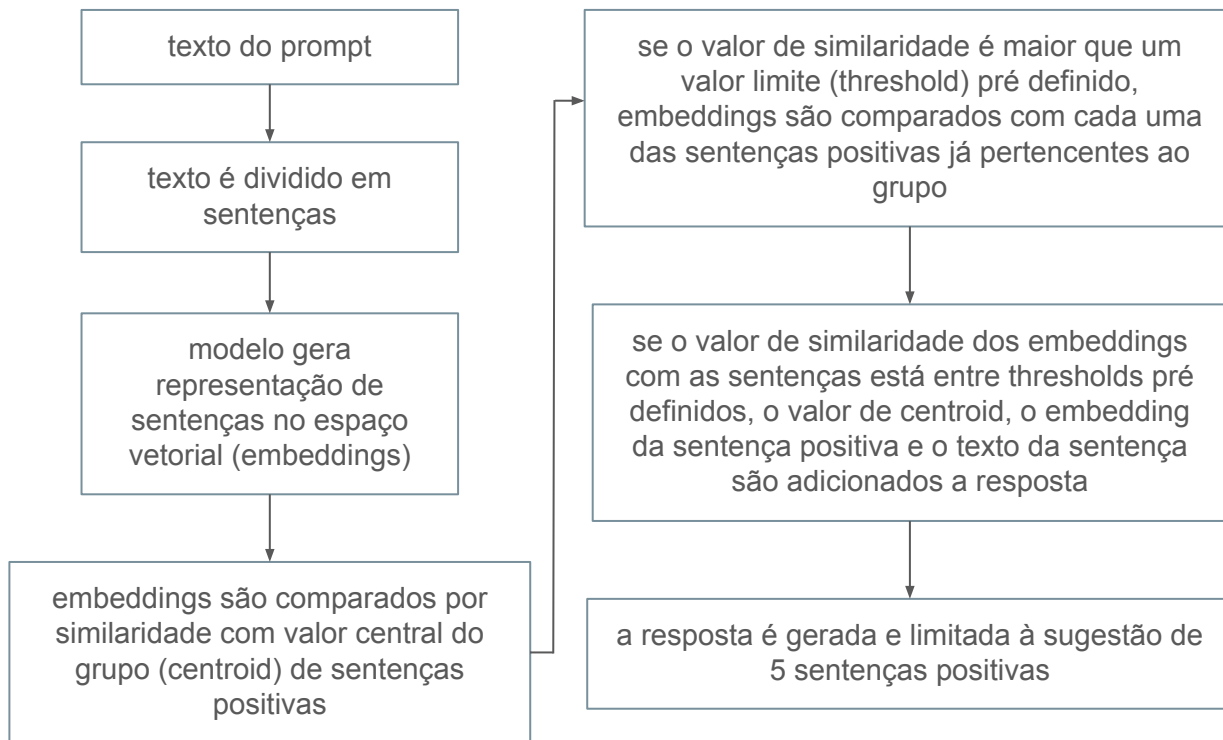

Nosso repositório

github.com/IBM/responsible-prompting-api

 **README**  Code of conduct  Apache-2.0 license  Security  

build passing license Apache 2.0

Responsible prompting API

Responsible Prompting is an [AI Alliance affiliated project](#) providing an LLM-agnostic lightweight prompt recommender that dynamically supports users in crafting prompts that embed social values and avoid harmful prompts.

This Responsible Prompting API is composed of a `Flask server` that hosts the `recommend`, `recommend_local`, `get_thresholds` routes, the `swagger` files and a responsible prompting `demo`. You can run the server locally to execute requests and obtain responsible prompting recommendations according to `swagger` description.

1. [Getting started](#)
2. [Customizing recommendations to your use case](#)
3. [Roadmap](#)
4. [Repo file structure](#)
5. [Contribute](#)
6. [License](#)
7. [Contributors](#)
8. [Citing the project](#)

Getting started

First, make sure you have:

- A machine with python 3.9 installed
- A Hugging Face access token: <https://huggingface.co/docs/hub/en/security-tokens>

Start the server:

1. In your terminal, clone this repository and `cd` into `responsible-prompting-api` folder
2. Create a virtual environment with `python -m venv <name-of-your-venv>`
3. Activate your virtual environment with `source <name-of-your-venv>/bin/activate`
4. Execute `pip install -r requirements.txt` or `python -m pip install -r requirements.txt` to install

Contribuindo para o projeto

1. Ter conta no Github
2. Escolher ou criar uma issue
3. Fazer o fork
4. Fazer o clone
5. Alterar o código
6. Submeter um PR

Contribuindo para o projeto

sugestões para pessoas que querem [chegar de fininho](#)

- adicionar sentenças diretamente no arquivo json de sentenças
- escrever mais testes (pytest)

sugestões para pessoas que querem [dar um oi geral](#)

- realizar melhorias na interface (html, javascript, jquery)
- realizar melhorias na API (python flask)

sugestões para pessoas que querem [curtir a festa](#)

- criar as versões de sentenças com embeddings para português
- obter mais valores de limites (thresholds) para outros modelos

muito obrigada e até 

 @cassiasamp

 @cassiasamp

 @cassiasamp