


```
cydui::components::  
component_base_t::add  
_event_listeners
```

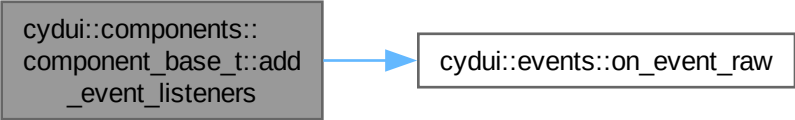

```
graph LR; A["cydui::components::  
component_base_t::add  
_event_listeners"] --> B["cydui::events::on_event_raw"]
```

A diagram illustrating a function call. On the left, a gray rectangular box contains the text `cydui::components::component_base_t::add_event_listeners`. A blue arrow points from the right side of this box to the right side of a white rectangular box on the right. The white box contains the text `cydui::events::on_event_raw`.

```
cydui::events::on_event_raw
```