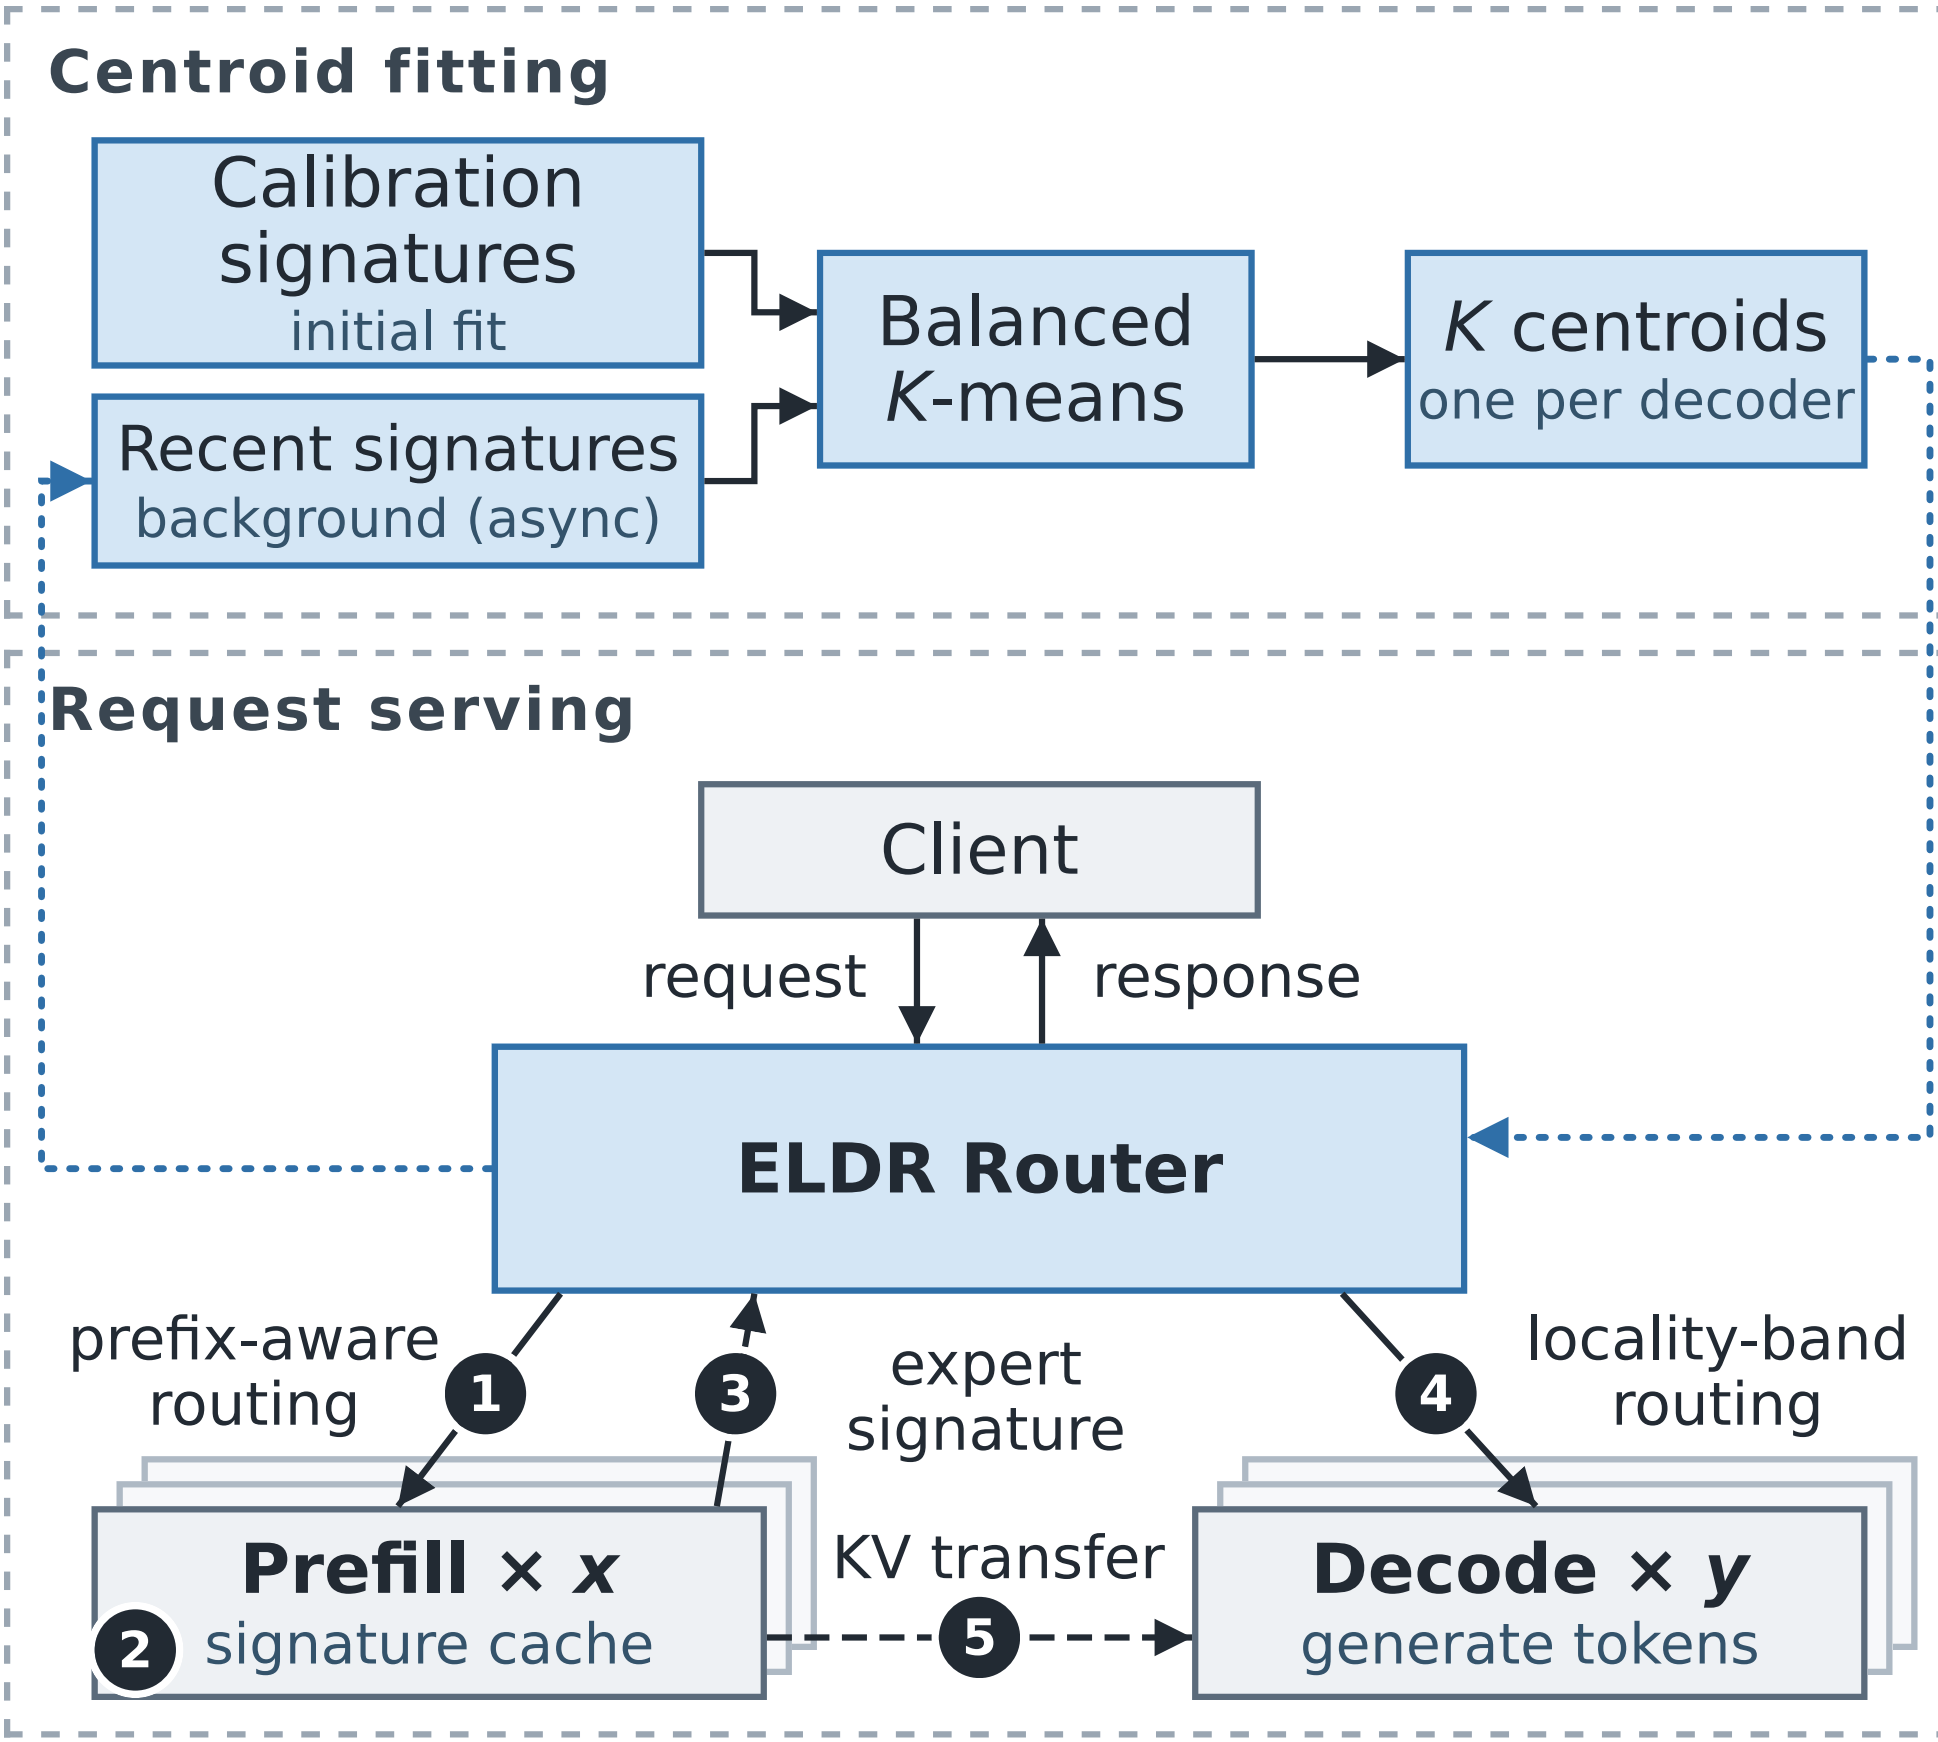
Centroid fitting
Calibration signatures
initial fit
Recent signatures
background (async)
Balanced K-means
K centroids
one per decoder
Request serving
Client
request
response
ELDR Router
prefix-aware routing
1
3
expert signature
4
locality-band routing
Prefill × x
2
signature cache
KV transfer
5
Decode × y
generate tokens