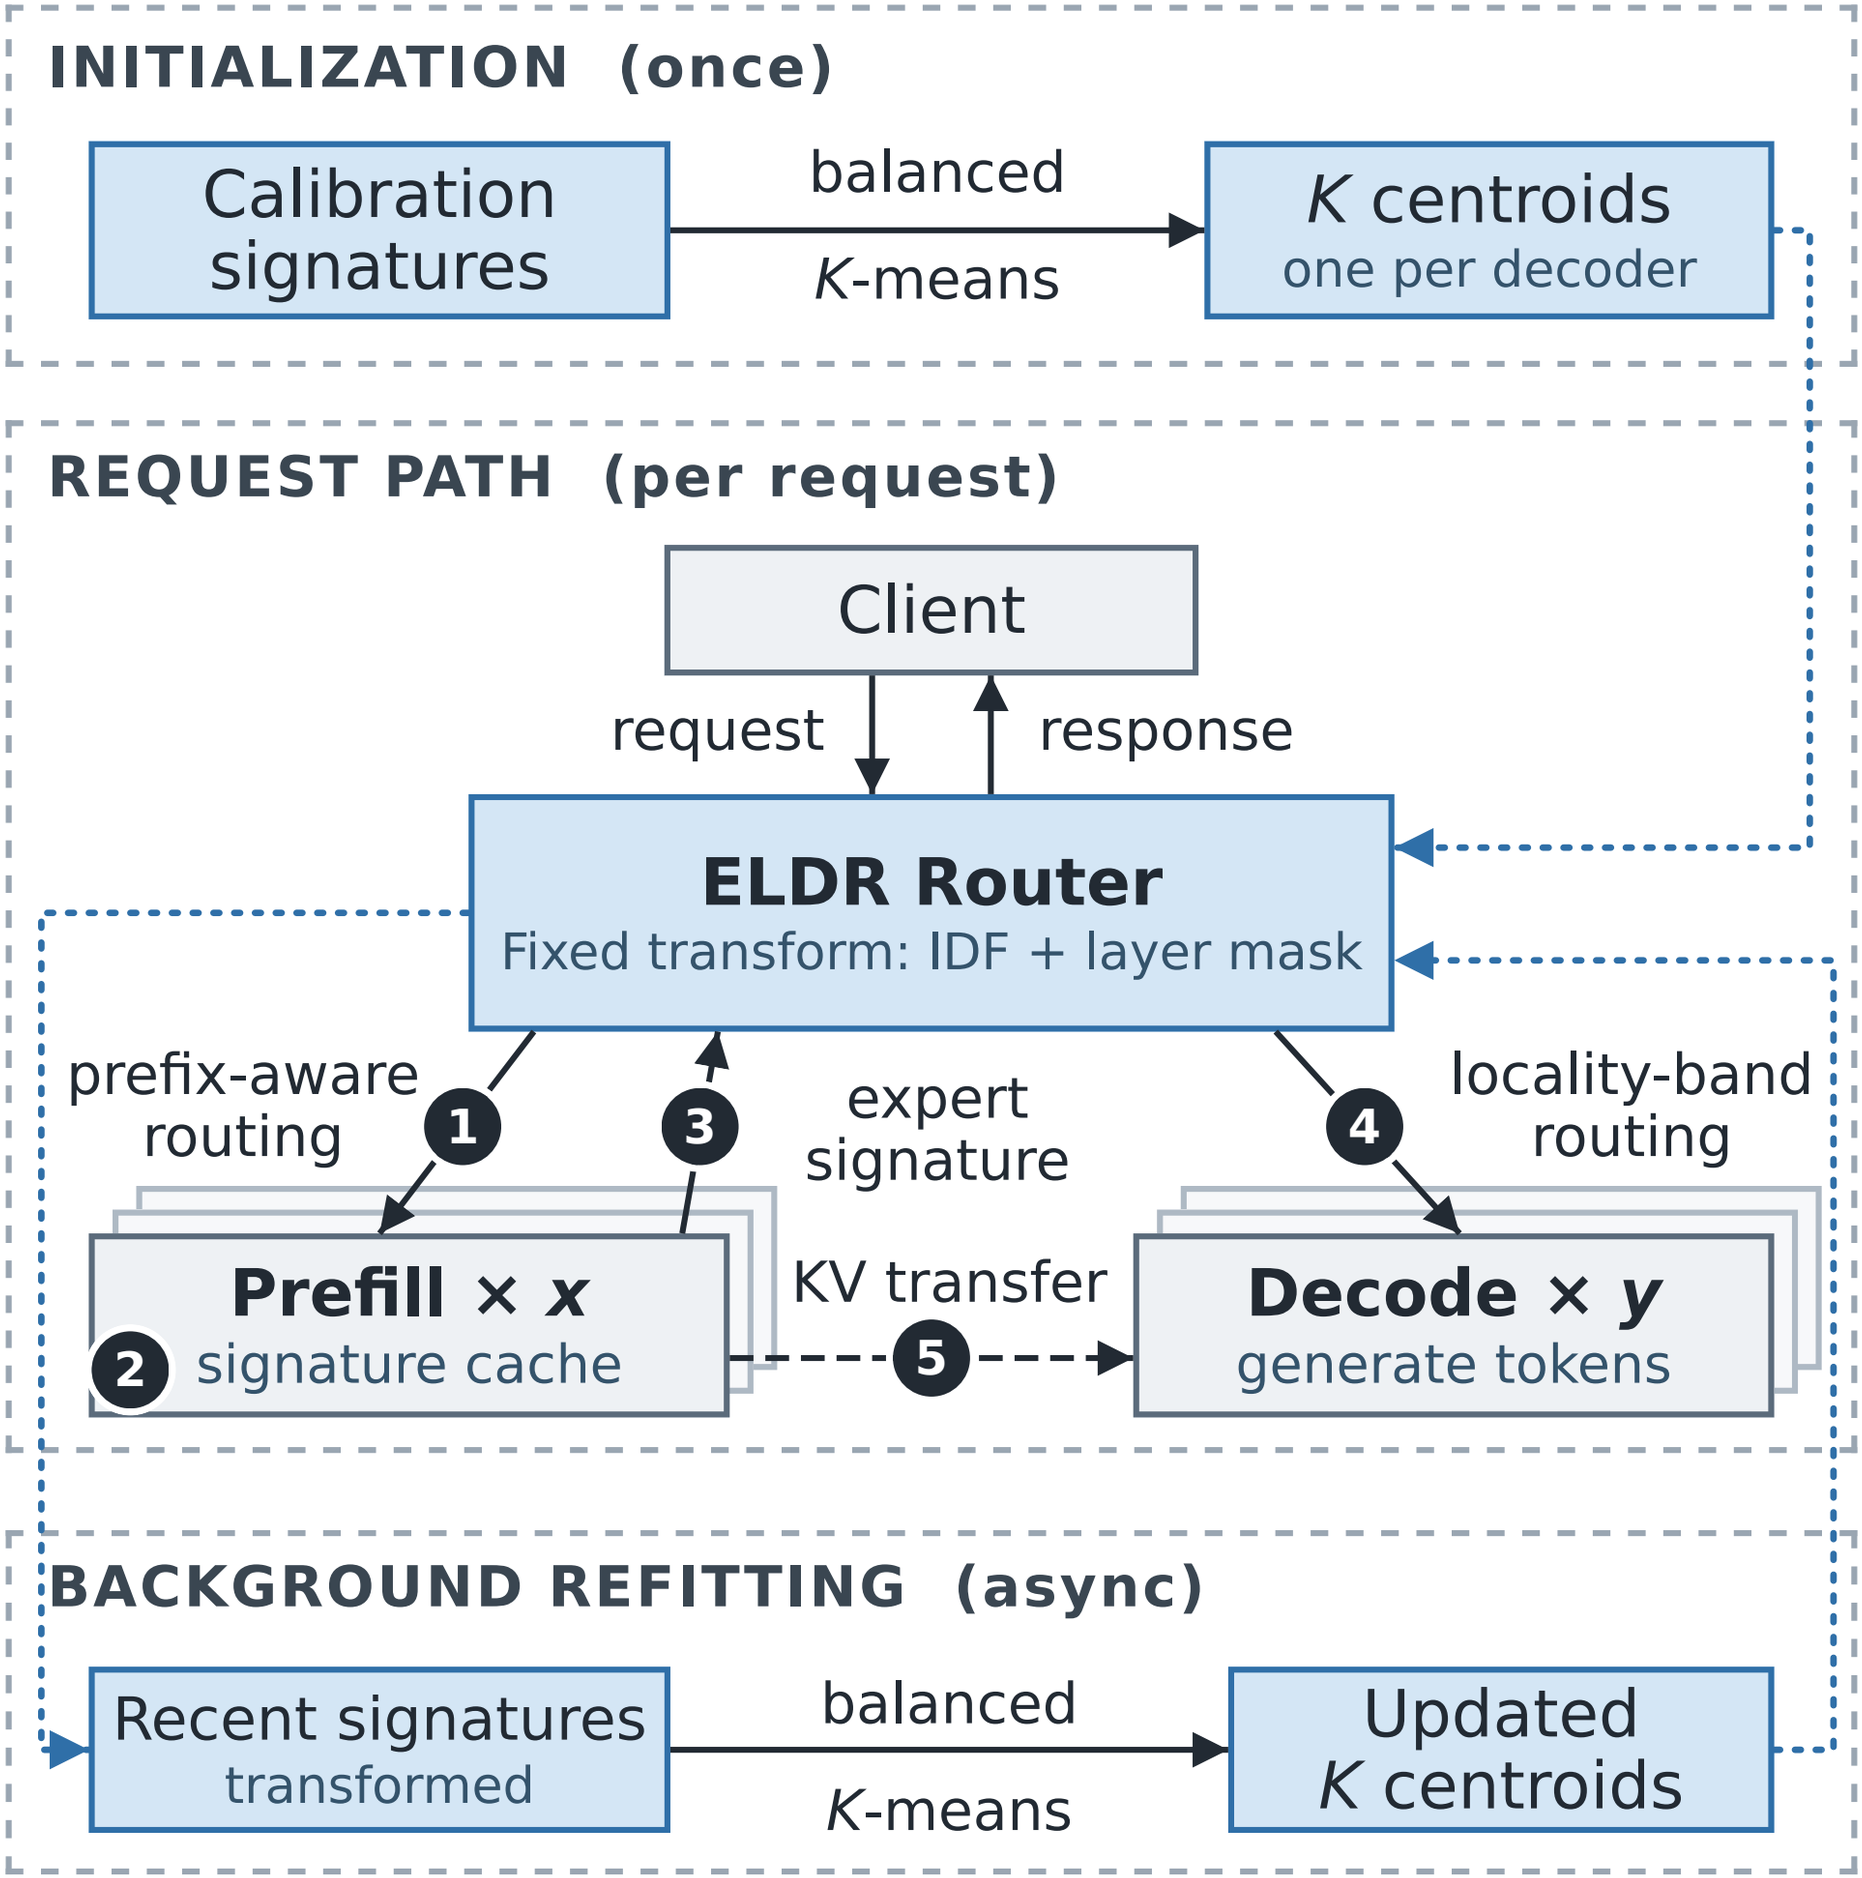
INITIALIZATION (once)
Calibration signatures
balanced
K-means
K centroids
one per decoder
REQUEST PATH (per request)
Client
request
response
ELDR Router
Fixed transform: IDF + layer mask
prefix-aware routing
1
3
expert signature
4
locality-band routing
Prefill × x
2
signature cache
KV transfer
5
Decode × y
generate tokens
BACKGROUND REFITTING (async)
Recent signatures
transformed
balanced
K-means
Updated K centroids