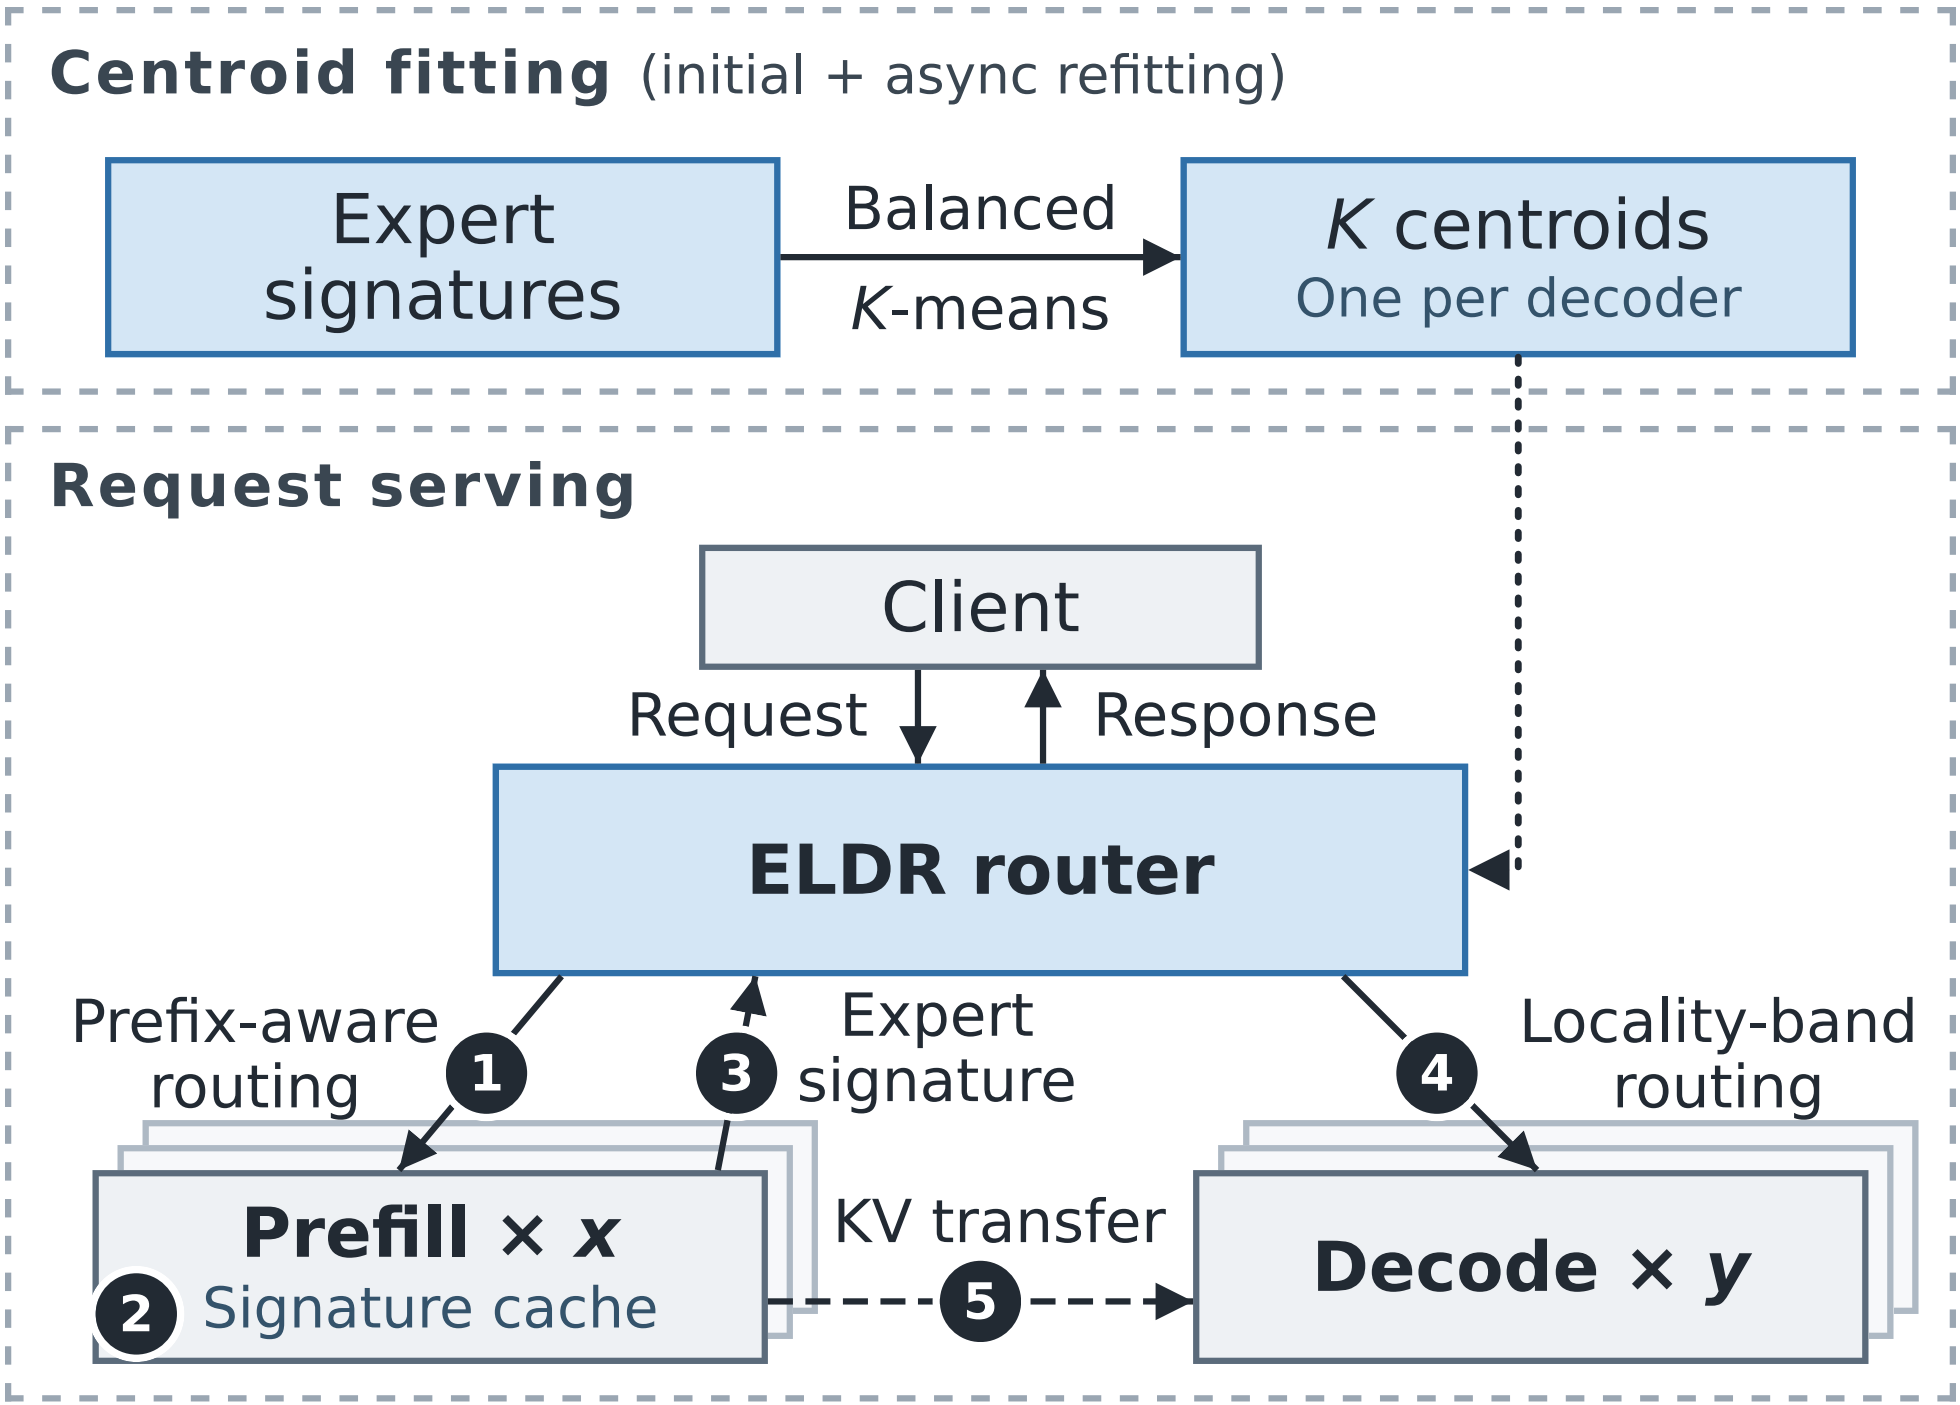
Centroid fitting (initial + async refitting)
Expert signatures
Balanced
K-means
K centroids
One per decoder
Request serving
Client
Request
Response
ELDR router
Prefix-aware routing
1
3
Expert signature
4
Locality-band routing
Prefill × x
2
Signature cache
KV transfer
5
Decode × y