
**Store poisoning chain** (V6) relative to: repos with stores

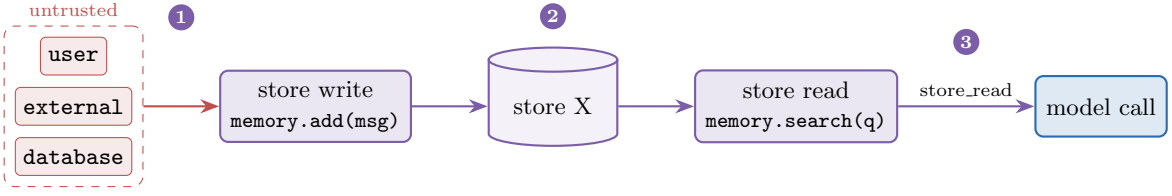


**1** find every store that receives a write with an untrusted source (a store is identified by where its object is created);
**2** find the read sites of exactly those stores;
**3** the repository matches if a model call has a `store_read` source pointing to one of those read sites.