


1391 – Speed Zones

Suppose you are in a **2-Dimensional** world. Now, you are in a system of '**N**' parallel zones of **same** or **different speed**, numbered from **0** to **N-1**. In each zone you can move in some given constant speed (**S_i** amount per second in **ith** zone) at any direction. Each zone is parallel to **X** axis, starting from the **X** axis (and then on the positive **X** and positive **Y** part only). Width of each zone is **100** (along the **Y** axis).

You are currently in the origin $(0, 0)$. You need to reach $(100 \cdot N, D)$ coordinate. But, you want to do that in minimum possible time (seconds).

Here is an example with **N = 4**, and **D = 350**. The arrows show a **possible path** from **(0, 0)** to **(400, 350)**. Note that after the end of each zone (except the last one), it is possible that you may be in an **non-integer 'X'** coordinate.

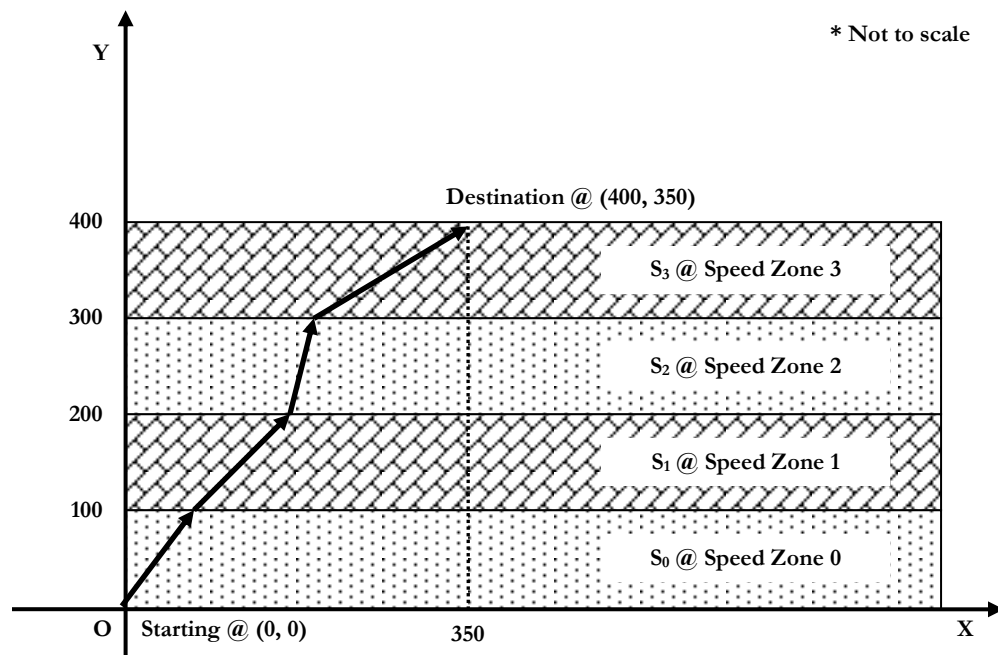

Given **N**, **D**, and the speeds **S**₀, **S**₁, **S**₂, ..., **S**_{N-1} you will need to find the minimum possible time in seconds to reach the destination point.

Input

Input starts with an integer T (≤ 50), denoting the number of test cases.

Each case contains two lines. In the **first** line you will be given two integers **N** ($1 \leq N \leq 100$) and **D** ($0 \leq D \leq 10000$). In the **second** line you will be given **N** integers, the speeds, in the order: $S_0, S_1, S_2, \dots, S_{N-1}$. You can assume that $1 \leq S_i \leq 1000$ for all $0 \leq i < N$.

Output

For each case, print the case number and the minimum possible time in seconds. Error less than 10^{-6} will be ignored.

Sample Input	Output for Sample Input
2 1 0 50 3 400 10 10 10	Case 1: 2 Case 2: 50.00000000