

FINAL REVIEW

COMPUTER SCIENCE MENTORS 61A

November 28 to December 2, 2016

1 Nonlocal


1. Draw the environment diagram for the following code snippet:

```
def one(two):  
    three = two  
    def four(five):  
        nonlocal three  
        if len(three) < 1:  
            three.append(five)  
            five = lambda x: four(x)  
        else:  
            five = seven + 7  
        return five  
    two = two + [1]  
    seven = 8  
    return four(three)
```

```
eight = one([])  
print(eight(9))
```

2 Recursive Data Structures

2. DoubleTree hired you to architect one of their hotel expansions! As you might expect, their floor plan can be modeled as a tree and the expansion plan requires doubling each node (the patented double tree floor plan). Here's what some sample expansions look like:

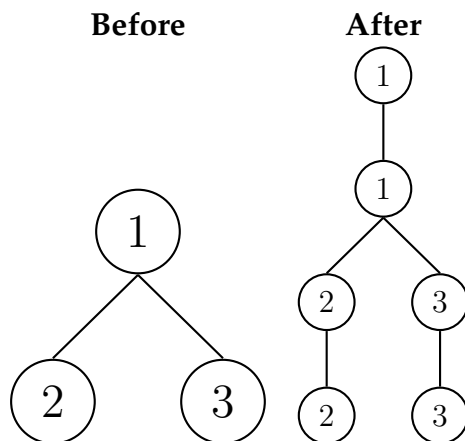

Fill in the implementation for `double_tree`.

```
def double_tree(t):
    """
    Given a tree, return a new tree where entries appear
    twice.
    >>> double_tree(Tree(1))
    Tree(1, [Tree(1)])
    >>> double_tree(Tree(1, [Tree(2), Tree(3)]))
    Tree(1, [Tree(1, [Tree(2, [Tree(2)]),
                        Tree(3, [Tree(3)])
                    ]])
    """
```

3. Fill in the implementation of `double_link`.

```
def double_link(lst):
    """
    Using mutation, replaces the second in each pair of items
    with the first. The first of each pair stays as is.
    >>> double_link(Link(1, Link(2, Link(3, Link(4)))))
    Link(1, Link(1, Link(3, Link(3))))
    >>> double_link(
        Link('c', Link('s', Link(6, Link(1, Link('a')))))
    )
    Link('c', Link('c', Link(6, Link(6, Link('a')))))
    """
    if _____:
        return _____
    _____
    return _____
```

4. Fill in the implementation of `shuffle`.

```
def shuffle(lst):
    """
    Swaps each pair of items in a linked list.
    >>> shuffle(Link(1, Link(2, Link(3, Link(4)))))
    Link(2, Link(1, Link(4, Link(3))))
    >>> shuffle(
        Link('s', Link('c', Link(1, Link(6, Link('a')))))
    )
    Link('c', Link('s', Link(6, Link(1, Link('a')))))
    """
    if _____:
        return _____
    new_head = lst.rest
    lst.rest = _____
    return _____
```

3 Scheme

5. Write a Scheme function `insert` that creates a new list that would result from inserting an item into an existing list at the given index. Assume that the given index is between 0 and the length of the original list, inclusive.

Extra: Write this as a tail recursive function. Assume `append` is tail recursive.

```
(define (insert lst item index)
```

4 Interpreters

6. Circle the number of calls to `scheme_eval` and `scheme_apply` for the code below.

```
(define (square x) (* x x))  
(+ (square 3) (- 3 2))
```

Calls to <code>scheme_eval</code> (circle one)	2	5	14	24
Calls to <code>scheme_apply</code> (circle one)	1	2	3	4

5 Recursive Select in SQL

7. Create a `mod_seven` table that has two columns, a number from 0 to 100 and then its value mod 7.

Hint: You can create a table first with all of the initial data you will build from, and then build the `mod_seven` table.

6 Iterators, Generators, and Streams

8. What Would Python Output?

```

class SkipMachine:
    skip = 1
    def __init__(self, n=2):
        self.skip = n + SkipMachine.skip

    def generate(self):
        current = SkipMachine.skip
        while True:
            yield current
            current += self.skip
            SkipMachine.skip += 1

p = SkipMachine()
twos = p.generate()
SkipMachine.skip += 1
twos = p.generate()
threes = SkipMachine(3).generate()

```

Expression	Interactive Output
<code>next(twos)</code>	
<code>next(threes)</code>	
<code>next(twos)</code>	
<code>next(twos)</code>	
<code>next(threes)</code>	
<code>next(twos2)</code>	

9. Write a generator that will take in two iterators and will compare the first element of each iterator and yield the smaller of the two values.

```
def interleave(iter1, iter2):  
    """  
    >>> gen = interleave(iter([1, 3, 5, 7, 9]),  
                           iter([2, 4, 6, 8, 10]))  
  
    >>> for elem in gen:  
    ...     print(elem)  
    ...  
    1  
    2  
    3  
    4  
    5  
    6  
    7  
    8  
    9  
    """
```

10. Food Planning Scheme

- (a) You and your 61A friends are cons. You cdr'd just studied for the final, but instead you scheme to drive away across a stream in a car during dead week. Of course, you would like a variety of food to eat on your roadtrip.

Write an infinite stream that takes in a list of foods and loops back to the first food in the list when the list is exhausted.

Bonus: Count all the puns in this question!

(define (food-stream foods)

- (b) We discover that some of our food is stale! Every other food that we go through is stale, so put it into a new stale food stream. Assume `is-stale` starts off at 0.

(define (stale-stream foods is-stale)