

# No Need to be Frightened of js in Processing.js

## About This Reference

This write-up was written to help explain what the code does not. While it includes all the code and resource links, a document is not a good place to check out the results of a program or to click on web links. Please see the [index.html](#) file instead as it will link to all the examples below and provide links to the listed resources.

## Background

The Processing Language was created by Ben Fry and Casey Reas at MIT in the year 2000. It's goal was to simplify graphics programming for people who did not have a really strong programming background.

*"Processing is an open source programming language and environment for people who want to create images, animations, and interactions. Initially developed to serve as a software sketchbook and to teach fundamentals of computer programming within a visual context, Processing also has evolved into a tool for generating finished professional work." -- Processing.org*

Processing is Java based. The programs written using Processing (called sketches) were deployed as an applet. When the language was first created, Java was expected to be come the client side programming language of the web (applets everywhere!). However, that is not what happened. Initializing and sandboxing the JVM takes time and Java plug-ins are often out of date or disabled. On some platforms plug-ins are not even an option (iOS for example).

When Processing was created, JavaScript was not very fast. It was viewed as a language that you could use to change a bit of content here and there but nothing serious. However, over the last decade JavaScript has gotten amazingly fast. It is the *lingua franca* of the web, understood by all the major browsers and across every platform whether it is desktop or mobile. Today, there are serious applications being developed using JavaScript in domains that were once thought to be desktop only.

Processing.js was a project initiated in 2008 by John Resig who also started JQuery. He wanted to try to write something that used the <canvas> element. Thus, he started Processing.js which would translate Processing code into JavaScript and render it using in the <canvas> element. He proved that it was possible to do this and released his work as an open source project called Processing.js.

In the fall of 2009, a group of students from Seneca College led by their Professor David Humphrey began the job of bringing Processing.js to parity with Processing as part of their open source course. Over the next year, they along with a few other outside contributors, added all the 3D functionalities of Processing.js, fixed many bugs, increased its efficiency and tested the code over multiple platforms. In 2010, Processing.js 1.0 was release. Today, Processing.js is at version 1.4 and is maintained by a group of volunteers

## **An Introduction to the Processing Language**

This section is for those who have never used the Processing Language before. If you are comfortable with Processing, please feel free to jump ahead to the next section.

I have made all sketches below are available at:

**<http://seneca-cdot.sketchpad.cc>**

Please feel free to sign-up, clone and alter it. You are also welcome to copy them and use it for your own class. If you wish to set up a private studio for your class, you can contact studio sketchpad and they will make one for you.

The Processing Language is Java based and thus it essentially follows the same basic syntactic rules as Java. While it is possible to create objects, it does not have to be written in an object-oriented manner. It is possible to write an entire sketch without objects.

The Processing Language has a fairly large library of functions that draws/alters basic shapes. It would not be possible to fully cover them all in this workshop. Please refer to the reference pages on these functions and their usage:

**<http://processingjs.org/reference/>**

NOTE: I am including the Processing.js reference instead of the Processing reference here. For the most part there aren't any major differences between them however, there are some functionalities that are not implemented for Processing.js (mostly related to files which do not make sense in a web context). It is best to be aware of this and avoid their usage.

## Syntax Quick Reference

Remember that when in doubt, processing.js follows java syntax rules. For those unfamiliar with java, I have included a quick guide on basic syntactic elements:

Variable declarations:

```
<data type> <variable name> ;
```

example:

```
int x;
```

If statement

```
if (<some condition>) {  
    //do this if <some condition>is true  
}  
else{  
    //do this if <some condition> is false  
}
```

while loops

```
while(<some condition>){  
    //do this as long as <some condition remains true>  
}
```

for loops


```
for(<initialization>;<some condition>;<loop increment>){  
    //do this as long as some condition is true  
}
```

## Workshop Example 1: A Simple Sketch

```
size(500,300);           //sets the size of the sketch
                           //500 px wide, 300 px tall

ellipse(250,150,200,200); //draws a 200px diameter circle in the
                           //middle of the sketch.
                           //ellipse(x,y,width,height)
```

The Processing coordinate system places 0,0 at the top left corner with increases values of x and y. The bottom right corner will therefore have coordinates equal to the size of the sketch. If you are trying to simply create an image programmatically you can do so simply by typing in the api commands to draw what you wish

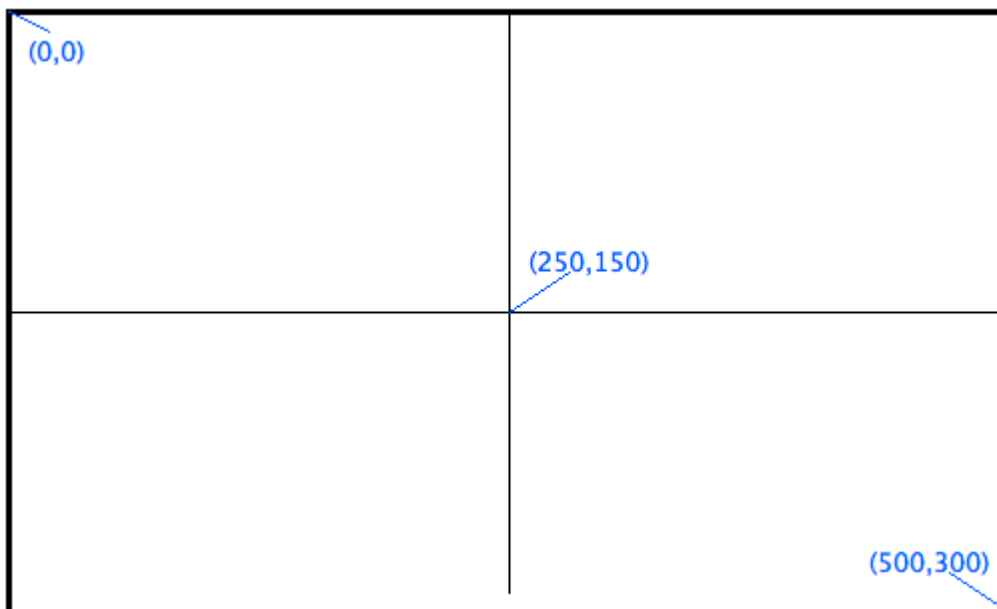

## Colours

Processing allows you to specify colours in different ways depending if you want greyscale, opaque colours or colours with transparency.

- greyscale: specified with a single value - 0 is black, 255 is white
- opaque colours: specified as 3 values for amount of red, green and blue light. This web resource may be useful to find the colour you want: <http://cloford.com/resources/colours/500col.htm>
- colours with alpha: same as opaque colours but also includes a 4th value for transparency. 0 is completely transparent, 255 is completely opaque

## Animations

The examples thus far have been to draw using Processing's drawing functions. However, Processing not only allows you to draw an image programmatically but it also allows you to create animations. To do this, there are two main functions:

`void setup()` - a function that is called once when the sketch is first loaded

`void draw()` - a function that is called once every frame. To create an animation, you can use variables to control how something is drawn in each frame

### Workshop Example 2: Animation

```
//Walk sequence animation
//Art work by "TheZakMan" at OpenGameArt.org
//http://opengameart.org/content/plataform-walk-jump-animation-side-view
//Licenced under CC-BY 3.0 license
/*@pjs preload="data/walk01.png, data/walk02.png, data/walk03.png,
                data/walk04.png, data/walk05.png, data/walk06.png,
                data/walk07.png, data/walk08.png, data/walk09.png,
                data/walk10.png, data/walk11.png, data/walk12.png,
                data/walk13.png, data/walk14.png, data/walk15.png,
                data/walk16.png, data/walk17.png, data/walk18.png,
                data/walk19.png, data/walk20.png, data/walk21.png,
                data/walk22.png, data/walk23.png, data/walk24.png,
                data/walk25.png, data/walk26.png, data/walk27.png,
                data/walk28.png, data/walk29.png, data/walk30.png,
                data/walk31.png"; */

PImage [] walk = new PImage[31]; //31 frames in the walk cycle
int sequenceid=0;

void setup(){
  size(500,500);
  for(int i=0;i<31;i++){
    walk[i]=loadImage("data/walk"+(i<9?"0":"") + (i+1) + ".png");
  }
  imageMode(CENTER);
}

void draw(){
  background(255);
  image(walk[sequenceid], width/2, height/2);
  sequenceid++;
  if(sequenceid==31)
    sequenceid=0;
}
```

### Workshop 3: Simple mouse interaction

```
//this sketch draws a circle every time you click the mouse

/*A simple class that stores info needed to redraw all circles*/
class Circle{
    float x_, y_;
    float radius_;

    Circle(float x,float y, float r){
        x_=x;
        y_=y;
        radius_=r;
    }
    void draw(){
        ellipse(x_,y_,radius_,radius_);
    }
}

boolean spawnCircle=false;           //this variable is true if mouse
                                     //was clicked

Circle [] circleList=new Circle[50]; //Create an array of Circle
                                     //References

int numCircles=0;                    //number of Circles in list

void setup(){
    size(500,500);
}
void draw(){
    background(255);

    //if the mouse had been clicked, create a new circle
    if(spawnCircle==true){
        if(numCircles<50){
            circleList[numCircles]=new
                Circle(random(10,490),random(10,490),random(50,100));
            numCircles++;
        }
        spawnCircle=false;
    }

    //draw the circles
    for(int i=0;i<numCircles;i++){
        circleList[i].draw();
    }
}

/*
    Function gets called once, as soon as the
    mouse button is pressed. It sets the spawnCircle variable
    to true
*/
void mousePressed(){
    spawnCircle=true;
}
}}
```

This workshop barely scratches the surface of what is possible with the Processing Language. If you wish to learn more there are several books on Processing available and their website is a great resource with lots of examples of what people have done with it.

## How to put your sketch on a web page

Once you have a Processing Sketch, adding it to a web page is a fairly simple process. The processing sketch is rendered using `<canvas>`. Follow these steps to place it on a page:

1) download processing.js from the Processing.js site (<http://processingjs.org> ). You can use either the development or production version. The difference is that the development version allows you to read the processing.js code that does the actual translation while the minified version has been obfuscated. For the most part, it is better to use the minified version unless you are trying to contribute to the Processing.js project.

2) put your sketch, html file and processing.js file into one directory. Suppose that they are named as follows:

- processing.js (the file you download from processingjs.org renamed)
- mys sketch.pde (the processing sketch)
- index.html (the html file)

3) create your index.html file as follows

```
<html>
  <head>
    <script src="processing.js"></script>
  </head>
  <body>
    <canvas data-processing-source="mysketch.pde"></canvas>
  </body>
</html>
```

If you have more than one file, you can list them all inside the " ".

For example

```
<html>
  <head>
    <script src="processing.js"></script>
  </head>
  <body>
    <canvas data-processing-source="file1.pde file2.pde"></canvas>
  </body>
</html>
```

## How to control your sketch from web page

It is possible to control a Processing.js sketch using HTML controllers like buttons. All you need to do is provide a function that can be called from your controller.

### Workshop4:

```
<html>
<head>
  <script src="../../../processing.js"></script>
</head>

<body>
<div style="margin: 10px; padding: 5px">
<button onclick="addAPiece(0)" style="width:65px">1</button>
<button onclick="addAPiece(1)" style="width:65px">2</button>
<button onclick="addAPiece(2)" style="width:65px">3</button>
<button onclick="addAPiece(3)" style="width:65px">4</button>
<button onclick="addAPiece(4)" style="width:65px">5</button>
<button onclick="addAPiece(5)" style="width:65px">6</button>
<button onclick="addAPiece(6)" style="width:65px">7</button>
</div>
<canvas id="sketch" data-processing-sources="workshop4.pde"></canvas>
<script type="application/javascript">
  function addAPiece(col){
    var processingInstance;
    if (!processingInstance) {
      processingInstance =
Processing.getInstanceById('sketch');
    }
    processingInstance.doAdd(col);

  }
</script>
</body>
</html>
```

In the sketch workshop4.pde there is a function called doAdd(). The web page simply needs to associate the function with the appropriate sketch and make the function call.



## Workshop 5:

Video driven animation. This is another example of how using processing.js allows for better interaction between existing web technologies. In this example, we will look at how to mashup a video and processing.js sketch.

In the folder for workshop5 you will find 2 videos (which you can feel free to replace with whatever video you want...please note, these 2 videos are not uploaded to the github repo as videos in repos tend to become problematic). the walk cycle animation sketch and an html file. You will also find a js library called popcorn.js (and the processing.js addon for popcorn.js)

Popcorn.js allows us to use the time information of the video to drive contents of the web page. We can essentially start a sketch at some point in the video and stop it at some other point. If we then overlay the canvas onto the video, we can create a processing.js animation that sits on top of the video.

In the youtubeDemo folder, I have included a demo of doing this using a youtube video but it does require that you run the demo through a web server which is not available to us for our workshop. However, feel free to try it out (it will work if you serve it through a web server as opposed to a file uri)

```

<!doctype html>
<html>
  <head>
    <link rel="stylesheet" href="styles.css" type="text/css">
    <script src="../processing.js"></script>
    <script src="popcorn-complete.min.js"></script>
    <script src="popcorn.processing.js"></script>
    <script>
      // Helper function to get elements
      function element(id) {
        return document.getElementById(id);
      }

      document.addEventListener( 'DOMContentLoaded', function() {
        var paused = true,
            popcorn;

        popcorn = Popcorn('#video');

        popcorn = popcorn
          .processing({
            start: 5, // seconds
            end: 20, // seconds
            sketch: 'walk.pde',
            target: 'animation'
          });

        }, false );
    </script>
  </head>
  <body>
    <div style="width: 640px; height: 400px;">
    <video id='video' controls
      width= '640px'
      height= '400px'>
      <source id='mp4'
        src="rapids.mp4"
        type='video/mp4; codecs="avc1, mp4a"'>
      <source id='ogv'
        src="rapids.ogv"
        type='video/ogg; codecs="theora, vorbis"'>
      <p>Your user agent does not support the HTML5 Video element.</p>
    </video>
    <div id="animation" style="border: 0px; width: 640px; height:
360px; position: absolute; z-index: 10;top:0;left:0;"></div>
    </div>
  </body>
</html>

```

## Resources

Resource Name URL/Location	Description
Processing.js website <a href="http://processingjs.org">http://processingjs.org</a>	This is the place to get the latest version of Processing.js. It has links to many resources on Processing.js including many examples.
Processing website <a href="http://processing.org">http://processing.org</a>	This is Processing's home page. A good online resources with many examples of how to create processing sketches starting from the very beginning. This is where you can get the Processing IDE (NOTE that since the 2.0 alpha release actually lets you publish a sketch as processing.js directly from the IDE. pre 2.0, you would have to create the html separately by hand)
Studio Sketchpad <a href="http://sketchpad.cc">http://sketchpad.cc</a>	An online tool that allows multiple people to work on a sketch together and immediately share the results. It is based on etherpad. If you want to use it for teaching, you can even ask them to setup a private studio for you
Follow Processing.js on twitter: @Processingjs	Processing.js is an open community and twitter is the best way to follow its happenings. Since much of the development was done at Seneca, there is a large community in Toronto and with regular in-person meetups.
Bug Tracker <a href="https://processing-js.lighthouseapp.com">https://processing-js.lighthouseapp.com</a>	If you find a bug with Processing.js please report it to their bug tracker here.
IRC Channel <a href="irc://moznet">irc://moznet</a> , channel #processingjs	The IRC channel where Processing.js devs hang out. The community is quite active and you will often be able to find help here.
Mike "Pomax" Kamermans's Processing.js Super Mario Tutorial  <a href="http://processingjs.nihongoresources.com/test/PjsGameEngine/docs/tutorial/mario.html">http://processingjs.nihongoresources.com/test/PjsGameEngine/docs/tutorial/mario.html</a>	This tutorial shows how to build a Super Mario level using a game engine made with Processing.js
Khan Academy Computer Science <a href="http://www.khanacademy.org/cs/tutorials/all-tutorials">http://www.khanacademy.org/cs/tutorials/all-tutorials</a>	This site includes video tutorials and a programming environment right in the browser.

continued on next page

<p>Popcorn.js  <a href="http://popcornjs.org/">http://popcornjs.org/</a></p>	<p>Popcorn.js is a JavaScript library that allows time based media to control the contents of a web page.</p>
<p>Processing.js for windows/windows phone   <a href="http://channel9.msdn.com/Series/Sketchbooktutorial/Introducing-Creative-Coding-and-ProcessingJS-With-Windows">http://channel9.msdn.com/Series/Sketchbooktutorial/Introducing-Creative-Coding-and-ProcessingJS-With-Windows</a></p>	<p>Microsoft has released a slightly different version of processing.js for windows/windows windowsphone. More information can be found at link</p>