Domain Theory in Lean 4

Lars Warren Ericson[†], **Dana S. Scott**, **Vijay D'Silva**[‡], **Brian Milnes**[§]

October 2026
CMU-CS-26-140

School of Computer Science
Carnegie Mellon University
Pittsburgh, PA 15213

[†] Catskills Research Company, [‡] Google Research, [§] Unaffiliated

Keywords: Lean 4; formal verification; domain theory; continuous lattices; neighbourhood systems; information systems; Scott topology

Abstract

This document is a machine-checked Lean 4 formalization of Dana Scott's papers on domain theory: continuous lattices (1972), datatypes as lattices (1976), neighbourhood systems (1980), and information systems (1982), together with bridge theorems relating the three presentations. Each note in the source tree is included in reading order from `DomainTheory.md`.

Contents

1 Continuous Lattices **22**

2 Data types as lattices **24**

2.1 Introduction . . . 24
2.1.1 Historical note . . . 26
2.2 Continuous functions . . . 26
2.3 Introduction . . . 26
2.3.1 Motivation . . . 28
2.3.2 Historical note . . . 29
2.4 e . . . 29
2.4.1 AI: Human-English to AI-Lean . . . 29
2.4.2 AI: AI-Lean to AI-English . . . 29
2.5 pair . . . 29
2.5.1 AI: Human-English to AI-Lean . . . 29
2.5.2 AI: AI-Lean to AI-English . . . 29
2.6 Continuous . . . 29
2.6.1 AI: Human-English to AI-Lean . . . 29
2.6.2 AI: AI-Lean to AI-English . . . 31
2.7 Definition . . . 31
2.8 Definition . . . 31
2.9 Theorem 1.1 . . . 31
2.9.1 Human-English . . . 31
2.9.2 AI: Human-English to AI-Lean . . . 32
2.9.3 AI: AI-Lean to AI-English . . . 32
2.9.4 AI: AI-English to Human-English Concordance . . . 32
2.10 Graph . . . 32
2.10.1 AI: Human-English to AI-Lean . . . 32
2.10.2 AI: AI-Lean to AI-English . . . 33
2.11 Definition . . . 33
2.12 Theorem 1.2 . . . 34
2.12.1 Human-English . . . 34
2.12.2 AI: Human-English to AI-Lean . . . 34
2.12.3 AI: AI-Lean to AI-English . . . 34
2.12.4 AI: AI-English to Human-English Concordance . . . 34
2.13 FixedPoint . . . 34
2.13.1 AI: Human-English to AI-Lean . . . 35
2.13.2 AI: AI-Lean to AI-English . . . 35
2.14 Theorem 1.3 . . . 35
2.14.1 Human-English . . . 35
2.14.2 AI: Human-English to AI-Lean . . . 36
2.14.3 AI: AI-Lean to AI-English . . . 36
2.14.4 AI: AI-English to Human-English Concordance . . . 36
2.15 Theorem 1.4 . . . 36

2.15.1 Human-English . . . 36
2.15.2 AI: Human-English to AI-Lean . . . 36
2.15.3 AI: AI-Lean to AI-English . . . 37
2.15.4 AI: AI-English to Human-English Concordance . . . 37
2.16 Embedding . . . 37
2.16.1 AI: Human-English to AI-Lean . . . 37
2.16.2 AI: AI-Lean to AI-English . . . 38
2.17 Theorem 1.5 . . . 38
2.17.1 Human-English . . . 38
2.17.2 AI: Human-English to AI-Lean . . . 38
2.17.3 AI: AI-Lean to AI-English . . . 38
2.17.4 AI: AI-English to Human-English Concordance . . . 38
2.18 Theorem 1.6 . . . 38
2.18.1 Human-English . . . 38
2.18.2 AI: Human-English to AI-Lean . . . 38
2.18.3 AI: AI-Lean to AI-English . . . 39
2.18.4 AI: AI-English to Human-English Concordance . . . 39
2.19 Computability and definability . . . 39
2.19.1 Historical note . . . 39
2.20 Meaning . . . 39
2.20.1 Human-English . . . 39
2.20.2 AI: Human-English to AI-Lean . . . 41
2.20.3 AI: AI-Lean to AI-English . . . 42
2.21 LAMBDA . . . 42
2.21.1 Human-English . . . 42
2.21.2 AI: Human-English to AI-Lean . . . 43
2.21.3 AI: AI-Lean to AI-English . . . 48
2.22 Theorem 2.1 . . . 48
2.22.1 Human-English . . . 48
2.22.2 AI: Human-English to AI-Lean . . . 48
2.22.3 AI: AI-Lean to AI-English . . . 48
2.22.4 AI: AI-English to Human-English Concordance . . . 48
2.23 Theorem 2.2 . . . 48
2.23.1 Human-English . . . 48
2.23.2 AI: Human-English to AI-Lean . . . 48
2.23.3 AI: AI-Lean to AI-English . . . 49
2.23.4 AI: AI-English to Human-English Concordance . . . 49
2.24 Theorem 2.3 . . . 49
2.24.1 Human-English . . . 49
2.24.2 AI: Human-English to AI-Lean . . . 49
2.24.3 AI: AI-Lean to AI-English . . . 49
2.24.4 AI: AI-English to Human-English Concordance . . . 49
2.25 Theorem 2.4 . . . 49
2.25.1 Human-English . . . 49
2.25.2 AI: Human-English to AI-Lean . . . 50

2.25.3 AI: AI-Lean to AI-English . . . 50
2.25.4 AI: AI-English to Human-English Concordance . . . 50
2.26 The combinator Y . . . 50
2.26.1 Human-English . . . 50
2.26.2 AI: Human-English to AI-Lean . . . 50
2.26.3 AI: AI-Lean to AI-English . . . 51
2.27 Theorem 2.5 . . . 51
2.27.1 Human-English . . . 51
2.27.2 AI: Human-English to AI-Lean . . . 53
2.27.3 AI: AI-Lean to AI-English . . . 54
2.27.4 AI: AI-English to Human-English Concordance . . . 54
2.28 The graph model . . . 54
2.28.1 Human-English . . . 54
2.28.2 AI: Human-English to AI-Lean . . . 54
2.28.3 AI: AI-Lean to AI-English . . . 55
2.29 Elementary definitions . . . 55
2.29.1 Human-English . . . 55
2.29.2 AI: Human-English to AI-Lean . . . 56
2.29.3 AI: AI-Lean to AI-English . . . 57
2.30 Sequences . . . 57
2.30.1 Human-English . . . 57
2.30.2 AI: Human-English to AI-Lean . . . 57
2.30.3 AI: AI-Lean to AI-English . . . 59
2.31 Distributive functions . . . 59
2.31.1 Human-English . . . 59
2.31.2 AI: Human-English to AI-Lean . . . 59
2.31.3 AI: AI-Lean to AI-English . . . 61
2.32 Primitive recursion . . . 61
2.32.1 Human-English . . . 61
2.32.2 AI: Human-English to AI-Lean . . . 61
2.32.3 AI: AI-Lean to AI-English . . . 63
2.33 Definition . . . 63
2.34 Computable functions . . . 63
2.34.1 AI: Human-English to AI-Lean . . . 63
2.34.2 AI: AI-Lean to AI-English . . . 67
2.35 Definability . . . 67
2.35.1 Human-English . . . 67
2.35.2 AI: Human-English to AI-Lean . . . 67
2.35.3 AI: AI-Lean to AI-English . . . 72
2.36 Theorem 2.6 . . . 72
2.36.1 Human-English . . . 72
2.36.2 Motivation . . . 73
2.36.3 AI: Human-English to AI-Lean . . . 73
2.36.4 AI: AI-Lean to AI-English . . . 74
2.36.5 AI: AI-English to Human-English Concordance . . . 74

2.37 A law of Y . . . 74
2.37.1 Human-English . . . 74
2.37.2 AI: Human-English to AI-Lean . . . 74
2.37.3 AI: AI-Lean to AI-English . . . 75
2.38 Retracts and data types . . . 75
2.38.1 Historical note . . . 75
2.38.2 Human-English . . . 75
2.38.3 AI: Human-English to AI-Lean . . . 77
2.38.4 AI: AI-Lean to AI-English . . . 82
2.38.5 AI: AI-English to Human-English Concordance . . . 82
2.39 Closure operations and algebraic lattices . . . 82
2.39.1 Historical note . . . 82
2.39.2 Human-English . . . 82
2.39.3 AI: Human-English to AI-Lean . . . 83
2.39.4 AI: AI-Lean to AI-English . . . 90
2.39.5 AI: AI-English to Human-English Concordance . . . 90
2.40 Subsets and their classification . . . 90
2.40.1 Historical note . . . 90
2.40.2 Human-English . . . 91
2.40.3 AI: Human-English to AI-Lean . . . 92
2.40.4 AI: AI-Lean to AI-English . . . 94
2.40.5 AI: AI-English to Human-English Concordance . . . 94
2.41 Total functions and functionality . . . 94
2.41.1 Historical note . . . 94
2.41.2 Human-English . . . 95
2.41.3 AI: Human-English to AI-Lean . . . 96
2.41.4 AI: AI-Lean to AI-English . . . 113
2.41.5 AI: AI-English to Human-English Concordance . . . 113
2.42 Enumeration and degrees . . . 113
2.42.1 Historical note . . . 113
2.42.2 Human-English . . . 114
2.42.3 AI: Human-English to AI-Lean . . . 114
2.42.4 AI: AI-Lean to AI-English . . . 130
2.42.5 AI: AI-English to Human-English Concordance . . . 130

3 Neighbourhood systems 130
3.1 Introduction . . . 132
3.1.1 Human-English . . . 132
3.2 INTRODUCTION . . . 132
3.3 Domains given by neighbourhoods . . . 133
3.4 Introduction . . . 133
3.4.1 Human-English . . . 133
3.5 LECTURE I . . . 133
3.6 Definition 1.1 . . . 135
3.6.1 Human-English . . . 135
3.6.2 AI: Human-English to AI-Lean . . . 135

3.7 Factoid 1.1 . . . 135
3.7.1 Factoid 1.1a — empty intersection is delta . . . 135
3.7.2 Factoid 1.1b — recursive finite intersection . . . 135
3.7.3 AI: Human-English to AI-Lean . . . 136
3.8 Example 1.2 . . . 136
3.8.1 Human-English . . . 136
3.8.2 AI: Human-English to AI-Lean . . . 136
3.9 Example 1.3 . . . 136
3.9.1 Human-English . . . 136
3.9.2 AI: Human-English to AI-Lean . . . 137
3.10 Example 1.4 . . . 137
3.10.1 Human-English . . . 137
3.10.2 AI: Human-English to AI-Lean . . . 137
3.11 Factoid 1.4a . . . 138
3.11.1 Human-English . . . 138
3.11.2 AI: Human-English to AI-Lean . . . 138
3.12 Example 1.5 . . . 138
3.12.1 Human-English . . . 138
3.12.2 AI: Human-English to AI-Lean . . . 138
3.13 Factoid 1.5 . . . 138
3.13.1 Factoid 1.5a — consistent iff nonempty . . . 138
3.13.2 Factoid 1.5b — equivalent sequences same limit . . . 139
3.13.3 AI: Human-English to AI-Lean . . . 139
3.14 Definition 1.6 . . . 139
3.14.1 Human-English . . . 139
3.14.2 AI: Human-English to AI-Lean . . . 140
3.15 Definition 1.7 . . . 140
3.15.1 Human-English . . . 140
3.15.2 AI: Human-English to AI-Lean . . . 140
3.16 Factoid 1.7 . . . 140
3.16.1 Factoid 1.7a1 — principals are one-one . . . 140
3.16.2 Factoid 1.7a2 — inclusion-reversing principals . . . 140
3.16.3 Factoid 1.7b — union of principal filters . . . 140
3.16.4 AI: Human-English to AI-Lean . . . 141
3.17 Definition 1.8 . . . 141
3.17.1 Human-English . . . 141
3.17.2 AI: Human-English to AI-Lean . . . 141
3.18 Factoid 1.8 . . . 141
3.18.1 Factoid 1.8a1 — bottom element . . . 141
3.18.2 Factoid 1.8a2 — bottom is least . . . 141
3.18.3 Factoid 1.8b — finite filters are principal . . . 141
3.18.4 Factoid 1.8c — prefix order . . . 142
3.18.5 Factoid 1.8d — union of finite approximations . . . 142
3.18.6 AI: Human-English to AI-Lean . . . 142
3.19 Examples 1.2–1.5 (Revisited) . . . 143

3.19.1 Human-English . . . 143
3.19.2 AI: Human-English to AI-Lean . . . 143
3.20 Definition 1.9 . . . 143
3.20.1 Human-English . . . 143
3.20.2 AI: Human-English to AI-Lean . . . 144
3.21 Theorem 1.10 . . . 144
3.21.1 Human-English . . . 144
3.21.2 AI: Human-English to AI-Lean . . . 145
3.22 Theorem 1.11 . . . 145
3.22.1 Human-English . . . 145
3.22.2 AI: Human-English to AI-Lean . . . 146
3.23 Exercise 1.12 . . . 146
3.23.1 Human-English . . . 146
3.23.2 AI: Human-English to AI-Lean . . . 146
3.24 Exercise 1.13 . . . 147
3.24.1 Human-English . . . 147
3.24.2 AI: Human-English to AI-Lean . . . 147
3.25 Exercise 1.14 . . . 147
3.25.1 Human-English . . . 147
3.25.2 AI: Human-English to AI-Lean . . . 147
3.26 Exercise 1.15 . . . 147
3.26.1 Human-English . . . 147
3.26.2 AI: Human-English to AI-Lean . . . 147
3.27 Exercise 1.16 . . . 147
3.27.1 Human-English . . . 147
3.27.2 AI: Human-English to AI-Lean . . . 148
3.28 Exercise 1.17 . . . 148
3.28.1 Human-English . . . 148
3.28.2 AI: Human-English to AI-Lean . . . 148
3.29 Exercise 1.18 . . . 148
3.29.1 Human-English . . . 148
3.29.2 AI: Human-English to AI-Lean . . . 148
3.30 Exercise 1.19 . . . 148
3.30.1 Human-English . . . 148
3.30.2 AI: Human-English to AI-Lean . . . 149
3.31 Exercise 1.20 . . . 149
3.31.1 Human-English . . . 149
3.31.2 AI: Human-English to AI-Lean . . . 149
3.32 Exercise 1.21 . . . 149
3.32.1 Human-English . . . 149
3.32.2 AI: Human-English to AI-Lean . . . 149
3.33 Exercise 1.22 . . . 150
3.33.1 Human-English . . . 150
3.33.2 AI: Human-English to AI-Lean . . . 150
3.34 Exercise 1.23 . . . 150

3.34.1 Human-English . . . 150
3.34.2 AI: Human-English to AI-Lean . . . 151
3.35 Exercise 1.24 . . . 151
3.35.1 Human-English . . . 151
3.35.2 AI: Human-English to AI-Lean . . . 151
3.36 Exercise 1.25 . . . 151
3.36.1 Human-English . . . 151
3.36.2 AI: Human-English to AI-Lean . . . 151
3.37 Exercise 1.26 . . . 151
3.37.1 Human-English . . . 151
3.37.2 AI: Human-English to AI-Lean . . . 152
3.38 Exercise 1.27 . . . 152
3.38.1 Human-English . . . 152
3.38.2 AI: Human-English to AI-Lean . . . 152
3.39 Mappings between domains . . . 152
3.40 Introduction . . . 152
3.40.1 Human-English . . . 152
3.41 LECTURE II . . . 152
3.42 Definition 2.1 . . . 153
3.42.1 Human-English . . . 153
3.42.2 AI: Human-English to AI-Lean . . . 154
3.43 Proposition 2.2 . . . 154
3.43.1 Human-English . . . 154
3.43.2 AI: Human-English to AI-Lean . . . 155
3.44 Example 2.3 . . . 155
3.44.1 Human-English . . . 155
3.44.2 AI: Human-English to AI-Lean . . . 156
3.45 Example 2.4 . . . 156
3.45.1 Human-English . . . 156
3.45.2 AI: Human-English to AI-Lean . . . 156
3.46 Theorem 2.5 . . . 156
3.46.1 Human-English . . . 156
3.46.2 AI: Human-English to AI-Lean . . . 157
3.47 Proposition 2.6 . . . 158
3.47.1 Human-English . . . 158
3.47.2 AI: Human-English to AI-Lean . . . 158
3.48 Theorem 2.7 . . . 158
3.48.1 Human-English . . . 158
3.48.2 AI: Human-English to AI-Lean . . . 159
3.49 Lecture II exercises . . . 159
3.49.1 Human-English . . . 159
3.49.2 EXERCISES . . . 159
3.50 Exercise 2.8 . . . 159
3.50.1 Human-English . . . 159
3.50.2 AI: Human-English to AI-Lean . . . 159

3.51 Exercise 2.9 . . . 159
3.51.1 Human-English . . . 159
3.51.2 AI: Human-English to AI-Lean . . . 160
3.52 Exercise 2.10 . . . 160
3.52.1 Human-English . . . 160
3.52.2 AI: Human-English to AI-Lean . . . 160
3.53 Exercise 2.11 . . . 160
3.53.1 Human-English . . . 160
3.53.2 AI: Human-English to AI-Lean . . . 161
3.54 Exercise 2.12 . . . 161
3.54.1 Human-English . . . 161
3.54.2 AI: Human-English to AI-Lean . . . 161
3.55 Exercise 2.13 . . . 161
3.55.1 Human-English . . . 161
3.55.2 AI: Human-English to AI-Lean . . . 162
3.56 Exercise 2.14 . . . 162
3.56.1 Human-English . . . 162
3.56.2 AI: Human-English to AI-Lean . . . 162
3.57 Exercise 2.15 . . . 162
3.57.1 Human-English . . . 162
3.57.2 AI: Human-English to AI-Lean . . . 162
3.58 Exercise 2.16 . . . 163
3.58.1 Human-English . . . 163
3.58.2 AI: Human-English to AI-Lean . . . 163
3.59 Exercise 2.17 . . . 163
3.59.1 Human-English . . . 163
3.59.2 AI: Human-English to AI-Lean . . . 163
3.60 Exercise 2.17 . . . 163
3.60.1 Human-English . . . 163
3.60.2 AI: Human-English to AI-Lean . . . 164
3.61 Exercise 2.18 . . . 164
3.61.1 Human-English . . . 164
3.61.2 AI: Human-English to AI-Lean . . . 164
3.62 Exercise 2.19 . . . 164
3.62.1 Human-English . . . 164
3.62.2 AI: Human-English to AI-Lean . . . 165
3.63 Exercise 2.20 . . . 165
3.63.1 Human-English . . . 165
3.63.2 AI: Human-English to AI-Lean . . . 165
3.64 Exercise 2.21 . . . 165
3.64.1 Human-English . . . 165
3.64.2 AI: Human-English to AI-Lean . . . 165
3.65 Exercise 2.22 . . . 166
3.65.1 Human-English . . . 166
3.65.2 AI: Human-English to AI-Lean . . . 166

3.66 Domain constructs . . . 166
3.67 Introduction . . . 167
3.67.1 Human-English . . . 167
3.68 Definition 3.1 . . . 167
3.68.1 Human-English . . . 167
3.68.2 AI: Human-English to AI-Lean . . . 168
3.69 Proposition 3.2 . . . 168
3.69.1 Human-English . . . 168
3.69.2 AI: Human-English to AI-Lean . . . 169
3.70 Definition 3.3 . . . 169
3.70.1 Human-English . . . 169
3.70.2 AI: Human-English to AI-Lean . . . 169
3.71 Proposition 3.4 . . . 169
3.71.1 Human-English . . . 169
3.71.2 AI: Human-English to AI-Lean . . . 170
3.72 Theorem 3.5 . . . 170
3.72.1 Human-English . . . 170
3.72.2 AI: Human-English to AI-Lean . . . 171
3.73 Lemma 3.6 . . . 171
3.73.1 Human-English . . . 171
3.73.2 AI: Human-English to AI-Lean . . . 171
3.74 Proposition 3.7 . . . 172
3.74.1 Human-English . . . 172
3.74.2 AI: Human-English to AI-Lean . . . 172
3.75 Definition 3.8 . . . 173
3.75.1 Human-English . . . 173
3.75.2 AI: Human-English to AI-Lean . . . 173
3.76 Proposition 3.9 . . . 173
3.76.1 Human-English . . . 173
3.76.2 AI: Human-English to AI-Lean . . . 175
3.77 Theorem 3.10 . . . 175
3.77.1 Human-English . . . 175
3.77.2 AI: Human-English to AI-Lean . . . 175
3.78 Theorem 3.11 . . . 175
3.78.1 Human-English . . . 175
3.78.2 AI: Human-English to AI-Lean . . . 176
3.79 Theorem 3.12 . . . 176
3.79.1 Human-English . . . 176
3.79.2 AI: Human-English to AI-Lean . . . 178
3.80 Theorem 3.13 . . . 178
3.80.1 Human-English . . . 178
3.80.2 AI: Human-English to AI-Lean . . . 178
3.81 Lecture III exercises . . . 178
3.81.1 Human-English . . . 178
3.81.2 EXERCISES . . . 178

3.82 Exercise 3.14 . . . 178
3.82.1 Human-English . . . 178
3.82.2 AI: Human-English to AI-Lean . . . 179
3.83 Exercise 3.15 . . . 179
3.83.1 Human-English . . . 179
3.83.2 AI: Human-English to AI-Lean . . . 179
3.84 Exercise 3.16 . . . 180
3.84.1 Human-English . . . 180
3.84.2 AI: Human-English to AI-Lean . . . 180
3.85 Exercise 3.17 . . . 180
3.85.1 Human-English . . . 180
3.85.2 AI: Human-English to AI-Lean . . . 181
3.86 Exercise 3.18 . . . 181
3.86.1 Human-English . . . 181
3.86.2 AI: Human-English to AI-Lean . . . 181
3.87 Exercise 3.19 . . . 181
3.87.1 Human-English . . . 181
3.87.2 AI: Human-English to AI-Lean . . . 182
3.88 Exercise 3.20 . . . 182
3.88.1 Human-English . . . 182
3.88.2 AI: Human-English to AI-Lean . . . 182
3.89 Exercise 3.21 . . . 182
3.89.1 Human-English . . . 182
3.89.2 AI: Human-English to AI-Lean . . . 182
3.90 Exercise 3.22 . . . 182
3.90.1 Human-English . . . 182
3.90.2 AI: Human-English to AI-Lean . . . 183
3.91 Exercise 3.23 . . . 183
3.91.1 Human-English . . . 183
3.91.2 AI: Human-English to AI-Lean . . . 183
3.92 Exercise 3.24 . . . 183
3.92.1 Human-English . . . 183
3.92.2 AI: Human-English to AI-Lean . . . 184
3.93 Exercise 3.25 . . . 184
3.93.1 Human-English . . . 184
3.93.2 AI: Human-English to AI-Lean . . . 184
3.94 Exercise 3.26 . . . 184
3.94.1 Human-English . . . 184
3.94.2 AI: Human-English to AI-Lean . . . 185
3.95 Exercise 3.27 . . . 185
3.95.1 Human-English . . . 185
3.95.2 AI: Human-English to AI-Lean . . . 185
3.96 Exercise 3.28 . . . 185
3.96.1 Human-English . . . 185
3.97 LECTURE IV . . . 186

3.97.1 AI: Human-English to AI-Lean . . . 186
3.98 Fixed points and recursion . . . 186
3.99 Introduction . . . 186
3.99.1 Human-English . . . 186
3.100 LECTURE IV . . . 186
3.101 Theorem 4.1 . . . 187
3.101.1 Human-English . . . 187
3.101.2 AI: Human-English to AI-Lean . . . 188
3.102 Theorem 4.2 . . . 188
3.102.1 Human-English . . . 188
3.102.2 AI: Human-English to AI-Lean . . . 189
3.103 Example 4.3 . . . 189
3.103.1 Human-English . . . 189
3.103.2 AI: Human-English to AI-Lean . . . 192
3.104 Example 4.4 . . . 192
3.104.1 Human-English . . . 192
3.104.2 AI: Human-English to AI-Lean . . . 195
3.105 Definition 4.5 . . . 195
3.105.1 Human-English . . . 195
3.105.2 AI: Human-English to AI-Lean . . . 195
3.106 Theorem 4.6 . . . 195
3.106.1 Human-English . . . 195
3.106.2 AI: Human-English to AI-Lean . . . 196
3.107 Lecture IV exercises . . . 197
3.107.1 Human-English . . . 197
3.107.2 EXERCISES . . . 197
3.108 Exercise 4.7 . . . 197
3.108.1 Human-English . . . 197
3.108.2 AI: Human-English to AI-Lean . . . 197
3.109 Exercise 4.8 . . . 197
3.109.1 Human-English . . . 197
3.109.2 AI: Human-English to AI-Lean . . . 197
3.110 Exercise 4.9 . . . 198
3.110.1 Human-English . . . 198
3.110.2 AI: Human-English to AI-Lean . . . 198
3.111 Exercise 4.10 . . . 198
3.111.1 Human-English . . . 198
3.111.2 AI: Human-English to AI-Lean . . . 198
3.112 Exercise 4.11 . . . 198
3.112.1 Human-English . . . 198
3.112.2 AI: Human-English to AI-Lean . . . 199
3.113 Exercise 4.12 . . . 199
3.113.1 Human-English . . . 199
3.113.2 AI: Human-English to AI-Lean . . . 199
3.114 Exercise 4.13 . . . 199

3.114.1 Human-English . . . 199
3.114.2 AI: Human-English to AI-Lean . . . 200
3.115 Exercise 4.14 . . . 200
3.115.1 Human-English . . . 200
3.115.2 AI: Human-English to AI-Lean . . . 200
3.116 Exercise 4.15 . . . 200
3.116.1 Human-English . . . 200
3.116.2 AI: Human-English to AI-Lean . . . 200
3.117 Exercise 4.16 . . . 200
3.117.1 Human-English . . . 200
3.117.2 AI: Human-English to AI-Lean . . . 201
3.118 Exercise 4.17 . . . 201
3.118.1 Human-English . . . 201
3.118.2 AI: Human-English to AI-Lean . . . 201
3.119 Exercise 4.18 . . . 201
3.119.1 Human-English . . . 201
3.119.2 AI: Human-English to AI-Lean . . . 201
3.120 Exercise 4.19 . . . 202
3.120.1 Human-English . . . 202
3.120.2 AI: Human-English to AI-Lean . . . 202
3.121 Exercise 4.20 . . . 202
3.121.1 Human-English . . . 202
3.121.2 AI: Human-English to AI-Lean . . . 202
3.122 Exercise 4.21 . . . 202
3.122.1 Human-English . . . 202
3.122.2 AI: Human-English to AI-Lean . . . 202
3.123 Exercise 4.22 . . . 203
3.123.1 Human-English . . . 203
3.123.2 AI: Human-English to AI-Lean . . . 203
3.124 Exercise 4.23 . . . 203
3.124.1 Human-English . . . 203
3.124.2 AI: Human-English to AI-Lean . . . 203
3.125 Exercise 4.24 . . . 203
3.125.1 Human-English . . . 203
3.125.2 AI: Human-English to AI-Lean . . . 204
3.126 Exercise 4.25 . . . 204
3.126.1 Human-English . . . 204
3.126.2 AI: Human-English to AI-Lean . . . 204
3.127 Typed λ-calculus . . . 204
3.128 Introduction . . . 204
3.128.1 Human-English . . . 204
3.129 LECTURE V . . . 204
3.130 Theorem 5.1 . . . 209
3.130.1 Human-English . . . 209
3.130.2 AI: Human-English to AI-Lean . . . 210

3.131 Theorem 5.2 . . . 211
3.131.1 Human-English . . . 211
3.131.2 AI: Human-English to AI-Lean . . . 212
3.132 Proposition 5.3 . . . 212
3.132.1 Human-English . . . 212
3.132.2 AI: Human-English to AI-Lean . . . 213
3.133 Proposition 5.4 . . . 213
3.133.1 Human-English . . . 213
3.133.2 AI: Human-English to AI-Lean . . . 214
3.134 Table 5.5 . . . 214
3.134.1 Human-English . . . 214
3.134.2 AI: Human-English to AI-Lean . . . 215
3.135 Theorem 5.6 . . . 215
3.135.1 Human-English . . . 215
3.135.2 AI: Human-English to AI-Lean . . . 218
3.136 Exercise 5.7 . . . 218
3.136.1 Human-English . . . 218
3.136.2 AI: Human-English to AI-Lean . . . 218
3.137 Exercise 5.8 . . . 218
3.137.1 Human-English . . . 218
3.137.2 AI: Human-English to AI-Lean . . . 218
3.138 Exercise 5.9 . . . 218
3.138.1 Human-English . . . 218
3.138.2 AI: Human-English to AI-Lean . . . 219
3.139 Exercise 5.10 . . . 219
3.139.1 Human-English . . . 219
3.139.2 AI: Human-English to AI-Lean . . . 219
3.140 Exercise 5.11 . . . 219
3.140.1 Human-English . . . 219
3.140.2 AI: Human-English to AI-Lean . . . 220
3.141 Exercise 5.12 . . . 220
3.141.1 Human-English . . . 220
3.141.2 AI: Human-English to AI-Lean . . . 220
3.142 Exercise 5.13 . . . 220
3.142.1 Human-English . . . 220
3.142.2 AI: Human-English to AI-Lean . . . 221
3.143 Exercise 5.13 . . . 221
3.143.1 Human-English . . . 221
3.143.2 AI: Human-English to AI-Lean . . . 221
3.144 Exercise 5.14 . . . 221
3.144.1 Human-English . . . 221
3.144.2 AI: Human-English to AI-Lean . . . 222
3.145 Exercise 5.15 . . . 222
3.145.1 Human-English . . . 222
3.145.2 AI: Human-English to AI-Lean . . . 223

3.146 Exercise 5.16 . . . 223
3.146.1 Human-English . . . 223
3.146.2 AI: Human-English to AI-Lean . . . 223
3.147 Domain equations . . . 223
3.148 Introduction . . . 225
3.148.1 Human-English . . . 225
3.149 LECTURE VI . . . 225
3.150 Example 6.1 . . . 225
3.150.1 Human-English . . . 225
3.151 Introduction . . . 254
3.151.1 Human-English . . . 254
3.152 LECTURE VII . . . 254
3.153 Definition 7.1 . . . 255
3.153.1 Human-English . . . 255
3.153.2 AI: Human-English to AI-Lean . . . 256
3.154 Definition 7.2 . . . 256
3.154.1 Human-English . . . 256
3.154.2 AI: Human-English to AI-Lean . . . 257
3.155 Proposition 7.3 . . . 257
3.155.1 Human-English . . . 257
3.155.2 AI: Human-English to AI-Lean . . . 257
3.156 Theorem 7.4 . . . 257
3.156.1 Human-English . . . 257
3.156.2 AI: Human-English to AI-Lean . . . 258
3.157 Theorem 7.5 . . . 258
3.157.1 Human-English . . . 258
3.157.2 AI: Human-English to AI-Lean . . . 260
3.158 Theorem 7.6 . . . 260
3.158.1 Human-English . . . 260
3.158.2 AI: Human-English to AI-Lean . . . 261
3.159 Proposition 7.7 . . . 261
3.159.1 Human-English . . . 261
3.159.2 AI: Human-English to AI-Lean . . . 262
3.160 Example 7.8 . . . 262
3.160.1 Human-English . . . 262
3.160.2 AI: Human-English to AI-Lean . . . 263
3.161 Definition 7.9 . . . 263
3.161.1 Human-English . . . 263
3.161.2 AI: Human-English to AI-Lean . . . 264
3.162 Proposition 7.10 . . . 264
3.162.1 Human-English . . . 264
3.162.2 AI: Human-English to AI-Lean . . . 265
3.163 Definition 7.11 . . . 265
3.163.1 Human-English . . . 265
3.163.2 AI: Human-English to AI-Lean . . . 265

3.164 Proposition 7.12 . . . 265
3.164.1 Human-English . . . 265
3.164.2 AI: Human-English to AI-Lean . . . 266
3.165 Lecture VII exercises . . . 266
3.165.1 Human-English . . . 266
3.165.2 EXERCISES . . . 266
3.166 Exercise 7.13 . . . 266
3.166.1 Human-English . . . 266
3.166.2 AI: Human-English to AI-Lean . . . 267
3.167 Exercise 7.14 . . . 267
3.167.1 Human-English . . . 267
3.167.2 AI: Human-English to AI-Lean . . . 267
3.168 Exercise 7.15 . . . 267
3.168.1 Human-English . . . 267
3.168.2 AI: Human-English to AI-Lean . . . 267
3.169 Exercise 7.16 . . . 268
3.169.1 Human-English . . . 268
3.169.2 AI: Human-English to AI-Lean . . . 268
3.170 Exercise 7.17 . . . 268
3.170.1 Human-English . . . 268
3.170.2 AI: Human-English to AI-Lean . . . 268
3.171 Exercise 7.18 . . . 268
3.171.1 Human-English . . . 268
3.171.2 AI: Human-English to AI-Lean . . . 268
3.172 Exercise 7.19 . . . 269
3.172.1 Human-English . . . 269
3.172.2 AI: Human-English to AI-Lean . . . 269
3.173 Exercise 7.20 . . . 269
3.173.1 Human-English . . . 269
3.173.2 AI: Human-English to AI-Lean . . . 269
3.174 Exercise 7.21 . . . 270
3.174.1 Human-English . . . 270
3.174.2 AI: Human-English to AI-Lean . . . 270
3.175 Exercise 7.22 . . . 270
3.175.1 Human-English . . . 270
3.175.2 AI: Human-English to AI-Lean . . . 271
3.176 Exercise 7.23 . . . 271
3.176.1 Human-English . . . 271
3.176.2 AI: Human-English to AI-Lean . . . 271
3.177 Exercise 7.24 . . . 271
3.177.1 Human-English . . . 271
3.177.2 AI: Human-English to AI-Lean . . . 272
3.178 Retracts of the universal domain . . . 272
3.179 Introduction . . . 272
3.179.1 Human-English . . . 272

3.180 LECTURE VIII . . . 272
3.181 Definition 8.1 . . . 272
3.181.1 Human-English . . . 272
3.181.2 AI: Human-English to AI-Lean . . . 272
3.182 Proposition 8.2 . . . 272
3.182.1 Human-English . . . 272
3.182.2 AI: Human-English to AI-Lean . . . 274
3.183 Definition 8.3 . . . 274
3.183.1 Human-English . . . 274
3.183.2 AI: Human-English to AI-Lean . . . 274
3.184 Examples 8.4 . . . 275
3.184.1 Human-English . . . 275
3.184.2 AI: Human-English to AI-Lean . . . 276
3.185 Theorem 8.5 . . . 276
3.185.1 Human-English . . . 276
3.185.2 AI: Human-English to AI-Lean . . . 277
3.186 Theorem 8.6 . . . 277
3.186.1 Human-English . . . 277
3.186.2 AI: Human-English to AI-Lean . . . 278
3.187 Definition 8.7 . . . 278
3.187.1 Human-English . . . 278
3.187.2 AI: Human-English to AI-Lean . . . 278
3.188 Theorem 8.8 . . . 278
3.188.1 Human-English . . . 278
3.188.2 AI: Human-English to AI-Lean . . . 280
3.189 Definition 8.9 . . . 280
3.189.1 Human-English . . . 280
3.189.2 AI: Human-English to AI-Lean . . . 281
3.190 Proposition 8.10 . . . 281
3.190.1 Human-English . . . 281
3.190.2 AI: Human-English to AI-Lean . . . 283
3.191 Lecture VIII exercises . . . 283
3.191.1 Human-English . . . 283
3.191.2 EXERCISES . . . 283
3.192 Exercise 8.11 . . . 283
3.192.1 Human-English . . . 283
3.192.2 AI: Human-English to AI-Lean . . . 283
3.193 Exercise 8.12 . . . 283
3.193.1 Human-English . . . 283
3.193.2 AI: Human-English to AI-Lean . . . 284
3.194 Exercise 8.13 . . . 284
3.194.1 Human-English . . . 284
3.194.2 AI: Human-English to AI-Lean . . . 284
3.195 Exercise 8.14 . . . 284
3.195.1 Human-English . . . 284

3.195.2 AI: Human-English to AI-Lean . . . 284
3.196 Exercise 8.15 . . . 284
3.196.1 Human-English . . . 284
3.196.2 AI: Human-English to AI-Lean . . . 285
3.197 Exercise 8.16 . . . 285
3.197.1 Human-English . . . 285
3.197.2 AI: Human-English to AI-Lean . . . 285
3.198 Exercise 8.17 . . . 285
3.198.1 Human-English . . . 285
3.198.2 AI: Human-English to AI-Lean . . . 285
3.199 Exercise 8.18 . . . 285
3.199.1 Human-English . . . 285
3.199.2 AI: Human-English to AI-Lean . . . 286
3.200 Exercise 8.19 . . . 286
3.200.1 Human-English . . . 286
3.200.2 AI: Human-English to AI-Lean . . . 286
3.201 Exercise 8.20 . . . 286
3.201.1 Human-English . . . 286
3.201.2 AI: Human-English to AI-Lean . . . 286
3.202 Exercise 8.21 . . . 286
3.202.1 Human-English . . . 286
3.202.2 AI: Human-English to AI-Lean . . . 287
3.203 Exercise 8.22 . . . 287
3.203.1 Human-English . . . 287
3.203.2 AI: Human-English to AI-Lean . . . 287
3.204 Exercise 8.23 . . . 287
3.204.1 Human-English . . . 287
3.204.2 AI: Human-English to AI-Lean . . . 287
3.205 Exercise 8.24 . . . 288
3.205.1 Human-English . . . 288
3.205.2 AI: Human-English to AI-Lean . . . 288
3.206 Exercise 8.25 . . . 288
3.206.1 Human-English . . . 288
3.206.2 AI: Human-English to AI-Lean . . . 288
3.207 Exercise 8.26 . . . 289
3.207.1 Human-English . . . 289
3.207.2 AI: Human-English to AI-Lean . . . 289
3.208 Exercise 8.27 . . . 289
3.208.1 Human-English . . . 289
3.208.2 AI: Human-English to AI-Lean . . . 290

4 Information Systems **291**
4.1 Introduction . . . 291
4.2 Information systems . . . 293
4.2.1 Human-English . . . 293
4.2.2 AI: Human-English to AI-Lean . . . 294

4.2.3 AI: AI-Lean to AI-English . . . 295
4.2.4 AI: AI-English to Human-English Concordance . . . 295
4.3 The elements of a system . . . 295
4.3.1 Human-English . . . 295
4.3.2 AI: Human-English to AI-Lean . . . 297
4.3.3 AI: AI-Lean to AI-English . . . 299
4.3.4 AI: AI-English to Human-English Concordance . . . 299
4.4 Domains as lattices and as topological spaces . . . 299
4.4.1 Human-English . . . 299
4.4.2 AI: Human-English to AI-Lean . . . 305
4.4.3 AI: AI-Lean to AI-English . . . 308
4.4.4 AI: AI-English to Human-English Concordance . . . 308
4.5 Approximable mappings between domains . . . 308
4.5.1 Human-English . . . 308
4.5.2 AI: Human-English to AI-Lean . . . 310
4.5.3 AI: AI-Lean to AI-English . . . 311
4.5.4 AI: AI-English to Human-English Concordance . . . 311
4.6 Products and sums of domains . . . 311
4.6.1 Human-English . . . 311
4.6.2 AI: Human-English to AI-Lean . . . 312
4.6.3 AI: AI-Lean to AI-English . . . 314
4.6.4 AI: AI-English to Human-English Concordance . . . 314
4.7 The function space as a domain . . . 314
4.7.1 Human-English . . . 314
4.7.2 AI: Human-English to AI-Lean . . . 316
4.7.3 AI: AI-Lean to AI-English . . . 317
4.7.4 AI: AI-English to Human-English Concordance . . . 317
4.8 Some domain equations . . . 317
4.9 Factoid 8.1 . . . 318
4.9.1 Human-English . . . 318
4.9.2 AI: Human-English to AI-Lean . . . 321
4.9.3 AI: AI-Lean to AI-English . . . 324
4.9.4 AI: AI-English to Human-English Concordance . . . 324
4.10 Factoid 8.2 . . . 324
4.10.1 Human-English . . . 324
4.10.2 AI: Human-English to AI-Lean . . . 326
4.10.3 AI: AI-Lean to AI-English . . . 335
4.10.4 AI: AI-English to Human-English Concordance . . . 335
4.11 Factoid 8.3 . . . 335
4.11.1 Human-English . . . 335
4.11.2 AI: Human-English to AI-Lean . . . 337
4.11.3 AI: AI-Lean to AI-English . . . 340
4.11.4 AI: AI-English to Human-English Concordance . . . 340
4.12 Factoid 8.4 . . . 340
4.12.1 Human-English . . . 340

4.12.2 AI: Human-English to AI-Lean . . . 341
4.12.3 AI: AI-Lean to AI-English . . . 342
4.12.4 AI: AI-English to Human-English Concordance . . . 342

5 Equivalence of Scott's Three Presentations of Domain Theory 342
5.1 Introduction . . . 343
5.2 Catalog of bridge theorems . . . 343
5.3 Proof notes . . . 346
5.3.1 Human-English . . . 346
5.3.2 AI: Human-English to AI-Lean . . . 348
5.3.3 AI: AI-Lean to AI-English . . . 356
5.3.4 AI: AI-English to Human-English Concordance . . . 356
5.4 Constructivity summary . . . 356
5.5 Worked example — S-expressions / trees . . . 356
5.5.1 Human-English . . . 357
5.5.2 AI: Human-English to AI-Lean . . . 359
5.5.3 AI: AI-Lean to AI-English . . . 361
5.5.4 AI: AI-English to Human-English Concordance . . . 361
5.6 ContinuousLatticeToNeighborhood . . . 361
5.7 InfoSysConstructions . . . 361
5.8 InfoSysToIdealCompletion . . . 361
5.9 InfoSysToNeighborhood . . . 363
5.10 NeighborhoodToInfoSys . . . 363
5.11 PresentationDomains . . . 363

6 Acknowledgments 365
6.1 AI-assisted development . . . 365
6.2 Artifact availability and reproducibility . . . 366

7 References 367

List of Figures

1 Abstract. . . . 21
2 Continuous Lattices. . . . 23
3 Data types as lattices. . . . 24
4 Continuous functions. . . . 27
5 Continuous. . . . 30
6 Graph. . . . 33
7 FixedPoint. . . . 35
8 Embedding. . . . 37
9 Historical note. . . . 39
10 Historical note. . . . 75
11 Historical note. . . . 82
12 Historical note. . . . 91
13 Historical note. . . . 95
14 Historical note. . . . 114
15 Neighbourhood systems. . . . 131
16 Domains given by neighbourhoods. . . . 134
17 Mappings between domains. . . . 153
18 Domain constructs. . . . 167
19 Fixed points and recursion. . . . 186
20 Typed λ-calculus. . . . 205
21 Domain equations. . . . 224
22 Computability in effectively given domains. . . . 273
23 Retracts of the universal domain. . . . 291
24 Information Systems. . . . 294
25 Information systems. . . . 296
26 The elements of a system. . . . 300
27 Domains as lattices and as topological spaces. . . . 309
28 Approximable mappings between domains. . . . 311
29 Products and sums of domains. . . . 315
30 The function space as a domain. . . . 317
31 Some domain equations. . . . 343
32 Equivalence of Scott's Three Presentations of Domain Theory. . . . 343
33 Introduction. . . . 345
34 Lean module map. . . . 357
35 Worked example — S-expressions / trees. . . . 362
36 ContinuousLatticeToNeighborhood. . . . 362
37 InfoSysConstructions. . . . 362
38 InfoSysToIdealCompletion. . . . 363
39 InfoSysToNeighborhood. . . . 363
40 NeighborhoodToInfoSys. . . . 364

Dependency diagram. The four papers stand on their own. The bridge theorems import continuous lattices, neighborhood systems, and information systems. Each box is one chapter. The arrowhead is on the chapter that imports. The number is how many direct imports. Datatypes as lattices and the references have no arrow.

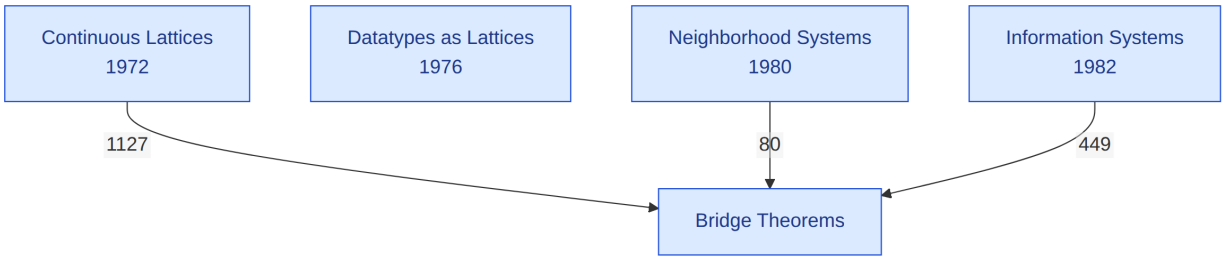


Figure 1: Abstract.

1 Continuous Lattices

Dependency diagram. Each box is one section. The arrowhead is on the section that imports. The number is how many direct imports. An arrow already implied by a longer path is left out. Section 0 has no arrow.

0. Introduction
1. Injective spaces
2. Continuous lattices
3. Function spaces
4. Inverse limits

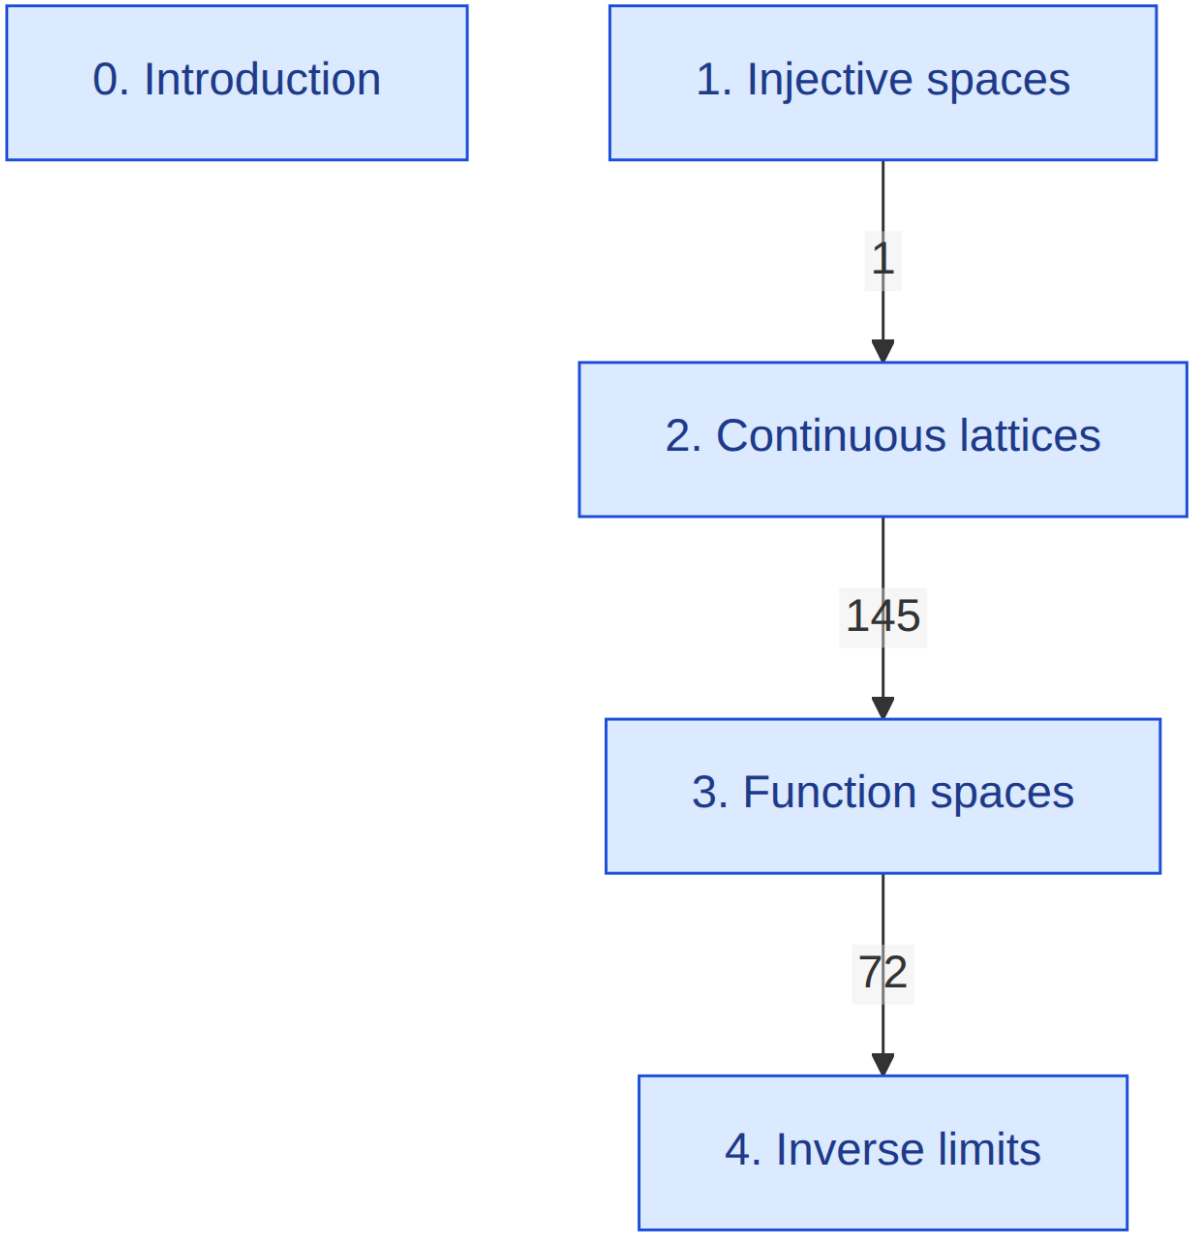


Figure 2: Continuous Lattices.

2 Data types as lattices

Dependencies. Each box is one section. The arrowhead is on the section that imports. The number is how many direct imports. An arrow already implied by a longer path is left out.

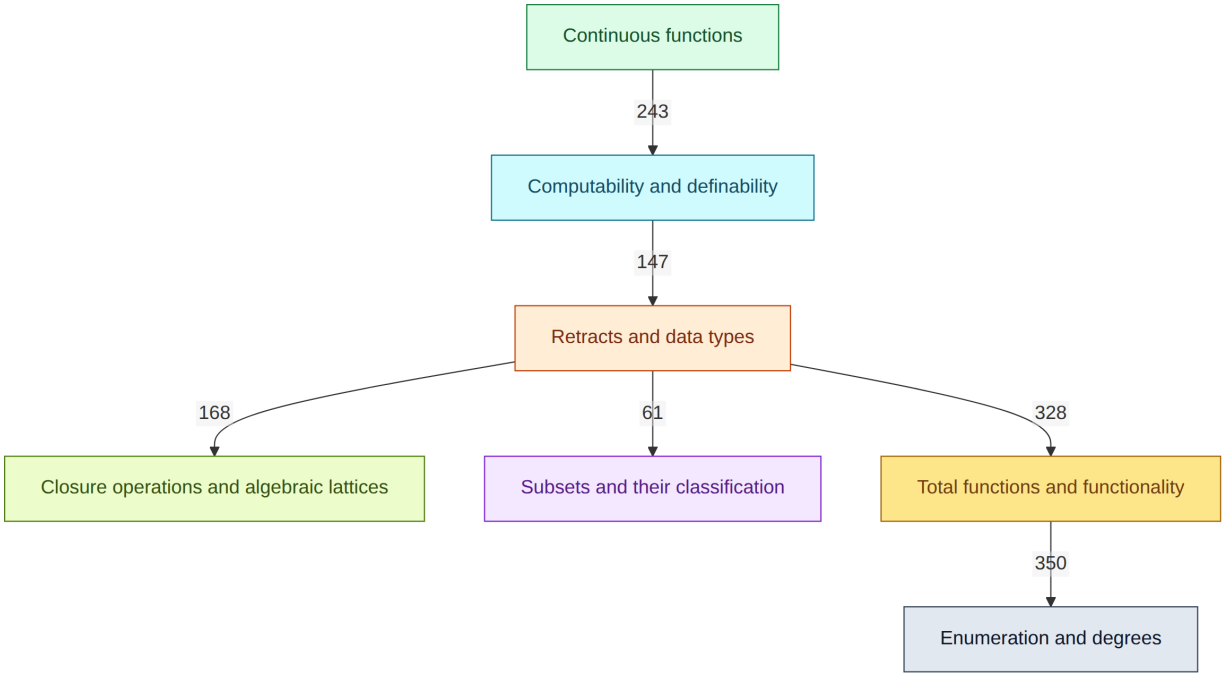


Figure 3: Data types as lattices.

2.1 Introduction

To the Memory of Christopher Strachey, 1916–1975

The meaning of many kinds of expressions in programming languages can be taken as elements of certain spaces of "partial" objects. In this report these spaces are modeled in one universal domain $\mathbf{P}\omega$, the set of all subsets of the integers. This domain renders the connection of this semantic theory with the ordinary theory of number theoretic (especially general recursive) functions clear and straightforward.

Investigations begun in 1969 with Christopher Strachey led to the idea that the denotations of many kinds of expressions in programming languages could be taken as elements of certain kinds of spaces of "partial" objects. As these spaces could be treated as function spaces, their structure at first seemed excessively complicated—even impossible. But then the author discovered that there were many more spaces than we had first imagined—even wanted. They could be presented as lattices (or as some prefer, semilattices), and the main technique was to employ topological ideas, in particular the notion of a continuous function. This approach and its applications have been presented in a number of publications, but that part of the foundation concerned with *computability* (in the sense of recursion theory) was never before adequately exposed. The purpose of the present paper is to provide such a foundation and to simplify the whole presentation by a de-emphasis of abstract ideas.

The main innovation in this report is to model everything within one "universal" domain $\mathbf{P}\omega = \{x \mid$

$x \subseteq \omega\}$, the domain of all subsets of the set ω of nonnegative integers. The advantages are many: by the most elementary considerations $\mathbf{P}\omega$ is recognized to be a lattice and a topological space. In fact, $\mathbf{P}\omega$ is a *continuous lattice*, even an *algebraic lattice*, but in the beginning we do not even need to define such an "advanced" concept; we can save these ideas for an *analysis* of what has been done here in a more direct way. Next by taking the set of integers as the basis of the construction, the connection with the ordinary theory of number-theoretic (especially, general recursive) functions can be made clear and straightforward.

The model $\mathbf{P}\omega$ can be intuitively viewed as the domain of *multiple-valued* integers; what is new in the presentation is that functions are not only multiple-valued but also "multiple-argumented". This remark is given a precise sense in § 2 below, but the upshot of the idea is that multiple-valued integers are regarded as objects in themselves—possibly infinite—and as something more than just the collection of single integers contained in them. This combination of the finite with the infinite into a single domain, together with the idea that a continuous function can be reduced to its *graph* (in the end, a set of integers), makes it possible to view an $x \in \mathbf{P}\omega$ at one time as a value, at another as an argument, then as an integer, then as a function, and still later as a functional (or combinator). The "paradox" of self-application (as in $x(x)$) is solved by allowing the *same* x to be used in two *different* ways. This is done in ordinary recursion theory via Gödel numbers (as in $\{e\}(e)$), but the advantage of the present theory is that not only is the function concept the *extensional* one, but it includes *arbitrary* continuous functions and not just the computable ones.

Section 1 introduces the elementary ideas on the topology of $\mathbf{P}\omega$ and the continuous functions including the fixed-point theorem. Section 2 has to do with computability and definability. The language LAMBDA is introduced as an extension of the pure λ-calculus by four arithmetical combinators; in fact, it is indicated in § 3 how the whole system could be based on *one* combinator. What is shown is that computability in $\mathbf{P}\omega$ according to the natural definition (which assumes that we already know what a recursively enumerable set of integers is) is equivalent to LAMBDA-definability. The main tool is, not surprisingly, the first recursion theorem formulated with the aid of the so-called *paradoxical combinator* $\mathbf{Y}$. The plan is hardly original, but the point is to work out what it all means in the model.

Along the way we have to show how to give every λ-term a denotation in $\mathbf{P}\omega$; the resulting principles of λ-calculus that are thereby verified are summarized in Table 1. Of these the first three, (α), (β), and (ξ), are indeed valid in the model; however, rule (η), which is a stronger version of extensionality, *fails* in the $\mathbf{P}\omega$ model. This should not be regarded as a disadvantage since the import of (η) is to suppose every object is a function. A quick construction of these special models is indicated at the end of § 5. Since $\mathbf{P}\omega$ is partially ordered by $\subseteq$, there are also laws involving this relation. Law (ξ^*) is an improvement of (ξ); while (μ) is a form of monotonicity for application.

TABLE 1

Some laws of λ-calculus

(α)	$\lambda x.\tau = \lambda y.\tau[y/x]$
(β)	$(\lambda x.\tau)(y) = \tau[y/x]$
(ξ)	$\lambda x.\tau = \lambda x.\sigma \quad \text{if} \quad \forall x.\, \tau = \sigma$
(η)	$y = \lambda x.y(x)$
(ξ^*)	$\lambda x.\tau \subseteq \lambda x.\sigma \quad \text{if} \quad \forall x.\, \tau \subseteq \sigma$
(μ)	$x \subseteq y$ and $u \subseteq v$ imply $u(x) \subseteq v(y)$

Section 3 has to do with enumeration and degrees. Gödel numbers for LAMBDA are defined in a very easy way which takes advantage of the notation of combinators. This leads to the second recursion theorem, and results on incompleteness and undecidability follow along standard lines. *Relative recursiveness* is

also very easy to define in the system, and we make the tie-in with *enumeration degrees* which correspond to finitely generated combinatory subalgebras of $\mathbf{P}\omega$. Finally a theorem of Myhill and Shepherdson is interpreted as a most satisfactory completeness property for definability in the system.

Sections 4 and 5 show how a calculus of *retracts* leads to quite simple definitions of a host of useful domains (as lattices). Section 6 investigates the classification of other subsets (*nonlattices*) of $\mathbf{P}\omega$; while § 7 contrasts partial (multiple-valued) functions with total functions, and interprets various theories of functionality. Connections with category theory are mentioned.

What is demonstrated in this work is how the language LAMBDA, together with its interpretation in $\mathbf{P}\omega$, is an extremely convenient vehicle for *definitions* of computable functions on complex structures (all taken as subdomains of $\mathbf{P}\omega$). It is a "high-level" programming language for recursion theory. It is *applied* combinatory logic, which in usefulness goes far beyond anything envisioned in the standard literature. What has been shown is how many interesting predicates can be *expressed* as equations between continuous functions. What is needed next is a development of the *proof theory* of the system along the lines of the work of Milner, which incorporates the author's extension of McCarthy's rule of recursion induction to this high-level language. Then we will have a flexible and practical "mathematical" theory of computation.

2.1.1 Historical note

The paper comes out of work with Christopher Strachey begun in 1969. He treated the λ-calculus as ordinary algebra. Scott's first answer was a typed theory of function spaces, later developed as LCF by Robin Milner and his collaborators. Those function spaces, which he had met in the recursion theory of Nerode and Platek, led to the inverse-limit construction of function spaces of infinite type: models of the type-free λ-calculus, written up in Scott (1971) and Scott (1973).

Plotkin (1972) had proposed a set-theoretic model. This paper is the form of that idea in which the connection with ordinary recursion theory is immediate, because the elements are sets of integers. Scott presented it at Oberwolfach at Easter 1973, and in a shorter version at the Third Scandinavian Logic Symposium (Scott (1975)). Lectures at Kiel in July 1974 covered most of the paper; the text, without the acknowledgments or the references, appeared in Springer Lecture Notes in Mathematics, volume 499. Once the definitions had settled, the model was Plotkin's, and it was already present in the enumeration operators of Myhill and Shepherdson (1955) and Friedberg and Rogers (1959).

At the end of §2 of *Continuous lattices* (Scott (1972)) he had written that representing a continuous-function space as a computable retract "does not seem to be of too much help in proving theorems." That representation is the construction of this paper. Attributions for the separate sections are recorded on those sections.

2.2 Continuous functions

The constructions below are the enumeration of finite subsets, the pairing of natural numbers, the positive topology, the graph of a continuous function, the least fixed point, and the embedding of a continuous function.

Dependency diagram. Each box is one construction. The arrowhead is on the note that imports. The number is how many direct imports. An arrow already implied by a longer path is left out.

2.3 Introduction

The domain $\mathbf{P}\omega$ of all subsets of the set ω of nonnegative integers is a complete lattice under the partial ordering $\subseteq$ of set inclusion, as is well known. We use the usual symbols $\cup$, $\cap$, $\bigcup$, $\bigcap$ for the finite and infinite

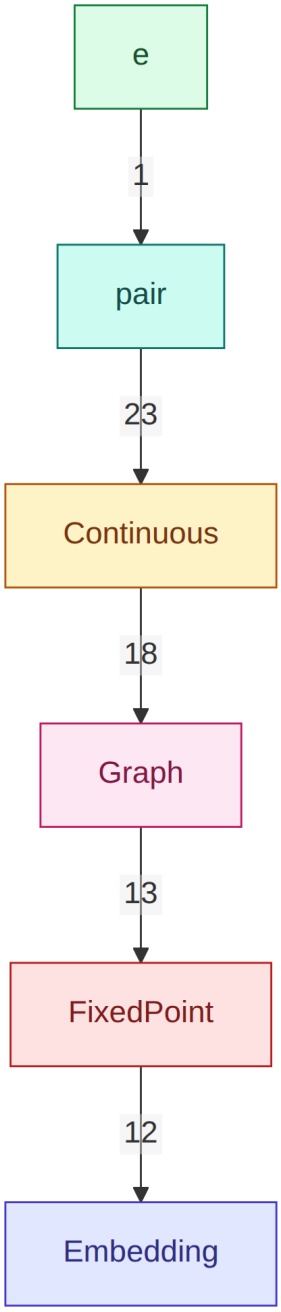


Figure 4: Continuous functions.

lattice operations of union and intersection. $\mathbf{P}\omega$ is of course also a Boolean algebra; and for complements we write

$$\sim x = \{n \mid n \notin x\}$$

where it is understood that such variables as i, j, k, l, m, n range over *integers in* ω, while u, v, w, x, y, z range over *subsets of* ω.

The domain $\mathbf{P}\omega$ can also be made into a topological space—in many ways. A common method is to match each $x \subseteq \omega$ with the corresponding characteristic function in $\{0,1\}^\omega$, and to take the induced product topology. In this way $\mathbf{P}\omega$ is a totally disconnected compact Hausdorff space homeomorphic to the Cantor "middle-third" set. This is *not* the topology we want; it is a *positive-and-negative* topology which makes the function $\sim x$ continuous. We want a weaker topology: the topology of positive "information", which has the advantage that all continuous functions possess fixed points. (The equation $x = \sim x$ is impossible.) The topology that we *do* want is exactly that appropriate to considering $\mathbf{P}\omega$ to be a continuous lattice. But all this terminology of abstract mathematics is quite unnecessary, since the required definitions can be given in very elementary terms.

To make the topology "visible", we introduce a standard enumeration $\{e_n \mid n \in \omega\}$ of all *finite* subsets of ω. Specifically we set

$$e_n = \{k_0, k_1, \cdots, k_{m-1}\},$$

provided that $k_0 < k_1 < \cdots < k_{m-1}$ and $n = \sum_{i<m} 2^{k_i}$. Thus n is the code number for e_n, and the elements of e_n are the exponents in the binary expansion of the integer n. This is a one-to-one enumeration of finite subsets, where $k \in e_n$ always implies $k < n$, the function $\max(e_n)$ is (primitive) recursive in n, and the relations $k \in e_n$, $e_n \subseteq e_m$, $e_n = e_m \cup e_k$ are all (primitive) recursive in k, m, n.

Topologically speaking the finite sets e_n are *dense* in the space $\mathbf{P}\omega$, for each $x \in \mathbf{P}\omega$ is the "limit" of its finite subsets in the sense that

$$x = \bigcup \{e_n \mid e_n \subseteq x\}.$$

To make this precise we need a rigorous definition of *open subset* of $\mathbf{P}\omega$.

2.3.1 Motivation

Give $\{\bot, \top\}$ the weak T_0-topology with open sets $\varnothing$, $\{\top\}$, and $\{\bot, \top\}$. That is the Sierpinski space, and the product $\{\bot, \top\}^\omega$ in the product topology is $\mathbf{P}\omega$. The finite sets e_n are the basic open sets of the product. Theorem 1.1 is that observation written out in elementary terms.

On a subspace $X \subseteq \mathbf{P}\omega$ a finite set e_n need not lie in X, so continuity of $f : X \to \mathbf{P}\omega$ cannot be written by applying f to e_n. Theorem 1.5 is the substitute. Such an f is continuous exactly when it is the restriction of its extension $\bar{f}$, and for $x \in X$ that reads

$$m \in f(x) \quad \text{iff} \quad \exists e_n \subseteq x \; \forall x' \in X \; [e_n \subseteq x' \text{ implies } m \in f(x')].$$

The extension $\bar{f} : \mathbf{P}\omega \to \mathbf{P}\omega$ is continuous for an arbitrary f. It extends f precisely when f is continuous.

The fixed-point formula uses the same fact in the form Scott recorded for an increasing sequence: if $x_n \subseteq x_{n+1}$ and f is continuous, then f preserves the union of the x_n. Every fixed point lies above every iterate of $\varnothing$, so the union is the least one.

2.3.2 Historical note

The positive topology came to Scott's attention through Nerode (1959). Continuous functionals had been studied by Kleene, Platek, and others, and Platek (1964) is where monotonicity is stressed. Graphs and application are used in the same way by Plotkin (1972) and by Rogers (1967, p. 147). The fixed-point theorem is Tarski's (1955). The extension theorem is Scott's, in the spirit of point-set topology, and it is the characterization of continuous lattices in Scott (1972). The embedding theorem is the standard one; Čech (1966) is a reference.

2.4 e

The powerset of the natural numbers, and the enumeration of its finite subsets by the binary code `e`. The declarations named `e_` are the facts about that code. The others are the domain, the membership tests, and the coding of finite lists and finite sets that those facts use.

2.4.1 AI: Human-English to AI-Lean

DataTypesAsLattices/Pomega/e.lean
Lean source: `DomainTheory/DataTypesAsLattices/Pomega/e.lean`

2.4.2 AI: AI-Lean to AI-English

2.5 pair

The Cantor pairing of two natural numbers into one, its inverse, and the triangular-number facts that show the pairing is injective. This imports the enumeration.

2.5.1 AI: Human-English to AI-Lean

DataTypesAsLattices/Pomega/pair.lean
Lean source: `DomainTheory/DataTypesAsLattices/Pomega/pair.lean`

2.5.2 AI: AI-Lean to AI-English

2.6 Continuous

Dependencies. Inside Continuous, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

2.6.1 AI: Human-English to AI-Lean

DataTypesAsLattices/Continuous/basicNhhd.lean
Lean source: `DomainTheory/DataTypesAsLattices/Continuous/basicNhhd.lean`
DataTypesAsLattices/Continuous/IsScottOpen.lean
Lean source: `DomainTheory/DataTypesAsLattices/Continuous/IsScottOpen.lean`
DataTypesAsLattices/Continuous/memOpen.lean
Lean source: `DomainTheory/DataTypesAsLattices/Continuous/memOpen.lean`
DataTypesAsLattices/Continuous/scottPiece.lean

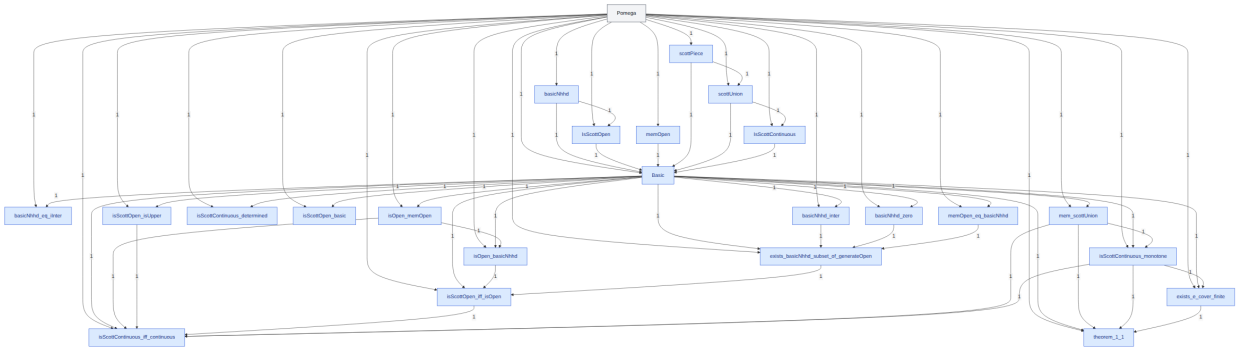


Figure 5: Continuous.

Lean source: `DomainTheory/DataTypesAsLattices/Continuous/scottPiece.lean`

DataTypesAsLattices/Continuous/scottUnion.lean

Lean source: `DomainTheory/DataTypesAsLattices/Continuous/scottUnion.lean`

DataTypesAsLattices/Continuous/IsScottContinuous.lean

Lean source: `DomainTheory/DataTypesAsLattices/Continuous/IsScottContinuous.lean`

DataTypesAsLattices/Continuous/Basic.lean

Lean source: `DomainTheory/DataTypesAsLattices/Continuous/Basic.lean`

DataTypesAsLattices/Continuous/basicNhhd_eq_iInter.lean

Lean source: `DomainTheory/DataTypesAsLattices/Continuous/basicNhhd_eq_iInter.lean`

DataTypesAsLattices/Continuous/basicNhhd_inter.lean

Lean source: `DomainTheory/DataTypesAsLattices/Continuous/basicNhhd_inter.lean`

DataTypesAsLattices/Continuous/basicNhhd_zero.lean

Lean source: `DomainTheory/DataTypesAsLattices/Continuous/basicNhhd_zero.lean`

DataTypesAsLattices/Continuous/isOpen_memOpen.lean

Lean source: `DomainTheory/DataTypesAsLattices/Continuous/isOpen_memOpen.lean`

DataTypesAsLattices/Continuous/isOpen_basicNhhd.lean

Lean source: `DomainTheory/DataTypesAsLattices/Continuous/isOpen_basicNhhd.lean`

DataTypesAsLattices/Continuous/isScottContinuous_determined.lean

Lean source: `DomainTheory/DataTypesAsLattices/Continuous/isScottContinuous_determined.lean`

DataTypesAsLattices/Continuous/isScottOpen_basic.lean

Lean source: `DomainTheory/DataTypesAsLattices/Continuous/isScottOpen_basic.lean`

DataTypesAsLattices/Continuous/isScottOpen_isUpper.lean

Lean source: `DomainTheory/DataTypesAsLattices/Continuous/isScottOpen_isUpper.lean`

DataTypesAsLattices/Continuous/memOpen_eq_basicNhhd.lean

Lean source: `DomainTheory/DataTypesAsLattices/Continuous/memOpen_eq_basicNhhd.lean`

DataTypesAsLattices/Continuous/exists_basicNhhd_subset_of_generateOpen.lean

Lean source: DomainTheory/DataTypesAsLattices/Continuous/exists_basicNhhd_subset_of_generateOpen.lean

DataTypesAsLattices/Continuous/isScottOpen_iff_isOpen.lean

Lean source: DomainTheory/DataTypesAsLattices/Continuous/isScottOpen_iff_isOpen.lean

DataTypesAsLattices/Continuous/mem_scottUnion.lean

Lean source: DomainTheory/DataTypesAsLattices/Continuous/mem_scottUnion.lean

DataTypesAsLattices/Continuous/isScottContinuous_monotone.lean

Lean source: DomainTheory/DataTypesAsLattices/Continuous/isScottContinuous_monotone.lean

DataTypesAsLattices/Continuous/exists_e_cover_finite.lean

Lean source: DomainTheory/DataTypesAsLattices/Continuous/exists_e_cover_finite.lean

DataTypesAsLattices/Continuous/isScottContinuous_iff_continuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Continuous/isScottContinuous_iff_continuous.lean

2.6.2 AI: AI-Lean to AI-English

2.7 Definition

DEFINITION. A *basis* for the neighborhoods of $\mathbf{P}\omega$ consists of those sets of the form:

$$\{x \in \mathbf{P}\omega \mid e_n \subseteq x\},$$

for a given e_n. An arbitrary *open subset* is then a union of basic neighborhoods.

It is easy to prove that an open subset $U \subseteq \mathbf{P}\omega$ is just a set of "finite character"; that is, a set such that for all $x \in \mathbf{P}\omega$ we have $x \in U$ if and only if some finite subset of x also belongs to U. An alternate approach would define directly what we mean by a continuous function using the idea that such functions must preserve limits.

2.8 Definition

DEFINITION. A function $f : \mathbf{P}\omega \to \mathbf{P}\omega$ is *continuous* iff for all $x \in \mathbf{P}\omega$ we have:

$$f(x) = \bigcup\{f(e_n) \mid e_n \subseteq x\}.$$

Again it is an easy exercise to prove that a function is continuous in the sense of this definition iff it is continuous in the usual topological sense (namely: inverse images of open sets are open). For giving proofs it is even more convenient to have the usual ε-δ formulation of continuity.

2.9 Theorem 1.1

2.9.1 Human-English

THEOREM 1.1 (The characterization theorem). A function $f : \mathbf{P}\omega \to \mathbf{P}\omega$ is *continuous* iff for all $x \in \mathbf{P}\omega$ and all e_m we have:

$$e_m \subseteq f(x) \quad \text{iff} \quad \exists e_n \subseteq x.\ e_m \subseteq f(e_n).$$

Note that open sets and continuous functions have a *monotonicity property*:
whenever $x \subseteq y$ *and* $x \in U$, *then* $y \in U$; *and*
whenever $x \subseteq y$, *then* $f(x) \subseteq f(y)$.

This gives a precise expression to the "positive" character of our topology. However, note too that openness and continuity mean rather more than just monotonicity. In particular, a continuous function is completely determined by the pairs of integers n, m such that $m \in f(e_n)$, as can be seen from the definition. (Hence, there are only a continuum number of continuous functions, but more than a continuum number of monotonic functions.) This brings us to the definition of the *graph* of a continuous function.

To formulate the definition, we introduce a standard enumeration (n, m) of all pairs of integers. Specifically we set

$$(n, m) = \tfrac{1}{2}(n + m)(n + m + 1) + m.$$

This is the enumeration along the "little diagonals" going from left to right, and it produces the ordering:

$$(0,0), (1,0), (0,1), (2,0), (1,1), (0,2), (3,0), (2,1), \ldots.$$

Note that $n \leq (n, m)$ and $m \leq (n, m)$ with equality possible only in the cases of $(0, 0)$ and $(1, 0)$. This is a one-to-one enumeration, and the inverse functions are (primitive) recursive—but we do not require at the present any notation for them.

2.9.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Continuous/theorem_1_1.lean
Lean source: `DomainTheory/DataTypesAsLattices/Continuous/theorem_1_1.lean`
DataTypesAsLattices/Continuous.lean
Lean source: `DomainTheory/DataTypesAsLattices/Continuous.lean`
DataTypesAsLattices/Graph/Basic/notation3.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/Basic/notation3.lean`

2.9.3 AI: AI-Lean to AI-English

2.9.4 AI: AI-English to Human-English Concordance

2.10 Graph

Dependencies. Inside Graph, each box is one subfolder, or one Lean file sitting directly in the folder. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

2.10.1 AI: Human-English to AI-Lean

DataTypesAsLattices/Graph/IsGraph.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/IsGraph.lean`
DataTypesAsLattices/Graph/funOf.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/funOf.lean`

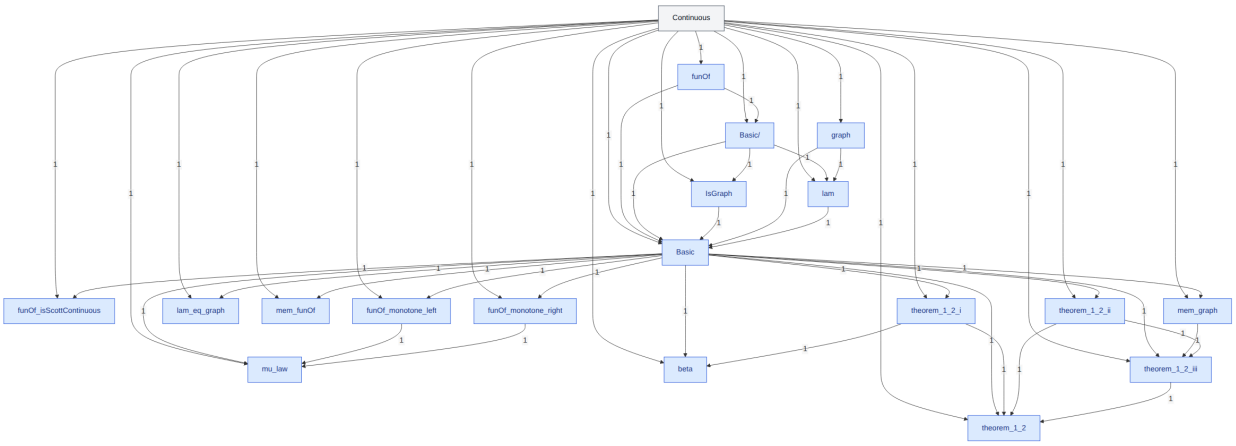


Figure 6: Graph.

DataTypesAsLattices/Graph/funOf_isScottContinuous.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/funOf_isScottContinuous.lean`
DataTypesAsLattices/Graph/funOf_monotone_left.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/funOf_monotone_left.lean`
DataTypesAsLattices/Graph/funOf_monotone_right.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/funOf_monotone_right.lean`
DataTypesAsLattices/Graph/graph.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/graph.lean`
DataTypesAsLattices/Graph/lam.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/lam.lean`
DataTypesAsLattices/Graph/lam_eq_graph.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/lam_eq_graph.lean`
DataTypesAsLattices/Graph/mem_funOf.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/mem_funOf.lean`
DataTypesAsLattices/Graph/mem_graph.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/mem_graph.lean`
DataTypesAsLattices/Graph/mu_law.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/mu_law.lean`

2.10.2 AI: AI-Lean to AI-English

2.11 Definition

DEFINITION. The graph of a continuous function $f : \mathbf{P}\omega \to \mathbf{P}\omega$ is defined by the equation:

$$\mathbf{graph}(f) = \{(n, m) \mid m \in f(e_n)\};$$

while the function determined by any set $u \subseteq \omega$ is defined by the equation:

$$\mathbf{fun}(u)(x) = \{m \mid \exists e_n \subseteq x.\ (n, m) \in u\}.$$

2.12 Theorem 1.2

2.12.1 Human-English

THEOREM 1.2 (The graph theorem). *Every continuous function is uniquely determined by its graph in the sense that:*

(i) $\mathbf{fun}(\mathbf{graph}(f)) = f$.

Conversely, every set of integers determines a continuous function and we have:

(ii) $u \subseteq \mathbf{graph}(\mathbf{fun}(u))$,

where equality holds just in case u satisfies:

(iii) *whenever $(k, m) \in u$ and $e_k \subseteq e_n$, then $(n, m) \in u$.*

Besides functions of one variable we need to consider also functions of several variables. The official definition for one variable given above can be extended simply by saying $f(x, y, \dots)$ is continuous iff it is continuous in each of $x, y, \dots$. Those familiar with the product topology can prove that for our special positive topology on $\mathbf{P}\omega$ this is equivalent to being continuous on the product space (continuous in the variables jointly). Those interested only in elementary proofs can calculate out directly from the definition (with the aid of 1.1) that continuity behaves under combinations by substitution [as in: $f(g(x, y), h(y, x, y))$].

2.12.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Graph/theorem_1_2_i.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/theorem_1_2_i.lean`
DataTypesAsLattices/Graph/beta.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/beta.lean`
DataTypesAsLattices/Graph/theorem_1_2_ii.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/theorem_1_2_ii.lean`
DataTypesAsLattices/Graph/theorem_1_2_iii.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/theorem_1_2_iii.lean`
DataTypesAsLattices/Graph/theorem_1_2.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph/theorem_1_2.lean`
DataTypesAsLattices/Graph.lean
Lean source: `DomainTheory/DataTypesAsLattices/Graph.lean`

2.12.3 AI: AI-Lean to AI-English

2.12.4 AI: AI-English to Human-English Concordance

2.13 FixedPoint

Dependencies. Inside FixedPoint, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

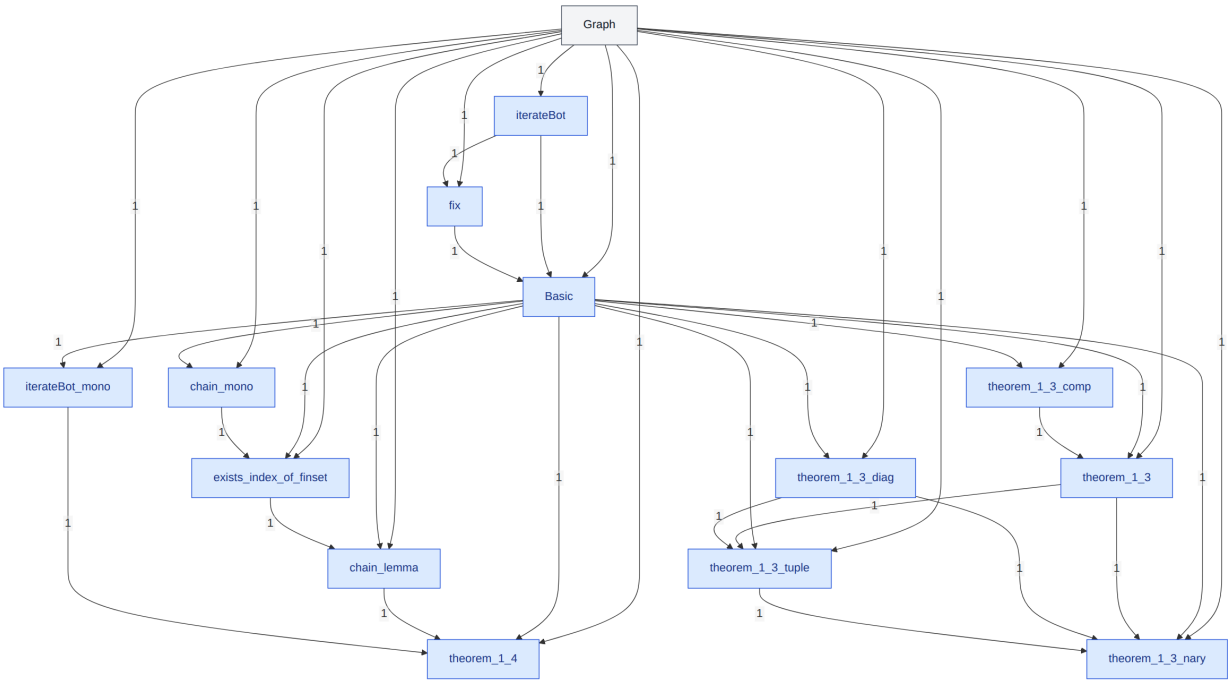


Figure 7: FixedPoint.

2.13.1 AI: Human-English to AI-Lean

DataTypesAsLattices/FixedPoint/chain_mono.lean

Lean source: `DomainTheory/DataTypesAsLattices/FixedPoint/chain_mono.lean`

DataTypesAsLattices/FixedPoint/exists_index_of_finset.lean

Lean source: `DomainTheory/DataTypesAsLattices/FixedPoint/exists_index_of_finset.lean`

DataTypesAsLattices/FixedPoint/chain_lemma.lean

Lean source: `DomainTheory/DataTypesAsLattices/FixedPoint/chain_lemma.lean`

DataTypesAsLattices/FixedPoint/iterateBot.lean

Lean source: `DomainTheory/DataTypesAsLattices/FixedPoint/iterateBot.lean`

DataTypesAsLattices/FixedPoint/fix.lean

Lean source: `DomainTheory/DataTypesAsLattices/FixedPoint/fix.lean`

DataTypesAsLattices/FixedPoint/iterateBot_mono.lean

Lean source: `DomainTheory/DataTypesAsLattices/FixedPoint/iterateBot_mono.lean`

2.13.2 AI: AI-Lean to AI-English

2.14 Theorem 1.3

2.14.1 Human-English

THEOREM 1.3 (The substitution theorem). *Continuous functions of several variables on* $\mathbf{P}\omega$ *are closed under substitution.*

2.14.2 AI: Human-English to AI-Lean

DataTypesAsLattices/FixedPoint/theorem_1_3_comp.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedPoint/theorem_1_3_comp.lean
DataTypesAsLattices/FixedPoint/theorem_1_3.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedPoint/theorem_1_3.lean
DataTypesAsLattices/FixedPoint/theorem_1_3_diag.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedPoint/theorem_1_3_diag.lean
DataTypesAsLattices/FixedPoint/theorem_1_3_tuple.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedPoint/theorem_1_3_tuple.lean
DataTypesAsLattices/FixedPoint/theorem_1_3_nary.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedPoint/theorem_1_3_nary.lean

2.14.3 AI: AI-Lean to AI-English

2.14.4 AI: AI-English to Human-English Concordance

2.15 Theorem 1.4

2.15.1 Human-English

The other general fact about continuous functions that we shall use constantly concerns fixed points, whose existence can be proved using a well-known method.

THEOREM 1.4 (The fixed-point theorem). *Every continuous function $f : \mathbf{P}\omega \to \mathbf{P}\omega$ has a least fixed point given by the formula:*

$$\mathbf{fix}(f) = \bigcup\{f^n(\varnothing) \mid n \in \omega\},$$

where $\varnothing$ is the empty set and f^n is the n-fold composition of f with itself.

Actually **fix** is a *functional* with continuity properties of its own. We shall not give the required definitions here because they can be more easily derived from the construction of the model given in the next section.

For those familiar with the abstract theory of topological spaces we give in conclusion two general facts about continuous functions with values in $\mathbf{P}\omega$ which indicate the scope and generality of our method.

2.15.2 AI: Human-English to AI-Lean

DataTypesAsLattices/FixedPoint/theorem_1_4.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedPoint/theorem_1_4.lean
DataTypesAsLattices/FixedPoint.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedPoint.lean

2.15.3 AI: AI-Lean to AI-English

2.15.4 AI: AI-English to Human-English Concordance

2.16 Embedding

Dependencies. Inside Embedding, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

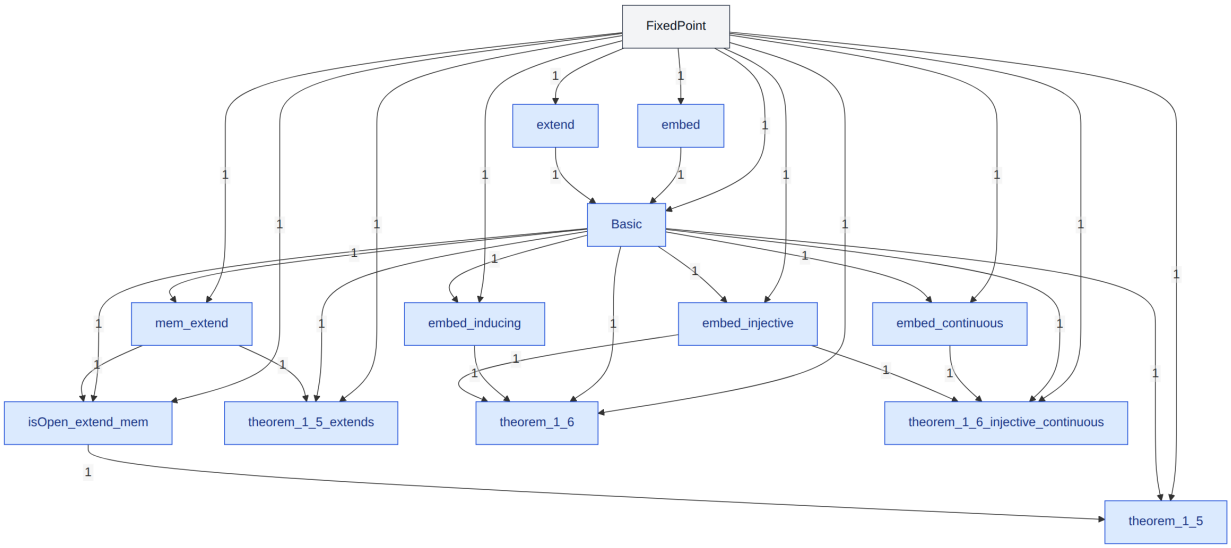


Figure 8: Embedding.

2.16.1 AI: Human-English to AI-Lean

DataTypesAsLattices/Embedding/embed.lean

Lean source: `DomainTheory/DataTypesAsLattices/Embedding/embed.lean`

DataTypesAsLattices/Embedding/embed_continuous.lean

Lean source: `DomainTheory/DataTypesAsLattices/Embedding/embed_continuous.lean`

DataTypesAsLattices/Embedding/embed_inducing.lean

Lean source: `DomainTheory/DataTypesAsLattices/Embedding/embed_inducing.lean`

DataTypesAsLattices/Embedding/embed_injective.lean

Lean source: `DomainTheory/DataTypesAsLattices/Embedding/embed_injective.lean`

DataTypesAsLattices/Embedding/extend.lean

Lean source: `DomainTheory/DataTypesAsLattices/Embedding/extend.lean`

DataTypesAsLattices/Embedding/mem_extend.lean

Lean source: `DomainTheory/DataTypesAsLattices/Embedding/mem_extend.lean`

DataTypesAsLattices/Embedding/isOpen_extend_mem.lean

Lean source: `DomainTheory/DataTypesAsLattices/Embedding/isOpen_extend_mem.lean`

2.16.2 AI: AI-Lean to AI-English

2.17 Theorem 1.5

2.17.1 Human-English

THEOREM 1.5 (The extension theorem). *Let X and Y be arbitrary topological spaces where $X \subseteq Y$ as a subspace. Then every continuous function $f : X \to \mathbf{P}\omega$ can be extended to a continuous function $\bar{f} : Y \to \mathbf{P}\omega$ defined by the equation:*

$$\bar{f}(y) = \bigcup\{\bigcap\{f(x) \mid x \in X \cap U\} \mid y \in U\},$$

where $y \in Y$, and U ranges over the open subsets of Y.

2.17.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Embedding/theorem_1_5.lean

Lean source: `DomainTheory/DataTypesAsLattices/Embedding/theorem_1_5.lean`

DataTypesAsLattices/Embedding/theorem_1_5_extends.lean

Lean source: `DomainTheory/DataTypesAsLattices/Embedding/theorem_1_5_extends.lean`

2.17.3 AI: AI-Lean to AI-English

2.17.4 AI: AI-English to Human-English Concordance

2.18 Theorem 1.6

2.18.1 Human-English

THEOREM 1.6 (The embedding theorem). *Every T_0-space X with a countable basis $\{U_n \mid n \in \omega\}$ for its topology can be embedded in $\mathbf{P}\omega$ by the continuous function $\varepsilon : X \to \mathbf{P}\omega$ defined by the equation:*

$$\varepsilon(x) = \{n \mid x \in U_n\}.$$

Technically the T_0-hypothesis is what is needed to show that ε is one-to-one. The upshot of these two theorems is that in looking for (reasonable) topological structures we can confine attention to the subspaces of $\mathbf{P}\omega$ and to continuous functions defined on *all* of $\mathbf{P}\omega$. Thus the emphasis on a single space is justified structurally. What we shall see in the remainder of this work is that the use of a single space is also justified practically because the required subspaces and functions can be *defined* in very simple ways by a natural method of equations.

2.18.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Embedding/theorem_1_6.lean

Lean source: `DomainTheory/DataTypesAsLattices/Embedding/theorem_1_6.lean`

DataTypesAsLattices/Embedding/theorem_1_6_injective_continuous.lean

Lean source: `DomainTheory/DataTypesAsLattices/Embedding/theorem_1_6_injective_continuous.lean`

DataTypesAsLattices/Embedding.lean

Lean source: `DomainTheory/DataTypesAsLattices/Embedding.lean`

2.18.3 AI: AI-Lean to AI-English

2.18.4 AI: AI-English to Human-English Concordance

2.19 Computability and definability

2.19.1 Historical note

The language LAMBDA is Scott's. Plotkin and Rogers already used graphs, application, and conversion, and the combinators they had would have defined abstraction if anyone had asked; the abstraction operation is what this section supplies. The reduction theorem and the combinator theorem are the classical ones from combinatory logic. The first recursion theorem is classical as well. The argument that Curry's combinator $\mathbf{Y}$ is the least fixed point in this model is David Park's, from an unpublished note of 1970, and it is recorded with Theorem 2.5. The equation $\mathbf{Y}(u) = u(\mathbf{Y}(u))$ is the usual calculation from (2.8). Leastness uses the pairing (n, m) and the finite sets e_l, and does not appeal to Theorem 1.4. The definition of computability and Theorem 2.6 identify the LAMBDA-definable functions with the enumeration operators.

Dependency diagram. Each box is one note that contains Lean. The arrowhead is on the note that imports. The number is how many direct imports. An arrow already implied by a longer path is left out.

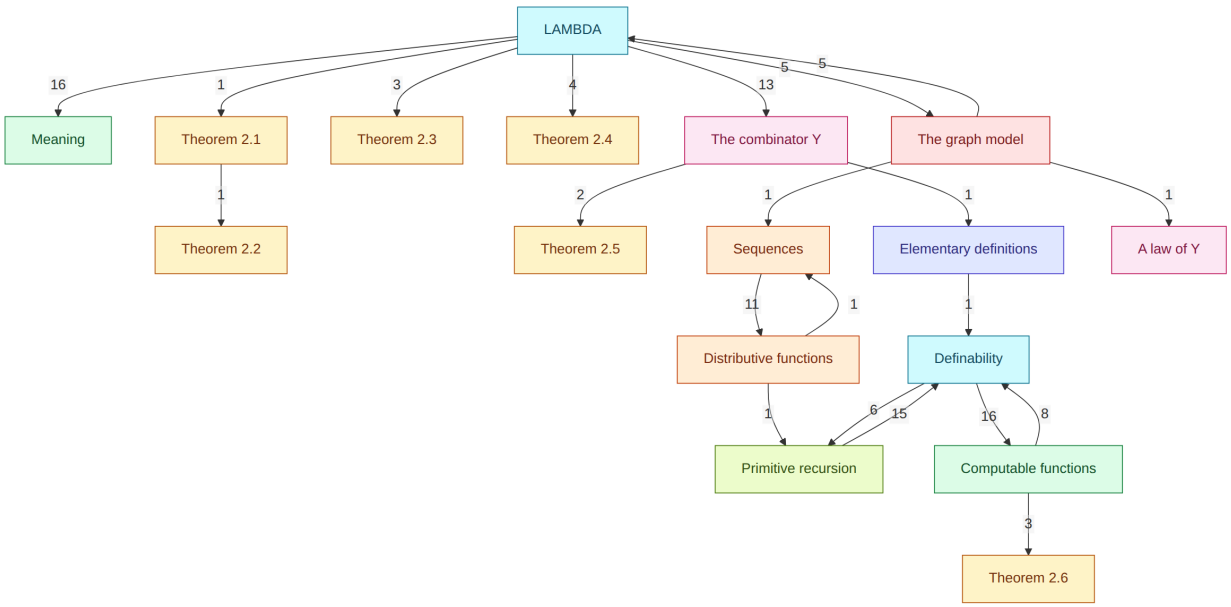


Figure 9: Historical note.

2.20 Meaning

2.20.1 Human-English

The purpose of the first section was to introduce in a simple-minded way the basic notions about the topology of $\mathbf{P}\omega$ and its continuous functions. In this section we wish to present the details of a powerful language for defining *particular* functions—especially computable functions—and initiate the study of the *use* of these functions. This study is then extended in different ways in the following sections.

Before looking at the language, a short discussion of the "meaning" of the elements $x \in \mathbf{P}\omega$ will be helpful from the point of view of motivation. Now in itself $x \in \mathbf{P}\omega$ is a set, but this does not reveal its *meaning*. Actually x has no "fixed" meaning, because it can be *used* in strikingly different ways; we look for meaning here solely in terms of use. Nevertheless it is possible to give some coherent guidelines.

In the first place it is convenient to let the singleton subsets $\{n\} \in \mathbf{P}\omega$ stand for the corresponding integers. In fact, we shall enforce by convention the equation $n = \{n\}$ as a way of simplifying notation. In this way, $\omega \subseteq \mathbf{P}\omega$ as a subset. (Note that our convention conflicts with such set-theoretical equations as $5 = \{0, 1, 2, 3, 4\}$. What we have done is to abandon the usual set-theoretical conventions in favor of a slight redefinition of *set of integers* which produces a more helpful convention for present purposes.) So, if we choose, a singleton "means" a single integer. The next question is what a "large" set $x \in \mathbf{P}\omega$ could mean. Here is an answer: if we write:

$$x = \{0, 5, 17\} = 0 \cup 5 \cup 17,$$

we are thinking of x as a *multiple integer*. This is especially useful in the case of multiple-valued function where we can write:

$$f(a) = 0 \cup 5 \cup 17.$$

Then "$m \in f(a)$" can be interpreted as "m is one value of f at a." Now $a \in \mathbf{P}\omega$, too, and so it is a multiple integer also. This brings us to an important point.

A multiple integer is (often) *more* than just the (random) collection of its elements. From the definition of continuity, $m \in f(a)$ is equivalent to $m \in f(e_n)$ with $e_n \subseteq a$. We may not be able to reduce this to $m \in f(\{n\})$ with $n \in a$ without additional assumptions on f. Indeed we shall take advantage of the feature of continuous functions whereby the elements of an argument a can join in *cooperation* in determining $f(a)$. Needless to say, continuity implies that the cooperation cannot extend beyond *finite* configurations, and so we can say that a is the union (or limit) of its finite subsets. However, finitary cooperation will be found to be quite a powerful notion.

Where does this interpretation leave the empty set $\varnothing$? When we write "$f(a) = \varnothing$" we can read this as "f has no value at a", or "f is undefined at a". In this case $f(a)$ exists (as a set), but it is not "defined" as an integer. Single- (or singleton-) valued functions are "well-defined", but multiple-valued functions are rather "over-defined".

How does this interpretation fit in with monotonicity? In case $a \subseteq b$ and $m \in f(a)$, then we must have $m \in f(b)$. We can read "$a \subseteq b$" as "b is an *improvement of* a" or "b is *better-defined than* a." The point of monotonicity is that the better we define an argument, the better we define a value. "Better" does not imply "well" (that is, singleton-valuedness), and overdefinedness may well creep in. This is not the fault of the function; it is our fault for not choosing a different function.

As a subspace $\omega \subseteq \mathbf{P}\omega$ is discrete. This implies that arbitrary functions $p : \omega \to \omega$ are continuous. Note that $p : \omega \to \mathbf{P}\omega$ as well, because $\omega \subseteq \mathbf{P}\omega$. By Theorem 1.5 we can extend p continuously to $\bar{p} : \mathbf{P}\omega \to \mathbf{P}\omega$. The formula given produces this function:

$$\bar{p}(x) = \begin{cases} \bigcap\{p(n) \mid n \in \omega\} & \text{if } x = \varnothing; \\ p(n) & \text{if } x = n \in \omega; \\ \omega & \text{otherwise.} \end{cases} \tag{2.1}$$

This is a rather abrupt extension of p (the *maximal extension*); a more gradual, continuous extension (the *minimal extension*) is determined by this equation:

$$(2.2) \quad \hat{p}(x) = \bigcup \{p(n) \mid n \in x\}.$$

The same formulae work for *all* multiple-valued functions $p : \omega \to \mathbf{P}\omega$. Functions like $f = \hat{p}$ are exactly characterized as being those continuous functions $f : \mathbf{P}\omega \to \mathbf{P}\omega$ which in addition are *distributive* in the sense of these equations:

$$f(x \cup y) = f(x) \cup f(y) \quad \text{and} \quad f(\varnothing) = \varnothing.$$

The sets $\varnothing$ and ω play special roles. When we consider them as elements of $\mathbf{P}\omega$ we shall employ the notation:

$$\bot = \varnothing \quad \text{and} \quad \top = \omega$$

The element $\bot$ is the most "undefined" integer, and $\top$ is the most "overdefined". All others are in between.

One last general point on meaning: suppose $x \in \mathbf{P}\omega$ and $k \in x$. Then $k = (n, m)$ for suitable (uniquely determined) integers n and m. That is to say, every element of x can be regarded as an ordered pair; thus, x can be used as a relation. Such an operation as

$$(2.3) \quad x; y = \{(n, l) \mid \exists m.\, (n, m) \in x,\ (m, l) \in y\}$$

is then a continuous function of two variables that treats both x and y as relations. On the other hand we could define a quite different continuous function such as

$$(2.4) \quad x + y = \{n + m \mid n \in x,\ m \in y\}$$

which treats both x and y arithmetically. The only reason we shall probably never write $(x + y); x$ again is that the values of this perfectly well-defined continuous function are, for the most part, quite uninteresting. There is, however, no theoretical reason why we cannot use the same set with several different "meanings" in the same formula. Of course if we do so, it is to be expected that we will show the point of doing this in the special case. We turn now to the definition of the general language for defining all such functions.

2.20.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Lambda/eq_2_1_empty.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/eq_2_1_empty.lean`
DataTypesAsLattices/Lambda/minExtend_bot.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/minExtend_bot.lean`
DataTypesAsLattices/Lambda/minExtend_isScottContinuous.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/minExtend_isScottContinuous.lea`
DataTypesAsLattices/Lambda/minExtend_union.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/minExtend_union.lean`
DataTypesAsLattices/Lambda/maxExtend.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/maxExtend.lean`
DataTypesAsLattices/Lambda/minExtend.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/minExtend.lean`
DataTypesAsLattices/Lambda/relComp.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/relComp.lean
DataTypesAsLattices/Lambda/setSum.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/setSum.lean

2.20.3 AI: AI-Lean to AI-English

2.21 LAMBDA

2.21.1 Human-English

The syntax and semantics of the language LAMBDA are set out in Table 2. The syntax is indicated on the left, and the meanings of the combinations are shown on the right as subsets of $\mathbf{P}\omega$. This is the basic language and could have been given (less understandably) in terms of combinators (see Theorem 2.4). It is, however, a very primitive language, and we shall require many definitions before we can see why such functions as in (2.3) and (2.4) are themselves definable.

TABLE 2
The language LAMBDA

$$0 = \{0\}$$

$$x + 1 = \{n + 1 \mid n \in x\}$$

$$x - 1 = \{n \mid n + 1 \in x\}$$

$$z \supset x, y = \{n \in x \mid 0 \in z\} \cup \{m \in y \mid \exists k.\, k + 1 \in z\}$$

$$u(x) = \{m \mid \exists e_n \subseteq x.\, (n, m) \in u\}$$

$$\lambda x.\, \tau = \{(n, m) \mid m \in \tau[e_n/x]\}$$

The definition has been left somewhat informal in hopes that it will be more understandable. In the above, τ is any term of the language. LAMBDA is type-free and allows any combination to be made by substitution into the given functions. There is one primitive constant (0); there are two unary functions $(x + 1,\ x - 1)$; there is one binary function $(u(x))$ and one ternary function $(z \supset x, y)$; finally there is one variable binding operator $(\lambda x.\, \tau)$. The first three equations have obvious sense. In the fourth, $z \supset x, y$ is McCarthy's conditional expression (a test for zero). Next $u(x)$ defines *application* (u is treated as a graph and x as a set), and $\lambda x.\, \tau$ is *functional abstraction* (compare the definition of **fun**). In defining $\lambda x.\, \tau$, we use $\tau[e_n/x]$ as a shorthand for evaluating the term τ when the variable x is given the value e_n.

Note that the functions are all multiple-valued. Thus we have such a result as:

$$(2.5) \quad (6 \cup 10) + 1 = 7 \cup 11.$$

The partial character of subtraction has expression as:

$$(2.6) \quad 0 - 1 = \bot.$$

We shall see how to define $+$ and $-$ in LAMBDA later. The conditional could also have been defined by cases:

$$z \supset x, y = \begin{cases} \bot & \text{if } z = \bot; \\ x & \text{if } z = 0; \\ y & \text{if } 0 \notin z \neq \bot; \\ x \cup y & \text{if } 0 \in z \neq 0. \end{cases} \tag{2.7}$$

We say that a LAMBDA-term τ defines a function of its free variables (at least).

2.21.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Computability/combinatory_isLambdaDefinable.lean
Lean source: `DomainTheory/DataTypesAsLattices/Computability/combinatory_isLambdaDefinable.lean`
DataTypesAsLattices/Lambda/Comb.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/Comb.lean`
DataTypesAsLattices/Lambda/Kcomb.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/Kcomb.lean`
DataTypesAsLattices/Lambda/Scomb.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/Scomb.lean`
DataTypesAsLattices/Lambda/Term.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/Term.lean`
DataTypesAsLattices/Lambda/condSet.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/condSet.lean`
DataTypesAsLattices/Lambda/condC.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/condC.lean`
DataTypesAsLattices/Lambda/condSet_isScottContinuous_mid.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/condSet_isScottContinuous_mid.lean`
DataTypesAsLattices/Lambda/condSet_isScottContinuous_right.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/condSet_isScottContinuous_right.lean`
DataTypesAsLattices/Lambda/const_isScottContinuous.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/const_isScottContinuous.lean`
DataTypesAsLattices/Lambda/dcondSet_bot.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/dcondSet_bot.lean`
DataTypesAsLattices/Lambda/dcondSet_cases.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/dcondSet_cases.lean`
DataTypesAsLattices/Lambda/dcondSet_isScottContinuous_mid.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/dcondSet_isScottContinuous_mid.lean`
DataTypesAsLattices/Lambda/dcondSet_isScottContinuous_right.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/dcondSet_isScottContinuous_right.lean`
DataTypesAsLattices/Lambda/dcondSet_ofNat_one.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dcondSet_ofNat_one.lean

DataTypesAsLattices/Lambda/dcondSet_ofNat_zero.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dcondSet_ofNat_zero.lean

DataTypesAsLattices/Lambda/dcondSet_of_empty.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dcondSet_of_empty.lean

DataTypesAsLattices/Lambda/dcondSet_of_mixed.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dcondSet_of_mixed.lean

DataTypesAsLattices/Lambda/dcondSet_of_pos_not_zero.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dcondSet_of_pos_not_zero.lean

DataTypesAsLattices/Lambda/dcondSet_ofNat_succ.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dcondSet_ofNat_succ.lean

DataTypesAsLattices/Lambda/dcondSet_of_zero_not_pos.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dcondSet_of_zero_not_pos.lean

DataTypesAsLattices/Lambda/dcondSet_top.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dcondSet_top.lean

DataTypesAsLattices/Lambda/e_one.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/e_one.lean

DataTypesAsLattices/Lambda/condSet_isScottContinuous_left.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/condSet_isScottContinuous_left.lean

DataTypesAsLattices/Lambda/envSet_comm.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/envSet_comm.lean

DataTypesAsLattices/Lambda/eq_2_1_else.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_1_else.lean

DataTypesAsLattices/Lambda/eq_2_1_singleton.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_1_singleton.lean

DataTypesAsLattices/Lambda/eq_2_5.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_5.lean

DataTypesAsLattices/Lambda/eq_2_6.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_6.lean

DataTypesAsLattices/Lambda/eq_2_7_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_7_bot.lean

DataTypesAsLattices/Lambda/eq_2_7_mix.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_7_mix.lean

DataTypesAsLattices/Lambda/eq_2_7_pos.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_7_pos.lean

DataTypesAsLattices/Lambda/eq_2_7_succ.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_7_succ.lean

DataTypesAsLattices/Lambda/eq_2_7_zero.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_7_zero.lean

DataTypesAsLattices/Lambda/exists_least_mem.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/exists_least_mem.lean
DataTypesAsLattices/Lambda/exists_least_not_mem.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/exists_least_not_mem.lean
DataTypesAsLattices/Lambda/Scomb_inner_cont.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/Scomb_inner_cont.lean
DataTypesAsLattices/Lambda/graph_const_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/graph_const_isScottContinuous.l
DataTypesAsLattices/Lambda/Scomb_map_cont.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/Scomb_map_cont.lean
DataTypesAsLattices/Lambda/Scomb_beta.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/Scomb_beta.lean
DataTypesAsLattices/Lambda/Scomb_mid_cont.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/Scomb_mid_cont.lean
DataTypesAsLattices/Lambda/Scomb_beta2.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/Scomb_beta2.lean
DataTypesAsLattices/Lambda/Scomb_beta3.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/Scomb_beta3.lean
DataTypesAsLattices/Lambda/condC_map_cont.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/condC_map_cont.lean
DataTypesAsLattices/Lambda/condC_beta.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/condC_beta.lean
DataTypesAsLattices/Lambda/condC_beta2.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/condC_beta2.lean
DataTypesAsLattices/Lambda/condC_beta3.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/condC_beta3.lean
DataTypesAsLattices/Lambda/curry2_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/curry2_app.lean
DataTypesAsLattices/Lambda/curry3_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/curry3_app.lean
DataTypesAsLattices/Lambda/curryFin_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/curryFin_isScottContinuous.lean
DataTypesAsLattices/Lambda/curryFin_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/curryFin_app.lean
DataTypesAsLattices/Lambda/id_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/id_isScottContinuous.lean
DataTypesAsLattices/Lambda/Kcomb_beta.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/Kcomb_beta.lean
DataTypesAsLattices/Lambda/Kcomb_beta2.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/Kcomb_beta2.lean
DataTypesAsLattices/Lambda/SKK_eq_I.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/SKK_eq_I.lean
DataTypesAsLattices/Lambda/dcondSet_isScottContinuous_left.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dcondSet_isScottContinuous_left.lean

DataTypesAsLattices/Lambda/ofComb_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/ofComb_combinatory.lean
DataTypesAsLattices/Lambda/ofComb_update_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/ofComb_update_isScottContinuous
DataTypesAsLattices/Lambda/abs_correct.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/abs_correct.lean
DataTypesAsLattices/Lambda/ofNat.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/ofNat.lean
DataTypesAsLattices/Lambda/pair_one_zero.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/pair_one_zero.lean
DataTypesAsLattices/Lambda/pair_zero_zero.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/pair_zero_zero.lean
DataTypesAsLattices/Lambda/predSet.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/predSet.lean
DataTypesAsLattices/Lambda/predC.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/predC.lean
DataTypesAsLattices/Lambda/predSet_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/predSet_isScottContinuous.lean
DataTypesAsLattices/Lambda/predC_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/predC_app.lean
DataTypesAsLattices/Lambda/predSet_ofNat_succ.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/predSet_ofNat_succ.lean
DataTypesAsLattices/Lambda/succSet.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/succSet.lean
DataTypesAsLattices/Lambda/sucC.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/sucC.lean
DataTypesAsLattices/Lambda/succSet_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/succSet_isScottContinuous.lean
DataTypesAsLattices/Lambda/interp_var_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/interp_var_isScottContinuous.le
DataTypesAsLattices/Lambda/sucC_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/sucC_app.lean
DataTypesAsLattices/Lambda/erase_correct.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/erase_correct.lean
DataTypesAsLattices/Lambda/succSet_ofNat.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/succSet_ofNat.lean
DataTypesAsLattices/Lambda/ofNat_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/ofNat_combinatory.lean
DataTypesAsLattices/Lambda/termShift_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/termShift_isScottContinuous.lea
DataTypesAsLattices/Lambda/termShift_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/termShift_app.lean
DataTypesAsLattices/Lambda/termShift_left_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/termShift_left_isScottContinuous.lean

DataTypesAsLattices/Lambda/termShift_ofNat.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/termShift_ofNat.lean

DataTypesAsLattices/Lambda/triangle_eq_zero.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/triangle_eq_zero.lean

DataTypesAsLattices/Lambda/pair_eq_right.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/pair_eq_right.lean

DataTypesAsLattices/Lambda/zeroC.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/zeroC.lean

DataTypesAsLattices/Lambda/IsCombinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/IsCombinatory.lean

DataTypesAsLattices/Lambda/mem_ofNat.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/mem_ofNat.lean

DataTypesAsLattices/Lambda/Fofg.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/Fofg.lean

DataTypesAsLattices/Lambda/ScottContinuousFin.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/ScottContinuousFin.lean

DataTypesAsLattices/Lambda/Occurs.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/Occurs.lean

DataTypesAsLattices/Lambda/abs.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/abs.lean

DataTypesAsLattices/Lambda/curry2.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/curry2.lean

DataTypesAsLattices/Lambda/curry3.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/curry3.lean

DataTypesAsLattices/Lambda/curryFin.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/curryFin.lean

DataTypesAsLattices/Lambda/dcondSet.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/dcondSet.lean

DataTypesAsLattices/Lambda/envSet.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/envSet.lean

DataTypesAsLattices/Lambda/erase.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/erase.lean

DataTypesAsLattices/Lambda/interp.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/interp.lean

DataTypesAsLattices/Lambda/nestApplyFin.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/nestApplyFin.lean

DataTypesAsLattices/Lambda/ofComb.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/ofComb.lean

DataTypesAsLattices/Lambda/rename.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/rename.lean

DataTypesAsLattices/Lambda/termShift.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/termShift.lean

2.21.3 AI: AI-Lean to AI-English

2.22 Theorem 2.1

2.22.1 Human-English

THEOREM 2.1 (The continuity theorem). *All LAMBDA definable functions are continuous.*

2.22.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Lambda/theorem_2_1.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/theorem_2_1.lean`

2.22.3 AI: AI-Lean to AI-English

2.22.4 AI: AI-English to Human-English Concordance

2.23 Theorem 2.2

2.23.1 Human-English

Once that is proved, we can use Theorem 1.2 to establish:

THEOREM 2.2 (The conversion theorem). *The three basic principles* (α), (β), (ξ) *of* λ*-conversion are all valid in the model.*

2.23.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Lambda/theorem_2_2_alpha.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/theorem_2_2_alpha.lean`
DataTypesAsLattices/Lambda/theorem_2_2_beta.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/theorem_2_2_beta.lean`
DataTypesAsLattices/Lambda/primRecStepTerm_interp.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/primRecStepTerm_interp.lean`
DataTypesAsLattices/Lambda/primRecStep_graph_of.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/primRecStep_graph_of.lean`
DataTypesAsLattices/Lambda/theorem_2_2_xi.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/theorem_2_2_xi.lean`
DataTypesAsLattices/Lambda/theorem_2_2.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/theorem_2_2.lean`

2.23.3 AI: AI-Lean to AI-English

2.23.4 AI: AI-English to Human-English Concordance

2.24 Theorem 2.3

2.24.1 Human-English

By "model" here we of course understand the interpretation of the language where the semantics gives terms denotations in $\mathbf{P}\omega$ according to the stated definition. Through this interpretation, more properly speaking, $\mathbf{P}\omega$ becomes a model for the axioms (α), (β), (ξ). Two well-known results of the calculus of λ-conversion allow the reduction of functions of several variables to those of *one*, and the reduction of all the primitives to *combinators* (constants)—all this with the aid of the binary operation of application.

THEOREM 2.3 (The reduction theorem). *Any continuous function of k-variables can be written as*

$$f(x_0, x_1, \cdots, x_{k-1}) = u(x_0)(x_1)\cdots(x_{k-1}),$$

where u is a suitably chosen element of $\mathbf{P}\omega$.

2.24.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Lambda/theorem_2_3.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/theorem_2_3.lean`
DataTypesAsLattices/Lambda/theorem_2_3_binary.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/theorem_2_3_binary.lean`
DataTypesAsLattices/Lambda/theorem_2_3_ternary.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/theorem_2_3_ternary.lean`
DataTypesAsLattices/Lambda/theorem_2_3_unary.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/theorem_2_3_unary.lean`

2.24.3 AI: AI-Lean to AI-English

2.24.4 AI: AI-English to Human-English Concordance

2.25 Theorem 2.4

2.25.1 Human-English

THEOREM 2.4 (The combinator theorem). *The LAMBDA-definable functions* can be generated (*from variables*) by iterated application with the aid of these six constants:

$$\mathbf{0} = 0$$

$$\mathbf{suc} = \lambda x.\, x + 1$$

$$\mathbf{pred} = \lambda x.\, x - 1$$

$$\mathbf{cond} = \lambda x \lambda y \lambda z.\, z \supset x, y$$

$$\mathbf{K} = \lambda x \lambda y.\, x$$

$$\mathbf{S} = \lambda u \lambda v \lambda x.\, u(x)(v(x))$$

But the result that makes all this model building and combinatory logic mathematically interesting concerns the so-called *paradoxical combinator* defined by the equation:

$$(2.8) \quad \mathbf{Y} = \lambda u.\, (\lambda x.\, u(x(x)))(\lambda x.\, u(x(x))).$$

2.25.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Lambda/theorem_2_4.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/theorem_2_4.lean`
DataTypesAsLattices/Lambda/theorem_2_4_complete.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/theorem_2_4_complete.lean`
DataTypesAsLattices/Lambda/theorem_2_4_closed.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/theorem_2_4_closed.lean`
DataTypesAsLattices/Lambda/Ycomb_combinatory.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/Ycomb_combinatory.lean`

2.25.3 AI: AI-Lean to AI-English

2.25.4 AI: AI-English to Human-English Concordance

2.26 The combinator Y

2.26.1 Human-English

But the result that makes all this model building and combinatory logic mathematically interesting concerns the so-called *paradoxical combinator* defined by the equation:

$$(2.8) \quad \mathbf{Y} = \lambda u.\, (\lambda x.\, u(x(x)))(\lambda x.\, u(x(x))).$$

2.26.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Lambda/Yterm_interp.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/Yterm_interp.lean`
DataTypesAsLattices/Lambda/diagApp_isScottContinuous.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/diagApp_isScottContinuous.lean`
DataTypesAsLattices/Lambda/omegaComb_app.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/omegaComb_app.lean`
DataTypesAsLattices/Lambda/omegaComb_isScottContinuous.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/omegaComb_isScottContinuous.lea`
DataTypesAsLattices/Lambda/Ycomb_app.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/Ycomb_app.lean`
DataTypesAsLattices/Lambda/Ycomb_unfold.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/Ycomb_unfold.lean`

DataTypesAsLattices/Lambda/omega_first_recursion.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/omega_first_recursion.lean`
DataTypesAsLattices/Lambda/Yterm.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/Yterm.lean`
DataTypesAsLattices/Lambda/omegaComb.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/omegaComb.lean`
DataTypesAsLattices/Lambda/Ycomb.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/Ycomb.lean`

2.26.3 AI: AI-Lean to AI-English

2.27 Theorem 2.5

2.27.1 Human-English

THEOREM 2.5 (The first recursion theorem). *If u is the graph of a continuous function f, then $\mathbf{Y}(u) = \mathbf{fix}(f)$, the least fixed point of f.*

There are two points to note here: the fixed point is LAMBDA-definable if f is; and $\mathbf{Y}$ defines a continuous operator. The word "recursion" is attached to the theorem because fixed points are employed to solve recursion equations. It would not be correct to call the fixed-point theorem (Theorem 1.4) the recursion theorem since it only shows that fixed points exist and not how they are definable in a language. The *second* recursion theorem (in Kleene's terminology) is related, but it involves Gödel numbers as introduced in § 3.

From this point on we see no need to distinguish continuous functions from elements of $\mathbf{P}\omega$; a continuous function will be *identified* with its graph. Note that u is a graph iff $u = \lambda x.\, u(x)$, which is equivalent to Theorem 1.2 (iii). For this reason (functions are graphs) we propose the name *Graph Model* for this model of the λ-calculus. (There is more to LAMBDA than just λ, however.)

The identification of functions with graphs entails that the function space of all continuous functions from $\mathbf{P}\omega$ into $\mathbf{P}\omega$ is to be identified (one-to-one) with the subspace

$$\mathbf{FUN} = \{u \mid u = \lambda x.\, u(x)\} \subseteq \mathbf{P}\omega.$$

The identification is *topological* in that the subspace topology agree with the product topology on the function space. This is the topology of pointwise convergence and is closely connected with the lattice structure on the function space which is also defined pointwise (that is, argumentwise). In the notation of λ-abstraction we can express this as the extension of the axiom of extensionality called (ξ^*) in Table 1 of the Introduction. The laws in Table 1 are not the only ones valid in the model, however. We may also note such argumentwise distribution laws as:

$$(2.9) \quad (f \cup g)(x) = f(x) \cup g(x);$$

$$(2.10) \quad (\lambda x.\, \tau) \cup (\lambda x.\, \sigma) = \lambda x.\, (\tau \cup \sigma);$$

$$(2.11) \quad (f \cap g)(x) = f(x) \cap g(x);$$

$$(2.12) \quad (\lambda x.\, \tau) \cap (\lambda x.\, \sigma) = \lambda x.\, (\tau \cap \sigma).$$

In the above f and g must be graphs. It is also true that if $\mathcal{F} \subseteq \mathbf{P}\omega$, then

$$(2.13) \quad \bigcup\{f \mid f \in \mathcal{F}\}(x) = \bigcup\{f(x) \mid f \in \mathcal{F}\},$$

but the same does not hold for $\cap$.

We state now a sequence of minor results which show why some simple functions and constants are LAMBDA-definable.

$$(2.14) \quad \bot = (\lambda x.\, x(x))(\lambda x.\, x(x));$$

$$(2.15) \quad x \cup y = (\lambda z.\, 0) \supset x, y; \quad \text{(Hint: } 0, 1 \in \lambda z.\, 0)$$

$$(2.16) \quad \top = \mathbf{Y}(\lambda x.\, 0 \cup (x+1));$$

$$(2.17) \quad x \cap y = \mathbf{Y}(\lambda f \lambda x \lambda y.\, x \supset (y \supset 0, \bot), f(x-1)(y-1)+1)(x)(y).$$

The elements $\bot$ and $\top$ are graphs, by the way, and we can characterize them as the only fixed points of the combinator $\mathbf{K}$:

$$(2.18) \quad a = \lambda x.\, a \quad \text{iff} \quad a = \bot \quad \text{or} \quad a = \top.$$

Next we use the notation $\langle x_0, x_1, \ldots, x_{n-1}\rangle$ for the function $\hat{p}$ where $p : \omega \to \mathbf{P}\omega$ is defined by:

$$p(i) = \begin{cases} x_i & \text{if } i < n; \\ \bot & \text{if } i \geq n. \end{cases}$$

$$(2.19) \quad \langle\rangle = \bot$$

$$(2.20) \quad \langle x\rangle = \lambda z.\, z \supset x, \bot$$

$$(2.21) \quad \langle x, y\rangle = \lambda z.\, z \supset x, (z-1 \supset y, \bot)$$

$$(2.22) \quad \langle x_0, x_1, \ldots, x_n\rangle = \lambda z.\, z \supset x_0, \langle x_1, \ldots, x_n\rangle(z-1).$$

Obviously we should formalize the subscript notation so that $u_x = u(x)$; then we find:

$$(2.23) \quad \langle x_0, x_1, \ldots, x_n\rangle_i = \begin{cases} x_i & \text{if } i < n; \\ \bot & \text{if } i \geq n. \end{cases}$$

This gives us the method of LAMBDA-defining *finite sequences* (in a quite natural way), and the next step is to consider *infinite sequences*. But these are just the functions $\hat{p}$ where $p : \omega \to \mathbf{P}\omega$ is arbitrary. What we need then is a condition expressible in the language equivalent to saying $u = \hat{p}$ for some p. This is the same as

$$u = \lambda x.\, \bigcup\{u_i \mid i \in x\}.$$

but the $\cup$- and set-notation is not part of LAMBDA. We are forced into a recursive definition:

$$(2.24) \quad \$ = \mathbf{Y}(\lambda s \lambda u \lambda z.\, z \supset u_0,\, s(\lambda t.\, u_{t+1})(z-1)).$$

This equation generalizes (2.22) and we have:

$$(2.25) \quad \$(u) = \lambda x.\, \bigcup \{u_i \mid i \in x\}.$$

Thus the combinator \$ "revalues" an element as a distributive function. This suggests introducing the λ-notation for such functions by the equation:

$$(2.26) \quad \lambda n \in \omega.\, \tau = \$(\lambda z.\, \tau[z/n]).$$

With all these conventions LAMBDA-notation becomes very much like ordinary mathematical notation without too much strain.

Suppose that f is any continuous function and $a \in \mathbf{P}\omega$. We can define $p : \omega \to \mathbf{P}\omega$ in the ordinary way by primitive recursion where:

$$p(0) = a;$$

$$p(n+1) = f(n)(p(n)).$$

The question is: can we give a LAMBDA-definition for $\hat{p}$ (in terms of f and a as constants, say)? The answer is clear, for we can prove:

$$(2.27) \quad \hat{p} = \mathbf{Y}(\lambda u \lambda n \in \omega.\, n \supset a,\, f(n-1)(u(n-1))).$$

This already shows that a large part of the definitions of recursion theory can be given in this special language. Of course, simultaneous (primitive) recursions can be transcribed into LAMBDA with the aid of the ordered tuples of (2.22), (2.23) above. But we can go further and connect with partial (and general) recursive functions. We state first a definition.

2.27.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Lambda/theorem_2_5.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/theorem_2_5.lean`
DataTypesAsLattices/Lambda/dollarC_combinatory.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/dollarC_combinatory.lean`
DataTypesAsLattices/Lambda/eq_2_24_Ycomb.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/eq_2_24_Ycomb.lean`
DataTypesAsLattices/Lambda.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda.lean`

2.27.3 AI: AI-Lean to AI-English

2.27.4 AI: AI-English to Human-English Concordance

2.28 The graph model

2.28.1 Human-English

From this point on we see no need to distinguish continuous functions from elements of $\mathbf{P}\omega$; a continuous function will be *identified* with its graph. Note that u is a graph iff $u = \lambda x.\, u(x)$, which is equivalent to Theorem 1.2 (iii). For this reason (functions are graphs) we propose the name *Graph Model* for this model of the λ-calculus. (There is more to LAMBDA than just λ, however.)

The identification of functions with graphs entails that the function space of all continuous functions from $\mathbf{P}\omega$ into $\mathbf{P}\omega$ is to be identified (one-to-one) with the subspace

$$\mathbf{FUN} = \{u \mid u = \lambda x.\, u(x)\} \subseteq \mathbf{P}\omega.$$

The identification is *topological* in that the subspace topology agree with the product topology on the function space. This is the topology of pointwise convergence and is closely connected with the lattice structure on the function space which is also defined pointwise (that is, argumentwise). In the notation of λ-abstraction we can express this as the extension of the axiom of extensionality called (ξ^*) in Table 1 of the Introduction. The laws in Table 1 are not the only ones valid in the model, however. We may also note such argumentwise distribution laws as:

$$(2.9) \quad (f \cup g)(x) = f(x) \cup g(x);$$

$$(2.10) \quad (\lambda x.\, \tau) \cup (\lambda x.\, \sigma) = \lambda x.\, (\tau \cup \sigma);$$

$$(2.11) \quad (f \cap g)(x) = f(x) \cap g(x);$$

$$(2.12) \quad (\lambda x.\, \tau) \cap (\lambda x.\, \sigma) = \lambda x.\, (\tau \cap \sigma).$$

In the above f and g must be graphs. It is also true that if $\mathcal{F} \subseteq \mathbf{P}\omega$, then

$$(2.13) \quad \bigcup\{f \mid f \in \mathcal{F}\}(x) = \bigcup\{f(x) \mid f \in \mathcal{F}\},$$

but the same does not hold for $\cap$.

2.28.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Lambda/eq_2_10.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/eq_2_10.lean`
DataTypesAsLattices/Lambda/eq_2_11.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/eq_2_11.lean`
DataTypesAsLattices/Lambda/eq_2_11_graphs.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/eq_2_11_graphs.lean`
DataTypesAsLattices/Lambda/eq_2_12.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/eq_2_12.lean`

DataTypesAsLattices/Lambda/eq_2_13.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_13.lean
DataTypesAsLattices/Lambda/eq_2_9.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_9.lean
DataTypesAsLattices/Lambda/eta_fails.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/eta_fails.lean
DataTypesAsLattices/Lambda/funOf_bot.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/funOf_bot.lean
DataTypesAsLattices/Lambda/funOf_iUnion.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/funOf_iUnion.lean
DataTypesAsLattices/Lambda/funOf_isScottContinuous_left.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/funOf_isScottContinuous_left.lean
DataTypesAsLattices/Lambda/funOf_diag_iUnion.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/funOf_diag_iUnion.lean
DataTypesAsLattices/Lambda/table1_mu.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/table1_mu.lean
DataTypesAsLattices/Lambda/xi_star.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/xi_star.lean
DataTypesAsLattices/Lambda/FUN.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/FUN.lean

2.28.3 AI: AI-Lean to AI-English

2.29 Elementary definitions

2.29.1 Human-English

We state now a sequence of minor results which show why some simple functions and constants are LAMBDA-definable.

$$(2.14) \quad \bot = (\lambda x.\, x(x))(\lambda x.\, x(x));$$

$$(2.15) \quad x \cup y = (\lambda z.\, 0) \supset x, y; \quad \text{(Hint: } 0, 1 \in \lambda z.\, 0)$$

$$(2.16) \quad \top = \mathbf{Y}(\lambda x.\, 0 \cup (x+1));$$

$$(2.17) \quad x \cap y = \mathbf{Y}(\lambda f \lambda x \lambda y.\, x \supset (y \supset 0, \bot), f(x-1)(y-1)+1)(x)(y).$$

The elements $\bot$ and $\top$ are graphs, by the way, and we can characterize them as the only fixed points of the combinator $\mathbf{K}$:

$$(2.18) \quad a = \lambda x.\, a \quad \text{iff} \quad a = \bot \quad \text{or} \quad a = \top.$$

2.29.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Computability/topRecTerm.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/topRecTerm.lean
DataTypesAsLattices/Computability/topRecTerm_interp.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/topRecTerm_interp.lean
DataTypesAsLattices/Lambda/eq_2_16.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_16.lean
DataTypesAsLattices/Lambda/eq_2_17_step.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_17_step.lean
DataTypesAsLattices/Lambda/eq_2_18_bot.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_18_bot.lean
DataTypesAsLattices/Lambda/eq_2_18_top.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_18_top.lean
DataTypesAsLattices/Lambda/eq_2_14.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_14.lean
DataTypesAsLattices/Lambda/eq_2_15.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_15.lean
DataTypesAsLattices/Lambda/interC_else_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/interC_else_isScottContinuous.l
DataTypesAsLattices/Lambda/interC_body_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/interC_body_isScottContinuous.l
DataTypesAsLattices/Lambda/interC_then_else_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/interC_then_else_isScottContinuous.lean
DataTypesAsLattices/Lambda/interStep_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/interStep_isScottContinuous.lea
DataTypesAsLattices/Lambda/interC_unfold.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/interC_unfold.lean
DataTypesAsLattices/Lambda/interC_app_graph.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/interC_app_graph.lean
DataTypesAsLattices/Lambda/interC_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/interC_app.lean
DataTypesAsLattices/Lambda/eq_2_17.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_17.lean
DataTypesAsLattices/Lambda/topRec_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/topRec_isScottContinuous.lean
DataTypesAsLattices/Lambda/eq_2_18.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_18.lean
DataTypesAsLattices/Lambda/union_via_cond.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/union_via_cond.lean
DataTypesAsLattices/Lambda/interStep.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/interStep.lean
DataTypesAsLattices/Lambda/interC.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/interC.lean

DataTypesAsLattices/Lambda/topRec.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/topRec.lean`

2.29.3 AI: AI-Lean to AI-English

2.30 Sequences

2.30.1 Human-English

Next we use the notation $\langle x_0, x_1, \ldots, x_{n-1}\rangle$ for the function $\hat{p}$ where $p : \omega \to \mathbf{P}\omega$ is defined by:

$$p(i) = \begin{cases} x_i & \text{if } i < n; \\ \bot & \text{if } i \geq n. \end{cases}$$

$$\langle\rangle = \bot \tag{2.19}$$

$$\langle x\rangle = \lambda z.\, z \supset x, \bot \tag{2.20}$$

$$\langle x, y\rangle = \lambda z.\, z \supset x, (z - 1 \supset y, \bot) \tag{2.21}$$

$$\langle x_0, x_1, \ldots, x_n\rangle = \lambda z.\, z \supset x_0, \langle x_1, \ldots, x_n\rangle(z - 1). \tag{2.22}$$

Obviously we should formalize the subscript notation so that $u_x = u(x)$; then we find:

$$\langle x_0, x_1, \ldots, x_n\rangle_i = \begin{cases} x_i & \text{if } i < n; \\ \bot & \text{if } i \geq n. \end{cases} \tag{2.23}$$

This gives us the method of LAMBDA-defining *finite sequences* (in a quite natural way), and the next step is to consider *infinite sequences*. But these are just the functions $\hat{p}$ where $p : \omega \to \mathbf{P}\omega$ is arbitrary. What we need then is a condition expressible in the language equivalent to saying $u = \hat{p}$ for some p. This is the same as

$$u = \lambda x. \bigcup\{u_i \mid i \in x\}.$$

2.30.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Lambda/mem_seqFunLt.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/mem_seqFunLt.lean`
DataTypesAsLattices/Lambda/seq2_body_isScottContinuous.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/seq2_body_isScottContinuous.lea`
DataTypesAsLattices/Lambda/seq2_app.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/seq2_app.lean`
DataTypesAsLattices/Lambda/eq_2_23_ge.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/eq_2_23_ge.lean`
DataTypesAsLattices/Lambda/seq2_app_one.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/seq2_app_one.lean`

DataTypesAsLattices/Lambda/eq_2_23_one.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_23_one.lean
DataTypesAsLattices/Lambda/seq2_app_zero.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seq2_app_zero.lean
DataTypesAsLattices/Lambda/eq_2_23_zero.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_23_zero.lean
DataTypesAsLattices/Lambda/seq2_tag_ne.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seq2_tag_ne.lean
DataTypesAsLattices/Lambda/seqCons_body.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seqCons_body.lean
DataTypesAsLattices/Lambda/eq_2_22.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_22.lean
DataTypesAsLattices/Lambda/seqFunLt_zero.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seqFunLt_zero.lean
DataTypesAsLattices/Lambda/seqFun_eq_iUnion_lt.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seqFun_eq_iUnion_lt.lean
DataTypesAsLattices/Lambda/seqFun_left_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seqFun_left_isScottContinuous.l
DataTypesAsLattices/Lambda/seqFun_right_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seqFun_right_isScottContinuous.
DataTypesAsLattices/Lambda/seqShift_left_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seqShift_left_isScottContinuous
DataTypesAsLattices/Lambda/seqShift_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seqShift_isScottContinuous.lean
DataTypesAsLattices/Lambda/seqShift_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seqShift_app.lean
DataTypesAsLattices/Lambda/seqShift_ofNat.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seqShift_ofNat.lean
DataTypesAsLattices/Lambda/seqFunLt_succ.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seqFunLt_succ.lean
DataTypesAsLattices/Lambda/seqFunLt_succ_term.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seqFunLt_succ_term.lean
DataTypesAsLattices/Lambda/seq0.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seq0.lean
DataTypesAsLattices/Lambda/seq1.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seq1.lean
DataTypesAsLattices/Lambda/seq2.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seq2.lean
DataTypesAsLattices/Lambda/seqCons.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seqCons.lean
DataTypesAsLattices/Lambda/seqFunLt.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seqFunLt.lean
DataTypesAsLattices/Lambda/seqShift.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/seqShift.lean

2.30.3 AI: AI-Lean to AI-English

2.31 Distributive functions

2.31.1 Human-English

The $\cup$- and set-notation is not part of LAMBDA. We are forced into a recursive definition:

$$(2.24) \quad \$ = \mathbf{Y}(\lambda s \lambda u \lambda z.\, z \supset u_0,\, s(\lambda t.\, u_{t+1})(z-1)).$$

This equation generalizes (2.22) and we have:

$$(2.25) \quad \$(u) = \lambda x.\, \bigcup \{u_i \mid i \in x\}.$$

Thus the combinator \$ "revalues" an element as a distributive function. This suggests introducing the λ-notation for such functions by the equation:

$$(2.26) \quad \lambda n \in \omega.\, \tau = \$(\lambda z.\, \tau[z/n]).$$

With all these conventions LAMBDA-notation becomes very much like ordinary mathematical notation without too much strain.

2.31.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Lambda/dollarStepTerm_interp.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/dollarStepTerm_interp.lean`
DataTypesAsLattices/Lambda/dollarStepBody_isScottContinuous_s.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/dollarStepBody_isScottContinuous_s.lean`
DataTypesAsLattices/Lambda/dollarStep_isScottContinuous.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/dollarStep_isScottContinuous.le`
DataTypesAsLattices/Lambda/dollarStepBody_isScottContinuous_z.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/dollarStepBody_isScottContinuous_z.lean`
DataTypesAsLattices/Lambda/dollarC_app.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/dollarC_app.lean`
DataTypesAsLattices/Lambda/eq_2_25.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/eq_2_25.lean`
DataTypesAsLattices/Lambda/dollarStepBody_isScottContinuous_u.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/dollarStepBody_isScottContinuous_u.lean`
DataTypesAsLattices/Lambda/dollarStep_app.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/dollarStep_app.lean`
DataTypesAsLattices/Lambda/dollarStep_app2.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/dollarStep_app2.lean`
DataTypesAsLattices/Lambda/eq_2_24.lean
Lean source: `DomainTheory/DataTypesAsLattices/Lambda/eq_2_24.lean`
DataTypesAsLattices/Lambda/dollarStep_iterate.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dollarStep_iterate.lean

DataTypesAsLattices/Lambda/dollarStep_fix_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dollarStep_fix_app.lean

DataTypesAsLattices/Lambda/eq_2_24_Y.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_24_Y.lean

DataTypesAsLattices/Lambda/termDollarStepBody_isScottContinuous_s.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/termDollarStepBody_isScottContinuous_s.lean

DataTypesAsLattices/Lambda/termDollarStepBody_isScottContinuous_z.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/termDollarStepBody_isScottContinuous_z.lean

DataTypesAsLattices/Lambda/termDollarStep_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/termDollarStep_isScottContinuous.lean

DataTypesAsLattices/Lambda/termDollarStepBody_isScottContinuous_u.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/termDollarStepBody_isScottContinuous_u.lean

DataTypesAsLattices/Lambda/termDollarStep_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/termDollarStep_app.lean

DataTypesAsLattices/Lambda/termDollarStep_app2.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/termDollarStep_app2.lean

DataTypesAsLattices/Lambda/termDollarStep_iterate.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/termDollarStep_iterate.lean

DataTypesAsLattices/Lambda/termDollarStep_fix_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/termDollarStep_fix_app.lean

DataTypesAsLattices/Lambda/dollarC_eq_fix_termDollarStep.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dollarC_eq_fix_termDollarStep.lean

DataTypesAsLattices/Lambda/dollarStepTerm.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dollarStepTerm.lean

DataTypesAsLattices/Lambda/seqFun.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/seqFun.lean

DataTypesAsLattices/Lambda/dollarC.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dollarC.lean

DataTypesAsLattices/Lambda/lamOmega.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/lamOmega.lean

DataTypesAsLattices/Lambda/dollarStepBody.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dollarStepBody.lean

DataTypesAsLattices/Lambda/dollarStep.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/dollarStep.lean

DataTypesAsLattices/Lambda/termDollarStepBody.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/termDollarStepBody.lean
DataTypesAsLattices/Lambda/termDollarStep.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/termDollarStep.lean

2.31.3 AI: AI-Lean to AI-English

2.32 Primitive recursion

2.32.1 Human-English

Suppose that f is any continuous function and $a \in \mathbf{P}\omega$. We can define $p : \omega \to \mathbf{P}\omega$ in the ordinary way by primitive recursion where:

$$p(0) = a;$$

$$p(n+1) = f(n)(p(n)).$$

The question is: can we give a LAMBDA-definition for $\hat{p}$ (in terms of f and a as constants, say)? The answer is clear, for we can prove:

$$\hat{p} = \mathbf{Y}(\lambda u \lambda n \in \omega.\, n \supset a,\ f(n-1)(u(n-1))). \tag{2.27}$$

This already shows that a large part of the definitions of recursion theory can be given in this special language. Of course, simultaneous (primitive) recursions can be transcribed into LAMBDA with the aid of the ordered tuples of (2.22), (2.23) above. But we can go further and connect with partial (and general) recursive functions. We state first a definition.

2.32.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Computability/primRecComb.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecComb.lean
DataTypesAsLattices/Computability/primRecComb_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecComb_combinatory.lean
DataTypesAsLattices/Computability/primRecComb_ofNat.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecComb_ofNat.lean
DataTypesAsLattices/Computability/primRecOpC_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecOpC_app.lean
DataTypesAsLattices/Computability/primRecOpEnv.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecOpEnv.lean
DataTypesAsLattices/Computability/primRecOpEnv_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecOpEnv_combinatory.lean
DataTypesAsLattices/Computability/primRecOpC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecOpC_combinatory.lean

DataTypesAsLattices/Computability/primRecOpTerm.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecOpTerm.lean

DataTypesAsLattices/Computability/primRecOpC.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecOpC.lean

DataTypesAsLattices/Computability/primRecVal_add.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecVal_add.lean

DataTypesAsLattices/Computability/primRecVal_mul.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecVal_mul.lean

DataTypesAsLattices/Computability/primRecZeroC.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecZeroC.lean

DataTypesAsLattices/Computability/primRecZeroC_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecZeroC_app.lean

DataTypesAsLattices/Computability/primRecZeroC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecZeroC_combinatory.lean

DataTypesAsLattices/Computability/primRecVal_sub.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecVal_sub.lean

DataTypesAsLattices/Computability/primRecVal_sqrt.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/primRecVal_sqrt.lean

DataTypesAsLattices/Lambda/primRecHat_zero.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/primRecHat_zero.lean

DataTypesAsLattices/Lambda/primRecHat_ofNat.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/primRecHat_ofNat.lean

DataTypesAsLattices/Lambda/primRecStep_body_isScottContinuous_n.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/primRecStep_body_isScottContinuous_n.lean

DataTypesAsLattices/Lambda/primRecStep_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/primRecStep_app.lean

DataTypesAsLattices/Lambda/primRecStep_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/primRecStep_isScottContinuous.l

DataTypesAsLattices/Lambda/primRecVal_fix.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/primRecVal_fix.lean

DataTypesAsLattices/Lambda/eq_2_27.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_27.lean

DataTypesAsLattices/Lambda/primRecStep.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/primRecStep.lean

DataTypesAsLattices/Lambda/primRecStepTerm.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/primRecStepTerm.lean

DataTypesAsLattices/Lambda/primRecVal.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/primRecVal.lean
DataTypesAsLattices/Lambda/primRecHat.lean
Lean source: DomainTheory/DataTypesAsLattices/Lambda/primRecHat.lean

2.32.3 AI: AI-Lean to AI-English

2.33 Definition

DEFINITION. A continuous function f of k-variables is *computable* iff the relationship

$$m \in f(e_{n_0})(e_{n_1}) \cdots (e_{n_{k-1}})$$

is recursively enumerable (r.e.) in the integer variables $m, n_0, n_1, \ldots, n_{k-1}$.

If q is a partial recursive function in the usual sense, then we can regard it as a mapping $q : \omega \to \omega \cup \{\perp\}$, where $q(n) = \perp$ means that q is undefined at n. Saying that q is partial recursive is just to say that $m \in q(n)$ is r.e. as a relation in n and m. It is easy to see that this is in turn equivalent to the recursive enumerability of the relationship $m \in \hat{q}(e_n)$; and so our definition is formally a generalization of the usual one. But it is also intuitively reasonable. To "compute" $y = f(x)$, in the one-variable case, we proceed by enumeration. First we begin the enumeration of all finite subsets $e_n \subseteq x$. For each of these f starts up an enumeration of the set $f(e_n)$; so we sit back and observe which $m \in f(e_n)$ by enumeration. The totality of all such m for all $e_n \subseteq x$ forms in the end the set y.

2.34 Computable functions

2.34.1 AI: Human-English to AI-Lean

DataTypesAsLattices/Computability/LambdaDefinable.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/LambdaDefinable.lean
DataTypesAsLattices/Computability/IsRE.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsRE.lean
DataTypesAsLattices/Computability/IsComputable.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsComputable.lean
DataTypesAsLattices/Computability/ComputableFin.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/ComputableFin.lean
DataTypesAsLattices/Computability/REPredu2ecomp.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/REPredu2ecomp.lean
DataTypesAsLattices/Computability/IsREu2ehasZero.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2ehasZero.lean
DataTypesAsLattices/Computability/IsREu2enumeral.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2enumeral.lean
DataTypesAsLattices/Computability/IsREu2epredSet.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2epredSet.lean
DataTypesAsLattices/Computability/IsREu2ezeroC.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2ezeroC.lean
DataTypesAsLattices/Computability/REPredu2eand.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/REPredu2eand.lean

DataTypesAsLattices/Computability/IsREu2esuccSet.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2esuccSet.lean
DataTypesAsLattices/Computability/REPredu2eempty.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/REPredu2eempty.lean
DataTypesAsLattices/Computability/IsREu2ebot.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2ebot.lean
DataTypesAsLattices/Computability/REPredu2eexists.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/REPredu2eexists.lean
DataTypesAsLattices/Computability/IsREu2ehasPos.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2ehasPos.lean
DataTypesAsLattices/Computability/REPredu2eor.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/REPredu2eor.lean
DataTypesAsLattices/Computability/IsREu2econdSet.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2econdSet.lean
DataTypesAsLattices/Computability/IsREu2eunion.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2eunion.lean
DataTypesAsLattices/Computability/IsREu2eofFinset.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2eofFinset.lean
DataTypesAsLattices/Computability/IsREu2eof_e.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2eof_e.lean
DataTypesAsLattices/Computability/REPredu2etrue.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/REPredu2etrue.lean
DataTypesAsLattices/Computability/IsREu2etop.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2etop.lean
DataTypesAsLattices/Computability/IsREu2edcondSet.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2edcondSet.lean
DataTypesAsLattices/Computability/eSubset_e_iff.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/eSubset_e_iff.lean
DataTypesAsLattices/Computability/eSubset_funOf_e_iff.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/eSubset_funOf_e_iff.lean
DataTypesAsLattices/Computability/eSubset_iff_stage.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/eSubset_iff_stage.lean
DataTypesAsLattices/Computability/lt_two_pow_of_high_bits.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/lt_two_pow_of_high_bits.lean
DataTypesAsLattices/Computability/bits_subset_lt_two_pow.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/bits_subset_lt_two_pow.lean
DataTypesAsLattices/Computability/mem_Scomb_iff.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/mem_Scomb_iff.lean

DataTypesAsLattices/Computability/mem_funOf_e_iff.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/mem_funOf_e_iff.lean

DataTypesAsLattices/Computability/mem_graph_const_iff.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/mem_graph_const_iff.lean

DataTypesAsLattices/Computability/pos_bit_iff.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/pos_bit_iff.lean

DataTypesAsLattices/Computability/mem_condC_iff.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/mem_condC_iff.lean

DataTypesAsLattices/Computability/primrecPred_bool.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrecPred_bool.lean

DataTypesAsLattices/Computability/primrec_enumFun.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrec_enumFun.lean

DataTypesAsLattices/Computability/primrec_pack4_proj1.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrec_pack4_proj1.lean

DataTypesAsLattices/Computability/primrec_pack4_proj2.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrec_pack4_proj2.lean

DataTypesAsLattices/Computability/primrec_pack4_proj3.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrec_pack4_proj3.lean

DataTypesAsLattices/Computability/primrec_pack4_proj4.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrec_pack4_proj4.lean

DataTypesAsLattices/Computability/primrec_pair.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrec_pair.lean

DataTypesAsLattices/Computability/IsREu2epair_mem.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2epair_mem.lean

DataTypesAsLattices/Computability/primrecPred_Scomb_eq.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrecPred_Scomb_eq.lean

DataTypesAsLattices/Computability/primrecPred_eq_scott_pair.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrecPred_eq_scott_pair.lean

DataTypesAsLattices/Computability/IsREu2egraph_of_primrecRel.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2egraph_of_primrecRel.lean

DataTypesAsLattices/Computability/IsREu2egraph_of_re.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2egraph_of_re.lean

DataTypesAsLattices/Computability/primrec_succ_sq.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrec_succ_sq.lean

DataTypesAsLattices/Computability/primrec_twoPow.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrec_twoPow.lean

DataTypesAsLattices/Computability/primrec_testBit.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrec_testBit.lean

DataTypesAsLattices/Computability/IsREu2eKcomb.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2eKcomb.lean

DataTypesAsLattices/Computability/IsREu2econdC.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2econdC.lean

DataTypesAsLattices/Computability/IsREu2epredC.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2epredC.lean

DataTypesAsLattices/Computability/IsREu2esucC.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2esucC.lean

DataTypesAsLattices/Computability/primrecPred_common_stage.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrecPred_common_stage.lean

DataTypesAsLattices/Computability/IsREu2eeSubset.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2eeSubset.lean

DataTypesAsLattices/Computability/IsREu2efunOf.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2efunOf.lean

DataTypesAsLattices/Computability/primrecRel_eSubset.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrecRel_eSubset.lean

DataTypesAsLattices/Computability/primrecRel_mem_funOf_e.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrecRel_mem_funOf_e.lean

DataTypesAsLattices/Computability/primrecRel_Scomb_bit.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrecRel_Scomb_bit.lean

DataTypesAsLattices/Computability/primrecPred_Scomb_subset.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrecPred_Scomb_subset.lean

DataTypesAsLattices/Computability/primrecRel_Scomb_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrecRel_Scomb_app.lean

DataTypesAsLattices/Computability/primrecRel_eSubset_funOf_e_bit.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrecRel_eSubset_funOf_e_bit.lean

DataTypesAsLattices/Computability/primrecRel_eSubset_funOf_e.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrecRel_eSubset_funOf_e.lean
DataTypesAsLattices/Computability/primrecRel_testBit.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrecRel_testBit.lean
DataTypesAsLattices/Computability/rePred_Scomb_nested.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/rePred_Scomb_nested.lean
DataTypesAsLattices/Computability/IsREu2eScomb.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2eScomb.lean
DataTypesAsLattices/Computability/primrec_realized.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/primrec_realized.lean
DataTypesAsLattices/Computability/IsREu2ecombinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2ecombinatory.lean
DataTypesAsLattices/Computability/IsREu2eiff_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/IsREu2eiff_combinatory.lean

2.34.2 AI: AI-Lean to AI-English

(Already included: 1976_Definition_computable.md.)

2.35 Definability

2.35.1 Human-English

As a hint for the proof we may note that the method of (2.27) shows that all primitive recursive functions p have the corresponding $\hat{p}$ LAMBDA-definable. Next we remark that a nonempty r.e. set is the range of a primitive recursive function; but the range of p is $\hat{p}(\top)$, which is clearly LAMBDA-definable. That any LAMBDA-definable set (graph) is r.e. is obvious from the definition of the language itself.

2.35.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Computability/Realizes.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/Realizes.lean
DataTypesAsLattices/Computability/Realizes2.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/Realizes2.lean
DataTypesAsLattices/Computability/SK_comp.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/SK_comp.lean
DataTypesAsLattices/Computability/addC_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/addC_app.lean
DataTypesAsLattices/Computability/addStepC.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/addStepC.lean
DataTypesAsLattices/Computability/addC.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/addC.lean

DataTypesAsLattices/Computability/addStepC_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/addStepC_combinatory.lean
DataTypesAsLattices/Computability/addC_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/addC_combinatory.lean
DataTypesAsLattices/Computability/botElem_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/botElem_combinatory.lean
DataTypesAsLattices/Computability/composeC.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/composeC.lean
DataTypesAsLattices/Computability/composeC_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/composeC_combinatory.lean
DataTypesAsLattices/Computability/composeC_realizes.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/composeC_realizes.lean
DataTypesAsLattices/Computability/constComb.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/constComb.lean
DataTypesAsLattices/Computability/constComb_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/constComb_combinatory.lean
DataTypesAsLattices/Computability/constComb_realizes.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/constComb_realizes.lean
DataTypesAsLattices/Computability/enumFun.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/enumFun.lean
DataTypesAsLattices/Computability/enumRangeC.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/enumRangeC.lean
DataTypesAsLattices/Computability/enumRangeC_eq.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/enumRangeC_eq.lean
DataTypesAsLattices/Computability/isZeroC.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/isZeroC.lean
DataTypesAsLattices/Computability/isZeroC_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/isZeroC_combinatory.lean
DataTypesAsLattices/Computability/isZeroC_succ.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/isZeroC_succ.lean
DataTypesAsLattices/Computability/isZeroC_zero.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/isZeroC_zero.lean
DataTypesAsLattices/Computability/mulC.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/mulC.lean
DataTypesAsLattices/Computability/mulC_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/mulC_app.lean

DataTypesAsLattices/Computability/mulC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/mulC_combinatory.lean

DataTypesAsLattices/Computability/pack4.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/pack4.lean

DataTypesAsLattices/Computability/pack4_proj1.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/pack4_proj1.lean

DataTypesAsLattices/Computability/pack4_proj2.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/pack4_proj2.lean

DataTypesAsLattices/Computability/pack4_proj3.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/pack4_proj3.lean

DataTypesAsLattices/Computability/pack4_proj4.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/pack4_proj4.lean

DataTypesAsLattices/Computability/pairTerm.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/pairTerm.lean

DataTypesAsLattices/Computability/condSet_e_iff.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/condSet_e_iff.lean

DataTypesAsLattices/Computability/precTerm.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/precTerm.lean

DataTypesAsLattices/Computability/addC_realizes2.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/addC_realizes2.lean

DataTypesAsLattices/Computability/mulC_realizes2.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/mulC_realizes2.lean

DataTypesAsLattices/Computability/combinatory_isRE.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/combinatory_isRE.lean

DataTypesAsLattices/Computability/safePredC.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/safePredC.lean

DataTypesAsLattices/Computability/safePredC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/safePredC_combinatory.lean

DataTypesAsLattices/Computability/safePredC_succ.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/safePredC_succ.lean

DataTypesAsLattices/Computability/safePredC_zero.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/safePredC_zero.lean

DataTypesAsLattices/Computability/sqrtIter.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/sqrtIter.lean

DataTypesAsLattices/Computability/sqrtIter_eq_min.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/sqrtIter_eq_min.lean

DataTypesAsLattices/Computability/sqrtIter_self.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/sqrtIter_self.lean

DataTypesAsLattices/Computability/sqrtStepTerm.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/sqrtStepTerm.lean

DataTypesAsLattices/Computability/subC_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/subC_app.lean

DataTypesAsLattices/Computability/subC_realizes2.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/subC_realizes2.lean

DataTypesAsLattices/Computability/leC_realizes2.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/leC_realizes2.lean

DataTypesAsLattices/Computability/pairComb_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/pairComb_app.lean

DataTypesAsLattices/Computability/pairRealizer_realizes.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/pairRealizer_realizes.lean

DataTypesAsLattices/Computability/sqrtStepC_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/sqrtStepC_app.lean

DataTypesAsLattices/Computability/sqrtC_realizes.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/sqrtC_realizes.lean

DataTypesAsLattices/Computability/subStepC.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/subStepC.lean

DataTypesAsLattices/Computability/subC.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/subC.lean

DataTypesAsLattices/Computability/arithEnv.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/arithEnv.lean

DataTypesAsLattices/Computability/leC.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/leC.lean

DataTypesAsLattices/Computability/pairComb.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/pairComb.lean

DataTypesAsLattices/Computability/pairRealizer.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/pairRealizer.lean

DataTypesAsLattices/Computability/sqrtEnv.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/sqrtEnv.lean

DataTypesAsLattices/Computability/sqrtStepC.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/sqrtStepC.lean

DataTypesAsLattices/Computability/sqrtC.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/sqrtC.lean

DataTypesAsLattices/Computability/subStepC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/subStepC_combinatory.lean

DataTypesAsLattices/Computability/subC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/subC_combinatory.lean

DataTypesAsLattices/Computability/arithEnv_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/arithEnv_combinatory.lean

DataTypesAsLattices/Computability/leC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/leC_combinatory.lean

DataTypesAsLattices/Computability/pairComb_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/pairComb_combinatory.lean

DataTypesAsLattices/Computability/pairRealizer_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/pairRealizer_combinatory.lean

DataTypesAsLattices/Computability/sqrtEnv_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/sqrtEnv_combinatory.lean

DataTypesAsLattices/Computability/sqrtStepC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/sqrtStepC_combinatory.lean

DataTypesAsLattices/Computability/sqrtC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/sqrtC_combinatory.lean

DataTypesAsLattices/Computability/topElem_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/topElem_combinatory.lean

DataTypesAsLattices/Computability/enumRangeC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/enumRangeC_combinatory.lean

DataTypesAsLattices/Computability/unpairEnv.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/unpairEnv.lean

DataTypesAsLattices/Computability/unpairEnv_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/unpairEnv_combinatory.lean

DataTypesAsLattices/Computability/unpairFstC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/unpairFstC_combinatory.lean

DataTypesAsLattices/Computability/unpairFstC_realizes.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/unpairFstC_realizes.lean

DataTypesAsLattices/Computability/unpairSndC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/unpairSndC_combinatory.lean

DataTypesAsLattices/Computability/precEnv_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/precEnv_combinatory.lean

DataTypesAsLattices/Computability/precC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/precC_combinatory.lean

DataTypesAsLattices/Computability/unpairSndC_realizes.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/unpairSndC_realizes.lean

DataTypesAsLattices/Computability/precC_realizes.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/precC_realizes.lean
DataTypesAsLattices/Computability/unpairSqrtTerm.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/unpairSqrtTerm.lean
DataTypesAsLattices/Computability/unpairSquareTerm.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/unpairSquareTerm.lean
DataTypesAsLattices/Computability/unpairDeltaTerm.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/unpairDeltaTerm.lean
DataTypesAsLattices/Computability/unpairTestTerm.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/unpairTestTerm.lean
DataTypesAsLattices/Computability/unpairFstTerm.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/unpairFstTerm.lean
DataTypesAsLattices/Computability/unpairFstC.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/unpairFstC.lean
DataTypesAsLattices/Computability/unpairSndTerm.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/unpairSndTerm.lean
DataTypesAsLattices/Computability/unpairSndC.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/unpairSndC.lean
DataTypesAsLattices/Computability/precEnv.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/precEnv.lean
DataTypesAsLattices/Computability/precC.lean
Lean source: DomainTheory/DataTypesAsLattices/Computability/precC.lean

2.35.3 AI: AI-Lean to AI-English

2.36 Theorem 2.6

2.36.1 Human-English

THEOREM 2.6 (The definability theorem). *For a k-ary continuous function f, the following are equivalent:*

(i) f is computable;

(ii) $\lambda x_0 \lambda x_1 \cdots \lambda x_{k-1}.\, f(x_0)(x_1)\cdots(x_{k-1})$ as a set is r.e.;

(iii) $\lambda x_0 \lambda x_1 \cdots \lambda x_{k-1}.\, f(x_0)(x_1)\cdots(x_{k-1})$ is LAMBDA-definable.

As a hint for the proof we may note that the method of (2.27) shows that all primitive recursive functions p have the corresponding $\hat{p}$ LAMBDA-definable. Next we remark that a nonempty r.e. set is the range of a primitive recursive function; but the range of p is $\hat{p}(\top)$, which is clearly LAMBDA-definable. That any LAMBDA-definable set (graph) is r.e. is obvious from the definition of the language itself.

We may draw some interesting conclusions from the definability theorem. In the first place, we see that the countable collection $\mathbf{RE} \subseteq \mathbf{P}\omega$ of r.e. sets is closed under application and LAMBDA-definability. Indeed it forms a model for the λ-calculus (axioms (α), (β), and (ξ^*) at least) and it also contains the arithmetical combinators. (Clearly there will be many intermediate submodels.) In the second place, we can see now how very easy it is to interpret λ-calculus in ordinary arithmetical recursion theory by means of quite elementary operations on r.e. sets. Thus the equivalence of λ-definability with partial recursiveness

seems not to be all that good a piece of evidence for Church's Thesis. In his 1936 paper (a footnote on p. 346) Church says about λ-definability:

> The fact, however, that two such widely different and (in the opinion of the author) equally natural definitions of effective calculability turn out to be equivalent adds to the strength of the reasons adduced below for believing that they constitute as general a characterization of this notion as is consistent with the usual intuitive understanding of it.

The point never struck the present author as an especially telling one, and the reduction of λ-calculus to r.e. theory shows that the divergence between the theories is not at all wide. Of course it is a pleasant surprise to see how many complicated things can be defined in pure λ-calculus (without arithmetical combinators), but this fact cuts the wrong way as evidence for the thesis (we want stronger theories, not weaker ones). Post systems (or even first-order theories) are much better to mention in this connection, since they are obviously more inclusive in giving enumerations than Turing machines or Herbrand–Gödel recursion equations. But the equivalence proofs are all so easy! What one would like to see is a "natural" definition where the equivalence with r.e. is not just a mechanical exercise involving a few tricks of coding.

In the course of the development in this section we have stated many equations which are not found in Table 1, and which involve new combinators. In conclusion we would like to mention an equation about $\mathbf{Y}$ which holds in the model, which can be stated in pure λ-calculus, and which cannot be proved by ordinary reduction (though we shall not try to justify this last statement here). In order to shorten the calculations, we note from definition (2.8) that $\mathbf{Y}(u) = \mathbf{Y}(\lambda y.\, u(y))$; so by Theorem 2.5 this also equals $u(\mathbf{Y}(u))$.

$$(2.28) \quad \mathbf{Y}(\lambda f \lambda x.\, g(x)(f(x))) = \lambda x.\, \mathbf{Y}(g(x)).$$

Call the left side f' and the right f''. Now $f'' = \lambda x.\, g(x)(\mathbf{Y}(g(x))) = \lambda x.\, g(x)(f''(x))$, thus $f' \subseteq f''$, because f' is a least fixed point. On the other hand $f' = \lambda x.\, g(x)(f'(x))$, so $f'(x) = g(x)(f'(x))$. Thus $f''(x) \subseteq f'(x)$, because $f''(x)$ is a least fixed point. As this holds for all x, we see that $f'' \subseteq f'$; and so they are equal. There must be many other such equations.

2.36.2 Motivation

The three conditions meet as follows. Passing from a computable f to its iterated graph replaces $m \in f(e_{n_0})(e_{n_1}) \cdots (e_{n_{k-1}})$ by membership of the iterated pair $(n_0, (n_1, (\cdots, (n_{k-1}, m) \cdots)))$ in that graph, so the function is computable exactly when the graph is r.e. The hint above shows that an r.e. graph is LAMBDA-definable. In the other direction each of the six combinators of Theorem 2.4 is r.e., and application preserves r.e. sets: $m \in u(x)$ is an existential quantification over a finite $e_n \subseteq x$ together with a bounded universal quantification, and membership in u and in x occurs positively.

2.36.3 AI: Human-English to AI-Lean

DataTypesAsLattices/Computability/theorem_2_6.lean

Lean source: `DomainTheory/DataTypesAsLattices/Computability/theorem_2_6.lean`

DataTypesAsLattices/Computability/theorem_2_6_combinatory_zero.lean

Lean source: `DomainTheory/DataTypesAsLattices/Computability/theorem_2_6_combinatory_zero.lean`

DataTypesAsLattices/Computability/theorem_2_6_fin.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/theorem_2_6_fin.lean

DataTypesAsLattices/Computability/theorem_2_6_lambda_continuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/theorem_2_6_lambda_continuous.lean

DataTypesAsLattices/Computability/theorem_2_6_ofNat_isRE.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability/theorem_2_6_ofNat_isRE.lean

DataTypesAsLattices/Computability.lean

Lean source: DomainTheory/DataTypesAsLattices/Computability.lean

2.36.4 AI: AI-Lean to AI-English

2.36.5 AI: AI-English to Human-English Concordance

(Already included: 1976_Theorem_2_6.md.)

2.37 A law of Y

2.37.1 Human-English

In the course of the development in this section we have stated many equations which are not found in Table 1, and which involve new combinators. In conclusion we would like to mention an equation about $\mathbf{Y}$ which holds in the model, which can be stated in pure λ-calculus, and which cannot be proved by ordinary reduction (though we shall not try to justify this last statement here). In order to shorten the calculations, we note from definition (2.8) that $\mathbf{Y}(u) = \mathbf{Y}(\lambda y.\, u(y))$; so by Theorem 2.5 this also equals $u(\mathbf{Y}(u))$.

$$(2.28) \quad \mathbf{Y}(\lambda f \lambda x.\, g(x)(f(x))) = \lambda x.\, \mathbf{Y}(g(x)).$$

Call the left side f' and the right f''. Now $f'' = \lambda x.\, g(x)(\mathbf{Y}(g(x))) = \lambda x.\, g(x)(f''(x))$, thus $f' \subseteq f''$, because f' is a least fixed point. On the other hand $f' = \lambda x.\, g(x)(f'(x))$, so $f'(x) = g(x)(f'(x))$. Thus $f''(x) \subseteq f'(x)$, because $f''(x)$ is a least fixed point. As this holds for all x, we see that $f'' \subseteq f'$; and so they are equal. There must be many other such equations.

2.37.2 AI: Human-English to AI-Lean

DataTypesAsLattices/Lambda/eq_2_28.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_28.lean

DataTypesAsLattices/Lambda/iterateBot_param_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/iterateBot_param_isScottContinuous.lean

DataTypesAsLattices/Lambda/fix_param_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/fix_param_isScottContinuous.lea

DataTypesAsLattices/Lambda/Ymap_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/Ymap_app.lean

DataTypesAsLattices/Lambda/eq_2_28_commute.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/eq_2_28_commute.lean

DataTypesAsLattices/Lambda/Ymap.lean

Lean source: DomainTheory/DataTypesAsLattices/Lambda/Ymap.lean

2.37.3 AI: AI-Lean to AI-English

2.38 Retracts and data types

2.38.1 Historical note

A retract is an ordinary notion of topology. The use of computable retracts as data types, the operations on those retracts, and the recursive definitions by fixed-point equations are Scott's. A continuous lattice, in the sense of Scott (1972), has continuous meet and join, and as a space it is a T_0-space satisfying the extension theorem. The connection between lattices and fixed points was already known. The set of all retracts is a complete lattice by Theorem 4.1, and it is not itself a continuous lattice. Ershov solved that question after the body of the paper was written; Hosono and Sato (1975) found essentially the same argument independently. The argument is given with the ordering of retracts. The correspondence was Scott's introduction to Ershov's numeration theory. Applications to the semantics of flow diagrams are in Scott (1971), and were taken up by Goguen et al. (1975) and by Reynolds (1974).

Dependencies. Inside Retracts, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

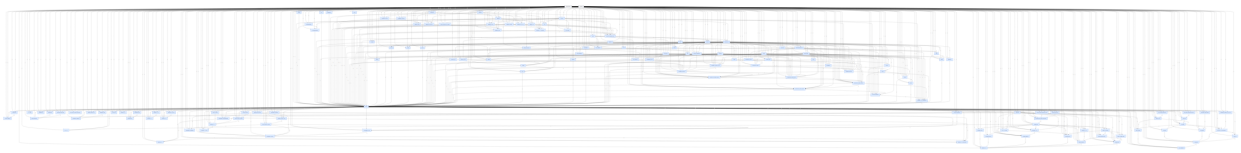


Figure 10: Historical note.

2.38.2 Human-English

Data can be structured in many ways: ordered tuples, lists, arrays, trees, streams, and even operations and functions. The last point becomes clear if one thinks of *parameters*. We would normally hardly consider the pairing function $\lambda x \lambda y.\, \langle x, y \rangle$ as being in itself a piece of data. But if we treat the first variable as a *parameter*, then it can be specialized to a *fixed value*, say the element a, producing the function $\lambda y.\, \langle a, y \rangle$. This function is more likely to be the output of some process and *in itself* can be considered as a datum. It is rather like one *whole row* of a matrix. If we were to regard a two-argument function f as being a matrix, then its ath row would be exactly $\lambda y.\, f(a)(y)$. If s were a selection function, then, for example, $\lambda y.\, f(s(y))(y)$ would represent the selection of one element out of each column of the matrix. This selection could be taken as a specialization of parameters in the operator $\lambda u \lambda v \lambda y.\, u(v(y))(y)$. We have not been very definite here about the exact nature of the fixed a, f, or s, or the range of the variable y or the range of values of the function f. The point is only to recall a few elements of structure and to suggest an abstract view of data going beyond the usual iterated arrays and trees.

What then is a *data type*? Answer: a type of data. That is to say, a collection of data that have been grouped together for reasons of similarity of structure or perhaps mere convenience. Thus the collection may very well be a mixed bag, but more often than not canons of taste or demands of simplicity dictate an adherence to regularity. The grouping may be formed to eliminate irrelevant objects and focus the attention

in other ways. It is frequently a matter of good organization that aids the understanding of complex definitions. In programming languages, one of the major reasons for making an explicit declaration of a data type (that is, the restriction of certain variables to certain *"modes"*) is that the computed objects of that type can enjoy a special *representation* in the machine that allows the manipulation of these objects via the chosen representation to be reasonably efficient. This is a very critical matter for good language design and good compiler writing. In this report, however, we cannot discuss the problems of representation, important as they may be. Our objective here is conceptual organization, and we wish to show how such ideas, in the language for computable functions used here, can find the proper expression.

Which are the data types that can be defined in LAMBDA? No final answer can be given since the number is infinite and inexhaustible. From one point of view, however, there is only one: $\mathbf{P}\omega$ itself. It is the universal type and all other types are subtypes of it; so $\mathbf{P}\omega$ plays a primary role in this exposition. But in a way it is too big, or at least too complex, since each of its elements can be used in so many different ways. When we specify a subtype the intention is to restrict attention to a special use. But even the various subtypes overlap, and so the same elements still get different uses. Style in writing definitions will usually make the differentiation clear though. The main innovation to be described in this section is the use of LAMBDA expressions to define types *as well as* elements. Certain expressions define *retracts* (or better: retraction mappings), and it is the *ranges* (or as we shall see: *sets of finite points*) of such retracts that form the groupings into types. Thus LAMBDA provides a calculus of type definitions including *recursive* type definitions. Examples will be explained both here and in the following sections. Note that types as retracts turn out to be types as *lattices*, that is, types of partial and many-valued objects. The problem of cutting these lattice types down to the perfect or complete objects is discussed in § 6. Another view of types and functionality of mappings is presented in § 7.

The notion of a retract comes from (analytic) topology, but it seems almost an accident that the idea can be applied in the present context. The word is employed not because there is some deep tie-up with topology but because it is short and rather descriptive. Three easy examples will motivate the general plan:

$$(4.1) \quad \mathbf{fun} = \lambda u \lambda x.\, u(x);$$

$$(4.2) \quad \mathbf{pair} = \lambda u.\, \langle u_0, u_1 \rangle;$$

$$(4.3) \quad \mathbf{bool} = \lambda u.\, u \sqsupset 0, 1.$$

Here $\sqsupset$ is the *doubly strict conditional* defined by

$$(4.4) \quad z \sqsupset x, y = z \supset (z \supset x, \top), (z \supset \top, y),$$

which has the property that if z is both zero and positive, then it takes the value $\top$ instead of the value $x \cup y$.

- Definition (retract)
- Definition (membership)
- Theorem 4.1
- Definition (ordering)

- Theorem 4.2
- Theorem 4.3
- Theorem 4.4
- Theorem 4.5
- Theorem 4.6

2.38.3 AI: Human-English to AI-Lean

DataTypesAsLattices/FixedLattices/DirectedSet.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedLattices/DirectedSet.lean
DataTypesAsLattices/FixedLattices/completeLatticeLE.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedLattices/completeLatticeLE.lean
DataTypesAsLattices/FixedLattices/completeLatticePreorder.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedLattices/completeLatticePreorder.
DataTypesAsLattices/FixedLattices/completeLatticeSupSet.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedLattices/completeLatticeSupSet.le
DataTypesAsLattices/FixedLattices/WayBelow.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedLattices/WayBelow.lean
DataTypesAsLattices/FixedLattices/IsCompact.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedLattices/IsCompact.lean
DataTypesAsLattices/FixedLattices/CountablyAlgebraic.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedLattices/CountablyAlgebraic.lean
DataTypesAsLattices/FixedLattices/ContinuousBasis.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedLattices/ContinuousBasis.lean
DataTypesAsLattices/FixedLattices/finiteBasisSups.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedLattices/finiteBasisSups.lean
DataTypesAsLattices/FixedLattices/finiteBasisSups_directed.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedLattices/finiteBasisSups_
directed.lean
DataTypesAsLattices/FixedLattices/sSup_finiteBasisSups.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedLattices/sSup_finiteBasisSups.lea
DataTypesAsLattices/FixedLattices/CountablyAlgebraicu2ecompact_finite_support.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedLattices/CountablyAlgebraicu2ecom
finite_support.lean
DataTypesAsLattices/FixedLattices.lean
Lean source: DomainTheory/DataTypesAsLattices/FixedLattices.lean
DataTypesAsLattices/Retracts/Fixpoints.lean
Lean source: DomainTheory/DataTypesAsLattices/Retracts/Fixpoints.lean
DataTypesAsLattices/Retracts/Icomb.lean
Lean source: DomainTheory/DataTypesAsLattices/Retracts/Icomb.lean
DataTypesAsLattices/Retracts/Icomb_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Retracts/Icomb_app.lean
DataTypesAsLattices/Retracts/Icomb_isRetract.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/Icomb_isRetract.lean

DataTypesAsLattices/Retracts/DirectedSubset.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/DirectedSubset.lean

DataTypesAsLattices/Retracts/IsCompactSubset.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/IsCompactSubset.lean

DataTypesAsLattices/Retracts/boolR_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/boolR_app.lean

DataTypesAsLattices/Retracts/comp.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/comp.lean

DataTypesAsLattices/Retracts/Retract.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/Retract.lean

DataTypesAsLattices/Retracts/arrowR.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/arrowR.lean

DataTypesAsLattices/Retracts/comp_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/comp_app.lean

DataTypesAsLattices/Retracts/comp_isScottContinuous_right.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/comp_isScottContinuous_right.lean

DataTypesAsLattices/Retracts/comp_right_const.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/comp_right_const.lean

DataTypesAsLattices/Retracts/arrowR_map_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/arrowR_map_isScottContinuous.

DataTypesAsLattices/Retracts/arrowR_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/arrowR_app.lean

DataTypesAsLattices/Retracts/arrowR_isStrict.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/arrowR_isStrict.lean

DataTypesAsLattices/Retracts/dcondSet_bool_idem.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/dcondSet_bool_idem.lean

DataTypesAsLattices/Retracts/dcondSet_same_ofNat.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/dcondSet_same_ofNat.lean

DataTypesAsLattices/Retracts/directed_finite_cover.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/directed_finite_cover.lean

DataTypesAsLattices/Retracts/directed_sUnion_fixed.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/directed_sUnion_fixed.lean

DataTypesAsLattices/Retracts/eq_4_11.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/eq_4_11.lean

DataTypesAsLattices/Retracts/fstC.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/fstC.lean

DataTypesAsLattices/Retracts/fstC_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/fstC_app.lean

DataTypesAsLattices/Retracts/funOf_fix_idem.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/funOf_fix_idem.lean

DataTypesAsLattices/Retracts/funRetract.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/funRetract.lean

DataTypesAsLattices/Retracts/funRetract_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/funRetract_app.lean

DataTypesAsLattices/Retracts/gfpBelow.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/gfpBelow.lean

DataTypesAsLattices/Retracts/gfpBelow_isGLB.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/gfpBelow_isGLB.lean

DataTypesAsLattices/Retracts/gfpBelow_le.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/gfpBelow_le.lean

DataTypesAsLattices/Retracts/gfpBelow_postfixed.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/gfpBelow_postfixed.lean

DataTypesAsLattices/Retracts/gfpBelow_fixed_inter.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/gfpBelow_fixed_inter.lean

DataTypesAsLattices/Retracts/gfpBelow_subset.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/gfpBelow_subset.lean

DataTypesAsLattices/Retracts/graph_ext.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/graph_ext.lean

DataTypesAsLattices/Retracts/boolR_isRetract.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/boolR_isRetract.lean

DataTypesAsLattices/Retracts/eq_4_11_comp.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/eq_4_11_comp.lean

DataTypesAsLattices/Retracts/arrowR_retractLe.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/arrowR_retractLe.lean

DataTypesAsLattices/Retracts/funRetract_isRetract.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/funRetract_isRetract.lean

DataTypesAsLattices/Retracts/intF_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/intF_isScottContinuous.lean

DataTypesAsLattices/Retracts/intF_map_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/intF_map_isScottContinuous.le

DataTypesAsLattices/Retracts/intF_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/intF_app.lean

DataTypesAsLattices/Retracts/intR_eq_intF.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/intR_eq_intF.lean

DataTypesAsLattices/Retracts/intR_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/intR_app.lean

DataTypesAsLattices/Retracts/intR_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/intR_bot.lean

DataTypesAsLattices/Retracts/intR_isGraph.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/intR_isGraph.lean

DataTypesAsLattices/Retracts/intR_ofNat.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/intR_ofNat.lean

DataTypesAsLattices/Retracts/inter_const_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/inter_const_isScottContinuous

DataTypesAsLattices/Retracts/iterateFrom.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/iterateFrom.lean

DataTypesAsLattices/Retracts/iterateFrom_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/iterateFrom_bot.lean

DataTypesAsLattices/Retracts/iterateFrom_mono.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/iterateFrom_mono.lean

DataTypesAsLattices/Retracts/lfpAbove.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/lfpAbove.lean

DataTypesAsLattices/Retracts/lfpAbove_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/lfpAbove_bot.lean

DataTypesAsLattices/Retracts/lfpAbove_fixed.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/lfpAbove_fixed.lean

DataTypesAsLattices/Retracts/lfpAbove_le_of_ub.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/lfpAbove_le_of_ub.lean

DataTypesAsLattices/Retracts/lfpAbove_ub.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/lfpAbove_ub.lean

DataTypesAsLattices/Retracts/pairSeq.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/pairSeq.lean

DataTypesAsLattices/Retracts/plusR.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/plusR.lean

DataTypesAsLattices/Retracts/predSet_eq_ofNat_of_no_zero.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/predSet_eq_ofNat_of_no_zero.lean

DataTypesAsLattices/Retracts/intR_top_of_nonsingleton.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/intR_top_of_nonsingleton.lean

DataTypesAsLattices/Retracts/intR_top.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/intR_top.lean

DataTypesAsLattices/Retracts/intR_idem.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/intR_idem.lean

DataTypesAsLattices/Retracts/intR_isRetract.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/intR_isRetract.lean

DataTypesAsLattices/Retracts/predSet_ofNat_zero.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/predSet_ofNat_zero.lean

DataTypesAsLattices/Retracts/retractBasis_directed.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/retractBasis_directed.lean

DataTypesAsLattices/Retracts/retractBasis_directedSubset.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/retractBasis_directedSubset.lean

DataTypesAsLattices/Retracts/retractLe.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/retractLe.lean

DataTypesAsLattices/Retracts/retractLe_refl.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/retractLe_refl.lean

DataTypesAsLattices/Retracts/retractLe_trans.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/retractLe_trans.lean

DataTypesAsLattices/Retracts/retract_interpolation.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/retract_interpolation.lean

DataTypesAsLattices/Retracts/retract_isGraph.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/retract_isGraph.lean

DataTypesAsLattices/Retracts/iUnion_retract_isGraph.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/iUnion_retract_isGraph.lean

DataTypesAsLattices/Retracts/sSup_fixed_eq_sUnion.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/sSup_fixed_eq_sUnion.lean

DataTypesAsLattices/Retracts/retractBasis_sSup.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/retractBasis_sSup.lean

DataTypesAsLattices/Retracts/retractBasis_sUnion.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/retractBasis_sUnion.lean

DataTypesAsLattices/Retracts/retractBasis_wayBelow.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/retractBasis_wayBelow.lean

DataTypesAsLattices/Retracts/sUnion_Fixpoints_le_image.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/sUnion_Fixpoints_le_image.lean

DataTypesAsLattices/Retracts/lfpAbove_mem.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/lfpAbove_mem.lean

DataTypesAsLattices/Retracts/sndC.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/sndC.lean

DataTypesAsLattices/Retracts/sndC_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/sndC_app.lean

DataTypesAsLattices/Retracts/tensorR.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/tensorR.lean

DataTypesAsLattices/Retracts/typed.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/typed.lean

DataTypesAsLattices/Retracts/typed_of_arrowR.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/typed_of_arrowR.lean

DataTypesAsLattices/Retracts/arrowR_functor.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/arrowR_functor.lean

DataTypesAsLattices/Retracts/typed_arrowR_range.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/typed_arrowR_range.lean

DataTypesAsLattices/Retracts/typed_arrowR_restrict.lean

Lean source: DomainTheory/DataTypesAsLattices/Retracts/typed_arrowR_restrict.lean

DataTypesAsLattices/Retracts/typed_comp.lean
Lean source: `DomainTheory/DataTypesAsLattices/Retracts/typed_comp.lean`
DataTypesAsLattices/Retracts/vals.lean
Lean source: `DomainTheory/DataTypesAsLattices/Retracts/vals.lean`
DataTypesAsLattices/Retracts/vals_subset.lean
Lean source: `DomainTheory/DataTypesAsLattices/Retracts/vals_subset.lean`

2.38.4 AI: AI-Lean to AI-English

2.38.5 AI: AI-English to Human-English Concordance

2.39 Closure operations and algebraic lattices

2.39.1 Historical note

Algebraic lattices and closure operations predate the paper: Grätzer (1968) for the lattices, Tarski (1930) for the closures. Per Martin-Löf and Peter Hancock suggested that the continuous closures form a universe, and the construction of $\mathbf{V}$ is essentially theirs. The limit theorem is Scott's.

Dependencies. Inside Closures, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.




Figure 11: Historical note.

2.39.2 Human-English

Given any family of (finitary) operations on a set (say, ω) there is a closure operation defined on the subsets of that set obtained by forming the *least subset* including the given elements and *closed* under the operations. Examples are very familiar from algebra: the subgroup generated by a set of elements, the subspace spanned by a set of vectors, the convex hull of a set of geometric points. We simplify matters here by restricting attention to closures operating on sets in $\mathbf{P}\omega$, but the idea is quite general. The main point about these "algebraic" closure operations—as distinguished from topological closure operations—is that they are *continuous*. Thus, in the case of subgroups, if an element belongs to the subgroup generated by some elements, then it also belongs to the subgroup generated by *finitely* many of them. In the context of $\mathbf{P}\omega$ we can state the characteristic condition very simply.

- Definition (closure)
- Theorem 5.1
- Theorem 5.2
- Theorem 5.3
- Theorem 5.4

- Theorem 5.5
- Theorem 5.6

2.39.3 AI: Human-English to AI-Lean

DataTypesAsLattices/Closures/Icomb_isClosure.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/Icomb_isClosure.lean
DataTypesAsLattices/Closures/Icomb_subset_graph.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/Icomb_subset_graph.lean
DataTypesAsLattices/Closures/Icomb_subset_intR.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/Icomb_subset_intR.lean
DataTypesAsLattices/Closures/Closure.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/Closure.lean
DataTypesAsLattices/Closures/Isolated.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/Isolated.lean
DataTypesAsLattices/Closures/Vapply.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/Vapply.lean
DataTypesAsLattices/Closures/Vcomb.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/Vcomb.lean
DataTypesAsLattices/Closures/Vstep.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/Vstep.lean
DataTypesAsLattices/Closures/VapplyY.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/VapplyY.lean
DataTypesAsLattices/Closures/arrowR_diag_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/arrowR_diag_isScottContinuous
DataTypesAsLattices/Closures/boool.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/boool.lean
DataTypesAsLattices/Closures/boool_expansive.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/boool_expansive.lean
DataTypesAsLattices/Closures/Icomb_subset_boool.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/Icomb_subset_boool.lean
DataTypesAsLattices/Closures/boool_idem.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/boool_idem.lean
DataTypesAsLattices/Closures/boool_map_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/boool_map_isScottContinuous.l
DataTypesAsLattices/Closures/boool_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/boool_app.lean
DataTypesAsLattices/Closures/boool_isRetract.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/boool_isRetract.lean
DataTypesAsLattices/Closures/boool_isClosure.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/boool_isClosure.lean
DataTypesAsLattices/Closures/botElem_union.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/botElem_union.lean

DataTypesAsLattices/Closures/boxShift.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxShift.lean

DataTypesAsLattices/Closures/boxTag.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxTag.lean

DataTypesAsLattices/Closures/boxTag_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxTag_bot.lean

DataTypesAsLattices/Closures/boxTag_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxTag_isScottContinuous.lean

DataTypesAsLattices/Closures/boxTag_of_mem.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxTag_of_mem.lean

DataTypesAsLattices/Closures/closureCompact.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/closureCompact.lean

DataTypesAsLattices/Closures/closure_expansive.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/closure_expansive.lean

DataTypesAsLattices/Closures/closureCompact_isCompact.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/closureCompact_isCompact.lean

DataTypesAsLattices/Closures/compactFixedBelow.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/compactFixedBelow.lean

DataTypesAsLattices/Closures/compactFixedBelow_directedSubset.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/compactFixedBelow_directedSubset.lean

DataTypesAsLattices/Closures/compactFixedBelow_sUnion.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/compactFixedBelow_sUnion.lean

DataTypesAsLattices/Closures/compact_fixed_iff.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/compact_fixed_iff.lean

DataTypesAsLattices/Closures/directed_finite_cover_subset.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/directed_finite_cover_subset.lean

DataTypesAsLattices/Closures/closureCompact_isCompactSubset.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/closureCompact_isCompactSubset.lean

DataTypesAsLattices/Closures/compact_fixed_iff_subset.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/compact_fixed_iff_subset.lean

DataTypesAsLattices/Closures/eq_5_1.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_1.lean

DataTypesAsLattices/Closures/Icomb_subset_funRetract.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/Icomb_subset_funRetract.lean

DataTypesAsLattices/Closures/eq_5_10.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_10.lean

DataTypesAsLattices/Closures/eq_5_11.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_11.lean
DataTypesAsLattices/Closures/Icomb_subset_arrowR.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/Icomb_subset_arrowR.lean
DataTypesAsLattices/Closures/eq_5_12.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_12.lean
DataTypesAsLattices/Closures/eq_5_13.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_13.lean
DataTypesAsLattices/Closures/eq_5_16.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_16.lean
DataTypesAsLattices/Closures/Vapply_eq_imp_expansive.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/Vapply_eq_imp_expansive.lean
DataTypesAsLattices/Closures/Vapply_prefixpoint.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/Vapply_prefixpoint.lean
DataTypesAsLattices/Closures/Vapply_closed.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/Vapply_closed.lean
DataTypesAsLattices/Closures/Vapply_eq_Vstep.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/Vapply_eq_Vstep.lean
DataTypesAsLattices/Closures/eq_5_17.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_17.lean
DataTypesAsLattices/Closures/Vapply_eq_imp_idem.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/Vapply_eq_imp_idem.lean
DataTypesAsLattices/Closures/eq_5_18.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_18.lean
DataTypesAsLattices/Closures/eq_5_18_rev.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_18_rev.lean
DataTypesAsLattices/Closures/eq_5_18_eq.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_18_eq.lean
DataTypesAsLattices/Closures/eq_5_2.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_2.lean
DataTypesAsLattices/Closures/eq_5_8.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_8.lean
DataTypesAsLattices/Closures/eq_5_9.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_9.lean
DataTypesAsLattices/Closures/exists_mem_of_ne_bot.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/exists_mem_of_ne_bot.lean
DataTypesAsLattices/Closures/funRetract_isClosure.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/funRetract_isClosure.lean
DataTypesAsLattices/Closures/intR_isClosure.lean
Lean source: DomainTheory/DataTypesAsLattices/Closures/intR_isClosure.lean
DataTypesAsLattices/Closures/openR_map_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/openR_map_isScottContinuous.l

DataTypesAsLattices/Closures/openR_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/openR_app.lean

DataTypesAsLattices/Closures/openR_expansive.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/openR_expansive.lean

DataTypesAsLattices/Closures/Icomb_subset_openR.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/Icomb_subset_openR.lean

DataTypesAsLattices/Closures/openR_idem.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/openR_idem.lean

DataTypesAsLattices/Closures/openR_isRetract.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/openR_isRetract.lean

DataTypesAsLattices/Closures/openR_isClosure.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/openR_isClosure.lean

DataTypesAsLattices/Closures/predSet_succSet.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/predSet_succSet.lean

DataTypesAsLattices/Closures/predSet_union.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/predSet_union.lean

DataTypesAsLattices/Closures/representClosure.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/representClosure.lean

DataTypesAsLattices/Closures/representClosureCode.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/representClosureCode.lean

DataTypesAsLattices/Closures/representClosure_expansive.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/representClosure_expansive.lean

DataTypesAsLattices/Closures/representClosure_idem.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/representClosure_idem.lean

DataTypesAsLattices/Closures/representClosureCode_isClosure.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/representClosureCode_isClosure.lean

DataTypesAsLattices/Closures/representClosure_mono.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/representClosure_mono.lean

DataTypesAsLattices/Closures/representClosure_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/representClosure_isScottContinuous.lean

DataTypesAsLattices/Closures/representClosureCode_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/representClosureCode_app.lean

DataTypesAsLattices/Closures/representationDecode.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/representationDecode.lean

DataTypesAsLattices/Closures/representationEncode.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/representationEncode.lean

DataTypesAsLattices/Closures/representationDecode_encode.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/representationDecode_encode.lean

DataTypesAsLattices/Closures/representationEncode_fixed.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/representationEncode_fixed.lean

DataTypesAsLattices/Closures/representationOrderIso.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/representationOrderIso.lean

DataTypesAsLattices/Closures/retractBasis_eq_compactFixedBelow.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/retractBasis_eq_compactFixedBelow.lean

DataTypesAsLattices/Closures/fixed_eq_sSup_compacts.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/fixed_eq_sSup_compacts.lean

DataTypesAsLattices/Closures/closureRangeCountablyAlgebraic.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/closureRangeCountablyAlgebrai

DataTypesAsLattices/Closures/selfArrowStep.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/selfArrowStep.lean

DataTypesAsLattices/Closures/dEq.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/dEq.lean

DataTypesAsLattices/Closures/selfArrowStep_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/selfArrowStep_isScottContinuous.lean

DataTypesAsLattices/Closures/eq_5_25.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_25.lean

DataTypesAsLattices/Closures/eq_5_25_arrow.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_25_arrow.lean

DataTypesAsLattices/Closures/squareFst.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/squareFst.lean

DataTypesAsLattices/Closures/squareFst_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/squareFst_bot.lean

DataTypesAsLattices/Closures/squareFst_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/squareFst_isScottContinuous.l

DataTypesAsLattices/Closures/squareFst_top.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/squareFst_top.lean

DataTypesAsLattices/Closures/squarePair.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/squarePair.lean

DataTypesAsLattices/Closures/squarePair_bot_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/squarePair_bot_bot.lean

DataTypesAsLattices/Closures/squarePair_inj.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/squarePair_inj.lean

DataTypesAsLattices/Closures/squarePair_isScottContinuous_left.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/squarePair_isScottContinuous_left.lean

DataTypesAsLattices/Closures/squarePair_isScottContinuous_right.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/squarePair_isScottContinuous_right.lean

DataTypesAsLattices/Closures/squarePair_mono.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/squarePair_mono.lean

DataTypesAsLattices/Closures/Icomb_subset_boxTensor.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/Icomb_subset_boxTensor.lean

DataTypesAsLattices/Closures/squareSnd.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/squareSnd.lean

DataTypesAsLattices/Closures/boxPlus.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus.lean

DataTypesAsLattices/Closures/boxTensor.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxTensor.lean

DataTypesAsLattices/Closures/squareSnd_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/squareSnd_bot.lean

DataTypesAsLattices/Closures/squareSnd_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/squareSnd_isScottContinuous.l

DataTypesAsLattices/Closures/boxTensor_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxTensor_app.lean

DataTypesAsLattices/Closures/boxTensor_isRetract.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxTensor_isRetract.lean

DataTypesAsLattices/Closures/squareSnd_top.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/squareSnd_top.lean

DataTypesAsLattices/Closures/topElem_ne_botElem.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/topElem_ne_botElem.lean

DataTypesAsLattices/Closures/typed_of_boxTensor.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/typed_of_boxTensor.lean

DataTypesAsLattices/Closures/typed_squarePair_boxTensor.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/typed_squarePair_boxTensor.lean

DataTypesAsLattices/Closures/union_botElem.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/union_botElem.lean

DataTypesAsLattices/Closures/union_left_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/union_left_isScottContinuous.

DataTypesAsLattices/Closures/union_const_left_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/union_const_left_isScottContinuous.lean

DataTypesAsLattices/Closures/boxPlus_test_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_test_isScottContinuous.lean

DataTypesAsLattices/Closures/boxPlus_map_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_map_isScottContinuous

DataTypesAsLattices/Closures/boxPlus_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_app.lean

DataTypesAsLattices/Closures/boxPlus_app_empty.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_app_empty.lean

DataTypesAsLattices/Closures/boxPlus_app_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_app_bot.lean

DataTypesAsLattices/Closures/boxPlus_app_left.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_app_left.lean

DataTypesAsLattices/Closures/boxPlus_app_mixed.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_app_mixed.lean

DataTypesAsLattices/Closures/boxPlus_app_right.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_app_right.lean

DataTypesAsLattices/Closures/boxPlus_app_top.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_app_top.lean

DataTypesAsLattices/Closures/boxPlus_typed_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_typed_bot.lean

DataTypesAsLattices/Closures/boxPlus_typed_top.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_typed_top.lean

DataTypesAsLattices/Closures/boxShift_map_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxShift_map_isScottContinuous.lean

DataTypesAsLattices/Closures/boxShift_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxShift_app.lean

DataTypesAsLattices/Closures/boxShift_expansive.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxShift_expansive.lean

DataTypesAsLattices/Closures/Icomb_subset_boxShift.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/Icomb_subset_boxShift.lean

DataTypesAsLattices/Closures/boxPlus_expansive.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_expansive.lean

DataTypesAsLattices/Closures/Icomb_subset_boxPlus.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/Icomb_subset_boxPlus.lean

DataTypesAsLattices/Closures/boxShift_isRetract.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxShift_isRetract.lean

DataTypesAsLattices/Closures/boxShift_isClosure.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxShift_isClosure.lean

DataTypesAsLattices/Closures/union_right_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/union_right_isScottContinuous

DataTypesAsLattices/Closures/Vstep_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/Vstep_isScottContinuous.lean

DataTypesAsLattices/Closures/eq_5_14.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_14.lean

DataTypesAsLattices/Closures/Vapply_left_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/Vapply_left_isScottContinuous

DataTypesAsLattices/Closures/Vapply_right_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/Vapply_right_isScottContinuous.lean

DataTypesAsLattices/Closures/Vapply_graph_isClosure.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/Vapply_graph_isClosure.lean

DataTypesAsLattices/Closures/Vcomb_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/Vcomb_app.lean

DataTypesAsLattices/Closures/eq_5_21.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/eq_5_21.lean

DataTypesAsLattices/Closures/Icomb_subset_Vcomb.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/Icomb_subset_Vcomb.lean

DataTypesAsLattices/Closures/typed_of_retract_Vcomb.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/typed_of_retract_Vcomb.lean

DataTypesAsLattices/Closures/zero_mem_boxShift_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/zero_mem_boxShift_app.lean

DataTypesAsLattices/Closures/boxShift_app_ne_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxShift_app_ne_bot.lean

DataTypesAsLattices/Closures/boxPlus_app_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_app_app.lean

DataTypesAsLattices/Closures/boxPlus_isRetract.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_isRetract.lean

DataTypesAsLattices/Closures/boxPlus_typed_inl.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_typed_inl.lean

DataTypesAsLattices/Closures/boxPlus_typed_inr.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_typed_inr.lean

DataTypesAsLattices/Closures/boxPlus_typed_iff.lean

Lean source: DomainTheory/DataTypesAsLattices/Closures/boxPlus_typed_iff.lean

2.39.4 AI: AI-Lean to AI-English

2.39.5 AI: AI-English to Human-English Concordance

2.40 Subsets and their classification

2.40.1 Historical note

The classification of these subsets by notions from descriptive set theory, and the connection with Wadge reducibility, are in the work of Adrian Tang. The normal forms for the classes, such as Table 3, are Scott's.

Dependencies. Inside Classification, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

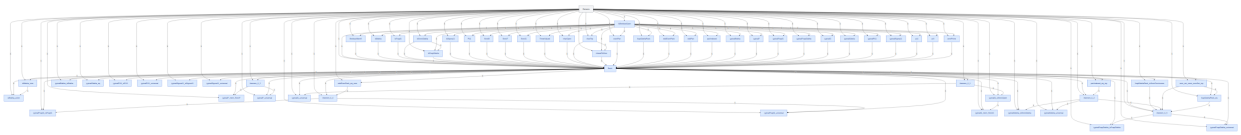


Figure 12: Historical note.

2.40.2 Human-English

Retracts produce very special subsets of $\mathbf{P}\omega$: a retract always has a nonempty range which forms a lattice under $\sqsubseteq$. For example, the range of **int** is $\{\bot, \top\} \cup \omega$. We often wish to eliminate $\bot$ and $\top$; and with a retract like **tree** the situation is more complex, since combinations like $\langle 1, \langle\langle 1, \langle \bot, \langle 0\rangle\rangle\rangle, \top\rangle\rangle$ might require elimination. In these two cases the method is simple.

Consider these two functions:

$$\mathbf{mid} = \lambda x : \mathbf{int}.\, x \supset 0, 0 \tag{6.1}$$

$$\mathbf{perf} = \lambda u : \mathbf{tree}.\, \mathbf{which}(u) \supset 0,\, \Delta(\mathbf{perf}(\mathbf{fst}(\mathbf{out}(u))))(\mathbf{perf}(\mathbf{snd}(\mathbf{out}(u)))) \tag{6.2}$$

where Δ is a special combinator:

$$\Delta = \lambda x \lambda y.\, (x \supset (y \supset 0, \top), \top) \cup (y \supset (x \supset 0, \top), \top). \tag{6.3}$$

We find that $\omega = \{x : \mathbf{int} \mid \mathbf{mid}(x) = 0\}$. In the case of trees, note first this behavior of Δ:

Δ	$\bot$	0	$\top$
$\bot$	$\bot$	$\bot$	$\top$
0	$\bot$	0	$\top$
$\top$	$\top$	$\top$	$\top$

The question is: what subset is $\{u : \mathbf{tree} \mid \mathbf{perf}(u) = 0\}$?

Now **perf** is defined recursively. We can see that

$$\mathbf{perf}(\bot) = \bot, \quad \mathbf{perf}(\top) = \top, \quad \mathbf{perf}(\langle 0\rangle) = 0,$$

and

$$\mathbf{perf}(\langle 1, \langle x, y\rangle\rangle) = \Delta(\mathbf{perf}(x))(\mathbf{perf}(y))$$

when $x, y : \mathbf{tree}$. Every tree, aside from $\top$ or $\bot$, is either *atomic* or a pair of trees. The atomic tree is "perfect" (that is, $\mathbf{perf}(\langle 0\rangle) = 0$). A finite tree which does not contain $\bot$ or $\top$ is perfect—as we can see inductively using the table above for Δ. An infinite tree is never perfect: either some branch ends in $\top$ and

perf maps it to $\top$, or $\top$ is never reached and **perf** maps it to $\bot$. Thus the subset in question is then seen to be the set of *finite* trees generated from the atom by pairing. This is clearly a desirable subset, and it is sorted out by a function with a simple recursive definition. The general question is: what subsets can be characterized by equations? The answer can be given by reference to the topology of $\mathbf{P}\omega$.

- Definition (classes)
- Theorem 6.1
- Theorem 6.2
- Theorem 6.3
- Theorem 6.4
- Theorem 6.5
- Theorem 6.6
- Theorem 6.7

2.40.3 AI: Human-English to AI-Lean

DataTypesAsLattices/Classification/IsBooleanOpen.lean
Lean source: `DomainTheory/DataTypesAsLattices/Classification/IsBooleanOpen.lean`
DataTypesAsLattices/Classification/BooleanMemE.lean
Lean source: `DomainTheory/DataTypesAsLattices/Classification/BooleanMemE.lean`
DataTypesAsLattices/Classification/IsBdelta.lean
Lean source: `DomainTheory/DataTypesAsLattices/Classification/IsBdelta.lean`
DataTypesAsLattices/Classification/IsFcapG.lean
Lean source: `DomainTheory/DataTypesAsLattices/Classification/IsFcapG.lean`
DataTypesAsLattices/Classification/Pi11.lean
Lean source: `DomainTheory/DataTypesAsLattices/Classification/Pi11.lean`
DataTypesAsLattices/Classification/IsScottGdelta.lean
Lean source: `DomainTheory/DataTypesAsLattices/Classification/IsScottGdelta.lean`
DataTypesAsLattices/Classification/IsFcapGdelta.lean
Lean source: `DomainTheory/DataTypesAsLattices/Classification/IsFcapGdelta.lean`
DataTypesAsLattices/Classification/IsSigma11.lean
Lean source: `DomainTheory/DataTypesAsLattices/Classification/IsSigma11.lean`
DataTypesAsLattices/Classification/ThreeValued.lean
Lean source: `DomainTheory/DataTypesAsLattices/Classification/ThreeValued.lean`
DataTypesAsLattices/Classification/ScottB.lean
Lean source: `DomainTheory/DataTypesAsLattices/Classification/ScottB.lean`
DataTypesAsLattices/Classification/ScottF.lean
Lean source: `DomainTheory/DataTypesAsLattices/Classification/ScottF.lean`
DataTypesAsLattices/Classification/ScottG.lean
Lean source: `DomainTheory/DataTypesAsLattices/Classification/ScottG.lean`
DataTypesAsLattices/Classification/charOpen.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/charOpen.lean

DataTypesAsLattices/Classification/charTop.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/charTop.lean

DataTypesAsLattices/Classification/closedToZero.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/closedToZero.lean

DataTypesAsLattices/Classification/evenPart.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/evenPart.lean

DataTypesAsLattices/Classification/fcapGdeltaPack.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/fcapGdeltaPack.lean

DataTypesAsLattices/Classification/oddEvenPack.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/oddEvenPack.lean

DataTypesAsLattices/Classification/oddPart.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/oddPart.lean

DataTypesAsLattices/Classification/pairIndexed.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/pairIndexed.lean

DataTypesAsLattices/Classification/typicalBdelta.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/typicalBdelta.lean

DataTypesAsLattices/Classification/typicalF.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/typicalF.lean

DataTypesAsLattices/Classification/typicalFcapG.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/typicalFcapG.lean

DataTypesAsLattices/Classification/typicalFcapGdelta.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/typicalFcapGdelta.lean

DataTypesAsLattices/Classification/typicalG.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/typicalG.lean

DataTypesAsLattices/Classification/typicalGdelta.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/typicalGdelta.lean

DataTypesAsLattices/Classification/typicalPi11.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/typicalPi11.lean

DataTypesAsLattices/Classification/typicalSigma11.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/typicalSigma11.lean

DataTypesAsLattices/Classification/uvU.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/uvU.lean

DataTypesAsLattices/Classification/uvV.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/uvV.lean

DataTypesAsLattices/Classification/zeroPrime.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/zeroPrime.lean

DataTypesAsLattices/Classification/Basic.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/Basic.lean

DataTypesAsLattices/Classification/fcapGdeltaPack_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/fcapGdeltaPack_isScottContinuous.lean

DataTypesAsLattices/Classification/isBdelta_inter.lean

Lean source: DomainTheory/DataTypesAsLattices/Classification/isBdelta_inter.lean

DataTypesAsLattices/Classification/isBdelta_union.lean
Lean source: DomainTheory/DataTypesAsLattices/Classification/isBdelta_union.lean

DataTypesAsLattices/Classification/oddEvenPack_eq_zero.lean
Lean source: DomainTheory/DataTypesAsLattices/Classification/oddEvenPack_eq_zero.lean

DataTypesAsLattices/Classification/pairIndexed_eq_top.lean
Lean source: DomainTheory/DataTypesAsLattices/Classification/pairIndexed_eq_top.lean

DataTypesAsLattices/Classification/typicalBdelta_isBdelta.lean
Lean source: DomainTheory/DataTypesAsLattices/Classification/typicalBdelta_isBdelta.lean

DataTypesAsLattices/Classification/typicalGdelta_eq.lean
Lean source: DomainTheory/DataTypesAsLattices/Classification/typicalGdelta_eq.lean

DataTypesAsLattices/Classification/typicalPi11_isPi11.lean
Lean source: DomainTheory/DataTypesAsLattices/Classification/typicalPi11_isPi11.lean

DataTypesAsLattices/Classification/typicalPi11_universal.lean
Lean source: DomainTheory/DataTypesAsLattices/Classification/typicalPi11_universal.lean

DataTypesAsLattices/Classification/typicalSigma11_isSigma11.lean
Lean source: DomainTheory/DataTypesAsLattices/Classification/typicalSigma11_isSigma11.lean

DataTypesAsLattices/Classification/typicalSigma11_universal.lean
Lean source: DomainTheory/DataTypesAsLattices/Classification/typicalSigma11_universal.lean

DataTypesAsLattices/Classification/zero_not_mem_succSet_top.lean
Lean source: DomainTheory/DataTypesAsLattices/Classification/zero_not_mem_succSet_top.lean

DataTypesAsLattices/Classification/fcapGdeltaPack_eq.lean
Lean source: DomainTheory/DataTypesAsLattices/Classification/fcapGdeltaPack_eq.lean

2.40.4 AI: AI-Lean to AI-English

2.40.5 AI: AI-English to Human-English Concordance

2.41 Total functions and functionality

2.41.1 Historical note

Functionality had long been studied in combinatory logic. Hindley, Lercher, and Seldin (1972) is the introduction Scott used. This section is his reading of that theory in $\mathbf{P}\omega$. The connection with the functional interpretation of intuitionistic logic goes back to Curry and Kleene, and Theorem 7.3 is the standard result of that interpretation. Theorem 7.4, that the obvious typing characterizes the iterators, is due to Gordon Plotkin.

Dependencies. Inside Functionality, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.



Figure 13: Historical note.

2.41.2 Human-English

There is an inevitable conflict between the concepts of *total* and *partial* functions: we desire the former, but it is the latter we usually get. Total functions are better because they are "well-defined" at all their arguments, but the rub is that there is no general way of deciding when a *definition* is going to be well-defined in all its uses. In analysis we have singularities, and in recursion theory we have endless, nonfinishing computations. In the present theory we have in effect evaded the question in two ways. First we have embraced the partial function as the norm. But secondly, and possibly confusingly, the multiple-valued functions are normal, total functions from $\mathbf{P}\omega$ into $\mathbf{P}\omega$. The point, of course, is that we are making a *model* of the partial functions in terms of ordinary mathematical functions. But note that the success of the *model* lies in *not* using arbitrary functions: it is only the continuous functions that correspond to the kind of partial functions we wanted to study. It would be a mistake to think of the variables in λ-calculus as ranging over arbitrary functions—and this mistake was made by both Church and Curry. The fixed-point operator $\mathbf{Y}$ shows that we must restrict attention to functions which do have fixed points. It is certainly the case that $\mathbf{P}\omega$ is not the only model for the λ-calculus, but it is a very satisfactory model and is rich enough to illustrate what can and what cannot be done with partial functions.

Whatever the pleasures of partial functions (and the multiple-valued ones, too), the desire for total functions remains. Take the integers. We are more interested in ω than $\omega \cup \{\bot, \top\}$. Since the multiple values $\bot$ and $\top$ are but two in number, it is easy to avoid them. The problem becomes tiresome in considering functions, however. The lattice represented by the retract $\mathbf{int} \circ \!\!\to \mathbf{int}$ is much too large, in that there are as many nontotal functions in this domain as total ones. The aim of the present section is to introduce an interpretation of a theory of functionality in the model $\mathbf{P}\omega$ that provides a convenient way of restricting attention to the functions (or other objects) that are total in the desired sense. The theory of functionality is rather like proposals of Curry, but not quite the same for important reasons as we will see.

In the theory of retracts of §§ 5 and 6, the plan of "restricting attention" was the very simple one of restricting to a *subset*. It was made notationally simple as the subsets in question could be parameterized by continuous functions. The retraction mappings stand in for their ranges. Even better, certain continuous functions act on these retractions as space-forming functors (such as $\oplus$ and $\circ \!\!\to$), which gives greater notational simplicity because one language is able to serve for several tasks. When we pass to the theory of total functions, this same kind of simplicity is no longer possible owing to an increase in quantifier complexity in the necessary definitions. (This remark is made definite below.) Another point where there is some loss of simplicity concerns the representation of entities in $\mathbf{P}\omega$: subsets will no longer be enough, since we will need *quotients* of subsets. This is not a very startling point. Many constructions are affected in a natural way via equivalence classes. An equivalence relation makes you blind to certain distinctions. It may be easier also to remain a bit blind than to search for the most beautiful representative of an equivalence class: there may be nothing to choose between several candidates, and it can cost too much effort to attempt

a choice. Thus our first agreement is that for many purposes a *kind* of object can be taken as a set of equivalence classes for an equivalence relation on a subset of $\mathbf{P}\omega$.

Because $\mathbf{P}\omega$ is closed under the pairing function $\lambda x \lambda y.\, \langle x, y \rangle$, we shall construe relations on subsets of $\mathbf{P}\omega$ as subsets of $\mathbf{P}\omega$ all of whose elements are ordered pairs. That is, a relation A satisfies this inclusion:

$$A \subseteq \{\langle x, y \rangle \mid x, y \in \mathbf{P}\omega\}. \tag{7.1}$$

- Definition (equivalence)
- Theorem 7.1
- Theorem 7.2
- Theorem 7.3
- Theorem 7.4

2.41.3 AI: Human-English to AI-Lean

DataTypesAsLattices/Functionality/Hcomb_app.lean
Lean source: `DomainTheory/DataTypesAsLattices/Functionality/Hcomb_app.lean`
DataTypesAsLattices/Functionality/Icomb_isGraph.lean
Lean source: `DomainTheory/DataTypesAsLattices/Functionality/Icomb_isGraph.lean`
DataTypesAsLattices/Functionality/Kcomb_app.lean
Lean source: `DomainTheory/DataTypesAsLattices/Functionality/Kcomb_app.lean`
DataTypesAsLattices/Functionality/Kcomb_app2.lean
Lean source: `DomainTheory/DataTypesAsLattices/Functionality/Kcomb_app2.lean`
DataTypesAsLattices/Functionality/Kcomb_app_isGraph.lean
Lean source: `DomainTheory/DataTypesAsLattices/Functionality/Kcomb_app_isGraph.lean`
DataTypesAsLattices/Functionality/Kcomb_isGraph.lean
Lean source: `DomainTheory/DataTypesAsLattices/Functionality/Kcomb_isGraph.lean`
DataTypesAsLattices/Functionality/RestrictedEquiv.lean
Lean source: `DomainTheory/DataTypesAsLattices/Functionality/RestrictedEquiv.lean`
DataTypesAsLattices/Functionality/LambTerm.lean
Lean source: `DomainTheory/DataTypesAsLattices/Functionality/LambTerm.lean`
DataTypesAsLattices/Functionality/Ea.lean
Lean source: `DomainTheory/DataTypesAsLattices/Functionality/Ea.lean`
DataTypesAsLattices/Functionality/Nk.lean
Lean source: `DomainTheory/DataTypesAsLattices/Functionality/Nk.lean`
DataTypesAsLattices/Functionality/Nrel.lean
Lean source: `DomainTheory/DataTypesAsLattices/Functionality/Nrel.lean`
DataTypesAsLattices/Functionality/Scomb_map_isScottContinuous.lean
Lean source: `DomainTheory/DataTypesAsLattices/Functionality/Scomb_map_isScottContinuous.lean`
DataTypesAsLattices/Functionality/Scomb_app.lean
Lean source: `DomainTheory/DataTypesAsLattices/Functionality/Scomb_app.lean`

DataTypesAsLattices/Functionality/Scomb_isGraph.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Scomb_isGraph.lean
DataTypesAsLattices/Functionality/Scomb_mid_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Scomb_mid_isScottContinuous.lean
DataTypesAsLattices/Functionality/Scomb_app2.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Scomb_app2.lean
DataTypesAsLattices/Functionality/Scomb_app_isGraph.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Scomb_app_isGraph.lean
DataTypesAsLattices/Functionality/Z.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Z.lean
DataTypesAsLattices/Functionality/Z_finite_bound.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Z_finite_bound.lean
DataTypesAsLattices/Functionality/Z_finite_no_tag.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Z_finite_no_tag.lean
DataTypesAsLattices/Functionality/Z_graph_funOf.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Z_graph_funOf.lean
DataTypesAsLattices/Functionality/Z_isScottContinuous_right.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Z_isScottContinuous_right.lean
DataTypesAsLattices/Functionality/Z_rel.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Z_rel.lean
DataTypesAsLattices/Functionality/Zcomb.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Zcomb.lean
DataTypesAsLattices/Functionality/arrowE.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/arrowE.lean
DataTypesAsLattices/Functionality/comp_isGraph.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/comp_isGraph.lean
DataTypesAsLattices/Functionality/condSet_bot.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/condSet_bot.lean
DataTypesAsLattices/Functionality/condSet_ofNat_one.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/condSet_ofNat_one.lean
DataTypesAsLattices/Functionality/condSet_ofNat_succ.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/condSet_ofNat_succ.lean
DataTypesAsLattices/Functionality/condSet_ofNat_zero.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/condSet_ofNat_zero.lean
DataTypesAsLattices/Functionality/condSet_same_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/condSet_same_bot.lean

DataTypesAsLattices/Functionality/condSet_same_of_mem.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/condSet_same_of_mem.lean

DataTypesAsLattices/Functionality/continuous_on_diag.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/continuous_on_diag.lean

DataTypesAsLattices/Functionality/continuous_tuple.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/continuous_tuple.lean

DataTypesAsLattices/Functionality/Scomb_inner_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/Scomb_inner_isScottContinuous.lean

DataTypesAsLattices/Functionality/Scomb_app2_isGraph.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/Scomb_app2_isGraph.lean

DataTypesAsLattices/Functionality/Scomb_app3.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/Scomb_app3.lean

DataTypesAsLattices/Functionality/Z_isScottContinuous_left.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/Z_isScottContinuous_left.lean

DataTypesAsLattices/Functionality/Zcomb_map_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/Zcomb_map_isScottContinuous.lean

DataTypesAsLattices/Functionality/Zcomb_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/Zcomb_app.lean

DataTypesAsLattices/Functionality/Zcomb_app2.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/Zcomb_app2.lean

DataTypesAsLattices/Functionality/Zcomb_app_isGraph.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/Zcomb_app_isGraph.lean

DataTypesAsLattices/Functionality/Zcomb_isGraph.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/Zcomb_isGraph.lean

DataTypesAsLattices/Functionality/arrowR_diag_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/arrowR_diag_isScottContinuous.lean

DataTypesAsLattices/Functionality/continuous_nary.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/continuous_nary.lean

DataTypesAsLattices/Functionality/Hinterp_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hinterp_isScottContinuous.lean

DataTypesAsLattices/Functionality/Htyped_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/Htyped_app.lean

DataTypesAsLattices/Functionality/curryC_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/curryC_isScottContinuous
DataTypesAsLattices/Functionality/curryC_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/curryC_app.lean
DataTypesAsLattices/Functionality/emptyE.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/emptyE.lean
DataTypesAsLattices/Functionality/encodeExp.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/encodeExp.lean
DataTypesAsLattices/Functionality/envR_map_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/envR_map_isScottContinuous.lean
DataTypesAsLattices/Functionality/envR_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/envR_app.lean
DataTypesAsLattices/Functionality/eraseTag.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eraseTag.lean
DataTypesAsLattices/Functionality/eraseTag_Z_finite.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eraseTag_Z_finite.lean
DataTypesAsLattices/Functionality/eraseTag_Z_finite_union.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eraseTag_Z_finite_union.lean
DataTypesAsLattices/Functionality/eta2_map_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eta2_map_isScottContinuous.lean
DataTypesAsLattices/Functionality/eta2_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eta2_app.lean
DataTypesAsLattices/Functionality/evalC_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/evalC_isScottContinuous.
DataTypesAsLattices/Functionality/evalC_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/evalC_app.lean
DataTypesAsLattices/Functionality/expPayload.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/expPayload.lean
DataTypesAsLattices/Functionality/expTag.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/expTag.lean
DataTypesAsLattices/Functionality/funOf_condSet.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/funOf_condSet.lean
DataTypesAsLattices/Functionality/funOf_e_union_fresh.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/funOf_e_union_fresh.lean
DataTypesAsLattices/Functionality/funOf_top.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/funOf_top.lean
DataTypesAsLattices/Functionality/funOf_dcondSet.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/funOf_dcondSet.lean
DataTypesAsLattices/Functionality/graph_funOf_ext.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/graph_funOf_ext.lean

DataTypesAsLattices/Functionality/hApp_isScottContinuous_t.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hApp_isScottContinuous_t.lean

DataTypesAsLattices/Functionality/hApply.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hApply.lean

DataTypesAsLattices/Functionality/hApply_isScottContinuous_H.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hApply_isScottContinuous_H.lean

DataTypesAsLattices/Functionality/hApp_isScottContinuous_H.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hApp_isScottContinuous_H.lean

DataTypesAsLattices/Functionality/hApply_isScottContinuous_e.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hApply_isScottContinuous_e.lean

DataTypesAsLattices/Functionality/hApply_payload_isScottContinuous_e.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hApply_payload_isScottContinuous_e.lean

DataTypesAsLattices/Functionality/hApp_isScottContinuous_e.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hApp_isScottContinuous_e.lean

DataTypesAsLattices/Functionality/hCond_isScottContinuous_H.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hCond_isScottContinuous_H.lean

DataTypesAsLattices/Functionality/hCond_isScottContinuous_e.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hCond_isScottContinuous_e.lean

DataTypesAsLattices/Functionality/hCond_isScottContinuous_t.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hCond_isScottContinuous_t.lean

DataTypesAsLattices/Functionality/hLam_isScottContinuous_H.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hLam_isScottContinuous_H.lean

DataTypesAsLattices/Functionality/hPred_isScottContinuous_H.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hPred_isScottContinuous_H.lean

DataTypesAsLattices/Functionality/hPred_isScottContinuous_e.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hPred_isScottContinuous_e.lean

DataTypesAsLattices/Functionality/hPred_isScottContinuous_t.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hPred_isScottContinuous_t.lean

DataTypesAsLattices/Functionality/hSucc_isScottContinuous_H.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hSucc_isScottContinuous_H.lean

DataTypesAsLattices/Functionality/Hstep_isScottContinuous_H.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hstep_isScottContinuous_H.lean

DataTypesAsLattices/Functionality/HF_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/HF_isScottContinuous.lea

DataTypesAsLattices/Functionality/Hfun_fixed.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hfun_fixed.lean

DataTypesAsLattices/Functionality/hSucc_isScottContinuous_e.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hSucc_isScottContinuous_e.lean

DataTypesAsLattices/Functionality/hSucc_isScottContinuous_t.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hSucc_isScottContinuous_t.lean

DataTypesAsLattices/Functionality/hVar.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hVar.lean

DataTypesAsLattices/Functionality/hVar_isScottContinuous_e.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hVar_isScottContinuous_e.lean

DataTypesAsLattices/Functionality/hVar_isScottContinuous_t.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hVar_isScottContinuous_t.lean

DataTypesAsLattices/Functionality/inleftC.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/inleftC.lean

DataTypesAsLattices/Functionality/hZero.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/hZero.lean

DataTypesAsLattices/Functionality/inrightC.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/inrightC.lean

DataTypesAsLattices/Functionality/iterateE.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/iterateE.lean

DataTypesAsLattices/Functionality/kerE.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/kerE.lean

DataTypesAsLattices/Functionality/kerE_repr.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/kerE_repr.lean

DataTypesAsLattices/Functionality/mem.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/mem.lean

DataTypesAsLattices/Functionality/normalized_finite_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/normalized_finite_app.lean

DataTypesAsLattices/Functionality/normalized_finite_fresh_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/normalized_finite_fresh_app.lean

DataTypesAsLattices/Functionality/outC.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/outC.lean

DataTypesAsLattices/Functionality/outC_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/outC_app.lean
DataTypesAsLattices/Functionality/outleftC.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/outleftC.lean
DataTypesAsLattices/Functionality/outleftC_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/outleftC_isScottContinuous.lean
DataTypesAsLattices/Functionality/outleftC_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/outleftC_app.lean
DataTypesAsLattices/Functionality/outrightC.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/outrightC.lean
DataTypesAsLattices/Functionality/outrightC_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/outrightC_isScottContinuous.lean
DataTypesAsLattices/Functionality/outrightC_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/outrightC_app.lean
DataTypesAsLattices/Functionality/pairElem.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/pairElem.lean
DataTypesAsLattices/Functionality/pairElem_eq_pairSeq.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/pairElem_eq_pairSeq.lean
DataTypesAsLattices/Functionality/pairElem_fst.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/pairElem_fst.lean
DataTypesAsLattices/Functionality/pairElem_snd.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/pairElem_snd.lean
DataTypesAsLattices/Functionality/pairElem_tag_ne.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/pairElem_tag_ne.lean
DataTypesAsLattices/Functionality/pairMed.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/pairMed.lean
DataTypesAsLattices/Functionality/pairSeq_app_one.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/pairSeq_app_one.lean
DataTypesAsLattices/Functionality/pairSeq_app_zero.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/pairSeq_app_zero.lean
DataTypesAsLattices/Functionality/pairSeq_bot.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/pairSeq_bot.lean
DataTypesAsLattices/Functionality/pairSeq_inj.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/pairSeq_inj.lean

DataTypesAsLattices/Functionality/pairElem_inj.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/pairElem_inj.lean

DataTypesAsLattices/Functionality/pairSeq_isScottContinuous_left.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/pairSeq_isScottContinuous_left.lean

DataTypesAsLattices/Functionality/curry_mid_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/curry_mid_isScottContinuous.lean

DataTypesAsLattices/Functionality/curryC_app2.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/curryC_app2.lean

DataTypesAsLattices/Functionality/pairSeq_isScottContinuous_right.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/pairSeq_isScottContinuous_right.lean

DataTypesAsLattices/Functionality/curry_body_isScottContinuous_y.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/curry_body_isScottContinuous_y.lean

DataTypesAsLattices/Functionality/curryC_app3.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/curryC_app3.lean

DataTypesAsLattices/Functionality/diagC_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/diagC_app.lean

DataTypesAsLattices/Functionality/inleftC_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/inleftC_app.lean

DataTypesAsLattices/Functionality/inrightC_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/inrightC_app.lean

DataTypesAsLattices/Functionality/plotkinE_erase.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plotkinE_erase.lean

DataTypesAsLattices/Functionality/plotkinGood.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plotkinGood.lean

DataTypesAsLattices/Functionality/plotkinRel.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plotkinRel.lean

DataTypesAsLattices/Functionality/plotkinE.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plotkinE.lean

DataTypesAsLattices/Functionality/plusR_map_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_map_isScottContinuous.lean

DataTypesAsLattices/Functionality/plusR_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_app.lean

DataTypesAsLattices/Functionality/eq_4_32.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_32.lean

DataTypesAsLattices/Functionality/eq_4_33.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_33.lean
DataTypesAsLattices/Functionality/plusR_app_bot.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_app_bot.lean
DataTypesAsLattices/Functionality/plusR_app_top.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_app_top.lean
DataTypesAsLattices/Functionality/eq_4_13.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_13.lean
DataTypesAsLattices/Functionality/plusR_fst.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_fst.lean
DataTypesAsLattices/Functionality/eq_4_36.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_36.lean
DataTypesAsLattices/Functionality/plusR_functor.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_functor.lean
DataTypesAsLattices/Functionality/plusR_isRetract.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_isRetract.lean
DataTypesAsLattices/Functionality/eq_4_34.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_34.lean
DataTypesAsLattices/Functionality/eq_4_35.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_35.lean
DataTypesAsLattices/Functionality/eq_4_37.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_37.lean
DataTypesAsLattices/Functionality/plusR_isStrict.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_isStrict.lean
DataTypesAsLattices/Functionality/plusR_retractLe.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_retractLe.lean
DataTypesAsLattices/Functionality/plusR_right_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_right_isScottContinuous.lean
DataTypesAsLattices/Functionality/lambF_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/lambF_isScottContinuous.
DataTypesAsLattices/Functionality/eq_4_39.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_39.lean
DataTypesAsLattices/Functionality/lambR_fixedPoint.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/lambR_fixedPoint.lean
DataTypesAsLattices/Functionality/lambR_isRetract.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/lambR_isRetract.lean
DataTypesAsLattices/Functionality/envR_isRetract.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/envR_isRetract.lean
DataTypesAsLattices/Functionality/plusR_snd.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_snd.lean
DataTypesAsLattices/Functionality/plusR_typed_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_typed_bot.lean

DataTypesAsLattices/Functionality/plusR_typed_inl.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_typed_inl.lean

DataTypesAsLattices/Functionality/plusR_typed_inr.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_typed_inr.lean

DataTypesAsLattices/Functionality/plusR_typed_top.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_typed_top.lean

DataTypesAsLattices/Functionality/plusR_typed_iff.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plusR_typed_iff.lean

DataTypesAsLattices/Functionality/theorem_4_5_sum.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/theorem_4_5_sum.lean

DataTypesAsLattices/Functionality/predSet_iterate_expTag_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/predSet_iterate_expTag_isScottContinuous.lean

DataTypesAsLattices/Functionality/predSet_iterate_ofNat.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/predSet_iterate_ofNat.lean

DataTypesAsLattices/Functionality/predSet_iterate_self.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/predSet_iterate_self.lean

DataTypesAsLattices/Functionality/prodE.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/prodE.lean

DataTypesAsLattices/Functionality/seq4_body_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/seq4_body_isScottContinuous.lean

DataTypesAsLattices/Functionality/seq4_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/seq4_app.lean

DataTypesAsLattices/Functionality/seq4_app_one.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/seq4_app_one.lean

DataTypesAsLattices/Functionality/seq4_app_three.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/seq4_app_three.lean

DataTypesAsLattices/Functionality/seq4_app_two.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/seq4_app_two.lean

DataTypesAsLattices/Functionality/seq4_app_zero.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/seq4_app_zero.lean

DataTypesAsLattices/Functionality/seq4_comp_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/seq4_comp_isScottContinuous.lean
DataTypesAsLattices/Functionality/seq4_isScottContinuous_each.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/seq4_isScottContinuous_each.lean
DataTypesAsLattices/Functionality/sigmaJ.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/sigmaJ.lean
DataTypesAsLattices/Functionality/sigmaJ_bot.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/sigmaJ_bot.lean
DataTypesAsLattices/Functionality/sigmaJ_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/sigmaJ_isScottContinuous
DataTypesAsLattices/Functionality/sigmaJ_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/sigmaJ_app.lean
DataTypesAsLattices/Functionality/sigmaJ_of_no_tag.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/sigmaJ_of_no_tag.lean
DataTypesAsLattices/Functionality/finite_sigma_plain_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/finite_sigma_plain_app.lean
DataTypesAsLattices/Functionality/sigmaJ_pair_union.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/sigmaJ_pair_union.lean
DataTypesAsLattices/Functionality/sigmaJ_succ_ne.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/sigmaJ_succ_ne.lean
DataTypesAsLattices/Functionality/eq_7_18_ne.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_7_18_ne.lean
DataTypesAsLattices/Functionality/sigmaJ_succ_singleton.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/sigmaJ_succ_singleton.lean
DataTypesAsLattices/Functionality/eq_7_18_eq.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_7_18_eq.lean
DataTypesAsLattices/Functionality/eq_7_19.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_7_19.lean
DataTypesAsLattices/Functionality/sigmaJ_union_fresh.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/sigmaJ_union_fresh.lean
DataTypesAsLattices/Functionality/finite_sigma_union_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/finite_sigma_union_app.lean
DataTypesAsLattices/Functionality/plotkin_finite_separation.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plotkin_finite_separation.lean

DataTypesAsLattices/Functionality/plotkin_function_related.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plotkin_function_related.lean

DataTypesAsLattices/Functionality/singletonE.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/singletonE.lean

DataTypesAsLattices/Functionality/singletonE_mem.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/singletonE_mem.lean

DataTypesAsLattices/Functionality/sumE.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/sumE.lean

DataTypesAsLattices/Functionality/sumMed.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/sumMed.lean

DataTypesAsLattices/Functionality/sumMed_body_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/sumMed_body_isScottContinuous.lean

DataTypesAsLattices/Functionality/sumMed_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/sumMed_app.lean

DataTypesAsLattices/Functionality/sumMed_app_inl.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/sumMed_app_inl.lean

DataTypesAsLattices/Functionality/sumMed_app_inr.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/sumMed_app_inr.lean

DataTypesAsLattices/Functionality/sumMed_isGraph.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/sumMed_isGraph.lean

DataTypesAsLattices/Functionality/sumMed_rel.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/sumMed_rel.lean

DataTypesAsLattices/Functionality/sumMed_rel_unique.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/sumMed_rel_unique.lean

DataTypesAsLattices/Functionality/tagInj_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/tagInj_isScottContinuous

DataTypesAsLattices/Functionality/plus7_comp_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_comp_isScottContinuous.lean

DataTypesAsLattices/Functionality/plus7_map_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_map_isScottContinuous.lean

DataTypesAsLattices/Functionality/plus7_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_app.lean

DataTypesAsLattices/Functionality/plus7_app_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_app_bot.lean

DataTypesAsLattices/Functionality/plus7_app_top.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_app_top.lean
DataTypesAsLattices/Functionality/tagInj_one.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/tagInj_one.lean
DataTypesAsLattices/Functionality/tagInj_zero.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/tagInj_zero.lean
DataTypesAsLattices/Functionality/Hstep_tag0.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hstep_tag0.lean
DataTypesAsLattices/Functionality/Hstep_tag1.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hstep_tag1.lean
DataTypesAsLattices/Functionality/Hstep_tag2.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hstep_tag2.lean
DataTypesAsLattices/Functionality/Hstep_tag3.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hstep_tag3.lean
DataTypesAsLattices/Functionality/Hstep_tag4.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hstep_tag4.lean
DataTypesAsLattices/Functionality/Hstep_tag5.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hstep_tag5.lean
DataTypesAsLattices/Functionality/Hstep_tag6.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hstep_tag6.lean
DataTypesAsLattices/Functionality/plus7_app_tag0.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_app_tag0.lean
DataTypesAsLattices/Functionality/plus7_app_tag1.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_app_tag1.lean
DataTypesAsLattices/Functionality/plus7_app_tag2.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_app_tag2.lean
DataTypesAsLattices/Functionality/plus7_app_tag3.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_app_tag3.lean
DataTypesAsLattices/Functionality/plus7_app_tag4.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_app_tag4.lean
DataTypesAsLattices/Functionality/plus7_app_tag5.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_app_tag5.lean
DataTypesAsLattices/Functionality/plus7_app_tag6.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_app_tag6.lean
DataTypesAsLattices/Functionality/plus7_isRetract.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_isRetract.lean
DataTypesAsLattices/Functionality/plus7_typed_inl0.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_typed_inl0.lean

DataTypesAsLattices/Functionality/plus7_typed_inl1.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_typed_inl1.lean

DataTypesAsLattices/Functionality/plus7_typed_inl2.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_typed_inl2.lean

DataTypesAsLattices/Functionality/plus7_typed_inl3.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_typed_inl3.lean

DataTypesAsLattices/Functionality/plus7_typed_inl4.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_typed_inl4.lean

DataTypesAsLattices/Functionality/plus7_typed_inl5.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_typed_inl5.lean

DataTypesAsLattices/Functionality/plus7_typed_inl6.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/plus7_typed_inl6.lean

DataTypesAsLattices/Functionality/tensor4_diag_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/tensor4_diag_isScottContinuous.lean

DataTypesAsLattices/Functionality/tensor4_map_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/tensor4_map_isScottContinuous.lean

DataTypesAsLattices/Functionality/tensor4_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/tensor4_app.lean

DataTypesAsLattices/Functionality/tensor4_isRetract.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/tensor4_isRetract.lean

DataTypesAsLattices/Functionality/tensorR_diag_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/tensorR_diag_isScottContinuous.lean

DataTypesAsLattices/Functionality/tensorR_map_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/tensorR_map_isScottContinuous.lean

DataTypesAsLattices/Functionality/tensorR_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/tensorR_app.lean

DataTypesAsLattices/Functionality/theorem_4_4_typed.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/theorem_4_4_typed.lean

DataTypesAsLattices/Functionality/eq_4_12.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_12.lean

DataTypesAsLattices/Functionality/eq_4_19.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_19.lean

DataTypesAsLattices/Functionality/eq_4_20.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_20.lean

DataTypesAsLattices/Functionality/eq_4_21.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_21.lean

DataTypesAsLattices/Functionality/tensorR_functor.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/tensorR_functor.lean

DataTypesAsLattices/Functionality/tensorR_isRetract.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/tensorR_isRetract.lean

DataTypesAsLattices/Functionality/eq_4_17.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_17.lean

DataTypesAsLattices/Functionality/eq_4_18.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_18.lean

DataTypesAsLattices/Functionality/eq_4_24.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_24.lean

DataTypesAsLattices/Functionality/eq_4_25.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_25.lean

DataTypesAsLattices/Functionality/tensorR_isStrict.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/tensorR_isStrict.lean

DataTypesAsLattices/Functionality/tensorR_retractLe.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/tensorR_retractLe.lean

DataTypesAsLattices/Functionality/tensorR_right_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/tensorR_right_isScottContinuous.lean

DataTypesAsLattices/Functionality/expF_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/expF_isScottContinuous.l

DataTypesAsLattices/Functionality/eq_4_44.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_44.lean

DataTypesAsLattices/Functionality/expR_isRetract.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/expR_isRetract.lean

DataTypesAsLattices/Functionality/treeF_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/treeF_isScottContinuous.

DataTypesAsLattices/Functionality/eq_4_38.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_38.lean

DataTypesAsLattices/Functionality/treeR_fixedPoint.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/treeR_fixedPoint.lean

DataTypesAsLattices/Functionality/treeR_isRetract.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/treeR_isRetract.lean

DataTypesAsLattices/Functionality/typed_apply_retract.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/typed_apply_retract.lean

DataTypesAsLattices/Functionality/Hcomb_typed.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hcomb_typed.lean

DataTypesAsLattices/Functionality/Htyped_typed.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/Htyped_typed.lean

DataTypesAsLattices/Functionality/typed_bot_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/typed_bot_bot.lean

DataTypesAsLattices/Functionality/tree_atom.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/tree_atom.lean

DataTypesAsLattices/Functionality/typed_bot_botElem.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/typed_bot_botElem.lean

DataTypesAsLattices/Functionality/typed_bot_lamb.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/typed_bot_lamb.lean

DataTypesAsLattices/Functionality/typed_env_nth.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/typed_env_nth.lean

DataTypesAsLattices/Functionality/typed_inleft_int_lamb.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/typed_inleft_int_lamb.lean

DataTypesAsLattices/Functionality/typed_inright_arrow_lamb.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/typed_inright_arrow_lamb.lean

DataTypesAsLattices/Functionality/typed_isGraph.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/typed_isGraph.lean

DataTypesAsLattices/Functionality/theorem_4_4_med.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/theorem_4_4_med.lean

DataTypesAsLattices/Functionality/theorem_4_4_med_unique.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/theorem_4_4_med_unique.lean

DataTypesAsLattices/Functionality/eval_curry.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/eval_curry.lean

DataTypesAsLattices/Functionality/typed_ofNat_intR.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/typed_ofNat_intR.lean

DataTypesAsLattices/Functionality/typed_pairSeq_tensorR.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/typed_pairSeq_tensorR.lean

DataTypesAsLattices/Functionality/encodeExp_typed.lean

Lean source: DomainTheory/DataTypesAsLattices/Functionality/encodeExp_typed.lean

DataTypesAsLattices/Functionality/tree_node.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/tree_node.lean
DataTypesAsLattices/Functionality/updateEnvUnion.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/updateEnvUnion.lean
DataTypesAsLattices/Functionality/hLam.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/hLam.lean
DataTypesAsLattices/Functionality/updateEnvUnion_isScottContinuous_idx.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/updateEnvUnion_isScottContinuous_idx.lean
DataTypesAsLattices/Functionality/hLam_isScottContinuous_e.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/hLam_isScottContinuous_e.lean
DataTypesAsLattices/Functionality/Hstep_isScottContinuous_e.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hstep_isScottContinuous_e.lean
DataTypesAsLattices/Functionality/HF_inner_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/HF_inner_isScottContinuous.lean
DataTypesAsLattices/Functionality/HF_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/HF_app.lean
DataTypesAsLattices/Functionality/updateEnvUnion_ofNat.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/updateEnvUnion_ofNat.lean
DataTypesAsLattices/Functionality/updateEnv_isScottContinuous_t.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/updateEnv_isScottContinuous_t.lean
DataTypesAsLattices/Functionality/updateEnvUnion_isScottContinuous_t.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/updateEnvUnion_isScottContinuous_t.lean
DataTypesAsLattices/Functionality/hLam_isScottContinuous_t.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/hLam_isScottContinuous_t.lean
DataTypesAsLattices/Functionality/Hstep_isScottContinuous_t.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hstep_isScottContinuous_t.lean
DataTypesAsLattices/Functionality/HF_app2.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/HF_app2.lean
DataTypesAsLattices/Functionality/Hfun_app2.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hfun_app2.lean
DataTypesAsLattices/Functionality/Hfun_interp.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hfun_interp.lean
DataTypesAsLattices/Functionality/Hfun_decode.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hfun_decode.lean
DataTypesAsLattices/Functionality/eq_4_45.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/eq_4_45.lean

DataTypesAsLattices/Functionality/Hcomb_decode.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hcomb_decode.lean
DataTypesAsLattices/Functionality/whichC.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/whichC.lean
DataTypesAsLattices/Functionality/Hinterp.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hinterp.lean
DataTypesAsLattices/Functionality/Htyped.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Htyped.lean
DataTypesAsLattices/Functionality/hApp.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/hApp.lean
DataTypesAsLattices/Functionality/hCond.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/hCond.lean
DataTypesAsLattices/Functionality/hPred.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/hPred.lean
DataTypesAsLattices/Functionality/hSucc.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/hSucc.lean
DataTypesAsLattices/Functionality/Hstep.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hstep.lean
DataTypesAsLattices/Functionality/HF.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/HF.lean
DataTypesAsLattices/Functionality/Hfun.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hfun.lean
DataTypesAsLattices/Functionality/Hcomb.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/Hcomb.lean
DataTypesAsLattices/Functionality/whichC_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Functionality/whichC_app.lean

2.41.4 AI: AI-Lean to AI-English

2.41.5 AI: AI-English to Human-English Concordance

2.42 Enumeration and degrees

2.42.1 Historical note

Reduction to a few combinators is old in combinatory logic. The device special to this model is (3.1), which folds the arithmetical combinators into the one combinator $\mathbf{G}$. The Gödel numbering and the second recursion theorem are the standard constructions, written so that arithmetic and the type-free combinators share a notation, and the incompleteness theorem is the standard one in that notation. Theorem 3.5 is the argument of Myhill and Shepherdson (1955); Martin Hyland pointed out the connection. Theorem 3.6 restates enumeration degrees, as in Rogers (1967), Sasso (1975), and Gutteridge (1971). Scott notes that this area was underdeveloped beside the theory of Turing degrees. Semigroups of combinators had been discussed by Church and by Böhm, and Theorem 3.7 reads that discussion inside $\mathbf{RE} \cap \mathbf{FUN}$.

Dependencies. Inside Enumeration, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.




Figure 14: Historical note.

2.42.2 Human-English

A great advantage of the combinators from the formal point of view is that (bound) variables are eliminated in favor of "algebraic" combinations. The disadvantage is that the algebra is not all that pretty, as the combinations tend to get rather long and general laws are rather few. Nevertheless as a technical device it is mildly remarkable that we can have a notation for all r.e. sets requiring so few primitives. In the model defined here the reduction to one combinator rests on a lemma about conditionals:

$$(3.1) \quad \mathbf{cond}(x)(y)(\mathbf{cond}(x)(y)) = y.$$

Recall that **cond** (or $\supset$) is a test for zero, so that:

$$(3.2) \quad \mathbf{cond}(x)(y)(0) = x.$$

This suggests that we lump all combinators of Theorem 2.4 into this one:

$$(3.3) \quad \mathbf{G} = \mathbf{cond}(\langle \mathbf{suc}, \mathbf{pred}, \mathbf{cond}, \mathbf{K}, \mathbf{S} \rangle)(0).$$

We can then readily prove:

- Theorem 3.1
- Theorem 3.2
- Theorem 3.3
- Theorem 3.4
- Theorem 3.5
- Theorem 3.6
- Theorem 3.7

2.42.3 AI: Human-English to AI-Lean

DataTypesAsLattices/Enumeration/Deg_isSubalgebra.lean
Lean source: `DomainTheory/DataTypesAsLattices/Enumeration/Deg_isSubalgebra.lean`
DataTypesAsLattices/Enumeration/Gcomb_bot.lean
Lean source: `DomainTheory/DataTypesAsLattices/Enumeration/Gcomb_bot.lean`
DataTypesAsLattices/Enumeration/Gcomb_isRE.lean
Lean source: `DomainTheory/DataTypesAsLattices/Enumeration/Gcomb_isRE.lean`
DataTypesAsLattices/Enumeration/Gcomb_succ.lean
Lean source: `DomainTheory/DataTypesAsLattices/Enumeration/Gcomb_succ.lean`
DataTypesAsLattices/Enumeration/GeneratedSubalgebra_generator.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/GeneratedSubalgebra_generator.lean

DataTypesAsLattices/Enumeration/GeneratedSubalgebra_isSubalgebra.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/GeneratedSubalgebra_isSubalgebra.lean

DataTypesAsLattices/Enumeration/Gpack.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Gpack.lean

DataTypesAsLattices/Enumeration/Gcomb.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Gcomb.lean

DataTypesAsLattices/Enumeration/GeneratedFromG.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/GeneratedFromG.lean

DataTypesAsLattices/Enumeration/Icomb_SK_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Icomb_SK_app.lean

DataTypesAsLattices/Enumeration/Deg_self.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Deg_self.lean

DataTypesAsLattices/Enumeration/Lcomb.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Lcomb.lean

DataTypesAsLattices/Enumeration/Lcomb_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Lcomb_app.lean

DataTypesAsLattices/Enumeration/Lterm_interp.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Lterm_interp.lean

DataTypesAsLattices/Enumeration/Lcomb_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Lcomb_combinatory.lean

DataTypesAsLattices/Enumeration/REPredu2eexists_param.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/REPredu2eexists_param.lean

DataTypesAsLattices/Enumeration/Rcomb.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Rcomb.lean

DataTypesAsLattices/Enumeration/barPos.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barPos.lean

DataTypesAsLattices/Enumeration/barPos_one.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barPos_one.lean

DataTypesAsLattices/Enumeration/barPos_two.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barPos_two.lean

DataTypesAsLattices/Enumeration/barPos_zero.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barPos_zero.lean

DataTypesAsLattices/Enumeration/barStepBody.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barStepBody.lean

DataTypesAsLattices/Enumeration/barStep.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barStep.lean

DataTypesAsLattices/Enumeration/barComb.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barComb.lean

DataTypesAsLattices/Enumeration/Gbar.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Gbar.lean

DataTypesAsLattices/Enumeration/barStepBody_isScottContinuous_B.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barStepBody_isScottContinuous_B.lean

DataTypesAsLattices/Enumeration/barStep_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barStep_isScottContinuous.

DataTypesAsLattices/Enumeration/combinatory_mem_Deg.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/combinatory_mem_Deg.lean

DataTypesAsLattices/Enumeration/combinatory_mem_subalgebra.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/combinatory_mem_subalgebra.lean

DataTypesAsLattices/Enumeration/condC_app2.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/condC_app2.lean

DataTypesAsLattices/Enumeration/condClosed_avoids8.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/condClosed_avoids8.lean

DataTypesAsLattices/Enumeration/condClosed_interp.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/condClosed_interp.lean

DataTypesAsLattices/Enumeration/condSet_same.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/condSet_same.lean

DataTypesAsLattices/Enumeration/cond_graph_eq_bot_iff.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/cond_graph_eq_bot_iff.lean

DataTypesAsLattices/Enumeration/e_subset_ofNat_iff.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/e_subset_ofNat_iff.lean

DataTypesAsLattices/Enumeration/enumBottomTerm_avoids.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/enumBottomTerm_avoids.lean

DataTypesAsLattices/Enumeration/enumBottomTerm_interp.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/enumBottomTerm_interp.lean

DataTypesAsLattices/Enumeration/enumComp.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/enumComp.lean

DataTypesAsLattices/Enumeration/GeneratedSemigroup.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/GeneratedSemigroup.lean

DataTypesAsLattices/Enumeration/Gcomb_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Gcomb_app.lean

DataTypesAsLattices/Enumeration/Gcomb_eq_condC.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Gcomb_eq_condC.lean

DataTypesAsLattices/Enumeration/Gcomb_zero.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Gcomb_zero.lean

DataTypesAsLattices/Enumeration/Gpack_ne_bot.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Gpack_ne_bot.lean

DataTypesAsLattices/Enumeration/Gpack_one.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Gpack_one.lean

DataTypesAsLattices/Enumeration/Gpack_zero.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Gpack_zero.lean

DataTypesAsLattices/Enumeration/Extensional.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Extensional.lean

DataTypesAsLattices/Enumeration/Kcomb_from_G.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Kcomb_from_G.lean

DataTypesAsLattices/Enumeration/RE.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/RE.lean

DataTypesAsLattices/Enumeration/Scomb_from_G.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Scomb_from_G.lean

DataTypesAsLattices/Enumeration/ValTrace.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/ValTrace.lean

DataTypesAsLattices/Enumeration/applyNat.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/applyNat.lean

DataTypesAsLattices/Enumeration/argNat.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/argNat.lean

DataTypesAsLattices/Enumeration/bitList.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/bitList.lean

DataTypesAsLattices/Enumeration/bot_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/bot_combinatory.lean

DataTypesAsLattices/Enumeration/condC_from_G.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/condC_from_G.lean

DataTypesAsLattices/Enumeration/enumComp_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/enumComp_app.lean

DataTypesAsLattices/Enumeration/enumComp_eq_compose.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/enumComp_eq_compose.lean

DataTypesAsLattices/Enumeration/enumerationUnion_left_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/enumerationUnion_left_isScottContinuous.lean

DataTypesAsLattices/Enumeration/enumerationUnion_right_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/enumerationUnion_right_isScottContinuous.lean

DataTypesAsLattices/Enumeration/eq_3_10_apply.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_10_apply.lean

DataTypesAsLattices/Enumeration/eq_3_2.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_2.lean

DataTypesAsLattices/Enumeration/eq_3_5.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_5.lean

DataTypesAsLattices/Enumeration/eq_3_6.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_6.lean

DataTypesAsLattices/Enumeration/eq_3_8_apply.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_8_apply.lean
DataTypesAsLattices/Enumeration/eq_3_8_val.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_8_val.lean
DataTypesAsLattices/Enumeration/eq_3_9_apply.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_9_apply.lean
DataTypesAsLattices/Enumeration/eq_3_9_val.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_9_val.lean
DataTypesAsLattices/Enumeration/eq_3_10_val.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_10_val.lean
DataTypesAsLattices/Enumeration/eq_3_12.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_12.lean
DataTypesAsLattices/Enumeration/exists_triangle_succ.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/exists_triangle_succ.lean
DataTypesAsLattices/Enumeration/filterRealizer_realizes.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/filterRealizer_realizes.lean
DataTypesAsLattices/Enumeration/filterSeq_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/filterSeq_isScottContinuous.lean
DataTypesAsLattices/Enumeration/filterC_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/filterC_app.lean
DataTypesAsLattices/Enumeration/funRetractTerm_interp.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/funRetractTerm_interp.lean
DataTypesAsLattices/Enumeration/funRetract_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/funRetract_combinatory.lean
DataTypesAsLattices/Enumeration/enumComp_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/enumComp_combinatory.lean
DataTypesAsLattices/Enumeration/graph_mem_FUN.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/graph_mem_FUN.lean
DataTypesAsLattices/Enumeration/Lcomb_mem_FUN.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Lcomb_mem_FUN.lean
DataTypesAsLattices/Enumeration/enumComp_mem_FUN.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/enumComp_mem_FUN.lean
DataTypesAsLattices/Enumeration/haltEnum.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/haltEnum.lean
DataTypesAsLattices/Enumeration/beforeHalt.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/beforeHalt.lean
DataTypesAsLattices/Enumeration/BasicInst85.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/BasicInst85.lean

DataTypesAsLattices/Enumeration/Avoids.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Avoids.lean

DataTypesAsLattices/Enumeration/Deg.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Deg.lean

DataTypesAsLattices/Enumeration/Icomb_SK.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Icomb_SK.lean

DataTypesAsLattices/Enumeration/Subalgebra.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Subalgebra.lean

DataTypesAsLattices/Enumeration/GeneratedSubalgebra.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/GeneratedSubalgebra.lean

DataTypesAsLattices/Enumeration/Lterm.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Lterm.lean

DataTypesAsLattices/Enumeration/TOT.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/TOT.lean

DataTypesAsLattices/Enumeration/condClosed.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/condClosed.lean

DataTypesAsLattices/Enumeration/enumBottomTerm.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/enumBottomTerm.lean

DataTypesAsLattices/Enumeration/filterNum.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/filterNum.lean

DataTypesAsLattices/Enumeration/filterTerm.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/filterTerm.lean

DataTypesAsLattices/Enumeration/funRetractTerm.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/funRetractTerm.lean

DataTypesAsLattices/Enumeration/haltEnum_range_re.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/haltEnum_range_re.lean

DataTypesAsLattices/Enumeration/haltEnum_succ_iff.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/haltEnum_succ_iff.lean

DataTypesAsLattices/Enumeration/haltEnum_range_not_computable.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/haltEnum_range_not_computable.lean

DataTypesAsLattices/Enumeration/interStepTerm.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/interStepTerm.lean

DataTypesAsLattices/Enumeration/interStepTerm_interp.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/interStepTerm_interp.lean

DataTypesAsLattices/Enumeration/interC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/interC_combinatory.lean

DataTypesAsLattices/Enumeration/interp_avoids.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/interp_avoids.lean

DataTypesAsLattices/Enumeration/kClosed.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/kClosed.lean

DataTypesAsLattices/Enumeration/kClosed_avoids8.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/kClosed_avoids8.lean
DataTypesAsLattices/Enumeration/kClosed_interp.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/kClosed_interp.lean
DataTypesAsLattices/Enumeration/mem_funOf_ofNat.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/mem_funOf_ofNat.lean
DataTypesAsLattices/Enumeration/funOf_ofNat_mem_re.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/funOf_ofNat_mem_re.lean
DataTypesAsLattices/Enumeration/myhillRealizer_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/myhillRealizer_isScottContinuous.lean
DataTypesAsLattices/Enumeration/not_mem_zero_Gcomb.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/not_mem_zero_Gcomb.lean
DataTypesAsLattices/Enumeration/Gcomb_app_self.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Gcomb_app_self.lean
DataTypesAsLattices/Enumeration/not_mem_zero_cond_graph.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/not_mem_zero_cond_graph.lean
DataTypesAsLattices/Enumeration/eq_3_1.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_1.lean
DataTypesAsLattices/Enumeration/num.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/num.lean
DataTypesAsLattices/Enumeration/opNat.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/opNat.lean
DataTypesAsLattices/Enumeration/packList.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/packList.lean
DataTypesAsLattices/Enumeration/packList_components_mem_Deg.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/packList_components_mem_Deg.lean
DataTypesAsLattices/Enumeration/packList_cons_zero.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/packList_cons_zero.lean
DataTypesAsLattices/Enumeration/predC_from_G.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/predC_from_G.lean
DataTypesAsLattices/Enumeration/predClosed.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/predClosed.lean
DataTypesAsLattices/Enumeration/predClosed_avoids8.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/predClosed_avoids8.lean
DataTypesAsLattices/Enumeration/predClosed_interp.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/predClosed_interp.lean

DataTypesAsLattices/Enumeration/primrec_applyNat.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrec_applyNat.lean

DataTypesAsLattices/Enumeration/primrec_diagonalInterCode.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrec_diagonalInterCode.

DataTypesAsLattices/Enumeration/primrec_haltEnum.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrec_haltEnum.lean

DataTypesAsLattices/Enumeration/primrecPred_beforeHalt.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrecPred_beforeHalt.lean

DataTypesAsLattices/Enumeration/primrec_filterNum.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrec_filterNum.lean

DataTypesAsLattices/Enumeration/filterRealizer.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/filterRealizer.lean

DataTypesAsLattices/Enumeration/filterEnv.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/filterEnv.lean

DataTypesAsLattices/Enumeration/filterC.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/filterC.lean

DataTypesAsLattices/Enumeration/filterRealizer_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/filterRealizer_combinatory.lean

DataTypesAsLattices/Enumeration/filterEnv_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/filterEnv_combinatory.lean

DataTypesAsLattices/Enumeration/filterC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/filterC_combinatory.lean

DataTypesAsLattices/Enumeration/primrec_myhillCase2Code.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrec_myhillCase2Code.le

DataTypesAsLattices/Enumeration/primrec_myhillFilterCode.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrec_myhillFilterCode.l

DataTypesAsLattices/Enumeration/primrec_myhillCase1Code.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrec_myhillCase1Code.le

DataTypesAsLattices/Enumeration/primrec_num.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrec_num.lean

DataTypesAsLattices/Enumeration/primrec_recNat.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrec_recNat.lean

DataTypesAsLattices/Enumeration/primrec_secondRecV.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrec_secondRecV.lean

DataTypesAsLattices/Enumeration/primrec_triangle.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrec_triangle.lean

DataTypesAsLattices/Enumeration/primrec_unpairW.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrec_unpairW.lean

DataTypesAsLattices/Enumeration/primrecu2082_finAux.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrecu2082_finAux.lean

DataTypesAsLattices/Enumeration/primrec_fin.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrec_fin.lean

DataTypesAsLattices/Enumeration/realizes_valNat_mem.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/realizes_valNat_mem.lean

DataTypesAsLattices/Enumeration/recNat.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/recNat.lean

DataTypesAsLattices/Enumeration/sClosed.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/sClosed.lean

DataTypesAsLattices/Enumeration/sClosed_avoids8.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/sClosed_avoids8.lean

DataTypesAsLattices/Enumeration/sClosed_interp.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/sClosed_interp.lean

DataTypesAsLattices/Enumeration/secondRecSubst.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/secondRecSubst.lean

DataTypesAsLattices/Enumeration/primrec_secondRecSubst.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrec_secondRecSubst.lea

DataTypesAsLattices/Enumeration/secondRecSubstC.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/secondRecSubstC.lean

DataTypesAsLattices/Enumeration/secondRecOperator.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/secondRecOperator.lean

DataTypesAsLattices/Enumeration/secondRecSubstC_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/secondRecSubstC_combinatory.lean

DataTypesAsLattices/Enumeration/secondRecOperator_combinatory.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/secondRecOperator_combinatory.lean

DataTypesAsLattices/Enumeration/secondRecSubstC_realizes.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/secondRecSubstC_realizes.lean

DataTypesAsLattices/Enumeration/secondRecOperator_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/secondRecOperator_app.lean

DataTypesAsLattices/Enumeration/secondRecVal.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/secondRecVal.lean

DataTypesAsLattices/Enumeration/secondRecVal_isScottContinuous.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/secondRecVal_isScottContinuous.lean

DataTypesAsLattices/Enumeration/secondRecVal_app.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/secondRecVal_app.lean

DataTypesAsLattices/Enumeration/seq2Term.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/seq2Term.lean

DataTypesAsLattices/Enumeration/Rterm.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Rterm.lean
DataTypesAsLattices/Enumeration/seq2Term_avoids8.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/seq2Term_avoids8.lean
DataTypesAsLattices/Enumeration/seq2Term_interp.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/seq2Term_interp.lean
DataTypesAsLattices/Enumeration/Rterm_interp.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Rterm_interp.lean
DataTypesAsLattices/Enumeration/Rcomb_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Rcomb_combinatory.lean
DataTypesAsLattices/Enumeration/seq2_eq_SK.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/seq2_eq_SK.lean
DataTypesAsLattices/Enumeration/seq2_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/seq2_combinatory.lean
DataTypesAsLattices/Enumeration/Gpack_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Gpack_combinatory.lean
DataTypesAsLattices/Enumeration/Gcomb_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Gcomb_combinatory.lean
DataTypesAsLattices/Enumeration/seq2_left_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/seq2_left_isScottContinuous.lean
DataTypesAsLattices/Enumeration/seq2_mem_subalgebra.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/seq2_mem_subalgebra.lean
DataTypesAsLattices/Enumeration/packList_mem_subalgebra.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/packList_mem_subalgebra.lean
DataTypesAsLattices/Enumeration/seq2_right_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/seq2_right_isScottContinuous.lean
DataTypesAsLattices/Enumeration/Rcomb_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Rcomb_app.lean
DataTypesAsLattices/Enumeration/Rcomb_app_zero.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Rcomb_app_zero.lean
DataTypesAsLattices/Enumeration/Rcomb_mem_FUN.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Rcomb_mem_FUN.lean
DataTypesAsLattices/Enumeration/eq_3_16.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_16.lean
DataTypesAsLattices/Enumeration/eq_3_17_projections.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_17_projections.lean
DataTypesAsLattices/Enumeration/eq_3_17_semigroup.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_17_semigroup.lean
DataTypesAsLattices/Enumeration/seqConsTerm.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/seqConsTerm.lean

DataTypesAsLattices/Enumeration/barPosTerm.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barPosTerm.lean
DataTypesAsLattices/Enumeration/barStepTerm.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barStepTerm.lean
DataTypesAsLattices/Enumeration/seqConsTerm_interp.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/seqConsTerm_interp.lean
DataTypesAsLattices/Enumeration/barPosTerm_interp.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barPosTerm_interp.lean
DataTypesAsLattices/Enumeration/barStepTerm_interp.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barStepTerm_interp.lean
DataTypesAsLattices/Enumeration/barComb_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barComb_combinatory.lean
DataTypesAsLattices/Enumeration/Gbar_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Gbar_combinatory.lean
DataTypesAsLattices/Enumeration/seqCons_right_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/seqCons_right_isScottContinuous.lean
DataTypesAsLattices/Enumeration/barPos_isScottContinuous_u.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barPos_isScottContinuous_u.lean
DataTypesAsLattices/Enumeration/barPos_isScottContinuous_x.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barPos_isScottContinuous_x.lean
DataTypesAsLattices/Enumeration/barStepBody_isScottContinuous_u.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barStepBody_isScottContinuous_u.lean
DataTypesAsLattices/Enumeration/barStepBody_isScottContinuous_x.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barStepBody_isScottContinuous_x.lean
DataTypesAsLattices/Enumeration/barStep_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barStep_app.lean
DataTypesAsLattices/Enumeration/eq_3_15.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_15.lean
DataTypesAsLattices/Enumeration/Gbar_mem_FUN.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/Gbar_mem_FUN.lean
DataTypesAsLattices/Enumeration/barComb_app2.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barComb_app2.lean
DataTypesAsLattices/Enumeration/barComb_on_R.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barComb_on_R.lean
DataTypesAsLattices/Enumeration/barComb_on_barPos_R.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/barComb_on_barPos_R.lean

DataTypesAsLattices/Enumeration/eq_3_16_bar.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_16_bar.lean

DataTypesAsLattices/Enumeration/eq_3_16_operator.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_16_operator.lean

DataTypesAsLattices/Enumeration/eq_3_17.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/eq_3_17.lean

DataTypesAsLattices/Enumeration/bar_generated.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/bar_generated.lean

DataTypesAsLattices/Enumeration/generatedSemigroup_mem_RE_FUN.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/generatedSemigroup_mem_RE_FUN.lean

DataTypesAsLattices/Enumeration/singleGenerator.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/singleGenerator.lean

DataTypesAsLattices/Enumeration/singleGenerator_app_zero.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/singleGenerator_app_zero.lean

DataTypesAsLattices/Enumeration/singleGenerator_mem_subalgebra.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/singleGenerator_mem_subalgebra.lean

DataTypesAsLattices/Enumeration/sucC_from_G.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/sucC_from_G.lean

DataTypesAsLattices/Enumeration/sucC_zero.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/sucC_zero.lean

DataTypesAsLattices/Enumeration/sucClosed.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/sucClosed.lean

DataTypesAsLattices/Enumeration/gpackClosed.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/gpackClosed.lean

DataTypesAsLattices/Enumeration/gClosed.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/gClosed.lean

DataTypesAsLattices/Enumeration/sucClosed_avoids8.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/sucClosed_avoids8.lean

DataTypesAsLattices/Enumeration/sucClosed_interp.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/sucClosed_interp.lean

DataTypesAsLattices/Enumeration/gpackClosed_interp.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/gpackClosed_interp.lean

DataTypesAsLattices/Enumeration/gClosed_interp.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/gClosed_interp.lean

DataTypesAsLattices/Enumeration/unionBits.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/unionBits.lean

DataTypesAsLattices/Enumeration/unionBits_eq.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/unionBits_eq.lean

DataTypesAsLattices/Enumeration/e_eq_unionBits.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/e_eq_unionBits.lean

DataTypesAsLattices/Enumeration/unionOperator_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/unionOperator_app.lean

DataTypesAsLattices/Enumeration/unionTerm.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/unionTerm.lean

DataTypesAsLattices/Enumeration/unionTerm_interp.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/unionTerm_interp.lean

DataTypesAsLattices/Enumeration/unionOperator_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/unionOperator_combinatory.lean

DataTypesAsLattices/Enumeration/union_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/union_combinatory.lean

DataTypesAsLattices/Enumeration/unionBits_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/unionBits_combinatory.lean

DataTypesAsLattices/Enumeration/e_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/e_combinatory.lean

DataTypesAsLattices/Enumeration/unpairComp.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/unpairComp.lean

DataTypesAsLattices/Enumeration/unpairComp_eq.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/unpairComp_eq.lean

DataTypesAsLattices/Enumeration/mem_myhillQ.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/mem_myhillQ.lean

DataTypesAsLattices/Enumeration/unpairWRec.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/unpairWRec.lean

DataTypesAsLattices/Enumeration/unpairW.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/unpairW.lean

DataTypesAsLattices/Enumeration/unpairWRec_succ.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/unpairWRec_succ.lean

DataTypesAsLattices/Enumeration/unpairWRec_lt.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/unpairWRec_lt.lean

DataTypesAsLattices/Enumeration/unpairWRec_min.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/unpairWRec_min.lean

DataTypesAsLattices/Enumeration/unpairW_eq.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/unpairW_eq.lean

DataTypesAsLattices/Enumeration/primrec_unpairComp.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrec_unpairComp.lean
DataTypesAsLattices/Enumeration/vaalC_typed.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/vaalC_typed.lean
DataTypesAsLattices/Enumeration/vaalF.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/vaalF.lean
DataTypesAsLattices/Enumeration/vaalC.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/vaalC.lean
DataTypesAsLattices/Enumeration/vaalF_body_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/vaalF_body_isScottContinuous.lean
DataTypesAsLattices/Enumeration/vaalF_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/vaalF_app.lean
DataTypesAsLattices/Enumeration/vaalF_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/vaalF_isScottContinuous.le
DataTypesAsLattices/Enumeration/vaalC_fixedPoint.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/vaalC_fixedPoint.lean
DataTypesAsLattices/Enumeration/vaalC_unfold.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/vaalC_unfold.lean
DataTypesAsLattices/Enumeration/vaalStepTerm.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/vaalStepTerm.lean
DataTypesAsLattices/Enumeration/vaalStepTerm_interp.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/vaalStepTerm_interp.lean
DataTypesAsLattices/Enumeration/vaalC_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/vaalC_combinatory.lean
DataTypesAsLattices/Enumeration/vaalC_computable.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/vaalC_computable.lean
DataTypesAsLattices/Enumeration/vaalTyped.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/vaalTyped.lean
DataTypesAsLattices/Enumeration/valEntryJustified_mono.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valEntryJustified_mono.lean
DataTypesAsLattices/Enumeration/valNat.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat.lean
DataTypesAsLattices/Enumeration/valNat_Ycode.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_Ycode.lean
DataTypesAsLattices/Enumeration/valNat_botCode.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_botCode.lean
DataTypesAsLattices/Enumeration/valNat_combinatory.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_combinatory.lean
DataTypesAsLattices/Enumeration/valNat_condCode.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_condCode.lean
DataTypesAsLattices/Enumeration/valNat_filterOp.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_filterOp.lean

DataTypesAsLattices/Enumeration/valNat_interCode.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_interCode.lean
DataTypesAsLattices/Enumeration/valNat_diagonalInterCode.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_diagonalInterCode.l
DataTypesAsLattices/Enumeration/valNat_myhillFilterCode.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_myhillFilterCode.le
DataTypesAsLattices/Enumeration/valNat_myhillCase1Code.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_myhillCase1Code.lea
DataTypesAsLattices/Enumeration/valNat_secondRecOperatorCode.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_secondRecOperatorCo
DataTypesAsLattices/Enumeration/valNat_succ.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_succ.lean
DataTypesAsLattices/Enumeration/valNat_apply.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_apply.lean
DataTypesAsLattices/Enumeration/valNat_unionCode.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_unionCode.lean
DataTypesAsLattices/Enumeration/valNat_finAux.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_finAux.lean
DataTypesAsLattices/Enumeration/valNat_fin.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_fin.lean
DataTypesAsLattices/Enumeration/valNat_myhillCase2Code.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_myhillCase2Code.lea
DataTypesAsLattices/Enumeration/valNat_myhillCase2Code_bot.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_myhillCase2Code_
bot.lean
DataTypesAsLattices/Enumeration/valNat_myhillCase2Code_ne_bot.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_myhillCase2Code_
ne_bot.lean
DataTypesAsLattices/Enumeration/valNat_zero.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_zero.lean
DataTypesAsLattices/Enumeration/valRank.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valRank.lean
DataTypesAsLattices/Enumeration/valStepValue.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valStepValue.lean
DataTypesAsLattices/Enumeration/valStep.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valStep.lean
DataTypesAsLattices/Enumeration/valC.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valC.lean
DataTypesAsLattices/Enumeration/valStep_body_isScottContinuous.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valStep_body_
isScottContinuous.lean
DataTypesAsLattices/Enumeration/valStep_app.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valStep_app.lean
DataTypesAsLattices/Enumeration/valStep_app_succ.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valStep_app_succ.lean

DataTypesAsLattices/Enumeration/valStep_app_zero.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valStep_app_zero.lean

DataTypesAsLattices/Enumeration/valStage_eq_of_rank_le.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valStage_eq_of_rank_le.lean

DataTypesAsLattices/Enumeration/valStage_subset.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valStage_subset.lean

DataTypesAsLattices/Enumeration/valC_valNat.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valC_valNat.lean

DataTypesAsLattices/Enumeration/valTraceG.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valTraceG.lean

DataTypesAsLattices/Enumeration/valTraceG_re.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valTraceG_re.lean

DataTypesAsLattices/Enumeration/valTraceHas.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valTraceHas.lean

DataTypesAsLattices/Enumeration/valEntryJustified.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valEntryJustified.lean

DataTypesAsLattices/Enumeration/valTraceHas_append_left.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valTraceHas_append_left.lean

DataTypesAsLattices/Enumeration/valTraceHas_append_right.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valTraceHas_append_right.lean

DataTypesAsLattices/Enumeration/valTraceHas_iff.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valTraceHas_iff.lean

DataTypesAsLattices/Enumeration/primrecRel_valTraceHas.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrecRel_valTraceHas.lean

DataTypesAsLattices/Enumeration/primrecPred_valEntryJustified.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrecPred_valEntryJustified.lean

DataTypesAsLattices/Enumeration/primrecPred_valTraceStruct.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/primrecPred_valTraceStruct.lean

DataTypesAsLattices/Enumeration/valTraceOk_append.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valTraceOk_append.lean

DataTypesAsLattices/Enumeration/valTraceOk_cons.lean

Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valTraceOk_cons.lean

DataTypesAsLattices/Enumeration/valTraceOk_empty.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valTraceOk_empty.lean
DataTypesAsLattices/Enumeration/exists_concat_traces.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/exists_concat_traces.lean
DataTypesAsLattices/Enumeration/valTraceOk_re.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valTraceOk_re.lean
DataTypesAsLattices/Enumeration/valTraceOk_sound.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valTraceOk_sound.lean
DataTypesAsLattices/Enumeration/valTraceOk_zero.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valTraceOk_zero.lean
DataTypesAsLattices/Enumeration/valTraceOk_complete.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valTraceOk_complete.lean
DataTypesAsLattices/Enumeration/valNat_mem_iff.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_mem_iff.lean
DataTypesAsLattices/Enumeration/valNat_mem_re.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_mem_re.lean
DataTypesAsLattices/Enumeration/myhillQ_isRE.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/myhillQ_isRE.lean
DataTypesAsLattices/Enumeration/valNat_mem_comp_primrec.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valNat_mem_comp_primrec.lean
DataTypesAsLattices/Enumeration/valTraceStruct.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valTraceStruct.lean
DataTypesAsLattices/Enumeration/valTraceOk.lean
Lean source: DomainTheory/DataTypesAsLattices/Enumeration/valTraceOk.lean

2.42.4 AI: AI-Lean to AI-English

2.42.5 AI: AI-English to Human-English Concordance

3 Neighbourhood systems

Dependency diagram. Each box is one section. The arrowhead is on the section that imports, and the number on it is how many import lines run that way. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it has no arrow.

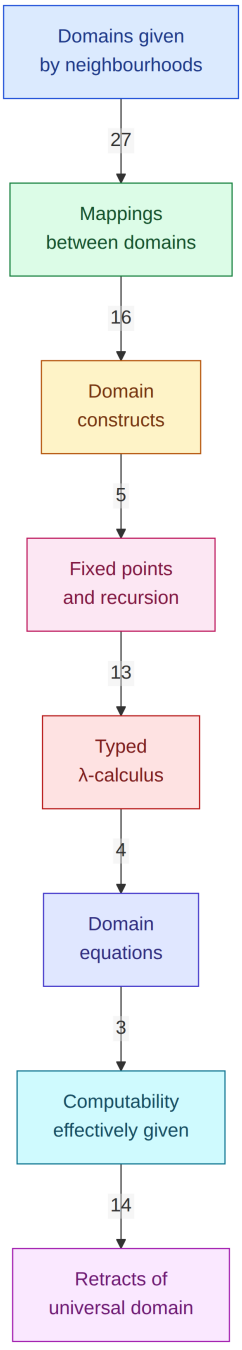


Figure 15: Neighbourhood systems.

3.1 Introduction

3.1.1 Human-English

3.2 INTRODUCTION

These notes were written in conjunction with the lectures delivered by me for the Semantics of Programming Languages sequence during Michaelmas Term 1980 at Oxford. I started writing around the first week of October and finished at the end of November. The purpose of the course was to provide the foundations needed for the method of denotational semantics; in particular, I wanted to make the connections with recursive function theory more definite and to show explicit, effectively given solutions to domain equations. Roughly, these chapters cover the first half of the book of J.E. Stoy. I plan soon to expand the notes into a book by adding additional chapters on other theoretical topics that time did not permit me to cover in one eight-week term.

When I started writing Lecture I in October, I did not know what the later lectures would contain: I could see no further ahead than part of Lecture III in the beginning. The lectures had to be typed in advance of the class meetings, however, so there was at the time of composition no opportunity for second thoughts of any major proportions: I had to write the text straight through. As a consequence there are many remarks I would like to transpose and many additional points of explanation I see are needed; further worked examples and easier exercises are also required. During the spring, after receiving many helpful comments, I was able to introduce a few changes in the text and make some necessary corrections. However, a complete retyping was impossible. Nevertheless, this preliminary version of the book seems to provide a quite detailed introduction and is sufficient to exhibit the scope of the approach and several applications.

The idea of using neighbourhood systems to give set-theoretical representations of domains had been in the back of

my mind for some time in connection with specific examples. But the thought that a systematic development along these lines might be easier to follow than the more abstract lattice-theoretic and topological approach used by myself and others in many publications only came to me during the IFIP Working Group 2.2 meeting in Copenhagen in mid-June 1980. I gave a brief public presentation at ICALP '80 in Holland in mid-July.

One large mistake I have made is to de-emphasize partial orderings too much, since at the right point the concepts and the language are in fact helpful. The basic plan is that, instead of axiomatizing the theory using partial orderings, the necessary facts come out as *theorems*. For a neighbourhood system $\mathcal{D}$, the set of elements $|\mathcal{D}|$, which consists of filters, is naturally partially ordered. And approximable mappings naturally *preserve* the ordering. And so on. The advantage I see from the point of view of exposition is that properties can be brought out one at a time instead of having to put them down all in advance of any experience with the ideas. My own feeling after writing these chapters is that the plan has worked out far better than I could have dared to hope. I was especially glad that I could generate so many *exercises*, and I hope eventually to provide many more. One interesting place at which partial orderings prove their usefulness is in visualizing domains. As it stands now the text does not contain enough in the way of pictures. This will have to be remedied in a future version. Undoubtedly to include enough explanation, several of the lectures will have to be sub-divided into separate chapters.

One major improvement is needed: to bring Exercise 2.22 into the main text. I did not know in advance how often I would need this result for giving (easy) set-theoretical characterizations of domains and structure on them. This will be an easy repair, but it will cause quite a bit of rewriting. Clearly

much more has to be said about the interplay between elements and neighbourhoods. In particular, the character of the elements of a domain, like the power set of a set, has not been sufficiently illustrated, and

quite a bit of expansion on this topic is also needed.

Finally I have to explain that I had no time whatsoever to put in references and a bibliography. The ideas I have used have occurred to many, many people who have worked on domains, and I do not wish to claim originality. I *am* claiming some advantage to my style of representation, but I fully realize that a published version will have to have detailed historical references and notes at the ends of the lectures. Needless to say I should very much appreciate any advice or criticism from readers of this preliminary version.

I would like to give a warm word of thanks to the many people who have already commented on the preliminary text both at Oxford and in Boston, where I gave lectures. Very special thanks are due to Steve Comer and Steve Brookes, who spent many hours proof reading the typescripts. The biggest word of thanks, however, is reserved for Elsie Hinkes who, under very considerable pressure, did a wonderful job of typing.

Dana S. Scott
Merton College
Oxford
May 1981

3.3 Domains given by neighbourhoods

Dependency diagram. Each box is one item. The arrowhead is on the item that imports. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it is not shown. Blue is a definition, green a factoid, amber an example, red a theorem, and indigo an exercise.

3.4 Introduction

3.4.1 Human-English

3.5 LECTURE I

DOMAINS GIVEN BY NEIGHBOURHOODS

Often an object (or element) can be determined by a selection of its properties. Often it is also the case that it is easier (more convenient, more elementary) to think of these properties than it is to think of the elements themselves. Let us term the properties under consideration *neighbourhoods*, the family of those allowed a *neighbourhood system*.

Generally, the collection of these neighbourhoods is, for one reason or another, somewhat restricted; that is, a completely arbitrary property may not be allowable as a neighbourhood. Therefore, the elements determined by selections of neighbourhoods may not be as separable into the discrete objects common to the classical view of set theory. This is particularly true in working with infinite objects: it is hard to specify an infinite element completely. The theory of elements to be studied here, then, is going to permit *partial elements* as well as *total elements*, and each neighbourhood system will define a *domain* of such elements.

Since we may wish to use a neighbourhood system to introduce elements not previously investigated, the neighbourhoods do not have to be regarded as sets of the as-yet-to-be-defined objects. We can take a non-empty set Δ of *tokens* (or "traces") that function as "parts" of elements — or even as parts of "descriptions" of elements. Then a neighbourhood is a subset $X \subseteq \Delta$ containing all those tokens that provide sufficient information when taken together to "approximate" a possible element up to a certain "degree". All these words in inverted commas are vague, and in any case we shall have at the start only a *qualitative* theory of "degree of approximation". A token should be considered as a very "rough" representative of an element, and a neighbourhood should be regarded as "smoothing out" irrelevant details by grouping together *all* those representatives sharing some common feature. One neighbourhood, then,



Figure 16: Domains given by neighbourhoods.

may be only a very incomplete specification of an (ideal) element; fuller specifications can be secured by taking "convergent" sequences of neighbourhoods. Even then convergence need not be to a total element.

Let us call the family of allowed neighbourhoods $\mathcal{D}$; it is a family of subsets of the set Δ. An obvious first question is: when are two neighbourhoods $X, Y \in \mathcal{D}$ neighbourhoods of the "same" element? This question of course generalizes to a (finite) sequence of neighbourhoods. This property we will call the *consistency* of the sequence of neighbourhoods. By definition this will mean that the given neighbourhoods all contain a common neighbourhood in $\mathcal{D}$. That is, for X, Y to be consistent, there must be a $Z \in \mathcal{D}$ with $Z \subseteq X$ and $Z \subseteq Y$. This is not a very informative definition, but it has something of the flavour of a notion of consistency insofar as it can be expressed within $\mathcal{D}$. When consistency holds it seems reasonable enough at first glance to say that the intersection $X \cap Y$ is also an approximation to this common element. If this is reasonable, then $X \cap Y$ should also be regarded as a neighbourhood. This assumption has many consequences, but as a preliminary theory of approximation we will find it quite workable with many natural instances. Taking intersections just means taking more and more properties of the element and putting them together "conjunctively". It is something we do all the time. We therefore accept the idea for the present for giving our first principal definition.

3.6 Definition 1.1

3.6.1 Human-English

DEFINITION 1.1. A family $\mathcal{D}$ of subsets of a given set Δ is called a *neighbourhood system* (over Δ) iff it is a non-empty family closed under the intersection of finite consistent sequences of neighbourhoods. That is to say, $\mathcal{D}$ must fulfill these two conditions:

(i) $\Delta \in \mathcal{D}$;

(ii) whenever $X, Y, Z \in \mathcal{D}$ and $Z \subseteq X \cap Y$, then $X \cap Y \in \mathcal{D}$. □

We remark that by convention Δ corresponds to the intersection of an empty sequence of neighbourhoods; in particular, see Factoid 1.1.

3.6.2 AI: Human-English to AI-Lean

NeighborhoodSystem.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Neighbor

3.7 Factoid 1.1

3.7.1 Factoid 1.1a — empty intersection is delta

$$\bigcap_{i<n} X_i = \Delta, \text{ if } n = 0;$$

3.7.2 Factoid 1.1b — recursive finite intersection

$$= \left(\bigcap_{i<n-1} X_i \right) \cap X_{n-1}, \text{ if } n > 0.$$

Of course, from (ii), we can extend the intersection property to any finite sequence. Consequently, we can say $X_0, \ldots, X_{n-1}$ is consistent in $\mathcal{D}$ iff

$$\bigcap_{i<n} X_i \in \mathcal{D}.$$

Some examples will help us understand the notions better.

3.7.3 AI: Human-English to AI-Lean

Factoid_1_1.lean


Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Factoid_1_1.lean

3.8 Example 1.2

3.8.1 Human-English

EXAMPLE 1.2. Let $\Delta = \{0, 1\}$ and let $\mathcal{D} = \{\{0, 1\}, \{0\}, \{1\}\}$.

In pictures we have:



The intention is that 0 and 1 can be completely specified and that they can be identified with the total elements. As we shall see, there is only one partial element: either we give no information (the neighbourhood $\{0, 1\}$), or we decide between 0 and 1 (by giving $\{0\}$ or $\{1\}$). □

3.8.2 AI: Human-English to AI-Lean

Example_1_2.lean


Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Example_1_2.lean

3.9 Example 1.3

3.9.1 Human-English

EXAMPLE 1.3. Let $\Delta = \{0, 1, 2\}$ and let $\mathcal{D} = \{\{0, 1, 2\}, \{1, 2\}, \{2\}\}$.

In pictures we have:

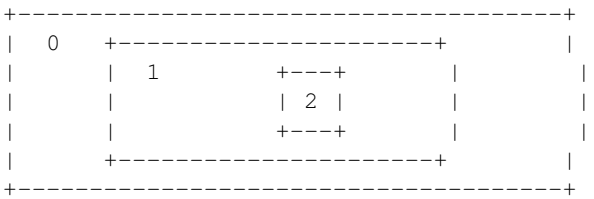

Instead of stepping to the total element (here represented by 2) in one big step, the passage is divided into two steps. (Note 0 and 1 cannot be taken as representing total elements.) This example is not very interesting because the direction of approximation is unique. We need an example with some choice. □

3.9.2 AI: Human-English to AI-Lean

Example_1_3.lean


Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Example_1_3.lean

3.10 Example 1.4

3.10.1 Human-English

EXAMPLE 1.4. Let $\Delta = \{\Lambda, 0, 1, 00, 01, 10, 11\}$ and let $\mathcal{D} = \{\Delta, \{0, 00, 01\}, \{1, 10, 11\}, \{00\}, \{01\}, \{10\}, \{11\}\}$.

Or more understandably in pictures:

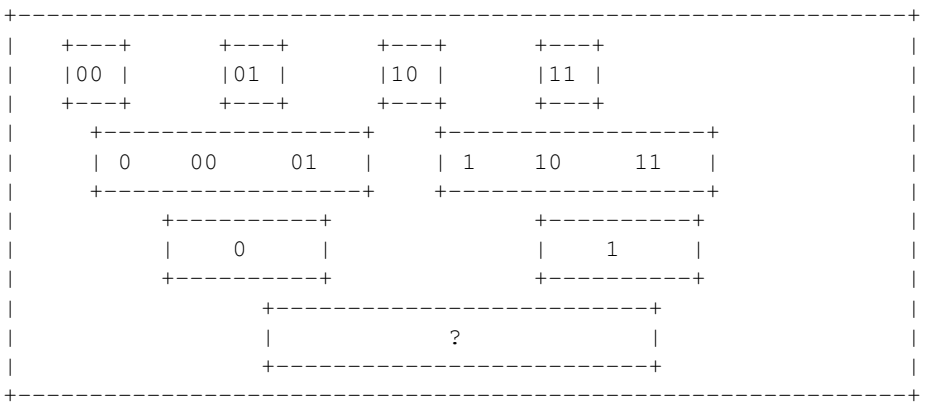

The tokens are finite sequences of 0's and 1's (up to length 2) with Λ the empty sequence; they form — in the picture — the binary tree with the sequences as the nodes. The neighbourhoods are the subtrees of all nodes above a given node. Obviously this can be generalized to sequences of any length (and to trees less regular than the binary tree). The total elements of the example correspond to the top nodes 00, 01, 10, 11 and the lower nodes to the partial elements. When we are not at a top node we have only partially determined a sequence, and the branching indicates that we have some choice as to how the sequence can be extended. □

It should be noted that, in these three examples, the reason that we have a neighbourhood system is a simple consequence of a

Resolutions from the image: "is unique" (not "in unique"); $\mathcal{D}$ begins with Δ, not Λ; Pass 1's nested-box diagram matches the neighborhood boundaries in the scan; em dashes around "in the picture" as in the source.

3.10.2 AI: Human-English to AI-Lean

Example_1_4.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Example_1_4.lean

3.11 Factoid 1.4a

3.11.1 Human-English

very special circumstance: in these systems two neighbourhoods are either disjoint or one is included in the other. This arrangement of neighbourhoods is by no means necessary.

3.11.2 AI: Human-English to AI-Lean

Factoid_1_4.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Factoid_1_4.lean

3.12 Example 1.5

3.12.1 Human-English

EXAMPLE 1.5. Let $\Delta = \{0, 1, 2, 3\}$ and let $\mathcal{D}$ be the family of all non-empty subsets of Δ.

3.12.2 AI: Human-English to AI-Lean

Example_1_5.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Example_1_5.lean

3.13 Factoid 1.5

3.13.1 Factoid 1.5a — consistent iff nonempty

This system is a direct generalization of Example 1.2., which was special owing to the small number of tokens. (The other examples were special by virtue of the choice of neighbourhoods.) The verification that the present $\mathcal{D}$ is a neighbourhood system rests on nothing more than the remark that sets are consistent in $\mathcal{D}$ iff they have a non-empty intersection. Clearly the arrangement of neighbourhoods in $\mathcal{D}$ can be as varied as a four-element set will allow; if Δ were made larger, the possible combinations of neighbourhoods could be made as complex as you wish. □

Having some idea now of the variety of neighbourhood systems, we have to discuss what it is they do. As stressed before, the tokens do not have to correspond directly to the elements; but where, we ask, do the elements come from? One obvious suggestion for determining an element is to produce a sequence of "better and better" neighbourhoods:

$$X_0 \supseteq X_1 \supseteq \cdots \supseteq X_n \supseteq \cdots$$

Trivially, any finite initial segment of this sequence is consistent, and so each X_n is a partial approximation to the "limit". If $\mathcal{D}$ were always to be taken as *finite*, of course, there would be no point in discussing limits since any such sequence would eventually be constant. The elements in the finite case would therefore be completely represented by neighbourhoods with the *minimal* neighbourhoods corresponding to the total elements. But there are many reasons to go beyond the finite (though perhaps not too far beyond).

Suppose $\langle Y_n \rangle_{n=0}^{\infty}$ is another "convergent" sequence with

$Y_{n+1} \subseteq Y_n$ for all indices: when do the two sequences of neighbourhoods determine the *same limit*? The two sequences can surely be different; for example, $\langle Y_n \rangle_{n=0}^{\infty}$ could be a subsequence of $\langle X_n \rangle_{n=0}^{\infty}$, say, $Y_n = X_{2n}$. Still we would want to say that the same limit is obtained. Without being given any further structure on the neighbourhoods, a simple answer is just to say that each sequence goes *equally deep* as the other:

for each m there is an n with $X_n \subseteq Y_m$, and

for each n there is an m with $Y_m \subseteq X_n$.

This definition obviously puts sequences into equivalence classes, and so elements could be identified with these. But such a definition is clumsy for two reasons: it is always tiresome to work with equivalence classes, and there is no reason to think that simple infinite sequences are adequate for determining elements without some rather drastic assumptions on $\mathcal{D}$. Nevertheless, the idea is *suggestive*; we just have to find some construct to represent elements in a unique way and to phrase it in a general enough manner.

Start with $\langle X_n \rangle_{n=0}^{\infty}$ again, which "converges" as before. Think of all the other sequences equivalent to this one in the sense just defined. We can define the class of all terms of all such sequences very easily as being the family:

$$x = \{Z \in \mathcal{D} \mid X_n \subseteq Z \text{ for some } n\}.$$

3.13.2 Factoid 1.5b — equivalent sequences same limit

It is easy to prove that if we form the analogous class for $\langle Y_n \rangle_{n=0}^{\infty}$, then the two families are *equal* if and only if the sequences are *equivalent*. Thus, we seem justified in letting x represent the limit of $\langle X_n \rangle_{n=0}^{\infty}$. All we have to do now is to remark on what sort of class x is as a subfamily of $\mathcal{D}$; what we abstract from the construction, however, will be just a bit more general than taking those x that result from sequences.

3.13.3 AI: Human-English to AI-Lean

Factoid_1_5.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Factoid_1_5.lean

3.14 Definition 1.6

3.14.1 Human-English

DEFINITION 1.6. The (ideal) elements of a neighbourhood system $\mathcal{D}$ are those subfamilies $x \subseteq \mathcal{D}$ where:

(i) $\Delta \in x$;

(ii) $X, Y \in x$ always implies $X \cap Y \in x$; and

(iii) whenever $X \in x$ and $X \subseteq Y \in \mathcal{D}$, then $Y \in x$.

The *domain* of all such elements is written as $|\mathcal{D}|$. □

The idea of 1.6 is a well-known mathematical device: the families x satisfying (i)–(iii) are usually called *filters*. Most frequently the emphasis is put on the *maximal* filters, and these would be our *total* elements; however, in general, the proof that maximal filters exist is non-constructive, so for our purposes it is better not to neglect the partial filters. When maximal filters can be found, well and good, but we do not have

to insist on them. Note that the generality of 1.6 is achieved by not requiring that there is a sequence of neighbourhoods that "generates" the filter x. (See Exercise 1.22.)

We have often said that neighbourhoods determine partial elements by themselves; we now make this remark precise.

3.14.2 AI: Human-English to AI-Lean

Element.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Element.

3.15 Definition 1.7

3.15.1 Human-English

DEFINITION 1.7. For $X \in \mathcal{D}$, the *principal filter* determined by X is defined by:

$$\uparrow X = \{Y \in \mathcal{D} \mid X \subseteq Y\}.$$

The principal filters form what we shall call the *finite elements* of the domain $|\mathcal{D}|$. □

3.15.2 AI: Human-English to AI-Lean

principal.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/principa

3.16 Factoid 1.7

3.16.1 Factoid 1.7a1 — principals are one-one

It is obvious that the correspondence between X and $\uparrow X$ is one-one and inclusion *reversing*, in the sense that

3.16.2 Factoid 1.7a2 — inclusion-reversing principals

$$X \subseteq Y \quad \text{iff} \quad \uparrow Y \subseteq \uparrow X$$

for all $X, Y \in \mathcal{D}$. But, except in very special cases, there is much more to $|\mathcal{D}|$ than just the finite elements. Much of our investigation will be concerned with finding out how much more. The finite elements are, in a certain sense, "dense" in $|\mathcal{D}|$, however, because it is also obvious from the definitions that for each $x \in |\mathcal{D}|$

3.16.3 Factoid 1.7b — union of principal filters

$$x = \bigcup \{\uparrow X \mid X \in x\}.$$

That is, every element is a certain type of "limit" of finite elements. (This statement is made more precise in Exercise 1.21)

We note that we have now had several occasions to use inclusion relationships between elements; this is an important relationship, and we give it a special name.

3.16.4 AI: Human-English to AI-Lean

Factoid_1_7.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Factoid_1_7.lean

3.17 Definition 1.8

3.17.1 Human-English

DEFINITION 1.8. For $x, y \in |\mathcal{D}|$, we say that x *approximates* y iff $x \subseteq y$. The element that approximates all others, $\{\Delta\}$, is called $\perp$ (read: *bottom*); it is the "least defined" element, or the "most partial" element. Elements maximal with respect to the approximation relation are called *total elements*. □

3.17.2 AI: Human-English to AI-Lean

bot.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/bot.lean

3.18 Factoid 1.8

3.18.1 Factoid 1.8a1 — bottom element

DEFINITION 1.8. For $x, y \in |\mathcal{D}|$, we say that x *approximates* y iff $x \subseteq y$. The element that approximates all others, $\{\Delta\}$, is called $\perp$ (read: *bottom*); it is the "least defined" element, or the "most partial" element. Elements maximal with respect to the approximation relation are called *total elements*. □

3.18.2 Factoid 1.8a2 — bottom is least

DEFINITION 1.8. For $x, y \in |\mathcal{D}|$, we say that x *approximates* y iff $x \subseteq y$. The element that approximates all others, $\{\Delta\}$, is called $\perp$ (read: *bottom*); it is the "least defined" element, or the "most partial" element. Elements maximal with respect to the approximation relation are called *total elements*. □

3.18.3 Factoid 1.8b — finite filters are principal

EXAMPLES 1.2 – 1.5 (Revisited). The examples as given were all finite, so any explicitly given filter x is principal, the element is finite, the minimal $X \in x$ tells us all we need to know. In such simple situations there is essentially no difference between elements and neighbourhoods — except for the reversal of the order as noted. This (necessary) reversal should not, however, become a matter of confusion: the smaller the neighbourhood has become, the more it has "converged", and so the better defined the element has become. In the approximation relation the "poorer" elements are placed below the "better" with the total up at the top. This will become clearer in discussing "infinite" elements.

Example 1.3 will be generalized in Exercise 1.12. Let us here generalize first 1.4. We let

$$\Delta = \Sigma^*,$$

where $\Sigma = \{0, 1\}$ and Σ^* means the set of all finite sequences of 0's and 1's, with Λ being the empty sequence. We write $\sigma\tau$ for the *concatenation* or *juxtaposition* of two sequences $\sigma, \tau \in \Sigma^*$. Define

$$B = \{\sigma\Sigma^* \mid \sigma \in \Sigma^*\}, \text{ where}$$

$$\sigma X = \{\sigma\tau \mid \tau \in X\},$$

for an arbitrary set $X \subseteq \Sigma^*$. In other words, a neighbourhood in B consists of all *extensions* of a given sequence σ. (Refer back to the finite version of 1.4.) We use the letter "B" to remind us of "binary", and this is an example we shall refer to many times. The proof (if it is not obvious) that B is a neighbourhood system should be done as an exercise.

What do we find in $|B|$? Of course $\perp = \{\Delta\} \in |B|$. For any $x \in |B|$ and $\sigma \in \Sigma^*$ define

$$\sigma x = \{Y \mid \sigma X \subseteq Y \text{ some } X \in x\}.$$

3.18.4 Factoid 1.8c — prefix order

Again there is an exercise here to show $\sigma x \in |B|$. In particular $\sigma \perp \in |B|$ for all $\sigma \in \Sigma^*$, and these are just the finite elements. The minimal element of $\sigma \perp$ is $\sigma\Delta$. Note that $\sigma_0 \perp \subseteq \sigma_1 \perp$ if and only if σ_0 is an *initial segment* of the sequence σ_1.

If now $x \in |B|$ is any explicitly given element (that is, if we know for any $X \in B$ whether or not $X \in x$), we have but to work out from these definitions that

3.18.5 Factoid 1.8d — union of finite approximations

$$x = \bigcup_{n=0}^{\infty} \sigma_n \perp,$$

where the $\sigma_n \in \Sigma^*$ and each σ_n is an initial segment of the next σ_{n+1}. *In general, in any domain, an element is uniquely determined by its finite approximations, and we are just making this explicit in* $|B|$. When we have complete knowledge of x, then there are two cases: either the approximations $\sigma_n \perp$ become constant from some point on (where $n > n_0$), or not. In the first case x is finite and equal to $\sigma_{n_0} \perp$; in the second case x is infinite and the σ_n fill out an infinite (one-way) sequence.

The generalization of 1.5 to the infinite case where $\Delta = \mathbf{N} = \{0, 1, 2, 3, \ldots, n, \ldots\}$ can be made in more than one way: for instance either we use as neighbourhoods *all* non-empty subsets of Δ or just those omitting but a finite number of integers. And, as will become apparent, there are other choices giving domains of quite different characters. □

Many constructions (choices of $\mathcal{D}$) lead to the "same" domain; "sameness" is an important notion and it is to be defined in terms of "isomorphism", which in turn is to be defined in terms of approximation preserving correspondences.

3.18.6 AI: Human-English to AI-Lean

`Factoid_1_8.lean`

Lean source: `DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Factoid_1_8.lean`

3.19 Examples 1.2–1.5 (Revisited)

3.19.1 Human-English

EXAMPLES 1.2 – 1.5 (Revisited). The examples as given were all finite, so any explicitly given filter x is principal, the element is finite, the minimal $X \in x$ tells us all we need to know. In such simple situations there is essentially no difference between elements and neighbourhoods — except for the reversal of the order as noted. This (necessary) reversal should not, however, become a matter of confusion: the smaller the neighbourhood has become, the more it has "converged", and so the better defined the element has become. In the approximation relation the "poorer" elements are placed below the "better" with the total up at the top. This will become clearer in discussing "infinite" elements.

Example 1.3 will be generalized in Exercise 1.12. Let us here generalize first 1.4. We let

$$\Delta = \Sigma^*,$$

where $\Sigma = \{0, 1\}$ and Σ^* means the set of all finite sequences of 0's and 1's, with Λ being the empty sequence. We write $\sigma\tau$ for the *concatenation* or *juxtaposition* of two sequences $\sigma, \tau \in \Sigma^*$. Define

$$B = \{\sigma\Sigma^* \mid \sigma \in \Sigma^*\}, \text{ where}$$

$$\sigma X = \{\sigma\tau \mid \tau \in X\},$$

for an arbitrary set $X \subseteq \Sigma^*$. In other words, a neighbourhood in B consists of all *extensions* of a given sequence σ. (Refer back to the finite version of 1.4.) We use the letter "B" to remind us of "binary", and this is an example we shall refer to many times. The proof (if it is not obvious) that B is a neighbourhood system should be done as an exercise.

What do we find in $|B|$? Of course $\perp = \{\Delta\} \in |B|$. For any $x \in |B|$ and $\sigma \in \Sigma^*$ define

$$\sigma x = \{Y \mid \sigma X \subseteq Y \text{ some } X \in x\}.$$

3.19.2 AI: Human-English to AI-Lean

Examples_1_2_1_5_revisited.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Examples_1_2_1_5_revisited.lean

3.20 Definition 1.9

3.20.1 Human-English

DEFINITION 1.9. Two neighbourhood systems $\mathcal{D}_0$ and $\mathcal{D}_1$ determine *isomorphic domains* iff there is a one-one correspondence between $|\mathcal{D}_0|$ and $|\mathcal{D}_1|$ which preserves inclusion between the elements of the domains. In symbols we write $\mathcal{D}_0 \cong \mathcal{D}_1$. □

It is certain that the property of 1.9 is necessary, but it may not be so clear that it is sufficient. We shall in fact prove in the next lecture that an isomorphism between domains always maps finite elements to finite elements, so it always results from a one-one inclusion-preserving correspondence between neighbourhoods. This is surely as strong as could be hoped. This general result is not needed to see that particular domains are isomorphic.

In some of the examples tokens corresponded to total elements and in some to partial elements; it is not difficult to see (ex post facto) that every domain can be presented with tokens exactly corresponding to partial elements.

3.20.2 AI: Human-English to AI-Lean

DomainIso.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/DomainIs

3.21 Theorem 1.10

3.21.1 Human-English

THEOREM 1.10. Given any neighbourhood system $\mathcal{D}$, define for $X \in \mathcal{D}$

$$[X] = \{x \in |\mathcal{D}| \mid X \in x\}.$$

The subsets $[X] \subseteq |\mathcal{D}|$ for $X \in \mathcal{D}$ form a neighbourhood system over $|\mathcal{D}|$ which determines a domain isomorphic to $|\mathcal{D}|$.

Proof: We note first that

(1) $[\Delta] = |\mathcal{D}|$.

Next note that

(2) X, Y are consistent in $\mathcal{D}$ iff $[X] \cap [Y] \neq \emptyset$;

and that for $X, Y \in \mathcal{D}$

(3) $[X] \cap [Y] = [X \cap Y]$ if $X \cap Y \in \mathcal{D}$.

Inasmuch as

(4) $\uparrow X \in [X]$ for all $X \in \mathcal{D}$,

it easily follows that $\mathcal{D}$ and the family

$$\{[X] \mid X \in \mathcal{D}\}$$

are in a one-one, inclusion-preserving correspondence. Thus, we can induce the desired one-one correspondence between the elements of the two systems. □

The import of 1.10 is that the original tokens in Δ can be replaced by the elements of $|\mathcal{D}|$. This process replaces the neighbourhood $X \subseteq \Delta$ by the subset $[X] \subseteq |\mathcal{D}|$. As the passage is inclusion preserving, the domain has not really changed, only its presentation. Though of some theoretical charm, the theorem is not of much use since we still have to get $\mathcal{D}$ from somewhere. It does emphasize, though, that the rôle of the tokens is simply to keep the inclusions (and intersections) of neighbourhoods sorted out. It is *not* always true that the tokens can be identified with the total elements.

The last theorem in this lecture is a result on *closure properties* of a domain with respect to set-theoretical operations which have interesting meanings with respect to approximation.

3.21.2 AI: Human-English to AI-Lean

Theorem_1_10.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Theorem_1_10.lean

3.22 Theorem 1.11

3.22.1 Human-English

THEOREM 1.11. If $\mathcal{D}$ is a neighbourhood system and $x_n \in |\mathcal{D}|$ for $n = 0, 1, 2, \ldots$, then

(i) $\bigcap_{n=0}^{\infty} x_n \in |\mathcal{D}|$; and

(ii) $\bigcup_{n=0}^{\infty} x_n \in |\mathcal{D}|$, provided

$$x_0 \subseteq x_1 \subseteq x_2 \subseteq \cdots \subseteq x_n \subseteq x_{n+1} \subseteq \cdots .$$


Proof: The conditions of 1.6 have to be checked. For the case of intersection, all of 1.6(i)–(iii) are quite obvious. For the case of union, only 1.6(ii) gives pause and it requires the proviso. If X and Y belong to the union, then $X \in x_n$, say, and $Y \in x_m$. But, either $n < m$ or $m < n$, and if $k = \max(n, m)$, then $X, Y \in x_k$. Since $x_k \in |\mathcal{D}|$, we have $X \cap Y \in x_k$; thus, $X \cap Y$ belongs to the union. This proves (ii). □

In words, the intersection is the best element that is at the same time an approximation to all of the elements x_n; the intersection is exactly what is common to all the given elements. The union on the other hand is just what the (increas-

The union on the other hand is just what the (increasing sequence of the) x_n approximates; the union combines contributions from all the x_n into a "better" element – but no more than that.


In thinking about domains a rough diagram of the partial-ordering relation $\subseteq$ between elements is often helpful. The picture of 1.4 is an example where the nodes represent the elements. Any finite tree growing up from a root node would also be an example. Indeed, any finite partially ordered set with least element would be an example. (Here no distinction between tokens and elements is necessary.) A lattice diagram is also illustrated.

A TREE




A ROUGH PICTURE





A LATTICE



The root node is the element $\perp$ of $|\mathcal{D}|$; there need be no top node $\top$. *Approximation* is represented by a passage from a lower node to a higher node along the rising lines. The system $\mathcal{D}$ of neighbourhoods is the collection of sets each of which is all

the nodes above a given node. For infinite examples, however, care must be given to introduce limit nodes. The first few exercises should be provided with pictures to illustrate the structure.

3.22.2 AI: Human-English to AI-Lean

Theorem_1_11.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Theorem_1_11.lean

3.23 Exercise 1.12

3.23.1 Human-English

EXERCISE 1.12. Let $\Delta = \mathbb{N} = \{0, 1, 2, \ldots, n, \ldots\}$ be the set of non-negative integers. Use as neighbourhoods final segments:

$$\{m \in \mathbb{N} \mid m > n\}$$

for $n \in \mathbb{N}$. Verify that this is a neighbourhood system. What are the total elements? What are the finite elements? Draw a picture of the approximation relation in this domain. (Hint: there is only one limit element.)

3.23.2 AI: Human-English to AI-Lean

Exercise_1_12.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise_1_12.lean

3.24 Exercise 1.13

3.24.1 Human-English

EXERCISE 1.13. Verify all the assertions made about the system B defined as the infinite generalization of Example 1.4. Draw a picture similar to that given in the text which includes nodes for all $\sigma \in \Sigma^*$. Show the neighbourhoods, how the approximation relation behaves, and where the total elements lie. (The picture is closely related to the "binary tree", but has to have limit nodes all along the top.)

3.24.2 AI: Human-English to AI-Lean

Exercise_1_13.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise 1_13.lean

3.25 Exercise 1.14

3.25.1 Human-English

EXERCISE 1.14. Let $\Delta = \mathbb{N}$ and let $\mathcal{V}$ be the family of finite non-empty subsets of Δ plus the set Δ. Show that this is a neighbourhood system. What are the total elements? What are the finite elements? Draw a picture.

3.25.2 AI: Human-English to AI-Lean

Exercise_1_14.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise 1_14.lean

3.26 Exercise 1.15

3.26.1 Human-English

EXERCISE 1.15. Construct non-isomorphic infinite domains where all elements are finite but where there are no infinite chains $\langle x_n \rangle_{n=0}^{\infty}$ of elements with $x_n \sqsubseteq x_{n+1}$ but $x_n \neq x_{n+1}$ for all n.

3.26.2 AI: Human-English to AI-Lean

Exercise_1_15.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise 1_15.lean

3.27 Exercise 1.16

3.27.1 Human-English

EXERCISE 1.16. Let $\Delta = \mathbf{N}$ and let $\mathcal{D}$ be the family of *cofinite* subsets of $\mathbf{N}$. Show that $|\mathcal{D}|$ is isomorphic to the partially ordered set of *all* subsets of $\mathbf{N}$ under inclusion. Construct some other neighbourhood systems where $\mathcal{D}$ is closed under finite intersection. What happens to the total elements in such systems?

3.27.2 AI: Human-English to AI-Lean

Exercise_1_16.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise 1_16.lean

3.28 Exercise 1.17

3.28.1 Human-English

EXERCISE 1.17. Let $\Delta = \mathbf{R}$ be the real line. Let $\mathcal{D}$ be the set of non-empty open intervals with rational end points plus the set Δ. Show that this is a neighbourhood system. For any real $t \in \mathbf{R}$, show that $\{X \in \mathcal{D} \mid t \in X\}$ is a filter. Is it always total? What are the total elements of $|\mathcal{D}|$? (Hint: When t is rational consider all intervals with t as a right-hand end point.)

3.28.2 AI: Human-English to AI-Lean

Exercise_1_17.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise 1_17.lean

3.29 Exercise 1.18

3.29.1 Human-English

EXERCISE 1.18. Let $\mathcal{D}$ be a neighbourhood system. Call a subset $C \subseteq \mathcal{D}$ *consistent* iff every finite subset of C is consistent in $\mathcal{D}$. Give an example where C is a subset with more than two elements, every pair of neighbourhoods in C is consistent, but C is *not* consistent. Show that if C is consistent, then there is a *least* filter $x \in |\mathcal{D}|$ with $C \subseteq x$. Show generally that the *intersection* of any non-empty collection of filters is again a filter.

3.29.2 AI: Human-English to AI-Lean

Exercise_1_18.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise 1_18.lean

3.30 Exercise 1.19

3.30.1 Human-English

EXERCISE 1.19. Define a *positive neighbourhood system* to be a family $\mathcal{D}$ where (ii) of 1.1 is replaced by **(ii')** whenever $X, Y \in \mathcal{D}$, then $X \cap Y \neq \emptyset$ iff $X \cap Y \in \mathcal{D}$. Prove that a positive neighbourhood system is indeed a neighbourhood system in the sense of the earlier definition. Give an example of a neighbourhood system that is *not* positive. (Hint: (suggested by C.A.R. Hoare). Let $\Delta = \mathbf{N} \times \mathbf{N}$, in the plane. Let $\mathcal{D}$ be the family of subsets $X \subseteq \mathbf{N} \times \mathbf{N}$ where all but a finite number of places the *vertical* sections of X are the whole of $\mathbf{N}$ but at the other places the sections are finite and nonempty. Smaller examples are of course possible.)

3.30.2 AI: Human-English to AI-Lean

Exercise_1_19.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise 1_19.lean

3.31 Exercise 1.20

3.31.1 Human-English

EXERCISE 1.20. Let $\mathcal{D}$ be any neighbourhood system over a set Δ. Let $\Delta' = \mathcal{D}$ and define

$$\mathcal{D}' = \{\uparrow X \mid X \in \mathcal{D}\},$$

where

$$\uparrow X = \{Y \in \mathcal{D} \mid Y \subseteq X\}.$$

Show that $\mathcal{D}'$ is a positive neighbourhood system and that $|\mathcal{D}|$ and $|\mathcal{D}'|$ are isomorphic. Note that for $\mathcal{D}'$ finite elements and tokens are in a one-one correspondence.

3.31.2 AI: Human-English to AI-Lean

Exercise_1_20.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise 1_20.lean

3.32 Exercise 1.21

3.32.1 Human-English

EXERCISE 1.21. Work out in greater detail the proof of 1.10. Remark that the neighbourhood system over $|\mathcal{D}|$ so constructed is positive, thereby obtaining in a different way the same kind of conclusion as in 1.20. Show also that the system over $|\mathcal{D}|$ is complete in the sense that every filter is fixed by a unique member of the underlying set. (A filter is *fixed by a point* iff it is the filter of *all* neighbourhoods containing that point.) Remark that a complete system is one where tokens and (partial) elements can always be identified (under a suitable one-one correspondence). Show also that consistency of a set $\{X_i \mid i < n\}$ of neighbourhoods in $\mathcal{D}$ is equivalent to saying

$$\bigcap_{i<n} [X_i] \neq \emptyset.$$

3.32.2 AI: Human-English to AI-Lean

Exercise_1_21.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise 1_21.lean

3.33 Exercise 1.22

3.33.1 Human-English

EXERCISE 1.22. (For topologists). Show that the neighbourhoods $[X]$ for $X \in \mathcal{D}$ make $|\mathcal{D}|$ into a topological space where the open subsets $\mathcal{U} \subseteq |\mathcal{D}|$ can be characterized by the following two conditions:

(i) whenever $x \in \mathcal{U}$ and $x \sqsubseteq y \in |\mathcal{D}|$, then $y \in \mathcal{U}$; and

(ii) whenever $x \in \mathcal{U}$, then $[X] \in \mathcal{U}$ for some $X \in x$.

Prove also that the inclusion relation on $|\mathcal{D}|$ can be defined topologically as:

(iii) $x \sqsubseteq y$ iff for all open $\mathcal{U} \subseteq |\mathcal{D}|$, if $x \in \mathcal{U}$ then $y \in \mathcal{U}$.

Is $|D|$ ever a Hausdorff space?
Show that if $(x_n)_{n=0}^{\infty}$ is a sequence of elements of $|D|$ with $x_n \subseteq x_{n+1}$ for all n, then

$$\bigcup_{n=0}^{\infty} x_n$$

is not only in $|D|$ but is a topological limit point of the sequence. Show that any element x is a limit point of the set $\{\uparrow X \mid X \in x\}$. Are there other limit points?

3.33.2 AI: Human-English to AI-Lean

Exercise_1_22.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise 1_22.lean

3.34 Exercise 1.23

3.34.1 Human-English

EXERCISE 1.23. Suppose that the neighbourhood system D is countable, say,

$$D = \{X_0, X_1, X_2, \ldots, X_n, \ldots\}.$$

Suppose further that the property of consistency of finite sequences of neighbourhoods is decidable (or "effectively known"). Then the following sequence is well defined:

$$\begin{aligned} Y_0 &= X_0 \\ Y_{n+1} &= X_{n+1}, \text{ if this set is consistent with } Y_0, Y_1, \ldots, Y_n; \\ &= Y_n, \text{ if not.} \end{aligned}$$

Show that $\{Y_0, Y_1, \ldots, Y_n, \ldots\}$ is a total element of $|D|$. (Hint: Show first that $Y_0, Y_1, \ldots, Y_{n-1}$ is consistent for all n.) In such a system show that all filters can be determined by sequences.

3.34.2 AI: Human-English to AI-Lean

Exercise_1_23.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise 1_23.lean

3.35 Exercise 1.24

3.35.1 Human-English

EXERCISE 1.24. (For set theorists). Prove, using the Axiom of Choice, or some equivalent principle, that in every domain a partial element can always be extended to a total element. Is this assertion equivalent to the Axiom of Choice? (Hint: Remember to prove that the union of every (transfinite) chain of filters is again a filter.)

3.35.2 AI: Human-English to AI-Lean

Exercise_1_24.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise 1_24.lean

3.36 Exercise 1.25

3.36.1 Human-English

EXERCISE 1.25. (For set theorists). Let Δ be any well-ordered set (ordinal). (Even small ordinals like $\omega \cdot 3$ or ω^5 are interesting.) Let $\mathcal{D}$ be the family of non-empty *final* segments of Δ. What is $|\mathcal{D}|$? Are all elements finite? Is every approximation to a finite element finite?

3.36.2 AI: Human-English to AI-Lean

Exercise_1_25.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise 1_25.lean

3.37 Exercise 1.26

3.37.1 Human-English

EXERCISE 1.26. (For algebraists). Let A be a commutative ring with unit. Let Δ be the set of finite subsets $F \subseteq A$. Define

$$I(F) = \{G \in \Delta \mid F \subseteq \text{the ideal generated by } G\}.$$

Prove that the sets of the form $I(F)$ form a neighbourhood system, and that the corresponding domain is isomorphic to the set of ring-theoretic ideals of A partially ordered by inclusion. What would happen if we excluded from Δ all F with $I(F) = I(\{1\})$, where 1 is the unit of A?

3.37.2 AI: Human-English to AI-Lean

Exercise_1_26.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise 1_26.lean

3.38 Exercise 1.27

3.38.1 Human-English

EXERCISE 1.27. Further closure properties of domains can be proved for bounded sets. We say $X \subseteq |\mathcal{D}|$ is *bounded* iff for some $y \in |\mathcal{D}|$ we have $x \subseteq y$ for all $x \in X$. This y is called an *upper bound*. We let

$$\bigsqcup X = \bigcap \{y \in |\mathcal{D}| \mid x \subseteq y \text{ all } x \in X\}.$$

Prove that if X is bounded, then $\bigsqcup X$ is the *least upper bound* for X in $|\mathcal{D}|$. Prove also: if $U, V \in \mathcal{D}$ are neighbourhoods, then $\{U, V\}$ is consistent in $\mathcal{D}$ iff $\{\uparrow U, \uparrow V\}$ is bounded in $|\mathcal{D}|$. (That is, boundedness is for elements what consistency is for neighbourhoods.) Prove finally with the aid of 1.18 that $X \subseteq |\mathcal{D}|$ is bounded iff every finite subset of X is bounded.

3.38.2 AI: Human-English to AI-Lean

Exercise_1_27.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainsGivenByNeighbourhoods/Exercise 1_27.lean

3.39 Mappings between domains

Dependency diagram. Each box is one item. The arrowhead is on the item that imports. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it is not shown. Blue is a definition, green a proposition, amber an example, red a theorem, and indigo an exercise.

3.40 Introduction

3.40.1 Human-English

3.41 LECTURE II

MAPPINGS BETWEEN DOMAINS

The elements of a domain are regarded as being specified by approximations: the neighbourhoods. With the idea of approximation as the dominant notion, therefore, it is natural to look for a concept of mapping (transformation of domains) that in some suitable sense preserves the spirit of the approximations. In a 'theory of computability,' where the (finite) approximations to the elements are all we can ever know at one time, the only mappings that can be computed are those that proceed by approximation, somehow passing from the neighbourhoods of one domain over to the neighbourhoods of the other.

Suppose $X \in \mathcal{D}_0$ is given - it is an approximation to certain elements of $|\mathcal{D}_0|$. (More precisely $\uparrow X$ is the approximation in the domain, but it is easier to speak of the neighbourhood X.) What can be said about the approximations of the images of these elements under the mapping we will call f? If X is not a very sharp approximation, then not very much can be said about the image in the other domain $|\mathcal{D}_1|$. Trivially, of

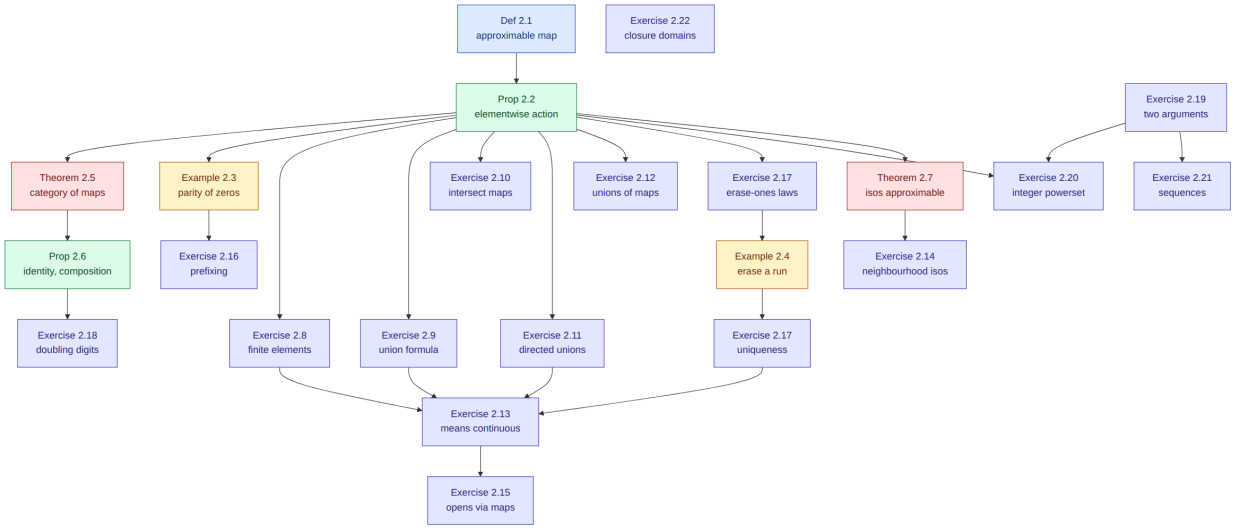


Figure 17: Mappings between domains.

course, we can say that Δ_1 is an approximation - because it approximates everything in its domain. Suppose, however, that we could say more. Suppose we could say that both Y and Y' approximate the image of X. If the mapping f is coherent, then it is reasonable to suppose that such a statement would imply that Y and Y' are *consistent* in $\mathcal{D}_1$. But if this is so, then since the two neighbourhoods are meant to cluster around the same images, we can feel some confidence in saying that $Y \cap Y'$ approximates these images. In other words to specify f we do not supply a unique image of X, but we say which of the $Y \in \mathcal{D}_1$ approximate the (ideal) image. To make this idea work a *monotonicity condition* is also needed since we are trying to express the idea that "if we give at least X as an approximate input to f, then we can expect at least Y as output." Thus, a mapping is taken as a kind of relation between neighbourhoods.

3.42 Definition 2.1

3.42.1 Human-English

DEFINITION 2.1. An *approximable mapping* $f : D_0 \to D_1$ between domains is a binary relation $f \subseteq D_0 \times D_1$ between neighbourhoods such that

(i) $\Delta_0 f \Delta_1$;

(ii) $X f Y$ and $X f Y'$ always imply $X f (Y \cap Y')$;

(iii) $X f Y$, $X' \subseteq X$, and $Y \subseteq Y'$ always imply $X' f Y'$. □

Condition (i) we have already discussed; in a sense it means "ask me no questions and I shall tell you no lies." In other words "zero input can expect at least zero output." The other conditions are compatible with having

$$f = \{\langle X, \Delta_1 \rangle \mid X \in D_0\};$$

that is, f might be the least informative relation and nothing more. But if it is more, then (ii) is, as we explained, a consistency condition. To explain monotonicity in (iii), suppose a mapping relationship is already known, XfY, say. If we *improve* the accuracy of X to $X' \subseteq X$ and if we *degrade* the accuracy of Y to $Y' \supseteq Y$, then we can still assert $X'fY'$ since this relationship is *less informative* than the former relationship, which was already known. Thus, we see that conditions (i)–(iii) are all reasonably argued as necessary.

One indication that the conditions of 2.1 are sufficient for a definition is that they are exactly what we need to show that f as a neighbourhood relation determines an equivalent elementwise mapping from $|D_0|$ into $|D_1|$. (Owing to the equivalence, we use the same symbol f for both.)

3.42.2 AI: Human-English to AI-Lean

Definition_2_1.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Definition_2_1.lean

3.43 Proposition 2.2

3.43.1 Human-English

PROPOSITION 2.2. Given neighbourhood systems D_0 and D_1, an approximable mapping $f : D_0 \to D_1$ always determines a function $f : |D_0| \to |D_1|$ between domains by virtue of the formula:

(i) $f(x) = \{Y \in D_1 \mid \exists X \in x.\ XfY\}$

for all $x \in |D_0|$. Conversely, this function uniquely determines
the original relation by the equivalence:

(ii) XfY iff $Y \in f(\uparrow X)$

for all $X \in D_0$ and $Y \in D_1$. Approximable functions are always monotone in the following sense:

(iii) $x \subseteq y$ always implies $f(x) \subseteq f(y)$,

for $x, y \in |D_0|$; moreover two approximable functions $f : D_0 \to D_1$ and $g : D_0 \to D_1$ are identical as relations iff

(iv) $f(x) = g(x)$, for all $x \in |D_0|$.

Proof: The argument that formula (i) always gives us $f(x) \in |D_1|$ when $x \in |D_0|$ can be safely left to the reader. Note, however, that all the conditions of 2.1 are required to show this. As for (ii), the implication from left to right follows directly from (i) because $X \in\uparrow X$. In the other direction $Y \in f(\uparrow X)$ means that ZfY holds for some $Z \in\uparrow X$. But from $X \subseteq Z$ it follows that XfY, as we wished.

To prove monotonicity, assume $x \subseteq y$. Now $X \in x$ and XfY always imply $X \in y$ and XfY. This means $Y \in f(x)$ always implies $Y \in f(y)$; that is, $f(x) \subseteq f(y)$.

Finally, to check that (iv) means $f = g$ as relations, all that has to be remarked that this follows from formulae (i) and (ii). □

Note that the right-hand side of (ii) can be written:

$$\uparrow Y \subseteq f(\uparrow X),$$

which can be read as saying that the partial element determined by the neighbourhood Y approximates the function value at the element determined by X. This precise relationship of course fits the informal discussion of mapping given earlier. Indeed whenever $x \in [X]$ and $X\,f\,Y$ hold, then $f(x) \in [Y]$ always follows, which is another way to construe the mapping character of f. Some examples of mappings are now called for.

3.43.2 AI: Human-English to AI-Lean

Proposition_2_2.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Proposition_2_2.lean

3.44 Example 2.3

3.44.1 Human-English

EXAMPLE 2.3. Let T be the neighbourhood system of the two-token domain of Example 1.2. To avoid confusion with some other domains, we will call the two total elements of $|T|$ respectively true and false. There is only one other finite element here, namely $\perp$= undefined. We often use these elements as indicators of results: true indicates a positive outcome; false, a negative outcome; and $\perp$ indicates that there is not enough information to decide the outcome totally.

Let B be the system for the binary tree as in the last chapter. What we wish to define is an approximable mapping $f : B \to T$. The intuitive idea of the mapping we have in mind is that the binary sequence is being read from left to right, and we are counting the number of 0's seen before the first 1 is encountered. We then test the parity of this count; if it is even, the output is true; if not, false. Using a suggestive informal notation with three dots, some results of the function that does the counting and testing can be written as:

$$\begin{aligned} f(0000101\ldots) &= \text{true} \\ f(1101110\ldots) &= \text{true} \\ f(0111011\ldots) &= \text{false} \\ f(0000000\ldots) &= \perp . \end{aligned}$$

The last equation is necessary, because 0000000 as a partial element cannot be counted as either even or odd since it can have inconsistent extensions:

$$\begin{aligned} &0000000\ \perp \sqsubseteq 00000001\ \perp \\ &0000000\ \perp \sqsubseteq 000000000001\ \perp . \end{aligned}$$

So, as far as f is concerned, a plain string of 0's is indefinite. The same answer holds if the 0's go on infinitely.

To be more precise we want

$$\begin{aligned} f(0^n 1\ \perp) &= \text{true} \quad \text{if } n \text{ is even;} \\ &= \text{false} \quad \text{if } n \text{ is odd.} \end{aligned}$$

As a binary relation $f \subseteq B \times T$ we will have

$X f Y$ iff $Y \in \perp$ or $X \sqsubseteq 0^n 1\Delta$ for some $n \in \mathbf{N}$ and either n is even and $Y \in$ true or n is odd and $Y \in$ false.

It should be checked that 2.1(i)–(ii) are satisfied. □

3.44.2 AI: Human-English to AI-Lean

Example_2_3.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Example_2_3.lean

3.45 Example 2.4

3.45.1 Human-English

EXAMPLE 2.4. Let us briefly describe an approximable mapping $g : B \to B$. Informally, g can be said to "read a sequence from left to right and eliminate the first consecutive run of 1's while copying all the other digits as read." We will have

$$g(0^n 1^k 0x) = 0^{n+1}x$$

provided $k > 0$. (Here 1^k means a string of 1's of length k.) However, if 1^∞ is the infinite sequences of 1's, then

$$g(1^\infty) = \perp, \text{ and}$$
$$g(0^n 1^\infty) = 0^n.$$

This example is instructive, since it shows that a non-trivial mapping can transform a total element into a partial element. □

Aside from our being able to define particular functions outright, we can combine functions in many different ways; the idea of composition is probably the most basic scheme of combination, and there is a technical name for a family of structures with mappings that can be so combined.

3.45.2 AI: Human-English to AI-Lean

Example_2_4.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Example_2_4.lean

3.46 Theorem 2.5

3.46.1 Human-English

THEOREM 2.5. The class of neighbourhood systems and approximable mappings form a *category*, where the identity mapping $I_D : D \to D$ relates $X, Y \in D$ as follows:

(i) $X\ I_D\ Y$ iff $X \subseteq Y$.

If $f : D_0 \to D_1$ and $g : D_1 \to D_2$ are given, then the *composition* $g \circ f : D_0 \to D_2$ relates $X \in D_0$ and $Z \in D_2$ as follows:

(ii) $X\ g \circ f\ Z$ iff $\exists Y \in D_1.\ X\ f\ Y$ and $Y\ g\ Z$.

Proof: (We may use MacLane [1971] as the standard reference on category theory, but we require hardly more than the basic definitions at this stage.) To check that we have a category, we need to know that the identity and composition maps really are maps in the category and that certain identity and associative laws hold. Now it is obvious that I_D satisfies 2.1 (i)-(iii). Moreover if $f : D_0 \to D_1$, all we have to prove is:

$$f \circ I_{D_0} = I_{D_1} \circ f = f$$

Checking one of these equations is enough. Thus, for $X \in D_0$ and $Z \in D_1$ we find

$$\begin{aligned} X\ f \circ I_{D_0}\ Z &\text{ iff } \exists Y \in D_0.\ X \subseteq Y \text{ and } Y\ f\ Z \\ &\text{iff } X\ f\ Z. \end{aligned}$$

So, f and $f \circ I_{D_0}$ are the same mapping.

Suppose now that $f : D_0 \to D_1$ and $g : D_1 \to D_2$. We have to verify that $g \circ f$ is an approximable mapping. First off, there is no trouble in seeing that $\Delta_0\ g \circ f\ \Delta_2$ holds. Next, suppose that $X\ g \circ f\ Z$ and $X\ g \circ f\ Z'$ hold. Then we have $X\ f\ Y$ and $Y\ g\ Z$ for some choice of $Y \in D_1$. Also $X\ f\ Y'$ and $Y'\ g\ Z'$ hold for some choice of $Y' \in D_1$. By 2.1 (ii) it follows that $X\ f\ (Y \cap Y')$. Since $Y \cap Y' \subseteq Y$, we conclude $(Y \cap Y')\ g\ Z$ by 2.1 (iii); similarly $(Y \cap Y')\ g\ Z'$. Invoking 2.1 (ii) again, we obtain $(Y \cap Y')\ g\ (Z \cap Z')$, and $X\ g \circ f\ (Z \cap Z')$ is proved.

Suppose finally that $X' \subseteq X$, $X\ g \circ f\ Z$, and $Z \subseteq Z'$. Now $X\ f\ Y$ and $Y\ g\ Z$ for some $Y \in D_1$. But then $X'\ f\ Y$ holds; for a similar reason $Y\ g\ Z'$ holds also. Therefore, $X'\ g \circ f\ Z'$ is established, which means that we have checked 2.1 (iii) for $g \circ f$ and have completed the proof that $g \circ f : D_0 \to D_2$.

The verification of associativity is a purely logical deduction. Thus suppose that in addition to f and g we have $h : D_2 \to D_3$. If $X \in D_0$ and $W \in D_3$ we find

$$\begin{aligned} X\ h \circ (g \circ f)\ W &\text{ iff } \exists Z \in D_2.\ X\ g \circ f\ Z \text{ and } Z\ h\ W \\ &\text{iff } \exists Z \in D_2\ \exists Y \in D_1.\ X\ f\ Y \text{ and } Y\ g\ Z \text{ and } Z\ h\ W \\ &\text{iff } \exists Y \in D_1\ \exists Z \in D_2.\ X\ f\ Y \text{ and } Y\ g\ Z \text{ and } Z\ h\ W \\ &\text{iff } \exists Y \in D_1.\ X\ f\ Y \text{ and } Y\ (h \circ g)\ W \\ &\text{iff } X\ (h \circ g) \circ f\ W. \end{aligned}$$

So, as relations, $h \circ (g \circ f) = (h \circ g) \circ f$. □

It may seem as though we have, in the definition of composition, written things backwards. But the reason is that when mappings are taken as elementwise functions, then the order is preserved in expressions involving the usual function value notation. We have, for example:

3.46.2 AI: Human-English to AI-Lean

Theorem_2_5.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Theorem_2_5.lean

3.47 Proposition 2.6

3.47.1 Human-English

PROPOSITION 2.6. Given $f : D_0 \to D_1$ and $g : D_1 \to D_2$, the following equations hold:

(i) $I_{D_0}(x) = x$, and

(ii) $(g \circ f)(x) = g(f(x))$,

for all $x \in |D_0|$. □

The proof is not troublesome and is left as an exercise. In technical language the result shows that the category defined in Theorem 2.5 is equivalent to a "concrete category" of sets and functions, namely the domains and elementwise transformations of 2.2.

Toward the end of the last lecture (see 1.9) we promised to show that isomorphisms of domains always come from approximable mappings, and this we now do. It means that the category contains all the isomorphisms it should have.

3.47.2 AI: Human-English to AI-Lean

Proposition_2_6.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Proposition_2_6.lean

3.48 Theorem 2.7

3.48.1 Human-English

THEOREM 2.7. Every isomorphism between domains results from an approximable mapping between the neighbourhood systems. Moreover, finite elements are always transformed into finite elements.

Proof: Suppose that $f : |D_0| \to |D_1|$ is a one-one, inclusion-preserving function defined on elements, where the range of the function is the whole of $|D_1|$, of course. Taking the hint from 2.2, there is only one way we could define a neighbourhood mapping; namely, we consider the relation $Y \in f(\uparrow X)$ for $X \in D_0$ and $Y \in D_1$. What has to be shown is that this is an approximable mapping which determines the original function via the formula 2.2 (i).

The first part is easy; indeed, there is a general result that monotone functions on finite elements of one domain to arbitrary elements of another domain always determine approximable mappings (cf. Exercise 2.8). What remains, then, is to show that the relation re-defines the function. This comes down to showing that for $x \in |D_0|$

$$f(x) = \{Y \in D_1 \mid \exists X \in x.\, Y \in f(\uparrow X)\}.$$

Consider the right-hand side of this equation: it is a filter. (This either can be proved directly or Exercise 2.11 can be used.) Because f is an onto-function, we can call the right-hand side $f(x')$ for some $x' \in |D_0|$. But since $X \in x$ implies $\uparrow X \subseteq x$ and $f(\uparrow X) \subseteq f(x)$, the right-hand side is included in the left-hand side. In other words $f(x') \subseteq f(x)$. But, since f is an isomorphism, $x' \subseteq x$ follows.

In the other direction, if $X \in x$, then $f(\uparrow X) \subseteq f(x')$ holds by definition, so $\uparrow X \subseteq x'$. This implies $X \in x'$; and, as X is arbitrary, $x \subseteq x'$. So $x = x'$, and $f(x) = f(x')$ as desired.

Finally, consider any finite element $\uparrow X \in |D_0|$, where $X \in D_0$. What we have to show is that $f(\uparrow X)$ is finite in $|D_1|$. Because f is an isomorphism, we can associate uniquely to every $Y \in f(\uparrow X)$ an element $y_Y \subseteq\uparrow X$ in $|D_0|$ where $f(y_Y) =\uparrow Y$. (Just apply the inverse of the function f.) Define

$$z = \bigcup\{y_Y \mid Y \in f(\uparrow X)\}.$$

Because $Y' \subseteq Y$ always implies $y_{Y'} \subseteq y_Y$ and each $y_Y \in |D_0|$, it is easy to show z is a filter and hence is in $|D_0|$ also (cf. Exercise 2.11). Because each $y_Y \subseteq\uparrow X$, then $z \subseteq\uparrow X$, too. But each $y_Y \subseteq z$, so $\uparrow Y = f(y_Y) \subseteq f(z)$ and hence $Y \in f(z)$. As this holds for all $Y \in f(\uparrow X)$, the inclusion $f(\uparrow X) \subseteq f(z)$ follows, as well as $\uparrow X \subseteq z$. Therefore, $z =\uparrow X$ and so $X \in z$. But then $X \in y_Y$ for some $Y \in f(\uparrow X)$, by definition of z. Since $\uparrow X \subseteq y_Y$, we obtain $f(\uparrow X) \subseteq\uparrow Y$, but of course the opposite inclusion is also true from the choice of Y. This means that $f(\uparrow X) =\uparrow Y$ is finite in $|D_1|$ as claimed. We can apply the same argument to the inverse function; and, thus, the finite elements of $|D_0|$ and $|D_1|$ are in a one-one inclusion-preserving correspondence under the isomorphism. □

3.48.2 AI: Human-English to AI-Lean

Theorem_2_7.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Theorem_2_7.lean

3.49 Lecture II exercises

3.49.1 Human-English

3.49.2 EXERCISES

3.50 Exercise 2.8

3.50.1 Human-English

EXERCISE 2.8. With reference to the proof of 2.2 show that an approximable mapping is uniquely determined by its elementwise effect on finite elements. Moreover any arbitrary monotone function on finite elements of $|D_0|$ with values in $|D_1|$ comes from an approximable $f : D_0 \to D_1$.

3.50.2 AI: Human-English to AI-Lean

Exercise_2_8.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_8.lean

3.51 Exercise 2.9

3.51.1 Human-English

EXERCISE 2.9. Prove that if $f : D_0 \to D_1$ is an approximable mapping, then the elementwise mapping $f : |D_0| \to |D_1|$ satisfies the equation

$$f(x) = \bigcup\{f(\uparrow X) \mid X \in x\}$$

for all $x \in |D_0|$. Conversely, show that every elementwise function satisfying this equation comes from an approximable mapping as defined in 2.2.

3.51.2 AI: Human-English to AI-Lean

Exercise_2_9.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_9.lean

3.52 Exercise 2.10

3.52.1 Human-English

EXERCISE 2.10. Carry out the proof of Proposition 2.6; and in addition show that, if $f, g : D_0 \to D_1$ are two approximable mappings, there exists $h : D_0 \to D_1$ such that

$$h(x) = f(x) \cap g(x)$$

for all $x \in |D_0|$.

3.52.2 AI: Human-English to AI-Lean

Exercise_2_10.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_10.lean

3.53 Exercise 2.11

3.53.1 Human-English

EXERCISE 2.11. Let $(I, \leq)$ be a non-empty abstract partially ordered set; suppose it is directed in the sense that whenever $i, j \in I$, then $i \leq k$ and $j \leq k$ for some $k \in I$. Suppose that $a : I \to |D|$ is such that

$$i \leq j \text{ implies } a_i \subseteq a_j$$

for all $i, j \in I$. Prove that

$$\bigcup\{a_i \mid i \in I\}$$

is always a filter in $|D|$. (Note the ways this lemma could be used in the proof of 2.7; but be careful in defining the partially ordered set and do not confuse $\subseteq$ and $\supseteq$.) In words we could say that the domain of filters is closed under directed unions. Prove also that if $f : D \to D'$ is an approximable mapping, then for any directed union

$$f(\bigcup\{a_i \mid i \in I\}) = \bigcup\{f(a_i) \mid i \in I\};$$

that is, approximable mappings always preserve directed unions. If an elementwise function preserves directed unions, must it come from an approximable mapping? (Hint: Invoke 2.9.)

3.53.2 AI: Human-English to AI-Lean

Exercise_2_11.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_11.lean

3.54 Exercise 2.12

3.54.1 Human-English

EXERCISE 2.12. Suppose $(I, \leq)$ is a directed, partially ordered set and $f_i : D_0 \to D_1$ is a family of approximable mappings indexed by $i \in I$, where we assume

$$i \leq j \text{ implies } f_i(x) \subseteq f_j(x)$$

for all $i, j \in I$ and all $x \in |D_0|$. Prove that there is an approximable mapping $g : D_0 \to D_1$ where

$$g(x) = \bigcup\{f_i(x) \mid i \in I\}$$

for all $x \in |D_0|$.

3.54.2 AI: Human-English to AI-Lean

Exercise_2_12.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_12.lean

3.55 Exercise 2.13

3.55.1 Human-English

EXERCISE 2.13. (For topologists.) Recall Exercise 1.22 where it was shown that any domain $|D|$ is a topological space. Prove from Exercise 2.9 that the functions $f : |D_0| \to |D_1|$ determined by approximable mappings are exactly *the continuous functions between these spaces.* (Hint: To prove continuity, remark that by 2.9

$$f^{-1}[Y] = \bigcup\{[X] \mid Y \in f(\uparrow X)\};$$

hence, the inverse image of any open set is open. In the other direction, suppose that $f : |D_0| \to |D_1|$ is topologically continuous. Argue that for all $x \in |D_0|$ and all open subsets $U \subseteq |D_1|$ we have

$$f(x) \in U \text{ iff } \exists X \in x.\ f(\uparrow X) \in U.$$

This holds because an open subset of $|D_0|$ is always a union of basic open subsets of the form $[X']$ for $X \in D_0$ and because

$$x = \bigcup\{\uparrow X \mid X \in x\}$$

for all $x \in |D_0|$.)

3.55.2 AI: Human-English to AI-Lean

Exercise_2_13.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_13.lean

3.56 Exercise 2.14

3.56.1 Human-English

EXERCISE 2.14. Let $f : |D_0| \to |D_1|$ be an isomorphism between domains. Let $\varphi : D_0 \to D_1$ be the one-one correspondence between neighbourhoods provided by Theorem 2.7 where

$$f(\uparrow X) = \uparrow \varphi(X)$$

for all $X \in D_0$. Show that the approximable mapping determined by f is just the relationship $\varphi(X) \subseteq Y$. In addition prove that if $X, X' \in D_0$ are consistent, then

$$\varphi(X \cap X') = \varphi(X) \cap \varphi(X').$$

Remark that the isomorphisms between domains correspond exactly to the isomorphisms between neighbourhood systems (in the sense of one-one inclusion preserving correspondences).

3.56.2 AI: Human-English to AI-Lean

Exercise_2_14.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_14.lean

3.57 Exercise 2.15

3.57.1 Human-English

EXERCISE 2.15. (For topologists.) Consider the one-token system with

$$\mathcal{O} = \{\{0\}, \emptyset\}.$$

We can regard $|\mathcal{O}|$ as having just two finite elements $\bot$ (bottom) and $\top$ (top), where $\bot \sqsubseteq \top$. For any system D, show that the open subsets U of $|D|$ are in a one-one correspondence with the approximable mappings $f : D \to \mathcal{O}$, where the correspondence is given by the equation

$$U = \{x \in |D| \mid f(x) = \top\}.$$

What are the open subsets of $|\mathcal{O}|$? of $|\mathbb{T}|$? of $|\mathbb{B}|$?

3.57.2 AI: Human-English to AI-Lean

Exercise_2_15.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_15.lean

3.58 Exercise 2.16

3.58.1 Human-English

EXERCISE 2.16. In the discussion of $\mathbb{B}$ in Chapter 1 we defined a mapping $x \mapsto \sigma x$ for any given $\sigma \in \Sigma^*$. Is this (elementwise) mapping approximable? Show in addition that the mapping $f : \mathbb{B} \to \mathbb{T}$ of 2.3 is uniquely determined among approximable mappings by the equations:

$$f(1x) = \text{true},$$
$$f(01x) = \text{false, and}$$
$$f(00x) = f(x).$$

3.58.2 AI: Human-English to AI-Lean

Exercise_2_16.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_16.lean

3.59 Exercise 2.17

3.59.1 Human-English

EXERCISE 2.17. Establish in detail that the mapping $g : \mathbb{B} \to \mathbb{B}$ of Exercise 2.4 is approximable. Is it uniquely determined by these equations:

$$g(0x) = 0g(x),$$
$$g(11x) = g(1x),$$
$$g(10x) = 0x,$$
$$g(1) = \bot,$$

or are some missing?

3.59.2 AI: Human-English to AI-Lean

Exercise_2_17.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_17.lean

3.60 Exercise 2.17

3.60.1 Human-English

EXERCISE 2.17. Establish in detail that the mapping $g : \mathbb{B} \to \mathbb{B}$ of Exercise 2.4 is approximable. Is it uniquely determined by these equations:

$$g(0x) = 0g(x),$$

$$g(11x) = g(1x),$$
$$g(10x) = 0x,$$
$$g(1) = \bot,$$

or are some missing?

3.60.2 AI: Human-English to AI-Lean

Exercise_2_17b.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_17b.lean

3.61 Exercise 2.18

3.61.1 Human-English

EXERCISE 2.18. What is the meaning in words of the approximable mapping $h : \mathbb{B} \to \mathbb{B}$, where

$$h(0x) = 00h(x), \text{ and}$$
$$h(1x) = 10h(x),$$

for all elements $x \in |\mathbb{B}|$? Is h an isomorphism? Does there exist a map $k : \mathbb{B} \to \mathbb{B}$ where

$$k \circ h = I_{\mathbb{B}},$$

and is k one-one?

3.61.2 AI: Human-English to AI-Lean

Exercise_2_18.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_18.lean

3.62 Exercise 2.19

3.62.1 Human-English

EXERCISE 2.19. Generalize Definition 2.1 in an appropriate way in order to define the concept of *an approximable mapping*

$$f : \mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}_2$$

of two variables. (Hint: f can be taken to be a certain kind of ternary relation

$$f \subseteq \mathcal{D}_0 \times \mathcal{D}_1 \times \mathcal{D}_2,$$

where we can write

$$X, Y \; f \; Z$$

for the relationship among neighbourhoods.) What is the corresponding version of Proposition 2.2 for functions of two variables?

3.62.2 AI: Human-English to AI-Lean

Exercise_2_19.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_19.lean

3.63 Exercise 2.20

3.63.1 Human-English

EXERCISE 2.20. Discuss again the example of Exercise 1.15 where the domain turns out to be the powerset (set of all subsets) of $\mathbf{N}$. Show how the finite elements can be taken to be the finite subsets of $\mathbf{N}$ and can be identified with the tokens of a suitable neighbourhood system $\mathcal{P}$. (Hint: Define $\uparrow F$ for finite sets $F \subseteq \mathbf{N}$.) Show that both union and intersection ($x \cup y$ and $x \cap y$) are functions on $|\mathcal{P}|$ that are approximable in the sense of Exercise 2.19. (The elements of $|\mathcal{P}|$ are being identified with arbitrary sets $x \subseteq \mathbf{N}$.) Show also that the following transformations are approximable:

$$x + 1 = \{n + 1 \mid n \in x\}, \text{ and}$$
$$x - 1 = \{n \mid n + 1 \in x\}.$$

3.63.2 AI: Human-English to AI-Lean

Exercise_2_20.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_20.lean

3.64 Exercise 2.21

3.64.1 Human-English

EXERCISE 2.21. The system $\mathcal{B}$ of 2.3 has as its total elements only the infinite sequences. Modify the construction of $\mathcal{B}$ to another neighbourhood system $\mathcal{C}$ which has *both* the finite and infinite sequences as total elements. (Hint: $\mathcal{B} \subseteq \mathcal{C}$.) Show that there is an approximable map xy on elements naturally extending ordinary juxtaposition of sequences. (Hint: Write 01001 for a *total* finite sequence and $01001\ \bot$ for the corresponding finite partial element. Remember to distinguish between Λ (the total empty sequence) and $\bot$ (the undefined sequence). The definition should work out so that if x is an infinite sequence (hence, total), then $xy = x$ for all y. What will xy equal if x is not total? In other words, the construction possesses a rather strong left-to-right bias.)

3.64.2 AI: Human-English to AI-Lean

Exercise_2_21.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_21.lean

3.65 Exercise 2.22

3.65.1 Human-English

EXERCISE 2.22. (For set theorists). We have remarked in Exercise 1.18 and in Exercise 2.11 that any domain $|D|$, as a family of sets (in fact, a family of subsets of the set D itself), is closed under the intersection of an arbitrary non-empty sub family and under the union of any directed sub family. For those familiar with the subject matter, the example of the (proper) ideals of a commutative ring (with unit) is also seen to be such a family. What is the abstract situation? Let $\mathbf{C}$ be *any* family of sets with these closure properties. It is to be shown that $\mathbf{C}$ is inclusion-isomorphic to a domain. (Hint: Let Δ be the set of finite sets included in sets in $\mathbf{C}$. For $F \in \Delta$, define its "closure" by the equation:

$$\overline{F} = \bigcap \{X \in \mathbf{C} \mid F \subseteq X\}.$$

Every $\overline{F} \in \mathbf{C}$, and these will prove to be the "finite" elements of $\mathbf{C}$. The neighbourhood system $\mathcal{D}$ over Δ can be taken to be the sets of the form

$$C(F) = \{G \in \Delta \mid F \subseteq \overline{G}\}$$

for $F \in \Delta$. Notice that for all $X \in \mathbf{C}$

$$X = \bigcup \{\overline{F} \mid F \subseteq X \text{ and } F \in \Delta\}.$$

)

Check that approximable functions on these families are just those preserving directed unions.

LECTURE III

DOMAIN CONSTRUCTS

Having now seen a number of domains presented through their neighbourhood systems, we need next to introduce general constructs for forming new domains from old. There are an unlimited number of such constructs (technically called *functors*), but we have time only to single out a few of the more important ones. Outstanding among all of them is the notion of product of systems, which in our chosen category has all the expected properties. For the time being in order to simplify notation we assume of the underlying sets Δ_0 and Δ_1 of systems $\mathcal{D}_0$ and $\mathcal{D}_1$ that they are disjoint. There is no loss of generality as $\mathcal{D}_1$ can always be replaced by an isomorphic system disjoint from $\mathcal{D}_0$ in the required sense.

3.65.2 AI: Human-English to AI-Lean

Exercise_2_22.lean

Lean source: DomainTheory/NeighbourhoodSystems/MappingsBetweenDomains/Exercise_2_22.lean

3.66 Domain constructs

Dependency diagram. Each box is one item. The arrowhead is on the item that imports. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it is not shown. Blue is a definition, green a proposition or lemma, amber an example, red a theorem, and indigo an exercise.

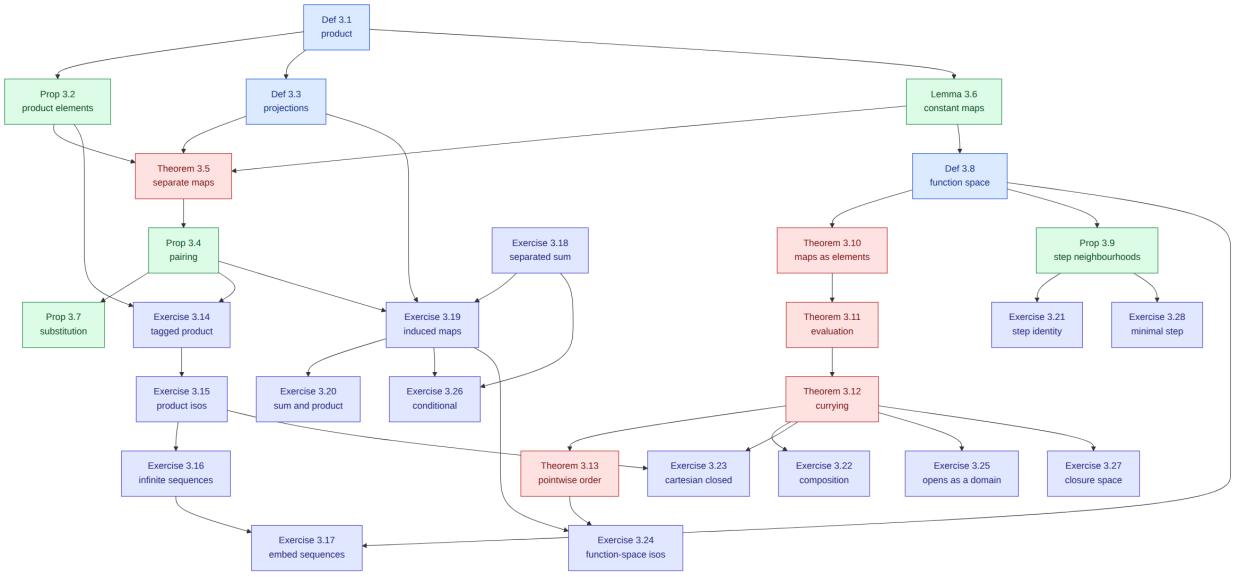


Figure 18: Domain constructs.

3.67 Introduction

3.67.1 Human-English

LECTURE III

DOMAIN CONSTRUCTS

Having now seen a number of domains presented through their neighbourhood systems, we need next to introduce general constructs for forming new domains from old. There are an unlimited number of such constructs (technically called *functors*), but we have time only to single out a few of the more important ones. Outstanding among all of them is the notion of product of systems, which in our chosen category has all the expected properties. For the time being in order to simplify notation we assume of the underlying sets Δ_0 and Δ_1 of systems $\mathcal{D}_0$ and $\mathcal{D}_1$ that they are disjoint. There is no loss of generality as $\mathcal{D}_1$ can always be replaced by an isomorphic system disjoint from $\mathcal{D}_0$ in the required sense.

3.68 Definition 3.1

3.68.1 Human-English

DEFINITION 3.1. Let neighbourhood systems $\mathcal{D}_0$ and $\mathcal{D}_1$ be given over disjoint sets Δ_0 and Δ_1. The *product system* over $\Delta_0 \cup \Delta_1$ is defined by:

$$\mathcal{D}_0 \times \mathcal{D}_1 = \{X \cup Y \mid X \in \mathcal{D}_0 \text{ and } Y \in \mathcal{D}_1\}.$$

For elements $x \in |\mathcal{D}_0|$ and $y \in |\mathcal{D}_1|$ we also define:

$$\langle x, y \rangle = \{X \cup Y \mid X \in x \text{ and } Y \in y\}.$$

□

3.68.2 AI: Human-English to AI-Lean

Definition_3_1.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Definition_3_1.lean

3.69 Proposition 3.2

3.69.1 Human-English

PROPOSITION 3.2. The construct $\mathcal{D}_0 \times \mathcal{D}_1$ always gives a neighbourhood system where for elements $x, x' \in |\mathcal{D}_0|$ and $y, y' \in |\mathcal{D}_1|$ we have

(i) $\langle x, y\rangle \subseteq \langle x', y'\rangle$ iff $x \subseteq x'$ and $y \subseteq y'$.

Moreover, there is a one-one correspondence between the elements of $|\mathcal{D}_0 \times \mathcal{D}_1|$ and pairs of elements of $|\mathcal{D}_0|$ and $|\mathcal{D}_1|$ since all elements of $|\mathcal{D}_0 \times \mathcal{D}_1|$ are of the form $\langle x, y\rangle$.

Proof: Owing to the disjointness of Δ_0 and Δ_1, we note that for $X, X' \in \mathcal{D}_0$ and $Y, Y' \in \mathcal{D}_1$ we have

$$(1)\ X \cup Y \subseteq X' \cup Y' \text{ iff } X \subseteq X' \text{ and } Y \subseteq Y'.$$

Thus, $\{X \cup Y, X' \cup Y'\}$ is consistent in $\mathcal{D}_0 \times \mathcal{D}_1$ iff $\{X, X'\}$ is consistent in $\mathcal{D}_0$ and $\{Y, Y'\}$ is consistent in $\mathcal{D}_1$. In the consistent case we find

$$(2) \qquad (X \cup Y) \cap (X' \cup Y') = (X \cap X') \cup (Y \cap Y'),$$

and so $\mathcal{D}_0 \times \mathcal{D}_1$ is closed under consistent intersection. As $\Delta_0 \cup \Delta_1 \in \mathcal{D}_0 \times \mathcal{D}_1$, it is certainly a neighbourhood system.

It is easy to check by the previous calculations that $\langle x, y\rangle \in |\mathcal{D}_0 \times \mathcal{D}_1|$ if $x \in |\mathcal{D}_0|$ and $y \in |\mathcal{D}_1|$. The proof of 3.2(i) follows directly from the definition and (1).

Suppose $z \in |\mathcal{D}_0 \times \mathcal{D}_1|$. Define as a temporary notation:

$$z_0 = \{X \in \mathcal{D}_0 \mid X \cup \Delta_1 \in z\}, \quad \text{and} \quad z_1 = \{Y \in \mathcal{D}_1 \mid \Delta_0 \cup Y \in z\}.$$

Clearly, both $z_0 \in |\mathcal{D}_0|$ and $z_1 \in |\mathcal{D}_1|$. In view of the formula

$$(3) \qquad (X \cup \Delta_1) \cap (\Delta_0 \cup Y) = X \cup Y,$$

we can calculate that

$$z = \langle z_0, z_1\rangle.$$

Moreover, if $z = \langle x, y\rangle$, then $\langle x, y\rangle_0 = x$ and $\langle x, y\rangle_1 = y$.

The one-one correspondence required is thus established. □

There is more going on in the proof of 3.2 than just a one-one correspondence between elements and pairs. The extra information is best formalized by introducing a notation for mappings.

3.69.2 AI: Human-English to AI-Lean

Proposition_3_2.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Proposition_3_2.lean

3.70 Definition 3.3

3.70.1 Human-English

DEFINITION 3.3. *Projection mappings*

$$p_0 : \mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}_0 \quad \text{and} \quad p_1 : \mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}_1$$

are defined as relations where

$$(X \cup Y)\ p_0\ X' \text{ iff } X \subseteq X', \quad \text{and} \quad (X \cup Y)\ p_1\ Y' \text{ iff } Y \subseteq Y'$$

hold for all $X, X' \in \mathcal{D}_0$ and $Y, Y' \in \mathcal{D}_1$. Given $f : \mathcal{D}_2 \to \mathcal{D}_0$ and $g : \mathcal{D}_2 \to \mathcal{D}_1$, the *paired mapping*

$$\langle f, g \rangle : \mathcal{D}_2 \to \mathcal{D}_0 \times \mathcal{D}_1$$

is defined as a relation where

$$Z\ \langle f, g \rangle\ (X \cup Y) \text{ iff } Z\ f\ X \text{ and } Z\ g\ Y$$

holds for all $X \in \mathcal{D}_0$, $Y \in \mathcal{D}_1$, and $Z \in \mathcal{D}_2$. □

3.70.2 AI: Human-English to AI-Lean

Definition_3_3.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Definition_3_3.lean

3.71 Proposition 3.4

3.71.1 Human-English

PROPOSITION 3.4. The mappings p_0, p_1 and $\langle f, g \rangle$ are approximable mappings, provided f and g are, and we have:

(i) $p_0 \circ \langle f, g \rangle = f$ and $p_1 \circ \langle f, g \rangle = g$.

Moreover, for $z \in |\mathcal{D}_0 \times \mathcal{D}_1|$, we have:

(ii) $p_0(z) = z_0$ and $p_1(z) = z_1$,

in the notation of the proof of 3.2. Further if $h : \mathcal{D}_2 \to \mathcal{D}_0 \times \mathcal{D}_1$ is any approximable mapping, then

(iii) $h = \langle p_0 \circ h, p_1 \circ h \rangle$.

Moreover, for all $w \in |\mathcal{D}_2|$, we have:

(iv) $\langle f, g\rangle(w) = \langle f(w), g(w)\rangle$,

where again on the right-hand side the notation of the proof of 3.2 is used. □

The proof of this result is left as an exercise. Note the consequence that there is a one-one correspondence between pairs of approximable mappings $f : \mathcal{D}_2 \to \mathcal{D}_0$ and $g : \mathcal{D}_2 \to \mathcal{D}_1$ and mappings $h : \mathcal{D}_2 \to \mathcal{D}_0 \times \mathcal{D}_1$. It is clear that we generalize all this to products

$$\mathcal{D}_0 \times \mathcal{D}_1 \times \cdots \times \mathcal{D}_{n-1}$$

of several systems.

The product construct also neatly explains functions of several variables. In Exercise 2.19 we used the informal notation

$$f : \mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}_2$$

and suggested regarding f as a ternary relation

$$X, Y \; f \; Z.$$

But now with $\mathcal{D}_0 \times \mathcal{D}_1$ given an independent meaning, all we have to do is to regard f as a binary relation with

$$(X, Y) \; f \; Z$$

equivalent to the old relationship. We can also employ an element-wise notation as in $f(\langle x, y\rangle)$, which can more easily be written $f(x, y)$. Similar remarks apply to functions of more than two arguments.

We have discussed several times what it means for a function $f(x)$ to come from an approximable mapping. It is interesting to ask the analogous question for functions of several arguments.

3.71.2 AI: Human-English to AI-Lean

Proposition_3_4.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Proposition_3_4.lean

3.72 Theorem 3.5

3.72.1 Human-English

THEOREM 3.5. An elementwise function

$$f : |D_0 \times D_1| \to |D_2|$$

of two arguments comes from an approximable mapping iff for each fixed $a \in |D_0|$ and each fixed $b \in |D_1|$ the transformations

$$x \mapsto f(x, b) \quad \text{and} \quad y \mapsto f(a, y)$$

come from approximable mappings of one argument.

Proof: As this is the first time we have had to deal with constants in functions, a lemma is useful.

3.72.2 AI: Human-English to AI-Lean

Theorem_3_5.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Theorem_3_5.lean

3.73 Lemma 3.6

3.73.1 Human-English

LEMMA 3.6. Given $b \in |D_1|$, the constant function

$$b : |D_0| \to |D_1|$$

where $b(x) = b$ for all $x \in |D_0|$, comes from the approximable mapping such that

$$X \; b \; Y \quad \text{iff} \quad Y \in b,$$

for all $X \in D_0$ and $Y \in D_1$. □

There is no real confusion here in using "b" both for function and value. Returning, then, to the proof of 3.5, we see that the reason that $x \mapsto f(x, b)$ comes from an approximable mapping is that the mapping in question is the composition of two approximable mappings, namely $f \circ \langle I_{D_0}, b\rangle$. Clearly we can interchange the rôles of D_0 and D_1 to get at $y \mapsto f(a, y)$.

Conversely, assume that both these functions come from approximable mappings no matter the choice of a and b. Clearly the mapping to determine f is the relation from $X \cup Y$ to Z where

$$Z \in f(\uparrow X, \uparrow Y) = f(\uparrow (X \cup Y)).$$

To prove that this determines f we calculate by the formula of Exercise 2.9:

$$\begin{aligned} f(x, y) &= \bigcup\{f(\uparrow X, y) \mid X \in x\} \\ &= \bigcup\{\bigcup\{f(\uparrow X, \uparrow Y) \mid Y \in y\} \mid X \in x\} \\ &= \bigcup\{f(\uparrow X, \uparrow Y) \mid X \in x \text{ and } Y \in y\} \\ &= \bigcup\{f(\uparrow (X \cup Y)) \mid (X \cup Y) \in \langle x, y\rangle\}. \end{aligned}$$

And, again by 2.9, this is what was needed. □

Said more informarily, a function of several arguments is approximable in all the variables *jointly* if it is approximable in each of the variables *separately*.

The type of argument used in 3.5 in the first half of the proof also provides a generalization of 2.6 to functions of several arguments. When we form a function like

$$f(g(x, z, \ldots), h(y, x, \ldots), k(z, w, \ldots), \ldots)$$

from given functions $f, g, h, k, \ldots$; we call the process *substitution*.

3.73.2 AI: Human-English to AI-Lean

Lemma_3_6.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Lemma_3_6.lean

3.74 Proposition 3.7

3.74.1 Human-English

PROPOSITION 3.7. The functions of several arguments between domains coming from approximable mappings are closed under substitution.

Proof: An example will establish the method. Suppose there are four variables involved taking values in domains provided by systems D_0, D_1, D_2, D_3. We might have a substitution like:

$$f(g(x_0, x_1), h(x_1, x_2), k(x_3, x_0, x_2)).$$

Here it might be that the values of the functions inside come from quite other systems; for instance,

$$k : D_3 \times D_0 \times D_2 \to D_4$$

might be possible. By using projections

$$p_i : D_0 \times D_1 \times D_2 \times D_3 \to D_i,$$

where $i < 4$, we can assure that we have several functions all on the same product; thus,

$$k \cdot \langle p_3, p_0, p_2 \rangle : D_0 \times D_1 \times D_2 \times D_3 \to D_4.$$

Now no matter on what domains f is defined, the following composition makes sense:

$$f \circ \langle g \circ \langle p_0, p_1 \rangle, h \circ \langle p_1, p_2 \rangle, k \circ \langle p_3, p_0, p_2 \rangle \rangle;$$

and in fact this is the desired function. Writing it this way makes it clear that the function comes from an approximable mapping: we apply 3.3 (generalized, of course, to products with several terms) to construe the parts between brackets $\langle$ and $\rangle$ as approximable mappings, and then by this trick the composition $\circ$ is the ordinary composition of 2.6. □

It has to be admitted that there is a slight point overlooked in forming products like $D \times D$ with two identical domains. This is discussed in Exercise 3.14, invoking explicit isomorphisms.

The construct that makes the whole theory of domains work so smoothly is the function-space construct: it is possible to regard functions as *objects* which form a domain. Look back at Definition 2.1 and compare it with the original definition of element in 1.6. There are obvious formal similarities, except that filters are sets of neighbourhoods and mappings are sets of pairs of neighbourhoods (relations). But as we saw in 1.10 it is possible to turn the filters into tokens via a simple definition of neighbourhood. We apply the same kind of definition to the mappings.

3.74.2 AI: Human-English to AI-Lean

Proposition_3_7.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Proposition_3_7.lean

3.75 Definition 3.8

3.75.1 Human-English

DEFINITION 3.8. Given neighbourhood systems D_0 and D_1, the *function space* $(D_0 \to D_1)$ is the system whose set of tokens is the set of approximable mappings of Definition 2.1 and whose neighbourhoods are finite non-empty intersections of sets of the form

$$[X, Y] = \{f : D_0 \to D_1 \mid X f Y\},$$

where $X \in D_0$ and $Y \in D_1$. $\square$

We have been calling our mappings "approximable" for a long time now without saying exactly how they can be approximated! Definition 3.8 supplies the missing key, because once a domain has been defined, then the general theory gives an explicit meaning to the word approximation. We still have to verify, however, that the mappings do correspond to the elements of the domain.

3.75.2 AI: Human-English to AI-Lean

Definition_3_8.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Definition_3_8.lean

3.76 Proposition 3.9

3.76.1 Human-English

PROPOSITION 3.9. Let neighbourhoods $X_i \in D_0$ and $Y_i \in D_1$ be given for $i < n$. Then the set of $[X_i, Y_i]$ for $i < n$ is consistent in $(D_0 \to D_1)$ iff the following condition holds:

(i) whenever $I \subseteq \{0, 1, \ldots, n-1\}$ and $\{X_i \mid i \in I\}$ is consistent in D_0, then $\{Y_i \mid i \in I\}$ must be consistent in D_1.

Moreover, when consistency holds, the least approximable mapping f_0 belonging to the intersection of the $[X_i, Y_i]$ is defined by:

(ii) $X f_0 Y$ iff $\bigcap\{Y_i \mid X \subseteq X_i\} \subseteq Y$ for $X \in D_0$ and $Y \in D_1$.

Proof: Suppose the $[X_i, Y_i]$ are consistent in $(D_0 \to D_1)$. Since the function space is being defined outright as a positive system, consistency means

$$f \in \bigcap\{[X_i, Y_i] \mid i < n\}$$

for some $f : D_0 \to D_1$. Now, with f in hand, let us check condition (i). Suppose $\{X_i \mid i \in I\}$ is consistent. This means

$$x \in \bigcap\{[X_i] \mid i \in I\}$$

for some $x \in |D_0|$. Suppose $i \in I$, so $x \in [X_i]$. Since $X_i f Y_i$ holds, $f(x) \in [Y_i]$. This means, therefore, that

$$f(x) \in \bigcap\{[Y_i] \mid i \in I\},$$

and so $\{Y_i \mid i \in I\}$ is consistent.

For the converse, suppose (i) is the case. We take (ii) as the definition of a mapping and remark that for an arbitrary $X \in D_0$, the set $\{X_i \mid X \subseteq X_i\}$ is automatically consistent in D_0. By our assumption, the set $\{Y_i \mid X \subseteq X_i\}$ is therefore consistent. This means that

$$\bigcap\{Y_i \mid X \subseteq X_i\} \in D_1.$$

(Keep in mind that i is restricted to those $i < n$, and there are only finitely many neighbourhoods being considered here.) It is thus almost immediate that the relation f_0 defined by (ii) satisfies conditions of 2.1 and so is an approximable mapping $f_0 : D_0 \to D_1$. By construction

$$X_i f_0 Y_i$$

holds trivially for all $i < n$; therefore,

$$f_0 \in \bigcap\{[X_i, Y_i] \mid i < n\}$$

and the desired consistency is established.

Finally suppose that f is any mapping in the neighbourhood under discussion; this means $X_i f Y_i$ holds for all $i < n$. Suppose $X f_0 Y$ holds. We have for $X \subseteq X_i$, $X f Y_i$; so

$$X f \bigcap\{Y_i \mid X \subseteq X_i\} \subseteq Y.$$

Thus, $X f Y$ follows; hence, as relations, $f_0 \subseteq f$. In other words f_0 is the minimal element of the neighbourhood. □

We note that, as a consequence of what we have just proved, when the neighbourhood is consistent, then

$$\bigcap\{[X_i, Y_i] \mid i < n\} \subseteq [X, Y]$$

is exactly equivalent to

$$\bigcap\{Y_i \mid X \subseteq X_i\} \subseteq Y.$$

Note also that a single neighbourhood $[X_0, Y_0]$ is always consistent since it contains the *constant mapping* k where

$$X k Y \text{ iff } Y_0 \subseteq Y,$$

for all $X \in \mathcal{D}_0$ and $Y \in \mathcal{D}_1$. Some other simple observations about these neighbourhoods are just translations of the conditions of Definition 2.1:

$$[\Delta_0, \Delta_1] = |\mathcal{D}_0 \to \mathcal{D}_1|;$$

$$[X, Y] \cap [X, Y'] = [X, Y \cap Y']; \text{ and}$$

$$X' \subseteq X \text{ and } Y \subseteq Y' \text{ imply } [X, Y] \subseteq [X', Y'],$$

for all $X, X' \in \mathcal{D}_0$ and $Y, Y' \in \mathcal{D}_1$. We are now ready to prove the main result about the construct.

3.76.2 AI: Human-English to AI-Lean

Proposition_3_9.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Proposition_3_9.lean

3.77 Theorem 3.10

3.77.1 Human-English

THEOREM 3.10. Given neighbourhood systems $\mathcal{D}_0$ and $\mathcal{D}_1$, the function space system $(\mathcal{D}_0 \to \mathcal{D}_1)$ is complete in the sense that every filter in $|\mathcal{D}_0 \to \mathcal{D}_1|$ is fixed by a unique approximable mapping.

Proof: Let $f : \mathcal{D}_0 \to \mathcal{D}_1$ be an approximable mapping. By the very definition of $(\mathcal{D}_0 \to \mathcal{D}_1)$ it determines a filter by the definition:

$$\hat{f} = \{F \in (D_0 \to D_1) \mid f \in F\}.$$

Trivially $[X, Y] \in \hat{f}$ iff $f \in [X, Y]$ iff $X f Y$; so this filter uniquely determines the relation f. What we have to show is that every filter in $|D_0 \to D_1|$ is of this form.

Suppose $\varphi \in |D_0 \to D_1|$ is any filter. A relation can be defined at once by

$$X \hat{\varphi} Y \quad \text{iff} \quad [X, Y] \in \varphi.$$

In view of the remarks we made just before stating this theorem, there is no problem in showing that $\hat{\varphi}$ is an approximable mapping. Since the neighbourhoods of the function space are in any case finite intersections of sets like $[X, Y]$, those $[X, Y] \in \varphi$ generate φ. This means that $\hat{\hat{\varphi}} = \varphi$. By definition $\hat{\hat{f}} = f$, so there is a one-one correspondence between mappings and filters. (This correspondence is obviously inclusion preserving, too.) $\square$

We now know just about everything about $|D_0 \to D_1|$ as a domain: the elements correspond isomorphically to the approximable mappings; the finite elements are explained completely by 3.9; and we have seen how to calculate with neighbourhoods. The final step is to relate the function space to other domains by appropriate mappings. In doing this we shall freely construe elements of $|D_0 \to D_1|$ as approximable mappings in view of 3.10.

3.77.2 AI: Human-English to AI-Lean

Theorem_3_10.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Theorem_3_10.lean

3.78 Theorem 3.11

3.78.1 Human-English

THEOREM 3.11. Given neighbourhood systems D_1 and D_2, there is a uniquely determined approximable mapping

$$\text{eval} : (D_1 \to D_2) \times D_1 \to D_2,$$

where for all $f : D_1 \to D_2$ and all $x \in |D_1|$ we have

(i) $\text{eval}(f, x) = f(x)$.

Proof: For $F \in (D_1 \to D_2)$ and $X \in D_1$ and $Y \in D_2$ define eval as a relation by:

$$F, X \text{ eval } Y \quad \text{iff} \quad X f Y \text{ for all } f \in F.$$

Remember that neighbourhoods in the function space are sets of approximable mappings. It is easily checked that this definition makes eval approximable. We now calculate the function values by the formula of 2.2 (i):

$$\text{eval}(f, x) = \{Y \in D_2 \mid \exists F \in (D_1 \to D_2)\, \exists X \in x.\ f \in F \text{ and } F \cup X \text{ eval } Y\}$$

Because, again by 2.2 (i), we have

$$f(x) = \{Y \in D_2 \mid \exists X \in x.\ X f Y\},$$

we can see from the definition of eval that $\text{eval}(f, x) \subseteq f(x)$. Suppose that $Y \in f(x)$. Then $X f Y$ holds for some $X \in x$. We can write $f \in [X, Y] \in (D_1 \to D_2)$ and it is clear that

$$[X, Y] \cup X \text{ eval } Y$$

holds by definition. Therefore, $Y \in \text{eval}(f, x)$, and so $f(x) \subseteq \text{eval}(f, x)$. □

This theorem is essential for our programme: it shows that in taking functions as objects the very basic operation of forming the function value is an approximable mapping. In other words we can treat the expression $f(x)$ not just as a function of x, as we have done from the start, but also as a function of f as well. The result also indicates that there are useful maps defined on domains that themselves are function spaces; we shall meet many more of these. The next theorem provides further examples.

3.78.2 AI: Human-English to AI-Lean

Theorem_3_11.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Theorem_3_11.lean

3.79 Theorem 3.12

3.79.1 Human-English

THEOREM 3.12. Given neighbourhood systems D_0, D_1, D_2 there is associated with every approximable mapping $g : D_0 \times D_1 \to D_2$ a uniquely determined approximable mapping

$$\text{curry}(g) : D_0 \to (D_1 \to D_2)$$

such that for $x \in |D_0|$ and $y \in |D_1|$

(i) $\text{curry}(g)(x)(y) = g(x, y)$.

Moreover we have these functional equations:

(ii) $\text{eval} \circ \langle \text{curry}(g) \circ p_0,\ p_1 \rangle = g$, and

(iii) $\text{curry}(\text{eval} \circ \langle h \circ p_0,\ p_1 \rangle) = h$,

where the $p_i : \mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}_i$ are the projection mappings and $h : \mathcal{D}_0 \to (\mathcal{D}_1 \to \mathcal{D}_2)$ is any approximable mapping. This provides an isomorphism between the domains $|\mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}_2|$ and $|\mathcal{D}_0 \to (\mathcal{D}_1 \to \mathcal{D}_2)|$ and so we can regard

$$\text{curry} : (\mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}_2) \to (\mathcal{D}_0 \to (\mathcal{D}_1 \to \mathcal{D}_2))$$

as itself being an approximable mapping.

Proof: Given g as indicated, we can define $\text{curry}(g)$ as a relation and as an approximable mapping by:

$$X\ \text{curry}(g)\ [Y, Z] \text{ iff } X \cup Y\ g\ Z \quad \text{(but see Ex. 3.21)}$$

for all $X \in \mathcal{D}_0$, $Y \in \mathcal{D}_1$, $Z \in \mathcal{D}_2$. This is sufficient because an approximable mapping is intersective in the right-hand neighbourhood, so we know from the above exactly what $X\ \text{curry}(g)\ \bigcap\{[Y_i, Z_i] \mid i < n\}$ means for all finite intersections. The remark after 3.9 is then helpful in checking that by this definition $\text{curry}(g)$ satisfies the monotonicity condition and so is indeed approximable. We now calculate:

$$\begin{aligned}
\text{curry}(g)(x)(y) &= \{Z \in \mathcal{D}_2 \mid \exists Y \in y.\ Y\ \text{curry}(g)\ (x)\ Z\} \\
&= \{Z \in \mathcal{D}_2 \mid \exists Y \in y\ \exists X \in x.\ X\ \text{curry}(g)\ [Y, Z]\} \\
&= \{Z \in \mathcal{D}_2 \mid \exists Y \in y\ \exists X \in x.\ X \cup Y\ g\ Z\} \\
&= \{Z \in \mathcal{D}_2 \mid \exists W \in \langle x, y \rangle.\ W\ g\ Z\} \\
&= g(\langle x, y \rangle) = g(x, y).
\end{aligned}$$

This proves (i). We also see, that if we take the left-hand side of (ii) and apply it to a pair $\langle x, y \rangle$, it reduces to $g(x, y)$ by virtue of (i). Thus, the two functions in (ii) are the same.

Turning to (iii), call the left-hand side k. Using (i) again, we find

$$\begin{aligned}
k(x)(y) &= \text{eval} \circ \langle h \circ p_0, p_1 \rangle(\langle x, y \rangle) \\
&= \text{eval}(\langle h \circ p_0(\langle x, y \rangle), p_1(\langle x, y \rangle)\rangle) \\
&= \text{eval}(\langle h(x), y \rangle) \\
&= h(x)(y).
\end{aligned}$$

As this is true for all $y \in |\mathcal{D}_1|$, then $k(x) = h(x)$ follows. As this is true for all $x \in |\mathcal{D}_0|$, then $k = h$ follows, and (iii) is proved.

Taking (ii) and (iii) together, it is clear that the domains $|D_0 \times D_1 \to D_2|$ and $|D_0 \to (D_1 \to D_2)|$ are in a one-one correspondence.

$$\text{curry}(g) \sqsubseteq \text{curry}(g') \text{ iff } g \sqsubseteq g'.$$

Hence, curry is an isomorphism, and we can invoke 2.7 to conclude that it comes from an approximable mapping. □

We close this lecture with some order-theoretic properties of function spaces that characterize inclusion and upper bounds of functions in a "pointwise" manner.

3.79.2 AI: Human-English to AI-Lean

Theorem_3_12.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Theorem_3_12.lean

3.80 Theorem 3.13

3.80.1 Human-English

THEOREM 3.13. For approximable functions $f, g : D_0 \to D_1$ we have

(i) $f \sqsubseteq g$ iff $f(x) \sqsubseteq g(x)$ for all $x \in |D_0|$.

For subsets $F \subseteq |D_0 \to D_1|$ we have

(ii) F is bounded in $|D_0 \to D_1|$ iff $\{f(x) \mid f \in F\}$ is bounded in $|D_1|$ for each $x \in |D_0|$;

and in that case for all $x \in |D_0|$:

(iii) $(\bigsqcup F)(x) = \bigsqcup\{f(x) \mid f \in F\}$.

Proof. The implication in (i) from left to right follows because evaluation is monotone in the function as well as the argument. The converse implication is a consequence of 2.2(ii).

For the proof of (ii) and (iii) we see that by (i) if F is bounded, so is every set $\{f(x) \mid f \in F\}$. For the converse direction, it is clear that (iii) defines *some* pointwise mapping; we have only to prove that it is *approximable*. The calculation that $\sqcup F$ preserves directed unions (see 2.9 and 2.11) is probably the simplest way to reach the conclusion. □

3.80.2 AI: Human-English to AI-Lean

Theorem_3_13.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Theorem_3_13.lean

3.81 Lecture III exercises

3.81.1 Human-English

3.81.2 EXERCISES

3.82 Exercise 3.14

3.82.1 Human-English

EXERCISE 3.14. For the most part we can assume that there is at most a countable number of tokens; thus, without loss of generality the underlying sets Δ_i of given systems $\mathcal{D}_i$ could be assumed to be subsets of Σ^* where $\Sigma = \{0, 1\}$. (Any denumerable set would do.) Show that the product $\mathcal{D}_0 \times \mathcal{D}_1$ could be defined as the system over the set $0\Delta_0 \cup 1\Delta_1$ where

$$\mathcal{D}_0 \times \mathcal{D}_1 = \{0X \cup 1Y \mid X \in \mathcal{D}_0 \text{ and } Y \in \mathcal{D}_1\}.$$

In other words, the assumption of the disjointness of Δ_0 and Δ_1 is unnecessary. Give, therefore, the revised definition of $\langle x, y\rangle$ for elements, and prove that for a single system $\mathcal{D}$, there exists an approximable mapping

$$\mathrm{diag} : \mathcal{D} \to \mathcal{D} \times \mathcal{D}$$

where $\mathrm{diag}(x) = \langle x, x\rangle$ for all $x \in |\mathcal{D}|$. Also extend the definition to a product of n-factors

$$\mathcal{D}_0 \times \mathcal{D}_1 \times \cdots \times \mathcal{D}_{n-1}$$

which will be a system over the set

$$\bigcup_{i<n} 1^i 0 \Delta_i.$$

Note that for a 2-termed product we simplify $10\Delta_1$ to $1\Delta_1$.

3.82.2 AI: Human-English to AI-Lean

Exercise_3_14.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Exercise_3_14.lean

3.83 Exercise 3.15

3.83.1 Human-English

EXERCISE 3.15. Establish the usual isomorphisms:

(i) $\mathcal{D}_0 \times \mathcal{D}_1 \cong \mathcal{D}_1 \times \mathcal{D}_0$;

(ii) $\mathcal{D}_0 \times (\mathcal{D}_1 \times \mathcal{D}_2) \cong (\mathcal{D}_0 \times \mathcal{D}_1) \times \mathcal{D}_2 \cong \mathcal{D}_0 \times \mathcal{D}_1 \times \mathcal{D}_2$.

How does the product of no factors fit in? Prove also:

(iii) $\mathcal{D}_0 \cong \mathcal{D}'_0$ and $\mathcal{D}_1 \cong \mathcal{D}'_1$ imply $\mathcal{D}_0 \times \mathcal{D}_1 \cong \mathcal{D}'_0 \times \mathcal{D}'_1$.

3.83.2 AI: Human-English to AI-Lean

Exercise_3_15.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Exercise_3_15.lean

3.84 Exercise 3.16

3.84.1 Human-English

EXERCISE 3.16. Let $\mathcal{D}$ be a given neighbourhood system over $\Delta \subseteq \Sigma^*$. Define

$$\Delta^\infty = \bigcup_{n=0}^{\infty} 1^n 0 \Delta,$$

so that Δ^∞ is split into infinitely many disjoint copies of Δ. Let $\mathcal{D}^\infty$ be the least family of subsets of Σ^* where

1. $\Delta^\infty \in \mathcal{D}^\infty$, and
2. whenever $X \in \mathcal{D}$ and $Y \in \mathcal{D}^\infty$, then $0X \cup 1Y \in \mathcal{D}^\infty$.

Show that $\mathcal{D}^\infty$ is a neighbourhood system over Δ^∞. Prove the isomorphism

$$\mathcal{D}^\infty \cong \mathcal{D} \times \mathcal{D}^\infty.$$

Show, moreover, that the elements of $|\mathcal{D}^\infty|$ are in a one-one correspondence with arbitrary infinite sequences $\langle x_n \rangle_{n=0}^\infty$ of elements $x_n \in |\mathcal{D}|$ by using combinations of neighbourhoods

$$0X_0 \cup 10X_1 \cup \cdots \cup 1^n 0X_n \cup \cdots,$$

where from some point on all the X_m are equal to Δ.

3.84.2 AI: Human-English to AI-Lean

Exercise_3_16.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Exercise_3_16.lean

3.85 Exercise 3.17

3.85.1 Human-English

EXERCISE 3.17. Using the $\mathcal{B}$ and $\mathcal{T}$ of Example 2.3 show there is a one-one approximable mapping

$$f : \mathcal{B} \to \mathcal{T}^\infty$$

and another approximable mapping

$$g : \mathcal{T}^\infty \to \mathcal{B}$$

such that

$$g \circ f = I_{\mathcal{B}} \quad \text{and} \quad f \circ g \subseteq I_{\mathcal{T}^\infty}.$$

Are $\mathcal{B}$ and $\mathcal{T}^\infty$ isomorphic? Are $\mathcal{B}$ and $\mathcal{T} \times \mathcal{B}$ isomorphic?

3.85.2 AI: Human-English to AI-Lean

Exercise_3_17.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Exercise_3_17.lean

3.86 Exercise 3.18

3.86.1 Human-English

EXERCISE 3.18. Let $\mathcal{D}_0$ and $\mathcal{D}_1$ be neighbourhood systems over Δ_0 and Δ_1, where we again assume that these are subsets of Σ^*. We assume that in addition *no neighbourhood is empty*. Why is this possible without loss of generality?

Define the *sum system* by:

$$\mathcal{D}_0 + \mathcal{D}_1 = \{\{\Lambda\} \cup 0\Delta_0 \cup 1\Delta_1\} \cup \{0X \mid X \in \mathcal{D}_0\} \cup \{1Y \mid Y \in \mathcal{D}_1\}.$$

Prove that this is a neighbourhood system over $\{\Lambda\} \cup 0\Delta_0 \cup 1\Delta_1$. (Throwing in $\{\Lambda\}$ was not all that necessary, but note that $\mathcal{B} = \mathcal{B} + \mathcal{B}$, and this is an equality of sets not just an isomorphism of systems.)

Prove that in general there are mappings

$$in_i : \mathcal{D}_i \to \mathcal{D}_0 + \mathcal{D}_1 \quad \text{and} \quad out_i : \mathcal{D}_0 + \mathcal{D}_1 \to \mathcal{D}_i,$$

where $out_i \circ in_i = I_{\mathcal{D}_i}$. Where does the assumption $\emptyset \notin \mathcal{D}_i$ come in? How can these sums be generalized to n-terms? (Hint: As for products use sets $1^i 0\Delta_i$.) Draw some pictures.

3.86.2 AI: Human-English to AI-Lean

Exercise_3_18.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Exercise_3_18.lean

3.87 Exercise 3.19

3.87.1 Human-English

EXERCISE 3.19. Suppose we are given systems and approximable mappings

$$f : \mathcal{D}_0 \to \mathcal{D}'_0 \quad \text{and} \quad g : \mathcal{D}_1 \to \mathcal{D}'_1.$$

Prove there are approximable mappings

$$f \times g : \mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}'_0 \times \mathcal{D}'_1 \quad \text{and} \quad f + g : \mathcal{D}_0 + \mathcal{D}_1 \to \mathcal{D}'_0 + \mathcal{D}'_1$$

such that

(i) $(f \times g)(x, y) = \langle f(x), g(y) \rangle$ for all $x \in |\mathcal{D}_0|$ and $y \in |\mathcal{D}_1|$, and rewrite this as:

(ii) $f \times g = \langle f \circ p_0, g \circ p_1 \rangle$.

In addition prove that

(iii) $out_0 \circ (f + g) \circ in_0 = f$, and

(iv) $out_1 \circ (f + g) \circ in_1 = g$.

Do equations (iii) and (iv) uniquely determine $f + g$?

3.87.2 AI: Human-English to AI-Lean

Exercise_3_19.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Exercise_3_19.lean

3.88 Exercise 3.20

3.88.1 Human-English

EXERCISE 3.20. (For category theorists). Show that the result of 3.19 can be used to prove that $+$ and $\times$ on the category of domains and approximable maps are indeed functors. Show further that $\times$ is the categorical product for this category.

3.88.2 AI: Human-English to AI-Lean

Exercise_3_20.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Exercise_3_20.lean

3.89 Exercise 3.21

3.89.1 Human-English

EXERCISE 3.21. In the proofs of 3.12 in the definition of curry (g) it is rather cavalierly assumed that the neighbourhood $[Y, Z]$ uniquely determines Y and Z. Show that this is true if $Z \neq \Delta_2$. (Hint: Find explicitly the least of $f \in [Y, Z]$.) Show that if $Z = \Delta_2$ the biconditional stated at the start of the proof is still valid even though Y is not uniquely determined. (Hint: Remember that $\Delta_1\ g\ \Delta_2$ must hold.) For arbitrary pairs of neighbourhoods of $(D_1 \to D_2)$ is there a simple criterion for identity?

3.89.2 AI: Human-English to AI-Lean

Exercise_3_21.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Exercise_3_21.lean

3.90 Exercise 3.22

3.90.1 Human-English

EXERCISE 3.22. Prove that there is an approximable mapping

$$\text{comp} : (D_1 \to D_2) \times (D_0 \to D_1) \to (D_0 \to D_2)$$

where for all $g : D_1 \to D_2$ and $f : D_0 \to D_1$ we have

$$\text{comp}(g, f) = g \circ f.$$

Show this directly by writing down the neighbourhood relation and by building the mapping up from eval and curry (on suitable domains) using $\circ$ and $\langle , \rangle$. (Hint: Fill in maps in the following sequence of domains:

1. $(D_0 \to D_1) \times D_0 \to D_1$
2. $(D_1 \to D_2) \times ((D_0 \to D_1) \times D_0) \to (D_1 \to D_2) \times D_1$
3. $((D_1 \to D_2) \times (D_0 \to D_1)) \times D_0 \to (D_1 \to D_2) \times D_1$
4. $((D_1 \to D_2) \times (D_0 \to D_1)) \times D_0 \to D_2$
5. $(D_1 \to D_2) \times (D_0 \to D_1) \to (D_0 \to D_2)$.

The maps are of course not uniquely determined, but the shifting of brackets ought to suggest the right choice.)

3.90.2 AI: Human-English to AI-Lean

Exercise_3_22.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Exercise_3_22.lean

3.91 Exercise 3.23

3.91.1 Human-English

EXERCISE 3.23. (For category theorists.) Show that the results of 3.11 and 3.12 prove that the category of domains and approximable mappings is a *cartesian closed category*. (Mac Lane [1971] pp. 95–96 may be consulted for a very brief introduction.) What is the *terminal domain* in this category? What sort of functor is $(D_0 \to D_1)$?

3.91.2 AI: Human-English to AI-Lean

Exercise_3_23.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Exercise_3_23.lean

3.92 Exercise 3.24

3.92.1 Human-English

EXERCISE 3.24. Establish some more isomorphisms :

(i) $(D_0 \to (D_1 \times D_2)) \cong (D_0 \to D_1) \times (D_0 \to D_2)$

(ii) $(D_0 \to D_1^\infty) \cong (D_0 \to D_1)^\infty$

(iii) $D_0 \times (D_1 + D_2) \cong (D_0 \times D_1) + (D_0 \times D_2)$

(iv) $(D_0 + D_1) \to D_2 \cong (D_0 \to D_2) \times (D_1 \to D_2) \ldots$

If some of the above are not true, perhaps at least some mapping relationships can be established.

3.92.2 AI: Human-English to AI-Lean

Exercise_3_24.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Exercise_3_24.lean

3.93 Exercise 3.25

3.93.1 Human-English

EXERCISE 3.25. (For topologists.) Recall from Exercises 1.21 and 2.13 on how to regard a domain $|D|$ as a topological space. Using 3.10 show that the family of open subsets of $|D|$ is isomorphic to a domain.

3.93.2 AI: Human-English to AI-Lean

Exercise_3_25.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Exercise_3_25.lean

3.94 Exercise 3.26

3.94.1 Human-English

EXERCISE 3.26. Show that for every domain D there is an approximable mapping

$$\mathrm{cond} : T \times D \times D \to D,$$

called the *conditional operator*, satisfying

(i) $\mathrm{cond}(\mathrm{true}, x, y) = x$

(ii) $\mathrm{cond}(\mathrm{false}, x, y) = y$

(iii) $\mathrm{cond}(\bot, x, y) = \bot$.

(Hint: Recalling that $T = \{\{0\}, \{1\}, \{0, 1\}\}$, define cond as a relation by

$$\begin{aligned} 0C \cup 10X \cup 110Y \ \mathrm{cond}\ Z \quad \text{iff} \quad & 0 \in C \text{ and } X \subseteq Z \text{ or} \\ & 1 \in C \text{ and } Y \subseteq Z \text{ or} \\ & 0, 1 \in C \text{ and } \Delta \subseteq Z, \end{aligned}$$

where $C \in T$ and $X \in D$ and $Y \in D$ and where we are using the construction of Exercise 3.14.) Find a similar operator in the domain

$$T \times D_0 \times D_1 \to D_0 + D_1.$$

Show also there is an approximable mapping

$$\text{which} : D_0 + D_1 \to T$$

such that for all $x \in |D_0 + D_1|$

$$\text{cond}(\text{which}(x), \text{in}_0(\text{out}_0(x)), \text{in}_1(\text{out}_1(x))) = x.$$

3.94.2 AI: Human-English to AI-Lean

Exercise_3_26.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Exercise_3_26.lean

3.95 Exercise 3.27

3.95.1 Human-English

EXERCISE 3.27. (For set theorists.) Give another proof that the family of approximable mappings $f : D_0 \to D_1$ is isomorphic to a domain by employing the general argument of Exercise 2.22. How does this compare with the proof method of 3.9 and 3.10? Can the general remarks also be employed to show that

$$\text{eval} : (D_1 \to D_2) \times D_1 \to D_2$$

is approximable without bringing in the neighbourhoods in such an explicit way? (Hint: Use 3.5 and the idea of Exercise 2.12.)

3.95.2 AI: Human-English to AI-Lean

Exercise_3_27.lean

Lean source: DomainTheory/NeighbourhoodSystems/DomainConstructs/Exercise_3_27.lean

3.96 Exercise 3.28

3.96.1 Human-English

EXERCISE 3.28. In the function space $(D_0 \to D_1)$ let

$$\bigcap\{[X_i, Y_i] \mid i < n\}$$

be a (non-empty) neighbourhood. In 3.9 the minimal element of this neighbourhood is characterized as a relation f_0. Show that as an elementwise mapping it can be defined by the formula

$$f_0(x) = \bigsqcup\{\uparrow Y_i \mid x \in [X_i]\},$$

for $x \in |D_0|$. Try to draw a picture of $|D_0|$ with neighbourhoods $[X_i]$ and the corresponding values of the function f_0.

3.97 LECTURE IV

FIXED POINTS AND RECURSION

Having at this point a large supply of examples of domains (and further constructs of new domains), we now have to consider some other ways of defining functions — other than by explicit compositions of the very basic functions already mentioned. One of the most fruitful techniques is an infinitely iterated composition that is at the back of the idea of recursion. We will use the process over and over again in these lectures, not only to define new functions but also to define new domains. The heart of the matter lies in the so-called "Fixed-point Theorem":

3.97.1 AI: Human-English to AI-Lean

`Exercise_3_28.lean`

Lean source: `DomainTheory/NeighbourhoodSystems/DomainConstructs/Exercise_3_28.lean`

3.98 Fixed points and recursion

Dependency diagram. Each box is one item. The arrowhead is on the item that imports. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it is not shown. Blue is a definition, amber an example, red a theorem, and indigo an exercise.

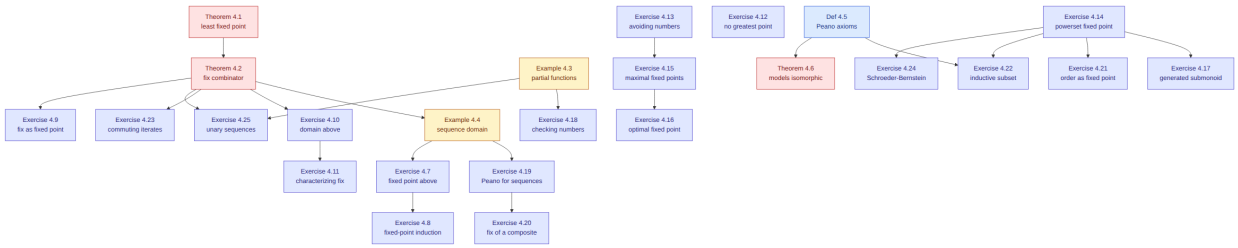


Figure 19: Fixed points and recursion.

3.99 Introduction

3.99.1 Human-English

3.100 LECTURE IV

FIXED POINTS AND RECURSION

Having at this point a large supply of examples of domains (and further constructs of new domains), we now have to consider some other ways of defining functions — other than by explicit compositions of the very basic functions already mentioned. One of the most fruitful techniques is an infinitely iterated composition that is at the back of the idea of recursion. We will use the process over and over again in these lectures, not only to define new functions but also to define new domains. The heart of the matter lies in the so-called "Fixed-point Theorem":

3.101 Theorem 4.1

3.101.1 Human-English

THEOREM 4.1. For any approximable mapping $f : D \to D$ on any domain, there exists a least element $x \in |D|$ where

$$f(x) = x.$$

Proof: Let f^n for $n \in \mathbf{N}$ stand for the n-fold composition of f with itself. That is,

$$f^0 = I_D, \text{ and}$$

$$f^{n+1} = f \circ f^n.$$

Define

$$x = \{X \in D \mid \Delta \; f^n \; X, \text{ for some } n \in \mathbf{N}\}.$$

We see $X \in x$ iff there is a finite sequence $\Delta = X_0, X_1, \ldots, X_n = X$ where $X_i \; f \; X_{i+1}$ holds for all $i < n$. Now since $\Delta \; f \; \Delta$ automatically holds, a sequence for an $X \in x$ can always be extended to a longer sequence just by adding more Δ's on the front.

We want to prove $x \in |D|$. Clearly $\Delta \in x$; and if $X \subseteq Y$ and $X \in x$, then $Y \in x$. All that remains to be shown is the closure of x under intersection. Note that if

$$U \; f \; V \quad \text{and} \quad U' \; f \; V'$$

hold and U, U' are consistent in D, then V and V' are consistent and
$(U \cap U') \; f \; (V \cap V')$
must hold. Generalizing this to sequences, if

$$\Delta = X_0 \; f \; X_1 \; f \; \cdots \; f \; X_n = X, \text{ and}$$

$$\Delta = Y_0 \; f \; Y_1 \; f \; \cdots \; f \; Y_n = Y$$

both hold (and note we have arranged the lengths of the two sequences to be equal), then each pair X_i, Y_i is consistent and we have

$$\Delta = (X_0 \cap Y_0) \; f \; (X_1 \cap Y_1) \; f \; \cdots \; f \; (X_n \cap Y_n) = X \cap Y.$$

This establishes the desired closure.

We also note that if $X \in x$ and $X \; f \; Y$ then $Y \in x$. Therefore, $f(x) \subseteq x$ and indeed by its very construction x is the *least* element of $|D|$ with this property. (Why?) But f is monotone, so $f(f(x)) \subseteq f(x)$; hence, $x = f(x)$. By what we have already said it must be the least such element. $\square$

Because the element we have shown to exist in 4.1 is a least element, it is unique. That is, we have associated with each $f : D \to D$ a special element $x_f \in |D|$ determined by the choice of f. A function has therefore been defined mapping the set $|D \to D|$ into $|D|$. The next result shows that this function, or operator on functions, is in fact approximable.

3.101.2 AI: Human-English to AI-Lean

Theorem_4_1.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Theorem_4_1.lean

3.102 Theorem 4.2

3.102.1 Human-English

THEOREM 4.2. For any domain D, there is an approximable mapping

$$\mathrm{fix} : (D \to D) \to D$$

such that if $f : D \to D$ is any approximable mapping, then

(i) $\mathrm{fix}(f) = f(\mathrm{fix}(f))$.

Furthermore, if $x \in |D|$, then

(ii) $f(x) \subseteq x$ implies $\mathrm{fix}(f) \subseteq x$.

And this last property implies that fix is unique. Explicitly we can characterize fix by the equation:

(iii)

$$\mathrm{fix}(f) = \bigcup_{n=0}^{\infty} f^n(\bot),$$

for all $f : D \to D$.

Proof: Formula (iii) can be put in a more elementary form:

$$\mathrm{fix}(f) = \{X \mid \Delta f^n X, \text{ for some } n \in \mathbf{N}\}.$$

To show an elementwise mapping approximable we can use the formula of Exercise 2.9, applied to the above as the definition of fix:

$$(*) \quad \mathrm{fix}(f) = \bigcup\{\mathrm{fix}(\uparrow F) \mid f \in [F]\},$$

where F ranges over the neighbourhoods of $(D \to D)$, and where $\uparrow F$ can be considered to be the least element of F as calculated in 3.9.

Now from the definition of fix, it is clear that whenever $f \subseteq g$, then $\mathrm{fix}(f) \subseteq \mathrm{fix}(g)$, because $f^n \subseteq g^n$. (That is, fix is obviously monotone.) Next, if $f \in F$, then $\uparrow F$ is a (finite) approximation to f; so $\uparrow F \subseteq f$ and $\mathrm{fix}(\uparrow F) \subseteq \mathrm{fix}(f)$. This means that half of equation (*) already holds by monotonicity. All that is left is to prove the other half.

So suppose $X \in \mathrm{fix}(f)$. Then, as we have already remarked, there is a finite sequence of neighbourhoods where

$$\Delta = X_0 \; f \; X_1 \; \ldots \; X_{n-1} \; f \; X_n = X.$$

Let the function-space neighbourhood be defined as

$$F = \bigcap\{[X_i, X_{i+1}] \mid i < n\},$$

and note that since $f \in [F]$ we have at once consistency. But, by 3.9, $\uparrow F \in [F]$, so the *same* sequence of X_i is sufficient to show that

$$X \in \mathrm{fix}(\uparrow F).$$

In other words, if X belongs to the left-hand side of (*), it also belongs to the right-hand side. This completes the proof of (*).

Formula (i) is just a restatement of what we proved in 4.1. And (ii) follows easily, because $f(x) \subseteq x$ implies that $\Delta \in x$ and whenever $X \in x$ and $X\ f\ Y$, then $Y \in x$. Thus, by induction, if $\Delta f^n X$, then $X \in x$. So $\mathrm{fix}(f) \subseteq x$.

Finally, if $\mathrm{fax} : (D \to D) \to D$ were any other operator satisfying (i) and (ii), we would prove at once that

$$\mathrm{fix}(f) \subseteq \mathrm{fax}(f) \quad \text{and}$$

$$\mathrm{fax}(f) \subseteq \mathrm{fix}(f).$$

That is to say, the two operators are identical. □

The reader may have noticed that we used recursion in the proof of 4.1 (we had to define f^n for all $n \in \mathbf{N}$). But 4.1 and 4.2 can be used to justify definitions by recursion on a large number of domains — definitions where the process of iteration is far from being as straightforward. In discussing this point, let us start with some basic examples.

3.102.2 AI: Human-English to AI-Lean

Theorem_4_2.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Theorem_4_2.lean

3.103 Example 4.3

3.103.1 Human-English

EXAMPLE 4.3. The infinite generalization of our original example 1.2 is the system

$$N = \{\{n\} \mid n \in \mathbf{N}\} \cup \{\mathbf{N}\}.$$

The total elements are clearly in a one-one correspondence with the integers in $\mathbf{N}$. We can apply the construction of Exercise 3.16 to obtain a domain

$$F = N^{\infty}.$$

So we already know quite a bit about this domain — but it has a much more familiar presentation.

Let Φ be the set of all *finite partial functions* $\varphi \subseteq \mathbf{N} \times \mathbf{N}$ (that is, finite sets of ordered pairs of integers where, if $(n, m) \in \varphi$ and $(n, m') \in \varphi$, then $m = m'$). Define

$$\uparrow \varphi = \{\psi \in \Phi \mid \varphi \subseteq \psi\}.$$

Consider the neighbourhood system

$$F' = \{\uparrow \varphi \mid \varphi \in \Phi\}.$$

It is an easy exercise to show that F and F' are isomorphic and that the elements of these domains correspond exactly to the (possibly infinite) *partial functions* $\pi \subseteq \mathbf{N} \times \mathbf{N}$. Moreover, the *total* elements just correspond to the *total* functions $\tau : \mathbf{N} \to \mathbf{N}$ ("function" in the ordinary, set-theoretical sense of the word).

Another easy exercise is to show that the domains

$$F \text{ and } (\mathbf{N} \to \mathbf{N})$$

by our definitions are *NOT* isomorphic; though the two domains are closely related. We can define a mapping

$$\text{val} : F \times N \to N$$

by the relationship

$$\uparrow \phi \cup \{n\} \text{ val } \{m\} \quad \text{iff} \quad (n, m) \in \phi.$$

(Of course val has to relate other neighbourhoods such as:

$$\uparrow \phi \cup N \text{ val } N,$$

but these are all.) It is then simple to prove that if $\pi \in |F|$ is regarded as a partial function $\pi : N \to N$ and if for $n \in N$ we define $\hat{n} \in |N|$ by

$$\hat{n} = \{\{n\}, N\},$$

then we have

$$\text{val}(\pi, \hat{n}) = \widehat{\pi(n)}, \text{ if } \pi \text{ is defined at } n;$$

$$= \{N\}, \text{ otherwise.}$$

(Remember that $\{N\} \in |N|$ is the "undefined" element.) This means that

$$\text{curry}(\text{val}) : F \to (N \to N)$$

is a one-one function on elements. (The rather slight trouble with $(N \to N)$ is that it has *more* elements than F.)

So much for the construction of F, we now wish to consider mappings

$$f : F \to F$$

and their uses. Consider the possibility

$$f(\pi)(n) = 0, \qquad \text{if } n = 0;$$

$$= \pi(n-1) + n - 1, \text{ if } n > 0.$$

If π were a total function, then $f(\pi)$ would be total. But if π is partial, and if it is, say, undefined at k, then $f(\pi)$ becomes undefined at $k+1$. Note that $f(\pi)$ is always defined at 0. Note, too, that f is an approximable mapping because it is completely determined by what it does to finite (partial) functions. Indeed,

$$f(\pi) = \bigcup\{f(\phi) \mid \phi \subseteq \pi\},$$

where ϕ ranges over Φ.

Well, we have proved that every approximable map of a domain into itself has a (*least*) fixed point. What is the least fixed point of this f? Suppose $\sigma = f(\sigma)$. Then $\sigma(0) = 0$, and

$$\sigma(n+1) = f(\sigma)(n+1)$$

$$= \sigma(n) + n.$$

By induction, then

$$\sigma(n) = \sum_{i<n} i$$

and σ is a total function. (Therefore, f has a *unique* fixed point.)

Actually, we can make the procedure more systematic by defining as fixed points elements of $(N \to N)$ rather than F. In the first place we have $\hat{0} \in |N|$, and from now on we will not distinguish between n and $\hat{n}$. Next we have two mappings:

$$\text{succ}, \text{pred} : N \to N$$

where, as approximable mappings we have

$$X \text{ succ } Y \text{ iff } \exists n \in N.\ n \in X \text{ and } n+1 \in Y,$$

$$X \text{ pred } Y \text{ iff } \exists n \in N.\ n+1 \in X \text{ and } n \in Y,$$

for all $X, Y \in N$. This is *correct*, but what we mean in more understandable terms is:

$$\text{succ}(n) = n + 1;$$

$$\text{pred}(n) = n - 1, \text{ if } n > 0;$$

$$= \bot, \text{ if } n = 0.$$

Here, n has been identified with $\hat{n} \in |N|$ and $\bot = \{N\} \in |N|$. Moreover, we have a mapping

$$\text{zero} : N \to T$$

which is such that

$$\mathrm{zero}(n) = \text{true, if } n = 0;$$

$$= \text{false, if } n > 0.$$

The *structured domain*

$$\langle N, 0, \mathrm{succ}, \mathrm{pred}, \mathrm{zero}\rangle$$

can be called "THE domain of integers" for our present theory. We shall meet many other structured domains in the sequel.

Now the iterated summation function σ can be completely characterized — as a map $\sigma : N \to N$ rather than as an element $\sigma \in |F|$ — by the following equation:

$$\sigma(n) = \mathrm{cond}(\mathrm{zero}(n),\ 0,\ \sigma(\mathrm{pred}(n)) + \mathrm{pred}(n)).$$

The only problem is that we have not defined $+ : N \times N \to N$. (A direct definition is left to the reader; general remarks are given later.) But $+$ could be any function of two variables in order to make the point about the form of the definition of σ. Remember

$$\mathrm{cond} : T \times N \times N \to N,$$

as defined in Exercise 3.26. We do not put cond in as part of the structure of N because (as should be clear from 3.26) it is part of the structure of T.

The above equation for σ is properly called a *functional equation*; it will be written as a fixed-point equation in Lecture V when we have the notation for the λ-calculus. □

3.103.2 AI: Human-English to AI-Lean

Example_4_3.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Example_4_3.lean

3.104 Example 4.4

3.104.1 Human-English

EXAMPLE 4.4. The domain C of finite or infinite binary sequences mentioned in Exercise 2.21 may be regarded as a generalization of N. This can be made plain by saying how we wish to regard C as a structured domain. To do this we should recall what C is as a neighbourhood system. In the first place

$$B = \{\sigma\Sigma^* \mid \sigma \in \Sigma^*\}$$

where $\Sigma = \{0, 1\}$. To form the system C we have

$$C = B \cup \{\{\sigma\} \mid \sigma \in \Sigma^*\}.$$

The total elements of B correspond to *infinite binary sequences*; while the total elements of C to *finite or infinite sequences*. To simplify notation let us write for $\sigma \in \Sigma^*$

$$\sigma = \uparrow \{\sigma\} \quad \text{(a total element);}$$

$$\sigma \perp = \uparrow \sigma\Sigma^* \quad \text{(a partial element).}$$

In other words we identify σ with the corresponding total element in $|C|$.

We wish now to think of C as a structured domain seen as a kind of generalization of N. The empty sequence Λ will play the rôle of $0 \in |N|$; the map succ has two different analogues for C, however. Just as for B we define for $x \in |C|$ and $\sigma \in \Sigma^*$:

$$\sigma x = \{Y \mid \sigma X \subseteq Y \text{ some } X \in x\},$$

where of course now X and Y range over C. It should be checked that $\sigma\tau$ has the right meaning whether we think of $\tau \in \Sigma^*$ or $\tau \in |C|$. The two "successor" mappings we are looking for are

$$x \mapsto 0x \quad \text{and} \quad x \mapsto 1x.$$

All the maps $x \mapsto \sigma x$ can be obtained as compositions of these iterated as many times as needed.

Here are two questions which we now should ask:

What plays the rôle of pred?

The mapping will be called **tail**, and it is characterized by:

$$\text{tail}(0x) = x,$$

$$\text{tail}(1x) = x, \text{ and}$$

$$\text{tail}(\Lambda) = \perp .$$

It is left to the reader to show that **tail** exists as an approximable mapping.

What plays the rôle of zero?

The answer is not unique, because in C there are several distinctions that have to be made; in fact we will define three maps:

$$\text{empty}, \text{zero}, \text{one} : C \to T$$

where the three maps take on truth-values to distinguish various kinds of elements in $|C|$ as follows:

$$\begin{aligned}
\text{empty}\,(\Lambda) &= \text{true},\\
\text{empty}\,(0x) &= \text{false},\\
\text{empty}\,(1x) &= \text{false},\\
\text{zero}\,(\Lambda) &= \text{false}\\
\text{zero}\,(0x) &= \text{true}\\
\text{zero}\,(1x) &= \text{false}\\
\text{one}\,(\Lambda) &= \text{false}\\
\text{one}\,(0x) &= \text{false}\\
\text{one}\,(1x) &= \text{true}.
\end{aligned}$$

Again, it is an exercise to show these are approximable. The structured domain is therefore

$$\langle C, \Lambda, 0, 1, \mathrm{tail}, \mathrm{empty}, \mathrm{zero}, \mathrm{one}\rangle.$$

Note that we have changed the meaning of some of the symbols in passing from N to C. Note too that there is a confusion between 0 as an element and 0 as the map $x \mapsto 0x$. There are just too few symbols! In any case this is only an example and not a philosophy of life, so the reader can be expected not to suffer too much.

An example of a definition of an *element* of $|C|$ by a fixed-point equation is:

$$a = 0\,1\,a.$$

This equation has one and only one solution in $|C|$, the infinite sequence that alternates 0's and 1's. Note that a is also characterized by:

$$a = 0101a.$$

Another element is

$$b = 010\,b,$$

which is quite different from a.

An example of a *map* in $|C \to C|$ has the characterization

$$\begin{aligned} d(\Lambda) &= \Lambda \\ d(0x) &= 00d(x), \quad \text{and} \\ d(1x) &= 11d(x). \end{aligned}$$

We can write:

$$\begin{aligned} d(x) = \mathrm{cond}(&\mathrm{empty}(x),\ \Lambda, \\ &\mathrm{cond}(\mathrm{zero}(x),\ 00d(\mathrm{tail}(x)),\ 11d(\mathrm{tail}(x))))). \end{aligned}$$

As we shall see in due course, this can be regarded as a fixed-point definition of d.

An example of a map in $|C \times C \to C|$ was suggested in 2.21. We can write:

$$\begin{aligned} xy = \mathrm{cond}(&\mathrm{empty}(x),\ y, \\ &\mathrm{cond}(\mathrm{zero}(x),\ 0(\mathrm{tail}(x)\,y),\ 1(\mathrm{tail}(x)\,y))). \end{aligned}$$

It should be checked that this equation exactly characterizes the intended mapping. □

The examples we have given with N and C are examples of definitions of functions by *recursion*. The literal meaning of "recursion" is "running backwards", and a look at the equations for our examples will show that the functions are characterized by giving their values either *outright* (e.g. at 0 or at Λ) or at *earlier* arguments (e.g. at $\mathrm{pred}(x)$ or at $\mathrm{tail}(x)$). The reader should keep in mind that a recursive "definition" is not really a definition in the sense of *explicit definition* but rather is a characterization; a theorem has to be proved to show that such functions exist. Now we have a general definition of domain and a general theorem on fixed points and a general construction of function-space domain; THEREFORE, we know that there are solutions to our equations PROVIDED THAT the variables range over elements of a domain and that the other, given functions that appear in the equations are already known to be approximable (continuous). This proviso is very important, and we shall remark on it time after time.

But, as is well known, recursion also can be done over sets like $\mathbf{N}$, and we should examine now the connection between the familiar kind of recursion and what we are doing over domains. Of course, one simple connection is already provided by the way we regard $\mathbf{N}$ as a subset of N. But there are other useful connections that can be employed in a way that may seem more direct.

3.104.2 AI: Human-English to AI-Lean

Example_4_4.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Example_4_4.lean

3.105 Definition 4.5

3.105.1 Human-English

DEFINITION 4.5. A structured set $\langle \mathbf{N}, 0, {}^+ \rangle$, where $0 \in \mathbf{N}$ and ${}^+ : \mathbf{N} \to \mathbf{N}$ is a unary function, is said to be a *model for Peano's Axioms* if the following conditions are satisfied:

(i) $0 \neq n^+$, for all $n \in \mathbf{N}$;

(ii) $n^+ = m^+$ implies $n = m$, for all $n, m \in \mathbf{N}$;

(iii) whenever $x \subseteq \mathbf{N}$ and $0 \in x$ and $x^+ \subseteq x$, then $x = \mathbf{N}$.

Here $x^+ = \{n^+ \mid n \in x\}$. $\square$

Clause (iii) is recognized as the principle of mathematical induction stated in terms of sets. We usually think of $\mathbf{N}$ as being "God given", and (i)–(iii) as known without question. Suppose God, however, decides to withdraw His set of integers and substitute another. We can ask: "Oh! Why did You take from us our beloved numbers? Why must we now live with these strange new beasts?" God will probably reply "Trust Me!" Perhaps we should in view of the theorem:

3.105.2 AI: Human-English to AI-Lean

Definition_4_5.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Definition_4_5.lean

3.106 Theorem 4.6

3.106.1 Human-English

THEOREM 4.6. All models of Peano's Axioms are isomorphic.

Proof: There are several ways to give the proof, but, for the sake of illustration, an application of the fixed-point theorem is appropriate here. Let $\langle \mathbf{N}, 0, {}^+ \rangle$ be one model, and let $\langle \mathbf{M}, \square, {}^\# \rangle$ be another. Let $\mathbf{N} \times \mathbf{M}$ be the ordinary cartesian product of the two sets and let

$$P(\mathbf{N} \times \mathbf{M})$$

be the powerset (set of all subsets) of $\mathbf{N} \times \mathbf{N}$. As in Exercises 1.15 and 2.20, we regard this set of elements as a domain, whose finite elements are just the finite subsets of the given set $\mathbf{N} \times \mathbf{M}$. The following mapping on $u \subseteq \mathbf{N} \times \mathbf{M}$ is easily proved approximable:

$$u \mapsto \{(0, \Box)\} \cup \{(n^+, m^\#) \mid (n, m) \in u\}.$$

(This assertion should be checked as an exercise.) We thus let r be the (least) fixed point:

$$r = \{(0, \Box)\} \cup \{(n^+, m^\#) \mid (n, m) \in r\}.$$

This $r \subseteq \mathbf{N} \times \mathbf{M}$ as a binary relation will turn out to be a one-one correspondence giving the required isomorphism.

First of all we see by construction that

(i) $0\ r\ \Box$;

(ii) $n\ r\ m$ implies $n^+\ r\ m^\#$.

So, if r proves to be a one-one correspondence, it will then be the desired isomorphism. Now, the two sets shown in the equation

$$\{(0, \Box)\} \cap \{(n^+, m^\#) \mid (n, m) \in r\} = \emptyset$$

are disjoint by virtue of axiom 4.5(i). Therefore, 0 in $\mathbf{N}$ corresponds by r to one and only one element of $\mathbf{M}$, namely the element $\Box$. Let $x \subseteq \mathbf{N}$ be the set of all elements of $\mathbf{N}$ corresponding by r to a unique element of $\mathbf{M}$. We have just shown $0 \in x$. Suppose $n \in x$, and let $m \in \mathbf{M}$ be the unique element with $n\ r\ m$. Now $n^+\ r\ m^\#$ holds, so n^+ corresponds to at least one element of $\mathbf{M}$. If $n^+\ r\ k$ also holds, then since $(n^+, k) \neq (0, \Box)$, the fixed-point equation implies

$$n^+ = n_0^+ \quad \text{and} \quad k = m_0^\#$$

for some $(n_0, m_0) \in r$. By axiom 4.5(ii), $n = n_0$, and, by uniqueness (remember $n \in x$), $m = m_0$; thus, $m^\#$ is the unique correspondent for n^+. We have proved $n^+ \in x$. Therefore, $x^+ \subseteq x$; so by axiom 4.5(iii), $x = \mathbf{N}$ holds. Otherwise said, every element in $\mathbf{N}$ corresponds to a unique element of $\mathbf{M}$.

Note that the rôles of $\mathbf{N}$ and $\mathbf{M}$ are completely symmetric, *and* they satisfy the same axioms as structured sets. It follows, then, that every element of $\mathbf{M}$ corresponds to a unique element of $\mathbf{N}$. The proof that r is a one-one correspondence is now complete. $\Box$

3.106.2 AI: Human-English to AI-Lean

`Theorem_4_6.lean`

Lean source: `DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Theorem_4_6.lean`

3.107 Lecture IV exercises

3.107.1 Human-English

3.107.2 EXERCISES

3.108 Exercise 4.7

3.108.1 Human-English

EXERCISE 4.7. Formula 4.2(iii) shows how to find the *least* fixed point of $f : D \to D$. Suppose on the other hand that $a \in |D|$ is such that $a \subseteq f(a)$. Will there be a fixed point $x = f(x)$ with $a \subseteq x$?

(Hint: How do we know $\bigsqcup_{n=0}^{\infty} f^n(\bot) \in |D|$?)

3.108.2 AI: Human-English to AI-Lean

Exercise_4_7.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_7.lean

3.109 Exercise 4.8

3.109.1 Human-English

EXERCISE 4.8. Suppose $f : D \to D$ and $S \subseteq |D|$ are such that

(i) $\bot \in S$;

(ii) $x \in S$ always implies $f(x) \in S$;

(iii) whenever $\{x_n\}_{n=0}^{\infty} \subseteq S$ and $x_n \sqsubseteq x_{n+1}$ for all n, then $\bigsqcup_{n=0}^{\infty} x_n \in S$.

Conclude that $\mathrm{fix}(f) \in S$. (This could be called the principle of *fixed-point induction*.) Apply the method to a set of the form

$$S = \{x \in |D| \mid a(x) = b(x)\},$$

where $a, b : D \to D$ are approximable, and where we know $a(\bot) = b(\bot)$, and $f \circ a = a \circ f$ and $f \circ b = b \circ f$.

3.109.2 AI: Human-English to AI-Lean

Exercise_4_8.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_8.lean

3.110 Exercise 4.9

3.110.1 Human-English

EXERCISE 4.9. Show that there is an approximable operator

$$\Psi : ((D \to D) \to D) \to ((D \to D) \to D)$$

such that for $\theta : (D \to D) \to D$ and $f : D \to D$ we have

$$\Psi(\theta)(f) = f(\theta(f)).$$

Prove further that $\mathrm{fix} : (D \to D) \to D$ is the *least* fixed point of Ψ.

3.110.2 AI: Human-English to AI-Lean

Exercise_4_9.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_9.lean

3.111 Exercise 4.10

3.111.1 Human-English

EXERCISE 4.10. Given a domain D and an element $a \in |D|$, construct a domain D_a where

$$|D_a| = \{x \in |D| \mid x \sqsubseteq a\}.$$

Show that if $f : D \to D$ is approximable, then f can be restricted to an approximable map $f' : D_{\mathrm{fix}(f)} \to D_{\mathrm{fix}(f)}$ where $f'(x) = f(x)$ for all $x \in |D_{\mathrm{fix}(f)}|$. How many fixed points does f' have in $|D_{\mathrm{fix}(f)}|$?

3.111.2 AI: Human-English to AI-Lean

Exercise_4_10.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_10.lean

3.112 Exercise 4.11

3.112.1 Human-English

EXERCISE 4.11. (Suggested by G. Plotkin). We can regard fix as assigning a fixed-point operator to each domain D. Show that fix is uniquely determined by the following general conditions on an assignment $D \rightsquigarrow F_D$:

(i) $F_D : (D \to D) \to D$;

(ii) $F_D(f) = f(F_D(f))$ for all $f : D \to D$;

(iii) whenever $f_0 : D_0 \to D_0$ and $f_1 : D_1 \to D_1$ are given and $h : D_0 \to D_1$ is such that $h(\bot) = \bot$ and $h \circ f_0 = f_1 \circ h$, then $h(F_{D_0}(f_0)) = F_{D_1}(f_1)$.

(Hint: Apply 4.7 to prove fix satisfies (iii). In the other direction use 4.10.)

3.112.2 AI: Human-English to AI-Lean

Exercise_4_11.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_11.lean

3.113 Exercise 4.12

3.113.1 Human-English

EXERCISE 4.12. Need an approximable $f : D \to D$ have a maximum fixed point? Give an example where there are many fixed points.

3.113.2 AI: Human-English to AI-Lean

Exercise_4_12.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_12.lean

3.114 Exercise 4.13

3.114.1 Human-English

EXERCISE 4.13. The proof of 4.1 uses the integers, whereas the proof of 4.6 uses 4.1. There is a hint of circularity here! It can be eliminated by the following steps:

(1) If a domain D has an element a where, for $f : D \to D$, the relation $f(a) \sqsubseteq a$ holds, then the least fixed point can be defined by

$$\mathrm{fix}(f) = \bigcap\{x \in |D| \mid f(x) \sqsubseteq x\}.$$

Note that $\mathrm{fix}(f) \sqsubseteq a$. (Hint: Remark that by 1.17 the formula gives a well-defined element. Call the element b. Prove that $f(b) \sqsubseteq b$ by showing that $f(b) \sqsubseteq x$ whenever $f(x) \sqsubseteq x$. Then note that $f(f(b)) \sqsubseteq f(b)$ so that $b \sqsubseteq f(b)$ also. Conclude $b = \mathrm{fix}(f)$ as least fixed point.)

(2) Remark that this proof uses only the monotonicity property of $f : |D| \to |D|$. Remark, too, that (1) can always be applied to power-set domains PA for any set A.

(3) Review the proof of 4.6 and establish by a fixed-point method that for any structured set $\langle Z, z, \cdot\rangle$ there is a unique function $s : \mathbf{N} \to Z$ such that

(i) $s(0) = z$;

(ii) $s(n^+) = s(n)^{\cdot}$, for $n \in \mathbf{N}$.

(4) Employ (3) for the proof of 4.1 by identifying $\langle \mathbf{N}, 0, {}^+\rangle$.

3.114.2 AI: Human-English to AI-Lean

Exercise_4_13.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_13.lean

3.115 Exercise 4.14

3.115.1 Human-English

EXERCISE 4.14. Need a monotone function $f : PA \to PA$ always have a *maximum* fixed point?

3.115.2 AI: Human-English to AI-Lean

Exercise_4_14.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_14.lean

3.116 Exercise 4.15

3.116.1 Human-English

EXERCISE 4.15. (For set theorists.) Let $f : |D| \to |D|$ be a monotone function on (the elements of) a domain. Show that f has a *maximal* fixed point (i.e. a fixed point that cannot be extended to a larger fixed point). (Hint: By Zorn's Lemma consider a maximal chain

$$C \subseteq \{x \in |D| \mid x \sqsubseteq f(x)\},$$

and use 2.11 to remark that $\bigsqcup C \in |D|$.) Now argue that f has a least fixed point.

3.116.2 AI: Human-English to AI-Lean

Exercise_4_15.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_15.lean

3.117 Exercise 4.16

3.117.1 Human-English

EXERCISE 4.16. (For fixed-point nuts). Show that a monotone function as in 4.15 has an "optimal" fixed point in the sense that it is the greatest fixed point below all the maximal fixed points and at the same time it is the largest fixed point consistent with all other fixed points. *Consistency* for sets of elements means having a common upper bound. (Hint: Follow these steps:

(1) Show that any non-empty set S of fixed points has a largest fixed point below by using the formula

$$f(\bigcap S) \sqsubseteq \bigcap S$$

and finding the least fixed point over $\bigcap S$.

(2) Letting a be the fixed point of (1) constructed from the set of maximal fixed points, remark that a is consistent with any other fixed point $x = f(x)$, since x can be extended to a maximal one. Suppose b is consistent with all fixed points, then $b \sqsubseteq y$ if y is maximal. (Why?).)

3.117.2 AI: Human-English to AI-Lean

Exercise_4_16.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_16.lean

3.118 Exercise 4.17

3.118.1 Human-English

EXERCISE 4.17. (For algebraists). Suppose $\langle S, 1, \cdot \rangle$ is a semi-group with unit (sometimes called a monoid). Remark that PS is a domain. For $a, b \in S$, what is the least $x \in PS$ such that

$$x = \{1\} \cup \{a, b\} \cup x \cdot x,$$

where in general for $x, y \subseteq S$

$$x \cdot y = \{t \cdot u \mid t \in x \text{ and } u \in y\}?$$

Need the fixed point be unique?

3.118.2 AI: Human-English to AI-Lean

Exercise_4_17.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_17.lean

3.119 Exercise 4.18

3.119.1 Human-English

EXERCISE 4.18. In Example 4.3 there are many unproved assertions about N and F. These should be checked. In particular, the isomorphism theorem of 4.6 could be proved by constructing a simple domain M from $\mathbf{M}$ in the way N is constructed from $\mathbf{N}$.

3.119.2 AI: Human-English to AI-Lean

Exercise_4_18.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_18.lean

3.120 Exercise 4.19

3.120.1 Human-English

EXERCISE 4.19. There are many unproved assertions in Example 4.4! In particular discuss "Peano's Axioms" for $\{0,1\}^*$. Show, moreover, that $\mathrm{one} : C \to T$ can be defined from the rest of the structure by a fixed-point equation.

3.120.2 AI: Human-English to AI-Lean

Exercise_4_19.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_19.lean

3.121 Exercise 4.20

3.121.1 Human-English

EXERCISE 4.20. For approximable $f, g : D \to D$ prove that

$$\mathrm{fix}(f \circ g) = f(\mathrm{fix}(g \circ f)).$$

3.121.2 AI: Human-English to AI-Lean

Exercise_4_20.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_20.lean

3.122 Exercise 4.21

3.122.1 Human-English

EXERCISE 4.21. Show that the less-than-or-equal-to relation $\ell \subseteq \mathbf{N} \times \mathbf{N}$ is uniquely determined by the fixed point equation

$$\ell = \{(n,n) \mid n \in \mathbf{N}\} \cup \{(n, m^+) \mid (n,m) \in \ell\}.$$

Consider the structured set $\langle P\mathbf{N}, \mathbf{N}, {}^+\rangle$ where, as before, $x^+ = \{n^+ \mid n \in x\}$.

What is the unique function $[\cdot] : \mathbf{N} \to P\mathbf{N}$ given by 4.13(3)? Prove that the structures $\langle \mathbf{N}, 0, {}^+\rangle$ and $\langle [m], m, {}^+\rangle$ are uniquely isomorphic for each $m \in \mathbf{N}$, and connect the isomorphism with ordinary addition of integers. Can the same be done for multiplication? (Hint: Consider the fixed-point equation

$$n \cdot \mathbf{N} = \{0\} \cup \{n + m \mid m \in n \cdot \mathbf{N}\},$$

where $n \in \mathbf{N}$ is fixed.)

3.122.2 AI: Human-English to AI-Lean

Exercise_4_21.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_21.lean

3.123 Exercise 4.22

3.123.1 Human-English

EXERCISE 4.22. Suppose $\mathbf{N}^*$ is a structured set satisfying only axioms (i) and (ii) of 4.5. Must there be a subset $\mathbf{N} \subseteq \mathbf{N}^*$ that satisfies (i), (ii), and (iii)? (Hint: Use a least fixed point in $P\mathbf{N}^*$.) (For set theorists): How do we know from the axioms of set theory that there exists such a set $\mathbf{N}^*$?

3.123.2 AI: Human-English to AI-Lean

Exercise_4_22.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_22.lean

3.124 Exercise 4.23

3.124.1 Human-English

EXERCISE 4.23. (Suggested by S. Eilenberg). Suppose $f : \mathcal{D} \to \mathcal{D}$ is approximable on a given domain $\mathcal{D}$. Suppose $a_n : \mathcal{D} \to \mathcal{D}$ is a sequence of approximable maps where

(i) $a_0(x) = \bot$, for all $x \in |\mathcal{D}|$;

(ii) $a_n \sqsubseteq a_{n+1}$ in $\mathcal{D} \to \mathcal{D}$, for all $n \in \mathbf{N}$;

(iii) $\bigsqcup_{n=0}^{\infty} a_n = I_{\mathcal{D}}$ in $\mathcal{D} \to \mathcal{D}$;

(iv) $a_{n+1} \circ f = a_{n+1} \circ f \circ a_n$, for all $n \in \mathbf{N}$.

Prove that f has a unique fixed point. (Hint: Show that if $x = f(x)$, then $a_n(x) \sqsubseteq a_n(\text{fix}(f))$ for all $n \in \mathbf{N}$ by induction on n.)

3.124.2 AI: Human-English to AI-Lean

Exercise_4_23.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_23.lean

3.125 Exercise 4.24

3.125.1 Human-English

EXERCISE 4.24. (For set theorists). Let $f : A \to B$ and $g : B \to A$ be one-one functions (into, not necessarily onto!) Prove the Schroeder - Bernstein theorem to the effect that there exists a one-one correspondence $h : A \leftrightarrow B$. (Hint: (Suggested by A. Tarski). By the fixed-point theorem find $X \subseteq A$ where

$$X = (A - g(B)) \cup g(f(X)),$$

where $f(X) =$ the image of the set X under the function f. Define $h \subseteq A \times B$ as a union of two restrictions:

$$h = f \restriction X \cup g^{-1} \restriction (A - X).$$

A picture helps.)

3.125.2 AI: Human-English to AI-Lean

Exercise_4_24.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_24.lean

3.126 Exercise 4.25

3.126.1 Human-English

EXERCISE 4.25. Perhaps the domains $\mathbf{N}$ and C are not exactly analogous? C was based on $\{0, 1\}$ as the underlying set of tokens. Construct a system C_1 based on $\{1\}^*$ (= finite strings of 1's) with neighbourhoods:

$$C_1 = \{\, \{1^m \mid m > n\} \mid n \in \mathbf{N} \,\} \cup \{\, \{1^n\} \mid n \in \mathbf{N} \,\}.$$

What structure should be put on C_1 strictly analogous to that on $C (= C_2)$? What kinds of approximable maps relate $\mathbf{N}$, C_1, and C_2? Draw some pictures.

3.126.2 AI: Human-English to AI-Lean

Exercise_4_25.lean

Lean source: DomainTheory/NeighbourhoodSystems/FixedPointsAndRecursion/Exercise_4_25.lean

3.127 Typed λ-calculus

Dependency diagram. Each box is one item. The arrowhead is on the item that imports. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it is not shown. Blue is a definition, green a proposition, amber a table, red a theorem, and indigo an exercise.

3.128 Introduction

3.128.1 Human-English

3.129 LECTURE V

TYPED λ - CALCULUS

In Examples 4.3 and 4.4, after suitable domains have been constructed, functions are characterized by recursion equations whose form of expression is — basically — a composition or substitution of known functions together with the function to be defined. This method can be made more precise and more easily usable by expanding our notation for functions — particularly by inventing a "temporary" notation for a function as a thing in itself without having to have special letters for functions. The device is called λ-*abstraction*. It is related to ordinary set abstraction (the $\{x \mid \ldots\}$ — notation already much used in these lectures), but we gear the approach to domains and their elements, and especially to function spaces.

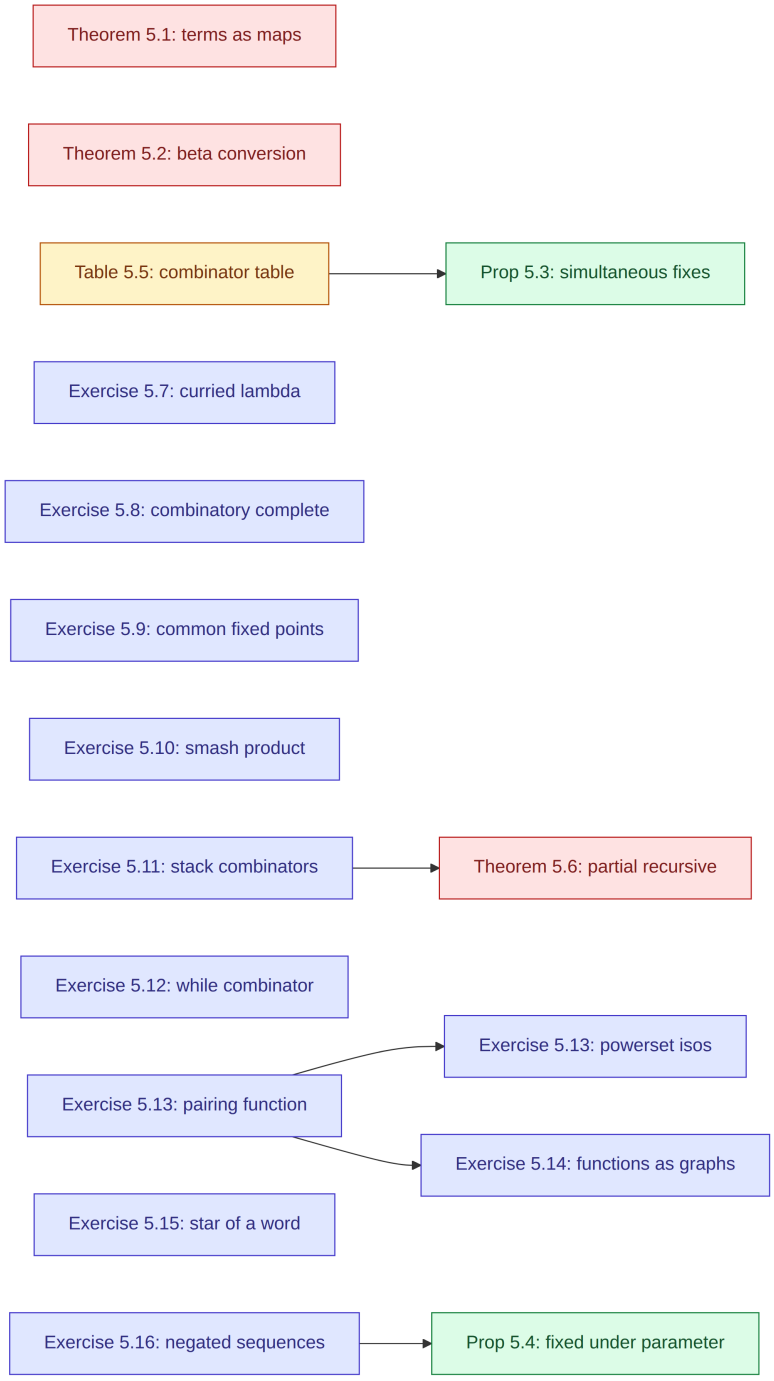


Figure 20: Typed λ-calculus.

At this stage it would not be so helpful to produce a rigorously formal definition of the syntax of the typed λ-calculus; we shall try to suggest what is needed by example. There are so many examples at hand, the less formal discussion ought to be sufficient.

In the first place we should set aside, in the notational store room as it were, a stock of variables

$$x, y, z, w, \ldots$$

These variables will be required in different "sizes" or "types". Roughly speaking there should be an infinite number of variables to range over the elements of each domain $\mathcal{D}$. We could perhaps write

$$x_0^{\mathcal{D}}, x_1^{\mathcal{D}}, x_2^{\mathcal{D}}, \ldots,$$

but the subscripts to insure an infinity of variables and the superscripts to record the typing of the variables lead to a notation as

tiresome to write as it is to read. We simply agree that we can have as many variables as we need and that they come in all the types.

Strictly speaking we should also introduce *type symbols* and not confuse types with domains. But if the reader will simply keep in mind that *form* in language has always to be kept distinct from *content*, the confusion at the type level will not matter so very much. A point at which the confusion might cause a real confusion concerns *compound types*. Given $\mathcal{D}_0$ and $\mathcal{D}_1$ we can form such compounds as

$$\mathcal{D}_0 + \mathcal{D}_1, \quad \mathcal{D}_0 \times \mathcal{D}_1, \quad \mathcal{D}_0 \to \mathcal{D}_1$$

What has to be remembered is that a compound domain (neighbourhood system), $\mathcal{D}_0 \times \mathcal{D}_1$ say, does not uniquely determine the "parts" $\mathcal{D}_0$ and $\mathcal{D}_1$. (We could make it do so, but it would cost some effort.) Of course, the symbol "$\mathcal{D}_0 \times \mathcal{D}_1$" has well defined parts. The point is that *different* ways of forming a compound domain could lead to the *same* result, meaning that a domain does not let us retrace its exact history of construction. Compound symbols, however, always carry their histories around with them, since otherwise they would not be readable. What we want, of course, are *both* domain symbols *and* domains, the latter being the *meanings* of the former. Most of the time we can happily pretend that it is only the domains themselves we have to think about.

Besides variables, we will also need certain *constants*. For instance, the symbol 0 (perhaps, better $0^{\mathbf{N}}$) denotes a certain element of $|\mathbf{N}|$. Similarly, in view of Theorem 4.2, for each domain $\mathcal{D}$ there is a well-determined element $\mathrm{fix}^{\mathcal{D}}$ of the compound type $((\mathcal{D} \to \mathcal{D}) \to \mathcal{D})$ denoting the least fixed-point operator. We have considered any number of similar constants of a great variety of types already (cf. 4.3 and 4.4; cond is an especially good one). We can say that the variables and constants are *atomic terms*, where "atomic" here means non-compound.

To form compound terms, there are several means: for example, if $\tau, \ldots, \sigma$ is a list of already obtained terms (including variables or constants), then we can form an ordered *tuple*

We have already done so in 3.1. If the types of $\tau, \ldots, \sigma$ are $D, \ldots, D'$, respectively, then the type of the tuple is the product domain

$$D \times \cdots \times D',$$

because we intend that the tuple denote an element of this domain. (The tuple notation for *functions* as in 3.3 is being forgotten for the time being.)

Next suppose that τ has type $(D_0 \to D_1)$ and σ has type D_0, then the usual *function-value* notation

$$\tau(\sigma)$$

is a compound term of type D_1. We also use

$$\tau(\sigma_0, \ldots, \sigma_{n-1})$$

as an abbreviation of

$$\tau(\langle \sigma_0, \ldots, \sigma_{n-1} \rangle),$$

where, if the types of $\sigma_0, \ldots, \sigma_{n-1}$ are $D_0, \ldots, D_{n-1}$, then the type of τ has to be of the form

$$((D_0 \times \cdots \times D_{n-1}) \to D_n)$$

where D_n is the type of the compound. In this manner, with functions applied to tuples, we have the full facility of substitution into functions of many variables just by iterating the notation.

Having taken into account *function value*, it remains to provide for *function definition*. Suppose that $x_0, \ldots, x_{n-1}$ is a list of distinct variables of types $D_0, \ldots, D_{n-1}$. Suppose further that τ is a term — no matter how complicated — of type D_n. Then we can regard τ as defining a function of n-variables of type

$$((D_0 \times \cdots \times D_{n-1}) \to D_n).$$

What we have not done is to reward our regard by, as yet, providing a quick-to-write "name" for that function. This we now do; it is called

$$\lambda x_0, \ldots, x_{n-1} \cdot \tau,$$

where we stress that the x_i must be *distinct* variables and that this
expression denotes the *whole function*. That is why we provide it with a special symbol.
Here is an example of the λ - notation

$$\lambda x, y.x,$$

which is read "lambda ex wye ... (pause) ... ex". If the types of x and y are D_0 and D_1, then the type of the above is

$$((D_0 \times D_1) \to D_0).$$

Indeed, we know this function very well: it is the *first projection function* p_0 of 3.3 and the equation

$$p_0 = \lambda x, y.x$$

is true, as is the equation

$$p_1 = \lambda x, y.y.$$

In the notation of 3.3, we also find the true equation

$$\langle f, g \rangle = \lambda w.\langle f(w), g(w) \rangle,$$

where on the right-hand side we are using "official" λ - notation for a function of type

$$(D_2 \to (D_0 \times D_1)).$$

The notation on the left is just an *abbreviation* and it should not be confused with the pair (2-tuple) of type

$$((D_2 \to D_0) \times (D_2 \to D_1)).$$

(Since the two domains just mentioned are *isomorphic*, the possible confusion is not all that serious. On the other hand, one confusion we will completely overlook is that between 1-tuples $\langle x \rangle$ and elements x. Strictly speaking they are different, but we shall not bother to make the distinction.)

Here are some other examples of true equations:

$$\mathrm{eval} = \lambda f, x.f(x) \qquad \text{(cf. 3.11)}$$

$$\mathrm{curry} = \lambda g \lambda x \lambda y.g(x, y) \qquad \text{(cf. 3.12)}$$

The first should be immediately clear; while the second is particularly *instructive*. What is being illustrated is that the λ - notation can

be *iterated*. The distinction being drawn is between

$$\lambda x_0, x_1, \ldots, x_{n-1}.\tau \quad \text{and} \quad \lambda x_0 \lambda x_1 \ldots \lambda x_{n-1}.\tau.$$

The first has type

$$((D_0 \times D_1 \times \cdots \times D_{n-1}) \to D_n);$$

while the second has type

$$(D_0 \to (D_1 \to (\ldots (D_{n-1} \to D_n) \ldots))).$$

This is related also to the true equation

$$\mathrm{curry}(\lambda x, y.\tau) = \lambda x \lambda y.\tau,$$

which shows that there are operators relating to the two notations. The first is the *multivariate* form; the second is the *curried* form.

Here is another true equation

$$\mathrm{fix} = \mathrm{fix}(\lambda F \lambda f.f(F(f))),$$

where the fix on the left has type $((D \to D) \to D)$ and that on the right type

$$((((D \to D) \to D) \to ((D \to D) \to D)) \to ((D \to D) \to D)).$$

This is the content of Exercise 4.9. (This also shows why type superscripts are tiresome.)

The combination

$$\mathrm{fix}(\lambda x.\tau)$$

occurs so often, that from time to time we abbreviate it as

$$!x.\tau,$$

but remember it only makes sense if x and τ have the *same* type. For example in 4.3 we could have written

$$\sigma = !f\lambda n.\mathrm{cond}(\mathrm{zero}(n), 0, f(\mathrm{pred}(n)) + \mathrm{pred}(n))$$

and read this as

"σ is the least (recursively defined) function f whose value at n is cond $(\dots)$."

We note that in the so-called "body" of the expression inside the

cond-part the variable f occurs again. That is just the point! This is a *recursive definition*; it is made into an *explicit* definition by invoking the least fixed-point operator.

In a λ-expression, $\lambda x, y, z.\tau$, say, the variables x, y, z are being *bound* in τ; but τ may have other variables that are nowhere bound in τ and these remain *free variables* of the whole expression. Bound variables are *dummy variables* and may be rewritten by other variables; thus

$$\lambda x.\tau = \lambda y.\tau[y/x]$$

is a true equation *PROVIDED* the variable y does not occur in τ. In the equation the notation $\tau[y/x]$ means the result of *substituting* (*rewriting*) the variable y for the variable x throughout the term τ. We can also write $\tau[\sigma/x]$ for substituting a whole term σ for a variable in the other term.

We have already spoken of "true equations", but how do we know that these curious equations are meaningful at all? They are, but this is something that has to be proved.

3.130 Theorem 5.1

3.130.1 Human-English

THEOREM 5.1. Every typed λ-term τ defines an approximable function of its free variables.

Proof: We argue by an induction on the complexity of τ; there will only be a few cases to consider since the "syntax" of λ-terms is limited — even though terms can be of any length.

If τ is a variable or a constant there is nothing to prove. We already know that

$$x \mapsto x \qquad \text{and} \qquad x \mapsto k$$

are approximable functions.

Suppose τ has the form

$$\langle \sigma_0, \dots, \sigma_{n-1} \rangle.$$

Then the σ_i are less complex terms, and so we can assume — as our induction hypothesis — that they define approximable functions of the free variables. Having said this, we just apply the already

proved 3.4 to conclude (after a suitable generalization to the multivariate case) that τ, which takes on tuples as values, also defines an approximable function.

Next, suppose τ has the form

$$\sigma_0(\sigma_1),$$

where we are sure that the types of all the terms match properly. Again we can assume the σ_i to be well behaved. But the values we seek can also be written as

$$\mathrm{eval}(\sigma_0, \sigma_1).$$

Since eval is approximable by 3.11, we just have to invoke an instance of 3.7 to gain the desired conclusion.

Finally, suppose that τ has the form

$$\lambda x.\sigma.$$

By a judicious choice of the order of the variables in σ (including x), we can assume that σ defines an approximable function

$$g : D_0 \times \cdots \times D_{n-1} \times D_n \to D'$$

where D' is the type of σ, D_n is the type of x, and $D_0, \ldots, D_{n-1}$ are the types of the remaining free variables of σ. We apply 3.12 and obtain an approximable function

$$\mathrm{curry}(g) : D_0 \times \cdots \times D_{n-1} \to (D_n \to D').$$

But, this is just exactly the function defined by τ.

We leave as an exercise the more general case of a term τ of the form

$$\lambda x_0, \ldots, x_{k-1}.\sigma,$$

which has a string of bound variables. □

We can now say more precisely what it means to call $\sigma = \tau$ a "true equation". This means that, if we employ the method of the proof of 5.1, the two terms define the *same function* of the free variables. For example,

$$\lambda x.\tau = \lambda y.\tau[y/x]$$

is true, provided y does not occur free in the term τ, since the systematic generation of the function defined by $\lambda x.\tau$ does not depend on what the variable x *looks like* but only on its *position* in the term τ. Some other obviously desirable rules for generating true equations are stated in the exercises. But one rule is so basic that we state it here in full generality.

3.130.2 AI: Human-English to AI-Lean

Theorem_5_1.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Theorem_5_1.lean

3.131 Theorem 5.2

3.131.1 Human-English

THEOREM 5.2. For suitably typed λ-terms the following equation is true:

$$(\lambda x_0, \ldots, x_{n-1} \cdot \tau)(\sigma_0, \ldots, \sigma_{n-1}) = \tau[\sigma_0/x_0, \ldots, \sigma_{n-1}/x_{n-1}].$$

Proof: It will be sufficient to carry out the proof for $n = 1$. The proof proceeds by induction on the complexity of the term τ.

In case τ is a *constant* k, the result reads

$$(\lambda x.k)(\sigma) = k,$$

and this is a true equation.

In case τ is a *variable* (in particular, the variable x), the result reads

$$(\lambda x.x)(\sigma) = \sigma,$$

and again this is a true equation.

In case τ is a *tuple* (say, $\langle \tau_0, \tau_1 \rangle$) the result reads

$$(\lambda x.\langle \tau_0, \tau_1 \rangle)(\sigma) = \langle \tau_0[\sigma/x], \tau_1[\sigma/x] \rangle.$$

This is true, because the left-hand side can be transformed by the true equation

$$(\lambda x.\langle \tau_0, \tau_1 \rangle)(\sigma) = \langle (\lambda x.\tau_0)(\sigma), (\lambda x.\tau_1)(\sigma) \rangle;$$

and then we apply the inductive assumption for τ_0 and for τ_1.

In case τ is an *application*, we want (supposing the term is $\tau_0(\tau_1)$),

$$(\lambda x.\tau_0(\tau_1))(\sigma) = \tau_0[\sigma/x](\tau_1[\sigma/x]).$$

We can proceed as in the last case, noting that the left-hand side equals

$$\text{eval } ((\lambda x.\langle \tau_0, \tau_1 \rangle)\ (\sigma))\ .$$

In case τ is an *abstract* (say, $\lambda y.\tau_0$), we want

$$(\lambda x.\lambda y.\tau_0)\ (\sigma) = \lambda y.\tau_0[\sigma/x]$$

PROVIDED the variable y is not free in σ. For this we require the true equation

$$(\lambda x.\lambda y.\tau)\ (\sigma) = \lambda y.(\lambda x.\tau)\ (\sigma)\ .$$

We argue for this by letting g be the function of $n + 2$ free variables defined by τ. Then, by 5.1, the λ-term $\lambda x.\lambda y.\tau$ defines the function $\text{curry } (\text{curry } (g))$ of n arguments. We can call this function h for the moment. We can write

$$h(v)\ (\sigma)\ (y) = g(v, \sigma, y)\ ,$$

where v is a list of arguments. But, with an appropriate combinator inv, which applied to g inverts the order of the last two arguments, we can write

$$h(v)\ (\sigma)\ (y) = \mathrm{curry}\ (\mathrm{inv}\ (g))\ (v, y)\ (\sigma)\ .$$

But, $\mathrm{curry}\ (\mathrm{inv}\ (g))$ is just the function defined by $(\lambda x.\tau)$. So what we have proved as true is

$$(\lambda x.\lambda y.\tau)\ (\sigma)\ (y) = (\lambda x.\tau)\ (\sigma)\ .$$

But if y is not free in α and

$$\alpha(y) = \beta$$

is true, then so is

$$\alpha = \lambda y.\beta\ .$$

This completes the proof. □

We note that if τ' is the term $\lambda x, y.\tau$, then $\tau'(x, y)$ means the same as τ. This gives a convenient way of indicating free variables: we just write $\sigma(x, y)$ — where x, y are not free in σ — and this will have the same values as any term τ which does involve the extra free variables x and y. We use this notational device in the next theorem.

3.131.2 AI: Human-English to AI-Lean

Theorem_5_2.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Theorem_5_2.lean

3.132 Proposition 5.3

3.132.1 Human-English

PROPOSITION 5.3. The least fixed point of $\lambda x, y.\ \langle \tau(x, y), \sigma(x, y)\rangle$ is the pair with coordinates

$!x.\ \tau(x,\ !y.\ \sigma(x, y))$ and

$!y.\ \sigma(!x.\ \tau(x, y), y)$.

Proof: (We are assuming that x and y are not free in τ and σ.) The purpose of the fixed-point search is to find the least solution of the pair of equations $x = \tau(x, y)$ and $y = \sigma(x, y)$. In other words, we are generalizing the fixed-point equation from one to two variables—and, of course, we could go much further to any number of variables. To this end, let

$y_* = !y.\ \sigma(!x.\ \tau(x, y), y)$, and

$x_* = !x.\ \tau(x, y_*)$.

Then

$x_* = \tau(x_*, y_*)$,

and

$y_* = \sigma(!x.\ \tau(x, y_*), y_*)$

$= \sigma(x_*, y_*)$.

This proves that $\langle x_*, y_*\rangle$ is one fixed-point pair.

Suppose, then, that $\langle x_0, y_0 \rangle$ is the least solution. (Why does a least solution have to exist? Hint: Consider a suitable mapping of type $D_0 \times D_1 \to D_0 \times D_1$, where D_0 is the type of x and D_1 the type of y.) Then we know $x_0 = \tau(x_0, y_0)$ and $y_0 = \sigma(x_0, y_0)$, and also $x_0 \sqsubseteq x_*$ and $y_0 \sqsubseteq y_*$. But from

$\tau(x_0, y_0) \sqsubseteq x_0$,

it follows that

$!x.\ \tau(x, y_0) \sqsubseteq x_0$.

Consequently,

$$\sigma(!x.\tau(x, y_0), y_0) \sqsubseteq \sigma(x_0, y_0) \sqsubseteq y_0.$$

By the fixed-point definition of y_*, we have $y_* \sqsubseteq y_0$, so $y_* = y_0$; whence,

$$x_* = !x.\tau(x, y_*) = !x.\tau(x, y_0) \sqsubseteq x_0.$$

So also $x_* = x_0$. □ We have the right formula for y_0, and a similar argument gives x_0.

The purpose of giving the above proof was to illustrate the use of the least fixed-point operator in proofs. We have such true principles as:

$$!x.\tau(x) = \tau(!x.\tau(x));$$

and

$$\tau(y) \sqsubseteq y \text{ implies } !x.\tau(x) \sqsubseteq y,$$

provided, of course, that x is not free in τ. These, together with the monotonicity of all the functions, were just the methods used in the above proof. Here is another example.

3.132.2 AI: Human-English to AI-Lean

Proposition_5_3.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Proposition_5_3.lean

3.133 Proposition 5.4

3.133.1 Human-English

PROPOSITION 5.4. Let x, y, and $\tau(x, y)$ be of the same type D and let g be of type $(D \to D)$, then the equation

$$\lambda x.!y.\tau(x, y) = !g.\lambda x.\tau(x, g(x))$$

is true.

Proof : Let f be the function on the left-hand side. We can write

$$f(x) = !y.\tau(x, y) = \tau(x, f(x)).$$

Therefore

$$f = \lambda x.\tau(x, f(x)),$$

and it follows that

$$g_0 = !g.\lambda x.\tau(x, g(x)) \sqsubseteq f.$$

Then we have at once, by definition of g_0,

$$g_0(x) = \tau(x, g_0(x)),$$

for any given x. But by definition of f we find

$$f(x) = !y.\tau(x, y) \sqsubseteq g_0(x).$$

As this holds for all x, then $f \sqsubseteq g_0$ follows. So the equation is true. □

The last proof is instructive as it uses equations and inclusions between functions. In particular we have just made use of the principle:

> if $\tau \sqsubseteq \sigma$ holds for all values of x,
> then $\lambda x.\tau \sqsubseteq \lambda x.\sigma$ holds.

This is another form of Theorem 3.13(i).

3.133.2 AI: Human-English to AI-Lean

Proposition_5_4.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Proposition_5_4.lean

3.134 Table 5.5

3.134.1 Human-English

TABLE 5.5. In the displayed table we give a summary of uses of the λ-notation to define various combinators. We have mentioned some of these equations before, and there are some combinators here we have not mentioned before — their meanings, however, should be clear.

$$\begin{aligned}
P_0 &= \lambda x, y.x \\
P_1 &= \lambda x, y.y \\
\text{pair} &= \lambda x \lambda y.\langle x, y\rangle \\
\text{n-tuple} &= \lambda x_0 \lambda x_1 \ldots \lambda x_{n-1}.\langle x_0, x_1, \ldots, x_{n-1}\rangle \\
\text{diag} &= \lambda x.\langle x, x\rangle \\
\text{funpair} &= \lambda f \lambda g \lambda x.\langle f(x), g(x)\rangle \\
\text{proj}_i^n &= \lambda x_0, x_1, \ldots, x_{n-1}.x_i \\
\text{inv}_{i,j}^n &= \lambda x_0, \ldots, x_i, \ldots, x_j, \ldots, x_{n-1}.\langle x_0, \ldots, x_j, \ldots, x_i, \ldots, x_{n-1}\rangle
\end{aligned}$$

$$\begin{aligned}\text{eval} &= \lambda f, x.f(x)\\ \text{curry} &= \lambda g \lambda x \lambda y.g(x,y)\\ \text{comp} &= \lambda g, f \lambda x.g(f(x))\\ \text{const} &= \lambda k \lambda x.k\\ \text{fix} &= \lambda f! x.f(x)\end{aligned}$$

A TABLE OF COMBINATORS

It is important to note that since we have not typed the variables, these equations are ambiguous: they only become precise when the types are specified. It follows, therefore, that what we find in the table are *schemes* for combinators; there are actually infinitely many distinct combinators corresponding to any one equation depending on how the variables have types chosen for them. Clearly it is better to imagine this variety of combinators than it is to try to notate them with type superscripts.

One interest of combinators is that it is often possible to write expressions without variables — if enough combinators are used. This is sometimes useful, but it can become clumsy. On the other hand, if the same combination occurs over and over, it is sometimes useful to give it a name. This is what we do with, say, *composition* where

$$\text{comp}\ (g, f) = g \circ f.$$

On the one side we have the prefix notation, and on the other, the more common infix notation. With either notation the variable seen in $\lambda x.\ g(f(x))$ has been got rid of. The choice between equivalent notations ought to be based on a desire for readability. □

The reader will have noted that there are some combinators not appearing in Table 5.5. The reason is that combinators like cond, succ, pred, zero, 0 cannot be defined in the pure λ-notation but are specific to domains like T and $\mathbf{N}$; we, thus, have to regard them as primitive. But once they are in hand, a very large number of other functions can be defined from these combined with λ-expressions. The next theorem gives an indication of the possibilities.

3.134.2 AI: Human-English to AI-Lean

Table_5_5.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Table_5_5.lean

3.135 Theorem 5.6

3.135.1 Human-English

THEOREM 5.6. For every partial recursive function $h : \mathbf{N} \to \mathbf{N}$, there is a λ-term τ of type $(\mathbf{N} \to \mathbf{N})$ such that the only constants occurring in τ are

$$\text{cond},\ \text{succ},\ \text{pred},\ \text{zero},\ 0$$

and where if $h(n) = m$, then

$$\tau(n) = m$$

is true; and if $h(n)$ is undefined, then

$$\tau(n) = \perp$$

is true. The equation $\tau(\perp) = \perp$ is also true.

Proof : We have only formulated the theorem for functions of one variable — but to give the proof, it is convenient to pass through functions of any number of (integer) variables. We shall also have to recall the precise definition of the notion of partial recursive function.

It is also convenient to work with (*very*)*strict* functions

$$f : \mathbf{N}^k \to \mathbf{N}.$$

These are functions such that if $n_0, \ldots, n_{k-1} \in \mathbf{N}$ and $n_i = \perp$ for at least one $i < k$, then

$$f(n_0, \ldots, n_{k-1}) = \perp.$$

It is easy to check that compositions of strict functions are strict. It is also easy to see that any *partial* function

$$g : \mathbf{N}^k \to \mathbf{N}$$

extends to a strict (*approximable*) function

$$\bar{g} : \mathbf{N}^k \to \mathbf{N},$$

which takes the same values as g as long as g is defined; otherwise $\bar{g}$ takes the value $\perp$. What we want to show for *partial recursive* g is that the corresponding $\bar{g}$ is defined by a λ - expression.

In the first place we have to check that *primitive recursive* functions have λ - definitions in this sense. We recall that *primitive recursive* functions are generated from certain elementary *starting* functions by multi-variate composition and the scheme of primitive recrusion. The *starting* functions are the constant function with value zero and the "identity" or "projection" functions. For example, $g(n_0, n_1, n_2) = n_1$ for all $n_0, n_1, n_2 \in \mathbf{N}$ is one of the *starting* functions. Now we cannot just use the λ-term

$$\lambda x_0, x_1, x_2.x_1$$

to represent $\bar{g}$, because the function so defined is not strict. But any function in $\mathbf{N}^k \to \mathbf{N}$ can be cut down to a strict function by a simple device. Consider

$$\lambda x.\ \mathrm{cond}(\mathrm{zero}(x), x, x)$$

with x of type $\mathbf{N}$. This is the strict version of the identity function of one argument. The strict projection function of two arguments can be defined by

$$\lambda x_0, x_1.\ \mathrm{cond}(\mathrm{zero}(x_1), x_0, x_0).$$

The one of three arguments by:

$$\lambda x_0, x_1, x_2.\ \mathrm{cond}(\mathrm{zero}(x_0), \mathrm{cond}(\mathrm{zero}(x_2), x_1, x_1), \mathrm{cond}(\mathrm{zero}(x_2), x_1, x_1)).$$

This is not done very elegantly, and the reader can find for himself a general solution based on perhaps a better notation for the required compositions of functions.

As we remarked, strict functions are closed under substitution, and any substitution of a batch of functions into another function can be given by a λ-term, if the various functions can themselves be so defined. It only remains to λ-define functions obtained by primitive recursion. Thus, suppose, for the sake of argument, that

$$\bar{f} : \mathbf{N} \to \mathbf{N} \qquad \text{and} \qquad \bar{g} : \mathbf{N}^3 \to \mathbf{N}$$

are given as total functions with $\bar{f}$ and $\bar{g}$ being λ-definable. From them, we obtain by primitive recursion $\bar{h} : \mathbf{N}^2 \to \mathbf{N}$ where

$$\bar{h}(0, m) = \bar{f}(m),$$

$$\bar{h}(n+1, m) = \bar{g}(n, m, \bar{h}(n, m))$$

for all $n, m \in \mathbf{N}$. The λ-term defining $\bar{h}$ is

$$!k\ \lambda x, y.\ \mathrm{cond}(\mathrm{zero}(x), \bar{f}(y), \bar{g}(\mathrm{pred}(x), y, k(\mathrm{pred}(x), y))).$$

Here we have had to use the fixed-point operator on a variable k of type $(\mathbf{N}^2 \to \mathbf{N})$. The variables x, y are of type $\mathbf{N}$ and the cond-construction puts the two traditional equations into two clauses of one expression. It is easy to see that the fixed-point function *is* strict and is nothing more than $\bar{h}$.

That completes the representation of *primitive recursive* functions. To obtain the *partial recursive* functions, the idea is to use the so-called μ-scheme (least number operator) and, further, to close up under substitution. We need only treat the μ-scheme. Suppose, by way of example, $f(n, m)$ is given as a

primitive recursive function. We then define h (generally, a partial function) by

$$h(m) = \text{the least } n \text{ where } f(n, m) = 0.$$

This is often written

$$h(m) = \mu n.\ f(n, m) = 0.$$

Supposing, as we may, $\bar{f}$ is λ-definable, we introduce first

$$\bar{g} = !g\ \lambda x, y.\ \mathrm{cond}(\mathrm{zero}(\bar{f}(x, y)), x, g(\mathrm{succ}(x), y)).$$

Then $\bar{h} = \lambda y.\ \bar{g}(0, y)$. This is easily seen to be strict. Also easy to see is that if $h(m)$ is defined, then $\bar{g}(0, m) = h(m)$. But, if $h(m)$ is not defined, it takes some argument to make sure that the least fixed-point construction forces $\bar{g}(0, m) = \bot$. However, the argument is not very difficult. $\square$

What is *not* said in 5.6 is that every λ-term defines a partial recursive function. This is true (with suitable control over the constants and types in the expression), but the proof requires a full analysis of computability properties of domain constructions. This is the topic of Lecture VII.

It should be remarked that the types of variables needed for the proof of 5.6 never get very high. In fact, types like N, N^k, and $(N^k \to N)$ were the only ones needed (with perhaps T thrown in also).

Recursion on N was the topic of 5.6; further examples of recursion on other domains are included in the exercises.

3.135.2 AI: Human-English to AI-Lean

Theorem_5_6.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Theorem_5_6.lean

3.136 Exercise 5.7

3.136.1 Human-English

EXERCISE 5.7. Find definitions of

$$\lambda x, y.\, \tau \quad \text{and} \quad \sigma(x, y)$$

which use only λv with one variable and applications only to one argument at a time. Note that use must be made of the combinators p_0, p_1, pair. Generalize the result to functions of many variables.

3.136.2 AI: Human-English to AI-Lean

Exercise_5_7.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Exercise_5_7.lean

3.137 Exercise 5.8

3.137.1 Human-English

EXERCISE 5.8. (For combinator nuts.) Table 5.5 was meant to show how combinators could be defined in terms of λ-expressions. Can the tables be turned to show that with enough combinators available, every λ-expression can be defined by combining combinators, using $\sigma(\tau)$ as the *only* mode of combination?

3.137.2 AI: Human-English to AI-Lean

Exercise_5_8.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Exercise_5_8.lean

3.138 Exercise 5.9

3.138.1 Human-English

EXERCISE 5.9. Suppose that $f, g : \mathcal{D} \to \mathcal{D}$ are approximable and $f \circ g = g \circ f$. Show that f and g have a *least common fixed point* $x = f(x) = g(x)$. (Hint: Refer back to Exercise 4.20.) If in addition $f(\bot) = g(\bot)$, show that $\mathrm{fix}(f) = \mathrm{fix}(g)$. In particular, will $\mathrm{fix}(f) = \mathrm{fix}(f^2)$? What if we only assume $f \circ g = g^2 \circ f$?

3.138.2 AI: Human-English to AI-Lean

Exercise_5_9.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Exercise_5_9.lean

3.139 Exercise 5.10

3.139.1 Human-English

EXERCISE 5.10. Suppose $\mathcal{D}_0$ and $\mathcal{D}_1$ are neighbourhood systems over disjoint sets Δ_0 and Δ_1. Define the *smash product* $\mathcal{D}_0 \otimes \mathcal{D}_1$ with neighbourhoods

$$\{\Delta_0 \cup \Delta_1\} \cup \{X \cup Y \mid X \in \mathcal{D}_0 \setminus \{\Delta_0\} \text{ and } Y \in \mathcal{D}_1 \setminus \{\Delta_1\}\}.$$

Show that this *is* a neighbourhood system. Define $(\mathcal{D}_0 \to_\perp \mathcal{D}_1)$ so that $|\mathcal{D}_0 \to_\perp \mathcal{D}_1|$ consists exactly of the *strict functions*. By introducing appropriate combinators, show that

$$(\mathcal{D}_0 \to_\perp (\mathcal{D}_1 \to_\perp \mathcal{D}_2)) \quad \text{and} \quad ((\mathcal{D}_0 \otimes \mathcal{D}_1) \to_\perp \mathcal{D}_2)$$

are isomorphic.

3.139.2 AI: Human-English to AI-Lean

Exercise_5_10.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Exercise_5_10.lean

3.140 Exercise 5.11

3.140.1 Human-English

EXERCISE 5.11. For any domain $\mathcal{D}$ we may regard $\mathcal{D}^\infty$ as consisting of (bottomless) *stacks* of elements of $\mathcal{D}$. With this image in mind, define appropriate combinators with the obvious meanings:

$$\text{head} : \mathcal{D}^\infty \to \mathcal{D}; \quad \text{tail} : \mathcal{D}^\infty \to \mathcal{D}^\infty; \quad \text{push} : \mathcal{D} \times \mathcal{D}^\infty \to \mathcal{D}^\infty.$$

Using the fixed-point theorem argue that there is a combinator

$$\text{diag} : \mathcal{D} \to \mathcal{D}^\infty$$

where for all $x \in |\mathcal{D}|$ we have

$$\text{diag}(x) = \langle x \rangle_{n=0}^{\infty}.$$

(Hint: Try a recursive definition, say

$$\text{diag}(x) = \text{push}(x, \text{diag}(x)),$$

but be sure to prove *all* terms of $\text{diag}(x)$ equal x.) Also introduce by an appropriate recursion a combinator

$$\text{map} : (D \to D)^\infty \times D \to D^\infty$$

where for elements of the suitable types:

$$\text{map}(\langle f_n \rangle_{n=0}^\infty, x) = \langle f_n(x) \rangle_{n=0}^\infty.$$

3.140.2 AI: Human-English to AI-Lean

Exercise_5_11.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Exercise_5_11.lean

3.141 Exercise 5.12

3.141.1 Human-English

EXERCISE 5.12. On any domain D introduce (as a least fixed point) a combinator

$$\text{while} : (D \to T) \times (D \to D) \to (D \to D)$$

by the recursion

$$\text{while}(p, f)(x) = \text{cond}(p(x), \text{while}(p, f)(f(x)), x).$$

Prove that

$$\text{while}(p, \text{while}(p, f)) = \text{while}(p, f).$$

Show how while could have been used to obtain the least number operator mentioned in the proof of 5.6. Generalize the idea to define a combinator

$$\text{find} : D^\infty \times (D \to T) \to D$$

with the meaning "find the first term of the sequence (if any) which satisfies the given precicate."

3.141.2 AI: Human-English to AI-Lean

Exercise_5_12.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Exercise_5_12.lean

3.142 Exercise 5.13

3.142.1 Human-English

EXERCISE 5.13. Prove the existence of a one-one function $\text{num} : \mathbf{N} \times \mathbf{N} \to \mathbf{N}$ such that

$$\text{num}(0, 0) = 0;$$

$$\mathrm{num}(n, m+1) = \mathrm{num}(n+1, m) + 1;$$

$$\mathrm{num}(n+1, 0) = \mathrm{num}(0, n) + 1.$$

Draw a picture (i.e. an infinite matrix) for the function and find a closed form for its values, if possible. Use the function to prove the isomorphism of the domains

$$P\mathbf{N},\ P(\mathbf{N} \times \mathbf{N}),\ P\mathbf{N} \times P\mathbf{N}.$$

3.142.2 AI: Human-English to AI-Lean

Exercise_5_13.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Exercise_5_13.lean

3.143 Exercise 5.13

3.143.1 Human-English

EXERCISE 5.13. Prove the existence of a one-one function $\mathrm{num} : \mathbf{N} \times \mathbf{N} \to \mathbf{N}$ such that

$$\mathrm{num}(0, 0) = 0;$$

$$\mathrm{num}(n, m+1) = \mathrm{num}(n+1, m) + 1;$$

$$\mathrm{num}(n+1, 0) = \mathrm{num}(0, n) + 1.$$

Draw a picture (i.e. an infinite matrix) for the function and find a closed form for its values, if possible. Use the function to prove the isomorphism of the domains

$$P\mathbf{N},\ P(\mathbf{N} \times \mathbf{N}),\ P\mathbf{N} \times P\mathbf{N}.$$

3.143.2 AI: Human-English to AI-Lean

Exercise_5_13b.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Exercise_5_13b.lean

3.144 Exercise 5.14

3.144.1 Human-English

EXERCISE 5.14. Show that there are approximable mappings

$$\mathrm{graph} : (P\mathbf{N} \to P\mathbf{N}) \to P\mathbf{N} \quad \text{and} \quad \mathrm{fun} : P\mathbf{N} \to (P\mathbf{N} \to P\mathbf{N}),$$

where we have

$$\mathrm{fun} \circ \mathrm{graph} = \lambda f.\, f, \quad \text{and} \quad \mathrm{graph} \circ \mathrm{fun} \supseteq \lambda x.\, x.$$

(Hint: Using the notation

$$[n_0, n_1, \ldots, n_k] = \mathrm{num}(n_0, [n_1, \ldots, n_k])$$

two such combinators can be given by formulae

$$\mathrm{fun}(u)(x) = \{m \mid \exists n_0, \ldots, n_{k-1} \in x.\, [n_0 + 1, \ldots, n_{k-1} + 1, 0, m] \in u\}$$

$$\mathrm{graph}(f) = \{[n_0 + 1, \ldots, n_{k-1} + 1, 0, m] \mid m \in f(\{n_0, \ldots, n_{k-1}\})\}$$

where k is variable — meaning all finite sequences are to be considered.)

3.144.2 AI: Human-English to AI-Lean

Exercise_5_14.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Exercise_5_14.lean

3.145 Exercise 5.15

3.145.1 Human-English

EXERCISE 5.15. (For algebraists.) We can regard $\langle \{0,1\}^*, \Lambda, \cdot \rangle$ as the free semigroup on two generators 0 and 1. The powerset $P\{0,1\}^*$ is taken as a domain as in Exercise 4.17. For "words" $e \in \{0,1\}^*$ define

$$e^* = \{\Lambda, e, e^2, e^3, \ldots, e^n, \ldots\}.$$

Show that the least fixed point of

$$z = \{e\} \cdot z \cup \{e'\}$$

in $P\{0,1\}^*$ is $z = e^* \cdot \{e'\}$.
Show further (as suggested by David Park) that the least solution of

$$x = a \cdot x \cup b \cdot y \cup c,$$
$$y = b \cdot x \cup a \cdot y \cup d$$

has

$$x = (a \cup b \cdot a^* \cdot b)^* \cdot (c \cup b \cdot a^* \cdot d),$$

where the $\{\cdot\}$ has been dropped off $\{a\}$, $\{b\}$ etc., and where the *-notation has been extended to the whole domain, so that $z^* = \Lambda \cup z^* \cdot z$.
(Hint: Apply 5.3.)

3.145.2 AI: Human-English to AI-Lean

Exercise_5_15.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Exercise_5_15.lean

3.146 Exercise 5.16

3.146.1 Human-English

EXERCISE 5.16. Return to the discussion of Example 4.4 and the construction of the domain of finite and infinite binary sequences. Give a fixed-point definition of $\mathrm{neg} : C \to C$, where

$$\mathrm{neg}(0x) = 1\,\mathrm{neg}(x); \qquad \mathrm{neg}(1x) = 0\,\mathrm{neg}(x).$$

Prove that $\mathrm{neg}(\mathrm{neg}(x)) = x$ for all $x \in |C|$. Also define $\mathrm{merge} : C \times C \to C$, where for $\epsilon, \delta \in \{0, 1\}$ we have:

$$\mathrm{merge}(\epsilon x, \delta y) = \epsilon\,\delta\,\mathrm{merge}(x, y).$$

(Note: There may be a little trouble with $\mathrm{merge}(x, y)$ when x is finite and total and y is infinite—you have to decide what you want in e.g. $\mathrm{merge}(\Lambda, y)$.) Prove that

$$\mathrm{merge}(x, x) = d(x),$$

in the notation of 4.4. Consider also the infinite non-periodic sequence

$$t = 0\,\mathrm{merge}(\mathrm{neg}(t), \mathrm{tail}(t)).$$

Prove that the nth digit of t is the sum mod 2 of the digits of the number n written in the binary scale (a suggestion of J. Lambek). Show also that $t \neq u\,a\,a\,a\,v$ where a is any finite sequence $\neq \Lambda$, and where u is finite.

3.146.2 AI: Human-English to AI-Lean

Exercise_5_16.lean

Lean source: DomainTheory/NeighbourhoodSystems/TypedLambdaCalculus/Exercise_5_16.lean

3.147 Domain equations

Dependency diagram. Each box is one item. The arrowhead is on the item that imports. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it is not shown. Blue is a definition, green a proposition or lemma, amber an example, red a theorem, and indigo an exercise.

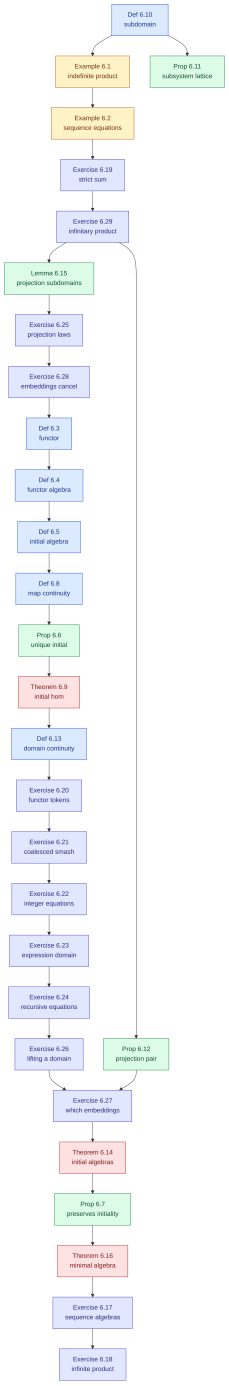


Figure 21: Domain equations.

3.148 Introduction

3.148.1 Human-English

3.149 LECTURE VI

INTRODUCTION TO DOMAIN EQUATIONS

The major reason for introducing the theory of domains is to have a notion of *computability* incorporating both finite and infinite elements. In our many examples already explored we have seen how functions (functionals, operators, combinators) can be defined on domains; owing to the property of *approximability (continuity)* of these functions, we have also seen how they can be "calculated" by finite approximation. In this lecture further examples of domains will be constructed – especially domains having infinite elements, which can be introduced in a variety of ways giving rise to interesting structural possibilities. The next lecture then treats a precise notion of *computability* appropriate to these domains; while the last lecture opens up new methods of domain construction.

3.150 Example 6.1

3.150.1 Human-English

EXAMPLE 6.1. Let D be fixed as a given domain. We are now familiar with a useful construct like $D \times D$ whose elements are ordered pairs $\langle x, y\rangle$ of elements x, y of D. The question is: can this construct be iterated? The answer is obviously yes, since $D \times (D \times D)$ and $(D \times D) \times (D \times D)$ and so on can be formed with elements $\langle x, \langle y, z\rangle\rangle$ and $\langle\langle u, v\rangle, \langle x, y\rangle\rangle$ and the like. But the real question is: can the construct be iterated *indefinitely*? AND can the results be collected together into a *single* domain? The answer is yes, but it requires a bit of work to get it right. The method to be introduced will be open to many variations, so more than one answer is possible, giving non-isomorphic domains.

In order to collect all the iterates into one large domain we give ourselves first a very big domain inside of which the desired family of neighbourhoods will be found. There are many ways to make this choice, and we are fixing on one that will keep the notation simple. We have often used binary sequences for examples and constructions, but for this example let us use

ternary sequences. Let $\Sigma = \{0, 1, 2\}$ and let Σ^* be all finite sequences from this three-letter alphabet. We will select subsets of Σ^* for our neighbourhoods. As Σ^* is countably infinite, it is without much loss of generality to assume that $\mathcal{D}$ is a neighbourhood system over Δ, where we take $\Delta \subseteq \Sigma^*$. Also without loss of generality we can assume $\emptyset \notin \mathcal{D}$. (Why?)

We wish to find another set $\Gamma \subseteq \Sigma^*$ to be the set of tokens for the new domain. After we find it, we will still have to say just which $X \subseteq \Gamma$ are appropriate for the structure we want.

The totality $\{X \mid X \subseteq \Sigma^*\}$ is, as a powerset, isomorphic to the set of elements of a domain: a point we have remarked several times. So, by the Fixed-Point Theorem we know there is a set $\Gamma \subseteq \Sigma^*$ where

$$\Gamma = 0\Delta \cup 1\Gamma \cup 2\Gamma.$$

In fact $\Gamma = \{1, 2\}^*0\Delta$, because we can say:

$$\{1, 2\}^* = \{\Lambda\} \cup 1\{1, 2\}^* \cup 2\{1, 2\}^*.$$

The domain we are looking for will be found as a domain $\mathcal{D}^{\S}$ over Γ. The reason for splitting Γ up, as shown in the equation above, is to ensure that if $X, Y \in \mathcal{D}^{\S}$ are two neighbourhoods in the system $\mathcal{D}^{\S}$, then $1X \cup 2Y$ has a chance of being also in $\mathcal{D}^{\S}$ because

$$1X \cup 2Y \subseteq \Gamma.$$

This will make $\mathcal{D}^\S \times \mathcal{D}^\S$ isomorphic to a part of $\mathcal{D}^\S$. If we make $\mathcal{D}$ also isomorphic to a part of $\mathcal{D}^\S$, then all the iterated products will be contained in $\mathcal{D}^\S$.

What is a neighbourhood system? Just a set of sets. But $\mathcal{PP}\Sigma^*$ is a domain (as a power set) and because $\Gamma \subseteq \Sigma^*$, we find

$$\mathcal{D}^\S \in \mathcal{PP}\Sigma^*$$

as an element. But elements of domains can often be defined by fixed-point equations. Indeed we will introduce $\mathcal{D}^\S$ this way:

$$\mathcal{D}^\S = \{\Gamma\} \cup \{0X \mid X \in \mathcal{D}\} \cup \{1X \cup 2Y \mid X, Y \in \mathcal{D}^\S\}.$$

The reader should stop to think why $\mathcal{D}^\S$ can be immediately seen to exist by writing such an equation. Of course another way to describe $\mathcal{D}^\S$ is to say it is the least family of sets containing (i) the set Γ, (ii) the sets $0X$ for X in the given system $\mathcal{D}$, and (iii) sets $1X \cup 2Y$ whenever it already contains X and Y (closure under a set-forming operation). By saying "least" we mean (iv) nothing else belongs to $\mathcal{D}^\S$ except as allowed by (i)–(iii); this makes the truth of the equation for $\mathcal{D}^\S$ clear. So $\mathcal{D}^\S$ exists as a family of sets, but what good is it?

By our construction of Γ, all the sets we put into $\mathcal{D}^\S$ are subsets of Γ (why?); so $\mathcal{D}^\S$ has a chance of being a system over Γ if we can check the closure under intersection. So suppose $Z \subseteq X \cap Y$ where $Z, X, Y \in \mathcal{D}^\S$; we want to show $X \cap Y \in \mathcal{D}^\S$. We argue by induction on the number of steps required to put X and Y into $\mathcal{D}^\S$ by (i)–(iii). There are several cases.

If $X = \Gamma$ or $Y = \Gamma$, there is nothing to prove, because both sets are subsets of Γ. We note that $\emptyset \notin \mathcal{D}^\S$, because (i)–(iii) cannot introduce $\emptyset$ as a member of $\mathcal{D}^\S$. So, if $X = 0A$ for $A \in \mathcal{D}$, then Y must have this form also (if it is not Γ), because

$$0A \cap (1B \cup 2C) = \emptyset.$$

(That is, if Y had the form (iii), then $Z = \emptyset$ would be a consequence, which is impossible.) Thus, if $X = 0A$ for $A \in \mathcal{D}$, then $Y = 0B$ for some $B \in \mathcal{D}$. But by the same reasoning $Z = 0C$ for some $C \in \mathcal{D}$ also. But the relationship $0C \subseteq 0A \cap 0B$ is equivalent to $C \subseteq A \cap B$. We see, therefore, that $A \cap B \in \mathcal{D}$, and so

$$X \cap Y = 0A \cap 0B = 0(A \cap B)$$

must belong to $\mathcal{D}^\S$.

The final case has X, Y, Z all of the form (iii):

$$X = 1A_1 \cup 2A_2,$$

$$Y = 1B_1 \cup 2B_2, \text{ and}$$

$$Z = 1C_1 \cup 2C_2.$$

We can think of the A_i and B_i put into $\mathcal{D}^\S$ earlier and the intersection result as being already established for them. But the relationship $Z \subseteq X \cap Y$ is equivalent to $C_i \subseteq A_i \cap B_i$ for $i = 1, 2$. Therefore $A_i \cap B_i \in \mathcal{D}^\S$, and so does

$$X \cap Y = (1A_1 \cup 2A_2) \cap (1B_1 \cup 2B_2) = 1(A_1 \cap B_1) \cup 2(A_2 \cap B_2).$$

We have now seen that $D^\S$ is a neighbourhood system, but why was it constructed that way? The reason is simply this isomorphism (or domain equation):

$$D^\S \cong D + (D^\S \times D^\S),$$

as can be seen by reference to the equation for $D^\S$ and the definitions of $+$ and $\times$. What are the elements of $D^\S$? There is always

$$\bot = \{\Gamma\}.$$

Next if $x \in |D|$ we define

$$x^\S = \{\Gamma\} \cup \{0X \mid X \in x\}.$$

That gives an isomorphic injection

$$\lambda x.\, x^\S : D \to D^\S.$$

Then for $x, y \in |D^\S|$ we can define

$$\langle x, y \rangle = \{\Gamma\} \cup \{1X \cup 2Y \mid X \in x \text{ and } Y \in y\}.$$

We have another isomorphic injection


$$\lambda x, y.\, \langle x, y \rangle : D^\S \times D^\S \to D^\S.$$

Indeed by looking at the neighbourhood definition of $D^\S$ we conclude that the *finite* elements of $D^\S$ are exactly those that are either of the form (i) $\bot$, or (ii) $a^\S$, where a is finite in $|D|$, or (iii) $\langle a, b \rangle$, where a and b are previously obtained finite elements of $|D^\S|$.

Suppose $a, \ldots, f$ are finite in $|D|$. We can picture the element

$$u = \langle \langle a^\S, \langle \langle b^\S, c^\S \rangle, d^\S \rangle \rangle, \langle e^\S, f^\S \rangle \rangle$$

in $|D^\S|$ as a tree:




Note that the tree has binary branching with the elements of $|D|$ at the ends of the branches. Any such tree could be given a notation as an element of $|D^{\S}|$. The finite elements of $|D^{\S}|$ correspond exactly to such finite trees.

What of the infinite elements of $|D^{\S}|$? Are there infinite trees? Let $a, b \in |D^{\S}|$ be any elements of $|D^{\S}|$. Since pairing is an approximable mapping, we can solve the fixed-point equation

$$
v = \langle a, \langle b, v \rangle \rangle.
$$

In pictures we can diagram v roughly as:

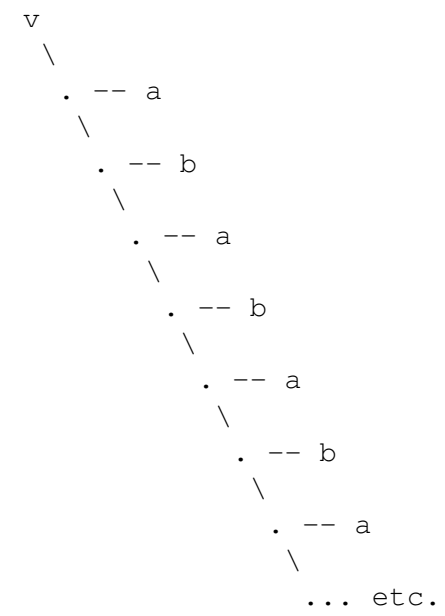

The word is ?roughly? here, since if a or b were not in the $|D|$ part of $|D^{\S}|$, then in the diagram the letters ?a? and ?b? should be replaced by the corresponding tree diagrams for a and b.

Suppose that a and b are finite. Then we can easily see that the infinite tree v is the limit of the following sequence of finite trees:

$$
v_0 = \bot,
$$

$$
v_{n+1} = \langle a, \langle b, v_n \rangle \rangle,
$$

and

$$
v = \bigcup_{n=0}^{\infty} v_n.
$$

The reader should think how to explain from tree diagrams the approximation relation $v_n \sqsubseteq v$ and more general such relationships.

We could call $D^\S$ a tree algebra over D. There may be others. A general one is a structure of the form

$$
\langle E, \text{in}, \text{pair} \rangle,
$$

where

$$
\text{in} : D \to E, \text{ and}
$$

$$
\text{pair} : E \times E \to E.
$$

The algebra

$$
\langle D^\S, \lambda x.\, x^\S, \lambda x, y.\, \langle x, y \rangle \rangle,
$$

however, is a very special one: it is "minimal" among all tree algebras over D in a sense we shall have to make precise.

To do this think of how E and $D^\S$ can differ. In view of the isomorphism that $D^\S$ satisfies, the injection of D and the pairing are one-one, so no "information" is lost by these mappings. The same may not at all be true of E, but it is reasonable to think that at least we can define an approximable mapping $g : D^\S \to E$ where

$$
(1) \quad g(\bot) = \bot_E,
$$

$$
(2) \quad g(x^\S) = \text{in}(x), \text{ for } x \in |D|, \text{ and}
$$

$$
(3) \quad g(\langle x, y \rangle) = \text{pair}(g(x), g(y)), \text{ for } x, y \in |D^\S|.
$$

By what we said earlier, g will be uniquely determined by (1)-(3), because these equations tell us exactly how to calculate g on all finite elements of $|D^\S|$.

An approximable mapping is always determined by its action on the finite elements. But why does g exist?

It would not be too hard to give an inductive construction of g as a neighbourhood relation, but a fixed-point equation is easier to write down for the same purpose. We need, though, to have the inverse ("predecessor") functions:

$$
\text{out} : D^\S \to D
$$

$$
\text{proj}_i : D^\S \to D^\S, \text{ for } i = 0, 1,
$$

where

$$
\text{out}(x^\S) = x,
$$

$$
\text{proj}_0(\langle x, y \rangle) = x, \text{ and}
$$

$$
\text{proj}_1(\langle x, y \rangle) = y.
$$

We also need

$$
\text{atom} : D^\S \to T,
$$

where

$$
\text{atom}(x^\S) = \mathrm{true}, \text{ and}
$$

$$
\text{atom}(\langle x, y \rangle) = \mathrm{false}.
$$

We can then write

$$
g(x) = \text{cond}\bigl(\text{atom}(x),\, \text{in}(\text{out}(x)),\, \text{pair}(g(\text{proj}_0(x)),\, g(\text{proj}_1(x)))\bigr).
$$

This g exists by fixed-point theory, and it satisfies (1)-(3) by what we know about the structure of $|D^\S|$. As we said, g is unique because the values on finite

```
    elements are fixed.

In algebraic language $g$ is a *homomorphism* of tree algebras; and $D^\S$ is called
    an *initial algebra*, because for any tree algebra $E$ there is a unique
    homomorphism $g : D^\S \to E$. We note at once that any two initial algebras are
    isomorphic. For if $D^*$ were another, there would exist homomorphisms in both
    directions between $D^\S$ and $D^*$. But the compositions of homomorphisms are
    again homomorphisms, and in the case of $D^\S$ if we go from $D^\S$ to $D^*$ and
    back to $D^\S$, the result must be the identity. The reason is that the identity
    can be the only homomorphism of an initial algebra into itself. We thus have a
    precise meaning of the minimal character of $D^\S$. But note it still took a
    construction to show that the domain $D^\S$ exists. $\square$



#### AI: Human-English to AI-Lean

**[Example_6_1.lean](Example_6_1.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Example_6_1.lean`](
    DomainTheory/NeighbourhoodSystems/DomainEquations/Example_6_1.lean)

### Example 6.2

#### Human-English

**EXAMPLE 6.2.** Our staple examples $B$ and $C$ satisfy ?domain equations? in the
    form of isomorphisms as we have previously seen. Indeed

$$
B \cong B + B, \text{ and}
$$

$$
C \cong \{\{\Lambda\}\} + C + C,
$$

where if we liked we could construct both systems over $\{0,1\}^*$ and have:

$$
B = \{\{0,1\}^*\} \cup \{0X \mid X \in B\} \cup \{1X \mid X \in B\}, \text{ and}
$$

$$
C = \{\{0,1\}^*\} \cup \{\{\Lambda\}\} \cup \{0X \mid X \in C\} \cup \{1X \mid X \in C
    \}.
$$

We leave to the exercises the explanations of what kinds of algebras $B$ and $C$ are
    and why they are initial. Here we want to propose a simple, yet interesting
    generalization of $B$.

Consider this domain equation:

$$
A \cong A^n + A^n,
```

$$

where A^n stands for the n-fold cartesian power of A. We can, with the aid of some encoding solve this equation as a neighbourhood system over $\{0,1\}^*$ as follows:

$$
A = \{\{0,1\}^*\} \cup \bigcup_{i=0,1} \left\{ i \bigcup_{j < n} 1^j 0 X_j \mid X_j \in A \text{ for all } j < n \right\}.
$$

For instance, if $n = 3$, then a typical neighbourhood in A is something like


$$
00X_0 \cup 010X_1 \cup 0110X_2,
$$

where $X_0, X_1, X_2 \in A$. The first ?0? could also be a ?1? in front of each of the terms.

In words, an element of A (other than $\bot$) is an n-tuple of elements of A: but there are two separate copies of these, the left one and the right one. We can write for $a \in |A|$

$$
a = \pm \langle a_0, a_1, \ldots, a_{n-1} \rangle,
$$

where $+$ is chosen if a is on the right, and $-$ if on the left. As a tree diagram a might look like this for $n = 3$:

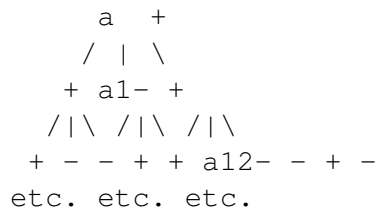

That is, a is an infinite ternary tree with $+$ or $-$ labels at each node. If each node (subtree) is truly infinite, the element is *total*; if $\perp$ is ever encountered, it is only *partial*; if every branch ends with $\perp$, the tree is a *finite element* of $|A|$.

What can be done with such trees? Let $\sigma \in \{0, 1, \ldots, n-1\}^*$ be a finite sequence of "digits" each less than n. We let $\Sigma = \{0, 1, \ldots, n-1\}$. We can define for $a \in |A|$ the operation $\sigma \mapsto a\sigma$ by recursion on σ:

$$
a \Lambda = a, \text{ and}
$$

$$

```
a i \sigma = (a_i) \sigma.
$$

The $a\sigma$ are just the *subtrees* of $a$ with $\sigma$ as a *selector*. We also
    have a map

$$
\mathrm{pos} : A \to T
$$

where

$$
\mathrm{pos}(+\langle a_0, a_1, \ldots, a_{n-1} \rangle) = \mathrm{true}, \text{ and}
$$

$$
\mathrm{pos}(-\langle a_0, a_1, \ldots, a_{n-1} \rangle) = \mathrm{false}.
$$

We say that a (total) tree $a$ is *eventually periodic* iff the set $\{a\sigma \mid \
    sigma \in \Sigma^*\}$ is finite. The result is that the "language"

$$
L_a = \{\sigma \in \Sigma^* \mid \mathrm{pos}(a\sigma) = \mathrm{true}\}
$$

corresponding to an eventually periodic tree is always a *regular event* of automata
    theory, and every such language has this form. In fact, $a$ just represents the
    initial state of an automaton, and $a\sigma$ represents the state after "reading" a
     tape $\sigma$. $\square$



In order to formulate more generally the idea of a domain equation and initial algebra
    , we must introduce a small amount of the terminology of category theory. To be as
    specific as possible, think of systems $D$ over sets $\Delta \subseteq \Sigma^*$
    with $\Sigma = \{0, 1\}$, say. They form quite an interesting category with respect
     to the approximable maps $f : D \to D'$. Recall that to be a category of "domains"
     and "maps" all that is required is an associative composition $g \circ f$ of maps
    with identity maps $I : D \to D$ for each domain of the category. And this we
    certainly have for the systems indicated. And there are many other categories
    waiting around: for instance, restrict systems to those where $\emptyset \notin D$.
     This is not much of a restriction, as every system is isomorphic to one like this.
     Or restrict the maps to being the strict maps $f : D \to D'$ where $f(\bot_D) = \
    bot_{D'}$. This is an essentially different, though related category. We shall find
     many others.

What examples 6.1 and 6.2 suggest is the notion of a construct which makes new domains
     out of old. For example, with $D$ fixed, 6.1 suggests for any domain $X$ over $\
    Gamma \subseteq \Sigma^*$ a domain

$$
T(X) = D + (X \times X).
$$
```

```
More specifically (converting from $\Sigma = \{0, 1, 2\}$ to $\Sigma = \{0, 1\}$) we
    could write

$$
T(X) = \{\Gamma'\} \cup \{0X \mid X \in D\} \cup \{10X \cup 11Y \mid X, Y \in X\},
$$

where we have $\Gamma' = 0\Delta \cup 10\Gamma \cup 11\Gamma$. (By the way, here we
    definitely want to assume $\emptyset \notin D$ and $\emptyset \notin X$ and to get
    $\emptyset \notin T(X)$.) This construct is an example of a *functor*, a notion
    that can be defined abstractly on any category.

#### AI: Human-English to AI-Lean

**[Example_6_2.lean](Example_6_2.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Example_6_2.lean`](
    DomainTheory/NeighbourhoodSystems/DomainEquations/Example_6_2.lean)

### Definition 6.3

#### Human-English

**DEFINITION 6.3.** A *functor* on a category (into itself) associates with every
    domain $X$ in the category another domain $T(X)$ and to every map

$$
f : X \to Y
$$

another map

$$
T(f) : T(X) \to T(Y)
$$



in such a way that identity maps and compositions are preserved:

$$
T(I_X) = I_{T(X)}, \text{ and}
$$

$$
T(g \circ f) = T(g) \circ T(f),
$$

whenever $f : X \to Y$ and $g : Y \to Z$. $\square$

In the example from 6.1 we have not checked how the special **T** is a functor. The
    hint is that whenever $f : X \to Y$, then there is a map

$$
f \times f : X \times X \to Y \times Y.
$$
```

```
But there is also a map

$$
I_D + f \times f : D + (X \times X) \to D + (Y \times Y)
$$

and this suggests the definition of $T(f)$. The details are left to the exercises.
    Note that the map $T(f)$ just suggested is always strict, so **T** is a functor
    also for the category of strict maps.

One good reason for a little of the category-theoretic language is that the next
    definition becomes very neat indeed.

#### AI: Human-English to AI-Lean

**[Definition_6_3.lean](Definition_6_3.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Definition_6_3.lean
    `](DomainTheory/NeighbourhoodSystems/DomainEquations/Definition_6_3.lean)

### Definition 6.4

#### Human-English

**DEFINITION 6.4.** A ***T*-algebra** is a domain $E$ in the category together with a
    map

$$
k : T(E) \to E.
$$

If $m : T(F) \to F$ is another ***T*-algebra**, then a *homomorphism* is a map $h : E
    \to F$ in the category such that the diagram

$$
\begin{array}{ccc}
T(E) & \xrightarrow{k} & E \\
\downarrow{T(h)} & & \downarrow{h} \\
T(F) & \xrightarrow{m} & F
\end{array}
$$

commutes; that is, the equation

$$
h \circ k = m \circ T(h)
$$

holds. $\square$



In our example from 6.1 a $T$-algebra is a *strict* map

$$k : D + (E \times E) \to E.$$
```

But such strict maps are in a one-one correspondence with pairs of (not necessarily strict) maps

$$n : D \to E \quad \text{and} \quad p : E \times E \to E.$$

And the structure $\langle E, n, p \rangle$ is what we called a tree algebra. Definition 6.4 just makes this abstract. The reader should also work out the details showing that 6.4's definition of homomorphism is just what we ought to expect.

Note that the T-algebras and homomorphisms form a category. (Why?) The following definition is so abstract that it could be given for any category.

AI: Human-English to AI-Lean

Definition_6_4.lean

Lean source: [`DomainTheory/NeighbourhoodSystems/DomainEquations/Definition_6_4.lean`](DomainTheory/NeighbourhoodSystems/DomainEquations/Definition_6_4.lean)

Definition 6.5

Human-English

DEFINITION 6.5. A T-algebra is *initial* if and only if there is a unique homomorphism from it into any other T-algebra. $\square$

The word "other" here is not meant to imply "distinct". For an initial algebra there is one and only one homomorphism into itself: the identity map. As we already indicated in 6.1 it is a general fact that the next proposition holds.

AI: Human-English to AI-Lean

Definition_6_5.lean

Lean source: [`DomainTheory/NeighbourhoodSystems/DomainEquations/Definition_6_5.lean`](DomainTheory/NeighbourhoodSystems/DomainEquations/Definition_6_5.lean)

Proposition 6.6

Human-English

PROPOSITION 6.6. Any two initial T-algebras are uniquely isomorphic. $\square$

Slightly more interesting is the behaviour of T on initial algebras.

AI: Human-English to AI-Lean

Proposition_6_6.lean

Lean source: [`DomainTheory/NeighbourhoodSystems/DomainEquations/Proposition_6_6.lean`](DomainTheory/NeighbourhoodSystems/DomainEquations/Proposition_6_6.lean)

Proposition 6.7

Human-English

PROPOSITION 6.7. If $i : T(D) \to D$ is an initial T-algebra, then so is $T(i) : T^2(D) \to T(D)$ and i is the isomorphism from $T(D)$ to D.

Proof: Clearly since T is a functor, the map $T(i)$ has the right mapping character to make $T(D)$ a T-algebra. Since D is initial, we have a commuting diagram:

$$
\begin{array}{ccc}
T(D) & \xrightarrow{i} & D \\
\downarrow{T(j)} & & \downarrow{j} \\
T^2(D) & \xrightarrow{T(i)} & T(D)
\end{array}
$$

But we also have the trivial diagram:

$$
\begin{array}{ccc}
T^2(D) & \xrightarrow{T(i)} & T(D) \\
\downarrow{T(i)} & & \downarrow{i} \\
T(D) & \xrightarrow{i} & D
\end{array}
$$

It follows that $i \circ j$ is a homomorphism, so

$$
i \circ j = I_D.
$$

But then because T is a functor we find:

$$
T(i) \circ T(j) = I_{T(D)},
$$

and, since j is a homomorphism, we have

$$
j \circ i = I_{T(D)}.
$$

This shows that i is an isomorphism. $\square$

From 6.7 we see that if we are going to have initial algebras at all we have to satisfy the domain equation

$$
D \cong T(D).
$$

But generally that is not enough to assure that D is initial. There is a condition that our functors satisfy, however, which guarantees the existence of homomorphisms .

AI: Human-English to AI-Lean

Proposition_6_7.lean

Lean source: [`DomainTheory/NeighbourhoodSystems/DomainEquations/Proposition_6_7.lean`](DomainTheory/NeighbourhoodSystems/DomainEquations/Proposition_6_7.lean)

Definition 6.8

Human-English

DEFINITION 6.8. On the category of domains and strict approximable maps a functor T is *continuous on maps* if for any systems D and E the induced mapping

$$
\lambda f.\, T(f) : (D \to_\bot E) \to (T(D) \to_\bot T(E))
$$

is approximable.

AI: Human-English to AI-Lean

Definition_6_8.lean

Lean source: [`DomainTheory/NeighbourhoodSystems/DomainEquations/Definition_6_8.lean`](DomainTheory/NeighbourhoodSystems/DomainEquations/Definition_6_8.lean)

Theorem 6.9

Human-English

THEOREM 6.9. If the functor T is continuous on maps and if $D \cong T(D)$, so in particular D is a T-algebra, then for any T-algebra $k : T(E) \to E$ there is a homomorphism $h : D \to E$.

Proof: Let $i : T(D) \to D$ make D a T-algebra, where $j : D \to T(D)$ is the inverse so that i is an isomorphism of domains. Suppose that $k : T(E) \to E$ is any T-algebra. A homomorphism $h : D \to E$ would satisfy

$$
h \circ i = k \circ T(h).
$$

Rewrite this equation as

$$
h = k \circ T(h) \circ j.
$$

In the domain of strict maps $(D \to E)$ this is a fixed-point equation for an

approximable map

$$
\lambda h.\, k \circ T(h) \circ j
$$

by our assumption on T. Thus, the desired homomorphism exists. $\square$

The final question we have to answer is why in our category the minimal D exist. The reason is that the functors T that we have in mind possess further continuity properties on domains. This is conveniently expressed in terms of a notion of "subdomain".

AI: Human-English to AI-Lean

Theorem_6_9.lean

Lean source: [`DomainTheory/NeighbourhoodSystems/DomainEquations/Theorem_6_9.lean`](DomainTheory/NeighbourhoodSystems/DomainEquations/Theorem_6_9.lean)

Definition 6.10

Human-English

DEFINITION 6.10. For two neighbourhood systems D and E we write

$$
D \triangleleft E
$$

to mean that these are neighbourhood systems over the same set of tokens Δ and not only is $D \subseteq E$ but whenever $X, Y \in D$ and $X \cap Y \in E$, then $X \cap Y \in D$. $\square$

For the subdomain relation $D \triangleleft E$ to hold, D has to be a smaller family of neighbourhoods, but the notion of consistency in D also has to be the same as in E. Note that if $D_0 \triangleleft E$ and $D_1 \triangleleft E$ then

$$
D_0 \triangleleft D_1 \text{ iff } D_0 \subseteq D_1.
$$

It is also easy to prove that the union of a directed family of subdomains of E is again a subdomain. As a consequence of this remark we have:

AI: Human-English to AI-Lean

Definition_6_10.lean

Lean source: [`DomainTheory/NeighbourhoodSystems/DomainEquations/Definition_6_10.lean`](DomainTheory/NeighbourhoodSystems/DomainEquations/Definition_6_10.lean)

Proposition 6.11

Human-English

PROPOSITION 6.11. For a given neighbourhood system E, the set of subsystems

$$
\{D \mid D \triangleleft E\}
$$

forms a domain in its own right. $\square$

The subdomain relationship implies a mapping relationship between the domains.

AI: Human-English to AI-Lean

Proposition_6_11.lean

Lean source: [`DomainTheory/NeighbourhoodSystems/DomainEquations/Proposition_6_11.lean`](DomainTheory/NeighbourhoodSystems/DomainEquations/Proposition_6_11.lean)

Proposition 6.12

Human-English

PROPOSITION 6.12. If $D \triangleleft E$, then there exists a projection pair of approximable mappings:

$$
i : D \to E \quad \text{and} \quad j : E \to D
$$

where $j \circ i = I_D$ and $i \circ j \subseteq I_E$, which are determined as element-wise functions by these equations:

$$
i(x) = \{Y \in E \mid \exists X \in x.\, X \subseteq Y\},
$$

and

$$
j(y) = y \cap D,
$$

for all $x \in |D|$ and $y \in |E|$. $\square$

The proof is left for the exercises.

AI: Human-English to AI-Lean

Proposition_6_12.lean

Lean source: [`DomainTheory/NeighbourhoodSystems/DomainEquations/Proposition_6_12.lean`](DomainTheory/NeighbourhoodSystems/DomainEquations/Proposition_6_12.lean)

Definition 6.13

Human-English

DEFINITION 6.13. A functor T is *monotone on domains* iff whenever $D \triangleleft E$, then not only do we have $T(D) \triangleleft T(E)$ but the projection pair i, j of 6.12 is mapped to the same kind of projection pair $T(i), T(j)$. A monotone functor is *continuous on domains* iff whenever E is a domain, then the mapping

$$
\lambda D.\, T(D) : \{D \mid D \triangleleft E\} \to \{D' \mid D' \triangleleft T(E)\}
$$

is approximable. $\square$

We can now state an existence theorem that covers in fairly wide generality the examples of this lecture.

AI: Human-English to AI-Lean

Definition_6_13.lean

Lean source: [`DomainTheory/NeighbourhoodSystems/DomainEquations/Definition_6_13.lean`](DomainTheory/NeighbourhoodSystems/DomainEquations/Definition_6_13.lean)

Theorem 6.14

Human-English

THEOREM 6.14. If the functor T is continuous on maps and monotone and continuous on domains, and if there is a set Γ such that

$$\{\Gamma\} \triangleleft T(\{\Gamma\}),$$

then there exists an initial T-algebra.

Proof: We proceed as in the proof of the fixed-point theorem by iterating the functor. The assumption about Γ means that, as a neighbourhood system, $T(\{\Gamma\})$ is a system over the same set Γ. Thus, if we iterate T to form $T^n(\{\Gamma\})$, all these systems are over Γ and indeed

$$T^n(\{\Gamma\}) \triangleleft T^{n+1}(\{\Gamma\})$$

for all n. We can thus introduce

$$\mathcal{D} = \bigcup_{n=0}^{\infty} T^n(\{\Gamma\}),$$

and it is easy to check that $\mathcal{D}$ is a system over Γ and

$$T^n(\{\Gamma\}) \triangleleft \mathcal{D}$$

holds for all n. But then we have for all n:

$$T^n(\{\Gamma\}) \triangleleft T^{n+1}(\{\Gamma\}) \triangleleft T(\mathcal{D}),$$

which implies $\mathcal{D} \triangleleft T(\mathcal{D})$. But T is continuous on domains, so

$$
\begin{aligned}
T(\mathcal{D}) &= T\!\left(\bigcup_{n=0}^{\infty} T^n(\{\Gamma\})\right) \\
&= \bigcup_{n=0}^{\infty} T^{n+1}(\{\Gamma\}) \\
&= \mathcal{D}.
\end{aligned}
$$

Thus, not only is $\mathcal{D}$ a T-algebra, but the isomorphism we get for $\mathcal{D}$ and $T(\mathcal{D})$ is just the identity mapping. We know by 6.9 that homomorphisms exist; what remains to show is that homomorphism from $\mathcal{D}$ are unique. As in the examples, we will show in effect they are determined uniquely on the finite elements of $\mathcal{D}$.

Since each $T^n(\{\Gamma\}) \triangleleft \mathcal{D}$, there are projection mappings $i_n : T^n(\{\Gamma\}) \to \mathcal{D}$ and $j_n : \mathcal{D} \to T^n(\{\Gamma\})$.

Define $\rho_n : \mathcal{D} \to \mathcal{D}$ by $\rho_n = i_n \circ j_n$. Projection pairs are always pairs of strict mappings (Why?), and so are in the category. By assumption and 6.13, the functor T preserves these maps, so we have

$$
T(\rho_n) = T(i_n) \circ T(j_n) = i_{n+1} \circ j_{n+1} = \rho_{n+1}.
$$

As a neighbourhood relation ρ_n can be characterized by :

$$
X \rho_n Y \quad \text{iff} \quad \exists z \in T^n(\{\Gamma\}).\; X \subseteq z \subseteq Y.
$$

We thus see that $\rho_n \subseteq \rho_{n+1}$ and

$$
\bigcup_{n=0}^{\infty} \rho_n = I_{\mathcal{D}}.
$$

Now suppose $k : T(E) \to E$ is any T-algebra and $h : \mathcal{D} \to E$ is a homomorphism. The mapping will satisfy the fixed-point equation

$$
h = k \circ T(h),
$$

where no other mappings need be written in because $\mathcal{D} = T(\mathcal{D})$ and so

$$
T(h) : \mathcal{D} \to T(E).
$$

$$

We wish to show that h really is the least fixed point of this equation.

Define $h_n = h \circ \rho_n : \mathcal{D} \to E$. For $n = 0$, the map ρ_0 is the trivial map where $\rho_0(x) = \bot_{\mathcal{D}}$ for all $x \in |\mathcal{D}|$. But h must be strict, so $h_0(x) = \bot_E$ for all $x \in |\mathcal{D}|$; that is, h_0 is the least element of $|\mathcal{D} \to_\bot E|$. Now calculate :

$$
\begin{aligned}
k \circ T(h_n) &= k \circ T(h) \circ T(\rho_n) \\
&= h \circ \rho_{n+1} \\
&= h_{n+1} \ .
\end{aligned}
$$

This shows that the union of the h_n is the least fixed point of $\lambda h.\, k \circ T(h)$. But

$$
\begin{aligned}
\bigcup_{n=0}^{\infty} h_n &= \bigcup_{n=0}^{\infty} h \circ \rho_n \\
&= h \circ \bigcup_{n=0}^{\infty} \rho_n \\
&= h \circ I_D = h,
\end{aligned}
$$

so the given h is in fact the least fixed point. The homomorphism is uniquely determined, and D is the initial T-algebra. $\square$

Having the existence of initial T-algebras, we can prove one more result that shows just how minimal they are. We need a lemma about projection pairs, first, that shows where sub-domains fit in. We write $D \trianglelefteq E$ as short for $D \cong D'$ for some $D' \triangleleft E$ in the following. The lemma gives a converse to 6.12.

AI: Human-English to AI-Lean

Theorem_6_14.lean

Lean source: [`DomainTheory/NeighbourhoodSystems/DomainEquations/Theorem_6_14.lean`](DomainTheory/NeighbourhoodSystems/DomainEquations/Theorem_6_14.lean)

Lemma 6.15

Human-English

LEMMA 6.15. For two neighbourhood systems D and E, if there exist a projection pair

$$
i : D \to E \quad \text{and} \quad j : E \to D
$$

```
with $j \circ i = I_D$ and $i \circ j \subseteq I_E$, then $D \triangleleftefteq E$ .

*Proof.* What we want to show is that $i$ maps finite elements to finite elements, and
     that the desired $D'$ is the image of $D$ in $E$.

Suppose $X \in D$. We can write:

$$
i(\uparrow X) = \bigcup \{ \uparrow Y \mid Y \in i(\uparrow X) \} \ .
$$

Applying $j$ to both sides we have:



$$
\uparrow X = j \circ i(\uparrow X) = \bigcup \{ j(\uparrow Y) \mid Y \in i(\uparrow X)
     \}.
$$

But then, since $X \in \uparrow X$, we find $X \in j(\uparrow Y)$ for some $Y \in i(\
    uparrow X)$. This implies

$$
\uparrow X \subseteq j(\uparrow Y); \text{ and so } i(\uparrow X) \subseteq i \circ j
    (\uparrow Y) \subseteq \uparrow Y.
$$

Since $\uparrow Y \subseteq i(\uparrow X)$ in any case, we conclude $i(\uparrow X) = \
    uparrow Y$. This proves finite elements are mapped to finite elements.

What of $\Delta$; that is, what is $i(\uparrow \Delta)$? We find, supposing $E$ to be
    a neighbourhood system over a set $\Delta'$, that since $\uparrow \Delta \subseteq
    j(\uparrow \Delta')$, then $i(\uparrow \Delta) \subseteq \uparrow \Delta'$ and so
    $i(\uparrow \Delta) = \uparrow \Delta'$. This means that $\Delta$ corresponds to $\
    Delta'$. So we have established that $\mathcal{D}$ is in an inclusion preserving
    one-one correspondence with a subset $\mathcal{D}'$ of $E$ where $\Delta' \in \
    mathcal{D}'$. But it remains to show that $\mathcal{D}'$ is a neighbourhood system
    and that $\mathcal{D}' \triangleleft E$ holds. All we really have to show is that $
    \mathcal{D}'$ is closed under intersection whenever the intersection belongs to $E$
    .

Suppose $Y', Z' \in \mathcal{D}'$ and $Y' \cap Z' \in E$. Let $X' = Y' \cap Z'$. We
    have, for suitable $Y, Z \in \mathcal{D}$,

$$
i(\uparrow Y) = \uparrow Y', \text{ and so } \uparrow Y = j(\uparrow Y'); \text{ and}
$$

$$
i(\uparrow Z) = \uparrow Z', \text{ and so } \uparrow Z = j(\uparrow Z').
$$

But $\uparrow Y' \subseteq \uparrow X'$ and $j(\uparrow Y') \subseteq j(\uparrow X')$;
     thus $Y \in j(\uparrow X')$. For similar reasons $Z \in j(\uparrow X')$. But then
```

```
    $X = Y \cap Z \in j(\uparrow X')$, and therefore $Y \cap Z \in \mathcal{D}$. (The
    element $j(\uparrow X')$ must be a filter.) Notice, however, that

$$
\uparrow Y \subseteq \uparrow X, \text{ and so } \uparrow Y' \subseteq i(\uparrow X);
    \text{ and}
$$

$$
\uparrow Z \subseteq \uparrow X, \text{ and so } \uparrow Z' \subseteq i(\uparrow X).
$$

It follows that $Y' \cap Z' = X' \in i(\uparrow X)$. On the other hand we already knew
     $X \in j(\uparrow X')$, which implies $i(\uparrow X) \subseteq \uparrow X'$. We
    may thus conclude that $i(\uparrow X) = \uparrow X'$. In other words $X' \in \
    mathcal{D}'$. $\square$



#### AI: Human-English to AI-Lean

**[Lemma_6_15.lean](Lemma_6_15.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Lemma_6_15.lean`](
    DomainTheory/NeighbourhoodSystems/DomainEquations/Lemma_6_15.lean)

### Theorem 6.16

#### Human-English

**THEOREM 6.16.** If on the category of domains and strict approximable maps the
    functor $T$ is continuous on maps, and if $D$ is an initial $T$-algebra, then for
    any system $E \cong T(E)$ we have $D \trianglelefteq E$.

**Proof:** There is a homomorphism $h : D \to E$. By 6.9 there is a homomorphism $g :
    E \to D$. Now $g \circ h : D \to D$ is also a homomorphism, so $g \circ h = I_D$
    because $D$ is initial. In view of 6.15, all we have to prove now is that $h \circ
    g \sqsubseteq I_E$.

Let the maps $i : T(D) \to D$ and $j : D \to T(D)$ give the isomorphism for $D$, and
    let $u : T(E) \to E$ and $v : E \to T(E)$ do the same for $E$. By the proof of 6.9
    we know

$$
g = i \circ T(g) \circ v \quad \text{and} \quad h = u \circ T(h) \circ j
$$

and each of these maps is the least fixed point of its respective equation. Let

$$
g_0 = \bot_{E \to D} \quad \text{and} \quad h_0 = \bot_{D \to E}
$$

and define by recursion

$$
```

```
g_{n+1} = i \circ T(g_n) \circ v \quad \text{and} \quad h_{n+1} = u \circ T(h_n) \circ
     j.
$$

By the fixed-point calculation

$$
g = \bigsqcup_{n=0}^{\infty} g_n \quad \text{and} \quad h = \bigsqcup_{n=0}^{\infty}
    h_n.
$$

Now we see that

$$
h_0 \circ g_0 = \bot_{E \to E},
$$

and for each $n$ that

$$
\begin{aligned}
h_{n+1} \circ g_{n+1} &= u \circ T(h_n) \circ j \circ i \circ T(g_n) \circ v \\
&= u \circ T(h_n) \circ T(g_n) \circ v \\
&= u \circ T(h_n \circ g_n) \circ v.
\end{aligned}
$$

But this means that

$$
h \circ g = \bigsqcup_{n=0}^{\infty} (h_n \circ g_n)
$$

is the least fixed point for the equation

$$
k = u \circ T(k) \circ v.
$$

But $I_E$ is one of the fixed points; whence $h \circ g \sqsubseteq I_E$ must follow.
    $\square$



#### AI: Human-English to AI-Lean

**[Theorem_6_16.lean](Theorem_6_16.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Theorem_6_16.lean`](
    DomainTheory/NeighbourhoodSystems/DomainEquations/Theorem_6_16.lean)

### Lecture VI exercises

#### Human-English

#### EXERCISES
```

```
### Exercise 6.17

#### Human-English

**EXERCISE 6.17.** What are the algebras for which $C$ is initial? If $A$ of 6.2 is a
    generalization of $B$, what is the corresponding generalization of $C$? Prove that
    it exists and explain what are the algebras involved.

#### AI: Human-English to AI-Lean

**[Exercise_6_17.lean](Exercise_6_17.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_17.lean
    `](DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_17.lean)

### Exercise 6.18

#### Human-English

**EXERCISE 6.18.** With reference back to Exercise 3.16 discuss the construction of $\
    mathcal{D}^\infty$ as an initial algebra and as a solution to the domain equation

$$
\mathcal{D}^\infty \cong \mathcal{D} \times \mathcal{D}^\infty .
$$

(I do not know whether all solutions must be of the form $\mathcal{D}^\infty \times E$
    .)

#### AI: Human-English to AI-Lean

**[Exercise_6_18.lean](Exercise_6_18.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_18.lean
    `](DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_18.lean)

### Exercise 6.19

#### Human-English

**EXERCISE 6.19.** For the sake of uniformity restrict attention to systems $\mathcal{
    D}$ on sets $\Delta \subseteq \{0,1\}^*$, where $\Lambda \in \Delta$ and $\emptyset
     \notin \mathcal{D}$, and to the category of strict maps. Define sum and product by
    :

$$
\mathcal{D}_0 + \mathcal{D}_1 = \{\{\Lambda\} \cup 0\Delta_0 \cup 1\Delta_1\} \cup \{0
    X \mid X \in \mathcal{D}_0\} \cup \{1Y \mid Y \in \mathcal{D}_1\},
$$

$$
\mathcal{D}_0 \times \mathcal{D}_1 = \{\{\Lambda\} \cup 0X \cup 1Y \mid X \in \mathcal
    {D}_0 \text{ and } Y \in \mathcal{D}_1\}.
$$
```

```
Are these correct up to isomorphism? Now generate all constructs $T(X)$ formed by the
    constants (that is, $T(X) = \mathcal{D}$ for a fixed $\mathcal{D}$), by the
    identity ($T(X) = X$), and by sums and products ($T_0(X) + T_1(X)$, etc.). Show
    that these are all functors, continuous on maps, and monotone and continuous on
    domains.

#### AI: Human-English to AI-Lean

**[Exercise_6_19.lean](Exercise_6_19.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_19.lean
    `](DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_19.lean)

### Exercise 6.20

#### Human-English

**EXERCISE 6.20.** For any system $\mathcal{D}$ let $\mathrm{tok}(\mathcal{D})$ be the
     underlying set of tokens, so that $\mathcal{D}$ is a system over $\mathrm{tok}(\
    mathcal{D})$. For the category of Exercise 6.19 show that the function

$$
\lambda \Gamma.\, \mathrm{tok}(T(\{\Gamma\}))
$$

is continuous on the domain $\{\Gamma \subseteq \{0,1\}^* \mid \Lambda \in \Gamma\}$,
    where $T$ is any of the functors generated in 6.19. Conclude that there must exist
    a set

$$
\Gamma = \mathrm{tok}(T(\{\Gamma\})),
$$

so that $\{\Gamma\} \triangleleft T(\{\Gamma\})$, and so 6.14 applies.



#### AI: Human-English to AI-Lean

**[Exercise_6_20.lean](Exercise_6_20.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_20.lean
    `](DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_20.lean)

### Exercise 6.21

#### Human-English

**EXERCISE 6.21.** Do the same as 6.19 and 6.20 when the functors are also allowed to
    be generated by the operations:

$$
D_0 \oplus D_1 = \{\{\Lambda\} \cup 0\Delta_0 \cup 1\Delta_1\} \cup \{0X \mid X \in
    D_0 \setminus \{\Delta_0\}\} \cup \{1Y \mid Y \in D_1 \setminus \{\Delta_1\}\},
$$
```

```
$$
D_0 \otimes D_1 = \{\{\Lambda\} \cup 0\Delta_0 \cup 1\Delta_1\} \cup \{\{\Lambda\} \
    cup 0X \cup 1Y \mid X \in D_0 \setminus \{\Delta_0\} \text{ and } Y \in D_1 \
    setminus \{\Delta_1\}\}.
$$

Generalize all of $+$, $\times$, $\oplus$, $\otimes$ to combinations of several terms,
     not just the binary sums and products.

#### AI: Human-English to AI-Lean

**[Exercise_6_21.lean](Exercise_6_21.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_21.lean
    `](DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_21.lean)

### Exercise 6.22

#### Human-English

**EXERCISE 6.22.** Comment on these domain equations:

$$
N \cong \{\{0\}, \{0, \Lambda\}\} \oplus N,
$$

$$
M \cong \{\{\Lambda\}\} + M,
$$

$$
N^* \cong N \oplus (N \otimes N^*).
$$

#### AI: Human-English to AI-Lean

**[Exercise_6_22.lean](Exercise_6_22.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_22.lean
    `](DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_22.lean)

### Exercise 6.23

#### Human-English

**EXERCISE 6.23.** Construe the initial solution to

$$
\mathit{Exp} \cong N \oplus ((\mathit{Exp} \times \mathit{Exp}) + (\mathit{Exp} \times
     \mathit{Exp}))
$$

as a ?syntactical domain? of expressions generated from infinitely many ?variables? by
     means of two binary ?operation symbols?. Given an algebra $D$ with two operations

$$
```

```
u : D \times D \to D \quad \text{and} \quad v : D \times D \to D,
$$

show how any strict map $s : N \to D$ determines a unique map

$$
\mathit{val}(s) : \mathit{Exp} \to D
$$

that can be regarded as the ?evaluation of an expression?.

#### AI: Human-English to AI-Lean

**[Exercise_6_23.lean](Exercise_6_23.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_23.lean
    `](DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_23.lean)

### Exercise 6.24

#### Human-English

**EXERCISE 6.24.** Show that there must exist domains satisfying:

$$
D \cong D + (D \times E), \quad \text{and}
$$

$$
E \cong D + E,
$$

by using a double fixed-point method. First decide what the underlying set of tokens
    should be, and then define $D$ and $E$ by simultaneous fixed points. (Syntactical
    domains as in 6.23 may very well require several simultaneous equations.)



#### AI: Human-English to AI-Lean

**[Exercise_6_24.lean](Exercise_6_24.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_24.lean
    `](DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_24.lean)

### Exercise 6.25

#### Human-English

**EXERCISE 6.25.** For a projection pair $g : \mathcal{D} \to \mathcal{E}$ and $h : \
    mathcal{E} \to \mathcal{D}$ show that for $x \in |\mathcal{D}|$ and $y \in |\
    mathcal{E}|$ we have:

$$g(x) \sqsubseteq y \text{ iff } x \sqsubseteq h(y).$$

Thus, conclude that:
```

```
$$h(y) = \bigsqcup \{x \in |\mathcal{D}| \mid g(x) \sqsubseteq y\}, \quad \text{and}$$

$$g(x) = \bigsqcap \{y \in |\mathcal{E}| \mid x \sqsubseteq h(y)\},$$

for all $x \in |\mathcal{D}|$ and $y \in |\mathcal{E}|$. So each of the functions
    determines the other. In the first equation check that the set on the right is
    directed, and in the second equation that the set on the right is non empty. Prove
    also that $g$ maps consistent sets to consistent sets and preserves $\bigsqcup$ (
    not just directed unions).

#### AI: Human-English to AI-Lean

**[Exercise_6_25.lean](Exercise_6_25.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_25.lean
    `](DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_25.lean)

### Exercise 6.26

#### Human-English

**EXERCISE 6.26.** For systems $\mathcal{D}$ as in 6.19 define

$$\mathcal{D}_\perp = \{ \{\Lambda\} \cup 0\Delta \} \cup \{ 0X \mid X \in \mathcal{D}
     \}.$$

Describe the construct in terms of elements. Is this a suitable functor? Prove that

$$\mathcal{D}_\perp \oplus \mathcal{E}_\perp \cong \mathcal{D} + \mathcal{E}.$$

What is

$$\mathcal{D}_\perp \otimes \mathcal{E}_\perp \cong \ ??$$

#### AI: Human-English to AI-Lean

**[Exercise_6_26.lean](Exercise_6_26.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_26.lean
    `](DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_26.lean)

### Exercise 6.27

#### Human-English

**EXERCISE 6.27.** Which of the following relationships are true:

$$(\mathcal{D} \otimes \mathcal{E}) \trianglelefteq (\mathcal{D} \times \mathcal{E}) \
     ; \quad \mathcal{D} \trianglelefteq \mathcal{D} \times \mathcal{E} \ ;$$

$$(\mathcal{D} \oplus \mathcal{E}) \trianglelefteq (\mathcal{D} + \mathcal{E}) \ ; \
    quad \mathcal{D} \trianglelefteq \mathcal{D} \oplus \mathcal{E} \ ;$$

$$(\mathcal{D} \to_\perp \mathcal{E}) \trianglelefteq (\mathcal{D} \to \mathcal{E}) \
    ; \quad \mathcal{D} \trianglelefteq \mathcal{D} \otimes \mathcal{E} \ ?$$
```

```
#### AI: Human-English to AI-Lean

**[Exercise_6_27.lean](Exercise_6_27.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_27.lean
    `](DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_27.lean)

### Exercise 6.28

#### Human-English

**EXERCISE 6.28.** (Suggested by G. Plotkin). Show that if $\mathcal{D}$ and $\mathcal
    {E}$ are *finite* systems and

$$\mathcal{D} \trianglelefteq \mathcal{E} \trianglelefteq \mathcal{D} \ ,$$

then $\mathcal{D} \cong \mathcal{E}$. Need the same be true of infinite systems?



#### AI: Human-English to AI-Lean

**[Exercise_6_28.lean](Exercise_6_28.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_28.lean
    `](DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_28.lean)

### Exercise 6.29

#### Human-English

**EXERCISE 6.29.** Generalize $+$ and $\times$ to infinitary operations on domains:

$$\sum_{n=0}^{\infty} D_n \quad \text{and} \quad \prod_{n=0}^{\infty} D_n.$$

Would a similar generalization be possible for $\oplus$ and $\otimes$?



#### AI: Human-English to AI-Lean

**[Exercise_6_29.lean](Exercise_6_29.lean)**

*Lean source:* [`DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_29.lean
    `](DomainTheory/NeighbourhoodSystems/DomainEquations/Exercise_6_29.lean)

### Computability in effectively given domains

**Dependency diagram.** Each box is one item. The arrowhead is on the item that
    imports. An arrow already implied by a longer path is left out. The introduction
    has no Lean file, so it is not shown. Blue is a definition, green a proposition,
    amber an example, red a theorem, and indigo an exercise.

```mermaid
%% Each box is one item. The arrowhead is on the item that imports.
```
```

```
%% An arrow already implied by a longer path is omitted.
%% The introduction has no Lean file, so it is not shown.
%%{init: {"flowchart": {"wrappingWidth": 2000}}}%%
flowchart TB

  Definition_7_1["Def 7.1<br>computable presentation"]
  Definition_7_2["Def 7.2<br>computable mapping"]
  Proposition_7_3["Prop 7.3<br>computable map category"]
  Theorem_7_4["Theorem 7.4<br>sum and product"]
  Theorem_7_5["Theorem 7.5<br>function space"]
  Theorem_7_6["Theorem 7.6<br>computable fix"]
  Proposition_7_7["Prop 7.7<br>lists given"]
  Example_7_8["Example 7.8<br>powerset given"]
  Definition_7_9["Def 7.9<br>power domain"]
  Proposition_7_10["Prop 7.10<br>power domain effective"]
  Definition_7_11["Def 7.11<br>finite element sets"]
  Proposition_7_12["Prop 7.12<br>finite sets approximable"]
  Exercise_7_13["Exercise 7.13<br>neighbourhood axioms"]
  Exercise_7_14["Exercise 7.14<br>primitive recursive"]
  Exercise_7_15["Exercise 7.15<br>more constructs"]
  Exercise_7_16["Exercise 7.16<br>curry enumeration"]
  Exercise_7_17["Exercise 7.17<br>recursion on lists"]
  Exercise_7_18["Exercise 7.18<br>effective isomorphism"]
  Exercise_7_19["Exercise 7.19<br>power domain functor"]
  Exercise_7_20["Exercise 7.20<br>power domain union"]
  Exercise_7_21["Exercise 7.21<br>distributing power"]
  Exercise_7_22["Exercise 7.22<br>formal languages"]
  Exercise_7_23["Exercise 7.23<br>graph and fun"]
  Exercise_7_24["Exercise 7.24<br>LUCID histories"]

  Definition_7_1 --> Definition_7_2
  Definition_7_1 --> Example_7_8
  Definition_7_1 --> Exercise_7_13
  Definition_7_11 --> Exercise_7_19
  Definition_7_2 --> Exercise_7_14
  Definition_7_2 --> Proposition_7_3
  Definition_7_9 --> Exercise_7_14
  Example_7_8 --> Exercise_7_23
  Exercise_7_14 --> Proposition_7_10
  Exercise_7_15 --> Theorem_7_6
  Exercise_7_18 --> Exercise_7_17
  Exercise_7_18 --> Theorem_7_6
  Exercise_7_19 --> Exercise_7_20
  Exercise_7_19 --> Exercise_7_21
  Exercise_7_21 --> Proposition_7_7
  Exercise_7_22 --> Definition_7_1
  Exercise_7_24 --> Theorem_7_6
  Proposition_7_10 --> Definition_7_11
  Proposition_7_12 --> Theorem_7_5
  Proposition_7_3 --> Theorem_7_4
  Proposition_7_7 --> Theorem_7_4
  Theorem_7_4 --> Exercise_7_15
  Theorem_7_4 --> Exercise_7_18
  Theorem_7_4 --> Proposition_7_12
  Theorem_7_5 --> Exercise_7_16
  Theorem_7_5 --> Exercise_7_23
```

```
Theorem_7_5 --> Exercise_7_24

classDef cdef fill:#dbeafe,stroke:#1d4ed8,color:#1e3a8a
classDef cprop fill:#dcfce7,stroke:#15803d,color:#14532d
classDef cexs fill:#fef3c7,stroke:#b45309,color:#78350f
classDef cex fill:#e0e7ff,stroke:#4338ca,color:#312e81
classDef cthm fill:#fee2e2,stroke:#b91c1c,color:#7f1d1d

class Definition_7_1 cdef
class Definition_7_2 cdef
class Proposition_7_3 cprop
class Theorem_7_4 cthm
class Theorem_7_5 cthm
class Theorem_7_6 cthm
class Proposition_7_7 cprop
class Example_7_8 cexs
class Definition_7_9 cdef
class Proposition_7_10 cprop
class Definition_7_11 cdef
class Proposition_7_12 cprop
class Exercise_7_13 cex
class Exercise_7_14 cex
class Exercise_7_15 cex
class Exercise_7_16 cex
class Exercise_7_17 cex
class Exercise_7_18 cex
class Exercise_7_19 cex
class Exercise_7_20 cex
class Exercise_7_21 cex
class Exercise_7_22 cex
class Exercise_7_23 cex
class Exercise_7_24 cex
```

3.151 Introduction

3.151.1 Human-English

3.152 LECTURE VII

COMPUTABILITY IN EFFECTIVELY GIVEN DOMAINS

For the domain N the strict functions from N into N, the strict maps $f : N \to N$, correspond exactly to the partial functions $g : N \to N$ (as we wrote in 5.6 we had $f = \bar{g}$). For such functions there is a standard theory of computability: g is called computable if it can be defined as a partial recursive function with its "program" written down in a certain standard form. The non-strict maps $h : N \to N$ are all constant, and so are intuitively computable; so we know all about computable maps in $|N \to N|$ in general. The question is: what are the computable maps on (elements of) other domains?

The answer will of course depend on how the domain is presented to us. Even with N, there are continuum many isomorphisms $\pi : N \to N$ of N onto itself, not all of which can be computable. That is, if we permute N and, so to speak, present the integers in a different order, then a well-behaved computable function $f : N \to N$ may well be transformed into a non-computable function,

$$\pi \circ f \circ \pi^{-1} : N \to N.$$

(Hint: Consider the characteristic function e of the even numbers. Take $f = \bar{e}$ and let π be very horrid.) The reason we imagined we knew which were the computable $f : N \to N$ is that N is always thought of in a standard presentation. We must thus define "in general" a concept of an *effectively given domain*, that is to say, one with a sufficiently computable presentation to represent the additional knowledge about the domain.

The main idea will be that the *finite elements* of $|D|$ should be regarded as the ones initially known. Abstractly, to know a finite element is to know how it is *related* to other finite elements.

Of course, this will mean that we will allow at most a countable infinity of finite elements — but this restriction well accords with intuition. To make precise the terminology "related to" it proves most convenient to go back to the neighbourhoods (in any case they are in a one-one correspondence with the finite elements).

3.153 Definition 7.1

3.153.1 Human-English

DEFINITION 7.1. A neighbourhood system D has a *computable presentation* provided we can write

$$D = \{X_n \mid n \in N\},$$

where the following two relations

(i) $X_n \cap X_m = X_k$; and

(ii) $\exists k \in N.\, X_k \subseteq X_n$ and $X_k \subseteq X_m$

are recursively decidable (in integer indices n, m, k and in n, m, respectively). □

More strictly the sequence,

$$\langle X_n \rangle_{n=0}^{\infty},$$

is the presentation. Even more strictly, when it is required to cope with infinitely many domains at a time, it would be necessary to give the actual Gödel numbers of the recursive relations (i) and (ii) (rather than just saying there exists some way of showing them to be recursively decidable).

The intuitive idea of 7.1 is that the system is effectively given if you know how to do elementary "calculations" with neighbourhoods. The basic calculations are the forming of intersections. The neighbourhoods have to be laid out in a systematic way; and, if we are asked for an intersection of two given neighbourhoods, we have to be able to locate it in the standard sequence. Relation (ii) is the *consistency condition* , which is the necessary and sufficient condition for the intersection to exist in D. When (ii) is true, therefore, we have only to try $k = 0, 1, 2, \ldots$ until we discover that we have found the intersection. We are

assuming that these basic decisions can be carried out in "finite time". Note that the obvious biconditional,

$$X_n \subseteq X_m \text{ iff } X_n \cap X_m = X_n,$$

assures us that the inclusion relation between neighbourhoods is itself decidable in terms of the indices. So in (ii) if k exists, *then* it (or the first one) can indeed be found in finite time. The rub is that if it *does not exist*, no finite number of inclusion checks will determine that fact. That is why we have to *assume*

that (ii) is always decidable. The information contained in (ii) is a fundamental part of the neighbourhood structure. (An axiomatic characterization of neighbourhood structures is given in Exercise 7.13, which may make clearer what we are assuming and what a presentation is.)

3.153.2 AI: Human-English to AI-Lean

Definition_7_1.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_1.lean

3.154 Definition 7.2

3.154.1 Human-English

DEFINITION 7.2. Given two recursively presented domains,

$$\mathcal{D} = \{X_n \mid n \in \mathbf{N}\} \text{ and } E = \{Y_m \mid m \in \mathbf{N}\},$$

an approximable mapping $f : \mathcal{D} \to E$ is said to be *computable* iff the relation

$$X_n f Y_m$$

is recursively enumerable in n and m. □

The question to ask first is why "recursively enumerable" rather than "recursive" (= "recursively decidable")? The answer will become clear when we let $\mathcal{D}$ degenerate to the one-element domain, $\mathcal{D} = \{\Delta\}$. Then what we are considering is merely a single element

$$y = f(\{\Delta\}) \in |E|.$$

Therefore, 7.2 incorporates the notion of a *computable element* of a domain. And the condition reduces to the statement that the filter $y \in |E|$ is such that the set

$$\{m \in \mathbf{N} \mid Y_m \in y\}$$

is a recursively enumerable set of integers. The point is that the elements of $|E|$ are finite or infinite. If y were finite, the set of indices above would indeed be recursive in view of

our assumptions on E. But an infinite element can in general only be approximated "a little at a time". We cannot expect to know the whole story of its approximations in a flash. What it means to be recursively enumerable is that there is a primitive recursive function (hence, a total function), $r : \mathbf{N} \to \mathbf{N}$, such that

$$y = \{Y_{r(i)} \mid i \in \mathbf{N}\}.$$

That is to say, *all* the approximations to y can eventually be listed. In the case of the mapping f we could write

$$f = \{(X_{s(i)}, Y_{r(i)}) \mid i \in \mathbf{N}\},$$

for a suitable pair of primitive recursive functions s and r.

Definitions 7.1 and 7.2 may very well irritate the person hearing them for the first time: instead of explaining computability in direct terms, the whole question is thrown into the lap of recursion theory!

There are several answers. "You have to start somewhere" is one thing I always say. Recursion on the integers is a well-understood theory, and we shall not need the refined parts of the development, fortunately. In any case, our definitions apply to *many* domains of quite different structure, not just to the domain $\mathbf{N}$. And the next step we shall take is to show how to build up computable functions (and also effectively given domains) from simpler ones. Thus, often it will not be necessary to go back to the seemingly over-precise definitions involving the indices but to appeal to some broad general principles.

3.154.2 AI: Human-English to AI-Lean

Definition_7_2.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_2.lean

3.155 Proposition 7.3

3.155.1 Human-English

PROPOSITION 7.3. The identity map on an effectively given domain is computable; the composition of computable mappings on effectively given domains is again computable. □

The proofs for 7.3 are so trivial they are hardly worth an exercise. Note the immediate and useful consequence: if $f : D \to E$ is computable and $x \in |D|$ is computable, then $f(x) \in |E|$ is also computable. The next result is, however, worth working out even though it is quite easy.

3.155.2 AI: Human-English to AI-Lean

Proposition_7_3.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_3.lean

3.156 Theorem 7.4

3.156.1 Human-English

THEOREM 7.4. If $\mathcal{D}_0$ and $\mathcal{D}_1$ are effectively given, then so are $(\mathcal{D}_0 + \mathcal{D}_1)$ and $(\mathcal{D}_0 \times \mathcal{D}_1)$.

Moreover the combinators in_i and out_i and proj_i^2 are all computable; further, if f and g are computable maps, then so are $f + g$ and $f \times g$.

Proof: Let the computable presentations be given as:

$$\mathcal{D}_i = \{X_n^i \mid n \in \mathbf{N}\}.$$

We can assume that the sets of tokens Δ_0 and Δ_1 are disjoint and $\emptyset \notin \mathcal{D}_i$. Then the construction of the sum is just

$$\mathcal{D}_0 + \mathcal{D}_1 = \{\Delta_0 \cup \Delta_1\} \cup \mathcal{D}_0 \cup \mathcal{D}_1.$$

As an enumeration we define for $n \in \mathbf{N}$:

$$Z_0 = \Delta_0 \cup \Delta_1 \; ; \; Z_{2n+1} = X_n^0 \; ; \; Z_{2n+2} = X_n^1 \; .$$

We leave as an exercise the check of 7.1(i)–(ii).

For the product we want:

$$\mathcal{D}_0 \times \mathcal{D}_1 = \{X^0_n \cup X^1_m \mid n, m \in \mathbf{N}\}.$$

What we then need are recursive functions $p : \mathbf{N} \to \mathbf{N}$, $q : \mathbf{N} \to \mathbf{N}$, and $r : \mathbf{N} \times \mathbf{N} \to \mathbf{N}$ where for $m, n, k \in \mathbf{N}$ we have:

$$p(r(n, m)) = n \text{ and } q(r(n, m)) = m, \text{ and } r(p(k), q(k)) = k.$$

Thus r is a "one-one pairing function"; there are many ways to find such functions (see Exercise 5.13). We can then define for $k \in \mathbf{N}$:

$$W_k = X^0_{p(k)} \cup X^1_{q(k)} \, .$$

Again we leave as an exercise the check that this provides a computable presentation of $\mathcal{D}_0 \times \mathcal{D}_1$.

As for the combinators, the neighbourhood relations have to be worked out in terms of the indices. For example

$$X^0_n \text{ in}_0 \, Z_m \text{ iff either } m = 0 \text{ or for some } k$$

$$m = 2k + 1 \text{ and } X^0_n \subseteq X^0_k \, .$$

and

$$W_k \, \text{proj}^2_1 \, X^1_m \text{ iff } X^1_{q(k)} \subseteq X^1_m \, .$$

The reader needs to check that these are recursively enumerable

Relations in the indices. For this purpose it may be convenient to recall some closure properties of these relations: taking conjunctions, disjunctions, substituting recursive functions, applying an existential quantifier to the front. □

Products give us a way of providing an immediate meaning to the notion of a computable function of several variables. Note that the proof of 3.7 is "effective" and shows that substitution of computable functions of several variables into each other always gives computable functions. We turn next to the function spaces.

3.156.2 AI: Human-English to AI-Lean

Theorem_7_4.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_4.lean

3.157 Theorem 7.5

3.157.1 Human-English

THEOREM 7.5. If $\mathcal{D}_0$ and $\mathcal{D}_1$ are effectively given, then so is $(\mathcal{D}_0 \to \mathcal{D}_1)$. The combinators eval and curry are computable, provided all the domains involved are effectively given. The computable elements $f \in |\mathcal{D}_0 \to \mathcal{D}_1|$ are exactly the computable maps $f : \mathcal{D}_0 \to \mathcal{D}_1$.

Proof: The proofs of 3.9, 3.11, and 3.12 were set up with this theorem in mind. If

$$\mathcal{D}_0 = \{X_n \mid n \in \mathbf{N}\} \quad \text{and} \quad \mathcal{D}_1 = \{Y_m \mid m \in \mathbf{N}\}$$

are two effectively given neighbourhood systems, then the neighbourhoods of $(\mathcal{D}_0 \to \mathcal{D}_1)$, by Definition 3.8, are non-empty intersections like

$$\bigcap_{i<q} [X_{n_i}, Y_{m_i}],$$

where $\langle n_0, n_1, \ldots, n_{q-1}\rangle$ and $\langle m_0, m_1, \ldots, m_{q-1}\rangle$ are two finite sequences of integers determining the choice of the function-space neighbourhood. In 3.9(i) the test for nonemptiness is given. Assuming the decidability of relations in $\mathcal{D}_0$ and $\mathcal{D}_1$, one remarks that the consistency of *finite sequences* of neighbourhoods is also decidable. (Hint: Test the first *two*, then form their intersection. Next test the third given neighbourhood against this one set; if consistent, form the intersection, and carry on.) By 3.9(i) at most $2 \cdot 2^q$ such sequential checks must be carried out to determine whether the function-space neighbourhood is non empty.

It may not be fun, but the checks can be carried out in finite time. Owing to this decidability, we can therefore enumerate in a systematic way *all* the pairs of finite sequences $\langle n_0, \ldots\rangle$ and $\langle m_0, \ldots\rangle$ that determine neighbourhoods: that is the way that $(\mathcal{D}_0 \to \mathcal{D}_1)$ obtains its enumeration.

Concerning the decidability of the required relations on $(\mathcal{D}_0 \to \mathcal{D}_1)$, we remark first off that consistency is more of the same: to test two finite intersections against each other, just form one big intersection and test it for non-emptiness as before. Secondly, the testing for intersection comes down in the end to testing one typical intersection of $[X, Y]$-neighbourhoods for equality with another. But equality amounts to two inclusions; inclusion in an intersection amounts to inclusion in each term. Therefore, what we need to do is to check a finite number of statements of the form:

$$\bigcap_{i<q} [X_{n_i}, Y_{m_i}] \subseteq [X_k, Y_\ell].$$

As we pointed out after the proof of 3.9, this inclusion is equivalent to

$$\bigcap \{Y_{m_i} \mid X_k \subseteq X_{n_i}\} \subseteq Y_\ell.$$

By decidability in $\mathcal{D}_0$, we can effectively find the n_i that are needed. Then in $\mathcal{D}_1$, we form the intersection of the corresponding Y_{m_i}. Finally, we check the inclusion. Again, one check in $(\mathcal{D}_0 \to \mathcal{D}_1)$ requires a whole sequence of checks in $\mathcal{D}_0$ and in $\mathcal{D}_1$, but the process is finite. So we have argued that $(\mathcal{D}_0 \to \mathcal{D}_1)$ is effectively given.

In showing that the combinators are computable, we refer first to the proof of 3.11. The typical pair of neighbourhoods possibly belonging to eval is

$$\bigcap_{i<q} [X_{n_i}, Y_{m_i}],\ X_k \text{ eval } Y_\ell.$$

As we needed not to be so specific, we expressed the holding of this relationship in terms of *all* the functions in the function-

space neighbourhood. But we know that the neighbourhood, by 3.9(ii), has a minimal element; it is then sufficient to test for the holding of $X_k f_0 Y_\ell$ at this minimal function f_0. But this test, we have already seen, is decidable. So the pairs in eval actually form a recursive set, not just a recursively enumerable set; thus, eval is a computable function.

The case of curry involves three domains and is a bit more messy. But again, if the required neighbourhoods are written out in full, it will be seen that curry, too, is computable. We leave this minor struggle to the exercises.

The final statement is an easy consequence of the fundamental connection between approximable $f : \mathcal{D}_0 \to \mathcal{D}_1$ as relations and as elements. Recall, as in the proof of 3.10, that we have

$$f \in [X, Y] \text{ iff } XfY,$$

for all $X \in \mathcal{D}_0$ and $Y \in \mathcal{D}_1$. Therefore,

$$f \in \bigcap_{i<q} [X_{n_i}, Y_{m_i}] \text{ iff } \forall i < q.\, X_{n_i} f Y_{m_i}.$$

It follows that if f is recursively enumerable as a set of pairs, then, by forming all the non-empty intersections (as shown), we get an enumeration of all the neighbourhoods to which f belongs; and this is the same as the filter corresponding to f as an element of the function space. The converse direction is clear. □

We have nearly all our favourite combinators computable, but perhaps the most important one - since it is the key to recursive definitions - is the fixed-point combinator. It is not left out.

3.157.2 AI: Human-English to AI-Lean

Theorem_7_5.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_5.lean

3.158 Theorem 7.6

3.158.1 Human-English

THEOREM 7.6. For any effectively given domain $\mathcal{D}$, the combinator fix : $(\mathcal{D} \to \mathcal{D}) \to \mathcal{D}$ is computable.

Proof : Referring back to the proof of Theorem 4.2 and thinking of

$$\mathcal{D} = \{X_n \mid n \in \mathbb{N}\}$$

as effectively given, fix as a relation comes down to

$$\bigcap_{i<q} [X_{n_i}, X_{m_i}] \text{ fix } X_\ell \text{ iff for some finite sequence}$$

$$\Delta = X_{k_0}, \ldots, X_{k_p} = X_\ell,$$

we have, for each $j < p$,

$$\bigcap \{X_{m_i} \mid X_{k_j} \subseteq X_{n_i}\} \subseteq X_{k_{j+1}}.$$

Inside the "for some finite sequence" all the checks are decidable by assumption on D. But the existential quantification of a decidable predicate always gives a recursively enumerable predicate. (And, as there is no implied bound on the size of the finite sequence we are looking for, this really *is* an enumerable set and not generally a recursive set.) □

The major consequence of what we have done up to this point concerns typed λ-calculus. Any expression involving only *effectively given types* and, perhaps, some *basic computable constants* using only the $\lambda, !$-notation defines a computable function of its free variables. And such functions applied to computable arguments give computable values. And such functions have computable least fixed points. Etc., etc. In a definite sense then we have in the "metalanguage", as people say, a quite precise and fully *mathematical programming language* for defining computable operators. It is not a machine implemented language, but it is a mathematically well-defined and easy-to-use language. And when we combine the usual type-definition facility together with *domain equations*, we have an especially powerful language.

3.158.2 AI: Human-English to AI-Lean

Theorem_7_6.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_6.lean

3.159 Proposition 7.7

3.159.1 Human-English

PROPOSITION 7.7. For any effectively given domain D, the domain $D^{\S}$ is also effectively given, and all the combinators of Example 6.1 prove to be computable.

Proof: This proof is essentially an exercise, but it is useful to have an easy-to-grasp example. Indeed, to make things easy to reason about, we can assume that D is a system over $\Delta = \mathbf{N}$, and that in the presentation where

$$D = \{X_n \mid n \in \mathbf{N}\},$$

the relation $k \in X_n$ is *recursive* in k and n. (It is worth thinking why this is so.) Of course, a lot of other things are recursive also.

Now what kind of a system is $D^{\S}$? The construction of 6.1 made it a system over a certain set of strings Γ. For the sake of checking various assertions about computability, we are transposing everything back to $\mathbf{N}$. (These are all denumerable sets in any case.) The set Γ is divided into three equally big parts, and we can do the same for $\mathbf{N}$. Let us write for any $m, k \in \mathbf{N}$ and subset $X \subseteq \mathbf{N}$:

$$mX + k = \{m \cdot n + k \mid n \in X\}.$$

Then by splitting the integers modulo 3 we have:

$$\mathbf{N} = 3\mathbf{N} \cup (3\mathbf{N} + 1) \cup (3\mathbf{N} + 2),$$

and this equation is quite analogous to that for Γ. We then propose this definition for $D^{\S}$:

$$D^{\S} = \{\mathbf{N}\} \cup \{3X \mid X \in D\} \cup \{(3X + 1) \cup (3Y + 2) \mid X, Y \in D^{\S}\},$$

but this does not make the enumeration of $D^{\S}$ all that obvious. This is one way to do it:

$$V_0 = \mathbf{N}\ ;\ V_{2n+1} = 3X_n\ ;\ V_{2n+2} = (3V_{p(n)} + 1) \cup (3V_{q(n)} + 2).$$

Here p and q are the inverse of the pairing functions mentioned in 7.4. They must be chosen so that $p(n) < n$ and $q(n) < n$ for all $n \in \mathbf{N}$. Thus, in calculating V_k where $k = 2n + 2$ we will be using $V_{p(n)}$ and $V_{q(n)}$ where both subscripts are strictly less than k. This observation is required so that $m \in V_k$ is going to be a recursive relation. What we claim is that

$$D^{\S} = \{V_k \mid k \in \mathbf{N}\}.$$

It should be clear that everything on the right belongs to $D^{\S}$. What needs an inductive argument is that everything in $D^{\S}$ is eventually of the form V_k. But this should be fairly obvious owing to the properties of $r : \mathbf{N} \times \mathbf{N} \leftrightarrow \mathbf{N}$.

The reader also has to check that 7.1(i)–(ii) hold for the V_k. The idea is that any such check is either (1) trivial, or (2) something already assumed about D and the X_n, or (3) can be thrown back to some sets V_m with strictly smaller subscripts. Therefore, the checks will give an answer in finite time according to an effective reduction.

Next for the combinators, we have to translate neighbourhood relations into relations among integer indices. A selection of examples must suffice,

$$X_n\ (\lambda x.\, x^{\S})\ V_k \text{ iff } V_{2n+1} \subseteq V_k$$

$$V_m\ \mathrm{proj}_0\ V_k \text{ iff } k = 0 \text{ or } \exists n \in \mathbf{N}.\, m = 2n + 2 \text{ and } V_{p(n)} \subseteq V_k.$$

The reader should write out other cases. □

3.159.2 AI: Human-English to AI-Lean

Proposition_7_7.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_7.lean

3.160 Example 7.8

3.160.1 Human-English

EXAMPLE 7.8. We have often made reference to the powerset $P\mathbf{N}$ as a domain and we should check here that it is effectively given. One easy way to see this is to note

$$P\mathbf{N} \cong |T^{\infty}|.$$

The (slight) trouble with $P\mathbf{N}$ is that we usually think of it in terms of *elements* rather than *neighbourhoods*. Going back to Exercise 1.16, we can argue that the neighbourhoods of $P\mathbf{N}$ are ordered not like the finite sets of integers but in the partial ordering *converse* to that. But this is of no trouble, since all will be decidable. What we need first is an enumeration of all finite sets of integers. We can do this by:

$$E_n = \{k \mid \exists i, j.\, i < 2^k \text{ and } n = i + 2^k + j \cdot 2^{k+1}\}.$$

The idea is that $k \in E_n$ means that the exponent k does occur in the binary expansion of n as a sum of powers of 2. All finite subsets of $\mathbf{N}$ are of the form E_n. We then find that as a neighbourhood system

$$(P\mathbf{N}) = \{\mathbf{N} \setminus E_n \mid n \in \mathbf{N}\}.$$

As the relationship $E_n \cup E_m = E_k$ is recursive, there is no trouble in proving that this is a computable presentation. In this system, of course, any two neighbourhoods are consistent. Various combinators on $P\mathbf{N}$ are suggested in Exercise 7.23. □

We end this chapter with an example of another kind of domain construct. This construct is known as the *Smyth Power Domain*. It is defined for any neighbourhood system $\mathcal{D}$ and results in a new system we shall call here $\mathbb{P}\mathcal{D}$. The elements of $\mathbb{P}\mathcal{D}$ behave rather like *sets of elements* of $\mathcal{D}$, but since our elements can be either partial or total, there are certain dangers to pushing the analogy too far. For some purposes a rival construct called the *Plotkin Power Domain* is better, but it leads outside the category of neighbourhood systems as defined in these lectures. Do not confuse $P\mathbf{N}$ with $\mathbb{P}\mathcal{D}$.

3.160.2 AI: Human-English to AI-Lean

Example_7_8.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain
7_8.lean

3.161 Definition 7.9

3.161.1 Human-English

DEFINITION 7.9. Let $\mathcal{D}$ be any neighbourhood system and define

$$\mathbb{P}\mathcal{D} = \left\{ \bigcup_{i<n} (\downarrow X_i) \mid \forall i < n.\, X_i \in \mathcal{D} \right\}.$$

We recall that for any $X \in \mathcal{D}$

$$\downarrow X = \{Y \in \mathcal{D} \mid Y \subseteq X\}.$$

The finite unions in $\mathbb{P}\mathcal{D}$ can be empty (i.e. if $n = 0$). □

Formally, the system $\mathbb{P}\mathcal{D}$ is just more or less the closure of $\mathcal{D}$ under finite unions; however, this would not be an isomorphism-invariant construct unless $\mathcal{D}$ is "prepared". The preparation consists of replacing $\mathcal{D}$ by the isomorphic domain

$$\mathcal{D}^\dagger = \{\downarrow X \mid X \in \mathcal{D}\}.$$

(In this connection refer back to Exercise 1.20.) We remark that

$$\downarrow X \cap \downarrow Y \neq \emptyset \text{ iff } \{X, Y\} \text{ is consistent in } \mathcal{D},$$

and in that case

$$\downarrow X \cap \downarrow Y = \downarrow (X \cap Y).$$

3.161.2 AI: Human-English to AI-Lean

Definition_7_9.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain
7_9.lean

3.162 Proposition 7.10

3.162.1 Human-English

PROPOSITION 7.10. The power domain $\mathbb{P}\mathcal{D}$ is a neighbourhood system if $\mathcal{D}$ is, and it is effectively given if $\mathcal{D}$ is.

Proof : The system $\mathcal{D}^\dagger$ is a neighbourhood system as we just remarked; indeed it is a positive neighbourhood system. It is easy to prove that the closure of any positive system under finite unions is a neighbourhood system, because the resulting family of sets is closed under *all* finite intersections. (If we left out the empty union, the result would be a positive system.) The proof is obvious since intersection of sets distributes over finite union. So $\mathbb{P}\mathcal{D}$ is a neighbourhood system.

For the second half of the proposition, we just have to constructivize the previous argument. Thus, if

$$\mathcal{D} = \{X_n \mid n \in \mathbb{N}\},$$

then the elements of $\mathbb{P}\mathcal{D}$ can be written as:

$$\bigcup_{i<q} (\downarrow X_{n_i}),$$

and hence are indexed by the finite sequences $\langle n_0, \ldots, n_{q-1}\rangle$ of integers. Now one of the standard devices of recursion theory is to put the finite sequences of integers into a recursive one-one correspondence with the integers themselves. This is the start of the recursive presentation of $\mathbb{P}\mathcal{D}$, since it means we can list effectively all the required neighbourhoods.

Next consider an intersection

$$\bigcup_{i<q} (\downarrow X_{n_i}) \cap \bigcup_{j<r} (\downarrow X_{m_j}) = \bigcup_{\substack{i<q \\ j<r}} \downarrow (X_{n_i} \cap X_{m_j})\,.$$

Some of the terms which are $\emptyset$ have to be thrown out — but this requires only a finite number of decisions all computable by assumption. Now we have to rewrite

$$X_{n_i} \cap X_{m_j} = X_{k_{ij}}\,,$$

but the finding of k_{ij} is also computable. *Finally*, we have to re-order the doubly indexed sequence into a singly indexed sequence of length $q \cdot r$, but this is easily seen to be computable also. Therefore, intersections can be "calculated".

It remains to be shown that equality between neighbourhoods in $\mathbb{P}\mathcal{D}$ is decidable. The question really comes down to deciding something like:

$$\downarrow X_k \subseteq \bigcup_{i<q} \downarrow X_{n_i}\,.$$

Now since $X_k \in\!\downarrow X_k$, we find that the above is just equivalent to:

$$\exists i < q.\, X_k \subseteq X_{n_i}\,.$$

By our assumptions on $\mathcal{D}$, this is decidable. (It is this part of the argument that required the passage to $\mathcal{D}^\dagger$. It does not seem to be generally true that the closure under finite unions of an effectively given system is again effectively given.) $\square$

One of the main reasons that $\mathbb{P}\mathcal{D}$ is like a power domain is the possibility of forming "finite sets".

3.162.2 AI: Human-English to AI-Lean

Proposition_7_10.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain7_10.lean

3.163 Definition 7.11

3.163.1 Human-English

DEFINITION 7.11. For elements $x_0, \ldots, x_{n-1} \in |D|$ we define

$$\{x_0, \ldots, x_{n-1}\} = \{z \in \mathbb{P}D \mid \exists X_0 \in x_0 \ldots \exists X_{n-1} \in x_{n-1}.\, \bigcup_{i<n} (\uparrow X_i) \subseteq z\}.$$

(Note, we could also write $\forall i < n.\, X_i \in z$.) $\square$

3.163.2 AI: Human-English to AI-Lean

Definition_7_11.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain7_11.lean

3.164 Proposition 7.12

3.164.1 Human-English

PROPOSITION 7.12. The mapping

$$\lambda x_0, \ldots, x_{n-1}.\, \{x_0, \ldots, x_{n-1}\} : D^n \to \mathbb{P}D$$

is approximable and is computable if D is effectively given. Moreover, the map $\lambda x.\, \{x\}$ shows that $D \trianglelefteq \mathbb{P}D$, and we also have the law:

$$\{x_0, \ldots, x_{n-1}\} = \{x_0\} \cap \cdots \cap \{x_{n-1}\}$$

as an intersection of filters.

Proof : The second part shows that everything reduces to $\lambda x.\, \{x\}$. We see that

$$X_k\ (\lambda x.\, \{x\})\ \bigcup_{i<q} (\uparrow X_{n_i}) \text{ iff } \exists i < q.\, X_k \sqsubseteq X_{n_i}.$$

Thus, $\lambda x.\,\{x\}$ is an approximable mapping and is computable in the effectively given case.
The proof of the law can be reduced to the special case

$$\{x\} \cap \{y\} = \{x, y\}$$

for the sake of illustration. In terms of finite elements of the two domains D and $\mathbb{P}D$ we find

$$\{\uparrow X\} = \uparrow\uparrow X,$$

and so,

$$\begin{aligned}\{\uparrow X\} \cap \{\uparrow Y\} &= \uparrow\uparrow X \cap \uparrow\uparrow Y \\ &= \uparrow (\uparrow X \cup \uparrow Y) \\ &= \{\uparrow X, \uparrow Y\}.\end{aligned}$$

An equation between approximable functions that checks for finite elements also holds for all elements.
Finally, we note that

$$D \cong D^{\dagger} \trianglelefteq \mathbb{P}D$$

and that the isomorphism involved is just $\lambda x.\,\{x\}$ by what we saw on the finite elements. □
Further combinators on the power domain are given in the exercises.

3.164.2 AI: Human-English to AI-Lean

Proposition_7_12.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_12.lean

3.165 Lecture VII exercises

3.165.1 Human-English

3.165.2 EXERCISES

3.166 Exercise 7.13

3.166.1 Human-English

EXERCISE 7.13. Show that an effectively given domain can always be identified with a relation $\mathrm{INCL}(n, m)$ on integers, where the two derived relations

$$\mathrm{CONS}(n, m) \text{ iff } \exists k.\, \mathrm{INCL}(k, n) \text{ and } \mathrm{INCL}(k, m);$$

$$\mathrm{MEET}(n, m, k) \text{ iff } \forall j\, [\mathrm{INCL}(j, k) \text{ iff } \mathrm{INCL}(j, n) \text{ and } \mathrm{INCL}(j, m)]$$

are both recursively decidable, and where the following axioms hold:

(i) $\forall n.\, \mathrm{INCL}(n, n)$;

(ii) $\forall n, m, k.\, \mathrm{INCL}(n, m)$ and $\mathrm{INCL}(m, k)$ imply $\mathrm{INCL}(n, k)$;

(iii) $\exists m\, \forall n.\, \mathrm{INCL}(n, m)$

(iv) $\forall n, m.\, \mathrm{CONS}(n, m)$ implies $\exists k.\, \mathrm{MEET}(n, m, k)$.

(Hint: Consider the neighbourhood system

$$\mathcal{D} = \big\{\{m \in \mathbf{N} \mid \mathrm{INCL}(m, n)\} \mid n \in \mathbf{N}\big\}.$$

Is this essentially any effectively given system?)

3.166.2 AI: Human-English to AI-Lean

Exercise_7_13.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_13.lean

3.167 Exercise 7.14

3.167.1 Human-English

EXERCISE 7.14. (For recursive-function theorists.) Prove the statements after definition 7.2 about the existence of primitive recursive functions for showing things recursively enumerable. (Recall that a non-empty set is r.e. iff it is the range of a primitive recursive function.) Show also that every computable element $y \in |E|$ can be written

$$y = \bigcup \{\uparrow Y_{t(i)} \mid i \in \mathbf{N}\},$$

where $t : \mathbf{N} \to \mathbf{N}$ is primitive recursive and where we may assume
$Y_{t(i+1)} \subseteq Y_{t(i)}$
for all $i \in \mathbf{N}$.

3.167.2 AI: Human-English to AI-Lean

Exercise_7_14.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_14.lean

3.168 Exercise 7.15

3.168.1 Human-English

EXERCISE 7.15. Finish the proof of 7.4 and establish similar results for the constructs $(D_0 \otimes D_1)$, $(D_0 \oplus D_1)$ and D^∞. Take into account the various appropriate combinators.

3.168.2 AI: Human-English to AI-Lean

Exercise_7_15.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_15.lean

3.169 Exercise 7.16

3.169.1 Human-English

EXERCISE 7.16. Let $D_0 = \{X_n \mid n \in \mathbf{N}\}$, $D_1 = \{Y_m \mid m \in \mathbf{N}\}$ and $D_2 = \{Z_k \mid k \in \mathbf{N}\}$ be three effectively given domains. Complete the proof of 7.5 by writing out curry as a relation between neighbourhoods. Is it a recursive set or only a recursively enumerable set?

3.169.2 AI: Human-English to AI-Lean

Exercise_7_16.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_16.lean

3.170 Exercise 7.17

3.170.1 Human-English

EXERCISE 7.17. Complete the proof of 7.7 for showing that $D^{\S}$ is effectively given if D is. Include all the combinators of 6.2. Prove also that if E is effectively given and $u : D \to E$ and $v : E \times E \to E$ are computable, then the unique strict mapping $g : D^{\S} \to E$, where, for $x \in |D|$ and $y, z \in |E|$,

$$g(\mathrm{in}(x)) = u(x), \quad \text{and}$$

$$g(\mathrm{pair}(y, z)) = v(g(y), g(z)),$$

is a computable mapping.

3.170.2 AI: Human-English to AI-Lean

Exercise_7_17.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_17.lean

3.171 Exercise 7.18

3.171.1 Human-English

EXERCISE 7.18. Two effectively given systems D and E are *effectively isomorphic* iff ... (complete the sentence!). Show that if D is effectively given then the isomorphism

$$D^{\infty} \cong (D^{\infty})^{\infty}$$

is effective.

3.171.2 AI: Human-English to AI-Lean

Exercise_7_18.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_18.lean

3.172 Exercise 7.19

3.172.1 Human-English

EXERCISE 7.19. Prove that $D \mapsto \mathbb{P}D$ is a functor by defining for each $f : D \to E$ a mapping

$$\mathbb{P}f : \mathbb{P}D \to \mathbb{P}E$$

by the formula

$$\bigcup_{i<n} \downarrow X_i \quad \mathbb{P}f \quad \bigcup_{j<m} \downarrow Y_j \quad \text{iff} \quad \forall i < n \exists j < m.\, X_i f Y_j \,.$$

Be sure to check that $\mathbb{P}f$ is approximable and that $\mathbb{P}$ preserves identity maps and composition. If f is computable, is $\mathbb{P}f$? Is there a combinator $\lambda f.\, \mathbb{P}f$? What is

$$\mathbb{P}f(\{x, y\}) = ??$$

3.172.2 AI: Human-English to AI-Lean

Exercise_7_19.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_19.lean

3.173 Exercise 7.20

3.173.1 Human-English

EXERCISE 7.20. Show that there is a combinator

$$\text{union} : \mathbb{P}(\mathbb{P}D) \to \mathbb{P}D$$

where for suitable neighbourhoods

$$\bigcup_{i<n} \downarrow \Big(\bigcup_{j<m_i} \downarrow X_{ij} \Big) \quad \text{union} \quad \bigcup_{k<q} \downarrow Y_k \quad \text{iff} \quad \forall i < n \forall j < m_i \exists k < q.\, X_{ij} \subseteq Y_k \,.$$

Is union computable if D is effectively given? What is

$$\text{union}(\{\{x\}, \{y, z\}\}) = ??$$

Are $\mathbb{P}(\mathbb{P}D)$ and $\mathbb{P}D$ generally isomorphic??

3.173.2 AI: Human-English to AI-Lean

Exercise_7_20.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_20.lean

3.174 Exercise 7.21

3.174.1 Human-English

EXERCISE 7.21. Is there a non-trivial combinator of type

$$\mathbb{P}(D \to E) \to (\mathbb{P}D \to \mathbb{P}E)\ ?$$

Are there in general any isomorphisms between the systems

$$(D \to \mathbb{P}E),\ \mathbb{P}(D \times E),\ \mathbb{P}D \times \mathbb{P}E\ ??$$

Is there a non-trivial combinator of type

$$\mathbb{P}(D \times E) \times \mathbb{P}(E \times F) \to \mathbb{P}(D \times F)\ ???$$

Is there any connection between

$$\mathbb{P}\mathbf{N} \text{ and } P\mathbf{N}\ ????$$

3.174.2 AI: Human-English to AI-Lean

Exercise_7_21.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_21.lean

3.175 Exercise 7.22

3.175.1 Human-English

EXERCISE 7.22. (For algebraists.) Let $\Sigma = \{0,1\}^*$ be the free semigroup. A new domain is constructed by defining a family of sets by the least fixed point theorem as follows:

$$S = \{\Sigma\} \cup \{\{\sigma\} \mid \sigma \in \Sigma\} \cup \{XY \mid X, Y \in S\} \cup \{X \cap Y \mid X, Y \in S \text{ and } X \cap Y \neq \emptyset\}.$$

Here we write: $XY = \{\sigma\tau \mid \sigma \in X \text{ and } \tau \in Y\}$.

Prove that S is an effectively given, positive neighbourhood system. (Hint: The sets in S are each "regular events" in the terminology of automata theory, and we have a decision method for the set algebra of regular events.)

Define multiplication on $|S|$ by

$$xy = \{Z \in S \mid \exists X \in x\ \exists Y \in y.\ XY \subseteq Z\},$$

and show $|S|$ becomes a semigroup with Σ embedded into $|S|$ by the homomorphism $\sigma \mapsto \{X \in S \mid \sigma \in X\}$.

Investigate some *infinite words* in S, say those defined by least fixed points such as: $\vec{\sigma} = \sigma\,\vec{\sigma}$ and $\vec{\sigma} = \vec{\sigma}\,\sigma$. Are these equations true:

$$\vec{\sigma}\,\vec{\sigma} = \vec{\sigma}, \quad \vec{\sigma}\,\vec{\sigma}\,\vec{\sigma} = \vec{\sigma}, \quad \vec{\sigma}\,\vec{1}\,\vec{\sigma}\,\vec{1} = \vec{\sigma}\,\vec{1},$$

and $0\vec{1}\,0\vec{1}\,0\vec{1}\,0\vec{1} = 0\vec{1}\,0\vec{1}$?

3.175.2 AI: Human-English to AI-Lean

Exercise_7_22.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_22.lean

3.176 Exercise 7.23

3.176.1 Human-English

EXERCISE 7.23. Complete the discussion of $P\mathbf{N}$ of Example 7.8. Show that the combinators fun and graph of Exercise 5.14 are computable. Also do the same for

$$\lambda x, y.\, x \cap y, \quad \lambda x, y.\, x \cup y, \quad \text{and } \lambda x, y.\, x + y,$$

where for $x, y \in P\mathbf{N}$ we define

$$x + y = \{n + m \mid n \in x \text{ and } m \in y\}.$$

What are the computable elements of $P\mathbf{N}$?

3.176.2 AI: Human-English to AI-Lean

Exercise_7_23.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain 7_23.lean

3.177 Exercise 7.24

3.177.1 Human-English

EXERCISE 7.24. (Suggested by the LUCID language of Ashcroft and Wadge: SIAM Jour. Comp. vol. 5 (1976).)

Define a set Γ by

$$\Gamma = \bigcup_{i=0}^{\infty} (\{i\} \times \Gamma) \cup \{\star\}.$$

Define a system

$$L = \{\Gamma\} \cup \{\{i\} \times X \mid i \in \mathbf{N} \text{ and } X \in L\}.$$

Show that L is effectively given. Show that the elements of $|L|$ can be identified with the finite and infinite sequences of natural numbers. What is the connection between B and L?

Show that the combinators of LUCID can be construed as computable mappings of type

$$(L \to T) \to (L \to T)$$

or of type

$$(L \to T) \times (L \to T) \to (L \to T).$$

Conclude that programs in LUCID define computable maps.

3.177.2 AI: Human-English to AI-Lean

Exercise_7_24.lean

Lean source: DomainTheory/NeighbourhoodSystems/ComputabilityInEffectivelyGivenDomain
7_24.lean

3.178 Retracts of the universal domain

Dependency diagram. Each box is one item. The arrowhead is on the item that imports. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it is not shown. Blue is a definition, green a proposition, amber an example, red a theorem, and indigo an exercise.

3.179 Introduction

3.179.1 Human-English

3.180 LECTURE VIII

RETRACTS OF THE UNIVERSAL DOMAIN

In order to be able to have a fully flexible method of solving domain equations and to be able to see why the domains obtained are effectively given, we shall embed all the desired domains in one "largest" domain. This universal domain will be easily shown to be effectively given, and the mappings needed to extract the other domains will be found to be computable. In order to be able to carry out this programme, we investigate first how certain subdomains correspond to mappings — the so-called *retracts*. An advantage of this analysis is that all the necessary definitions can be written out in λ-calculus notation, thus demonstrating the power of our mathematical programming language.

3.181 Definition 8.1

3.181.1 Human-English

DEFINITION 8.1. A retraction of a given domain E is an approximable mapping $a : E \to E$ such that $a \circ a = a$. $\square$

3.181.2 AI: Human-English to AI-Lean

Definition_8_1.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Definiti
8_1.lean

3.182 Proposition 8.2

3.182.1 Human-English

PROPOSITION 8.2. If $D \lhd E$ and if $a : E \to E$ is defined by

$$X \; a \; Z \quad \text{iff} \quad \exists Y \in D.\, X \subseteq Y \subseteq Z$$

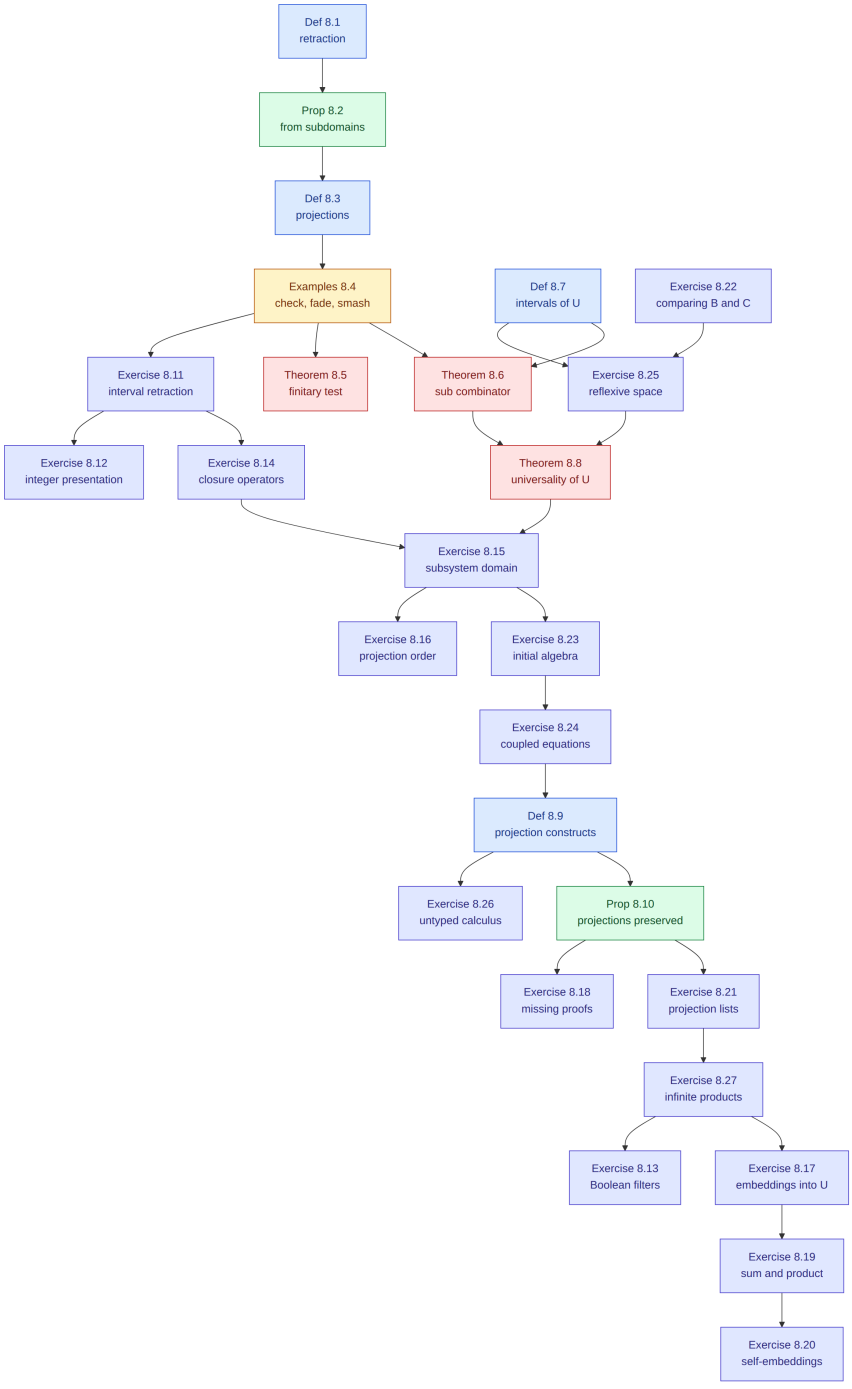


Figure 22: Computability in effectively given domains.

for all $X, Z \in E$, then a is a retraction and $|D|$ is isomorphic to the fixed-point set of a, the set $\{y \in |E| \mid a(y) = y\}$, under inclusion.

Proof: That a is an approximable mapping is a direct consequence of Definition 6.10. Indeed, in the notation of Proposition 6.12, we have

$$a = i \circ j,$$

and this is another proof that a is approximable. This remark is also convenient, since we know from 6.10

$$j \circ i = I_D.$$

Therefore, we find:

$$a \circ a = i \circ j \circ i \circ j = i \circ j = a;$$

and so a is a retraction.

We can also employ i and j to give the isomorphism on $|D|$. If $x \in |D|$, then $i(x) \in |E|$ and we calculate:

$$a(i(x)) = i \circ j \circ i(x) = i(x).$$

Thus, $i(x)$ belongs to the fixed-point set of a. In the other direction, if $a(y) = y$, then $i(j(y)) = y$. But $j(y) \in |D|$, so i maps $|D|$ one-one and onto the fixed-point set of a. As i and j are monotone, the map is an isomorphism with respect to $\sqsubseteq$. □

Not every retraction comes from a relationship like $D \triangleleft E$; in fact, we can see from the definition of a above that $a \sqsubseteq 1_E$. But, as is indicated in Exercise 8.11, even this condition is not sufficient to characterize the kind of retractions provided by 8.2. The characterization is as follows.

3.182.2 AI: Human-English to AI-Lean

Proposition_8_2.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Proposit
8_2.lean

3.183 Definition 8.3

3.183.1 Human-English

DEFINITION 8.3. A retraction $a : E \to E$ is called a *projection* provided

$$a \sqsubseteq 1_E;$$

it is *finitary* iff its fixed-point set is isomorphic to a domain. □

3.183.2 AI: Human-English to AI-Lean

Definition_8_3.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Definiti
8_3.lean

3.184 Examples 8.4

3.184.1 Human-English

EXAMPLES 8.4. If a system D over Δ is not trivial, then the two element system $O = \{\{0\}, \{0,1\}\}$ comes from a retraction on D. Specifically, define a combinator

$$\mathrm{check} : D \to O$$

by the relation

$$X \ \mathrm{check}\ Y \quad \text{iff either } Y = \{0,1\} \text{ or } X \neq \Delta.$$

We see $\mathrm{check}(x) = \bot_O$ iff $x = \bot_D$. We leave to the reader the definition of a combinator:

$$\mathrm{fade} : O \times D \to D,$$

where we have for $t \in |O|$ and $x \in |D|$:

$$\begin{aligned} \mathrm{fade}(t,x) &= \bot_D, \text{ if } t = \bot_O; \\ &= x, \text{ if not.} \end{aligned}$$

Now, take any $u \in |D|$ with $u \neq \bot$, and define

$$a(x) = \mathrm{fade}(\mathrm{check}(x), u).$$

Then a is a retraction (not a projection in general) and the range of a is isomorphic to O.

Another way of using these combinators is to find $(D \to_\bot E)$ as a retraction of $(D \to E)$. Specifically, define a combinator

$$\mathrm{strict} : (D \to E) \to (D \to E)$$

by the equation

$$\mathrm{strict}(f) = \lambda x.\ \mathrm{fade}(\mathrm{check}(x), f(x)),$$

where this time

$$\mathrm{fade} : O \times E \to E\ .$$

The range of strict consists exactly of the strict functions and this time strict is a projection whose range is indeed a domain.

Similarly, we can find a projection on $D \times E$ with a range isomorphic to $D \otimes E$ by the combinator such that:

$$\mathrm{smash}(x,y) = \mathrm{fade}(\mathrm{check}(x), \mathrm{fade}(\mathrm{check}(y), \langle x, y\rangle)),$$

for $x \in |D|$ and $y \in |E|$. $\square$

3.184.2 AI: Human-English to AI-Lean

Examples_8_4.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Examples_8_4.lean

3.185 Theorem 8.5

3.185.1 Human-English

THEOREM 8.5. For an approximable mapping $a : E \to E$ the following are equivalent:

(i) a is a finitary projection;

(ii) $a(x) = \{Y \in E \mid \exists X \in x.\, X \subseteq Y \wedge X\ a\ X\}$, for all $x \in |E|$.

Proof: Suppose a satisfies (ii) first. Inasmuch as $X \in x$ and $X \subseteq Y$ always imply $Y \in x$, for all $x \in |E|$, we see $a(x) \subseteq x$ must always hold. Moreover, it is obvious that $X \in x$ and $X\ a\ X$ always imply $X \in a(x)$; therefore, $a(x) \subseteq a(a(x))$ for all $x \in |E|$. This shows that a

is indeed a projection.

Let $D = \{X \in E \mid X\ a\ X\}$, then it is easy to check that $D \triangleleft E$ and that a is determined from D exactly as in 8.2; thus, the fixed-point set of a is isomorphic to a domain, by what we have already proved. So we have shown (ii) implies (i).

In the converse direction, assume that a is a finitary projection. And let the system D be isomorphic to the fixed-point set of a. We have the situation of Theorem 6.15. There is a projection pair,

$$i : D \to E \quad \text{and} \quad j : E \to D,$$

where the connection with a gives:

$$j \circ i = I_D \quad \text{and} \quad i \circ j = a \subseteq I_E.$$

By 6.15, $D \cong D' \triangleleft E$, and we want to identify D' in terms of a as follows:

$$D' = \{X \in E \mid X\ a\ X\}.$$

Now from a reading of the proof of 6.15 the neighbourhoods of D' are just those corresponding to the finite elements of D. But any such element is a fixed point of a. We have

$$X \in D' \quad \text{implies} \quad a(\uparrow X) = \uparrow X \quad \text{implies} \quad X\ a\ X.$$

Conversely, if $X\ a\ X$ holds, then $\uparrow X \subseteq a(\uparrow X)$. But a is a projection, so $\uparrow X$ is a fixed point. But $i(j(\uparrow X)) = \uparrow X$ means $j(\uparrow X)$ is a finite element of $|D|$. So $X \in D'$, and we have D' identified as desired.

Finally, if we calculate $a = i \circ j$ by the formulae of 6.12 (with D' for D, of course), we obtain our formula (ii). □

The criterion for being a finitary projection just obtained provides us with a very interesting new combinator.

3.185.2 AI: Human-English to AI-Lean

Theorem_8_5.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Theorem_8_5.lean

3.186 Theorem 8.6

3.186.1 Human-English

THEOREM 8.6. For any domain E define

$$\mathrm{sub} : (E \to E) \to (E \to E)$$

by the formula

$$X \ \mathrm{sub}\ (f)\ Z \quad \text{iff} \quad \exists Y \in E.\quad X \subseteq Y \ \ f\ Y \subseteq Z,$$

for all $X, Z \in E$ and all $f : E \to E$. Then the range of sub consists exactly of the finitary projections on E, and moreover sub itself is a finitary projection on $(E \to E)$. If E is effectively given, then sub is computable.

Proof: It is trivial to check that $\mathrm{sub}(f)$ is always approximable. Also, it is obvious from the definition that the correspondence

$$f \mapsto \mathrm{sub}(f)$$

preserves directed unions of f's. Thus, sub is itself approximable. We note that

$$X \subseteq Y \ \ f\ Y \subseteq Z \text{ always implies } X\ f\ Z;$$

hence, $\mathrm{sub}(f) \subseteq f$ holds. Also

$$Y\ f\ Y \text{ always implies } Y\ \mathrm{sub}(f)\ Y,$$

hence, $\mathrm{sub}(f) \subseteq \mathrm{sub}(\mathrm{sub}(f))$ holds. This shows sub to be a projection on $(E \to E)$. The effectiveness of the definition makes it also clear that sub is computable when E has a computable presentation.

Since, sub is a projection, its range is the same as its fixed-point set. If

$$\mathrm{sub}(a) = a,$$

then there is no problem in checking that a satisfies 8.5(ii) *and conversely*. So the range of sub picks out exactly the finitary projections in view of 8.5.

Finally, to prove that sub is a finitary projection of $(E \to E)$, we invoke 6.11 and remark that, in view of 8.2, the fixed point set (range) of sub is in a one-one inclusion-preserving correspondence with the domain $\{D \mid D \lhd E\}$. $\square$

These results have almost completely translated the theory of $\lhd$-subdomains into λ-calculus via the sub-combinator. One last step will complete the passage, and then we shall be able to return to solving domain equations.

3.186.2 AI: Human-English to AI-Lean

Theorem_8_6.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Theorem_8_6.lean

3.187 Definition 8.7

3.187.1 Human-English

DEFINITION 8.7. Let $\mathbb{Q}$ be the set of rational numbers, and let

$$[0,1) = \{q \in \mathbb{Q} \mid 0 \leq q < 1\},$$

and similarly for $[r,s)$ for any $r < s$ in $\mathbb{Q}$. The neighbourhood system $\mathcal{U}$ over $[0,1)$ is the set of all non-empty finite unions of rational intervals $[r,s)$ with $0 \leq r < s \leq 1$. □

A picture of a typical element of $\mathcal{U}$ could be drawn like this:

```
0     r_0   r_1      r_2   r_3      r_4   r_5      1
[======)         [=====)         [=====)
```

Note that any union can be taken as a *disjoint* union of the form

$$\bigcup_{i \leq n} [r_{2i}, r_{2i+1})$$

where $0 \leq r_0 < r_1 < r_2 < \cdots < r_{2n} < r_{2n+1} \leq 1$. (Hint: Any overlapping intervals or abutting intervals can always be combined into one long interval.) It is a most elementary exercise to show that, by virtue of this representation, the system $\mathcal{U}$ has a computable presentation. (Some isomorphic versions of $\mathcal{U}$ — equally effective — are recorded in the exercises.) Note that $\mathcal{U}$ has no minimal neighbourhoods: every set in $\mathcal{U}$ can be written as the union of two disjoint sets in $\mathcal{U}$. (Hint: Use the density of the ordering of $\mathbb{Q}$.) The significance of $\mathcal{U}$ can now be explained.

3.187.2 AI: Human-English to AI-Lean

Definition_8_7.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Definiti8_7.lean

3.188 Theorem 8.8

3.188.1 Human-English

THEOREM 8.8. The system $\mathcal{U}$ is universal in the sense that, for every countable neighbourhood system $\mathcal{D}$, we have

$$\mathcal{D} \trianglelefteq \mathcal{U}.$$

Moreover, if $\mathcal{D}$ is effectively given, then the projection pair making the embedding can be taken as computable. Indeed there is a correspondence between effectively presented domains and the computable, finitary projections of $\mathcal{U}$.

Proof: As $\mathcal{D}$ is countable, we can assume that

$$\mathcal{D} = \{X_n \mid n \in \mathbb{N}\},$$

where $\mathcal{D}$ is a system over a set Δ (say, $X_0 = \Delta$). We shall do the effective and general cases together, where for the latter all remarks on recursiveness are just left out. So, if we want $\mathcal{D}$ effectively given, the above enumeration should be taken as the computable presentation.

Without loss of generality we can assume $\mathcal{D} \cong \mathcal{D}^\dagger$, since otherwise we would just replace $\mathcal{D}$ by $\mathcal{D}^\dagger$. The advantage of this preparation is that unions in $\mathcal{D}^\dagger$ keep things rather *separate* (as we noticed in constructing $\mathbb{P}\mathcal{D}$). In particular, we can be sure of this equivalence:

$$(\blacklozenge) \qquad X_m \subseteq \bigcup_{i<k} X_{n_i} \quad \text{iff} \quad \exists i < k.\, X_m \subseteq X_{n_i}.$$

This property, for example, fails for the system $\mathcal{U}$ as presented in Definition 8.7. However, that observation is of no moment, because we are employing the assumption with respect to $\mathcal{D}$ not $\mathcal{U}$.

The reason for the assumption is this: for $\delta \in \{+, -\}$ define for $X \in \mathcal{D}$:

$$\begin{aligned} \delta X &= X && \text{if } \delta = +; \\ &= \Delta \setminus X && \text{if } \delta = -. \end{aligned}$$

(A similar notation will be used for $Y \in \mathcal{U}$.) Then for $\delta \in \{+, -\}^n$ the sets of the form

$$\bigcap_{i<n} \delta_i X_i \quad (= X_\delta, \text{ for short})$$

form a partition of Δ into (at most) 2^n parts. The reason for assumption $(\blacklozenge)$ is that we can effectively decide for each $\delta \in \{+, -\}^n$ whether one of these intersections is empty or not. (Why? — assuming that $\mathcal{D}$ is effectively given, of course). If for some reason we had not wanted to pass to $\mathcal{D}^\dagger$, we could have made this stronger assumption of decidability on the (positive) system $\mathcal{D}$. ($\mathcal{U}$, for example, satisfies it.)

Suppose, corresponding to $X_0, X_1, \ldots, X_{n-1}$, we have selected $Y_0, Y_1, \ldots, Y_{n-1} \in \mathcal{U}$ so that, for all $\delta \in \{+, -\}^n$,

$$(\blacksquare) \qquad \bigcap_{i<n} \delta_i X_i = \emptyset \quad \text{iff} \quad \bigcap_{i<n} \delta_i Y_i = \emptyset.$$

We wish to show - effectively - how to choose Y_n corresponding to X_n, so that $(\blacksquare)$ holds with $n + 1$ replacing n. Proceeding inductively, we obtain a recursive enumeration of sets $Y_n \in \mathcal{U}$ so that

$$\mathcal{D} \equiv \{Y_n \mid n \in \mathbb{N}\} \triangleleft \mathcal{U}.$$

Clearly the isomorphism (matching X_i to Y_i) will be computable and the projection is computable. (It will then remain only to consider the arbitrary finitary computable projection to complete the proof of the theorem.)

So, consider X_n; for each $\delta \in \{+, -\}^n$ there are four cases:

$$\begin{aligned} X_\delta \cap X_n = \emptyset, \quad X_\delta \cap -X_n = \emptyset, \\ X_\delta \cap X_n \neq \emptyset, \quad X_\delta \cap -X_n \neq \emptyset. \end{aligned}$$

Corresponding to X_δ is a similar intersection Y_δ. If X_δ were $\emptyset$, then Y_δ would be also. If not, $Y_\delta \subseteq [0,1)$ is a union of rational intervals that can be written down explicitly. (Why?) In our four cases on X_n, the first implies the fourth. (Why?) Thus, we need only make some choices in these circumstances:

$$\begin{aligned} X_\delta \cap X_n = \emptyset &: \text{choose } I_{\delta,n} = \emptyset; \\ X_\delta \cap -X_n = \emptyset &: \text{choose } I_{\delta,n} = Y_\delta; \\ \text{otherwise} &: \text{choose } I_{\delta,n} \subseteq Y_\delta, \text{ with } \emptyset \neq I_{\delta,n} \neq Y_\delta. \end{aligned}$$

All these cases are decidable by assumption on $\mathcal{D}$, and the effective choice of (unions of) intervals is effective by construction of $\mathcal{U}$. Now set

$$Y_n = \bigcup_{\delta \in \{+,-\}^n} I_{\delta,n} \neq \emptyset.$$

The set $Y_n \in \mathcal{U}$, it can be found effectively, and (■) is obviously satisfied for $n+1$.

Finally, suppose that a is a computable, finitary projection of $\mathcal{U}$. As we have seen in the proof of 8.5, the domain corresponding to the range of a is isomorphic to the neighbourhood system

$$\{Y \in \mathcal{U} \mid Y \; a \; Y\} \lhd \mathcal{U}.$$

Clearly, if a as a set of ordered pairs of neighbourhoods is recursively enumerable, then the above set is also recursively enumerable (because equality between neighbourhoods is decidable). It follows easily that the subsystem is effectively given as a neighbourhood system in its own right. □

We have now proved that $\mathcal{U}$ is a nice and big domain that is nicely behaved with respect to computable mappings. It has some very interesting subdomains; to name a few:

$$\mathcal{U}+\mathcal{U}, \quad \mathcal{U}\oplus\mathcal{U}, \quad \mathcal{U}\times\mathcal{U}, \quad \mathcal{U}\otimes\mathcal{U}$$

$$\mathcal{U}_\perp, \quad \mathcal{U}^\infty, \quad \mathcal{U}^\S, \quad \mathbb{P}\mathcal{U}, \quad \mathcal{U}\to\mathcal{U}$$

That all of these are $\trianglelefteq \mathcal{U}$ follows from knowing that they are all effectively presented. What we wish to check next is that they all combine well with respect to projections. To this end the explicit definitions are given for the constructs $+$, $\times$, and $\to$, and the details of the others are left for the exercises.

3.188.2 AI: Human-English to AI-Lean

Theorem_8_8.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Theorem_8_8.lean

3.189 Definition 8.9

3.189.1 Human-English

DEFINITION 8.9. Let the computable projection pairs $i_+ : \mathcal{U}+\mathcal{U} \to \mathcal{U}$ and $j_+ : \mathcal{U} \to \mathcal{U}+\mathcal{U}$ be fixed. Similarly choose $i_\times, j_\times$ and $i_\to, j_\to$ for $\mathcal{U}\times\mathcal{U}$ and $\mathcal{U}\to\mathcal{U}$. Define:

$$a + b = \text{cond} \circ \langle \text{which}, i_+ \circ \text{in}_0 \circ a \circ \text{out}_0, i_+ \circ \text{in}_1 \circ b \circ \text{out}_1 \rangle \circ j_+ \; ;$$

$$a \times b = i_\times \circ \langle a \circ \mathrm{proj}_0, b \circ \mathrm{proj}_1 \rangle \circ j_\times \ ;$$

$$a \to b = i_\to \circ (\lambda f.\ b \circ f \circ a) \circ j_\to \ ,$$

for all $a, b : \mathcal{U} \to \mathcal{U}$. □

These interesting(computable!) combinators on elements of $\mathcal{U} \to \mathcal{U}$ have many, many properties. We shall, however, only see what they do to projections.

3.189.2 AI: Human-English to AI-Lean

Definition_8_9.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Definiti
8_9.lean

3.190 Proposition 8.10

3.190.1 Human-English

PROPOSITION 8.10. If $a, b : \mathcal{U} \to \mathcal{U}$ are projections, then so are $a + b$, $a \times b$, and $a \to b$. If a and b are finitary, then so are the others; for the fixed-point set of each of them is isomorphic to the corresponding construct applied to the domains determined by a and b.

Proof: Suppose that $a, b \sqsubseteq I_{\mathcal{U}}$ (= I for short). Then

$$a + b \sqsubseteq I + I = i_+ \circ j_+ \sqsubseteq I.$$

The other cases are similar.

Suppose $a = a \circ a$ and $b = b \circ b$, then, for example,

$$\begin{aligned}(a \times b) \circ (a \times b) &= i_\times \circ \langle a \circ \mathrm{proj}_0,\ b \circ \mathrm{proj}_1 \rangle \circ \langle a \circ \mathrm{proj}_0,\ b \circ \mathrm{proj}_1 \rangle \circ j_\times \\ &= i_\times \circ \langle a \circ a \circ \mathrm{proj}_0,\ b \circ b \circ \mathrm{proj}_1 \rangle \circ j_\times \\ &= a \times b.\end{aligned}$$

The other cases are similar.

Now in case the fixed-point sets of a and b are domains, they are respectively isomorphic to

$$D_a = \{X \in \mathcal{U} \mid X\ a\ X\} \quad \text{and}$$
$$D_b = \{Y \in \mathcal{U} \mid Y\ b\ Y\}.$$

We have to show, for example, that

$$D_a \to D_b \cong D_{a \to b}.$$

Now to simplify matters, remark that the fixed-point set of $a \to b$ on $\mathcal{U}$ is isomorphic to the fixed-point set of $\lambda f.\ b \circ f \circ a$ on $(\mathcal{U} \to \mathcal{U})$. (Hint: use $i_\to$ and $j_\to$ to set up the isomorphism.) So we have to think what it is for an $f : \mathcal{U} \to \mathcal{U}$ to satisfy

$$f = b \circ f \circ a.$$

Notice that we might as well say that $a : \mathcal{U} \to D_a$ and that this map is the other half of an obvious projection pair where

$$i_a : D_a \to \mathcal{U},$$

and $i_a \circ a = a$ and $a \circ i_a = i_a$. So if $g : D_a \to D_b$, let

$$f = i_b \circ g \circ a;$$

then $b \circ f \circ a = f$. Conversely, if f is like this, then let

$$g = b \circ f \circ i_a.$$

Thus, $i_b \circ g \circ a = b \circ f \circ a = f$; so there is an order-preserving isomorphism between the $g : D_a \to D_b$ and the $f = b \circ f \circ a$.

The isomorphism proofs for $+$ and $\times$ are similar. $\Box$

Well, this was a lot of work, but the pay-off is rather handsome. What we have done is transpose all the

$$D_a \triangleleft U$$

over to finitary projections $a : U \to U$. This transposition is an isomorphism, because

$$D_a \triangleleft D_b \text{ iff } a \sqsubseteq b.$$

Moreover, by the method of 8.9 and 8.10, all our favourite constructs have been made into *combinators*, that is, approximable — even computable — maps on the domain of finitary projections. *ALL APPROXIMABLE (COMPUTABLE) MAPS HAVE (COMPUTABLE) FIXED POINTS.* And there you are! The standard fixed-point method is available to obtain computable (i.e. effectively given) solutions to *all* domain equations (even sets of equations) where the constructs can be reworked in *this* way to be defined on projections. Examples are suggested in the exercises.

Another pay-off concerns the λ-calculus itself. Inasmuch as

$$U + U, \quad U \times U, \quad U \to U \triangleleft U,$$

we might just as well forget the outside world and regard all these useful domains as being part of U. For example, on the left we have the new notation and on the right the old notation:

$$\begin{aligned}
\mathrm{which}(z) &= \mathrm{which}(j_+(z)); \\
\mathrm{in}_i(x) &= i_+(\mathrm{in}_i(x)), \quad i = 0, 1; \\
\mathrm{out}_i(x) &= \mathrm{out}_i(j_+(x)), \quad i = 0, 1; \\
\langle x, y \rangle &= i_\times(\langle x, y \rangle); \\
\mathrm{proj}_i(z) &= \mathrm{proj}_i(j_\times(z)), \quad i = 0, 1; \\
u(x) &= j_\to(u)(x); \\
\lambda x.\, \tau &\cong i_\to(\lambda x.\, \tau).
\end{aligned}$$

And, there is no reason to stop here. The system

$$T \cong \{\{0, 1/2\}, \{1/2, 1\}, \{0, 1\}\} \triangleleft U,$$

so we might as well think of

$$\text{true}, \text{false} \in |U|$$

and think of $\text{cond} : U \times U \times U \to U$. No! that is wrong: under the new regime *EVERYTHING IS AN ELEMENT OF U*. With the new meaning of λ, all functions, all pairs, all combinators, all constructs become elements of U.

It takes a little time to get used to "universal conscription" with all elements doing (at least) double duty in the same domain, but there are many advantages, both notational and conceptual.

3.190.2 AI: Human-English to AI-Lean

Proposition_8_10.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Proposit 8_10.lean

3.191 Lecture VIII exercises

3.191.1 Human-English

3.191.2 EXERCISES

3.192 Exercise 8.11

3.192.1 Human-English

EXERCISE 8.11. Let $\mathbb{Q}$ be the set of rational numbers and define a neighbourhood system by the equation

$$R = \{[0, r) \mid r \in \mathbb{Q} \text{ and } 0 < r \leq 1\}.$$

Show that the following defines an approximable map $a : R \to R$:

$$[0, r)\ a\ [0, s) \quad \text{iff} \quad r < s \text{ or } r = s = 1.$$

Show in addition that a is a projection where the fixed-point set of a is in a one-one correspondence with the *real* numbers between 0 and 1 inclusive. (Hint: Recall Dedekind cuts and show $\subseteq$ matches $\leq$.) Conclude that a is *NOT* finitary. (Hint: Aside from $\perp$ there are no finite elements for $\{x \mid x = a(x)\}$.)

3.192.2 AI: Human-English to AI-Lean

Exercise_8_11.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_11.lean

3.193 Exercise 8.12

3.193.1 Human-English

EXERCISE 8.12. Generalize the notation $2X + 1$ for subsets $X \subseteq \mathbb{N}$ to sets of the form

$$2^k X + \ell, \quad \text{where } \ell < 2^k.$$

Let V be the non-empty finite unions of sets $2^k\mathbb{N} + \ell$. Show that $U \cong V$ and that the isomorphism is effective, thus obtaining another presentation of U.

3.193.2 AI: Human-English to AI-Lean

Exercise_8_12.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_12.lean

3.194 Exercise 8.13

3.194.1 Human-English

EXERCISE 8.13. (For logicians.) Prove that the universal domain U is isomorphic to the domain of all proper filters of the free Boolean algebra on $\aleph_0$-generators (= the Lindenbaum algebra of propositional calculus). (For topologists.) Connect this

representation of $\mathcal{U}$ with the collection of non-empty open subsets of the product space $2^{\mathbf{N}}$ (= Cantor space).

3.194.2 AI: Human-English to AI-Lean

Exercise_8_13.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_13.lean

3.195 Exercise 8.14

3.195.1 Human-English

EXERCISE 8.14. A retraction $a : D \to D$ is called a *closure operator* iff $I_D \sqsubseteq a$. On a domain like $P\mathbf{N}$, give some examples of closure operators. (Hint: Close up a set of integers under addition. Is this continuous on $P\mathbf{N}$?) Prove in general for any closure $a : D \to D$ that the fixed-point set of a is always a finitary domain. (Hint: Show that the fixed-point set is closed under intersections and directed unions.) What are the finite elements of the fixed-point set?

3.195.2 AI: Human-English to AI-Lean

Exercise_8_14.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_14.lean

3.196 Exercise 8.15

3.196.1 Human-English

EXERCISE 8.15. Give a direct proof that the domain $\{X \mid X \lhd D\}$ is effectively presented if D is. (Hint: The finite elements of the domain correspond exactly to the finite systems $X \lhd D$.) In the case of $D = \mathcal{U}$, show that the computable elements of the domain correspond exactly to the effectively presented domains (up to effective isomorphism).

3.196.2 AI: Human-English to AI-Lean

Exercise_8_15.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_15.lean

3.197 Exercise 8.16

3.197.1 Human-English

EXERCISE 8.16. For finitary projections $a : E \to E$, write

$$D_a = \{X \in E \mid X \sqsubseteq aX\}$$

(cf. 8.5.). Show that for any two such projections $a, b : E \to E$ we have

$$a \sqsubseteq b \quad \text{iff} \quad D_a \lhd D_b.$$

(This fills in the gap at the end of the proof of 8.6.) Also finish off the proof of 8.8 by showing that if E is effectively given and $a : E \to E$ is computable, then D_a is effectively given.

3.197.2 AI: Human-English to AI-Lean

Exercise_8_16.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_16.lean

3.198 Exercise 8.17

3.198.1 Human-English

EXERCISE 8.17. Find explicitly (if possible) the projection pairs for $\mathcal{U} + \mathcal{U}$, $\mathcal{U} \times \mathcal{U}$, and $\mathcal{U} \to \mathcal{U}$ needed for 8.9. Are any of these domains isomorphic with $\mathcal{U}$? (The author does not know a really good construction for $\mathcal{U} \to \mathcal{U}$.) Find a universal domain $V \neq \mathcal{U}$.

3.198.2 AI: Human-English to AI-Lean

Exercise_8_17.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_17.lean

3.199 Exercise 8.18

3.199.1 Human-English

EXERCISE 8.18. Many of the cases of 8.10 were left unproved. Please establish these assertions explicitly.

3.199.2 AI: Human-English to AI-Lean

Exercise_8_18.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_18.lean

3.200 Exercise 8.19

3.200.1 Human-English

EXERCISE 8.19. Suppose we know both

$$T \quad \text{and} \quad E \to E \trianglelefteq E\,.$$

Does it follow that $E + E$ and $E \times E \trianglelefteq E$?

3.200.2 AI: Human-English to AI-Lean

Exercise_8_19.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_19.lean

3.201 Exercise 8.20

3.201.1 Human-English

EXERCISE 8.20. For any system we know $D \trianglelefteq D + D$, but what about

$$D \trianglelefteq D \times D \quad \text{and} \quad D \trianglelefteq D \to D\,?$$

Would these projections be computable if D is effectively given? Are there more than one projection pair in each case?

3.201.2 AI: Human-English to AI-Lean

Exercise_8_20.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_20.lean

3.202 Exercise 8.21

3.202.1 Human-English

EXERCISE 8.21. Using the fixed-point construction, show that there is a continuous and computable operator $\lambda a.\, a^{\S}$, such that if a is a finitary projection of U, then

$$D_{a^{\S}} \cong (D_a)^{\S}\,.$$

3.202.2 AI: Human-English to AI-Lean

Exercise_8_21.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_21.lean

3.203 Exercise 8.22

3.203.1 Human-English

EXERCISE 8.22. Which of the two relations hold:

$$B \trianglelefteq C \quad \text{or} \quad C \trianglelefteq B \,?$$

Or do they both hold? In general if we use domain equations

$$D = T(D) + S(D)\,, \quad \text{and}$$

$$E = T(E)\,,$$

will $E \trianglelefteq D$ hold? What projections do you see in the examples in 6.2?

3.203.2 AI: Human-English to AI-Lean

Exercise_8_22.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_22.lean

3.204 Exercise 8.23

3.204.1 Human-English

EXERCISE 8.23. Suppose a construct T on domains can be made into a computable operator $t : (U \to U) \to (U \to U)$ so that whenever $a : U \to U$ is a finitary projection, then so is $t(a)$ and

$$D_{t(a)} \cong T(D_a)\,.$$

Does it follow that $\|t\| = \mathrm{fix}(t)$ is such that

$$D_{\|t\|} \cong T(D_{\|t\|})$$

really is the initial solution of the domain equation with respect to projections? Since t is computable, will this solution be effectively given?

3.204.2 AI: Human-English to AI-Lean

Exercise_8_23.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_23.lean

3.205 Exercise 8.24

3.205.1 Human-English

EXERCISE 8.24. Suppose S and T are two (binary-argument) constructs on domains that can be made into computable operators on projections of the universal domain. Show that we can therefore find a pair of effectively presented domains such that

$$D \cong S(D, E) \quad \text{and} \quad E \cong T(D, E).$$

3.205.2 AI: Human-English to AI-Lean

Exercise_8_24.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_24.lean

3.206 Exercise 8.25

3.206.1 Human-English

EXERCISE 8.25. The problem is to find non-trivial solutions to the domain equation

$$(\spadesuit) \qquad D \cong D \to D.$$

Show that the "obvious" solution by retracts is of no use because

$$1 \to 1 = 1$$

for projections. Change the method as follows. Show first

$$U^\infty \times U^\infty \cong U^\infty.$$

Next solve

$$D \cong D \to U^\infty$$

and remark that $U \lhd D$; so D is universal and non-trivial. Finally prove $(\spadesuit)$ for this D. (Hint: First show

$$D \times D \cong D,$$

and then show D satisfies $(\spadesuit)$.) Is this D effectively given?

3.206.2 AI: Human-English to AI-Lean

Exercise_8_25.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_25.lean

3.207 Exercise 8.26

3.207.1 Human-English

EXERCISE 8.26. Discuss in more detail the "pay-off" for U, namely the translation of "untyped" λ-calculus into U as shown by the equations at the end of the lecture after the proof of 8.9. In particular show how the whole of the **typed** λ-calculus can be retranslated back into U with the aid of projections. (Hint: Whenever you want to write

$$f : D_a \to D_b,$$

write instead

$$f = b \circ f \circ a,$$

where a, b are finitary projections. Whenever you want to form a λ-abstraction

$$\lambda x^{D_a}.\, \sigma,$$

where σ is of type D_b, instead form

$$\lambda x.\, b(\sigma'[a(x)/x]),$$

where σ' is the further translation of σ into untyped λ-calculus. Be sure to show that this result "has the right type" in the sense defined above.)

3.207.2 AI: Human-English to AI-Lean

Exercise_8_26.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_26.lean

3.208 Exercise 8.27

3.208.1 Human-English

EXERCISE 8.27. (Suggested by James Donahue.)

Finite cartesian products of domains are formed by the $D_0 \times D_1$-construct we have used so often. The problem is to define — computably — some *infinite* cartesian products. In particular, as applied to the universal domain U, the combinator sub is to be regarded as a finitary projection of U whose fixed points are exactly *all* the finitary projections. A map

$$d = \mathrm{sub} \circ d \circ \mathrm{sub}$$

can be regarded as a *polymorphic type* (because, whenever t is a finitary projection (= type), then so is $d(t)$). The *continuous product* of *all* these types would be the domain of all approximable functions x such that

$$x(t) = d(t)(x(t))$$

for all types t. (Why does this equation mean that x is in the product?) Define Π as a combinator by

$$\Pi = \lambda d\, \lambda x\, \lambda t.\, \mathrm{sub}(d(\mathrm{sub}(t)))(x(\mathrm{sub}(t))).$$

Show that for d a polymorphic type, $\Pi(d)$ is a type. (Hint: It is easy to check that $\Pi(d)$ is a projection; the problem is to show it is *finitary*.)

3.208.2 AI: Human-English to AI-Lean

Exercise_8_27.lean

Lean source: DomainTheory/NeighbourhoodSystems/RetractsOfTheUniversalDomain/Exercise 8_27.lean

4 Information Systems

The purpose of the theory of domains is to give models for spaces on which to define computable functions. The kinds of spaces needed for denotational semantics involve not only spaces of higher type (e.g. function spaces) but also spaces defined recursively (e.g. reflexive domains). Also required are many special domain constructs (or functors) in order to create the desired structures. There are several choices of a suitable category of domains, but the basic one which has the simplest properties is the one sometimes called *consistently complete algebraic* cpo*'s*. This category of domains is studied in this chapter from a new, and it is to be hoped, simpler point of view incorporating the approaches of many authors into a unified presentation. Briefly, the domains of elements are represented set theoretically with the aid of structures called *information systems*. These systems are very familiar from mathematical logic, and their use seems to accord well with intuition. Many things that were done previously axiomatically can now be proved in a straightforward way as theorems. The present chapter discusses many examples in an informal way that should serve as an introduction to the subject.

Dependencies. Each box is one folder. The arrowhead points at the folder that imports, and the number is how many direct imports.

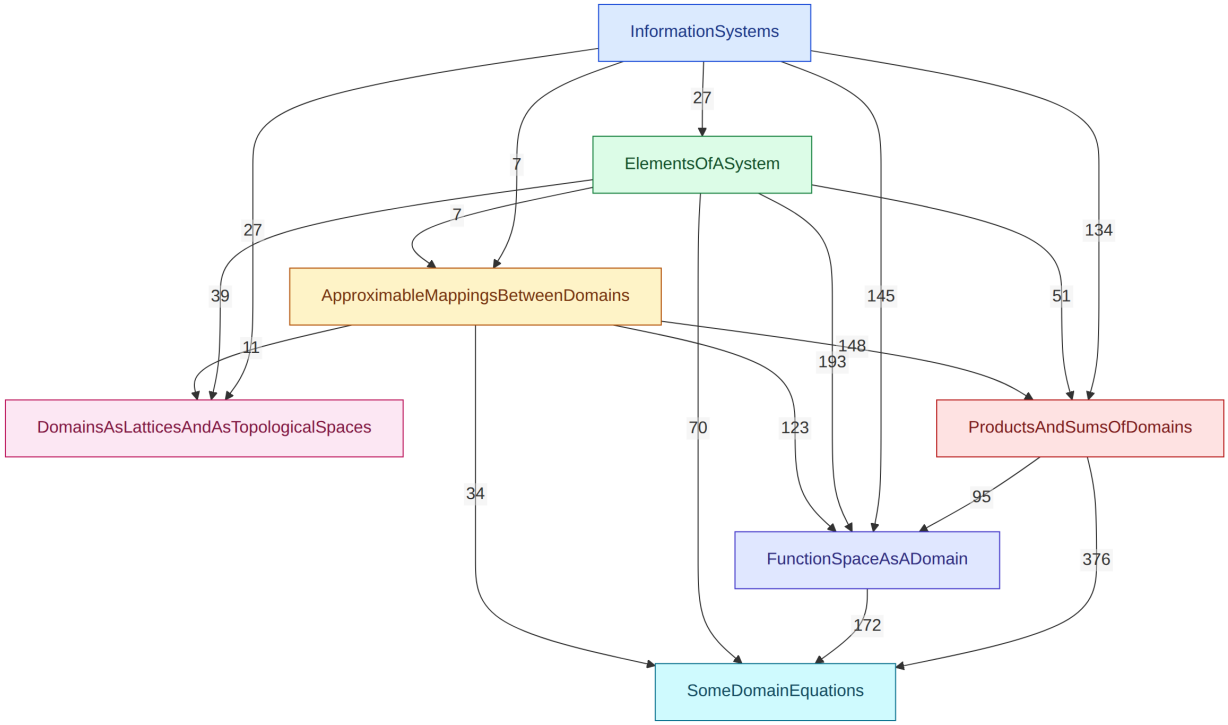


Figure 23: Retracts of the universal domain.

4.1 Introduction

The difficulty in the presentation of the subject is in justifying the level of abstraction used in comparison with the payoff: too often the effort needed for understanding the abstractions does not seem worth the trouble—especially if the notions are unfamiliar or excessively general.

For example, Category Theory, which is much used in discussions of the Theory of Domains, seems far too abstract to many people. On the other hand, Automata Theory—which has often benefited from some use of Category Theory—is quite abstract and, in many aspects perhaps, quite useless, but the level of abstraction is fairly low and the reasons for the definitions are usually evident. Thus, the subject has become by now a standard topic even for undergraduate courses. Michael Rabin and Scott had much to do with influencing the subsequent development of the theory by formulating some years ago some basic concepts (many previously known) in a way that made sense to anyone who had been exposed to a little Abstract Algebra, Logic and Set Theory. This expository part of their paper did not require originality, but rather a certain frame of mind and a certain style of writing to put the ideas and problems in sharp relief. (The original paper is Rabin-Scott [1959]; see the excellent historical review of the subject in Greibach [1981].)

Lattices are very familiar to logicians and those interested in Universal Algebra. But it takes some time to learn the special terminology and to become comfortable with the necessary examples. Indeed, without a stock of examples, it is impossible to have sufficient intuition for making the required constructions. True, some people took to the approach, and the lattice-theoretic definitions were simple enough to motivate. But a much greater percentage of people Scott came in contact with found the large number of things to learn a definite roadblock to understanding. And the Lattice Theory was only partly standard, since this approach to the theory has to employ complete lattices and topological notions in order to explain *limits* and *continuity* adequately. In fact, Topology of a rather mathematically simple set-theoretical kind could have been used as the whole foundation much as in Scott [1972], but that kind of mathematics seems even less attractive to computer scientists. Nevertheless, the lattice-theoretic approach has great consistency and coherence; it has been carried out in full detail in Gierz, *et al.* [1980], which also gives the topological connections. That book contains a large number of references to the mathematical literature to show the connections of the theory to many other topics. What we had to miss out there is a clear hook-up with computability theory, owing simply to a lack of space and time to be able to cover everything.

In Scott [1981], Scott tried out another, different presentation (which is also explained in Scott [1982].) However, Scott found that the use of *neighborhood systems* causes confusion in people not used to thinking in terms of sets of sets of sets of sets . . . , even though the set theory required is quite simple. This section tries out another plan for making the story easy and natural. The notion to be used we call an *information system*. This is a "static" notion appropriate to bodies of information about coherent groups of elements. The "dynamic" ideas enter in the ways different systems can be related and in the semantical definitions about meanings of programming language constructs. (For discussions of semantical definitions see Stoy [1977], Gordon [1979], and Tennent [1981].) Neighborhood systems are, in a precise sense, equivalent to information systems, but there seems to be an interesting trade-off between what properties of structures are *axiomatized* and what are *implicit* in the form of the structure. Perhaps, despite their simplicity, neighborhoods leave too much implicit, too much to be extracted by definition; information systems, on the other hand, do seem to be more flexible in doing several of the important constructions. It all comes down to just where one imposes the closure conditions on the structures. Information systems give the right mix of axioms *vs.* definitions.

Another word about Category Theory: it is particularly significant and important for the theory and for the whole area of semantics. But it must be approached with great caution, for the sheer number of definitions and axioms can try the most patient reader. It is especially necessary in discussing applications of abstract mathematical ideas to keep the motivation strongly in mind. This is often hard to do if the categories get too thick, but of course it all depends on the writer. Category Theory is especially useful in stating *general* properties of structures and in *characterizing* constructions uniquely; however, there often is a problem actually justifying the *existence* of certain constructions, and a direct approach can be quicker than quoting

lots of theorems. But, man cannot live by construction alone: theorems have to be proved in order to get the proper value out of the work. Domain Theory must also be convenient for demonstrating the soundness of various proof rules for properties of recursively defined objects and recursively defined domains. Category Theory can be helpful here. A step in the right direction has been made in the LCF system (see Gordon-Milner-Wadsworth [1979]), which, however, does not take advantage of general Category Theory.

The main purpose of the Theory of Domains in Denotational Semantics is to give a mathematical model of a system of *types*—including function-space types—and to explain a notion of computability with respect to these types. There are many possible theories of types, but the construction of domains is meant to justify recursive definitions at all types, and—most essentially—to justify recursive definitions of types. Pursuing these goals has certain consequences, as we shall see. The model presented here is only one approach, and some comparisons with other methods will be made. Again some help from Category Theory would be welcome in comparing the different kinds of modelling.

One benefit of Domain Theory is that it is possible to make sense of types containing *infinite* elements. The cost required seems to be that the domains therefore have to contain *partial* elements as well as *total* elements. And this is where the lattice-theoretic definitions entered in the earlier presentations: the partial ordering with relations like $x \sqsubseteq y$ was used to express the fact that the element x was "less defined" (i.e. more partial) than y but "contained in" y. The relation $\sqsubseteq$, however, must be subjected to many axioms to have a theory suitable to the desired applications. Instead of such a big group of axioms, we put forward here a construction where the "skeleton" (or better: "backbone") of a domain is introduced by just a few axioms. Then the domain itself is defined as a certain construct from the backbone in order to define the appropriate notion of element. There are several advantages to this approach:

- Simple definitions of the basic concepts can be given.
- Detailed properties are proved as theorems rather than assumed as axioms.
- Emphasis can be given to the constructive nature of the definitions.
- Domains can be made more visible.
- The theory of domains is made more available for applications, because it is easier to produce the needed complex domains.

4.2 Information systems

Dependencies. Inside InformationSystems, each box is one subfolder, or one Lean file sitting directly in the folder. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

4.2.1 Human-English

Intuitively, an information system is a set of "propositions" that can be made about "possible elements" of the desired domain. We will assume that sufficiently many propositions have been supplied to distinguish between distinct elements; as a consequence, an element can be constructed abstractly as the set of all the propositions that are true of it. Partial elements have "small" sets; while total elements have "large" sets (even: maximal). To make this somewhat rough idea precise, we have to explain—by a suitable, but small choice of axioms—how the collection of all propositions relevant to the domain hangs together, or better,

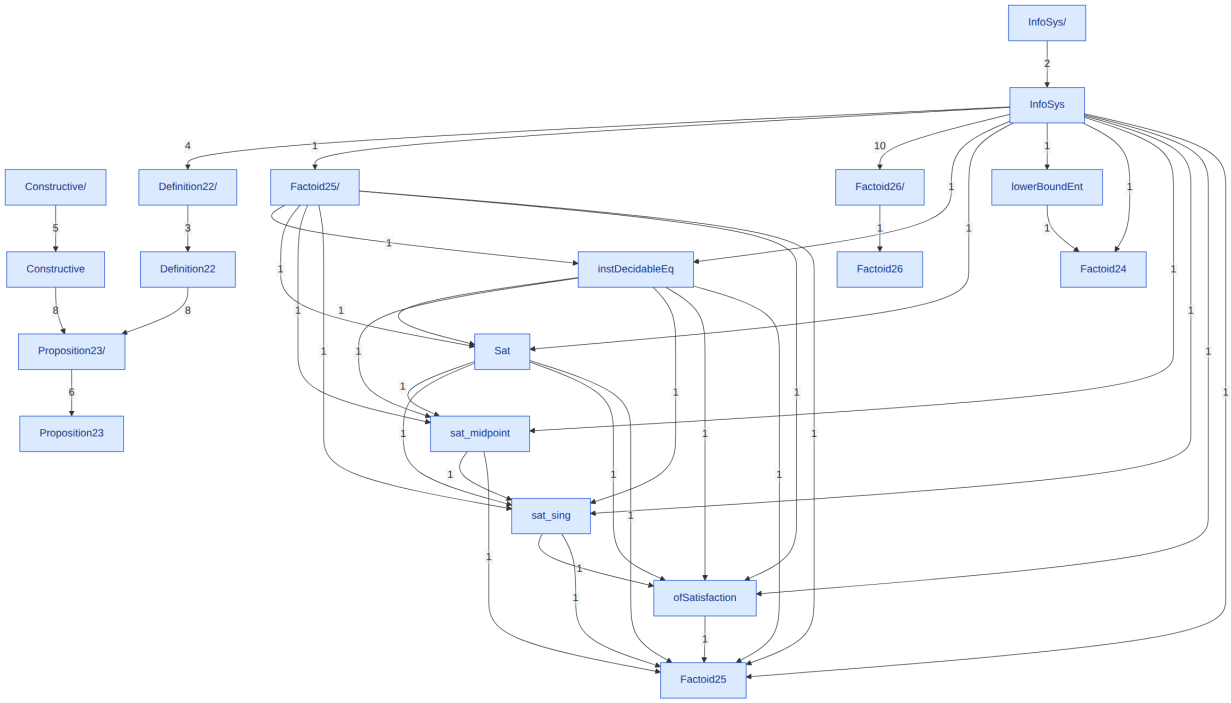


Figure 24: Information Systems.

is structured as a set of abstract propositions. Fortunately, the axioms for this structure are very simple and familiar, which is a great help in making up examples.

- Definition 2.1
- A first example
- A second example
- A third example
- Definition 2.2
- Proposition 2.3

So much for the definition of what an information system is as a mathematical structure. The next question is: What is it good for? More precisely, if information systems are the backbones of domains, then where are the elements? That is the topic of the next section.

4.2.2 AI: Human-English to AI-Lean

InformationSystems/InformationSystems/Constructive/coe_funion.lean

Lean source: `DomainTheory/InformationSystems/InformationSystems/Constructive/coe_funion.lean`

InformationSystems/InformationSystems/Constructive/insert_comm'.lean

Lean source: DomainTheory/InformationSystems/InformationSystems/Constructive/insert_comm'.lean

InformationSystems/InformationSystems/Constructive/instLeftCommutativeInsert.lean

Lean source: DomainTheory/InformationSystems/InformationSystems/Constructive/instLef

InformationSystems/InformationSystems/Constructive/funion.lean

Lean source: DomainTheory/InformationSystems/InformationSystems/Constructive/funion.

InformationSystems/InformationSystems/Constructive/Basic/notation5.lean

Lean source: DomainTheory/InformationSystems/InformationSystems/Constructive/Basic/n

InformationSystems/InformationSystems/Constructive/mem_foldr_insert.lean

Lean source: DomainTheory/InformationSystems/InformationSystems/Constructive/mem_foldr_insert.lean

InformationSystems/InformationSystems/Constructive/mem_funion.lean

Lean source: DomainTheory/InformationSystems/InformationSystems/Constructive/mem_funion.lean

InformationSystems/InformationSystems/Constructive/funion_empty_right.lean

Lean source: DomainTheory/InformationSystems/InformationSystems/Constructive/funion_empty_right.lean

InformationSystems/InformationSystems/Constructive/decidableEq_finset.lean

Lean source: DomainTheory/InformationSystems/InformationSystems/Constructive/decidabfinset.lean

InformationSystems/InformationSystems/Constructive/subset_funion_left.lean

Lean source: DomainTheory/InformationSystems/InformationSystems/Constructive/subset_funion_left.lean

InformationSystems/InformationSystems/Constructive/subset_funion_right.lean

Lean source: DomainTheory/InformationSystems/InformationSystems/Constructive/subset_funion_right.lean

InformationSystems/InformationSystems/Constructive/funion_subset_iff.lean

Lean source: DomainTheory/InformationSystems/InformationSystems/Constructive/funion_subset_iff.lean

InformationSystems/InformationSystems/Constructive.lean

Lean source: DomainTheory/InformationSystems/InformationSystems/Constructive.lean

4.2.3 AI: AI-Lean to AI-English

4.2.4 AI: AI-English to Human-English Concordance

4.3 The elements of a system

Dependencies. Inside ElementsOfASystem, each box is one subfolder, or one Lean file sitting directly in the folder. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

4.3.1 Human-English

Let $\mathbf{A}$ be an information system, and suppose we already had a concept of being an element of $\mathbf{A}$. The data objects are meant to be propositions about elements, so if X is in $D_{\mathbf{A}}$ and if x is an element, then we can be

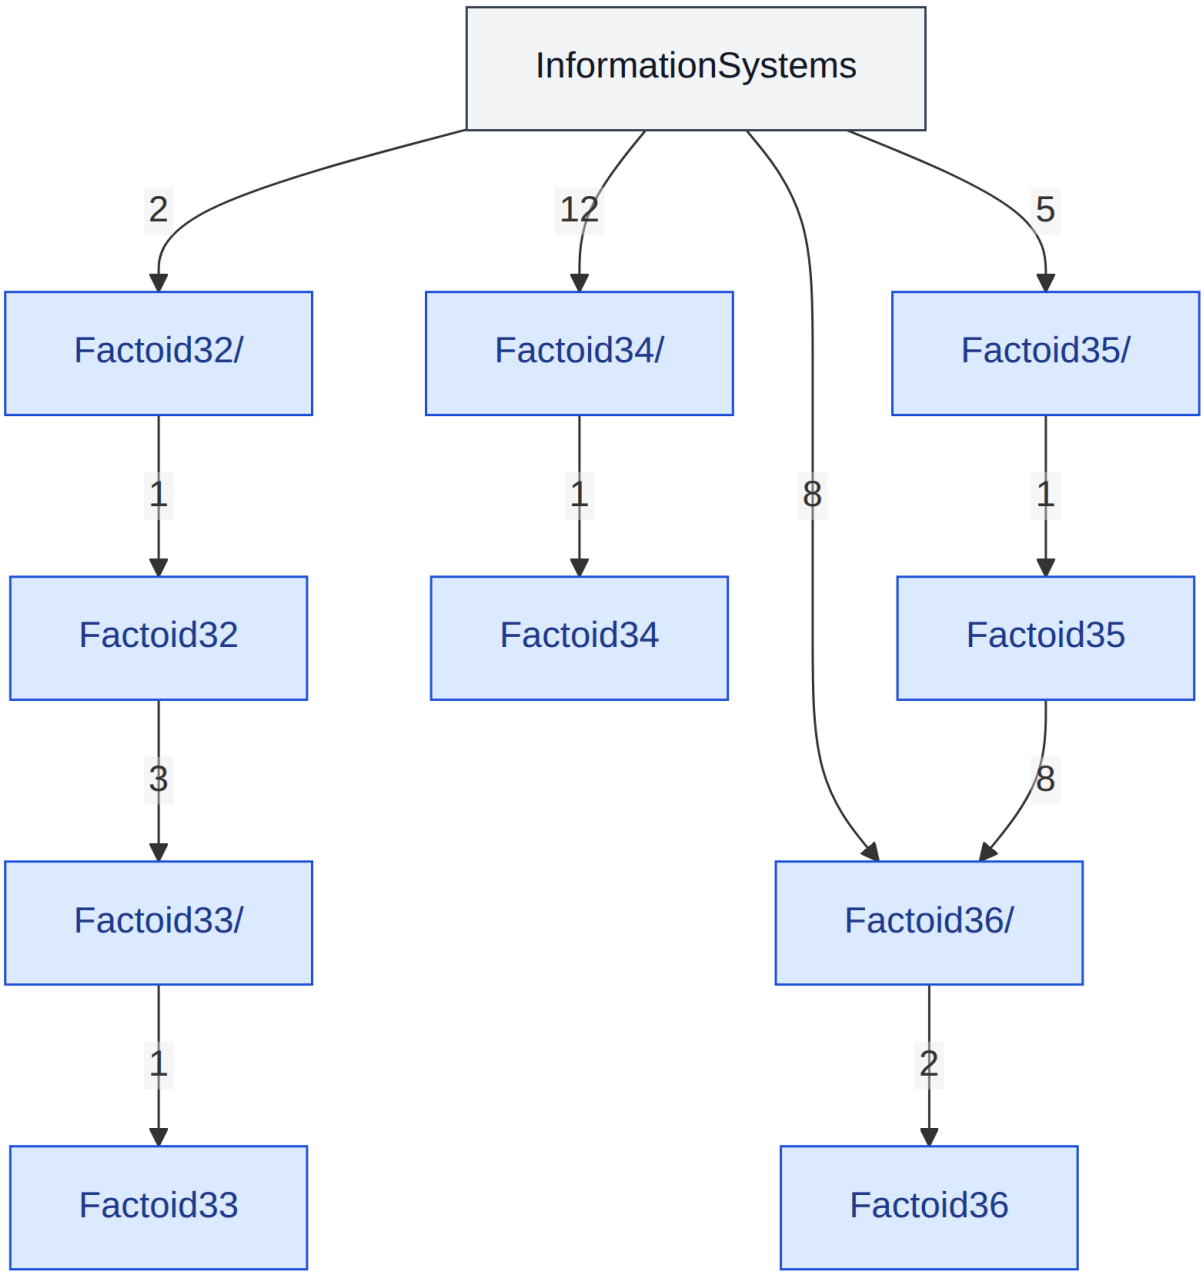


Figure 25: Information systems.

expected to know what it means to say that X is true of x. Since all we are given is the set of data objects $D_{\mathbf{A}}$, we have to assume that it contains enough objects to distinguish between distinct elements. (If there were not enough of them, we would have to change the set $D_{\mathbf{A}}$.) Formally, we can write of two elements x and y:

$$x = y \quad \text{iff all } X \in D_{\mathbf{A}} \text{ which are true of } x \text{ are also true of } y, \text{ and conversely.}$$

If this principle is accepted, then the elements can be *identified* with the sets of propositions true of them; formally we can assert:

$$x = \{X \in D_{\mathbf{A}} \mid X \text{ is true of } x\}.$$

There can be no confusion injected here in identifying elements that ought to be distinct, since we are assuming that there are enough data objects in the system. If for some reason we felt we ought to have more of them to distinguish between more elements, then we would have to pass to a larger and *different* information system. By agreement, then, the above equation is a tautology. So, for the sake of simplicity, elements can be taken to be *sets* of data objects. But, we hasten to ask, which sets? The question is really: What are the properties of truth? The answers are well known, and, in fact, we have already used them in our examples in the last section. In words, the set of true propositions about a possible element must be (i) consistent in itself, and (ii) closed under entailment (or *deductively closed*, for short). Condition (i) is clear because we are talking about a *possible* element, not an impossible one. Condition (ii) is acceptable, because, by the very meaning of the word, entailment should be truth preserving. In addition, we are also saying the converse: *any* set having properties (i) and (ii) corresponds to a (partial) element. Here is the formal statement:

- Definition 3.1

4.3.2 AI: Human-English to AI-Lean

InformationSystems/ElementsOfASystem/Factoid32/factoid_3_2.lean
Lean source: `DomainTheory/InformationSystems/ElementsOfASystem/Factoid32/factoid_3_2.lean`
InformationSystems/ElementsOfASystem/Factoid32.lean
Lean source: `DomainTheory/InformationSystems/ElementsOfASystem/Factoid32.lean`
InformationSystems/ElementsOfASystem/Factoid33/botElement.lean
Lean source: `DomainTheory/InformationSystems/ElementsOfASystem/Factoid33/botElement.`
InformationSystems/ElementsOfASystem/Factoid33.lean
Lean source: `DomainTheory/InformationSystems/ElementsOfASystem/Factoid33.lean`
InformationSystems/ElementsOfASystem/Factoid34/AllConsistent.lean
Lean source: `DomainTheory/InformationSystems/ElementsOfASystem/Factoid34/AllConsiste`
InformationSystems/ElementsOfASystem/Factoid34/IsTotal.lean
Lean source: `DomainTheory/InformationSystems/ElementsOfASystem/Factoid34/IsTotal.lea`
InformationSystems/ElementsOfASystem/Factoid34/eq_of_carrier_univ_of_isTotal.lean
Lean source: `DomainTheory/InformationSystems/ElementsOfASystem/Factoid34/eq_of_carrier_univ_of_isTotal.lean`
InformationSystems/ElementsOfASystem/Factoid34/exists_top_iff_allConsistent.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid34/exists_top_iff_allConsistent.lean

InformationSystems/ElementsOfASystem/Factoid34.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid34.lean

InformationSystems/ElementsOfASystem/Factoid34/isTotal_of_carrier_univ.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid34/isTotal_of_carrier_univ.lean

InformationSystems/ElementsOfASystem/Factoid34/le_topElement.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid34/le_topElement.lean

InformationSystems/ElementsOfASystem/Factoid34/eq_topElement_of_isTotal.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid34/eq_topElement_of_isTotal.lean

InformationSystems/ElementsOfASystem/Factoid34/topElement.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid34/topElement.

InformationSystems/ElementsOfASystem/Factoid34/topElement_isTotal.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid34/topElement_isTotal.lean

InformationSystems/ElementsOfASystem/Factoid34/exists_unique_total_of_allConsistent.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid34/exists_unique_total_of_allConsistent.lean

InformationSystems/ElementsOfASystem/Factoid34/isTotal_iff_eq_topElement.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid34/isTotal_iff_eq_topElement.lean

InformationSystems/ElementsOfASystem/Factoid35/closure.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid35/closure.lea

InformationSystems/ElementsOfASystem/Factoid35/mem_closure_iff.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid35/mem_closure_iff.lean

InformationSystems/ElementsOfASystem/Factoid35/subset_closure.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid35/subset_closure.lean

InformationSystems/ElementsOfASystem/Factoid35.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid35.lean

InformationSystems/ElementsOfASystem/Factoid36/approxUnion.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid36/approxUnion

InformationSystems/ElementsOfASystem/Factoid36/closure_le_element.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid36/closure_le_element.lean

InformationSystems/ElementsOfASystem/Factoid36/closure_le_of_entSet.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid36/closure_le_of_entSet.lean

InformationSystems/ElementsOfASystem/Factoid36/closure_le_of_subset.lean

Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid36/closure_le_of_subset.lean

InformationSystems/ElementsOfASystem/Factoid36/closures_directed.lean
Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid36/closures_directed.lean
InformationSystems/ElementsOfASystem/Factoid36/mem_element_iff_mem_closure.lean
Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid36/mem_element_iff_mem_closure.lean
InformationSystems/ElementsOfASystem/Factoid36/element_eq_approxUnion.lean
Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid36/element_eq_approxUnion.lean
InformationSystems/ElementsOfASystem/Factoid36.lean
Lean source: DomainTheory/InformationSystems/ElementsOfASystem/Factoid36.lean
InformationSystems/InformationSystems/InfoSys/Element.lean
Lean source: DomainTheory/InformationSystems/InformationSystems/InfoSys/Element.lean
InformationSystems/InformationSystems/InfoSys/Basic.lean
Lean source: DomainTheory/InformationSystems/InformationSystems/InfoSys/Basic.lean
InformationSystems/InformationSystems/InfoSys/con_empty.lean
Lean source: DomainTheory/InformationSystems/InformationSystems/InfoSys/con_empty.lean
InformationSystems/InformationSystems/InfoSys.lean
Lean source: DomainTheory/InformationSystems/InformationSystems/InfoSys.lean
InformationSystems/InformationSystems/Factoid26/Basic.lean
Lean source: DomainTheory/InformationSystems/InformationSystems/Factoid26/Basic.lean
InformationSystems/InformationSystems/Definition22.lean
Lean source: DomainTheory/InformationSystems/InformationSystems/Definition22.lean

4.3.3 AI: AI-Lean to AI-English

4.3.4 AI: AI-English to Human-English Concordance

4.4 Domains as lattices and as topological spaces

Dependencies. Inside DomainsAsLatticesAndAsTopologicalSpaces, each box is one subfolder, or one Lean file sitting directly in the folder. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

4.4.1 Human-English

I will attempt to keep this section as informal as possible—especially as Sections 2 and 3 were quite formal (i.e. mathematical) enough. The main purpose of the discussion of this section is to relate the new presentation of the Theory of Domains to previously published ones. (Some alternatives are discussed at the end of the paper.)

Lattice-theoretic considerations. Let $\mathbf{A}$ be an information system. Because the elements of $|\mathbf{A}|$ are introduced as sets, these elements can be given structure from what we know already about ordinary sets. For instance, the set-theoretic inclusion relation between sets can certainly be applied to elements. The question is: What does $x \subseteq y$ mean intuitively? In fact, we have already mentioned this relationship before. It means that every proposition (among the ones given by the information system) true of x is also true of y

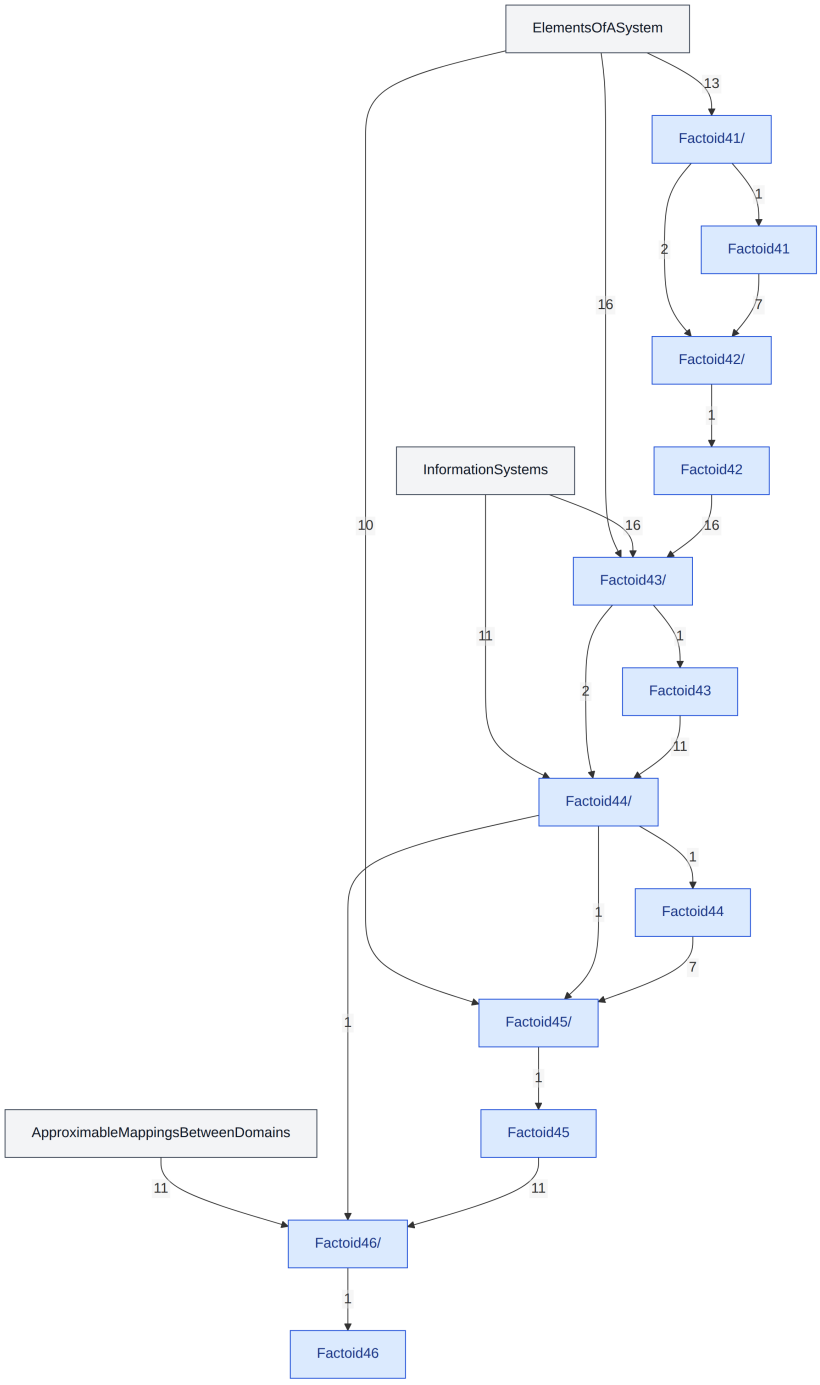


Figure 26: The elements of a system.

(though not necessarily conversely). In other words, x is perhaps only partially determined, while y is more fully determined in a way that includes everything true of x. Clearly, then, if we grant the interest of partial elements, then this relation is a natural and basic one. We often read "$x \subseteq y$" as "x approximates y".

Now here is one of the main points of the new exposition: Because $x \subseteq y$ is *defined* in terms of a familiar mathematical notion, then as a relation between elements it inherits all the well-known properties of the set-theoretical relation. It should not be necessary to write them out, for everyone who can read this far knows that $\subseteq$ is in particular reflexive and transitive. We say that the domain $|\mathbf{A}|$ is a *partially ordered set under inclusion*. We note that this (trivial) result is *proved* from the definition rather than assumed as an axiom.

Let us try out another notion. Elements are consistent, deductively closed sets of data objects. Right? Every subset of a consistent set is consistent, but not every subset is closed under entailment, in general. Right? But suppose that x and y are two elements. It can easily be seen that their intersection $x \cap y$ is again consistent and deductively closed (by a 2 nanosecond proof). Therefore, the set of elements of a domain is closed under intersection. This means that, as a partially ordered set, $|\mathbf{A}|$ is an *inf semilattice*.

Well, the exact terminology is quite unimportant, but the properties of $\cap$ when combined with the properties of $\subseteq$ are pleasantly "algebraic" (and run to several lines when written out). We all know them: $\cap$ is idempotent, commutative, and associative. The element $\bot$, being the The element $\bot$, being the smallest element of the domain, is a zero element for $\cap$. The operation $\cap$ is monotonic with respect to $\subseteq$, and we have the connection:

$$x \subseteq y \text{ iff } x \cap y = x.$$

What has just been alluded to in words is the standard mathematical axiomatization of the properties of an infimum (or meet) operation in a partially ordered set. (Remember, however, to have an operation well defined within a set it is necessary also to have closure under that operation.)

What about infs of subsets? No problem. For any *non-empty* subfamily of $|\mathbf{A}|$, it is just as easy to prove that the set-theoretical intersection of all the elements in the subfamily is again an element of the domain. This makes $|\mathbf{A}|$ a (conditionally) complete inf semilattice. Even if you do not have any idea what I am talking about, it does not matter because the properties of the domain are built in by the very definition; you do not have to worry *at the start* about their formulation, for you can prove them when you need them (if ever).

What about suprema (or sups or joins)? Here there is a slight problem, because in the way we set things up they *do not* always have to exist. Consider what happens with just two elements x and y. The set-theoretical union of the two elements as subsets of $D_{\mathbf{A}}$ need be neither consistent nor deductively closed; and even if $x \cup y$ is consistent, it need not be closed under entailment. So if we want sups *within* $|\mathbf{A}|$, we cannot get by as cheaply as we can with a domain of arbitrary sets for which the simple union is the answer.

Let us write the sup (supposing it exists in $|\mathbf{A}|$) as $x \sqcup y$. What do we have when we actually have it? By the lore of partially ordered sets, $x \sqcup y$ must be the *least element* in $|\mathbf{A}|$ which includes (in the sense of $\subseteq$) both x and y. Now we have just spoken about infs of families of elements: they exist if the family is non-empty. This indicates that $x \sqcup y$ exists exactly when there is at least one element z in $|\mathbf{A}|$ such that $x \subseteq z$ and $y \subseteq z$. This turns out to be a way to say—entirely inside $|\mathbf{A}|$—that $x \cup y$ is consistent. In other words (and more generally) a sup of a subfamily exists if, and only if, the union of the family is consistent. (And in that case the sup is just the deductive closure of the union—that is, it is generally larger than the simple set-theoretical union.) This has an axiomatic version, but it is slightly complicated by the fact that sups do not always exist. In case $\top_{\mathbf{A}}$ exists, then we always have all the sups, and $|\mathbf{A}|$ is a *complete lattice*. (This is discussed in full axiomatic splendor in Gierz, et al. [1980].) But, let it hasten to be

added, not every complete lattice is isomorphic to a domain. The lattices that correspond to domains are the so-called *algebraic lattices*. (See the discussion loc. cit. for the additional axiomatics required.) When the top is missing, the partially ordered structures corresponding to domains are called *conditionally complete, algebraic cpo's*.

There is, however, an important case in $|\mathbf{A}|$ where the union is consistent and is, in fact, the sup in the domain. Suppose we have a sequence of elements such that

$$x_0 \subseteq x_1 \subseteq x_2 \subseteq \cdots \subseteq x_n \subseteq x_{n+1} \subseteq \cdots$$

As n increases, we can say that the elements x_n are getting "better and better"; thus, they must be approaching something even more desirable *in the limit*. Let

$$y = \bigcup_{n=0}^{\infty} x_n,$$

then there is no question that y is a subset of $D_{\mathbf{A}}$. But is it an element? Consistency, recall, means that every *finite* subset is in $\mathrm{Con}_{\mathbf{A}}$. The trick is that a finite subset of y must be a subset of one of the x_n, because the sequence of elements x_n is increasing. But all the terms of our given sequence are elements, and so, consistent; therefore, every finite subset of y is consistent.

The same argument also shows that the set y of data objects is closed under entailment, because $\vdash_{\mathbf{A}}$ is defined as a relation between finite (consistent) sets and data objects. It follows that since each x_n is a set closed under $\vdash_{\mathbf{A}}$, then so is y. In other words, y is indeed an element. Otherwise said, the domain $|\mathbf{A}|$ is closed under the formation of unions of increasing chains of elements, and the union is, of course, the sup in the sense of the partial ordering. Again we have proved closure rather than assuming it, and the necessary properties of the sup follow from its definition as a union.

This last argument can be generalized—as is well known to mathematicians—to the case of *directed* families of elements. The word "directed," or better "upward-directed," means that every finite number of elements in the family is included in some further element of the family; chains always have this property. A good example of the use of directed sets of elements figures in the discussion of the *finite elements* of the domain.

As we have remarked several times, any consistent set of data objects *generates* an element by closing it up under the entailment relation; thus, in particular, any set $u \in \mathrm{Con}$ generates an element. Let us write

$$\overline{u} = \{X \in D_{\mathbf{A}} \mid u \vdash_{\mathbf{A}} X\}$$

for the *closure* of u under entailment. (This notation could be used for any consistent subset of $D_{\mathbf{A}}$, but the case of finitely generated elements is especially important.) Such a $\overline{u}$ is always an element of $|\mathbf{A}|$; the totality of such elements form, by definition, the *finite elements* of the domain. The notation $\overline{u}$ should of course be decorated with a subscript $\mathbf{A}$, but, as there is no good place to write it in, we leave it out.

We have for all elements x of the domain the basic formula:

$$x = \bigcup \{\overline{u} \mid u \in \mathrm{Con}_{\mathbf{A}} \text{ and } u \subseteq x\}.$$

This can be read intuitively as saying that every element of the domain is the *limit* of its *finite approximations*. And, having used the word "limit" so often, we ought now to say something about how to make the meaning of this word correct mathematically. Note that in the limit representation for x, the union is a directed one. (Why?)

Topological considerations. Geometrically speaking, a topological space is a collection of "points" which group themselves in various "neighborhoods" providing thereby a sense of "nearness." More specifically, a neighborhood of a point in a *metric space* consists of all those points within a certain positive "distance" from the given point; that is, nearness is limited, but it is not pushed to *zero*. The major reason for leaving some "breathing space" around the point comes out in defining continuity of functions.

A function f from one topological space to another is said to be *continuous* provided that, for every point x of the first space, and for every neighborhood in the second space around $f(x)$, it is possible to find—in the first space—a neighborhood around x with the following property. If the function is restricted to this neighborhood, then its values lie entirely in the given neighborhood around $f(x)$. In the metric case we can say that if we do not want the function to wander any great distance from $f(x)$, then there is a restricted distance around x giving a neighborhood over which the function values stay as close to $f(x)$ as specified. This keeps the function from jumping around wildly, since small variations in x lead to only small variations in $f(x)$.

The intuition about continuity is no doubt very clear in the more geometric examples, and geometric intuition can carry us quite far. But the spaces obtained from domain theory are not really geometric spaces, so we need to make some shifts in our metaphors. The geometric notion of a point usually implies that two points are perfectly distinguishable: if x and y are different, then they have disjoint neighborhoods. This is certainly true in the metric case, where, if two points are different, then they are at a positive distance apart. Early on in the study of topological spaces, however, it was found that not all spaces were metric, and weaker separation properties of pairs of distinct points were uncovered. One of the very weak versions of such a condition is called the "T_0-axiom." The best way to put it is that if two points have the same neighborhoods, then they are the same. The contrapositive statement sounds odd: if two points are distinct, then there is a neighborhood that contains one but not the other. The oddity of this statement lies in the feeling that you cannot make up your mind over which is the better point.

In our domains there is already a notion of "betterness" which proves to be very closely related to the implicit neighborhood structure. The reason why our domains, as spaces of points, are not "geometric" in the familiar sense is that they contain partial elements. A geometric point, on the other hand, is "perfect" or totally determined; it cannot be made better than it already is. The metric in common spaces is measuring something other than betterness, for there are competing notions of approximation afoot here. Thus, we must keep our special goals in defining domains clearly in mind to avoid confusion.

Consider an information system $\mathbf{A}$. For each $u \in \mathrm{Con}_{\mathbf{A}}$, we define a corresponding neighborhood of $|\mathbf{A}|$ by the equation:

$$[u]_{\mathbf{A}} = \{x \in |\mathbf{A}| \mid u \subseteq x\}.$$

The neighborhoods of an element x are all those sets $[u]_{\mathbf{A}}$, where $u \subseteq x$. Note that this is the same as saying $\overline{u} \subseteq x$ or $\overline{u}$ approximates x. Indeed, the neighborhoods are in a one-one correspondence with the finite elements of $|\mathbf{A}|$. A neighborhood collects together all those elements sharing the same finite amount of information.

If both $u \subseteq x$ and $v \subseteq x$, then it is easy to see that the intersection of the two neighborhoods is again a neighborhood of x by virtue of the formula:

$$[u]_{\mathbf{A}} \cap [v]_{\mathbf{A}} = [u \cup v]_{\mathbf{A}}.$$

In case u and v are inconsistent with each other, then the intersection will be the empty set $\emptyset$. Because every element of our domain $|\mathbf{A}|$ is the union of the finite elements it contains, it is trivial to prove that two

elements with exactly the same neighborhoods are the same. For these reasons, then, it follows that $|\mathbf{A}|$ is a T_0-topological space. The immediate reaction to this intelligence is: So what?

The answer to this scepticism will appear in the best light when we discuss in the next section the notion of function or mapping appropriate to our domains. The argument will be based on the extremely elementary form of the definition that characterizes the general continuous function together with the fact that the geometric intuition is suggestive of theorems to prove. In Section 6 we will find that the space of all continuous functions between two given domains is also a domain, a most useful result that is interesting topologically. But further interest for Domain Theory comes from the circumstance that there is a connection between geometry and domains. We cannot go into the full details here, but I can make some brief remarks.

Before continuing that discussion, though, it should be remarked that once the topology of the domain has been uncovered, then the unions of chains of elements (or directed sets of elements) are topological limits according to accepted general definitions. Thus, what we felt intuitively was a limiting process (the getting better and better up to the union) is in fact a limit formation in a precise mathematical sense. This helps convince us that we are on the right track.

Total elements as a space. In any domain it can be proved that any element x can be extended to a *total element* t, which is characterized by the property that it is a *maximal* element of the partial ordering. (Perhaps there are many such t, but there is always at least one with $x \subseteq t$.) Recall that the set of all total elements of $|\mathbf{A}|$ is denoted by $\mathrm{Tot}_{\mathbf{A}}$. Because the set $\mathrm{Tot}_{\mathbf{A}} \subseteq |\mathbf{A}|$, it is a topological space itself. Suppose s and t are two distinct total elements, then they must be inconsistent with each other—but we shall prove more. If every finite consistent $u \subseteq s$ also satisfied $u \subseteq t$, then $s \subseteq t$ would follow. But this is impossible, because s is maximal. Let, then, $u \in \mathrm{Con}_{\mathbf{A}}$ with $u \subseteq s$ be chosen so that $u \subseteq t$ fails. Now u must be inconsistent with t, since otherwise there would be an element containing them both. It follows that u must be inconsistent with some $v \in \mathrm{Con}_{\mathbf{A}}$ with $v \subseteq t$. In this way we show that the neighborhoods $[u]_{\mathbf{A}}$ and $[v]_{\mathbf{A}}$ are disjoint.

This argument proves that $\mathrm{Tot}_{\mathbf{A}}$ is a *Hausdorff space* (or T_2-space). We cannot go further into the details here, but it is also a totally disconnected, compact Hausdorff space. (These spaces—well known from studies of Logic and the Theory of Boolean Algebras—are also zero-dimensional.) Assuming the countability of $\mathrm{Con}_{\mathbf{A}}$, which is not such a bold assumption, all such spaces can be conveniently embedded into the real line so as to preserve the topological structure. Perhaps this does not seem so surprising, but it shows that the topological nature of $\mathrm{Tot}_{\mathbf{A}}$, the uppermost level of the T_0 space $|\mathbf{A}|$, is indeed quite geometric. And it can also be shown that any arbitrary continuous function on $\mathrm{Tot}_{\mathbf{A}}$ into *any* topological space can be extended to a continuous function on $|\mathbf{A}|$, so the whole domain proves to be quite a "roomy" space with many good connections to more usual topological spaces.

A note on neighborhood structures. Topological spaces can be defined in several ways, and in general they do not carry a preferred neighborhood structure. (For example, there is no topological significance to the usual rational intervals we use to define neighborhoods for the real line: any similarly dense set of points would do in place of the rational numbers.) Domains, the way we have defined them, however, do have preferred neighborhoods. The set of finite elements of $|\mathbf{A}|$ can be defined topologically, and as we have seen they determine a convenient set of neighborhoods. (The reason for all this is the so-called zero-dimensional character of the domains. There is a higher-dimensional theory, but this leads to continuous lattices and can only be explained using the kind of presentation in Gierz, *et al.* [1980]. It is too long-winded a story for the present paper. The higher-dimensional domains do not have a preferred set of neighborhoods, however.)

Having realized this, it is a short step to giving an algebraic axiomatization of the neighborhood structure. Smyth [1975] contains a presentation in terms of the equivalent notion of

4.4.2 AI: Human-English to AI-Lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid41/inf.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid41/le_iff_inf_eq.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
iff_inf_eq.lean
InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid41.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid41/botElement_inf.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
inf.lean
InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid41/inf_idem.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
idem.lean
InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid41/le_inf.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
inf.lean
InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid41/inf_assoc.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
assoc.lean
InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid41/inf_comm.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
comm.lean
InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid41/inf_botElement.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
botElement.lean
InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid41/inf_le_iff.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
le_iff.lean
InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid41/inf_mono.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
mono.lean
InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid42/familyInfCarrier.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid42/familyInf.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid42/le_familyInf.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
familyInf.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
le_iff.lean
InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid42/familyInf_pair.lean
Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces
pair.lean
InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid42.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid43/IsFinitelyConsistent.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid43/exists_entSet_of_subset_deductive.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/entSet_of_subset_deductive.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid43/deductiveClosure.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid43/familyUnionCarrier.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid43/familySup.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid43/finitelyConsistent_of_upperBound.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/of_upperBound.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid43/join.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid43/subset_deductiveClosure.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/deductiveClosure.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid43/le_familySup.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/familySup.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid43/exists_isLUB_iff.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/isLUB_iff.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid43/le_join_left.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/join_left.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid43/le_join_right.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/join_right.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid43/exists_join_iff.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/join_iff.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid43.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid44/Chain.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid44/IsDirected.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid44.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid44/exists_mem_of_subset_directedUnion.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces mem_of_subset_directedUnion.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid44/finitelyConsistent_of_directed.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces of_directed.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid44/directedSup.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid44/chainSup.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid44/le_directedSup.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces directedSup.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid45/botElement_eq_closure_empty.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces eq_closure_empty.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid45/compact_closure.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces closure.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid45/directed_finiteApproximants.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces finiteApproximants.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid45/finiteApproximants.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid45/nonempty_finiteApproximants.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces finiteApproximants.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid45/eq_directedSup_finiteApproximants.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces directedSup_finiteApproximants.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid45.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid46/ScottContinuous.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid46/basicOpen.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid46/eq_of_basicOpen_eq.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces of_basicOpen_eq.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid46/mem_basicOpen.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces basicOpen.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid46/mono.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid46/ofScottContinuous.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid46/toElement_directedSup.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces directedSup.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid46/toElement_ofScottContinuous.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces ofScottContinuous.lean

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid46.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces/Factoid46/toScottContinuous.lean

Lean source: DomainTheory/InformationSystems/DomainsAsLatticesAndAsTopologicalSpaces

4.4.3 AI: AI-Lean to AI-English

4.4.4 AI: AI-English to Human-English Concordance

4.5 Approximable mappings between domains

Dependencies. Inside ApproximableMappingsBetweenDomains, each box is one subfolder, or one Lean file sitting directly in the folder. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

4.5.1 Human-English

Once a general notion of set or domain has been defined mathematically, the next major issue is: How are the different domains to be related one to another? The answer to this important question can many times be given by defining an appropriate concept of mapping between domains. The answer need not be unique; the same collection of domains may support more than one idea of function depending on the special aspects of the domains that need to be brought out. In the case of the kinds of domains being studied here, there are two principal answers, one of which is to be explained in this section.

In order to understand an appropriate notion of a mapping or a function between domains constructed from information systems, we have to refer back to the way in which elements are introduced. As we have seen in Section 3, an element is a consistent, closed set of data objects. To generate an element, one has to generate more and more of the finite consistent subsets of the element. Note that the separate data objects have to be grouped into these finite consistent sets, because the entailment relation may require a finite set of arbitrary size on the left in making the necessary entailments for closure. It is this kind of passage from a finite set to its closure that is to be generalized in defining mappings.

Consider two domains. To map from one to another, some information about a possible element of the first is presented as input to the function f. Then as output the function f starts generating an element. If the input were u, a consistent set of the first domain, then part of the output in the second domain might be a consistent set v. We could say that there is an input/output relationship set up by f, and indicate by $u\ f\ v$

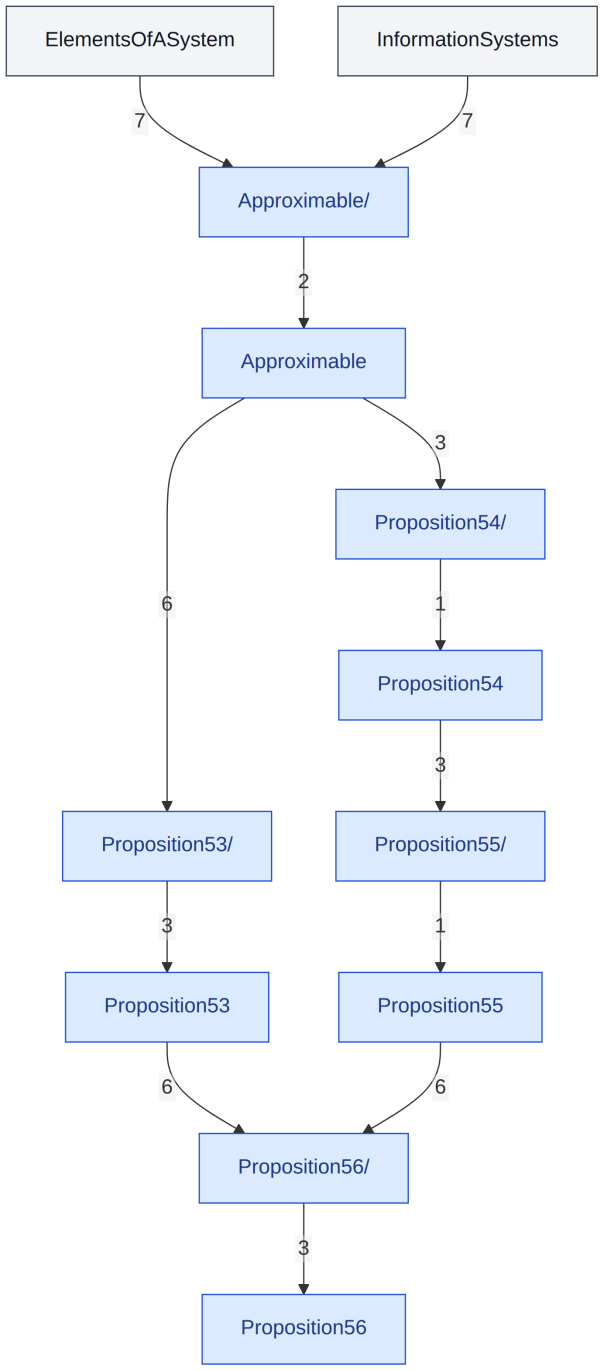


Figure 27: Domains as lattices and as topological spaces.

that this relation holds going from u in the first domain to v in the second. Of course to get the full effect of f, it is necessary to take all the v's related to a given u, because even a small finite amount of input may cause an infinite amount of output. But every element of a domain is just the sum total of its finite subsets (finite approximations), so it is sufficient to make the mapping relationship go between finite sets. Here is the formal definition with the exact conditions that the relation f must satisfy.

- Definition 5.1
- Definition 5.2
- Proposition 5.3
- Proposition 5.4
- Proposition 5.5
- Proposition 5.6

The proof is immediate, since we need only interpret the input/output relation $u\ (\text{const}\ b)\ v$ as meaning $v \subseteq b$. We note that our notation is somewhat ambiguous since, for example, in 5.6(iii) we are using $\text{const}\ b$ in two senses: once as a mapping from $\mathbf{A}$, and once as a mapping from $\mathbf{D}$. In fact, we should hang two subscripts on the thing to fix both the source and the target of the mapping. This is too painful, however, and we generally rely on context to make the meaning clear. (Formal rules of type checking can be given, so on a computer-based system all the necessary subscripts could be put back in. Thus, the kind of ambiguity we are dealing with here is not very serious.)

4.5.2 AI: Human-English to AI-Lean

InformationSystems/ApproximableMappingsBetweenDomains/Approximable/ApproximableMap.lean
Lean source: `DomainTheory/InformationSystems/ApproximableMappingsBetweenDomains/Appr`
InformationSystems/ApproximableMappingsBetweenDomains/Approximable/ext.lean
Lean source: `DomainTheory/InformationSystems/ApproximableMappingsBetweenDomains/Appr`
InformationSystems/ApproximableMappingsBetweenDomains/Approximable/singleton_funion_eq.lean
Lean source: `DomainTheory/InformationSystems/ApproximableMappingsBetweenDomains/Appr funion_eq.lean`
InformationSystems/ApproximableMappingsBetweenDomains/Approximable/exists_rel_of_subset_image.lean
Lean source: `DomainTheory/InformationSystems/ApproximableMappingsBetweenDomains/Appr rel_of_subset_image.lean`
InformationSystems/ApproximableMappingsBetweenDomains/Approximable/toElement.lean
Lean source: `DomainTheory/InformationSystems/ApproximableMappingsBetweenDomains/Appr`
InformationSystems/ApproximableMappingsBetweenDomains/Approximable/Basic.lean
Lean source: `DomainTheory/InformationSystems/ApproximableMappingsBetweenDomains/Appr`
InformationSystems/ApproximableMappingsBetweenDomains/Approximable/toElement_mono.lean
Lean source: `DomainTheory/InformationSystems/ApproximableMappingsBetweenDomains/Appr mono.lean`
InformationSystems/ApproximableMappingsBetweenDomains/Approximable.lean
Lean source: `DomainTheory/InformationSystems/ApproximableMappingsBetweenDomains/Appr`

4.5.3 AI: AI-Lean to AI-English

4.5.4 AI: AI-English to Human-English Concordance

4.6 Products and sums of domains

Dependencies. Inside ProductsAndSumsOfDomains, each box is one subfolder, or one Lean file sitting directly in the folder. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

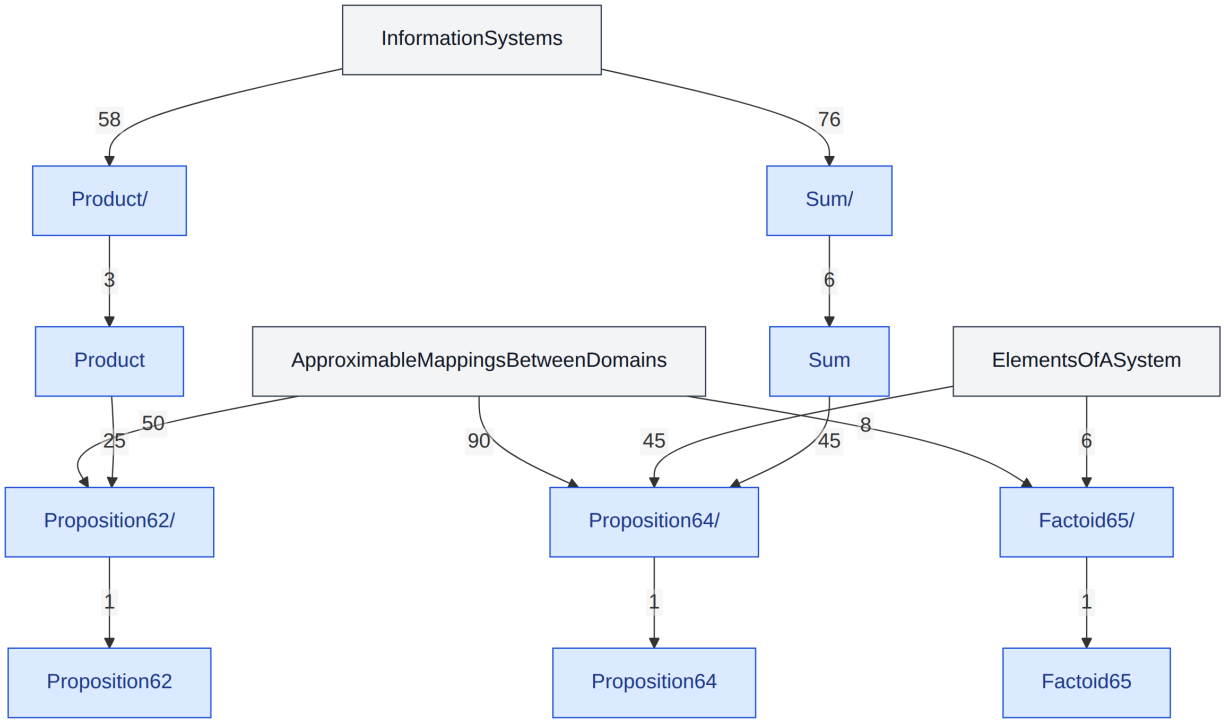


Figure 28: Approximable mappings between domains.

4.6.1 Human-English

In the category of sets, the product (the cartesian product) of two sets is by definition just the set of ordered pairs of elements. We could use the same definition in the category of domains—provided we worked in terms of the elements of the domains. The disadvantage is that the determination of the product domain from data objects is lost, or at least pushed into the background. We shall therefore give a construction of products directly in terms of the given data objects, and then show how to prove that the product is just the one expected when we look at the elements.

The idea for the definition is a simple one. Think of two domains $\mathbf{A}$ and $\mathbf{B}$. A data object $X \in D_{\mathbf{A}}$ can be giving information about a possible element $x \in |\mathbf{A}|$, and a data object $Y \in D_{\mathbf{B}}$ can be giving information about a possible element $y \in |\mathbf{B}|$. How do we wish to give information about the pair (x, y)? The first piece of advice is not to say all that is known all at once. For example, if pressed, we can say

we know X about the first coordinate of the pair; only later, if really pressed, we can say we also know Y about the second coordinate. The point is that data objects provide only partial information, and it does not matter if it takes several of them to give fairly complete information about the whole element. This attitude motivates, then, the particular form of our official definition.

- Definition 6.1
- Proposition 6.2
- Definition 6.3
- Proposition 6.4

It can also be shown that Propositions 6.2 and 6.4 uniquely characterize the domains $\mathbf{A} \times \mathbf{B}$ and $\mathbf{A} + \mathbf{B}$ up to isomorphism, and they give us the existence of additional mappings that are needed to show that product and sum are functors on the category of domains. We can also show from these results that the domain

$$\mathbf{BOOL} = \mathbf{1} + \mathbf{1}$$

has two elements true and false, such that any mapping on $\mathbf{BOOL}$ is uniquely determined by its action on true, false and $\perp_{\mathbf{BOOL}}$, and the values on the first two elements may be arbitrarily chosen.

4.6.2 AI: Human-English to AI-Lean

InformationSystems/ProductsAndSumsOfDomains/Factoid65/toElement_constMap_bot.lean
Lean source: `DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Factoid65/toElconstMap_bot.lean`
InformationSystems/ProductsAndSumsOfDomains/Factoid65.lean
Lean source: `DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Factoid65.lean`
InformationSystems/ProductsAndSumsOfDomains/Factoid65/unitElement_eq_bot.lean
Lean source: `DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Factoid65/uniteq_bot.lean`
InformationSystems/ProductsAndSumsOfDomains/Factoid65/approxMap_from_unit_eq_const.lean
Lean source: `DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Factoid65/apprfrom_unit_eq_const.lean`
InformationSystems/ProductsAndSumsOfDomains/Factoid65/approxMap_to_unit_eq_const.lean
Lean source: `DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Factoid65/apprto_unit_eq_const.lean`
InformationSystems/ProductsAndSumsOfDomains/Factoid65/unitSystem.lean
Lean source: `DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Factoid65/unit`
InformationSystems/ProductsAndSumsOfDomains/Product/IsProdToken.lean
Lean source: `DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Product/IsProd`
InformationSystems/ProductsAndSumsOfDomains/Product/BasicInst5.lean
Lean source: `DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Product/BasicI`
InformationSystems/ProductsAndSumsOfDomains/Product/ProdToken.lean
Lean source: `DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Product/ProdTo`
InformationSystems/ProductsAndSumsOfDomains/Product/BasicInst7.lean

Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Product/BasicI
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Product/fstFin
InformationSystems/ProductsAndSumsOfDomains/Product/instLeftCommutativeFstInsert.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Product/instLe
InformationSystems/ProductsAndSumsOfDomains/Product/instLeftCommutativeSndInsert.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Product/instLe
InformationSystems/ProductsAndSumsOfDomains/Product/fstFinset.lean
InformationSystems/ProductsAndSumsOfDomains/Product/mem_foldr_fst.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Product/mem_
foldr_fst.lean
InformationSystems/ProductsAndSumsOfDomains/Product/mem_foldr_snd.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Product/mem_
foldr_snd.lean
InformationSystems/ProductsAndSumsOfDomains/Product/prodBot.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Product/prodBo
InformationSystems/ProductsAndSumsOfDomains/Product/sndFinset.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Product/sndFin
InformationSystems/ProductsAndSumsOfDomains/Product/ProdCon.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Product/ProdCo
InformationSystems/ProductsAndSumsOfDomains/Product/ProdEnt.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Product/ProdEn
InformationSystems/ProductsAndSumsOfDomains/Product/productSystem.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Product/produc
InformationSystems/ProductsAndSumsOfDomains/Product.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Product.lean
InformationSystems/ProductsAndSumsOfDomains/Sum/SumToken.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum/SumToken.l
InformationSystems/ProductsAndSumsOfDomains/Sum/instDecidableEqSumToken.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum/instDecida
InformationSystems/ProductsAndSumsOfDomains/Sum/lftInsert.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum/lftInsert.
InformationSystems/ProductsAndSumsOfDomains/Sum/instLeftCommutativeLftInsert.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum/instLeftCo
InformationSystems/ProductsAndSumsOfDomains/Sum/SumCon_empty.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum/SumCon_
empty.lean
InformationSystems/ProductsAndSumsOfDomains/Sum/rhtInsert.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum/rhtInsert.
InformationSystems/ProductsAndSumsOfDomains/Sum/instLeftCommutativeRhtInsert.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum/instLeftCo
InformationSystems/ProductsAndSumsOfDomains/Sum/lftFinset.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum/lftFinset.
InformationSystems/ProductsAndSumsOfDomains/Sum/mem_foldr_lft.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum/mem_
foldr_lft.lean

InformationSystems/ProductsAndSumsOfDomains/Sum/mem_foldr_rht.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum/mem_foldr_rht.lean
InformationSystems/ProductsAndSumsOfDomains/Sum/rhtFinset.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum/rhtFinset.
InformationSystems/ProductsAndSumsOfDomains/Sum/SumCon.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum/SumCon.lea
InformationSystems/ProductsAndSumsOfDomains/Sum/SumEnt.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum/SumEnt.lea
InformationSystems/ProductsAndSumsOfDomains/Sum/sumBot.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum/sumBot.lea
InformationSystems/ProductsAndSumsOfDomains/Sum/sumSystem.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum/sumSystem.
InformationSystems/ProductsAndSumsOfDomains/Sum.lean
Lean source: DomainTheory/InformationSystems/ProductsAndSumsOfDomains/Sum.lean

4.6.3 AI: AI-Lean to AI-English

4.6.4 AI: AI-English to Human-English Concordance

4.7 The function space as a domain

Dependencies. Inside FunctionSpaceAsADomain, each box is one subfolder, or one Lean file sitting directly in the folder. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

4.7.1 Human-English

Functions or mappings between domains are of basic importance for our theory, since it is through them that we most easily transform data and relate the structures into which the elements defined by the data objects enter. There are many possible functions, and large groups of them can be treated in a uniform manner. For instance, if the source and target domains match properly, any pair of functions can be composed—composition is an operation on functions of general significance. Now, if in the theory we could combine functions into domains themselves, then an operation like composition might become a mapping of the theory. Indeed, this is exactly what happens: suitably construed, composition is an approximable mapping of two arguments. Of course, for each configuration of linked source and target domains, there is a separate composition operation.

In order to make approximable mappings elements of a suitable domain, we have to discover first what their appropriate data objects are. In Section 5 this was hinted at already. To determine an approximable mapping $f : \mathbf{A} \to \mathbf{B}$, we have to say which pairs (u, v) with $u \in D_{\mathbf{A}}$ and $v \in D_{\mathbf{B}}$ stand in the mapping relation $u\ f\ v$. One such pair gives a certain (finite) amount of information about the possible functions that contain it, and an approximable mapping is completely determined by such pairs. Therefore, if there are appropriate notions of consistency and entailment for these pairs, we will be able to form a domain having functions as elements. Let us try out a formal definition first, and then look to an explanation of how it works.

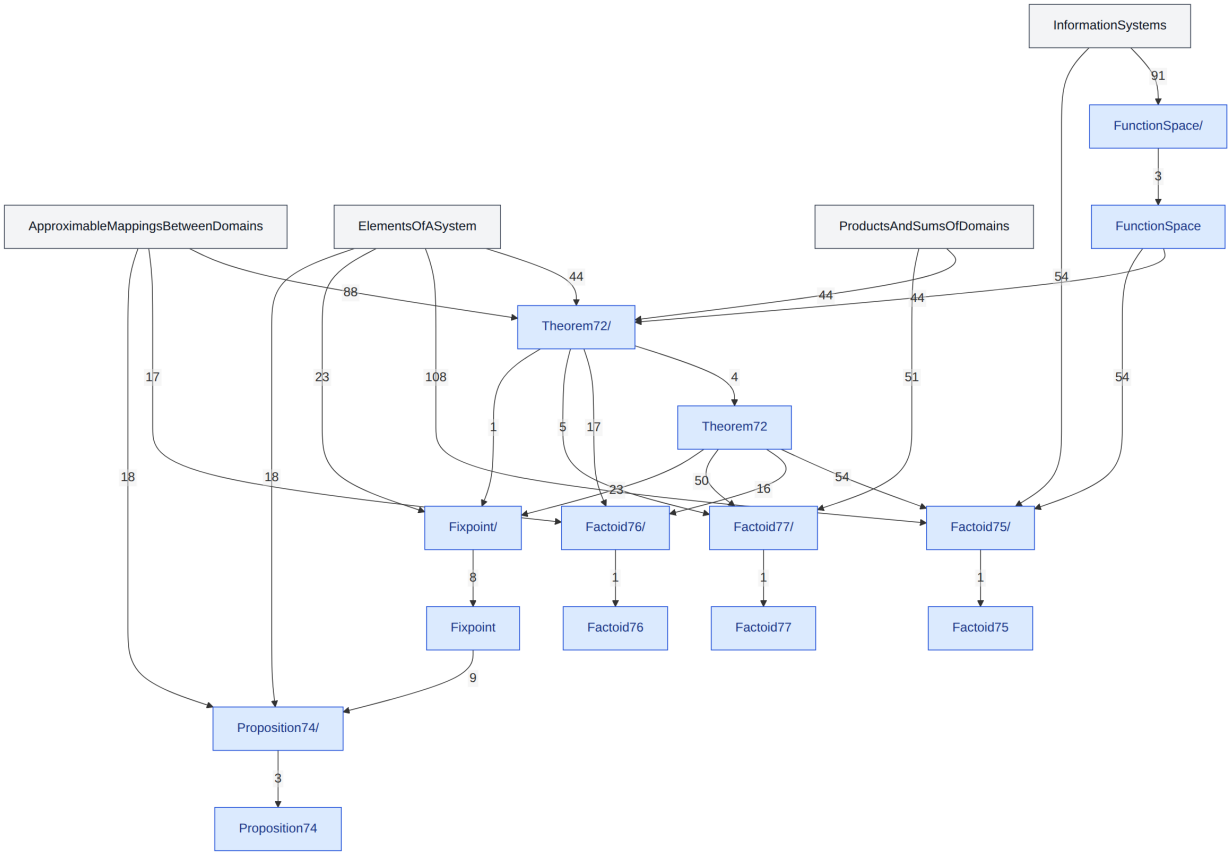


Figure 29: Products and sums of domains.

- Definition 7.1
- Theorem 7.2
- Theorem 7.3
- Proposition 7.4

4.7.2 AI: Human-English to AI-Lean

InformationSystems/FunctionSpaceAsADomain/FunctionSpace/FunToken.lean
Lean source: DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/Fu
InformationSystems/FunctionSpaceAsADomain/FunctionSpace/BasicInst7.lean
Lean source: DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/Ba
Lean source: DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/fu
InformationSystems/FunctionSpaceAsADomain/FunctionSpace/funBot.lean
Lean source: DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/fu
Lean source: DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/fu
InformationSystems/FunctionSpaceAsADomain/FunctionSpace/funion_assoc'.lean
Lean source: DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/fu
assoc'.lean
InformationSystems/FunctionSpaceAsADomain/FunctionSpace/funion_assoc.lean
Lean source: DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/fu
assoc.lean
InformationSystems/FunctionSpaceAsADomain/FunctionSpace/funion_comm'.lean
Lean source: DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/fu
comm'.lean
InformationSystems/FunctionSpaceAsADomain/FunctionSpace/funion_comm.lean
Lean source: DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/fu
comm.lean
InformationSystems/FunctionSpaceAsADomain/FunctionSpace/funion_left_comm'.lean
Lean source: DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/fu
left_comm'.lean
InformationSystems/FunctionSpaceAsADomain/FunctionSpace/funion_left_comm.lean
Lean source: DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/fu
left_comm.lean
InformationSystems/FunctionSpaceAsADomain/FunctionSpace/instLeftCommutativeFunInput.lean
Lean source: DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/in
InformationSystems/FunctionSpaceAsADomain/FunctionSpace/instLeftCommutativeFunOutput.lean
Lean source: DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/in
InformationSystems/FunctionSpaceAsADomain/FunctionSpace/filter_ne_subset_of_subset_
insert.lean
Lean source: DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/fi
ne_subset_of_subset_insert.lean
InformationSystems/FunctionSpaceAsADomain/FunctionSpace/funInputUnion.lean
InformationSystems/FunctionSpaceAsADomain/FunctionSpace/funOutputUnion.lean
InformationSystems/FunctionSpaceAsADomain/FunctionSpace/FunCon.lean

Lean source: `DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/Fu`

InformationSystems/FunctionSpaceAsADomain/FunctionSpace/FunEnt.lean

Lean source: `DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/Fu`

Lean source: `DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/fu`

InformationSystems/FunctionSpaceAsADomain/FunctionSpace/insert_filter_ne.lean

Lean source: `DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/in filter_ne.lean`

InformationSystems/FunctionSpaceAsADomain/FunctionSpace/mem_foldr_funInput.lean

Lean source: `DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/me foldr_funInput.lean`

InformationSystems/FunctionSpaceAsADomain/FunctionSpace/mem_foldr_funOutput.lean

Lean source: `DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/me foldr_funOutput.lean`

InformationSystems/FunctionSpaceAsADomain/FunctionSpace/exists_combined_witness.lean

Lean source: `DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace/ex combined_witness.lean`

InformationSystems/FunctionSpaceAsADomain/FunctionSpace/functionSystem.lean

InformationSystems/FunctionSpaceAsADomain/FunctionSpace.lean

Lean source: `DomainTheory/InformationSystems/FunctionSpaceAsADomain/FunctionSpace.le`

4.7.3 AI: AI-Lean to AI-English

4.7.4 AI: AI-English to Human-English Concordance

4.8 Some domain equations

Dependencies. Inside SomeDomainEquations, each box is one subfolder, or one Lean file sitting directly in the folder. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

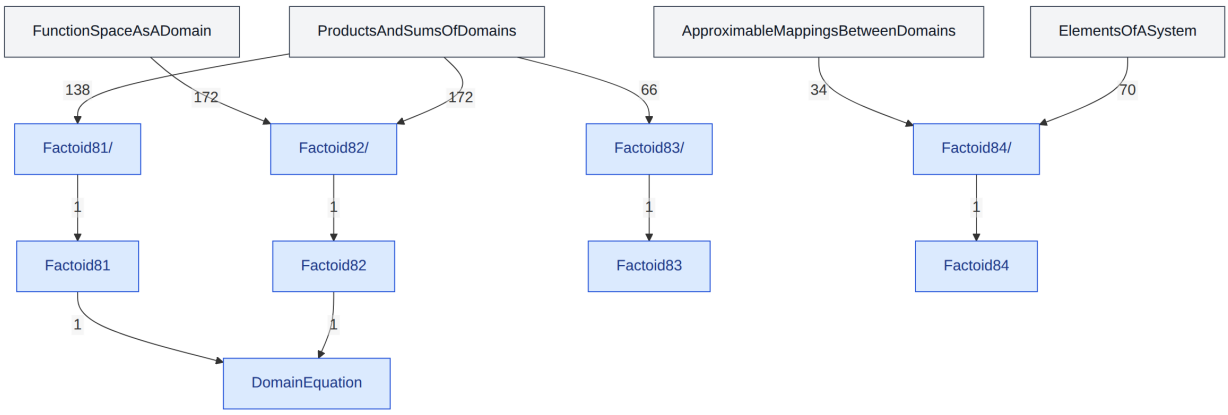


Figure 30: The function space as a domain.

Having outlined the theory of several domain constructs, the final topic for this paper will be the discussion of the *iteration* of these constructs in giving *recursive*, rather than direct definitions of domains.

These recursively defined systems have often been called "reflexive," because the domains generally contain copies of themselves as a part of their very structure. The way that this self-containment takes place is best expressed by the so-called *domain equations*, which are really isomorphisms that relate the domain as a whole to a combination of domains—usually with the main domain as a component. This description is rough, since recursion equations for domains can be as complex as recursion equations for functions. We will not enter into a full theory of domain equations now but will just review some preliminary examples to illustrate how the new presentation makes the constructions more explicit.

4.9 Factoid 8.1

4.9.1 Human-English

A domain of trees or S-expressions. This is everyone's favorite example. And a very nice example it is, but we should not think that it contains all the meat of the theory of domain equations. Even if we generalize the kinds of equations to contain all iterations of the domain constructs $+$ and $\times$, the full power of the method has not been exploited. We will try to make this clear in the further examples.

Let a domain (information system) $\mathbf{A}$ be given. What we want to construct is a domain $\mathbf{T}$ of "trees" built up from elements of $\mathbf{A}$ as "atoms". For simplicity we consider unlabelled binary trees here, but more complex trees are easy to accommodate. The domain equation we want to "solve" is this one:

$$\mathbf{T} \cong \mathbf{A} + (\mathbf{T} \times \mathbf{T}).$$

If such a domain exists, then we can say that (up to isomorphism) the elements of the domain $\mathbf{T}$ are either bottom, or elements of the given domain $\mathbf{A}$, or pairs of elements from the domain $\mathbf{T}$ itself. And these are the only kinds of elements that $\mathbf{T}$ has.

To prove that such a domain exists it is only necessary to ask what information has to be given about a prospective element. The answer may involve us in a regress, but the running backwards need not be infinite—at least for the finite elements. As we shall see, the infinite elements of $\mathbf{T}$ can be self-replicating; but, to define a domain fully, all we have to do is to build up the finite elements out of the data objects in a systematic way. Fortunately, in order to satisfy the above equation, the required closure conditions on data objects are simple to achieve.

In the first place, we need copies of all the data objects of $\mathbf{A}$ to put into the sum. The easy way to do this is to take an object Δ not in $D_{\mathbf{A}}$, and to let, by definition,

$$\Delta_{\mathbf{T}} = (\Delta, \Delta).$$

That gives us one member of $D_{\mathbf{T}}$, the one we always have to have in any case. The copy of an $X \in D_{\mathbf{A}}$ is just going to be (X, Δ). The other members of $D_{\mathbf{T}}$ will be of the form (Δ, U), where U gives us information about the other kind of elements of $\mathbf{T}$. The point is that $\mathbf{T}$ has to be a sum, and we are using just the scheme of Definition 6.3 to set this up.

Next we have to think what kind of information the U above should contain. Because we want a product, we refer back to Definition 6.1 and imagine we have already defined $D_{\mathbf{T}}$. What 6.1(i) suggests is that we throw in a bunch of other data objects into $D_{\mathbf{T}}$. The only point that needs care is that the data objects for the product must be copied into the overall sum. With this in mind, the following clauses give us the inductive definition of $D_{\mathbf{T}}$:

(1) $\Delta_{\mathbf{T}} \in D_{\mathbf{T}}$;

(2) $(X, \Delta) \in D_{\mathbf{T}}$ whenever $X \in D_{\mathbf{A}}$; and

(3) $(\Delta, (Y, \Delta_{\mathbf{T}})) \in D_{\mathbf{T}}$, and $(\Delta, (\Delta_{\mathbf{T}}, Z)) \in D_{\mathbf{T}}$ whenever $Y, Z \in D_{\mathbf{T}}$.

Of course, when we say "inductive definition," we mean that $D_{\mathbf{T}}$ is the least class satisfying (1)–(3). By standard arguments it can be shown that $D_{\mathbf{T}}$ satisfies this set-theoretical equation:

$$D_{\mathbf{T}} = \{\Delta_{\mathbf{T}}\} \cup \{(X, \Delta) \mid X \in D_{\mathbf{A}}\} \cup \{(\Delta, (Y, \Delta_{\mathbf{T}})) \mid Y \in D_{\mathbf{T}}\} \cup \{(\Delta, (\Delta_{\mathbf{T}}, Z)) \mid Z \in D_{\mathbf{T}}\}.$$

In fact, with some very mild assumptions about ordered pairs in set theory, $D_{\mathbf{T}}$ is the only solution to the above equation.

Defining the data objects is but part of the story: the same data objects can enter into quite different information systems. Data objects are just "tokens" and are only given "meaning" when $\mathrm{Con}_{\mathbf{T}}$ and $\vdash_{\mathbf{T}}$ are defined. Let us consider the problem of consistency first. We already understand the notion as it applies to sum and product systems, so we must merely copy over the parts of the previous definitions in the right position for the definition of $\mathrm{Con}_{\mathbf{T}}$. There are two forms we could give this definition; perhaps the best is the inductive one. We have:

(4) $\emptyset \in \mathrm{Con}_{\mathbf{T}}$;

(5) $u \cup \{\Delta_{\mathbf{T}}\} \in \mathrm{Con}_{\mathbf{T}}$ whenever $u \in \mathrm{Con}_{\mathbf{T}}$;

(6) $\{(X, \Delta) \mid X \in w\} \in \mathrm{Con}_{\mathbf{T}}$ whenever $w \in \mathrm{Con}_{\mathbf{A}}$;

(7) $\{(\Delta, (Y, \Delta_{\mathbf{T}})) \mid Y \in u\} \cup \{(\Delta, (\Delta_{\mathbf{T}}, Z)) \mid Z \in v\} \in \mathrm{Con}_{\mathbf{T}}$ whenever $u, v \in \mathrm{Con}_{\mathbf{T}}$.

Conditions (4)–(7) certainly make the inductive character of $\mathrm{Con}_{\mathbf{T}}$ clear—again, let us emphasize, the set being specified is the least such. Also clear from the definition is the fact that a consistent set of $\mathbf{T}$—aside from containing $\Delta_{\mathbf{T}}$—is either a copy of a consistent set of $\mathbf{A}$ or a copy of a consistent set of $\mathbf{T} \times \mathbf{T}$. We could thus state a set-theoretical equation for $\mathrm{Con}_{\mathbf{T}}$ similar to the one for $D_{\mathbf{T}}$.

It remains to define entailment for $\mathbf{T}$. Here are the inductive clauses which are pretty much forced on us by our objective of solving the domain equation:

(8) $u \vdash_{\mathbf{T}} \Delta_{\mathbf{T}}$ always;

(9) $u \cup \{\Delta_{\mathbf{T}}\} \vdash_{\mathbf{T}} Y$ whenever $u \vdash_{\mathbf{T}} Y$;

(10) $\{(X, \Delta) \mid X \in w\} \vdash_{\mathbf{T}} (W, \Delta)$ whenever $w \vdash_{\mathbf{A}} W$;

(11) $\{(\Delta, (Y, \Delta_{\mathbf{T}})) \mid Y \in u\} \cup \{(\Delta, (\Delta_{\mathbf{T}}, Z)) \mid Z \in v\} \vdash_{\mathbf{T}} (\Delta, (X, \Delta_{\mathbf{T}}))$ whenever $u \vdash_{\mathbf{T}} X$ and $v \in \mathrm{Con}_{\mathbf{T}}$; and

(12) $\{(\Delta, (Y, \Delta_{\mathbf{T}})) \mid Y \in u\} \cup \{(\Delta, (\Delta_{\mathbf{T}}, Z)) \mid Z \in v\} \vdash_{\mathbf{T}} (\Delta, (\Delta_{\mathbf{T}}, X))$ whenever $v \vdash_{\mathbf{T}} X$ and $u \in \mathrm{Con}_{\mathbf{T}}$.

Inductive definitions engender inductive proofs. It now has to be checked that consistency and entailment for $\mathbf{T}$ satisfy the axioms of 2.1. The steps needed for this check are mechanical. (The proof may be aided by noting that the cases in (4)–(7) and in (8)–(12) are disjoint—except for a trivial overlap between (8) and

(9). The cases get invoked typically by asking, when confronted with an entailment to prove, for the nature of the data object on the right of the turnstile.)

Having defined and verified that $\mathbf{T}$ is an information system, the validity of the domain equation for $\mathbf{T}$ is secured by forming the right-hand side and noting that $\mathbf{T}$ is *identical* to $\mathbf{A} + (\mathbf{T} \times \mathbf{T})$. The reason is that we carefully chose the notation to match the official definitions of sums and products. (In general, in solving domain equations some transformation might have to take place to "re-format" data objects if things are not set up to be literally the same.)

It should be remarked that the sense can be made precise in which $\mathbf{T}$ is the *least* solution of the given domain equation. (It is an initial algebra in a suitable category of algebras and algebra homomorphisms.) It is pretty obvious that it is minimal in some sense, because we put into it only what was strictly required by the problem and nothing more.

It is also fairly obvious that there are *many* solutions to this domain equation. A non-constructive way to obtain non-minimal solutions is to interpret the whole construction of $\mathbf{T}$ in a non-standard model of set theory. Though, in the definition of $D_{\mathbf{T}}$, it looks like we are only working with very finite objects, everything we did could be made abstract and could be carried out in some funny universe. The result would be a system of "finite" data objects having all the right formal properties but containing things not in the standard minimal system. We would then take the notions of consistency and entailment that also exist in the funny universe and restrict them to sets of data objects that are actually finite in the standard sense. It can be seen from the formal properties of the construction that the resulting notions satisfy our axioms for an information system and that the domain equation holds—BUT the system would have many different elements beyond what we put into the original $\mathbf{T}$. To make this construction work, by the way, we would have to force $\mathbf{A}$ to be absolute in the model: if it is actually finite (say, $\mathbf{A} = \mathbf{BOOL}$), then there is no problem. (Constructive methods for introducing "nonstandard" data objects can also be given.)

Finally, we must remark on why we called $\mathbf{T}$ a domain of S-expressions. The answer becomes clear when we structure $\mathbf{T}$ as an algebra. First, there is an approximable mapping

$$\mathrm{atom} : \mathbf{A} \to \mathbf{T},$$

which injects $\mathbf{A}$ into $\mathbf{T}$ making the elements of $\mathbf{A}$ "atoms" of $\mathbf{T}$. Then there is a truth-valued predicate on $\mathbf{T}$ which decides whether an element is an atom:

$$\mathrm{isatom} : \mathbf{T} \to \mathbf{BOOL}.$$

Finally, since $\mathbf{T} \times \mathbf{T}$ is a part of $\mathbf{T}$, we can redefine the paring functions so that:

$$\mathrm{pair} : \mathbf{T} \times \mathbf{T} \to \mathbf{T}, \quad \mathrm{fst} : \mathbf{T} \to \mathbf{T}, \quad \text{and } \mathrm{snd} : \mathbf{T} \to \mathbf{T}.$$

In LISP terminology, these operations are the same as the familiar cons, car, and cdr. This makes $\mathbf{T}$ into an algebra where, starting from atoms, elements—expressions—can be built up by iterated pairing.

But why is our system different from the usual way of regarding S-expressions? The answer is that by including partial expressions (those involving $\Delta_{\mathbf{T}}$) and by completing the domain with limits, *infinite* expressions are introduced. For instance, if $a \in |\mathbf{T}|$, then we can solve the fixed-point equation:

$$x = \mathrm{pair}(\mathrm{atom}(a), x),$$

which is an infinite list of a's. This is but one example; the possibilities have been discussed in many papers too numerous to mention here.

As is common to remark, S-expressions can also be thought of as trees: the parse tree that gives the grammatical form of the expression. What we have added to the idea of a tree is the possibility of having infinite trees, and having all these trees as elements of a domain. ■

4.9.2 AI: Human-English to AI-Lean

InformationSystems/SomeDomainEquations/Factoid81/TreeToken.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/TreeToken
InformationSystems/SomeDomainEquations/Factoid81/atomInsert.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/atomInser
InformationSystems/SomeDomainEquations/Factoid81/atomFinset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/atomFinse
InformationSystems/SomeDomainEquations/Factoid81/pairLFinset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairLFins
InformationSystems/SomeDomainEquations/Factoid81/mem_pairLFinset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/mem_pairLFinset.lean
InformationSystems/SomeDomainEquations/Factoid81/pairRFinset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairRFins
InformationSystems/SomeDomainEquations/Factoid81/TreeCon.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/TreeCon.l
InformationSystems/SomeDomainEquations/Factoid81/TreeCon_pairL_of_right.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/TreeCon_pairL_of_right.lean
InformationSystems/SomeDomainEquations/Factoid81/TreeCon_pairR_of_right.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/TreeCon_pairR_of_right.lean
InformationSystems/SomeDomainEquations/Factoid81/TreeEntPayload.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/TreeEntPa
InformationSystems/SomeDomainEquations/Factoid81/TreeEnt.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/TreeEnt.l
InformationSystems/SomeDomainEquations/Factoid81/atomFinset_empty.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/atomFinse
empty.lean
InformationSystems/SomeDomainEquations/Factoid81/eq_singleton_bot_of_subset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/eq_singleton_bot_of_subset.lean
InformationSystems/SomeDomainEquations/Factoid81/mem_foldr_atom.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/mem_foldr_atom.lean
InformationSystems/SomeDomainEquations/Factoid81/mem_atomFinset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/mem_atomFinset.lean
InformationSystems/SomeDomainEquations/Factoid81/atomFinset_insert_atom.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/atomFinse
insert_atom.lean

InformationSystems/SomeDomainEquations/Factoid81/atomFinset_insert_bot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/atomFinset_insert_bot.lean

InformationSystems/SomeDomainEquations/Factoid81/atomFinset_insert_pairL.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/atomFinset_insert_pairL.lean

InformationSystems/SomeDomainEquations/Factoid81/atomFinset_insert_pairR.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/atomFinset_insert_pairR.lean

InformationSystems/SomeDomainEquations/Factoid81/atomFinset_mono.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/atomFinset_mono.lean

InformationSystems/SomeDomainEquations/Factoid81/atomFinset_singleton_atom.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/atomFinset_singleton_atom.lean

InformationSystems/SomeDomainEquations/Factoid81/atomFinset_singleton_bot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/atomFinset_singleton_bot.lean

InformationSystems/SomeDomainEquations/Factoid81/atomFinset_singleton_pairL.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/atomFinset_singleton_pairL.lean

InformationSystems/SomeDomainEquations/Factoid81/atomFinset_singleton_pairR.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/atomFinset_singleton_pairR.lean

InformationSystems/SomeDomainEquations/Factoid81/mem_pairRFinset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/mem_pairRFinset.lean

InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_empty.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_empty.lean

InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_insert_atom.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_insert_atom.lean

InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_insert_bot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_insert_bot.lean

InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_insert_pairL.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_insert_pairL.lean

InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_insert_pairR.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_insert_pairR.lean

InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_mono.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_mono.lean

InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_singleton_atom.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairLFinsingleton_atom.lean

InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_singleton_bot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairLFinsingleton_bot.lean

InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_singleton_pairL.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairLFinsingleton_pairL.lean

InformationSystems/SomeDomainEquations/Factoid81/pairLFinset_singleton_pairR.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairLFinsingleton_pairR.lean

InformationSystems/SomeDomainEquations/Factoid81/pairL_ne_or_subset_bot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairL_ne_or_subset_bot.lean

InformationSystems/SomeDomainEquations/Factoid81/pairRFinset_empty.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairRFinsempty.lean

InformationSystems/SomeDomainEquations/Factoid81/TreeCon_empty.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/TreeCon_empty.lean

InformationSystems/SomeDomainEquations/Factoid81/pairRFinset_insert_atom.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairRFinsinsert_atom.lean

InformationSystems/SomeDomainEquations/Factoid81/pairRFinset_insert_bot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairRFinsinsert_bot.lean

InformationSystems/SomeDomainEquations/Factoid81/TreeCon_insert_bot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/TreeCon_insert_bot.lean

InformationSystems/SomeDomainEquations/Factoid81/pairRFinset_insert_pairL.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairRFinsinsert_pairL.lean

InformationSystems/SomeDomainEquations/Factoid81/pairRFinset_insert_pairR.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairRFinsinsert_pairR.lean

InformationSystems/SomeDomainEquations/Factoid81/TreeCon_insert_of_ent.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/TreeCon_insert_of_ent.lean

InformationSystems/SomeDomainEquations/Factoid81/pairRFinset_mono.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairRFinsmono.lean

InformationSystems/SomeDomainEquations/Factoid81/TreeCon_subset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/TreeCon_subset.lean

InformationSystems/SomeDomainEquations/Factoid81/pairRFinset_singleton_atom.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairRFinsset_singleton_atom.lean
InformationSystems/SomeDomainEquations/Factoid81/pairRFinset_singleton_bot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairRFinsset_singleton_bot.lean
InformationSystems/SomeDomainEquations/Factoid81/pairRFinset_singleton_pairL.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairRFinsset_singleton_pairL.lean
InformationSystems/SomeDomainEquations/Factoid81/pairRFinset_singleton_pairR.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairRFinsset_singleton_pairR.lean
InformationSystems/SomeDomainEquations/Factoid81/TreeCon_singleton.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/TreeCon_singleton.lean
InformationSystems/SomeDomainEquations/Factoid81/pairR_ne_or_subset_bot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/pairR_ne_or_subset_bot.lean
InformationSystems/SomeDomainEquations/Factoid81/TreeEntPayload_trans.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/TreeEntPatrans.lean
InformationSystems/SomeDomainEquations/Factoid81/TreeEnt_trans.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/TreeEnt_trans.lean
InformationSystems/SomeDomainEquations/Factoid81/treeBot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/treeBot.l
InformationSystems/SomeDomainEquations/Factoid81.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81.lean
InformationSystems/SomeDomainEquations/Factoid81/treeSystem.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/treeSyste
InformationSystems/SomeDomainEquations/Factoid81/treeRhs.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/treeRhs.l
InformationSystems/SomeDomainEquations/Factoid81/treeUnfold.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid81/treeUnfol

4.9.3 AI: AI-Lean to AI-English

4.9.4 AI: AI-English to Human-English Concordance

4.10 Factoid 8.2

4.10.1 Human-English

A domain for λ-claculus. A lengthy discussion with many references on λ-calculus models can be found in Longo [1982]. All we wish to remark on here is how the method of construction by solving a domain equation can be fit into the new presentation. What I have added to the previous ideas (that in any case came out of an analysis of finite elements of models) is the general view of information systems. In particular

the models obtained this way are *not* lattices—hence, the need for the calculations with Con. I hope that the presentation here makes it clearer how "pure" λ-calculus models can be related to other domains having other types of structures—for instance, those needed in denotational semantics.

The domain equation we wish to solve is:

$$\mathbf{D} \cong \mathbf{A} + (\mathbf{D} \to \mathbf{D}).$$

We proceed in much the same way we did for $\mathbf{T}$, except we must now put in data objects appropriate to the function space. Here is construction, where again Δ is chosen outside $D_{\mathbf{A}}$ and $\Delta_{\mathbf{D}} = (\Delta, \Delta)$:

(1) $\Delta_{\mathbf{D}} \in D_{\mathbf{D}}$;

(2) $(X, \Delta) \in D_{\mathbf{D}}$ whenever $X \in D_{\mathbf{A}}$;

(3) $(\Delta, (u, v)) \in D_{\mathbf{D}}$ whenever $u, v \in \mathrm{Con}_{\mathbf{D}}$;

(4) $\emptyset \in \mathrm{Con}_{\mathbf{D}}$;

(5) $u \cup \{\Delta_{\mathbf{D}}\} \in \mathrm{Con}_{\mathbf{D}}$ whenever $u \in \mathrm{Con}_{\mathbf{D}}$;

(6) $\{(X, \Delta) \mid X \in w\} \in \mathrm{Con}_{\mathbf{D}}$ whenever $w \in \mathrm{Con}_{\mathbf{A}}$; and

(7) $\{(\Delta, (u_0, v_0)), \ldots, (\Delta, (u_{n-1}, v_{n-1}))\} \in \mathrm{Con}_{\mathbf{D}}$ provided $u_i, v_i \in \mathrm{Con}_{\mathbf{D}}$ for all $i < n$ and whenever $I \subseteq \{0, \ldots, n-1\}$ and $\bigcup\{u_i \mid i \in I\} \in \mathrm{Con}_{\mathbf{D}}$, then $\bigcup\{v_i \mid i \in I\} \in \mathrm{Con}_{\mathbf{D}}$.

What is different here from the definition of $\mathbf{T}$ is the fact that the concepts $D_{\mathbf{D}}$ and $\mathrm{Con}_{\mathbf{D}}$ are mutually recursive because the data objects are themselves built from consistent sets. The scheme is based on a combination of the sum construct and the function-space construct, but the mutual recursion allows "feedback" to occur.

To complete the definition we have to give the clauses for the inductive definition of entailment. They are:

(8) $u \vdash_{\mathbf{D}} \Delta_{\mathbf{D}}$ always;

(9) $u \cup \{\Delta_{\mathbf{D}}\} \vdash_{\mathbf{D}} Y$ whenever $u \vdash_{\mathbf{D}} Y$;

(10) $\{(X, \Delta) \mid X \in w\} \vdash_{\mathbf{D}} (W, \Delta)$ whenever $w \vdash_{\mathbf{A}} W$;

(11) $\{(\Delta, (u_0, v_0)), \ldots, (\Delta, (u_{n-1}, v_{n-1}))\} \vdash_{\mathbf{D}} (\Delta, (u', v'))$ whenever $\bigcup\{v_i \mid u' \vdash_{\mathbf{D}} u_i\} \vdash_{\mathbf{D}} v'$ and the set on the left is in $\mathrm{Con}_{\mathbf{D}}$.

Obviously these definitions are much shorter if we have a domain in which all sets are consistent, but there are many reasons for retaining the consistency concept throughout. The check that $\mathbf{D}$ is an information system and satisfies the domain equation is mechanical. We cannot detail here how this construction provides a λ-calculus model.

It is clear that these definitions are constructive, and that, with a suitable Gödel numbering of the data objects, the predicates for consistency and entailment are recursively enumerable. However, the recursion used builds up the predicates by going from less complicated data objects to more complicated ones; therefore, the predicates must be recursive, because, for a certain size data object, the derivation that puts it into the predicate is of a bounded length. This observation helps in the discussion of the computability of the operators defined on these domains—another topic we cannot discuss here. ■

4.10.2 AI: Human-English to AI-Lean

InformationSystems/SomeDomainEquations/Factoid82/RawLamToken.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/RawLamTok
InformationSystems/SomeDomainEquations/Factoid82/lamAtomInsert.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamAtomIn
InformationSystems/SomeDomainEquations/Factoid82/LamEntDepthInst9.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEntDep
InformationSystems/SomeDomainEquations/Factoid82/lamFunInsert.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamFunIns
InformationSystems/SomeDomainEquations/Factoid82/LamEntDepthInst10.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEntDep
InformationSystems/SomeDomainEquations/Factoid82/lamAtomFinset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamAtomFi
InformationSystems/SomeDomainEquations/Factoid82/lamFunFinset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamFunFin
InformationSystems/SomeDomainEquations/Factoid82/listToFinset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/listToFin
InformationSystems/SomeDomainEquations/Factoid82/lamInUnionInsert.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamInUnio
InformationSystems/SomeDomainEquations/Factoid82/LamEntDepthInst17.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEntDep
InformationSystems/SomeDomainEquations/Factoid82/lamOutUnionInsert.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamOutUni
InformationSystems/SomeDomainEquations/Factoid82/LamEntDepthInst18.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEntDep
InformationSystems/SomeDomainEquations/Factoid82/lamInputUnion.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamInputU
InformationSystems/SomeDomainEquations/Factoid82/lamOutputUnion.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamOutput
InformationSystems/SomeDomainEquations/Factoid82/max_le_max_nat.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/max_
le_max_nat.lean
InformationSystems/SomeDomainEquations/Factoid82/mem_lamFunFinset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/mem_
lamFunFinset.lean
InformationSystems/SomeDomainEquations/Factoid82/mem_lamInputUnion.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/mem_
lamInputUnion.lean
InformationSystems/SomeDomainEquations/Factoid82/mem_lamOutputUnion.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/mem_
lamOutputUnion.lean
InformationSystems/SomeDomainEquations/Factoid82/mem_listToFinset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/mem_
listToFinset.lean
InformationSystems/SomeDomainEquations/Factoid82/rawDepth.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/rawDepth.

InformationSystems/SomeDomainEquations/Factoid82/foldl_max_ge_init.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/foldl_max_ge_init.lean

InformationSystems/SomeDomainEquations/Factoid82/foldl_max_mono_init.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/foldl_max_mono_init.lean

InformationSystems/SomeDomainEquations/Factoid82/foldl_list_le_of_mem.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/foldl_list_le_of_mem.lean

InformationSystems/SomeDomainEquations/Factoid82/maxDepthInsert.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/maxDepthI

InformationSystems/SomeDomainEquations/Factoid82/LamEntDepthInst31.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEntDep

InformationSystems/SomeDomainEquations/Factoid82/finsetMaxDepth.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/finsetMax

InformationSystems/SomeDomainEquations/Factoid82/foldr_max_le_of_forall.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/foldr_max_le_of_forall.lean

InformationSystems/SomeDomainEquations/Factoid82/foldr_max_lt_of_forall.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/foldr_max_lt_of_forall.lean

InformationSystems/SomeDomainEquations/Factoid82/rawDepth_funTok_gt_left.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/rawDepth_funTok_gt_left.lean

InformationSystems/SomeDomainEquations/Factoid82/rawDepth_funTok_gt_right.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/rawDepth_funTok_gt_right.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConDepth.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConDep

InformationSystems/SomeDomainEquations/Factoid82/LamEntDepth.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEntDep

InformationSystems/SomeDomainEquations/Factoid82/LamConN.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConN.l

InformationSystems/SomeDomainEquations/Factoid82/LamCon.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamCon.le

InformationSystems/SomeDomainEquations/Factoid82/IsLamToken.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/IsLamToke

InformationSystems/SomeDomainEquations/Factoid82/LamToken.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamToken.

InformationSystems/SomeDomainEquations/Factoid82/BasicInst23.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/BasicInst

InformationSystems/SomeDomainEquations/Factoid82/lamAtomFinset_empty.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamAtomFi empty.lean

InformationSystems/SomeDomainEquations/Factoid82/lamBot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamBot.le
InformationSystems/SomeDomainEquations/Factoid82/lamForget.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamForget
InformationSystems/SomeDomainEquations/Factoid82/lamForgetInsert.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamForget
InformationSystems/SomeDomainEquations/Factoid82/BasicInst27.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/BasicInst
InformationSystems/SomeDomainEquations/Factoid82/LamWF.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamWF.lea
InformationSystems/SomeDomainEquations/Factoid82/LamConDepth_of_fun_empty.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConDep
of_fun_empty.lean
InformationSystems/SomeDomainEquations/Factoid82/LamConDepth_of_fun_nonempty.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConDep
of_fun_nonempty.lean
InformationSystems/SomeDomainEquations/Factoid82/LamDToken.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamDToken
InformationSystems/SomeDomainEquations/Factoid82/BasicInst70.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/BasicInst
InformationSystems/SomeDomainEquations/Factoid82/LamEntN.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEntN.l
InformationSystems/SomeDomainEquations/Factoid82/LamEnt.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEnt.le
InformationSystems/SomeDomainEquations/Factoid82/filter_ne_subset_of_subset_insert_lam.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/filter_
ne_subset_of_subset_insert_lam.lean
InformationSystems/SomeDomainEquations/Factoid82/finsetMaxDepth_funion_le.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/finsetMax
funion_le.lean
InformationSystems/SomeDomainEquations/Factoid82/finsetMaxDepth_insert_le.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/finsetMax
insert_le.lean
InformationSystems/SomeDomainEquations/Factoid82/funion_assoc_lam.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/funion_
assoc_lam.lean
InformationSystems/SomeDomainEquations/Factoid82/funion_comm_lam.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/funion_
comm_lam.lean
InformationSystems/SomeDomainEquations/Factoid82/funion_empty_right_lam.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/funion_
empty_right_lam.lean
InformationSystems/SomeDomainEquations/Factoid82/insert_filter_ne_lam.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/insert_
filter_ne_lam.lean

InformationSystems/SomeDomainEquations/Factoid82/lamDBot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamDBot.l
InformationSystems/SomeDomainEquations/Factoid82/lamDForget.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamDForge
InformationSystems/SomeDomainEquations/Factoid82/lamDForgetInsert.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamDForge
InformationSystems/SomeDomainEquations/Factoid82/BasicInst74.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/BasicInst
InformationSystems/SomeDomainEquations/Factoid82/IsLamWF_of_mem.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/IsLamWF_
of_mem.lean
InformationSystems/SomeDomainEquations/Factoid82/lamDForgetFinset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamDForge
InformationSystems/SomeDomainEquations/Factoid82/LamDCon.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamDCon.l
InformationSystems/SomeDomainEquations/Factoid82/LamDEnt.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamDEnt.l
InformationSystems/SomeDomainEquations/Factoid82/lamForgetFinset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamForget
InformationSystems/SomeDomainEquations/Factoid82/LamTokenCon.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamTokenC
InformationSystems/SomeDomainEquations/Factoid82/LamTokenEnt.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamTokenE
InformationSystems/SomeDomainEquations/Factoid82/lamFunFinset_empty.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamFunFin
empty.lean
InformationSystems/SomeDomainEquations/Factoid82/LamConDepth_empty.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConDep
empty.lean
InformationSystems/SomeDomainEquations/Factoid82/lamFunFinset_funion.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamFunFin
funion.lean
InformationSystems/SomeDomainEquations/Factoid82/lamFunFinset_insert_atom.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamFunFin
insert_atom.lean
InformationSystems/SomeDomainEquations/Factoid82/lamFunFinset_insert_bot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamFunFin
insert_bot.lean
InformationSystems/SomeDomainEquations/Factoid82/lamFunFinset_insert_funTok.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamFunFin
insert_funTok.lean
InformationSystems/SomeDomainEquations/Factoid82/lamFunFinset_mono.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamFunFin
mono.lean
InformationSystems/SomeDomainEquations/Factoid82/lamFunFinset_singleton_funTok.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamFunFinsingleton_funTok.lean

InformationSystems/SomeDomainEquations/Factoid82/lamInputUnion_empty.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamInputUempty.lean

InformationSystems/SomeDomainEquations/Factoid82/lamInputUnion_funion.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamInputUfunion.lean

InformationSystems/SomeDomainEquations/Factoid82/lamInputUnion_insert.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamInputUinsert.lean

InformationSystems/SomeDomainEquations/Factoid82/lamInputUnion_singleton.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamInputUsingleton.lean

InformationSystems/SomeDomainEquations/Factoid82/lamOutputUnion_empty.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamOutputempty.lean

InformationSystems/SomeDomainEquations/Factoid82/lamOutputUnion_funion.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamOutputfunion.lean

InformationSystems/SomeDomainEquations/Factoid82/lamOutputUnion_insert.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamOutputinsert.lean

InformationSystems/SomeDomainEquations/Factoid82/lamOutputUnion_singleton.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamOutputsingleton.lean

InformationSystems/SomeDomainEquations/Factoid82/listToLamDFinset.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/listToLam

InformationSystems/SomeDomainEquations/Factoid82/mem_foldr_lamDForget.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/mem_foldr_lamDForget.lean

InformationSystems/SomeDomainEquations/Factoid82/mem_lamAtomFinset.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/mem_lamAtomFinset.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConDepth_singleton_atom.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConDepsingleton_atom.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConDepth_singleton_bot.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConDepsingleton_bot.lean

InformationSystems/SomeDomainEquations/Factoid82/LamEntDepth_of_mem.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEntDepof_mem.lean

InformationSystems/SomeDomainEquations/Factoid82/lamAtomFinset_insert_atom.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamAtomFi
insert_atom.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConDepth_insert_atom.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConDep
insert_atom.lean

InformationSystems/SomeDomainEquations/Factoid82/lamAtomFinset_insert_bot.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamAtomFi
insert_bot.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConDepth_insert_bot.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConDep
insert_bot.lean

InformationSystems/SomeDomainEquations/Factoid82/lamAtomFinset_insert_funTok.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamAtomFi
insert_funTok.lean

InformationSystems/SomeDomainEquations/Factoid82/lamAtomFinset_mono.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamAtomFi
mono.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConDepth_mono.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConDep
mono.lean

InformationSystems/SomeDomainEquations/Factoid82/LamEntDepth_weaken_atom.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEntDep
weaken_atom.lean

InformationSystems/SomeDomainEquations/Factoid82/LamEntDepth_weaken_fun.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEntDep
weaken_fun.lean

InformationSystems/SomeDomainEquations/Factoid82/LamEntDepth_weaken_insert.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEntDep
weaken_insert.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConDepth_funion_of_entSet.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConDep
funion_of_entSet.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConDepth_insert_of_ent.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConDep
insert_of_ent.lean

InformationSystems/SomeDomainEquations/Factoid82/LamEntDepth_trans.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEntDep
trans.lean

InformationSystems/SomeDomainEquations/Factoid82/lamAtomFinset_singleton_funTok.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamAtomFi
singleton_funTok.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConDepth_singleton_funTok.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConDep
singleton_funTok.lean

InformationSystems/SomeDomainEquations/Factoid82/LamDCon_insert_of_ent.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamDCon_insert_of_ent.lean

InformationSystems/SomeDomainEquations/Factoid82/lambdaSystem.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lambdaSys

InformationSystems/SomeDomainEquations/Factoid82/lamRhs.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamRhs.le

InformationSystems/SomeDomainEquations/Factoid82/mem_listToLamDFinset.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/mem_listToLamDFinset.lean

InformationSystems/SomeDomainEquations/Factoid82/lamDForget_listToLamDFinset.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamDForgelistToLamDFinset.lean

InformationSystems/SomeDomainEquations/Factoid82/lamUnfold.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamUnfold

InformationSystems/SomeDomainEquations/Factoid82/Basic.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/Basic.lea

InformationSystems/SomeDomainEquations/Factoid82/LamConN_atom_con.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConN_atom_con.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConN_atom_empty.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConN_atom_empty.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConN_down_atom.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConN_down_atom.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConN_empty.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConN_empty.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConN_exists_FunCon.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConN_exists_FunCon.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConN_fun_FunCon_right.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConN_fun_FunCon_right.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConN_fun_empty.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConN_fun_empty.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConN_insert_bot.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConN_insert_bot.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConN_mono.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConN_mono.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConN_FunCon_mono_atom.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConN_FunCon_mono_atom.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConN_fun_FunCon_atom.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConN_fun_FunCon_atom.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConN_fun_wf.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConN_fun_wf.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConN_insert_of_ent_atom.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConN_insert_of_ent_atom.lean

InformationSystems/SomeDomainEquations/Factoid82/LamCon_empty.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamCon_empty.lean

InformationSystems/SomeDomainEquations/Factoid82/LamCon_singleton_atom.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamCon_singleton_atom.lean

InformationSystems/SomeDomainEquations/Factoid82/LamCon_singleton_bot.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamCon_singleton_bot.lean

InformationSystems/SomeDomainEquations/Factoid82/LamCon_singleton_funTok.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamCon_singleton_funTok.lean

InformationSystems/SomeDomainEquations/Factoid82/LamCon_subset.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamCon_subset.lean

InformationSystems/SomeDomainEquations/Factoid82/LamEntN_con.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEntN_con.lean

InformationSystems/SomeDomainEquations/Factoid82/LamConN_insert_of_ent_bot.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamConN_insert_of_ent_bot.lean

InformationSystems/SomeDomainEquations/Factoid82/LamEntN_mono.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEntN_mono.lean

InformationSystems/SomeDomainEquations/Factoid82/LamEntN_of_mem.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEntN_of_mem.lean

InformationSystems/SomeDomainEquations/Factoid82/LamEnt_bot.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEnt_bot.lean

InformationSystems/SomeDomainEquations/Factoid82/LamEnt_con.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEnt_con.lean

InformationSystems/SomeDomainEquations/Factoid82/LamEnt_of_mem.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamEnt_of_mem.lean

InformationSystems/SomeDomainEquations/Factoid82/LamTokenEnt_bot.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamTokenEbot.lean

InformationSystems/SomeDomainEquations/Factoid82/lamAtomFinset_funion.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamAtomFifunion.lean

InformationSystems/SomeDomainEquations/Factoid82/lamDForgetFinset_empty.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamDForgeempty.lean

InformationSystems/SomeDomainEquations/Factoid82/LamDCon_empty.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamDCon_empty.lean

InformationSystems/SomeDomainEquations/Factoid82/lamForgetFinset_empty.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamForgetempty.lean

InformationSystems/SomeDomainEquations/Factoid82/LamTokenCon_empty.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamTokenCempty.lean

InformationSystems/SomeDomainEquations/Factoid82/lamRhs_eq_sum_function.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamRhs_eq_sum_function.lean

InformationSystems/SomeDomainEquations/Factoid82.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82.lean

InformationSystems/SomeDomainEquations/DomainEquation.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/DomainEquation.lean

InformationSystems/SomeDomainEquations/Factoid82/lamUnfold_atom.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamUnfoldatom.lean

InformationSystems/SomeDomainEquations/Factoid82/lamUnfold_bot.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamUnfoldbot.lean

InformationSystems/SomeDomainEquations/Factoid82/mem_lamForgetFinset.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/mem_lamForgetFinset.lean

InformationSystems/SomeDomainEquations/Factoid82/LamTokenCon_subset.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamTokenCsubset.lean

InformationSystems/SomeDomainEquations/Factoid82/LamTokenEnt_of_mem.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamTokenEof_mem.lean

InformationSystems/SomeDomainEquations/Factoid82/lamForgetFinset_insert.lean

Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamForgetinsert.lean

InformationSystems/SomeDomainEquations/Factoid82/lamForgetFinset_singleton.lean

Lean source: `DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lamForget singleton.lean`

InformationSystems/SomeDomainEquations/Factoid82/LamCon_of_forget_singleton.lean

Lean source: `DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamCon_ of_forget_singleton.lean`

InformationSystems/SomeDomainEquations/Factoid82/LamTokenCon_singleton.lean

Lean source: `DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/LamTokenC singleton.lean`

InformationSystems/SomeDomainEquations/Factoid82/lambdaSystem_con_axioms.lean

Lean source: `DomainTheory/InformationSystems/SomeDomainEquations/Factoid82/lambdaSys con_axioms.lean`

4.10.3 AI: AI-Lean to AI-English

4.10.4 AI: AI-English to Human-English Concordance

4.11 Factoid 8.3

4.11.1 Human-English

A universal domain. As a final example of building up domains recursively, we give a construction of a "universal" domain U. (The reason for the name will be explained presently.) The best way to define U seems to be to define a domain V with a top element first, and then to remove the top.

The recursion for V is remarkably simple. We begin with two distinct objects Δ and ∇ that give information about the bottom and top of V, respectively. Thus, $\Delta_V = \Delta$ by definition. We assume that these two special data objects are "atomic" in the sense that they are not equal to any ordered pair of objects. For the definition of D_V we have these clauses:

(1) $\Delta, \nabla \in D_V$;

(2) $(X, \Delta) \in D_V$ and $(\Delta, Y) \in D_V$ whenever $X, Y \in D_V$.

In other words, we begin with two objects and close up under two flavors of copies of these objects. (A product result is involved here, so that is the reason for structuring the flavors the way we have.)

For V all subsets of D_V are consistent, so all we have left is to define entailment for this domain. The clauses are:

(3) $u \vdash_V \Delta$ always;

(4) $u \vdash_V \nabla$ whenever either $\nabla \in u$ or $\{X \mid (X, \Delta) \in u\} \vdash_V \nabla$ and $\{Y \mid (\Delta, Y) \in u\} \vdash_V \nabla$;

(5) $u \vdash_V (X', \Delta)$ whenever either $\nabla \in u$ or $\{X \mid (X, \Delta) \in u\} \vdash_V X'$; and

(6) $u \vdash_V (\Delta, Y')$ whenever either $\nabla \in u$ or $\{Y \mid (\Delta, Y) \in u\} \vdash_V Y'$.

The proof that V is an information system proceeds as before. Note that, under the above definition of entailment, the data objects Δ, (Δ, Δ), $((\Delta, \Delta), \Delta)$, etc. are all equivalent. There is, however, no other data object equivalent to ∇. The domain equation satisfied by V is:

$$V \cong V \times V.$$

Of course, there are an unlimited number of solutions to this equation, so the fact that V satisfies it tells us very little.

Because ∇ entails everything, we can regard it as a "rogue" object that ought to be banned from polite company: the only element of V it gives any information about is the top element, which is as unhelpful as any element could be. We should simply throw it out as being "inconsistent." What remains is the domain U. Formally we have:

(7) $D_U = D_V - \{\nabla\}$;

(8) $\Delta_U = \Delta_V$;

(9) $\mathrm{Con}_U = \{u \subseteq D_U \mid u \text{ finite and } u \not\vdash_V \nabla\}$; and

(10) $u \vdash_U Y$ iff $u \in \mathrm{Con}_U$, $Y \in D_U$ and $u \vdash_V Y$. The same style of definition would work in any situation when an information system has a rogue data object that entails everything: there always is a system that results from eliminating all those objects that entail everything. Indeed, we could have always included such an object in any domain and altered the definition to take as elements those deductively closed sets of data objects that *do* not have the rogue object as a member. We did not do this for the reason that superfluous elements cause lots of exceptions in constructs such as product, where there is a temptation to let them enter into various combinations.

Now in U we *do* allow ∇ to enter into combinations—and this is part of the secret of the construction. The consequence is, however, that the domain equation which U satisfies is not too easy to state since it involves an unfamiliar functor. So it is not through such equations that we will understand its nature in a direct way. But it is possible to explain how it works by reference to the steps in the construction.

Imagine the full (infinite) binary tree. The data objects of U are giving information about possible paths in the tree. We think to the tree starting at the root node at the top of the page and growing down. The object Δ gives no information—so no paths are *excluded*. (If we would have allowed ∇, then the information it would have been giving is that all paths are excluded.) The data object (X, Δ) tells us about a path that *either* it is unrestricted on the right half of the tree, *or* on the left, when we start at the node directly below the root, the paths that are excluded from the subtree are those excluded according to X. This makes sense because the subtrees of the binary tree look exactly like the whole tree, so information can be relativized or translated to other positions. With (Δ, Y) the rôles of right and left are interchanged. We could have introduced data objects of the form (X, Y) which tell us information about both halves of the tree at the same time, but the consistent set $\{(X, \Delta), (\Delta, Y)\}$ does the same job. In general consistent sets should be thought of as *conjunctions*; while, in this example, the comma in the ordered pair should be thought of as a *disjunction* when "reading" information objects.

We can now see that a single data object (if it contains ∇) looks down the tree along a finite path to some depth and then *excludes* the rest of the tree below that node. A consistent set of data objects leaves at least one hole, so at least one path is not excluded. The maximal consistent sets of information objects are those giving true information about one single (infinite) path—the total elements of the domain U correspond exactly to the infinite paths in the binary tree. The partial elements are harder to describe geometrically, however. In accumulating information into a consistent set, holes can be left all over the tree. A partial object is therefore of an indeterminate character, since the "path" we are describing might sneak through

any one of the holes. (There is, by the way, a precise topological explanation of what is happening. The total elements of U form a well-known topological space, the so-called Cantor space, and the partially ordered set of elements of U is isomorphic to the lattice of *open* sets of the space—save that the whole space is not allowed.)

This is all very well, but what, we ask, is the good of this domain, and why is it called "universal". The proof cannot be given here, but the result is as follows. As a consequence of standard facts about countable Boolean algebras, it can be proved that every "countably based" domain is a subdomain of U. More specifically, if $\mathbf{A}$ is an information system, and if $D_{\mathbf{A}}$ is countable, then there exists a pair of approximable mappings

$$a : \mathbf{A} \to \mathbf{U} \text{ and } b : \mathbf{U} \to \mathbf{A},$$

such that

$$b \circ a = I_{\mathbf{A}} \text{ and } a \circ b \subseteq I_{\mathbf{U}}.$$

This makes $\mathbf{A}$ a special kind of retract of $\mathbf{U}$. The mappings a and b are far from unique, but at least there is one way to give a one-one embedding of the elements of $\mathbf{A}$ into the elements of $\mathbf{U}$.

The universal property of $\mathbf{U}$ can be applied quite widely. For example, since $(\mathbf{U} \to \mathbf{U})$ is a system with only countably many data objects (by explicit construction!), this system is a retract of $\mathbf{U}$. Fixing on one such retraction pair as above, makes $\mathbf{U}$ also into a model of the λ-calculus. Whether different retractions give essentially different models I do not know. But the point of the remark is to show that domains can contain their own function spaces for a variety of interesting reasons. ?

4.11.2 AI: Human-English to AI-Lean

InformationSystems/SomeDomainEquations/Factoid83/VToken.lean

Lean source: `DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/VToken.le`

InformationSystems/SomeDomainEquations/Factoid83/not_mem_uForget_top.lean

Lean source: `DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/not_mem_uForget_top.lean`

InformationSystems/SomeDomainEquations/Factoid83/UCon_empty.lean

Lean source: `DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/UCon_empty.lean`

InformationSystems/SomeDomainEquations/Factoid83.lean

Lean source: `DomainTheory/InformationSystems/SomeDomainEquations/Factoid83.lean`

InformationSystems/SomeDomainEquations/Factoid83/vPairLFinset.lean

Lean source: `DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vPairLFin`

InformationSystems/SomeDomainEquations/Factoid83/mem_vPairLFinset.lean

Lean source: `DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/mem_vPairLFinset.lean`

InformationSystems/SomeDomainEquations/Factoid83/vPairRFinset.lean

Lean source: `DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vPairRFin`

InformationSystems/SomeDomainEquations/Factoid83/VEnt.lean

Lean source: `DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/VEnt.lean`

InformationSystems/SomeDomainEquations/Factoid83/IsUToken.lean

Lean source: `DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/IsUToken.`

InformationSystems/SomeDomainEquations/Factoid83/BasicInst33.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/BasicInst
InformationSystems/SomeDomainEquations/Factoid83/UToken.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/UToken.le
InformationSystems/SomeDomainEquations/Factoid83/BasicInst35.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/BasicInst
InformationSystems/SomeDomainEquations/Factoid83/VCon.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/VCon.lean
InformationSystems/SomeDomainEquations/Factoid83/mem_vPairRFinset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/mem_vPairRFinset.lean
InformationSystems/SomeDomainEquations/Factoid83/uBot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/uBot.lean
InformationSystems/SomeDomainEquations/Factoid83/uForget.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/uForget.l
InformationSystems/SomeDomainEquations/Factoid83/uForgetInsert.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/uForgetIn
InformationSystems/SomeDomainEquations/Factoid83/BasicInst39.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/BasicInst
InformationSystems/SomeDomainEquations/Factoid83/mem_foldr_uForget.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/mem_foldr_uForget.lean
InformationSystems/SomeDomainEquations/Factoid83/uForgetFinset.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/uForgetFi
InformationSystems/SomeDomainEquations/Factoid83/UCon.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/UCon.lean
InformationSystems/SomeDomainEquations/Factoid83/UEnt.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/UEnt.lean
InformationSystems/SomeDomainEquations/Factoid83/vBot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vBot.lean
InformationSystems/SomeDomainEquations/Factoid83/vPairLFinset_empty.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vPairLFinempty.lean
InformationSystems/SomeDomainEquations/Factoid83/not_VEnt_empty_top.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/not_VEnt_empty_top.lean
InformationSystems/SomeDomainEquations/Factoid83/not_VEnt_singleton_ne_top.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/not_VEnt_singleton_ne_top.lean
InformationSystems/SomeDomainEquations/Factoid83/vPairLFinset_insert_bot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vPairLFininsert_bot.lean
InformationSystems/SomeDomainEquations/Factoid83/vPairLFinset_insert_pairL.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vPairLFininsert_pairL.lean

InformationSystems/SomeDomainEquations/Factoid83/vPairLFinset_insert_pairR.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vPairLFinset_insert_pairR.lean

InformationSystems/SomeDomainEquations/Factoid83/vPairLFinset_mono.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vPairLFinset_mono.lean

InformationSystems/SomeDomainEquations/Factoid83/vPairRFinset_insert_bot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vPairRFinset_insert_bot.lean

InformationSystems/SomeDomainEquations/Factoid83/vPairRFinset_insert_pairL.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vPairRFinset_insert_pairL.lean

InformationSystems/SomeDomainEquations/Factoid83/vPairRFinset_insert_pairR.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vPairRFinset_insert_pairR.lean

InformationSystems/SomeDomainEquations/Factoid83/VEnt_insert_top_imp.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/VEnt_insert_top_imp.lean

InformationSystems/SomeDomainEquations/Factoid83/not_VEnt_insert_top_of_ent.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/not_VEnt_insert_top_of_ent.lean

InformationSystems/SomeDomainEquations/Factoid83/UCon_insert_of_ent.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/UCon_insert_of_ent.lean

InformationSystems/SomeDomainEquations/Factoid83/vPairRFinset_mono.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vPairRFinset_mono.lean

InformationSystems/SomeDomainEquations/Factoid83/VEnt_mono.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/VEnt_mono.lean

InformationSystems/SomeDomainEquations/Factoid83/uSystem.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/uSystem.l

InformationSystems/SomeDomainEquations/Factoid83/vSystem.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vSystem.l

InformationSystems/SomeDomainEquations/Factoid83/vRhs.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vRhs.lean

InformationSystems/SomeDomainEquations/Factoid83/vTop.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vTop.lean

InformationSystems/SomeDomainEquations/Factoid83/vUnfold.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid83/vUnfold.l

4.11.3 AI: AI-Lean to AI-English

4.11.4 AI: AI-English to Human-English Concordance

4.12 Factoid 8.4

4.12.1 Human-English

A domain of domains. Not many details can be presented here, but we would also like to remark that even domains can be made into a domain. One way of getting an idea of how this is possible is to note that since subdomains of $\mathbf{U}$ correspond to certain kinds of functions on $\mathbf{U}$, and since the function space of $\mathbf{U}$ is also a subdomain of $\mathbf{U}$, it might be suspected that the subdomains of $\mathbf{U}$ form a single subdomain of $\mathbf{U}$.

That is a fairly sophisticated way of reaching the conclusion (and many details have to be worked out). A more elementary approach would be just to ask what it means to give a finite amount of information about a domain. For the sake of uniformity, suppose that the data objects of the possible domain are drawn from the non-negative integers, and that we conventionally use 0 for Δ. Then to give a finite amount of information about a domain is—roughly—to specify a finite part of Con and a finite part of $\vdash$. To make the formulation easier, we will reserve for 1 a rôle like the one recently played by ∇. What the specifications will boil down to is pairs (u, v) of finite sets of integers used as data objects to convey one piece of information about an entailment relation.

But hold, entailment relations are very closely connected to approximable mappings. Indeed, we remarked before that the identity function as an approximable mapping on a domain is just represented as the underlying entailment relation itself. Suppose we take as our domain the domain of all sets of integers. It is a powerset, so call it $\mathbf{P}$. That is to say, the integers are the data objects, all finite sets are consistent, and the entailment relation is the minimal possible one. (As far as elements go, an arbitrary set of integers is equal to the union of all its finite subsets, which means that the elements of the domain are in a one-one correspondence with the arbitrary sets of integers.) The question is: which approximable mappings on $\mathbf{P}$ into itself correspond to entailment relations on the integers as data objects?

The answer can be expressed most succinctly using our standard notation. If we think of $r : \mathbf{P} \to \mathbf{P}$ as a relation between finite sets in the usual way, then to say that r is reflexive is to say:

(1) $I_{\mathbf{P}} \subseteq r$.

To say that r is transitive is to say:

(2) $r \circ r = r$. To say that for r the object 0 plays at being Δ is to say:

$$(3) \quad \bar{0} \subseteq r(\bot),$$

where in general $\bar{n}$ is short for $\{n\}$ in the domain $\mathbf{P}$. Then, to say that 1 plays at being a rogue object is to say:

$$(4) \quad \top = r(\bar{1}).$$

Finally, to say that 1 is an inconsistent object that has to be excluded is to say:

$$(5) \quad \bar{1} \not\subseteq r(\bar{0}).$$

That's it. The collection of approximable mappings satisfying (1)–(5) gives us all the entailment relations we need. Condition (5) is a consistency condition, and for r the consistent finite sets u are those such that $\bar{1} \not\subseteq r(\bar{u})$. What we are asserting is that the totality of r satisfying (1)–(5) forms the elements of a domain—one that has been derived from $(\mathbf{P} \to \mathbf{P})$ in a way similar to the way we derived $\mathbf{U}$ from $\mathbf{V}$ above.

Having made domains into a domain, the next step is to see how constructs on domain (i.e. functors) can be made into approximable mappings. But the retelling and development of that story will have to wait for another publication along with the very interesting chapter on powerdomains. I only hope the ground covered here makes the theory of domains seem more elementary and more natural. ?

4.12.2 AI: Human-English to AI-Lean

InformationSystems/SomeDomainEquations/Factoid84/PEnt.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/PEnt.lean
InformationSystems/SomeDomainEquations/Factoid84/P.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/P.lean
InformationSystems/SomeDomainEquations/Factoid84/IdemApprox.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/IdemAppro
InformationSystems/SomeDomainEquations/Factoid84/ReflApprox.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/ReflAppro
InformationSystems/SomeDomainEquations/Factoid84/bar.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/bar.lean
InformationSystems/SomeDomainEquations/Factoid84/barElement.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/barElemen
InformationSystems/SomeDomainEquations/Factoid84/ConsistentApprox.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/Consisten
InformationSystems/SomeDomainEquations/Factoid84/botElement.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/botElemen
InformationSystems/SomeDomainEquations/Factoid84/BotApprox.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/BotApprox
InformationSystems/SomeDomainEquations/Factoid84/mem_botElement.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/mem_botElement.lean
InformationSystems/SomeDomainEquations/Factoid84/barElement_zero_eq_bot.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/barElemen zero_eq_bot.lean
InformationSystems/SomeDomainEquations/Factoid84/not_RogueApprox_idMap.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/not_RogueApprox_idMap.lean
InformationSystems/SomeDomainEquations/Factoid84.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84.lean
InformationSystems/SomeDomainEquations/Factoid84/scottCon_empty_iff_consistent.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/scottCon_empty_iff_consistent.lean
InformationSystems/SomeDomainEquations/Factoid84/topElement.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/topElemen

InformationSystems/SomeDomainEquations/Factoid84/RogueApprox.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/RogueAppr
InformationSystems/SomeDomainEquations/Factoid84/IsDomainApprox.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/IsDomainA
InformationSystems/SomeDomainEquations/Factoid84/DomainApprox.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/DomainApp
InformationSystems/SomeDomainEquations/Factoid84/flatRel.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/flatRel.l
InformationSystems/SomeDomainEquations/Factoid84/flatMap.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/flatMap.l
InformationSystems/SomeDomainEquations/Factoid84/mem_barElement.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/mem_barElement.lean
InformationSystems/SomeDomainEquations/Factoid84/BotApprox_any.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/BotApproxany.lean
InformationSystems/SomeDomainEquations/Factoid84/mem_topElement.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/mem_topElement.lean
InformationSystems/SomeDomainEquations/Factoid84/flatDomainApprox.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/flatDomai
InformationSystems/SomeDomainEquations/Factoid84/scottCon.lean
Lean source: DomainTheory/InformationSystems/SomeDomainEquations/Factoid84/scottCon.

4.12.3 AI: AI-Lean to AI-English

4.12.4 AI: AI-English to Human-English Concordance

5 Equivalence of Scott's Three Presentations of Domain Theory

Dana Scott developed three presentations of the same class of domains: **continuous lattices** (1972), **neighbourhood systems** (PRG-19 / 1980–81), and **information systems** (1982). In this chapter we supply **bridge theorems**: order isomorphisms and constructivity audits showing that the three presentations determine the same domains (up to isomorphism), including products, separated sums, and function spaces at the information-system level, with a transport of 1972 Scott maps along the round presentation.

The Lean development is sorry-free. The continuous-lattice identification `D ≃o RoundFilter` audits to `{propext, Quot.sound}`. Every InfoSys-facing declaration inherits `Classical.choice` from Mathlib 4.33's `Finset` instances, even when the proof term extracts no witness. Genuine classical frontiers remain Scott's 1972 topological definition of $\ll$ (algebraic $\Rightarrow$ continuous; ScottMap conjugation) and trichotomy for separated sums.

Dependencies. Each box is one folder. BridgeTheorems is the Lean files in that folder, not in a subfolder. The arrowhead points at the folder that imports, and the number is how many direct imports. A pair of arrows between the same boxes is a cycle.

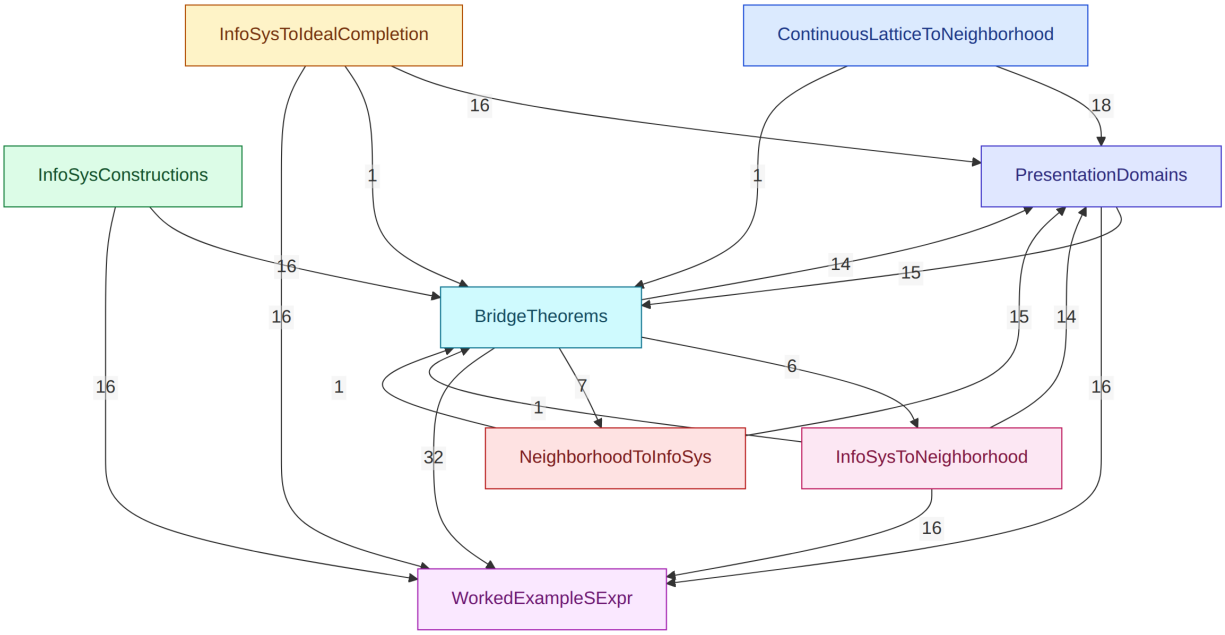


Figure 31: Some domain equations.

5.1 Introduction

Neighbourhood systems and information systems are equivalent in a precise sense. The mathematical folklore is stronger still: all three presentations carve out the same class of domains, related by ideal completion and the Scott topology. That equivalence is already known; this article is the write-up of a machine-checked proof of the named bridges, not a first presentation of the result. The three presentations were formalized in separate libraries; the maps between them are the content of this package.

We do **not** re-prove Scott's internal theorems; we import the finished sibling packages and build cross-presentation maps:

Presentation	Lean package	Characteristic object
Continuous lattices **[Sco72]**	`scott1972`	`ContinuousLattice D`, way-below $\ll$, `ScottMap`
Neighbourhood systems **[Sco81]**	`scott1980`	`NeighborhoodSystem`, filters as domain elements
Information systems **[Sco82]**	`scott1982`	`InfoSys`, elements as consistent closed token sets

The main subtlety is that a naïve reading of "domains = filters of neighbourhoods" overstates the continuous-lattice corner: for a continuous lattice `D`, the filter `{⇑a | a ≤ x}` has retract `x` but properly contains the principal round filter `{⇑a | a ≪ x}`. The correct identification is **`D ≃o RoundFilter`**, not raw $|\mathcal{D}|$.

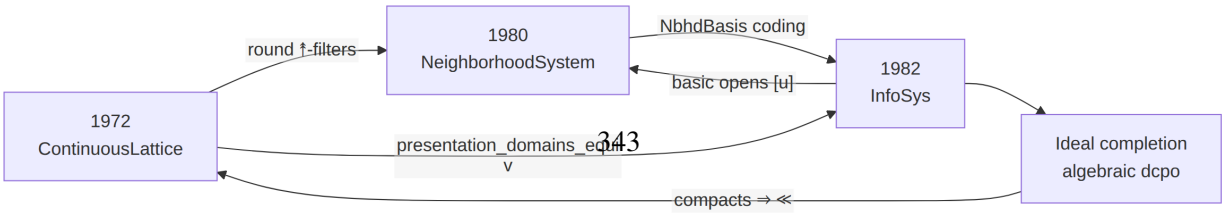


Figure 32: Equivalence of Scott's Three Presentations of Domain Theory.

We prove **order isomorphisms of domains** (and of the named construction objects), not a 2-categorical

Theorem	Direction	Lean module	Scope
`continuousLattice_to_neighborhoodSystem`	1972 → 1980	`ContinuousLatticeToNeighborhood.lean`	library
`neighborhoodSystem_to_infoSys`	1980 → 1982	`NeighborhoodToInfoSys.lean`	compared
`infoSys_to_neighborhoodSystem`	1982 → 1980	`InfoSysToNeighborhood.lean`	compared
`infoSys_to_idealCompletion`	1982 → algebraic	`InfoSysToIdealCompletion.lean`	library
`idealCompletion_to_continuousLattice`	algebraic → 1972	`IdealCompletionToContinuousLattice.lean`	library
`presentation_domains_equiv`	three-way	`PresentationDomains.lean`	compared
`infoSys_constructions_equiv`	constructions	`InfoSysConstructions.lean`, `ScottMapBridge.lean`	library
`sexNeighborhoodIso` / `sexIdealIso` / `sexDomainEquationIso`	S-expression instance	`WorkedExampleSExpr.lean`, `SexDomainEquation.lean`	compared

The sibling packages are **finished dependencies**, not work items of this paper: `scott1972`, `scott1980`, and `scott1982` (information systems through Factoid 8.4 / domain equations). They are vendored in `vendor/` at frozen SHAs (see `vendor/FROZEN.txt` / `lakefile.toml`), with the local modifications recorded there and in `formalization.yaml`; the remotes remain the per-paper homes. The compared family (Palomar `Challenge.lean` / `comparator.json`) is the 1980 ↔ 1982 coding, the round three-way identification, and the Factoid 8.1 instance; the other catalog rows are proved in `ScottModels/` but are not Comparator targets. This package was verified and registered in the Palomar registry as PALOMAR-2026-08-25-000003 v1 **[PALOMAR26]**. What Palomar verified is the claim:

> Order isomorphisms relating Scott's three presentations of domains — continuous lattices (1972), neighbourhood systems (PRG-19), and information systems (1982) — including the round identification `D ≃o RoundFilter ≃o RoundInfoSysElement` and the S-expression equation `T ≅ A + (T × T)` as `|T| ≃o |A + (T × T)|` (`SexSys.Element ≃o SexRhs.Element`).

This document (`view.pdf`) is the narrative account, not a formalization of the three papers. The module map below is left-to-right: sibling packages on the left, local `ScottModels/` modules on the right, with arrows for **direct** imports (transitive imports inside the siblings are omitted). `Equivalence` re-exports the bridges; only the `ScottMapBridge → Equivalence` edge is drawn to avoid clutter. Root `ScottModels.lean` also opens 1972 `ContinuousLattice.Specialization`, 1980 `Neighborhood.Basic`, and 1982 `InfoSys`.

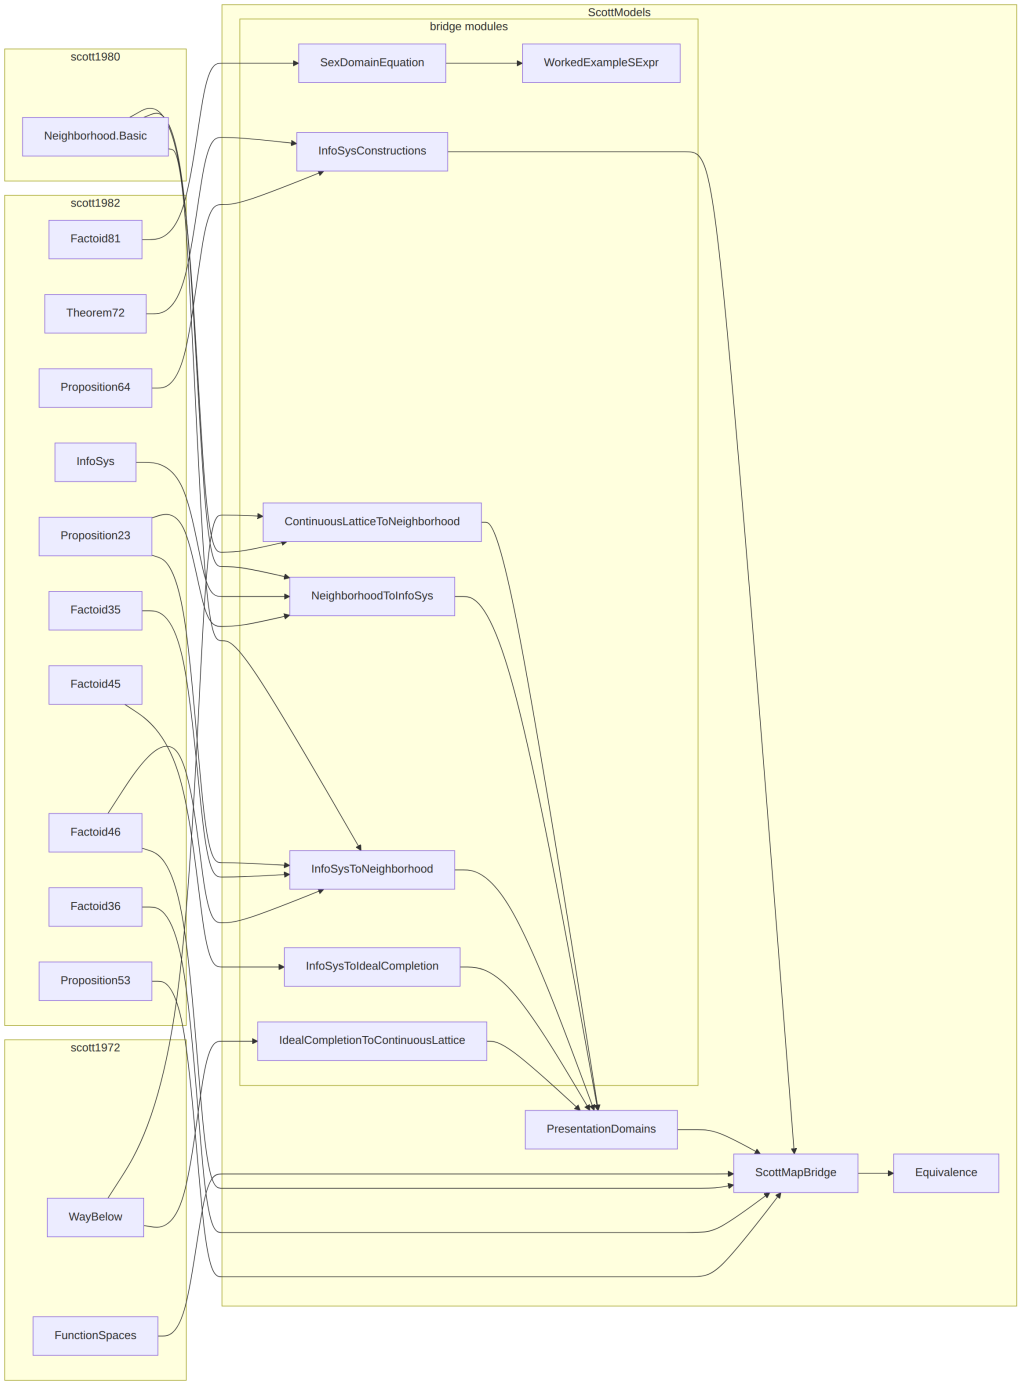


Figure 33: Introduction.

5.3 Proof notes

5.3.1 Human-English

Continuous lattices → neighbourhood systems **Claim.** For a continuous lattice `D`, the sets `⇑a = {z | a ≪ z}` form a `NeighborhoodSystem` on token type `D`, and under `ContinuousLattice` one has an order isomorphism `D ≃o RoundFilter`.

Construction. `wayBelowUp a` is upward closed; `⇑⊥ = univ`; `⇑a ∩ ⇑b = ⇑(a ⊔ b)` (interpolation / directedness of way-below). Principal filters `toFilter x = {⇑a | a ≪ x}` are round: membership of `⇑a` yields, by interpolation in a continuous lattice, some `b` with `a ≪ b ≪ x`, hence `⇑b ∈ toFilter x`.

Why raw `|𝒟|` fails. The larger filter `{⇑a | a ≤ x}` still has `ofFilter = x` (supremum of codes), but is not equal to `toFilter x` whenever there are elements way-below strictly below `x`. Roundness (`⇑a ∈ f ⇒ ∃ b, a ≪ b ∧ ⇑b ∈ f`) cuts exactly to the image of `toFilter`.

Axioms. `domainOrderIso : D ≃o RoundFilter` audits to `{propext, Quot.sound}`.

Neighbourhood systems → information systems **Claim.** A neighbourhood system equipped with a decidable exhaustive coding `NbhdBasis ι α` of its neighbourhood family $\mathcal{D}$ induces an `InfoSys` on tokens ι with $|\mathcal{D}|$ `≃o` the InfoSys domain.

Construction. Tokens are neighbourhood indices. Consistency of a finite `u ⊆ ι` is membership of $\bigcap_{\texttt{i∈u}}$ `nbhd i` in $\mathcal{D}$ (empty intersection = master set Δ). Entailment `u ⊢ j` means the intersection is a neighbourhood contained in `nbhd j`. Filters of the neighbourhood system correspond to InfoSys elements via the coding.

Constructivity. `DecidableEq ι` is required so `InfoSys` can use the choice-free `Finset` prelude from `scott1982`. The proof of `ent_con` avoids classical `by_cases` / `em`. The maps extract no witnesses; the kernel audit still reports inherited `Classical.choice` from the Mathlib 4.33 `Finset` instance frontier (§4).

Information systems → neighbourhood systems **Claim.** For an information system `A`, the basic opens `[u] = {x ∈ |A| | ↑u ⊆ x}` (`u ∈ Con`) form a `NeighborhoodSystem` on `|A|`, and filters recover elements: `|A| ≃o` the filter domain.

Proof note. Scott's Factoid 4.6 supplies the basic-open vocabulary. The Lean proof initially pulled `Classical.choice` through `simp` on `basicOpen_empty` / finset unions; those simps were removed so the construction extracts no witnesses. The kernel audit still reports inherited `Classical.choice` through `InfoSys`/`Finset` (§4). Together with §3.2 this is the **1980 ↔ 1982** equivalence under coding.

Information systems → ideal completion **Claim.** `|A| ≃o Ideal (FiniteElement A)`, where finite elements are closures $\bar{u}$ of consistent finsets (`Factoid 3.5`).

Construction. `toIdeal x` is the ideal of finite approximants of `x`; `ofIdeal` takes directed suprema of finite elements (1982 Factoids 4.4–4.5: `directedSup`, `eq_directedSup_finiteApproximants`, `compact_closure`). The maps extract no witnesses; the kernel audit inherits `Classical.choice` through `InfoSys`/`Finset` (§4).

Algebraic complete lattices → continuous lattices **Claim.** If every element of a complete lattice is the directed supremum of compact elements below it (`AlgebraicLattice`), then `ContinuousLattice` holds.

Proof note. Order-theoretic compactness implies `Set.Ici k` is Scott-open, hence $k \ll y$ whenever $k \le y$. Algebraicity then yields $y = \bigsqcup\{k \text{ compact} \mid k \le y\} \subseteq \bigsqcup\{x \mid x \ll y\}$. This is the **classical frontier**: Scott's $\ll$ is defined topologically in `scott1972`, so the footprint inherits that classicality even though the order argument is elementary.

Three-presentation equivalence (`presentation_domains_equiv`) **Claim.** Under `ContinuousLattice D` and `DecidableEq D`,

```
D ?o RoundFilter ?o RoundInfoSysElement
```

where `RoundInfoSysElement` is the subtype of elements of the InfoSys coded by `wayBelowNbhdBasis` (tokens = elements of `D`, neighbourhoods = $\Uparrow$`a`) that correspond to round filters. An extended form routes through the ideal-completion subtype.

Glue. `wayBelowNbhdBasis` packages the $\Uparrow$-system as an `NbhdBasis`; `roundFilter_infoSys_iso` transports roundness along `NbhdBasis.domainOrderIso`; `presentation_domains_equiv` is the composite with `continuousLattice_roundFilter_iso`.

What is not claimed. Raw $|\mathcal{D}|$ and the full InfoSys domain `|A|` remain properly larger than `D`. The equivalence is on the **round** corner that matches continuous lattice points.

Axioms. Under Mathlib 4.33 the kernel audit includes `{propext, Classical.choice, Quot.sound}` through the inherited InfoSys/`Finset` instance frontier described in §4; the round-filter construction itself performs no choice-based witness extraction.

Constructions (`infoSys_constructions_equiv`)

Products `|A| × |B| ≃o |A × B|` via 1982 `pairElements` / `fstMap` / `sndMap` (Prop 6.2). The maps use explicit projections and assembly, with no witness selection.

Separated sums `WithBot (|A| ⊕ |B|) ≃o |A + B|` via `inl` / `inr` classify-and-assemble (Prop 6.4). Trichotomy on token polarity uses classical case-split (`Classical.choice` in the footprint).

Function spaces `ApproximableMap A B ≃o |A → B|` packages Theorem 7.2 (`approxMap_toElement` / `element_toApproxMap`) with pointwise `Le` as `PartialOrder`. No additional choice is used beyond the inherited InfoSys/`Finset` instance frontier.

Factoid 4.6 bridge `ApproximableMap A B ≃o ScottContinuous A B` via `toScottContinuous` / `ofScottContinuous`, using Prop 5.3(v) (`rel_iff_closure_le`) and `closure_le_element` for the round-trip on relations. The relation-level proof performs no witness extraction; its kernel audit inherits the InfoSys/`Finset` frontier in §4.

ScottMap conjugation A 1972 `ScottMap D E` conjugates along any pair of order isomorphisms `ιD : D ≃o D'`, `ιE : E ≃o E'` to a pointwise-ordered map `D' → E'`. Specializing to `continuousLattice_roundFilter_iso` / `presentation_domains_equiv` yields `scottMap_roundFilter_iso` and `scottMap_roundInfoSys_iso`. The conjugation itself is order-theoretic; the footprint includes `Classical.choice` because `ScottMap` is defined via Scott continuity in `scott1972`.

Out of scope (documented). Identifying `ApproximableMap` on the coded ⇑-InfoSys with `ScottMap D E` (needs roundness preservation of approximable maps), and relating `wayBelow(D × E)` to the InfoSys product of factors (cylinder basis).

5.3.2 AI: Human-English to AI-Lean

BridgeTheorems/ConjScottMap.lean
Lean source: `DomainTheory/BridgeTheorems/ConjScottMap.lean`
BridgeTheorems/ContinuousLatticeToNeighborhood/wayBelowUp.lean
Lean source: `DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/wayBelowUp.`
BridgeTheorems/ContinuousLatticeToNeighborhood/wayBelowUp_anti.lean
Lean source: `DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/wayBelowUp_anti.lean`
BridgeTheorems/ContinuousLatticeToNeighborhood/wayBelowUp_bot.lean
Lean source: `DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/wayBelowUp_bot.lean`
BridgeTheorems/ContinuousLatticeToNeighborhood/wayBelowUp_inter.lean
Lean source: `DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/wayBelowUp_inter.lean`
BridgeTheorems/ContinuousLatticeToNeighborhood/toNeighborhoodSystem.lean
Lean source: `DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/toNeighborh`
BridgeTheorems/ContinuousLatticeToNeighborhood/Filter.lean
Lean source: `DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/Filter.lean`
BridgeTheorems/ContinuousLatticeToNeighborhood/Round.lean
Lean source: `DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/Round.lean`
BridgeTheorems/ContinuousLatticeToNeighborhood/RoundFilter.lean
Lean source: `DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/RoundFilter`
BridgeTheorems/ContinuousLatticeToNeighborhood/codes.lean
Lean source: `DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/codes.lean`
BridgeTheorems/ContinuousLatticeToNeighborhood/bot_mem_codes.lean
Lean source: `DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/bot_mem_codes.lean`
BridgeTheorems/ContinuousLatticeToNeighborhood/codes_directed.lean
Lean source: `DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/codes_directed.lean`
BridgeTheorems/ContinuousLatticeToNeighborhood/codes_nonempty.lean
Lean source: `DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/codes_nonempty.lean`
BridgeTheorems/ContinuousLatticeToNeighborhood/ofFilter.lean
Lean source: `DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/ofFilter.le`
BridgeTheorems/ContinuousLatticeToNeighborhood/mem_wayBelowUp_ofFilter_of_round.lean
Lean source: `DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/mem_wayBelowUp_ofFilter_of_round.lean`
BridgeTheorems/ContinuousLatticeToNeighborhood/toFilter.lean
Lean source: `DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/toFilter.le`
BridgeTheorems/ContinuousLatticeToNeighborhood/mem_wayBelowUp_toFilter.lean

Lean source: DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/mem_wayBelowUp_toFilter.lean

BridgeTheorems/ContinuousLatticeToNeighborhood/ofFilter_toFilter.lean

Lean source: DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/ofFilter_toFilter.lean

BridgeTheorems/ContinuousLatticeToNeighborhood/toFilter_isRound.lean

Lean source: DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/toFilter_isRound.lean

BridgeTheorems/ContinuousLatticeToNeighborhood/toFilter_mono.lean

Lean source: DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/toFilter_mono.lean

BridgeTheorems/ContinuousLatticeToNeighborhood/domainEmbedding.lean

Lean source: DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/domainEmbed

BridgeTheorems/ContinuousLatticeToNeighborhood/toFilter_ofFilter.lean

Lean source: DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/toFilter_ofFilter.lean

BridgeTheorems/ContinuousLatticeToNeighborhood/domainOrderIso.lean

Lean source: DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/domainOrder

BridgeTheorems/ContinuousLatticeToNeighborhood/Basic.lean

Lean source: DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/Basic.lean

BridgeTheorems/ContinuousLatticeToNeighborhood/codes_lower.lean

Lean source: DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/codes_lower.lean

BridgeTheorems/ContinuousLatticeToNeighborhood/mem_codes_iff.lean

Lean source: DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood/mem_codes_iff.lean

BridgeTheorems/ContinuousLatticeToNeighborhood.lean

Lean source: DomainTheory/BridgeTheorems/ContinuousLatticeToNeighborhood.lean

BridgeTheorems/InfoSysConstructions/assembleSum.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/assembleSum.lean

BridgeTheorems/InfoSysConstructions/assembleSum_mono.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/assembleSum_mono.lean

BridgeTheorems/InfoSysConstructions/instPartialOrderApproximableMap.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/instPartialOrderApprox

BridgeTheorems/InfoSysConstructions/approxMap_toElement_le_iff.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/approxMap_toElement_le_iff.lean

BridgeTheorems/InfoSysConstructions/functionSpaceDomainIso.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/functionSpaceDomainIso

BridgeTheorems/InfoSysConstructions/lftFinset_singleton_right.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/lftFinset_singleton_right.lean

BridgeTheorems/InfoSysConstructions/not_left_mem_sum_botElement.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/not_left_mem_sum_botElement.lean

BridgeTheorems/InfoSysConstructions/not_right_mem_sum_botElement.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/not_right_mem_sum_botElement.lean

BridgeTheorems/InfoSysConstructions/pairElements_mono.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/pairElements_mono.lean

BridgeTheorems/InfoSysConstructions/pairElements_unpair.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/pairElements_unpair.lean

BridgeTheorems/InfoSysConstructions/rhtFinset_singleton_left.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/rhtFinset_singleton_left.lean

BridgeTheorems/InfoSysConstructions/left_bot_mem_inlMap_toElement.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/left_bot_mem_inlMap_toElement.lean

BridgeTheorems/InfoSysConstructions/right_bot_mem_inrMap_toElement.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/right_bot_mem_inrMap_toElement.lean

BridgeTheorems/InfoSysConstructions/sumElementLft_inlMap_toElement.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/sumElementLft_inlMap_toElement.lean

BridgeTheorems/InfoSysConstructions/inlMap_toElement_injective.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/inlMap_toElement_injective.lean

BridgeTheorems/InfoSysConstructions/inlMap_toElement_le_iff.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/inlMap_toElement_le_iff.lean

BridgeTheorems/InfoSysConstructions/sumElementRht_inrMap_toElement.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/sumElementRht_inrMap_toElement.lean

BridgeTheorems/InfoSysConstructions/inrMap_toElement_injective.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/inrMap_toElement_injective.lean

BridgeTheorems/InfoSysConstructions/assembleSum_injective.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/assembleSum_injective.lean

BridgeTheorems/InfoSysConstructions/inrMap_toElement_le_iff.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/inrMap_toElement_le_iff.lean

BridgeTheorems/InfoSysConstructions/sum_element_trichotomy.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/sum_element_trichotomy.lean

BridgeTheorems/InfoSysConstructions/exists_assembleSum_eq.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/exists_assembleSum_eq.lean

BridgeTheorems/InfoSysConstructions/classifySum.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/classifySum.lean

BridgeTheorems/InfoSysConstructions/assembleSum_classifySum.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/assembleSum_classifySum.lean

BridgeTheorems/InfoSysConstructions/classifySum_assembleSum.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/classifySum_assembleSum.lean

BridgeTheorems/InfoSysConstructions/sumDomainIso.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/sumDomainIso.lean

BridgeTheorems/InfoSysConstructions/unpair.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/unpair.lean

BridgeTheorems/InfoSysConstructions/unpair_pairElements.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/unpair_pairElements.lean

BridgeTheorems/InfoSysConstructions/productDomainIso.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/productDomainIso.lean

BridgeTheorems/InfoSysConstructions/Basic.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/Basic.lean

BridgeTheorems/InfoSysConstructions/sumElementLft_eq.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/sumElementLft_eq.lean

BridgeTheorems/InfoSysConstructions/sumElementRht_eq.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/sumElementRht_eq.lean

BridgeTheorems/InfoSysConstructions/unpair_mono.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions/unpair_mono.lean

BridgeTheorems/InfoSysConstructions.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysConstructions.lean

BridgeTheorems/InfoSysToIdealCompletion/FiniteElement.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/FiniteElement.lean

BridgeTheorems/InfoSysToIdealCompletion/finiteApproximants.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/finiteApproximants

BridgeTheorems/InfoSysToIdealCompletion/directed_finiteApproximants.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/directed_finiteApproximants.lean

BridgeTheorems/InfoSysToIdealCompletion/idealCarrier.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/idealCarrier.lean

BridgeTheorems/InfoSysToIdealCompletion/directed_idealCarrier.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/directed_idealCarrier.lean

BridgeTheorems/InfoSysToIdealCompletion/isFinite_bot.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/isFinite_bot.lean

BridgeTheorems/InfoSysToIdealCompletion/botFinite.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/botFinite.lean

BridgeTheorems/InfoSysToIdealCompletion/le_of_mem_finiteApproximants.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/le_of_mem_finiteApproximants.lean

BridgeTheorems/InfoSysToIdealCompletion/mem_finiteApproximants_of_le.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/mem_finiteApproximants_of_le.lean

BridgeTheorems/InfoSysToIdealCompletion/isLowerSet_finiteApproximants.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/isLowerSet_finiteApproximants.lean

BridgeTheorems/InfoSysToIdealCompletion/nonempty_finiteApproximants.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/nonempty_finiteApproximants.lean

BridgeTheorems/InfoSysToIdealCompletion/nonempty_idealCarrier.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/nonempty_idealCarrier.lean

BridgeTheorems/InfoSysToIdealCompletion/ofIdeal.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/ofIdeal.lean

BridgeTheorems/InfoSysToIdealCompletion/le_ofIdeal_of_mem.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/le_ofIdeal_of_mem.lean

BridgeTheorems/InfoSysToIdealCompletion/toIdeal.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/toIdeal.lean

BridgeTheorems/InfoSysToIdealCompletion/ofIdeal_toIdeal.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/ofIdeal_toIdeal.lean

BridgeTheorems/InfoSysToIdealCompletion/toIdeal_mono.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/toIdeal_mono.lean

BridgeTheorems/InfoSysToIdealCompletion/toIdeal_ofIdeal.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/toIdeal_ofIdeal.lean

BridgeTheorems/InfoSysToIdealCompletion/domainOrderIso.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/domainOrderIso.lea

BridgeTheorems/InfoSysToIdealCompletion/Basic.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/Basic.lean

BridgeTheorems/InfoSysToIdealCompletion/mem_finiteApproximants_iff.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/mem_finiteApproximants_iff.lean

BridgeTheorems/InfoSysToIdealCompletion/mem_toIdeal_iff.lean

Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion/mem_toIdeal_iff.lean

BridgeTheorems/InfoSysToIdealCompletion.lean
Lean source: DomainTheory/BridgeTheorems/InfoSysToIdealCompletion.lean
BridgeTheorems/IsCompactElement.lean
Lean source: DomainTheory/BridgeTheorems/IsCompactElement.lean
BridgeTheorems/AlgebraicLattice.lean
Lean source: DomainTheory/BridgeTheorems/AlgebraicLattice.lean
BridgeTheorems/IdealCompletionToContinuousLattice.lean
Lean source: DomainTheory/BridgeTheorems/IdealCompletionToContinuousLattice.lean
BridgeTheorems/NbhdBasis.lean
Lean source: DomainTheory/BridgeTheorems/NbhdBasis.lean
BridgeTheorems/basicOpen_empty.lean
Lean source: DomainTheory/BridgeTheorems/basicOpen_empty.lean
BridgeTheorems/ent_of_basicOpen_subset.lean
Lean source: DomainTheory/BridgeTheorems/ent_of_basicOpen_subset.lean
BridgeTheorems/con_of_basicOpen_subset.lean
Lean source: DomainTheory/BridgeTheorems/con_of_basicOpen_subset.lean
BridgeTheorems/funion_singleton_eq_insert.lean
Lean source: DomainTheory/BridgeTheorems/funion_singleton_eq_insert.lean
BridgeTheorems/basicOpen_singleton_inter.lean
Lean source: DomainTheory/BridgeTheorems/basicOpen_singleton_inter.lean
BridgeTheorems/interOf.lean
Lean source: DomainTheory/BridgeTheorems/interOf.lean
BridgeTheorems/interOf_empty.lean
Lean source: DomainTheory/BridgeTheorems/interOf_empty.lean
BridgeTheorems/interOf_insert.lean
Lean source: DomainTheory/BridgeTheorems/interOf_insert.lean
BridgeTheorems/filter_mem_interOf.lean
Lean source: DomainTheory/BridgeTheorems/filter_mem_interOf.lean
BridgeTheorems/interOf_mem_of_lower_bound.lean
Lean source: DomainTheory/BridgeTheorems/interOf_mem_of_lower_bound.lean
BridgeTheorems/mem_basicOpen_singleton.lean
Lean source: DomainTheory/BridgeTheorems/mem_basicOpen_singleton.lean
BridgeTheorems/mem_interOf.lean
Lean source: DomainTheory/BridgeTheorems/mem_interOf.lean
BridgeTheorems/interOf_anti.lean
Lean source: DomainTheory/BridgeTheorems/interOf_anti.lean
BridgeTheorems/interOf_subset_master.lean
Lean source: DomainTheory/BridgeTheorems/interOf_subset_master.lean
BridgeTheorems/interOf_subset_nbhd.lean
Lean source: DomainTheory/BridgeTheorems/interOf_subset_nbhd.lean
BridgeTheorems/nbhd_subset_master.lean
Lean source: DomainTheory/BridgeTheorems/nbhd_subset_master.lean
BridgeTheorems/interOf_singleton.lean
Lean source: DomainTheory/BridgeTheorems/interOf_singleton.lean
BridgeTheorems/scottContinuous_ext.lean

Lean source: DomainTheory/BridgeTheorems/scottContinuous_ext.lean

BridgeTheorems/ScottMapBridgeInst9.lean

Lean source: DomainTheory/BridgeTheorems/ScottMapBridgeInst9.lean

BridgeTheorems/conjScottMapFun.lean

Lean source: DomainTheory/BridgeTheorems/conjScottMapFun.lean

BridgeTheorems/ScottMapBridgeInst19.lean

Lean source: DomainTheory/BridgeTheorems/ScottMapBridgeInst19.lean

BridgeTheorems/conjScottMapFun_le_iff.lean

Lean source: DomainTheory/BridgeTheorems/conjScottMapFun_le_iff.lean

BridgeTheorems/ext.lean

Lean source: DomainTheory/BridgeTheorems/ext.lean

BridgeTheorems/ScottMapBridgeInst21.lean

Lean source: DomainTheory/BridgeTheorems/ScottMapBridgeInst21.lean

BridgeTheorems/ofScottContinuous_toScottContinuous.lean

Lean source: DomainTheory/BridgeTheorems/ofScottContinuous_toScottContinuous.lean

BridgeTheorems/orderIso.lean

Lean source: DomainTheory/BridgeTheorems/orderIso.lean

BridgeTheorems/toInfoSys.lean

Lean source: DomainTheory/BridgeTheorems/toInfoSys.lean

BridgeTheorems/ofElement.lean

Lean source: DomainTheory/BridgeTheorems/ofElement.lean

BridgeTheorems/ofElement_mem.lean

Lean source: DomainTheory/BridgeTheorems/ofElement_mem.lean

BridgeTheorems/toElement.lean

Lean source: DomainTheory/BridgeTheorems/toElement.lean

BridgeTheorems/ofElement_toElement.lean

Lean source: DomainTheory/BridgeTheorems/ofElement_toElement.lean

BridgeTheorems/toElement_carrier.lean

Lean source: DomainTheory/BridgeTheorems/toElement_carrier.lean

BridgeTheorems/toElement_ofElement.lean

Lean source: DomainTheory/BridgeTheorems/toElement_ofElement.lean

BridgeTheorems/NeighborhoodToInfoSys/domainOrderIso.lean

Lean source: DomainTheory/BridgeTheorems/NeighborhoodToInfoSys/domainOrderIso.lean

BridgeTheorems/NeighborhoodToInfoSys.lean

Lean source: DomainTheory/BridgeTheorems/NeighborhoodToInfoSys.lean

BridgeTheorems/toNeighborhoodSystem.lean

Lean source: DomainTheory/BridgeTheorems/toNeighborhoodSystem.lean

BridgeTheorems/mem_basicOpen_of_singletons.lean

Lean source: DomainTheory/BridgeTheorems/mem_basicOpen_of_singletons.lean

BridgeTheorems/ofFilter.lean

Lean source: DomainTheory/BridgeTheorems/ofFilter.lean

BridgeTheorems/mem_basicOpen_iff.lean

Lean source: DomainTheory/BridgeTheorems/mem_basicOpen_iff.lean

BridgeTheorems/toFilter.lean

Lean source: DomainTheory/BridgeTheorems/toFilter.lean

BridgeTheorems/ofFilter_toFilter.lean
Lean source: DomainTheory/BridgeTheorems/ofFilter_toFilter.lean
BridgeTheorems/toFilter_ofFilter.lean
Lean source: DomainTheory/BridgeTheorems/toFilter_ofFilter.lean
BridgeTheorems/InfoSysToNeighborhood/domainOrderIso.lean
Lean source: DomainTheory/BridgeTheorems/InfoSysToNeighborhood/domainOrderIso.lean
BridgeTheorems/InfoSysToNeighborhood.lean
Lean source: DomainTheory/BridgeTheorems/InfoSysToNeighborhood.lean
BridgeTheorems/PresentationDomains/continuousLattice_roundFilter_iso.lean
Lean source: DomainTheory/BridgeTheorems/PresentationDomains/continuousLattice_roundFilter_iso.lean
BridgeTheorems/PresentationDomains/nbhdBasis_ideal_iso.lean
Lean source: DomainTheory/BridgeTheorems/PresentationDomains/nbhdBasis_ideal_iso.lean
BridgeTheorems/PresentationDomains/neighborhood_ideal_iso.lean
Lean source: DomainTheory/BridgeTheorems/PresentationDomains/neighborhood_ideal_iso.lean
BridgeTheorems/PresentationDomains/wayBelowNbhdBasis.lean
Lean source: DomainTheory/BridgeTheorems/PresentationDomains/wayBelowNbhdBasis.lean
BridgeTheorems/PresentationDomains/IsRoundInfoSysElement.lean
Lean source: DomainTheory/BridgeTheorems/PresentationDomains/IsRoundInfoSysElement.l
BridgeTheorems/PresentationDomains/RoundInfoSysElement.lean
Lean source: DomainTheory/BridgeTheorems/PresentationDomains/RoundInfoSysElement.lea
BridgeTheorems/PresentationDomains/roundFilter_infoSys_iso.lean
Lean source: DomainTheory/BridgeTheorems/PresentationDomains/roundFilter_infoSys_iso.lean
BridgeTheorems/PresentationDomains/continuousLattice_roundInfoSys_iso.lean
Lean source: DomainTheory/BridgeTheorems/PresentationDomains/continuousLattice_roundInfoSys_iso.lean
BridgeTheorems/PresentationDomains/presentation_domains_equiv.lean
Lean source: DomainTheory/BridgeTheorems/PresentationDomains/presentation_domains_equiv.lean
BridgeTheorems/PresentationDomains/roundInfoSys_ideal_iso.lean
Lean source: DomainTheory/BridgeTheorems/PresentationDomains/roundInfoSys_ideal_iso.lean
BridgeTheorems/PresentationDomains/presentation_domains_equiv_ideal.lean
Lean source: DomainTheory/BridgeTheorems/PresentationDomains/presentation_domains_equiv_ideal.lean
BridgeTheorems/PresentationDomains/Basic.lean
Lean source: DomainTheory/BridgeTheorems/PresentationDomains/Basic.lean
BridgeTheorems/PresentationDomains/wayBelowNbhdBasis_system.lean
Lean source: DomainTheory/BridgeTheorems/PresentationDomains/wayBelowNbhdBasis_system.lean
BridgeTheorems/PresentationDomains.lean
Lean source: DomainTheory/BridgeTheorems/PresentationDomains.lean

BridgeTheorems/toScottContinuous_ofScottContinuous.lean
Lean source: DomainTheory/BridgeTheorems/toScottContinuous_ofScottContinuous.lean
BridgeTheorems/approximableMap_scottContinuous_equiv.lean
Lean source: DomainTheory/BridgeTheorems/approximableMap_scottContinuous_equiv.lean
BridgeTheorems/ScottMapBridge.lean
Lean source: DomainTheory/BridgeTheorems/ScottMapBridge.lean
BridgeTheorems/Equivalence.lean
Lean source: DomainTheory/BridgeTheorems/Equivalence.lean

5.3.3 AI: AI-Lean to AI-English

5.3.4 AI: AI-English to Human-English Concordance

5.4 Constructivity summary

Bridge	Footprint	Notes
Nbhd ↔ InfoSys (both directions)	+ inherited `Classical.choice`	Decidable coding; Mathlib 4.33 `Finset` instance frontier
CL ↔ RoundFilter	`{propext, Quot.sound}`	Roundness is order-theoretic
InfoSys ↔ Ideal	+ inherited `Classical.choice`	Factoids 4.4–4.5; type-level `Finset` frontier
Algebraic ⇒ CL	classical	1972 topological $\ll$
Product / function space (1982)	+ inherited `Classical.choice`	No witness extraction in the maps
Separated sum (1982)	+ `Classical.choice`	Token polarity trichotomy
Factoid 4.6 ApproxMap ↔ ScottContinuous	+ inherited `Classical.choice`	Type-level `Finset` frontier
ScottMap conjugation	+ `Classical.choice`	Via 1972 `ScottMap`

Target discipline (from the 1982 package): prefer constructive proofs wherever Scott's 1982 text emphasizes constructivity; call out classical frontiers explicitly rather than hiding choice in automation.

Mathlib 4.33 makes `Finset.instSetLike` and `Finset.instPartialOrder` depend on `Classical.choice`. Consequently `#print axioms` reports choice for declarations whose types traverse `InfoSys`, even when their proof terms only manipulate explicit finite data. Here "no witness extraction" distinguishes that inherited library-instance footprint from genuine uses such as separated-sum polarity classification.

5.5 Worked example — S-expressions / trees

Dependencies. Inside WorkedExampleSExpr, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. BridgeTheorems is the Lean files in that chapter folder, not in a subfolder. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

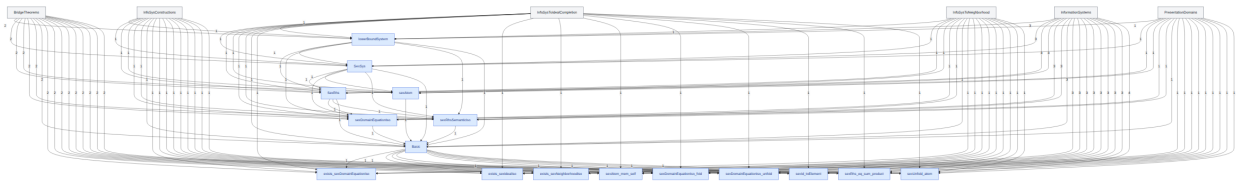


Figure 34: Lean module map.

5.5.1 Human-English

Lean packaging: `WorkedExampleSExpr.lean`, `SexDomainEquation.lean`. The Palomar compared family includes `sexNeighborhoodIso`, `sexIdealIso`, and `sexDomainEquationIso` (Challenge / `comparator.json`). The compared domain-equation declaration is the order isomorphism `SexSys.Element ≃o SexRhs.Element` (`|T| ≃o |A + (T × T)|`), not the generic semantic factor `WithBot (|A| ⊕ (|T| × |T|)) ≃o |A + (T × T)|`.

Overview The bridges of §§2–3 are abstract. This section fixes **one** concrete domain — Scott's S-expression / tree equation `T ≅ A + (T × T)` (**[Sco82]**, Factoid 8.1) over the $\mathbb{N}$ lower-bound atom system (Factoid 2.4) — and asks what that domain looks like in each paradigm:

Paradigm	What an element of `T` is
1982	a consistent, deductively closed set of tree tokens
1980	a filter of basic opens `[u]` on that token domain
1972	a point of an algebraic continuous lattice (ideal of finite elements)

We build the domain natively as an information system (§5.2), then **read the same carrier** as a neighbourhood system (§5.3) and as a continuous lattice (§5.4). Section 5.5 exhibits the order isomorphisms for this instance — so that, on S-expressions,

`T_1982 ≃o T_1980 ≃o Ideal(K(T))` and `Ideal(K(T))` is a continuous lattice,

hence transitively `T_1982 ≃o T_1980` and (via the algebraic ⇒ continuous frontier) the 1972 presentation of the same domain. Order isomorphism is an equivalence relation, so the three presentations determine one domain up to `≃o`. Section 5.6 records two extras that live on top of the carriers: the domain equation at the level of domains, and identity as a morphism in both the approximable-map and Scott-continuous languages.

Information system (1982) Atoms are propositions `n ≤ x` on $\mathbb{N}$ (`lowerBoundSystem`). The tree system `SexSys := treeSystem lowerBoundSystem` has inductive tokens `TreeToken ℕ` (`bot` / `atom` / `pairL` / `pairR`). Consistency and entailment are Scott's sum×product clauses; Factoid 8.1 records that this is literally the information system of the right-hand side `A + (T × T)`:

- `SexRhs = sumSystem A (productSystem T T)` (`sexRhs_eq_sum_product`);
- token unfolding `treeUnfold` sends `atom n` to the left summand (`sexUnfold_atom`) and is a retraction onto the official sum-of-product carrier, with section `treeFold`;

- TreeEnt matches official product `ent_bot` on the two encodings of `(Δ, Δ)` (`pairL Δ` and `pairR Δ`), so closed elements are saturated for `ker (treeUnfold)`.

Finite elements include singleton atom closures `sexAtom n = ū` for `u = {atom n}`. Elements of `|T|` are the consistent closed sets of tokens — the 1982 presentation of the S-expression domain.

Neighbourhood system (1980) From `|T|` one obtains a neighbourhood system whose basic opens are `[u] = {x ∈ |T| | ↑u ⊆ x}`. In this paradigm an element of the domain is a **filter** of such opens (not a raw set of tokens). Nothing new is invented: it is the image of `SexSys` under `InfoSysToNeighborhood`. The concrete iso of §5.5 below is exactly "read each token-element as its filter of basic opens."

Continuous lattice (1972) Finite elements `K(T)` are the closures of consistent finsets. In the algebraic style that feeds Scott's 1972 theory, a domain element is an **ideal** of `K(T)` — the ideal completion of the compact basis. That poset of ideals is an algebraic complete lattice, hence a continuous lattice (`AlgebraicLattice ⇒ ContinuousLattice`, §3.5). This is the 1972 presentation of the same S-expression domain: points ordered by inclusion of ideals, with way-below recovered from the compact basis.

We do not claim a choice-free `D ≃o RoundFilter` story built from trees alone; the round ⇑-filter identification of §3.1 applies once one is already in the continuous-lattice setting.

Equivalence for this instance Specializing the bridges of §3 to `SexSys` yields order isomorphisms of carriers:

- `sexNeighborhoodIso : |T| ≃o` filters of `[u]` (`InfoSysToNeighborhood.domainOrderIso`) **— 1982 ≃o 1980**;
- `sexIdealIso : |T| ≃o Ideal (FiniteElement T)` (`InfoSysToIdealCompletion.domainOr`) **— 1982 ≃o algebraic / 1972 carrier**;
- `sexNeighborhoodIdealIso` (`neighborhood_ideal_iso`) — the constructive triangle closing **1980 ≃o Ideal(K(T))** without going back through tokens.

Composing any two edges recovers the third: isomorphism is transitive, so on this example the three presentations are pairwise equivalent. The 1972 corner uses the algebraic ⇒ continuous implication already flagged in §3.5 / §4. The neighbourhood ↔ information ↔ ideal triangle inherits `Classical.choice` only through the `Finset` instance frontier of §4.

Domain equation and morphisms Beyond identifying the carriers, the same example exercises constructions and maps.

Domain equation. Factoid 8.1's token unfolding `treeUnfold` (section `treeFold`) lifts to an order isomorphism of the tree domain with the official RHS domain:

`sexDomainEquationIso : SexSys.Element ≃o SexRhs.Element`

(`treeDomainIso`; `|T| ≃o |A + (T × T)|`). The maps are verified unfolding: the carrier of `sexDomainEquationIso x` is `treeUnfold '' x.carrier`, and the carrier of the inverse is the preimage `treeUnfold ⁻¹' y.carrier` (`sexDomainEquationIso_unfold /`

sexDomainEquationIso_fold). The only non-injectivity of treeUnfold is Scott's two encodings of the product bottom (pairL Δ and pairR Δ); after the ent_bot match, closed elements are saturated for that kernel, so image and preimage invert. The generic semantic factor WithBot (|A| ⊕ (|T| × |T|)) ≃o SexRhs.Element is the uncompared sexRhsSemanticIso (classical only through the 1982 sum trichotomy); it is **not** the compared fixed-point equation.

Morphisms. The identity approximable map idMap T (Prop 5.4) transports along Factoid 4.6 to a Scott-continuous endomap sexIdScottContinuous with toFun = id (sexId_toElement) — the same endomap, named once in each morphism language.

Axioms. Object-level neighbourhood / ideal isos, sexDomainEquationIso, and Factoid 4.6 for idMap audit to {propext, Classical.choice, Quot.sound} through the InfoSys/Finset frontier of §4. The uncompared semantic factor sexRhsSemanticIso additionally uses the 1982 sum trichotomy.

5.5.2 AI: Human-English to AI-Lean

BridgeTheorems/TreeProd.lean
Lean source: DomainTheory/BridgeTheorems/TreeProd.lean
BridgeTheorems/WorkedExampleSExpr/lowerBoundSystem.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/lowerBoundSystem.lean
BridgeTheorems/WorkedExampleSExpr/SexSys.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/SexSys.lean
BridgeTheorems/WorkedExampleSExpr/SexRhs.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/SexRhs.lean
BridgeTheorems/WorkedExampleSExpr/sexAtom.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/sexAtom.lean
BridgeTheorems/WorkedExampleSExpr/sexDomainEquationIso.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/sexDomainEquationIso.lea
BridgeTheorems/WorkedExampleSExpr/sexRhsSemanticIso.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/sexRhsSemanticIso.lean
BridgeTheorems/WorkedExampleSExpr/Basic.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/Basic.lean
BridgeTheorems/WorkedExampleSExpr/exists_sexDomainEquationIso.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/exists_sexDomainEquation
BridgeTheorems/WorkedExampleSExpr/exists_sexIdealIso.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/exists_sexIdealIso.lean
BridgeTheorems/WorkedExampleSExpr/exists_sexNeighborhoodIso.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/exists_sexNeighborhoodIs
BridgeTheorems/WorkedExampleSExpr/sexAtom_mem_self.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/sexAtom_mem_self.lean
BridgeTheorems/WorkedExampleSExpr/sexDomainEquationIso_fold.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/sexDomainEquationIso_fold.lean
BridgeTheorems/WorkedExampleSExpr/sexDomainEquationIso_unfold.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/sexDomainEquationIso_unfold.lean

BridgeTheorems/WorkedExampleSExpr/sexId_toElement.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/sexId_toElement.lean
BridgeTheorems/WorkedExampleSExpr/sexRhs_eq_sum_product.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/sexRhs_eq_sum_product.lean
BridgeTheorems/WorkedExampleSExpr/sexUnfold_atom.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr/sexUnfold_atom.lean
BridgeTheorems/WorkedExampleSExpr.lean
Lean source: DomainTheory/BridgeTheorems/WorkedExampleSExpr.lean
BridgeTheorems/treeFold.lean
Lean source: DomainTheory/BridgeTheorems/treeFold.lean
BridgeTheorems/treeFold_eq_or_pairBots.lean
Lean source: DomainTheory/BridgeTheorems/treeFold_eq_or_pairBots.lean
BridgeTheorems/treeUnfold_treeFold.lean
Lean source: DomainTheory/BridgeTheorems/treeUnfold_treeFold.lean
BridgeTheorems/unfoldInsert.lean
Lean source: DomainTheory/BridgeTheorems/unfoldInsert.lean
BridgeTheorems/SexDomainEquationInst10.lean
Lean source: DomainTheory/BridgeTheorems/SexDomainEquationInst10.lean
BridgeTheorems/foldInsert.lean
Lean source: DomainTheory/BridgeTheorems/foldInsert.lean
BridgeTheorems/SexDomainEquationInst15.lean
Lean source: DomainTheory/BridgeTheorems/SexDomainEquationInst15.lean
BridgeTheorems/TreeEnt_pairL_bot_of_pairs.lean
Lean source: DomainTheory/BridgeTheorems/TreeEnt_pairL_bot_of_pairs.lean
BridgeTheorems/TreeEnt_pairR_bot_of_pairs.lean
Lean source: DomainTheory/BridgeTheorems/TreeEnt_pairR_bot_of_pairs.lean
BridgeTheorems/foldFinset.lean
Lean source: DomainTheory/BridgeTheorems/foldFinset.lean
BridgeTheorems/mem_closed_pair_bots.lean
Lean source: DomainTheory/BridgeTheorems/mem_closed_pair_bots.lean
BridgeTheorems/saturated_of_closed.lean
Lean source: DomainTheory/BridgeTheorems/saturated_of_closed.lean
BridgeTheorems/mem_foldr_fold.lean
Lean source: DomainTheory/BridgeTheorems/mem_foldr_fold.lean
BridgeTheorems/mem_foldFinset.lean
Lean source: DomainTheory/BridgeTheorems/mem_foldFinset.lean
BridgeTheorems/mem_foldr_unfold.lean
Lean source: DomainTheory/BridgeTheorems/mem_foldr_unfold.lean
BridgeTheorems/unfoldFinset.lean
Lean source: DomainTheory/BridgeTheorems/unfoldFinset.lean
BridgeTheorems/mem_unfoldFinset.lean
Lean source: DomainTheory/BridgeTheorems/mem_unfoldFinset.lean
BridgeTheorems/lftFinset_image_unfold.lean

Lean source: DomainTheory/BridgeTheorems/lftFinset_image_unfold.lean
BridgeTheorems/rhtFinset_image_unfold_mem.lean
Lean source: DomainTheory/BridgeTheorems/rhtFinset_image_unfold_mem.lean
BridgeTheorems/SumCon_image_treeCon.lean
Lean source: DomainTheory/BridgeTheorems/SumCon_image_treeCon.lean
BridgeTheorems/SumEnt_treeFold.lean
Lean source: DomainTheory/BridgeTheorems/SumEnt_treeFold.lean
BridgeTheorems/TreeCon_image_sumCon.lean
Lean source: DomainTheory/BridgeTheorems/TreeCon_image_sumCon.lean
BridgeTheorems/TreeEnt_sumEnt.lean
Lean source: DomainTheory/BridgeTheorems/TreeEnt_sumEnt.lean
BridgeTheorems/foldElement.lean
Lean source: DomainTheory/BridgeTheorems/foldElement.lean
BridgeTheorems/unfoldFinset_foldFinset.lean
Lean source: DomainTheory/BridgeTheorems/unfoldFinset_foldFinset.lean
BridgeTheorems/unfoldElement.lean
Lean source: DomainTheory/BridgeTheorems/unfoldElement.lean
BridgeTheorems/foldElement_unfoldElement.lean
Lean source: DomainTheory/BridgeTheorems/foldElement_unfoldElement.lean
BridgeTheorems/unfoldElement_foldElement.lean
Lean source: DomainTheory/BridgeTheorems/unfoldElement_foldElement.lean
BridgeTheorems/treeDomainIso.lean
Lean source: DomainTheory/BridgeTheorems/treeDomainIso.lean
BridgeTheorems/SexDomainEquation.lean
Lean source: DomainTheory/BridgeTheorems/SexDomainEquation.lean

5.5.3 AI: AI-Lean to AI-English

5.5.4 AI: AI-English to Human-English Concordance

5.6 ContinuousLatticeToNeighborhood

Dependencies. Inside ContinuousLatticeToNeighborhood, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

5.7 InfoSysConstructions

Dependencies. Inside InfoSysConstructions, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

5.8 InfoSysToIdealCompletion

Dependencies. Inside InfoSysToIdealCompletion, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

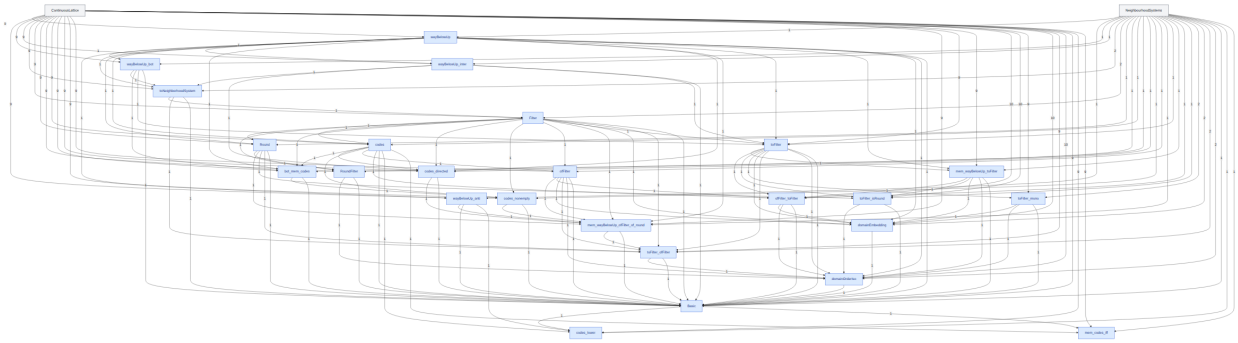


Figure 35: Worked example — S-expressions / trees.

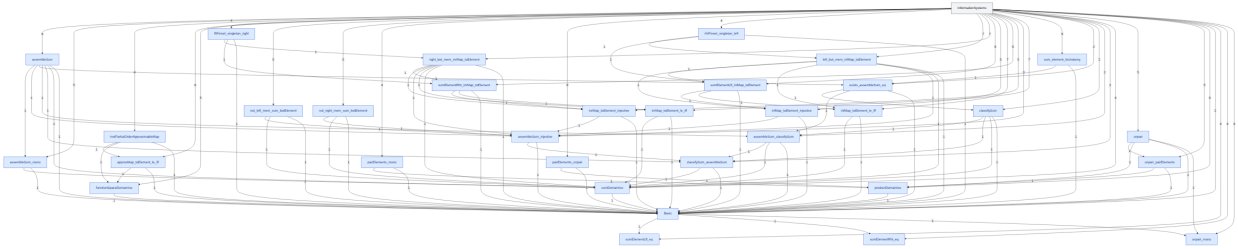


Figure 36: ContinuousLatticeToNeighborhood.

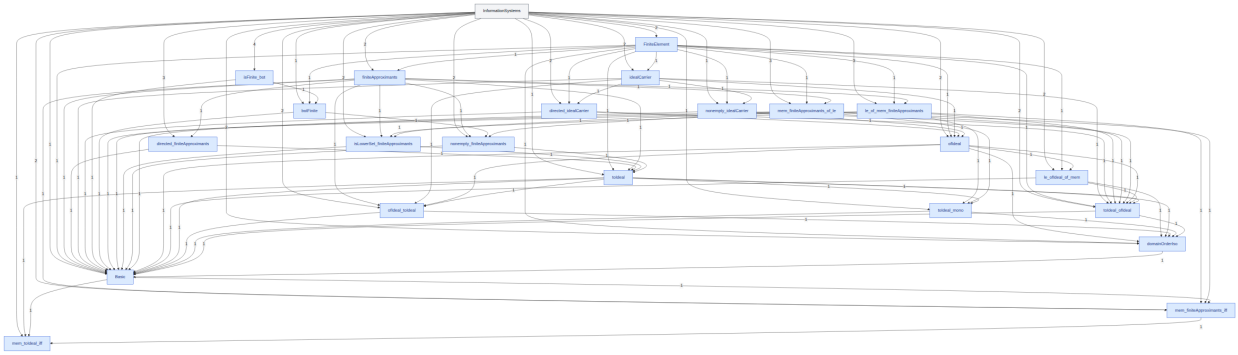


Figure 37: InfoSysConstructions.

5.9 InfoSysToNeighborhood

Dependencies. Inside InfoSysToNeighborhood, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. BridgeTheorems is the Lean files in that chapter folder, not in a subfolder. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

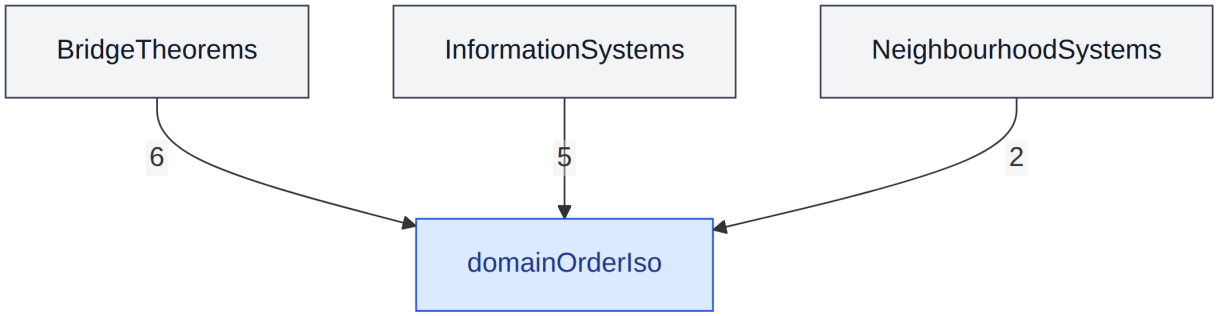


Figure 38: InfoSysToIdealCompletion.

5.10 NeighborhoodToInfoSys

Dependencies. Inside NeighborhoodToInfoSys, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. BridgeTheorems is the Lean files in that chapter folder, not in a subfolder. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

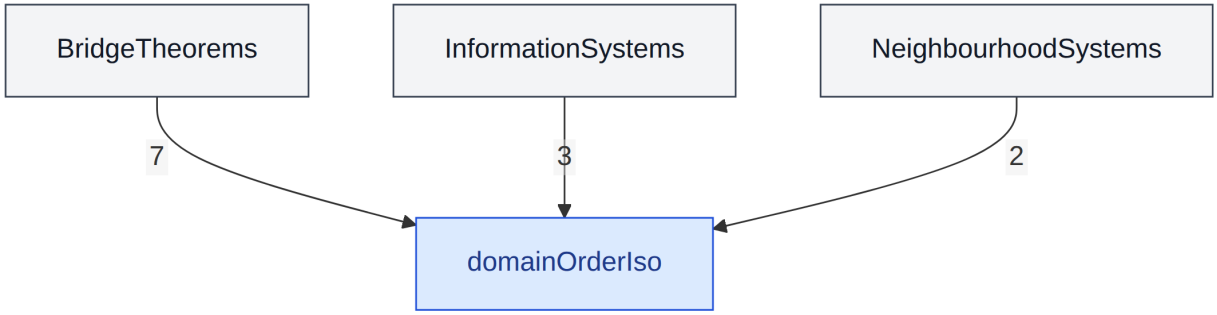


Figure 39: InfoSysToNeighborhood.

5.11 PresentationDomains

Dependencies. Inside PresentationDomains, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. BridgeTheorems is the Lean files in that chapter folder, not in a subfolder. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

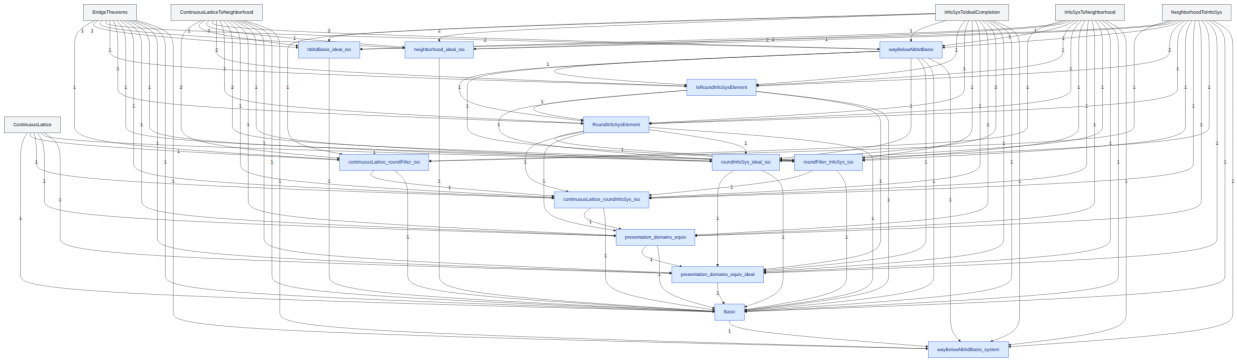


Figure 40: NeighborhoodToInfoSys.

6 Acknowledgments

- **Dana Scott** — *Continuous Lattices* **[Sco72]**, *Lectures on a Mathematical Theory of Computation* (PRG-19) **[Sco81]**, and *Domains for Denotational Semantics* **[Sco82]**, the foundations this development builds on.

6.1 AI-assisted development

The human author retains sole responsibility for the mathematical content, the choice of formalization route, and every formal claim in this work. Following standard publisher practice (e.g., COPE guidance on authorship and AI tools **[COPE24]**), **no large language model is listed as a co-author** — authorship implies an accountability that automated systems cannot bear.

Because this development may borrow Lean and proof patterns from the vendored sibling formalizations `scott1972`, `scott1976`, `scott1980`, `scott1982`, and `scott_models`, **every model in the registry is treated as used** for acknowledgement purposes. We gratefully acknowledge assistance from the following tools (auto-generated from `scripts/ai_model_cards.py` when building `arxiv.tex`):

- **Cursor [Cur26]** — agent-assisted editing in the Cursor IDE: domain-theory theorems in Lean 4 / mathlib, `lake build` repair, drafting this narrative (`arxiv.md`), and tracking the formalized inventory. Generated Lean was provisional until it compiled under the pinned toolchain. Also used in the sibling formalizations whose portable work may be copied into this repo.
- **Cursor Composer 2.5 Fast [Cmp25]** — routine multi-step work: module scaffolding, dependency-ordered wiring of `DomainTheory/`, documentation and Mermaid blueprints, and medium proof obligations where the strategy was already fixed (`composer-2.5`). Also used in sibling repos whose portable Lean may be adapted here.
- **Cursor Grok 4.5 [Grk45]** — primary agent model for the DomainTheory sessions: domain-theory constructions, inventory design in `arxiv.md`, constructivity audits, and adaptation of portable patterns from prior Scott formalizations. Jointly trained by SpaceXAI and Cursor; used here via the Cursor agent environment.
- **Anthropic Claude Sonnet 5 (medium reasoning) [Son26]** — day-to-day formalization and proof-engineering in Cursor at the medium reasoning tier in sibling Scott formalizations (and available for this repo): inventory and narrative maintenance, module wiring, and medium-complexity Lean obligations where the proof strategy was already fixed. Listed because portable prior work may be copied into DomainTheory.
- **Anthropic Claude Opus 4.8 (high reasoning) [Ant26]** — selective use for the heaviest proof work in sibling formalizations (e.g. continuous lattices and PRG-19). Every emitted proof term was checked by the Lean kernel. Listed because portable prior work may be copied into DomainTheory.
- **Google Gemini 3.5 Flash [Gem25]** — exploratory passes in sibling formalizations (typographic conventions, scope decisions). Listed because portable prior work may be copied into DomainTheory.

All definitions, constructivity audits, and final prose were reviewed by the human author, who takes full responsibility for them.

6.2 Artifact availability and reproducibility

The development is at github.com/catskillsresearch/DomainTheory. GitHub Actions CI runs `lake build` on `main`.

Locally:

```
lake exe cache get
lake build DomainTheory
```

Sibling packages `scott1972`, `scott1976`, `scott1980`, `scott1982`, and `scott_models` are vendored under `vendor/` (frozen revisions in `vendor/FROZEN.txt`); they are not Lake path dependencies. `arxiv.md` is the durable inventory and proof narrative. Axiom audits: `#print axioms` on the compared names in `comparator.json`.

Build the arXiv PDF / submission zip (Lean Code appendix = GitHub hyperlinks):

```
bash scripts/build_arxiv_tex.sh      # arxiv.md  ->  arxiv.tex + figures/
bash scripts/build_arxiv_pdf.sh      # compile PDF + package dist/arxiv_submit.zip
# or: bash scripts/package_arxiv_submit.sh
```

7 References

- **[Cur26]** Anysphere, Inc. *Cursor: AI-native code editor and agent environment*. https://cursor.com (accessed 2026).
- **[Cmp25]** Anysphere, Inc. *Composer 2.5*. Model announcement and documentation, https://cursor.com/blog/composer-2-5; model card as integrated in Cursor, https://cursor.com/docs/models (accessed 2026).
- **[Grk45]** SpaceXAI and Anysphere, Inc. *Grok 4.5*. Model documentation, https://docs.x.ai/developers/models/grok-4.5; Cursor announcement, https://cursor.com/blog/grok-4-5 (accessed 2026).
- **[Son26]** Anthropic. *Claude Sonnet 5* (medium reasoning variant). System card, https://www.anthropic.com/claude-sonnet-5-system-card; model documentation as integrated in Cursor, https://cursor.com/docs/models (accessed 2026).
- **[Ant26]** Anthropic. *Claude Opus 4.8* (high thinking/reasoning variant). System card and announcement, https://www.anthropic.com/news/claude-opus-4-8; model documentation as integrated in Cursor, https://cursor.com/docs/models/claude-opus-4-8 (accessed 2026).
- **[Gem25]** Google DeepMind. *Gemini 3.5 Flash*. Technical documentation and model cards. https://ai.google.dev/gemini-api/docs/models (accessed 2026).

J. C. Abbott, ed. (1970), *Trends in Lattice Theory*, Van Nostrand Reinhold Mathematical Studies, vol. 31 (1970).

S. Abramsky and A. Jung (1994), *Domain Theory*. In *Handbook of Logic in Computer Science*, Vol. 3, Oxford University Press, 1994. **[AJ94]**

L. Aiello, M. Aiello and R. W. Weyhrauch (1974), *The semantics of PASCAL in LCF*, Artificial Intelligence Lab. Memo. AIM-221, Stanford Univ., Stanford, Calif.

S. Alagić (1974), *Categorical theory of tree processing*, Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 80–99.

P. Alexandroff and H. Hopf (1935), *Topologie I*, Springer-Verlag, (1935).

M. A. Arbib and E. G. Manes (1974a), *Fuzzy morphisms in automata theory*, Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 98–105.

M. A. Arbib and E. G. Manes (1974b), *Categorists' view of automata and systems*, Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 62–79.

M. A. Arbib and E. G. Manes (1974c), *Basic concepts of category theory applicable to computation and control*, Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 2–41.

J. W. de Bakker (1969), *Semantics of Programming Languages*, Advances in Information Systems Science, vol. 2, Plenum Press, New York.

J. W. de Bakker and D. Scott (1969), *A theory of programs*, Unpublished notes, IBM Seminar, Vienna, 1969.

J. W. de Bakker (1971a), *Recursive procedures*, Mathematical Centre Tracts, vol. 24, Amsterdam.

J. W. de Bakker (1971b), *Recursion, induction and symbol manipulation*, Proc. MC-25 Informatica Symposium, Mathematical Centre Tracts, vol. 38, Amsterdam.

J. W. de Bakker and W. P. de Roever (1972), *A Calculus for Recursive Program Schemes*, Proc. IRIA Colloq. on Automata, North-Holland, Amsterdam.

J. W. de Bakker and L. G. L. T. Meertens (1973), *On the completeness of the inductive assertion method*, Mathematical Centre Rep. IW 12/72, Amsterdam.

J. W. de Bakker and L. G. L. T. Meertens (1974), *Fixed points in programming theory*, Foundations of Computer Science, J. W. de Bakker, ed., Mathematical Centre Tract, vol. 63, Amsterdam.

H. P. Barendregt (1971), *Some extensional term models for combinatory logics and λ-calculi*, Ph.D. thesis, Univ. of Utrecht.

H. Bekić (1969), *Definable operations in general algebra, and the theory of automata and flowcharts*, Rep., IBM Lab., Vienna.

H. Bekić (1971), *Towards a mathematical theory of processes*, Tech. Rep. TR 25.125, IBM Lab., Vienna.

H. Bekić et al. (1974), *A formal definition of a PL/I subset, Parts I and II*, Tech. Rep. TR 25.139, IBM Lab., Vienna.

E. Binz and H. H. Keller (1966), *Funktionenräume in der Kategorie der Limesräume*, Annales Academiae Scientiarum Fennicae, Series A, I. Mathematica, no. 383 (1966), 21 pp.

R. S. Bird (1974), *Unsolvability of the inclusion problem for DBS schemas*, Rep. RCS22, Dept. of Computer Sci., Univ. of Reading.

G. Birkhoff (1967), *Lattice Theory*, 3rd ed., American Mathematical Society Colloquium Publications, vol. 25, Providence, R.I.

A. Blikle (1971), *Algorithmically definable functions: A contribution towards the semantics of programming languages*, Dissertationes Math. Rozprawy Mat., 85.

A. Blikle (1972), *Equational languages*, Information Control, pp. 134–147.

A. Blikle and A. Mazurkiewicz (1972), *An algebraic approach to the theory of programs, algorithms, languages and recursiveness*, Proc. Internat. Sympos. and Summer School on the Mathematical Foundations of Computer Sci., Warsaw-Jabłonna.

A. Blikle (1973), *An algebraic approach to programs and their computations*, Proc. Symp. and Summer School on the Mathematical Foundations of Computer Sci., High Tatras, Czechoslovakia.

A. Blikle (1974), *Proving programs by sets of computations*, Proc. 3rd Symp. on the Mathematical Foundation of Computer Sci., Jadwisin, Poland; Lecture Notes in Computer Science, Springer-Verlag, Berlin, 1974.

C. Böhm (1966), *The CUCH as a formal and descriptive language*, Formal Language Description Languages for Computer Programming, T. B. Steel, ed., North-Holland, Amsterdam, pp. 179–197.

C. Böhm (1968), *Alcune proprietà delle forme β-η-normali nel λ-κ-calcolo*, Consiglio Nazionale delle Ricerche: Pubblicazione 696 dell' Istituto per le Applicazioni del Calcolo, Roma.

C. Böhm (1975), *λ-Calculus and computer science theory*, Proc. Rome Symp., March 1975, Lecture Notes in Computer Science, vol. 37, Springer-Verlag, Berlin.

R. M. Burstall (1969), *Proving properties of programs by structural induction*, Comput. J., 12, pp. 41–48.

R. M. Burstall (1972a), *Some techniques for proving the correctness of programs which alter data structures*, Machine Intelligence vol. 7, B. Meltzer and D. Michie, eds., Edinburgh, pp. 23–50.

R. M. Burstall (1972b), *An algebraic description of programs with assertions, verification and simulation*, Proc. ACM Conf. on Proving Assertions about Programs, Las Cruces, New Mexico, pp. 7–14.

R. Burstall and J. W. Thatcher (1974), *The algebraic theory of recursive program schemes*, Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 154–160.

J. M. Cadiou (1973), *Recursive definitions of partial functions and their computations*, Ph.D. thesis, Computer Sci. Dept., Stanford Univ., Stanford, Calif.

J. M. Cadiou and J. J. Levy (1973), *Mechanizable proofs about parallel processes*, Presented at the 14th Ann. Symp. on Switching and Automata Theory.

J. W. Case (1971), *Enumeration reducibility and the partial degrees*, Ann. Math. Logic, 2, pp. 419–440.

E. Čech (1966), *Topological Spaces* (revised by Z. Frolík and M. Katětov), Prague.

A. K. Chandra and Z. Manna (1973), *On the power of programming features*, Artificial Intelligence Memo. AIM-185, Stanford Univ., Stanford, Calif.

A. K. Chandra (1974), *Degrees of translatability and canonical forms in program schemas part I*, IBM Res. Rep. RC4733, Yorktown Heights, N.Y.

A. K. Chandra (1974a), *The Power of Parallelism and Nondeterminism in Programming*, IBM Res. Rep. RC4776, Yorktown Heights, N.Y.

A. K. Chandra (1974b), *Generalized program schemas*, IBM Res. Rep. RC4827, Yorktown Heights, N.Y.

A. Church (1951), *The calculi of λ-conversion*, Annals of Mathematical Studies, vol. 6, Princeton University Press, Princeton, N.J.

M. J. Clint (1972), *Program proving: Co-routines*, Acta Informatica, 2, pp. 50–63.

Committee on Publication Ethics (COPE) (2024), *Authorship and AI tools: COPE position statement*. 2024. https://publicationethics.org/guidance/cope-position/authorship-and-ai-tools **[COPE24]**

R. C. Constable and D. Gries (1972), *On classes of program schemata*, this Journal, 1, pp. 66–118.

D. C. Cooper (1966), *The equivalence of certain computations*, Comput. J., 9, pp. 45–52.

B. Courcelle and J. Vuillemin (1974), *Complétude d'un système formel pour des équations récursives simples*, Compte-Rendu du Colloque de Paris.

B. Courcelle and J. Vuillemin (1974), *Semantics and axiomatics of a simple recursive language*, Rapport Laboria, vol. 60, IRIA; Also: 6th Ann. ACM Symp. on the Theory of Computing, Seattle, Washington.

B. Courcelle, G. Kahn and J. Vuillemin (1974), *Algorithmes d'équivalence pour des équations récursives simples*, Proc. 2nd Colloq. on Automata Languages and Programming, Saarbrücken; Lecture Notes in Computer Science, Springer-Verlag, Berlin, pp. 213–220.

H. B. Curry and R. Feys (1958), *Combinatory Logic*, vol. 1, North-Holland, Amsterdam.

H. B. Curry, J. R. Hindley and J. Seldin (1971), *Combinatory Logic*, vol. 2, North-Holland, Amsterdam.

M. Davis (1958), *Computability and Unsolvability*, McGraw-Hill, New York.

E. W. Dijkstra (1972), *Notes on structured programming*. Structural Programming, C. A. R. Hoare, E. W. Dijkstra and O. J. Dahl, Academic Press, New York.

E. W. Dijkstra (1974), *A simple axiomatic basis for programming language constructs*. Indag. Math., 36, pp. 1–15.

E. W. Dijkstra (1976), *A Discipline of Programming*. Prentice-Hall, Englewood Cliffs, N.J., to appear.

J. Donahue (1974), *Scottery Child's Guide No. 1*, Dept. of Comput. Sci., Univ. of Toronto.

B. N. Duong (1974), *A high level, variable free calculus for recursive programming*, Comput. Sci. Dept. Rep. CS 74 03, Univ. of Waterloo.

S. Eilenberg and C. C. Elgot (1970), *Recursiveness*, Academic Press, New York.

S. Eilenberg and C. C. Elgot (1974), *Automata, Languages and Machines*, vol. A, Academic Press, New York (vol. B in press).

C. C. Elgot, A. Robinson and J. D. Rutledge (1966), *Multiple control computer models*. IBM Res. Rep. RC 1622, Yorktown Heights, N.Y.

C. C. Elgot (1967), *Abstract algorithms and diagram closure*, IBM Res. Rep. RC 1750, Yorktown Heights, N.Y.

C. C. Elgot (1971), *Algebraic theories and program schemes*, Symposium on Semantics of Algorithmic Languages, E. Engeler, ed., Lecture Notes in Mathematics, vol. 188, Springer-Verlag, New York.

M. H. van Emden and R. A. Kowalski (1974), *The semantics of predicate logic as a programming language*. Memo. no. 83 (MIP-R-103), Dept of Machine Intelligence, Univ. of Edinburgh.

E. Engeler (1967), *Algorithmic properties of structures*. Mathematical Systems Theory, 1, pp. 183–195.

E. Engeler (1968), *Formal languages: Automata and structures*. Lectures in Advanced Mathematics, Markham.

E. Engeler (1974), *Algorithmic Logic*, Foundations of Computer Science, J. W. de Bakker, ed., Mathematical Centre Tract MCT 63, Amsterdam.

J. Engelfriet (1974), *Simple program schemes and formal languages*, Springer Lecture Notes in Computer Science, vol. 20.

J. Engelfriet and E. M. Schmidt (1975), *IO and OI*, DAIMI PB-47, Matematisk Institut, Aarhus Universitet, Datalogisk Afdeling, Denmark.

Ju. L. Ershov (1971), *Computable numerations of morphisms*. Algebra and Logic, 10, pp. 247–308.

Ju. L. Ershov (1972a), *Computable functions of finite types*. Algebra and Logic, 11, pp. 367–437.

Ju. L. Ershov (1972b), *Everywhere defined (total) continuous functionals*. Algebra and Logic, 11, pp. 656–665.

Ju. L. Ershov (1972d), *Continuous lattices and A-spaces*, Dokl. Akad. Nauk USSR, 207, pp. 523–526.

Ju. L. Ershov (1972e), *Theory of A-spaces*, Algebra and Logic, 12, pp. 369–416.

Ju. L. Ershov (1973), *Theorie der Numerierungen*. Veb Deutscher Verlag der Wissenschaften, Berlin.

M. J. Fischer (1972), *λ-calculus schemata*, Proc. ACM Conf. Proving Assertions about Programs, Las Cruces, N.M., pp. 104–109.

A. E. Fischer and M. J. Fischer (1973), *Mode modules as representations of domains*. Proc. ACM Symp. on Principles of Programming Languages, Boston, pp. 139–143.

R. W. Floyd (1967), *Assigning meanings to programs*, Proc. Symp. in Appl. Math., vol. 19, Mathematical Aspects of Computer Science, J. T. Schwartz, ed., pp. 33–41.

M. M. Fokkinga (1974), *Inductive Assertion Patterns for Recursive Procedures*. Compte-Rendu de Colloque de Paris.

R. M. Friedberg and H. R. Rogers (1959), *Reducibility and completeness for sets of integers*, Z. Math. Logik Grundlagen Math., 5, pp. 117–125.

H. Friedman (1971), *Algorithmic procedures, generalized Turing algorithms, and elementary recursion theory*, Logic Colloquium 1969, North-Holland, Amsterdam, pp. 361–389.

S. J. Garland and D. C. Luckham (1972), *Translating recursion schemes into program schemes*, Proc. ACM Conf. on Proving Assertions about Programs, Las Cruces, N.M., pp. 83–96.

H. Gericke (1966), *Lattice Theory*, Harrap.

G. Gierz et al. (2003), *Continuous Lattices and Domains*. Cambridge University Press, 2003. **[GHKLMS03]**

J. A. Goguen (1967), *L-fuzzy sets*, J. Math. Anal. Appl., 18, pp. 145–174.

J. A. Goguen (1969), *Categories of L-sets*, Bull. Amer. Math. Soc., 75, pp. 524–622.

J. A. Goguen (1972), *On homomorphisms, simulations, correctness, subroutines and termination for programs and program schemes*. Proc. 13th IEEE Conf. on Switching and Automata Theory, pp. 52–60.

J. A. Goguen (1974), *Semantics of computation*, Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 234–249.

J. A. Goguen et al. (1975), *Initial algebra semantics*, IBM Res. Rep. RC 5243, Yorktown Heights, N.Y.

M. J. C. Gordon (1973a), *Models of pure LISP*, Experimental Programming Rep. 31, School of Artificial Intelligence, Univ. of Edinburgh. (Also Ph.D. thesis, *Evaluation and denotation of pure LISP programs: A worked example in semantics*.)

M. J. C. Gordon (1973b), *An extended abstract of "Models of pure LISP"*, Memo. SAI-RM-7, School of Artificial Intelligence, Univ. of Edinburgh.

M. J. C. Gordon (1975a), *Operational Reasoning and denotational semantics*, Artificial Intelligence Memo. 264, Stanford Univ., Stanford, Calif.

M. J. C. Gordon (1975b), *Towards a semantic theory of dynamic binding*, Artificial Intelligence Memo. 265, Stanford Univ., Stanford, Calif.

G. Grätzer (1968), *Universal Algebra*, Van Nostrand, New York.

I. Guessarian (1974), *Sur une réduction des schémas de programmes polyadiques à des schémas monadiques et ses applications*, Compte-Rendu de Colloque de Paris.

L. Gutteridge (1971), *Some Results on Enumeration Reducibility*, Ph.D. dissertation, Simon Fraser Univ., Burnaby, B.C., Canada.

J. R. Hindley, B. Lercher and J. P. Seldin (1972), *Introduction to combinatory logic*, London Mathematical Society Lecture Note Series, vol. 7, Cambridge University Press, Cambridge, England.

J. R. Hindley and G. Mitschke (1975), *Some remarks about the connections between combinatory logic and axiomatic recursion theory*, Preprint 203, Fachbereich Mathematik, Technische Hochschule Darmstadt.

P. Hitchcock and D. M. R. Park (1972), *Induction rules and proofs of termination*, Proc. Colloques IRIA, Theorie des Automates des Languages et de la Programmation.

P. Hitchcock (1974), *An approach to formal reasoning about programs*, Ph.D. thesis, Univ. of Warwick, England.

C. A. R. Hoare (1969), *An axiomatic basis of computer programming*, Comm. ACM, 12, pp. 576–580, 583.

C. A. R. Hoare (1971a), *Proof of a program: FIND*, Comm. ACM, 14, pp. 39–45.

C. A. R. Hoare (1971b), *Procedures and parameters: An axiomatic approach*, Symposium on Semantics of Programming Languages, E. Engeler, ed., Lecture Notes in Mathematics, vol. 188, Springer-Verlag, New York, pp. 102–116.

C. A. R. Hoare (1972), *Notes on data structuring*, Structured Programming, C. A. R. Hoare, E. W. Dijkstra and O. J. Dahl, Academic Press, New York.

C. A. R. Hoare and N. Wirth (1972), *An axiomatic definition of the programming language PASCAL*, Bericht der Fachgruppe Computer-Wissenschaften 6, Eidgenössische Technische Hochschule, Zürich.

C. A. R. Hoare and P. Lauer (1974), *Consistent and complementary formal theories of the semantics of programming languages*, Acta Informatica, 3, pp. 135–153.

C. Hosono and M. Sato (1975), *A solution to Scott's problem: "Do the retracts in $P\omega$ form a continuous lattice?"*, Research Inst. for Mathematical Sci., Kyoto (preprint).

G. Hotz (1966), *Eindeutigkeit und Mehrdeutigkeit formaler Sprachen*, Electron. Informationsverarbeit. Kybernetik (Berlin), 2, pp. 235–246.

J. M. E. Hyland (1975a), *Recursion theory on the countable functionals*, D. Phil. thesis, Oxford Univ., Oxford, England.

J. M. E. Hyland (1975b), *A survey of some useful partial order relations in terms of the lambda calculus*, Proc. Conf. on λ-Calculus and Computer Science Theory, Rome, pp. 83–95.

J. M. E. Hyland (to appear), *A syntactic characterization of the equality in some models for the lambda calculus*, J. London Math. Soc.

Y. I. Ianov (1970), *The logical scheme of algorithms*, Problems in Cybernetics, vol. 1, Pergamon Press, New York.

S. Igarashi (1972), *Admissibility of fixed point induction in first order logic of typed theories*, Artificial Intelligence Memo. AIM-168, Computer Sci. Dept., Stanford Univ., Stanford, Calif.

K. Indermark (1974), *Gleichungsdefinierbarkeit in Relationalstrukturen*, Habilitationsschrift, Mathematisch-Naturwissenschaftlichen Fakultät der Rheinischen Freidrich-Wilhelms-Universatat, Bonn, W. Germany.

C. B. Jones (1974), *Mathematical semantics of goto: Exit formulation and its relation to continuations*, preprint.

G. Kahn (1973), *A preliminary theory of parallel programs*. Rapport Laboria IRIA.

D. M. Kaplan (1969), *Regular expressions and the equivalence of programs*, J. Comput. System Sci., 3, pp. 361–385.

R. M. Karp and R. E. Miller (1969), *Parallel program schemata*, J. Comput. System Sci., 3, pp. 147–195.

J. L. Kelley (1955), *General Topology*, Van Nostrand, (1955).

D. J. Kfoury (1972), *Comparing algebraic structures up to algorithmic equivalence*, Automata, Languages and Programming, M. Nivat, ed., North-Holland, Amsterdam, pp. 253–263.

D. J. Kfoury (1974), *Translatability of schemas over restricted interpretations*, J. Comput. System Sci., 8, pp. 387–408.

S. C. Kleene (1950), *Introduction to Metamathematics*, Van Nostrand, New York.

B. Knaster (1928), *Un théorème sur les fonctions d'ensembles*, Ann. Soc. Polon. de Math., 8, pp. 133–134.

P. J. Landin (1964), *The mechanical evaluation of expressions*, Comput. J., 6, pp. 308–320.

P. J. Landin (1965), *A correspondence between ALGOL 60 and Church's lambda notation*, Comm. ACM, 8, pp. 89–101.

P. J. Landin (1966a), *A λ-Calculus approach*, Advances in Programming and Non-numerical Computation, L. Fox, ed., Pergamon Press, New York, pp. 97–141.

P. J. Landin (1966a), *A formal description of ALGOL 60*, Formal Language Description Languages for Computer Programming, T. B. Steel, ed., North-Holland, Amsterdam, pp. 266–294.

P. J. Landin (1966b), *The next 700 programming languages*, Comm. ACM, 9, pp. 157–164.

P. J. Landin (1969), *A program/machine symmetric automata theory*, Machine Intelligence, vol. 5, B. Meltzer and D. Michie, eds., Edinburgh University Press, pp. 99–120.

P. J. Landin and R. M. Burstall (1969), *Programs and their proofs: An algebraic approach*, Machine Intelligence, vol. 4, American Elsevier, New York, pp. 17–44.

J. Leszczykowski (1971), *A theorem on resolving equations in the space of languages*, Bull. Acad. Polon. Sci. Sér. Sci. Math. Astronom. Phys., 19, pp. 967–970.

C. H. Lewis and B. K. Rosen (1973–74), *Recursively defined data types, Parts I and II*. IBM Res. Reps. RC 4429 (1973), RC 4713 (1974), Yorktown Heights, N.Y.

B. Liskov and S. Zilles (1973), *An approach to abstraction*, Group Memo. 88, Project MAC, Mass. Inst. of Tech., Cambridge, Mass.

D. Luckham, D. M. R. Park and M. Paterson (1970), *On formalized computer programs*, J. Comput. System Sci., 4, pp. 220–249.

S. Mac Lane (1972), *Categories for the Working Mathematician*, Springer-Verlag, New York.

E. Manes (1974), *Category Theory Applied to Computation and Control*, Proc. 1st Internat. Symp. Math. Dept. and the Dept. of Computer and Information Sci., Univ. Mass., Amherst. Also: Lecture Notes in Computer Science, vol. 26, Springer-Verlag, New York.

Z. Manna (1969), *The correctness of programs*, J. Comput. System Sci., 3, pp. 119–127.

Z. Manna and A. Pnueli (1970), *Formalization of properties of functional programs*, J. Assoc. Comput. Mach., 17, pp. 555–569.

Z. Manna and J. McCarthy (1970), *Properties of programs and partial function logic*, Machine Intelligence 5, B. Meltzer and D. Michie, eds., Edinburgh University Press, pp. 27–38.

Z. Manna and A. Pnueli (1972), *Axiomatic approach to total correctness of programs*, Artificial Intelligence Lab. Memo. AIM-210, Stanford Univ., Stanford, Calif.

Z. Manna and J. M. Cadiou (1972), *Recursive definitions of partial functions and their computations*, Proc. ACM Conf. on Proving Assertions about Programs, Las Cruces, N.M., pp. 58–65.

Z. Manna and J. Vuillemin (1972), *Fixpoint approach to the theory of computation*, Comm. ACM, 15, pp. 528–536.

Z. Manna, Z. Ness and J. Vuillemin (1972), *Inductive methods for proving properties of programs*, Proc. ACM Conf. on Proving Assertions about Programs, Las Cruces, N.M., pp. 27–50.

Z. Manna (1974), *Mathematical Theory of Computation*, McGraw-Hill, New York.

G. Markowsky (1974), *Categories of chain-complete posets*, RC 5100, Comput. Sci. Dept. IBM T. J. Watson Research Center, Yorktown Heights, N.Y.

G. Markowsky (1974), *Chain-complete posets and directed sets with applications*, RC 5024, IBM T. J. Watson Research Center, Yorktown Heights, N. Y.

A. Mazurkiewicz (1971), *Proving algorithms by tail functions*, Working Paper for IFIP WG2.2, Feb. 1970. Since published in: *Information and Control*, 18 (1971), pp. 220–226.

A. Mazurkiewicz (1973), *Proving properties of processes*, PRACE CO PAN-CC PAS Reports, vol. 134, Warsaw.

J. McCarthy (1962), *The LISP 1.5 Programmers' Manual*, MIT Press, Cambridge, Mass.

J. McCarthy (1963a), *A basis for a mathematical theory of computation*, Computer Programming and Formal Systems, D. Braffort and D. Hirshberg, eds., North-Holland, Amsterdam, pp. 33–70.

J. McCarthy (1963b), *Towards a mathematical science of computation*, Information Processing 1962, Proc. IFIP Congress 1962, C. M. Poppleworth, ed., North-Holland, Amsterdam, pp. 21–28.

J. McCarthy (1966), *A formal description of a subset of ALGOL*, Formal Language Description Languages for Computer Programming, R. B. Steel, ed., North-Holland, Amsterdam, pp. 1–12.

J. McCarthy and J. Painter (1967), *Correctness of a computer for arithmetic expressions*, Mathematical Aspects of Computer Science, J. T. Schwartz, ed., Proc. of a Symposium in Applied Mathematics, vol. 19, pp. 33–41.

E. Michael (1951), *Topologies on Spaces of Subsets*, Transactions of the American Mathematical Society, vol. 77 (1951), pp. 152-182.

R. E. Milne (1974), *The formal semantics of computer languages and their implementations*, Ph.D. thesis, Cambridge Univ., Cambridge, England. [Also: Technical Monograph PRG-13, Oxford Univ. Computing Lab., Programming Research Group].

R. Milner (1969), *Program schemes and recursive function theory*, Machine Intelligence 5, B. Meltzer and D. Michie, eds., Edinburgh University Press, pp. 39–58.

R. Milner (1970a), *Algebraic theory of computable polyadic functions*, Computer Sci. Memo., vol. 12, University College, Swansea.

R. Milner (1970b), *Equivalences on program schemes*, J. Comput. System Sci., 4, pp. 205–219.

R. Milner (1972), *Implementation and Application of Scott's Logic for Computable Functions*, Proc. ACM Conf., Las Cruces, N.M., pp. 1–6.

R. Milner and R. Weyhrauch (1972), *Proving compiler correctness in a mechanized logic*, Machine Intelligence, 7, pp. 51–72.

R. Milner (1973), *Models of LCF*, Artificial Intelligence Memo. AIM-186, Computer Sci. Dept., Stanford Univ., Stanford, Calif.

R. Milner (1973a), *An approach to the semantics of parallel programs*, Proc. Convegno di Informatica Teorica, Instituto di Elaborazione delle Informazione, Pisa, Italy.

R. Milner (1973b), *Processes: A mathematical model of computing agents*, Proc. Colloq in Mathematical Logic, Bristol, England.

J. H. Morris (1968), *λ-calculus models of programming languages*, Ph.D. thesis, Sloan School of Management, MIT MAC Reprint TR-57, Mass. Inst. of Tech., Cambridge, Mass.

F. Lockwood Morris (1970), *The next 700 programming language descriptions*, Computer Center, Univ. of Essex (typescript).

J. H. Morris (1971), *Another recursion induction principle*, Comm. ACM, 14, pp. 351–354.

F. Lockwood Morris (1972), *Correctness of translations of programming languages*, Computer Sci. Memo. CS 72-303, Stanford Univ., Stanford, Calif.

J. H. Morris (1972), *A correctness proof using recursively defined functions*, Formal Semantics of Programming Languages, R. Rustin, ed., Prentice-Hall, Englewood Cliffs, N.J., pp. 107–224.

F. Lockwood Morris (1973), *Advice on structuring compilers and proving them correct*, Proc. SIGACT/SIGPLAN Symp. on Principles of Programming Languages, Boston, pp. 144–152.

J. H. Morris (1973), *Types are not sets*, Proc. ACM Symp. on Principles of Programming Languages, Boston, pp. 120–124.

J. Morris and R. Nakajima (1973), *Mechanical characterisation of the partial order in lattice models of λ-calculus*, Tech. Rep. 18, Univ. of Calif., Berkeley.

P. D. Mosses (1974), *The mathematical semantics of ALGOL 60*, Tech. Monograph PRG-12, Oxford Univ. Computing Lab., Programming Research Group.

P. D. Mosses (1975a), *The semantics of semantic equations*, Mathematical Foundations of Computer Science, Goos and Hartmanis, eds., Lecture Notes in Computer Science, vol. 28, Springer-Verlag, New York, pp. 409–422.

P. D. Mosses (1975b), *Mathematical semantics and compiler generation*, Thesis, Oxford Univ., Oxford, England.

J. Myhill and J. C. Shepherdson (1955), *Effective operations on partial recursive functions*, Z. Math. Logik Grundlagen Math., 1, pp. 310–317.

R. Nakajima (1975), *Infinite normal forms for λ-calculus*, λ-Calculus and Computer Science Theory, C. Böhm, ed., Springer-Verlag, Berlin, pp. 62–82.

A. Nerode (1959), *Some Stone spaces and recursion theory*, Duke Mathematical Journal, vol. 26, pp. 397–406.

M. Nivat (1972), *Langages Algébriques sur le Magma Libre et Sémantique des Schémas de Programmes*, Proc. IRIA Symposium on Automata Formal Languages and Programming, North-Holland, Amsterdam.

D. C. Oppen (1975), *On logic and program verification*, Tech. Rep. 82, Dept. Computer Sci., Univ. of Toronto.

Palomar Registry (2026), entry `PALOMAR-2026-08-25-000003`, version 1. Verified claim: order isomorphisms relating Scott's three presentations of domains — continuous lattices (1972), neighbourhood systems (PRG-19), and information systems (1982) — including the round identification `D ≃o RoundFilter ≃o RoundInfoSysElement` and the S-expression equation `T ≅ A + (T × T)` as `|T| ≃o |A + (T × T)|` (`SexSys.Element ≃o SexRhs.Element`). https://paloma

r-registry.org/entry?id=PALOMAR-2026-08-25-000003&version=1 **[PALOMAR26]**

D. M. R. Park (1970a), *Fixpoint induction and proofs of program properties*, Machine Intelligence, 5, B. Meltzer and D. Michie, eds., American Elsevier, New York, pp. 59–78.

D. M. R. Park (1970b), *Notes on a formalism for reasoning about schemes*, Univ. of Warwick, unpublished notes.

D. M. R. Park (1970c), *The Y combinator Scott's lambda-calculus models*, Univ. of Warwick, unpublished notes.

D. M. R. Park (1970d), *Finiteness is Mu-ineffable*, Theory of Computation Report, No. 3, Dept. of Computer Sci., Univ. of Warwick (1974).

M. S. Paterson (1963), *Program schemata*, Machine Intelligence, 3, D. Michie, ed., American Elsevier, New York, pp. 19–32.

M. S. Paterson and C. S. Hewitt (1970), *Comparative schematology*, Record of Project MAC Conf. on Concurrent Systems and Parallel Computation, Association for Computing Machinery, New York, pp. 119ff.

R. Platek (1964), *New foundations for recursion theory*, Thesis, Stanford Univ., Stanford, Calif., unpublished.

G. D. Plotkin (1972), *A set-theoretical definition of application*, Memo. MIP-R-95, School of Artificial Intelligence, University of Edinburgh.

G. D. Plotkin (1973a), *The λ-calculus is ω-incomplete*, Res. Memo. SAI-RM-2, School of Artificial Intelligence, Univ. of Edinburgh.

G. D. Plotkin (1973b), *Lambda-definability and logical relations*, Memo. SAI-RM-4, School of Artificial Intelligence, Univ. of Edinburgh.

G. D. Plotkin (1973c), *Call-by-name, Call-by-value and the λ-calculus*, J. Res. Memo. SAI-RM-6, School of Artificial Intelligence, Univ. of Edinburgh.

G. D. Plotkin (1975), *A powerdomain construction*, Dept. of Artificial Intelligence Res. Rep. 3, Univ. of Edinburgh.

H. Rasiowa (1973), *On ω^*-valued algorithmic logic and related problems*, Supplement to Proc. Symp. and Summer School on Mathematical Foundations of Computer Sci., High Tatras, Czechoslovakia.

P. Raulefs (1975a), *The overtyped lambda calculus*, Interner Bericht Nr. 2, Institut für Informatik, Universität Karlsruhe.

P. Raulefs (1975b), *Standard models of the overtyped lambda-calculus*, Interner Bericht Nr. 3, Institut für Informatik, Universität Karlsruhe.

R. R. Redziejowski (1972), *The theory of general events and its application to parallel programming*, T.P. 18.220 IBM Nordic Laboratory, Sweden.

J. C. Reynolds (1969), *Gedanken: A Simple Typeless Language*, Reprint 7621, Argonne National Laboratory, Argonne, Ill.

J. C. Reynolds (1972a), *Definitional interpreters for higher order programming languages*, Proc. ACM 25th Nat. Conf., Boston, vol. 2, pp. 717–740.

J. C. Reynolds (1972b), *Notes on a lattice-theoretic approach to the theory of computation*, Systems and Information Sci. Dept., Syracuse Univ., Syracuse, N.Y.

J. C. Reynolds (1974a), *On the relation between direct and continuation semantics*, Proc. 2nd Colloq. on Automata, Languages and Programming, Saarbrücken, Lecture Notes in Computer Science, vol. 14, Springer-Verlag, Berlin, pp. 141–156.

J. C. Reynolds (1974b), *Semantics of the lattice of flow diagrams*, Systems and Information Science Dept., Syracuse Univ., Syracuse, N.Y. (preprint).

J. C. Reynolds (to appear), *On the interpretations of Scott's domains*. Symposia Mathematica.

J. C. Reynolds (to appear), *Towards a theory of type structure*, Colloq. on Programming, Paris, April 1974, Lecture Notes in Computer Science, Springer-Verlag, Berlin.

W. P. de Roever (1974a), *Recursion and parameter mechanisms: An axiomatic approach*. Proc. 2nd Colloq. on Automata Languages and Programming, Saarbrucken, Lecture Notes in Computer Science, vol. 14, Springer-Verlag, Berlin, pp. 34–65.

W. P. de Roever (1974b), *Operational, mathematical and axiomatized semantics for recursive procedures and data structures*, Mathematical Centre Report ID/1, Amsterdam.

H. R. Rogers (1967), *Theory of Recursive Functions and Effective Computability*, McGraw-Hill, New York.

B. K. Rosen (1973), *Tree-manipulating systems and Church-Rosser theorems*, J. Assoc. Comput. Mach., 20.

J. D. Rutledge (1970a), *Program schemata as automata, part I*. IBM Res. RC 3098. J. Comput and System Sci., 7 (1973), pp. 543–578.

J. D. Rutledge (1970b), *Parallel processes . . . Schemata and transformation*, IBM Res. Rep. RC 2912, Yorktown Heights, N.Y.

A. Salwicki (1970a), *Formalized algorithmic languages*, Bull. Acad. Polon. Sci. Sér. Math. Astronom. Phys., 18, pp. 227–232.

A. Salwicki (1970b), *On the equivalence of FS-expressions and programs*, Bull. Acad. Polon. Sci. Sér. Math. Astronom. Phys., 18, pp. 275–278.

A. Salwicki (1970c), *On the predicate calculi with iteration quantifiers*, Bull. Acad. Polon. Sci. Sér. Math. Astronom. Phys., 18, pp. 279–286.

J. G. Sanderson (1973), *The λ calculus, lattice theory and reflexive domains*. Mathematical Institute Lecture Notes, Oxford, England.

L. P. Sasso (1971), *Degrees of unsolvability of partial functions*, Ph.D. dissertation, Univ. of Calif., Berkeley.

L. P. Sasso (1973), *A minimal partial degree*, Proc. Amer. Math. Soc., 38, pp. 388–392.

L. P. Sasso (1975), *A survey of partial degrees*. J. Symbolic Logic, 40, pp. 130–140.

D. Scott (1969), *A type-theoretical alternative to ISWIM, CUCH, OWHY*, Unpublished notes, Oxford, England.

D. Scott (1970), *Outline of a mathematical theory of computation*, Proceedings of the Fourth Annual Princeton Conference on Information Sciences and Systems, pp. 169–176. [Also: Tech. Monograph PRG-2, Oxford Univ. Computing Lab., Programming Research Group (1970).]

D. Scott (1971), *Lattice Theory, Data Types, and Semantics*, New York University Symposia in Areas of Current Interest in Computer Science (Randall Rustin ed.) (1971) to appear.

D. Scott (1971), *The lattice of flow diagrams*, Symposium on Semantics of Algorithmic Languages, E. Engeler, ed., Lecture Notes in Mathematics, vol. 188, Springer-Verlag, New York, pp. 311–366. [Also: Tech. Monograph PRG-3, Oxford Univ. Computing Lab., Programming Research Group (1970).]

D. Scott and C. Strachey (1971), *Toward a mathematical semantics for computer languages*, Proc. Symposium on Computers and Automata, Polytechnic Inst. of Brooklyn, vol. 21, pp. 19–46. [Also: Technical Monograph PRG-6, Oxford Univ. Computing Lab., Programming Research Group (1971).]

D. Scott (1972), *Continuous lattices*, in F. W. Lawvere (ed.), *Toposes, Algebraic Geometry and Logic*, Lecture Notes in Mathematics, vol. 274, Springer-Verlag, pp. 97–136. [Also: Tech. Monograph PRG-7, Oxford Univ. Computing Lab., Programming Research Group (1971).] **[Sco72]**

D. Scott (1972b), *Mathematical concepts in programming language semantics*, AFIPS Conf. Proc., vol. 40, pp. 225–234.

D. Scott (1973a), *Data types as lattices*, Unpublished lecture notes, Mathematical Centre, Amsterdam, 1973.

D. Scott (1973b), *Models for various type-free calculi*, Proc. IVth Internat. Cong. for Logic, Methodology and the Philosophy of Science, Bucharest, P. Suppes et al., eds., North-Holland, Amsterdam, pp. 157–187.

D. Scott (1975a), *Lambda calculus and recursion theory*, Proc. 3rd Scandinavian Logic Symposium, Stig Kanger, ed., North-Holland, Amsterdam, pp. 154–193.

D. Scott (1975b), *Combinators and classes*, λ-Calculus and computer science theory, Proc. Rome Symp., March 1975; Lecture Notes in Computer Science, vol. 37, Springer-Verlag, Berlin, pp. 1–26.

D. Scott (1975c), *Some philosophical issues concerning theories of combinators*, λ-Calculus and computer science theory, Proc. Rome Symp., March 1975; Lecture Notes in Computer Science, vol. 37, Springer-Verlag, Berlin, pp. 346–366.

D. Scott (1981), *Lectures on a Mathematical Theory of Computation*. Technical Monograph PRG-19, May 1981, Oxford University Computing Laboratory, Programming Research Group (neighbourhood systems). **[Sco81]**

D. Scott (1982), *Domains for Denotational Semantics*, ICALP 1982, LNCS 140, Springer, pp. 577–613. **[Sco82]**

J. C. Shepherdson (1975), *Computation over abstract structures: Serial and parallel procedures and Friedman's effective definitional schemes*, Logic Colloquium 1973, H. E. Rose and J. C. Shepherdson, eds., North-Holland, Amsterdam, pp. 445–513.

E. Spanier (1963), *Quasi-topologies*, Duke Mathematical Journal, vol. 30 (1963) pp. 1-14.

C. Strachey (1966), *Towards a formal semantics*, Formal Language Description Languages for Computer Programming, T. B. Steel, ed., North-Holland, Amsterdam, pp. 198–220.

C. Strachey (1967), *Fundamental concepts in programming languages*, Unpublished lecture notes for the NATO Summer School, Copenhagen.

C. Strachey (1972), *Varieties of programming languages*, Proc. Internat. Computing Symp., Cini Foundation, Venice, pp. 222–233. [Also: Tech. Monograph PRG-10, Oxford Univ. Computing Lab., Programming Research Group (1972).]

C. Strachey and C. Wadsworth (1974), *Continuations: A mathematical semantics for handling full jumps*, Tech. Monograph PRG-11, Oxford Univ. Computing Lab., Programming Research Group.

W. Strother (1955), *Fixed Points, Fixed Sets, and M-Retracts*, Duke Mathematical Journal, vol. 22 (1955), pp. 551-556.

A. Tang (1974), *Recursion theory and descriptive set theory in effectively given T_0 spaces*, Ph.D. thesis, Princeton Univ., Princeton, N.J.

A. Tang (1975a), *Borel sets in $P\omega$*, IRIA-Laboria, preprint.

A. Tang (1975b), *Notes on subsets on $P\omega$ with extra-finitary property*, IRIA, preprint.

A. Tang (1975c), *A hierarchy of B_δ sets in $P\omega$*, IRIA, preprint.

A. Tang (1975c), *Sets of the form $\{x \mid R(x) = T\}$ in $P\omega$*, IRIA, preprint.

A. Tang (1975d), *$\leq_e$ Degrees in P*, IRIA, preprint.

A. Tarski (1930), *On some Fundamental Concepts of Mathematics*; translated by J. H. Woodger in *Logic, Semantics, Metamathematics*, Cambridge, 1956, pp. 30–37.

A. Tarski (1955), *A lattice-theoretical fixpoint theorem and its applications*, Pacific J. Math., 5, pp. 285–309.

R. D. Tennent (1973), *Mathematical semantics and design of programming languages*, Ph.D. thesis, Univ. of Toronto. [Also: Tech. Rep. 59, Univ. of Toronto (1973).]

R. D. Tennent (1974a), *The mathematical semantics of programming languages*, Dept. of Computing and Information Sci., Queen's Univ., Kingston, Ontario, Canada (preprint).

R. D. Tennent (1974b), *A contribution to the development of PASCAL-like languages*, Tech. Rep. 74-25, Dept. of Computing and Information Sci., Queen's Univ., Kingston, Ontario, Canada.

R. D. Tennent (1975), *PASQUAL: A proposed generalization of PASCAL*, Tech. Rep. 75-32, Dept. of Computing and Information Sci., Queen's Univ., Kingston, Ontario, Canada.

J. Vuillemin (1973a), *Proof techniques for recursive programs*, IRIA—Laboria Rep.

J. Vuillemin (1973b), *Correct and optimal implementations of recursion in a simple programming language*, IRIA—Laboria Rep. 24.

C. P. Wadsworth (1971), *Semantics and pragmatics of the lambda-calculus*, D. Phil. thesis, Oxford Univ., Oxford, England.

C. P. Wadsworth (1975a), *The relation between lambda-expressions and their denotation*, Dept. of Systems and Information Sci., Syracuse Univ., Syracuse, N.Y. (preprint).

C. P. Wadsworth (1975b), *Approximate reduction and lambda-calculus models*, Dept. of Systems and Information Sci., Syracuse Univ., Syracuse, N.Y.

C. P. Wadsworth (1975c), *Some unusual λ-calculus numeral systems*, in preparation.

C. P. Wadsworth (to appear), *On the topological ordering in the D-model of the lambda-calculus*, in preparation.

E. G. Wagner (1971a), *Languages for defining sets in arbitrary algebras*, Proc. of the 11th IEEE Conf. on Switching and Automata Theory, pp. 192–201.

E. G. Wagner (1971b), *An algebraic theory of recursive definitions and recursive languages*, Proc. of the 3rd ACM Symp. on Theory of Computing.

E. G. Wagner (1974), *Notes on categories, algebras and programming languages*, Unpublished lecture notes, London.

M. Wand (1973), *Mathematical foundations of formal language theory*, MAC-TR-108, Project MAC, Mass. Inst. of Tech., Cambridge, Mass.

M. Wand (1974a), *An algebraic formulation of the Chomsky hierarchy*, Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 216–221.

M. Wand (1974b), *On the recursive specification of data types*, Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 222–225.

M. Wand (1974c), *Realizing data structures as lattices*, Tech. Rep. 11, Computer Sci. Dept., Indiana Univ.

M. Wand (1975), *Fixed-point constructions in order-enriched categories*, Tech. Rep. 23, Computer Sci. Dept., Indiana Univ.

P. Wegner and D. Lehmann (1972), *Algebraic and topological prerequisites to Scott's theory of computation*, Tech. Rep. 72-2, Dept. of Computer Sci., Hebrew Univ. of Jerusalem.

R. W. Weyrauch and R. Milner (1972), *Program correctness in a mechanized logic*. Proc. of the 1st USA-JAPAN Computer Conf., pp. 384–390.

J. B. Wright (1972), *Characterization of recursively enumerable sets*, J. Symbolic Logic, 37, pp. 507–511.