Domain Theory in Lean 4

Lars Warren Ericson[†], **Dana S. Scott**, **Vijay D'Silva**[‡], **Brian Milnes**[§]

October 2026
CMU-CS-26-140

School of Computer Science
Carnegie Mellon University
Pittsburgh, PA 15213

[†] Catskills Research Company, [‡] Google Research, [§] Unaffiliated

Keywords: Lean 4; formal verification; domain theory; continuous lattices; neighbourhood systems; information systems; Scott topology

Abstract

This document is a machine-checked Lean 4 formalization of Dana Scott's papers on domain theory: continuous lattices (1972), datatypes as lattices (1976), neighbourhood systems (1980), and information systems (1982), together with bridge theorems relating the lattice, neighbourhood, and information systems presentations.

Contents

1 Continuous Lattices (1972) ✓ **16**

1.1 Introduction ✓ . . . 16
1.2 Injective spaces ✓ . . . 17
1.2.1 Definition 1.1: Injective Space ✓ . . . 18
1.2.2 Proposition 1.2 ✓ . . . 19
1.2.3 Proposition 1.3 ✓ . . . 19
1.2.4 Powers of $\mathbb{O}$ are injective ✓ . . . 20
1.2.5 Proposition 1.4 ✓ . . . 21
1.2.6 Proposition 1.5 ✓ . . . 21
1.2.7 RetractSubspace ✓ . . . 22
1.2.8 Corollary 1.6 ✓ . . . 23
1.2.9 Corollary 1.7 ✓ . . . 23
1.2.10 Absolute retracts ✓ . . . 24
1.3 Continuous lattices ✓ . . . 25
1.3.1 Specialization order ✓ . . . 26
1.3.2 Way-below relation ✓ . . . 36
1.3.3 Continuous lattice ✓ . . . 40
1.3.4 Scott maps ✓ . . . 53
1.3.5 Proposition 2.8 ✓ . . . 61
1.3.6 Proposition 2.9 ✓ . . . 62
1.3.7 Proposition 2.10 ✓ . . . 64
1.3.8 Proposition 2.11 ✓ . . . 65
1.3.9 Proof of 2.9 ✓ . . . 66
1.3.10 Continuous lattice retraction ✓ . . . 67
1.3.11 Converse retraction ✓ . . . 69
1.3.12 Continuous lattice projection ✓ . . . 71
1.3.13 Converse projection ✓ . . . 76
1.3.14 Proof of 2.10 ✓ . . . 76
1.3.15 Proof of 2.11 ✓ . . . 78
1.4 Function spaces ✓ . . . 88
1.4.1 Induced pi topology on $C(X, Y)$ ✓ . . . 88
1.4.2 Definition 3.1: Function space ✓ . . . 89
1.4.3 Elements of $[D \to D']$ ✓ . . . 91
1.4.4 Step function (pointwise) ✓ . . . 102
1.4.5 Step map $\overrightarrow{e}\,[e, e']$ ✓ . . . 103
1.4.6 Proposition 3.2 ✓ . . . 105
1.4.7 Product topology on $[D \to D']$ ✓ . . . 106
1.4.8 Theorem 3.3 ✓ . . . 110
1.4.9 Corollary 3.4 ✓ . . . 111
1.4.10 Scott functional abstraction ✓ . . . 113
1.4.11 Proposition 3.5 ✓ . . . 116
1.4.12 Retractions and extensions ✓ . . . 117
1.4.13 Definition 3.6 ✓ . . . 119

1.4.14 Function-space retraction and projection ✓ . . . 120
1.4.15 Proposition 3.7 ✓ . . . 121
1.4.16 Scott subspace extension ✓ . . . 122
1.4.17 Proposition 3.8 ✓ . . . 125
1.4.18 Lemma 3.9 ✓ . . . 127
1.4.19 Proposition 3.10 ✓ . . . 129
1.4.20 Definition 3.11: Projection space ✓ . . . 133
1.4.21 Proposition 3.12 ✓ . . . 136
1.4.22 Proposition 3.13 ✓ . . . 137
1.4.23 Proposition 3.14 ✓ . . . 139
1.5 Inverse limits ✓ . . . 140
1.5.1 Compatibility ✓ . . . 140
1.5.2 InverseLimit ✓ . . . 141
1.5.3 Projections from the limit ✓ . . . 142
1.5.4 The mediating map ✓ . . . 142
1.5.5 Special inverse systems ✓ . . . 144
1.5.6 Projections along the tower ✓ . . . 144
1.5.7 Tower step adjunction ✓ . . . 146
1.5.8 Embeddings along the tower ✓ . . . 148
1.5.9 Coordinates of an embedding ✓ . . . 150
1.5.10 Embeddings into the limit ✓ . . . 152
1.5.11 Order on the inverse limit ✓ . . . 153
1.5.12 Strict order on the inverse limit ✓ . . . 155
1.5.13 The limit lattice ✓ . . . 157
1.5.14 Topology of the inverse limit ✓ . . . 168
1.5.15 Proposition 4.1 ✓ . . . 172
1.5.16 Proposition 4.2 ✓ . . . 173
1.5.17 Corollary 4.3 ✓ . . . 175
1.5.18 The function space tower . . . 176
1.5.19 The functorial form ✓ . . . 203
1.5.20 Application ✓ . . . 203
1.5.21 Two projections ✓ . . . 204
1.5.22 Embedding every space ✓ . . . 204
1.5.23 Other functors ✓ . . . 205
1.5.24 Subspaces of a limit ✓ . . . 206
1.6 Correction ✓ . . . 206

2 Datatypes as Lattices (1976) 208
2.1 Introduction . . . 208
2.1.1 Domain $\mathbf{P}\omega$ ✓ . . . 209
2.1.2 Multiple-valued integers ✓ . . . 210
2.2 Continuous functions . . . 211
2.2.1 Introduction ✓ . . . 211
2.2.2 Finite subsets and the enumeration e_n ✓ . . . 212
2.2.3 Cantor pairing of integer pairs (n, m) ✓ . . . 223
2.2.4 Basic open sets and continuity on $\mathbf{P}\omega$ ✓ . . . 228

2.2.5 Graphs of continuous functions ✓ . . . 237
2.2.6 Fixed points and least fixed points . . . 241
2.2.7 Extension and embedding of continuous maps . . . 247
2.3 Computability and definability . . . 256
2.3.1 Minimal and maximal extension ✓ . . . 257
2.3.2 Meaning ✓ . . . 258
2.3.3 The language LAMBDA ✓ . . . 260
2.3.4 Term avoidance (α) ✓ . . . 265
2.3.5 Theorem 2.1 — the continuity theorem ✓ . . . 266
2.3.6 Theorem 2.2 — the conversion theorem ✓ . . . 267
2.3.7 Theorem 2.3 — the reduction theorem ✓ . . . 269
2.3.8 Theorem 2.4 — the combinator theorem ✓ . . . 270
2.3.9 The combinator Y ✓ . . . 271
2.3.10 Theorem 2.5 — the first recursion theorem ✓ . . . 273
2.3.11 The graph model ✓ . . . 274
2.3.12 Sequences ✓ . . . 276
2.3.13 Distributive functions ✓ . . . 283
2.3.14 The definability theorem ✓ . . . 292
2.3.15 A law of Y ✓ . . . 310
2.4 Enumeration and degrees . . . 312
2.4.1 Introduction ✓ . . . 312
2.4.2 G-combinator tools ✓ . . . 314
2.4.3 Theorem 3.1 ✓ . . . 324
2.4.4 Application ✓ . . . 326
2.4.5 Unpairing ✓ . . . 328
2.4.6 Numerals ✓ . . . 330
2.4.7 Val rank ✓ . . . 331
2.4.8 Theorem 3.2 ✓ . . . 332
2.4.9 Recursion codes ✓ . . . 333
2.4.10 Plotkin helpers ✓ . . . 334
2.4.11 Theorem 3.3 ✓ . . . 336
2.4.12 Theorem 3.4 ✓ . . . 338
2.4.13 Theorem 3.5 ✓ . . . 340
2.4.14 Theorem 3.6 ✓ . . . 345
2.4.15 Theorem 3.7 ✓ . . . 348
2.5 Retracts and data types . . . 351
2.5.1 Introduction ✓ . . . 351
2.5.2 Graph lemmas ✓ . . . 353
2.5.3 Predecessor set ✓ . . . 353
2.5.4 Fixpoints ✓ . . . 354
2.5.5 Directed fixpoints ✓ . . . 355
2.5.6 Definition (retract) ✓ . . . 358
2.5.7 Theorem 4.1 ✓ . . . 366
2.5.8 u is in the range of retract a ✓ . . . 368
2.5.9 Definition (ordering) ✓ . . . 368

2.5.10 Open-set retract ✓ . . . 369
2.5.11 Theorem 4.2 ✓ . . . 369
2.5.12 Theorem 4.3 ✓ . . . 371
2.5.13 C combinators ✓ . . . 373
2.5.14 Pair mediation ✓ . . . 376
2.5.15 Theorem 4.4 ✓ . . . 376
2.5.16 Theorem 4.5 ✓ . . . 381
2.5.17 Expression interpreter ✓ . . . 384
2.5.18 Theorem 4.6 ✓ . . . 405
2.6 Closure operations and algebraic lattices . . . 410
2.6.1 Introduction ✓ . . . 410
2.6.2 Isolated ✓ . . . 411
2.6.3 Bottom ✓ . . . 411
2.6.4 Square pair ✓ . . . 412
2.6.5 Predecessor identities ✓ . . . 413
2.6.6 Directed finite cover ✓ . . . 414
2.6.7 Is compact ✓ . . . 414
2.6.8 Continuous basis ✓ . . . 415
2.6.9 Countably algebraic ✓ . . . 415
2.6.10 Representation ✓ . . . 418
2.6.11 Closure operation ✓ . . . 419
2.6.12 Theorem 5.1 — the algebraic lattice theorem ✓ . . . 421
2.6.13 Theorem 5.2 — the representation theorem ✓ . . . 421
2.6.14 Theorem 5.3 — the function space theorem ✓ . . . 423
2.6.15 Theorem 5.4 — the product and sum theorem ✓ . . . 424
2.6.16 Theorem 5.5 — the universe theorem ✓ . . . 425
2.6.17 Theorem 5.6 — the limit theorem ✓ . . . 426
2.7 Subsets and their classification . . . 428
2.7.1 Introduction ✓ . . . 428
2.7.2 Scott classes ✓ . . . 429
2.7.3 Characteristic maps ✓ . . . 431
2.7.4 Odd-even packing ✓ . . . 435
2.7.5 Pair indexing ✓ . . . 438
2.7.6 F∩Gδ packing ✓ . . . 440
2.7.7 Three-valued ✓ . . . 442
2.7.8 Boolean membership ✓ . . . 450
2.7.9 Theorem 6.1 — the G theorem ✓ . . . 453
2.7.10 Theorem 6.2 — the F theorem ✓ . . . 454
2.7.11 Theorem 6.3 — the Gδ theorem ✓ . . . 456
2.7.12 Theorem 6.4 — the F∩G theorem ✓ . . . 457
2.7.13 Theorem 6.5 — the F∩Gδ theorem ✓ . . . 460
2.7.14 Theorem 6.6 — the B theorem ✓ . . . 462
2.7.15 Theorem 6.7 — the Bδ theorem ✓ . . . 464
2.8 Total functions and functionality . . . 473
2.8.1 Introduction ✓ . . . 473

2.8.2 Pair elements ✓ . . . 474
2.8.3 Restricted equivalence relations ✓ . . . 476
2.8.4 Theorem 7.1 ✓ . . . 480
2.8.5 Theorem 7.2 ✓ . . . 481
2.8.6 Theorem 7.3 ✓ . . . 486
2.8.7 Theorem 7.4 ✓ . . . 493
2.9 Acknowledgements and references . . . 505

3 Neighborhood Systems (1980) 508
3.1 Introduction . . . 509
3.2 Domains given by neighbourhoods . . . 510
3.2.1 Introduction . . . 510
3.2.2 Definition 1.1 — neighbourhood system . . . 511
3.2.3 Factoid 1.1 — empty intersection is delta; recursive finite intersection . . . 512
3.2.4 Example 1.2 — two-token domain . . . 514
3.2.5 Example 1.3 — three-step chain . . . 520
3.2.6 Example 1.4 — finite binary tree . . . 526
3.2.7 Factoid 1.4a — nested or disjoint . . . 542
3.2.8 Example 1.5 — all nonempty subsets . . . 543
3.2.9 Factoid 1.5 — consistent iff nonempty; equivalent sequences same limit . . . 544
3.2.10 Definition 1.6 — ideal elements . . . 547
3.2.11 Definition 1.7 — principal filter . . . 548
3.2.12 Factoid 1.7 — principals are one-one; inclusion-reversing principals; union of principal filters . . . 548
3.2.13 Definition 1.8 — approximation and totality . . . 550
3.2.14 Factoid 1.8 — bottom element; bottom is least; finite filters are principal; prefix order; union of finite approximations . . . 550
3.2.15 Examples 1.2–1.5 (Revisited) — finite examples revisited . . . 553
3.2.16 Definition 1.9 — isomorphic domains . . . 558
3.2.17 Theorem 1.10 — basic open neighbourhoods . . . 558
3.2.18 Theorem 1.11 — intersections and directed unions . . . 565
3.2.19 Exercise 1.12 — final segments of integers . . . 569
3.2.20 Exercise 1.13 — infinite binary tree . . . 571
3.2.21 Exercise 1.14 — finite nonempty subsets . . . 573
3.2.22 Exercise 1.15 — finite elements without chains . . . 574
3.2.23 Exercise 1.16 — cofinite integer subsets . . . 578
3.2.24 Exercise 1.17 — rational open intervals . . . 581
3.2.25 Exercise 1.18 — consistency of neighbourhood families . . . 584
3.2.26 Exercise 1.19 — positive neighbourhood systems . . . 593
3.2.27 Exercise 1.20 — upward closed neighbourhoods . . . 602
3.2.28 Exercise 1.21 — complete neighbourhood systems . . . 607
3.2.29 Exercise 1.22 — topology of a domain . . . 613
3.2.30 Exercise 1.23 — decidable total elements . . . 614
3.2.31 Exercise 1.24 — extending partial elements . . . 619
3.2.32 Exercise 1.25 — final segments of ordinals . . . 620
3.2.33 Exercise 1.26 — ideals of a ring . . . 625

3.2.34 Exercise 1.27 — suprema of bounded sets . . . 630
3.3 Mappings between domains . . . 637
3.3.1 Introduction . . . 638
3.3.2 Definition 2.1 — approximable mapping . . . 638
3.3.3 Proposition 2.2 — elementwise action . . . 640
3.3.4 Example 2.3 — parity of leading zeros . . . 643
3.3.5 Example 2.4 — erase a run of ones . . . 647
3.3.6 Theorem 2.5 — category of approximable maps . . . 649
3.3.7 Proposition 2.6 — identity and composition . . . 652
3.3.8 Theorem 2.7 — isomorphisms are approximable . . . 653
3.3.9 Lecture II exercises . . . 656
3.3.10 Exercise 2.8 — determined by finite elements . . . 656
3.3.11 Exercise 2.9 — directed union formula . . . 657
3.3.12 Exercise 2.10 — intersection of two maps . . . 658
3.3.13 Exercise 2.11 — directed unions of elements . . . 659
3.3.14 Exercise 2.12 — directed unions of maps . . . 661
3.3.15 Exercise 2.13 — approximable means continuous . . . 662
3.3.16 Exercise 2.14 — isomorphisms of neighbourhoods . . . 668
3.3.17 Exercise 2.15 — opens classified by maps . . . 672
3.3.18 Exercise 2.16 — prefixing is approximable . . . 679
3.3.19 Exercise 2.17 — equations for erase-ones . . . 683
3.3.20 Exercise 2.17 — uniqueness of the erase-ones map . . . 685
3.3.21 Exercise 2.18 — doubling binary digits . . . 688
3.3.22 Exercise 2.19 — maps of two arguments . . . 695
3.3.23 Exercise 2.20 — powerset of the integers . . . 698
3.3.24 Exercise 2.21 — finite and infinite sequences . . . 704
3.3.25 Exercise 2.22 — domains from closure properties . . . 710
3.4 Domain constructs . . . 717
3.4.1 Introduction . . . 718
3.4.2 Definition 3.1 — product of systems . . . 718
3.4.3 Proposition 3.2 — elements of a product . . . 722
3.4.4 Definition 3.3 — projection mappings . . . 724
3.4.5 Proposition 3.4 — pairing and projections . . . 728
3.4.6 Theorem 3.5 — separate approximability . . . 729
3.4.7 Lemma 3.6 — constant functions . . . 731
3.4.8 Proposition 3.7 — closure under substitution . . . 733
3.4.9 Definition 3.8 — function space . . . 734
3.4.10 Proposition 3.9 — consistent step neighbourhoods . . . 738
3.4.11 Theorem 3.10 — elements are mappings . . . 741
3.4.12 Theorem 3.11 — evaluation combinator . . . 744
3.4.13 Theorem 3.12 — currying . . . 746
3.4.14 Theorem 3.13 — pointwise order of maps . . . 751
3.4.15 Exercise 3.14 — tagged product of tokens . . . 754
3.4.16 Exercise 3.15 — product isomorphisms . . . 756
3.4.17 Exercise 3.16 — infinite sequences of elements . . . 760

3.4.18 Exercise 3.17 — embedding binary sequences . . . 766
3.4.19 Exercise 3.18 — separated sum . . . 773
3.4.20 Exercise 3.19 — induced maps on constructs . . . 783
3.4.21 Exercise 3.20 — sum and product functors . . . 791
3.4.22 Exercise 3.21 — identity of step neighbourhoods . . . 792
3.4.23 Exercise 3.22 — composition combinator . . . 797
3.4.24 Exercise 3.23 — cartesian closed category . . . 802
3.4.25 Exercise 3.24 — function-space isomorphisms . . . 803
3.4.26 Exercise 3.25 — opens form a domain . . . 812
3.4.27 Exercise 3.26 — conditional combinator . . . 815
3.4.28 Exercise 3.27 — function space via closure . . . 838
3.4.29 Exercise 3.28 — minimal step function . . . 841
3.5 Fixed points and recursion . . . 843
3.5.1 Introduction . . . 844
3.5.2 Theorem 4.1 — least fixed point . . . 844
3.5.3 Theorem 4.2 — fix combinator . . . 847
3.5.4 Example 4.3 — partial functions on integers . . . 853
3.5.5 Example 4.4 — sequence domain . . . 861
3.5.6 Definition 4.5 — Peano axioms . . . 868
3.5.7 Theorem 4.6 — Peano models isomorphic . . . 870
3.5.8 Lecture IV exercises . . . 873
3.5.9 Exercise 4.7 — fixed point above a seed . . . 873
3.5.10 Exercise 4.8 — fixed-point induction . . . 877
3.5.11 Exercise 4.9 — fix as a fixed point . . . 880
3.5.12 Exercise 4.10 — domain above an element . . . 893
3.5.13 Exercise 4.11 — characterizing the fix combinator . . . 900
3.5.14 Exercise 4.12 — no greatest fixed point . . . 904
3.5.15 Exercise 4.13 — avoiding the natural numbers . . . 908
3.5.16 Exercise 4.14 — greatest powerset fixed point . . . 916
3.5.17 Exercise 4.15 — maximal fixed points . . . 918
3.5.18 Exercise 4.16 — optimal fixed point . . . 922
3.5.19 Exercise 4.17 — generated submonoid . . . 930
3.5.20 Exercise 4.18 — checking the number domain . . . 933
3.5.21 Exercise 4.19 — Peano axioms for sequences . . . 940
3.5.22 Exercise 4.20 — fix of a composite . . . 949
3.5.23 Exercise 4.21 — order as a fixed point . . . 950
3.5.24 Exercise 4.22 — inductive subset of a model . . . 956
3.5.25 Exercise 4.23 — commuting with the iterates . . . 958
3.5.26 Exercise 4.24 — Schroeder-Bernstein theorem . . . 961
3.5.27 Exercise 4.25 — unary sequence domain . . . 963
3.6 Typed λ-calculus . . . 968
3.6.1 Introduction . . . 969
3.6.2 Theorem 5.1 — terms denote approximable maps . . . 973
3.6.3 Theorem 5.2 — beta conversion . . . 974
3.6.4 Proposition 5.3 — simultaneous fixed points . . . 977

3.6.5 Proposition 5.4 — fixed point under a parameter . . . 980
3.6.6 Table 5.5 — table of combinators . . . 982
3.6.7 Theorem 5.6 — partial recursive functions . . . 987
3.6.8 Exercise 5.7 — currying the lambda notation . . . 1017
3.6.9 Exercise 5.8 — combinatory completeness . . . 1018
3.6.10 Exercise 5.9 — common fixed points . . . 1021
3.6.11 Exercise 5.10 — smash product . . . 1022
3.6.12 Exercise 5.11 — stack combinators . . . 1036
3.6.13 Exercise 5.12 — while combinator . . . 1040
3.6.14 Exercise 5.13 — pairing function on numbers . . . 1043
3.6.15 Exercise 5.13 — powerset isomorphisms . . . 1046
3.6.16 Exercise 5.14 — functions as graphs . . . 1047
3.6.17 Exercise 5.15 — star of a word . . . 1051
3.6.18 Exercise 5.16 — negation of sequences . . . 1056
3.7 Domain equations . . . 1073
3.7.1 Introduction . . . 1073
3.7.2 Example 6.1 — indefinite product . . . 1074
3.7.3 Example 6.2 — sequence domain equations . . . 1081
3.7.4 Definition 6.3 — functor . . . 1112
3.7.5 Definition 6.4 — algebra for a functor . . . 1113
3.7.6 Definition 6.5 — initial algebra . . . 1115
3.7.7 Proposition 6.6 — uniqueness of initial algebras . . . 1117
3.7.8 Proposition 6.7 — functor preserves initiality . . . 1120
3.7.9 Definition 6.8 — continuity on maps . . . 1122
3.7.10 Theorem 6.9 — homomorphism from initial algebra . . . 1123
3.7.11 Definition 6.10 — subdomain . . . 1133
3.7.12 Proposition 6.11 — lattice of subsystems . . . 1136
3.7.13 Proposition 6.12 — projection pair . . . 1140
3.7.14 Definition 6.13 — continuity on domains . . . 1141
3.7.15 Theorem 6.14 — existence of initial algebras . . . 1148
3.7.16 Lemma 6.15 — subdomains from projection pairs . . . 1161
3.7.17 Theorem 6.16 — initial algebra is minimal . . . 1166
3.7.18 Lecture VI exercises . . . 1182
3.7.19 Exercise 6.17 — algebras for sequence domains . . . 1182
3.7.20 Exercise 6.18 — infinite product as initial . . . 1234
3.7.21 Exercise 6.19 — strict sum and product . . . 1241
3.7.22 Exercise 6.20 — tokens of a functor . . . 1255
3.7.23 Exercise 6.21 — coalesced sum and smash . . . 1262
3.7.24 Exercise 6.22 — equations for the integers . . . 1283
3.7.25 Exercise 6.23 — syntactic expression domain . . . 1302
3.7.26 Exercise 6.24 — recursive domain equations . . . 1309
3.7.27 Exercise 6.25 — projection pair laws . . . 1310
3.7.28 Exercise 6.26 — lifting a domain . . . 1328
3.7.29 Exercise 6.27 — which embeddings hold . . . 1349
3.7.30 Exercise 6.28 — finite embeddings cancel . . . 1367

3.7.31 Exercise 6.29 — infinitary sum and product . . . 1370
3.8 Computability in effectively given domains . . . 1390
3.8.1 Introduction . . . 1390
3.8.2 Definition 7.1 — computable presentation . . . 1391
3.8.3 Definition 7.2 — computable mapping . . . 1485
3.8.4 Proposition 7.3 — computable maps form a category . . . 1486
3.8.5 Theorem 7.4 — sum and product effective . . . 1488
3.8.6 Theorem 7.5 — function space effective . . . 1538
3.8.7 Theorem 7.6 — fix is computable . . . 1558
3.8.8 Proposition 7.7 — lists effectively given . . . 1589
3.8.9 Example 7.8 — powerset effectively given . . . 1604
3.8.10 Definition 7.9 — power domain . . . 1606
3.8.11 Proposition 7.10 — power domain effective . . . 1609
3.8.12 Definition 7.11 — finite sets of elements . . . 1617
3.8.13 Proposition 7.12 — finite sets are approximable . . . 1619
3.8.14 Lecture VII exercises . . . 1686
3.8.15 Exercise 7.13 — axiomatic neighbourhood structure . . . 1686
3.8.16 Exercise 7.14 — primitive recursive witnesses . . . 1693
3.8.17 Exercise 7.15 — further constructs effective . . . 1699
3.8.18 Exercise 7.16 — curry as an enumeration . . . 1734
3.8.19 Exercise 7.17 — recursion over lists . . . 1749
3.8.20 Exercise 7.18 — effective isomorphism . . . 1765
3.8.21 Exercise 7.19 — power domain functor . . . 1768
3.8.22 Exercise 7.20 — union on power domains . . . 1792
3.8.23 Exercise 7.21 — distributing the power domain . . . 1805
3.8.24 Exercise 7.22 — domain of formal languages . . . 1824
3.8.25 Exercise 7.23 — graph and fun computable . . . 1857
3.8.26 Exercise 7.24 — LUCID history domain . . . 1888
3.9 Retracts of the universal domain . . . 1930
3.9.1 Introduction . . . 1931
3.9.2 Definition 8.1 — retraction . . . 1931
3.9.3 Proposition 8.2 — retractions from subdomains . . . 1933
3.9.4 Definition 8.3 — projections . . . 1936
3.9.5 Examples 8.4 — check, fade, and smash . . . 1937
3.9.6 Theorem 8.5 — finitary projection test . . . 1960
3.9.7 Theorem 8.6 — sub combinator . . . 1964
3.9.8 Definition 8.7 — interval presentation of U . . . 1981
3.9.9 Theorem 8.8 — universality of U . . . 2000
3.9.10 Definition 8.9 — constructs on projections . . . 2022
3.9.11 Proposition 8.10 — constructs preserve projections . . . 2026
3.9.12 Lecture VIII exercises . . . 2032
3.9.13 Exercise 8.11 — retraction on intervals . . . 2032
3.9.14 Exercise 8.12 — integer presentation of U . . . 2041
3.9.15 Exercise 8.13 — Boolean-algebra filters . . . 2078
3.9.16 Exercise 8.14 — closure operators . . . 2079

3.9.17 Exercise 8.15 — domain of subsystems . . . 2087
3.9.18 Exercise 8.16 — order of projections . . . 2093
3.9.19 Exercise 8.17 — explicit embeddings into U . . . 2094
3.9.20 Exercise 8.18 — missing proofs of 8.10 . . . 2096
3.9.21 Exercise 8.19 — closure under sum and product . . . 2097
3.9.22 Exercise 8.20 — self-embeddings of a domain . . . 2098
3.9.23 Exercise 8.21 — lists of a projection . . . 2098
3.9.24 Exercise 8.22 — comparing B and C . . . 2099
3.9.25 Exercise 8.23 — initial algebra inside U . . . 2108
3.9.26 Exercise 8.24 — coupled domain equations . . . 2109
3.9.27 Exercise 8.25 — reflexive function space . . . 2109
3.9.28 Exercise 8.26 — untyped calculus in U . . . 2506
3.9.29 Exercise 8.27 — infinite cartesian products . . . 2508

4 Information Systems (1982) 2521
4.1 Introduction . . . 2521
4.2 Information systems . . . 2523
4.3 The elements of a system . . . 2532
4.4 Domains as lattices and as topological spaces . . . 2550
4.5 Approximable mappings between domains . . . 2554
4.6 Products and sums of domains . . . 2555
4.7 The function space as a domain . . . 2556
4.8 Some domain equations . . . 2676
4.8.1 Factoid 8.1 . . . 2677
4.8.2 Factoid 8.2 . . . 2728
4.8.3 Factoid 8.3 . . . 2866
4.8.4 Factoid 8.4 . . . 2901

5 Bridge Theorems 2903
5.1 Introduction . . . 2903
5.2 Catalog of bridge theorems . . . 2904
5.3 Proof notes . . . 2906
5.3.1 Continuous lattices → neighbourhood systems . . . 2906
5.3.2 Neighbourhood systems → information systems . . . 2907
5.3.3 Information systems → neighbourhood systems . . . 2907
5.3.4 Information systems → ideal completion . . . 2907
5.3.5 Algebraic complete lattices → continuous lattices . . . 2907
5.3.6 Three-presentation equivalence (`presentation_domains_equiv`) . . . 2908
5.3.7 Constructions (`infoSys_constructions_equiv`) . . . 2908
5.4 Constructivity summary . . . 3009
5.5 Worked example — S-expressions / trees . . . 3009
5.5.1 Overview . . . 3010
5.5.2 Information system (1982) . . . 3010
5.5.3 Neighbourhood system (1980) . . . 3010
5.5.4 Continuous lattice (1972) . . . 3011
5.5.5 Equivalence for this instance . . . 3011

5.5.6 Domain equation and morphisms . . . 3011
5.6 ContinuousLatticeToNeighborhood . . . 3386
5.7 InfoSysConstructions . . . 3387
5.8 InfoSysToIdealCompletion . . . 3387
5.9 InfoSysToNeighborhood . . . 3387
5.10 NeighborhoodToInfoSys . . . 3388
5.11 PresentationDomains . . . 3388

6 Acknowledgments **3389**
6.1 AI-assisted development . . . 3389
6.2 Artifact availability and reproducibility . . . 3389

7 References **3390**

List of Figures

1 Domain Theory in Lean 4. . . . 15
2 Continuous Lattices (1972) ✓. . . . 16
3 Injective spaces ✓. . . . 17
4 Injective extension: X subspace of Y, continuous maps f from X to D and f bar from Y to D. 18
5 Extension triangle: X to Y by e, f from X to O, dashed f bar from Y to O. . . . 25
6 Continuous lattices ✓. . . . 26
7 Specialization order ✓. . . . 26
8 Way-below relation ✓. . . . 36
9 Continuous lattice ✓. . . . 40
10 Scott maps ✓. . . . 53
11 Function spaces ✓. . . . 88
12 D arrow i to D prime, arrow j back; solid f from D to D double prime; dashed arrow from D prime to D double prime labeled f tilde equals f compose j 118
13 Lemma 3.9 diagram. Top: X to Y by e. Left: f down to D. Right: g bar down to D prime. Diagonals cross: g from X to D prime, f bar from Y to D. Bottom: i from D to D prime and j back. . . . 127
14 Inverse limits ✓. . . . 140
15 The limit lattice ✓. . . . 157
16 The function space tower. . . . 176
17 The projection on a function space. . . . 180
18 Proof that the limit and its function space are inverse. . . . 184
19 Two j0 projections; D0 on rows 2-3; arrows touch circles. . . . 204
20 Push-out square: D and D prime map up into D plus D prime, and 0 maps left to D and up to D prime. . . . 205
21 Datatypes as Lattices (1976). . . . 208
22 Continuous functions. . . . 211
23 Finite subsets and the enumeration e_n ✓. . . . 214
24 Basic open sets and continuity on $\mathbf{P}\omega$ ✓. . . . 228
25 Graphs of continuous functions ✓. . . . 238
26 Fixed points and least fixed points. . . . 241
27 Extension and embedding of continuous maps. . . . 252
28 Computability and definability. . . . 257
29 The definability theorem ✓. . . . 292
30 Enumeration and degrees. . . . 312
31 G-combinator tools ✓. . . . 314
32 Retracts and data types. . . . 351
33 Directed fixpoints ✓. . . . 355
34 Definition (retract) ✓. . . . 358
35 Closure operations and algebraic lattices. . . . 410
36 Subsets and their classification. . . . 428
37 Total functions and functionality. . . . 473
38 Neighborhood Systems (1980). . . . 508
39 Domains given by neighbourhoods. . . . 510

40 Mappings between domains. . . . 638
41 Domain constructs. . . . 718
42 Fixed points and recursion. . . . 844
43 Typed λ-calculus. . . . 969
44 Domain equations. . . . 1073
45 Computability in effectively given domains. . . . 1390
46 Retracts of the universal domain. . . . 1931
47 Information Systems (1982). . . . 2521
48 Information systems. . . . 2524
49 The elements of a system. . . . 2532
50 Domains as lattices and as topological spaces. . . . 2550
51 Approximable mappings between domains. . . . 2554
52 Products and sums of domains. . . . 2555
53 The function space as a domain. . . . 2556
54 Some domain equations. . . . 2677
55 Bridge Theorems. . . . 2903
56 Introduction. . . . 2904
57 Lean module map. . . . 2906
58 Worked example — S-expressions / trees. . . . 3009
59 ContinuousLatticeToNeighborhood. . . . 3386
60 InfoSysConstructions. . . . 3387
61 InfoSysToIdealCompletion. . . . 3387
62 InfoSysToNeighborhood. . . . 3388
63 NeighborhoodToInfoSys. . . . 3388
64 PresentationDomains. . . . 3388

Dependency diagram. The four papers stand on their own. The bridge theorems import continuous lattices, neighborhood systems, and information systems. Each box is one chapter. The arrowhead is on the chapter that imports. The number is how many direct imports. Datatypes as lattices and the references have no arrow.

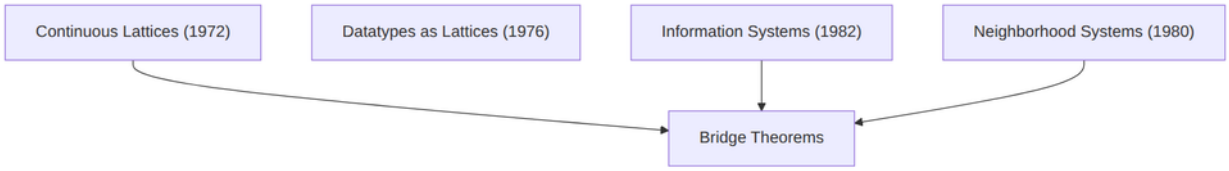

Figure 1: Domain Theory in Lean 4.

1 Continuous Lattices (1972) ✓

Starting from the topological point of view a certain wide class of T_0-spaces is introduced having a very strong extension property for continuous functions with values in these spaces. It is then shown that all such spaces are complete lattices whose lattice structure determines the topology - these are the *continuous lattices* - and every such lattice has the extension property. With this foundation the lattices are studied in detail with respect to projections, subspaces, embeddings, and constructions such as products, sums, function spaces, and inverse limits. The main result of the paper is a proof that every topological space can be embedded in a continuous lattice which is homeomorphic (and isomorphic) to its own function space. The function algebra of such spaces provides mathematical models for the Church-Curry λ-calculus.

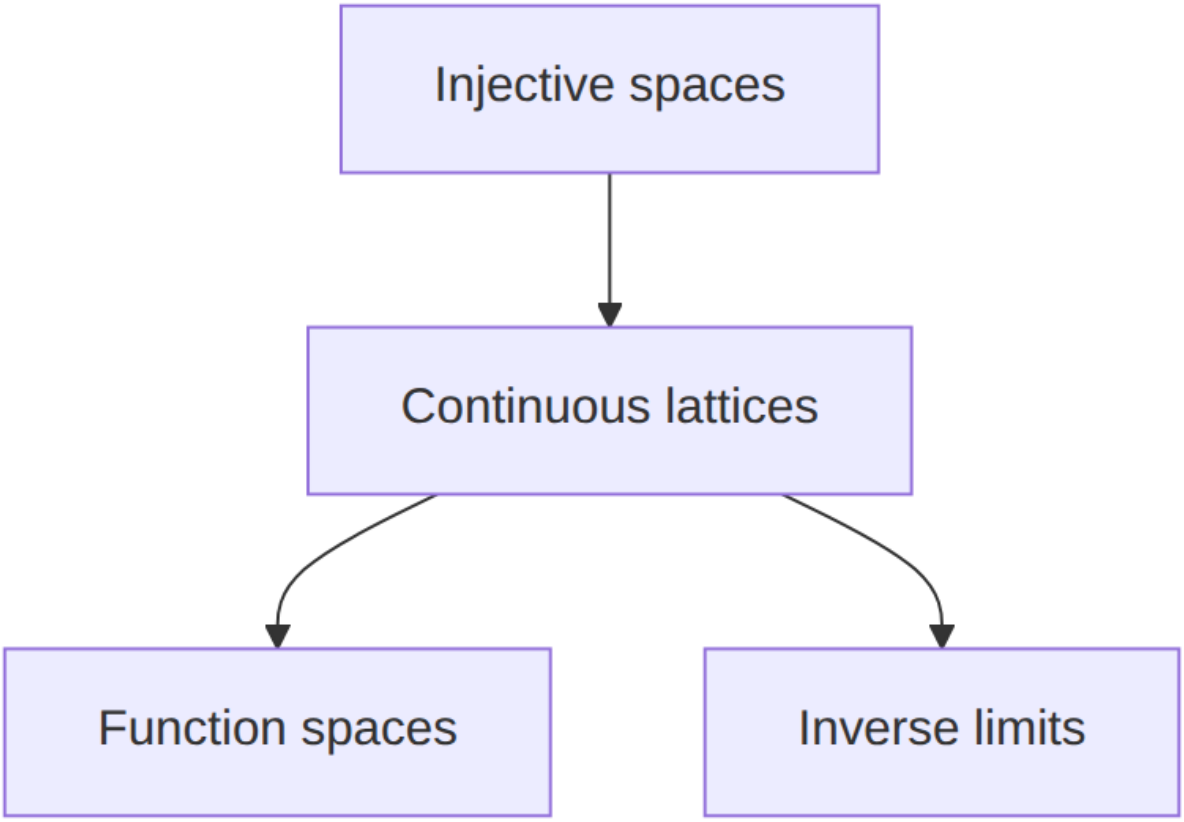

Figure 2: Continuous Lattices (1972) ✓.

1.1 Introduction ✓

Through a roundabout chain of mathematical events I have become interested in T_0-spaces, those topological spaces satisfying the weakest separation axiom to the effect that two distinct points cannot share the same system of open neighborhoods. These spaces seem to have been originally suggested by Kolmogoroff and were introduced first in Alexandroff and Hopf (1935). Subsequent topology textbooks have dutifully recorded the definition but without much enthusiasm: mainly the idea is introduced to provide exercises. In the book Čech (1966) for example, T_0-spaces are called *feebly semi-separated spaces*, which surely

is a term expressing mild contempt. Some interest has been shown in finite T_0-spaces (finite T_1-spaces are necessarily discrete), but generally topology seems to go better under at least the Hausdorff separation axiom. The reason for this is no doubt the strong motivation we get from geometry, where points *are* points and where distinct points *can* be separated.

What I hope to show in this paper is that from a less geometric point of view T_0-spaces can be not only interesting but also natural. The interest for me lies in the construction of *function spaces*, and the main result is the production of a large number of T_0-spaces D such that D and $[D \to D]$ are *homeomorphic*. Here $[D \to D]$ is the space of all continuous functions from D into D with the topology of pointwise convergence (the product topology). It will be shown that every space can be embedded in such a space D, and that D can be chosen to have quite strong extension properties for D-valued continuous functions. These properties make D most convenient for applications to logic and recursive function theory, which was the author's original motivation. Some of the facts about these spaces seem to be most easily proved with the aid of some lattice theory, a circumstance that throws new light on the connections between topology and lattices. In fact, the required spaces are at the same time complete lattices whose topology is determined by the lattice structure in a special way, whence my title.

1.2 Injective spaces ✓

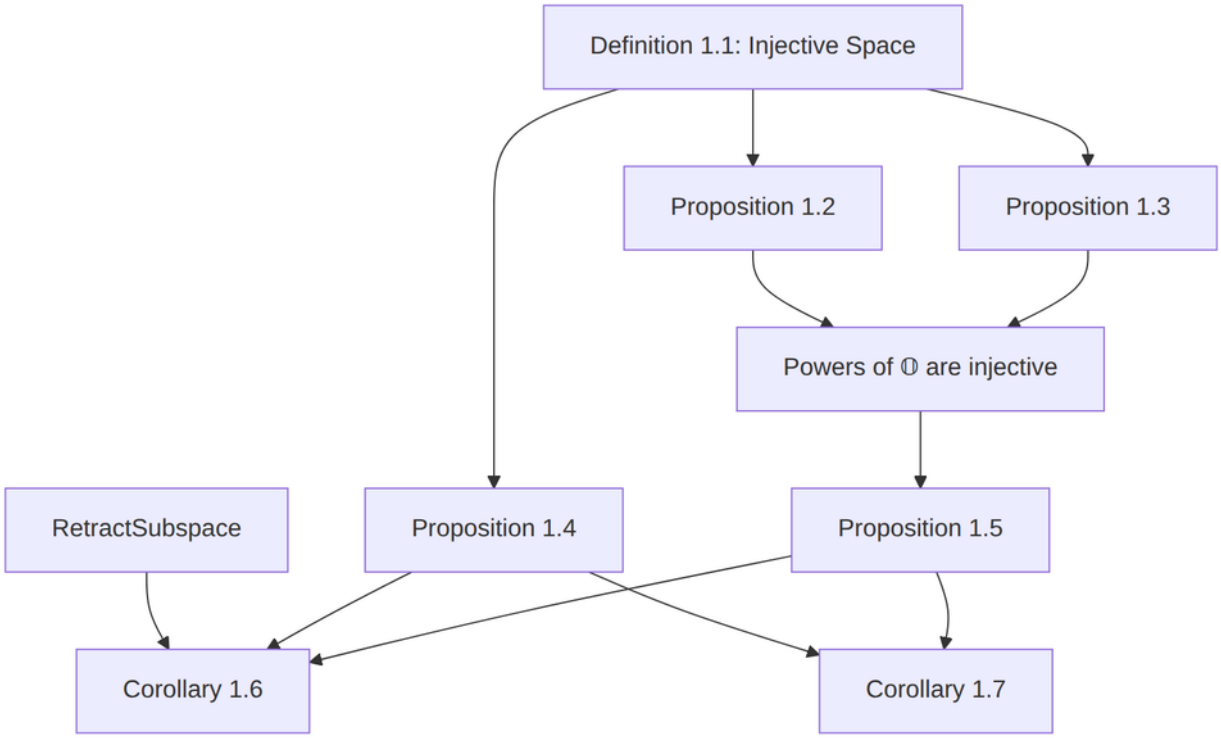

Figure 3: Injective spaces ✓.

All spaces are T_0-spaces, and we begin by defining a class of spaces to be called *injective*.

1.2.1 Definition 1.1: Injective Space ✓

1.1 Definition. A T_0-space D is *injective* iff for arbitrary spaces X and Y if $X \subseteq Y$ as a subspace, then every continuous function $f : X \to D$ can be extended to a continuous function $\bar{f} : Y \to D$. As a diagram we have:

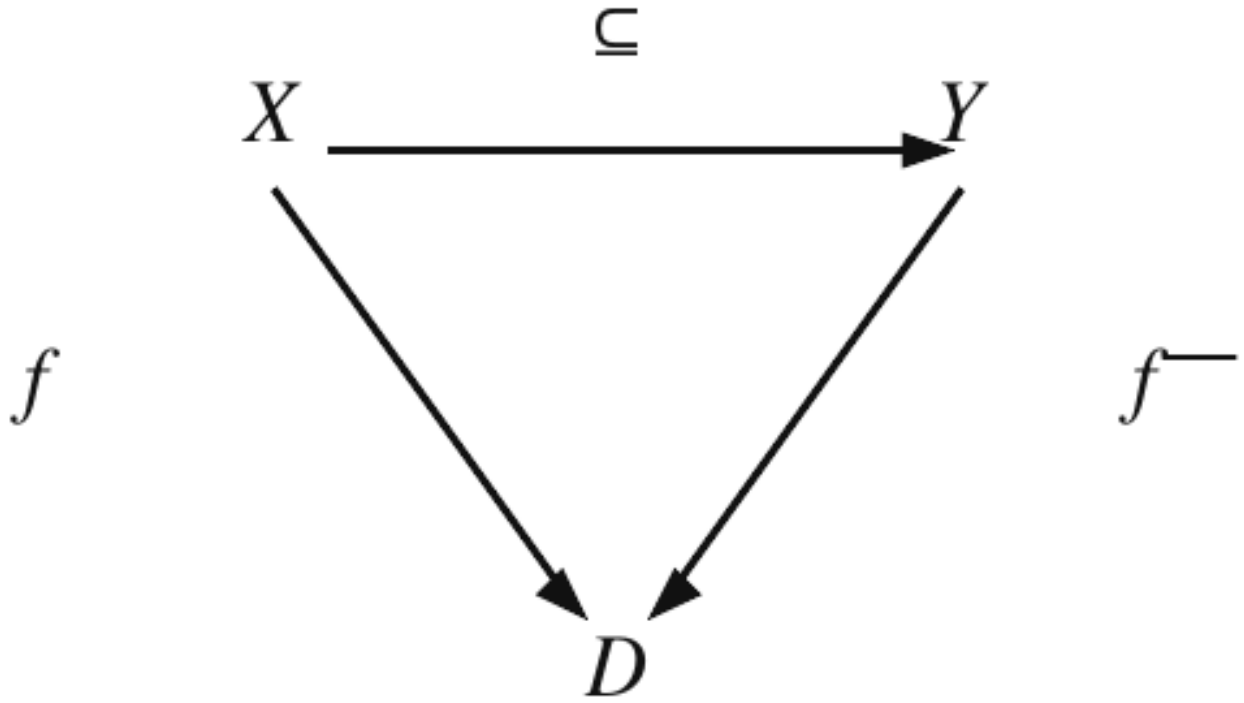

Figure 4: Injective extension: X subspace of Y, continuous maps f from X to D and f bar from Y to D.

Some people will object to this terminology because I use the subspace relationship rather than a monomorphism in the category of T_0-spaces and continuous maps. However, only the trivial 1-point space is injective in the sense of monomorphisms in that category, and so the notion is uninteresting. If the reader prefers another terminology, I do not mind. As we shall see these spaces have very strong retraction properties.

InjectiveSpace.lean

```
module

public import Mathlib.Topology.ContinuousMap.Basic
public import Mathlib.Topology.Maps.Basic

@[expose] public section

open Topology TopologicalSpace
```

```
universe u v

class InjectiveSpace (D : Type v) [TopologicalSpace D] : Prop where
  extension :
    ∀ {X Y : Type u} [TopologicalSpace X] [TopologicalSpace Y] (e : X → Y),
      IsEmbedding e → ∀ f : C(X, D), ∃ g : C(Y, D), ∀ x, g (e x) = f x
```

1.2.2 Proposition 1.2 ✓

A slightly less trivial example of an injective space is the 2-point space $\mathbb{O}$ with "points" $\bot$ and $\top$ where $\top$ is open but $\bot$ is not. (This space is sometimes called the *Sierpinski Space*.)

1.2 Proposition. The space $\mathbb{O}$ is injective.

Proof: As is obvious, the continuous maps $f : X \to \mathbb{O}$ are in a one-one correspondence with the open subsets of X (consider $f^{-1}(\top)$). If $X \subseteq Y$ as a subspace, then an open subset of X is the restriction of some open subset of Y. Thus any $f : X \to \mathbb{O}$ can be extended to $\bar{f} : Y \to \mathbb{O}$. □

proposition_1_2.lean

```
module

public import DomainTheory.ContinuousLattice.Injective.InjectiveSpace
public import Mathlib.Topology.ContinuousMap.Basic
public import Mathlib.Topology.Defs.Basic

@[expose] public section

open Topology TopologicalSpace

universe u

abbrev Sierpinski := Prop

theorem proposition_1_2 : InjectiveSpace.{u} Sierpinski := by
  constructor
  intro X Y _ _ e he f
  have hfopen : IsOpen {x | f x} := continuous_Prop.1 f.continuous
  rw [he.isInducing.isOpen_iff] at hfopen
  obtain ⟨V, hVopen, hVeq⟩ := hfopen
  refine ⟨⟨fun y => y ∈ V, continuous_Prop.2 hVopen⟩, fun x => ?_⟩
  have : (e x ∈ V) = (x ∈ {x | f x}) := by rw [← hVeq]; rfl
  simpa using this
```

1.2.3 Proposition 1.3 ✓

1.3 Proposition. The Cartesian product of any number of injective spaces is injective under the product topology.

Proof: The argument is standard. A map into the product can be projected onto each of the factors. Each of these projections can be extended. Then the separate maps can be put together again to make the required extended map into the product. □

We now have a large number of injective spaces, and further examples could be found using the next fact.

proposition_1_3.lean

```
module

public import DomainTheory.ContinuousLattice.Injective.InjectiveSpace
public import Mathlib.Topology.Constructions
public import Mathlib.Topology.ContinuousMap.Basic

@[expose] public section

open Topology TopologicalSpace

universe u v w

theorem proposition_1_3 {ι : Type w} (D : ι → Type v) [∀ i, TopologicalSpace (D i)]
    (h : ∀ i, InjectiveSpace.{u} (D i)) : InjectiveSpace.{u} (∀ i, D i) := by
  constructor
  intro X Y _ _ e he f
  choose g hg using fun i =>
    (h i).extension e he ⟨fun x => f x i, (continuous_apply i).comp f.continuous⟩
  refine ⟨⟨fun y i => g i y, continuous_pi fun i => (g i).continuous⟩, fun x => ?_⟩
  funext i
  exact hg i x
```

1.2.4 Powers of $\mathbb{O}$ are injective ✓

Lemma. Powers of $\mathbb{O}$ are injective.

Proof. Let I be any index set and let

$$D = \mathbb{O}^I$$

be the Cartesian power of the two-point space $\mathbb{O}$ with the product topology. Each factor $\mathbb{O}$ is injective by **1.2**. By **1.3**, the product of injective spaces is injective under the product topology, so D is injective. □

Proposition 1.5 applies this lemma with $I = \mathfrak{O}$, the open subsets of the given T_0-space.

isInjectiveSpace_sierpinski_power.lean

```
module

public import DomainTheory.ContinuousLattice.Injective.InjectiveSpace
public import Mathlib.Topology.Constructions
import DomainTheory.ContinuousLattice.Injective.proposition_1_2
import DomainTheory.ContinuousLattice.Injective.proposition_1_3

@[expose] public section

open Topology TopologicalSpace

universe w

theorem isInjectiveSpace_sierpinski_power (ι : Type w) :
    InjectiveSpace.{u} (ι → Prop) :=
  proposition_1_3 (fun (_ : ι) => Prop) (fun _ => proposition_1_2)
```

1.2.5 Proposition 1.4 ✓

1.4 Proposition. A retract of an injective space is injective.

Proof: Let D be injective. By a retract of D we understand a subspace $D' \subseteq D$ for which there exists a retraction map $j : D \to D'$ such that

$$D' = \{x \in D : j(x) = x\}.$$

Then if $f : X \to D'$ and $X \subseteq Y$, we have $f : X \to D$ as a continuous map also. Taking $\bar{f} : Y \to D$, we have only to form

$$j \circ \bar{f} : Y \to D'$$

to show that D' is injective. □

The relationship between arbitrary T_0-spaces and the injective spaces is given by the embedding theorem.

proposition_1_4.lean

```
module

public import DomainTheory.ContinuousLattice.Injective.InjectiveSpace
public import Mathlib.Topology.ContinuousMap.Basic
public import Mathlib.Topology.Defs.Basic

@[expose] public section

open Topology TopologicalSpace

universe u v

theorem proposition_1_4 {D : Type v} {D' : Type v} [TopologicalSpace D] [
    TopologicalSpace D']
    (hD : InjectiveSpace.{u} D) (s : C(D', D)) (r : C(D, D')) (hrs : ∀ d, r (s d) = d)
    :
    InjectiveSpace.{u} D' := by
  constructor
  intro X Y _ _ e he f
  obtain ⟨g, hg⟩ := hD.extension e he (s.comp f)
  refine ⟨r.comp g, fun x => ?_⟩
  show r (g (e x)) = f x
  rw [hg x]
  exact hrs (f x)
```

1.2.6 Proposition 1.5 ✓

1.5 Proposition. Every T_0-space can be embedded in an injective space; in fact, in a Cartesian power of the 2-element space $\mathbb{O}$.

Proof: The proof is well known (cf. Čech (1966), Theorem 26B.9, p. 484.) But we give the argument for completeness sake. Let X be the given space, and let $\mathfrak{O}$ be the class of open subsets of X. Let

$$D = \mathbb{O}^{\mathfrak{O}}$$

be the Cartesian power of $\mathbb{O}$. Then D is injective by 1.3. Define the map $e : X \to D$ by:

$$e(x)(U) = \begin{cases} \top & \text{if } x \in U, \\ \bot & \text{if } x \notin U, \end{cases}$$

for $x \in X$ and $U \in \mathfrak{O}$. This map e is continuous in view of the topology given to $\mathbb{O}$ and to D. The map e is one-one, because X is T_0. Finally, if $U \subseteq X$ is open, then

$$e(U) = e(x) : x \in U \quad = e(x) : e(x)(U) = \top = e(X) \cap t \in D : t(U) \in \top,$$

which shows that the image $e(U)$ is open in the subspace $e(X) \subseteq D$. Therefore $e : X \to D$ is an embedding of X as a subspace in D. □

proposition_1_5.lean

```
module

public import Mathlib.Topology.ContinuousMap.T0Sierpinski
public import DomainTheory.ContinuousLattice.Injective.InjectiveSpace
import DomainTheory.ContinuousLattice.Injective.isInjectiveSpace_sierpinski_power

@[expose] public section

open Topology TopologicalSpace

universe u

theorem proposition_1_5 (X : Type u) [TopologicalSpace X] [T0Space X] :
    InjectiveSpace.{u,u} (Opens X → Prop) ∧
      IsEmbedding (productOfMemOpens X) := by
  refine ⟨?_, productOfMemOpens_isEmbedding X⟩
  exact isInjectiveSpace_sierpinski_power (Opens X)
```

1.2.7 RetractSubspace ✓

Corollary 1.6 characterizes injective spaces as retracts of powers of $\mathbb{O}$. The Lean development packages "D is a subspace of a larger space and the inclusion splits by a continuous retraction" as `RetractSubspace D' D`: a continuous section `D' → D` that is an embedding, together with a retraction `D → D'` fixing the subspace pointwise.

Corollary 1.6 then states that `D` is injective if and only if it is such a retract of some power `ι → Prop`.

RetractSubspace.lean

```
module

public import Mathlib.Topology.ContinuousMap.Defs
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Order.CompleteLattice.Basic

@[expose] public section

universe u
```

```
open Topology TopologicalSpace

structure RetractSubspace (D' D : Type u) [TopologicalSpace D'] [TopologicalSpace D]
    where
  section' : C(D', D)
  isEmbedding_section : IsEmbedding section'
  retraction : C(D, D')
  retraction_section : ∀ d, retraction (section' d) = d
```

1.2.8 Corollary 1.6 ✓

1.6 Corollary. The injective spaces are exactly the retracts of the Cartesian powers of $\mathbb{O}$.

Proof: Such a retract is injective by 1.4. If D is injective, then it is (homeomorphic to) a subspace of a power of $\mathbb{O}$. But since D is injective the identity function on the subspace to itself can be extended to the whole of the power of $\mathbb{O}$ providing the required retraction. □

corollary_1_6.lean

```
module

public import DomainTheory.ContinuousLattice.Injective.RetractSubspace
public import DomainTheory.ContinuousLattice.Injective.InjectiveSpace
public import Mathlib.Topology.Separation.Basic
import DomainTheory.ContinuousLattice.Injective.isInjectiveSpace_sierpinski_power
import DomainTheory.ContinuousLattice.Injective.proposition_1_4
import DomainTheory.ContinuousLattice.Injective.proposition_1_5

@[expose] public section

open Topology TopologicalSpace

universe u

theorem corollary_1_6 (D : Type u) [TopologicalSpace D] [T0Space D] :
    InjectiveSpace.{u,u} D ↔ ∃ (ι : Type u), Nonempty (RetractSubspace D (ι → Prop))
    := by
  constructor
  · intro hD
    obtain ⟨r, hr⟩ := hD.extension (productOfMemOpens D) (proposition_1_5 D).2 (
    ContinuousMap.id D)
    refine ⟨Opens D, ⟨⟨productOfMemOpens D, (proposition_1_5 D).2, r, hr⟩⟩⟩
  · rintro ⟨ι, ⟨R⟩⟩
    exact proposition_1_4 (isInjectiveSpace_sierpinski_power ι) R.section' R.retraction
      R.retraction_section
```

1.2.9 Corollary 1.7 ✓

1.7 Corollary. A space is injective iff it is a retract of every space of which it is a subspace.

Proof: As in the proof of 1.6, this property is obvious for injective spaces. But in view of 1.5 every such space is a retract of a power of $\mathbb{O}$ and hence is injective. □

corollary_1_7.lean

```
module

public import DomainTheory.ContinuousLattice.Injective.InjectiveSpace
public import Mathlib.Topology.Separation.Basic
import DomainTheory.ContinuousLattice.Injective.isInjectiveSpace_sierpinski_power
import DomainTheory.ContinuousLattice.Injective.proposition_1_4
import DomainTheory.ContinuousLattice.Injective.proposition_1_5

@[expose] public section

open Topology TopologicalSpace

universe u

theorem corollary_1_7 (D : Type u) [TopologicalSpace D] [T0Space D] :
    InjectiveSpace.{u,u} D ↔
      ∀ {Y : Type u} [TopologicalSpace Y] (e : D → Y), IsEmbedding e →
        ∃ r : C(Y, D), ∀ d, r (e d) = d := by
  constructor
  · intro hD Y _ e he
    obtain ⟨r, hr⟩ := hD.extension e he (ContinuousMap.id D)
    exact ⟨r, hr⟩
  · intro hD
    obtain ⟨r, hr⟩ := hD (productOfMemOpens D) (proposition_1_5 D).2
    exact proposition_1_4 (isInjectiveSpace_sierpinski_power (Opens D))
      (productOfMemOpens D) r hr
```

1.2.10 Absolute retracts ✓

As a result of these very elementary considerations, the injective spaces could be called *absolute retracts*, if one remembers to modify the standard definitions by using *arbitrary* subspaces rather than just *closed* subspaces. Note too that it is easy to show that the only continuous maps $e : X \to Y$ for which the extension property

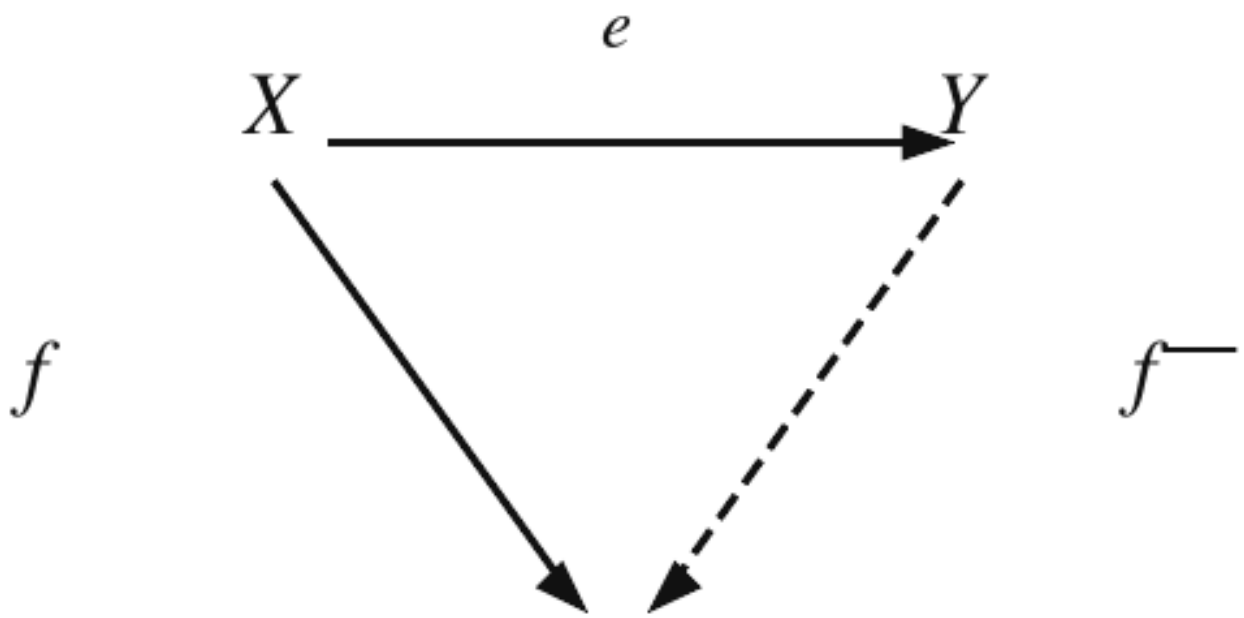

Figure 5: Extension triangle: X to Y by e, f from X to O, dashed f bar from Y to O.

could hold for *all* continuous $f : X \to \mathbb{O}$ are embeddings as subspaces.

Thus it would seem that we have a reasonably good initial grasp of the notion of injective spaces, but further constructions are considerably facilitated by the introduction of the lattice structure.

1.3 Continuous lattices ✓

Scott develops specialization, Scott-open sets, Scott topology, monotone nets, and Proposition 2.1 in Specialization order; the way-below relation, Proposition 2.2, and Definition 2.3 in Way-below relation. Proposition 2.4 through Theorem 2.12, idempotent fixed points, the order-iso and specialization lemmas used in inverse limits, and the post-theorem remarks are in Continuous lattice. Scott maps and Propositions 2.8–2.11, with their proof notes, treat Scott continuity, products, and retractions on continuous lattices on the way to Proposition 2.11 and Theorem 2.12.

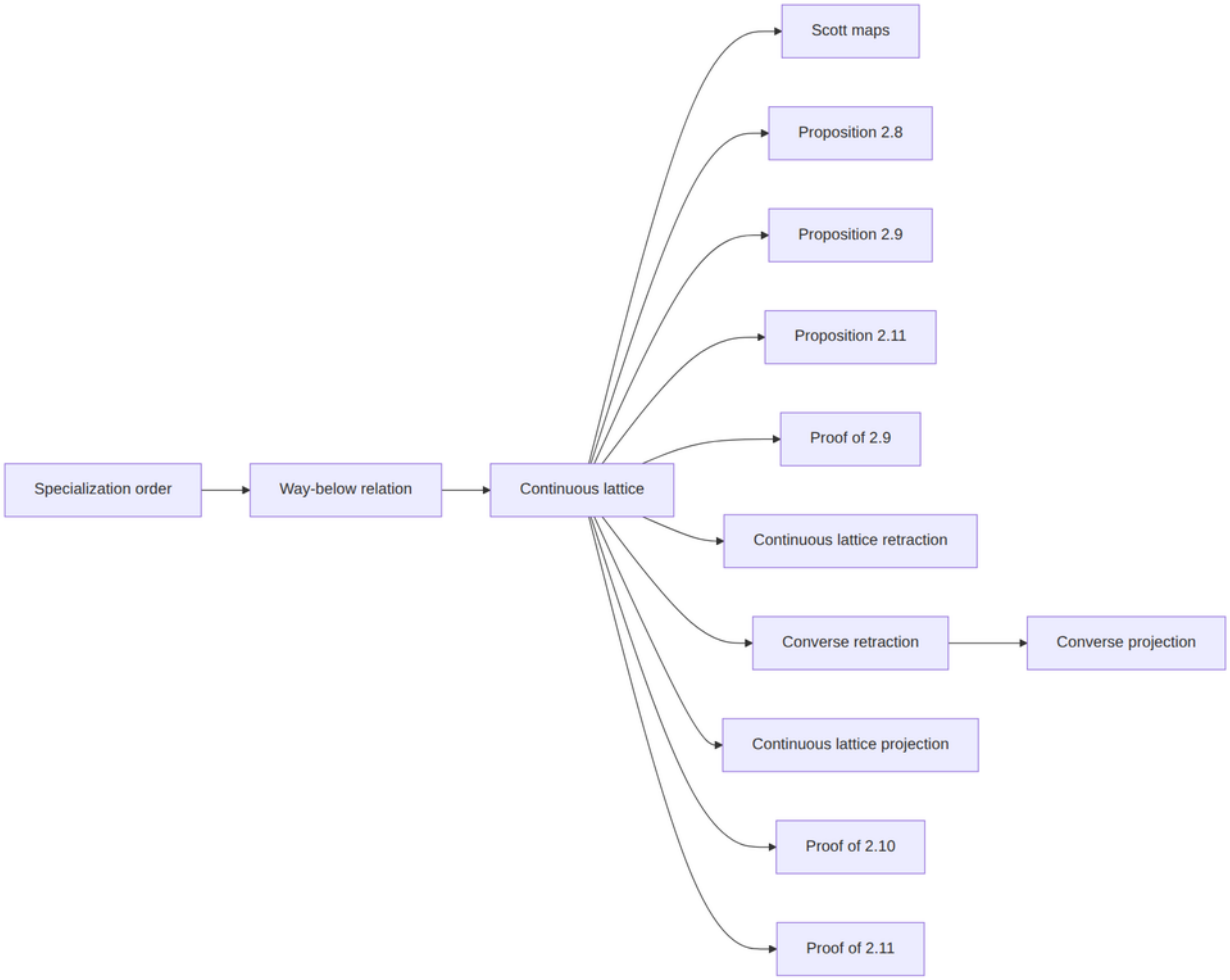

Figure 6: Continuous lattices ✓.

1.3.1 Specialization order ✓

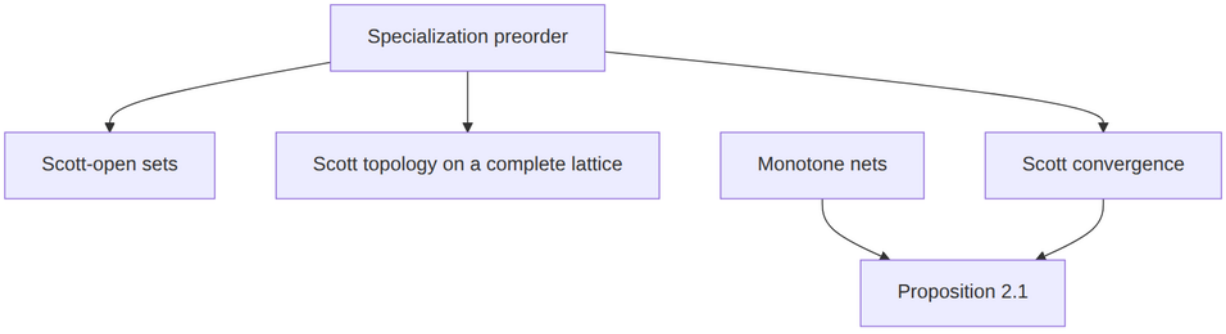

Figure 7: Specialization order ✓.

Specialization preorder Every T_0-space becomes a partially ordered set under the definition:

$$x \sqsubseteq y \text{ iff whenever } x \in U \text{ and } U \text{ is open, then } y \in U.$$

We call relation $\sqsubseteq$ **the specialization preorder** on X. It is reflexive and transitive on every topological space; on a T_0-space it is antisymmetric, and that antisymmetry is exactly the T_0-axiom.

In the converse direction, every partially ordered set $\langle X, \sqsubseteq \rangle$ can be so obtained, for we have only to define $U \subseteq X$ as being open if it satisfies the condition:

(i) whenever $x \in U$ and $x \sqsubseteq y$, then $y \in U$.

The axioms for partial order make X a T_0-space, because for any $y \in X$ the set

$$\{x \in X : x \not\sqsubseteq y\}$$

is open. This connection is not very interesting, however.

The formalization names the same predicate `SpecializationPreorder`. The lemmas below are the library tools used in the inverse-limit specialization characterization and in Theorem 2.12.

Notation. For the specialization preorder above, Mathlib also writes $y \rightsquigarrow x$ when y lies in every open neighborhood of x (the relation `Specializes`, read "y specializes x"). The arrow points from the larger point toward the smaller one; Scott's $x \sqsubseteq y$ is the same comparison with the opposite order of arguments.

Lemma (`SpecializationPreorder.iff_specializes`). For x, y in a topological space, $x \sqsubseteq y$ iff $y \rightsquigarrow x$.

Proof. Both sides mean: whenever U is open and $x \in U$, then $y \in U$. This is `specializes_iff_forall_open`. □

Lemma (`SpecializationPreorder.scott_iff`). On a complete lattice D with the Scott topology `scottTopologicalSpace`, for all $x, y \in D$,

$$x \sqsubseteq y \text{ (specialization preorder)} \iff x \leq y \text{ (lattice order)}.$$

Proof. ($\Rightarrow$) Suppose $x \sqsubseteq y$ but $x \not\leq y$. The set $U = \{z \in D : z \not\leq y\}$ is Scott-open (`ScottOpen.not_le`). We have $x \in U$ since $x \not\leq y$, so $y \in U$ by the specialization preorder; that is $y \not\leq y$, a contradiction. Hence $x \leq y$.

($\Leftarrow$) Suppose $x \leq y$ and U is Scott-open with $x \in U$. Since U is an upset, $y \in U$. Thus $x \sqsubseteq y$. □

Lemma (`SpecializationPreorder.map`). If $x \sqsubseteq y$ in X and $f : X \to Y$ is continuous, then $f(x) \sqsubseteq f(y)$ in Y.

Proof. Let $V \subseteq Y$ be open with $f(x) \in V$. Then $x \in f^{-1}(V)$ and $f^{-1}(V)$ is open in X. From $x \sqsubseteq y$ we get $y \in f^{-1}(V)$, hence $f(y) \in V$. □

`SpecializationPreorder.lean`

```
module

public import DomainTheory.ContinuousLattice.Specialization.scottTopologicalSpace
import DomainTheory.ContinuousLattice.WayBelow.ScottOpen

@[expose] public section

namespace DomainTheory.ContinuousLattice
```

```
open Topology Set

universe u

variable {X : Type*} {D : Type u} [TopologicalSpace X] [CompleteLattice D]

def SpecializationPreorder (x y : X) : Prop :=
  ∀ U, IsOpen U → x ∈ U → y ∈ U

namespace SpecializationPreorder

theorem iff_specializes {x y : X} :
    SpecializationPreorder x y ↔ y  ~>  x :=
  specializes_iff_forall_open.symm

variable {ι : Type u} [Preorder ι] [IsDirected ι (· ≤ ·)]

variable {x : ι → D} {L y : D}

theorem scott_iff {x y : D} :
    @SpecializationPreorder D scottTopologicalSpace x y ↔ x ≤ y := by
  constructor
  · intro hxy
    by_contra h
    exact hxy {z | ¬ z ≤ y} (ScottOpen.isOpen_iff.mpr (ScottOpen.not_le y)) h (by simp
    )
  · intro hxy U hU hxU
    exact (ScottOpen.isOpen_iff.mp hU).1 hxy hxU

theorem map {Y : Type*} [TopologicalSpace Y] {x y : X}
    (hxy : SpecializationPreorder x y) {f : X → Y} (hf : Continuous f) :
    SpecializationPreorder (f x) (f y) := by
  intro U hU hxU
  exact hxy (f ^-1' U) (hU.preimage hf) hxU

end SpecializationPreorder

end DomainTheory.ContinuousLattice
```

Scott-open sets We shall find that most of the facts about the topology of the spaces we are concerned with here can be expressed in terms of least upper bounds (lubs). It is not always the case, however, that lubs are limits. Thus, for a partially ordered set X, we impose a further restriction on its topology beyond condition (i) for saying when a subset U is open:

(ii) whenever $S \subseteq X$ is *directed*, $\bigsqcup S$ exists, and $\bigsqcup S \in U$, then $S \cap U \neq \emptyset$.

By a directed subset of X we of course mean that it is directed in the sense of the partial ordering $\sqsubseteq$. Note that in this paper directed sets are always *non-empty*.

Scott-open sets are exactly the open sets of `scottTopologicalSpace`.

On a complete lattice D we use the lattice order $\leq$ (for the specialization order on D with the Scott topology, this agrees with $\sqsubseteq$; see `SpecializationPreorder.scott_iff`). Condition (i) is that U

be an *upper set* (an upset): if $a \in U$ and $a \le b$, then $b \in U$. The formalization packages (i) and (ii) for subsets of D as `ScottOpen`. The lemmas below are the library tools that justify that equivalence.

Definition (`ScottOpen`). A subset $U \subseteq D$ is **Scott-open** when U is an upper set and, for every nonempty directed $S \subseteq D$, if $\sup S \in U$ then $S \cap U \neq \emptyset$.

Lemma (`ScottOpen.isUpperSet`). If U is Scott-open, then U is an upper set.

Proof. This is the first component of the definition. □

Lemma (`ScottOpen.inter`). If U and V are Scott-open, then $U \cap V$ is Scott-open.

Proof. $U \cap V$ is an upper set. If $\sup S \in U \cap V$ for directed nonempty S, then $\sup S \in U$ and $\sup S \in V$. By Scott-openness of U and V there are $s_1, s_2 \in S$ with $s_1 \in U$ and $s_2 \in V$. Directedness gives $s_3 \in S$ with $s_3 \ge s_1, s_2$, hence $s_3 \in U \cap V$. □

Lemma (`ScottOpen.univ`). The whole lattice D is Scott-open.

Proof. D is an upper set. If $\sup S \in D$ for nonempty S, any $s \in S$ lies in D. □

Lemma (`ScottOpen.sUnion`). If every member of a family $\mathcal{C}$ of subsets of D is Scott-open, then $\bigcup \mathcal{C}$ is Scott-open.

Proof. A union of upper sets is an upper set. If $\sup S$ lies in some $U \in \mathcal{C}$ with U Scott-open, pick $s \in S \cap U$; then $s \in \bigcup \mathcal{C}$. □

Lemma (`ScottOpen.iff_dirSupInacc`). For $U \subseteq D$,

$$U \text{ is Scott-open} \iff U \text{ is an upper set and } U \text{ is inaccessible under directed sups}$$

(in Mathlib: `IsUpperSet U ∧ DirSupInacc U`).

Proof. Both sides unfold to the same upset condition and the same "if $\sup S \in U$ for directed nonempty S, then $S \cap U \neq \emptyset$" clause, phrased either with `sSup` or with `IsLUB`. □

Lemma (`ScottOpen.preimage_orderIso`). If $e : A \to B$ is an order isomorphism and $U \subseteq B$ is Scott-open, then $e^{-1}(U) \subseteq A$ is Scott-open.

Proof. Upper-set condition pulls back along monotone e. If $\sup S \in e^{-1}(U)$ for directed nonempty $S \subseteq A$, then $\sup(e'' S) = e(\sup S) \in U$; Scott-openness of U gives $s \in S$ with $e(s) \in U$, i.e. $s \in e^{-1}(U)$. □

Lemma (`ScottOpen.isOpen_iff`). With the Scott topology `scottTopologicalSpace` on D, a set $U \subseteq D$ is topologically open iff U is Scott-open.

Proof. Rewrite via `ScottOpen.iff_dirSupInacc` and the definition of `scottTopologicalSpace` as `Topology.scott D Set.univ`; conclude with Mathlib's `IsScott.isOpen_iff_isUpperSet_and_dirSupInaccOn`. □

Lemma (`ScottOpen.not_le`). For any $L \in D$, the set $U = \{z \in D : z \not\le L\}$ is Scott-open.

Proof. If $a \in U$ and $a \le b$, then $b \not\le L$ (otherwise $a \le b \le L$). If $\sup S \in U$ for directed nonempty S but $S \cap U = \emptyset$, then every $s \in S$ satisfies $s \le L$, so $\sup S \le L$, contradicting $\sup S \in U$. □

Lemma (`ScottOpen.wayBelow`). For $x \in D$, the set

$$\{z \in D : \exists U \subseteq D,\ U \text{ Scott-open} \wedge z \in U \wedge U \subseteq \{w : x \le w\}\}$$

is Scott-open. Once the way-below relation $x \ll y$ is defined (`WayBelow`), this set is $\{z : x \ll z\}$; see `WayBelow.lean`.

Proof. If a belongs to a Scott-open U with $U \subseteq \{w : x \le w\}$ and $a \le b$, then $b \in U$ by the upset property, so b is in the same set. If $\sup S$ belongs to the set, pick a witness Scott-open U with $\sup S \in U \subseteq \{w : x \le w\}$. By Scott-openness of U, some $s \in S$ lies in U, and the same U witnesses s in $\{z : x \ll z\}$ in the existential form. □

ScottOpen.lean

```
module

public import DomainTheory.ContinuousLattice.Specialization.scottTopologicalSpace

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

universe u

variable {X : Type*} {D : Type u} [TopologicalSpace X] [CompleteLattice D]

def ScottOpen (U : Set D) : Prop :=
  open CompleteLattice in
  letI : LE D := (toCompleteSemilatticeInf (α := D)).toPartialOrder.toPreorder.toLE
  letI : SupSet D := (toCompleteSemilatticeSup (α := D)).toSupSet
  IsUpperSet U ∧
    ∀ {{S : Set D}}, S.Nonempty → DirectedOn (· ≤ ·) S → sSup S ∈ U → (S ∩ U).
    Nonempty

namespace ScottOpen

theorem isUpperSet {U : Set D} (h : ScottOpen U) : IsUpperSet U := h.1

theorem inter {U V : Set D} (hU : ScottOpen U) (hV : ScottOpen V) : ScottOpen (U ∩ V)
    := by
  refine ⟨hU.1.inter hV.1, fun S hS hSdir hmem => ?_⟩
  obtain ⟨s₁, hs₁S, hs₁U⟩ := hU.2 hS hSdir hmem.1
  obtain ⟨s₂, hs₂S, hs₂V⟩ := hV.2 hS hSdir hmem.2
  obtain ⟨s₃, hs₃S, h₁, h₂⟩ := hSdir s₁ hs₁S s₂ hs₂S
  exact ⟨s₃, hs₃S, hU.1 h₁ hs₁U, hV.1 h₂ hs₂V⟩

theorem univ : ScottOpen (Set.univ : Set D) := by
  refine ⟨isUpperSet_univ, fun S hS _ _ => ?_⟩
  obtain ⟨s, hs⟩ := hS
  exact ⟨s, hs, Set.mem_univ s⟩

theorem sUnion {C : Set (Set D)} (hC : ∀ U ∈ C, ScottOpen U) : ScottOpen (⋃₀ C) := by
  refine ⟨isUpperSet_sUnion fun U hU => (hC U hU).1, fun S hS hSdir hmem => ?_⟩
  obtain ⟨U, hUC, hUmem⟩ := hmem
  obtain ⟨s, hsS, hsU⟩ := (hC U hUC).2 hS hSdir hUmem
  exact ⟨s, hsS, U, hUC, hsU⟩

theorem iff_dirSupInacc {U : Set D} : ScottOpen U ↔ IsUpperSet U ∧ DirSupInacc U := by
  constructor
  · intro ⟨hU, hU'⟩
    refine ⟨hU, fun d hd₁ hd₂ a ha hmem => ?_⟩
    rw [← IsLUB.sSup_eq ha] at hmem
    obtain ⟨s, hs, hsU⟩ := hU' hd₁ hd₂ hmem
    exact ⟨s, hs, hsU⟩
  · intro ⟨hU, hU'⟩
    refine ⟨hU, fun d hd₁ hd₂ hmem => ?_⟩
```

```
    obtain ⟨s, hs, hsU⟩ := hU' hd₁ hd₂ (isLUB_sSup d) hmem
    exact ⟨s, hs, hsU⟩

theorem isOpen_iff {U : Set D} : @IsOpen D scottTopologicalSpace U ↔ ScottOpen U := by
  rw [iff_dirSupInacc, scottTopologicalSpace]
  have hinst : @IsScott D (@Set.univ (Set D)) _ (Topology.scott D (@Set.univ (Set D)))
    :=
    @IsScott.mk D (@Set.univ (Set D)) _ (Topology.scott D (@Set.univ (Set D))) rfl
  simpa [dirSupInaccOn_univ] using
    @IsScott.isOpen_iff_isUpperSet_and_dirSupInaccOn D (@Set.univ (Set D)) _
      (Topology.scott D (@Set.univ (Set D))) U hinst

variable {ι : Type u} [Preorder ι] [IsDirected ι (· ≤ ·)]

variable {x : ι → D} {L y : D}

theorem not_le (L : D) : ScottOpen {z : D | ¬ z ≤ L} := by
  refine ⟨fun a b hab ha hb => ha (le_trans hab hb), fun S hSne hSdir hmem => ?_⟩
  by_contra hcon
  refine hmem (sSup_le fun s hs => ?_)
  by_contra hsL
  exact hcon ⟨s, hs, hsL⟩

theorem wayBelow (x : D) :
    ScottOpen {z : D | ∃ U : Set D, ScottOpen U ∧ z ∈ U ∧ U ⊆ Set.Ici x} := by
  refine ⟨fun a b hab ha => ?_, fun S hS hSdir hmem => ?_⟩
  obtain ⟨U, hU, haU, hsub⟩ := ha
  exact ⟨U, hU, hU.1 hab haU, hsub⟩
  obtain ⟨U, hU, hsupU, hsub⟩ := hmem
  obtain ⟨s, hsS, hsU⟩ := hU.2 hS hSdir hsupU
  exact ⟨s, hsS, ⟨U, hU, hsU, hsub⟩⟩

variable {A B : Type u} [CompleteLattice A] [CompleteLattice B]

theorem preimage_orderIso (e : A ≃o B) {U : Set B} (hU : ScottOpen U) :
    ScottOpen (e ^-1' U) := by
  refine ⟨fun x y hxy hx => hU.1 (e.monotone hxy) hx, ?_⟩
  intro S hSne hSdir hsup
  have hImgNe : (e '' S).Nonempty := hSne.image e
  have hImgDir : DirectedOn (· ≤ ·) (e '' S) := by
    rintro _ ⟨x, hx, rfl⟩ _ ⟨y, hy, rfl⟩
    obtain ⟨z, hz, hxz, hyz⟩ := hSdir x hx y hy
    exact ⟨e z, Set.mem_image_of_mem e hz, e.monotone hxz, e.monotone hyz⟩
  have hmap : e (sSup S) = sSup (e '' S) := by
    rw [e.map_sSup, sSup_image]
  obtain ⟨_, ⟨s, hs, rfl⟩, hes⟩ := hU.2 hImgNe hImgDir (hmap ▸ hsup)
  exact ⟨s, hs, hes⟩

end ScottOpen

end DomainTheory.ContinuousLattice
```

Scott topology on a complete lattice The sets satisfying (i) and (ii) form the *induced topology* on a partially ordered set X, which is still a T_0-space because the sets $\{x \in X : x \not\sqsubseteq y\}$ remain open even in the

sense of (ii). Obviously a directed set $S \subseteq X$ can be regarded as a net, and now in view of (ii) it follows that S converges to $\bigsqcup S$ — if this lub exists.

On a complete lattice D, the formalization names this induced topology **`scottTopologicalSpace`**: a concrete `TopologicalSpace D` built from Mathlib's Scott construction, **not** a global typeclass default (so we can still name Scott explicitly in later theorems and compare other topologies on the same D).

Lemma (`scottTopologicalSpace.t0Space`). D is a T_0-space for the topology `scottTopologicalSpace`.

Proof. After `let : TopologicalSpace D := scottTopologicalSpace`, implicit `[TopologicalSpace D]` in the Scott library matches the topology in the goal `@T0Space D scottTopologicalSpace`; then `IsScott` holds by definition and Mathlib supplies `T0Space`. (That `let` line does not pass arguments into the def—it registers the def as the local topology instance for the proof block.) □

`scottTopologicalSpace.lean`

```
module

public import Mathlib.Topology.Order.ScottTopology

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

universe u

variable {X : Type*} {D : Type u} [TopologicalSpace X] [CompleteLattice D]

@[reducible] noncomputable def scottTopologicalSpace : TopologicalSpace D :=
  Topology.scott D (@Set.univ (Set D))

namespace scottTopologicalSpace

theorem t0Space : @T0Space D scottTopologicalSpace := by
  let : TopologicalSpace D := scottTopologicalSpace
  have : IsScott D (@Set.univ (Set D)) := ⟨rfl⟩
  exact inferInstanceAs (T0Space D)

end scottTopologicalSpace

end DomainTheory.ContinuousLattice
```

Monotone nets What *is* interesting in topological spaces is *convergence* and the properties of *limit points*. We shall discuss limits in terms of *nets*, in particular in terms of *monotone nets*. A monotone net in a T_0-space X is a function

$$x : I \to X$$

where $\langle I, \leq \rangle$ is a directed set and where $i \leq j$ implies $x_i \sqsubseteq x_j$ for all $i, j \in I$. In a T_1-space a monotone net is constant (hence, uninteresting) because the $\sqsubseteq$-relation is the identity.

On a complete lattice D, the library records the same idea as **`MonotoneNet`**: for a directed index type ι and a net $x : \iota \to D$, require **`Monotone x`** (i.e. $i \le j \Rightarrow x_i \le x_j$ in the lattice order). With the Scott topology, $\sqsubseteq$ agrees with $\le$ (`SpecializationPreorder.scott_iff`); **Proposition 2.1** is stated using `MonotoneNet` and `ScottConvergesTo`.

`MonotoneNet.lean`

```
module

public import Mathlib.Order.CompleteLattice.Basic
import Mathlib.Order.Directed
import Mathlib.Order.Monotone.Basic

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

variable {D : Type u} [CompleteLattice D]

variable {ι : Type u} [Preorder ι] [IsDirected ι (· ≤ ·)]

class MonotoneNet (x : ι → D) : Prop where
  out : Monotone x

end DomainTheory.ContinuousLattice
```

Scott convergence As usual (cf. Kelley (1955), p.66) we say that a net x *converges* to an element y iff whenever U is open and $y \in U$, then for some $i \in I$ we have $x_j \in U$ for all $j \ge i$. Note that a monotone net x converges to each of its terms x_i. Suppose that a monotone net x converges to an element y which is an upper bound to all the terms of x. Then y must be the *least upper bound*, which we write as:

$$y = \bigsqcup \{x_i : i \in I\}.$$

To see this, assume that z is any other upper bound with $x_i \sqsubseteq z$ for all $i \in I$. If U is open and $y \in U$, then $x_i \in U$ for some $i \in I$. But then $z \in U$, and so $y \sqsubseteq z$ follows.

On a complete lattice D with directed index type ι, the library names Scott's convergence condition **`ScottConvergesTo`**: for a net $x : \iota \to D$ and a point $y \in D$,

$$\text{`ScottConvergesTo x y`} \iff \forall U,\ U \text{ Scott-open} \wedge y \in U \Rightarrow \text{eventually } x_j \in U.$$

"Open" in the induced Scott sense is **`ScottOpen U`**; the same sets are open for the topology **`scottTopologicalSpace`** (`ScottOpen.isOpen_iff`). The specialization preorder in that topology agrees with lattice $\le$ (`SpecializationPreorder.scott_iff`). Scott's paragraph above is the motivation for the biconditional in **Proposition 2.1**, which is proved in `proposition_2_1.lean` and stated on the separate Proposition 2.1 note (together with **`MonotoneNet`**).

`ScottConvergesTo.lean`

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ScottOpen

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

variable {D : Type u} [CompleteLattice D]

variable {ι : Type u} [Preorder ι] [IsDirected ι (· ≤ ·)]

def ScottConvergesTo (x : ι → D) (y : D) : Prop :=
  ∀ U, ScottOpen U → y ∈ U → ∃ i, ∀ j ≥ i, x j ∈ U

end DomainTheory.ContinuousLattice
```

Proposition 2.1 We can summarize this discussion as follows.

2.1 Proposition. *In a partially ordered set X with the induced topology, a monotone net $x : I \to X$ with a least upper bound converges to an element $y \in X$ iff*

$$y \sqsubseteq \bigsqcup \{x_i : i \in I\}.$$

□

On a complete lattice D with directed index type ι, Scott's "induced topology" is the Scott topology **`scottTopologicalSpace`**: convergence is **`ScottConvergesTo`**, monotonicity is **`MonotoneNet x`**, and a least upper bound L of the net is **`IsLUB (range x) L`**. Under that topology, $\sqsubseteq$ is lattice $\leq$ (`SpecializationPreorder.scott_iff`), so Scott's condition is formalized as `ScottConvergesTo x y ↔ y ≤ L`. The module **`proposition_2_1`** is Scott's biconditional; the nested lemmas in namespace **`proposition_2_1`** are the two directions.

Lemma (`proposition_2_1.le_of_converges`). If `IsLUB (range x) L` and `ScottConvergesTo x y`, then $y \leq L$.

Proof. If $y \not\leq L$, then $y \in \{z : z \not\leq L\}$, which is Scott-open (`ScottOpen.not_le L`). Convergence gives a tail of the net in that set, contradicting that L bounds every term. □

Lemma (`proposition_2_1.of_le`). If ι is nonempty, `MonotoneNet x`, `IsLUB (range x) L`, and $y \leq L$, then `ScottConvergesTo x y`.

Proof. For Scott-open U with $y \in U$, the values $\{x_i\}$ form a directed set in the lattice order; $L = \bigsqcup x_i \in U$ since U is an upset, so Scott-openness yields some term in U, and monotonicity keeps all later terms in U. □

Theorem (`proposition_2_1`). If ι is nonempty, `MonotoneNet x`, and `IsLUB (range x) L`, then `ScottConvergesTo x y ↔ y ≤ L`.

Proof. `proposition_2_1.le_of_converges` and `proposition_2_1.of_le`. □

`proposition_2_1.lean`

```
module

public import DomainTheory.ContinuousLattice.Specialization.MonotoneNet
```

```
public import DomainTheory.ContinuousLattice.Specialization.ScottConvergesTo

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

variable {D : Type u} [CompleteLattice D]

variable {ι : Type u} [Preorder ι] [IsDirected ι (· ≤ ·)]

variable {x : ι → D} {L y : D}

namespace proposition_2_1

omit [IsDirected ι (· ≤ ·)] in
theorem le_of_converges (hL : IsLUB (range x) L) (hconv : ScottConvergesTo x y) : y ≤
    L := by
  by_contra hyL
  obtain ⟨i, hi⟩ := hconv {z : D | ¬ z ≤ L} (ScottOpen.not_le L) hyL
  exact hi i le_rfl (hL.1 ⟨i, rfl⟩)

theorem of_le [Nonempty ι] (hx : MonotoneNet x) (hL : IsLUB (range x) L) (hyL : y ≤ L)
    :
    ScottConvergesTo x y := by
  intro U hU hyU
  have hdir : DirectedOn (· ≤ ·) (range x) := by
    rintro _ ⟨i, rfl⟩ _ ⟨j, rfl⟩
    obtain ⟨k, hik, hjk⟩ := IsDirected.directed (r := (· ≤ ·)) i j
    exact ⟨x k, ⟨k, rfl⟩, hx.out hik, hx.out hjk⟩
  have hLU : sSup (range x) ∈ U := by
    rw [IsLUB.sSup_eq hL]
    exact hU.1 hyL hyU
  obtain ⟨s, hsS, hsU⟩ := hU.2 (Set.range_nonempty x) hdir hLU
  obtain ⟨i₀, rfl⟩ := hsS
  refine ⟨i₀, fun j hj => hU.1 (hx.out hj) hsU⟩

end proposition_2_1

theorem proposition_2_1 [Nonempty ι] (hx : MonotoneNet x) (hL : IsLUB (range x) L) :
    ScottConvergesTo x y ↔ y ≤ L :=
  ⟨fun hconv => proposition_2_1.le_of_converges hL hconv, proposition_2_1.of_le hx hL⟩

end DomainTheory.ContinuousLattice
```

1.3.2 Way-below relation ✓

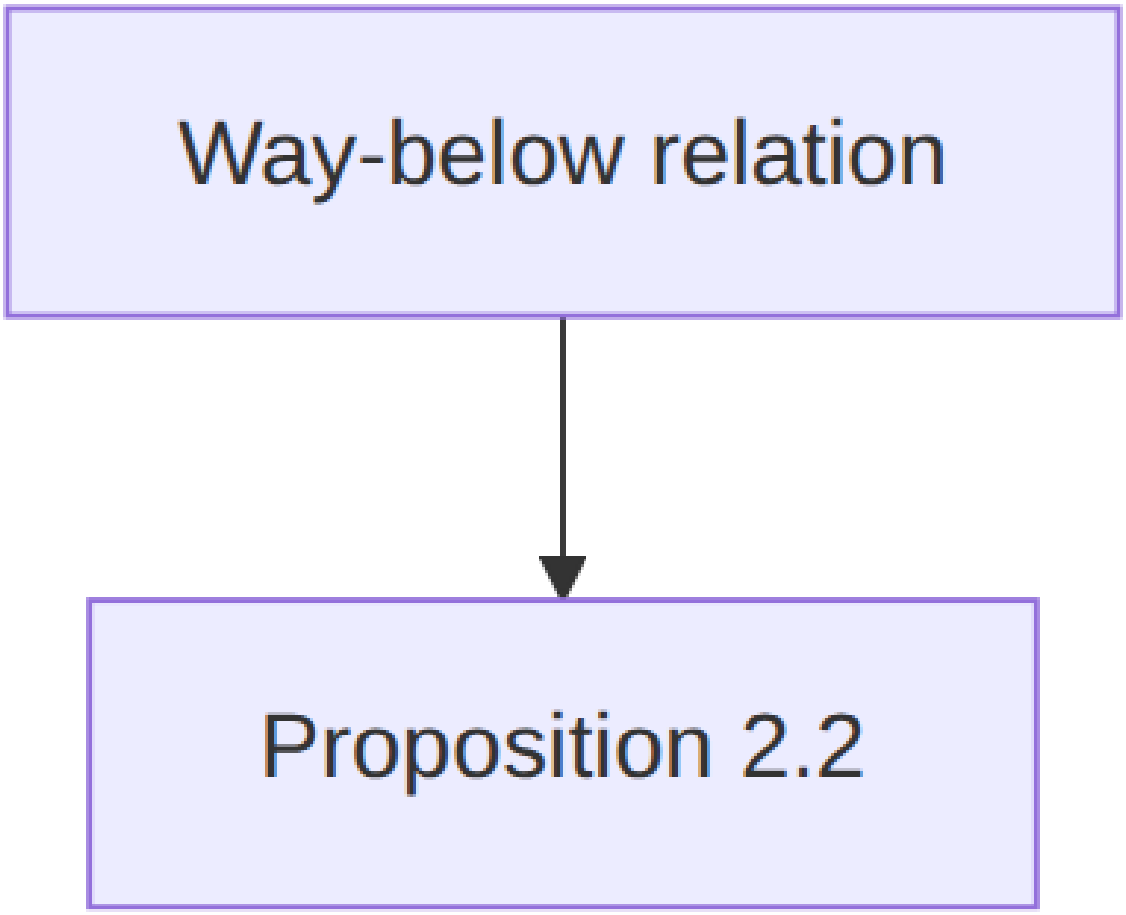

Figure 8: Way-below relation ✓.

Way-below relation Our main interest will lie with those partially ordered sets in which every subset has a lub: namely, *complete lattices*. If D is such a space we write $\bot = \bigsqcup \emptyset$ and $\top = \bigsqcup D$ for the smallest and largest elements (read: bottom and top). As is well known, greatest lower bounds must exist, for:

$$\sqcap S = \bigsqcup \{x \in D : x \sqsubseteq y\} \text{ for all } y \in S$$

gives the definition.

Given a complete lattice D we define

$$x \ll y \text{ iff } y \in \text{Int}\{z \in D : x \sqsubseteq z\},$$

where the interior is taken in the sense of the induced topology. The relation $x \ll y$ behaves somewhat like a strict ordering relation; at least its meaning is clearly that y should be definitely larger than x in the

partial ordering. Such a relation has many pleasant properties.

On a complete lattice D, the induced topology is the Scott topology **`scottTopologicalSpace`**; $\sqsubseteq$ is lattice $\leq$ (`SpecializationPreorder.scott_iff`). Scott's interior condition is equivalent to: there is a Scott-open set U with $y \in U$ and $U \subseteq \{z : x \leq z\}$ (i.e. $U \subseteq\!\uparrow x$). The library names that relation **`WayBelow`**; we write **`x`** $\ll$ **`y`** for `WayBelow x y`. The set $\{z : x \ll z\}$ is Scott-open (`ScottOpen.wayBelow`).

The elementary lemmas live in namespace **`WayBelow`** (same pattern as **`ScottOpen`**). **Proposition 2.2** is Scott's list (i)–(vii), proved in `proposition_2_2.lean` by calling these tools; see the Proposition 2.2 note.

Definition (`WayBelow`). $x \ll y$ iff $\exists U$, U Scott-open $\wedge y \in U \wedge U \subseteq \{z : x \leq z\}$.

Lemma (`WayBelow.bot`). $\bot \ll x$ for all $x \in D$.

Proof. Take $U = D$ (`ScottOpen.univ`). □

Lemma (`WayBelow.sup`). If $x \ll z$ and $y \ll z$, then $x \sqcup y \ll z$.

Proof. Intersect the two witnessing Scott-open sets (`ScottOpen.inter`). □

Lemma (`WayBelow.trans_le`). If $x \ll y$ and $y \leq z$, then $x \ll z$.

Proof. The same Scott-open witness works; $z \in U$ because U is an upset. □

Lemma (`WayBelow.le_trans`). If $x \leq y$ and $y \ll z$, then $x \ll z$.

Proof. Every $w \in U$ with $y \ll z$ satisfies $x \leq w$. □

Lemma (`WayBelow.le`). If $x \ll y$, then $x \leq y$.

Proof. $y \in U \subseteq\!\uparrow x$. □

Lemma (`WayBelow.self_iff_scottOpen_Ici`). $x \ll x$ iff $\uparrow x = \{z : x \leq z\}$ is Scott-open.

Proof. ($\Rightarrow$) A witness U for $x \ll x$ must equal $\uparrow x$. ($\Leftarrow$) Take $U = \uparrow x$. □

Lemma (`WayBelow.sSup_iff`). For nonempty directed $S \subseteq D$,

$$x \ll \sup S \iff \exists y \in S,\ x \ll y.$$

Proof. ($\Rightarrow$) Use the Scott-open witness and directed-sup accessibility in the definition of Scott-open. ($\Leftarrow$) If $x \ll y$ with $y \in S$, the witness for $x \ll y$ also works for $x \ll \sup S$. □

Lemma (`WayBelow.directedOn`). For each $y \in D$, the set $\{x : x \ll y\}$ is directed in the lattice order.

Proof. If $a, b \ll y$, then $a \sqcup b \ll y$ by `WayBelow.sup`. □

Lemma (`WayBelow.sInf`). If U is Scott-open and $y \in U$, then $\inf U \ll y$.

Proof. U itself witnesses $\inf U \ll y$: every $w \in U$ satisfies $\inf U \leq w$. □

Lemma (`WayBelow.map_orderIso`). If $e : A \to B$ is an order isomorphism and $x \ll y$ in A, then $e(x) \ll e(y)$ in B.

Proof. Pull back the Scott-open witness for $x \ll y$ along e^{-1} (`ScottOpen.preimage_orderIso`); membership and the $\uparrow$-subgraph condition follow from e and e^{-1} being order isomorphisms. □

`WayBelow.lean`

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ScottOpen

@[expose] public section

namespace DomainTheory.ContinuousLattice
```

```
universe u

variable {D : Type u} [CompleteLattice D]

def WayBelow (x y : D) : Prop :=
  letI : LE D :=
    (CompleteLattice.toCompleteSemilatticeInf (α := D)).toPartialOrder.toPreorder.toLE
  letI : Preorder D :=
    (CompleteLattice.toCompleteSemilatticeInf (α := D)).toPartialOrder.toPreorder
  ∃ U : Set D, ScottOpen U ∧ y ∈ U ∧ U ⊆ Set.Ici x

@[inherit_doc] scoped infix:50 " ≪ " => WayBelow

namespace WayBelow

theorem bot (x : D) : (⊥ : D) ≪ x :=
  ⟨Set.univ, ScottOpen.univ, Set.mem_univ x, fun _ _ => bot_le⟩

theorem sup {x y z : D} (hx : x ≪ z) (hy : y ≪ z) : x ⊔ y ≪ z := by
  obtain ⟨U, hU, hzU, hUsub⟩ := hx
  obtain ⟨V, hV, hzV, hVsub⟩ := hy
  refine ⟨U ∩ V, hU.inter hV, ⟨hzU, hzV⟩, fun w hw => ?_⟩
  exact Set.mem_Ici.2 (sup_le (hUsub hw.1) (hVsub hw.2))

theorem trans_le {x y z : D} (h : x ≪ y) (hyz : y ≤ z) : x ≪ z := by
  obtain ⟨U, hU, hyU, hsub⟩ := h
  exact ⟨U, hU, hU.1 hyz hyU, hsub⟩

theorem le_trans {x y z : D} (hxy : x ≤ y) (h : y ≪ z) : x ≪ z := by
  obtain ⟨U, hU, hzU, hsub⟩ := h
  refine ⟨U, hU, hzU, fun w hw => ?_⟩
  have hyw : y ≤ w := Set.mem_Ici.1 (hsub hw)
  exact Set.mem_Ici.2 (hxy.trans hyw)

theorem le {x y : D} (h : x ≪ y) : x ≤ y := by
  obtain ⟨U, _, hyU, hsub⟩ := h
  exact hsub hyU

theorem self_iff_scottOpen_Ici {x : D} : x ≪ x ↔ ScottOpen (Set.Ici x) := by
  constructor
  · rintro ⟨U, hU, hxU, hsub⟩

    have hIci : Set.Ici x = U :=
      le_antisymm (fun w hw => hU.1 (Set.mem_Ici.1 hw) hxU) hsub
    rw [hIci]; exact hU
  · intro hopen
    exact ⟨Set.Ici x, hopen, Set.self_mem_Ici, le_refl _⟩

theorem sSup_iff {x : D} {S : Set D} (hS : S.Nonempty)
    (hSdir : DirectedOn (· ≤ ·) S) : x ≪ sSup S ↔ ∃ y ∈ S, x ≪ y := by
  constructor
  · rintro ⟨U, hU, hsupU, hsub⟩
    obtain ⟨s, hsS, hsU⟩ := hU.2 hS hSdir hsupU
    exact ⟨s, hsS, U, hU, hsU, hsub⟩
  · rintro ⟨y, hyS, hxy⟩
```

```
    obtain ⟨U, hU, hyU, hsub⟩ := hxy
    exact ⟨U, hU, hU.1 (le_sSup hyS) hyU, hsub⟩

theorem directedOn (y : D) : DirectedOn (· ≤ ·) {x | x ≪ y} :=
  fun a ha b hb => ⟨a ⊔ b, ha.sup hb, le_sup_left, le_sup_right⟩

theorem sInf {U : Set D} (hU : ScottOpen U) {y : D} (hy : y ∈ U) :
    sInf U ≪ y :=
  ⟨U, hU, hy, fun _ hz => Set.mem_Ici.2 (sInf_le hz)⟩

variable {A B : Type u} [CompleteLattice A] [CompleteLattice B]

theorem map_orderIso (e : A ≃o B) {x y : A} (h : x ≪ y) : e x ≪ e y := by
  obtain ⟨U, hU, hyU, hUsub⟩ := h
  refine ⟨e.symm ^-1' U, ScottOpen.preimage_orderIso e.symm hU, ?_, ?_⟩
  · simpa using hyU
  · intro z hz
    have hxz : x ≤ e.symm z := Set.mem_Ici.1 (hUsub hz)
    exact Set.mem_Ici.2 (by simpa using (e.le_iff_le.mpr hxz))

end WayBelow

end DomainTheory.ContinuousLattice
```

Proposition 2.2 **2.2 Proposition.** In a complete lattice D we have:

(i) $\bot \ll x$;

(ii) $x \ll z$ and $y \ll z$ imply $x \sqcup y \ll z$;

(iii) $x \ll y \sqsubseteq z$ implies $x \ll z$;

(iv) $x \sqsubseteq y \ll z$ implies $x \ll z$;

(v) $x \ll y$ implies $x \sqsubseteq y$;

(vi) $x \ll x$ iff $\{z \in D : x \sqsubseteq z\}$ is open;

(vii) if $S \subseteq D$ is directed, then $x \ll \bigsqcup S$ iff $x \ll y$ for some $y \in S$. □

The proofs of these statements can be safely left to the reader.

proposition_2_2.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.WayBelow

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
```

```
variable {D : Type u} [CompleteLattice D]

theorem proposition_2_2 :
    (∀ x : D, (⊥ : D) ≪ x) ∧
    (∀ x y z : D, x ≪ z → y ≪ z → x ⊔ y ≪ z) ∧
    (∀ x y z : D, x ≪ y → y ≤ z → x ≪ z) ∧
    (∀ x y z : D, x ≤ y → y ≪ z → x ≪ z) ∧
    (∀ x y : D, x ≪ y → x ≤ y) ∧
    (∀ x : D, x ≪ x ↔ ScottOpen (Set.Ici x)) ∧
    (∀ (x : D) (S : Set D), S.Nonempty → DirectedOn (· ≤ ·) S →
      (x ≪ sSup S ↔ ∃ y ∈ S, x ≪ y)) :=
  ⟨WayBelow.bot,
    fun _ _ _ hx hy => WayBelow.sup hx hy,
    fun _ _ _ h hyz => WayBelow.trans_le h hyz,
    fun _ _ _ hxy h => WayBelow.le_trans hxy h,
    fun _ _ h => WayBelow.le h,
    fun _ => WayBelow.self_iff_scottOpen_Ici,
    fun _ _ hS hdir => WayBelow.sSup_iff hS hdir⟩

end DomainTheory.ContinuousLattice
```

1.3.3 Continuous lattice ✓

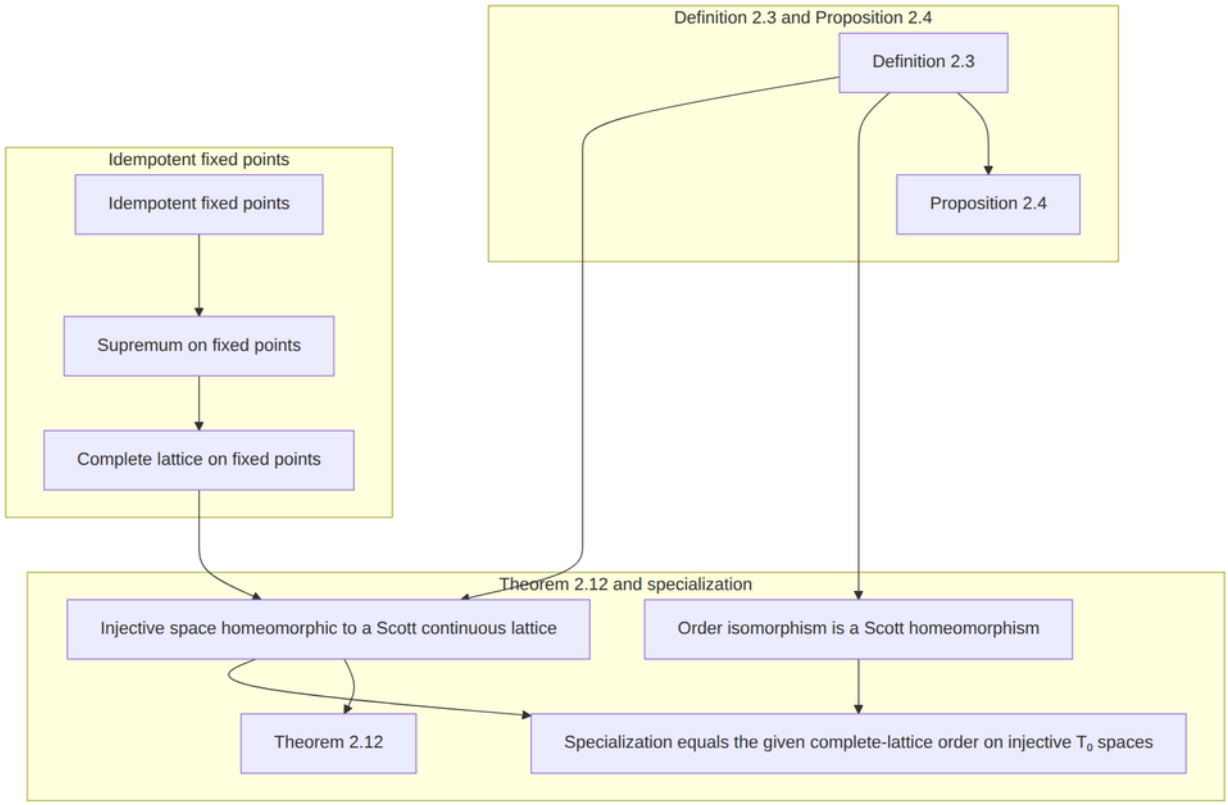

Figure 9: Continuous lattice ✓.

Definition 2.3: Continuous lattice **2.3 Definition.** A *continuous lattice* is a complete lattice D in which for every $y \in D$ we have:

$$y = \bigsqcup \{x \in D : x \ll y\}.$$

On a complete lattice D, the library records this as the typeclass **`ContinuousLattice`**: for every y, the set $\{x : x \ll y\}$ has least upper bound y. Equivalently **`sSup_wayBelow`**: $\sup\{x : x \ll y\} = y$. The way-below relation is **`WayBelow`** / $\ll$; see the Way-below relation note.

Supporting lemmas live in namespace **`ContinuousLattice`** in `ContinuousLattice.lean`. (One interpolation lemma is also exported as **`WayBelow.interpolate`** because it is stated purely in terms of $\ll$, but its proof uses **`ContinuousLattice`**.)

Lemma (`ContinuousLattice.exists_wayBelow_subset`). If D is a continuous lattice, U is Scott-open, and $z \in U$, then there exists $a \ll z$ such that $\{w : a \ll w\} \subseteq U$.

Proof. $\{x : x \ll z\}$ is directed (`WayBelow.directedOn`), has supremum z (`sSup_wayBelow`), and meets U by Scott-openness; any witness a in the intersection works, using that U is an upset. □

Lemma (`ContinuousLattice.exists_wayBelow_Ici_subset`). Under the same hypotheses, there is $a \ll z$ with $\uparrow a \subseteq U$.

Proof. As above, with $\uparrow a$ in place of $\{w : a \ll w\}$. □

Lemma (`ContinuousLattice.orderIso`). If $e : A \to B$ is an order isomorphism and B is a continuous lattice, then so is A (way-below pulls back along e^{-1} via **`WayBelow.map_orderIso`**).

Lemma (`ContinuousLattice.isContinuousLattice_iff_isLUB_sInf_nhds`). D is a continuous lattice iff for every $y \in D$, the set of infima $\inf U$ over Scott-open $U \ni y$ has least upper bound y.

Proof. ($\Rightarrow$) Each $\inf U \ll y$ (`WayBelow.sInf`); the lub of those infs is at most y; **`out`** gives equality. ($\Leftarrow$) Every $x \ll y$ lies in some Scott-open U with $y \in U$, hence $x \leq \inf U$; the lub of the infs bounds all way-below elements below y, so **`out`** holds. □

Lemma (`WayBelow.interpolate`). If D is a continuous lattice and $a \ll c$, then there exists b with $a \ll b \ll c$.

Proof. The set $M = \{m : \exists x,\ m \ll x \ll c\}$ is directed; c is its supremum by **`sSup_wayBelow`**; apply **`WayBelow.sSup_iff`**. □

Proposition 2.4 (equivalent formulations via $\inf U \ll y$ and limits) is Scott's discussion after 2.3; the **`isContinuousLattice_iff_isLUB_sInf_nhds`** lemma is the Scott-open inf characterization used in the library.

`ContinuousLattice.lean`

```
module

public import DomainTheory.ContinuousLattice.WayBelow.WayBelow

@[expose] public section

namespace DomainTheory

open scoped DomainTheory.ContinuousLattice

universe u

variable {D : Type u} [CompleteLattice D]
```

```
class ContinuousLattice (D : Type u) [CompleteLattice D] : Prop where
  out : letI : LE D :=
    (CompleteLattice.toCompleteSemilatticeInf (α := D)).toPartialOrder.toPreorder.toLE
    ∀ y : D, IsLUB {x | x ≪ y} y
  sSup_wayBelow : ∀ y : D, sSup {x | x ≪ y} = y := fun y => (out y).sSup_eq

open ContinuousLattice

namespace ContinuousLattice

theorem exists_wayBelow_subset (hD : ContinuousLattice D) {U : Set D} (hU : ScottOpen
    U)
    {z : D} (hz : z ∈ U) : ∃ a, a ≪ z ∧ {w | a ≪ w} ⊆ U := by
  have hne : {a | a ≪ z}.Nonempty := ⟨⊥, WayBelow.bot z⟩
  have hsup : sSup {a | a ≪ z} ∈ U := by rw [hD.sSup_wayBelow z]; exact hz
  obtain ⟨a, haz, haU⟩ := hU.2 hne (WayBelow.directedOn z) hsup
  exact ⟨a, haz, fun w hw => hU.1 hw.le haU⟩

theorem exists_wayBelow_Ici_subset (hD : ContinuousLattice D) {U : Set D} (hU :
    ScottOpen U)
    {z : D} (hz : z ∈ U) : ∃ a, a ≪ z ∧ Set.Ici a ⊆ U := by
  have hne : {a | a ≪ z}.Nonempty := ⟨⊥, WayBelow.bot z⟩
  have hsup : sSup {a | a ≪ z} ∈ U := by rw [hD.sSup_wayBelow z]; exact hz
  obtain ⟨a, haz, haU⟩ := hU.2 hne (WayBelow.directedOn z) hsup
  exact ⟨a, haz, fun w hw => hU.1 (Set.mem_Ici.1 hw) haU⟩

theorem isContinuousLattice_iff_isLUB_sInf_nhds :
    ContinuousLattice D ↔
      ∀ y : D, IsLUB {a : D | ∃ U, ScottOpen U ∧ y ∈ U ∧ a = sInf U} y := by
  constructor
  · intro h y
    refine ⟨?_, ?_⟩
    · rintro a ⟨U, hU, hyU, rfl⟩
      exact (WayBelow.sInf hU hyU).le
    · intro b hb
      refine (h.out y).2 ?_
      intro x hx
      obtain ⟨U, hU, hyU, hsub⟩ := hx
      have hxle : x ≤ sInf U := le_sInf fun _ hz => Set.mem_Ici.1 (hsub hz)
      exact hxle.trans (hb ⟨U, hU, hyU, rfl⟩)
  · intro h
    refine { out := ?_ }
    intro y
    refine ⟨fun x hx => hx.le, ?_⟩
    intro b hb
    refine (h y).2 ?_
    rintro a ⟨U, hU, hyU, rfl⟩
    exact hb (WayBelow.sInf hU hyU)

theorem orderIso {A B : Type u} [latticeA : CompleteLattice A] [latticeB :
    CompleteLattice B]
    (e : A ≃o B) (hB : ContinuousLattice B) : ContinuousLattice A := by
  refine { out := ?_ }
  intro y
  refine ⟨fun x hx => hx.le, fun b hb => ?_⟩
```

```
  apply e.le_iff_le.mp
  exact (hB.out (e y)).2 fun z hz => by
    have hz' : e.symm z ≪ y := by
      simpa using WayBelow.map_orderIso e.symm hz
    have := hb hz'
    simpa using e.monotone this

namespace WayBelow

theorem interpolate (hD : ContinuousLattice D) {a c : D} (hac : a ≪ c) :
    ∃ b, a ≪ b ∧ b ≪ c := by
  set M : Set D := {m | ∃ x, m ≪ x ∧ x ≪ c} with hM
  have hMdir : DirectedOn (· ≤ ·) M := by
    rintro m₁ ⟨x₁, hm₁x₁, hx₁c⟩ m₂ ⟨x₂, hm₂x₂, hx₂c⟩
    obtain ⟨x₃, hx₃c, hx₁₃, hx₂₃⟩ := WayBelow.directedOn c x₁ hx₁c x₂ hx₂c
    obtain ⟨m₃, hm₃x₃, hm₁m₃, hm₂m₃⟩ :=
      WayBelow.directedOn x₃ m₁ (hm₁x₁.trans_le hx₁₃) m₂ (hm₂x₂.trans_le hx₂₃)
    exact ⟨m₃, ⟨x₃, hm₃x₃, hx₃c⟩, hm₁m₃, hm₂m₃⟩
  have hMne : M.Nonempty := ⟨⊥, a, WayBelow.bot a, hac⟩
  have hsupM : sSup M = c := by
    refine le_antisymm (sSup_le ?_) ?_
    · rintro m ⟨x, hmx, hxc⟩
      exact hmx.le.trans hxc.le
    · rw [← hD.sSup_wayBelow c]
      refine sSup_le fun x hxc => ?_
      rw [← hD.sSup_wayBelow x]
      exact sSup_le fun m hmx => le_sSup ⟨x, hmx, hxc⟩
  rw [← hsupM] at hac
  obtain ⟨m, ⟨x, hmx, hxc⟩, ham⟩ := (WayBelow.sSup_iff hMne hMdir).1 hac
  exact ⟨x, ham.trans_le hmx.le, hxc⟩

end WayBelow

end ContinuousLattice

end DomainTheory
```

Proposition 2.4 **2.4 Proposition.** A complete lattice D is continuous iff for every $y \in D$ we have:

$$y = \bigsqcup\{\sqcap U : y \in U\},$$

where U ranges over the open subsets of D.

Proof: Suppose D is continuous. If $y \in D$ and $x \ll y$, then let $U = \{\mathrm{Int} z : x \sqsubseteq z\}$, an open set. Now $y \in U$ by definition, and $\{U \subseteq z : x \sqsubseteq z\}$. Thus,

$$x \sqsubseteq \sqcap U \sqsubseteq y.$$

It easily follows by lattice theory that the equation of 2.3 implies that of 2.4.

In the converse direction we have only to note that if U is open and $y \in U$, then $\sqcap U \ll y$. The implication from 2.4 to 2.3 results at once. □

proposition_2_4.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.WayBelow.WayBelow

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

variable {D : Type u} [CompleteLattice D]

theorem proposition_2_4 :
    ContinuousLattice D ↔
      ∀ y : D, IsLUB {a : D | ∃ U, ScottOpen U ∧ y ∈ U ∧ a = sInf U} y :=
  isContinuousLattice_iff_isLUB_sInf_nhds

end DomainTheory.ContinuousLattice
```

Limits and convergence What is the idea of this definition? A continuous lattice is more special than a complete lattice: not only are lubs to be limits but every element must be a limit from below. This rather rough remark can be made more precise. In any complete lattice D define the *principal limit* of a net $x : I \to D$ by the formula:

$$\lim\langle x_i : i \in I\rangle = \bigsqcup\{\sqcap x_j : j \geq i : i \in I\}.$$

Then specify that x converges to $y \in D$ iff

$$y \sqsubseteq \lim\langle\{x_i : i \in I\rangle\}.$$

Having a notion of convergence, we can then say that $U \subseteq D$ is open iff every net converging to an element of U is eventually in U. This gives nothing more than what we have called the induced topology above, as is easily checked. But now being in possession of a topology, we can redefine convergence in the usual way. Question: when do the two notions of convergence agree? Answer: if and only if D is a continuous lattice.

For obviously by construction the limit definition of convergence implies the topological. Now if D is a continuous lattice and x converges to y topologically, consider an open $U \subseteq D$ with $y \in U$. For some $i \in I$ we shall have $x_j \in U$ for all $j \geq i$. Therefore

$$\sqcap U \sqsubseteq \{\sqcap x_j : j \geq i \sqsubseteq \lim\langle x_i : i \in I\rangle\}.$$

From the formula of 2.4 it at once follows that $y \sqsubseteq \lim\langle\{x_i : i \in I\rangle\}$. Thus, in continuous lattices, we have shown that the two notions of convergence are the same.

Finally, suppose that the two notions coincide for a complete lattice D. Define a directed set $I = (U, z) : y, z \in U$, where z ranges over D and U over open subsets of D. This set is directed by the relation: $(U, z) \leq (V, w)$ iff $U \supseteq V$. Let $x : I \to D$ be given by: $x(U, z) = z$. Then x is a net converging to y topologically. But

$$\lim\langle x_i : i \in I\rangle = \bigsqcup\{\sqcap U : y \in U\}.$$

In this way we see that the assumption about the two styles of convergence implies that D is a continuous lattice in view of 2.4.

In T_0-spaces continuous functions are always monotonic (i.e. $\sqsubseteq$-preserving). For continuous lattices, by virtue of the remarks we have just made about limits, we can define the continuity of $f : D \to D'$ to mean that

$$f(\lim\langle\{x_i : i \in I\rangle) \sqsubseteq \lim'\langle f(x_i) : i \in I\rangle\}$$

for all nets $x : I \to D$. This is all very fine, but general limits are messy to work with; we shall find it easier to state results in terms of lubs as in 2.5–2.7 below.

Before going any deeper, however, we should clear up another point about topologies. Suppose that D is any T_0-space which becomes a complete lattice under its induced partial ordering. Then it is evident from our definitions that every set open in the given topology is also open in the topology induced from the lattice structure. Question: when do the two topologies agree? Answer: a sufficient condition is that the equation:

$$y = \bigsqcup\{\sqcap U : y \in U\}$$

hold for all $y \in D$, where U ranges over the given open sets. Because in that case if V is open in the lattice sense and $y \in V$, then $\sqcap U \in V$ for some set U, open in the given sense, where $y \in U$. But $U \subseteq V$ follows, and so V is a union of given open sets and is itself open in the given topology. Of course this equation implies that D is a continuous lattice by virtue of 2.4. Notice that by the same token the sets of the form $\{y \in D : x \ll y\}$ will form a basis for the open sets of a continuous lattice.

hold for all $y \in D$, where U ranges over the given open sets. Because in that case if V is open in the lattice sense and $y \in V$, then $\sqcap U \in V$ for some set U, open in the given sense, where $y \in U$. But $U \subseteq V$ follows, and so V is a union of given open sets and is itself open in the given topology. Of course this equation implies that D is a continuous lattice by virtue of 2.4. Notice that by the same token the sets of the form $\{y \in D : x \ll y\}$ will form a basis for the open sets of a continuous lattice.

Idempotent fixed points On a complete lattice L, write $e : L \to L$ for an endomap. We say e is **idempotent** when $e \circ e = e$ (equivalently $e(ex) = ex$ for all x). An element $x \in L$ is a **fixed point** of e when $e(x) = x$.

Scott's discussion after Theorem 2.12 treats a retraction $j : \mathcal{P}I \to \mathcal{P}I$ as idempotent and identifies its range with $\{X : j(X) = X\}$. The proof of Theorem 2.12 uses the same fixed-point subtype for the idempotent $e = s \circ r$ built from an injective-space retraction into a Sierpiński power.

Definition (`IdempotentFixedPoint`). For $e : L \to L$ on a complete lattice L, **`IdempotentFixedPoint e`** is the subtype $\{x \in L \mid ex = x\}$.

`IdempotentFixedPoint.lean`

```
module

public import Mathlib.Order.CompleteLattice.Basic

@[expose] public section

namespace DomainTheory.ContinuousLattice

variable {L : Type*} [CompleteLattice L]
```

```
/-- Fixed points `{x | e x = x}` of an endomap on a complete lattice. -/
abbrev IdempotentFixedPoint (e : L → L) : Type _ := {x : L // e x = x}

end DomainTheory.ContinuousLattice
```

Supremum on fixed points When e is idempotent on a complete lattice L, the fixed-point subtype **`IdempotentFixedPoint e`** needs a join operation: ambient suprema of fixed points need not be fixed, but applying e after taking the supremum lands back in the fixed-point set. The lemmas below live in namespace **`IdempotentFixedPoint.supremumSet`** in `IdempotentFixedPoint/supremumSet.lean`. See Idempotent fixed points for the subtype definition. The **`CompleteLattice`** instance built from this **`SupSet`** is Complete lattice on fixed points.

Definition (`IdempotentFixedPoint.supremumSet`). Given $e(ex) = ex$, the **`SupSet`** instance sends a set S of fixed points to $e(\sup\{\mathrm{val}\, k : k \in S\})$ in L, packaged as a fixed point using idempotence.

Proof. Definition only (`supremumSet` in Lean). □

Theorem (`IdempotentFixedPoint.supremumSet.isLUB`). With **`IdempotentFixedPoint.supremumS`**`sSup S` is a least upper bound of S in the fixed-point order (requires **`Monotone e`**).

Proof. Write $u = e(\sup \mathrm{val}\, S)$ for the proposed supremum.

Upper bound. If $k \in S$, then $\mathrm{val}\, k \le \sup \mathrm{val}\, S$ in L, so $e(\mathrm{val}\, k) \le u$ by monotonicity; fixedness gives $\mathrm{val}\, k = e(\mathrm{val}\, k) \le u$.

Least. If w is an upper bound of S among fixed points, then $\mathrm{val}\, k \le \mathrm{val}\, w$ for all $k \in S$, hence $\sup \mathrm{val}\, S \le \mathrm{val}\, w$; monotonicity yields $u \le e(\mathrm{val}\, w) = \mathrm{val}\, w$. □

`supremumSet.lean`

```
module

public import DomainTheory.ContinuousLattice.ContinuousLattices.IdempotentFixedPoint

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

variable {L : Type*} [CompleteLattice L] {e : L → L}

namespace IdempotentFixedPoint

/-- Supremum in the fixed-point set: `e` applied to the ambient supremum. -/
@[reducible] noncomputable def supremumSet (hidem : ∀ x, e (e x) = e x) :
    SupSet (IdempotentFixedPoint e) :=
  ⟨fun S => ⟨e (sSup (Subtype.val '' S)), hidem _⟩⟩

namespace supremumSet

theorem isLUB (hidem : ∀ x, e (e x) = e x) (hmono : Monotone e) :
    letI := IdempotentFixedPoint.supremumSet hidem
    ∀ S : Set (IdempotentFixedPoint e), IsLUB S (sSup S) := by
  let := IdempotentFixedPoint.supremumSet hidem
  intro S
  constructor
```

```
  · intro k hk
    rw [Subtype.coe_le_coe.symm, Subtype.coe_mk]
    show (k : L) ≤ e (sSup (Subtype.val '' S))
    calc (k : L) = e k := k.2.symm
      _ ≤ e (sSup (Subtype.val '' S)) :=
          hmono (le_sSup (Set.mem_image_of_mem _ hk))
  · intro w hw
    rw [Subtype.coe_le_coe.symm, Subtype.coe_mk]
    show e (sSup (Subtype.val '' S)) ≤ (w : L)
    calc e (sSup (Subtype.val '' S)) ≤ e (w : L) := by
          refine hmono (sSup_le ?_)
          rintro _ ⟨k, hk, rfl⟩
          exact hw hk
      _ = (w : L) := w.2

end supremumSet

end IdempotentFixedPoint

end DomainTheory.ContinuousLattice
```

Complete lattice on fixed points Once **`IdempotentFixedPoint.supremumSet`** provides suprema on fixed points, Mathlib's **`completeLatticeOfSup`** turns that **`SupSet`** into a full **`CompleteLattice`** on **`IdempotentFixedPoint e`**, using **`supremumSet.isLUB`** for arbitrary (not merely directed) joins. The lemmas below live in namespace **`IdempotentFixedPoint.completeLattice`** in `IdempotentFixedPoint/completeLattice.lean`. Prerequisites: Supremum on fixed points. Scott continuity and subspace topology are in `IdempotentFixedPoint/scottContinuous.lean`.

Definition (`IdempotentFixedPoint.completeLattice`). Given idempotent e and **`Monotone e`**, install **`supremumSet`**, then apply **`completeLatticeOfSup`** with witness **`supremumSet.isLUB`**.

Proof. `completeLatticeOfSup` from the **`SupSet`** and **`isLUB`** lemmas already proved in `supremumSet.lean`. □

Theorem (`IdempotentFixedPoint.completeLattice.coe`). With **`IdempotentFixedPoint.complet`** coercion to L sends `sSup S` to $e(\sup\{\mathrm{val}\, k : k \in S\})$.

Proof. Definitional: `sSup` for this instance is **`supremumSet`**, and the subtype coercion is the underlying value of that fixed point (`rfl`). □

`completeLattice.lean`

```
module

public import DomainTheory.ContinuousLattice.ContinuousLattices.IdempotentFixedPoint.
    supremumSet

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

variable {L : Type*} [CompleteLattice L] {e : L → L}

namespace IdempotentFixedPoint
```

```
@[reducible] noncomputable def completeLattice (hidem : ∀ x, e (e x) = e x) (hmono :
    Monotone e) :
    CompleteLattice (IdempotentFixedPoint e) :=
  letI := supremumSet hidem
  completeLatticeOfSup (IdempotentFixedPoint e) (supremumSet.isLUB hidem hmono)

namespace completeLattice

theorem coe (hidem : ∀ x, e (e x) = e x) (hmono : Monotone e)
    (S : Set (IdempotentFixedPoint e)) :
    letI := IdempotentFixedPoint.completeLattice hidem hmono
    ((sSup S : IdempotentFixedPoint e) : L) = e (sSup (Subtype.val '' S)) := rfl

end completeLattice

end IdempotentFixedPoint

end DomainTheory.ContinuousLattice
```

Injective space homeomorphic to a Scott continuous lattice This is the **constructive half** of Theorem 2.12 before the biconditional is stated: from injectivity alone (Corollary 1.6, Sierpiński power, idempotent fixed points, Propositions 2.9–2.10) one builds a **continuous lattice** and a **homeomorphism** to it with **Scott** topology. See Idempotent fixed points for the fixed-point subtype used in the proof. The full iff is Theorem 2.12; when a lattice order and topology are already given and specialization equals $\leq$, see Specialization equals the given complete-lattice order on injective T0 spaces.

Theorem (`injective_homeomorph_to_continuousLatticeScott`). If D is an injective T_0 space, then there exist a complete lattice E, a **`ContinuousLattice`** structure on E, and a homeomorphism $D \cong E$ where E carries its **Scott** topology.

Proof. Retract D into a Sierpiński power; form the idempotent $e = s \circ r$; take **`IdempotentFixedPoint e`** with **`completeLattice`**, **`isContinuousLattice`**, and **`scottTopology`**; homeomorph D to the fixed-point set as a subspace. □

`injective_homeomorph_to_continuousLatticeScott.lean`

```
module

public import DomainTheory.ContinuousLattice.Constructions.scottTopology
public import DomainTheory.ContinuousLattice.ContinuousLattices.IdempotentFixedPoint.
    scottContinuous
public import DomainTheory.ContinuousLattice.Injective.corollary_1_6
public import DomainTheory.ContinuousLattice.ScottMaps.continuous_preservesDirectedSup
public import DomainTheory.ContinuousLattice.ScottMaps.preservesDirectedSup_monotone

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

universe u
```

```
/-- An injective `T₀` space is homeomorphic to a continuous lattice under its Scott
    topology. -/
theorem injective_homeomorph_to_continuousLatticeScott {D : Type u} [TopologicalSpace
    D]
    [T0Space D] (hD : InjectiveSpace.{u, u} D) :
    ∃ (E : Type u) (inst : CompleteLattice E),
      @ContinuousLattice E inst ∧
        Nonempty (@Homeomorph D E _ (@scottTopologicalSpace E inst)) := by
  obtain ⟨ι, ⟨R⟩⟩ := (corollary_1_6 D).1 hD

  have hidem : ∀ x, R.section' (R.retraction (R.section' (R.retraction x)))
      = R.section' (R.retraction x) :=
    fun x => congrArg R.section' (R.retraction_section (R.retraction x))
  have hL : ContinuousLattice (ι → Prop) := proposition_2_9.sierpinskiPower ι

  have hcont_e : @Continuous (ι → Prop) (ι → Prop) scottTopologicalSpace
    scottTopologicalSpace
      (fun x => R.section' (R.retraction x)) := by
    rw [scottTopology.sierpinskiPower ι]
    exact R.section'.continuous.comp R.retraction.continuous
  have hsc : PreservesDirectedSup (fun x => R.section' (R.retraction x)) :=
    continuous_preservesDirectedSup hcont_e
  refine ⟨IdempotentFixedPoint (fun x => R.section' (R.retraction x)),
    IdempotentFixedPoint.completeLattice hidem (preservesDirectedSup_monotone hsc),
    IdempotentFixedPoint.isContinuousLattice hidem hsc hL, ?_⟩

  have heq : (@scottTopologicalSpace (IdempotentFixedPoint (fun x => R.section' (R.
    retraction x)))
      (IdempotentFixedPoint.completeLattice hidem (preservesDirectedSup_monotone hsc))
    )
      = instTopologicalSpaceSubtype := by
    rw [IdempotentFixedPoint.scottTopology hidem hsc hL, scottTopology.sierpinskiPower
     ι]
    rfl
  rw [heq]

  have hfix : ∀ d, (fun x => R.section' (R.retraction x)) (R.section' d) = R.section' d
     :=
    fun d => congrArg R.section' (R.retraction_section d)
  exact ⟨{
    toFun := fun d => ⟨R.section' d, hfix d⟩
    invFun := fun k => R.retraction k.1
    left_inv := fun d => R.retraction_section d
    right_inv := fun k => Subtype.ext k.2
    continuous_toFun := by exact R.section'.continuous.subtype_mk hfix
    continuous_invFun := by exact R.retraction.continuous.comp continuous_subtype_val
    }⟩

end DomainTheory.ContinuousLattice
```

Theorem 2.12 **2.12 Theorem.** The injective spaces are exactly the continuous lattices.

This theorem is an immediate consequence of the preceding results: an injective space is a retract of a power of $\mathbb{O}$. But $\mathbb{O}$ is a finite lattice $(\bot \sqsubseteq \top)$, and so the given space is a continuous lattice under its induced topology. On the other hand a continuous lattice is injective. It remains then to prove 2.9–2.11.

The library splits the two directions: Injective space homeomorphic to a Scott continuous lattice (**`injective_homeomorph_to_continuousLatticeScott`**) is the injective $\Rightarrow$ homeomorph-to-Scott-CL step; **`proposition_2_11`** is continuous lattice $\Rightarrow$ injective. When a complete lattice and topology are already on the type and specialization equals $\leq$, Specialization equals the given complete-lattice order on injective T0 spaces refines the constructive direction (**`continuousLattice_scottTopology_of_injective`**).

Theorem (`theorem_2_12`). For a T_0 space D, **`InjectiveSpace D`** iff there exist a complete lattice E, a **`ContinuousLattice`** instance on E, and a homeomorphism $D \cong E$ with E carrying its Scott topology.

Proof. In `theorem_2_12.lean`: the forward implication is **`injective_homeomorph_to_continuousLatticeScott`**; the converse applies **`proposition_2_11`** and **`proposition_1_4`** to a witnessing homeomorphism. □

`theorem_2_12.lean`

```
module

public import DomainTheory.ContinuousLattice.Constructions.proposition_2_11
public import DomainTheory.ContinuousLattice.ContinuousLattices.
    injective_homeomorph_to_continuousLatticeScott
public import DomainTheory.ContinuousLattice.Injective.proposition_1_4

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

universe u

theorem theorem_2_12 {D : Type u} [TopologicalSpace D] [T0Space D] :
    InjectiveSpace.{u, u} D ↔
      ∃ (E : Type u) (inst : CompleteLattice E),
        @ContinuousLattice E inst ∧
          Nonempty (@Homeomorph D E _ (@scottTopologicalSpace E inst)) := by
  refine ⟨injective_homeomorph_to_continuousLatticeScott, ?_⟩
  rintro ⟨E, inst, hE, ⟨h⟩⟩
  let τE : TopologicalSpace E := @scottTopologicalSpace E inst
  exact @proposition_1_4 E D τE _ (proposition_2_11 hE)
    ⟨⇑h, h.continuous⟩ ⟨⇑h.symm, h.symm.continuous⟩ (fun d => h.left_inv d)

end DomainTheory.ContinuousLattice
```

Order isomorphism is a Scott homeomorphism Given complete lattices A and B and an order isomorphism $e : A \cong B$, Scott's topology on each side is expressed through **Scott-open** sets (`ScottOpen`), not merely through the order. **`ScottOpen.preimage_orderIso`** shows Scott-open sets pull back along e and e^{-1}; with **`ScottOpen.isOpen_iff`**, e is a **homeomorphism** for **`scottTopologicalSpace`** on A and B. This lemma is used in Specialization equals the given complete-lattice order on injective T0 spaces to align Scott on the given type with topology induced along an order iso built from injectivity.

Definition (`orderIsoScottHomeomorph`). For complete lattices A and B and $e : A \cong$

B, **`orderIsoScottHomeomorph e`** is the homeomorphism $A \cong B$ with both sides carrying **`scottTopologicalSpace`**.

Proof. Open sets are exactly Scott-open (`ScottOpen.isOpen_iff`); continuity in each direction is **`ScottOpen.preimage_orderIso`** for e and e^{-1}. □

`orderIsoScottHomeomorph.lean`

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ScottOpen

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

universe u

variable {A B : Type u} [latticeA : CompleteLattice A] [latticeB : CompleteLattice B]

noncomputable def orderIsoScottHomeomorph (e : A ≃o B) :
    @Homeomorph A B (@scottTopologicalSpace A latticeA)
      (@scottTopologicalSpace B latticeB) := by
  letI : TopologicalSpace A := @scottTopologicalSpace A latticeA
  letI : TopologicalSpace B := @scottTopologicalSpace B latticeB
  letI : Preorder A := latticeA.toPreorder
  letI : Preorder B := latticeB.toPreorder
  exact {
  toEquiv := e.toEquiv
  continuous_toFun := by
    rw [continuous_def]
    intro U hU
    exact ScottOpen.isOpen_iff.mpr
      (ScottOpen.preimage_orderIso e (ScottOpen.isOpen_iff.mp hU))
  continuous_invFun := by
    rw [continuous_def]
    intro U hU
    exact ScottOpen.isOpen_iff.mpr
      (ScottOpen.preimage_orderIso e.symm (ScottOpen.isOpen_iff.mp hU))
  }

end DomainTheory.ContinuousLattice
```

Specialization equals the given complete-lattice order on injective T0 spaces Theorem 2.12 and Injective space homeomorphic to a Scott continuous lattice show that an injective T_0 space is homeomorphic to **some** Scott continuous lattice. In **inverse limits** (and similar setups) one already has a **complete lattice** and **topology** on the type, and **`SpecializationPreorder`** is known to agree with that lattice's $\leq$. This note is the transfer lemma: promote the existential homeomorphism to **`ContinuousLattice`** and **Scott** for **that** data.

Primary use: Proposition 4.1 and **`scottTopology_eq_induced_pi`**, after injectivity and **`specializationPreorder_iff`** are available on the inverse limit. Scott topology along an or-

der iso is Order isomorphism is a Scott homeomorphism.

Theorem (`continuousLattice_scottTopology_of_injective`). Let A be a complete lattice with topology τ_A. If A is T_0 and injective, and for all $x, y \in A$ we have specialization $x \rightsquigarrow y$ iff $x \leq_A y$, then A is a **`ContinuousLattice`** for $\leq_A$ and τ_A equals the **Scott** topology for $\leq_A$.

Proof. **`injective_homeomorph_to_continuousLatticeScott`** gives E, a Scott **`ContinuousLattice`** on E, and a homeomorphism $h : A \cong E$.

Order iso. **`SpecializationPreorder.scott_iff`**, **`SpecializationPreorder.map`**, and `hspec` show h is an order isomorphism $e : A \cong E$.

Continuous lattice. **`ContinuousLattice.orderIso e`**.

Scott topology. **`orderIsoScottHomeomorph`** (see linked note) identifies Scott on A with the topology induced from Scott on E along e; **`Homeomorph.isInducing`** matches τ_A with the same induced topology along h. □

After Theorem 2.12 Following Theorem 2.12, Scott steps back from the proof to compare two pictures of the same equivalence.

The **lattice approach** to injective spaces gives a completely "internal" characterization: the types are complete lattices; **way-below** ($\ll$, Definition 2.3) is defined lattice-theoretically by

$$x \ll y \quad \text{iff} \quad \text{whenever } y \sqsubseteq \bigsqcup Z \text{ and } Z \subseteq D \text{ is directed,}$$

then $x \sqsubseteq z$ for some $z \in Z$; and every $y \in D$ satisfies

$$y = \bigsqcup \{x \in D : x \ll y\}.$$

That makes D a continuous lattice with the sets $\{y \in D : x \ll y\}$ as a basis for the topology. Such T_0-spaces are injective, every injective space arises this way, and the lattice structure is uniquely determined by the topology. Furthermore, as in the proof of 2.11, injectivity can be exhibited by an explicit extension formula.

The **retract approach** should also be considered. Cartesian powers $\mathbb{O}^I$ are simple: as lattices they are Boolean algebras of all subsets of I. The topology has as a basis the classes of sets containing given finite sets (the *weak topology*, cf. Nerode (1959)). A continuous function

$$j : \mathcal{P}I \to \mathcal{P}I$$

is one of "finite character", so

$$j(X) = \bigcup \{j(F) : F \subseteq X\}$$

where $X \subseteq I$ and F ranges over *finite* sets. Such j is a *retraction* iff it is *idempotent* ($j \circ j = j$), so the range is the set of fixed points. As we have seen in Idempotent fixed points,

$$D = \{X \in \mathcal{P}I : j(X) = X\}$$

is a continuous lattice (under $\subseteq$ here), and *every* continuous lattice is isomorphic to one obtained this way. This is a representation theorem, but Scott warns it is not very helpful for proofs.

Finally, any space (any finite family of spaces X, Y, …) embeds as a *subspace* of some continuous lattice D. Since D is injective, every continuous $f : X \to Y$ extends to some $\bar{f} : D \to D$; maps $D \to D$ therefore encode continuous maps on all subspaces—motivation for Function spaces.

1.3.4 Scott maps ✓

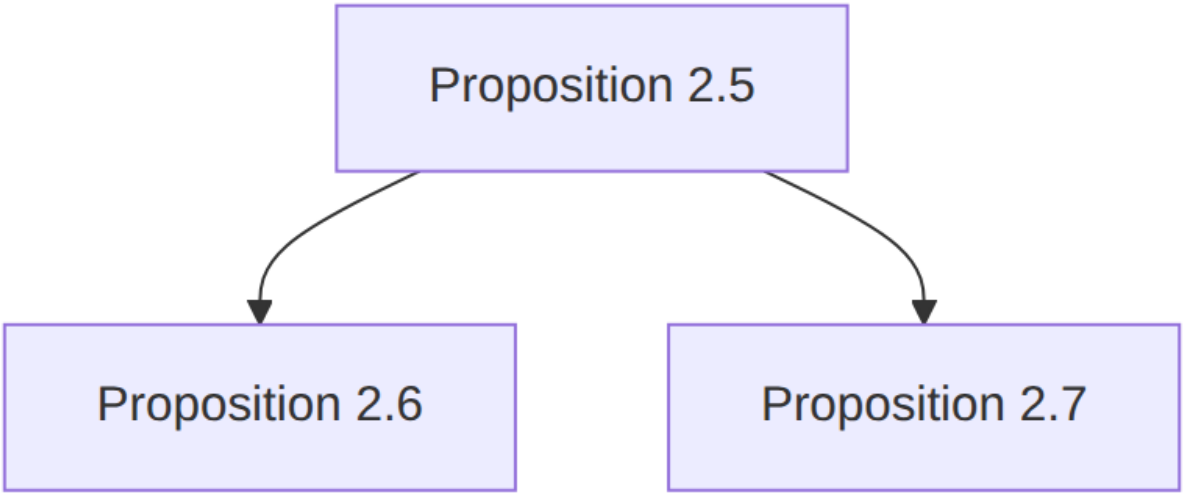

Figure 10: Scott maps ✓.

Proposition 2.5 **2.5 Proposition.** *If D and D' are complete lattices with their induced topologies, then a function $f : D \to D'$ is continuous iff for all directed subsets $S \subseteq D$:*

$$f(\bigsqcup S) = \bigsqcup \{f(x) : x \in S\}.$$

Proof: If $f : D \to D'$ is continuous, the equation follows from the definition of continuous function and the fact that lubs are limits. Assume then that the equation holds for all directed sets S. Let $U' \subseteq D'$ be open in D' and let

$$U = \{x \in D : f(x) \in U'\}.$$

We must show that U is open in D. Note first that if $x \sqsubseteq y$, then $S = x, y$ is directed; hence,

$$f(x \sqcup y) = f(y) = f(x) \sqcup f(y),$$

so $f(x) \sqsubseteq f(y)$. Thus f is monotonic and so U satisfies condition (i). That U satisfies condition (ii) follows at once from the above equation. □

`PreservesDirectedSup.lean`

```
module
public import DomainTheory.ContinuousLattice.WayBelow.ScottOpen

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set Topology
```

```
variable {D D' D'' : Type*} [CompleteLattice D] [CompleteLattice D'] [CompleteLattice
    D'']

def PreservesDirectedSup (f : D → D') : Prop :=
  ∀ {{S : Set D}}, S.Nonempty → DirectedOn (· ≤ ·) S → f (sSup S) = sSup (f '' S)

namespace PreservesDirectedSup

theorem monotone {f : D → D'} (hf : PreservesDirectedSup f) : Monotone f := by
  intro x y hxy
  have hdir : DirectedOn (· ≤ ·) ({x, y} : Set D) := directedOn_pair hxy
  have hS : ({x, y} : Set D).Nonempty := ⟨x, Set.mem_insert _ _⟩
  have hsup : sSup ({x, y} : Set D) = y := by
    calc sSup ({x, y} : Set D) = x ⊔ y := sSup_pair
      _ = y := by apply le_antisymm; exact sup_le hxy le_rfl; exact le_sup_right
  have heq := hf hS hdir
  rw [hsup, Set.image_pair] at heq
  exact le_trans (le_sSup (Set.mem_insert _ _)) heq.symm.le

theorem scottOpen_preimage {f : D → D'} (hf : PreservesDirectedSup f) {U : Set D'}
    (hU : ScottOpen U) : ScottOpen (f ^-1' U) := by
  have hmono := monotone hf
  refine ⟨fun a b hab ha => hU.1 (hmono hab) ha, fun S hS hSdir hmem => ?_⟩
  rw [Set.mem_preimage] at hmem
  have hmem' : sSup (f '' S) ∈ U := by rw [← hf hS hSdir]; exact hmem
  obtain ⟨s, hsS, hsU⟩ := hU.2 (Set.image_nonempty.2 hS)
    (fun s hs t ht => by
      obtain ⟨a, haS, rfl⟩ := hs
      obtain ⟨b, hbS, rfl⟩ := ht
      obtain ⟨c, hcS, hac, hbc⟩ := hSdir a haS b hbS
      exact ⟨f c, Set.mem_image_of_mem f hcS, hmono hac, hmono hbc⟩) hmem'
  obtain ⟨a, haS, rfl⟩ := hsS
  exact ⟨a, haS, Set.mem_preimage.2 hsU⟩

theorem continuous_of {f : D → D'} (hf : PreservesDirectedSup f) :
    @Continuous D D' scottTopologicalSpace scottTopologicalSpace f := by
  rw [continuous_def]
  intro U hU
  rw [ScottOpen.isOpen_iff] at hU ⊢
  exact scottOpen_preimage hf hU

end PreservesDirectedSup

end DomainTheory.ContinuousLattice
```

preservesDirectedSup_monotone.lean

```
module

public import DomainTheory.ContinuousLattice.ScottMaps.PreservesDirectedSup

@[expose] public section

namespace DomainTheory.ContinuousLattice
```

```
open Set

variable {D D' D'' : Type*} [CompleteLattice D] [CompleteLattice D'] [CompleteLattice
    D'']

theorem preservesDirectedSup_monotone {f : D → D'} (hf : PreservesDirectedSup f) :
    Monotone f :=
  PreservesDirectedSup.monotone hf

end DomainTheory.ContinuousLattice
```

scottOpen_preimage.lean

```
module

public import DomainTheory.ContinuousLattice.ScottMaps.PreservesDirectedSup

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set Topology

variable {D D' D'' : Type*} [CompleteLattice D] [CompleteLattice D'] [CompleteLattice
    D'']

theorem scottOpen_preimage {f : D → D'} (hf : PreservesDirectedSup f) {U : Set D'}
    (hU : ScottOpen U) : ScottOpen (f ^-1' U) :=
  PreservesDirectedSup.scottOpen_preimage hf hU

end DomainTheory.ContinuousLattice
```

continuous_preservesDirectedSup.lean

```
module

public import DomainTheory.ContinuousLattice.ScottMaps.PreservesDirectedSup

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set Topology

variable {D D' D'' : Type*} [CompleteLattice D] [CompleteLattice D'] [CompleteLattice
    D'']

theorem continuous_preservesDirectedSup {f : D → D'}
    (hf : @Continuous D D' scottTopologicalSpace scottTopologicalSpace f) :
    PreservesDirectedSup f := by
  have hD : @IsScott D univ _ (Topology.scott D univ) :=
    @IsScott.mk D univ _ (Topology.scott D univ) rfl
  have hD' : @IsScott D' univ _ (Topology.scott D' univ) :=
    @IsScott.mk D' univ _ (Topology.scott D' univ) rfl
  have hsc : ScottContinuous f :=
```

```
    scottContinuousOn_univ.1 <|
      (@Topology.IsScott.scottContinuousOn_iff_continuous D D' _
        (Topology.scott D univ) _ (Topology.scott D' univ) hD' f univ hD
        (fun _ _ _ => trivial)).2 hf
  intro S hS hSdir
  exact (hsc hS hSdir (isLUB_sSup S)).sSup_eq.symm

end DomainTheory.ContinuousLattice
```

proposition_2_5.lean

```
module

public import DomainTheory.ContinuousLattice.ScottMaps.PreservesDirectedSup
import DomainTheory.ContinuousLattice.ScottMaps.continuous_preservesDirectedSup

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set Topology

variable {D D' D'' : Type*} [CompleteLattice D] [CompleteLattice D'] [CompleteLattice
    D'']

theorem proposition_2_5 (f : D → D') :
    (@Continuous D D' scottTopologicalSpace scottTopologicalSpace f) ↔
      PreservesDirectedSup f :=
  ⟨continuous_preservesDirectedSup, fun hf => PreservesDirectedSup.continuous_of hf⟩

end DomainTheory.ContinuousLattice
```

Proposition 2.6 **2.6 Proposition.** *With functions from complete lattices to complete lattices, a function of several variables is continuous in the variables jointly iff it is continuous in the variables separately.*

Proof: It will be sufficient to discuss functions of two variables. The product $D \times D'$ of two complete lattices is a complete lattice, and it is easy to check that the induced topology is the product topology. Since projection is continuous, joint continuity implies separate continuity. To check the converse suppose that

$$f : D \times D' \to D''$$

is a map where the separate continuity holds as follows:

$$f(\bigsqcup S, y) = \bigsqcup f(x, y) : x \in S$$

and

$$f(x, \bigsqcup S') = \bigsqcup \{f(x, y) : y \in S'\}$$

where $S \subseteq D$ and $S' \subseteq D'$ are directed and $x \in D$ and $y \in D'$. Let now

$$S^* \subseteq D \times D'$$

be directed in the product. The projection of S^* to D and of S^* to D' produces directed subsets $S \subseteq D$ and $S' \subseteq D'$. Note that

$$\bigsqcup S^* = (\bigsqcup S, \bigsqcup S').$$

Thus by assumption

$$f(\bigsqcup S^*) = \bigsqcup \{f(x,y) : x \in S, y \in S'\}.$$

But since S^* is directed, $x \in S$ and $y \in S'$ implies $x \sqsubseteq u$ and $y \sqsubseteq v$ for $(u,v) \in S^*$. Thus by monotonicity of f we can show

$$f(\bigsqcup S^*) = \bigsqcup \{f(u,v) : (u,v) \in S^*\}$$

and that gives the joint continuity. □

One of the justifications (by euphony at least) of the term *continuous lattice* is the fact that such spaces allow for so many continuous functions. One indication of this is the result:

proposition_2_6.lean

```
module

public import DomainTheory.ContinuousLattice.ScottMaps.PreservesDirectedSup
public import DomainTheory.ContinuousLattice.ScottMaps.preservesDirectedSup_monotone
public import Mathlib.Topology.Defs.Basic
public import Mathlib.Data.Set.Basic
import Mathlib.Tactic

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set Topology

variable {D D' D'' : Type*} [CompleteLattice D] [CompleteLattice D'] [CompleteLattice
    D'']

theorem proposition_2_6 (f : D × D' → D'') :
    PreservesDirectedSup f ↔
      (∀ y, PreservesDirectedSup fun x => f (x, y)) ∧
        (∀ x, PreservesDirectedSup fun y => f (x, y)) := by
  constructor
  ·
    intro hf
    refine ⟨fun y S hS hSdir => ?_, fun x S hS hSdir => ?_⟩
    · set T : Set (D × D') := (fun x => (x, y)) '' S with hT
      have hTne : T.Nonempty := hS.image _
      have hTdir : DirectedOn (· ≤ ·) T := by
        rintro _ ⟨a, ha, rfl⟩ _ ⟨b, hb, rfl⟩
        obtain ⟨c, hc, hac, hbc⟩ := hSdir a ha b hb
        exact ⟨(c, y), Set.mem_image_of_mem _ hc, ⟨hac, le_rfl⟩, ⟨hbc, le_rfl⟩⟩
      have hfst : Prod.fst '' T = S := by rw [hT, Set.image_image]; simp
      have hsnd : Prod.snd '' T = {y} := by rw [hT, Set.image_image]; exact hS.
    image_const y
```

```
    have hsupT : sSup T = (sSup S, y) := by
      have e1 : (sSup T).1 = sSup S := by rw [Prod.fst_sSup, hfst]
      have e2 : (sSup T).2 = y := by rw [Prod.snd_sSup, hsnd, sSup_singleton]
      exact Prod.ext_iff.mpr ⟨e1, e2⟩
    have h := hf hTne hTdir
    rw [hsupT, hT, Set.image_image] at h
    simpa using h
  · set T : Set (D × D') := (fun y => (x, y)) '' S with hT
    have hTne : T.Nonempty := hS.image _
    have hTdir : DirectedOn (· ≤ ·) T := by
      rintro _ ⟨a, ha, rfl⟩ _ ⟨b, hb, rfl⟩
      obtain ⟨c, hc, hac, hbc⟩ := hSdir a ha b hb
      exact ⟨(x, c), Set.mem_image_of_mem _ hc, ⟨le_rfl, hac⟩, ⟨le_rfl, hbc⟩⟩
    have hfst : Prod.fst '' T = {x} := by rw [hT, Set.image_image]; exact hS.
  image_const x
    have hsnd : Prod.snd '' T = S := by rw [hT, Set.image_image]; simp
    have hsupT : sSup T = (x, sSup S) := by
      have e1 : (sSup T).1 = x := by rw [Prod.fst_sSup, hfst, sSup_singleton]
      have e2 : (sSup T).2 = sSup S := by rw [Prod.snd_sSup, hsnd]
      exact Prod.ext_iff.mpr ⟨e1, e2⟩
    have h := hf hTne hTdir
    rw [hsupT, hT, Set.image_image] at h
    simpa using h
.
  rintro ⟨h1, h2⟩ Sstar hne hdir
  have hmono1 : ∀ y, Monotone fun x => f (x, y) := fun y =>
  preservesDirectedSup_monotone (h1 y)
  have hmono2 : ∀ x, Monotone fun y => f (x, y) := fun x =>
  preservesDirectedSup_monotone (h2 x)
  have hmono : Monotone f := by
    rintro ⟨a, b⟩ ⟨c, d⟩ hpq
    exact le_trans (hmono1 b hpq.1) (hmono2 c hpq.2)
  have hSne : (Prod.fst '' Sstar).Nonempty := hne.image _
  have hS'ne : (Prod.snd '' Sstar).Nonempty := hne.image _
  have hSdir : DirectedOn (· ≤ ·) (Prod.fst '' Sstar) := hdir.fst
  have hS'dir : DirectedOn (· ≤ ·) (Prod.snd '' Sstar) := hdir.snd
  have hsupStar : sSup Sstar = (sSup (Prod.fst '' Sstar), sSup (Prod.snd '' Sstar))
  :=
    Prod.ext_iff.mpr ⟨Prod.fst_sSup _, Prod.snd_sSup _⟩
  apply le_antisymm
  · rw [hsupStar]
    have e1 : f (sSup (Prod.fst '' Sstar), sSup (Prod.snd '' Sstar))
        = sSup ((fun x => f (x, sSup (Prod.snd '' Sstar))) '' (Prod.fst '' Sstar))
  :=
      h1 (sSup (Prod.snd '' Sstar)) hSne hSdir
    rw [e1]
    apply sSup_le
    rintro _ ⟨x, hx, rfl⟩
    show f (x, sSup (Prod.snd '' Sstar)) ≤ sSup (f '' Sstar)
    have e2 : f (x, sSup (Prod.snd '' Sstar))
        = sSup ((fun y => f (x, y)) '' (Prod.snd '' Sstar)) :=
      h2 x hS'ne hS'dir
    rw [e2]
    apply sSup_le
    rintro _ ⟨y, hy, rfl⟩
    show f (x, y) ≤ sSup (f '' Sstar)
```

```
      obtain ⟨p, hpS, hpfst⟩ := hx
      obtain ⟨q, hqS, hqsnd⟩ := hy
      obtain ⟨r, hrS, hpr, hqr⟩ := hdir p hpS q hqS
      have hxr : x ≤ r.1 := hpfst ▸ hpr.1
      have hyr : y ≤ r.2 := hqsnd ▸ hqr.2
      calc f (x, y) ≤ f (r.1, r.2) := hmono ⟨hxr, hyr⟩
        _ = f r := by rw [Prod.mk.eta]
        _ ≤ sSup (f '' Sstar) := le_sSup (Set.mem_image_of_mem f hrS)
    · apply sSup_le
      rintro _ ⟨p, hp, rfl⟩
      exact hmono (le_sSup hp)

end DomainTheory.ContinuousLattice
```

Proposition 2.7 **2.7 Proposition.** *In a continuous lattice D the finitary lattice operations $\sqcup$ and $\sqcap$ are continuous.*

Proof: It is trivial to show that $\sqcup$ is continuous in every complete lattice; this is not so for $\sqcap$. In view of 2.6 we need only show

$$x \sqcap \bigsqcup S = \bigsqcup \{x \sqcap y : y \in S\}$$

for every directed $S \subseteq D$. In fact it is enough to show

$$x \sqcap \bigsqcup S \sqsubseteq \bigsqcup \{x \sqcap y : y \in S\}$$

because the opposite inequality is valid in all complete lattices. In view of the fact that D is continuous, it is enough to show that

$$t \ll x \sqcap \bigsqcup S \text{ implies } t \sqsubseteq \bigsqcup \{x \sqcap y : y \in S\}.$$

So assume $t \ll x \sqcap \bigsqcup S$. Then $t \sqsubseteq x \sqcap \bigsqcup S \sqsubseteq x$. Also $t \ll \bigsqcup S$ because $x \sqcap \bigsqcup S \sqsubseteq \bigsqcup S$. Thus $t \ll y$ for some $y \in S$ since the set

$$\{z \in D : t \ll z\}$$

is open. But then $t \sqsubseteq y$, and so $t \sqsubseteq x \sqcap y$, and the result follows. □

It is now time to provide some examples of continuous lattices.

meet_preservesDirectedSup.lean

```
module
public import DomainTheory.ContinuousLattice.WayBelow.WayBelow
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice

public import DomainTheory.ContinuousLattice.ScottMaps.PreservesDirectedSup
public import Mathlib.Topology.Defs.Basic
public import Mathlib.Data.Set.Basic

@[expose] public section

namespace DomainTheory.ContinuousLattice
```

```
open Set Topology

variable {D D' D'' : Type*} [CompleteLattice D] [CompleteLattice D'] [CompleteLattice
    D'']

theorem meet_preservesDirectedSup (x : D) (hD : ContinuousLattice D) :
    PreservesDirectedSup (fun z => x ⊓ z) := by
  intro S hS hSdir
  apply le_antisymm
  · have hle : sSup {t | t ≪ x ⊓ sSup S} ≤ sSup (Set.image (fun z => x ⊓ z) S) := by
      apply sSup_le
      intro t ht
      obtain ⟨w, hwS, ht_w⟩ := (WayBelow.sSup_iff hS hSdir).1 (ht.trans_le inf_le_right
    )
      have hmem : x ⊓ w ∈ Set.image (fun z : D => x ⊓ z) S :=
        Set.mem_image_of_mem (fun z => x ⊓ z) hwS
      have hbound : x ⊓ w ≤ sSup (Set.image (fun z => x ⊓ z) S) := le_sSup hmem
      exact (le_inf (ht.le.trans inf_le_left) ht_w.le).trans hbound
    dsimp only
    rw [← hD.sSup_wayBelow (x ⊓ sSup S)]
    exact hle
  · apply sSup_le
    intro z hz
    obtain ⟨w, hwS, rfl⟩ := hz
    exact inf_le_inf le_rfl (le_sSup hwS)

end DomainTheory.ContinuousLattice
```

proposition_2_7.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.Specialization.scottTopologicalSpace
public import DomainTheory.ContinuousLattice.ScottMaps.meet_preservesDirectedSup
public import Mathlib.Topology.Defs.Basic
public import Mathlib.Data.Set.Basic

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set Topology

variable {D D' D'' : Type*} [CompleteLattice D] [CompleteLattice D'] [CompleteLattice
    D'']

namespace proposition_2_7

theorem sup :
    @Continuous (D × D) D scottTopologicalSpace scottTopologicalSpace (fun p : D × D
    => p.1 ⊔ p.2) :=
  PreservesDirectedSup.continuous_of <| by
    intro S hS hSdir
    simpa using (ScottContinuous.sup₂ (β := D) (d := S) hS hSdir (isLUB_sSup S)).
```

```
    sSup_eq.symm

theorem inf_left (hD : ContinuousLattice D) (y : D) :
    @Continuous D D scottTopologicalSpace scottTopologicalSpace (fun x => x ⊓ y) :=
  PreservesDirectedSup.continuous_of <| by
    intro S' hS' hSdir'
    rw [show (fun x => x ⊓ y) = fun z => y ⊓ z from funext fun x => inf_comm x y]
    have h := meet_preservesDirectedSup y hD
    exact h (S := S') hS' hSdir'

theorem inf_right (hD : ContinuousLattice D) (x : D) :
    @Continuous D D scottTopologicalSpace scottTopologicalSpace (fun y => x ⊓ y) :=
  PreservesDirectedSup.continuous_of (meet_preservesDirectedSup x hD)

end proposition_2_7

end DomainTheory.ContinuousLattice
```

1.3.5 Proposition 2.8 ✓

2.8 Proposition. A finite lattice is a continuous lattice. □

directedOn_finite_sSup_mem.lean

```
module
public import Mathlib.Order.ConditionallyCompleteLattice.Basic
public import Mathlib.Order.Preorder.Finite
public import Mathlib.Basic.Finite.Defs
public import Mathlib.Order.CompleteLattice.Basic
public import Mathlib.Order.UpperLower.Basic
public import Mathlib.Order.Directed
public import Mathlib.Topology.Inseparable
public import Mathlib.Topology.Separation.Basic
public import Mathlib.Topology.Order.ScottTopology
public import Mathlib.Order.DirSupClosed
public import Mathlib.Order.ScottContinuity
public import Mathlib.Topology.ContinuousMap.T0Sierpinski
public import Mathlib.Topology.ContinuousMap.Basic
public import Mathlib.Topology.Sets.Opens

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

variable {D : Type*} [CompleteLattice D]

theorem directedOn_finite_sSup_mem {S : Set D} (hSfin : S.Finite) (hSne : S.Nonempty)
    (hSdir : DirectedOn (· ≤ ·) S) : sSup S ∈ S := by
  obtain ⟨m, hm⟩ := hSfin.exists_maximal hSne
  have hub : m ∈ upperBounds S := by
    intro s hs
    obtain ⟨c, hcS, hmc, hsc⟩ := hSdir m hm.1 s hs
    exact hsc.trans (hm.2 hcS hmc)
```

```
  have hlub : IsLUB S m := ⟨hub, fun b hb => hb hm.1⟩
  rw [hlub.sSup_eq]
  exact hm.1

end DomainTheory.ContinuousLattice
```

proposition_2_8.lean

```
module
public import DomainTheory.ContinuousLattice.WayBelow.WayBelow
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice

public import DomainTheory.ContinuousLattice.Constructions.directedOn_finite_sSup_mem
public import Mathlib.Data.Fintype.EquivFin
public import Mathlib.Basic.Finite.Defs
public import Mathlib.Topology.Defs.Basic
public import Mathlib.Data.Set.Basic

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

variable {D : Type*} [CompleteLattice D]

theorem proposition_2_8 [Finite D] : ContinuousLattice D := by
  refine { out := ?_ }
  intro y
  have hopen : ScottOpen (Set.Ici y) := by
    refine ⟨isUpperSet_Ici y, fun S hSne hSdir hmem => ?_⟩
    exact ⟨sSup S, directedOn_finite_sSup_mem (Set.toFinite S) hSne hSdir, hmem⟩
  have hyy : y ≪ y := WayBelow.self_iff_scottOpen_Ici.mpr hopen
  exact ⟨fun x hx => hx.le, fun b hb => hb hyy⟩

end DomainTheory.ContinuousLattice
```

1.3.6 Proposition 2.9 ✓

2.9 Proposition. The Cartesian product of any number of continuous lattices is a continuous lattice with the induced topology agreeing with the product topology.

proposition_2_9.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.WayBelow
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.Specialization.scottTopologicalSpace
public import DomainTheory.ContinuousLattice.Constructions.piWayBelow
public import DomainTheory.ContinuousLattice.WayBelow.ScottOpen
public import DomainTheory.ContinuousLattice.Constructions.proposition_2_8
public import Mathlib.Topology.Defs.Basic
```

```
@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

variable {D : Type*} [CompleteLattice D]

theorem proposition_2_9 {ι : Type*} (E : ι → Type*) [∀ i, CompleteLattice (E i)]
    (hE : ∀ i, ContinuousLattice (E i)) :
    ContinuousLattice (∀ i, E i) ∧
      (scottTopologicalSpace : TopologicalSpace (∀ i, E i)) =
        @Pi.topologicalSpace ι E (fun _ => scottTopologicalSpace) := by
  classical
  have hprod : ContinuousLattice (∀ i, E i) := by
    refine { out := ?_ }
    intro y
    refine ⟨fun x hx => hx.le, fun b hb => ?_⟩
    rw [Pi.le_def]
    intro i
    rw [← (hE i).sSup_wayBelow (y i)]
    apply sSup_le
    intro a ha
    set e : (∀ j, E j) := Function.update (⊥ : ∀ j, E j) i a with he
    have hei : e i = a := by rw [he]; exact Function.update_self i a _
    have hcyl : e ≪ y := by
      obtain ⟨U, hU, hyiU, hUsub⟩ := ha
      refine ⟨{z : ∀ j, E j | z i ∈ U}, ?_, hyiU, ?_⟩
      · refine ⟨fun z w hzw hz => hU.1 (hzw i) hz, fun S hSne hSdir hmem => ?_⟩
        rw [Set.mem_ofPred_eq, sSup_apply_eq_sSup_image] at hmem
        have hdir' : DirectedOn (· ≤ ·) (Function.eval i '' S) := by
          rintro _ ⟨f, hf, rfl⟩ _ ⟨g, hg, rfl⟩
          obtain ⟨h, hhS, hfh, hgh⟩ := hSdir f hf g hg
          exact ⟨Function.eval i h, ⟨h, hhS, rfl⟩, hfh i, hgh i⟩
        obtain ⟨t, htimg, htU⟩ := hU.2 (hSne.image _) hdir' hmem
        obtain ⟨f, hfS, rfl⟩ := htimg
        exact ⟨f, hfS, htU⟩
      · intro z hz
        rw [Set.mem_Ici, Pi.le_def]
        intro j
        rcases eq_or_ne j i with rfl | hji
        · rw [hei]; exact Set.mem_Ici.1 (hUsub hz)
        · rw [he, Function.update_of_ne hji]; exact bot_le
    have hle : e i ≤ b i := (hb hcyl) i
    rw [hei] at hle
    exact hle
  refine ⟨hprod, ?_⟩
  apply le_antisymm
  · refine le_iInf fun i => ?_
    rw [← continuous_iff_le_induced]
    exact PreservesDirectedSup.continuous_of (fun _ _ _ => sSup_apply_eq_sSup_image)
  · intro U hU
    rw [ScottOpen.isOpen_iff] at hU
    rw [@isOpen_iff_forall_mem_open _ (@Pi.topologicalSpace ι E (fun _ =>
    scottTopologicalSpace))]
    intro z hz
```

```
    obtain ⟨a, haz, haIci⟩ := exists_wayBelow_Ici_subset hprod hU hz
    obtain ⟨F, hF⟩ := piWayBelow.wayBelow_finite_support haz
    have hproj : ∀ i, a i ≪ z i := fun i => piWayBelow.wayBelow_proj haz i
    choose V hVopen hzV hVsub using hproj
    refine ⟨⋂ i ∈ F, (fun w : ∀ j, E j => w i) ^-1' V i, ?_, ?_, ?_⟩
    · intro w hw
      rw [Set.mem_iInter₂] at hw
      refine haIci (Set.mem_Ici.2 fun j => ?_)
      by_cases hjF : j ∈ F
      · exact Set.mem_Ici.1 (hVsub j (hw j hjF))
      · rw [hF j hjF]; exact bot_le
    · refine @isOpen_biInter_finset (∀ j, E j) ι
        (@Pi.topologicalSpace ι E (fun _ => scottTopologicalSpace)) F
        (fun i => (fun w : ∀ j, E j => w i) ^-1' V i) (fun i _ => ?_)
      have hVi : @IsOpen (E i) scottTopologicalSpace (V i) := ScottOpen.isOpen_iff.mpr
     (hVopen i)
      have hind : @IsOpen _
          (TopologicalSpace.induced (fun w : ∀ j, E j => w i) scottTopologicalSpace)
          ((fun w : ∀ j, E j => w i) ^-1' V i) :=
        (isOpen_induced_iff (t := scottTopologicalSpace)).mpr ⟨V i, hVi, rfl⟩
      exact iInf_le
        (fun i => TopologicalSpace.induced (fun w : ∀ j, E j => w i)
    scottTopologicalSpace) i _ hind
    · rw [Set.mem_iInter₂]
      exact fun i _ => hzV i

namespace proposition_2_9

theorem sierpinskiPower (ι : Type*) : ContinuousLattice (ι → Prop) :=
  (proposition_2_9 (fun _ => Prop) (fun _ => proposition_2_8)).1

end proposition_2_9

end DomainTheory.ContinuousLattice
```

1.3.7 Proposition 2.10 ✓

2.10 Proposition. A retract of a continuous lattice is a continuous lattice with the subspace topology agreeing with the induced topology.

It would seem that the continuous lattices are starting to sound suspiciously like the injective spaces. Indeed, if we can prove the following, the circle will be complete.

proposition_2_10.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

import DomainTheory.ContinuousLattice.ScottMaps.scottOpen_preimage
@[expose] public section

namespace DomainTheory.ContinuousLattice
```

```
open Set Topology TopologicalSpace

universe u v

variable {D : Type u} {D' : Type v}
variable [CompleteLattice D] [CompleteLattice D']

theorem proposition_2_10 (R : ContinuousLatticeRetraction D D') (hD' :
    ContinuousLattice D') :
    ContinuousLattice D ∧
      (scottTopologicalSpace : TopologicalSpace D) =
        TopologicalSpace.induced (R.incl : D → D') scottTopologicalSpace := by
  constructor
  · refine { out := ?_ }
    intro d
    refine ⟨fun x hx => hx.le, fun b hb => ?_⟩
    rw [← R.sSup_image_retr_wayBelow hD' d]
    exact sSup_le fun _ ⟨x', hx', hxeq⟩ => hxeq ▸ hb (R.retr_wayBelow_of_wayBelow_incl
    hx')
  · apply le_antisymm
    · intro U hU
      rw [isOpen_induced_iff (t := scottTopologicalSpace)] at hU
      obtain ⟨V', hV'open, rfl⟩ := hU
      rw [ScottOpen.isOpen_iff] at hV'open ⊢
      exact scottOpen_preimage R.incl_preservesDirectedSup hV'open
    · intro U hU
      rw [ScottOpen.isOpen_iff] at hU
      rw [@isOpen_iff_forall_mem_open _
        (TopologicalSpace.induced (R.incl : D → D') scottTopologicalSpace)]
      intro d hd
      have hmem : sSup (Set.image (R.retr : D' → D) {x' | x' ≪ R.incl d}) ∈ U := by
        rw [R.sSup_image_retr_wayBelow hD' d]; exact hd
      obtain ⟨p, hp, hpU⟩ :=
        hU.2 (R.image_retr_wayBelow_nonempty d) (R.image_retr_wayBelow_directed d)
    hmem
      obtain ⟨x', hx', rfl⟩ := hp
      refine ⟨(R.incl : D → D') ^-1' {z' | x' ≪ z'}, fun z hz => ?_, ?_, hx'⟩
      · have hjle := R.retr.monotone (show x' ≤ R.incl z from (hz : x' ≪ R.incl z).le)
        rw [R.retr_incl z] at hjle
        exact hU.1 hjle hpU
      · rw [isOpen_induced_iff (t := scottTopologicalSpace)]
        exact ⟨{z' | x' ≪ z'}, ScottOpen.isOpen_iff.mpr (ScottOpen.wayBelow x'), rfl⟩

end DomainTheory.ContinuousLattice
```

1.3.8 Proposition 2.11 ✓

2.11 Proposition. Every continuous lattice is an injective space under its induced topology.

proposition_2_11.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.Specialization.scottTopologicalSpace
```

```
public import DomainTheory.ContinuousLattice.Injective.InjectiveSpace
public import DomainTheory.ContinuousLattice.Constructions.scottExtend_continuous
public import DomainTheory.ContinuousLattice.Constructions.
    scottExtend_eq_of_continuous
public import Mathlib.Topology.Defs.Basic
public import Mathlib.Data.Set.Basic

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

variable {D : Type*} [CompleteLattice D]

theorem proposition_2_11 {E : Type*} [CompleteLattice E] (hE : ContinuousLattice E) :
    @InjectiveSpace E scottTopologicalSpace := by
  let : TopologicalSpace E := scottTopologicalSpace
  constructor
  intro X Y _ _ e he f
  exact ⟨⟨scottExtend e f, scottExtend_continuous hE e f⟩,
    fun x => scottExtend_eq_of_continuous hE e he f f.continuous x⟩

end DomainTheory.ContinuousLattice
```

1.3.9 Proof of 2.9 ✓

Proof of 2.9

Let D_i for $i \in I$ be a system of continuous lattices. The product

$$D^* = \prod_{i \in I} D_i$$

is a complete lattice in the usual way and has its induced topology. Suppose $y \in D^*$ and let $i \in I$. Then $y_i \in D_i$. Since D_i is a continuous lattice

$$y_i = \bigsqcup \{x \in D_i : x \ll y_i\}.$$

For $x \in D_i$, let $[x]^i \in D^*$ be defined by:

$$[x]^i_j = \begin{cases} x & \text{if } i = j, \\ \bot & \text{if } i \neq j. \end{cases}$$

Note that since D_i is continuous we have:

$$[y_i]^i = \bigsqcup \{[x]^i : x \ll y_i\},$$

and

$$y = \bigsqcup \{[y_i]^i : i \in I\}.$$

It follows that

$$y = \bigsqcup \bigcap \{z : z_i \in U \text{ for all } i \in I,\ y_i \in U\},$$

where i ranges over I and U over the open subsets of D_i, because

$$[x]^i \sqsubseteq \bigcap \{z : z_i \in U\}, \quad \text{where } U = \{u \in D_i : x \ll u\}.$$

But the sets $\{z : z_i \in U\}$ are open in the product sense, and so

$$y = \bigsqcup \bigcap \{U : y \in U\},$$

where U ranges now over the open subsets of the product topology on D^*. By the remark following 2.4 we conclude that D^* is continuous with the lattice-induced topology being the product topology. □

1.3.10 Continuous lattice retraction ✓

Definition. For complete lattices D and D', a **continuous lattice retraction** of D into D' is a pair of Scott-continuous maps $i : D \to D'$ and $j : D' \to D$ such that $j \circ i = \mathrm{id}_D$. The library packages this as **`ContinuousLatticeRetraction D D'`** with **`incl`** (i), **`retr`** (j), and **`retr_incl`**.

In the namespace **`ContinuousLatticeRetraction`** we have

Theorem (`incl_preservesDirectedSup`). *The inclusion i preserves directed suprema: for every directed set $S \subseteq D$,*

$$i(\bigsqcup S) = \bigsqcup i(S).$$

Proof. i is Scott-continuous as a **`ScottMap`**, and that is exactly preservation of directed suprema. □

Theorem (`image_retr_wayBelow_directed`). *Fix $d \in D$. The set*

$$J_d := \{\, j(x') \mid x' \ll i(d) \,\}$$

is directed in D.

Proof. Given $j(a)$ and $j(b)$ with $a, b \ll i(d)$, the way-below relation is closed under finite suprema, so $a \sqcup b \ll i(d)$; monotonicity of j then yields an upper bound $j(a \sqcup b)$ in J_d below both elements. □

Theorem (`image_retr_wayBelow_nonempty`). *The set J_d is nonempty.*

Proof. $\bot \ll i(d)$ and $j(\bot) \in J_d$. □

Theorem (`sSup_image_retr_wayBelow`). *If D is a continuous lattice, then for every $d \in D$,*

$$\bigsqcup J_d = d.$$

Proof. The set $\{\, x' \mid x' \ll i(d) \,\}$ is directed and nonempty, so j preserves its supremum. On that set the continuous-lattice identity $i(d) = \bigsqcup\{x' \mid x' \ll i(d)\}$ and $j \circ i = \mathrm{id}_D$ give $\bigsqcup J_d = j(i(d)) = d$. □

Theorem (`retr_wayBelow_of_wayBelow_incl`). *If $x' \ll i(d)$ in D', then $j(x') \ll d$ in D.*

Proof. By the definition of $x' \ll i(d)$ there is a Scott-open $U' \subseteq D'$ with $i(d) \in U'$ and $U' \subseteq\!\uparrow x'$. The preimage $i^{-1}(U')$ is Scott-open because i preserves directed suprema; it contains d and every $z \in i^{-1}(U')$ satisfies $x' \le i(z)$, hence $j(x') \le j(i(z)) = z$. So $j(x') \ll d$. □

Definition (`ambientSSup`). *For $S \subseteq D$, the ambient supremum is $i(\bigsqcup S)$ in D' (the join taken in D, then mapped forward).*

Theorem (`retr_ambientSSup_eq_sSup`). *If $S \subseteq D$ is nonempty and directed, then*

$$j\big(i(\bigsqcup S)\big) = \bigsqcup S.$$

Proof. The image $i(S)$ is directed, so $i(\bigsqcup S) = \bigsqcup i(S)$ and j preserves that directed supremum. Pulling back along $j \circ i = \mathrm{id}_D$ on S yields the claim. □

ContinuousLatticeRetraction.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
import DomainTheory.ContinuousLattice.ScottMaps.scottOpen_preimage

@[expose] public section

universe u v

namespace DomainTheory.ContinuousLattice

open Set Finset

variable {D : Type u} {D' : Type v}
variable [CompleteLattice D] [CompleteLattice D']

structure ContinuousLatticeRetraction (D : Type u) (D' : Type v)
    [CompleteLattice D] [CompleteLattice D'] where
  incl : ScottMap D D'
  retr : ScottMap D' D
  retr_incl : ∀ d, retr (incl d) = d

namespace ContinuousLatticeRetraction

theorem incl_preservesDirectedSup (R : ContinuousLatticeRetraction D D') :
    PreservesDirectedSup (R.incl : D → D') :=
  fun _ hS hSdir => R.incl.preservesDirectedSup_coe _ hS hSdir

theorem image_retr_wayBelow_directed (R : ContinuousLatticeRetraction D D') (d : D) :
    DirectedOn (· ≤ ·) (Set.image (R.retr : D' → D) {x' | x' ≪ R.incl d}) := by
  rintro _ ⟨a, ha, rfl⟩ _ ⟨b, hb, rfl⟩
  exact ⟨R.retr (a ⊔ b), ⟨a ⊔ b, WayBelow.sup ha hb, rfl⟩,
    R.retr.monotone le_sup_left, R.retr.monotone le_sup_right⟩

theorem image_retr_wayBelow_nonempty (R : ContinuousLatticeRetraction D D') (d : D) :
    (Set.image (R.retr : D' → D) {x' | x' ≪ R.incl d}).Nonempty :=
  ⟨R.retr ⊥, ⊥, WayBelow.bot _, rfl⟩

theorem sSup_image_retr_wayBelow (R : ContinuousLatticeRetraction D D') (hD' :
    ContinuousLattice D')
    (d : D) :
    sSup (Set.image (R.retr : D' → D) {x' | x' ≪ R.incl d}) = d := by
  have hne : ({x' : D' | x' ≪ R.incl d}).Nonempty := ⟨⊥, WayBelow.bot _⟩
  have hdir : DirectedOn (· ≤ ·) {x' : D' | x' ≪ R.incl d} := WayBelow.directedOn _
  rw [← R.retr.preservesDirectedSup_coe _ hne hdir, hD'.sSup_wayBelow (R.incl d), R.
    retr_incl d]
```

```
theorem retr_wayBelow_of_wayBelow_incl (R : ContinuousLatticeRetraction D D') {d : D}
    {x' : D'}
    (hx' : x' ≪ R.incl d) : R.retr x' ≪ d := by
  obtain ⟨U', hU'open, hd_in, hU'sub⟩ := hx'
  refine ⟨(R.incl : D → D') ^-1' U', scottOpen_preimage R.incl_preservesDirectedSup hU
    'open,
    hd_in, fun z hz => ?_⟩
  have hle : x' ≤ R.incl z := Set.mem_Ici.1 (hU'sub hz)
  have hjle := R.retr.monotone hle
  rw [R.retr_incl z] at hjle
  exact Set.mem_Ici.2 hjle

noncomputable def ambientSSup (R : ContinuousLatticeRetraction D D') (S : Set D) : D'
    :=
  sSup (Set.image (R.incl : D → D') S)

theorem retr_ambientSSup_eq_sSup (R : ContinuousLatticeRetraction D D') (S : Set D)
    (hS : S.Nonempty) (hdir : DirectedOn (· ≤ ·) S) :
    R.retr (ambientSSup R S) = sSup S := by
  unfold ambientSSup
  have hdir' : DirectedOn (· ≤ ·) (Set.image (R.incl : D → D') S) := by
    intro p hp q hq
    obtain ⟨a, ha, rfl⟩ := hp
    obtain ⟨b, hb, rfl⟩ := hq
    obtain ⟨c, hc, hac, hbc⟩ := hdir a ha b hb
    exact ⟨R.incl c, Set.mem_image_of_mem _ hc, R.incl.monotone hac, R.incl.monotone
    hbc⟩
  have hne' : (Set.image (R.incl : D → D') S).Nonempty := Set.image_nonempty.2 hS
  rw [R.retr.preservesDirectedSup_coe (Set.image (R.incl : D → D') S) hne' hdir']
  rw [Set.image_image, Set.image_congr fun a _ => R.retr_incl a]
  simp

end ContinuousLatticeRetraction

end DomainTheory.ContinuousLattice
```

1.3.11 Converse retraction ✓

Definition. Let D and D' be complete lattices and let $i : D \to D'$ be Scott-continuous. The **converse retraction** along i is the map $j : D' \to D$ given by

$$j(x') = \bigsqcup \{x \in D \mid i(x) \le x'\}.$$

The library name is **`ConverseRetraction.ConverseRetraction i`** (`ConverseRetraction.lean`).

In the namespace **`ConverseRetraction`** we have

Theorem (`mono`). *The map $x' \mapsto j(x')$ is monotone.*

Proof. If $a' \le b'$, every x with $i(x) \le a'$ also satisfies $i(x) \le b'$, so the defining set for $j(a')$ is contained in that for $j(b')$ and $j(a') \le j(b')$. □

Theorem (`preservesDirectedSup`). *Suppose $i(\bigsqcup S) = \bigsqcup i(S)$ for every $S \subseteq D$, that $x \ll y$ implies $i(x) \ll i(y)$, and that D is a continuous lattice. Then j preserves directed suprema.*

Proof. For directed $S' \subseteq D'$, one inequality follows from monotonicity: $j(\bigsqcup S')$ is an upper bound of $j(S')$. For the reverse, any x with $i(x) \le \bigsqcup S'$ is way-below that supremum in D', hence way-below some

$x' \in S'$ by directedness; then $x \le j(x') \le \bigsqcup j(S')$. Continuity of D rewrites $j(\bigsqcup S')$ as a supremum of such x. □

Theorem (`incl_converseRetr_le`). *If $i(\bigsqcup S) = \bigsqcup i(S)$ for all S, then for every $x' \in D'$, $i(j(x')) \le x'$.*

Proof. Each element of $\{x \mid i(x) \le x'\}$ maps under i into $\uparrow x'$; take the supremum. □

Theorem (`converseRetr_incl`). *Under the same $\bigsqcup$-preservation, if i is injective, then $j(i(y)) = y$.*

Proof. The set $\{x \mid i(x) \le i(y)\}$ is exactly $\downarrow y$; its supremum is y. □

ConverseRetraction.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.ScottMaps.PreservesDirectedSup
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

-- Namespace and map share the name `ConverseRetraction`.
set_option linter.dupNamespace false

@[expose] public section

universe u v

namespace DomainTheory.ContinuousLattice

open Set

variable {D : Type u} {D' : Type v}
variable [CompleteLattice D] [CompleteLattice D']

namespace ConverseRetraction

noncomputable def ConverseRetraction (i : D → D') (x' : D') : D :=
  sSup {x | i x ≤ x'}

theorem mono (i : D → D') : Monotone (ConverseRetraction i) := by
  intro a b hab
  exact sSup_le_sSup fun _ hx => le_trans hx hab

theorem preservesDirectedSup (i : D → D')
    (_hi : ∀ S : Set D, i (sSup S) = sSup (i '' S))
    (hwb : ∀ {x y : D}, x ≪ y → i x ≪ i y) (hD : ContinuousLattice D) :
    PreservesDirectedSup (ConverseRetraction i) := by
  intro S' hS'ne hS'dir
  apply le_antisymm
  · show sSup {x | i x ≤ sSup S'} ≤ sSup (ConverseRetraction i '' S')
    apply sSup_le
    intro x hx
    have hx' : i x ≤ sSup S' := hx
    rw [← hD.sSup_wayBelow x]
    apply sSup_le
    intro z hz
    have hiz : i z ≪ sSup S' := (hwb hz).trans_le hx'
```

```
    obtain ⟨x', hx'S', hzx'⟩ := (WayBelow.sSup_iff hS'ne hS'dir).1 hiz
    have hz_mem : z ∈ {x | i x ≤ x'} := hzx'.le
    exact le_trans (le_sSup hz_mem) (le_sSup ⟨x', hx'S', rfl⟩)
  · apply sSup_le
    rintro _ ⟨x', hx'S', rfl⟩
    exact mono i (le_sSup hx'S')

theorem incl_converseRetr_le (i : D → D') (hi : ∀ S : Set D, i (sSup S) = sSup (i '' S
    ))
    (x' : D') :
    i (ConverseRetraction i x') ≤ x' := by
  show i (sSup {x | i x ≤ x'}) ≤ x'
  rw [hi]
  exact sSup_le (by rintro _ ⟨x, hx, rfl⟩; exact hx)

theorem converseRetr_incl (i : D → D') (hi : ∀ S : Set D, i (sSup S) = sSup (i '' S))
    (hinj : Function.Injective i) (y : D) :
    ConverseRetraction i (i y) = y := by
  have hset : {x | i x ≤ i y} = Set.Iic y := by
    ext x
    simp only [Set.mem_ofPred_eq, Set.mem_Iic]
    exact ⟨ContinuousLatticeProjection.le_of_incl_le i hi hinj,
      fun hx => ContinuousLatticeProjection.incl_mono_of_preservesSSup i hi hx⟩
  show sSup {x | i x ≤ i y} = y
  rw [hset]
  exact le_antisymm (sSup_le fun _ hx => hx) (le_sSup le_rfl)

end ConverseRetraction

end DomainTheory.ContinuousLattice
```

1.3.12 Continuous lattice projection ✓

Definition. A **continuous lattice projection** is a continuous lattice retraction $i : D \to D'$, $j : D' \to D$ with $j \circ i = \mathrm{id}_D$ that also satisfies $i(j(x')) \le x'$ for all $x' \in D'$. The library extends **`ContinuousLatticeRetraction`** to **`ContinuousLatticeProjection D D'`** with the field **`incl_retr_le`**. Scott's Definition 3.6 uses this data for function-space extensions; Proposition 2.10 and later §3 results build on it.

In the namespace **`ContinuousLatticeProjection`** we have

Theorem (`retr_bot`). *For a projection P, $j(\bot_{D'}) = \bot_D$.*

Proof. $\bot_{D'} \le i(\bot_D)$, so $j(\bot_{D'}) \le j(i(\bot_D)) = \bot_D$; the reverse is $\bot_D \le j(\bot_{D'})$. □

Theorem (`incl_bot`). $i(\bot_D) = \bot_{D'}$.

Proof. By **`incl_retr_le`**, $i(j(\bot_{D'})) \le \bot_{D'}$; with **`retr_bot`**, $i(\bot_D) \le \bot_{D'}$. □

Theorem (`retr_eq_sSup`). *For every $x' \in D'$,*

$$j(x') = \bigsqcup \{\, x \in D \mid i(x) \le x' \,\}.$$

Proof. **`incl_retr_le`** gives $i(j(x')) \le x'$, so $j(x')$ lies in the set and is below its supremum. Any x with $i(x) \le x'$ satisfies $x = j(i(x)) \le j(x')$ by monotonicity of j. □

Theorem (`incl_wayBelow`). *If D is a continuous lattice and $x \ll y$ in D, then $i(x) \ll i(y)$ in D'.*

Proof. Rewrite y as a directed supremum of way-below elements in D' below $i(y)$, pull back along j, and use $x \ll y$ with **`incl_retr_le`** on the approximants. □

Theorem (`incl_injective`). *i is injective.*

Proof. From $i(x) = i(y)$ apply j and **`retr_incl`**. □

Theorem (`incl_sup`). $i(x \sqcup y) = i(x) \sqcup i(y)$.

Proof. Monotonicity gives one inequality; the other uses $x, y \le j(i(x) \sqcup i(y))$ from **`retr_incl`**, then **`incl_retr_le`** at $i(x) \sqcup i(y)$. □

Theorem (`incl_finset_sup`). *For finite $T \subseteq D$, $i(\bigsqcup T) = \bigsqcup i(T)$.*

Proof. Induction on T using **`incl_sup`** and **`incl_bot`**. □

Definition (`finsetSupOf`). *For $S \subseteq D$, let **`finsetSupOf S`** be the set of finite suprema $\bigsqcup T$ with $T \subseteq_{\mathrm{fin}} S$.*

Theorem (`directedOn_finsetSupOf`). *`finsetSupOf S` is directed.*

Proof. Given two finite suprema from $T_1, T_2 \subseteq S$, their common upper bound is the supremum of $T_1 \cup T_2$. □

Theorem (`mem_finsetSupOf_of_mem`). *If $x \in S$, then $x \in \mathrm{finsetSupOf}\ S$.*

Proof. Take the singleton finset $\{x\}$. □

Theorem (`sSup_le_finsetSupOf`). $\bigsqcup \mathrm{finsetSupOf}\ S \le \bigsqcup S$.

Proof. Each finite supremum in **`finsetSupOf S`** is below $\bigsqcup S$. □

Theorem (`le_sSup_finsetSupOf`). $\bigsqcup S \le \bigsqcup \mathrm{finsetSupOf}\ S$.

Proof. Every $x \in S$ appears in **`finsetSupOf S`**. □

Theorem (`sSup_finsetSupOf`). $\bigsqcup S = \bigsqcup \mathrm{finsetSupOf}\ S$.

Proof. Antisymmetry of the two preceding inequalities. □

Theorem (`incl_sSup`). $i(\bigsqcup S) = \bigsqcup i(S)$.

Proof. Empty S uses **`incl_bot`**. Otherwise replace $\bigsqcup S$ by finite suprema via **`sSup_finsetSupOf`**, use directedness and **`incl_finset_sup`**, and compare with the image under i. □

Theorem (`incl_sup_of_preservesSSup`). *If $i(\bigsqcup S) = \bigsqcup i(S)$ for all S, then $i(x \sqcup y) = i(x) \sqcup i(y)$.*

Proof. Write $x \sqcup y$ as $\bigsqcup\{x, y\}$. □

Theorem (`incl_mono_of_preservesSSup`). *Under the same hypothesis, i is monotone.*

Proof. If $x \le y$, apply **`incl_sup_of_preservesSSup`** and read off $i(x) \le i(y)$. □

Theorem (`le_of_incl_le`). *If i is injective and preserves suprema of sets, then $i(x) \le i(y)$ implies $x \le y$.*

Proof. $i(x \sqcup y) = i(y)$ forces $x \sqcup y = y$ by injectivity. □

Building a projection from an inclusion i and the converse retraction is in Converse projection.

`ContinuousLatticeProjection.lean`

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeRetraction

@[expose] public section

universe u v

namespace DomainTheory.ContinuousLattice
```

```
open Set Finset

variable {D : Type u} {D' : Type v}
variable [CompleteLattice D] [CompleteLattice D']

structure ContinuousLatticeProjection (D : Type u) (D' : Type v)
    [CompleteLattice D] [CompleteLattice D']
    extends ContinuousLatticeRetraction D D' where
  incl_retr_le : ∀ d,
    @LE.le D'
      (ChainCompletePartialOrder.instOfCompleteLattice (α := D')).toPartialOrder.
    toPreorder.toLE
      (incl (retr d)) d

namespace ContinuousLatticeProjection

theorem retr_bot (P : ContinuousLatticeProjection D D') : (P.retr : D' → D) ⊥ = ⊥ :=
    by
  have hle : (⊥ : D') ≤ P.incl (⊥ : D) := bot_le
  have heq : (P.retr : D' → D) (P.incl (⊥ : D)) = (⊥ : D) := P.retr_incl (d := (⊥ : D
    ))
  exact le_antisymm (le_trans (P.retr.monotone hle) (le_of_eq heq)) bot_le

theorem incl_bot (P : ContinuousLatticeProjection D D') : P.incl (⊥ : D) = ⊥ :=
  le_antisymm (by simpa [retr_bot P] using P.incl_retr_le (⊥ : D')) bot_le

theorem retr_eq_sSup (P : ContinuousLatticeProjection D D') (x' : D') :
    (P.retr : D' → D) x' = sSup {x | (P.incl : D → D') x ≤ x'} := by
  apply le_antisymm
  · exact le_sSup (show (P.incl : D → D') (P.retr x') ≤ x' from P.incl_retr_le x')
  · refine sSup_le fun x hx => ?_
    calc x = (P.retr : D' → D) (P.incl x) := (P.retr_incl x).symm
      _ ≤ (P.retr : D' → D) x' := P.retr.monotone hx

theorem incl_wayBelow (P : ContinuousLatticeProjection D D') (hD' : ContinuousLattice
    D')
    {x y : D} (h : x ≪ y) : @WayBelow D' _ (P.incl x) (P.incl y) := by
  set W : Set D' := { z' | @WayBelow D' _ z' (P.incl y) }
  have hWne : W.Nonempty := ⟨(⊥ : D'), @WayBelow.bot D' _ (P.incl y)⟩
  have hWdir : DirectedOn (· ≤ ·) W := by
    intro p hp q hq
    exact ⟨p ⊔ q, @WayBelow.sup D' _ p q (P.incl y) hp hq, le_sup_left, le_sup_right⟩
  have hy : y = sSup (Set.image (P.retr : D' → D) W) := by
    rw [← P.retr.preservesDirectedSup_coe W hWne hWdir, hD'.sSup_wayBelow (P.incl y),
      P.retr_incl y]
  have hImgne : (Set.image (P.retr : D' → D) W).Nonempty := by
    obtain ⟨z', hz'⟩ := hWne
    exact ⟨P.retr z', z', hz', rfl⟩
  have hImgdir : DirectedOn (· ≤ ·) (Set.image (P.retr : D' → D) W) := by
    intro p hp q hq
    obtain ⟨a, ha, rfl⟩ := hp
    obtain ⟨b, hb, rfl⟩ := hq
    refine ⟨P.retr (a ⊔ b), ⟨a ⊔ b, @WayBelow.sup D' _ a b (P.incl y) ha hb, rfl⟩, ?_,
    ?_⟩
    · exact P.retr.monotone le_sup_left
    · exact P.retr.monotone le_sup_right
```

```
  have hx : x ≪ sSup (Set.image (P.retr : D' → D) W) := by rwa [← hy]
  obtain ⟨prz, hprz, hxpr⟩ := (WayBelow.sSup_iff hImgne hImgdir).1 hx
  obtain ⟨z', hz', rfl⟩ := hprz
  exact @WayBelow.le_trans D' _ (P.incl x) z' (P.incl y)
    (le_trans (P.incl.monotone hxpr.le) (P.incl_retr_le z')) hz'

theorem incl_injective (P : ContinuousLatticeProjection D D') {x y : D} (h : P.incl x
    = P.incl y) :
    x = y := by
  rw [← P.retr_incl x, ← P.retr_incl y, h]

theorem incl_sup (P : ContinuousLatticeProjection D D') (x y : D) :
    P.incl (x ⊔ y) = P.incl x ⊔ P.incl y := by
  apply le_antisymm
  · have hx : x ≤ P.retr (P.incl x ⊔ P.incl y) :=
      le_trans (le_of_eq (P.retr_incl x).symm) (P.retr.monotone le_sup_left)
    have hy : y ≤ P.retr (P.incl x ⊔ P.incl y) :=
      le_trans (le_of_eq (P.retr_incl y).symm) (P.retr.monotone le_sup_right)
    exact le_trans (P.incl.monotone (sup_le hx hy)) (P.incl_retr_le (P.incl x ⊔ P.incl
     y))
  · exact sup_le (P.incl.monotone le_sup_left) (P.incl.monotone le_sup_right)

theorem incl_finset_sup (P : ContinuousLatticeProjection D D') (T : Finset D) :
    P.incl (T.sup (fun x => x)) = T.sup (fun x => P.incl x) := by
  classical
  refine Finset.induction_on T ?base ?step
  · simp only [sup_empty]
    exact incl_bot P
  · intro a s _ ih
    simp only [sup_insert]
    rw [incl_sup P, ih]

def finsetSupOf (S : Set D) : Set D :=
  { z | ∃ T : Finset D, (∀ x ∈ T, x ∈ S) ∧ z = T.sup id }

theorem directedOn_finsetSupOf (S : Set D) :
    DirectedOn (· ≤ ·) (finsetSupOf S) := by
  classical
  intro a ha b hb
  obtain ⟨T₁, hT₁, rfl⟩ := ha
  obtain ⟨T₂, hT₂, rfl⟩ := hb
  have hunion : (T₁ ∪ T₂).sup id = T₁.sup id ⊔ T₂.sup id := by
    simpa using Finset.sup_union (s₁ := T₁) (s₂ := T₂) (f := id)
  refine ⟨T₁.sup id ⊔ T₂.sup id, ⟨T₁ ∪ T₂, ?_, hunion.symm⟩, le_sup_left, le_sup_right⟩
  intro x hx
  simp only [Finset.mem_union] at hx
  exact hx.elim (hT₁ x) (hT₂ x)

theorem mem_finsetSupOf_of_mem {S : Set D} {x : D} (hx : x ∈ S) :
    x ∈ finsetSupOf S :=
  ⟨{x}, by simp [hx], by simp⟩

theorem sSup_le_finsetSupOf (S : Set D) : sSup (finsetSupOf S) ≤ sSup S :=
  sSup_le fun z hz => by
    obtain ⟨T, hTS, rfl⟩ := hz
    exact Finset.sup_le fun t ht => le_sSup (hTS t ht)
```

```
theorem le_sSup_finsetSupOf (S : Set D) : sSup S ≤ sSup (finsetSupOf S) :=
  sSup_le fun _ hx => le_sSup (mem_finsetSupOf_of_mem hx)

theorem sSup_finsetSupOf (S : Set D) : sSup S = sSup (finsetSupOf S) :=
  le_antisymm (le_sSup_finsetSupOf S) (sSup_le_finsetSupOf S)

theorem incl_sSup (P : ContinuousLatticeProjection D D') (S : Set D) :
    P.incl (sSup S) = sSup (Set.image (P.incl : D → D') S) := by
  rcases S.eq_empty_or_nonempty with hS | hS
  · subst hS
    simp only [sSup_empty, Set.image_empty, incl_bot P]
  · rw [sSup_finsetSupOf S]
    have hdir := directedOn_finsetSupOf S
    have hne : (finsetSupOf S).Nonempty := by
      obtain ⟨x, hx⟩ := hS
      exact ⟨x, mem_finsetSupOf_of_mem hx⟩
    rw [P.incl.preservesDirectedSup_coe (finsetSupOf S) hne hdir]
    apply le_antisymm
    · apply sSup_le
      intro b hb
      obtain ⟨z, hz, rfl⟩ := hb
      obtain ⟨T, hT, rfl⟩ := hz
      have h := incl_finset_sup P T
      conv_lhs => rw [show T.sup id = T.sup (fun x => x) from rfl]
      rw [h]
      apply Finset.sup_le
      intro t ht
      exact le_sSup (Set.mem_image_of_mem (P.incl : D → D') (hT t ht))
    · apply sSup_le
      intro b hb
      obtain ⟨x, hxS, rfl⟩ := (Set.mem_image (P.incl : D → D') S b).1 hb
      exact le_sSup (Set.mem_image_of_mem (P.incl : D → D') (mem_finsetSupOf_of_mem
    hxS))

theorem incl_sup_of_preservesSSup (i : D → D') (hi : ∀ S : Set D, i (sSup S) = sSup (i
     '' S))
    (x y : D) :
    i (x ⊔ y) = i x ⊔ i y := by
  calc i (x ⊔ y) = i (sSup {x, y}) := by rw [sSup_pair]
    _ = sSup (i '' {x, y}) := hi _
    _ = sSup {i x, i y} := by rw [Set.image_pair]
    _ = i x ⊔ i y := sSup_pair

theorem incl_mono_of_preservesSSup (i : D → D') (hi : ∀ S : Set D, i (sSup S) = sSup (
    i '' S)) :
    Monotone i := by
  intro x y hxy
  have h := incl_sup_of_preservesSSup i hi x y
  rw [sup_eq_right.mpr hxy] at h
  rw [h]; exact le_sup_left

theorem le_of_incl_le (i : D → D') (hi : ∀ S : Set D, i (sSup S) = sSup (i '' S))
    (hinj : Function.Injective i) {x y : D} (h : i x ≤ i y) : x ≤ y := by
  have h1 : i (x ⊔ y) = i y := by rw [incl_sup_of_preservesSSup i hi, sup_eq_right.mpr
     h]
```

```
  exact sup_eq_right.mp (hinj h1)

end ContinuousLatticeProjection

end DomainTheory.ContinuousLattice
```

1.3.13 Converse projection ✓

When $i : D \to D'$ is injective, preserves suprema of sets, preserves way-below, and D is a continuous lattice, Scott builds a **continuous lattice projection** from i and the converse retraction (see Converse retraction). The library name is **`ConverseProjection i`** (`ConverseProjection.lean`).

Definition (`ConverseProjection`). *Under the hypotheses above, **`ConverseProjection i`** is the **`ContinuousLatticeProjection`** with inclusion i and retraction **`ConverseRetraction.ConverseRetrac i`**.

Proof. **`ConverseRetraction.converseRetr_incl`** and **`ConverseRetraction.incl_converseRetr_le`** supply **`retr_incl`** and **`incl_retr_le`**; Scott continuity comes from **`ConverseRetraction.`** □

`ConverseProjection.lean`

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection
public import DomainTheory.ContinuousLattice.FunctionSpaces.ConverseRetraction

@[expose] public section

universe u v

namespace DomainTheory.ContinuousLattice

open Set

variable {D : Type u} {D' : Type v}
variable [CompleteLattice D] [CompleteLattice D']

noncomputable def ConverseProjection (i : D → D')
    (hi : ∀ S : Set D, i (sSup S) = sSup (i '' S)) (hinj : Function.Injective i)
    (hwb : ∀ {x y : D}, x ≪ y → i x ≪ i y) (hD : ContinuousLattice D) :
    ContinuousLatticeProjection D D' where
  incl := ⟨i, PreservesDirectedSup.continuous_of (fun _ _ _ => hi _)⟩
  retr := ⟨ConverseRetraction.ConverseRetraction i, PreservesDirectedSup.continuous_of
    (ConverseRetraction.preservesDirectedSup i hi hwb hD)⟩
  retr_incl := fun d => ConverseRetraction.converseRetr_incl i hi hinj d
  incl_retr_le := fun x' => ConverseRetraction.incl_converseRetr_le i hi x'

end DomainTheory.ContinuousLattice
```

1.3.14 Proof of 2.10 ✓

Proof of 2.10

Let D' be a continuous lattice and let $D \subseteq D'$ be a subspace which is a retract. We have for a suitable $j : D' \to D$,

$$D = \{x \in D' : j(x) = x\},$$

where of course j is continuous.

First a note of warning: though D is a subspace it is not a sublattice; that is, the partial ordering on D is the restriction of that of D', but the lubs of D are not those of D'. We shall have to distinguish operations by adding a prime ($'$) for those of D'.

Suppose $x, y \in D$. Let $z' = x \sqcup y \in D'$ (join taken in D') and define $z = j(z') \in D$. Now $x \sqsubseteq z'$ and $y \sqsubseteq z'$, and j is monotonic, so $x \sqsubseteq z$ and $y \sqsubseteq z$. Suppose $x \sqsubseteq w$ and $y \sqsubseteq w$ with $w \in D$. Then in D' we have $x \sqcup y \sqsubseteq w$; so $z \sqsubseteq w$ also. Hence we have shown that $z = x \sqcup y$ in D.

To show that D has a least element $\perp$ (which may be larger than the $\perp' \in D'$), we need a well-known lemma about monotonic functions: Every monotonic function on a complete lattice into itself has a least fixed point. (Cf. Birkhoff (1970), p. 115.) In our case j is monotonic and

$$\perp = \sqcap \{x \in D' : j(x) \sqsubseteq x\}$$

is the desired element in D.

Thus D is at least a semilattice with $\perp$ and $\sqcup$. To show that D is a lattice we need to show that every directed $S \subseteq D$ has a lub in D. Now we know ($S' = S$, join taken in the ambient lattice D'):

$$\bigsqcup S' \in D',$$

and this is a limit of a monotone net. So by 2.1, and the continuity of j:

$$j(\bigsqcup S') = \bigsqcup \{j(x) : x \in S\} \quad = \bigsqcup S$$

in D. In this way we now know that D is a complete lattice. We must still show that D is continuous.

Suppose $y \in D$. In D' we can write:

$$y = \bigsqcup \{x \in D' : x \ll y'\}$$

and this is the limit of a monotone net. Thus

$$j(y) = y = \bigsqcup j(x) : x \ll y, x \in D',$$

where the lub is taken in D. Note that the sets

$$U = \{z \in D : x \ll z\}$$

are open in D for each $x \in D'$. Note too that if $z \in U$, then $x \sqsubseteq z$ and so $j(x) \sqsubseteq j(z) = z$. This means that

$$j(x) \sqsubseteq \sqcap U$$

in D. We can then write in D:

$$y = \bigsqcup \{\sqcap U : y \in U\}$$

where U ranges over the open subsets of D, and so the lattice is continuous by 2.4. Inasmuch as the open sets U just used were open in the subspace topology, it follows by the remark after 2.4 that the subspace and the lattice-induced topologies coincide. □

1.3.15 Proof of 2.11 ✓

Proof of 2.11: Let D be a continuous lattice with its induced topology, and let $X \subseteq Y$ be two T_0-spaces in the subspace relation. Suppose

$$f : X \to D$$

is continuous. Define

$$\bar{f} : Y \to D$$

by the formula:

$$\bar{f}(y) = \bigsqcup\{\sqcap\{f(x) : x \in X \cap U\} : y \in U\},$$

where U ranges over the open subsets of Y. We need to show that $\bar{f}$ extends f and that it is continuous.

First, the continuity: Suppose that $d \in D$ and $d \ll \bar{f}(y)$; that is, $\bar{f}(y)$ belongs to a typical basic open subset of D. Since D is continuous, we can also find

$$d \ll d' \ll \bar{f}(y)$$

with $d' \in D$. From the definition of $\bar{f}$ it follows that

$$d' \sqsubseteq \sqcap\{f(x) : x \in X \cap U\}$$

for some open $U \subseteq Y$ with $y \in U$. Thus

$$d' \sqsubseteq \bar{f}(y')$$

for all $y' \in U$ by virtue of the definition of $\bar{f}$. Since $d \ll d'$, we have also

$$d \ll \bar{f}(y')$$

for all $y' \in U$; in other words, the inverse image of the open subset of D determined by d under $\bar{f}$ is indeed open in Y, and $\bar{f}$ is thus continuous.

Next, the extension property: Note that the relationship

$$\bar{f}(x') \sqsubseteq f(x')$$

for all $x' \in X$ comes directly out of the definition of $\bar{f}$. For the converse, suppose $d \ll f(x')$ where $d \in D$. By assumption $f : X \to D$ is continuous, so

$$d \ll f(x'')$$

for all $x'' \in X \cap U$ where U is a suitable open subset of Y with $x' \in U$. In particular we have:

$$d \sqsubseteq \sqcap\{f(x'') : x'' \in X \cap U\},$$

and so $d \sqsubseteq \bar{f}(x')$. Since $d \ll f(x')$ always implies $d \sqsubseteq \bar{f}(x')$, we see that $f(x') \sqsubseteq \bar{f}(x')$ follows by the continuity of D, and the proof is complete. □

scottExtend_aux_nonempty.lean

```
module
public import Mathlib.Order.ConditionallyCompleteLattice.Basic
public import Mathlib.Topology.Defs.Basic

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

variable {D : Type*} [CompleteLattice D]

section InjectiveExtension

variable {X Y : Type*} [TopologicalSpace X] [TopologicalSpace Y] {E : Type*} [
    CompleteLattice E]

omit [TopologicalSpace X] in
theorem scottExtend_aux_nonempty (e : X → Y) (f : X → E) (y : Y) :
    {d | ∃ V : Set Y, IsOpen V ∧ y ∈ V ∧ d = sInf (f '' (e ^-1' V))}.Nonempty :=
  ⟨_, Set.univ, isOpen_univ, Set.mem_univ y, rfl⟩

end InjectiveExtension
end DomainTheory.ContinuousLattice
```

scottTopology_prop.lean

```
module

public import DomainTheory.ContinuousLattice.Specialization.scottTopologicalSpace
public import DomainTheory.ContinuousLattice.WayBelow.ScottOpen
public import Mathlib.Topology.Defs.Basic
public import Mathlib.Data.Set.Basic

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

variable {D : Type*} [CompleteLattice D]

theorem scottTopology_prop :
    (scottTopologicalSpace : TopologicalSpace Prop) = sierpinskiSpace := by
  apply le_antisymm
  ·
    show (scottTopologicalSpace : TopologicalSpace Prop) ≤ TopologicalSpace.
    generateFrom {{True}}
    apply le_generateFrom
    intro s hs
    rw [Set.mem_singleton_iff] at hs
```

```
    subst hs
    rw [ScottOpen.isOpen_iff]
    refine ⟨?_, ?_⟩
    · intro a b hab ha
      rw [Set.mem_singleton_iff] at ha ⊢
      exact le_antisymm le_top (ha ▸ hab)
    · intro S _ _ hmem
      rw [Set.mem_singleton_iff] at hmem
      have hex : ∃ p ∈ S, p := by rw [← sSup_Prop_eq, hmem]; trivial
      obtain ⟨p, hpS, hp⟩ := hex
      exact ⟨p, hpS, by rw [Set.mem_singleton_iff]; exact eq_true hp⟩
  .
    rw [TopologicalSpace.le_def]
    intro U hU
    rw [ScottOpen.isOpen_iff] at hU
    by_cases hT : True ∈ U
    · by_cases hF : False ∈ U
      · have hUuniv : U = Set.univ := by
          ext p
          simp only [Set.mem_univ, iff_true]
          by_cases hp : p
          · rwa [eq_true hp]
          · rwa [eq_false hp]
        rw [hUuniv]; exact isOpen_univ
      · have hUtrue : U = {True} := by
          ext p
          rw [Set.mem_singleton_iff]
          constructor
          · intro hpU
            by_cases hp : p
            · exact eq_true hp
            · exact absurd (eq_false hp ▸ hpU) hF
          · intro hp; rw [hp]; exact hT
        rw [hUtrue]; exact isOpen_singleton_true
    · have hUempty : U = ∅ := by
        ext p
        simp only [Set.mem_empty_iff_false, iff_false]
        intro hpU
        exact hT (hU.1 le_top hpU)
      rw [hUempty]; exact isOpen_empty

end DomainTheory.ContinuousLattice
```

scottExtend_aux_directed.lean

```
module
public import Mathlib.Order.ConditionallyCompleteLattice.Basic
public import Mathlib.Topology.Defs.Basic

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set
```

```
variable {D : Type*} [CompleteLattice D]

section InjectiveExtension

variable {X Y : Type*} [TopologicalSpace X] [TopologicalSpace Y] {E : Type*} [
    CompleteLattice E]

omit [TopologicalSpace X] in

theorem scottExtend_aux_directed (e : X → Y) (f : X → E) (y : Y) :
    DirectedOn (· ≤ ·) {d | ∃ V : Set Y, IsOpen V ∧ y ∈ V ∧ d = sInf (f '' (e ^-1' V))}
     := by
  rintro _ ⟨V₁, hV₁o, hyV₁, rfl⟩ _ ⟨V₂, hV₂o, hyV₂, rfl⟩
  refine ⟨sInf (f '' (e ^-1' (V₁ ∩ V₂))), ⟨V₁ ∩ V₂, hV₁o.inter hV₂o, ⟨hyV₁, hyV₂⟩, rfl⟩, ?
    _, ?_⟩
  · exact sInf_le_sInf (Set.image_mono (Set.preimage_mono Set.inter_subset_left))
  · exact sInf_le_sInf (Set.image_mono (Set.preimage_mono Set.inter_subset_right))

end InjectiveExtension
end DomainTheory.ContinuousLattice
```

piWayBelow.lean

```
module

public import DomainTheory.ContinuousLattice.ScottMaps.PreservesDirectedSup
public import DomainTheory.ContinuousLattice.ScottMaps.scottOpen_preimage
public import Mathlib.Data.Finset.Lattice.Basic
public import Mathlib.Data.Finset.Insert
public import Mathlib.Data.Finset.Defs
public import DomainTheory.ContinuousLattice.WayBelow.WayBelow
public import Mathlib.Topology.Defs.Basic

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

namespace piWayBelow

variable {D : Type*} [CompleteLattice D]

theorem update_preservesDirectedSup {ι : Type*} [DecidableEq ι] {E : ι → Type*}
    [∀ i, CompleteLattice (E i)] (z : ∀ i, E i) (i : ι) :
    PreservesDirectedSup (fun v : E i => Function.update z i v) := by
  intro T hTne _
  show Function.update z i (sSup T) = sSup ((fun v : E i => Function.update z i v) ''
    T)
  funext j
  rw [sSup_apply_eq_sSup_image, Set.image_image]
  rcases eq_or_ne j i with hji | hji
  · rw [hji, Function.update_self]
    have h : (fun v : E i => Function.eval i (Function.update z i v)) = id := by
      funext v; simp [Function.eval, Function.update_self]
```

```
    rw [h, Set.image_id]
  · rw [Function.update_of_ne hji]
    have h : (fun v : E i => Function.eval j (Function.update z i v)) = fun _ => z j
    := by
      funext v; simp [Function.eval, Function.update_of_ne hji]
    rw [h, hTne.image_const, sSup_singleton]

theorem wayBelow_proj {ι : Type*} {E : ι → Type*} [∀ i, CompleteLattice (E i)]
    {a z : ∀ i, E i} (h : a ≪ z) (i : ι) : a i ≪ z i := by
  classical
  obtain ⟨W, hW, hzW, hWsub⟩ := h
  refine ⟨(fun v : E i => Function.update z i v) ^-1' W, ?_, ?_, ?_⟩
  · exact scottOpen_preimage (update_preservesDirectedSup z i) hW
  · show Function.update z i (z i) ∈ W
    rw [Function.update_eq_self]; exact hzW
  · intro v hv
    have hav : a ≤ Function.update z i v := Set.mem_Ici.1 (hWsub hv)
    have := hav i
    rwa [Function.update_self] at this

theorem wayBelow_finite_support {ι : Type*} {E : ι → Type*} [∀ i, CompleteLattice (E i)
    ]
    {a z : ∀ i, E i} (h : a ≪ z) : ∃ F : Finset ι, ∀ j ∈ F, a j = ⊥ := by
  classical
  set Z : Finset ι → (∀ j, E j) := fun F j => if j ∈ F then z j else ⊥ with hZ
  set 𝒵 : Set (∀ j, E j) := Set.range Z with h𝒵
  have hmono : Monotone Z := by
    intro F G hFG
    rw [Pi.le_def]; intro j
    simp only [hZ]
    by_cases hjF : j ∈ F
    · rw [ite_eq_left hjF, ite_eq_left (hFG hjF)]
    · rw [ite_eq_right hjF]; exact bot_le
  have h𝒵ne : 𝒵.Nonempty := ⟨Z ∅, ∅, rfl⟩
  have h𝒵dir : DirectedOn (· ≤ ·) 𝒵 := by
    rintro _ ⟨F, rfl⟩ _ ⟨G, rfl⟩
    exact ⟨Z (F ∪ G), ⟨F ∪ G, rfl⟩, hmono Finset.subset_union_left,
      hmono Finset.subset_union_right⟩
  have hsup : sSup 𝒵 = z := by
    apply le_antisymm
    · apply sSup_le
      rintro _ ⟨F, rfl⟩
      rw [Pi.le_def]; intro j
      simp only [hZ]
      by_cases hjF : j ∈ F
      · rw [ite_eq_left hjF]
      · rw [ite_eq_right hjF]; exact bot_le
    · rw [Pi.le_def]; intro j
      rw [sSup_apply_eq_sSup_image]
      refine le_sSup ⟨Z {j}, ⟨{j}, rfl⟩, ?_⟩
      simp [hZ, Function.eval]
  rw [← hsup] at h
  obtain ⟨d, hd𝒵, had⟩ := (WayBelow.sSup_iff h𝒵ne h𝒵dir).1 h
  obtain ⟨F, rfl⟩ := hd𝒵
  refine ⟨F, fun j hjF => ?_⟩
  have hj := had.le j
```

```
  simp only [hZ, ite_eq_right hjF] at hj
  exact le_bot_iff.1 hj

end piWayBelow

end DomainTheory.ContinuousLattice
```

continuous_eq_sSup_openInfs.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

variable {D : Type*} [CompleteLattice D]

section InjectiveExtension

variable {X Y : Type*} [TopologicalSpace X] [TopologicalSpace Y] {E : Type*} [
    CompleteLattice E]

theorem continuous_eq_sSup_openInfs (hE : ContinuousLattice E) {f' : Y → E}
    (hf' : @Continuous Y E _ scottTopologicalSpace f') (y : Y) :
    f' y = sSup {d | ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ d = sInf (f' '' U)} := by
  apply le_antisymm
  · rw [← hE.sSup_wayBelow (f' y)]
    refine sSup_le fun a ha => ?_
    have hWopen : @IsOpen E scottTopologicalSpace {z : E | a ≪ z} :=
      ScottOpen.isOpen_iff.mpr (ScottOpen.wayBelow a)
    have hpre : IsOpen (f' ^-1' {z : E | a ≪ z}) := continuous_def.mp hf' _ hWopen
    have hyU : y ∈ f' ^-1' {z : E | a ≪ z} := ha
    refine le_trans ?_ (le_sSup ⟨f' ^-1' {z : E | a ≪ z}, hpre, hyU, rfl⟩)
    refine le_sInf ?_
    rintro w ⟨z, hzU, rfl⟩
    exact (hzU : a ≪ f' z).le
  · refine sSup_le ?_
    rintro d ⟨U, _hUo, hyU, rfl⟩
    exact sInf_le ⟨y, hyU, rfl⟩

end InjectiveExtension
end DomainTheory.ContinuousLattice
```

scottExtend.lean

```
module
public import Mathlib.Order.ConditionallyCompleteLattice.Basic
public import Mathlib.Topology.Defs.Basic

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

open Topology Set

variable {D : Type*} [CompleteLattice D]

section InjectiveExtension

variable {X Y : Type*} [TopologicalSpace X] [TopologicalSpace Y] {E : Type*} [
    CompleteLattice E]

def scottExtend (e : X → Y) (f : X → E) (y : Y) : E :=
  sSup {d | ∃ V : Set Y, IsOpen V ∧ y ∈ V ∧ d = sInf (f '' (e ^-1' V))}

end InjectiveExtension

end DomainTheory.ContinuousLattice
```

scottExtend_continuous.lean

```
module
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice

public import DomainTheory.ContinuousLattice.Constructions.scottExtend
import DomainTheory.ContinuousLattice.Constructions.scottExtend_aux_directed
import DomainTheory.ContinuousLattice.Constructions.scottExtend_aux_nonempty

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

variable {D : Type*} [CompleteLattice D]

section InjectiveExtension

variable {X Y : Type*} [TopologicalSpace X] [TopologicalSpace Y] {E : Type*} [
    CompleteLattice E]

omit [TopologicalSpace X] in

theorem scottExtend_continuous (hE : ContinuousLattice E) (e : X → Y) (f : X → E) :
    @Continuous Y E _ scottTopologicalSpace (scottExtend e f) := by
  let : TopologicalSpace E := scottTopologicalSpace
  rw [continuous_def]
  intro U hU
  rw [ScottOpen.isOpen_iff] at hU
  rw [isOpen_iff_forall_mem_open]
  intro y₀ hy₀
  have hgy₀U : scottExtend e f y₀ ∈ U := hy₀
  obtain ⟨a, haz, hasub⟩ := exists_wayBelow_subset hE hU hgy₀U
  obtain ⟨d, hd, had⟩ := (WayBelow.sSup_iff (scottExtend_aux_nonempty e f y₀)
    (scottExtend_aux_directed e f y₀)).1 haz
  obtain ⟨V, hVo, hy₀V, rfl⟩ := hd
```

```
  refine ⟨V, ?_, hVo, hy₀V⟩
  intro y' hy'V
  show scottExtend e f y' ∈ U
  refine hasub ?_
  show a ≪ scottExtend e f y'
  exact had.trans_le (le_sSup ⟨V, hVo, hy'V, rfl⟩)

end InjectiveExtension
end DomainTheory.ContinuousLattice
```

scottExtend_eq_of_continuous.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.Constructions.scottExtend

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

variable {D : Type*} [CompleteLattice D]

section InjectiveExtension

variable {X Y : Type*} [TopologicalSpace X] [TopologicalSpace Y] {E : Type*} [
    CompleteLattice E]

theorem scottExtend_eq_of_continuous (hE : ContinuousLattice E) (e : X → Y)
    (he : IsEmbedding e) (f : X → E) (hf : @Continuous X E _ scottTopologicalSpace f)
    (x₀ : X) :
    scottExtend e f (e x₀) = f x₀ := by
  apply le_antisymm
  · refine sSup_le ?_
    rintro d ⟨V, hVo, hex₀V, rfl⟩
    exact sInf_le ⟨x₀, hex₀V, rfl⟩
  · rw [← hE.sSup_wayBelow (f x₀)]
    refine sSup_le fun a ha => ?_
    have hWopen : @IsOpen E scottTopologicalSpace {z : E | a ≪ z} :=
      ScottOpen.isOpen_iff.mpr (ScottOpen.wayBelow a)
    have hpre : IsOpen (f ^-1' {z : E | a ≪ z}) := continuous_def.mp hf _ hWopen
    rw [he.isInducing.isOpen_iff] at hpre
    obtain ⟨V, hVo, hVeq⟩ := hpre
    have hx₀V : x₀ ∈ e ^-1' V := by rw [hVeq]; exact ha
    refine le_trans ?_ (le_sSup ⟨V, hVo, hx₀V, rfl⟩)
    refine le_sInf ?_
    rintro w ⟨x, hxV, rfl⟩
    have hxW : x ∈ f ^-1' {z : E | a ≪ z} := by rw [← hVeq]; exact hxV
    exact (hxW : a ≪ f x).le

end InjectiveExtension
end DomainTheory.ContinuousLattice
```

scottTopology.lean

```
module

public import DomainTheory.ContinuousLattice.Specialization.scottTopologicalSpace
public import DomainTheory.ContinuousLattice.Constructions.scottTopology_prop
public import DomainTheory.ContinuousLattice.Constructions.proposition_2_9
public import DomainTheory.ContinuousLattice.Constructions.proposition_2_8
public import Mathlib.Data.Set.Basic

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

variable {D : Type*} [CompleteLattice D]

namespace scottTopology

theorem sierpinskiPower (ι : Type*) :
    (scottTopologicalSpace : TopologicalSpace (ι → Prop)) =
      (inferInstance : TopologicalSpace (ι → Prop)) := by
  rw [(proposition_2_9 (fun _ => Prop) (fun _ => proposition_2_8)).2]
  show (@Pi.topologicalSpace ι (fun _ => Prop) (fun _ => scottTopologicalSpace)) =
    @Pi.topologicalSpace ι (fun _ => Prop) (fun _ => sierpinskiSpace)
  congr 1
  funext _
  exact scottTopology_prop

end scottTopology

end DomainTheory.ContinuousLattice
```

scottExtend_maximal.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.Constructions.scottExtend
import DomainTheory.ContinuousLattice.Constructions.continuous_eq_sSup_openInfs

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

variable {D : Type*} [CompleteLattice D]

section InjectiveExtension

variable {X Y : Type*} [TopologicalSpace X] [TopologicalSpace Y] {E : Type*} [
    CompleteLattice E]

omit [TopologicalSpace X] in
```

```
theorem scottExtend_maximal (hE : ContinuousLattice E) (e : X → Y) {f : X → E} {f' :
    Y → E}
    (hf' : @Continuous Y E _ scottTopologicalSpace f') (h_ext : ∀ x, f' (e x) = f x) (y
     : Y) :
    f' y ≤ scottExtend e f y := by
  rw [continuous_eq_sSup_openInfs hE hf' y]
  refine sSup_le ?_
  rintro d ⟨U, hUo, hyU, rfl⟩
  refine le_trans ?_ (le_sSup ⟨U, hUo, hyU, rfl⟩)
  refine le_sInf ?_
  rintro w ⟨x, hxU, rfl⟩
  rw [← h_ext x]
  exact sInf_le ⟨e x, hxU, rfl⟩

end InjectiveExtension
end DomainTheory.ContinuousLattice
```

scottExtend_maximal_le.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.Constructions.scottExtend
import DomainTheory.ContinuousLattice.Constructions.continuous_eq_sSup_openInfs

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

variable {D : Type*} [CompleteLattice D]

section InjectiveExtension

variable {X Y : Type*} [TopologicalSpace X] [TopologicalSpace Y] {E : Type*} [
    CompleteLattice E]

omit [TopologicalSpace X] in

theorem scottExtend_maximal_le (hE : ContinuousLattice E) (e : X → Y) {g : X → E} {f'
     : Y → E}
    (hf' : @Continuous Y E _ scottTopologicalSpace f') (h_le : ∀ x, f' (e x) ≤ g x) (y
     : Y) :
    f' y ≤ scottExtend e g y := by
  rw [continuous_eq_sSup_openInfs hE hf' y]
  refine sSup_le ?_
  rintro d ⟨U, hUo, hyU, rfl⟩
  refine le_trans ?_ (le_sSup ⟨U, hUo, hyU, rfl⟩)
  refine le_sInf ?_
  rintro w ⟨x, hxU, rfl⟩
  exact le_trans (sInf_le ⟨e x, hxU, rfl⟩) (h_le x)

end InjectiveExtension
```

```
end DomainTheory.ContinuousLattice
```

1.4 Function spaces ✓

We recall the standard definition and introduce our notation for function spaces.

Figure 11: Function spaces ✓.

1.4.1 Induced pi topology on $C(X, Y)$ ✓

Library packaging for the product (pointwise) topology on continuous maps between T_0-spaces, before Definition 3.1 specializes the eval subbase on **`C(X, Y)`**.

For T_0-spaces X and Y, Definition 3.1 identifies $[X \to Y]$ with **`C(X, Y)`** and equips it with the *product topology* (topology of pointwise convergence). Mathlib already carries the product topology on Y^X; restricting to continuous maps gives the subspace topology induced along the inclusion **`C(X, Y)`** $\hookrightarrow$ **`X → Y`**.

Definition (`continuousMapInducedPiTopology`). **`continuousMapInducedPiTopology X Y`** is that induced topology on **`C(X, Y)`**: the pi (product) topology on Y^X, pulled back along `(f : C(X, Y)) ↦ (f : X → Y)`.

This definition is the generic T_0 packaging used before lattices enter the story. On **`ScottFunctionTopology.lean`**, **`scottFunctionTopology X Y`** is built from the eval subbase of Definition 3.1; **`scottFunctionTopology.eq_induced_pi`** proves **`scottFunctionTopology X Y = continuousMapInducedPiTopology X Y`**, so Scott's subbase description and the product topology coincide on **`C(X, Y)`**.

`continuousMapInducedPiTopology.lean`

```
module
public import Mathlib.Topology.Constructions

@[expose] public section

namespace DomainTheory.ContinuousLattice
```

```
open Set Topology TopologicalSpace

variable {X Y D D' D'' D₀ D₀' D₁ D₁' : Type*}

variable [TopologicalSpace X] [TopologicalSpace Y]

variable [CompleteLattice D] [CompleteLattice D'] [CompleteLattice D'']

variable [CompleteLattice D₀] [CompleteLattice D₀'] [CompleteLattice D₁] [
    CompleteLattice D₁']

@[reducible] noncomputable def continuousMapInducedPiTopology (X Y : Type*)
    [TopologicalSpace X] [TopologicalSpace Y] : TopologicalSpace C(X, Y) :=
  TopologicalSpace.induced (fun f : C(X, Y) => (f : X → Y))
    (@Pi.topologicalSpace X (fun _ => Y) (fun _ => inferInstance))

end DomainTheory.ContinuousLattice
```

1.4.2 Definition 3.1: Function space ✓

3.1 Definition. For T_0-spaces X and Y we let $[X \to Y]$ be the *space of all continuous functions* $f : X \to Y$ endowed with the product topology, sometimes called the topology of pointwise convergence. This topology has as a subbase sets of the form:

$$\{f : f(x) \in U\}$$

where $x \in X$ and $U \subseteq Y$ is open.

The pointwise aspect of the topology is immediately apparent in the partial ordering.

For T_0-spaces X and Y, the library identifies $[X \to Y]$ with **`C(X, Y).scottFunctionTopology.evalSubbasi`**
`X Y` is the family of subbasic sets $\{ f \in C(X,Y) \mid f(x) \in U \}$ with $x \in X$ and $U \subseteq Y$ open. **`scottFunctionTopology X Y`** is the topology generated from that subbase.

The lemmas in namespace **`scottFunctionTopology`** justify this packaging:

Lemma (`subbasis_isOpen`). For open $U \subseteq Y$ and $x \in X$, the subbasic set $\{ f \mid f(x) \in U \}$ is open in `scottFunctionTopology X Y`.

Lemma (`subbasis_isOpen_scott`). When D and D' are complete lattices and $U \subseteq D'$ is open in **`scottTopologicalSpace`**, the same subbasic set $\{ f \in C(D, D') \mid f(x) \in U \}$ is open in **`scottFunctionTopology D D'`** with both domain and codomain carrying the Scott topology (used in Corollary 3.4).

Theorem (`eq_induced_pi`). `scottFunctionTopology X Y` is the product topology on Y^X (pointwise convergence), induced along the inclusion of continuous maps into all maps $X \to Y$.

Lemma (`specializationPreorder_generateOpen`). If $f(x) \sqsubseteq g(x)$ for every $x \in X$, and $V \subseteq C(X,Y)$ is open in the topology generated from the eval subbase with $f \in V$, then $g \in V$.

Theorem (`specializationPreorder`). With the specialization preorder from `scottFunctionTopology X Y`, $f \sqsubseteq g$ iff $f(x) \sqsubseteq g(x)$ for all $x \in X$ — the pointwise specialization order on the function space (the content of Proposition 3.2, proved there as `proposition_3_2` via this lemma).

ScottFunctionTopology.lean

```
module
```

```
public import DomainTheory.ContinuousLattice.Specialization.SpecializationPreorder
public import DomainTheory.ContinuousLattice.Specialization.scottTopologicalSpace
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    continuousMapInducedPiTopology
public import Mathlib.Topology.ContinuousMap.Basic

@[expose] public section

universe u v

namespace DomainTheory.ContinuousLattice

open Set Topology TopologicalSpace

variable {X Y D D' D'' D₀ D₀' D₁ D₁' : Type*}

abbrev ScottFunctionSpace (X Y : Type*) [TopologicalSpace X] [TopologicalSpace Y] :=
  C(X, Y)

abbrev ScottC (D D' : Type*) [CompleteLattice D] [CompleteLattice D'] :=
  @ContinuousMap D D' scottTopologicalSpace scottTopologicalSpace

def scottFunctionTopology.evalSubbasis (X Y : Type*) [TopologicalSpace X] [
    TopologicalSpace Y] :
    Set (Set (C(X, Y))) :=
  { W | ∃ (x : X) (U : Set Y), IsOpen U ∧ W = {f : C(X, Y) | f x ∈ U} }

@[reducible] noncomputable def scottFunctionTopology (X Y : Type*) [TopologicalSpace X
    ]
    [TopologicalSpace Y] : TopologicalSpace (C(X, Y)) :=
  generateFrom (scottFunctionTopology.evalSubbasis X Y)

namespace scottFunctionTopology

section

variable [TopologicalSpace X] [TopologicalSpace Y]

theorem subbasis_isOpen {x : X} {U : Set Y} (hU : IsOpen U) :
    @IsOpen (C(X, Y)) (scottFunctionTopology X Y) {f : C(X, Y) | f x ∈ U} :=
  isOpen_generateFrom_of_mem (s := {f : C(X, Y) | f x ∈ U}) ⟨x, U, hU, rfl⟩

variable {D D' : Type*} [CompleteLattice D] [CompleteLattice D']

theorem subbasis_isOpen_scott {x : D} {U : Set D'} (hU : @IsOpen D'
    scottTopologicalSpace U) :
    letI : TopologicalSpace D := scottTopologicalSpace
    letI : TopologicalSpace D' := scottTopologicalSpace
    @IsOpen (C(D, D')) (scottFunctionTopology D D') {f : C(D, D') | f x ∈ U} := by
  let : TopologicalSpace D := scottTopologicalSpace
  let : TopologicalSpace D' := scottTopologicalSpace
  exact subbasis_isOpen (x := x) hU

theorem eq_induced_pi (X Y : Type*) [TopologicalSpace X] [TopologicalSpace Y] :
    scottFunctionTopology X Y = continuousMapInducedPiTopology X Y := by
  apply le_antisymm
```

```
  · let : TopologicalSpace C(X, Y) := scottFunctionTopology X Y
    change scottFunctionTopology X Y ≤ continuousMapInducedPiTopology X Y
    rw [← continuous_iff_le_induced]
    exact continuous_pi fun x =>
      continuous_def.2 fun U hU =>
        subbasis_isOpen (X := X) (Y := Y) (x := x) hU
  · apply le_generateFrom_iff_subset_isOpen.2
    rintro W ⟨x, U, hU, rfl⟩
    change @IsOpen C(X, Y)
      (TopologicalSpace.induced (fun f : C(X, Y) => (f : X → Y))
        (@Pi.topologicalSpace X (fun _ => Y) (fun _ => inferInstance)))
      {f : C(X, Y) | f x ∈ U}
    rw [isOpen_induced_iff]
    exact ⟨{g : X → Y | g x ∈ U}, (@continuous_apply X (fun _ => Y)
      (fun _ => inferInstance) x).isOpen_preimage U hU, rfl⟩

theorem specializationPreorder_generateOpen (f g : C(X, Y)) (hfg : ∀ x,
    SpecializationPreorder (f x) (g x))
    {V : Set (C(X, Y))} (hV : GenerateOpen (evalSubbasis X Y) V) (hf : f ∈ V) :
    g ∈ V :=
  match hV with
  | .basic W hW => by
    obtain ⟨x, U, hU, rfl⟩ := hW
    exact hfg x U hU hf
  | .univ => hf
  | .inter s t hs ht => by
    rcases hf with ⟨hfs, hft⟩
    exact Set.mem_inter (specializationPreorder_generateOpen f g hfg hs hfs)
      (specializationPreorder_generateOpen f g hfg ht hft)
  | .sUnion S hS => by
    obtain ⟨W, hWS, hfW⟩ := Set.mem_sUnion.mp hf
    exact Set.mem_sUnion.mpr ⟨W, hWS, specializationPreorder_generateOpen f g hfg (hS W
     hWS) hfW⟩

theorem specializationPreorder {f g : C(X, Y)} :
    letI := scottFunctionTopology X Y
    SpecializationPreorder f g ↔ ∀ x, SpecializationPreorder (f x) (g x) := by
  let : TopologicalSpace (C(X, Y)) := scottFunctionTopology X Y
  constructor
  · intro hfg x U hU hfU
    exact hfg {h | h x ∈ U} (subbasis_isOpen (X := X) (Y := Y) hU) hfU
  · intro hfg U hU hfU
    exact specializationPreorder_generateOpen f g hfg hU hfU

end

end scottFunctionTopology

end DomainTheory.ContinuousLattice
```

1.4.3 Elements of $[D \to D']$ ✓

For continuous lattices D and D', Scott's §3 notation $[D \to D']$ is the set of maps $f : D \to D'$ that are continuous for the Scott topologies (equivalently, Scott-continuous in the sense of §2). The li-

brary names that carrier **ScottMap D D'**: a subtype of $D \to D'$ carrying a proof of continuity for **scottTopologicalSpace** on domain and codomain.

ScottMap.lean is **self-contained**: it does not import or mention **stepFun** or **stepMap**. Step functions for Theorem 3.3 are in Step function (pointwise) and Step map $\overrightarrow{e}[e, e']$. Scott's projection space J_D (**ProjectionSpace**, Definition 3.11) and sup-closure (Proposition 3.12) are in Definition 3.11: Projection space. Retractions between map spaces (**ScottMap.retraction**) are in Retractions and extensions. **FunctionSpace.retraction** and **FunctionSpace.projection** are in Function-space retraction and projection; Proposition 3.7 is the paper statement. Projections on map spaces and **ScottMap.conMinContinuousLatticeProjection** are in Definition 3.6; **con** / **min** appear in Proposition 3.13.

Namespace **ScottMap** collects the library tools on that carrier:

Instance (CoeFun). A Scott map coerces to its underlying function $D \to D'$.

Lemma (ext). Two Scott maps agree if they agree at every argument.

Definition (const). The constant Scott map at $c \in D'$; **const_apply** reads off c at each x.

Definition (con). Scott's $\mathrm{con} : D \to [D \to D]$: at x the constant endo-map $\mathrm{con}(x) = \mathrm{const}\, x$.

Definition (min). Scott's $\min : [D \to D] \to D$: **min f = f(⊥)** on the coercion.

Definition (toOrderHom). **OrderHom** view of $f \in [D \to D]$ for least-fixed-point arguments.

Definition (fix). Scott's fixed-point operator on endo-maps $[D \to D]$ (least fixpoint via **toOrderHom**).

Lemma (fix_le). **fix f ≤ x** from any prefix point **f x ≤ x**.

Lemma (fix_eq). **f (fix f) = fix f**.

Lemma (fix_mono). **fix** is monotone in the Scott map argument.

Lemma (fix_unique). Any least prefix point agrees with **fix f**.

Lemma (fix_preservesDirectedSup). **fix : [D \to D] \to D** preserves directed suprema.

Definition (fixMap). The Scott-continuous **[D \to D] \to D** map packaging **fix**; **fixMap_apply**.

Definition (le), lt. Pointwise order: $f \le g$ when $f(x) \le g(x)$ for all x.

Lemma (le_refl'). Reflexivity of the pointwise order.

Lemma (le_trans'). Transitivity.

Lemma (le_antisymm'). Antisymmetry.

Lemma (lt_iff_le_not_ge'). Strict order as "$\le$ and not $\ge$"; feeds **instPartialOrder**.

Instance (instPartialOrder). Pointwise order on **ScottMap D D'**.

Lemma (le_def). **f ≤ g** iff pointwise inequality on the coercion.

Lemma (preservesDirectedSup_coe). For nonempty directed $S \subseteq D$, $f(\bigsqcup S) = \bigsqcup f[S]$ (Proposition 2.5 on the coercion).

Lemma (monotone). The underlying function is monotone.

Lemma (pointwise_sSup_preservesDirectedSup). For $\mathcal{F} \subseteq [D \to D']$, the map $x \mapsto \bigsqcup\{f(x) \mid f \in \mathcal{F}\}$ preserves directed suprema.

Lemma (sSupMaps_continuous). That pointwise sup is Scott-continuous.

Definition (sSupMaps). The Scott map whose value at x is that pointwise sup; **sSupMaps_apply** is definitional.

Instance (instSupSet). **sSup F** is **sSupMaps F**.

Lemma (sSup_apply). **(sSup F) x = \bigsqcup \{ f(x) \mid f \in F \}**.

Theorem (isLUB_sSup). **sSup F** is a least upper bound of F in the pointwise order.

Definition (`instCompleteLattice`). `ScottMap D D'` is a complete lattice via `completeLatticeOfSup` (sup-only here; meets are inherited from the complete lattice structure on D' at each point).

Lemma (`preservesDirectedSup_comp`). If $f : D' \to D''$ and $g : D \to D'$ preserve directed suprema, so does $f \circ g$.

Definition (`comp`). Composition of Scott maps; `comp_apply` is `(f \circ g)(x) = f(g(x))`.

Lemma (`continuous`). The subtype proof: Scott continuity of the coercion.

Definition (`idMap`). The identity Scott endo-map; `idMap_apply` is reflexivity at x.

Lemma (`bot_apply`). `(⊥) x =` $\bot$ in D'.

Lemma (`sup_apply`). `(f \sqcup g)(x) = f(x) \sqcup g(x)`.

Lemma (`sInf_image_le_of_mem`). For Scott-open $U \ni y$, $\sqcap f'[U] \sqsubseteq f'(y)$ on the coercion $f' : D \to D'$.

Theorem (`eq_sSup_openInfs`). When D' is a continuous lattice, $f'(y)$ is the directed supremum over Scott-open $U \ni y$ of the values $\sqcap f'[U]$ (open-set `sInf` representation of a Scott map at a point).

Scott's *continuous* lattice structure on $[D \to D']$ (`ContinuousLattice (ScottMap D D')`) is proved later via `stepMap.isContinuousLattice`, not in this file.

scottContinuous.lean

```
module

public import DomainTheory.ContinuousLattice.ContinuousLattices.IdempotentFixedPoint.
    completeLattice
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection
public import DomainTheory.ContinuousLattice.FunctionSpaces.proposition_2_10
public import DomainTheory.ContinuousLattice.ScottMaps.preservesDirectedSup_monotone
public import DomainTheory.ContinuousLattice.Specialization.scottTopologicalSpace
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import Mathlib.Topology.Defs.Basic
public import Mathlib.Data.Set.Basic

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

variable {L : Type*} [CompleteLattice L] {e : L → L}

namespace IdempotentFixedPoint

theorem incl_preservesDirectedSup (hidem : ∀ x, e (e x) = e x) (hsc :
    PreservesDirectedSup e) :
    letI := IdempotentFixedPoint.completeLattice hidem (preservesDirectedSup_monotone
    hsc)
    PreservesDirectedSup (Subtype.val : IdempotentFixedPoint e → L) := by
  let := IdempotentFixedPoint.completeLattice hidem (preservesDirectedSup_monotone hsc
    )
  intro S hS hSdir
  show e (sSup (Subtype.val '' S)) = sSup (Subtype.val '' S)
  have hdir' : DirectedOn (· ≤ ·) (Subtype.val '' S) := by
    rintro _ ⟨a, ha, rfl⟩ _ ⟨b, hb, rfl⟩
    obtain ⟨c, hc, hac, hbc⟩ := hSdir a ha b hb
```

```
    exact ⟨c.val, Set.mem_image_of_mem _ hc, hac, hbc⟩
  have hne' : (Subtype.val '' S).Nonempty := hS.image _
  rw [hsc hne' hdir']
  congr 1
  rw [← Set.image_comp]
  exact Set.image_congr (fun s _ => s.2)

theorem retr_preservesDirectedSup (hidem : ∀ x, e (e x) = e x) (hsc :
    PreservesDirectedSup e) :
    letI := IdempotentFixedPoint.completeLattice hidem (preservesDirectedSup_monotone
    hsc)
    PreservesDirectedSup (fun x : L => (⟨e x, hidem x⟩ : IdempotentFixedPoint e)) := by
  let := IdempotentFixedPoint.completeLattice hidem (preservesDirectedSup_monotone hsc
    )
  have hmono := preservesDirectedSup_monotone hsc
  intro T hT hTdir
  apply Subtype.ext
  rw [completeLattice.coe hidem hmono]
  show e (sSup T) = e (sSup (Subtype.val '' ((fun x : L =>
      (⟨e x, hidem x⟩ : IdempotentFixedPoint e)) '' T)))
  have himg : Subtype.val '' ((fun x : L => (⟨e x, hidem x⟩ : IdempotentFixedPoint e))
    '' T) =
      e '' T := by
    rw [← Set.image_comp]; rfl
  rw [himg]
  have hTdir' : DirectedOn (· ≤ ·) (e '' T) := by
    rintro _ ⟨a, ha, rfl⟩ _ ⟨b, hb, rfl⟩
    obtain ⟨c, hc, hac, hbc⟩ := hTdir a ha b hb
    exact ⟨e c, Set.mem_image_of_mem _ hc, hmono hac, hmono hbc⟩
  have hTne' : (e '' T).Nonempty := hT.image _
  rw [hsc hT hTdir, hsc hTne' hTdir']
  congr 1
  rw [← Set.image_comp]
  exact Set.image_congr (fun x _ => (hidem x).symm)

noncomputable def retraction (hidem : ∀ x, e (e x) = e x) (hsc : PreservesDirectedSup e
    ) :
    @ContinuousLatticeRetraction (IdempotentFixedPoint e) L
      (IdempotentFixedPoint.completeLattice hidem (preservesDirectedSup_monotone hsc))
     _ :=
  letI := IdempotentFixedPoint.completeLattice hidem (preservesDirectedSup_monotone
    hsc)
  { incl := ⟨Subtype.val,
      PreservesDirectedSup.continuous_of (incl_preservesDirectedSup hidem hsc)⟩
    retr := ⟨fun x => ⟨e x, hidem x⟩,
      PreservesDirectedSup.continuous_of (retr_preservesDirectedSup hidem hsc)⟩
    retr_incl := fun k => Subtype.ext k.2 }

theorem isContinuousLattice (hidem : ∀ x, e (e x) = e x) (hsc : PreservesDirectedSup e)
    (hL : ContinuousLattice L) :
    @ContinuousLattice (IdempotentFixedPoint e)
      (IdempotentFixedPoint.completeLattice hidem (preservesDirectedSup_monotone hsc))
     := by
  let := IdempotentFixedPoint.completeLattice hidem (preservesDirectedSup_monotone hsc
    )
  exact (proposition_2_10 (retraction hidem hsc) hL).1
```

```
theorem scottTopology (hidem : ∀ x, e (e x) = e x) (hsc : PreservesDirectedSup e)
    (hL : ContinuousLattice L) :
    @scottTopologicalSpace (IdempotentFixedPoint e)
        (IdempotentFixedPoint.completeLattice hidem (preservesDirectedSup_monotone hsc
    )) =
      TopologicalSpace.induced (Subtype.val : IdempotentFixedPoint e → L)
    scottTopologicalSpace := by
  let := IdempotentFixedPoint.completeLattice hidem (preservesDirectedSup_monotone hsc
    )
  exact (proposition_2_10 (retraction hidem hsc) hL).2

end IdempotentFixedPoint

end DomainTheory.ContinuousLattice
```

continuousLattice_scottTopology_of_injective.lean

```
module

public import DomainTheory.ContinuousLattice.ContinuousLattices.
    injective_homeomorph_to_continuousLatticeScott
public import DomainTheory.ContinuousLattice.ContinuousLattices.
    orderIsoScottHomeomorph
public import DomainTheory.ContinuousLattice.Specialization.SpecializationPreorder

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

universe u

/-- If specialization equals a given complete-lattice order on an injective `T₀` space,
     that
lattice is continuous and the given topology is its Scott topology. -/
theorem continuousLattice_scottTopology_of_injective {A : Type u}
    [latticeA : CompleteLattice A] [τA : TopologicalSpace A]
    [T0Space A] (hA : InjectiveSpace.{u, u} A)
    (hspec : ∀ x y : A, SpecializationPreorder x y ↔ @LE.le A latticeA.toLE x y) :
    ContinuousLattice A ∧
      (@scottTopologicalSpace A latticeA) = τA := by
  obtain ⟨E, instE, hE, ⟨h⟩⟩ := injective_homeomorph_to_continuousLatticeScott hA
  let : CompleteLattice E := instE
  let : TopologicalSpace E := @scottTopologicalSpace E instE
  let : Preorder A := latticeA.toPreorder
  let : Preorder E := instE.toPreorder
  let e : A ≃o E := h.toEquiv.toOrderIso
    (fun x y hxy => by
      exact SpecializationPreorder.scott_iff.mp
        (SpecializationPreorder.map ((hspec x y).mpr hxy) h.continuous))
    (fun x y hxy => by
      exact (hspec (h.symm x) (h.symm y)).mp
        (SpecializationPreorder.map (SpecializationPreorder.scott_iff.mpr hxy) h.symm.
```

```
    continuous))
  have hcont : ContinuousLattice A := ContinuousLattice.orderIso e hE
  refine ⟨hcont, ?_⟩
  have heqOrder :
      (@scottTopologicalSpace A latticeA) =
        TopologicalSpace.induced (e : A → E) (@scottTopologicalSpace E instE) := by
    let : TopologicalSpace A := @scottTopologicalSpace A latticeA
    exact (@orderIsoScottHomeomorph A E latticeA instE e).isInducing.eq_induced
  have heqHome :
      τA = TopologicalSpace.induced (h : A → E) (@scottTopologicalSpace E instE) :=
    (@Homeomorph.isInducing A E τA (@scottTopologicalSpace E instE) h).eq_induced
  exact heqOrder.trans heqHome.symm

end DomainTheory.ContinuousLattice
```

ScottMap.lean

```
module

public import Mathlib.Order.FixedPoints
import DomainTheory.ContinuousLattice.ScottMaps.preservesDirectedSup_monotone
import DomainTheory.ContinuousLattice.ScottMaps.scottOpen_preimage
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5 -- shake: keep

@[expose] public section

universe u v

namespace DomainTheory.ContinuousLattice

open Set Topology TopologicalSpace

variable {D D' D'' : Type*} [CompleteLattice D] [CompleteLattice D'] [CompleteLattice
    D'']

def ScottMap (D : Type u) (D' : Type v) [CompleteLattice D] [CompleteLattice D'] :
    Type _ :=
  { f : D → D' // @Continuous D D' scottTopologicalSpace scottTopologicalSpace f }

namespace ScottMap

instance : CoeFun (ScottMap D D') (fun _ => D → D') where
  coe f := f.1

@[ext]
theorem ext {f g : ScottMap D D'} (h : ∀ x, f x = g x) : f = g :=
  Subtype.ext (funext h)

def const (c : D') : ScottMap D D' :=
  ⟨fun _ => c, PreservesDirectedSup.continuous_of fun S hS _ => by
    obtain ⟨x, hx⟩ := hS
    apply le_antisymm
    · exact le_sSup ⟨x, hx, rfl⟩
    · apply sSup_le
```

```
      intro b hb
      obtain ⟨y, hy, rfl⟩ := hb
      exact le_rfl⟩

@[simp] theorem const_apply (c : D') (x : D) : (ScottMap.const c : D → D') x = c :=
    rfl

def le {D : Type u} {D' : Type v} [CompleteLattice D] [CompleteLattice D']
    (f g : ScottMap D D') : Prop :=
  letI : LE D' :=
    (ChainCompletePartialOrder.instOfCompleteLattice
      (α := D')).toPartialOrder.toPreorder.toLE
  ∀ x, f x ≤ g x

def lt {D : Type u} {D' : Type v} [CompleteLattice D] [CompleteLattice D']
    (f g : ScottMap D D') : Prop :=
  ScottMap.le f g ∧ ¬ ScottMap.le g f

theorem le_refl' {D : Type u} {D' : Type v}
    [CompleteLattice D] [CompleteLattice D'] (f : ScottMap D D') :
    ScottMap.le f f :=
  fun _ => le_rfl

theorem le_trans' {D : Type u} {D' : Type v}
    [CompleteLattice D] [CompleteLattice D'] (f g h : ScottMap D D')
    (hfg : ScottMap.le f g) (hgh : ScottMap.le g h) : ScottMap.le f h :=
  fun x => le_trans (hfg x) (hgh x)

theorem le_antisymm' {D : Type u} {D' : Type v}
    [CompleteLattice D] [CompleteLattice D'] (f g : ScottMap D D')
    (hfg : ScottMap.le f g) (hgf : ScottMap.le g f) : f = g :=
  ScottMap.ext fun x => le_antisymm (hfg x) (hgf x)

theorem lt_iff_le_not_ge' {D : Type u} {D' : Type v}
    [CompleteLattice D] [CompleteLattice D'] (f g : ScottMap D D') :
    ScottMap.lt f g ↔ ScottMap.le f g ∧ ¬ ScottMap.le g f :=
  Iff.rfl

instance instPartialOrder {D : Type u} {D' : Type v}
    [CompleteLattice D] [CompleteLattice D'] : PartialOrder (ScottMap D D') where
  le := ScottMap.le
  lt := ScottMap.lt
  le_refl := le_refl'
  le_trans := le_trans'
  lt_iff_le_not_ge := lt_iff_le_not_ge'
  le_antisymm := le_antisymm'

theorem le_def {f g : ScottMap D D'} : f ≤ g ↔ ∀ x, (f : D → D') x ≤ g x := Iff.rfl

theorem preservesDirectedSup_coe (f : ScottMap D D') (S : Set D) (hS : S.Nonempty)
    (hSdir : DirectedOn (· ≤ ·) S) :
    (f : D → D') (sSup S) = sSup (Set.image (f : D → D') S) := by
  have h := (proposition_2_5 (Subtype.val f)).mp f.property
  exact h hS hSdir

theorem monotone (f : ScottMap D D') : Monotone (f : D → D') :=
```

```
  preservesDirectedSup_monotone ((proposition_2_5 (Subtype.val f)).mp f.property)

theorem pointwise_sSup_preservesDirectedSup (F : Set (ScottMap D D')) :
    PreservesDirectedSup (fun x => sSup (Set.image (fun f : ScottMap D D' => (f : D →
    D') x) F)) := by
  intro S hS hSdir
  set H := fun x => sSup (Set.image (fun f : ScottMap D D' => (f : D → D') x) F)
  show H (sSup S) = sSup (Set.image H S)
  apply le_antisymm
  · apply sSup_le
    intro b hb
    obtain ⟨f, hfF, rfl⟩ := hb
    change f (sSup S) ≤ sSup (Set.image H S)
    rw [f.preservesDirectedSup_coe S hS hSdir]
    apply sSup_le
    intro c hc
    obtain ⟨s, hsS, rfl⟩ := hc
    exact le_trans (le_sSup (Set.mem_image_of_mem (fun g : ScottMap D D' => (g : D → D
    ') s) hfF))
      (le_sSup (Set.mem_image_of_mem H hsS))
  · apply sSup_le
    intro b hb
    obtain ⟨s, hsS, rfl⟩ := hb
    apply sSup_le
    intro c hc
    obtain ⟨f, hfF, rfl⟩ := hc
    exact le_trans (ScottMap.monotone f (le_sSup hsS))
      (le_sSup (Set.mem_image_of_mem (fun g : ScottMap D D' => (g : D → D') (sSup S))
    hfF))

theorem sSupMaps_continuous {D : Type u} {D' : Type v}
    [CompleteLattice D] [CompleteLattice D'] (F : Set (ScottMap D D')) :
    @Continuous D D' scottTopologicalSpace scottTopologicalSpace
      (fun x => sSup (Set.image (fun f : ScottMap D D' => (f : D → D') x) F)) :=
  PreservesDirectedSup.continuous_of (pointwise_sSup_preservesDirectedSup F)

noncomputable def sSupMaps {D : Type u} {D' : Type v}
    [CompleteLattice D] [CompleteLattice D'] (F : Set (ScottMap D D')) : ScottMap D D'
     :=
  ⟨fun x => sSup (Set.image (fun f : ScottMap D D' => (f : D → D') x) F),
    sSupMaps_continuous F⟩

theorem sSupMaps_apply (F : Set (ScottMap D D')) (x : D) :
    (sSupMaps F : D → D') x =
      sSup (Set.image (fun f : ScottMap D D' => (f : D → D') x) F) :=
  rfl

noncomputable instance instSupSet {D : Type u} {D' : Type v}
    [CompleteLattice D] [CompleteLattice D'] : SupSet (ScottMap D D') := ⟨sSupMaps⟩

theorem sSup_apply (F : Set (ScottMap D D')) (x : D) :
    ((sSup F : ScottMap D D') : D → D') x =
      sSup (Set.image (fun f : ScottMap D D' => (f : D → D') x) F) :=
  rfl

theorem isLUB_sSup {D : Type u} {D' : Type v}
```

```
    [CompleteLattice D] [CompleteLattice D'] (F : Set (ScottMap D D')) :
    IsLUB F (sSup F) := by
  constructor
  · intro f hf
    rw [le_def]
    intro x
    rw [sSup_apply]
    exact le_sSup (Set.mem_image_of_mem _ hf)
  · intro g hg
    rw [le_def]
    intro x
    rw [sSup_apply]
    refine sSup_le ?_
    rintro _ ⟨f, hfF, rfl⟩
    exact (hg hfF) x

noncomputable instance instCompleteLattice {D : Type u} {D' : Type v}
    [CompleteLattice D] [CompleteLattice D'] : CompleteLattice (ScottMap D D') :=
  completeLatticeOfSup (ScottMap D D') isLUB_sSup

theorem preservesDirectedSup_comp {f : D' → D''} {g : D → D'} (hf :
    PreservesDirectedSup f)
    (hg : PreservesDirectedSup g) : PreservesDirectedSup (f ∘ g) := by
  intro S hS hSdir
  have hmono : Monotone g := preservesDirectedSup_monotone hg
  have hdir' : DirectedOn (· ≤ ·) (g '' S) := by
    intro p hp q hq
    obtain ⟨a, ha, rfl⟩ := hp
    obtain ⟨b, hb, rfl⟩ := hq
    obtain ⟨c, hc, hac, hbc⟩ := hSdir a ha b hb
    exact ⟨g c, Set.mem_image_of_mem g hc, hmono hac, hmono hbc⟩
  have hne : (g '' S).Nonempty := Set.image_nonempty.2 hS
  rw [Function.comp_apply, hg hS hSdir, hf hne hdir']
  congr 1
  exact (Set.image_comp f g S).symm

def comp (f : ScottMap D' D'') (g : ScottMap D D') : ScottMap D D'' :=
  ⟨f ∘ g, PreservesDirectedSup.continuous_of (preservesDirectedSup_comp
    ((proposition_2_5 (Subtype.val f)).mp f.property)
    ((proposition_2_5 (Subtype.val g)).mp g.property))⟩

@[simp] theorem comp_apply (f : ScottMap D' D'') (g : ScottMap D D') (x : D) :
    (f.comp g : D → D'') x = f (g x) := rfl

theorem continuous (f : ScottMap D D') :
    @Continuous D D' scottTopologicalSpace scottTopologicalSpace f :=
  f.2

def idMap : ScottMap D D :=
  ⟨fun x => x, PreservesDirectedSup.continuous_of fun S _ _ => by
    show sSup S = sSup (Set.image (fun x => x) S)
    rw [Set.image_id']⟩

@[simp] theorem idMap_apply (x : D) : (idMap : ScottMap D D) x = x := rfl

theorem bot_apply (x : D) : ((⊥ : ScottMap D D') : D → D') x = ⊥ := by
```

```
  have h : (⊥ : ScottMap D D') = sSup (∅ : Set (ScottMap D D')) := rfl
  rw [h, sSup_apply, Set.image_empty, sSup_empty]

theorem sup_apply (f g : ScottMap D D') (x : D) :
    ((f ⊔ g : ScottMap D D') : D → D') x = f x ⊔ g x := by
  have h : (f ⊔ g : ScottMap D D') = sSup ({f, g} : Set (ScottMap D D')) := rfl
  rw [h, sSup_apply, Set.image_pair]
  exact sSup_pair

theorem sInf_image_le_of_mem {f' : ScottMap D D'} {U : Set D} {y : D} (hyU : y ∈ U) :
    sInf (Set.image (f' : D → D') U) ≤ f' y :=
  sInf_le (Set.mem_image_of_mem _ hyU)

theorem eq_sSup_openInfs (hD' : ContinuousLattice D') (f' : ScottMap D D') (y : D) :
    (f' : D → D') y =
      sSup { d | ∃ U, @IsOpen D scottTopologicalSpace U ∧ y ∈ U ∧
        d = sInf (Set.image (f' : D → D') U) } := by
  apply le_antisymm
  · rw [← hD'.sSup_wayBelow (f' y)]
    apply sSup_le
    intro a ha
    obtain ⟨V, hV, hf'V, hVsub⟩ := ha
    have hyU : y ∈ (f' : D → D') ^-1' V := hf'V
    have hUScott : ScottOpen ((f' : D → D') ^-1' V) :=
      scottOpen_preimage ((proposition_2_5 (Subtype.val f')).mp f'.property) hV
    have hUopen : @IsOpen D scottTopologicalSpace ((f' : D → D') ^-1' V) :=
      ScottOpen.isOpen_iff.mpr hUScott
    have ha' : a ≤ sInf (Set.image (f' : D → D') ((f' : D → D') ^-1' V)) := by
      apply le_sInf
      intro d hd
      obtain ⟨z, hzV, rfl⟩ := hd
      exact Set.mem_Ici.1 (hVsub hzV)
    have hmem : sInf (Set.image (f' : D → D') ((f' : D → D') ^-1' V)) ∈
        { d | ∃ U, @IsOpen D scottTopologicalSpace U ∧ y ∈ U ∧
          d = sInf (Set.image (f' : D → D') U) } :=
      ⟨(f' : D → D') ^-1' V, hUopen, hyU, rfl⟩
    exact le_trans ha' (le_sSup hmem)
  · apply sSup_le
    intro d hd
    obtain ⟨U, _hUopen, hyU, rfl⟩ := hd
    exact sInf_image_le_of_mem (f' := f') (y := y) (U := U) hyU

noncomputable def con : ScottMap D (ScottMap D D) :=
  ⟨fun x => ScottMap.const x, PreservesDirectedSup.continuous_of (by
    intro S _ _
    apply ScottMap.ext
    intro y
    rw [ScottMap.sSup_apply, Set.image_image]
    simp only [ScottMap.const_apply, Set.image_id'])⟩

noncomputable def min : ScottMap (ScottMap D D) D :=
  ⟨fun f => (f : D → D) ⊥, PreservesDirectedSup.continuous_of (by
    intro F _ _
    show ((sSup F : ScottMap D D) : D → D) ⊥
      = sSup (Set.image (fun f : ScottMap D D => (f : D → D) ⊥) F)
    rw [ScottMap.sSup_apply])⟩
```

```
def toOrderHom (f : ScottMap D D) : D →o D := ⟨(f : D → D), f.monotone⟩

noncomputable def fix (f : ScottMap D D) : D := (toOrderHom f).lfp

theorem fix_le {f : ScottMap D D} {x : D} (h : (f : D → D) x ≤ x) : fix f ≤ x :=
  (toOrderHom f).lfp_le h

theorem fix_eq (f : ScottMap D D) : (f : D → D) (fix f) = fix f :=
  (toOrderHom f).map_lfp

theorem fix_mono {f f' : ScottMap D D} (hff' : f ≤ f') : fix f ≤ fix f' :=
  fix_le (le_trans (ScottMap.le_def.mp hff' (fix f')) (le_of_eq (fix_eq f')))

theorem fix_unique {f : ScottMap D D} {a : D} (hfix : (f : D → D) a = a)
    (hleast : ∀ x, (f : D → D) x ≤ x → a ≤ x) : a = fix f :=
  le_antisymm (hleast (fix f) (le_of_eq (fix_eq f))) (fix_le hfix.le)

theorem fix_preservesDirectedSup : PreservesDirectedSup (fix : ScottMap D D → D) := by
  intro S hSne hSdir
  set T : Set D := Set.image fix S with hTdef
  have hTne : T.Nonempty := hSne.image fix
  have hTdir : DirectedOn (· ≤ ·) T := by
    rintro _ ⟨f, hf, rfl⟩ _ ⟨f', hf', rfl⟩
    obtain ⟨h, hh, hfh, hf'h⟩ := hSdir f hf f' hf'
    exact ⟨fix h, Set.mem_image_of_mem fix hh, fix_mono hfh, fix_mono hf'h⟩
  show fix (sSup S) = sSup T
  apply le_antisymm
  · apply fix_le
    show ((sSup S : ScottMap D D) : D → D) (sSup T) ≤ sSup T
    rw [ScottMap.sSup_apply]
    apply sSup_le
    rintro _ ⟨f, hf, rfl⟩
    show (f : D → D) (sSup T) ≤ sSup T
    rw [f.preservesDirectedSup_coe T hTne hTdir]
    apply sSup_le
    rintro _ ⟨_, ⟨f', hf', rfl⟩, rfl⟩
    obtain ⟨h, hh, hfh, hf'h⟩ := hSdir f hf f' hf'
    calc (f : D → D) (fix f')
        ≤ (h : D → D) (fix f') := ScottMap.le_def.mp hfh (fix f')
      _ ≤ (h : D → D) (fix h) := h.monotone (fix_mono hf'h)
      _ = fix h := fix_eq h
      _ ≤ sSup T := le_sSup (Set.mem_image_of_mem fix hh)
  · apply sSup_le
    rintro _ ⟨f, hf, rfl⟩
    exact fix_mono (le_sSup hf)

noncomputable def fixMap : ScottMap (ScottMap D D) D :=
  ⟨fix, PreservesDirectedSup.continuous_of fix_preservesDirectedSup⟩

@[simp] theorem fixMap_apply (f : ScottMap D D) : (fixMap f : D) = fix f := rfl

end ScottMap

end DomainTheory.ContinuousLattice
```

1.4.4 Step function (pointwise) ✓

Pointwise values for Scott's $\overrightarrow{e}[e, e']$ before packaging as a **`ScottMap`**.

Scott's Theorem 3.3 proof uses the pointwise step values that later become the step maps in **`ScottMap D D'`**. For $e \in D$, $e' \in D'$, and $x \in D$, **`stepFun e e' x`** is that value before continuity is packaged (the case split $e'/\bot$ from $e \ll x$).

Namespace **`stepFun`** collects:

Lemma (`of_wayBelow`). If $e \ll x$, then **`stepFun e e' x = e'`**.

Lemma (`of_not_wayBelow`). If $\neg(e \ll x)$, then **`stepFun e e' x = \bot`**.

Theorem (`preservesDirectedSup`). **`stepFun e e'`** preserves directed suprema (hence is Scott-continuous).

stepFun.lean

```
module
public import DomainTheory.ContinuousLattice.WayBelow.WayBelow
public import DomainTheory.ContinuousLattice.ScottMaps.PreservesDirectedSup
import Mathlib.Order.BourbakiWitt

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set Topology TopologicalSpace

variable {X Y D D' D'' D₀ D₀' D₁ D₁' : Type*}

variable [TopologicalSpace X] [TopologicalSpace Y]

variable [CompleteLattice D] [CompleteLattice D'] [CompleteLattice D'']

variable [CompleteLattice D₀] [CompleteLattice D₀'] [CompleteLattice D₁] [
    CompleteLattice D₁']

noncomputable def stepFun (e : D) (e' : D') (x : D) : D' := ⋃ _ : e ≪ x, e'

namespace stepFun

theorem of_wayBelow {e : D} {e' : D'} {x : D} (h : e ≪ x) : stepFun e e' x = e' :=
  iSup_pos h

theorem of_not_wayBelow {e : D} {e' : D'} {x : D} (h : ¬ e ≪ x) :
    stepFun e e' x = ⊥ :=
  iSup_neg h

theorem preservesDirectedSup (e : D) (e' : D') :
    PreservesDirectedSup (stepFun e e') := by
  intro S hS hSdir
  show stepFun e e' (sSup S) = sSup (Set.image (stepFun e e') S)
  by_cases h : e ≪ sSup S
  · rw [of_wayBelow h]
    obtain ⟨s, hsS, hes⟩ := (ScottOpen.wayBelow e).2 hS hSdir h
    apply le_antisymm
    · refine le_sSup_of_le (Set.mem_image_of_mem _ hsS) ?_
      rw [of_wayBelow hes]
```

```
    · refine sSup_le ?_
      rintro _ ⟨x, _, rfl⟩
      exact iSup_le fun _ => le_rfl
  · rw [of_not_wayBelow h]
    refine (sSup_eq_bot.2 ?_).symm
    rintro _ ⟨x, hxS, rfl⟩
    refine of_not_wayBelow (fun hex => ?_)
    exact h (hex.trans_le (le_sSup hxS))

end stepFun

end DomainTheory.ContinuousLattice
```

1.4.5 Step map $\overrightarrow{e}[e, e']$ ✓

Scott's step functions as elements of **`ScottMap D D'`** (Theorem 3.3).

For $e \in D$ and $e' \in D'$, **`stepMap e e'`** is Scott's step function $\overrightarrow{e}[e, e'] \in$ **`ScottMap D D'`** (built from **`stepFun`** and **`stepFun.preservesDirectedSup`**).

Namespace **`stepMap`** collects the step-function tools used in Theorem 3.3(a):

Lemma (`apply_of_wayBelow`). If $e \ll x$, then `(stepMap e e') x = e'`.

Lemma (`le_of_wayBelow`). If $e' \ll f(e)$, then `stepMap e e' ≤ f` in **`ScottMap D D'`**.

Lemma (`wayBelow`). If $e' \ll f(e)$, then `stepMap e e' ≪ f`.

Theorem (`pointwise_sSup`). For **`ContinuousLattice D`**, **`ContinuousLattice D'`**, $f \in$ **`ScottMap D D'`**, and $x \in D$, $(fx) = \bigsqcup\{\, e' \mid \exists e,\ e \ll x \wedge e' \ll f(e) \,\}$.

Theorem (`isContinuousLattice`). If **`ContinuousLattice D`** and **`ContinuousLattice D'`**, then **`ScottMap D D'`** is a continuous lattice (Theorem 3.3(a); proof combines **`pointwise_sSup`**, **`wayBelow`**, and **`apply_of_wayBelow`**).

stepMap.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.stepFun
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set Topology TopologicalSpace

variable {D D' : Type*} [CompleteLattice D] [CompleteLattice D']

noncomputable def stepMap (e : D) (e' : D') : ScottMap D D' :=
  ⟨stepFun e e', PreservesDirectedSup.continuous_of (stepFun.preservesDirectedSup e e')
    ⟩

namespace stepMap

theorem apply_of_wayBelow {e : D} {e' : D'} {x : D} (h : e ≪ x) :
    (stepMap e e' : D → D') x = e' :=
```

```
  stepFun.of_wayBelow h

theorem le_of_wayBelow {e : D} {e' : D'} {g : ScottMap D D'}
    (h : e' ≪ (g : D → D') e) : stepMap e e' ≤ g := by
  rw [ScottMap.le_def]
  intro x
  by_cases hex : e ≪ x
  · rw [apply_of_wayBelow hex]
    exact h.le.trans (g.monotone hex.le)
  · show stepFun e e' x ≤ (g : D → D') x
    rw [stepFun.of_not_wayBelow hex]
    exact bot_le

theorem wayBelow {e : D} {e' : D'} {f : ScottMap D D'}
    (he' : e' ≪ (f : D → D') e) : stepMap e e' ≪ f := by
  refine ⟨{g : ScottMap D D' | e' ≪ (g : D → D') e}, ⟨?_, ?_⟩, he', ?_⟩
  · intro g g' hgg' hg
    exact hg.trans_le (hgg' e)
  · intro F hFne hFdir hmem
    simp only [Set.mem_ofPred_eq, ScottMap.sSup_apply] at hmem
    have hne : (Set.image (fun g : ScottMap D D' => (g : D → D') e) F).Nonempty :=
    hFne.image _
    have hdir : DirectedOn (· ≤ ·) (Set.image (fun g : ScottMap D D' => (g : D → D') e
    ) F) := by
      rintro _ ⟨a, ha, rfl⟩ _ ⟨b, hb, rfl⟩
      obtain ⟨c, hc, hac, hbc⟩ := hFdir a ha b hb
      exact ⟨(c : D → D') e, Set.mem_image_of_mem _ hc, hac e, hbc e⟩
    obtain ⟨_, ⟨g, hgF, rfl⟩, hg⟩ := (WayBelow.sSup_iff hne hdir).1 hmem
    exact ⟨g, hgF, hg⟩
  · intro g hg
    exact Set.mem_Ici.2 (le_of_wayBelow hg)

theorem pointwise_sSup (hD : ContinuousLattice D) (hD' : ContinuousLattice D') (f :
    ScottMap D D')
    (x : D) :
    sSup {e' : D' | ∃ e, e ≪ x ∧ e' ≪ (f : D → D') e} = (f : D → D') x := by
  apply le_antisymm
  · refine sSup_le ?_
    rintro e' ⟨e, hex, he'⟩
    exact he'.le.trans (f.monotone hex.le)
  · rw [← hD'.sSup_wayBelow ((f : D → D') x)]
    refine sSup_le ?_
    intro w hw
    have hfx : (f : D → D') x = sSup (Set.image (f : D → D') {e | e ≪ x}) := by
      rw [← f.preservesDirectedSup_coe {e | e ≪ x} ⟨⊥, WayBelow.bot x⟩ (WayBelow.
    directedOn x),
        hD.sSup_wayBelow x]
    rw [hfx] at hw
    have hne : (Set.image (f : D → D') {e | e ≪ x}).Nonempty := ⟨f ⊥, ⊥, WayBelow.bot
     x, rfl⟩
    have hdir : DirectedOn (· ≤ ·) (Set.image (f : D → D') {e | e ≪ x}) := by
      rintro _ ⟨a, ha, rfl⟩ _ ⟨b, hb, rfl⟩
      obtain ⟨c, hc, hac, hbc⟩ := WayBelow.directedOn x a ha b hb
      exact ⟨f c, Set.mem_image_of_mem _ hc, f.monotone hac, f.monotone hbc⟩
    obtain ⟨_, ⟨e, hex, rfl⟩, hwe⟩ := (WayBelow.sSup_iff hne hdir).1 hw
    exact le_sSup ⟨e, hex, hwe⟩
```

```
theorem isContinuousLattice (hD : ContinuousLattice D) (hD' : ContinuousLattice D') :
    ContinuousLattice (ScottMap D D') := by
  refine { out := ?_ }
  intro f
  refine ⟨fun h hh => hh.le, fun g hg => ?_⟩
  rw [ScottMap.le_def]
  intro x
  rw [← pointwise_sSup hD hD' f x]
  refine sSup_le ?_
  rintro e' ⟨e, hex, he'⟩
  have hle : stepMap e e' ≤ g := hg (wayBelow he')
  have hx := (ScottMap.le_def.1 hle) x
  rwa [apply_of_wayBelow hex] at hx

end stepMap

end DomainTheory.ContinuousLattice
```

1.4.6 Proposition 3.2 ✓

3.2 Proposition. *The induced partial ordering on* $[X \to Y]$ *is such that:*

$$f \sqsubseteq g \quad \text{iff} \quad f(x) \sqsubseteq g(x) \text{ for all } x \in X,$$

where $f, g \in [X \to Y]$. □
where $f, g \in [X \to Y]$. □
The first question, of course, is what kind of a partial ordering this is.

proposition_3_2.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottFunctionTopology

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set Topology TopologicalSpace

variable {X Y : Type*} [TopologicalSpace X] [TopologicalSpace Y]

theorem proposition_3_2 {f g : C(X, Y)} :
    letI := scottFunctionTopology X Y
    (SpecializationPreorder f g ↔ ∀ x, SpecializationPreorder (f x) (g x)) :=
  scottFunctionTopology.specializationPreorder

end DomainTheory.ContinuousLattice
```

1.4.7 Product topology on $[D \to D']$ ✓

For complete lattices D and D', the library topologizes **`ScottMap D D'`** (Scott-continuous maps $D \to D'$; see Elements of $[D \to D']$) with the *product* or pointwise-convergence topology: subbasic sets have the same shape as in Definition 3.1,

$$\{f : f(x) \in U\}$$

with $x \in D$ and $U \subseteq D'$ open in **`scottTopologicalSpace`**.

Definition (`scottMapInducedPiTopology D D'`). `TopologicalSpace (ScottMap D D')` induced from the pi topology on D'^D (each fiber carries **`scottTopologicalSpace`**) along the inclusion **`ScottMap D D' ↪ (D → D')`**.

Namespace **`scottMapInducedPiTopology`** packages the equivalent eval subbase (parallel to **`scottFunctionTopology`** in Definition 3.1):

Definition (`pointwiseSubbasis`). Subbasic sets $\{\, f \mid f(x) \in U \,\}$ for $f \in$ **`ScottMap D D'`**, $x \in D$, and $U \subseteq D'$ Scott-open.

Definition (`pointwiseTopology`). `generateFrom (pointwiseSubbasis D D').`

Lemma (`subbasic_isOpen`). For Scott-open $U \subseteq D'$ and $x \in D$, the subbasic set $\{\, f \mid f(x) \in U \,\}$ is open in **`pointwiseTopology D D'`**.

Theorem (`eq_induced_pi`). `pointwiseTopology D D' = scottMapInducedPiTopology D D'` — the eval subbase and the induced pi topology agree.

When D and D' are continuous lattices, the Scott topology on **`ScottMap D D'`** (from **`isContinuousLattice`** in namespace **`stepMap`**) agrees with this product topology:

Lemma (`pointwiseSubbasic_scottOpen`). Eval subbasic sets are Scott-open in **`ScottMap D D'`**.

Lemma (`wayBelow_le_finset_sup_step`). From $\varphi \ll$ **`g`**, a finite finset of step maps majorizes φ.

Lemma (`wayBelow_finset_sup`). A finite sup of way-below elements is way-below **`g`**.

Theorem (`scottTopology_eq_pointwise`). On **`ScottMap D D'`**, **`scottTopologicalSpace = pointwiseTopology D D'`** (uses the three lemmas above).

Theorem (`scottTopology_eq_inducedPi`). On **`ScottMap D D'`**, **`scottTopologicalSpace = scottMapInducedPiTopology D D'`** (from **`scottTopology_eq_pointwise`** and **`eq_induced_pi`**). This is Theorem 3.3(b).

scottMapInducedPiTopology.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.WayBelow.ScottOpen
public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.stepMap
public import Mathlib.Data.Finset.Lattice.Fold

@[expose] public section

universe u v

namespace DomainTheory.ContinuousLattice
```

```
open Set Topology TopologicalSpace

namespace scottMapInducedPiTopology

variable {X Y D D' D'' D₀ D₀' D₁ D₁' : Type*}
variable [TopologicalSpace X] [TopologicalSpace Y]
variable [CompleteLattice D] [CompleteLattice D'] [CompleteLattice D'']
variable [CompleteLattice D₀] [CompleteLattice D₀'] [CompleteLattice D₁] [
    CompleteLattice D₁']

theorem wayBelow_finset_sup {ι L : Type*} [CompleteLattice L] {s : Finset ι} {f : ι → L
    } {g : L}
    (h : ∀ i ∈ s, f i ≪ g) : s.sup f ≪ g :=
  Finset.sup_induction (p := fun a => a ≪ g) (WayBelow.bot g) (fun _ ha _ hb => ha.sup
    hb) h

theorem pointwiseSubbasic_scottOpen (x : D) {U : Set D'} (hU : ScottOpen U) :
    ScottOpen {f : ScottMap D D' | (f : D → D') x ∈ U} := by
  refine ⟨fun f f' hff' hf => hU.1 (hff' x) hf, fun F hFne hFdir hmem => ?_⟩
  simp only [Set.mem_ofPred_eq, ScottMap.sSup_apply] at hmem
  have hne : (Set.image (fun g : ScottMap D D' => (g : D → D') x) F).Nonempty := hFne.
    image _
  have hdir : DirectedOn (· ≤ ·) (Set.image (fun g : ScottMap D D' => (g : D → D') x)
    F) := by
    rintro _ ⟨a, ha, rfl⟩ _ ⟨b, hb, rfl⟩
    obtain ⟨c, hc, hac, hbc⟩ := hFdir a ha b hb
    exact ⟨(c : D → D') x, Set.mem_image_of_mem _ hc, hac x, hbc x⟩
  obtain ⟨_, ⟨g, hgF, rfl⟩, hg⟩ := hU.2 hne hdir hmem
  exact ⟨g, hgF, hg⟩

theorem wayBelow_le_finset_sup_step (hD : ContinuousLattice D) (hD' :
    ContinuousLattice D')
    {φ g : ScottMap D D'} (h : φ ≪ g) :
    ∃ F : Finset (D × D'), (∀ p ∈ F, (p.2 : D') ≪ (g : D → D') p.1) ∧
      φ ≤ F.sup (fun p => stepMap p.1 p.2) := by
  classical
  set Sg : Set (ScottMap D D') :=
    (fun F : Finset (D × D') => F.sup (fun p => stepMap p.1 p.2)) ''
      {F | ∀ p ∈ F, (p.2 : D') ≪ (g : D → D') p.1} with hSg
  have hSgne : Sg.Nonempty := by
    refine ⟨_, ∅, ?_, rfl⟩
    intro p hp
    exact absurd hp (Finset.notMem_empty p)
  have hSgdir : DirectedOn (· ≤ ·) Sg := by
    rintro _ ⟨F₁, hF₁, rfl⟩ _ ⟨F₂, hF₂, rfl⟩
    refine ⟨(F₁ ∪ F₂).sup (fun p => stepMap p.1 p.2), ⟨F₁ ∪ F₂, fun p hp => ?_, rfl⟩,
      Finset.sup_mono Finset.subset_union_left, Finset.sup_mono Finset.
    subset_union_right⟩
    rcases Finset.mem_union.1 hp with hp | hp
    · exact hF₁ p hp
    · exact hF₂ p hp
  have hSgsup : sSup Sg = g := by
    apply le_antisymm
    · refine sSup_le ?_
      rintro _ ⟨F, hF, rfl⟩
      exact Finset.sup_le fun p hp => stepMap.le_of_wayBelow (hF p hp)
```

```
    · rw [ScottMap.le_def]
      intro x
      rw [← stepMap.pointwise_sSup hD hD' g x]
      refine sSup_le ?_
      rintro e' ⟨e, hex, he'⟩
      have hmemSg : stepMap e e' ∈ Sg := by
        refine ⟨{(e, e')}, fun p hp => ?_, ?_⟩
        · rw [Finset.mem_singleton] at hp; subst hp; exact he'
        · show ({(e, e')} : Finset (D × D')).sup (fun p => stepMap p.1 p.2) = stepMap e
     e'
          rw [Finset.sup_singleton]
      have hx : (stepMap e e' : D → D') x ≤ ((sSup Sg : ScottMap D D') : D → D') x :=
     by
        rw [ScottMap.sSup_apply]
        exact le_sSup ⟨stepMap e e', hmemSg, rfl⟩
      rwa [stepMap.apply_of_wayBelow hex] at hx
  rw [← hSgsup] at h
  obtain ⟨_, ⟨F, hF, rfl⟩, hφs⟩ := (WayBelow.sSup_iff hSgne hSgdir).1 h
  exact ⟨F, hF, hφs.le⟩

section

variable {D D' : Type*} [CompleteLattice D] [CompleteLattice D']

def pointwiseSubbasis (D D' : Type*) [CompleteLattice D] [CompleteLattice D'] :
    Set (Set (ScottMap D D')) :=
  { W | ∃ (x : D) (U : Set D'),
      @IsOpen D' scottTopologicalSpace U ∧ W = {f : ScottMap D D' | (f : D → D') x ∈
    U} }

@[reducible] noncomputable def pointwiseTopology (D D' : Type*)
    [CompleteLattice D] [CompleteLattice D'] : TopologicalSpace (ScottMap D D') :=
  generateFrom (pointwiseSubbasis D D')

theorem subbasic_isOpen (x : D) {U : Set D'} (hU : @IsOpen D' scottTopologicalSpace U)
     :
    @IsOpen (ScottMap D D') (pointwiseTopology D D')
      {f : ScottMap D D' | (f : D → D') x ∈ U} :=
  isOpen_generateFrom_of_mem ⟨x, U, hU, rfl⟩

end

end scottMapInducedPiTopology

@[reducible] noncomputable def scottMapInducedPiTopology (D : Type u) (D' : Type v)
    [CompleteLattice D] [CompleteLattice D'] : TopologicalSpace (ScottMap D D') :=
  TopologicalSpace.induced (fun f : ScottMap D D' => (f : D → D'))
    (@Pi.topologicalSpace D (fun _ => D') (fun _ => scottTopologicalSpace))

namespace scottMapInducedPiTopology

section

variable {D D' : Type*} [CompleteLattice D] [CompleteLattice D']

theorem eq_induced_pi :
```

```
    pointwiseTopology D D' = scottMapInducedPiTopology D D' := by
  apply le_antisymm
  · let : TopologicalSpace D' := scottTopologicalSpace
    let : TopologicalSpace (ScottMap D D') := pointwiseTopology D D'
    change pointwiseTopology D D' ≤ scottMapInducedPiTopology D D'
    rw [← continuous_iff_le_induced]
    exact continuous_pi fun x =>
      continuous_def.2 fun U hU => subbasic_isOpen (D := D) (D' := D') x hU
  · apply le_generateFrom_iff_subset_isOpen.2
    rintro W ⟨x, U, hU, rfl⟩
    let : TopologicalSpace D' := scottTopologicalSpace
    change @IsOpen (ScottMap D D')
      (TopologicalSpace.induced (fun f : ScottMap D D' => (f : D → D'))
        (@Pi.topologicalSpace D (fun _ => D') (fun _ => scottTopologicalSpace)))
      {f : ScottMap D D' | (f : D → D') x ∈ U}
    rw [isOpen_induced_iff]
    exact ⟨{g : D → D' | g x ∈ U}, (@continuous_apply D (fun _ => D')
      (fun _ => scottTopologicalSpace) x).isOpen_preimage U hU, rfl⟩

theorem scottTopology_eq_pointwise (hD : ContinuousLattice D) (hD' : ContinuousLattice
    D') :
    (scottTopologicalSpace : TopologicalSpace (ScottMap D D')) =
      pointwiseTopology D D' := by
  have hL : ContinuousLattice (ScottMap D D') := stepMap.isContinuousLattice hD hD'
  apply le_antisymm
  · apply le_generateFrom_iff_subset_isOpen.2
    rintro W ⟨x, U, hUopen, rfl⟩
    exact ScottOpen.isOpen_iff.mpr (pointwiseSubbasic_scottOpen x (ScottOpen.
    isOpen_iff.mp hUopen))
  · intro U hU
    rw [ScottOpen.isOpen_iff] at hU
    rw [@isOpen_iff_forall_mem_open (ScottMap D D') (pointwiseTopology D D')]
    intro g hgU
    obtain ⟨φ, hφg, hφsub⟩ := exists_wayBelow_subset hL hU hgU
    obtain ⟨F, hF, hφF⟩ := wayBelow_le_finset_sup_step hD hD' hφg
    refine ⟨⋂ p ∈ F, {h : ScottMap D D' | (p.2 : D') ≪ (h : D → D') p.1}, ?_, ?_, ?_⟩
    · intro h hh
      refine hφsub (WayBelow.le_trans hφF (wayBelow_finset_sup fun p hp => ?_))
      exact stepMap.wayBelow (Set.mem_iInter₂.1 hh p hp)
    · exact @isOpen_biInter_finset (ScottMap D D') (D × D') (pointwiseTopology D D') F
    _
        (fun p _ => subbasic_isOpen p.1 (ScottOpen.isOpen_iff.mpr (ScottOpen.wayBelow
    p.2)))
    · exact Set.mem_iInter₂.2 fun p hp => hF p hp

theorem scottTopology_eq_inducedPi (hD : ContinuousLattice D) (hD' : ContinuousLattice
    D') :
    (scottTopologicalSpace : TopologicalSpace (ScottMap D D')) =
      scottMapInducedPiTopology D D' := by
  rw [scottTopology_eq_pointwise hD hD', eq_induced_pi]

end

end scottMapInducedPiTopology

end DomainTheory.ContinuousLattice
```

1.4.8 Theorem 3.3 ✓

3.3 Theorem. If D and D' are continuous lattices, then so is $[D \to D']$ under the induced partial ordering with the lattice topology agreeing with the product topology.

Proof: The argument is "pointwise." Thus, the constant function with value $\perp \in D'$ is obviously continuous and is the $\perp$ of $[D \to D']$ by 3.2. Since by 2.7 the lattice operation $\sqcup$ on D' is continuous, then if $f, g \in [D \to D']$ the composition $f \sqcup g$, defined by

$$(f \sqcup g)(x) = f(x) \sqcup g(x)$$

for all $x \in D$, is also continuous and represents the lub of f, g in $[D \to D']$. (The same arguments apply to $\top$ and $\sqcap$, so $[D \to D']$ is at least a lattice.) To show that $[D \to D']$ is complete it is sufficient now to show that lubs of directed subsets exist. So let $\mathcal{F} \subseteq [D \to D']$ be directed. Define a function from D into D' by the equation:

$$(\bigsqcup \mathcal{F})(x) = \bigsqcup\{f(x) : f \in \mathcal{F}\},$$

for all $x \in D$. If we can show that $\bigsqcup \mathcal{F}$ is continuous, then being in $[D \to D']$ it has to be the lub. Consider $U \subseteq D'$, an open subset. Taking the inverse image and remembering that $\mathcal{F}$ is directed, we find:

$$\{x : (\bigsqcup \mathcal{F})(x) \in U = \bigcup x : f(x) \in U : f \in \mathcal{F}\}.$$

This is an open set, and so $\bigsqcup \mathcal{F}$ is indeed continuous. (Warning: the infinite $\sqcap \mathcal{F}$ are not in general computed pointwise; however, it is easy to extend the above argument to show that arbitrary $\bigsqcup \mathcal{F}$ are.)

To show that $[D \to D']$ is continuous, we establish first that for $f \in [D \to D']$

$$f = \bigsqcup \overrightarrow{e}[e, \{e'] : e' \ll f(e)\},$$

where e ranges over D and e' over D', and where the function $\overrightarrow{e}[e, e']$ is defined by:

$$\overrightarrow{e}[e, e'](x) = \begin{cases} e' & \text{if } e \ll x, \\ \perp & \text{if not,} \end{cases}$$

for all $x \in D$. Call the function on the right f'. Calculate:

$$f'(x) = \bigsqcup \overrightarrow{e}[e, e'](x) : e' \ll f(e)$$

$$= \bigsqcup\{e' : \exists e \ll x\ [e' \ll f(e)]\}$$

$$= \bigsqcup\{e' : e' \ll f(x) = f(x)\}.$$

With the equation for f proved, note next that for all $g \in [D \to D']$, $e' \ll g(e)$ implies $\overrightarrow{e}[e, e'] \sqsubseteq g$ by an easy pointwise argument. If we let $V = \{g : e' \ll g(e)\}$, we see then that V is open in the product topology and that $\overrightarrow{e}[e, e'] \sqsubseteq \sqcap V$. We may then conclude that $f = \bigsqcup\{\sqcap V : f \in V\}$, which proves both that $[D \to D']$ is a continuous lattice and that the two topologies agree by the remark following 2.4. □

Pointwise $\sqcup$, $\top$, and $\perp$ yield a complete lattice on **`ScottMap D D'`** when D and D' are complete (**`ScottMap.instCompleteLattice`**); directed suprema are computed pointwise (**`isLUB_sSup`**, **`sSupMaps`**). Scott's step functions are **`stepMap e e'`**; **`stepMap.pointwise_sSup`**,

stepMap.wayBelow, and **stepMap.apply_of_wayBelow** formalize $f = \bigsqcup \overrightarrow{e}[e, e']$ (see **stepMap.isContinuousLattice** in Step map $\overrightarrow{e}[e, e']$). The product topology and its agreement with the Scott topology are in Product topology on $[D \to D']$ (**scottMapInducedPiTopology.scottTopology_eq_pointwise**, **scottTopology_eq_inducedPi**).

Theorem (theorem_3_3). If **ContinuousLattice D** and **ContinuousLattice D'**, then **ScottMap D D'** is a continuous lattice and its Scott topology equals **scottMapInducedPiTopology.pointwiseT D D'**.

Proof. theorem_3_3.lean combines **stepMap.isContinuousLattice** and **scottMapInducedPiTopol eq_pointwise**. □

The above theorem might possibly be generalized to $[X \to D]$ where X is merely a T_0-space, but I was unable to see the argument. In any case we are mostly interested in the continuous lattices. Note as a consequence of our proof:

theorem_3_3.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.scottMapInducedPiTopology
import DomainTheory.ContinuousLattice.FunctionSpaces.stepMap

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set Topology TopologicalSpace

variable {D D' : Type*} [CompleteLattice D] [CompleteLattice D']

theorem theorem_3_3 (hD : ContinuousLattice D) (hD' : ContinuousLattice D') :
    ContinuousLattice (ScottMap D D') ∧
      (scottTopologicalSpace : TopologicalSpace (ScottMap D D')) =
        scottMapInducedPiTopology.pointwiseTopology D D' :=
  ⟨stepMap.isContinuousLattice hD hD', scottMapInducedPiTopology.
    scottTopology_eq_pointwise hD hD'⟩

end DomainTheory.ContinuousLattice
```

1.4.9 Corollary 3.4 ✓

3.4 Corollary. For continuous lattices D and D', the evaluation map:

$$\mathrm{eval} : [D \to D'] \times D \to D'$$

is continuous.

Proof: Here $\mathrm{eval}(f, x) = f(x)$. With f fixed, this is obviously continuous. With x fixed, we proved the continuity above with our calculation of $\bigsqcup \mathcal{F}$ in view of 2.5. Hence applying 5.3 and 2.6, we conclude that eval is jointly continuous. □

This result gives only one example of the masses of continuous functions that are available on continuous lattices. As another fundamental example we have:

Namespace **corollary_3_4** collects the evaluation tools; Scott's corollary is assembled from them:

Lemma (`eval_on_C`). For $x \in D$, application at x is continuous as a map **`ScottC D D'`** $\to$ **`D'`** when the function space carries **`scottFunctionTopology`** with Scott topologies on D and D'.

Theorem (`preservesDirectedSup`). Joint evaluation **`(f, x)`** $\mapsto$ **`f(x)`** on **`ScottMap D D'`** $\times$ **`D`** preserves directed suprema (via Propositions 2.5 and 2.6).

Theorem (`jointly_continuous`). The evaluation map **`ScottMap D D'`** $\times$ **`D`** $\to$ **`D'`** is Scott-continuous.

Theorem (`corollary_3_4`). Specialization of **`eval_on_C`** to **`ScottC D D'`** (the x-fixed step in Scott's proof).

corollary_3_4.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottFunctionTopology
import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_6
import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set Topology TopologicalSpace

variable {X Y D D' D'' D₀ D₀' D₁ D₁' : Type*}
variable [TopologicalSpace X] [TopologicalSpace Y]
variable [CompleteLattice D] [CompleteLattice D'] [CompleteLattice D'']
variable [CompleteLattice D₀] [CompleteLattice D₀'] [CompleteLattice D₁] [
    CompleteLattice D₁']

namespace corollary_3_4

theorem eval_on_C (x : D) :
    @Continuous (ScottC D D') D'
      (@scottFunctionTopology D D' scottTopologicalSpace scottTopologicalSpace)
      scottTopologicalSpace (fun f : ScottC D D' => f x) :=
  continuous_def.2 fun _U hU =>
    scottFunctionTopology.subbasis_isOpen_scott (D := D) (D' := D') (x := x) hU

theorem preservesDirectedSup :
    PreservesDirectedSup (fun p : ScottMap D D' × D => (p.1 : D → D') p.2) := by
  rw [proposition_2_6]
  constructor
  · intro y S hS hSdir
    show ((sSup S : ScottMap D D') : D → D') y
        = sSup ((fun x : ScottMap D D' => (x : D → D') y) '' S)
    rw [ScottMap.sSup_apply]
  · intro x
    exact (proposition_2_5 _).mp x.continuous

theorem jointly_continuous :
    @Continuous (ScottMap D D' × D) D' scottTopologicalSpace scottTopologicalSpace
      (fun p : ScottMap D D' × D => (p.1 : D → D') p.2) :=
  PreservesDirectedSup.continuous_of preservesDirectedSup
```

```
end corollary_3_4

theorem corollary_3_4 (x : D) :
    @Continuous (ScottC D D') D'
      (@scottFunctionTopology D D' scottTopologicalSpace scottTopologicalSpace)
      scottTopologicalSpace (fun f : ScottC D D' => f x) :=
  corollary_3_4.eval_on_C x

end DomainTheory.ContinuousLattice
```

1.4.10 Scott functional abstraction ✓

For continuous lattices D, D', and D'', Scott's functional abstraction

$$\mathrm{lambda}(f)(x)(y) = f(x, y)$$

maps $f \in [[D \times D'] \to D'']$ to an element of $[D \to [D' \to D'']]$ (using Theorem 3.3 on nested function spaces). The library names that map **`scottLambda`**.

Definition (`scottLambda.at`). For $f \in$ **`ScottMap (D × D') D″`** and $x \in D$, **`scottLambda.at f x`** is the Scott map $y \mapsto f(x, y)$ in **`ScottMap D' D″`**.

Definition (`scottLambda`). **`scottLambda f`** is the Scott map $x \mapsto$ **`scottLambda.at f x`** in **`ScottMap D (ScottMap D' D″)`**.

On complete lattices, currying uses two pointwise **`sSup`** facts (same file, no separate module):

Lemma (`sSup_image_prod_mk_left`). $\bigsqcup\{\,(x, y) \mid y \in S\,\} = (x, \bigsqcup S)$ for nonempty $S \subseteq D'$.

Lemma (`sSup_image_prod_mk_right`). $\bigsqcup\{\,(x, y) \mid x \in S\,\} = (\bigsqcup S, y)$ for nonempty $S \subseteq D$.

Namespace **`scottLambda`** collects the currying and section tools used to build those maps:

Lemma (`curry_right`). For fixed $x \in D$, the section $y \mapsto f(x, y)$ preserves directed suprema.

Lemma (`curry_left`). For fixed $y \in D'$, the section $x \mapsto f(x, y)$ preserves directed suprema.

Theorem (`outer`). For $f \in$ **`ScottMap (D × D') D″`**, the map $x \mapsto$ **`scottLambda.at f x`** preserves directed suprema.

Lemma (`apply`). **`((scottLambda f x) : ScottMap D' D″) y = f(x,y)`** (definitional).

The map **`scottLambda`** itself (on carriers **`ScottMap (D × D') D″`** and **`ScottMap D (ScottMap D' D″)`**) preserves directed suprema in the function variable; lubs on Scott maps are computed pointwise (Theorem 3.3).

Theorem (`preservesDirectedSup`). **`PreservesDirectedSup scottLambda`** (namespace **`scottLambda`**, scottLambda.lean).

This is the directed-supremum input to Scott continuity of functional abstraction (Proposition 3.5).

scottLambda.lean

```
module

public import DomainTheory.ContinuousLattice.ScottMaps.PreservesDirectedSup

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

open Set Topology TopologicalSpace

variable {X Y D D' D'' D₀ D₀' D₁ D₁' : Type*}

variable [TopologicalSpace X] [TopologicalSpace Y]

variable [CompleteLattice D] [CompleteLattice D'] [CompleteLattice D'']

variable [CompleteLattice D₀] [CompleteLattice D₀'] [CompleteLattice D₁] [
    CompleteLattice D₁']

theorem sSup_image_prod_mk_right (y : D') (S : Set D) (hS : S.Nonempty) :
    sSup (Set.image (fun x => (x, y)) S) = (sSup S, y) := by
  have himage : Set.image (fun x => (x, y)) S = S ×ˢ ({y} : Set D') := by
    ext ⟨a, b⟩
    simp only [Set.mem_image, Set.mem_prod, Set.mem_singleton_iff]
    constructor
    · rintro ⟨x, hx, h⟩
      obtain ⟨ha, hb⟩ := Prod.ext_iff.mp h
      subst ha
      exact ⟨hx, hb.symm⟩
    · rintro ⟨ha, hb⟩
      exact ⟨a, ha, Prod.ext_iff.mpr ⟨rfl, hb.symm⟩⟩
  have hy : sSup ({y} : Set D') = y := by
    apply le_antisymm
    · exact sSup_le fun z hz => by rw [Set.mem_singleton_iff] at hz; rw [hz]
    · exact le_sSup (Set.mem_singleton y)
  rw [himage, sSup_prod (hs := hS) (ht := ⟨y, Set.mem_singleton y⟩), hy]

theorem sSup_image_prod_mk_left (x : D) (S : Set D') (hS : S.Nonempty) :
    sSup (Set.image (fun y => (x, y)) S) = (x, sSup S) := by
  have himage : Set.image (fun y => (x, y)) S = ({x} : Set D) ×ˢ S := by
    ext ⟨a, b⟩
    simp only [Set.mem_image, Set.mem_prod, Set.mem_singleton_iff]
    constructor
    · rintro ⟨y, hy, h⟩
      obtain ⟨ha, hb⟩ := Prod.ext_iff.mp h
      subst hb
      exact ⟨ha.symm, hy⟩
    · rintro ⟨ha, hb⟩
      refine ⟨b, hb, Prod.ext_iff.mpr ⟨ha.symm, rfl⟩⟩
  have hx : sSup ({x} : Set D) = x := by
    apply le_antisymm
    · exact sSup_le fun z hz => by rw [Set.mem_singleton_iff] at hz; rw [hz]
    · exact le_sSup (Set.mem_singleton x)
  rw [himage, sSup_prod (hs := ⟨x, Set.mem_singleton x⟩) (ht := hS), hx]

namespace scottLambda

theorem curry_right (f : ScottMap (D × D') D'') (x : D) :
    PreservesDirectedSup (fun y => f (x, y)) := by
  intro S hS hSdir
  have hS' : DirectedOn (· ≤ ·) (Set.image (fun y => (x, y)) S) := by
    intro p hp q hq
```

```
    obtain ⟨a, ha, rfl⟩ := hp
    obtain ⟨b, hb, rfl⟩ := hq
    obtain ⟨c, hc, hac, hbc⟩ := hSdir a ha b hb
    exact ⟨(x, c), Set.mem_image_of_mem _ hc, And.intro (And.intro le_rfl hac) (And.
    intro le_rfl hbc)⟩
  have hS'ne : (Set.image (fun y => (x, y)) S).Nonempty := by
    obtain ⟨s, hs⟩ := hS
    exact ⟨(x, s), s, hs, rfl⟩
  rw [show (fun y => f (x, y)) (sSup S) = f (x, sSup S) from rfl,
    ← sSup_image_prod_mk_left x S hS,
    f.preservesDirectedSup_coe (Set.image (fun y => (x, y)) S) hS'ne hS']
  congr 1
  simp [Set.image_image]

theorem curry_left (f : ScottMap (D × D') D'') (y : D') :
    PreservesDirectedSup (fun x => f (x, y)) := by
  intro S hS hSdir
  have hS' : DirectedOn (· ≤ ·) (Set.image (fun x => (x, y)) S) := by
    intro p hp q hq
    obtain ⟨a, ha, rfl⟩ := hp
    obtain ⟨b, hb, rfl⟩ := hq
    obtain ⟨c, hc, hac, hbc⟩ := hSdir a ha b hb
    exact ⟨(c, y), Set.mem_image_of_mem _ hc, And.intro (And.intro hac le_rfl) (And.
    intro hbc le_rfl)⟩
  have hS'ne : (Set.image (fun x => (x, y)) S).Nonempty := by
    obtain ⟨s, hs⟩ := hS
    exact ⟨(s, y), s, hs, rfl⟩
  rw [show (fun x => f (x, y)) (sSup S) = f (sSup S, y) from rfl,
    ← sSup_image_prod_mk_right y S hS,
    f.preservesDirectedSup_coe (Set.image (fun x => (x, y)) S) hS'ne hS']
  congr 1
  simp [Set.image_image]

end scottLambda

noncomputable def scottLambda.at (f : ScottMap (D × D') D'') (x : D) : ScottMap D' D''
    :=
  ⟨fun y => f (x, y), PreservesDirectedSup.continuous_of (scottLambda.curry_right f x)⟩

namespace scottLambda

theorem outer (f : ScottMap (D × D') D'') :
    PreservesDirectedSup (fun x => scottLambda.at f x) := by
  intro S hS hSdir
  apply ScottMap.ext
  intro y
  show f (sSup S, y)
      = ((sSup (Set.image (fun x => scottLambda.at f x) S) : ScottMap D' D'') : D' → D
    '') y
  rw [ScottMap.sSup_apply, Set.image_image]
  exact curry_left f y hS hSdir

end scottLambda

noncomputable def scottLambda (f : ScottMap (D × D') D'') : ScottMap D (ScottMap D' D
    '') :=
```

```
  ⟨fun x => scottLambda.at f x,
    PreservesDirectedSup.continuous_of (scottLambda.outer f)⟩

namespace scottLambda

@[simp] theorem apply (f : ScottMap (D × D') D'') (x : D) (y : D') :
    ((scottLambda f x : ScottMap D' D'') : D' → D'') y = (f : (D × D') → D'') (x, y)
    :=
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup
      (scottLambda : ScottMap (D × D') D'' → ScottMap D (ScottMap D' D'')) := by
  intro 𝓕 h𝓕 h𝓕dir
  apply ScottMap.ext
  intro x
  apply ScottMap.ext
  intro y
  rw [apply, ScottMap.sSup_apply, ScottMap.sSup_apply, ScottMap.sSup_apply,
    Set.image_image, Set.image_image]
  congr 1

end scottLambda

end DomainTheory.ContinuousLattice
```

1.4.11 Proposition 3.5 ✓

3.5 Proposition. For continuous lattices D, D', and D'', the map of functional abstraction:

$$\text{lambda} : [[D \times D'] \to D''] \to [D \to [D' \to D'']]$$

is continuous.

Proof: Here lambda is defined by:

$$\text{lambda}(f)(x)(y) = f(x, y)$$

where $f \in [[D \times D'] \to D'']$ and $x \in D$ and $y \in D'$. What is particularly interesting here is that by virtue of 3.3 we are making use of $[D \to [D' \to D'']]$ as a continuous lattice. The principle being stated here can be formulated more broadly in this way:

> If an expression $\mathcal{E}(x, y, z, \dots)$ is continuous in all its variables $x, y, z, \dots$ with values in D' as x ranges in D, then the expression
>
> $$\lambda x : D.\mathcal{E}(x, y, z, \dots)$$
>
> with values in $[D \to D']$ is continuous in the remaining variables $y, z, \dots$.

The λ-notation is a notation for functions, where in the above the variable after the λ is the *argument* and the expression after the . is the *value* (as a function of the argument). Thus we could write:

$$\text{lambda} = \lambda f : [[D \times D'] \to D''].\lambda x : D.\lambda y : D'.f(x, y),$$

and, because $f(x, y)$ is continuous in f, x, and y, our conclusion follows. But often it is more readable not to write equations between functions but rather equations between values for definitional purposes.

The proof of the principle is easy. For let the variable y, say range over D'' and let $S \subseteq D''$ be a directed subset. Then

$$\lambda x : D.\mathcal{E}(x, \bigsqcup S, z, \dots) = \lambda x : D.\bigsqcup \mathcal{E}(x, y, z, \dots) : y \in S \quad = \bigsqcup \lambda x : D.\mathcal{E}(x, y, z, \dots) : y \in S,$$

because the lubs of functions are computed pointwise. □

We need not enumerate the many corollaries that follow easily now from this result. We mention, however, that composition $f \circ g$ of functions (on continuous lattices) is continuous in the two function variables, where we write

$$(f \circ g)(x) = f(g(x)).$$

proposition_3_5.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.scottLambda

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set Topology TopologicalSpace

variable {X Y D D' D'' D₀ D₀' D₁ D₁' : Type*}
variable [TopologicalSpace X] [TopologicalSpace Y]
variable [CompleteLattice D] [CompleteLattice D'] [CompleteLattice D'']
variable [CompleteLattice D₀] [CompleteLattice D₀'] [CompleteLattice D₁] [
    CompleteLattice D₁']

theorem proposition_3_5 :
    @Continuous (ScottMap (D × D') D'') (ScottMap D (ScottMap D' D''))
      scottTopologicalSpace scottTopologicalSpace scottLambda :=
  PreservesDirectedSup.continuous_of scottLambda.preservesDirectedSup

end DomainTheory.ContinuousLattice
```

1.4.12 Retractions and extensions ✓

What will be useful will be to return at this point to a discussion of the injective properties of continuous lattices. If one continuous lattice is a subspace of another it is of course a retract. This relationship between spaces can be given by a pair of continuous maps

$$i : D \to D' \quad \text{and} \quad j : D' \to D,$$

where

$$j \circ i = \mathrm{id}_D = \lambda x : D.x.$$

The composition $i \circ j : D' \to i(D)$ is the retraction onto the subspace corresponding to D under i. Now if we have a diagram:

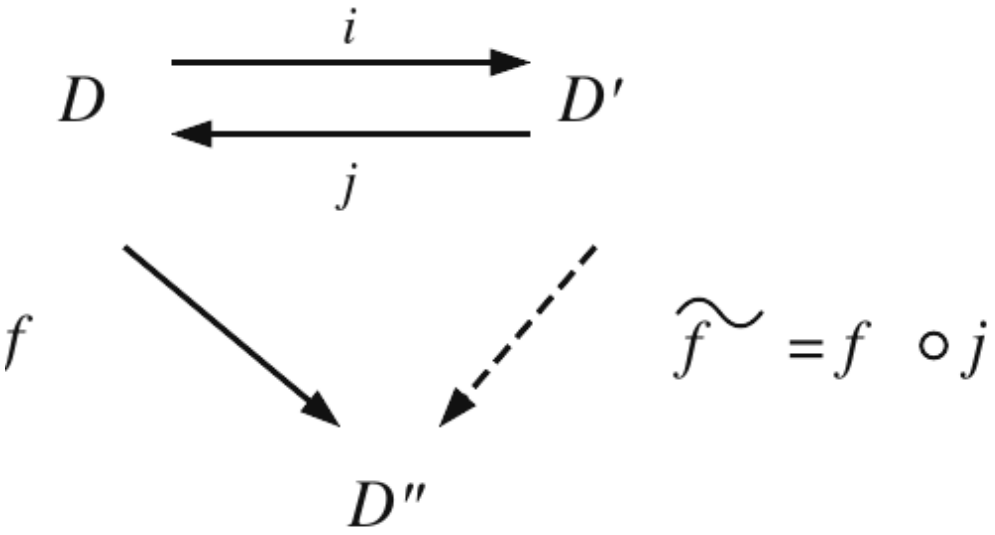

Figure 12: D arrow i to D prime, arrow j back; solid f from D to D double prime; dashed arrow from D prime to D double prime labeled f tilde equals f compose j

the given continuous f is at once extendable from D to D' by the obvious definition of $\tilde{f}$. This $\tilde{f}$ is not the $\bar{f}$ used in the proof of 2.11, and it will be well to sort out the connections. On one side note that if f' is any function which extends f, then we have $f = f' \circ i$. But this implies

$$\tilde{f} = f \circ j = f' \circ i \circ j,$$

which shows that $\tilde{f}$ is a "degraded" version of f'. There is one situation where this type of degrading is especially nice.

Retraction.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap

@[expose] public section

namespace DomainTheory.ContinuousLattice

variable {D₀ D₀' D₁ D₁' : Type*}

variable [CompleteLattice D₀] [CompleteLattice D₀'] [CompleteLattice D₁] [
    CompleteLattice D₁']
```

```
namespace ScottMap

structure retraction (D₀ D₀' D₁ D₁' : Type*)
    [CompleteLattice D₀] [CompleteLattice D₀'] [CompleteLattice D₁] [CompleteLattice D₁
    '] where
  incl : ScottMap D₀ D₁ → ScottMap D₀' D₁'
  retr : ScottMap D₀' D₁' → ScottMap D₀ D₁
  retr_incl : ∀ f, retr (incl f) = f

end ScottMap

end DomainTheory.ContinuousLattice
```

1.4.13 Definition 3.6 ✓

3.6 Definition. A continuous lattice D is said to be a *projection* of a continuous lattice D' iff there are a pair of continuous maps

$$i : D \to D' \quad \text{and} \quad j : D' \to D$$

such that not only

$$j \circ i = \mathrm{id}_D,$$

but also

$$i \circ j \sqsubseteq \mathrm{id}_{D'}.$$

Thus, in case our retraction is a projection, we have $\tilde{f} \sqsubseteq f'$, which means that $\tilde{f}$ is the *minimal* extension of $f \in [D \to D'']$ to a function in $[D' \to D'']$. We will discuss the nature of $\tilde{f}$ in a moment. But before we do we pause to remark that the correspondence $f \rightsquigarrow \tilde{f}$ is *continuous*, and this fact is easily extended.

Projection.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.Retraction
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set Topology TopologicalSpace

variable {D D₀ D₀' D₁ D₁' : Type*}

variable [CompleteLattice D] [CompleteLattice D₀] [CompleteLattice D₀'] [
    CompleteLattice D₁] [CompleteLattice D₁']

namespace ScottMap
```

```
structure projection (D₀ D₀' D₁ D₁' : Type*)
    [CompleteLattice D₀] [CompleteLattice D₀'] [CompleteLattice D₁] [CompleteLattice D₁
    '] extends
    ScottMap.retraction D₀ D₀' D₁ D₁' where
  incl_retr_le : ∀ f' x, (incl (retr f')) x ≤ f' x

noncomputable def conMinContinuousLatticeProjection : ContinuousLatticeProjection D (
    ScottMap D D) where
  incl := ScottMap.con
  retr := ScottMap.min
  retr_incl := fun _ => rfl
  incl_retr_le := fun f => by
    rw [ScottMap.le_def]
    intro y
    show ((ScottMap.const ((f : D → D) ⊥) : ScottMap D D) : D → D) y ≤ (f : D → D) y
    rw [ScottMap.const_apply]
    exact f.monotone bot_le

end ScottMap

end DomainTheory.ContinuousLattice
```

1.4.14 Function-space retraction and projection ✓

When D_n is a retraction (projection) of D'_n via $i_n : D_n \to D'_n$ and $j_n : D'_n \to D_n$, Proposition 3.7 lifts that data to the function spaces $[D_0 \to D_1]$ and $[D'_0 \to D'_1]$. Scott writes the lifted pair as $\vec{i}$ and $\vec{j}$:

$$\vec{i}(f) = i_1 \circ f \circ j_0, \qquad \vec{j}(f') = j_1 \circ f' \circ i_0$$

for $f \in [D_0 \to D_1]$ and $f' \in [D'_0 \to D'_1]$. The formalization packages lattice retractions **`ContinuousLatticeRetraction`** (and projections **`ContinuousLatticeProjection`**) from Continuous lattice retraction and Continuous lattice projection; map-space carriers **`ScottMap.retraction`** and **`ScottMap.projection`** from Retractions and extensions and Definition 3.6.

Definition (`FunctionSpace.retraction`). From **`R0 : ContinuousLatticeRetraction D0 D0'`** and **`R1 : ContinuousLatticeRetraction D1 D1'`**, build **`ScottMap.retraction D0 D0' D1 D1'`** with **`incl f = R1.incl ∘ f ∘ R0.retr`** and **`retr f' = R1.retr ∘ f' ∘ R0.incl`**.

Definition (`FunctionSpace.projection`). From **`P0`** and **`P1`** as continuous lattice projections, the same **`incl`** / **`retr`** formulas on **`ScottMap`**, plus **`incl_retr_le`** from the lattice projection inequalities.

`FunctionSpace.lean`

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.Projection

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set Topology TopologicalSpace
```

```
variable {D₀ D₀' D₁ D₁' : Type*}

variable [CompleteLattice D₀] [CompleteLattice D₀'] [CompleteLattice D₁] [
    CompleteLattice D₁']

namespace FunctionSpace

def retraction (R₀ : ContinuousLatticeRetraction D₀ D₀') (R₁ :
    ContinuousLatticeRetraction D₁ D₁') :
    ScottMap.retraction D₀ D₀' D₁ D₁' where
  incl f := ScottMap.comp R₁.incl (ScottMap.comp f R₀.retr)
  retr f' := ScottMap.comp R₁.retr (ScottMap.comp f' R₀.incl)
  retr_incl f := ScottMap.ext fun x => by simp [ScottMap.comp, R₀.retr_incl, R₁.
    retr_incl]

def projection (P₀ : ContinuousLatticeProjection D₀ D₀') (P₁ :
    ContinuousLatticeProjection D₁ D₁') :
    ScottMap.projection D₀ D₀' D₁ D₁' :=
  ScottMap.projection.mk
    (FunctionSpace.retraction P₀.toContinuousLatticeRetraction P₁.
    toContinuousLatticeRetraction)
    (by
      intro f' y
      dsimp only [FunctionSpace.retraction, ScottMap.comp, Function.comp_def]
      exact le_trans (P₁.incl_retr_le (f' (P₀.incl (P₀.retr y))))
        (ScottMap.monotone f' (P₀.incl_retr_le y)))

end FunctionSpace

end DomainTheory.ContinuousLattice
```

1.4.15 Proposition 3.7 ✓

3.7 Proposition. Suppose the two pairs of maps

$$i_n : D_n \to D'_n \quad \text{and} \quad j_n : D'_n \to D_n$$

for $n = 0, 1$ make D_n a retraction (projection) of D'_n. Then $[D_0 \to D_1]$ is also a retraction (projection) of $[D'_0 \to D'_1]$ by means of the pair of maps:

$$\vec{i}(f) = i_1 \circ f \circ j_0 \text{ , and}$$

$$\vec{j}(f') = j_1 \circ f' \circ i_0 \text{ ,}$$

where $f \in [D_0 \to D_1]$ and $f' \in [D'_0 \to D'_1]$. □

proposition_3_7.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace
```

```
@[expose] public section

namespace DomainTheory.ContinuousLattice

variable {D₀ D₀' D₁ D₁' : Type*}

variable [CompleteLattice D₀] [CompleteLattice D₀'] [CompleteLattice D₁] [
    CompleteLattice D₁']

theorem proposition_3_7 (P₀ : ContinuousLatticeProjection D₀ D₀') (P₁ :
    ContinuousLatticeProjection D₁ D₁') :
    Nonempty (ScottMap.retraction D₀ D₀' D₁ D₁') ∧
    Nonempty (ScottMap.projection D₀ D₀' D₁ D₁') :=
  ⟨⟨FunctionSpace.retraction P₀.toContinuousLatticeRetraction P₁.
    toContinuousLatticeRetraction⟩,
   ⟨FunctionSpace.projection P₀ P₁⟩⟩

end DomainTheory.ContinuousLattice
```

1.4.16 Scott subspace extension ✓

When Y carries the Scott topology and $e : X \to Y$ is a subspace embedding, Scott's **subspace extension** $\bar{f} : Y \to D$ of $f : X \to D$ is built from open neighborhoods of $y \in Y$ and the infima $\sqcap f(e^{-1}(U))$ over $U \ni y$. The formalization lives in `scottSubspaceExtend.lean`.

Definition (`scottSubspaceExtend.inf`). For Scott-open $U \subseteq Y$, `inf e f U` is $\sqcap\{f(x) \mid e(x) \in U\}$.

Definition (`scottSubspaceExtend`). `scottSubspaceExtend e f y` is $\bigsqcup\{d \mid \exists U$ Scott-open, $y \in U,\ d = \inf e\, f\, U\}$.

Namespace **`scottSubspaceExtend`**:

Lemma (`inf_mono`). Monotonicity in the domain map $f \le g$ on X.

Lemma (`inf_eq_of_ext`). Agreement on $e(X)$ implies equal **`inf`**.

Lemma (`inf_eq_of_comp`). Relates **`inf e f U`** to $\sqcap f'(e(X) \cap U)$ when $f' : [Y \to D]$ extends f on $e(X)$.

Lemma (`sInf_image_le_of_subset`). Larger index set lowers **`sInf`** on images.

Lemma (`inf_mono_incl_apply`). For a continuous-lattice projection **`P : D ⇄ D'`**, **`P.incl (inf e f U) ≤ inf e (λ x, P.incl (f x)) U`**.

Lemma (`inf_mono_retr`). For the same **`P`**, **`P.retr (inf e g U) ≤ inf e (λ x, P.retr (g x)) U`**.

Lemma (`inf_mono_incl`). If **`∀ x, f x = P.retr (g x)`** on X, then **`inf e (λ x, P.incl (f x)) U ≤ inf e g U`**.

Lemma (`incl_inf`). Under the same agreement **`f = P.retr ∘ g`** on X, **`P.incl (inf e f U) ≤ inf e g U`** (**`inf_mono_incl_apply`** then **`inf_mono_incl`**).

Lemma (`mono`). / `eq_of_ext`. — for the full extension **`scottSubspaceExtend`**.

Theorem (`maximal`). Any Scott map $f' : Y \to D$ extending f on $e(X)$ satisfies $f'y \le \bar{f}(y)$ (uses **`ScottMap.eq_sSup_openInfs`** from Elements of $[D \to D']$).

`scottSubspaceExtend.lean`

```
module
```

```
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set Topology TopologicalSpace

namespace scottSubspaceExtend

variable {X Y D D' : Type*} [CompleteLattice D] [CompleteLattice D']

noncomputable def inf (e : X → Y) (f : X → D) (U : Set Y) : D :=
  sInf (f '' (e ^-1' U))

theorem inf_mono {e : X → Y} {f g₀ : X → D} (hfg : ∀ x, f x ≤ g₀ x) (U : Set Y) :
    inf e f U ≤ inf e g₀ U := by
  apply le_sInf
  intro d hd
  obtain ⟨x, hxU, rfl⟩ := hd
  exact le_trans (sInf_le ⟨x, hxU, rfl⟩) (hfg x)

theorem inf_eq_of_ext {e : X → Y} {f g' : X → D} (h : ∀ x, f x = g' x) (U : Set Y) :
    inf e f U = inf e g' U := by
  unfold inf
  congr 1
  ext d
  simp [Set.mem_image, Set.mem_preimage, h]

theorem sInf_image_le_of_subset {α : Type*} {f : α → D} {S T : Set α} (hST : S ⊆ T) :
    sInf (f '' T) ≤ sInf (f '' S) :=
  sInf_le_sInf fun _ hd => by
    obtain ⟨s, hs, rfl⟩ := hd
    exact ⟨s, hST hs, rfl⟩

theorem inf_mono_incl_apply {e : X → Y} {f : X → D} (U : Set Y)
    (P : ContinuousLatticeProjection D D') :
    P.incl (inf e f U) ≤ inf e (fun x => P.incl (f x)) U := by
  apply le_sInf
  intro d hd
  obtain ⟨x, hxU, rfl⟩ := hd
  exact P.incl.monotone (sInf_le (Set.mem_image_of_mem f (Set.mem_preimage.mpr hxU)))

theorem inf_mono_retr {e : X → Y} {g : X → D'} (P : ContinuousLatticeProjection D D')
     (U : Set Y) :
    P.retr (inf e g U) ≤ inf e (fun x => P.retr (g x)) U := by
  apply le_sInf
  intro d hd
  obtain ⟨x, hxU, rfl⟩ := hd
  have hx : x ∈ e ^-1' U := Set.mem_preimage.mpr hxU
  exact (P.retr.monotone (sInf_le (Set.mem_image_of_mem g hx))).trans le_rfl

theorem inf_mono_incl {e : X → Y} {f : X → D} {g : X → D'} (P :
    ContinuousLatticeProjection D D')
```

```
    (hfg : ∀ x, f x = P.retr (g x)) (U : Set Y) :
    inf e (fun x => P.incl (f x)) U ≤ inf e g U := by
  apply le_sInf
  intro d hd
  obtain ⟨x, hxU, rfl⟩ := hd
  have hx : x ∈ e ^-1' U := Set.mem_preimage.mpr hxU
  have hmem : P.incl (f x) ∈ (fun x => P.incl (f x)) '' (e ^-1' U) :=
    Set.mem_image_of_mem _ hx
  have hincl : P.incl (f x) ≤ g x := by rw [hfg x]; exact P.incl_retr_le (g x)
  exact le_trans (sInf_le hmem) hincl

theorem incl_inf {e : X → Y} (P : ContinuousLatticeProjection D D')
    {f : X → D} {g : X → D'} (hfg : ∀ x, f x = P.retr (g x)) (U : Set Y) :
    P.incl (inf e f U) ≤ inf e g U :=
  le_trans (inf_mono_incl_apply (e := e) (f := f) U P)
    (inf_mono_incl (e := e) (f := f) (g := g) P hfg U)

section inf_eq_of_comp

variable [CompleteLattice Y]

theorem inf_eq_of_comp {e : X → Y} {f : X → D} {U : Set Y} (f' : ScottMap Y D)
    (h : ∀ x, f' (e x) = f x) :
    inf e f U = sInf (Set.image (f' : Y → D) (Set.image e Set.univ ∩ U)) := by
  have hset : f '' (e ^-1' U) = Set.image (f' : Y → D) (Set.image e Set.univ ∩ U) :=
    by
    ext d
    simp only [Set.mem_image, Set.mem_preimage, Set.mem_inter_iff, Set.mem_univ,
    true_and]
    constructor
    · rintro ⟨x, hxU, heq⟩
      refine ⟨e x, ⟨?_, hxU⟩, ?_⟩
      · exact ⟨x, rfl⟩
      · rw [h x, heq]
    · rintro ⟨y, ⟨hex, hyU⟩, heq⟩
      obtain ⟨x, _, rfl⟩ := hex
      exact ⟨x, hyU, (h x).symm.trans heq⟩
  rw [inf, hset]

end inf_eq_of_comp

end scottSubspaceExtend

variable {X Y : Type*} [CompleteLattice Y]
variable {D : Type*} [CompleteLattice D]

noncomputable def scottSubspaceExtend (e : X → Y) (f : X → D) (y : Y) : D :=
  sSup { d | ∃ U, @IsOpen Y scottTopologicalSpace U ∧ y ∈ U ∧ d = scottSubspaceExtend.
    inf e f U }

namespace scottSubspaceExtend

theorem mono {e : X → Y} {f g₀ : X → D} (hfg : ∀ x, f x ≤ g₀ x) (y : Y) :
    scottSubspaceExtend e f y ≤ scottSubspaceExtend e g₀ y := by
  unfold scottSubspaceExtend
  apply sSup_le
```

```
  intro d hd
  obtain ⟨U, hUopen, hyU, rfl⟩ := hd
  have hmem : inf e g₀ U ∈
      { d | ∃ U, @IsOpen Y scottTopologicalSpace U ∧ y ∈ U ∧ d = inf e g₀ U } :=
    ⟨U, hUopen, hyU, rfl⟩
  exact le_trans (inf_mono hfg U) (le_sSup hmem)

theorem eq_of_ext {e : X → Y} {f g' : X → D} (h : ∀ x, f x = g' x) (y : Y) :
    scottSubspaceExtend e f y = scottSubspaceExtend e g' y := by
  unfold scottSubspaceExtend
  congr 1
  ext d
  simp [Set.mem_ofPred_eq, inf_eq_of_ext h]

variable [TopologicalSpace X] [TopologicalSpace Y]

theorem maximal (hD : ContinuousLattice D) (e : X → Y) (_he : IsEmbedding e) (f : X →
    D)
    (f' : ScottMap Y D) (h_ext : ∀ x, f' (e x) = f x) (y : Y) :
    (f' : Y → D) y ≤ scottSubspaceExtend e f y := by
  have hEq := ScottMap.eq_sSup_openInfs hD f' y
  have hmain :
      sSup { d | ∃ U, @IsOpen Y scottTopologicalSpace U ∧ y ∈ U ∧
        d = sInf (Set.image (f' : Y → D) U) } ≤ scottSubspaceExtend e f y := by
    unfold scottSubspaceExtend
    apply sSup_le
    intro d hd
    obtain ⟨U, hUopen, hyU, rfl⟩ := hd
    have hmem : inf e f U ∈
        { d | ∃ U, @IsOpen Y scottTopologicalSpace U ∧ y ∈ U ∧ d = inf e f U } :=
      ⟨U, hUopen, hyU, rfl⟩
    refine le_trans ?_ (le_sSup hmem)
    have hrestrict :
        sInf (Set.image (f' : Y → D) U) ≤
          sInf (Set.image (f' : Y → D) (Set.image e Set.univ ∩ U)) :=
      sInf_image_le_of_subset
        (show Set.image e Set.univ ∩ U ⊆ U from inter_subset_right)
    refine le_trans hrestrict (le_of_eq (inf_eq_of_comp (f' := f') h_ext).symm)
  exact le_trans (le_of_eq hEq) hmain

end scottSubspaceExtend

end DomainTheory.ContinuousLattice
```

1.4.17 Proposition 3.8 ✓

Returning now to $\bar{f}$ we can prove:

3.8 Proposition. If D is a continuous lattice and $e : X \to Y$ a subspace embedding, then for each $f : X \to D$, the function $\bar{f} : Y \to D$ given by the formula

$$\bar{f}(y) = \bigsqcup\{\sqcap f(x) : e(x) \in U : y \in U\},$$

where U ranges over open subsets of Y and x over X, is the maximal extension of f to a function in the partially ordered set $[Y \to D]$.

Proof: We are saying that $\bar{f}$ is the maximal solution to the equation

$$f = \bar{f} \circ e.$$

We already know it is a solution, so let f' be any other. We have

$$f'(y) = \bigsqcup \sqcap f'(z) : z \in U : y \in U \quad \sqsubseteq \bigsqcup \sqcap f'(z) : z \in e(X) \cap U : y \in U = \bigsqcup \sqcap f'(e(x)) : e(x) \in U : y \in U \quad = \bigsqcup \{\sqcap$$

which establishes that $f' \sqsubseteq \bar{f}$. $\square$

By the same argument we could show that $\bar{f}$ is the maximal solution of $\bar{f} \circ e \sqsubseteq f$. An interesting question is whether the correspondence $f \rightsquigarrow \bar{f}$ is continuous. I very much doubt it, but at this moment a counterexample escapes me. It is clear that the correspondence is monotonic, for if $f \sqsubseteq g$, then the formula of 3.8 shows that $\bar{f} \sqsubseteq \bar{g}$. This gives us a neat argument for the previous remark: if $g \circ e \sqsubseteq f$, then

$$\overline{g \circ e} \sqsubseteq \bar{f}.$$

But $g \circ e = \overline{g \circ e} \circ e$, so by 3.8, $g \sqsubseteq \overline{g \circ e}$, and $\bar{f}$ is thus maximal.

In the case that the range spaces are being extended, the following lemma relating the extensions will be very useful when we consider inverse limits.

proposition_3_8.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.Constructions.scottExtend
import DomainTheory.ContinuousLattice.Constructions.scottExtend_continuous
import DomainTheory.ContinuousLattice.Constructions.scottExtend_eq_of_continuous
import DomainTheory.ContinuousLattice.Constructions.scottExtend_maximal

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

variable {D : Type*} [CompleteLattice D]

section InjectiveExtension

variable {X Y : Type*} [TopologicalSpace X] [TopologicalSpace Y] {E : Type*} [
    CompleteLattice E]

theorem proposition_3_8 (hE : ContinuousLattice E) (e : X → Y) (he : IsEmbedding e)
    (f : X → E) (hf : @Continuous X E _ scottTopologicalSpace f) :
    @Continuous Y E _ scottTopologicalSpace (scottExtend e f)
      ∧ (∀ x, scottExtend e f (e x) = f x)
      ∧ (∀ f' : Y → E, @Continuous Y E _ scottTopologicalSpace f' → (∀ x, f' (e x) =
    f x) →
          ∀ y, f' y ≤ scottExtend e f y) :=
  ⟨scottExtend_continuous hE e f,
   fun x => scottExtend_eq_of_continuous hE e he f hf x,
   fun _f' hf' h_ext y => scottExtend_maximal hE e hf' h_ext y⟩
```

```
end InjectiveExtension
end DomainTheory.ContinuousLattice
```

1.4.18 Lemma 3.9 ✓

3.9 Lemma. Consider the diagram:

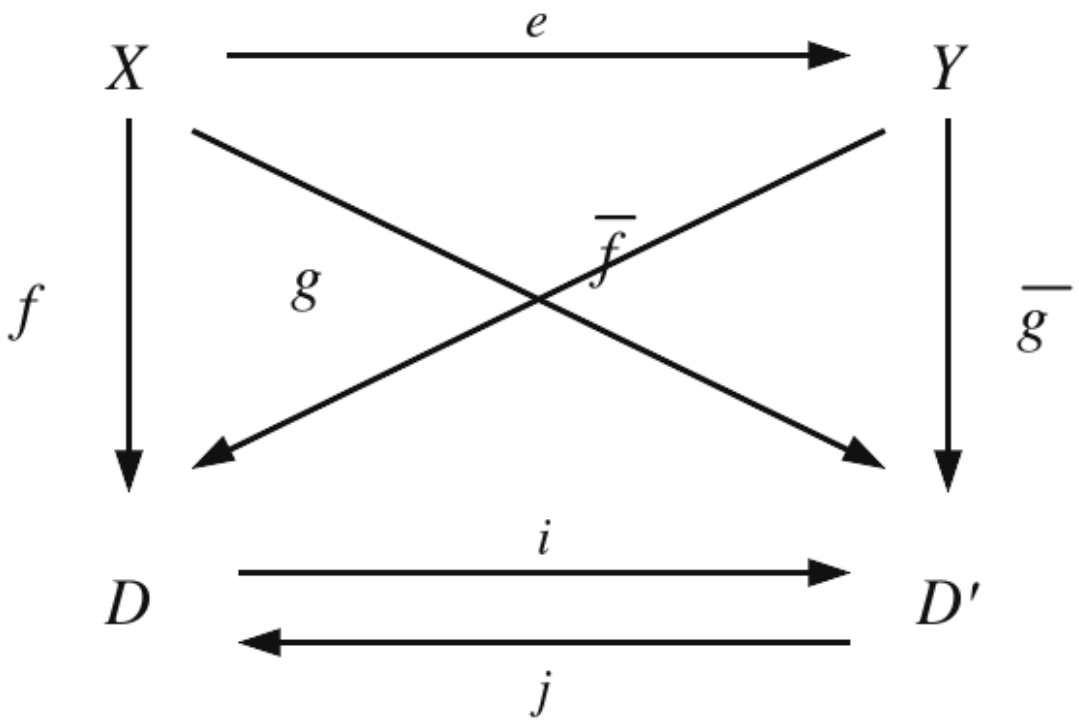

Figure 13: Lemma 3.9 diagram. Top: X to Y by e. Left: f down to D. Right: g bar down to D prime. Diagonals cross: g from X to D prime, f bar from Y to D. Bottom: i from D to D prime and j back.

where the upper row is a subspace embedding and the lower is a projection. If the given functions f and g are extended to $\bar{f}$ and $\bar{g}$ as in 3.8, and if $f = j \circ g$, then $\bar{f} = j \circ \bar{g}$ also.

Proof: $\bar{f}$ and $\bar{g}$ are maximal solutions of $f = \bar{f} \circ e$ and $g = \bar{g} \circ e$. Therefore since

$$f = j \circ g = j \circ \bar{g} \circ e,$$

we see that

$$j \circ \bar{g} \sqsubseteq \bar{f}.$$

Note also that

$$i \circ \bar{f} \circ e = i \circ f = i \circ j \circ g \sqsubseteq g,$$

and so by the remark following 3.8, we have

$$i \circ \bar{f} \sqsubseteq \bar{g}.$$

Therefore

$$\bar{f} = j \circ i \circ \bar{f} \sqsubseteq j \circ \bar{g},$$

which proves the equality. □

Whether this lemma is true for retractions in any form, I do not know. My proof seems to require the stronger projection relationship. I suspect there may be difficulties. In general projections are better behaved than retractions. By the way the word projection seems to be properly used in 3.6, for the projection $j : D \times D' \to D$ of the Cartesian product of two continuous lattices onto the first factor *is* a projection with partial inverse $i : D \to D \times D'$ defined by

$$i(x) = (x, \bot)$$

for $x \in D$.

lemma_3_9.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection
public import DomainTheory.ContinuousLattice.Constructions.scottExtend
import DomainTheory.ContinuousLattice.Constructions.scottExtend_continuous
import DomainTheory.ContinuousLattice.Constructions.scottExtend_eq_of_continuous
import DomainTheory.ContinuousLattice.Constructions.scottExtend_maximal
import DomainTheory.ContinuousLattice.Constructions.scottExtend_maximal_le

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Topology Set

section Lemma39

variable {X Y D D' : Type*} [TopologicalSpace X] [TopologicalSpace Y]
  [CompleteLattice D] [CompleteLattice D']

theorem lemma_3_9 (hD : ContinuousLattice D) (hD' : ContinuousLattice D')
    (P : ContinuousLatticeProjection D D') (e : X → Y) (he : IsEmbedding e)
    {f : X → D} {g : X → D'} (hf : @Continuous X D _ scottTopologicalSpace f)
    (hg : @Continuous X D' _ scottTopologicalSpace g)
    (hfg : ∀ x, f x = (P.retr : D' → D) (g x)) (y : Y) :
    scottExtend e f y = (P.retr : D' → D) (scottExtend e g y) := by
  have hfbar : @Continuous Y D _ scottTopologicalSpace (scottExtend e f) :=
    scottExtend_continuous hD e f
  have hgbar : @Continuous Y D' _ scottTopologicalSpace (scottExtend e g) :=
    scottExtend_continuous hD' e g

  have hjg : @Continuous Y D _ scottTopologicalSpace (fun z => (P.retr : D' → D) (
    scottExtend e g z)) := by
```

```
    let : TopologicalSpace D := scottTopologicalSpace
    let : TopologicalSpace D' := scottTopologicalSpace
    exact P.retr.continuous.comp hgbar
  have hif : @Continuous Y D' _ scottTopologicalSpace (fun z => (P.incl : D → D') (
    scottExtend e f z)) := by
    let : TopologicalSpace D := scottTopologicalSpace
    let : TopologicalSpace D' := scottTopologicalSpace
    exact P.incl.continuous.comp hfbar

  have hA : ∀ z, (P.retr : D' → D) (scottExtend e g z) ≤ scottExtend e f z := by
    intro z
    refine scottExtend_maximal hD e hjg ?_ z
    intro x
    show (P.retr : D' → D) (scottExtend e g (e x)) = f x
    rw [scottExtend_eq_of_continuous hD' e he g hg x, ← hfg x]

  have hB : ∀ z, (P.incl : D → D') (scottExtend e f z) ≤ scottExtend e g z := by
    intro z
    refine scottExtend_maximal_le hD' e hif ?_ z
    intro x
    show (P.incl : D → D') (scottExtend e f (e x)) ≤ g x
    rw [scottExtend_eq_of_continuous hD e he f hf x, hfg x]
    exact P.incl_retr_le (g x)
  refine le_antisymm ?_ (hA y)
  calc scottExtend e f y
      = (P.retr : D' → D) ((P.incl : D → D') (scottExtend e f y)) :=
        (P.retr_incl (scottExtend e f y)).symm
    _ ≤ (P.retr : D' → D) (scottExtend e g y) := P.retr.monotone (hB y)

end Lemma39
end DomainTheory.ContinuousLattice
```

1.4.19 Proposition 3.10 ✓

3.10 Proposition. If the continuous lattice D is a projection of the continuous lattice D' via the pair of maps i, j; then for all $S \subseteq D$ and all $x, y \in D$ we have:

(i) $i(\bigsqcup S) = \bigsqcup\{i(x) : x \in S\}$,

(ii) $i(x) = i(y)$ implies $x = y$,

(iii) $x \ll y$ implies $i(x) \ll i(y)$.

Conversely, if a map $i : D \to D'$ satisfies (i)–(iii), then there exists a continuous $j : D' \to D$ making D a projection of D', and in fact j is uniquely determined by:

(iv) $j(x') = \bigsqcup\{x \in D : i(x) \sqsubseteq x'\}$

for all $x' \in D'$.

Proof: Equation (i) holds for directed $S \subseteq D$ because i is continuous. To have it hold for arbitrary S it is only necessary to check it for finite sets, because every lub is the directed lub of finite sublubs. (The last word of that sentence is an unfortunate accident.) Further, to check the equation for finite sets it is enough

to check it for the empty set and for two element sets. Thus, $i(\bot) = \bot$, because $j(i(\bot)) = \bot$ and since $\bot \sqsubseteq i(\bot)$,

$$j(\bot) \sqsubseteq j(i(\bot)) = \bot,$$

so $j(\bot) = \bot$. Whence $i(\bot) = i(j(\bot)) \sqsubseteq \bot$. Next $i(x \sqcup y) = i(x) \sqcup i(y)$, because first

$$i(x) \sqcup i(y) \sqsubseteq i(x \sqcup y)$$

by monotonicity. Then note that

$$i(x) \sqsubseteq i(x) \sqcup i(y)$$

and so

$$x = j(i(x)) \sqsubseteq j(i(x) \sqcup i(y)).$$

Similarly

$$y \sqsubseteq j(i(x) \sqcup i(y)),$$

whence

$$x \sqcup y \sqsubseteq j(i(x) \sqcup i(y)).$$

But then

$$i(x \sqcup y) \sqsubseteq i(j(i(x) \sqcup i(y))) \sqsubseteq i(x) \sqcup i(y),$$

which completes the argument for equation (i).

Condition (ii) is obvious. For (iii) we argue as follows. Assume $x \ll y$. Since D' is continuous we can write:

$$i(y) = \bigsqcup \{z' \in D' : z' \ll i(y)\},$$

and conclude by the continuity of j that:

$$y = j(i(y)) = \bigsqcup j(z') : z' \ll i(y).$$

But $x \ll y$, so $x \ll j(z')$ for some $z' \ll i(y)$. Now $x \sqsubseteq j(z')$ follows; therefore $i(x) \sqsubseteq i(j(z')) \sqsubseteq z'$. Thus $i(x) \ll i(y)$.

Turning now to the converse, assume of the map i that it satisfies (i)–(iii). Compute:

$$i(j(x')) = \bigsqcup i(x) : i(x) \sqsubseteq x' \sqsubseteq x'.$$

This is correct because i is continuous and the set $\{x : i(x) \sqsubseteq x'\}$ is directed in view of condition (i). Thus $i \circ j \sqsubseteq \mathrm{id}_{D'}$. Note that by virtue of (i) and (ii) it is the case that

$$i(x) \sqsubseteq i(y) \text{ implies } x \sqsubseteq y.$$

(The reason is that $x \sqsubseteq y$ is equivalent to $x \sqcup y = y$.) This remark allows us to compute:

$$j(i(y)) = \bigsqcup\{x : i(x) \sqsubseteq i(y)\}$$
$$= \bigsqcup\{x : x \sqsubseteq y = y\}.$$

Hence, $j \circ i = \mathrm{id}_D$. It remains to show that j is continuous. Suppose $S' \subseteq D'$ is directed. Since j is by definition monotonic, it is sufficient to prove that

$$j(\bigsqcup S') \sqsubseteq \bigsqcup j(x') : x' \in S'.$$

Now

$$j(\bigsqcup S') = \bigsqcup\{x : i(x) \sqsubseteq \bigsqcup S'\},$$

so suppose $i(x) \sqsubseteq \bigsqcup S'$. Let $z \ll x$; whence $i(z) \ll i(x)$. Thus $i(z) \ll x'$ for some $x' \in S'$, and therefore $i(z) \sqsubseteq x'$. We obtain then $z \sqsubseteq j(x')$, which means that

$$z \sqsubseteq \bigsqcup j(x') : x' \in S'$$

holds for all $z \ll x$. By the continuity of D we conclude

$$x \sqsubseteq \bigsqcup j(x') : x' \in S'$$

holds for all x with $i(x) \sqsubseteq \bigsqcup S'$. The desired result follows. □

As a corollary of 3.10 we can easily see which *subspaces* of a continuous lattice D' are projections of it. Such a subspace $D \subseteq D'$ must first be closed under $\bigsqcup$. That is, if $S \subseteq D$, then $\bigsqcup S \in D$ for

all S, where the lub is taken in the sense of D'. The identity map on D will then satisfy (i) and (ii). But this is not enough, since we would not know that D is a continuous lattice, nor whether (iii) holds. The following additional condition would be sufficient, if assumed for all $y \in D$:

$$y = \bigsqcup\{x \in D : x \ll y\},$$

where $\ll$ is taken in the sense of D'. This implies that

$$y = \bigsqcup\{\sqcap(D \cap U) : y \in U\}$$

where U ranges over the open subsets of D' and where the $\sqcap$ is taken in the sense of D. This condition makes the subspace topology the same as the lattice topology on D and besides makes D continuous, which is just what we need. (Another way to put it is that whenever $z \ll y$, where $y \in D$ but $z \in D'$, then $z \sqsubseteq x \ll y$, for some $x \in D$.)

It seems a bit troublesome to characterize in a simple way just which maps $j : D' \to D$ are projections. (Other than saying outright that the map $i : D \to D'$ such that for all $x \in D$:

$$i(x) = \sqcap\{x' \in D' : x \sqsubseteq j(x')\}$$

is the continuous partial inverse to j.) But we can say very easily which continuous maps $j : D' \to D'$ are projections onto *subspaces*; namely, we must have

$$j = j \circ j \sqsubseteq \mathrm{id}.$$

The subspace in question then is:

$$D = \{x \in D' : j(x) = x\}.$$

This non-empty subspace is the exact range of j and is closed under $\bigsqcup$. Let $y \in D$. Then if $x' \ll y$ in D', we find $j(x') \sqsubseteq x' \ll y$. Thus since

$$y = \bigsqcup\{x' \in D' : x' \ll y\},$$

we see that

$$y = j(y) = \bigsqcup\{j(x') : x' \ll y\}.$$

But each $j(x') \in D$, so $y = \bigsqcup\{x \in D : x \ll y\}$, as desired.

The foregoing discussion suggests looking more closely at the space of all projections of a continuous lattice since they are so easily characterized.

proposition_3_10.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection
public import DomainTheory.ContinuousLattice.FunctionSpaces.ConverseProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

variable {D D' : Type*} [CompleteLattice D] [CompleteLattice D']

theorem proposition_3_10 (hD : ContinuousLattice D) (hD' : ContinuousLattice D') (i :
    D → D') :
    ((∀ S : Set D, i (sSup S) = sSup (Set.image i S))
      ∧ Function.Injective i
      ∧ (∀ x y : D, x ≪ y → i x ≪ i y))
      ↔
    (∃ P : ContinuousLatticeProjection D D',
      (∀ d, (P.incl : D → D') d = i d)
        ∧ (∀ x', (P.retr : D' → D) x' = sSup { x | i x ≤ x' })) := by
  constructor
  · rintro ⟨hi, hinj, hwb⟩
    refine ⟨ConverseProjection i hi hinj
      (fun {x y} h => hwb x y h) hD, fun _ => rfl, fun _ => rfl⟩
  · rintro ⟨P, hincl, _⟩
    refine ⟨?_, ?_, ?_⟩
    · intro S
      rw [← hincl (sSup S), P.incl_sSup]
      congr 1
      ext y
      simp [Set.mem_image, hincl]
    · intro x y h
```

```
      have h' : (P.incl : D → D') x = (P.incl : D → D') y := by rw [hincl x, hincl y,
     h]
      exact P.incl_injective h'
    · intro x y h
      rw [← hincl x, ← hincl y]
      exact P.incl_wayBelow hD' h

end DomainTheory.ContinuousLattice
```

1.4.20 Definition 3.11: Projection space ✓

3.11 Definition. Given a continuous lattice D, we let the space of projections be denoted by:

$$J_D = j \in [D \to \{D] : j = j \circ j \sqsubseteq \mathrm{id}\}.$$

The formalization is ProjectionSpace.lean. **`ProjectionSpace D`** is Scott's J_D; **`ProjectionSpace.mem j`** is membership.

Lemma (`iff`). **`mem j`** iff idempotence and **`j x ≤ x`** pointwise on the coercion.

Lemma (`bot_mem`). $\bot \in$ **`J_D`**.

Lemma (`sup_mem`). / **`finsetSup_mem`**. / **`directedSup_mem`**. / **`sSup_mem`**. — **`mem`** is closed under finite and arbitrary sups in **`[D → D]`**.

Instance (`instSupSet`). / **`isLUB_sSup`**. / **`instCompleteLattice`**. — **`ProjectionSpace D`** is a complete lattice (Proposition 3.12).

ProjectionSpace.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection
public import Mathlib.Data.Finset.Basic

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

variable {D : Type*} [CompleteLattice D]

namespace ProjectionSpace

/-- Scott's Def. 3.11: $j \in [D \to D]$ with $j \circ j = j$ and $j \sqsubseteq \
    mathrm{id}$. -/
def mem (j : ScottMap D D) : Prop :=
  j.comp j = j ∧ j ≤ ScottMap.idMap

theorem iff {j : ScottMap D D} :
    mem j ↔ (∀ x, (j : D → D) (j x) = j x) ∧ (∀ x, (j : D → D) x ≤ x) := by
  constructor
  · rintro ⟨hidem, hle⟩
    refine ⟨fun x => ?_, fun x => ?_⟩
```

```
    · have h : ((j.comp j : ScottMap D D) : D → D) x = (j : D → D) x := by rw [hidem]
      rwa [ScottMap.comp_apply] at h
    · have h := (ScottMap.le_def.mp hle) x
      rwa [ScottMap.idMap_apply] at h
  · rintro ⟨hidem, hle⟩
    exact ⟨ScottMap.ext fun x => by rw [ScottMap.comp_apply]; exact hidem x,
      ScottMap.le_def.mpr fun x => by rw [ScottMap.idMap_apply]; exact hle x⟩

theorem bot_mem : mem (⊥ : ScottMap D D) := by
  rw [iff]
  refine ⟨fun x => ?_, fun x => ?_⟩
  · simp only [ScottMap.bot_apply]
  · rw [ScottMap.bot_apply]; exact bot_le

theorem sup_mem {j k : ScottMap D D} (hj : mem j) (hk : mem k) : mem (j ⊔ k) := by
  rw [iff] at hj hk ⊢
  obtain ⟨hjidem, hjle⟩ := hj
  obtain ⟨hkidem, hkle⟩ := hk
  refine ⟨fun x => ?_, fun x => ?_⟩
  · have hjkle : (j : D → D) x ⊔ k x ≤ x := sup_le (hjle x) (hkle x)
    have hj_eq : (j : D → D) (j x ⊔ k x) = j x :=
      le_antisymm (j.monotone hjkle) (le_of_eq_of_le (hjidem x).symm (j.monotone
    le_sup_left))
    have hk_eq : (k : D → D) (j x ⊔ k x) = k x :=
      le_antisymm (k.monotone hjkle) (le_of_eq_of_le (hkidem x).symm (k.monotone
    le_sup_right))
    rw [ScottMap.sup_apply, ScottMap.sup_apply, hj_eq, hk_eq]
  · rw [ScottMap.sup_apply]; exact sup_le (hjle x) (hkle x)

theorem directedSup_mem {S : Set (ScottMap D D)} (hSne : S.Nonempty)
    (hSdir : DirectedOn (· ≤ ·) S) (hS : ∀ j ∈ S, mem j) : mem (sSup S) := by
  have hidem : ∀ j ∈ S, ∀ x, (j : D → D) (j x) = j x := fun j hj => (iff.mp (hS j hj))
    .1
  have hle : ∀ j ∈ S, ∀ x, (j : D → D) x ≤ x := fun j hj => (iff.mp (hS j hj)).2
  rw [iff]
  refine ⟨fun x => ?_, fun x => ?_⟩
  · set A := Set.image (fun j : ScottMap D D => (j : D → D) x) S with hA
    have hAne : A.Nonempty := hSne.image _
    have hAdir : DirectedOn (· ≤ ·) A := by
      rintro _ ⟨j, hj, rfl⟩ _ ⟨k, hk, rfl⟩
      obtain ⟨m, hm, hjm, hkm⟩ := hSdir j hj k hk
      exact ⟨(m : D → D) x, Set.mem_image_of_mem _ hm, hjm x, hkm x⟩
    have hsSx : ((sSup S : ScottMap D D) : D → D) x = sSup A := ScottMap.sSup_apply S
    x
    apply le_antisymm
    · rw [hsSx, ScottMap.sSup_apply]
      refine sSup_le ?_
      rintro _ ⟨k, hk, rfl⟩
      show (k : D → D) (sSup A) ≤ sSup A
      rw [k.preservesDirectedSup_coe A hAne hAdir]
      refine sSup_le ?_
      rintro _ ⟨_, ⟨j, hj, rfl⟩, rfl⟩
      obtain ⟨m, hm, hjm, hkm⟩ := hSdir j hj k hk
      calc (k : D → D) (j x) ≤ (m : D → D) (j x) := hkm (j x)
        _ ≤ (m : D → D) (m x) := m.monotone (hjm x)
        _ = (m : D → D) x := hidem m hm x
```

```
        _ ≤ sSup A := le_sSup (Set.mem_image_of_mem _ hm)
    · rw [hsSx, ScottMap.sSup_apply]
      refine sSup_le ?_
      rintro _ ⟨j, hj, rfl⟩
      have hjxA : (j : D → D) x ≤ sSup A := le_sSup (Set.mem_image_of_mem _ hj)
      calc (j : D → D) x = (j : D → D) (j x) := (hidem j hj x).symm
        _ ≤ (j : D → D) (sSup A) := j.monotone hjxA
        _ ≤ sSup (Set.image (fun f : ScottMap D D => (f : D → D) (sSup A)) S) :=
              le_sSup (Set.mem_image_of_mem _ hj)
  · rw [ScottMap.sSup_apply]
    refine sSup_le ?_
    rintro _ ⟨j, hj, rfl⟩
    exact hle j hj x

theorem finsetSup_mem {T : Finset (ScottMap D D)} (hT : ∀ j ∈ T, mem j) :
    mem (T.sup id) :=
  Finset.sup_induction bot_mem (fun _ ha _ hb => sup_mem ha hb) hT

theorem sSup_mem {T : Set (ScottMap D D)} (hT : ∀ j ∈ T, mem j) : mem (sSup T) := by
  rw [ContinuousLatticeProjection.sSup_finsetSupOf T]
  refine directedSup_mem ⟨⊥, ∅, by simp, by simp⟩
    (ContinuousLatticeProjection.directedOn_finsetSupOf T) ?_
  rintro z ⟨F, hF, rfl⟩
  exact finsetSup_mem fun j hj => hT j (hF j hj)

end ProjectionSpace

/-- Scott's projection space $J_D$ (Definition 3.11). -/
abbrev ProjectionSpace (D : Type*) [CompleteLattice D] : Type _ :=
  { j : ScottMap D D // ProjectionSpace.mem j }

namespace ProjectionSpace

noncomputable instance instSupSet : SupSet (ProjectionSpace D) :=
  ⟨fun T => ⟨sSup (Set.image Subtype.val T), sSup_mem (by rintro j ⟨p, _, rfl⟩; exact p
    .2)⟩⟩

theorem isLUB_sSup (T : Set (ProjectionSpace D)) : IsLUB T (sSup T) := by
  constructor
  · intro p hp
    apply Subtype.coe_le_coe.mp
    show (p : ScottMap D D) ≤ ((sSup T : ProjectionSpace D) : ScottMap D D)
    exact le_sSup (Set.mem_image_of_mem _ hp)
  · intro q hq
    apply Subtype.coe_le_coe.mp
    show ((sSup T : ProjectionSpace D) : ScottMap D D) ≤ (q : ScottMap D D)
    refine sSup_le ?_
    rintro _ ⟨p, hp, rfl⟩
    exact Subtype.coe_le_coe.mpr (hq hp)

noncomputable instance instCompleteLattice : CompleteLattice (ProjectionSpace D) :=
  completeLatticeOfSup (ProjectionSpace D) isLUB_sSup

end ProjectionSpace

end DomainTheory.ContinuousLattice
```

1.4.21 Proposition 3.12 ✓

3.12 Proposition. For a continuous lattice D the space J_D of projections forms a complete lattice as a $\bigsqcup$-closed subspace of $[D \to D]$.

Proof: The constant function $\bot \in J_D$ obviously, so J_D contains $\bigsqcup \emptyset$. Suppose $j, k \in J_D$. We wish to show that $j \sqcup k \in J_D$. Compute:

$$(j \sqcup k)((j \sqcup k)(x)) = j(j(x) \sqcup k(x)) \sqcup k(j(x) \sqcup k(x)).$$

But note:

$$j(x) \sqsubseteq j(j(x)) \sqsubseteq j(j(x) \sqcup k(x)) \sqsubseteq j(x),$$

because $j(x) \sqcup k(x) \sqsubseteq x$. Similarly for $k(x)$. Therefore, we find that $(j \sqcup k) \circ (j \sqcup k) = j \sqcup k \sqsubseteq \mathrm{id}$.

Suppose finally that $S \subseteq J_D$ is directed. We wish to show that $\bigsqcup S \in J_D$. Clearly $\bigsqcup S \sqsubseteq \mathrm{id}$, so compute by continuity of $\circ$:

$$\bigsqcup S \circ \bigsqcup S = \bigsqcup\{j \circ j : j \in S\} = \bigsqcup\{j : j \in S\} = \bigsqcup S.$$

It follows that J_D is $\bigsqcup$-closed and hence is a complete lattice. □

The significance of the above result becomes clearer if we consider the connection between projections and subspaces. Let us write:

$$D(j) = \{x \in D : j(x) = x\}.$$

For $j \in J_D$, each $D(j)$ is a projection of D onto a subspace. We show first that

$$j \sqsubseteq k \quad \text{iff} \quad D(j) \subseteq D(k).$$

Because if $j \sqsubseteq k$, then $j \sqsubseteq j \circ j \sqsubseteq k \circ j \sqsubseteq \mathrm{id} \circ j = j$. Therefore if $j(x) = x$, then $k(x) = k(j(x)) = j(x) = x$, which means that $D(j) \subseteq D(k)$. On the other hand, if $D(j) \subseteq D(k)$, then since $j(D) \subseteq D(j)$, we see that $k \circ j = j$, and so $j \sqsubseteq k \circ \mathrm{id} = k$. Hence J_D is isomorphic to the partially ordered set of subspaces of D that are projections. We thus conclude that these subspaces form a lattice. In fact, it is easy to show that

$$D(j \sqcup k) = x \sqcup \{y : x \in D(j)\}, y \in D(k).$$

Similarly, if S is a directed set of J_D, then $D(\bigsqcup S)$ is the $\bigsqcup$-closure in D of the subset:

$$\{\bigcup D(j) : j \in S.\}$$

These are not very deep facts, but their proofs were very much facilitated by the introduction of J_D and the utilization of the lattice structure of $[D \to D]$. Along the same line we can define for $j, k \in J_D$ a function $(j \to k) \in [D \to D] \to [D \to D]$ by the equation

$$(j \to k)(f) = k \circ f \circ j.$$

It is very easy to show that $(j \to k) \in J_{[D \to D]}$, that $(j \to k)$ is continuous in j and k, and that $[D \to D](j \to k)$ is isomorphic to $[D(j) \to D(k)]$. There are many other interesting operations on projections corresponding to other constructs besides these. And, just as with $(j \to k)$, the operations are

continuous. This makes it possible to prove existence theorems about subspaces by using results like the fixed-point theorem for continuous functions. It would be even nicer if J_D turns out to be a continuous lattice itself, but as far as I can tell this is not likely to be the case.

Before we turn to the iterated function-space construction by inverse limits, there are a couple of other connections between spaces and function spaces that are useful to know.

proposition_3_12.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.ProjectionSpace

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

variable {D : Type*} [CompleteLattice D]

theorem proposition_3_12 :
    (∀ T : Set (ScottMap D D), (∀ j ∈ T, ProjectionSpace.mem j) → ProjectionSpace.mem
    (sSup T))
      ∧ Nonempty (CompleteLattice (ProjectionSpace D)) :=
  ⟨fun _ h => ProjectionSpace.sSup_mem h, ⟨ProjectionSpace.instCompleteLattice⟩⟩

end DomainTheory.ContinuousLattice
```

1.4.22 Proposition 3.13 ✓

3.13 Proposition. Every continuous lattice D is a projection of its function space $[D \to D]$.

Proof: Consider the following pair of mappings $\mathrm{con} : D \to [D \to D]$ and $\mathrm{min} : [D \to D] \to D$ where

$$\mathrm{con}(x)(y) = x$$

and

$$\mathrm{min}(f) = f(\bot)$$

for all $x, y \in D$ and $f \in [D \to D]$. They are obviously continuous. The map con matches every element of D with the corresponding *constant* function in $[D \to D]$. The map min associates to every function in $[D \to D]$ its *minimum* value in the partial ordering. The proof that this pair forms a projection is trivial. □

The pair con, min are not the only pair for making D a projection of $[D \to D]$. The following pair of maps were suggested by David Park:

$$\lambda x.\vec{e}[t, x] \quad \text{and} \quad \lambda f.f(t),$$

where x ranges over D, and f over $[D \to D]$, and where t is a fixed *isolated* element of D (that is, $t \ll t$ holds). The pair con and min will result if we set $t = \bot$. (Note that the expression $\vec{e}[t, x]$, though

continuous in x, is not continuous—or even monotonic—in the variable t.) A lattice may very well possess a large number of isolated

elements, whence a large number of projections. And furthermore this is the only way the function $j = \lambda f.f(t)$ can be a projection. For assume the existence of an inverse $i : D \to [D \to D]$ satisfying the proper conditions. Then it would be the case that

$$i(x)(t) = x$$

and

$$i(f(t))(y) \sqsubseteq f(y)$$

for all $x, y \in D$ and all $f \in [D \to D]$. We can prove for all $u \in D$, if $t \not\sqsubseteq u$, then

$$i(x)(u) = \bot$$

by substituting $\vec{e}[v, x]$ for f in the second equation above, where v is chosen so that $v \ll t$ but not $v \ll u$. But then note that

$$i(x)(t) = \bigsqcup\{i(x)(u) : u \ll t\}.$$

If not $t \ll t$, then $u \ll t$ implies $t \not\sqsubseteq u$, which leads to absurdity. Hence t must be isolated, and, as we noted earlier, the function i is uniquely determined as being the one we already knew. Aside from these pairs of projections one could obtain others by combinations with automorphisms. I was unable to determine whether there are further pairs of an essentially different nature.

The topic of projections in these spaces is rather interesting since one has in a way more freedom in T_0-spaces (particularly in injective spaces) than in ordinary spaces for defining functions. As another example, consider the Cartesian square $D \times D$. Aside from the two obvious projections onto D, there is also the "diagonal" system given by the pair:

$$\lambda x.(x, x) \qquad \text{and} \qquad \lambda(x, y).x \sqcap y$$

We shall note in the next section how the choice of an initial projection effects the construction of an inverse limit.

The projections are not the only useful functions in $[D \to D] \to D$. As a final example of what can be done in function spaces we mention the fixed-point operator.

proposition_3_13.lean

```
module

import DomainTheory.ContinuousLattice.FunctionSpaces.Projection
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

variable {D : Type*} [CompleteLattice D]
```

```
theorem proposition_3_13 (_hD : ContinuousLattice D) :
    Nonempty (ContinuousLatticeProjection D (ScottMap D D)) :=
  ⟨ScottMap.conMinContinuousLatticeProjection⟩

end DomainTheory.ContinuousLattice
```

1.4.23 Proposition 3.14 ✓

3.14 Proposition. *For a continuous lattice D there is a uniquely determined continuous mapping*

$$\mathrm{fix} : [D \to D] \to D$$

where for all $f \in [D \to D]$ and $x \in D$

$$f(\mathrm{fix}(f)) = \mathrm{fix}(f)$$

and whenever $f(x) \sqsubseteq x$, then $\mathrm{fix}(f) \sqsubseteq x$.
and whenever $f(x) \sqsubseteq x$, then

$$\mathrm{fix}(f) \sqsubseteq x.$$

Proof: The proof of the existence of minimal fixed points in complete lattices is well known, as was mentioned in the proof of 2.10.

To establish the continuity, it is sufficient to remark that since all functions $f \in [D \to D]$ are continuous, we have

$$\mathrm{fix}(f) = \bigsqcup_{n=0}^{\infty} f^n(\bot),$$

where $f^n(x) = f(f(\ldots f(x)\ldots))$ (n times). Thus fix is the point-wise lub of continuous functions on $[D \to D]$ and is thus itself continuous. □

proposition_3_14.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap

@[expose] public section

namespace DomainTheory.ContinuousLattice

variable {D : Type*} [CompleteLattice D]

theorem proposition_3_14 (_hD : ContinuousLattice D) :
    ∃ Fix : ScottMap (ScottMap D D) D,
      (∀ f : ScottMap D D, (f : D → D) (Fix f) = Fix f)
        ∧ (∀ (f : ScottMap D D) (x : D), (f : D → D) x ≤ x → (Fix f : D) ≤ x)
        ∧ (∀ g : ScottMap D D → D,
            (∀ f : ScottMap D D, (f : D → D) (g f) = g f) →
            (∀ (f : ScottMap D D) (x : D), (f : D → D) x ≤ x → g f ≤ x) →
            ∀ f : ScottMap D D, g f = Fix f) :=
```

```
  ⟨ScottMap.fixMap, fun f => ScottMap.fix_eq f,
    fun _ _ h => ScottMap.fix_le h,
    fun _ hfix hleast f => ScottMap.fix_unique (hfix f) (fun x hx => hleast f x hx)⟩

end DomainTheory.ContinuousLattice
```

1.5 Inverse limits ✓

Scott's §4 opens with a review of inverse limits for T_0-spaces: an inverse system and compatible sequences, the formal inverse limit type for $\langle D_n, P_n \rangle$, projections from the limit ($j_{\infty n}$), the mediating map into X_∞, and the turn to special inverse systems. The notes that follow build the projection tower ($\mathrm{projectionAlongTower}$, adjunction at one step), embeddings into the limit, lattice and topology on D_∞, and Propositions 4.1–4.4.

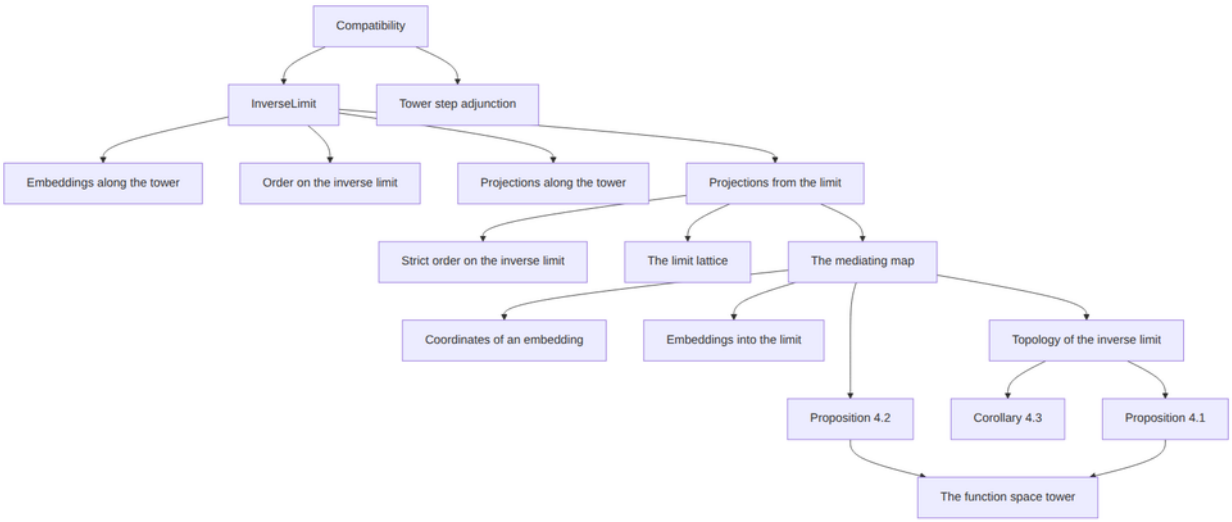

Figure 14: Inverse limits ✓.

1.5.1 Compatibility ✓

By an *inverse system of spaces* we understand as usual a sequence

$$\langle X_n, j_n \rangle_{n=0}^{\infty}$$

of T_0-spaces and continuous maps $j_n : X_{n+1} \to X_n$. The space X_∞, called the *inverse limit* of the sequence, is constructed in the familiar way as that subspace of the product space consisting of exactly those infinite sequences

$$x = \langle x_n \rangle_{n=0}^{\infty},$$

where for each n we have $x_n \in X_n$, and

$$j_n(x_{n+1}) = x_n.$$

For the continuous-lattice tower $\langle D_n, P_n \rangle$, j_n is **`(P n).retr`**.

Definition (`Compatible`). **`Compatible D P x`** holds when $\forall n,\ (P\,n).\mathrm{retr}\,(x\,(n+1)) = x\,n$ for **`x : ∀ n, D n`**.

`Compatible.lean`

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

def Compatible (x : ∀ n, D n) : Prop := ∀ n, (P n).retr (x (n + 1)) = x n

end DomainTheory.ContinuousLattice
```

1.5.2 InverseLimit ✓

The preceding paragraphs describe X_∞ as the subspace of compatible sequences. For $\langle D_n, P_n \rangle$ the library name is **`InverseLimit D P`**.

Definition (`InverseLimit`). **`InverseLimit D P`** is the subtype of tuples **`x : ∀ n, D n`** that satisfy **`Compatible`** (Scott's D_∞ before topology and lattice structure are imposed).

`InverseLimit.lean`

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.Compatible

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]
variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

abbrev InverseLimit : Type u := {x : ∀ n, D n // Compatible D P x}

end DomainTheory.ContinuousLattice
```

1.5.3 Projections from the limit ✓

The space X_∞ is given the product topology, and the maps $j_{\infty\{n} : X_\infty \to X_n\}$ such that

$$j_{\infty n}(x) = x_n$$

are of course continous and satisfy the recursion equation:

$$j_{\infty n} = j_n \circ j_{\infty(n+1)}.$$

On `InverseLimit D P`, `limitProjectionToLevel n` is Scott's $j_{\infty n}$: the n-th coordinate `y.1 n`, packaged as a `ScottMap` once directed suprema on the limit are available.

1.5.4 The mediating map ✓

Besides this we have the expected extension property for any system of continuous maps

$$f_n : Y \to X_n$$

where for each n

$$f_n = j_n \circ f_{n+1}.$$

Because, we can define

$$\{f_\infty : Y \to X_\infty\}$$

by the equation

$$f_\infty(y) = \langle f_n(y)\rangle_{n=0}^{\infty}$$

for all $y \in Y$; whence

$$f_n = j_{\infty n} \circ f_\infty$$

holds.

Category theory (terms) **Diagram / tower.** For $\langle D_n, P_n\rangle$, write $j_n : D_{n+1} \to D_n$ for $(P\,n).\mathrm{retr}$ and $i_n : D_n \to D_{n+1}$ for $(P\,n).\mathrm{incl}$. This is a diagram indexed by $\mathbb{N}$ (vertices D_n, bonds the j_n).

Inverse limit. A **limit** of that diagram is an object D_∞ together with **projections** $j_{\infty\{n} : D_\infty \to D_n\}$ such that $j_{\infty n} = j_n \circ j_{\infty(n+1)}$. In Lean, D_∞ is `InverseLimit D P` and $j_{\infty n}$ is `limitProjectionToLevel n`.

Cone. A **cone** over the diagram consists of an **apex** object Y and **legs** $u_n : Y \to D_n$ that agree with the tower: $u_n = j_n \circ u_{n+1}$. A **mediating map into the limit** is a morphism $\{u_\infty : Y \to D_\infty\}$ with $u_n = j_{\infty n} \circ u_\infty$ for all n.

Cocone. A **cocone** over the **same** diagram consists of an apex D' and legs $f_n : D_n \to D'$ in the opposite direction, compatible with **inclusions**:

$$f_n = f_{n+1} \circ i_n$$

(in Lean: **`hf : ∀ n x, (f n) x = (f (n + 1)) ((P n).incl x)`** for **`f n : ScottMap (D n) D'`**). A **mediating map out of the limit** is $\{g : D_\infty \to D'\}$ with $f_n = g \circ i_{n\infty}$; the library name for $i_{n\infty}$ is **`embInf`**.

Name `coconeInf`. cocone + Inf means a cocone whose mediating map has **domain the inverse limit** (`Inf` = inverse limit, **not** a meet / infimum $\sqcap$ in the order). The cocone **legs** are the family **`f n`**; the **Inf** part is where g is defined.

Supremum in the formula. On continuous lattices, a point $x \in D_\infty$ is determined by its coordinates and by directed suprema of approximants. The mediating value $g(x)$ is expressed as a **supremum** $\bigsqcup_n$ over levels of the leg values $(f\,n)(x_n)$—lattice **sup**, not an infimum over n.

Reading Scott's symbols in category-theoretic terms Scott's $f_n : Y \to X_n$ are the **legs of a cone** with apex Y: compatibility is exactly $f_n = j_n \circ f_{n+1}$. His $\{f_\infty : Y \to X_\infty\}$ is the **mediating map into the inverse limit**, assembling a compatible sequence $f_\infty(y) = \langle f_n(y) \rangle$, with factorization $f_n = j_{\infty n} \circ f_\infty$. This paragraph is **not** a cocone (all arrows point **into** the stages, not **out of** them).

For $\langle D_n, P_n \rangle$, X_∞ is **`InverseLimit D P`**. The dual **cocone** story—maps $D_n \to D'$, mediating map **out of** the limit, and **`coconeInf`**—is what Corollary 4.3 formalizes; Scott's displayed f_n are not those legs.

Definition (`coconeInf`) Given **`f : ∀ n, ScottMap (D n) D'`** and **`x : InverseLimit D P`**,

$$\texttt{coconeInf}\; D\; P\; f\; x = \bigsqcup_{n=0}^{\infty} (f\,n)\,(x.1\,n).$$

When **`hf`** holds, **`coconeInf D P f`** is the unique mediating **`ScottMap (InverseLimit D P) D'`** (as **`ScottMap`**, via **`preservesDirectedSup`**).

Theorems in the namespace `coconeInf` The definition **`coconeInf`** sits outside the namespace; the lemmas below are **`coconeInf.apply`**, **`coconeInf.climb`**, and so on.

Theorem (`coconeInf.apply`). *For **`f`** and **`x`**,*

$$\texttt{coconeInf}\; D\; P\; f\; x = \bigsqcup_{n} (f\,n)\,(x.1\,n).$$

Proof. Definition of **`coconeInf`**. □

Theorem (`coconeInf.climb`). *If **`hf`**, then for **`n`**, **`x : D n`**, and **`h : n ≤ m`**,*

$$(f\,m)\,(\text{embeddingAlongTower}\; D\; P\; h\; x) = (f\,n)\,x.$$

Proof. **`Nat.le_induction`**: base **`embeddingAlongTower.self`**, successor **`embeddingAlongTower.succ`** and **`hf`**. □

Theorem (`coconeInf.descend`). *If **`hf`**, for **`h : m ≤ n`** and **`x : D n`**,*

$$(f\,m)\,(\text{projectionAlongTower}\; D\; P\; h\; x) \le (f\,n)\,x.$$

Proof. **`Nat.le_induction`**: base **`projectionAlongTower.self`**, successor **`projectionAlongTower.su`** **`hf`**, **`incl_retr_le`**. □

Theorem (`coconeInf.comp_embInf`). *If **`hf`**, for **`n`**, **`x : D n`**,*

$$\texttt{coconeInf}\, D\, P\, f\, (\text{embInf}\, D\, P\, n\, x) = (f\, n)\, x.$$

Proof. **iComp.of_le / iComp.of_ge**, **climb**, **descend**, and **iComp.self**. □

Theorem (coconeInf.preservesDirectedSup). *For every* ***f****,* ***coconeInf D P f*** *preserves directed suprema.*

Proof. Coordinatewise **limitProjectionToLevel.preservesDirectedSup**, directed sup for each **f n**, **apply**, **iSup_comm**. □

Corollary 4.3: **coconeInf D P f** is the unique mediating cocone **ScottMap**—existence from **comp_embInf**, uniqueness from **inverseLimit.eq_iSup**.

1.5.5 Special inverse systems ✓

So much for a review of inverse limits. In this paper our interest will center on rather special inverse systems and their limits.

1.5.6 Projections along the tower ✓

For an inverse system of continuous lattices $\langle D_n, P_n\rangle$ with $j_n = (P\, n).\text{retr} : D_{n+1} \to D_n$, Scott iterates the j_n but does not introduce a separate symbol for the composite. When $m \le n$, descending from level n to m means applying $j_{n-1}, j_{n-2}, \ldots, j_m$ (dually, Embeddings along the tower climbs with $i_k = (P\, k).\text{incl}$).

Definition (projectionAlongTower). Given **h : m ≤ n**, **projectionAlongTower D P h** is the map $D_n \to D_m$ obtained by recursion on **h**, at each successor step applying **(P k).retr**.

In the namespace **projectionAlongTower** we have

Theorem (self). *For* ***h : m ≤ m****,* ***projectionAlongTower D P h*** *is the identity on D_m.*

Proof. The recursion for **Nat.leRecOn** at a reflexive proof is **id**. □

Theorem (succ). *If* ***h1 : m ≤ n*** *and* ***h2 : m ≤ n + 1****, then for all* ***z : D (n + 1)****,*

$$\text{projectionAlongTower}\, D\, P\, h_2\, z = \text{projectionAlongTower}\, D\, P\, h_1\, (j_n(z)).$$

Proof. Unfold **projectionAlongTower** and **Nat.leRecOn_succ**. □

Theorem (mono). *If **h : m ≤ n** and **x ≤ y** in D_n, then **projectionAlongTower D P h x ≤ projectionAlongTower D P h y.*

Proof. Induct on **n** and **h** with **Nat.le_induction**. The base case is **self**. For the successor step, rewrite with **succ** and use monotonicity of **(P k).retr**. □

Theorem (compatible). *If* ***y : InverseLimit D P****, then for every* ***n*** *and* ***h : m ≤ n****,*

$$\text{projectionAlongTower}\, D\, P\, h\, (y\, n) = y\, m.$$

Proof. Induct on **n** and **h**. The base is **self**; the successor step uses **succ** and compatibility **(P k).retr (y (k + 1)) = y k**. □

Theorem (retr). *If* ***h : m + 1 ≤ n****, then for all* ***x : D n****,*

$$j_m\big(\text{projectionAlongTower}\, D\, P\, h\, x\big) = \text{projectionAlongTower}\, D\, P\, h'\, x \quad \text{for the unique } h' : m \le n \text{ with } m{+}1 \le n.$$

Proof. Induct on **n** and **h**, unfolding **succ** and using **self** at the base. □

Theorem (preservesDirectedSup). *If* ***h : m ≤ n****, then* ***projectionAlongTower D P h*** *preserves directed suprema.*

Proof. Induct on **h**. At **m = n**, **self** gives the identity. For the successor step, **succ** expresses **projectionAlongTower** as a composite of the lower **projectionAlongTower** with **(P k).retr**; apply **ScottMap.preservesDirectedSup_comp** and directed-sup preservation for **(P k).retr**. □

projectionAlongTower.lean

```
module
public import DomainTheory.ContinuousLattice.InverseLimits.InverseLimit

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

def projectionAlongTower {m n : ℕ} (h : m ≤ n) (x : D n) : D m :=
  Nat.leRecOn (C := fun k => D k → D m) h
    (fun {k} (g : D k → D m) (w : D (k + 1)) => g ((P k).retr w)) id x

namespace projectionAlongTower

theorem self {m : ℕ} (h : m ≤ m) (x : D m) : projectionAlongTower D P h x = x := by
  simp only [projectionAlongTower, Nat.leRecOn_self, id_eq]

theorem succ {m n : ℕ} (h1 : m ≤ n) (h2 : m ≤ n + 1) (z : D (n + 1)) :
    projectionAlongTower D P h2 z = projectionAlongTower D P h1 ((P n).retr z) := by
  simp only [projectionAlongTower]
  rw [Nat.leRecOn_succ (C := fun k => D k → D m) h1]

theorem mono {m n : ℕ} (h : m ≤ n) {x y : D n} (hxy : x ≤ y) :
    projectionAlongTower D P h x ≤ projectionAlongTower D P h y := by
  induction n, h using Nat.le_induction with
  | base =>
      rw [self, self]
      exact hxy
  | succ k hk ih =>
      rw [succ D P hk (Nat.le_succ_of_le hk), succ D P hk (Nat.le_succ_of_le hk)]
      exact ih ((P k).retr.monotone hxy)

theorem compatible {m : ℕ} (y : InverseLimit D P) :
    ∀ {n : ℕ} (h : m ≤ n), projectionAlongTower D P h (y.1 n) = y.1 m := by
  intro n h
  induction n, h using Nat.le_induction with
  | base => rw [self]
  | succ k hk ih => rw [succ D P hk (Nat.le_succ_of_le hk), y.2 k, ih]

theorem retr {m : ℕ} : ∀ {n : ℕ} (h : m + 1 ≤ n) (x : D n),
```

```
    (P m).retr (projectionAlongTower D P h x) = projectionAlongTower D P (Nat.
    le_of_succ_le h) x := by
  intro n h
  induction n, h using Nat.le_induction with
  | base =>
      intro x
      rw [succ D P (le_refl m) (Nat.le_of_succ_le (le_refl (m + 1))) x]
      simp only [self]
  | succ k hk ih =>
      intro x
      rw [succ D P hk (Nat.le_succ_of_le hk) x, ih ((P k).retr x),
        succ D P (Nat.le_of_succ_le hk) (Nat.le_of_succ_le (Nat.le_succ_of_le hk)) x]

theorem preservesDirectedSup {m n : ℕ} (h : m ≤ n) :
    PreservesDirectedSup (projectionAlongTower D P h) := by
  induction n, h using Nat.le_induction with
  | base =>
      have hid : projectionAlongTower D P (le_refl m) = id :=
        funext (fun x => self D P (le_refl m) x)
      rw [hid]; intro S _ _; simp
  | succ k hk ih =>
      have hfun : projectionAlongTower D P (Nat.le_succ_of_le hk)
          = projectionAlongTower D P hk ∘ (fun z : D (k + 1) => (P k).retr z) :=
        funext (fun x => succ D P hk (Nat.le_succ_of_le hk) x)
      rw [hfun]
      exact ScottMap.preservesDirectedSup_comp ih
        (fun S hS hd => (P k).retr.preservesDirectedSup_coe S hS hd)

end projectionAlongTower

end InverseLimit

end DomainTheory.ContinuousLattice
```

1.5.7 Tower step adjunction ✓

For an inverse system $\langle D_n, P_n \rangle$, fix one index n. Write $i_n = (P\,n).\mathrm{incl} : D_n \to D_{n+1}$ and $j_n = (P\,n).\mathrm{retr} : D_{n+1} \to D_n$ for the continuous lattice projection on that **step** (one rung of the tower, not the composite descent in Projections along the tower).

What an adjunction is (order theory) Two posets and two monotone maps $f : P \to Q$, $g : Q \to P$ form an **adjunction** $f \dashv g$ when comparisons after applying f are equivalent to comparisons after applying g:

$$f(x) \le y \quad \Longleftrightarrow \quad x \le g(y) \qquad (x \in P,\ y \in Q).$$

Same question on the left always matches the same question on the right. In Lean this predicate is named **`GaloisConnection`**; "Galois connection" and "adjunction between posets" mean the same thing here. The map on the left (f) is the **left adjoint**, the map on the right (g) the **right adjoint**.

Reading the equivalence for one tower step: embedding $x \in D_n$ into D_{n+1} and comparing to y is the same as comparing x to the retraction $j_n(y) \in D_n$.

Why a projection step is an adjunction A continuous lattice projection is not merely two monotone maps. It satisfies $j_n \circ i_n = \mathrm{id}_{D_n}$ (**retr_incl**) and $i_n(j_n(y)) \leq y$ for all $y \in D_{n+1}$ (**incl_retr_le**). Those two facts are exactly the two directions of the equivalence above:

- If $i_n(x) \leq y$, apply monotone j_n and use $j_n(i_n(x)) = x$ to get $x \leq j_n(y)$.
- If $x \leq j_n(y)$, apply monotone i_n and use $i_n(j_n(y)) \leq y$ to get $i_n(x) \leq y$.

Without **incl_retr_le**, a retraction alone would not prove the second implication in general. The library lemma **tower_step_galoisConnection** records the packaged result.

Theorem (tower_step_galoisConnection). *For every* **n : ℕ**, ***GaloisConnection ((P n).incl) ((P n).retr)****: for all* **x : D n**, **y : D (n + 1)**,

$$i_n(x) \leq y \quad \Longleftrightarrow \quad x \leq j_n(y).$$

Proof. The forward implication applies **(P n).retr** monotonically and uses **retr_incl**. The reverse uses monotonicity of **incl** and **incl_retr_le**. □

This adjunction is used when building infima on the inverse limit (see The limit lattice): the right adjoint **retr** preserves arbitrary meets.

tower_step_galoisConnection.lean

```
module
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

/-- At each index `n` of the tower, `(P n).incl` and `(P n).retr` form a Galois
    connection. -/
theorem tower_step_galoisConnection (n : ℕ) :
    GaloisConnection ((P n).incl : D n → D (n + 1)) ((P n).retr : D (n + 1) → D n) :=
     by
  intro x y
  constructor
  · intro h
    have h' := (P n).retr.monotone h
    rwa [(P n).retr_incl] at h'
  · intro h
    exact le_trans ((P n).incl.monotone h) ((P n).incl_retr_le y)

end InverseLimit

end DomainTheory.ContinuousLattice
```

1.5.8 Embeddings along the tower ✓

For an inverse system of continuous lattices $\langle D_n, P_n\rangle$ with $i_n = (P\,n).\mathrm{incl} : D_n \to D_{n+1}$, Scott iterates the i_n but does not introduce a separate symbol for the composite. When $n \le m$, climbing from level n to m means applying $i_n, i_{n+1}, \ldots, i_{m-1}$ (dually, Projections along the tower descends with $j_k = (P\,k).\mathrm{retr}$). Each i_n is the inclusion half of the continuous lattice projection on one **step** of the tower (Tower step adjunction), not the composite climb defined here.

Definition (`embeddingAlongTower`). Given `h : n ≤ m`, `embeddingAlongTower D P h` is the map $D_n \to D_m$ obtained by recursion on `h`, at each successor step applying `(P k).incl`.

In the namespace `embeddingAlongTower` we have

Theorem (`self`). *For `h : n ≤ n`, `embeddingAlongTower D P h` is the identity on D_n.*

Proof. The recursion for `Nat.leRecOn` at a reflexive proof is `id`. □

Theorem (`succ`). *If `h1 : n ≤ m` and `h2 : n ≤ m + 1`, then for all `x : D n`,*

$$\mathrm{embeddingAlongTower}\;D\;P\;h_2\;x = i_m\big(\mathrm{embeddingAlongTower}\;D\;P\;h_1\;x\big).$$

Proof. Unfold `embeddingAlongTower` and `Nat.leRecOn_succ`. □

Theorem (`succ_left`). *If `h1 : n ≤ m` and `h2 : n + 1 ≤ m`, then for all `x : D n`,*

$$\mathrm{embeddingAlongTower}\;D\;P\;h_2\;(i_n(x)) = \mathrm{embeddingAlongTower}\;D\;P\;h_1\;x.$$

Proof. Unfold `embeddingAlongTower` and apply `Nat.leRecOn_succ_left`. □

Theorem (`mono`). *If `h : n ≤ m` and `x ≤ y` in D_n, then **`embeddingAlongTower D P h x ≤ embeddingAlongTower D P h y`.*

Proof. Induct on `m` and `h` with `Nat.le_induction`. The base case is `self`. For the successor step, rewrite with `succ` and use monotonicity of `(P k).incl`. □

Theorem (`le`). *If `y : InverseLimit D P` and `h : n ≤ m`, then*

$$\mathrm{embeddingAlongTower}\;D\;P\;h\;(y\,n) \le y\,m.$$

Proof. Induct on `m` and `h`. The base is `self`. For the successor step, use `succ`, monotonicity of `(P k).incl`, compatibility `(P k).retr (y (k + 1)) = y k`, and `incl_retr_le`. □

Theorem (`preservesDirectedSup`). *If `h : n ≤ m`, then `embeddingAlongTower D P h` preserves directed suprema.*

Proof. Induct on `h`. At `n = m`, `self` gives the identity. For the successor step, `succ` expresses `embeddingAlongTower` as a composite of `(P k).incl` with the lower `embeddingAlongTower`; apply `ScottMap.preservesDirectedSup_comp` and directed-sup preservation for `(P k).incl`. □

embeddingAlongTower.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.InverseLimit

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set
```

```
universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

def embeddingAlongTower {n m : ℕ} (h : n ≤ m) (x : D n) : D m :=
  Nat.leRecOn h (fun {k} (y : D k) => (P k).incl y) x

namespace embeddingAlongTower

theorem self {n : ℕ} (h : n ≤ n) (x : D n) : embeddingAlongTower D P h x = x := by
  simp only [embeddingAlongTower, Nat.leRecOn_self]

theorem succ {n m : ℕ} (h1 : n ≤ m) (h2 : n ≤ m + 1) (x : D n) :
    embeddingAlongTower D P h2 x = (P m).incl (embeddingAlongTower D P h1 x) := by
  simp only [embeddingAlongTower]
  rw [Nat.leRecOn_succ h1]

theorem succ_left {n m : ℕ} (h1 : n ≤ m) (h2 : n + 1 ≤ m) (x : D n) :
    embeddingAlongTower D P h2 ((P n).incl x) = embeddingAlongTower D P h1 x := by
  simp only [embeddingAlongTower]
  exact Nat.leRecOn_succ_left x h1 h2

theorem le {n : ℕ} (y : InverseLimit D P) {m : ℕ} (h : n ≤ m) :
    embeddingAlongTower D P h (y.1 n) ≤ y.1 m := by
  induction m, h using Nat.le_induction with
  | base => exact le_of_eq (self D P _ _)
  | succ k hk ih =>
      rw [succ D P hk (Nat.le_succ_of_le hk)]
      calc (P k).incl (embeddingAlongTower D P hk (y.1 n))
          ≤ (P k).incl (y.1 k) := (P k).incl.monotone ih
        _ = (P k).incl ((P k).retr (y.1 (k + 1))) := by rw [y.2 k]
        _ ≤ y.1 (k + 1) := (P k).incl_retr_le _

theorem mono {n m : ℕ} (h : n ≤ m) {x y : D n} (hxy : x ≤ y) :
    embeddingAlongTower D P h x ≤ embeddingAlongTower D P h y := by
  induction m, h using Nat.le_induction with
  | base =>
      rw [self, self]
      exact hxy
  | succ k hk ih =>
      rw [succ D P hk (Nat.le_succ_of_le hk), succ D P hk (Nat.le_succ_of_le hk)]
      exact (P k).incl.monotone ih

theorem preservesDirectedSup {n m : ℕ} (h : n ≤ m) :
    PreservesDirectedSup (embeddingAlongTower D P h) := by
  induction m, h using Nat.le_induction with
  | base =>
      have hid : embeddingAlongTower D P (le_refl n) = id :=
        funext (fun x => self D P (le_refl n) x)
      rw [hid]; intro S _ _; simp
  | succ k hk ih =>
```

```
      have hfun : embeddingAlongTower D P (Nat.le_succ_of_le hk)
          = (fun y : D k => (P k).incl y) ∘ embeddingAlongTower D P hk :=
        funext (fun x => succ D P hk (Nat.le_succ_of_le hk) x)
      rw [hfun]
      exact ScottMap.preservesDirectedSup_comp
        (fun S hS hd => (P k).incl.preservesDirectedSup_coe S hS hd) ih

end embeddingAlongTower

end InverseLimit

end DomainTheory.ContinuousLattice
```

1.5.9 Coordinates of an embedding ✓

A point of the inverse limit $D_\infty = \mathrm{InverseLimit}\, D\, P$ is a compatible family $(y_m)_{m\in\mathbb{N}}$ with $y_m \in D_m$ and $j_m(y_{m+1}) = y_m$. Scott's embedding $\{i_{n\infty} : D_n \to D_\infty\}$ (Prop. 4.2) is built **coordinate by coordinate**: for fixed n and $x \in D_n$, the m-th component $i_{n\infty}(x)_m$ must be an element of D_m that fits into such a family.

- When $m \geq n$, the only sensible choice is to **climb** from x along the tower of inclusions $i_k = (P\,k).\mathrm{incl}$ — the map Embeddings along the tower **`embeddingAlongTower`**.
- When $m < n$, compatibility with higher coordinates forces the value at m to be obtained by **descending** from x along retractions $j_k = (P\,k).\mathrm{retr}$ — Projections along the tower **`projectionAlongTower`**.

`iComp` is short for Scott's $i_{n\infty}$ **component**: **`iComp D P n x m`** is the m-th coordinate $(i_{n\infty}(x))_m$ (the **`i`** matches Scott's embedding $i_{n\infty}$, **`Comp`** = component at index **`m`**). There is no single tower map $D_n \to D_m$ for all **`m`**: the recipe switches at **`n ≤ m`** vs **`n ≰ m`**, and **`iComp`** packages that case split once so **`embInf`** can build **`i_{n\infty}(x)`** as the compatible sequence **`m ↦ iComp D P n x m`**.

Definition (`iComp`). For **`n`**, **`x : D n`**, and **`m`**,

$$\texttt{iComp}\, D\, P\, n\, x\, m = \begin{cases} \texttt{embeddingAlongTower}\, D\, P\, h\, x & \text{if } n \leq m, \\ \texttt{projectionAlongTower}\, D\, P\, h'\, x & \text{if } n \not\leq m, \end{cases}$$

where **`h`** and **`h'`** are the canonical proofs produced from **`n ≤ m`** or **`¬ n ≤ m`**.

In the namespace **`iComp`** we have

Theorem (`of_le`). *If **`h : n ≤ m`**, then **`iComp D P n x m = embeddingAlongTower D P h x`**.*

Theorem (`of_ge`). *If **`¬ n ≤ m`**, then **`iComp D P n x m = projectionAlongTower D P (le_of_lt (not_le.mp h)) x`**.*

Theorem (`self`). *For all **`n`**, **`x : D n`**, **`iComp D P n x n = x`**.*

Proof. **`of_le`** and **`embeddingAlongTower.self`**. □ (This is the identity **`j_{\infty n} ∘ i_{n\infty} = \mathrm{id}`** at the coordinate level.)

Theorem (`compatible`). *For every **`n`**, **`x : D n`**, the sequence **`fun m => iComp D P n x m`** satisfies the inverse-limit compatibility laws.*

Proof. Case split on **`n ≤ m`**, **`n ≤ m + 1`**, and **`m + 1 ≤ n`**; the delicate middle case **`n = m + 1`** uses **`projectionAlongTower.succ`** and **`self`**, the general descent case uses **`projectionAlongTower.retr`**. □

Theorem (`incl_le`). *If **`y : InverseLimit D P`**, then for all **`n`**, **`m`**, **`iComp D P n (y.1 n) m ≤ y.1 m`.*

Proof. If **`n ≤ m`**, **`embeddingAlongTower.le`**; if **`n ≰ m`**, the coordinate equals **`y.1 m`** by **`projectionAlongTower.compatible`**. □

Theorem (`preservesDirectedSup`). *For fixed **`n`**, **`m`**, **`fun x => iComp D P n x m`** preserves directed suprema.*

Proof. **`by_cases`** on **`n ≤ m`**, then rewrite to **`embeddingAlongTower`** or **`projectionAlongTower`**. □

Theorem (`monotone`). *For fixed **`n`**, **`m`**, **`fun x => iComp D P n x m`** is monotone.*

Proof. From **`preservesDirectedSup`** via **`preservesDirectedSup_monotone`**. □

Use. Embeddings into the limit packages ⟨**`iComp D P n x, iComp.compatible D P n x`**⟩ as **`embInf.fun D P n x : InverseLimit D P`** — Scott's $i_{n\infty}(x)$.

iComp.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embeddingAlongTower
public import DomainTheory.ContinuousLattice.InverseLimits.projectionAlongTower
import DomainTheory.ContinuousLattice.ScottMaps.preservesDirectedSup_monotone

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

def iComp (n : ℕ) (x : D n) (m : ℕ) : D m :=
  if h : n ≤ m then embeddingAlongTower D P h x
  else projectionAlongTower D P (le_of_lt (not_le.mp h)) x

namespace iComp

theorem of_le {n m : ℕ} (h : n ≤ m) (x : D n) :
    iComp D P n x m = embeddingAlongTower D P h x :=
  dite_eq_left h

theorem of_ge {n m : ℕ} (h : ¬ n ≤ m) (x : D n) :
    iComp D P n x m = projectionAlongTower D P (le_of_lt (not_le.mp h)) x :=
  dite_eq_right h

theorem self (n : ℕ) (x : D n) : iComp D P n x n = x := by
  rw [of_le D P (le_refl n), embeddingAlongTower.self]

theorem incl_le (n : ℕ) (y : InverseLimit D P) (m : ℕ) :
    iComp D P n (y.1 n) m ≤ y.1 m := by
```

```
  by_cases h : n ≤ m
  · rw [of_le D P h]; exact embeddingAlongTower.le D P y h
  · rw [of_ge D P h]
    exact le_of_eq (projectionAlongTower.compatible D P y (le_of_lt (not_le.mp h)))

theorem preservesDirectedSup (n m : ℕ) :
    PreservesDirectedSup (fun x : D n => iComp D P n x m) := by
  by_cases h : n ≤ m
  · have hfun : (fun x : D n => iComp D P n x m) = embeddingAlongTower D P h :=
      funext (fun x => of_le D P h x)
    rw [hfun]; exact embeddingAlongTower.preservesDirectedSup D P h
  · have hfun : (fun x : D n => iComp D P n x m) =
        projectionAlongTower D P (le_of_lt (not_le.mp h)) :=
      funext (fun x => of_ge D P h x)
    rw [hfun]; exact projectionAlongTower.preservesDirectedSup D P _

theorem monotone (n m : ℕ) : Monotone (fun x : D n => iComp D P n x m) :=
  preservesDirectedSup_monotone (preservesDirectedSup D P n m)

theorem compatible (n : ℕ) (x : D n) : Compatible D P (iComp D P n x) := by
  intro m
  by_cases h1 : n ≤ m
  · rw [of_le D P h1, of_le D P (Nat.le_succ_of_le h1),
      embeddingAlongTower.succ D P h1 (Nat.le_succ_of_le h1), (P m).retr_incl]
  · by_cases h2 : n ≤ m + 1
    · have hn : n = m + 1 := le_antisymm h2 (not_le.mp h1)
      subst hn
      rw [of_le D P (le_refl (m + 1)), embeddingAlongTower.self, of_ge D P h1,
        projectionAlongTower.succ D P (le_refl m) (le_of_lt (not_le.mp h1)) x,
        projectionAlongTower.self]
    · rw [of_ge D P h2, of_ge D P h1,
        projectionAlongTower.retr D P (le_of_lt (not_le.mp h2)) x]

end iComp

end InverseLimit

end DomainTheory.ContinuousLattice
```

1.5.10 Embeddings into the limit ✓

For an inverse system of continuous lattices $\langle D_n, P_n\rangle$, write $D_\infty = \mathrm{InverseLimit}\, D\, P$ for the limit lattice of compatible sequences $(y_m)_{m\in\mathbb{N}}$. Scott's **inverse embedding** at level n is a map $\{i_{n\infty} : D_n \to D_\infty\}$ that sends $x \in D_n$ to the point of D_∞ whose coordinates are determined by climbing or descending the tower from x at index n.

Definition (`embInf`). For each $n \in \mathbb{N}$, **`embInf D P n`** is the **Scott map** $D_n \to D_\infty$ whose underlying function is **`embInf.fun D P n`** and whose Scott continuity is proved from directed-sup preservation on that function.

Definition (`embInf.fun`). For $n \in \mathbb{N}$ and $x \in D_n$, **`embInf.fun D P n x`** is the element of **`InverseLimit D P`** whose m-th coordinate is **`iComp D P n x m`**—equivalently, the compatible sequence $(i_{n\infty}(x)_m)_{m\in\mathbb{N}}$ in Scott's notation.

In the namespace **`embInf`** we have

Theorem (coe). *For all* **n**, **x : D n**, *the coordinate function of* **embInf.fun D P n x** *is* **iComp D P n x**:

$$(\mathrm{embInf.fun}\, D\, P\, n\, x)_m = \mathrm{iComp}\, D\, P\, n\, x\, m.$$

Proof. Definition of **embInf.fun** as a subtype of **iComp** with compatibility. □

Theorem (monotone). *For each* **n**, *the map* **embInf.fun D P n : D_n → D_\infty** *is monotone (with respect to the lattice orders on D_n and D_∞).*

Proof. Reduce to comparisons coordinatewise via **Subtype.coe_le_coe**; at each **m** apply **iComp.monotone**. □

Theorem (preservesDirectedSup). *For each* **n**, **embInf.fun D P n** *preserves directed suprema in D_n.*

Proof. For a directed set $S \subseteq D_n$, compare suprema in D_∞ using **coe_sSup_of_directed** on the image **embInf.fun D P n " S**, then rewrite each coordinate with **iComp.preservesDirectedSup**. □

Theorem (succ). *For all* **n**, **x : D_n**,

$$i_{(n+1)\infty}\,(i_n(x)) = i_{n\infty}(x),$$

formally **embInf D P (n + 1) ((P n).incl x) = embInf D P n x**.

Proof. Compare coordinates **m** by case analysis on **n ≤ m**, **n + 1 ≤ m**, and **m < n**; use the computation laws for **iComp**, **embeddingAlongTower**, and **projectionAlongTower**. □

Theorem (le_succ). *If* **y : InverseLimit D P**, *then for every* **n**,

$$i_{n\infty}(y_n) \le i_{(n+1)\infty}(y_{n+1}).$$

Proof. Rewrite with **succ** at **x = y n**, then apply **monotone** for index **n + 1** and **(P n).incl_retr_le** with compatibility **(P n).retr (y (n + 1)) = y n**. □

Theorem (family_directed). *If* **y : InverseLimit D P**, *the set* $\{\, i_{n\infty}(y_n) \mid n \in \mathbb{N} \,\}$ *is directed in D_∞.*

Proof. **le_succ** gives a monotone sequence in **n**; apply **directedOn_range** and **monotone_nat_of_le_succ**. □

1.5.11 Order on the inverse limit ✓

A point of the inverse limit $D_\infty = \mathrm{InverseLimit}\, D\, P$ is a compatible sequence $(x_m)_{m\in\mathbb{N}}$ with $x_m \in D_m$. The **product** order on all sequences (y_m) would declare $x \le y$ when $x_m \le y_m$ at every index; the limit inherits that comparison because D_∞ is a subtype of the product.

Definition (inverseLimitLE). For **x**, **y : InverseLimit D P**,

$$\mathtt{inverseLimitLE}\, D\, P\, x\, y \iff \forall n,\ x_n \le y_n$$

(coordinatewise $\le$ in each stage lattice D_n; in Lean, **x.1 n ≤ y.1 n**).

In the namespace **inverseLimitLE** we have

Theorem (refl). *For all **x**, **inverseLimitLE D P x x.*

Proof. **le_refl** at each coordinate. □

Theorem (trans). *If **inverseLimitLE D P x y** and **inverseLimitLE D P y z**, then **inverseLimitLE D P x z.*

Proof. **le_trans** coordinatewise. □

Theorem (antisymm). *If **inverseLimitLE D P x y** and **inverseLimitLE D P y x**, then **x = y.*

Proof. **Subtype.ext** and **funext**: equal coordinates give **le_antisymm** at each **n**. □

Use. Proofs that a map into D_∞ is monotone (for example **embInf.monotone**) rewrite with **Subtype.coe_le_coe** and compare coordinates in D_m at each **m**.

inverseLimitLE.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.InverseLimit

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

/-- Coordinatewise $\le$ on compatible sequences: `x ≤ y` iff `x.1 n ≤ y.1 n` for
    every `n`. -/
abbrev inverseLimitLE (x y : InverseLimit D P) : Prop :=
  ∀ n,
    @LE.le (D n)
      (ChainCompletePartialOrder.instOfCompleteLattice
        (α := D n)).toPartialOrder.toPreorder.toLE
      (x.1 n) (y.1 n)

namespace inverseLimitLE

theorem refl (x : InverseLimit D P) :
    inverseLimitLE D P x x :=
  fun n => le_refl (x.1 n)

theorem trans (x y z : InverseLimit D P)
    (hxy : inverseLimitLE D P x y) (hyz : inverseLimitLE D P y z) :
    inverseLimitLE D P x z :=
  fun n => le_trans (hxy n) (hyz n)

theorem antisymm (x y : InverseLimit D P)
    (hxy : inverseLimitLE D P x y) (hyx : inverseLimitLE D P y x) :
    x = y :=
  Subtype.ext (funext fun n => le_antisymm (hxy n) (hyx n))

end inverseLimitLE

end InverseLimit
```

```
end DomainTheory.ContinuousLattice
```

1.5.12 Strict order on the inverse limit ✓

On the inverse limit $D_\infty = \mathrm{InverseLimit}\, D\, P$, the coordinatewise order Order on the inverse limit **`inverseLimitLE`** is the natural $\leq$. The **strict** comparison is the usual one for a partial order: below in $\leq$ but not above.

Definition (`inverseLimitLT`). For **`x`**, **`y : InverseLimit D P`**,

$$\texttt{inverseLimitLT}\, D\, P\, x\, y \iff \texttt{inverseLimitLE}\, D\, P\, x\, y \wedge \neg\, \texttt{inverseLimitLE}\, D\, P\, y\, x.$$

Equivalently: $x \leq y$ coordinatewise and it is **not** the case that $y \leq x$ coordinatewise (so some coordinate is strictly below, or the sequences differ).

In the namespace **`inverseLimitLT`** we have

Theorem (`iff_LE_not_GE`). *For all* ***`x`****,* ***`y`****,*

$$\texttt{inverseLimitLT}\, D\, P\, x\, y \iff \texttt{inverseLimitLE}\, D\, P\, x\, y \wedge \neg\, \texttt{inverseLimitLE}\, D\, P\, y\, x.$$

Proof. Definition of **`inverseLimitLT`**. □

`inverseLimitLT.lean`

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitLE

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

/-- Strict coordinatewise order: `inverseLimitLE` and not the reverse. -/
abbrev inverseLimitLT (x y : InverseLimit D P) : Prop :=
  inverseLimitLE D P x y ∧ ¬ inverseLimitLE D P y x

namespace inverseLimitLT

theorem iff_LE_not_GE (x y : InverseLimit D P) :
    inverseLimitLT D P x y ↔
      inverseLimitLE D P x y ∧ ¬ inverseLimitLE D P y x :=
```

```
  Iff.rfl

end inverseLimitLT

end InverseLimit

end DomainTheory.ContinuousLattice
```

1.5.13 The limit lattice ✓

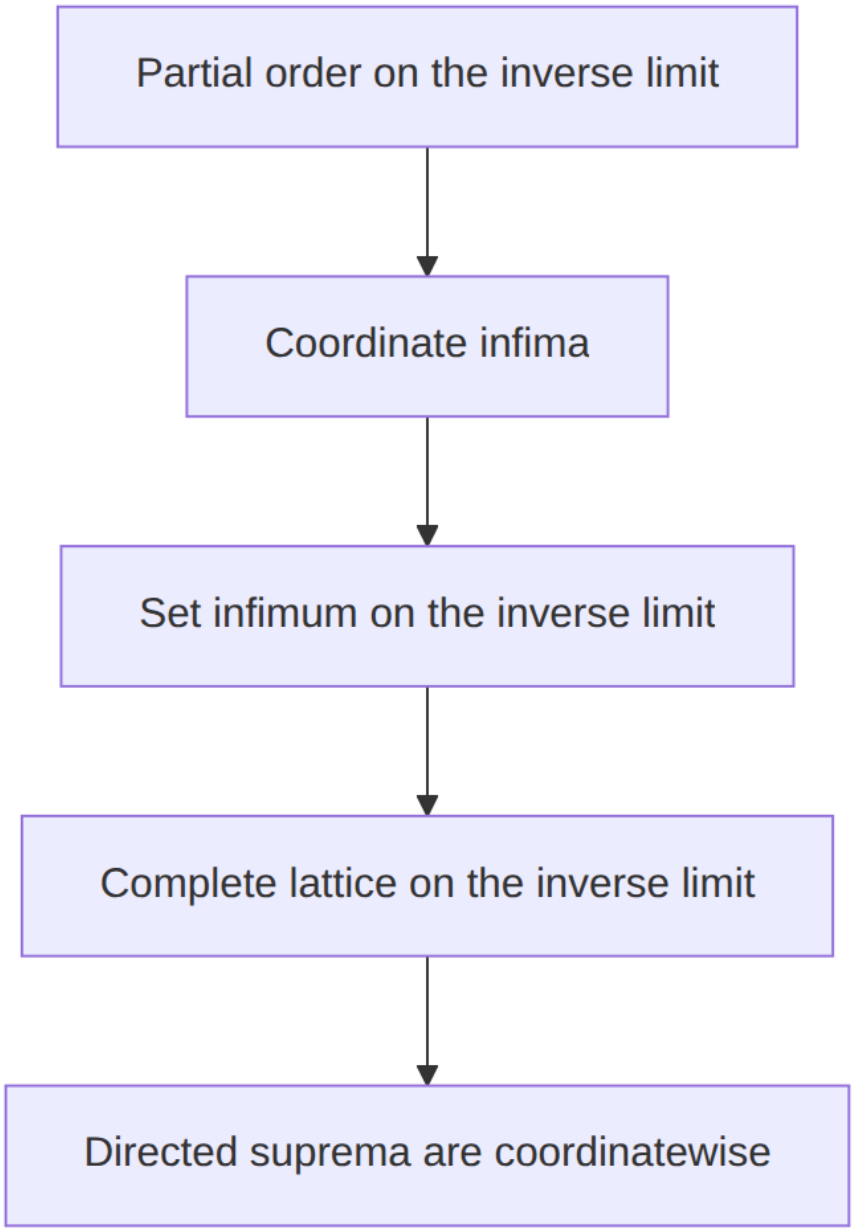

Figure 15: The limit lattice ✓.

Partial order on the inverse limit ✓ Write $D_\infty = \mathrm{InverseLimit}\, D\, P$. The coordinatewise relations Order on the inverse limit **`inverseLimitLE`** and Strict order on the inverse limit **`inverseLimitLT`** are the order on D_∞.

Definition (`inverseLimitPartialOrder`). **`inverseLimitPartialOrder D P`** is the

`PartialOrder` instance on **`InverseLimit D P`** with

- **`le := inverseLimitLE D P`**
- **`lt := inverseLimitLT D P`**
- **`le_refl`**, **`le_trans`**, **`le_antisymm`** from **`inverseLimitLE.refl`**, **`trans`**, **`antisymm`**
- **`lt_iff_le_not_ge`** from **`inverseLimitLT.iff_LE_not_GE`**

inverseLimitPartialOrder.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitLT

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

/-- Coordinatewise order on `InverseLimit D P` from `inverseLimitLE` / `inverseLimitLT
    `. -/
instance inverseLimitPartialOrder : PartialOrder (InverseLimit D P) where
  le := inverseLimitLE D P
  lt := inverseLimitLT D P
  le_refl := inverseLimitLE.refl D P
  le_trans := inverseLimitLE.trans D P
  lt_iff_le_not_ge := inverseLimitLT.iff_LE_not_GE D P
  le_antisymm := inverseLimitLE.antisymm D P

end InverseLimit

end DomainTheory.ContinuousLattice
```

Coordinate infima ✓ For $S \subseteq D_\infty = \mathrm{InverseLimit}\, D\, P$, a natural candidate for an infimum in D_∞ is built **coordinate by coordinate**: at index n, take the infimum in D_n of the n-th coordinates of points in S.

Definition (`inverseLimitSInfCoe`). For **`S : Set (InverseLimit D P)`**,

$$(\mathtt{inverseLimitSInfCoe}\, D\, P\, S)_n = \inf\{\, x_n \mid x \in S \,\}$$

in D_n (Lean: **`sInf ((fun x => x.1 n) '' S)`**).

In the namespace **`inverseLimitSInfCoe`** we have

Theorem (`apply`). *For all **`S`**, **`n`**, the **n-th coordinate of** `inverseLimitSInfCoe D P S`** is that stage infimum:*

$$\texttt{inverseLimitSInfCoe}\, D\, P\, S\, n = \inf\{\, x_n \mid x \in S \,\}.$$

Proof. Definition of **`inverseLimitSInfCoe`**. □

inverseLimitSInfCoe.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.InverseLimit

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

/-- At index `n`, the infimum in `D n` of the `n`-th coordinates of `S`. -/
noncomputable def inverseLimitSInfCoe (S : Set (InverseLimit D P)) : ∀ n, D n :=
  fun n => sInf ((fun x : InverseLimit D P => x.1 n) '' S)

namespace inverseLimitSInfCoe

@[simp] theorem apply (S : Set (InverseLimit D P)) (n : ℕ) :
    inverseLimitSInfCoe D P S n = sInf ((fun x : InverseLimit D P => x.1 n) '' S) :=
  rfl

end inverseLimitSInfCoe

end InverseLimit

end DomainTheory.ContinuousLattice
```

Set infimum on the inverse limit ✓ For $S \subseteq D_\infty = \mathrm{InverseLimit}\, D\, P$, Coordinate infima **`inverseLimitSInfCoe D P S`** is the coordinatewise infimum in each D_n. The **set infimum `sInf S`** in D_∞ is that tuple, once it is a compatible sequence.

Definition (`instInfSet`). **`instInfSet D P`** is the **`InfSet`** instance

$$\texttt{sInf}\, S = \big\langle \texttt{inverseLimitSInfCoe}\, D\, P\, S,\ \text{compatibility proof} \big\rangle.$$

In the namespace **`instInfSet`** we have

Theorem (`retr_sInf`). *For **`n`**, **`A : Set (D (n + 1))`**,*

$$(P_n).\mathrm{retr}\,(\inf A) = \inf\big((P_n).\mathrm{retr}\,''A\big).$$

Proof. **tower_step_galoisConnection** and **sInf_image**. □

Theorem (compatible_sInf). *For every* ***S : Set (InverseLimit D P)***, ***inverseLimitSInfCoe D P S*** *satisfies* ***Compatible***.

Proof. At index **n**, rewrite with **retr_sInf** and compatibility **x.2 n** for **x ∈ S**. □

Theorem (coe_sInf). *For all* ***S****, the underlying coordinates of* ***sInf S*** *are* ***inverseLimitSInfCoe D P S:***

$$((\mathtt{sInf}\,S) : \forall n,\, D_n) = \mathtt{inverseLimitSInfCoe}\,D\,P\,S.$$

Proof. Definition of **instInfSet**. □

Theorem (isGLB_sInf'). *For all* ***S****,* ***sInf S*** *is the greatest lower bound of* ***S*** *in the partial order on* D_∞.

Proof. Coordinatewise **sInf_le** and **le_sInf**. □

instInfSet.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitPartialOrder
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitSInfCoe
import DomainTheory.ContinuousLattice.InverseLimits.tower_step_galoisConnection

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

namespace instInfSet

theorem retr_sInf (n : ℕ) (A : Set (D (n + 1))) :
    (P n).retr (sInf A) = sInf ((P n).retr '' A) := by
  rw [(tower_step_galoisConnection D P n).u_sInf, sInf_image]

theorem compatible_sInf (S : Set (InverseLimit D P)) :
    Compatible D P (inverseLimitSInfCoe D P S) := by
  intro n
  rw [inverseLimitSInfCoe, inverseLimitSInfCoe, retr_sInf]
  congr 1
  rw [Set.image_image]
  exact Set.image_congr (by rintro x hx; exact x.2 n)

end instInfSet
```

```
noncomputable instance instInfSet : InfSet (InverseLimit D P) :=
  ⟨fun S => ⟨inverseLimitSInfCoe D P S, instInfSet.compatible_sInf D P S⟩⟩

namespace instInfSet

theorem coe_sInf (S : Set (InverseLimit D P)) :
    ((sInf S : InverseLimit D P) : ∀ n, D n) = inverseLimitSInfCoe D P S := rfl

theorem isGLB_sInf' (S : Set (InverseLimit D P)) :
    @IsGLB (InverseLimit D P)
      (inverseLimitPartialOrder D P).toPreorder.toLE S (sInf S) := by
  constructor
  · intro x hx n
    exact sInf_le (Set.mem_image_of_mem _ hx)
  · intro b hb n
    refine le_sInf ?_
    rintro _ ⟨x, hx, rfl⟩
    exact hb hx n

end instInfSet

end InverseLimit

end DomainTheory.ContinuousLattice
```

Complete lattice on the inverse limit ✓ Write $D_\infty = \mathrm{InverseLimit}\, D\, P$ with the coordinatewise order from **`inverseLimitLE`**. A **complete lattice** is a partially ordered set in which **every** subset S has a **greatest lower bound** (infimum, written $\inf S$ or $\bigwedge S$) and a **least upper bound** (supremum, $\sup S$ or $\bigvee S$).

What `sInf`** is.** For $S \subseteq D_\infty$, **`sInf S`** is Lean's notation for that **set infimum** in D_∞: the **largest** element $y \in D_\infty$ such that $y \le x$ for every $x \in S$. Concretely it is the compatible sequence whose n-th coordinate is $\inf\{\, x_n : x \in S \,\}$ in the stage lattice D_n (see **`instInfSet`** and **`instInfSet.isGLB_sInf'`**).

Theorem (`instCompleteLattice`). *D_∞ is a complete lattice.*

Proof. We already have a partial order on D_∞ and, for each $S \subseteq D_\infty$, an element **`sInf S`** that is the **greatest lower bound** of S (**`instInfSet.isGLB_sInf'`**). A standard order-theoretic fact is then enough: **if every subset has an infimum, the poset is a complete lattice**. Define suprema from infima by the usual dual recipe— for $S \subseteq D_\infty$, take the infimum of the set of **upper bounds** of S:

$$\sup S \;=\; \inf\{\, u \in D_\infty \mid \forall x \in S,\ x \le u \,\}.$$

That infimum exists by the construction above, and it is the least upper bound of S. Finite meets and joins agree with this inf / sup. Lean packages this construction as **`instCompleteLattice`**, applying Mathlib's **`completeLatticeOfInf`** to the partial order and the **`isGLB_sInf'`** proof. □

Definition (`instCompleteLattice`). **`instCompleteLattice D P`** is the **`CompleteLattice`** instance on **`InverseLimit D P`** obtained in this way (one declaration in **`instCompleteLattice.lean`**).

`instCompleteLattice.lean`

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.instInfSet

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

/-- **Scott 1972, §4.** Complete lattice structure on compatible sequences. -/
noncomputable instance instCompleteLattice : CompleteLattice (InverseLimit D P) :=
  @completeLatticeOfInf (InverseLimit D P) (inverseLimitPartialOrder D P)
    inferInstance (instInfSet.isGLB_sInf' D P)

end InverseLimit

end DomainTheory.ContinuousLattice
```

Directed suprema are coordinatewise ✓ Write $D_\infty = \mathrm{InverseLimit}\ D\ P$ with the coordinatewise order. D_∞ is a **complete lattice**, so every subset $S \subseteq D_\infty$ has a **least upper bound** (supremum). Lean writes that set supremum as **`sSup S`**; in ordinary notation it is $\sup S$ or $\bigvee S$— the **smallest** $u \in D_\infty$ with $x \le u$ all $x \in S$.

A set $S \subseteq D_\infty$ is **directed** (upward) when for every $x, y \in S$ there exists $z \in S$ with $x \le z$ and $y \le z$. Each stage lattice D_n is a complete lattice, so for nonempty S the coordinate set $\{\, x_n \mid x \in S \,\} \subseteq D_n$ has a supremum there; when S is directed, that coordinatewise family is directed in D_n as well.

Theorem (`coe_sSup_of_directed`). *Suppose $S \subseteq D_\infty$ is **nonempty** and **directed**. For every $n \in \mathbb{N}$, the n-th coordinate of $\sup S$ equals the supremum taken in D_n:*

$$\big(\sup S\big)_n \;=\; \sup\{\, x_n \mid x \in S \,\}.$$

Proof. Define $f(n) \in D_n$ by $f(n) = \sup\{\, x_n \mid x \in S \,\}$ for each $n \in \mathbb{N}$.

Compatibility. A point of D_∞ must satisfy $j_n(f(n+1)) = f(n)$ for each projection $j_n = (P_n).\mathrm{retr}$. Fix n. The set $\{\, x_{n+1} \mid x \in S \,\}$ is a directed nonempty subset of D_{n+1}, so $(P_n).\mathrm{retr}$ preserves its supremum. Rewriting that preservation with the compatibility laws $j_n(x_{n+1}) = x_n$ for $x \in S$ shows $j_n(f(n+1)) = f(n)$.

Least upper bound. Let $p \in D_\infty$ be the compatible sequence f. Every $x \in S$ has $x_n \le f(n)$ for each n, so $x \le p$ in the coordinatewise order. If $b \in D_\infty$ is an upper bound of S, then for each n and each $x \in S$, $x_n \le b_n$, hence $f(n) \le b_n$ and $p \le b$. Thus $p = \sup S$.

Uniqueness of least upper bounds identifies p with **`sSup S`**. □

Use. When a proof compares $\sup$ in D_∞ with data in some D_n, it rewrites $\sup S$ with this theorem so the n-th coordinate is a supremum inside D_n (for example in **`embInf.preservesDirectedSup`**).

coe_sSup_of_directed.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.instCompleteLattice

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

/-- Directed suprema in `InverseLimit` agree with coordinatewise suprema in the product
    . -/
theorem coe_sSup_of_directed (S : Set (InverseLimit D P)) (hSne : S.Nonempty)
    (hSdir : DirectedOn (· ≤ ·) S) :
    ((sSup S : InverseLimit D P) : ∀ n, D n) = sSup (Subtype.val '' S) := by
  have hcompat : Compatible D P (sSup (Subtype.val '' S)) := by
    intro n
    rw [sSup_apply_eq_sSup_image, sSup_apply_eq_sSup_image]
    set A : Set (D (n + 1)) := (fun f : ∀ m, D m => f (n + 1)) '' (Subtype.val '' S)
    with hA
    have hAne : A.Nonempty := (hSne.image _).image _
    have hAdir : DirectedOn (· ≤ ·) A := by
      rintro _ ⟨_, ⟨x, hxS, rfl⟩, rfl⟩ _ ⟨_, ⟨y, hyS, rfl⟩, rfl⟩
      obtain ⟨z, hzS, hxz, hyz⟩ := hSdir x hxS y hyS
      exact ⟨z.1 (n + 1), ⟨z.1, ⟨z, hzS, rfl⟩, rfl⟩, hxz (n + 1), hyz (n + 1)⟩
    rw [(P n).retr.preservesDirectedSup_coe A hAne hAdir]
    congr 1
    rw [hA, Set.image_image]
    exact Set.image_congr (by rintro _ ⟨x, _, rfl⟩; exact x.2 n)
  set p : InverseLimit D P := ⟨sSup (Subtype.val '' S), hcompat⟩ with hp
  have hlub : IsLUB S p := by
    constructor
    · intro x hx
      refine Subtype.coe_le_coe.mp ?_
      exact le_sSup (Set.mem_image_of_mem _ hx)
    · intro b hb
      refine Subtype.coe_le_coe.mp ?_
      refine sSup_le ?_
      rintro _ ⟨x, hx, rfl⟩
      exact Subtype.coe_le_coe.mpr (hb hx)
  rw [(isLUB_sSup S).unique hlub]

end InverseLimit

end DomainTheory.ContinuousLattice
```

embInf.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.iComp
public import DomainTheory.ContinuousLattice.InverseLimits.instCompleteLattice
import DomainTheory.ContinuousLattice.InverseLimits.coe_sSup_of_directed

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

def embInf.fun (n : ℕ) (x : D n) : InverseLimit D P := ⟨iComp D P n x, iComp.compatible
    D P n x⟩

namespace embInf

@[simp] theorem coe (n : ℕ) (x : D n) : (embInf.fun D P n x).1 = iComp D P n x := rfl

theorem monotone (n : ℕ) : Monotone (embInf.fun D P n) := by
  intro x x' hxx
  rw [← Subtype.coe_le_coe]
  intro m
  exact iComp.monotone D P n m hxx

theorem preservesDirectedSup (n : ℕ) : PreservesDirectedSup (embInf.fun D P n) := by
  intro S hS hSdir
  have hTne : (embInf.fun D P n '' S).Nonempty := hS.image _
  have hTdir : DirectedOn (· ≤ ·) (embInf.fun D P n '' S) := by
    rintro _ ⟨a, ha, rfl⟩ _ ⟨b, hb, rfl⟩
    obtain ⟨c, hc, hac, hbc⟩ := hSdir a ha b hb
    exact ⟨embInf.fun D P n c, Set.mem_image_of_mem _ hc,
      embInf.monotone D P n hac, embInf.monotone D P n hbc⟩
  apply Subtype.ext
  rw [coe_sSup_of_directed D P (embInf.fun D P n '' S) hTne hTdir]
  funext m
  have heq : Function.eval m '' (Subtype.val '' (embInf.fun D P n '' S))
      = (fun x => iComp D P n x m) '' S := by
    simp only [Set.image_image, embInf.coe, Function.eval]
  rw [sSup_apply_eq_sSup_image, heq]
  exact iComp.preservesDirectedSup D P n m hS hSdir

end embInf

noncomputable def embInf (n : ℕ) : ScottMap (D n) (InverseLimit D P) :=
  ⟨embInf.fun D P n, PreservesDirectedSup.continuous_of (embInf.preservesDirectedSup D
```

```
    P n)⟩

namespace embInf

theorem succ (n : ℕ) (x : D n) :
    embInf D P (n + 1) ((P n).incl x) = embInf D P n x := by
  apply Subtype.ext
  funext m
  show iComp D P (n + 1) ((P n).incl x) m = iComp D P n x m
  by_cases h1 : n ≤ m
  · by_cases h2 : n + 1 ≤ m
    · rw [iComp.of_le D P h2, iComp.of_le D P h1, embeddingAlongTower.succ_left D P h1
    h2]
    · have hmn : m = n := le_antisymm (Nat.lt_succ_iff.mp (not_le.mp h2)) h1
      subst hmn
      rw [iComp.self, iComp.of_ge D P h2,
        projectionAlongTower.succ D P (le_refl m) (le_of_lt (not_le.mp h2)) ((P m).
    incl x),
        projectionAlongTower.self, (P m).retr_incl]
  · have h2 : ¬ n + 1 ≤ m := fun h => h1 (le_trans (Nat.le_succ n) h)
    rw [iComp.of_ge D P h2, iComp.of_ge D P h1,
      projectionAlongTower.succ D P (le_of_lt (not_le.mp h1)) (le_of_lt (not_le.mp h2)
    ) ((P n).incl x),
      (P n).retr_incl]

theorem le_succ (x : InverseLimit D P) (n : ℕ) :
    embInf D P n (x.1 n) ≤ embInf D P (n + 1) (x.1 (n + 1)) := by
  rw [← succ D P n (x.1 n)]
  exact embInf.monotone D P (n + 1)
    (by calc (P n).incl (x.1 n) = (P n).incl ((P n).retr (x.1 (n + 1))) := by rw [x.2
    n]
          _ ≤ x.1 (n + 1) := (P n).incl_retr_le _)

theorem family_directed (x : InverseLimit D P) :
    DirectedOn (· ≤ ·) (Set.range (fun n => embInf D P n (x.1 n))) :=
  directedOn_range.2 (monotone_nat_of_le_succ (le_succ D P x)).directed_le

end embInf

end InverseLimit

end DomainTheory.ContinuousLattice
```

limitProjectionToLevel.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.instCompleteLattice
import DomainTheory.ContinuousLattice.InverseLimits.coe_sSup_of_directed

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set
```

```
universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

def limitProjectionToLevel.fun (n : ℕ) (y : InverseLimit D P) : D n := y.1 n

namespace limitProjectionToLevel

theorem preservesDirectedSup (n : ℕ) : PreservesDirectedSup (limitProjectionToLevel.
    fun D P n) := by
  intro S hS hSdir
  have hL : (sSup S : InverseLimit D P).1 n = sSup ((fun y : InverseLimit D P => y.1 n
    ) '' S) := by
    rw [coe_sSup_of_directed D P S hS hSdir, sSup_apply_eq_sSup_image]
    congr 1
    rw [Set.image_image]
  exact hL

end limitProjectionToLevel

noncomputable def limitProjectionToLevel (n : ℕ) : ScottMap (InverseLimit D P) (D n)
    :=
  ⟨limitProjectionToLevel.fun D P n,
    PreservesDirectedSup.continuous_of (limitProjectionToLevel.preservesDirectedSup D
    P n)⟩

end InverseLimit

end DomainTheory.ContinuousLattice
```

coconeInf.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf

import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))
```

```
variable {D' : Type*} [CompleteLattice D']

def coconeInf (f : ∀ n, ScottMap (D n) D') (x : InverseLimit D P) : D' :=
  ⋃ n, f n (x.1 n)

namespace coconeInf

theorem apply (f : ∀ n, ScottMap (D n) D') (x : InverseLimit D P) :
    coconeInf D P f x = ⋃ n, f n (x.1 n) := rfl

theorem climb (f : ∀ n, ScottMap (D n) D')
    (hf : ∀ n x, f n x = f (n + 1) ((P n).incl x)) {n : ℕ} (x : D n) :
    ∀ {m : ℕ} (h : n ≤ m), f m (embeddingAlongTower D P h x) = f n x := by
  intro m h
  induction m, h using Nat.le_induction with
  | base => rw [embeddingAlongTower.self]
  | succ k hk ih =>
      rw [embeddingAlongTower.succ D P hk (Nat.le_succ_of_le hk), ← hf k, ih]

theorem descend (f : ∀ n, ScottMap (D n) D')
    (hf : ∀ n x, f n x = f (n + 1) ((P n).incl x)) {m : ℕ} :
    ∀ {n : ℕ} (h : m ≤ n) (x : D n), f m (projectionAlongTower D P h x) ≤ f n x := by
  intro n h
  induction n, h using Nat.le_induction with
  | base =>
      intro x
      exact le_of_eq (congrArg (f m) (projectionAlongTower.self D P (le_refl m) x))
  | succ k hk ih =>
      intro x
      rw [projectionAlongTower.succ D P hk (Nat.le_succ_of_le hk)]
      calc f m (projectionAlongTower D P hk ((P k).retr x)) ≤ f k ((P k).retr x) := ih
     ((P k).retr x)
        _ = f (k + 1) ((P k).incl ((P k).retr x)) := hf k _
        _ ≤ f (k + 1) x := (f (k + 1)).monotone ((P k).incl_retr_le x)

theorem comp_embInf (f : ∀ n, ScottMap (D n) D')
    (hf : ∀ n x, f n x = f (n + 1) ((P n).incl x)) (n : ℕ) (x : D n) :
    coconeInf D P f (embInf D P n x) = f n x := by
  apply le_antisymm
  · show (⋃ m, f m ((embInf D P n x).1 m)) ≤ f n x
    refine iSup_le fun m => ?_
    show f m (iComp D P n x m) ≤ f n x
    by_cases h : n ≤ m
    · rw [iComp.of_le D P h]; exact le_of_eq (climb D P f hf x h)
    · rw [iComp.of_ge D P h]; exact descend D P f hf (le_of_lt (not_le.mp h)) x
  · refine le_trans (le_of_eq ?_) (le_iSup (fun m => f m ((embInf D P n x).1 m)) n)
    rw [show (embInf D P n x).1 n = x from iComp.self D P n x]

theorem preservesDirectedSup (f : ∀ n, ScottMap (D n) D') :
    PreservesDirectedSup (coconeInf D P f) := by
  intro S hS hSdir
  have hev : ∀ n, DirectedOn (· ≤ ·) ((fun s : InverseLimit D P => s.1 n) '' S) := by
    intro n
    rintro _ ⟨a, ha, rfl⟩ _ ⟨b, hb, rfl⟩
    obtain ⟨c, hc, hac, hbc⟩ := hSdir a ha b hb
```

```
    exact ⟨c.1 n, ⟨c, hc, rfl⟩, hac n, hbc n⟩
  have key : ∀ n, f n ((sSup S).1 n) = sSup ((fun s : InverseLimit D P => f n (s.1 n))
    '' S) := by
    intro n
    have h1 : (sSup S).1 n = sSup ((fun s : InverseLimit D P => s.1 n) '' S) :=
      (limitProjectionToLevel.preservesDirectedSup D P n) hS hSdir
    rw [h1, (f n).preservesDirectedSup_coe _ (hS.image _) (hev n), Set.image_image]
  show (⋃ n, f n ((sSup S).1 n)) = sSup (coconeInf D P f '' S)
  simp_rw [key, sSup_image', apply]
  rw [iSup_comm]

end coconeInf

end InverseLimit

end DomainTheory.ContinuousLattice
```

1.5.14 Topology of the inverse limit ✓

Write $D_\infty = \mathrm{InverseLimit}\, D\, P$. Scott topologizes each stage lattice D_n; on **all** sequences $(x_n)_{n\in\mathbb{N}}$ the product topology is the Tychonoff product of those Scott topologies. The **inverse limit topology** on D_∞ is the subspace topology inherited from that product: open sets in D_∞ are exactly the intersections of product opens with the set of **compatible** sequences.

Definition (`inverseLimitTopology`). `inverseLimitTopology D P` is

$$\mathcal{T}_\infty \;=\; \Big\{ U \cap D_\infty \;\Big|\; U \text{ open in } \prod_{n\in\mathbb{N}} (D_n,\ \text{Scott}) \Big\},$$

implemented as `TopologicalSpace.induced Subtype.val` from the Pi topology with `scottTopologicalSpace` on each factor.

In the namespace `inverseLimit` we have

Theorem (`coordinate_continuous`). *For each* `n`*, the coordinate map* `x ↦ x_n` *is continuous from* `inverseLimitTopology` *to Scott on* D_n.

Proof. Open sets in the product are detected coordinatewise; preimages factor through `continuous_apply`. □

Theorem (`t0Space`). $(D_\infty, \mathcal{T}_\infty)$ *is* T_0.

Proof. `Subtype.val` is an embedding into a product of T_0 spaces. □

Theorem (`specializationPreorder_iff`). *For* `x, y : InverseLimit D P`*, specialization preorder in* `inverseLimitTopology` *agrees with coordinatewise* $\le$*:*

$$x \preceq y \iff x \le y.$$

Proof. Compare `specializes` along the embedding into the product; at each index use Scott specialization on D_n. □

Theorem (`isInjectiveSpace`). *If each* `D n` *is a continuous lattice, then* $(D_\infty, \mathcal{T}_\infty)$ *is an* ***injective space*** *(Scott's §1 notion).*

Proof. Given a continuous `f : X → D_\infty` from a compact Hausdorff `X`, read coordinates `f_n`, extend each by `scottExtend`, check compatibility with `lemma_3_9`, assemble the extension map into D_∞, and compare on coordinates with `scottExtend_eq_of_continuous`. □

Theorem (`scottTopology_eq_induced_pi`). *When each stage is a continuous lattice, the* ***Scott topology `scottTopologicalSpace`*** *on D_∞* ***equals `inverseLimitTopology`****.*

Proof. **`isInjectiveSpace`** and **`specializationPreorder_iff`** pin down the Scott topology on an injective space; apply **`continuousLattice_scottTopology_of_injective`**. □

Theorem (`eq_iSup`). *Every* ***`x : InverseLimit D P`*** *is the supremum of its approximants along embeddings:*

$$x = \bigvee_{n \in \mathbb{N}} i_{n\infty}(x_n).$$

Proof. The family $\{\, i_{n\infty}(x_n) \mid n \in \mathbb{N} \,\}$ is directed; compare coordinates using **`coe_sSup_of_directed`**, **`embInf.family_directed`**, and **`iComp`**. □

In the namespace **`inverseLimitTopology`** we have

Theorem (`limitProjectionToLevel`). *Each* ***`limitProjectionToLevel n`*** *($j_{\infty n}$) is continuous.*

Proof. Same as **`coordinate_continuous`**. □

Theorem (`embInf`). *If stages are continuous lattices, each* ***`embInf n`*** *($i_{n\infty}$) is continuous into* ***`inverseLimitTopology`****.*

Proof. Rewrite with **`scottTopology_eq_induced_pi`**; use the **`ScottMap`** instance on **`embInf`**. □

Theorem (`coconeInf`). *Under the same hypothesis,* ***`coconeInf f`*** *is continuous from* ***`inverseLimitTopology`***

Proof. Again identify Scott with **`inverseLimitTopology`**, then **`PreservesDirectedSup.continuous_of`** and **`coconeInf.preservesDirectedSup`**. □

inverseLimitTopology.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
import DomainTheory.ContinuousLattice.InverseLimits.coe_sSup_of_directed
public import DomainTheory.ContinuousLattice.InverseLimits.coconeInf
public import DomainTheory.ContinuousLattice.Specialization.SpecializationPreorder
public import DomainTheory.ContinuousLattice.Injective.InjectiveSpace
import DomainTheory.ContinuousLattice.Constructions.scottExtend_continuous
import DomainTheory.ContinuousLattice.Constructions.scottExtend_eq_of_continuous
import DomainTheory.ContinuousLattice.ContinuousLattices.
    continuousLattice_scottTopology_of_injective
import DomainTheory.ContinuousLattice.ContinuousLattices.lemma_3_9

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set
universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))
```

```
@[reducible] noncomputable def inverseLimitTopology : TopologicalSpace (InverseLimit D
     P) :=
  TopologicalSpace.induced (Subtype.val : InverseLimit D P → ∀ n, D n)
    (@Pi.topologicalSpace ℕ D (fun _ => scottTopologicalSpace))

namespace inverseLimit

theorem coordinate_continuous (n : ℕ) :
    @Continuous (InverseLimit D P) (D n) (inverseLimitTopology D P)
      scottTopologicalSpace (fun x => x.1 n) := by
  let : ∀ n, TopologicalSpace (D n) := fun _ => scottTopologicalSpace
  rw [continuous_def]
  intro U hU
  rw [isOpen_induced_iff]
  exact ⟨{x : ∀ n, D n | x n ∈ U},
    (@continuous_apply ℕ D (fun _ => scottTopologicalSpace) n).isOpen_preimage U hU,
    rfl⟩

theorem t0Space :
    @T0Space (InverseLimit D P) (inverseLimitTopology D P) := by
  let : ∀ n, TopologicalSpace (D n) := fun _ => scottTopologicalSpace
  let : ∀ n, T0Space (D n) := fun _ => scottTopologicalSpace.t0Space
  let : TopologicalSpace (InverseLimit D P) := inverseLimitTopology D P
  have hval : Topology.IsEmbedding (Subtype.val : InverseLimit D P → ∀ n, D n) :=
    ⟨⟨rfl⟩, Subtype.val_injective⟩
  exact hval.t0Space

theorem specializationPreorder_iff (x y : InverseLimit D P) :
    @SpecializationPreorder (InverseLimit D P) (inverseLimitTopology D P) x y ↔ x ≤ y
     := by
  let stageOrder : ∀ n, Preorder (D n) := fun _ => inferInstance
  let limitOrder : Preorder (InverseLimit D P) := inferInstance
  let : ∀ n, TopologicalSpace (D n) := fun _ => scottTopologicalSpace
  let : TopologicalSpace (InverseLimit D P) := inverseLimitTopology D P
  let : ∀ n, Preorder (D n) := stageOrder
  let : Preorder (InverseLimit D P) := limitOrder
  have hval : Topology.IsEmbedding (Subtype.val : InverseLimit D P → ∀ n, D n) :=
    ⟨⟨rfl⟩, Subtype.val_injective⟩
  rw [SpecializationPreorder.iff_specializes, ← hval.isInducing.specializes_iff,
    specializes_pi]
  constructor
  · intro h n
    rw [← SpecializationPreorder.scott_iff, SpecializationPreorder.iff_specializes]
    exact h n
  · intro h n
    rw [← SpecializationPreorder.iff_specializes, SpecializationPreorder.scott_iff]
    exact h n

theorem isInjectiveSpace (hD : ∀ n, ContinuousLattice (D n)) :
    @InjectiveSpace.{u, u} (InverseLimit D P) (inverseLimitTopology D P) := by
  let stageOrder : ∀ n, Preorder (D n) := fun _ => inferInstance
  let limitOrder : Preorder (InverseLimit D P) := inferInstance
  let : ∀ n, TopologicalSpace (D n) := fun _ => scottTopologicalSpace
  let : TopologicalSpace (InverseLimit D P) := inverseLimitTopology D P
  let : ∀ n, Preorder (D n) := stageOrder
  let : Preorder (InverseLimit D P) := limitOrder
```

```
  constructor
  intro X Y _ _ e he f
  let fcoord (n : ℕ) (x : X) : D n := (f x).1 n
  have hfcoord (n : ℕ) : @Continuous X (D n) _ scottTopologicalSpace (fcoord n) :=
    (coordinate_continuous D P n).comp f.continuous
  let fbar (n : ℕ) : Y → D n := scottExtend e (fcoord n)
  have hfbar_cont (n : ℕ) :
      @Continuous Y (D n) _ scottTopologicalSpace (fbar n) :=
    scottExtend_continuous (hD n) e (fcoord n)
  have hfbar_compat (y : Y) (n : ℕ) :
      (P n).retr (fbar (n + 1) y) = fbar n y := by
    symm
    exact lemma_3_9 (hD n) (hD (n + 1)) (P n) e he
      (hfcoord n) (hfcoord (n + 1)) (fun x => (f x).2 n |>.symm) y
  let fbarInf (y : Y) : InverseLimit D P :=
    ⟨fun n => fbar n y, hfbar_compat y⟩
  have hfbarInf_cont :
      @Continuous Y (InverseLimit D P) _ (inverseLimitTopology D P) fbarInf := by
    change @Continuous Y (InverseLimit D P) _
      (TopologicalSpace.induced (Subtype.val : InverseLimit D P → ∀ n, D n)
        (@Pi.topologicalSpace ℕ D (fun _ => scottTopologicalSpace))) fbarInf
    rw [continuous_induced_rng]
    exact continuous_pi hfbar_cont
  refine ⟨⟨fbarInf, hfbarInf_cont⟩, fun x => ?_⟩
  apply Subtype.ext
  funext n
  exact scottExtend_eq_of_continuous (hD n) e he (fcoord n) (hfcoord n) x

theorem scottTopology_eq_induced_pi (hD : ∀ n, ContinuousLattice (D n)) :
    (scottTopologicalSpace : TopologicalSpace (InverseLimit D P)) =
      inverseLimitTopology D P := by
  let : TopologicalSpace (InverseLimit D P) := inverseLimitTopology D P
  let : T0Space (InverseLimit D P) := t0Space D P
  exact (continuousLattice_scottTopology_of_injective (isInjectiveSpace D P hD)
    (specializationPreorder_iff D P)).2

theorem eq_iSup (x : InverseLimit D P) :
    x = ⋃ n, embInf D P n (x.1 n) := by
  have hdir := embInf.family_directed D P x
  have hne : (Set.range (fun n => embInf D P n (x.1 n))).Nonempty := Set.
    range_nonempty _
  refine le_antisymm ?_ ?_
  · rw [← Subtype.coe_le_coe]
    have hcoe : ((⋃ n, embInf D P n (x.1 n) : InverseLimit D P)).1
        = sSup (Subtype.val '' Set.range (fun n => embInf D P n (x.1 n))) := by
      rw [← sSup_range]
      exact coe_sSup_of_directed D P _ hne hdir
    rw [hcoe]
    intro m
    have hmem : (embInf D P m (x.1 m)).1
        ∈ Subtype.val '' Set.range (fun n => embInf D P n (x.1 n)) :=
      ⟨embInf D P m (x.1 m), ⟨m, rfl⟩, rfl⟩
    have hle := (le_sSup hmem) m
    rwa [show (embInf D P m (x.1 m)).1 m = x.1 m from iComp.self D P m (x.1 m)] at hle
  · exact iSup_le fun n => by
      rw [← Subtype.coe_le_coe]; intro m; exact iComp.incl_le D P n x m
```

```
end inverseLimit
namespace inverseLimitTopology

theorem limitProjectionToLevel (n : ℕ) :
    @Continuous (InverseLimit D P) (D n) (inverseLimitTopology D P)
      scottTopologicalSpace (DomainTheory.ContinuousLattice.limitProjectionToLevel D P
     n) :=
  inverseLimit.coordinate_continuous D P n

theorem embInf (hD : ∀ n, ContinuousLattice (D n)) (n : ℕ) :
    @Continuous (D n) (InverseLimit D P) scottTopologicalSpace
      (inverseLimitTopology D P) (DomainTheory.ContinuousLattice.embInf D P n) := by
  rw [← inverseLimit.scottTopology_eq_induced_pi D P hD]
  exact (DomainTheory.ContinuousLattice.embInf D P n).continuous

theorem coconeInf (hD : ∀ n, ContinuousLattice (D n))
    {D' : Type*} [CompleteLattice D']
    (f : ∀ n, ScottMap (D n) D') :
    @Continuous (InverseLimit D P) D' (inverseLimitTopology D P)
      scottTopologicalSpace (DomainTheory.ContinuousLattice.coconeInf D P f) := by
  rw [← inverseLimit.scottTopology_eq_induced_pi D P hD]
  exact PreservesDirectedSup.continuous_of
    (DomainTheory.ContinuousLattice.coconeInf.preservesDirectedSup D P f)

end inverseLimitTopology

end InverseLimit

end DomainTheory.ContinuousLattice
```

1.5.15 Proposition 4.1 ✓

4.1 Proposition. Let $\langle D_n, j_n\rangle_{n=0}^{\infty}$ be an inverse system of continuous lattices where each $j_n : D_{n+1} \to D_n$ is a projection. Then the inverse limit space D_∞ is also a continuous lattice.

Proof: We need only show that D_∞ as a T_0-space is injective. So suppose $\{f_\infty : X \to D_\infty\}$ is given and $X \subseteq Y$. Define $f_n : X \to D_n$ by $f_n = j_{\infty n} \circ f_\infty$. Let $\bar{f} * n : Y \to D_n$ be the maximal extension of f_n according to 3.8. Now we can see the point of Lemma 3.9: by this construction we guarantee that $\bar{f}n = j_n \circ \bar{f}n + 1$. Hence the required $\bar{f} * \infty : Y \to D_\infty$ exists. □

I do not know at the time of writing whether this theorem on inverse limits of continuous lattices extends to sequences where, say, the j_n are only retractions. Fortunately, sufficiently many projections exist to make this construction useful. Note that by reference to the product space construction of D_∞, its lattice ordering is given simply by the relation:

$$x \sqsubseteq y \quad \text{iff} \quad x_n \sqsubseteq y_n \text{ for all } n.$$

proposition_4_1.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.instCompleteLattice
```

```
import DomainTheory.ContinuousLattice.ContinuousLattices.
    continuousLattice_scottTopology_of_injective
import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]
variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

theorem proposition_4_1 (hD : ∀ n, ContinuousLattice (D n)) :
    ContinuousLattice (InverseLimit D P) := by
  let : TopologicalSpace (InverseLimit D P) := inverseLimitTopology D P
  let : T0Space (InverseLimit D P) := inverseLimit.t0Space D P
  exact (continuousLattice_scottTopology_of_injective (inverseLimit.isInjectiveSpace D
     P hD)
    (inverseLimit.specializationPreorder_iff D P)).1

end InverseLimit
end DomainTheory.ContinuousLattice
```

1.5.16 Proposition 4.2 ✓

4.2 Proposition. Let $\langle D_n, j_n\rangle_{n=0}^{\infty}$ and D_∞ be as in 4.1. Then the maps $j_{\infty\{n} : D_\infty \to D_n\}$ are projections.

Proof: The projections $j_n : D_{n+1} \to D_n$, as we know, have their uniquely determined inverses $i_n : D_n \to D_{n+1}$. We can define $\{i_{n\infty} : D_n \to D_\infty\}$ by the equation:

$$i_{n\infty}(x) = \langle y_m\rangle_{m=0}^{\infty}$$

where

$$y_m = \begin{cases} j_m(y_{m+1}) & \text{if } m < n, \\ x & \text{if } m = n, \\ i_m(y_{m-1}) & \text{if } m > n. \end{cases}$$

The proof that $i_{n\infty}$ and $j_{\infty n}$ form a projection is now an easy computation. □

Definition (`limitLevelProjection`). For **`n : ℕ`**, **`limitLevelProjection D P n`** is the **continuous lattice projection** from D_n to $D_\infty = \mathrm{InverseLimit}\, D\, P$ with

- **`incl`** $= i_{n\infty} =$ **`embInf D P n`**
- **`retr`** $= j_{\infty n} =$ **`limitProjectionToLevel D P n`**

The retraction law **`retr_incl`** is **`iComp.self`** at index **`n`**; **`incl_retr_le`** is coordinatewise **`iComp.incl_le`**.

Theorem (`proposition_4_2`). *For every* ***`n`****, there is a continuous lattice projection from D_n to D_∞ whose retraction is $j_{\infty n}$ and whose inclusion is $i_{n\infty}$—equivalently,* ***`Nonempty (ContinuousLatticeProjection (D n) (InverseLimit D P))`****, witnessed by* ***`limitLevelProjection D P n`****.*

Proof. **`limitLevelProjection D P n`**. □

One should note also the recursion equation:

$$i_{n\infty} = i_{(n+1)\infty} \circ i_n.$$

These maps also make it possible to state this useful equation:

$$x = \bigsqcup_{n=0}^{\infty} i_{n\infty}(x_n),$$

where $x \in D_\infty$. It is easy to check that this is a monotone lub, and so we can say each $x \in D_\infty$ is the limit of its projections x_n. In fact, from what we know about projections, x_n is the best possible approximation to x in the space D_n.

proposition_4_2.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel

@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]

variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

/-- Scott?s $\{ i_{n\infty} : D_n \to D_\infty \}$ and $j_{\infty \{ n} : D_\infty \to
    D_n \}$ as one
`ContinuousLatticeProjection`. -/
noncomputable def limitLevelProjection (n : ℕ) :
    ContinuousLatticeProjection (D n) (InverseLimit D P) where
  incl := embInf D P n
  retr := limitProjectionToLevel D P n
  retr_incl x := iComp.self D P n x
  incl_retr_le y := by
    rw [← Subtype.coe_le_coe]
    intro m
    exact iComp.incl_le D P n y m

/-- **Scott 1972, Proposition 4.2.** Each $j_{\infty n}$ is a projection (with inverse
    $i_{n\infty}$). -/
theorem proposition_4_2 (n : ℕ) :
```

```
    Nonempty (ContinuousLatticeProjection (D n) (InverseLimit D P)) :=
  ⟨limitLevelProjection D P n⟩

end InverseLimit

end DomainTheory.ContinuousLattice
```

1.5.17 Corollary 4.3 ✓

4.3 Corollary. Let the spaces be as in 4.1 and 4.2. Let D' be any complete lattice and suppose continuous functions $f_n : D_n \to D'$ are given so that $f_n = f_{n+1} \circ i_n$. Then we can define $\{f_\infty : D_\infty \to D'\}$ by the equation:

$$f_\infty(x) = \bigsqcup_{n=0}^{\infty} f_n(x_n)$$

for $x \in D_\infty$, and we have $f_n = f_\infty \circ i_{n\infty}$. □

The import of this last result is that within the category of complete lattices, the space D_∞ is not only the inverse limit of the D_n, but it is also the *direct* limit. (One system of spaces here uses the j_n as connecting maps, the other the i_n.) This is the algebraic result that lies at the heart of our main result about inverse limits of function spaces.

Turning to function spaces, let $D = D_0$ be a given continuous lattice. As we have seen in 3.13, there are many ways of making D_0 a projection of $D_1 = [D_0 \to D_0]$. Choose one such given by a pair i_0, j_0. Define recursively:

$$D_{n+1} = [D_n \to D_n]$$

and introduce the pairs i_{n+1}, j_{n+1} making D_{n+1} a projection of D_{n+2} by the method of 3.7. Specifically we shall have for $x \in D_{n+1}$ and $x' \in D_{n+2}$:

$$i_{n+1}(x) = i_n \circ x \circ j_n,$$

$$j_{n+1}(x') = j_n \circ x' \circ i_n.$$

Since these spaces are more than continuous lattices being function spaces, it is interesting to note that the maps i_n preserve function value as an algebraic operation as follows:

$$i_n(f(x)) = i_{n+1}(f)(i_n(x)),$$

where $x \in D_n$ and $f \in D_{n+1}$. Thus in passing to the limit space D_∞ something of functional application must also be preserved. The precise result shows that indeed D_∞ becomes its own function space.

corollary_4_3.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf

import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
```

```
@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]
variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))
variable {D' : Type*} [CompleteLattice D']

theorem corollary_4_3 (f : ∀ n, ScottMap (D n) D')
    (hf : ∀ n x, f n x = f (n + 1) ((P n).incl x)) :
    ∃! g : ScottMap (InverseLimit D P) D', ∀ n x, f n x = g (embInf D P n x) := by
  refine ⟨⟨coconeInf D P f,
    PreservesDirectedSup.continuous_of (coconeInf.preservesDirectedSup D P f)⟩, ?_, ?_⟩
  · exact fun n x => (coconeInf.comp_embInf D P f hf n x).symm
  · intro g hg
    ext x

    calc g x = g (⋃ n, embInf D P n (x.1 n)) := by rw [← inverseLimit.eq_iSup D P x]
      _ = g (sSup (Set.range fun n => embInf D P n (x.1 n))) := by rw [sSup_range]
      _ = sSup (g '' Set.range fun n => embInf D P n (x.1 n)) :=
          g.preservesDirectedSup_coe _ (Set.range_nonempty _) (embInf.family_directed
    D P x)
      _ = ⋃ n, g (embInf D P n (x.1 n)) := by rw [← Set.range_comp, sSup_range]; rfl
      _ = ⋃ n, f n (x.1 n) := by simp_rw [← hg]

end InverseLimit
end DomainTheory.ContinuousLattice
```

1.5.18 The function space tower

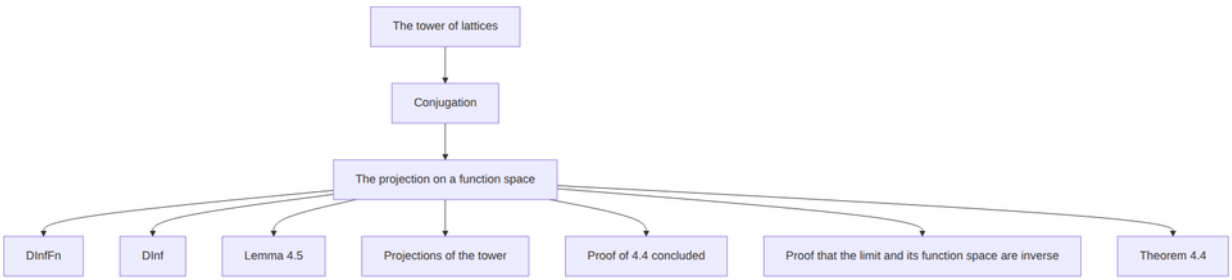

Figure 16: The function space tower.

The tower of lattices `CLat.lean`

```
module
```

```
public import Mathlib.Order.CompleteLattice.Defs

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

universe u

namespace DomainTheory.ContinuousLattice

structure CLat : Type (u + 1) where
  carrier : Type u
  [str : CompleteLattice carrier]

attribute [instance] CLat.str

namespace CLat

noncomputable def tower (D₀ : CLat.{u}) : ℕ → CLat.{u}
  | 0 => D₀
  | (n + 1) => ⟨ScottMap (CLat.tower D₀ n).carrier (CLat.tower D₀ n).carrier⟩

end CLat

def towerType (D₀ : CLat.{u}) (n : ℕ) : Type u := (CLat.tower D₀ n).carrier

noncomputable instance towerCompleteLattice (D₀ : CLat.{u}) (n : ℕ) :
    CompleteLattice (towerType D₀ n) := (CLat.tower D₀ n).str

theorem towerType_succ (D₀ : CLat.{u}) (n : ℕ) :
    towerType D₀ (n + 1) = ScottMap (towerType D₀ n) (towerType D₀ n) := rfl

@[simp] theorem towerType_zero (D₀ : CLat.{u}) : towerType D₀ 0 = D₀.carrier := rfl

def towerToMap {D₀ : CLat.{u}} {n : ℕ} (f : towerType D₀ (n + 1)) :
    ScottMap (towerType D₀ n) (towerType D₀ n) := f

instance towerCoeFun {D₀ : CLat.{u}} {n : ℕ} :
    CoeFun (towerType D₀ (n + 1)) (fun _ => towerType D₀ n → towerType D₀ n) where
  coe f := towerToMap f

@[simp] theorem towerToMap_coe {D₀ : CLat.{u}} {n : ℕ} (f : towerType D₀ (n + 1))
    (x : towerType D₀ n) : towerToMap f x = f x := rfl

end DomainTheory.ContinuousLattice
```

Conjugation conjMap.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.CLat
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
```

```
@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

section Conj

open Set

variable {Y Z W : Type u} [CompleteLattice Y] [CompleteLattice Z] [CompleteLattice W]

def conjMap.fun (post : ScottMap Y Z) (pre : ScottMap W Y) (f : ScottMap Y Y) :
    ScottMap W Z :=
  post.comp (f.comp pre)

namespace conjMap

theorem fun_apply (post : ScottMap Y Z) (pre : ScottMap W Y) (f : ScottMap Y Y) (x : W
    ) :
    conjMap.fun post pre f x = post (f (pre x)) := rfl

theorem preservesDirectedSup (post : ScottMap Y Z) (pre : ScottMap W Y) :
    PreservesDirectedSup (conjMap.fun post pre) := by
  intro F hF hFdir
  apply ScottMap.ext
  intro x
  have hdir : DirectedOn (· ≤ ·) ((fun f : ScottMap Y Y => f (pre x)) '' F) := by
    rintro _ ⟨a, ha, rfl⟩ _ ⟨b, hb, rfl⟩
    obtain ⟨c, hc, hac, hbc⟩ := hFdir a ha b hb
    exact ⟨c (pre x), ⟨c, hc, rfl⟩, hac (pre x), hbc (pre x)⟩
  show post ((sSup F : ScottMap Y Y) (pre x)) = (sSup (conjMap.fun post pre '' F) :
    ScottMap W Z) x
  rw [ScottMap.sSup_apply F (pre x), post.preservesDirectedSup_coe _ (hF.image _) hdir
    ,
    ScottMap.sSup_apply, Set.image_image, Set.image_image]
  rfl

end conjMap

noncomputable def conjMap (post : ScottMap Y Z) (pre : ScottMap W Y) :
    ScottMap (ScottMap Y Y) (ScottMap W Z) :=
  ⟨conjMap.fun post pre, PreservesDirectedSup.continuous_of (conjMap.
    preservesDirectedSup post pre)⟩

namespace conjMap

@[simp] theorem apply (post : ScottMap Y Z) (pre : ScottMap W Y) (f : ScottMap Y Y) (x
     : W) :
    conjMap post pre f x = post (f (pre x)) := rfl

end conjMap

end Conj
```

```
end DomainTheory.ContinuousLattice
```

The projection on a function space `functionSpaceProjection.lean`

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceInclFun
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceRetrFun
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

namespace ContinuousLatticeProjection

theorem functionSpace_inclRetrLe {D D' : Type u} [CompleteLattice D] [CompleteLattice
    D']
    (P : ContinuousLatticeProjection D D') :
    ∀ g, functionSpaceInclFun P (functionSpaceRetrFun P g) ≤ g := by
  intro g
  exact ScottMap.le_def.mpr ((FunctionSpace.projection P P).incl_retr_le g)

theorem functionSpace_retrIncl {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ∀ f, functionSpaceRetrFun P (functionSpaceInclFun P f) = f :=
  (FunctionSpace.projection P P).retr_incl

noncomputable def functionSpace {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ContinuousLatticeProjection (ScottMap D D) (ScottMap D' D') where
  incl := ⟨functionSpaceInclFun P, functionSpaceInclFun.outer_continuous P⟩
  retr := ⟨functionSpaceRetrFun P, functionSpaceRetrFun.outer_continuous P⟩
  retr_incl := functionSpace_retrIncl P
  incl_retr_le := functionSpace_inclRetrLe P

end ContinuousLatticeProjection

end DomainTheory.ContinuousLattice
```

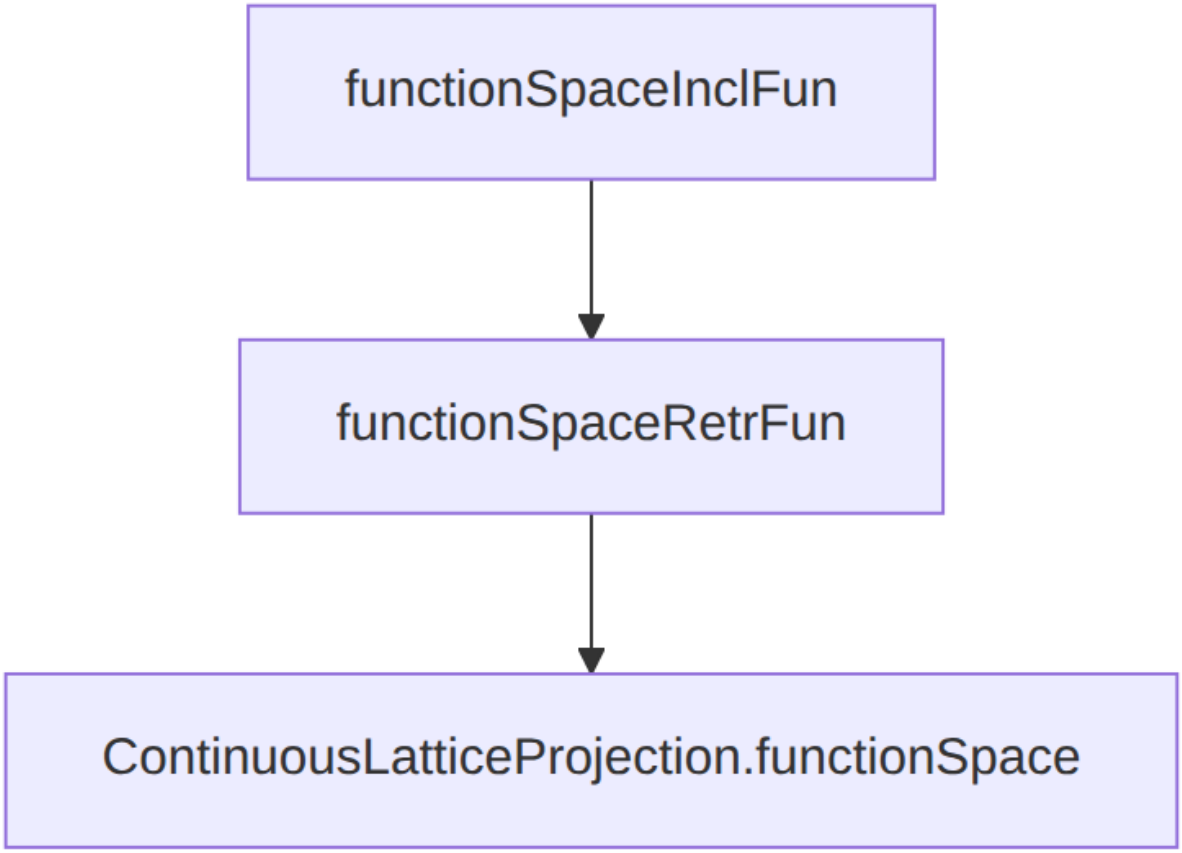

Figure 17: The projection on a function space.

functionSpaceInclFun `functionSpaceInclFun.lean`

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceInclFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) :
    @Continuous D' D' scottTopologicalSpace scottTopologicalSpace
```

```
      (fun x => P.incl (f (P.retr x))) :=
  @Continuous.congr D' D' scottTopologicalSpace scottTopologicalSpace
    (P.incl.comp (f.comp P.retr)).1 (fun x => P.incl (f (P.retr x)))
    (P.incl.comp (f.comp P.retr)).continuous (fun _ => rfl)

end functionSpaceInclFun

def functionSpaceInclFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) : ScottMap D' D' :=
  ⟨fun x => P.incl (f (P.retr x)), functionSpaceInclFun.continuous P f⟩

namespace functionSpaceInclFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D D) (ScottMap D' D')
      scottTopologicalSpace scottTopologicalSpace (functionSpaceInclFun P) := by
  exact @Continuous.congr (ScottMap D D) (ScottMap D' D')
    scottTopologicalSpace scottTopologicalSpace (conjMap P.incl P.retr).1
    (functionSpaceInclFun P) (conjMap P.incl P.retr).continuous
    (fun f => ScottMap.ext fun _ => rfl)

end functionSpaceInclFun

end DomainTheory.ContinuousLattice
```

functionSpaceRetrFun functionSpaceRetrFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceRetrFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') :
    @Continuous D D scottTopologicalSpace scottTopologicalSpace
      (fun x => P.retr (g (P.incl x))) :=
  @Continuous.congr D D scottTopologicalSpace scottTopologicalSpace
    (P.retr.comp (g.comp P.incl)).1 (fun x => P.retr (g (P.incl x)))
    (P.retr.comp (g.comp P.incl)).continuous (fun _ => rfl)

end functionSpaceRetrFun
```

```
def functionSpaceRetrFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') : ScottMap D D :=
  ⟨fun x => P.retr (g (P.incl x)), functionSpaceRetrFun.continuous P g⟩

namespace functionSpaceRetrFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D' D') (ScottMap D D)
      scottTopologicalSpace scottTopologicalSpace (functionSpaceRetrFun P) := by
  exact @Continuous.congr (ScottMap D' D') (ScottMap D D)
    scottTopologicalSpace scottTopologicalSpace (conjMap P.retr P.incl).1
    (functionSpaceRetrFun P) (conjMap P.retr P.incl).continuous
    (fun g => ScottMap.ext fun _ => rfl)

end functionSpaceRetrFun

end DomainTheory.ContinuousLattice
```

ContinuousLatticeProjection.functionSpace

Projections of the tower towerProj.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    functionSpaceProjection
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

noncomputable def towerProj (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) :
    ∀ n, ContinuousLatticeProjection (towerType D₀ n) (towerType D₀ (n + 1))
  | 0 => j₀
  | (n + 1) => ContinuousLatticeProjection.functionSpace (towerProj D₀ j₀ n)

namespace towerProj

theorem succ (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) (n :
     ℕ) :
    let P := towerProj D₀ j₀ n
    (towerProj D₀ j₀ (n + 1)).incl = conjMap P.incl P.retr ∧
      (towerProj D₀ j₀ (n + 1)).retr = conjMap P.retr P.incl := by
  exact ⟨rfl, rfl⟩
```

```
section Tower

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem succ_incl_apply (n : ℕ) (x : towerType D₀ (n + 1)) (y : towerType D₀ (n + 1)) :
    ((towerProj D₀ j₀ (n + 1)).incl x) y
      = (towerProj D₀ j₀ n).incl (x ((towerProj D₀ j₀ n).retr y)) := rfl

theorem succ_retr_apply (n : ℕ) (x' : towerType D₀ (n + 2)) (y : towerType D₀ n) :
    ((towerProj D₀ j₀ (n + 1)).retr x') y
      = (towerProj D₀ j₀ n).retr (x' ((towerProj D₀ j₀ n).incl y)) := rfl

theorem incl_apply (n : ℕ) (f : towerType D₀ (n + 1)) (x : towerType D₀ n) :
    (towerProj D₀ j₀ n).incl (f x)
      = ((towerProj D₀ j₀ (n + 1)).incl f) ((towerProj D₀ j₀ n).incl x) := by
  rw [succ_incl_apply, (towerProj D₀ j₀ n).retr_incl]

end Tower

end towerProj

end DomainTheory.ContinuousLattice
```

DInf DInf.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.InverseLimit
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.InverseLimits.instCompleteLattice

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

abbrev DInf : Type u := InverseLimit (towerType D₀) (towerProj D₀ j₀)

namespace DInf

abbrev fn : Type u := ScottMap (DInf D₀ j₀) (DInf D₀ j₀)

end DInf

end LimitMaps
```

```
end DomainTheory.ContinuousLattice
```

DInfFn

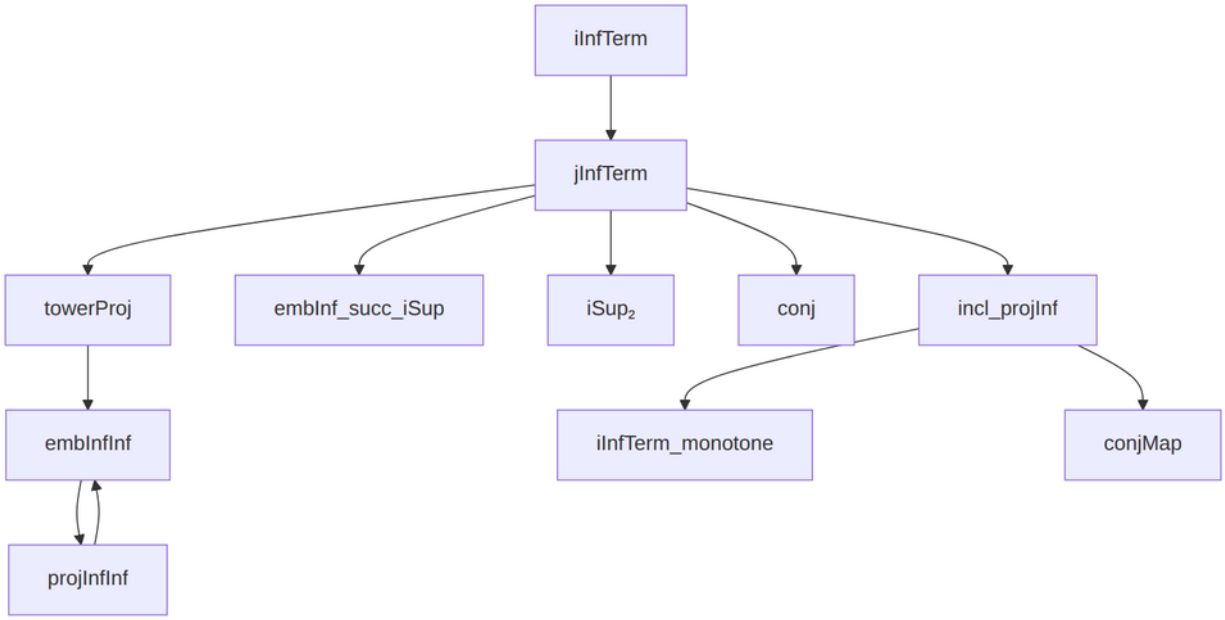

Figure 18: Proof that the limit and its function space are inverse.

Proof that the limit and its function space are inverse

iInfTerm `iInfTerm.lean`

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.DInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))
```

```
noncomputable def iInfTerm (n : ℕ) : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (conjMap (embInf (towerType D₀) (towerProj D₀ j₀) n)
           (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)).comp
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))

namespace iInfTerm

@[simp] theorem apply (n : ℕ) (x z : DInf D₀ j₀) :
    (iInfTerm D₀ j₀ n x) z
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          ((x.1 (n + 1)) ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) z
    )) := rfl

end iInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

embInfInf embInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def embInfInf : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  ⋃ n, iInfTerm D₀ j₀ n

namespace embInfInf

theorem apply (x : DInf D₀ j₀) :
    embInfInf D₀ j₀ x = ⋃ n, iInfTerm D₀ j₀ n x := by
  show (sSup (Set.range (iInfTerm D₀ j₀)) : ScottMap _ _) x = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (embInfInf D₀ j₀ : DInf D₀ j₀ → DInf.fn D₀ j₀) :=
  (proposition_2_5 _).mp (embInfInf D₀ j₀).continuous
```

```
end embInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

jInfTerm jInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def jInfTerm (n : ℕ) : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).comp
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n))

namespace jInfTerm

@[simp] theorem apply (n : ℕ) (f : DInf.fn D₀ j₀) :
    jInfTerm D₀ j₀ n f
      = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                   (embInf (towerType D₀) (towerProj D₀ j₀) n) f) := rfl

end jInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

incl_projInf incl_projInf_le_projInf_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice
```

```
attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem incl_projInf_le_projInf_succ (n : ℕ) (w : DInf D₀ j₀) :
    (towerProj D₀ j₀ n).incl (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
    w)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w := by
  have h := (towerProj D₀ j₀ n).incl_retr_le
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w)
  rwa [show (towerProj D₀ j₀ n).retr (limitProjectionToLevel (towerType D₀) (towerProj
    D₀ j₀) (n + 1) w)
      = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w from w.2 n] at h

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

iInfTerm_monotone iInfTerm_monotone.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))
```

```
theorem iInfTerm_le_succ (x : DInf D₀ j₀) (m : ℕ) :
    iInfTerm D₀ j₀ m x ≤ iInfTerm D₀ j₀ (m + 1) x := by
  rw [ScottMap.le_def]
  intro z
  rw [iInfTerm.apply, iInfTerm.apply,
    ← embInf.succ (towerType D₀) (towerProj D₀ j₀) m
      (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))]
  refine embInf.monotone (towerType D₀) (towerProj D₀ j₀) (m + 1) ?_
  have hab : (towerProj D₀ j₀ m).incl (limitProjectionToLevel (towerType D₀) (towerProj
     D₀ j₀) m z)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z :=
    incl_projInf_le_projInf_succ D₀ j₀ m z
  calc (towerProj D₀ j₀ m).incl
          (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))
      = (towerProj D₀ j₀ m).incl
          (((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2)))
            (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) := by
        rw [show ((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2))) = x.1 (m + 1) from x.2
    (m + 1)]
    _ = (towerProj D₀ j₀ m).incl
          ((towerProj D₀ j₀ m).retr
            (x.1 (m + 2) ((towerProj D₀ j₀ m).incl
              (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)))) := by
        rw [towerProj.succ_retr_apply]
    _ ≤ x.1 (m + 2) ((towerProj D₀ j₀ m).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) :=
        (towerProj D₀ j₀ m).incl_retr_le _
    _ ≤ x.1 (m + 2) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z)
     :=
        ScottMap.monotone (x.1 (m + 2)) hab

theorem iInfTerm_monotone (x : DInf D₀ j₀) : Monotone (fun m => iInfTerm D₀ j₀ m x) :=
  monotone_nat_of_le_succ (iInfTerm_le_succ D₀ j₀ x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

embInf_succ_iSup embInf_succ_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str
```

```
section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInf_succ_iSup (n : ℕ) (f : ℕ → towerType D₀ (n + 1)) (hf : Monotone f) :
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (⋃ m, f m) =
      ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).preservesDirectedSup_coe
      (Set.range f) hne hdir, ← Set.range_comp]
  rfl

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

iSup2 iSup2_monotone_eq_diagonal.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iSup₂_monotone_eq_diagonal {α : Type*} [CompleteLattice α] (f : ℕ → ℕ → α)
    (hfm : ∀ n, Monotone (f n)) (hfn : ∀ m, Monotone (fun n => f n m)) :
    ⋃ n, ⋃ m, f n m = ⋃ n, f n n := by
  apply le_antisymm
```

```
  · refine iSup_le fun n => iSup_le fun m => ?_
    have hk : n ≤ n ⊔ m := le_sup_left
    have hk' : m ≤ n ⊔ m := le_sup_right
    calc f n m ≤ f (n ⊔ m) m := hfn m hk
      _ ≤ f (n ⊔ m) (n ⊔ m) := hfm (n ⊔ m) hk'
      _ ≤ ⨆ n', f n' n' := le_iSup (fun n' => f n' n') (n ⊔ m)
  · refine iSup_le fun n => le_trans (le_iSup (f n) n) (le_iSup (fun n' => ⨆ m, f n' m)
     n)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

conjMap conjMap_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conjMap_iSup (n : ℕ) (post : ScottMap (DInf D₀ j₀) (towerType D₀ n))
    (pre : ScottMap (towerType D₀ n) (DInf D₀ j₀))
    (f : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (hf : Monotone f) :
    conjMap post pre (⨆ m, f m) = ⨆ m, conjMap post pre (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⨆ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (conjMap post pre).preservesDirectedSup_coe (Set.range f) hne hdir, ← Set.
    range_comp]
  rfl

theorem conjMap_incl_le_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).incl
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n) f)
```

```
      ≤ conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f := by
  refine ScottMap.le_def.mpr fun y => ?_
  calc (towerProj D₀ j₀ n).incl
         (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
           (f (embInf (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr y)))
    )
      ≤ (towerProj D₀ j₀ n).incl
         (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
           (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))) := by
       refine (towerProj D₀ j₀ n).incl.monotone
         ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n).monotone (f.
    monotone ?_))
       rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr
    y)]
       exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 1)
         ((towerProj D₀ j₀ n).incl_retr_le y)
    _ ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
         (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y)) :=
       incl_projInf_le_projInf_succ D₀ j₀ n
         (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))

end LimitMaps

end DomainTheory.ContinuousLattice
```

conj conj_iInfTerm_eq.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_2
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conj_iInfTerm_eq (n : ℕ) (x : DInf D₀ j₀) :
    conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
            (embInf (towerType D₀) (towerProj D₀ j₀) n)
            (iInfTerm D₀ j₀ n x) = x.1 (n + 1) :=
```

```
  (FunctionSpace.projection
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)).retr_incl
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

towerProj towerProj_retr_conjMap_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem towerProj_retr_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).retr
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                 (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f)
      = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  apply ScottMap.ext
  intro y
  show (towerProj D₀ j₀ n).retr
      (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl y))))
    = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
        (f (embInf (towerType D₀) (towerProj D₀ j₀) n y))
  rw [embInf.succ (towerType D₀) (towerProj D₀ j₀) n y]
  exact (f (embInf (towerType D₀) (towerProj D₀ j₀) n y)).2 n

end Thm44b

end LimitMaps
```

```
end DomainTheory.ContinuousLattice
```

projInfInf projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInf_succ_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conj_iInfTerm_eq
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm_monotone
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def projInfInf : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  ⋃ n, jInfTerm D₀ j₀ n

namespace projInfInf

theorem apply (f : DInf.fn D₀ j₀) :
    projInfInf D₀ j₀ f = ⋃ n, jInfTerm D₀ j₀ n f := by
  show (sSup (Set.range (jInfTerm D₀ j₀)) : ScottMap _ _) f = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (projInfInf D₀ j₀ : DInf.fn D₀ j₀ → DInf D₀ j₀) :=
  (proposition_2_5 _).mp (projInfInf D₀ j₀).continuous

theorem embInfInf_eq (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = ⋃ n, embInf (towerType D₀) (towerProj D₀ j₀)
    (n + 1) (x.1 (n + 1)) := by
  rw [apply]
  set g := fun n m =>
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
      (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
```

```
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (iInfTerm D₀ j₀ m x)) with hg
have hmono (n : ℕ) : Monotone (fun m =>
    conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
            (embInf (towerType D₀) (towerProj D₀ j₀) n)
            (iInfTerm D₀ j₀ m x)) := fun a b hab =>
  (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
           (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
    (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab))
have hinner (n : ℕ) : jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x) = ⋃ m, g n m := by
  calc jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)
      = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (⋃ m, conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                        (embInf (towerType D₀) (towerProj D₀ j₀) n)
                        (iInfTerm D₀ j₀ m x)) := by
        rw [jInfTerm.apply, embInfInf.apply,
          conjMap_iSup D₀ j₀ n (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀
  ) n)
            (embInf (towerType D₀) (towerProj D₀ j₀) n)
            (fun m => iInfTerm D₀ j₀ m x) (iInfTerm_monotone D₀ j₀ x)]
        rfl
    _ = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
            (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                     (embInf (towerType D₀) (towerProj D₀ j₀) n)
                     (iInfTerm D₀ j₀ m x)) :=
        embInf_succ_iSup D₀ j₀ n _ (hmono n)
    _ = ⋃ m, g n m := by simp only [hg]
have g_mono_m (n : ℕ) : Monotone (g n) := by
  intro a b hab
  rw [hg]
  exact (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).monotone
    ((conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
      (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab)))
have g_mono_n_succ (m n : ℕ) : g n m ≤ g (n + 1) m := by
  rw [hg]
  dsimp only
  rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) (n + 1)
      (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
               (embInf (towerType D₀) (towerProj D₀ j₀) n)
               (iInfTerm D₀ j₀ m x))]
  exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 2)
    (conjMap_incl_le_conjMap_succ D₀ j₀ n (iInfTerm D₀ j₀ m x))
have g_mono_n (m : ℕ) : Monotone (fun n => g n m) :=
  monotone_nat_of_le_succ (g_mono_n_succ m)
have hin : (⋃ n, jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)) = ⋃ n, ⋃ m, g n m := by
  congr 1
  funext n
  exact hinner n
rw [hin, iSup₂_monotone_eq_diagonal g g_mono_m g_mono_n]
congr 1
funext n
rw [hg]
dsimp only
rw [conj_iInfTerm_eq D₀ j₀ n x]
```

```
theorem comp_embInfInf :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro x
  have hmono : Monotone (fun k => embInf (towerType D₀) (towerProj D₀ j₀) k (x.1 k)) :=
    monotone_nat_of_le_succ (embInf.le_succ (towerType D₀) (towerProj D₀ j₀) x)
  rw [ScottMap.comp_apply, ScottMap.idMap_apply, embInfInf_eq D₀ j₀ x,
    Monotone.iSup_nat_add hmono 1]
  exact (inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) x).symm

theorem embInfInf (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = x := by
  have h := congrArg (fun g => g x) (comp_embInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

end projInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

embInfInf embInfInf_projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    towerProj_retr_conjMap_succ
public import DomainTheory.ContinuousLattice.InverseLimits.lemma_4_5
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInfInf_comp_projInfInf :
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro f
  rw [ScottMap.comp_apply, ScottMap.idMap_apply]
  apply ScottMap.ext
```

```
intro z

set r : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀) :=
  fun n => (embInf (towerType D₀) (towerProj D₀ j₀) n).comp
            (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) with hr
have hrw : ∀ n (w : DInf D₀ j₀), r n w
    = embInf (towerType D₀) (towerProj D₀ j₀) n
        (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w) := by
  intro n w
  simp only [hr, ScottMap.comp_apply]
have hr_mono : ∀ (w : DInf D₀ j₀), Monotone (fun m => r m w) := by
  intro w
  refine monotone_nat_of_le_succ (fun m => ?_)
  show r m w ≤ r (m + 1) w
  rw [hrw, hrw]
  exact embInf.le_succ (towerType D₀) (towerProj D₀ j₀) w m

have hA : ∀ (w : DInf D₀ j₀), w = ⋃ m, r m w := by
  intro w
  have h1 : (⋃ m, r m w)
      = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) m
               (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m w) :=
    iSup_congr (fun m => hrw m w)
  rw [h1]
  exact inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) w

have hsup_apply : ∀ (g : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (w : DInf D₀ j₀),
    (⋃ n, g n) w = ⋃ n, g n w := by
  intro g w
  rw [show (⋃ n, g n) = sSup (Set.range g) from sSup_range.symm,
    ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

have hcont : ∀ (g : ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (a : ℕ → DInf D₀ j₀),
    Monotone a → g (⋃ m, a m) = ⋃ m, g (a m) := by
  intro g a ha
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 fun i j => ⟨max i j, ha (le_max_left i j), ha (le_max_right i
  j)⟩
  rw [show (⋃ m, a m) = sSup (Set.range a) from sSup_range.symm,
    g.preservesDirectedSup_coe (Set.range a) (Set.range_nonempty a) hdir,
    ← Set.range_comp, sSup_range]
  rfl

have hpi : projInfInf D₀ j₀ f
    = ⋃ k, embInf (towerType D₀) (towerProj D₀ j₀) (k + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                 (embInf (towerType D₀) (towerProj D₀ j₀) k) f) := by
  rw [projInfInf.apply]
  exact iSup_congr (fun n => jInfTerm.apply D₀ j₀ n f)

have hcoord : ∀ n, (projInfInf D₀ j₀ f).1 (n + 1)
    = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  intro n
  rw [hpi]
```

```
    exact lemma_4_5 (towerType D₀) (towerProj D₀ j₀)
      (fun k => conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                        (embInf (towerType D₀) (towerProj D₀ j₀) k) f)
      (fun m => towerProj_retr_conjMap_succ D₀ j₀ m f) n

  have hev : embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
      = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := by
    rw [embInfInf.apply]
    exact hsup_apply (fun n => iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z

  have hterm : ∀ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z = r n (f (r n z)) := by
    intro n
    rw [hrw, hrw, iInfTerm.apply, hcoord n]
    rfl
  have hmono_frz : Monotone (fun m => f (r m z)) :=
    fun a b hab => f.monotone (hr_mono z hab)
  have hfm : ∀ n, Monotone (fun m => r n (f (r m z))) :=
    fun n _ _ hab => (r n).monotone (f.monotone (hr_mono z hab))
  have hfn : ∀ m, Monotone (fun n => r n (f (r m z))) :=
    fun m => hr_mono (f (r m z))

  have hfz : f z = ⋃ n, r n (f (r n z)) :=
    calc f z = ⋃ k, r k (f z) := hA (f z)
      _ = ⋃ k, r k (f (⋃ m, r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [← hA z]
      _ = ⋃ k, r k (⋃ m, f (r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [hcont f (fun m => r m z) (hr_mono z)]
      _ = ⋃ k, ⋃ m, r k (f (r m z)) :=
            iSup_congr (fun k => hcont (r k) (fun m => f (r m z)) hmono_frz)
      _ = ⋃ n, r n (f (r n z)) :=
            iSup₂_monotone_eq_diagonal (fun n m => r n (f (r m z))) hfm hfn
  calc embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
      = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := hev
    _ = ⋃ n, r n (f (r n z)) := iSup_congr hterm
    _ = f z := hfz.symm

theorem embInfInf_projInfInf (f : DInf.fn D₀ j₀) :
    embInfInf D₀ j₀ (projInfInf D₀ j₀ f) = f := by
  have h := congrArg (fun g => g f) (embInfInf_comp_projInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

theorem embInfInf_le_iff (x y : DInf D₀ j₀) :
    embInfInf D₀ j₀ x ≤ embInfInf D₀ j₀ y ↔ x ≤ y := by
  constructor
  · intro h
    have := (projInfInf D₀ j₀).monotone h
    rwa [projInfInf.embInfInf, projInfInf.embInfInf] at this
  · intro h; exact (embInfInf D₀ j₀).monotone h

end LimitMaps

end DomainTheory.ContinuousLattice
```

Theorem 4.4 4.4 Theorem. *The inverse limit D_∞ of the recursively defined sequence $\langle D_n, j_n\rangle_{n=0}^{\infty}$ of function spaces is not only a continuous lattice, but it is also homeomorphic to its own function space $[D_\infty \to D_\infty]$.*

Proof: We can write down directly the pair of maps i_∞, j_∞ that provide the homeomorphism:

$$i_\infty(x) = \bigsqcup_{n=0}^{\infty}(i_{n\infty} \circ x_{n+1} \circ j_{\infty n}),$$

$$j_\infty(f) = \bigsqcup_{n=0}^{\infty} i_{(n+1)\infty}(j_{\infty n} \circ f \circ i_{n\infty}).$$

Note that these formulae are simply generalizations at the limit for the formulae we used to define i_n, j_n in the first place. Thus it is not surprising that they would provide a projection of $[D_\infty \to D_\infty]$ upon D_∞. Indeed we can compute out $j_\infty(i_\infty(x))$, noting that all the lubs are monotone and that a double monotone limit can always be replaced by a single one in view of the continuity of the operations involved, obtaining

$$j_\infty(i_\infty(x)) = \bigsqcup_{n=0}^{\infty} i_{(n+1)\infty}(j_{\infty n} \circ i_{n\infty} \circ x_{n+1} \circ j_{\infty n} \circ i_{n\infty}) \quad = \bigsqcup_{n=0}^{\infty} i_{(n+1)\infty}(x_{n+1}) = x.$$

In the converse order the calculation is only a bit more complicated. The idea is that since all the functions f are continuous and since the elements x are the limits of their approximations, then each f is actually completely determined by its

In the converse order the calculation is only a bit more complicated. The idea is that since all the functions f are continuous and since the elements x are the limits of their approximations, then each f is actually completely determined by its sequence of restrictions $j_{\infty n} \circ f \circ i_{n\infty} \in D_{n+1}$. This simple idea can be made more precise with the aid of a lemma about D_∞, which allows us in certain cases to recognize projections from limits.

theorem_4_4.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.stepMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.theorem_3_3
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.theorem_4_4_more

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
```

```
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem theorem_4_4_inverses :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap ∧
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap :=
  ⟨projInfInf.comp_embInfInf D₀ j₀, embInfInf_comp_projInfInf D₀ j₀⟩

noncomputable def theorem_4_4_orderIso : OrderIso (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀)).toOrderIso
    (embInfInf D₀ j₀).monotone (projInfInf D₀ j₀).monotone

theorem theorem_4_4 (h₀ : ContinuousLattice D₀.carrier) :
    @ContinuousLattice (DInf D₀ j₀) inferInstance ∧
      Nonempty
        (@Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
          (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
          (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀))) := by
  have hTower : ∀ n, ContinuousLattice (towerType D₀ n) := by
    intro n
    induction n with
    | zero => exact h₀
    | succ n ih => exact stepMap.isContinuousLattice ih ih
  refine ⟨proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower, ?_⟩
  exact ⟨theorem_4_4.sourceTopology_homeomorph D₀ j₀ hTower⟩

end Thm44d
end LimitMaps

end DomainTheory.ContinuousLattice
```

Lemma 4.5 **4.5 Lemma.** Suppose for each n we have $u_{(n+1)} \in D_{n+1}$ and we let:

$$u = \bigsqcup_{n=0}^{\infty} i_{(n+1)\infty}(u_{(n+1)}).$$

Then if

$$j_{n+1}(u_{(n+2)}) = u_{(n+1)}$$

for each n, we can conclude that:

$$j_{\infty(n+1)}(u) = u_{(n+1)}.$$

Proof: If the sequence $u_{(n+1)}$ satisfies the recursion, then the limit defining u is monotonic. Therefore by continuity of projection it suffices to prove that

$$j_{\infty(n+1)}(i_{(m+1)\infty}(u_{(m+1)})) = u_{(n+1)}$$

for all $m \geqslant n$. This is obvious for $m = n$, and it can be readily proved by induction for larger m using the various recursion equations. (Properly speaking the induction is done on the quantity $(m - n)$ using both n and m as variables.) $\square$

lemma_4_5.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.iComp
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.InverseLimits.projectionAlongTower
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]
variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

theorem lemma_4_5 (u : ∀ n, D (n + 1))
    (hu : ∀ n, (P (n + 1)).retr (u (n + 1)) = u n) (n : ℕ) :
    (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P).1 (n + 1) = u n := by
  let a : ℕ → InverseLimit D P := fun k => embInf D P (k + 1) (u k)
  have ha_succ (k : ℕ) : a k ≤ a (k + 1) := by
    rw [show a k = embInf D P (k + 1) (u k) from rfl,
      show a (k + 1) = embInf D P (k + 2) (u (k + 1)) from rfl,
      ← embInf.succ D P (k + 1) (u k)]
    exact embInf.monotone D P (k + 2)
      (by calc (P (k + 1)).incl (u k)
            = (P (k + 1)).incl ((P (k + 1)).retr (u (k + 1))) := by rw [hu k]
          _ ≤ u (k + 1) := (P (k + 1)).incl_retr_le _)
  have ha : Monotone a := monotone_nat_of_le_succ ha_succ
  have hprojTower : ∀ d n : ℕ,
      projectionAlongTower D P (show n + 1 ≤ n + d + 1 by omega) (u (n + d)) = u n :=
    by
    intro d
    induction d with
    | zero =>
        intro n
        simpa only [Nat.add_zero] using
          (projectionAlongTower.self D P (le_refl (n + 1)) (u n))
    | succ d ih =>
        intro n
        simp only [Nat.add_succ]
        rw [projectionAlongTower.succ D P
          (show n + 1 ≤ n + d + 1 by omega)
          (show n + 1 ≤ (n + d + 1) + 1 by omega)]
```

```
      rw [hu (n + d)]
      exact ih n
  have hprojection : ∀ d n : ℕ,
      (embInf D P (n + d + 1) (u (n + d))).1 (n + 1) = u n := by
    intro d n
    cases d with
    | zero =>
      change iComp D P (n + 1) (u n) (n + 1) = u n
      exact iComp.self D P (n + 1) (u n)
    | succ d =>
      change iComp D P (n + (d + 1) + 1) (u (n + (d + 1))) (n + 1) = u n
      rw [iComp.of_ge D P (by omega)]
      exact hprojTower (d + 1) n
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 ha.directed_le
  have hcont := (limitProjectionToLevel D P (n + 1)).preservesDirectedSup_coe
    (Set.range a) (Set.range_nonempty a) hdir
  rw [show (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P)
      = sSup (Set.range a) from sSup_range.symm]
  change (limitProjectionToLevel D P (n + 1)) (sSup (Set.range a)) = u n
  rw [hcont, ← Set.range_comp, sSup_range]
  apply le_antisymm
  · exact iSup_le fun m => by
      by_cases hmn : n ≤ m
      · obtain ⟨d, rfl⟩ := Nat.exists_eq_add_of_le hmn
        exact le_of_eq (hprojection d n)
      · exact le_trans ((ha (Nat.le_of_not_ge hmn)) (n + 1))
          (le_of_eq (hprojection 0 n))
  · exact le_trans (le_of_eq (hprojection 0 n).symm) (le_iSup (fun m => (a m).1 (n + 1)
    ) n)

end InverseLimit
end DomainTheory.ContinuousLattice
```

Proof of 4.4 concluded **Proof of 4.4 concluded:** The lemma applies at once to our calculation, for we find:

$$i_\infty(j_\infty(f)) = \bigsqcup_{n=0}^{\infty}(i_{n\infty}\circ j_{\infty n}\circ f\circ i_{n\infty}\circ j_{\infty n}) \quad = \bigsqcup_{n=0}^{\infty}(i_{n\infty}\circ j_{\infty n})\circ f\circ \bigsqcup_{n=0}^{\infty}(i_{n\infty}\circ j_{\infty n}).$$

Here we have just applied the continuity of f to be able to confine the lub on the right. But now by the remark following 4.2, we note the functional equation:

$$\mathrm{id} = \bigsqcup_{n=0}^{\infty}(i_{n\infty}\circ j_{\infty n}),$$

and the proof that i_∞ and j_∞ are inverse to one another is complete. □

theorem_4_4_more.lean

```
module
```

```
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.scottMapInducedPiTopology

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.scottTopology_homeomorph :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace :=
  @Homeomorph.mk (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace
    (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀))
    (embInfInf D₀ j₀).continuous (projInfInf D₀ j₀).continuous

end Thm44d

end LimitMaps

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.sourceTopology_homeomorph
    (hTower : ∀ n, ContinuousLattice (towerType D₀ n)) :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
      (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
      (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀)) := by
  have hDInf : ContinuousLattice (DInf D₀ j₀) :=
    proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower
  rw [← inverseLimit.scottTopology_eq_induced_pi
```

```
        (towerType D₀) (towerProj D₀ j₀) hTower,
      ← scottMapInducedPiTopology.scottTopology_eq_inducedPi hDInf hDInf]
  exact theorem_4_4.scottTopology_homeomorph D₀ j₀

end Thm44d

end LimitMaps

end DomainTheory.ContinuousLattice
```

1.5.19 The functorial form ✓

We can explain the idea of this proof in other terms using a suggestion made to me by F. W. Lawvere. Consider the category of

We can explain the idea of this proof in other terms using a suggestion made to me by F. W. Lawvere. Consider the category of continuous lattices and projections. In that category our D_∞ is, as we have remarked, both a *direct* and an *inverse* limit. Note too that with regard to projections $[D \to D']$ is a *functor*, for we can also define $[j \to j']$ when the maps are projections. In this language our particular inverse system is defined by the recursion:

$$D_{n+1} = [D_n \to D_n] \quad \text{and} \quad j_{n+1} = [j_n \to j_n],$$

where D_0 and j_0 are given in advance. Now the function space construction is continuous in its two arguments, turning an inverse limit on the right into an inverse limit and a direct limit on the *left* also into an *inverse* limit. A repeated limit can be made into a simple limit, so we can write:

$$D_\infty = \varprojlim \langle D_n, j_n \rangle_{n=0}^{\infty} \quad = \varinjlim \langle D_n, i_n \rangle_{n=0}^{\infty}$$

and

$$[D_\infty \to D_\infty] = \varprojlim \langle [D_n \to D_n], [j_n \to j_n] \rangle_{n=0}^{\infty} \quad = \varprojlim \langle D_{n+1}, j_{n+1} \rangle_{n=0}^{\infty} = D_\infty \quad \textit{(up to isomorphism).}$$

A full checking of the details involved would not make the argument appreciably simpler over the more "element-by-element" argument I have presented. In fact, the proofs are actually the same. But thinking of the result in terms of properties of functors does seem to isolate very well the essential idea and to show how simple it is.

One must only add here a note of caution: the proper choice of category must be done with care. Thus it seems to me that the use of projections rather than arbitrary continuous maps is necessary.

Inasmuch as I have not checked all details in this form, I hope what I say is correct.

1.5.20 Application ✓

Since we have shown $[D_\infty \to D_\infty]$ to be homeomorphic to D_∞, we can begin to regard them as the same. In particular there ought to be some function space structure to transfer to D_∞. This can be done by defining functional application for any elements $x, y \in D_\infty$ by the equation:

$$x(y) = \bigsqcup_{n=0}^{\infty} i_{n\infty}(x_{n+1}(y_n)).$$

Similarly we can define λ-abstraction on continuous expressions:

$$\lambda x.[\ldots x \ldots] = j_\infty(\lambda\{x : D_\infty\}.[\ldots x \ldots]),$$

and in this way D_∞ becomes a model for the λ-calculus of Church and Curry. The model-theoretic and proof-theoretic aspects of this result will be explained in another paper (Scott (1972)).

1.5.21 Two projections ✓

Suppose we were to start with the least, non-trivial lattice $0 = \top, \bot$ for D_0. Now $D_1 = [0 \to 0]$ has exactly three elements and there are just two ways of defining a projection $j_0 : D_1 \to D_0$. They are illustrated in the figure:

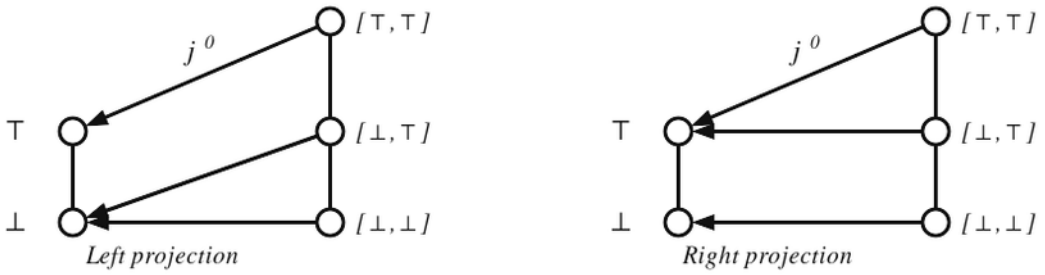

Figure 19: Two j0 projections; D0 on rows 2-3; arrows touch circles.

Hence our construction gives two limit spaces D_∞ and $D' * \infty$. Are they the same? No, they are not. It can be shown, for example, that the $\top$ of $D * \infty$ is *isolated* (that is, $\top \ll \top$), while the same is not true of $D' * \infty$. More interestingly, David Park has proved that the fixed-point operator fix mentioned in 3.14 has algebraic properties in $D * \infty$ quite different from those in $D' * \infty$. By algebraic here, we of course have reference to the functional algebra embodied in the application operation $x(y)$ defined on these limit spaces. Note, by the way, that in view of our isomorphism result we can regard fix (or any other similar continuous function for that matter) as an element of $D * \infty$. This makes the "algebra" of D_∞ quite a rich field for study.

1.5.22 Embedding every space ✓

The reader will have surely remarked that by virtue of 1.5, every T_0-space X whatsoever can be embedded as a subspace in a D_∞. Besides this all the continuous functions on X (oh, into D_∞, say) can be extended to D_∞; whence they can be regarded as *elements* of D_∞. Thus we have been able to embed not only the topology of X into D_∞ but also all of the continuous function theory over X. So far this is only a "logical" construction. For more interesting "mathematical" results we shall have to investigate whether any useful theorems about the usual function spaces $[X \to X]$ can be obtained with the aid of D_∞. This method can easily be employed for real- or complex-valued continuous functions, though it seems more oriented toward pointwise convergence than anything else. Still, there seems to be a chance it might be useful—especially if one wished to consider continuous *operators* on function spaces.

1.5.23 Other functors ✓

The idea of forming the limit space can also be applied to *other* functors besides $[D \to D]$. Thus instead of solving the "equation"

$$D = [D \to D]$$

as we have done with the D_∞ construction, we could also solve:

$$V = T + [V \times V] + [V + V] + [V \to V],$$

for example. Here $T = \bot, 0, 1, \top$ is the four-element lattice with 0 and 1 as incomparable elements. By $[V \times V]$ and $[V \to V]$ we understand the usual Cartesian product and function space construction. The $+$ operator, on the other hand works only in the category of lattices with $\top$ as an isolated element. It is defined so as to make:

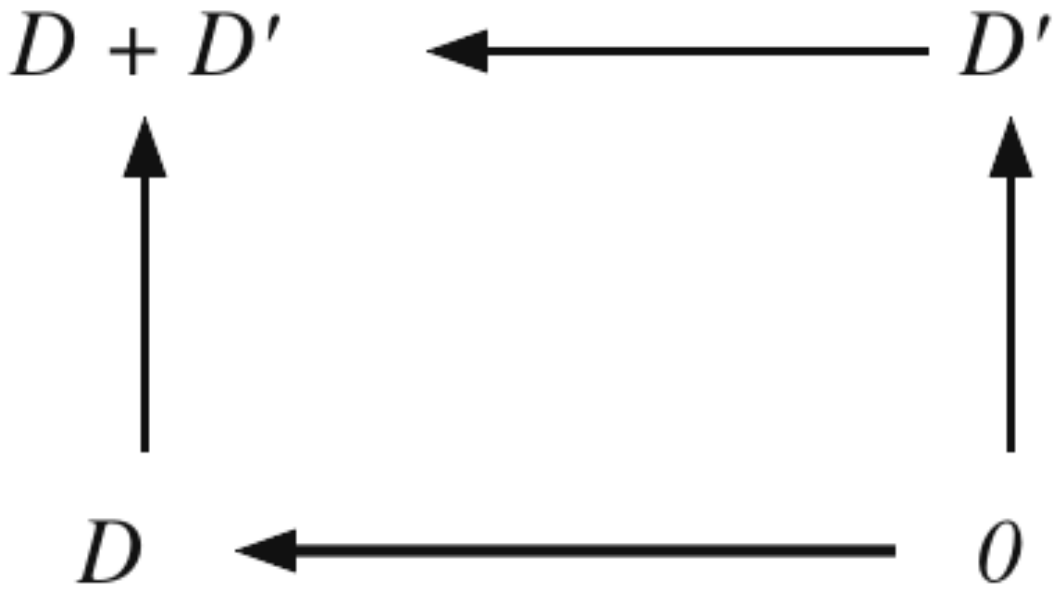

Figure 20: Push-out square: D and D prime map up into D plus D prime, and 0 maps left to D and up to D prime.

a push-out diagram, where the maps from 0 are meant to match $\bot$ with $\bot$ and $\top$ with $\top$. The point of requiring $\top$ to be isolated is that both D and D' become projections of $D + D'$. This construction, though not quite a disjoint union, has many properties in common with that operation on spaces. In particular, if we consider the category with projections as maps, the construction

$$\mathbb{F}(D) = T + [D \times D] + [D + D] + [D \to D]$$

is a *functor*. Furthermore, we can project $\mathbb{F}(T)$ onto T in an obvious way, thereby setting things up for an inverse limit construction:

$$V = \varprojlim \langle \mathbb{F}^n(T), j_n \rangle_{n=0}^{\infty}.$$

The resulting continuous lattice satisfies the desired equation up to isomorphism.

1.5.24 Subspaces of a limit ✓

The space V constructed in the way just indicated is very rich in subspaces. To see this, consider the space $\mathcal{J}_V$ of proper projections j where $j(\top) = \top$. As in 3.12 this is a complete lattice. Now that $[V \times V]$ and $[V + V]$ and $[V \to V]$ are regarded as *subspaces* of this "universe" V itself, we can easily define *continuous operations*

$$(j \times k)\ ,\ (j + k)\ ,\ \text{and}\ (j \to k)$$

on the projections obtaining again elements of $\mathcal{J}_V$. The projections so obtained correspond to the indicated constructions of subspaces, of course. (Indeed, if we had the time and space, we could show that $\mathcal{J}_V$ becomes a very interesting category). There will be a particular

projection t corresponding to T, and reason for doing all this is to show that the existence of subspaces of V can now be established by solving equations in $\mathcal{J}_V$. For example, by the fixed-point construction we could find a $j \in \mathcal{J}_V$ such that

$$j = t + (t \times j) + ((j \times j) \to j).$$

The range of j would then be a subspace $W \subseteq V$ such that W solves the equation:

$$W = T + [T \times W] + [[W \times W] \to W].$$

And these are only a few examples: simultaneous equations are possible, and many other operators are waiting for discovery and application.

1.6 Correction ✓

Correction (Added March, 1972). Robin Milner has pointed out to me that there is an error in the remark in the paragraph immediately preceding Proposition 2.5. I was mistaken in saying that if D is a T_0-space which becomes a complete lattice under its induced partial ordering, then every set open in the given topology is also open in the induced topology. There are many counterexamples to this statement. Let D be any complete lattice. There are two extreme T_0-topologies which will induce the given partial ordering. The smallest such topology has as a sub-base for its open sets those sets of the form:

$$\{x \in D : x \not\sqsubseteq y\}.$$

These sets are easily proved to be open in any T_0-topology which induces the partial ordering. At the other extreme consider sets of the form:

$$\{x \in D : y \sqsubseteq x.\}$$

Such sets will give a base for a T_0-topology that is the maximal topology inducing the given partial ordering. Clearly they need not be open in the induced lattice topology; in particular, they may well fail

to satisfy conditions (ii) on open sets. To make the remark in question correct, we must thus suppose that the given T_0-topology is *contained within* the induced lattice topology. The equation given in the paragraph indicated will then be a sufficient condition for the two topologies to be identical.

The remark was employed in the proof of three different propositions: 2.9, 2.10, and 3.3. In the case of 2.9 one must verify that the product topology is contained within the lattice topology. This need only be done for the basis for the product topology, and for such basic open sets the result needed is obvious. In the case of proposition 2.10 the question concerns a relationship between the topologies of a space and a subspace; the spaces in question are also lattices. Note in passing that a lub in the subspace is generally *larger* in the partial ordering than the corresponding lub relative to the whole space. This puts the inequalities in the wrong direction, and so it is not immediate that a relativized open set for the subspace is open in the lattice topology of the subspace. However, in this case we can appeal to the continuous retraction. Recall that the relativized open sets of the kind that we used in the proof of 2.10 are of the form:

$$U = \{z \in D : x < z\} .$$

Suppose then that S is a directed set, and that using the lub in the sense of D we have

$$\bigsqcup S \in U .$$

Referring back to the proof of 2.10 we know that ($S' = S \subseteq D$, but $\bigsqcup S'$ is the join computed in the ambient lattice D')

$$j(\bigsqcup S') = \bigsqcup S ,$$

which means that

$$x < j(\bigsqcup S') .$$

From this it follows that

$$x < j(z), \text{ some } z \in S .$$

Now $j(z) = z$, and we have what we need. This argument suffices only for a special type of open sets; but these open sets form a base for the topology, and so the argument is quite general.

Turning now to the proof of theorem 2.3 we note that the topology on the function space is simply the *relativized* product topology. There is no difficulty with lubs in this case, because, as we showed in the proof of that theorem, all lubs are calculated pointwise. Thus, it is easy to verify now that the sets open in the product topology are also open in the lattice topology.

2 Datatypes as Lattices (1976)

Dependencies. Each box is one section. Lean ownership is by topic folder. The arrowhead is on the section that imports; the number is how many direct imports. Only paper-forward edges are shown (a later section importing an earlier one). An arrow already implied by a longer path is left out.

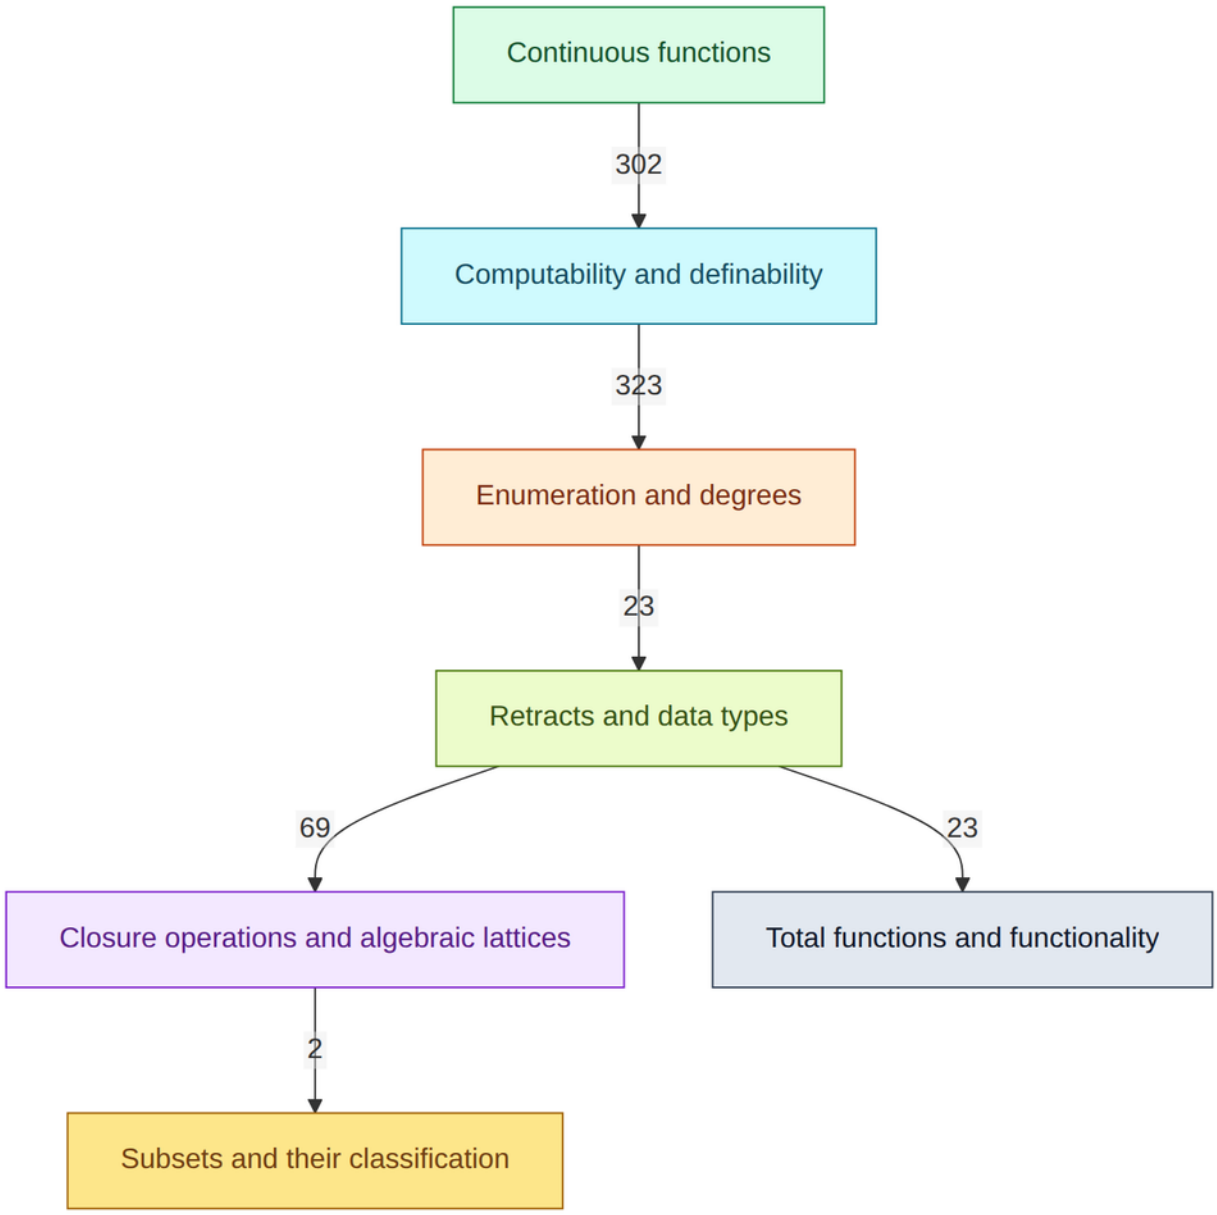

Figure 21: Datatypes as Lattices (1976).

2.1 Introduction

To the Memory of Christopher Strachey, 1916–1975

Abstract. The meaning of many kinds of expressions in programming languages can be taken as elements of certain spaces of "partial" objects. In this report these spaces are modeled in one universal domain $\mathbf{P}\omega$, the set of all subsets of the integers. This domain renders the connection of this semantic theory with the ordinary theory of number theoretic (especially general recursive) functions clear and straightforward.

Key words. programming language semantics, lattice, continuous lattice, algebraic lattice, computability, retract, combinatory logic, lambda calculus, recursion theorem, enumeration degrees, continuous function, fixed-point theorem

Introduction. Investigations begun in 1969 with Christopher Strachey led to the idea that the denotations of many kinds of expressions in programming languages could be taken as elements of certain kinds of spaces of "partial" objects. As these spaces could be treated as function spaces, their structure at first seemed excessively complicated—even impossible. But then the author discovered that there were many more spaces than we had first imagined—even wanted. They could be presented as lattices (or as some prefer, semilattices), and the main technique was to employ topological ideas, in particular the notion of a continuous function. This approach and its applications have been presented in a number of publications, but that part of the foundation concerned with *computability* (in the sense of recursion theory) was never before adequately exposed. The purpose of the present paper is to provide such a foundation and to simplify the whole presentation by a de-emphasis of abstract ideas. An Appendix and the references provide a partial guide to the literature and an indication of connections with other work.

2.1.1 Domain $\mathbf{P}\omega$ ✓

The main innovation in this report is to model everything within one "universal" domain $\mathbf{P}\omega = \{x \mid x \subseteq \omega\}$, the domain of all subsets of the set ω of nonnegative integers. The advantages are many: by the most elementary considerations $\mathbf{P}\omega$ is recognized to be a lattice and a topological space. In fact, $\mathbf{P}\omega$ is a *continuous lattice*, even an *algebraic lattice*, but in the beginning we do not even need to define such an "advanced" concept; we can save these ideas for an *analysis* of what has been done here in a more direct way. Next by taking the set of integers as the basis of the construction, the connection with the ordinary theory of number-theoretic (especially, general recursive) functions can be made clear and straightforward.

Theorem (`topElem.pos`). Some positive numeral belongs to $\top$.

Proof. $1 \in \top$. ■

`Pomega.lean`

```
module -- shake: keep-all

public import Mathlib.Data.Nat.Notation
public import Mathlib.Data.Set.Defs
public import Mathlib.Data.Set.Basic
public import Mathlib.Data.Set.Insert

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

abbrev Pomega := Set ℕ

def botElem : Pomega := ∅

def topElem : Pomega := Set.univ
```

```
@[simp] theorem mem_botElem (n : ℕ) : n ∈ botElem ↔ False := by simp [botElem]

@[simp] theorem mem_topElem (n : ℕ) : n ∈ topElem := Set.mem_univ n

namespace topElem

theorem pos : ∃ n, n + 1 ∈ topElem :=
  ⟨0, Set.mem_univ 1⟩

end topElem

end DomainTheory.DataTypesAsLattices
```

2.1.2 Multiple-valued integers ✓

The model $\mathbf{P}\omega$ can be intuitively viewed as the domain of *multiple-valued* integers; what is new in the presentation is that functions are not only multiple-valued but also "multiple-argumented". This remark is given a precise sense in § 2 below, but the upshot of the idea is that multiple-valued integers are regarded as objects in themselves—possibly infinite—and as something more than just the collection of single integers contained in them. This combination of the finite with the infinite into a single domain, together with the idea that a continuous function can be reduced to its *graph* (in the end, a set of integers), makes it possible to view an $x \in \mathbf{P}\omega$ at one time as a value, at another as an argument, then as an integer, then as a function, and still later as a functional (or combinator). The "paradox" of self-application (as in $x(x)$) is solved by allowing the *same* x to be used in two *different* ways. This is done in ordinary recursion theory via Gödel numbers (as in $\{e\}(e)$), but the advantage of the present theory is that not only is the function concept the *extensional* one, but it includes *arbitrary* continuous functions and not just the computable ones.

Section 1 introduces the elementary ideas on the topology of $\mathbf{P}\omega$ and the continuous functions including the fixed-point theorem. Section 2 has to do with computability and definability. The language LAMBDA is introduced as an extension of the pure λ-calculus by four arithmetical combinators; in fact, it is indicated in § 3 how the whole system could be based on *one* combinator. What is shown is that computability in $\mathbf{P}\omega$ according to the natural definition (which assumes that we already know what a recursively enumerable set of integers is) is equivalent to LAMBDA-definability. The main tool is, not surprisingly, the first recursion theorem formulated with the aid of the so-called *paradoxical combinator* $\mathbf{Y}$. The plan is hardly original, but the point is to work out what it all means in the model.

Along the way we have to show how to give every λ-term a denotation in $\mathbf{P}\omega$; the resulting principles of λ-calculus that are thereby verified are summarized in Table 1. Of these the first three, (α), (β), and (ξ), are indeed valid in the model; however, rule (η), which is a stronger version of extensionality, *fails* in the $\mathbf{P}\omega$ model. This should not be regarded as a disadvantage since the import of (η) is to suppose every object is a function. A quick construction of these special models is indicated at the end of § 5. Since $\mathbf{P}\omega$ is partially ordered by $\subseteq$, there are also laws involving this relation. Law (ξ^*) is an improvement of (ξ); while (μ) is a form of monotonicity for application.

TABLE 1

Some laws of λ-calculus

(α)	$\lambda x.\tau = \lambda y.\tau[y/x]$
(β)	$(\lambda x.\tau)(y) = \tau[y/x]$
(ξ)	$\lambda x.\tau = \lambda x.\sigma \quad \text{if} \quad \forall x.\, \tau = \sigma$

(η)	$y = \lambda x.y(x)$
(ξ^*)	$\lambda x.\tau \subseteq \lambda x.\sigma \quad$ if $\quad \forall x.\,\tau \subseteq \sigma$
(μ)	$x \subseteq y$ and $u \subseteq v$ imply $u(x) \subseteq v(y)$

Section 3 has to do with enumeration and degrees. Gödel numbers for LAMBDA are defined in a very easy way which takes advantage of the notation of combinators. This leads to the second recursion theorem, and results on incompleteness and undecidability follow along standard lines. *Relative recursiveness* is also very easy to define in the system, and we make the tie-in with *enumeration degrees* which correspond to finitely generated combinatory subalgebras of $\mathbf{P}\omega$. Finally a theorem of Myhill and Shepherdson is interpreted as a most satisfactory completeness property for definability in the system.

Sections 4 and 5 show how a calculus of *retracts* leads to quite simple definitions of a host of useful domains (as lattices). Section 6 investigates the classification of other subsets (*nonlattices*) of $\mathbf{P}\omega$; while § 7 contrasts partial (multiple-valued) functions with total functions, and interprets various theories of functionality. Connections with category theory are mentioned.

What is demonstrated in this work is how the language LAMBDA, together with its interpretation in $\mathbf{P}\omega$, is an extremely convenient vehicle for *definitions* of computable functions on complex structures (all taken as subdomains of $\mathbf{P}\omega$). It is a "high-level" programming language for recursion theory. It is *applied* combinatory logic, which in usefulness goes far beyond anything envisioned in the standard literature. What has been shown is how many interesting predicates can be *expressed* as equations between continuous functions. What is needed next is a development of the *proof theory* of the system along the lines of the work of Milner, which incorporates the author's extension of McCarthy's rule of recursion induction to this high-level language. Then we will have a flexible and practical "mathematical" theory of computation.

2.2 Continuous functions

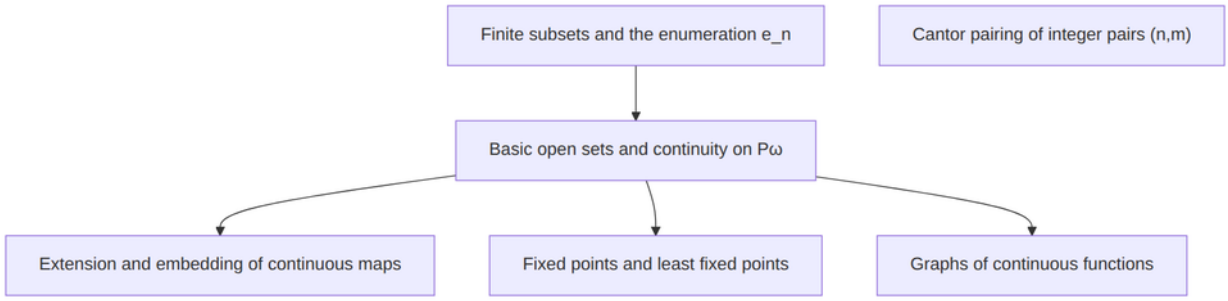

Figure 22: Continuous functions.

2.2.1 Introduction ✓

1. Continuous functions. The domain $\mathbf{P}\omega$ of all subsets of the set ω of nonnegative integers is a complete lattice under the partial ordering $\subseteq$ of set inclusion, as is well known. We use the usual symbols $\cup$, $\cap$, $\bigcup$, $\bigcap$ for the finite and infinite lattice operations of union and intersection. $\mathbf{P}\omega$ is of course also a Boolean algebra; and for complements we write

$$\sim x = \{n \mid n \notin x\}$$

where it is understood that such variables as i, j, k, l, m, n range over *integers in* ω, while u, v, w, x, y, z range over *subsets of* ω.

The domain $\mathbf{P}\omega$ can also be made into a topological space—in many ways. A common method is to match each $x \subseteq \omega$ with the corresponding characteristic function in $\{0,1\}^\omega$, and to take the induced product topology. In this way $\mathbf{P}\omega$ is a totally disconnected compact Hausdorff space homeomorphic to the Cantor "middle-third" set. This is *not* the topology we want; it is a *positive-and-negative* topology which makes the function $\sim x$ continuous. We want a weaker topology: the topology of positive "information", which has the advantage that all continuous functions possess fixed points. (The equation $x = \sim x$ is impossible.) The topology that we *do* want is exactly that appropriate to considering $\mathbf{P}\omega$ to be a continuous lattice. But all this terminology of abstract mathematics is quite unnecessary, since the required definitions can be given in very elementary terms.

For Section 1. If we give the two-point space $\{\bot, \top\}$ the weak T_0-topology with just three open sets: $\varnothing$, $\{\top\}$, $\{\bot, \top\}$, we have what is called the Sierpinski space; and its infinite product $\{\bot, \top\}^\omega$ with the product topology is the same as $\mathbf{P}\omega$. The finite sets $e_n \in \mathbf{P}\omega$ correspond exactly to the usual basic open sets for the product. For those familiar with such notions, this well-known observation makes many of the facts mentioned in this section fairly obvious. From any point of view, Theorem 1.1 and the remarks in the following paragraph are simple exercises.

2.2.2 Finite subsets and the enumeration e_n ✓

e.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.Pomega
public import Mathlib.Algebra.Group.Nat.Defs
import Mathlib.Algebra.GroupWithZero.Nat
public import Mathlib.Basic.Finite.Defs
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def e (n : ℕ) : Pomega := {k | n.testBit k}

namespace e

private theorem pow2_eq (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := by
  ext i
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_two_pow]

@[simp] theorem mem {n k : ℕ} : k ∈ e n ↔ n.testBit k := Iff.rfl

theorem zero : e 0 = ∅ := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e]

theorem pow2 (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := pow2_eq k

theorem or (n m : ℕ) : e (n ||| m) = e n ∪ e m := by
```

```
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_or]

theorem or_of_subset {n m : ℕ} {x : Pomega} (hn : e n ⊆ x) (hm : e m ⊆ x) : e (n ||| m
    ) ⊆ x := by
  rw [or]
  exact Set.union_subset hn hm

theorem le_two_pow (k : ℕ) : k ≤ 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k + 1 := Nat.succ_le_succ ih
      _ ≤ 2 ^ k + 2 ^ k := Nat.add_le_add_left Nat.one_le_two_pow _
      _ = 2 ^ k * 2 := (Nat.mul_two (2 ^ k)).symm
      _ = 2 ^ (k + 1) := (Nat.pow_succ 2 k).symm

theorem two_pow_le_of_testBit {n k : ℕ} (h : n.testBit k) : 2 ^ k ≤ n := by
  have hmod : (n >>> k) % 2 = 1 := by simpa [Nat.testBit] using h
  have hpos : 0 < n >>> k := Nat.pos_of_ne_zero fun hz => by simp [hz] at hmod
  have hdiv : 1 ≤ n / 2 ^ k := by
    rwa [Nat.shiftRight_eq_div_pow] at hpos
  simpa using (Nat.le_div_iff_mul_le (Nat.two_pow_pos k)).mp hdiv

theorem lt_two_pow' (k : ℕ) : k < 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k := Nat.succ_le_of_lt ih
      _ < 2 ^ k + 2 ^ k := Nat.lt_add_of_pos_right (Nat.two_pow_pos k)
      _ = 2 ^ (k + 1) := by rw [← Nat.two_mul, Nat.mul_comm, Nat.pow_succ]

theorem mem_le {n k : ℕ} (h : k ∈ e n) : k ≤ n :=
  (le_two_pow k).trans (two_pow_le_of_testBit h)

theorem mem_lt {n k : ℕ} (h : k ∈ e n) : k < n := by
  have hle := mem_le h
  rcases eq_or_lt_of_le hle with rfl | hlt
  · exact (lt_irrefl k ((lt_two_pow' k).trans_le (two_pow_le_of_testBit h))).elim
  · exact hlt

theorem finite (n : ℕ) : (_root_.DomainTheory.DataTypesAsLattices.e n : Pomega).Finite
    :=
  (Finset.range (n + 1)).finite_toSet.subset fun _k hk =>
    Finset.mem_range.mpr (Nat.lt_succ_of_le (mem_le hk))

end e

end DomainTheory.DataTypesAsLattices
```

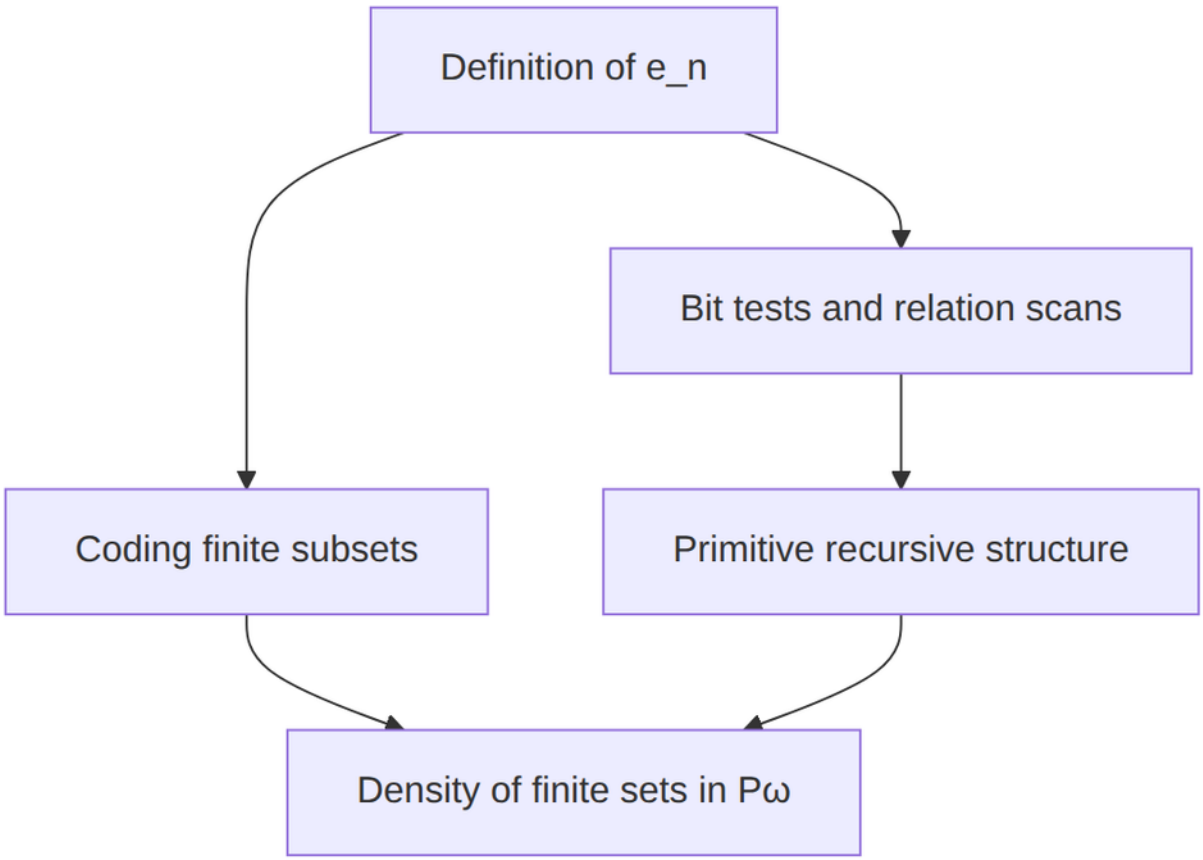

Figure 23: Finite subsets and the enumeration e_n ✓.

Definition of e_n ✓ To make the topology "visible", we introduce a standard enumeration $\{e_n \mid n \in \omega\}$ of all *finite* subsets of ω. Specifically we set

$$e_n = \{k_0, k_1, \cdots, k_{m-1}\},$$

provided that $k_0 < k_1 < \cdots < k_{m-1}$ and $n = \sum_{i<m} 2^{k_i}$. Thus n is the code number for e_n, and the elements of e_n are the exponents in the binary expansion of the integer n.

Definition. For $n \in \omega$, the finite set $e_n \in \mathbf{P}\omega$ is

$$e_n = \{k \in \omega \mid n.\mathrm{testBit}(k)\}.$$

Equivalently, $k \in e_n$ iff the binary expansion of n has a 1 in bit k.

Lemma (`e.mem`). For all $n, k \in \omega$, $k \in e_n \leftrightarrow n.\mathrm{testBit}(k)$.

Proof. This is the definition of membership in $\{k \mid n.\mathrm{testBit}(k)\}$. ■

Theorem (`e.zero`). $e_0 = \emptyset$.

Proof. A natural number has no 1-bits iff it is zero, so membership in e_0 is impossible. Extensionality gives $e_0 = \emptyset$. ■

Theorem (`e.pow2`). For each $k \in \omega$, $e_{2^k} = \{k\}$.

Proof. By `Nat.testBit_two_pow`, 2^k has a 1 in bit i exactly when $i = k$; that is the membership characterization of the singleton $\{k\}$. ■

Theorem (`e.or`). For all $n, m \in \omega$, $e_{n|m} = e_n \cup e_m$, where $|$ is bitwise OR on ω.

Proof. Bit k is set in $n \mid m$ iff it is set in n or in m, which is exactly membership in the union $e_n \cup e_m$. ■

Lemma (`e.or_of_subset`). If $e_n \subseteq x$ and $e_m \subseteq x$ for some $x \in \mathbf{P}\omega$, then $e_{n|m} \subseteq x$.

Proof. By `e.or`, $e_{n|m} = e_n \cup e_m$; two set inclusions into x imply the union is contained in x. ■

This is a one-to-one enumeration of finite subsets, where $k \in e_n$ always implies $k < n$,

Lemma (`e.le_two_pow`). For every $k \in \omega$, $k \leq 2^k$.

Proof. Induction on k. For $k = 0$, both sides are 1. For the step $k \to k + 1$, the induction hypothesis gives $k \leq 2^k$, hence $k + 1 \leq 2^k + 1 \leq 2^k + 2^k = 2^{k+1}$. ■

Lemma (`e.two_pow_le_of_testBit`). If $n.\mathrm{testBit}(k)$ is true, then $2^k \leq n$.

Proof. The hypothesis means $(n \gg k) \bmod 2 = 1$, so $n \gg k > 0$. Writing division by 2^k as a right shift, $1 \leq n/2^k$; equivalently $2^k \leq n$. ■

Lemma (`e.lt_two_pow'`). For every $k \in \omega$, $k < 2^k$.

Proof. Induction on k. For $k = 0$, $0 < 1$. For the step, $k + 1 \leq 2^k$ by the induction hypothesis, and $2^k < 2^k + 2^k = 2^{k+1}$ because $2^k > 0$. ■

Lemma (`e.mem_le`). If $k \in e_n$, then $k \leq n$.

Proof. Membership $k \in e_n$ is $n.\mathrm{testBit}(k)$. By `e.two_pow_le_of_testBit`, $2^k \leq n$; by `e.le_two_pow`, $k \leq 2^k$. Transitivity gives $k \leq n$. ■

Theorem (`e.mem_lt`). If $k \in e_n$, then $k < n$.

Proof. By `e.mem_le`, $k \leq n$. If $k = n$, then `e.two_pow_le_of_testBit` would give $2^k \leq n = k$, while `e.lt_two_pow'` gives $k < 2^k$, a contradiction. So $k \neq n$ and therefore $k < n$. ■

This is the formal content of Scott's clause that $k \in e_n$ always implies $k < n$.

Theorem (`e.finite`). Every set e_n is finite.

Proof. If $k \in e_n$, then `e.mem_le` gives $k \leq n$, so $e_n \subseteq \{0, \ldots, n\}$. That interval is finite, hence so is e_n. ■

Bit tests and relation scans ✓ The relations Scott treats as primitive recursive are evaluated by scanning binary expansions. This note supplies primitive-recursive bit access and the Boolean procedures that decide membership, inclusion, and union-coding for e_n.

Theorem (`primrec_twoPow`). The function $k \mapsto 2^k$ is primitive recursive.

Proof. Primitive recursion on k with constant 1 and step doubling the accumulator. ■

Theorem (`primrec_testBit`). The function $(n, k) \mapsto n.\mathrm{testBit}(k)$ is primitive recursive.

Proof. Write $\mathrm{testBit}(n, k)$ as parity of $\lfloor n/2^k \rfloor$, using `primrec_twoPow` and division/modulo. ■

Lemma (`not_testBit_of_ge`). If $n \leq k$, then $n.\mathrm{testBit}(k) = \mathrm{false}$.

Proof. A true bit would place $k \in e_n$, contradicting `e.mem_lt` with $k \not< n$. ■

Definition (`e.subsetBool`). `e.subsetBool n m` iteratively verifies every 1-bit of n is a 1-bit of m.

Lemma (`e.subsetBool_iff`). `e.subsetBool n m = true` iff $n.\mathrm{testBit}(k) \Rightarrow m.\mathrm{testBit}(k)$ for every k.

Proof. Induction on the scan fuel; bits above n are false by `not_testBit_of_ge`. ■

Theorem (`primrec_e_subsetBool`). `e.subsetBool` is primitive recursive in (n, m).

Proof. A primitive recursive loop on the bit index using `primrec_testBit`. ■

Definition (`e.eqUnionBool`). `e.eqUnionBool n m k` checks $n.\mathrm{testBit}(i) = m.\mathrm{testBit}(i) \vee k.\mathrm{testBit}(i)$ for $i \leq n + m + k$.

Theorem (`e.eqUnionBool_iff`). `e.eqUnionBool n m k = true` iff $e_n = e_m \cup e_k$.
Proof. Extensionality on membership, with trivial bits beyond the scan bound. ■
Theorem (`primrec_e_eqUnionBool`). `e.eqUnionBool` is primitive recursive in (n, m, k).
Proof. Same iterator pattern as `e.subsetBool`. ■

eScan.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Computability.Primrec.Basic

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

theorem primrec_twoPow : Primrec fun k : ℕ => 2 ^ k :=
  (Primrec.nat_rec' (f := id) (g := fun _ => (1 : ℕ))
    (h := fun (_ : ℕ) (p : ℕ × ℕ) => p.2 * 2)
    Primrec.id (Primrec.const 1)
    (show Primrec fun q : ℕ × ℕ × ℕ => q.2.2 * 2 from
      Primrec.nat_mul.comp (Primrec.snd.comp Primrec.snd) (Primrec.const 2))).of_eq
    fun k => by
      induction k with
      | zero => simp
      | succ k ih =>
        change (Nat.rec 1 (fun n IH => (n, IH).2 * 2) k) * 2 = 2 ^ (k + 1)
        have ih' : Nat.rec 1 (fun n IH => (n, IH).2 * 2) k = 2 ^ k := by
          simpa [id] using ih
        rw [ih', Nat.pow_succ, Nat.mul_comm]

theorem primrec_testBit : Primrec₂ fun n k : ℕ => n.testBit k :=
  (Primrec.eq.decide.comp
    (Primrec.nat_mod.comp
      (Primrec.nat_div.comp Primrec.fst (primrec_twoPow.comp Primrec.snd))
      (Primrec.const 2))
    (Primrec.const 1)).of_eq fun _p =>
      Nat.testBit_eq_decide_div_mod_eq.symm

theorem not_testBit_of_ge {n k : ℕ} (h : n ≤ k) : n.testBit k = false := by
  cases ht : n.testBit k with
  | false => rfl
  | true => exact (Nat.not_le_of_gt (e.mem_lt (e.mem.mpr ht)) h).elim

theorem primrecRel_testBit_true : PrimrecRel fun (n k : ℕ) => n.testBit k = true :=
  Primrec.eq.comp primrec_testBit (Primrec.const true)

namespace e

private abbrev Enc := _root_.DomainTheory.DataTypesAsLattices.e

private theorem mem_iff {n k : ℕ} : k ∈ Enc n ↔ n.testBit k := by
  rw [Enc, mem]
```

```
private def subsetBoolAux (n m fuel : ℕ) : Bool :=
  fuel.rec true fun k ih => ih && (!(n.testBit k) || m.testBit k)

def subsetBool (n m : ℕ) : Bool := subsetBoolAux n m n

private theorem subsetBoolAux_succ (n m fuel : ℕ) :
    subsetBoolAux n m (fuel + 1) =
      (subsetBoolAux n m fuel && (!(n.testBit fuel) || m.testBit fuel)) :=
  rfl

private theorem subsetBoolAux_iff (n m fuel : ℕ) :
    subsetBoolAux n m fuel = true ↔
      ∀ k < fuel, n.testBit k = true → m.testBit k = true := by
  induction fuel with
  | zero => simp [subsetBoolAux]
  | succ fuel ih =>
    rw [subsetBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ k hk
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hk) with hlt | rfl
      · exact h k hlt
      · intro hk'
        simp [hk'] at hb
        exact hb
    · intro h
      refine ⟨fun k hk => h k (Nat.lt_succ_of_lt hk), ?_⟩
      by_cases hk : n.testBit fuel = true
      · simp [h fuel (Nat.lt_succ_self fuel) hk]
      · simp [hk]

theorem subsetBool_iff (n m : ℕ) :
    subsetBool n m = true ↔ ∀ k, n.testBit k = true → m.testBit k = true := by
  rw [subsetBool, subsetBoolAux_iff]
  constructor
  · intro h k hk
    by_cases hkn : k < n
    · exact h k hkn hk
    · exact absurd hk (by simp [not_testBit_of_ge (Nat.le_of_not_gt hkn)])
  · intro h k _ hk
    exact h k hk

private def eqUnionBoolAux (n m k fuel : ℕ) : Bool :=
  fuel.rec true fun i ih => ih && (n.testBit i == (m.testBit i || k.testBit i))

def eqUnionBool (n m k : ℕ) : Bool := eqUnionBoolAux n m k (n + m + k + 1)

private theorem eqUnionBoolAux_succ (n m k fuel : ℕ) :
    eqUnionBoolAux n m k (fuel + 1) =
      (eqUnionBoolAux n m k fuel && (n.testBit fuel == (m.testBit fuel || k.testBit
    fuel))) :=
  rfl

private theorem eqUnionBoolAux_iff (n m k fuel : ℕ) :
    eqUnionBoolAux n m k fuel = true ↔
      ∀ i < fuel, n.testBit i = (m.testBit i || k.testBit i) := by
```

```
  induction fuel with
  | zero => simp [eqUnionBoolAux]
  | succ fuel ih =>
    rw [eqUnionBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ i hi
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hi) with hlt | rfl
      · exact h i hlt
      · simpa [beq_iff_eq] using hb
    · intro h
      refine ⟨fun i hi => h i (Nat.lt_succ_of_lt hi), ?_⟩
      simpa [beq_iff_eq] using h fuel (Nat.lt_succ_self fuel)

theorem eqUnionBool_iff (n m k : ℕ) :
    eqUnionBool n m k = true ↔ Enc n = Enc m ∪ Enc k := by
  rw [eqUnionBool, eqUnionBoolAux_iff]
  constructor
  · intro h
    ext i
    rw [mem_iff, Set.mem_union, mem_iff (n := m), mem_iff (n := k)]
    by_cases hi : i < n + m + k + 1
    · rw [h i hi]
      simp
    · have hle : n + m + k + 1 ≤ i := Nat.le_of_not_gt (by simpa [gt_iff_lt] using hi)
      have hn_le : n ≤ n + m + k + 1 := by simp [Nat.add_assoc]
      have hm_le : m ≤ n + m + k + 1 :=
        Nat.le_trans (Nat.le_add_left m n) (Nat.le_add_right (n + m) (k + 1))
      have hk_le : k ≤ n + m + k + 1 := by
        calc
          k ≤ n + m + 1 + k := Nat.le_add_left k (n + m + 1)
          _ = n + m + k + 1 := by
            rw [Nat.add_assoc (n + m) 1 k, Nat.add_comm 1 k, ← Nat.add_assoc (n + m) k
     1]
      have hn := not_testBit_of_ge (Nat.le_trans hn_le hle)
      have hm := not_testBit_of_ge (Nat.le_trans hm_le hle)
      have hk := not_testBit_of_ge (Nat.le_trans hk_le hle)
      simp [hn, hm, hk]
  · intro h i _
    have hmem : n.testBit i = true ↔ m.testBit i = true ∨ k.testBit i = true := by
      rw [← mem_iff, h, Set.mem_union, ← mem_iff (n := m), ← mem_iff (n := k)]
    cases hn : n.testBit i <;> cases hm : m.testBit i <;> cases hk : k.testBit i <;>
      simp [hn, hm, hk] at hmem ⊢

end e

theorem eSubsetBool_iff (n m : ℕ) :
    e.subsetBool n m = true ↔ e n ⊆ e m := by
  simp [Set.subset_def, e.mem, e.subsetBool_iff]

theorem eEqUnionBool_iff (n m k : ℕ) :
    e.eqUnionBool n m k = true ↔ e n = e m ∪ e k :=
  e.eqUnionBool_iff n m k

theorem primrec_e_subsetBool : Primrec₂ e.subsetBool := by
  have hstep : Primrec₂ fun (p : ℕ × ℕ) (nih : ℕ × Bool) =>
```

```
      nih.2 && (!(p.1.testBit nih.1) || p.2.testBit nih.1) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.or.comp
        (Primrec.not.comp
          (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp
    Primrec.snd)))
        (primrec_testBit.comp (Primrec.snd.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd)))
  exact (Primrec.nat_rec' Primrec.fst (Primrec.const true) hstep).of_eq fun _ => rfl

theorem primrec_e_eqUnionBool : Primrec fun t : ℕ × ℕ × ℕ =>
    e.eqUnionBool t.1 t.2.1 t.2.2 := by
  have hbound : Primrec fun t : ℕ × ℕ × ℕ => t.1 + t.2.1 + t.2.2 + 1 :=
    Primrec.succ.comp
      (Primrec.nat_add.comp
        (Primrec.nat_add.comp Primrec.fst (Primrec.fst.comp Primrec.snd))
        (Primrec.snd.comp Primrec.snd))
  have hstep : Primrec₂ fun (p : ℕ × ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (p.1.testBit nih.1 == (p.2.1.testBit nih.1 || p.2.2.testBit nih.1)) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.beq.comp
        (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd))
        (Primrec.or.comp
          (primrec_testBit.comp
            (Primrec.fst.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))
          (primrec_testBit.comp
            (Primrec.snd.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))))
  exact (Primrec.nat_rec' hbound (Primrec.const true) hstep).of_eq fun _ => rfl

end DomainTheory.DataTypesAsLattices
```

Primitive recursive structure ✓ The function $\max(e_n)$ is (primitive) recursive in n, and the relations $k \in e_n$, $e_n \subseteq e_m$, $e_n = e_m \cup e_k$ are all (primitive) recursive in k, m, n.

Theorem (`primrecRel_mem_e`). The relation $(n, k) \mapsto k \in e_n$ is primitive recursive.

Proof. By `e.mem`, membership is $n.\mathrm{testBit}(k)$; apply `primrec_testBit`. ■

Definition (`eMax`). `eMax n` is the greatest $k \le n$ with $n.\mathrm{testBit}(k) = \mathrm{true}$, or 0 if none.

Theorem (`primrec_eMax`). The function `eMax` is primitive recursive.

Proof. `Nat.findGreatest` on the primitive-recursive predicate $n.\mathrm{testBit}(k) = \mathrm{true}$. ■

Theorem (`primrecRel_e_subset`). The relation $(n, m) \mapsto e_n \subseteq e_m$ is primitive recursive.

Proof. By `e.subsetBool_iff`, inclusion equals `e.subsetBool n m = true`; apply `primrec_e_subsetBool`. ■

Theorem (`primrecPred_e_eq_union`). The predicate $(n, m, k) \mapsto e_n = e_m \cup e_k$ is primitive recursive.

Proof. By `e.eqUnionBool_iff`, apply `primrec_e_eqUnionBool`. ■

Theorem (`scott_e_primrec_structure`). Scott's bundled claim: membership in e_n is a primitive recursive relation in (n, k); `eMax` is primitive recursive; inclusion $e_n \subseteq e_m$ is a primitive recursive relation in (n, m); and equality $e_n = e_m \cup e_k$ is a primitive recursive predicate in (n, m, k).

Proof. Conjunction of the four preceding theorems. ■

ePrimrec.lean

```
module

public import Mathlib.Computability.Primrec.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.e
import DomainTheory.DataTypesAsLattices.Pomega.eScan

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem primrecRel_mem_e : PrimrecRel fun n k => k ∈ e n :=
  primrecRel_testBit_true.of_eq fun n k => by simp [e.mem]

def eMax (n : ℕ) : ℕ := Nat.findGreatest (fun k => n.testBit k = true) n

theorem primrec_eMax : Primrec eMax := by
  exact (Primrec.nat_findGreatest Primrec.id primrecRel_testBit_true).of_eq fun _ =>
    rfl

theorem primrecRel_e_subset : PrimrecRel fun n m => e n ⊆ e m :=
  (Primrec.eq.comp primrec_e_subsetBool (Primrec.const true)).of_eq fun p =>
    eSubsetBool_iff p.1 p.2

theorem primrecPred_e_eq_union :
    PrimrecPred fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2 :=
  (Primrec.eq.comp primrec_e_eqUnionBool (Primrec.const true)).of_eq fun t =>
    eEqUnionBool_iff t.1 t.2.1 t.2.2

/-- Scott (1976), §1: membership, inclusion, union-equality for `e`, and `eMax`. -/
theorem scott_e_primrec_structure :
    PrimrecRel (fun n k => k ∈ e n) ∧
      Primrec eMax ∧
        PrimrecRel (fun n m => e n ⊆ e m) ∧
          PrimrecPred (fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2) :=
  ⟨primrecRel_mem_e, primrec_eMax, primrecRel_e_subset, primrecPred_e_eq_union⟩

end DomainTheory.DataTypesAsLattices
```

Coding finite subsets ✓ Scott's definition identifies e_n with the set of bit positions where n has a 1. Every finite subset of ω arises that way; this note gives an explicit constructor and the existence lemmas used later (density, Scott continuity, enumeration).

Definition (`e.codeList`). For a list $k_0 :: \cdots :: k_{m-1} :: []$, `e.codeList` returns $2^{k_0} \mid \cdots \mid 2^{k_{m-1}}$ (and 0 for the empty list).

Theorem (`e.codeList_eq`). For every list `ks` of naturals,

$$e(\texttt{e.codeList}\ ks) = \{k \mid k \in ks\}.$$

Proof. Induction on `ks`. The empty list codes $e_0 = \emptyset$. For `k :: ks`, `e.codeList` ORs in 2^k; by `e.or` and `e.pow2`, membership matches the list membership characterization. ■

Definition (`e.codeFinset`). For a finset `s`, `e.codeFinset s` is `e.codeList` applied to the list of elements of `s` (order as stored in the finset).

Theorem (`e.codeFinset_eq`). For every finset `s` of naturals,

$$e(\texttt{e.codeFinset}\ s) = s$$

as subsets of ω.

Proof. Extensionality using `e.codeList_eq` on the element list. ■

Theorem (`e.exists_code`). Every finset `s` has a code $n \in \omega$ with $e_n = s$ as sets.

Proof. Witness `e.codeFinset s` and `e.codeFinset_eq`. ■

Theorem (`e.exists_code_of_finite`). If $s \in \mathbf{P}\omega$ is finite, then $\exists n,\ e_n = s$.

Proof. Write s as a finset and apply `e.exists_code`. ■

When the exponents k_i are strictly increasing, this agrees with Scott's sum $\sum_{i<m} 2^{k_i}$; duplicate entries in a list would OR the same bit twice, so the finset formulation is the canonical coding for an arbitrary finite set.

`codeFinset.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Data.Finset.Defs
public import Mathlib.Data.Multiset.Basic
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Bit-mask code of a list of naturals: bitwise OR of $2^k$ over entries. -/
def codeList : List ℕ → ℕ
  | [] => 0
  | k :: ks => 2 ^ k ||| codeList ks

theorem codeList_eq (ks : List ℕ) : e (codeList ks) = {k | k ∈ ks} := by
  induction ks with
  | nil => simp [codeList, zero]
  | cons k ks ih =>
    ext i
    simp [codeList, or, pow2, ih]

noncomputable def codeFinset (s : Finset ℕ) : ℕ := codeList s.val.toList

theorem codeFinset_eq (s : Finset ℕ) : e (codeFinset s) = (s : Set ℕ) := by
  ext k
  simp [codeFinset, codeList_eq]

theorem exists_code (s : Finset ℕ) : ∃ n, e n = (s : Set ℕ) :=
  ⟨codeFinset s, codeFinset_eq s⟩

theorem exists_code_of_finite {s : Pomega} (hs : Set.Finite s) :
    ∃ n, e n = s := by
  obtain ⟨t, ht⟩ := hs.exists_finset_coe
  exact ⟨codeFinset t, ht ▸ codeFinset_eq t⟩
```

```
end e

end DomainTheory.DataTypesAsLattices
```

Density of finite sets in $\mathbf{P}\omega$ ✓ Topologically speaking the finite sets e_n are *dense* in the space $\mathbf{P}\omega$, for each $x \in \mathbf{P}\omega$ is the "limit" of its finite subsets in the sense that

$$x = \bigcup \{e_n \mid e_n \subseteq x\}.$$

The formalization packages each included finite piece $e_n \subseteq x$ as a subset of $\mathbf{P}\omega$ and unions over all codes n.

Definition (`e.below`). `e.below x n` is $\{k \mid e_n \subseteq x \wedge k \in e_n\}$ (equivalently e_n when $e_n \subseteq x$, and $\emptyset$ otherwise).

Lemma (`e.singleton_eq`). For each $k \in \omega$, the singleton $\{k\}$ equals e_{2^k}.

Proof. This is `e.pow2`, read backwards. ■

Lemma (`e.exists_mem`). If $k \in x$ for $x \in \mathbf{P}\omega$, then there exists n with $e_n \subseteq x$ and $k \in e_n$.

Proof. Witness $n = 2^k$; use `e.singleton_eq` and singleton inclusion. ■

Theorem (`e.union_below_eq`). For every $x \in \mathbf{P}\omega$,

$$\bigcup_n \texttt{e.below}\ x\ n = x.$$

Proof. ($\subseteq$) Each k in the union lies in some $e_n \subseteq x$. ($\supseteq$) For $k \in x$, `e.exists_mem` gives n with $k \in$ `e.below` $x\ n$. ■

This is Scott's density clause before the definition of open sets in $\mathbf{P}\omega$.

`eDense.lean`

```
module

public import Mathlib.Order.SetNotation
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Attr.Core
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Elements of $e_n$ when $e_n \subseteq x$ (empty if $e_n \not\subseteq x$). -/
def below (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ e n}

theorem singleton_eq (k : ℕ) : ({k} : Pomega) = e (2 ^ k) := (pow2 k).symm

theorem exists_mem {x : Pomega} {k : ℕ} (hk : k ∈ x) :
    ∃ n, e n ⊆ x ∧ k ∈ e n :=
```

```
  ⟨2 ^ k, by simp [pow2, Set.singleton_subset_iff, hk], by simp [pow2]⟩

theorem union_below_eq (x : Pomega) : (⋃ n, below x n) = x := by
  ext k
  constructor
  · intro hk
    obtain ⟨n, hn, hke⟩ := Set.mem_iUnion.mp hk
    exact hn hke
  · intro hk
    refine Set.mem_iUnion.mpr ⟨2 ^ k, ?_⟩
    simp [below, pow2, Set.singleton_subset_iff, hk]

end e

end DomainTheory.DataTypesAsLattices
```

2.2.3 Cantor pairing of integer pairs (n, m) ✓

To formulate later definitions we introduce a standard enumeration of all pairs of naturals. The code follows the "little diagonal" ordering Scott describes; the inverse `unpair` is included in Lean for convenience even though the paper does not fix notation for it yet.

Definition (`pair`). The Cantor pairing is

$$\texttt{pair}\ n\ m = \tfrac{1}{2}(n+m)(n+m+1) + m.$$

Definition (`triangle`). Write $T(w) = w(w+1)/2$ for the w-th triangular number: `triangle w`.

Lemma (`pair_eq_triangle`). $\texttt{pair}\ n\ m = T(n+m) + m$.

Proof. Definition of `pair` and `triangle`. ■

Lemma (`triangle_succ`). $T(w+1) = T(w) + (w+1)$.

Proof. Expand $(w+1)(w+2)$ as $w(w+1) + 2(w+1)$ and divide by 2. ■

Lemma (`exists_triangle_bucket`). For every $k \in \omega$ there exists w with $T(w) \le k < T(w{+}1)$.

Proof. The predicate $k < T(w+1)$ holds for $w = k$ because $T(k+1) = T(k) + (k+1)$. Take the least such w by `Nat.find`; minimality gives $T(w) \le k$. ■

Theorem (`exists_pair`). For every $k \in \omega$ there exist n, m with $\texttt{pair}\ n\ m = k$.

Proof. Choose w from `exists_triangle_bucket`. Set $m = k - T(w)$ and $n = w - m$. Then $m \le w$ and $n + m = w$, so `pair_eq_triangle` and $k = T(w) + m$ yield $\texttt{pair}\ n\ m = k$. ■

Definition (`unpair`). `unpair k` is some pair (n, m) with $\texttt{pair}\ n\ m = k$, chosen from `exists_pair`.

Lemma (`pair_le_left`). $n \le \texttt{pair}\ n\ m$.

Proof. Since $n \le n + m$, we have $2n \le (n+m)(n+m+1)$ for $n > 0$, hence $n \le T(n+m)$; the case $n = 0$ is trivial. Then $n \le T(n+m) + m = \texttt{pair}\ n\ m$. ■

Lemma (`pair_lt_left`). $n < \texttt{pair}\ n\ m + 1$.

Proof. From `pair_le_left` and `Nat.lt_succ_self`. ■

Lemma (`pair_le_right`). $m \le \texttt{pair}\ n\ m$.

Proof. $\texttt{pair}\ n\ m = T(n+m) + m \ge m$. ■

Lemma (`pair_lt_right`). $m < \texttt{pair}\ n\ m + 1$.

Proof. From `pair_le_right`. ■

These are Scott's bounds $n \le (n, m)$ and $m \le (n, m)$; strict inequality to $\texttt{pair}\ n\ m + 1$ is the formal counterpart of his remark about equality only at $(0, 0)$ and $(1, 0)$.

Lemma (`pair_unpair`). $\texttt{pair}\ (\texttt{unpair}\ k).1\ (\texttt{unpair}\ k).2 = k$.

Proof. By construction from `exists_pair`. ■

Lemma (`triangle_le_of_le`). If $a \le b$ then $T(a) \le T(b)$.

Proof. Induction on $a \le b$; the step uses `triangle_succ` and monotonicity of addition. ■

Lemma (`triangle_le_pair`). For all n, m,

$$T(n + m) \le \texttt{pair}\ n\ m < T(n + m + 1).$$

Proof. The lower bound is $T(n + m) + m \ge T(n + m)$. For the upper bound, `pair_eq_triangle` and `triangle_succ` give $\texttt{pair}\ n\ m = T(n+m) + m < T(n+m) + (n+m+1) = T(n+m+1)$. ■

Lemma (`triangle_lt_of_lt`). If $a < b$ then $T(a) < T(b)$.

Proof. From $a + 1 \le b$, strict inequality $T(a) < T(a+1) = T(a) + (a+1)$ and `triangle_le_of_le`. ■

Theorem (`pair_inj`). If $\texttt{pair}\ n_1\ m_1 = \texttt{pair}\ n_2\ m_2$, then $n_1 = n_2$ and $m_1 = m_2$.

Proof. Compare $w_i = n_i + m_i$ using the window $T(w_i) \le \texttt{pair}\ n_i\ m_i < T(w_i+1)$ from `triangle_le_pair`. If $w_1 \ne w_2$, one paired value would lie strictly below the other, contradicting equality. So $w_1 = w_2$; then $T(w) + m_1 = T(w) + m_2$ gives $m_1 = m_2$, and $n_1 + m_1 = n_2 + m_2$ gives $n_1 = n_2$. ■

Theorem (`unpair_pair`). $\texttt{unpair}\ (\texttt{pair}\ n\ m) = (n, m)$.

Proof. `pair_unpair` and injectivity `pair_inj`. ■

Together, `pair` and `unpair` form a bijection $\omega \times \omega \cong \omega$, so this is the one-to-one enumeration Scott asserts (with primitive recursive inverse left informal in the text).

`pair.lean`

```
module

public import Aesop.BuiltinRules
public import Mathlib.Data.Nat.Notation
public import Mathlib.Tactic.ToAdditive
public import Mathlib.Tactic.ToDual
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Nat.Find
import Mathlib.Order.Basic
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Finiteness.Attr
import Mathlib.Tactic.SetLike
import Mathlib.Tactic.Widget.Calc

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def pair (n m : ℕ) : ℕ := (n + m) * (n + m + 1) / 2 + m

def triangle (w : ℕ) : ℕ := w * (w + 1) / 2

theorem pair_eq_triangle (n m : ℕ) : pair n m = triangle (n + m) + m := rfl

theorem triangle_succ (w : ℕ) : triangle (w + 1) = triangle w + (w + 1) := by
```

```
  have hex : (w + 1) * (w + 2) = w * (w + 1) + 2 * (w + 1) := by
    calc
      (w + 1) * (w + 2) = (w + 1) * w + (w + 1) * 2 := Nat.mul_add _ _ _
      _ = w * (w + 1) + 2 * (w + 1) := by
        rw [Nat.mul_comm (w + 1) w, Nat.mul_comm (w + 1) 2]
  simp only [triangle]
  rw [show (w + 1) * ((w + 1) + 1) = (w + 1) * (w + 2) from rfl, hex]
  exact Nat.add_mul_div_left _ _ (by decide : 0 < 2)

theorem exists_triangle_bucket (k : ℕ) :
    ∃ w, triangle w ≤ k ∧ k < triangle (w + 1) := by
  let P := fun w : ℕ => k < triangle (w + 1)
  have hP : ∃ w, P w := ⟨k, by
    change k < triangle (k + 1)
    rw [triangle_succ]
    exact lt_of_lt_of_le (Nat.lt_succ_self k) (Nat.le_add_left (k + 1) _)⟩
  let w := Nat.find hP
  refine ⟨w, ?_, Nat.find_spec hP⟩
  cases hw : w with
  | zero => exact Nat.zero_le k
  | succ w' =>
    have hmin : ¬ P w' :=
      Nat.find_min hP (Nat.lt_of_succ_le (by
        have : w = Nat.find hP := rfl
        rw [← this, hw]))
    exact Nat.le_of_not_gt hmin

theorem exists_pair (k : ℕ) : ∃ n m, pair n m = k := by
  obtain ⟨w, hle, hlt⟩ := exists_triangle_bucket k
  refine ⟨w - (k - triangle w), k - triangle w, ?_⟩
  have hlt' : k < triangle w + w + 1 := by
    have : k < triangle w + (w + 1) := by rwa [triangle_succ] at hlt
    exact Nat.add_assoc (triangle w) w 1 ▸ this
  have hk : k ≤ triangle w + w := Nat.lt_succ_iff.mp hlt'
  have hm : k - triangle w ≤ w :=
    Nat.le_of_add_le_add_left ((Nat.add_sub_of_le hle).symm ▸ hk)
  have : w - (k - triangle w) + (k - triangle w) = w := Nat.sub_add_cancel hm
  rw [pair_eq_triangle, this, Nat.add_sub_of_le hle]

noncomputable def unpair (k : ℕ) : ℕ × ℕ :=
  ((exists_pair k).choose, (exists_pair k).choose_spec.choose)

theorem pair_le_left (n m : ℕ) : n ≤ pair n m := by
  have htri : n ≤ triangle (n + m) := by
    cases n with
    | zero => exact Nat.zero_le _
    | succ n =>
      have hmul : n.succ * 2 ≤ (n.succ + m) * (n.succ + m + 1) :=
        Nat.mul_le_mul
          (Nat.le_add_right n.succ m)
          (Nat.succ_le_succ
            (Nat.le_trans (Nat.succ_le_succ (Nat.zero_le n)) (Nat.le_add_right n.succ
    m)))
      exact (Nat.le_div_iff_mul_le (by decide : 0 < 2)).mpr hmul
  exact htri.trans (Nat.le_add_right _ _)
```

```
theorem pair_lt_left (n m : ℕ) : n < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_left n m)

theorem pair_le_right (n m : ℕ) : m ≤ pair n m :=
  Nat.le_add_left _ _

theorem pair_lt_right (n m : ℕ) : m < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_right n m)

theorem pair_unpair (k : ℕ) : pair (unpair k).1 (unpair k).2 = k :=
  (exists_pair k).choose_spec.choose_spec

theorem triangle_le_of_le {a b : ℕ} (h : a ≤ b) : triangle a ≤ triangle b := by
  induction h with
  | refl => exact le_rfl
  | step h ih =>
    rw [triangle_succ]
    exact le_trans ih (Nat.le_add_right _ _)

theorem triangle_le_pair (n m : ℕ) :
    triangle (n + m) ≤ pair n m ∧ pair n m < triangle (n + m + 1) := by
  constructor
  · exact Nat.le_add_right _ _
  · rw [triangle_succ]
    exact Nat.add_lt_add_left (Nat.lt_succ_of_le (Nat.le_add_left m n)) _

theorem triangle_lt_of_lt {a b : ℕ} (h : a < b) : triangle a < triangle b := by
  have : a + 1 ≤ b := Nat.succ_le_of_lt h
  calc
    triangle a < triangle a + (a + 1) := Nat.lt_add_of_pos_right (Nat.succ_pos _)
    _ = triangle (a + 1) := (triangle_succ a).symm
    _ ≤ triangle b := triangle_le_of_le this

theorem pair_inj {n₁ m₁ n₂ m₂ : ℕ} (h : pair n₁ m₁ = pair n₂ m₂) :
    n₁ = n₂ ∧ m₁ = m₂ := by
  have h1 := triangle_le_pair n₁ m₁
  have h2 := triangle_le_pair n₂ m₂
  have hw : n₁ + m₁ = n₂ + m₂ := by
    rcases lt_trichotomy (n₁ + m₁) (n₂ + m₂) with hlt | heq | hgt
    · have hle : triangle (n₁ + m₁ + 1) ≤ triangle (n₂ + m₂) :=
        triangle_le_of_le (Nat.succ_le_of_lt hlt)
      have : pair n₁ m₁ < pair n₁ m₁ :=
        calc
          pair n₁ m₁ < triangle (n₁ + m₁ + 1) := h1.2
          _ ≤ triangle (n₂ + m₂) := hle
          _ ≤ pair n₂ m₂ := h2.1
          _ = pair n₁ m₁ := h.symm
      exact (lt_irrefl _ this).elim
    · exact heq
    · have hle : triangle (n₂ + m₂ + 1) ≤ triangle (n₁ + m₁) :=
        triangle_le_of_le (Nat.succ_le_of_lt hgt)
      have : pair n₂ m₂ < pair n₂ m₂ :=
        calc
          pair n₂ m₂ < triangle (n₂ + m₂ + 1) := h2.2
          _ ≤ triangle (n₁ + m₁) := hle
          _ ≤ pair n₁ m₁ := h1.1
```

```
          _ = pair n₂ m₂ := h
      exact (lt_irrefl _ this).elim
  have hm : m₁ = m₂ := by
    have : triangle (n₁ + m₁) + m₁ = triangle (n₂ + m₂) + m₂ := h
    rw [hw] at this
    exact Nat.add_left_cancel this
  have hn : n₁ = n₂ := Nat.add_right_cancel (hw.trans (by rw [hm]))
  exact ⟨hn, hm⟩

theorem unpair_pair (n m : ℕ) : unpair (pair n m) = (n, m) := by
  have h := pair_unpair (pair n m)
  exact Prod.ext (pair_inj h).1 (pair_inj h).2

end DomainTheory.DataTypesAsLattices
```

2.2.4 Basic open sets and continuity on $\mathbf{P}\omega$ ✓

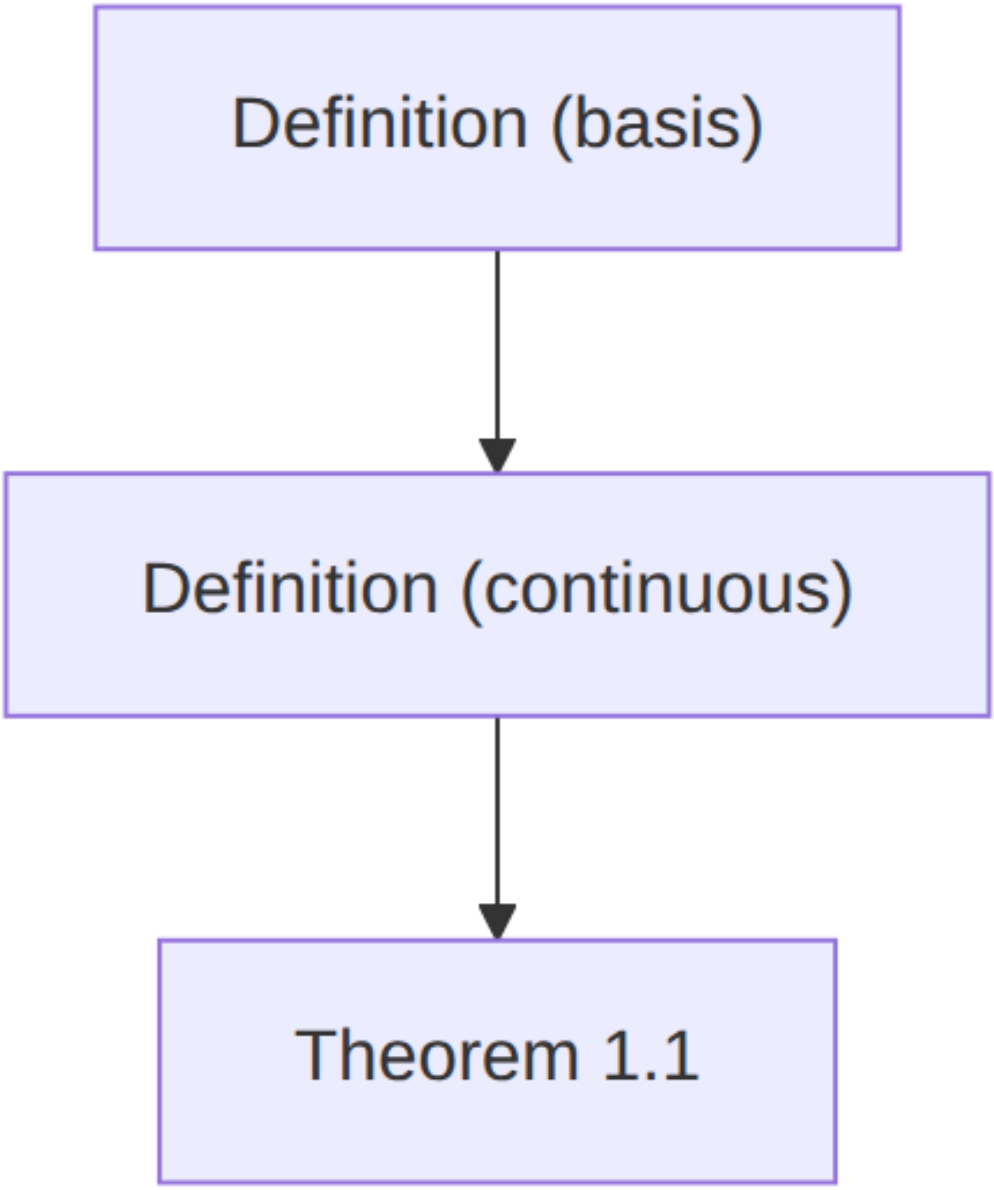

Figure 24: Basic open sets and continuity on $\mathbf{P}\omega$ ✓.

Definition (basis) ✓ **DEFINITION.** A *basis* for the neighborhoods of $\mathbf{P}\omega$ consists of those sets of the form:

$$\{x \in \mathbf{P}\omega \mid e_n \subseteq x\},$$

for a given e_n. An arbitrary *open subset* is then a union of basic neighborhoods.

It is easy to prove that an open subset $U \subseteq \mathbf{P}\omega$ is just a set of "finite character"; that is, a set such that for all $x \in \mathbf{P}\omega$ we have $x \in U$ if and only if some finite subset of x also belongs to U. An alternate approach would define directly what we mean by a continuous function using the idea that such functions must preserve limits.

Definition (`basicNhhd`). For $n \in \omega$, the basic neighborhood is $\mathrm{basicNhhd}\, n = \{x \in \mathbf{P}\omega \mid e_n \subseteq x\}$.

In the `basicNhhd` namespace we define:

Theorem (`inter`). $\mathrm{basicNhhd}\, n \cap \mathrm{basicNhhd}\, m = \mathrm{basicNhhd}\, (n \mid m)$.

Proof. Extensionality: x lies in the intersection iff $e_n \subseteq x$ and $e_m \subseteq x$ iff $e_n \cup e_m \subseteq x$ iff $e_{n|m} \subseteq x$ by `e.or`. ■

Theorem (`zero`). $\mathrm{basicNhhd}\, 0 = \mathbf{P}\omega$.

Proof. Every x satisfies $e_0 \subseteq x$ because $e_0 = \emptyset$ (`e.zero`). ■

Theorem (`mono`). If $e_n \subseteq e_m$, then $\mathrm{basicNhhd}\, m \subseteq \mathrm{basicNhhd}\, n$.

Proof. If $e_m \subseteq x$ and $e_n \subseteq e_m$, then $e_n \subseteq x$. ■

`basicNhhd.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.BooleanAlgebra
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def basicNhhd (n : ℕ) : Set Pomega := {x | e n ⊆ x}

namespace basicNhhd

theorem inter (n m : ℕ) :
    basicNhhd n ∩ basicNhhd m = basicNhhd (n ||| m) := by
  ext x
  simp [basicNhhd, e.or, Set.union_subset_iff]

theorem zero : basicNhhd 0 = Set.univ := by
  ext x
  simp [basicNhhd, e.zero]

theorem mono {n m : ℕ} (h : e n ⊆ e m) : basicNhhd m ⊆ basicNhhd n := by
  intro x hx
  exact h.trans hx

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

Definition (continuous) ✓ **DEFINITION.** A function $f : \mathbf{P}\omega \to \mathbf{P}\omega$ is *continuous* iff for all $x \in \mathbf{P}\omega$ we have:

$$f(x) = \bigcup \{ f(e_n) \mid e_n \subseteq x \}.$$

Again it is an easy exercise to prove that a function is continuous in the sense of this definition iff it is continuous in the usual topological sense (namely: inverse images of open sets are open). For giving proofs it is even more convenient to have the usual ε-δ formulation of continuity.

Definition (`scottPiece, scottUnion`). For $f : \mathbf{P}\omega \to \mathbf{P}\omega$, $x \in \mathbf{P}\omega$, and $n \in \omega$, let $\mathrm{scottPiece}\, f\, x\, n = \{k \mid e_n \subseteq x \wedge k \in f(e_n)\}$ and $\mathrm{scottUnion}\, f\, x = \bigcup_n \mathrm{scottPiece}\, f\, x\, n$. This is exactly Scott's union $\bigcup\{f(e_n) \mid e_n \subseteq x\}$.

Definition (`IsScottContinuous`). The typeclass `IsScottContinuous` on $f : \mathbf{P}\omega \to \mathbf{P}\omega$ packages the field `out`: for every x, $f(x) = \mathrm{scottUnion}\, f\, x$.

In the `IsScottContinuous` namespace:

Theorem (`monotone`). If f is Scott-continuous and $x \subseteq y$ in $\mathbf{P}\omega$, then $f(x) \subseteq f(y)$.

Proof. Take $m \in f(x)$. By `out` and `mem_scottUnion`, choose n with $e_n \subseteq x$ and $m \in f(e_n)$. Then $e_n \subseteq y$, so the same witness shows $m \in f(y)$ via `mem_scottUnion`. ■

Theorem (`determined`). If f and g are Scott-continuous and $f(e_n) = g(e_n)$ for every $n \in \omega$, then $f = g$.

Proof. For each x, `out` rewrites $f(x)$ and $g(x)$ as $\mathrm{scottUnion}\, f\, x$ and $\mathrm{scottUnion}\, g\, x$; extensionality on pieces uses `scottPiece` and the hypothesis on finite values $f(e_n)$, $g(e_n)$. ■

Theorem (`iff_continuous`). For $f : \mathbf{P}\omega \to \mathbf{P}\omega$, f is Scott-continuous iff f is continuous for the Scott topology on $\mathbf{P}\omega$ (generated by the basic opens $\mathrm{memOpen}\, k = \{x \mid k \in x\}$).

Proof. ($\Rightarrow$) By `continuous_generateFrom_iff`, it suffices to show each preimage $f^{-1}(\mathrm{memOpen}\, k)$ is Scott-open. Using `isScottOpen_iff_isOpen`, rewrite membership in that preimage as $k \in \mathrm{scottUnion}\, f\, x$ when $f(x) = \mathrm{scottUnion}\, f\, x$ (`out`), then as an union over indices n with $k \in f(e_n)$ and $e_n \subseteq x$ via `mem_scottUnion`; the converse direction uses `monotone` on the chosen finite witness.

($\Leftarrow$) Fix x and k. If $k \in f(x)$, Scott-openness of $f^{-1}(\mathrm{memOpen}\, k)$ (`isScottOpen_iff_isOpen`, preimage of the open set $\mathrm{memOpen}\, k$ by `isOpen_memOpen`) gives a union of basic neighborhoods $\mathrm{basicNhhd}\, n$ covering x; some $e_n \subseteq x$ still carries $k \in f(e_n)$, hence $k \in \mathrm{scottUnion}\, f\, x$ by `mem_scottUnion`. If $k \in \mathrm{scottUnion}\, f\, x$, pick n with $e_n \subseteq x$ and $k \in f(e_n)$; then $e_n \in f^{-1}(\mathrm{memOpen}\, k)$, and upward closure (`isScottOpen_isUpper`) with $e_n \subseteq x$ puts x in that preimage, so $k \in f(x)$. Thus `out` holds. ■

Theorem (`IsScottOpen.univ`). The whole space $\mathbf{P}\omega$ is Scott-open.

Proof. It is open in the Scott topology. ■

Theorem (`IsScottOpen.empty`). The empty set is Scott-open.

Proof. It is open in the Scott topology. ■

Theorem (`IsScottOpen.union`). The union of two Scott-open sets is Scott-open.

Proof. Openness is preserved by binary unions. ■

Theorem (`IsScottOpen.inter`). The intersection of two Scott-open sets is Scott-open.

Proof. Openness is preserved by binary intersections. ■

Theorem (`IsScottOpen.iUnion`). An arbitrary union of Scott-open sets is Scott-open.

Proof. Openness is preserved by arbitrary unions. ■

Theorem (`IsScottOpen.mem_iff`). If U is Scott-open, then $x \in U$ if and only if some finite $e_n \subseteq x$ already lies in U.

Proof. Unpack the basic-neighbourhood presentation of U, or use upward closure on a finite witness. ■

Theorem (`IsScottContinuous.mem_preimage`). If f is Scott-continuous, then $\{x \mid k \in f(x)\}$ is Scott-open.

Proof. It is the preimage of the subbasic open $\mathrm{memOpen}\, k$. ■

Theorem (`IsScottContinuous.not_subset`). If f is Scott-continuous, then $\{x \mid f(x) \not\subseteq e\}$ is Scott-open.

Proof. Write the set as a union over $k \notin e$ of the preimages $\{x \mid k \in f(x)\}$. ■

Theorem (`IsScottContinuous.subset_preimage`). If f is Scott-continuous and e is finite, then $\{x \mid e \subseteq f(x)\}$ is Scott-open.

Proof. Intersect the finitely many preimages $\{x \mid k \in f(x)\}$ for $k \in e$. ■

Theorem (`IsScottContinuous.ne_eq_open_union_closed`). If f is Scott-continuous and e is finite, then $\{x \mid f(x) \neq e\}$ is the union of $\{x \mid f(x) \not\subseteq e\}$ with the complement of $\{x \mid e \subseteq f(x)\}$, and those two pieces are respectively open and co-open.

Proof. Inequality of sets is failure of either inclusion; apply the two previous facts. ■

`scottPiece.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottPiece (f : Pomega → Pomega) (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ f (e n)}

end DomainTheory.DataTypesAsLattices
```

`scottUnion.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottPiece
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottUnion (f : Pomega → Pomega) (x : Pomega) : Pomega :=
  ⋃ n, scottPiece f x n

end DomainTheory.DataTypesAsLattices
```

`mem_scottUnion.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem mem_scottUnion {f : Pomega → Pomega} {x : Pomega} {k : ℕ} :
    k ∈ scottUnion f x ↔ ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
  constructor
  · intro hk
    obtain ⟨n, hn, hfk⟩ := Set.mem_iUnion.mp hk
    exact ⟨n, hn, hfk⟩
  · intro ⟨n, hn, hk⟩
    exact Set.mem_iUnion.mpr ⟨n, hn, hk⟩

end DomainTheory.DataTypesAsLattices
```

IsScottOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def IsScottOpen (U : Set Pomega) : Prop :=
  ∃ B : Set ℕ, U = ⋃ n ∈ B, basicNhhd n

end DomainTheory.DataTypesAsLattices
```

IsScottOpen_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
import Mathlib.Tactic.Bound.Init

@[expose] public section
```

```
namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

namespace IsScottOpen

theorem univ : IsScottOpen (Set.univ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_univ

theorem empty : IsScottOpen (∅ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_empty

theorem union {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∪ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).union ((isScottOpen_iff_isOpen _).mp hV))

theorem inter {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∩ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).inter ((isScottOpen_iff_isOpen _).mp hV))

theorem iUnion {ι : Type*} (U : ι → Set Pomega) (hU : ∀ i, IsScottOpen (U i)) :
    IsScottOpen (⋃ i, U i) :=
  (isScottOpen_iff_isOpen _).mpr (isOpen_iUnion fun i => (isScottOpen_iff_isOpen _).mp
    (hU i))

theorem mem_iff {U : Set Pomega} (hU : IsScottOpen U) {x : Pomega} :
    x ∈ U ↔ ∃ n, e n ⊆ x ∧ e n ∈ U := by
  constructor
  · intro hx
    obtain ⟨B, rfl⟩ := hU
    obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
    exact ⟨n, hxn, Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩⟩
  · intro ⟨n, hn, hne⟩
    exact isScottOpen_isUpper hU hne hn

end IsScottOpen

end DomainTheory.DataTypesAsLattices
```

IsScottContinuous.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.Continuous.isOpen_memOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import Mathlib.Tactic.Bound.Init
import Mathlib.Data.Set.Finite.Basic
```

```
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

class IsScottContinuous (f : Pomega → Pomega) : Prop where
  out : ∀ x, f x = scottUnion f x

namespace IsScottContinuous

theorem monotone {f : Pomega → Pomega}
    (hf : IsScottContinuous f) {x y : Pomega} (h : x ⊆ y) : f x ⊆ f y := by
  intro m hm
  rw [hf.out x, mem_scottUnion] at hm
  rw [hf.out y, mem_scottUnion]
  obtain ⟨n, hn, hmn⟩ := hm
  exact ⟨n, subset_trans hn h, hmn⟩

theorem determined {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g)
    (hfin : ∀ n, f (e n) = g (e n)) : f = g := by
  funext x
  rw [hf.out x, hg.out x]
  simp [scottUnion, scottPiece, hfin]

theorem iff_continuous (f : Pomega → Pomega) :
    IsScottContinuous f ↔ Continuous f := by
  constructor
  · intro hf
    refine continuous_generateFrom_iff.2 ?_
    rintro _ ⟨k, rfl⟩
    rw [← isScottOpen_iff_isOpen]
    refine ⟨{n | k ∈ f (e n)}, ?_⟩
    ext x
    constructor
    · intro hx
      have : k ∈ scottUnion f x := by rwa [← hf.out x]
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
      exact Set.mem_iUnion₂.mpr ⟨n, hkn, hn⟩
    · intro hx
      obtain ⟨n, hkn, hn⟩ := Set.mem_iUnion₂.mp hx
      exact monotone hf hn hkn
  · intro hfcont
    constructor
    intro x
    ext k
    have hopen : IsScottOpen (f ^-1' memOpen k) :=
      (isScottOpen_iff_isOpen _).mpr (IsOpen.preimage hfcont (isOpen_memOpen k))
    constructor
    · intro hk
      obtain ⟨B, hB⟩ := hopen
      have hx : x ∈ ⋃ n ∈ B, basicNhhd n := by
        have : x ∈ f ^-1' memOpen k := hk
        rwa [hB] at this
```

```
      obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
      have hen : k ∈ f (e n) := by
        have : e n ∈ f ^-1' memOpen k := by
          rw [hB]
          exact Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩
        exact this
      exact mem_scottUnion.mpr ⟨n, hxn, hen⟩
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e n ∈ f ^-1' memOpen k := hkn
      exact isScottOpen_isUpper hopen this hn

theorem mem_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f) (k : ℕ) :
    IsScottOpen {x | k ∈ f x} := by
  have : {x | k ∈ f x} = f ^-1' memOpen k := rfl
  rw [this, isScottOpen_iff_isOpen]
  exact IsOpen.preimage ((IsScottContinuous.iff_continuous f).mp hf) (isOpen_memOpen k
    )

theorem not_subset {f : Pomega → Pomega} (hf : IsScottContinuous f)
    (e : Pomega) : IsScottOpen {x | ¬ f x ⊆ e} := by
  have : {x | ¬ f x ⊆ e} = ⋃ k, {x | k ∈ e ∧ k ∈ f x} := by
    ext x
    constructor
    · intro hx
      obtain ⟨k, hk, hke⟩ := Set.not_subset.mp hx
      exact Set.mem_iUnion.mpr ⟨k, ⟨hke, hk⟩⟩
    · intro hx
      obtain ⟨k, hke, hk⟩ := Set.mem_iUnion.mp hx
      intro hsub
      exact hke (hsub hk)
  rw [this]
  exact IsScottOpen.iUnion _ fun k => by
    by_cases hke : k ∈ e
    · have : {x | k ∈ e ∧ k ∈ f x} = (∅ : Set Pomega) := by
        ext x; simp [hke]
      rw [this]; exact IsScottOpen.empty
    · have : {x | k ∈ e ∧ k ∈ f x} = {x | k ∈ f x} := by
        ext x; simp [hke]
      rw [this]; exact mem_preimage hf k

theorem subset_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) : IsScottOpen {x | e ⊆ f x} := by
  have : {x | e ⊆ f x} = ⋂ k ∈ he.toFinset, {x | k ∈ f x} := by
    ext x
    constructor
    · intro hx
      exact Set.mem_iInter₂.mpr fun k hk => hx (he.mem_toFinset.mp hk)
    · intro hx k hk
      exact Set.mem_iInter₂.mp hx k (he.mem_toFinset.mpr hk)
  rw [this, isScottOpen_iff_isOpen]
  exact isOpen_biInter_finset fun k _ =>
    (isScottOpen_iff_isOpen _).mp (mem_preimage hf k)

theorem ne_eq_open_union_closed {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) :
```

```
    {x | f x = e} = {x | ¬ f x ⊆ e} ∪ {x | ¬ e ⊆ f x} ∧
      IsScottOpen {x | ¬ f x ⊆ e} ∧
      IsScottOpen {x | ¬ e ⊆ f x}? := by
  refine ⟨?_, not_subset hf e, ?_⟩
  · ext x
    constructor
    · intro hne
      by_cases hsub : f x ⊆ e
      · refine Or.inr fun hsup => hne (subset_antisymm hsub hsup)
      · exact Or.inl hsub
    · intro h heq
      rcases h with h | h
      · exact h heq.subset
      · exact h heq.symm.subset
  · have : {x | ¬ e ⊆ f x}? = {x | e ⊆ f x} := by
      ext x; simp
    rw [this]
    exact subset_preimage hf he

end IsScottContinuous

end DomainTheory.DataTypesAsLattices
```

Theorem 1.1 ✓ **THEOREM 1.1** (The characterization theorem). A function $f : \mathbf{P}\omega \to \mathbf{P}\omega$ is *continuous* iff for all $x \in \mathbf{P}\omega$ and all e_m we have:

$$e_m \subseteq f(x) \quad \text{iff} \quad \exists e_n \subseteq x.\ e_m \subseteq f(e_n).$$

Note that open sets and continuous functions have a *monotonicity property*:
whenever $x \subseteq y$ *and* $x \in U$, *then* $y \in U$; *and*
whenever $x \subseteq y$, *then* $f(x) \subseteq f(y)$.

This gives a precise expression to the "positive" character of our topology. However, note too that openness and continuity mean rather more than just monotonicity. In particular, a continuous function is completely determined by the pairs of integers n, m such that $m \in f(e_n)$, as can be seen from the definition. (Hence, there are only a continuum number of continuous functions, but more than a continuum number of monotonic functions.) This brings us to the definition of the *graph* of a continuous function.

As translated into Lean, we have:

Theorem (`theorem_1_1`). For $f : \mathbf{P}\omega \to \mathbf{P}\omega$, f is Scott-continuous iff for all x and m, $e_m \subseteq f(x)$ iff there exists n with $e_n \subseteq x$ and $e_m \subseteq f(e_n)$.

Proof. The forward direction uses `IsScottContinuous.out` and membership in `scottUnion`/`scottPiece`; the converse rebuilds $f(x)$ as a union of pieces from the ε-δ hypothesis. ■

`theorem_1_1.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.exists_e_cover_finite

@[expose] public section
```

```
namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_1 (f : Pomega → Pomega) :
    IsScottContinuous f ↔
      ∀ x m, e m ⊆ f x ↔ ∃ n, e n ⊆ x ∧ e m ⊆ f (e n) := by
  constructor
  · intro hf x m
    constructor
    · intro hmf
      have : ∀ k ∈ e m, ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
        intro k hk
        have : k ∈ scottUnion f x := by
          rw [← hf.out x]; exact hmf hk
        exact mem_scottUnion.mp this
      obtain ⟨s, hs⟩ := (e.finite m).exists_finset_coe
      obtain ⟨N, hN, hsf⟩ := exists_e_cover_finite hf s (fun k hk =>
        this k (by
          have : k ∈ (s : Set ℕ) := hk
          rwa [hs] at this))
      exact ⟨N, hN, by simpa [hs] using hsf⟩
    · intro ⟨n, hn, hmf⟩
      exact subset_trans hmf (IsScottContinuous.monotone hf hn)
  · intro h
    constructor
    intro x
    ext k
    constructor
    · intro hk
      have : e (2 ^ k) ⊆ f x := by
        simp [e.pow2, Set.singleton_subset_iff, hk]
      obtain ⟨n, hn, hkn⟩ := (h x (2 ^ k)).mp this
      refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
      simpa [e.pow2, Set.singleton_subset_iff] using hkn
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e (2 ^ k) ⊆ f (e n) := by
        simp [e.pow2, Set.singleton_subset_iff, hkn]
      have : e (2 ^ k) ⊆ f x := (h x (2 ^ k)).mpr ⟨n, hn, this⟩
      simpa [e.pow2, Set.singleton_subset_iff] using this

end DomainTheory.DataTypesAsLattices
```

2.2.5 Graphs of continuous functions ✓

graph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
@[expose] public section
```

```
namespace DomainTheory.DataTypesAsLattices

def graph (f : Pomega → Pomega) : Pomega :=
  {p | ∃ n m, p = pair n m ∧ m ∈ f (e n)}

def lam (τ : Pomega → Pomega) : Pomega := graph τ

namespace lam

theorem eq_graph (τ : Pomega → Pomega) : lam τ = graph τ := rfl

end lam

end DomainTheory.DataTypesAsLattices
```

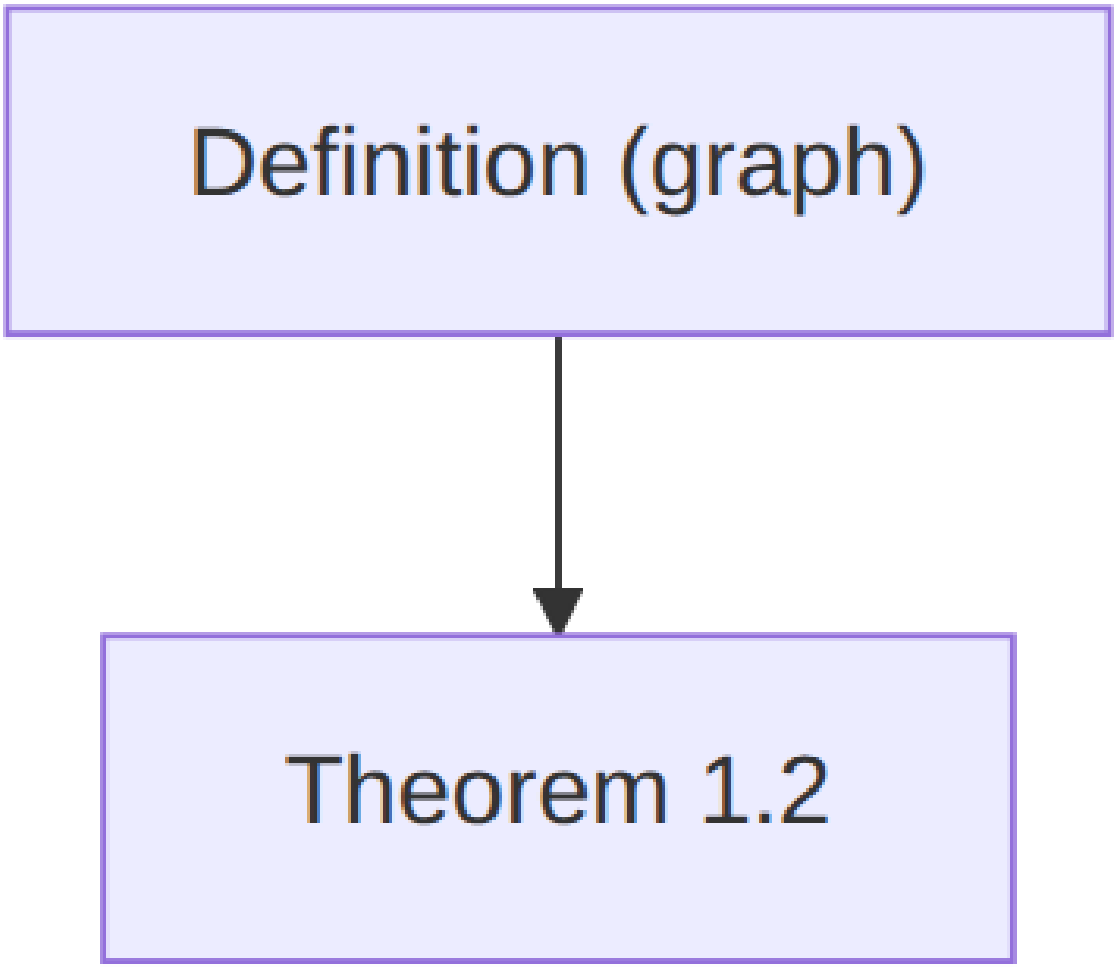

Figure 25: Graphs of continuous functions ✓.

Definition (graph) ✓ **DEFINITION.** The graph of a continuous function $f : \mathbf{P}\omega \to \mathbf{P}\omega$ is defined by the equation:

$$\mathbf{graph}(f) = \{(n, m) \mid m \in f(e_n)\};$$

while the function determined by any set $u \subseteq \omega$ is defined by the equation:

$$\mathbf{fun}(u)(x) = \{m \mid \exists e_n \subseteq x.\ (n, m) \in u\}.$$

IsGraph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

class IsGraph (u : Pomega) : Prop where
  out : ∀ {{k m n}}, pair k m ∈ u → e k ⊆ e n → pair n m ∈ u

end DomainTheory.DataTypesAsLattices
```

Theorem 1.2 ✓ **THEOREM 1.2** (The graph theorem). *Every continuous function is uniquely determined by its graph in the sense that:*

(i) $\mathbf{fun}(\mathbf{graph}(f)) = f$.

Conversely, every set of integers determines a continuous function and we have:

(ii) $u \subseteq \mathbf{graph}(\mathbf{fun}(u))$,

where equality holds just in case u satisfies:

(iii) *whenever $(k, m) \in u$ and $e_k \subseteq e_n$, then $(n, m) \in u$.*

Besides functions of one variable we need to consider also functions of several variables. The official definition for one variable given above can be extended simply by saying $f(x, y, \dots)$ is continuous iff it is continuous in each of $x, y, \dots$. Those familiar with the product topology can prove that for our special positive topology on $\mathbf{P}\omega$ this is equivalent to being continuous on the product space (continuous in the variables jointly). Those interested only in elementary proofs can calculate out directly from the definition (with the aid of 1.1) that continuity behaves under combinations by substitution [as in: $f(g(x, y), h(y, x, y))$].

Proof of Theorem 1.2. Equation (i) as a functional equation comes down to

$$\{m \mid \exists e_n \subseteq x.\ m \in f(e_n)\} = f(x),$$

which is just another way of writing the definition of continuity. Thus it is indeed true for all x. Next, inclusion (ii) means that if $(n, m) \in u$, then $\exists e_k \subseteq e_n.\ (k, m) \in u$. Clearly all we need to do is take $k = n$. If we also want the converse inclusion to hold, then what we need is condition (iii).

theorem_1_2.lean

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Graph.funOf
public import DomainTheory.DataTypesAsLattices.Graph.IsGraph
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Graph.mem_graph

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_2.i {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    funOf (graph f) = f := by
  funext x
  ext m
  constructor
  · intro ⟨n, hn, hp⟩
    obtain ⟨n', m', heq, hm'⟩ := hp
    obtain ⟨rfl, rfl⟩ := pair_inj heq
    exact IsScottContinuous.monotone hf hn hm'
  · intro hm
    have : m ∈ scottUnion f x := by
      rw [← hf.out x]; exact hm
    obtain ⟨n, hn, hmn⟩ := mem_scottUnion.mp this
    exact ⟨n, hn, ⟨n, m, rfl, hmn⟩⟩

theorem theorem_1_2.ii (u : Pomega) : u ⊆ graph (funOf u) := by
  intro p hp
  obtain ⟨n, m, rfl⟩ := exists_pair p
  exact ⟨n, m, rfl, ⟨n, subset_rfl, hp⟩⟩

theorem theorem_1_2.iii (u : Pomega) :
    graph (funOf u) = u ↔ IsGraph u := by
  constructor
  · intro heqGraph
    constructor
    intro k m n hkm hkn
    have hmem : pair k m ∈ graph (funOf u) := heqGraph.symm ▸ hkm
    rcases mem_graph.mp hmem with ⟨k', m', hp, hmfun⟩
    have hk : k = k' := (pair_inj hp).1
    have hm : m = m' := (pair_inj hp).2
    have hmfun' : m ∈ funOf u (e k) := by
      rw [hk, hm]; exact hmfun
    rcases hmfun' with ⟨j, hj, hpj⟩
    have hgraph : pair n m ∈ graph (funOf u) :=
      mem_graph.mpr ⟨n, m, rfl, ⟨j, subset_trans hj hkn, hpj⟩⟩
```

```
    exact heqGraph ▶ hgraph
  · intro hu
    apply subset_antisymm
    · intro p hp
      rcases hp with ⟨n, m, rfl, ⟨k, hk, hkm⟩⟩
      exact hu.out hkm hk
    · exact theorem_1_2.ii u

theorem theorem_1_2 {f : Pomega → Pomega} (hf : IsScottContinuous f) (u : Pomega) :
    funOf (graph f) = f ∧ u ⊆ graph (funOf u) ∧
      (graph (funOf u) = u ↔ IsGraph u) :=
  ⟨theorem_1_2.i hf, theorem_1_2.ii u, theorem_1_2.iii u⟩

end DomainTheory.DataTypesAsLattices
```

2.2.6 Fixed points and least fixed points

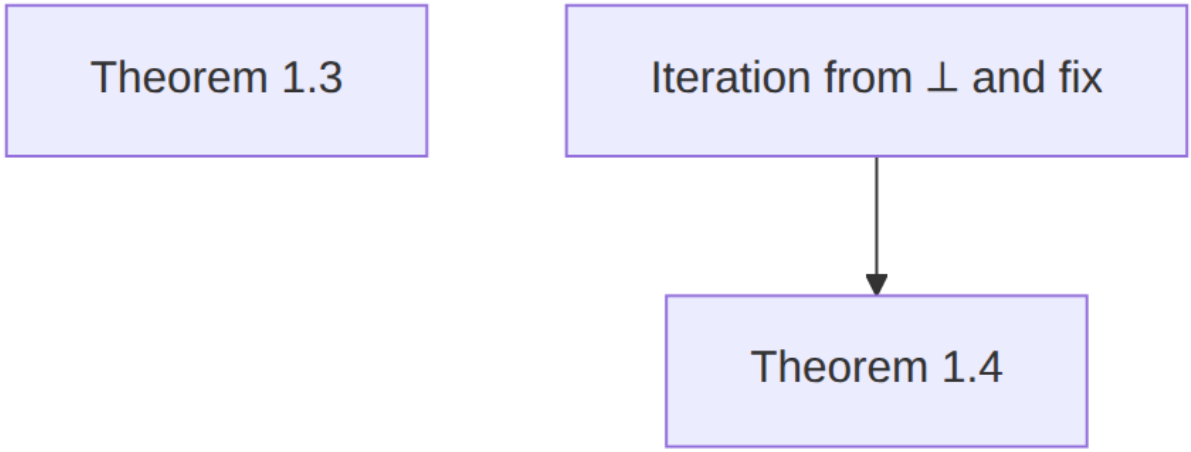

Figure 26: Fixed points and least fixed points.

Theorem 1.3 ✓ **THEOREM 1.3** (The substitution theorem). *Continuous functions of several variables on* $\mathbf{P}\omega$ *are closed under substitution.*

Proof of Theorem 1.3. Substitution is generalized composition of functions of many variables with all possible identifications and permutations of the variables; however, as we are able to define continuity by separating the variables, the argument reduces to a few special cases. The first trick is to take advantage of monotonicity. Thus, suppose $f(x, y)$ is continuous in each of its variables. What can we say of $f(x, x)$, a very special case of substitution? We calculate

$$f(x,x) = \bigcup\{f(e_n, x) \mid e_n \subseteq x\}$$

$$= \bigcup\{f(e_n, e_m) \mid e_n \subseteq x,\ e_m \subseteq x\}.$$

Then if we think of $e_k = e_n \cup e_m$ and realize that $f(e_n, e_m) \subseteq f(e_k, e_k)$, we see that

$$f(x,x) = \bigcup\{f(e_k, e_k) \mid e_k \subseteq x\}.$$

This means that $f(x,x)$ is continuous in x. This same argument works if other variables are present, as in the passage from $f(x,y,z,w)$ to $f(x,x,z,w)$. When an identification of more than two variables is required, as from $f(x,y,z,w)$ to $f(x,x,x,x)$, the principle is just applied several times.

Finally, to show that $f(g(x,y), h(y,x,y))$ is continuous, it is sufficient to show that $f(g(x,y), h(z,u,v))$ is continuous in each of its variables separately. By simply overlooking the remaining variables, this comes down to showing that $f(g(x))$ is continuous if f and g are. But the proof for ordinary composition is very easy with the aid of the characterization theorem (Theorem 1.1).

Formalization. In `theorem_1_3.lean`, namespace `theorem_1_3` holds the special cases; callers use `theorem_1_3.comp`, `theorem_1_3.diag`, etc. The paper's unary composition clause is the top-level theorem `theorem_1_3`.

Lemma (`theorem_1_3.comp`). If f and g are Scott-continuous, then $f \circ g$ is Scott-continuous.

Proof. Membership in $f(g(x))$ is routed through Theorem 1.1 on $g(x)$ and $f(g(x))$, using `mem_scottUnion` and monotonicity. ■

Lemma (`theorem_1_3.diag`). If $F(x,y)$ is continuous in x for each fixed y and in y for each fixed x, then $x \mapsto F(x,x)$ is Scott-continuous; equivalently $F(x,x) = \bigcup\{k \mid \exists n.\, e_n \subseteq x \wedge k \in F(e_n, e_n)\}$.

Proof. Scott's calculation on $f(x,x)$ via $e_n \subseteq x$ and $e_k = e_n \cup e_m$. ■

Lemma (`theorem_1_3.tuple`). Under the same separate-continuity hypothesis on $F(x,y)$, if g and h are Scott-continuous then $x \mapsto F(g(x), h(x))$ is Scott-continuous.

Proof. Apply `theorem_1_3.diag` to $(u,v) \mapsto F(g(u), h(v))$ with `theorem_1_3.comp` on each coordinate. ■

Lemma (`theorem_1_3.nary`). If $F(x,y,z)$ is continuous in each argument separately and g, h, i are Scott-continuous, then $x \mapsto F(g(x), h(x), i(x))$ is Scott-continuous.

Proof. Same pattern: `theorem_1_3.diag` on $(u,v) \mapsto F(g(u), h(u), i(v))$, with `theorem_1_3.tuple` and `theorem_1_3.comp`. ■

Theorem (`theorem_1_3`). If f and g are Scott-continuous, then $x \mapsto f(g(x))$ is Scott-continuous.

Proof. `theorem_1_3.comp`. ■

Corollary (Functionality wrappers). `continuous_on_diag`, `continuous_tuple`, and `continuous_nary` restate the diagonal, binary, and ternary substitution cases for call sites that prefer those names; their proofs invoke `theorem_1_3.diag`, `theorem_1_3.tuple`, and `theorem_1_3.comp` respectively.

`theorem_1_3.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.theorem_1_1

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_1_3

theorem comp {f g : Pomega → Pomega}
```

```
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (f ∘ g) := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
    have hk' : k ∈ f (g x) := hk
    have := (theorem_1_1 f).mp hf (g x) (2 ^ k)
    have hfin : e (2 ^ k) ⊆ f (g x) := by
      simpa [e.pow2, Set.singleton_subset_iff] using hk'
    obtain ⟨m, hm, hkm⟩ := this.mp hfin
    have := (theorem_1_1 g).mp hg x m
    obtain ⟨n, hn, hmn⟩ := this.mp hm
    refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
    have : e (2 ^ k) ⊆ f (g (e n)) :=
      subset_trans hkm (IsScottContinuous.monotone hf hmn)
    simpa [e.pow2, Set.singleton_subset_iff] using this
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    exact IsScottContinuous.monotone hf (IsScottContinuous.monotone hg hn) hkn

theorem diag {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {x : Pomega} :
    f x x = ⋃ n, {k | e n ⊆ x ∧ k ∈ f (e n) (e n)} := by
  apply subset_antisymm
  · intro k hk
    have : k ∈ scottUnion (fun z => f z x) x := by
      rw [← (hfx x).out x]; exact hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
    have : k ∈ scottUnion (fun y => f (e n) y) x := by
      rw [← (hfy (e n)).out x]; exact hkn
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp this
    refine Set.mem_iUnion.mpr ⟨n ||| m, ?_⟩
    refine ⟨e.or_of_subset hn hm, ?_⟩
    have hle : e n ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_left
    have hre : e m ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_right
    exact IsScottContinuous.monotone (hfy (e (n ||| m))) hre
      (IsScottContinuous.monotone (hfx (e m)) hle hkm)
  · intro k hk
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp hk
    exact IsScottContinuous.monotone (hfy x) hn
      (IsScottContinuous.monotone (hfx (e n)) hn hkn)

theorem tuple {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {g h : Pomega → Pomega} (hg : IsScottContinuous g) (hh : IsScottContinuous h) :
    IsScottContinuous (fun x => f (g x) (h x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h v))
    (fun v => comp (hfx (h v)) hg)
```

```
    (fun u => comp (hfy (g u)) hh)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} := by rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

theorem nary {f : Pomega → Pomega → Pomega → Pomega}
    (hf0 : ∀ y z, IsScottContinuous (fun x => f x y z))
    (hf1 : ∀ x z, IsScottContinuous (fun y => f x y z))
    (hf2 : ∀ x y, IsScottContinuous (fun z => f x y z))
    {g h i : Pomega → Pomega}
    (hg : IsScottContinuous g) (hh : IsScottContinuous h) (hi : IsScottContinuous i) :
    IsScottContinuous (fun x => f (g x) (h x) (i x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h u) (i v))
    (fun v => tuple (fun y => hf0 y (i v)) (fun x => hf1 x (i v)) hg hh)
    (fun u => comp (hf2 (g u) (h u)) hi)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} := by
      rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

end theorem_1_3

/-- Scott Theorem 1.3 (unary composition case). -/
theorem theorem_1_3 {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (fun x => f (g x)) :=
  theorem_1_3.comp hf hg

end DomainTheory.DataTypesAsLattices
```

Iteration from $\bot$ and fix The other general fact about continuous functions that we shall use constantly concerns fixed points, whose existence can be proved using a well-known method.

Scott's least fixed point is built from iterating f starting at the empty set $\varnothing$ (our $\bot$):

$$\mathbf{fix}(f) = \bigcup\{f^n(\varnothing) \mid n \in \omega\},$$

where $f^0(\varnothing) = \varnothing$ and $f^{n+1}(\varnothing) = f(f^n(\varnothing))$.

Definition (`iterateBot`, `fix`). For $f : \mathbf{P}\omega \to \mathbf{P}\omega$, set $\mathrm{iterateBot}\, f\, 0 = \bot$ and $\mathrm{iterateBot}\, f\, (n+1) = f(\mathrm{iterateBot}\, f\, n)$; then $\mathrm{fix}\, f = \bigcup_n \mathrm{iterateBot}\, f\, n$.

Lemma (`iterateBot_mono`). If f is Scott-continuous, then $\mathrm{iterateBot}\, f\, n \subseteq \mathrm{iterateBot}\, f\, (n+1)$ for every n.

Proof. By induction: the base case is $\bot \subseteq f(\bot)$; the step applies monotonicity of f to the induction hypothesis. ■

`iterateBot.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.eDense
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def iterateBot (f : Pomega → Pomega) : ℕ → Pomega
  | 0 => botElem
  | n + 1 => f (iterateBot f n)

end DomainTheory.DataTypesAsLattices
```

`fix.lean`

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def fix (f : Pomega → Pomega) : Pomega :=
  ⋃ n, iterateBot f n

end DomainTheory.DataTypesAsLattices
```

Theorem 1.4 **THEOREM 1.4** (The fixed-point theorem). *Every continuous function $f : \mathbf{P}\omega \to \mathbf{P}\omega$ has a least fixed point given by the formula $\mathbf{fix}(f) = \bigcup\{f^n(\varnothing) \mid n \in \omega\}$ (see iteration from $\bot$).*

Actually **fix** is a *functional* with continuity properties of its own. We shall not give the required definitions here because they can be more easily derived from the construction of the model given in the next section.

For those familiar with the abstract theory of topological spaces we give in conclusion two general facts about continuous functions with values in $\mathbf{P}\omega$ which indicate the scope and generality of our method.

Proof of Theorem 1.4. This well-known fact holds for continuous functions on many kinds of chain-complete partial orderings; but $\mathbf{P}\omega$ illustrates the idea well enough. Suppose f had a fixed point $x = f(x)$.

Then since $\varnothing \subseteq x$ and f is monotonic, we see that $f(\varnothing) \subseteq f(x) = x$. But then again, $f(f(\varnothing)) \subseteq f(x) = x$; and so by induction, $f^n(\varnothing) \subseteq x$. This proves that $\mathbf{fix}(f) \subseteq x$; and thus if $\mathbf{fix}(f)$ is a fixed point, it must be the least one. To prove that it is a fixed point, we need a fact that will often be useful:

LEMMA (`chain_lemma`). *If $x_n \subseteq x_{n+1}$ for all n, and if f is continuous, then*

$$f\Big(\bigcup\{x_n \mid n \in \omega\}\Big) = \bigcup\{f(x_n) \mid n \in \omega\}.$$

Proof. By monotonicity, the inclusion holds in one direction. Suppose $e_m \subseteq f(\bigcup\{x_n \mid n \in \omega\})$. Then by Theorem 1.1 we have $e_m \subseteq f(e_k)$ for some $e_k \subseteq \bigcup\{x_n \mid n \in \omega\}$. Because e_k is finite and the sequence is increasing, we can argue that $e_k \subseteq x_n$ for some n. But then $f(e_k) \subseteq f(x_n)$. This shows that $e_m \subseteq \bigcup\{f(x_n) \mid n \in \omega\}$ and proves the inclusion in the other direction. (*Exercise:* Does this property characterize continuous functions?)

Proof of Theorem 1.4 concluded. Noting that $f^n(\varnothing) \subseteq f^{n+1}(\varnothing)$ holds for all n, we can calculate:

$$f(\mathbf{fix}(f)) = \bigcup\{f(f^n(\varnothing)) \mid n \in \omega\} = \bigcup\{f^{n+1}(\varnothing) \mid n \in \omega\}.$$

But this is just $\mathbf{fix}(f)$, since the only term left out is $f^0(\varnothing) = \varnothing$.

Formalization. `theorem_1_4` is Scott's statement; the proof uses `chain_lemma` (via `exists_index_of_finset` and `chain_mono`).

`theorem_1_4.lean`

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.chain_lemma
public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot_mono

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_4 {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    f (fix f) = fix f ∧ ∀ x, f x = x → fix f ⊆ x := by
  constructor
  ·
    have hchain := chain_lemma hf (iterateBot f) (iterateBot_mono hf)
    unfold fix
    rw [hchain]
    ext k
    constructor
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      exact Set.mem_iUnion.mpr ⟨n + 1, hkn⟩
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      cases n with
      | zero => simp [iterateBot, botElem] at hkn
      | succ n => exact Set.mem_iUnion.mpr ⟨n, hkn⟩
  · intro x hx k hk
    obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
    have hsub : ∀ n, iterateBot f n ⊆ x := by
      intro n
      induction n with
```

```
      | zero => simp [iterateBot, botElem]
      | succ n ih =>
        simpa [iterateBot, hx] using IsScottContinuous.monotone hf ih
    exact hsub n hkn

end DomainTheory.DataTypesAsLattices
```

2.2.7 Extension and embedding of continuous maps

memOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def memOpen (k : ℕ) : Set Pomega := {x | k ∈ x}

namespace memOpen

theorem eq_basicNhhd (k : ℕ) : memOpen k = basicNhhd (2 ^ k) := by
  ext x
  simp [memOpen, basicNhhd, e.pow2, Set.singleton_subset_iff]

end memOpen

end DomainTheory.DataTypesAsLattices
```

Basic.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

instance : TopologicalSpace Pomega :=
  .generateFrom (Set.range memOpen)
end DomainTheory.DataTypesAsLattices
```

extend.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import Mathlib.Data.Set.Lattice.Indexed
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def extend {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (y : Y) : Pomega :=
  ⋃₀ { t | ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ t = ⋂₀ (f '' {x : X | ↑x ∈ U}) }

namespace extend

theorem mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) {y : Y} {k : ℕ} :
    k ∈ extend (Y := Y) (X := X) f y ↔
      ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x := by
  constructor
  · intro hk
    rcases Set.mem_sUnion.mp hk with ⟨t, ⟨U, hU, hy, rfl⟩, hkt⟩
    refine ⟨U, hU, hy, ?_⟩
    intro x hx
    exact Set.mem_sInter.mp hkt (f x) ⟨x, hx, rfl⟩
  · intro ⟨U, hU, hy, hall⟩
    refine Set.mem_sUnion.mpr ⟨⋂₀ (f '' {x : X | ↑x ∈ U}), ⟨U, hU, hy, rfl⟩, ?_⟩
    intro t ht
    rcases ht with ⟨x, hx, rfl⟩
    exact hall x hx

theorem isOpen_mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (k : ℕ) :
    IsOpen {y : Y | k ∈ extend (Y := Y) (X := X) f y} := by
  have : {y : Y | k ∈ extend (Y := Y) (X := X) f y} =
      ⋃ U ∈ {U : Set Y | IsOpen U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x}, U := by
    ext y
    constructor
    · intro hy
      obtain ⟨U, hU, hyU, hall⟩ := (mem f).mp hy
      exact Set.mem_iUnion₂.mpr ⟨U, ⟨hU, hall⟩, hyU⟩
    · intro hy
      obtain ⟨U, hU, hyU⟩ := Set.mem_iUnion₂.mp hy
      exact (mem f).mpr ⟨U, hU.1, hyU, hU.2⟩
  rw [this]
  exact isOpen_biUnion fun _ hU => hU.1

end extend
```

```
end DomainTheory.DataTypesAsLattices
```

basicNhhd_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.Lattice.Indexed
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace basicNhhd

theorem eq_iInter (n : ℕ) :
    basicNhhd n = ⋂ k ∈ e n, memOpen k := by
  ext x
  simp [basicNhhd, memOpen, Set.subset_def]

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

embed.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def embed {X : Type*} (U : ℕ → Set X) (x : X) : Pomega :=
  {n | x ∈ U n}

namespace embed

theorem continuous {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Continuous (embed U) :=
  continuous_generateFrom_iff.2 fun t ⟨n, hn⟩ => by
```

```
    subst hn
    change IsOpen (U n)
    exact hbasis.isOpen ⟨n, rfl⟩

theorem inducing {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    IsInducing (embed U) := by
  refine ⟨?_⟩
  rw [hbasis.eq_generateFrom]
  change generateFrom (Set.range U) =
    (generateFrom (Set.range memOpen)).induced (embed U)
  rw [induced_generateFrom_eq]
  congr 1
  ext V
  constructor
  · rintro ⟨n, rfl⟩
    exact ⟨memOpen n, ⟨n, rfl⟩, rfl⟩
  · rintro ⟨_, ⟨n, rfl⟩, rfl⟩
    exact ⟨n, rfl⟩

theorem injective {X : Type*} [TopologicalSpace X] [T0Space X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Injective (embed U) := by
  intro x y hxy
  have hmem : ∀ n, x ∈ U n ↔ y ∈ U n := fun n =>
    show n ∈ embed U x ↔ n ∈ embed U y by rw [hxy]
  refine Inseparable.eq ?_
  refine inseparable_iff_forall_isOpen.mpr ?_
  intro V hV
  constructor
  · intro hx
    obtain ⟨t, ⟨n, rfl⟩, hxt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hx)
    exact htV ((hmem n).mp hxt)
  · intro hy
    obtain ⟨t, ⟨n, rfl⟩, hyt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hy)
    exact htV ((hmem n).mpr hyt)

end embed

end DomainTheory.DataTypesAsLattices
```

exists_basicNhhd_subset_of_generateOpen.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace
```

```
theorem exists_basicNhhd_subset_of_generateOpen {U : Set Pomega}
    (hU : GenerateOpen (Set.range memOpen) U) {x : Pomega} (hx : x ∈ U) :
    ∃ n, e n ⊆ x ∧ basicNhhd n ⊆ U := by
  induction hU generalizing x with
  | basic s hs =>
    obtain ⟨k, rfl⟩ := hs
    refine ⟨2 ^ k, ?_, ?_⟩
    · simpa [memOpen, e.pow2, Set.singleton_subset_iff] using hx
    · rw [← memOpen.eq_basicNhhd]
  | univ =>
    exact ⟨0, by simp [e.zero], by simp [basicNhhd.zero]⟩
  | inter _s _t _hs _ht ihs iht =>
    obtain ⟨n, hn, hnU⟩ := ihs hx.1
    obtain ⟨m, hm, hmU⟩ := iht hx.2
    refine ⟨n ||| m, e.or_of_subset hn hm, ?_⟩
    rw [← basicNhhd.inter]
    exact Set.inter_subset_inter hnU hmU
  | sUnion S _hS ih =>
    obtain ⟨V, hV, hxV⟩ := hx
    obtain ⟨n, hn, hnV⟩ := ih V hV hxV
    exact ⟨n, hn, hnV.trans (Set.subset_sUnion_of_mem hV)⟩

end DomainTheory.DataTypesAsLattices
```

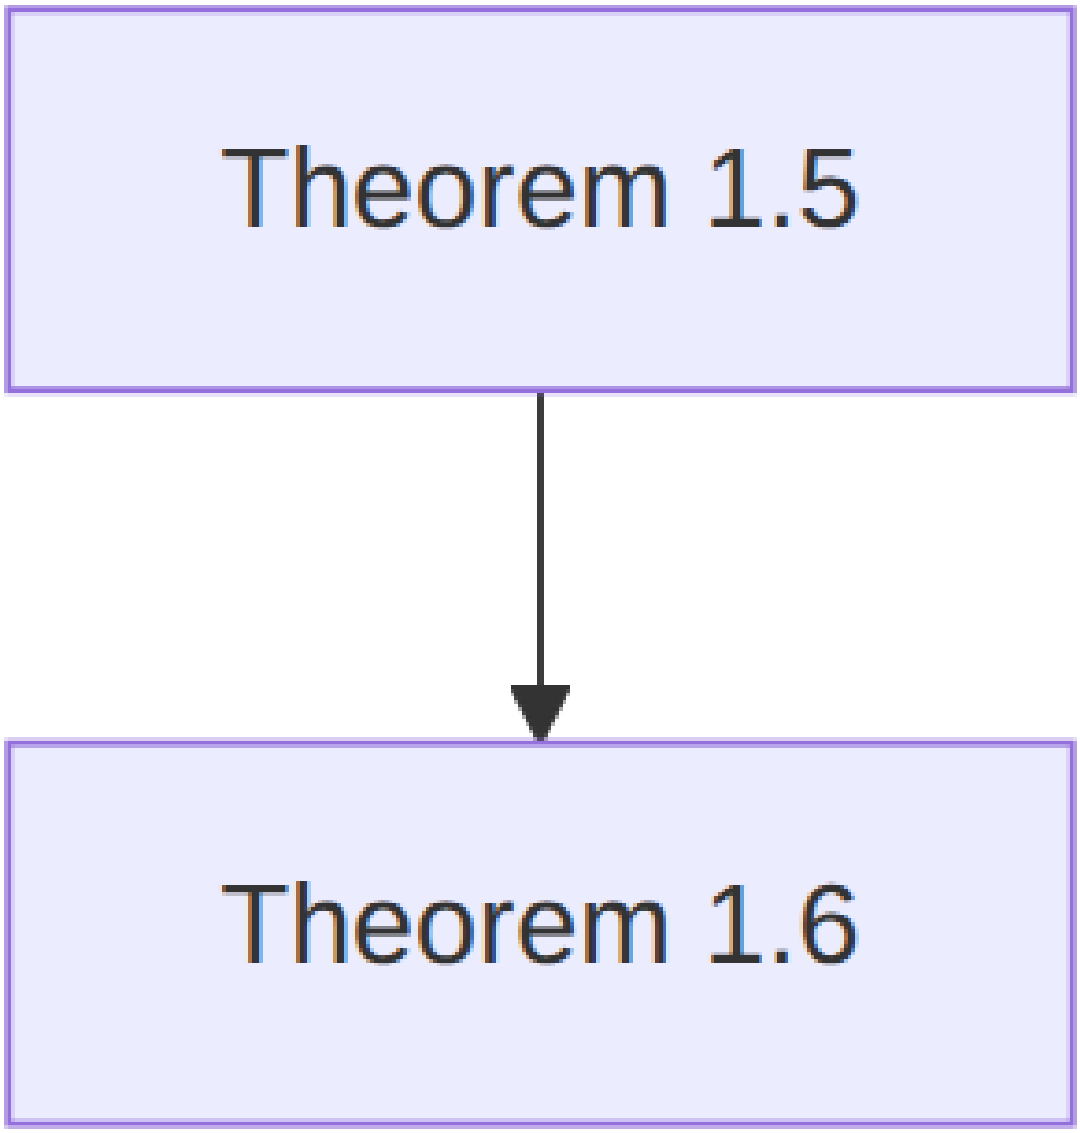

Figure 27: Extension and embedding of continuous maps.

Theorem 1.5 **THEOREM 1.5** (The extension theorem). *Let X and Y be arbitrary topological spaces where $X \subseteq Y$ as a subspace. Then every continuous function $f : X \to \mathbf{P}\omega$ can be extended to a continuous function $\bar{f} : Y \to \mathbf{P}\omega$ defined by the equation:*

$$\bar{f}(y) = \bigcup\{\bigcap\{f(x) \mid x \in X \cap U\} \mid y \in U\},$$

where $y \in Y$, and U ranges over the open subsets of Y.

Proof of Theorem 1.5. The function $\bar{f}$ is clearly well-defined even when $y \in Y$ has a neighborhood U where $X \cap U = \varnothing$: in that case $\bar{f}(y) = \omega$ by convention on the meaning of $\bigcap$ in $\mathbf{P}\omega$. In case $x \in X$, it is obvious that $\bar{f}(x) \subseteq f(x)$. For the opposite inclusion, suppose that $m \in f(x)$. Because f is continuous and $\{z \mid m \in z\}$ is open in $\mathbf{P}\omega$, there is an open subset V of X such that $x' \in V$ always implies that $m \in f(x')$. But X is a subspace of Y, so $V = X \cap U$ for some open subset U of Y. Thus we can see why $m \in \bar{f}(x)$. It remains to show that $\bar{f}$ is itself continuous.

We must show that the inverse image under $\bar{f}$ of every open subset of $\mathbf{P}\omega$ is open in Y. But the open subsets of $\mathbf{P}\omega$ are unions of finite intersections of sets of the form $\{z \mid m \in z\}$. Thus it is enough to show that $\{y \mid m \in \bar{f}(y)\}$ is always open in Y. But this set equals $\bigcup\{U \mid m \in \bigcap\{f(x) \mid x \in X \cap U\}\}$, which being a union of open sets is open. Note that what we have proved is that $\bar{f}$ is continuous no matter what function f is given; however, if f is not continuous, then $\bar{f}$ cannot be an extension of f.

For readers not as familiar with general topology we note that the idea of Theorem 1.5 can be turned into a *definition*. Suppose $X \subseteq \mathbf{P}\omega$ is a subset of $\mathbf{P}\omega$. It becomes a subspace with the relative topology. What are the continuous functions $f : X \to \mathbf{P}\omega$? From Theorem 1.5 we see that a necessary and sufficient condition is that $\bar{f} : \mathbf{P}\omega \to \mathbf{P}\omega$ be an extension of f. Thus for $x \in X$ we can write the equation $f(x) = \bar{f}(x)$ as a biconditional:

$$m \in f(x) \quad \text{iff} \quad \exists e_n \subseteq x \; \forall x' \in X \; [e_n \subseteq x' \text{ implies } m \in f(x')],$$

which is to hold for all $m \in \omega$. This form of the definition of continuity on a subspace is more complicated than the original definition, because in general $e_n \notin X$ and we cannot write $f(e_n)$.

isOpen_memOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.Basic
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

theorem isOpen_memOpen (k : ℕ) : IsOpen (memOpen k) :=
  TopologicalSpace.isOpen_generateFrom_of_mem ⟨k, rfl⟩

end DomainTheory.DataTypesAsLattices
```

isOpen_basicNhhd.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.Basic
import DomainTheory.DataTypesAsLattices.Continuous.isOpen_memOpen
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
open TopologicalSpace

theorem isOpen_basicNhhd (n : ℕ) : IsOpen (basicNhhd n) := by
  obtain ⟨s, hs⟩ := (e.finite n).exists_finset_coe
  have h : basicNhhd n = ⋂ k ∈ s, memOpen k := by
    ext x
    constructor
    · intro hx
      refine Set.mem_iInter₂.mpr ?_
      intro k hk
      have : k ∈ e n := by
        have : k ∈ (s : Set ℕ) := hk
        rwa [hs] at this
      exact hx this
    · intro hx k hk
      have : k ∈ s := by
        have : k ∈ e n := hk
        rwa [← hs] at this
      exact Set.mem_iInter₂.mp hx k this
  rw [h]
  exact isOpen_biInter_finset fun _ _ => isOpen_memOpen _

end DomainTheory.DataTypesAsLattices
```

theorem_1_5.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.isOpen_memOpen
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import DomainTheory.DataTypesAsLattices.Embedding.extend
public import DomainTheory.DataTypesAsLattices.Embedding.embed

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

theorem theorem_1_5 {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) : Continuous (extend (Y := Y) (X := X) f) := by
  refine continuous_generateFrom_iff.2 ?_
  rintro _ ⟨k, rfl⟩
  exact extend.isOpen_mem f k

theorem theorem_1_5.extension {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (hf : Continuous f) (x : X) :
    extend (Y := Y) (X := X) f ↑x = f x := by
  apply subset_antisymm
  · intro k hk
```

```
    obtain ⟨U, _, hxU, hall⟩ := (extend.mem f).mp hk
    exact hall x hxU
  · intro k hk
    have hpre : IsOpen (f ^-1' memOpen k) :=
      IsOpen.preimage hf (isOpen_memOpen k)
    obtain ⟨U, hU, hrel⟩ := isOpen_induced_iff.mp hpre
    refine (extend.mem f).mpr ⟨U, hU, ?_, ?_⟩
    · have : x ∈ Subtype.val ^-1' U := by
        rwa [hrel]
      exact this
    · intro z hz
      have : z ∈ f ^-1' memOpen k := by
        rwa [← hrel]
      exact this

end DomainTheory.DataTypesAsLattices
```

Theorem 1.6 **THEOREM 1.6** (The embedding theorem). *Every T_0-space X with a countable basis $\{U_n \mid n \in \omega\}$ for its topology can be embedded in $\mathbf{P}\omega$ by the continuous function $\varepsilon : X \to \mathbf{P}\omega$ defined by the equation:*

$$\varepsilon(x) = \{n \mid x \in U_n\}.$$

Technically the T_0-hypothesis is what is needed to show that ε is one-to-one. The upshot of these two theorems is that in looking for (reasonable) topological structures we can confine attention to the subspaces of $\mathbf{P}\omega$ and to continuous functions defined on *all* of $\mathbf{P}\omega$. Thus the emphasis on a single space is justified structurally. What we shall see in the remainder of this work is that the use of a single space is also justified practically because the required subspaces and functions can be *defined* in very simple ways by a natural method of equations.

Proof of Theorem 1.6. What T_0 means is that every point of X is uniquely determined by its neighborhoods. Now $\varepsilon(x)$ just tells you the set of indices of the (basic) neighborhoods of x. Thus it is clear that ε is one-to-one. To prove that it is continuous, we need only note:

$$\{x \mid n \in \varepsilon(x)\} = U_n,$$

which is always open. To show that ε is an embedding, we must finally check that the *images* of the open sets U_n are open in $\varepsilon(X)$. This comes down to showing:

$$\varepsilon(U_n) = \varepsilon(X) \cap \{z \mid n \in z\},$$

which is clear.

theorem_1_6.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Embedding.extend
```

```
public import DomainTheory.DataTypesAsLattices.Embedding.embed

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

theorem theorem_1_6 {X : Type*} [TopologicalSpace X] [T0Space X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    IsEmbedding (embed U) where
  toIsInducing := embed.inducing U hbasis
  injective := embed.injective U hbasis

theorem theorem_1_6.injective_continuous {X : Type*} [TopologicalSpace X]
    [T0Space X] (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Injective (embed U) ∧ Continuous (embed U) :=
  ⟨embed.injective U hbasis, embed.continuous U hbasis⟩

end DomainTheory.DataTypesAsLattices
```

2.3 Computability and definability

Historical note. The language LAMBDA is Scott's. Plotkin and Rogers already used graphs, application, and conversion; the abstraction operation is what this section supplies.

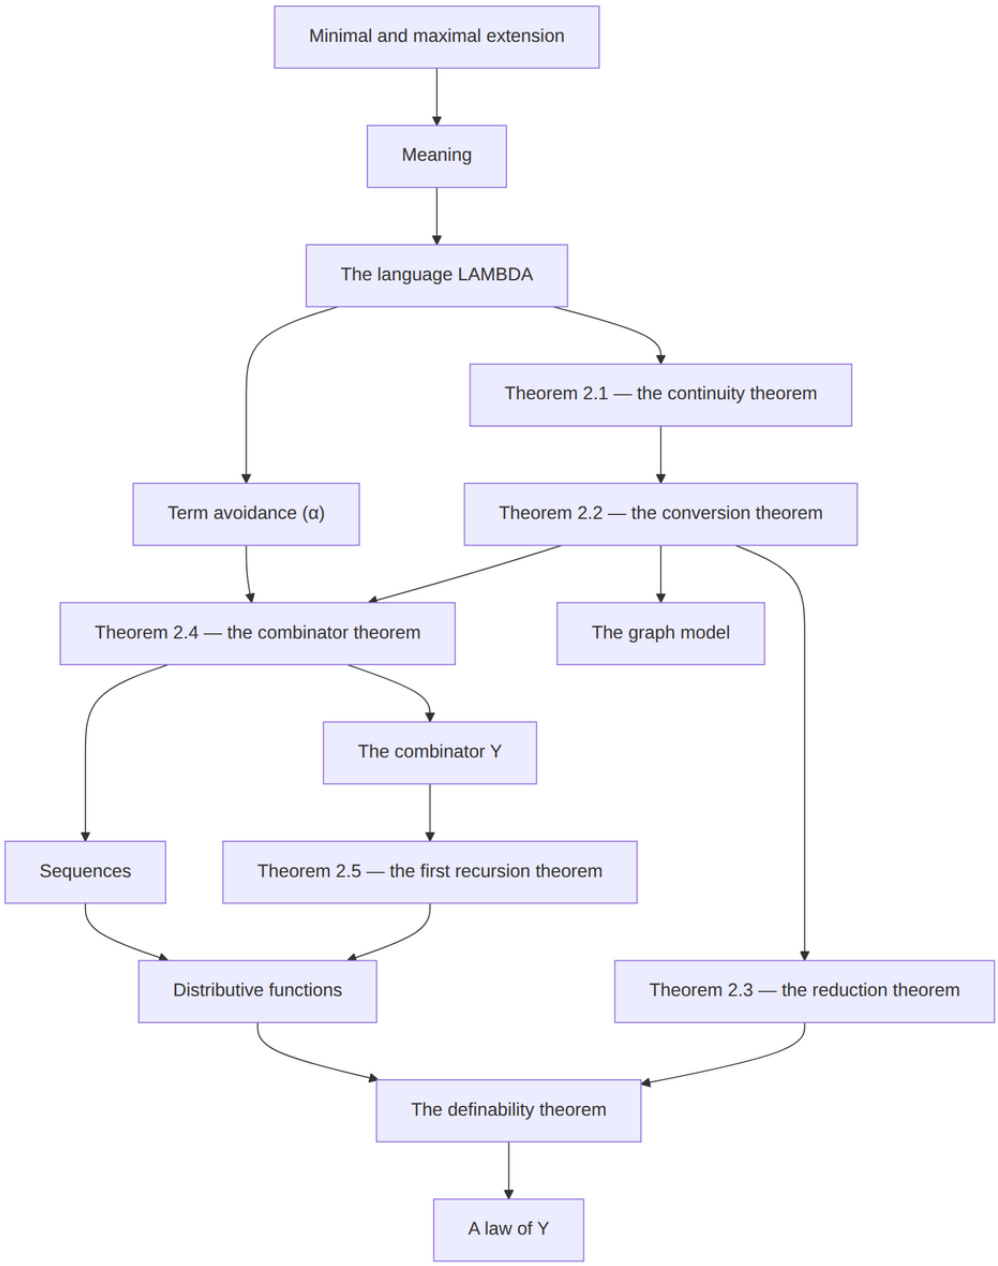

Figure 28: Computability and definability.

2.3.1 Minimal and maximal extension ✓

As a subspace $\omega \subseteq \mathbf{P}\omega$ is discrete. This implies that arbitrary functions $p : \omega \to \omega$ are continuous. Note that $p : \omega \to \mathbf{P}\omega$ as well, because $\omega \subseteq \mathbf{P}\omega$. By Theorem 1.5 we can extend p continuously to $\bar{p} : \mathbf{P}\omega \to \mathbf{P}\omega$. The formula given produces this function:

$$(2.1)\quad \bar{p}(x) = \begin{cases} \bigcap\{p(n) \mid n \in \omega\} & \text{if } x = \varnothing; \\ p(n) & \text{if } x = n \in \omega; \\ \omega & \text{otherwise.} \end{cases}$$

This is a rather abrupt extension of p (the *maximal extension*); a more gradual, continuous extension (the *minimal extension*) is determined by this equation:

$$(2.2)\quad \hat{p}(x) = \bigcup\{p(n) \mid n \in x\}.$$

The same formulae work for *all* multiple-valued functions $p : \omega \to \mathbf{P}\omega$. Functions like $f = \hat{p}$ are exactly characterized as being those continuous functions $f : \mathbf{P}\omega \to \mathbf{P}\omega$ which in addition are *distributive* in the sense of these equations:

$$f(x \cup y) = f(x) \cup f(y) \quad \text{and} \quad f(\varnothing) = \varnothing.$$

Definition (`maxExtend`, `minExtend`). For $p : \omega \to \mathbf{P}\omega$ and $x \in \mathbf{P}\omega$, the maximal extension is $\mathrm{maxExtend}\, p\, x$ (Scott's piecewise $\bar{p}(x)$ in (2.1)), and the minimal extension is $\mathrm{minExtend}\, p\, x = \bigcup\{p(n) \mid n \in x\}$.

Theorem (`eq_2_1_empty`). $\mathrm{maxExtend}\, p\, \bot = \bigcap_n p(n)$.

Proof. On $\bot$, membership in $\mathrm{maxExtend}\, p\, \bot$ is equivalent to $k \in p(n)$ for every n. ■

Theorem (`eq_2_1_singleton`). For $n \in \omega$, $\mathrm{maxExtend}\, p\, (\mathrm{ofNat}\, n) = p(n)$.

Proof. Case-split on the three disjuncts in the definition of $\mathrm{maxExtend}$; the singleton case is the only viable branch. ■

Theorem (`eq_2_1_else`). If $x \neq \bot$ and x is not a singleton $\mathrm{ofNat}\, n$, then $\mathrm{maxExtend}\, p\, x = \top$.

Proof. Every k satisfies the third disjunct in the definition. ■

Theorem (`minExtend.bot`). $\mathrm{minExtend}\, p\, \bot = \bot$.

Theorem (`minExtend.union`). $\mathrm{minExtend}\, p\, (x \cup y) = \mathrm{minExtend}\, p\, x \cup \mathrm{minExtend}\, p\, y$.

Theorem (`minExtend.isScottContinuous`). $\mathrm{minExtend}\, p$ is Scott-continuous for every $p : \omega \to \mathbf{P}\omega$.

Proof. Compare membership in $\mathrm{minExtend}\, p\, x$ with membership in $\mathrm{scottUnion}\, (\mathrm{minExtend}\, p)\, x$ via finite singleton witnesses e_{2^n}. ■

2.3.2 Meaning ✓

The purpose of the first section was to introduce in a simple-minded way the basic notions about the topology of $\mathbf{P}\omega$ and its continuous functions. In this section we wish to present the details of a powerful language for defining *particular* functions—especially computable functions—and initiate the study of the *use* of these functions. This study is then extended in different ways in the following sections.

Before looking at the language, a short discussion of the "meaning" of the elements $x \in \mathbf{P}\omega$ will be helpful from the point of view of motivation. Now in itself $x \in \mathbf{P}\omega$ is a set, but this does not reveal its *meaning*. Actually x has no "fixed" meaning, because it can be *used* in strikingly different ways; we look for meaning here solely in terms of use. Nevertheless it is possible to give some coherent guidelines.

In the first place it is convenient to let the singleton subsets $\{n\} \in \mathbf{P}\omega$ stand for the corresponding integers. In fact, we shall enforce by convention the equation $n = \{n\}$ as a way of simplifying notation. In this way, $\omega \subseteq \mathbf{P}\omega$ as a subset. (Note that our convention conflicts with such set-theoretical equations as $5 = \{0, 1, 2, 3, 4\}$. What we have done is to abandon the usual set-theoretical conventions in favor of a

slight redefinition of *set of integers* which produces a more helpful convention for present purposes.) So, if we choose, a singleton "means" a single integer. The next

question is what a "large" set $x \in \mathbf{P}\omega$ could mean. Here is an answer: if we write:

$$x = \{0, 5, 17\} = 0 \cup 5 \cup 17,$$

we are thinking of x as a *multiple integer*. This is especially useful in the case of multiple-valued function where we can write:

$$f(a) = 0 \cup 5 \cup 17.$$

Then "$m \in f(a)$" can be interpreted as "m is one value of f at a." Now $a \in \mathbf{P}\omega$, too, and so it is a multiple integer also. This brings us to an important point.

A multiple integer is (often) *more* than just the (random) collection of its elements. From the definition of continuity, $m \in f(a)$ is equivalent to $m \in f(e_n)$ with $e_n \subseteq a$. We may not be able to reduce this to $m \in f(\{n\})$ with $n \in a$ without additional assumptions on f. Indeed we shall take advantage of the feature of continuous functions whereby the elements of an argument a can join in *cooperation* in determining $f(a)$. Needless to say, continuity implies that the cooperation cannot extend beyond *finite* configurations, and so we can say that a is the union (or limit) of its finite subsets. However, finitary cooperation will be found to be quite a powerful notion.

Where does this interpretation leave the empty set $\varnothing$? When we write "$f(a) = \varnothing$" we can read this as "f has no value at a", or "f is undefined at a". In this case $f(a)$ exists (as a set), but it is not "defined" as an integer. Single- (or singleton-) valued functions are "well-defined", but multiple-valued functions are rather "over-defined".

How does this interpretation fit in with monotonicity? In case $a \subseteq b$ and $m \in f(a)$, then we must have $m \in f(b)$. We can read "$a \subseteq b$" as "b is an *improvement of* a" or "b is *better-defined than* a." The point of monotonicity is that the better we define an argument, the better we define a value. "Better" does not imply "well" (that is, singleton-valuedness), and overdefinedness may well creep in. This is not the fault of the function; it is our fault for not choosing a different function.

The sets $\varnothing$ and ω play special roles. When we consider them as elements of $\mathbf{P}\omega$ we shall employ the notation:

$$\bot = \varnothing \quad \text{and} \quad \top = \omega$$

The element $\bot$ is the most "undefined" integer, and $\top$ is the most "overdefined". All others are in between.

One last general point on meaning: suppose $x \in \mathbf{P}\omega$ and $k \in x$. Then $k = (n, m)$ for suitable (uniquely determined) integers n and m. That is to say, every element of x can be regarded as an ordered pair; thus, x can be used as a relation. Such an operation as

$$(2.3) \quad x; y = \{(n, l) \mid \exists m.\, (n, m) \in x,\, (m, l) \in y\}$$

is then a continuous function of two variables that treats both x and y as relations. On the other hand we could define a quite different continuous function such as

$$(2.4) \quad x + y = \{n + m \mid n \in x,\, m \in y\}$$

which treats both x and y arithmetically. The only reason we shall probably never write $(x + y); x$ again is that the values of this perfectly well-defined continuous function are, for the most part, quite uninteresting.

There is, however, no theoretical reason why we cannot use the same set with several different "meanings" in the same formula. Of course if we do so, it is to be expected that we will show the point of doing this in the special case. We turn now to the definition of the general language for defining all such functions.

2.3.3 The language LAMBDA ✓

The syntax and semantics of the language LAMBDA are set out in Table 2. The syntax is indicated on the left, and the meanings of the combinations are shown on the right as subsets of $\mathbf{P}\omega$. This is the basic language and could have been given (less understandably) in terms of combinators (see Theorem 2.4). It is, however, a very primitive language, and we shall require many definitions before we can see why such functions as in (2.3) and (2.4) are themselves definable.

TABLE 2

The language LAMBDA

$$0 = \{0\}$$

$$x + 1 = \{n + 1 \mid n \in x\}$$

$$x - 1 = \{n \mid n + 1 \in x\}$$

$$z \supset x, y = \{n \in x \mid 0 \in z\} \cup \{m \in y \mid \exists k.\, k + 1 \in z\}$$

$$u(x) = \{m \mid \exists e_n \subseteq x.\, (n, m) \in u\}$$

$$\lambda x.\, \tau = \{(n, m) \mid m \in \tau[e_n/x]\}$$

The definition has been left somewhat informal in hopes that it will be more understandable. In the above, τ is any term of the language. LAMBDA is type-free and allows any combination to be made by substitution into the given functions. There is one primitive constant (0); there are two unary functions $(x + 1,\ x - 1)$; there is one binary function $(u(x))$ and one ternary function $(z \supset x, y)$; finally there is one variable binding operator $(\lambda x.\, \tau)$. The first three equations have obvious sense. In the fourth, $z \supset x, y$ is McCarthy's conditional expression (a test for zero). Next $u(x)$ defines *application* (u is treated as a graph and x as a set), and $\lambda x.\, \tau$ is *functional abstraction* (compare the definition of **fun**). In defining $\lambda x.\, \tau$, we use $\tau[e_n/x]$ as a shorthand for evaluating the term τ when the variable x is given the value e_n.

Note that the functions are all multiple-valued. Thus we have such a result as:

$$(2.5) \quad (6 \cup 10) + 1 = 7 \cup 11.$$

The partial character of subtraction has expression as:

$$(2.6) \quad 0 - 1 = \bot.$$

We shall see how to define $+$ and $-$ in LAMBDA later. The conditional could also have been defined by cases:

$$z \supset x, y = \begin{cases} \bot & \text{if } z = \bot; \\ x & \text{if } z = 0; \\ y & \text{if } 0 \notin z \neq \bot; \\ x \cup y & \text{if } 0 \in z \neq 0. \end{cases} \tag{2.7}$$

We say that a LAMBDA-term τ defines a function of its free variables (at least). Other results depend on this fundamental proposition:

Formalization (`Language.lean`). Below, each Lean name is the library entry; proofs in the file are short unless noted.

Definition (`Comb`). The inductive type of combinator terms: variables x_n, constants 0, suc, pred, cond, K, S, and binary application.

Definition (`Term`). The inductive type of LAMBDA terms: variables x_n; constant 0; unary successor and predecessor; ternary conditional $\mathrm{cond}(z, x, y)$ for $z \supset x, y$; binary application $\mathrm{app}(u, x)$ for $u(x)$; and abstraction $\mathrm{lam}(i, \tau)$ for $\lambda x_i.\, \tau$.

Definition (`ofNat`). For $n \in \omega$, $\mathrm{ofNat}\, n = \{n\} \subseteq \mathbf{P}\omega$.

Theorem (`mem_ofNat`). For all $n, k \in \omega$, $k \in \mathrm{ofNat}\, n \leftrightarrow k = n$.

Proof. By definition of singleton membership. ■

Definition (`predSet`). For $x \in \mathbf{P}\omega$, $\mathrm{predSet}(x) = \{k \in \omega \mid k + 1 \in x\}$ (Table 2's $x - 1$ on sets).

Definition (`succSet`). For $x \in \mathbf{P}\omega$, $\mathrm{succSet}(x) = \{k \in \omega \mid \exists n \in x.\, k = n + 1\}$ (Table 2's $x + 1$ on sets).

Theorem (`e_one`). The standard dense singleton e_1 satisfies $e_1 = \{0\}$.

Proof. $e_1 = e(2^0) = \{0\}$ by the definition of e. ■

Definition (`envSet`). For an environment $\rho : \omega \to \mathbf{P}\omega$, a variable index i, and a value $v \in \mathbf{P}\omega$, $\mathrm{envSet}\, \rho\, i\, v$ is the environment that agrees with ρ except at i, where it is v (formally, a single-point update $\rho[i \mapsto v]$).

Theorem (`envSet.comm`). If $i \neq j$, then for all ρ, v, w,

$$\mathrm{envSet}(\mathrm{envSet}\, \rho\, i\, v)\, j\, w = \mathrm{envSet}(\mathrm{envSet}\, \rho\, j\, w)\, i\, v.$$

Proof. Extensionality on indices; the two updates commute when $i \neq j$. ■

Definition (`Kcomb`). $\mathrm{Kcomb} = \mathbf{graph}(\lambda x.\, \mathbf{graph}(\lambda y.\, x))$, the graph of the K combinator.

Definition (`zeroC`). $\mathrm{zeroC} = \mathrm{ofNat}\, 0$, the denotation of the constant 0.

Definition (`predC`). $\mathrm{predC} = \mathbf{graph}(\mathrm{predSet})$, the graph of predecessor on sets.

Definition (`sucC`). $\mathrm{sucC} = \mathbf{graph}(\mathrm{succSet})$, the graph of successor on sets.

Definition (`rename`). For distinct variable indices treated as a rename $i \rightsquigarrow j$, $\mathrm{rename}\, i\, j : \mathrm{Term} \to \mathrm{Term}$ replaces free occurrences of variable i by j and leaves other constructors unchanged; on $\mathrm{lam}(k, \tau)$ the subterm τ is renamed only when $k \neq i$ (so bound variables are not captured).

Theorem (`triangle_eq_zero`). If $\mathrm{triangle}(w) = 0$, then $w = 0$.

Proof. For $w = n + 1$, the triangular number $T(n + 1) = (n + 1)(n + 2)/2$ is positive, contradicting $T(w) = 0$. ■

Theorem (`pair_zero_zero`). $\mathrm{pair}(0, 0) = 0$.

Theorem (`pair_one_zero`). $\mathrm{pair}(1, 0) = 1$.

Theorem (`pair_eq_right`). If $\mathrm{pair}(n, m) = m$, then $n = 0$ and $m = 0$.

Proof. From $\mathrm{pair}(n, m) = m$ and the identity $\mathrm{pair}(n, m) = \mathrm{triangle}(n + m) + m$, deduce $\mathrm{triangle}(n + m) = 0$, hence $n + m = 0$ by `triangle_eq_zero`, and therefore $n = m = 0$. ■

Theorem (`eq_2_5`). Scott's equation (2.5):

$$\mathrm{succSet}(\mathrm{ofNat}\,6 \cup \mathrm{ofNat}\,10) = \mathrm{ofNat}\,7 \cup \mathrm{ofNat}\,11.$$

Proof. Extensionality on membership; successor on a singleton $\{n\}$ is $\{n+1\}$, and union distributes over the operation. ■

Theorem (`eq_2_6`). Scott's equation (2.6): $\mathrm{predSet}(\mathrm{ofNat}\,0) = \bot$.

Proof. No k satisfies $k + 1 \in \{0\}$. ■

Lemma (`exists_least_mem`). If $a \subseteq \omega$ is nonempty, there exists $k \in a$ such that k is minimal in a (every $i < k$ satisfies $i \notin a$).

Proof. Strong induction on the witness $n \in a$: either n is already minimal below n, or some smaller element of a yields a minimal element by the induction hypothesis. ■

Lemma (`exists_least_not_mem`). If $a \subseteq \omega$ is not all of ω (equivalently, some $k \notin a$), there exists $k \notin a$ minimal with that property (every $i < k$ satisfies $i \in a$).

Proof. Dual to `exists_least_mem`, using strong induction on a witness $n \notin a$. ■

Theorem (`ofNat.combinatory`). Every numeral $\mathrm{ofNat}\,n$ is combinatory.

Proof. By induction: 0 is the zero combinator; successors apply the successor combinator. ■

Theorem (`ofNat.zero_nonempty`). The numeral 0 is nonempty.

Proof. $0 \in \{0\}$. ■

Theorem (`ofNat.zero_not_pos`). No positive numeral belongs to 0.

Proof. Membership in $\{0\}$ forces equality with 0. ■

Theorem (`topElem.ne_ofNat_zero`). $\top \neq 0$.

Proof. Otherwise $1 \in 0$. ■

`Language.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

inductive Comb where
  | var : ℕ → Comb
  | zero | suc | pred | cond | K | S
  | app : Comb → Comb → Comb

inductive Term where
  | var : ℕ → Term
  | zero : Term
  | succ : Term → Term
  | pred : Term → Term
  | cond : Term → Term → Term → Term
  | app : Term → Term → Term
  | lam : ℕ → Term → Term

def ofNat (n : ℕ) : Pomega := {n}

@[simp] theorem mem_ofNat {n k : ℕ} : k ∈ ofNat n ↔ k = n := by
  simp [ofNat, Set.mem_singleton_iff]
```

```
def predSet (x : Pomega) : Pomega :=
  {k | k + 1 ∈ x}

def succSet (x : Pomega) : Pomega :=
  {k | ∃ n ∈ x, k = n + 1}

theorem e_one : e 1 = ({0} : Pomega) := by
  simpa using e.pow2 0

def envSet (? : ℕ → Pomega) (i : ℕ) (v : Pomega) : ℕ → Pomega :=
  Function.update ? i v
namespace envSet
theorem comm {? : ℕ → Pomega} {i j : ℕ} (hij : i = j) (v w : Pomega) :
    envSet (envSet ? i v) j w = envSet (envSet ? j w) i v := by
  funext k
  unfold envSet
  by_cases hj : k = j
  · subst hj
    simp [Function.update, hij.symm]
  · by_cases hi : k = i
    · subst hi
      simp [Function.update, hij]
    · simp [Function.update, hi, hj]
end envSet

def Kcomb : Pomega := graph (fun x => graph (fun _ => x))

def zeroC : Pomega := ofNat 0

def predC : Pomega := graph predSet

def sucC : Pomega := graph succSet

def rename (i j : ℕ) : Term → Term
  | .var k => if k = i then .var j else .var k
  | .zero => .zero
  | .succ t => .succ (rename i j t)
  | .pred t => .pred (rename i j t)
  | .cond z x y => .cond (rename i j z) (rename i j x) (rename i j y)
  | .app u x => .app (rename i j u) (rename i j x)
  | .lam k body => if k = i then .lam k body else .lam k (rename i j body)

theorem triangle_eq_zero {w : ℕ} (h : triangle w = 0) : w = 0 := by
  match w with
  | 0 => rfl
  | n + 1 =>
    have h1 : 1 ≤ n + 1 := Nat.succ_le_succ (Nat.zero_le _)
    have h2 : 2 ≤ (n + 1) * (n + 2) :=
      calc 2 ≤ 1 * 2 := by decide
           _ ≤ (n + 1) * (n + 2) := Nat.mul_le_mul h1 (Nat.succ_le_succ h1)
    have : 0 < (n + 1) * (n + 2) / 2 := Nat.div_pos h2 (by decide)
    exact (Nat.ne_of_gt this h).elim

theorem pair_zero_zero : pair 0 0 = 0 := by simp [pair]
```

```
theorem pair_one_zero : pair 1 0 = 1 := by simp [pair]

theorem pair_eq_right {n m : ℕ} (h : pair n m = m) : n = 0 ∧ m = 0 := by
  have : triangle (n + m) = 0 := by
    have h' : triangle (n + m) + m = m := by simpa [pair_eq_triangle] using h
    omega
  have : n + m = 0 := triangle_eq_zero this
  omega

theorem eq_2_5 : succSet (ofNat 6 ∪ ofNat 10) = ofNat 7 ∪ ofNat 11 := by
  ext k
  constructor
  · intro ⟨n, hn, hk⟩
    rcases hn with h6 | h10
    · simp [ofNat] at h6; subst h6; simp [ofNat, hk]
    · simp [ofNat] at h10; subst h10; simp [ofNat, hk]
  · intro hk
    rcases hk with h7 | h11
    · simp [ofNat] at h7; exact ⟨6, Or.inl (by simp [ofNat]), by simp [h7]⟩
    · simp [ofNat] at h11; exact ⟨10, Or.inr (by simp [ofNat]), by simp [h11]⟩

theorem eq_2_6 : predSet (ofNat 0) = botElem := by
  ext k
  simp [predSet, ofNat, botElem]

lemma exists_least_mem {a : Pomega} (hex : ∃ k, k ∈ a) :
    ∃ k, k ∈ a ∧ ∀ i < k, i ∈ a := by
  have : ∀ n, n ∈ a → ∃ k ≤ n, k ∈ a ∧ ∀ i < k, i ∈ a := by
    intro n
    induction n using Nat.strong_induction_on with
    | h n ih =>
      intro hn
      rcases Classical.em (∀ i < n, i ∈ a) with hmin | hmin
      · exact ⟨n, le_rfl, hn, hmin⟩
      · obtain ⟨i, hi⟩ := not_forall.mp hmin
        have hi' : i < n := (Classical.not_imp.mp hi).1
        have hia : i ∈ a := not_not.mp (Classical.not_imp.mp hi).2
        obtain ⟨k, hki, hk, hall⟩ := ih i hi' hia
        exact ⟨k, hki.trans hi'.le, hk, hall⟩
  obtain ⟨n, hn⟩ := hex
  obtain ⟨k, _, hk, hall⟩ := this n hn
  exact ⟨k, hk, hall⟩

lemma exists_least_not_mem {a : Pomega} (hex : ∃ k, k ∈ a) :
    ∃ k, k ∈ a ∧ ∀ i < k, i ∈ a := by
  have : ∀ n, n ∈ a → ∃ k ≤ n, k ∈ a ∧ ∀ i < k, i ∈ a := by
    intro n
    induction n using Nat.strong_induction_on with
    | h n ih =>
      intro hn
      rcases Classical.em (∀ i < n, i ∈ a) with hmin | hmin
      · exact ⟨n, le_rfl, hn, hmin⟩
      · obtain ⟨i, hi⟩ := not_forall.mp hmin
        have hi' : i < n := (Classical.not_imp.mp hi).1
        have hia : i ∈ a := (Classical.not_imp.mp hi).2
        obtain ⟨k, hki, hk, hall⟩ := ih i hi' hia
```

```
        exact ⟨k, hki.trans hi'.le, hk, hall⟩
  obtain ⟨n, hn⟩ := hex
  obtain ⟨k, _, hk, hall⟩ := this n hn
  exact ⟨k, hk, hall⟩

end DomainTheory.DataTypesAsLattices
```

ofNat_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import DomainTheory.DataTypesAsLattices.Lambda.Language
public import DomainTheory.DataTypesAsLattices.Lambda.IsCombinatory
public import DomainTheory.DataTypesAsLattices.Lambda.sucC_more
public import DomainTheory.DataTypesAsLattices.Lambda.succSet_more

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace ofNat

theorem combinatory : ∀ n, IsCombinatory (ofNat n)
  | 0 => by
    simpa [zeroC] using IsCombinatory.zero
  | n + 1 => by
    have h := IsCombinatory.app IsCombinatory.suc (combinatory n)
    simpa [sucC.app, succSet.ofNat] using h

theorem zero_nonempty : (ofNat 0).Nonempty :=
  ⟨0, rfl⟩

theorem zero_not_pos : ¬ ∃ n, n + 1 ∈ ofNat 0 := by
  intro ⟨n, hn⟩
  simp [ofNat] at hn

end ofNat

namespace topElem

theorem ne_ofNat_zero : topElem = ofNat 0 := by
  intro h
  have : (1 : ℕ) ∈ ofNat 0 := by rw [← h]; exact Set.mem_univ 1
  simp [ofNat] at this

end topElem

end DomainTheory.DataTypesAsLattices
```

2.3.4 Term avoidance (α) ✓

Table 1 records the basic laws of λ-conversion verified in the $\mathbf{P}\omega$ model. The first is renaming of bound variables:

$$(\alpha) \quad \lambda x.\,\tau = \lambda y.\,\tau[y/x]$$

(in the usual proviso that y is not free in τ).

Proof of Theorem 2.2 (fragment). The verification of (α) is obvious as the 'x' in '$\lambda x.\,\tau$' is a bound variable. (Care should be taken in making the proviso that 'y' is not otherwise free in τ.) The same would of course hold for any other pair of variables. We do not bother very much about alphabetic questions.

In LAMBDA (Table 2), variables are treated informally and substitution $\tau[e_n/x]$ is used in the semantics of $\lambda x.\,\tau$. In the Lean formalization, terms use de Bruijn-style indices x_i (`Term.var i`), and many closed combinator terms in §3 are built by recursion on `Term`. To match Scott's proviso mechanically—no accidental capture of a reserved index—we use a small library predicate **`Term.Avoids`**.

Formalization (`Avoids.lean`). Each Lean name is the library entry.

Definition (`Term.Avoids`). For a variable index $i \in \omega$ and a term τ, τ.`Avoids` i means i does not occur free in τ: - on x_j, require $j \neq i$; - on 0, successor, predecessor, conditional, and application, require the property in each subterm; - on $\lambda x_j.\,\sigma$, require $j = i$ (then i is bound and not free) or σ.`Avoids` i.

This is the inductive "term avoids index i" check used throughout Enumeration and Computability when proving that a synthesized closed term leaves slots such as x_7 or x_8 free for later composition (Gödel codes, combinator algebra, and similar).

`Avoids.lean`

```
module

public import Mathlib.Computability.Halting
public import DomainTheory.DataTypesAsLattices.Lambda.Language

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

open Encodable

open Nat.Partrec (Code)

open Nat.Partrec.Code

def Term.Avoids (i : ℕ) : Term → Prop
  | .var j => j = i
  | .zero => True
  | .succ t => t.Avoids i
  | .pred t => t.Avoids i
  | .cond z x y => z.Avoids i ∧ x.Avoids i ∧ y.Avoids i
  | .app u x => u.Avoids i ∧ x.Avoids i
  | .lam j body => j = i ∨ body.Avoids i

end DomainTheory.DataTypesAsLattices
```

2.3.5 Theorem 2.1 — the continuity theorem ✓

THEOREM 2.1 (The continuity theorem). *All LAMBDA definable functions are continuous.*

Proof of Theorem 2.1. If we did not use the λ-notation, then all LAMBDA-definable functions would be obtained by substitution from the first five (cf. Table 2). Since they are all seen to be continuous, the result would then follow by the substitution theorem (Theorem 1.3). Bringing in λ-abstraction means that we have to combine Theorem 1.3 with this fact:

LEMMA. *If $f(x, y, z, \cdots)$ is a continuous function of all its variables, then $\lambda x.\, f(x, y, z, \cdots)$ is a continuous function of the remaining variables.*

Proof. It is enough to consider one extra variable. We compute from the definition of λ in Table 2 as follows:

$$\lambda x.\, f(x, y) = \{(n, m) \mid m \in f(e_n, y)\}$$

$$= \{(n, m) \mid \exists e_k \subseteq y.\, m \in f(e_n, e_k)\}$$

$$= \bigcup \{\{(n, m) \mid m \in f(e_n, e_k)\} \mid e_k \subseteq y\}$$

$$= \bigcup \{\lambda x.\, f(x, e_k) \mid e_k \subseteq y\}.$$

Thus $\lambda x.\, f(x, y)$ is continuous in y.

theorem_2_1.lean

```
module

public import DomainTheory.DataTypesAsLattices.Lambda.interp
import Mathlib.Tactic.Bound.Init
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_2_1 (t : Term) (? : ℕ → Pomega) (i : ℕ) :
    IsScottContinuous (fun v => interp t (envSet ? i v)) :=
  interp.var_isScottContinuous t ? i

end DomainTheory.DataTypesAsLattices
```

2.3.6 Theorem 2.2 — the conversion theorem ✓

Once that is proved, we can use Theorem 1.2 to establish:

THEOREM 2.2 (The conversion theorem). *The three basic principles (α), (β), (ξ) of λ-conversion are all valid in the model.*

Proof of Theorem 2.2. The reason behind this result is the restriction to continuous functions. Theorem 2.1 shows that we cannot violate the restriction by giving definitions in LAMBDA, and the graph theorem (Theorem 1.2) shows that continuous functions correspond perfectly with their graphs.

The verification of (α) of Table 1 is obvious as the 'x' in '$\lambda x.\, \tau$' is a bound variable. (Care should be taken in making the proviso that 'y' is not otherwise free in τ.) The same would of course hold for any other pair of variables. We do not bother very much about alphabetic questions.

The verification of (β) is just a restatement of Theorem 1.2(i). Let τ define a function f (of x). Then by definition $f(x) = \tau$ and $\lambda x.\, \tau = \mathbf{graph}(f)$. Also $\mathbf{fun}(u)(x)$ in the notation of Theorem 1.2 is the same as

the binary operation $u(x)$ in the notation of LAMBDA. Thus in Theorem 1.2(i) if we apply both sides to y we get nothing else than (β).

Half of property (ξ) is already implied by (β): the implication from left to right. (Just apply both sides to x.) In the other direction, $\forall x.\, \tau = \sigma$ means that τ and σ define the *same* function of x; thus, the two graphs must be equal.

Remarks on other laws. The failure of (η) simply means that not every set in $\mathbf{P}\omega$ is the graph of a function. Condition (iii) of Theorem 1.2 is equivalent to saying that $u = \lambda x.\, u(x)$, in other words, u is the graph of some function if and only if it is the graph of the function determined by u.

Law (μ) is the monotone property of application (in both variables); therefore, (μ) and (ξ) together imply (ξ^*) from left to right. Suppose that $\forall x.\, \tau \subseteq \sigma$; then clearly:

$$\{(n, m) \mid m \in \tau[e_n/x]\} \subseteq \{(n, m) \mid m \in \sigma[e_n/x]\},$$

which gives (ξ^*) from right to left.

There are, by the way, other laws valid in the model, as explained in the later results.

theorem_2_2.lean

```
module

public import DomainTheory.DataTypesAsLattices.Graph.beta

public import DomainTheory.DataTypesAsLattices.Lambda.theorem_2_1

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_2_2

theorem alpha (i j : ℕ) (body : Term) (? : ℕ → Pomega)
    (h : ∀ v, interp body (envSet ? i v) =
            interp (rename i j body) (envSet ? j v)) :
    interp (.lam i body) ? = interp (.lam j (rename i j body)) ? := by
  unfold interp
  exact congrArg graph (funext h)

theorem xi {i : ℕ} {τ σ : Term} {? : ℕ → Pomega}
    (h : ∀ v, interp τ (envSet ? i v) = interp σ (envSet ? i v)) :
    interp (.lam i τ) ? = interp (.lam i σ) ? := by
  simp [interp, h]

theorem beta (i : ℕ) (body : Term) (? : ℕ → Pomega) (y : Pomega) :
    funOf (interp (.lam i body) ?) y = interp body (envSet ? i y) :=
  DomainTheory.DataTypesAsLattices.beta (theorem_2_1 body ? i) y

end theorem_2_2

theorem theorem_2_2 (i : ℕ) (body : Term) (? : ℕ → Pomega) (y : Pomega) :
    (∀ j, (∀ v, interp body (envSet ? i v) =
            interp (rename i j body) (envSet ? j v)) →
        interp (.lam i body) ? = interp (.lam j (rename i j body)) ?) ∧
      funOf (interp (.lam i body) ?) y = interp body (envSet ? i y) ∧
        ∀ σ, (∀ v, interp body (envSet ? i v) = interp σ (envSet ? i v)) →
```

```
          interp (.lam i body) ? = interp (.lam i σ) ? :=
  ⟨fun j h => theorem_2_2.alpha i j body ? h,
    theorem_2_2.beta i body ? y,
    fun _σ h => theorem_2_2.xi h⟩

end DomainTheory.DataTypesAsLattices
```

2.3.7 Theorem 2.3 — the reduction theorem ✓

By "model" here we of course understand the interpretation of the language where the semantics gives terms denotations in $\mathbf{P}\omega$ according to the stated definition. Through this interpretation, more properly speaking, $\mathbf{P}\omega$ becomes a model for the axioms (α), (β), (ξ). Two well-known results of the calculus of λ-conversion allow the reduction of functions of several variables to those of *one*, and the reduction of all the primitives to *combinators* (constants)—all this with the aid of the binary operation of application.

THEOREM 2.3 (The reduction theorem). *Any continuous function of k-variables can be written as*

$$f(x_0, x_1, \cdots, x_{k-1}) = u(x_0)(x_1)\cdots(x_{k-1}),$$

where u is a suitably chosen element of $\mathbf{P}\omega$.

Proof of Theorem 2.3. This is a standard result in combinatory logic. We have only to put:

$$u = \lambda x_0 \lambda x_1 \cdots \lambda x_{n-1}.\, f(x_0, x_1, \cdots, x_{n-1}).$$

That is, we use the iteration of the process of forming the graph of a continuous function. As each step (from the inside out) keeps everything continuous, we are sure that the equation of Theorem 2.3 will hold for iterated application.

theorem_2_3.lean

```
module

public import DomainTheory.DataTypesAsLattices.Lambda.curryFin
public import DomainTheory.DataTypesAsLattices.Lambda.curry2
public import DomainTheory.DataTypesAsLattices.Lambda.curry3
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_2_3

theorem unary {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    ∃ u, ∀ x, funOf u x = f x :=
  ⟨graph f, fun x => by rw [theorem_1_2.i hf]⟩

theorem binary {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y)) :
    ∃ u, ∀ x y, funOf (funOf u x) y = f x y :=
  ⟨curry2 f hfx hfy, curry2.app f hfx hfy⟩

theorem ternary {f : Pomega → Pomega → Pomega → Pomega}
    (hf0 : ∀ y z, IsScottContinuous (fun x => f x y z))
```

```
    (hf1 : ∀ x z, IsScottContinuous (fun y => f x y z))
    (hf2 : ∀ x y, IsScottContinuous (fun z => f x y z)) :
    ∃ u, ∀ x y z, funOf (funOf (funOf u x) y) z = f x y z :=
  ⟨curry3 f hf0 hf1 hf2, curry3.app f hf0 hf1 hf2⟩

end theorem_2_3

theorem theorem_2_3 {n : ℕ} {f : (Fin n → Pomega) → Pomega}
    (hf : ScottContinuousFin f) :
    ∃ u, ∀ xs, nestApplyFin u xs = f xs :=
  ⟨curryFin f, curryFin.app hf⟩

end DomainTheory.DataTypesAsLattices
```

2.3.8 Theorem 2.4 — the combinator theorem ✓

THEOREM 2.4 (The combinator theorem). *The LAMBDA-definable func-*
... tions can be generated (*from variables*) by iterated application with the aid of these six constants:

$$\mathbf{0} = 0$$

$$\mathbf{suc} = \lambda x.\, x + 1$$

$$\mathbf{pred} = \lambda x.\, x - 1$$

$$\mathbf{cond} = \lambda x \lambda y \lambda z.\, z \supset x, y$$

$$\mathbf{K} = \lambda x \lambda y.\, x$$

$$\mathbf{S} = \lambda u \lambda v \lambda x.\, u(x)(v(x))$$

Proof of Theorem 2.4. This can be found in almost any reference on combinatory logic or λ-conversion. The main idea is to eliminate the λ in favor of the combinators. The fact that we have a few other kinds of terms causes no problem if we introduce the corresponding combinators. The method of proof is to show, for any LAMBDA-term τ with free variables among $x_0, x_1, \ldots, x_{n-1}$, that there is a combination γ of combinators such that:

$$\tau = \gamma(x_0)(x_1) \cdots (x_{k-1}).$$

This can be done by induction on the complexity of τ.

theorem_2_4.lean

```
module

public import DomainTheory.DataTypesAsLattices.Lambda.erase

@[expose] public section
```

```
namespace DomainTheory.DataTypesAsLattices

namespace theorem_2_4

theorem complete (t : Term) (? : ℕ → Pomega) :
    interp t ? = ofComb (erase t) ? :=
  (erase.correct t ?).symm

theorem closed (t : Term) :
    IsCombinatory (interp t (fun _ => botElem)) := by
  rw [theorem_2_4.complete]
  refine ofComb.combinatory _ _ fun _ => ?_
  have hbot : funOf predC zeroC = botElem := by
    rw [predC.app]; exact eq_2_6
  exact hbot ▸ IsCombinatory.app IsCombinatory.pred IsCombinatory.zero

end theorem_2_4

theorem theorem_2_4 : IsCombinatory zeroC ∧ IsCombinatory sucC ∧ IsCombinatory predC ∧
    IsCombinatory condC ∧ IsCombinatory Kcomb ∧ IsCombinatory Scomb :=
  ⟨.zero, .suc, .pred, .cond, .K, .S⟩

end DomainTheory.DataTypesAsLattices
```

2.3.9 The combinator Y ✓

But the result that makes all this model building and combinatory logic mathematically interesting concerns the so-called *paradoxical combinator* defined by the equation:

$$\mathbf{Y} = \lambda u.\,(\lambda x.\,u(x(x)))(\lambda x.\,u(x(x))). \tag{2.8}$$

Language, model, and bridge. Equation (2.8) is stated in **LAMBDA** (syntax: `Term`, interpretation `interp`). The **model** is $\mathbf{P}\omega$ with application `funOf` and graphs `graph`. We separate three roles in `Ycomb.lean`:

- **Language:** `Yterm` is the closed LAMBDA term for (2.8), using variables x_0, x_1 for the binders in Scott's λu and λx.
- **Model:** `Ycomb` is the element of $\mathbf{P}\omega$ obtained by turning (2.8) into a graph: for each u, apply the ω-subcombinator $\omega(u) = \lambda x.\,u(x(x))$ to itself (formalized as `omegaComb`).
- **Bridge:** `Yterm.interp` shows that under the constant environment $\rho \equiv \lambda i.\,\bot$, we have $\mathrm{interp}(\texttt{Yterm})\,\rho = \texttt{Ycomb}$—the syntax of (2.8) denotes the model element.

The lemmas in `namespace Ycomb` are **model** facts about `funOf Ycomb`; `Ycomb.combinatory` links back to **language** via Theorem 2.4 and the bridge.

Formalization (`Ycomb.lean`). Each Lean name is the library entry; proofs in the file are short unless noted.

Definition (`omegaComb`, in `omegaComb.lean`). For $u \in \mathbf{P}\omega$, $\omega(u) = \mathbf{graph}(\lambda x.\,u(x(x)))$, so $\mathrm{funOf}(\omega(u))\,x = \mathrm{funOf}\,u\,(\mathrm{funOf}\,x\,x)$ (`omegaComb.app`).

Definition (`Ycomb`, model). `Ycomb` $=$ $\mathbf{graph}(\lambda u.\,\mathrm{funOf}(\omega(u))(\omega(u)))$—the graph of $u \mapsto (\lambda x.\,u(x(x)))(\lambda x.\,u(x(x)))$ in the model.

Definition (`Yterm`, language). `Yterm` is the `Term` for (2.8): $\lambda x_0.\,(\lambda x_1.\,x_0(x_1(x_1)))(\lambda x_1.\,x_0(x_1(x_1)))$.

Theorem (`Yterm.interp`, bridge). For $\rho(i) = \bot$ for all i,

$$\mathrm{interp}(\texttt{Yterm})\,\rho = \texttt{Ycomb}.$$

Proof. Unfold `interp`, `Yterm`, `Ycomb`, and `omegaComb`; simplify updates in `envSet`. ■

Theorem (`Ycomb.app`, model). For all $u \in \mathbf{P}\omega$,

$$\mathrm{funOf}(\texttt{Ycomb})\,u = \mathrm{funOf}(\omega(u))(\omega(u)).$$

Proof. Unfold `Ycomb` as a graph and apply (β) (`beta`), using Theorem 1.3 to justify continuity of the underlying map (`theorem_1_3`, `diagApp_isScottContinuous`, `omegaComb.isScottContinuous`). ■

Theorem (`Ycomb.combinatory`, model / language). `IsCombinatory Ycomb`.

Proof. By Theorem 2.4, every closed term's interpretation is combinatory (`theorem_2_4.closed` applied to `Yterm`). Rewrite with `Yterm.interp`. ■

Theorem (`Ycomb.unfold`, model). For all $u \in \mathbf{P}\omega$,

$$\mathrm{funOf}(\texttt{Ycomb})\,u = \mathrm{funOf}\,u\,(\mathrm{funOf}(\texttt{Ycomb})\,u).$$

Proof. Chain `Ycomb.app`, the defining equation for $\omega(u)$ at $x = \omega(u)$ (`omegaComb.app`), and `Ycomb.app` again. This is the graph-model form of the usual Y fixed-point law; Theorem 2.5 treats the case when u is itself a graph. ■

`Ycomb.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Lambda.omegaComb
public import DomainTheory.DataTypesAsLattices.Lambda.theorem_2_4

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def Ycomb : Pomega :=
  graph (fun u => funOf (omegaComb u) (omegaComb u))

def Yterm : Term :=
  .lam 0 (.app
    (.lam 1 (.app (.var 0) (.app (.var 1) (.var 1))))
    (.lam 1 (.app (.var 0) (.app (.var 1) (.var 1)))))

namespace Yterm

theorem interp :
    _root_.DomainTheory.DataTypesAsLattices.interp Yterm (fun _ => botElem) =
      Ycomb := by
  simp [Yterm, _root_.DomainTheory.DataTypesAsLattices.interp, Ycomb, omegaComb,
    envSet, Function.update]
```

```
end Yterm

namespace Ycomb

theorem app (u : Pomega) :
    funOf Ycomb u = funOf (omegaComb u) (omegaComb u) :=
  beta (theorem_1_3 diagApp_isScottContinuous omegaComb.isScottContinuous) u

theorem combinatory : IsCombinatory Ycomb := by
  simpa [Yterm.interp] using theorem_2_4.closed Yterm

theorem unfold (u : Pomega) :
    funOf Ycomb u = funOf u (funOf Ycomb u) := by
  calc
    funOf Ycomb u = funOf (omegaComb u) (omegaComb u) := Ycomb.app u
    _ = funOf u (funOf (omegaComb u) (omegaComb u)) :=
      omegaComb.app u (omegaComb u)
    _ = funOf u (funOf Ycomb u) := by rw [Ycomb.app]

end Ycomb

end DomainTheory.DataTypesAsLattices
```

2.3.10 Theorem 2.5 — the first recursion theorem ✓

THEOREM 2.5 (The first recursion theorem). *If u is the graph of a continuous function f, then $\mathbf{Y}(u) = \mathbf{fix}(f)$, the least fixed point of f.*

There are two points to note here: the fixed point is LAMBDA-definable if f is; and $\mathbf{Y}$ defines a continuous operator. The word "recursion" is attached to the theorem because fixed points are employed to solve recursion equations. It would not be correct to call the fixed-point theorem (Theorem 1.4) the recursion theorem since it only shows that fixed points exist and not how they are definable in a language. The *second* recursion theorem (in Kleene's terminology) is related, but it involves Gödel numbers as introduced in § 3.

Proof of Theorem 2.5. The well-known calculation shows that we have from (2.8):

$$\mathbf{Y}(u) = (\lambda x.\, u(x(x)))(\lambda x.\, u(x(x))) = u(\mathbf{Y}(u)).$$

Thus $\mathbf{Y}(u)$ is a fixed point of the function $u(x)$. What is needed is the proof to show that it is the least one.

Let $d = \lambda x.\, u(x(x))$ and let a be any other fixed point of $u(x)$. To show, as we must, that $d(d) \subseteq a$, it is enough to show that $e_l \subseteq d$ always implies $e_l(e_l) \subseteq a$; because by continuity we have:

$$d(d) = \bigcup\{e_l(e_l) \mid e_l \subseteq d\}.$$

By way of induction, suppose that this implication holds for all $n < l$. Assume that $e_l \subseteq d$ and that $m \in e_l(e_l)$. We will want to use the induction hypothesis to show that $m \in a$. By the definition of application, there exists an integer n such that $(n, m) \in e_l$ and $e_n \subseteq e_l$. But $n \leq (n, m) < l$, and $e_n \subseteq d$. By the hypothesis, we have $e_n(e_n) \subseteq a$. Note that $(n, m) \in d$ also, and that d is defined by λ-abstraction; thus,

$m \in d(e_n)$ by definition. By monotonicity $u(e_n(e_n)) \subseteq u(a) = a$; therefore $m \in a$. This shows that $e_l(e_l) \subseteq a$, and the inductive proof is complete.

Remark. Note that we did not actually use the fixed-point theorem in the proof, but we did use rather special properties of the pairing (n, m) and the finite sets e_l.

theorem_2_5.lean

```
module

public import DomainTheory.DataTypesAsLattices.Lambda.Ycomb
public import DomainTheory.DataTypesAsLattices.Lambda.omega_first_recursion

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_2_5 {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    funOf Ycomb (graph f) = fix f := by
  rw [Ycomb.app]
  exact omega_first_recursion hf

end DomainTheory.DataTypesAsLattices
```

2.3.11 The graph model ✓

From this point on we see no need to distinguish continuous functions from elements of $\mathbf{P}\omega$; a continuous function will be *identified* with its graph. Note that u is a graph iff $u = \lambda x.\, u(x)$, which is equivalent to Theorem 1.2 (iii). For this reason (functions are graphs) we propose the name *Graph Model* for this model of the λ-calculus. (There is more to LAMBDA than just λ, however.)

The identification of functions with graphs entails that the function space of all continuous functions from $\mathbf{P}\omega$ into $\mathbf{P}\omega$ is to be identified (one-to-one) with the subspace

$$\mathbf{FUN} = \{u \mid u = \lambda x.\, u(x)\} \subseteq \mathbf{P}\omega.$$

The identification is *topological* in that the subspace topology agree with the product topology on the function space. This is the topology of pointwise convergence and is closely connected with the lattice structure on the function space which is also defined pointwise (that is, argumentwise). In the notation of λ-abstraction we can express this as the extension of the axiom of extensionality called (ξ^*) in Table 1 of the Introduction. The laws in Table 1 are not the only ones valid in the model, however. We may also note such argumentwise distribution

laws as:

$$(2.9) \quad (f \cup g)(x) = f(x) \cup g(x);$$

$$(2.10) \quad (\lambda x.\, \tau) \cup (\lambda x.\, \sigma) = \lambda x.\, (\tau \cup \sigma);$$

$$(2.11) \quad (f \cap g)(x) = f(x) \cap g(x);$$

$$(2.12) \quad (\lambda x.\, \tau) \cap (\lambda x.\, \sigma) = \lambda x.\, (\tau \cap \sigma).$$

In the above f and g must be graphs. It is also true that if $\mathcal{F} \subseteq \mathbf{P}\omega$, then

$$\bigcup\{f \mid f \in \mathcal{F}\}(x) = \bigcup\{f(x) \mid f \in \mathcal{F}\}, \tag{2.13}$$

but the same does not hold for $\cap$.

Formalization (`graph_model.lean`). Scott's (2.9)–(2.11) are stated for graphs f, g and application; in Lean we use `graph` for functional abstraction and prove the union/intersection laws (2.10) and (2.12) in that form, together with (ξ^*) as `xi_star`. Each name below is the library entry; proofs in the file are short unless noted.

Definition (`graph`). For $F : \mathbf{P}\omega \to \mathbf{P}\omega$, $\mathbf{graph}(F) = \{(n, m) \mid m \in F(e_n)\}$ (pairs coded as `pair n m`).

Theorem (`xi_star`, Table 1 (ξ^*)). If $\tau, \sigma : \mathbf{P}\omega \to \mathbf{P}\omega$ and $\forall x.\, \tau(x) \subseteq \sigma(x)$, then $\mathbf{graph}(\tau) \subseteq \mathbf{graph}(\sigma)$.

Proof. If $(n, m) \in \mathbf{graph}(\tau)$, then $m \in \tau(e_n)$; by hypothesis $m \in \sigma(e_n)$, so $(n, m) \in \mathbf{graph}(\sigma)$. ■

Theorem (`eq_2_10`, equation (2.10)). For all $\tau, \sigma : \mathbf{P}\omega \to \mathbf{P}\omega$,

$$\mathbf{graph}(\tau) \cup \mathbf{graph}(\sigma) = \mathbf{graph}(\lambda x.\, \tau(x) \cup \sigma(x)).$$

Proof. Extensionality on pairs: membership in the left union splits according to membership in $\mathbf{graph}(\tau)$ or $\mathbf{graph}(\sigma)$; on the right, $m \in \tau(x) \cup \sigma(x)$ iff $m \in \tau(x)$ or $m \in \sigma(x)$. ■

Theorem (`eq_2_12`, equation (2.12)). For all $\tau, \sigma : \mathbf{P}\omega \to \mathbf{P}\omega$,

$$\mathbf{graph}(\tau) \cap \mathbf{graph}(\sigma) = \mathbf{graph}(\lambda x.\, \tau(x) \cap \sigma(x)).$$

Proof. If (n, m) lies in both graphs, the argument codes n, m must agree (`pair_inj`); then $m \in \tau(e_n) \cap \sigma(e_n)$. Conversely, if m lies in both value sets at the same e_n, the pair belongs to both graphs. ■

(Equations (2.9) and (2.11) are the same distribution for application and values; (2.13) is not in this file.)

`graph_model.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.eDense

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem xi_star {τ σ : Pomega → Pomega} (h : ∀ x, τ x ⊆ σ x) :
    graph τ ⊆ graph σ := by
  intro p hp
  rcases hp with ⟨n, m, rfl, hm⟩
  exact ⟨n, m, rfl, h _ hm⟩

theorem eq_2_10 (τ σ : Pomega → Pomega) :
    graph τ ∪ graph σ = graph (fun x => τ x ∪ σ x) := by
  ext p
  constructor
  · intro hp
```

```
    rcases hp with h | h
    · rcases h with ⟨n, m, hp, hm⟩
      exact ⟨n, m, hp, Or.inl hm⟩
    · rcases h with ⟨n, m, hp, hm⟩
      exact ⟨n, m, hp, Or.inr hm⟩
  · intro h
    rcases h with ⟨n, m, hp, hm⟩
    rcases hm with hm | hm
    · exact Or.inl ⟨n, m, hp, hm⟩
    · exact Or.inr ⟨n, m, hp, hm⟩

theorem eq_2_12 (τ σ : Pomega → Pomega) :
    graph τ ∩ graph σ = graph (fun x => τ x ∩ σ x) := by
  ext p
  constructor
  · intro ⟨hτ, hσ⟩
    rcases hτ with ⟨n, m, hpτ, hmτ⟩
    rcases hσ with ⟨n', m', hpσ, hmσ⟩
    have hp' : pair n m = pair n' m' := hpτ.symm.trans hpσ
    obtain ⟨rfl, rfl⟩ := pair_inj hp'
    exact ⟨n, m, hpτ, hmτ, hmσ⟩
  · intro h
    rcases h with ⟨n, m, hp, hmτ, hmσ⟩
    exact ⟨⟨n, m, hp, hmτ⟩, ⟨n, m, hp, hmσ⟩⟩

end DomainTheory.DataTypesAsLattices
```

2.3.12 Sequences ✓

Next we use the notation $\langle x_0, x_1, \ldots, x_{n-1}\rangle$ for the function $\hat{p}$ where $p : \omega \to \mathbf{P}\omega$ is defined by:

$$p(i) = \begin{cases} x_i & \text{if } i < n; \\ \bot & \text{if } i \geq n. \end{cases}$$

$$\langle\rangle = \bot \tag{2.19}$$

$$\langle x\rangle = \lambda z.\, z \supset x, \bot \tag{2.20}$$

$$\langle x, y\rangle = \lambda z.\, z \supset x, (z - 1 \supset y, \bot) \tag{2.21}$$

$$\langle x_0, x_1, \ldots, x_n\rangle = \lambda z.\, z \supset x_0, \langle x_1, \ldots, x_n\rangle(z - 1). \tag{2.22}$$

Obviously we should formalize the subscript notation so that $u_x = u(x)$; then we find:

$$\langle x_0, x_1, \ldots, x_n\rangle_i = \begin{cases} x_i & \text{if } i < n; \\ \bot & \text{if } i \geq n. \end{cases} \tag{2.23}$$

Formalization (`sequences.lean`). *Finite* tuples $\langle x_0, \ldots, x_{n-1}\rangle$ are graphs built from McCarthy conditional (`condSet`) and predecessor on arguments; *infinite* sequences are the spread $\lambda x.\, \bigcup\{u(i) \mid i \in$

$x\}$, approximated by bounded unions `seqFunLt` and defined recursively via `seqShift`. Lean names below are the library entries.

Definition (`seqCons`). $\texttt{seqCons}(x, xs) = \mathbf{graph}(\lambda z.\, z \supset x,\ xs(\mathit{pred}\, z))$ — the graph of (2.22): head x, tail read from xs off $z - 1$.

Theorem (`seqCons.body`). The body $z \mapsto \mathit{condSet}(z, x, xs(\mathit{pred}\, z))$ is Scott-continuous.

Proof. `theorem_1_3.tuple` from continuity of conditional, identity, `funOf xs`, and `predSet`. ■

Definition (`seq2`). $\texttt{seq2}(x, y) = \mathbf{graph}(\lambda z.\, z \supset x,\ (\mathit{pred}\, z \supset y,\ \bot))$ — model form of (2.21) for a pair.

Theorem (`seq2.app`). $\mathrm{funOf}(\texttt{seq2}\, x\, y)\, z = z \supset x,\ (\mathit{pred}\, z \supset y,\ \bot)$.

Proof. (β) via `seq2.body_isScottContinuous`. ■

Theorem (`eq_2_22`). Same as `seq2.app` for general `seqCons`: $\mathrm{funOf}(\texttt{seqCons}\, x\, xs)\, z = z \supset x,\ \mathrm{funOf}\, xs\, (\mathit{predSet}\, z)$.

Proof. `seqCons.body` and (β). ■

Theorem (`eq_2_23_zero`, `seq2.zero`). $\mathrm{funOf}(\texttt{seq2}\, x\, y)\, 0 = x$ (argument $0 = \mathrm{ofNat}\, 0$).

Proof. Unfold `seq2.app`; case split on conditional and predecessor. ■

Theorem (`eq_2_23_one`, `seq2.one`). $\mathrm{funOf}(\texttt{seq2}\, x\, y)\, 1 = y$.

Proof. Same. ■

Theorem (`eq_2_23_ge`). For all n, $\mathrm{funOf}(\texttt{seq2}\, x\, y)\, (n + 2) = \bot$ (empty beyond the pair).

Proof. `seq2.app` and arithmetic on `predSet` / `ofNat`. ■

Theorem (`seq2.tag_ne`). $\texttt{seq2}(\mathrm{ofNat}\, 0, x) \neq \texttt{seq2}(\mathrm{ofNat}\, 1, y)$ (tags 0 and 1 are distinguishable).

Proof. Apply both sides to argument 0; membership in 0 vs 1 contradicts. ■

Definition (`seqFun`). $\texttt{seqFun}(u, x) = \bigcup\{\mathrm{funOf}\, u\, (\mathrm{ofNat}\, i) \mid i \in x\}$ — the spread in (2.23) without λ-notation.

Definition (`seqFunLt`). $\texttt{seqFunLt}(u, x, n) = \bigcup\{\mathrm{funOf}\, u\, (\mathrm{ofNat}\, i) \mid i \in x,\ i < n\}$ — the same union restricted to indices $< n$.

Theorem (`mem_seqFunLt`). $k \in \texttt{seqFunLt}\, u\, x\, n \leftrightarrow \exists i \in x,\ i < n \wedge k \in \mathrm{funOf}\, u\, (\mathrm{ofNat}\, i)$.

Proof. Unfold `seqFunLt` as a double indexed union. ■

Theorem (`seqFun.eq_iUnion_lt`). $\texttt{seqFun}(u, z) = \bigcup_n \texttt{seqFunLt}(u, z, n)$.

Proof. Extensionality; each index i contributes at stage $i + 1$. ■

Theorem (`seqFun.left_isScottContinuous`, `seqFun.right_isScottContinuous`). $u \mapsto \texttt{seqFun}(u, x)$ and $x \mapsto \texttt{seqFun}(u, x)$ are Scott-continuous.

Proof. Directed unions of Scott-continuous applications (`scottUnion`, `mem_scottUnion`, `funOf.isScottContinuous`). ■

Definition (`seqShift`). $\texttt{seqShift}(u) = \mathbf{graph}(\lambda z.\, \texttt{seqFun}(u, \mathit{succSet}\, z))$ — reindex tail by successor on arguments (shift u_i to u_{i+1}).

Theorem (`seqShift.app`, `seqShift.ofNat`). $\mathrm{funOf}(\texttt{seqShift}\, u)\, z = \texttt{seqFun}(u, \mathit{succSet}\, z)$; at numeric i, $\mathrm{funOf}(\texttt{seqShift}\, u)\, (\mathrm{ofNat}\, i) = \mathrm{funOf}\, u\, (\mathrm{ofNat}(i + 1))$.

Proof. Graph (β) and unfold `seqFun` / `succSet`. ■

Definition (`termShift`). $\texttt{termShift}(u) = \mathbf{graph}(\lambda t.\, \mathrm{funOf}\, u\, (\mathit{succSet}\, t))$ — the same index shift on arbitrary arguments (for LAMBDA terms later).

Theorem (`termShift.app`, `termShift.ofNat`). As for `seqShift`, with `funOf` in place of `seqFun`.

Proof. `theorem_1_3` and (β). ■

Theorem (`seqFunLt.zero`). $\texttt{seqFunLt}\, u\, z\, 0 = \bot$.

Proof. No index $i < 0$. ■

Theorem (`seqFunLt.succ`).

$$z \supset \mathrm{funOf}\, u\, 0,\ \texttt{seqFunLt}(\texttt{seqShift}\, u, \mathit{predSet}\, z, n) = \texttt{seqFunLt}\, u\, z\, (n+1).$$

This is the recursive step Scott uses because $\cup$ is not primitive in LAMBDA.

Proof. Case split on McCarthy conditional; use `seqShift.ofNat` to align indices. ■

Theorem (`seqFunLt.term`). Same identity with `termShift` in place of `seqShift` (term-level shift for definability proofs).

Proof. Parallel to `seqFunLt.succ`. ■

(Equations (2.19)–(2.20) for empty and singleton tuples are $\bot$ and `seqCons`-special cases; the dollar combinator and full LAMBDA term for `seqFun` continue in later notes.)

`sequences.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Graph.beta
public import DomainTheory.DataTypesAsLattices.Graph.funOf_more
public import DomainTheory.DataTypesAsLattices.Lambda.IsCombinatory
public import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_3
public import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
public import DomainTheory.DataTypesAsLattices.Lambda.id_isScottContinuous
public import DomainTheory.DataTypesAsLattices.Lambda.graph_const_isScottContinuous
public import DomainTheory.DataTypesAsLattices.Lambda.predSet_more
public import DomainTheory.DataTypesAsLattices.Lambda.succSet_more
public import Mathlib.Topology.Separation.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def seqFun (u x : Pomega) : Pomega :=
  ⋃ i ∈ x, funOf u (ofNat i)

def seqFunLt (u x : Pomega) (n : ℕ) : Pomega :=
  ⋃ i ∈ x, ⋃ _ : i < n, funOf u (ofNat i)

theorem mem_seqFunLt {u x : Pomega} {n k : ℕ} :
    k ∈ seqFunLt u x n ↔ ∃ i ∈ x, i < n ∧ k ∈ funOf u (ofNat i) := by
  constructor
  · intro hk
    obtain ⟨i, hi, hrest⟩ := Set.mem_iUnion₂.mp hk
    obtain ⟨hlt, hki⟩ := Set.mem_iUnion.mp hrest
    exact ⟨i, hi, hlt, hki⟩
  · intro ⟨i, hi, hlt, hki⟩
    exact Set.mem_iUnion₂.mpr ⟨i, hi, Set.mem_iUnion.mpr ⟨hlt, hki⟩⟩

def seqCons (x xs : Pomega) : Pomega :=
  graph (fun z => condSet z x (funOf xs (predSet z)))

namespace seqCons

theorem body (x xs : Pomega) :
    IsScottContinuous (fun z => condSet z x (funOf xs (predSet z))) :=
```

```
  theorem_1_3.tuple
    (fun _ => condSet.isScottContinuous_left x _)
    (fun z => condSet.isScottContinuous_right z x)
    id_isScottContinuous
    (theorem_1_3 (funOf.isScottContinuous xs) predSet.isScottContinuous)

end seqCons

def seq2 (x y : Pomega) : Pomega :=
  graph (fun z => condSet z x (condSet (predSet z) y botElem))

namespace seq2

theorem body_isScottContinuous (x y : Pomega) :
    IsScottContinuous (fun z => condSet z x (condSet (predSet z) y botElem)) := by
  constructor
  intro z
  have H := theorem_1_3.diag (x := z)
    (f := fun z w => condSet z x (condSet (predSet w) y botElem))
    (fun _w => condSet.isScottContinuous_left x _)
    (fun _z =>
      theorem_1_3 (condSet.isScottContinuous_right _z x)
        (theorem_1_3 (condSet.isScottContinuous_left y botElem)
          predSet.isScottContinuous))
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ z ∧
        k ∈ condSet (e n) x (condSet (predSet (e n)) y botElem)} := by
      rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ z ∧
        k ∈ condSet (e n) x (condSet (predSet (e n)) y botElem)} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

theorem app (x y z : Pomega) :
    funOf (seq2 x y) z = condSet z x (condSet (predSet z) y botElem) :=
  beta (seq2.body_isScottContinuous x y) z

theorem one (x y : Pomega) : funOf (seq2 x y) (ofNat 1) = y := by
  rw [app]
  ext n
  simp [condSet, predSet, ofNat, botElem]

theorem zero (x y : Pomega) : funOf (seq2 x y) (ofNat 0) = x := by
  rw [app]
  ext n
  simp [condSet, predSet, ofNat, botElem]

theorem tag_ne (x y : Pomega) :
    seq2 (ofNat 0) x = seq2 (ofNat 1) y := by
  intro h
```

```
  have hfun := congrArg (fun w => funOf w (ofNat 0)) h
  have hx : (0 : ℕ) ∈ funOf (seq2 (ofNat 0) x) (ofNat 0) :=
    ⟨1, fun k hk =>
      match k, hk with
      | 0, _ => rfl
      | k + 1, hk =>
        False.elim (Bool.false_ne_true
          (((Nat.testBit_succ 1 k).trans (Nat.zero_testBit k)).symm.trans hk)),
      ⟨1, 0, rfl, Or.inl ⟨rfl, rfl⟩⟩⟩
  have hy : (0 : ℕ) ∈ funOf (seq2 (ofNat 1) y) (ofNat 0) := by
    intro ⟨k, hk, hp⟩
    rcases hp with ⟨k', m, heq, hm⟩
    obtain ⟨rfl, rfl⟩ := pair_inj heq
    rcases hm with ⟨h1, _⟩ | ⟨_, ⟨t, ht⟩⟩
    · exact Nat.zero_ne_one h1
    · exact Nat.succ_ne_zero t (hk ht)
  exact hy (hfun ▸ hx)

end seq2

theorem eq_2_22 (x xs z : Pomega) :
    funOf (seqCons x xs) z = condSet z x (funOf xs (predSet z)) :=
  beta (seqCons.body x xs) z

theorem eq_2_23_zero (x y : Pomega) : funOf (seq2 x y) (ofNat 0) = x :=
  seq2.zero x y

theorem eq_2_23_one (x y : Pomega) : funOf (seq2 x y) (ofNat 1) = y :=
  seq2.one x y

theorem eq_2_23_ge (x y : Pomega) (n : ℕ) :
    funOf (seq2 x y) (ofNat (n + 2)) = botElem := by
  rw [seq2.app]
  ext k
  simp [condSet, predSet, ofNat, botElem]

namespace seqFun

theorem eq_iUnion_lt (u z : Pomega) :
    seqFun u z = ⋃ n, seqFunLt u z n := by
  ext k
  constructor
  · intro hk
    obtain ⟨i, hi, hki⟩ := Set.mem_iUnion₂.mp hk
    exact Set.mem_iUnion.mpr ⟨i + 1, (mem_seqFunLt).mpr ⟨i, hi, Nat.lt_succ_self i, hki
    ⟩⟩
  · intro hk
    obtain ⟨n, hn⟩ := Set.mem_iUnion.mp hk
    obtain ⟨i, hi, _, hki⟩ := (mem_seqFunLt).mp hn
    exact Set.mem_iUnion₂.mpr ⟨i, hi, hki⟩

theorem left_isScottContinuous (x : Pomega) :
    IsScottContinuous (fun u => seqFun u x) := by
  constructor
  intro u
  ext k
```

```
  constructor
  · intro hk
    obtain ⟨i, hi, hki⟩ := Set.mem_iUnion₂.mp hk
    have : k ∈ scottUnion (fun v => funOf v (ofNat i)) u := by
      rw [← (funOf.isScottContinuous_left (ofNat i)).out u]; exact hki
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, Set.mem_iUnion₂.mpr ⟨i, hi, hkn⟩⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    obtain ⟨i, hi, hki⟩ := Set.mem_iUnion₂.mp hkn
    exact Set.mem_iUnion₂.mpr ⟨i, hi,
      IsScottContinuous.monotone (funOf.isScottContinuous_left (ofNat i)) hn hki⟩

theorem right_isScottContinuous (u : Pomega) :
    IsScottContinuous (fun x => seqFun u x) := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
    obtain ⟨i, hi, hki⟩ := Set.mem_iUnion₂.mp hk
    exact mem_scottUnion.mpr ⟨2 ^ i, by simp [e.pow2, Set.singleton_subset_iff, hi],
      Set.mem_iUnion₂.mpr ⟨i, by simp [e.pow2], hki⟩⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    obtain ⟨i, hi, hki⟩ := Set.mem_iUnion₂.mp hkn
    exact Set.mem_iUnion₂.mpr ⟨i, hn hi, hki⟩

end seqFun

def seqShift (u : Pomega) : Pomega :=
  graph (fun z => seqFun u (succSet z))

namespace seqShift

theorem isScottContinuous (u : Pomega) :
    IsScottContinuous (fun z => seqFun u (succSet z)) :=
  theorem_1_3 (seqFun.right_isScottContinuous u) succSet.isScottContinuous

theorem app (u z : Pomega) :
    funOf (seqShift u) z = seqFun u (succSet z) :=
  beta (seqShift.isScottContinuous u) z

theorem left_isScottContinuous : IsScottContinuous seqShift :=
  graph_const_isScottContinuous (fun u z => seqFun u (succSet z))
    (fun z => seqFun.left_isScottContinuous (succSet z))

theorem ofNat (u : Pomega) (i : ℕ) :
    funOf (seqShift u) (ofNat i) = funOf u (ofNat (i + 1)) := by
  rw [seqShift.app]
  ext m
  constructor
  · intro hm
    obtain ⟨j, hj, hmj⟩ := Set.mem_iUnion₂.mp hm
    simp [succSet] at hj; subst hj; exact hmj
  · intro hm
```

```
    exact Set.mem_iUnion₂.mpr ⟨i + 1, ⟨i, rfl, rfl⟩, hm⟩

end seqShift

def termShift (u : Pomega) : Pomega :=
  graph (fun t => funOf u (succSet t))

namespace termShift

theorem isScottContinuous (u : Pomega) :
    IsScottContinuous (fun t => funOf u (succSet t)) :=
  theorem_1_3 (funOf.isScottContinuous u) succSet.isScottContinuous

theorem app (u t : Pomega) :
    funOf (termShift u) t = funOf u (succSet t) :=
  beta (termShift.isScottContinuous u) t

theorem left_isScottContinuous : IsScottContinuous termShift :=
  graph_const_isScottContinuous (fun u t => funOf u (succSet t))
    (fun t => funOf.isScottContinuous_left (succSet t))

theorem ofNat (u : Pomega) (i : ℕ) :
    funOf (termShift u) (ofNat i) = funOf u (ofNat (i + 1)) := by
  rw [termShift.app, succSet.ofNat]

end termShift

namespace seqFunLt

theorem succ (u z : Pomega) (n : ℕ) :
    condSet z (funOf u (ofNat 0)) (seqFunLt (seqShift u) (predSet z) n) =
      seqFunLt u z (n + 1) := by
  ext k
  constructor
  · intro hk
    rcases hk with ⟨hk0, h0z⟩ | ⟨hpos, t, ht⟩
    · exact (mem_seqFunLt).mpr ⟨0, h0z, Nat.succ_pos n, hk0⟩
    · obtain ⟨i, hi, hlt, hki⟩ := (mem_seqFunLt).mp hpos
      refine (mem_seqFunLt).mpr ⟨i + 1, hi, Nat.succ_lt_succ hlt, ?_⟩
      simpa [seqShift.ofNat] using hki
  · intro hk
    obtain ⟨i, hi, hlt, hki⟩ := (mem_seqFunLt).mp hk
    cases i with
    | zero => exact Or.inl ⟨hki, hi⟩
    | succ i =>
      refine Or.inr ⟨?_, i, hi⟩
      refine (mem_seqFunLt).mpr ⟨i, hi, Nat.lt_of_succ_lt_succ hlt, ?_⟩
      simpa [seqShift.ofNat] using hki

theorem term (u z : Pomega) (n : ℕ) :
    condSet z (funOf u (ofNat 0)) (seqFunLt (termShift u) (predSet z) n) =
      seqFunLt u z (n + 1) := by
  ext k
  constructor
  · intro hk
    rcases hk with ⟨hk0, h0z⟩ | ⟨hpos, t, ht⟩
```

```
    · exact (mem_seqFunLt).mpr ⟨0, h0z, Nat.succ_pos n, hk0⟩
    · obtain ⟨i, hi, hlt, hki⟩ := (mem_seqFunLt).mp hpos
      refine (mem_seqFunLt).mpr ⟨i + 1, hi, Nat.succ_lt_succ hlt, ?_⟩
      simpa [termShift.ofNat] using hki
  · intro hk
    obtain ⟨i, hi, hlt, hki⟩ := (mem_seqFunLt).mp hk
    cases i with
    | zero => exact Or.inl ⟨hki, hi⟩
    | succ i =>
      refine Or.inr ⟨?_, i, hi⟩
      refine (mem_seqFunLt).mpr ⟨i, hi, Nat.lt_of_succ_lt_succ hlt, ?_⟩
      simpa [termShift.ofNat] using hki

theorem zero (u z : Pomega) : seqFunLt u z 0 = botElem := by
  ext k
  simp [mem_seqFunLt, botElem]

end seqFunLt

end DomainTheory.DataTypesAsLattices
```

2.3.13 Distributive functions ✓

Equation 2.23 gives us the method of LAMBDA-defining *finite sequences* (in a quite natural way), and the next step is to consider *infinite sequences*. But these are just the functions $\hat{p}$ where $p : \omega \to \mathbf{P}\omega$ is arbitrary. What we need then is a condition expressible in the language equivalent to saying $u = \hat{p}$ for some p. This is the same as

$$u = \lambda x.\, \bigcup\{u_i \mid i \in x\}.$$

but the $\cup$- and set-notation is not part of LAMBDA. We are forced into a recursive definition:

$$(2.24) \quad \$ = \mathbf{Y}(\lambda s \lambda u \lambda z.\, z \supset u_0,\, s(\lambda t.\, u_{t+1})(z-1)).$$

This equation generalizes (2.22) and we have:

$$(2.25) \quad \$(u) = \lambda x.\, \bigcup\{u_i \mid i \in x\}.$$

Thus the combinator \$"revalues" an element as a distributive function. This suggests introducing theλ-notation for such functions by the equation:

$$(2.26) \quad \lambda n \in \omega.\, \tau = \$(\lambda z.\, \tau[z/n]).$$

With all these conventions LAMBDA-notation becomes very much like ordinary mathematical notation without too much strain.

Recall (from minimal extension) that a continuous $f : \mathbf{P}\omega \to \mathbf{P}\omega$ is *distributive* when $f(\varnothing) = \varnothing$ and $f(x \cup y) = f(x) \cup f(y)$. The spread $\hat{p}(x) = \bigcup\{p(n) \mid n \in x\}$ is the canonical example. `seqFun` in `sequences.lean` is $\hat{p}$ at fixed u. The combinator \$packages that revaluation, and (2.26) expresses ω-indexedλ-notation in terms of\$.

Formalization (`distributive_functions.lean`). Scott's (2.24)–(2.26) are split into a **model** step (graphs, `dollarStep`, `dollarC`) and a **language** step (`dollarStepTerm`, `termDollarStep`)

linked by `interp` and Theorems 2.4–2.5. Each Lean name is the library entry; proofs in the file are short unless noted.

Definition (`dollarStepBody`). For $s, u, z \in \mathbf{P}\omega$,

$$\texttt{dollarStepBody}(s,u,z) = z \supset \mathrm{funOf}\, u\, 0,\ \mathrm{funOf}(\mathrm{funOf}\, s\, (\texttt{seqShift}\, u))(\mathit{predSet}\, z)$$

— the McCarthy conditional form of the body in (2.24) (head u_0, tail from shifted index family at $z-1$).

Theorem (`dollarStepBody.isScottContinuous_s, ..._u, ..._z`). Each of $s \mapsto \texttt{dollarStepBody}(s,u,z)$, $u \mapsto \texttt{dollarStepBody}(s,u,z)$, and $z \mapsto \texttt{dollarStepBody}(s,u,z)$ is Scott-continuous.

Proof. `theorem_1_3` / `theorem_1_3.tuple` from continuity of `condSet`, `funOf`, `seqShift`, and `predSet`. ■

Definition (`dollarStep`). $\texttt{dollarStep}(s) = \mathbf{graph}(\lambda u.\, \mathbf{graph}(\lambda z.\, \texttt{dollarStepBody}(s,u,z)))$ — the graph of Scott's inner $\lambda u\, \lambda z$ in (2.24) at step parameter s.

Theorem (`dollarStep.isScottContinuous`). `IsScottContinuous dollarStep`.

Proof. `graph_const_isScottContinuous` and the body continuity lemmas. ■

Theorem (`dollarStep.app`, `dollarStep.app2`). $\mathrm{funOf}(\texttt{dollarStep}\, s)\, u = \mathbf{graph}(\lambda z.\, \texttt{dollarStepBody}$ and $\mathrm{funOf}(\mathrm{funOf}(\texttt{dollarStep}\, s)\, u)\, z = \texttt{dollarStepBody}(s,u,z)$.

Proof. (β) on nested graphs. ■

Theorem (`dollarStep.iterate`). For all n, u, z, $\mathrm{funOf}(\mathrm{funOf}(\mathrm{iterateBot}\, \texttt{dollarStep}\, n)\, u)\, z = \texttt{seqFunLt}\, u\, z\, n$.

Proof. Induction on n; base is $\bot$; step uses `dollarStep.app2`, unfold `dollarStepBody`, and `seqFunLt.succ` from `sequences.lean`. ■

Theorem (`dollarStep.fix_app`). $\mathrm{funOf}(\mathrm{funOf}(\mathrm{fix}\, \texttt{dollarStep})\, u)\, z = \texttt{seqFun}\, u\, z$.

Proof. Unfold `fix` as a directed union of iterates; identify with `seqFun.eq_iUnion_lt`. ■

Definition (`termDollarStepBody`, `termDollarStep`). Same as `dollarStepBody` / `dollarStep`, but `termShift` replaces `seqShift` (for interpreting LAMBDA terms that mention u_{t+1}).

Theorem (`termDollarStep.isScottContinuous`, `termDollarStep.app`, `termDollarStep.app2`, `termDollarStep.iterate`, `termDollarStep.fix_app`). Parallel to the `dollarStep` namespace; `iterate` uses `seqFunLt.term`.

Definition (`dollarStepTerm`). Closed `Term` for (2.24):

$$\mathbf{Y}(\lambda s\, \lambda u\, \lambda z.\, z \supset u_0,\ s(\lambda t.\, u_{t+1})(z-1))$$

in de Bruijn indices (`Language` / McCarthy conditional).

Theorem (`dollarStepTerm.interp`). With $\rho(i) = \bot$ for all i,

$$\mathrm{interp}(\texttt{dollarStepTerm})\, \rho = \mathbf{graph}(\texttt{termDollarStep}).$$

Proof. Unfold `interp`, `termDollarStep`, `termShift`, and `condSet`; reflexivity. ■

Definition (`dollarC`, combinator \$).

$$\texttt{dollarC} = \mathbf{graph}(\lambda u.\, \mathbf{graph}(\lambda x.\, \texttt{seqFun}\, u\, x)).$$

Scott's (2.25) is $\$(u) = \lambda x.\, \texttt{seqFun}(u,x)$ in graph form.

Theorem (`dollarC.app`, equation (2.25)). For all $u, x \in \mathbf{P}\omega$,

$$\mathrm{funOf}(\mathrm{funOf}\, \texttt{dollarC}\, u)\, x = \texttt{seqFun}\, u\, x.$$

Proof. `dollarC.app` and (β) using `seqFun.right_isScottContinuous`. ■

Theorem (`dollarC.eq_fix_termDollarStep`). `dollarC` $=$ fix `termDollarStep`.

Proof. Fixed-point law (Theorem 1.4); show each body value equals `seqFun` on the fixpoint, then re-graph. ■

Theorem (`dollarC.combinatory`). `IsCombinatory dollarC`.

Proof. `funOf Ycomb (interp dollarStepTerm ...) = dollarC` via `dollarStepTerm.interp`, Theorem 2.5, and `eq_fix_termDollarStep`; combine `Ycomb.combinatory` with Theorem 2.4 on the closed term. ■

Theorem (`eq_2_24`, spread recursion). For all $u, x \in \mathbf{P}\omega$,

$$\texttt{seqFun}\, u\, x = x \supset \text{funOf}\, u\, 0,\ \texttt{seqFun}(\texttt{seqShift}\, u)(\mathit{predSet}\, x).$$

This is the set-theoretic recursion underlying (2.24), before introducing \$.

Proof. Extensionality on members; split indices $i \in x$ into $i = 0$ vs $i = j + 1$; rewrite with `seqShift.app` and `ofNat`. ■

Theorem (`eq_2_24.Y`). `dollarC` $=$ fix `dollarStep`.

Proof. Same pattern as `dollarC.eq_fix_termDollarStep`, using `dollarStep.fix_app`. ■

Theorem (`eq_2_24.Ycomb`, equation (2.24) as Y).

$$\text{funOf}\ \texttt{Ycomb}\ (\mathbf{graph}\ \texttt{dollarStep}) = \texttt{dollarC}.$$

Proof. Theorem 2.5 on `dollarStep.isScottContinuous` and `eq_2_24.Y`. ■

Theorem (`eq_2_25`). Identical to `dollarC.app` (second form of (2.25)).

Definition (`lamOmega`, equation (2.26)). For $\tau : \omega \to \mathbf{P}\omega$ (written $\tau[n]$ for $\tau(n)$),

$$\texttt{lamOmega}\, \tau = \text{funOf}\ \texttt{dollarC}\ \left(\mathbf{graph}\ \left(\lambda z.\ \bigcup\{\tau(n) \mid n \in z\}\right)\right).$$

This is Scott's $\lambda n \in \omega.\, \tau$ as \$applied to the graph of the family$z \mapsto \bigcup\{\tau(n) \mid n \in z\}$(formally:\$$(\lambda z.\, \tau[z/n])$ once $[z/n]$ is the term substitution convention).

(Primitive recursion as a distributive function — (2.27) — is in `eq_2_27.lean` / the primitive recursion note.)

`distributive_functions.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Lambda.sequences
public import DomainTheory.DataTypesAsLattices.Lambda.theorem_2_5

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def dollarStepBody (s u z : Pomega) : Pomega :=
  condSet z (funOf u (ofNat 0))
    (funOf (funOf s (seqShift u)) (predSet z))

namespace dollarStepBody
```

```
theorem isScottContinuous_s (u z : Pomega) :
    IsScottContinuous (fun s => dollarStepBody s u z) := by
  have hinner : IsScottContinuous
      (fun s => funOf (funOf s (seqShift u)) (predSet z)) :=
    theorem_1_3 (f := fun w => funOf w (predSet z))
      (g := fun s => funOf s (seqShift u))
      (funOf.isScottContinuous_left (predSet z))
      (funOf.isScottContinuous_left (seqShift u))
  exact theorem_1_3 (condSet.isScottContinuous_right z (funOf u (ofNat 0))) hinner

theorem isScottContinuous_u (s z : Pomega) :
    IsScottContinuous (fun u => dollarStepBody s u z) := by
  have helse : IsScottContinuous
      (fun u => funOf (funOf s (seqShift u)) (predSet z)) :=
    theorem_1_3 (f := fun w => funOf w (predSet z))
      (g := fun u => funOf s (seqShift u))
      (funOf.isScottContinuous_left (predSet z))
      (theorem_1_3 (funOf.isScottContinuous s) seqShift.left_isScottContinuous)
  exact theorem_1_3.tuple
    (fun y => condSet.isScottContinuous_mid z y)
    (fun x => condSet.isScottContinuous_right z x)
    (funOf.isScottContinuous_left (ofNat 0)) helse

theorem isScottContinuous_z (s u : Pomega) :
    IsScottContinuous (fun z => dollarStepBody s u z) :=
  theorem_1_3.tuple
    (fun y => condSet.isScottContinuous_left (funOf u (ofNat 0)) y)
    (fun z => condSet.isScottContinuous_right z (funOf u (ofNat 0)))
    id_isScottContinuous
    (theorem_1_3 (funOf.isScottContinuous (funOf s (seqShift u)))
      predSet.isScottContinuous)

end dollarStepBody

def dollarStep (s : Pomega) : Pomega :=
  graph (fun u => graph (fun z => dollarStepBody s u z))

namespace dollarStep

theorem isScottContinuous : IsScottContinuous dollarStep :=
  graph_const_isScottContinuous
    (fun s u => graph (fun z => dollarStepBody s u z))
    (fun u => graph_const_isScottContinuous
      (fun s z => dollarStepBody s u z)
      (fun z => dollarStepBody.isScottContinuous_s u z))

theorem app (s u : Pomega) :
    funOf (dollarStep s) u = graph (fun z => dollarStepBody s u z) :=
  beta (graph_const_isScottContinuous (fun u z => dollarStepBody s u z)
    (fun z => dollarStepBody.isScottContinuous_u s z)) u

theorem app2 (s u z : Pomega) :
    funOf (funOf (dollarStep s) u) z = dollarStepBody s u z := by
  rw [dollarStep.app]
  exact beta (dollarStepBody.isScottContinuous_z s u) z
```

```
theorem iterate (n : ℕ) (u z : Pomega) :
    funOf (funOf (iterateBot dollarStep n) u) z = seqFunLt u z n := by
  induction n generalizing u z with
  | zero =>
    simp [iterateBot, funOf.bot, seqFunLt.zero]
  | succ n ih =>
    rw [iterateBot, dollarStep.app2, dollarStepBody, ih, seqFunLt.succ]

theorem fix_app (u z : Pomega) :
    funOf (funOf (fix dollarStep) u) z = seqFun u z := by
  have : funOf (funOf (fix dollarStep) u) z =
      ⋃ n, funOf (funOf (iterateBot dollarStep n) u) z := by
    simp [fix, funOf.iUnion]
  rw [this, seqFun.eq_iUnion_lt]
  ext k
  constructor
  · intro hk
    obtain ⟨n, hn⟩ := Set.mem_iUnion.mp hk
    exact Set.mem_iUnion.mpr ⟨n, by simpa [dollarStep.iterate] using hn⟩
  · intro hk
    obtain ⟨n, hn⟩ := Set.mem_iUnion.mp hk
    exact Set.mem_iUnion.mpr ⟨n, by simpa [dollarStep.iterate] using hn⟩

end dollarStep

def termDollarStepBody (s u z : Pomega) : Pomega :=
  condSet z (funOf u (ofNat 0))
    (funOf (funOf s (termShift u)) (predSet z))

namespace termDollarStepBody

theorem isScottContinuous_u (s z : Pomega) :
    IsScottContinuous (fun u => termDollarStepBody s u z) := by
  have helse : IsScottContinuous
      (fun u => funOf (funOf s (termShift u)) (predSet z)) :=
    theorem_1_3 (f := fun w => funOf w (predSet z))
      (g := fun u => funOf s (termShift u))
      (funOf.isScottContinuous_left (predSet z))
      (theorem_1_3 (funOf.isScottContinuous s) termShift.left_isScottContinuous)
  exact theorem_1_3.tuple
    (fun y => condSet.isScottContinuous_mid z y)
    (fun x => condSet.isScottContinuous_right z x)
    (funOf.isScottContinuous_left (ofNat 0)) helse

theorem isScottContinuous_z (s u : Pomega) :
    IsScottContinuous (fun z => termDollarStepBody s u z) :=
  theorem_1_3.tuple
    (fun y => condSet.isScottContinuous_left (funOf u (ofNat 0)) y)
    (fun z => condSet.isScottContinuous_right z (funOf u (ofNat 0)))
    id_isScottContinuous
    (theorem_1_3 (funOf.isScottContinuous (funOf s (termShift u)))
      predSet.isScottContinuous)

theorem isScottContinuous_s (u z : Pomega) :
    IsScottContinuous (fun s => termDollarStepBody s u z) := by
  have hinner : IsScottContinuous
```

```
      (fun s => funOf (funOf s (termShift u)) (predSet z)) :=
    theorem_1_3 (f := fun w => funOf w (predSet z))
      (g := fun s => funOf s (termShift u))
      (funOf.isScottContinuous_left (predSet z))
      (funOf.isScottContinuous_left (termShift u))
  exact theorem_1_3 (condSet.isScottContinuous_right z (funOf u (ofNat 0))) hinner

end termDollarStepBody

def termDollarStep (s : Pomega) : Pomega :=
  graph (fun u => graph (fun z => termDollarStepBody s u z))

namespace termDollarStep

theorem isScottContinuous : IsScottContinuous termDollarStep :=
  graph_const_isScottContinuous
    (fun s u => graph (fun z => termDollarStepBody s u z))
    (fun u => graph_const_isScottContinuous
      (fun s z => termDollarStepBody s u z)
      (fun z => termDollarStepBody.isScottContinuous_s u z))

theorem app (s u : Pomega) :
    funOf (termDollarStep s) u = graph (fun z => termDollarStepBody s u z) :=
  beta (graph_const_isScottContinuous (fun u z => termDollarStepBody s u z)
    (fun z => termDollarStepBody.isScottContinuous_u s z)) u

theorem app2 (s u z : Pomega) :
    funOf (funOf (termDollarStep s) u) z = termDollarStepBody s u z := by
  rw [app]
  exact beta (termDollarStepBody.isScottContinuous_z s u) z

theorem iterate (n : ℕ) (u z : Pomega) :
    funOf (funOf (iterateBot termDollarStep n) u) z = seqFunLt u z n := by
  induction n generalizing u z with
  | zero =>
    simp [iterateBot, funOf.bot, seqFunLt.zero]
  | succ n ih =>
    rw [iterateBot, app2, termDollarStepBody, ih, seqFunLt.term]

theorem fix_app (u z : Pomega) :
    funOf (funOf (fix termDollarStep) u) z = seqFun u z := by
  have : funOf (funOf (fix termDollarStep) u) z =
      ⋃ n, funOf (funOf (iterateBot termDollarStep n) u) z := by
    simp [fix, funOf.iUnion]
  rw [this, seqFun.eq_iUnion_lt]
  ext k
  constructor
  · intro hk
    obtain ⟨n, hn⟩ := Set.mem_iUnion.mp hk
    exact Set.mem_iUnion.mpr ⟨n, by simpa [iterate] using hn⟩
  · intro hk
    obtain ⟨n, hn⟩ := Set.mem_iUnion.mp hk
    exact Set.mem_iUnion.mpr ⟨n, by simpa [iterate] using hn⟩

end termDollarStep
```

```
def dollarStepTerm : Term :=
  .lam 0 (.lam 1 (.lam 2
    (.cond (.var 2)
      (.app (.var 1) .zero)
      (.app (.app (.var 0) (.lam 3 (.app (.var 1) (.succ (.var 3)))))
        (.pred (.var 2))))))

namespace dollarStepTerm

theorem interp :
    interp dollarStepTerm (fun _ => botElem) = graph termDollarStep := by
  unfold dollarStepTerm termDollarStep termDollarStepBody termShift DomainTheory.
   DataTypesAsLattices.interp
  apply congrArg graph
  funext s
  simp only[envSet]
  apply congrArg graph
  funext u
  simp only[envSet]
  apply congrArg graph
  funext z
  simp[envSet, condSet, succSet]
  rfl

end dollarStepTerm

def dollarC : Pomega :=
  graph (fun u => graph (fun x => seqFun u x))

namespace dollarC
theorem app (u : Pomega) :
    funOf dollarC u = graph (fun x => seqFun u x) :=
  beta (graph_const_isScottContinuous (fun u x => seqFun u x)
    (fun x => seqFun.left_isScottContinuous x)) u

theorem eq_fix_termDollarStep : dollarC = fix termDollarStep := by
  have hfix : termDollarStep (fix termDollarStep) = fix termDollarStep :=
    (theorem_1_4 termDollarStep.isScottContinuous).1
  have hbody : ∀ u z, termDollarStepBody (fix termDollarStep) u z = seqFun u z := by
    intro u z
    calc termDollarStepBody (fix termDollarStep) u z
        = funOf (funOf (termDollarStep (fix termDollarStep)) u) z :=
          (termDollarStep.app2 _ _ _).symm
      _ = funOf (funOf (fix termDollarStep) u) z := by rw [hfix]
      _ = seqFun u z := termDollarStep.fix_app u z
  have : termDollarStep (fix termDollarStep) =
      graph (fun u => graph (fun z => seqFun u z)) := by
    apply congrArg graph
    funext u
    apply congrArg graph
    funext z
    exact hbody u z
  exact this.symm.trans hfix

theorem combinatory : IsCombinatory dollarC := by
  have hY : funOf Ycomb (interp dollarStepTerm (fun _ => botElem)) = dollarC := by
```

```
    rw [dollarStepTerm.interp, theorem_2_5 termDollarStep.isScottContinuous,
      dollarC.eq_fix_termDollarStep]
  exact hY ▸ IsCombinatory.app Ycomb.combinatory (theorem_2_4.closed dollarStepTerm)

end dollarC

theorem eq_2_24 (u x : Pomega) :
    seqFun u x =
      condSet x (funOf u (ofNat 0))
        (seqFun (seqShift u) (predSet x)) := by
  ext k
  constructor
  · intro hk
    obtain ⟨i, hi, hki⟩ := Set.mem_iUnion₂.mp hk
    cases i with
    | zero => exact Or.inl ⟨hki, hi⟩
    | succ i =>
      refine Or.inr ⟨?_, i, hi⟩
      refine Set.mem_iUnion₂.mpr ⟨i, hi, ?_⟩
      have : funOf (seqShift u) (ofNat i) = funOf u (ofNat (i + 1)) := by
        rw [seqShift.app]
        ext m
        constructor
        · intro hm
          obtain ⟨j, hj, hmj⟩ := Set.mem_iUnion₂.mp hm
          simp [succSet, ofNat] at hj; subst hj; exact hmj
        · intro hm
          exact Set.mem_iUnion₂.mpr ⟨i + 1, ⟨i, rfl, rfl⟩, hm⟩
      simpa [this] using hki
  · intro hk
    rcases hk with ⟨hk0, h0x⟩ | ⟨hpos, t, ht⟩
    · exact Set.mem_iUnion₂.mpr ⟨0, h0x, hk0⟩
    · obtain ⟨i, hi, hki⟩ := Set.mem_iUnion₂.mp hpos
      have : funOf (seqShift u) (ofNat i) = funOf u (ofNat (i + 1)) := by
        rw [seqShift.app]
        ext m
        constructor
        · intro hm
          obtain ⟨j, hj, hmj⟩ := Set.mem_iUnion₂.mp hm
          simp [succSet, ofNat] at hj; subst hj; exact hmj
        · intro hm
          exact Set.mem_iUnion₂.mpr ⟨i + 1, ⟨i, rfl, rfl⟩, hm⟩
      refine Set.mem_iUnion₂.mpr ⟨i + 1, hi, ?_⟩
      simpa [this] using hki

namespace eq_2_24

theorem Y : dollarC = fix dollarStep := by
  have hfix : dollarStep (fix dollarStep) = fix dollarStep :=
    (theorem_1_4 dollarStep.isScottContinuous).1
  have hbody : ∀ u z, dollarStepBody (fix dollarStep) u z = seqFun u z := by
    intro u z
    calc dollarStepBody (fix dollarStep) u z
        = funOf (funOf (dollarStep (fix dollarStep)) u) z :=
          (dollarStep.app2 _ _ _).symm
      _ = funOf (funOf (fix dollarStep) u) z := by rw [hfix]
```

```
      _ = seqFun u z := dollarStep.fix_app u z
  have : dollarStep (fix dollarStep) =
      graph (fun u => graph (fun z => seqFun u z)) := by
    apply congrArg graph
    funext u
    apply congrArg graph
    funext z
    exact hbody u z
  exact this.symm.trans hfix

theorem Ycomb : funOf Ycomb (graph dollarStep) = dollarC := by
  rw [theorem_2_5 dollarStep.isScottContinuous, eq_2_24.Y]

end eq_2_24

theorem eq_2_25 (u x : Pomega) :
    funOf (funOf dollarC u) x = seqFun u x := by
  rw [dollarC.app]
  exact beta (seqFun.right_isScottContinuous u) x

def lamOmega (τ : ℕ → Pomega) : Pomega :=
  funOf dollarC (graph (fun z => ⋃ n ∈ z, τ n))

end DomainTheory.DataTypesAsLattices
```

2.3.14 The definability theorem ✓

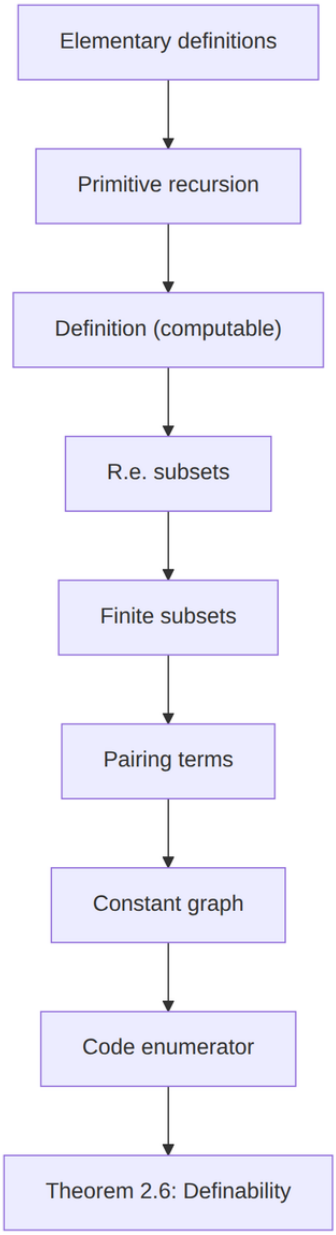

Figure 29: The definability theorem ✓.

Elementary definitions ✓ We state now a sequence of minor results which show why some simple functions and constants are LAMBDA-definable.

$$\bot = (\lambda x.\, x(x))(\lambda x.\, x(x)); \tag{2.14}$$

$$(2.15)\quad x \cup y = (\lambda z.\, 0) \supset x, y; \quad \text{(Hint: } 0, 1 \in \lambda z.\, 0)$$

$$(2.16)\quad \top = \mathbf{Y}(\lambda x.\, 0 \cup (x+1));$$

$$(2.17)\quad x \cap y = \mathbf{Y}(\lambda f \lambda x \lambda y.\, x \supset (y \supset 0, \bot), f(x-1)(y-1)+1)(x)(y).$$

The elements $\bot$ and $\top$ are graphs, by the way, and we can characterize them as the only fixed points of the combinator $\mathbf{K}$:

$$(2.18)\quad a = \lambda x.\, a \quad \text{iff} \quad a = \bot \quad \text{or} \quad a = \top.$$

Formalization. Scott's (2.14)–(2.18) are separate library entries; this note's `@import` is `eq_2_18.lean`, which proves (2.18) and also holds the nested `pack4` pairing used later in §2.6. Each name below is the Lean theorem or definition; proofs live in the cited module unless noted.

Theorem (`eq_2_14`, equation (2.14)).

$$\mathrm{funOf}(\omega(\mathrm{id}))(\omega(\mathrm{id})) = \bot,$$

where $\omega(u) = \lambda x.\, u(x(x))$ is `omegaComb` and the left side is Scott's $(\lambda x.\, x(x))(\lambda x.\, x(x))$ as graphs.

Proof. Identify the ω-subcombinator with `graph (fun x => funOf x x)`; apply `omega_first_recursion` so every finite iterate is $\bot$. ■
(Module `eq_2_14.lean`.)

Theorem (`eq_2_15`, equation (2.15)). For all $x, y \in \mathbf{P}\omega$,

$$\mathrm{condSet}(\lambda z.\, 0,\ x,\ y) = x \cup y,$$

with $\lambda z.\, 0$ formalized as `graph (fun _ => ofNat 0)` and $0, 1 \in \lambda z.\, 0$ from membership in that constant graph.

Proof. Case-split on the McCarthy conditional using $0, 1 \in \mathrm{graph}(\lambda z.\, 0)$. ■
(Module `eq_2_15.lean`.)

Theorem (`eq_2_16`, equation (2.16)). $\mathrm{fix}(\mathtt{topRec}) = \top$, where `topRec` is the step $x \mapsto 0 \cup (x+1)$ underlying $\mathbf{Y}(\lambda x.\, 0 \cup (x+1))$.

Proof. $\top$ is universal; for membership in $\mathrm{fix}(\mathtt{topRec})$, use that iterate $n+1$ already contains n. ■
(Module `eq_2_16.lean`.)

Theorem (`eq_2_17`, equation (2.17)). For all $x, y \in \mathbf{P}\omega$,

$$\mathrm{funOf}(\mathrm{funOf}(\mathtt{interC})\, x)\, y = x \cap y,$$

with `interC` the graph of Scott's Y-based intersection step.

Proof. Strong induction on the argument n; unfold `interC.app` and the conditional branches matching (2.17). ■

Theorem (`eq_2_17.step`). The same intersection as a McCarthy recursion:

$$x \cap y = x \supset (y \supset 0,\ \bot),\ f(x-1)(y-1)+1$$

at the level of `condSet` / `predSet` / `succSet` (the body of (2.17) before abstracting f).

Proof. Extensionality; parallel case analysis to `eq_2_17`. ■

(Module `eq_2_17.lean`.)

Theorem (`eq_2_18.bot`, `eq_2_18.top`). $\bot = \lambda x.\, \bot$ and $\top = \lambda x.\, \top$ as graphs: `botElem = graph (fun _ => botElem)` and `topElem = graph (fun _ => topElem)`.

Proof. For $\bot$, no pair lies in the empty set; for $\top$, every coded pair's value lies in $\mathbf{P}\omega$. ■

Theorem (`eq_2_18`, equation (2.18)). For $a \in \mathbf{P}\omega$,

$$a = \mathbf{graph}(\lambda x.\, a) \leftrightarrow a = \bot \vee a = \top.$$

So the only $\mathbf{K}$-fixed graphs are $\bot$ and $\top$.

Proof. If a is a constant graph and $a \neq \top$, least excluded index forces $0 \notin a$; if $a \neq \bot$, least included index yields $0 \in a$ and contradiction. Conversely use `eq_2_18.bot` / `eq_2_18.top`. ■

(Module `eq_2_18.lean` — owner of this note.)

Definition (`pack4`, `pack4.proj1`–`proj4`). Nested `Nat.pair` coding of four naturals and its unpairing projections (not numbered in Scott's (2.14)–(2.18); bundled in `eq_2_18.lean` for §2.6 computability proofs).

`eq_2_18.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import DomainTheory.DataTypesAsLattices.Lambda.Language
public import Mathlib.Computability.RE

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

namespace eq_2_18

theorem bot : botElem = graph (fun _ => botElem) := by
  ext p
  constructor
  · intro hp; exact hp.elim
  · intro hp
    rcases hp with ⟨_, _, _, hm⟩
    simp [botElem] at hm

theorem top : topElem = graph (fun _ => topElem) := by
  ext p
  constructor
  · intro _
    obtain ⟨n, m, rfl⟩ := exists_pair p
    exact ⟨n, m, rfl, Set.mem_univ m⟩
  · intro; trivial

end eq_2_18

theorem eq_2_18 (a : Pomega) :
```

```
    a = graph (fun _ => a) ↔ a = botElem ∨ a = topElem := by
  constructor
  · intro ha
    by_cases htop : a = topElem
    · exact Or.inr htop
    · have hex : ∃ k, k ∈ a := by
        by_contra h
        apply htop
        ext k
        constructor
        · intro; trivial
        · intro
          exact not_not.mp (not_exists.mp h k)
      obtain ⟨k, hk, hmin⟩ := exists_least_not_mem hex
      obtain ⟨n, m, hnm⟩ := exists_pair k
      have hm : m ∈ a := by
        intro hma
        have : pair n m ∈ a :=
          ha.symm ▸ (⟨n, m, rfl, hma⟩ : pair n m ∈ graph (fun _ => a))
        exact hk (by rwa [hnm] at this)
      have : m = k :=
        le_antisymm (by rw [← hnm]; exact pair_le_right n m)
          (le_of_not_gt fun hlt => hm (hmin m hlt))
      have hnmk : pair n k = k := by simpa [this] using hnm
      have ⟨_, hk0⟩ := pair_eq_right hnmk
      have h0 : 0 ∈ a := by simpa [hk0] using hk
      by_cases hbot : a = botElem
      · exact Or.inl hbot
      · obtain ⟨l, hl, hlmin⟩ := exists_least_mem (Set.nonempty_iff_ne_empty.mpr hbot)
        obtain ⟨i, j, hij⟩ := exists_pair l
        have hj : j ∈ a := by
          have : pair i j ∈ graph (fun _ => a) :=
            ha ▸ (by rwa [hij] : pair i j ∈ a)
          rcases this with ⟨i', j', hp, hj'⟩
          obtain ⟨rfl, rfl⟩ := pair_inj hp
          exact hj'
        have : j = l :=
          le_antisymm (by rw [← hij]; exact pair_le_right i j)
            (le_of_not_gt fun hlt => hlmin j hlt hj)
        have hil : pair i l = l := by simpa [this] using hij
        have ⟨_, hl0⟩ := pair_eq_right hil
        exact (h0 (by simpa [hl0] using hl)).elim
  · intro h
    rcases h with rfl | rfl
    · exact eq_2_18.bot
    · exact eq_2_18.top

def pack4 (n0 n1 n2 m : ℕ) : ℕ :=
  Nat.pair n0 (Nat.pair n1 (Nat.pair n2 m))

namespace pack4

open Encodable
open Nat.Partrec (Code)
open Nat.Partrec.Code
```

```
def proj1 (t : ℕ) : ℕ := (Nat.unpair t).1

def proj2 (t : ℕ) : ℕ := (Nat.unpair (Nat.unpair t).2).1

def proj3 (t : ℕ) : ℕ := (Nat.unpair (Nat.unpair (Nat.unpair t).2).2).1

def proj4 (t : ℕ) : ℕ := (Nat.unpair (Nat.unpair (Nat.unpair t).2).2).2

end pack4

end DomainTheory.DataTypesAsLattices
```

Primitive recursion ✓ Suppose that f is any continuous function and $a \in \mathbf{P}\omega$. We can define $p : \omega \to \mathbf{P}\omega$ in the ordinary way by primitive recursion where:

$$p(0) = a;$$

$$p(n+1) = f(n)(p(n)).$$

The question is: can we give a LAMBDA-definition for $\hat{p}$ (in terms of f and a as constants, say)? The answer is clear, for we can prove:

$$(2.27) \quad \hat{p} = \mathbf{Y}(\lambda u \lambda n \in \omega.\, n \supset a,\ f(n-1)(u(n-1))).$$

This already shows that a large part of the definitions of recursion theory can be given in this special language. Of course, simultaneous (primitive) recursions can be transcribed into LAMBDA with the aid of the ordered tuples of (2.22), (2.23) above. But we can go further and connect with partial (and general) recursive functions. We state first a definition.

Formalization (`primitive_recursion.lean`). Scott's scheme $p(0) = a, p(n+1) = f(n)(p(n))$ is `primRecVal`; the spread $\hat{p}(x) = \bigcup\{p(n) \mid n \in x\}$ is `primRecHat`; the recursive step in (2.27) is `primRecStep`; **(2.27)** is `eq_2_27` via \$ (`dollarC`). Each name below is in this module.

Definition (`primRecStepTerm`). LAMBDA term for $\lambda u\, \lambda n.\, n \supset a,\ f(n-1)(u(n-1))$ (de Bruijn form with parameters a, f abstracted).

Theorem (`primRecStepTerm.interp`). Interpretation of `primRecStepTerm` matches the body of `primRecStep` at each u, n.

Proof. Four (β) steps and unfold `interp` / `condSet`. ■

Definition (`primRecStep`). $\texttt{primRecStep}(a, f)(u) = \mathbf{graph}(\lambda n.\, n \supset a,\ f(\mathit{predSet}\, n)(u(\mathit{predSet}\, n)))$ — the step function inside Scott's $\mathbf{Y}$ in (2.27).

Theorem (`primRecStep.body_isScottContinuous_n`). For fixed a, f, and u, the map $n \mapsto (n \supset a,\ f(n-1)(u(n-1)))$ is Scott continuous.

Theorem (`primRecStep.graph_of`). The graph of $u \mapsto \texttt{primRecStep}(a, f)(u)$ is the interpretation of `primRecStepTerm` applied to the parameters a and f.

Theorem (`primRecStep.isScottContinuous`). The map $u \mapsto \texttt{primRecStep}(a, f)(u)$ is Scott continuous.

Theorem (`primRecStep.app`). Applying that graph at n returns $n \supset a,\ f(n-1)(u(n-1))$.

Definition (`primRecVal`). $\texttt{primRecVal}(a, f)(0) = a, \texttt{primRecVal}(a, f)(n{+}1) = \mathrm{funOf}(\mathrm{funOf}\, f\, (\mathrm{ofNat}\, n))(\mathrm{p}$ — the numeric schema above.

Theorem (`primRecVal.fix`). $\mathrm{funOf}(\mathrm{fix}(\mathtt{primRecStep}\,a\,f))(\mathrm{ofNat}\,n) = \mathtt{primRecVal}(a,f)\,n$ for all n.

Proof. Fixed-point law (Theorem 1.4); case $n = 0$ and $n+1$ via `primRecStep.app` and predecessor lemmas. ■

Definition (`primRecHat`). $\mathtt{primRecHat}(a,f)(x) = \bigcup\{\mathtt{primRecVal}(a,f)(n) \mid n \in x\}$ — formal $\hat{p}$.

Theorem (`primRecHat.zero`, `primRecHat.ofNat`). $\mathtt{primRecHat}(a,f)(0) = a$ and $\mathtt{primRecHat}(a,f)(n) = \mathtt{primRecVal}(a,f)(n)$ on singletons $\mathrm{ofNat}\,n$.

Theorem (`eq_2_27`, equation (2.27)). For all $a, f, x \in \mathbf{P}\omega$,

$$\mathtt{primRecHat}(a,f)(x) = \mathrm{funOf}(\mathrm{funOf}\,\mathtt{dollarC}\,(\mathrm{fix}(\mathtt{primRecStep}\,a\,f)))(x).$$

Proof. Rewrite with `eq_2_25` (spread as \$); index-wise use `primRecVal.fix`. ■

Definition (`precTerm`). A second LAMBDA term for the same scheme, written with an explicit zero value, step function, and predecessor rather than with $\mathbf{Y}$. The combinator `precC` is its interpretation.

`primitive_recursion.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Lambda.theorem_2_2
public import DomainTheory.DataTypesAsLattices.Lambda.eq_2_7_zero
public import DomainTheory.DataTypesAsLattices.Lambda.eq_2_7_succ
public import DomainTheory.DataTypesAsLattices.Lambda.distributive_functions
public import Mathlib.Computability.RE
public import DomainTheory.DataTypesAsLattices.Lambda.Language
public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Enumeration.Avoids

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def primRecStepTerm : Term :=
  .lam 0 (.lam 1 (.lam 2 (.lam 3
    (.cond (.var 3) (.var 0)
      (.app (.app (.var 1) (.pred (.var 3)))
        (.app (.var 2) (.pred (.var 3))))))))

namespace primRecStepTerm

theorem interp (a f u n : Pomega) :
    funOf (funOf (funOf (funOf (interp primRecStepTerm (fun _ => botElem)) a) f) u) n
    =
      condSet n a (funOf (funOf f (predSet n)) (funOf u (predSet n))) := by
  change funOf (funOf (funOf (funOf (DomainTheory.DataTypesAsLattices.interp (Term.lam
    0 _) (fun _ => botElem)) a) f) u) n = _
  rw [theorem_2_2.beta]
  rw [theorem_2_2.beta]
  rw [theorem_2_2.beta]
  rw [theorem_2_2.beta]
  simp [_root_.DomainTheory.DataTypesAsLattices.interp, envSet, Function.update]
```

```
end primRecStepTerm

def primRecStep (a f u : Pomega) : Pomega :=
  graph (fun n => condSet n a (funOf (funOf f (predSet n)) (funOf u (predSet n))))

namespace primRecStep

theorem body_isScottContinuous_n (a f u : Pomega) :
    IsScottContinuous (fun n =>
      condSet n a (funOf (funOf f (predSet n)) (funOf u (predSet n)))) :=
  theorem_1_3.tuple
    (fun y => condSet.isScottContinuous_left a y)
    (fun n => condSet.isScottContinuous_right n a)
    id_isScottContinuous
    (theorem_1_3.tuple
      (fun y => funOf.isScottContinuous_left y)
      (fun x => funOf.isScottContinuous x)
      (theorem_1_3 (funOf.isScottContinuous f) predSet.isScottContinuous)
      (theorem_1_3 (funOf.isScottContinuous u) predSet.isScottContinuous))

theorem graph_of (a f : Pomega) :
    graph (primRecStep a f) =
      funOf (funOf (interp primRecStepTerm (fun _ => botElem)) a) f := by
  change graph (primRecStep a f) =
    funOf (funOf (DomainTheory.DataTypesAsLattices.interp (Term.lam 0 (.lam 1 (.lam 2
    (.lam 3
      (.cond (.var 3) (.var 0)
        (.app (.app (.var 1) (.pred (.var 3)))
          (.app (.var 2) (.pred (.var 3))))))))) (fun _ => botElem)) a) f
  rw [theorem_2_2.beta, theorem_2_2.beta]
  apply congrArg graph
  funext u
  apply congrArg graph
  funext n
  simp [DomainTheory.DataTypesAsLattices.interp, envSet, Function.update]

theorem isScottContinuous (a f : Pomega) :
    IsScottContinuous (primRecStep a f) :=
  graph_const_isScottContinuous
    (fun u n => condSet n a (funOf (funOf f (predSet n)) (funOf u (predSet n))))
    (fun n => theorem_1_3 (condSet.isScottContinuous_right n a)
      (theorem_1_3 (funOf.isScottContinuous (funOf f (predSet n)))
        (funOf.isScottContinuous_left (predSet n))))

theorem app (a f u n : Pomega) :
    funOf (primRecStep a f u) n =
      condSet n a (funOf (funOf f (predSet n)) (funOf u (predSet n))) :=
  beta (primRecStep.body_isScottContinuous_n a f u) n

end primRecStep

def primRecVal (a f : Pomega) : ℕ → Pomega
  | 0 => a
  | n + 1 => funOf (funOf f (ofNat n)) (primRecVal a f n)

namespace primRecVal
```

```
theorem fix (a f : Pomega) : ∀ n,
    funOf (DomainTheory.DataTypesAsLattices.fix (primRecStep a f)) (ofNat n) =
      primRecVal a f n
  | 0 => by
    have hfix := (theorem_1_4 (primRecStep.isScottContinuous a f)).1
    calc funOf (DomainTheory.DataTypesAsLattices.fix (primRecStep a f)) (ofNat 0)
        = funOf (primRecStep a f
            (DomainTheory.DataTypesAsLattices.fix (primRecStep a f))) (ofNat 0) := by
          rw [hfix]
      _ = condSet (ofNat 0) a
            (funOf (funOf f (predSet (ofNat 0)))
              (funOf (DomainTheory.DataTypesAsLattices.fix (primRecStep a f))
                (predSet (ofNat 0)))) :=
          primRecStep.app a f _ _
      _ = a := eq_2_7_zero _ _
  | n + 1 => by
    have hfix := (theorem_1_4 (primRecStep.isScottContinuous a f)).1
    calc funOf (DomainTheory.DataTypesAsLattices.fix (primRecStep a f)) (ofNat (n + 1)
    )
        = funOf (primRecStep a f
            (DomainTheory.DataTypesAsLattices.fix (primRecStep a f))) (ofNat (n + 1))
    := by
          rw [hfix]
      _ = condSet (ofNat (n + 1)) a
            (funOf (funOf f (predSet (ofNat (n + 1))))
              (funOf (DomainTheory.DataTypesAsLattices.fix (primRecStep a f))
                (predSet (ofNat (n + 1))))) :=
          primRecStep.app a f _ _
      _ = funOf (funOf f (ofNat n))
            (funOf (DomainTheory.DataTypesAsLattices.fix (primRecStep a f)) (ofNat n))
     := by
          rw [eq_2_7_succ, predSet.ofNat_succ]
      _ = funOf (funOf f (ofNat n)) (primRecVal a f n) := by
          rw [?fix? a f n]

end primRecVal

def primRecHat (a f x : Pomega) : Pomega :=
  ⋃ n ∈ x, primRecVal a f n

namespace primRecHat

theorem zero (a f : Pomega) : primRecHat a f (ofNat 0) = a := by
  ext k
  constructor
  · intro hk
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion₂.mp hk
    subst hn; simpa [primRecVal] using hkn
  · intro hk
    exact Set.mem_iUnion₂.mpr ⟨0, rfl, hk⟩

theorem ofNat (a f : Pomega) : ∀ n,
    primRecHat a f (ofNat n) = primRecVal a f n
  | 0 => primRecHat.zero a f
  | n + 1 => by
```

```
    ext k
    constructor
    · intro hk
      obtain ⟨m, hm, hkm⟩ := Set.mem_iUnion₂.mp hk
      subst hm; simpa [primRecVal] using hkm
    · intro hk
      exact Set.mem_iUnion₂.mpr ⟨n + 1, rfl, hk⟩

end primRecHat

theorem eq_2_27 (a f x : Pomega) :
    primRecHat a f x = funOf (funOf dollarC (fix (primRecStep a f))) x := by
  rw [eq_2_25]
  ext k
  constructor
  · intro hk
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion₂.mp hk
    refine Set.mem_iUnion₂.mpr ⟨n, hn, ?_⟩
    simpa [primRecVal.fix] using hkn
  · intro hk
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion₂.mp hk
    refine Set.mem_iUnion₂.mpr ⟨n, hn, ?_⟩
    simpa [primRecVal.fix] using hkn

open Encodable

open Nat.Partrec (Code)

open Nat.Partrec.Code

def precTerm : Term :=
  .lam 0
    (.app
      (.app
        (.app (.var 3) (.app (.var 4) (.app (.var 6) (.var 0))))
        (.lam 1 (.lam 2
          (.app (.var 5)
            (.app (.app (.var 8) (.app (.var 6) (.var 0)))
              (.app (.app (.var 8) (.var 1)) (.var 2))))))))
      (.app (.var 7) (.var 0)))

end DomainTheory.DataTypesAsLattices
```

Definition (computable) ✓ **DEFINITION.** A continuous function f of k-variables is *computable* iff the relationship

$$m \in f(e_{n_0})(e_{n_1}) \cdots (e_{n_{k-1}})$$

is recursively enumerable (r.e.) in the integer variables $m, n_0, n_1, \ldots, n_{k-1}$.

If q is a partial recursive function in the usual sense, then we can regard it as a mapping $q : \omega \to \omega \cup \{\perp\}$, where $q(n) = \perp$ means that q is undefined at n. Saying that q is partial recursive is just to say that $m \in q(n)$ is r.e. as a relation in n and m. It is easy to see that this is in turn equivalent to the recursive enumerability of the relationship $m \in \hat{q}(e_n)$; and so our definition is formally a generalization of the usual one. But it is

also intuitively reasonable. To "compute" $y = f(x)$, in the one-variable case, we proceed by enumeration. First we begin the enumeration of all finite subsets $e_n \subseteq x$. For each of these f starts up an enumeration of the set $f(e_n)$; so we sit back and observe which $m \in f(e_n)$ by enumeration. The totality of all such m for all $e_n \subseteq x$ forms in the end the set y.

R.e. subsets ✓ Scott treats the *recursively enumerable* objects as a subcollection $\mathbf{RE} \subseteq \mathbf{P}\omega$: those elements u whose membership is susceptible to enumeration. In ordinary recursion theory a set $A \subseteq \omega$ is r.e. when the relation "$n \in A$" is recursively enumerable. An element $u \in \mathbf{P}\omega$ is itself a set of natural numbers (integers coding finite or infinite subsets), so the same idea applies: u is r.e. when one can enumerate the instances of membership $n \in u$.

This is exactly the hypothesis in Theorem 2.6 (ii), where the λ-term associated with a continuous function f is required to be an r.e. *set* of codes. The proof that LAMBDA-definable graphs are r.e. and the construction of r.e. sets from primitive recursive functions both live in the $\mathbf{RE}$ fragment of $\mathbf{P}\omega$ closed under application and definability.

Formalization (`IsRE.lean`). Mathlib's `REPred` captures "recursively enumerable as a predicate on $\mathbb{N}$". For $u \in \mathbf{P}\omega$, **`IsRE u`** holds when $\lambda n.\, n \in u$ is of that kind—equivalently, the membership set $\{\, n \in \omega \mid n \in u \,\}$ is r.e. The proof field is packaged as `IsRE.out`; downstream lemmas use `IsRE` for combinators, application, and Theorem 2.6.

Definition (`IsRE`). $u \in \mathbf{P}\omega$ is **r.e.** iff the membership predicate $n \mapsto (n \in u)$ is recursively enumerable (`IsRE u`).

Theorem (`REPred.empty`). The constantly false predicate on ω is recursively enumerable.

Theorem (`REPred.true`). The constantly true predicate, on any primcodable type, is recursively enumerable.

Theorem (`REPred.or`). If p and q are recursively enumerable predicates on the same primcodable type, then so is $a \mapsto p(a) \vee q(a)$.

`IsRE.lean`

```
module

public import Mathlib.Computability.RE
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

class IsRE (u : Pomega) : Prop where
  out : REPred fun n : ℕ => n ∈ u

theorem REPred.empty : REPred fun _ : ℕ => False := by
  unfold REPred
  refine (Partrec.none (α := ℕ) (σ := Unit)).of_eq fun _ => ?_
  ext
  simp [Part.assert]

theorem REPred.true {α} [Primcodable α] : REPred fun _ : α => True := by
  unfold REPred
  refine (Decidable.Partrec.const' (Part.some ())).of_eq fun _ => ?_
  ext
```

```
  simp [Part.assert]

theorem REPred.or {α} [Primcodable α] {p q : α → Prop}
    (hp : REPred p) (hq : REPred q) :
    REPred fun a => p a ∨ q a := by
  obtain ⟨k, hk, H⟩ := Partrec.merge' hp hq
  have hg : Computable₂ fun (_ : α) (_ : Unit) => () :=
    (Computable.const (α := α × Unit) ()).to₂
  refine Partrec.of_eq (hk.map hg) fun a => ?_
  ext
  constructor
  · intro hu
    rw [Part.mem_map_iff] at hu
    obtain ⟨x, hx, hxu⟩ := hu
    have hx' := (H a).1 x hx
    have hpq : p a ∨ q a := by
      cases hx' with
      | inl h =>
        exact Or.inl (Part.mem_assert_iff.1 h).1
      | inr h =>
        exact Or.inr (Part.mem_assert_iff.1 h).1
    exact Part.mem_assert_iff.2 ⟨hpq, Part.mem_some_iff.2 hxu.symm⟩
  · intro hu
    have hpq : p a ∨ q a := (Part.mem_assert_iff.1 hu).1
    have hd : (k a).Dom := (H a).2.mpr <|
      hpq.imp (fun h => ⟨h, trivial⟩) (fun h => ⟨h, trivial⟩)
    rw [Part.mem_map_iff]
    exact ⟨(), ⟨hd, rfl⟩, (Part.mem_some_iff.1 (Part.mem_assert_iff.1 hu).2).symm⟩

end DomainTheory.DataTypesAsLattices
```

Finite subsets The basic neighbourhoods $e_n \subseteq \omega$ are the finite sets coded by the bits of n. The lemmas below are the bit-arithmetic used to treat membership and application as r.e. relations.

Theorem (`lt_two_pow_of_high_bits`). If every bit of n in position k or higher is off, then $n < 2^k$.

Theorem (`bits_subset_lt_two_pow`). If $e_n \subseteq e_b$, then $n < 2^{b+1}$.

Theorem (`eSubset_e_iff`). $e_n \subseteq e_b$ if and only if for every position $k < n$, the bit of n at k is off or the bit of b at k is on.

Theorem (`eSubset_funOf_e_iff`). $e_k \subseteq e_a(e_b)$ if and only if for every position $i < k$, the bit of k at i is off or i lies in the application $e_a(e_b)$.

Theorem (`eSubset_iff_stage`). Suppose the code c returns 0 on input k exactly when $k \in x$. Then $e_n \subseteq x$ if and only if there is a stage s such that, for every position $k < n$, the bit of n at k is off or c has halted on k by stage s.

Theorem (`e_subset_ofNat_iff`). $e_{\mathrm{code}} \subseteq \{n\}$ if and only if $\mathrm{code} = 0$ or $\mathrm{code} = 2^n$.

eSubset.lean

```
module

public import Mathlib.Computability.RE
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
```

```
public import DomainTheory.DataTypesAsLattices.Graph.Basic.notation3
public import DomainTheory.DataTypesAsLattices.Lambda.Language

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

open Encodable
open Nat.Partrec (Code)
open Nat.Partrec.Code

theorem lt_two_pow_of_high_bits {n k : ℕ}
    (h : ∀ j, k ≤ j → n.testBit j = false) : n < 2 ^ k := by
  induction n using Nat.binaryRec generalizing k with
  | zero => simp
  | bit b n ih =>
    cases k with
    | zero =>
      have hb : b = false := by
        simpa [Nat.testBit_bit_zero] using h 0 le_rfl
      have hn0 : n = 0 := Nat.zero_of_testBit_eq_false fun j => by
        simpa [Nat.testBit_bit_succ] using h (j + 1) (Nat.zero_le (j + 1))
      simp [hb, hn0]
    | succ k =>
      have : n < 2 ^ k := ih fun j hj => by
        simpa [Nat.testBit_bit_succ] using h (j + 1) (Nat.succ_le_succ hj)
      exact Nat.bit_lt_two_pow_succ_iff.mpr this

open Encodable
open Nat.Partrec (Code)
open Nat.Partrec.Code

theorem bits_subset_lt_two_pow {n b : ℕ} (h : e n ⊆ e b) : n < 2 ^ (b + 1) :=
  lt_two_pow_of_high_bits fun _j hj =>
    Bool.eq_false_iff.2 fun hbit =>
      Nat.not_le.mpr hj (e.mem_le (h (e.mem.mpr hbit)))

open Encodable
open Nat.Partrec (Code)
open Nat.Partrec.Code

theorem eSubset_e_iff (n b : ℕ) :
    e n ⊆ e b ↔ ∀ k < n, n.testBit k = false ∨ b.testBit k = true := by
  constructor
  · intro h k hk
    by_cases hb : n.testBit k = true
    · exact Or.inr (e.mem.mp (h (e.mem.mpr hb)))
    · exact Or.inl (Bool.eq_false_iff.mpr hb)
  · intro h k hk
    have hlt : k < n := e.mem_lt hk
    exact e.mem.mpr ((h k hlt).resolve_left fun hf =>
      Bool.eq_false_iff.mp hf (e.mem.mp hk))

open Encodable
```

```
open Nat.Partrec (Code)
open Nat.Partrec.Code

theorem eSubset_funOf_e_iff (k a b : ℕ) :
    e k ⊆ e a ? e b ↔
      ∀ i < k, k.testBit i = false ∨ i ∈ e a ? e b := by
  constructor
  · intro h i hi
    by_cases hb : k.testBit i = true
    · exact Or.inr (h (e.mem.mpr hb))
    · exact Or.inl (Bool.eq_false_iff.mpr hb)
  · intro h i hi
    have hlt : i < k := e.mem_lt hi
    exact (h i hlt).resolve_left fun hf =>
      Bool.eq_false_iff.mp hf (e.mem.mp hi)

open Encodable
open Nat.Partrec (Code)
open Nat.Partrec.Code

theorem eSubset_iff_stage {x : Pomega} {c : Code}
    (hc : Code.eval c = fun k => Part.assert (k ∈ x) fun _ => Part.some (0 : ℕ))
    (n : ℕ) :
    e n ⊆ x ↔ ∃ s, ∀ k < n, n.testBit k = false ∨ (evaln s c k).isSome = true := by
  constructor
  · intro hsub
    let stage : ℕ → ℕ := fun k =>
      if h : n.testBit k = true then
        ((evaln_complete (x := 0)).1 (by
          rw [hc]
          exact Part.mem_assert_iff.mpr ⟨hsub (e.mem.mpr h), Part.mem_some_iff.mpr rfl⟩
    )).choose
      else 0
    refine ⟨(Finset.range n).sup stage, fun k hlt => ?_⟩
    by_cases hb : n.testBit k = true
    · refine Or.inr ?_
      have hle : stage k ≤ (Finset.range n).sup stage :=
        Finset.le_sup (Finset.mem_range.mpr hlt)
      have h0 : 0 ∈ evaln (stage k) c k := by
        simp only [stage, hb, ↓reduceDIte]
        exact ((evaln_complete (x := 0)).1 (by
          rw [hc]
          exact Part.mem_assert_iff.mpr ⟨hsub (e.mem.mpr hb), Part.mem_some_iff.mpr rfl
    ⟩)).choose_spec
      exact (Option.isSome_of_mem (evaln_mono hle h0))
    · exact Or.inl (Bool.eq_false_iff.mpr hb)
  · intro ⟨s, hs⟩ k hk
    have hlt : k < n := e.mem_lt hk
    have hsome : (evaln s c k).isSome = true :=
      (hs k hlt).resolve_left fun hfalse => Bool.eq_false_iff.mp hfalse (e.mem.mp hk)
    obtain ⟨val, hval⟩ := Option.isSome_iff_exists.mp hsome
    have : val ∈ Code.eval c k :=
      evaln_sound (by simpa [Option.mem_def] using hval)
    have : val ∈ (Part.assert (k ∈ x) fun _ => Part.some (0 : ℕ)) := by
      simpa [hc] using this
    exact (Part.mem_assert_iff.mp this).1
```

```
theorem e_subset_ofNat_iff (code n : ℕ) :
    e code ⊆ ofNat n ↔ code = 0 ∨ code = 2 ^ n := by
  constructor
  · intro h
    by_cases hz : code = 0
    · exact Or.inl hz
    · have hbit : ∀ k, code.testBit k = true → k = n := by
        intro k hk
        simpa [ofNat] using h (e.mem.mpr hk)
      have hn : code.testBit n = true := by
        have hk : code.testBit code.log2 = true := Nat.testBit_log2 hz
        simpa [hbit _ hk] using hk
      refine Or.inr (Nat.eq_of_testBit_eq fun k => ?_)
      by_cases hk : k = n
      · subst hk
        simp [hn]
      · have hfalse : code.testBit k = false :=
          Bool.eq_false_iff.mpr fun hb => hk (hbit k hb)
        simp [hfalse, Ne.symm hk]
  · intro h
    rcases h with rfl | rfl
    · intro k hk
      simp [e.zero] at hk
    · intro k hk
      simpa [e.pow2, ofNat] using hk

end DomainTheory.DataTypesAsLattices
```

Pairing terms ✓ Integer pairing and its inverse are written as LAMBDA terms in addition, multiplication, subtraction, square root, and the order test. Write $s = \lfloor \sqrt{n} \rfloor$ and $k = n - s^2$. Mathlib's $\mathrm{Nat.unpair}\, n$ is the pair of components recovered from s and k.

Definition (`pairTerm`). With addition, multiplication, and subtraction supplied, this term applied to the numerals n and m denotes the numeral $\mathrm{Nat.pair}\, n\, m$.

Definition (`unpairSqrtTerm`). Square root applied to the input: the term for s.

Definition (`unpairSquareTerm`). The product of that value with itself: the term for s^2.

Definition (`unpairDeltaTerm`). The input minus that square: the term for k.

Definition (`unpairTestTerm`). The comparison of $k + 1$ with s: the term for the test $k < s$.

Definition (`unpairFstTerm`). The conditional on that test which selects s or k. Interpreted with square root, subtraction, multiplication, and $\leq$, it denotes the first component of $\mathrm{Nat.unpair}\, n$.

Definition (`unpairSndTerm`). The conditional on the same test which selects either $k - s$ or s. In the same interpretation it denotes the second component of $\mathrm{Nat.unpair}\, n$.

`pairTerm.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Lambda.Language
@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
def pairTerm : Term :=
  .lam 3 (.lam 4
    (.cond (.app (.app (.var 2) (.var 4)) (.var 3))
      (.app (.app (.var 0)
          (.app (.app (.var 0)
              (.app (.app (.var 1) (.var 3)) (.var 3)))
            (.var 3)))
        (.var 4))
      (.app (.app (.var 0)
          (.app (.app (.var 1) (.var 4)) (.var 4)))
        (.var 3))))

def unpairSqrtTerm : Term := .app (.var 1) (.var 0)

def unpairSquareTerm : Term :=
  .app (.app (.var 3) unpairSqrtTerm) unpairSqrtTerm

def unpairDeltaTerm : Term :=
  .app (.app (.var 2) (.var 0)) unpairSquareTerm

def unpairTestTerm : Term :=
  .app (.app (.var 4) (.succ unpairDeltaTerm)) unpairSqrtTerm

def unpairFstTerm : Term :=
  .lam 0 (.cond unpairTestTerm unpairSqrtTerm unpairDeltaTerm)

def unpairSndTerm : Term :=
  .lam 0 (.cond unpairTestTerm
    (.app (.app (.var 2) unpairDeltaTerm) unpairSqrtTerm)
    unpairSqrtTerm)

end DomainTheory.DataTypesAsLattices
```

Constant graph ✓ A continuous function is computable when membership in its graph is r.e. The constant finite sets are the first case.

Theorem (`mem_graph_const_iff`). m lies in the graph of the constant function with value e_n if and only if m is a code for a pair (a, b) and the bit of n at position b is on. Equivalently, $b \in e_n$.

mem_graph_const_iff.lean

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph
public import Mathlib.Data.Nat.Pairing
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Attr.Core
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices
```

```
theorem mem_graph_const_iff (n m : ℕ) :
    m ∈ graph (fun _ => e n) ↔
      ∃ t, m = pair (Nat.unpair t).1 (Nat.unpair t).2 ∧
        n.testBit (Nat.unpair t).2 = true := by
  constructor
  · intro ⟨a, b, hm, hb⟩
    exact ⟨Nat.pair a b, by simp [Nat.unpair_pair, hm],
      by simp [Nat.unpair_pair, e.mem.mp hb]⟩
  · intro ⟨t, ht, hb⟩
    exact ⟨(Nat.unpair t).1, (Nat.unpair t).2, ht, e.mem.mpr hb⟩

end DomainTheory.DataTypesAsLattices
```

Code enumerator ✓ A nonempty r.e. set is the range of a primitive recursive function. The enumerator below reads a code and a stage.

Definition (`enumFun`). Let t code a pair (i, s). Then $\mathrm{enumFun}\, c\, t$ is $i + 1$ when the code c has halted on input i by stage s, and is 0 otherwise.

`enumFun.lean`

```
module

public import Mathlib.Computability.PartrecCode
@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

open Nat.Partrec Code

def enumFun (c : Code) (t : ℕ) : ℕ :=
  bif (evaln t.unpair.2 c t.unpair.1).isSome
    then t.unpair.1 + 1
    else 0

end DomainTheory.DataTypesAsLattices
```

Theorem 2.6: Definability ✓ **THEOREM 2.6 (The definability theorem).** *For a k-ary continuous function f, the following are equivalent:*

(i) f is computable;

(ii) $\lambda x_0 \lambda x_1 \cdots \lambda x_{k-1}.\, f(x_0)(x_1)\cdots(x_{k-1})$ as a set is r.e.;

(iii) $\lambda x_0 \lambda x_1 \cdots \lambda x_{k-1}.\, f(x_0)(x_1)\cdots(x_{k-1})$ is LAMBDA-definable.

Proof of Theorem 2.6. In case of a function of several variables, we remark:

$$\lambda x_0 \lambda x_1 \cdots \lambda x_{k-1}.\, f(x_0)(x_1)\cdots(x_{k-1})$$

$$= \{(n_0, (n_1, (\cdots, (n_{k-1}, m)\cdots))) \mid m \in f(e_{n_0})(e_{n_1})\cdots(e_{n_{k-1}})\}.$$

This makes the implication from (i) to (ii) obvious. Conversely, if a graph u is r.e., then from the definition of application we have:

$$m \in u(e_{n_0})(e_{n_1}) \cdots (e_{n_{k-1}}) \quad \text{iff} \quad (n_0, (n_1, (\cdots, (n_{k-1}, m) \cdots))) \in u,$$

which is r.e. in $m, n_0, n_1, \ldots, n_{k-1}$. Therefore (i) and (ii) are equivalent.

We have already proved that (ii) implies (iii). For the converse we have only to show that all LAMBDA-definable sets are r.e. For this argument we could take advantage of the combinator theorem, (Theorem 2.4). Each of the six combinators are r.e., and there is no problem of showing that if u and x are r.e., then so is $u(x)$; because it is defined in such an elementary way with existential and bounded universal number quantifiers and with membership in u and in x occurring positively. Explicitly we have:

$$m \in u(x) \quad \text{iff} \quad \exists e_n \subseteq x.\, (n, m) \in u$$

$$\text{iff} \quad \exists n\, \forall m < n\, [[m \in e_n \text{ implies } m \in x] \text{ and } (n, m) \in u].$$

As a hint for the proof we may note that the method of (2.27) shows that all primitive recursive functions p have the corresponding $\hat{p}$ LAMBDA-definable. Next we remark that a nonempty r.e. set is the range of a primitive recursive function; but the range of p is $\hat{p}(\top)$, which is clearly LAMBDA-definable. That any LAMBDA-definable set (graph) is r.e. is obvious from the definition of the language itself. More details are given in the Appendix.

We may draw some interesting conclusions from the definability theorem. In the first place, we see that the countable collection $\mathbf{RE} \subseteq \mathbf{P}\omega$ of r.e. sets is closed under application and LAMBDA-definability. Indeed it forms a model for the λ-calculus (axioms (α), (β), and (ξ^*) at least) and it also contains the arithmetical combinators. (Clearly there will be many intermediate submodels.) In the second place, we can see now how very easy it is to interpret λ-calculus in ordinary arithmetical recursion theory by means of quite elementary operations on r.e. sets. Thus the equivalence of λ-definability with partial recursiveness seems not to be all that good a piece of evidence for Church's Thesis. In his 1936 paper (a footnote on p. 346) Church says about λ-definability:

> The fact, however, that two such widely different and (in the opinion of the author) equally natural definitions of effective calculability turn out to be equivalent adds to the strength of the reasons adduced below for believing that they constitute as general a characterization of this notion as is consistent with the usual intuitive understanding of it.

The point never struck the present author as an especially telling one, and the reduction of λ-calculus to r.e. theory shows that the divergence between the theories is not at all wide. Of course it is a pleasant surprise to see how many complicated things can be defined in pure λ-calculus (without arithmetical combinators), but this fact cuts the wrong way as evidence for the thesis (we want stronger theories, not weaker ones). Post systems (or even first-order theories) are much better to mention in this connection, since they are obviously more inclusive in giving enumerations than Turing machines or Herbrand–Gödel recursion equations. But the equivalence proofs are all so easy! What one would like to see is a "natural" definition where the equivalence with r.e. is not just a mechanical exercise involving a few tricks of coding.

Formalization (`theorem_2_6.lean`).

Theorem (`theorem_2_6`). For a Scott continuous $f : \mathbf{P}\omega \to \mathbf{P}\omega$, the following are equivalent: f is computable; the graph of f is r.e.; the graph of f is combinatory; the graph of f is LAMBDA-definable.

Combinatory and LAMBDA-definable agree for every set, so the last two are equivalent without using continuity of f.

Theorem (`theorem_2_6.fin`). The same four-way equivalence for a Scott continuous function of n variables, with the graph replaced by its curried form `curryFin`.

Theorem (`theorem_2_6.combinatory_zero`). The zero combinator is LAMBDA-definable.

Theorem (`theorem_2_6.lambda_continuous`). The interpretation of any LAMBDA term, with every variable except one held at $\bot$, is Scott continuous in that variable.

Theorem (`theorem_2_6.ofNat_isRE`). If the numeral for n is combinatory, then it is r.e.

theorem_2_6.lean

```
module

public import DomainTheory.DataTypesAsLattices.Lambda.IsCombinatory
public import DomainTheory.DataTypesAsLattices.Computability.IsComputable
public import DomainTheory.DataTypesAsLattices.Computability.LambdaDefinable
public import DomainTheory.DataTypesAsLattices.Computability.ComputableFin

import DomainTheory.DataTypesAsLattices.Computability.IsREu2eiff_combinatory
import DomainTheory.DataTypesAsLattices.Computability.IsREu2enumeral
import DomainTheory.DataTypesAsLattices.Computability.combinatory_isLambdaDefinable
import DomainTheory.DataTypesAsLattices.Lambda.theorem_2_1
import DomainTheory.DataTypesAsLattices.Lambda.theorem_2_4
@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

theorem theorem_2_6 {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    (IsComputable f ↔ IsRE (graph f)) ∧
      (IsRE (graph f) ↔ IsCombinatory (graph f)) ∧
      (LambdaDefinable (graph f) ↔ IsCombinatory (graph f)) := by
  refine ⟨?_, IsRE.iff_combinatory, ?_⟩
  · exact ⟨fun h => h.2, fun h => ⟨hf, h⟩⟩
  · exact ⟨fun h => by
      obtain ⟨t, ht⟩ := h.out
      simpa [ht] using theorem_2_4.closed t,
      combinatory_isLambdaDefinable⟩

namespace theorem_2_6

theorem combinatory_zero : LambdaDefinable zeroC :=
  ⟨⟨Term.zero, rfl⟩⟩

theorem fin {n : ℕ} {f : (Fin n → Pomega) → Pomega}
    (hf : ScottContinuousFin f) :
    (ComputableFin f ↔ IsRE (curryFin f)) ∧
      (IsRE (curryFin f) ↔ IsCombinatory (curryFin f)) ∧
      (LambdaDefinable (curryFin f) ↔ IsCombinatory (curryFin f)) := by
  refine ⟨?_, IsRE.iff_combinatory, ?_⟩
  · exact ⟨fun h => h.out.2, fun h => ⟨⟨hf, h⟩⟩⟩
  · exact ⟨fun h => by
      obtain ⟨t, ht⟩ := h.out
      simpa [ht] using theorem_2_4.closed t,
```

```
      combinatory_isLambdaDefinable⟩

theorem lambda_continuous (t : Term) :
    IsScottContinuous (fun v => interp t (envSet (fun _ => botElem) 0 v)) :=
  theorem_2_1 t (fun _ => botElem) 0

theorem ofNat_isRE (n : ℕ) : IsCombinatory (ofNat n) → IsRE (ofNat n) :=
  fun _ => IsRE.numeral n

end theorem_2_6

end DomainTheory.DataTypesAsLattices
```

2.3.15 A law of Y ✓

In the course of the development in this section we have stated many equations which are not found in Table 1, and which involve new combinators. In conclusion we would like to mention an equation about $\mathbf{Y}$ which holds in the model, which can be stated in pure λ-calculus, and which cannot be proved by ordinary reduction (though we shall not try to justify this last statement here). In order to shorten the calculations, we note from definition (2.8) that $\mathbf{Y}(u) = \mathbf{Y}(\lambda y.\, u(y))$; so by Theorem 2.5 this also equals $u(\mathbf{Y}(u))$.

$$(2.28) \quad \mathbf{Y}(\lambda f \lambda x.\, g(x)(f(x))) = \lambda x.\, \mathbf{Y}(g(x)).$$

Call the left side f' and the right f''. Now $f'' = \lambda x.\, g(x)(\mathbf{Y}(g(x))) = \lambda x.\, g(x)(f''(x))$, thus $f' \subseteq f''$, because f' is a least fixed point. On the other hand $f' = \lambda x.\, g(x)(f'(x))$, so $f'(x) = g(x)(f'(x))$. Thus $f''(x) \subseteq f'(x)$, because $f''(x)$ is a least fixed point. As this holds for all x, we see that $f'' \subseteq f'$; and so they are equal. There must be many other such equations.

eq_2_28.lean

```
module

public import DomainTheory.DataTypesAsLattices.Lambda.Ymap
public import DomainTheory.DataTypesAsLattices.Lambda.Fofg

import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_3
import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_4
import DomainTheory.DataTypesAsLattices.Graph.beta
import DomainTheory.DataTypesAsLattices.Lambda.graph_const_isScottContinuous
import DomainTheory.DataTypesAsLattices.Lambda.id_isScottContinuous

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem eq_2_28 {g : Pomega → Pomega → Pomega}
    (hgx : ∀ y, IsScottContinuous (fun x => g x y))
    (hgy : ∀ x, IsScottContinuous (fun y => g x y)) :
    fix (Fofg g) = Ymap g := by
  have hF : IsScottContinuous (Fofg g) :=
    graph_const_isScottContinuous (fun f x => g x (funOf f x))
      (fun x => theorem_1_3 (hgy x) (funOf.isScottContinuous_left x))
  have hfix : Fofg g (Ymap g) = Ymap g := by
```

```
    apply congrArg graph
    funext x
    rw [Ymap.app hgx hgy]
    exact (theorem_1_4 (hgy x)).1
  have hle : fix (Fofg g) ⊆ Ymap g := (theorem_1_4 hF).2 (Ymap g) hfix
  refine subset_antisymm hle ?_
  have hiter : ∀ n x, funOf (iterateBot (Fofg g) n) x = iterateBot (g x) n := by
    intro n
    induction n with
    | zero =>
      intro x
      ext m
      simp [iterateBot, funOf, botElem]
    | succ n ih =>
      intro x
      have hcont : IsScottContinuous
          (fun z => g z (funOf (iterateBot (Fofg g) n) z)) :=
        theorem_1_3.tuple hgx hgy id_isScottContinuous
          (funOf.isScottContinuous (iterateBot (Fofg g) n))
      change funOf (lam (fun z => g z (funOf (iterateBot (Fofg g) n) z))) x =
        g x (iterateBot (g x) n)
      rw [beta hcont, ih]
  intro p hp
  rcases hp with ⟨n, m, rfl, hm⟩
  obtain ⟨k, hkm⟩ := Set.mem_iUnion.mp hm
  cases k with
  | zero =>
    simp [iterateBot, botElem] at hkm
  | succ k =>
    have : pair n m ∈ iterateBot (Fofg g) (k + 1) :=
      ⟨n, m, rfl, by
        change m ∈ g (e n) (funOf (iterateBot (Fofg g) k) (e n))
        rw [hiter]
        exact hkm⟩
    exact Set.mem_iUnion.mpr ⟨k + 1, this⟩

end DomainTheory.DataTypesAsLattices
```

2.4 Enumeration and degrees

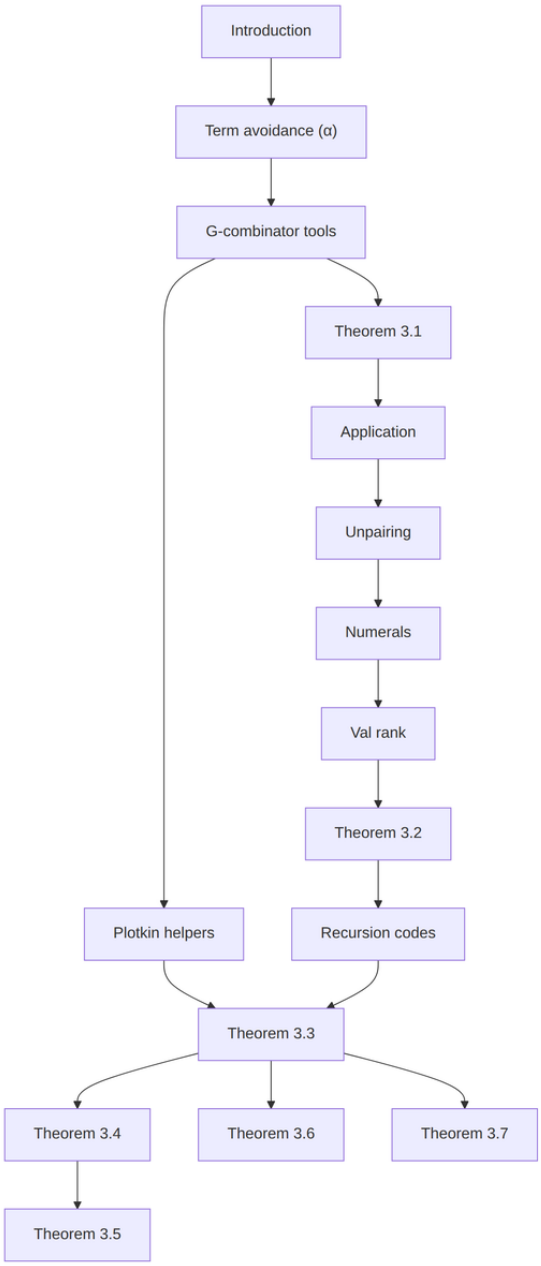

Figure 30: Enumeration and degrees.

2.4.1 Introduction ✓

Reduction to a few combinators is old in combinatory logic. The device special to this model is (3.1), which folds the arithmetical combinators into the one combinator $\mathbf{G}$. The Gödel numbering and the second recursion theorem are the standard constructions, written so that arithmetic and the type-free combinators

share a notation, and the incompleteness theorem is the standard one in that notation. Theorem 3.5 is the argument of Myhill and Shepherdson (1955); Martin Hyland pointed out the connection. Theorem 3.6 restates enumeration degrees, as in Rogers (1967), Sasso (1975), and Gutteridge (1971). Scott notes that this area was underdeveloped beside the theory of Turing degrees. Semigroups of combinators had been discussed by Church and by Böhm, and Theorem 3.7 reads that discussion inside $\mathbf{RE} \cap \mathbf{FUN}$.

A great advantage of the combinators from the formal point of view is that (bound) variables are eliminated in favor of "algebraic" combinations. The disadvantage is that the algebra is not all that pretty, as the combinations tend to get rather long and general laws are rather few. Nevertheless as a technical device it is mildly remarkable that we can have a notation for all r.e. sets requiring so few primitives. In the model defined here the reduction to one combinator rests on a lemma about conditionals:

$$(3.1) \quad \mathbf{cond}(x)(y)(\mathbf{cond}(x)(y)) = y.$$

Recall that $\mathbf{cond}$ (or $\supset$) is a test for zero, so that:

$$(3.2) \quad \mathbf{cond}(x)(y)(0) = x.$$

This suggests that we lump all combinators of Theorem 2.4 into this one:

$$(3.3) \quad \mathbf{G} = \mathbf{cond}(\langle \mathbf{suc}, \mathbf{pred}, \mathbf{cond}, \mathbf{K}, \mathbf{S} \rangle)(0).$$

We can then readily prove Theorem 3.1 below.
(Already included: `1976_Avoids.md`.)

2.4.2 G-combinator tools ✓

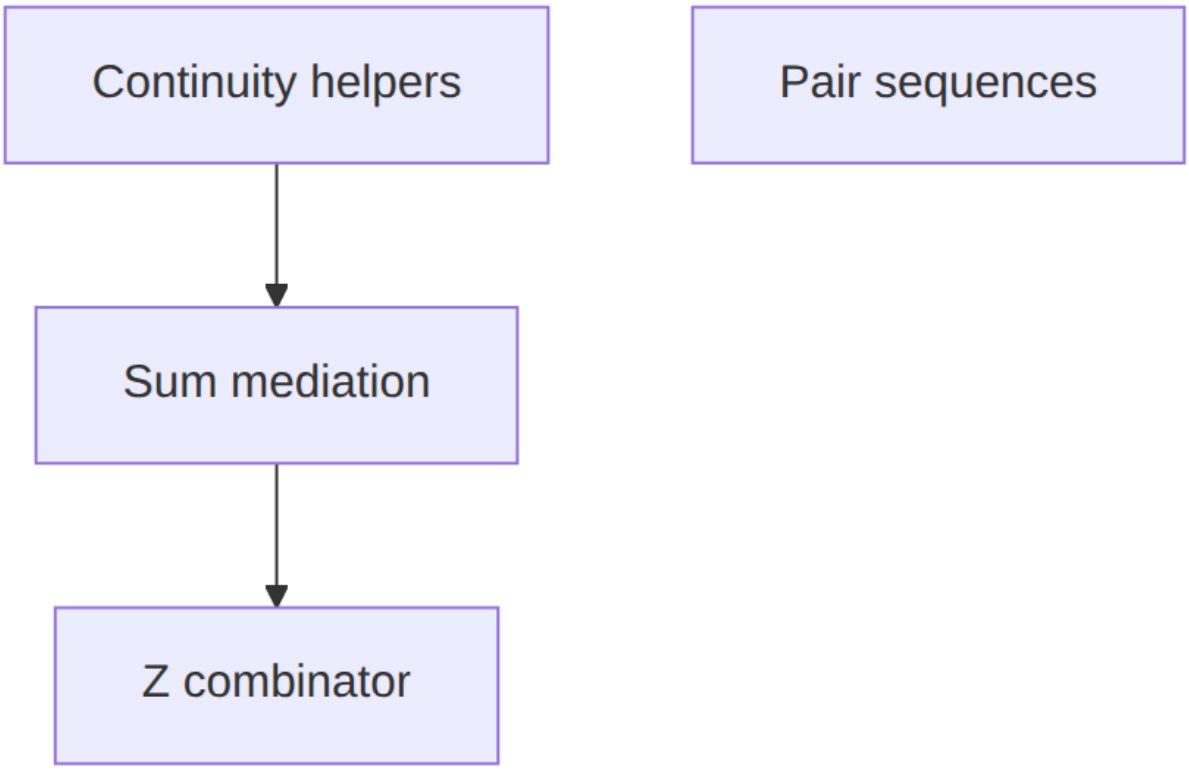

Figure 31: G-combinator tools ✓.

Continuity helpers ✓ Scott-continuity lemmas for diagonal and multi-argument composition.

Theorem (`ContinuityHelpers.on_diag`). If a binary map F is Scott-continuous in each argument separately, then $x \mapsto F(x, x)$ is Scott-continuous.

Proof. The diagonal substitution theorem identifies membership in $F(x, x)$ with a Scott-union over basic approximations $e_n \subseteq x$; translating that union into the Scott-union characterisation of continuity gives the claim. ■

Theorem (`ContinuityHelpers.tuple`). If F is Scott-continuous in each argument and g, h are Scott-continuous, then $x \mapsto F(g(x), h(x))$ is Scott-continuous.

Proof. Reduce to the diagonal case by fixing one composed argument and using substitution continuity of F along g or h. ■

Theorem (`ContinuityHelpers.nary`). If a ternary map F is Scott-continuous in each argument and g, h, i are Scott-continuous, then $x \mapsto F(g(x), h(x), i(x))$ is Scott-continuous.

Proof. Apply the tuple lemma in the first two slots with the third argument held by i, then close under diagonal continuity with substitution along i. ■

`ContinuityHelpers.lean`

```
module
```

```
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_3
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
public import DomainTheory.DataTypesAsLattices.Pomega.eDense

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace ContinuityHelpers

theorem on_diag {F : Pomega → Pomega → Pomega}
    (h1 : ∀ y, IsScottContinuous (fun x => F x y))
    (h2 : ∀ x, IsScottContinuous (fun y => F x y)) :
    IsScottContinuous (fun x => F x x) := by
  constructor
  intro x
  have H := theorem_1_3.diag (x := x) (f := F) h1 h2
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ F (e n) (e n)} := by rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ F (e n) (e n)} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

theorem tuple {F : Pomega → Pomega → Pomega}
    (h1 : ∀ y, IsScottContinuous (fun x => F x y))
    (h2 : ∀ x, IsScottContinuous (fun y => F x y))
    {g h : Pomega → Pomega} (hg : IsScottContinuous g) (hh : IsScottContinuous h) :
    IsScottContinuous (fun x => F (g x) (h x)) :=
  on_diag
    (fun v => theorem_1_3 (h1 (h v)) hg)
    (fun u => theorem_1_3 (h2 (g u)) hh)

theorem nary {F : Pomega → Pomega → Pomega → Pomega}
    (hf0 : ∀ y z, IsScottContinuous (fun x => F x y z))
    (hf1 : ∀ x z, IsScottContinuous (fun y => F x y z))
    (hf2 : ∀ x y, IsScottContinuous (fun z => F x y z))
    {g h i : Pomega → Pomega}
    (hg : IsScottContinuous g) (hh : IsScottContinuous h) (hi : IsScottContinuous i) :
    IsScottContinuous (fun x => F (g x) (h x) (i x)) :=
  on_diag
    (fun v => tuple (fun y => hf0 y (i v)) (fun x => hf1 x (i v)) hg hh)
    (fun u => theorem_1_3 (hf2 (g u) (h u)) hi)

end ContinuityHelpers

end DomainTheory.DataTypesAsLattices
```

Pair sequences ✓ Projection, injectivity, and Scott continuity for the binary pairing sequence.

Theorem (`PairSeq.app_zero`). $\mathrm{pairSeq}(x, y)\, 0 = x$.

Proof. The zero clause of the underlying length-two sequence. ■

Theorem (`PairSeq.app_one`). $\mathrm{pairSeq}(x, y)\, 1 = y$.

Proof. The one clause of the underlying length-two sequence. ■

Theorem (`PairSeq.inj`). If $\mathrm{pairSeq}(x, y) = \mathrm{pairSeq}(x', y')$, then $x = x'$ and $y = y'$.

Proof. Apply the zero and one projections to both sides. ■

Theorem (`PairSeq.isScottContinuous_left`). For fixed y, the map $x \mapsto \mathrm{pairSeq}(x, y)$ is Scott-continuous.

Proof. Graph-constant continuity along the mid-argument continuity of the conditional packing that defines the sequence. ■

Theorem (`PairSeq.isScottContinuous_right`). For fixed x, the map $y \mapsto \mathrm{pairSeq}(x, y)$ is Scott-continuous.

Proof. Graph-constant continuity using continuity of the conditional in the right and mid slots. ■

`PairSeq.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.pairSeq
import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_3
import DomainTheory.DataTypesAsLattices.Lambda.graph_const_isScottContinuous

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace PairSeq

theorem app_zero (x y : Pomega) : funOf (pairSeq x y) (ofNat 0) = x :=
  seq2.zero x y

theorem app_one (x y : Pomega) : funOf (pairSeq x y) (ofNat 1) = y :=
  seq2.one x y

theorem inj {x y x' y' : Pomega} (h : pairSeq x y = pairSeq x' y') :
    x = x' ∧ y = y' := by
  constructor
  · have := congrArg (fun w => funOf w (ofNat 0)) h
    rw [app_zero, app_zero] at this
    exact this
  · have := congrArg (fun w => funOf w (ofNat 1)) h
    rw [app_one, app_one] at this
    exact this

theorem isScottContinuous_left (y : Pomega) :
    IsScottContinuous (fun x => pairSeq x y) :=
  graph_const_isScottContinuous
    (fun x z => condSet z x (condSet (predSet z) y botElem))
    (fun z => condSet.isScottContinuous_mid z _)

theorem isScottContinuous_right (x : Pomega) :
    IsScottContinuous (fun y => pairSeq x y) :=
```

```
  graph_const_isScottContinuous
    (fun y z => condSet z x (condSet (predSet z) y botElem))
    (fun z =>
      theorem_1_3 (condSet.isScottContinuous_right z x)
        (condSet.isScottContinuous_mid (predSet z) botElem))

end PairSeq

end DomainTheory.DataTypesAsLattices
```

Sum mediation ✓ Tag successor σ_j and the mediating map out of a binary sum.

Definition (`sigmaJ`). $\sigma_j(x) = \{(j, k+1) \mid (j,k) \in x\}$.

Theorem (`sigmaJ.isScottContinuous`). Each σ_j is Scott-continuous.

Proof. A coded successor tag pulls a basic approximation containing the predecessor tag; conversely a Scott-union witness unpacks to such a predecessor. ■

Theorem (`sigmaJ.app`). $\mathrm{graph}(\sigma_j)\, x = \sigma_j(x)$.

Proof. The continuous-graph β-law. ■

Theorem (`sigmaJ.bot`). $\sigma_j(\bot) = \bot$.

Proof. The empty set contributes no tagged pairs. ■

Theorem (`sigmaJ.of_no_tag`). If u contains no pair with left tag j, then $\sigma_j(u) = \bot$.

Proof. Every member of $\sigma_j(u)$ would require such a predecessor tag. ■

Theorem (`sigmaJ.pair_union`). If $j \neq j'$, then $\sigma_j\big(\{(j,m)\} \cup \{(j',m)\}\big) = \{(j, m+1)\}$.

Proof. Only the matching tag survives; the other tag is excluded by distinctness. ■

Theorem (`sigmaJ.succ_ne`). If $j \neq j'$, then $\sigma_j(\{(j',m)\}) = \bot$.

Proof. A membership would force the tags equal. ■

Theorem (`sigmaJ.succ_singleton`). $\sigma_j(\{(j,m)\}) = \{(j, m+1)\}$.

Proof. Direct unpacking of the single tagged pair. ■

Theorem (`sigmaJ.union_fresh`). If u has no j-tag, then $\sigma_j\big(u \cup \{(j,m)\}\big) = \{(j, m+1)\}$.

Proof. Reorder the union and apply the singleton and no-tag cases. ■

Definition (`sumMed`). $\mathrm{sumMed}(f, g)$ is the graph of

$$u \mapsto \begin{cases} f(u_1) & \text{if } u_0 = 0, \\ g(u_1) & \text{otherwise,} \end{cases}$$

via the strict conditional on the zero and one projections of u.

Theorem (`sumMed.body_isScottContinuous`). That body map in u is Scott-continuous for fixed f and g.

Proof. Ternary continuity of the conditional along continuous projections and applications of f and g. ■

Theorem (`sumMed.app`). Applying $\mathrm{sumMed}(f, g)$ recovers the conditional body.

Proof. The β-law for the continuous body. ■

Theorem (`sumMed.app_inl`). $\mathrm{sumMed}(f, g)\, \langle 0, x\rangle = f(x)$.

Proof. Unfold application and the left injection projections. ■

Theorem (`sumMed.app_inr`). $\mathrm{sumMed}(f, g)\, \langle 1, x\rangle = g(x)$.

Proof. Symmetric with the right injection. ■

Theorem (`sumMed.isGraph`). $\mathrm{sumMed}(f, g)$ equals the graph of its own application.

Proof. Pointwise graph extension from $\mathrm{sumMed.app}$. ■

Theorem (`sumMed.rel`). If $f : A \to C$ and $g : B \to C$ as morphisms of restricted equivalences, then $\mathrm{sumMed}(f, g) : A + B \to C$.

Proof. Related sum elements are left or right injections; reduce via $\mathrm{sumMed.app_inl}$ or $\mathrm{sumMed.app_inr}$ to the assumed relatedness of f or g. ■

Theorem (`sumMed.rel_unique`). Any $h : A + B \to C$ that agrees with f on left injections and with g on right injections is related (as an arrow) to $\mathrm{sumMed}(f, g)$.

Proof. On related sum elements, rewrite h along the injection form and compare to the mediating applications of f or g. ■

SumMed.lean

```
module

public import DomainTheory.DataTypesAsLattices.Functionality.RestrictedEquiv
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Enumeration.ContinuityHelpers
import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_3
import DomainTheory.DataTypesAsLattices.Graph.beta
import DomainTheory.DataTypesAsLattices.Graph.theorem_1_2
import DomainTheory.DataTypesAsLattices.Retracts.graphLemmas

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def sigmaJ (j : ℕ) (x : Pomega) : Pomega :=
  {p | ∃ k, pair j (k + 1) = p ∧ pair j k ∈ x}

namespace sigmaJ

theorem isScottContinuous (j : ℕ) : IsScottContinuous (sigmaJ j) := by
  constructor
  intro x
  ext p
  constructor
  · intro ⟨k, heq, hp⟩
    refine mem_scottUnion.mpr ⟨2 ^ pair j k, ?_, k, heq, ?_⟩
    · simpa [e.pow2, Set.singleton_subset_iff] using hp
    · simp [e.pow2]
  · intro hp
    obtain ⟨n, hn, k, heq, hpk⟩ := mem_scottUnion.mp hp
    exact ⟨k, heq, hn hpk⟩

theorem app (j : ℕ) (x : Pomega) :
    funOf (graph (sigmaJ j)) x = sigmaJ j x := by
  simpa using congrArg (fun g => g x) (theorem_1_2.i (isScottContinuous j))

theorem bot (j : ℕ) : sigmaJ j botElem = botElem := by
  ext p
  simp [sigmaJ, botElem]

theorem of_no_tag {j : ℕ} {u : Pomega}
    (hu : ∀ k, pair j k ∈ u) :
```

```
    sigmaJ j u = botElem := by
  ext p
  constructor
  · intro ⟨k, _hp, hk⟩
    exact (hu k hk).elim
  · simp [botElem]

theorem pair_union (j j' m : ℕ) (hne : j = j') :
    sigmaJ j (({pair j m} : Pomega) ∪ {pair j' m}) =
      ({pair j (m + 1)} : Pomega) := by
  ext p
  constructor
  · intro ⟨k, hp, hk⟩
    rcases hk with hk | hk
    · have hkm : k = m := (pair_inj hk).2
      subst k
      simpa using hp.symm
    · have hj : j = j' := (pair_inj hk).1
      exact (hne hj).elim
  · intro hp
    exact ⟨m, hp.symm, Or.inl (by simp)⟩

theorem succ_ne (j j' m : ℕ) (hne : j = j') :
    sigmaJ j {pair j' m} = botElem := by
  ext p
  constructor
  · intro ⟨k, _hk, hp⟩
    have : pair j k = pair j' m := by
      simpa [Set.mem_singleton_iff] using hp
    exact (hne (pair_inj this).1).elim
  · intro hp
    simp [botElem] at hp

theorem succ_singleton (j m : ℕ) :
    sigmaJ j {pair j m} = ({pair j (m + 1)} : Pomega) := by
  ext p
  constructor
  · intro ⟨k, heq, hp⟩
    have : k = m := (pair_inj hp).2
    subst this
    simp [heq]
  · intro hp
    exact ⟨m, hp.symm, by simp⟩

theorem union_fresh {j m : ℕ} {u : Pomega}
    (hu : ∀ k, pair j k ∈ u) :
    sigmaJ j (u ∪ {pair j m}) = ({pair j (m + 1)} : Pomega) := by
  rw [show u ∪ {pair j m} = ({pair j m} : Pomega) ∪ u by
    exact Set.union_comm _ _]
  ext p
  constructor
  · intro ⟨k, hp, hk⟩
    rcases hk with hk | hk
    · have hkm : k = m := (pair_inj hk).2
      subst k
      simpa using hp.symm
```

```
    · exact (hu k hk).elim
  · intro hp
    exact ⟨m, hp.symm, Or.inl (by simp)⟩

end sigmaJ

def sumMed (f g : Pomega) : Pomega :=
  graph (fun u =>
    condSet (funOf u (ofNat 0))
      (funOf f (funOf u (ofNat 1)))
      (funOf g (funOf u (ofNat 1))))

namespace sumMed

theorem body_isScottContinuous (f g : Pomega) :
    IsScottContinuous (fun u =>
      condSet (funOf u (ofNat 0))
        (funOf f (funOf u (ofNat 1)))
        (funOf g (funOf u (ofNat 1)))) :=
  ContinuityHelpers.nary
    (fun y z => condSet.isScottContinuous_left y z)
    (fun x z => condSet.isScottContinuous_mid x z)
    (fun x y => condSet.isScottContinuous_right x y)
    (funOf.isScottContinuous_left (ofNat 0))
    (theorem_1_3 (funOf.isScottContinuous f)
      (funOf.isScottContinuous_left (ofNat 1)))
    (theorem_1_3 (funOf.isScottContinuous g)
      (funOf.isScottContinuous_left (ofNat 1)))

theorem app (f g u : Pomega) :
    funOf (sumMed f g) u =
      condSet (funOf u (ofNat 0))
        (funOf f (funOf u (ofNat 1)))
        (funOf g (funOf u (ofNat 1))) :=
  beta (sumMed.body_isScottContinuous f g) u

theorem app_inl (f g x : Pomega) :
    funOf (sumMed f g) (pairElem (ofNat 0) x) = funOf f x := by
  rw [sumMed.app, pairElem.fst, pairElem.snd, condSet.ofNat_zero]

theorem app_inr (f g x : Pomega) :
    funOf (sumMed f g) (pairElem (ofNat 1) x) = funOf g x := by
  rw [sumMed.app, pairElem.fst, pairElem.snd, condSet.ofNat_one]

theorem isGraph (f g : Pomega) :
    sumMed f g = graph (fun u => funOf (sumMed f g) u) := by
  apply graph_ext
  intro u
  exact (sumMed.app f g u).symm

theorem rel {A B C : RestrictedEquiv} {f g : Pomega}
    (hf : (arrowE A C).mem f) (hg : (arrowE B C).mem g) :
    (arrowE (sumE A B) C).mem (sumMed f g) := by
  refine ⟨sumMed.isGraph f g, sumMed.isGraph f g, ?_⟩
  intro u v huv
  rcases huv with ⟨hu, hv, hA⟩ | ⟨hu, hv, hB⟩
```

```
  · have hmu : funOf (sumMed f g) u = funOf f (funOf u (ofNat 1)) :=
      (congrArg (fun w => funOf (sumMed f g) w) hu).trans
        (sumMed.app_inl f g _)
    have hmv : funOf (sumMed f g) v = funOf f (funOf v (ofNat 1)) :=
      (congrArg (fun w => funOf (sumMed f g) w) hv).trans
        (sumMed.app_inl f g _)
    rw [hmu, hmv]
    exact hf.2.2 (funOf u (ofNat 1)) (funOf v (ofNat 1)) hA
  · have hmu : funOf (sumMed f g) u = funOf g (funOf u (ofNat 1)) :=
      (congrArg (fun w => funOf (sumMed f g) w) hu).trans
        (sumMed.app_inr f g _)
    have hmv : funOf (sumMed f g) v = funOf g (funOf v (ofNat 1)) :=
      (congrArg (fun w => funOf (sumMed f g) w) hv).trans
        (sumMed.app_inr f g _)
    rw [hmu, hmv]
    exact hg.2.2 (funOf u (ofNat 1)) (funOf v (ofNat 1)) hB

theorem rel_unique {A B C : RestrictedEquiv} {f g h : Pomega}
    (hh : (arrowE (sumE A B) C).mem h)
    (hinl : ∀ x y, A.rel x y →
      C.rel (funOf h (pairElem (ofNat 0) x)) (funOf f y))
    (hinr : ∀ x y, B.rel x y →
      C.rel (funOf h (pairElem (ofNat 1) x)) (funOf g y)) :
    (arrowE (sumE A B) C).rel h (sumMed f g) := by
  refine ⟨hh.1, sumMed.isGraph f g, ?_⟩
  intro u v huv
  rcases huv with ⟨hu, hv, hA⟩ | ⟨hu, hv, hB⟩
  · have hhu :
        funOf h u = funOf h (pairElem (ofNat 0) (funOf u (ofNat 1))) :=
      congrArg (fun w => funOf h w) hu
    have hmv : funOf (sumMed f g) v = funOf f (funOf v (ofNat 1)) :=
      (congrArg (fun w => funOf (sumMed f g) w) hv).trans
        (sumMed.app_inl f g _)
    rw [hhu, hmv]
    exact hinl (funOf u (ofNat 1)) (funOf v (ofNat 1)) hA
  · have hhu :
        funOf h u = funOf h (pairElem (ofNat 1) (funOf u (ofNat 1))) :=
      congrArg (fun w => funOf h w) hu
    have hmv : funOf (sumMed f g) v = funOf g (funOf v (ofNat 1)) :=
      (congrArg (fun w => funOf (sumMed f g) w) hv).trans
        (sumMed.app_inr f g _)
    rw [hhu, hmv]
    exact hinr (funOf u (ofNat 1)) (funOf v (ofNat 1)) hB

end sumMed

end DomainTheory.DataTypesAsLattices
```

Z combinator ✓ Finite iteration of application and its continuous combinator.

Definition (`Z`). For $n \in \mathbb{N}$, a map f, and an argument x,

$$Z(0, f, x) = x, \qquad Z(n+1, f, x) = f\big(Z(n, f, x)\big).$$

Theorem (`Z.rel`). If a restricted equivalence A is preserved by f versus f' on related arguments, and A relates x to y, then A relates $Z(n, f, x)$ to $Z(n, f', y)$.

Proof. Induction on n: the base is the given relatedness of x and y; the step applies the assumed preservation of A by f and f'. ■

Theorem (`Z.finite_bound`). Every member of $Z(m, e_p, e_q)$ is at most $\max(p, q)$.

Proof. Induction on m: the base uses the bound on members of e_q; the step unpacks a coded pair and uses the bound on the left factor from e_p. ■

Theorem (`Z.finite_no_tag`). The tagged pair $(\max(p, q) + 1,\ k)$ does not lie in $Z(m, e_p, e_q)$.

Proof. Any such membership would force $\max(p, q) + 1 \le \max(p, q)$ by the finite bound. ■

Theorem (`Z.graph_funOf`). Iterating the graph of $y \mapsto f(y)$ agrees with iterating f: $Z(n, \mathrm{graph}(y \mapsto f(y)), x) = Z(n, f, x)$.

Proof. Induction on n; the step uses the β-law for the continuous map f. ■

Theorem (`Z.isScottContinuous_left`). For fixed n and x, the map $f \mapsto Z(n, f, x)$ is Scott-continuous.

Proof. Induction on n: the base is a constant map; the step is continuous application of f to a continuous iterate, assembled by the tuple continuity helper. ■

Theorem (`Z.isScottContinuous_right`). For fixed n and f, the map $x \mapsto Z(n, f, x)$ is Scott-continuous.

Proof. Induction on n: the base is the identity; the step composes continuous application of f with the inductive iterate. ■

Definition (`Zcomb`). $\mathrm{Zcomb}(n) = \mathrm{graph}\big(f \mapsto \mathrm{graph}(x \mapsto Z(n, f, x))\big)$.

Theorem (`Zcomb.map_isScottContinuous`). The outer graph map $f \mapsto \mathrm{graph}(x \mapsto Z(n, f, x))$ is Scott-continuous.

Proof. Graph-constant continuity from the left continuity of Z in f. ■

Theorem (`Zcomb.app`). $\mathrm{Zcomb}(n)\ f = \mathrm{graph}(x \mapsto Z(n, f, x))$.

Proof. The β-law for the continuous outer map. ■

Theorem (`Zcomb.app2`). $\mathrm{Zcomb}(n)\ f\ x = Z(n, f, x)$.

Proof. Apply Zcomb.app, then the β-law for the continuous right iterate. ■

Theorem (`Zcomb.isGraph`). $\mathrm{Zcomb}(n)$ equals the graph of $f \mapsto \mathrm{Zcomb}(n)\ f$.

Proof. Pointwise graph extension using Zcomb.app. ■

Theorem (`Zcomb.app_isGraph`). $\mathrm{Zcomb}(n)\ f$ equals the graph of $x \mapsto \mathrm{Zcomb}(n)\ f\ x$.

Proof. From Zcomb.app and the β-law for the right iterate. ■

`Zcomb.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Enumeration.ContinuityHelpers
public import DomainTheory.DataTypesAsLattices.Enumeration.SumMed
import DomainTheory.DataTypesAsLattices.Graph.beta
import DomainTheory.DataTypesAsLattices.Lambda.const_isScottContinuous
import DomainTheory.DataTypesAsLattices.Lambda.graph_const_isScottContinuous
import DomainTheory.DataTypesAsLattices.Lambda.id_isScottContinuous
import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_3
import DomainTheory.DataTypesAsLattices.Retracts.graphLemmas
public import DomainTheory.DataTypesAsLattices.Functionality.RestrictedEquiv
public import DomainTheory.DataTypesAsLattices.Graph.funOf
public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import DomainTheory.DataTypesAsLattices.Pomega.pair
```

```
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def Z : ℕ → Pomega → Pomega → Pomega
  | 0, _, x => x
  | n + 1, f, x => funOf f (Z n f x)

namespace Z

theorem rel (A : RestrictedEquiv) (n : ℕ) {f f' x y : Pomega}
    (hf : ∀ a b, A.rel a b → A.rel (funOf f a) (funOf f' b))
    (hxy : A.rel x y) :
    A.rel (Z n f x) (Z n f' y) := by
  induction n with
  | zero => simpa [Z] using hxy
  | succ n ih =>
    simpa [Z] using hf _ _ ih

theorem finite_bound (p q m : ℕ) :
    ∀ k ∈ Z m (e p) (e q), k ≤ max p q := by
  induction m with
  | zero =>
      intro k hk
      exact (e.mem_le hk).trans (Nat.le_max_right p q)
  | succ m ih =>
      intro k hk
      obtain ⟨r, _hr, hpair⟩ := hk
      exact (pair_le_right r k).trans
        ((e.mem_le hpair).trans (Nat.le_max_left p q))

theorem finite_no_tag (p q m k : ℕ) :
    pair (max p q + 1) k ∈ Z m (e p) (e q) := by
  intro hk
  have hle := Z.finite_bound p q m _ hk
  exact (Nat.not_succ_le_self (max p q))
    ((pair_le_left (max p q + 1) k).trans hle)

theorem graph_funOf (n : ℕ) (f x : Pomega) :
    Z n (graph (fun y => funOf f y)) x = Z n f x := by
  induction n with
  | zero => simp [Z]
  | succ n ih =>
    simp [Z, ih]
    have : funOf (graph (fun y => funOf f y)) (Z n f x) = funOf f (Z n f x) :=
      beta (funOf.isScottContinuous f) (Z n f x)
    exact this

theorem isScottContinuous_left (n : ℕ) (x : Pomega) :
    IsScottContinuous (fun f => Z n f x) := by
  induction n with
  | zero => simpa [Z] using const_isScottContinuous x
  | succ n ih =>
    simpa [Z] using
      ContinuityHelpers.tuple
```

```
        (fun y => funOf.isScottContinuous_left y)
        (fun u => funOf.isScottContinuous u)
        id_isScottContinuous ih

theorem isScottContinuous_right (n : ℕ) (f : Pomega) :
    IsScottContinuous (fun x => Z n f x) := by
  induction n with
  | zero => simpa [Z] using id_isScottContinuous
  | succ n ih =>
    simpa [Z] using theorem_1_3 (funOf.isScottContinuous f) ih

end Z

def Zcomb (n : ℕ) : Pomega :=
  graph (fun f => graph (fun x => Z n f x))

namespace Zcomb

theorem map_isScottContinuous (n : ℕ) :
    IsScottContinuous (fun f => graph (fun x => Z n f x)) :=
  graph_const_isScottContinuous (fun f x => Z n f x)
    (fun x => Z.isScottContinuous_left n x)

theorem app (n : ℕ) (f : Pomega) :
    funOf (Zcomb n) f = graph (fun x => Z n f x) :=
  beta (Zcomb.map_isScottContinuous n) f

theorem app2 (n : ℕ) (f x : Pomega) :
    funOf (funOf (Zcomb n) f) x = Z n f x := by
  rw [Zcomb.app]
  exact beta (Z.isScottContinuous_right n f) x

theorem isGraph (n : ℕ) :
    Zcomb n = graph (fun f => funOf (Zcomb n) f) := by
  apply graph_ext
  intro f
  rw [Zcomb.app]

theorem app_isGraph (n : ℕ) (f : Pomega) :
    funOf (Zcomb n) f = graph (fun x => funOf (funOf (Zcomb n) f) x) := by
  rw [Zcomb.app]
  apply graph_ext
  intro x
  exact (beta (Z.isScottContinuous_right n f) x).symm

end Zcomb

end DomainTheory.DataTypesAsLattices
```

2.4.3 Theorem 3.1 ✓

THEOREM 3.1 (The generator theorem). *All LAMBDA-definable elements can be obtained from* **G** *by iterated application.*

A distributive function f is said to be *total* iff $f(n) \in \omega$ for all $n \in \omega$. As they come from obvious

primitive recursive functions, we do not stop to write out LAMBDA-definitions of these three total functions:

$$(3.4) \quad \mathbf{apply} = \lambda n \in \omega.\, \lambda m \in \omega.\, (n, m) + 1$$

$$(3.5) \quad \mathbf{op}((n, m)) = n$$

$$(3.6) \quad \mathbf{arg}((n, m)) = m.$$

The point of these auxiliary combinators concerns our Gödel numbering of the r.e. sets. The number 0 will correspond to the generator $\mathbf{G}$; while $(n, m) + 1$ will correspond to the application of the nth set to the mth. This is formalized in the combinator $\mathbf{val}$ which is defined as the least fixed point of the equation:

$$(3.7) \quad \mathbf{val} = \lambda k \in \omega.\, k \supset \mathbf{G},\, \mathbf{val}(\mathbf{op}(k - 1))(\mathbf{val}(\mathbf{arg}(k - 1))).$$

This function accomplishes the enumeration as follows:

Theorem 3.1 is obvious from the construction of $\mathbf{G}$, because $\mathbf{G}(\mathbf{G}) = 0$ and $\mathbf{G}(0)(0) = \mathbf{suc}$, and so the $\mathbf{G}(0)(i)$ give us all the other combinators.

Formalization. Combinatory elements are those built from the base combinators $\mathbf{0}$, $\mathbf{suc}$, $\mathbf{pred}$, $\mathbf{cond}$, $\mathbf{K}$, $\mathbf{S}$ by application. Generation from $\mathbf{G}$ is the inductive closure of $\{\mathbf{G}\}$ under application. The generator theorem equates the two.

Theorem (`theorem_3_1`). An element is combinatory if and only if it is generated from $\mathbf{G}$ by iterated application.

Proof. ($\Rightarrow$) By induction on the combinatory construction: $\mathbf{0} = \mathbf{G}(\mathbf{G})$ and $\mathbf{suc} = \mathbf{G}(0)(0)$, so both lie in the $\mathbf{G}$-closure; the remaining base combinators are obtained by further applications of $\mathbf{G}$ to 0 and $1 = \mathbf{suc}(0)$ as in the generator identities; the inductive step is closure under application. ($\Leftarrow$) By induction on generation from $\mathbf{G}$: $\mathbf{G}$ itself is combinatory, and the combinatory class is closed under application. ■

theorem_3_1.lean

```
module

public import DomainTheory.DataTypesAsLattices.Enumeration.GeneratedFromG

import DomainTheory.DataTypesAsLattices.Enumeration.Gcomb_more
import DomainTheory.DataTypesAsLattices.Enumeration.sucC_from_G
import DomainTheory.DataTypesAsLattices.Enumeration.predC_from_G
import DomainTheory.DataTypesAsLattices.Enumeration.condC_from_G
import DomainTheory.DataTypesAsLattices.Enumeration.Kcomb_from_G
import DomainTheory.DataTypesAsLattices.Enumeration.Scomb_from_G
import DomainTheory.DataTypesAsLattices.Enumeration.sucC_zero

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

theorem theorem_3_1 {u : Pomega} :
    IsCombinatory u ↔ GeneratedFromG u := by
  have hzero : GeneratedFromG zeroC := by
    simpa [Gcomb.app_self] using
```

```
    GeneratedFromG.app GeneratedFromG.G GeneratedFromG.G
  constructor
  · intro hu
    have hsuc : GeneratedFromG sucC := by
      simpa [sucC_from_G] using
        GeneratedFromG.app (GeneratedFromG.app GeneratedFromG.G hzero) hzero
    have hone : GeneratedFromG (ofNat 1) := by
      simpa [sucC_zero] using GeneratedFromG.app hsuc hzero
    induction hu with
    | zero => exact hzero
    | suc => exact hsuc
    | pred =>
      simpa [predC_from_G] using
        GeneratedFromG.app
          (GeneratedFromG.app (GeneratedFromG.app GeneratedFromG.G hzero) hone) hzero
    | cond =>
      simpa [condC_from_G] using
        GeneratedFromG.app
          (GeneratedFromG.app
            (GeneratedFromG.app (GeneratedFromG.app GeneratedFromG.G hzero) hone) hone
    )
          hzero
    | K =>
      simpa [Kcomb_from_G] using
        GeneratedFromG.app
          (GeneratedFromG.app
            (GeneratedFromG.app
              (GeneratedFromG.app (GeneratedFromG.app GeneratedFromG.G hzero) hone)
                hone)
            hone)
          hzero
    | S =>
      simpa [Scomb_from_G] using
        GeneratedFromG.app
          (GeneratedFromG.app
            (GeneratedFromG.app
              (GeneratedFromG.app (GeneratedFromG.app GeneratedFromG.G hzero) hone)
                hone)
            hone)
          hone
    | app _ _ iu iv => exact .app iu iv
  · intro hu
    induction hu with
    | G => exact Gcomb.combinatory
    | app _ _ iu iv => exact .app iu iv

end DomainTheory.DataTypesAsLattices
```

2.4.4 Application ✓

Scott codes application of combinators by operations on integers. After Theorem 3.1 he introduces three total (primitive recursive) functions used in the Gödel numbering of r.e. sets; the integer form of application is the first, and the two projections of Cantor pairing are the others. As they come from obvious primitive recursive functions, the paper does not write out LAMBDA-definitions. The point of these auxiliaries is that

0 will correspond to the generator $\mathbf{G}$, while $(n, m) + 1$ will correspond to applying the nth set to the mth.

Definition (`applyNat`, equation (3.4)). For $n, m \in \omega$,

$$\mathrm{applyNat}(n, m) = (n, m) + 1,$$

where (n, m) is Cantor pairing (`pair`). This is the integer form of $\mathbf{apply}(n)(m)$.

Definition (`opNat`, equation (3.5)). $\mathrm{opNat}(k) = (\mathrm{unpair}\, k)_1$. On a coded pair this recovers the first component, so $\mathbf{op}((n, m)) = n$.

Definition (`argNat`, equation (3.6)). $\mathrm{argNat}(k) = (\mathrm{unpair}\, k)_2$. On a coded pair this recovers the second component, so $\mathbf{arg}((n, m)) = m$.

Theorem (`eq_3_5`). For all $n, m \in \omega$, $\mathrm{opNat}((n, m)) = n$.

Proof. Unfold `opNat` and apply `unpair_pair`: $\mathrm{unpair}((n, m)) = (n, m)$. ■

Theorem (`eq_3_6`). For all $n, m \in \omega$, $\mathrm{argNat}((n, m)) = m$.

Proof. Unfold `argNat` and apply `unpair_pair`. ■

Theorem (`eq_3_8_apply`, first half of (3.8)). $\mathrm{applyNat}(0, 0) = 1$.

Proof. $(0, 0) = 0$, so $(0, 0) + 1 = 1$. ■

Theorem (`eq_3_9_apply`, first half of (3.9)). $\mathrm{applyNat}(0, 1) = 3$.

Proof. $(0, 1) = 2$, so $(0, 1) + 1 = 3$. ■

Theorem (`eq_3_10_apply`, first half of (3.10)). $\mathrm{applyNat}(3, 1) = 12$.

Proof. $(3, 1) = 11$, so $(3, 1) + 1 = 12$. ■

These three special cases are the integer codes later used for numerals and $\mathbf{val}$: by (3.8)–(3.10) one has $\mathbf{val}(1) = 0$, $\mathbf{val}(3) = \langle \mathbf{suc}, \ldots \rangle$, and $\mathbf{val}(12) = \mathbf{suc}$.

`applyNat.lean`

```
module

public import Mathlib.Computability.Halting
public import DomainTheory.DataTypesAsLattices.Pomega.pair

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

def applyNat (n m : ℕ) : ℕ := pair n m + 1

noncomputable def opNat (k : ℕ) : ℕ := (unpair k).1

noncomputable def argNat (k : ℕ) : ℕ := (unpair k).2

theorem eq_3_5 (n m : ℕ) : opNat (pair n m) = n := by simp [opNat, unpair_pair]

theorem eq_3_6 (n m : ℕ) : argNat (pair n m) = m := by simp [argNat, unpair_pair]

theorem eq_3_8_apply : applyNat 0 0 = 1 := by simp [applyNat, pair]

theorem eq_3_9_apply : applyNat 0 1 = 3 := by simp [applyNat, pair]

theorem eq_3_10_apply : applyNat 3 1 = 12 := by simp [applyNat, pair]

end DomainTheory.DataTypesAsLattices
```

2.4.5 Unpairing ✓

Cantor pairing is inverted by locating the least triangle bucket that contains a code and reading off the residual. The formalization uses a search lemma and two equivalent presentations of that search, then defines the computational unpair map.

Definition (`triangle`, from `pair.lean`). $\mathrm{triangle}(w) = w(w+1)/2$. The codes with diagonal sum w occupy the half-open interval $[\mathrm{triangle}(w),\ \mathrm{triangle}(w+1))$.

Definition (`unpairWRec`). Recursion on n: $\mathrm{unpairWRec}(k, 0) = 0$, and

$$\mathrm{unpairWRec}(k, n+1) = \begin{cases} \mathrm{unpairWRec}(k, n) & \text{if } k < \mathrm{triangle}(n+1), \\ n+1 & \text{otherwise.} \end{cases}$$

This advances the candidate bucket until k lies below $\mathrm{triangle}(w+1)$.

Definition (`unpairW`). $\mathrm{unpairW}(k) = \mathrm{unpairWRec}(k, k)$.

Definition (`unpairComp`). With $w = \mathrm{Nat.find}(\mathrm{exists_triangle_succ}\, k)$ and $m = k - \mathrm{triangle}(w)$, set $\mathrm{unpairComp}(k) = (w - m,\ m)$.

Theorem (`exists_triangle_succ`). For every $k \in \omega$ there is a w with $k < \mathrm{triangle}(w+1)$.

Proof. Take $w = k$. Then $\mathrm{triangle}(k+1) = \mathrm{triangle}(k) + (k+1)$, so $k < k+1 \le \mathrm{triangle}(k+1)$. ■

Theorem (`unpairWRec.succ`). Unfolding the successor step:

$$\mathrm{unpairWRec}(k, n+1) = \begin{cases} \mathrm{unpairWRec}(k, n) & \text{if } k < \mathrm{triangle}(n+1), \\ n+1 & \text{otherwise.} \end{cases}$$

Proof. By definition of `Nat.rec`. ■

Theorem (`unpairWRec.lt`). For all k, n, either $k < \mathrm{triangle}(\mathrm{unpairWRec}(k, n) + 1)$ or $\mathrm{unpairWRec}(k, n) = n$.

Proof. Induction on n. At 0, case-split on $k < \mathrm{triangle}(1)$. At $n+1$, if $k < \mathrm{triangle}(n+1)$ then the recursive value inherits the claim from the inductive hypothesis (and if that value equals n, the same inequality $k < \mathrm{triangle}(n+1)$ applies); otherwise the value is $n+1$. ■

Theorem (`unpairWRec.min`). If $m < \mathrm{unpairWRec}(k, n)$, then $\neg(k < \mathrm{triangle}(m+1))$.

Proof. Induction on n, generalizing m. At 0 the hypothesis $m < \mathrm{unpairWRec}(k, 0)$ is impossible. At $n+1$, if $k < \mathrm{triangle}(n+1)$ reduce to the inductive hypothesis; otherwise $\mathrm{unpairWRec}(k, n+1) = n+1$, so $m \le n$, and any $k < \mathrm{triangle}(m+1)$ would force $k < \mathrm{triangle}(n+1)$ by monotonicity of triangle, a contradiction. ■

Theorem (`unpairW.eq`). $\mathrm{unpairW}(k) = \mathrm{Nat.find}(\mathrm{exists_triangle_succ}\, k)$.

Proof. Show $\mathrm{unpairWRec}(k, k)$ satisfies the characterizing properties of Nat.find: it is a witness (`unpairWRec.lt`, using $k+1 \le \mathrm{triangle}(k+1)$ when the residual case $\mathrm{unpairWRec}(k, k) = k$ occurs), and no smaller index works (`unpairWRec.min`). ■

Theorem (`unpairComp.eq`). $\mathrm{unpairComp}(k) = \mathrm{unpair}(k)$.

Proof. Let w be that find-witness and $m = k - \mathrm{triangle}(w)$. Minimality of w gives $\mathrm{triangle}(w) \le k$, and $k < \mathrm{triangle}(w+1)$ gives $m \le w$. Then $(w - m) + m = w$, so $\mathrm{pair}(w - m,\ m) = k$ by the triangle form of pairing. Apply `unpair_pair`. ■

`unpairW.lean`

```
module

public import Mathlib.Computability.Halting
```

```
public import DomainTheory.DataTypesAsLattices.Pomega.pair

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

open Nat.Partrec.Code

theorem exists_triangle_succ (k : ℕ) : ∃ w, k < triangle (w + 1) :=
  ⟨k, by
    rw [triangle_succ]
    exact lt_of_lt_of_le (Nat.lt_succ_self k) (Nat.le_add_left (k + 1) _)⟩

def unpairWRec (k n : ℕ) : ℕ :=
  Nat.rec 0 (fun w ih => if k < triangle (w + 1) then ih else w + 1) n

namespace unpairWRec

theorem succ (k n : ℕ) :
    unpairWRec k (n + 1) =
      if k < triangle (n + 1) then unpairWRec k n else n + 1 :=
  rfl

theorem lt (k n : ℕ) :
    k < triangle (unpairWRec k n + 1) ∨ unpairWRec k n = n := by
  induction n with
  | zero =>
    by_cases hk : k < triangle 1
    · exact Or.inl (by simp [unpairWRec, hk])
    · exact Or.inr (by simp [unpairWRec])
  | succ n ih =>
    by_cases hk : k < triangle (n + 1)
    · simp [unpairWRec.succ, hk]
      exact ih.elim Or.inl fun heq => Or.inl (by simpa [heq] using hk)
    · simp [unpairWRec.succ, hk]

theorem min (k n m : ℕ)
    (hm : m < unpairWRec k n) : ¬k < triangle (m + 1) := by
  induction n generalizing m with
  | zero =>
    simp [unpairWRec] at hm
  | succ n ih =>
    by_cases hk : k < triangle (n + 1)
    · simp [unpairWRec.succ, hk] at hm
      exact ih m hm
    · simp [unpairWRec.succ, hk] at hm
      intro hlt
      have hm' : m ≤ n := Nat.lt_succ_iff.mp hm
      exact hk (lt_of_lt_of_le hlt (triangle_le_of_le (Nat.succ_le_succ hm')))

end unpairWRec

def unpairW (k : ℕ) : ℕ := unpairWRec k k
```

```
namespace unpairW

theorem eq (k : ℕ) : unpairW k = Nat.find (exists_triangle_succ k) := by
  refine ((Nat.find_eq_iff (exists_triangle_succ k)).mpr ⟨?_, fun m hm =>
      unpairWRec.min k k m hm⟩).symm
  rcases unpairWRec.lt k k with h | hrec
  · exact h
  · have : k + 1 ≤ triangle (k + 1) := by
      cases k with
      | zero => simp [triangle]
      | succ k =>
        rw [triangle_succ]
        exact Nat.le_add_left _ _
    simpa [unpairW, hrec] using lt_of_lt_of_le (Nat.lt_succ_self k) this

end unpairW

def unpairComp (k : ℕ) : ℕ × ℕ :=
  let w := Nat.find (exists_triangle_succ k)
  let m := k - triangle w
  (w - m, m)

namespace unpairComp

theorem eq (k : ℕ) : unpairComp k = unpair k := by
  unfold unpairComp
  set w := Nat.find (exists_triangle_succ k) with hw
  have hlt : k < triangle (w + 1) := by
    simpa [hw] using Nat.find_spec (exists_triangle_succ k)
  have hle : triangle w ≤ k := by
    cases hwc : w with
    | zero => simp [triangle]
    | succ w' =>
      have hlt' : w' < Nat.find (exists_triangle_succ k) := by
        rw [← hw, hwc]
        exact Nat.lt_succ_self w'
      exact Nat.le_of_not_gt (Nat.find_min (exists_triangle_succ k) hlt')
  have hm : k - triangle w ≤ w := by
    have : k < triangle w + (w + 1) := by
      rwa [triangle_succ] at hlt
    omega
  have hpair : pair (w - (k - triangle w)) (k - triangle w) = k := by
    have : w - (k - triangle w) + (k - triangle w) = w := Nat.sub_add_cancel hm
    simp [pair_eq_triangle, this, Nat.add_sub_of_le hle]
  rw [← unpair_pair (w - (k - triangle w)) (k - triangle w), hpair]

end unpairComp

end DomainTheory.DataTypesAsLattices
```

2.4.6 Numerals ✓

The numeral for each integer is built by iterating application, starting from the code of zero.

Definition (num, (3.11)). $\mathrm{num}(0) = 1$ and $\mathrm{num}(n+1) = \mathrm{applyNat}(12, \mathrm{num}(n))$. By (3.8) and (3.10),

1 is the code of 0 and 12 is the code of successor, so $\mathrm{num}(n)$ is the code of the numeral for n.

num.lean

```
module

public import DomainTheory.DataTypesAsLattices.Enumeration.applyNat

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

def num : ℕ → ℕ
  | 0 => 1
  | n + 1 => applyNat 12 (num n)

end DomainTheory.DataTypesAsLattices
```

2.4.7 Val rank ✓

The enumeration **val** is defined by recursion on application codes. Rank measures the depth of that recursion, and bit lists collect the one-bits of a code when scanning finite approximations.

Definition (`valRank`). $\mathrm{valRank}(0) = 1$, and for a positive code $p + 1$ the rank is one more than the maximum of the ranks of the two Cantor components of p.

Definition (`bitList`). $\mathrm{bitList}(j)$ is the list of indices $k \leq j$ for which the kth bit of j is set.

Definition (`Extensional`). A map p on codes is extensional relative to an enumeration val when $\mathrm{val}(n) = \mathrm{val}(m)$ implies $\mathrm{val}(p(n)) = \mathrm{val}(p(m))$. Theorem 3.5 uses this for $\mathrm{val} = \mathbf{val}$.

valRank.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.Pomega
public import DomainTheory.DataTypesAsLattices.Pomega.pair

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

noncomputable def valRank : ℕ → ℕ
  | 0 => 1
  | p + 1 => max (valRank (unpair p).1) (valRank (unpair p).2) + 1
decreasing_by
  · exact (pair_lt_left (unpair p).1 (unpair p).2).trans_le (by
      have := pair_unpair p
      omega)
  · exact (pair_lt_right (unpair p).1 (unpair p).2).trans_le (by
      have := pair_unpair p
      omega)
```

```
def bitList (j : ℕ) : List ℕ :=
  (List.range (j + 1)).filter (fun k => j.testBit k)

class Extensional (val : ℕ → Pomega) (p : ℕ → ℕ) : Prop where
  out : ∀ n m, val n = val m → val (p n) = val (p m)

end DomainTheory.DataTypesAsLattices
```

2.4.8 Theorem 3.2 ✓

THEOREM 3.2 (The enumeration theorem). *The combinator* **val** *enumerates the LAMBDA-definable elements in that* $\mathbf{RE} = \{\mathbf{val}(n) \mid n \in \omega\}$. *Further:*

(i) $\mathbf{val}(0) = \mathbf{G}$,

(ii) $\mathbf{val}(\mathbf{apply}(n)(m)) = \mathbf{val}(n)(\mathbf{val}(m))$.

As a principal application of the Enumeration Theorem we may mention the following: suppose u is given as LAMBDA-definable. We look at its definition and rewrite it in terms of combinators—eventually in terms of $\mathbf{G}$ alone. Then using 0 and **apply** we write down the name of an integer corresponding to the combination—say, n. By Theorem 3.2 we see that we have *effectively found* from the definition an integer such that $\mathbf{val}\, n = u$. This remark can be strengthened by some numerology.

Formalization. Scott's (i)–(ii) and the set equality $\mathbf{RE} = \{\mathbf{val}(n)\}$ are assembled in `theorem_3_2.lean` from the recursive enumerator `valNat` (equation (3.7)) and Theorem 3.1. Each name below is the Lean theorem; proofs live in that module.

Theorem (`theorem_3_2`). For every n, $\mathrm{valNat}(n) \in \mathbf{RE}$; $\mathrm{valNat}(0) = \mathbf{G}$; and for all n, m,

$$\mathrm{valNat}(\mathrm{applyNat}(n, m)) = \mathrm{valNat}(n) \cdot \mathrm{valNat}(m).$$

Proof. Package three library facts on `valNat`: `valNat.combinatory` (every value is combinatory, hence in $\mathbf{RE}$), `valNat.zero`, and `valNat.app`. ■

Theorem (`theorem_3_2.surjective`). If u is combinatory, then $\exists n.\ \mathrm{valNat}(n) = u$.

Proof. By Theorem 3.1, combinatory elements are exactly those generated from $\mathbf{G}$ by application. Induct on that generation: $\mathbf{G}$ is $\mathrm{valNat}(0)$; if $u = \mathrm{valNat}(n)$ and $v = \mathrm{valNat}(m)$, then $u \cdot v = \mathrm{valNat}(\mathrm{applyNat}(n, m))$ by `valNat.app`. ■

Theorem (`theorem_3_2.i`). $\mathrm{condSet}(0,\ \mathbf{G},\ \bot) = \mathbf{G}$.

Proof. Extensionality on membership. Left-to-right: a member of the conditional is either in $\mathbf{G}$ on the true branch, or comes from a witness that $0 \in 0$, which is impossible. Right-to-left: every member of $\mathbf{G}$ sits on the true branch. ■

Theorem (`theorem_3_2.range`). $\mathbf{RE} = \mathrm{Set.range}\,\mathrm{valNat}$.

Proof. If $u \in \mathbf{RE}$, then u is combinatory, so `surjective` supplies a preimage. Conversely, every $\mathrm{valNat}(n)$ lies in $\mathbf{RE}$ by the first conjunct of `theorem_3_2`. ■

`theorem_3_2.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Enumeration.RE
public import DomainTheory.DataTypesAsLattices.Enumeration.valNat

import DomainTheory.DataTypesAsLattices.Enumeration.theorem_3_1
import Mathlib.Algebra.GroupWithZero.Nat
```

```
@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

theorem theorem_3_2 :
    (∀ n, valNat n ∈ RE) ∧
      valNat 0 = Gcomb ∧
        (∀ n m, valNat (applyNat n m) = valNat n ? valNat m) :=
  ⟨fun n => valNat.combinatory n, valNat.zero, valNat.app⟩

namespace theorem_3_2

theorem surjective {u : Pomega} (hu : IsCombinatory u) :
    ∃ n, valNat n = u := by
  revert hu
  rw [theorem_3_1]
  intro h
  induction h with
  | G => exact ⟨0, valNat.zero⟩
  | app _ _ iu iv =>
    obtain ⟨n, hn⟩ := iu
    obtain ⟨m, hm⟩ := iv
    exact ⟨applyNat n m, by rw [valNat.app, hn, hm]⟩

theorem i : condSet (ofNat 0) Gcomb botElem = Gcomb := by
  ext n
  constructor
  · intro hn
    rcases hn with ⟨hG, _⟩ | ⟨_, ⟨k, hk⟩⟩
    · exact hG
    · simp [ofNat] at hk
  · intro hG
    exact Or.inl ⟨hG, rfl⟩

theorem range : RE = Set.range valNat := by
  ext u
  constructor
  · intro hu
    exact theorem_3_2.surjective hu
  · intro ⟨n, hn⟩
    simpa [← hn] using (theorem_3_2).1 n

end theorem_3_2

end DomainTheory.DataTypesAsLattices
```

2.4.9 Recursion codes ✓

Integer codes used in the second recursion theorem package the diagonal substitution $m \mapsto \mathbf{apply}(m)(\mathbf{num}(m))$ and its relativization to a coding function v.

Definition (`secondRecSubst`). $\mathrm{secondRecSubst}(m) = \mathrm{applyNat}(m, \mathrm{num}(m))$.

Definition (`recNat`). $\mathrm{recNat}(v, n) = \mathrm{applyNat}(v(n), \mathrm{num}(v(n)))$. Theorem 3.3 uses a primitive recursive v for which $\mathbf{val}(\mathrm{recNat}(v, n))$ realizes the fixed-point equation at code n.

recNat.lean

```
module

public import Mathlib.Computability.Halting
public import DomainTheory.DataTypesAsLattices.Enumeration.applyNat
public import DomainTheory.DataTypesAsLattices.Enumeration.num

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

def secondRecSubst (m : ℕ) : ℕ := applyNat m (num m)

def recNat (v : ℕ → ℕ) (n : ℕ) : ℕ :=
  applyNat (v n) (num (v n))

end DomainTheory.DataTypesAsLattices
```

2.4.10 Plotkin helpers ✓

Finite Plotkin steps: normalized application of e_p, tagging via σ_j, and iterated predecessors on numerals.

Theorem (`PlotkinHelpers.normalized_finite_app`). Applying the graph of $y \mapsto e_p(y)$ recovers e_p itself: $\mathrm{graph}(y \mapsto e_p(y))\, u = e_p(u)$.

Proof. The β-law for continuous application of e_p. ■

Theorem (`PlotkinHelpers.normalized_finite_fresh_app`).

$$\mathrm{graph}(y \mapsto e_p(y))\big(Z(m, e_p, e_q) \cup \{(\max(p, q) + 1,\ m)\}\big) = Z(m + 1, e_p, e_q).$$

Proof. Reduce by the normalized β-law, then discard the fresh tag by the union-fresh application of e_p. ■

Theorem (`PlotkinHelpers.finite_sigma_plain_app`).

$$\big(\mathrm{graph}(y \mapsto e_p(y)) \cup \mathrm{graph}(\sigma_{\max(p,q)+1})\big)\, Z(m, e_p, e_q) = Z(m + 1, e_p, e_q).$$

Proof. Split the union application; the normalized part iterates once, while σ_j on $Z(m, e_p, e_q)$ is empty by the finite no-tag bound. ■

Theorem (`PlotkinHelpers.finite_sigma_union_app`).

$$\begin{aligned}&\big(\mathrm{graph}(y \mapsto e_p(y)) \cup \mathrm{graph}(\sigma_{\max(p,q)+1})\big)\big(Z(m, e_p, e_q) \cup \{(\max(p, q) + 1,\ m)\}\big)\\ &\quad = Z(m + 1, e_p, e_q) \cup \{(\max(p, q) + 1,\ m + 1)\}.\end{aligned}$$

Proof. Split the union: the normalized fresh step yields the next iterate, and σ_j on the fresh singleton advances the tag. ■

Theorem (`PlotkinHelpers.predSet_iterate_expTag_isScottContinuous`). For each k, the map $e \mapsto \mathrm{predSet}^k(e(0))$ is Scott-continuous.

Proof. Induction on k: the base is left-continuity of application at 0; the step composes continuous $\mathrm{predSet}$ with the inductive map. ■

Theorem (`PlotkinHelpers.predSet_iterate_ofNat`). $\mathrm{predSet}^k(\overline{k+i}) = \overline{i}$.

Proof. Induction on k: the base is immediate; the step uses the successor law for $\mathrm{predSet}$ on numerals. ■

Theorem (`PlotkinHelpers.predSet_iterate_self`). $\mathrm{predSet}^k(\overline{k}) = \overline{0}$.

Proof. The previous identity at $i = 0$. ■

`PlotkinHelpers.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Enumeration.SumMed
public import DomainTheory.DataTypesAsLattices.Enumeration.Zcomb

import DomainTheory.DataTypesAsLattices.Lambda.eq_2_9
import DomainTheory.DataTypesAsLattices.Lambda.predSet_more
import DomainTheory.DataTypesAsLattices.Graph.funOf_more
import DomainTheory.DataTypesAsLattices.Graph.beta
import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_3

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace PlotkinHelpers

theorem normalized_finite_app (p : ℕ) (u : Pomega) :
    funOf (graph (fun y => funOf (e p) y)) u = funOf (e p) u :=
  beta (funOf.isScottContinuous (e p)) u

theorem normalized_finite_fresh_app (p q m : ℕ) :
    funOf (graph (fun y => funOf (e p) y))
        (Z m (e p) (e q) ∪ {pair (max p q + 1) m}) =
      Z (m + 1) (e p) (e q) := by
  rw [normalized_finite_app,
    funOf.e_union_fresh p (max p q + 1) m _
      (Nat.lt_succ_of_le (Nat.le_max_left p q))]
  rfl

theorem finite_sigma_plain_app (p q m : ℕ) :
    funOf
        (graph (fun y => funOf (e p) y) ∪
          graph (sigmaJ (max p q + 1)))
        (Z m (e p) (e q)) =
      Z (m + 1) (e p) (e q) := by
  rw [eq_2_9, normalized_finite_app, sigmaJ.app,
    sigmaJ.of_no_tag (fun k => Z.finite_no_tag p q m k)]
  simp [botElem, Z]

theorem finite_sigma_union_app (p q m : ℕ) :
    funOf
        (graph (fun y => funOf (e p) y) ∪
          graph (sigmaJ (max p q + 1)))
        (Z m (e p) (e q) ∪ {pair (max p q + 1) m}) =
```

```
      Z (m + 1) (e p) (e q) ∪ {pair (max p q + 1) (m + 1)} := by
  rw [eq_2_9, normalized_finite_fresh_app, sigmaJ.app,
    sigmaJ.union_fresh (fun k => Z.finite_no_tag p q m k)]

theorem predSet_iterate_expTag_isScottContinuous (k : ℕ) :
    IsScottContinuous (fun e => predSet^[k] (funOf e (ofNat 0))) := by
  induction k with
  | zero => exact funOf.isScottContinuous_left (ofNat 0)
  | succ k ih =>
    have h := theorem_1_3 (f := predSet)
      (g := fun e => predSet^[k] (funOf e (ofNat 0)))
      predSet.isScottContinuous ih
    convert h using 1
    funext e
    exact Function.iterate_succ_apply' predSet k (funOf e (ofNat 0))

theorem predSet_iterate_ofNat :
    ∀ k i, predSet^[k] (ofNat (k + i)) = ofNat i
  | 0, i => by
    simp [Function.iterate_zero]
  | k + 1, i => by
    rw [Function.iterate_succ_apply]
    have : k + 1 + i = k + i + 1 := by omega
    rw [this, predSet.ofNat_succ]
    exact predSet_iterate_ofNat k i

theorem predSet_iterate_self (k : ℕ) :
    predSet^[k] (ofNat k) = ofNat 0 := by
  simpa using predSet_iterate_ofNat k 0

end PlotkinHelpers

end DomainTheory.DataTypesAsLattices
```

2.4.11 Theorem 3.3 ✓

THEOREM 3.3 (The second recursion theorem). Take a LAMBDA-definable element v such that:

(i) $\mathbf{val}(v(n)) = \lambda m \in \omega.\, \mathbf{val}(n)(\mathbf{apply}(m)(\mathbf{num}(m)))$,

and then define a combinator by:

(ii) $\mathbf{rec} = \lambda n \in \omega.\, \mathbf{apply}(v(n))(\mathbf{num}(v(n)))$.

Then we have a primitive recursive function with this fixed-point property:

(iii) $\mathbf{val}(\mathbf{rec}(n)) = \mathbf{val}(n)(\mathbf{rec}(n))$.

Note that if u is LAMBDA-definable, then we find first an n such that $\mathbf{val}(n) = u$. Next we calculate $k = \mathbf{rec}(n)$. This effectively gives us an integer such that $\mathbf{val}(k) = u(k)$. Gödel numbers represent expressions (combinations in $\mathbf{G}$), and $\mathbf{val}$ maps the numbers to the values denoted by the expressions in the model. The k just found thus represents an expression whose value is defined in terms of its own Gödel number. In recursion theory there are many applications of this result.

Formalization. Write $S(u)$ for the continuous function $\lambda x.\, \bigcup_{m \in x} u(\mathbf{apply}(m)(\mathbf{num}(m)))$, so Scott's right-hand side in (i) is $S(\mathbf{val}(n))$. A concrete total primitive recursive v is obtained by applying a fixed code for the operator $u \mapsto S(u)$ to n. The recursion code is $\mathbf{rec}(n) = \mathbf{apply}(v(n))(\mathbf{num}(v(n)))$ as in

(ii). A parallel self-application uses $\mathbf{Y}$: the code $\mathbf{apply}(\mathbf{Ycode}, n)$ satisfies $\mathbf{val}(\mathbf{apply}(\mathbf{Ycode}, n)) = \mathbf{val}(n)(\mathbf{val}(\mathbf{apply}(\mathbf{Ycode}, n)))$.

Theorem (`theorem_3_3.from_v`). Suppose $\mathbf{val}(v(n)) = S(\mathbf{val}(n))$. Setting $\mathbf{rec}(n) = \mathbf{apply}(v(n))(\mathbf{num}(v(n)))$, one has

$$\mathbf{val}(\mathbf{rec}(n)) = \mathbf{val}(n)(\mathbf{rec}(n)).$$

Proof. By the enumeration theorem, $\mathbf{val}(\mathbf{apply}(v(n))(\mathbf{num}(v(n)))) = \mathbf{val}(v(n))(\mathbf{val}(\mathbf{num}(v(n))))$. The hypothesis replaces the operator by $S(\mathbf{val}(n))$, and (3.12) gives $\mathbf{val}(\mathbf{num}(v(n))) = v(n)$. Unfolding S yields a union of applications of $\mathbf{val}(n)$ indexed by members of the numeral $v(n)$; that numeral is the singleton $\{v(n)\}$ in the coding, so the union reduces to the single term $\mathbf{val}(n)(\mathbf{apply}(v(n))(\mathbf{num}(v(n)))) = \mathbf{val}(n)(\mathbf{rec}(n))$. ■

Theorem (`theorem_3_3.i`). For the concrete v above, $\mathbf{val}(v(n)) = S(\mathbf{val}(n))$ for every n.

Proof. By construction $v(n)$ is the application of the code of the operator $u \mapsto S(u)$ to n. The enumeration theorem and the defining equation of that operator give $\mathbf{val}(v(n)) = S(\mathbf{val}(n))$. ■

Theorem (`theorem_3_3.ii`). For every total v and every n,

$$\mathbf{rec}(n) = \mathbf{apply}(v(n))(\mathbf{num}(v(n))).$$

Proof. This is the definition of $\mathbf{rec}$ in (ii). ■

Theorem (`theorem_3_3.val`). Writing $r(n) = \mathbf{apply}(\mathbf{Ycode}, n)$, one has

$$\mathbf{val}(r(n)) = \mathbf{val}(n)(\mathbf{val}(r(n))).$$

Proof. By the enumeration theorem, $\mathbf{val}(r(n)) = \mathbf{val}(\mathbf{Ycode})(\mathbf{val}(n))$. The code $\mathbf{Ycode}$ evaluates to the combinator $\mathbf{Y}$, and the fixed-point law for $\mathbf{Y}$ supplies $\mathbf{Y}(\mathbf{val}(n)) = \mathbf{val}(n)(\mathbf{Y}(\mathbf{val}(n)))$. ■

Theorem (`theorem_3_3`). There is a total primitive recursive v such that $\mathbf{rec}$ defined by (ii) is primitive recursive, (i) holds for this v, and (iii) holds for the corresponding $\mathbf{rec}$.

Proof. Take the concrete v of the preceding construction (application of the code of $u \mapsto S(u)$). It is primitive recursive, as is $\mathbf{rec}$ formed from it by pairing with $\mathbf{num}$. Clause (i) is the theorem just proved for this v; clause (ii) is the definition of $\mathbf{rec}$; clause (iii) follows from the general fixed-point lemma once (i) is known. ■

`theorem_3_3.lean`

```
module

public import Mathlib.Computability.Primrec.Basic
public import DomainTheory.DataTypesAsLattices.Enumeration.secondRecV
public import DomainTheory.DataTypesAsLattices.Enumeration.recCode

import DomainTheory.DataTypesAsLattices.Enumeration.valNat_codes
import DomainTheory.DataTypesAsLattices.Enumeration.eq_3_12
import DomainTheory.DataTypesAsLattices.Enumeration.primrec_recNat
import DomainTheory.DataTypesAsLattices.Enumeration.primrec_secondRecV

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices
```

```
namespace theorem_3_3

theorem from_v (v : ℕ → ℕ) (n : ℕ)
    (hv : valNat (v n) = secondRecVal (valNat n)) :
    valNat (recNat v n) = funOf (valNat n) (ofNat (recNat v n)) := by
  rw [recNat, valNat.app, hv, eq_3_12, secondRecVal.app]
  ext k
  constructor
  · intro hk
    obtain ⟨m, hm, hkm⟩ := Set.mem_iUnion₂.mp hk
    simp [ofNat] at hm; subst hm; exact hkm
  · intro hk
    exact Set.mem_iUnion₂.mpr ⟨v n, rfl, hk⟩

theorem i (n : ℕ) :
    valNat (secondRecV n) = secondRecVal (valNat n) := by
  rw [secondRecV, valNat.app, valNat.secondRecOperatorCode_eq,
    secondRecOperator.app]

theorem ii (v : ℕ → ℕ) (n : ℕ) :
    recNat v n = applyNat (v n) (num (v n)) := rfl

theorem val (n : ℕ) :
    valNat (recCode n) = funOf (valNat n) (valNat (recCode n)) := by
  rw [recCode, valNat.app, valNat.Ycode_eq]
  exact Ycomb.unfold (valNat n)

end theorem_3_3

theorem theorem_3_3 :
    ∃ v : ℕ → ℕ, Primrec v ∧
      Primrec (recNat v) ∧
      (∀ n, valNat (v n) = secondRecVal (valNat n)) ∧
      (∀ n, recNat v n = applyNat (v n) (num (v n))) ∧
      ∀ n, valNat (recNat v n) =
        funOf (valNat n) (ofNat (recNat v n)) :=
  ⟨secondRecV, primrec_secondRecV, primrec_recNat secondRecV primrec_secondRecV,
    theorem_3_3.i, theorem_3_3.ii secondRecV,
    fun n => theorem_3_3.from_v secondRecV n (theorem_3_3.i n)⟩

end DomainTheory.DataTypesAsLattices
```

2.4.12 Theorem 3.4 ✓

THEOREM 3.4 (The incompleteness theorem). The set of integers n such that $\mathbf{val}(n) = \bot$ is not r.e.; hence, there can be no effectively given formal system for enumerating all true equations between LAMBDA-terms.

(A critic may sense here an application of Church's thesis in stating the metatheoretic consequence of the nonresult.) A few details of the proof can be given to see how the notation works. First let v be a (total) primitive recursive function such that:

$$\mathbf{val}(v(n)) = n \cap \mathbf{val}(n),$$

and note that:

$$n \cap \mathbf{val}(n) = \bot \quad \text{iff} \quad n \notin \mathbf{val}(n).$$

Call the set in question in Theorem 3.4 the set b. If it were r.e., then so would be:

$$\{n \in \omega \mid v(n) \in b\} = (\lambda n \in \omega.\, v(n) \cap b \supset n, n)(\top).$$

That would mean having an integer k such that:

$$\mathbf{val}(k) = \{n \in \omega \mid v(n) \in b\}.$$

But then:

$$\begin{aligned} k \in \mathbf{val}(k) &\iff v(k) \in b \\ &\iff \mathbf{val}(v(k)) = \bot \\ &\iff k \notin \mathbf{val}(k), \end{aligned}$$

which gives us a contradiction. This is the usual diagonal argument.

theorem_3_4.lean

```
module

public import DomainTheory.DataTypesAsLattices.Computability.IsRE
public import DomainTheory.DataTypesAsLattices.Enumeration.valNat

import DomainTheory.DataTypesAsLattices.Enumeration.valNat_codes
import DomainTheory.DataTypesAsLattices.Computability.IsREu2ecombinatory
import DomainTheory.DataTypesAsLattices.Enumeration.primrec_diagonalInterCode

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_3_4.diagonal {val : ℕ → Pomega} {v : ℕ → ℕ} {b : Set ℕ}
    (hv : ∀ k, val (v k) = ofNat k ∩ val k)
    (hb : b = {j | val j = botElem})
    (hex : ∃ k, val k = {i | v i ∈ b}) : False := by
  obtain ⟨k, hk⟩ := hex
  have hiff : k ∈ val k ↔ v k ∈ b := by
    constructor
    · intro h
      have : k ∈ {i | v i ∈ b} := by rwa [hk] at h
      exact this
    · intro h
      have : k ∈ {i | v i ∈ b} := h
      rwa [← hk] at this
  have hinter : val (v k) = botElem ↔ k ∈ val k := by
    rw [hv]
    constructor
    · intro h hk'
      have this : k ∈ ofNat k ∩ val k := ⟨rfl, hk'⟩
      rw [h] at this
      exact this
```

```
    · intro h
      ext i
      constructor
      · intro ⟨hi, hval⟩
        simp [ofNat] at hi
        subst hi
        exact (h hval).elim
      · intro hi
        exact hi.elim
  have hbmem : v k ∈ b ↔ val (v k) = botElem := by
    rw [hb]; rfl
  have : k ∈ val k ↔ k ∈ val k :=
    hiff.trans (hbmem.trans hinter)
  by_cases hkmem : k ∈ val k
  · exact (this.mp hkmem) hkmem
  · exact hkmem (this.mpr hkmem)

theorem theorem_3_4.re_diagonal {val : ℕ → Pomega} {v : ℕ → ℕ}
    (hv : ∀ k, val (v k) = ofNat k ∩ val k)
    (_hRE : IsRE {j | val j = botElem})
    (hex : ∃ k, val k = {i | v i ∈ {j | val j = botElem}}) : False :=
  theorem_3_4.diagonal hv rfl hex

theorem theorem_3_4 :
    ¬ IsRE {n | valNat n = botElem} := by
  intro hb
  have hpre : IsRE {i | diagonalInterCode i ∈ {n | valNat n = botElem}} :=
    ⟨hb.out.comp primrec_diagonalInterCode.to_comp⟩
  obtain ⟨k, hk⟩ :=
    theorem_3_2.surjective (IsRE.combinatory hpre)
  exact theorem_3_4.diagonal (val := valNat) (v := diagonalInterCode)
    valNat.diagonalInterCode_eq rfl ⟨k, hk⟩

end DomainTheory.DataTypesAsLattices
```

2.4.13 Theorem 3.5 ✓

The relationship $\mathbf{val}(n) = \mathbf{val}(m)$ means that the expressions with Gödel numbers n and m have the same value in the model. (This is not only not r.e. but is a complete Π^0_2-predicate.) A *total* mapping can be regarded as a *syntactical* transformation on expressions defined via Gödel numbers. Such a mapping p is called *extensional* if it has the property:

$$\mathbf{val}(p(n)) = \mathbf{val}(p(m)) \quad \text{whenever} \quad \mathbf{val}(n) = \mathbf{val}(m).$$

The Myhill–Shepherdson theorem shows that extensional, syntactical mappings really depend on the *values* of the expressions. Precisely we have:

THEOREM 3.5 (The completeness theorem for definability). *If a (total) extensional mapping p is LAMBDA-definable, then there is a LAMBDA-definable q such that $\mathbf{val}(p(n)) = q(\mathbf{val}(n))$ for all $n \in \omega$.*

Of course q is uniquely determined (because the values of q are given at least on the finite sets). Thus any attempt to define something *new* by means of some strange mapping on Gödel numbers is bound to fail as long as it is *effective* and *extensional*. The main part of the argument is concentrated on showing these mappings to be *continuous*; that is why q exists.

Proof of Theorem 3.5. The argument is essentially the original one of Myhill–Shepherdson. Suppose p is computable, total and extensional. Define:

$$q = \{(j, m) \mid m \in \mathbf{val}(p(\mathbf{fin}(j)))\},$$

where $\mathbf{fin}$ is primitive recursive, and for all $j \in \omega$:

$$\mathbf{val}(\mathbf{fin}(j)) = e_j.$$

Certainly $q \in \mathbf{RE}$, and we will establish the theorem if we can prove "continuity":

$$\mathbf{val}(p(n)) = \bigcup\{\mathbf{val}(p(\mathbf{fin}(j))) \mid e_j \subseteq \mathbf{val}(n)\}.$$

We proceed by contradiction. Suppose first we have a $k \in \mathbf{val}(p(n))$, where $k \notin \mathbf{val}(p(\mathbf{fin}(j)))$ whenever $e_j \subseteq \mathbf{val}(n)$. Pick r to be a primitive recursive function whose range is *not* recursive. Define s, primitive recursive, so that for all $m \in \omega$:

$$\mathbf{val}(s(m)) = \{j \in \mathbf{val}(n) \mid m \notin \{r(i) \mid i \leq j\}\}.$$

The set $\mathbf{val}(n)$ must be infinite, because p is extensional, and if $\mathbf{val}(n) = e_j = \mathbf{val}(\mathbf{fin}(j))$, then $k \notin \mathbf{val}(p(\mathbf{fin}(j))) = \mathbf{val}(p(n))$. Note that $\mathbf{val}(s(m))$, as a subset of the infinite set, is *finite* if m is in the range of r; otherwise it is equal to $\mathbf{val}(n)$. Again by the extensionality of p we see that $k \in \mathbf{val}(p(s(m)))$ if and only if m is *not* in the range of r. But this puts an r.e. condition on m equivalent to a non-r.e. condition, which shows there is no such k.

For the second case suppose we have a $k \notin \mathbf{val}(p(n))$, where for a suitable $e_j \subseteq \mathbf{val}(n)$ it is the case that $k \in \mathbf{val}(p(\mathbf{fin}(j)))$. Define:

$$t = \lambda m \in \omega.\, e_j \cup (\mathbf{val}(m) \supset \mathbf{val}(n), \mathbf{val}(n)).$$

We have:

$$t(m) = \begin{cases} e_j & \text{if } \mathbf{val}(m) = \perp; \\ \mathbf{val}(n) & \text{if not.} \end{cases}$$

We choose u primitive recursive, where:

$$\mathbf{val}(u(m)) = t(m).$$

By the choice of k, and by the extensionality of p, and by the fact that $\mathbf{val}(n) \neq e_j$, we have:

$$k \in \mathbf{val}(p(u(m))) \quad \text{iff} \quad t(m) = e_j$$
$$\text{iff} \quad \mathbf{val}(m) = \perp.$$

But this is impossible, since one side is r.e. in m and the other is not by Theorem 3.4. As both cases lead to contradiction, continuity is established and the proof is complete.

Formalization. Write $\mathbf{fin}(j)$ for a code of the finite set e_j, and write

$$Q = \{(j, m) \mid m \in \mathbf{val}(p(\mathbf{fin}(j)))\}$$

for Scott's q. Continuity is the equality $\mathbf{val}(p(n)) = Q(\mathbf{val}(n))$, proved by ruling out the two failure modes below. The enumerator's range of a fixed non-recursive primitive recursive r plays the role of Scott's $\{r(i)\}$.

Theorem (`theorem_3_5.case1`). Let p be realized by a combinatory element and be extensional for $\mathbf{val}$. Suppose $k \in \mathbf{val}(p(n))$ yet $k \notin \mathbf{val}(p(\mathbf{fin}(j)))$ whenever $e_j \subseteq \mathbf{val}(n)$, and suppose $\mathbf{val}(n)$ is infinite. Then contradiction.

Proof. Form the primitive recursive s of Scott's first case (filter $\mathbf{val}(n)$ against the initial segment of the range of r up to stage j). Extensionality yields $k \in \mathbf{val}(p(s(m)))$ if and only if m lies outside the range of r. The left-hand side is an r.e. predicate of m (membership of a fixed k after composing the realizer of p with s), while the complement of the range of r is not r.e. ■

Theorem (`theorem_3_5.case2`). Under the same hypotheses on p, suppose $e_j \subseteq \mathbf{val}(n)$, $e_j \neq \mathbf{val}(n)$, $k \in \mathbf{val}(p(\mathbf{fin}(j)))$, and $k \notin \mathbf{val}(p(n))$. Then contradiction.

Proof. Form Scott's $t(m)$ (equal to e_j when $\mathbf{val}(m) = \bot$, and to $\mathbf{val}(n)$ otherwise) and a primitive recursive code u with $\mathbf{val}(u(m)) = t(m)$. Extensionality gives $k \in \mathbf{val}(p(u(m)))$ if and only if $\mathbf{val}(m) = \bot$. The left side is r.e. in m; the right side is not, by Theorem 3.4. ■

Theorem (`theorem_3_5.q`). $(j, m) \in Q$ if and only if $m \in \mathbf{val}(p(\mathbf{fin}(j)))$.

Proof. Immediate from the definition of Q as a set of coded pairs. ■

Theorem (`theorem_3_5.q_app`). $\mathbf{val}(p(\mathbf{fin}(j))) \subseteq Q(e_j)$.

Proof. Every $m \in \mathbf{val}(p(\mathbf{fin}(j)))$ contributes the pair (j, m) to Q, and $j \in e_j$. ■

Theorem (`theorem_3_5.unique`). If q and q' are Scott-continuous and agree on every finite e_n, then $q = q'$ as maps on $\mathbf{P}\omega$.

Proof. Every x is the directed union of the finite $e_n \subseteq x$; continuity and agreement on those pieces give $q(x) = q'(x)$. ■

Theorem (`theorem_3_5.of_realizer`). If $\mathbf{val}(p(n)) = q(\mathbf{val}(n))$ holds for all n, then that same family of equations holds for all n.

Proof. Immediate. ■

Theorem (`theorem_3_5`). If a total p is LAMBDA-definable and extensional for $\mathbf{val}$, then there is a LAMBDA-definable q with $\mathbf{val}(p(n)) = q(\mathbf{val}(n))$ for all n.

Proof. Take $q = Q$ as above; it is r.e., hence combinatory. For membership of k in $\mathbf{val}(p(n))$ versus $Q(\mathbf{val}(n))$, the two directions reduce to the continuity equation. Failure of either inclusion produces one of the two contradictory configurations already ruled out. ■

`theorem_3_5.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Computability.Realizes
public import DomainTheory.DataTypesAsLattices.Enumeration.myhillQ
public import DomainTheory.DataTypesAsLattices.Enumeration.valRank

import DomainTheory.DataTypesAsLattices.Enumeration.theorem_3_4
import DomainTheory.DataTypesAsLattices.Enumeration.primrec_myhillCase2Code
import DomainTheory.DataTypesAsLattices.Enumeration.primrec_myhillCase1Code
import DomainTheory.DataTypesAsLattices.Enumeration.haltEnum_more
import DomainTheory.DataTypesAsLattices.Enumeration.myhillQ_more
import DomainTheory.DataTypesAsLattices.Enumeration.valNat_codes
import DomainTheory.DataTypesAsLattices.Pomega.codeFinset
import DomainTheory.DataTypesAsLattices.Computability.IsREu2ecombinatory
import DomainTheory.DataTypesAsLattices.Lambda.eq_2_7_bot
import Mathlib.Order.Interval.Finset.Nat
```

```
@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

open Encodable
open Nat.Partrec (Code)
open Nat.Partrec.Code

namespace theorem_3_5

open Encodable
open Nat.Partrec (Code)
open Nat.Partrec.Code

theorem case1 {u : Pomega} {p : ℕ → ℕ} {n k : ℕ}
    (hu : IsCombinatory u) (hr : Realizes u p)
    (hext : Extensional valNat p)
    (hk : k ∈ valNat (p n))
    (hnin : ¬∃ j, e j ⊆ valNat n ∧ k ∈ valNat (p (fin j)))
    (_hinf : ¬(valNat n).Finite) : False := by
  have hiff : ∀ m,
      k ∈ valNat (p (myhillCase1Code n m)) ↔ ¬∃ t, haltEnum t = m := by
    intro m
    by_cases hex : ∃ t, haltEnum t = m
    · have hfin : ({j | ∀ i ≤ j, haltEnum i = m} : Pomega).Finite :=
        (Set.finite_Iio hex.choose).subset fun j hj =>
          Nat.lt_of_not_ge fun hle => hj hex.choose hle hex.choose_spec
      have hfins : (valNat (myhillCase1Code n m)).Finite := by
        rw [valNat.myhillCase1Code_eq]
        exact hfin.inter_of_right _
      obtain ⟨j, hj⟩ := e.exists_code_of_finite hfins
      have hje : e j ⊆ valNat n := by
        rw [hj, valNat.myhillCase1Code_eq]
        exact Set.inter_subset_left
      have : k ∈ valNat (p (fin j)) := fun h => hnin ⟨j, hje, h⟩
      have heq := hext.out (myhillCase1Code n m) (fin j) (by simp [hj, valNat.fin_eq])
      simp [heq, this, hex]
    · have hall : {j | ∀ i ≤ j, haltEnum i = m} = Set.univ := by
        ext j
        constructor
        · intro _; trivial
        · intro _ i _
          exact fun h => hex ⟨i, h⟩
      have : valNat (myhillCase1Code n m) = valNat n := by
        rw [valNat.myhillCase1Code_eq, hall]
        simp
      have heq := hext.out (myhillCase1Code n m) n this
      simp [heq, hk, hex]
  have hre : REPred fun m => ¬∃ t, haltEnum t = m :=
    _root_.REPred.of_eq
      (valNat.mem_comp_primrec (k := k) hu hr (primrec_myhillCase1Code n))
      fun m => hiff m
  exact haltEnum.range_not_computable
```

```
    ((ComputablePred.computable_iff_re_compl_re').2 ⟨haltEnum.range_re, hre⟩)

theorem case2 {u : Pomega} {p : ℕ → ℕ} {n j k : ℕ}
    (hu : IsCombinatory u) (hr : Realizes u p)
    (hext : Extensional valNat p)
    (hj : e j ⊆ valNat n)
    (_hne : e j = valNat n)
    (hkfin : k ∈ valNat (p (fin j)))
    (hkn : k ∈ valNat (p n)) : False := by
  have hiff : ∀ m, k ∈ valNat (p (myhillCase2Code j n m)) ↔ valNat m = botElem := by
    intro m
    by_cases hm : valNat m = botElem
    · have : valNat (myhillCase2Code j n m) = e j := by
        rw [valNat.myhillCase2Code_eq, hm, eq_2_7_bot]
        simp [botElem]
      have := hext.out (myhillCase2Code j n m) (fin j) (by simp [this, valNat.fin_eq])
      simp [this, hkfin, hm]
    · have : valNat (myhillCase2Code j n m) = valNat n :=
        valNat.myhillCase2Code_ne_bot j n m hj hm
      have := hext.out (myhillCase2Code j n m) n this
      simp [this, hkn, hm]
  have hre : REPred fun m => valNat m = botElem :=
    _root_.REPred.of_eq
      (valNat.mem_comp_primrec (k := k) hu hr (primrec_myhillCase2Code j n))
      fun m => hiff m
  exact theorem_3_4 ⟨hre⟩

theorem of_realizer {val : ℕ → Pomega} {p : ℕ → ℕ} {q : Pomega}
    (hq : ∀ n, val (p n) = funOf q (val n)) :
    ∀ n, val (p n) = funOf q (val n) := hq

theorem q (val : ℕ → Pomega) (p : ℕ → ℕ) (j m : ℕ) :
    pair j m ∈ myhillQ val p ↔ m ∈ val (p (fin j)) := by
  constructor
  · intro ⟨j', m', hp, hm⟩
    obtain ⟨rfl, rfl⟩ := pair_inj hp
    exact hm
  · intro hm
    exact ⟨j, m, rfl, hm⟩

theorem q_app (p : ℕ → ℕ) (j : ℕ) :
    valNat (p (fin j)) ⊆ funOf (myhillQ valNat p) (e j) := by
  intro m hm
  exact ⟨j, subset_rfl, ⟨j, m, rfl, by simpa [valNat.fin_eq] using hm⟩⟩

theorem unique {q q' : Pomega → Pomega}
    (hq : IsScottContinuous q) (hq' : IsScottContinuous q')
    (h : ∀ n, q (e n) = q' (e n)) (x : Pomega) : q x = q' x := by
  rw [hq.out, hq'.out]
  ext k
  simp [scottUnion, scottPiece, h]

end theorem_3_5

theorem theorem_3_5 {p : ℕ → ℕ}
    (hp : ∃ u, IsCombinatory u ∧ Realizes u p)
```

```
    (hext : Extensional valNat p) :
    ∃ q, IsCombinatory q ∧ ∀ n, valNat (p n) = funOf q (valNat n) := by
  obtain ⟨u, hu, hr⟩ := hp
  refine ⟨myhillQ valNat p, IsRE.combinatory (myhillQ.isRE hu hr), fun n => ?_⟩
  rw [myhillQ.app]
  ext k
  constructor
  · intro hk
    by_contra hnin
    have hinf : ∀ j, e j = valNat n → False := by
      intro j hj
      have : k ∈ valNat (p (fin j)) := by
        have := hext.out n (fin j) (by simp [valNat.fin_eq, hj])
        simpa [this, valNat.fin_eq] using hk
      exact hnin (Set.mem_iUnion.mpr ⟨j,
        Set.mem_iUnion.mpr ⟨by simp [hj], this⟩⟩)

    have hfin : ¬(valNat n).Finite := by
      intro hf
      obtain ⟨j, hj⟩ := e.exists_code_of_finite hf
      exact hinf j hj
    have hnin' : ¬∃ j, e j ⊆ valNat n ∧ k ∈ valNat (p (fin j)) := by
      intro ⟨j, hj, hkj⟩
      exact hnin (Set.mem_iUnion.mpr ⟨j, Set.mem_iUnion.mpr ⟨hj, hkj⟩⟩)
    exact theorem_3_5.case1 hu hr hext hk hnin' hfin
  · intro hk
    obtain ⟨j, hk⟩ := Set.mem_iUnion.mp hk
    obtain ⟨hj, hk⟩ := Set.mem_iUnion.mp hk
    by_contra hnin
    have hne : e j = valNat n := by
      intro hj'
      have := hext.out n (fin j) (by simp [valNat.fin_eq, hj'])
      exact hnin (by simpa [this, valNat.fin_eq] using hk)
    exact theorem_3_5.case2 hu hr hext hj hne hk hnin

end DomainTheory.DataTypesAsLattices
```

2.4.14 Theorem 3.6 ✓

The preceding results indicate that the expected results on r.e. sets are forthcoming in a smooth and unified manner in this setting. Some knowledge of r.e. theory was presupposed, but analysis shows that the knowledge required is slight. The notion of primitive recursive functions should certainly be well understood together with standard examples. Partial functions need not be introduced separately since they are naturally incorporated into LAMBDA (the theory of multiple-valued functions). As a working definition of r.e. one can take either "empty or the range of a primitive recursive function" or, more uniformly, "a set of the form $\{m \mid \exists n.\, m + 1 = p(n)\}$ where p is primitive recursive". A few obvious closure properties of r.e. sets should then be proved, and then an adequate foundation for the discussion of LAMBDA will have been provided.

The point of introducing LAMBDA is that further closure properties are more easily expressed in a theory where equations can be variously interpreted as involving numbers, functionals, etc., without becoming too heavily involved in intricate Gödel numbering and encodings. Another useful feature of the present theory concerns the ease with which we can introduce *relative recursiveness*.

As we have seen, $\{\mathbf{val}(n) \mid n \in \omega\}$ is an enumeration of all r.e. sets. Suppose we add a new set a as a new constant. What are the sets enumerable in a? Answer: $\{\mathbf{val}(n)(a) \mid n \in \omega\}$, since in combinatory logic a parameter can always be factored out as an extra argument. Another way to put the point is this: for b to be enumeration reducible to a it is necessary and sufficient that $b = u(a)$ where $u \in \mathbf{RE}$. This is *word for word* the definition given by Rogers (1967, pp. 146–147). What we have done is to put the theory of enumeration operators (Friedberg–Rogers and Myhill–Shepherdson) into a general setting in which the language LAMBDA not only provides definitions but also the basis of a calculus for demonstrating properties of the operators defined. The algebraic style of this language throws a little light on the notion of enumeration degree. In the first place we can identify the degree of an element with the set of all objects reducible to it (rather than just those equivalent to it) and write

$$\mathbf{Deg}(a) = \{u(a) \mid u \in \mathbf{RE}\}.$$

The set-theoretical inclusion is then the same as the partial ordering of degrees. What kind of a partially ordered set do we have?

THEOREM 3.6 (The subalgebra theorem). *The enumeration degrees are exactly the finitely generated combinatory subalgebras of* $\mathbf{P}\omega$.

By "subalgebras" here we of course mean subsets containing $\mathbf{G}$ and closed under application (hence, they contain all of $\mathbf{RE}$, the least subalgebra). Part of the assertion is that every finitely generated subalgebra has a single generator (under application). This fact is an easy extension of Theorem 3.1. Not very much seems to be known about enumeration degrees. Joins can obviously be formed using the pairing function $\langle x, y\rangle$ on sets. Each degree is a countable set; hence, it is trivial to obtain the existence of a sequence of degrees whose *infinite join* is not a degree (not finitely generated). The intersection of subalgebras is a subalgebra—but it may not be a degree even starting with degrees. There are no minimal degrees above $\mathbf{RE}$, but there are minimal *pairs* of degrees. Also for a given degree there are only countably many degrees minimal over it; but the question of whether the partial ordering of enumeration degrees is dense seems still to be open.

Theorem 3.6 shows that the semilattice of enumeration degrees is naturally extendable to a *complete lattice* (the lattice of all subalgebras of $\mathbf{P}\omega$), but whether there is anything interesting to say about this complete lattice from the point of view of structure is not at all clear. Rogers has shown (1967, pp. 151–153) that Turing degrees can be defined in terms of enumeration degrees by restricting to special elements. In our style of notation we would define the space:

$$\mathbf{TOT} = \{u \mid u = \$(u) \text{ and } \forall n \in \omega.\, u(n) \in \omega\},$$

the space of all graphs of total functions. Then the system $\{\mathbf{Deg}(u) \mid u \in \mathbf{TOT}\}$ is isomorphic to the system of Turing degrees. Now there are many other interesting subsets of $\mathbf{P}\omega$. Whether the degree structure of these various subsets is worth investigation is a question whose answer awaits some new ideas.

Proof of Theorem 3.6. Consider a degree $\mathbf{Deg}(a)$. This set is closed under application, because:

$$u(a)(v(a)) = \mathbf{S}(u)(v)(a),$$

and $\mathbf{S}(u)(v)$ is r.e. if both u and v are. Note that it also contains the element $\mathbf{G}$; hence, as a subalgebra, it is generated by a and $\mathbf{G}$.

Let A be any finitely generated subalgebra with generators $a'_0, a'_1, \ldots, a'_{n-1}$. Consider the element $a = \mathbf{cond}(\langle a'_0, a'_1, \ldots, a'_{n-1}\rangle)(\mathbf{G})$. As in the proof of Theorem 3.1, a generates A under application. It is then easy to see why $\mathbf{A} = \mathbf{Deg}(a)$.

Formalization. Write $\mathbf{Deg}(a) = \{r(a) \mid r \in \mathbf{RE}\}$ as above. Pack a finite list of generators into a single sequence element $\langle a'_0, \ldots, a'_{n-1}\rangle$ by iterating the binary sequence constructor, and form Scott's single generator

$$a = \mathbf{cond}(\langle a'_0, \ldots, a'_{n-1}\rangle)(\mathbf{G}).$$

(Thus $a(0) = \langle a'_0, \ldots\rangle$ and a still lies in any subalgebra containing the a'_i and $\mathbf{G}$.) The three lemmas below are the pieces of Scott's argument recorded in this note's Lean module.

Theorem (`theorem_3_6.degree`). For every a, the set $\mathbf{Deg}(a)$ is a combinatory subalgebra and contains a.

Proof. Closure under application is the $\mathbf{S}$-identity $r(a) \cdot s(a) = \mathbf{S}(r)(s)(a)$ already quoted; $\mathbf{G}$ appears as the constant map $\mathbf{K}(\mathbf{G})$ applied to a. The element a itself is recovered as $\mathbf{I}(a)$ with $\mathbf{I}$ combinatory. ■

Theorem (`theorem_3_6.finite`). If $a = \mathbf{cond}(\langle a'_0, \ldots\rangle)(\mathbf{G})$ is the single generator of a finite list, then the packed sequence $\langle a'_0, \ldots\rangle$ and the generator $\mathbf{G}$ both lie in $\mathbf{Deg}(a)$.

Proof. The packed sequence equals $a(0)$, and 0 is r.e., so evaluation at 0 is an r.e. operation applied to a. The generator $\mathbf{G}$ belongs to every degree by the preceding theorem. ■

Theorem (`theorem_3_6.converse`). Every x belongs to $\mathbf{Deg}(\mathbf{cond}(\langle x\rangle)(\mathbf{G}))$.

Proof. By the finite-list lemma, the singleton packing $\langle x\rangle$ lies in that degree. Applying it to 0 (again an r.e. operation, and degrees are closed under application) recovers x. ■

theorem_3_6.lean

```
module

public import DomainTheory.DataTypesAsLattices.Enumeration.singleGenerator

import DomainTheory.DataTypesAsLattices.Enumeration.combinatory_mem_Deg
import DomainTheory.DataTypesAsLattices.Lambda.ofNat_more
import DomainTheory.DataTypesAsLattices.Enumeration.Icomb_SK
import DomainTheory.DataTypesAsLattices.Lambda.Scomb_more
import DomainTheory.DataTypesAsLattices.Lambda.Kcomb_more

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

open Encodable
open Nat.Partrec (Code)
open Nat.Partrec.Code

namespace theorem_3_6

theorem finite (xs : List Pomega) :
    packList xs ∈ Deg (singleGenerator xs) ∧
      Gcomb ∈ Deg (singleGenerator xs) := by
  constructor
  · refine ⟨funOf (funOf Scomb Icomb_SK) (funOf Kcomb zeroC),
      .app (.app .S (.app (.app .S .K) .K)) (.app .K .zero), ?_⟩
    rw [Scomb.beta3, Icomb_SK.app, Kcomb.beta2, singleGenerator.app_zero]
  · exact (Deg.isSubalgebra (singleGenerator xs)).out.1

theorem converse (x : Pomega) :
```

```
    x ∈ Deg (singleGenerator [x]) := by
  have hp := (theorem_3_6.finite [x]).1
  have h0 := combinatory_mem_Deg (singleGenerator [x]) (ofNat.combinatory 0)
  have : funOf (packList [x]) (ofNat 0) ∈ Deg (singleGenerator [x]) :=
    (Deg.isSubalgebra _).out.2 hp h0
  simpa [packList.cons_zero] using this

theorem degree (a : Pomega) :
    Subalgebra (Deg a) ∧ a ∈ Deg a :=
  ⟨Deg.isSubalgebra a, Deg.self a⟩

end theorem_3_6

end DomainTheory.DataTypesAsLattices
```

2.4.15 Theorem 3.7 ✓

Among the subsets of $\mathbf{P}\omega$ with natural mathematical structure, we of course have $\mathbf{FUN}$, which is a semigroup under $\circ = \lambda u \lambda v \lambda x.\, u(v(x))$. It is, however, a rather complicated semigroup. We introduce for its study three new combinators:

$$\mathbf{R} = \lambda x.\, \langle 0, x\rangle; \tag{3.13}$$

$$\mathbf{L} = \lambda x.\, x_1(x_2); \tag{3.14}$$

$$\bar{u} = \lambda x.\, x_0 \supset \langle 1, u, x_1\rangle,\ \overline{u(x_1)(x_2)}. \tag{3.15}$$

THEOREM 3.7 (The semigroup theorem). The countable semigroup $\mathbf{RE} \cap \mathbf{FUN}$ of computable enumeration operators is finitely generated by $\mathbf{R}$, $\mathbf{L}$ and $\bar{\mathbf{G}}$.

The proof rests on the verification of two equations which permit an application of Theorem 3.1:

$$\mathbf{L} \circ \bar{u} \circ \mathbf{R} = \lambda x.\, u(x) \tag{3.16}$$

$$\bar{u} \circ \bar{v} \circ \mathbf{R} = \overline{u(v)}. \tag{3.17}$$

Certainly the word problem for $\mathbf{RE} \cap \mathbf{FUN}$ is unsolvable, indeed, not even recursively enumerable. Can the semigroup be generated by *two* generators by the way?

Proof of Theorem 3.7. We first establish (3.16) and (3.17):

$$\begin{aligned}\mathbf{L} \circ \bar{u} \circ \mathbf{R} &= \lambda x.\, \mathbf{L}(\bar{u}(\langle 0, x\rangle)) \\ &= \lambda x.\, \mathbf{L}(\langle 1, u, x\rangle) \\ &= \lambda x.\, u(x).\end{aligned}$$

$$\begin{aligned}\bar{u} \circ \bar{v} \circ \mathbf{R} &= \lambda x.\, \bar{u}(\bar{v}(\langle 0, x\rangle)) \\ &= \lambda x.\, \bar{u}(\langle 1, v, x\rangle)\end{aligned}$$

$$= \lambda x.\, \overline{u(v)}(x)$$
$$= \overline{u(v)}.$$

Now starting with any $u \in \mathbf{RE}$, we write $u = \tau$, where τ is formed from $\mathbf{G}$ by application alone. By (3.17), we can write $\bar{u}$ in terms of $\bar{\mathbf{G}}$ and $\mathbf{R}$ using only $\circ$. That is, $\bar{u}$ belongs to a special subsemigroup. In view of (3.16), we find that $\lambda x.\, u(x)$ belongs to that generated by $\mathbf{R}$, $\mathbf{L}$ and $\bar{\mathbf{G}}$. But

$$\mathbf{RE} \cap \mathbf{FUN} = \{\lambda x.\, u(x) \mid u \in \mathbf{RE}\},$$

and so the theorem is proved.

Formalization. Write $\circ$ for composition of enumeration operators. Say an element is *semigroup-generated* when it lies in the least class containing $\mathbf{R}$, $\mathbf{L}$ and $\bar{\mathbf{G}}$ and closed under $\circ$. Scott's claim is that this class coincides with $\mathbf{RE} \cap \mathbf{FUN}$.

Theorem (`theorem_3_7.equations`). For all u, v, x,

$$\mathbf{L}(\bar{u}(\mathbf{R}(x))) = u(x),$$

and writing $\langle 1, v, x\rangle$ for the positive branch of $\bar{v}$ at $\mathbf{R}(x)$,

$$\langle 1, v, x\rangle_1 = v, \qquad \langle 1, v, x\rangle_2 = x.$$

Proof. The first identity is (3.16) after evaluating $\bar{u}$ at $\mathbf{R}(x) = \langle 0, x\rangle$, which takes the positive branch $\langle 1, u, x\rangle$; $\mathbf{L}$ then applies the first component to the second. The two projection equations are the components of that same coded triple, as used in the calculation of (3.17). ■

Theorem (`theorem_3_7.generation`). If $u \in \mathbf{RE} \cap \mathbf{FUN}$, then u is semigroup-generated.

Proof. By Theorem 3.1, u is obtained from $\mathbf{G}$ by application alone, so $\bar{u}$ is obtained from $\bar{\mathbf{G}}$ and $\mathbf{R}$ by composition, using (3.17) inductively. Then $\mathbf{L} \circ \bar{u} \circ \mathbf{R}$ is semigroup-generated, and (3.16) identifies that composite with the graph $\lambda x.\, u(x)$. Since $u \in \mathbf{FUN}$, this graph is u itself. ■

Theorem (`theorem_3_7`). $u \in \mathbf{RE} \cap \mathbf{FUN}$ if and only if u is semigroup-generated.

Proof. One direction is the preceding generation lemma. Conversely, each of $\mathbf{R}$, $\mathbf{L}$ and $\bar{\mathbf{G}}$ is r.e. and functional, and $\mathbf{RE} \cap \mathbf{FUN}$ is closed under composition, so every semigroup-generated element lies in the intersection. ■

theorem_3_7.lean

```
module

public import DomainTheory.DataTypesAsLattices.Enumeration.GeneratedSemigroup
public import DomainTheory.DataTypesAsLattices.Enumeration.RE

import DomainTheory.DataTypesAsLattices.Enumeration.bar_generated
import DomainTheory.DataTypesAsLattices.Enumeration.eq_3_17
import DomainTheory.DataTypesAsLattices.Enumeration.eq_3_16
import DomainTheory.DataTypesAsLattices.Enumeration.generatedSemigroup_mem_RE_FUN
import DomainTheory.DataTypesAsLattices.Enumeration.theorem_3_1

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices
```

```
open Encodable
open Nat.Partrec (Code)
open Nat.Partrec.Code

namespace theorem_3_7

theorem equations (u v x : Pomega) :
    funOf Lcomb (funOf (funOf barComb u) (funOf Rcomb x)) = funOf u x ∧
      funOf (barPos v (funOf Rcomb x)) (ofNat 1) = v ∧
        funOf (barPos v (funOf Rcomb x)) (ofNat 2) = x :=
  ⟨eq_3_16.bar u x, (eq_3_17.projections u v x).2.1,
    (eq_3_17.projections u v x).2.2⟩

theorem generation {u : Pomega}
    (huRE : u ∈ RE) (huFUN : u ∈ FUN) : GeneratedSemigroup u := by
  have hbar : GeneratedSemigroup (funOf barComb u) :=
    bar_generated ((theorem_3_1 (u := u)).mp huRE)
  have hgen : GeneratedSemigroup
      (enumComp Lcomb (enumComp (funOf barComb u) Rcomb)) :=
    .comp .L (.comp hbar .R)
  rw [eq_3_16.operator] at hgen
  simpa [FUN] using huFUN ▶ hgen

end theorem_3_7

theorem theorem_3_7 {u : Pomega} :
    u ∈ RE ∩ FUN ↔ GeneratedSemigroup u :=
  ⟨fun h => theorem_3_7.generation h.1 h.2, generatedSemigroup_mem_RE_FUN⟩

end DomainTheory.DataTypesAsLattices
```

2.5 Retracts and data types

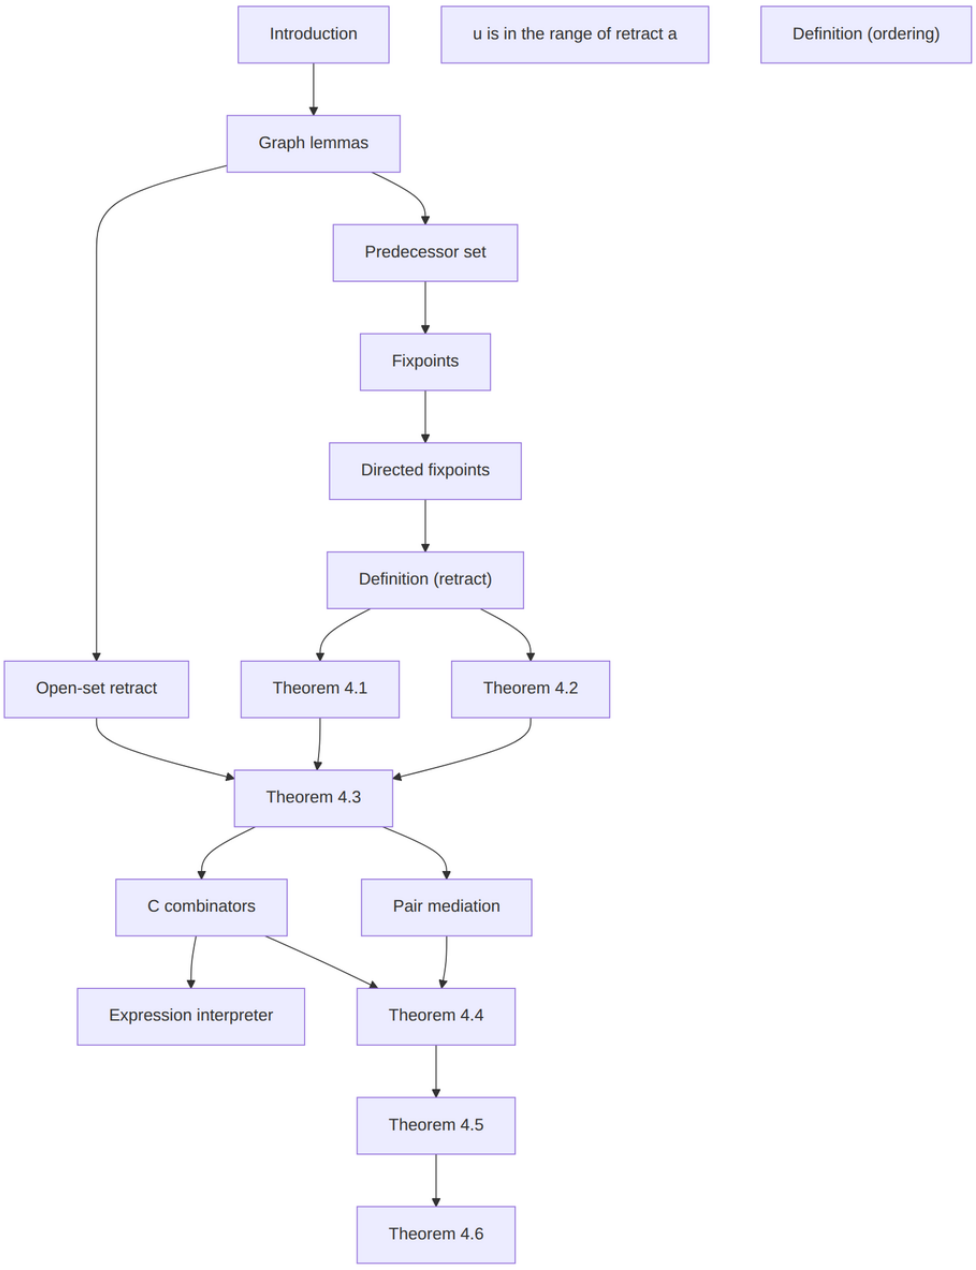

Figure 32: Retracts and data types.

2.5.1 Introduction ✓

Historical note. A retract is an ordinary notion of topology. The use of computable retracts as data types, the operations on those retracts, and the recursive definitions by fixed-point equations are Scott's. A continuous lattice, in the sense of Scott (1972), has continuous meet and join, and as a space it is a T_0-space satisfying

the extension theorem. The connection between lattices and fixed points was already known. The set of all retracts is a complete lattice by Theorem 4.1, and it is not itself a continuous lattice. Ershov solved that question after the body of the paper was written; Hosono and Sato (1975) found essentially the same argument independently. The argument is given with the ordering of retracts. The correspondence was Scott's introduction to Ershov's numeration theory. Applications to the semantics of flow diagrams are in Scott (1971), and were taken up by Goguen et al. (1975) and by Reynolds (1974).

Data can be structured in many ways: ordered tuples, lists, arrays, trees, streams, and even operations and functions. The last point becomes clear if one thinks of *parameters*. We would normally hardly consider the pairing function $\lambda x \lambda y.\, \langle x, y \rangle$ as being in itself a piece of data. But if we treat the first variable as a *parameter*, then it can be specialized to a *fixed value*, say the element a, producing the function $\lambda y.\, \langle a, y \rangle$. This function is more likely to be the output of some process and *in itself* can be considered as a datum. It is rather like one *whole row* of a matrix. If we were to regard a two-argument function f as being a matrix, then its ath row would be exactly $\lambda y.\, f(a)(y)$. If s were a selection function, then, for example, $\lambda y.\, f(s(y))(y)$ would represent the selection of one element out of each column of the matrix. This selection could be taken as a specialization of parameters in the operator $\lambda u \lambda v \lambda y.\, u(v(y))(y)$. We have not been very definite here about the exact nature of the fixed a, f, or s, or the range of the variable y or the range of values of the function f. The point is only to recall a few elements of structure and to suggest an abstract view of data going beyond the usual iterated arrays and trees.

What then is a *data type*? Answer: a type of data. That is to say, a collection of data that have been grouped together for reasons of similarity of structure or perhaps mere convenience. Thus the collection may very well be a mixed bag, but more often than not canons of taste or demands of simplicity dictate an adherence to regularity. The grouping may be formed to eliminate irrelevant objects and focus the attention in other ways. It is frequently a matter of good organization that aids the understanding of complex definitions. In programming languages, one of the major reasons for making an explicit declaration of a data type (that is, the restriction of certain variables to certain *"modes"*) is that the computed objects of that type can enjoy a special *representation* in the machine that allows the manipulation of these objects via the chosen representation to be reasonably efficient. This is a very critical matter for good language design and good compiler writing. In this report, however, we cannot discuss the problems of representation,

important as they may be. Our objective here is conceptual organization, and we wish to show how such ideas, in the language for computable functions used here, can find the proper expression.

Which are the data types that can be defined in LAMBDA? No final answer can be given since the number is infinite and inexhaustible. From one point of view, however, there is only one: $\mathbf{P}\omega$ itself. It is the universal type and all other types are subtypes of it; so $\mathbf{P}\omega$ plays a primary role in this exposition. But in a way it is too big, or at least too complex, since each of its elements can be used in so many different ways. When we specify a subtype the intention is to restrict attention to a special use. But even the various subtypes overlap, and so the same elements still get different uses. Style in writing definitions will usually make the differentiation clear though. The main innovation to be described in this section is the use of LAMBDA expressions to define types *as well as* elements. Certain expressions define *retracts* (or better: retraction mappings), and it is the *ranges* (or as we shall see: *sets of finite points*) of such retracts that form the groupings into types. Thus LAMBDA provides a calculus of type definitions including *recursive* type definitions. Examples will be explained both here and in the following sections. Note that types as retracts turn out to be types as *lattices*, that is, types of partial and many-valued objects. The problem of cutting these lattice types down to the perfect or complete objects is discussed in § 6. Another view of types and functionality of mappings is presented in § 7.

The notion of a retract comes from (analytic) topology, but it seems almost an accident that the idea can

be applied in the present context. The word is employed not because there is some deep tie-up with topology but because it is short and rather descriptive. Three easy examples will motivate the general plan:

2.5.2 Graph lemmas ✓

Two elementary graph identities used throughout the retract constructions.

Theorem (`graph_ext`). If $f(x) = g(x)$ for all x, then $\mathrm{graph}(f) = \mathrm{graph}(g)$.

Proof. Unfold the graph coding; the pointwise equality rewrites the defining set. ■

Theorem (`graph_const_bot`). The graph of the constant map with value $\bot$ is $\bot$.

Proof. No coded pair lies in the empty set. ■

`graphLemmas.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem graph_ext {f g : Pomega → Pomega} (h : ∀ x, f x = g x) :
    graph f = graph g := by
  simp [graph, h]

theorem graph_const_bot : graph (fun _ => botElem) = botElem := by
  ext p
  simp [graph, botElem]

end DomainTheory.DataTypesAsLattices
```

2.5.3 Predecessor set ✓

Predecessor-set identities for numerals, used when building integer retracts.

Theorem (`predSet_ofNat_zero`). $\mathrm{predSet}(0) = \bot$.

Proof. The predecessor of the singleton $\{0\}$ is empty. ■

Theorem (`predSet_eq_ofNat_of_no_zero`). If $0 \notin u$ and $\mathrm{predSet}(u) = k$, then $u = k + 1$ as numerals.

Proof. Members of u are successors; the predecessor condition forces each to be exactly $k + 1$, and conversely $k + 1$ has predecessor k. ■

`predSet.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Lambda.Language

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem predSet_ofNat_zero : predSet (ofNat 0) = botElem := by
```

```
  ext k
  simp [predSet, ofNat, botElem, Set.mem_singleton_iff]

theorem predSet_eq_ofNat_of_no_zero {u : Pomega} {k : ℕ}
    (h0 : 0 ∈ u) (hk : predSet u = ofNat k) :
    u = ofNat (k + 1) := by
  ext m
  constructor
  · intro hm
    have hm0 : m = 0 := fun h => h0 (by simpa [h] using hm)
    obtain ⟨t, rfl⟩ := Nat.exists_eq_succ_of_ne_zero hm0
    have : t ∈ predSet u := hm
    have : t = k := by
      have : t ∈ ofNat k := by rwa [hk] at this
      simpa [ofNat, Set.mem_singleton_iff] using this
    simp [ofNat, Set.mem_singleton_iff, this]
  · intro hm
    simp [ofNat, Set.mem_singleton_iff] at hm
    subst hm
    have : k ∈ predSet u := by
      rw [hk]; simp [ofNat, Set.mem_singleton_iff]
    exact this

end DomainTheory.DataTypesAsLattices
```

2.5.4 Fixpoints ✓

The fixed-point set of a continuous self-map of $\mathbf{P}\omega$ is the carrier of Theorem 4.1.

Definition (`Fixpoints`). $\mathrm{Fixpoints}(f) = \{x \mid f(x) = x\}$.

Definition (`Fixpoints.vals`). For a set A of fixed points (as a subtype), $\mathrm{vals}(A)$ is the underlying set of elements of $\mathbf{P}\omega$.

Theorem (`Fixpoints.vals.subset`). $\mathrm{vals}(A) \subseteq \mathrm{Fixpoints}(f)$.

Proof. Each element of $\mathrm{vals}(A)$ is the underlying point of some fixed-point witness. ■

`Fixpoints.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.eDense

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def Fixpoints (f : Pomega → Pomega) : Set Pomega :=
  {x | f x = x}

def Fixpoints.vals {f : Pomega → Pomega} (A : Set (Fixpoints f)) : Set Pomega :=
  Subtype.val '' A

namespace Fixpoints.vals

theorem subset {f : Pomega → Pomega} (A : Set (Fixpoints f)) :
    Fixpoints.vals A ⊆ Fixpoints f := by
```

```
  intro x hx
  obtain ⟨y, _, rfl⟩ := hx
  exact y.property

end Fixpoints.vals

end DomainTheory.DataTypesAsLattices
```

2.5.5 Directed fixpoints ✓

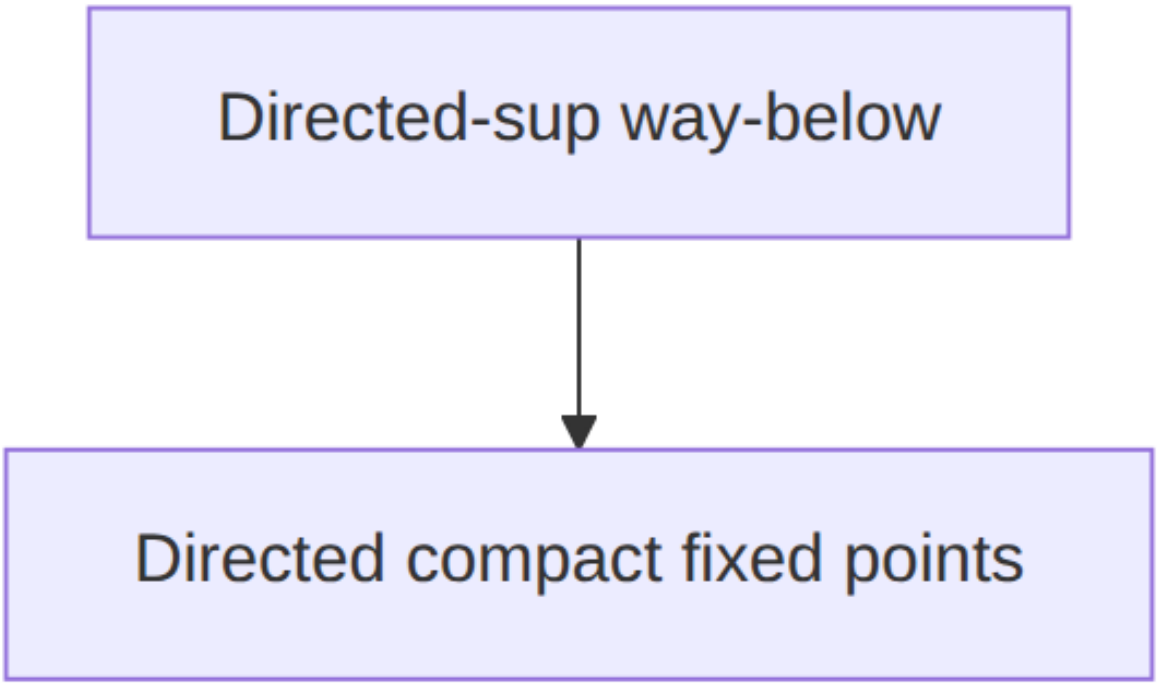

Figure 33: Directed fixpoints ✓.

Directed-sup way-below ✓ The directed-sup form of the way-below relation, used when a retract's fixed-point lattice is treated as a continuous lattice. Distinct from the Continuous Lattice chapter's Scott-open $\ll$.

Definition (`completeLatticeLE`, `completeLatticePreorder`, `completeLatticeSupSet`). The order, preorder, and supremum structures of a complete lattice, named for inference.

Definition (`DirectedSet`). A nonempty set in a preorder is directed when any two elements have a common upper bound in the set.

Definition (`WayBelow`). $x \ll y$ when every directed set whose supremum is at least y already has a member above x.

`WayBelow.lean`

```
module
```

```
public import Mathlib.Order.CompleteLattice.Defs
public import Mathlib.Data.Finset.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

abbrev completeLatticeLE {α : Type u} [CompleteLattice α] : LE α :=
  @Preorder.toLE α
    (@PartialOrder.toPreorder α
      (@CompleteSemilatticeInf.toPartialOrder α
        (@CompleteLattice.toCompleteSemilatticeInf α ?_?)))

abbrev completeLatticePreorder {α : Type u} [CompleteLattice α] : Preorder α :=
  @PartialOrder.toPreorder α
    (@CompleteSemilatticeInf.toPartialOrder α
      (@CompleteLattice.toCompleteSemilatticeInf α ?_?))

abbrev completeLatticeSupSet {α : Type u} [CompleteLattice α] : SupSet α :=
  @CompleteSemilatticeSup.toSupSet α
    (@CompleteLattice.toCompleteSemilatticeSup α ?_?)

class DirectedSet {α : Type u} [Preorder α] (s : Set α) : Prop where
  out : s.Nonempty ∧
    ∀ {{x}}, x ∈ s → ∀ {{y}}, y ∈ s →
      ∃ z ∈ s, x ≤ z ∧ y ≤ z

/-- Directed-sup form of ≪ (for fixed-point lattices in `Pω`).
    Distinct from the Continuous Lattice chapter?s Scott-open ≪. -/
def WayBelow {α : Type u} [CompleteLattice α] (x y : α) : Prop :=
  ∀ s : Set α, @DirectedSet α completeLatticePreorder s →
    @LE.le α completeLatticeLE y (@sSup α completeLatticeSupSet s) →
    ∃ z ∈ s, @LE.le α completeLatticeLE x z

end DomainTheory.DataTypesAsLattices
```

Directed compact fixed points ✓ Directed families of fixed points of a continuous self-map of $\mathbf{P}\omega$, and the compactness property used for continuous retract lattices.

Definition (`DirectedSubset`). A nonempty set s of fixed points of f is directed when any two members have an upper bound in s under $\subseteq$.

Definition (`IsCompactSubset`). A fixed point x is compact (relative to f) when every directed family of fixed points whose union covers x has a single member that already covers x.

Theorem (`directed_finite_cover`). If A is a directed set of fixed points and $t \subseteq \mathbf{P}\omega$ is finite and contained in $\bigcup \mathrm{vals}(A)$, then some $z \in A$ already contains t.

Proof. Induct on the finite set: the empty set is covered by any member of the nonempty directed family; for an inserted point, take upper bounds for the inductive cover and for a witness covering the new point. ■

DirectedSubset.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedLattices.WayBelow
```

```
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import DomainTheory.DataTypesAsLattices.Retracts.Fixpoints
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

class DirectedSubset {f : Pomega → Pomega} (s : Set (Fixpoints f)) : Prop where
  out : s.Nonempty ∧
    ∀ {{x}}, x ∈ s → ∀ {{y}}, y ∈ s →
      ∃ z ∈ s, (x : Pomega) ⊆ z ∧ (y : Pomega) ⊆ z

def IsCompactSubset {f : Pomega → Pomega} (x : Fixpoints f) : Prop :=
  ∀ s : Set (Fixpoints f),
    DirectedSubset s →
      (x : Pomega) ⊆ ⋃₀ (Subtype.val '' s) →
      ∃ z ∈ s, (x : Pomega) ⊆ z

theorem directed_finite_cover {A : Set (Fixpoints f)}
    (hA : DirectedSet A) {t : Pomega} (ht : t.Finite)
    (hsub : t ⊆ ⋃₀ (Fixpoints.vals A)) :
    ∃ z ∈ A, t ⊆ z := by
  classical
  have aux : ∀ s : Finset ℕ,
      (s : Set ℕ) ⊆ ⋃₀ (Fixpoints.vals A) →
        ∃ z ∈ A, (s : Set ℕ) ⊆ z := by
    intro s
    induction s using Finset.induction with
    | empty =>
        intro _
        obtain ⟨z, hz⟩ := hA.out.1
        exact ⟨z, hz, by simp⟩
    | insert k s hks ih =>
        intro hs
        obtain ⟨u, hu, hsu⟩ :=
          ih (fun m hm => hs (by simp [hm]))
        obtain ⟨v, hv, hkv⟩ :=
          Set.mem_sUnion.mp
            (hs (show k ∈ (insert k s : Finset ℕ) by simp))
        obtain ⟨v', hv'A, rfl⟩ := hv
        obtain ⟨z, hz, huz, hvz⟩ := hA.out.2 hu hv'A
        refine ⟨z, hz, ?_⟩
        intro m hm
        simp only [Finset.coe_insert, Set.mem_insert_iff] at hm
        rcases hm with rfl | hm
        · exact hvz hkv
        · exact huz (hsu hm)
  obtain ⟨z, hzA, hz⟩ := aux ht.toFinset (by simpa using hsub)
  exact ⟨z, hzA, fun m hm => hz (by simpa using hm)⟩

end DomainTheory.DataTypesAsLattices
```

2.5.6 Definition (retract) ✓

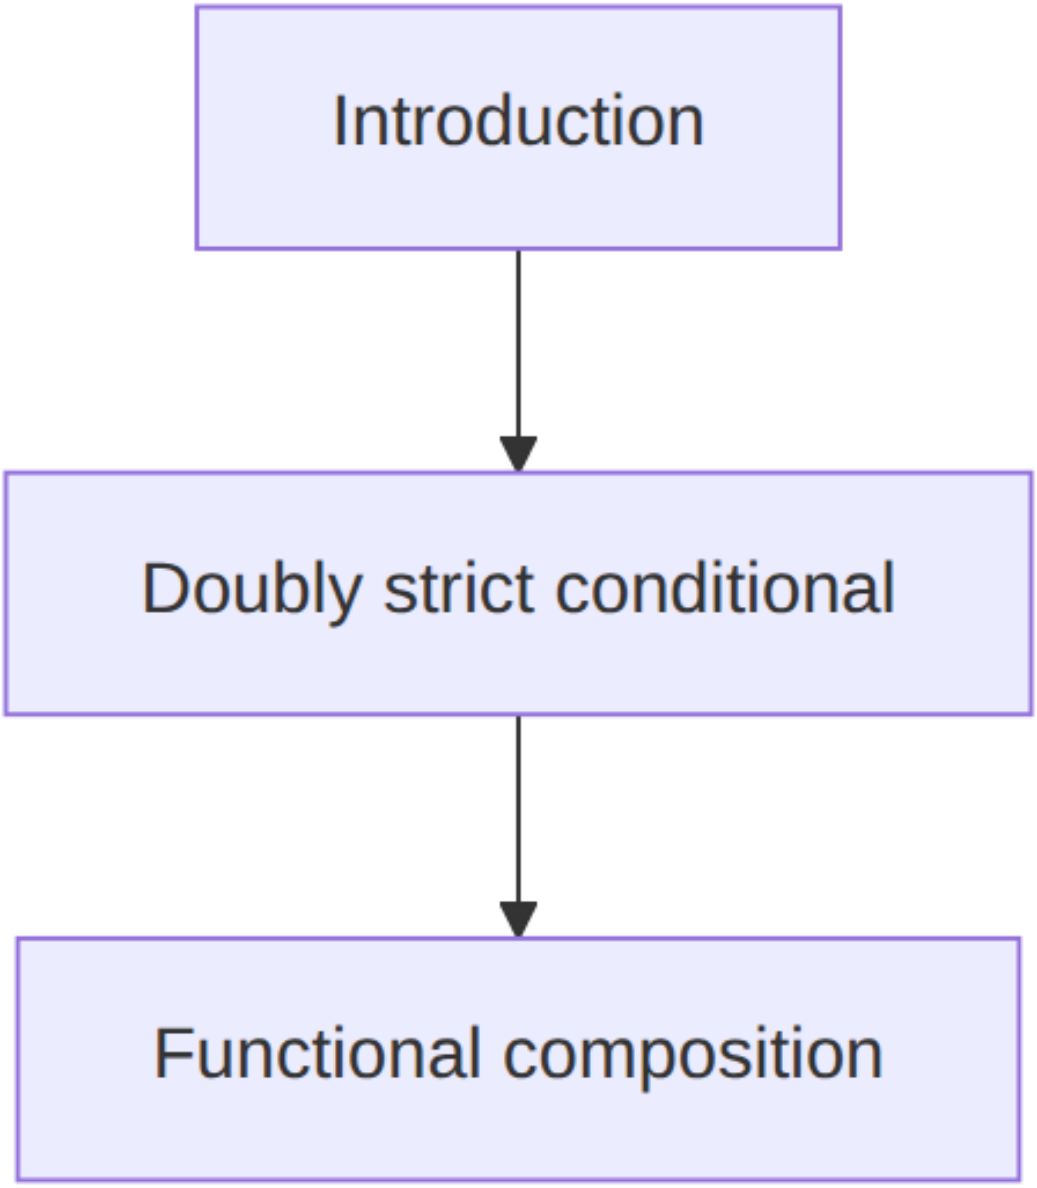

Figure 34: Definition (retract) ✓.

Introduction ✓ **DEFINITION.** An element $a \in \mathbf{P}\omega$ is called a *retract* iff it satisfies the equation $a = a \circ a$.

Of course the $\circ$-notation is used for functional composition in the standard way:

$$(4.5)\quad u \circ v = \lambda x.\, u(v(x)).$$

Consider these combinators:

$$(4.1)\quad \mathbf{fun} = \lambda u \lambda x.\, u(x);$$

$$(4.2)\quad \mathbf{pair} = \lambda u.\, \langle u_0, u_1 \rangle;$$

$$(4.3)\quad \mathbf{bool} = \lambda u.\, u \sqsupset 0, 1.$$

Here $\sqsupset$ is the *doubly strict conditional* defined by

$$(4.4)\quad z \sqsupset x, y = z \supset (z \supset x, \top), (z \supset \top, y),$$

which has the property that if z is both zero and positive, then it takes the value $\top$ instead of the value $x \cup y$.

It is quite simple to prove that each of the three combinators in (4.1)–(4.3) is a retract according to the definition. But what is the point?

Consider $\mathbf{fun}$. No matter what $u \in \mathbf{P}\omega$ we take, $\mathbf{fun}(u)$ is (the graph of) a *function*. And if u already is (the graph of) a function, then $u = \mathbf{fun}(u)$. That is to say, the range of $\mathbf{fun}$ is the same as the set of fixed points of $\mathbf{fun}$ is the same as the set of all (graphs of) functions. Any mapping a whose range and fixed-point set

coincide satisfies $a = a \circ a$, and conversely. A retract is a mapping which "retracts" the whole space onto its range and which is the identity mapping on its range. That is the import of the equation $a = a \circ a$. Strictly speaking, the range is the retract and the mapping is the retraction, but for us the mapping is more important. (Note, however, that distinct retracts can have the same range.) We let the mapping stand in for the range.

Thus the combinator **fun** represents in itself the concept of a *function* (continuous function on $\mathbf{P}\omega$ into $\mathbf{P}\omega$). Similarly **pair** represents the idea of a *pair* and **bool** the idea of being a boolean value as an element of $\{\bot, 0, 1, \top\}$, since we must think in the multiple-valued mode. What is curious (and, as we shall see, useful) is that all these retracts which are defining subspaces are at the same time elements of $\mathbf{P}\omega$.

Doubly strict conditional ✓ The doubly strict conditional of (4.4), used to define $\mathbf{bool}$.

Definition (`dcondSet`). For $z, x, y \in \mathbf{P}\omega$,

$$z \sqsupset x, y \;=\; z \supset \big(z \supset x,\, \top\big),\; \big(z \supset \top,\, y\big).$$

Equivalently, nest McCarthy's conditional: test z for zero, and on each branch test z again against $\top$ so that a mixed tag (both zero and positive) yields $\top$ instead of $x \cup y$.

Theorem (`dcondSet.isScottContinuous_left`). For fixed x, y, the map $z \mapsto z \sqsupset x, y$ is Scott-continuous.

Proof. Composition of continuous McCarthy conditionals (in each argument) with the continuous identity and the continuous maps $z \mapsto z \supset x, \top$ and $z \mapsto z \supset \top, y$. ■

Theorem (`dcondSet.isScottContinuous_mid`). For fixed z, y, the map $x \mapsto z \sqsupset x, y$ is Scott-continuous.

Proof. As a composite of continuous conditionals in the middle argument. ■

Theorem (`dcondSet.isScottContinuous_right`). For fixed z, x, the map $y \mapsto z \sqsupset x, y$ is Scott-continuous.

Proof. As a composite of continuous conditionals in the right argument. ■

Theorem (`dcondSet.bot`). $\bot \sqsupset x, y = \bot$.

Proof. Both nested conditionals see an empty tag, so the result is empty. ■

Theorem (`dcondSet.cases`). For any z, exactly one of the following holds: z is a pure zero tag ($0 \in z$ and no positive); a pure positive tag ($0 \notin z$ and some $k{+}1 \in z$); mixed (both); or empty (neither).

Proof. Case-split on membership of 0 and of some successor. ■

Theorem (`dcondSet.of_empty`). If z is empty (neither zero nor positive), then $z \sqsupset x, y = \bot$.

Proof. Neither branch of the outer conditional can fire. ■

Theorem (`dcondSet.of_zero_not_pos`). If z is a pure zero tag, then $z \sqsupset x, y = x$.

Proof. The outer test takes the "zero" branch; the inner $z \supset x, \top$ collapses to x, while the unused right branch is $\top$. ■

Theorem (`dcondSet.of_pos_not_zero`). If z is a pure positive tag, then $z \sqsupset x, y = y$.

Proof. Symmetrically: the outer test takes the "positive" branch, and $z \supset \top, y$ collapses to y. ■

Theorem (`dcondSet.of_mixed`). If z is mixed, then $z \sqsupset x, y = \top$.

Proof. Both inner conditionals evaluate to $\top$ (each has a live tag forcing the $\top$ arm), so the outer conditional yields $\top$. ■

Theorem (`dcondSet.ofNat_zero`). $0 \sqsupset x, y = x$.

Proof. The numeral 0 is a pure zero tag. ■

Theorem (`dcondSet.ofNat_one`). $1 \sqsupset x, y = y$.

Proof. The numeral 1 is a pure positive tag. ■

Theorem (`dcondSet.ofNat_succ`). For every n, $(n{+}1) \sqsupset x, y = y$.

Proof. Every positive numeral is a pure positive tag. ■

Theorem (`dcondSet.top`). $\top \sqsupset x, y = \top$.

Proof. $\top$ is mixed (contains 0 and every successor). ■

Theorem (`dcondSet.bool_idem`). $(u \sqsupset 0, 1) \sqsupset 0, 1 \;=\; u \sqsupset 0, 1$.

Proof. By the four cases on u: pure zero gives $0 \sqsupset 0, 1 = 0$; pure positive gives $1 \sqsupset 0, 1 = 1$; mixed gives $\top \sqsupset 0, 1 = \top$; empty gives $\bot \sqsupset 0, 1 = \bot$. In each case a second $\sqsupset 0, 1$ is the identity on that value. ■

`dcondSet.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Lambda.condSet
import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_3
import DomainTheory.DataTypesAsLattices.Lambda.id_isScottContinuous

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

/-- Doubly strict conditional (Scott (4.4)):
    `z ? x, y = z ? (z ? x, ⊤), (z ? ⊤, y)`. -/
def dcondSet (z x y : Pomega) : Pomega :=
  condSet z (condSet z x topElem) (condSet z topElem y)

namespace dcondSet
```

```
theorem isScottContinuous_left (x y : Pomega) :
    IsScottContinuous (fun z => dcondSet z x y) :=
  theorem_1_3.nary
    (fun y z => condSet.isScottContinuous_left y z)
    (fun x z => condSet.isScottContinuous_mid x z)
    (fun x y => condSet.isScottContinuous_right x y)
    id_isScottContinuous
    (condSet.isScottContinuous_left x topElem)
    (condSet.isScottContinuous_left topElem y)

theorem bot (x y : Pomega) : dcondSet botElem x y = botElem := by
  ext n
  simp [dcondSet, condSet, botElem]

theorem cases (z : Pomega) :
    (0 ∈ z ∧ ¬ ∃ k, k + 1 ∈ z) ∨
      (0 ∈ z ∧ ∃ k, k + 1 ∈ z) ∨
        (0 ∈ z ∧ ∃ k, k + 1 ∈ z) ∨
          (0 ∈ z ∧ ¬ ∃ k, k + 1 ∈ z) := by
  by_cases h0 : 0 ∈ z
  · by_cases hp : ∃ k, k + 1 ∈ z
    · exact Or.inr (Or.inr (Or.inl ⟨h0, hp⟩))
    · exact Or.inl ⟨h0, hp⟩
  · by_cases hp : ∃ k, k + 1 ∈ z
    · exact Or.inr (Or.inl ⟨h0, hp⟩)
    · exact Or.inr (Or.inr (Or.inr ⟨h0, hp⟩))

theorem isScottContinuous_mid (z y : Pomega) :
    IsScottContinuous (fun x => dcondSet z x y) :=
  theorem_1_3 (f := fun w => condSet z w (condSet z topElem y))
    (g := fun x => condSet z x topElem)
    (condSet.isScottContinuous_mid z (condSet z topElem y))
    (condSet.isScottContinuous_mid z topElem)

theorem isScottContinuous_right (z x : Pomega) :
    IsScottContinuous (fun y => dcondSet z x y) :=
  theorem_1_3 (f := fun w => condSet z (condSet z x topElem) w)
    (g := fun y => condSet z topElem y)
    (condSet.isScottContinuous_right z (condSet z x topElem))
    (condSet.isScottContinuous_right z topElem)

theorem of_empty {z x y : Pomega}
    (h0 : 0 ∈ z) (hp : ¬ ∃ k, k + 1 ∈ z) :
    dcondSet z x y = botElem := by
  ext n
  constructor
  · intro hn
    rcases hn with ⟨_, hz⟩ | ⟨_, ht⟩
    · exact (h0 hz).elim
    · exact (hp ht).elim
  · intro hn
    simp [botElem] at hn

theorem of_mixed {z x y : Pomega}
    (h0 : 0 ∈ z) (hp : ∃ k, k + 1 ∈ z) :
```

```
    dcondSet z x y = topElem := by
  have hL : condSet z x topElem = topElem := by
    ext n
    constructor
    · intro _; exact Set.mem_univ n
    · intro _; exact Or.inr ⟨Set.mem_univ n, hp⟩
  have hR : condSet z topElem y = topElem := by
    ext n
    constructor
    · intro _; exact Set.mem_univ n
    · intro _; exact Or.inl ⟨Set.mem_univ n, h0⟩
  rw [dcondSet, hL, hR]
  ext n
  constructor
  · intro _; exact Set.mem_univ n
  · intro _; exact Or.inl ⟨Set.mem_univ n, h0⟩

theorem of_pos_not_zero {z x y : Pomega}
    (h0 : 0 ∈ z) (hp : ∃ k, k + 1 ∈ z) :
    dcondSet z x y = y := by
  have hL : condSet z x topElem = topElem := by
    ext n
    constructor
    · intro _; exact Set.mem_univ n
    · intro _; exact Or.inr ⟨Set.mem_univ n, hp⟩
  have hR : condSet z topElem y = y := by
    ext n
    constructor
    · intro hn
      rcases hn with ⟨_, hz⟩ | ⟨hy, _⟩
      · exact (h0 hz).elim
      · exact hy
    · intro hy
      exact Or.inr ⟨hy, hp⟩
  rw [dcondSet, hL, hR]
  ext n
  constructor
  · intro hn
    rcases hn with ⟨_, hz⟩ | ⟨hy, _⟩
    · exact (h0 hz).elim
    · exact hy
  · intro hy
    exact Or.inr ⟨hy, hp⟩

theorem of_zero_not_pos {z x y : Pomega}
    (h0 : 0 ∈ z) (hp : ¬ ∃ k, k + 1 ∈ z) :
    dcondSet z x y = x := by
  have hL : condSet z x topElem = x := by
    ext n
    constructor
    · intro hn
      rcases hn with ⟨hx, _⟩ | ⟨_, ht⟩
      · exact hx
      · exact (hp ht).elim
    · intro hx
      exact Or.inl ⟨hx, h0⟩
```

```
  have hR : condSet z topElem y = topElem := by
    ext n
    constructor
    · intro _; exact Set.mem_univ n
    · intro _; exact Or.inl ⟨Set.mem_univ n, h0⟩
  rw [dcondSet, hL, hR]
  ext n
  constructor
  · intro hn
    rcases hn with ⟨hx, _⟩ | ⟨_, ht⟩
    · exact hx
    · exact (hp ht).elim
  · intro hx
    exact Or.inl ⟨hx, h0⟩

theorem ofNat_one (x y : Pomega) : dcondSet (ofNat 1) x y = y := by
  ext n
  simp [dcondSet, condSet, ofNat, topElem]

theorem ofNat_succ (n : ℕ) (x y : Pomega) :
    dcondSet (ofNat (n + 1)) x y = y :=
  dcondSet.of_pos_not_zero (by simp [ofNat]) ⟨n, by simp [ofNat]⟩

theorem ofNat_zero (x y : Pomega) : dcondSet (ofNat 0) x y = x := by
  ext n
  simp [dcondSet, condSet, ofNat, topElem]

theorem top (x y : Pomega) : dcondSet topElem x y = topElem := by
  ext n
  simp [dcondSet, condSet, topElem]

/-- Idempotence of `? 0, 1` used for `bool`. -/
theorem bool_idem (u : Pomega) :
    dcondSet (dcondSet u (ofNat 0) (ofNat 1)) (ofNat 0) (ofNat 1) =
      dcondSet u (ofNat 0) (ofNat 1) := by
  rcases dcondSet.cases u with h | h | h | h
  · rw [dcondSet.of_zero_not_pos h.1 h.2, dcondSet.ofNat_zero]
  · rw [dcondSet.of_pos_not_zero h.1 h.2, dcondSet.ofNat_one]
  · rw [dcondSet.of_mixed h.1 h.2, dcondSet.top]
  · rw [dcondSet.of_empty h.1 h.2, dcondSet.bot]

end dcondSet

end DomainTheory.DataTypesAsLattices
```

Functional composition ✓ Functional composition (4.5), the retract equation, and the motivating combinators **fun** and **bool**.

Definition (`comp`). Composition of graphs is

$$u \circ v \;=\; \mathbf{graph}\big(x \mapsto u(v(x))\big),$$

Scott's equation (4.5).

Theorem (`comp.app`). $(u \circ v)(x) = u(v(x))$.

Proof. The body $x \mapsto u(v(x))$ is Scott-continuous (composite of continuous applications), so (β) applies. ■

Theorem (`comp.isScottContinuous_right`). For fixed u, the map $v \mapsto u \circ v$ is Scott-continuous.

Proof. The graphing of a family continuous in v (pointwise $x \mapsto u(v(x))$ is continuous in v) is continuous. ■

Theorem (`comp.right_const`). For fixed a, the map $u \mapsto u \circ a$ is Scott-continuous.

Proof. Likewise: $x \mapsto u(a(x))$ is continuous in u, and graphing preserves that. ■

Definition (`Retract`). An element $a \in \mathbf{P}\omega$ is a *retract* when $a = a \circ a$.

Definition (`funRetract`). Scott's $\mathbf{fun}$ of (4.1):

$$\mathbf{fun} = \mathbf{graph}\big(u \mapsto \mathbf{graph}(x \mapsto u(x))\big).$$

Theorem (`funRetract.app`). $\mathbf{fun}(u) = \mathbf{graph}(x \mapsto u(x))$.

Proof. (β): the body is continuous in u because application is continuous in the function argument. ■

Theorem (`funRetract.isRetract`). $\mathbf{fun}$ is a retract: $\mathbf{fun} = \mathbf{fun} \circ \mathbf{fun}$.

Proof. Pointwise on graphs: for each u, $\mathbf{fun}(\mathbf{fun}(u)) = \mathbf{graph}(x \mapsto \mathbf{fun}(u)(x)) = \mathbf{graph}(x \mapsto u(x)) = \mathbf{fun}(u)$, using (β) for continuous u. ■

Definition (`boolR`). Scott's $\mathbf{bool}$ of (4.3):

$$\mathbf{bool} = \mathbf{graph}\big(u \mapsto u \sqsupset 0, 1\big).$$

Theorem (`boolR.app`). $\mathbf{bool}(u) = u \sqsupset 0, 1$.

Proof. (β) from continuity of $u \mapsto u \sqsupset 0, 1$ in the left argument of $\sqsupset$. ■

Theorem (`boolR.isRetract`). $\mathbf{bool}$ is a retract: $\mathbf{bool} = \mathbf{bool} \circ \mathbf{bool}$.

Proof. Pointwise: $\mathbf{bool}(\mathbf{bool}(u)) = (u \sqsupset 0, 1) \sqsupset 0, 1 = u \sqsupset 0, 1 = \mathbf{bool}(u)$ by idempotence of $\sqsupset 0, 1$. ■

(Scott's $\mathbf{pair}$ of (4.2) is not yet a named retract module; pairing of elements is `pairSeq` elsewhere.)

`Retract.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Graph.funOf
public import DomainTheory.DataTypesAsLattices.Lambda.dcondSet
import DomainTheory.DataTypesAsLattices.Retracts.graphLemmas
import DomainTheory.DataTypesAsLattices.Lambda.graph_const_isScottContinuous
import DomainTheory.DataTypesAsLattices.Graph.beta
import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_3

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

/-- Functional composition (Scott (4.5)): `u ∘ v = λx. u(v(x))`. -/
def comp (u v : Pomega) : Pomega :=
  graph (fun x => funOf u (funOf v x))

namespace comp

theorem app (u v x : Pomega) :
```

```
    funOf (comp u v) x = funOf u (funOf v x) :=
  beta (theorem_1_3 (funOf.isScottContinuous u) (funOf.isScottContinuous v)) x

theorem isGraph (u v : Pomega) :
    comp u v = graph (fun x => funOf (comp u v) x) := by
  apply graph_ext
  intro x
  exact (comp.app u v x).symm

theorem isScottContinuous_right (u : Pomega) :
    IsScottContinuous (fun v => comp u v) :=
  graph_const_isScottContinuous (fun v x => funOf u (funOf v x))
    (fun x => theorem_1_3 (funOf.isScottContinuous u) (funOf.isScottContinuous_left x)
    )

theorem right_const (a : Pomega) :
    IsScottContinuous (fun u => comp u a) :=
  graph_const_isScottContinuous (fun u x => funOf u (funOf a x))
    (fun x => funOf.isScottContinuous_left (funOf a x))

end comp

/-- An element `a` is a retract iff `a = a ∘ a`. -/
class Retract (a : Pomega) : Prop where
  out : a = comp a a

/-- Scott?s `fun` of (4.1). -/
def funRetract : Pomega :=
  graph (fun u => graph (fun x => funOf u x))

namespace funRetract

theorem app (u : Pomega) :
    funOf funRetract u = graph (fun x => funOf u x) :=
  beta (graph_const_isScottContinuous (fun u x => funOf u x)
    (fun x => funOf.isScottContinuous_left x)) u

theorem isRetract : Retract funRetract := by
  constructor
  apply graph_ext
  intro u
  rw [funRetract.app, funRetract.app]
  apply graph_ext
  intro x
  exact (beta (funOf.isScottContinuous u) x).symm

end funRetract

/-- Scott?s `bool` of (4.3). -/
def boolR : Pomega :=
  graph (fun u => dcondSet u (ofNat 0) (ofNat 1))

namespace boolR

theorem app (u : Pomega) :
    funOf boolR u = dcondSet u (ofNat 0) (ofNat 1) :=
```

```
  beta (dcondSet.isScottContinuous_left (ofNat 0) (ofNat 1)) u

theorem isRetract : Retract boolR := by
  constructor
  apply graph_ext
  intro u
  rw [app, app, dcondSet.bool_idem]

end boolR

end DomainTheory.DataTypesAsLattices
```

2.5.7 Theorem 4.1 ✓

For Section 4. The notion of a *continuous lattice* is due to Scott (1970/71) and we shall not review all the facts here. One special feature of these lattices is that the lattice operations of meet and join ($\sqcap$ and $\sqcup$) are continuous (that is, commute with directed sups). As topological spaces, they can be characterized as those T_0-spaces satisfying the extension theorem (which we proved for $\mathbf{P}\omega$ in Theorem 1.5).

THEOREM 4.1 (The lattice theorem). The fixed points of any continuous function form a complete lattice (under $\subseteq$); while those of a retract form a continuous lattice.

Proof of Theorem 4.1. Consider a continuous function a, and let $A = \{x \mid x = a(x)\}$. By the fixed-point theorem (Theorem 1.4) we know that A is nonempty and that it has a least element under $\subseteq$. Certainly A is partially ordered by $\subseteq$; further, A is closed under *directed* unions but not under arbitrary unions.

That is, A is not a complete sublattice of $\mathbf{P}\omega$ with regard to the lattice operations of $\mathbf{P}\omega$, but it could be a complete lattice on its own—if we can show sups exist. Thus, let $S \subseteq A$ be an arbitrary subset of A. By the fixed-point theorem, find the least solution to the equation:

$$y = \bigcup\{x \mid x \in S\} \cup a(y).$$

Clearly $x \subseteq y$ for all $x \in S$; and so $x = a(x) \subseteq a(y)$, for all $x \in S$. This means that $y = a(y)$, and thus $y \in A$. By construction, then, y is an upper bound to the elements of S. Suppose $z \in A$ is another upper bound for S. It will also satisfy the above equation; thus $y \subseteq z$, and so y is the least upper bound. A partially ordered set with sups also has infs, as is well known, and is a complete lattice.

Suppose that a is a retract. We can easily show that the fixed-point set A (with the relative topology from $\mathbf{P}\omega$) satisfies the extension theorem. For assume $f : X \to A$ is continuous, and $X \subseteq Y$ as a subspace. Now we can also regard $f : X \to \mathbf{P}\omega$ as continuous because A is a subspace of $\mathbf{P}\omega$. By Theorem 1.5 there is an extension to a continuous $\bar{f} : Y \to \mathbf{P}\omega$. But then $a \circ \bar{f} : Y \to A$ is the continuous function we want for A, and the proof is complete.

The space of retracts. Let us define:

$$\mathbf{RET} = \{a \mid a = a \circ a\},$$

the set of all retracts, which is a complete lattice in view of Theorem 4.1. It will be proved to be not a retract itself by showing it is not a continuous lattice; in fact, the meet operation on $\mathbf{RET}$ is not continuous on $\mathbf{RET}$.

The proof was kindly communicated by Y. L. Ershov and rests on distinguishing some extreme cases of retracts. Call a retract a *nonextensive* if for all nonempty finite sets x we have $x \not\subseteq a(x)$. Call a retract b *finite* if all its values are finite (i.e., $b(\top)$ is finite). If a is nonextensive and b is finite, then Ershov notes that

they are "orthogonal" in **RET** in the sense that $c = a \sqcap b = \bot$. The reason is that, since $c \subseteq b$, it is finite; but $c \subseteq a$, too, so $c(x) \subseteq a(x)$ for all x. Because c is a retract, we have $c(x) = c(c(x)) \subseteq a(c(x))$. As $c(x)$ is finite and a is nonextensive, it follows that $c(x) = \bot$ for all x.

This orthogonality is unfortunate, because consider the finite retracts $b_n = \lambda x.\, e_n$. We have here a directed set of retracts where $\bigcup\{b_n \mid n \in \omega\} = \lambda x.\, \top = \top$. If $\sqcap$ were continuous, it would follow that for nonextensive a:

$$a = a \sqcap \top = a \sqcap \bigcup\{b_n \mid n \in \omega\} = \bigcup\{a \sqcap b_n \mid n \in \omega\} = \bot,$$

showing that there are no nontrivial such a. But this is not so.

Let $\ll$ be a strict linear ordering of ω in the order type of the rational numbers. Define:

$$a(x) = \{m \mid \exists n \in x.\, m \ll n\}.$$

We see at once that a is continuous; and, because $\ll$ is transitive and dense, a is a retract. Since $\ll$ is irreflexive, it is the case for finite nonempty sets x that $\max_{\ll}(x) \notin a(x)$; hence, a is nonextensive. As $a(\top) = \top$, we find $a \neq \bot$. The proof is complete.

Note that there are many transitive, dense, irreflexive relations on ω, so there are many nonextensive retracts. These retracts, like a above, are *distributive*.

A nondistributive example is:

$$a' = \{m \mid \exists n, n' \in x.\, n \ll m \ll n'\}.$$

Many other examples are possible.

theorem_4_1.lean

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.typed
public import DomainTheory.DataTypesAsLattices.Retracts.retractBasis

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_4_1

theorem complete (f : Pomega → Pomega) (hf : IsScottContinuous f)
    (A : Set Pomega) (hA : A ⊆ Fixpoints f) :
    gfpBelow f (⋂₀ A) ∈ Fixpoints f :=
  gfpBelow.mem f hf A hA

theorem continuous {a : Pomega} (ha : Retract a) :
    ∀ x : Fixpoints (funOf a),
      DirectedSubset (retractBasis a x) ∧
        (x : Pomega) = ⋃₀ (Subtype.val '' retractBasis a x) ∧
        ∀ y ∈ retractBasis a x,
          ∀ s : Set (Fixpoints (funOf a)),
            DirectedSubset s →
              (x : Pomega) ⊆ ⋃₀ (Subtype.val '' s) →
              ∃ z ∈ s, (y : Pomega) ⊆ z := by
  intro x
```

```
  refine ⟨retractBasis.directedSubset ha x, retractBasis.eq_sUnion ha x, ?_⟩
  intro y hy s hs hxs
  obtain ⟨n, hnx, hyn⟩ := hy
  have hen : e n ⊆ ⋃₀ (Subtype.val '' s) := hnx.trans hxs
  have hs' : DirectedSet s :=
    ⟨⟨hs.out.1, fun u hu v hv => by
      obtain ⟨w, hw, huw, hvw⟩ := hs.out.2 hu hv
      exact ⟨w, hw, huw, hvw⟩⟩⟩
  obtain ⟨z, hz, hnz⟩ :=
    directed_finite_cover hs' (e.finite n) (by simpa [Fixpoints.vals] using hen)
  refine ⟨z, hz, ?_⟩
  rw [hyn]
  have := IsScottContinuous.monotone (funOf.isScottContinuous a) hnz
  rwa [z.property] at this

end theorem_4_1

theorem theorem_4_1 {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    (∀ A : Set Pomega, A ⊆ Fixpoints f →
      gfpBelow f (⋂₀ A) ∈ Fixpoints f ∧
        lfpAbove f (⋃₀ A) ∈ Fixpoints f) ∧
      ∀ {a} (_ha : Retract a),
        Fixpoints (funOf a) = {x | typed x a} ∧
          ∀ x : Fixpoints (funOf a),
            DirectedSubset (retractBasis a x) ∧
              (x : Pomega) = ⋃₀ (Subtype.val '' retractBasis a x) := by
  constructor
  · intro A hA
    exact ⟨theorem_4_1.complete f hf A hA, lfpAbove.mem hf hA⟩
  · intro a ha
    constructor
    · ext x
      simp [Fixpoints, typed, eq_comm]
    · intro x
      exact ⟨retractBasis.directedSubset ha x, retractBasis.eq_sUnion ha x⟩

end DomainTheory.DataTypesAsLattices
```

2.5.8 u is in the range of retract a ✓

DEFINITION. If a is a retract, we write $u : a$ for $u = a(u)$ and $\lambda u : a.\, \tau$ for $\lambda u.\, \tau[a(u)/u]$.

Since retracts are sets in $\mathbf{P}\omega$, we cannot use the ordinary membership symbol to signify that u belongs to the range of a; so we write $u : a$. The other notation with the λ-operator restricts a function to the range of a. For f to be so restricted simply means $f = f \circ a$. For the range of f to be contained in that of the retract a means $f = a \circ f$. These algebraic equations will be found to be quite handy. We are going to have a calculus of retracts and mappings between them involving many operators on retracts yet to be discovered. Before we turn to this calculus, we recall the well-known connection between lattices and fixed points.

2.5.9 Definition (ordering) ✓

We note further that by the embedding theorem (Theorem 1.6), it follows that any separable (by which we mean countably-based) continuous lattice is a retract of $\mathbf{P}\omega$; hence, our universal space is indeed rich in

retracts. A very odd point is that $a = a \circ a$ is a fixed-point equation itself ($\lambda u.\, u \circ u$ is obviously continuous). Thus the retraction mappings form a complete lattice. Is this a continuous lattice? (Ershov has proved it is not; see the Appendix for a sketch.) A related question is solved positively in the next section. Actually the ordering of retracts under $\subseteq$ does not seem to be all that interesting; a more algebraic ordering is given by:

DEFINITION. For retracts a and b we write $a \sqsubseteq b$ for $a = a \circ b = b \circ a$.

The idea here should be clear: $a \sqsubseteq b$ means that a is a retract of b. It is easy to prove the:

2.5.10 Open-set retract ✓

An open-set retract used later when comparing retracts and Scott-open structure.

Definition (`openSetRetract`). $\mathrm{openSetRetract}$ is the graph of the map sending u to $\{m \mid \exists n.\, e_n \subseteq e_m \wedge n \in u\}$: the Scott-open sets coded by members of u.

`openSetRetract.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def openSetRetract : Pomega :=
  graph (fun u => {m | ∃ n, e n ⊆ e m ∧ n ∈ u})

end DomainTheory.DataTypesAsLattices
```

2.5.11 Theorem 4.2 ✓

THEOREM 4.2 (The partial ordering theorem). The retracts are partially ordered by $\sqsubseteq$.

There do not seem to be any lattice properties of $\sqsubseteq$ of a general nature. Note, however, that if retracts commute, $a \circ b = b \circ a$, then $a \circ b$ is the greatest lower bound under $\sqsubseteq$ of a and b. Also if we have a sequence where both $a_n \sqsubseteq a_{n+1}$ and $a_n \subseteq a_{n+1}$ for all $n \in \omega$, then $\bigcup\{a_n \mid n \in \omega\}$ is the upper bound for the a_n under $\sqsubseteq$, as can easily be argued from the definition by continuity of $\circ$.

Certainly there is no "least" retract under $\sqsubseteq$. One has $\bot = \bot \circ a$ (recall: $\bot = \lambda x.\, \bot$), but not $a \circ \bot = \bot$. This last equation means more simply that $a(\bot) = \bot$; that is, a is *strict*. For retracts strictness is thus equivalent to $\bot \sqsubseteq a$, so we can say that there is a least strict retract. The combinator $\mathbf{I} = \lambda u.\, u$ clearly represents the

largest retract (the *whole space*), and it is strict also. In a certain sense strictness can be assumed without loss of generality. For if a is not strict, let

$$b = \lambda x.\, \{n \mid a(x) \neq a(\bot)\}.$$

This function takes values in $\{\bot, \top\}$ and is continuous because $\{x \in \mathbf{P}\omega \mid a(x) \neq a(\bot)\}$ is *open*. Next define:

$$a^* = \lambda u.\, a(u) \cap b(u).$$

This is a strict retract whose range is homeomorphic (and lattice isomorphic) to that of a. Note, however, that the mapping from a to a^* is not continuous (or even monotonic).

To have a more uniform notation for retracts we shall often write **nil**, **id**, and **seq** for the combinators $\bot$, **I**, \$. Two further retracts of interest are

$$(4.6) \quad \mathbf{open} = \lambda u.\, \{m \mid \exists e_n \subseteq e_m.\, n \in u\};$$

$$(4.7) \quad \mathbf{int} = \lambda u.\, u \supset 0,\, \mathbf{int}(u-1) \supset u,\, u.$$

The range of **open** is lattice isomorphic to the lattice of open subsets of $\mathbf{P}\omega$; definition (4.6) is not a LAMBDA-definition of the retract, but such can be given.

In (4.7) we intend **int** to be the least fixed point of the equation. By induction on the least element of u (if any) one proves that:

$$\mathbf{int}(u) = \begin{cases} \bot & \text{if } u = \bot; \\ u & \text{if } u \in \omega; \\ \top & \text{otherwise.} \end{cases}$$

This retract wipes out the distinctions between multiple values, moving all above the singletons up to $\top$; its range thus has a very simple structure. The retract **int** clearly generalizes **bool**. The range of **fun** is homeomorphic to the space of all continuous functions from $\mathbf{P}\omega$ into $\mathbf{P}\omega$; the range of **pair**, to the space of all ordered pairs; the range of **seq**, to the space of all infinite sequences. A combination like $\lambda u.\, \mathbf{int} \circ \mathbf{seq}(u)$ is a retract whose range is homeomorphic to the space of infinite sequences of elements from the range of **int**.

We now wish to introduce some operators that provide systematic ways of forming new combinations of retracts. There are three principal ones:

$$(4.8) \quad a\circ \to b = \lambda u.\, b \circ u \circ a;$$

$$(4.9) \quad a \otimes b = \lambda u.\, \langle a(u_0), b(u_1)\rangle;$$

$$(4.10) \quad a \oplus b = \lambda u.\, u_0 \supset \langle 0, a(u_1)\rangle,\, \langle 1, b(u_1)\rangle.$$

These equations clearly generalize (4.1)–(4.3). Before we explain our operators, note these three equations which hold for arbitrary a, b, a', b':

$$(4.11) \quad (a\circ \to b) \circ (a'\circ \to b') = (a' \circ a)\circ \to (b \circ b');$$

$$(4.12) \quad (a \otimes b) \circ (a' \otimes b') = (a \circ a') \otimes (b \circ b');$$

$$(4.13) \quad (a \oplus b) \circ (a' \oplus b') = (a \circ a') \oplus (b \circ b').$$

The reversal of order $(a' \circ a)$ on the right-hand side of (4.11) should be remarked.

These equations will be used not only for properties of types (ranges of retracts) but also for the mappings between the types.

Proof of Theorem 4.2. The relation $\sqsubseteq$ is by the definition of retract reflexive on $\mathbf{RET}$; it is also obviously antisymmetric. To prove transitivity, suppose $a \sqsubseteq b \sqsubseteq c$, then

$$a = a \circ b = a \circ b \circ c = a \circ c.$$

Similarly, $a = c \circ a$. Note, by the way, that $a \sqsubseteq b$ implies that the range of a is included in that of b; but that the relationship $a \subseteq b$ does not imply this fact. The relationship $a \sqsubseteq b$, however, is stronger than inclusion of ranges.

theorem_4_2.lean

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.retractLe

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_4_2 {a b c : Pomega} :
    (Retract a → retractLe a a) ∧
      (retractLe a b → retractLe b a → a = b) ∧
      (retractLe a b → retractLe b c → retractLe a c) := by
  refine ⟨retractLe.refl, ?_, ?_⟩
  · intro hab hba
    exact hab.1.trans (hba.2.symm)
  · intro hab hbc
    exact retractLe.trans hab hbc

end DomainTheory.DataTypesAsLattices
```

2.5.12 Theorem 4.3 ✓

THEOREM 4.3 (The function space theorem). Suppose a, b, a', b', c are retracts. Then we have:

(i) $a\circ \to b$ is a retract, and it is strict if b is;

(ii) $u : a\circ \to b$ iff $u = \lambda x : a.\, u(x)$ and $\forall x : a.\, u(x) : b$;

(iii) if $a \sqsubseteq a'$ and $b \sqsubseteq b'$, then $a\circ \to b \sqsubseteq a'\circ \to b'$;

(iv) if $f : a\circ \to b$ and $f' : a'\circ \to b'$, then $f\circ \to f' : (b\circ \to a')\circ \to (a\circ \to b')$;

(v) if $f : a\circ \to b$ and $f' : b\circ \to c$, then $f' \circ f : a\circ \to c$.

Parts (i), (iii), (iv), and (v) can be proved using (4.8) and (4.11) in an algebraic (formal) fashion. It is (ii) that tells us what it all means: the range of $a\circ \to b$ consists exactly of those functions which are restricted to (the range of) a and which have values in b. So we can read $u : a\circ \to b$ in the normal way: u is a (continuous) mapping from a into b. In technical jargon, we can say that the (strict) retracts and continuous functions form a *category*. In fact, it is equivalent to the category of separable continuous lattices and continuous maps. In this context, (iv) shows that $\circ \to$ operates not only on spaces (retracts) but also on

maps: it is a functor contravariant in the first argument and covariant in the second. Further categorical properties will emerge.

Proofs of Theorems 4.3–4.5. We will not give full details as all the parts of these theorems are direct calculations. Consider by way of example Theorem 4.3(i). We find:

$$\begin{aligned}(a\circ \to b)\circ(a\circ \to b) &= \lambda u.\, b\circ(b\circ u\circ a)\circ a\\ &= \lambda u.\, b\circ u\circ a\\ &= a\circ \to b,\end{aligned}$$

provided that a and b are retracts. A very similar computation would verify part (iv), if one writes out the composition:

$$(a\circ \to b')\circ(f\circ \to f')\circ(b\circ \to a')$$

and uses the equations:

$$f = b\circ f\circ a \quad \text{and} \quad f' = b'\circ f'\circ a'.$$

theorem_4_3.lean

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.arrowR
public import DomainTheory.DataTypesAsLattices.Retracts.retractLe
import DomainTheory.DataTypesAsLattices.Retracts.arrowR_more
import DomainTheory.DataTypesAsLattices.Retracts.typed_more

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_4_3 {a b a' b' c : Pomega}
    (ha : Retract a) (hb : Retract b) (_ha' : Retract a')
    (_hb' : Retract b') (hc : Retract c) :
    Retract (arrowR a b) ∧
      (IsStrict b → IsStrict (arrowR a b)) ∧
      (∀ u, typed u (arrowR a b) ↔
        u = comp u a ∧ ∀ x, typed x a → typed (funOf u x) b) ∧
      (retractLe a a' → retractLe b b' →
        retractLe (arrowR a b) (arrowR a' b')) ∧
      (∀ f f', typed f (arrowR a b) → typed f' (arrowR a' b') →
        typed (arrowR f f') (arrowR (arrowR b a') (arrowR a b'))) ∧
      (∀ f f', typed f (arrowR a b) → typed f' (arrowR b c) →
        typed (comp f' f) (arrowR a c)) :=
  ⟨arrowR.isRetract ha hb, arrowR.isStrict, fun _ => typed.arrowR_iff ha hb,
    arrowR.mono, fun _ _ => arrowR.functor,
    fun _ _ hf hf' => typed.comp ha hb hc hf hf'⟩

end DomainTheory.DataTypesAsLattices
```

2.5.13 C combinators ✓

Sum and product combinators for retracts: tag tests, injections, diagonal, curry, and evaluation.

Definition (`whichC`). $\mathrm{whichC} = \mathrm{fstC}$.

Theorem (`whichC.app`). $\mathrm{whichC}\,u = u(0)$.

Proof. The first-projection law. ■

Definition (`outC`). $\mathrm{outC} = \mathrm{sndC}$.

Definition (`outleftC`). $\mathrm{outleftC}$ is the graph of $u \mapsto \mathrm{cond}(u(0),\, u(1),\, \bot)$.

Theorem (`outleftC.isScottContinuous`). That body map is Scott-continuous.

Proof. Continuity of the conditional in its first two arguments along continuous projections. ■

Theorem (`outleftC.app`). Applying $\mathrm{outleftC}$ recovers the conditional body.

Proof. The β-law for the continuous body. ■

Definition (`outrightC`). $\mathrm{outrightC}$ is the graph of $u \mapsto \mathrm{cond}(u(0),\, \bot,\, u(1))$.

Theorem (`outrightC.isScottContinuous`). That body map is Scott-continuous.

Proof. Continuity of the conditional in its first and third arguments along continuous projections. ■

Theorem (`outrightC.app`). Applying $\mathrm{outrightC}$ recovers the conditional body.

Proof. The β-law for the continuous body. ■

Definition (`inrightC`). $\mathrm{inrightC}$ is the graph of $x \mapsto \langle 1, x\rangle$.

Theorem (`inrightC_app`). $\mathrm{inrightC}\,x = \langle 1, x\rangle$.

Proof. The β-law for continuous right pairing at tag 1. ■

Definition (`inleftC`). $\mathrm{inleftC}$ is the graph of $x \mapsto \langle 0, x\rangle$.

Theorem (`inleftC.app`). $\mathrm{inleftC}\,x = \langle 0, x\rangle$.

Proof. The β-law for continuous right pairing at tag 0. ■

Theorem (`curryC_isScottContinuous`). The map $u \mapsto \mathrm{graph}\big(x \mapsto \mathrm{graph}(y \mapsto u(\langle x, y\rangle))\big)$ is Scott-continuous.

Proof. Nested graph-constant continuity using left-continuity of application at a paired argument. ■

Theorem (`curryC_app`). $\mathrm{curryC}\,u = \mathrm{graph}\big(x \mapsto \mathrm{graph}(y \mapsto u(\langle x, y\rangle))\big)$.

Proof. The β-law for that continuous outer map. ■

Theorem (`curry_mid_isScottContinuous`). For fixed u, the mid map $x \mapsto \mathrm{graph}(y \mapsto u(\langle x, y\rangle))$ is Scott-continuous.

Proof. Graph-constant continuity from continuous application of u along continuous left pairing. ■

Theorem (`diagC_app`). $\mathrm{diagC}\,u = \langle u, u\rangle$.

Proof. The β-law for the continuous diagonal of pairing. ■

Theorem (`evalC_isScottContinuous`). The map $u \mapsto u(0)\,(u(1))$ is Scott-continuous.

Proof. Continuity of application in both arguments along the two projections. ■

Theorem (`evalC_app`). $\mathrm{evalC}\,u = u(0)\,(u(1))$.

Proof. The β-law for that continuous body. ■

`CombC.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.curryC
public import DomainTheory.DataTypesAsLattices.Retracts.diagC
public import DomainTheory.DataTypesAsLattices.Retracts.evalC
public import DomainTheory.DataTypesAsLattices.Retracts.fstC
public import DomainTheory.DataTypesAsLattices.Retracts.sndC
```

```
import DomainTheory.DataTypesAsLattices.Enumeration.PairSeq
import DomainTheory.DataTypesAsLattices.Lambda.graph_const_isScottContinuous
import DomainTheory.DataTypesAsLattices.Graph.beta
import DomainTheory.DataTypesAsLattices.Enumeration.ContinuityHelpers
import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_3

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def whichC : Pomega := fstC

namespace whichC

theorem app (u : Pomega) : funOf whichC u = funOf u (ofNat 0) :=
  fstC.app u

end whichC

def outC : Pomega := sndC

def outleftC : Pomega :=
  graph (fun u => condSet (funOf u (ofNat 0)) (funOf u (ofNat 1)) botElem)

namespace outleftC

theorem isScottContinuous :
    IsScottContinuous (fun u =>
      condSet (funOf u (ofNat 0)) (funOf u (ofNat 1)) botElem) :=
  ContinuityHelpers.tuple
    (fun y => condSet.isScottContinuous_left y botElem)
    (fun tes => condSet.isScottContinuous_mid tes botElem)
    (funOf.isScottContinuous_left (ofNat 0))
    (funOf.isScottContinuous_left (ofNat 1))

theorem app (u : Pomega) :
    funOf outleftC u = condSet (funOf u (ofNat 0)) (funOf u (ofNat 1)) botElem :=
  beta outleftC.isScottContinuous u

end outleftC

def outrightC : Pomega :=
  graph (fun u => condSet (funOf u (ofNat 0)) botElem (funOf u (ofNat 1)))

namespace outrightC

theorem isScottContinuous :
    IsScottContinuous (fun u =>
      condSet (funOf u (ofNat 0)) botElem (funOf u (ofNat 1))) :=
  ContinuityHelpers.tuple
    (fun y => condSet.isScottContinuous_left botElem y)
    (fun tes => condSet.isScottContinuous_right tes botElem)
    (funOf.isScottContinuous_left (ofNat 0))
    (funOf.isScottContinuous_left (ofNat 1))

theorem app (u : Pomega) :
```

```
    funOf outrightC u = condSet (funOf u (ofNat 0)) botElem (funOf u (ofNat 1)) :=
  beta outrightC.isScottContinuous u

end outrightC

def inrightC : Pomega := graph (fun x => pairSeq (ofNat 1) x)

theorem inrightC_app (x : Pomega) :
    funOf inrightC x = pairSeq (ofNat 1) x :=
  beta (PairSeq.isScottContinuous_right (ofNat 1)) x

def inleftC : Pomega := graph (fun x => pairSeq (ofNat 0) x)

namespace inleftC

theorem app (x : Pomega) :
    funOf inleftC x = pairSeq (ofNat 0) x :=
  beta (PairSeq.isScottContinuous_right (ofNat 0)) x

end inleftC

theorem curryC_isScottContinuous :
    IsScottContinuous (fun u =>
      graph (fun x => graph (fun y => funOf u (pairSeq x y)))) :=
  graph_const_isScottContinuous
    (fun u x => graph (fun y => funOf u (pairSeq x y)))
    (fun x =>
      graph_const_isScottContinuous
        (fun u y => funOf u (pairSeq x y))
        (fun y => funOf.isScottContinuous_left (pairSeq x y)))

theorem curryC_app (u : Pomega) :
    funOf curryC u = graph (fun x => graph (fun y => funOf u (pairSeq x y))) :=
  beta curryC_isScottContinuous u

theorem curry_mid_isScottContinuous (u : Pomega) :
    IsScottContinuous (fun x => graph (fun y => funOf u (pairSeq x y))) :=
  graph_const_isScottContinuous
    (fun x y => funOf u (pairSeq x y))
    (fun y => theorem_1_3 (funOf.isScottContinuous u)
      (PairSeq.isScottContinuous_left y))

theorem diagC_app (u : Pomega) : funOf diagC u = pairSeq u u :=
  beta (ContinuityHelpers.on_diag
    PairSeq.isScottContinuous_left PairSeq.isScottContinuous_right) u

theorem evalC_isScottContinuous :
    IsScottContinuous (fun u => funOf (funOf u (ofNat 0)) (funOf u (ofNat 1))) :=
  ContinuityHelpers.tuple
    (fun y => funOf.isScottContinuous_left y)
    (fun t => funOf.isScottContinuous t)
    (funOf.isScottContinuous_left (ofNat 0))
    (funOf.isScottContinuous_left (ofNat 1))

theorem evalC_app (u : Pomega) :
    funOf evalC u = funOf (funOf u (ofNat 0)) (funOf u (ofNat 1)) :=
```

```
  beta evalC_isScottContinuous u

end DomainTheory.DataTypesAsLattices
```

2.5.14 Pair mediation ✓

The mediating arrow into a tensor product of retracts.

Definition (`pairMed`). For maps f, g and a retract c,

$$\mathrm{pairMed}(f, g, c) = (f \otimes g) \circ \mathrm{diagC} \circ c.$$

That is the composite of c with the diagonal into $c \otimes c$, then the tensor of f and g.

pairMed.lean

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.tensorR
public import DomainTheory.DataTypesAsLattices.Retracts.diagC

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def pairMed (f g c : Pomega) : Pomega :=
  comp (tensorR f g) (comp diagC c)

end DomainTheory.DataTypesAsLattices
```

2.5.15 Theorem 4.4 ✓

THEOREM 4.4 (The product theorem). Suppose a, b, a', b' are retracts. Then we have:

(i) $a \otimes b$ is a retract, and it is strict if a and b are;

(ii) $u : a \otimes b$ iff $u = (u_0, u_1)$ and $u_0 : a$ and $u_1 : b$;

(iii) if $a \sqsubseteq a'$ and $b \sqsubseteq b'$, then $a \otimes b \sqsubseteq a' \otimes b'$;

(iv) if $f : a\circ \to b$ and $f' : a'\circ \to b'$, then $f \otimes f' : a \otimes a'\circ \to b \otimes b'$.

Again the operator proves to be a functor, but what is stated in Theorem 4.4 is not quite enough for the standard identification of $\otimes$ as the categorical product. For this we need some additional combinators:

$$\mathbf{fst} = \lambda u.\, u_0; \tag{4.14}$$

$$\mathbf{snd} = \lambda u.\, u_1; \tag{4.15}$$

$$\mathbf{diag} = \lambda u.\, \langle u, u \rangle. \tag{4.16}$$

Then we have these properties:

$$(4.17) \quad \mathbf{fst} \circ (a \otimes b) : (a \otimes b)\circ \to a;$$

$$(4.18) \quad \mathbf{snd} \circ (a \otimes b) : (a \otimes b)\circ \to b;$$

$$(4.19) \quad \mathbf{diag} \circ a : a\circ \to a \otimes a;$$

$$(4.20) \quad \mathbf{fst} \circ (f \otimes f') = f \circ \mathbf{fst};$$

$$(4.21) \quad \mathbf{snd} \circ (f \otimes f') = f' \circ \mathbf{snd}.$$

Here a and b are retracts and f and f' are functions. Now suppose a, b, and c are retracts and $f : c\circ \to a$ and $g : c\circ \to b$. Let

$$h = (f \otimes g) \circ \mathbf{diag} \circ c.$$

We can readily prove that:

$$h : c\circ \to (a \otimes b),$$

and

$$\mathbf{fst} \circ h = f \quad \text{and} \quad \mathbf{snd} \circ h = g.$$

Furthermore, h is the *unique* such function. It is this uniqueness and existence property of functions into $a \otimes b$ that identifies the construct as a product.

There are important connections between $\circ \to$ and $\otimes$. To state these we require some additional combinators:

$$(4.22) \quad \mathbf{eval} = \lambda u.\, u_0(u_1);$$

$$(4.23) \quad \mathbf{curry} = \lambda u \lambda x \lambda y.\, u(\langle x, y\rangle).$$

If a, b, and c are retracts, the mapping properties are:

$$(4.24) \quad \mathbf{eval} \circ ((b\circ \to c) \otimes b) : ((b\circ \to c) \otimes b)\circ \to c;$$

$$(4.25) \quad \mathbf{curry} \circ ((a \otimes b)\circ \to c) : ((a \otimes b)\circ \to c)\circ \to (a\circ \to (b\circ \to c)).$$

Suppose next that $f : (a \otimes b)\circ \to c$ and $g : a\circ \to (b\circ \to c)$. We find that

$$\mathbf{eval} \circ (\mathbf{curry}(f) \otimes b) = f$$

and

$$\mathbf{curry}(\mathbf{eval} \circ (g \otimes b)) = g.$$

This shows that our category of retracts is a *Cartesian closed category*, which means roughly that product spaces and function spaces within the category interact harmoniously.

Formalization. The facts below package pairing projections, Scott's membership clause (ii) for $\otimes$, and the mediating existence/uniqueness that make $\otimes$ a categorical product. Write $h = (f \otimes g) \circ \mathbf{diag} \circ c$ for the mediating composite of the prior peer; the combinators $\mathbf{fst}$, $\mathbf{snd}$, $\mathbf{diag}$ are as in (4.14)–(4.16). Clauses (i), (iii), (iv) and the numbered equations (4.17)–(4.25) are recorded elsewhere.

Theorem (`theorem_4_4.ii`). Pairing recovers its components: $\langle x, y\rangle_0 = x$ and $\langle x, y\rangle_1 = y$.

Proof. The two coordinates of a length-2 sequence. ■

Theorem (`theorem_4_4.typed_iff`). $u : a \otimes b$ if and only if $u = \langle u_0, u_1\rangle$ with $u_0 : a$ and $u_1 : b$.

Proof. ($\Rightarrow$) Fixed-pointness under $a \otimes b$ rewrites u as $\langle a(u_0), b(u_1)\rangle$; projecting both sides yields $u_i = a(u_i)$ (resp. b), and substituting those equalities back gives the displayed pairing. ($\Leftarrow$) From $u = \langle u_0, u_1\rangle$ and the two typings, $(a \otimes b)(u) = \langle a(u_0), b(u_1)\rangle = \langle u_0, u_1\rangle = u$. ■

Theorem (`theorem_4_4.med`). If $f : c\circ \to a$ and $g : c\circ \to b$, then $h : c\circ \to (a \otimes b)$, $\mathbf{fst} \circ h = f$, and $\mathbf{snd} \circ h = g$.

Proof. Pointwise, $h(x) = \langle f(c(x)), g(c(x))\rangle$; applying $a \otimes b$ (with c a retract and the typings of f and g) returns the same pair, so h is typed into the product arrow. Composing with $\mathbf{fst}$ (resp. $\mathbf{snd}$) peels the first (resp. second) coordinate and uses that f (resp. g) already restricts along c. ■

Theorem (`theorem_4_4.med_unique`). Any $h' : c\circ \to (a \otimes b)$ with $\mathbf{fst} \circ h' = f$ and $\mathbf{snd} \circ h' = g$ equals h.

Proof. At each x, typing into $a \otimes b$ forces $h'(x) = \langle a(h'(c(x))_0), b(h'(c(x))_1)\rangle$; the projection hypotheses identify those coordinates with $f(x)$ and $g(x)$, matching $(f \otimes g)(\mathbf{diag}(c(x)))$. ■

Theorem (`theorem_4_4`). Pairing projections hold for all x, y, and $\bot$ is a retract.

Proof. The projection identity just proved, together with the known retract $\bot$. ■

`theorem_4_4.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.arrowR
public import DomainTheory.DataTypesAsLattices.Retracts.fstC
public import DomainTheory.DataTypesAsLattices.Retracts.sndC
public import DomainTheory.DataTypesAsLattices.Functionality.pairMed
import DomainTheory.DataTypesAsLattices.Graph.funOf_more
import DomainTheory.DataTypesAsLattices.Functionality.CombC
import DomainTheory.DataTypesAsLattices.Enumeration.PairSeq
import DomainTheory.DataTypesAsLattices.Retracts.typed_more
import DomainTheory.DataTypesAsLattices.Retracts.bot_isRetract
import DomainTheory.DataTypesAsLattices.Retracts.retract_app
import DomainTheory.DataTypesAsLattices.Retracts.graphLemmas

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_4_4

theorem ii (x y : Pomega) :
    funOf (pairSeq x y) (ofNat 0) = x ∧
      funOf (pairSeq x y) (ofNat 1) = y :=
  ⟨seq2.zero x y, seq2.one x y⟩
```

```
theorem typed_iff {a b u : Pomega} :
    typed u (tensorR a b) ↔
      u = pairSeq (funOf u (ofNat 0)) (funOf u (ofNat 1)) ∧
        typed (funOf u (ofNat 0)) a ∧ typed (funOf u (ofNat 1)) b := by
  constructor
  · intro hu
    have hpair : u =
        pairSeq (funOf a (funOf u (ofNat 0)))
          (funOf b (funOf u (ofNat 1))) := by
      simpa [typed, tensorR.app] using hu
    have h0 : funOf u (ofNat 0) = funOf a (funOf u (ofNat 0)) := by
      have := congrArg (fun w => funOf w (ofNat 0)) hpair
      simpa [PairSeq.app_zero] using this
    have h1 : funOf u (ofNat 1) = funOf b (funOf u (ofNat 1)) := by
      have := congrArg (fun w => funOf w (ofNat 1)) hpair
      simpa [PairSeq.app_one] using this
    refine ⟨hpair.trans (congr (congrArg pairSeq h0.symm) h1.symm), h0, h1⟩
  · intro ⟨hpair, ha, hb⟩
    change u = funOf (tensorR a b) u
    rw [tensorR.app, ← ha, ← hb, ← hpair]

theorem med {a b c f g : Pomega}
    (_ha : Retract a) (_hb : Retract b) (hc : Retract c)
    (hf : typed f (arrowR c a)) (hg : typed g (arrowR c b)) :
    typed (pairMed f g c) (arrowR c (tensorR a b)) ∧
      comp fstC (pairMed f g c) = f ∧
      comp sndC (pairMed f g c) = g := by
  have hf' := arrowR.typed_of hf
  have hg' := arrowR.typed_of hg
  refine ⟨?_, ?_, ?_⟩
  · change pairMed f g c =
        funOf (arrowR c (tensorR a b)) (pairMed f g c)
    rw [arrowR.app, pairMed]
    apply graph_ext
    intro x
    have hfxc : funOf f (funOf c x) =
        funOf a (funOf f (funOf c x)) := by
      have := congrArg (fun w => funOf w (funOf c x)) hf'
      simpa [comp.app, retract_app hc] using this
    have hgxc : funOf g (funOf c x) =
        funOf b (funOf g (funOf c x)) := by
      have := congrArg (fun w => funOf w (funOf c x)) hg'
      simpa [comp.app, retract_app hc] using this
    have hL : funOf (tensorR f g) (funOf diagC (funOf c x)) =
        pairSeq (funOf f (funOf c x)) (funOf g (funOf c x)) := by
      rw [diagC_app, tensorR.app, PairSeq.app_zero, PairSeq.app_one]
    have hR : funOf (tensorR a b)
        (funOf (tensorR f g) (funOf diagC (funOf c (funOf c x)))) =
        pairSeq (funOf a (funOf f (funOf c x)))
          (funOf b (funOf g (funOf c x))) := by
      rw [retract_app hc, diagC_app]
      have hinter :
          funOf (tensorR f g) (pairSeq (funOf c x) (funOf c x)) =
            pairSeq (funOf f (funOf c x)) (funOf g (funOf c x)) := by
        rw [tensorR.app, PairSeq.app_zero, PairSeq.app_one]
      rw [hinter, tensorR.app, PairSeq.app_zero, PairSeq.app_one]
```

```
    simp only [comp.app]
    rw [hL, hR]
    exact congr (congrArg pairSeq hfxc) hgxc
  · apply funOf.ext_graph (comp.isGraph _ _) (typed.isGraph hf)
    intro x
    simp only [comp.app, pairMed, fstC.app, diagC_app]
    rw [tensorR.app, PairSeq.app_zero, PairSeq.app_zero]
    have := congrArg (fun w => funOf w x) (typed.arrowR_restrict hc hf)
    simpa [comp.app] using this.symm
  · apply funOf.ext_graph (comp.isGraph _ _) (typed.isGraph hg)
    intro x
    simp only [comp.app, pairMed, sndC.app, diagC_app]
    rw [tensorR.app, PairSeq.app_one, PairSeq.app_one]
    have := congrArg (fun w => funOf w x) (typed.arrowR_restrict hc hg)
    simpa [comp.app] using this.symm

theorem med_unique {a b c f g h : Pomega}
    (ha : Retract a) (hb : Retract b) (hc : Retract c)
    (hf : typed f (arrowR c a)) (hg : typed g (arrowR c b))
    (hh : typed h (arrowR c (tensorR a b)))
    (hfst : comp fstC h = f) (hsnd : comp sndC h = g) :
    h = pairMed f g c := by
  apply funOf.ext_graph (typed.isGraph hh)
    (typed.isGraph (med ha hb hc hf hg).1)
  intro x
  have hh' := arrowR.typed_of hh
  have hx : funOf h x =
      funOf (tensorR a b) (funOf h (funOf c x)) := by
    have := congrArg (fun w => funOf w x) hh'
    simpa [comp.app] using this
  have h0 : funOf (funOf h x) (ofNat 0) = funOf f x := by
    have := congrArg (fun w => funOf w x) hfst
    simpa [comp.app, fstC.app] using this
  have h1 : funOf (funOf h x) (ofNat 1) = funOf g x := by
    have := congrArg (fun w => funOf w x) hsnd
    simpa [comp.app, sndC.app] using this
  rw [hx, tensorR.app]
  have hfx : funOf a (funOf (funOf h (funOf c x)) (ofNat 0)) = funOf f x := by
    have h0c : funOf (funOf h (funOf c x)) (ofNat 0) = funOf f (funOf c x) := by
      have := congrArg (fun w => funOf w (funOf c x)) hfst
      simpa [comp.app, fstC.app] using this
    rw [h0c]
    have := congrArg (fun w => funOf w x) (arrowR.typed_of hf)
    simpa [comp.app] using this.symm
  have hgx : funOf b (funOf (funOf h (funOf c x)) (ofNat 1)) = funOf g x := by
    have h1c : funOf (funOf h (funOf c x)) (ofNat 1) = funOf g (funOf c x) := by
      have := congrArg (fun w => funOf w (funOf c x)) hsnd
      simpa [comp.app, sndC.app] using this
    rw [h1c]
    have := congrArg (fun w => funOf w x) (arrowR.typed_of hg)
    simpa [comp.app] using this.symm
  rw [hfx, hgx]
  simp only [pairMed, comp.app, diagC_app, tensorR.app, PairSeq.app_zero,
    PairSeq.app_one]
  have hfr : funOf f (funOf c x) = funOf f x := by
    have := congrArg (fun w => funOf w x) (typed.arrowR_restrict hc hf)
```

```
    simpa [comp.app] using this.symm
  have hgr : funOf g (funOf c x) = funOf g x := by
    have := congrArg (fun w => funOf w x) (typed.arrowR_restrict hc hg)
    simpa [comp.app] using this.symm
  rw [hfr, hgr]

end theorem_4_4

theorem theorem_4_4 :
    (∀ x y, funOf (pairSeq x y) (ofNat 0) = x ∧
      funOf (pairSeq x y) (ofNat 1) = y) ∧
      Retract botElem :=
  ⟨fun x y => theorem_4_4.ii x y, bot_isRetract⟩

end DomainTheory.DataTypesAsLattices
```

2.5.16 Theorem 4.5 ✓

THEOREM 4.5 (The sum theorem). Suppose a, b, a', b' are retracts. Then we have:

(i) $a \oplus b$ is a retract, and it is always strict;

(ii) $u : a \oplus b$ iff $u = \bot$ or $u = \top$ or ($u = \langle 0, u_1 \rangle$ and $u_1 : a$) or ($u = \langle 1, u_1 \rangle$ and $u_1 : b$);

(iii) if $a \sqsubseteq a'$ and $b \sqsubseteq b'$, then $a \oplus b \sqsubseteq a' \oplus b'$;

(iv) if $f : a\circ \to b$ and $f' : a'\circ \to b'$, then $f \oplus f' : a \oplus a'\circ \to b \oplus b'$.

There are several combinators associated with $\oplus$:

$$(4.26) \quad \mathbf{inleft} = \lambda x.\, \langle 0, x \rangle;$$

$$(4.27) \quad \mathbf{inright} = \lambda x.\, \langle 1, x \rangle;$$

$$(4.28) \quad \mathbf{outleft} = \lambda u.\, u_0 \supset u_1,\, \bot;$$

$$(4.29) \quad \mathbf{outright} = \lambda u.\, u_0 \supset \bot,\, u_1;$$

$$(4.30) \quad \mathbf{which} = \lambda u.\, u_0;$$

$$(4.31) \quad \mathbf{out} = \lambda u.\, u_1.$$

(The last two are the same as **fst** and **snd**, but they will be used differently.) We find:

$$(4.32) \quad (a \oplus b) \circ \mathbf{inleft} \circ a : a\circ \to (a \oplus b);$$

$$(4.33) \quad (a \oplus b) \circ \mathbf{inright} \circ b : b\circ \to (a \oplus b);$$

$$(4.34)\quad a \circ \mathbf{outleft} \circ (a \oplus b) : (a \oplus b)\circ \to a;$$

$$(4.35)\quad b \circ \mathbf{outright} \circ (a \oplus b) : (a \oplus b)\circ \to b;$$

$$(4.36)\quad \mathbf{which} \circ (a \oplus b) : (a \oplus b)\circ \to \mathbf{bool};$$

$$(4.37)\quad a \circ \mathbf{out} \circ (a \oplus a) : (a \oplus a)\circ \to a;$$

where a and b are retracts. Most of these facts as they stand are trivial until one sets down the relations between all these maps; but there are too many to put them down here. Note, however, if a, b, and c are retracts and $f : a\circ \to c$ and $g : b\circ \to c$, then if we let

$$h = c \circ \mathbf{out} \circ (f \oplus g),$$

we have:

$$h : (a \oplus b)\circ \to c,$$

and

$$h \circ \mathbf{inleft} = f \quad \text{and} \quad h \circ \mathbf{inright} = g.$$

But, though h exists, it is not unique. So $a \oplus b$ is not the categorical sum (coproduct). The author does not know a neat categorical characterization of this operator.

There would be no difficulty in extending $\otimes$ and $\oplus$ to more factors by expanding the range of indices from $0, 1$ to $0, 1, \ldots, n-1$. The explicit formulae need not be given; but if we write $a_0 \otimes a_1 \otimes \cdots \otimes a_{n-1}$, we intend this expanded meaning rather than the iterated binary product.

To understand sums and other facts about retracts, consider the least fixed point of this equation:

$$(4.38)\quad \mathbf{tree} = \mathbf{nil} \oplus (\mathbf{tree} \otimes \mathbf{tree}).$$

To be certain that **tree** is a retract, we need a general theorem:

Proofs of Theorems 4.3–4.5. We will not give full details as all the parts of these theorems are direct calculations. Consider by way of example Theorem 4.3(i). We find:

$$\begin{aligned}(a\circ \to b) \circ (a\circ \to b) &= \lambda u.\, b \circ (b \circ u \circ a) \circ a \\ &= \lambda u.\, b \circ u \circ a \\ &= a\circ \to b,\end{aligned}$$

provided that a and b are retracts. A very similar computation would verify part (iv), if one writes out the composition:

$$(a\circ \to b') \circ (f\circ \to f') \circ (b\circ \to a')$$

and uses the equations:

$$f = b \circ f \circ a \quad \text{and} \quad f' = b' \circ f' \circ a'.$$

Formalization. The Lean owned by this note is a thin packaging of the $\bot$-case that seeds strictness of $\oplus$. The sum operator itself is

$$a \oplus b = \mathbf{graph}\big(u \mapsto u_0 \sqsupset \langle 0,\, a(u_1)\rangle,\, \langle 1,\, b(u_1)\rangle\big)$$

(using the doubly strict conditional of (4.4)). The full packaging of Scott's (i)–(ii) lives in `theorem_4_5_sum` (Functionality); clauses (iii)–(iv) and (4.32)–(4.37) are companion lemmas.

Theorem (`theorem_4_5`). For any a, b,

$$\bot \sqsupset \langle 0,\, a(\bot)\rangle,\, \langle 1,\, b(\bot)\rangle \;=\; \bot,$$

and $\bot$ is a retract.

Proof. The first conjunct is the empty-tag law for $\sqsupset$: a pure bottom discriminator yields $\bot$ regardless of the two branches. The second is the known retract $\bot = \bot \circ \bot$. ■

`theorem_4_5.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.Retract
public import DomainTheory.DataTypesAsLattices.Retracts.pairSeq
import DomainTheory.DataTypesAsLattices.Retracts.bot_isRetract
public import DomainTheory.DataTypesAsLattices.Retracts.typed
public import DomainTheory.DataTypesAsLattices.Retracts.plusR
public import DomainTheory.DataTypesAsLattices.Retracts.IsStrict
public import DomainTheory.DataTypesAsLattices.Lambda.Language
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_4_5 (a b : Pomega) :
    dcondSet botElem
      (pairSeq (ofNat 0) (funOf a botElem))
      (pairSeq (ofNat 1) (funOf b botElem)) = botElem ∧
      Retract botElem :=
  ⟨dcondSet.bot _ _, bot_isRetract⟩

namespace theorem_4_5

theorem sum {a b : Pomega} (ha : Retract a) (hb : Retract b) :
    Retract (plusR a b) ∧ IsStrict (plusR a b) ∧
      (∀ u, typed u (plusR a b) ↔
        u = botElem ∨ u = topElem ∨
          (∃ x, u = pairSeq (ofNat 0) x ∧ typed x a) ∨
            (∃ y, u = pairSeq (ofNat 1) y ∧ typed y b)) :=
  ⟨plusR.isRetract ha hb, plusR.isStrict a b, fun _u => plusR.typed_iff ha hb⟩

end theorem_4_5

end DomainTheory.DataTypesAsLattices
```

2.5.17 Expression interpreter ✓

Any combination of retract preserving functors can be used in this game. For example:

$$(4.39) \quad \mathbf{lamb} = \mathbf{int} \oplus (\mathbf{lamb} \circ \to \mathbf{lamb}).$$

This looks innocent, but the range of **lamb** would give a quite different and not unattractive model for the λ-calculus (plus arithmetic). What we do to investigate this model is to modify LAMBDA slightly by replacing the ternary conditional $z \supset x, y$ by a quaternary one $w \supset x, y, z$; otherwise the syntax of the language remains the same. The semantics, however, is a little more complex.

Let us use τ, σ, ρ, θ as syntactical variables for expressions in the modified language. The semantics is provided by a function $\mathcal{H}$ that maps the expressions of the language to their values in (the range of) **lamb**. To be completely rigorous we

also have to confront the question of free and bound variables. For simplicity let us index the variables of the language by integers, and let us take the variables to be $v_0, v_1, v_2, \ldots, v_n, \ldots$. We cannot simply evaluate out an expression τ to its value $\mathcal{H}[\![\tau]\!]$ until we know the values of the free variables in τ. The values of these variables will be given by an "environment" t which can be construed as a *sequence* of values in **lamb**. We can restrict these environments to the retract:

$$(4.40) \quad \mathbf{env} = \lambda t.\, \mathbf{lamb} \circ \mathbf{seq}(t).$$

When $t : \mathbf{env}$, then $t_n : \mathbf{lamb}$ is the value that the environment gives to the variable v_n. We also need to employ a transformation on environments as follows:

$$(4.41) \quad t[x/n] = \lambda m \in \omega.\, \mathbf{eq}(n)(m) \supset x,\, t_m.$$

Here **eq** is the primitive recursive function that is 0, if n, m are equal, and is 1, otherwise, for $n, m \in \omega$. The effect of $t[x/n]$ is to replace the nth term of the sequence t by the value of x, otherwise to leave the rest of the sequence unchanged. To correspond with our use of very simple variables we have selected a simple notion of environment: in the semantics of more general languages it is customary to regard an environment as a function from the set of variables into the domain of denotable values.

The correct way to evaluate a term τ given an environment t is to find $\mathcal{H}[\![\tau]\!](t)$. We use the brackets $[\![$ and $]\!]$ here simply as an aid to the eye in keeping the syntactical part separated from the rest. The environment enters as a function-argument in the usual way; thus we shall have:

$$(4.42) \quad \mathcal{H}[\![\tau]\!] : \mathbf{env} \to \mathbf{lamb}.$$

$$\begin{aligned}
\mathcal{H}[\![v_n]\!](t) &= t_n \\
\mathcal{H}[\![0]\!](t) &= \mathbf{inleft}(0) \\
\mathcal{H}[\![\tau + 1]\!](t) &= \mathbf{which}(\mathcal{H}[\![\tau]\!](t) \supset \mathbf{inleft}(\mathbf{out}(\mathcal{H}[\![\tau]\!](t)) + 1),\, \bot) \\
\mathcal{H}[\![\tau - 1]\!](t) &= \mathbf{which}(\mathcal{H}[\![\tau]\!](t) \supset \mathbf{inleft}(\mathbf{out}(\mathcal{H}[\![\tau]\!](t)) - 1),\, \bot) \\
\mathcal{H}[\![\theta \supset \tau, \sigma, \rho]\!](t) &= \mathbf{lamb}(\mathbf{which}(\mathcal{H}[\![\theta]\!](t) \supset (\mathbf{out}(\mathcal{H}[\![\theta]\!](t)) \supset \mathcal{H}[\![\tau]\!](t),\, \mathcal{H}[\![\sigma]\!](t)),\, \mathcal{H}[\![\rho]\!](t))) \\
\mathcal{H}[\![\tau(\sigma)]\!](t) &= \mathbf{which}(\mathcal{H}[\![\tau]\!](t) \supset \bot,\, \mathbf{out}(\mathcal{H}[\![\tau]\!](t))(\mathcal{H}[\![\sigma]\!](t))) \\
\mathcal{H}[\![\lambda v_n.\, \tau]\!](t) &= \mathbf{inright}(\lambda x : \mathbf{lamb}.\, \mathcal{H}[\![\tau]\!](t[x/n])).
\end{aligned} \tag{4.43}$$

A good question is: why does $\mathcal{H}$ exist? The answer is: because of the fixed-point theorem.

If we rewrite the semantic equations $\mathcal{H}[\![\tau]\!](t) = (\dots)$ in (43) by the equation $\mathcal{H}[\![\tau]\!] = \lambda t : \mathbf{env}\,(\dots)$, then $\mathcal{H}$ is seen to be a function from expressions to values in **lamb**. As the range of **lamb** is contained in $\mathbf{P}\omega$, we can say more broadly that $\mathcal{H} \in \mathbf{P}\omega^{\mathbf{Exp}}$, where **Exp** is the syntactical set of expressions and the exponential notation designates the set of *all* functions from **Exp** into $\mathbf{P}\omega$. This function set is a complete lattice because $\mathbf{P}\omega$ is. Therefore if we read (4.43) as a definition by cases on **Exp**, then we can find $\mathcal{H}$ as a suitable fixed point in the complete lattice $\mathbf{P}\omega^{\mathbf{Exp}}$. Indeed it is the fixed point of a continuous operator.

Actually we can regard **Exp** as being a subset of $\mathbf{P}\omega$ to avoid dragging in other lattices. What we need is another recursive definition of a data type:

$$(4.44)\quad \mathbf{exp} = \mathbf{int} \oplus \mathbf{nil} \oplus \mathbf{exp} \oplus \mathbf{exp} \oplus (\mathbf{exp} \otimes \mathbf{exp} \otimes \mathbf{exp} \otimes \mathbf{exp}) \\ \oplus(\mathbf{exp} \otimes \mathbf{exp}) \oplus (\mathbf{int} \otimes \mathbf{exp}).$$

Note that there are as many summands in (4.44) as there are clauses in (4.43). We can think of **exp** as giving the "abstract" syntax of the language. We use the integers to index the variables and the **nil** element to stand for the individual constant. Read (4.44) as saying that every expression is *either* a variable *or* a constant *or* the successor of an expression *or* the predecessor of an expression *or* the conditional formed from a tuple of expressions *or* the abstraction formed from a pair of a variable and an expression. We do not need in (4.44) to introduce special "symbols" for the successor, application, etc., because the separation by cases given by the $\oplus$ operation is sufficient to make the distinctions. (That is why the syntax is "abstract".) The point is that for recursive definitions it does not matter how we make the distinctions as long as they can be made. From this new point of view, we could rewrite (4.43) so as to show:

$$(4.45)\quad \mathcal{H} : \mathbf{exp} \to (\mathbf{env} \to \mathbf{lamb}),$$

which is clearly more satisfactory—especially as it is now clear that $\mathcal{H}$ is *computable*. And this is a method that can be generalized to many other languages. The method also shows why it is useful to allow *function spaces* as particular data types.

Formalization. Abstract syntax, its encoding into the **exp** retract, the tagged continuous step clauses of the interpreter, the least fixed point packaging, and the typing identity (4.45).

Definition (`LambTerm`). An expression is a variable index, zero, a successor or predecessor of an expression, a quaternary conditional of four expressions, an application of two expressions, or an abstraction of an index and a body.

Definition (`encodeExp`). Encode each constructor by the corresponding summand of (4.44): tag 0 with a numeral, tag 1 with $\perp$, tags 2–3 with a recursive encoding, tag 4 with a four-tuple of encodings, tag 5 with a pair of encodings, and tag 6 with a numeral paired to a body encoding.

Theorem (`encodeExp.typed`). Every encoding is typed into **exp**.

Proof. Induction on syntax, using the fixed-point equation for **exp** and the typing laws for the seven summands. ■

Definition (`expTag`). The tag of an encoded expression is its application to 0.

Definition (`expPayload`). The payload of an encoded expression is its application to 1.

Definition (`hApply`). Apply an interpreter candidate H to an encoded expression e at an environment t.

Theorem (`hApply.isScottContinuous_H`). Application is Scott-continuous in the interpreter candidate.

Proof. Compose left-continuity of application twice. ■

Theorem (`hApply.isScottContinuous_e`). Application is Scott-continuous in the encoded expression.

Proof. Compose left-continuity of application with continuity of the candidate. ■

Theorem (`hApply.payload_isScottContinuous_e`). Applying H at the ith component of the payload is Scott-continuous in the encoding.

Proof. Compose the previous continuity in e with continuity of payload projection. ■

Definition (`hVar`). The variable clause looks up the payload of e in the environment t.

Theorem (`hVar.isScottContinuous_t`). The variable clause is Scott-continuous in the environment.

Proof. Left-continuity of application at a fixed payload. ■

Theorem (`hVar.isScottContinuous_e`). The variable clause is Scott-continuous in the encoding.

Proof. Compose continuity of the environment with continuity of the payload. ■

Definition (`hZero`). The zero clause is the left injection of the numeral 0.

Definition (`hApp`). The application clause tests the tag of the value of the operator payload: on a right injection it applies the extracted function to the value of the operand payload; otherwise it yields $\bot$.

Theorem (`hApp.isScottContinuous_H`). The application clause is Scott-continuous in the interpreter candidate.

Proof. Continuity of the ternary conditional along continuous tag tests and continuous applications of H. ■

Theorem (`hApp.isScottContinuous_t`). The application clause is Scott-continuous in the environment.

Proof. Continuity of the conditional along continuous evaluation of the two payloads. ■

Theorem (`hApp.isScottContinuous_e`). The application clause is Scott-continuous in the encoding.

Proof. Continuity of the conditional along continuous payload projections. ■

Definition (`hSucc`). The successor clause tests the tag of the recursive value: on a left injection it re-injects the successor of the payload; otherwise it yields $\bot$.

Theorem (`hSucc.isScottContinuous_H`). The successor clause is Scott-continuous in the interpreter candidate.

Proof. Continuity of the conditional along continuous application of H, extraction, and successor. ■

Theorem (`hSucc.isScottContinuous_t`). The successor clause is Scott-continuous in the environment.

Proof. Continuity of the conditional along continuous evaluation of the payload. ■

Theorem (`hSucc.isScottContinuous_e`). The successor clause is Scott-continuous in the encoding.

Proof. Continuity of the conditional along continuous payload projection. ■

Definition (`hPred`). The predecessor clause is as for successor, with predecessor in place of successor.

Theorem (`hPred.isScottContinuous_H`). The predecessor clause is Scott-continuous in the interpreter candidate.

Proof. As for successor, with continuity of predecessor. ■

Theorem (`hPred.isScottContinuous_t`). The predecessor clause is Scott-continuous in the environment.

Proof. As for successor. ■

Theorem (`hPred.isScottContinuous_e`). The predecessor clause is Scott-continuous in the encoding.

Proof. As for successor. ■

Definition (`hCond`). The quaternary conditional clause evaluates the four payload components and selects via the **lamb**-wrapped nested conditional of (4.43).

Theorem (`hCond.isScottContinuous_H`). The conditional clause is Scott-continuous in the interpreter candidate.

Proof. Continuity of application of **lamb** along continuous nested conditionals of continuous applications of H. ■

Theorem (`hCond.isScottContinuous_t`). The conditional clause is Scott-continuous in the environment.

Proof. Continuity of **lamb**-application along continuous evaluation of the four payloads. ■

Theorem (`hCond.isScottContinuous_e`). The conditional clause is Scott-continuous in the encoding.

Proof. Continuity of **lamb**-application along continuous payload projections. ■

Definition (`hLam`). The abstraction clause right-injects the graph of $x \mapsto H$ applied to the body payload at the environment updated at the bound index by x.

Theorem (`hLam.isScottContinuous_H`). The abstraction clause is Scott-continuous in the interpreter candidate.

Proof. Continuity of right injection of a graph whose body is continuous in H. ■

Theorem (`hLam.isScottContinuous_t`). The abstraction clause is Scott-continuous in the environment.

Proof. Continuity of right injection of a graph continuous in the updated environment. ■

Theorem (`hLam.isScottContinuous_e`). The abstraction clause is Scott-continuous in the encoding.

Proof. Continuity of right injection along continuous payload projections into the update. ■

Definition (`Hstep`). The tagged step nests doubly strict conditionals on iterated predecessors of the tag, dispatching to the variable, zero, successor, predecessor, conditional, application, and abstraction clauses, with $\top$ as the residual.

Theorem (`Hstep.tag0`). On a tag-0 injection with payload x, the step returns $t(x)$.

Proof. Unfold the tag cascade at numeral 0. ■

Theorem (`Hstep.tag1`). On a tag-1 injection, the step returns the zero clause.

Proof. Unfold the tag cascade at numeral 1. ■

Theorem (`Hstep.tag2`). On a tag-2 injection, the step returns the successor clause at that encoding.

Proof. Unfold the tag cascade at numeral 2. ■

Theorem (`Hstep.tag3`). On a tag-3 injection, the step returns the predecessor clause at that encoding.

Proof. Unfold the tag cascade at numeral 3. ■

Theorem (`Hstep.tag4`). On a tag-4 injection, the step returns the conditional clause at that encoding.

Proof. Unfold the tag cascade at numeral 4. ■

Theorem (`Hstep.tag5`). On a tag-5 injection, the step returns the application clause at that encoding.

Proof. Unfold the tag cascade at numeral 5. ■

Theorem (`Hstep.tag6`). On a tag-6 injection, the step returns the abstraction clause at that encoding.

Proof. Unfold the tag cascade at numeral 6. ■

Theorem (`Hstep.isScottContinuous_H`). The step is Scott-continuous in the interpreter candidate.

Proof. Nest continuity of the doubly strict conditional along continuous clauses in H. ■

Theorem (`Hstep.isScottContinuous_t`). The step is Scott-continuous in the environment.

Proof. Nest continuity of the doubly strict conditional along continuous clauses in t. ■

Theorem (`Hstep.isScottContinuous_e`). The step is Scott-continuous in the encoding.

Proof. Nest continuity of the doubly strict conditional along continuous tag maps and continuous clauses in e. ■

Definition (`HF`). The continuous operator on interpreter candidates sends H to the graph of $e \mapsto$ the graph of $t \mapsto \mathrm{Hstep}(H, e, t)$.

Theorem (`HF.inner_isScottContinuous`). For fixed H, the map $e \mapsto$ the graph of $t \mapsto \mathrm{Hstep}(H, e, t)$ is Scott-continuous.

Proof. Graph of a family continuous in e for each t. ■

Theorem (`HF.isScottContinuous`). HF is Scott-continuous.

Proof. Graph of a family continuous in H for each e, using continuity of the step in H. ■

Theorem (`HF.app`). Applying $\mathrm{HF}(H)$ to e recovers the graph of $t \mapsto \mathrm{Hstep}(H, e, t)$.

Proof. The β-law for the inner continuous graph. ■

Theorem (`HF.app2`). Applying that graph at t recovers $\mathrm{Hstep}(H, e, t)$.

Proof. The previous application law and the β-law for the step in t. ■

Definition (`Hinterp`). The compositional semantics (4.43): variables look up the environment; zero is the left injection of 0; successor and predecessor re-inject after testing; the quaternary conditional is **lamb**-wrapped; application tests the operator tag; abstraction right-injects the graph of the body in an updated environment.

Theorem (`Hinterp.isScottContinuous`). For each expression, compositional interpretation is Scott-continuous in the environment.

Proof. Induction on syntax, assembling continuity of conditionals, injections, **lamb**, graphs, and environment update. ■

Definition (`Hfun`). The interpreter is the least fixed point of HF.

Theorem (`Hfun.fixed`). $\mathrm{HF}(\mathrm{Hfun}) = \mathrm{Hfun}$.

Proof. The fixed-point theorem for a Scott-continuous operator. ■

Theorem (`Hfun.app2`). Applying Hfun twice recovers the step at Hfun.

Proof. Congruence from the fixed-point equation and the double application law for HF. ■

Theorem (`Hfun.interp`). On an encoded expression, Hfun agrees with compositional interpretation.

Proof. Induction on syntax: tag laws select the matching clause, and inductive hypotheses rewrite recursive applications. ■

Theorem (`Hfun.decode`). Applying Hfun to an encoding yields the graph of compositional interpretation.

Proof. The fixed-point application law yields the step graph; pointwise the previous agreement rewrites it to compositional interpretation. ■

Definition (`Htyped`). The retract-arrow packaging of compositional interpretation as an element of $\mathbf{env}\circ \to \mathbf{lamb}$.

Theorem (`Htyped.app`). Applying the packaging at t yields **lamb** of compositional interpretation at the **env**-projection of t.

Proof. The retract-arrow application law and the β-law for continuous compositional interpretation. ■

Theorem (`Htyped.typed`). The packaging is typed into $\mathbf{env}\circ \to \mathbf{lamb}$.

Proof. Typing of retract-arrow application. ■

Definition (`Hcomb`). $\mathcal{H}$ as the retract-arrow packaging of Hfun into $\mathbf{exp}\circ \to (\mathbf{env}\circ \to \mathbf{lamb})$.

Theorem (`Hcomb.app`). Applying $\mathcal{H}$ at e yields the **env–lamb** packaging of Hfun at the **exp**-projection of e.

Proof. The retract-arrow application law. ■

Theorem (`Hcomb.typed`). $\mathcal{H}$ is typed into $\mathbf{exp}\circ \to (\mathbf{env}\circ \to \mathbf{lamb})$.

Proof. Typing of retract-arrow application at the three retracts. ■

Theorem (`eq_4_45`). An encoding is typed into **exp**; its compositional packaging is typed into $\mathbf{env}\circ \to \mathbf{lamb}$; and $\mathcal{H}$ on that encoding equals the compositional packaging.

Proof. Encoding typing, packaging typing, and decode after projecting the encoding through **exp**. ■

eq_4_45.lean

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.expR
public import DomainTheory.DataTypesAsLattices.Functionality.CombC
public import DomainTheory.DataTypesAsLattices.Retracts.updateEnv
public import DomainTheory.DataTypesAsLattices.Retracts.envR
import DomainTheory.DataTypesAsLattices.Retracts.eq_4_44
import DomainTheory.DataTypesAsLattices.Retracts.typed_more
import DomainTheory.DataTypesAsLattices.Retracts.arrowR_more
import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_4
import DomainTheory.DataTypesAsLattices.Functionality.PlotkinHelpers
import DomainTheory.DataTypesAsLattices.Lambda.const_isScottContinuous
import DomainTheory.DataTypesAsLattices.Enumeration.ContinuityHelpers
import DomainTheory.DataTypesAsLattices.Enumeration.PairSeq
import DomainTheory.DataTypesAsLattices.Lambda.succSet_more
import DomainTheory.DataTypesAsLattices.Lambda.predSet_more
import DomainTheory.DataTypesAsLattices.Lambda.graph_const_isScottContinuous
import DomainTheory.DataTypesAsLattices.Graph.beta
import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_3

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

inductive LambTerm where
  | var : ℕ → LambTerm
  | zero : LambTerm
  | succ : LambTerm → LambTerm
  | pred : LambTerm → LambTerm
  | condq : LambTerm → LambTerm → LambTerm → LambTerm → LambTerm
  | app : LambTerm → LambTerm → LambTerm
  | lam : ℕ → LambTerm → LambTerm

def encodeExp : LambTerm → Pomega
  | .var n => tagInj 0 (ofNat n)
  | .zero => tagInj 1 botElem
  | .succ τ => tagInj 2 (encodeExp τ)
  | .pred τ => tagInj 3 (encodeExp τ)
  | .condq ? τ σ ? =>
      tagInj 4 (seq4 (encodeExp ?) (encodeExp τ) (encodeExp σ) (encodeExp ?))
  | .app τ σ => tagInj 5 (pairSeq (encodeExp τ) (encodeExp σ))
  | .lam n τ => tagInj 6 (pairSeq (ofNat n) (encodeExp τ))

namespace encodeExp
```

```
theorem typed : ∀ τ : LambTerm, typed (encodeExp τ) expR := by
  intro τ
  induction τ with
  | var n =>
    rw [encodeExp, DomainTheory.DataTypesAsLattices.eq_4_44]
    exact plus7.typed_inl0 (typed.ofNat_intR n)
  | zero =>
    rw [encodeExp, DomainTheory.DataTypesAsLattices.eq_4_44]
    exact plus7.typed_inl1 typed.bot_botElem
  | succ τ ih =>
    rw [encodeExp, DomainTheory.DataTypesAsLattices.eq_4_44]
    exact plus7.typed_inl2 ih
  | pred τ ih =>
    rw [encodeExp, DomainTheory.DataTypesAsLattices.eq_4_44]
    exact plus7.typed_inl3 ih
  | condq ? τ σ ? ih? ihτ ihσ ih? =>
    rw [encodeExp, DomainTheory.DataTypesAsLattices.eq_4_44]
    refine plus7.typed_inl4 ?_
    rw [DomainTheory.DataTypesAsLattices.typed, tensor4.app, seq4.zero, seq4.one, seq4
    .two,
      seq4.three, ← ih?, ← ihτ, ← ihσ, ← ih?]
  | app τ σ ihτ ihσ =>
    rw [encodeExp, DomainTheory.DataTypesAsLattices.eq_4_44]
    refine plus7.typed_inl5 ?_
    exact (typed.pairSeq_tensorR expR expR _ _).mpr ⟨ihτ, ihσ⟩
  | lam n τ ih =>
    rw [encodeExp, DomainTheory.DataTypesAsLattices.eq_4_44]
    refine plus7.typed_inl6 ?_
    exact (typed.pairSeq_tensorR intR expR _ _).mpr ⟨typed.ofNat_intR n, ih⟩

end encodeExp

def expTag (e : Pomega) : Pomega := funOf e (ofNat 0)

def expPayload (e : Pomega) : Pomega := funOf e (ofNat 1)

def hApply (H e t : Pomega) : Pomega := funOf (funOf H e) t

namespace hApply

theorem isScottContinuous_H (e t : Pomega) :
    IsScottContinuous (fun H => hApply H e t) :=
  theorem_1_3 (f := fun u => funOf u t) (g := fun H => funOf H e)
    (funOf.isScottContinuous_left t) (funOf.isScottContinuous_left e)

theorem isScottContinuous_e (H t : Pomega) :
    IsScottContinuous (fun e => hApply H e t) :=
  theorem_1_3 (f := fun u => funOf u t) (g := funOf H)
    (funOf.isScottContinuous_left t) (funOf.isScottContinuous H)

theorem payload_isScottContinuous_e (H t : Pomega) (i : ℕ) :
    IsScottContinuous (fun e =>
      hApply H (funOf (expPayload e) (ofNat i)) t) :=
  theorem_1_3 (f := fun e => hApply H e t)
    (g := fun e => funOf (expPayload e) (ofNat i))
```

```
    (isScottContinuous_e H t)
    (theorem_1_3 (f := fun u => funOf u (ofNat i)) (g := expPayload)
      (funOf.isScottContinuous_left (ofNat i))
      (funOf.isScottContinuous_left (ofNat 1)))

end hApply

def hVar (e t : Pomega) : Pomega := funOf t (expPayload e)

namespace hVar

theorem isScottContinuous_t (e : Pomega) :
    IsScottContinuous (fun t => hVar e t) :=
  funOf.isScottContinuous_left (expPayload e)

theorem isScottContinuous_e (t : Pomega) :
    IsScottContinuous (fun e => hVar e t) :=
  theorem_1_3 (f := funOf t) (g := expPayload)
    (funOf.isScottContinuous t) (funOf.isScottContinuous_left (ofNat 1))

end hVar

def hZero : Pomega := funOf inleftC (ofNat 0)

def hApp (H e t : Pomega) : Pomega :=
  condSet (funOf whichC (hApply H (funOf (expPayload e) (ofNat 0)) t)) botElem
    (funOf (funOf outC (hApply H (funOf (expPayload e) (ofNat 0)) t))
      (hApply H (funOf (expPayload e) (ofNat 1)) t))

namespace hApp

theorem isScottContinuous_H (e t : Pomega) :
    IsScottContinuous (fun H => hApp H e t) :=
  ContinuityHelpers.nary
    (fun y z => condSet.isScottContinuous_left y z)
    (fun x z => condSet.isScottContinuous_mid x z)
    (fun x y => condSet.isScottContinuous_right x y)
    (theorem_1_3 (funOf.isScottContinuous whichC)
      (hApply.isScottContinuous_H _ t))
    (const_isScottContinuous botElem)
    (ContinuityHelpers.tuple
      (fun y => funOf.isScottContinuous_left y)
      (fun u => funOf.isScottContinuous u)
      (theorem_1_3 (funOf.isScottContinuous outC)
        (hApply.isScottContinuous_H _ t))
      (hApply.isScottContinuous_H _ t))

theorem isScottContinuous_t (H e : Pomega) :
    IsScottContinuous (fun t => hApp H e t) :=
  ContinuityHelpers.nary
    (fun y z => condSet.isScottContinuous_left y z)
    (fun x z => condSet.isScottContinuous_mid x z)
    (fun x y => condSet.isScottContinuous_right x y)
    (theorem_1_3 (f := funOf whichC)
      (g := fun t => hApply H (funOf (expPayload e) (ofNat 0)) t)
      (funOf.isScottContinuous whichC)
```

```
      (funOf.isScottContinuous (funOf H (funOf (expPayload e) (ofNat 0)))))
    (const_isScottContinuous botElem)
    (ContinuityHelpers.tuple
      (fun y => funOf.isScottContinuous_left y)
      (fun u => funOf.isScottContinuous u)
      (theorem_1_3 (f := funOf outC)
        (g := fun t => hApply H (funOf (expPayload e) (ofNat 0)) t)
        (funOf.isScottContinuous outC)
        (funOf.isScottContinuous (funOf H (funOf (expPayload e) (ofNat 0)))))
      (funOf.isScottContinuous (funOf H (funOf (expPayload e) (ofNat 1)))))

theorem isScottContinuous_e (H t : Pomega) :
    IsScottContinuous (fun e => hApp H e t) :=
  ContinuityHelpers.nary
    (fun y z => condSet.isScottContinuous_left y z)
    (fun x z => condSet.isScottContinuous_mid x z)
    (fun x y => condSet.isScottContinuous_right x y)
    (theorem_1_3 (f := funOf whichC)
      (g := fun e => hApply H (funOf (expPayload e) (ofNat 0)) t)
      (funOf.isScottContinuous whichC)
      (hApply.payload_isScottContinuous_e H t 0))
    (const_isScottContinuous botElem)
    (ContinuityHelpers.tuple
      (fun y => funOf.isScottContinuous_left y)
      (fun u => funOf.isScottContinuous u)
      (theorem_1_3 (f := funOf outC)
        (g := fun e => hApply H (funOf (expPayload e) (ofNat 0)) t)
        (funOf.isScottContinuous outC)
        (hApply.payload_isScottContinuous_e H t 0))
      (hApply.payload_isScottContinuous_e H t 1))

end hApp

def hSucc (H e t : Pomega) : Pomega :=
  condSet (funOf whichC (hApply H (expPayload e) t))
    (funOf inleftC (succSet (funOf outC (hApply H (expPayload e) t))))
    botElem

namespace hSucc

theorem isScottContinuous_H (e t : Pomega) :
    IsScottContinuous (fun H => hSucc H e t) :=
  ContinuityHelpers.nary
    (fun y z => condSet.isScottContinuous_left y z)
    (fun x z => condSet.isScottContinuous_mid x z)
    (fun x y => condSet.isScottContinuous_right x y)
    (theorem_1_3 (funOf.isScottContinuous whichC) (hApply.isScottContinuous_H _ t))
    (theorem_1_3 (funOf.isScottContinuous inleftC)
      (theorem_1_3 succSet.isScottContinuous
        (theorem_1_3 (funOf.isScottContinuous outC)
          (hApply.isScottContinuous_H _ t))))
    (const_isScottContinuous botElem)

theorem isScottContinuous_t (H e : Pomega) :
    IsScottContinuous (fun t => hSucc H e t) :=
  ContinuityHelpers.nary
```

```
    (fun y z => condSet.isScottContinuous_left y z)
    (fun x z => condSet.isScottContinuous_mid x z)
    (fun x y => condSet.isScottContinuous_right x y)
    (theorem_1_3 (f := funOf whichC) (g := fun t => hApply H (expPayload e) t)
      (funOf.isScottContinuous whichC)
      (funOf.isScottContinuous (funOf H (expPayload e))))
    (theorem_1_3 (f := funOf inleftC)
      (g := fun t => succSet (funOf outC (hApply H (expPayload e) t)))
      (funOf.isScottContinuous inleftC)
      (theorem_1_3 (f := succSet)
        (g := fun t => funOf outC (hApply H (expPayload e) t))
        succSet.isScottContinuous
        (theorem_1_3 (f := funOf outC) (g := fun t => hApply H (expPayload e) t)
          (funOf.isScottContinuous outC)
          (funOf.isScottContinuous (funOf H (expPayload e))))))
    (const_isScottContinuous botElem)

theorem isScottContinuous_e (H t : Pomega) :
    IsScottContinuous (fun e => hSucc H e t) :=
  let hrec :=
    theorem_1_3 (f := fun e => hApply H e t) (g := expPayload)
      (hApply.isScottContinuous_e H t)
      (funOf.isScottContinuous_left (ofNat 1))
  ContinuityHelpers.nary
    (fun y z => condSet.isScottContinuous_left y z)
    (fun x z => condSet.isScottContinuous_mid x z)
    (fun x y => condSet.isScottContinuous_right x y)
    (theorem_1_3 (f := funOf whichC) (g := fun e => hApply H (expPayload e) t)
      (funOf.isScottContinuous whichC) hrec)
    (theorem_1_3 (f := funOf inleftC)
      (g := fun e => succSet (funOf outC (hApply H (expPayload e) t)))
      (funOf.isScottContinuous inleftC)
      (theorem_1_3 (f := succSet)
        (g := fun e => funOf outC (hApply H (expPayload e) t))
        succSet.isScottContinuous
        (theorem_1_3 (f := funOf outC) (g := fun e => hApply H (expPayload e) t)
          (funOf.isScottContinuous outC) hrec)))
    (const_isScottContinuous botElem)

end hSucc

def hPred (H e t : Pomega) : Pomega :=
  condSet (funOf whichC (hApply H (expPayload e) t))
    (funOf inleftC (predSet (funOf outC (hApply H (expPayload e) t))))
    botElem

namespace hPred

theorem isScottContinuous_H (e t : Pomega) :
    IsScottContinuous (fun H => hPred H e t) :=
  ContinuityHelpers.nary
    (fun y z => condSet.isScottContinuous_left y z)
    (fun x z => condSet.isScottContinuous_mid x z)
    (fun x y => condSet.isScottContinuous_right x y)
    (theorem_1_3 (funOf.isScottContinuous whichC) (hApply.isScottContinuous_H _ t))
    (theorem_1_3 (funOf.isScottContinuous inleftC)
```

```
      (theorem_1_3 predSet.isScottContinuous
        (theorem_1_3 (funOf.isScottContinuous outC)
          (hApply.isScottContinuous_H _ t))))
    (const_isScottContinuous botElem)

theorem isScottContinuous_t (H e : Pomega) :
    IsScottContinuous (fun t => hPred H e t) :=
  ContinuityHelpers.nary
    (fun y z => condSet.isScottContinuous_left y z)
    (fun x z => condSet.isScottContinuous_mid x z)
    (fun x y => condSet.isScottContinuous_right x y)
    (theorem_1_3 (f := funOf whichC) (g := fun t => hApply H (expPayload e) t)
      (funOf.isScottContinuous whichC)
      (funOf.isScottContinuous (funOf H (expPayload e))))
    (theorem_1_3 (f := funOf inleftC)
      (g := fun t => predSet (funOf outC (hApply H (expPayload e) t)))
      (funOf.isScottContinuous inleftC)
      (theorem_1_3 (f := predSet)
        (g := fun t => funOf outC (hApply H (expPayload e) t))
        predSet.isScottContinuous
        (theorem_1_3 (f := funOf outC) (g := fun t => hApply H (expPayload e) t)
          (funOf.isScottContinuous outC)
          (funOf.isScottContinuous (funOf H (expPayload e))))))
    (const_isScottContinuous botElem)

theorem isScottContinuous_e (H t : Pomega) :
    IsScottContinuous (fun e => hPred H e t) :=
  let hrec :=
    theorem_1_3 (f := fun e => hApply H e t) (g := expPayload)
      (hApply.isScottContinuous_e H t)
      (funOf.isScottContinuous_left (ofNat 1))
  ContinuityHelpers.nary
    (fun y z => condSet.isScottContinuous_left y z)
    (fun x z => condSet.isScottContinuous_mid x z)
    (fun x y => condSet.isScottContinuous_right x y)
    (theorem_1_3 (f := funOf whichC) (g := fun e => hApply H (expPayload e) t)
      (funOf.isScottContinuous whichC) hrec)
    (theorem_1_3 (f := funOf inleftC)
      (g := fun e => predSet (funOf outC (hApply H (expPayload e) t)))
      (funOf.isScottContinuous inleftC)
      (theorem_1_3 (f := predSet)
        (g := fun e => funOf outC (hApply H (expPayload e) t))
        predSet.isScottContinuous
        (theorem_1_3 (f := funOf outC) (g := fun e => hApply H (expPayload e) t)
          (funOf.isScottContinuous outC) hrec)))
    (const_isScottContinuous botElem)

end hPred

def hCond (H e t : Pomega) : Pomega :=
  funOf lambR
    (condSet (funOf whichC (hApply H (funOf (expPayload e) (ofNat 0)) t))
      (condSet (funOf outC (hApply H (funOf (expPayload e) (ofNat 0)) t))
        (hApply H (funOf (expPayload e) (ofNat 1)) t)
        (hApply H (funOf (expPayload e) (ofNat 2)) t))
      (hApply H (funOf (expPayload e) (ofNat 3)) t))
```

```
namespace hCond

theorem isScottContinuous_H (e t : Pomega) :
    IsScottContinuous (fun H => hCond H e t) :=
  theorem_1_3 (funOf.isScottContinuous lambR)
    (ContinuityHelpers.nary
      (fun y z => condSet.isScottContinuous_left y z)
      (fun x z => condSet.isScottContinuous_mid x z)
      (fun x y => condSet.isScottContinuous_right x y)
      (theorem_1_3 (funOf.isScottContinuous whichC)
        (hApply.isScottContinuous_H _ t))
      (ContinuityHelpers.nary
        (fun y z => condSet.isScottContinuous_left y z)
        (fun x z => condSet.isScottContinuous_mid x z)
        (fun x y => condSet.isScottContinuous_right x y)
        (theorem_1_3 (funOf.isScottContinuous outC)
          (hApply.isScottContinuous_H _ t))
        (hApply.isScottContinuous_H _ t)
        (hApply.isScottContinuous_H _ t))
      (hApply.isScottContinuous_H _ t))

theorem isScottContinuous_t (H e : Pomega) :
    IsScottContinuous (fun t => hCond H e t) :=
  theorem_1_3 (f := funOf lambR)
    (g := fun t =>
      condSet (funOf whichC (hApply H (funOf (expPayload e) (ofNat 0)) t))
        (condSet (funOf outC (hApply H (funOf (expPayload e) (ofNat 0)) t))
          (hApply H (funOf (expPayload e) (ofNat 1)) t)
          (hApply H (funOf (expPayload e) (ofNat 2)) t))
        (hApply H (funOf (expPayload e) (ofNat 3)) t))
    (funOf.isScottContinuous lambR)
    (ContinuityHelpers.nary
      (fun y z => condSet.isScottContinuous_left y z)
      (fun x z => condSet.isScottContinuous_mid x z)
      (fun x y => condSet.isScottContinuous_right x y)
      (theorem_1_3 (f := funOf whichC)
        (g := fun t => hApply H (funOf (expPayload e) (ofNat 0)) t)
        (funOf.isScottContinuous whichC)
        (funOf.isScottContinuous (funOf H (funOf (expPayload e) (ofNat 0)))))
      (ContinuityHelpers.nary
        (fun y z => condSet.isScottContinuous_left y z)
        (fun x z => condSet.isScottContinuous_mid x z)
        (fun x y => condSet.isScottContinuous_right x y)
        (theorem_1_3 (f := funOf outC)
          (g := fun t => hApply H (funOf (expPayload e) (ofNat 0)) t)
          (funOf.isScottContinuous outC)
          (funOf.isScottContinuous (funOf H (funOf (expPayload e) (ofNat 0)))))
        (funOf.isScottContinuous (funOf H (funOf (expPayload e) (ofNat 1))))
        (funOf.isScottContinuous (funOf H (funOf (expPayload e) (ofNat 2)))))
      (funOf.isScottContinuous (funOf H (funOf (expPayload e) (ofNat 3)))))

theorem isScottContinuous_e (H t : Pomega) :
    IsScottContinuous (fun e => hCond H e t) :=
  theorem_1_3 (f := funOf lambR)
    (g := fun e =>
```

```
      condSet (funOf whichC (hApply H (funOf (expPayload e) (ofNat 0)) t))
        (condSet (funOf outC (hApply H (funOf (expPayload e) (ofNat 0)) t))
          (hApply H (funOf (expPayload e) (ofNat 1)) t)
          (hApply H (funOf (expPayload e) (ofNat 2)) t))
        (hApply H (funOf (expPayload e) (ofNat 3)) t))
    (funOf.isScottContinuous lambR)
    (ContinuityHelpers.nary
      (fun y z => condSet.isScottContinuous_left y z)
      (fun x z => condSet.isScottContinuous_mid x z)
      (fun x y => condSet.isScottContinuous_right x y)
      (theorem_1_3 (f := funOf whichC)
        (g := fun e => hApply H (funOf (expPayload e) (ofNat 0)) t)
        (funOf.isScottContinuous whichC)
        (hApply.payload_isScottContinuous_e H t 0))
      (ContinuityHelpers.nary
        (fun y z => condSet.isScottContinuous_left y z)
        (fun x z => condSet.isScottContinuous_mid x z)
        (fun x y => condSet.isScottContinuous_right x y)
        (theorem_1_3 (f := funOf outC)
          (g := fun e => hApply H (funOf (expPayload e) (ofNat 0)) t)
          (funOf.isScottContinuous outC)


          (hApply.payload_isScottContinuous_e H t 0))
        (hApply.payload_isScottContinuous_e H t 1)
        (hApply.payload_isScottContinuous_e H t 2))
      (hApply.payload_isScottContinuous_e H t 3))

end hCond

def hLam (H e t : Pomega) : Pomega :=
  funOf inrightC
    (graph (fun x =>
      hApply H (funOf (expPayload e) (ofNat 1))
        (updateEnv.union t x (funOf (expPayload e) (ofNat 0)))))

namespace hLam

theorem isScottContinuous_H (e t : Pomega) :
    IsScottContinuous (fun H => hLam H e t) :=
  theorem_1_3 (funOf.isScottContinuous inrightC)
    (graph_const_isScottContinuous
      (fun H x =>
        hApply H (funOf (expPayload e) (ofNat 1))
          (updateEnv.union t x (funOf (expPayload e) (ofNat 0))))
      (fun _ => hApply.isScottContinuous_H _ _))

theorem isScottContinuous_t (H e : Pomega) :
    IsScottContinuous (fun t => hLam H e t) :=
  theorem_1_3 (f := funOf inrightC)
    (g := fun t =>
      graph (fun x =>
        hApply H (funOf (expPayload e) (ofNat 1))
          (updateEnv.union t x (funOf (expPayload e) (ofNat 0)))))
    (funOf.isScottContinuous inrightC)
    (graph_const_isScottContinuous
      (fun t x =>
```

```
        hApply H (funOf (expPayload e) (ofNat 1))
          (updateEnv.union t x (funOf (expPayload e) (ofNat 0))))
      (fun x =>
        theorem_1_3
          (f := funOf (funOf H (funOf (expPayload e) (ofNat 1))))
          (g := fun t => updateEnv.union t x (funOf (expPayload e) (ofNat 0)))
          (funOf.isScottContinuous (funOf H (funOf (expPayload e) (ofNat 1))))
          (updateEnv.union_isScottContinuous_t x
            (funOf (expPayload e) (ofNat 0)))))

theorem isScottContinuous_e (H t : Pomega) :
    IsScottContinuous (fun e => hLam H e t) :=
  theorem_1_3 (f := funOf inrightC)
    (g := fun e =>
      graph (fun x =>
        hApply H (funOf (expPayload e) (ofNat 1))
          (updateEnv.union t x (funOf (expPayload e) (ofNat 0)))))
    (funOf.isScottContinuous inrightC)
    (graph_const_isScottContinuous
      (fun e x =>
        hApply H (funOf (expPayload e) (ofNat 1))
          (updateEnv.union t x (funOf (expPayload e) (ofNat 0))))
      (fun x =>
        ContinuityHelpers.tuple
          (fun y =>
            theorem_1_3 (f := fun u => funOf u y) (g := funOf H)
              (funOf.isScottContinuous_left y) (funOf.isScottContinuous H))
          (fun u => funOf.isScottContinuous (funOf H u))
          (theorem_1_3 (f := fun u => funOf u (ofNat 1)) (g := expPayload)
            (funOf.isScottContinuous_left (ofNat 1))
            (funOf.isScottContinuous_left (ofNat 1)))
          (theorem_1_3 (f := updateEnv.union t x)
            (g := fun e => funOf (expPayload e) (ofNat 0))
            (updateEnv.isScottContinuous_idx t x)
            (theorem_1_3 (f := fun u => funOf u (ofNat 0)) (g := expPayload)
              (funOf.isScottContinuous_left (ofNat 0))
              (funOf.isScottContinuous_left (ofNat 1)))))))

end hLam

def Hstep (H e t : Pomega) : Pomega :=
  dcondSet (expTag e) (hVar e t)
    (dcondSet (predSet (expTag e)) hZero
      (dcondSet (predSet (predSet (expTag e))) (hSucc H e t)
        (dcondSet (predSet^[3] (expTag e)) (hPred H e t)
          (dcondSet (predSet^[4] (expTag e)) (hCond H e t)
            (dcondSet (predSet^[5] (expTag e)) (hApp H e t)
              (dcondSet (predSet^[6] (expTag e)) (hLam H e t)
                topElem))))))

namespace Hstep

theorem tag0 (H x t : Pomega) :
    Hstep H (tagInj 0 x) t = funOf t x := by
  simp only [Hstep, expTag, expPayload, hVar, tagInj.zero, tagInj.one,
    dcondSet.ofNat_zero]
```

```
theorem tag1 (H x t : Pomega) :
    Hstep H (tagInj 1 x) t = hZero := by
  simp only [Hstep, expTag, tagInj.zero, predSet.ofNat_succ,
    dcondSet.ofNat_one, dcondSet.ofNat_zero]

theorem tag2 (H x t : Pomega) :
    Hstep H (tagInj 2 x) t = hSucc H (tagInj 2 x) t := by
  simp only [Hstep, expTag, tagInj.zero, predSet.ofNat_succ,
    dcondSet.ofNat_succ, dcondSet.ofNat_zero]

theorem tag3 (H x t : Pomega) :
    Hstep H (tagInj 3 x) t = hPred H (tagInj 3 x) t := by
  simp only [Hstep, expTag, tagInj.zero, dcondSet.ofNat_succ,
    predSet.ofNat_succ, PlotkinHelpers.predSet_iterate_self,
    dcondSet.ofNat_zero]

theorem tag4 (H x t : Pomega) :
    Hstep H (tagInj 4 x) t = hCond H (tagInj 4 x) t := by
  simp only [Hstep, expTag, tagInj.zero, dcondSet.ofNat_succ,
    predSet.ofNat_succ, PlotkinHelpers.predSet_iterate_ofNat (k := 3) (i := 1),
    PlotkinHelpers.predSet_iterate_self, dcondSet.ofNat_zero]

theorem tag5 (H x t : Pomega) :
    Hstep H (tagInj 5 x) t = hApp H (tagInj 5 x) t := by
  simp only [Hstep, expTag, tagInj.zero, dcondSet.ofNat_succ,
    predSet.ofNat_succ, PlotkinHelpers.predSet_iterate_ofNat (k := 3) (i := 2),
    PlotkinHelpers.predSet_iterate_ofNat (k := 4) (i := 1),
    PlotkinHelpers.predSet_iterate_self, dcondSet.ofNat_zero]

theorem tag6 (H x t : Pomega) :
    Hstep H (tagInj 6 x) t = hLam H (tagInj 6 x) t := by
  simp only [Hstep, expTag, tagInj.zero, dcondSet.ofNat_succ,
    predSet.ofNat_succ, PlotkinHelpers.predSet_iterate_ofNat (k := 3) (i := 3),
    PlotkinHelpers.predSet_iterate_ofNat (k := 4) (i := 2),
    PlotkinHelpers.predSet_iterate_ofNat (k := 5) (i := 1),
    PlotkinHelpers.predSet_iterate_self, dcondSet.ofNat_zero]

theorem isScottContinuous_H (e t : Pomega) :
    IsScottContinuous (fun H => Hstep H e t) :=
  ContinuityHelpers.nary
    (fun y z => dcondSet.isScottContinuous_left y z)
    (fun x z => dcondSet.isScottContinuous_mid x z)
    (fun x y => dcondSet.isScottContinuous_right x y)
    (const_isScottContinuous (expTag e)) (const_isScottContinuous (hVar e t))
    (ContinuityHelpers.nary
      (fun y z => dcondSet.isScottContinuous_left y z)
      (fun x z => dcondSet.isScottContinuous_mid x z)
      (fun x y => dcondSet.isScottContinuous_right x y)
      (const_isScottContinuous (predSet (expTag e)))
      (const_isScottContinuous hZero)
      (ContinuityHelpers.nary
        (fun y z => dcondSet.isScottContinuous_left y z)
        (fun x z => dcondSet.isScottContinuous_mid x z)
        (fun x y => dcondSet.isScottContinuous_right x y)
        (const_isScottContinuous (predSet (predSet (expTag e))))
```

```
        (hSucc.isScottContinuous_H e t)
        (ContinuityHelpers.nary
          (fun y z => dcondSet.isScottContinuous_left y z)
          (fun x z => dcondSet.isScottContinuous_mid x z)
          (fun x y => dcondSet.isScottContinuous_right x y)
          (const_isScottContinuous (predSet^[3] (expTag e)))
          (hPred.isScottContinuous_H e t)
          (ContinuityHelpers.nary
            (fun y z => dcondSet.isScottContinuous_left y z)
            (fun x z => dcondSet.isScottContinuous_mid x z)
            (fun x y => dcondSet.isScottContinuous_right x y)
            (const_isScottContinuous (predSet^[4] (expTag e)))
            (hCond.isScottContinuous_H e t)
            (ContinuityHelpers.nary
              (fun y z => dcondSet.isScottContinuous_left y z)
              (fun x z => dcondSet.isScottContinuous_mid x z)
              (fun x y => dcondSet.isScottContinuous_right x y)
              (const_isScottContinuous (predSet^[5] (expTag e)))
              (hApp.isScottContinuous_H e t)
              (ContinuityHelpers.nary
                (fun y z => dcondSet.isScottContinuous_left y z)
                (fun x z => dcondSet.isScottContinuous_mid x z)
                (fun x y => dcondSet.isScottContinuous_right x y)
                (const_isScottContinuous (predSet^[6] (expTag e)))
                (hLam.isScottContinuous_H e t)
                (const_isScottContinuous topElem)))))))

theorem isScottContinuous_t (H e : Pomega) :
    IsScottContinuous (fun t => Hstep H e t) :=
  ContinuityHelpers.nary
    (fun y z => dcondSet.isScottContinuous_left y z)
    (fun x z => dcondSet.isScottContinuous_mid x z)
    (fun x y => dcondSet.isScottContinuous_right x y)
    (const_isScottContinuous (expTag e))
    (hVar.isScottContinuous_t e)
    (ContinuityHelpers.nary
      (fun y z => dcondSet.isScottContinuous_left y z)
      (fun x z => dcondSet.isScottContinuous_mid x z)
      (fun x y => dcondSet.isScottContinuous_right x y)
      (const_isScottContinuous (predSet (expTag e)))
      (const_isScottContinuous hZero)
      (ContinuityHelpers.nary
        (fun y z => dcondSet.isScottContinuous_left y z)
        (fun x z => dcondSet.isScottContinuous_mid x z)
        (fun x y => dcondSet.isScottContinuous_right x y)
        (const_isScottContinuous (predSet (predSet (expTag e))))
        (hSucc.isScottContinuous_t H e)
        (ContinuityHelpers.nary
          (fun y z => dcondSet.isScottContinuous_left y z)
          (fun x z => dcondSet.isScottContinuous_mid x z)
          (fun x y => dcondSet.isScottContinuous_right x y)
          (const_isScottContinuous (predSet^[3] (expTag e)))
          (hPred.isScottContinuous_t H e)
          (ContinuityHelpers.nary
            (fun y z => dcondSet.isScottContinuous_left y z)
            (fun x z => dcondSet.isScottContinuous_mid x z)
```

```
            (fun x y => dcondSet.isScottContinuous_right x y)
            (const_isScottContinuous (predSet^[4] (expTag e)))
            (hCond.isScottContinuous_t H e)
            (ContinuityHelpers.nary
              (fun y z => dcondSet.isScottContinuous_left y z)
              (fun x z => dcondSet.isScottContinuous_mid x z)
              (fun x y => dcondSet.isScottContinuous_right x y)
              (const_isScottContinuous (predSet^[5] (expTag e)))
              (hApp.isScottContinuous_t H e)
              (ContinuityHelpers.nary
                (fun y z => dcondSet.isScottContinuous_left y z)
                (fun x z => dcondSet.isScottContinuous_mid x z)
                (fun x y => dcondSet.isScottContinuous_right x y)
                (const_isScottContinuous (predSet^[6] (expTag e)))
                (hLam.isScottContinuous_t H e)
                (const_isScottContinuous topElem)))))))

theorem isScottContinuous_e (H t : Pomega) :
    IsScottContinuous (fun e => Hstep H e t) :=
  ContinuityHelpers.nary
    (fun y z => dcondSet.isScottContinuous_left y z)
    (fun x z => dcondSet.isScottContinuous_mid x z)
    (fun x y => dcondSet.isScottContinuous_right x y)
    (funOf.isScottContinuous_left (ofNat 0))
    (hVar.isScottContinuous_e t)
    (ContinuityHelpers.nary
      (fun y z => dcondSet.isScottContinuous_left y z)
      (fun x z => dcondSet.isScottContinuous_mid x z)
      (fun x y => dcondSet.isScottContinuous_right x y)
      (PlotkinHelpers.predSet_iterate_expTag_isScottContinuous 1)
      (const_isScottContinuous hZero)
      (ContinuityHelpers.nary
        (fun y z => dcondSet.isScottContinuous_left y z)
        (fun x z => dcondSet.isScottContinuous_mid x z)
        (fun x y => dcondSet.isScottContinuous_right x y)
        (PlotkinHelpers.predSet_iterate_expTag_isScottContinuous 2)
        (hSucc.isScottContinuous_e H t)
        (ContinuityHelpers.nary
          (fun y z => dcondSet.isScottContinuous_left y z)
          (fun x z => dcondSet.isScottContinuous_mid x z)
          (fun x y => dcondSet.isScottContinuous_right x y)
          (PlotkinHelpers.predSet_iterate_expTag_isScottContinuous 3)
          (hPred.isScottContinuous_e H t)
          (ContinuityHelpers.nary
            (fun y z => dcondSet.isScottContinuous_left y z)
            (fun x z => dcondSet.isScottContinuous_mid x z)
            (fun x y => dcondSet.isScottContinuous_right x y)
            (PlotkinHelpers.predSet_iterate_expTag_isScottContinuous 4)
            (hCond.isScottContinuous_e H t)
            (ContinuityHelpers.nary
              (fun y z => dcondSet.isScottContinuous_left y z)
              (fun x z => dcondSet.isScottContinuous_mid x z)
              (fun x y => dcondSet.isScottContinuous_right x y)
              (PlotkinHelpers.predSet_iterate_expTag_isScottContinuous 5)
              (hApp.isScottContinuous_e H t)
              (ContinuityHelpers.nary
```

```
                (fun y z => dcondSet.isScottContinuous_left y z)
                (fun x z => dcondSet.isScottContinuous_mid x z)
                (fun x y => dcondSet.isScottContinuous_right x y)
                (PlotkinHelpers.predSet_iterate_expTag_isScottContinuous 6)
                (hLam.isScottContinuous_e H t)
                (const_isScottContinuous topElem)))))))
end Hstep

def HF (H : Pomega) : Pomega :=
  graph (fun e => graph (fun t => Hstep H e t))

namespace HF

theorem inner_isScottContinuous (H : Pomega) :
    IsScottContinuous (fun e => graph (fun t => Hstep H e t)) :=
  graph_const_isScottContinuous (fun e t => Hstep H e t)
    (fun t => Hstep.isScottContinuous_e H t)

theorem isScottContinuous : IsScottContinuous HF :=
  graph_const_isScottContinuous
    (fun H e => graph (fun t => Hstep H e t))
    (fun e => graph_const_isScottContinuous (fun H t => Hstep H e t)
      (fun t => Hstep.isScottContinuous_H e t))

theorem app (H e : Pomega) :
    funOf (HF H) e = graph (fun t => Hstep H e t) :=
  beta (HF.inner_isScottContinuous H) e

theorem app2 (H e t : Pomega) :
    funOf (funOf (HF H) e) t = Hstep H e t := by
  rw [HF.app]
  exact beta (Hstep.isScottContinuous_t H e) t

end HF

def Hinterp : LambTerm → Pomega → Pomega
  | .var n, t => funOf t (ofNat n)
  | .zero, _ => funOf inleftC (ofNat 0)
  | .succ τ, t =>
      condSet (funOf whichC (Hinterp τ t))
        (funOf inleftC (succSet (funOf outC (Hinterp τ t))))
        botElem
  | .pred τ, t =>
      condSet (funOf whichC (Hinterp τ t))
        (funOf inleftC (predSet (funOf outC (Hinterp τ t))))
        botElem
  | .condq ? τ σ ?, t =>
      funOf lambR (condSet (funOf whichC (Hinterp ? t))
        (condSet (funOf outC (Hinterp ? t)) (Hinterp τ t) (Hinterp σ t))
        (Hinterp ? t))
  | .app τ σ, t =>
      condSet (funOf whichC (Hinterp τ t)) botElem
        (funOf (funOf outC (Hinterp τ t)) (Hinterp σ t))
  | .lam n τ, t =>
      funOf inrightC (graph (fun x => Hinterp τ (updateEnv t x n)))
```

```
namespace Hinterp

theorem isScottContinuous (τ : LambTerm) :
    IsScottContinuous (Hinterp τ) := by
  induction τ with
  | var n =>
    exact funOf.isScottContinuous_left (ofNat n)
  | zero =>
    exact const_isScottContinuous _
  | succ τ ih =>
    exact ContinuityHelpers.nary
      (fun y z => condSet.isScottContinuous_left y z)
      (fun x z => condSet.isScottContinuous_mid x z)
      (fun x y => condSet.isScottContinuous_right x y)
      (theorem_1_3 (funOf.isScottContinuous whichC) ih)
      (theorem_1_3 (funOf.isScottContinuous inleftC)
        (theorem_1_3 succSet.isScottContinuous
          (theorem_1_3 (funOf.isScottContinuous outC) ih)))
      (const_isScottContinuous botElem)
  | pred τ ih =>
    exact ContinuityHelpers.nary
      (fun y z => condSet.isScottContinuous_left y z)
      (fun x z => condSet.isScottContinuous_mid x z)
      (fun x y => condSet.isScottContinuous_right x y)
      (theorem_1_3 (funOf.isScottContinuous whichC) ih)
      (theorem_1_3 (funOf.isScottContinuous inleftC)
        (theorem_1_3 predSet.isScottContinuous
          (theorem_1_3 (funOf.isScottContinuous outC) ih)))
      (const_isScottContinuous botElem)
  | condq ? τ σ ? ih? ihτ ihσ ih? =>
    exact theorem_1_3 (f := funOf lambR)
      (g := fun t =>
        condSet (funOf whichC (Hinterp ? t))
          (condSet (funOf outC (Hinterp ? t)) (Hinterp τ t) (Hinterp σ t))
          (Hinterp ? t))
      (funOf.isScottContinuous lambR)
      (ContinuityHelpers.nary
        (fun y z => condSet.isScottContinuous_left y z)
        (fun x z => condSet.isScottContinuous_mid x z)
        (fun x y => condSet.isScottContinuous_right x y)
        (theorem_1_3 (funOf.isScottContinuous whichC) ih?)
        (ContinuityHelpers.nary
          (fun y z => condSet.isScottContinuous_left y z)
          (fun x z => condSet.isScottContinuous_mid x z)
          (fun x y => condSet.isScottContinuous_right x y)
          (theorem_1_3 (funOf.isScottContinuous outC) ih?) ihτ ihσ)
        ih?)
  | app τ σ ihτ ihσ =>
    exact ContinuityHelpers.nary
      (fun y z => condSet.isScottContinuous_left y z)
      (fun x z => condSet.isScottContinuous_mid x z)
      (fun x y => condSet.isScottContinuous_right x y)
      (theorem_1_3 (funOf.isScottContinuous whichC) ihτ)
      (const_isScottContinuous botElem)
      (ContinuityHelpers.tuple
        (fun y => funOf.isScottContinuous_left y)
```

```
        (fun u => funOf.isScottContinuous u)
        (theorem_1_3 (funOf.isScottContinuous outC) ihτ) ihσ)
  | lam n τ ih =>
    exact theorem_1_3 (f := funOf inrightC)
      (g := fun t => graph (fun x => Hinterp τ (updateEnv t x n)))
      (funOf.isScottContinuous inrightC)
      (graph_const_isScottContinuous
        (fun t x => Hinterp τ (updateEnv t x n))
        (fun x => theorem_1_3 ih
          (graph_const_isScottContinuous
            (fun t m => if m = ofNat n then x else funOf t m)
            (fun m => by
              by_cases h : m = ofNat n
              · simpa [h] using const_isScottContinuous (c := x)
              · simpa [h] using funOf.isScottContinuous_left m))))

end Hinterp

def Hfun : Pomega := fix HF

namespace Hfun

theorem fixed : HF Hfun = Hfun :=
  (theorem_1_4 HF.isScottContinuous).1

theorem app2 (e t : Pomega) :
    funOf (funOf Hfun e) t = Hstep Hfun e t := by
  have h := congrArg (fun H => funOf (funOf H e) t) fixed
  simpa [HF.app2] using h.symm


theorem interp : ∀ τ : LambTerm, ∀ t : Pomega,
    funOf (funOf Hfun (encodeExp τ)) t = Hinterp τ t := by
  intro τ
  induction τ with
  | var n =>
    intro t
    rw [app2, encodeExp, Hstep.tag0]
    rfl
  | zero =>
    intro t
    rw [app2, encodeExp, Hstep.tag1]
    rfl
  | succ τ ih =>
    intro t
    rw [app2, encodeExp, Hstep.tag2]
    simp only [hSucc, hApply, expPayload, tagInj.one]
    rw [ih]
    rfl
  | pred τ ih =>
    intro t
    rw [app2, encodeExp, Hstep.tag3]
    simp only [hPred, hApply, expPayload, tagInj.one]
    rw [ih]
    rfl
  | condq ? τ σ ? ih? ihτ ihσ ih? =>
    intro t
```

```
    rw [app2, encodeExp, Hstep.tag4]
    simp only [hCond, hApply, expPayload, tagInj.one, seq4.zero,
      seq4.one, seq4.two, seq4.three]
    rw [ih?, ihτ, ihσ, ih?]
    rfl
  | app τ σ ihτ ihσ =>
    intro t
    rw [app2, encodeExp, Hstep.tag5]
    simp only [hApp, hApply, expPayload, tagInj.one, PairSeq.app_zero,
      PairSeq.app_one]
    rw [ihτ, ihσ]
    rfl
  | lam n τ ih =>
    intro t
    rw [app2, encodeExp, Hstep.tag6]
    simp only [hLam, hApply, expPayload, tagInj.one, PairSeq.app_zero,
      PairSeq.app_one, updateEnv.ofNat]
    congr 1
    apply congrArg graph
    funext x
    exact ih _

theorem decode (τ : LambTerm) :
    funOf Hfun (encodeExp τ) = graph (Hinterp τ) := by
  have hβ : funOf Hfun (encodeExp τ) = graph (fun t => Hstep Hfun (encodeExp τ) t) :=
    by
    have := congrArg (fun H => funOf H (encodeExp τ)) fixed
    simpa [HF.app] using this.symm
  refine hβ.trans ?_
  apply congrArg graph
  funext t
  simpa [app2] using interp τ t

end Hfun

def Htyped (τ : LambTerm) : Pomega :=
  funOf (arrowR envR lambR) (graph (Hinterp τ))

namespace Htyped

theorem app (τ : LambTerm) (t : Pomega) :
    funOf (Htyped τ) t = funOf lambR (Hinterp τ (funOf envR t)) := by
  rw [Htyped, arrowR.app]
  simp only [comp.app]
  apply congrArg (funOf lambR)
  exact beta (Hinterp.isScottContinuous τ) (funOf envR t)

theorem typed (τ : LambTerm) :
    typed (Htyped τ) (arrowR envR lambR) :=
  typed.apply_retract
    (arrowR.isRetract envR.isRetract lambR.isRetract)

end Htyped

def Hcomb : Pomega :=
  funOf (arrowR expR (arrowR envR lambR)) Hfun
```

```
namespace Hcomb

theorem app (e : Pomega) :
    funOf Hcomb e =
      funOf (arrowR envR lambR) (funOf Hfun (funOf expR e)) := by
  rw [Hcomb, arrowR.app]
  simp only [comp.app]

theorem typed :
    typed Hcomb (arrowR expR (arrowR envR lambR)) :=
  typed.apply_retract
    (arrowR.isRetract expR.isRetract
      (arrowR.isRetract envR.isRetract lambR.isRetract))

end Hcomb

theorem eq_4_45 (τ : LambTerm) :
    typed (encodeExp τ) expR ∧
      typed (Htyped τ) (arrowR envR lambR) ∧
        funOf Hcomb (encodeExp τ) = Htyped τ := by
  refine ⟨encodeExp.typed τ, Htyped.typed τ, ?_⟩
  rw [Hcomb.app, ← encodeExp.typed τ, Hfun.decode]
  rfl

end DomainTheory.DataTypesAsLattices
```

2.5.18 Theorem 4.6 ✓

THEOREM 4.6 (The limit theorem).

Limit. *Suppose F is a continuous function that maps retracts to retracts and let $c = \mathbf{Y}(F)$. Then c is also a retract.*

inverse_limit. *If in addition F maps strict retracts to strict retracts and is monotone in the sense that $a \sqsubseteq b$ implies $F(a) \sqsubseteq F(b)$ for all (strict) retracts a and b, then the range of c is homeomorphic to the inverse limit of the ranges of the strict retracts $F^n(\bot)$ for $n \in \omega$.*

This can be applied to the case of (4.38) where $F = \lambda z.\, \mathbf{nil} \oplus (z \otimes z)$. Thus we can analyze **tree** as an inverse limit. This approach has the great advantage over the earlier method of the author where limits were required in showing that **tree** exists. Here we use **Y** to give existence at once, and then apply Theorems 4.3–4.5 to figure out the nature of the retract.

In Theorem 4.6, the fact that c is a retract can be reasoned as follows: $\bot$ is a

retract. Thus each $F^n(\bot)$ is a retract. We compute:

$$c \circ c = \bigcup\{F^n(\bot) \mid n \in \omega\} \circ \bigcup\{F^n(\bot) \mid n \in \omega\}$$

$$= \bigcup\{F^n(\bot) \circ F^n(\bot) \mid n \in \omega\} \quad \text{(Note: same } n.\text{)}$$

$$= \bigcup\{F^n(\bot) \mid n \in \omega\} = c.$$

In case F is monotone and preserves strictness, then we can argue that each $F^n(\bot) \sqsubseteq c$. The retracts $F^n(\bot)$ are the *projections* of c onto the terms of the limit. Of course $F^n(\bot) \sqsubseteq F^m(\bot)$ if $n \leq m$. The

$u : c$ can be put into a one-to-one correspondence (homeomorphism, lattice isomorphism) with the infinite sequences $\langle v_0, v_1, \ldots, v_n, \ldots\rangle$, where $v_n : F^n(\bot)$ and $v_n = F^n(\bot)(v_{n+1})$. Indeed $v_n = F^n(\bot)(u)$ and $u = \bigcup\{v_n \mid n \in \omega\}$. This is exactly the inverse limit construction.

Retreating from generalities back to the example of **tree**, we can grant that it exists and is provably a retract. Two things in its range are $\bot$ and $\top$ by Theorem 4.5(ii), but they are not so interesting. Now $\bot : \mathbf{nil}$, so by Theorem 4.5(ii) we have $\langle 0\rangle = \langle 0, \bot\rangle : \mathbf{tree}$. Let us think of this as *the* atom. What else can we have? If $x, y : \mathbf{tree}$, then $\langle x, y\rangle : \mathbf{tree} \otimes \mathbf{tree}$ and so $\langle 1, \langle x, y\rangle\rangle : \mathbf{tree}$. Thus (the range of) **tree** contains an atom and is closed under a binary operation. Note that the atomic and nonatomic trees are distinguished by **which** and that suitable constructor and destructor functions are definable on **tree**. But the space also contains infinite trees since we can solve for the least fixed point of:

$$t = \langle 1, \langle\langle 0\rangle, t\rangle\rangle$$

and $t : \mathbf{tree}$. (Why?) And there are many other examples of infinite elements in **tree**.

A point to stress in this construction is that **tree** being LAMBDA-definable is *computable*, and there are many computable functions definable on or to (the range of) **tree**. All the "structural" functions, for example, are computable. These are functions which in other languages would be called **isatom** or **construct** or **node**, and they are all easily LAMBDA-definable. Just as with $\oplus$, $\otimes$, $\circ\!\!\rightarrow$, they are not explicit in the *notation*, but they are definable nevertheless. In the case of **node**, we could use finite sequences of Boolean values to pick out or name nodes. Thus solve for $\mathbf{name} = \mathbf{nil} \oplus \mathbf{bool} \otimes \mathbf{name}$, and then give a recursive definition of:

$$\mathbf{node} : \mathbf{name}\circ\!\!\rightarrow (\mathbf{tree}\circ\!\!\rightarrow \mathbf{tree}).$$

Another example of this method can be illustrated, if the reader will recall the Gödel numbering of § 3. It will be seen that there are similarities with the **tree** construction: instead of 0 and $\mathbf{apply}(n)(m)$, **tree** uses $\langle 0\rangle$ and $\langle 1, \langle x, y\rangle\rangle$. Note, however, that Gödel numbers are *finite* while **tree** has *infinite* objects. But the infinite objects are always *limits* of finite objects, so there *are* connections. (We discuss this again in § 6.) In particular, recursive definitions on Gödel numbers, like that of **val**, have analogues on **tree**. Here is the companion of (3.7):

$$(4.46)\quad \mathbf{vaal} = \lambda x : \mathbf{tree}.\, \mathbf{which}(x) \supset \mathbf{G},\ \mathbf{vaal}(\mathbf{fst}(\mathbf{out}(x)))(\mathbf{vaal}(\mathbf{snd}(\mathbf{out}(x)))).$$

We have $\mathbf{vaal} : \mathbf{tree} \rightarrow \mathbf{id}$, where of course (4.46) is taken as defining **vaal** as the least fixed point. This is an example of a computable function between effectively given retracts. The LAMBDA-definable elements of $\mathbf{P}\omega$ are the computable elements in the range of **vaal**.

We have discussed the category of retracts and continuous maps, but if they are all LAMBDA-definable, then they fall within the countable model **RE**. Thus there is *another* category of effectively given retracts and effectively given continuous maps. (Examples: **tree**, **id**, **vaal**, and all those retracts and maps generated by $\oplus$, $\otimes$, and $\circ\!\!\rightarrow$.) This category seems to deserve the status of a generalized recursion theory; though this is not to say that as yet very much is known about it. In fact, the proper formulation may require an enriched category rather than a restricted one. Thus instead of confining attention to the computable retracts and computable maps, it might be better to use the full category with all maps and to single out the computable ones (also maybe the finite ones) by special predicates. In effect we have avoided any methodological decisions by working in

the universal space $\mathbf{P}\omega$ and by *defining* a notion when required—if possible with the aid of LAMBDA. This makes it possible to give all the necessary definitions and to prove the theorems without at first having to worry about axiomatic problems.

5. Closure operations and algebraic lattices.

The main point of the proof of Theorem 4.6 has already been given in the text.

Formalization. Scott's two sentences are two theorems, `theorem_4_6.Limit` and `theorem_4_6.inverse_limit`; `theorem_4_6` is their conjunction. The witnessing order isomorphism is the definition `theorem_4_6.InverseLimit`. Downstream existence for **tree**, **lamb**, and **exp** uses `theorem_4_6.Limit`.

Theorem (`theorem_4_6.Limit`). If F is Scott-continuous and sends retracts to retracts, then every iterate $F^n(\bot)$ is a retract, and so is $c = \mathbf{Y}(F)$.

Proof. Induction from $\bot$ gives the iterates. For c: identify $\mathbf{Y}(F)$ with $\operatorname{fix} F = \bigcup_n F^n(\bot)$ (Theorem 2.5); the union of a chain of retracts is a graph, and application of that graph is idempotent on the union, so $c = c \circ c$. ■

Definition (`theorem_4_6.InverseLimit`). The order isomorphism

$$\operatorname{Fix}(\operatorname{fix} F) \;\simeq_o\; \varprojlim_n \operatorname{range}(F^n(\bot))$$

under the strictness and monotonicity hypotheses, with projections $u \mapsto F^n(\bot)(u)$ and reconstruction $u = \bigcup_n v_n$.

Proof. Assemble `fixedToInverseLimit` / `inverseLimitToFixed` and the union/projection identities. ■

Theorem (`theorem_4_6.inverse_limit`). Under those same extra hypotheses, such an order isomorphism exists (the ranges are homeomorphic / lattice-isomorphic in Scott's sense).

Proof. ⟨theorem_4_6.InverseLimit⟩. ■

Theorem (`theorem_4_6`). `theorem_4_6.Limit` and `theorem_4_6.inverse_limit`.

Proof. ⟨`theorem_4_6.Limit`, `theorem_4_6.inverse_limit`⟩. ■

`theorem_4_6.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Lambda.Ycomb
public import DomainTheory.DataTypesAsLattices.Retracts.fixedToInverseLimit
public import DomainTheory.DataTypesAsLattices.Retracts.inverseLimitToFixed
public import DomainTheory.DataTypesAsLattices.Retracts.BasicInst55
import DomainTheory.DataTypesAsLattices.Retracts.funOf_fix_idem
import DomainTheory.DataTypesAsLattices.Retracts.iUnion_retract_isGraph
import DomainTheory.DataTypesAsLattices.Retracts.inverseLimit_project_iUnion
import DomainTheory.DataTypesAsLattices.Retracts.iterates_areRetracts
import DomainTheory.DataTypesAsLattices.Retracts.graphLemmas
import DomainTheory.DataTypesAsLattices.Lambda.theorem_2_5
import DomainTheory.DataTypesAsLattices.Graph.theorem_1_2

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_4_6

/-- Scott?s first sentence of Theorem 4.6: the iterates $F^n(\bot)$ and
$\mathbf{Y}(F)$ are retracts. -/
theorem Limit {F : Pomega → Pomega}
    (hf : IsScottContinuous F)
```

```
    (hret : ∀ a, Retract a → Retract (F a)) :
    (∀ n, Retract (iterateBot F n)) ∧
      Retract (funOf Ycomb (graph F)) := by
  refine ⟨iterates_areRetracts hret, ?_⟩
  have hY : funOf Ycomb (graph F) = fix F := theorem_2_5 hf
  rw [hY]
  constructor
  change fix F = graph (fun x => funOf (fix F) (funOf (fix F) x))
  have hG : IsGraph (fix F) :=
    iUnion_retract_isGraph (iterates_areRetracts hret)
  have hgr : graph (funOf (fix F)) = fix F := (theorem_1_2.iii (fix F)).mpr hG
  have hidem' : graph (fun x => funOf (fix F) (funOf (fix F) x)) =
      graph (funOf (fix F)) :=
    graph_ext (fun x => funOf_fix_idem hf hret x)
  exact (hidem'.trans hgr).symm

/-- Scott?s second sentence of Theorem 4.6: under strictness and monotonicity,
the range of $\mathbf{Y}(F)$ is order-isomorphic to the inverse limit of the
ranges of $F^n(\bot)$. -/
def InverseLimit {F : Pomega → Pomega}
    (hf : IsScottContinuous F)
    (hret : ∀ a, Retract a → Retract (F a))
    (hstrict : ∀ a, Retract a → IsStrict a → IsStrict (F a))
    (hmono : ∀ {a b}, Retract a → IsStrict a →
      Retract b → IsStrict b → retractLe a b → retractLe (F a) (F b)) :
    Fixpoints (funOf (fix F)) ≃o RetractInverseLimit F where
  toFun := fixedToInverseLimit hf hret hstrict hmono
  invFun := inverseLimitToFixed hf hret hstrict hmono
  left_inv u := by
    apply Subtype.ext
    change (⋃ n, funOf (iterateBot F n) u.1) = u.1
    rw [← funOf.iUnion, ← fix, u.property]
  right_inv v := by
    apply Subtype.ext
    funext n
    exact inverseLimit_project_iUnion hf hret hstrict hmono v n
  map_rel_iff' := by
    intro u w
    constructor
    · intro h
      change ∀ n, funOf (iterateBot F n) u.1 ⊆
        funOf (iterateBot F n) w.1 at h
      change u.1 ⊆ w.1
      have hu : u.1 = ⋃ n, funOf (iterateBot F n) u.1 := by
        calc
          u.1 = funOf (fix F) u.1 := u.property.symm
          _ = ⋃ n, funOf (iterateBot F n) u.1 := by
            change funOf (⋃ n, iterateBot F n) u.1 = _
            rw [funOf.iUnion]
      have hw : w.1 = ⋃ n, funOf (iterateBot F n) w.1 := by
        calc
          w.1 = funOf (fix F) w.1 := w.property.symm
          _ = ⋃ n, funOf (iterateBot F n) w.1 := by
            change funOf (⋃ n, iterateBot F n) w.1 = _
            rw [funOf.iUnion]
      rw [hu, hw]
```

```
      intro k hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      exact Set.mem_iUnion.mpr ⟨n, h n hkn⟩
    · intro huw
      change u.1 ⊆ w.1 at huw
      change ∀ n, funOf (iterateBot F n) u.1 ⊆
        funOf (iterateBot F n) w.1
      intro n
      exact funOf.monotone_right (iterateBot F n) huw

/-- Scott?s second sentence as a proposition: the ranges are order-isomorphic
(witnessed by `InverseLimit`). -/
theorem inverse_limit {F : Pomega → Pomega}
    (hf : IsScottContinuous F)
    (hret : ∀ a, Retract a → Retract (F a))
    (hstrict : ∀ a, Retract a → IsStrict a → IsStrict (F a))
    (hmono : ∀ {a b}, Retract a → IsStrict a →
      Retract b → IsStrict b → retractLe a b → retractLe (F a) (F b)) :
    Nonempty (Fixpoints (funOf (fix F)) ≃o RetractInverseLimit F) :=
  ⟨InverseLimit hf hret hstrict hmono⟩

end theorem_4_6

/-- Scott?s Theorem 4.6: the two sentences, as two theorems. -/
theorem theorem_4_6 {F : Pomega → Pomega}
    (hf : IsScottContinuous F)
    (hret : ∀ a, Retract a → Retract (F a))
    (hstrict : ∀ a, Retract a → IsStrict a → IsStrict (F a))
    (hmono : ∀ {a b}, Retract a → IsStrict a →
      Retract b → IsStrict b → retractLe a b → retractLe (F a) (F b)) :
    ((∀ n, Retract (iterateBot F n)) ∧
      Retract (funOf Ycomb (graph F))) ∧
      Nonempty (Fixpoints (funOf (fix F)) ≃o RetractInverseLimit F) :=
  ⟨theorem_4_6.Limit hf hret, theorem_4_6.inverse_limit hf hret hstrict hmono⟩

end DomainTheory.DataTypesAsLattices
```

2.6 Closure operations and algebraic lattices

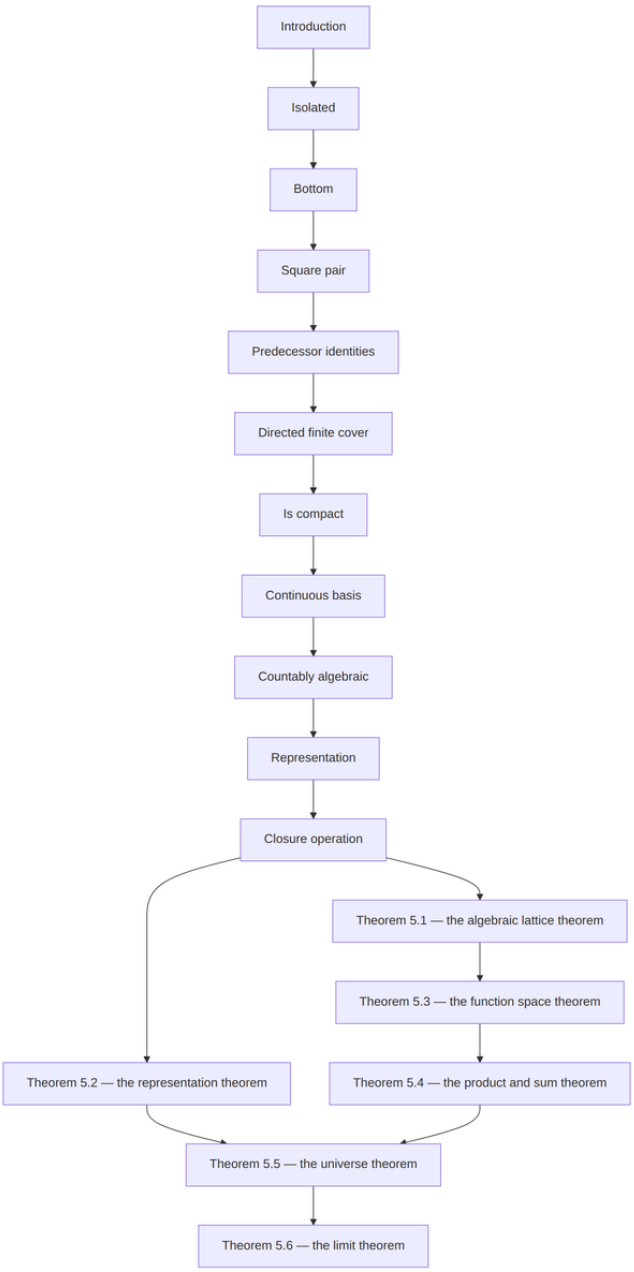

Figure 35: Closure operations and algebraic lattices.

2.6.1 Introduction ✓

Algebraic lattices and closure operations predate the paper: Grätzer (1968) for the lattices, Tarski (1930) for the closures. Per Martin-Löf and Peter Hancock suggested that the continuous closures form a universe, and the construction of $\mathbf{V}$ is essentially theirs. The limit theorem is Scott's.

Given any family of (finitary) operations on a set (say, ω) there is a closure operation defined on the subsets of that set obtained by forming the *least subset* including the given elements and *closed* under the operations. Examples are very familiar from algebra: the subgroup generated by a set of elements, the subspace spanned by a set of vectors, the convex hull of a set of geometric points. We simplify matters here by restricting attention to closures operating on sets in $\mathbf{P}\omega$, but the idea is quite general. The main point about these "algebraic" closure operations—as distinguished from topological closure operations—is that they are *continuous*. Thus, in the case of subgroups, if an element belongs to the subgroup generated by some elements, then it also belongs to the subgroup generated by *finitely* many of them. In the context of $\mathbf{P}\omega$ we can state the characteristic condition very simply.

2.6.2 Isolated ✓

Isolated elements of $\mathbf{P}\omega$ are the finite (compact) basis sets e_n.

Formalization.

Definition (`Isolated`). An element $x \in \mathbf{P}\omega$ is isolated when $x = e_n$ for some $n \in \omega$.

Proof. The class packages that existential; `e` is the standard finite-set coding on $\mathbf{P}\omega$. ■

`Isolated.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

class Isolated (x : Pomega) : Prop where
  out : ∃ n, x = e n

end DomainTheory.DataTypesAsLattices
```

2.6.3 Bottom ✓

Elementary identities for $\bot$ in $\mathbf{P}\omega$: it is distinct from $\top$, every nonempty set meets some element, and unions with $\bot$ are trivial.

Theorem (`botElem.ne_top`). $\top \neq \bot$ in $\mathbf{P}\omega$.

Proof. Otherwise $0 \in \bot$; but $\bot$ is empty. ■

Theorem (`botElem.exists_mem`). If $x \neq \bot$, then some natural number belongs to x.

Proof. Contrapositively, a set with no members is $\bot$. ■

Theorem (`botElem.union_empty`). $x \cup \bot = x$.

Proof. Union with the empty set does not change x. ■

Theorem (`botElem.empty_union`). $\bot \cup x = x$.

Proof. The empty set is a unit for union on the left as well. ■

Theorem (`botElem.ne_ofNat_zero`). $\bot \neq 0$ in $\mathbf{P}\omega$.

Proof. Otherwise $0 \in \bot$; but $\bot$ is empty. ■

`botElem.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.Pomega
public import DomainTheory.DataTypesAsLattices.Lambda.Language
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace botElem

theorem ne_top : (topElem : Pomega) = botElem := by
  intro h
  have h0 : (0 : ℕ) ∈ (botElem : Pomega) := h ▸ Set.mem_univ 0
  simp [botElem] at h0

theorem ne_ofNat_zero : botElem = ofNat 0 := by
  intro h
  have : (0 : ℕ) ∈ botElem := by rw [h]; simp [ofNat]
  exact (mem_botElem 0).mp this

theorem exists_mem {x : Pomega} (h : x = botElem) : ∃ m, m ∈ x := by
  by_contra hc
  refine h ?_
  ext n
  simp only [mem_botElem, iff_false]
  exact fun hn => hc ⟨n, hn⟩

theorem union_empty (x : Pomega) : x ∪ botElem = x := Set.union_empty x

theorem empty_union (x : Pomega) : botElem ∪ x = x := Set.empty_union x

end botElem

end DomainTheory.DataTypesAsLattices
```

2.6.4 Square pair ✓

The square pairing $x \square y$ interlaces the elements of x and y by parity of codes.

Definition (`squarePair`). For $x, y \subseteq \omega$,

$$x \square y \;=\; \{2n \mid n \in x\} \;\cup\; \{2m+1 \mid m \in y\}.$$

Proof. Evens carry the first component and odds the second; every code has a unique parity, so the two halves do not interfere. ■

squarePair.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.Pomega
public import Mathlib.Tactic.ToAdditive
@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
def squarePair (x y : Pomega) : Pomega :=
  {k | (∃ n ∈ x, k = 2 * n) ∨ (∃ m ∈ y, k = 2 * m + 1)}

end DomainTheory.DataTypesAsLattices
```

2.6.5 Predecessor identities ✓

Predecessor identities used when shifting codes: $\mathrm{pred}(\mathrm{succ}\, x) = x$ and pred preserves unions.

Formalization. Library facts live under `predSet` in `Lambda/predSet_more.lean`.

Theorem (`predSet.isScottContinuous`). The map $x \mapsto \mathrm{predSet}(x)$ is Scott-continuous on $\mathbf{P}\omega$.

Proof. Membership of k in $\mathrm{predSet}(x)$ is witnessed by a finite e-approximation (namely $e_{2^{k+1}}$), so the Scott-union characterization applies both ways. ■

Theorem (`predSet.ofNat_succ`). $\mathrm{predSet}(j+1) = j$ as numerals.

Proof. Unfold `ofNat` and `predSet`; the predecessor of the singleton $\{j+1\}$ is $\{j\}$. ■

Theorem (`predSet.succSet`). $\mathrm{predSet}(\mathrm{succSet}\, x) = x$.

Proof. Elements of $\mathrm{succSet}\, x$ are successors of members of x; injectivity of succ recovers x, and conversely every $k \in x$ contributes $k+1$. ■

Theorem (`predSet.union`). $\mathrm{predSet}(x \cup y) = \mathrm{predSet}(x) \cup \mathrm{predSet}(y)$.

Proof. Unfold `predSet`; predecessor distributes over union of sets of naturals. ■

`predSet_more.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
public import DomainTheory.DataTypesAsLattices.Lambda.Language
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace predSet

theorem isScottContinuous : IsScottContinuous predSet := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
    refine mem_scottUnion.mpr ⟨2 ^ (k + 1), ?_, ?_⟩
    · simpa [e.pow2, Set.singleton_subset_iff, predSet] using hk
    · simp [predSet, e.pow2]
  · intro hk
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp hk
    exact hm hkm

theorem ofNat_succ (j : ℕ) : predSet (ofNat (j + 1)) = ofNat j := by
  ext k
  simp [predSet, ofNat]
```

```
theorem succSet (x : Pomega) : predSet (succSet x) = x := by
  ext k
  constructor
  · intro ⟨n, hn, heq⟩
    exact (Nat.succ_injective heq) ▸ hn
  · intro hk
    exact ⟨k, hk, rfl⟩

theorem union (x y : Pomega) :
    predSet (x ∪ y) = predSet x ∪ predSet y := by
  ext k; simp [predSet]

end predSet

end DomainTheory.DataTypesAsLattices
```

2.6.6 Directed finite cover ✓

A finite subset of the union of a directed family of fixpoints is covered by a single member of the family.

Theorem (`directed_finite_cover_subset`). Let A be a directed set of fixed points of a continuous map on $\mathbf{P}\omega$. If a finite $t \subseteq \omega$ is contained in the union of the members of A, then some single $z \in A$ already contains t.

Proof. Directedness of A as fixed points is the same as directedness of the underlying sets, so the ordinary finite-cover lemma for directed families applies. ■

`directed_finite_cover_subset.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.DirectedSubset
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem directed_finite_cover_subset {f : Pomega → Pomega}
    {A : Set (Fixpoints f)} (hA : DirectedSubset A) {t : Pomega}
    (ht : t.Finite) (hsub : t ⊆ ⋃₀ (Subtype.val '' A)) :
    ∃ z ∈ A, t ⊆ z := by
  have hA' : DirectedSet A := by
    refine ⟨⟨hA.out.1, ?_⟩⟩
    intro x hx y hy
    obtain ⟨z, hz, hxz, hyz⟩ := hA.out.2 hx hy
    exact ⟨z, hz, hxz, hyz⟩
  simpa [Fixpoints.vals] using directed_finite_cover hA' ht (by
    simpa [Fixpoints.vals] using hsub)

end DomainTheory.DataTypesAsLattices
```

2.6.7 Is compact ✓

An element of a complete lattice is compact when it is way-below itself.

Definition (`IsCompact`). In a complete lattice, x is compact when $x \ll x$: whenever a directed set has supremum at least x, some single member of the set already lies above x.

Proof. Compactness is the diagonal case of the way-below relation. ■

`IsCompact.lean`

```
module

public import DomainTheory.DataTypesAsLattices.FixedLattices.WayBelow

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def IsCompact {α : Type u} [CompleteLattice α] (x : α) : Prop :=
  WayBelow x x

end DomainTheory.DataTypesAsLattices
```

2.6.8 Continuous basis ✓

A continuous basis assigns to each element a directed family of way-below approximants whose supremum recovers the element.

Definition (`ContinuousBasis`). A map sending each x in a complete lattice to a set $\mathrm{basis}(x)$ is a continuous basis when, for every x: - $\mathrm{basis}(x)$ is directed, - every $y \in \mathrm{basis}(x)$ satisfies $y \ll x$, and - $x = \bigsqcup \mathrm{basis}(x)$.

Proof. These three clauses are the definition of a continuous basis. ■

`ContinuousBasis.lean`

```
module

public import DomainTheory.DataTypesAsLattices.FixedLattices.WayBelow

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

class ContinuousBasis {α : Type u} [CompleteLattice α]
    (basis : α → Set α) : Prop where
  out : ∀ x, @DirectedSet α completeLatticePreorder (basis x) ∧
    (∀ y ∈ basis x, WayBelow y x) ∧
    x = @sSup α completeLatticeSupSet (basis x)

end DomainTheory.DataTypesAsLattices
```

2.6.9 Countably algebraic ✓

A complete lattice is countably algebraic when its compact elements admit a countable enumeration that is dense: every element is the supremum of the compacts below it. Finite-support approximations along that enumeration are directed and recover the same supremum.

Definition (`CountablyAlgebraic`). A complete lattice is countably algebraic when there is an enumeration $n \mapsto c_n$ of compact elements such that every compact equals some c_n, and every x is the supremum of $\{c_n \mid c_n \le x\}$.

Proof. Compactness of each c_n, completeness of the enumeration, and density are the three data of the structure. ■

Definition (`finiteBasisSups`). Given a sequence d and a set x of indices, the finite-basis supremums are the elements $\bigsqcup\{d_n \mid n \in t\}$ for finite $t \subseteq x$.

Proof. Each such supremum is determined by a finite support inside x. ■

Theorem (`finiteBasisSups.sSup_eq`). The supremum of all finite-basis supremums of d along x equals $\bigsqcup\{d_n \mid n \in x\}$.

Proof. Every finite sub-supremum is below the full image supremum; conversely each singleton support is one of the finite-basis supremums. ■

Theorem (`finiteBasisSups.directed`). The set of finite-basis supremums of d along x is directed.

Proof. The empty support supplies a bottom; the union of two finite supports supplies an upper bound. ■

Theorem (`CountablyAlgebraic.compact_finite_support`). If $c_m \le \bigsqcup\{c_n \mid n \in x\}$ in a countably algebraic lattice, then finitely many indices from x already suffice.

Proof. Compactness of c_m against the directed family of finite-basis supremums yields a finite support; the preceding supremum identity rewrites that as a finite sub-image of the enumeration. ■

`CountablyAlgebraic.lean`

```
module

public import DomainTheory.DataTypesAsLattices.FixedLattices.IsCompact

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

structure CountablyAlgebraic (α : Type u) [CompleteLattice α] where
  compact : ℕ → α
  compact_isCompact : ∀ n, IsCompact (compact n)
  compact_complete : ∀ x, IsCompact x → ∃ n, x = compact n
  density : ∀ x, x = @sSup α completeLatticeSupSet
    {k : α | IsCompact k ∧ @LE.le α completeLatticeLE k x}

end DomainTheory.DataTypesAsLattices
```

`finiteBasisSups.lean`

```
module

public import Mathlib.Order.CompleteLattice.Defs
public import Mathlib.Data.Finset.Basic
public import DomainTheory.DataTypesAsLattices.FixedLattices.CountablyAlgebraic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
def finiteBasisSups {α : Type u} [CompleteLattice α]
    (d : ℕ → α) (x : Set ℕ) : Set α :=
  {y | ∃ t : Finset ℕ, (t : Set ℕ) ⊆ x ∧
    y = sSup (d '' (t : Set ℕ))}

namespace finiteBasisSups

theorem sSup_eq {α : Type u} [CompleteLattice α]
    (d : ℕ → α) (x : Set ℕ) :
    sSup (finiteBasisSups d x) = sSup (d '' x) := by
  apply le_antisymm
  · apply sSup_le
    rintro y ⟨t, htx, rfl⟩
    apply sSup_le
    intro q hq
    exact le_sSup (Set.image_mono htx hq)
  · apply sSup_le
    rintro _ ⟨n, hn, rfl⟩
    calc
      d n ≤ sSup (d '' (({n} : Finset ℕ) : Set ℕ)) :=
        le_sSup ⟨n, by simp, rfl⟩
      _ ≤ sSup (finiteBasisSups d x) :=
        le_sSup ⟨{n}, by simpa, rfl⟩

theorem directed {α : Type u} [CompleteLattice α]
    (d : ℕ → α) (x : Set ℕ) :
    DirectedSet (finiteBasisSups d x) := by
  constructor
  constructor
  · exact ⟨sSup (d '' ((∅ : Finset ℕ) : Set ℕ)), ∅, by simp, rfl⟩
  · rintro y ⟨t, htx, rfl⟩ z ⟨u, hux, rfl⟩
    refine ⟨sSup (d '' ((t ∪ u : Finset ℕ) : Set ℕ)),
      ⟨t ∪ u, ?_, rfl⟩, ?_, ?_⟩
    · intro n hn
      simp only [Finset.coe_union, Set.mem_union] at hn
      exact hn.elim (fun h => htx h) (fun h => hux h)
    · apply sSup_le
      intro q hq
      apply le_sSup
      exact Set.image_mono (by
        intro n hn
        exact by simp [hn]) hq
    · apply sSup_le
      intro q hq
      apply le_sSup
      exact Set.image_mono (by
        intro n hn
        exact by simp [hn]) hq

end finiteBasisSups

end DomainTheory.DataTypesAsLattices
```

CountablyAlgebraic_more.lean

```
module

public import Mathlib.Order.CompleteLattice.Defs
public import Mathlib.Data.Finset.Basic
public import DomainTheory.DataTypesAsLattices.FixedLattices.CountablyAlgebraic
public import DomainTheory.DataTypesAsLattices.FixedLattices.finiteBasisSups

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace CountablyAlgebraic

theorem compact_finite_support
    {α : Type u} [CompleteLattice α] (D : CountablyAlgebraic α)
    {m : ℕ} {x : Set ℕ}
    (h : D.compact m ≤ sSup (D.compact '' x)) :
    ∃ t : Finset ℕ, (t : Set ℕ) ⊆ x ∧
      D.compact m ≤ sSup (D.compact '' (t : Set ℕ)) := by
  have h' : D.compact m ≤ sSup (finiteBasisSups D.compact x) := by
    rwa [finiteBasisSups.sSup_eq]
  obtain ⟨y, ⟨t, htx, rfl⟩, hmy⟩ :=
    D.compact_isCompact m (finiteBasisSups D.compact x)
      (finiteBasisSups.directed D.compact x) h'
  exact ⟨t, htx, hmy⟩

end CountablyAlgebraic

end DomainTheory.DataTypesAsLattices
```

2.6.10 Representation ✓

The representation of a countably algebraic lattice in $\mathbf{P}\omega$: encode by the set of compact indices below an element, and decode by the supremum of those compacts.

Definition (`representationEncode`). Given a countably algebraic lattice with compact enumeration c_n, the code of an element x is $\{n \in \omega \mid c_n \leq x\}$.

Proof. Membership of an index records that the corresponding compact lies below x. ■

Definition (`representationDecode`). The decode of a set $u \subseteq \omega$ is $\bigsqcup\{c_n \mid n \in u\}$.

Proof. The image of the codes under the enumeration, taken as a supremum. ■

Theorem (`representationDecode.encode`). Decoding the code of x recovers x.

Proof. Every compact below x appears in the code, so density says x is their supremum; conversely each selected compact is already $\leq x$. ■

`representation.lean`

```
module

public import DomainTheory.DataTypesAsLattices.FixedLattices.CountablyAlgebraic
public import DomainTheory.DataTypesAsLattices.Pomega.Pomega

@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
def representationEncode {α : Type u} [CompleteLattice α]
    (D : CountablyAlgebraic α) (x : α) : Pomega :=
  {n | D.compact n ≤ x}

def representationDecode {α : Type u} [CompleteLattice α]
    (D : CountablyAlgebraic α) (x : Pomega) : α :=
  sSup (D.compact '' x)

namespace representationDecode

theorem encode
    {α : Type u} [CompleteLattice α] (D : CountablyAlgebraic α) (x : α) :
    representationDecode D (representationEncode D x) = x := by
  apply le_antisymm
  · apply sSup_le
    rintro _ ⟨n, hn, rfl⟩
    exact hn
  · calc
      x = sSup {k : α | IsCompact k ∧ k ≤ x} := D.density x
      _ ≤ representationDecode D (representationEncode D x) := by
        apply sSup_le
        rintro k ⟨hkc, hkx⟩
        obtain ⟨n, rfl⟩ := D.compact_complete k hkc
        exact le_sSup ⟨n, hkx, rfl⟩

end representationDecode

end DomainTheory.DataTypesAsLattices
```

2.6.11 Closure operation ✓

DEFINITION. An element $a \in \mathbf{P}\omega$ is called a *closure operation* iff it satisfies:

$$\mathbf{I} \subseteq a = a \circ a.$$

We see by definition that a closure operation is not only continuous, but it is also a retract. This is reasonable since the closure of the closure of a subset must be equal to the closure. To say of a function that $\mathbf{I} \subseteq a$ means that $x \subseteq a(x)$ for all $x \in \mathbf{P}\omega$. In other words, every set is contained in its closure. (Note that closures are opposite to the "projections", those retracts where $a \subseteq \mathbf{I}$.) Among examples of closure operations we find $\mathbf{I}$ and $\mathbf{T}$; the first has the most closed sets (fixed points). The second has the least. (Note that $\mathbf{T} = \omega$ always is a fixed point of a closure operation; $\mathbf{T} = \lambda x.\, \mathbf{T}$ is thus the most trivial closure operation.) The examples **fun**, **open**, and **int** of § 4 are all closure operations (cf. (4.1), (4.6), (4.7)). We remarked that **fun** is a retract, but the reader should prove in addition:

$$(5.1) \quad u \subseteq \lambda x.\, u(x),$$

for all $u \in \mathbf{P}\omega$ (cf. Theorem 1.2). We note that this fact can be rewritten in the language of retracts as:

$$(5.2) \quad \mathbf{I} \subseteq \mathbf{I} \circ \to \mathbf{I},$$

the significance of which will emerge after we develop a bit of the theory of closure operations.

Unfortunately the natural definition of the retract **bool** does not yield a closure operation. In this section we adopt this modification:

$$(5.3) \quad \mathbf{boool} = \lambda u.\, u \supset 0,\, \mathbf{T} + 1.$$

The closed sets of **boool** are $\bot$, 0, $\mathbf{T} + 1$, and $\mathbf{T}$. Note that with any closure operation a, the function value $a(x)$ is the least closed set (fixed point of a) including as a subset the given set x. Thus given any family $\mathcal{C} \subseteq \mathbf{P}\omega$ of "closed" sets which is closed under the intersection of subfamilies, if we define

$$(5.4) \quad a(x) = \bigcap \{y \in \mathcal{C} \mid x \subseteq y\},$$

then this will be a closure operation *provided* it is continuous. This remark makes it easy to check that certain functions are closure operations if we can spot easily the family $\mathcal{C}$ of fixed points.

Alas, the "natural" definition of ordered pairs (cf. (2.21)) leads to projections rather than closures. Here we must choose another:

$$(5.5) \quad [x, y] = \{2n \mid n \in x\} \cup \{2m + 1 \mid m \in y\},$$

with these inverse functions:

$$(5.6) \quad [u]_0 = \{n \mid 2n \in u\},$$

$$(5.7) \quad [u]_1 = \{m \mid 2m + 1 \in u\}.$$

We shall find that the main advantage of these equations lies in the obvious equation:

$$(5.8) \quad u = [[u]_0, [u]_1],$$

which is not true for the other pairing functions. Of course we have:

$$(5.9) \quad [[x, y]]_0 = x,$$

$$(5.10) \quad [[x, y]]_1 = y.$$

We shall not extend the idea of these new functions to triples and sequences, though it is clear what to do.

Abstractly, an *algebraic lattice* is a complete lattice in which the isolated points are dense. An *isolated* (sometimes called: *compact*) point in a lattice is one that is not the limit (sup or l.u.b.) of any directed family of its proper subelements. This definition works in continuous lattices, but more generally it is better to say that if the isolated point is *contained in* a sup, then it is also contained in a finite subsup (a sup of a finite selection of elements out of the given sup). In the case of the lattice of subgroups of a group, the isolated ones are the finitely generated subgroups. The isolated points of $\mathbf{P}\omega$ are the finite sets e_n. To say that isolated points are *dense* means that every element in the lattice is the sup of the isolated points it contains. The sequel to Theorem 4.1 for closure operations relates them to algebraic lattices.

Definition (`Closure`). An element $a \in \mathbf{P}\omega$ is a closure operation when $\mathbf{I} \subseteq a$ and a is a retract ($a = a \circ a$).

Proof. Expansiveness $\mathbf{I} \subseteq a$ is $x \subseteq a(x)$ for all x; idempotence is the retract equation. Together these are Scott's display $\mathbf{I} \subseteq a = a \circ a$. ■

Closure.lean

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.Icomb
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

class Closure (a : Pomega) : Prop where
  out : Icomb ⊆ a ∧ Retract a

end DomainTheory.DataTypesAsLattices
```

2.6.12 Theorem 5.1 — the algebraic lattice theorem ✓

THEOREM 5.1 (The algebraic lattice theorem). *The fixed points of any closure operation form an algebraic lattice.*

Theorem (`theorem_5_1`). The fixed points of any closure operation form an algebraic lattice: their compact elements are the $a(e_n)$, and every fixed point is the directed supremum of the compact fixed points below it.

Proof. A fixed point is compact among the fixed points precisely when it is some $a(e_n)$; the $a(e_n)$ below a given fixed point are directed and recover it as their union. ■

theorem_5_1.lean

```
module

public import DomainTheory.DataTypesAsLattices.Closures.closureCompact
public import DomainTheory.DataTypesAsLattices.Closures.compactFixedBelow
import DomainTheory.DataTypesAsLattices.Closures.compact_fixed_iff
import DomainTheory.DataTypesAsLattices.Closures.compactFixedBelow_more
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_5_1 {a : Pomega} (ha : Closure a) :
    (∀ x : Fixpoints (funOf a),
      IsCompactSubset x ↔ ∃ n, x = closureCompact a ha n) ∧
    ∀ x : Fixpoints (funOf a),
      DirectedSubset (compactFixedBelow a x) ∧
        (x : Pomega) = ⋃₀ (Subtype.val '' compactFixedBelow a x) :=
  ⟨compact_fixed_iff.subset ha, fun x =>
    ⟨compactFixedBelow.directedSubset ha x, compactFixedBelow.sUnion ha x⟩⟩

end DomainTheory.DataTypesAsLattices
```

2.6.13 Theorem 5.2 — the representation theorem ✓

The proof is very easy if one notes that the isolated points of $\{x \mid x = a(x)\}$, where a is a closure operation, are exactly the images $a(e_n)$ of the finite sets in $\mathbf{P}\omega$. What makes Theorem 5.1 more interesting is the converse.

THEOREM 5.2 (The representation theorem for algebraic lattices). *Every algebraic lattice with a countable number of isolated points is isomorphic to the range of some closure operation.*

By Theorem 1.6 we know that the algebraic lattice is a retract, but a more direct argument makes the closure property clear. Thus, let D be the algebraic lattice with $\{d_n \mid n \in \omega\}$ as the set of all isolated points with the indicated enumeration. We shall use the square notation with symbols $\sqsubseteq$ and $\sqcup$ for the lattice ordering and sup. The desired closure operation is defined by:

$$a(x) = \{m \mid d_m \sqsubseteq \sqcup\{d_n \mid n \in x\}\}.$$

It is an easy exercise to show that from the definition of "isolated" it follows that a is continuous; and from density, it follows that D is in a one-to-one order preserving correspondence with the fixed points of a.

In the last section we introduced an algebra of retracts, much of which carries over to closure operations given the proper definitions. Without any change we can use Theorem 4.3 on function spaces, provided we check that the required retracts are closures.

Theorem (`theorem_5_2`). Every countably algebraic lattice is order-isomorphic to the fixed points of a closure operation on $\mathbf{P}\omega$: the representing map is Scott-continuous, yields a closure, and induces a bijective order correspondence with that closure's fixed points.

Proof. Continuity of the representing map, that it is a closure, and the order isomorphism onto the fixed points. ■

theorem_5_2.lean

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.Fixpoints
public import DomainTheory.DataTypesAsLattices.Closures.representClosureCode
import DomainTheory.DataTypesAsLattices.Closures.representationOrderIso
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_5_2 {α : Type u} [CompleteLattice α]
    (D : CountablyAlgebraic α) :
    IsScottContinuous (representClosure D) ∧
      Closure (representClosureCode D) ∧
      ∃ φ : α → Fixpoints (funOf (representClosureCode D)),
        Function.Bijective φ ∧
          ∀ x y, x ≤ y ↔ (φ x : Pomega) ⊆ φ y :=
  ⟨representClosure.isScottContinuous D,
    representClosureCode.isClosure D,
    ⟨fun x => representationOrderIso D x,
      (representationOrderIso D).toEquiv.bijective,
      fun x y => by
        constructor
        · intro hxy
          exact (representationOrderIso D).map_rel_iff.mpr hxy
        · intro hsub
          exact (representationOrderIso D).map_rel_iff.mp hsub⟩⟩

end DomainTheory.DataTypesAsLattices
```

2.6.14 Theorem 5.3 — the function space theorem ✓

THEOREM 5.3 (The function space theorem for algebraic lattices). *Suppose that a and b are closure operations; then so is $a\circ \to b$.*

The proof comes down to showing that

$$(5.11)\quad u(x) \sqsubseteq b(u(a(x))),$$

whenever a and b are closure operations. But this is easy by monotonicity. Note that (5.1) is needed.

For those interested in topology, one can give a construction of the isolated points of the function space which is much more direct than just taking the functions $b \circ e_n \circ a$, which on the face of it do not tell us too much. But we shall not need this explicit construction here.

The reason for changing the pairing functions is to be able to form products and sums of closure operations. In the case of products, the analogue of $\otimes$ is straightforward:

$$(5.12)\quad a \boxtimes b = \lambda u.\, [a([u]_0), b([u]_1)];$$

while for sums using $a' = \lambda x.\, 0 \cup a(x-1) + 1$ and similarly for b' we write:

$$(5.13)\quad a \boxplus b = \lambda u.\, ([u]_0 \supset 0,\, 0) \cup ([u]_1 \supset 1,\, 1) \sqsupset [a'([u]_0), \bot],\, [\bot, b'([u]_1)].$$

We can then establish with the aid of (5.8)–(5.10):

Theorem (`theorem_5_3`). If a and b are closure operations, then $a\circ \to b$ is a retract.

Proof. Theorem 4.3(i) already gives idempotence of the function-space retract when a and b are retracts; closures are retracts. ■

Theorem (`theorem_5_3.closure`). If a and b are closure operations, then so is $a\circ \to b$.

Proof. Expansiveness $\mathbf{I} \subseteq a\circ \to b$ together with the preceding retract fact. ■

`theorem_5_3.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.arrowR
public import DomainTheory.DataTypesAsLattices.Closures.Closure
import DomainTheory.DataTypesAsLattices.Closures.Icomb_subset_arrowR
import DomainTheory.DataTypesAsLattices.Retracts.theorem_4_3_more
import DomainTheory.DataTypesAsLattices.Retracts.graphLemmas
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_5_3 {a b : Pomega} (ha : Closure a) (hb : Closure b) :
    Retract (arrowR a b) := by
  constructor
  change arrowR a b = graph (fun x => funOf (arrowR a b) (funOf (arrowR a b) x))
  apply graph_ext
  intro u
  rw [theorem_4_3.i ha.out.2 hb.out.2, arrowR.app]

namespace theorem_5_3

theorem closure {a b : Pomega} (ha : Closure a) (hb : Closure b) :
    Closure (arrowR a b) :=
```

```
  ⟨⟨Icomb_subset_arrowR ha hb, theorem_5_3 ha hb⟩⟩

end theorem_5_3

end DomainTheory.DataTypesAsLattices
```

2.6.15 Theorem 5.4 — the product and sum theorem ✓

THEOREM 5.4 (The product and sum theorem for algebraic lattices). *Suppose that a and b are closure operations; then so are $a \boxtimes b$ and $a \boxplus b$. Analogues of the results in Theorems 4.4 and 4.5 carry over.*

Following the discussion in § 4, we can also show that the closure operations form a Cartesian closed category, which in some ways is better than the category of all retracts. What makes it better is the existence of a "universe".

Every continuous operation generates a closure operation by just closing up the sets under the continuous function (as a set operation). We can institutionalize this thought by means of this definition:

$$(5.14) \quad \mathbf{V} = \lambda a \lambda x.\, \mathbf{Y}(\lambda y.\, x \cup a(y)).$$

Clearly $\mathbf{V}$ is LAMBDA-definable, continuous, etc. A more understandable characterization would define $\mathbf{V}(a)(x)$ by this equation:

$$(5.15) \quad \mathbf{V}(a)(x) = \bigcap \{y \mid x \sqsubseteq y \text{ and } a(y) \sqsubseteq y\}.$$

These two definitions are easily seen to be equivalent. What is unexpected is the discovery (due in a different form to Peter Hancock and Per Martin-Löf) that $\mathbf{V}$ itself is a closure operation.

theorem_5_4.lean

```
module

public import DomainTheory.DataTypesAsLattices.Closures.boxTensor
public import DomainTheory.DataTypesAsLattices.Closures.boxPlus
import DomainTheory.DataTypesAsLattices.Closures.Icomb_subset_boxPlus
import DomainTheory.DataTypesAsLattices.Closures.Icomb_subset_boxTensor

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_5_4

theorem times {a b : Pomega} (ha : Closure a) (hb : Closure b) :
    Closure (boxTensor a b) :=
  ⟨⟨Icomb_subset_boxTensor ha hb, boxTensor.isRetract ha.out.2 hb.out.2⟩⟩

theorem plus {a b : Pomega} (ha : Closure a) (hb : Closure b) :
    Closure (boxPlus a b) :=
  ⟨⟨Icomb_subset_boxPlus ha hb, boxPlus.isRetract ha.out.2 hb.out.2⟩⟩

end theorem_5_4

theorem theorem_5_4 {a b : Pomega} (ha : Closure a) (hb : Closure b) :
```

```
    Closure (boxTensor a b) ∧ Closure (boxPlus a b) :=
  ⟨theorem_5_4.times ha hb, theorem_5_4.plus ha hb⟩

end DomainTheory.DataTypesAsLattices
```

2.6.16 Theorem 5.5 — the universe theorem ✓

THEOREM 5.5 (The universe theorem for algebraic lattices). *The function* $\mathbf{V}$ *is a closure operation and its fixed points comprise the set of all closure operations.*

Thus to say a is a closure operation, write $a : \mathbf{V}$. To have a mapping on closure operations, write $f : \mathbf{V}\circ \to \mathbf{V}$. Remark that 5.5 allows us to write $\mathbf{V} : \mathbf{V}$. It all seems rather circular, but it is quite consistent. The category of separate algebraic lattices "contains itself"—if we are careful to work through retracts of $\mathbf{P}\omega$.

The proof of Theorem 5.5 requires a few steps. We note first that for all $x, a \in \mathbf{P}\omega$:

$$(5.16) \quad x \subseteq \mathbf{V}(a)(x),$$

Let $y = \mathbf{V}(a)(x)$. This is the least y with $x \cup a(y) \subseteq y$. What is the least z with $y \cup a(z) \subseteq z$? The answer is of course y, which proves:

$$(5.17) \quad \mathbf{V}(a)(\mathbf{V}(a)(x)) = \mathbf{V}(a)(x),$$

Thus $\mathbf{V}(a)$ is always a closure operation. If a is already a closure operation, then clearly $\mathbf{V}(a)(x) = a(x)$. Therefore we have shown:

$$(5.18) \quad a = \mathbf{V}(a) \quad \text{iff} \quad a \text{ is a closure operation.}$$

But then by (5.16) and (5.17) we have by (5.18):

$$(5.19) \quad \mathbf{V}(a) = \mathbf{V}(\mathbf{V}(a)).$$

From (5.16) by monotonicity we see:

$$(5.20) \quad a(x) \subseteq a(\mathbf{V}(a)(x)) \subseteq \mathbf{V}(a)(x).$$

Hence by (5.1) we can derive:

$$(5.21) \quad a \subseteq \lambda x.\, a(x) \subseteq \lambda x.\, \mathbf{V}(a)(x) = \mathbf{V}(a).$$

From (5.19) and (5.21) it follows that $\mathbf{V}$ itself is a closure operation.

The operation $\mathbf{V}$ forms the least closure operation containing a given element, and it shows that the lattice of closure operations is not only a retract of $\mathbf{P}\omega$ but also an algebraic lattice. Since we can now use $\mathbf{V}$ as a retract, the earlier results become formulas:

$$(5.22) \quad (\lambda a : \mathbf{V}.\, \lambda b : \mathbf{V}.\, a \boxtimes b) : \mathbf{V}\circ \to (\mathbf{V}\circ \to \mathbf{V});$$

$$(5.23) \quad (\lambda a : \mathbf{V}.\, \lambda b : \mathbf{V}.\, a \boxplus b) : \mathbf{V}\circ \to (\mathbf{V}\circ \to \mathbf{V});$$

we can also state such functorial properties as:

$$(5.24)\quad (\lambda a : \mathbf{V}.\, \lambda b : \mathbf{V}.\, a\circ \to b) : \mathbf{V}\circ \to (\mathbf{V}\circ \to \mathbf{V}).$$

Using this style of notation we have:

Theorem (`theorem_5_5`). If a is a closure operation, then $\mathbf{V}(a)(x) = a(x)$ for every x, and $\mathbf{V}(a)$ is idempotent: $\mathbf{V}(a)(\mathbf{V}(a)(x)) = \mathbf{V}(a)(x)$.

Proof. The equality with $a(x)$ is (5.18) at a closure; the idempotence is (5.17). ■

theorem_5_5.lean

```
module

public import DomainTheory.DataTypesAsLattices.Closures.Closure
public import DomainTheory.DataTypesAsLattices.Closures.Vapply
import DomainTheory.DataTypesAsLattices.Closures.eq_5_18
import DomainTheory.DataTypesAsLattices.Closures.eq_5_17

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_5_5 {a : Pomega} (ha : Closure a) (x : Pomega) :
    Vapply a x = funOf a x ∧ Vapply a (Vapply a x) = Vapply a x :=
  ⟨eq_5_18.eq ha x, eq_5_17 a x⟩

end DomainTheory.DataTypesAsLattices
```

2.6.17 Theorem 5.6 — the limit theorem ✓

THEOREM 5.6 (The limit theorem for algebraic lattices).

$$(\lambda f : \mathbf{V}\circ \to \mathbf{V}.\, \mathbf{Y}(f)) : (\mathbf{V}\circ \to \mathbf{V})\circ \to \mathbf{V}.$$

In words: if f is a mapping on closure operations, then its least fixed point is also a closure operation. The proof of course holds with any retract in place of $\mathbf{V}$, but we are more interested in applications to $\mathbf{V}$. For example, note that $\mathbf{V}(\bot) = \mathbf{I}$. Now let $f = \lambda a : \mathbf{V}.\, a\circ \to a$. The least fixed point of this f is the limit of the sequence:

$$\bot,\ \mathbf{I},\ \mathbf{I}\circ \to \mathbf{I},\ (\mathbf{I}\circ \to \mathbf{I})\circ \to (\mathbf{I}\circ \to \mathbf{I}),\ ((\mathbf{I}\circ \to \mathbf{I})\circ \to (\mathbf{I}\circ \to \mathbf{I}))\circ \to ((\mathbf{I}\circ \to \mathbf{I})\circ \to (\mathbf{I}\circ \to \mathbf{I})),\ \ldots$$

and we see that all these retracts are *strict*. This means $\mathbf{Y}(f)$ is nontrivial in that it has at least *two* fixed points (viz., $\bot$ and $\top$). But $d = \mathbf{Y}(f)$ must be the least closure operation satisfying

$$(5.25)\quad d = d\circ \to d,$$

and we have thus proved that there are *nontrivial* algebraic lattices isomorphic to their own function spaces. This construction (which rests on hardly more than (5.2), since we could take $d = \mathbf{Y}(\lambda a.\, \mathbf{I} \cup (a\circ \to a))$) is much quicker than the inverse limit construction originally found by the author to give λ-calculus models satisfying (η). There are many other fixed points of (5.25) besides this least closure operation, but their connection with inverse limits is not fully investigated.

We note in conclusion that most constructions by fixed points give algebraic lattices (like **lamb** in § 4), and so we could just as well do them in $\mathbf{V}$ if we remember to use $\boxtimes$ and $\boxplus$. The one-point space is $\top$ (*not* **nil**), and so the connection with inverse limits via Theorem 4.6 is not as clear when nonstrict functions are used. For many purposes, this may not make any difference.

theorem_5_6.lean

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.arrowR
public import DomainTheory.DataTypesAsLattices.Lambda.Ycomb
public import DomainTheory.DataTypesAsLattices.Closures.Vcomb
import DomainTheory.DataTypesAsLattices.Closures.Vcomb_more
import DomainTheory.DataTypesAsLattices.Retracts.retract_app
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_5_6 {f : Pomega} (hf : typed f (arrowR Vcomb Vcomb)) :
    typed (funOf Ycomb f) Vcomb := by
  set y := funOf Ycomb f
  have hy : y = funOf f y := Ycomb.unfold f
  have hf' : ∀ x, funOf f x = funOf Vcomb (funOf f (funOf Vcomb x)) := by
    intro x
    simpa [comp.app] using congrArg (fun w => funOf w x) (arrowR.typed_of hf)
  have hyV : y = funOf Vcomb (funOf f (funOf Vcomb y)) :=
    hy.trans (hf' y)
  have h1 : funOf Vcomb y = funOf Vcomb (funOf f y) :=
    congrArg (funOf Vcomb) hy
  have h2 : funOf Vcomb (funOf f y) =
      funOf Vcomb (funOf Vcomb (funOf f (funOf Vcomb y))) :=
    congrArg (funOf Vcomb) (hf' y)
  have h3 : funOf Vcomb (funOf Vcomb (funOf f (funOf Vcomb y))) =
      funOf Vcomb (funOf f (funOf Vcomb y)) :=
    retract_app Vcomb.isRetract _
  exact (h1.trans (h2.trans (h3.trans hyV.symm))).symm

end DomainTheory.DataTypesAsLattices
```

2.7 Subsets and their classification

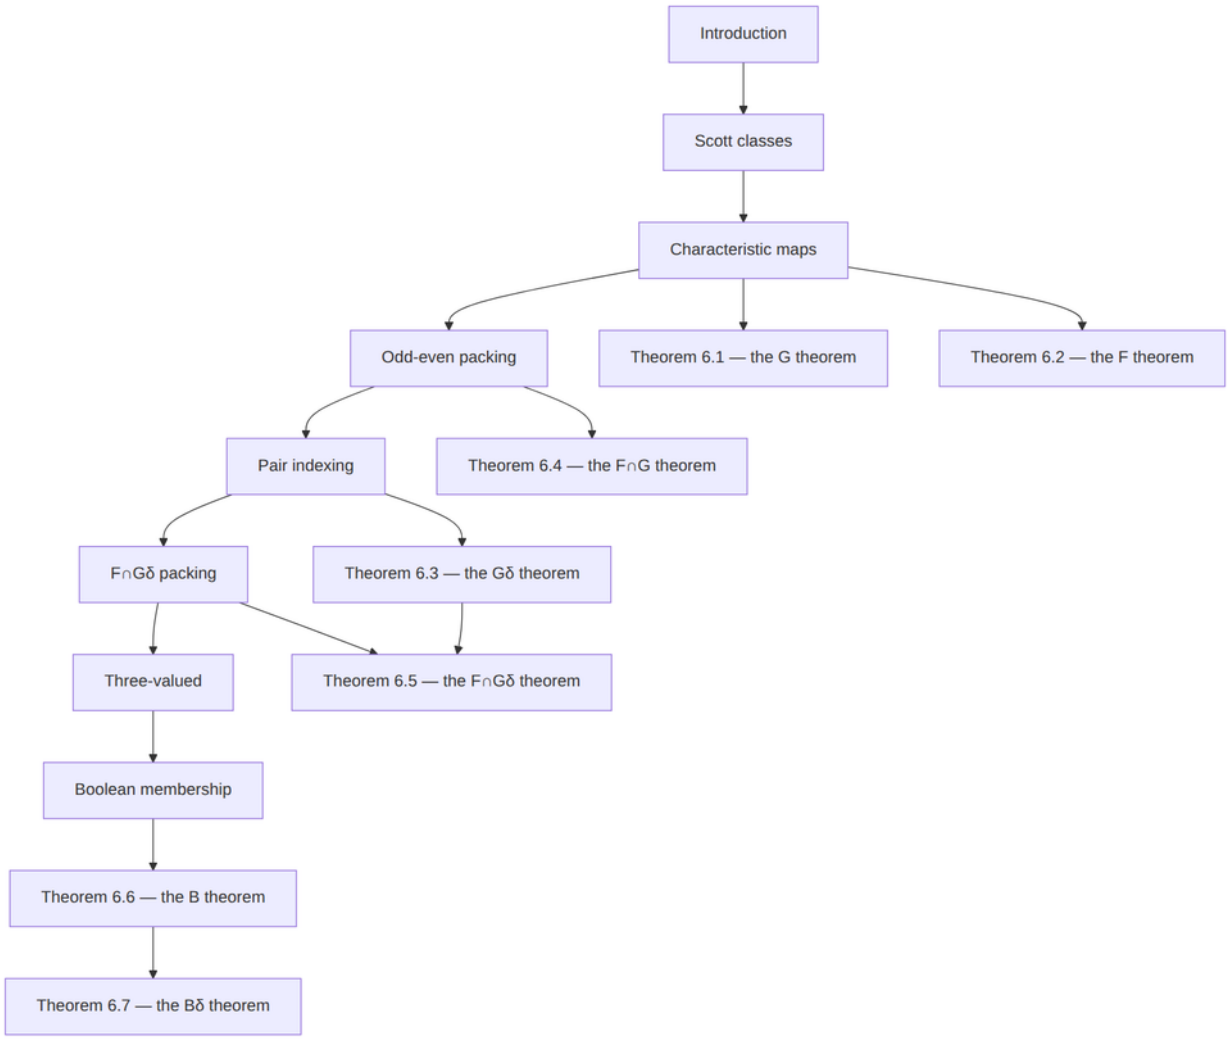

Figure 36: Subsets and their classification.

2.7.1 Introduction ✓

Retracts produce very special subsets of $\mathbf{P}\omega$: a retract always has a nonempty range which forms a lattice under $\sqsubseteq$. For example, the range of **int** is $\{\bot, \top\} \cup \omega$. We often wish to eliminate $\bot$ and $\top$; and with a retract like **tree** the situation is more complex, since combinations like $\langle 1, \langle\langle 1, \langle \bot, \langle 0\rangle\rangle\rangle, \top\rangle\rangle$ might require elimination. In these two cases the method is simple.

Historical note. The classification of these subsets by notions from descriptive set theory, and the connection with Wadge reducibility, are in the work of Adrian Tang. The normal forms for the classes, such as Table 3, are Scott's.

Consider these two functions:

$$(6.1) \quad \mathbf{mid} = \lambda x : \mathbf{int}.\, x \supset 0, 0$$

$$(6.2) \quad \mathbf{perf} = \lambda u : \mathbf{tree}.\, \mathbf{which}(u) \supset 0,\, \Delta(\mathbf{perf}(\mathbf{fst}(\mathbf{out}(u))))(\mathbf{perf}(\mathbf{snd}(\mathbf{out}(u))))$$

where Δ is a special combinator:

$$(6.3) \quad \Delta = \lambda x \lambda y.\, (x \supset (y \supset 0, \top), \top) \cup (y \supset (x \supset 0, \top), \top).$$

We find that $\omega = \{x : \mathbf{int} \mid \mathbf{mid}(x) = 0\}$. In the case of trees, note first this behavior of Δ:

Δ	$\bot$	0	$\top$
$\bot$	$\bot$	$\bot$	$\top$
0	$\bot$	0	$\top$
$\top$	$\top$	$\top$	$\top$

The question is: what subset is $\{u : \mathbf{tree} \mid \mathbf{perf}(u) = 0\}$?
Now **perf** is defined recursively. We can see that

$$\mathbf{perf}(\bot) = \bot, \quad \mathbf{perf}(\top) = \top, \quad \mathbf{perf}(\langle 0 \rangle) = 0,$$

and

$$\mathbf{perf}(\langle 1, \langle x, y \rangle \rangle) = \Delta(\mathbf{perf}(x))(\mathbf{perf}(y))$$

when $x, y : \mathbf{tree}$. Every tree, aside from $\top$ or $\bot$, is either *atomic* or a pair of trees. The atomic tree is "perfect" (that is, $\mathbf{perf}(\langle 0 \rangle) = 0$). A finite tree which does not

contain $\bot$ or $\top$ is perfect—as we can see inductively using the table above for Δ. An infinite tree is never perfect: either some branch ends in $\top$ and **perf** maps it to $\top$, or $\top$ is never reached and **perf** maps it to $\bot$. Thus the subset in question is then seen to be the set of *finite* trees generated from the atom by pairing. This is clearly a desirable subset, and it is sorted out by a function with a simple recursive definition. The general question is: what subsets can be characterized by equations? The answer can be given by reference to the topology of $\mathbf{P}\omega$.

2.7.2 Scott classes ✓

DEFINITION. Let $\mathfrak{G}$ be the class of open subsets of $\mathbf{P}\omega$, and $\mathfrak{F}$ be the class of closed subsets. Further let $\mathfrak{B}$ be the class of all (finite) Boolean combinations of open sets.

We recall from § 1 that $U \in \mathfrak{G}$ just in case for all $x \in \mathbf{P}\omega$, we have $x \in U$ if and only if some finite subset of x is in U. The class of open sets contains $\varnothing$ and $\mathbf{P}\omega$ and is closed under finite intersection and arbitrary union; in fact, it can be generated by these two closure conditions from subsets of the special form $\{x \in \mathbf{P}\omega \mid n \in x\}$ for the various $n \in \omega$. An open set is always *monotonic* (whenever $x \in U$ and $x \subseteq y$, then $y \in U$), so that every nonempty $U \in \mathfrak{G}$ has $\top \in U$.

Another characterization of openness can be given by continuous functions. Suppose $U \in \mathfrak{G}$. Define $f : \mathbf{P}\omega \to \{\bot, \top\}$ so that

$$U = \{x \mid f(x) = \top\};$$

then f is continuous. Conversely, if such an f is continuous, then U is open. But if we do not assume the range of f is included in $\{\bot, \top\}$, this is not true. For the case of general functions we know that f is continuous if and only if $\{x \mid f(x) \in V\}$ is open for all open V. This defines continuity in terms of openness, but we can turn it the other way around:

Definition (`ScottF`). $\mathfrak{F}$ is the class of closed subsets of $\mathbf{P}\omega$: those U whose complement is Scott-open.

Definition (`IsScottGdelta`). U is a $\mathfrak{G}_\delta$ when it is a countable intersection of Scott-open sets.

Definition (`IsFcapG`). U belongs to $\mathfrak{F}\dot{\cap}\mathfrak{G}$ when $U = C \cap O$ for some closed C and Scott-open O.

Definition (`IsFcapGdelta`). U belongs to $\mathfrak{F}\dot{\cap}\mathfrak{G}_\delta$ when $U = C \cap G$ for some closed C and $\mathfrak{G}_\delta$ set G.

Definition (`IsBooleanOpen`). The Boolean combinations of Scott-open sets are generated inductively by taking opens, binary unions, binary intersections, and complements.

Definition (`ScottB`). $\mathfrak{B}$ is the class of sets satisfying $\mathrm{IsBooleanOpen}$.

Definition (`IsBdelta`). U is a $\mathfrak{B}_\delta$ when it is a countable intersection of Boolean combinations of opens.

Theorem (`IsBooleanOpen.of_closed`). Every closed set is Boolean.

Proof. The complement of a closed set is open, hence Boolean, and Boolean sets are closed under complement. ■

Theorem (`IsBooleanOpen.of_fcapG`). Every set in $\mathfrak{F}\dot{\cap}\mathfrak{G}$ is Boolean.

Proof. Intersect a closed (hence Boolean) set with an open. ■

Theorem (`IsBooleanOpen.sUnion_finite`). A finite union of Boolean sets is Boolean.

Proof. By induction on the finite family: the empty union is the empty open set, and binary union closes the inductive step. ■

`Classes.lean`

```
module

public import Mathlib.Order.CompleteLattice.Defs
public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import Mathlib.Data.Set.Finite.Powerset

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

def ScottF : Set (Set Pomega) := {U | IsScottOpen U?}

def IsFcapG (U : Set Pomega) : Prop :=
  ∃ C O, IsScottOpen C? ∧ IsScottOpen O ∧ U = C ∩ O

def IsScottGdelta (U : Set Pomega) : Prop :=
  ∃ Us : ℕ → Set Pomega, (∀ n, IsScottOpen (Us n)) ∧ U = ⋂ n, Us n
```

```
def IsFcapGdelta (U : Set Pomega) : Prop :=
  ∃ C G, IsScottOpen C? ∧ IsScottGdelta G ∧ U = C ∩ G

inductive IsBooleanOpen : Set Pomega → Prop
  | ofOpen {U} : IsScottOpen U → IsBooleanOpen U
  | union {U V} : IsBooleanOpen U → IsBooleanOpen V → IsBooleanOpen (U ∪ V)
  | inter {U V} : IsBooleanOpen U → IsBooleanOpen V → IsBooleanOpen (U ∩ V)
  | compl {U} : IsBooleanOpen U → IsBooleanOpen U?

namespace IsBooleanOpen

theorem of_closed {U : Set Pomega} (hU : IsScottOpen U?) :
    IsBooleanOpen U := by
  have h := (IsBooleanOpen.ofOpen hU).compl
  rwa [compl_compl] at h

theorem of_fcapG {U : Set Pomega} (hU : IsFcapG U) : IsBooleanOpen U := by
  obtain ⟨C, O, hC, hO, rfl⟩ := hU
  exact (of_closed hC).inter (IsBooleanOpen.ofOpen hO)

theorem sUnion_finite {S : Set (Set Pomega)}
    (hS : S.Finite) (hU : ∀ U ∈ S, IsBooleanOpen U) :
    IsBooleanOpen (⋃₀ S) := by
  revert hU
  induction S, hS using Set.Finite.induction_on with
  | empty =>
    intro
    simp
    exact IsBooleanOpen.ofOpen IsScottOpen.empty
  | insert ha hs ih =>
    intro hUV
    rename_i a s
    simp [Set.sUnion_insert]
    exact (hUV a (Set.mem_insert a s)).union
      (ih fun u hu => hUV u (Set.mem_insert_of_mem a hu))

end IsBooleanOpen

def ScottB : Set (Set Pomega) := {U | IsBooleanOpen U}

def IsBdelta (U : Set Pomega) : Prop :=
  ∃ Bs : ℕ → Set Pomega, (∀ n, IsBooleanOpen (Bs n)) ∧ U = ⋂ n, Bs n

end DomainTheory.DataTypesAsLattices
```

2.7.3 Characteristic maps ✓

Characteristic maps detect membership in Scott-open or closed sets by continuous equations with the numerals 0, $\bot$, and $\top$.

Definition (`charOpen`). $\mathrm{charOpen}\, U\, x = \{k \mid k = 0 \wedge \exists n.\, e_n \subseteq x \wedge e_n \in U\}$.

Definition (`charTop`). $\mathrm{charTop}\, U\, x = \{k \mid \exists n.\, e_n \subseteq x \wedge e_n \in U\}$.

Definition (`closedToZero`). $\mathrm{closedToZero}\, C\, x = 0 \cup \mathrm{charTop}\, C^{\mathrm{c}}\, x$.

Theorem (`charOpen.isScottContinuous`). For every U, the map $x \mapsto \mathrm{charOpen}\, U\, x$ is Scott-continuous.

Proof. Membership of a coordinate at x is witnessed by a finite $e_n \subseteq x$ and reassembles under Scott unions. ■

Theorem (`charOpen.eq_zero`). If U is Scott-open, then $\mathrm{charOpen}\, U\, x = 0$ if and only if $x \in U$.

Proof. A witness $e_n \subseteq x$ in U and upward closure put x in U; conversely Scott-open membership supplies such a witness, forcing the value to equal the numeral 0. ■

Theorem (`charOpen.threeValued`). Every value of $\mathrm{charOpen}\, U$ is three-valued (in fact $\bot$ or 0).

Proof. Either 0 belongs to the value, which forces equality with the numeral 0, or the value is empty. ■

Theorem (`charTop.isScottContinuous`). For every U, the map $x \mapsto \mathrm{charTop}\, U\, x$ is Scott-continuous.

Proof. Finite witnesses of membership assemble under Scott unions, as for $\mathrm{charOpen}$. ■

Theorem (`charTop.eq_top`). If U is Scott-open, then $\mathrm{charTop}\, U\, x = \top$ if and only if $x \in U$.

Proof. Membership of 0 in a top value yields a finite witness in U; conversely Scott-openness supplies a witness for every coordinate of $\top$. ■

Theorem (`charTop.eq_bot`). If U is Scott-open, then $\mathrm{charTop}\, U\, x = \bot$ if and only if $x \notin U$.

Proof. Compare with the previous equivalence and the emptiness of $\bot$. ■

Theorem (`charTop.eq_bot_of_closed`). If C^{c} is Scott-open, then $\mathrm{charTop}\, C^{\mathrm{c}}\, x = \bot$ if and only if $x \in C$.

Proof. Apply the previous equivalence to the complement. ■

Theorem (`closedToZero.isScottContinuous`). For every C, the map $x \mapsto \mathrm{closedToZero}\, C\, x$ is Scott-continuous.

Proof. It is the pointwise union of a constant numeral with $\mathrm{charTop}\, C^{\mathrm{c}}$, and binary union is Scott-continuous in each argument separately. ■

Theorem (`closedToZero.threeValued`). If C^{c} is Scott-open, every value of $\mathrm{closedToZero}\, C$ is three-valued.

Proof. On C the characteristic of the complement is $\bot$, so the union equals 0; off C it is $\top$, so the union equals $\top$. ■

Theorem (`closedToZero.eq_zero`). If C^{c} is Scott-open, then $\mathrm{closedToZero}\, C\, x = 0$ if and only if $x \in C$.

Proof. Off C the value is $\top$, distinct from 0; on C it collapses to 0. ■

`CharacteristicMaps.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Classification.ThreeValued
import DomainTheory.DataTypesAsLattices.Closures.union_left_isScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_3
import DomainTheory.DataTypesAsLattices.Lambda.const_isScottContinuous
import DomainTheory.DataTypesAsLattices.Lambda.ofNat_more

@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
open TopologicalSpace

def charOpen (U : Set Pomega) (x : Pomega) : Pomega :=
  {k | k = 0 ∧ ∃ n, e n ⊆ x ∧ e n ∈ U}

namespace charOpen

theorem isScottContinuous (U : Set Pomega) :
    IsScottContinuous (charOpen U) := by
  constructor
  intro x
  ext k
  constructor
  · intro ⟨hk0, n, hn, hne⟩
    exact mem_scottUnion.mpr ⟨n, hn, hk0, n, subset_rfl, hne⟩
  · intro hk
    obtain ⟨m, hm, hk0, n, hn, hne⟩ := mem_scottUnion.mp hk
    exact ⟨hk0, n, subset_trans hn hm, hne⟩

theorem eq_zero {U : Set Pomega} (hU : IsScottOpen U) (x : Pomega) :
    charOpen U x = ofNat 0 ↔ x ∈ U := by
  constructor
  · intro h
    have : 0 ∈ charOpen U x := by rw [h]; simp [ofNat]
    obtain ⟨_, n, hn, hne⟩ := this
    exact isScottOpen_isUpper hU hne hn
  · intro hx
    ext k
    constructor
    · intro ⟨hk0, _⟩; simp [ofNat, hk0]
    · intro hk
      simp [ofNat] at hk
      subst hk
      obtain ⟨n, hn, hne⟩ := (IsScottOpen.mem_iff hU).mp hx
      exact ⟨rfl, n, hn, hne⟩

theorem threeValued (U : Set Pomega) (x : Pomega) :
    ThreeValued (charOpen U x) := by
  constructor
  by_cases h : 0 ∈ charOpen U x
  · refine Or.inr (Or.inl ?_)
    ext k
    constructor
    · intro ⟨hk0, _⟩; simp [ofNat, hk0]
    · intro hk; simp [ofNat] at hk; subst hk; exact h
  · refine Or.inl ?_
    ext k
    constructor
    · intro hk
      obtain ⟨rfl, n, hn, hne⟩ := hk
      exact h ⟨rfl, n, hn, hne⟩
    · intro hk
      exact ((mem_botElem k).mp hk).elim

end charOpen
```

```
def charTop (U : Set Pomega) (x : Pomega) : Pomega :=
  {_k | ∃ n, e n ⊆ x ∧ e n ∈ U}

namespace charTop

theorem isScottContinuous (U : Set Pomega) :
    IsScottContinuous (charTop U) := by
  constructor
  intro x
  ext k
  constructor
  · intro ⟨n, hn, hne⟩
    exact mem_scottUnion.mpr ⟨n, hn, n, subset_rfl, hne⟩
  · intro hk
    obtain ⟨m, hm, n, hn, hne⟩ := mem_scottUnion.mp hk
    exact ⟨n, subset_trans hn hm, hne⟩

theorem eq_top {U : Set Pomega} (hU : IsScottOpen U) (x : Pomega) :
    charTop U x = topElem ↔ x ∈ U := by
  constructor
  · intro h
    have : 0 ∈ charTop U x := by rw [h]; exact Set.mem_univ 0
    obtain ⟨n, hn, hne⟩ := this
    exact isScottOpen_isUpper hU hne hn
  · intro hx
    ext k
    constructor
    · intro _; trivial
    · intro _
      exact (IsScottOpen.mem_iff hU).mp hx

theorem eq_bot {U : Set Pomega} (hU : IsScottOpen U) (x : Pomega) :
    charTop U x = botElem ↔ x ∈ U := by
  constructor
  · intro h hx
    have : charTop U x = topElem := (eq_top hU x).mpr hx
    rw [h] at this
    have : (0 : ℕ) ∈ (botElem : Pomega) := by
      rw [this]; exact Set.mem_univ 0
    exact (mem_botElem 0).mp this
  · intro hx
    ext k
    constructor
    · intro ⟨n, hn, hne⟩
      exact hx (isScottOpen_isUpper hU hne hn)
    · intro hk
      exact ((mem_botElem k).mp hk).elim

theorem eq_bot_of_closed {C : Set Pomega} (hC : IsScottOpen C?) (x : Pomega) :
    charTop C? x = botElem ↔ x ∈ C := by
  rw [eq_bot hC]
  simp

end charTop

def closedToZero (C : Set Pomega) (x : Pomega) : Pomega :=
```

```
  ofNat 0 ∪ charTop C? x

namespace closedToZero

theorem isScottContinuous (C : Set Pomega) :
    IsScottContinuous (closedToZero C) :=
  theorem_1_3.tuple (f := fun a b => (a ∪ b : Pomega))
    union_left_isScottContinuous
    (fun x => by
      convert union_left_isScottContinuous x using 1
      funext y; exact (Set.union_comm y x).symm)
    (const_isScottContinuous (ofNat 0)) (charTop.isScottContinuous C?)

theorem threeValued {C : Set Pomega} (hC : IsScottOpen C?) (x : Pomega) :
    ThreeValued (closedToZero C x) := by
  constructor
  by_cases hx : x ∈ C
  · refine Or.inr (Or.inl ?_)
    have : charTop C? x = botElem := (charTop.eq_bot_of_closed hC x).mpr hx
    ext k
    simp [closedToZero, this, ofNat, botElem]
  · refine Or.inr (Or.inr ?_)
    have : charTop C? x = topElem := (charTop.eq_top hC x).mpr hx
    ext k
    simp [closedToZero, this, ofNat, topElem]

theorem eq_zero {C : Set Pomega} (hC : IsScottOpen C?) (x : Pomega) :
    closedToZero C x = ofNat 0 ↔ x ∈ C := by
  constructor
  · intro h
    by_contra hx
    have htop : charTop C? x = topElem := (charTop.eq_top hC x).mpr hx
    have : closedToZero C x = topElem := by
      ext k
      simp [closedToZero, htop]
    exact topElem.ne_ofNat_zero (this.symm.trans h)
  · intro hx
    have : charTop C? x = botElem := (charTop.eq_bot_of_closed hC x).mpr hx
    ext k
    simp [closedToZero, this, ofNat, botElem]

end closedToZero

end DomainTheory.DataTypesAsLattices
```

2.7.4 Odd-even packing ✓

Odd–even packing interlaces two maps on the odd and even numerals and recovers each factor by parity projection.

Definition (`oddPart`). $\mathrm{oddPart}\, y = \{n \mid 2n+1 \in y\}$.

Definition (`evenPart`). $\mathrm{evenPart}\, y = \{n \mid 2n \in y\}$.

Definition (`oddEvenPack`).

$$(\mathrm{oddEvenPack}\, f\, g)\, x = \{k \mid (\exists n.\, k = 2n+1 \wedge n \in f(x)) \vee (\exists n.\, k = 2n \wedge n \in g(x))\}.$$

Theorem (`oddEvenPack.eq_zero`). $\mathrm{oddEvenPack}\, f\, g\, x = 0$ if and only if $f(x) = \bot$ and $g(x) = 0$.

Proof. An odd packed index forces $f(x)$ empty; an even packed index forces $g(x)$ to be the singleton $\{0\}$; the converse packs those values back to the numeral 0. ■

Theorem (`oddEvenPack.isScottContinuous`). If f and g are Scott-continuous, so is $\mathrm{oddEvenPack}\, f\, g$.

Proof. Each parity clause pulls a Scott-union witness from f or g and pushes it forward; monotonicity of f and g closes the converse. ■

Theorem (`oddEvenPack.evenPart`). $\mathrm{evenPart}(\mathrm{oddEvenPack}\, f\, g\, x) = g(x)$.

Proof. Even indices unpack exactly the members of $g(x)$; odd indices cannot contribute. ■

Theorem (`oddEvenPack.oddPart`). $\mathrm{oddPart}(\mathrm{oddEvenPack}\, f\, g\, x) = f(x)$.

Proof. Symmetric to the even case. ■

Theorem (`oddEvenPack.subset`). If $f(x) \subseteq \{m \mid m < N\}$ and $g(x) \subseteq \{m \mid m < M\}$, then $\mathrm{oddEvenPack}\, f\, g\, x \subseteq \{k \mid k < 2\max(N, M) + 1\}$.

Proof. An odd or even packed index is strictly less than twice the corresponding bound, plus one on the odd side. ■

OddEvenPack.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
public import DomainTheory.DataTypesAsLattices.Lambda.Language
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

def oddPart (y : Pomega) : Pomega := {n | 2 * n + 1 ∈ y}

def evenPart (y : Pomega) : Pomega := {n | 2 * n ∈ y}

def oddEvenPack (f g : Pomega → Pomega) (x : Pomega) : Pomega :=
  {k | (∃ n, k = 2 * n + 1 ∧ n ∈ f x) ∨ (∃ n, k = 2 * n ∧ n ∈ g x)}

namespace oddEvenPack

theorem eq_zero {f g : Pomega → Pomega} (x : Pomega) :
    oddEvenPack f g x = ofNat 0 ↔ f x = botElem ∧ g x = ofNat 0 := by
  constructor
  · intro h
    constructor
    · ext n
      constructor
      · intro hn
        have : 2 * n + 1 ∈ oddEvenPack f g x := Or.inl ⟨n, rfl, hn⟩
        rw [h] at this
        simp [ofNat] at this
      · intro hn
        exact ((mem_botElem n).mp hn).elim
```

```
    · ext n
      constructor
      · intro hn
        have hmem : 2 * n ∈ oddEvenPack f g x := Or.inr ⟨n, rfl, hn⟩
        rw [h] at hmem
        have : 2 * n = 0 := by simpa [ofNat] using hmem
        have hn0 : n = 0 := by
          have := Nat.mul_eq_zero.mp this
          exact this.resolve_left (by decide)
        simpa [ofNat] using hn0
      · intro hn
        simp [ofNat] at hn
        subst hn
        have : (0 : ℕ) ∈ oddEvenPack f g x := by rw [h]; simp [ofNat]
        rcases this with ⟨n, hk, _⟩ | ⟨n, hk, hn⟩
        · omega
        · have : n = 0 := by omega
          simpa [this] using hn
  · intro ⟨hf, hg⟩
    ext k
    constructor
    · intro hk
      rcases hk with ⟨n, hk, hn⟩ | ⟨n, hk, hn⟩
      · rw [hf] at hn; exact ((mem_botElem n).mp hn).elim
      · rw [hg] at hn; simp [ofNat] at hn; simp [ofNat, hk, hn]
    · intro hk
      simp [ofNat] at hk
      subst hk
      refine Or.inr ⟨0, rfl, ?_⟩
      rw [hg]; simp [ofNat]

theorem isScottContinuous {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (oddEvenPack f g) := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
    rcases hk with ⟨n, hk, hn⟩ | ⟨n, hk, hn⟩
    · have : n ∈ scottUnion f x := by rw [← hf.out x]; exact hn
      obtain ⟨p, hp, hnp⟩ := mem_scottUnion.mp this
      exact mem_scottUnion.mpr ⟨p, hp, Or.inl ⟨n, hk, hnp⟩⟩
    · have : n ∈ scottUnion g x := by rw [← hg.out x]; exact hn
      obtain ⟨p, hp, hnp⟩ := mem_scottUnion.mp this
      exact mem_scottUnion.mpr ⟨p, hp, Or.inr ⟨n, hk, hnp⟩⟩
  · intro hk
    obtain ⟨p, hp, h⟩ := mem_scottUnion.mp hk
    rcases h with ⟨n, hk, hn⟩ | ⟨n, hk, hn⟩
    · exact Or.inl ⟨n, hk, IsScottContinuous.monotone hf hp hn⟩
    · exact Or.inr ⟨n, hk, IsScottContinuous.monotone hg hp hn⟩

theorem evenPart (f g : Pomega → Pomega) (x : Pomega) :
    evenPart (oddEvenPack f g x) = g x := by
  ext n
  constructor
```

```
  · intro hn
    rcases hn with ⟨k, hk, hkn⟩ | ⟨k, hk, hkn⟩
    · have : 2 * n = 2 * k + 1 := hk
      omega
    · have : k = n := by
        have : 2 * n = 2 * k := hk
        omega
      simpa [this] using hkn
  · intro hn
    exact Or.inr ⟨n, rfl, hn⟩

theorem oddPart (f g : Pomega → Pomega) (x : Pomega) :
    oddPart (oddEvenPack f g x) = f x := by
  ext n
  constructor
  · intro hn
    rcases hn with ⟨k, hk, hkn⟩ | ⟨k, hk, hkn⟩
    · have : k = n := by
        have : 2 * n + 1 = 2 * k + 1 := hk
        omega
      simpa [this] using hkn
    · have : 2 * n + 1 = 2 * k := hk
      omega
  · intro hn
    exact Or.inl ⟨n, rfl, hn⟩

theorem subset {f g : Pomega → Pomega} {x : Pomega} {N M : ℕ}
    (hf : f x ⊆ {m | m < N}) (hg : g x ⊆ {m | m < M}) :
    oddEvenPack f g x ⊆ {k | k < 2 * Nat.max N M + 1} := by
  intro k hk
  rcases hk with ⟨n, rfl, hn⟩ | ⟨n, rfl, hn⟩
  · have hnN : n < N := hf hn
    have : n < Nat.max N M := lt_of_lt_of_le hnN (Nat.le_max_left _ _)
    exact Nat.succ_lt_succ (Nat.mul_lt_mul_of_pos_left this (by decide : 0 < 2))
  · have hnM : n < M := hg hn
    have hlt : n < Nat.max N M := lt_of_lt_of_le hnM (Nat.le_max_right _ _)
    have : 2 * n < 2 * Nat.max N M + 1 :=
      Nat.lt_succ_of_le (Nat.mul_le_mul_left 2 (Nat.le_of_lt hlt))
    exact this

end oddEvenPack

end DomainTheory.DataTypesAsLattices
```

2.7.5 Pair indexing ✓

Pair indexing packs a sequence of maps into one map via Cantor pairing of fibre indices with values.

Definition (`pairIndexed`).

$$(\mathrm{pairIndexed}\, f_s)\, x = \{k \mid \exists n\, m.\, k = \langle n, m\rangle \wedge m \in f_s(n)(x)\}.$$

Theorem (`pairIndexed.eq_top`). $\mathrm{pairIndexed}\, f_s\, x = \top$ if and only if every $f_s(n)(x)$ equals $\top$.

Proof. Every pair code belongs to the packed value precisely when each fibre is universal; surjectivity of pairing recovers the fibres. ■

Theorem (`pairIndexed.isScottContinuous`). If each $f_s(n)$ is Scott-continuous, so is pairIndexed f_s.

Proof. Membership of a pair code pulls a Scott-union witness from the corresponding fibre and reassembles under the packed Scott union; monotonicity of each fibre closes the converse. ■

pairIndexed.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
public import DomainTheory.DataTypesAsLattices.Pomega.pair
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

def pairIndexed (fs : ℕ → Pomega → Pomega) (x : Pomega) : Pomega :=
  {k | ∃ n m, k = pair n m ∧ m ∈ fs n x}

namespace pairIndexed

theorem eq_top (fs : ℕ → Pomega → Pomega) (x : Pomega) :
    pairIndexed fs x = topElem ↔ ∀ n, fs n x = topElem := by
  constructor
  · intro h n
    ext m
    constructor
    · intro _; trivial
    · intro _
      have : pair n m ∈ pairIndexed fs x := by rw [h]; exact Set.mem_univ _
      obtain ⟨n', m', heq, hm⟩ := this
      obtain ⟨rfl, rfl⟩ := pair_inj heq
      exact hm
  · intro h
    ext k
    constructor
    · intro _; trivial
    · intro _
      obtain ⟨n, m, hk⟩ := exists_pair k
      exact ⟨n, m, hk.symm, by rw [h n]; exact Set.mem_univ m⟩

theorem isScottContinuous (fs : ℕ → Pomega → Pomega)
    (hfs : ∀ n, IsScottContinuous (fs n)) :
    IsScottContinuous (pairIndexed fs) := by
  constructor
  intro x
  ext k
  constructor
  · intro ⟨n, m, hk, hm⟩
    have : m ∈ scottUnion (fs n) x := by rw [← (hfs n).out x]; exact hm
    obtain ⟨p, hp, hmp⟩ := mem_scottUnion.mp this
    exact mem_scottUnion.mpr ⟨p, hp, n, m, hk, hmp⟩
  · intro hk
```

```
    obtain ⟨p, hp, n, m, hk, hm⟩ := mem_scottUnion.mp hk
    exact ⟨n, m, hk, IsScottContinuous.monotone (hfs n) hp hm⟩

end pairIndexed

end DomainTheory.DataTypesAsLattices
```

2.7.6 F∩Gδ packing ✓

The $\mathfrak{F}\dot{\cap}\mathfrak{G}_\delta$ packing combines a map that detects a closed fibre with one that detects a $\mathfrak{G}_\delta$ fibre, encoding the closed side at 0 and the open sequence on positive numerals.

Definition (`fcapGdeltaPack`).

$$(\mathrm{fcapGdeltaPack}\, f\, g)\, x = \{k \mid (k = 0 \wedge 0 \in f(x)) \vee (\exists n.\, k = n + 1 \wedge n \in g(x))\}.$$

Theorem (`fcapGdeltaPack.isScottContinuous`). If f and g are Scott-continuous, so is $\mathrm{fcapGdeltaPack}\, f\, g$.

Proof. The clause $0 \in f(x)$ and each clause $n \in g(x)$ pull Scott-union witnesses from f or g; monotonicity of f and g closes the converse. ■

Theorem (`fcapGdeltaPack.eq`). Suppose $f(x)$ is $\bot$ or $\top$. Then $\mathrm{fcapGdeltaPack}\, f\, g\, x = \mathrm{succSet}\, \top$ if and only if $f(x) = \bot$ and $g(x) = \top$.

Proof. The successor of $\top$ never contains 0, so a packed value equal to $\mathrm{succSet}\, \top$ forces $0 \notin f(x)$, hence $f(x) = \bot$ under the two-point hypothesis, while positive packed indices force $g(x) = \top$. Conversely, with $f(x) = \bot$ and $g(x) = \top$ the packed value is exactly the positive numerals. ■

`fcapGdeltaPack.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
public import DomainTheory.DataTypesAsLattices.Lambda.Language
import DomainTheory.DataTypesAsLattices.Classification.ThreeValued
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

def fcapGdeltaPack (f g : Pomega → Pomega) (x : Pomega) : Pomega :=
  {k | (k = 0 ∧ 0 ∈ f x) ∨ ∃ n, k = n + 1 ∧ n ∈ g x}

namespace fcapGdeltaPack

theorem isScottContinuous {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (fcapGdeltaPack f g) := by
  constructor
  intro x
  ext k
```

```
  constructor
  · intro hk
    rcases hk with ⟨hk0, h0⟩ | ⟨n, hk, hn⟩
    · have : 0 ∈ scottUnion f x := by rw [← hf.out x]; exact h0
      obtain ⟨p, hp, hp0⟩ := mem_scottUnion.mp this
      exact mem_scottUnion.mpr ⟨p, hp, Or.inl ⟨hk0, hp0⟩⟩
    · have : n ∈ scottUnion g x := by rw [← hg.out x]; exact hn
      obtain ⟨p, hp, hnp⟩ := mem_scottUnion.mp this
      exact mem_scottUnion.mpr ⟨p, hp, Or.inr ⟨n, hk, hnp⟩⟩
  · intro hk
    obtain ⟨p, hp, h⟩ := mem_scottUnion.mp hk
    rcases h with ⟨hk0, h0⟩ | ⟨n, hk, hn⟩
    · exact Or.inl ⟨hk0, IsScottContinuous.monotone hf hp h0⟩
    · exact Or.inr ⟨n, hk, IsScottContinuous.monotone hg hp hn⟩

theorem eq {f g : Pomega → Pomega} {x : Pomega}
    (hfval : f x = botElem ∨ f x = topElem) :
    fcapGdeltaPack f g x = succSet topElem ↔ f x = botElem ∧ g x = topElem := by
  constructor
  · intro h
    constructor
    · have h0 : 0 ∈ fcapGdeltaPack f g x := by
        rw [h]; exact zero_not_mem_succSet_top
      have : 0 ∈ f x := fun hf0 => h0 (Or.inl ⟨rfl, hf0⟩)
      rcases hfval with hf | hf
      · exact hf
      · exact (this (by rw [hf]; exact Set.mem_univ 0)).elim
    · ext n
      constructor
      · intro _; trivial
      · intro _
        have : n + 1 ∈ fcapGdeltaPack f g x := by
          rw [h]; exact ⟨n, Set.mem_univ n, rfl⟩
        rcases this with ⟨hk0, _⟩ | ⟨m, hm, hmn⟩
        · exact (Nat.succ_ne_zero n (by simp [hk0])).elim
        · exact Nat.succ_injective hm ▸ hmn
  · intro ⟨hf, hg⟩
    ext k
    constructor
    · intro hk
      rcases hk with ⟨_, h0⟩ | ⟨n, hk, hn⟩
      · rw [hf] at h0; exact ((mem_botElem 0).mp h0).elim
      · exact ⟨n, Set.mem_univ n, hk⟩
    · intro hk
      obtain ⟨n, _, rfl⟩ := hk
      refine Or.inr ⟨n, rfl, ?_⟩
      rw [hg]; exact Set.mem_univ n

end fcapGdeltaPack

end DomainTheory.DataTypesAsLattices
```

2.7.7 Three-valued ✓

Three-valued elements of $\mathbf{P}\omega$ are $\bot$, the numeral 0, and $\top$. The auxiliary maps uvU and uvV agree on three-valued arguments precisely when at least one argument is 0.

Definition (`ThreeValued`). An element is three-valued when it equals $\bot$, 0, or $\top$.

Definition (`zeroPrime`). $\mathrm{zeroPrime} = 0 \cup 1$.

Definition (`uvU`, `uvV`). Two continuous binary combinations of arguments used to detect equalizers among three-valued values (Scott's U and V tables).

Theorem (`zeroPrime.ne_ofNat_zero`). $\mathrm{zeroPrime} \neq 0$.

Proof. $1 \in \mathrm{zeroPrime}$ but $1 \notin 0$. ■

Theorem (`zeroPrime.ne_top`). $\mathrm{zeroPrime} \neq \top$.

Proof. $2 \notin \mathrm{zeroPrime}$. ■

Theorem (`uvU.mono_left`, `uvU.mono_right`, `uvV.mono_left`, `uvV.mono_right`). Each of uvU and uvV is monotone in each argument separately.

Proof. Enlarging an argument only adds positive membership witnesses used by the clauses. ■

Theorem (`uvU.isScottContinuous_left`, `uvU.isScottContinuous_right`, `uvV.isScottContinuous_left`, `uvV.isScottContinuous_right`). Fixing either argument, both maps are Scott-continuous in the other.

Proof. Each clause that places 0 or 1 in the value is witnessed by a finite e_n from the varying argument; Scott unions reassemble those witnesses, and monotonicity closes the converse. ■

Theorem (`uvU.bot_bot`, `uvU.bot_zero`, `uvU.zero_bot`, `uvU.zero_zero`, `uvU.bot_top`, `uvU.top_bot`, `uvU.zero_top`, `uvU.top_zero`, `uvU.top_top`). The nine three-valued evaluations of uvU match Scott's U-table.

Proof. Direct case analysis on membership of 0 and of positive numerals in $\bot$, 0, and $\top$. ■

Theorem (`uvV.bot_bot`, `uvV.bot_zero`, `uvV.zero_bot`, `uvV.zero_zero`, `uvV.bot_top`, `uvV.top_bot`, `uvV.zero_top`, `uvV.top_zero`, `uvV.top_top`). The nine three-valued evaluations of uvV match Scott's V-table.

Proof. The same case analysis for the clauses defining uvV. ■

Theorem (`ThreeValued.uvU_eq_uvV`). If x and y are three-valued, then $\mathrm{uvU}\,x\,y = \mathrm{uvV}\,x\,y$ if and only if $x = 0$ or $y = 0$.

Proof. Evaluate the nine cases against the tables and the inequalities among $\bot$, 0, $\mathrm{zeroPrime}$, and $\top$. ■

`ThreeValued.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
public import DomainTheory.DataTypesAsLattices.Lambda.Language
import DomainTheory.DataTypesAsLattices.Closures.botElem
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Lambda.ofNat_more

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

def zeroPrime : Pomega := ofNat 0 ∪ ofNat 1
```

```
namespace zeroPrime

theorem ne_ofNat_zero : zeroPrime = ofNat 0 := by
  intro h
  have : (1 : ℕ) ∈ ofNat 0 := by
    have : (1 : ℕ) ∈ zeroPrime := Or.inr rfl
    rwa [h] at this
  simp [ofNat] at this

theorem ne_top : zeroPrime = topElem := by
  intro h
  have : (2 : ℕ) ∈ zeroPrime := by rw [h]; exact Set.mem_univ 2
  simp [zeroPrime, ofNat] at this

end zeroPrime

theorem zero_not_mem_succSet_top : 0 ∈ succSet topElem := by
  intro h
  obtain ⟨n, _, hn⟩ := h
  exact Nat.succ_ne_zero n hn.symm

def uvU (x y : Pomega) : Pomega :=
  {k | (k = 0 ∧ (x.Nonempty ∨ y.Nonempty)) ∨
       (k = 1 ∧ ((0 ∈ x ∧ ∃ n, n + 1 ∈ y) ∨ ((∃ n, n + 1 ∈ x) ∧ 0 ∈ y)))}

namespace uvU

theorem mono_left {x x' y : Pomega} (h : x ⊆ x') : uvU x y ⊆ uvU x' y := by
  intro k hk
  rcases hk with ⟨rfl, hne⟩ | ⟨rfl, h1⟩
  · exact Or.inl ⟨rfl, hne.imp_left fun ⟨n, hn⟩ => ⟨n, h hn⟩⟩
  · rcases h1 with h10 | ⟨⟨n, hn⟩, h0⟩
    · exact Or.inr ⟨rfl, Or.inl ⟨h h10.1, h10.2⟩⟩
    · exact Or.inr ⟨rfl, Or.inr ⟨⟨n, h hn⟩, h0⟩⟩

theorem mono_right {x y y' : Pomega} (h : y ⊆ y') : uvU x y ⊆ uvU x y' := by
  intro k hk
  rcases hk with ⟨rfl, hne⟩ | ⟨rfl, h1⟩
  · exact Or.inl ⟨rfl, hne.imp_right fun ⟨n, hn⟩ => ⟨n, h hn⟩⟩
  · rcases h1 with ⟨h0, ⟨n, hn⟩⟩ | h10
    · exact Or.inr ⟨rfl, Or.inl ⟨h0, ⟨n, h hn⟩⟩⟩
    · exact Or.inr ⟨rfl, Or.inr ⟨h10.1, h h10.2⟩⟩

theorem isScottContinuous_left (y : Pomega) :
    IsScottContinuous (fun x => uvU x y) := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
    rcases hk with ⟨rfl, hne⟩ | ⟨rfl, h1⟩
    · rcases hne with ⟨n, hn⟩ | hy
      · exact mem_scottUnion.mpr ⟨2 ^ n, by simp [e.pow2, Set.singleton_subset_iff, hn
    ],
          Or.inl ⟨rfl, Or.inl ⟨n, by simp [e.pow2]⟩⟩⟩
      · exact mem_scottUnion.mpr ⟨0, by simp [e.zero], Or.inl ⟨rfl, Or.inr hy⟩⟩
```

```
    · rcases h1 with ⟨h0, hp⟩ | ⟨⟨n, hn⟩, h0⟩
      · exact mem_scottUnion.mpr ⟨1, by simp [e_one, h0],
          Or.inr ⟨rfl, Or.inl ⟨by simp [e_one], hp⟩⟩⟩
      · exact mem_scottUnion.mpr ⟨2 ^ (n + 1), by simp [e.pow2, Set.
    singleton_subset_iff, hn],
          Or.inr ⟨rfl, Or.inr ⟨⟨n, by simp [e.pow2]⟩, h0⟩⟩⟩
  · intro hk
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp hk
    exact mono_left hm hkm

theorem isScottContinuous_right (x : Pomega) :
    IsScottContinuous (fun y => uvU x y) := by
  constructor
  intro y
  ext k
  constructor
  · intro hk
    rcases hk with ⟨rfl, hne⟩ | ⟨rfl, h1⟩
    · rcases hne with hx | ⟨n, hn⟩
      · exact mem_scottUnion.mpr ⟨0, by simp [e.zero], Or.inl ⟨rfl, Or.inl hx⟩⟩
      · exact mem_scottUnion.mpr ⟨2 ^ n, by simp [e.pow2, Set.singleton_subset_iff, hn
    ],
          Or.inl ⟨rfl, Or.inr ⟨n, by simp [e.pow2]⟩⟩⟩
    · rcases h1 with ⟨h0, ⟨n, hn⟩⟩ | ⟨hp, h0⟩
      · exact mem_scottUnion.mpr ⟨2 ^ (n + 1), by simp [e.pow2, Set.
    singleton_subset_iff, hn],
          Or.inr ⟨rfl, Or.inl ⟨h0, ⟨n, by simp [e.pow2]⟩⟩⟩⟩
      · exact mem_scottUnion.mpr ⟨1, by simp [e_one, h0],
          Or.inr ⟨rfl, Or.inr ⟨hp, by simp [e_one]⟩⟩⟩
  · intro hk
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp hk
    exact mono_right hm hkm

theorem bot_bot : uvU botElem botElem = botElem := by
  ext k
  simp [uvU, botElem]

theorem bot_zero : uvU botElem (ofNat 0) = ofNat 0 := by
  ext k
  constructor
  · intro hk
    rcases hk with ⟨hk0, _⟩ | ⟨hk1, h1⟩
    · simpa [ofNat] using hk0
    · rcases h1 with ⟨h0, _⟩ | ⟨⟨n, hn⟩, _⟩
      · exact ((mem_botElem 0).mp h0).elim
      · exact ((mem_botElem (n + 1)).mp hn).elim
  · intro hk
    simp [ofNat] at hk
    exact Or.inl ⟨hk, Or.inr ofNat.zero_nonempty⟩

theorem zero_bot : uvU (ofNat 0) botElem = ofNat 0 := by
  ext k
  constructor
  · intro hk
    rcases hk with ⟨hk0, _⟩ | ⟨_, h1⟩
    · simpa [ofNat] using hk0
```

```
    · rcases h1 with ⟨_, ⟨n, hn⟩⟩ | ⟨⟨n, hn⟩, _⟩
      · exact ((mem_botElem (n + 1)).mp hn).elim
      · exact (ofNat.zero_not_pos ⟨n, hn⟩).elim
  · intro hk
    simp [ofNat] at hk
    exact Or.inl ⟨hk, Or.inl ofNat.zero_nonempty⟩

theorem zero_zero : uvU (ofNat 0) (ofNat 0) = ofNat 0 := by
  ext k
  constructor
  · intro hk
    rcases hk with ⟨hk0, _⟩ | ⟨_, h1⟩
    · simpa [ofNat] using hk0
    · rcases h1 with ⟨_, hp⟩ | ⟨hp, _⟩
      · exact (ofNat.zero_not_pos hp).elim
      · exact (ofNat.zero_not_pos hp).elim
  · intro hk
    simp [ofNat] at hk
    exact Or.inl ⟨hk, Or.inl ofNat.zero_nonempty⟩

theorem bot_top : uvU botElem topElem = ofNat 0 := by
  ext k
  constructor
  · intro hk
    rcases hk with ⟨hk0, _⟩ | ⟨_, h1⟩
    · simpa [ofNat] using hk0
    · rcases h1 with ⟨h0, _⟩ | ⟨⟨n, hn⟩, _⟩
      · exact ((mem_botElem 0).mp h0).elim
      · exact ((mem_botElem (n + 1)).mp hn).elim
  · intro hk
    simp [ofNat] at hk
    exact Or.inl ⟨hk, Or.inr ⟨0, Set.mem_univ 0⟩⟩

theorem top_bot : uvU topElem botElem = ofNat 0 := by
  ext k
  constructor
  · intro hk
    rcases hk with ⟨hk0, _⟩ | ⟨_, h1⟩
    · simpa [ofNat] using hk0
    · rcases h1 with ⟨_, ⟨n, hn⟩⟩ | ⟨_, h0⟩
      · exact ((mem_botElem (n + 1)).mp hn).elim
      · exact ((mem_botElem 0).mp h0).elim
  · intro hk
    simp [ofNat] at hk
    exact Or.inl ⟨hk, Or.inl ⟨0, Set.mem_univ 0⟩⟩

theorem zero_top : uvU (ofNat 0) topElem = zeroPrime := by
  ext k
  constructor
  · intro hk
    rcases hk with ⟨hk0, _⟩ | ⟨hk1, _⟩
    · exact Or.inl hk0
    · exact Or.inr hk1
  · intro hk
    rcases hk with hk0 | hk1
    · exact Or.inl ⟨hk0, Or.inr ⟨0, Set.mem_univ 0⟩⟩
```

```
    · exact Or.inr ⟨hk1, Or.inl ⟨rfl, topElem.pos⟩⟩

theorem top_zero : uvU topElem (ofNat 0) = zeroPrime := by
  ext k
  constructor
  · intro hk
    rcases hk with ⟨hk0, _⟩ | ⟨hk1, _⟩
    · exact Or.inl hk0
    · exact Or.inr hk1
  · intro hk
    rcases hk with hk0 | hk1
    · exact Or.inl ⟨hk0, Or.inl ⟨0, Set.mem_univ 0⟩⟩
    · exact Or.inr ⟨hk1, Or.inr ⟨topElem.pos, rfl⟩⟩

theorem top_top : uvU topElem topElem = zeroPrime := by
  ext k
  constructor
  · intro hk
    rcases hk with ⟨hk0, _⟩ | ⟨hk1, _⟩
    · exact Or.inl hk0
    · exact Or.inr hk1
  · intro hk
    rcases hk with hk0 | hk1
    · exact Or.inl ⟨hk0, Or.inl ⟨0, Set.mem_univ 0⟩⟩
    · exact Or.inr ⟨hk1, Or.inl ⟨Set.mem_univ 0, topElem.pos⟩⟩

end uvU

def uvV (x y : Pomega) : Pomega :=
  {k | k = 0 ∨
       (k = 1 ∧ ((∃ n, n + 1 ∈ x) ∨ (∃ n, n + 1 ∈ y))) ∨
       (0 ∈ x ∧ (∃ n, n + 1 ∈ x) ∧ 0 ∈ y ∧ (∃ n, n + 1 ∈ y))}

namespace uvV

theorem mono_left {x x' y : Pomega} (h : x ⊆ x') : uvV x y ⊆ uvV x' y := by
  intro k hk
  rcases hk with hk0 | ⟨hk1, hpos⟩ | ⟨h0, ⟨n, hn⟩, h0y, hpy⟩
  · exact Or.inl hk0
  · exact Or.inr (Or.inl ⟨hk1, hpos.imp_left fun ⟨n, hn⟩ => ⟨n, h hn⟩⟩)
  · exact Or.inr (Or.inr ⟨h h0, ⟨n, h hn⟩, h0y, hpy⟩)

theorem mono_right {x y y' : Pomega} (h : y ⊆ y') : uvV x y ⊆ uvV x y' := by
  intro k hk
  rcases hk with hk0 | ⟨hk1, hpos⟩ | ⟨h0, hpx, h0y, ⟨n, hn⟩⟩
  · exact Or.inl hk0
  · exact Or.inr (Or.inl ⟨hk1, hpos.imp_right fun ⟨n, hn⟩ => ⟨n, h hn⟩⟩)
  · exact Or.inr (Or.inr ⟨h0, hpx, h h0y, ⟨n, h hn⟩⟩)

theorem isScottContinuous_left (y : Pomega) :
    IsScottContinuous (fun x => uvV x y) := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
```

```
    rcases hk with hk0 | ⟨rfl, hpos⟩ | ⟨h0, ⟨n, hn⟩, h0y, hpy⟩
    · exact mem_scottUnion.mpr ⟨0, by simp [e.zero], Or.inl hk0⟩
    · rcases hpos with ⟨n, hn⟩ | hy
      · exact mem_scottUnion.mpr ⟨2 ^ (n + 1), by simp [e.pow2, Set.
    singleton_subset_iff, hn],
          Or.inr (Or.inl ⟨rfl, Or.inl ⟨n, by simp [e.pow2]⟩⟩)⟩
      · exact mem_scottUnion.mpr ⟨0, by simp [e.zero],
          Or.inr (Or.inl ⟨rfl, Or.inr hy⟩)⟩
    · refine mem_scottUnion.mpr ⟨1 ||| 2 ^ (n + 1), e.or_of_subset
        (by simp [e_one, Set.singleton_subset_iff, h0])
        (by simp [e.pow2, Set.singleton_subset_iff, hn]), ?_⟩
      refine Or.inr (Or.inr ⟨?_, ⟨n, ?_⟩, h0y, hpy⟩)
      · simp [e.or, e_one]
      · simp [e.or, e.pow2]
  · intro hk
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp hk
    exact mono_left hm hkm

theorem isScottContinuous_right (x : Pomega) :
    IsScottContinuous (fun y => uvV x y) := by
  constructor
  intro y
  ext k
  constructor
  · intro hk
    rcases hk with hk0 | ⟨rfl, hpos⟩ | ⟨h0, hpx, h0y, ⟨n, hn⟩⟩
    · exact mem_scottUnion.mpr ⟨0, by simp [e.zero], Or.inl hk0⟩
    · rcases hpos with hx | ⟨n, hn⟩
      · exact mem_scottUnion.mpr ⟨0, by simp [e.zero],
          Or.inr (Or.inl ⟨rfl, Or.inl hx⟩)⟩
      · exact mem_scottUnion.mpr ⟨2 ^ (n + 1), by simp [e.pow2, Set.
    singleton_subset_iff, hn],
          Or.inr (Or.inl ⟨rfl, Or.inr ⟨n, by simp [e.pow2]⟩⟩)⟩
    · refine mem_scottUnion.mpr ⟨1 ||| 2 ^ (n + 1), e.or_of_subset
        (by simp [e_one, Set.singleton_subset_iff, h0y])
        (by simp [e.pow2, Set.singleton_subset_iff, hn]), ?_⟩
      refine Or.inr (Or.inr ⟨h0, hpx, ?_, ⟨n, ?_⟩⟩)
      · simp [e.or, e_one]
      · simp [e.or, e.pow2]
  · intro hk
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp hk
    exact mono_right hm hkm

theorem bot_bot : uvV botElem botElem = ofNat 0 := by
  ext k
  constructor
  · intro hk
    rcases hk with hk0 | ⟨hk1, hpos⟩ | htop
    · simpa [ofNat] using hk0
    · rcases hpos with ⟨n, hn⟩ | ⟨n, hn⟩ <;> exact ((mem_botElem (n + 1)).mp hn).elim
    · exact ((mem_botElem 0).mp htop.1).elim
  · intro hk
    simp [ofNat] at hk
    exact Or.inl hk

theorem bot_zero : uvV botElem (ofNat 0) = ofNat 0 := by
```

```
  ext k
  constructor
  · intro hk
    rcases hk with hk0 | ⟨hk1, hpos⟩ | htop
    · simpa [ofNat] using hk0
    · rcases hpos with ⟨n, hn⟩ | hp
      · exact ((mem_botElem (n + 1)).mp hn).elim
      · exact (ofNat.zero_not_pos hp).elim
    · exact ((mem_botElem 0).mp htop.1).elim
  · intro hk
    simp [ofNat] at hk
    exact Or.inl hk

theorem zero_bot : uvV (ofNat 0) botElem = ofNat 0 := by
  ext k
  constructor
  · intro hk
    rcases hk with hk0 | ⟨_, hpos⟩ | htop
    · simpa [ofNat] using hk0
    · rcases hpos with hp | ⟨n, hn⟩
      · exact (ofNat.zero_not_pos hp).elim
      · exact ((mem_botElem (n + 1)).mp hn).elim
    · exact ((mem_botElem 0).mp htop.2.2.1).elim
  · intro hk
    simp [ofNat] at hk
    exact Or.inl hk

theorem zero_zero : uvV (ofNat 0) (ofNat 0) = ofNat 0 := by
  ext k
  constructor
  · intro hk
    rcases hk with hk0 | ⟨_, hpos⟩ | htop
    · simpa [ofNat] using hk0
    · rcases hpos with hp | hp
      · exact (ofNat.zero_not_pos hp).elim
      · exact (ofNat.zero_not_pos hp).elim
    · exact (ofNat.zero_not_pos htop.2.1).elim
  · intro hk
    simp [ofNat] at hk
    exact Or.inl hk

theorem bot_top : uvV botElem topElem = zeroPrime := by
  ext k
  constructor
  · intro hk
    rcases hk with hk0 | ⟨hk1, _⟩ | htop
    · exact Or.inl hk0
    · exact Or.inr hk1
    · exact ((mem_botElem 0).mp htop.1).elim
  · intro hk
    rcases hk with hk0 | hk1
    · exact Or.inl hk0
    · exact Or.inr (Or.inl ⟨hk1, Or.inr topElem.pos⟩)

theorem top_bot : uvV topElem botElem = zeroPrime := by
  ext k
```

```
  constructor
  · intro hk
    rcases hk with hk0 | ⟨hk1, _⟩ | htop
    · exact Or.inl hk0
    · exact Or.inr hk1
    · exact ((mem_botElem 0).mp htop.2.2.1).elim
  · intro hk
    rcases hk with hk0 | hk1
    · exact Or.inl hk0
    · exact Or.inr (Or.inl ⟨hk1, Or.inl topElem.pos⟩)

theorem zero_top : uvV (ofNat 0) topElem = zeroPrime := by
  ext k
  constructor
  · intro hk
    rcases hk with hk0 | ⟨hk1, _⟩ | htop
    · exact Or.inl hk0
    · exact Or.inr hk1
    · exact (ofNat.zero_not_pos htop.2.1).elim
  · intro hk
    rcases hk with hk0 | hk1
    · exact Or.inl hk0
    · exact Or.inr (Or.inl ⟨hk1, Or.inr topElem.pos⟩)

theorem top_zero : uvV topElem (ofNat 0) = zeroPrime := by
  ext k
  constructor
  · intro hk
    rcases hk with hk0 | ⟨hk1, _⟩ | htop
    · exact Or.inl hk0
    · exact Or.inr hk1
    · exact (ofNat.zero_not_pos htop.2.2.2).elim
  · intro hk
    rcases hk with hk0 | hk1
    · exact Or.inl hk0
    · exact Or.inr (Or.inl ⟨hk1, Or.inl topElem.pos⟩)

theorem top_top : uvV topElem topElem = topElem := by
  ext k
  constructor
  · intro _; exact Set.mem_univ k
  · intro _
    exact Or.inr (Or.inr ⟨Set.mem_univ 0, topElem.pos, Set.mem_univ 0, topElem.pos⟩)

end uvV

class ThreeValued (x : Pomega) : Prop where
  out : x = botElem ∨ x = ofNat 0 ∨ x = topElem

namespace ThreeValued

theorem uvU_eq_uvV {x y : Pomega} (hx : ThreeValued x) (hy : ThreeValued y) :
    uvU x y = uvV x y ↔ x = ofNat 0 ∨ y = ofNat 0 := by
  rcases hx.out with rfl | rfl | rfl <;> rcases hy.out with rfl | rfl | rfl


  · simp [uvU.bot_bot, uvV.bot_bot, botElem.ne_ofNat_zero]
```

```
  · simp [uvU.bot_zero, uvV.bot_zero]
  · constructor
    · intro h
      rw [uvU.bot_top, uvV.bot_top] at h
      exact (zeroPrime.ne_ofNat_zero h.symm).elim
    · intro h
      rcases h with h | h
      · exact (botElem.ne_ofNat_zero h).elim
      · exact (topElem.ne_ofNat_zero h).elim
  · simp [uvU.zero_bot, uvV.zero_bot]
  · simp [uvU.zero_zero, uvV.zero_zero]
  · simp [uvU.zero_top, uvV.zero_top]
  · constructor
    · intro h
      rw [uvU.top_bot, uvV.top_bot] at h
      exact (zeroPrime.ne_ofNat_zero h.symm).elim
    · intro h
      rcases h with h | h
      · exact (topElem.ne_ofNat_zero h).elim
      · exact (botElem.ne_ofNat_zero h).elim
  · simp [uvU.top_zero, uvV.top_zero]
  · constructor
    · intro h
      rw [uvU.top_top, uvV.top_top] at h
      exact (zeroPrime.ne_top h).elim
    · intro h
      rcases h with h | h <;> exact (topElem.ne_ofNat_zero h).elim

end ThreeValued

end DomainTheory.DataTypesAsLattices
```

2.7.8 Boolean membership ✓

Boolean membership packages a Scott-continuous map of uniformly bounded values together with a finite set of admissible values inside that bound; the class contains every Scott-open set and is closed under the Boolean operations.

Definition (`BooleanMemE`). A set U has Boolean membership when there exist a Scott-continuous f, a bound N, and a finite set E of subsets of $\{m \mid m < N\}$ such that $f(x) \subseteq \{m \mid m < N\}$ for every x and $U = \{x \mid f(x) \in E\}$.

Theorem (`BooleanMemE.finite_Iio`). Every initial segment $\{m \mid m < N\}$ of ω is finite.

Proof. It coincides with the finite set $\{0, \dots, N-1\}$. ■

Theorem (`BooleanMemE.finite_subsets_lt`). The set of subsets of $\{m \mid m < N\}$ is finite.

Proof. The powerset of a finite set is finite. ■

Theorem (`BooleanMemE.ofOpen`). Every Scott-open set has Boolean membership.

Proof. Take $f = \mathrm{charOpen}\, U$, bound 1, and $E = \{0\}$. Continuity of the characteristic map is already known; Scott-open membership supplies a finite witness forcing $\mathrm{charOpen}\, U\, x = 0$, and conversely a zero value yields a witness in U. ■

Theorem (`BooleanMemE.union`). Boolean membership is closed under binary unions.

Proof. Odd–even pack the two witnessing maps with bound $2\max(N, M) + 1$, and admit those packed values whose odd part lies in the first admissible set or whose even part lies in the second; the parity

projections recover membership in either factor. ■

Theorem (`BooleanMemE.inter`). Boolean membership is closed under binary intersections.

Proof. The same packing and bound, now requiring both parity projections to land in the respective admissible sets. ■

Theorem (`BooleanMemE.compl`). Boolean membership is closed under complements.

Proof. Keep the same continuous map and bound, and replace the admissible set by its relative complement inside the finite powerset of $\{m \mid m < N\}$. ■

BooleanMemE.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Classification.CharacteristicMaps
import DomainTheory.DataTypesAsLattices.Classification.OddEvenPack
import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
import Mathlib.Data.Set.Finite.Powerset

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

def BooleanMemE (U : Set Pomega) : Prop :=
  ∃ (f : Pomega → Pomega) (N : ℕ) (E : Set Pomega),
    IsScottContinuous f ∧
      (∀ x, f x ⊆ {m | m < N}) ∧
        E.Finite ∧ (∀ e ∈ E, e ⊆ {m | m < N}) ∧
          U = {x | f x ∈ E}

namespace BooleanMemE

theorem finite_Iio (N : ℕ) : ({m : ℕ | m < N}).Finite :=
  Set.Finite.ofFinset (Finset.range N) fun x => by simp

theorem finite_subsets_lt (N : ℕ) :
    ({y : Pomega | y ⊆ {m | m < N}}).Finite :=
  (finite_Iio N).finite_subsets

theorem ofOpen {U : Set Pomega} (hU : IsScottOpen U) :
    BooleanMemE U := by
  refine ⟨charOpen U, 1, {ofNat 0}, charOpen.isScottContinuous U, ?_, ?_, ?_, ?_⟩
  · intro x k hk
    rcases hk with ⟨rfl, _⟩
    exact Nat.zero_lt_one
  · exact Set.finite_singleton _
  · intro e he
    simp [ofNat] at he
    subst he
    intro k hk
    simp at hk
    subst hk
    exact Nat.zero_lt_one
```

```
  · ext x
    constructor
    · intro hx
      change charOpen U x = ofNat 0
      ext k
      constructor
      · intro ⟨hk0, n, hn, hne⟩
        simp [ofNat, hk0]
      · intro hk
        simp [ofNat] at hk
        subst hk
        obtain ⟨n, hn, hne⟩ := (IsScottOpen.mem_iff hU).mp hx
        exact ⟨rfl, n, hn, hne⟩
    · intro hx
      have : 0 ∈ charOpen U x := by
        have : charOpen U x = ofNat 0 := hx
        rw [this]; simp [ofNat]
      obtain ⟨_, n, hn, hne⟩ := this
      exact isScottOpen_isUpper hU hne hn

theorem union {U V : Set Pomega}
    (hU : BooleanMemE U) (hV : BooleanMemE V) : BooleanMemE (U ∪ V) := by
  obtain ⟨f, N, E, hf, hfb, hEf, hEsub, rfl⟩ := hU
  obtain ⟨g, M, F, hg, hgb, hFf, hFsub, rfl⟩ := hV
  let N' := 2 * max N M + 1
  let E' : Set Pomega :=
    {y | y ⊆ {m | m < N'} ∧ (evenPart y ∈ F ∨ oddPart y ∈ E)}
  refine ⟨oddEvenPack f g, N', E',
    oddEvenPack.isScottContinuous hf hg, ?_, ?_, ?_, ?_⟩
  · intro x
    exact oddEvenPack.subset (hfb x) (hgb x)
  · have hpow := finite_subsets_lt N'
    exact hpow.subset fun y hy => hy.1
  · intro y hy; exact hy.1
  · ext x
    constructor
    · intro hx
      refine ⟨oddEvenPack.subset (hfb x) (hgb x), ?_⟩
      rw [oddEvenPack.evenPart, oddEvenPack.oddPart]
      rcases hx with h | h
      · exact Or.inr h
      · exact Or.inl h
    · intro hx
      have hx' := hx.2
      rw [oddEvenPack.evenPart, oddEvenPack.oddPart] at hx'
      rcases hx' with h | h
      · exact Or.inr h
      · exact Or.inl h

theorem inter {U V : Set Pomega}
    (hU : BooleanMemE U) (hV : BooleanMemE V) : BooleanMemE (U ∩ V) := by
  obtain ⟨f, N, E, hf, hfb, hEf, hEsub, rfl⟩ := hU
  obtain ⟨g, M, F, hg, hgb, hFf, hFsub, rfl⟩ := hV
  let N' := 2 * max N M + 1
  let E' : Set Pomega :=
    {y | y ⊆ {m | m < N'} ∧ evenPart y ∈ F ∧ oddPart y ∈ E}
```

```
  refine ⟨oddEvenPack f g, N', E',
    oddEvenPack.isScottContinuous hf hg, ?_, ?_, ?_, ?_⟩
  · intro x
    exact oddEvenPack.subset (hfb x) (hgb x)
  · have hpow := finite_subsets_lt N'
    exact hpow.subset fun y hy => hy.1
  · intro y hy; exact hy.1
  · ext x
    constructor
    · intro hx
      refine ⟨oddEvenPack.subset (hfb x) (hgb x), ?_⟩
      rw [oddEvenPack.evenPart, oddEvenPack.oddPart]
      exact ⟨hx.2, hx.1⟩
    · intro hx
      have : evenPart (oddEvenPack f g x) ∈ F ∧
          oddPart (oddEvenPack f g x) ∈ E := ⟨hx.2.1, hx.2.2⟩
      rw [oddEvenPack.evenPart, oddEvenPack.oddPart] at this
      exact ⟨this.2, this.1⟩

theorem compl {U : Set Pomega} (hU : BooleanMemE U) :
    BooleanMemE U? := by
  obtain ⟨f, N, E, hf, hfb, hEf, hEsub, rfl⟩ := hU
  let E' : Set Pomega := {y | y ⊆ {m | m < N} ∧ y ∈ E}
  refine ⟨f, N, E', hf, hfb, ?_, fun y hy => hy.1, ?_⟩
  · exact (finite_subsets_lt N).subset fun y hy => hy.1
  · ext x
    constructor
    · intro hx
      exact ⟨hfb x, hx⟩
    · intro hx
      exact hx.2

end BooleanMemE

end DomainTheory.DataTypesAsLattices
```

2.7.9 Theorem 6.1 — the G theorem ✓

THEOREM 6.1 (The $\mathfrak{G}$ theorem). *The open subsets of* $\mathbf{P}\omega$ *are exactly the sets of the form:*

$$\{x \mid f(x) \supseteq 0\},$$

where $f : \mathbf{P}\omega \to \mathbf{P}\omega$ *is continuous.*

We could have written $0 \in f(x)$ or the equation $f(x) \cap 0 = 0$ instead of $f(x) \supseteq 0$. Note that in case $f : \mathbf{P}\omega \to \{\bot, \top\}$, then $f(x) \supseteq 0$ is equivalent to $f(x) = \top$. Also any other integer could have been used in place of 0.

We can say that $\{x \mid 0 \in x\}$ is the *typical* open set, and that every other open set can be obtained as an inverse image of the typical set by a continuous function. We shall extend this pattern to other classes, especially looking for equations. In the case of openness an inequality could also be used, giving as the typical set $\{x \mid x \neq \bot\}$. But since closed sets are just the complements of open sets, this remark gives us:

Theorem (`theorem_6_1`). A subset $U \subseteq \mathbf{P}\omega$ is Scott-open if and only if $U = \{x \mid 0 \in f(x)\}$ for some Scott-continuous $f : \mathbf{P}\omega \to \mathbf{P}\omega$.

Proof. If f is Scott-continuous, then $0 \in f(x)$ holds exactly when some finite $e_n \subseteq x$ already satisfies $0 \in f(e_n)$, so the fibre is a union of basic Scott neighbourhoods. Conversely, the characteristic map $\mathrm{charOpen}\, U$ is Scott-continuous and equals the numeral 0 precisely on U, so membership of 0 recovers U. ■

theorem_6_1.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Classification.CharacteristicMaps
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

theorem theorem_6_1 :
    (∀ f : Pomega → Pomega, IsScottContinuous f →
        IsScottOpen {x | 0 ∈ f x}) ∧
      (∀ U, IsScottOpen U →
        ∃ f, IsScottContinuous f ∧ U = {x | 0 ∈ f x}) := by
  constructor
  · intro f hf
    refine ⟨{n | 0 ∈ f (e n)}, ?_⟩
    ext x
    constructor
    · intro hx
      have : 0 ∈ scottUnion f x := by rwa [← hf.out x]
      obtain ⟨n, hn, h0⟩ := mem_scottUnion.mp this
      exact Set.mem_iUnion₂.mpr ⟨n, h0, hn⟩
    · intro hx
      obtain ⟨n, h0, hn⟩ := Set.mem_iUnion₂.mp hx
      exact IsScottContinuous.monotone hf hn h0
  · intro U hU
    refine ⟨charOpen U, charOpen.isScottContinuous U, ?_⟩
    ext x
    constructor
    · intro hx
      obtain ⟨B, rfl⟩ := hU
      obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
      refine ⟨rfl, n, hxn, ?_⟩
      exact Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩
    · intro ⟨_, n, hn, hne⟩
      exact isScottOpen_isUpper hU hne hn

end DomainTheory.DataTypesAsLattices
```

2.7.10 Theorem 6.2 — the F theorem ✓

THEOREM 6.2 (The $\mathfrak{F}$ theorem). *The closed subsets of* $\mathbf{P}\omega$ *are exactly the sets of the form:*

$$\{x \mid f(x) = \bot\},$$

where $f : \mathbf{P}\omega \to \mathbf{P}\omega$ *is continuous.*

Aside from $\{x \mid x = \bot\}$, we could have used $\{x \mid x \subseteq a\}$ as the typical closed set where $a \in \mathbf{P}\omega$ is any element whatsoever aside from $\top$. This $\top$ has, by the way, a

special character. We note:

$$\{\top\} = \bigcap\{\{x \mid n \in x\} \mid n \in \omega\}.$$

Thus $\{\top\}$ is a countable intersection of open sets, otherwise called a $\mathfrak{G}_\delta$-set. There are of course many other $\mathfrak{G}_\delta$-sets, but $\{\top\}$ is the typical one:

Theorem (`theorem_6_2`). A subset $U \subseteq \mathbf{P}\omega$ is Scott-closed if and only if $U = \{x \mid f(x) = \bot\}$ for some Scott-continuous $f : \mathbf{P}\omega \to \mathbf{P}\omega$.

Proof. If U is closed, then $\mathrm{charTop}\, U^{\mathrm{c}}$ is Scott-continuous and equals $\bot$ precisely on U. Conversely, if f is Scott-continuous then the complement of $\{x \mid f(x) = \bot\}$ is the union over k of the open fibres $\{x \mid k \in f(x)\}$, hence open, so the fibre of $\bot$ is closed. ■

`theorem_6_2.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Classification.Classes
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Classification.CharacteristicMaps
import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

theorem theorem_6_2 :
    ∀ U, U ∈ ScottF ↔ ∃ f, IsScottContinuous f ∧ U = {x | f x = botElem} := by
  intro U
  constructor
  · intro hU
    refine ⟨charTop U?, charTop.isScottContinuous U?, ?_⟩
    ext x
    exact (charTop.eq_bot_of_closed hU x).symm
  · rintro ⟨f, hf, rfl⟩
    change IsScottOpen {x | f x = botElem}?
    have : {x | f x = botElem}? = ⋃ k, {x | k ∈ f x} := by
      ext x
      constructor
      · intro hx
        have hx' : f x = botElem := hx
        have : ∃ k, k ∈ f x := by
          by_contra hnone
          apply hx'
          ext n
          constructor
          · intro hn
```

```
          exact (hnone ⟨n, hn⟩).elim
        · intro hn
          exact ((mem_botElem n).mp hn).elim
      exact Set.mem_iUnion.mpr this
    · intro hx hbot
      obtain ⟨k, hk⟩ := Set.mem_iUnion.mp hx
      have hk' : k ∈ f x := hk
      have hbot' : f x = botElem := hbot
      rw [hbot'] at hk'
      exact ((mem_botElem k).mp hk').elim
  rw [this]
  exact IsScottOpen.iUnion _ fun k => IsScottContinuous.mem_preimage hf k

end DomainTheory.DataTypesAsLattices
```

2.7.11 Theorem 6.3 — the Gδ theorem ✓

THEOREM 6.3 (The $\mathfrak{G}_\delta$ theorem). *The countable intersections of open subsets of $\mathbf{P}\omega$ are exactly the sets of the form:*

$$\{x \mid f(x) = \top\},$$

where $f : \mathbf{P}\omega \to \mathbf{P}\omega$ is continuous.

It may not be obvious that every $\mathfrak{G}_\delta$-set has this form. Certainly, as we have remarked, every $\mathfrak{G}$-set has this form. Thus if W is a $\mathfrak{G}_\delta$, we have:

$$W = \bigcap\{U_n \mid n \in \omega\},$$

and further,

$$U_n = \{x \mid f_n(x) = \top\},$$

where the f_n are suitably chosen continuous functions. Define the function g by the equation:

$$g(x) = \{(n, m) \mid m \in f_n(x)\}.$$

Clearly g is continuous, and we have:

$$W = \{x \mid g(x) = \top\},$$

as desired.

We let $\mathfrak{F}\dot{\cap}\mathfrak{G}$ denote the class of all sets of the form $C \cap U$, where $C \in \mathfrak{F}$ and $U \in \mathfrak{G}$. Similarly for $\mathfrak{F}\dot{\cap}\mathfrak{G}_\delta$. Now $\{x \mid x \subseteq 0\}$ is closed and $\{x \mid x \supseteq 0\}$ is open. Thus $\{0\} \in \mathfrak{F}\dot{\cap}\mathfrak{G}$. This set is typical.

Theorem (`theorem_6_3`). A subset $U \subseteq \mathbf{P}\omega$ is a $\mathfrak{G}_\delta$ if and only if $U = \{x \mid f(x) = \top\}$ for some Scott-continuous $f : \mathbf{P}\omega \to \mathbf{P}\omega$.

Proof. If $U = \bigcap_n U_n$ with each U_n Scott-open, pair-index the maps $\mathrm{charTop}\, U_n$; the packed value is $\top$ precisely when every factor is $\top$, hence precisely on the intersection. Conversely, if f is Scott-continuous then $\{x \mid f(x) = \top\}$ is the intersection over n of the open fibres $\{x \mid n \in f(x)\}$. ■

`theorem_6_3.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Classification.Classes
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Classification.CharacteristicMaps
import DomainTheory.DataTypesAsLattices.Classification.pairIndexed

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

theorem theorem_6_3 :
    ∀ U, IsScottGdelta U ↔ ∃ f, IsScottContinuous f ∧ U = {x | f x = topElem} := by
  intro U
  constructor
  · rintro ⟨Us, hUs, rfl⟩
    let fs := fun n => charTop (Us n)
    refine ⟨pairIndexed fs, pairIndexed.isScottContinuous fs fun n =>
      charTop.isScottContinuous (Us n), ?_⟩
    ext x
    constructor
    · intro hx
      change pairIndexed fs x = topElem
      exact (pairIndexed.eq_top fs x).mpr fun n =>
        (charTop.eq_top (hUs n) x).mpr (Set.mem_iInter.mp hx n)
    · intro hf
      have hf' : pairIndexed fs x = topElem := hf
      exact Set.mem_iInter.mpr fun n =>
        (charTop.eq_top (hUs n) x).mp ((pairIndexed.eq_top fs x).mp hf' n)
  · rintro ⟨f, hf, rfl⟩
    refine ⟨fun n => {x | n ∈ f x}, fun n => IsScottContinuous.mem_preimage hf n, ?_⟩
    ext x
    constructor
    · intro hx
      refine Set.mem_iInter.mpr fun n => ?_
      have : f x = topElem := hx
      simp [this]
    · intro hx
      ext k
      constructor
      · intro _; trivial
      · intro _
        exact Set.mem_iInter.mp hx k

end DomainTheory.DataTypesAsLattices
```

2.7.12 Theorem 6.4 — the F∩G theorem ✓

THEOREM 6.4 (The $\mathfrak{F}\hat{\cap}\mathfrak{G}$ theorem). *The sets that are intersections of closed sets with open sets are exactly the sets of the form:*

$$\{x \mid f(x) = 0\},$$

where $f : \mathbf{P}\omega \to \mathbf{P}\omega$ is continuous.

Again it may not be obvious that every $\mathfrak{F}\dot{\cap}\mathfrak{G}$ set has this form. We can write:

$$C = \{x \mid f(x) = \bot\},$$

and

$$U = \{x \mid g(x) = 0\},$$

where $C \in \mathfrak{F}$ and $U \in \mathfrak{G}$ and the continuous f and g are suitably chosen. Define

$$h(x) = \{2n+1 \mid n \in f(x)\} \cup \{2n \mid n \in g(x)\},$$

and remark that h is continuous. We have:

$$C \cap U = \{x \mid h(x) = 0\},$$

as desired.

It is easy to see that $\{e\} \in \mathfrak{F}\dot{\cap}\mathfrak{G}$ if e is finite, but in general $\{a\} \notin \mathfrak{F}\dot{\cap}\mathfrak{G}_\delta$. In

In case a is infinite but not equal to $\top$ (say, $a = \{n \mid n > 0\} = \top + 1$), then $\{a\}$ is typical in its class.

Theorem (`theorem_6_4`). A subset $U \subseteq \mathbf{P}\omega$ belongs to $\mathfrak{F}\dot{\cap}\mathfrak{G}$ if and only if $U = \{x \mid f(x) = 0\}$ for some Scott-continuous $f : \mathbf{P}\omega \to \mathbf{P}\omega$.

Proof. If $U = C \cap O$ with C closed and O open, odd–even pack $\mathrm{charTop}\, C^{\mathrm{c}}$ with $\mathrm{charOpen}\, O$; the packed value equals the numeral 0 precisely when the closed factor is $\bot$ and the open factor is 0. Conversely, if f is Scott-continuous then $\{x \mid f(x) = 0\}$ is the intersection of the closed set $\{x \mid f(x) \subseteq 0\}$ with the open fibre $\{x \mid 0 \in f(x)\}$. ■

theorem_6_4.lean

```
module

public import DomainTheory.DataTypesAsLattices.Classification.Classes
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
public import DomainTheory.DataTypesAsLattices.Lambda.Language
import DomainTheory.DataTypesAsLattices.Classification.CharacteristicMaps
import DomainTheory.DataTypesAsLattices.Classification.OddEvenPack
import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

theorem theorem_6_4 :
    ∀ U, IsFcapG U ↔ ∃ f, IsScottContinuous f ∧ U = {x | f x = ofNat 0} := by
  intro U
  constructor
  · rintro ⟨C, O, hC, hO, rfl⟩
    refine ⟨oddEvenPack (charTop C?) (charOpen O),
      oddEvenPack.isScottContinuous (charTop.isScottContinuous C?)
        (charOpen.isScottContinuous O), ?_⟩
```

```
  ext x
  constructor
  · intro hx
    change oddEvenPack (charTop C?) (charOpen O) x = ofNat 0
    refine (oddEvenPack.eq_zero x).mpr ?_
    have hx' : x ∈ C ∧ x ∈ O := hx
    constructor
    · exact (charTop.eq_bot_of_closed hC x).mpr hx'.1
    · ext k
      constructor
      · intro ⟨hk0, n, hn, hne⟩
        simp [ofNat, hk0]
      · intro hk
        simp [ofNat] at hk
        subst hk
        obtain ⟨n, hn, hne⟩ := (IsScottOpen.mem_iff hO).mp hx'.2
        exact ⟨rfl, n, hn, hne⟩
  · intro hf
    have hf' := (oddEvenPack.eq_zero (f := charTop C?) (g := charOpen O) x).mp hf
    constructor
    · exact (charTop.eq_bot_of_closed hC x).mp hf'.1
    · have : 0 ∈ charOpen O x := by rw [hf'.2]; simp [ofNat]
      obtain ⟨_, n, hn, hne⟩ := this
      exact isScottOpen_isUpper hO hne hn
· rintro ⟨f, hf, rfl⟩
  refine ⟨{x | f x ⊆ ofNat 0}, {x | 0 ∈ f x}, ?_,
    IsScottContinuous.mem_preimage hf 0, ?_⟩
  · have : {x | f x ⊆ ofNat 0}? = ⋃ k : ℕ, {x | k = 0 ∧ k ∈ f x} := by
      ext x
      constructor
      · intro hx
        have : ¬ f x ⊆ ofNat 0 := hx
        obtain ⟨k, hk, hk0⟩ := Set.not_subset.mp this
        refine Set.mem_iUnion.mpr ⟨k, ?_⟩
        simp [ofNat] at hk0
        exact ⟨hk0, hk⟩
      · intro hx
        obtain ⟨k, hk0, hk⟩ := Set.mem_iUnion.mp hx
        intro hsub
        exact hk0 (hsub hk)
    rw [this]
    exact IsScottOpen.iUnion _ fun k => by
      by_cases hk0 : k = 0
      · subst hk0
        have : {x | (0 : ℕ) = 0 ∧ 0 ∈ f x} = (∅ : Set Pomega) := by
          ext x; simp
        rw [this]; exact IsScottOpen.empty
      · have : {x | k = 0 ∧ k ∈ f x} = {x | k ∈ f x} := by
          ext x; simp [hk0]
        rw [this]; exact IsScottContinuous.mem_preimage hf k
  · ext x
    constructor
    · intro hx
      change f x ⊆ ofNat 0 ∧ 0 ∈ f x
      have hx' : f x = ofNat 0 := hx
      constructor
```

```
        · simp [hx']
        · simp [hx', ofNat]
      · intro hx
        change f x = ofNat 0
        ext n
        simp [ofNat]
        constructor
        · intro hn; exact hx.1 hn
        · intro hn; simpa [hn] using hx.2

end DomainTheory.DataTypesAsLattices
```

2.7.13 Theorem 6.5 — the F∩Gδ theorem ✓

THEOREM 6.5 (The $\mathfrak{F}\dot{\cap}\mathfrak{G}_\delta$ theorem). *The sets that are intersections of closed sets with countable intersections of open sets are exactly the sets of the form:*

$$\{x \mid f(x) = a\},$$

where $f : \mathbf{P}\omega \to \mathbf{P}\omega$ is continuous and a is a fixed infinite set not equal to $\top$.

Note that $(\mathfrak{F}\dot{\cap}\mathfrak{G})_\delta$ is the same class as $\mathfrak{F}\dot{\cap}\mathfrak{G}_\delta$, so we see by Theorem 6.4 that a good choice of a is $\lambda n \in \omega.0$.

There is no single subset of $\mathbf{P}\omega$ typical for $\mathfrak{B}$, which can be viewed as the finite unions of sets from the class $\mathfrak{F}\dot{\cap}\mathfrak{G}$.

Theorem (`theorem_6_5`). A subset $U \subseteq \mathbf{P}\omega$ belongs to $\mathfrak{F}\dot{\cap}\mathfrak{G}_\delta$ if and only if $U = \{x \mid f(x) = \mathrm{succSet}\,\top\}$ for some Scott-continuous $f : \mathbf{P}\omega \to \mathbf{P}\omega$.

Proof. If $U = C \cap G$ with C closed and G a $\mathfrak{G}_\delta$, take a continuous fibre of $\top$ for G by Theorem 6.3 and pack it with $\mathrm{charTop}\, C^{\mathrm{c}}$; the packed value equals $\mathrm{succSet}\,\top$ precisely when the closed factor is $\bot$ and the $\mathfrak{G}_\delta$ factor is $\top$. Conversely, if f is Scott-continuous then $\{x \mid f(x) = \mathrm{succSet}\,\top\}$ is the intersection of the closed set $\{x \mid f(x) \subseteq \mathrm{succSet}\,\top\}$ with the $\mathfrak{G}_\delta$ set $\{x \mid \mathrm{succSet}\,\top \subseteq f(x)\}$. ■

theorem_6_5.lean

```
module

public import DomainTheory.DataTypesAsLattices.Classification.Classes
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
public import DomainTheory.DataTypesAsLattices.Lambda.Language
import DomainTheory.DataTypesAsLattices.Classification.CharacteristicMaps
import DomainTheory.DataTypesAsLattices.Classification.fcapGdeltaPack
import DomainTheory.DataTypesAsLattices.Classification.theorem_6_3

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

theorem theorem_6_5 :
    ∀ U, IsFcapGdelta U ↔
      ∃ f, IsScottContinuous f ∧ U = {x | f x = succSet topElem} := by
  intro U
```

```
  constructor
  · rintro ⟨C, G, hC, hG, rfl⟩
    obtain ⟨fG, hfG, rflG⟩ := (theorem_6_3 G).mp hG
    refine ⟨fcapGdeltaPack (charTop C?) fG,
      fcapGdeltaPack.isScottContinuous (charTop.isScottContinuous C?) hfG, ?_⟩
    ext x
    have hfval : charTop C? x = botElem ∨ charTop C? x = topElem := by
      by_cases hx : x ∈ C
      · exact Or.inl ((charTop.eq_bot_of_closed hC x).mpr hx)
      · exact Or.inr ((charTop.eq_top hC x).mpr hx)
    constructor
    · intro ⟨hxC, hxG⟩
      have hf : charTop C? x = botElem := (charTop.eq_bot_of_closed hC x).mpr hxC
      have hg : fG x = topElem := by rw [rflG] at hxG; exact hxG
      exact (fcapGdeltaPack.eq hfval).mpr ⟨hf, hg⟩
    · intro hpack
      obtain ⟨hf, hg⟩ := (fcapGdeltaPack.eq hfval).mp hpack
      exact ⟨(charTop.eq_bot_of_closed hC x).mp hf, by rw [rflG]; exact hg⟩
  · rintro ⟨f, hf, rfl⟩
    refine ⟨{x | f x ⊆ succSet topElem}, {x | succSet topElem ⊆ f x}, ?_, ?_, ?_⟩
    · have : {x | f x ⊆ succSet topElem}? = {x | 0 ∈ f x} := by
        ext x
        constructor
        · intro hx
          obtain ⟨k, hk, hknotin⟩ := Set.not_subset.mp hx
          have hk0 : k = 0 := by
            by_contra hne
            exact hknotin ⟨k - 1, Set.mem_univ _, (Nat.succ_pred_eq_of_ne_zero hne).
    symm⟩
          simpa [hk0] using hk
        · intro h0 hsub
          exact zero_not_mem_succSet_top (hsub h0)
      rw [this]
      exact IsScottContinuous.mem_preimage hf 0
    · refine ⟨fun n => {x | n + 1 ∈ f x},
        fun n => IsScottContinuous.mem_preimage hf (n + 1), ?_⟩
      ext x
      constructor
      · intro hx
        exact Set.mem_iInter.mpr fun n => hx ⟨n, Set.mem_univ n, rfl⟩
      · intro hx k hk
        obtain ⟨n, _, rfl⟩ := hk
        exact Set.mem_iInter.mp hx n
    · ext x
      constructor
      · intro hx
        change f x ⊆ succSet topElem ∧ succSet topElem ⊆ f x
        have hx' : f x = succSet topElem := hx
        constructor <;> simp [hx']
      · intro hx
        change f x = succSet topElem
        exact subset_antisymm hx.1 hx.2

end DomainTheory.DataTypesAsLattices
```

2.7.14 Theorem 6.6 — the B theorem ✓

THEOREM 6.6 (The $\mathfrak{B}$ theorem). *The sets that are Boolean combinations of open sets are exactly the sets of the form:*

$$\{x \mid f(x) \in \mathcal{E}\},$$

where $f : \mathbf{P}\omega \to \mathbf{P}\omega$ is continuous and $\mathcal{E}$ is a finite set of finite elements of $\mathbf{P}\omega$.

To see that every $\mathfrak{B}$ set has this form, suppose that

$$V = W_0 \cup W_1 \cup \cdots \cup W_{n-1},$$

where each $W_i \in \mathfrak{F}\dot{\cap}\mathfrak{G}$. We can write:

$$W_i = \{x \mid f_i(x) = 0\},$$

where $f_i : \mathbf{P}\omega \to \{\bot, 0, \top\}$ is continuous. Then define:

$$g(x) = \{2i + j \mid j \in f_i(x) \cap \{0, 1\}, i < n\},$$

and note that g is continuous. Let

$$\mathcal{E} = \{y \subseteq \{m \mid m < 2n\} \mid \exists i < n.2i \in y, 2i + 1 \notin y\};$$

we have:

$$V = \{x \mid g(x) \in \mathcal{E}\}$$

as desired.

Theorem (`theorem_6_6`). A subset $U \subseteq \mathbf{P}\omega$ is a Boolean combination of Scott-open sets if and only if $U = \{x \mid f(x) \in E\}$ for some Scott-continuous f and some finite set E of finite elements of $\mathbf{P}\omega$.

Proof. Boolean membership yields a continuous map of uniformly bounded values with a finite admissible set of subsets of that bound, each of which is finite. Conversely, each fibre $\{x \mid f(x) = e\}$ for finite e is an $\mathfrak{F}\dot{\cap}\mathfrak{G}$ set (closed upper and open lower sandwich), hence Boolean, and a finite union of those fibres recovers $\{x \mid f(x) \in E\}$. ■

theorem_6_6.lean

```
module

public import DomainTheory.DataTypesAsLattices.Classification.Classes
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Classification.BooleanMemE
import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace
```

```
theorem theorem_6_6 :
    ∀ U, U ∈ ScottB ↔
      ∃ f, IsScottContinuous f ∧ ∃ E : Set Pomega,
        E.Finite ∧ (∀ e ∈ E, e.Finite) ∧ U = {x | f x ∈ E} := by
  intro U
  constructor
  · intro hU
    have : BooleanMemE U := by
      induction hU with
      | ofOpen hU => exact BooleanMemE.ofOpen hU
      | union _ _ ihU ihV => exact BooleanMemE.union ihU ihV
      | inter _ _ ihU ihV => exact BooleanMemE.inter ihU ihV
      | compl _ ih => exact BooleanMemE.compl ih
    obtain ⟨f, N, E, hf, hfb, hEf, hEsub, rfl⟩ := this
    refine ⟨f, hf, E, hEf, fun e he => (BooleanMemE.finite_Iio N).subset (hEsub e he),
    rfl⟩
  · rintro ⟨f, hf, E, hE, hEfin, rfl⟩
    have : {x | f x ∈ E} = ⋃₀ ((fun e => {x | f x = e}) '' E) := by
      ext x
      constructor
      · intro hx
        exact ⟨{y | f y = f x}, ⟨f x, hx, rfl⟩, rfl⟩
      · intro hx
        obtain ⟨_, ⟨e, he, rfl⟩, hx'⟩ := hx
        have hxeq : f x = e := hx'
        change f x ∈ E
        rwa [hxeq]
    rw [this]
    refine IsBooleanOpen.sUnion_finite (hE.image _) fun W hW => ?_
    obtain ⟨e, heE, rfl⟩ := hW
    have hefin : e.Finite := hEfin e heE
    have hopen : IsScottOpen {x | e ⊆ f x} := by
      have : {x | e ⊆ f x} = ⋂ k ∈ hefin.toFinset, {x | k ∈ f x} := by
        ext x
        constructor
        · intro hx
          exact Set.mem_iInter₂.mpr fun k hk => hx (hefin.mem_toFinset.mp hk)
        · intro hx k hk
          exact Set.mem_iInter₂.mp hx k (hefin.mem_toFinset.mpr hk)
      rw [this, isScottOpen_iff_isOpen]
      exact isOpen_biInter_finset fun k _ =>
        (isScottOpen_iff_isOpen _).mp (IsScottContinuous.mem_preimage hf k)
    have hclosed : IsScottOpen {x | f x ⊆ e}ᶜ := by
      have : {x | f x ⊆ e}ᶜ = ⋃ k, {x | k ∈ e ∧ k ∈ f x} := by
        ext x
        constructor
        · intro hx
          obtain ⟨k, hk, hke⟩ := Set.not_subset.mp hx
          exact Set.mem_iUnion.mpr ⟨k, ⟨hke, hk⟩⟩
        · intro hx
          obtain ⟨k, hke, hk⟩ := Set.mem_iUnion.mp hx
          intro hsub
          exact hke (hsub hk)
      rw [this]
      exact IsScottOpen.iUnion _ fun k => by
        by_cases hke : k ∈ e
```

```
      · have : {x | k ∈ e ∧ k ∈ f x} = (∅ : Set Pomega) := by
          ext x; simp [hke]
        rw [this]; exact IsScottOpen.empty
      · have : {x | k ∈ e ∧ k ∈ f x} = {x | k ∈ f x} := by
          ext x; simp [hke]
        rw [this]; exact IsScottContinuous.mem_preimage hf k
  exact IsBooleanOpen.of_fcapG ⟨{x | f x ⊆ e}, {x | e ⊆ f x}, hclosed, hopen, by
    ext x
    constructor
    · intro hx
      have : f x = e := by
        have : f x ∈ ({e} : Set Pomega) := hx
        simpa using this
      exact ⟨this.subset, this.symm.subset⟩
    · intro hx
      have : f x = e := subset_antisymm hx.1 hx.2
      simp [this]⟩

end DomainTheory.DataTypesAsLattices
```

2.7.15 Theorem 6.7 — the Bδ theorem ✓

THEOREM 6.7 (The $\mathfrak{B}_\delta$ theorem). *The sets that are countable intersections of Boolean combinations of open sets are exactly the sets of the form:*

$$\{x \mid f(x) = g(x)\},$$

where $f, g : \mathbf{P}\omega \to \mathbf{P}\omega$ are continuous.

This is clearly the most interesting of these characterization theorems, because equations like $f(x) = g(x)$ turn up all the time and the collection is a very rich totality of subsets of $\mathbf{P}\omega$. It includes all the retracts, since they are of the form $\{x \mid x = a(x)\}$. And much more. That every such set in Theorem 6.7 is $\mathfrak{B}_\delta$ follows from these logical transformations:

$$\{x \mid f(x) = g(x)\} = \{x \mid \forall n \in \omega[n \in f(x) \leftrightarrow n \in g(x)]\}$$

$$= \bigcap_{n=0}^{\infty} (\{x \mid n \in f(x), n \in g(x)\} \cup \{x \mid n \notin f(x), n \notin g(x)\})$$

That puts the set in the class $(\mathfrak{F} \cup \mathfrak{G})_\delta = \mathfrak{B}_\delta$.

On the other hand, we can see that $(\mathfrak{F} \cup \mathfrak{G})_\sigma$ is exactly $\mathfrak{B}_\delta$. Because, in view of Theorem 6.6, $\mathfrak{B}_\sigma$, the class of *countable* unions of $\mathfrak{B}$-sets, is exactly $(\mathfrak{F}\dot{\cap}\mathfrak{G})_\sigma$. The remark we want to make then follows by taking complements.

Now let S be an arbitrary $\mathfrak{B}_\delta$-set. We can write:

$$S = \bigcap_{n=0}^{\infty} (\{x \mid f_n(x) = 0\} \cup \{x \mid g_n(x) = 0\}),$$

where $f_n, g_n : \mathbf{P}\omega \to \{\bot, 0, \top\}$ are continuous. Now let u, v be continuous functions which on $\{\bot, 0, \top\}$ realize these two tables:

u	$\bot$	0	$\top$
$\bot$	$\bot$	0	0
0	0	0	$0'$
$\top$	0	$0'$	$0'$

v	$\bot$	0	$\top$
$\bot$	0	0	$0'$
0	0	0	$0'$
$\top$	$0'$	$0'$	$\top$

where $0' = 0 \cup \bot$. This is an exercise in many-valued logic, and we find for $x, y \in \{\bot, 0, \top\}$:

$$u(x)(y) = v(x)(y) \quad \text{iff} \quad x = 0 \text{ or } y = 0.$$

Thus define continuous functions f' and g' such

$$f' = \lambda x \lambda n \in \omega . u(f_n(x))(g_n(x)),$$
$$g' = \lambda x \lambda n \in \omega . v(f_n(x))(g_n(x)),$$

and we find:

$$S = \{x \mid f'(x) = g'(x)\}$$

as desired.

This is as far as we can go with *equations*. More complicated sets can be defined using *quantifiers*, for example the Σ^1_1 or *analytic* sets can be put in the form:

$$\{x \mid \exists y . f(x)(y) = g(x)(y)\},$$

and their complements, the Π^1_1 sets, in the form

$$\{x \mid \forall y \exists z . h(x)(y)(z) = 0\},$$

with continuous f, g, h. For the three classes we then have as "typical" sets those shown in Table 3.

It should be remarked that $\mathfrak{B}_\delta$ contains all the closed sets in the *Cantor space* topology on $\mathbf{P}\omega$ (that is, the topology obtained when it is regarded as the infinite product of *discrete* two-point spaces). Therefore the Σ^1_1 sets for the two topologies on $\mathbf{P}\omega$ are the *same*. Hence, since we know for Cantor space that $\Delta^1_1 = \Sigma^1_1 \cap \Pi^1_1$ is the class of *Borel sets*, we can conclude that the two topologies on $\mathbf{P}\omega$ have the *same* Borel sets. (That is, in both cases Δ^1_1 is the Boolean σ-algebra generated from the open sets.)

TABLE 3 *Classes and typical sets*

Classes	Typical sets
$\mathfrak{G}$	$\{x \mid 0 \in x\}$
$\mathfrak{F}$	$\{\bot\}$

Classes	Typical sets
$\mathfrak{G}_\delta$	$\{\top\}$
$\mathfrak{F}\dot{\cap}\mathfrak{G}$	$\{0\}$
$\mathfrak{F}\dot{\cap}\mathfrak{G}_\delta$	$\{\top + 1\}$
$\mathfrak{B}_\delta$	$\{u \mid u_0 = u_1\}$
Σ^1_1	$\{u \mid \exists y.\, u_0(y) = u_1(y)\}$
Π^1_1	$\{u \mid \forall y \exists z.\, u(y)(z) = 0\}$

Returning now to the example involving trees mentioned at the beginning of this section, we see that the set of perfect (finite) trees can be written in the form:

$$\{x \mid x = \mathbf{tree}(x),\, \mathbf{perf}(x) = 0\} = \{x \mid \langle x,\, \mathbf{perf}(x)\rangle = \langle \mathbf{tree}(x),\, 0\rangle\};$$

thus it is a $\mathfrak{B}_\delta$-set. (Note that $\mathfrak{B}_\delta$ are obviously closed under finite intersection by the ordered pair method just illustrated; that they are closed under finite union is a little messier to make explicit, but the essential idea is contained in the proof of Theorem 6.7.)

As another example, we might wish to allow infinite trees but not the strange tree $\top$. Consider the following function:

$$(6.4) \quad \mathbf{top} = \lambda u : \mathbf{tree}.\, \mathbf{which}(u) \sqsubseteq \bot,\, \mathbf{top}(\mathbf{fst}(\mathbf{out}(u))) \cup \mathbf{top}(\mathbf{snd}(\mathbf{out}(u))).$$

We can show that $\mathbf{top} : \mathbf{P}\omega \to \{\bot, \top\}$. For a tree u the equation $\mathbf{top}(u) = \bot$ means that it *does not* contain $\top$, or as we might say: it is *topless*. The topless trees form a closed subset of the subspace of trees. (An interesting retract is the function $\lambda u.\, \mathbf{tree}(u) \cup \mathbf{top}(u)$ whose range consists exactly of the topless trees plus *one* exceptional tree $\top$.) Such a closed subset of (the range of) a retract is a kind of *semilattice*. (We shall not introduce a precise definition here.) Every directed subset has a limit (least upper bound) and every pair with an upper bound has a least upper bound. But generally least upper bounds do not have to exist within the semilattice. The type of domains that interest us *become* continuous lattices with the *addition* of a top element $\top$ larger than all the other elements. The elimination of $\top$ is done with a function like $\mathbf{top}$ of our example. This is convincing evidence to the author that an independent theory of semilattices is quite unnecessary: they can all be *derived* from lattices. The problem is simply to define the top-cutting operation, then restriction to the "topless" elements is indicated by an equation (like $\mathbf{top}(u) = \bot$). In this way all the constructions are kept within the control of a smooth-running theory based on **LAMBDA**. This point seems to be important if one wants to keep track of which functions are computable.

An aspect of the problem of classification treated in this section which has not been given close enough attention is the explicitly constructive way of verifying the closure properties of the classes. Consider the class $\mathfrak{B}_\delta$, for example. Let B be the typical set as shown in Table 3. Then whatever $f \in \mathbf{P}\omega$ we choose, the set

$$\{x \mid f(x) \in B\}$$

is a $\mathfrak{B}_\delta$-set and every such set has this form. Thus the f's *index* the elements of the class. Suppose $f, g \in \mathbf{P}\omega$. What we should look for are two LAMBDA-definable combinators such that $\mathbf{union}(f)(g)$ and $\mathbf{inter}(f)(g)$ give the functions that index the union and intersection of the sets determined by f and g. That is, we want:

$$\{x \mid \mathbf{union}(f)(g)(x) \in B\} = \{x \mid f(x) \in B\} \cup \{x \mid g(x) \in B\}.$$

It should be possible to extract the precise definition from the outline of the proofs given above, but in general this matter needs more investigation. There may very well be certain classes where such operations are not constructive, even though the classes are simply defined.

Theorem (`theorem_6_7.of_equalizer`). Every equalizer $\{x \mid f(x) = g(x)\}$ of Scott-continuous maps is a $\mathfrak{B}_\delta$.

Proof. For each n, the set where n belongs to both values or to neither is a Boolean combination of open fibres; the equalizer is their countable intersection. ■

Theorem (`theorem_6_7.iInter_equalizer`). A countable family of continuous equalizers $\{x \mid \forall n.\, f_n(x) = g_n(x)\}$ is itself a single equalizer of continuous maps.

Proof. Pair-index the two sequences; the packed values agree precisely when every fibre agrees. ■

Theorem (`theorem_6_7.converse_of_equalizers`). If $U = \{x \mid \forall n.\, f_n(x) = g_n(x)\}$ for continuous f_n, g_n, then U is an equalizer of two continuous maps.

Proof. Apply the previous packing. ■

Theorem (`theorem_6_7.boolean_as_iInter_open_union_closed`). Every Boolean combination of opens is a countable intersection of sets of the form $O_n \cup C_n$ with O_n open and C_n closed.

Proof. By Theorem 6.6 the complement is a continuous fibre of a finite set E of finite values; induct on E, slicing each finite value as the intersection of an open upper set and a closed lower set, and reindexing the accumulating intersection. ■

Theorem (`theorem_6_7.of_bdelta`). Every $\mathfrak{B}_\delta$ is an equalizer of two Scott-continuous maps.

Proof. Expand each Boolean factor by the previous theorem, reindex the double sequence by pairing, pack open and closed characteristics with the three-valued tables U and V so that equalizers of the packed sequence recover the intersection, and collapse that sequence of equalizers to one equation. ■

Theorem (`theorem_6_7`). A subset $U \subseteq \mathbf{P}\omega$ is a $\mathfrak{B}_\delta$ if and only if $U = \{x \mid f(x) = g(x)\}$ for some Scott-continuous $f, g : \mathbf{P}\omega \to \mathbf{P}\omega$.

Proof. The two directions are the equalizer and $\mathfrak{B}_\delta$ tools above. ■

`theorem_6_7.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Classification.Classes
public import DomainTheory.DataTypesAsLattices.Classification.ThreeValued
import DomainTheory.DataTypesAsLattices.Classification.CharacteristicMaps
import DomainTheory.DataTypesAsLattices.Classification.pairIndexed
import DomainTheory.DataTypesAsLattices.Classification.theorem_6_6
import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_3
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

namespace theorem_6_7

theorem of_equalizer :
```

```
    ∀ U, (∃ f g, IsScottContinuous f ∧ IsScottContinuous g ∧
        U = {x | f x = g x}) → IsBdelta U := by
  rintro U ⟨f, g, hf, hg, rfl⟩
  refine ⟨fun n => {x | n ∈ f x ∧ n ∈ g x} ∪ {x | n ∈ f x ∧ n ∈ g x}, ?_, ?_⟩
  · intro n
    refine (IsBooleanOpen.ofOpen
      (IsScottOpen.inter (IsScottContinuous.mem_preimage hf n)
        (IsScottContinuous.mem_preimage hg n))).union
      (IsBooleanOpen.of_closed ?_)
    have : {x | n ∈ f x ∧ n ∈ g x}ᶜ = {x | n ∈ f x}ᶜ ∪ {x | n ∈ g x}ᶜ := by
      ext x
      constructor
      · intro hx
        have : ¬ (n ∈ f x ∧ n ∈ g x) := hx
        by_cases hfx : n ∈ f x
        · exact Or.inl hfx
        · by_cases hgx : n ∈ g x
          · exact Or.inr hgx
          · exact (this ⟨hfx, hgx⟩).elim
      · intro hx h
        rcases hx with hf' | hg'
        · exact h.1 hf'
        · exact h.2 hg'
    rw [this]
    exact IsScottOpen.union (IsScottContinuous.mem_preimage hf n)
      (IsScottContinuous.mem_preimage hg n)
  · ext x
    constructor
    · intro h
      refine Set.mem_iInter.mpr fun n => ?_
      have heq : f x = g x := h
      by_cases hn : n ∈ f x
      · exact Or.inl ⟨hn, by rwa [← heq]⟩
      · exact Or.inr ⟨hn, by simpa [heq] using hn⟩
    · intro hx
      ext n
      have hn := Set.mem_iInter.mp hx n
      constructor
      · intro hfx
        rcases hn with ⟨_, hng⟩ | ⟨hnf, _⟩
        · exact hng
        · exact (hnf hfx).elim
      · intro hgx
        rcases hn with ⟨hnf, _⟩ | ⟨_, hng⟩
        · exact hnf
        · exact (hng hgx).elim

theorem iInter_equalizer (f g : ℕ → Pomega → Pomega)
    (hf : ∀ n, IsScottContinuous (f n)) (hg : ∀ n, IsScottContinuous (g n)) :
    ∃ F G, IsScottContinuous F ∧ IsScottContinuous G ∧
      {x | ∀ n, f n x = g n x} = {x | F x = G x} :=
  ⟨pairIndexed f, pairIndexed g,
    pairIndexed.isScottContinuous f hf, pairIndexed.isScottContinuous g hg, by
    ext x
    constructor
    · intro h
```

```
      ext k
      constructor
      · intro ⟨n, m, hk, hm⟩
        exact ⟨n, m, hk, by rwa [← h n]⟩
      · intro ⟨n, m, hk, hm⟩
        exact ⟨n, m, hk, by rwa [h n]⟩
    · intro h n
      ext m
      constructor
      · intro hm
        have : pair n m ∈ pairIndexed g x := by
          have : pair n m ∈ pairIndexed f x := ⟨n, m, rfl, hm⟩
          rwa [h] at this
        obtain ⟨n', m', heq, hm'⟩ := this
        obtain ⟨rfl, rfl⟩ := pair_inj heq
        exact hm'
      · intro hm
        have : pair n m ∈ pairIndexed f x := by
          have : pair n m ∈ pairIndexed g x := ⟨n, m, rfl, hm⟩
          rwa [← h] at this
        obtain ⟨n', m', heq, hm'⟩ := this
        obtain ⟨rfl, rfl⟩ := pair_inj heq
        exact hm'⟩

theorem converse_of_equalizers (f g : ℕ → Pomega → Pomega)
    (hf : ∀ n, IsScottContinuous (f n)) (hg : ∀ n, IsScottContinuous (g n))
    {U : Set Pomega} (hU : U = {x | ∀ n, f n x = g n x}) :
    ∃ F G, IsScottContinuous F ∧ IsScottContinuous G ∧ U = {x | F x = G x} := by
  obtain ⟨F, G, hF, hG, h⟩ := iInter_equalizer f g hf hg
  exact ⟨F, G, hF, hG, hU.trans h⟩

theorem boolean_as_iInter_open_union_closed {U : Set Pomega}
    (hU : IsBooleanOpen U) :
    ∃ (O C : ℕ → Set Pomega),
      (∀ n, IsScottOpen (O n)) ∧ (∀ n, IsScottOpen (C n)?) ∧
        U = ⋂ n, O n ∪ C n := by
  have hUc : U? ∈ ScottB := hU.compl
  obtain ⟨f, hf, E, hE, hEfin, hEeq⟩ := (theorem_6_6 U?).mp hUc
  have hrec : ∀ {S : Set Pomega} (hS : S.Finite),
      (∀ e ∈ S, e.Finite) →
      ∃ O C : ℕ → Set Pomega,
        (∀ n, IsScottOpen (O n)) ∧ (∀ n, IsScottOpen (C n)?) ∧
          {x | f x ∈ S} = ⋂ n, O n ∪ C n := by
    intro S hS
    induction S, hS using Set.Finite.induction_on with
    | empty =>
      intro
      refine ⟨fun _ => Set.univ, fun _ => ∅, fun _ => IsScottOpen.univ,
        fun _ => by rw [Set.compl_empty]; exact IsScottOpen.univ, ?_⟩
      ext x
      simp
    | insert ha hs ih =>
      intro hfin
      rename_i a s
      obtain ⟨Os, Cs, hOs, hCs, hseq⟩ :=
        ih fun e he => hfin e (Set.mem_insert_of_mem a he)
```

```
      have haFin : a.Finite := hfin a (Set.mem_insert a s)
      obtain ⟨hslice, hOa, hCa⟩ := IsScottContinuous.ne_eq_open_union_closed hf haFin
      refine ⟨fun n => match n with
        | 0 => {x | ¬ f x ⊆ a}
        | _n + 1 => Os _n,
        fun n => match n with
        | 0 => {x | ¬ a ⊆ f x}
        | _n + 1 => Cs _n, ?_, ?_, ?_⟩
      · intro n
        cases n with
        | zero => exact hOa
        | succ n => exact hOs n
      · intro n
        cases n with
        | zero => exact hCa
        | succ n => exact hCs n
      · have hUeq : {x | f x ∈ insert a s} =
            ({x | f x = a} ∩ {x | f x ∈ s}) := by
          ext x
          simp [Set.mem_insert_iff]
        rw [hUeq, hslice, hseq]
        ext x
        constructor
        · intro ⟨ha', hs'⟩
          refine Set.mem_iInter.mpr fun n => ?_
          cases n with
          | zero => exact ha'
          | succ n => exact Set.mem_iInter.mp hs' n
        · intro hx
          exact ⟨Set.mem_iInter.mp hx 0,
            Set.mem_iInter.mpr fun n => Set.mem_iInter.mp hx (n + 1)⟩
  obtain ⟨O, C, hO, hC, hOC⟩ := hrec hE hEfin
  refine ⟨O, C, hO, hC, ?_⟩
  have hUeq : U = {x | f x ∈ E} := by
    ext x
    constructor
    · intro hxU hfxE
      have hxUc : x ∈ U? := by
        rw [hEeq]
        exact hfxE
      exact hxUc hxU
    · intro hx
      by_contra hxU
      apply hx
      change x ∈ {x | f x ∈ E}
      rwa [← hEeq]
  rw [hUeq, hOC]

theorem of_bdelta {U : Set Pomega} (hU : IsBdelta U) :
    ∃ f g, IsScottContinuous f ∧ IsScottContinuous g ∧ U = {x | f x = g x} := by
  obtain ⟨Bs, hB, rfl⟩ := hU
  have hslice : ∀ n, ∃ O C : ℕ → Set Pomega,
      (∀ k, IsScottOpen (O k)) ∧ (∀ k, IsScottOpen (C k)?) ∧
        Bs n = ⋂ k, O k ∪ C k :=
    fun n => boolean_as_iInter_open_union_closed (hB n)
  choose Os Cs hOs hCs hEq using hslice
```

```
  let O (m : ℕ) : Set Pomega := Os (unpair m).1 (unpair m).2
  let C (m : ℕ) : Set Pomega := Cs (unpair m).1 (unpair m).2
  have hO : ∀ m, IsScottOpen (O m) := fun m => hOs (unpair m).1 (unpair m).2
  have hC : ∀ m, IsScottOpen (C m)? := fun m => hCs (unpair m).1 (unpair m).2
  have hUC : (⋂ n, Bs n) = ⋂ m, O m ∪ C m := by
    ext x
    constructor
    · intro hx
      refine Set.mem_iInter.mpr fun m => ?_
      have hx' := Set.mem_iInter.mp hx (unpair m).1
      rw [hEq] at hx'
      exact Set.mem_iInter.mp hx' (unpair m).2
    · intro hx
      refine Set.mem_iInter.mpr fun n => ?_
      rw [hEq]
      refine Set.mem_iInter.mpr fun k => ?_
      simpa [O, C, unpair_pair] using Set.mem_iInter.mp hx (pair n k)
  let f : ℕ → Pomega → Pomega := fun m x => charOpen (O m) x
  let g : ℕ → Pomega → Pomega := fun m x => closedToZero (C m) x
  have hf : ∀ m, IsScottContinuous (f m) :=
    fun m => charOpen.isScottContinuous (O m)
  have hg : ∀ m, IsScottContinuous (g m) :=
    fun m => closedToZero.isScottContinuous (C m)
  let F : ℕ → Pomega → Pomega := fun m x => uvU (f m x) (g m x)
  let G : ℕ → Pomega → Pomega := fun m x => uvV (f m x) (g m x)
  have hF : ∀ m, IsScottContinuous (F m) :=
    fun m => theorem_1_3.tuple (uvU.isScottContinuous_left) (uvU.
    isScottContinuous_right)
      (hf m) (hg m)
  have hG : ∀ m, IsScottContinuous (G m) :=
    fun m => theorem_1_3.tuple (uvV.isScottContinuous_left) (uvV.
    isScottContinuous_right)
      (hf m) (hg m)
  have hpack : (⋂ n, Bs n) = {x | ∀ m, F m x = G m x} := by
    rw [hUC]
    ext x
    constructor
    · intro hx m
      have hx' := Set.mem_iInter.mp hx m
      have hfg : f m x = ofNat 0 ∨ g m x = ofNat 0 := by
        rcases hx' with hOm | hCm
        · exact Or.inl ((charOpen.eq_zero (hO m) x).mpr hOm)
        · exact Or.inr ((closedToZero.eq_zero (hC m) x).mpr hCm)
      exact (ThreeValued.uvU_eq_uvV (charOpen.threeValued (O m) x)
        (closedToZero.threeValued (hC m) x)).mpr hfg
    · intro hx
      refine Set.mem_iInter.mpr fun m => ?_
      have heq := (ThreeValued.uvU_eq_uvV (charOpen.threeValued (O m) x)
        (closedToZero.threeValued (hC m) x)).mp (hx m)
      rcases heq with hf0 | hg0
      · exact Or.inl ((charOpen.eq_zero (hO m) x).mp hf0)
      · exact Or.inr ((closedToZero.eq_zero (hC m) x).mp hg0)
  exact converse_of_equalizers F G hF hG hpack

end theorem_6_7
```

```
theorem theorem_6_7 :
    ∀ U, IsBdelta U ↔
      ∃ f g, IsScottContinuous f ∧ IsScottContinuous g ∧
        U = {x | f x = g x} :=
  fun U => ⟨theorem_6_7.of_bdelta, theorem_6_7.of_equalizer U⟩

end DomainTheory.DataTypesAsLattices
```

2.8 Total functions and functionality

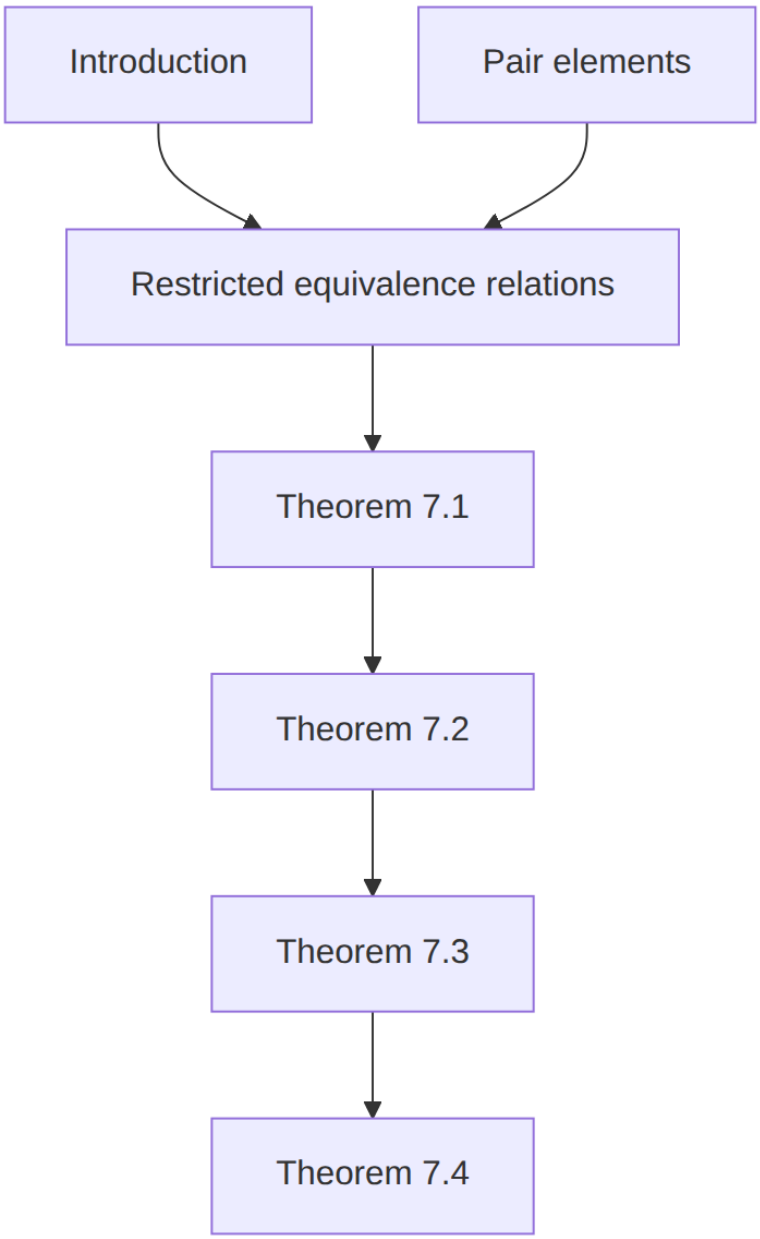

Figure 37: Total functions and functionality.

2.8.1 Introduction ✓

There is an inevitable conflict between the concepts of *total* and *partial* functions: we desire the former, but it is the latter we usually get. Total functions are better because they are "well-defined" at all their arguments, but the rub is that there is no general way of deciding when a *definition* is going to be well-defined in all its

uses. In analysis we have singularities, and in recursion theory we have endless, nonfinishing computations. In the present theory we have in effect evaded the question in two ways. First we have embraced the partial function as the norm. But secondly, and possibly confusingly, the multiple-valued functions are normal, total functions from $\mathbf{P}\omega$ into $\mathbf{P}\omega$. The point, of course, is that we are making a *model* of the partial functions in terms of ordinary mathematical functions. But note that the success of the *model* lies in *not* using arbitrary functions: it is only the continuous functions that correspond to the kind of partial functions we wanted to study. It would be a mistake to think of the variables in λ-calculus as ranging over arbitrary functions—and this mistake was made by both Church and Curry. The fixed-point operator $\mathbf{Y}$ shows that we must restrict attention to functions which do have fixed points. It is certainly the case that $\mathbf{P}\omega$ is not the only model for the λ-calculus, but it is a very satisfactory model and is rich enough to illustrate what can and what cannot be done with partial functions.

Historical note. Functionality had long been studied in combinatory logic. Hindley, Lercher, and Seldin (1972) is the introduction Scott used. This section is his reading of that theory in $\mathbf{P}\omega$. The connection with the functional interpretation of intuitionistic logic goes back to Curry and Kleene, and Theorem 7.3 is the standard result of that interpretation. Theorem 7.4, that the obvious typing characterizes the iterators, is due to Gordon Plotkin.

Whatever the pleasures of partial functions (and the multiple-valued ones, too), the desire for total functions remains. Take the integers. We are more interested in ω than $\omega \cup \{\bot, \top\}$. Since the multiple values $\bot$ and $\top$ are but two in number, it is easy to avoid them. The problem becomes tiresome in considering functions, however. The lattice represented by the retract $\mathbf{int}\circ \to \mathbf{int}$ is much too large, in that there are as many nontotal functions in this domain as total ones. The aim of the present section is to introduce an interpretation of a theory of functionality in the model $\mathbf{P}\omega$ that provides a convenient way of restricting attention to the functions (or other objects) that are total in the desired sense. The theory of functionality is rather like proposals of Curry, but not quite the same for important reasons as we will see.

In the theory of retracts of §§ 5 and 6, the plan of "restricting attention" was the very simple one of restricting to a *subset*. It was made notationally simple as the subsets in question could be parameterized by continuous functions. The retraction mappings stand in for their ranges. Even better, certain continuous functions act on these retractions as space-forming functors (such as $\oplus$ and $\circ \to$), which gives greater notational simplicity because one language is able to serve for several

tasks. When we pass to the theory of total functions, this same kind of simplicity is no longer possible owing to an increase in quantifier complexity in the necessary definitions. (This remark is made definite below.) Another point where there is some loss of simplicity concerns the representation of entities in $\mathbf{P}\omega$: subsets will no longer be enough, since we will need *quotients* of subsets. This is not a very startling point. Many constructions are affected in a natural way via equivalence classes. An equivalence relation makes you blind to certain distinctions. It may be easier also to remain a bit blind than to search for the most beautiful representative of an equivalence class: there may be nothing to choose between several candidates, and it can cost too much effort to attempt a choice. Thus our first agreement is that for many purposes a *kind* of object can be taken as a set of equivalence classes for an equivalence relation on a subset of $\mathbf{P}\omega$.

Because $\mathbf{P}\omega$ is closed under the pairing function $\lambda x \lambda y.\, \langle x, y\rangle$, we shall construe relations on subsets of $\mathbf{P}\omega$ as subsets of $\mathbf{P}\omega$ all of whose elements are ordered pairs. That is, a relation A satisfies this inclusion:

$$(7.1) \quad A \subseteq \{\langle x, y\rangle \mid x, y \in \mathbf{P}\omega\}.$$

2.8.2 Pair elements ✓

Ordered pairs of elements of $\mathbf{P}\omega$, as length-2 sequences.

Definition (`pairElem`). $\langle x, y\rangle = \mathrm{seq}_2(x, y)$.

Theorem (`pairElem.tag_ne`). $\langle 0, x\rangle \neq \langle 1, y\rangle$.

Proof. Distinct tags on length-2 sequences. ■

Theorem (`pairElem.eq_pairSeq`). $\langle x, y\rangle$ agrees with the retract pairing $\mathrm{pairSeq}(x, y)$.

Proof. Both are $\mathrm{seq}_2(x, y)$. ■

Theorem (`pairElem.fst`). $\langle x, y\rangle_0 = x$.

Proof. The zero coordinate of a length-2 sequence. ■

Theorem (`pairElem.snd`). $\langle x, y\rangle_1 = y$.

Proof. The one coordinate of a length-2 sequence. ■

Theorem (`pairElem.inj`). If $\langle x, y\rangle = \langle x', y'\rangle$, then $x = x'$ and $y = y'$.

Proof. Project both sides with the first and second coordinates. ■

pairElem.lean

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.pairSeq
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def pairElem (x y : Pomega) : Pomega := seq2 x y

namespace pairElem

theorem tag_ne (x y : Pomega) :
    pairElem (ofNat 0) x = pairElem (ofNat 1) y :=
  seq2.tag_ne x y

theorem eq_pairSeq (x y : Pomega) : pairElem x y = pairSeq x y := rfl

theorem fst (x y : Pomega) : funOf (pairElem x y) (ofNat 0) = x :=
  seq2.zero x y

theorem snd (x y : Pomega) : funOf (pairElem x y) (ofNat 1) = y :=
  seq2.one x y

theorem inj {x y x' y' : Pomega} (h : pairElem x y = pairElem x' y') :
    x = x' ∧ y = y' := by
  constructor
  · have := congrArg (fun w => funOf w (ofNat 0)) h
    rw [fst, fst] at this
    exact this
  · have := congrArg (fun w => funOf w (ofNat 1)) h
    rw [snd, snd] at this
    exact this

end pairElem

end DomainTheory.DataTypesAsLattices
```

2.8.3 Restricted equivalence relations ✓

DEFINITION. A (restricted) *equivalence relation* on $\mathbf{P}\omega$ is a symmetric and transitive relation on $\mathbf{P}\omega$.

Such relations are restricted because they are only reflexive on their domains—which are the same as their ranges—and these are the subsets with which the relations are concerned. We shall write $x\,A\,y$ for $\langle x, y\rangle \in A$ and $x : A$ for $x\,A\,x$. What we assume about these relations is the following:

$$(7.2) \quad x\,A\,y \text{ implies } y\,A\,x.$$

$$(7.3) \quad x\,A\,y \text{ and } y\,A\,z \text{ imply } x\,A\,z.$$

In case a is a retract, we introduce an equivalence relation to correspond:

$$(7.4) \quad E_a = \{\langle x, x\rangle \mid x : a\}.$$

This is the identity relation restricted to the range of a. Such relations (for obvious reasons) and many others satisfy an additional *intersection property*:

$$(7.5) \quad x\,A\,y \text{ and } x\,A\,z \text{ imply } x\,A\,(y \cap z).$$

We shall not generally assume (7.5) in this short discussion, but it is often convenient.

Each equivalence relation represents a *space*: the space of all its equivalence classes. Such spaces form a category more extensive than the category of retracts studied above. The familiar functors can be extended to this larger category by these definitions:

$$(7.6) \quad A \to B = \{\langle \lambda x.\, u(x), \lambda x.\, v(x)\rangle \mid u(x)\,B\,v(y) \text{ whenever } x\,A\,y\},$$

$$(7.7) \quad A \times B = \{\langle \langle x, x'\rangle, \langle y, y'\rangle\rangle \mid x\,A\,y \text{ and } x'\,B\,y'\},$$

$$(7.8) \quad A + B = \{\langle \langle 0, x\rangle, \langle 0, y\rangle\rangle \mid x\,A\,y\} \cup \{\langle \langle 1, x'\rangle, \langle 1, y'\rangle\rangle \mid x'\,B\,y'\}.$$

Formalization. Restricted equivalences are packaged as a structure with a binary relation that is symmetric and transitive. Membership $x : A$ is reflexivity $x\,A\,x$. The retract identity E_a, the functors (7.6)–(7.8), and the empty and singleton equivalences are the constructions below; symmetry and transitivity of each are part of the definition.

Definition (`RestrictedEquiv`). A restricted equivalence is a relation A on $\mathbf{P}\omega$ satisfying (7.2) and (7.3).

Definition (`RestrictedEquiv.mem`). $x : A$ means $x\,A\,x$.

Definition (`RestrictedEquiv.Ea`). E_a relates x to y just when $x : a$, $y : a$, and $x = y$.

Definition (`RestrictedEquiv.arrowE`). $A \to B$ relates f to g when both are graphs of their own application and $x\,A\,y$ implies $f(x)\,B\,g(y)$.

Definition (`RestrictedEquiv.prodE`). $A \times B$ relates u to v when both are pairs of their projections and the projections are related in A and in B respectively.

Definition (`RestrictedEquiv.sumE`). $A + B$ relates u to v when both are left injections whose payloads are related in A, or both are right injections whose payloads are related in B.

Definition (`RestrictedEquiv.emptyE`). The empty restricted equivalence relates nothing.

Definition (`RestrictedEquiv.singletonE`). The singleton on a relates x to y just when $x = y = a$.

Theorem (`singletonE.mem`). x is a member of the singleton on a if and only if $x = a$.

Proof. Unfold membership as $x\,A\,x$. ■

Definition (`RestrictedEquiv.Nk`). N_k relates x to y when $x = y = \overline{n}$ for some $n < k$.

Definition (`RestrictedEquiv.Nrel`). N relates x to y when $x = y = \overline{n}$ for some $n \in \omega$.

Definition (`RestrictedEquiv.kerE`). The kernel of a relates x to y when $a(x) = a(y)$.

Theorem (`kerE.repr`). If a is a retract, then x is kernel-related to $a(x)$.

Proof. Retract-fixedness gives $a(a(x)) = a(x)$. ■

Definition (`iterateE`). The iterate equivalence at f and x relates u to v when $u = v = Z(n, f, x)$ for some n.

RestrictedEquiv.lean

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.typed
public import DomainTheory.DataTypesAsLattices.Retracts.Retract
public import DomainTheory.DataTypesAsLattices.Functionality.pairElem
import DomainTheory.DataTypesAsLattices.Retracts.retract_app

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

structure RestrictedEquiv where
  rel : Pomega → Pomega → Prop
  symm : ∀ {x y}, rel x y → rel y x
  trans : ∀ {x y z}, rel x y → rel y z → rel x z

namespace RestrictedEquiv

def mem (A : RestrictedEquiv) (x : Pomega) : Prop :=
  A.rel x x

def Ea (a : Pomega) : RestrictedEquiv where
  rel := fun x y => typed x a ∧ typed y a ∧ x = y
  symm := by
    intro x y ⟨hx, hy, h⟩
    exact ⟨hy, hx, h.symm⟩
  trans := by
    intro x y z ⟨hx, hy, hxy⟩ ⟨_, hz, hyz⟩
    exact ⟨hx, hz, hxy.trans hyz⟩

def arrowE (A B : RestrictedEquiv) : RestrictedEquiv where
  rel := fun f g =>
    f = graph (fun x => funOf f x) ∧
      g = graph (fun x => funOf g x) ∧
        ∀ x y, A.rel x y → B.rel (funOf f x) (funOf g y)
  symm := by
    intro f g ⟨hf, hg, h⟩
    exact ⟨hg, hf, fun x y hxy => B.symm (h y x (A.symm hxy))⟩
  trans := by
    intro f g k ⟨hf, hg, hfg⟩ ⟨hg', hk, hgk⟩
```

```
    exact ⟨hf, hk, fun x y hxy =>
      B.trans (hfg x y hxy) (hgk y y (A.trans (A.symm hxy) hxy))⟩

def prodE (A B : RestrictedEquiv) : RestrictedEquiv where
  rel := fun u v =>
    u = pairElem (funOf u (ofNat 0)) (funOf u (ofNat 1)) ∧
      v = pairElem (funOf v (ofNat 0)) (funOf v (ofNat 1)) ∧
        A.rel (funOf u (ofNat 0)) (funOf v (ofNat 0)) ∧
          B.rel (funOf u (ofNat 1)) (funOf v (ofNat 1))
  symm := by
    intro u v ⟨hu, hv, h0, h1⟩
    exact ⟨hv, hu, A.symm h0, B.symm h1⟩
  trans := by
    intro u v w ⟨hu, hv, h0, h1⟩ ⟨hv', hw, k0, k1⟩
    exact ⟨hu, hw, A.trans h0 k0, B.trans h1 k1⟩

def sumE (A B : RestrictedEquiv) : RestrictedEquiv where
  rel := fun u v =>
    (u = pairElem (ofNat 0) (funOf u (ofNat 1)) ∧
        v = pairElem (ofNat 0) (funOf v (ofNat 1)) ∧
        A.rel (funOf u (ofNat 1)) (funOf v (ofNat 1))) ∨
      (u = pairElem (ofNat 1) (funOf u (ofNat 1)) ∧
        v = pairElem (ofNat 1) (funOf v (ofNat 1)) ∧
        B.rel (funOf u (ofNat 1)) (funOf v (ofNat 1)))
  symm := by
    intro u v h
    rcases h with ⟨hu, hv, hA⟩ | ⟨hu, hv, hB⟩
    · exact Or.inl ⟨hv, hu, A.symm hA⟩
    · exact Or.inr ⟨hv, hu, B.symm hB⟩
  trans := by
    intro u v w h1 h2
    rcases h1 with ⟨hu, hv, hA⟩ | ⟨hu, hv, hB⟩
    · rcases h2 with ⟨hv', hw, hA'⟩ | ⟨hv', hw, _⟩
      · exact Or.inl ⟨hu, hw, A.trans hA hA'⟩
      · exact (pairElem.tag_ne (funOf v (ofNat 1)) (funOf v (ofNat 1))
          (hv.symm.trans hv')).elim
    · rcases h2 with ⟨hv', hw, _⟩ | ⟨hv', hw, hB'⟩
      · exact (pairElem.tag_ne (funOf v (ofNat 1)) (funOf v (ofNat 1))
          (hv'.symm.trans hv)).elim
      · exact Or.inr ⟨hu, hw, B.trans hB hB'⟩

def emptyE : RestrictedEquiv where
  rel := fun _ _ => False
  symm := fun h => False.elim h
  trans := fun h _ => False.elim h

def singletonE (a : Pomega) : RestrictedEquiv where
  rel := fun x y => x = a ∧ y = a
  symm := by
    intro x y ⟨hx, hy⟩
    exact ⟨hy, hx⟩
  trans := by
    intro x y z ⟨hx, _hy⟩ ⟨_hy', hz⟩
    exact ⟨hx, hz⟩

def Nk (k : ℕ) : RestrictedEquiv where
```

```
  rel := fun x y => (∃ n < k, x = ofNat n) ∧ x = y
  symm := by
    intro x y ⟨hn, h⟩
    exact ⟨by rw [← h]; exact hn, h.symm⟩
  trans := by
    intro x y z ⟨hn, hxy⟩ ⟨_, hyz⟩
    exact ⟨hn, hxy.trans hyz⟩

def Nrel : RestrictedEquiv where
  rel := fun x y => (∃ n, x = ofNat n) ∧ x = y
  symm := by
    intro x y ⟨hn, h⟩
    exact ⟨by rw [← h]; exact hn, h.symm⟩
  trans := by
    intro x y z ⟨hn, hxy⟩ ⟨_, hyz⟩
    exact ⟨hn, hxy.trans hyz⟩

def kerE (a : Pomega) : RestrictedEquiv where
  rel := fun x y => funOf a x = funOf a y
  symm := by
    intro x y h
    exact h.symm
  trans := by
    intro x y z hxy hyz
    exact hxy.trans hyz

end RestrictedEquiv

export RestrictedEquiv (Ea arrowE prodE sumE emptyE singletonE Nk Nrel kerE)

namespace singletonE

theorem mem (a x : Pomega) : (singletonE a).mem x ↔ x = a :=
  ⟨fun h => h.1, fun hx => ⟨hx, hx⟩⟩

end singletonE

namespace kerE

theorem repr {a : Pomega} (ha : Retract a) (x : Pomega) :
    (kerE a).rel x (funOf a x) :=
  (retract_app ha x).symm

end kerE

end DomainTheory.DataTypesAsLattices
```

iterateE.lean

```
module

public import DomainTheory.DataTypesAsLattices.Enumeration.Zcomb

@[expose] public section
```

```
namespace DomainTheory.DataTypesAsLattices

def iterateE (f x : Pomega) : RestrictedEquiv where
  rel := fun u v => (∃ n, u = Z n f x) ∧ u = v
  symm := by
    intro u v ⟨hn, h⟩
    exact ⟨by rw [← h]; exact hn, h.symm⟩
  trans := by
    intro u v w ⟨hn, hxy⟩ ⟨_, hyz⟩
    exact ⟨hn, hxy.trans hyz⟩

end DomainTheory.DataTypesAsLattices
```

2.8.4 Theorem 7.1 ✓

THEOREM 7.1 (The closure theorem). *If A and B are restricted equivalence relations, then so are $A \to B$, $A \times B$ and $A + B$. We find:*

(i) $f : A \to B$ iff $f = \lambda x.\, f(x)$ and whenever $x\, A\, y$, then $f(x)\, B\, f(y)$, in particular:

(ii) if $f : A \to B$ and $x : A$, then $f(x) : B$; furthermore,

(iii) $u : A \times B$ iff $u = \langle u_0, u_1 \rangle$ and $u_0 : A$ and $u_1 : B$;

(iv) $u : A + B$ iff either $u = \langle 0, u_1 \rangle$ and $u_1 : A$ or $u = \langle 1, u_1 \rangle$ and $u_1 : B$.

It follows easily from (7.1) that the restricted equivalence relations form a Cartesian closed category which—in distinction to the category of retracts—has disjoint sums (or coproducts as they are usually called in category theory). This result is probably a special case of a more general theorem. The point is that $\mathbf{P}\omega$ itself is a space in a Cartesian closed category (that of continuous lattices and continuous maps) and it contains as subspaces the Boolean space and especially its own function space and Cartesian square. In this circumstance any such rich space must be such that its restricted equivalence relations again form a good category. Our construction is not strictly categorical in nature, as we have used the elements of $\mathbf{P}\omega$ and have relied on being able to form arbitrary subsets (arbitrary relations). But a more abstract formulation must be possible. The connection with the category of retracts is indicated in the next theorem.

Formalization. The closure theorem unpacks membership in $A \to B$, $A \times B$, and $A + B$ against the definitions of those functors. Symmetry and transitivity of the functors themselves are already part of those constructions.

Theorem (`theorem_7_1`). For restricted equivalences A and B: (i) $f : A \to B$ if and only if f equals the graph of its own application and $x\, A\, y$ implies $f(x)\, B\, f(y)$; (ii) if $f : A \to B$ and $x : A$, then $f(x) : B$; (iii) $u : A \times B$ if and only if $u = \langle u_0, u_1 \rangle$ with $u_0 : A$ and $u_1 : B$; (iv) $u : A + B$ if and only if $u = \langle 0, u_1 \rangle$ with $u_1 : A$, or $u = \langle 1, u_1 \rangle$ with $u_1 : B$.

Proof. Each clause is an unpacking of membership in the corresponding functor: for the arrow, the two graph conjuncts collapse under $f = g$; preservation on a related pair yields (ii) at $x\, A\, x$; for the product and sum, the paired projections (resp. common injection tag) reduce relatedness of two copies of u to membership of the components. ■

`theorem_7_1.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Functionality.RestrictedEquiv

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_7_1 (A B : RestrictedEquiv) :
    (∀ f, (arrowE A B).mem f ↔
        f = graph (fun x => funOf f x) ∧
          ∀ x y, A.rel x y → B.rel (funOf f x) (funOf f y)) ∧
      (∀ {f x}, (arrowE A B).mem f → A.mem x → B.mem (funOf f x)) ∧
      (∀ u, (prodE A B).mem u ↔
        u = pairElem (funOf u (ofNat 0)) (funOf u (ofNat 1)) ∧
          A.mem (funOf u (ofNat 0)) ∧ B.mem (funOf u (ofNat 1))) ∧
      (∀ u, (sumE A B).mem u ↔
        (u = pairElem (ofNat 0) (funOf u (ofNat 1)) ∧
          A.mem (funOf u (ofNat 1))) ∨
        (u = pairElem (ofNat 1) (funOf u (ofNat 1)) ∧
          B.mem (funOf u (ofNat 1)))) := by
  refine ⟨?_, ?_, ?_, ?_⟩
  · intro f
    constructor
    · intro hf
      exact ⟨hf.1, fun x y hxy => hf.2.2 x y hxy⟩
    · intro ⟨hf, hpres⟩
      exact ⟨hf, hf, hpres⟩
  · intro f x hf hx
    exact hf.2.2 x x hx
  · intro u
    constructor
    · intro hu
      exact ⟨hu.1, hu.2.2.1, hu.2.2.2⟩
    · intro ⟨hu, hA, hB⟩
      exact ⟨hu, hu, hA, hB⟩
  · intro u
    constructor
    · intro hu
      rcases hu with ⟨hu, _, hA⟩ | ⟨hu, _, hB⟩
      · exact Or.inl ⟨hu, hA⟩
      · exact Or.inr ⟨hu, hB⟩
    · intro h
      rcases h with ⟨hu, hA⟩ | ⟨hu, hB⟩
      · exact Or.inl ⟨hu, hu, hA⟩
      · exact Or.inr ⟨hu, hu, hB⟩

end DomainTheory.DataTypesAsLattices
```

2.8.5 Theorem 7.2 ✓

THEOREM 7.2 (The isomorphism theorem). *If a and b are retracts, we have the following isomorphisms and identities relating the spaces:*

(i) $E_a \cong \{\langle x, y\rangle \mid a(x) = a(y)\}$;

(ii) $E_{a\circ\to b} \cong E_a \to E_b$;

(iii) $E_{a\otimes b} = E_a \times E_b$;

(iv) $E_{a\oplus b} = E_a + E_b \cup \{\langle \bot, \bot\rangle, \langle \top, \top\rangle\}$.

Part (iv) is not categorical in nature as it stands, but (ii) and (iii) indicate that E is a functor from the category of retracts into the category of equivalence relations that shows that the former is a full sub-Cartesian-closed category of the latter. We cannot pursue the categorical questions here, but note that there are many subcategories that might be of interest; for example, the equivalence relations with the intersection property are closed under $\to$, $\times$, and $+$.

Returning to the question of total functions we introduce this notation:

$$(7.9) \quad N = \{\langle n, n\rangle \mid n \in \omega\}.$$

This is the type of the integers *without* $\bot$ and $\top$, i.e., the total integers. We note that:

$$(7.10) \quad N = \{u \mid u = \langle u_0, u_0\rangle,\ u_0 = \mathbf{int}(u_0),\ \mathbf{mid}(u_0) = 0\}.$$

Thus N is a $\mathfrak{B}_\delta$-set. What is $N \to N$? We see:

$$\{(7.11) \quad f : N \to N \text{ iff } f : \mathbf{fun} \text{ and } f(n) \in \omega \text{ whenever } n \in \omega.\}$$

This $N \to N$ is indeed the type of all total functions from ω into ω. It can be shown that $N \to N$ is also a $\mathfrak{B}_\delta$-set: good. But what is $(N \to N) \to N$? This is no longer a $\mathfrak{B}_\delta$-set, the best we can say is Π^1_1. By Theorem 7.1 it corresponds to the type of all

(extensional) *continuous* total functions from $N \to N$ into N. (The condition on A and B on the right side of (7.6) makes the concept of function embodied in $A \to B$ extensional, since the functions are meant to preserve the equivalence relations.)

A more precise discussion identifies $N \to N$ as a topological space, usually called the *Baire space*. If we introduce the finite discrete spaces by:

$$(7.12) \quad N_k = \{\langle n, n\rangle \mid n < k\},$$

then $N \to N_2$ can also be identified with a topological space, usually called the *Cantor space*. In this identification we find at the next type, say either $(N \to N) \to N$ or $(N \to N_2) \to N_2$, that elements correspond to the usual notion of continuous function defined in topological terms. However, these higher type spaces are not at all conveniently taken as *topological* spaces. Certain of them can be identified as *limit spaces* according to the work of Hyland, and for these $\to$, $\times$, and $+$ have the natural interpretation. We cannot enter into these details here, but we can remark that the higher type spaces become ever more complicated. Thus $((N \to N) \to N) \to N$ is a Π^1_2-set and each $\to$ will add another quantifier to the definition. This is reasonable, because to say that a function is total is to say that *all* its values are well-behaved. But if its domain is a complex space, this statement of totality is even more complex. Despite this complexity, however, it is possible to sort out what kind of mapping properties many functions have. We shall mention a few of the combinators.

Formalization. The isomorphism theorem relates the retract identity E_a to kernels, arrows, products, and sums. The packaging theorem assembles the four clauses for retracts a and b.

Theorem (`theorem_7_2.i`). $x\ E_a\ y$ if and only if $x : a$, $y : a$, and $x = y$.

Proof. Unfolding the definition of E_a. ■

Theorem (`theorem_7_2.i_iso`). If a is a retract, then $a(x) = a(y)$ if and only if $a(x)\ E_a\ a(y)$.

Proof. Both sides reduce to equality of the images once retract-fixedness supplies $a(x) : a$ and $a(y) : a$. ■

Theorem (`theorem_7_2.ii_of_typed`). If $f : a\circ \to b$, then $f : E_a \to E_b$.

Proof. Typing into the retract arrow rewrites f as a graph; relatedness in E_a is equality of a-typed points, and the retract arrow preserves typing into b. ■

Theorem (`theorem_7_2.ii`). For retracts a and b, typing into $a\circ \to b$ implies membership in $E_a \to E_b$; relatedness in $E_a \to E_b$ passes to relatedness of the retract-arrow applications in $E_{a\circ\to b}$ and conversely.

Proof. The forward typing clause is the previous theorem; the two directions between $E_a \to E_b$ and $E_{a\circ\to b}$ compare graph preservation on a-fixed arguments with equality after applying $a\circ \to b$. ■

Theorem (`theorem_7_2.iii`). On paired arguments, $E_{a\otimes b}$ agrees with $E_a \times E_b$.

Proof. Unpack tensor typing of a pair into component typings, or reassemble them. ■

Theorem (`theorem_7_2.iii_exact`). For arbitrary u and v, $u\ E_{a\otimes b}\ v$ if and only if $u\ (E_a \times E_b)\ v$.

Proof. Reduce via the product membership characterisation of Theorem 4.4 to the previous clause on pairs. ■

Theorem (`theorem_7_2.iv`). For retracts a and b, $u\ E_{a\oplus b}\ v$ if and only if $u\ (E_a + E_b)\ v$, or both are $\bot$, or both are $\top$.

Proof. Case on the sum typing of u: bottom, top, left injection, or right injection; the converse rebuilds sum typing from the sum equivalence or the two exceptional pairs. ■

Theorem (`theorem_7_2`). For retracts a and b, clauses (i)–(iv) of the isomorphism theorem hold.

Proof. Assemble the four preceding tools. ■

theorem_7_2.lean

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.arrowR
public import DomainTheory.DataTypesAsLattices.Retracts.tensorR
public import DomainTheory.DataTypesAsLattices.Retracts.plusR
public import DomainTheory.DataTypesAsLattices.Functionality.RestrictedEquiv

import DomainTheory.DataTypesAsLattices.Retracts.theorem_4_4
import DomainTheory.DataTypesAsLattices.Retracts.typed_more
import DomainTheory.DataTypesAsLattices.Retracts.arrowR_more
import DomainTheory.DataTypesAsLattices.Retracts.theorem_4_3_more
import DomainTheory.DataTypesAsLattices.Retracts.retract_app
import DomainTheory.DataTypesAsLattices.Enumeration.PairSeq
import DomainTheory.DataTypesAsLattices.Retracts.graphLemmas

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_7_2

theorem i (a x y : Pomega) :
    (Ea a).rel x y ↔ typed x a ∧ typed y a ∧ x = y :=
  Iff.rfl
```

```
theorem i_iso {a : Pomega} (ha : Retract a) (x y : Pomega) :
    funOf a x = funOf a y ↔ (Ea a).rel (funOf a x) (funOf a y) := by
  constructor
  · intro h
    refine ⟨?_, ?_, h⟩
    · exact (retract_app ha x).symm
    · exact (retract_app ha y).symm
  · intro h
    exact h.2.2

theorem ii_of_typed {a b f : Pomega} (hf : typed f (arrowR a b)) :
    (arrowE (Ea a) (Ea b)).mem f := by
  have hf' : f = comp b (comp f a) := by
    simpa [typed, arrowR.app] using hf
  have hgraph : f = graph (fun x => funOf f x) := by
    apply Eq.trans hf'
    apply graph_ext
    intro x
    have : funOf f x = funOf b (funOf f (funOf a x)) := by
      have h1 : funOf f x = funOf (comp b (comp f a)) x :=
        congrArg (fun w => funOf w x) hf'
      rw [h1, comp.app, comp.app]
    rw [comp.app, this]
  refine ⟨hgraph, hgraph, ?_⟩
  intro x y hxy
  rcases hxy with ⟨hx, hy, rfl⟩
  have hfx : typed (funOf f x) b := theorem_4_3.ii hf hx
  exact ⟨hfx, hfx, rfl⟩

theorem ii {a b : Pomega} (ha : Retract a) (hb : Retract b)
    (f g : Pomega) :
    (typed f (arrowR a b) → (arrowE (Ea a) (Ea b)).mem f) ∧
      ((arrowE (Ea a) (Ea b)).rel f g →
        (Ea (arrowR a b)).rel (funOf (arrowR a b) f) (funOf (arrowR a b) g)) ∧
      ((Ea (arrowR a b)).rel f g → (arrowE (Ea a) (Ea b)).rel f g) := by
  refine ⟨fun hf => ii_of_typed hf, ?_, ?_⟩
  · intro hfg
    rcases hfg with ⟨hfgraph, hggraph, hpres⟩
    have hftyped : typed (funOf (arrowR a b) f) (arrowR a b) :=
      (retract_app (arrowR.isRetract ha hb) f).symm
    have hgtyped : typed (funOf (arrowR a b) g) (arrowR a b) :=
      (retract_app (arrowR.isRetract ha hb) g).symm
    refine ⟨hftyped, hgtyped, ?_⟩
    rw [arrowR.app, arrowR.app]
    apply graph_ext
    intro x
    simp only [comp.app]
    have hax : typed (funOf a x) a := (retract_app ha x).symm
    have hsame := hpres (funOf a x) (funOf a x) ⟨hax, hax, rfl⟩
    have hfeq : funOf f (funOf a x) = funOf g (funOf a x) := hsame.2.2
    have hfb : typed (funOf f (funOf a x)) b := hsame.1
    have hgb : typed (funOf g (funOf a x)) b := hsame.2.1
    rw [← hfb, ← hgb, hfeq]
  · intro hfg
    rcases hfg with ⟨hf, hg, rfl⟩
```

```
    have hmem := ii_of_typed hf
    exact ⟨hmem.1, hmem.1, hmem.2.2⟩

theorem iii (a b x y x' y' : Pomega) :
    (Ea (tensorR a b)).rel (pairSeq x y) (pairSeq x' y') ↔
      (prodE (Ea a) (Ea b)).rel (pairSeq x y) (pairSeq x' y') := by
  constructor
  · intro ⟨hu, hv, heq⟩
    obtain ⟨rfl, rfl⟩ := PairSeq.inj heq
    have hxy : typed x a ∧ typed y b := (typed.pairSeq_tensorR a b x y).mp hu
    refine ⟨?_, ?_, ?_, ?_⟩
    · rw [PairSeq.app_zero, PairSeq.app_one]; rfl
    · rw [PairSeq.app_zero, PairSeq.app_one]; rfl
    · rw [PairSeq.app_zero]
      exact ⟨hxy.1, hxy.1, rfl⟩
    · rw [PairSeq.app_one]
      exact ⟨hxy.2, hxy.2, rfl⟩
  · intro ⟨_hu, _hv, h0, h1⟩
    rw [PairSeq.app_zero, PairSeq.app_zero] at h0
    rw [PairSeq.app_one, PairSeq.app_one] at h1
    rcases h0 with ⟨hx, hx', heqx⟩
    rcases h1 with ⟨hy, hy', heqy⟩
    refine ⟨(typed.pairSeq_tensorR a b x y).mpr ⟨hx, hy⟩,
      (typed.pairSeq_tensorR a b x' y').mpr ⟨hx', hy'⟩, ?_⟩
    rw [heqx, heqy]

theorem iii_exact (a b u v : Pomega) :
    (Ea (tensorR a b)).rel u v ↔ (prodE (Ea a) (Ea b)).rel u v := by
  constructor
  · intro huv
    rcases huv with ⟨hu, hv, rfl⟩
    rcases (theorem_4_4.typed_iff.mp hu) with ⟨hpair, ha, hb⟩
    refine ⟨hpair, hpair, ?_, ?_⟩
    · exact ⟨ha, ha, rfl⟩
    · exact ⟨hb, hb, rfl⟩
  · intro huv
    rcases huv with ⟨hu, hv, h0, h1⟩
    rcases h0 with ⟨hx, hx', heqx⟩
    rcases h1 with ⟨hy, hy', heqy⟩
    have huvEq : u = v := by
      rw [hu, hv, heqx, heqy]
    refine ⟨?_, ?_, huvEq⟩
    · exact theorem_4_4.typed_iff.mpr ⟨hu, hx, hy⟩
    · exact theorem_4_4.typed_iff.mpr ⟨hv, hx', hy'⟩

theorem iv {a b : Pomega} (ha : Retract a) (hb : Retract b)
    (u v : Pomega) :
    (Ea (plusR a b)).rel u v ↔
      (sumE (Ea a) (Ea b)).rel u v ∨
        (u = botElem ∧ v = botElem) ∨ (u = topElem ∧ v = topElem) := by
  constructor
  · intro huv
    rcases huv with ⟨hu, hv, huv⟩
    subst v
    rcases (plusR.typed_iff ha hb).mp hu with
      rfl | rfl | ⟨x, rfl, hx⟩ | ⟨y, rfl, hy⟩
```

```
    · exact Or.inr (Or.inl ⟨rfl, rfl⟩)
    · exact Or.inr (Or.inr ⟨rfl, rfl⟩)
    · exact Or.inl (Or.inl ⟨by rw [pairElem.eq_pairSeq, PairSeq.app_one],
          by rw [pairElem.eq_pairSeq, PairSeq.app_one],
          by simpa [PairSeq.app_one] using (show (Ea a).rel x x from ⟨hx, hx, rfl⟩)⟩)
    · exact Or.inl (Or.inr ⟨by rw [pairElem.eq_pairSeq, PairSeq.app_one],
          by rw [pairElem.eq_pairSeq, PairSeq.app_one],
          by simpa [PairSeq.app_one] using (show (Ea b).rel y y from ⟨hy, hy, rfl⟩)⟩)
  · intro h
    rcases h with h | ⟨rfl, rfl⟩ | ⟨rfl, rfl⟩
    rcases h with ⟨hu, hv, hA⟩ | ⟨hu, hv, hB⟩
    · rcases hA with ⟨hxt, hyt, heq⟩
      have heq' : u = v := by
        rw [hu, hv, heq]
      refine ⟨?_, ?_, heq'⟩
      · rw [hu]; exact plusR.typed_inl hxt
      · rw [hv]; exact plusR.typed_inl hyt
    · rcases hB with ⟨hxt, hyt, heq⟩
      have heq' : u = v := by
        rw [hu, hv, heq]
      refine ⟨?_, ?_, heq'⟩
      · rw [hu]; exact plusR.typed_inr hxt
      · rw [hv]; exact plusR.typed_inr hyt
    · exact ⟨plusR.typed_bot a b, plusR.typed_bot a b, rfl⟩
    · exact ⟨plusR.typed_top a b, plusR.typed_top a b, rfl⟩

end theorem_7_2

theorem theorem_7_2 {a b : Pomega} (ha : Retract a) (hb : Retract b) :
    (∀ x y, funOf a x = funOf a y ↔ (Ea a).rel (funOf a x) (funOf a y)) ∧
      (∀ f g, (typed f (arrowR a b) → (arrowE (Ea a) (Ea b)).mem f) ∧
        ((arrowE (Ea a) (Ea b)).rel f g →
          (Ea (arrowR a b)).rel (funOf (arrowR a b) f)
            (funOf (arrowR a b) g)) ∧
        ((Ea (arrowR a b)).rel f g → (arrowE (Ea a) (Ea b)).rel f g)) ∧
      (∀ u v, (Ea (tensorR a b)).rel u v ↔ (prodE (Ea a) (Ea b)).rel u v) ∧
      (∀ u v, (Ea (plusR a b)).rel u v ↔
        (sumE (Ea a) (Ea b)).rel u v ∨
          (u = botElem ∧ v = botElem) ∨ (u = topElem ∧ v = topElem)) :=
  ⟨fun x y => theorem_7_2.i_iso ha x y,
    fun f g => theorem_7_2.ii ha hb f g,
    theorem_7_2.iii_exact a b,
    theorem_7_2.iv ha hb⟩

end DomainTheory.DataTypesAsLattices
```

2.8.6 Theorem 7.3 ✓

THEOREM 7.3 (The functionality theorem). *The combinators* **I**, **K**, *and* **S** *enjoy the following functionality properties which hold for all equivalence relations A, B, C:*

(i) $\mathbf{I} : A \to A$;

(ii) $\mathbf{K} : A \to (B \to A)$;

(iii) $\mathbf{S} : (A \to (B \to C)) \to ((A \to B) \to (A \to C))$.

Furthermore, these combinators are uniquely determined by these properties.

Let us check that S satisfies (iii). Suppose that:

$$f\,(A \to (B \to C))\,f'.$$

We must show that:

$$\mathbf{S}(f)\,((A \to B) \to (A \to C))\,\mathbf{S}(f').$$

To this end suppose that:

$$g\,(A \to B)\,g'.$$

We must show that:

$$\mathbf{S}(f)(g)\,(A \to C)\,\mathbf{S}(f')(g').$$

To this end suppose that:

$$x\,A\,x'.$$

We must show that:

$$\mathbf{S}(f)(g)(x)\,C\,\mathbf{S}(f')(g')(x').$$

Now by definition of the combinator $\mathbf{S}$ we have:

$$\mathbf{S}(f)(g)(x) = f(x)(g(x)),$$

$$\mathbf{S}(f')(g')(x') = f'(x')(g'(x')).$$

By assumptions on g, g' and on x, x', we know:

$$g(x)\,B\,g'(x').$$

By assumptions on f, f' and on x, x', we know:

$$f(x)\,(B \to C)\,f'(x').$$

The desired conclusion now follows when we note such combinations as $\mathbf{S}(f)$ and $\mathbf{S}(f)(g)$ are indeed functions. (We are using Theorem 7.1(i) several times in this case.)

In the case of the converse, let us suppose by way of example that $k \in \mathbf{P}\omega$ is such that

$$k : A \to (B \to A)$$

holds for all equivalence relations A and B. By specializing to, say, the identity relation we see that whatever $a \in \mathbf{P}\omega$ we take, both k and $k(a)$ are functions. To establish that $k = \mathbf{K}$ we need to show that the equation:

$$k(a)(b) = a$$

holds for all $a, b \in \mathbf{P}\omega$. This is easy to prove, for we have only to set:

$$A = \{\langle a, a\rangle\} \quad \text{and} \quad B = \{\langle b, b\rangle\},$$

and the equation follows at once. Not all proofs are quite so easy, however.

In the case of the combinator $\mathbf{S}$ it is not strictly true to say that Theorem 7.3(iii) determines it outright. The exact formulation is this: if $s \in \mathbf{P}\omega$ is such that

$$s(f) = s(\lambda x \lambda y.\, f(x)(y)) \quad \text{and} \quad s(f)(g) = s(f)(\lambda x.\, g(x))$$

for all $f, g \in \mathbf{P}\omega$; and if

$$s : (A \to (B \to C)) \to ((A \to B) \to (A \to C))$$

for all A, B, C, then $s = \mathbf{S}$. In other words, we need to know that s converts its first two arguments into functions with the right number of places before we can say that its explicit functionality identifies it as being the combinator $\mathbf{S}$.

In Hindley, Lercher and Seldin (1972) they show that the functionality property:

$$(7.13) \quad \lambda f \lambda g.\, f \circ g : (B \to C) \to ((A \to B) \to (A \to C)),$$

follows from Theorem 7.1(ii) and Theorem 7.3(ii) and (iii) in view of the identity:

$$(7.14) \quad \lambda f \lambda g.\, f \circ g = \mathbf{S}(\mathbf{K}(\mathbf{S}))(\mathbf{K})$$

(see the proof of Theorem 2.4).

A more interesting result concerns the *iterators* defined as follows:

$$(7.15) \quad \mathbf{Z}_0 = \lambda f \lambda x.\, x,$$

$$(7.16) \quad \mathbf{Z}_{n+1} = \lambda f \lambda x.\, f(\mathbf{Z}_n(f)(x)),$$

In other words, $\mathbf{Z}_n(f)(x) = f^n(x)$. These natural combinators can be typed very easily, but Gordon Plotkin has shown that the obvious typing actually characterizes them.

Formalization. Functionality of $\mathbf{I}$, $\mathbf{K}$, and $\mathbf{S}$ for all restricted equivalences, together with uniqueness under those typings (with the η-hypotheses for $\mathbf{S}$).

Theorem (`theorem_7_3.i`). $\mathbf{I} : A \to A$ for every restricted equivalence A.

Proof. $\mathbf{I}$ is a graph and preserves relatedness by acting as the identity. ■

Theorem (`theorem_7_3.ii`). $\mathbf{K} : A \to (B \to A)$ for all restricted equivalences A and B.

Proof. $\mathbf{K}$ and its applications are graphs; relatedness of the first arguments is preserved by discarding the second. ■

Theorem (`theorem_7_3.iii`). $\mathbf{S} : (A \to (B \to C)) \to ((A \to B) \to (A \to C))$ for all restricted equivalences A, B, and C.

Proof. Nested graphhood of $\mathbf{S}$ and its curried applications; at related x, x' the applications $g(x)$ and $f(x)$ are related in B and $B \to C$, so $f(x)(g(x))$ is related in C. ■

Theorem (`theorem_7_3.I_unique`). If $i : A \to A$ for every restricted equivalence A, then $i = \mathbf{I}$.

Proof. Specialize to singletons: $i(a)$ is related to itself in the singleton on a, so $i(a) = a$. ■

Theorem (`theorem_7_3.K_unique`). If $k : A \to (B \to A)$ for all restricted equivalences A and B, then $k = \mathbf{K}$.

Proof. Specialize to singletons on a and b: $k(a)(b)$ lies in the singleton on a, so equals a. ■

Theorem (`theorem_7_3.S_unique`). If s is η-stable in its first two arguments as in Scott's proviso, and $s : (A \to (B \to C)) \to ((A \to B) \to (A \to C))$ for all A, B, C, then $s = \mathbf{S}$.

Proof. Reduce to η-normalized arguments, then evaluate at a singleton argument: the typing forces $s(f)(g)(x) = f(x)(g(x))$. ■

Theorem (`theorem_7_3`). The functionality and uniqueness clauses of Theorem 7.3 hold.

Proof. Assemble the six preceding tools. ■

`theorem_7_3.lean`

```
module

public import DomainTheory.DataTypesAsLattices.Retracts.Icomb
public import DomainTheory.DataTypesAsLattices.Lambda.Scomb
public import DomainTheory.DataTypesAsLattices.Functionality.RestrictedEquiv

import DomainTheory.DataTypesAsLattices.Functionality.theorem_7_1
import DomainTheory.DataTypesAsLattices.Lambda.eta2
import DomainTheory.DataTypesAsLattices.Lambda.Kcomb_more
import DomainTheory.DataTypesAsLattices.Lambda.Scomb_more
import DomainTheory.DataTypesAsLattices.Graph.funOf_more
import DomainTheory.DataTypesAsLattices.Retracts.graphLemmas
import DomainTheory.DataTypesAsLattices.Graph.beta

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_7_3

theorem I_unique (i : Pomega)
    (hi : ∀ A, (arrowE A A).mem i) : i = Icomb := by
  have hgraph : i = graph (fun x => funOf i x) := (hi emptyE).1
  apply funOf.ext_graph hgraph Icomb.isGraph
  intro a
  have ha : (singletonE a).mem (funOf i a) :=
    (theorem_7_1 (singletonE a) (singletonE a)).2.1 (hi (singletonE a))
      ((singletonE.mem a a).mpr rfl)
  simpa [Icomb.app, singletonE.mem] using ha

theorem K_unique (k : Pomega)
    (hk : ∀ A B, (arrowE A (arrowE B A)).mem k) : k = Kcomb := by
  have hgraph : k = graph (fun x => funOf k x) := (hk emptyE emptyE).1
  apply funOf.ext_graph hgraph Kcomb.isGraph
  intro a
  have hkA : (arrowE (singletonE a) (arrowE emptyE (singletonE a))).mem k :=
    hk (singletonE a) emptyE
  have hka : (arrowE emptyE (singletonE a)).mem (funOf k a) :=
    (theorem_7_1 (singletonE a) (arrowE emptyE (singletonE a))).2.1 hkA
      ((singletonE.mem a a).mpr rfl)
  apply funOf.ext_graph hka.1 (Kcomb.app_isGraph a)
```

```
  intro b
  have hkAB : (arrowE (singletonE a) (arrowE (singletonE b) (singletonE a))).mem k :=
    hk (singletonE a) (singletonE b)
  have hkab : (arrowE (singletonE b) (singletonE a)).mem (funOf k a) :=
    (theorem_7_1 (singletonE a) (arrowE (singletonE b) (singletonE a))).2.1 hkAB
      ((singletonE.mem a a).mpr rfl)
  have hab : (singletonE a).mem (funOf (funOf k a) b) :=
    (theorem_7_1 (singletonE b) (singletonE a)).2.1 hkab
      ((singletonE.mem b b).mpr rfl)
  simpa [Kcomb.beta2, singletonE.mem] using hab

theorem S_unique (s : Pomega)
    (h?1 : ∀ f, funOf s f =
      funOf s (graph (fun x => graph (fun y => funOf (funOf f x) y))))
    (h?2 : ∀ f g, funOf (funOf s f) g =
      funOf (funOf s f) (graph (fun x => funOf g x)))
    (hs : ∀ A B C,
      (arrowE (arrowE A (arrowE B C))
        (arrowE (arrowE A B) (arrowE A C))).mem s) :
    s = Scomb := by
  have hsgraph : s = graph (fun f => funOf s f) := (hs emptyE emptyE emptyE).1
  apply funOf.ext_graph hsgraph Scomb.isGraph
  intro f
  let f' : Pomega := graph (fun x => graph (fun y => funOf (funOf f x) y))
  have hf'app (z : Pomega) : funOf f' z = graph (fun y => funOf (funOf f z) y) :=
    eta2.app f z
  have hf'graph : f' = graph (fun z => funOf f' z) := by
    apply graph_ext
    intro z
    exact (hf'app z).symm
  have hsf : funOf s f = funOf s f' := h?1 f
  have hsf'graph : funOf s f' = graph (fun g => funOf (funOf s f') g) := by
    have hf'mem : (arrowE emptyE (arrowE emptyE emptyE)).mem f' :=
      ⟨hf'graph, hf'graph, fun _ _ h => False.elim h⟩
    have := (theorem_7_1 (arrowE emptyE (arrowE emptyE emptyE))
      (arrowE (arrowE emptyE emptyE) (arrowE emptyE emptyE))).2.1
      (hs emptyE emptyE emptyE) hf'mem
    exact this.1
  apply funOf.ext_graph (by rw [hsf]; exact hsf'graph) (Scomb.app_isGraph f)
  intro g
  let g' : Pomega := graph (funOf g)
  have hg'app (z : Pomega) : funOf g' z = funOf g z :=
    beta (funOf.isScottContinuous g) z
  have hg'graph : g' = graph (fun z => funOf g' z) := by
    apply graph_ext
    intro z
    exact (hg'app z).symm
  have hsg : funOf (funOf s f) g = funOf (funOf s f) g' := h?2 f g
  have hsg' : funOf (funOf s f) g' = funOf (funOf s f') g' := by
    rw [hsf]
  have hsg'graph :
      funOf (funOf s f') g' =
        graph (fun z => funOf (funOf (funOf s f') g') z) := by
    have hg'mem : (arrowE emptyE emptyE).mem g' :=
      ⟨hg'graph, hg'graph, fun _ _ h => False.elim h⟩
    have hf'mem : (arrowE emptyE (arrowE emptyE emptyE)).mem f' :=
```

```
    ⟨hf'graph, hf'graph, fun _ _ h => False.elim h⟩
  have hsf'mem :
      (arrowE (arrowE emptyE emptyE) (arrowE emptyE emptyE)).mem (funOf s f') :=
    (theorem_7_1 (arrowE emptyE (arrowE emptyE emptyE))
      (arrowE (arrowE emptyE emptyE) (arrowE emptyE emptyE))).2.1
      (hs emptyE emptyE emptyE) hf'mem
  exact ((theorem_7_1 (arrowE emptyE emptyE)
    (arrowE emptyE emptyE)).2.1 hsf'mem hg'mem).1
apply funOf.ext_graph
  (by rw [hsg, hsg']; exact hsg'graph) (Scomb.app2_isGraph f g)
intro arg
let A := singletonE arg
let B := singletonE (funOf g arg)
let C := singletonE (funOf (funOf f arg) (funOf g arg))
have hf'memABC : (arrowE A (arrowE B C)).mem f' := by
  refine ⟨hf'graph, hf'graph, ?_⟩
  intro x₁ x₂ hx₁₂
  have hx₁ : x₁ = arg := hx₁₂.1
  have hx₂ : x₂ = arg := hx₁₂.2
  have hfxgraph (z : Pomega) :
      funOf f' z = graph (fun y => funOf (funOf f' z) y) := by
    rw [hf'app]
    apply graph_ext
    intro y
    exact (beta (funOf.isScottContinuous (funOf f z)) y).symm
  rw [hx₁, hx₂]
  refine ⟨hfxgraph arg, hfxgraph arg, ?_⟩
  intro y₁ y₂ hy
  have hy₁ : y₁ = funOf g arg := hy.1
  have hy₂ : y₂ = funOf g arg := hy.2
  rw [hy₁, hy₂, hf'app]
  have happ :
      funOf (graph (fun y => funOf (funOf f arg) y)) (funOf g arg) =
        funOf (funOf f arg) (funOf g arg) :=
    beta (funOf.isScottContinuous (funOf f arg)) (funOf g arg)
  exact happ.symm ▶ ⟨rfl, rfl⟩
have hg'memAB : (arrowE A B).mem g' := by
  refine ⟨hg'graph, hg'graph, ?_⟩
  intro x₁ x₂ hx₁₂
  have hx₁ : x₁ = arg := hx₁₂.1
  have hx₂ : x₂ = arg := hx₁₂.2
  rw [hx₁, hx₂, hg'app]
  exact ⟨rfl, rfl⟩
have hsf'mem :
    (arrowE (arrowE A B) (arrowE A C)).mem (funOf s f') :=
  (theorem_7_1 (arrowE A (arrowE B C))
    (arrowE (arrowE A B) (arrowE A C))).2.1 (hs A B C) hf'memABC
have hsg'mem : (arrowE A C).mem (funOf (funOf s f') g') :=
  (theorem_7_1 (arrowE A B) (arrowE A C)).2.1 hsf'mem hg'memAB
have hxA : A.mem arg := (singletonE.mem arg arg).mpr rfl
have hval : C.mem (funOf (funOf (funOf s f') g') arg) :=
  (theorem_7_1 A C).2.1 hsg'mem hxA
have hval' : funOf (funOf (funOf s f') g') arg =
    funOf (funOf f arg) (funOf g arg) :=
  (singletonE.mem _ _).mp hval
have hgoal : funOf (funOf (funOf s f) g) arg =
```

```
      funOf (funOf (funOf s f') g') arg := by
    rw [hsg, hsg']
  rw [hgoal, hval', Scomb.beta3]

theorem i (A : RestrictedEquiv) :
    (arrowE A A).mem Icomb :=
  ⟨Icomb.isGraph, Icomb.isGraph, fun x y hxy => by simpa [Icomb.app] using hxy⟩

theorem ii (A B : RestrictedEquiv) :
    (arrowE A (arrowE B A)).mem Kcomb := by
  refine ⟨Kcomb.isGraph, Kcomb.isGraph, ?_⟩
  intro x x' hx
  refine ⟨Kcomb.app_isGraph x, Kcomb.app_isGraph x', ?_⟩
  intro y y' _hy
  simpa [Kcomb.beta2] using hx

theorem iii (A B C : RestrictedEquiv) :
    (arrowE (arrowE A (arrowE B C))
      (arrowE (arrowE A B) (arrowE A C))).mem Scomb := by
  refine ⟨Scomb.isGraph, Scomb.isGraph, ?_⟩
  intro f f' hf
  refine ⟨Scomb.app_isGraph f, Scomb.app_isGraph f', ?_⟩
  intro g g' hg
  refine ⟨Scomb.app2_isGraph f g, Scomb.app2_isGraph f' g', ?_⟩
  intro x x' hx
  have hgx : (arrowE A B).rel g g' := hg
  have hfx : (arrowE A (arrowE B C)).rel f f' := hf
  have hB : B.rel (funOf g x) (funOf g' x') := hgx.2.2 x x' hx
  have hBC : (arrowE B C).rel (funOf f x) (funOf f' x') := hfx.2.2 x x' hx
  simpa [Scomb.beta3] using hBC.2.2 (funOf g x) (funOf g' x') hB

end theorem_7_3

theorem theorem_7_3 :
    (∀ A, (arrowE A A).mem Icomb) ∧
      (∀ A B, (arrowE A (arrowE B A)).mem Kcomb) ∧
      (∀ A B C,
        (arrowE (arrowE A (arrowE B C))
          (arrowE (arrowE A B) (arrowE A C))).mem Scomb) ∧
      (∀ i, (∀ A, (arrowE A A).mem i) → i = Icomb) ∧
      (∀ k, (∀ A B, (arrowE A (arrowE B A)).mem k) → k = Kcomb) ∧
      (∀ s,
        (∀ f, funOf s f =
          funOf s (graph (fun x => graph (fun y => funOf (funOf f x) y)))) →
        (∀ f g, funOf (funOf s f) g =
          funOf (funOf s f) (graph (fun x => funOf g x))) →
        (∀ A B C,
          (arrowE (arrowE A (arrowE B C))
            (arrowE (arrowE A B) (arrowE A C))).mem s) →
        s = Scomb) :=
  ⟨theorem_7_3.i, theorem_7_3.ii, theorem_7_3.iii,
    theorem_7_3.I_unique, theorem_7_3.K_unique, theorem_7_3.S_unique⟩

end DomainTheory.DataTypesAsLattices
```

2.8.7 Theorem 7.4 ✓

THEOREM 7.4 (The iterator theorem). *The combinators $\mathbf{Z}_n$ enjoy the following functionality property which holds for all equivalence relations A:*

(i) $\mathbf{Z}_n : (A \to A) \to (A \to A)$.

Further, if any element $z \in \mathbf{P}\omega$ satisfies (i) for all A, then it must be one of the iterators, provided that $z(f) = z(\lambda x.\, f(x))$ holds for all $f \in \mathbf{P}\omega$.

That each of the $\mathbf{Z}_n$ satisfies Theorem 7.4(i) is obvious. Suppose z were another such element. Then clearly:

$$z = \lambda f \lambda x.\, z(f)(x).$$

Suppose f and x are fixed for the moment. Let:

$$A = \{(f^n(x), f^n(x)) \mid n \in \omega\},$$

where we can suppose in addition that:

$$f = \lambda x.\, f(x).$$

Then $f : A \to A$ is clear, and so $z(f) : A \to A$ also. But $x : A$, therefore $z(f)(x) = f^n(x)$, for some $n \in \omega$, because $z(f)(x) : A$. The trouble with this easy part of the argument is that the integer n depends on f and x. What we must show is that it is independent of f and x; then $z = \mathbf{Z}_n$ will follow.

Plotkin's method for this case is to introduce some independent successor functions:

$$\sigma_j = \lambda x.\, \{(j, k+1) \mid (j,k) \in x\}. \tag{7.17}$$

Note that:

$$\sigma_j^m((j',0)) = \begin{cases} (j,m) & \text{if } j = j'; \\ \bot & \text{if } j \neq j'. \end{cases} \tag{7.18}$$

It then follows that:

$$(\sigma_j \cup \sigma_{j'})^m((j,0) \cup (j',0)) = (j,m) \cup (j',m). \tag{7.19}$$

Having these identities, we return to the argument. From what we saw before, given $j \in \omega$, there is an n_j such that:

$$z(\sigma_j)((j,0)) = \sigma_j^{n_j}((j,0)) = (j, n_j)$$

Take any two $j, j' \in \omega$. We also know there is an $n \in \omega$ where:

$$z(\sigma_j \cup \sigma_{j'})((j,0) \cup (j',0)) = (j,n) \cup (j',n).$$

in view of (7.19). But since $\sigma_j \subseteq \sigma_j \cup \sigma_{j'}$ and $\sigma_{j'} \subseteq \sigma_j \cup \sigma_{j'}$, we have:

$$(j, n_j) \cup (j', n_{j'}) \subseteq (j,n) \cup (j',n).$$

It follows that

$$n_j = n = n_{j'},$$

and so they are all equal. This determines the fixed $n \in \omega$ we want.

Suppose that both f and x are finite sets in $\mathbf{P}\omega$. Choose $j > \max(f \cup x)$. Let A this time be the least equivalence relation such that:

$$f^m(x)\, A\, f^m(x) \cup (j, m)$$

holds for all $m \in \omega$. We then check that:

$$\lambda x.\, f(x)\, (A \to A)\, (\lambda x.\, f(x)) \cup \sigma_j.$$

Therefore, we have:

$$z(\lambda x.\, f(x))\, (A \to A)\, z((\lambda x.\, f(x)) \cup \sigma_j),$$

and since $x\, A\, x \cup (j, 0)$, we get:

$$z(\lambda x.\, f(x))(x)\, A\, z((\lambda x.\, f(x)) \cup \sigma_j)(x \cup (j, 0)).$$

Now there is an integer $m \in \omega$ such that:

$$\begin{aligned} z((\lambda x.\, f(x)) \cup \sigma_j)(x \cup (j, 0)) &= f^m(x) \cup \sigma_j^m((j, 0)) \\ &= f^m(x) \cup (j, m), \end{aligned}$$

where we have been able to separate f and σ because j is so large. But the right-hand side must contain $z(\sigma_j)(j, 0) = (j, n)$. Thus m and our fixed n are the same. The other element

$$z(\lambda x.\, f(x))(x) = f^q(x)$$

for some $q \in \omega$. Thus we have:

$$f^q(x)\, A\, f^n(x) \cup (j, n).$$

Again since j is so large, $(j, n) \notin f^q(x)$. Thus by our choice of A we must have $f^q(x) = f^n(x)$. This means then, since n is fixed, that for *all finite* f, x:

$$z(\lambda x.\, f(x))(x) = f^n(x).$$

But then by continuity this equation holds for *all* f, x. It follows now that $z = \mathbf{Z}_n$, by the proviso of the theorem.

These results bring up many questions which we leave unanswered here. For example, which combinators (i.e., pure λ-terms) have functionality as in the examples above, and can we decide when a term is one such? In particular, can the diagonal combinator $\lambda x.\, x(x)$ be typed? (The argument of Hindley, et al. (1972, p. 81) is purely formal and does not apparently apply to the model.) What about terms in LAMBDA beyond the pure λ-calculus?

Formalization. The iterator theorem packages Plotkin's tag-erasure argument: successor identities for σ_j, a restricted equivalence that pairs finite orbits with fresh tags, and uniqueness of any η-normalized z that is functional at every $(A \to A) \to (A \to A)$.

Definition (`eraseTag`). Erase tag j from u by discarding every pair whose first component is j.

Theorem (`eraseTag.Z_finite`). On a finite orbit $Z_m(e_p, e_q)$, erasing the fresh tag $\max(p, q) + 1$ leaves the orbit unchanged.

Proof. Finite orbits never carry that fresh tag. ■

Theorem (`eraseTag.Z_finite_union`). Erasing the fresh tag from an orbit union a fresh singleton recovers the plain orbit.

Proof. Membership either lies in the orbit (kept) or is the fresh pair (discarded). ■

Definition (`plotkinGood`). An element is Plotkin-good when it is a finite orbit of e_p on e_q, or that orbit union the fresh singleton at step m.

Definition (`plotkinRel`). The generating relation identifies an orbit with the same orbit union its fresh singleton at the same step, in either order.

Definition (`plotkinE`). The Plotkin equivalence relates good elements whose equivalence closure under that generating relation identifies them.

Theorem (`plotkinE.erase`). Related elements have equal erase-tag projections at the fresh tag.

Proof. Induction on the generated equivalence, using the two erase-tag orbit identities. ■

Theorem (`plotkinE.finite_separation`). Iterating the η-normalized finite graph of e_p united with σ_j on e_q union a fresh zero yields the finite orbit union the fresh singleton.

Proof. Induction on the iterate, separating e_p from σ_j by freshness of the tag. ■

Theorem (`plotkinE.function_related`). The η-normalized graph of e_p is related in $A \to A$ to that graph united with σ_j, for A the Plotkin equivalence at the fresh tag.

Proof. Both sides are graphs; on related arguments, erase-tag agreement and the four orbit/singleton cases produce related results. ■

Theorem (`eq_7_18_eq`). $\sigma_j^m(\{(j, 0)\}) = \{(j, m)\}$.

Proof. Induction, applying the successor-on-singleton law for σ_j. ■

Theorem (`eq_7_18_ne`). If $j \neq j'$, then $\sigma_j^{m+1}(\{(j', 0)\}) = \bot$.

Proof. Induction: the first step kills a wrong tag, and σ_j preserves $\bot$. ■

Theorem (`eq_7_19`). $(\sigma_j \cup \sigma_{j'})^m(\{(j, 0)\} \cup \{(j', 0)\}) = \{(j, m)\} \cup \{(j', m)\}$.

Proof. Equal tags reduce to the previous identity; distinct tags induct using the pairwise successor law. ■

Theorem (`theorem_7_4.i`). Each iterator $\mathbf{Z}_n$ is a member of $(A \to A) \to (A \to A)$ for every restricted equivalence A.

Proof. Iterators are graphs, and relatedness is preserved by the iterate law for Z. ■

Theorem (`theorem_7_4.plotkin`). If z is η-normalized and functional at every $(A \to A) \to (A \to A)$, then for any f and x there is an n with $z(f)(x) = f^n(x)$.

Proof. Specialize to the iterate equivalence of the η-normalized f at x; functionality forces the value into that orbit. ■

Theorem (`theorem_7_4.finite`). Under those hypotheses, if $z(\sigma_j)(\{(j, 0)\}) = \{(j, n)\}$ for every j, then on finite e_p and e_q one has $z(e_p)(e_q) = e_p^n(e_q)$.

Proof. Relate the η-normalized finite graph to its union with a fresh σ_j in the Plotkin equivalence; compare orbits by erase-tag, and force the iterate index to equal the fixed n by a fresh-tag witness. ■

Theorem (`theorem_7_4.sigma_index`). Under those hypotheses there is a single n such that $z(\sigma_j)(\{(j, 0)\}) = \{(j, n)\}$ for every j.

Proof. Compare the indices at 0, at j, and at their union via (7.18)–(7.19) and monotonicity of application. ■

Theorem (`theorem_7_4.unique`). Under those hypotheses, $z = \mathbf{Z}_n$ for that n.

Proof. On finite arguments the previous two tools give agreement with $\mathbf{Z}_n$; continuity and η-normalization extend to all arguments, then graph extensionality. ■

Theorem (`theorem_7_4`). Every $\mathbf{Z}_n$ is functional at all $(A \to A) \to (A \to A)$, and every η-normalized z with that functionality is some $\mathbf{Z}_n$.

Proof. Assemble the membership and uniqueness tools. ■

theorem_7_4.lean

```
module

public import DomainTheory.DataTypesAsLattices.Enumeration.SumMed
public import DomainTheory.DataTypesAsLattices.Enumeration.Zcomb
import DomainTheory.DataTypesAsLattices.Functionality.theorem_7_1
import DomainTheory.DataTypesAsLattices.Functionality.iterateE
import DomainTheory.DataTypesAsLattices.Lambda.graph_model
import DomainTheory.DataTypesAsLattices.Graph.mu_law
import DomainTheory.DataTypesAsLattices.Functionality.PlotkinHelpers
import DomainTheory.DataTypesAsLattices.Lambda.eq_2_9
import DomainTheory.DataTypesAsLattices.Graph.funOf_more
import DomainTheory.DataTypesAsLattices.Retracts.graphLemmas
import DomainTheory.DataTypesAsLattices.Graph.beta
import DomainTheory.DataTypesAsLattices.FixedPoint.theorem_1_3

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def eraseTag (j : ℕ) (u : Pomega) : Pomega :=
  {p | p ∈ u ∧ ∀ k, p = pair j k}

namespace eraseTag

theorem Z_finite (p q m : ℕ) :
    eraseTag (max p q + 1) (Z m (e p) (e q)) = Z m (e p) (e q) := by
  ext k
  constructor
  · exact fun hk => hk.1
  · intro hk
    exact ⟨hk, fun r hkr => Z.finite_no_tag p q m r (hkr ▸ hk)⟩

theorem Z_finite_union (p q m : ℕ) :
    eraseTag (max p q + 1)
        (Z m (e p) (e q) ∪ {pair (max p q + 1) m}) =
      Z m (e p) (e q) := by
  ext k
  constructor
  · intro ⟨hk, hnot⟩
    rcases hk with hk | hk
    · exact hk
    · exact (hnot m (by simpa using hk)).elim
  · intro hk
    exact ⟨Or.inl hk, fun r hkr => Z.finite_no_tag p q m r (hkr ▸ hk)⟩

end eraseTag
```

```
def plotkinGood (p q j : ℕ) (u : Pomega) : Prop :=
  ∃ m, u = Z m (e p) (e q) ∨
    u = Z m (e p) (e q) ∪ {pair j m}

def plotkinRel (p q j : ℕ) (u v : Pomega) : Prop :=
  ∃ m, (u = Z m (e p) (e q) ∧
      v = Z m (e p) (e q) ∪ {pair j m}) ∨
    (v = Z m (e p) (e q) ∧
      u = Z m (e p) (e q) ∪ {pair j m})

def plotkinE (p q j : ℕ) : RestrictedEquiv where
  rel u v :=
    plotkinGood p q j u ∧ plotkinGood p q j v ∧
      Relation.EqvGen (plotkinRel p q j) u v
  symm := by
    intro u v ⟨hu, hv, huv⟩
    exact ⟨hv, hu, Relation.EqvGen.symm _ _ huv⟩
  trans := by
    intro u v w ⟨hu, _hv, huv⟩ ⟨_hv', hw, hvw⟩
    exact ⟨hu, hw, Relation.EqvGen.trans _ _ _ huv hvw⟩

namespace plotkinE

theorem erase {p q : ℕ} {u v : Pomega}
    (h : (plotkinE p q (max p q + 1)).rel u v) :
    eraseTag (max p q + 1) u = eraseTag (max p q + 1) v := by
  rcases h with ⟨_hu, _hv, h⟩
  clear _hu _hv
  induction h with
  | rel x y hxy =>
      rcases hxy with ⟨m, ⟨rfl, rfl⟩ | ⟨rfl, rfl⟩⟩
      · rw [eraseTag.Z_finite, eraseTag.Z_finite_union]
      · rw [eraseTag.Z_finite, eraseTag.Z_finite_union]
  | refl => rfl
  | symm _ _ _ ih => exact ih.symm
  | trans _ _ _ _ _ ih₁ ih₂ => exact ih₁.trans ih₂

theorem finite_separation (p q m : ℕ) :
    Z m
        (graph (fun y => funOf (e p) y) ∪
          graph (sigmaJ (max p q + 1)))
        ((e q) ∪ {pair (max p q + 1) 0}) =
      Z m (e p) (e q) ∪ {pair (max p q + 1) m} := by
  induction m with
  | zero => rfl
  | succ m ih =>
      rw [Z, DomainTheory.DataTypesAsLattices.eq_2_9, ih]
      have hbeta :
          funOf (graph (fun y => funOf (e p) y))
              (Z m (e p) (e q) ∪ {pair (max p q + 1) m}) =
            funOf (e p) (Z m (e p) (e q) ∪ {pair (max p q + 1) m}) :=
        beta (funOf.isScottContinuous (e p)) _
      rw [hbeta, funOf.e_union_fresh p (max p q + 1) m _
        (Nat.lt_succ_of_le (Nat.le_max_left p q)), sigmaJ.app,
        sigmaJ.union_fresh (fun k => Z.finite_no_tag p q m k)]
      rfl
```

```
theorem function_related (p q : ℕ) :
    (arrowE
      (plotkinE p q (max p q + 1))
      (plotkinE p q (max p q + 1))).rel
        (graph (fun y => funOf (e p) y))
        (graph (fun y => funOf (e p) y) ∪
          graph (sigmaJ (max p q + 1))) := by
  have hgf : graph (fun y => funOf (e p) y) =
      graph (fun y => funOf (graph (fun y => funOf (e p) y)) y) := by
    apply graph_ext
    intro y
    exact (beta (funOf.isScottContinuous (e p)) y).symm
  have hgu :
      graph (fun y => funOf (e p) y) ∪ graph (sigmaJ (max p q + 1)) =
        graph (fun y => funOf
          (graph (fun y => funOf (e p) y) ∪
            graph (sigmaJ (max p q + 1))) y) := by
    let F := fun y => funOf (e p) y ∪ sigmaJ (max p q + 1) y
    have hrep :
        graph (fun y => funOf (e p) y) ∪ graph (sigmaJ (max p q + 1)) =
          graph F := DomainTheory.DataTypesAsLattices.eq_2_10 _ _
    rw [hrep]
    congr 1
    funext y
    dsimp only [F]
    rw [← hrep]
    rw [DomainTheory.DataTypesAsLattices.eq_2_9, PlotkinHelpers.normalized_finite_app,
     sigmaJ.app]
  refine ⟨hgf, hgu, ?_⟩
  intro u v huv
  have herase := plotkinE.erase huv
  rcases huv.1 with ⟨r, hur | hur⟩
  <;> rcases huv.2.1 with ⟨s, hvs | hvs⟩
  all_goals
    subst u
    subst v
  · have hrs : Z r (e p) (e q) = Z s (e p) (e q) := by
      simpa [eraseTag.Z_finite] using herase
    have hrs' : Z (r + 1) (e p) (e q) = Z (s + 1) (e p) (e q) := by
      simpa [Z] using congrArg (fun w => funOf (e p) w) hrs
    have hleft :
        funOf (graph (fun y => funOf (e p) y)) (Z r (e p) (e q)) =
          Z (r + 1) (e p) (e q) := by
      rw [PlotkinHelpers.normalized_finite_app]
      rfl
    have hright :
        funOf
            (graph (fun y => funOf (e p) y) ∪
              graph (sigmaJ (max p q + 1)))
            (Z s (e p) (e q)) = Z (s + 1) (e p) (e q) :=
      PlotkinHelpers.finite_sigma_plain_app p q s
    rw [hleft, hright, ← hrs']
    exact ⟨⟨r + 1, Or.inl rfl⟩, ⟨r + 1, Or.inl rfl⟩,
      Relation.EqvGen.refl _⟩
  · have hrs : Z r (e p) (e q) = Z s (e p) (e q) := by
```

```
    exact (eraseTag.Z_finite p q r).symm.trans
      (herase.trans (eraseTag.Z_finite_union p q s))
  have hrs' : Z (r + 1) (e p) (e q) = Z (s + 1) (e p) (e q) := by
    simpa [Z] using congrArg (fun w => funOf (e p) w) hrs
  have hleft :
      funOf (graph (fun y => funOf (e p) y)) (Z r (e p) (e q)) =
        Z (r + 1) (e p) (e q) := by
    rw [PlotkinHelpers.normalized_finite_app]
    rfl
  have hright :
      funOf
          (graph (fun y => funOf (e p) y) ∪
            graph (sigmaJ (max p q + 1)))
          (Z s (e p) (e q) ∪ {pair (max p q + 1) s}) =
        Z (s + 1) (e p) (e q) ∪
          {pair (max p q + 1) (s + 1)} :=
    PlotkinHelpers.finite_sigma_union_app p q s
  rw [hleft, hright, hrs']
  exact ⟨⟨s + 1, Or.inl rfl⟩, ⟨s + 1, Or.inr rfl⟩,
    Relation.EqvGen.rel _ _
      ⟨s + 1, Or.inl ⟨rfl, rfl⟩⟩⟩
· have hrs : Z r (e p) (e q) = Z s (e p) (e q) := by
    exact (eraseTag.Z_finite_union p q r).symm.trans
      (herase.trans (eraseTag.Z_finite p q s))
  have hrs' : Z (r + 1) (e p) (e q) = Z (s + 1) (e p) (e q) := by
    simpa [Z] using congrArg (fun w => funOf (e p) w) hrs
  have hleft :
      funOf (graph (fun y => funOf (e p) y))
          (Z r (e p) (e q) ∪ {pair (max p q + 1) r}) =
        Z (r + 1) (e p) (e q) :=
    PlotkinHelpers.normalized_finite_fresh_app p q r
  have hright :
      funOf
          (graph (fun y => funOf (e p) y) ∪
            graph (sigmaJ (max p q + 1)))
          (Z s (e p) (e q)) = Z (s + 1) (e p) (e q) :=
    PlotkinHelpers.finite_sigma_plain_app p q s
  rw [hleft, hright, ← hrs']
  exact ⟨⟨r + 1, Or.inl rfl⟩, ⟨r + 1, Or.inl rfl⟩,
    Relation.EqvGen.refl _⟩
· have hrs : Z r (e p) (e q) = Z s (e p) (e q) := by
    simpa using (eraseTag.Z_finite_union p q r).symm.trans
      (herase.trans (eraseTag.Z_finite_union p q s))
  have hrs' : Z (r + 1) (e p) (e q) = Z (s + 1) (e p) (e q) := by
    simpa [Z] using congrArg (fun w => funOf (e p) w) hrs
  have hleft :
      funOf (graph (fun y => funOf (e p) y))
          (Z r (e p) (e q) ∪ {pair (max p q + 1) r}) =
        Z (r + 1) (e p) (e q) :=
    PlotkinHelpers.normalized_finite_fresh_app p q r
  have hright :
      funOf
          (graph (fun y => funOf (e p) y) ∪
            graph (sigmaJ (max p q + 1)))
          (Z s (e p) (e q) ∪ {pair (max p q + 1) s}) =
        Z (s + 1) (e p) (e q) ∪
```

```
            {pair (max p q + 1) (s + 1)} :=
      PlotkinHelpers.finite_sigma_union_app p q s
    rw [hleft, hright, hrs']
    exact ⟨⟨s + 1, Or.inl rfl⟩, ⟨s + 1, Or.inr rfl⟩,
      Relation.EqvGen.rel _ _
        ⟨s + 1, Or.inl ⟨rfl, rfl⟩⟩⟩

end plotkinE

theorem eq_7_18_eq (j m : ℕ) :
    Z m (graph (sigmaJ j)) {pair j 0} = ({pair j m} : Pomega) := by
  induction m with
  | zero => rfl
  | succ m ih =>
    calc
      Z (m + 1) (graph (sigmaJ j)) {pair j 0}
        = funOf (graph (sigmaJ j)) (Z m (graph (sigmaJ j)) {pair j 0}) := rfl
      _ = sigmaJ j (Z m (graph (sigmaJ j)) {pair j 0}) := sigmaJ.app _ _
      _ = sigmaJ j {pair j m} := by rw [ih]
      _ = {pair j (m + 1)} := sigmaJ.succ_singleton j m

theorem eq_7_18_ne (j j' m : ℕ) (hne : j = j') :
    Z (m + 1) (graph (sigmaJ j)) {pair j' 0} = botElem := by
  induction m with
  | zero =>
    calc
      Z 1 (graph (sigmaJ j)) {pair j' 0}
        = funOf (graph (sigmaJ j)) {pair j' 0} := rfl
      _ = sigmaJ j {pair j' 0} := sigmaJ.app _ _
      _ = botElem := sigmaJ.succ_ne j j' 0 hne
  | succ m ih =>
    calc
      Z (m + 1 + 1) (graph (sigmaJ j)) {pair j' 0}
        = funOf (graph (sigmaJ j))
            (Z (m + 1) (graph (sigmaJ j)) {pair j' 0}) := rfl
      _ = sigmaJ j (Z (m + 1) (graph (sigmaJ j)) {pair j' 0}) :=
          sigmaJ.app _ _
      _ = sigmaJ j botElem := by rw [ih]
      _ = botElem := sigmaJ.bot j

theorem eq_7_19 (j j' m : ℕ) :
    Z m (graph (sigmaJ j) ∪ graph (sigmaJ j'))
        (({pair j 0} : Pomega) ∪ {pair j' 0}) =
      ({pair j m} : Pomega) ∪ {pair j' m} := by
  by_cases h : j = j'
  · subst j'
    simp only [Set.union_self]
    exact eq_7_18_eq j m
  · induction m with
    | zero => rfl
    | succ m ih =>
      rw [Z, eq_2_9, ih, sigmaJ.app, sigmaJ.app,
        sigmaJ.pair_union j j' m h]
      rw [show sigmaJ j' (({pair j m} : Pomega) ∪ {pair j' m}) =
          ({pair j' (m + 1)} : Pomega) by
        simpa [Set.union_comm] using sigmaJ.pair_union j' j m (Ne.symm h)]
```

```
namespace theorem_7_4

theorem i (A : RestrictedEquiv) (n : ℕ) :
    (arrowE (arrowE A A) (arrowE A A)).mem (Zcomb n) := by
  refine ⟨Zcomb.isGraph n, Zcomb.isGraph n, ?_⟩
  intro f f' hf
  refine ⟨Zcomb.app_isGraph n f, Zcomb.app_isGraph n f', ?_⟩
  intro x y hxy
  simpa [Zcomb.app2] using Z.rel A n hf.2.2 hxy

theorem plotkin (z : Pomega)
    (h? : ∀ f, funOf z f = funOf z (graph (fun y => funOf f y)))
    (hz : ∀ A, (arrowE (arrowE A A) (arrowE A A)).mem z)
    (f x : Pomega) :
    ∃ n, funOf (funOf z f) x = Z n f x := by
  let f' : Pomega := graph (fun y => funOf f y)
  have hf'graph : f' = graph (fun y => funOf f' y) := by
    apply graph_ext
    intro y
    exact (beta (funOf.isScottContinuous f) y).symm
  let A := iterateE f' x
  have hf'mem : (arrowE A A).mem f' := by
    refine ⟨hf'graph, hf'graph, ?_⟩
    intro u v huv
    rcases huv with ⟨⟨n, rfl⟩, rfl⟩
    refine ⟨⟨n + 1, rfl⟩, rfl⟩
  have hzA : (arrowE (arrowE A A) (arrowE A A)).mem z := hz A
  have hzf : (arrowE A A).mem (funOf z f') :=
    (theorem_7_1 (arrowE A A) (arrowE A A)).2.1 hzA hf'mem
  have hx : A.mem x := ⟨⟨0, by simp [Z]⟩, rfl⟩
  have hval : A.mem (funOf (funOf z f') x) :=
    (theorem_7_1 A A).2.1 hzf hx
  obtain ⟨⟨n, hn⟩, _⟩ := hval
  refine ⟨n, ?_⟩
  have h?f : funOf z f = funOf z f' := h? f
  rw [h?f, hn, Z.graph_funOf]

theorem finite (z : Pomega)
    (h? : ∀ f, funOf z f = funOf z (graph (fun y => funOf f y)))
    (hz : ∀ A, (arrowE (arrowE A A) (arrowE A A)).mem z)
    {n : ℕ}
    (hn : ∀ j, funOf (funOf z (graph (sigmaJ j))) {pair j 0} =
      ({pair j n} : Pomega))
    (p q : ℕ) :
    funOf (funOf z (e p)) (e q) = Z n (e p) (e q) := by
  let j := max p q + 1
  let gf := graph (fun y => funOf (e p) y)
  let gu := gf ∪ graph (sigmaJ j)
  have hfg : (arrowE
      (plotkinE p q j) (plotkinE p q j)).rel gf gu := by
    simpa [j, gf, gu] using plotkinE.function_related p q
  have hzfg :
      (arrowE (plotkinE p q j) (plotkinE p q j)).rel
        (funOf z gf) (funOf z gu) :=
    (hz (plotkinE p q j)).2.2 gf gu hfg
```

```
  have hstart :
      (plotkinE p q j).rel (e q) (e q ∪ {pair j 0}) := by
    refine ⟨⟨0, Or.inl rfl⟩, ⟨0, Or.inr rfl⟩, ?_⟩
    exact Relation.EqvGen.rel _ _
      ⟨0, Or.inl ⟨rfl, rfl⟩⟩
  have hout :
      (plotkinE p q j).rel
        (funOf (funOf z gf) (e q))
        (funOf (funOf z gu) (e q ∪ {pair j 0})) :=
    hzfg.2.2 _ _ hstart
  obtain ⟨r, hr⟩ := theorem_7_4.plotkin z h? hz gf (e q)
  obtain ⟨m, hm⟩ :=
    theorem_7_4.plotkin z h? hz gu (e q ∪ {pair j 0})
  have hleft :
      funOf (funOf z gf) (e q) = Z r (e p) (e q) := by
    rw [hr]
    exact Z.graph_funOf r (e p) (e q)
  have hright :
      funOf (funOf z gu) (e q ∪ {pair j 0}) =
        Z m (e p) (e q) ∪ {pair j m} := by
    rw [hm]
    simpa [j, gf, gu] using plotkinE.finite_separation p q m
  have herase := plotkinE.erase hout
  have horbit : Z r (e p) (e q) = Z m (e p) (e q) := by
    rw [hleft, hright] at herase
    exact (eraseTag.Z_finite p q r).symm.trans
      (herase.trans (eraseTag.Z_finite_union p q m))
  have hsigmaSub :
      funOf (funOf z (graph (sigmaJ j))) {pair j 0} ⊆
        funOf (funOf z gu) (e q ∪ {pair j 0}) := by
    exact mu_law
      (funOf.monotone_right z Set.subset_union_right)
      Set.subset_union_right
  have htag : pair j n ∈ Z m (e p) (e q) ∪ {pair j m} := by
    rw [← hright]
    apply hsigmaSub
    rw [hn j]
    simp
  have hnm : n = m := by
    rcases htag with hbad | htag
    · exact (Z.finite_no_tag p q m n (by simpa [j] using hbad)).elim
    · exact (pair_inj htag).2
  rw [h? (e p), hleft, horbit, ← hnm]

theorem sigma_index (z : Pomega)
    (h? : ∀ f, funOf z f = funOf z (graph (fun y => funOf f y)))
    (hz : ∀ A, (arrowE (arrowE A A) (arrowE A A)).mem z) :
    ∃ n, ∀ j,
      funOf (funOf z (graph (sigmaJ j))) {pair j 0} =
        ({pair j n} : Pomega) := by
  obtain ⟨n, hn⟩ :=
    theorem_7_4.plotkin z h? hz (graph (sigmaJ 0)) {pair 0 0}
  refine ⟨n, ?_⟩
  intro j
  have hn' :
      funOf (funOf z (graph (sigmaJ 0))) {pair 0 0} =
```

```
      ({pair 0 n} : Pomega) := by
  rw [hn, eq_7_18_eq]
by_cases hj : j = 0
· subst j
  exact hn'
obtain ⟨nj, hnj⟩ :=
  theorem_7_4.plotkin z h? hz (graph (sigmaJ j)) {pair j 0}
have hnj' :
    funOf (funOf z (graph (sigmaJ j))) {pair j 0} =
      ({pair j nj} : Pomega) := by
  rw [hnj, eq_7_18_eq]
obtain ⟨k, hk⟩ := theorem_7_4.plotkin z h? hz
  (graph (sigmaJ 0) ∪ graph (sigmaJ j))
  (({pair 0 0} : Pomega) ∪ {pair j 0})
have hk' :
    funOf
        (funOf z (graph (sigmaJ 0) ∪ graph (sigmaJ j)))
        (({pair 0 0} : Pomega) ∪ {pair j 0}) =


      ({pair 0 k} : Pomega) ∪ {pair j k} := by
  rw [hk, eq_7_19]
have hmono0 :
    funOf (funOf z (graph (sigmaJ 0))) {pair 0 0} ⊆
      funOf
        (funOf z (graph (sigmaJ 0) ∪ graph (sigmaJ j)))
        (({pair 0 0} : Pomega) ∪ {pair j 0}) :=
  mu_law
    (funOf.monotone_right z Set.subset_union_left)
    Set.subset_union_left
have hmonoj :
    funOf (funOf z (graph (sigmaJ j))) {pair j 0} ⊆
      funOf
        (funOf z (graph (sigmaJ 0) ∪ graph (sigmaJ j)))
        (({pair 0 0} : Pomega) ∪ {pair j 0}) :=
  mu_law
    (funOf.monotone_right z Set.subset_union_right)
    Set.subset_union_right
have h0mem : pair 0 n ∈ ({pair 0 k} : Pomega) ∪ {pair j k} := by
  rw [← hk']
  apply hmono0
  rw [hn']
  simp
have hjmem : pair j nj ∈ ({pair 0 k} : Pomega) ∪ {pair j k} := by
  rw [← hk']
  apply hmonoj
  rw [hnj']
  simp
have hnk : n = k := by
  rcases h0mem with h0 | h0
  · exact (pair_inj h0).2
  · exact (hj ((pair_inj h0).1).symm).elim
have hnjk : nj = k := by
  rcases hjmem with hj0 | hjj
  · exact (hj (pair_inj hj0).1).elim
  · exact (pair_inj hjj).2
rw [hnj', hnjk, ← hnk]
```

```
theorem unique (z : Pomega)
    (h? : ∀ f, funOf z f = funOf z (graph (fun y => funOf f y)))
    (hz : ∀ A, (arrowE (arrowE A A) (arrowE A A)).mem z) :
    ∃ n, z = Zcomb n := by
  obtain ⟨n, hn⟩ := theorem_7_4.sigma_index z h? hz
  refine ⟨n, ?_⟩
  have hfinite (p : ℕ) :
      funOf z (e p) = funOf (Zcomb n) (e p) := by
    let gp := graph (fun y => funOf (e p) y)
    have hgpGraph : gp = graph (fun y => funOf gp y) := by
      apply graph_ext
      intro y
      exact (PlotkinHelpers.normalized_finite_app p y).symm
    have hgpMem : (arrowE emptyE emptyE).mem gp :=
      ⟨hgpGraph, hgpGraph, fun _ _ h => False.elim h⟩
    have hzgpGraph : funOf z gp = graph (fun y => funOf (funOf z gp) y) :=
      ((theorem_7_1 (arrowE emptyE emptyE) (arrowE emptyE emptyE)).2.1
        (hz emptyE) hgpMem).1
    have hzFiniteGraph :
        funOf z (e p) = graph (fun y => funOf (funOf z (e p)) y) := by
      rw [h? (e p)]
      exact hzgpGraph
    apply funOf.ext_graph hzFiniteGraph (Zcomb.app_isGraph n (e p))
    intro x
    have hright :
        IsScottContinuous (fun y => Z n (e p) y) :=
      Z.isScottContinuous_right n (e p)
    have hleft :
        IsScottContinuous (fun y => funOf (funOf z (e p)) y) :=
      funOf.isScottContinuous (funOf z (e p))
    have heq := congrFun
      (IsScottContinuous.determined hleft hright
        (fun q => theorem_7_4.finite z h? hz hn p q)) x
    simpa [Zcomb.app2] using heq
  have hall (f : Pomega) : funOf z f = funOf (Zcomb n) f := by
    let gf := graph (fun y => funOf f y)
    have hgfGraph : gf = graph (fun y => funOf gf y) := by
      apply graph_ext
      intro y
      exact (beta (funOf.isScottContinuous f) y).symm
    have hgfMem : (arrowE emptyE emptyE).mem gf :=
      ⟨hgfGraph, hgfGraph, fun _ _ h => False.elim h⟩
    have hzgfGraph : funOf z gf = graph (fun y => funOf (funOf z gf) y) :=
      ((theorem_7_1 (arrowE emptyE emptyE) (arrowE emptyE emptyE)).2.1
        (hz emptyE) hgfMem).1
    have hzfGraph :
        funOf z f = graph (fun y => funOf (funOf z f) y) := by
      rw [h? f]
      exact hzgfGraph
    apply funOf.ext_graph hzfGraph (Zcomb.app_isGraph n f)
    intro x
    have hleft :
        IsScottContinuous (fun g => funOf (funOf z g) x) :=
      theorem_1_3 (f := fun u => funOf u x) (g := funOf z)
        (funOf.isScottContinuous_left x)
```

```
        (funOf.isScottContinuous z)
    have hright : IsScottContinuous (fun g => Z n g x) :=
      Z.isScottContinuous_left n x
    have heq := congrFun
      (IsScottContinuous.determined hleft hright (fun p => by
        have := congrArg (fun w => funOf w x) (hfinite p)
        simpa [Zcomb.app2] using this)) f
    simpa [Zcomb.app2] using heq
  exact funOf.ext_graph (hz emptyE).1 (Zcomb.isGraph n) hall

end theorem_7_4

theorem theorem_7_4 :
    (∀ A n, (arrowE (arrowE A A) (arrowE A A)).mem (Zcomb n)) ∧
      ∀ z,
        (∀ f, funOf z f = funOf z (graph (fun y => funOf f y))) →
        (∀ A, (arrowE (arrowE A A) (arrowE A A)).mem z) →
        ∃ n, z = Zcomb n :=
  ⟨theorem_7_4.i, theorem_7_4.unique⟩

end DomainTheory.DataTypesAsLattices
```

2.9 Acknowledgements and references

Appendix B. Acknowledgments and references. My greatest overall debt is to the late Christopher Strachey, who provided not only the initial stimulus and continuing encouragement, but also what may be termed the necessary irritation. Not being a trained mathematician, he often assumed that various operations made sense without looking too closely or rigorously at the details. This was particularly the case with the λ-calculus, which he used as freely as everyday algebra. Having repeatedly and outspokenly condemned the λ-calculus as a formal system without clear mathematical foundations, it was up to me to provide some alternative. The first suggestion was a typed system put forward in Scott (1969) (unpublished, but later developed as LCF by Robin Milner and his collaborators). Experience with the type structure of function spaces, which had come to my attention from work in recursion theory by Nerode, Platek and others, soon convinced me that there were many more similar structures than might at first be imagined. In particular, a vague idea about a space with a "dense" basis led quickly to the more direct construction, by inverse limits, of function spaces of "infinite" type that were very reasonable models of the classical "type-free" λ-calculus (as well as many other calculi for other "reflexive domains"). The details can be found in Scott (1971) and Scott (1973b). Algebra was justified, but the work in doing so was tiring and the exact connections with computability were not all that easy to describe.

In the meantime Plotkin (1972) contained suggestions for a "set-theoretical" construction of models, but not much notice was taken of the plan at the time it was circulated—perhaps owing to a fairly sketchy presentation of the precise semantics of the λ-calculus. The present paper evolved particularly from the project of making the connections with ordinary recursion theory easier to comprehend, since a satisfactory theory of computability and programming language semantics had to face this problem. The idea of using sets of integers for a model was first put forward by the author at a meeting at Oberwolfach at Easter in 1973 and in a more definitive form at the Third Scandinavian Logic Symposium shortly thereafter (see Scott (1975a) which is a preliminary and shorter version of this paper). The author gave a report on the model at the Bristol Logic Colloquium in July 1973, but did not submit a paper for the proceedings. A series of several lectures was presented at the Kiel Logic Colloquium in July 1974, covering most of the present paper

which was distributed as a preprint at the meeting. The text (but unfortunately neither acknowledgments nor references) was printed in the proceedings (Springer Lecture Notes in Mathematics, vol. 499). In 1973 after experimentation with definitions somehow forced him into the definition of the model, the author realized that it was essentially the same as Plotkin's idea and, even more surprising, it was already implicit in a very precise form in much earlier work by Myhill–Shepherdson (1955) and Friedberg–Rogers (1959) (see also Rogers (1967)) on *enumeration operators*. What had happened was that Plotkin had not made enough tie-up with recursion theory, and the recursive people had not seen the tie-up with λ-calculus, even though they knew that one could do a lot with such operators. Actually, if the author had taken his own advice in 1971 (see *Continuous lattices*, Scott (1972a, end of § 2)), he would have seen that many spaces have their own continuous-function spaces as computable retracts, a fact which is just exactly the basis for the present construction; but instead he said: "it [the representation as a retract] does not seem to be of too much help in proving theorems."

Over the years in work on λ-calculus and programming language semantics, personal contact and correspondence with a large number of people has been very stimulating and helpful. I must mention particularly de Bakker, Barendregt, Bekic, Blikle, Böhm, Curry, Egli, Engeler, Ershov, Goodman, Hyland, Kreisel, Landin, Milne, Milner, Mosses, Nivat, Park, Plotkin, Reynolds, de Roever, Smyth, Stoy, Tang, Tennent, Wadsworth. (I apologize to those I have inadvertently left out of this list.) In the reference list a very imperfect attempt has been made to collect references directly relevant to the topics of this paper as well as pointers to related areas that may be of inspiration for future work. The list of papers is undoubtedly incomplete, and inaccurate as well, but the author hopes it may be of some use for those seeking orientation. It is a very vexing problem to keep such references up to date. Some remarks toward references and acknowledgments on the specific results in the various sections follow. Felipe Bracho deserves special thanks for help in the preparation of the final manuscript and with the reference list.

Section 1. The relevance of the "positive" or "weak" topology first came to the author's attention through the work of Nerode (1959). Continuous functionals were studied by Kleene and Platek and many other researchers in recursion theory. Monotonicity was particularly stressed by Platek (1964). The graphs and the definition of application are used in the same way by Plotkin (1972) and Rogers (1967, see p. 147). The fixed-point theorem is very well-known. See, e.g., Tarski (1955). The extension theorem was formulated by the author, but it is very similar to many results in point-set topology; it was used in a prominent way in Scott (1972a) to characterize continuous lattices. The embedding theorem is well-known; see, e.g., Čech (1966).

Section 2. The language LAMBDA is due to the author. Note in particular that Plotkin and Rogers do not define λ-abstraction, even though they know of the existence of many combinators and *could have* defined abstraction if anyone had ever asked them. In particular, they understood about conversion in many instances. The reduction and combinator theorems are well known from combinatory logic and can be found in any reference. The first recursion theorem is basic to all of elementary recursion theory; what is new here is the adaptation of David Park's proof (Park (1970c), unpublished) to the present model to show that Curry's "paradoxical" combinator actually does the recursion. The definition of computability and the definability theorem tie up the present theory with the older theory of enumeration operators.

Section 3. The idea of reduction to a few combinators is an old one in combinatory logic; the author only needed to find a small trick (formula (3.1)) which would take care of the arithmetical combinators. The ideas for the Gödel numbering and the proof of the second recursion theorem are standard, as is the proof of the incompleteness theorem. It only looks a little different since we combine arithmetic with the "type-free" combinators. The proof of the completeness theorem for definability (Theorem 3.5) is taken directly from Myhill-Shepherdson (1955). The author is indebted to Hyland for pointing this out. The subalgebra theorem

is an easy reformulation of talk about enumeration degrees: for more information on such degrees consult Rogers (1967), Sasso (1975), and also Gutteridge (1971). The area is underdeveloped as compared to Turing degrees. Semigroups of combinators have been discussed by Church and Böhm.

Section 4. The notion of a *retract* is common in topology, but the idea of using them to define data types and of having a calculus of computable retracts is original with the author. Of course the connection between lattices and fixed points was known; more about lattices is to be found in Scott (1972a). The various operations on retracts and the idea of using fixed-point equations to define retracts recursively are due to the author. Applications to semantics were given in Scott (1971) for flow diagrams, and this has been followed up by many people, in particular Goguen, et al. (1975) and Reynolds (1974b).

Section 5. Algebraic lattices have been known for a long time (see Gratzer (1968)) and also closure operations (see, e.g., Tarski (1930)). It was Per Martin-Löf and Peter Hancock who suggested that they might form a "universe"; in particular the construction of $\mathbf{V}$ is essentially due to them. The limit theorem is due to the author.

Section 6. More information on the classification by notions in descriptive set theory of various subsets can be found in the work of Tang who also makes

Section 6. More information on the classification by notions in descriptive set theory of various subsets can be found in the work of Tang who also makes connections with the work of Wadge. The various normal forms for the classes of sets (e.g., Table 3) are due to the author.

Section 7. Functionality has been studied for some time in combinatory logic (see, e.g., Hindley, et al. (1972) for an introduction). The author had the idea to see what it all means in the models; there are, of course, connections going back to Curry and Kleene, with functional interpretations of intuitionistic logic (cf. Theorem 7.3, which is well-known). The proof of Theorem 7.4 is due to Plotkin.

Retracts (Theorem 4.1). After the main body of the paper was written, Y. L. Ershov solved the author's problem about the space of retracts. Ershov's proof is presented after the discussion of the proof of Theorem 4.1 in the Retracts section. Quite independently Hosono and Sato (1975) found almost exactly the same proof. Before corresponding with Ershov, the author was totally unaware of the connections with and the importance of Ershov's extensive work in "numeration" theory (see citations in the reference list).

All defects are due to the author.

3 Neighborhood Systems (1980)

Dependency diagram. Each box is one section. The arrowhead is on the section that imports, and the number on it is how many import lines run that way. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it has no arrow.

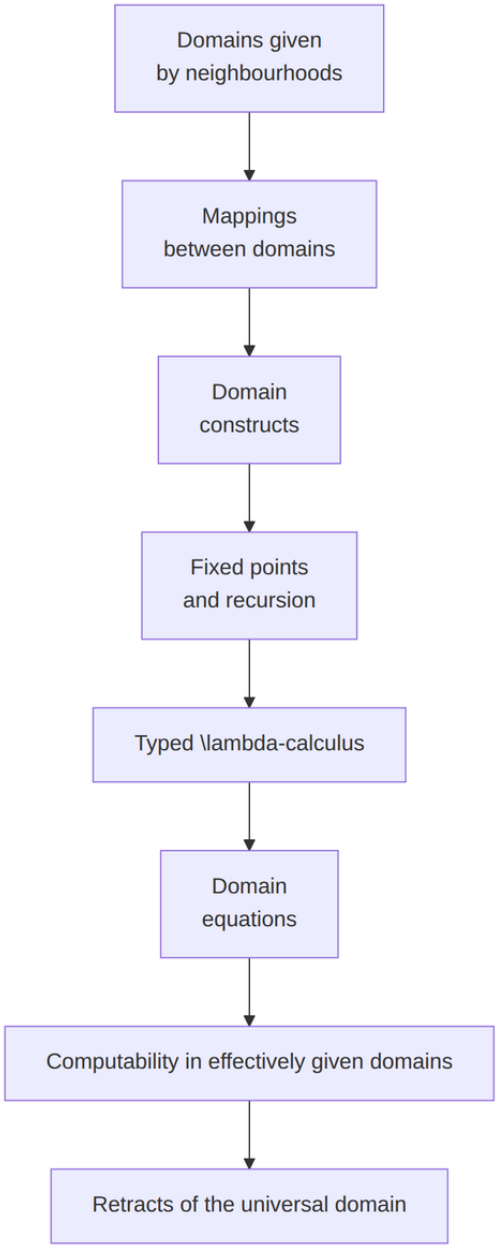

Figure 38: Neighborhood Systems (1980).

3.1 Introduction

These notes were written in conjunction with the lectures delivered by me for the Semantics of Programming Languages sequence during Michaelmas Term 1980 at Oxford. I started writing around the first week of October and finished at the end of November. The purpose of the course was to provide the foundations needed for the method of denotational semantics; in particular, I wanted to make the connections with recursive function theory more definite and to show explicit, effectively given solutions to domain equations. Roughly, these chapters cover the first half of the book of J.E. Stoy. I plan soon to expand the notes into a book by adding additional chapters on other theoretical topics that time did not permit me to cover in one eight-week term.

When I started writing Lecture I in October, I did not know what the later lectures would contain: I could see no further ahead than part of Lecture III in the beginning. The lectures had to be typed in advance of the class meetings, however, so there was at the time of composition no opportunity for second thoughts of any major proportions: I had to write the text straight through. As a consequence there are many remarks I would like to transpose and many additional points of explanation I see are needed; further worked examples and easier exercises are also required. During the spring, after receiving many helpful comments, I was able to introduce a few changes in the text and make some necessary corrections. However, a complete retyping was impossible. Nevertheless, this preliminary version of the book seems to provide a quite detailed introduction and is sufficient to exhibit the scope of the approach and several applications.

The idea of using neighbourhood systems to give set-theoretical representations of domains had been in the back of

my mind for some time in connection with specific examples. But the thought that a systematic development along these lines might be easier to follow than the more abstract lattice-theoretic and topological approach used by myself and others in many publications only came to me during the IFIP Working Group 2.2 meeting in Copenhagen in mid-June 1980. I gave a brief public presentation at ICALP '80 in Holland in mid-July.

One large mistake I have made is to de-emphasize partial orderings too much, since at the right point the concepts and the language are in fact helpful. The basic plan is that, instead of axiomatizing the theory using partial orderings, the necessary facts come out as *theorems*. For a neighbourhood system $\mathcal{D}$, the set of elements $|\mathcal{D}|$, which consists of filters, is naturally partially ordered. And approximable mappings naturally *preserve* the ordering. And so on. The advantage I see from the point of view of exposition is that properties can be brought out one at a time instead of having to put them down all in advance of any experience with the ideas. My own feeling after writing these chapters is that the plan has worked out far better than I could have dared to hope. I was especially glad that I could generate so many *exercises*, and I hope eventually to provide many more. One interesting place at which partial orderings prove their usefulness is in visualizing domains. As it stands now the text does not contain enough in the way of pictures. This will have to be remedied in a future version. Undoubtedly to include enough explanation, several of the lectures will have to be sub-divided into separate chapters.

One major improvement is needed: to bring Exercise 2.22 into the main text. I did not know in advance how often I would need this result for giving (easy) set-theoretical characterizations of domains and structure on them. This will be an easy repair, but it will cause quite a bit of rewriting. Clearly

much more has to be said about the interplay between elements and neighbourhoods. In particular, the character of the elements of a domain, like the power set of a set, has not been sufficiently illustrated, and quite a bit of expansion on this topic is also needed.

Finally I have to explain that I had no time whatsoever to put in references and a bibliography. The ideas I have used have occurred to many, many people who have worked on domains, and I do not wish to claim

originality. I *am* claiming some advantage to my style of representation, but I fully realize that a published version will have to have detailed historical references and notes at the ends of the lectures. Needless to say I should very much appreciate any advice or criticism from readers of this preliminary version.

I would like to give a warm word of thanks to the many people who have already commented on the preliminary text both at Oxford and in Boston, where I gave lectures. Very special thanks are due to Steve Comer and Steve Brookes, who spent many hours proof reading the typescripts. The biggest word of thanks, however, is reserved for Elsie Hinkes who, under very considerable pressure, did a wonderful job of typing.

Dana S. Scott
Merton College
Oxford
May 1981

3.2 Domains given by neighbourhoods

Dependency diagram. Each box is one item. The arrowhead is on the item that imports. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it is not shown. Blue is a definition, green a factoid, amber an example, red a theorem, and indigo an exercise.

Figure 39: Domains given by neighbourhoods.

3.2.1 Introduction

LECTURE I DOMAINS GIVEN BY NEIGHBOURHOODS

Often an object (or element) can be determined by a selection of its properties. Often it is also the case that it is easier (more convenient, more elementary) to think of these properties than it is to think of the elements themselves. Let us term the properties under consideration *neighbourhoods*, the family of those allowed a *neighbourhood system*.

Generally, the collection of these neighbourhoods is, for one reason or another, somewhat restricted; that is, a completely arbitrary property may not be allowable as a neighbourhood. Therefore, the elements determined by selections of neighbourhoods may not be as separable into the discrete objects common to the classical view of set theory. This is particularly true in working with infinite objects: it is hard to specify an infinite element completely. The theory of elements to be studied here, then, is going to permit *partial elements* as well as *total elements*, and each neighbourhood system will define a *domain* of such elements.

Since we may wish to use a neighbourhood system to introduce elements not previously investigated, the neighbourhoods do not have to be regarded as sets of the as-yet-to-be-defined objects. We can take a non-empty set Δ of *tokens* (or "traces") that function as "parts" of elements — or even as parts of "descriptions" of elements. Then a neighbourhood is a subset $X \subseteq \Delta$ containing all those tokens that provide sufficient

information when taken together to "approximate" a possible element up to a certain "degree". All these words in inverted commas are vague, and in any case we shall have at the start only a *qualitative* theory of "degree of approximation". A token should be considered as a very "rough" representative of an element, and a neighbourhood should be regarded as "smoothing out" irrelevant details by grouping together *all* those representatives sharing some common feature. One neighbourhood, then,

may be only a very incomplete specification of an (ideal) element; fuller specifications can be secured by taking "convergent" sequences of neighbourhoods. Even then convergence need not be to a total element.

Let us call the family of allowed neighbourhoods $\mathcal{D}$; it is a family of subsets of the set Δ. An obvious first question is: when are two neighbourhoods $X, Y \in \mathcal{D}$ neighbourhoods of the "same" element? This question of course generalizes to a (finite) sequence of neighbourhoods. This property we will call the *consistency* of the sequence of neighbourhoods. By definition this will mean that the given neighbourhoods all contain a common neighbourhood in $\mathcal{D}$. That is, for X, Y to be consistent, there must be a $Z \in \mathcal{D}$ with $Z \subseteq X$ and $Z \subseteq Y$. This is not a very informative definition, but it has something of the flavour of a notion of consistency insofar as it can be expressed within $\mathcal{D}$. When consistency holds it seems reasonable enough at first glance to say that the intersection $X \cap Y$ is also an approximation to this common element. If this is reasonable, then $X \cap Y$ should also be regarded as a neighbourhood. This assumption has many consequences, but as a preliminary theory of approximation we will find it quite workable with many natural instances. Taking intersections just means taking more and more properties of the element and putting them together "conjunctively". It is something we do all the time. We therefore accept the idea for the present for giving our first principal definition.

3.2.2 Definition 1.1 — neighbourhood system

DEFINITION 1.1. A family $\mathcal{D}$ of subsets of a given set Δ is called a *neighbourhood system* (over Δ) iff it is a non-empty family closed under the intersection of finite consistent sequences of neighbourhoods. That is to say, $\mathcal{D}$ must fulfill these two conditions:

(i) $\Delta \in \mathcal{D}$;

(ii) whenever $X, Y, Z \in \mathcal{D}$ and $Z \subseteq X \cap Y$, then $X \cap Y \in \mathcal{D}$. □

We remark that by convention Δ corresponds to the intersection of an empty sequence of neighbourhoods; in particular, see Factoid 1.1.

NeighborhoodSystem.lean

```
module

public import Mathlib.Algebra.Order.Archimedean.Real.Basic
public import Mathlib.Basic.Countable.Defs
public import Mathlib.Basic.Real.Basic
public import Mathlib.Data.Fintype.Powerset
public import Mathlib.Data.List.Infix
public import Mathlib.Data.Rat.Cast.Order
public import Mathlib.Data.Set.Basic
public import Mathlib.Data.Set.Finite.Basic
public import Mathlib.Order.Bounds.Basic
public import Mathlib.Order.Hom.Basic
public import Mathlib.Order.Monotone.Basic
public import Mathlib.Order.UpperLower.Basic
```

```
public import Mathlib.Order.Zorn
public import Mathlib.RingTheory.Ideal.Span
public import Mathlib.Tactic
public import Mathlib.Topology.Inseparable

@[expose] public section

section

namespace DomainTheory.NeighbourhoodSystems

structure NeighborhoodSystem (α : Type*) where

  mem : Set α → Prop

  master : Set α

  master_nonempty : master.Nonempty

  master_mem : mem master

  inter_mem : ∀ {X Y Z : Set α}, mem X → mem Y → mem Z → Z ⊆ X ∩ Y → mem (X ∩ Y)

  sub_master : ∀ {X : Set α}, mem X → X ⊆ master

end DomainTheory.NeighbourhoodSystems
end
```

3.2.3 Factoid 1.1 — empty intersection is delta; recursive finite intersection

Factoid_1_1.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_19

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

def interUpTo (V : NeighborhoodSystem α) (X : ℕ → Set α) : ℕ → Set α
  | 0 => V.master
  | (n + 1) => interUpTo V X n ∩ X n

@[simp] theorem interUpTo_zero (X : ℕ → Set α) : V.interUpTo X 0 = V.master := rfl

@[simp] theorem interUpTo_succ (X : ℕ → Set α) (n : ℕ) :
    V.interUpTo X (n + 1) = V.interUpTo X n ∩ X n := rfl
```

```
def Consistent (X : ℕ → Set α) (n : ℕ) : Prop :=
  ∃ Z, V.mem Z ∧ Z ⊆ V.interUpTo X n

def element_le (x y : V.Element) : Prop :=
  ∀ X, x.mem X → y.mem X

theorem element_le_refl (x : V.Element) : ∀ X, x.mem X → x.mem X :=
  fun _ h => h

theorem element_le_trans (x y z : V.Element)
    (hxy : ∀ X, x.mem X → y.mem X) (hyz : ∀ X, y.mem X → z.mem X) :
    ∀ X, x.mem X → z.mem X :=
  fun X h => hyz X (hxy X h)

theorem Element.ext {x y : V.Element} (h : ∀ X, x.mem X ↔ y.mem X) : x = y := by
  rcases x with ⟨xmem, _, _, _, _⟩
  rcases y with ⟨ymem, _, _, _, _⟩
  have hmem : xmem = ymem := funext fun X => propext (h X)
  subst hmem
  rfl

theorem element_le_antisymm (x y : V.Element)
    (hxy : ∀ X, x.mem X → y.mem X) (hyx : ∀ X, y.mem X → x.mem X) :
    x = y :=
  @Element.ext α V x y fun X => ⟨hxy X, hyx X⟩

instance : PartialOrder V.Element where
  le := element_le V
  le_refl := element_le_refl V
  le_trans := element_le_trans V
  le_antisymm := element_le_antisymm V

def SeqEquiv (X Y : ℕ → Set α) : Prop :=
  (∀ m, ∃ n, X n ⊆ Y m) ∧ (∀ n, ∃ m, Y m ⊆ X n)

def limitFamily (X : ℕ → Set α) : Set (Set α) := {Z | V.mem Z ∧ ∃ n, X n ⊆ Z}
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
end
```

Factoid 1.1a — empty intersection is delta

$$\bigcap_{i<n} X_i = \Delta, \text{ if } n = 0;$$

Factoid 1.1b — recursive finite intersection

$$= \left(\bigcap_{i<n-1} X_i \right) \cap X_{n-1}, \text{ if } n > 0.$$

Of course, from (ii), we can extend the intersection property to any finite sequence. Consequently, we can say $X_0, \ldots, X_{n-1}$ is consistent in $\mathcal{D}$ iff

$$\bigcap_{i<n} X_i \in \mathcal{D}.$$

Some examples will help us understand the notions better.

3.2.4 Example 1.2 — two-token domain

Example_1_2.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.DomainIso

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems.Example12

abbrev Token := Fin 2

def master : Set Token := Set.univ

theorem inter_master (A : Set Token) : A ∩ master = A := by
  rw [master]; exact Set.inter_univ A

theorem master_inter (A : Set Token) : master ∩ A = A := by
  rw [master]; exact Set.univ_inter A

def one : Set Token := {1}

theorem master_not_subset_one : ¬master ⊆ one := by
  intro h
  have : (0 : Token) ∈ one := h (by simp [master])
  simp [one] at this

def zero : Set Token := {0}

theorem master_not_subset_zero : ¬master ⊆ zero := by
  intro h
  have : (1 : Token) ∈ zero := h (by simp [master])
  simp [zero] at this

def memSet : Set (Set Token) := {master, zero, one}

def mem (X : Set Token) : Prop := X ∈ memSet

theorem mem_master : mem master := by simp [mem, memSet, master, zero, one]

theorem mem_one : mem one := by simp [mem, memSet, master, zero, one]

theorem mem_zero : mem zero := by simp [mem, memSet, master, zero, one]
```

```
theorem mem_iff (X : Set Token) : mem X ↔ X = master ∨ X = zero ∨ X = one := by
  constructor
  · intro h
    simp [mem, memSet, master, zero, one] at h
    rcases h with rfl | rfl | rfl
    · exact Or.inl rfl
    · exact Or.inr (Or.inl rfl)
    · exact Or.inr (Or.inr rfl)
  · intro h
    rcases h with rfl | rfl | rfl
    · exact mem_master
    · exact mem_zero
    · exact mem_one

theorem eq_of_master_subset {Y : Set Token} (h : mem Y) (hsub : master ⊆ Y) : Y =
    master := by
  rcases (mem_iff Y).mp h with rfl | hzero | hone
  · rfl
  · exact absurd hzero (fun h' => master_not_subset_zero (h' ▸ hsub))
  · exact absurd hone (fun h' => master_not_subset_one (h' ▸ hsub))

theorem not_mem_empty : ¬mem (∅ : Set Token) := by
  intro h
  rcases (mem_iff (∅ : Set Token)).mp h with h | h | h
  · rw [master] at h; exact Set.empty_ne_univ h
  · simp [zero] at h
  · simp [one] at h

theorem one_inter_zero : one ∩ zero = (∅ : Set Token) := by
  ext t; fin_cases t <;> simp [zero, one]

theorem one_not_subset_zero : ¬one ⊆ zero := by
  intro h
  have : (1 : Token) ∈ zero := h (by simp [one])
  simp [zero] at this

theorem zero_inter_one : zero ∩ one = (∅ : Set Token) := by
  ext t; fin_cases t <;> simp [zero, one]

theorem inter_eq (X Y : Set Token) (h : mem X) (h' : mem Y) :
    X ∩ Y = master ∨ X ∩ Y = zero ∨ X ∩ Y = one ∨ X ∩ Y = (∅ : Set Token) := by
  rcases (mem_iff X).mp h with rfl | rfl | rfl <;>
    rcases (mem_iff Y).mp h' with rfl | rfl | rfl
  · exact Or.inl (master_inter _)
  · exact Or.inr (Or.inl (master_inter _))
  · exact Or.inr (Or.inr (Or.inl (master_inter _)))
  · exact Or.inr (Or.inl (inter_master _))
  · exact Or.inr (Or.inl (Set.inter_self _))
  · exact Or.inr (Or.inr (Or.inr zero_inter_one))
  · exact Or.inr (Or.inr (Or.inl (inter_master _)))
  · exact Or.inr (Or.inr (Or.inr one_inter_zero))
  · exact Or.inr (Or.inr (Or.inl (Set.inter_self _)))

def neighborhoodSystem : NeighborhoodSystem Token where
  mem
  master
```

```
  master_nonempty := Set.univ_nonempty
  master_mem := mem_master
  sub_master := fun _ => Set.subset_univ _
  inter_mem := by
    intro X Y Z hX hY hZ hZsub
    rcases inter_eq X Y hX hY with h | h | h | h
    · rw [h]; exact mem_master
    · rw [h]; exact mem_zero
    · rw [h]; exact mem_one
    · rw [h] at hZsub
      have hz : Z = (∅ : Set Token) := Set.subset_empty_iff.mp hZsub
      subst hz
      exact absurd hZ not_mem_empty

namespace neighborhoodSystem
section

open NeighborhoodSystem

def bot : neighborhoodSystem.Element where
  mem X := X = master
  sub h := by rw [h]; exact mem_master
  master_mem := rfl
  inter_mem := by
    intro X Y hX hY
    rw [hX, hY, master_inter]
  up_mem := by
    intro X Y hX hY hXY
    rw [hX] at hXY
    exact eq_of_master_subset hY hXY

def elemOne : neighborhoodSystem.Element where
  mem X := X = master ∨ X = one
  sub h := by
    rcases h with rfl | rfl
    · exact mem_master
    · exact mem_one
  master_mem := Or.inl rfl
  inter_mem := by
    intro X Y hX hY
    rcases hX with rfl | rfl <;> rcases hY with rfl | rfl
    · exact Or.inl (master_inter _)
    · exact Or.inr (master_inter _)
    · exact Or.inr (inter_master _)
    · exact Or.inr (Set.inter_self _)
  up_mem := by
    intro X Y hX hY hXY
    rcases hX with rfl | rfl
    · exact Or.inl (eq_of_master_subset hY hXY)
    · rcases (mem_iff Y).mp hY with rfl | rfl | rfl
      · exact Or.inl rfl
      · exact absurd hXY one_not_subset_zero
      · exact Or.inr rfl
end

end neighborhoodSystem
```

```
theorem zero_not_subset_one : ¬zero ⊆ one := by
  intro h
  have : (0 : Token) ∈ one := h (by simp [zero])
  simp [one] at this

namespace neighborhoodSystem
section

open NeighborhoodSystem

def elemZero : neighborhoodSystem.Element where
  mem X := X = master ∨ X = zero
  sub h := by
    rcases h with rfl | rfl
    · exact mem_master
    · exact mem_zero
  master_mem := Or.inl rfl
  inter_mem := by
    intro X Y hX hY
    rcases hX with rfl | rfl <;> rcases hY with rfl | rfl
    · exact Or.inl (master_inter _)
    · exact Or.inr (master_inter _)
    · exact Or.inr (inter_master _)
    · exact Or.inr (Set.inter_self _)
  up_mem := by
    intro X Y hX hY hXY
    rcases hX with rfl | rfl
    · exact Or.inl (eq_of_master_subset hY hXY)
    · rcases (mem_iff Y).mp hY with rfl | rfl | rfl
      · exact Or.inl rfl
      · exact Or.inr rfl
      · exact absurd hXY zero_not_subset_one
end

end neighborhoodSystem
theorem zero_ne_master : zero = master := by
  intro h
  have : (1 : Token) ∈ zero := h ▶ (by simp [master])
  simp [zero] at this

theorem one_ne_master : one = master := by
  intro h
  have : (0 : Token) ∈ one := h ▶ (by simp [master])
  simp [one] at this

namespace neighborhoodSystem

open NeighborhoodSystem

theorem mem_zero_of_mem (x : neighborhoodSystem.Element) (h : x.mem zero) :
    x = elemZero := by
  apply Element.ext
  intro X
  constructor
  · intro hx
    rcases (mem_iff X).mp (x.sub hx) with rfl | hzero | hone
```

```
    · exact Or.inl rfl
    · exact Or.inr hzero
    · have hxone : x.mem one := hone ▸ hx
      have := x.inter_mem h hxone
      rw [zero_inter_one] at this
      exact absurd (x.sub this) not_mem_empty
  · intro hx
    rcases hx with rfl | hx
    · exact x.master_mem
    · rw [hx]; exact h

theorem mem_one_of_mem (x : neighborhoodSystem.Element) (h : x.mem one) :
    x = elemOne := by
  apply Element.ext
  intro X
  constructor
  · intro hx
    rcases (mem_iff X).mp (x.sub hx) with rfl | hzero | hone
    · exact Or.inl rfl
    · have hxzero : x.mem zero := hzero ▸ hx
      have := x.inter_mem hxzero h
      rw [zero_inter_one] at this
      exact absurd (x.sub this) not_mem_empty
    · exact Or.inr hone
  · intro hx
    rcases hx with rfl | hx
    · exact x.master_mem
    · rw [hx]; exact h

theorem zero_ne_one : zero = (one : Set Token) := by
  intro h
  have h0 : (0 : Token) ∈ zero := by simp [zero]
  rw [h] at h0
  simp [one] at h0

section

open NeighborhoodSystem

theorem bot_lt_elemOne : bot < elemOne := by
  constructor
  · intro X hx; exact Or.inl hx
  · intro h
    have : bot.mem one := h one (Or.inr rfl)
    have hm : one = master := this
    exact one_ne_master hm

theorem bot_lt_elemZero : bot < elemZero := by
  constructor
  · intro X hx; exact Or.inl hx
  · intro h
    have : bot.mem zero := h zero (Or.inr rfl)
    have hm : zero = master := this
    exact zero_ne_master hm

theorem element_classification (x : neighborhoodSystem.Element) :
```

```
    x = bot ∨ x = elemZero ∨ x = elemOne := by
  by_cases h0 : x.mem zero
  · exact Or.inr (Or.inl (mem_zero_of_mem x h0))
  by_cases h1 : x.mem one
  · exact Or.inr (Or.inr (mem_one_of_mem x h1))
  apply Or.inl
  apply Element.ext
  intro X
  constructor
  · intro hx
    rcases (mem_iff X).mp (x.sub hx) with rfl | hzero | hone
    · rfl
    · exact absurd (hzero ▶ hx) h0
    · exact absurd (hone ▶ hx) h1
  · intro hx
    rw [hx]
    exact x.master_mem

theorem bot_is_unique_partial (x : neighborhoodSystem.Element) :
    x = elemZero → x = elemOne → x = bot := by
  intro hne0 hne1
  rcases element_classification x with hx | hx | hx
  · exact hx
  · exact (hne0 hx).elim
  · exact (hne1 hx).elim

theorem not_elemOne_le_elemZero : ¬ elemOne ≤ elemZero := by
  intro h
  rcases h one (Or.inr rfl) with h' | h'
  · exact one_ne_master h'
  · exact zero_ne_one h'.symm

theorem not_elemZero_le_elemOne : ¬ elemZero ≤ elemOne := by
  intro h
  rcases h zero (Or.inr rfl) with h' | h'
  · exact zero_ne_master h'
  · exact zero_ne_one h'

theorem eq_bot_of_le_elemZero_of_le_elemOne {a : neighborhoodSystem.Element}
    (h0 : a ≤ elemZero) (h1 : a ≤ elemOne) : a = bot := by
  rcases element_classification a with rfl | rfl | rfl
  · rfl
  · exact absurd h1 not_elemZero_le_elemOne
  · exact absurd h0 not_elemOne_le_elemZero
end

end neighborhoodSystem

end DomainTheory.NeighbourhoodSystems.Example12
end
```

EXAMPLE 1.2. Let $\Delta = \{0, 1\}$ and let $\mathcal{D} = \{\{0, 1\}, \{0\}, \{1\}\}$.

In pictures we have:





The intention is that 0 and 1 can be completely specified and that they can be identified with the total elements. As we shall see, there is only one partial element: either we give no information (the neighbourhood $\{0, 1\}$), or we decide between 0 and 1 (by giving $\{0\}$ or $\{1\}$). □

3.2.5 Example 1.3 — three-step chain

Example_1_3.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.DomainIso

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems.Example13

abbrev Token := Fin 3

def master : Set Token := Set.univ

theorem inter_master (A : Set Token) : A ∩ master = A := by
  rw [master]; exact Set.inter_univ A

theorem master_inter (A : Set Token) : master ∩ A = A := by
  rw [master]; exact Set.univ_inter A

def twelve : Set Token := (insert 2 {1} : Set Token)

theorem master_not_subset_twelve : ¬master ⊆ twelve := by
  intro h
  have : (0 : Token) ∈ twelve := h (by simp [master])
  simp [twelve] at this

def two : Set Token := {2}

theorem master_not_subset_two : ¬master ⊆ two := by
  intro h
  have : (0 : Token) ∈ two := h (by simp [master])
  simp [two] at this

def memSet : Set (Set Token) := {master, twelve, two}

def mem (X : Set Token) : Prop := X ∈ memSet

theorem mem_master : mem master := by simp [mem, memSet, master, twelve, two]

theorem mem_twelve : mem twelve := by simp [mem, memSet, master, twelve, two]

theorem mem_two : mem two := by simp [mem, memSet, master, twelve, two]
```

```
theorem mem_iff (X : Set Token) : mem X ↔ X = master ∨ X = twelve ∨ X = two := by
  constructor
  · intro h
    simp [mem, memSet, master, twelve, two] at h
    rcases h with rfl | rfl | rfl
    · exact Or.inl rfl
    · exact Or.inr (Or.inl rfl)
    · exact Or.inr (Or.inr rfl)
  · intro h
    rcases h with rfl | rfl | rfl
    · exact mem_master
    · exact mem_twelve
    · exact mem_two

theorem eq_of_master_subset {Y : Set Token} (h : mem Y) (hsub : master ⊆ Y) : Y =
    master := by
  rcases (mem_iff Y).mp h with rfl | htwelve | htwo
  · rfl
  · exact absurd htwelve (fun h' => master_not_subset_twelve (h' ▸ hsub))
  · exact absurd htwo (fun h' => master_not_subset_two (h' ▸ hsub))

theorem twelve_inter_two : twelve ∩ two = two := by
  ext t
  fin_cases t <;> simp [twelve, two]

theorem twelve_not_subset_two : ¬twelve ⊆ two := by
  intro h
  have : (1 : Token) ∈ two := h (by simp [twelve])
  simp [two] at this

theorem two_inter_twelve : two ∩ twelve = two := by
  ext t
  fin_cases t <;> simp [twelve, two]

theorem inter_eq (X Y : Set Token) (h : mem X) (h' : mem Y) :
    X ∩ Y = master ∨ X ∩ Y = twelve ∨ X ∩ Y = two := by
  rcases (mem_iff X).mp h with rfl | rfl | rfl <;>
    rcases (mem_iff Y).mp h' with rfl | rfl | rfl
  · exact Or.inl (master_inter _)
  · exact Or.inr (Or.inl (master_inter _))
  · exact Or.inr (Or.inr (master_inter _))
  · exact Or.inr (Or.inl (inter_master _))
  · exact Or.inr (Or.inl (Set.inter_self _))
  · exact Or.inr (Or.inr (twelve_inter_two))
  · exact Or.inr (Or.inr (inter_master _))
  · exact Or.inr (Or.inr (two_inter_twelve))
  · exact Or.inr (Or.inr (Set.inter_self _))

def neighborhoodSystem : NeighborhoodSystem Token where
  mem
  master
  master_nonempty := Set.univ_nonempty
  master_mem := mem_master
  sub_master := fun _ => Set.subset_univ _
  inter_mem := by
    intro X Y Z hX hY hZ hZsub
```

```
    rcases inter_eq X Y hX hY with h | h | h
    · rw [h]; exact mem_master
    · rw [h]; exact mem_twelve
    · rw [h]; exact mem_two

namespace neighborhoodSystem
section

open NeighborhoodSystem

def bot : neighborhoodSystem.Element where
  mem X := X = master
  sub h := by rw [h]; exact mem_master
  master_mem := rfl
  inter_mem := by
    intro X Y hX hY
    rw [hX, hY, master_inter]
  up_mem := by
    intro X Y hX hY hXY
    rw [hX] at hXY
    exact eq_of_master_subset hY hXY

def elemTwelve : neighborhoodSystem.Element where
  mem X := X = master ∨ X = twelve
  sub h := by
    rcases h with rfl | rfl
    · exact mem_master
    · exact mem_twelve
  master_mem := Or.inl rfl
  inter_mem := by
    intro X Y hX hY
    rcases hX with rfl | rfl <;> rcases hY with rfl | rfl
    · exact Or.inl (master_inter _)
    · exact Or.inr (master_inter _)
    · exact Or.inr (inter_master _)
    · exact Or.inr (Set.inter_self _)
  up_mem := by
    intro X Y hX hY hXY
    rcases hX with rfl | rfl
    · exact Or.inl (eq_of_master_subset hY hXY)
    · rcases (mem_iff Y).mp hY with rfl | rfl | rfl
      · exact Or.inl rfl
      · exact Or.inr rfl
      · exact absurd hXY twelve_not_subset_two

def elemTwo : neighborhoodSystem.Element where
  mem X := X = master ∨ X = twelve ∨ X = two
  sub h := by
    rcases h with rfl | rfl | rfl
    · exact mem_master
    · exact mem_twelve
    · exact mem_two
  master_mem := Or.inl rfl
  inter_mem := by
    intro X Y hX hY
    rcases hX with rfl | rfl | rfl <;> rcases hY with rfl | rfl | rfl
```

```
    · exact Or.inl (master_inter _)
    · exact Or.inr (Or.inl (master_inter _))
    · exact Or.inr (Or.inr (master_inter _))
    · exact Or.inr (Or.inl (inter_master _))
    · exact Or.inr (Or.inl (Set.inter_self _))
    · exact Or.inr (Or.inr (twelve_inter_two))
    · exact Or.inr (Or.inr (inter_master _))
    · exact Or.inr (Or.inr (two_inter_twelve))
    · exact Or.inr (Or.inr (Set.inter_self _))
  up_mem := by
    intro X Y hX hY hXY
    rcases hX with rfl | rfl | rfl
    · exact Or.inl (eq_of_master_subset hY hXY)
    · rcases (mem_iff Y).mp hY with rfl | rfl | rfl
      · exact Or.inl rfl
      · exact Or.inr (Or.inl rfl)
      · exact Or.inr (Or.inr rfl)
    · rcases (mem_iff Y).mp hY with rfl | rfl | rfl
      · exact Or.inl rfl
      · exact Or.inr (Or.inl rfl)
      · exact Or.inr (Or.inr rfl)
end

end neighborhoodSystem
theorem twelve_ne_master : twelve = master := by
  intro h
  have hmem : (0 : Token) ∈ twelve := by
    rw [h]
    simp [master]
  simp [twelve] at hmem

theorem two_ne_master : two = master := by
  intro h
  have hmem : (0 : Token) ∈ two := by
    rw [h]
    simp [master]
  simp [two] at hmem

theorem two_ne_twelve : two = twelve := by
  intro h
  have hmem : (1 : Token) ∈ two := by
    rw [h]
    simp [twelve]
  simp [two] at hmem

namespace neighborhoodSystem

open NeighborhoodSystem

theorem two_subset_twelve : two ⊆ twelve := by
  intro t ht
  fin_cases t <;> simp [two, twelve] at ht ⊢

theorem mem_two_of_mem (x : neighborhoodSystem.Element) (h : x.mem two) :
    x = elemTwo := by
  apply Element.ext
```

```
  intro X
  constructor
  · intro hx
    rcases (mem_iff X).mp (x.sub hx) with rfl | hX12 | htwo
    · exact Or.inl rfl
    · rw [hX12]; exact Or.inr (Or.inl rfl)
    · exact Or.inr (Or.inr htwo)
  · intro hx
    rcases hx with rfl | hx | hx
    · exact x.master_mem
    · rw [hx]; exact x.up_mem h mem_twelve two_subset_twelve
    · rw [hx]; exact h

theorem mem_twelve_of_mem (x : neighborhoodSystem.Element) (htwelve : x.mem twelve)
    (htwo : ¬x.mem two) : x = elemTwelve := by
  apply Element.ext
  intro X
  constructor
  · intro hx
    rcases (mem_iff X).mp (x.sub hx) with rfl | hX12 | hX2
    · exact Or.inl rfl
    · exact Or.inr hX12
    · have hxo : x.mem two := hX2 ▶ hx
      have := x.inter_mem htwelve hxo
      rw [twelve_inter_two] at this
      exact absurd this htwo
  · intro hx
    rcases hx with rfl | hx
    · exact x.master_mem
    · rw [hx]; exact htwelve

section

open NeighborhoodSystem

theorem bot_lt_elemTwelve : bot < elemTwelve := by
  constructor
  · intro X hx
    rw [hx]
    exact Or.inl rfl
  · intro h
    have : bot.mem twelve := h twelve (Or.inr rfl)
    exact twelve_ne_master this

theorem elemTwelve_lt_elemTwo : elemTwelve < elemTwo := by
  constructor
  · intro X hx
    rcases hx with rfl | hX12
    · exact Or.inl rfl
    · exact Or.inr (Or.inl hX12)
  · intro h
    exfalso
    have ht := h two (Or.inr (Or.inr rfl))
    rcases ht with h1 | h2
    · exact absurd h1 two_ne_master
    · exact two_ne_twelve h2
```

```
theorem element_classification (x : neighborhoodSystem.Element) :
    x = bot ∨ x = elemTwelve ∨ x = elemTwo := by
  by_cases htwo : x.mem two
  · exact Or.inr (Or.inr (mem_two_of_mem x htwo))
  by_cases htwelve : x.mem twelve
  · exact Or.inr (Or.inl (mem_twelve_of_mem x htwelve htwo))
  apply Or.inl
  apply Element.ext
  intro X
  constructor
  · intro hx
    rcases (mem_iff X).mp (x.sub hx) with rfl | htwelve' | htwo'
    · rfl
    · exact absurd (htwelve' ▶ hx) htwelve
    · exact absurd (htwo' ▶ hx) htwo
  · intro hx
    rw [hx]
    exact x.master_mem

theorem elemTwo_maximal (x : neighborhoodSystem.Element) (h : elemTwo ≤ x) : x =
    elemTwo := by
  rcases element_classification x with rfl | rfl | rfl
  · exfalso
    have : bot.mem twelve := h twelve (Or.inr (Or.inl rfl))
    exact twelve_ne_master this
  · exfalso
    have ht := h two (Or.inr (Or.inr rfl))
    rcases ht with h1 | h2
    · exact absurd h1 two_ne_master
    · exact two_ne_twelve h2
  · rfl
end

end neighborhoodSystem

end DomainTheory.NeighbourhoodSystems.Example13
end
```

EXAMPLE 1.3. Let $\Delta = \{0, 1, 2\}$ and let $\mathcal{D} = \{\{0, 1, 2\}, \{1, 2\}, \{2\}\}$.
In pictures we have:

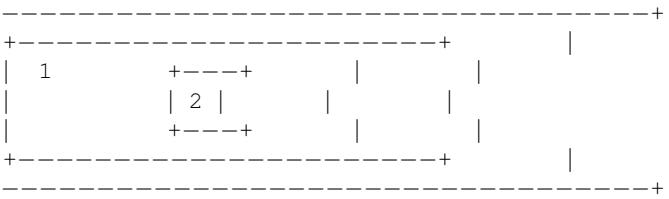

Instead of stepping to the total element (here represented by 2) in one big step, the passage is divided into two steps. (Note 0 and 1 cannot be taken as representing total elements.) This example is not very interesting because the direction of approximation is unique. We need an example with some choice. □

3.2.6 Example 1.4 — finite binary tree

Example_1_4.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.DomainIso

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems.Example14

abbrev Token := Fin 7

def leaf00 : Set Token := {3}

def leaf01 : Set Token := {4}

theorem leaf00_inter_leaf01 : leaf00 ∩ leaf01 = (∅ : Set Token) := by
  ext t; fin_cases t <;> simp [leaf00, leaf01]

theorem leaf01_inter_leaf00 : leaf01 ∩ leaf00 = (∅ : Set Token) := by
  rw [Set.inter_comm]; exact leaf00_inter_leaf01

def leaf10 : Set Token := {5}

theorem leaf00_inter_leaf10 : leaf00 ∩ leaf10 = (∅ : Set Token) := by
  ext t; fin_cases t <;> simp [leaf00, leaf10]

theorem leaf01_inter_leaf10 : leaf01 ∩ leaf10 = (∅ : Set Token) := by
  ext t; fin_cases t <;> simp [leaf01, leaf10]

theorem leaf10_inter_leaf00 : leaf10 ∩ leaf00 = (∅ : Set Token) := by
  rw [Set.inter_comm]; exact leaf00_inter_leaf10

theorem leaf10_inter_leaf01 : leaf10 ∩ leaf01 = (∅ : Set Token) := by
  rw [Set.inter_comm]; exact leaf01_inter_leaf10

def leaf11 : Set Token := {6}

theorem leaf00_inter_leaf11 : leaf00 ∩ leaf11 = (∅ : Set Token) := by
  ext t; fin_cases t <;> simp [leaf00, leaf11]

theorem leaf01_inter_leaf11 : leaf01 ∩ leaf11 = (∅ : Set Token) := by
  ext t; fin_cases t <;> simp [leaf01, leaf11]

theorem leaf10_inter_leaf11 : leaf10 ∩ leaf11 = (∅ : Set Token) := by
  ext t; fin_cases t <;> simp [leaf10, leaf11]

theorem leaf11_inter_leaf00 : leaf11 ∩ leaf00 = (∅ : Set Token) := by
  rw [Set.inter_comm]; exact leaf00_inter_leaf11

theorem leaf11_inter_leaf01 : leaf11 ∩ leaf01 = (∅ : Set Token) := by
  rw [Set.inter_comm]; exact leaf01_inter_leaf11
```

```
theorem leaf11_inter_leaf10 : leaf11 ∩ leaf10 = (∅ : Set Token) := by
  rw [Set.inter_comm]; exact leaf10_inter_leaf11

def left : Set Token := {1, 3, 4}

theorem left_inter_leaf00 : left ∩ leaf00 = leaf00 := by
  ext t; fin_cases t <;> simp [left, leaf00]

theorem leaf00_inter_left : leaf00 ∩ left = leaf00 := by
  rw [Set.inter_comm]; exact left_inter_leaf00

theorem left_inter_leaf01 : left ∩ leaf01 = leaf01 := by
  ext t; fin_cases t <;> simp [left, leaf01]

theorem leaf01_inter_left : leaf01 ∩ left = leaf01 := by
  rw [Set.inter_comm]; exact left_inter_leaf01

theorem left_inter_leaf10 : left ∩ leaf10 = (∅ : Set Token) := by
  ext t; fin_cases t <;> simp [left, leaf10]

theorem leaf10_inter_left : leaf10 ∩ left = (∅ : Set Token) := by
  rw [Set.inter_comm]; exact left_inter_leaf10

theorem left_inter_leaf11 : left ∩ leaf11 = (∅ : Set Token) := by
  ext t; fin_cases t <;> simp [left, leaf11]

theorem leaf11_inter_left : leaf11 ∩ left = (∅ : Set Token) := by
  rw [Set.inter_comm]; exact left_inter_leaf11

def master : Set Token := Set.univ

theorem inter_master (A : Set Token) : A ∩ master = A := by
  rw [master]; exact Set.inter_univ A

theorem master_inter (A : Set Token) : master ∩ A = A := by
  rw [master]; exact Set.univ_inter A

def right : Set Token := {2, 5, 6}

theorem left_inter_right : left ∩ right = (∅ : Set Token) := by
  ext t; fin_cases t <;> simp [left, right]

def memSet : Set (Set Token) := {master, left, right, leaf00, leaf01, leaf10, leaf11}

def mem (X : Set Token) : Prop := X ∈ memSet

theorem mem_leaf00 : mem leaf00 := by
  simp [mem, memSet, master, left, right, leaf00, leaf01, leaf10, leaf11]

theorem mem_leaf01 : mem leaf01 := by
  simp [mem, memSet, master, left, right, leaf00, leaf01, leaf10, leaf11]

theorem mem_leaf10 : mem leaf10 := by
  simp [mem, memSet, master, left, right, leaf00, leaf01, leaf10, leaf11]

theorem mem_leaf11 : mem leaf11 := by
```

```
  simp [mem, memSet, master, left, right, leaf00, leaf01, leaf10, leaf11]

theorem mem_left : mem left := by
  simp [mem, memSet, master, left, right, leaf00, leaf01, leaf10, leaf11]

theorem mem_master : mem master := by
  simp [mem, memSet, master, left, right, leaf00, leaf01, leaf10, leaf11]

theorem mem_right : mem right := by
  simp [mem, memSet, master, left, right, leaf00, leaf01, leaf10, leaf11]

theorem mem_iff (X : Set Token) :
    mem X ↔ X = master ∨ X = left ∨ X = right ∨ X = leaf00 ∨ X = leaf01 ∨ X = leaf10
    ∨ X = leaf11 := by
  constructor
  · intro h
    simpa [mem, memSet] using h
  · intro h
    rcases h with rfl | rfl | rfl | rfl | rfl | rfl | rfl
    · exact mem_master
    · exact mem_left
    · exact mem_right
    · exact mem_leaf00
    · exact mem_leaf01
    · exact mem_leaf10
    · exact mem_leaf11

theorem eq_of_master_subset {Y : Set Token} (hY : mem Y) (h : master ⊆ Y) : Y = master
     := by
  rcases (mem_iff Y).mp hY with rfl | rfl | rfl | rfl | rfl | rfl | rfl
  · rfl
  · exact absurd (h (show (0 : Token) ∈ master by simp [master])) (by simp [left])
  · exact absurd (h (show (0 : Token) ∈ master by simp [master])) (by simp [right])
  · exact absurd (h (show (0 : Token) ∈ master by simp [master])) (by simp [leaf00])
  · exact absurd (h (show (0 : Token) ∈ master by simp [master])) (by simp [leaf01])
  · exact absurd (h (show (0 : Token) ∈ master by simp [master])) (by simp [leaf10])
  · exact absurd (h (show (0 : Token) ∈ master by simp [master])) (by simp [leaf11])

theorem leaf00_subset_cases {Y : Set Token} (hY : mem Y) (h : leaf00 ⊆ Y) :
    Y = master ∨ Y = left ∨ Y = leaf00 := by
  rcases (mem_iff Y).mp hY with rfl | rfl | rfl | rfl | rfl | rfl | rfl
  · exact Or.inl rfl
  · exact Or.inr (Or.inl rfl)
  · exact absurd (h (show (3 : Token) ∈ leaf00 by simp [leaf00])) (by simp [right])
  · exact Or.inr (Or.inr rfl)
  · exact absurd (h (show (3 : Token) ∈ leaf00 by simp [leaf00])) (by simp [leaf01])
  · exact absurd (h (show (3 : Token) ∈ leaf00 by simp [leaf00])) (by simp [leaf10])
  · exact absurd (h (show (3 : Token) ∈ leaf00 by simp [leaf00])) (by simp [leaf11])

theorem leaf01_subset_cases {Y : Set Token} (hY : mem Y) (h : leaf01 ⊆ Y) :
    Y = master ∨ Y = left ∨ Y = leaf01 := by
  rcases (mem_iff Y).mp hY with rfl | rfl | rfl | rfl | rfl | rfl | rfl
  · exact Or.inl rfl
  · exact Or.inr (Or.inl rfl)
  · exact absurd (h (show (4 : Token) ∈ leaf01 by simp [leaf01])) (by simp [right])
  · exact absurd (h (show (4 : Token) ∈ leaf01 by simp [leaf01])) (by simp [leaf00])
```

```
  · exact Or.inr (Or.inr rfl)
  · exact absurd (h (show (4 : Token) ∈ leaf01 by simp [leaf01])) (by simp [leaf10])
  · exact absurd (h (show (4 : Token) ∈ leaf01 by simp [leaf01])) (by simp [leaf11])

theorem leaf10_subset_cases {Y : Set Token} (hY : mem Y) (h : leaf10 ⊆ Y) :
    Y = master ∨ Y = right ∨ Y = leaf10 := by
  rcases (mem_iff Y).mp hY with rfl | rfl | rfl | rfl | rfl | rfl | rfl
  · exact Or.inl rfl
  · exact absurd (h (show (5 : Token) ∈ leaf10 by simp [leaf10])) (by simp [left])
  · exact Or.inr (Or.inl rfl)
  · exact absurd (h (show (5 : Token) ∈ leaf10 by simp [leaf10])) (by simp [leaf00])
  · exact absurd (h (show (5 : Token) ∈ leaf10 by simp [leaf10])) (by simp [leaf01])
  · exact Or.inr (Or.inr rfl)
  · exact absurd (h (show (5 : Token) ∈ leaf10 by simp [leaf10])) (by simp [leaf11])

theorem leaf11_subset_cases {Y : Set Token} (hY : mem Y) (h : leaf11 ⊆ Y) :
    Y = master ∨ Y = right ∨ Y = leaf11 := by
  rcases (mem_iff Y).mp hY with rfl | rfl | rfl | rfl | rfl | rfl | rfl
  · exact Or.inl rfl
  · exact absurd (h (show (6 : Token) ∈ leaf11 by simp [leaf11])) (by simp [left])
  · exact Or.inr (Or.inl rfl)
  · exact absurd (h (show (6 : Token) ∈ leaf11 by simp [leaf11])) (by simp [leaf00])
  · exact absurd (h (show (6 : Token) ∈ leaf11 by simp [leaf11])) (by simp [leaf01])
  · exact absurd (h (show (6 : Token) ∈ leaf11 by simp [leaf11])) (by simp [leaf10])
  · exact Or.inr (Or.inr rfl)

theorem left_subset_cases {Y : Set Token} (hY : mem Y) (h : left ⊆ Y) :
    Y = master ∨ Y = left := by
  rcases (mem_iff Y).mp hY with rfl | rfl | rfl | rfl | rfl | rfl | rfl
  · exact Or.inl rfl
  · exact Or.inr rfl
  · exact absurd (h (show (1 : Token) ∈ left by simp [left])) (by simp [right])
  · exact absurd (h (show (1 : Token) ∈ left by simp [left])) (by simp [leaf00])
  · exact absurd (h (show (1 : Token) ∈ left by simp [left])) (by simp [leaf01])
  · exact absurd (h (show (1 : Token) ∈ left by simp [left])) (by simp [leaf10])
  · exact absurd (h (show (1 : Token) ∈ left by simp [left])) (by simp [leaf11])

theorem not_mem_empty : ¬mem (∅ : Set Token) := by
  intro h
  rcases (mem_iff (∅ : Set Token)).mp h with h | h | h | h | h | h | h
  · have : (0 : Token) ∈ (∅ : Set Token) := by rw [h]; simp [master]
    simp at this
  · have : (1 : Token) ∈ (∅ : Set Token) := by rw [h]; simp [left]
    simp at this
  · have : (2 : Token) ∈ (∅ : Set Token) := by rw [h]; simp [right]
    simp at this
  · have : (3 : Token) ∈ (∅ : Set Token) := by rw [h]; simp [leaf00]
    simp at this
  · have : (4 : Token) ∈ (∅ : Set Token) := by rw [h]; simp [leaf01]
    simp at this
  · have : (5 : Token) ∈ (∅ : Set Token) := by rw [h]; simp [leaf10]
    simp at this
  · have : (6 : Token) ∈ (∅ : Set Token) := by rw [h]; simp [leaf11]
    simp at this

theorem right_inter_leaf00 : right ∩ leaf00 = (∅ : Set Token) := by
```

```
  ext t; fin_cases t <;> simp [right, leaf00]

theorem leaf00_inter_right : leaf00 ∩ right = (∅ : Set Token) := by
  rw [Set.inter_comm]; exact right_inter_leaf00

theorem right_inter_leaf01 : right ∩ leaf01 = (∅ : Set Token) := by
  ext t; fin_cases t <;> simp [right, leaf01]

theorem leaf01_inter_right : leaf01 ∩ right = (∅ : Set Token) := by
  rw [Set.inter_comm]; exact right_inter_leaf01

theorem right_inter_leaf10 : right ∩ leaf10 = leaf10 := by
  ext t; fin_cases t <;> simp [right, leaf10]

theorem leaf10_inter_right : leaf10 ∩ right = leaf10 := by
  rw [Set.inter_comm]; exact right_inter_leaf10

theorem right_inter_leaf11 : right ∩ leaf11 = leaf11 := by
  ext t; fin_cases t <;> simp [right, leaf11]

theorem leaf11_inter_right : leaf11 ∩ right = leaf11 := by
  rw [Set.inter_comm]; exact right_inter_leaf11

theorem right_inter_left : right ∩ left = (∅ : Set Token) := by
  rw [Set.inter_comm]; exact left_inter_right

theorem inter_eq (X Y : Set Token) (hX : mem X) (hY : mem Y) :
    X ∩ Y = master ∨ X ∩ Y = left ∨ X ∩ Y = right ∨ X ∩ Y = leaf00 ∨
      X ∩ Y = leaf01 ∨ X ∩ Y = leaf10 ∨ X ∩ Y = leaf11 ∨ X ∩ Y = (∅ : Set Token) := by
  rcases (mem_iff X).mp hX with rfl | rfl | rfl | rfl | rfl | rfl | rfl <;>
    rcases (mem_iff Y).mp hY with rfl | rfl | rfl | rfl | rfl | rfl | rfl <;>
    simp only [master_inter, inter_master, Set.inter_self,
      left_inter_right, right_inter_left, left_inter_leaf10, leaf10_inter_left,
      left_inter_leaf11, leaf11_inter_left, right_inter_leaf00, leaf00_inter_right,
      right_inter_leaf01, leaf01_inter_right, leaf00_inter_leaf01, leaf01_inter_leaf00
    ,
      leaf00_inter_leaf10, leaf10_inter_leaf00, leaf00_inter_leaf11,
    leaf11_inter_leaf00,
      leaf01_inter_leaf10, leaf10_inter_leaf01, leaf01_inter_leaf11,
    leaf11_inter_leaf01,
      leaf10_inter_leaf11, leaf11_inter_leaf10,
      left_inter_leaf00, leaf00_inter_left, left_inter_leaf01, leaf01_inter_left,
      right_inter_leaf10, leaf10_inter_right, right_inter_leaf11, leaf11_inter_right,
      true_or, or_true]

def neighborhoodSystem : NeighborhoodSystem Token where
  mem
  master
  master_nonempty := Set.univ_nonempty
  master_mem := mem_master
  sub_master := fun _ => Set.subset_univ _
  inter_mem := by
    intro X Y Z hX hY hZ hZsub
    rcases inter_eq X Y hX hY with h | h | h | h | h | h | h | h
    · rw [h]; exact mem_master
    · rw [h]; exact mem_left
```

```
    · rw [h]; exact mem_right
    · rw [h]; exact mem_leaf00
    · rw [h]; exact mem_leaf01
    · rw [h]; exact mem_leaf10
    · rw [h]; exact mem_leaf11
    · rw [h] at hZsub
      have hz : Z = (∅ : Set Token) := Set.subset_empty_iff.mp hZsub
      subst hz
      exact absurd hZ not_mem_empty

namespace neighborhoodSystem
section

open NeighborhoodSystem

def bot : neighborhoodSystem.Element where
  mem X := X = master
  sub h := by rw [h]; exact mem_master
  master_mem := rfl
  inter_mem := by
    intro X Y hX hY
    rw [hX, hY, master_inter]
  up_mem := by
    intro X Y hX hY hXY
    rw [hX] at hXY
    exact eq_of_master_subset hY hXY

def elem00 : neighborhoodSystem.Element where
  mem X := X = master ∨ X = left ∨ X = leaf00
  sub h := by
    rcases h with rfl | rfl | rfl
    · exact mem_master
    · exact mem_left
    · exact mem_leaf00
  master_mem := Or.inl rfl
  inter_mem := by
    intro X Y hX hY
    rcases hX with rfl | rfl | rfl <;> rcases hY with rfl | rfl | rfl
    · exact Or.inl (master_inter _)
    · exact Or.inr (Or.inl (master_inter _))
    · exact Or.inr (Or.inr (master_inter _))
    · exact Or.inr (Or.inl (inter_master _))
    · exact Or.inr (Or.inl (Set.inter_self _))
    · exact Or.inr (Or.inr left_inter_leaf00)
    · exact Or.inr (Or.inr (inter_master _))
    · exact Or.inr (Or.inr leaf00_inter_left)
    · exact Or.inr (Or.inr (Set.inter_self _))
  up_mem := by
    intro X Y hX hY hXY
    rcases hX with rfl | rfl | rfl
    · exact Or.inl (eq_of_master_subset hY hXY)
    · rcases left_subset_cases hY hXY with h | h
      · exact Or.inl h
      · exact Or.inr (Or.inl h)
    · rcases leaf00_subset_cases hY hXY with h | h | h
      · exact Or.inl h
```

```
      · exact Or.inr (Or.inl h)
      · exact Or.inr (Or.inr h)

def elem01 : neighborhoodSystem.Element where
  mem X := X = master ∨ X = left ∨ X = leaf01
  sub h := by
    rcases h with rfl | rfl | rfl
    · exact mem_master
    · exact mem_left
    · exact mem_leaf01
  master_mem := Or.inl rfl
  inter_mem := by
    intro X Y hX hY
    rcases hX with rfl | rfl | rfl <;> rcases hY with rfl | rfl | rfl
    · exact Or.inl (master_inter _)
    · exact Or.inr (Or.inl (master_inter _))
    · exact Or.inr (Or.inr (master_inter _))
    · exact Or.inr (Or.inl (inter_master _))
    · exact Or.inr (Or.inl (Set.inter_self _))
    · exact Or.inr (Or.inr left_inter_leaf01)
    · exact Or.inr (Or.inr (inter_master _))
    · exact Or.inr (Or.inr leaf01_inter_left)
    · exact Or.inr (Or.inr (Set.inter_self _))
  up_mem := by
    intro X Y hX hY hXY
    rcases hX with rfl | rfl | rfl
    · exact Or.inl (eq_of_master_subset hY hXY)
    · rcases left_subset_cases hY hXY with h | h
      · exact Or.inl h
      · exact Or.inr (Or.inl h)
    · rcases leaf01_subset_cases hY hXY with h | h | h
      · exact Or.inl h
      · exact Or.inr (Or.inl h)
      · exact Or.inr (Or.inr h)

def elemZero : neighborhoodSystem.Element where
  mem X := X = master ∨ X = left
  sub h := by
    rcases h with rfl | rfl
    · exact mem_master
    · exact mem_left
  master_mem := Or.inl rfl
  inter_mem := by
    intro X Y hX hY
    rcases hX with rfl | rfl <;> rcases hY with rfl | rfl
    · exact Or.inl (master_inter _)
    · exact Or.inr (master_inter _)
    · exact Or.inr (inter_master _)
    · exact Or.inr (Set.inter_self _)
  up_mem := by
    intro X Y hX hY hXY
    rcases hX with rfl | rfl
    · exact Or.inl (eq_of_master_subset hY hXY)
    · rcases left_subset_cases hY hXY with h | h
      · exact Or.inl h
      · exact Or.inr h
```

```
end

end neighborhoodSystem
theorem right_subset_cases {Y : Set Token} (hY : mem Y) (h : right ⊆ Y) :
    Y = master ∨ Y = right := by
  rcases (mem_iff Y).mp hY with rfl | rfl | rfl | rfl | rfl | rfl | rfl
  · exact Or.inl rfl
  · exact absurd (h (show (2 : Token) ∈ right by simp [right])) (by simp [left])
  · exact Or.inr rfl
  · exact absurd (h (show (2 : Token) ∈ right by simp [right])) (by simp [leaf00])
  · exact absurd (h (show (2 : Token) ∈ right by simp [right])) (by simp [leaf01])
  · exact absurd (h (show (2 : Token) ∈ right by simp [right])) (by simp [leaf10])
  · exact absurd (h (show (2 : Token) ∈ right by simp [right])) (by simp [leaf11])

namespace neighborhoodSystem
section


open NeighborhoodSystem

def elem10 : neighborhoodSystem.Element where
  mem X := X = master ∨ X = right ∨ X = leaf10
  sub h := by
    rcases h with rfl | rfl | rfl
    · exact mem_master
    · exact mem_right
    · exact mem_leaf10
  master_mem := Or.inl rfl
  inter_mem := by
    intro X Y hX hY
    rcases hX with rfl | rfl | rfl <;> rcases hY with rfl | rfl | rfl
    · exact Or.inl (master_inter _)
    · exact Or.inr (Or.inl (master_inter _))
    · exact Or.inr (Or.inr (master_inter _))
    · exact Or.inr (Or.inl (inter_master _))
    · exact Or.inr (Or.inl (Set.inter_self _))
    · exact Or.inr (Or.inr right_inter_leaf10)
    · exact Or.inr (Or.inr (inter_master _))
    · exact Or.inr (Or.inr leaf10_inter_right)
    · exact Or.inr (Or.inr (Set.inter_self _))
  up_mem := by
    intro X Y hX hY hXY
    rcases hX with rfl | rfl | rfl
    · exact Or.inl (eq_of_master_subset hY hXY)
    · rcases right_subset_cases hY hXY with h | h
      · exact Or.inl h
      · exact Or.inr (Or.inl h)
    · rcases leaf10_subset_cases hY hXY with h | h | h
      · exact Or.inl h
      · exact Or.inr (Or.inl h)
      · exact Or.inr (Or.inr h)

def elem11 : neighborhoodSystem.Element where
  mem X := X = master ∨ X = right ∨ X = leaf11
  sub h := by
    rcases h with rfl | rfl | rfl
    · exact mem_master
```

```
    · exact mem_right
    · exact mem_leaf11
  master_mem := Or.inl rfl
  inter_mem := by
    intro X Y hX hY
    rcases hX with rfl | rfl | rfl <;> rcases hY with rfl | rfl | rfl
    · exact Or.inl (master_inter _)
    · exact Or.inr (Or.inl (master_inter _))
    · exact Or.inr (Or.inr (master_inter _))
    · exact Or.inr (Or.inl (inter_master _))
    · exact Or.inr (Or.inl (Set.inter_self _))
    · exact Or.inr (Or.inr right_inter_leaf11)
    · exact Or.inr (Or.inr (inter_master _))
    · exact Or.inr (Or.inr leaf11_inter_right)
    · exact Or.inr (Or.inr (Set.inter_self _))
  up_mem := by
    intro X Y hX hY hXY
    rcases hX with rfl | rfl | rfl
    · exact Or.inl (eq_of_master_subset hY hXY)
    · rcases right_subset_cases hY hXY with h | h
      · exact Or.inl h
      · exact Or.inr (Or.inl h)
    · rcases leaf11_subset_cases hY hXY with h | h | h
      · exact Or.inl h
      · exact Or.inr (Or.inl h)
      · exact Or.inr (Or.inr h)

def elemOne : neighborhoodSystem.Element where
  mem X := X = master ∨ X = right
  sub h := by
    rcases h with rfl | rfl
    · exact mem_master
    · exact mem_right
  master_mem := Or.inl rfl
  inter_mem := by
    intro X Y hX hY
    rcases hX with rfl | rfl <;> rcases hY with rfl | rfl
    · exact Or.inl (master_inter _)
    · exact Or.inr (master_inter _)
    · exact Or.inr (inter_master _)
    · exact Or.inr (Set.inter_self _)
  up_mem := by
    intro X Y hX hY hXY
    rcases hX with rfl | rfl
    · exact Or.inl (eq_of_master_subset hY hXY)
    · rcases right_subset_cases hY hXY with h | h
      · exact Or.inl h
      · exact Or.inr h
end

end neighborhoodSystem
theorem left_ne_master : left = master := by
  intro h
  have hmem : (0 : Token) ∈ left := by rw [h]; simp [master]
  simp [left] at hmem
```

```
theorem right_ne_master : right = master := by
  intro h
  have hmem : (0 : Token) ∈ right := by rw [h]; simp [master]
  simp [right] at hmem

theorem leaf00_ne_master : leaf00 = master := by
  intro h
  have hmem : (0 : Token) ∈ leaf00 := by rw [h]; simp [master]
  simp [leaf00] at hmem

theorem leaf01_ne_master : leaf01 = master := by
  intro h
  have hmem : (0 : Token) ∈ leaf01 := by rw [h]; simp [master]
  simp [leaf01] at hmem

theorem leaf10_ne_master : leaf10 = master := by
  intro h
  have hmem : (0 : Token) ∈ leaf10 := by rw [h]; simp [master]
  simp [leaf10] at hmem

theorem leaf11_ne_master : leaf11 = master := by
  intro h
  have hmem : (0 : Token) ∈ leaf11 := by rw [h]; simp [master]
  simp [leaf11] at hmem

theorem leaf00_ne_left : leaf00 = left := by
  intro h
  have hmem : (1 : Token) ∈ leaf00 := by rw [h]; simp [left]
  simp [leaf00] at hmem

theorem leaf01_ne_left : leaf01 = left := by
  intro h
  have hmem : (1 : Token) ∈ leaf01 := by rw [h]; simp [left]
  simp [leaf01] at hmem

theorem leaf10_ne_right : leaf10 = right := by
  intro h
  have hmem : (2 : Token) ∈ leaf10 := by rw [h]; simp [right]
  simp [leaf10] at hmem

theorem leaf11_ne_right : leaf11 = right := by
  intro h
  have hmem : (2 : Token) ∈ leaf11 := by rw [h]; simp [right]
  simp [leaf11] at hmem

theorem leaf00_subset_left : leaf00 ⊆ left := by
  intro t ht; fin_cases t <;> simp [leaf00, left] at ht ⊢

private theorem leaf01_subset_left : leaf01 ⊆ left := by
  intro t ht; fin_cases t <;> simp [leaf01, left] at ht ⊢

private theorem leaf10_subset_right : leaf10 ⊆ right := by
  intro t ht; fin_cases t <;> simp [leaf10, right] at ht ⊢

private theorem leaf11_subset_right : leaf11 ⊆ right := by
  intro t ht; fin_cases t <;> simp [leaf11, right] at ht ⊢
```

```
namespace neighborhoodSystem

open NeighborhoodSystem

theorem mem_leaf00_imp (x : neighborhoodSystem.Element) (h : x.mem leaf00) :
    x = elem00 := by
  have hleft : x.mem left := x.up_mem h mem_left leaf00_subset_left
  apply Element.ext
  intro X
  constructor
  · intro hx
    rcases (mem_iff X).mp (x.sub hx) with rfl | rfl | rfl | rfl | rfl | rfl | rfl
    · exact Or.inl rfl
    · exact Or.inr (Or.inl rfl)
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (right ∩ leaf00 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    right, leaf00]] at hi
      exact not_mem_empty (x.sub hi)
    · exact Or.inr (Or.inr rfl)
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (leaf01 ∩ leaf00 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    leaf01, leaf00]] at hi
      exact not_mem_empty (x.sub hi)
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (leaf10 ∩ leaf00 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    leaf10, leaf00]] at hi
      exact not_mem_empty (x.sub hi)
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (leaf11 ∩ leaf00 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    leaf11, leaf00]] at hi
      exact not_mem_empty (x.sub hi)
  · intro hx
    rcases hx with rfl | rfl | rfl
    · exact x.master_mem
    · exact hleft
    · exact h

theorem mem_leaf01_imp (x : neighborhoodSystem.Element) (h : x.mem leaf01) :
    x = elem01 := by
  have hleft : x.mem left := x.up_mem h mem_left leaf01_subset_left
  apply Element.ext
  intro X
  constructor
  · intro hx
    rcases (mem_iff X).mp (x.sub hx) with rfl | rfl | rfl | rfl | rfl | rfl | rfl
    · exact Or.inl rfl
    · exact Or.inr (Or.inl rfl)
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (right ∩ leaf01 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    right, leaf01]] at hi
```

```
      exact not_mem_empty (x.sub hi)
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (leaf00 ∩ leaf01 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    leaf00, leaf01]] at hi
      exact not_mem_empty (x.sub hi)
    · exact Or.inr (Or.inr rfl)
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (leaf10 ∩ leaf01 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    leaf10, leaf01]] at hi
      exact not_mem_empty (x.sub hi)
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (leaf11 ∩ leaf01 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    leaf11, leaf01]] at hi
      exact not_mem_empty (x.sub hi)
  · intro hx
    rcases hx with rfl | rfl | rfl
    · exact x.master_mem
    · exact hleft
    · exact h

theorem mem_leaf10_imp (x : neighborhoodSystem.Element) (h : x.mem leaf10) :
    x = elem10 := by
  have hright : x.mem right := x.up_mem h mem_right leaf10_subset_right
  apply Element.ext
  intro X
  constructor
  · intro hx
    rcases (mem_iff X).mp (x.sub hx) with rfl | rfl | rfl | rfl | rfl | rfl | rfl
    · exact Or.inl rfl
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (left ∩ leaf10 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    left, leaf10]] at hi
      exact not_mem_empty (x.sub hi)
    · exact Or.inr (Or.inl rfl)
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (leaf00 ∩ leaf10 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    leaf00, leaf10]] at hi
      exact not_mem_empty (x.sub hi)
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (leaf01 ∩ leaf10 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    leaf01, leaf10]] at hi
      exact not_mem_empty (x.sub hi)
    · exact Or.inr (Or.inr rfl)
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (leaf11 ∩ leaf10 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    leaf11, leaf10]] at hi
      exact not_mem_empty (x.sub hi)
  · intro hx
    rcases hx with rfl | rfl | rfl
```

```
    · exact x.master_mem
    · exact hright
    · exact h

theorem mem_leaf11_imp (x : neighborhoodSystem.Element) (h : x.mem leaf11) :
    x = elem11 := by
  have hright : x.mem right := x.up_mem h mem_right leaf11_subset_right
  apply Element.ext
  intro X
  constructor
  · intro hx
    rcases (mem_iff X).mp (x.sub hx) with rfl | rfl | rfl | rfl | rfl | rfl | rfl
    · exact Or.inl rfl
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (left ∩ leaf11 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    left, leaf11]] at hi
      exact not_mem_empty (x.sub hi)
    · exact Or.inr (Or.inl rfl)
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (leaf00 ∩ leaf11 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    leaf00, leaf11]] at hi
      exact not_mem_empty (x.sub hi)
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (leaf01 ∩ leaf11 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    leaf01, leaf11]] at hi
      exact not_mem_empty (x.sub hi)
    · exfalso
      have hi := x.inter_mem hx h
      rw [show (leaf10 ∩ leaf11 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    leaf10, leaf11]] at hi
      exact not_mem_empty (x.sub hi)
    · exact Or.inr (Or.inr rfl)
  · intro hx
    rcases hx with rfl | rfl | rfl
    · exact x.master_mem
    · exact hright
    · exact h

theorem mem_left_imp (x : neighborhoodSystem.Element) (hl : x.mem left)
    (h00 : ¬x.mem leaf00) (h01 : ¬x.mem leaf01) : x = elemZero := by
  apply Element.ext
  intro X
  constructor
  · intro hx
    rcases (mem_iff X).mp (x.sub hx) with rfl | rfl | rfl | rfl | rfl | rfl | rfl
    · exact Or.inl rfl
    · exact Or.inr rfl
    · exfalso
      have hi := x.inter_mem hl hx
      rw [show (left ∩ right : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    left, right]] at hi
      exact not_mem_empty (x.sub hi)
    · exact absurd hx h00
```

```
    · exact absurd hx h01
    · exfalso
      have hi := x.inter_mem hl hx
      rw [show (left ∩ leaf10 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    left, leaf10]] at hi
      exact not_mem_empty (x.sub hi)
    · exfalso
      have hi := x.inter_mem hl hx
      rw [show (left ∩ leaf11 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    left, leaf11]] at hi
      exact not_mem_empty (x.sub hi)
  · intro hx
    rcases hx with rfl | rfl
    · exact x.master_mem
    · exact hl

theorem mem_right_imp (x : neighborhoodSystem.Element) (hr : x.mem right)
    (h10 : ¬x.mem leaf10) (h11 : ¬x.mem leaf11) : x = elemOne := by
  apply Element.ext
  intro X
  constructor
  · intro hx
    rcases (mem_iff X).mp (x.sub hx) with rfl | rfl | rfl | rfl | rfl | rfl | rfl
    · exact Or.inl rfl
    · exfalso
      have hi := x.inter_mem hr hx
      rw [show (right ∩ left : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    right, left]] at hi
      exact not_mem_empty (x.sub hi)
    · exact Or.inr rfl
    · exfalso
      have hi := x.inter_mem hr hx
      rw [show (right ∩ leaf00 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    right, leaf00]] at hi
      exact not_mem_empty (x.sub hi)
    · exfalso
      have hi := x.inter_mem hr hx
      rw [show (right ∩ leaf01 : Set Token) = ∅ from by ext t; fin_cases t <;> simp [
    right, leaf01]] at hi
      exact not_mem_empty (x.sub hi)
    · exact absurd hx h10
    · exact absurd hx h11
  · intro hx
    rcases hx with rfl | rfl
    · exact x.master_mem
    · exact hr

section

open NeighborhoodSystem

theorem bot_lt_elemOne : bot < elemOne := by
  constructor
  · intro X hx; rw [hx]; exact Or.inl rfl
  · intro h
    exact right_ne_master (h right (Or.inr rfl))
```

```
theorem bot_lt_elemZero : bot < elemZero := by
  constructor
  · intro X hx; rw [hx]; exact Or.inl rfl
  · intro h
    exact left_ne_master (h left (Or.inr rfl))

theorem elem00_maximal (x : neighborhoodSystem.Element) (h : elem00 ≤ x) : x = elem00
    :=
  mem_leaf00_imp x (h leaf00 (Or.inr (Or.inr rfl)))

theorem elem01_maximal (x : neighborhoodSystem.Element) (h : elem01 ≤ x) : x = elem01
    :=
  mem_leaf01_imp x (h leaf01 (Or.inr (Or.inr rfl)))

theorem elem10_maximal (x : neighborhoodSystem.Element) (h : elem10 ≤ x) : x = elem10
    :=
  mem_leaf10_imp x (h leaf10 (Or.inr (Or.inr rfl)))

theorem elem11_maximal (x : neighborhoodSystem.Element) (h : elem11 ≤ x) : x = elem11
    :=
  mem_leaf11_imp x (h leaf11 (Or.inr (Or.inr rfl)))

theorem elemOne_lt_elem10 : elemOne < elem10 := by
  constructor
  · intro X hx
    rcases hx with rfl | rfl
    · exact Or.inl rfl
    · exact Or.inr (Or.inl rfl)
  · intro h
    rcases h leaf10 (Or.inr (Or.inr rfl)) with h1 | h1
    · exact leaf10_ne_master h1
    · exact leaf10_ne_right h1

theorem elemOne_lt_elem11 : elemOne < elem11 := by
  constructor
  · intro X hx
    rcases hx with rfl | rfl
    · exact Or.inl rfl
    · exact Or.inr (Or.inl rfl)
  · intro h
    rcases h leaf11 (Or.inr (Or.inr rfl)) with h1 | h1
    · exact leaf11_ne_master h1
    · exact leaf11_ne_right h1

theorem elemZero_lt_elem00 : elemZero < elem00 := by
  constructor
  · intro X hx
    rcases hx with rfl | rfl
    · exact Or.inl rfl
    · exact Or.inr (Or.inl rfl)


  · intro h
    rcases h leaf00 (Or.inr (Or.inr rfl)) with h1 | h1
    · exact leaf00_ne_master h1
    · exact leaf00_ne_left h1
```

```
theorem elemZero_lt_elem01 : elemZero < elem01 := by
  constructor
  · intro X hx
    rcases hx with rfl | rfl
    · exact Or.inl rfl
    · exact Or.inr (Or.inl rfl)
  · intro h
    rcases h leaf01 (Or.inr (Or.inr rfl)) with h1 | h1
    · exact leaf01_ne_master h1
    · exact leaf01_ne_left h1

theorem element_classification (x : neighborhoodSystem.Element) :
    x = bot ∨ x = elemZero ∨ x = elemOne ∨ x = elem00 ∨ x = elem01 ∨ x = elem10 ∨ x =
    elem11 := by
  by_cases h00 : x.mem leaf00
  · exact Or.inr (Or.inr (Or.inr (Or.inl (mem_leaf00_imp x h00))))
  by_cases h01 : x.mem leaf01
  · exact Or.inr (Or.inr (Or.inr (Or.inr (Or.inl (mem_leaf01_imp x h01)))))
  by_cases h10 : x.mem leaf10
  · exact Or.inr (Or.inr (Or.inr (Or.inr (Or.inr (Or.inl (mem_leaf10_imp x h10))))))
  by_cases h11 : x.mem leaf11
  · exact Or.inr (Or.inr (Or.inr (Or.inr (Or.inr (Or.inr (mem_leaf11_imp x h11))))))
  by_cases hl : x.mem left
  · exact Or.inr (Or.inl (mem_left_imp x hl h00 h01))
  by_cases hr : x.mem right
  · exact Or.inr (Or.inr (Or.inl (mem_right_imp x hr h10 h11)))
  apply Or.inl
  apply Element.ext
  intro X
  constructor
  · intro hx
    rcases (mem_iff X).mp (x.sub hx) with rfl | rfl | rfl | rfl | rfl | rfl | rfl
    · rfl
    · exact absurd hx hl
    · exact absurd hx hr
    · exact absurd hx h00
    · exact absurd hx h01
    · exact absurd hx h10
    · exact absurd hx h11
  · intro hx
    rw [hx]
    exact x.master_mem
end

end neighborhoodSystem

end DomainTheory.NeighbourhoodSystems.Example14
end
```

EXAMPLE 1.4. Let $\Delta = \{\Lambda, 0, 1, 00, 01, 10, 11\}$ and let $\mathcal{D} = \{\Delta, \{0, 00, 01\}, \{1, 10, 11\}, \{00\}, \{01\}, \{10\}, \{11\}\}$. Or more understandably in pictures:



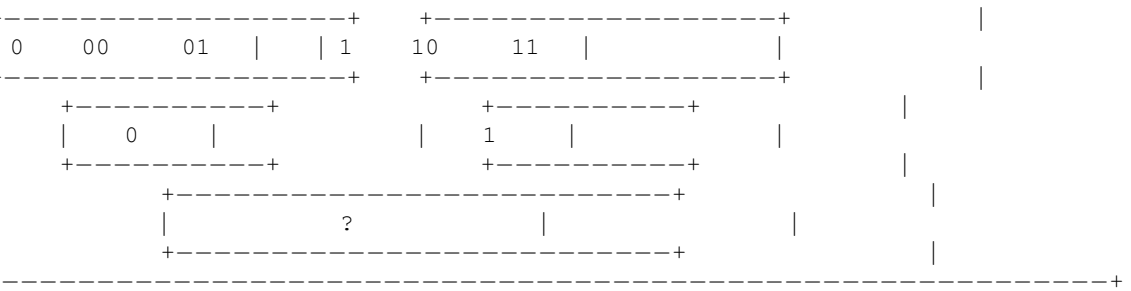

The tokens are finite sequences of 0's and 1's (up to length 2) with Λ the empty sequence; they form — in the picture — the binary tree with the sequences as the nodes. The neighbourhoods are the subtrees of all nodes above a given node. Obviously this can be generalized to sequences of any length (and to trees less regular than the binary tree). The total elements of the example correspond to the top nodes 00, 01, 10, 11 and the lower nodes to the partial elements. When we are not at a top node we have only partially determined a sequence, and the branching indicates that we have some choice as to how the sequence can be extended. □

It should be noted that, in these three examples, the reason that we have a neighbourhood system is a simple consequence of a

Resolutions from the image: "is unique" (not "in unique"); $\mathcal{D}$ begins with Δ, not Λ; Pass 1's nested-box diagram matches the neighborhood boundaries in the scan; em dashes around "in the picture" as in the source.

3.2.7 Factoid 1.4a — nested or disjoint

Factoid_1_4.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_1

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems

def NeighborhoodSystem.ofNestedOrDisjoint {α : Type*} (mem : Set α → Prop) (master :
    Set α)
    (master_nonempty : master.Nonempty) (master_mem : mem master) (hnd :
    NestedOrDisjoint mem)
    (sub_master : ∀ {X : Set α}, mem X → X ⊆ master) : NeighborhoodSystem α where
  mem
  master
  master_nonempty
  master_mem
  sub_master
  inter_mem := by
    intro X Y Z hX hY hZ hZsub
    rcases hnd hX hY with h | h | h
    · rwa [Set.inter_eq_left.mpr h]
    · rwa [Set.inter_eq_right.mpr h]
```

```
    · rw [h]
      rw [h] at hZsub
      rwa [← Set.subset_empty_iff.mp hZsub]

end DomainTheory.NeighbourhoodSystems
end
```

very special circumstance: in these systems two neighbourhoods are either disjoint or one is included in the other. This arrangement of neighbourhoods is by no means necessary.

3.2.8 Example 1.5 — all nonempty subsets

Example_1_5.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.DomainIso

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems.Example15
section

open NeighborhoodSystem

abbrev Token := Fin 4

def P4Mem (X : Set Token) : Prop := X.Nonempty

theorem P4_inter_mem {X Y Z : Set Token} (_hX : P4Mem X) (_hY : P4Mem Y)
    (hZ : P4Mem Z) (hZsub : Z ⊆ X ∩ Y) : P4Mem (X ∩ Y) :=
  hZ.mono hZsub

def master : Set Token := Set.univ

theorem P4_master_mem : P4Mem master := by
  rw [master]; exact Set.univ_nonempty

theorem P4_master_nonempty : master.Nonempty := by
  exact ⟨0, Set.mem_univ 0⟩

theorem P4_sub_master {X : Set Token} (_h : P4Mem X) : X ⊆ master :=
  Set.subset_univ _

def neighborhoodSystem : NeighborhoodSystem Token where
  mem := P4Mem
  master
  master_nonempty := P4_master_nonempty
  master_mem := P4_master_mem
  inter_mem := P4_inter_mem
  sub_master := P4_sub_master

instance P4_countable : Countable {S : Set Token // neighborhoodSystem.mem S} :=
  inferInstance
```

```
end

end DomainTheory.NeighbourhoodSystems.Example15
end
```

EXAMPLE 1.5. Let $\Delta = \{0, 1, 2, 3\}$ and let $\mathcal{D}$ be the family of all non-empty subsets of Δ.

3.2.9 Factoid 1.5 — consistent iff nonempty; equivalent sequences same limit

Factoid_1_5.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Example_1_5

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems

theorem NeighborhoodSystem.ofPositive_isPositive {α : Type*} (mem : Set α → Prop)
    (master : Set α) (master_nonempty : master.Nonempty) (master_mem : mem master)
    (sub_master : ∀ {X : Set α}, mem X → X ⊆ master)
    (pos : ∀ {{X Y : Set α}}, mem X → mem Y → (mem (X ∩ Y) ↔ (X ∩ Y).Nonempty)) :
    (NeighborhoodSystem.ofPositive mem master master_nonempty master_mem sub_master
    pos).IsPositive :=
  pos

namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

theorem interUpTo_subset (X : ℕ → Set α) :
    ∀ {n j : ℕ}, j < n → V.interUpTo X n ⊆ X j := by
  intro n
  induction n with
  | zero => intro j h; exact absurd h (Nat.not_lt_zero j)
  | succ n ih =>
    intro j h
    rw [interUpTo_succ]
    rcases Nat.eq_or_lt_of_le (Nat.lt_succ_iff.mp h) with h' | h'
    · subst h'; exact Set.inter_subset_right
    · exact Set.inter_subset_left.trans (ih h')

theorem interUpTo_mem (X : ℕ → Set α) :
    ∀ {n : ℕ}, (∀ i, i < n → V.mem (X i)) → V.Consistent X n →
      V.mem (V.interUpTo X n) := by
  intro n
  induction n with
  | zero => intro _ _; exact V.master_mem
  | succ n ih =>
    intro hX hcons
    obtain ⟨Z, hZmem, hZsub⟩ := hcons
    have hZsub' : Z ⊆ V.interUpTo X n ∩ X n := by rwa [interUpTo_succ] at hZsub
```

```
    have hconsn : V.Consistent X n :=
      ⟨Z, hZmem, hZsub'.trans Set.inter_subset_left⟩
    have hmemn : V.mem (V.interUpTo X n) :=
      ih (fun i hi => hX i (Nat.lt_succ_of_lt hi)) hconsn
    have hXn : V.mem (X n) := hX n (Nat.lt_succ_self n)
    rw [interUpTo_succ]
    exact V.inter_mem hmemn hXn hZmem hZsub'

theorem consistent_iff_interUpTo_mem (X : ℕ → Set α) {n : ℕ}
    (hX : ∀ i, i < n → V.mem (X i)) :
    V.Consistent X n ↔ V.mem (V.interUpTo X n) := by
  constructor
  · exact V.interUpTo_mem X hX
  · intro h; exact ⟨V.interUpTo X n, h, Set.Subset.refl _⟩

theorem Element.mem_interUpTo {α : Type*} {V : NeighborhoodSystem α} (x : V.Element)
    (X : ℕ → Set α) :
    ∀ {n : ℕ}, (∀ i, i < n → x.mem (X i)) → x.mem (V.interUpTo X n) := by
  intro n
  induction n with
  | zero => intro _; exact x.master_mem
  | succ n ih =>
    intro h
    rw [interUpTo_succ]
    exact x.inter_mem (ih (fun i hi => h i (Nat.lt_succ_of_lt hi))) (h n (Nat.
    lt_succ_self n))

theorem Element.mem_interUpTo_iff {α : Type*} {V : NeighborhoodSystem α} (x : V.
    Element)
    (X : ℕ → Set α) {n : ℕ} (hX : ∀ i, i < n → V.mem (X i)) :
    x.mem (V.interUpTo X n) ↔ ∀ i, i < n → x.mem (X i) := by
  constructor
  · intro h i hi
    exact x.up_mem h (hX i hi) (V.interUpTo_subset X hi)
  · exact x.mem_interUpTo X

theorem limitFamily_eq_iff (X Y : ℕ → Set α)
    (hX : ∀ n, V.mem (X n)) (hY : ∀ m, V.mem (Y m)) :
    V.limitFamily X = V.limitFamily Y ↔ SeqEquiv X Y := by
  constructor
  · intro hEq
    refine ⟨fun m => ?_, fun n => ?_⟩
    · have hmem : Y m ∈ V.limitFamily Y := ⟨hY m, m, subset_rfl⟩
      rw [← hEq] at hmem
      obtain ⟨_, n, hn⟩ := hmem
      exact ⟨n, hn⟩
    · have hmem : X n ∈ V.limitFamily X := ⟨hX n, n, subset_rfl⟩
      rw [hEq] at hmem
      obtain ⟨_, m, hm⟩ := hmem
      exact ⟨m, hm⟩
  · rintro ⟨h1, h2⟩
    apply Set.ext
    intro Z
    constructor
    · rintro ⟨hZ, n, hn⟩
```

```
      obtain ⟨m, hm⟩ := h2 n
      exact ⟨hZ, m, hm.trans hn⟩
    · rintro ⟨hZ, m, hm⟩
      obtain ⟨n, hn⟩ := h1 m
      exact ⟨hZ, n, hn.trans hm⟩

end NeighborhoodSystem

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Example15
section

open NeighborhoodSystem

theorem consistent_iff_inter_nonempty (X : ℕ → Set Token) (n : ℕ) :
    neighborhoodSystem.Consistent X n ↔ (neighborhoodSystem.interUpTo X n).Nonempty :=
     by
  constructor
  · rintro ⟨Z, hZ, hsub⟩
    obtain ⟨z, hz⟩ := hZ
    exact ⟨z, hsub hz⟩
  · intro h
    exact ⟨_, h, subset_rfl⟩

theorem mem_iff_nonempty (X : Set Token) : neighborhoodSystem.mem X ↔ X.Nonempty :=
    Iff.rfl
end

end DomainTheory.NeighbourhoodSystems.Example15
end
```

Factoid 1.5a — consistent iff nonempty This system is a direct generalization of Example 1.2., which was special owing to the small number of tokens. (The other examples were special by virtue of the choice of neighbourhoods.) The verification that the present $\mathcal{D}$ is a neighbourhood system rests on nothing more than the remark that sets are consistent in $\mathcal{D}$ iff they have a non-empty intersection. Clearly the arrangement of neighbourhoods in $\mathcal{D}$ can be as varied as a four-element set will allow; if Δ were made larger, the possible combinations of neighbourhoods could be made as complex as you wish. □

Having some idea now of the variety of neighbourhood systems, we have to discuss what it is they do. As stressed before, the tokens do not have to correspond directly to the elements; but where, we ask, do the elements come from? One obvious suggestion for determining an element is to produce a sequence of "better and better" neighbourhoods:

$$X_0 \supseteq X_1 \supseteq \cdots \supseteq X_n \supseteq \cdots$$

Trivially, any finite initial segment of this sequence is consistent, and so each X_n is a partial approximation to the "limit". If $\mathcal{D}$ were always to be taken as *finite*, of course, there would be no point in discussing limits since any such sequence would eventually be constant. The elements in the finite case would therefore be completely represented by neighbourhoods with the *minimal* neighbourhoods corresponding to the total elements. But there are many reasons to go beyond the finite (though perhaps not too far beyond).

Suppose $\langle Y_n \rangle_{n=0}^{\infty}$ is another "convergent" sequence with

$Y_{n+1} \subseteq Y_n$ for all indices: when do the two sequences of neighbourhoods determine the *same limit*? The two sequences can surely be different; for example, $\langle Y_n \rangle_{n=0}^{\infty}$ could be a subsequence of $\langle X_n \rangle_{n=0}^{\infty}$, say, $Y_n = X_{2n}$. Still we would want to say that the same limit is obtained. Without being given any further structure on the neighbourhoods, a simple answer is just to say that each sequence goes *equally deep* as the other:

for each m there is an n with $X_n \subseteq Y_m$, and

for each n there is an m with $Y_m \subseteq X_n$.

This definition obviously puts sequences into equivalence classes, and so elements could be identified with these. But such a definition is clumsy for two reasons: it is always tiresome to work with equivalence classes, and there is no reason to think that simple infinite sequences are adequate for determining elements without some rather drastic assumptions on $\mathcal{D}$. Nevertheless, the idea is *suggestive*; we just have to find some construct to represent elements in a unique way and to phrase it in a general enough manner.

Start with $\langle X_n \rangle_{n=0}^{\infty}$ again, which "converges" as before. Think of all the other sequences equivalent to this one in the sense just defined. We can define the class of all terms of all such sequences very easily as being the family:

$$x = \{Z \in \mathcal{D} \mid X_n \subseteq Z \text{ for some } n\}.$$

Factoid 1.5b — equivalent sequences same limit It is easy to prove that if we form the analogous class for $\langle Y_n \rangle_{n=0}^{\infty}$, then the two families are *equal* if and only if the sequences are *equivalent*. Thus, we seem justified in letting x represent the limit of $\langle X_n \rangle_{n=0}^{\infty}$. All we have to do now is to remark on what sort of class x is as a subfamily of $\mathcal{D}$; what we abstract from the construction, however, will be just a bit more general than taking those x that result from sequences.

3.2.10 Definition 1.6 — ideal elements

DEFINITION 1.6. The (ideal) elements of a neighbourhood system $\mathcal{D}$ are those subfamilies $x \subseteq \mathcal{D}$ where:

(i) $\Delta \in x$;

(ii) $X, Y \in x$ always implies $X \cap Y \in x$; and

(iii) whenever $X \in x$ and $X \subseteq Y \in \mathcal{D}$, then $Y \in x$.

The *domain* of all such elements is written as $|\mathcal{D}|$. □

The idea of 1.6 is a well-known mathematical device: the families x satisfying (i)–(iii) are usually called *filters*. Most frequently the emphasis is put on the *maximal* filters, and these would be our *total* elements; however, in general, the proof that maximal filters exist is non-constructive, so for our purposes it is better not to neglect the partial filters. When maximal filters can be found, well and good, but we do not have to insist on them. Note that the generality of 1.6 is achieved by not requiring that there is a sequence of neighbourhoods that "generates" the filter x. (See Exercise 1.22.)

We have often said that neighbourhoods determine partial elements by themselves; we now make this remark precise.

`Element.lean`

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    NeighborhoodSystem

@[expose] public section

section

namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

structure Element where

  mem : Set α → Prop

  sub : ∀ {X}, mem X → V.mem X

  master_mem : mem V.master

  inter_mem : ∀ {X Y}, mem X → mem Y → mem (X ∩ Y)

  up_mem : ∀ {X Y}, mem X → V.mem Y → X ⊆ Y → mem Y

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
end
```

3.2.11 Definition 1.7 — principal filter

DEFINITION 1.7. For $X \in \mathcal{D}$, the *principal filter* determined by X is defined by:

$$\uparrow X = \{Y \in \mathcal{D} \mid X \subseteq Y\}.$$

The principal filters form what we shall call the *finite elements* of the domain $|\mathcal{D}|$. □

3.2.12 Factoid 1.7 — principals are one-one; inclusion-reversing principals; union of principal filters

Factoid_1_7.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_5

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems

namespace NeighborhoodSystem
```

```
variable {α : Type*} (V : NeighborhoodSystem α)

theorem principal_le_iff {X Y : Set α} (hX : V.mem X) (hY : V.mem Y) :
    V.principal hX ≤ V.principal hY ↔ Y ⊆ X := by
  constructor
  · intro h
    exact (h X ⟨hX, subset_rfl⟩).2
  · intro hYX Z hZ
    exact ⟨hZ.1, hYX.trans hZ.2⟩

theorem principal_injective {X Y : Set α} (hX : V.mem X) (hY : V.mem Y)
    (h : V.principal hX = V.principal hY) : X = Y := by
  have hYX : Y ⊆ X := (V.principal_le_iff hX hY).mp (le_of_eq h)
  have hXY : X ⊆ Y := (V.principal_le_iff hY hX).mp (le_of_eq h.symm)
  exact Set.Subset.antisymm hXY hYX

theorem eq_iUnion_principal (x : V.Element) {Z : Set α} :
    x.mem Z ↔ ∃ X, ∃ hX : x.mem X, (V.principal (x.sub hX)).mem Z := by
  constructor
  · intro hZ
    exact ⟨Z, hZ, x.sub hZ, subset_rfl⟩
  · rintro ⟨X, hX, hVZ, hXZ⟩
    exact x.up_mem hX hVZ hXZ

end NeighborhoodSystem

end DomainTheory.NeighbourhoodSystems
end
```

Factoid 1.7a1 — principals are one-one It is obvious that the correspondence between X and $\uparrow X$ is one-one and inclusion *reversing*, in the sense that

Factoid 1.7a2 — inclusion-reversing principals

$$X \subseteq Y \quad \text{iff} \quad \uparrow Y \subseteq \uparrow X$$

for all $X, Y \in \mathcal{D}$. But, except in very special cases, there is much more to $|\mathcal{D}|$ than just the finite elements. Much of our investigation will be concerned with finding out how much more. The finite elements are, in a certain sense, "dense" in $|\mathcal{D}|$, however, because it is also obvious from the definitions that for each $x \in |\mathcal{D}|$

Factoid 1.7b — union of principal filters

$$x = \bigcup \{\uparrow X \mid X \in x\}.$$

That is, every element is a certain type of "limit" of finite elements. (This statement is made more precise in Exercise 1.21)

We note that we have now had several occasions to use inclusion relationships between elements; this is an important relationship, and we give it a special name.

3.2.13 Definition 1.8 — approximation and totality

DEFINITION 1.8. For $x, y \in |\mathcal{D}|$, we say that x *approximates* y iff $x \subseteq y$. The element that approximates all others, $\{\Delta\}$, is called $\bot$ (read: *bottom*); it is the "least defined" element, or the "most partial" element. Elements maximal with respect to the approximation relation are called *total elements*. □

3.2.14 Factoid 1.8 — bottom element; bottom is least; finite filters are principal; prefix order; union of finite approximations

Factoid_1_8.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Examples_1_2_1_5_revisited

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

theorem bot_le (x : V.Element) : V.bot ≤ x := by
  intro Y hY
  rw [mem_bot] at hY
  subst hY
  exact x.master_mem

instance : OrderBot V.Element where
  bot := V.bot
  bot_le := V.bot_le

theorem eq_principal_of_isMin (x : V.Element) {X : Set α} (hX : x.mem X)
    (hmin : ∀ Y, x.mem Y → X ⊆ Y) : x = V.principal (x.sub hX) := by
  apply Element.ext
  intro Z
  constructor
  · intro hZ
    exact ⟨x.sub hZ, hmin Z hZ⟩
  · rintro ⟨hZmem, hXZ⟩
    exact x.up_mem hX hZmem hXZ
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.ExampleB
section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem
```

```
theorem mem_iff_exists_sigmaBot (x : B.Element) {Z : Set Str} :
    x.mem Z ↔ ∃ σ, x.mem (cone σ) ∧ (sigmaBot σ).mem Z := by
  constructor
  · intro hZ
    obtain ⟨σ, rfl⟩ := x.sub hZ
    exact ⟨σ, hZ, x.sub hZ, subset_rfl⟩
  · rintro ⟨σ, hcone, hZmem, hsub⟩
    exact x.up_mem hcone hZmem hsub

theorem prepend_append (σ τ : Str) (X : Set Str) :
    prepend σ (prepend τ X) = prepend (σ ++ τ) X := by
  ext w
  simp only [mem_prepend]
  constructor
  · rintro ⟨?, ⟨?', h?', rfl⟩, rfl⟩
    exact ⟨?', h?', by rw [List.append_assoc]⟩
  · rintro ⟨?, h?, rfl⟩
    exact ⟨τ ++ ?, ⟨?, h?, rfl⟩, by rw [List.append_assoc]⟩

theorem prepend_mono (σ : Str) {X X' : Set Str} (h : X' ⊆ X) : prepend σ X' ⊆ prepend
    σ X := by
  rintro w ⟨τ, hτ, rfl⟩
  exact ⟨τ, h hτ, rfl⟩

theorem prepend_univ (σ : Str) : prepend σ Set.univ = cone σ := by
  ext w
  simp only [mem_prepend, Set.mem_univ, true_and, mem_cone]
  constructor
  · rintro ⟨τ, rfl⟩
    exact List.prefix_append σ τ
  · rintro ⟨t, ht⟩
    exact ⟨t, ht.symm⟩

theorem sigmaBot_le_iff (σ₀ σ₁ : Str) :
    sigmaBot σ₀ ≤ sigmaBot σ₁ ↔ σ₀ <+: σ₁ := by
  rw [sigmaBot, sigmaBot, B.principal_le_iff, cone_subset_cone]

theorem sigmaElt_append (σ τ : Str) (x : B.Element) :
    sigmaElt (σ ++ τ) x = sigmaElt σ (sigmaElt τ x) := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨hY, X, hX, hsub⟩
    refine ⟨hY, prepend τ X, ⟨memB_prepend τ (x.sub hX), X, hX, subset_rfl⟩, ?_⟩
    rw [prepend_append]; exact hsub
  · rintro ⟨hY, X, ⟨_, X', hX', hsub'⟩, hsub⟩
    refine ⟨hY, X', hX', ?_⟩
    rw [← prepend_append]
    exact (prepend_mono σ hsub').trans hsub

theorem sigmaElt_bot (σ : Str) : sigmaElt σ B.bot = sigmaBot σ := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨hY, X, hX, hsub⟩
    rw [B.mem_bot] at hX
```

```
    subst hX
    rw [B_master, prepend_univ] at hsub
    exact ⟨hY, hsub⟩
  · rintro ⟨hY, hcone⟩
    refine ⟨hY, B.master, B.mem_bot.mpr rfl, ?_⟩
    rw [B_master, prepend_univ]
    exact hcone

theorem sigmaElt_nil (x : B.Element) : sigmaElt [] x = x := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨hY, X, hX, hsub⟩
    rw [prepend_nil] at hsub
    exact x.up_mem hX hY hsub
  · intro hY
    exact ⟨x.sub hY, Y, hY, by rw [prepend_nil]⟩
end

end DomainTheory.NeighbourhoodSystems.ExampleB
end
```

Factoid 1.8a1 — bottom element DEFINITION 1.8. For $x, y \in |\mathcal{D}|$, we say that x *approximates* y iff $x \subseteq y$. The element that approximates all others, $\{\Delta\}$, is called $\perp$ (read: *bottom*); it is the "least defined" element, or the "most partial" element. Elements maximal with respect to the approximation relation are called *total elements*. □

Factoid 1.8a2 — bottom is least DEFINITION 1.8. For $x, y \in |\mathcal{D}|$, we say that x *approximates* y iff $x \subseteq y$. The element that approximates all others, $\{\Delta\}$, is called $\perp$ (read: *bottom*); it is the "least defined" element, or the "most partial" element. Elements maximal with respect to the approximation relation are called *total elements*. □

Factoid 1.8b — finite filters are principal EXAMPLES 1.2 – 1.5 (Revisited). The examples as given were all finite, so any explicitly given filter x is principal, the element is finite, the minimal $X \in x$ tells us all we need to know. In such simple situations there is essentially no difference between elements and neighbourhoods — except for the reversal of the order as noted. This (necessary) reversal should not, however, become a matter of confusion: the smaller the neighbourhood has become, the more it has "converged", and so the better defined the element has become. In the approximation relation the "poorer" elements are placed below the "better" with the total up at the top. This will become clearer in discussing "infinite" elements.

Example 1.3 will be generalized in Exercise 1.12. Let us here generalize first 1.4. We let

$$\Delta = \Sigma^*,$$

where $\Sigma = \{0, 1\}$ and Σ^* means the set of all finite sequences of 0's and 1's, with Λ being the empty sequence. We write $\sigma\tau$ for the *concatenation* or *juxtaposition* of two sequences $\sigma, \tau \in \Sigma^*$. Define

$$B = \{\sigma\Sigma^* \mid \sigma \in \Sigma^*\}, \text{ where}$$

$$\sigma X = \{\sigma\tau \mid \tau \in X\},$$

for an arbitrary set $X \subseteq \Sigma^*$. In other words, a neighbourhood in B consists of all *extensions* of a given sequence σ. (Refer back to the finite version of 1.4.) We use the letter "B" to remind us of "binary", and this is an example we shall refer to many times. The proof (if it is not obvious) that B is a neighbourhood system should be done as an exercise.

What do we find in $|B|$? Of course $\perp = \{\Delta\} \in |B|$. For any $x \in |B|$ and $\sigma \in \Sigma^*$ define

$$\sigma x = \{Y \mid \sigma X \subseteq Y \text{ some } X \in x\}.$$

Factoid 1.8c — prefix order Again there is an exercise here to show $\sigma x \in |B|$. In particular $\sigma \perp \in |B|$ for all $\sigma \in \Sigma^*$, and these are just the finite elements. The minimal element of $\sigma\ \perp$ is $\sigma\Delta$. Note that $\sigma_0 \perp \subseteq \sigma_1 \perp$ if and only if σ_0 is an *initial segment* of the sequence σ_1.

If now $x \in |B|$ is any explicitly given element (that is, if we know for any $X \in B$ whether or not $X \in x$), we have but to work out from these definitions that

Factoid 1.8d — union of finite approximations

$$x = \bigcup_{n=0}^{\infty} \sigma_n \perp,$$

where the $\sigma_n \in \Sigma^*$ and each σ_n is an initial segment of the next σ_{n+1}. *In general, in any domain, an element is uniquely determined by its finite approximations, and we are just making this explicit in* $|B|$. When we have complete knowledge of x, then there are two cases: either the approximations $\sigma_n \perp$ become constant from some point on (where $n > n_0$), or not. In the first case x is finite and equal to $\sigma_{n_0} \perp$; in the second case x is infinite and the σ_n fill out an infinite (one-way) sequence.

The generalization of 1.5 to the infinite case where $\Delta = \mathbf{N} = \{0, 1, 2, 3, \ldots, n, \ldots\}$ can be made in more than one way: for instance either we use as neighbourhoods *all* non-empty subsets of Δ or just those omitting but a finite number of integers. And, as will become apparent, there are other choices giving domains of quite different characters. □

Many constructions (choices of $\mathcal{D}$) lead to the "same" domain; "sameness" is an important notion and it is to be defined in terms of "isomorphism", which in turn is to be defined in terms of approximation preserving correspondences.

3.2.15 Examples 1.2–1.5 (Revisited) — finite examples revisited

`Examples_1_2_1_5_revisited.lean`

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Example_1_2
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Example_1_3
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Example_1_4
```

```
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Example_1_5

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

theorem eq_principal_of_minimum (x : V.Element) {X : Set α} (hX : x.mem X)
    (hmin : ∀ Y, x.mem Y → X ⊆ Y) : x = V.principal (x.sub hX) := by
  apply Element.ext
  intro Z
  constructor
  · intro hZ
    exact ⟨x.sub hZ, hmin Z hZ⟩
  · rintro ⟨hZ, hXZ⟩
    exact x.up_mem hX hZ hXZ

theorem exists_minimum_of_fintype [Fintype α] (x : V.Element) :
    ∃ X, x.mem X ∧ ∀ Y, x.mem Y → X ⊆ Y := by
  classical
  suffices aux : ∀ n (A : Set α), A.ncard = n → x.mem A →
      ∃ X, x.mem X ∧ X ⊆ A ∧ ∀ Y, x.mem Y → Y ⊆ A → X ⊆ Y from by
    obtain ⟨X, hX, _, hmin⟩ := aux V.master.ncard V.master rfl x.master_mem
    exact ⟨X, hX, fun Y hY => hmin Y hY (V.sub_master (x.sub hY))⟩
  intro n
  induction n using Nat.strong_induction_on with
  | h n ih =>
    intro A hn hA
    by_cases hleast : ∀ Y, x.mem Y → Y ⊆ A → A ⊆ Y
    · exact ⟨A, hA, subset_rfl, hleast⟩
    · push Not at hleast
      obtain ⟨Y, hY, hYA, hAY⟩ := hleast
      have hss : Y ? A := ⟨hYA, hAY⟩
      have hlt : Y.ncard < n := by
        rw [← hn]
        exact Set.ncard_lt_ncard hss
      obtain ⟨X, hX, hXsub, hmin⟩ := ih Y.ncard hlt Y rfl hY
      refine ⟨X, hX, hXsub.trans hYA, ?_⟩
      intro Z hZ hZA
      have hcap : x.mem (Z ∩ Y) := x.inter_mem hZ hY
      exact (hmin (Z ∩ Y) hcap Set.inter_subset_right).trans Set.inter_subset_left

theorem element_eq_principal_of_fintype [Fintype α] (x : V.Element) :
    ∃ X, ∃ hX : V.mem X, x = V.principal hX := by
  obtain ⟨X, hX, hmin⟩ := V.exists_minimum_of_fintype x
  exact ⟨X, x.sub hX, V.eq_principal_of_minimum x hX hmin⟩

theorem smaller_neighbourhood_le {X Y : Set α} (hX : V.mem X) (hY : V.mem Y) :
    V.principal hY ≤ V.principal hX ↔ X ⊆ Y := by
  constructor
  · intro h
```

```
    exact (h Y ⟨hY, subset_rfl⟩).2
  · intro hXY Z hZ
    exact ⟨hZ.1, hXY.trans hZ.2⟩
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Example12

theorem element_eq_principal (x : neighborhoodSystem.Element) :
    ∃ X, ∃ hX : neighborhoodSystem.mem X, x = neighborhoodSystem.principal hX :=
  NeighborhoodSystem.element_eq_principal_of_fintype neighborhoodSystem x

end DomainTheory.NeighbourhoodSystems.Example12
namespace DomainTheory.NeighbourhoodSystems.Example13

theorem element_eq_principal (x : neighborhoodSystem.Element) :
    ∃ X, ∃ hX : neighborhoodSystem.mem X, x = neighborhoodSystem.principal hX :=
  NeighborhoodSystem.element_eq_principal_of_fintype neighborhoodSystem x

end DomainTheory.NeighbourhoodSystems.Example13
namespace DomainTheory.NeighbourhoodSystems.Example14

theorem element_eq_principal (x : neighborhoodSystem.Element) :
    ∃ X, ∃ hX : neighborhoodSystem.mem X, x = neighborhoodSystem.principal hX :=
  NeighborhoodSystem.element_eq_principal_of_fintype neighborhoodSystem x

end DomainTheory.NeighbourhoodSystems.Example14
namespace DomainTheory.NeighbourhoodSystems.Example15

theorem element_eq_principal (x : neighborhoodSystem.Element) :
    ∃ X, ∃ hX : neighborhoodSystem.mem X, x = neighborhoodSystem.principal hX :=
  NeighborhoodSystem.element_eq_principal_of_fintype neighborhoodSystem x

end DomainTheory.NeighbourhoodSystems.Example15
namespace DomainTheory.NeighbourhoodSystems.ExampleB
section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem

abbrev Str := List Bool

def cone (σ : Str) : Set Str := {w | σ <+: w}

@[simp] theorem mem_cone {σ w : Str} : w ∈ cone σ ↔ σ <+: w := Iff.rfl

theorem cone_nil : cone [] = Set.univ := by
  ext w; simp [cone]

theorem cone_subset_cone {σ τ : Str} : cone σ ⊆ cone τ ↔ τ <+: σ := by
  constructor
  · intro h
    exact h (show σ ∈ cone σ from List.prefix_rfl)
  · intro hτσ w hw
    exact hτσ.trans hw
```

```
theorem cone_trichotomy (σ τ : Str) :
    cone σ ⊆ cone τ ∨ cone τ ⊆ cone σ ∨ cone σ ∩ cone τ = ∅ :=
  if hστ : σ <+: τ then Or.inr (Or.inl (cone_subset_cone.mpr hστ))
  else if hτσ : τ <+: σ then Or.inl (cone_subset_cone.mpr hτσ)
  else Or.inr (Or.inr (by
    ext w
    simp only [Set.mem_inter_iff, mem_cone, Set.mem_empty_iff_false, iff_false,
    not_and]
    intro h1 h2
    rcases List.prefix_or_prefix_of_prefix h1 h2 with h | h
    · exact hστ h
    · exact hτσ h))

def memB (X : Set Str) : Prop := ∃ σ, X = cone σ

theorem nestedOrDisjoint : NestedOrDisjoint memB := by
  rintro X Y ⟨σ, rfl⟩ ⟨τ, rfl⟩
  exact cone_trichotomy σ τ

def B : NeighborhoodSystem Str :=
  NeighborhoodSystem.ofNestedOrDisjoint memB Set.univ
    ⟨[], Set.mem_univ _⟩ ⟨[], cone_nil.symm⟩ nestedOrDisjoint
    (fun _ => Set.subset_univ _)

@[simp] theorem B_mem {X : Set Str} : B.mem X ↔ memB X := Iff.rfl

@[simp] theorem B_master : B.master = Set.univ := rfl

theorem memB_cone (σ : Str) : B.mem (cone σ) := ⟨σ, rfl⟩

def prepend (σ : Str) (X : Set Str) : Set Str := {w | ∃ τ, τ ∈ X ∧ w = σ ++ τ}

@[simp] theorem mem_prepend {σ : Str} {X : Set Str} {w : Str} :
    w ∈ prepend σ X ↔ ∃ τ, τ ∈ X ∧ w = σ ++ τ := Iff.rfl

theorem prepend_cone (σ ? : Str) : prepend σ (cone ?) = cone (σ ++ ?) := by
  ext w
  simp only [mem_prepend, mem_cone]
  constructor
  · rintro ⟨τ, hτ, rfl⟩
    exact (List.prefix_append_right_inj σ).mpr hτ
  · rintro ⟨t, ht⟩
    exact ⟨? ++ t, List.prefix_append ? t, by rw [← ht, List.append_assoc]⟩

theorem memB_prepend (σ : Str) {X : Set Str} (hX : B.mem X) : B.mem (prepend σ X) :=
    by
  obtain ⟨?, rfl⟩ := hX
  exact ⟨σ ++ ?, prepend_cone σ ?⟩

@[simp] theorem prepend_nil (X : Set Str) : prepend [] X = X := by
  ext w; simp [mem_prepend]

def sigmaBot (σ : Str) : B.Element := B.principal (memB_cone σ)

def sigmaElt (σ : Str) (x : B.Element) : B.Element where
  mem Y := B.mem Y ∧ ∃ X, x.mem X ∧ prepend σ X ⊆ Y
```

```
  sub h := h.1
  master_mem := ⟨B.master_mem, B.master, x.master_mem, Set.subset_univ _⟩
  inter_mem := by
    intro Y₁ Y₂ h1 h2
    obtain ⟨hY₁, X₁, hX₁, hsub₁⟩ := h1
    obtain ⟨hY₂, X₂, hX₂, hsub₂⟩ := h2
    have hXinter : x.mem (X₁ ∩ X₂) := x.inter_mem hX₁ hX₂
    have hsub : prepend σ (X₁ ∩ X₂) ⊆ Y₁ ∩ Y₂ := by
      rintro w ⟨τ, ⟨hτ₁, hτ₂⟩, rfl⟩
      exact ⟨hsub₁ ⟨τ, hτ₁, rfl⟩, hsub₂ ⟨τ, hτ₂, rfl⟩⟩
    have hZmem : B.mem (prepend σ (X₁ ∩ X₂)) := memB_prepend σ (x.sub hXinter)
    exact ⟨B.inter_mem hY₁ hY₂ hZmem hsub, X₁ ∩ X₂, hXinter, hsub⟩
  up_mem := by
    intro X Y hX hY hXY
    obtain ⟨_, X', hX', hsub'⟩ := hX
    exact ⟨hY, X', hX', hsub'.trans hXY⟩

theorem cone_injective {σ τ : Str} (h : cone σ = cone τ) : σ = τ := by
  have h1 : τ <+: σ := cone_subset_cone.mp (le_of_eq h)
  have h2 : σ <+: τ := cone_subset_cone.mp (le_of_eq h.symm)
  exact h2.eq_of_length (h2.length_le.antisymm h1.length_le)

theorem bot_mem_cone_iff {σ : Str} : B.bot.mem (cone σ) ↔ σ = [] := by
  rw [mem_bot, B_master, ← cone_nil]
  constructor
  · exact cone_injective
  · intro h; rw [h]
end

end DomainTheory.NeighbourhoodSystems.ExampleB
end
```

EXAMPLES 1.2 – 1.5 (Revisited). The examples as given were all finite, so any explicitly given filter x is principal, the element is finite, the minimal $X \in x$ tells us all we need to know. In such simple situations there is essentially no difference between elements and neighbourhoods — except for the reversal of the order as noted. This (necessary) reversal should not, however, become a matter of confusion: the smaller the neighbourhood has become, the more it has "converged", and so the better defined the element has become. In the approximation relation the "poorer" elements are placed below the "better" with the total up at the top. This will become clearer in discussing "infinite" elements.

Example 1.3 will be generalized in Exercise 1.12. Let us here generalize first 1.4. We let

$$\Delta = \Sigma^*,$$

where $\Sigma = \{0, 1\}$ and Σ^* means the set of all finite sequences of 0's and 1's, with Λ being the empty sequence. We write $\sigma\tau$ for the *concatenation* or *juxtaposition* of two sequences $\sigma, \tau \in \Sigma^*$. Define

$$B = \{\sigma\Sigma^* \mid \sigma \in \Sigma^*\}, \text{ where}$$

$$\sigma X = \{\sigma\tau \mid \tau \in X\},$$

for an arbitrary set $X \subseteq \Sigma^*$. In other words, a neighbourhood in B consists of all *extensions* of a given sequence σ. (Refer back to the finite version of 1.4.) We use the letter "B" to remind us of "binary", and

this is an example we shall refer to many times. The proof (if it is not obvious) that B is a neighbourhood system should be done as an exercise.

What do we find in $|B|$? Of course $\perp = \{\Delta\} \in |B|$. For any $x \in |B|$ and $\sigma \in \Sigma^*$ define

$$\sigma x = \{Y \mid \sigma X \subseteq Y \text{ some } X \in x\}.$$

3.2.16 Definition 1.9 — isomorphic domains

DEFINITION 1.9. Two neighbourhood systems $\mathcal{D}_0$ and $\mathcal{D}_1$ determine *isomorphic domains* iff there is a one-one correspondence between $|\mathcal{D}_0|$ and $|\mathcal{D}_1|$ which preserves inclusion between the elements of the domains. In symbols we write $\mathcal{D}_0 \cong \mathcal{D}_1$. □

It is certain that the property of 1.9 is necessary, but it may not be so clear that it is sufficient. We shall in fact prove in the next lecture that an isomorphism between domains always maps finite elements to finite elements, so it always results from a one-one inclusion-preserving correspondence between neighbourhoods. This is surely as strong as could be hoped. This general result is not needed to see that particular domains are isomorphic.

In some of the examples tokens corresponded to total elements and in some to partial elements; it is not difficult to see (ex post facto) that every domain can be presented with tokens exactly corresponding to partial elements.

3.2.17 Theorem 1.10 — basic open neighbourhoods

Theorem_1_10.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_27
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.DomainIso
import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.bot
public import Mathlib.Algebra.Group.End

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

def tokenSystem : NeighborhoodSystem V.Element where
  mem S := ∃ X, V.mem X ∧ S = V.bracket X
  master := Set.univ
  master_nonempty := ⟨V.bot, Set.mem_univ _⟩
  master_mem := ⟨V.master, V.master_mem, V.bracket_master.symm⟩
  inter_mem := by
    rintro S T W ⟨X, hX, rfl⟩ ⟨Y, hY, rfl⟩ ⟨Z, hZ, rfl⟩ hWsub
    have hpz := hWsub (V.principal_mem_bracket hZ)
    obtain ⟨hzX, hzY⟩ := hpz
    have hXY : V.mem (X ∩ Y) := V.inter_mem hX hY hZ (Set.subset_inter hzX.2 hzY.2)
```

```
    exact ⟨X ∩ Y, hXY, V.bracket_inter hX hY⟩
  sub_master := fun _ => Set.subset_univ _

@[simp] theorem tokenSystem_mem {S : Set V.Element} :
    V.tokenSystem.mem S ↔ ∃ X, V.mem X ∧ S = V.bracket X := Iff.rfl

def ofToken (y : V.tokenSystem.Element) : V.Element where
  mem X := V.mem X ∧ y.mem (V.bracket X)
  sub h := h.1
  master_mem := ⟨V.master_mem, by rw [V.bracket_master]; exact y.master_mem⟩
  inter_mem := by
    rintro X Y ⟨hX, hyX⟩ ⟨hY, hyY⟩
    have hyInter : y.mem (V.bracket X ∩ V.bracket Y) := y.inter_mem hyX hyY
    obtain ⟨W, hW, hWeq⟩ := y.sub hyInter
    have hpw := V.principal_mem_bracket hW
    rw [← hWeq] at hpw
    obtain ⟨hwX, hwY⟩ := hpw
    have hXY : V.mem (X ∩ Y) := V.inter_mem hX hY hW (Set.subset_inter hwX.2 hwY.2)
    refine ⟨hXY, ?_⟩
    rw [← V.bracket_inter hX hY]
    exact hyInter
  up_mem := by
    rintro X Y ⟨hX, hyX⟩ hY hXY
    exact ⟨hY, y.up_mem hyX ⟨Y, hY, rfl⟩ ((V.bracket_subset_iff hX hY).mpr hXY)⟩

def toToken (x : V.Element) : V.tokenSystem.Element where
  mem S := ∃ X, x.mem X ∧ S = V.bracket X
  sub := by rintro S ⟨X, hX, rfl⟩; exact ⟨X, x.sub hX, rfl⟩
  master_mem := ⟨V.master, x.master_mem, V.bracket_master.symm⟩
  inter_mem := by
    rintro S T ⟨X, hX, rfl⟩ ⟨Y, hY, rfl⟩
    exact ⟨X ∩ Y, x.inter_mem hX hY, V.bracket_inter (x.sub hX) (x.sub hY)⟩
  up_mem := by
    rintro S T ⟨X, hX, rfl⟩ hT hsub
    obtain ⟨Y, hYmem, rfl⟩ := hT
    exact ⟨Y, x.up_mem hX hYmem ((V.bracket_subset_iff (x.sub hX) hYmem).mp hsub), rfl⟩

def tokenIso : V.Element ≃o V.tokenSystem.Element where
  toFun := V.toToken
  invFun := V.ofToken
  left_inv := by
    intro x
    apply Element.ext
    intro X
    constructor
    · rintro ⟨hX, X', hX', heq⟩
      rw [V.bracket_injective hX (x.sub hX') heq]; exact hX'
    · intro hx
      exact ⟨x.sub hx, X, hx, rfl⟩
  right_inv := by
    intro y
    apply Element.ext
    intro S
    constructor
    · rintro ⟨X, ⟨_, hyX⟩, rfl⟩
      exact hyX
```

```
    · intro hyS
      obtain ⟨X, hX, rfl⟩ := y.sub hyS
      exact ⟨X, ⟨hX, hyS⟩, rfl⟩
  map_rel_iff' := by
    intro x x'
    constructor
    · intro h X hx
      have hmem : (V.toToken x).mem (V.bracket X) := ⟨X, hx, rfl⟩
      obtain ⟨X', hX', heq⟩ := h (V.bracket X) hmem
      rw [V.bracket_injective (x.sub hx) (x'.sub hX') heq]; exact hX'
    · intro h S hS
      obtain ⟨X, hX, rfl⟩ := hS
      exact ⟨X, h X hX, rfl⟩

theorem bracket_inter_nonempty_iff {X Y : Set α} (hX : V.mem X) (hY : V.mem Y) :
    (V.bracket X ∩ V.bracket Y).Nonempty ↔ ∃ Z, V.mem Z ∧ Z ⊆ X ∩ Y := by
  constructor
  · rintro ⟨x, hxX, hxY⟩
    exact ⟨X ∩ Y, x.sub (x.inter_mem hxX hxY), subset_rfl⟩
  · rintro ⟨Z, hZ, hZsub⟩
    refine ⟨V.principal hZ, ?_, ?_⟩
    · exact ⟨hX, hZsub.trans Set.inter_subset_left⟩
    · exact ⟨hY, hZsub.trans Set.inter_subset_right⟩

theorem isomorphic_tokenSystem : V ≅? V.tokenSystem := ⟨V.tokenIso⟩
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
section

set_option linter.unusedVariables false

theorem theorem_110.{u_1} : And
  (And
    (And
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
    X Y : Set α},
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y →
            Iff
              (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V)
                (@Inter.inter (Set (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V))
                  (@Set.instInter (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V))
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V X
    )
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V Y
    )))
              (∃ (Z : Set α),
                And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Z)
                  (@LE.le (Set α) (@Set.instLE α) Z (@Inter.inter (Set α) (@Set.
    instInter α) X Y))))
```

```
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
  X Y : Set α},
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y →
          @Eq (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
  V))
            (@Inter.inter (Set (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V))
              (@Set.instInter (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
  .Element α V))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V X)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V Y))
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V
              (@Inter.inter (Set α) (@Set.instInter α) X Y))))
   (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
     @DomainTheory.NeighbourhoodSystems.Isomorphic α
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) V
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.tokenSystem α V)))
(∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {X :
  Set α}
   (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X),
   @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
  )
     (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
     (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V))
     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V X)
     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X hX)) :=
@And.intro
(And
  (And
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
  X Y : Set α},
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y →
          Iff
            (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V)
              (@Inter.inter (Set (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V))
                (@Set.instInter (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V))
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V X
  )
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V Y
  )))
            (∃ (Z : Set α),
              And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Z)
                (@LE.le (Set α) (@Set.instLE α) Z (@Inter.inter (Set α) (@Set.
  instInter α) X Y))))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
  X Y : Set α},
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y →
          @Eq (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
  V))
```

```
          (@Inter.inter (Set (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V))
            (@Set.instInter (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
 .Element α V))
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V X)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V Y))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V
            (@Inter.inter (Set α) (@Set.instInter α) X Y))))
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
    @DomainTheory.NeighbourhoodSystems.Isomorphic α
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) V
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.tokenSystem α V)))
(∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {X :
 Set α}
  (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X),
  @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
 )
    (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
    (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V))
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V X)
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X hX))
(@And.intro
  (And
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
 X Y : Set α},
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y →
          Iff
            (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)
              (@Inter.inter (Set (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V))
                (@Set.instInter (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V))
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V X
 )
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V Y
 )))
            (∃ (Z : Set α),
              And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Z)
                (@LE.le (Set α) (@Set.instLE α) Z (@Inter.inter (Set α) (@Set.
 instInter α) X Y))))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
 X Y : Set α},
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y →
          @Eq (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
 V))
            (@Inter.inter (Set (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V))
              (@Set.instInter (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
 .Element α V))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V X)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V Y))
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V
```

```
              (@Inter.inter (Set α) (@Set.instInter α) X Y))))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
      @DomainTheory.NeighbourhoodSystems.Isomorphic α
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) V
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.tokenSystem α V))
    (@And.intro
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
    X Y : Set α},
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y →
            Iff
              (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V)
                (@Inter.inter (Set (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V))
                  (@Set.instInter (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V))
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V X
    )
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V Y
    )))
              (∃ (Z : Set α),
                And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Z)
                  (@LE.le (Set α) (@Set.instLE α) Z (@Inter.inter (Set α) (@Set.
    instInter α) X Y))))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
    X Y : Set α},
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y →
            @Eq (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
    V))
              (@Inter.inter (Set (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V))
                (@Set.instInter (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
    .Element α V))
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V X)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V Y))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V
                (@Inter.inter (Set α) (@Set.instInter α) X Y)))
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket_inter_nonempty_iff
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket_inter)
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.isomorphic_tokenSystem)
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal_mem_bracket
end

end DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

def IsComplete {β : Type*} (V' : NeighborhoodSystem β) : Prop :=
  ∀ y : V'.Element, ∃! b : β, ∀ S, V'.mem S → (y.mem S ↔ b ∈ S)

def filterFixedBy (x : V.Element) : V.tokenSystem.Element := V.toToken x
```

```
theorem bracket_nonempty_iff {X : Set α} : (V.bracket X).Nonempty ↔ V.mem X := by
  constructor
  · rintro ⟨x, hx⟩; exact x.sub hx
  · intro hX; exact ⟨V.principal hX, V.principal_mem_bracket hX⟩
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
end
```

THEOREM 1.10. Given any neighbourhood system $\mathcal{D}$, define for $X \in \mathcal{D}$

$$[X] = \{x \in |\mathcal{D}| \mid X \in x\}.$$

The subsets $[X] \subseteq |\mathcal{D}|$ for $X \in \mathcal{D}$ form a neighbourhood system over $|\mathcal{D}|$ which determines a domain isomorphic to $|\mathcal{D}|$.

Proof: We note first that

(1) $[\Delta] = |\mathcal{D}|$.

Next note that

(2) X, Y are consistent in $\mathcal{D}$ iff $[X] \cap [Y] \neq \emptyset$;

and that for $X, Y \in \mathcal{D}$

(3) $[X] \cap [Y] = [X \cap Y]$ if $X \cap Y \in \mathcal{D}$.

Inasmuch as

(4) $\uparrow X \in [X]$ for all $X \in \mathcal{D}$,

it easily follows that $\mathcal{D}$ and the family

$$\{[X] \mid X \in \mathcal{D}\}$$

are in a one-one, inclusion-preserving correspondence. Thus, we can induce the desired one-one correspondence between the elements of the two systems. □

The import of 1.10 is that the original tokens in Δ can be replaced by the elements of $|\mathcal{D}|$. This process replaces the neighbourhood $X \subseteq \Delta$ by the subset $[X] \subseteq |\mathcal{D}|$. As the passage is inclusion preserving, the domain has not really changed, only its presentation. Though of some theoretical charm, the theorem is not of much use since we still have to get $\mathcal{D}$ from somewhere. It does emphasize, though, that the rôle of the tokens is simply to keep the inclusions (and intersections) of neighbourhoods sorted out. It is *not* always true that the tokens can be identified with the total elements.

The last theorem in this lecture is a result on *closure properties* of a domain with respect to set-theoretical operations which have interesting meanings with respect to approximation.

3.2.18 Theorem 1.11 — intersections and directed unions

Theorem_1_11.lean

```
module

import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.Factoid_1_8
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Examples_1_2_1_5_revisited

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

def iInter (x : ℕ → V.Element) : V.Element where
  mem X := ∀ n, (x n).mem X
  sub h := (x 0).sub (h 0)
  master_mem n := (x n).master_mem
  inter_mem h1 h2 n := (x n).inter_mem (h1 n) (h2 n)
  up_mem h hY hXY n := (x n).up_mem (h n) hY hXY

@[simp] theorem mem_iInter (x : ℕ → V.Element) {X : Set α} :
    (V.iInter x).mem X ↔ ∀ n, (x n).mem X := Iff.rfl

def iUnion (x : ℕ → V.Element) (hmono : Monotone x) : V.Element where
  mem X := ∃ n, (x n).mem X
  sub := by rintro X ⟨n, hn⟩; exact (x n).sub hn
  master_mem := ⟨0, (x 0).master_mem⟩
  inter_mem := by
    rintro X Y ⟨n, hn⟩ ⟨m, hm⟩
    refine ⟨max n m, (x (max n m)).inter_mem ?_ ?_⟩
    · exact hmono (le_max_left n m) X hn
    · exact hmono (le_max_right n m) Y hm
  up_mem := by
    rintro X Y ⟨n, hn⟩ hY hXY
    exact ⟨n, (x n).up_mem hn hY hXY⟩

@[simp] theorem mem_iUnion (x : ℕ → V.Element) (hmono : Monotone x) {X : Set α} :
    (V.iUnion x hmono).mem X ↔ ∃ n, (x n).mem X := Iff.rfl

theorem iInter_le (x : ℕ → V.Element) (n : ℕ) : V.iInter x ≤ x n :=
  fun _ h => h n

theorem iUnion_le (x : ℕ → V.Element) (hmono : Monotone x) (y : V.Element)
    (h : ∀ n, x n ≤ y) : V.iUnion x hmono ≤ y := by
  rintro X ⟨n, hn⟩
  exact h n X hn
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
```

```
namespace DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
section

set_option linter.unusedVariables false

theorem theorem_111.{u_1} : ∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α)
  (x : Nat → @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
  (hmono :
    @Monotone Nat (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
    Nat.instPreorder
      (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
    .Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.instPartialOrderElement
     α V))
      x)
  (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
  (∀ (n : Nat),
      @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
        (x n) y) →
    @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
     V)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.iUnion α V x hmono) y :=
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.iUnion_le
end

end DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
namespace DomainTheory.NeighbourhoodSystems.Exercise113
section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ExampleB

def prefixSeq (p : ℕ → Bool) : ℕ → Str
  | 0 => []
  | (n + 1) => prefixSeq p n ++ [p n]

@[simp] theorem prefixSeq_length (p : ℕ → Bool) (n : ℕ) : (prefixSeq p n).length = n
    := by
  induction n with
  | zero => rfl
  | succ k ih => simp [prefixSeq, ih]

def branchSeq (p : ℕ → Bool) (n : ℕ) : B.Element := sigmaBot (prefixSeq p n)

theorem prefixSeq_prefix_succ (p : ℕ → Bool) (n : ℕ) :
```

```
    prefixSeq p n <+: prefixSeq p (n + 1) := ⟨[p n], rfl⟩

theorem prefixSeq_mono (p : ℕ → Bool) {n m : ℕ} (h : n ≤ m) :
    prefixSeq p n <+: prefixSeq p m := by
  induction m, h using Nat.le_induction with
  | base => exact List.prefix_rfl
  | succ k _ ih => exact ih.trans (prefixSeq_prefix_succ p k)

theorem branchSeq_mono (p : ℕ → Bool) : Monotone (branchSeq p) := by
  intro n m h
  exact (sigmaBot_le_iff (prefixSeq p n) (prefixSeq p m)).mpr (prefixSeq_mono p h)

def branch (p : ℕ → Bool) : B.Element := B.iUnion (branchSeq p) (branchSeq_mono p)

theorem branch_mem_iff (p : ℕ → Bool) {σ : Str} :
    (branch p).mem (cone σ) ↔ ∃ n, σ <+: prefixSeq p n := by
  constructor
  · intro h
    obtain ⟨n, hn⟩ := (B.mem_iUnion (branchSeq p) (branchSeq_mono p)).mp h
    exact ⟨n, cone_subset_cone.mp hn.2⟩
  · rintro ⟨n, hn⟩
    exact (B.mem_iUnion (branchSeq p) (branchSeq_mono p)).mpr
      ⟨n, memB_cone σ, cone_subset_cone.mpr hn⟩

theorem prefix_comparable_of_mem {σ τ : Str} (y : B.Element)
    (hσ : y.mem (cone σ)) (hτ : y.mem (cone τ)) : σ <+: τ ∨ τ <+: σ := by
  have hi : y.mem (cone σ ∩ cone τ) := y.inter_mem hσ hτ
  obtain ⟨?, h?⟩ := y.sub hi
  rcases cone_trichotomy σ τ with h | h | h
  · exact Or.inr (cone_subset_cone.mp h)
  · exact Or.inl (cone_subset_cone.mp h)
  · exfalso
    have hmem : ? ∈ cone ? := mem_cone.mpr List.prefix_rfl
    rw [← h?, h] at hmem
    simp at hmem
end

end DomainTheory.NeighbourhoodSystems.Exercise113
end
```

THEOREM 1.11. If $\mathcal{D}$ is a neighbourhood system and $x_n \in |\mathcal{D}|$ for $n = 0, 1, 2, \ldots$, then

(i) $\bigcap_{n=0}^{\infty} x_n \in |\mathcal{D}|$; and

(ii) $\bigcup_{n=0}^{\infty} x_n \in |\mathcal{D}|$, provided

$$x_0 \subseteq x_1 \subseteq x_2 \subseteq \cdots \subseteq x_n \subseteq x_{n+1} \subseteq \cdots .$$

Proof: The conditions of 1.6 have to be checked. For the case of intersection, all of 1.6(i)–(iii) are quite obvious. For the case of union, only 1.6(ii) gives pause and it requires the proviso. If X and Y belong to the union, then $X \in x_n$, say, and $Y \in x_m$. But, either $n < m$ or $m < n$, and if $k = \max(n, m)$, then $X, Y \in x_k$. Since $x_k \in |\mathcal{D}|$, we have $X \cap Y \in x_k$; thus, $X \cap Y$ belongs to the union. This proves (ii). □

In words, the intersection is the best element that is at the same time an approximation to all of the elements x_n; the intersection is exactly what is common to all the given elements. The union on the other hand is just what the (increas-

The union on the other hand is just what the (increasing sequence of the) x_n approximates; the union combines contributions from all the x_n into a "better" element – but no more than that.

In thinking about domains a rough diagram of the partial-ordering relation $\subseteq$ between elements is often helpful. The picture of 1.4 is an example where the nodes represent the elements. Any finite tree growing up from a root node would also be an example. Indeed, any finite partially ordered set with least element would be an example. (Here no distinction between tokens and elements is necessary.) A lattice diagram is also illustrated.

A TREE



A ROUGH PICTURE



A LATTICE



The root node is the element $\perp$ of $|\mathcal{D}|$; there need be no top node $\top$. *Approximation* is represented by a passage from a lower node to a higher node along the rising lines. The system $\mathcal{D}$ of neighbourhoods is the collection of sets each of which is all

the nodes above a given node. For infinite examples, however, care must be given to introduce limit nodes. The first few exercises should be provided with pictures to illustrate the structure.

3.2.19 Exercise 1.12 — final segments of integers

Exercise_1_12.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise112

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem

def tail (n : ℕ) : Set ℕ := {m | n ≤ m}

@[simp] theorem mem_tail {n m : ℕ} : m ∈ tail n ↔ n ≤ m := Iff.rfl

def mem (X : Set ℕ) : Prop := ∃ n, X = tail n

theorem tail_inter (n m : ℕ) : tail n ∩ tail m = tail (max n m) := by
  ext k
  simp only [Set.mem_inter_iff, mem_tail]
  omega

theorem tail_subset_iff {n m : ℕ} : tail n ⊆ tail m ↔ m ≤ n := by
  constructor
  · intro h
    exact h (show n ∈ tail n from le_refl n)
  · intro hmn k hk
    exact le_trans hmn hk

theorem nestedOrDisjoint : NestedOrDisjoint mem := by
  rintro X Y ⟨n, rfl⟩ ⟨m, rfl⟩
  rcases le_total n m with h | h
  · exact Or.inr (Or.inl (tail_subset_iff.mpr h))
  · exact Or.inl (tail_subset_iff.mpr h)

def neighborhoodSystem : NeighborhoodSystem ℕ :=
  ofNestedOrDisjoint mem (tail 0) ⟨0, Nat.zero_le 0⟩ ⟨0, rfl⟩ nestedOrDisjoint
    (fun {X} hX => by obtain ⟨n, rfl⟩ := hX; exact tail_subset_iff.mpr (Nat.zero_le n))

@[simp] theorem ns_mem {X : Set ℕ} : neighborhoodSystem.mem X ↔ ∃ n, X = tail n := Iff
    .rfl

theorem mem_tail_nbhd (n : ℕ) : neighborhoodSystem.mem (tail n) := ⟨n, rfl⟩

def fin (n : ℕ) : neighborhoodSystem.Element := neighborhoodSystem.principal (
    mem_tail_nbhd n)

def top : neighborhoodSystem.Element where
  mem X := neighborhoodSystem.mem X
  sub h := h
  master_mem := neighborhoodSystem.master_mem
  inter_mem := by
```

```
    rintro X Y ⟨n, rfl⟩ ⟨m, rfl⟩
    exact ⟨max n m, tail_inter n m⟩
  up_mem _ hY _ := hY

@[simp] theorem mem_top {X : Set ℕ} : top.mem X ↔ neighborhoodSystem.mem X := Iff.rfl

theorem element_eq (x : neighborhoodSystem.Element) :
    (∃ n, x = fin n) ∨ x = top := by
  classical
  by_cases h : ∀ n, x.mem (tail n)
  · refine Or.inr ?_
    apply Element.ext
    intro X
    constructor
    · intro hx; exact x.sub hx
    · rintro ⟨n, rfl⟩; exact h n
  · refine Or.inl ?_
    have h' : ∃ n, ¬ x.mem (tail n) := not_forall.mp h
    have hpos : ∀ n, ¬ x.mem (tail n) → 0 < n := by
      intro n hn
      rcases Nat.eq_zero_or_pos n with rfl | hp
      · exact absurd x.master_mem hn
      · exact hp
    have hspec : ¬ x.mem (tail (Nat.find h')) := Nat.find_spec h'
    have hmin : ∀ j, j < Nat.find h' → x.mem (tail j) := by
      intro j hj
      by_contra hc
      exact Nat.find_min h' hj hc
    have hn₀ : 0 < Nat.find h' := hpos _ hspec
    refine ⟨Nat.find h' - 1, ?_⟩
    apply Element.ext
    intro X
    have key : ∀ j, x.mem (tail j) ↔ j ≤ Nat.find h' - 1 := by
      intro j
      constructor
      · intro hj
        by_contra hc
        have hle : Nat.find h' ≤ j := by omega
        exact hspec (x.up_mem hj (mem_tail_nbhd (Nat.find h')) (tail_subset_iff.mpr
   hle))
      · intro hj
        exact hmin j (by omega)
    constructor
    · intro hx
      obtain ⟨j, rfl⟩ := x.sub hx
      exact ⟨mem_tail_nbhd j, tail_subset_iff.mpr ((key j).mp hx)⟩
    · rintro ⟨hX, hsub⟩
      obtain ⟨j, rfl⟩ := hX
      exact (key j).mpr (tail_subset_iff.mp hsub)

theorem fin_le_iff (n m : ℕ) : fin n ≤ fin m ↔ n ≤ m := by
  rw [fin, fin, neighborhoodSystem.principal_le_iff, tail_subset_iff]

theorem fin_strictMono : StrictMono fin := by
  intro n m hnm
  refine lt_of_le_of_ne ((fin_le_iff n m).mpr hnm.le) ?_
```

```
  intro heq
  have : m ≤ n := (fin_le_iff m n).mp (le_of_eq heq.symm)
  exact absurd (le_antisymm hnm.le this) (Nat.ne_of_lt hnm)

theorem le_top (x : neighborhoodSystem.Element) : x ≤ top :=
  fun _ hX => x.sub hX

theorem top_isTotal : neighborhoodSystem.IsTotal top :=
  fun y _ => le_top y

theorem isTotal_iff_top (x : neighborhoodSystem.Element) :
    neighborhoodSystem.IsTotal x ↔ x = top := by
  constructor
  · intro h
    exact le_antisymm (le_top x) (h top (le_top x))
  · rintro rfl; exact top_isTotal

end DomainTheory.NeighbourhoodSystems.Exercise112
```

EXERCISE 1.12. Let $\Delta = \mathbb{N} = \{0, 1, 2, \ldots, n, \ldots\}$ be the set of non-negative integers. Use as neighbourhoods final segments:

$$\{m \in \mathbb{N} \mid m > n\}$$

for $n \in \mathbb{N}$. Verify that this is a neighbourhood system. What are the total elements? What are the finite elements? Draw a picture of the approximation relation in this domain. (Hint: there is only one limit element.)

3.2.20 Exercise 1.13 — infinite binary tree

Exercise_1_13.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Theorem_1_11
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.DomainIso

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems.Exercise113
section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ExampleB

theorem branch_isTotal (p : ℕ → Bool) : B.IsTotal (branch p) := by
  intro y hy X hX
  obtain ⟨σ, rfl⟩ := y.sub hX
  have hk : y.mem (cone (prefixSeq p σ.length)) :=
    hy _ ((branch_mem_iff p).mpr ⟨σ.length, List.prefix_rfl⟩)
  rcases prefix_comparable_of_mem y hX hk with h | h
  · exact (branch_mem_iff p).mpr ⟨σ.length, h⟩
  · have hlen : (prefixSeq p σ.length).length = σ.length := prefixSeq_length p σ.length
```

```
    have hσ : prefixSeq p σ.length = σ := h.eq_of_length hlen
    exact (branch_mem_iff p).mpr ⟨σ.length, by rw [hσ]⟩

section
set_option linter.unusedVariables false

theorem example_113 : ∀ (p : Nat → Bool),
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsTotal DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
    DomainTheory.NeighbourhoodSystems.ExampleB.B (DomainTheory.NeighbourhoodSystems.
    Exercise113.branch p) :=
  DomainTheory.NeighbourhoodSystems.Exercise113.branch_isTotal
end
end

end DomainTheory.NeighbourhoodSystems.Exercise113
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

theorem le_iInter (x : ℕ → V.Element) (y : V.Element) (h : ∀ n, y ≤ x n) :
    y ≤ V.iInter x :=
  fun X hX n => h n X hX

theorem le_iUnion (x : ℕ → V.Element) (hmono : Monotone x) (n : ℕ) :
    x n ≤ V.iUnion x hmono :=
  fun _ hX => ⟨n, hX⟩
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise113
section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ExampleB

theorem branchSeq_le_branch (p : ℕ → Bool) (n : ℕ) : branchSeq p n ≤ branch p :=
  B.le_iUnion (branchSeq p) (branchSeq_mono p) n
end

end DomainTheory.NeighbourhoodSystems.Exercise113
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

theorem interUpTo_antitone (X : ℕ → Set α) {j k : ℕ} (h : j ≤ k) :
    V.interUpTo X k ⊆ V.interUpTo X j := by
  induction k with
  | zero => rw [Nat.le_zero.mp h]
  | succ k ih =>
    rcases Nat.eq_or_lt_of_le h with h' | h'
    · rw [h']
```

```
    · exact Set.inter_subset_left.trans (ih (Nat.lt_succ_iff.mp h'))
end

end NeighborhoodSystem

end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 1.13. Verify all the assertions made about the system B defined as the infinite generalization of Example 1.4. Draw a picture similar to that given in the text which includes nodes for all $\sigma \in \Sigma^*$. Show the neighbourhoods, how the approximation relation behaves, and where the total elements lie. (The picture is closely related to the "binary tree", but has to have limit nodes all along the top.)

3.2.21 Exercise 1.14 — finite nonempty subsets

Exercise_1_14.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.DomainIso

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems.Exercise114
section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem

def mem (X : Set ℕ) : Prop := X = Set.univ ∨ (X.Finite ∧ X.Nonempty)

theorem nonempty_of_mem {X : Set ℕ} (h : mem X) : X.Nonempty := by
  rcases h with rfl | h
  · exact Set.univ_nonempty
  · exact h.2

def neighborhoodSystem : NeighborhoodSystem ℕ where
  mem
  master := Set.univ
  master_nonempty := Set.univ_nonempty
  master_mem := Or.inl rfl
  inter_mem := by
    intro X Y Z hX hY hZ hZsub
    have hne : (X ∩ Y).Nonempty := (nonempty_of_mem hZ).mono hZsub
    rcases hX with hX | hX
    · rw [hX, Set.univ_inter]; exact hY
    · rcases hY with hY | hY
      · rw [hY, Set.inter_univ]; exact Or.inr hX
      · exact Or.inr ⟨hX.1.inter_of_left Y, hne⟩
  sub_master := fun _ => Set.subset_univ _

@[simp] theorem ns_mem {X : Set ℕ} : neighborhoodSystem.mem X ↔ mem X := Iff.rfl

def bot : neighborhoodSystem.Element := neighborhoodSystem.bot
```

```
def fin {X : Set ℕ} (h : neighborhoodSystem.mem X) : neighborhoodSystem.Element :=
  neighborhoodSystem.principal h

theorem empty_not_mem : ¬ mem (∅ : Set ℕ) := by
  rintro (h | ⟨_, h⟩)
  · exact Set.empty_ne_univ h
  · exact Set.not_nonempty_empty h

theorem mem_singleton (n : ℕ) : mem {n} :=
  Or.inr ⟨Set.finite_singleton n, Set.singleton_nonempty n⟩

theorem singleton_isTotal (n : ℕ) :
    neighborhoodSystem.IsTotal (neighborhoodSystem.principal (mem_singleton n)) := by
  intro y hy W hW
  have hn : y.mem {n} := hy {n} ⟨mem_singleton n, subset_rfl⟩
  refine ⟨y.sub hW, ?_⟩
  by_contra hc
  rw [Set.singleton_subset_iff] at hc
  have hempty : ({n} : Set ℕ) ∩ W = (∅ : Set ℕ) := by
    ext k
    simp only [Set.mem_inter_iff, Set.mem_singleton_iff, Set.mem_empty_iff_false,
    iff_false]
    rintro ⟨rfl, hk⟩
    exact hc hk
  have hi := y.inter_mem hn hW
  rw [hempty] at hi
  exact empty_not_mem (y.sub hi)

section
set_option linter.unusedVariables false

theorem example_114 : ∀ (n : Nat),
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsTotal Nat
    DomainTheory.NeighbourhoodSystems.Exercise114.neighborhoodSystem
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal Nat
      DomainTheory.NeighbourhoodSystems.Exercise114.neighborhoodSystem
      (@Singleton.singleton Nat (Set Nat) (@Set.instSingletonSet Nat) n)
      (DomainTheory.NeighbourhoodSystems.Exercise114.mem_singleton n)) :=
  DomainTheory.NeighbourhoodSystems.Exercise114.singleton_isTotal
end
end

end DomainTheory.NeighbourhoodSystems.Exercise114
end
```

EXERCISE 1.14. Let $\Delta = \mathbb{N}$ and let $\mathcal{V}$ be the family of finite non-empty subsets of Δ plus the set Δ. Show that this is a neighbourhood system. What are the total elements? What are the finite elements? Draw a picture.

3.2.22 Exercise 1.15 — finite elements without chains

Exercise_1_15.lean

```
module

import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.Factoid_1_8
import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.Factoid_1_7
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.DomainIso
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.bot
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_4

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems.Exercise115
section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem

def flatMem (X : Set ℕ) : Prop := X = Set.univ ∨ ∃ n, X = {n}

theorem singleton_disjoint {n m : ℕ} (h : n = m) : ({n} : Set ℕ) ∩ {m} = ∅ := by
  ext k
  simp only [Set.mem_inter_iff, Set.mem_singleton_iff, Set.mem_empty_iff_false,
    iff_false]
  rintro ⟨rfl, h2⟩
  exact h h2

theorem flatNOD : NestedOrDisjoint flatMem := by
  rintro X Y (rfl | ⟨n, rfl⟩) (rfl | ⟨m, rfl⟩)
  · exact Or.inl (subset_refl _)
  · exact Or.inr (Or.inl (Set.subset_univ _))
  · exact Or.inl (Set.subset_univ _)
  · rcases eq_or_ne n m with rfl | h
    · exact Or.inl (subset_refl _)
    · exact Or.inr (Or.inr (singleton_disjoint h))

def flat : NeighborhoodSystem ℕ :=
  ofNestedOrDisjoint flatMem Set.univ Set.univ_nonempty
    (Or.inl rfl) flatNOD (fun _ => Set.subset_univ _)

@[simp] theorem flat_mem {X : Set ℕ} : flat.mem X ↔ X = Set.univ ∨ ∃ n, X = {n} :=
    Iff.rfl

@[simp] theorem flat_master : flat.master = Set.univ := rfl

def stemMem (X : Set ℕ) : Prop := X = Set.univ ∨ X = {0, 1} ∨ ∃ n, X = {n}

theorem stemNOD : NestedOrDisjoint stemMem := by
  have pair_single : ∀ m : ℕ, ({m} : Set ℕ) ⊆ {0, 1} ∨ ({0, 1} : Set ℕ) ∩ {m} = ∅ :=
    by
    intro m
    by_cases h : m = 0 ∨ m = 1
    · refine Or.inl ?_
      rcases h with rfl | rfl <;> intro k hk <;> simp_all
    · refine Or.inr ?_
      ext k
      simp only [Set.mem_inter_iff, Set.mem_insert_iff, Set.mem_singleton_iff,
```

```
        Set.mem_empty_iff_false, iff_false, not_and]
      rintro (rfl | rfl) rfl <;> simp_all
  rintro X Y (rfl | rfl | ⟨n, rfl⟩) (rfl | rfl | ⟨m, rfl⟩)
  · exact Or.inl (subset_refl _)
  · exact Or.inr (Or.inl (Set.subset_univ _))
  · exact Or.inr (Or.inl (Set.subset_univ _))
  · exact Or.inl (Set.subset_univ _)
  · exact Or.inl (subset_refl _)
  · rcases pair_single m with h | h
    · exact Or.inr (Or.inl h)
    · exact Or.inr (Or.inr h)
  · exact Or.inl (Set.subset_univ _)
  · rcases pair_single n with h | h
    · exact Or.inl h
    · exact Or.inr (Or.inr (by rw [Set.inter_comm]; exact h))
  · rcases eq_or_ne n m with rfl | h
    · exact Or.inl (subset_refl _)
    · exact Or.inr (Or.inr (singleton_disjoint h))

def stem : NeighborhoodSystem ℕ :=
  ofNestedOrDisjoint stemMem Set.univ Set.univ_nonempty
    (Or.inl rfl) stemNOD (fun _ => Set.subset_univ _)

@[simp] theorem stem_mem {X : Set ℕ} :
    stem.mem X ↔ X = Set.univ ∨ X = {0, 1} ∨ ∃ n, X = {n} := Iff.rfl

theorem flat_empty_not_mem : ¬ flat.mem (∅ : Set ℕ) := by
  rintro (h | ⟨n, h⟩)
  · exact Set.empty_ne_univ h
  · exact absurd h.symm (Set.singleton_ne_empty n)

theorem flat_mem_singleton (n : ℕ) : flat.mem {n} := Or.inr ⟨n, rfl⟩

theorem flat_classify (x : flat.Element) :
    x = flat.bot ∨ ∃ n, x = flat.principal (flat_mem_singleton n) := by
  classical
  by_cases h : ∃ n, x.mem {n}
  · obtain ⟨n, hn⟩ := h
    refine Or.inr ⟨n, ?_⟩
    have huniq : ∀ m, x.mem {m} → m = n := by
      intro m hm
      by_contra hmn
      have hi : x.mem (({m} : Set ℕ) ∩ {n}) := x.inter_mem hm hn
      rw [singleton_disjoint hmn] at hi
      exact flat_empty_not_mem (x.sub hi)
    apply Element.ext
    intro W
    constructor
    · intro hx
      rcases (x.sub hx) with rfl | ⟨k, rfl⟩
      · exact ⟨Or.inl rfl, Set.subset_univ _⟩
      · obtain rfl := huniq k hx
        exact ⟨flat_mem_singleton k, subset_rfl⟩
    · rintro ⟨hWmem, hsub⟩
      exact x.up_mem hn hWmem hsub
  · refine Or.inl ?_
```

```
    apply Element.ext
    intro W
    rw [flat.mem_bot]
    constructor
    · intro hx
      rcases (x.sub hx) with rfl | ⟨k, rfl⟩
      · rfl
      · exact absurd ⟨k, hx⟩ h
    · rintro rfl
      exact x.master_mem

theorem flat_all_finite (x : flat.Element) : ∃ (X : Set ℕ) (h : flat.mem X), x = flat.
    principal h := by
  rcases flat_classify x with rfl | ⟨n, rfl⟩
  · exact ⟨flat.master, flat.master_mem, rfl⟩
  · exact ⟨{n}, flat_mem_singleton n, rfl⟩

theorem flat_atom_maximal (n : ℕ) (y : flat.Element)
    (hle : flat.principal (flat_mem_singleton n) ≤ y) :
    y = flat.principal (flat_mem_singleton n) := by
  rcases flat_classify y with rfl | ⟨m, rfl⟩
  · exfalso
    have hmem : flat.bot.mem {n} := hle {n} ⟨flat_mem_singleton n, subset_rfl⟩
    rw [flat.mem_bot, flat_master] at hmem
    have : (n + 1) ∈ ({n} : Set ℕ) := by rw [hmem]; exact Set.mem_univ _
    simp at this
  · have hsub : ({m} : Set ℕ) ⊆ {n} :=
      (flat.principal_le_iff (flat_mem_singleton n) (flat_mem_singleton m)).mp hle
    obtain rfl : m = n := Set.mem_singleton_iff.mp (Set.singleton_subset_iff.mp hsub)
    rfl

theorem flat_infinite : Function.Injective (fun n => flat.principal (
    flat_mem_singleton n)) := by
  intro n m h
  have := flat.principal_injective (flat_mem_singleton n) (flat_mem_singleton m) h
  exact Set.singleton_injective this

theorem flat_no_three_chain : ¬ ∃ a b c : flat.Element, a < b ∧ b < c := by
  rintro ⟨a, b, c, hab, hbc⟩
  rcases flat_classify b with rfl | ⟨n, rfl⟩
  · exact absurd (le_antisymm hab.le (flat.bot_le a)) (ne_of_lt hab)
  · exact (ne_of_lt hbc) (flat_atom_maximal n c hbc.le).symm

theorem flat_no_infinite_chain : ¬ ∃ f : ℕ → flat.Element, StrictMono f := by
  rintro ⟨f, hf⟩
  exact flat_no_three_chain
    ⟨f 0, f 1, f 2, hf (by norm_num), hf (by norm_num)⟩

theorem stem_mem_pair : stem.mem {0, 1} := Or.inr (Or.inl rfl)

theorem stem_mem_univ : stem.mem Set.univ := Or.inl rfl

theorem stem_mem_zero : stem.mem {0} := Or.inr (Or.inr ⟨0, rfl⟩)

theorem stem_principal_lt {X Y : Set ℕ} (hX : stem.mem X) (hY : stem.mem Y)
    (hYX : Y ⊆ X) (hne : X = Y) : stem.principal hX < stem.principal hY := by
```

```
  rw [lt_iff_le_and_ne]
  refine ⟨(stem.principal_le_iff hX hY).mpr hYX, ?_⟩
  intro he
  exact hne (stem.principal_injective hX hY he)

theorem stem_three_chain : ∃ a b c : stem.Element, a < b ∧ b < c := by
  refine ⟨stem.principal stem_mem_univ, stem.principal stem_mem_pair,
    stem.principal stem_mem_zero, ?_, ?_⟩
  · refine stem_principal_lt stem_mem_univ stem_mem_pair (Set.subset_univ _) ?_
    intro h
    have : (2 : ℕ) ∈ ({0, 1} : Set ℕ) := h ▸ Set.mem_univ 2
    simp at this
  · refine stem_principal_lt stem_mem_pair stem_mem_zero
      (Set.singleton_subset_iff.mpr (by simp)) ?_
    intro h
    have : (1 : ℕ) ∈ ({0} : Set ℕ) := h ▸ (by simp : (1 : ℕ) ∈ ({0, 1} : Set ℕ))
    simp at this
end

end DomainTheory.NeighbourhoodSystems.Exercise115

namespace DomainTheory.NeighbourhoodSystems.Exercise115
section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem

theorem not_isomorphic : ¬ (flat ≅? stem) := by
  rintro ⟨e⟩
  obtain ⟨a, b, c, hab, hbc⟩ := stem_three_chain
  exact flat_no_three_chain
    ⟨e.symm a, e.symm b, e.symm c, e.symm.lt_iff_lt.mpr hab, e.symm.lt_iff_lt.mpr hbc⟩

section
set_option linter.unusedVariables false

theorem example_115 : Not
  (@DomainTheory.NeighbourhoodSystems.Isomorphic Nat Nat DomainTheory.
    NeighbourhoodSystems.Exercise115.flat
    DomainTheory.NeighbourhoodSystems.Exercise115.stem) :=
  DomainTheory.NeighbourhoodSystems.Exercise115.not_isomorphic
end
end

end DomainTheory.NeighbourhoodSystems.Exercise115
end
```

EXERCISE 1.15. Construct non-isomorphic infinite domains where all elements are finite but where there are no infinite chains $\langle x_n \rangle_{n=0}^{\infty}$ of elements with $x_n \sqsubseteq x_{n+1}$ but $x_n \neq x_{n+1}$ for all n.

3.2.23 Exercise 1.16 — cofinite integer subsets

Exercise_1_16.lean

```
module
```

```
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.DomainIso
public import Mathlib.Algebra.Group.End
public import Mathlib.Basic.Finite.Defs

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace Cofinite
section

open NeighborhoodSystem

def cofiniteSystem : NeighborhoodSystem ℕ where
  mem X := X?.Finite
  master := Set.univ
  master_nonempty := Set.univ_nonempty
  master_mem := by rw [Set.compl_univ]; exact Set.finite_empty
  inter_mem := by
    intro X Y _ hX hY _ _
    rw [Set.compl_inter]
    exact hX.union hY
  sub_master := fun _ => Set.subset_univ _

@[simp] theorem cofiniteSystem_mem {X : Set ℕ} : cofiniteSystem.mem X ↔ X?.Finite :=
    Iff.rfl

def ofExcluded (E : Set ℕ) : cofiniteSystem.Element where
  mem Y := Y?.Finite ∧ Y? ⊆ E
  sub h := h.1
  master_mem := by
    show (Set.univ : Set ℕ)?.Finite ∧ (Set.univ : Set ℕ)? ⊆ E
    rw [Set.compl_univ]
    exact ⟨Set.finite_empty, Set.empty_subset E⟩
  inter_mem := by
    rintro Y1 Y2 ⟨hf1, hs1⟩ ⟨hf2, hs2⟩
    rw [Set.compl_inter]
    exact ⟨hf1.union hf2, Set.union_subset hs1 hs2⟩
  up_mem := by
    rintro Y1 Y2 ⟨_, hs1⟩ hY2 hsub
    exact ⟨hY2, (Set.compl_subset_compl.mpr hsub).trans hs1⟩

@[simp] theorem mem_ofExcluded {E Y : Set ℕ} :
    (ofExcluded E).mem Y ↔ Y?.Finite ∧ Y? ⊆ E := Iff.rfl

def toExcluded (x : cofiniteSystem.Element) : Set ℕ := {n | x.mem ({n}?)}

@[simp] theorem mem_toExcluded {x : cofiniteSystem.Element} {n : ℕ} :
    n ∈ toExcluded x ↔ x.mem ({n}?) := Iff.rfl

def fullSystem : NeighborhoodSystem ℕ where
  mem _ := True
  master := Set.univ
  master_nonempty := Set.univ_nonempty
  master_mem := trivial
  inter_mem := fun _ _ _ _ => trivial
```

```
  sub_master := fun _ => Set.subset_univ _

theorem mem_compl_of_finite (x : cofiniteSystem.Element) {F : Set ℕ} (hF : F.Finite) :
    (∀ n ∈ F, x.mem ({n}?)) → x.mem (F?) := by
  induction F, hF using Set.Finite.induction_on with
  | empty => intro _; rw [Set.compl_empty]; exact x.master_mem
  | @insert a s _ _ ih =>
    intro h
    rw [Set.insert_eq, Set.compl_union]
    exact x.inter_mem (h a (Set.mem_insert a s))
      (ih (fun n hn => h n (Set.mem_insert_of_mem a hn)))

theorem mem_compl_singleton (n : ℕ) : cofiniteSystem.mem (({n} : Set ℕ)?) := by
  rw [cofiniteSystem_mem, compl_compl]
  exact Set.finite_singleton n

theorem subset_compl_singleton {Y : Set ℕ} {n : ℕ} (hn : n ∈ Y?) : Y ⊆ ({n} : Set ℕ)?
    := by
  intro m hm
  rw [Set.mem_compl_iff, Set.mem_singleton_iff]
  rintro rfl
  exact hn hm

theorem ofExcluded_toExcluded (x : cofiniteSystem.Element) :
    ofExcluded (toExcluded x) = x := by
  apply Element.ext
  intro Y
  rw [mem_ofExcluded]
  constructor
  · rintro ⟨hfin, hsub⟩
    have h := mem_compl_of_finite x hfin (fun n hn => mem_toExcluded.mp (hsub hn))
    rwa [compl_compl] at h
  · intro hxY
    refine ⟨x.sub hxY, ?_⟩
    intro n hn
    rw [mem_toExcluded]
    exact x.up_mem hxY (mem_compl_singleton n) (subset_compl_singleton hn)

theorem toExcluded_ofExcluded (E : Set ℕ) : toExcluded (ofExcluded E) = E := by
  ext n
  rw [mem_toExcluded, mem_ofExcluded]
  simp [compl_compl, Set.finite_singleton, Set.singleton_subset_iff]

def cofiniteIso : cofiniteSystem.Element ≃o Set ℕ where
  toFun := toExcluded
  invFun := ofExcluded
  left_inv := ofExcluded_toExcluded
  right_inv := toExcluded_ofExcluded
  map_rel_iff' := by
    intro x x'
    constructor
    · intro h Y hY
      have hfin : Y?.Finite := x.sub hY
      have hsub : Y? ⊆ toExcluded x' := by
        intro n hn
        have hx : x.mem (({n} : Set ℕ)?) :=
```

```
          x.up_mem hY (mem_compl_singleton n) (subset_compl_singleton hn)
        exact h (mem_toExcluded.mpr hx)
      have h2 := mem_compl_of_finite x' hfin (fun n hn => mem_toExcluded.mp (hsub hn))
      rwa [compl_compl] at h2
    · intro h n hn
      exact mem_toExcluded.mpr (h _ (mem_toExcluded.mp hn))

theorem le_ofExcluded_univ (x : cofiniteSystem.Element) :
    x ≤ ofExcluded Set.univ := by
  intro Y hY
  exact ⟨x.sub hY, Set.subset_univ _⟩

theorem ofExcluded_univ_isTotal : cofiniteSystem.IsTotal (ofExcluded Set.univ) :=
  fun y _ => le_ofExcluded_univ y
end

end Cofinite
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Cofinite
section

set_option linter.unusedVariables false

theorem example_116 : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsTotal
    Nat
  DomainTheory.NeighbourhoodSystems.Cofinite.cofiniteSystem
  (DomainTheory.NeighbourhoodSystems.Cofinite.ofExcluded (@Set.univ Nat)) :=
  DomainTheory.NeighbourhoodSystems.Cofinite.ofExcluded_univ_isTotal
end

end DomainTheory.NeighbourhoodSystems.Cofinite
end
```

EXERCISE 1.16. Let $\Delta = \mathbf{N}$ and let $\mathcal{D}$ be the family of *cofinite* subsets of $\mathbf{N}$. Show that $|\mathcal{D}|$ is isomorphic to the partially ordered set of *all* subsets of $\mathbf{N}$ under inclusion. Construct some other neighbourhood systems where $\mathcal{D}$ is closed under finite intersection. What happens to the total elements in such systems?

3.2.24 Exercise 1.17 — rational open intervals

Let $\Delta = \mathbf{R}$ be the real line. Let $\mathcal{D}$ be the set of non-empty open intervals with rational end points plus the set Δ. Show that this is a neighbourhood system. For any real $t \in \mathbf{R}$, show that $\{X \in \mathcal{D} \mid t \in X\}$ is a filter. Is it always total? What are the total elements of $|\mathcal{D}|$? (Hint: When t is rational consider all intervals with t as a right-hand end point.)

Exercise_1_17.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.Element
public import Mathlib.Basic.Real.Basic

@[expose] public section

section
```

```
namespace DomainTheory.NeighbourhoodSystems
namespace RatInterval
section

open NeighborhoodSystem

def ratIntervalMem (X : Set ?) : Prop :=
  X = Set.univ ∨ ∃ a b : ?, a < b ∧ X = Set.Ioo (a : ?) (b : ?)

theorem inter_mem' {X Y : Set ?} (hX : ratIntervalMem X) (hY : ratIntervalMem Y)
    (hne : (X ∩ Y).Nonempty) : ratIntervalMem (X ∩ Y) := by
  rcases hX with rfl | ⟨a, b, hab, rfl⟩
  · rw [Set.univ_inter]; exact hY
  · rcases hY with rfl | ⟨c, d, hcd, rfl⟩
    · rw [Set.inter_univ]; exact Or.inr ⟨a, b, hab, rfl⟩
    · obtain ⟨z, ⟨hza, hzb⟩, hzc, hzd⟩ := hne
      have had : a < d := by exact_mod_cast hza.trans hzd
      have hcb : c < b := by exact_mod_cast hzc.trans hzb
      have hlt : max a c < min b d := by
        simp only [max_lt_iff, lt_min_iff]
        exact ⟨⟨hab, hcb⟩, had, hcd⟩
      have hset : Set.Ioo (a : ?) b ∩ Set.Ioo (c : ?) d
          = Set.Ioo ((max a c : ?) : ?) ((min b d : ?) : ?) := by
        rw [Set.Ioo_inter_Ioo, Rat.cast_max, Rat.cast_min]
      exact Or.inr ⟨max a c, min b d, hlt, hset⟩

theorem ratIntervalMem_nonempty {X : Set ?} (hX : ratIntervalMem X) : X.Nonempty := by
  rcases hX with rfl | ⟨a, b, hab, rfl⟩
  · exact ⟨0, Set.mem_univ 0⟩
  · rw [Set.nonempty_Ioo]; exact_mod_cast hab

def ratIntervalSystem : NeighborhoodSystem ? where
  mem := ratIntervalMem
  master := Set.univ
  master_nonempty := Set.univ_nonempty
  master_mem := Or.inl rfl
  inter_mem := by
    intro X Y Z hX hY hZ hZsub
    exact inter_mem' hX hY ((ratIntervalMem_nonempty hZ).mono hZsub)
  sub_master := fun _ => Set.subset_univ _

@[simp] theorem ratIntervalSystem_mem {X : Set ?} :
    ratIntervalSystem.mem X ↔ ratIntervalMem X := Iff.rfl

def filterAt (t : ?) : ratIntervalSystem.Element where
  mem X := ratIntervalMem X ∧ t ∈ X
  sub h := h.1
  master_mem := ⟨Or.inl rfl, Set.mem_univ t⟩
  inter_mem := by
    rintro X Y ⟨hX, htX⟩ ⟨hY, htY⟩
    exact ⟨inter_mem' hX hY ⟨t, htX, htY⟩, htX, htY⟩
  up_mem := by
    rintro X Y ⟨_, htX⟩ hY hXY
    exact ⟨hY, hXY htX⟩

@[simp] theorem mem_filterAt {t : ?} {X : Set ?} :
```

```
    (filterAt t).mem X ↔ ratIntervalMem X ∧ t ∈ X := Iff.rfl

theorem filterAt_injective {s t : ?} (h : filterAt s = filterAt t) : s = t := by
  by_contra hst
  rcases lt_or_gt_of_ne hst with hlt | hlt
  · obtain ⟨a, ha1, ha2⟩ := exists_rat_btwn hlt
    obtain ⟨b, hb⟩ := exists_rat_gt t
    have hint : ratIntervalMem (Set.Ioo (a : ?) (b : ?)) :=
      Or.inr ⟨a, b, by exact_mod_cast ha2.trans hb, rfl⟩
    have htmem : (filterAt t).mem (Set.Ioo (a : ?) (b : ?)) := ⟨hint, ha2, hb⟩
    rw [← h] at htmem
    exact absurd htmem.2.1 (not_lt.mpr ha1.le)
  · obtain ⟨a, ha1, ha2⟩ := exists_rat_btwn hlt
    obtain ⟨b, hb⟩ := exists_rat_gt s
    have hint : ratIntervalMem (Set.Ioo (a : ?) (b : ?)) :=
      Or.inr ⟨a, b, by exact_mod_cast ha2.trans hb, rfl⟩
    have hsmem : (filterAt s).mem (Set.Ioo (a : ?) (b : ?)) := ⟨hint, ha2, hb⟩
    rw [h] at hsmem
    exact absurd hsmem.2.1 (not_lt.mpr ha1.le)
end

end RatInterval
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.RatInterval
section

set_option linter.unusedVariables false

theorem example_117 : And
  (∀ {s t : Real},
    @Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Real
          DomainTheory.NeighbourhoodSystems.RatInterval.ratIntervalSystem)
        (DomainTheory.NeighbourhoodSystems.RatInterval.filterAt s)
        (DomainTheory.NeighbourhoodSystems.RatInterval.filterAt t) →
      @Eq Real s t)
  (∀ {X Y : Set Real},
    DomainTheory.NeighbourhoodSystems.RatInterval.ratIntervalMem X →
      DomainTheory.NeighbourhoodSystems.RatInterval.ratIntervalMem Y →
        @Set.Nonempty Real (@Inter.inter (Set Real) (@Set.instInter Real) X Y) →
          DomainTheory.NeighbourhoodSystems.RatInterval.ratIntervalMem
            (@Inter.inter (Set Real) (@Set.instInter Real) X Y)) :=
  @And.intro
  (∀ {s t : Real},
    @Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Real
          DomainTheory.NeighbourhoodSystems.RatInterval.ratIntervalSystem)
        (DomainTheory.NeighbourhoodSystems.RatInterval.filterAt s)
        (DomainTheory.NeighbourhoodSystems.RatInterval.filterAt t) →
      @Eq Real s t)
  (∀ {X Y : Set Real},
    DomainTheory.NeighbourhoodSystems.RatInterval.ratIntervalMem X →
      DomainTheory.NeighbourhoodSystems.RatInterval.ratIntervalMem Y →
        @Set.Nonempty Real (@Inter.inter (Set Real) (@Set.instInter Real) X Y) →
          DomainTheory.NeighbourhoodSystems.RatInterval.ratIntervalMem
            (@Inter.inter (Set Real) (@Set.instInter Real) X Y))
```

```
  @DomainTheory.NeighbourhoodSystems.RatInterval.filterAt_injective
  @DomainTheory.NeighbourhoodSystems.RatInterval.inter_mem'
end

end DomainTheory.NeighbourhoodSystems.RatInterval
end
```

3.2.25 Exercise 1.18 — consistency of neighbourhood families

Exercise_1_18.lean

```
module

import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.Factoid_1_5
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_1
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_19

@[expose] public section

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

def FinitelyConsistent (C : Set (Set α)) : Prop :=
  ∀ (n : ℕ) (X : ℕ → Set α), (∀ i, i < n → X i ∈ C) → V.Consistent X n

end NeighborhoodSystem

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

def appendSeq {α : Type*} (X1 : ℕ → Set α) (n1 : ℕ) (X2 : ℕ → Set α) : ℕ → Set α :=
  fun i => if i < n1 then X1 i else X2 (i - n1)

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false
```

```
namespace DomainTheory.NeighbourhoodSystems

theorem appendSeq_mem {α : Type*} {C : Set (Set α)} {X1 : ℕ → Set α} {n1 : ℕ}
    {X2 : ℕ → Set α} {n2 : ℕ} (h1 : ∀ i, i < n1 → X1 i ∈ C) (h2 : ∀ i, i < n2 → X2 i
     ∈ C) :
    ∀ i, i < n1 + n2 → appendSeq X1 n1 X2 i ∈ C := by
  intro i hi
  simp only [appendSeq]
  by_cases h : i < n1
  · rw [ite_eq_left h]; exact h1 i h
  · rw [ite_eq_right h]; exact h2 (i - n1) (by omega)

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace triSys

def A : Set (Fin 3) := {0, 1}

end triSys

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace triSys

def B : Set (Fin 3) := {1, 2}

end triSys

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace triSys

def Cc : Set (Fin 3) := {0, 2}
```

```
end triSys

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace triSys

def family : Set (Set (Fin 3)) := {A, B, Cc}

end triSys

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

theorem interUpTo_appendSeq_left (X1 : ℕ → Set α) (n1 : ℕ) (X2 : ℕ → Set α) :
    ∀ {k : ℕ}, k ≤ n1 → V.interUpTo (appendSeq X1 n1 X2) k = V.interUpTo X1 k := by
  intro k
  induction k with
  | zero => intro _; rfl
  | succ k ih =>
    intro hk
    rw [interUpTo_succ, interUpTo_succ, ih (Nat.le_of_succ_le hk)]
    have happ : appendSeq X1 n1 X2 k = X1 k := by
      simp only [appendSeq, ite_eq_left (Nat.lt_of_succ_le hk)]
    rw [happ]

end NeighborhoodSystem

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)
```

```
theorem interUpTo_subset_master (X : ℕ → Set α) : ∀ n, V.interUpTo X n ⊆ V.master :=
    by
  intro n
  induction n with
  | zero => exact subset_rfl
  | succ n ih => exact Set.inter_subset_left.trans ih

end NeighborhoodSystem

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

theorem interUpTo_appendSeq (X1 : ℕ → Set α) (n1 : ℕ) (X2 : ℕ → Set α) :
    ∀ {j : ℕ}, V.interUpTo (appendSeq X1 n1 X2) (n1 + j)
      = V.interUpTo X1 n1 ∩ V.interUpTo X2 j := by
  intro j
  induction j with
  | zero =>
    rw [Nat.add_zero, V.interUpTo_appendSeq_left X1 n1 X2 (le_refl n1), interUpTo_zero
    ]
    exact (Set.inter_eq_left.mpr (V.interUpTo_subset_master X1 n1)).symm
  | succ j ih =>
    rw [Nat.add_succ, interUpTo_succ, ih]
    have happ : appendSeq X1 n1 X2 (n1 + j) = X2 j := by
      simp only [appendSeq, ite_eq_right (by omega : ¬ n1 + j < n1)]
      congr 1
      omega
    rw [happ, interUpTo_succ, Set.inter_assoc]

end NeighborhoodSystem

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

def leastFilter (C : Set (Set α)) (hCsub : ∀ X ∈ C, V.mem X)
```

```
    (hC : V.FinitelyConsistent C) : V.Element where
  mem Y := V.mem Y ∧ ∃ (n : ℕ) (X : ℕ → Set α), (∀ i, i < n → X i ∈ C) ∧ V.interUpTo
     X n ⊆ Y
  sub h := h.1
  master_mem :=
    ⟨V.master_mem, 0, (fun _ => V.master), (fun i hi => absurd hi (Nat.not_lt_zero i)),
      V.interUpTo_subset_master _ 0⟩
  inter_mem := by
    rintro X Y ⟨hXmem, n1, X1, hX1C, hX1sub⟩ ⟨hYmem, n2, X2, hX2C, hX2sub⟩
    have hmemC : ∀ i, i < n1 + n2 → appendSeq X1 n1 X2 i ∈ C := appendSeq_mem hX1C
    hX2C
    have hintermem : V.mem (V.interUpTo (appendSeq X1 n1 X2) (n1 + n2)) :=
      (V.consistent_iff_interUpTo_mem _ (fun i hi => hCsub _ (hmemC i hi))).mp
        (hC _ _ hmemC)
    have hsub : V.interUpTo (appendSeq X1 n1 X2) (n1 + n2) ⊆ X ∩ Y := by
      rw [V.interUpTo_appendSeq X1 n1 X2]
      exact Set.inter_subset_inter hX1sub hX2sub
    exact ⟨V.inter_mem hXmem hYmem hintermem hsub, n1 + n2, appendSeq X1 n1 X2, hmemC,
    hsub⟩
  up_mem := by
    rintro X Y ⟨_, n, Xs, hXC, hsub⟩ hY hXY
    exact ⟨hY, n, Xs, hXC, hsub.trans hXY⟩

end NeighborhoodSystem

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

def sInf (F : Set V.Element) (hF : F.Nonempty) : V.Element where
  mem X := ∀ x ∈ F, x.mem X
  sub h := hF.elim (fun x hx => x.sub (h x hx))
  master_mem := fun x _ => x.master_mem
  inter_mem h1 h2 := fun x hx => x.inter_mem (h1 x hx) (h2 x hx)
  up_mem h hY hXY := fun x hx => x.up_mem (h x hx) hY hXY

end NeighborhoodSystem

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems
```

```
def triSys : NeighborhoodSystem (Fin 3) :=
  NeighborhoodSystem.ofPositive (fun X => X.Nonempty) Set.univ
    (⟨0, Set.mem_univ 0⟩) (⟨0, Set.mem_univ 0⟩)
    (fun {_} _ => Set.subset_univ _) (fun _ _ _ _ => Iff.rfl)

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace triSys

def triple : ℕ → Set (Fin 3) := fun i => if i = 0 then A else if i = 1 then B else Cc

end triSys

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace triSys

theorem family_pairwise_nonempty :
    ∀ X ∈ family, ∀ Y ∈ family, (X ∩ Y).Nonempty := by
  intro X hX Y hY
  simp only [family, Set.mem_insert_iff, Set.mem_singleton_iff] at hX hY
  rcases hX with rfl | rfl | rfl <;> rcases hY with rfl | rfl | rfl
  · exact ⟨0, by simp [A, B, Cc]⟩
  · exact ⟨1, by simp [A, B, Cc]⟩
  · exact ⟨0, by simp [A, B, Cc]⟩
  · exact ⟨1, by simp [A, B, Cc]⟩
  · exact ⟨1, by simp [A, B, Cc]⟩
  · exact ⟨2, by simp [A, B, Cc]⟩
  · exact ⟨0, by simp [A, B, Cc]⟩
  · exact ⟨2, by simp [A, B, Cc]⟩
  · exact ⟨0, by simp [A, B, Cc]⟩

end triSys
end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems
```

```
namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

theorem le_sInf (F : Set V.Element) (hF : F.Nonempty) (y : V.Element) (h : ∀ x ∈ F, y
    ≤ x) :
    y ≤ V.sInf F hF :=
  fun _ hX x hx => h x hx _ hX

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

theorem leastFilter_le (C : Set (Set α)) (hCsub : ∀ X ∈ C, V.mem X)
    (hC : V.FinitelyConsistent C) (z : V.Element) (hz : ∀ W ∈ C, z.mem W) :
    V.leastFilter C hCsub hC ≤ z := by
  rintro Y ⟨hYmem, n, X, hXC, hsub⟩
  exact z.up_mem (z.mem_interUpTo X (fun i hi => hz (X i) (hXC i hi))) hYmem hsub

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

theorem sInf_le (F : Set V.Element) (hF : F.Nonempty) {x : V.Element} (hx : x ∈ F) :
    V.sInf F hF ≤ x :=
  fun _ h => h x hx

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems
```

```
namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

theorem subset_leastFilter (C : Set (Set α)) (hCsub : ∀ X ∈ C, V.mem X)
    (hC : V.FinitelyConsistent C) {W : Set α} (hW : W ∈ C) :
    (V.leastFilter C hCsub hC).mem W := by
  refine ⟨hCsub W hW, 1, (fun _ => W), (fun _ _ => hW), ?_⟩
  rw [interUpTo_succ, interUpTo_zero]
  exact Set.inter_subset_right

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

theorem triSys_master : triSys.master = (Set.univ : Set (Fin 3)) := rfl

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false


namespace DomainTheory.NeighbourhoodSystems

namespace triSys

theorem triple_interUpTo_empty : triSys.interUpTo triple 3 = (∅ : Set (Fin 3)) := by
  simp only [NeighborhoodSystem.interUpTo_succ, NeighborhoodSystem.interUpTo_zero,
    triSys_master]
  ext x
  fin_cases x <;> simp [triple, A, B, Cc]

end triSys
end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace triSys

theorem triple_mem : ∀ i, i < 3 → triple i ∈ family := by
  intro i hi
```

```
  simp only [family, Set.mem_insert_iff, Set.mem_singleton_iff]
  interval_cases i
  · exact Or.inl rfl
  · exact Or.inr (Or.inl rfl)
  · exact Or.inr (Or.inr rfl)

end triSys
end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems

namespace triSys

theorem not_finitelyConsistent : ¬ triSys.FinitelyConsistent family := by
  intro h
  obtain ⟨Z, hZmem, hZsub⟩ := h 3 triple triple_mem
  have hZne : Z.Nonempty := hZmem
  rw [triple_interUpTo_empty, Set.subset_empty_iff] at hZsub
  rw [hZsub] at hZne
  exact Set.not_nonempty_empty hZne

end triSys
end DomainTheory.NeighbourhoodSystems
end

section

namespace DomainTheory.NeighbourhoodSystems

set_option linter.unusedVariables false

theorem example_118.{u_1} : And
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) (C :
    Set (Set α))
    (hCsub :
      ∀ (X : Set α),
        @Membership.mem (Set α) (Set (Set α)) (@Set.instMembership (Set α)) C X →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X)
    (hC : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.FinitelyConsistent α V
    C)
    (z : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
    (∀ (W : Set α),
        @Membership.mem (Set α) (Set (Set α)) (@Set.instMembership (Set α)) C W →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem α V z W) →
      @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
    α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
```

```
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.leastFilter α V C hCsub
    hC) z)
  (Not
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.FinitelyConsistent
      (Fin (@OfNat.ofNat Nat (nat_lit 3) (instOfNatNat (nat_lit 3)))) DomainTheory.
   NeighbourhoodSystems.triSys
     DomainTheory.NeighbourhoodSystems.triSys.family)) :=
 @And.intro
 (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) (C :
   Set (Set α))
    (hCsub :
      ∀ (X : Set α),
        @Membership.mem (Set α) (Set (Set α)) (@Set.instMembership (Set α)) C X →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X)
    (hC : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.FinitelyConsistent α V
    C)
    (z : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
    (∀ (W : Set α),
        @Membership.mem (Set α) (Set (Set α)) (@Set.instMembership (Set α)) C W →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem α V z W) →
      @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
    α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
   NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
   instPartialOrderElement α V)))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.leastFilter α V C hCsub
    hC) z)
 (Not
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.FinitelyConsistent
      (Fin (@OfNat.ofNat Nat (nat_lit 3) (instOfNatNat (nat_lit 3)))) DomainTheory.
   NeighbourhoodSystems.triSys
     DomainTheory.NeighbourhoodSystems.triSys.family))
 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.leastFilter_le)
 DomainTheory.NeighbourhoodSystems.triSys.not_finitelyConsistent

end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 1.18. Let $\mathcal{D}$ be a neighbourhood system. Call a subset $C \subseteq \mathcal{D}$ *consistent* iff every finite subset of C is consistent in $\mathcal{D}$. Give an example where C is a subset with more than two elements, every pair of neighbourhoods in C is consistent, but C is *not* consistent. Show that if C is consistent, then there is a *least* filter $x \in |\mathcal{D}|$ with $C \subseteq x$. Show generally that the *intersection* of any non-empty collection of filters is again a filter.

3.2.26 Exercise 1.19 — positive neighbourhood systems

Define a *positive neighbourhood system* to be a family $\mathcal{D}$ where (ii) of 1.1 is replaced by **(ii')** whenever $X, Y \in \mathcal{D}$, then $X \cap Y \neq \emptyset$ iff $X \cap Y \in \mathcal{D}$. Prove that a positive neighbourhood system is indeed a neighbourhood system in the sense of the earlier definition. Give an example of a neighbourhood system that is *not* positive. (Hint: (suggested by C.A.R. Hoare). Let $\Delta = \mathbf{N} \times \mathbf{N}$, in the plane. Let $\mathcal{D}$ be the family of subsets $X \subseteq \mathbf{N} \times \mathbf{N}$ where all but a finite number of places the *vertical* sections of X are the whole of $\mathbf{N}$ but at the other places the sections are finite and nonempty. Smaller examples are of course possible.)

Exercise_1_19.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.Element

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems

def NeighborhoodSystem.IsPositive {α : Type*} (V : NeighborhoodSystem α) : Prop :=
  ∀ {{X Y : Set α}}, V.mem X → V.mem Y → (V.mem (X ∩ Y) ↔ (X ∩ Y).Nonempty)

def NeighborhoodSystem.DiffClosed {α : Type*} (D : NeighborhoodSystem α) : Prop :=
  ∀ {X Y : Set α}, D.mem X → D.mem Y → X \ Y = ∅ ∨ D.mem (X \ Y)

def NeighborhoodSystem.NoMinimal {α : Type*} (D : NeighborhoodSystem α) : Prop :=
  ∀ {X : Set α}, D.mem X →
    ∃ Y Z : Set α, D.mem Y ∧ D.mem Z ∧ Y.Nonempty ∧ Z.Nonempty ∧ Y ∩ Z = ∅ ∧ Y ∪ Z = X

def NestedOrDisjoint {α : Type*} (mem : Set α → Prop) : Prop :=
  ∀ {{X Y : Set α}}, mem X → mem Y → X ⊆ Y ∨ Y ⊆ X ∨ X ∩ Y = ∅

def NeighborhoodSystem.ofPositive {α : Type*} (mem : Set α → Prop) (master : Set α)
    (master_nonempty : master.Nonempty) (master_mem : mem master)
    (sub_master : ∀ {X : Set α}, mem X → X ⊆ master)
    (pos : ∀ {{X Y : Set α}}, mem X → mem Y → (mem (X ∩ Y) ↔ (X ∩ Y).Nonempty)) :
    NeighborhoodSystem α where
  mem
  master
  master_nonempty
  master_mem
  sub_master
  inter_mem := by
    intro X Y Z hX hY hZ hZsub
    have hZZ : mem (Z ∩ Z) := by rwa [Set.inter_self]
    have hZne : (Z ∩ Z).Nonempty := (pos hZ hZ).mp hZZ
    rw [Set.inter_self] at hZne
    exact (pos hX hY).mpr (hZne.mono hZsub)

end DomainTheory.NeighbourhoodSystems
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems

abbrev Tok := Fin 3

end DomainTheory.NeighbourhoodSystems.Exercise119
end
```

```
section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems

def a : Set Tok := {0, 1}

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems

def b : Set Tok := {1, 2}

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems

def master : Set Tok := Set.univ

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems

def memSet : Set (Set Tok) := {master, a, b}

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false
```

```
namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems

def mem (X : Set Tok) : Prop := X ∈ memSet

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems

theorem mem_iff (X : Set Tok) : mem X ↔ X = master ∨ X = a ∨ X = b := by
  simp only [mem, memSet, Set.mem_insert_iff, Set.mem_singleton_iff]

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems

theorem inter_eq (X Y : Set Tok) (hX : mem X) (hY : mem Y) :
    X ∩ Y = master ∨ X ∩ Y = a ∨ X ∩ Y = b ∨ X ∩ Y = ({1} : Set Tok) := by
  rcases (mem_iff X).mp hX with rfl | rfl | rfl
  · rcases (mem_iff Y).mp hY with rfl | rfl | rfl
    · exact Or.inl (by ext x; fin_cases x <;> simp [master, a, b])
    · exact Or.inr (Or.inl (by ext x; fin_cases x <;> simp [master, a, b]))
    · exact Or.inr (Or.inr (Or.inl (by ext x; fin_cases x <;> simp [master, a, b])))
  · rcases (mem_iff Y).mp hY with rfl | rfl | rfl
    · exact Or.inr (Or.inl (by ext x; fin_cases x <;> simp [master, a, b]))
    · exact Or.inr (Or.inl (by ext x; fin_cases x <;> simp [master, a, b]))
    · exact Or.inr (Or.inr (Or.inr (by ext x; fin_cases x <;> simp [master, a, b])))
  · rcases (mem_iff Y).mp hY with rfl | rfl | rfl
    · exact Or.inr (Or.inr (Or.inl (by ext x; fin_cases x <;> simp [master, a, b])))
    · exact Or.inr (Or.inr (Or.inr (by ext x; fin_cases x <;> simp [master, a, b])))
    · exact Or.inr (Or.inr (Or.inl (by ext x; fin_cases x <;> simp [master, a, b])))

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119
```

```
open DomainTheory.NeighbourhoodSystems

theorem mem_a : mem a := (mem_iff _).mpr (Or.inr (Or.inl rfl))

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems

theorem mem_b : mem b := (mem_iff _).mpr (Or.inr (Or.inr rfl))

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems

theorem mem_master : mem master := (mem_iff _).mpr (Or.inl rfl)

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems

theorem not_mem_sub_one {Z : Set Tok} (hZ : mem Z) (hsub : Z ⊆ ({1} : Set Tok)) :
    False := by
  rcases (mem_iff Z).mp hZ with rfl | rfl | rfl
  · exact absurd (hsub (show (0 : Tok) ∈ master by simp [master])) (by simp)
  · exact absurd (hsub (show (0 : Tok) ∈ a by simp [a])) (by simp)
  · exact absurd (hsub (show (2 : Tok) ∈ b by simp [b])) (by simp)

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false
```

```
namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems

def notPositiveSystem : NeighborhoodSystem Tok where
  mem
  master
  master_nonempty := Set.univ_nonempty
  master_mem := mem_master
  sub_master := fun _ => Set.subset_univ _
  inter_mem := by
    intro X Y Z hX hY hZ hZsub
    rcases inter_eq X Y hX hY with h | h | h | h
    · rw [h]; exact mem_master
    · rw [h]; exact mem_a
    · rw [h]; exact mem_b
    · rw [h] at hZsub; exact (not_mem_sub_one hZ hZsub).elim

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems

def positiveExample : NeighborhoodSystem (Fin 2) :=
  NeighborhoodSystem.ofPositive (fun X => X.Nonempty) Set.univ
    (by exact ⟨(0 : Fin 2), Set.mem_univ 0⟩)
    (by exact ⟨(0 : Fin 2), Set.mem_univ 0⟩) (by intro X _; exact Set.subset_univ X)
    (by intro X Y _ _; exact Iff.rfl)

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems

theorem a_inter_b : a ∩ b = ({1} : Set Tok) := by ext x; fin_cases x <;> simp [a, b]

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119
```

```
open DomainTheory.NeighbourhoodSystems

theorem one_not_mem : ¬ mem ({1} : Set Tok) := by
  intro h
  rcases (mem_iff _).mp h with h | h | h
  · have h0 : (0 : Tok) ∈ master := by simp [master]
    rw [← h] at h0; simp at h0
  · have h0 : (0 : Tok) ∈ a := by simp [a]
    rw [← h] at h0; simp at h0
  · have h2 : (2 : Tok) ∈ b := by simp [b]
    rw [← h] at h2; simp at h2

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems

theorem not_isPositive : ¬ notPositiveSystem.IsPositive := by
  intro h
  have hab := h (X := a) (Y := b) mem_a mem_b
  rw [a_inter_b] at hab
  exact one_not_mem (hab.mpr ⟨1, rfl⟩)

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

namespace DomainTheory.NeighbourhoodSystems.Exercise119

set_option linter.unusedVariables false

theorem example_119 : Not
  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsPositive DomainTheory.
    NeighbourhoodSystems.Exercise119.Tok
    DomainTheory.NeighbourhoodSystems.Exercise119.notPositiveSystem) :=
  DomainTheory.NeighbourhoodSystems.Exercise119.not_isPositive

end DomainTheory.NeighbourhoodSystems.Exercise119
end

section

set_option linter.unusedSimpArgs false

namespace DomainTheory.NeighbourhoodSystems.Exercise119

open DomainTheory.NeighbourhoodSystems
```

```
theorem positiveExample_isPositive : positiveExample.IsPositive := by
  intro X Y _ _
  exact Iff.rfl

end DomainTheory.NeighbourhoodSystems.Exercise119
end
```

principal.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_4

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

def principal {X : Set α} (hX : V.mem X) : V.Element where
  mem Y := V.mem Y ∧ X ⊆ Y
  sub h := h.1
  master_mem := ⟨V.master_mem, V.sub_master hX⟩
  inter_mem h1 h2 :=
    ⟨V.inter_mem h1.1 h2.1 hX (Set.subset_inter h1.2 h2.2), Set.subset_inter h1.2 h2.2⟩
  up_mem h hY hsub := ⟨hY, h.2.trans hsub⟩

@[simp] theorem mem_principal {X Y : Set α} (hX : V.mem X) :
    (V.principal hX).mem Y ↔ V.mem Y ∧ X ⊆ Y := Iff.rfl
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
end
```

bot.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.principal

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

def bot : V.Element := V.principal V.master_mem
```

```
@[simp] theorem mem_bot {Y : Set α} : V.bot.mem Y ↔ Y = V.master := by
  constructor
  · rintro ⟨hY, hΔY⟩
    exact Set.Subset.antisymm (V.sub_master hY) hΔY
  · rintro rfl
    exact ⟨V.master_mem, subset_rfl⟩
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
end
```

DomainIso.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.bot

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems

abbrev DomainIso {α β : Type*} (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    : Type _ :=
  V₀.Element ≃o V₁.Element

namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

def IsTotal (x : V.Element) : Prop := ∀ y, x ≤ y → y ≤ x
end

end NeighborhoodSystem

def Isomorphic {α β : Type*} (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    Prop :=
  Nonempty (DomainIso V₀ V₁)

@[inherit_doc] infix:25 " ≅? " => Isomorphic

theorem Isomorphic.refl {α : Type*} (V : NeighborhoodSystem α) : V ≅? V :=
  ⟨OrderIso.refl _⟩

theorem Isomorphic.symm {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ :
    NeighborhoodSystem β}
    (h : V₀ ≅? V₁) : V₁ ≅? V₀ :=
  h.elim fun e => ⟨e.symm⟩

theorem Isomorphic.trans {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ :
    NeighborhoodSystem β}
    {V₂ : NeighborhoodSystem ?} (h₀ : V₀ ≅? V₁) (h₁ : V₁ ≅? V₂) : V₀ ≅? V₂ :=
```

```
  h₀.elim fun e₀ => h₁.elim fun e₁ => ⟨e₀.trans e₁⟩

end DomainTheory.NeighbourhoodSystems
end
```

3.2.27 Exercise 1.20 — upward closed neighbourhoods

Let $\mathcal{D}$ be any neighbourhood system over a set Δ. Let $\Delta' = \mathcal{D}$ and define

$$\mathcal{D}' = \{\uparrow X \mid X \in \mathcal{D}\},$$

where

$$\uparrow X = \{Y \in \mathcal{D} \mid Y \subseteq X\}.$$

Show that $\mathcal{D}'$ is a positive neighbourhood system and that $|\mathcal{D}|$ and $|\mathcal{D}'|$ are isomorphic. Note that for $\mathcal{D}'$ finite elements and tokens are in a one-one correspondence.

Exercise_1_20.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.DomainIso
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.principal
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_19
public import Mathlib.Topology.Defs.Basic
public import Mathlib.Algebra.Group.End

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

def upSet (X : Set α) : Set (Set α) := {Y | V.mem Y ∧ Y ⊆ X}

@[simp] theorem mem_upSet {X Y : Set α} : Y ∈ V.upSet X ↔ V.mem Y ∧ Y ⊆ X := Iff.rfl

theorem upSet_inter (X Y : Set α) : V.upSet X ∩ V.upSet Y = V.upSet (X ∩ Y) := by
  ext Z
  simp only [Set.mem_inter_iff, mem_upSet, Set.subset_inter_iff]
  tauto

theorem upSet_subset_iff {X Y : Set α} (hX : V.mem X) : V.upSet X ⊆ V.upSet Y ↔ X ⊆ Y
     := by
  constructor
  · intro h
    exact (h ⟨hX, subset_rfl⟩).2
  · intro hXY Z hZ
    exact ⟨hZ.1, hZ.2.trans hXY⟩
```

```
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
end

section
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

def powerSystem : NeighborhoodSystem (Set α) where
  mem S := ∃ X, V.mem X ∧ S = V.upSet X
  master := V.upSet V.master
  master_nonempty := ⟨V.master, V.master_mem, subset_rfl⟩
  master_mem := ⟨V.master, V.master_mem, rfl⟩
  inter_mem := by
    rintro S T W ⟨X, hX, rfl⟩ ⟨Y, hY, rfl⟩ ⟨Z, hZ, rfl⟩ hWsub
    have hZin : Z ∈ V.upSet X ∩ V.upSet Y := hWsub ⟨hZ, subset_rfl⟩
    obtain ⟨⟨_, hZX⟩, _, hZY⟩ := hZin
    have hXY : V.mem (X ∩ Y) := V.inter_mem hX hY hZ (Set.subset_inter hZX hZY)
    exact ⟨X ∩ Y, hXY, V.upSet_inter X Y⟩
  sub_master := by
    intro S hS
    obtain ⟨X, hX, rfl⟩ := hS
    exact (V.upSet_subset_iff hX).mpr (V.sub_master hX)

@[simp] theorem powerSystem_mem {S : Set (Set α)} :
    V.powerSystem.mem S ↔ ∃ X, V.mem X ∧ S = V.upSet X := Iff.rfl

def ofPower (y : V.powerSystem.Element) : V.Element where
  mem W := V.mem W ∧ y.mem (V.upSet W)
  sub h := h.1
  master_mem := ⟨V.master_mem, y.master_mem⟩
  inter_mem := by
    rintro X Y ⟨hX, hyX⟩ ⟨hY, hyY⟩
    have hyInter : y.mem (V.upSet X ∩ V.upSet Y) := y.inter_mem hyX hyY
    rw [V.upSet_inter] at hyInter
    obtain ⟨W, hW, hWeq⟩ := y.sub hyInter
    have hWin : W ∈ V.upSet (X ∩ Y) := by rw [hWeq]; exact ⟨hW, subset_rfl⟩
    exact ⟨V.inter_mem hX hY hW hWin.2, hyInter⟩
  up_mem := by
    rintro X Y ⟨hX, hyX⟩ hY hXY
    exact ⟨hY, y.up_mem hyX ⟨Y, hY, rfl⟩ ((V.upSet_subset_iff hX).mpr hXY)⟩

def toPower (x : V.Element) : V.powerSystem.Element where
  mem S := ∃ W, x.mem W ∧ S = V.upSet W
  sub := by rintro S ⟨W, hW, rfl⟩; exact ⟨W, x.sub hW, rfl⟩
  master_mem := ⟨V.master, x.master_mem, rfl⟩
  inter_mem := by
    rintro S T ⟨W1, hW1, rfl⟩ ⟨W2, hW2, rfl⟩
    exact ⟨W1 ∩ W2, x.inter_mem hW1 hW2, V.upSet_inter W1 W2⟩
  up_mem := by
    rintro S T ⟨W, hW, rfl⟩ hT hsub
```

```
    obtain ⟨W', hW', rfl⟩ := hT
    exact ⟨W', x.up_mem hW hW' ((V.upSet_subset_iff (x.sub hW)).mp hsub), rfl⟩

theorem upSet_injective {X Y : Set α} (hX : V.mem X) (hY : V.mem Y)
    (h : V.upSet X = V.upSet Y) : X = Y :=
  Set.Subset.antisymm ((V.upSet_subset_iff hX).mp h.subset)
    ((V.upSet_subset_iff hY).mp h.superset)

def powerIso : V.Element ≃o V.powerSystem.Element where
  toFun := V.toPower
  invFun := V.ofPower
  left_inv := by
    intro x
    apply Element.ext
    intro W
    constructor
    · rintro ⟨hW, W', hW', heq⟩
      rw [V.upSet_injective hW (x.sub hW') heq]; exact hW'
    · intro hx
      exact ⟨x.sub hx, W, hx, rfl⟩
  right_inv := by
    intro y
    apply Element.ext
    intro S
    constructor
    · rintro ⟨W, ⟨_, hyW⟩, rfl⟩
      exact hyW
    · intro hyS
      obtain ⟨W, hW, rfl⟩ := y.sub hyS
      exact ⟨W, ⟨hW, hyS⟩, rfl⟩
  map_rel_iff' := by
    intro x x'
    constructor
    · intro h W hx
      have hmem : (V.toPower x).mem (V.upSet W) := ⟨W, hx, rfl⟩
      obtain ⟨W', hW', heq⟩ := h (V.upSet W) hmem
      rw [V.upSet_injective (x.sub hx) (x'.sub hW') heq]; exact hW'
    · intro h S hS
      obtain ⟨W, hW, rfl⟩ := hS
      exact ⟨W, h W hW, rfl⟩

theorem isomorphic_powerSystem : V ≅? V.powerSystem := ⟨V.powerIso⟩

theorem powerSystem_isPositive : V.powerSystem.IsPositive := by
  rintro S T ⟨X, hX, rfl⟩ ⟨Y, hY, rfl⟩
  rw [V.upSet_inter]
  constructor
  · rintro ⟨W, hW, hWeq⟩
    rw [hWeq]
    exact ⟨W, hW, subset_rfl⟩
  · rintro ⟨Z, hZmem, hZsub⟩
    exact ⟨X ∩ Y, V.inter_mem hX hY hZmem hZsub, rfl⟩

theorem toPower_principal {X : Set α} (hX : V.mem X) :
    V.toPower (V.principal hX) = V.powerSystem.principal ⟨X, hX, rfl⟩ := by
  apply Element.ext
```

```
  intro S
  constructor
  · rintro ⟨W, ⟨hWmem, hXW⟩, rfl⟩
    exact ⟨⟨W, hWmem, rfl⟩, (V.upSet_subset_iff hX).mpr hXW⟩
  · rintro ⟨⟨W, hWmem, rfl⟩, hsub⟩
    exact ⟨W, ⟨hWmem, (V.upSet_subset_iff hX).mp hsub⟩, rfl⟩
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
section

set_option linter.unusedVariables false

theorem example_120.{u_1} : And
  (And
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
      @DomainTheory.NeighbourhoodSystems.Isomorphic α (Set α) V
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.powerSystem α V))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsPositive (Set α)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.powerSystem α V)))
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {X :
    Set α}
    (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.powerSystem α V))
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.toPower α V
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X hX))
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal (Set α)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.powerSystem α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V X)
        (@Exists.intro (Set α)
          (fun (X_1 : Set α) =>
            And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X_1)
              (@Eq (Set (Set α)) (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.upSet α V X)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V X_1))
    )
          X
          (@And.intro (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X
    )
            (@Eq (Set (Set α)) (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    upSet α V X)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V X))
            hX (@rfl (Set (Set α)) (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.upSet α V X))))))) :=
  @And.intro
  (And
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
      @DomainTheory.NeighbourhoodSystems.Isomorphic α (Set α) V
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.powerSystem α V))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsPositive (Set α)
```

```
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.powerSystem α V)))
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {X :
    Set α}
    (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.powerSystem α V))
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.toPower α V
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X hX))
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal (Set α)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.powerSystem α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V X)
        (@Exists.intro (Set α)
          (fun (X_1 : Set α) =>
            And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X_1)
              (@Eq (Set (Set α)) (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.upSet α V X)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V X_1))
    )
          X
          (@And.intro (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X
    )
            (@Eq (Set (Set α)) (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    upSet α V X)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V X))
            hX (@rfl (Set (Set α)) (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.upSet α V X))))))
  (@And.intro
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
      @DomainTheory.NeighbourhoodSystems.Isomorphic α (Set α) V
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.powerSystem α V))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsPositive (Set α)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.powerSystem α V))
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.isomorphic_powerSystem
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.powerSystem_isPositive)
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.toPower_principal
end

end DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

def basicOpen (X : Set α) : Set V.Element := {x | x.mem X}

@[simp] theorem mem_basicOpen {X : Set α} {x : V.Element} :
    x ∈ V.basicOpen X ↔ x.mem X := Iff.rfl

class OpenFilter (U : Set V.Element) : Prop where
  out : ∀ x ∈ U, ∃ X, x.mem X ∧ V.basicOpen X ⊆ U

theorem basicOpen_inter_subset_left {X Y : Set α} (hX : V.mem X) :
    V.basicOpen (X ∩ Y) ⊆ V.basicOpen X :=
```

```
  fun z hz => z.up_mem hz hX Set.inter_subset_left

theorem basicOpen_inter_subset_right {X Y : Set α} (hY : V.mem Y) :
    V.basicOpen (X ∩ Y) ⊆ V.basicOpen Y :=
  fun z hz => z.up_mem hz hY Set.inter_subset_right

instance instTopologicalSpaceElement : TopologicalSpace V.Element where
  IsOpen := V.OpenFilter
  isOpen_univ := ⟨fun x _ => ⟨V.master, x.master_mem, Set.subset_univ _⟩⟩
  isOpen_inter := by
    intro U W hU hW
    constructor
    intro x hx
    obtain ⟨hxU, hxW⟩ := hx
    obtain ⟨X, hX, hXU⟩ := hU.out x hxU
    obtain ⟨Y, hY, hYW⟩ := hW.out x hxW
    refine ⟨X ∩ Y, x.inter_mem hX hY, fun z hz => ⟨hXU ?_, hYW ?_⟩⟩
    · exact V.basicOpen_inter_subset_left (x.sub hX) hz
    · exact V.basicOpen_inter_subset_right (x.sub hY) hz
  isOpen_sUnion := by
    intro S hS
    constructor
    intro x hx
    obtain ⟨t, htS, hxt⟩ := hx
    obtain ⟨X, hX, hXt⟩ := (hS t htS).out x hxt
    exact ⟨X, hX, hXt.trans fun _ ha => ⟨t, htS, ha⟩⟩
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
end
```

3.2.28 Exercise 1.21 — complete neighbourhood systems

Exercise_1_21.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Theorem_1_10
import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.Factoid_1_5

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

theorem consistent_iff_bracket_interUpTo_nonempty (X : ℕ → Set α) {n : ℕ}
    (hX : ∀ i, i < n → V.mem (X i)) :
    V.Consistent X n ↔ (V.bracket (V.interUpTo X n)).Nonempty := by
```

```
  rw [V.consistent_iff_interUpTo_mem X hX]
  exact V.bracket_nonempty_iff.symm

theorem consistent_iff_iInter_bracket_nonempty (X : ℕ → Set α) {n : ℕ}
    (hX : ∀ i, i < n → V.mem (X i)) :
    V.Consistent X n ↔ ∃ x : V.Element, ∀ i, i < n → x ∈ V.bracket (X i) := by
  rw [V.consistent_iff_bracket_interUpTo_nonempty X hX]
  constructor
  · rintro ⟨x, hx⟩
    exact ⟨x, fun i hi => x.up_mem hx (hX i hi) (V.interUpTo_subset X hi)⟩
  · rintro ⟨x, hx⟩
    exact ⟨x, x.mem_interUpTo X (fun i hi => hx i hi)⟩

theorem tokenSystem_complete : V.tokenSystem.IsComplete := by
  intro y
  refine ⟨V.ofToken y, ?_, ?_⟩
  · rintro S ⟨W, hW, rfl⟩
    constructor
    · intro hyW; exact ⟨hW, hyW⟩
    · rintro ⟨_, hyW⟩; exact hyW
  · intro b hb
    apply Element.ext
    intro W
    by_cases hW : V.mem W
    · have hb' := hb (V.bracket W) ⟨W, hW, rfl⟩
      constructor
      · intro hbW; exact ⟨hW, hb'.mpr hbW⟩
      · intro hxW; exact hb'.mp hxW.2
    · constructor
      · intro hbW; exact absurd (b.sub hbW) hW
      · intro hxW; exact absurd ((V.ofToken y).sub hxW) hW

theorem tokenSystem_isPositive : V.tokenSystem.IsPositive := by
  rintro S T ⟨X, hX, rfl⟩ ⟨Y, hY, rfl⟩
  rw [V.bracket_inter hX hY]
  constructor
  · rintro ⟨W, hW, hWeq⟩
    rw [hWeq]
    exact ⟨V.principal hW, V.principal_mem_bracket hW⟩
  · rintro ⟨x, hx⟩
    exact ⟨X ∩ Y, x.sub hx, rfl⟩

theorem tokenSystem_toToken_bijective : Function.Bijective V.toToken :=
  V.tokenIso.bijective
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
section

set_option linter.unusedVariables false

theorem example_121.{u_1} : And
  (And
    (And
```

```
    (And
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
   (X : Nat → Set α) {n : Nat},
        (∀ (i : Nat),
            @LT.lt Nat instLTNat i n → @DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.mem α V (X i)) →
          Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Consistent α V
  X n)
            (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.interUpTo α V
   X n))))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
    (X : Nat → Set α) {n : Nat},
        (∀ (i : Nat),
            @LT.lt Nat instLTNat i n → @DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.mem α V (X i)) →
          Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Consistent α V
  X n)
            (∃ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
  V),
              ∀ (i : Nat),
                @LT.lt Nat instLTNat i n →
                  @Membership.mem (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
                    (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V))
                    (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V))
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α
    V (X i)) x)))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsComplete
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.tokenSystem α V)))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsPositive
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.tokenSystem α V)))
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
    @Function.Bijective (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     α V)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.tokenSystem α V))
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.toToken α V)) :=
@And.intro
(And
  (And
    (And
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
   (X : Nat → Set α) {n : Nat},
        (∀ (i : Nat),
            @LT.lt Nat instLTNat i n → @DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.mem α V (X i)) →
```

```
         Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Consistent α V
 X n)
           (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.interUpTo α V
  X n))))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
  (X : Nat → Set α) {n : Nat},
        (∀ (i : Nat),
           @LT.lt Nat instLTNat i n → @DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.mem α V (X i)) →
         Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Consistent α V
 X n)
           (∃ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
 V),
             ∀ (i : Nat),
               @LT.lt Nat instLTNat i n →
                 @Membership.mem (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
                   (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V))
                   (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V))
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α
  V (X i)) x)))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsComplete
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.tokenSystem α V)))
 (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
   @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsPositive
     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.tokenSystem α V)))
(∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
  @Function.Bijective (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   α V)
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.tokenSystem α V))
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.toToken α V))
(@And.intro
  (And
    (And
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
   (X : Nat → Set α) {n : Nat},
        (∀ (i : Nat),
           @LT.lt Nat instLTNat i n → @DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.mem α V (X i)) →
         Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Consistent α V
 X n)
           (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.interUpTo α V
  X n))))
```

```
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
 (X : Nat → Set α) {n : Nat},
      (∀ (i : Nat),
          @LT.lt Nat instLTNat i n → @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V (X i)) →
        Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Consistent α V
X n)
          (∃ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
V),
            ∀ (i : Nat),
              @LT.lt Nat instLTNat i n →
                @Membership.mem (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                  (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V))
                  (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V))
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α
 V (X i)) x)))
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsComplete
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.tokenSystem α V)))
(∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsPositive
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.tokenSystem α V))
(@And.intro
  (And
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
 (X : Nat → Set α) {n : Nat},
      (∀ (i : Nat),
          @LT.lt Nat instLTNat i n → @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V (X i)) →
        Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Consistent α V
X n)
          (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.interUpTo α V
 X n))))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
 (X : Nat → Set α) {n : Nat},
      (∀ (i : Nat),
          @LT.lt Nat instLTNat i n → @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V (X i)) →
        Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Consistent α V
X n)
          (∃ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
V),
            ∀ (i : Nat),
              @LT.lt Nat instLTNat i n →
                @Membership.mem (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                  (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V))
```

```
                    (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V))
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α
     V (X i)) x)))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsComplete
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.tokenSystem α V))
      (@And.intro
        (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
     (X : Nat → Set α) {n : Nat},
          (∀ (i : Nat),
              @LT.lt Nat instLTNat i n → @DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.mem α V (X i)) →
            Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Consistent α V
    X n)
              (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α V
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.interUpTo α V
     X n))))
        (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
     (X : Nat → Set α) {n : Nat},
          (∀ (i : Nat),
              @LT.lt Nat instLTNat i n → @DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.mem α V (X i)) →
            Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Consistent α V
    X n)
              (∃ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
    V),
                ∀ (i : Nat),
                  @LT.lt Nat instLTNat i n →
                    @Membership.mem (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
                    (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V))
                    (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V))
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bracket α
     V (X i)) x))
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    consistent_iff_bracket_interUpTo_nonempty
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    consistent_iff_iInter_bracket_nonempty)
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.tokenSystem_complete)
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.tokenSystem_isPositive)
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.tokenSystem_toToken_bijective
end

end DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
end
```

EXERCISE 1.21. Work out in greater detail the proof of 1.10. Remark that the neighbourhood system over $|\mathcal{D}|$ so constructed is positive, thereby obtaining in a different way the same kind of conclusion as in 1.20. Show also that the system over $|\mathcal{D}|$ is complete in the sense that every filter is fixed by a unique member

of the underlying set. (A filter is *fixed by a point* iff it is the filter of *all* neighbourhoods containing that point.) Remark that a complete system is one where tokens and (partial) elements can always be identified (under a suitable one-one correspondence). Show also that consistency of a set $\{X_i \mid i < n\}$ of neighbourhoods in $\mathcal{D}$ is equivalent to saying

$$\bigcap_{i<n} [X_i] \neq \emptyset.$$

3.2.29 Exercise 1.22 — topology of a domain

(For topologists). Show that the neighbourhoods $[X]$ for $X \in \mathcal{D}$ make $|\mathcal{D}|$ into a topological space where the open subsets $\mathcal{U} \subseteq |\mathcal{D}|$ can be characterized by the following two conditions:

(i) whenever $x \in \mathcal{U}$ and $x \sqsubseteq y \in |\mathcal{D}|$, then $y \in \mathcal{U}$; and

(ii) whenever $x \in \mathcal{U}$, then $[X] \in \mathcal{U}$ for some $X \in x$.

Prove also that the inclusion relation on $|\mathcal{D}|$ can be defined topologically as:

(iii) $x \sqsubseteq y$ iff for all open $\mathcal{U} \subseteq |\mathcal{D}|$, if $x \in \mathcal{U}$ then $y \in \mathcal{U}$.

Is $|D|$ ever a Hausdorff space?
Show that if $(x_n)_{n=0}^{\infty}$ is a sequence of elements of $|D|$ with $x_n \subseteq x_{n+1}$ for all n, then

$$\bigcup_{n=0}^{\infty} x_n$$

is not only in $|D|$ but is a topological limit point of the sequence. Show that any element x is a limit point of the set $\{\uparrow X \mid X \in x\}$. Are there other limit points?

Exercise_1_22.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_20
public import Mathlib.Topology.Defs.Filter

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

theorem isOpen_basicOpen (X : Set α) : IsOpen (V.basicOpen X) :=
  ⟨fun _ hx => ⟨X, hx, subset_rfl⟩⟩

theorem isOpen_iff_isOpenFilter (U : Set V.Element) : IsOpen U ↔ V.OpenFilter U :=
  ⟨fun h => h, fun h => h⟩
```

```
theorem isOpen_isUpperSet {U : Set V.Element} (hU : IsOpen U) :
    ∀ {{x y : V.Element}}, x ∈ U → x ≤ y → y ∈ U := by
  intro x y hxU hxy
  obtain ⟨X, hX, hXU⟩ := hU.out x hxU
  exact hXU (hxy X hX)

theorem isOpen_iff_upper_basic (U : Set V.Element) :
    IsOpen U ↔
      (∀ {{x y : V.Element}}, x ∈ U → x ≤ y → y ∈ U) ∧
        (∀ x ∈ U, ∃ X, x.mem X ∧ V.basicOpen X ⊆ U) := by
  constructor
  · intro hU
    exact ⟨V.isOpen_isUpperSet hU, hU.out⟩
  · rintro ⟨_, h2⟩
    exact ⟨h2⟩

theorem le_iff_isOpen_imp (x y : V.Element) :
    x ≤ y ↔ ∀ U : Set V.Element, IsOpen U → x ∈ U → y ∈ U := by
  constructor
  · intro hxy U hU hxU
    exact V.isOpen_isUpperSet hU hxU hxy
  · intro h
    exact fun X hX => h (V.basicOpen X) (V.isOpen_basicOpen X) hX

example :
    (∀ {U : Set V.Element}, IsOpen U → ∀ {{x y : V.Element}}, x ∈ U → x ≤ y → y ∈ U)
    ∧
      (∀ X : Set α, IsOpen (V.basicOpen X)) ∧
      (∀ U : Set V.Element,
        IsOpen U ↔
          (∀ {{x y : V.Element}}, x ∈ U → x ≤ y → y ∈ U) ∧
            (∀ x ∈ U, ∃ X, x.mem X ∧ V.basicOpen X ⊆ U)) ∧
      (∀ x y : V.Element, x ≤ y ↔ ∀ U : Set V.Element, IsOpen U → x ∈ U → y ∈ U) :=
  ⟨V.isOpen_isUpperSet, V.isOpen_basicOpen, V.isOpen_iff_upper_basic, V.
    le_iff_isOpen_imp⟩

theorem specializes_iff_le (x y : V.Element) : y  ~>  x ↔ x ≤ y := by
  rw [specializes_iff_forall_open]
  exact (V.le_iff_isOpen_imp x y).symm
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
end
```

3.2.30 Exercise 1.23 — decidable total elements

Suppose that the neighbourhood system D is countable, say,

$$D = \{X_0, X_1, X_2, \ldots, X_n, \ldots\}.$$

Suppose further that the property of consistency of finite sequences of neighbourhoods is decidable (or "effectively known"). Then the following sequence is well defined:

$$
\begin{aligned}
Y_0 &= X_0 \\
Y_{n+1} &= X_{n+1}, \text{ if this set is consistent with } Y_0, Y_1, \ldots, Y_n; \\
&= Y_n, \text{ if not.}
\end{aligned}
$$

Show that $\{Y_0, Y_1, \ldots, Y_n, \ldots\}$ is a total element of $|D|$. (Hint: Show first that $Y_0, Y_1, \ldots, Y_{n-1}$ is consistent for all n.) In such a system show that all filters can be determined by sequences.

Exercise_1_23.lean

```
module

import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.Exercise_1_13
import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.Factoid_1_5
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.DomainIso

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise123
section

open NeighborhoodSystem
variable {α : Type*} (V : NeighborhoodSystem α) (enum : ℕ → Set α) [DecidablePred V.
    mem]

def state : ℕ → Set α × Set α
  | 0 => (enum 0, V.master ∩ enum 0)
  | (n + 1) =>
      if V.mem ((state n).2 ∩ enum (n + 1)) then
        (enum (n + 1), (state n).2 ∩ enum (n + 1))
      else
        state n

def Y (n : ℕ) : Set α := (state V enum n).1

@[simp] theorem Y_zero : Y V enum 0 = enum 0 := rfl

def acc (n : ℕ) : Set α := (state V enum n).2

@[simp] theorem acc_zero : acc V enum 0 = V.master ∩ enum 0 := rfl

abbrev cond (n : ℕ) : Prop := V.mem (acc V enum n ∩ enum (n + 1))

theorem state_succ (n : ℕ) :
    state V enum (n + 1) =
      if cond V enum n then (enum (n + 1), acc V enum n ∩ enum (n + 1)) else state V
    enum n :=
  rfl

theorem Y_succ_neg {n : ℕ} (h : ¬ cond V enum n) : Y V enum (n + 1) = Y V enum n := by
  show (state V enum (n + 1)).1 = (state V enum n).1
  rw [state_succ, ite_eq_right h]

theorem Y_succ_pos {n : ℕ} (h : cond V enum n) : Y V enum (n + 1) = enum (n + 1) := by
  show (state V enum (n + 1)).1 = enum (n + 1)
  rw [state_succ, ite_eq_left h]
```

```
theorem acc_succ_neg {n : ℕ} (h : ¬ cond V enum n) :
    acc V enum (n + 1) = acc V enum n := by
  show (state V enum (n + 1)).2 = (state V enum n).2
  rw [state_succ, ite_eq_right h]

theorem acc_succ_pos {n : ℕ} (h : cond V enum n) :
    acc V enum (n + 1) = acc V enum n ∩ enum (n + 1) := by
  show (state V enum (n + 1)).2 = acc V enum n ∩ enum (n + 1)
  rw [state_succ, ite_eq_left h]

theorem acc_eq_interUpTo : ∀ n, acc V enum n = V.interUpTo (Y V enum) (n + 1) := by
  intro n
  induction n with
  | zero =>
    rw [acc_zero, interUpTo_succ, interUpTo_zero, Y_zero]
  | succ n ih =>
    rw [interUpTo_succ, ← ih]
    by_cases h : cond V enum n
    · rw [acc_succ_pos V enum h, Y_succ_pos V enum h]
    · rw [acc_succ_neg V enum h, Y_succ_neg V enum h]
      have hsub : acc V enum n ⊆ Y V enum n := by
        rw [ih]; exact V.interUpTo_subset (Y V enum) (Nat.lt_succ_self n)
      rw [Set.inter_eq_left.mpr hsub]

section
variable (henum : ∀ n, V.mem (enum n))

include henum

theorem acc_mem : ∀ n, V.mem (acc V enum n) := by
  intro n
  induction n with
  | zero =>
    rw [acc_zero, Set.inter_eq_right.mpr (V.sub_master (henum 0))]
    exact henum 0
  | succ n ih =>
    by_cases h : cond V enum n
    · rw [acc_succ_pos V enum h]; exact h
    · rw [acc_succ_neg V enum h]; exact ih

include henum

theorem mem_interUpTo_Y : ∀ n, V.mem (V.interUpTo (Y V enum) n) := by
  intro n
  cases n with
  | zero => rw [interUpTo_zero]; exact V.master_mem
  | succ n => rw [← acc_eq_interUpTo V enum]; exact acc_mem V enum henum n
end
end

end DomainTheory.NeighbourhoodSystems.Exercise123

section
namespace DomainTheory.NeighbourhoodSystems
namespace Exercise123
```

```
section

open NeighborhoodSystem
variable {α : Type*} (V : NeighborhoodSystem α) (enum : ℕ → Set α) [DecidablePred V.
    mem]
variable (henum : ∀ n, V.mem (enum n))

include henum

def greedyElement : V.Element where
  mem X := V.mem X ∧ ∃ n, V.interUpTo (Y V enum) n ⊆ X
  sub h := h.1
  master_mem := ⟨V.master_mem, 0, by rw [interUpTo_zero]⟩
  inter_mem := by
    rintro X X' ⟨hX, n, hn⟩ ⟨hX', m, hm⟩
    have hsub : V.interUpTo (Y V enum) (max n m) ⊆ X ∩ X' :=
      Set.subset_inter
        ((V.interUpTo_antitone (Y V enum) (le_max_left n m)).trans hn)
        ((V.interUpTo_antitone (Y V enum) (le_max_right n m)).trans hm)
    exact ⟨V.inter_mem hX hX' (mem_interUpTo_Y V enum henum (max n m)) hsub, max n m,
    hsub⟩
  up_mem := by
    rintro X X' ⟨_, n, hn⟩ hX' hsub
    exact ⟨hX', n, hn.trans hsub⟩
end

open NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α) (enum : ℕ → Set α) [DecidablePred V.
    mem]

variable (henum : ∀ n, V.mem (enum n))
include henum

theorem Y_mem : ∀ n, V.mem (Y V enum n) := by
  intro n
  induction n with
  | zero => rw [Y_zero]; exact henum 0
  | succ n ih =>
    by_cases h : cond V enum n
    · rw [Y_succ_pos V enum h]; exact henum (n + 1)
    · rw [Y_succ_neg V enum h]; exact ih

theorem Y_prefix_consistent (n : ℕ) : V.Consistent (Y V enum) n :=
  ⟨V.interUpTo (Y V enum) n, mem_interUpTo_Y V enum henum n, subset_rfl⟩

theorem greedyElement_mem_Y (n : ℕ) : (greedyElement V enum henum).mem (Y V enum n) :=
  ⟨Y_mem V enum henum n, n + 1, V.interUpTo_subset (Y V enum) (Nat.lt_succ_self n)⟩

theorem greedyElement_mem_acc (n : ℕ) : (greedyElement V enum henum).mem (acc V enum n
    ) := by
  refine ⟨acc_mem V enum henum n, n + 1, ?_⟩
  rw [acc_eq_interUpTo V enum]

variable (hsurj : ∀ {X : Set α}, V.mem X → ∃ n, enum n = X)
include hsurj
```

```
theorem greedyElement_isTotal : V.IsTotal (greedyElement V enum henum) := by
  intro z hz W hW
  obtain ⟨k, rfl⟩ := hsurj (z.sub hW)
  cases k with
  | zero =>
    have : Y V enum 0 = enum 0 := Y_zero V enum
    rw [← this]
    exact greedyElement_mem_Y V enum henum 0
  | succ m =>
    by_cases h : cond V enum m
    · have hYk : Y V enum (m + 1) = enum (m + 1) := Y_succ_pos V enum h
      rw [← hYk]
      exact greedyElement_mem_Y V enum henum (m + 1)
    · exfalso
      apply h
      have hacc_z : z.mem (acc V enum m) := hz _ (greedyElement_mem_acc V enum henum m
    )
      have : z.mem (acc V enum m ∩ enum (m + 1)) := z.inter_mem hacc_z hW
      exact z.sub this

omit [DecidablePred V.mem] in

theorem filters_sequence_determined (x : V.Element) :
    ∃ s : ℕ → Set α, (∀ n, V.mem (s n)) ∧ ∀ Z, x.mem Z ↔ (V.mem Z ∧ ∃ n, s n ⊆ Z) :=
     by
  classical
  refine ⟨fun i => if x.mem (enum i) then enum i else V.master, ?_, ?_⟩
  · intro n
    by_cases h : x.mem (enum n)
    · simp only [ite_eq_left h]; exact henum n
    · simp only [ite_eq_right h]; exact V.master_mem
  · intro Z
    constructor
    · intro hZ
      obtain ⟨k, hk⟩ := hsurj (x.sub hZ)
      have hxk : x.mem (enum k) := by rw [hk]; exact hZ
      refine ⟨x.sub hZ, k, ?_⟩
      show (if x.mem (enum k) then enum k else V.master) ⊆ Z
      rw [ite_eq_left hxk]; exact hk.subset
    · rintro ⟨hZmem, n, hn⟩
      have hsx : x.mem (if x.mem (enum n) then enum n else V.master) := by
        by_cases h : x.mem (enum n)
        · simp only [ite_eq_left h]; exact h
        · simp only [ite_eq_right h]; exact x.master_mem
      exact x.up_mem hsx hZmem hn

end Exercise123

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise123
section

set_option linter.unusedVariables false

theorem example_123.{u_1} : ∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
```

```
    NeighborhoodSystem α) (enum : Nat → Set α)
  [inst : @DecidablePred (Set α) (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.mem α V)],
  (∀ (n : Nat), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V (enum n)
    ) →
    ∀ (n : Nat),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Consistent α V
        (@DomainTheory.NeighbourhoodSystems.Exercise123.Y α V enum inst) n :=
  @DomainTheory.NeighbourhoodSystems.Exercise123.Y_prefix_consistent
end

end DomainTheory.NeighbourhoodSystems.Exercise123
end
```

3.2.31 Exercise 1.24 — extending partial elements

(For set theorists). Prove, using the Axiom of Choice, or some equivalent principle, that in every domain a partial element can always be extended to a total element. Is this assertion equivalent to the Axiom of Choice? (Hint: Remember to prove that the union of every (transfinite) chain of filters is again a filter.)

Exercise_1_24.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.DomainIso
public import Mathlib.Order.Preorder.Chain

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

def chainUnion (C : Set V.Element) (hne : C.Nonempty) (hchain : IsChain (· ≤ ·) C) : V.
    Element where
  mem X := ∃ x ∈ C, x.mem X
  sub := by rintro X ⟨x, _, hxX⟩; exact x.sub hxX
  master_mem := by obtain ⟨x, hxC⟩ := hne; exact ⟨x, hxC, x.master_mem⟩
  inter_mem := by
    rintro X Y ⟨x, hxC, hxX⟩ ⟨y, hyC, hyY⟩
    rcases hchain.total hxC hyC with hxy | hyx
    · exact ⟨y, hyC, y.inter_mem (hxy X hxX) hyY⟩
    · exact ⟨x, hxC, x.inter_mem hxX (hyx Y hyY)⟩
  up_mem := by
    rintro X Y ⟨x, hxC, hxX⟩ hY hXY
    exact ⟨x, hxC, x.up_mem hxX hY hXY⟩

theorem le_chainUnion (C : Set V.Element) (hne : C.Nonempty) (hchain : IsChain (· ≤ ·)
    C)
    {x : V.Element} (hx : x ∈ C) : x ≤ V.chainUnion C hne hchain :=
  fun _ hX => ⟨x, hx, hX⟩
```

```
theorem exists_total_ge (x : V.Element) : ∃ t, V.IsTotal t ∧ x ≤ t := by
  obtain ⟨m, hxm, hmax⟩ :=
    zorn_le_nonempty_Ici₀ x
      (fun c _ hchain y hy =>
        ⟨V.chainUnion c ⟨y, hy⟩ hchain, fun z hz => V.le_chainUnion c ⟨y, hy⟩ hchain hz⟩
    )
      x le_rfl
  exact ⟨m, fun y hy => hmax hy, hxm⟩
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
section

set_option linter.unusedVariables false

theorem example_124.{u_1} : ∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α)
  (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
  ∃ (t : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
    And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsTotal α V t)
      (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
        x t) :=
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.exists_total_ge
end

end DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
end
```

3.2.32 Exercise 1.25 — final segments of ordinals

(For set theorists). Let Δ be any well-ordered set (ordinal). (Even small ordinals like $\omega \cdot 3$ or ω^5 are interesting.) Let $\mathcal{D}$ be the family of non-empty *final* segments of Δ. What is $|\mathcal{D}|$? Are all elements finite? Is every approximation to a finite element finite?

Exercise_1_25.lean

```
module

import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.Factoid_1_7
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.DomainIso
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.principal
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_4
public import Mathlib.Algebra.Group.End
public import Mathlib.Order.UpperLower.Basic
```

```
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace FinalSegment
section

open NeighborhoodSystem

theorem upperSet_subset_or {Δ : Type*} [LinearOrder Δ] {X Y : Set Δ}
    (hX : IsUpperSet X) (hY : IsUpperSet Y) : X ⊆ Y ∨ Y ⊆ X := by
  by_cases h : X ⊆ Y
  · exact Or.inl h
  · right
    rw [Set.not_subset] at h
    obtain ⟨a, haX, haY⟩ := h
    intro b hbY
    rcases le_total a b with hab | hba
    · exact hX hab haX
    · exact absurd (hY hba hbY) haY

def finalSegmentSystem (Δ : Type*) [LinearOrder Δ] [Nonempty Δ] : NeighborhoodSystem
    Δ :=
  NeighborhoodSystem.ofNestedOrDisjoint
    (fun X => X.Nonempty ∧ IsUpperSet X)
    Set.univ
    Set.univ_nonempty
    ⟨Set.univ_nonempty, isUpperSet_univ⟩
    (fun _ _ hX hY => (upperSet_subset_or hX.2 hY.2).imp_right Or.inl)
    (fun _ => Set.subset_univ _)

section
variable {Δ : Type*} [LinearOrder Δ] [Nonempty Δ]

@[simp] theorem mem_def {X : Set Δ} :
    (finalSegmentSystem Δ).mem X ↔ X.Nonempty ∧ IsUpperSet X := Iff.rfl

@[simp] theorem master_eq : (finalSegmentSystem Δ).master = Set.univ := rfl

theorem Ici_mem (a : Δ) : (finalSegmentSystem Δ).mem (Set.Ici a) :=
  ⟨⟨a, le_refl a⟩, isUpperSet_Ici a⟩
end

section
variable {Δ : Type*} [LinearOrder Δ] [Nonempty Δ]
variable [WellFoundedLT Δ]

theorem exists_Ici_of_mem {X : Set Δ} (hX : (finalSegmentSystem Δ).mem X) :
    ∃ a, X = Set.Ici a := by
  obtain ⟨a, haX, hmin⟩ := wellFounded_lt.has_min X hX.1
  refine ⟨a, Set.ext fun b => ⟨fun hb => ?_, fun hb => ?_⟩⟩
  · rcases lt_or_ge b a with hlt | hge
    · exact absurd hlt (hmin b hb)
    · exact hge
  · exact hX.2 (Set.mem_Ici.mp hb) haX
```

```
def lowerSetOf (x : (finalSegmentSystem Δ).Element) : Set Δ :=
  {a : Δ | x.mem (Set.Ici a)}

omit [WellFoundedLT Δ] in
theorem lowerSetOf_isLowerSet (x : (finalSegmentSystem Δ).Element) :
    IsLowerSet (lowerSetOf x) := by
  intro a b hba ha
  exact x.up_mem ha (Ici_mem b) (Set.Ici_subset_Ici.mpr hba)

theorem lowerSetOf_nonempty (x : (finalSegmentSystem Δ).Element) : (lowerSetOf x).
    Nonempty := by
  obtain ⟨a, ha⟩ := exists_Ici_of_mem (X := (Set.univ : Set Δ)) ⟨Set.univ_nonempty,
    isUpperSet_univ⟩
  refine ⟨a, ?_⟩
  have hu : x.mem (Set.univ) := x.master_mem
  rw [ha] at hu
  exact hu

def ofLowerSet (S : Set Δ) (hSne : S.Nonempty) (_hS : IsLowerSet S) :
    (finalSegmentSystem Δ).Element where
  mem X := (finalSegmentSystem Δ).mem X ∧ ∃ a ∈ S, Set.Ici a ⊆ X
  sub h := h.1
  master_mem := by
    obtain ⟨a, ha⟩ := hSne
    exact ⟨⟨Set.univ_nonempty, isUpperSet_univ⟩, a, ha, Set.subset_univ _⟩
  inter_mem := by
    rintro X Y ⟨hX, a, haS, haX⟩ ⟨hY, b, hbS, hbY⟩
    have hsub : Set.Ici (max a b) ⊆ X ∩ Y :=
      Set.subset_inter
        ((Set.Ici_subset_Ici.mpr (le_max_left a b)).trans haX)
        ((Set.Ici_subset_Ici.mpr (le_max_right a b)).trans hbY)
    refine ⟨(finalSegmentSystem Δ).inter_mem hX hY (Ici_mem (max a b)) hsub, max a b,
    ?_, hsub⟩
    rcases max_choice a b with h | h
    · rw [h]; exact haS
    · rw [h]; exact hbS
  up_mem := by
    rintro X Y ⟨_, a, haS, haX⟩ hY hXY
    exact ⟨hY, a, haS, haX.trans hXY⟩

omit [WellFoundedLT Δ] in
theorem lowerSetOf_ofLowerSet (S : Set Δ) (hSne : S.Nonempty) (hS : IsLowerSet S) :
    lowerSetOf (ofLowerSet S hSne hS) = S := by
  ext a
  constructor
  · rintro ⟨_, b, hbS, hba⟩
    exact hS (Set.Ici_subset_Ici.mp hba) hbS
  · intro ha
    exact ⟨Ici_mem a, a, ha, subset_rfl⟩

theorem ofLowerSet_lowerSetOf (x : (finalSegmentSystem Δ).Element) :
    ofLowerSet (lowerSetOf x) (lowerSetOf_nonempty x) (lowerSetOf_isLowerSet x) = x :=
     by
  apply NeighborhoodSystem.Element.ext
  intro X
```

```
  constructor
  · rintro ⟨hX, a, haS, haX⟩
    exact x.up_mem haS hX haX
  · intro hX
    obtain ⟨a, rfl⟩ := exists_Ici_of_mem (x.sub hX)
    exact ⟨x.sub hX, a, hX, subset_rfl⟩

def finalSegmentClassify :
    (finalSegmentSystem Δ).Element ≃o {S : Set Δ // S.Nonempty ∧ IsLowerSet S} where
  toFun x := ⟨lowerSetOf x, lowerSetOf_nonempty x, lowerSetOf_isLowerSet x⟩
  invFun S := ofLowerSet S.1 S.2.1 S.2.2
  left_inv x := ofLowerSet_lowerSetOf x
  right_inv S := Subtype.ext (lowerSetOf_ofLowerSet S.1 S.2.1 S.2.2)
  map_rel_iff' := by
    intro x y
    constructor
    · intro h X hX
      obtain ⟨a, rfl⟩ := exists_Ici_of_mem (x.sub hX)
      exact h hX
    · intro h a ha
      exact h _ ha

omit [WellFoundedLT Δ]

def topElement : (finalSegmentSystem Δ).Element where
  mem X := (finalSegmentSystem Δ).mem X
  sub h := h
  master_mem := ⟨Set.univ_nonempty, isUpperSet_univ⟩
  inter_mem := by
    rintro X Y hX hY
    rcases upperSet_subset_or hX.2 hY.2 with h | h
    · rw [Set.inter_eq_left.mpr h]; exact hX
    · rw [Set.inter_eq_right.mpr h]; exact hY
  up_mem := fun _ hY _ => hY

omit [WellFoundedLT Δ]

theorem le_topElement (x : (finalSegmentSystem Δ).Element) : x ≤ topElement :=
  fun _ hX => x.sub hX

theorem topElement_isTotal : (finalSegmentSystem Δ).IsTotal (topElement (Δ := Δ)) :=
  fun y _ => le_topElement y

theorem eq_topElement_of_isTotal {x : (finalSegmentSystem Δ).Element}
    (hx : (finalSegmentSystem Δ).IsTotal x) : x = topElement :=
  le_antisymm (le_topElement x) (hx topElement (le_topElement x))

theorem topElement_not_principal_of_noMax (hnomax : ∀ a : Δ, ∃ b, a < b) (a : Δ) :
    topElement = (finalSegmentSystem Δ).principal (Ici_mem a) := by
  intro h
  obtain ⟨b, hab⟩ := hnomax a
  have hmem : ((finalSegmentSystem Δ).principal (Ici_mem a)).mem (Set.Ici b) := by
    rw [← h]; exact Ici_mem b
  have hsub : Set.Ici a ⊆ Set.Ici b := hmem.2
  exact absurd (Set.Ici_subset_Ici.mp hsub) (not_le.mpr hab)
end
```

```
end

end FinalSegment
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.FinalSegment
section

set_option linter.unusedVariables false

theorem example_125.{u_1} : And
  (∀ {Δ : Type u_1} [inst : LinearOrder Δ] [inst_1 : Nonempty Δ],
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsTotal Δ
      (@DomainTheory.NeighbourhoodSystems.FinalSegment.finalSegmentSystem Δ inst
    inst_1)
      (@DomainTheory.NeighbourhoodSystems.FinalSegment.topElement Δ inst inst_1))
  (∀ {Δ : Type u_1} [inst : LinearOrder Δ] [inst_1 : Nonempty Δ],
    (∀ (a : Δ),
        ∃ (b : Δ),
          @LT.lt Δ
            (@Preorder.toLT Δ
              (@PartialOrder.toPreorder Δ
                (@SemilatticeInf.toPartialOrder Δ
                  (@Lattice.toSemilatticeInf Δ
                    (@DistribLattice.toLattice Δ (@instDistribLatticeOfLinearOrder Δ
    inst))))))
            a b) →
      ∀ (a : Δ),
        @Ne
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Δ
            (@DomainTheory.NeighbourhoodSystems.FinalSegment.finalSegmentSystem Δ inst
     inst_1))
          (@DomainTheory.NeighbourhoodSystems.FinalSegment.topElement Δ inst inst_1)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal Δ
            (@DomainTheory.NeighbourhoodSystems.FinalSegment.finalSegmentSystem Δ inst
     inst_1)
            (@Set.Ici Δ
              (@PartialOrder.toPreorder Δ
                (@SemilatticeInf.toPartialOrder Δ
                  (@Lattice.toSemilatticeInf Δ
                    (@DistribLattice.toLattice Δ (@instDistribLatticeOfLinearOrder Δ
    inst)))))
              a)
          (@DomainTheory.NeighbourhoodSystems.FinalSegment.Ici_mem Δ inst inst_1 a))
    ) :=
  @And.intro
  (∀ {Δ : Type u_1} [inst : LinearOrder Δ] [inst_1 : Nonempty Δ],
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsTotal Δ
      (@DomainTheory.NeighbourhoodSystems.FinalSegment.finalSegmentSystem Δ inst
    inst_1)
      (@DomainTheory.NeighbourhoodSystems.FinalSegment.topElement Δ inst inst_1))
  (∀ {Δ : Type u_1} [inst : LinearOrder Δ] [inst_1 : Nonempty Δ],
    (∀ (a : Δ),
        ∃ (b : Δ),
          @LT.lt Δ
            (@Preorder.toLT Δ
              (@PartialOrder.toPreorder Δ
```

```
              (@SemilatticeInf.toPartialOrder Δ
                (@Lattice.toSemilatticeInf Δ
                  (@DistribLattice.toLattice Δ (@instDistribLatticeOfLinearOrder Δ
    inst))))))
            a b) →
      ∀ (a : Δ),
        @Ne
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Δ
            (@DomainTheory.NeighbourhoodSystems.FinalSegment.finalSegmentSystem Δ inst
     inst_1))
          (@DomainTheory.NeighbourhoodSystems.FinalSegment.topElement Δ inst inst_1)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal Δ
            (@DomainTheory.NeighbourhoodSystems.FinalSegment.finalSegmentSystem Δ inst
     inst_1)
            (@Set.Ici Δ
              (@PartialOrder.toPreorder Δ
                (@SemilatticeInf.toPartialOrder Δ
                  (@Lattice.toSemilatticeInf Δ
                    (@DistribLattice.toLattice Δ (@instDistribLatticeOfLinearOrder Δ
    inst)))))
              a)
            (@DomainTheory.NeighbourhoodSystems.FinalSegment.Ici_mem Δ inst inst_1 a))
    )
  @DomainTheory.NeighbourhoodSystems.FinalSegment.topElement_isTotal
  @DomainTheory.NeighbourhoodSystems.FinalSegment.topElement_not_principal_of_noMax
end

end DomainTheory.NeighbourhoodSystems.FinalSegment
namespace DomainTheory.NeighbourhoodSystems
namespace FinalSegment
section

open NeighborhoodSystem
variable {Δ : Type*} [LinearOrder Δ] [Nonempty Δ]

theorem principal_Ici_le_iff (a b : Δ) :
    (finalSegmentSystem Δ).principal (Ici_mem a) ≤ (finalSegmentSystem Δ).principal (
    Ici_mem b)
      ↔ a ≤ b := by
  rw [NeighborhoodSystem.principal_le_iff, Set.Ici_subset_Ici]
end

end FinalSegment
end DomainTheory.NeighbourhoodSystems
end
```

3.2.33 Exercise 1.26 — ideals of a ring

(For algebraists). Let A be a commutative ring with unit. Let Δ be the set of finite subsets $F \subseteq A$. Define

$$I(F) = \{G \in \Delta \mid F \subseteq \text{the ideal generated by } G\}.$$

Prove that the sets of the form $I(F)$ form a neighbourhood system, and that the corresponding domain is isomorphic to the set of ring-theoretic ideals of A partially ordered by inclusion. What would happen if

we excluded from Δ all F with $I(F) = I(\{1\})$, where 1 is the unit of A?

Exercise_1_26.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_1
public import Mathlib.RingTheory.Ideal.Span

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace Ring
section

open NeighborhoodSystem
variable {A : Type*} [CommRing A]

def IFamily (F : Finset A) : Set (Finset A) := {G | (↑F : Set A) ⊆ Ideal.span (↑G :
    Set A)}

@[simp] theorem mem_IFamily {F G : Finset A} :
    G ∈ IFamily F ↔ (↑F : Set A) ⊆ Ideal.span (↑G : Set A) := Iff.rfl

section
variable [DecidableEq A]

theorem IFamily_inter (F₁ F₂ : Finset A) :
    IFamily F₁ ∩ IFamily F₂ = IFamily (F₁ ∪ F₂) := by
  ext G
  simp only [IFamily, Set.mem_inter_iff, Set.mem_ofPred_eq, Finset.coe_union, Set.
    union_subset_iff]
end

theorem IFamily_subset_iff (F₁ F₂ : Finset A) :
    IFamily F₁ ⊆ IFamily F₂ ↔ (↑F₂ : Set A) ⊆ Ideal.span (↑F₁ : Set A) := by
  constructor
  · intro h
    have hF₁ : F₁ ∈ IFamily F₁ := mem_IFamily.mpr Ideal.subset_span
    exact (h hF₁)
  · intro h G hG
    rw [mem_IFamily] at hG ⊢
    exact h.trans (SetLike.coe_subset_coe.mpr (Ideal.span_le.mpr hG))

section
variable [DecidableEq A]

def ringSystem : NeighborhoodSystem (Finset A) where
  mem S := ∃ F, S = IFamily F
  master := IFamily ∅
  master_nonempty := ⟨∅, by simp [IFamily]⟩
  master_mem := ⟨∅, rfl⟩
  inter_mem := by
    rintro X Y Z ⟨F₁, rfl⟩ ⟨F₂, rfl⟩ _ _
```

```
    exact ⟨F₁ ∪ F₂, IFamily_inter F₁ F₂⟩
  sub_master := by
    rintro X ⟨F, rfl⟩
    exact (IFamily_subset_iff F ∅).mpr (by rw [Finset.coe_empty]; exact Set.
    empty_subset _)

@[simp] theorem ringSystem_mem {S : Set (Finset A)} :
    (ringSystem (A := A)).mem S ↔ ∃ F, S = IFamily F := Iff.rfl

theorem IFamily_mem (F : Finset A) : (ringSystem (A := A)).mem (IFamily F) := ⟨F, rfl⟩

def idealOf (x : (ringSystem (A := A)).Element) : Ideal A where
  carrier := {a | x.mem (IFamily {a})}
  zero_mem' := by
    show x.mem (IFamily {(0 : A)})
    refine x.up_mem x.master_mem (IFamily_mem {(0 : A)}) ?_
    intro G _
    rw [mem_IFamily, Finset.coe_singleton, Set.singleton_subset_iff]
    exact Submodule.zero_mem _
  add_mem' := by
    intro a b ha hb
    show x.mem (IFamily {a + b})
    have h := x.inter_mem ha hb
    rw [IFamily_inter] at h
    refine x.up_mem h (IFamily_mem {a + b}) ?_
    apply (IFamily_subset_iff _ _).mpr
    rw [Finset.coe_singleton, Set.singleton_subset_iff, Finset.coe_union,
      Finset.coe_singleton, Finset.coe_singleton]
    exact Ideal.add_mem _ (Ideal.subset_span (by simp)) (Ideal.subset_span (by simp))
  smul_mem' := by
    intro c a ha
    show x.mem (IFamily {c * a})
    refine x.up_mem ha (IFamily_mem {c * a}) ?_
    apply (IFamily_subset_iff _ _).mpr
    rw [Finset.coe_singleton, Set.singleton_subset_iff, Finset.coe_singleton]
    exact Submodule.smul_mem _ c (Ideal.subset_span (Set.mem_singleton a))

@[simp] theorem mem_idealOf {x : (ringSystem (A := A)).Element} {a : A} :
    a ∈ idealOf x ↔ x.mem (IFamily {a}) := Iff.rfl

theorem mem_IFamily_of_forall (x : (ringSystem (A := A)).Element) (F : Finset A)
    (h : ∀ a ∈ F, x.mem (IFamily {a})) : x.mem (IFamily F) := by
  classical
  induction F using Finset.induction with
  | empty => exact x.master_mem
  | @insert a F' _ ih =>
    have hins : (insert a F' : Finset A) = {a} ∪ F' := by
      ext y; simp [Finset.mem_insert]
    rw [hins, ← IFamily_inter]
    exact x.inter_mem (h a (by simp)) (ih (fun b hb => h b (by simp [hb])))

def ofIdeal (J : Ideal A) : (ringSystem (A := A)).Element where
  mem S := ∃ F, S = IFamily F ∧ Ideal.span (↑F : Set A) ≤ J
  sub := by rintro S ⟨F, rfl, _⟩; exact ⟨F, rfl⟩
  master_mem := by
    refine ⟨∅, rfl, ?_⟩
```

```
    rw [Finset.coe_empty, Ideal.span_empty]
    exact bot_le
  inter_mem := by
    rintro X Y ⟨F₁, rfl, h₁⟩ ⟨F₂, rfl, h₂⟩
    refine ⟨F₁ ∪ F₂, IFamily_inter F₁ F₂, ?_⟩
    rw [Finset.coe_union, Ideal.span_union]
    exact sup_le h₁ h₂
  up_mem := by
    rintro X Y ⟨F, rfl, hF⟩ ⟨F', rfl⟩ hXY
    refine ⟨F', rfl, ?_⟩
    have hsub : (↑F' : Set A) ⊆ Ideal.span (↑F : Set A) := (IFamily_subset_iff F F').
    mp hXY
    exact (Ideal.span_le.mpr hsub).trans hF

theorem ofIdeal_idealOf (x : (ringSystem (A := A)).Element) : ofIdeal (idealOf x) = x
    := by
  apply NeighborhoodSystem.Element.ext
  intro S
  constructor
  · rintro ⟨F, rfl, hF⟩
    refine mem_IFamily_of_forall x F (fun a ha => ?_)
    have haspan : a ∈ Ideal.span (↑F : Set A) := Ideal.subset_span (by simpa using ha)
    exact mem_idealOf.mp (hF haspan)
  · intro hS
    obtain ⟨F, rfl⟩ := x.sub hS
    refine ⟨F, rfl, ?_⟩
    rw [Ideal.span_le]
    intro a ha
    rw [SetLike.mem_coe, mem_idealOf]
    refine x.up_mem hS (IFamily_mem {a}) ?_
    apply (IFamily_subset_iff _ _).mpr
    rw [Finset.coe_singleton, Set.singleton_subset_iff]
    exact Ideal.subset_span ha
end

theorem span_eq_of_IFamily_eq {F₁ F₂ : Finset A} (h : IFamily F₁ = IFamily F₂) :
    Ideal.span (↑F₁ : Set A) = Ideal.span (↑F₂ : Set A) := by
  have h12 : (↑F₂ : Set A) ⊆ Ideal.span (↑F₁ : Set A) :=
    (IFamily_subset_iff F₁ F₂).mp h.le
  have h21 : (↑F₁ : Set A) ⊆ Ideal.span (↑F₂ : Set A) :=
    (IFamily_subset_iff F₂ F₁).mp h.ge
  exact le_antisymm (Ideal.span_le.mpr h21) (Ideal.span_le.mpr h12)

section
variable [DecidableEq A]

theorem mem_ofIdeal_IFamily (J : Ideal A) (F : Finset A) :
    (ofIdeal J).mem (IFamily F) ↔ Ideal.span (↑F : Set A) ≤ J := by
  constructor
  · rintro ⟨F', hF', hle⟩
    rw [span_eq_of_IFamily_eq hF']
    exact hle
  · intro h
    exact ⟨F, rfl, h⟩

theorem idealOf_ofIdeal (J : Ideal A) : idealOf (ofIdeal J) = J := by
```

```
  apply SetLike.ext
  intro a
  rw [mem_idealOf, mem_ofIdeal_IFamily, Finset.coe_singleton, Ideal.
    span_singleton_le_iff_mem]

def ringIso : (ringSystem (A := A)).Element ≃o Ideal A where
  toFun := idealOf
  invFun := ofIdeal
  left_inv := ofIdeal_idealOf
  right_inv := idealOf_ofIdeal
  map_rel_iff' := by
    intro x y
    constructor
    · intro h S hS
      obtain ⟨F, rfl⟩ := x.sub hS
      refine mem_IFamily_of_forall y F (fun a ha => ?_)
      have hax : a ∈ idealOf x := by
        rw [mem_idealOf]
        exact x.up_mem hS (IFamily_mem {a}) <| (IFamily_subset_iff _ _).mpr <| by
          rw [Finset.coe_singleton, Set.singleton_subset_iff]
          exact Ideal.subset_span (by simpa using ha)
      exact mem_idealOf.mp (h hax)
    · intro h a ha
      exact h (IFamily {a}) ha
end

theorem IFamily_eq_of_span_eq {F₁ F₂ : Finset A}
    (h : Ideal.span (↑F₁ : Set A) = Ideal.span (↑F₂ : Set A)) : IFamily F₁ = IFamily F₂
    := by
  apply Set.Subset.antisymm
  · exact (IFamily_subset_iff F₁ F₂).mpr (by rw [h]; exact Ideal.subset_span)
  · exact (IFamily_subset_iff F₂ F₁).mpr (by rw [← h]; exact Ideal.subset_span)
end

end Ring
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Ring
section

set_option linter.unusedVariables false

theorem example_126.{u_1} : ∀ {A : Type u_1} [inst : CommRing A] {F₁ F₂ : Finset A},
  @Eq (@Ideal A (@CommSemiring.toSemiring A (@CommRing.toCommSemiring A inst)))
      (@Ideal.span A (@CommSemiring.toSemiring A (@CommRing.toCommSemiring A inst))
        (@SetLike.coe (Finset A) A (@Finset.instSetLike A) F₁))
      (@Ideal.span A (@CommSemiring.toSemiring A (@CommRing.toCommSemiring A inst))
        (@SetLike.coe (Finset A) A (@Finset.instSetLike A) F₂)) →
    @Eq (Set (Finset A)) (@DomainTheory.NeighbourhoodSystems.Ring.IFamily A inst F₁)
      (@DomainTheory.NeighbourhoodSystems.Ring.IFamily A inst F₂) :=
  @DomainTheory.NeighbourhoodSystems.Ring.IFamily_eq_of_span_eq
end

end DomainTheory.NeighbourhoodSystems.Ring
end
```

3.2.34 Exercise 1.27 — suprema of bounded sets

Further closure properties of domains can be proved for bounded sets. We say $X \subseteq |\mathcal{D}|$ is *bounded* iff for some $y \in |\mathcal{D}|$ we have $x \subseteq y$ for all $x \in X$. This y is called an *upper bound*. We let

$$\bigsqcup X = \bigcap \{y \in |\mathcal{D}| \mid x \subseteq y \text{ all } x \in X\}.$$

Prove that if X is bounded, then $\bigsqcup X$ is the *least upper bound* for X in $|\mathcal{D}|$. Prove also: if $U, V \in \mathcal{D}$ are neighbourhoods, then $\{U, V\}$ is consistent in $\mathcal{D}$ iff $\{\uparrow U, \uparrow V\}$ is bounded in $|\mathcal{D}|$. (That is, boundedness is for elements what consistency is for neighbourhoods.) Prove finally with the aid of 1.18 that $X \subseteq |\mathcal{D}|$ is bounded iff every finite subset of X is bounded.

Exercise_1_27.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_18
import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.Factoid_1_7
import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.Factoid_1_5
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.principal
public import Mathlib.Basic.Finite.Defs

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)

def Bounded (X : Set V.Element) : Prop := ∃ y : V.Element, ∀ x ∈ X, x ≤ y

def pairSeq (U W : Set α) : ℕ → Set α := fun i => if i = 0 then U else W

def upperBounds (X : Set V.Element) : Set V.Element := {y | ∀ x ∈ X, x ≤ y}

theorem upperBounds_nonempty {X : Set V.Element} (hX : V.Bounded X) :
    (V.upperBounds X).Nonempty :=
  hX.imp fun _ hy => hy

def sSup (X : Set V.Element) (hX : V.Bounded X) : V.Element :=
  V.sInf (V.upperBounds X) (V.upperBounds_nonempty hX)

theorem bounded_iff_finite_bounded (X : Set V.Element) :
    V.Bounded X ↔ ∀ S : Set V.Element, S ⊆ X → S.Finite → V.Bounded S := by
  constructor
  · rintro ⟨y, hy⟩ S hS _
    exact ⟨y, fun x hx => hy x (hS hx)⟩
  · intro hfin
    set C : Set (Set α) := {Z | ∃ x : V.Element, x ∈ X ∧ x.mem Z} with hCdef
    have hCsub : ∀ Z ∈ C, V.mem Z := by rintro Z ⟨x, _, hxZ⟩; exact x.sub hxZ
    have hCcons : V.FinitelyConsistent C := by
      intro n seq hseqC
```

```
      choose g hgX hgmem using hseqC
      set S : Set V.Element := Set.range (fun i : Fin n => g i.1 i.2) with hSdef
      have hSfin : S.Finite := Set.finite_range _
      have hSsub : S ⊆ X := by
        rintro _ ⟨i, rfl⟩
        exact hgX i.1 i.2
      obtain ⟨y, hy⟩ := hfin S hSsub hSfin
      have hseqy : ∀ i, i < n → y.mem (seq i) := by
        intro i hi
        have hle : g i hi ≤ y := hy _ ⟨⟨i, hi⟩, rfl⟩
        exact hle (seq i) (hgmem i hi)
      have hmem : y.mem (V.interUpTo seq n) := y.mem_interUpTo seq hseqy
      exact ⟨V.interUpTo seq n, y.sub hmem, subset_rfl⟩
    refine ⟨V.leastFilter C hCsub hCcons, ?_⟩
    intro x hx Z hZ
    exact V.subset_leastFilter C hCsub hCcons ⟨x, hx, hZ⟩

theorem interUpTo_pairSeq (U W : Set α) :
    V.interUpTo (pairSeq U W) 2 = V.master ∩ U ∩ W := by
  simp only [interUpTo_succ, interUpTo_zero, pairSeq]
  norm_num

theorem consistent_pair_iff_bounded {U W : Set α} (hU : V.mem U) (hW : V.mem W) :
    V.Consistent (pairSeq U W) 2 ↔ V.Bounded {V.principal hU, V.principal hW} := by
  constructor
  · rintro ⟨Z, hZmem, hZsub⟩
    rw [V.interUpTo_pairSeq] at hZsub
    have hZU : Z ⊆ U := hZsub.trans (Set.inter_subset_left.trans Set.
    inter_subset_right)
    have hZW : Z ⊆ W := hZsub.trans Set.inter_subset_right
    refine ⟨V.principal hZmem, ?_⟩
    intro x hx
    rcases hx with rfl | rfl
    · exact (V.principal_le_iff hU hZmem).mpr hZU
    · exact (V.principal_le_iff hW hZmem).mpr hZW
  · rintro ⟨y, hy⟩
    have hyU : y.mem U :=
      hy _ (Or.inl rfl) U ⟨hU, subset_rfl⟩
    have hyW : y.mem W :=
      hy _ (Or.inr rfl) W ⟨hW, subset_rfl⟩
    have hyUW : y.mem (U ∩ W) := y.inter_mem hyU hyW
    refine ⟨U ∩ W, y.sub hyUW, ?_⟩
    rw [V.interUpTo_pairSeq]
    intro z hz
    exact ⟨⟨V.sub_master hU hz.1, hz.1⟩, hz.2⟩

theorem le_sSup (X : Set V.Element) (hX : V.Bounded X) {x : V.Element} (hx : x ∈ X) :
    x ≤ V.sSup X hX :=
  V.le_sInf (V.upperBounds X) (V.upperBounds_nonempty hX) x (fun _ hy => hy x hx)

theorem sSup_le (X : Set V.Element) (hX : V.Bounded X) {z : V.Element}
    (hz : ∀ x ∈ X, x ≤ z) : V.sSup X hX ≤ z :=
  V.sInf_le (V.upperBounds X) (V.upperBounds_nonempty hX) hz
end

end NeighborhoodSystem
```

```
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
section

set_option linter.unusedVariables false

theorem example_127.{u_1} : And
  (And
    (And
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
        (X : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)),
        Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V X)
          (∀ (S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
    V)),
            @LE.le (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
    α V))
              (@Set.instLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V)) S X →
            @Set.Finite (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V) S →
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V S))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
    U W : Set α}
        (hU : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V U)
        (hW : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V W),
        Iff
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Consistent α V
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.pairSeq α U W)
            (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2))))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V
            (@Insert.insert (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V)
              (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
    )
              (@Set.instInsert (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V U
    hU)
              (@Singleton.singleton (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
                (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
    V))
                (@Set.instSingletonSet (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V))
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V W
     hW))))))
     (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
       (X : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
       (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V X)
       {x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
      @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
     V)
        (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
        (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V)) X x →
        @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
```

```
       (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V)
         (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
       x (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α V X hX)))
(∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
  (X : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
  (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V X)
  {z : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
  (∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
     @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   α V)
         (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
         (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)) X x →
       @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
         (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V)
           (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
         x z) →
    @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   α V)
       (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α V X hX) z) :=
@And.intro
(And
  (And
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
      (X : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)),
      Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V X)
        (∀ (S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
   V)),
          @LE.le (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   α V))
            (@Set.instLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V)) S X →
          @Set.Finite (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V) S →
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V S))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
  U W : Set α}
      (hU : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V U)
      (hW : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V W),
      Iff
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Consistent α V
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.pairSeq α U W)
          (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2))))
```

```
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V
         (@Insert.insert (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)
           (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
 )
           (@Set.instInsert (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V))
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V U
 hU)
           (@Singleton.singleton (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
             (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
 V))
             (@Set.instSingletonSet (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V))
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V W
  hW))))))
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
    (X : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
    (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V X)
    {x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
    @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
  V)
       (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
       (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)) X x →
     @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
       (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)
         (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V)))
       x (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α V X hX)))
(∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
  (X : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
  (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V X)
  {z : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
  (∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
     @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
  α V)
         (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
         (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)) X x →
       @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
         (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)
           (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V)))
         x z) →
   @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
     (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
  α V)
       (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
```

```
 NeighborhoodSystem.Element α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V)))
     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α V X hX) z)
(@And.intro
  (And
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
      (X : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)),
      Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V X)
        (∀ (S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
  V)),
          @LE.le (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
  α V))
            (@Set.instLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)) S X →
            @Set.Finite (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V) S →
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V S))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
 U W : Set α}
      (hU : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V U)
      (hW : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V W),
      Iff
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Consistent α V
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.pairSeq α U W)
          (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2))))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V
          (@Insert.insert (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)
            (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
 )
            (@Set.instInsert (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V))
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V U
 hU)
            (@Singleton.singleton (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
              (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
 V))
              (@Set.instSingletonSet (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V W
  hW))))))
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
    (X : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
    (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V X)
    {x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
    @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
  V)
      (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
      (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)) X x →
    @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
```

```
    NeighborhoodSystem.Element α V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
          x (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α V X hX))
     (@And.intro
       (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
         (X : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)),
         Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V X)
           (∀ (S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
     V)),
            @LE.le (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     α V))
                (@Set.instLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V)) S X →
              @Set.Finite (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V) S →
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V S))
       (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
    U W : Set α}
         (hU : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V U)
         (hW : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V W),
         Iff
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Consistent α V
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.pairSeq α U W)
             (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2))))
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α V
             (@Insert.insert (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V)
               (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
    )
               (@Set.instInsert (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V))
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V U
    hU)
               (@Singleton.singleton (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
                 (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
    V))
                 (@Set.instSingletonSet (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V))
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V W
     hW)))))
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bounded_iff_finite_bounded
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    consistent_pair_iff_bounded)
     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.le_sSup)
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup_le
end

end DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section

variable {α : Type*} (V : NeighborhoodSystem α)
```

```
def bracket (X : Set α) : Set V.Element := {x | x.mem X}

@[simp] theorem mem_bracket {X : Set α} {x : V.Element} : x ∈ V.bracket X ↔ x.mem X :=
     Iff.rfl

@[simp] theorem bracket_master : V.bracket V.master = Set.univ := by
  ext x; simp only [mem_bracket, Set.mem_univ, iff_true]; exact x.master_mem

theorem bracket_inter {X Y : Set α} (hX : V.mem X) (hY : V.mem Y) :
    V.bracket X ∩ V.bracket Y = V.bracket (X ∩ Y) := by
  ext x
  simp only [Set.mem_inter_iff, mem_bracket]
  constructor
  · rintro ⟨hx, hy⟩
    exact x.inter_mem hx hy
  · intro hxy
    exact ⟨x.up_mem hxy hX Set.inter_subset_left, x.up_mem hxy hY Set.
    inter_subset_right⟩

theorem principal_mem_bracket {X : Set α} (hX : V.mem X) : V.principal hX ∈ V.bracket
    X :=
  ⟨hX, subset_rfl⟩

theorem bracket_subset_iff {X Y : Set α} (hX : V.mem X) (hY : V.mem Y) :
    V.bracket X ⊆ V.bracket Y ↔ X ⊆ Y := by
  constructor
  · intro h
    exact (h (V.principal_mem_bracket hX)).2
  · intro hXY x hx
    exact x.up_mem hx hY hXY

theorem bracket_injective {X Y : Set α} (hX : V.mem X) (hY : V.mem Y)
    (h : V.bracket X = V.bracket Y) : X = Y :=
  Set.Subset.antisymm ((V.bracket_subset_iff hX hY).mp h.subset)
    ((V.bracket_subset_iff hY hX).mp h.superset)
end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
end
```

3.3 Mappings between domains

Dependency diagram. Each box is one item. The arrowhead is on the item that imports. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it is not shown. Blue is a definition, green a proposition, amber an example, red a theorem, and indigo an exercise.

Figure 40: Mappings between domains.

3.3.1 Introduction

LECTURE II MAPPINGS BETWEEN DOMAINS

The elements of a domain are regarded as being specified by approximations: the neighbourhoods. With the idea of approximation as the dominant notion, therefore, it is natural to look for a concept of mapping (transformation of domains) that in some suitable sense preserves the spirit of the approximations. In a 'theory of computability,' where the (finite) approximations to the elements are all we can ever know at one time, the only mappings that can be computed are those that proceed by approximation, somehow passing from the neighbourhoods of one domain over to the neighbourhoods of the other.

Suppose $X \in \mathcal{D}_0$ is given - it is an approximation to certain elements of $|\mathcal{D}_0|$. (More precisely $\uparrow X$ is the approximation in the domain, but it is easier to speak of the neighbourhood X.) What can be said about the approximations of the images of these elements under the mapping we will call f? If X is not a very sharp approximation, then not very much can be said about the image in the other domain $|\mathcal{D}_1|$. Trivially, of course, we can say that Δ_1 is an approximation - because it approximates everything in its domain. Suppose, however, that we could say more. Suppose we could say that both Y and Y' approximate the image of X. If the mapping f is coherent, then it is reasonable to suppose that such a statement would imply that Y and Y' are *consistent* in $\mathcal{D}_1$. But if this is so, then since the two neighbourhoods are meant to cluster around the same images, we can feel some confidence in saying that $Y \cap Y'$ approximates these images. In other words to specify f we do not supply a unique image of X, but we say which of the $Y \in \mathcal{D}_1$ approximate the (ideal) image. To make this idea work a *monotonicity condition* is also needed since we are trying to express the idea that "if we give at least X as an approximate input to f, then we can expect at least Y as output." Thus,

a mapping is taken as a kind of relation between neighbourhoods.

3.3.2 Definition 2.1 — approximable mapping

DEFINITION 2.1. An *approximable mapping* $f : D_0 \to D_1$ between domains is a binary relation $f \subseteq D_0 \times D_1$ between neighbourhoods such that

(i) $\Delta_0 f \Delta_1$;

(ii) XfY and XfY' always imply $Xf(Y \cap Y')$;

(iii) XfY, $X' \subseteq X$, and $Y \subseteq Y'$ always imply $X'fY'$. □

Condition (i) we have already discussed; in a sense it means "ask me no questions and I shall tell you no lies." In other words "zero input can expect at least zero output." The other conditions are compatible with having

$$f = \{\langle X, \Delta_1 \rangle \mid X \in D_0\};$$

that is, f might be the least informative relation and nothing more. But if it is more, then (ii) is, as we explained, a consistency condition. To explain monotonicity in (iii), suppose a mapping relationship is already known, XfY, say. If we *improve* the accuracy of X to $X' \subseteq X$ and if we *degrade* the accuracy of Y to $Y' \supseteq Y$, then we can still assert $X'fY'$ since this relationship is *less informative* than the former relationship, which was already known. Thus, we see that conditions (i)–(iii) are all reasonably argued as necessary.

One indication that the conditions of 2.1 are sufficient for a definition is that they are exactly what we need to show that f as a neighbourhood relation determines an equivalent elementwise mapping from $|D_0|$ into $|D_1|$. (Owing to the equivalence, we use the same symbol f for both.)

Definition_2_1.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_1
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

section
variable {α β ? ? : Type*}

structure ApproximableMap (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) where

  rel : Set α → Set β → Prop

  rel_dom : ∀ {X Y}, rel X Y → V₀.mem X

  rel_cod : ∀ {X Y}, rel X Y → V₁.mem Y

  master_rel : rel V₀.master V₁.master

  inter_right : ∀ {X Y Y'}, rel X Y → rel X Y' → rel X (Y ∩ Y')

  mono : ∀ {X X' Y Y'}, rel X Y → X' ⊆ X → Y ⊆ Y' → V₀.mem X' → V₁.mem Y' → rel X'
    Y'

namespace ApproximableMap

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

theorem ext {f g : ApproximableMap V₀ V₁} (h : ∀ X Y, f.rel X Y ↔ g.rel X Y) : f = g
    := by
  obtain ⟨rf, _, _, _, _, _⟩ := f
  obtain ⟨rg, _, _, _, _, _⟩ := g
  have : rf = rg := by funext X Y; exact propext (h X Y)
  subst this; rfl

end ApproximableMap

namespace NeighborhoodSystem
```

```
def sSupDirected (V : NeighborhoodSystem α) (S : Set V.Element) (hne : S.Nonempty)
    (hdir : ∀ a ∈ S, ∀ b ∈ S, ∃ c ∈ S, a ≤ c ∧ b ≤ c) : V.Element where
  mem Z := ∃ s ∈ S, s.mem Z
  sub := fun ⟨s, _, hs⟩ => s.sub hs
  master_mem := by obtain ⟨s, hs⟩ := hne; exact ⟨s, hs, s.master_mem⟩
  inter_mem := by
    rintro Z Z' ⟨a, haS, haZ⟩ ⟨b, hbS, hbZ⟩
    obtain ⟨c, hcS, hac, hbc⟩ := hdir a haS b hbS
    exact ⟨c, hcS, c.inter_mem (hac Z haZ) (hbc Z' hbZ)⟩
  up_mem := by
    rintro Z Z' ⟨a, haS, haZ⟩ hZ' hZZ'
    exact ⟨a, haS, a.up_mem haZ hZ' hZZ'⟩

end NeighborhoodSystem
end

end DomainTheory.NeighbourhoodSystems
```

3.3.3 Proposition 2.2 — elementwise action

PROPOSITION 2.2. Given neighbourhood systems D_0 and D_1, an approximable mapping $f : D_0 \to D_1$ always determines a function $f : |D_0| \to |D_1|$ between domains by virtue of the formula:

(i) $f(x) = \{Y \in D_1 \mid \exists X \in x.\ XfY\}$

for all $x \in |D_0|$. Conversely, this function uniquely determines the original relation by the equivalence:

(ii) XfY iff $Y \in f(\uparrow X)$

for all $X \in D_0$ and $Y \in D_1$. Approximable functions are always monotone in the following sense:

(iii) $x \subseteq y$ always implies $f(x) \subseteq f(y)$,

for $x, y \in |D_0|$; moreover two approximable functions $f : D_0 \to D_1$ and $g : D_0 \to D_1$ are identical as relations iff

(iv) $f(x) = g(x)$, for all $x \in |D_0|$.

Proof: The argument that formula (i) always gives us $f(x) \in |D_1|$ when $x \in |D_0|$ can be safely left to the reader. Note, however, that all the conditions of 2.1 are required to show this. As for (ii), the implication from left to right follows directly from (i) because $X \in \uparrow X$. In the other direction $Y \in f(\uparrow X)$ means that ZfY holds for some $Z \in \uparrow X$. But from $X \subseteq Z$ it follows that XfY, as we wished.

To prove monotonicity, assume $x \subseteq y$. Now $X \in x$ and XfY always imply $X \in y$ and XfY. This means $Y \in f(x)$ always implies $Y \in f(y)$; that is, $f(x) \subseteq f(y)$.

Finally, to check that (iv) means $f = g$ as relations, all that has to be remarked that this follows from formulae (i) and (ii). □

Note that the right-hand side of (ii) can be written:

$$\uparrow Y \subseteq f(\uparrow X),$$

which can be read as saying that the partial element determined by the neighbourhood Y approximates the function value at the element determined by X. This precise relationship of course fits the informal discussion of mapping given earlier. Indeed whenever $x \in [X]$ and $X\,f\,Y$ hold, then $f(x) \in [Y]$ always follows, which is another way to construe the mapping character of f. Some examples of mappings are now called for.

Proposition_2_2.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Definition_2_1

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.principal
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

namespace ApproximableMap

section
variable {α β ? ? : Type*}

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

def toElementMap (f : ApproximableMap V₀ V₁) (x : V₀.Element) : V₁.Element where
  mem Y := ∃ X, x.mem X ∧ f.rel X Y
  sub := fun ⟨_, _, hXY⟩ => f.rel_cod hXY
  master_mem := ⟨V₀.master, x.master_mem, f.master_rel⟩
  inter_mem := by
    rintro Y Y' ⟨X, hX, hXY⟩ ⟨X', hX', hX'Y'⟩
    have hXX'mem : x.mem (X ∩ X') := x.inter_mem hX hX'
    have hXX' : V₀.mem (X ∩ X') := x.sub hXX'mem
    refine ⟨X ∩ X', hXX'mem, ?_⟩
    have h1 : f.rel (X ∩ X') Y :=
      f.mono hXY Set.inter_subset_left subset_rfl hXX' (f.rel_cod hXY)
    have h2 : f.rel (X ∩ X') Y' :=
      f.mono hX'Y' Set.inter_subset_right subset_rfl hXX' (f.rel_cod hX'Y')
    exact f.inter_right h1 h2
  up_mem := by
    rintro Y Y' ⟨X, hX, hXY⟩ hY' hYY'
    exact ⟨X, hX, f.mono hXY subset_rfl hYY' (x.sub hX) hY'⟩

@[simp] theorem mem_toElementMap (f : ApproximableMap V₀ V₁) (x : V₀.Element) {Y : Set
    β} :
    (f.toElementMap x).mem Y ↔ ∃ X, x.mem X ∧ f.rel X Y := Iff.rfl

theorem rel_iff_mem_principal (f : ApproximableMap V₀ V₁) {X : Set α} (hX : V₀.mem X) {
    Y : Set β} :
    f.rel X Y ↔ (f.toElementMap (V₀.principal hX)).mem Y := by
  constructor
  · intro hXY
```

```
    exact ⟨X, ⟨hX, subset_rfl⟩, hXY⟩
  · rintro ⟨Z, ⟨_, hXZ⟩, hZY⟩
    exact f.mono hZY hXZ subset_rfl hX (f.rel_cod hZY)

theorem ext_of_toElementMap {f g : ApproximableMap V₀ V₁}
    (h : ∀ x, f.toElementMap x = g.toElementMap x) : f = g := by
  apply ApproximableMap.ext
  intro X Y
  by_cases hX : V₀.mem X
  · rw [f.rel_iff_mem_principal hX, g.rel_iff_mem_principal hX, h]
  · constructor
    · intro hr; exact absurd (f.rel_dom hr) hX
    · intro hr; exact absurd (g.rel_dom hr) hX

theorem rel_master (f : ApproximableMap V₀ V₁) {X : Set α} (hX : V₀.mem X) :
    f.rel X V₁.master :=
  f.mono f.master_rel (V₀.sub_master hX) subset_rfl hX V₁.master_mem
end

end ApproximableMap

section
variable {α β ? ? : Type*}

namespace NeighborhoodSystem

theorem sSupDirected_le (V : NeighborhoodSystem α) (S : Set V.Element) (hne : S.
    Nonempty)
    (hdir : ∀ a ∈ S, ∀ b ∈ S, ∃ c ∈ S, a ≤ c ∧ b ≤ c) {y : V.Element}
    (hy : ∀ s ∈ S, s ≤ y) : V.sSupDirected S hne hdir ≤ y := by
  rintro Z ⟨s, hs, hsZ⟩
  exact hy s hs Z hsZ

theorem le_sSupDirected (V : NeighborhoodSystem α) (S : Set V.Element) (hne : S.
    Nonempty)
    (hdir : ∀ a ∈ S, ∀ b ∈ S, ∃ c ∈ S, a ≤ c ∧ b ≤ c) {a : V.Element} (ha : a ∈ S) :
    a ≤ V.sSupDirected S hne hdir :=
  fun _ hZ => ⟨a, ha, hZ⟩

end NeighborhoodSystem

namespace ApproximableMap

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

theorem toElementMap_mono (f : ApproximableMap V₀ V₁) {x y : V₀.Element} (hxy : x ≤ y)
    :
    f.toElementMap x ≤ f.toElementMap y := by
  rintro Y ⟨X, hX, hXY⟩
  exact ⟨X, hxy X hX, hXY⟩

end ApproximableMap
end

end DomainTheory.NeighbourhoodSystems
```

3.3.4 Example 2.3 — parity of leading zeros

EXAMPLE 2.3. Let T be the neighbourhood system of the two-token domain of Example 1.2. To avoid confusion with some other domains, we will call the two total elements of $|T|$ respectively true and false. There is only one other finite element here, namely $\perp =$ undefined. We often use these elements as indicators of results: true indicates a positive outcome; false, a negative outcome; and $\perp$ indicates that there is not enough information to decide the outcome totally.

Let B be the system for the binary tree as in the last chapter. What we wish to define is an approximable mapping $f : B \to T$. The intuitive idea of the mapping we have in mind is that the binary sequence is being read from left to right, and we are counting the number of 0's seen before the first 1 is encountered. We then test the parity of this count; if it is even, the output is true; if not, false. Using a suggestive informal notation with three dots, some results of the function that does the counting and testing can be written as:

$$\begin{aligned} f(0000101\ldots) &= \text{true} \\ f(1101110\ldots) &= \text{true} \\ f(0111011\ldots) &= \text{false} \\ f(0000000\ldots) &= \perp . \end{aligned}$$

The last equation is necessary, because 0000000 as a partial element cannot be counted as either even or odd since it can have inconsistent extensions:

$$\begin{aligned} &0000000\ \perp \sqsubseteq 00000001\ \perp \\ &0000000\ \perp \sqsubseteq 000000000001\ \perp . \end{aligned}$$

So, as far as f is concerned, a plain string of 0's is indefinite. The same answer holds if the 0's go on infinitely.

To be more precise we want

$$\begin{aligned} f(0^n 1\ \perp) &= \text{true} \quad \text{if } n \text{ is even;} \\ &= \text{false} \quad \text{if } n \text{ is odd.} \end{aligned}$$

As a binary relation $f \subseteq B \times T$ we will have

$X f Y$ iff $Y \in \perp$ or $X \sqsubseteq 0^n 1\Delta$ for some $n \in \mathbf{N}$ and either n is even and $Y \in$ true or n is odd and $Y \in$ false.

It should be checked that 2.1(i)–(ii) are satisfied. □

Example_2_3.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_2
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Examples_1_2_1_5_revisited
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Example23
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ExampleB

section
```

```
abbrev T : NeighborhoodSystem Example12.Token := Example12.neighborhoodSystem
end

section

def botElt : T.Element := Example12.neighborhoodSystem.bot
end

section

theorem botElt_le (x : T.Element) : botElt ≤ x := by
  intro Z hZ
  have : Z = Example12.master := hZ
  subst this
  exact x.master_mem
end

section

def falseElt : T.Element := Example12.neighborhoodSystem.elemOne
end

section

def scan : Str → Option Bool
  | [] => none
  | true :: _ => some true
  | false :: t => (scan t).map (!·)
end

section
@[simp] theorem scan_nil : scan [] = none := rfl
end

section
@[simp] theorem scan_true (t : Str) : scan (true :: t) = some true := rfl
end

section
@[simp] theorem scan_false (t : Str) : scan (false :: t) = (scan t).map (!·) := rfl
end

section

theorem scan_append {σ : Str} {b : Bool} (h : scan σ = some b) (t : Str) :
    scan (σ ++ t) = some b := by
  induction σ generalizing b with
  | nil => simp at h
  | cons c σ₀ ih =>
    cases c with
    | true => simp only [scan_true] at h ⊢; exact h
    | false =>
      simp only [List.cons_append, scan_false] at h ⊢
      rw [Option.map_eq_some_iff] at h
      obtain ⟨a, ha, rfl⟩ := h
```

```
      rw [ih ha]
      rfl
end

section

def trueElt : T.Element := Example12.neighborhoodSystem.elemZero
end

section

def valElt : Option Bool → T.Element
  | none => botElt
  | some true => trueElt
  | some false => falseElt
end

section

theorem valElt_scan_mono {σ σ' : Str} (h : σ <+: σ') :
    valElt (scan σ) ≤ valElt (scan σ') := by
  obtain ⟨t, rfl⟩ := h
  cases hσ : scan σ with
  | none => simpa [valElt, hσ] using botElt_le _
  | some b => rw [scan_append hσ t]
end

section

def parityMap : ApproximableMap B T where
  rel X Y := ∃ σ, X = cone σ ∧ (valElt (scan σ)).mem Y
  rel_dom := fun ⟨σ, hX, _⟩ => ⟨σ, hX⟩
  rel_cod := fun ⟨_, _, hY⟩ => (valElt _).sub hY
  master_rel := by
    refine ⟨[], cone_nil.symm, ?_⟩
    show (botElt).mem Example12.master
    rfl
  inter_right := by
    rintro X Y Y' ⟨σ, hX, hY⟩ ⟨σ', hX', hY'⟩
    have hσ : σ = σ' := cone_injective (hX ▶ hX')
    subst hσ
    exact ⟨σ, hX, (valElt (scan σ)).inter_mem hY hY'⟩
  mono := by
    rintro X X' Y Y' ⟨σ, hX, hY⟩ hX'X hYY' hX'mem hY'mem
    obtain ⟨σ', hX'cone⟩ := hX'mem
    have hpre : σ <+: σ' := by
      apply cone_subset_cone.mp
      rw [← hX'cone, ← hX]; exact hX'X
    have hYmem' : (valElt (scan σ)).mem Y' := (valElt (scan σ)).up_mem hY hY'mem hYY'
    exact ⟨σ', hX'cone, valElt_scan_mono hpre Y' hYmem'⟩
end

section

theorem eq_botElt_of_le {a : T.Element} (h0 : a ≤ trueElt) (h1 : a ≤ falseElt) : a =
    botElt :=
```

```
  Example12.neighborhoodSystem.eq_bot_of_le_elemZero_of_le_elemOne h0 h1
end

section

theorem parityMap_rel_cone (σ : Str) (Y : Set Example12.Token) :
    parityMap.rel (cone σ) Y ↔ (valElt (scan σ)).mem Y := by
  constructor
  · rintro ⟨?, h?, hval⟩
    rw [cone_injective h?]
    exact hval
  · intro hval
    exact ⟨σ, rfl, hval⟩
end

section

theorem parityMap_toElementMap_mem (x : B.Element) (Y : Set Example12.Token) :
    (parityMap.toElementMap x).mem Y ↔ ∃ τ, x.mem (cone τ) ∧ (valElt (scan τ)).mem Y
    := by
  constructor
  · rintro ⟨X, hX, hrel⟩
    obtain ⟨τ, rfl⟩ := x.sub hX
    exact ⟨τ, hX, (parityMap_rel_cone τ Y).mp hrel⟩
  · rintro ⟨τ, hτ, hval⟩
    exact ⟨cone τ, hτ, (parityMap_rel_cone τ Y).mpr hval⟩
end

section

theorem parityMap_toElementMap_sigmaElt (σ : Str) (x : B.Element) (Y : Set Example12.
    Token) :
    (parityMap.toElementMap (sigmaElt σ x)).mem Y ↔
      ∃ τ, x.mem (cone τ) ∧ (valElt (scan (σ ++ τ))).mem Y := by
  constructor
  · rintro ⟨Z, ⟨_, X, hX, hsub⟩, ?, rfl, hval⟩
    obtain ⟨τ, rfl⟩ := x.sub hX
    rw [prepend_cone] at hsub
    exact ⟨τ, hX, valElt_scan_mono (cone_subset_cone.mp hsub) Y hval⟩
  · rintro ⟨τ, hτ, hval⟩
    exact ⟨cone (σ ++ τ), ⟨memB_cone _, cone τ, hτ, (prepend_cone σ τ).le⟩, σ ++ τ, rfl,
     hval⟩
end

section

theorem scan_append_falseFalse (τ : Str) : scan ([false, false] ++ τ) = scan τ := by
  show scan (false :: false :: τ) = scan τ
  cases h : scan τ with
  | none => simp [scan_false, h]
  | some b => simp [scan_false, h, Bool.not_not]
end

section

theorem scan_append_falseTrue (τ : Str) : scan ([false, true] ++ τ) = some false := by
```

```
  show scan (false :: true :: τ) = some false
  simp [scan_false, scan_true]
end

section

theorem scan_append_true (τ : Str) : scan ([true] ++ τ) = some true :=
  scan_true τ
end

end DomainTheory.NeighbourhoodSystems.Example23
```

3.3.5 Example 2.4 — erase a run of ones

Example_2_4.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_17

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Example24
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ExampleB

section

def runMap : ApproximableMap B B where
  rel X Y := ∃ σ, X = cone σ ∧ B.mem Y ∧ cone (out σ) ⊆ Y
  rel_dom := fun ⟨σ, hX, _, _⟩ => ⟨σ, hX⟩
  rel_cod := fun ⟨_, _, hYmem, _⟩ => hYmem
  master_rel := by
    refine ⟨[], (B_master).trans cone_nil.symm, B.master_mem, ?_⟩
    rw [out_nil, B_master, cone_nil]
  inter_right := by
    rintro X Y Y' ⟨σ, hX, hYmem, hYsub⟩ ⟨σ', hX', hY'mem, hY'sub⟩
    have hσ : σ = σ' := cone_injective (hX ▶ hX')
    subst hσ
    have hsub : cone (out σ) ⊆ Y ∩ Y' := Set.subset_inter hYsub hY'sub
    exact ⟨σ, hX, B.inter_mem hYmem hY'mem (memB_cone (out σ)) hsub, hsub⟩
  mono := by
    rintro X X' Y Y' ⟨σ, hX, _, hYsub⟩ hX'X hYY' hX'mem hY'mem
    obtain ⟨σ', hX'cone⟩ := hX'mem
    have hpre : σ <+: σ' := by
      apply cone_subset_cone.mp
      rw [← hX'cone, ← hX]; exact hX'X
    have hcone : cone (out σ') ⊆ cone (out σ) := cone_subset_cone.mpr (out_mono hpre)
    exact ⟨σ', hX'cone, hY'mem, (hcone.trans hYsub).trans hYY'⟩
end

section
```

```
theorem out_append_false (τ : Str) : out ([false] ++ τ) = false :: out τ := rfl
end

section

theorem out_append_trueFalse (τ : Str) : out ([true, false] ++ τ) = false :: τ := rfl
end

section

theorem out_append_trueTrue (τ : Str) : out ([true, true] ++ τ) = out ([true] ++ τ) :=
    rfl
end

section

theorem out_true_false (t : Str) : out (true :: false :: t) = false :: t := rfl
end

section

theorem out_true_true (t : Str) : out (true :: true :: t) = out (true :: t) := rfl
end

section

theorem key (g : ApproximableMap B B) (hg : SatisfiesRunEquations g) :
    ∀ σ : Str, g.toElementMap (sigmaElt σ B.bot) = sigmaElt (out σ) B.bot
  | [] => by
      rw [show out ([] : Str) = ([] : Str) from rfl, sigmaElt_nil]
      have hm := g.toElementMap_mono (B.bot_le (sigmaElt [true] B.bot))
      rw [hg.one] at hm
      exact le_antisymm hm (B.bot_le _)
  | [true] => by
      rw [show out [true] = ([] : Str) from rfl, sigmaElt_nil]
      exact hg.one
  | true :: false :: t => by
      rw [out_true_false, show (true :: false :: t : Str) = [true, false] ++ t from
    rfl,
        sigmaElt_append, hg.oneZero, ← sigmaElt_append]
      rfl
  | true :: true :: t => by
      rw [out_true_true, show (true :: true :: t : Str) = [true, true] ++ t from rfl,
        sigmaElt_append, hg.oneOne, ← sigmaElt_append]
      exact key g hg (true :: t)
  | false :: t => by
      rw [out_false, show (false :: t : Str) = [false] ++ t from rfl, sigmaElt_append,
     hg.zero,
        key g hg t, show (false :: out t : Str) = [false] ++ out t from rfl,
    sigmaElt_append]
end

section

theorem runMap_rel_cone (σ : Str) (Y : Set Str) :
    runMap.rel (cone σ) Y ↔ B.mem Y ∧ cone (out σ) ⊆ Y := by
```

```
  constructor
  · rintro ⟨?, h?, hYmem, hsub⟩
    obtain rfl : ? = σ := (cone_injective h?).symm
    exact ⟨hYmem, hsub⟩
  · rintro ⟨hYmem, hsub⟩
    exact ⟨σ, rfl, hYmem, hsub⟩
end

end DomainTheory.NeighbourhoodSystems.Example24
```

EXAMPLE 2.4. Let us briefly describe an approximable mapping $g : B \to B$. Informally, g can be said to "read a sequence from left to right and eliminate the first consecutive run of 1's while copying all the other digits as read." We will have

$$g(0^n 1^k 0x) = 0^{n+1}x$$

provided $k > 0$. (Here 1^k means a string of 1's of length k.) However, if 1^∞ is the infinite sequences of 1's, then

$$g(1^\infty) = \perp, \text{ and}$$
$$g(0^n 1^\infty) = 0^n.$$

This example is instructive, since it shows that a non-trivial mapping can transform a total element into a partial element. □

Aside from our being able to define particular functions outright, we can combine functions in many different ways; the idea of composition is probably the most basic scheme of combination, and there is a technical name for a family of structures with mappings that can be so combined.

3.3.6 Theorem 2.5 — category of approximable maps

THEOREM 2.5. The class of neighbourhood systems and approximable mappings form a *category*, where the identity mapping $I_D : D \to D$ relates $X, Y \in D$ as follows:

(i) $X\ I_D\ Y$ iff $X \subseteq Y$.

If $f : D_0 \to D_1$ and $g : D_1 \to D_2$ are given, then the *composition* $g \circ f : D_0 \to D_2$ relates $X \in D_0$ and $Z \in D_2$ as follows:

(ii) $X\ g \circ f\ Z$ iff $\exists Y \in D_1.\ X\ f\ Y$ and $Y\ g\ Z$.

Proof: (We may use MacLane [1971] as the standard reference on category theory, but we require hardly more than the basic definitions at this stage.) To check that we have a category, we need to know that the identity and composition maps really are maps in the category and that certain identity and associative laws hold. Now it is obvious that I_D satisfies 2.1 (i)-(iii). Moreover if $f : D_0 \to D_1$, all we have to prove is:

$$f \circ I_{D_0} = I_{D_1} \circ f = f$$

Checking one of these equations is enough. Thus, for $X \in D_0$ and $Z \in D_1$ we find

$$X\ f \circ I_{D_0}\ Z \text{ iff } \exists Y \in D_0.\ X \subseteq Y \text{ and } Y\ f\ Z$$
$$\text{iff } X\ f\ Z.$$

So, f and $f \circ I_{D_0}$ are the same mapping.

Suppose now that $f : D_0 \to D_1$ and $g : D_1 \to D_2$. We have to verify that $g \circ f$ is an approximable mapping. First off, there is no trouble in seeing that $\Delta_0\ g \circ f\ \Delta_2$ holds. Next, suppose that $X\ g \circ f\ Z$ and $X\ g \circ f\ Z'$ hold. Then we have $X\ f\ Y$ and $Y\ g\ Z$ for some choice of $Y \in D_1$. Also $X\ f\ Y'$ and $Y'\ g\ Z'$ hold for some choice of $Y' \in D_1$. By 2.1 (ii) it follows that $X\ f\ (Y \cap Y')$. Since $Y \cap Y' \subseteq Y$, we conclude $(Y \cap Y')\ g\ Z$ by 2.1 (iii); similarly $(Y \cap Y')\ g\ Z'$. Invoking 2.1 (ii) again, we obtain $(Y \cap Y')\ g\ (Z \cap Z')$, and $X\ g \circ f\ (Z \cap Z')$ is proved.

Suppose finally that $X' \subseteq X$, $X\ g \circ f\ Z$, and $Z \subseteq Z'$. Now $X\ f\ Y$ and $Y\ g\ Z$ for some $Y \in D_1$. But then $X'\ f\ Y$ holds; for a similar reason $Y\ g\ Z'$ holds also. Therefore, $X'\ g \circ f\ Z'$ is established, which means that we have checked 2.1 (iii) for $g \circ f$ and have completed the proof that $g \circ f : D_0 \to D_2$.

The verification of associativity is a purely logical deduction. Thus suppose that in addition to f and g we have $h : D_2 \to D_3$. If $X \in D_0$ and $W \in D_3$ we find

$$\begin{aligned} X\ h \circ (g \circ f)\ W &\text{ iff } \exists Z \in D_2.\ X\ g \circ f\ Z \text{ and } Z\ h\ W \\ &\text{iff } \exists Z \in D_2\ \exists Y \in D_1.\ X\ f\ Y \text{ and } Y\ g\ Z \text{ and } Z\ h\ W \\ &\text{iff } \exists Y \in D_1\ \exists Z \in D_2.\ X\ f\ Y \text{ and } Y\ g\ Z \text{ and } Z\ h\ W \\ &\text{iff } \exists Y \in D_1.\ X\ f\ Y \text{ and } Y\ (h \circ g)\ W \\ &\text{iff } X\ (h \circ g) \circ f\ W. \end{aligned}$$

So, as relations, $h \circ (g \circ f) = (h \circ g) \circ f$. □

It may seem as though we have, in the definition of composition, written things backwards. But the reason is that when mappings are taken as elementwise functions, then the order is preserved in expressions involving the usual function value notation. We have, for example:

Theorem_2_5.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_2

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

namespace ApproximableMap

section
variable {α β ? ? : Type*}

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

def idMap (V : NeighborhoodSystem α) : ApproximableMap V V where
  rel X Y := V.mem X ∧ V.mem Y ∧ X ⊆ Y
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨V.master_mem, V.master_mem, subset_rfl⟩
  inter_right := by
    rintro X Y Y' ⟨hX, hY, hXY⟩ ⟨_, hY', hXY'⟩
```

```
    exact ⟨hX, V.inter_mem hY hY' hX (Set.subset_inter hXY hXY'), Set.subset_inter hXY
    hXY'⟩
  mono := by
    rintro X X' Y Y' ⟨_, _, hXY⟩ hX'X hYY' hX' hY'
    exact ⟨hX', hY', (hX'X.trans hXY).trans hYY'⟩

@[simp] theorem idMap_rel {V : NeighborhoodSystem α} {X Y : Set α} :
    (idMap V).rel X Y ↔ V.mem X ∧ V.mem Y ∧ X ⊆ Y := Iff.rfl

def comp (g : ApproximableMap V₁ V₂) (f : ApproximableMap V₀ V₁) : ApproximableMap V₀ V₂
    where
  rel X Z := ∃ Y, f.rel X Y ∧ g.rel Y Z
  rel_dom := fun ⟨_, hXY, _⟩ => f.rel_dom hXY
  rel_cod := fun ⟨_, _, hYZ⟩ => g.rel_cod hYZ
  master_rel := ⟨V₁.master, f.master_rel, g.master_rel⟩
  inter_right := by
    rintro X Z Z' ⟨Y, hXY, hYZ⟩ ⟨Y', hXY', hY'Z'⟩
    refine ⟨Y ∩ Y', f.inter_right hXY hXY', ?_⟩
    have hYY'mem : V₁.mem (Y ∩ Y') := f.rel_cod (f.inter_right hXY hXY')
    have h1 : g.rel (Y ∩ Y') Z :=
      g.mono hYZ Set.inter_subset_left subset_rfl hYY'mem (g.rel_cod hYZ)
    have h2 : g.rel (Y ∩ Y') Z' :=
      g.mono hY'Z' Set.inter_subset_right subset_rfl hYY'mem (g.rel_cod hY'Z')
    exact g.inter_right h1 h2
  mono := by
    rintro X X' Z Z' ⟨Y, hXY, hYZ⟩ hX'X hZZ' hX' hZ'
    refine ⟨Y, f.mono hXY hX'X subset_rfl hX' (f.rel_cod hXY), ?_⟩
    exact g.mono hYZ subset_rfl hZZ' (g.rel_dom hYZ) hZ'

@[simp] theorem comp_rel {g : ApproximableMap V₁ V₂} {f : ApproximableMap V₀ V₁} {X :
    Set α}
    {Z : Set ?} : (g.comp f).rel X Z ↔ ∃ Y, f.rel X Y ∧ g.rel Y Z := Iff.rfl

@[simp] theorem toElementMap_idMap (x : V₀.Element) : (idMap V₀).toElementMap x = x :=
    by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨X, hXx, _, hY, hXY⟩
    exact x.up_mem hXx hY hXY
  · intro hY
    exact ⟨Y, hY, x.sub hY, x.sub hY, subset_rfl⟩

theorem comp_assoc {V₃ : NeighborhoodSystem ?} (h : ApproximableMap V₂ V₃)
    (g : ApproximableMap V₁ V₂) (f : ApproximableMap V₀ V₁) :
    (h.comp g).comp f = h.comp (g.comp f) := by
  apply ApproximableMap.ext
  intro X W
  constructor
  · rintro ⟨Y, hXY, Z, hYZ, hZW⟩
    exact ⟨Z, ⟨Y, hXY, hYZ⟩, hZW⟩
  · rintro ⟨Z, ⟨Y, hXY, hYZ⟩, hZW⟩
    exact ⟨Y, hXY, Z, hYZ, hZW⟩

theorem comp_idMap (f : ApproximableMap V₀ V₁) : f.comp (idMap V₀) = f := by
  apply ApproximableMap.ext
```

```
  intro X Z
  constructor
  · rintro ⟨Y, ⟨hX, _, hXY⟩, hYZ⟩
    exact f.mono hYZ hXY subset_rfl hX (f.rel_cod hYZ)
  · intro hXZ
    exact ⟨X, ⟨f.rel_dom hXZ, f.rel_dom hXZ, subset_rfl⟩, hXZ⟩

theorem idMap_comp (f : ApproximableMap V₀ V₁) : (idMap V₁).comp f = f := by
  apply ApproximableMap.ext
  intro X Z
  constructor
  · rintro ⟨Y, hXY, _, hZ, hYZ⟩
    exact f.mono hXY subset_rfl hYZ (f.rel_dom hXY) hZ
  · intro hXZ
    exact ⟨Z, hXZ, f.rel_cod hXZ, f.rel_cod hXZ, subset_rfl⟩
end

end ApproximableMap

end DomainTheory.NeighbourhoodSystems
```

3.3.7 Proposition 2.6 — identity and composition

PROPOSITION 2.6. Given $f : D_0 \to D_1$ and $g : D_1 \to D_2$, the following equations hold:

(i) $I_{D_0}(x) = x$, and

(ii) $(g \circ f)(x) = g(f(x))$,

for all $x \in |D_0|$. □

The proof is not troublesome and is left as an exercise. In technical language the result shows that the category defined in Theorem 2.5 is equivalent to a "concrete category" of sets and functions, namely the domains and elementwise transformations of 2.2.

Toward the end of the last lecture (see 1.9) we promised to show that isomorphisms of domains always come from approximable mappings, and this we now do. It means that the category contains all the isomorphisms it should have.

Proposition_2_6.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Theorem_2_5
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

section
variable {α β ? ? : Type*}

namespace ApproximableMap
```

```
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

theorem toElementMap_comp (g : ApproximableMap V₁ V₂) (f : ApproximableMap V₀ V₁) (x :
    V₀.Element) :
    (g.comp f).toElementMap x = g.toElementMap (f.toElementMap x) := by
  apply Element.ext
  intro Z
  constructor
  · rintro ⟨X, hXx, Y, hXY, hYZ⟩
    exact ⟨Y, ⟨X, hXx, hXY⟩, hYZ⟩
  · rintro ⟨Y, ⟨X, hXx, hXY⟩, hYZ⟩
    exact ⟨X, hXx, Y, hXY, hYZ⟩

theorem commute_apply {V : NeighborhoodSystem α} {f g : ApproximableMap V V}
    (hcomm : f.comp g = g.comp f) (x : V.Element) :
    f.toElementMap (g.toElementMap x) = g.toElementMap (f.toElementMap x) := by
  have h1 : (f.comp g).toElementMap x = (g.comp f).toElementMap x := by rw [hcomm]
  rwa [toElementMap_comp, toElementMap_comp] at h1

end ApproximableMap
end

end DomainTheory.NeighbourhoodSystems
```

3.3.8 Theorem 2.7 — isomorphisms are approximable

THEOREM 2.7. Every isomorphism between domains results from an approximable mapping between the neighbourhood systems. Moreover, finite elements are always transformed into finite elements.

Proof: Suppose that $f : |D_0| \to |D_1|$ is a one-one, inclusion-preserving function defined on elements, where the range of the function is the whole of $|D_1|$, of course. Taking the hint from 2.2, there is only one way we could define a neighbourhood mapping; namely, we consider the relation $Y \in f(\uparrow X)$ for $X \in D_0$ and $Y \in D_1$. What has to be shown is that this is an approximable mapping which determines the original function via the formula 2.2 (i).

The first part is easy; indeed, there is a general result that monotone functions on finite elements of one domain to arbitrary elements of another domain always determine approximable mappings (cf. Exercise 2.8). What remains, then, is to show that the relation re-defines the function. This comes down to showing that for $x \in |D_0|$

$$f(x) = \{Y \in D_1 \mid \exists X \in x.\, Y \in f(\uparrow X)\}.$$

Consider the right-hand side of this equation: it is a filter. (This either can be proved directly or Exercise 2.11 can be used.) Because f is an onto-function, we can call the right-hand side $f(x')$ for some $x' \in |D_0|$. But since $X \in x$ implies $\uparrow X \subseteq x$ and $f(\uparrow X) \subseteq f(x)$, the right-hand side is included in the left-hand side. In other words $f(x') \subseteq f(x)$. But, since f is an isomorphism, $x' \subseteq x$ follows.

In the other direction, if $X \in x$, then $f(\uparrow X) \subseteq f(x')$ holds by definition, so $\uparrow X \subseteq x'$. This implies $X \in x'$; and, as X is arbitrary, $x \subseteq x'$. So $x = x'$, and $f(x) = f(x')$ as desired.

Finally, consider any finite element $\uparrow X \in |D_0|$, where $X \in D_0$. What we have to show is that $f(\uparrow X)$ is finite in $|D_1|$. Because f is an isomorphism, we can associate uniquely to every $Y \in f(\uparrow X)$ an element $y_Y \subseteq \uparrow X$ in $|D_0|$ where $f(y_Y) = \uparrow Y$. (Just apply the inverse of the function f.) Define

$$z = \bigcup \{y_Y \mid Y \in f(\uparrow X)\}.$$

Because $Y' \subseteq Y$ always implies $y_{Y'} \subseteq y_Y$ and each $y_Y \in |D_0|$, it is easy to show z is a filter and hence is in $|D_0|$ also (cf. Exercise 2.11). Because each $y_Y \subseteq\uparrow X$, then $z \subseteq\uparrow X$, too. But each $y_Y \subseteq z$, so $\uparrow Y = f(y_Y) \subseteq f(z)$ and hence $Y \in f(z)$. As this holds for all $Y \in f(\uparrow X)$, the inclusion $f(\uparrow X) \subseteq f(z)$ follows, as well as $\uparrow X \subseteq z$. Therefore, $z =\uparrow X$ and so $X \in z$. But then $X \in y_Y$ for some $Y \in f(\uparrow X)$, by definition of z. Since $\uparrow X \subseteq y_Y$, we obtain $f(\uparrow X) \subseteq\uparrow Y$, but of course the opposite inclusion is also true from the choice of Y. This means that $f(\uparrow X) =\uparrow Y$ is finite in $|D_1|$ as claimed. We can apply the same argument to the inverse function; and, thus, the finite elements of $|D_0|$ and $|D_1|$ are in a one-one inclusion-preserving correspondence under the isomorphism. □

Theorem_2_7.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_2
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7
public import Mathlib.Order.Hom.Basic
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

namespace ApproximableMap

section
variable {α β ? ? : Type*}

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

def ofIso (e : V₀.Element ≃o V₁.Element) : ApproximableMap V₀ V₁ where
  rel X Y := ∃ _ : V₀.mem X, (e (V₀.principal ?V₀.mem X?)).mem Y
  rel_dom := fun h => h.1
  rel_cod := fun h => (e _).sub h.2
  master_rel := ⟨V₀.master_mem, (e _).master_mem⟩
  inter_right := by
    rintro X Y Y' ⟨hX, hY⟩ ⟨_, hY'⟩
    exact ⟨hX, (e (V₀.principal hX)).inter_mem hY hY'⟩
  mono := by
    rintro X X' Y Y' ⟨hX, hY⟩ hX'X hYY' hX' hY'
    refine ⟨hX', ?_⟩
    have hle : V₀.principal hX ≤ V₀.principal hX' := (V₀.principal_le_iff hX hX').mpr
    hX'X
    have hmem : (e (V₀.principal hX')).mem Y := (e.monotone hle) Y hY
    exact (e (V₀.principal hX')).up_mem hmem hY' hYY'

theorem exists_principal_eq_apply_principal (e : V₀.Element ≃o V₁.Element)
    {X : Set α} (hX : V₀.mem X) :
    ∃ (Y : Set β) (hY : V₁.mem Y), e (V₀.principal hX) = V₁.principal hY := by

  set w : V₁.Element := e (V₀.principal hX) with hw
  set S : Set V₀.Element :=
```

```
    {z | ∃ (Y : Set β) (hY : V₁.mem Y), w.mem Y ∧ z = e.symm (V₁.principal hY)} with hS

  have hsymm_w : e.symm w = V₀.principal hX := by rw [hw, e.symm_apply_apply]

  have hprin_le_w : ∀ {Y : Set β} (hY : V₁.mem Y), w.mem Y → V₁.principal hY ≤ w :=
    fun hY hYw Z hZ => w.up_mem hYw hZ.1 hZ.2

  have hne : S.Nonempty :=
    ⟨e.symm (V₁.principal V₁.master_mem), V₁.master, V₁.master_mem, w.master_mem, rfl⟩

  have hdir : ∀ a ∈ S, ∀ b ∈ S, ∃ c ∈ S, a ≤ c ∧ b ≤ c := by
    rintro a ⟨Y, hY, hYw, rfl⟩ b ⟨Y', hY', hY'w, rfl⟩
    have hYY'w : w.mem (Y ∩ Y') := w.inter_mem hYw hY'w
    have hYY' : V₁.mem (Y ∩ Y') := w.sub hYY'w
    refine ⟨e.symm (V₁.principal hYY'), ⟨Y ∩ Y', hYY', hYY'w, rfl⟩, ?_, ?_⟩
    · exact e.symm.monotone ((V₁.principal_le_iff hY hYY').mpr Set.inter_subset_left)
    · exact e.symm.monotone ((V₁.principal_le_iff hY' hYY').mpr Set.inter_subset_right)

  set z : V₀.Element := V₀.sSupDirected S hne hdir with hz

  have hz_le : z ≤ V₀.principal hX := by
    apply V₀.sSupDirected_le
    rintro s ⟨Y, hY, hYw, rfl⟩
    have : e.symm (V₁.principal hY) ≤ e.symm w := e.symm.monotone (hprin_le_w hY hYw)
    rwa [hsymm_w] at this

  have hw_le_ez : w ≤ e z := by
    intro Y hYw
    have hY : V₁.mem Y := w.sub hYw
    have hmem_S : e.symm (V₁.principal hY) ∈ S := ⟨Y, hY, hYw, rfl⟩
    have h1 : e.symm (V₁.principal hY) ≤ z := V₀.le_sSupDirected S hne hdir hmem_S
    have h2 : V₁.principal hY ≤ e z := by
      have := e.monotone h1
      rwa [e.apply_symm_apply] at this
    exact h2 Y ⟨hY, subset_rfl⟩
  have hX_le_z : V₀.principal hX ≤ z := by
    have : e.symm w ≤ e.symm (e z) := e.symm.monotone hw_le_ez
    rwa [hsymm_w, e.symm_apply_apply] at this

  have hz_eq : z = V₀.principal hX := le_antisymm hz_le hX_le_z
  have hXz : z.mem X := hz_eq ▸ ⟨hX, subset_rfl⟩
  obtain ⟨s, ⟨Y, hY, hYw, rfl⟩, hXs⟩ := hXz

  refine ⟨Y, hY, ?_⟩
  have hprinX_le : V₀.principal hX ≤ e.symm (V₁.principal hY) :=
    fun Z hZ => (e.symm (V₁.principal hY)).up_mem hXs hZ.1 hZ.2
  have hw_le_prinY : w ≤ V₁.principal hY := by
    have := e.monotone hprinX_le
    rw [e.apply_symm_apply] at this
    rwa [← hw] at this
  exact le_antisymm hw_le_prinY (hprin_le_w hY hYw)

theorem toElementMap_ofIso (e : V₀.Element ≃o V₁.Element) (x : V₀.Element) :
    (ofIso e).toElementMap x = e x := by
  have hgxle : (ofIso e).toElementMap x ≤ e x := by
    rintro Y ⟨X, hXx, hX, hY⟩
```

```
    have hpx : V₀.principal hX ≤ x := fun Z hZ => x.up_mem hXx hZ.1 hZ.2
    exact (e.monotone hpx) Y hY
  have key : x = e.symm ((ofIso e).toElementMap x) := by
    apply le_antisymm
    · intro X hXx
      have hX : V₀.mem X := x.sub hXx
      have hsub : e (V₀.principal hX) ≤ (ofIso e).toElementMap x :=
        fun Y hY => ⟨X, hXx, hX, hY⟩
      have hple : V₀.principal hX ≤ e.symm ((ofIso e).toElementMap x) := by
        have h := e.symm.monotone hsub
        rwa [e.symm_apply_apply] at h
      exact hple X ⟨hX, subset_rfl⟩
    · have h := e.symm.monotone hgxle
      rwa [e.symm_apply_apply] at h
  have h1 : e x = e (e.symm ((ofIso e).toElementMap x)) := congrArg e key
  rw [e.apply_symm_apply] at h1
  exact h1.symm

theorem exists_approximable_of_iso (e : V₀.Element ≃o V₁.Element) :
    ∃ f : ApproximableMap V₀ V₁, ∀ x, f.toElementMap x = e x :=
  ⟨ofIso e, toElementMap_ofIso e⟩
end

end ApproximableMap

end DomainTheory.NeighbourhoodSystems
```

3.3.9 Lecture II exercises

EXERCISES

3.3.10 Exercise 2.8 — determined by finite elements

With reference to the proof of 2.2 show that an approximable mapping is uniquely determined by its elementwise effect on finite elements. Moreover any arbitrary monotone function on finite elements of $|D_0|$ with values in $|D_1|$ comes from an approximable $f : D_0 \to D_1$.

Exercise_2_8.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_2
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

namespace ApproximableMap

section
variable {α β ? : Type*}

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}
```

```
def ofMono (m : (X : Set α) → V₀.mem X → V₁.Element)
    (hmono : ∀ (X X' : Set α) (hX : V₀.mem X) (hX' : V₀.mem X'), X' ⊆ X → m X hX ≤ m X
    ' hX') :
    ApproximableMap V₀ V₁ where
  rel X Y := ∃ hX : V₀.mem X, (m X hX).mem Y
  rel_dom := fun ⟨hX, _⟩ => hX
  rel_cod := fun ⟨hX, hY⟩ => (m _ hX).sub hY
  master_rel := ⟨V₀.master_mem, (m _ V₀.master_mem).master_mem⟩
  inter_right := by
    rintro X Y Y' ⟨hX, hY⟩ ⟨_, hY'⟩
    exact ⟨hX, (m X hX).inter_mem hY hY'⟩
  mono := by
    rintro X X' Y Y' ⟨hX, hY⟩ hX'X hYY' hX' hY'
    have hle : m X hX ≤ m X' hX' := hmono X X' hX hX' hX'X
    exact ⟨hX', (m X' hX').up_mem (hle Y hY) hY' hYY'⟩

theorem eq_of_toElementMap_principal {f g : ApproximableMap V₀ V₁}
    (h : ∀ (X : Set α) (hX : V₀.mem X),
      f.toElementMap (V₀.principal hX) = g.toElementMap (V₀.principal hX)) : f = g :=
    by
  apply ApproximableMap.ext
  intro X Y
  by_cases hX : V₀.mem X
  · rw [f.rel_iff_mem_principal hX, g.rel_iff_mem_principal hX, h X hX]
  · constructor
    · intro hr; exact absurd (f.rel_dom hr) hX
    · intro hr; exact absurd (g.rel_dom hr) hX

theorem toElementMap_ofMono_principal
    (m : (X : Set α) → V₀.mem X → V₁.Element)
    (hmono : ∀ (X X' : Set α) (hX : V₀.mem X) (hX' : V₀.mem X'), X' ⊆ X → m X hX ≤ m X
    ' hX')
    (X : Set α) (hX : V₀.mem X) :
    (ofMono m hmono).toElementMap (V₀.principal hX) = m X hX := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨Z, ⟨hZmem, hXZ⟩, hZ', hmY⟩
    have hle : m Z hZ' ≤ m X hX := hmono Z X hZ' hX hXZ
    exact hle Y hmY
  · intro hmY
    exact ⟨X, ⟨hX, subset_rfl⟩, hX, hmY⟩
end

end ApproximableMap

end DomainTheory.NeighbourhoodSystems
```

3.3.11 Exercise 2.9 — directed union formula

Prove that if $f : D_0 \to D_1$ is an approximable mapping, then the elementwise mapping $f : |D_0| \to |D_1|$ satisfies the equation

$$f(x) = \bigcup \{ f(\uparrow X) \mid X \in x \}$$

for all $x \in |D_0|$. Conversely, show that every elementwise function satisfying this equation comes from an approximable mapping as defined in 2.2.

Exercise_2_9.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_2
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

section
variable {α β ? : Type*}

namespace ApproximableMap

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

theorem toElementMap_mem_iff_principal (f : ApproximableMap V₀ V₁) (x : V₀.Element) {Y
    : Set β} :
    (f.toElementMap x).mem Y ↔
      ∃ (X : Set α) (hx : x.mem X), (f.toElementMap (V₀.principal (x.sub hx))).mem Y :=
    by
  rw [mem_toElementMap]
  constructor
  · rintro ⟨X, hxX, hrel⟩
    exact ⟨X, hxX, (f.rel_iff_mem_principal (x.sub hxX)).mp hrel⟩
  · rintro ⟨X, hxX, hmem⟩
    exact ⟨X, hxX, (f.rel_iff_mem_principal (x.sub hxX)).mpr hmem⟩

end ApproximableMap
end

end DomainTheory.NeighbourhoodSystems
```

3.3.12 Exercise 2.10 — intersection of two maps

Carry out the proof of Proposition 2.6; and in addition show that, if $f, g : D_0 \to D_1$ are two approximable mappings, there exists $h : D_0 \to D_1$ such that

$$h(x) = f(x) \cap g(x)$$

for all $x \in |D_0|$.

Exercise_2_10.lean

```
module
```

```
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_2
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

namespace ApproximableMap

section
variable {α β ? : Type*}

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

def interMap (f g : ApproximableMap V₀ V₁) : ApproximableMap V₀ V₁ where
  rel X Z := f.rel X Z ∧ g.rel X Z
  rel_dom h := f.rel_dom h.1
  rel_cod h := f.rel_cod h.1
  master_rel := ⟨f.master_rel, g.master_rel⟩
  inter_right := fun ⟨hf, hg⟩ ⟨hf', hg'⟩ => ⟨f.inter_right hf hf', g.inter_right hg hg'⟩
  mono := fun ⟨hf, hg⟩ hX'X hZZ' hX' hZ' =>
    ⟨f.mono hf hX'X hZZ' hX' hZ', g.mono hg hX'X hZZ' hX' hZ'⟩

theorem mem_toElementMap_interMap (f g : ApproximableMap V₀ V₁) (x : V₀.Element) {Z :
    Set β} :
    ((interMap f g).toElementMap x).mem Z ↔
      (f.toElementMap x).mem Z ∧ (g.toElementMap x).mem Z := by
  constructor
  · rintro ⟨X, hxX, hf, hg⟩
    exact ⟨⟨X, hxX, hf⟩, ⟨X, hxX, hg⟩⟩
  · rintro ⟨⟨X, hxX, hf⟩, ⟨X', hxX', hg⟩⟩
    have hxXX' : x.mem (X ∩ X') := x.inter_mem hxX hxX'
    have hXX' : V₀.mem (X ∩ X') := x.sub hxXX'
    refine ⟨X ∩ X', hxXX', ?_, ?_⟩
    · exact f.mono hf Set.inter_subset_left subset_rfl hXX' (f.rel_cod hf)
    · exact g.mono hg Set.inter_subset_right subset_rfl hXX' (g.rel_cod hg)
end

end ApproximableMap

end DomainTheory.NeighbourhoodSystems
```

3.3.13 Exercise 2.11 — directed unions of elements

Let $(I, \leq)$ be a non-empty abstract partially ordered set; suppose it is directed in the sense that whenever $i, j \in I$, then $i \leq k$ and $j \leq k$ for some $k \in I$. Suppose that $a : I \to |D|$ is such that

$$i \leq j \text{ implies } a_i \subseteq a_j$$

for all $i, j \in I$. Prove that

$$\bigcup \{a_i \mid i \in I\}$$

is always a filter in $|D|$. (Note the ways this lemma could be used in the proof of 2.7; but be careful in defining the partially ordered set and do not confuse $\subseteq$ and $\supseteq$.) In words we could say that the domain of filters is closed under directed unions. Prove also that if $f : D \to D'$ is an approximable mapping, then for any directed union

$$f(\bigcup\{a_i \mid i \in I\}) = \bigcup\{f(a_i) \mid i \in I\};$$

that is, approximable mappings always preserve directed unions. If an elementwise function preserves directed unions, must it come from an approximable mapping? (Hint: Invoke 2.9.)

Exercise_2_11.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_2
public import Mathlib.Data.Set.Operations
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

namespace NeighborhoodSystem

section
variable {α β ? : Type*}

def iSupDirected {α : Type*} {V : NeighborhoodSystem α} {I : Type*} [Nonempty I]
    (a : I → V.Element) (hdir : ∀ i j, ∃ k, a i ≤ a k ∧ a j ≤ a k) : V.Element :=
  V.sSupDirected (Set.range a) (Set.range_nonempty a) (by
    rintro _ ⟨i, rfl⟩ _ ⟨j, rfl⟩
    obtain ⟨k, hik, hjk⟩ := hdir i j
    exact ⟨a k, ⟨k, rfl⟩, hik, hjk⟩)

theorem mem_iSupDirected {α : Type*} {V : NeighborhoodSystem α} {I : Type*} [Nonempty
    I]
    (a : I → V.Element) (hdir : ∀ i j, ∃ k, a i ≤ a k ∧ a j ≤ a k) {Z : Set α} :
    (iSupDirected a hdir).mem Z ↔ ∃ i, (a i).mem Z := by
  constructor
  · rintro ⟨s, ⟨i, rfl⟩, hsZ⟩; exact ⟨i, hsZ⟩
  · rintro ⟨i, hi⟩; exact ⟨a i, ⟨i, rfl⟩, hi⟩

theorem iSupDirected_le {α : Type*} {V : NeighborhoodSystem α} {I : Type*} [Nonempty I
    ]
    (a : I → V.Element) (hdir : ∀ i j, ∃ k, a i ≤ a k ∧ a j ≤ a k) {y : V.Element}
    (hy : ∀ i, a i ≤ y) : iSupDirected a hdir ≤ y := by
  intro Z hZ
  obtain ⟨i, hi⟩ := (mem_iSupDirected a hdir).mp hZ
  exact hy i Z hi

theorem le_iSupDirected {α : Type*} {V : NeighborhoodSystem α} {I : Type*} [Nonempty I
    ]
    (a : I → V.Element) (hdir : ∀ i j, ∃ k, a i ≤ a k ∧ a j ≤ a k) (i : I) :
    a i ≤ iSupDirected a hdir :=
  fun _ hZ => (mem_iSupDirected a hdir).mpr ⟨i, hZ⟩
end
```

```
end NeighborhoodSystem

section
variable {α β ? : Type*}

namespace ApproximableMap

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

theorem toElementMap_iSupDirected (f : ApproximableMap V₀ V₁) {I : Type*} [Nonempty I]
    (a : I → V₀.Element) (hdir : ∀ i j, ∃ k, a i ≤ a k ∧ a j ≤ a k) :
    f.toElementMap (NeighborhoodSystem.iSupDirected a hdir) =
      NeighborhoodSystem.iSupDirected (fun i => f.toElementMap (a i))
        (fun i j => by
          obtain ⟨k, hik, hjk⟩ := hdir i j
          exact ⟨k, f.toElementMap_mono hik, f.toElementMap_mono hjk⟩) := by
  apply Element.ext
  intro Y
  rw [mem_toElementMap, NeighborhoodSystem.mem_iSupDirected]
  constructor
  · rintro ⟨X, hX, hrel⟩
    obtain ⟨i, hi⟩ := (NeighborhoodSystem.mem_iSupDirected a hdir).mp hX
    exact ⟨i, X, hi, hrel⟩
  · rintro ⟨i, X, hi, hrel⟩
    exact ⟨X, (NeighborhoodSystem.mem_iSupDirected a hdir).mpr ⟨i, hi⟩, hrel⟩

end ApproximableMap
end

end DomainTheory.NeighbourhoodSystems
```

3.3.14 Exercise 2.12 — directed unions of maps

Suppose $(I, \leq)$ is a directed, partially ordered set and $f_i : D_0 \to D_1$ is a family of approximable mappings indexed by $i \in I$, where we assume

$$i \leq j \text{ implies } f_i(x) \subseteq f_j(x)$$

for all $i, j \in I$ and all $x \in |D_0|$. Prove that there is an approximable mapping $g : D_0 \to D_1$ where

$$g(x) = \bigcup \{f_i(x) \mid i \in I\}$$

for all $x \in |D_0|$.

Exercise_2_12.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_2
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
```

```
open NeighborhoodSystem

namespace ApproximableMap

section
variable {α β ? : Type*}

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

def iSupMap {I : Type*} [Nonempty I] (f : I → ApproximableMap V₀ V₁)
    (hdir : ∀ i j, ∃ k, (∀ X Y, (f i).rel X Y → (f k).rel X Y) ∧
      (∀ X Y, (f j).rel X Y → (f k).rel X Y)) : ApproximableMap V₀ V₁ where
  rel X Z := ∃ i, (f i).rel X Z
  rel_dom := fun ⟨i, h⟩ => (f i).rel_dom h
  rel_cod := fun ⟨i, h⟩ => (f i).rel_cod h
  master_rel := by obtain ⟨i⟩ := (inferInstance : Nonempty I); exact ⟨i, (f i).
    master_rel⟩
  inter_right := by
    rintro X Z Z' ⟨i, hi⟩ ⟨j, hj⟩
    obtain ⟨k, hik, hjk⟩ := hdir i j
    exact ⟨k, (f k).inter_right (hik X Z hi) (hjk X Z' hj)⟩
  mono := by
    rintro X X' Z Z' ⟨i, hi⟩ hX'X hZZ' hX' hZ'
    exact ⟨i, (f i).mono hi hX'X hZZ' hX' hZ'⟩

theorem mem_toElementMap_iSupMap {I : Type*} [Nonempty I] (f : I → ApproximableMap V₀
    V₁)
    (hdir : ∀ i j, ∃ k, (∀ X Y, (f i).rel X Y → (f k).rel X Y) ∧
      (∀ X Y, (f j).rel X Y → (f k).rel X Y)) (x : V₀.Element) {Y : Set β} :
    ((iSupMap f hdir).toElementMap x).mem Y ↔ ∃ i, ((f i).toElementMap x).mem Y := by
  constructor
  · rintro ⟨X, hxX, i, hrel⟩
    exact ⟨i, X, hxX, hrel⟩
  · rintro ⟨i, X, hxX, hrel⟩
    exact ⟨X, hxX, i, hrel⟩
end

end ApproximableMap

end DomainTheory.NeighbourhoodSystems
```

3.3.15 Exercise 2.13 — approximable means continuous

Exercise_2_13.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_17b

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_9
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_8
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_11
```

```
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_22
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

namespace ApproximableMap

section
open NeighborhoodSystem
universe u
variable {α : Type u} {β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem
    β}

def ofContinuous (c : V₀.Element → V₁.Element) (hc : Continuous c) : ApproximableMap V₀
     V₁ :=
  ofMono (fun _X hX => c (V₀.principal hX))
    (fun _X _X' hX hX' hX'X =>
      NeighborhoodSystem.continuous_monotone hc ((V₀.principal_le_iff hX hX').mpr hX'X)
    )

theorem continuous_toElementMap (f : ApproximableMap V₀ V₁) :
    Continuous (fun x => f.toElementMap x) := by
  rw [continuous_def]
  intro U hU
  show V₀.OpenFilter _
  constructor
  intro x hx
  obtain ⟨Y, hY, hYU⟩ := hU.out (f.toElementMap x) hx
  obtain ⟨X, hxX, hrel⟩ := hY
  exact ⟨X, hxX, fun x' hx' => hYU ⟨X, hx', hrel⟩⟩

end

end ApproximableMap

namespace NeighborhoodSystem

section
open NeighborhoodSystem
universe u
variable {α : Type u} {β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem
    β}

theorem mem_iff_principal_of_continuous {c : V₀.Element → V₁.Element} (hc : Continuous
     c)
    (x : V₀.Element) {Y : Set β} :
    (c x).mem Y ↔ ∃ (X : Set α) (hx : x.mem X), (c (V₀.principal (x.sub hx))).mem Y :=
     by
  constructor
  · intro hY
    have hxpre : x ∈ c ^-1' V₁.basicOpen Y := hY
    have hopen : IsOpen (c ^-1' V₁.basicOpen Y) := (V₁.isOpen_basicOpen Y).preimage hc
    obtain ⟨X, hxX, hXU⟩ := hopen.out x hxpre
```

```
    refine ⟨X, hxX, ?_⟩
    exact hXU (show V₀.principal (x.sub hxX) ∈ V₀.basicOpen X from ⟨x.sub hxX,
    subset_rfl⟩)
  · rintro ⟨X, hxX, hY⟩
    have hple : V₀.principal (x.sub hxX) ≤ x := fun Z hZ => x.up_mem hxX hZ.1 hZ.2
    exact (continuous_monotone hc hple) Y hY

theorem principalFamily_directed (x : V₀.Element) :
    ∀ i j : {X : Set α // x.mem X}, ∃ k : {X : Set α // x.mem X},
      V₀.principal (x.sub i.2) ≤ V₀.principal (x.sub k.2) ∧
        V₀.principal (x.sub j.2) ≤ V₀.principal (x.sub k.2) :=
  fun i j => ⟨⟨i.1 ∩ j.1, x.inter_mem i.2 j.2⟩,
    (V₀.principal_le_iff (x.sub i.2) (x.sub (x.inter_mem i.2 j.2))).mpr Set.
    inter_subset_left,
    (V₀.principal_le_iff (x.sub j.2) (x.sub (x.inter_mem i.2 j.2))).mpr Set.
    inter_subset_right⟩

theorem eq_iSupDirected_principal (x : V₀.Element) :
    x = iSupDirected (fun i : {X : Set α // x.mem X} => V₀.principal (x.sub i.2))
      (principalFamily_directed x) := by
  apply Element.ext
  intro Z
  rw [mem_iSupDirected]
  constructor
  · intro hZ; exact ⟨⟨Z, hZ⟩, (V₀.mem_principal _).mpr ⟨x.sub hZ, subset_rfl⟩⟩
  · rintro ⟨⟨X, hX⟩, hZ'⟩
    obtain ⟨hZmem, hXZ⟩ := (V₀.mem_principal _).mp hZ'
    exact x.up_mem hX hZmem hXZ

theorem continuous_of_monotone_iSupDirected {c : V₀.Element → V₁.Element} (hmono :
    Monotone c)
    (hsup : ∀ {I : Type u} [Nonempty I] (d : I → V₀.Element)
      (hdir : ∀ i j, ∃ k, d i ≤ d k ∧ d j ≤ d k)
      (hdir' : ∀ i j, ∃ k, c (d i) ≤ c (d k) ∧ c (d j) ≤ c (d k)),
      c (iSupDirected d hdir) = iSupDirected (fun i => c (d i)) hdir') :
    Continuous c := by
  rw [continuous_def]
  intro U hU
  constructor
  intro x hx
  rw [Set.mem_preimage] at hx
  set fam : {X : Set α // x.mem X} → V₀.Element := fun i => V₀.principal (x.sub i.2)
    with hfam
  have hdir : ∀ i j : {X : Set α // x.mem X}, ∃ k, fam i ≤ fam k ∧ fam j ≤ fam k :=
    principalFamily_directed x
  have hdir' : ∀ i j : {X : Set α // x.mem X}, ∃ k, c (fam i) ≤ c (fam k) ∧ c (fam j)
    ≤ c (fam k) :=
    fun i j => by obtain ⟨k, hik, hjk⟩ := hdir i j; exact ⟨k, hmono hik, hmono hjk⟩
  have hxeq : c x = iSupDirected (fun i => c (fam i)) hdir' :=
    (congrArg c (eq_iSupDirected_principal x)).trans
      (hsup (I := {X : Set α // x.mem X}) fam hdir hdir')
  rw [hxeq] at hx
  obtain ⟨Y, hY, hYU⟩ := hU.out _ hx
  obtain ⟨i, hi⟩ := (mem_iSupDirected _ hdir').mp hY
  refine ⟨i.1, i.2, fun x' hx' => hYU ?_⟩
  have hple : fam i ≤ x' := fun Z hZ => x'.up_mem hx' hZ.1 hZ.2
```

```
  exact (hmono hple) Y hi

end

end NeighborhoodSystem

section
open NeighborhoodSystem
universe u
variable {α : Type u} {β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem
    β}

namespace ApproximableMap

theorem toElementMap_ofContinuous (c : V₀.Element → V₁.Element) (hc : Continuous c)
    (x : V₀.Element) : (ofContinuous c hc).toElementMap x = c x := by
  apply Element.ext
  intro Y
  rw [toElementMap_mem_iff_principal, NeighborhoodSystem.
    mem_iff_principal_of_continuous hc]
  constructor
  · rintro ⟨X, hxX, hmem⟩
    refine ⟨X, hxX, ?_⟩
    rwa [ofContinuous, toElementMap_ofMono_principal] at hmem
  · rintro ⟨X, hxX, hmem⟩
    refine ⟨X, hxX, ?_⟩
    rwa [ofContinuous, toElementMap_ofMono_principal]

end ApproximableMap
end

section
set_option linter.unusedVariables false

theorem example_213.{u, u_1} : And
  (And
    (∀ {α : Type u} {β : Type u_1} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁),
      @Continuous (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instTopologicalSpaceElement α V₀)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instTopologicalSpaceElement β V₁)
        fun (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀) =>
        @DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α β V₀ V₁ f x)
    (∀ {α : Type u} {β : Type u_1} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystem β}
      {c :
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀ →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁},
      @Continuous (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
```

```
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instTopologicalSpaceElement α V₀)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instTopologicalSpaceElement β V₁) c →
     ∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀) {Y :
   Set β},
       Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem β V₁ (
  c x) Y)
         (∃ (X : Set α) (hx : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
  .Element.mem α V₀ x X),
           @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem β V₁
             (c
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V₀
   X
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.sub
   α V₀ x X hx)))
             Y)))
(∀ {α : Type u} {β : Type u_1} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (c :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀ →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
  (hc :
    @Continuous (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instTopologicalSpaceElement α V₀)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instTopologicalSpaceElement β V₁) c)
  (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀),
  @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α β V₀ V₁
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.ofContinuous α β V₀ V₁ c hc
  ) x)
    (c x)) :=
@And.intro
(And
  (∀ {α : Type u} {β : Type u_1} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁),
    @Continuous (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instTopologicalSpaceElement α V₀)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instTopologicalSpaceElement β V₁)
      fun (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀) =>
      @DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α β V₀ V₁ f x)
  (∀ {α : Type u} {β : Type u_1} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {c :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀ →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁},
```

```
    @Continuous (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instTopologicalSpaceElement α V₀)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instTopologicalSpaceElement β V₁) c →
      ∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀) {Y :
   Set β},
       Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem β V₁ (
  c x) Y)
          (∃ (X : Set α) (hx : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
  .Element.mem α V₀ x X),
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem β V₁
              (c
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V₀
   X
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.sub
   α V₀ x X hx)))
              Y)))
(∀ {α : Type u} {β : Type u_1} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (c :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀ →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
  (hc :
    @Continuous (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instTopologicalSpaceElement α V₀)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instTopologicalSpaceElement β V₁) c)
  (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀),
  @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α β V₀ V₁
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.ofContinuous α β V₀ V₁ c hc
  ) x)
    (c x))
(@And.intro
  (∀ {α : Type u} {β : Type u_1} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁),
    @Continuous (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instTopologicalSpaceElement α V₀)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instTopologicalSpaceElement β V₁)
      fun (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀) =>
      @DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α β V₀ V₁ f x)
  (∀ {α : Type u} {β : Type u_1} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {c :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀ →
```

```
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁},
    @Continuous (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instTopologicalSpaceElement α V₀)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instTopologicalSpaceElement β V₁) c →
      ∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀) {Y :
   Set β},
        Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem β V₁ (
  c x) Y)
          (∃ (X : Set α) (hx : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
  .Element.mem α V₀ x X),
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem β V₁
              (c
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V₀
   X
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.sub
   α V₀ x X hx)))
              Y))
  @DomainTheory.NeighbourhoodSystems.ApproximableMap.continuous_toElementMap
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  mem_iff_principal_of_continuous)
@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap_ofContinuous
end

end DomainTheory.NeighbourhoodSystems
```

EXERCISE 2.13. (For topologists.) Recall Exercise 1.22 where it was shown that any domain $|D|$ is a topological space. Prove from Exercise 2.9 that the functions $f : |D_0| \to |D_1|$ determined by approximable mappings are exactly *the continuous functions between these spaces.* (Hint: To prove continuity, remark that by 2.9

$$f^{-1}[Y] = \bigcup\{[X] \mid Y \in f(\uparrow X)\};$$

hence, the inverse image of any open set is open. In the other direction, suppose that $f : |D_0| \to |D_1|$ is topologically continuous. Argue that for all $x \in |D_0|$ and all open subsets $U \subseteq |D_1|$ we have

$$f(x) \in U \text{ iff } \exists X \in x.\ f(\uparrow X) \in U.$$

This holds because an open subset of $|D_0|$ is always a union of basic open subsets of the form $[X']$ for $X \in D_0$ and because

$$x = \bigcup\{\uparrow X \mid X \in x\}$$

for all $x \in |D_0|$.)

3.3.16 Exercise 2.14 — isomorphisms of neighbourhoods

Let $f : |D_0| \to |D_1|$ be an isomorphism between domains. Let $\varphi : D_0 \to D_1$ be the one-one correspondence between neighbourhoods provided by Theorem 2.7 where

$$f(\uparrow X) = \uparrow \varphi(X)$$

for all $X \in D_0$. Show that the approximable mapping determined by f is just the relationship $\varphi(X) \subseteq Y$. In addition prove that if $X, X' \in D_0$ are consistent, then

$$\varphi(X \cap X') = \varphi(X) \cap \varphi(X').$$

Remark that the isomorphisms between domains correspond exactly to the isomorphisms between neighbourhood systems (in the sense of one-one inclusion preserving correspondences).

Exercise_2_14.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Theorem_2_7
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

section
open NeighborhoodSystem ApproximableMap
variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

noncomputable def phi (e : V₀.Element ≃o V₁.Element) {X : Set α} (hX : V₀.mem X) : Set
    β :=
  Classical.choose (exists_principal_eq_apply_principal e hX)

theorem phi_mem (e : V₀.Element ≃o V₁.Element) {X : Set α} (hX : V₀.mem X) :
    V₁.mem (phi e hX) :=
  Classical.choose (Classical.choose_spec (exists_principal_eq_apply_principal e hX))

theorem phi_spec (e : V₀.Element ≃o V₁.Element) {X : Set α} (hX : V₀.mem X) :
    e (V₀.principal hX) = V₁.principal (phi_mem e hX) :=
  Classical.choose_spec (Classical.choose_spec (exists_principal_eq_apply_principal e
    hX))

theorem phi_inter (e : V₀.Element ≃o V₁.Element) {X X' : Set α}
    (hX : V₀.mem X) (hX' : V₀.mem X') (hXX' : V₀.mem (X ∩ X')) :
    phi e hXX' = phi e hX ∩ phi e hX' := by
  have hpX_le : V₀.principal hX ≤ V₀.principal hXX' :=
    (V₀.principal_le_iff hX hXX').mpr Set.inter_subset_left
  have hpX'_le : V₀.principal hX' ≤ V₀.principal hXX' :=
    (V₀.principal_le_iff hX' hXX').mpr Set.inter_subset_right
  have hleast : ∀ w : V₀.Element, V₀.principal hX ≤ w → V₀.principal hX' ≤ w →
      V₀.principal hXX' ≤ w := by
    intro w hXw hX'w Z hZ
    obtain ⟨hZmem, hsubZ⟩ := hZ
    have hwX : w.mem X := hXw X ⟨hX, subset_rfl⟩
    have hwX' : w.mem X' := hX'w X' ⟨hX', subset_rfl⟩
    exact w.up_mem (w.inter_mem hwX hwX') hZmem hsubZ
  have hqX : e (V₀.principal hX) = V₁.principal (phi_mem e hX) := phi_spec e hX
  have hqX' : e (V₀.principal hX') = V₁.principal (phi_mem e hX') := phi_spec e hX'
  have hqXX' : e (V₀.principal hXX') = V₁.principal (phi_mem e hXX') := phi_spec e hXX'
  have hsub1 : phi e hXX' ⊆ phi e hX := by
    have h : e (V₀.principal hX) ≤ e (V₀.principal hXX') := e.monotone hpX_le
    rw [hqX, hqXX'] at h
```

```
    exact (V₁.principal_le_iff (phi_mem e hX) (phi_mem e hXX')).mp h
  have hsub1' : phi e hXX' ⊆ phi e hX' := by
    have h : e (V₀.principal hX') ≤ e (V₀.principal hXX') := e.monotone hpX'_le
    rw [hqX', hqXX'] at h
    exact (V₁.principal_le_iff (phi_mem e hX') (phi_mem e hXX')).mp h
  have hsubInter : phi e hXX' ⊆ phi e hX ∩ phi e hX' := Set.subset_inter hsub1 hsub1'
  have hinter : V₁.mem (phi e hX ∩ phi e hX') :=
    V₁.inter_mem (phi_mem e hX) (phi_mem e hX') (phi_mem e hXX') hsubInter
  have hsub2 : phi e hX ∩ phi e hX' ⊆ phi e hXX' := by
    have hqXleI : e (V₀.principal hX) ≤ V₁.principal hinter := by
      rw [hqX]; exact (V₁.principal_le_iff (phi_mem e hX) hinter).mpr Set.
    inter_subset_left
    have hqX'leI : e (V₀.principal hX') ≤ V₁.principal hinter := by
      rw [hqX']; exact (V₁.principal_le_iff (phi_mem e hX') hinter).mpr Set.
    inter_subset_right
    have hpXleI : V₀.principal hX ≤ e.symm (V₁.principal hinter) := by
      have h := e.symm.monotone hqXleI; rwa [e.symm_apply_apply] at h
    have hpX'leI : V₀.principal hX' ≤ e.symm (V₁.principal hinter) := by
      have h := e.symm.monotone hqX'leI; rwa [e.symm_apply_apply] at h
    have hpXX'leI : V₀.principal hXX' ≤ e.symm (V₁.principal hinter) :=
      hleast _ hpXleI hpX'leI
    have h : e (V₀.principal hXX') ≤ V₁.principal hinter := by
      have h := e.monotone hpXX'leI; rwa [e.apply_symm_apply] at h
    rw [hqXX'] at h
    exact (V₁.principal_le_iff (phi_mem e hXX') hinter).mp h
  exact Set.Subset.antisymm hsubInter hsub2

theorem rel_ofIso_iff (e : V₀.Element ≃o V₁.Element) {X : Set α} (hX : V₀.mem X) {Y :
    Set β} :
    (ofIso e).rel X Y ↔ V₁.mem Y ∧ phi e hX ⊆ Y := by
  constructor
  · rintro ⟨_, hmem⟩
    have h : (e (V₀.principal hX)).mem Y := hmem
    rw [phi_spec e hX] at h
    exact h
  · intro h
    refine ⟨hX, ?_⟩
    rw [phi_spec e hX]
    exact h

end

section
set_option linter.unusedVariables false

theorem example_214.{u_1, u_2} : And
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (e :
      @OrderIso (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
    α V₀)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V₀)
```

```
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V₀)))
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   β V₁)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element β V₁)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement β V₁))))
   {X X' : Set α} (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
    X)
   (hX' : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ X')
   (hXX' :
     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ (@Inter.inter (Set
    α) (@Set.instInter α) X X')),
   @Eq (Set β) (@DomainTheory.NeighbourhoodSystems.phi α β V₀ V₁ e (@Inter.inter (Set
   α) (@Set.instInter α) X X') hXX')
     (@Inter.inter (Set β) (@Set.instInter β) (@DomainTheory.NeighbourhoodSystems.phi
    α β V₀ V₁ e X hX)
        (@DomainTheory.NeighbourhoodSystems.phi α β V₀ V₁ e X' hX')))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (e :
    @OrderIso (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   α V₀)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V₀)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V₀)))
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   β V₁)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element β V₁)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement β V₁))))
  {X : Set α} (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ X)
   {Y : Set β},
  Iff
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α β V₀ V₁
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.ofIso α β V₀ V₁ e) X Y)
    (And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁ Y)
      (@LE.le (Set β) (@Set.instLE β) (@DomainTheory.NeighbourhoodSystems.phi α β V₀
   V₁ e X hX) Y))) :=
@And.intro
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (e :
    @OrderIso (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   α V₀)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V₀)
```

```
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V₀)))
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     β V₁)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element β V₁)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement β V₁))))
    {X X' : Set α} (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
     X)
    (hX' : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ X')
    (hXX' :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ (@Inter.inter (Set
     α) (@Set.instInter α) X X')),
    @Eq (Set β) (@DomainTheory.NeighbourhoodSystems.phi α β V₀ V₁ e (@Inter.inter (Set
    α) (@Set.instInter α) X X') hXX')
      (@Inter.inter (Set β) (@Set.instInter β) (@DomainTheory.NeighbourhoodSystems.phi
     α β V₀ V₁ e X hX)
        (@DomainTheory.NeighbourhoodSystems.phi α β V₀ V₁ e X' hX')))
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (e :
      @OrderIso (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     α V₀)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V₀)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V₀)))
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     β V₁)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element β V₁)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement β V₁))))
    {X : Set α} (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ X)
     {Y : Set β},
    Iff
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α β V₀ V₁
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.ofIso α β V₀ V₁ e) X Y)
      (And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁ Y)
        (@LE.le (Set β) (@Set.instLE β) (@DomainTheory.NeighbourhoodSystems.phi α β V₀
     V₁ e X hX) Y)))
  @DomainTheory.NeighbourhoodSystems.phi_inter @DomainTheory.NeighbourhoodSystems.
    rel_ofIso_iff
end

end DomainTheory.NeighbourhoodSystems
```

3.3.17 Exercise 2.15 — opens classified by maps

Exercise_2_15.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_13
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_9
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_2
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_22
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_20
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.bot
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_4
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise215
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem

section

def memO (X : Set (Fin 1)) : Prop := X = Set.univ ∨ X = ∅
end

section
theorem nestedOrDisjoint_O : NestedOrDisjoint memO := by
  rintro X Y (rfl | rfl) (rfl | rfl)
  · exact Or.inl subset_rfl
  · exact Or.inr (Or.inl (Set.empty_subset _))
  · exact Or.inl (Set.empty_subset _)
  · exact Or.inl subset_rfl
end

section
theorem subMaster_O : ∀ {X : Set (Fin 1)}, memO X → X ⊆ Set.univ := fun _ => Set.
    subset_univ _
end

section

def O : NeighborhoodSystem (Fin 1) :=
  NeighborhoodSystem.ofNestedOrDisjoint memO Set.univ Set.univ_nonempty
    (Or.inl rfl) nestedOrDisjoint_O subMaster_O
end

section
@[simp] theorem O_mem {X : Set (Fin 1)} : O.mem X ↔ memO X := Iff.rfl
end

section
@[simp] theorem O_master : O.master = (Set.univ : Set (Fin 1)) := rfl
end

section
```

```
theorem O_mem_empty : O.mem (∅ : Set (Fin 1)) := Or.inr rfl
end

section

theorem O_inter_mem {Y Y' : Set (Fin 1)} (hY : O.mem Y) (hY' : O.mem Y') : O.mem (Y ∩
    Y') := by
  rcases hY with rfl | rfl
  · rw [Set.univ_inter]; exact hY'
  · rw [Set.empty_inter]; exact O_mem_empty
end

section

def botElt : O.Element := O.bot
end

section

theorem mem_botElt {Y : Set (Fin 1)} : botElt.mem Y ↔ Y = (Set.univ : Set (Fin 1)) :=
    by
  rw [botElt, O.mem_bot, O_master]
end

section

def topElt : O.Element := O.principal O_mem_empty
end

section
variable {? : Type*} (V : NeighborhoodSystem ?)

def mapToOpen (f : ApproximableMap V O) : Set V.Element := {x | f.toElementMap x =
    topElt}
end

section

theorem mem_empty_iff_eq_top (z : O.Element) : z.mem ∅ ↔ z = topElt := by
  constructor
  · intro hz
    exact O.eq_principal_of_isMin z hz (fun Y _ => Set.empty_subset Y)
  · rintro rfl
    exact ⟨O_mem_empty, subset_rfl⟩
end

section

theorem element_eq_bot_or_top (z : O.Element) : z = botElt ∨ z = topElt := by
  by_cases hz : z.mem ∅
  · exact Or.inr ((mem_empty_iff_eq_top z).mp hz)
  · refine Or.inl ?_
    apply Element.ext
    intro Y
    constructor
    · intro hY
```

```
      rcases (O_mem.mp (z.sub hY)) with rfl | rfl
      · exact mem_botElt.mpr rfl
      · exact absurd hY hz
    · intro hY
      rw [mem_botElt.mp hY, ← O_master]
      exact z.master_mem
end

section

theorem O_ext {z w : O.Element} (h : z.mem ∅ ↔ w.mem ∅) : z = w := by
  by_cases hz : z.mem ∅
  · rw [(mem_empty_iff_eq_top z).mp hz, (mem_empty_iff_eq_top w).mp (h.mp hz)]
  · have ez : z = botElt :=
      (element_eq_bot_or_top z).resolve_right (fun c => hz ((mem_empty_iff_eq_top z).
    mpr c))
    have ew : w = botElt :=
      (element_eq_bot_or_top w).resolve_right
        (fun c => (fun c' => hz (h.mpr c')) ((mem_empty_iff_eq_top w).mpr c))
    rw [ez, ew]
end

section
variable {? : Type*} (V : NeighborhoodSystem ?)

theorem isOpen_mapToOpen (f : ApproximableMap V O) : IsOpen (mapToOpen V f) := by
  have heq : mapToOpen V f = (fun x => f.toElementMap x) ^-1' O.basicOpen ∅ := by
    ext x
    simp only [mapToOpen, Set.mem_ofPred_eq, Set.mem_preimage, mem_basicOpen]
    exact (mem_empty_iff_eq_top (f.toElementMap x)).symm
  rw [heq]
  exact (O.isOpen_basicOpen ∅).preimage f.continuous_toElementMap
end

section
theorem univ_ne_empty : (Set.univ : Set (Fin 1)) = ∅ := by
  intro h
  have h0 : (0 : Fin 1) ∈ (∅ : Set (Fin 1)) := h ▶ Set.mem_univ 0
  simp at h0
end

section
variable {? : Type*} (V : NeighborhoodSystem ?)

def openToMap (U : Set V.Element) (hU : IsOpen U) : ApproximableMap V O where
  rel X Y := V.mem X ∧ O.mem Y ∧ (Y = ∅ → ∃ hX : V.mem X, V.principal hX ∈ U)
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨V.master_mem, O.master_mem, fun heq => (univ_ne_empty (O_master ▶ heq)
    ).elim⟩
  inter_right := by
    rintro X Y Y' ⟨hX, hY, fY⟩ ⟨_, hY', fY'⟩
    refine ⟨hX, O_inter_mem hY hY', ?_⟩
    intro h
    rcases O_mem.mp hY with rfl | rfl
    · rw [Set.univ_inter] at h; exact fY' h
```

```
    · exact fY rfl
  mono := by
    rintro X X' Y Y' ⟨hX, _, fY⟩ hX'X hYY' hX' hY'
    refine ⟨hX', hY', ?_⟩
    intro hY'eq
    have hYeq : Y = ∅ := Set.subset_empty_iff.mp (hY'eq ▸ hYY')
    obtain ⟨hX0, hmem⟩ := fY hYeq
    have hmem' : V.principal hX ∈ U := hmem
    have hle : V.principal hX ≤ V.principal hX' := (V.principal_le_iff hX hX').mpr hX'
    X
    exact ⟨hX', V.isOpen_isUpperSet hU hmem' hle⟩

theorem toElementMap_openToMap_principal_mem_empty (U : Set V.Element) (hU : IsOpen U)
    {X : Set ?} (hX : V.mem X) :
    ((openToMap V U hU).toElementMap (V.principal hX)).mem ∅ ↔ V.principal hX ∈ U :=
    by
  rw [← (openToMap V U hU).rel_iff_mem_principal hX]
  constructor
  · rintro ⟨_, _, fimpl⟩
    obtain ⟨_, hmem⟩ := fimpl rfl
    exact hmem
  · intro h
    exact ⟨hX, O_mem_empty, fun _ => ⟨hX, h⟩⟩

theorem mem_mapToOpen_openToMap (U : Set V.Element) (hU : IsOpen U) (x : V.Element) :
    x ∈ mapToOpen V (openToMap V U hU) ↔ x ∈ U := by
  rw [mapToOpen, Set.mem_ofPred_eq, ← mem_empty_iff_eq_top,
    ApproximableMap.toElementMap_mem_iff_principal]
  constructor
  · rintro ⟨X, hxX, hmem⟩
    rw [toElementMap_openToMap_principal_mem_empty] at hmem
    have hple : V.principal (x.sub hxX) ≤ x := fun Z hZ => x.up_mem hxX hZ.1 hZ.2
    exact V.isOpen_isUpperSet hU hmem hple
  · intro hxU
    obtain ⟨X, hxX, hXU⟩ := hU.out x hxU
    refine ⟨X, hxX, ?_⟩
    rw [toElementMap_openToMap_principal_mem_empty]
    exact hXU (show V.principal (x.sub hxX) ∈ V.basicOpen X from ⟨x.sub hxX, subset_rfl
    ⟩)

theorem openToMap_mapToOpen (f : ApproximableMap V O) :
    openToMap V (mapToOpen V f) (isOpen_mapToOpen V f) = f := by
  apply ApproximableMap.eq_of_toElementMap_principal
  intro X hX
  apply O_ext
  rw [toElementMap_openToMap_principal_mem_empty, mapToOpen, Set.mem_ofPred_eq,
    ← mem_empty_iff_eq_top]
end

section
set_option linter.unusedVariables false

theorem example_215.{u_1} : And
  (∀ {? : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?)
    (U : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element ? V))
    (hU :
```

```
    @IsOpen (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element ? V)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instTopologicalSpaceElement ? V) U)
   (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element ? V),
   Iff
     (@Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   ? V)
       (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element ? V))
       (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
   Element ? V))
       (@DomainTheory.NeighbourhoodSystems.Exercise215.mapToOpen ? V
         (@DomainTheory.NeighbourhoodSystems.Exercise215.openToMap ? V U hU))
       x)
     (@Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   ? V)
       (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element ? V))
       (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
   Element ? V)) U x))
 (∀ {? : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?)
   (f :
     @DomainTheory.NeighbourhoodSystems.ApproximableMap ?
       (Fin (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))) V
       DomainTheory.NeighbourhoodSystems.Exercise215.O),
   @Eq
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap ?
       (Fin (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))) V
       DomainTheory.NeighbourhoodSystems.Exercise215.O)
     (@DomainTheory.NeighbourhoodSystems.Exercise215.openToMap ? V
       (@DomainTheory.NeighbourhoodSystems.Exercise215.mapToOpen ? V f)
       (@DomainTheory.NeighbourhoodSystems.Exercise215.isOpen_mapToOpen ? V f))
     f) :=
 @And.intro
 (∀ {? : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?)
   (U : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element ? V))
   (hU :
     @IsOpen (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element ? V)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
   instTopologicalSpaceElement ? V) U)
   (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element ? V),
   Iff
     (@Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   ? V)
       (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element ? V))
       (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
   Element ? V))
       (@DomainTheory.NeighbourhoodSystems.Exercise215.mapToOpen ? V
         (@DomainTheory.NeighbourhoodSystems.Exercise215.openToMap ? V U hU))
       x)
     (@Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   ? V)
       (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element ? V))
       (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
   Element ? V)) U x))
 (∀ {? : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?)
   (f :
     @DomainTheory.NeighbourhoodSystems.ApproximableMap ?
```

```
        (Fin (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))) V
        DomainTheory.NeighbourhoodSystems.Exercise215.O),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap ?
        (Fin (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))) V
        DomainTheory.NeighbourhoodSystems.Exercise215.O)
      (@DomainTheory.NeighbourhoodSystems.Exercise215.openToMap ? V
        (@DomainTheory.NeighbourhoodSystems.Exercise215.mapToOpen ? V f)
        (@DomainTheory.NeighbourhoodSystems.Exercise215.isOpen_mapToOpen ? V f))
      f)
  @DomainTheory.NeighbourhoodSystems.Exercise215.mem_mapToOpen_openToMap
  @DomainTheory.NeighbourhoodSystems.Exercise215.openToMap_mapToOpen
end

section
variable {? : Type*} (V : NeighborhoodSystem ?)

def openSet_equiv_map : {U : Set V.Element // IsOpen U} ≃ ApproximableMap V O where
  toFun U := openToMap V U.1 U.2
  invFun f := ⟨mapToOpen V f, isOpen_mapToOpen V f⟩
  left_inv := by
    rintro ⟨U, hU⟩
    apply Subtype.ext
    ext x
    exact mem_mapToOpen_openToMap V U hU x
  right_inv f := openToMap_mapToOpen V f
end

section
theorem O_mem_univ : O.mem (Set.univ : Set (Fin 1)) := Or.inl rfl
end

section

theorem basicOpen_empty_eq_singleton_top : O.basicOpen ∅ = {topElt} := by
  ext x
  rw [mem_basicOpen, mem_empty_iff_eq_top]
  exact Set.mem_singleton_iff.symm
end

section

theorem botElt_le_topElt : botElt ≤ topElt := O.bot_le _
end

section

theorem botElt_ne_topElt : botElt = topElt := by
  intro h
  have htop : topElt.mem ∅ := ⟨O_mem_empty, subset_rfl⟩
  rw [← h, mem_botElt] at htop
  exact univ_ne_empty htop.symm
end

section
```

```
theorem not_isOpen_singleton_botElt : ¬ IsOpen ({botElt} : Set O.Element) := by
  intro h
  obtain ⟨X, hX, hsub⟩ := h.out botElt rfl
  rw [mem_botElt] at hX
  subst hX
  have htop : topElt ∈ ({botElt} : Set O.Element) :=
    hsub (show topElt ∈ O.basicOpen Set.univ from (O_master ▸ topElt.master_mem))
  exact botElt_ne_topElt (Set.mem_singleton_iff.mp htop).symm
end

end DomainTheory.NeighbourhoodSystems.Exercise215
```

EXERCISE 2.15. (For topologists.) Consider the one-token system with

$$\mathcal{O} = \{\{0\}, \emptyset\}.$$

We can regard $|\mathcal{O}|$ as having just two finite elements $\bot$ (bottom) and $\top$ (top), where $\bot \sqsubseteq \top$. For any system D, show that the open subsets U of $|D|$ are in a one-one correspondence with the approximable mappings $f : D \to \mathcal{O}$, where the correspondence is given by the equation

$$U = \{x \in |D| \mid f(x) = \top\}.$$

What are the open subsets of $|\mathcal{O}|$? of $|\mathbb{T}|$? of $|\mathbb{B}|$?

3.3.18 Exercise 2.16 — prefixing is approximable

In the discussion of $\mathbb{B}$ in Chapter 1 we defined a mapping $x \mapsto \sigma x$ for any given $\sigma \in \Sigma^*$. Is this (element-wise) mapping approximable? Show in addition that the mapping $f : \mathbb{B} \to \mathbb{T}$ of 2.3 is uniquely determined among approximable mappings by the equations:

$$f(1x) = \text{true},$$
$$f(01x) = \text{false, and}$$
$$f(00x) = f(x).$$

Exercise_2_16.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Example_2_3
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise216
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ExampleB

section

structure SatisfiesParityEquations (g : ApproximableMap B Example23.T) : Prop where
  one : ∀ x : B.Element, g.toElementMap (sigmaElt [true] x) = Example23.trueElt
  zeroOne : ∀ x : B.Element, g.toElementMap (sigmaElt [false, true] x) = Example23.
    falseElt
```

```
  zeroZero : ∀ x : B.Element, g.toElementMap (sigmaElt [false, false] x) = g.
    toElementMap x
end

section

def sigmaMap (σ : Str) : ApproximableMap B B where
  rel X Y := B.mem X ∧ B.mem Y ∧ prepend σ X ⊆ Y
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨B.master_mem, B.master_mem, Set.subset_univ _⟩
  inter_right := by
    rintro X Y Y' ⟨hX, hY, hsub⟩ ⟨_, hY', hsub'⟩
    have hpre : B.mem (prepend σ X) := memB_prepend σ hX
    have hsubInter : prepend σ X ⊆ Y ∩ Y' := Set.subset_inter hsub hsub'
    exact ⟨hX, B.inter_mem hY hY' hpre hsubInter, hsubInter⟩
  mono := by
    rintro X X' Y Y' ⟨_, _, hsub⟩ hX'X hYY' hX' hY'
    exact ⟨hX', hY', ((prepend_mono σ hX'X).trans hsub).trans hYY'⟩
end

section

theorem key (g : ApproximableMap B Example23.T) (hg : SatisfiesParityEquations g) :
    ∀ σ : Str, g.toElementMap (sigmaElt σ B.bot) = Example23.valElt (Example23.scan σ)
  | [] => by
      rw [sigmaElt_nil]
      have h1 : g.toElementMap B.bot ≤ Example23.trueElt := by
        have hm := g.toElementMap_mono (B.bot_le (sigmaElt [true] B.bot))
        rwa [hg.one] at hm
      have h2 : g.toElementMap B.bot ≤ Example23.falseElt := by
        have hm := g.toElementMap_mono (B.bot_le (sigmaElt [false, true] B.bot))
        rwa [hg.zeroOne] at hm
      exact Example23.eq_botElt_of_le h1 h2
  | [false] => by
      have hbase : g.toElementMap B.bot = Example23.botElt := by
        have h0 := key g hg []
        rwa [sigmaElt_nil] at h0
      have hb : sigmaElt [false] B.bot ≤ sigmaElt [false, false] B.bot := by
        rw [sigmaElt_bot, sigmaElt_bot]
        exact (sigmaBot_le_iff _ _).mpr ⟨[false], rfl⟩
      have hm : g.toElementMap (sigmaElt [false] B.bot) ≤ Example23.botElt := by
        have := g.toElementMap_mono hb
        rwa [hg.zeroZero, hbase] at this
      have hm2 : Example23.botElt ≤ g.toElementMap (sigmaElt [false] B.bot) :=
        Example23.botElt_le _
      exact (le_antisymm hm hm2).trans rfl
  | (true :: t) => by
      rw [show (true :: t : Str) = [true] ++ t from rfl, sigmaElt_append, hg.one,
        Example23.scan_append_true]
      rfl
  | (false :: true :: t) => by
      rw [show (false :: true :: t : Str) = [false, true] ++ t from rfl,
    sigmaElt_append,
        hg.zeroOne, Example23.scan_append_falseTrue]
      rfl
```

```
  | (false :: false :: t) => by
      rw [show (false :: false :: t : Str) = [false, false] ++ t from rfl,
    sigmaElt_append,
        hg.zeroZero, key g hg t, Example23.scan_append_falseFalse]
end

section

theorem eq_parityMap_of_satisfies {g : ApproximableMap B Example23.T}
    (hg : SatisfiesParityEquations g) : g = Example23.parityMap := by
  apply ApproximableMap.ext
  intro X Y
  by_cases hX : B.mem X
  · obtain ⟨σ, rfl⟩ := hX
    rw [g.rel_iff_mem_principal (memB_cone σ)]
    show (g.toElementMap (sigmaBot σ)).mem Y ↔ Example23.parityMap.rel (cone σ) Y
    rw [← sigmaElt_bot, key g hg σ, Example23.parityMap_rel_cone]
  · exact ⟨fun hr => absurd (g.rel_dom hr) hX,
      fun hr => absurd (Example23.parityMap.rel_dom hr) hX⟩
end

section

theorem parityMap_satisfies : SatisfiesParityEquations Example23.parityMap where
  one x := by
    apply Element.ext
    intro Y
    rw [Example23.parityMap_toElementMap_sigmaElt]
    constructor
    · rintro ⟨τ, _, hval⟩
      rwa [Example23.scan_append_true] at hval
    · intro hval
      exact ⟨[], by rw [cone_nil]; exact x.master_mem, by rwa [Example23.
    scan_append_true]⟩
  zeroOne x := by
    apply Element.ext
    intro Y
    rw [Example23.parityMap_toElementMap_sigmaElt]
    constructor
    · rintro ⟨τ, _, hval⟩
      rwa [Example23.scan_append_falseTrue] at hval
    · intro hval
      exact ⟨[], by rw [cone_nil]; exact x.master_mem, by rwa [Example23.
    scan_append_falseTrue]⟩
  zeroZero x := by
    apply Element.ext
    intro Y
    rw [Example23.parityMap_toElementMap_sigmaElt, Example23.
    parityMap_toElementMap_mem]
    constructor
    · rintro ⟨τ, hτ, hval⟩
      exact ⟨τ, hτ, by rwa [Example23.scan_append_falseFalse] at hval⟩
    · rintro ⟨τ, hτ, hval⟩
      exact ⟨τ, hτ, by rwa [Example23.scan_append_falseFalse]⟩
end
```

```
section

theorem toElementMap_sigmaMap (σ : Str) (x : B.Element) :
    (sigmaMap σ).toElementMap x = sigmaElt σ x := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨X, hxX, _, hY, hsub⟩
    exact ⟨hY, X, hxX, hsub⟩
  · rintro ⟨hY, X, hxX, hsub⟩
    exact ⟨X, hxX, x.sub hxX, hY, hsub⟩
end

section
set_option linter.unusedVariables false

theorem example_216 : And
  (∀
    {g :
      @DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.ExampleB.B
        DomainTheory.NeighbourhoodSystems.Example23.T},
    DomainTheory.NeighbourhoodSystems.Exercise216.SatisfiesParityEquations g →
      @Eq
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
          DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.ExampleB.B
          DomainTheory.NeighbourhoodSystems.Example23.T)
        g DomainTheory.NeighbourhoodSystems.Example23.parityMap)
  (∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str)
    (x :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.B),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.B)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
    NeighbourhoodSystems.ExampleB.B
        DomainTheory.NeighbourhoodSystems.ExampleB.B (DomainTheory.
    NeighbourhoodSystems.Exercise216.sigmaMap σ) x)
      (DomainTheory.NeighbourhoodSystems.ExampleB.sigmaElt σ x)) :=
  @And.intro
  (∀
    {g :
      @DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.ExampleB.B
        DomainTheory.NeighbourhoodSystems.Example23.T},
```

```
    DomainTheory.NeighbourhoodSystems.Exercise216.SatisfiesParityEquations g →
      @Eq
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
          DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.ExampleB.B
          DomainTheory.NeighbourhoodSystems.Example23.T)
        g DomainTheory.NeighbourhoodSystems.Example23.parityMap)
  (∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str)
    (x :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.B),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.B)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
    NeighbourhoodSystems.ExampleB.B
        DomainTheory.NeighbourhoodSystems.ExampleB.B (DomainTheory.
    NeighbourhoodSystems.Exercise216.sigmaMap σ) x)
      (DomainTheory.NeighbourhoodSystems.ExampleB.sigmaElt σ x))
  (@DomainTheory.NeighbourhoodSystems.Exercise216.eq_parityMap_of_satisfies)
  DomainTheory.NeighbourhoodSystems.Exercise216.toElementMap_sigmaMap
end

end DomainTheory.NeighbourhoodSystems.Exercise216
```

3.3.19 Exercise 2.17 — equations for erase-ones

Establish in detail that the mapping $g : \mathbb{B} \to \mathbb{B}$ of Exercise 2.4 is approximable. Is it uniquely determined by these equations:

$$g(0x) = 0g(x),$$
$$g(11x) = g(1x),$$
$$g(10x) = 0x,$$
$$g(1) = \bot,$$

or are some missing?

Exercise_2_17.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_2
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Examples_1_2_1_5_revisited
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Example24
```

```
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ExampleB

section

structure SatisfiesRunEquations (g : ApproximableMap B B) : Prop where
  zero : ∀ x : B.Element, g.toElementMap (sigmaElt [false] x) = sigmaElt [false] (g.
    toElementMap x)
  oneOne : ∀ x : B.Element, g.toElementMap (sigmaElt [true, true] x) = g.toElementMap (
    sigmaElt [true] x)
  oneZero : ∀ x : B.Element, g.toElementMap (sigmaElt [true, false] x) = sigmaElt [
    false] x
  one : g.toElementMap (sigmaElt [true] B.bot) = B.bot
end

section

def del : Str → Str
  | [] => []
  | true :: t => del t
  | false :: t => false :: t
end

section
@[simp] theorem del_nil : del [] = [] := rfl
end

section
@[simp] theorem del_true (t : Str) : del (true :: t) = del t := rfl
end

section
@[simp] theorem del_false (t : Str) : del (false :: t) = false :: t := rfl
end

section

def out : Str → Str
  | [] => []
  | false :: t => false :: out t
  | true :: t => del t
end

section
@[simp] theorem out_nil : out [] = [] := rfl
end

section
@[simp] theorem out_false (t : Str) : out (false :: t) = false :: out t := rfl
end

section
@[simp] theorem out_true (t : Str) : out (true :: t) = del t := rfl
end

section
```

```
theorem del_append (s t : Str) : del s <+: del (s ++ t) := by
  induction s with
  | nil => simp
  | cons c s₀ ih =>
    cases c with
    | true => simpa using ih
    | false => exact ⟨t, rfl⟩
end

section

theorem out_append (σ t : Str) : out σ <+: out (σ ++ t) := by
  induction σ with
  | nil => simp
  | cons c σ₀ ih =>
    cases c with
    | true => simpa using del_append σ₀ t
    | false =>
      simp only [List.cons_append, out_false]
      obtain ⟨u, hu⟩ := ih
      exact ⟨u, by rw [List.cons_append, hu]⟩
end

section

theorem out_mono {σ σ' : Str} (h : σ <+: σ') : out σ <+: out σ' := by
  obtain ⟨t, rfl⟩ := h
  exact out_append σ t
end

end DomainTheory.NeighbourhoodSystems.Example24
```

3.3.20 Exercise 2.17 — uniqueness of the erase-ones map

Establish in detail that the mapping $g : \mathbb{B} \to \mathbb{B}$ of Exercise 2.4 is approximable. Is it uniquely determined by these equations:

$$g(0x) = 0g(x),$$
$$g(11x) = g(1x),$$
$$g(10x) = 0x,$$
$$g(1) = \bot,$$

or are some missing?

Exercise_2_17b.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Example_2_4

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_22
```

```
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_20
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Example24
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ExampleB

section

theorem eq_runMap_of_satisfies {g : ApproximableMap B B} (hg : SatisfiesRunEquations g
    ) :
    g = runMap := by
  apply ApproximableMap.ext
  intro X Y
  by_cases hX : B.mem X
  · obtain ⟨σ, rfl⟩ := hX
    rw [g.rel_iff_mem_principal (memB_cone σ)]
    show (g.toElementMap (sigmaBot σ)).mem Y ↔ runMap.rel (cone σ) Y
    rw [← sigmaElt_bot, key g hg σ, sigmaElt_bot, runMap_rel_cone]
    show (B.principal (memB_cone (out σ))).mem Y ↔ B.mem Y ∧ cone (out σ) ⊆ Y
    exact B.mem_principal (memB_cone (out σ))
  · exact ⟨fun hr => absurd (g.rel_dom hr) hX, fun hr => absurd (runMap.rel_dom hr) hX⟩
end

section

theorem runMap_toElementMap_mem (x : B.Element) (Y : Set Str) :
    (runMap.toElementMap x).mem Y ↔ ∃ τ, x.mem (cone τ) ∧ B.mem Y ∧ cone (out τ) ⊆ Y
    := by
  constructor
  · rintro ⟨X, hX, hrel⟩
    obtain ⟨τ, rfl⟩ := x.sub hX
    exact ⟨τ, hX, (runMap_rel_cone τ Y).mp hrel⟩
  · rintro ⟨τ, hτ, hYmem, hsub⟩
    exact ⟨cone τ, hτ, (runMap_rel_cone τ Y).mpr ⟨hYmem, hsub⟩⟩
end

section

theorem runMap_toElementMap_sigmaElt (σ : Str) (x : B.Element) (Y : Set Str) :
    (runMap.toElementMap (sigmaElt σ x)).mem Y ↔
      ∃ τ, x.mem (cone τ) ∧ B.mem Y ∧ cone (out (σ ++ τ)) ⊆ Y := by
  constructor
  · rintro ⟨Z, ⟨_, X, hX, hsub⟩, ?, rfl, hYmem, hsubOut⟩
    obtain ⟨τ, rfl⟩ := x.sub hX
    rw [prepend_cone] at hsub
    exact ⟨τ, hX, hYmem, (cone_subset_cone.mpr (out_mono (cone_subset_cone.mp hsub))).
    trans hsubOut⟩
  · rintro ⟨τ, hτ, hYmem, hsub⟩
    exact ⟨cone (σ ++ τ), ⟨memB_cone _, cone τ, hτ, (prepend_cone σ τ).le⟩,
      (runMap_rel_cone (σ ++ τ) Y).mpr ⟨hYmem, hsub⟩⟩
end

section
```

```
theorem sigmaElt_runMap_toElementMap (τ₀ : Str) (x : B.Element) (Y : Set Str) :
    (sigmaElt τ₀ (runMap.toElementMap x)).mem Y ↔
      ∃ τ, x.mem (cone τ) ∧ B.mem Y ∧ cone (τ₀ ++ out τ) ⊆ Y := by
  constructor
  · rintro ⟨hYmem, Z, hZ, hsub⟩
    obtain ⟨τ, hτ, _, hZsub⟩ := (runMap_toElementMap_mem x Z).mp hZ
    refine ⟨τ, hτ, hYmem, ?_⟩
    rw [← prepend_cone]
    exact (prepend_mono τ₀ hZsub).trans hsub
  · rintro ⟨τ, hτ, hYmem, hsub⟩
    refine ⟨hYmem, cone (out τ),
      (runMap_toElementMap_mem x _).mpr ⟨τ, hτ, memB_cone _, subset_rfl⟩, ?_⟩
    rw [prepend_cone]
    exact hsub
end

section

theorem runMap_satisfies : SatisfiesRunEquations runMap where
  zero x := by
    apply Element.ext
    intro Y
    rw [runMap_toElementMap_sigmaElt, sigmaElt_runMap_toElementMap]
    constructor
    · rintro ⟨τ, hτ, hYmem, hsub⟩
      exact ⟨τ, hτ, hYmem, by rwa [out_append_false] at hsub⟩
    · rintro ⟨τ, hτ, hYmem, hsub⟩
      exact ⟨τ, hτ, hYmem, by rwa [out_append_false]⟩
  oneOne x := by
    apply Element.ext
    intro Y
    rw [runMap_toElementMap_sigmaElt, runMap_toElementMap_sigmaElt]
    constructor
    · rintro ⟨τ, hτ, hYmem, hsub⟩
      exact ⟨τ, hτ, hYmem, by rwa [out_append_trueTrue] at hsub⟩
    · rintro ⟨τ, hτ, hYmem, hsub⟩
      exact ⟨τ, hτ, hYmem, by rwa [← out_append_trueTrue] at hsub⟩
  oneZero x := by
    apply Element.ext
    intro Y
    rw [runMap_toElementMap_sigmaElt]
    constructor
    · rintro ⟨τ, hτ, hYmem, hsub⟩
      rw [out_append_trueFalse] at hsub
      exact ⟨hYmem, cone τ, hτ, by rw [prepend_cone]; exact hsub⟩
    · rintro ⟨hYmem, X, hX, hsub⟩
      obtain ⟨τ, rfl⟩ := x.sub hX
      rw [prepend_cone] at hsub
      exact ⟨τ, hX, hYmem, by rwa [out_append_trueFalse]⟩
  one := by
    apply Element.ext
    intro Y
    rw [runMap_toElementMap_sigmaElt]
    constructor
    · rintro ⟨τ, hτ, hYmem, hsub⟩
```

```
      obtain rfl : τ = [] := bot_mem_cone_iff.mp hτ
      rw [show out ([true] ++ ([] : Str)) = ([] : Str) from rfl, cone_nil] at hsub
      rw [mem_bot]
      exact Set.eq_univ_of_univ_subset hsub
    · intro hY
      rw [mem_bot] at hY
      refine ⟨[], bot_mem_cone_iff.mpr rfl, hY ▸ B.master_mem, ?_⟩
      rw [show out ([true] ++ ([] : Str)) = ([] : Str) from rfl, cone_nil, hY,
    B_master]
end

end DomainTheory.NeighbourhoodSystems.Example24

namespace DomainTheory.NeighbourhoodSystems

namespace NeighborhoodSystem

section
open NeighborhoodSystem
universe u
variable {α : Type u} {β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem
    β}

instance instNonemptyMemSubtype (x : V₀.Element) : Nonempty {X : Set α // x.mem X} :=
  ⟨⟨V₀.master, x.master_mem⟩⟩

theorem continuous_monotone {c : V₀.Element → V₁.Element} (hc : Continuous c) :
    Monotone c := by
  intro x y hxy
  rw [V₁.le_iff_isOpen_imp]
  intro U hU hxU
  exact V₀.isOpen_isUpperSet (hU.preimage hc) hxU hxy

end

end NeighborhoodSystem

end DomainTheory.NeighbourhoodSystems
```

3.3.21 Exercise 2.18 — doubling binary digits

What is the meaning in words of the approximable mapping $h : \mathbb{B} \to \mathbb{B}$, where

$$h(0x) = 00h(x), \text{ and}$$
$$h(1x) = 10h(x),$$

for all elements $x \in |\mathbb{B}|$? Is h an isomorphism? Does there exist a map $k : \mathbb{B} \to \mathbb{B}$ where

$$k \circ h = I_{\mathbb{B}},$$

and is k one-one?

Exercise_2_18.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Theorem_2_5
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Examples_1_2_1_5_revisited
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise218
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ExampleB ApproximableMap

section

def hOut : Str → Str
  | [] => []
  | b :: t => b :: false :: hOut t
end

section
@[simp] theorem hOut_nil : hOut [] = [] := rfl
end

section
@[simp] theorem hOut_cons (b : Bool) (t : Str) : hOut (b :: t) = b :: false :: hOut t
    := rfl
end

section

theorem hOut_append (σ t : Str) : hOut σ <+: hOut (σ ++ t) := by
  induction σ with
  | nil => simp
  | cons b s ih =>
    simp only [List.cons_append, hOut_cons]
    obtain ⟨u, hu⟩ := ih
    exact ⟨u, by rw [List.cons_append, List.cons_append, hu]⟩
end

section

theorem hOut_mono {σ σ' : Str} (h : σ <+: σ') : hOut σ <+: hOut σ' := by
  obtain ⟨t, rfl⟩ := h
  exact hOut_append σ t
end

section

def kOut : Str → Str
  | [] => []
  | [_] => []
  | b :: _ :: t => b :: kOut t
end

section
```

```
@[simp] theorem kOut_nil : kOut [] = [] := rfl
end

section
@[simp] theorem kOut_single (b : Bool) : kOut [b] = [] := rfl
end

section
@[simp] theorem kOut_cons (b c : Bool) (t : Str) : kOut (b :: c :: t) = b :: kOut t :=
     rfl
end

section

def hMap : ApproximableMap B B where
  rel X Y := ∃ σ, X = cone σ ∧ B.mem Y ∧ cone (hOut σ) ⊆ Y
  rel_dom := fun ⟨σ, hX, _, _⟩ => ⟨σ, hX⟩
  rel_cod := fun ⟨_, _, hYmem, _⟩ => hYmem
  master_rel := by
    refine ⟨[], (B_master).trans cone_nil.symm, B.master_mem, ?_⟩
    rw [hOut_nil, B_master, cone_nil]
  inter_right := by
    rintro X Y Y' ⟨σ, hX, hYmem, hYsub⟩ ⟨σ', hX', hY'mem, hY'sub⟩
    have hσ : σ = σ' := cone_injective (hX ▶ hX')
    subst hσ
    have hsub : cone (hOut σ) ⊆ Y ∩ Y' := Set.subset_inter hYsub hY'sub
    exact ⟨σ, hX, B.inter_mem hYmem hY'mem (memB_cone (hOut σ)) hsub, hsub⟩
  mono := by
    rintro X X' Y Y' ⟨σ, hX, _, hYsub⟩ hX'X hYY' hX'mem hY'mem
    obtain ⟨σ', hX'cone⟩ := hX'mem
    have hpre : σ <+: σ' := by
      apply cone_subset_cone.mp; rw [← hX'cone, ← hX]; exact hX'X
    have hcone : cone (hOut σ') ⊆ cone (hOut σ) := cone_subset_cone.mpr (hOut_mono
    hpre)
    exact ⟨σ', hX'cone, hY'mem, (hcone.trans hYsub).trans hYY'⟩
end

section

theorem kOut_append (σ t : Str) : kOut σ <+: kOut (σ ++ t) := by
  induction σ using kOut.induct with
  | case1 => simp
  | case2 _ => simp
  | case3 b c t' ih =>
    simp only [List.cons_append, kOut_cons]
    obtain ⟨u, hu⟩ := ih
    exact ⟨u, by rw [List.cons_append, hu]⟩
end

section

theorem kOut_mono {σ σ' : Str} (h : σ <+: σ') : kOut σ <+: kOut σ' := by
  obtain ⟨t, rfl⟩ := h
  exact kOut_append σ t
end
```

```
section

def kMap : ApproximableMap B B where
  rel X Y := ∃ σ, X = cone σ ∧ B.mem Y ∧ cone (kOut σ) ⊆ Y
  rel_dom := fun ⟨σ, hX, _, _⟩ => ⟨σ, hX⟩
  rel_cod := fun ⟨_, _, hYmem, _⟩ => hYmem
  master_rel := by
    refine ⟨[], (B_master).trans cone_nil.symm, B.master_mem, ?_⟩
    rw [kOut_nil, B_master, cone_nil]
  inter_right := by
    rintro X Y Y' ⟨σ, hX, hYmem, hYsub⟩ ⟨σ', hX', hY'mem, hY'sub⟩
    have hσ : σ = σ' := cone_injective (hX ▶ hX')
    subst hσ
    have hsub : cone (kOut σ) ⊆ Y ∩ Y' := Set.subset_inter hYsub hY'sub
    exact ⟨σ, hX, B.inter_mem hYmem hY'mem (memB_cone (kOut σ)) hsub, hsub⟩
  mono := by
    rintro X X' Y Y' ⟨σ, hX, _, hYsub⟩ hX'X hYY' hX'mem hY'mem
    obtain ⟨σ', hX'cone⟩ := hX'mem
    have hpre : σ <+: σ' := by
      apply cone_subset_cone.mp; rw [← hX'cone, ← hX]; exact hX'X
    have hcone : cone (kOut σ') ⊆ cone (kOut σ) := cone_subset_cone.mpr (kOut_mono
    hpre)
    exact ⟨σ', hX'cone, hY'mem, (hcone.trans hYsub).trans hYY'⟩
end

section

theorem kOut_hOut (σ : Str) : kOut (hOut σ) = σ := by
  induction σ with
  | nil => rfl
  | cons b t ih => simp only [hOut_cons, kOut_cons, ih]
end

section

theorem kMap_comp_hMap : kMap.comp hMap = idMap B := by
  apply ApproximableMap.ext
  intro X Z
  rw [comp_rel, idMap_rel]
  constructor
  · rintro ⟨Y, ⟨σ, hXcone, _, hYsub⟩, τ, hYcone, hZmem, hZsub⟩
    refine ⟨⟨σ, hXcone⟩, hZmem, ?_⟩
    have hτ : τ <+: hOut σ := cone_subset_cone.mp (hYcone ▶ hYsub)
    have hτσ : kOut τ <+: σ := by have := kOut_mono hτ; rwa [kOut_hOut] at this
    calc X = cone σ := hXcone
      _ ⊆ cone (kOut τ) := cone_subset_cone.mpr hτσ
      _ ⊆ Z := hZsub
  · rintro ⟨⟨σ, hXcone⟩, hZmem, hXZ⟩
    refine ⟨cone (hOut σ), ⟨σ, hXcone, memB_cone (hOut σ), subset_rfl⟩, hOut σ, rfl,
    hZmem, ?_⟩
    rw [kOut_hOut, hXcone] at *
    exact hXZ
end

section
```

```
theorem toElementMap_hMap_cone (σ : Str) :
    hMap.toElementMap (B.principal (memB_cone σ)) = B.principal (memB_cone (hOut σ))
    := by
  apply Element.ext
  intro Y
  rw [← hMap.rel_iff_mem_principal (memB_cone σ), mem_principal]
  constructor
  · rintro ⟨?, hcone, hYmem, hsub⟩
    have : σ = ? := cone_injective hcone
    subst this
    exact ⟨hYmem, hsub⟩
  · rintro ⟨hYmem, hsub⟩
    exact ⟨σ, rfl, hYmem, hsub⟩
end

section

theorem toElementMap_kMap_cone (σ : Str) :
    kMap.toElementMap (B.principal (memB_cone σ)) = B.principal (memB_cone (kOut σ))
    := by
  apply Element.ext
  intro Y
  rw [← kMap.rel_iff_mem_principal (memB_cone σ), mem_principal]
  constructor
  · rintro ⟨?, hcone, hYmem, hsub⟩
    have : σ = ? := cone_injective hcone
    subst this
    exact ⟨hYmem, hsub⟩
  · rintro ⟨hYmem, hsub⟩
    exact ⟨σ, rfl, hYmem, hsub⟩
end

section

theorem hMap_not_surjective : ¬ Function.Surjective hMap.toElementMap := by
  intro hsurj
  obtain ⟨x, hx⟩ := hsurj (B.principal (memB_cone [false, true]))
  have hkhx : kMap.toElementMap (hMap.toElementMap x) = x := by
    rw [← toElementMap_comp, kMap_comp_hMap, toElementMap_idMap]
  rw [hx, toElementMap_kMap_cone] at hkhx
  rw [← hkhx, toElementMap_hMap_cone] at hx
  have hcone := cone_injective (B.principal_injective (memB_cone _) (memB_cone _) hx)
  simp at hcone
end

section

theorem kMap_not_injective : ¬ Function.Injective kMap.toElementMap := by
  intro hinj
  have h1 : kMap.toElementMap (B.principal (memB_cone [false]))
      = kMap.toElementMap (B.principal (memB_cone [true])) := by
    rw [toElementMap_kMap_cone, toElementMap_kMap_cone]; rfl
  have h2 := hinj h1
  have hcone := cone_injective (B.principal_injective (memB_cone _) (memB_cone _) h2)
  simp at hcone
end
```

```
section
set_option linter.unusedVariables false

theorem example_218 : And
  (And
    (Not
      (@Function.Surjective
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
          DomainTheory.NeighbourhoodSystems.ExampleB.B)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
          DomainTheory.NeighbourhoodSystems.ExampleB.B)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
          DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
    NeighbourhoodSystems.ExampleB.B
          DomainTheory.NeighbourhoodSystems.ExampleB.B DomainTheory.
    NeighbourhoodSystems.Exercise218.hMap)))
    (@Eq
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
    NeighbourhoodSystems.ExampleB.B
        DomainTheory.NeighbourhoodSystems.ExampleB.B)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.B DomainTheory.NeighbourhoodSystems
    .ExampleB.B
        DomainTheory.NeighbourhoodSystems.ExampleB.B DomainTheory.NeighbourhoodSystems
    .Exercise218.kMap
        DomainTheory.NeighbourhoodSystems.Exercise218.hMap)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.B)))
  (Not
    (@Function.Injective
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.B)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.B)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
    NeighbourhoodSystems.ExampleB.B
        DomainTheory.NeighbourhoodSystems.ExampleB.B DomainTheory.NeighbourhoodSystems
    .Exercise218.kMap))) :=
  @And.intro
  (And
    (Not
      (@Function.Surjective
```

```
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.B)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.B)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.ExampleB.B
        DomainTheory.NeighbourhoodSystems.ExampleB.B DomainTheory.
  NeighbourhoodSystems.Exercise218.hMap)))
   (@Eq
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
       DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.ExampleB.B
       DomainTheory.NeighbourhoodSystems.ExampleB.B)
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
       DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
       DomainTheory.NeighbourhoodSystems.ExampleB.B DomainTheory.NeighbourhoodSystems
  .ExampleB.B
       DomainTheory.NeighbourhoodSystems.ExampleB.B DomainTheory.NeighbourhoodSystems
  .Exercise218.kMap
       DomainTheory.NeighbourhoodSystems.Exercise218.hMap)
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
       DomainTheory.NeighbourhoodSystems.ExampleB.B)))
(Not
  (@Function.Injective
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
       DomainTheory.NeighbourhoodSystems.ExampleB.B)
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
       DomainTheory.NeighbourhoodSystems.ExampleB.B)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
       DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.ExampleB.B
       DomainTheory.NeighbourhoodSystems.ExampleB.B DomainTheory.NeighbourhoodSystems
  .Exercise218.kMap)))
(@And.intro
  (Not
    (@Function.Surjective
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.B)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.B)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
```

```
    NeighbourhoodSystems.ExampleB.B
          DomainTheory.NeighbourhoodSystems.ExampleB.B DomainTheory.
    NeighbourhoodSystems.Exercise218.hMap)))
     (@Eq
       (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
         DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
    NeighbourhoodSystems.ExampleB.B
         DomainTheory.NeighbourhoodSystems.ExampleB.B)
       (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
         DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
         DomainTheory.NeighbourhoodSystems.ExampleB.B DomainTheory.NeighbourhoodSystems
    .ExampleB.B
         DomainTheory.NeighbourhoodSystems.ExampleB.B DomainTheory.NeighbourhoodSystems
    .Exercise218.kMap
         DomainTheory.NeighbourhoodSystems.Exercise218.hMap)
       (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
         DomainTheory.NeighbourhoodSystems.ExampleB.B))
     DomainTheory.NeighbourhoodSystems.Exercise218.hMap_not_surjective
     DomainTheory.NeighbourhoodSystems.Exercise218.kMap_comp_hMap)
  DomainTheory.NeighbourhoodSystems.Exercise218.kMap_not_injective
end

end DomainTheory.NeighbourhoodSystems.Exercise218
```

3.3.22 Exercise 2.19 — maps of two arguments

Generalize Definition 2.1 in an appropriate way in order to define the concept of *an approximable mapping*

$$f : \mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}_2$$

of two variables. (Hint: f can be taken to be a certain kind of ternary relation

$$f \subseteq \mathcal{D}_0 \times \mathcal{D}_1 \times \mathcal{D}_2,$$

where we can write

$$X, Y \; f \; Z$$

for the relationship among neighbourhoods.) What is the corresponding version of Proposition 2.2 for functions of two variables?

Exercise_2_19.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.principal
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_1
@[expose] public section
```

```
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

section
variable {α β ? : Type*}

structure ApproximableMap₂ (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    (V₂ : NeighborhoodSystem ?) where

  rel : Set α → Set β → Set ? → Prop
  rel_dom₀ : ∀ {X Y Z}, rel X Y Z → V₀.mem X
  rel_dom₁ : ∀ {X Y Z}, rel X Y Z → V₁.mem Y
  rel_cod : ∀ {X Y Z}, rel X Y Z → V₂.mem Z

  master_rel : rel V₀.master V₁.master V₂.master

  inter_right : ∀ {X Y Z Z'}, rel X Y Z → rel X Y Z' → rel X Y (Z ∩ Z')

  mono : ∀ {X X' Y Y' Z Z'}, rel X Y Z → X' ⊆ X → Y' ⊆ Y → Z ⊆ Z' →
    V₀.mem X' → V₁.mem Y' → V₂.mem Z' → rel X' Y' Z'

namespace ApproximableMap₂

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

def toElementMap₂ (f : ApproximableMap₂ V₀ V₁ V₂) (x : V₀.Element) (y : V₁.Element) : V₂
    .Element where
  mem Z := ∃ X Y, x.mem X ∧ y.mem Y ∧ f.rel X Y Z
  sub := fun ⟨_, _, _, _, hrel⟩ => f.rel_cod hrel
  master_mem := ⟨V₀.master, V₁.master, x.master_mem, y.master_mem, f.master_rel⟩
  inter_mem := by
    rintro Z Z' ⟨X, Y, hX, hY, hrel⟩ ⟨X', Y', hX', hY', hrel'⟩
    have hXX' : x.mem (X ∩ X') := x.inter_mem hX hX'
    have hYY' : y.mem (Y ∩ Y') := y.inter_mem hY hY'
    have hXX'm : V₀.mem (X ∩ X') := x.sub hXX'
    have hYY'm : V₁.mem (Y ∩ Y') := y.sub hYY'
    refine ⟨X ∩ X', Y ∩ Y', hXX', hYY', ?_⟩
    have h1 : f.rel (X ∩ X') (Y ∩ Y') Z :=
      f.mono hrel Set.inter_subset_left Set.inter_subset_left subset_rfl hXX'm hYY'm (
    f.rel_cod hrel)
    have h2 : f.rel (X ∩ X') (Y ∩ Y') Z' :=
      f.mono hrel' Set.inter_subset_right Set.inter_subset_right subset_rfl hXX'm hYY'
    m
        (f.rel_cod hrel')
    exact f.inter_right h1 h2
  up_mem := by
    rintro Z Z' ⟨X, Y, hX, hY, hrel⟩ hZ' hZZ'
    exact ⟨X, Y, hX, hY, f.mono hrel subset_rfl subset_rfl hZZ' (x.sub hX) (y.sub hY)
    hZ'⟩

end ApproximableMap₂

namespace NeighborhoodSystem

end NeighborhoodSystem
```

```
namespace ApproximableMap

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

end ApproximableMap

namespace ApproximableMap₂

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

@[simp] theorem mem_toElementMap₂ (f : ApproximableMap₂ V₀ V₁ V₂) (x : V₀.Element) (y :
    V₁.Element)
    {Z : Set ?} : (f.toElementMap₂ x y).mem Z ↔ ∃ X Y, x.mem X ∧ y.mem Y ∧ f.rel X Y Z
     := Iff.rfl
end ApproximableMap₂

namespace ApproximableMap₂

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

theorem rel₂_iff_mem_principal (f : ApproximableMap₂ V₀ V₁ V₂) {X : Set α} (hX : V₀.mem
    X)
    {Y : Set β} (hY : V₁.mem Y) {Z : Set ?} :
    f.rel X Y Z ↔ (f.toElementMap₂ (V₀.principal hX) (V₁.principal hY)).mem Z := by
  constructor
  · intro hrel
    exact ⟨X, Y, ⟨hX, subset_rfl⟩, ⟨hY, subset_rfl⟩, hrel⟩
  · rintro ⟨X', Y', ⟨_, hXX'⟩, ⟨_, hYY'⟩, hrel⟩
    exact f.mono hrel hXX' hYY' subset_rfl hX hY (f.rel_cod hrel)

end ApproximableMap₂

namespace ApproximableMap₂

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

theorem toElementMap₂_mono (f : ApproximableMap₂ V₀ V₁ V₂) {x x' : V₀.Element} {y y' : V
    ₁.Element}
    (hx : x ≤ x') (hy : y ≤ y') : f.toElementMap₂ x y ≤ f.toElementMap₂ x' y' := by
  rintro Z ⟨X, Y, hX, hY, hrel⟩
  exact ⟨X, Y, hx X hX, hy Y hY, hrel⟩

end ApproximableMap₂
end

end DomainTheory.NeighbourhoodSystems
```

3.3.23 Exercise 2.20 — powerset of the integers

Discuss again the example of Exercise 1.15 where the domain turns out to be the powerset (set of all subsets) of $\mathbf{N}$. Show how the finite elements can be taken to be the finite subsets of $\mathbf{N}$ and can be identified with the tokens of a suitable neighbourhood system $\mathcal{P}$. (Hint: Define $\uparrow F$ for finite sets $F \subseteq \mathbf{N}$.) Show that both union and intersection ($x \cup y$ and $x \cap y$) are functions on $|\mathcal{P}|$ that are approximable in the sense of Exercise 2.19. (The elements of $|\mathcal{P}|$ are being identified with arbitrary sets $x \subseteq \mathbf{N}$.) Show also that the following transformations are approximable:

$$x + 1 = \{n + 1 \mid n \in x\}, \text{ and}$$
$$x - 1 = \{n \mid n + 1 \in x\}.$$

Exercise_2_20.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_19
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_2
public import Mathlib.Algebra.Group.End
public import Mathlib.Basic.Finite.Defs
public import Mathlib.Order.Hom.Basic
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise220
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem

section

def powerSet : NeighborhoodSystem ℕ where
  mem X := X?.Finite
  master := Set.univ
  master_nonempty := Set.univ_nonempty
  master_mem := by rw [Set.compl_univ]; exact Set.finite_empty
  inter_mem := by
    intro X Y _ hX hY _ _
    rw [Set.compl_inter]; exact hX.union hY
  sub_master := fun _ => Set.subset_univ _
end

section
@[simp] theorem mem_powerSet {X : Set ℕ} : powerSet.mem X ↔ X?.Finite := Iff.rfl
end

section
@[simp] theorem powerSet_master : powerSet.master = (Set.univ : Set ℕ) := rfl
end

section

theorem mem_compl_singleton (n : ℕ) : powerSet.mem ({n}?) := by
  rw [mem_powerSet, compl_compl]; exact Set.finite_singleton n
end

section
```

```
theorem powerSet_inter_mem {A B : Set ℕ} (hA : powerSet.mem A) (hB : powerSet.mem B) :
    powerSet.mem (A ∩ B) := by
  rw [mem_powerSet, Set.compl_inter]; exact hA.union hB
end

section

def toSet (x : powerSet.Element) : Set ℕ := {n | x.mem ({n}?)}
end

section
@[simp] theorem mem_toSet {x : powerSet.Element} {n : ℕ} : n ∈ toSet x ↔ x.mem ({n}?)
     := Iff.rfl
end

section

theorem mem_compl_of_finite (x : powerSet.Element) {t : Set ℕ} (ht : t.Finite)
    (h : ∀ n ∈ t, x.mem ({n}?)) : x.mem (t?) := by
  revert h
  induction t, ht using Set.Finite.induction_on with
  | empty => intro _; rw [Set.compl_empty]; exact x.master_mem
  | @insert a s _ha _hsfin ih =>
    intro h
    have hcompl : (insert a s)? = ({a}?) ∩ (s?) := by rw [Set.insert_eq, Set.
    compl_union]
    rw [hcompl]
    exact x.inter_mem (h a (Set.mem_insert a s))
      (ih (fun n hn => h n (Set.mem_insert_of_mem a hn)))
end

section

def ofSet (S : Set ℕ) : powerSet.Element where
  mem Z := powerSet.mem Z ∧ Z? ⊆ S
  sub h := h.1
  master_mem := ⟨powerSet.master_mem, by rw [powerSet_master, Set.compl_univ]; exact
    Set.empty_subset S⟩
  inter_mem := by
    rintro Z W ⟨hZ, hZS⟩ ⟨hW, hWS⟩
    refine ⟨powerSet_inter_mem hZ hW, ?_⟩
    rw [Set.compl_inter]; exact Set.union_subset hZS hWS
  up_mem := by
    rintro Z W ⟨hZ, hZS⟩ hW hZW
    exact ⟨hW, (Set.compl_subset_compl.mpr hZW).trans hZS⟩
end

section

theorem ofSet_mono {S S' : Set ℕ} (h : S ⊆ S') : ofSet S ≤ ofSet S' :=
  fun _ hZ => ⟨hZ.1, hZ.2.trans h⟩
end

section
theorem ofSet_toSet (x : powerSet.Element) : ofSet (toSet x) = x := by
```

```
  apply Element.ext
  intro Z
  constructor
  · rintro ⟨hZ, hZsub⟩
    have hmem := mem_compl_of_finite x hZ (fun n hn => hZsub hn)
    rwa [compl_compl] at hmem
  · intro hZ
    refine ⟨x.sub hZ, ?_⟩
    intro n hn
    rw [mem_toSet]
    exact x.up_mem hZ (mem_compl_singleton n) (Set.subset_compl_singleton_iff.mpr hn)
end

section

def predSet (S : Set ℕ) : Set ℕ := {n | n + 1 ∈ S}
end

section
@[simp] theorem mem_predSet {S : Set ℕ} {n : ℕ} : n ∈ predSet S ↔ n + 1 ∈ S := Iff.
    rfl
end

section

def interMap₂ : ApproximableMap₂ powerSet powerSet powerSet where
  rel X Y Z := powerSet.mem X ∧ powerSet.mem Y ∧ powerSet.mem Z ∧ X ∪ Y ⊆ Z
  rel_dom₀ h := h.1
  rel_dom₁ h := h.2.1
  rel_cod h := h.2.2.1
  master_rel := ⟨powerSet.master_mem, powerSet.master_mem, powerSet.master_mem,
    Set.union_subset (Set.subset_univ _) (Set.subset_univ _)⟩
  inter_right := by
    rintro X Y Z Z' ⟨hX, hY, hZ, hsub⟩ ⟨_, _, hZ', hsub'⟩
    exact ⟨hX, hY, powerSet_inter_mem hZ hZ', Set.subset_inter hsub hsub'⟩
  mono := by
    rintro X X' Y Y' Z Z' ⟨_, _, _, hsub⟩ hX'X hY'Y hZZ' hX' hY' hZ'
    exact ⟨hX', hY', hZ', (Set.union_subset_union hX'X hY'Y).trans (hsub.trans hZZ')⟩
end

section
theorem predSet_mono {S T : Set ℕ} (h : S ⊆ T) : predSet S ⊆ predSet T := fun _ hn =>
    h hn
end

section

def predMap : ApproximableMap powerSet powerSet where
  rel X Z := powerSet.mem X ∧ powerSet.mem Z ∧ Z? ⊆ predSet X?
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := by
    refine ⟨powerSet.master_mem, powerSet.master_mem, ?_⟩
    rw [powerSet_master, Set.compl_univ]; exact Set.empty_subset _
  inter_right := by
    rintro X Z Z' ⟨hX, hZ, hsub⟩ ⟨_, hZ', hsub'⟩
```

```
    refine ⟨hX, powerSet_inter_mem hZ hZ', ?_⟩
    rw [Set.compl_inter]; exact Set.union_subset hsub hsub'
  mono := by
    rintro X X' Z Z' ⟨_, _, hsub⟩ hX'X hZZ' hX' hZ'
    refine ⟨hX', hZ', ?_⟩
    exact (Set.compl_subset_compl.mpr hZZ').trans
      (hsub.trans (predSet_mono (Set.compl_subset_compl.mpr hX'X)))
end

section

def succSet (S : Set ℕ) : Set ℕ := (· + 1) '' S
end

section
theorem succSet_mono {S T : Set ℕ} (h : S ⊆ T) : succSet S ⊆ succSet T := Set.
    image_mono h
end

section

def succMap : ApproximableMap powerSet powerSet where
  rel X Z := powerSet.mem X ∧ powerSet.mem Z ∧ Z? ⊆ succSet X?
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := by
    refine ⟨powerSet.master_mem, powerSet.master_mem, ?_⟩
    rw [powerSet_master, Set.compl_univ]; exact Set.empty_subset _
  inter_right := by
    rintro X Z Z' ⟨hX, hZ, hsub⟩ ⟨_, hZ', hsub'⟩
    refine ⟨hX, powerSet_inter_mem hZ hZ', ?_⟩
    rw [Set.compl_inter]; exact Set.union_subset hsub hsub'
  mono := by
    rintro X X' Z Z' ⟨_, _, hsub⟩ hX'X hZZ' hX' hZ'
    refine ⟨hX', hZ', ?_⟩
    exact (Set.compl_subset_compl.mpr hZZ').trans
      (hsub.trans (succSet_mono (Set.compl_subset_compl.mpr hX'X)))
end

section
theorem toSet_ofSet (S : Set ℕ) : toSet (ofSet S) = S := by
  ext n
  simp only [mem_toSet]
  constructor
  · rintro ⟨_, hsub⟩
    rw [compl_compl] at hsub
    exact hsub (Set.mem_singleton n)
  · intro hn
    exact ⟨mem_compl_singleton n, by rw [compl_compl]; exact Set.singleton_subset_iff.
    mpr hn⟩
end

section

def equivSetNat : powerSet.Element ≃o Set ℕ where
  toFun := toSet
```

```
  invFun := ofSet
  left_inv := ofSet_toSet
  right_inv := toSet_ofSet
  map_rel_iff' := by
    intro x y
    show toSet x ≤ toSet y ↔ x ≤ y
    constructor
    · intro h
      have hmono := ofSet_mono h
      rwa [ofSet_toSet, ofSet_toSet] at hmono
    · intro h n hn
      exact h _ hn
end

section

def unionMap : ApproximableMap₂ powerSet powerSet powerSet where
  rel X Y Z := powerSet.mem X ∧ powerSet.mem Y ∧ powerSet.mem Z ∧ X ∩ Y ⊆ Z
  rel_dom₀ h := h.1
  rel_dom₁ h := h.2.1
  rel_cod h := h.2.2.1
  master_rel := ⟨powerSet.master_mem, powerSet.master_mem, powerSet.master_mem, Set.
    inter_subset_left⟩
  inter_right := by
    rintro X Y Z Z' ⟨hX, hY, hZ, hsub⟩ ⟨_, _, hZ', hsub'⟩
    exact ⟨hX, hY, powerSet_inter_mem hZ hZ', Set.subset_inter hsub hsub'⟩
  mono := by
    rintro X X' Y Y' Z Z' ⟨_, _, _, hsub⟩ hX'X hY'Y hZZ' hX' hY' hZ'
    exact ⟨hX', hY', hZ', (Set.inter_subset_inter hX'X hY'Y).trans (hsub.trans hZZ')⟩
end

section
theorem toSet_interMap₂ (x y : powerSet.Element) :
    toSet (interMap₂.toElementMap₂ x y) = toSet x ∩ toSet y := by
  ext k
  simp only [mem_toSet, ApproximableMap₂.mem_toElementMap₂, Set.mem_inter_iff]
  constructor
  · rintro ⟨X, Y, hxX, hyY, _, _, _, hsub⟩
    have hkX : k ∈ X := fun h => (hsub (Or.inl h)) rfl
    have hkY : k ∈ Y := fun h => (hsub (Or.inr h)) rfl
    exact ⟨x.up_mem hxX (mem_compl_singleton k) (Set.subset_compl_singleton_iff.mpr hkX
    ),
      y.up_mem hyY (mem_compl_singleton k) (Set.subset_compl_singleton_iff.mpr hkY)⟩
  · rintro ⟨hkx, hky⟩
    exact ⟨{k}?, {k}?, hkx, hky, mem_compl_singleton k, mem_compl_singleton k,
      mem_compl_singleton k, Set.union_subset subset_rfl subset_rfl⟩
end

section
theorem toSet_predMap (x : powerSet.Element) :
    toSet (predMap.toElementMap x) = predSet (toSet x) := by
  ext k
  simp only [mem_toSet, ApproximableMap.mem_toElementMap, mem_predSet]
  constructor
  · rintro ⟨X, hxX, _, _, hsub⟩
    rw [compl_compl] at hsub
```

```
    have hk : k + 1 ∈ X? := hsub (Set.mem_singleton k)
    exact x.up_mem hxX (mem_compl_singleton (k + 1)) (Set.subset_compl_singleton_iff.
    mpr hk)
  · intro hk
    refine ⟨{k + 1}?, hk, mem_compl_singleton (k + 1), mem_compl_singleton k, ?_⟩
    rw [compl_compl]
    intro a ha
    rw [Set.mem_singleton_iff] at ha; subst ha
    rw [mem_predSet, compl_compl]
    exact Set.mem_singleton (a + 1)
end

section
theorem toSet_succMap (x : powerSet.Element) :
    toSet (succMap.toElementMap x) = succSet (toSet x) := by
  ext k
  simp only [mem_toSet, ApproximableMap.mem_toElementMap]
  constructor
  · rintro ⟨X, hxX, _, _, hsub⟩
    rw [compl_compl] at hsub
    obtain ⟨m, hm, rfl⟩ := hsub (Set.mem_singleton k)
    exact ⟨m, x.up_mem hxX (mem_compl_singleton m) (Set.subset_compl_singleton_iff.mpr
    hm), rfl⟩
  · rintro ⟨m, hm, rfl⟩
    refine ⟨{m}?, hm, mem_compl_singleton m, mem_compl_singleton (m + 1), ?_⟩
    rw [compl_compl]
    intro a ha
    rw [Set.mem_singleton_iff] at ha; subst ha
    exact ⟨m, by rw [compl_compl]; exact Set.mem_singleton m, rfl⟩
end

section
theorem toSet_unionMap (x y : powerSet.Element) :
    toSet (unionMap.toElementMap₂ x y) = toSet x ∪ toSet y := by
  ext k
  simp only [mem_toSet, ApproximableMap₂.mem_toElementMap₂, Set.mem_union]
  constructor
  · rintro ⟨X, Y, hxX, hyY, _, _, _, hsub⟩
    by_cases hkX : k ∈ X
    · refine Or.inr ?_
      have hkY : k ∈ Y := fun hkY => (hsub ⟨hkX, hkY⟩) rfl
      exact y.up_mem hyY (mem_compl_singleton k) (Set.subset_compl_singleton_iff.mpr
    hkY)
    · exact Or.inl (x.up_mem hxX (mem_compl_singleton k) (Set.
    subset_compl_singleton_iff.mpr hkX))
  · rintro (hkx | hky)
    · exact ⟨{k}?, Set.univ, hkx, y.master_mem, mem_compl_singleton k, powerSet.
    master_mem,
        mem_compl_singleton k, Set.inter_subset_left⟩
    · exact ⟨Set.univ, {k}?, x.master_mem, hky, powerSet.master_mem,
    mem_compl_singleton k,
        mem_compl_singleton k, Set.inter_subset_right⟩
end

section
set_option linter.unusedVariables false
```

```
theorem example_220 : ∀
  (x y :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
      DomainTheory.NeighbourhoodSystems.Exercise220.powerSet),
  @Eq (Set Nat)
    (DomainTheory.NeighbourhoodSystems.Exercise220.toSet
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.toElementMap₂ Nat Nat Nat
        DomainTheory.NeighbourhoodSystems.Exercise220.powerSet DomainTheory.
    NeighbourhoodSystems.Exercise220.powerSet
        DomainTheory.NeighbourhoodSystems.Exercise220.powerSet DomainTheory.
    NeighbourhoodSystems.Exercise220.unionMap x
        y))
    (@Union.union (Set Nat) (@Set.instUnion Nat) (DomainTheory.NeighbourhoodSystems.
    Exercise220.toSet x)
      (DomainTheory.NeighbourhoodSystems.Exercise220.toSet y)) :=
  DomainTheory.NeighbourhoodSystems.Exercise220.toSet_unionMap
end

end DomainTheory.NeighbourhoodSystems.Exercise220
```

3.3.24 Exercise 2.21 — finite and infinite sequences

The system $\mathcal{B}$ of 2.3 has as its total elements only the infinite sequences. Modify the construction of $\mathcal{B}$ to another neighbourhood system $\mathcal{C}$ which has *both* the finite and infinite sequences as total elements. (Hint: $\mathcal{B} \subseteq \mathcal{C}$.) Show that there is an approximable map xy on elements naturally extending ordinary juxtaposition of sequences. (Hint: Write 01001 for a *total* finite sequence and $01001\ \bot$ for the corresponding finite partial element. Remember to distinguish between Λ (the total empty sequence) and $\bot$ (the undefined sequence). The definition should work out so that if x is an infinite sequence (hence, total), then $xy = x$ for all y. What will xy equal if x is not total? In other words, the construction possesses a rather strong left-to-right bias.)

Exercise_2_21.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_19
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Examples_1_2_1_5_revisited
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.DomainIso
@[expose] public section

section

namespace DomainTheory.NeighbourhoodSystems.Exercise221

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ExampleB

theorem cone_not_subset_singleton (σ τ : Str) : ¬ cone σ ⊆ ({τ} : Set Str) := by
  intro h
  have h1 : σ ∈ ({τ} : Set Str) := h (mem_cone.mpr List.prefix_rfl)
  have h2 : (σ ++ [false]) ∈ ({τ} : Set Str) := h (mem_cone.mpr (List.prefix_append σ
    [false]))
```

```
  rw [Set.mem_singleton_iff] at h1 h2
  rw [← h1] at h2
  have hlen := congrArg List.length h2
  simp only [List.length_append, List.length_cons, List.length_nil] at hlen
  omega

end DomainTheory.NeighbourhoodSystems.Exercise221
end

namespace DomainTheory.NeighbourhoodSystems.Exercise221
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ExampleB

section

theorem cone_ne_singleton (σ τ : Str) : cone σ = ({τ} : Set Str) := by
  intro h
  refine cone_not_subset_singleton σ τ ?_
  intro x hx
  rw [← h]; exact hx
end

section

theorem cone_singleton_nd (σ τ : Str) :
    cone σ ⊆ ({τ} : Set Str) ∨ ({τ} : Set Str) ⊆ cone σ ∨ cone σ ∩ ({τ} : Set Str) = ∅
     :=
  if h : σ <+: τ then
    Or.inr (Or.inl (Set.singleton_subset_iff.mpr (mem_cone.mpr h)))
  else
    Or.inr (Or.inr (by
      ext w
      simp only [Set.mem_inter_iff, mem_cone, Set.mem_singleton_iff, Set.
    mem_empty_iff_false,
        iff_false, not_and]
      rintro hw rfl
      exact h hw))
end

section

def memC (X : Set Str) : Prop := (∃ σ, X = cone σ) ∨ (∃ σ, X = {σ})
end

section

theorem singleton_cone_nd (σ τ : Str) :
    ({σ} : Set Str) ⊆ cone τ ∨ cone τ ⊆ ({σ} : Set Str) ∨ ({σ} : Set Str) ∩ cone τ = ∅
     :=
  if h : τ <+: σ then
    Or.inl (Set.singleton_subset_iff.mpr (mem_cone.mpr h))
  else
    Or.inr (Or.inr (by
      ext w
      simp only [Set.mem_inter_iff, Set.mem_singleton_iff, mem_cone, Set.
    mem_empty_iff_false,
        iff_false, not_and]
```

```
      rintro rfl hw
      exact h hw))
end

section

theorem singleton_singleton_nd (σ τ : Str) :
    ({σ} : Set Str) ⊆ ({τ} : Set Str) ∨ ({τ} : Set Str) ⊆ ({σ} : Set Str) ∨
      ({σ} : Set Str) ∩ ({τ} : Set Str) = ∅ := by
  by_cases h : σ = τ
  · subst h; exact Or.inl subset_rfl
  · refine Or.inr (Or.inr ?_)
    ext w
    simp only [Set.mem_inter_iff, Set.mem_singleton_iff, Set.mem_empty_iff_false,
    iff_false,
      not_and]
    rintro rfl h2
    exact h h2
end

section

theorem nestedOrDisjoint_C : NestedOrDisjoint memC := by
  rintro X Y hX hY
  rcases hX with ⟨σ, rfl⟩ | ⟨σ, rfl⟩ <;> rcases hY with ⟨τ, rfl⟩ | ⟨τ, rfl⟩
  · exact cone_trichotomy σ τ
  · exact cone_singleton_nd σ τ
  · exact singleton_cone_nd σ τ
  · exact singleton_singleton_nd σ τ
end

section

def C : NeighborhoodSystem Str :=
  ofNestedOrDisjoint memC Set.univ ⟨[], Set.mem_univ _⟩
    (Or.inl ⟨[], cone_nil.symm⟩) nestedOrDisjoint_C
    (by rintro X (⟨σ, rfl⟩ | ⟨σ, rfl⟩) <;> exact Set.subset_univ _)
end

section
@[simp] theorem C_mem {X : Set Str} : C.mem X ↔ memC X := Iff.rfl
end

section
@[simp] theorem C_master : C.master = Set.univ := rfl
end

section

theorem memC_cone (σ : Str) : C.mem (cone σ) := Or.inl ⟨σ, rfl⟩
end

section

theorem memC_singleton (σ : Str) : C.mem ({σ} : Set Str) := Or.inr ⟨σ, rfl⟩
end
```

```
section

theorem prepend_mono (σ : Str) {Y Y' : Set Str} (h : Y' ⊆ Y) : prepend σ Y' ⊆ prepend
    σ Y := by
  rintro w ⟨τ, hτ, rfl⟩
  exact ⟨τ, h hτ, rfl⟩
end

section

theorem prepend_singleton (σ ? : Str) : prepend σ ({?} : Set Str) = ({σ ++ ?} : Set
    Str) := by
  ext w
  simp only [mem_prepend, Set.mem_singleton_iff]
  constructor
  · rintro ⟨τ, rfl, rfl⟩; rfl
  · rintro rfl; exact ⟨?, rfl, rfl⟩
end

section

theorem memC_prepend (σ : Str) {Y : Set Str} (hY : C.mem Y) : C.mem (prepend σ Y) :=
    by
  rcases hY with ⟨?, rfl⟩ | ⟨?, rfl⟩
  · rw [prepend_cone]; exact memC_cone (σ ++ ?)
  · rw [prepend_singleton]; exact memC_singleton (σ ++ ?)
end

section

theorem prepend_subset_cone (σ : Str) (Y : Set Str) : prepend σ Y ⊆ cone σ := by
  rintro w ⟨τ, _, rfl⟩
  exact mem_cone.mpr (List.prefix_append σ τ)
end

section

def singletonElt (σ : Str) : C.Element := C.principal (memC_singleton σ)
end

section

def Lambda : C.Element := singletonElt []
end

section

theorem subset_singleton_eq {W : Set Str} {σ : Str} (hW : C.mem W) (hsub : W ⊆ ({σ} :
    Set Str)) :
    W = ({σ} : Set Str) := by
  rcases hW with ⟨?, rfl⟩ | ⟨?, rfl⟩
  · exact absurd hsub (cone_not_subset_singleton ? σ)
  · rw [Set.singleton_subset_iff, Set.mem_singleton_iff] at hsub
    rw [hsub]
end
```

```
section

def juxtapose : ApproximableMap₂ C C C where
  rel X Y Z := C.mem Y ∧ C.mem Z ∧
    ((∃ σ, X = cone σ ∧ cone σ ⊆ Z) ∨ (∃ σ, X = ({σ} : Set Str) ∧ prepend σ Y ⊆ Z))
  rel_dom₀ := by
    rintro X Y Z ⟨_, _, (⟨σ, rfl, _⟩ | ⟨σ, rfl, _⟩)⟩
    · exact memC_cone σ
    · exact memC_singleton σ
  rel_dom₁ := fun ⟨hY, _, _⟩ => hY
  rel_cod := fun ⟨_, hZ, _⟩ => hZ
  master_rel := ⟨C.master_mem, C.master_mem,
    Or.inl ⟨[], C_master.trans cone_nil.symm, by rw [C_master]; exact Set.subset_univ _
    ⟩⟩
  inter_right := by
    rintro X Y Z Z' ⟨hY, hZ, hd⟩ ⟨_, hZ', hd'⟩
    rcases hd with ⟨σ, rfl, hsub⟩ | ⟨σ, rfl, hsub⟩
    · rcases hd' with ⟨σ', hX', hsub'⟩ | ⟨σ', hX', _⟩
      · obtain rfl : σ = σ' := cone_injective hX'
        exact ⟨hY, C.inter_mem hZ hZ' (memC_cone σ) (Set.subset_inter hsub hsub'),
          Or.inl ⟨σ, rfl, Set.subset_inter hsub hsub'⟩⟩
      · exact absurd hX' (cone_ne_singleton σ σ')
    · rcases hd' with ⟨σ', hX', _⟩ | ⟨σ', hX', hsub'⟩
      · exact absurd hX'.symm (cone_ne_singleton σ' σ)
      · obtain rfl : σ = σ' := by
          have := hX'; rw [Set.singleton_eq_singleton_iff] at this; exact this
        exact ⟨hY, C.inter_mem hZ hZ' (memC_prepend σ hY) (Set.subset_inter hsub hsub')
    ,
          Or.inr ⟨σ, rfl, Set.subset_inter hsub hsub'⟩⟩
  mono := by
    rintro X X' Y Y' Z Z' ⟨hY, _, hd⟩ hX'X hY'Y hZZ' hX' hY' hZ'
    refine ⟨hY', hZ', ?_⟩
    rcases hd with ⟨σ, rfl, hsub⟩ | ⟨σ, rfl, hsub⟩
    · rcases hX' with ⟨σ', rfl⟩ | ⟨σ', rfl⟩
      · exact Or.inl ⟨σ', rfl, (hX'X.trans hsub).trans hZZ'⟩
      · refine Or.inr ⟨σ', rfl, ?_⟩
        have hσσ' : σ <+: σ' := mem_cone.mp (Set.singleton_subset_iff.mp hX'X)
        have h2 : cone σ' ⊆ cone σ := cone_subset_cone.mpr hσσ'
        exact ((prepend_subset_cone σ' Y').trans (h2.trans hsub)).trans hZZ'
    · obtain rfl : X' = ({σ} : Set Str) := subset_singleton_eq hX' hX'X
      exact Or.inr ⟨σ, rfl, ((prepend_mono σ hY'Y).trans hsub).trans hZZ'⟩
end

section

theorem bot_lt_Lambda : C.bot < Lambda := by
  refine lt_of_le_of_ne (C.bot_le _) ?_
  intro h
  have hmem : C.bot.mem ({([] : Str)} : Set Str) := by
    rw [h]; exact ⟨memC_singleton [], subset_rfl⟩
  rw [C.mem_bot, C_master] at hmem
  have h2 : ([true] : Str) ∈ ({([] : Str)} : Set Str) := by rw [hmem]; trivial
  rw [Set.mem_singleton_iff] at h2
  exact absurd h2 (by decide)
end
```

```
section

theorem isTotal_singletonElt (σ : Str) : C.IsTotal (singletonElt σ) := by
  intro y hy Z hZ
  have hσy : y.mem ({σ} : Set Str) := hy {σ} ⟨memC_singleton σ, subset_rfl⟩
  have hinter : y.mem (({σ} : Set Str) ∩ Z) := y.inter_mem hσy hZ
  have hmemC : C.mem (({σ} : Set Str) ∩ Z) := y.sub hinter
  have heq : ({σ} : Set Str) ∩ Z = ({σ} : Set Str) :=
    subset_singleton_eq hmemC Set.inter_subset_left
  exact ⟨y.sub hZ, by rw [← heq]; exact Set.inter_subset_right⟩
end

section

theorem juxtapose_cone (σ : Str) (y : C.Element) :
    juxtapose.toElementMap₂ (C.principal (memC_cone σ)) y = C.principal (memC_cone σ)
    := by
  apply Element.ext
  intro Z
  constructor
  · rintro ⟨X, Y, ⟨_, hconeX⟩, _, hY, hZ, hd⟩
    rcases hd with ⟨?, rfl, hsub⟩ | ⟨?, rfl, _⟩
    · exact ⟨hZ, hconeX.trans hsub⟩
    · exact absurd hconeX (cone_not_subset_singleton σ ?)
  · rintro ⟨hZ, hconeσZ⟩
    exact ⟨cone σ, C.master, ⟨memC_cone σ, subset_rfl⟩, y.master_mem, C.master_mem, hZ,
      Or.inl ⟨σ, rfl, hconeσZ⟩⟩
end

section

theorem juxtapose_singleton_mem (σ : Str) (y : C.Element) {Z : Set Str} :
    (juxtapose.toElementMap₂ (singletonElt σ) y).mem Z ↔
      C.mem Z ∧ ∃ Y', y.mem Y' ∧ prepend σ Y' ⊆ Z := by
  constructor
  · rintro ⟨X, Y, ⟨_, hsingleX⟩, hYmem, _, hZ, hd⟩
    refine ⟨hZ, ?_⟩
    rcases hd with ⟨?, rfl, hsub⟩ | ⟨?, rfl, hsub⟩
    · have hσ? : ? <+: σ := mem_cone.mp (Set.singleton_subset_iff.mp hsingleX)
      refine ⟨C.master, y.master_mem, ?_⟩
      rw [C_master, prepend_univ]
      exact (cone_subset_cone.mpr hσ?).trans hsub
    · obtain rfl : σ = ? := by
        have := Set.singleton_subset_iff.mp hsingleX
        rwa [Set.mem_singleton_iff] at this
      exact ⟨Y, hYmem, hsub⟩
  · rintro ⟨hZ, Y', hY'mem, hsub⟩
    exact ⟨{σ}, Y', ⟨memC_singleton σ, subset_rfl⟩, hY'mem, y.sub hY'mem, hZ,
      Or.inr ⟨σ, rfl, hsub⟩⟩
end

section
set_option linter.unusedVariables false

theorem example_221 : ∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str)
```

```
  (y :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
      DomainTheory.NeighbourhoodSystems.Exercise221.C)
  {Z : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str},
  Iff
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
      DomainTheory.NeighbourhoodSystems.Exercise221.C
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.toElementMap₂ DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.Exercise221.C DomainTheory.
    NeighbourhoodSystems.Exercise221.C
        DomainTheory.NeighbourhoodSystems.Exercise221.C DomainTheory.
    NeighbourhoodSystems.Exercise221.juxtapose
        (DomainTheory.NeighbourhoodSystems.Exercise221.singletonElt σ) y)
      Z)
    (And
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.Exercise221.C Z)
      (∃ (Y' : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
        And
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
            DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
    NeighbourhoodSystems.Exercise221.C y Y')
          (@LE.le (Set DomainTheory.NeighbourhoodSystems.ExampleB.Str)
            (@Set.instLE DomainTheory.NeighbourhoodSystems.ExampleB.Str)
            (DomainTheory.NeighbourhoodSystems.ExampleB.prepend σ Y') Z))) :=
  DomainTheory.NeighbourhoodSystems.Exercise221.juxtapose_singleton_mem
end

section

theorem memB_imp_memC {X : Set Str} (hX : B.mem X) : C.mem X := by
  obtain ⟨σ, rfl⟩ := hX; exact memC_cone σ
end

section

theorem memC_nonempty {W : Set Str} (hW : C.mem W) : W.Nonempty := by
  rcases hW with ⟨σ, rfl⟩ | ⟨σ, rfl⟩
  · exact ⟨σ, mem_cone.mpr List.prefix_rfl⟩
  · exact ⟨σ, rfl⟩
end

end DomainTheory.NeighbourhoodSystems.Exercise221
```

3.3.25 Exercise 2.22 — domains from closure properties

(For set theorists). We have remarked in Exercise 1.18 and in Exercise 2.11 that any domain $|D|$, as a family of sets (in fact, a family of subsets of the set D itself), is closed under the intersection of an arbitrary non-

empty sub family and under the union of any directed sub family. For those familiar with the subject matter, the example of the (proper) ideals of a commutative ring (with unit) is also seen to be such a family. What is the abstract situation? Let $\mathbf{C}$ be *any* family of sets with these closure properties. It is to be shown that $\mathbf{C}$ is inclusion-isomorphic to a domain. (Hint: Let Δ be the set of finite sets included in sets in $\mathbf{C}$. For $F \in \Delta$, define its "closure" by the equation:

$$\overline{F} = \bigcap \{X \in \mathbf{C} \mid F \subseteq X\}.$$

Every $\overline{F} \in \mathbf{C}$, and these will prove to be the "finite" elements of $\mathbf{C}$. The neighbourhood system $\mathcal{D}$ over Δ can be taken to be the sets of the form

$$C(F) = \{G \in \Delta \mid F \subseteq \overline{G}\}$$

for $F \in \Delta$. Notice that for all $X \in \mathbf{C}$

$$X = \bigcup \{\overline{F} \mid F \subseteq X \text{ and } F \in \Delta\}.$$

)

Check that approximable functions on these families are just those preserving directed unions.

LECTURE III

DOMAIN CONSTRUCTS

Having now seen a number of domains presented through their neighbourhood systems, we need next to introduce general constructs for forming new domains from old. There are an unlimited number of such constructs (technically called *functors*), but we have time only to single out a few of the more important ones. Outstanding among all of them is the notion of product of systems, which in our chosen category has all the expected properties. For the time being in order to simplify notation we assume of the underlying sets Δ_0 and Δ_1 of systems $\mathcal{D}_0$ and $\mathcal{D}_1$ that they are disjoint. There is no loss of generality as $\mathcal{D}_1$ can always be replaced by an isomorphic system disjoint from $\mathcal{D}_0$ in the required sense.

Exercise_2_22.lean

```
module

public import Mathlib.Order.Directed

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_1
public import Mathlib.Algebra.Group.End
public import Mathlib.Basic.Finite.Defs
public import Mathlib.Order.SetNotation
public import Mathlib.Order.Hom.Basic
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise222
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem Set

section
variable {τ : Type*} (C : Set (Set τ))

def Cl (F : Set τ) : Set τ := ⋂₀ {X | X ∈ C ∧ F ⊆ X}
end
```

```
section
variable {τ : Type*} (C : Set (Set τ))
variable (hInter : ∀ ? : Set (Set τ), ?.Nonempty → ? ⊆ C → ⋂₀ ? ∈ C)

include hInter in

theorem Cl_mem {F : Set τ} (h : ∃ X ∈ C, F ⊆ X) : Cl C F ∈ C := by
  show ⋂₀ {X | X ∈ C ∧ F ⊆ X} ∈ C
  apply hInter
  · obtain ⟨X, hX, hFX⟩ := h
    exact ⟨X, hX, hFX⟩
  · intro X hX
    exact hX.1
end

section
variable {τ : Type*} (C : Set (Set τ))

theorem Cl_subset {F X : Set τ} (hX : X ∈ C) (hFX : F ⊆ X) : Cl C F ⊆ X := by
  intro t ht
  exact (Set.mem_sInter.mp ht) X ⟨hX, hFX⟩

class IsTok (F : Set τ) : Prop where
  out : F.Finite ∧ ∃ X ∈ C, F ⊆ X

abbrev Tok := {F : Set τ // IsTok C F}
end

section
variable {τ : Type*} (C : Set (Set τ))
variable (hInter : ∀ ? : Set (Set τ), ?.Nonempty → ? ⊆ C → ⋂₀ ? ∈ C)

def nbhd (F : Set τ) : Set (Tok C) := {G | F ⊆ Cl C G.1}

@[simp] theorem mem_nbhd {F : Set τ} {G : Tok C} : G ∈ nbhd C F ↔ F ⊆ Cl C G.1 := Iff
    .rfl
end

section
variable {τ : Type*} (C : Set (Set τ))
variable (hInter : ∀ ? : Set (Set τ), ?.Nonempty → ? ⊆ C → ⋂₀ ? ∈ C)
variable (hne : C.Nonempty)

include hne in

def botTok : Tok C := ⟨∅, ⟨⟨Set.finite_empty, hne.choose, hne.choose_spec, Set.
    empty_subset _⟩⟩⟩
end

section
variable {τ : Type*} (C : Set (Set τ))
variable (hInter : ∀ ? : Set (Set τ), ?.Nonempty → ? ⊆ C → ⋂₀ ? ∈ C)

theorem nbhd_empty : nbhd C (∅ : Set τ) = Set.univ := by
  ext G
  simp [nbhd]
```

```
end

section
variable {τ : Type*} (C : Set (Set τ))

theorem subset_Cl (F : Set τ) : F ⊆ Cl C F := by
  intro t ht
  rw [Cl, Set.mem_sInter]
  intro X hX
  exact hX.2 ht
end

section
variable {τ : Type*} (C : Set (Set τ))
variable (hInter : ∀ ? : Set (Set τ), ?.Nonempty → ? ⊆ C → ⋂₀ ? ∈ C)

include hInter in

theorem nbhd_subset_iff {F G : Set τ} (hF : IsTok C F) :
    nbhd C F ⊆ nbhd C G ↔ G ⊆ Cl C F := by
  constructor
  · intro h
    have hmem : (⟨F, hF⟩ : Tok C) ∈ nbhd C F := subset_Cl C F
    exact h hmem
  · intro hG H hH
    exact hG.trans (Cl_subset C (Cl_mem C hInter H.2.out.2) hH)
end

section
variable {τ : Type*} (C : Set (Set τ))
variable (hInter : ∀ ? : Set (Set τ), ?.Nonempty → ? ⊆ C → ⋂₀ ? ∈ C)
variable (hne : C.Nonempty)

include hInter hne in

def reprSystem : NeighborhoodSystem (Tok C) where
  mem N := ∃ F : Tok C, N = nbhd C F.1
  master := Set.univ
  master_nonempty := ⟨botTok C hne, Set.mem_univ _⟩
  master_mem := ⟨botTok C hne, (nbhd_empty C).symm⟩
  inter_mem := by
    rintro X Y Z ⟨F, rfl⟩ ⟨F', rfl⟩ ⟨F'', rfl⟩ hZsub
    have hF''mem : (F'' : Tok C) ∈ nbhd C F''.1 := subset_Cl C F''.1
    have h := hZsub hF''mem
    have hClF'' : Cl C F''.1 ∈ C := Cl_mem C hInter F''.2.out.2
    have hunionsub : F.1 ∪ F'.1 ⊆ Cl C F''.1 := Set.union_subset h.1 h.2
    refine ⟨⟨F.1 ∪ F'.1, ⟨⟨F.2.out.1.union F'.2.out.1, Cl C F''.1, hClF'', hunionsub⟩⟩⟩,
    ?_⟩
    ext G
    simp only [mem_nbhd, Set.mem_inter_iff, Set.union_subset_iff]
  sub_master := fun _ => Set.subset_univ _

@[simp] theorem mem_reprSystem {N : Set (Tok C)} :
    (reprSystem C hInter hne).mem N ↔ ∃ F : Tok C, N = nbhd C F.1 := Iff.rfl

@[simp] theorem reprSystem_master : (reprSystem C hInter hne).master = Set.univ := rfl
```

```
theorem directed_step (x : (reprSystem C hInter hne).Element) {F F' : Tok C}
    (hF : x.mem (nbhd C F.1)) (hF' : x.mem (nbhd C F'.1)) :
    ∃ F₃ : Tok C, x.mem (nbhd C F₃.1) ∧ Cl C F.1 ⊆ Cl C F₃.1 ∧ Cl C F'.1 ⊆ Cl C F₃.1 :=
     by
  have hinter : x.mem (nbhd C F.1 ∩ nbhd C F'.1) := x.inter_mem hF hF'
  have hmemD : (reprSystem C hInter hne).mem (nbhd C F.1 ∩ nbhd C F'.1) := x.sub
    hinter
  obtain ⟨F₃, hF₃eq⟩ := hmemD
  rw [hF₃eq] at hinter
  have hF₃self : (F₃ : Tok C) ∈ nbhd C F₃.1 := subset_Cl C F₃.1
  rw [← hF₃eq] at hF₃self
  refine ⟨F₃, hinter, ?_, ?_⟩
  · exact Cl_subset C (Cl_mem C hInter F₃.2.out.2) hF₃self.1
  · exact Cl_subset C (Cl_mem C hInter F₃.2.out.2) hF₃self.2

def famC (x : (reprSystem C hInter hne).Element) : Set (Set τ) :=
  {Y | ∃ F : Tok C, x.mem (nbhd C F.1) ∧ Y = Cl C F.1}

theorem mem_nbhd_bot (x : (reprSystem C hInter hne).Element) :
    x.mem (nbhd C (botTok C hne).1) := by
  have h : (botTok C hne).1 = (∅ : Set τ) := rfl
  rw [h, nbhd_empty C]
  exact x.master_mem

def ofC (X : Set τ) (hX : X ∈ C) : (reprSystem C hInter hne).Element where
  mem N := (reprSystem C hInter hne).mem N ∧ ∃ F : Tok C, F.1 ⊆ X ∧ nbhd C F.1 ⊆ N
  sub h := h.1
  master_mem :=
    ⟨(reprSystem C hInter hne).master_mem, botTok C hne, Set.empty_subset X, Set.
    subset_univ _⟩
  inter_mem := by
    rintro N M ⟨hN, F, hFX, hFN⟩ ⟨hM, F', hF'X, hF'M⟩
    have htok : IsTok C (F.1 ∪ F'.1) :=
      ⟨⟨F.2.out.1.union F'.2.out.1, X, hX, Set.union_subset hFX hF'X⟩⟩
    have hsub : nbhd C (F.1 ∪ F'.1) ⊆ N ∩ M := by
      intro G hG
      rw [mem_nbhd, Set.union_subset_iff] at hG
      exact ⟨hFN hG.1, hF'M hG.2⟩
    exact ⟨(reprSystem C hInter hne).inter_mem hN hM ⟨⟨_, htok⟩, rfl⟩ hsub,
      ⟨F.1 ∪ F'.1, htok⟩, Set.union_subset hFX hF'X, hsub⟩
  up_mem := by
    rintro N M ⟨_, F, hFX, hFN⟩ hM hNM
    exact ⟨hM, F, hFX, hFN.trans hNM⟩

def toC (x : (reprSystem C hInter hne).Element) : Set τ := ⋃₀ famC C hInter hne x

theorem mem_toC (x : (reprSystem C hInter hne).Element) {t : τ} :
    t ∈ toC C hInter hne x ↔ ∃ F : Tok C, x.mem (nbhd C F.1) ∧ t ∈ Cl C F.1 := by
  simp only [toC, famC, Set.mem_sUnion, Set.mem_ofPred_eq]
  constructor
  · rintro ⟨Y, ⟨F, hF, rfl⟩, ht⟩
    exact ⟨F, hF, ht⟩
  · rintro ⟨F, hF, ht⟩
    exact ⟨Cl C F.1, ⟨F, hF, rfl⟩, ht⟩
```

```
theorem exists_tok_of_finite_subset (x : (reprSystem C hInter hne).Element) {s : Set τ}
    (hs : s.Finite) (hsub : s ⊆ toC C hInter hne x) :
    ∃ F : Tok C, x.mem (nbhd C F.1) ∧ s ⊆ Cl C F.1 := by
  revert hsub
  induction s, hs using Set.Finite.induction_on with
  | empty =>
    intro _
    exact ⟨botTok C hne, mem_nbhd_bot C hInter hne x, Set.empty_subset _⟩
  | @insert a s _ha _hsfin ih =>
    intro hsub
    have ha' : a ∈ toC C hInter hne x := hsub (Set.mem_insert a s)
    rw [mem_toC] at ha'
    obtain ⟨Fa, hFa, haCl⟩ := ha'
    obtain ⟨Fs, hFs, hsCl⟩ := ih (fun y hy => hsub (Set.mem_insert_of_mem a hy))
    obtain ⟨F₃, hF₃, hFaF₃, hFsF₃⟩ := directed_step C hInter hne x hFa hFs
    refine ⟨F₃, hF₃, ?_⟩
    rw [Set.insert_subset_iff]
    exact ⟨hFaF₃ haCl, hsCl.trans hFsF₃⟩

theorem mem_nbhd_iff (x : (reprSystem C hInter hne).Element) (G : Tok C) :
    x.mem (nbhd C G.1) ↔ G.1 ⊆ toC C hInter hne x := by
  constructor
  · intro hx t ht
    rw [mem_toC]
    exact ⟨G, hx, subset_Cl C G.1 ht⟩
  · intro hsub
    obtain ⟨F, hF, hGF⟩ := exists_tok_of_finite_subset C hInter hne x G.2.out.1 hsub
    have hnsub : nbhd C F.1 ⊆ nbhd C G.1 := (nbhd_subset_iff C hInter F.2).mpr hGF
    exact x.up_mem hF ⟨G, rfl⟩ hnsub
end

section
variable {τ : Type*} (C : Set (Set τ))
variable (hInter : ∀ ? : Set (Set τ), ?.Nonempty → ? ⊆ C → ⋂₀ ? ∈ C)
variable (hne : C.Nonempty)
variable (hDir : ∀ ? : Set (Set τ), ?.Nonempty → ? ⊆ C → DirectedOn (· ⊆ ·) ? → ⋃₀ ?
    ∈ C)

include hDir in

theorem toC_mem (x : (reprSystem C hInter hne).Element) : toC C hInter hne x ∈ C := by
  show ⋃₀ famC C hInter hne x ∈ C
  apply hDir (famC C hInter hne x)
  · exact ⟨Cl C (botTok C hne).1, botTok C hne, mem_nbhd_bot C hInter hne x, rfl⟩
  · rintro Y ⟨F, _, rfl⟩
    exact Cl_mem C hInter F.2.out.2
  · rintro Y ⟨F, hF, rfl⟩ Y' ⟨F', hF', rfl⟩
    obtain ⟨F₃, hF₃, hFF₃, hF'F₃⟩ := directed_step C hInter hne x hF hF'
    exact ⟨Cl C F₃.1, ⟨F₃, hF₃, rfl⟩, hFF₃, hF'F₃⟩

theorem ofC_toC (x : (reprSystem C hInter hne).Element) :
    ofC C hInter hne (toC C hInter hne x) (toC_mem C hInter hne hDir x) = x := by
  apply Element.ext
  intro N
  constructor
  · rintro ⟨hN, F, hFtoC, hFN⟩
```

```
    have hxF : x.mem (nbhd C F.1) := (mem_nbhd_iff C hInter hne x F).mpr hFtoC
    exact x.up_mem hxF hN hFN
  · intro hxN
    have hN : (reprSystem C hInter hne).mem N := x.sub hxN
    obtain ⟨G, rfl⟩ := hN
    have hGtoC : G.1 ⊆ toC C hInter hne x := (mem_nbhd_iff C hInter hne x G).mp hxN
    exact ⟨⟨G, rfl⟩, G, hGtoC, subset_rfl⟩
end

section
set_option linter.unusedVariables false

theorem example_222.{u_1} : ∀ {τ : Type u_1} (C : Set (Set τ))
  (hInter :
    ∀ (? : Set (Set τ)),
      @Set.Nonempty (Set τ) ? →
        @LE.le (Set (Set τ)) (@Set.instLE (Set τ)) ? C →
          @Membership.mem (Set τ) (Set (Set τ)) (@Set.instMembership (Set τ)) C (@Set.
    sInter τ ?))
  (hne : @Set.Nonempty (Set τ) C)
  (hDir :
    ∀ (? : Set (Set τ)),
      @Set.Nonempty (Set τ) ? →
        @LE.le (Set (Set τ)) (@Set.instLE (Set τ)) ? C →
          @DirectedOn (Set τ) (fun (x1 x2 : Set τ) => @LE.le (Set τ) (@Set.instLE τ) x1
     x2) ? →
            @Membership.mem (Set τ) (Set (Set τ)) (@Set.instMembership (Set τ)) C (@Set
    .sUnion τ ?))
  (x :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
      (@DomainTheory.NeighbourhoodSystems.Exercise222.Tok τ C)
      (@DomainTheory.NeighbourhoodSystems.Exercise222.reprSystem τ C hInter hne)),
  @Eq
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
      (@DomainTheory.NeighbourhoodSystems.Exercise222.Tok τ C)
      (@DomainTheory.NeighbourhoodSystems.Exercise222.reprSystem τ C hInter hne))
    (@DomainTheory.NeighbourhoodSystems.Exercise222.ofC τ C hInter hne
      (@DomainTheory.NeighbourhoodSystems.Exercise222.toC τ C hInter hne x)
      (@DomainTheory.NeighbourhoodSystems.Exercise222.toC_mem τ C hInter hne hDir x))
    x :=
  @DomainTheory.NeighbourhoodSystems.Exercise222.ofC_toC
end

section
variable {τ : Type*} (C : Set (Set τ))
variable (hInter : ∀ ? : Set (Set τ), ?.Nonempty → ? ⊆ C → ⋂₀ ? ∈ C)
variable (hne : C.Nonempty)

theorem toC_ofC (X : Set τ) (hX : X ∈ C) : toC C hInter hne (ofC C hInter hne X hX) =
    X := by
  apply Set.Subset.antisymm
  · intro t ht
    rw [mem_toC] at ht
    obtain ⟨F, hF, htCl⟩ := ht
    obtain ⟨_, F', hF'X, hF'F⟩ := hF
    have h1 : F.1 ⊆ Cl C F'.1 := (nbhd_subset_iff C hInter F'.2).mp hF'F
```

```
    have hFX : F.1 ⊆ X := h1.trans (Cl_subset C hX hF'X)
    exact Cl_subset C hX hFX htCl
  · intro t ht
    have hst : IsTok C {t} := ⟨⟨Set.finite_singleton t, X, hX, Set.singleton_subset_iff
    .mpr ht⟩⟩
    rw [mem_toC]
    refine ⟨⟨{t}, hst⟩, ?_, subset_Cl C {t} rfl⟩
    exact ⟨⟨⟨{t}, hst⟩, rfl⟩, ⟨{t}, hst⟩, Set.singleton_subset_iff.mpr ht, subset_rfl⟩
end

section
variable {τ : Type*} (C : Set (Set τ))
variable (hInter : ∀ ? : Set (Set τ), ?.Nonempty → ? ⊆ C → ⋂₀ ? ∈ C)
variable (hne : C.Nonempty)
variable (hDir : ∀ ? : Set (Set τ), ?.Nonempty → ? ⊆ C → DirectedOn (· ⊆ ·) ? → ⋃₀ ?
    ∈ C)

include hDir in

def reprIso : (reprSystem C hInter hne).Element ≃o {X : Set τ // X ∈ C} where
  toFun x := ⟨toC C hInter hne x, toC_mem C hInter hne hDir x⟩
  invFun X := ofC C hInter hne X.1 X.2
  left_inv x := ofC_toC C hInter hne hDir x
  right_inv X := Subtype.ext (toC_ofC C hInter hne X.1 X.2)
  map_rel_iff' := by
    intro a b
    show toC C hInter hne a ⊆ toC C hInter hne b ↔ a ≤ b
    constructor
    · intro hsub N hN
      have hmemD : (reprSystem C hInter hne).mem N := a.sub hN
      obtain ⟨G, rfl⟩ := hmemD
      have hGa : G.1 ⊆ toC C hInter hne a := (mem_nbhd_iff C hInter hne a G).mp hN
      exact (mem_nbhd_iff C hInter hne b G).mpr (hGa.trans hsub)
    · intro hab t ht
      rw [mem_toC] at ht ⊢
      obtain ⟨F, hF, htCl⟩ := ht
      exact ⟨F, hab _ hF, htCl⟩
end

end DomainTheory.NeighbourhoodSystems.Exercise222
```

3.4 Domain constructs

Dependency diagram. Each box is one item. The arrowhead is on the item that imports. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it is not shown. Blue is a definition, green a proposition or lemma, amber an example, red a theorem, and indigo an exercise.

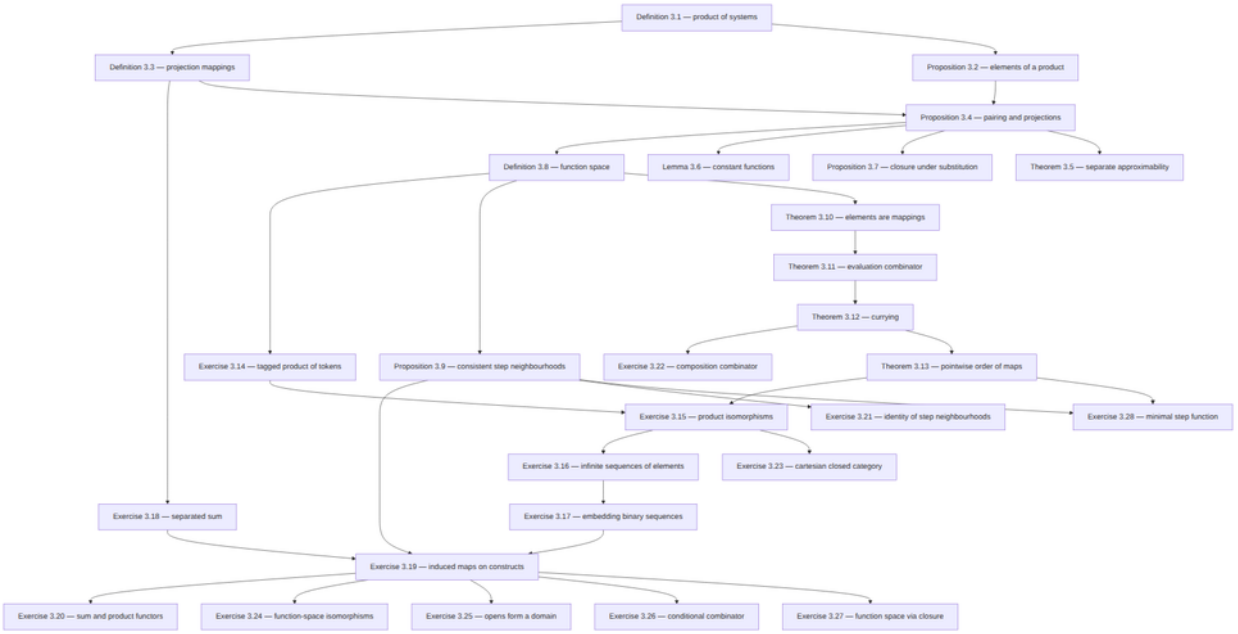

Figure 41: Domain constructs.

3.4.1 Introduction

LECTURE III

DOMAIN CONSTRUCTS

Having now seen a number of domains presented through their neighbourhood systems, we need next to introduce general constructs for forming new domains from old. There are an unlimited number of such constructs (technically called *functors*), but we have time only to single out a few of the more important ones. Outstanding among all of them is the notion of product of systems, which in our chosen category has all the expected properties. For the time being in order to simplify notation we assume of the underlying sets Δ_0 and Δ_1 of systems $\mathcal{D}_0$ and $\mathcal{D}_1$ that they are disjoint. There is no loss of generality as $\mathcal{D}_1$ can always be replaced by an isomorphic system disjoint from $\mathcal{D}_0$ in the required sense.

3.4.2 Definition 3.1 — product of systems

DEFINITION 3.1. Let neighbourhood systems $\mathcal{D}_0$ and $\mathcal{D}_1$ be given over disjoint sets Δ_0 and Δ_1. The *product system* over $\Delta_0 \cup \Delta_1$ is defined by:

$$\mathcal{D}_0 \times \mathcal{D}_1 = \{X \cup Y \mid X \in \mathcal{D}_0 \text{ and } Y \in \mathcal{D}_1\}.$$

For elements $x \in |\mathcal{D}_0|$ and $y \in |\mathcal{D}_1|$ we also define:

$$\langle x, y \rangle = \{X \cup Y \mid X \in x \text{ and } Y \in y\}.$$

□

`Definition_3_1.lean`

```
module
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_1

public import Mathlib.Data.Set.Operations
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem
variable {α β ? ? : Type*}

def prodNbhd (X : Set α) (Y : Set β) : Set (α ? β) := Sum.inl '' X ∪ Sum.inr '' Y

@[simp] theorem mem_prodNbhd_inl {X : Set α} {Y : Set β} {a : α} :
    (Sum.inl a : α ? β) ∈ prodNbhd X Y ↔ a ∈ X := by
  simp [prodNbhd]

@[simp] theorem mem_prodNbhd_inr {X : Set α} {Y : Set β} {b : β} :
    (Sum.inr b : α ? β) ∈ prodNbhd X Y ↔ b ∈ Y := by
  simp [prodNbhd]

@[simp] theorem inl_preimage_prodNbhd (X : Set α) (Y : Set β) :
    Sum.inl ^-1' prodNbhd X Y = X := by ext a; simp

@[simp] theorem inr_preimage_prodNbhd (X : Set α) (Y : Set β) :
    Sum.inr ^-1' prodNbhd X Y = Y := by ext b; simp

theorem prodNbhd_injective {X X' : Set α} {Y Y' : Set β}
    (h : prodNbhd X Y = prodNbhd X' Y') : X = X' ∧ Y = Y' := by
  refine ⟨?_, ?_⟩
  · rw [← inl_preimage_prodNbhd X Y, ← inl_preimage_prodNbhd X' Y', h]
  · rw [← inr_preimage_prodNbhd X Y, ← inr_preimage_prodNbhd X' Y', h]

theorem prodNbhd_inter (X X' : Set α) (Y Y' : Set β) :
    prodNbhd X Y ∩ prodNbhd X' Y' = prodNbhd (X ∩ X') (Y ∩ Y') := by
  ext (a | b) <;> simp [Set.mem_inter_iff]

theorem prodNbhd_subset_iff {X X' : Set α} {Y Y' : Set β} :
    prodNbhd X Y ⊆ prodNbhd X' Y' ↔ X ⊆ X' ∧ Y ⊆ Y' := by
  constructor
  · intro h
    refine ⟨fun a ha => ?_, fun b hb => ?_⟩
    · have : (Sum.inl a : α ? β) ∈ prodNbhd X' Y' := h (by simpa using ha)
      simpa using this
    · have : (Sum.inr b : α ? β) ∈ prodNbhd X' Y' := h (by simpa using hb)
      simpa using this
  · rintro ⟨hX, hY⟩ (a | b) hs
    · simp only [mem_prodNbhd_inl] at hs ⊢; exact hX hs
    · simp only [mem_prodNbhd_inr] at hs ⊢; exact hY hs

def prod (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) : NeighborhoodSystem (
    α ? β) where
  mem W := ∃ X Y, V₀.mem X ∧ V₁.mem Y ∧ W = prodNbhd X Y
  master := prodNbhd V₀.master V₁.master
```

```
  master_nonempty := by
    obtain ⟨a, ha⟩ := V₀.master_nonempty
    exact ⟨Sum.inl a, mem_prodNbhd_inl.mpr ha⟩
  master_mem := ⟨V₀.master, V₁.master, V₀.master_mem, V₁.master_mem, rfl⟩
  inter_mem := by
    rintro W W' Z ⟨X, Y, hX, hY, rfl⟩ ⟨X', Y', hX', hY', rfl⟩ ⟨Z₀, Z₁, hZ₀, hZ₁, rfl⟩
    hsub
    rw [prodNbhd_inter] at hsub ⊢
    obtain ⟨hsub₀, hsub₁⟩ := prodNbhd_subset_iff.mp hsub
    exact ⟨X ∩ X', Y ∩ Y', V₀.inter_mem hX hX' hZ₀ hsub₀, V₁.inter_mem hY hY' hZ₁ hsub₁,
     rfl⟩
  sub_master := by
    rintro W ⟨X, Y, hX, hY, rfl⟩
    exact prodNbhd_subset_iff.mpr ⟨V₀.sub_master hX, V₁.sub_master hY⟩
end

section
open NeighborhoodSystem
variable {α β ? ? : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

@[simp] theorem prod_mem_iff {W : Set (α ? β)} :
    (prod V₀ V₁).mem W ↔ ∃ X Y, V₀.mem X ∧ V₁.mem Y ∧ W = prodNbhd X Y := Iff.rfl

@[simp] theorem prod_master : (prod V₀ V₁).master = prodNbhd V₀.master V₁.master := rfl

theorem prod_mem_prodNbhd {X : Set α} {Y : Set β} (hX : V₀.mem X) (hY : V₁.mem Y) :
    (prod V₀ V₁).mem (prodNbhd X Y) := ⟨X, Y, hX, hY, rfl⟩

theorem prod_mem_prodNbhd_iff {X : Set α} {Y : Set β} :
    (prod V₀ V₁).mem (prodNbhd X Y) ↔ V₀.mem X ∧ V₁.mem Y := by
  constructor
  · rintro ⟨A, B, hA, hB, heq⟩
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    exact ⟨hA, hB⟩
  · rintro ⟨hX, hY⟩; exact prod_mem_prodNbhd hX hY

theorem prodNbhd_preimage {W : Set (α ? β)} (hW : (prod V₀ V₁).mem W) :
    W = prodNbhd (Sum.inl ^-1' W) (Sum.inr ^-1' W) := by
  obtain ⟨X, Y, _, _, rfl⟩ := hW
  rw [inl_preimage_prodNbhd, inr_preimage_prodNbhd]

def NeighborhoodSystem.Element.fst (z : (prod V₀ V₁).Element) : V₀.Element where
  mem X := V₀.mem X ∧ z.mem (prodNbhd X V₁.master)
  sub h := h.1
  master_mem := ⟨V₀.master_mem, z.master_mem⟩
  inter_mem := by
    rintro X X' ⟨_, hzX⟩ ⟨_, hzX'⟩
    have hz := z.inter_mem hzX hzX'
    rw [prodNbhd_inter, Set.inter_self] at hz
    obtain ⟨A, B, hA, _, heq⟩ := z.sub hz
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    exact ⟨hA, hz⟩
  up_mem := by
    rintro X X' ⟨_, hzX⟩ hX' hXX'
    refine ⟨hX', z.up_mem hzX (prod_mem_prodNbhd hX' V₁.master_mem) ?_⟩
```

```
    exact prodNbhd_subset_iff.mpr ⟨hXX', subset_rfl⟩

@[simp] theorem mem_fst {z : (prod V₀ V₁).Element} {X : Set α} :
    z.fst.mem X ↔ V₀.mem X ∧ z.mem (prodNbhd X V₁.master) := Iff.rfl

def NeighborhoodSystem.Element.snd (z : (prod V₀ V₁).Element) : V₁.Element where
  mem Y := V₁.mem Y ∧ z.mem (prodNbhd V₀.master Y)
  sub h := h.1
  master_mem := ⟨V₁.master_mem, z.master_mem⟩
  inter_mem := by
    rintro Y Y' ⟨_, hzY⟩ ⟨_, hzY'⟩
    have hz := z.inter_mem hzY hzY'
    rw [prodNbhd_inter, Set.inter_self] at hz
    obtain ⟨A, B, _, hB, heq⟩ := z.sub hz
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    exact ⟨hB, hz⟩
  up_mem := by
    rintro Y Y' ⟨_, hzY⟩ hY' hYY'
    refine ⟨hY', z.up_mem hzY (prod_mem_prodNbhd V₀.master_mem hY') ?_⟩
    exact prodNbhd_subset_iff.mpr ⟨subset_rfl, hYY'⟩

@[simp] theorem mem_snd {z : (prod V₀ V₁).Element} {Y : Set β} :
    z.snd.mem Y ↔ V₁.mem Y ∧ z.mem (prodNbhd V₀.master Y) := Iff.rfl

def pair (x : V₀.Element) (y : V₁.Element) : (prod V₀ V₁).Element where
  mem W := ∃ X Y, x.mem X ∧ y.mem Y ∧ W = prodNbhd X Y
  sub := by rintro W ⟨X, Y, hX, hY, rfl⟩; exact prod_mem_prodNbhd (x.sub hX) (y.sub hY)
  master_mem := ⟨V₀.master, V₁.master, x.master_mem, y.master_mem, rfl⟩
  inter_mem := by
    rintro W W' ⟨X, Y, hX, hY, rfl⟩ ⟨X', Y', hX', hY', rfl⟩
    exact ⟨X ∩ X', Y ∩ Y', x.inter_mem hX hX', y.inter_mem hY hY', prodNbhd_inter X X'
    Y Y'⟩
  up_mem := by
    rintro W W' ⟨X, Y, hX, hY, rfl⟩ ⟨X', Y', hX', hY', rfl⟩ hsub
    obtain ⟨hXX', hYY'⟩ := prodNbhd_subset_iff.mp hsub
    exact ⟨X', Y', x.up_mem hX hX' hXX', y.up_mem hY hY' hYY', rfl⟩

@[simp] theorem mem_pair {x : V₀.Element} {y : V₁.Element} {W : Set (α ? β)} :
    (pair x y).mem W ↔ ∃ X Y, x.mem X ∧ y.mem Y ∧ W = prodNbhd X Y := Iff.rfl

theorem mem_pair_prodNbhd {x : V₀.Element} {y : V₁.Element} {X : Set α} {Y : Set β} :
    (pair x y).mem (prodNbhd X Y) ↔ x.mem X ∧ y.mem Y := by
  constructor
  · rintro ⟨X', Y', hX', hY', heq⟩
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    exact ⟨hX', hY'⟩
  · rintro ⟨hx, hy⟩; exact ⟨X, Y, hx, hy, rfl⟩

@[simp] theorem fst_pair (x : V₀.Element) (y : V₁.Element) : (pair x y).fst = x := by
  apply Element.ext
  intro X
  constructor
  · rintro ⟨hX, hmem⟩
    exact (mem_pair_prodNbhd.mp hmem).1
  · intro hX
    exact ⟨x.sub hX, mem_pair_prodNbhd.mpr ⟨hX, y.master_mem⟩⟩
```

```
theorem prod_mem_split {z : (prod V₀ V₁).Element} {X : Set α} {Y : Set β}
    (hX : V₀.mem X) (hY : V₁.mem Y) :
    z.mem (prodNbhd X Y) ↔ z.mem (prodNbhd X V₁.master) ∧ z.mem (prodNbhd V₀.master Y)
     := by
  constructor
  · intro h
    refine ⟨z.up_mem h (prod_mem_prodNbhd hX V₁.master_mem) ?_,
            z.up_mem h (prod_mem_prodNbhd V₀.master_mem hY) ?_⟩
    · exact prodNbhd_subset_iff.mpr ⟨subset_rfl, V₁.sub_master hY⟩
    · exact prodNbhd_subset_iff.mpr ⟨V₀.sub_master hX, subset_rfl⟩
  · rintro ⟨h1, h2⟩
    have := z.inter_mem h1 h2
    rwa [prodNbhd_inter, Set.inter_eq_left.mpr (V₀.sub_master hX),
      Set.inter_eq_right.mpr (V₁.sub_master hY)] at this

theorem pair_fst_snd (z : (prod V₀ V₁).Element) : pair z.fst z.snd = z := by
  apply Element.ext
  intro W
  constructor
  · rintro ⟨X, Y, ⟨hX, hzX⟩, ⟨hY, hzY⟩, rfl⟩
    exact (prod_mem_split hX hY).mpr ⟨hzX, hzY⟩
  · intro hW
    obtain ⟨X, Y, hX, hY, rfl⟩ := z.sub hW
    obtain ⟨h1, h2⟩ := (prod_mem_split hX hY).mp hW
    exact ⟨X, Y, ⟨hX, h1⟩, ⟨hY, h2⟩, rfl⟩

@[simp] theorem snd_pair (x : V₀.Element) (y : V₁.Element) : (pair x y).snd = y := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨hY, hmem⟩
    exact (mem_pair_prodNbhd.mp hmem).2
  · intro hY
    exact ⟨y.sub hY, mem_pair_prodNbhd.mpr ⟨x.master_mem, hY⟩⟩

theorem prod_mem_inl {W : Set (α ? β)} (hW : (prod V₀ V₁).mem W) : V₀.mem (Sum.inl ^-1'
     W) := by
  obtain ⟨X, Y, hX, _, rfl⟩ := hW; rwa [inl_preimage_prodNbhd]

theorem prod_mem_inr {W : Set (α ? β)} (hW : (prod V₀ V₁).mem W) : V₁.mem (Sum.inr ^-1'
     W) := by
  obtain ⟨X, Y, _, hY, rfl⟩ := hW; rwa [inr_preimage_prodNbhd]

end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.3 Proposition 3.2 — elements of a product

PROPOSITION 3.2. The construct $\mathcal{D}_0 \times \mathcal{D}_1$ always gives a neighbourhood system where for elements $x, x' \in |\mathcal{D}_0|$ and $y, y' \in |\mathcal{D}_1|$ we have

(i) $\langle x, y\rangle \subseteq \langle x', y'\rangle$ iff $x \subseteq x'$ and $y \subseteq y'$.

Moreover, there is a one-one correspondence between the elements of $|\mathcal{D}_0 \times \mathcal{D}_1|$ and pairs of elements of $|\mathcal{D}_0|$ and $|\mathcal{D}_1|$ since all elements of $|\mathcal{D}_0 \times \mathcal{D}_1|$ are of the form $\langle x, y\rangle$.

Proof: Owing to the disjointness of Δ_0 and Δ_1, we note that for $X, X' \in \mathcal{D}_0$ and $Y, Y' \in \mathcal{D}_1$ we have

$$(1)\ X \cup Y \subseteq X' \cup Y' \text{ iff } X \subseteq X' \text{ and } Y \subseteq Y'.$$

Thus, $\{X \cup Y, X' \cup Y'\}$ is consistent in $\mathcal{D}_0 \times \mathcal{D}_1$ iff $\{X, X'\}$ is consistent in $\mathcal{D}_0$ and $\{Y, Y'\}$ is consistent in $\mathcal{D}_1$. In the consistent case we find

$$(2) \qquad (X \cup Y) \cap (X' \cup Y') = (X \cap X') \cup (Y \cap Y'),$$

and so $\mathcal{D}_0 \times \mathcal{D}_1$ is closed under consistent intersection. As $\Delta_0 \cup \Delta_1 \in \mathcal{D}_0 \times \mathcal{D}_1$, it is certainly a neighbourhood system.

It is easy to check by the previous calculations that $\langle x, y\rangle \in |\mathcal{D}_0 \times \mathcal{D}_1|$ if $x \in |\mathcal{D}_0|$ and $y \in |\mathcal{D}_1|$. The proof of 3.2(i) follows directly from the definition and (1).

Suppose $z \in |\mathcal{D}_0 \times \mathcal{D}_1|$. Define as a temporary notation:

$$z_0 = \{X \in \mathcal{D}_0 \mid X \cup \Delta_1 \in z\}, \quad \text{and} \quad z_1 = \{Y \in \mathcal{D}_1 \mid \Delta_0 \cup Y \in z\}.$$

Clearly, both $z_0 \in |\mathcal{D}_0|$ and $z_1 \in |\mathcal{D}_1|$. In view of the formula

$$(3) \qquad (X \cup \Delta_1) \cap (\Delta_0 \cup Y) = X \cup Y,$$

we can calculate that

$$z = \langle z_0, z_1\rangle.$$

Moreover, if $z = \langle x, y\rangle$, then $\langle x, y\rangle_0 = x$ and $\langle x, y\rangle_1 = y$.

The one-one correspondence required is thus established. □

There is more going on in the proof of 3.2 than just a one-one correspondence between elements and pairs. The extra information is best formalized by introducing a notation for mappings.

Proposition_3_2.lean

```
module
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Definition_3_1

public import Mathlib.Algebra.Group.End
public import Mathlib.Order.Hom.Basic
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem
variable {α β ? ? : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

def prodEquiv (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    (prod V₀ V₁).Element ≃o V₀.Element × V₁.Element where
  toFun z := (z.fst, z.snd)
  invFun p := pair p.1 p.2
  left_inv z := pair_fst_snd z
```

```
  right_inv p := by simp
  map_rel_iff' := by
    intro z z'
    constructor
    · rintro ⟨h1, h2⟩ W hW
      obtain ⟨X, Y, hX, hY, rfl⟩ := z.sub hW
      obtain ⟨ha, hb⟩ := (prod_mem_split hX hY).mp hW
      have hX' : z'.fst.mem X := h1 X ⟨hX, ha⟩
      have hY' : z'.snd.mem Y := h2 Y ⟨hY, hb⟩
      exact (prod_mem_split hX hY).mpr ⟨hX'.2, hY'.2⟩
    · intro h
      exact ⟨fun X ⟨hX, hzX⟩ => ⟨hX, h _ hzX⟩, fun Y ⟨hY, hzY⟩ => ⟨hY, h _ hzY⟩⟩

@[simp] theorem prodEquiv_apply (z : (prod V₀ V₁).Element) :
    prodEquiv V₀ V₁ z = (z.fst, z.snd) := rfl

@[simp] theorem prodEquiv_symm_apply (p : V₀.Element × V₁.Element) :
    (prodEquiv V₀ V₁).symm p = pair p.1 p.2 := rfl

theorem pair_le_pair_iff {x x' : V₀.Element} {y y' : V₁.Element} :
    pair x y ≤ pair x' y' ↔ x ≤ x' ∧ y ≤ y' := by
  constructor
  · intro h
    refine ⟨fun X hX => ?_, fun Y hY => ?_⟩
    · obtain ⟨X', Y', hX', hY', heq⟩ :=
        h (prodNbhd X V₁.master) ⟨X, V₁.master, hX, y.master_mem, rfl⟩
      obtain ⟨rfl, _⟩ := prodNbhd_injective heq
      exact hX'
    · obtain ⟨X', Y', hX', hY', heq⟩ :=
        h (prodNbhd V₀.master Y) ⟨V₀.master, Y, x.master_mem, hY, rfl⟩
      obtain ⟨_, rfl⟩ := prodNbhd_injective heq
      exact hY'
  · rintro ⟨hx, hy⟩ W ⟨X, Y, hX, hY, rfl⟩
    exact ⟨X, Y, hx X hX, hy Y hY, rfl⟩
end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.4 Definition 3.3 — projection mappings

DEFINITION 3.3. *Projection mappings*

$$p_0 : \mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}_0 \quad \text{and} \quad p_1 : \mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}_1$$

are defined as relations where

$$(X \cup Y)\; p_0\; X' \text{ iff } X \subseteq X', \quad \text{and} \quad (X \cup Y)\; p_1\; Y' \text{ iff } Y \subseteq Y'$$

hold for all $X, X' \in \mathcal{D}_0$ and $Y, Y' \in \mathcal{D}_1$. Given $f : \mathcal{D}_2 \to \mathcal{D}_0$ and $g : \mathcal{D}_2 \to \mathcal{D}_1$, the *paired mapping*

$$\langle f, g \rangle : \mathcal{D}_2 \to \mathcal{D}_0 \times \mathcal{D}_1$$

is defined as a relation where

$$Z \ \langle f, g \rangle \ (X \cup Y) \text{ iff } Z \ f \ X \text{ and } Z \ g \ Y$$

holds for all $X \in \mathcal{D}_0$, $Y \in \mathcal{D}_1$, and $Z \in \mathcal{D}_2$. □

Definition_3_3.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Definition_3_1
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_2
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem
variable {α β ? ? : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
variable {V₂ : NeighborhoodSystem ?}
open ApproximableMap

def paired (f : ApproximableMap V₂ V₀) (g : ApproximableMap V₂ V₁) :
    ApproximableMap V₂ (prod V₀ V₁) where
  rel Z P := (prod V₀ V₁).mem P ∧ f.rel Z (Sum.inl ^-1' P) ∧ g.rel Z (Sum.inr ^-1' P)
  rel_dom h := f.rel_dom h.2.1
  rel_cod h := h.1
  master_rel := by
    refine ⟨(prod V₀ V₁).master_mem, ?_, ?_⟩
    · simpa using f.master_rel
    · simpa using g.master_rel
  inter_right := by
    rintro Z P P' ⟨hP, hfP, hgP⟩ ⟨hP', hfP', hgP'⟩
    have hfX := f.inter_right hfP hfP'
    have hgY := g.inter_right hgP hgP'
    refine ⟨?_, ?_, ?_⟩
    · rw [prodNbhd_preimage hP, prodNbhd_preimage hP', prodNbhd_inter]
      exact prod_mem_prodNbhd (f.rel_cod hfX) (g.rel_cod hgY)
    · rw [Set.preimage_inter]; exact hfX
    · rw [Set.preimage_inter]; exact hgY
  mono := by
    rintro Z Z₂ P P₂ ⟨_, hfP, hgP⟩ hZ₂Z hPP₂ hZ₂ hP₂
    obtain ⟨A, B, hA, hB, rfl⟩ := hP₂
    have hinl : Sum.inl ^-1' P ⊆ A := by
      have := Set.preimage_mono (f := Sum.inl) hPP₂; rwa [inl_preimage_prodNbhd] at
    this
    have hinr : Sum.inr ^-1' P ⊆ B := by
      have := Set.preimage_mono (f := Sum.inr) hPP₂; rwa [inr_preimage_prodNbhd] at
    this
    refine ⟨⟨A, B, hA, hB, rfl⟩, ?_, ?_⟩
    · rw [inl_preimage_prodNbhd]; exact f.mono hfP hZ₂Z hinl hZ₂ hA
    · rw [inr_preimage_prodNbhd]; exact g.mono hgP hZ₂Z hinr hZ₂ hB

def proj₀ (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    ApproximableMap (prod V₀ V₁) V₀ where
```

```
  rel W X' := (prod V₀ V₁).mem W ∧ V₀.mem X' ∧ Sum.inl ^-1' W ⊆ X'
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(prod V₀ V₁).master_mem, V₀.master_mem, by simp⟩
  inter_right := by
    rintro W X' X'' ⟨hW, hX', hsub⟩ ⟨_, hX'', hsub'⟩
    obtain ⟨A, B, hA, _, rfl⟩ := hW
    rw [inl_preimage_prodNbhd] at hsub hsub' ⊢
    exact ⟨⟨A, B, hA, ?_?, rfl⟩, V₀.inter_mem hX' hX'' hA (Set.subset_inter hsub hsub'),
      Set.subset_inter hsub hsub'⟩
  mono := by
    rintro W W₂ X' X₂' ⟨_, _, hsub⟩ hW₂W hX'X₂' hW₂ hX₂'
    exact ⟨hW₂, hX₂', ((Set.preimage_mono hW₂W).trans hsub).trans hX'X₂'⟩

@[simp] theorem proj₀_rel {W : Set (α ? β)} {X' : Set α} :
    (proj₀ V₀ V₁).rel W X' ↔ (prod V₀ V₁).mem W ∧ V₀.mem X' ∧ Sum.inl ^-1' W ⊆ X' :=
    Iff.rfl

def proj₁ (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    ApproximableMap (prod V₀ V₁) V₁ where
  rel W Y' := (prod V₀ V₁).mem W ∧ V₁.mem Y' ∧ Sum.inr ^-1' W ⊆ Y'
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(prod V₀ V₁).master_mem, V₁.master_mem, by simp⟩
  inter_right := by
    rintro W Y' Y'' ⟨hW, hY', hsub⟩ ⟨_, hY'', hsub'⟩
    obtain ⟨A, B, _, hB, rfl⟩ := hW
    rw [inr_preimage_prodNbhd] at hsub hsub' ⊢
    exact ⟨⟨A, B, ?_?, hB, rfl⟩, V₁.inter_mem hY' hY'' hB (Set.subset_inter hsub hsub'),
      Set.subset_inter hsub hsub'⟩
  mono := by
    rintro W W₂ Y' Y₂' ⟨_, _, hsub⟩ hW₂W hY'Y₂' hW₂ hY₂'
    exact ⟨hW₂, hY₂', ((Set.preimage_mono hW₂W).trans hsub).trans hY'Y₂'⟩

@[simp] theorem proj₁_rel {W : Set (α ? β)} {Y' : Set β} :
    (proj₁ V₀ V₁).rel W Y' ↔ (prod V₀ V₁).mem W ∧ V₁.mem Y' ∧ Sum.inr ^-1' W ⊆ Y' :=
    Iff.rfl

@[simp] theorem paired_rel {f : ApproximableMap V₂ V₀} {g : ApproximableMap V₂ V₁}
    {Z : Set ?} {P : Set (α ? β)} :
    (paired f g).rel Z P ↔
      (prod V₀ V₁).mem P ∧ f.rel Z (Sum.inl ^-1' P) ∧ g.rel Z (Sum.inr ^-1' P) := Iff.
    rfl

@[simp] theorem toElementMap_proj₀ (z : (prod V₀ V₁).Element) :
    (proj₀ V₀ V₁).toElementMap z = z.fst := by
  apply Element.ext
  intro X'
  constructor
  · rintro ⟨W, hzW, hW, hX', hsub⟩
    obtain ⟨A, B, _, hB, rfl⟩ := hW
    rw [inl_preimage_prodNbhd] at hsub
    refine ⟨hX', z.up_mem hzW (prod_mem_prodNbhd hX' V₁.master_mem) ?_⟩
    exact prodNbhd_subset_iff.mpr ⟨hsub, V₁.sub_master hB⟩
  · rintro ⟨hX', hz⟩
    exact ⟨prodNbhd X' V₁.master, hz, prod_mem_prodNbhd hX' V₁.master_mem, hX', by simp⟩
```

```
@[simp] theorem toElementMap_proj₁ (z : (prod V₀ V₁).Element) :
    (proj₁ V₀ V₁).toElementMap z = z.snd := by
  apply Element.ext
  intro Y'
  constructor
  · rintro ⟨W, hzW, hW, hY', hsub⟩
    obtain ⟨A, B, hA, _, rfl⟩ := hW
    rw [inr_preimage_prodNbhd] at hsub
    refine ⟨hY', z.up_mem hzW (prod_mem_prodNbhd V₀.master_mem hY') ?_⟩
    exact prodNbhd_subset_iff.mpr ⟨V₀.sub_master hA, hsub⟩
  · rintro ⟨hY', hz⟩
    exact ⟨prodNbhd V₀.master Y', hz, prod_mem_prodNbhd V₀.master_mem hY', hY', by simp⟩

theorem toElementMap_proj₀_pair (x : V₀.Element) (y : V₁.Element) :
    (proj₀ V₀ V₁).toElementMap (pair x y) = x := by
  rw [toElementMap_proj₀, fst_pair]

theorem toElementMap_proj₁_pair (x : V₀.Element) (y : V₁.Element) :
    (proj₁ V₀ V₁).toElementMap (pair x y) = y := by
  rw [toElementMap_proj₁, snd_pair]

theorem toElementMap_paired (f : ApproximableMap V₂ V₀) (g : ApproximableMap V₂ V₁)
    (w : V₂.Element) :
    (paired f g).toElementMap w = pair (f.toElementMap w) (g.toElementMap w) := by
  apply Element.ext
  intro P
  constructor
  · rintro ⟨Z, hwZ, hP, hfZ, hgZ⟩
    exact ⟨Sum.inl ^-1' P, Sum.inr ^-1' P, ⟨Z, hwZ, hfZ⟩, ⟨Z, hwZ, hgZ⟩,
    prodNbhd_preimage hP⟩
  · rintro ⟨X, Y, ⟨Z₁, hwZ₁, hfZ₁⟩, ⟨Z₂, hwZ₂, hgZ₂⟩, rfl⟩
    refine ⟨Z₁ ∩ Z₂, w.inter_mem hwZ₁ hwZ₂, prod_mem_prodNbhd (f.rel_cod hfZ₁) (g.
    rel_cod hgZ₂),
      ?_, ?_⟩
    · rw [inl_preimage_prodNbhd]
      exact f.mono hfZ₁ Set.inter_subset_left subset_rfl (w.sub (w.inter_mem hwZ₁ hwZ₂)
    )
        (f.rel_cod hfZ₁)
    · rw [inr_preimage_prodNbhd]
      exact g.mono hgZ₂ Set.inter_subset_right subset_rfl (w.sub (w.inter_mem hwZ₁ hwZ₂
    ))
        (g.rel_cod hgZ₂)

theorem paired_proj (h : ApproximableMap V₂ (prod V₀ V₁)) :
    paired ((proj₀ V₀ V₁).comp h) ((proj₁ V₀ V₁).comp h) = h := by
  apply ext_of_toElementMap
  intro w
  rw [toElementMap_paired, toElementMap_comp, toElementMap_comp, toElementMap_proj₀,
    toElementMap_proj₁, pair_fst_snd]

end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.5 Proposition 3.4 — pairing and projections

Proposition_3_4.lean

```
module
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_5

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem
variable {α β ? ? : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
variable {V₂ : NeighborhoodSystem ?}
open ApproximableMap

theorem proj₀_comp_paired (f : ApproximableMap V₂ V₀) (g : ApproximableMap V₂ V₁) :
    (proj₀ V₀ V₁).comp (paired f g) = f := by
  apply ext_of_toElementMap
  intro w
  rw [toElementMap_comp, toElementMap_paired, toElementMap_proj₀, fst_pair]

theorem proj₁_comp_paired (f : ApproximableMap V₂ V₀) (g : ApproximableMap V₂ V₁) :
    (proj₁ V₀ V₁).comp (paired f g) = g := by
  apply ext_of_toElementMap
  intro w
  rw [toElementMap_comp, toElementMap_paired, toElementMap_proj₁, snd_pair]

theorem proposition_3_4 :
    (∀ (f : ApproximableMap V₂ V₀) (g : ApproximableMap V₂ V₁),
      (proj₀ V₀ V₁).comp (paired f g) = f ∧ (proj₁ V₀ V₁).comp (paired f g) = g) ∧
    (∀ (h : ApproximableMap V₂ (prod V₀ V₁)),
      paired ((proj₀ V₀ V₁).comp h) ((proj₁ V₀ V₁).comp h) = h) ∧
    (∀ (f : ApproximableMap V₂ V₀) (g : ApproximableMap V₂ V₁) (w : V₂.Element),
      (paired f g).toElementMap w = pair (f.toElementMap w) (g.toElementMap w)) :=
  ⟨fun f g => ⟨proj₀_comp_paired f g, proj₁_comp_paired f g⟩, paired_proj,
    toElementMap_paired⟩

end
end DomainTheory.NeighbourhoodSystems
end
```

PROPOSITION 3.4. The mappings p_0, p_1 and $\langle f, g\rangle$ are approximable mappings, provided f and g are, and we have:

(i) $p_0 \circ \langle f, g\rangle = f$ and $p_1 \circ \langle f, g\rangle = g$.

Moreover, for $z \in |\mathcal{D}_0 \times \mathcal{D}_1|$, we have:

(ii) $p_0(z) = z_0$ and $p_1(z) = z_1$,

in the notation of the proof of 3.2. Further if $h : \mathcal{D}_2 \to \mathcal{D}_0 \times \mathcal{D}_1$ is any approximable mapping, then

(iii) $h = \langle p_0 \circ h, p_1 \circ h \rangle$.

Moreover, for all $w \in |\mathcal{D}_2|$, we have:

(iv) $\langle f, g \rangle(w) = \langle f(w), g(w) \rangle$,

where again on the right-hand side the notation of the proof of 3.2 is used. □

The proof of this result is left as an exercise. Note the consequence that there is a one-one correspondence between pairs of approximable mappings $f : \mathcal{D}_2 \to \mathcal{D}_0$ and $g : \mathcal{D}_2 \to \mathcal{D}_1$ and mappings $h : \mathcal{D}_2 \to \mathcal{D}_0 \times \mathcal{D}_1$. It is clear that we generalize all this to products

$$\mathcal{D}_0 \times \mathcal{D}_1 \times \cdots \times \mathcal{D}_{n-1}$$

of several systems.

The product construct also neatly explains functions of several variables. In Exercise 2.19 we used the informal notation

$$f : \mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}_2$$

and suggested regarding f as a ternary relation

$$X, Y \; f \; Z.$$

But now with $\mathcal{D}_0 \times \mathcal{D}_1$ given an independent meaning, all we have to do is to regard f as a binary relation with

$$(X, Y) \; f \; Z$$

equivalent to the old relationship. We can also employ an element-wise notation as in $f(\langle x, y \rangle)$, which can more easily be written $f(x, y)$. Similar remarks apply to functions of more than two arguments.

We have discussed several times what it means for a function $f(x)$ to come from an approximable mapping. It is interesting to ask the analogous question for functions of several arguments.

3.4.6 Theorem 3.5 — separate approximability

Theorem_3_5.lean

```
module
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_19

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Lemma_3_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Definition_3_3
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_2
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem
variable {α β ? ? : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
```

```
variable {V₂ : NeighborhoodSystem ?}
open ApproximableMap

def ofMap₂ (f : ApproximableMap₂ V₀ V₁ V₂) : ApproximableMap (prod V₀ V₁) V₂ where
  rel W Z := (prod V₀ V₁).mem W ∧ f.rel (Sum.inl ^-1' W) (Sum.inr ^-1' W) Z
  rel_dom h := h.1
  rel_cod h := f.rel_cod h.2
  master_rel := by
    refine ⟨(prod V₀ V₁).master_mem, ?_⟩
    simpa using f.master_rel
  inter_right := by rintro W Z Z' ⟨hW, hrel⟩ ⟨_, hrel'⟩; exact ⟨hW, f.inter_right hrel
    hrel'⟩
  mono := by
    rintro W W₂ Z Z' ⟨_, hrel⟩ hW₂W hZZ' hW₂ hZ'
    have hinl : Sum.inl ^-1' W₂ ⊆ Sum.inl ^-1' W := Set.preimage_mono hW₂W
    have hinr : Sum.inr ^-1' W₂ ⊆ Sum.inr ^-1' W := Set.preimage_mono hW₂W
    obtain ⟨A, B, hA, hB, rfl⟩ := hW₂
    rw [inl_preimage_prodNbhd] at hinl
    rw [inr_preimage_prodNbhd] at hinr
    refine ⟨⟨A, B, hA, hB, rfl⟩, ?_⟩
    rw [inl_preimage_prodNbhd, inr_preimage_prodNbhd]
    exact f.mono hrel hinl hinr hZZ' hA hB hZ'

def toMap₂ (f : ApproximableMap (prod V₀ V₁) V₂) : ApproximableMap₂ V₀ V₁ V₂ where
  rel X Y Z := f.rel (prodNbhd X Y) Z
  rel_dom₀ h := (prod_mem_prodNbhd_iff.mp (f.rel_dom h)).1
  rel_dom₁ h := (prod_mem_prodNbhd_iff.mp (f.rel_dom h)).2
  rel_cod h := f.rel_cod h
  master_rel := f.master_rel
  inter_right h h' := f.inter_right h h'
  mono := by
    rintro X X' Y Y' Z Z' hrel hX'X hY'Y hZZ' hX' hY' hZ'
    exact f.mono hrel (prodNbhd_subset_iff.mpr ⟨hX'X, hY'Y⟩) hZZ'
      (prod_mem_prodNbhd hX' hY') hZ'

theorem ofMap₂_toMap₂ (f : ApproximableMap (prod V₀ V₁) V₂) : ofMap₂ (toMap₂ f) = f :=
    by
  apply ApproximableMap.ext
  intro W Z
  show (prod V₀ V₁).mem W ∧ f.rel (prodNbhd (Sum.inl ^-1' W) (Sum.inr ^-1' W)) Z ↔ _
  constructor
  · rintro ⟨hW, hrel⟩; rwa [← prodNbhd_preimage hW] at hrel
  · intro hrel
    exact ⟨f.rel_dom hrel, by rwa [← prodNbhd_preimage (f.rel_dom hrel)]⟩

theorem ApproximableMap₂.ext {f g : ApproximableMap₂ V₀ V₁ V₂}
    (h : ∀ X Y Z, f.rel X Y Z ↔ g.rel X Y Z) : f = g := by
  obtain ⟨rf, _, _, _, _, _, _⟩ := f
  obtain ⟨rg, _, _, _, _, _, _⟩ := g
  have : rf = rg := by funext X Y Z; exact propext (h X Y Z)
  subst this; rfl

theorem toMap₂_ofMap₂ (f : ApproximableMap₂ V₀ V₁ V₂) : toMap₂ (ofMap₂ f) = f := by
  apply ApproximableMap₂.ext
  intro X Y Z
  show (prod V₀ V₁).mem (prodNbhd X Y) ∧ f.rel _ _ Z ↔ _
```

```
  rw [inl_preimage_prodNbhd, inr_preimage_prodNbhd]
  constructor
  · rintro ⟨_, hrel⟩; exact hrel
  · intro hrel
    exact ⟨prod_mem_prodNbhd (f.rel_dom₀ hrel) (f.rel_dom₁ hrel), hrel⟩

def map₂Equiv (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) (V₂ :
    NeighborhoodSystem ?) :
    ApproximableMap (prod V₀ V₁) V₂ ≃ ApproximableMap₂ V₀ V₁ V₂ where
  toFun := toMap₂
  invFun := ofMap₂
  left_inv := ofMap₂_toMap₂
  right_inv := toMap₂_ofMap₂

theorem toElementMap₂_toMap₂ (f : ApproximableMap (prod V₀ V₁) V₂) (x : V₀.Element) (y :
     V₁.Element) :
    (toMap₂ f).toElementMap₂ x y = f.toElementMap (pair x y) := by
  apply Element.ext
  intro Z
  constructor
  · rintro ⟨X, Y, hX, hY, hrel⟩
    exact ⟨prodNbhd X Y, ⟨X, Y, hX, hY, rfl⟩, hrel⟩
  · rintro ⟨W, ⟨X, Y, hX, hY, rfl⟩, hrel⟩
    exact ⟨X, Y, hX, hY, hrel⟩

end
end DomainTheory.NeighbourhoodSystems
end
```

THEOREM 3.5. An elementwise function

$$f : |D_0 \times D_1| \to |D_2|$$

of two arguments comes from an approximable mapping iff for each fixed $a \in |D_0|$ and each fixed $b \in |D_1|$ the transformations

$$x \mapsto f(x, b) \quad \text{and} \quad y \mapsto f(a, y)$$

come from approximable mappings of one argument.

Proof: As this is the first time we have had to deal with constants in functions, a lemma is useful.

3.4.7 Lemma 3.6 — constant functions

LEMMA 3.6. Given $b \in |D_1|$, the constant function

$$b : |D_0| \to |D_1|$$

where $b(x) = b$ for all $x \in |D_0|$, comes from the approximable mapping such that

$$X \; b \; Y \quad \text{iff} \quad Y \in b,$$

for all $X \in D_0$ and $Y \in D_1$. □

There is no real confusion here in using "b" both for function and value. Returning, then, to the proof of 3.5, we see that the reason that $x \mapsto f(x, b)$ comes from an approximable mapping is that the mapping in

question is the composition of two approximable mappings, namely $f \circ \langle I_{D_0}, b\rangle$. Clearly we can interchange the rôles of D_0 and D_1 to get at $y \mapsto f(a, y)$.

Conversely, assume that both these functions come from approximable mappings no matter the choice of a and b. Clearly the mapping to determine f is the relation from $X \cup Y$ to Z where

$$Z \in f(\uparrow X, \uparrow Y) = f(\uparrow (X \cup Y)).$$

To prove that this determines f we calculate by the formula of Exercise 2.9:

$$\begin{aligned} f(x,y) &= \bigcup\{f(\uparrow X, y) \mid X \in x\} \\ &= \bigcup\{\bigcup\{f(\uparrow X, \uparrow Y) \mid Y \in y\} \mid X \in x\} \\ &= \bigcup\{f(\uparrow X, \uparrow Y) \mid X \in x \text{ and } Y \in y\} \\ &= \bigcup\{f(\uparrow (X \cup Y)) \mid (X \cup Y) \in \langle x, y\rangle\}. \end{aligned}$$

And, again by 2.9, this is what was needed. □

Said more informarily, a function of several arguments is approximable in all the variables *jointly* if it is approximable in each of the variables *separately*.

The type of argument used in 3.5 in the first half of the proof also provides a generalization of 2.6 to functions of several arguments. When we form a function like

$$f(g(x, z, \ldots), h(y, x, \ldots), k(z, w, \ldots), \ldots)$$

from given functions $f, g, h, k, \ldots$; we call the process *substitution*.

Lemma_3_6.lean

```
module
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_2

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Definition_3_1
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem
variable {α β ? ? : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
open ApproximableMap

def constMap (V₀ : NeighborhoodSystem α) (b : V₁.Element) : ApproximableMap V₀ V₁ where
  rel X Y := V₀.mem X ∧ b.mem Y
  rel_dom h := h.1
  rel_cod h := b.sub h.2
  master_rel := ⟨V₀.master_mem, b.master_mem⟩
  inter_right := by rintro X Y Y' ⟨hX, hY⟩ ⟨_, hY'⟩; exact ⟨hX, b.inter_mem hY hY'⟩
  mono := by
    rintro X X' Y Y' ⟨_, hY⟩ _ hYY' hX' hY'
    exact ⟨hX', b.up_mem hY hY' hYY'⟩

@[simp] theorem constMap_rel {b : V₁.Element} {X : Set α} {Y : Set β} :
```

```
    (constMap V₀ b).rel X Y ↔ V₀.mem X ∧ b.mem Y := Iff.rfl

@[simp] theorem toElementMap_constMap (b : V₁.Element) (x : V₀.Element) :
    (constMap V₀ b).toElementMap x = b := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨X, _, _, hbY⟩; exact hbY
  · intro hbY; exact ⟨V₀.master, x.master_mem, V₀.master_mem, hbY⟩

end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.8 Proposition 3.7 — closure under substitution

PROPOSITION 3.7. The functions of several arguments between domains coming from approximable mappings are closed under substitution.

Proof: An example will establish the method. Suppose there are four variables involved taking values in domains provided by systems D_0, D_1, D_2, D_3. We might have a substitution like:

$$f(g(x_0, x_1), h(x_1, x_2), k(x_3, x_0, x_2)).$$

Here it might be that the values of the functions inside come from quite other systems; for instance,

$$k : D_3 \times D_0 \times D_2 \to D_4$$

might be possible. By using projections

$$p_i : D_0 \times D_1 \times D_2 \times D_3 \to D_i,$$

where $i < 4$, we can assure that we have several functions all on the same product; thus,

$$k \cdot \langle p_3, p_0, p_2 \rangle : D_0 \times D_1 \times D_2 \times D_3 \to D_4.$$

Now no matter on what domains f is defined, the following composition makes sense:

$$f \circ \langle g \circ \langle p_0, p_1 \rangle, h \circ \langle p_1, p_2 \rangle, k \circ \langle p_3, p_0, p_2 \rangle \rangle;$$

and in fact this is the desired function. Writing it this way makes it clear that the function comes from an approximable mapping: we apply 3.3 (generalized, of course, to products with several terms) to construe the parts between brackets $\langle$ and $\rangle$ as approximable mappings, and then by this trick the composition $\circ$ is the ordinary composition of 2.6. □

It has to be admitted that there is a slight point overlooked in forming products like $D \times D$ with two identical domains. This is discussed in Exercise 3.14, invoking explicit isomorphisms.

The construct that makes the whole theory of domains work so smoothly is the function-space construct: it is possible to regard functions as *objects* which form a domain. Look back at Definition 2.1 and compare it with the original definition of element in 1.6. There are obvious formal similarities, except that filters are sets of neighbourhoods and mappings are sets of pairs of neighbourhoods (relations). But as we saw in 1.10

it is possible to turn the filters into tokens via a simple definition of neighbourhood. We apply the same kind of definition to the mappings.

Proposition_3_7.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_4
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_5
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem
variable {α β ? ? : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
variable {V₂ : NeighborhoodSystem ?}
open ApproximableMap
variable {V₃ : NeighborhoodSystem ?}

theorem substitution_toElementMap (F : ApproximableMap (prod V₀ V₁) V₂)
    (a : ApproximableMap V₃ V₀) (b : ApproximableMap V₃ V₁) (w : V₃.Element) :
    (F.comp (paired a b)).toElementMap w
      = (toMap₂ F).toElementMap₂ (a.toElementMap w) (b.toElementMap w) := by
  rw [toElementMap_comp, toElementMap_paired, toElementMap₂_toMap₂]
end

end DomainTheory.NeighbourhoodSystems
end
```

3.4.9 Definition 3.8 — function space

DEFINITION 3.8. Given neighbourhood systems D_0 and D_1, the *function space* $(D_0 \to D_1)$ is the system whose set of tokens is the set of approximable mappings of Definition 2.1 and whose neighbourhoods are finite non-empty intersections of sets of the form

$$[X, Y] = \{f : D_0 \to D_1 \mid X\, f Y\},$$

where $X \in D_0$ and $Y \in D_1$. □

We have been calling our mappings "approximable" for a long time now without saying exactly how they can be approximated! Definition 3.8 supplies the missing key, because once a domain has been defined, then the general theory gives an explicit meaning to the word approximation. We still have to verify, however, that the mappings do correspond to the elements of the domain.

Definition_3_8.lean

```
module
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.bot

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Lemma_3_6
```

```
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
variable {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

instance : PartialOrder (ApproximableMap V₀ V₁) where
  le f g := ∀ X Y, f.rel X Y → g.rel X Y
  le_refl _ _ _ h := h
  le_trans _ _ _ h1 h2 X Y h := h2 X Y (h1 X Y h)
  le_antisymm f g h1 h2 := ApproximableMap.ext fun X Y => ⟨h1 X Y, h2 X Y⟩

def step (X : Set α) (Y : Set β) : Set (ApproximableMap V₀ V₁) := {f | f.rel X Y}

@[simp] theorem mem_step {X : Set α} {Y : Set β} {f : ApproximableMap V₀ V₁} :
    f ∈ step X Y ↔ f.rel X Y := Iff.rfl

def stepFun (L : List (Set α × Set β)) : Set (ApproximableMap V₀ V₁) :=
  {f | ∀ p ∈ L, f.rel p.1 p.2}

@[simp] theorem mem_stepFun {L : List (Set α × Set β)} {f : ApproximableMap V₀ V₁} :
    f ∈ stepFun L ↔ ∀ p ∈ L, f.rel p.1 p.2 := Iff.rfl

@[simp] theorem stepFun_nil : (stepFun [] : Set (ApproximableMap V₀ V₁)) = Set.univ :=
    by
  ext f; simp

theorem stepFun_append (L L' : List (Set α × Set β)) :
    (stepFun (L ++ L') : Set (ApproximableMap V₀ V₁)) = stepFun L ∩ stepFun L' := by
  ext f
  simp only [mem_stepFun, List.mem_append, Set.mem_inter_iff]
  constructor
  · intro h; exact ⟨fun p hp => h p (Or.inl hp), fun p hp => h p (Or.inr hp)⟩
  · rintro ⟨hL, hL'⟩ p (hp | hp)
    · exact hL p hp
    · exact hL' p hp

theorem stepFun_cons (p : Set α × Set β) (L : List (Set α × Set β)) :
    (stepFun (p :: L) : Set (ApproximableMap V₀ V₁)) = step p.1 p.2 ∩ stepFun L := by
  ext f
  simp only [mem_stepFun, List.mem_cons, Set.mem_inter_iff, mem_step]
  constructor
  · intro h; exact ⟨h p (Or.inl rfl), fun q hq => h q (Or.inr hq)⟩
  · rintro ⟨hp, hrest⟩ q (rfl | hq)
    · exact hp
    · exact hrest q hq

theorem stepFun_singleton (X : Set α) (Y : Set β) :
    (stepFun [(X, Y)] : Set (ApproximableMap V₀ V₁)) = step X Y := by
  rw [stepFun_cons, stepFun_nil, Set.inter_univ]

@[simp] theorem step_master_eq : (step V₀.master V₁.master : Set (ApproximableMap V₀ V₁
    )) = Set.univ := by
  ext f; simpa using f.master_rel
```

```
theorem stepFun_up_closed {L : List (Set α × Set β)} {f f' : ApproximableMap V₀ V₁}
    (hf : f ∈ stepFun L) (hff' : f ≤ f') : f' ∈ stepFun L := by
  intro p hp
  exact hff' p.1 p.2 (hf p hp)

def interYs (m : Set β) : List (Set α × Set β) → Set α → Set β
  | [], _ => m
  | p :: L, X => {z | X ⊆ p.1 → z ∈ p.2} ∩ interYs m L X

@[simp] theorem interYs_nil (m : Set β) (X : Set α) : interYs m [] X = m := rfl

theorem interYs_cons (m : Set β) (p : Set α × Set β) (L : List (Set α × Set β)) (X :
    Set α) :
    interYs m (p :: L) X = {z | X ⊆ p.1 → z ∈ p.2} ∩ interYs m L X := rfl

theorem mem_interYs {m : Set β} {L : List (Set α × Set β)} {X : Set α} {z : β} :
    z ∈ interYs m L X ↔ z ∈ m ∧ ∀ p ∈ L, X ⊆ p.1 → z ∈ p.2 := by
  induction L with
  | nil => simp
  | cons p L ih =>
    rw [interYs_cons]
    simp only [Set.mem_inter_iff, Set.mem_ofPred_eq, ih, List.mem_cons]
    constructor
    · rintro ⟨hp, hm, hL⟩
      refine ⟨hm, ?_⟩
      rintro q (rfl | hq) hXq
      · exact hp hXq
      · exact hL q hq hXq
    · rintro ⟨hm, hall⟩
      exact ⟨fun hXp => hall p (Or.inl rfl) hXp, hm,
        fun q hq hXq => hall q (Or.inr hq) hXq⟩

theorem interYs_antitone {m : Set β} {L : List (Set α × Set β)} {X X' : Set α} (h : X'
    ⊆ X) :
    interYs m L X' ⊆ interYs m L X := by
  intro z hz
  rw [mem_interYs] at hz ⊢
  exact ⟨hz.1, fun p hp hXp => hz.2 p hp (h.trans hXp)⟩

theorem interYs_subset_master {m : Set β} {L : List (Set α × Set β)} {X : Set α} :
    interYs m L X ⊆ m := fun _ hz => (mem_interYs.mp hz).1

theorem interYs_subset_of_mem {m : Set β} {L : List (Set α × Set β)} {p : Set α × Set
    β}
    (hp : p ∈ L) : interYs m L p.1 ⊆ p.2 :=
  fun _ hz => (mem_interYs.mp hz).2 p hp subset_rfl

def leastMap (L : List (Set α × Set β)) (_hL : ∀ p ∈ L, V₀.mem p.1 ∧ V₁.mem p.2)
    (hcons : ∀ {X}, V₀.mem X → V₁.mem (interYs V₁.master L X)) : ApproximableMap V₀ V₁
    where
  rel X Y := V₀.mem X ∧ V₁.mem Y ∧ interYs V₁.master L X ⊆ Y
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨V₀.master_mem, V₁.master_mem, interYs_subset_master⟩
  inter_right := by
```

```
    rintro X Y Y' ⟨hX, hY, hsub⟩ ⟨_, hY', hsub'⟩
    exact ⟨hX, V₁.inter_mem hY hY' (hcons hX) (Set.subset_inter hsub hsub'),
      Set.subset_inter hsub hsub'⟩
  mono := by
    rintro X X' Y Y' ⟨_, _, hsub⟩ hX'X hYY' hX' hY'
    exact ⟨hX', hY', (interYs_antitone hX'X).trans (hsub.trans hYY')⟩

@[simp] theorem leastMap_rel {L : List (Set α × Set β)}
    {hL : ∀ p ∈ L, V₀.mem p.1 ∧ V₁.mem p.2}
    {hcons : ∀ {X}, V₀.mem X → V₁.mem (interYs V₁.master L X)} {X : Set α} {Y : Set β}
    :
    (leastMap L hL hcons).rel X Y ↔ V₀.mem X ∧ V₁.mem Y ∧ interYs V₁.master L X ⊆ Y :=
    Iff.rfl

def funSpace (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    NeighborhoodSystem (ApproximableMap V₀ V₁) where
  mem W := (∃ L : List (Set α × Set β), (∀ p ∈ L, V₀.mem p.1 ∧ V₁.mem p.2) ∧ W =
    stepFun L)
    ∧ W.Nonempty
  master := Set.univ
  master_nonempty := ⟨constMap V₀ V₁.bot, Set.mem_univ _⟩
  master_mem := ⟨⟨[], by simp, stepFun_nil.symm⟩, ⟨constMap V₀ V₁.bot, Set.mem_univ _⟩⟩
  inter_mem := by
    rintro W W' Z ⟨⟨L, hL, rfl⟩, _⟩ ⟨⟨L', hL', rfl⟩, _⟩ ⟨_, hZne⟩ hZsub
    refine ⟨⟨L ++ L', ?_, (stepFun_append _ _).symm⟩, hZne.mono hZsub⟩
    intro p hp
    rcases List.mem_append.mp hp with h | h
    · exact hL p h
    · exact hL' p h
  sub_master := fun _ => Set.subset_univ _

@[simp] theorem funSpace_master : (funSpace V₀ V₁).master = Set.univ := rfl

theorem funSpace_mem_iff {W : Set (ApproximableMap V₀ V₁)} :
    (funSpace V₀ V₁).mem W ↔
      (∃ L : List (Set α × Set β), (∀ p ∈ L, V₀.mem p.1 ∧ V₁.mem p.2) ∧ W = stepFun L)
        ∧ W.Nonempty := Iff.rfl

theorem funSpace_mem_up_closed {W : Set (ApproximableMap V₀ V₁)} (hW : (funSpace V₀ V₁)
    .mem W)
    {f f' : ApproximableMap V₀ V₁} (hf : f ∈ W) (hff' : f ≤ f') : f' ∈ W := by
  obtain ⟨⟨L, _, rfl⟩, _⟩ := hW
  exact stepFun_up_closed hf hff'

theorem step_inter_right {X : Set α} {Y Y' : Set β} (hY : V₁.mem Y) (hY' : V₁.mem Y') :
    (step X Y ∩ step X Y' : Set (ApproximableMap V₀ V₁)) = step X (Y ∩ Y') := by
  ext f
  simp only [Set.mem_inter_iff, mem_step]
  constructor
  · rintro ⟨h, h'⟩; exact f.inter_right h h'
  · intro h
    exact ⟨f.mono h subset_rfl Set.inter_subset_left (f.rel_dom h) hY,
           f.mono h subset_rfl Set.inter_subset_right (f.rel_dom h) hY'⟩

theorem step_mem {X : Set α} {Y : Set β} (hX : V₀.mem X) (hY : V₁.mem Y) :
    (funSpace V₀ V₁).mem (step X Y) := by
```

```
  refine ⟨⟨[(X, Y)], ?_, (stepFun_singleton X Y).symm⟩,
    ⟨constMap V₀ (V₁.principal hY), ?_⟩⟩
  · intro p hp; rw [List.mem_singleton] at hp; subst hp; exact ⟨hX, hY⟩
  · show (constMap V₀ (V₁.principal hY)).rel X Y
    exact ⟨hX, hY, subset_rfl⟩

theorem mem_stepFun_iff (φ : (funSpace V₀ V₁).Element) {L : List (Set α × Set β)}
    (hL : ∀ p ∈ L, V₀.mem p.1 ∧ V₁.mem p.2) :
    φ.mem (stepFun L) ↔ ∀ p ∈ L, φ.mem (step p.1 p.2) := by
  induction L with
  | nil => simp only [stepFun_nil, List.not_mem_nil, IsEmpty.forall_iff, implies_true,
     iff_true]
           exact φ.master_mem
  | cons p L ih =>
    rw [stepFun_cons]
    have hp := hL p (List.mem_cons.mpr (Or.inl rfl))
    have hLtail : ∀ q ∈ L, V₀.mem q.1 ∧ V₁.mem q.2 :=
      fun q hq => hL q (List.mem_cons.mpr (Or.inr hq))
    constructor
    · intro hmem
      have hstep : φ.mem (step p.1 p.2) :=
        φ.up_mem hmem (step_mem hp.1 hp.2) Set.inter_subset_left
      have hne : (step p.1 p.2 ∩ stepFun L).Nonempty := (φ.sub hmem).2
      have htail : φ.mem (stepFun L) :=
        φ.up_mem hmem ⟨⟨L, hLtail, rfl⟩, hne.mono Set.inter_subset_right⟩ Set.
    inter_subset_right
      intro q hq
      rcases List.mem_cons.mp hq with rfl | hq
      · exact hstep
      · exact (ih hLtail).mp htail q hq
    · intro hall
      have hstep : φ.mem (step p.1 p.2) := hall p (List.mem_cons.mpr (Or.inl rfl))
      have htail : φ.mem (stepFun L) :=
        (ih hLtail).mpr (fun q hq => hall q (List.mem_cons.mpr (Or.inr hq)))
      exact φ.inter_mem hstep htail

theorem step_subset {X X' : Set α} {Y Y' : Set β} (hX' : V₀.mem X') (hY' : V₁.mem Y')
    (hX'X : X' ⊆ X) (hYY' : Y ⊆ Y') : (step X Y : Set (ApproximableMap V₀ V₁)) ⊆ step
    X' Y' := by
  intro f hf
  exact f.mono hf hX'X hYY' hX' hY'

end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.10 Proposition 3.9 — consistent step neighbourhoods

PROPOSITION 3.9. Let neighbourhoods $X_i \in D_0$ and $Y_i \in D_1$ be given for $i < n$. Then the set of $[X_i, Y_i]$ for $i < n$ is consistent in $(D_0 \to D_1)$ iff the following condition holds:

(i) whenever $I \subseteq \{0, 1, \ldots, n-1\}$ and $\{X_i \mid i \in I\}$ is consistent in D_0, then $\{Y_i \mid i \in I\}$ must be consistent in D_1.

Moreover, when consistency holds, the least approximable mapping f_0 belonging to the intersection of the $[X_i, Y_i]$ is defined by:

(ii) $X f_0 Y$ iff $\bigcap\{Y_i \mid X \subseteq X_i\} \subseteq Y$ for $X \in D_0$ and $Y \in D_1$.

Proof: Suppose the $[X_i, Y_i]$ are consistent in $(D_0 \to D_1)$. Since the function space is being defined outright as a positive system, consistency means

$$f \in \bigcap\{[X_i, Y_i] \mid i < n\}$$

for some $f : D_0 \to D_1$. Now, with f in hand, let us check condition (i). Suppose $\{X_i \mid i \in I\}$ is consistent. This means

$$x \in \bigcap\{[X_i] \mid i \in I\}$$

for some $x \in |D_0|$. Suppose $i \in I$, so $x \in [X_i]$. Since $X_i f Y_i$ holds, $f(x) \in [Y_i]$. This means, therefore, that

$$f(x) \in \bigcap\{[Y_i] \mid i \in I\},$$

and so $\{Y_i \mid i \in I\}$ is consistent.

For the converse, suppose (i) is the case. We take (ii) as the definition of a mapping and remark that for an arbitrary $X \in D_0$, the set $\{X_i \mid X \subseteq X_i\}$ is automatically consistent in D_0. By our assumption, the set $\{Y_i \mid X \subseteq X_i\}$ is therefore consistent. This means that

$$\bigcap\{Y_i \mid X \subseteq X_i\} \in D_1.$$

(Keep in mind that i is restricted to those $i < n$, and there are only finitely many neighbourhoods being considered here.) It is thus almost immediate that the relation f_0 defined by (ii) satisfies conditions of 2.1 and so is an approximable mapping $f_0 : D_0 \to D_1$. By construction

$$X_i f_0 Y_i$$

holds trivially for all $i < n$; therefore,

$$f_0 \in \bigcap\{[X_i, Y_i] \mid i < n\}$$

and the desired consistency is established.

Finally suppose that f is any mapping in the neighbourhood under discussion; this means $X_i f Y_i$ holds for all $i < n$. Suppose $X f_0 Y$ holds. We have for $X \subseteq X_i$, $X f Y_i$; so

$$X f \bigcap\{Y_i \mid X \subseteq X_i\} \subseteq Y.$$

Thus, $X f Y$ follows; hence, as relations, $f_0 \subseteq f$. In other words f_0 is the minimal element of the neighbourhood. □

We note that, as a consequence of what we have just proved, when the neighbourhood is consistent, then

$$\bigcap\{[X_i, Y_i] \mid i < n\} \subseteq [X, Y]$$

is exactly equivalent to

$$\bigcap\{Y_i \mid X \subseteq X_i\} \subseteq Y.$$

Note also that a single neighbourhood $[X_0, Y_0]$ is always consistent since it contains the *constant mapping* k where

$$XkY \text{ iff } Y_0 \subseteq Y,$$

for all $X \in \mathcal{D}_0$ and $Y \in \mathcal{D}_1$. Some other simple observations about these neighbourhoods are just translations of the conditions of Definition 2.1:

$$[\Delta_0, \Delta_1] = |\mathcal{D}_0 \to \mathcal{D}_1|;$$

$$[X, Y] \cap [X, Y'] = [X, Y \cap Y']; \text{ and}$$

$$X' \subseteq X \text{ and } Y \subseteq Y' \text{ imply } [X, Y] \subseteq [X', Y'],$$

for all $X, X' \in \mathcal{D}_0$ and $Y, Y' \in \mathcal{D}_1$. We are now ready to prove the main result about the construct.

Proposition_3_9.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Definition_3_8
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
variable {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

theorem leastMap_mem_stepFun {L : List (Set α × Set β)} (hL : ∀ p ∈ L, V₀.mem p.1 ∧ V₁
    .mem p.2)
    (hcons : ∀ {X}, V₀.mem X → V₁.mem (interYs V₁.master L X)) : leastMap L hL hcons ∈
     stepFun L := by
  intro p hp
  exact ⟨(hL p hp).1, (hL p hp).2, interYs_subset_of_mem hp⟩

theorem rel_interYs {L : List (Set α × Set β)} {f : ApproximableMap V₀ V₁} (hf : f ∈
    stepFun L)
    {X : Set α} (hX : V₀.mem X) : f.rel X (interYs V₁.master L X) := by
  induction L with
  | nil =>
    rw [interYs_nil]
    exact f.mono f.master_rel (V₀.sub_master hX) subset_rfl hX V₁.master_mem
  | cons p L ih =>
    have hftail : f ∈ stepFun L := fun q hq => hf q (List.mem_cons.mpr (Or.inr hq))
    have htail := ih hftail
    by_cases hXp : X ⊆ p.1
    · have hp : f.rel p.1 p.2 := hf p (List.mem_cons.mpr (Or.inl rfl))
      have hXp2 : f.rel X p.2 := f.mono hp hXp subset_rfl hX (f.rel_cod hp)
      have heq : interYs V₁.master (p :: L) X = p.2 ∩ interYs V₁.master L X := by
```

```
        rw [interYs_cons]; ext z
        simp only [Set.mem_inter_iff, Set.mem_ofPred_eq]
        exact ⟨fun ⟨h1, h2⟩ => ⟨h1 hXp, h2⟩, fun ⟨h1, h2⟩ => ⟨fun _ => h1, h2⟩⟩
      rw [heq]; exact f.inter_right hXp2 htail
    · have heq : interYs V₁.master (p :: L) X = interYs V₁.master L X := by
        rw [interYs_cons]; ext z
        simp only [Set.mem_inter_iff, Set.mem_ofPred_eq]
        exact ⟨fun h => h.2, fun h => ⟨fun hc => absurd hc hXp, h⟩⟩
      rw [heq]; exact htail

theorem leastMap_le {L : List (Set α × Set β)} (hL : ∀ p ∈ L, V₀.mem p.1 ∧ V₁.mem p.2)
    (hcons : ∀ {X}, V₀.mem X → V₁.mem (interYs V₁.master L X)) {f : ApproximableMap V₀
    V₁}
    (hf : f ∈ stepFun L) : leastMap L hL hcons ≤ f := by
  rintro X Y ⟨hX, hY, hsub⟩
  exact f.mono (rel_interYs hf hX) subset_rfl hsub hX hY

theorem stepFun_subset_step_iff {L : List (Set α × Set β)} (hL : ∀ p ∈ L, V₀.mem p.1 ∧
    V₁.mem p.2)
    (hcons : ∀ {X}, V₀.mem X → V₁.mem (interYs V₁.master L X)) {X : Set α} {Y : Set β}
    (hX : V₀.mem X) (hY : V₁.mem Y) :
    (stepFun L : Set (ApproximableMap V₀ V₁)) ⊆ step X Y ↔ interYs V₁.master L X ⊆ Y
    := by
  constructor
  · intro hsub
    have := hsub (leastMap_mem_stepFun hL hcons)
    exact (mem_step.mp this).2.2
  · intro hsub f hf
    exact f.mono (rel_interYs hf hX) subset_rfl hsub hX hY

end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.11 Theorem 3.10 — elements are mappings

THEOREM 3.10. Given neighbourhood systems $\mathcal{D}_0$ and $\mathcal{D}_1$, the function space system $(\mathcal{D}_0 \to \mathcal{D}_1)$ is complete in the sense that every filter in $|\mathcal{D}_0 \to \mathcal{D}_1|$ is fixed by a unique approximable mapping.

Proof: Let $f : \mathcal{D}_0 \to \mathcal{D}_1$ be an approximable mapping. By the very definition of $(\mathcal{D}_0 \to \mathcal{D}_1)$ it determines a filter by the definition:

$$\hat{f} = \{F \in (D_0 \to D_1) \mid f \in F\}.$$

Trivially $[X, Y] \in \hat{f}$ iff $f \in [X, Y]$ iff XfY; so this filter uniquely determines the relation f. What we have to show is that every filter in $|D_0 \to D_1|$ is of this form.

Suppose $\varphi \in |D_0 \to D_1|$ is any filter. A relation can be defined at once by

$$X\hat{\varphi}Y \quad \text{iff} \quad [X, Y] \in \varphi.$$

In view of the remarks we made just before stating this theorem, there is no problem in showing that $\hat{\varphi}$ is an approximable mapping. Since the neighbourhoods of the function space are in any case finite intersections of sets like $[X, Y]$, those $[X, Y] \in \varphi$ generate φ. This means that $\hat{\hat{\varphi}} = \varphi$. By definition $\hat{\hat{f}} = f$, so there

is a one-one correspondence between mappings and filters. (This correspondence is obviously inclusion preserving, too.) □

We now know just about everything about $|D_0 \to D_1|$ as a domain: the elements correspond isomorphically to the approximable mappings; the finite elements are explained completely by 3.9; and we have seen how to calculate with neighbourhoods. The final step is to relate the function space to other domains by appropriate mappings. In doing this we shall freely construe elements of $|D_0 \to D_1|$ as approximable mappings in view of 3.10.

Theorem_3_10.lean

```
module
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Definition_3_8

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
variable {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

def toApproxMap (φ : (funSpace V₀ V₁).Element) : ApproximableMap V₀ V₁ where
  rel X Y := φ.mem (step X Y)
  rel_dom := by intro X Y h; obtain ⟨f, hf⟩ := (φ.sub h).2; exact f.rel_dom hf
  rel_cod := by intro X Y h; obtain ⟨f, hf⟩ := (φ.sub h).2; exact f.rel_cod hf
  master_rel := by show φ.mem (step V₀.master V₁.master); rw [step_master_eq]; exact φ.
    master_mem
  inter_right := by
    intro X Y Y' h h'
    obtain ⟨f, hf⟩ := (φ.sub h).2
    obtain ⟨f', hf'⟩ := (φ.sub h').2
    have hY : V₁.mem Y := f.rel_cod hf
    have hY' : V₁.mem Y' := f'.rel_cod hf'
    show φ.mem (step X (Y ∩ Y'))
    rw [← step_inter_right hY hY']
    exact φ.inter_mem h h'
  mono := by
    intro X X' Y Y' h hX'X hYY' hX' hY'
    show φ.mem (step X' Y')
    exact φ.up_mem h (step_mem hX' hY') (step_subset hX' hY' hX'X hYY')

@[simp] theorem toApproxMap_rel {φ : (funSpace V₀ V₁).Element} {X : Set α} {Y : Set β}
    :
    (toApproxMap φ).rel X Y ↔ φ.mem (step X Y) := Iff.rfl

def toFilter (f : ApproximableMap V₀ V₁) : (funSpace V₀ V₁).Element where
  mem W := (funSpace V₀ V₁).mem W ∧ f ∈ W
  sub h := h.1
  master_mem := ⟨(funSpace V₀ V₁).master_mem, Set.mem_univ f⟩
  inter_mem := by
    rintro W W' ⟨hW, hfW⟩ ⟨hW', hfW'⟩
    obtain ⟨⟨L, hL, rfl⟩, _⟩ := hW
    obtain ⟨⟨L', hL', rfl⟩, _⟩ := hW'
    refine ⟨⟨L ++ L', ?_, (stepFun_append _ _).symm⟩, ⟨f, ?_⟩⟩, ?_⟩
    · intro p hp; rcases List.mem_append.mp hp with h | h
```

```
      · exact hL p h
      · exact hL' p h
    · exact Set.mem_inter hfW hfW'
    · exact Set.mem_inter hfW hfW'
  up_mem := by rintro W W' ⟨hW, hfW⟩ hW' hWW'; exact ⟨hW', hWW' hfW⟩

@[simp] theorem mem_toFilter {f : ApproximableMap V₀ V₁} {W : Set (ApproximableMap V₀ V
    ₁)} :
    (toFilter f).mem W ↔ (funSpace V₀ V₁).mem W ∧ f ∈ W := Iff.rfl

def funSpaceEquiv (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    (funSpace V₀ V₁).Element ≃o ApproximableMap V₀ V₁ where
  toFun := toApproxMap
  invFun := toFilter
  left_inv φ := by
    apply Element.ext
    intro W
    constructor
    · rintro ⟨hWmem, hfW⟩
      obtain ⟨⟨L, hL, rfl⟩, _⟩ := hWmem
      exact (mem_stepFun_iff φ hL).mpr (fun p hp => hfW p hp)
    · intro hW
      refine ⟨φ.sub hW, ?_⟩
      obtain ⟨⟨L, hL, rfl⟩, _⟩ := φ.sub hW
      intro p hp
      exact (mem_stepFun_iff φ hL).mp hW p hp
  right_inv f := by
    apply ApproximableMap.ext
    intro X Y
    constructor
    · rintro ⟨_, hf⟩; exact hf
    · intro hf; exact ⟨step_mem (f.rel_dom hf) (f.rel_cod hf), hf⟩
  map_rel_iff' := by
    intro φ φ'
    constructor
    · intro h W hW
      obtain ⟨⟨L, hL, rfl⟩, _⟩ := φ.sub hW
      refine (mem_stepFun_iff φ' hL).mpr (fun p hp => ?_)
      exact h p.1 p.2 ((mem_stepFun_iff φ hL).mp hW p hp)
    · intro h X Y hrel
      exact h _ hrel

@[simp] theorem funSpaceEquiv_apply (φ : (funSpace V₀ V₁).Element) :
    funSpaceEquiv V₀ V₁ φ = toApproxMap φ := rfl

@[simp] theorem funSpaceEquiv_symm_apply (f : ApproximableMap V₀ V₁) :
    (funSpaceEquiv V₀ V₁).symm f = toFilter f := rfl

theorem funSpace_mem_inter {W W' : Set (ApproximableMap V₀ V₁)}
    (hW : (funSpace V₀ V₁).mem W) (hW' : (funSpace V₀ V₁).mem W') (hne : (W ∩ W').
    Nonempty) :
    (funSpace V₀ V₁).mem (W ∩ W') := by
  obtain ⟨⟨L, hL, rfl⟩, _⟩ := hW
  obtain ⟨⟨L', hL', rfl⟩, _⟩ := hW'
  refine ⟨⟨L ++ L', ?_, (stepFun_append _ _).symm⟩, hne⟩
  intro p hp
```

```
  rcases List.mem_append.mp hp with h | h
  · exact hL p h
  · exact hL' p h

end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.12 Theorem 3.11 — evaluation combinator

THEOREM 3.11. Given neighbourhood systems D_1 and D_2, there is a uniquely determined approximable mapping

$$\text{eval} : (D_1 \to D_2) \times D_1 \to D_2,$$

where for all $f : D_1 \to D_2$ and all $x \in |D_1|$ we have

(i) $\text{eval}(f, x) = f(x)$.

Proof: For $F \in (D_1 \to D_2)$ and $X \in D_1$ and $Y \in D_2$ define eval as a relation by:

$$F, X \text{ eval } Y \quad \text{iff} \quad X f Y \text{ for all } f \in F.$$

Remember that neighbourhoods in the function space are sets of approximable mappings. It is easily checked that this definition makes eval approximable. We now calculate the function values by the formula of 2.2 (i):

$$\text{eval}(f, x) = \{Y \in D_2 \mid \exists F \in (D_1 \to D_2)\, \exists X \in x.\ f \in F \text{ and } F \cup X \text{ eval } Y\}$$

Because, again by 2.2 (i), we have

$$f(x) = \{Y \in D_2 \mid \exists X \in x.\ X f Y\},$$

we can see from the definition of eval that $\text{eval}(f, x) \subseteq f(x)$. Suppose that $Y \in f(x)$. Then $X f Y$ holds for some $X \in x$. We can write $f \in [X, Y] \in (D_1 \to D_2)$ and it is clear that

$$[X, Y] \cup X \text{ eval } Y$$

holds by definition. Therefore, $Y \in \text{eval}(f, x)$, and so $f(x) \subseteq \text{eval}(f, x)$. □

This theorem is essential for our programme: it shows that in taking functions as objects the very basic operation of forming the function value is an approximable mapping. In other words we can treat the expression $f(x)$ not just as a function of x, as we have done from the start, but also as a function of f as well. The result also indicates that there are useful maps defined on domains that themselves are function spaces; we shall meet many more of these. The next theorem provides further examples.

Theorem_3_11.lean

```
module
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_10

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_5
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Lemma_3_6
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
variable {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
section
variable {V₂ : NeighborhoodSystem ?}

def eval (V₁ : NeighborhoodSystem β) (V₂ : NeighborhoodSystem ?) :
    ApproximableMap₂ (funSpace V₁ V₂) V₁ V₂ where
  rel F X Y := (funSpace V₁ V₂).mem F ∧ V₁.mem X ∧ V₂.mem Y ∧ ∀ f ∈ F, f.rel X Y
  rel_dom₀ h := h.1
  rel_dom₁ h := h.2.1
  rel_cod h := h.2.2.1
  master_rel := ⟨(funSpace V₁ V₂).master_mem, V₁.master_mem, V₂.master_mem,
    fun f _ => f.master_rel⟩
  inter_right := by
    rintro F X Y Y' ⟨hF, hX, hY, hrel⟩ ⟨_, _, hY', hrel'⟩
    obtain ⟨f, hf⟩ := (funSpace_mem_iff.mp hF).2
    refine ⟨hF, hX, ?_, fun g hg => g.inter_right (hrel g hg) (hrel' g hg)⟩
    exact f.rel_cod (f.inter_right (hrel f hf) (hrel' f hf))
  mono := by
    rintro F F' X X' Y Y' ⟨hF, hX, hY, hrel⟩ hF'F hX'X hYY' hF' hX' hY'
    exact ⟨hF', hX', hY', fun f hf => f.mono (hrel f (hF'F hf)) hX'X hYY' hX' hY'⟩

def evalMap (V₁ : NeighborhoodSystem β) (V₂ : NeighborhoodSystem ?) :
    ApproximableMap (prod (funSpace V₁ V₂) V₁) V₂ := ofMap₂ (eval V₁ V₂)

def gSection (g : ApproximableMap (prod V₀ V₁) V₂) {X : Set α} (hX : V₀.mem X) :
    ApproximableMap V₁ V₂ where
  rel Y Z := g.rel (prodNbhd X Y) Z
  rel_dom h := (prod_mem_prodNbhd_iff.mp (g.rel_dom h)).2
  rel_cod h := g.rel_cod h
  master_rel := g.rel_master (prod_mem_prodNbhd hX V₁.master_mem)
  inter_right h h' := g.inter_right h h'
  mono := by
    intro Y Y' Z Z' h hY'Y hZZ' hY' hZ'
    exact g.mono h (prodNbhd_subset_iff.mpr ⟨subset_rfl, hY'Y⟩) hZZ'
      (prod_mem_prodNbhd hX hY') hZ'

@[simp] theorem gSection_rel {g : ApproximableMap (prod V₀ V₁) V₂} {X : Set α} (hX : V₀
    .mem X)
    {Y : Set β} {Z : Set ?} : (gSection g hX).rel Y Z ↔ g.rel (prodNbhd X Y) Z := Iff.
    rfl

theorem gSection_le {g : ApproximableMap (prod V₀ V₁) V₂} {X X' : Set α}
    (hX : V₀.mem X) (hX' : V₀.mem X') (hX'X : X' ⊆ X) : gSection g hX ≤ gSection g hX'
     := by
  intro Y Z h
```

```
  have hY := (prod_mem_prodNbhd_iff.mp (g.rel_dom h)).2
  exact g.mono h (prodNbhd_subset_iff.mpr ⟨hX'X, subset_rfl⟩) subset_rfl
    (prod_mem_prodNbhd hX' hY) (g.rel_cod h)

theorem toElementMap₂_eval (φ : (funSpace V₁ V₂).Element) (x : V₁.Element) :
    (eval V₁ V₂).toElementMap₂ φ x = (toApproxMap φ).toElementMap x := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨F, X, hφF, hxX, _, hX, hY, hrel⟩
    refine ⟨X, hxX, ?_⟩
    show φ.mem (step X Y)
    exact φ.up_mem hφF (step_mem hX hY) (fun f hf => hrel f hf)
  · rintro ⟨X, hxX, hrel⟩
    have hstep : (funSpace V₁ V₂).mem (step X Y) := φ.sub hrel
    obtain ⟨f, hf⟩ := (funSpace_mem_iff.mp hstep).2
    exact ⟨step X Y, X, hrel, hxX, hstep, f.rel_dom hf, f.rel_cod hf, fun g hg => hg⟩

theorem evalMap_apply (φ : (funSpace V₁ V₂).Element) (x : V₁.Element) :
    (evalMap V₁ V₂).toElementMap (pair φ x) = (toApproxMap φ).toElementMap x := by
  rw [evalMap, ← toElementMap₂_toMap₂, toMap₂_ofMap₂, toElementMap₂_eval]

theorem toElementMap_evalMap_comp_paired (F : ApproximableMap V₀ (funSpace V₁ V₂))
    (G : ApproximableMap V₀ V₁) (w : V₀.Element) :
    ((evalMap V₁ V₂).comp (paired F G)).toElementMap w =
      (toApproxMap (F.toElementMap w)).toElementMap (G.toElementMap w) := by
  rw [toElementMap_comp, toElementMap_paired, evalMap_apply]
end

end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.13 Theorem 3.12 — currying

THEOREM 3.12. Given neighbourhood systems D_0, D_1, D_2 there is associated with every approximable mapping $g : D_0 \times D_1 \to D_2$ a uniquely determined approximable mapping

$$\text{curry}(g) : D_0 \to (D_1 \to D_2)$$

such that for $x \in |D_0|$ and $y \in |D_1|$

(i) $\text{curry}(g)(x)(y) = g(x, y)$.

Moreover we have these functional equations:

(ii) $\text{eval} \circ \langle \text{curry}(g) \circ p_0,\ p_1 \rangle = g$, and

(iii) $\text{curry}(\text{eval} \circ \langle h \circ p_0,\ p_1 \rangle) = h$,

where the $p_i : \mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}_i$ are the projection mappings and $h : \mathcal{D}_0 \to (\mathcal{D}_1 \to \mathcal{D}_2)$ is any approximable mapping. This provides an isomorphism between the domains $|\mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}_2|$ and $|\mathcal{D}_0 \to (\mathcal{D}_1 \to \mathcal{D}_2)|$ and so we can regard

$$\mathrm{curry} : (\mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}_2) \to (\mathcal{D}_0 \to (\mathcal{D}_1 \to \mathcal{D}_2))$$

as itself being an approximable mapping.

Proof: Given g as indicated, we can define $\mathrm{curry}(g)$ as a relation and as an approximable mapping by:

$$X\ \mathrm{curry}(g)\ [Y, Z] \text{ iff } X \cup Y\ g\ Z \quad \text{(but see Ex. 3.21)}$$

for all $X \in \mathcal{D}_0$, $Y \in \mathcal{D}_1$, $Z \in \mathcal{D}_2$. This is sufficient because an approximable mapping is intersective in the right-hand neighbourhood, so we know from the above exactly what $X\ \mathrm{curry}(g)\ \bigcap\{[Y_i, Z_i] \mid i < n\}$ means for all finite intersections. The remark after 3.9 is then helpful in checking that by this definition $\mathrm{curry}(g)$ satisfies the monotonicity condition and so is indeed approximable. We now calculate:

$$\begin{aligned}
\mathrm{curry}(g)(x)(y) &= \{Z \in \mathcal{D}_2 \mid \exists Y \in y.\ Y\ \mathrm{curry}(g)\ (x)\ Z\} \\
&= \{Z \in \mathcal{D}_2 \mid \exists Y \in y\ \exists X \in x.\ X\ \mathrm{curry}(g)\ [Y, Z]\} \\
&= \{Z \in \mathcal{D}_2 \mid \exists Y \in y\ \exists X \in x.\ X \cup Y\ g\ Z\} \\
&= \{Z \in \mathcal{D}_2 \mid \exists W \in \langle x, y\rangle.\ W\ g\ Z\} \\
&= g(\langle x, y\rangle) = g(x, y).
\end{aligned}$$

This proves (i). We also see, that if we take the left-hand side of (ii) and apply it to a pair $\langle x, y\rangle$, it reduces to $g(x, y)$ by virtue of (i). Thus, the two functions in (ii) are the same.

Turning to (iii), call the left-hand side k. Using (i) again, we find

$$\begin{aligned}
k(x)(y) &= \mathrm{eval} \circ \langle h \circ p_0, p_1\rangle(\langle x, y\rangle) \\
&= \mathrm{eval}(\langle h \circ p_0(\langle x, y\rangle), p_1(\langle x, y\rangle)\rangle) \\
&= \mathrm{eval}(\langle h(x), y\rangle) \\
&= h(x)(y).
\end{aligned}$$

As this is true for all $y \in |\mathcal{D}_1|$, then $k(x) = h(x)$ follows. As this is true for all $x \in |\mathcal{D}_0|$, then $k = h$ follows, and (iii) is proved.

Taking (ii) and (iii) together, it is clear that the domains $|D_0 \times D_1 \to D_2|$ and $|D_0 \to (D_1 \to D_2)|$ are in a one-one correspondence.

$$\mathrm{curry}(g) \sqsubseteq \mathrm{curry}(g') \text{ iff } g \sqsubseteq g'.$$

Hence, curry is an isomorphism, and we can invoke 2.7 to conclude that it comes from an approximable mapping. □

We close this lecture with some order-theoretic properties of function spaces that characterize inclusion and upper bounds of functions in a "pointwise" manner.

Theorem_3_12.lean

```
module
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_11

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
```

```
section
open NeighborhoodSystem ApproximableMap
variable {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
section
variable {V₂ : NeighborhoodSystem ?}

def curry (g : ApproximableMap (prod V₀ V₁) V₂) : ApproximableMap V₀ (funSpace V₁ V₂)
    where
  rel X W := ∃ hX : V₀.mem X, (funSpace V₁ V₂).mem W ∧ gSection g hX ∈ W
  rel_dom := fun ⟨hX, _⟩ => hX
  rel_cod := fun ⟨_, hW, _⟩ => hW
  master_rel := ⟨V₀.master_mem, (funSpace V₁ V₂).master_mem, Set.mem_univ _⟩
  inter_right := by
    rintro X W W' ⟨hX, hW, hmem⟩ ⟨_, hW', hmem'⟩
    exact ⟨hX, funSpace_mem_inter hW hW' ⟨gSection g hX, hmem, hmem'⟩,
      Set.mem_inter hmem hmem'⟩
  mono := by
    rintro X X' W W' ⟨hX, hW, hmem⟩ hX'X hWW' hX' hW'
    exact ⟨hX', hW', funSpace_mem_up_closed hW' (hWW' hmem) (gSection_le hX hX' hX'X)⟩

@[simp] theorem curry_rel {g : ApproximableMap (prod V₀ V₁) V₂} {X : Set α}
    {W : Set (ApproximableMap V₁ V₂)} :
    (curry g).rel X W ↔ ∃ hX : V₀.mem X, (funSpace V₁ V₂).mem W ∧ gSection g hX ∈ W :=
     Iff.rfl

theorem rel_stepFun_iff (h : ApproximableMap V₀ (funSpace V₁ V₂)) {X : Set α} (hX : V₀.
    mem X)
    {L : List (Set β × Set ?)} (hL : ∀ p ∈ L, V₁.mem p.1 ∧ V₂.mem p.2) :
    h.rel X (stepFun L) ↔ ∀ p ∈ L, h.rel X (step p.1 p.2) := by
  induction L with
  | nil =>
    simp only [stepFun_nil, List.not_mem_nil, IsEmpty.forall_iff, implies_true,
    iff_true]
    show h.rel X (funSpace V₁ V₂).master
    exact h.rel_master hX
  | cons p L ih =>
    rw [stepFun_cons]
    have hp := hL p (List.mem_cons.mpr (Or.inl rfl))
    have hLtail : ∀ q ∈ L, V₁.mem q.1 ∧ V₂.mem q.2 :=
      fun q hq => hL q (List.mem_cons.mpr (Or.inr hq))
    constructor
    · intro hmem
      have hne : (step p.1 p.2 ∩ stepFun L).Nonempty := (h.rel_cod hmem).2
      have hstep : h.rel X (step p.1 p.2) :=
        h.mono hmem subset_rfl Set.inter_subset_left hX (step_mem hp.1 hp.2)
      have htail : h.rel X (stepFun L) :=
        h.mono hmem subset_rfl Set.inter_subset_right hX
          ⟨⟨L, hLtail, rfl⟩, hne.mono Set.inter_subset_right⟩
      intro q hq
      rcases List.mem_cons.mp hq with rfl | hq
      · exact hstep
      · exact (ih hLtail).mp htail q hq
    · intro hall
      have hstep : h.rel X (step p.1 p.2) := hall p (List.mem_cons.mpr (Or.inl rfl))
      have htail : h.rel X (stepFun L) :=
        (ih hLtail).mpr (fun q hq => hall q (List.mem_cons.mpr (Or.inr hq)))
```

```
      exact h.inter_right hstep htail

def uncurry (h : ApproximableMap V₀ (funSpace V₁ V₂)) : ApproximableMap (prod V₀ V₁) V₂
    where
  rel W Z := (prod V₀ V₁).mem W ∧ h.rel (Sum.inl ^-1' W) (step (Sum.inr ^-1' W) Z)
  rel_dom h' := h'.1
  rel_cod := by
    rintro W Z ⟨_, hrel⟩
    obtain ⟨f, hf⟩ := (funSpace_mem_iff.mp (h.rel_cod hrel)).2
    exact f.rel_cod hf
  master_rel := by
    refine ⟨(prod V₀ V₁).master_mem, ?_⟩
    rw [show (prod V₀ V₁).master = prodNbhd V₀.master V₁.master from rfl,
      inl_preimage_prodNbhd, inr_preimage_prodNbhd, step_master_eq]
    exact h.master_rel
  inter_right := by
    rintro W Z Z' ⟨hW, hrel⟩ ⟨_, hrel'⟩
    obtain ⟨f, hf⟩ := (funSpace_mem_iff.mp (h.rel_cod hrel)).2
    obtain ⟨f', hf'⟩ := (funSpace_mem_iff.mp (h.rel_cod hrel')).2
    refine ⟨hW, ?_⟩
    rw [← step_inter_right (f.rel_cod hf) (f'.rel_cod hf')]
    exact h.inter_right hrel hrel'
  mono := by
    rintro W W₂ Z Z' ⟨_, hrel⟩ hW₂W hZZ' hW₂ hZ'
    have hinl : Sum.inl ^-1' W₂ ⊆ Sum.inl ^-1' W := Set.preimage_mono hW₂W
    have hinr : Sum.inr ^-1' W₂ ⊆ Sum.inr ^-1' W := Set.preimage_mono hW₂W
    obtain ⟨A, B, hA, hB, rfl⟩ := hW₂
    rw [inl_preimage_prodNbhd] at hinl ⊢
    rw [inr_preimage_prodNbhd] at hinr ⊢
    refine ⟨prod_mem_prodNbhd hA hB, ?_⟩
    exact h.mono hrel hinl (step_subset hB hZ' hinr hZZ') hA (step_mem hB hZ')

@[simp] theorem uncurry_rel {h : ApproximableMap V₀ (funSpace V₁ V₂)}
    {W : Set (α ? β)} {Z : Set ?} :
    (uncurry h).rel W Z ↔
      (prod V₀ V₁).mem W ∧ h.rel (Sum.inl ^-1' W) (step (Sum.inr ^-1' W) Z) := Iff.rfl

theorem curry_uncurry (h : ApproximableMap V₀ (funSpace V₁ V₂)) : curry (uncurry h) = h
    := by
  apply ApproximableMap.ext
  intro X W
  constructor
  · rintro ⟨hX, hW, hmem⟩
    obtain ⟨⟨L, hL, rfl⟩, _⟩ := hW
    refine (rel_stepFun_iff h hX hL).mpr (fun p hp => ?_)
    have := hmem p hp

    have hrel : (uncurry h).rel (prodNbhd X p.1) p.2 := this
    obtain ⟨_, hrel'⟩ := hrel
    rw [inl_preimage_prodNbhd, inr_preimage_prodNbhd] at hrel'
    exact hrel'
  · intro hrel
    have hX : V₀.mem X := h.rel_dom hrel
    have hW : (funSpace V₁ V₂).mem W := h.rel_cod hrel
    refine ⟨hX, hW, ?_⟩
    obtain ⟨⟨L, hL, rfl⟩, _⟩ := hW
```

```
    intro p hp
    show (uncurry h).rel (prodNbhd X p.1) p.2
    refine ⟨prod_mem_prodNbhd hX (hL p hp).1, ?_⟩
    rw [inl_preimage_prodNbhd, inr_preimage_prodNbhd]
    exact (rel_stepFun_iff h hX hL).mp hrel p hp

theorem uncurry_curry (g : ApproximableMap (prod V₀ V₁) V₂) : uncurry (curry g) = g :=
    by
  apply ApproximableMap.ext
  intro W Z
  constructor
  · rintro ⟨hW, _, _, hmem⟩
    rw [prodNbhd_preimage hW]; exact hmem
  · intro hrel
    have hW := g.rel_dom hrel
    refine ⟨hW, prod_mem_inl hW, step_mem (prod_mem_inr hW) (g.rel_cod hrel), ?_⟩
    show g.rel (prodNbhd (Sum.inl ^-1' W) (Sum.inr ^-1' W)) Z
    rwa [← prodNbhd_preimage hW]

def curryEquiv (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    (V₂ : NeighborhoodSystem ?) :
    ApproximableMap (prod V₀ V₁) V₂ ≃o ApproximableMap V₀ (funSpace V₁ V₂) where
  toFun := curry
  invFun := uncurry
  left_inv := uncurry_curry
  right_inv := curry_uncurry
  map_rel_iff' := by
    intro g g'
    constructor
    · intro hcurry W Z hrel
      have h1 : (curry g).rel (Sum.inl ^-1' W) (step (Sum.inr ^-1' W) Z) := by
        have hu : (uncurry (curry g)).rel W Z := by rw [uncurry_curry]; exact hrel
        exact hu.2
      have h2 := hcurry _ _ h1
      have hu' : (uncurry (curry g')).rel W Z := ⟨g.rel_dom hrel, h2⟩
      rw [uncurry_curry] at hu'
      exact hu'
    · intro hg X W hrel
      obtain ⟨hX, hW, hmem⟩ := hrel
      refine ⟨hX, hW, ?_⟩
      obtain ⟨⟨L, hL, rfl⟩, _⟩ := hW
      intro p hp
      have hgrel : g.rel (prodNbhd X p.1) p.2 := hmem p hp
      exact hg _ _ hgrel

theorem toElementMap_curry_apply (g : ApproximableMap (prod V₀ V₁) V₂)
    (x : V₀.Element) (y : V₁.Element) :
    (toApproxMap ((curry g).toElementMap x)).toElementMap y = g.toElementMap (pair x y
    ) := by
  apply Element.ext
  intro Z
  constructor
  · rintro ⟨Y, hyY, X, hxX, hX, _, hrel⟩
    exact ⟨prodNbhd X Y, ⟨X, Y, hxX, hyY, rfl⟩, hrel⟩
  · rintro ⟨W, ⟨X, Y, hxX, hyY, rfl⟩, hrel⟩
    exact ⟨Y, hyY, X, hxX, x.sub hxX, step_mem (y.sub hyY) (g.rel_cod hrel), hrel⟩
```

```
theorem uncurry_eq (h : ApproximableMap V₀ (funSpace V₁ V₂)) :
    uncurry h = (evalMap V₁ V₂).comp (paired (h.comp (proj₀ V₀ V₁)) (proj₁ V₀ V₁)) := by
  apply ext_of_toElementMap
  intro w
  rw [toElementMap_comp, toElementMap_paired, toElementMap_comp, toElementMap_proj₀,
    toElementMap_proj₁, evalMap_apply]
  apply Element.ext
  intro Z
  constructor
  · rintro ⟨W₀, hwW₀, hW₀, hrel⟩
    obtain ⟨X, Y, hX, hY, rfl⟩ := hW₀
    rw [inl_preimage_prodNbhd] at hrel
    rw [inr_preimage_prodNbhd] at hrel
    obtain ⟨hwX, hwY⟩ := (prod_mem_split hX hY).mp hwW₀
    exact ⟨Y, ⟨hY, hwY⟩, X, ⟨hX, hwX⟩, hrel⟩
  · rintro ⟨Y, ⟨hY, hwY⟩, X, ⟨hX, hwX⟩, hrel⟩
    refine ⟨prodNbhd X Y, (prod_mem_split hX hY).mpr ⟨hwX, hwY⟩, prod_mem_prodNbhd hX
    hY, ?_⟩
    rw [inl_preimage_prodNbhd, inr_preimage_prodNbhd]
    exact hrel

theorem curry_eval_comp (h : ApproximableMap V₀ (funSpace V₁ V₂)) :
    curry ((evalMap V₁ V₂).comp (paired (h.comp (proj₀ V₀ V₁)) (proj₁ V₀ V₁))) = h := by
  rw [← uncurry_eq, curry_uncurry]

theorem eval_comp_curry (g : ApproximableMap (prod V₀ V₁) V₂) :
    (evalMap V₁ V₂).comp (paired ((curry g).comp (proj₀ V₀ V₁)) (proj₁ V₀ V₁)) = g := by
  rw [← uncurry_eq]; exact uncurry_curry g
end

theorem ApproximableMap.le_iff {f g : ApproximableMap V₀ V₁} :
    f ≤ g ↔ ∀ X Y, f.rel X Y → g.rel X Y := Iff.rfl

end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.14 Theorem 3.13 — pointwise order of maps

THEOREM 3.13. For approximable functions $f, g : D_0 \to D_1$ we have

(i) $f \sqsubseteq g$ iff $f(x) \sqsubseteq g(x)$ for all $x \in |D_0|$.

For subsets $F \subseteq |D_0 \to D_1|$ we have

(ii) F is bounded in $|D_0 \to D_1|$ iff $\{f(x) \mid f \in F\}$ is bounded in $|D_1|$ for each $x \in |D_0|$;

and in that case for all $x \in |D_0|$:

(iii) $(\bigsqcup F)(x) = \bigsqcup\{f(x) \mid f \in F\}$.

Proof. The implication in (i) from left to right follows because evaluation is monotone in the function as well as the argument. The converse implication is a consequence of 2.2(ii).

For the proof of (ii) and (iii) we see that by (i) if F is bounded, so is every set $\{f(x) \mid f \in F\}$. For the converse direction, it is clear that (iii) defines *some* pointwise mapping; we have only to prove that it is *approximable*. The calculation that $\sqcup F$ preserves directed unions (see 2.9 and 2.11) is probably the simplest way to reach the conclusion. □

Theorem_3_13.lean

```
module
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_8
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_9
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_27
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
variable {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

def MapsBounded (F : Set (ApproximableMap V₀ V₁)) : Prop := ∃ h, ∀ f ∈ F, f ≤ h

def PointwiseBounded (F : Set (ApproximableMap V₀ V₁)) : Prop :=
  ∀ x : V₀.Element, V₁.Bounded (Set.image (fun f => f.toElementMap x) F)

theorem mapsBounded_principal {F : Set (ApproximableMap V₀ V₁)} (hF : PointwiseBounded
    F)
    {X : Set α} (hX : V₀.mem X) :
    V₁.Bounded (Set.image (fun f => f.toElementMap (V₀.principal hX)) F) :=
  hF (V₀.principal hX)

def supOnPrincipal (F : Set (ApproximableMap V₀ V₁)) (hF : PointwiseBounded F)
    (X : Set α) (hX : V₀.mem X) : V₁.Element :=
  V₁.sSup (Set.image (fun f => f.toElementMap (V₀.principal hX)) F) (
    mapsBounded_principal hF hX)

theorem supOnPrincipal_mono (F : Set (ApproximableMap V₀ V₁)) (hF : PointwiseBounded F)
    (X X' : Set α) (hX : V₀.mem X) (hX' : V₀.mem X') (hX'X : X' ⊆ X) :
    supOnPrincipal F hF X hX ≤ supOnPrincipal F hF X' hX' :=
  V₁.sSup_le _ (mapsBounded_principal hF hX) fun s hs => by
    obtain ⟨f, hf, rfl⟩ := hs
    exact (toElementMap_mono f ((V₀.principal_le_iff hX hX').mpr hX'X)).trans
      (V₁.le_sSup _ (mapsBounded_principal hF hX') ⟨f, hf, rfl⟩)

def sSupMaps (F : Set (ApproximableMap V₀ V₁)) (hF : PointwiseBounded F) :
    ApproximableMap V₀ V₁ :=
  ofMono (fun X hX => supOnPrincipal F hF X hX) (supOnPrincipal_mono F hF)

theorem le_iff_toElementMap_le {f g : ApproximableMap V₀ V₁} :
```

```
    f ≤ g ↔ ∀ x, f.toElementMap x ≤ g.toElementMap x := by
  constructor
  · intro h x Y ⟨X, hXx, hrel⟩
    exact ⟨X, hXx, h X Y hrel⟩
  · intro h X Y hrel
    have hX : V₀.mem X := f.rel_dom hrel
    rw [f.rel_iff_mem_principal hX] at hrel
    rw [g.rel_iff_mem_principal hX]
    exact h (V₀.principal hX) Y hrel

theorem le_sSupMaps {F : Set (ApproximableMap V₀ V₁)} (hF : PointwiseBounded F)
    {f : ApproximableMap V₀ V₁} (hf : f ∈ F) : f ≤ sSupMaps F hF := by
  intro X Y hrel
  have hX : V₀.mem X := f.rel_dom hrel
  have hmem : (f.toElementMap (V₀.principal hX)).mem Y := (f.rel_iff_mem_principal hX).
    mp hrel
  exact ⟨hX, (V₁.le_sSup _ (mapsBounded_principal hF hX) ⟨f, hf, rfl⟩) Y hmem⟩

theorem sSupMaps_le {F : Set (ApproximableMap V₀ V₁)} (hF : PointwiseBounded F)
    {h : ApproximableMap V₀ V₁} (hh : ∀ f ∈ F, f ≤ h) : sSupMaps F hF ≤ h := by
  intro X Y hrel
  obtain ⟨hX, hYmem⟩ := hrel
  have hle : supOnPrincipal F hF X hX ≤ h.toElementMap (V₀.principal hX) :=
    V₁.sSup_le _ (mapsBounded_principal hF hX) fun s hs => by
      obtain ⟨f, hf, rfl⟩ := hs
      exact (le_iff_toElementMap_le.mp (hh f hf)) (V₀.principal hX)
  exact (h.rel_iff_mem_principal hX).mpr (hle Y hYmem)

theorem mapsBounded_iff_pointwiseBounded {F : Set (ApproximableMap V₀ V₁)} :
    MapsBounded F ↔ PointwiseBounded F := by
  constructor
  · intro ⟨h, hh⟩ x
    refine ⟨h.toElementMap x, fun z hz => ?_⟩
    obtain ⟨f, hf, rfl⟩ := hz
    exact (le_iff_toElementMap_le.mp (hh f hf)) x
  · intro hpb
    refine ⟨sSupMaps F hpb, fun f hf X Y hrel => ?_⟩
    have hX : V₀.mem X := f.rel_dom hrel
    have hmem : (f.toElementMap (V₀.principal hX)).mem Y := (f.rel_iff_mem_principal hX
    ).mp hrel
    exact ⟨hX, (V₁.le_sSup _ (mapsBounded_principal hpb hX) ⟨f, hf, rfl⟩) Y hmem⟩

theorem toElementMap_sSupMaps_principal {F : Set (ApproximableMap V₀ V₁)} (hF :
    PointwiseBounded F)
    {X : Set α} (hX : V₀.mem X) :
    (sSupMaps F hF).toElementMap (V₀.principal hX) = supOnPrincipal F hF X hX :=
  toElementMap_ofMono_principal _ (supOnPrincipal_mono F hF) X hX

theorem toElementMap_sSupMaps {F : Set (ApproximableMap V₀ V₁)} (hF : PointwiseBounded
    F)
    (x : V₀.Element) :
    (sSupMaps F hF).toElementMap x =
      V₁.sSup (Set.image (fun f => f.toElementMap x) F) (hF x) := by
  apply le_antisymm
  ·
```

```
    intro Y hY
    rw [toElementMap_mem_iff_principal (sSupMaps F hF) x] at hY
    obtain ⟨X, hxX, hY'⟩ := hY
    have hX : V₀.mem X := x.sub hxX
    rw [toElementMap_sSupMaps_principal hF] at hY'
    have hprinc : V₀.principal hX ≤ x := fun Z hZ => x.up_mem hxX hZ.1 hZ.2
    have hsub : supOnPrincipal F hF X hX ≤ V₁.sSup (Set.image (fun f => f.toElementMap
     x) F) (hF x) :=
      V₁.sSup_le _ (mapsBounded_principal hF hX) fun s hs => by
        obtain ⟨f, hf, rfl⟩ := hs
        exact (toElementMap_mono f hprinc).trans (V₁.le_sSup _ (hF x) ⟨f, hf, rfl⟩)
    exact hsub Y hY'
  .
    refine V₁.sSup_le _ (hF x) fun s hs => ?_
    obtain ⟨f, hf, rfl⟩ := hs
    exact le_iff_toElementMap_le.mp (le_sSupMaps hF hf) x

theorem toElementMap_sSupMaps' {F : Set (ApproximableMap V₀ V₁)} (hF : MapsBounded F) (
    x : V₀.Element) :
    (sSupMaps F (mapsBounded_iff_pointwiseBounded.mp hF)).toElementMap x =
      V₁.sSup (Set.image (fun f => f.toElementMap x) F)
        (mapsBounded_iff_pointwiseBounded.mp hF x) :=
  toElementMap_sSupMaps (mapsBounded_iff_pointwiseBounded.mp hF) x

theorem toFilter_le_iff {f g : ApproximableMap V₀ V₁} : toFilter f ≤ toFilter g ↔ f ≤
    g :=
  (funSpaceEquiv V₀ V₁).symm.map_rel_iff'

theorem mapsBounded_to_filters {F : Set (ApproximableMap V₀ V₁)} (h : MapsBounded F) :
    (funSpace V₀ V₁).Bounded (Set.image toFilter F) := by
  obtain ⟨h, hh⟩ := h
  refine ⟨toFilter h, fun φ hφ => ?_⟩
  obtain ⟨f, hf, rfl⟩ := hφ
  exact (toFilter_le_iff).mpr (hh f hf)

end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.15 Exercise 3.14 — tagged product of tokens

For the most part we can assume that there is at most a countable number of tokens; thus, without loss of generality the underlying sets Δ_i of given systems $\mathcal{D}_i$ could be assumed to be subsets of Σ^* where $\Sigma = \{0, 1\}$. (Any denumerable set would do.) Show that the product $\mathcal{D}_0 \times \mathcal{D}_1$ could be defined as the system over the set $0\Delta_0 \cup 1\Delta_1$ where

$$\mathcal{D}_0 \times \mathcal{D}_1 = \{0X \cup 1Y \mid X \in \mathcal{D}_0 \text{ and } Y \in \mathcal{D}_1\}.$$

In other words, the assumption of the disjointness of Δ_0 and Δ_1 is unnecessary. Give, therefore, the revised definition of $\langle x, y\rangle$ for elements, and prove that for a single system $\mathcal{D}$, there exists an approximable mapping

$$\mathrm{diag} : \mathcal{D} \to \mathcal{D} \times \mathcal{D}$$

where $\mathrm{diag}(x) = \langle x, x\rangle$ for all $x \in |\mathcal{D}|$. Also extend the definition to a product of n-factors

$$\mathcal{D}_0 \times \mathcal{D}_1 \times \cdots \times \mathcal{D}_{n-1}$$

which will be a system over the set

$$\bigcup_{i<n} 1^i 0 \Delta_i.$$

Note that for a 2-termed product we simplify $10\Delta_1$ to $1\Delta_1$.

Exercise_3_14.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_4
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Definition_3_3
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_2
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.bot
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
variable {α : Type*} (V : NeighborhoodSystem α)

def diag : ApproximableMap V (prod V V) := paired (idMap V) (idMap V)

end DomainTheory.NeighbourhoodSystems
end

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
variable {α : Type*} (V : NeighborhoodSystem α)

@[simp] theorem diag_rel {Z : Set α} {P : Set (α ? α)} :
    (diag V).rel Z P ↔
      (prod V V).mem P ∧ (idMap V).rel Z (Sum.inl ^-1' P) ∧ (idMap V).rel Z (Sum.inr
    ^-1' P) :=
  Iff.rfl

@[simp] theorem toElementMap_diag (x : V.Element) :
    (diag V).toElementMap x = pair x x := by
  rw [diag, toElementMap_paired, toElementMap_idMap]

theorem proj₀_comp_diag : (proj₀ V V).comp (diag V) = idMap V :=
  proj₀_comp_paired (idMap V) (idMap V)
end

section
set_option linter.unusedVariables false

theorem example_314.{u_1} : ∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α),
```

```
  @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α (Sum α α) α V
      (@DomainTheory.NeighbourhoodSystems.prod α α V V) V (@DomainTheory.
    NeighbourhoodSystems.proj₀ α α V V)
      (@DomainTheory.NeighbourhoodSystems.diag α V))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap α V) :=
  @DomainTheory.NeighbourhoodSystems.proj₀_comp_diag
end

section
open NeighborhoodSystem ApproximableMap
variable {α : Type*} (V : NeighborhoodSystem α)

theorem proj₁_comp_diag : (proj₁ V V).comp (diag V) = idMap V :=
  proj₁_comp_paired (idMap V) (idMap V)
end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.16 Exercise 3.15 — product isomorphisms

Establish the usual isomorphisms:

(i) $\mathcal{D}_0 \times \mathcal{D}_1 \cong \mathcal{D}_1 \times \mathcal{D}_0$;

(ii) $\mathcal{D}_0 \times (\mathcal{D}_1 \times \mathcal{D}_2) \cong (\mathcal{D}_0 \times \mathcal{D}_1) \times \mathcal{D}_2 \cong \mathcal{D}_0 \times \mathcal{D}_1 \times \mathcal{D}_2$.

How does the product of no factors fit in? Prove also:

(iii) $\mathcal{D}_0 \cong \mathcal{D}'_0$ and $\mathcal{D}_1 \cong \mathcal{D}'_1$ imply $\mathcal{D}_0 \times \mathcal{D}_1 \cong \mathcal{D}'_0 \times \mathcal{D}'_1$.

Exercise_3_15.lean

```
module
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_14

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.DomainIso
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem
variable {α β ? α' β' : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}
variable {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'}

def prodCommD (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    (prod V₀ V₁).Element ≃o (prod V₁ V₀).Element :=
  (prodEquiv V₀ V₁).trans (OrderIso.prodComm.trans (prodEquiv V₁ V₀).symm)
```

```
def prodCongrOrderIso {A B C D : Type*} [Preorder A] [Preorder B] [Preorder C] [
    Preorder D]
    (e₀ : A ≃o B) (e₁ : C ≃o D) : A × C ≃o B × D where
  toFun p := (e₀ p.1, e₁ p.2)
  invFun q := (e₀.symm q.1, e₁.symm q.2)
  left_inv p := by simp
  right_inv q := by simp
  map_rel_iff' := by
    rintro ⟨a, c⟩ ⟨a', c'⟩
    show (e₀ a, e₁ c) ≤ (e₀ a', e₁ c') ↔ (a, c) ≤ (a', c')
    rw [Prod.mk_le_mk, Prod.mk_le_mk, e₀.le_iff_le, e₁.le_iff_le]

def prodAssocD (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) (V₂ :
    NeighborhoodSystem ?) :
    (prod V₀ (prod V₁ V₂)).Element ≃o (prod (prod V₀ V₁) V₂).Element :=
  (prodEquiv V₀ (prod V₁ V₂)).trans <|
    (prodCongrOrderIso (OrderIso.refl V₀.Element) (prodEquiv V₁ V₂)).trans <|
      (OrderIso.prodAssoc V₀.Element V₁.Element V₂.Element).symm.trans <|
        (prodCongrOrderIso (prodEquiv V₀ V₁).symm (OrderIso.refl V₂.Element)).trans
          (prodEquiv (prod V₀ V₁) V₂).symm

def prodUniqueOrderIso (A C : Type*) [Preorder A] [Preorder C] [Unique C] : A × C ≃o A
    where
  toFun p := p.1
  invFun a := (a, default)
  left_inv p := by
    have : (default : C) = p.2 := Subsingleton.elim _ _
    simp [this]
  right_inv _ := rfl
  map_rel_iff' := by
    rintro ⟨a, c⟩ ⟨a', c'⟩
    simp only [Prod.mk_le_mk]
    exact ⟨fun h => ⟨h, le_of_eq (Subsingleton.elim c c')⟩, And.left⟩

def uniqueProdOrderIso (A C : Type*) [Preorder A] [Preorder C] [Unique C] : C × A ≃o A
    where
  toFun p := p.2
  invFun a := (default, a)
  left_inv p := by
    have : (default : C) = p.1 := Subsingleton.elim _ _
    simp [this]
  right_inv _ := rfl
  map_rel_iff' := by
    rintro ⟨c, a⟩ ⟨c', a'⟩
    simp only [Prod.mk_le_mk]
    exact ⟨fun h => ⟨le_of_eq (Subsingleton.elim c c'), h⟩, And.right⟩

def unitSys : NeighborhoodSystem Unit where
  mem X := X = Set.univ
  master := Set.univ
  master_nonempty := ⟨(), Set.mem_univ _⟩
  master_mem := rfl
  inter_mem := by rintro X Y Z rfl rfl _ _; simp
  sub_master := by rintro X rfl; exact subset_rfl

theorem unitSys_element_eq (x : unitSys.Element) : x = unitSys.bot := by
```

```
  apply Element.ext
  intro Y
  constructor
  · intro hY; rw [mem_bot]; exact x.sub hY
  · intro hY; rw [mem_bot] at hY; subst hY; exact x.master_mem

instance : Unique unitSys.Element where
  default := unitSys.bot
  uniq := unitSys_element_eq

def prodCongrD (e₀ : V₀.Element ≃o V₀'.Element) (e₁ : V₁.Element ≃o V₁'.Element) :
    (prod V₀ V₁).Element ≃o (prod V₀' V₁').Element :=
  (prodEquiv V₀ V₁).trans ((prodCongrOrderIso e₀ e₁).trans (prodEquiv V₀' V₁').symm)

def prodUnitD (V₀ : NeighborhoodSystem α) :
    (prod V₀ unitSys).Element ≃o V₀.Element :=
  (prodEquiv V₀ unitSys).trans (prodUniqueOrderIso _ _)

def unitProdD (V₀ : NeighborhoodSystem α) :
    (prod unitSys V₀).Element ≃o V₀.Element :=
  (prodEquiv unitSys V₀).trans (uniqueProdOrderIso _ _)

theorem Isomorphic.prod (h₀ : V₀ ≅? V₀') (h₁ : V₁ ≅? V₁') : prod V₀ V₁ ≅? prod V₀' V₁'
    :=
  h₀.elim fun e₀ => h₁.elim fun e₁ => ⟨prodCongrD e₀ e₁⟩

theorem prod_assoc_isomorphic : prod V₀ (prod V₁ V₂) ≅? prod (prod V₀ V₁) V₂ :=
  ⟨prodAssocD V₀ V₁ V₂⟩

theorem prod_comm_isomorphic : prod V₀ V₁ ≅? prod V₁ V₀ := ⟨prodCommD V₀ V₁⟩
end

section
set_option linter.unusedVariables false

theorem example_315.{u_1, u_2, u_4, u_5, u_3} : And
  (And
    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
      @DomainTheory.NeighbourhoodSystems.Isomorphic (Sum α β) (Sum β α)
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) (@DomainTheory.
    NeighbourhoodSystems.prod β α V₁ V₀))
    (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
      {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
      {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'},
      @DomainTheory.NeighbourhoodSystems.Isomorphic α α' V₀ V₀' →
        @DomainTheory.NeighbourhoodSystems.Isomorphic β β' V₁ V₁' →
          @DomainTheory.NeighbourhoodSystems.Isomorphic (Sum α β) (Sum α' β')
            (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁)
            (@DomainTheory.NeighbourhoodSystems.prod α' β' V₀' V₁')))
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
    NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
```

```
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?},
    @DomainTheory.NeighbourhoodSystems.Isomorphic (Sum α (Sum β ?)) (Sum (Sum α β) ?)
      (@DomainTheory.NeighbourhoodSystems.prod α (Sum β ?) V₀ (@DomainTheory.
    NeighbourhoodSystems.prod β ? V₁ V₂))
      (@DomainTheory.NeighbourhoodSystems.prod (Sum α β) ? (@DomainTheory.
    NeighbourhoodSystems.prod α β V₀ V₁) V₂)) :=
  @And.intro
  (And
    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
      @DomainTheory.NeighbourhoodSystems.Isomorphic (Sum α β) (Sum β α)
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) (@DomainTheory.
    NeighbourhoodSystems.prod β α V₁ V₀))
    (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
      {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
      {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'},
      @DomainTheory.NeighbourhoodSystems.Isomorphic α α' V₀ V₀' →
        @DomainTheory.NeighbourhoodSystems.Isomorphic β β' V₁ V₁' →
          @DomainTheory.NeighbourhoodSystems.Isomorphic (Sum α β) (Sum α' β')
            (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁)
            (@DomainTheory.NeighbourhoodSystems.prod α' β' V₀' V₁')))
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
    NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?},
    @DomainTheory.NeighbourhoodSystems.Isomorphic (Sum α (Sum β ?)) (Sum (Sum α β) ?)
      (@DomainTheory.NeighbourhoodSystems.prod α (Sum β ?) V₀ (@DomainTheory.
    NeighbourhoodSystems.prod β ? V₁ V₂))
      (@DomainTheory.NeighbourhoodSystems.prod (Sum α β) ? (@DomainTheory.
    NeighbourhoodSystems.prod α β V₀ V₁) V₂))
  (@And.intro
    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
      @DomainTheory.NeighbourhoodSystems.Isomorphic (Sum α β) (Sum β α)
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) (@DomainTheory.
    NeighbourhoodSystems.prod β α V₁ V₀))
    (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
      {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
      {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'},
      @DomainTheory.NeighbourhoodSystems.Isomorphic α α' V₀ V₀' →
        @DomainTheory.NeighbourhoodSystems.Isomorphic β β' V₁ V₁' →
          @DomainTheory.NeighbourhoodSystems.Isomorphic (Sum α β) (Sum α' β')
            (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) (@DomainTheory.
    NeighbourhoodSystems.prod α' β' V₀' V₁'))
    @DomainTheory.NeighbourhoodSystems.prod_comm_isomorphic @DomainTheory.
    NeighbourhoodSystems.Isomorphic.prod)
  @DomainTheory.NeighbourhoodSystems.prod_assoc_isomorphic
end

section
```

```
open NeighborhoodSystem
variable {α β ? α' β' : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}
variable {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'}

theorem prod_unit_isomorphic : prod V₀ unitSys ≅? V₀ := ⟨prodUnitD V₀⟩

theorem unit_prod_isomorphic : prod unitSys V₀ ≅? V₀ := ⟨unitProdD V₀⟩
end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.17 Exercise 3.16 — infinite sequences of elements

Let $\mathcal{D}$ be a given neighbourhood system over $\Delta \subseteq \Sigma^*$. Define

$$\Delta^\infty = \bigcup_{n=0}^{\infty} 1^n 0 \Delta,$$

so that Δ^∞ is split into infinitely many disjoint copies of Δ. Let $\mathcal{D}^\infty$ be the least family of subsets of Σ^* where

1. $\Delta^\infty \in \mathcal{D}^\infty$, and
2. whenever $X \in \mathcal{D}$ and $Y \in \mathcal{D}^\infty$, then $0X \cup 1Y \in \mathcal{D}^\infty$.

Show that $\mathcal{D}^\infty$ is a neighbourhood system over Δ^∞. Prove the isomorphism

$$\mathcal{D}^\infty \cong \mathcal{D} \times \mathcal{D}^\infty.$$

Show, moreover, that the elements of $|\mathcal{D}^\infty|$ are in a one-one correspondence with arbitrary infinite sequences $\langle x_n \rangle_{n=0}^{\infty}$ of elements $x_n \in |\mathcal{D}|$ by using combinations of neighbourhoods

$$0X_0 \cup 10X_1 \cup \cdots \cup 1^n 0X_n \cup \cdots,$$

where from some point on all the X_m are equal to Δ.

Exercise_3_16.lean

```
module
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_15

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_5
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem
variable {α : Type*}
```

```
def fiber (W : Set (ℕ × α)) (i : ℕ) : Set α := {a | (i, a) ∈ W}

@[simp] theorem mem_fiber {W : Set (ℕ × α)} {i : ℕ} {a : α} : a ∈ fiber W i ↔ (i, a)
    ∈ W := Iff.rfl

theorem eq_of_fiber_eq {W W' : Set (ℕ × α)} (h : ∀ i, fiber W i = fiber W' i) : W = W'
     := by
  ext ⟨i, a⟩
  exact Set.ext_iff.mp (h i) a

theorem fiber_inter (W W' : Set (ℕ × α)) (i : ℕ) :
    fiber (W ∩ W') i = fiber W i ∩ fiber W' i := rfl

theorem fiber_mono {W W' : Set (ℕ × α)} (h : W ⊆ W') (i : ℕ) : fiber W i ⊆ fiber W' i
     :=
  fun _ ha => h ha
end

section
open NeighborhoodSystem
variable {α : Type*}
variable (V : NeighborhoodSystem α)

def single (n : ℕ) (X : Set α) : Set (ℕ × α) :=
  {p | if p.1 = n then p.2 ∈ X else p.2 ∈ V.master}
end

section
open NeighborhoodSystem
variable {α : Type*}
variable (V : NeighborhoodSystem α)
variable {V}

@[simp] theorem fiber_single_self (n : ℕ) (X : Set α) : fiber (single V n X) n = X :=
    by
  ext a; simp [fiber, single]

theorem fiber_single_ne {n i : ℕ} (h : i = n) (X : Set α) : fiber (single V n X) i = V
    .master := by
  ext a; simp [fiber, single, h]

end

section
open NeighborhoodSystem
variable {α : Type*}
variable (V : NeighborhoodSystem α)
variable {V}

def iterSys (V : NeighborhoodSystem α) : NeighborhoodSystem (ℕ × α) where
  mem W := (∀ i, V.mem (fiber W i)) ∧ ∃ N, ∀ i, N ≤ i → fiber W i = V.master
  master := {p | p.2 ∈ V.master}
  master_nonempty := by
    obtain ⟨a, ha⟩ := V.master_nonempty
    exact ⟨(0, a), ha⟩
  master_mem := ⟨fun _ => V.master_mem, 0, fun _ _ => rfl⟩
```

```
  inter_mem := by
    rintro W W' Z ⟨hWf, NW, hNW⟩ ⟨hW'f, NW', hNW'⟩ ⟨hZf, _⟩ hsub
    refine ⟨fun i => ?_, max NW NW', fun i hi => ?_⟩
    · rw [fiber_inter]
      exact V.inter_mem (hWf i) (hW'f i) (hZf i) (fiber_mono hsub i)
    · rw [fiber_inter, hNW i (le_trans (le_max_left _ _) hi),
        hNW' i (le_trans (le_max_right _ _) hi), Set.inter_self]
  sub_master := by
    rintro W ⟨hWf, _⟩ ⟨i, a⟩ ha
    exact V.sub_master (hWf i) ha

@[simp] theorem iterSys_master : (iterSys V).master = {p : ℕ × α | p.2 ∈ V.master} :=
    rfl

theorem fiber_iterSys_master (i : ℕ) : fiber ((iterSys V).master) i = V.master := rfl

@[simp] theorem mem_iterSys {W : Set (ℕ × α)} :
    (iterSys V).mem W ↔ (∀ i, V.mem (fiber W i)) ∧ ∃ N, ∀ i, N ≤ i → fiber W i = V.
    master := Iff.rfl

theorem interUpTo_subset_master (F : ℕ → Set (ℕ × α)) (N : ℕ) :
    (iterSys V).interUpTo F N ⊆ (iterSys V).master := by
  induction N with
  | zero => exact subset_rfl
  | succ n ih => rw [NeighborhoodSystem.interUpTo_succ]; exact Set.inter_subset_left.
    trans ih

theorem reconstruct_subset {W : Set (ℕ × α)} (_hW : (iterSys V).mem W) {N : ℕ}
    (hN : ∀ i, N ≤ i → fiber W i = V.master) :
    (iterSys V).interUpTo (fun i => single V i (fiber W i)) N ⊆ W := by
  rintro ⟨j, a⟩ ha
  by_cases h : j < N
  · have hsub := (iterSys V).interUpTo_subset (fun i => single V i (fiber W i)) h
    have hmem : (j, a) ∈ single V j (fiber W j) := hsub ha
    simpa [single] using hmem
  · have haM : a ∈ V.master := interUpTo_subset_master (fun i => single V i (fiber W i)
    ) N ha
    have : a ∈ fiber W j := by rw [hN j (not_lt.mp h)]; exact haM
    exact this

theorem single_inter {n : ℕ} (X X' : Set α) :
    single V n X ∩ single V n X' = single V n (X ∩ X') := by
  apply eq_of_fiber_eq
  intro i
  by_cases h : i = n
  · subst h; rw [fiber_inter, fiber_single_self, fiber_single_self, fiber_single_self]
  · rw [fiber_inter, fiber_single_ne h, fiber_single_ne h, fiber_single_ne h, Set.
    inter_self]

theorem single_master (n : ℕ) : single V n V.master = (iterSys V).master := by
  apply eq_of_fiber_eq
  intro i
  rw [fiber_iterSys_master]
  by_cases h : i = n
  · subst h; rw [fiber_single_self]
  · rw [fiber_single_ne h]
```

```
theorem single_mem {n : ℕ} {X : Set α} (hX : V.mem X) : (iterSys V).mem (single V n X)
    := by
  refine ⟨fun i => ?_, n + 1, fun i hi => ?_⟩
  · by_cases h : i = n
    · subst h; rw [fiber_single_self]; exact hX
    · rw [fiber_single_ne h]; exact V.master_mem
  · exact fiber_single_ne (by omega : i = n) X

theorem single_mono {n : ℕ} {X X' : Set α} (h : X ⊆ X') : single V n X ⊆ single V n X'
    := by
  intro p hp
  simp only [single, Set.mem_ofPred_eq] at hp ⊢
  by_cases hc : p.1 = n
  · rw [ite_eq_left hc] at hp ⊢; exact h hp
  · rw [ite_eq_right hc] at hp ⊢; exact hp

def component (z : (iterSys V).Element) (n : ℕ) : V.Element where
  mem X := V.mem X ∧ z.mem (single V n X)
  sub h := h.1
  master_mem := ⟨V.master_mem, by rw [single_master]; exact z.master_mem⟩
  inter_mem := by
    rintro X X' ⟨_, hzX⟩ ⟨_, hzX'⟩
    have hz : z.mem (single V n (X ∩ X')) := by rw [← single_inter]; exact z.inter_mem
     hzX hzX'
    have hmem : V.mem (X ∩ X') := by
      have := (z.sub hz).1 n; rwa [fiber_single_self] at this
    exact ⟨hmem, hz⟩
  up_mem := by
    rintro X X' ⟨_, hzX⟩ hX' hXX'
    exact ⟨hX', z.up_mem hzX (single_mem hX') (single_mono hXX')⟩

@[simp] theorem mem_component {z : (iterSys V).Element} {n : ℕ} {X : Set α} :
    (component z n).mem X ↔ V.mem X ∧ z.mem (single V n X) := Iff.rfl

def ofSeq (seq : ℕ → V.Element) : (iterSys V).Element where
  mem W := (iterSys V).mem W ∧ ∀ i, (seq i).mem (fiber W i)
  sub h := h.1
  master_mem := ⟨(iterSys V).master_mem, fun i => by
    rw [fiber_iterSys_master]; exact (seq i).master_mem⟩
  inter_mem := by
    rintro W W' ⟨hW, hWf⟩ ⟨hW', hW'f⟩
    refine ⟨⟨fun i => ?_, ?_⟩, fun i => ?_⟩
    · rw [fiber_inter]; exact (seq i).sub ((seq i).inter_mem (hWf i) (hW'f i))
    · obtain ⟨NW, hNW⟩ := hW.2
      obtain ⟨NW', hNW'⟩ := hW'.2
      refine ⟨max NW NW', fun i hi => ?_⟩
      rw [fiber_inter, hNW i (le_trans (le_max_left _ _) hi),
        hNW' i (le_trans (le_max_right _ _) hi), Set.inter_self]
    · rw [fiber_inter]; exact (seq i).inter_mem (hWf i) (hW'f i)
  up_mem := by
    rintro W W' ⟨_, hWf⟩ hW' hWW'
    exact ⟨hW', fun i => (seq i).up_mem (hWf i) (hW'.1 i) (fiber_mono hWW' i)⟩

@[simp] theorem mem_ofSeq {seq : ℕ → V.Element} {W : Set (ℕ × α)} :
    (ofSeq seq).mem W ↔ (iterSys V).mem W ∧ ∀ i, (seq i).mem (fiber W i) := Iff.rfl
```

```
@[simp] theorem component_ofSeq (seq : ℕ → V.Element) (n : ℕ) :
    component (ofSeq seq) n = seq n := by
  apply Element.ext
  intro X
  constructor
  · rintro ⟨_, _, hfib⟩
    have := hfib n; rwa [fiber_single_self] at this
  · intro hX
    refine ⟨(seq n).sub hX, single_mem ((seq n).sub hX), fun i => ?_⟩
    by_cases h : i = n
    · subst h; rw [fiber_single_self]; exact hX
    · rw [fiber_single_ne h]; exact (seq i).master_mem

theorem ofSeq_mono {seq seq' : ℕ → V.Element} (h : ∀ n, seq n ≤ seq' n) :
    ofSeq seq ≤ ofSeq seq' := by
  rintro W ⟨hW, hf⟩
  exact ⟨hW, fun i => h i _ (hf i)⟩

theorem subset_single {W : Set (ℕ × α)} (hW : (iterSys V).mem W) (i : ℕ) :
    W ⊆ single V i (fiber W i) := by
  rintro ⟨j, a⟩ ha
  simp only [single, Set.mem_ofPred_eq]
  by_cases h : j = i
  · rw [ite_eq_left h]; subst h; exact ha
  · rw [ite_eq_right h]; exact V.sub_master (hW.1 j) ha

@[simp] theorem ofSeq_component (z : (iterSys V).Element) :
    ofSeq (fun n => component z n) = z := by
  apply Element.ext
  intro W
  constructor
  · rintro ⟨hW, hfib⟩
    obtain ⟨N, hN⟩ := hW.2
    exact z.up_mem (z.mem_interUpTo _ (n := N) (fun i _ => (hfib i).2)) hW
      (reconstruct_subset hW hN)
  · intro hzW
    refine ⟨z.sub hzW, fun i => ?_⟩
    exact ⟨(z.sub hzW).1 i, z.up_mem hzW (single_mem ((z.sub hzW).1 i)) (subset_single
    (z.sub hzW) i)⟩

theorem le_of_component_le {z z' : (iterSys V).Element}
    (h : ∀ n, component z n ≤ component z' n) : z ≤ z' := by
  have hmono := ofSeq_mono h
  rwa [ofSeq_component, ofSeq_component] at hmono

def iterSeqEquiv (V : NeighborhoodSystem α) : (iterSys V).Element ≃o (∀ _ : ℕ, V.
    Element) where
  toFun z := fun n => component z n
  invFun seq := ofSeq seq
  left_inv z := ofSeq_component z
  right_inv seq := by funext n; exact component_ofSeq seq n
  map_rel_iff' := by
    intro z z'
    constructor
    · intro h
```

```
      exact le_of_component_le (fun n => h n)
    · intro h n X hX
      exact ⟨hX.1, h (single V n X) hX.2⟩

def natShiftEquiv (E : Type*) [Preorder E] : (ℕ → E) ≃o E × (ℕ → E) where
  toFun f := (f 0, fun n => f (n + 1))
  invFun p := fun n => Nat.casesOn n p.1 (fun m => p.2 m)
  left_inv f := by funext n; cases n <;> rfl
  right_inv p := rfl
  map_rel_iff' := by
    intro f g
    constructor
    · rintro ⟨h0, hs⟩
      intro n
      cases n with
      | zero => exact h0
      | succ m => exact hs m
    · intro h
      exact ⟨h 0, fun m => h (m + 1)⟩

def iterProdIso (V : NeighborhoodSystem α) :
    (iterSys V).Element ≃o (prod V (iterSys V)).Element :=
  (iterSeqEquiv V).trans <|
    (natShiftEquiv V.Element).trans <|
      (prodCongrOrderIso (OrderIso.refl V.Element) (iterSeqEquiv V).symm).trans
        (prodEquiv V (iterSys V)).symm
end

section
open NeighborhoodSystem
variable {α : Type*}
variable (V : NeighborhoodSystem α)
variable {V}
open ApproximableMap

def projN (V : NeighborhoodSystem α) (n : ℕ) : ApproximableMap (iterSys V) V where
  rel W X := (iterSys V).mem W ∧ V.mem X ∧ fiber W n ⊆ X
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(iterSys V).master_mem, V.master_mem, by rw [fiber_iterSys_master]⟩
  inter_right := by
    rintro W X X' ⟨hW, hX, hsub⟩ ⟨_, hX', hsub'⟩
    exact ⟨hW, V.inter_mem hX hX' (hW.1 n) (Set.subset_inter hsub hsub'),
      Set.subset_inter hsub hsub'⟩
  mono := by
    rintro W W₂ X X₂ ⟨_, _, hsub⟩ hW₂W hXX₂ hW₂ hX₂
    exact ⟨hW₂, hX₂, (fiber_mono hW₂W n).trans (hsub.trans hXX₂)⟩
end

section
open NeighborhoodSystem
variable {α : Type*}

theorem subset_of_fiber_subset {W W' : Set (ℕ × α)} (h : ∀ i, fiber W i ⊆ fiber W' i)
    :
    W ⊆ W' := fun ⟨i, _⟩ ha => h i ha
```

```
variable (V : NeighborhoodSystem α)

variable {V}

open ApproximableMap

@[simp] theorem projN_rel {n : ℕ} {W : Set (ℕ × α)} {X : Set α} :
    (projN V n).rel W X ↔ (iterSys V).mem W ∧ V.mem X ∧ fiber W n ⊆ X := Iff.rfl

@[simp] theorem toElementMap_projN (z : (iterSys V).Element) (n : ℕ) :
    (projN V n).toElementMap z = component z n := by
  apply Element.ext
  intro X
  constructor
  · rintro ⟨W, hzW, hW, hX, hsub⟩
    refine ⟨hX, z.up_mem hzW (single_mem hX) ?_⟩
    refine subset_of_fiber_subset (fun i => ?_)
    by_cases h : i = n
    · subst h; rw [fiber_single_self]; exact hsub
    · rw [fiber_single_ne h]; exact V.sub_master (hW.1 i)
  · rintro ⟨hX, hz⟩
    exact ⟨single V n X, hz, single_mem hX, hX, by rw [fiber_single_self]⟩
end

section
open NeighborhoodSystem
variable {α : Type*}
variable (V : NeighborhoodSystem α)
variable {V}

theorem iter_isomorphic (V : NeighborhoodSystem α) : iterSys V ≅? prod V (iterSys V)
    :=
  ⟨iterProdIso V⟩
end

section
set_option linter.unusedVariables false

theorem example_316.{u_1} : ∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α),
  @DomainTheory.NeighbourhoodSystems.Isomorphic (Prod Nat α) (Sum α (Prod Nat α))
    (@DomainTheory.NeighbourhoodSystems.iterSys α V)
    (@DomainTheory.NeighbourhoodSystems.prod α (Prod Nat α) V (@DomainTheory.
    NeighbourhoodSystems.iterSys α V)) :=
  @DomainTheory.NeighbourhoodSystems.iter_isomorphic
end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.18 Exercise 3.17 — embedding binary sequences

Using the $\mathcal{B}$ and $\mathcal{T}$ of Example 2.3 show there is a one-one approximable mapping

$$\{f : \mathcal{B} \to \mathcal{T}^\infty\}$$

and another approximable mapping

$$\{g : \mathcal{T}^\infty \to \mathcal{B}\}$$

such that

$$g \circ f = I_{\mathcal{B}} \quad \text{and} \quad f \circ g \subseteq I_{\mathcal{T}^\infty}.$$

Are $\mathcal{B}$ and $\mathcal{T}^\infty$ isomorphic? Are $\mathcal{B}$ and $\mathcal{T} \times \mathcal{B}$ isomorphic?

Exercise_3_17.lean

```
module
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_16
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Definition_3_8
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Examples_1_2_1_5_revisited
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems.Exercise317
section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ExampleB ApproximableMap

abbrev T : NeighborhoodSystem Example12.Token := Example12.neighborhoodSystem

abbrev Token := Example12.Token

theorem T_nbhd_nonempty {F : Set Token} (hF : T.mem F) : F.Nonempty := by
  rcases (Example12.mem_iff F).mp hF with rfl | rfl | rfl
  · exact ⟨0, by simp [Example12.master]⟩
  · exact ⟨0, by simp [Example12.zero]⟩
  · exact ⟨1, by simp [Example12.one]⟩

def bitNbhd : Bool → Set Token
  | false => Example12.zero
  | true => Example12.one

theorem bitNbhd_mem (b : Bool) : T.mem (bitNbhd b) := by
  cases b
  · exact Example12.mem_zero
  · exact Example12.mem_one

def encSet (σ : Str) : Set (ℕ × Token) := {p | ∀ b, σ[p.1]? = some b → p.2 ∈ bitNbhd
    b}

@[simp] theorem mem_encSet {σ : Str} {p : ℕ × Token} :
    p ∈ encSet σ ↔ ∀ b, σ[p.1]? = some b → p.2 ∈ bitNbhd b := Iff.rfl

@[simp] theorem encSet_nil : encSet [] = Set.univ := by
  ext p; simp [encSet]
```

```
theorem comparable_of_agree : ∀ {τ τ' : Str},
    (∀ (i : ℕ) (b b' : Bool), τ[i]? = some b → τ'[i]? = some b' → b = b') → τ <+: τ'
    ∨ τ' <+: τ
  | [], _, _ => Or.inl (List.nil_prefix)
  | _ :: _, [], _ => Or.inr (List.nil_prefix)
  | a :: s, a' :: s', hag => by
      have ha : a = a' := hag 0 a a' (by simp) (by simp)
      subst ha
      have hrec : ∀ (i : ℕ) (b b' : Bool), s[i]? = some b → s'[i]? = some b' → b = b'
     := by
        intro i b b' hb hb'
        exact hag (i + 1) b b' (by simpa using hb) (by simpa using hb')
      rcases comparable_of_agree hrec with h | h
      · exact Or.inl (List.cons_prefix_cons.mpr ⟨rfl, h⟩)
      · exact Or.inr (List.cons_prefix_cons.mpr ⟨rfl, h⟩)

theorem encSet_agree {τ τ' : Str} {W : Set (ℕ × Token)} (hW : (iterSys T).mem W)
    (h : W ⊆ encSet τ) (h' : W ⊆ encSet τ') {i : ℕ} {b b' : Bool}
    (hb : τ[i]? = some b) (hb' : τ'[i]? = some b') : b = b' := by
  obtain ⟨t, ht⟩ := T_nbhd_nonempty (hW.1 i)
  have h1 : t ∈ bitNbhd b := (h ht) b hb
  have h2 : t ∈ bitNbhd b' := (h' ht) b' hb'
  by_contra hne
  cases b <;> cases b' <;> simp_all [bitNbhd, Example12.zero, Example12.one]

theorem encSet_anti {σ σ' : Str} (h : σ <+: σ') : encSet σ' ⊆ encSet σ := by
  obtain ⟨t, rfl⟩ := h
  rintro ⟨i, x⟩ hp b hb
  have hi : i < σ.length := by
    obtain ⟨hlt, -⟩ := List.getElem?_eq_some_iff.mp hb; exact hlt
  exact hp b (by rw [List.getElem?_append_left hi]; exact hb)

theorem fiber_encSet_none {σ : Str} {i : ℕ} (h : σ[i]? = none) :
    fiber (encSet σ) i = Set.univ := by
  ext t
  simp only [mem_fiber, mem_encSet, Set.mem_univ, iff_true]
  intro b hb; rw [h] at hb; exact absurd hb (by simp)

theorem fiber_encSet_some {σ : Str} {i : ℕ} {b : Bool} (h : σ[i]? = some b) :
    fiber (encSet σ) i = bitNbhd b := by
  ext t
  simp only [mem_fiber, mem_encSet]
  constructor
  · intro hh; exact hh b h
  · intro ht b' hb'
    rw [h] at hb'
    obtain rfl := Option.some.inj hb'
    exact ht

theorem encSet_mem (σ : Str) : (iterSys T).mem (encSet σ) := by
  refine ⟨fun i => ?_, σ.length, fun i hi => ?_⟩
  · cases h : σ[i]? with
    | none => rw [fiber_encSet_none h]; exact T.master_mem
    | some b => rw [fiber_encSet_some h]; exact bitNbhd_mem b
  · rw [fiber_encSet_none (List.getElem?_eq_none_iff.mpr hi)]; rfl
```

```
def f : ApproximableMap B (iterSys T) where
  rel X W := ∃ σ, X = cone σ ∧ (iterSys T).mem W ∧ encSet σ ⊆ W
  rel_dom := fun ⟨σ, hX, _⟩ => hX ▶ memB_cone σ
  rel_cod := fun ⟨_, _, hW, _⟩ => hW
  master_rel := ⟨[], cone_nil.symm, (iterSys T).master_mem, by rw [encSet_nil]; exact
    Set.subset_univ _⟩
  inter_right := by
    rintro X W W' ⟨σ, hX, hWmem, hWsub⟩ ⟨σ', hX', hW'mem, hW'sub⟩
    obtain rfl : σ = σ' := cone_injective (hX.symm.trans hX')
    exact ⟨σ, hX, (iterSys T).inter_mem hWmem hW'mem (encSet_mem σ)
      (Set.subset_inter hWsub hW'sub), Set.subset_inter hWsub hW'sub⟩
  mono := by
    rintro X X' W W' ⟨σ, hX, _, hWsub⟩ hX'X hWW' hX' hW'mem
    obtain ⟨σ', rfl⟩ := hX'
    subst hX
    have hpre : σ <+: σ' := cone_subset_cone.mp hX'X
    exact ⟨σ', rfl, hW'mem, (encSet_anti hpre).trans (hWsub.trans hWW')⟩

def g : ApproximableMap (iterSys T) B where
  rel W X := (iterSys T).mem W ∧ ∃ τ, X = cone τ ∧ W ⊆ encSet τ
  rel_dom h := h.1
  rel_cod := fun ⟨_, τ, hX, _⟩ => hX ▶ memB_cone τ
  master_rel := ⟨(iterSys T).master_mem, [], cone_nil.symm, by rw [encSet_nil]; exact
    Set.subset_univ _⟩
  inter_right := by
    rintro W X X' ⟨hW, τ, hX, hWτ⟩ ⟨_, τ', hX', hWτ'⟩
    subst hX; subst hX'
    rcases comparable_of_agree (fun i b b' => encSet_agree hW hWτ hWτ') with hpre |
    hpre
    · exact ⟨hW, τ', by rw [Set.inter_eq_right.mpr (cone_subset_cone.mpr hpre)], hWτ'⟩
    · exact ⟨hW, τ, by rw [Set.inter_eq_left.mpr (cone_subset_cone.mpr hpre)], hWτ⟩
  mono := by
    rintro W W₂ X X₂ ⟨_, τ, hX, hWτ⟩ hW₂W hXX₂ hW₂ hX₂
    obtain ⟨τ₂, rfl⟩ := hX₂
    subst hX
    have hpre : τ₂ <+: τ := cone_subset_cone.mp hXX₂
    exact ⟨hW₂, τ₂, rfl, hW₂W.trans (hWτ.trans (encSet_anti hpre))⟩

theorem exists_not_mem_bitNbhd (b : Bool) : ∃ t : Token, t ∈ bitNbhd b := by
  cases b
  · exact ⟨1, by simp [bitNbhd, Example12.zero]⟩
  · exact ⟨0, by simp [bitNbhd, Example12.one]⟩

theorem fg_le_id : f.comp g ≤ idMap (iterSys T) := by
  intro W Z
  rw [comp_rel, idMap_rel]
  rintro ⟨X, ⟨hW, τ, hX, hWτ⟩, σ, hXσ, hZmem, hσZ⟩
  obtain rfl : τ = σ := cone_injective (hX.symm.trans hXσ)
  exact ⟨hW, hZmem, hWτ.trans hσZ⟩

theorem prefix_of_encSet_subset {σ τ : Str} (h : encSet σ ⊆ encSet τ) : τ <+: σ := by
  have hag : ∀ (i : ℕ) (b b' : Bool), σ[i]? = some b → τ[i]? = some b' → b = b' :=
    fun i b b' => encSet_agree (encSet_mem σ) subset_rfl h
  rcases comparable_of_agree hag with hστ | hτσ
  · by_cases hlen : σ.length = τ.length
```

```
    · exact (hστ.eq_of_length hlen) ▶ List.prefix_rfl
    · exfalso
      have hlt : σ.length < τ.length := lt_of_le_of_ne hστ.length_le hlen
      have hb' : τ[σ.length]? = some τ[σ.length] := List.getElem?_eq_getElem hlt
      obtain ⟨t, ht⟩ := exists_not_mem_bitNbhd τ[σ.length]
      have hmemσ : (σ.length, t) ∈ encSet σ := by
        intro b hb
        rw [List.getElem?_eq_none_iff.mpr (le_refl _)] at hb
        exact absurd hb (by simp)
      exact ht ((h hmemσ) _ hb')
  · exact hτσ

theorem gf_eq_id : g.comp f = idMap B := by
  apply ApproximableMap.ext
  intro X Y
  rw [comp_rel, idMap_rel]
  constructor
  · rintro ⟨W, ⟨σ, hX, _, hσW⟩, _, τ, hY, hWτ⟩
    refine ⟨hX ▶ memB_cone σ, hY ▶ memB_cone τ, ?_⟩
    have hsub : encSet σ ⊆ encSet τ := hσW.trans hWτ
    rw [hX, hY]
    exact cone_subset_cone.mpr (prefix_of_encSet_subset hsub)
  · rintro ⟨hX, hY, hXY⟩
    obtain ⟨σ, rfl⟩ := hX
    obtain ⟨τ, rfl⟩ := hY
    have hpre : τ <+: σ := cone_subset_cone.mp hXY
    exact ⟨encSet σ, ⟨σ, rfl, encSet_mem σ, subset_rfl⟩,
      encSet_mem σ, τ, rfl, encSet_anti hpre⟩

section
set_option linter.unusedVariables false

theorem example_317 : And
  (@LE.le
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Prod Nat DomainTheory.
    NeighbourhoodSystems.Example12.Token)
      (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token)
      (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
    Example12.Token
        DomainTheory.NeighbourhoodSystems.Exercise317.T)
      (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
    Example12.Token
        DomainTheory.NeighbourhoodSystems.Exercise317.T))
    (@Preorder.toLE
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Prod Nat DomainTheory.
    NeighbourhoodSystems.Example12.Token)
        (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token)
        (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
    Example12.Token
          DomainTheory.NeighbourhoodSystems.Exercise317.T)
        (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
    Example12.Token
          DomainTheory.NeighbourhoodSystems.Exercise317.T))
      (@PartialOrder.toPreorder
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Prod Nat DomainTheory.
    NeighbourhoodSystems.Example12.Token)
```

```
        (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token)
        (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.
  NeighbourhoodSystems.Example12.Token
          DomainTheory.NeighbourhoodSystems.Exercise317.T)
        (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.
  NeighbourhoodSystems.Example12.Token
          DomainTheory.NeighbourhoodSystems.Exercise317.T))
      (@DomainTheory.NeighbourhoodSystems.instPartialOrderApproximableMap
        (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token)
        (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token)
        (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.
  NeighbourhoodSystems.Example12.Token
          DomainTheory.NeighbourhoodSystems.Exercise317.T)
        (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.
  NeighbourhoodSystems.Example12.Token
          DomainTheory.NeighbourhoodSystems.Exercise317.T))))
   (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp
     (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token) DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
     (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token)
     (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
  Example12.Token
       DomainTheory.NeighbourhoodSystems.Exercise317.T)
     DomainTheory.NeighbourhoodSystems.ExampleB.B
     (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
  Example12.Token
       DomainTheory.NeighbourhoodSystems.Exercise317.T)
     DomainTheory.NeighbourhoodSystems.Exercise317.f DomainTheory.
  NeighbourhoodSystems.Exercise317.g)
   (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap
     (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token)
     (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
  Example12.Token
       DomainTheory.NeighbourhoodSystems.Exercise317.T)))
(@Eq
   (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
     DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.NeighbourhoodSystems
  .ExampleB.B
     DomainTheory.NeighbourhoodSystems.ExampleB.B)
   (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
     (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token) DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
     DomainTheory.NeighbourhoodSystems.ExampleB.B
     (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
  Example12.Token
       DomainTheory.NeighbourhoodSystems.Exercise317.T)
     DomainTheory.NeighbourhoodSystems.ExampleB.B DomainTheory.NeighbourhoodSystems.
  Exercise317.g
     DomainTheory.NeighbourhoodSystems.Exercise317.f)
   (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
     DomainTheory.NeighbourhoodSystems.ExampleB.B)) :=
@And.intro
(@LE.le
```

```
(@DomainTheory.NeighbourhoodSystems.ApproximableMap (Prod Nat DomainTheory.
NeighbourhoodSystems.Example12.Token)
   (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token)
   (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
Example12.Token
     DomainTheory.NeighbourhoodSystems.Exercise317.T)
   (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
Example12.Token
     DomainTheory.NeighbourhoodSystems.Exercise317.T))
 (@Preorder.toLE
   (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Prod Nat DomainTheory.
NeighbourhoodSystems.Example12.Token)
     (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token)
     (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
Example12.Token
       DomainTheory.NeighbourhoodSystems.Exercise317.T)
     (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
Example12.Token
       DomainTheory.NeighbourhoodSystems.Exercise317.T))
   (@PartialOrder.toPreorder
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Prod Nat DomainTheory.
NeighbourhoodSystems.Example12.Token)
       (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token)
       (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.
NeighbourhoodSystems.Example12.Token
         DomainTheory.NeighbourhoodSystems.Exercise317.T)
       (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.
NeighbourhoodSystems.Example12.Token
         DomainTheory.NeighbourhoodSystems.Exercise317.T))
     (@DomainTheory.NeighbourhoodSystems.instPartialOrderApproximableMap
       (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token)
       (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token)
       (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.
NeighbourhoodSystems.Example12.Token
         DomainTheory.NeighbourhoodSystems.Exercise317.T)
       (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.
NeighbourhoodSystems.Example12.Token
         DomainTheory.NeighbourhoodSystems.Exercise317.T))))
 (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp
   (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token) DomainTheory.
NeighbourhoodSystems.ExampleB.Str
   (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token)
   (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
Example12.Token
     DomainTheory.NeighbourhoodSystems.Exercise317.T)
   DomainTheory.NeighbourhoodSystems.ExampleB.B
   (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
Example12.Token
     DomainTheory.NeighbourhoodSystems.Exercise317.T)
   DomainTheory.NeighbourhoodSystems.Exercise317.f DomainTheory.
NeighbourhoodSystems.Exercise317.g)
 (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap
   (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token)
   (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
Example12.Token
     DomainTheory.NeighbourhoodSystems.Exercise317.T)))
```

```
  (@Eq
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
      DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.NeighbourhoodSystems
    .ExampleB.B
      DomainTheory.NeighbourhoodSystems.ExampleB.B)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
      (Prod Nat DomainTheory.NeighbourhoodSystems.Example12.Token) DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
      DomainTheory.NeighbourhoodSystems.ExampleB.B
      (@DomainTheory.NeighbourhoodSystems.iterSys DomainTheory.NeighbourhoodSystems.
    Example12.Token
        DomainTheory.NeighbourhoodSystems.Exercise317.T)
      DomainTheory.NeighbourhoodSystems.ExampleB.B DomainTheory.NeighbourhoodSystems.
    Exercise317.g
      DomainTheory.NeighbourhoodSystems.Exercise317.f)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
      DomainTheory.NeighbourhoodSystems.ExampleB.B))
  DomainTheory.NeighbourhoodSystems.Exercise317.fg_le_id DomainTheory.
    NeighbourhoodSystems.Exercise317.gf_eq_id
end

theorem f_injective : Function.Injective f.toElementMap := by
  intro x y hxy
  have : (g.comp f).toElementMap x = (g.comp f).toElementMap y := by
    rw [toElementMap_comp, toElementMap_comp, hxy]
  rwa [gf_eq_id, toElementMap_idMap, toElementMap_idMap] at this
end

end DomainTheory.NeighbourhoodSystems.Exercise317
end
```

3.4.19 Exercise 3.18 — separated sum

Let $\mathcal{D}_0$ and $\mathcal{D}_1$ be neighbourhood systems over Δ_0 and Δ_1, where we again assume that these are subsets of Σ^*. We assume that in addition *no neighbourhood is empty*. Why is this possible without loss of generality?

Define the *sum system* by:

$$\mathcal{D}_0 + \mathcal{D}_1 = \{\{\Lambda\} \cup 0\Delta_0 \cup 1\Delta_1\} \cup \{0X \mid X \in \mathcal{D}_0\} \cup \{1Y \mid Y \in \mathcal{D}_1\}.$$

Prove that this is a neighbourhood system over $\{\Lambda\} \cup 0\Delta_0 \cup 1\Delta_1$. (Throwing in $\{\Lambda\}$ was not all that necessary, but note that $\mathcal{B} = \mathcal{B} + \mathcal{B}$, and this is an equality of sets not just an isomorphism of systems.)

Prove that in general there are mappings

$$in_i : \mathcal{D}_i \to \mathcal{D}_0 + \mathcal{D}_1 \quad \text{and} \quad out_i : \mathcal{D}_0 + \mathcal{D}_1 \to \mathcal{D}_i,$$

where $out_i \circ in_i = I_{\mathcal{D}_i}$. Where does the assumption $\emptyset \notin \mathcal{D}_i$ come in? How can these sums be generalized to n-terms? (Hint: As for products use sets $1^i 0\Delta_i$.) Draw some pictures.

Exercise_3_18.lean

```
module
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Theorem_2_5

public import Mathlib.Data.Set.Operations
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
variable {α β : Type*}

def il (a : α) : Option (α ? β) := some (Sum.inl a)

def inj₀ (X : Set α) : Set (Option (α ? β)) := il '' X

@[simp] theorem il_mem_inj₀ {X : Set α} {a : α} : (il a : Option (α ? β)) ∈ inj₀ X ↔ a
    ∈ X := by
  simp only [inj₀, Set.mem_image, il]
  constructor
  · rintro ⟨a', ha', hb⟩; simp only [Option.some.injEq, Sum.inl.injEq] at hb; exact hb
    ▶ ha'
  · intro ha; exact ⟨a, ha, rfl⟩

def ir (b : β) : Option (α ? β) := some (Sum.inr b)

def inj₁ (Y : Set β) : Set (Option (α ? β)) := ir '' Y

@[simp] theorem ir_mem_inj₀ {X : Set α} {b : β} : (ir b : Option (α ? β)) ∈ inj₀ X :=
    by
  rintro ⟨a, _, hb⟩; exact absurd hb (by simp [il, ir])

@[simp] theorem none_mem_inj₀ {X : Set α} : (none : Option (α ? β)) ∈ inj₀ X := by
  rintro ⟨a, _, hb⟩; exact absurd hb (by simp [il])

@[simp] theorem ir_mem_inj₁ {Y : Set β} {b : β} : (ir b : Option (α ? β)) ∈ inj₁ Y ↔ b
    ∈ Y := by
  simp only [inj₁, Set.mem_image, ir]
  constructor
  · rintro ⟨b', hb', hb⟩; simp only [Option.some.injEq, Sum.inr.injEq] at hb; exact hb
    ▶ hb'
  · intro hb; exact ⟨b, hb, rfl⟩

@[simp] theorem il_mem_inj₁ {Y : Set β} {a : α} : (il a : Option (α ? β)) ∈ inj₁ Y :=
    by
  rintro ⟨b, _, hb⟩; exact absurd hb (by simp [il, ir])

@[simp] theorem none_mem_inj₁ {Y : Set β} : (none : Option (α ? β)) ∈ inj₁ Y := by
  rintro ⟨b, _, hb⟩; exact absurd hb (by simp [ir])

theorem inj₀_inter (X X' : Set α) :
    (inj₀ X ∩ inj₀ X' : Set (Option (α ? β))) = inj₀ (X ∩ X') := by
  ext t; rcases t with _ | (a | b) <;>
    simp [Set.mem_inter_iff, il, inj₀]

theorem inj₀_inter_inj₁ (X : Set α) (Y : Set β) :
```

```
    (inj₀ X ∩ inj₁ Y : Set (Option (α ? β))) = ∅ := by
  rw [Set.eq_empty_iff_forall_notMem]
  rintro t ⟨ht0, ht1⟩
  rcases t with _ | (a | b)
  · exact none_mem_inj₀ ht0
  · exact il_mem_inj₁ ht1
  · exact ir_mem_inj₀ ht0

theorem inj₀_nonempty {X : Set α} (hX : X.Nonempty) : (inj₀ X : Set (Option (α ? β))).
    Nonempty :=
  Set.Nonempty.image il hX

theorem inj₀_subset_inj₀ {X X' : Set α} :
    (inj₀ X : Set (Option (α ? β))) ⊆ inj₀ X' ↔ X ⊆ X' := by
  constructor
  · intro h a ha; exact il_mem_inj₀.mp (h (il_mem_inj₀.mpr ha))
  · intro h t ht
    rw [inj₀, Set.mem_image] at ht
    obtain ⟨a, ha, rfl⟩ := ht
    exact il_mem_inj₀.mpr (h ha)

theorem inj₁_inter (Y Y' : Set β) :
    (inj₁ Y ∩ inj₁ Y' : Set (Option (α ? β))) = inj₁ (Y ∩ Y') := by
  ext t; rcases t with _ | (a | b) <;>
    simp [Set.mem_inter_iff, ir, inj₁]

theorem inj₁_nonempty {Y : Set β} (hY : Y.Nonempty) : (inj₁ Y : Set (Option (α ? β))).
    Nonempty :=
  Set.Nonempty.image ir hY

theorem inj₁_subset_inj₁ {Y Y' : Set β} :
    (inj₁ Y : Set (Option (α ? β))) ⊆ inj₁ Y' ↔ Y ⊆ Y' := by
  constructor
  · intro h b hb; exact ir_mem_inj₁.mp (h (ir_mem_inj₁.mpr hb))
  · intro h t ht
    rw [inj₁, Set.mem_image] at ht
    obtain ⟨b, hb, rfl⟩ := ht
    exact ir_mem_inj₁.mpr (h hb)
end

section
open NeighborhoodSystem ApproximableMap
variable {α β : Type*}
variable (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)

def sumMaster : Set (Option (α ? β)) := insert none (inj₀ V₀.master ∪ inj₁ V₁.master)
end

section
open NeighborhoodSystem ApproximableMap
variable {α β : Type*}
variable (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
variable {V₀ V₁}

@[simp] theorem none_mem_sumMaster : (none : Option (α ? β)) ∈ sumMaster V₀ V₁ :=
  Set.mem_insert _ _
```

```
theorem il_injective : Function.Injective (il : α → Option (α ? β)) := by
  intro a a' h; simpa [il] using h

@[simp] theorem il_preimage_inj₀ (X : Set α) :
    ((il : α → Option (α ? β)) ^-1' inj₀ X) = X :=
  Set.preimage_image_eq X il_injective

theorem inj₀_subset_sumMaster {X : Set α} (hX : V₀.mem X) :
    (inj₀ X : Set (Option (α ? β))) ⊆ sumMaster V₀ V₁ := by
  intro t ht
  refine Set.mem_insert_iff.mpr (Or.inr (Set.mem_union_left _ ?_))
  exact (inj₀_subset_inj₀.mpr (V₀.sub_master hX)) ht

theorem inj₁_subset_sumMaster {Y : Set β} (hY : V₁.mem Y) :
    (inj₁ Y : Set (Option (α ? β))) ⊆ sumMaster V₀ V₁ := by
  intro t ht
  refine Set.mem_insert_iff.mpr (Or.inr (Set.mem_union_right _ ?_))
  exact (inj₁_subset_inj₁.mpr (V₁.sub_master hY)) ht

theorem ir_injective : Function.Injective (ir : β → Option (α ? β)) := by
  intro b b' h; simpa [ir] using h

@[simp] theorem ir_preimage_inj₁ (Y : Set β) :
    ((ir : β → Option (α ? β)) ^-1' inj₁ Y) = Y :=
  Set.preimage_image_eq Y ir_injective

def leftPart (V₀ : NeighborhoodSystem α) (W : Set (Option (α ? β))) : Set α :=
  il ^-1' W ∪ {a | a ∈ V₀.master ∧ ((∃ b : β, ir b ∈ W) ∨ (none : Option (α ? β)) ∈ W)
    }

@[simp] theorem mem_leftPart {V₀ : NeighborhoodSystem α} {W : Set (Option (α ? β))} {a
    : α} :
    a ∈ leftPart V₀ W ↔ il a ∈ W ∨ (a ∈ V₀.master ∧ ((∃ b : β, ir b ∈ W) ∨ none ∈ W))
    := by
  simp only [leftPart, Set.mem_union, Set.mem_preimage, Set.mem_ofPred_eq]

def rightPart (V₁ : NeighborhoodSystem β) (W : Set (Option (α ? β))) : Set β :=
  ir ^-1' W ∪ {b | b ∈ V₁.master ∧ ((∃ a : α, il a ∈ W) ∨ (none : Option (α ? β)) ∈ W)
    }

@[simp] theorem mem_rightPart {V₁ : NeighborhoodSystem β} {W : Set (Option (α ? β))} {b
    : β} :
    b ∈ rightPart V₁ W ↔ ir b ∈ W ∨ (b ∈ V₁.master ∧ ((∃ a : α, il a ∈ W) ∨ none ∈ W)
    ) := by
  simp only [rightPart, Set.mem_union, Set.mem_preimage, Set.mem_ofPred_eq]

@[simp] theorem leftPart_inj₀ (V₀ : NeighborhoodSystem α) (X : Set α) :
    leftPart V₀ (inj₀ X : Set (Option (α ? β))) = X := by
  ext a
  simp only [mem_leftPart, il_mem_inj₀, ir_mem_inj₀, none_mem_inj₀, exists_false,
    or_self,
    and_false]
  exact ⟨fun h => h.resolve_right (by simp), fun h => Or.inl h⟩

theorem leftPart_mono (V₀ : NeighborhoodSystem α) {W W' : Set (Option (α ? β))} (h : W
```

```
    ⊆ W') :
    leftPart V₀ W ⊆ leftPart V₀ W' := by
  intro a ha
  rw [mem_leftPart] at ha ⊢
  exact ha.imp (fun h' => h h') (fun ⟨hm, hc⟩ => ⟨hm, hc.imp (fun ⟨b, hb⟩ => ⟨b, h hb⟩) (
    fun hn => h hn)⟩)

@[simp] theorem rightPart_inj₁ (V₁ : NeighborhoodSystem β) (Y : Set β) :
    rightPart V₁ (inj₁ Y : Set (Option (α ? β))) = Y := by
  ext b
  simp only [mem_rightPart, ir_mem_inj₁, il_mem_inj₁, none_mem_inj₁, exists_false,
    or_self,
    and_false]
  exact ⟨fun h => h.resolve_right (by simp), fun h => Or.inl h⟩

theorem leftPart_inj₁ (V₀ : NeighborhoodSystem α) {Y : Set β} (hY : Y.Nonempty) :
    leftPart V₀ (inj₁ Y : Set (Option (α ? β))) = V₀.master := by
  ext a
  simp only [mem_leftPart, il_mem_inj₁, none_mem_inj₁, or_false, false_or]
  constructor
  · rintro ⟨ha, _⟩; exact ha
  · intro ha; obtain ⟨b, hb⟩ := hY; exact ⟨ha, ⟨b, ir_mem_inj₁.mpr hb⟩⟩

theorem leftPart_sumMaster (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    leftPart V₀ (sumMaster V₀ V₁) = V₀.master := by
  ext a
  simp only [mem_leftPart, none_mem_sumMaster, or_true, and_true]
  constructor
  · rintro (h | h)
    · have : (il a : Option (α ? β)) ∈ sumMaster V₀ V₁ := h
      rcases Set.mem_insert_iff.mp this with h' | h'
      · exact absurd h' (by simp [il])
      · rcases h' with h'' | h''
        · exact (il_mem_inj₀).mp h''
        · exact absurd h'' (by simp)
    · exact h
  · intro ha; exact Or.inr ha

theorem rightPart_inj₀ (V₁ : NeighborhoodSystem β) {X : Set α} (hX : X.Nonempty) :
    rightPart V₁ (inj₀ X : Set (Option (α ? β))) = V₁.master := by
  ext b
  simp only [mem_rightPart, ir_mem_inj₀, none_mem_inj₀, or_false, false_or]
  constructor
  · rintro ⟨hb, _⟩; exact hb
  · intro hb; obtain ⟨a, ha⟩ := hX; exact ⟨hb, ⟨a, il_mem_inj₀.mpr ha⟩⟩

theorem rightPart_mono (V₁ : NeighborhoodSystem β) {W W' : Set (Option (α ? β))} (h : W
    ⊆ W') :
    rightPart V₁ W ⊆ rightPart V₁ W' := by
  intro b hb
  rw [mem_rightPart] at hb ⊢
  exact hb.imp (fun h' => h h') (fun ⟨hm, hc⟩ => ⟨hm, hc.imp (fun ⟨a, ha⟩ => ⟨a, h ha⟩) (
    fun hn => h hn)⟩)

theorem rightPart_sumMaster (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    rightPart V₁ (sumMaster V₀ V₁) = V₁.master := by
```

```
  ext b
  simp only [mem_rightPart, none_mem_sumMaster, or_true, and_true]
  constructor
  · rintro (h | h)
    · have : (ir b : Option (α ? β)) ∈ sumMaster V₀ V₁ := h
      rcases Set.mem_insert_iff.mp this with h' | h'
      · exact absurd h' (by simp [ir])
      · rcases h' with h'' | h''
        · exact absurd h'' (by simp)
        · exact (ir_mem_inj₁).mp h''
    · exact h
  · intro hb; exact Or.inr hb

theorem sumMaster_inter_inj₀ {X : Set α} (hX : V₀.mem X) :
    (sumMaster V₀ V₁ ∩ inj₀ X : Set (Option (α ? β))) = inj₀ X :=
  Set.inter_eq_right.mpr (inj₀_subset_sumMaster hX)

theorem sumMaster_inter_inj₁ {Y : Set β} (hY : V₁.mem Y) :
    (sumMaster V₀ V₁ ∩ inj₁ Y : Set (Option (α ? β))) = inj₁ Y :=
  Set.inter_eq_right.mpr (inj₁_subset_sumMaster hY)

def sum (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty) :
    NeighborhoodSystem (Option (α ? β)) where
  mem W := W = sumMaster V₀ V₁ ∨ (∃ X, V₀.mem X ∧ W = inj₀ X) ∨ (∃ Y, V₁.mem Y ∧ W =
    inj₁ Y)
  master := sumMaster V₀ V₁
  master_nonempty := ⟨none, none_mem_sumMaster⟩
  master_mem := Or.inl rfl
  sub_master := by
    rintro W (rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩)
    · exact subset_rfl
    · exact inj₀_subset_sumMaster hX
    · exact inj₁_subset_sumMaster hY
  inter_mem := by

    have hne : ∀ W, (W = sumMaster V₀ V₁ ∨ (∃ X, V₀.mem X ∧ W = inj₀ X) ∨
        (∃ Y, V₁.mem Y ∧ W = inj₁ Y)) → (W : Set (Option (α ? β))).Nonempty := by
      rintro W (rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩)
      · exact ⟨none, none_mem_sumMaster⟩
      · exact inj₀_nonempty (h₀ X hX)
      · exact inj₁_nonempty (h₁ Y hY)
    rintro W W' Z hW hW' hZ hZsub
    rcases hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
      · rw [Set.inter_self]; exact Or.inl rfl
      · rw [sumMaster_inter_inj₀ hX']; exact Or.inr (Or.inl ⟨X', hX', rfl⟩)
      · rw [sumMaster_inter_inj₁ hY']; exact Or.inr (Or.inr ⟨Y', hY', rfl⟩)
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
      · rw [Set.inter_comm, sumMaster_inter_inj₀ hX]; exact Or.inr (Or.inl ⟨X, hX, rfl⟩)
      · rw [inj₀_inter] at hZsub ⊢

        rcases hZ with rfl | ⟨Z₀, hZ₀, rfl⟩ | ⟨Z₁, hZ₁, rfl⟩
        · exact absurd (hZsub none_mem_sumMaster) none_mem_inj₀
        · refine Or.inr (Or.inl ⟨X ∩ X', V₀.inter_mem hX hX' hZ₀ (inj₀_subset_inj₀.mp
    hZsub), rfl⟩)
```

```
        · obtain ⟨b, hb⟩ := h₁ Z₁ hZ₁
          exact absurd (hZsub (ir_mem_inj₁.mpr hb)) ir_mem_inj₀
      · rw [inj₀_inter_inj₁] at hZsub ⊢
        obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
      · rw [Set.inter_comm, sumMaster_inter_inj₁ hY]; exact Or.inr (Or.inr ⟨Y, hY, rfl⟩)
      · rw [Set.inter_comm, inj₀_inter_inj₁] at hZsub ⊢
        obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
      · rw [inj₁_inter] at hZsub ⊢
        rcases hZ with rfl | ⟨Z₀, hZ₀, rfl⟩ | ⟨Z₁, hZ₁, rfl⟩
        · exact absurd (hZsub none_mem_sumMaster) none_mem_inj₁
        · obtain ⟨a, ha⟩ := h₀ Z₀ hZ₀
          exact absurd (hZsub (il_mem_inj₀.mpr ha)) il_mem_inj₁
        · refine Or.inr (Or.inr ⟨Y ∩ Y', V₁.inter_mem hY hY' hZ₁ (inj₁_subset_inj₁.mp
    hZsub), rfl⟩)
end

section
open NeighborhoodSystem ApproximableMap
variable {α β : Type*}
variable (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
variable {V₀ V₁}
variable {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}

def inMap₀ : ApproximableMap V₀ (sum V₀ V₁ h₀ h₁) where
  rel X W := V₀.mem X ∧ (sum V₀ V₁ h₀ h₁).mem W ∧ inj₀ X ⊆ W
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨V₀.master_mem, (sum V₀ V₁ h₀ h₁).master_mem, inj₀_subset_sumMaster V₀.
    master_mem⟩
  inter_right := by
    rintro X W W' ⟨hX, hW, hsub⟩ ⟨_, hW', hsub'⟩
    exact ⟨hX, (sum V₀ V₁ h₀ h₁).inter_mem hW hW' (Or.inr (Or.inl ⟨X, hX, rfl⟩))
      (Set.subset_inter hsub hsub'), Set.subset_inter hsub hsub'⟩
  mono := by
    rintro X X' W W' ⟨_, _, hsub⟩ hX'X hWW' hX' hW'
    exact ⟨hX', hW', (inj₀_subset_inj₀.mpr hX'X).trans (hsub.trans hWW')⟩

def inMap₁ : ApproximableMap V₁ (sum V₀ V₁ h₀ h₁) where
  rel Y W := V₁.mem Y ∧ (sum V₀ V₁ h₀ h₁).mem W ∧ inj₁ Y ⊆ W
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨V₁.master_mem, (sum V₀ V₁ h₀ h₁).master_mem, inj₁_subset_sumMaster V₁.
    master_mem⟩
  inter_right := by
    rintro Y W W' ⟨hY, hW, hsub⟩ ⟨_, hW', hsub'⟩
    exact ⟨hY, (sum V₀ V₁ h₀ h₁).inter_mem hW hW' (Or.inr (Or.inr ⟨Y, hY, rfl⟩))
      (Set.subset_inter hsub hsub'), Set.subset_inter hsub hsub'⟩
  mono := by
    rintro Y Y' W W' ⟨_, _, hsub⟩ hY'Y hWW' hY' hW'
    exact ⟨hY', hW', (inj₁_subset_inj₁.mpr hY'Y).trans (hsub.trans hWW')⟩

theorem leftPart_mem {W : Set (Option (α ? β))} (hW : (sum V₀ V₁ h₀ h₁).mem W) :
    V₀.mem (leftPart V₀ W) := by
  rcases hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
  · rw [leftPart_sumMaster]; exact V₀.master_mem
```

```
  · rw [leftPart_inj₀]; exact hX
  · rw [leftPart_inj₁ V₀ (h₁ Y hY)]; exact V₀.master_mem

def outMap₀ : ApproximableMap (sum V₀ V₁ h₀ h₁) V₀ where
  rel W X := (sum V₀ V₁ h₀ h₁).mem W ∧ V₀.mem X ∧ leftPart V₀ W ⊆ X
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(sum V₀ V₁ h₀ h₁).master_mem, V₀.master_mem, (leftPart_sumMaster V₀ V₁).
    subset⟩
  inter_right := by
    rintro W X X' ⟨hW, hX, hsub⟩ ⟨_, hX', hsub'⟩
    exact ⟨hW, V₀.inter_mem hX hX' (leftPart_mem hW) (Set.subset_inter hsub hsub'),
      Set.subset_inter hsub hsub'⟩
  mono := by
    rintro W W' X X' ⟨_, _, hsub⟩ hW'W hXX' hW' hX'
    exact ⟨hW', hX', (leftPart_mono V₀ hW'W).trans (hsub.trans hXX')⟩

theorem rightPart_mem {W : Set (Option (α ? β))} (hW : (sum V₀ V₁ h₀ h₁).mem W) :
    V₁.mem (rightPart V₁ W) := by
  rcases hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
  · rw [rightPart_sumMaster]; exact V₁.master_mem
  · rw [rightPart_inj₀ V₁ (h₀ X hX)]; exact V₁.master_mem
  · rw [rightPart_inj₁]; exact hY

def outMap₁ : ApproximableMap (sum V₀ V₁ h₀ h₁) V₁ where
  rel W Y := (sum V₀ V₁ h₀ h₁).mem W ∧ V₁.mem Y ∧ rightPart V₁ W ⊆ Y
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(sum V₀ V₁ h₀ h₁).master_mem, V₁.master_mem, (rightPart_sumMaster V₀ V₁)
    .subset⟩
  inter_right := by
    rintro W Y Y' ⟨hW, hY, hsub⟩ ⟨_, hY', hsub'⟩
    exact ⟨hW, V₁.inter_mem hY hY' (rightPart_mem hW) (Set.subset_inter hsub hsub'),
      Set.subset_inter hsub hsub'⟩
  mono := by
    rintro W W' Y Y' ⟨_, _, hsub⟩ hW'W hYY' hW' hY'
    exact ⟨hW', hY', (rightPart_mono V₁ hW'W).trans (hsub.trans hYY')⟩
end

section
open NeighborhoodSystem ApproximableMap
variable {α β : Type*}

theorem inj₀_injective {X X' : Set α} (h : (inj₀ X : Set (Option (α ? β))) = inj₀ X') :
    X = X' :=
  Set.Subset.antisymm (inj₀_subset_inj₀.mp h.subset) (inj₀_subset_inj₀.mp h.symm.subset
    )

theorem inj₁_injective {Y Y' : Set β} (h : (inj₁ Y : Set (Option (α ? β))) = inj₁ Y') :
    Y = Y' :=
  Set.Subset.antisymm (inj₁_subset_inj₁.mp h.subset) (inj₁_subset_inj₁.mp h.symm.subset
    )
end

section
open NeighborhoodSystem ApproximableMap
```

```
variable {α β : Type*}
variable (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
variable {V₀ V₁}
variable {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}

theorem outMap₀_comp_inMap₀ :
    (outMap₀ (V₀ := V₀) (V₁ := V₁) (h₀ := h₀) (h₁ := h₁)).comp inMap₀ = idMap V₀ := by
  apply ApproximableMap.ext
  intro X Z
  constructor
  · rintro ⟨W, ⟨hX, _, hinj⟩, _, hZ, hsub⟩
    refine ⟨hX, hZ, ?_⟩
    have hXW : X ⊆ leftPart V₀ W := by
      intro a ha
      rw [mem_leftPart]; exact Or.inl (hinj (il_mem_inj₀.mpr ha))
    exact hXW.trans hsub
  · rintro ⟨hX, hZ, hXZ⟩
    refine ⟨inj₀ X, ⟨hX, Or.inr (Or.inl ⟨X, hX, rfl⟩), subset_rfl⟩,
      Or.inr (Or.inl ⟨X, hX, rfl⟩), hZ, ?_⟩
    rw [leftPart_inj₀]; exact hXZ

theorem outMap₁_comp_inMap₁ :
    (outMap₁ (V₀ := V₀) (V₁ := V₁) (h₀ := h₀) (h₁ := h₁)).comp inMap₁ = idMap V₁ := by
  apply ApproximableMap.ext
  intro Y Z
  constructor
  · rintro ⟨W, ⟨hY, _, hinj⟩, _, hZ, hsub⟩
    refine ⟨hY, hZ, ?_⟩
    have hYW : Y ⊆ rightPart V₁ W := by
      intro b hb
      rw [mem_rightPart]; exact Or.inl (hinj (ir_mem_inj₁.mpr hb))
    exact hYW.trans hsub
  · rintro ⟨hY, hZ, hYZ⟩
    refine ⟨inj₁ Y, ⟨hY, Or.inr (Or.inr ⟨Y, hY, rfl⟩), subset_rfl⟩,
      Or.inr (Or.inr ⟨Y, hY, rfl⟩), hZ, ?_⟩
    rw [rightPart_inj₁]; exact hYZ
end

section

set_option linter.unusedVariables false

theorem example_318.{u_1, u_2} : And
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
     X → @Set.Nonempty α X}
    {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
     Y → @Set.Nonempty β Y},
    @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V₀ V₀)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α (Option (Sum α β)) α
    V₀
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₀
        (@DomainTheory.NeighbourhoodSystems.outMap₀ α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁))
```

```
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap α V₀))
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
     X → @Set.Nonempty α X}
    {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
     Y → @Set.Nonempty β Y},
    @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap β β V₁ V₁)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp β (Option (Sum α β)) β
    V₁
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₁
        (@DomainTheory.NeighbourhoodSystems.outMap₁ α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap β V₁)) :=
  @And.intro
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
     X → @Set.Nonempty α X}
    {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
     Y → @Set.Nonempty β Y},
    @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V₀ V₀)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α (Option (Sum α β)) α
    V₀
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₀
        (@DomainTheory.NeighbourhoodSystems.outMap₀ α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap α V₀))
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
     X → @Set.Nonempty α X}
    {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
     Y → @Set.Nonempty β Y},
    @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap β β V₁ V₁)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp β (Option (Sum α β)) β
    V₁
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₁
        (@DomainTheory.NeighbourhoodSystems.outMap₁ α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap β V₁))
  @DomainTheory.NeighbourhoodSystems.outMap₀_comp_inMap₀ @DomainTheory.
    NeighbourhoodSystems.outMap₁_comp_inMap₁
end

section
open NeighborhoodSystem ApproximableMap
variable {α β α' β' : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
variable {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'}
variable {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}
variable {h₀' : ∀ X, V₀'.mem X → X.Nonempty} {h₁' : ∀ Y, V₁'.mem Y → Y.Nonempty}
```

```
theorem eq_sumMaster_of_subset {W : Set (Option (α ? β))}
    (hW : (sum V₀ V₁ h₀ h₁).mem W) (hsub : sumMaster V₀ V₁ ⊆ W) :
    W = sumMaster V₀ V₁ :=
  Set.Subset.antisymm ((sum V₀ V₁ h₀ h₁).sub_master hW) hsub

theorem mem_subset_inj₀ {W : Set (Option (α ? β))} {X : Set α}
    (hW : (sum V₀ V₁ h₀ h₁).mem W) (hsub : W ⊆ inj₀ X) :
    ∃ X₂, V₀.mem X₂ ∧ W = inj₀ X₂ := by
  rcases hW with rfl | ⟨X₂, hX₂, rfl⟩ | ⟨Y₂, hY₂, rfl⟩
  · exact absurd (hsub none_mem_sumMaster) none_mem_inj₀
  · exact ⟨X₂, hX₂, rfl⟩
  · obtain ⟨b, hb⟩ := h₁ Y₂ hY₂
    exact absurd (hsub (ir_mem_inj₁.mpr hb)) ir_mem_inj₀

theorem mem_subset_inj₁ {W : Set (Option (α ? β))} {Y : Set β}
    (hW : (sum V₀ V₁ h₀ h₁).mem W) (hsub : W ⊆ inj₁ Y) :
    ∃ Y₂, V₁.mem Y₂ ∧ W = inj₁ Y₂ := by
  rcases hW with rfl | ⟨X₂, hX₂, rfl⟩ | ⟨Y₂, hY₂, rfl⟩
  · exact absurd (hsub none_mem_sumMaster) none_mem_inj₁
  · obtain ⟨a, ha⟩ := h₀ X₂ hX₂
    exact absurd (hsub (il_mem_inj₀.mpr ha)) il_mem_inj₁
  · exact ⟨Y₂, hY₂, rfl⟩

theorem not_inj₀_subset_inj₁ {X : Set α} {Y : Set β} (hX : X.Nonempty)
    (hsub : (inj₀ X : Set (Option (α ? β))) ⊆ inj₁ Y) : False := by
  obtain ⟨a, ha⟩ := hX
  exact il_mem_inj₁ (hsub (il_mem_inj₀.mpr ha))

theorem not_inj₁_subset_inj₀ {X : Set α} {Y : Set β} (hY : Y.Nonempty)
    (hsub : (inj₁ Y : Set (Option (α ? β))) ⊆ inj₀ X) : False := by
  obtain ⟨b, hb⟩ := hY
  exact ir_mem_inj₀ (hsub (ir_mem_inj₁.mpr hb))

end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.20 Exercise 3.19 — induced maps on constructs

Suppose we are given systems and approximable mappings

$$f : \mathcal{D}_0 \to \mathcal{D}'_0 \quad \text{and} \quad g : \mathcal{D}_1 \to \mathcal{D}'_1.$$

Prove there are approximable mappings

$$f \times g : \mathcal{D}_0 \times \mathcal{D}_1 \to \mathcal{D}'_0 \times \mathcal{D}'_1 \quad \text{and} \quad f + g : \mathcal{D}_0 + \mathcal{D}_1 \to \mathcal{D}'_0 + \mathcal{D}'_1$$

such that

(i) $(f \times g)(x, y) = \langle f(x), g(y) \rangle$ for all $x \in |\mathcal{D}_0|$ and $y \in |\mathcal{D}_1|$, and rewrite this as:

(ii) $f \times g = \langle f \circ p_0, g \circ p_1 \rangle$.

In addition prove that

(iii) $out_0 \circ (f + g) \circ in_0 = f$, and

(iv) $out_1 \circ (f + g) \circ in_1 = g$.

Do equations (iii) and (iv) uniquely determine $f + g$?

Exercise_3_19.lean

```
module
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_18
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Definition_3_3
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_4
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
variable {α β α' β' : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
variable {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'}
variable {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}
variable {h₀' : ∀ X, V₀'.mem X → X.Nonempty} {h₁' : ∀ Y, V₁'.mem Y → Y.Nonempty}

def sumMap (f : ApproximableMap V₀ V₀') (g : ApproximableMap V₁ V₁') :
    ApproximableMap (sum V₀ V₁ h₀ h₁) (sum V₀' V₁' h₀' h₁') where
  rel W W' := (sum V₀ V₁ h₀ h₁).mem W ∧ (sum V₀' V₁' h₀' h₁').mem W' ∧
    (W' = sumMaster V₀' V₁' ∨
      (∃ X Y', W = inj₀ X ∧ W' = inj₀ Y' ∧ f.rel X Y') ∨
      (∃ Y Y', W = inj₁ Y ∧ W' = inj₁ Y' ∧ g.rel Y Y'))
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(sum V₀ V₁ h₀ h₁).master_mem, (sum V₀' V₁' h₀' h₁').master_mem, Or.inl
    rfl⟩
  inter_right := by
    rintro W W'₁ W'₂ ⟨hW, hW'₁, hd₁⟩ ⟨_, hW'₂, hd₂⟩

    have hmem : ∀ W'' : Set (Option (α' ⊕ β')),
        (W'' = sumMaster V₀' V₁' ∨
          (∃ X Y', W = inj₀ X ∧ W'' = inj₀ Y' ∧ f.rel X Y') ∨
          (∃ Y Y', W = inj₁ Y ∧ W'' = inj₁ Y' ∧ g.rel Y Y')) →
          (sum V₀' V₁' h₀' h₁').mem W'' := by
      rintro W'' (rfl | ⟨_, Y', _, rfl, hf⟩ | ⟨_, Y', _, rfl, hg⟩)
      · exact (sum V₀' V₁' h₀' h₁').master_mem
      · exact Or.inr (Or.inl ⟨Y', f.rel_cod hf, rfl⟩)
      · exact Or.inr (Or.inr ⟨Y', g.rel_cod hg, rfl⟩)

    have key : (W'₁ ∩ W'₂ = sumMaster V₀' V₁' ∨
        (∃ X Y', W = inj₀ X ∧ W'₁ ∩ W'₂ = inj₀ Y' ∧ f.rel X Y') ∨
        (∃ Y Y', W = inj₁ Y ∧ W'₁ ∩ W'₂ = inj₁ Y' ∧ g.rel Y Y')) := by
      rcases hd₁ with rfl | ⟨X, Y'₁, hWX₁, rfl, hf₁⟩ | ⟨Y, Y'₁, hWY₁, rfl, hg₁⟩
      · rw [Set.inter_eq_right.mpr
          (show W'₂ ⊆ sumMaster V₀' V₁' from (sum V₀' V₁' h₀' h₁').sub_master hW'₂)]
        exact hd₂
```

```
      · rcases hd₂ with rfl | ⟨X', Y'₂, hWX₂, rfl, hf₂⟩ | ⟨Y', Y'₂, hWY₂, rfl, hg₂⟩
        · rw [Set.inter_eq_left.mpr (inj₀_subset_sumMaster (f.rel_cod hf₁))]
          exact Or.inr (Or.inl ⟨X, Y'₁, hWX₁, rfl, hf₁⟩)
        · obtain rfl : X = X' := inj₀_injective (hWX₁.symm.trans hWX₂)
          rw [inj₀_inter]
          exact Or.inr (Or.inl ⟨X, Y'₁ ∩ Y'₂, hWX₁, rfl, f.inter_right hf₁ hf₂⟩)
        · exact absurd ((hWX₁.symm.trans hWY₂)) (fun h =>
            not_inj₀_subset_inj₁ (h₀ X (f.rel_dom hf₁)) h.subset)
      · rcases hd₂ with rfl | ⟨X', Y'₂, hWX₂, rfl, hf₂⟩ | ⟨Y', Y'₂, hWY₂, rfl, hg₂⟩
        · rw [Set.inter_eq_left.mpr (inj₁_subset_sumMaster (g.rel_cod hg₁))]
          exact Or.inr (Or.inr ⟨Y, Y'₁, hWY₁, rfl, hg₁⟩)
        · exact absurd ((hWY₁.symm.trans hWX₂)) (fun h =>
            not_inj₁_subset_inj₀ (h₁ Y (g.rel_dom hg₁)) h.subset)
        · obtain rfl : Y = Y' := inj₁_injective (hWY₁.symm.trans hWY₂)
          rw [inj₁_inter]
          exact Or.inr (Or.inr ⟨Y, Y'₁ ∩ Y'₂, hWY₁, rfl, g.inter_right hg₁ hg₂⟩)
    exact ⟨hW, hmem _ key, key⟩
  mono := by
    rintro W W₂ W' W'₂ ⟨hW, hW', hd⟩ hW₂W hW'W'₂ hW₂mem hW'₂mem
    refine ⟨hW₂mem, hW'₂mem, ?_⟩
    rcases hd with rfl | ⟨X, Y', rfl, rfl, hf⟩ | ⟨Y, Y', rfl, rfl, hg⟩
    ·
      left; exact eq_sumMaster_of_subset hW'₂mem hW'W'₂
    ·
      obtain ⟨X₂, hX₂, rfl⟩ := mem_subset_inj₀ hW₂mem hW₂W
      have hXX₂ : X₂ ⊆ X := inj₀_subset_inj₀.mp hW₂W
      rcases hW'₂mem with rfl | ⟨Y'₂, hY'₂, rfl⟩ | ⟨Z'₂, hZ'₂, rfl⟩
      · left; rfl
      · have hY'Y'₂ : Y' ⊆ Y'₂ := inj₀_subset_inj₀.mp hW'W'₂
        exact Or.inr (Or.inl ⟨X₂, Y'₂, rfl, rfl,
          f.mono hf hXX₂ hY'Y'₂ hX₂ hY'₂⟩)
      · exact (not_inj₀_subset_inj₁ (h₀' Y' (f.rel_cod hf)) hW'W'₂).elim
    ·
      obtain ⟨Y₂, hY₂, rfl⟩ := mem_subset_inj₁ hW₂mem hW₂W
      have hYY₂ : Y₂ ⊆ Y := inj₁_subset_inj₁.mp hW₂W
      rcases hW'₂mem with rfl | ⟨X'₂, hX'₂, rfl⟩ | ⟨Y'₂, hY'₂, rfl⟩
      · left; rfl
      · exact (not_inj₁_subset_inj₀ (h₁' Y' (g.rel_cod hg)) hW'W'₂).elim
      · have hY'Y'₂ : Y' ⊆ Y'₂ := inj₁_subset_inj₁.mp hW'W'₂
        exact Or.inr (Or.inr ⟨Y₂, Y'₂, rfl, rfl,
          g.mono hg hYY₂ hY'Y'₂ hY₂ hY'₂⟩)

theorem outMap₀_comp_sumMap_comp_inMap₀ (f : ApproximableMap V₀ V₀') (g :
    ApproximableMap V₁ V₁') :
    (outMap₀ (h₀ := h₀') (h₁ := h₁')).comp
      ((sumMap (h₀ := h₀) (h₁ := h₁) (h₀' := h₀') (h₁' := h₁') f g).comp
        (inMap₀ (h₀ := h₀) (h₁ := h₁))) = f := by
  apply ApproximableMap.ext
  intro X Z
  constructor
  · rintro ⟨W', ⟨W, ⟨hX, _, hinj⟩, hWmem, _, hd⟩, _, hZ, hleft⟩
    rcases hd with rfl | ⟨X₀, Y', hWX₀, rfl, hf⟩ | ⟨Y₀, Y', hWY₀, rfl, hg⟩
    ·
      rw [leftPart_sumMaster] at hleft
      have : Z = V₀'.master := Set.Subset.antisymm (V₀'.sub_master hZ) hleft
      subst this
```

```
      exact f.mono f.master_rel (V₀.sub_master hX) subset_rfl hX V₀'.master_mem
    .
      rw [leftPart_inj₀] at hleft
      have hXX₀ : X ⊆ X₀ := inj₀_subset_inj₀.mp (hWX₀ ▸ hinj)
      exact f.mono hf hXX₀ hleft hX hZ
    .
      exact (not_inj₀_subset_inj₁ (h₀ X hX) (hWY₀ ▸ hinj)).elim
  · intro hf
    refine ⟨inj₀ Z, ⟨inj₀ X, ⟨f.rel_dom hf, ?_, subset_rfl⟩, ?_, ?_, ?_⟩, ?_, f.rel_cod
    hf, ?_⟩
    · exact Or.inr (Or.inl ⟨X, f.rel_dom hf, rfl⟩)
    · exact Or.inr (Or.inl ⟨X, f.rel_dom hf, rfl⟩)
    · exact Or.inr (Or.inl ⟨Z, f.rel_cod hf, rfl⟩)
    · exact Or.inr (Or.inl ⟨X, Z, rfl, rfl, hf⟩)
    · exact Or.inr (Or.inl ⟨Z, f.rel_cod hf, rfl⟩)
    · exact (leftPart_inj₀ V₀' Z).subset

theorem outMap₁_comp_sumMap_comp_inMap₁ (f : ApproximableMap V₀ V₀') (g :
    ApproximableMap V₁ V₁') :
    (outMap₁ (h₀ := h₀') (h₁ := h₁')).comp
      ((sumMap (h₀ := h₀) (h₁ := h₁) (h₀' := h₀') (h₁' := h₁') f g).comp
        (inMap₁ (h₀ := h₀) (h₁ := h₁))) = g := by
  apply ApproximableMap.ext
  intro Y Z
  constructor
  · rintro ⟨W', ⟨W, ⟨hY, _, hinj⟩, hWmem, _, hd⟩, _, hZ, hright⟩
    rcases hd with rfl | ⟨X₀, Y', hWX₀, rfl, hf⟩ | ⟨Y₀, Y', hWY₀, rfl, hg⟩
    · rw [rightPart_sumMaster] at hright
      have : Z = V₁'.master := Set.Subset.antisymm (V₁'.sub_master hZ) hright
      subst this
      exact g.mono g.master_rel (V₁.sub_master hY) subset_rfl hY V₁'.master_mem
    · exact (not_inj₁_subset_inj₀ (h₁ Y hY) (hWX₀ ▸ hinj)).elim
    · rw [rightPart_inj₁] at hright
      have hYY₀ : Y ⊆ Y₀ := inj₁_subset_inj₁.mp (hWY₀ ▸ hinj)
      exact g.mono hg hYY₀ hright hY hZ
  · intro hg
    refine ⟨inj₁ Z, ⟨inj₁ Y, ⟨g.rel_dom hg, ?_, subset_rfl⟩, ?_, ?_, ?_⟩, ?_, g.rel_cod
    hg, ?_⟩
    · exact Or.inr (Or.inr ⟨Y, g.rel_dom hg, rfl⟩)
    · exact Or.inr (Or.inr ⟨Y, g.rel_dom hg, rfl⟩)
    · exact Or.inr (Or.inr ⟨Z, g.rel_cod hg, rfl⟩)
    · exact Or.inr (Or.inr ⟨Y, Z, rfl, rfl, hg⟩)
    · exact Or.inr (Or.inr ⟨Z, g.rel_cod hg, rfl⟩)
    · exact (rightPart_inj₁ V₁' Z).subset
end

section
set_option linter.unusedVariables false

theorem example_319_sum.{u_1, u_2, u_3, u_4} : And
  (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_3} {β' : Type u_4}
    {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
    {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
    {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
```

```
   X → @Set.Nonempty α X}
  {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
   Y → @Set.Nonempty β Y}
  {h₀' : ∀ (X : Set α'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α'
   V₀' X → @Set.Nonempty α' X}
  {h₁' : ∀ (Y : Set β'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β'
   V₁' Y → @Set.Nonempty β' Y}
  (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀')
  (g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'),
  @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀')
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α (Option (Sum α' β'))
  α' V₀
      (@DomainTheory.NeighbourhoodSystems.sum α' β' V₀' V₁' h₀' h₁') V₀'
      (@DomainTheory.NeighbourhoodSystems.outMap₀ α' β' V₀' V₁' h₀' h₁')
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α (Option (Sum α β))
  (Option (Sum α' β')) V₀
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.sum α' β' V₀' V₁' h₀' h₁')
        (@DomainTheory.NeighbourhoodSystems.sumMap α β α' β' V₀ V₁ V₀' V₁' h₀ h₁ h₀' h
  ₁' f g)
        (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁)))
    f)
(∀ {α : Type u_1} {β : Type u_2} {α' : Type u_3} {β' : Type u_4}
  {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
  {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
  {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
   X → @Set.Nonempty α X}
  {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
   Y → @Set.Nonempty β Y}
  {h₀' : ∀ (X : Set α'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α'
   V₀' X → @Set.Nonempty α' X}
  {h₁' : ∀ (Y : Set β'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β'
   V₁' Y → @Set.Nonempty β' Y}
  (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀')
  (g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'),
  @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁')
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp β (Option (Sum α' β'))
  β' V₁
      (@DomainTheory.NeighbourhoodSystems.sum α' β' V₀' V₁' h₀' h₁') V₁'
      (@DomainTheory.NeighbourhoodSystems.outMap₁ α' β' V₀' V₁' h₀' h₁')
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp β (Option (Sum α β))
  (Option (Sum α' β')) V₁
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.sum α' β' V₀' V₁' h₀' h₁')
        (@DomainTheory.NeighbourhoodSystems.sumMap α β α' β' V₀ V₁ V₀' V₁' h₀ h₁ h₀' h
  ₁' f g)
        (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁)))
    g) :=
@And.intro
(∀ {α : Type u_1} {β : Type u_2} {α' : Type u_3} {β' : Type u_4}
  {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
  {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
```

```
    {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
     X → @Set.Nonempty α X}
    {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
     Y → @Set.Nonempty β Y}
    {h₀' : ∀ (X : Set α'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α'
     V₀' X → @Set.Nonempty α' X}
    {h₁' : ∀ (Y : Set β'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β'
     V₁' Y → @Set.Nonempty β' Y}
    (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀')
    (g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'),
    @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀')
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α (Option (Sum α' β'))
    α' V₀
         (@DomainTheory.NeighbourhoodSystems.sum α' β' V₀' V₁' h₀' h₁') V₀'
         (@DomainTheory.NeighbourhoodSystems.outMap₀ α' β' V₀' V₁' h₀' h₁')
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α (Option (Sum α β))
    (Option (Sum α' β')) V₀
           (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
           (@DomainTheory.NeighbourhoodSystems.sum α' β' V₀' V₁' h₀' h₁')
           (@DomainTheory.NeighbourhoodSystems.sumMap α β α' β' V₀ V₁ V₀' V₁' h₀ h₁ h₀' h
    ₁' f g)
           (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁)))
      f)
  (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_3} {β' : Type u_4}
    {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
    {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
    {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
     X → @Set.Nonempty α X}
    {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
     Y → @Set.Nonempty β Y}
    {h₀' : ∀ (X : Set α'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α'
     V₀' X → @Set.Nonempty α' X}
    {h₁' : ∀ (Y : Set β'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β'
     V₁' Y → @Set.Nonempty β' Y}
    (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀')
    (g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'),
    @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁')
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp β (Option (Sum α' β'))
    β' V₁
         (@DomainTheory.NeighbourhoodSystems.sum α' β' V₀' V₁' h₀' h₁') V₁'
         (@DomainTheory.NeighbourhoodSystems.outMap₁ α' β' V₀' V₁' h₀' h₁')
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp β (Option (Sum α β))
    (Option (Sum α' β')) V₁
           (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
           (@DomainTheory.NeighbourhoodSystems.sum α' β' V₀' V₁' h₀' h₁')
           (@DomainTheory.NeighbourhoodSystems.sumMap α β α' β' V₀ V₁ V₀' V₁' h₀ h₁ h₀' h
    ₁' f g)
           (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁)))
      g)
  @DomainTheory.NeighbourhoodSystems.outMap₀_comp_sumMap_comp_inMap₀
  @DomainTheory.NeighbourhoodSystems.outMap₁_comp_sumMap_comp_inMap₁
end

section
```

```
open NeighborhoodSystem ApproximableMap
variable {α β ? α' β' : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}
variable {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'}

def prodMap (f : ApproximableMap V₀ V₀') (g : ApproximableMap V₁ V₁') :
    ApproximableMap (prod V₀ V₁) (prod V₀' V₁') :=
  paired (f.comp (proj₀ V₀ V₁)) (g.comp (proj₁ V₀ V₁))

theorem toElementMap_prodMap (f : ApproximableMap V₀ V₀') (g : ApproximableMap V₁ V₁')
    (w : (prod V₀ V₁).Element) :
    (prodMap f g).toElementMap w = pair (f.toElementMap w.fst) (g.toElementMap w.snd)
    := by
  rw [prodMap, toElementMap_paired, toElementMap_comp, toElementMap_comp,
    toElementMap_proj₀,
    toElementMap_proj₁]

theorem toElementMap_prodMap_pair (f : ApproximableMap V₀ V₀') (g : ApproximableMap V₁
    V₁')
    (x : V₀.Element) (y : V₁.Element) :
    (prodMap f g).toElementMap (pair x y) = pair (f.toElementMap x) (g.toElementMap y)
     := by
  rw [toElementMap_prodMap, fst_pair, snd_pair]
end

section
set_option linter.unusedVariables false

theorem example_319.{u_1, u_2, u_4, u_5} : And
  (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
    {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
    {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
    (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀')
    (g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁')
    (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
    (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Sum α' β')
        (@DomainTheory.NeighbourhoodSystems.prod α' β' V₀' V₁'))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap (Sum α β) (Sum
    α' β')
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) (@DomainTheory.
    NeighbourhoodSystems.prod α' β' V₀' V₁')
        (@DomainTheory.NeighbourhoodSystems.prodMap α β α' β' V₀ V₁ V₀' V₁' f g)
        (@DomainTheory.NeighbourhoodSystems.pair α β V₀ V₁ x y))
      (@DomainTheory.NeighbourhoodSystems.pair α' β' V₀' V₁'
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α' V₀ V₀' f
    x)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap β β' V₁ V₁' g
    y)))
  (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
    {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
```

```
  {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
  {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
  (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀')
  (g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁')
  (w :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Sum α β)
      (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁)),
  @Eq
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Sum α' β')
      (@DomainTheory.NeighbourhoodSystems.prod α' β' V₀' V₁'))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap (Sum α β) (Sum
  α' β')
      (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) (@DomainTheory.
  NeighbourhoodSystems.prod α' β' V₀' V₁')
      (@DomainTheory.NeighbourhoodSystems.prodMap α β α' β' V₀ V₁ V₀' V₁' f g) w)
    (@DomainTheory.NeighbourhoodSystems.pair α' β' V₀' V₁'
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α' V₀ V₀' f
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.fst α β V₀ V₁
  w))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap β β' V₁ V₁' g
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.snd α β V₀ V₁
  w)))) :=
@And.intro
(∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
  {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
  {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
  (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀')
  (g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁')
  (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
  (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁),
  @Eq
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Sum α' β')
      (@DomainTheory.NeighbourhoodSystems.prod α' β' V₀' V₁'))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap (Sum α β) (Sum
  α' β')
      (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) (@DomainTheory.
  NeighbourhoodSystems.prod α' β' V₀' V₁')
      (@DomainTheory.NeighbourhoodSystems.prodMap α β α' β' V₀ V₁ V₀' V₁' f g)
      (@DomainTheory.NeighbourhoodSystems.pair α β V₀ V₁ x y))
    (@DomainTheory.NeighbourhoodSystems.pair α' β' V₀' V₁'
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α' V₀ V₀' f
  x)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap β β' V₁ V₁' g
  y)))
(∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
  {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
  {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
  (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀')
  (g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁')
  (w :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Sum α β)
      (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁)),
```

```
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Sum α' β')
        (@DomainTheory.NeighbourhoodSystems.prod α' β' V₀' V₁'))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap (Sum α β) (Sum
    α' β')
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) (@DomainTheory.
    NeighbourhoodSystems.prod α' β' V₀' V₁')
        (@DomainTheory.NeighbourhoodSystems.prodMap α β α' β' V₀ V₁ V₀' V₁' f g) w)
      (@DomainTheory.NeighbourhoodSystems.pair α' β' V₀' V₁'
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α' V₀ V₀' f
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.fst α β V₀ V₁
    w))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap β β' V₁ V₁' g
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.snd α β V₀ V₁
    w))))
  @DomainTheory.NeighbourhoodSystems.toElementMap_prodMap_pair @DomainTheory.
    NeighbourhoodSystems.toElementMap_prodMap
end
end DomainTheory.NeighbourhoodSystems
end
```

— Pref-folded `sumMap` companions

3.4.21 Exercise 3.20 — sum and product functors

(For category theorists). Show that the result of 3.19 can be used to prove that $+$ and $\times$ on the category of domains and approximable maps are indeed functors. Show further that $\times$ is the categorical product for this category.

`Exercise_3_20.lean`

```
module
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_19
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_4
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
variable {α β ? α' β' : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}
variable {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'}

theorem paired_unique (h₀ : ApproximableMap V₂ V₀) (h₁ : ApproximableMap V₂ V₁)
    (k : ApproximableMap V₂ (prod V₀ V₁)) (hk₀ : (proj₀ V₀ V₁).comp k = h₀)
    (hk₁ : (proj₁ V₀ V₁).comp k = h₁) : k = paired h₀ h₁ := by
  rw [← hk₀, ← hk₁, paired_proj]

theorem proj_paired (h₀ : ApproximableMap V₂ V₀) (h₁ : ApproximableMap V₂ V₁) :
    (proj₀ V₀ V₁).comp (paired h₀ h₁) = h₀ ∧ (proj₁ V₀ V₁).comp (paired h₀ h₁) = h₁ :=
  ⟨proj₀_comp_paired h₀ h₁, proj₁_comp_paired h₀ h₁⟩
```

```
theorem prodMap_comp {α'' β'' : Type*} {V₀'' : NeighborhoodSystem α''} {V₁'' :
    NeighborhoodSystem β''}
    (f' : ApproximableMap V₀' V₀'') (f : ApproximableMap V₀ V₀')
    (g' : ApproximableMap V₁' V₁'') (g : ApproximableMap V₁ V₁') :
    prodMap (f'.comp f) (g'.comp g) = (prodMap f' g').comp (prodMap f g) := by
  apply ext_of_toElementMap
  intro w
  rw [toElementMap_prodMap, toElementMap_comp, toElementMap_comp, toElementMap_comp,
    toElementMap_prodMap, toElementMap_prodMap, fst_pair, snd_pair]

theorem prodMap_id : prodMap (idMap V₀) (idMap V₁) = idMap (prod V₀ V₁) := by
  apply ext_of_toElementMap
  intro w
  rw [toElementMap_prodMap, toElementMap_idMap, toElementMap_idMap, toElementMap_idMap
    ,
    pair_fst_snd]
end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.22 Exercise 3.21 — identity of step neighbourhoods

In the proofs of 3.12 in the definition of curry (g) it is rather cavalierly assumed that the neighbourhood $[Y, Z]$ uniquely determines Y and Z. Show that this is true if $Z \neq \Delta_2$. (Hint: Find explicitly the least of $f \in [Y, Z]$.) Show that if $Z = \Delta_2$ the biconditional stated at the start of the proof is still valid even though Y is not uniquely determined. (Hint: Remember that $\Delta_1\ g\ \Delta_2$ must hold.) For arbitrary pairs of neighbourhoods of $(D_1 \to D_2)$ is there a simple criterion for identity?

Exercise_3_21.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
section
variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

theorem interYs_single_not_subset_eq {YX : Set α} {Z : Set β} {X : Set α}
    (hXY : ¬ X ⊆ YX) : interYs V₁.master [(YX, Z)] X = V₁.master := by
  ext z
  rw [mem_interYs]
  constructor
  · rintro ⟨hm, _⟩; exact hm
  · intro hz
    exact ⟨hz, fun p hp hXp => by rw [List.mem_singleton] at hp; subst hp; exact absurd
     hXp hXY⟩

theorem interYs_single_subset_eq {YX : Set α} {Z : Set β} {X : Set α} (hZ : V₁.mem Z)
    (hXY : X ⊆ YX) : interYs V₁.master [(YX, Z)] X = Z := by
```

```
  ext z
  rw [mem_interYs]
  constructor
  · rintro ⟨_, hall⟩; exact hall (YX, Z) (List.mem_singleton.mpr rfl) hXY
  · intro hz
    exact ⟨V₁.sub_master hZ hz, fun p hp _ => by rw [List.mem_singleton] at hp; subst
    hp; exact hz⟩

theorem stepCons {Y : Set α} {Z : Set β} (hZ : V₁.mem Z) :
    ∀ {X}, V₀.mem X → V₁.mem (interYs V₁.master [(Y, Z)] X) := by
  intro X _
  by_cases hXY : X ⊆ Y
  · rw [interYs_single_subset_eq hZ hXY]; exact hZ
  · rw [interYs_single_not_subset_eq hXY]; exact V₁.master_mem

def leastStep (Y : Set α) (Z : Set β) (hY : V₀.mem Y) (hZ : V₁.mem Z) :
    ApproximableMap V₀ V₁ :=
  leastMap [(Y, Z)] (by rintro p hp; rw [List.mem_singleton] at hp; subst hp; exact ⟨hY
    , hZ⟩)
    (stepCons hZ)

theorem leastStep_le {Y : Set α} {Z : Set β} (hY : V₀.mem Y) (hZ : V₁.mem Z)
    {f : ApproximableMap V₀ V₁} (hf : f ∈ step Y Z) : leastStep Y Z hY hZ ≤ f := by
  apply leastMap_le
  rw [stepFun_singleton]; exact hf

theorem leastStep_mem {Y : Set α} {Z : Set β} (hY : V₀.mem Y) (hZ : V₁.mem Z) :
    leastStep Y Z hY hZ ∈ step Y Z := by
  have := leastMap_mem_stepFun (V₀ := V₀) (V₁ := V₁)
    (L := [(Y, Z)]) (by rintro p hp; rw [List.mem_singleton] at hp; subst hp; exact ⟨hY
    , hZ⟩)
    (stepCons hZ)
  rw [stepFun_singleton] at this
  exact this

theorem leastStep_eq_of_step_eq {Y : Set α} {Z : Set β} (hY : V₀.mem Y) (hZ : V₁.mem Z)
    {Y' : Set α} {Z' : Set β} (hY' : V₀.mem Y') (hZ' : V₁.mem Z')
    (h : (step Y Z : Set (ApproximableMap V₀ V₁)) = step Y' Z') :
    leastStep Y Z hY hZ = leastStep Y' Z' hY' hZ' := by
  apply le_antisymm
  · exact leastStep_le hY hZ (h ▸ leastStep_mem hY' hZ')
  · exact leastStep_le hY' hZ' (h.symm ▸ leastStep_mem hY hZ)

theorem leastStep_rel {Y : Set α} {Z : Set β} (hY : V₀.mem Y) (hZ : V₁.mem Z)
    {Y' : Set α} {Z' : Set β} (hY' : V₀.mem Y') (hZ' : V₁.mem Z') :
    (leastStep Y Z hY hZ).rel Y' Z' ↔ interYs V₁.master [(Y, Z)] Y' ⊆ Z' := by
  rw [leastStep, leastMap_rel]
  exact ⟨fun h => h.2.2, fun h => ⟨hY', hZ', h⟩⟩

theorem step_master_right (Y : Set α) (hY : V₀.mem Y) :
    (step Y V₁.master : Set (ApproximableMap V₀ V₁)) = Set.univ := by
  ext f
  simp only [mem_step, Set.mem_univ, iff_true]
  exact f.mono f.master_rel (V₀.sub_master hY) subset_rfl hY V₁.master_mem

theorem step_eq_univ_iff {Y : Set α} {Z : Set β} (hY : V₀.mem Y) (hZ : V₁.mem Z) :
```

```
    (step Y Z : Set (ApproximableMap V₀ V₁)) = Set.univ ↔ Z = V₁.master := by
  constructor
  · intro h

    have hmem : leastMap (V₀ := V₀) (V₁ := V₁) ([] : List (Set α × Set β))
        (by simp) (fun {X} _ => by rw [interYs_nil]; exact V₁.master_mem) ∈ step Y Z :=
     by
      rw [h]; exact Set.mem_univ _
    rw [mem_step, leastMap_rel] at hmem
    have : V₁.master ⊆ Z := by rw [← interYs_nil V₁.master Y]; exact hmem.2.2
    exact Set.Subset.antisymm (V₁.sub_master hZ) this
  · rintro rfl; exact step_master_right Y hY

theorem step_eq_of_ne_master {Y : Set α} {Z : Set β} (hY : V₀.mem Y) (hZ : V₁.mem Z)
    {Y' : Set α} {Z' : Set β} (hY' : V₀.mem Y') (hZ' : V₁.mem Z') (hZne : Z = V₁.master
    )
    (h : (step Y Z : Set (ApproximableMap V₀ V₁)) = step Y' Z') : Y = Y' ∧ Z = Z' := by

  have hZ'ne : Z' = V₁.master := by
    intro hZ'eq
    rw [hZ'eq, step_master_right Y' hY'] at h
    exact hZne ((step_eq_univ_iff hY hZ).mp h)
  have hfeq := leastStep_eq_of_step_eq hY hZ hY' hZ' h

  have h1 : (leastStep Y Z hY hZ).rel Y' Z' := by
    rw [hfeq]; exact (leastStep_mem hY' hZ')
  have h2 : (leastStep Y' Z' hY' hZ').rel Y Z := by
    rw [← hfeq]; exact (leastStep_mem hY hZ)
  rw [leastStep_rel hY hZ hY' hZ'] at h1
  rw [leastStep_rel hY' hZ' hY hZ] at h2

  have hY'Y : Y' ⊆ Y := by
    by_contra hns
    rw [interYs_single_not_subset_eq hns] at h1
    exact hZ'ne (Set.Subset.antisymm (V₁.sub_master hZ') h1)
  have hZZ' : Z ⊆ Z' := by
    rw [interYs_single_subset_eq hZ hY'Y] at h1; exact h1

  have hYY' : Y ⊆ Y' := by
    by_contra hns
    rw [interYs_single_not_subset_eq hns] at h2
    exact hZne (Set.Subset.antisymm (V₁.sub_master hZ) h2)
  have hZ'Z : Z' ⊆ Z := by
    rw [interYs_single_subset_eq hZ' hYY'] at h2; exact h2
  exact ⟨Set.Subset.antisymm hYY' hY'Y, Set.Subset.antisymm hZZ' hZ'Z⟩

theorem step_eq_iff {Y : Set α} {Z : Set β} (hY : V₀.mem Y) (hZ : V₁.mem Z)
    {Y' : Set α} {Z' : Set β} (hY' : V₀.mem Y') (hZ' : V₁.mem Z') :
    (step Y Z : Set (ApproximableMap V₀ V₁)) = step Y' Z' ↔
      (Z = V₁.master ∧ Z' = V₁.master) ∨ (Y = Y' ∧ Z = Z') := by
  constructor
  · intro h
    by_cases hZeq : Z = V₁.master
    · refine Or.inl ⟨hZeq, ?_⟩
      rw [hZeq, step_master_right Y hY] at h
      exact (step_eq_univ_iff hY' hZ').mp h.symm
```

```
    · exact Or.inr (step_eq_of_ne_master hY hZ hY' hZ' hZeq h)
  · rintro (⟨rfl, rfl⟩ | ⟨rfl, rfl⟩)
    · rw [step_master_right Y hY, step_master_right Y' hY']
    · rfl
end

section
set_option linter.unusedVariables false

theorem example_321.{u_1, u_2} : And
  (And
    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β} {Y : Set α} {Z :
    Set β},
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ Y →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁ Z →
          ∀ {Y' : Set α} {Z' : Set β},
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ Y' →
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁ Z' →
                Iff
                  (@Eq (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀
    V₁))
                    (@DomainTheory.NeighbourhoodSystems.step α β V₀ V₁ Y Z)
                    (@DomainTheory.NeighbourhoodSystems.step α β V₀ V₁ Y' Z'))
                  (Or
                    (And (@Eq (Set β) Z (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.master β V₁))
                      (@Eq (Set β) Z' (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.master β V₁)))
                    (And (@Eq (Set α) Y Y') (@Eq (Set β) Z Z'))))
    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β} {Y : Set α} {Z :
    Set β},
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ Y →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁ Z →
          ∀ {Y' : Set α} {Z' : Set β},
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ Y' →
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁ Z' →
                @Ne (Set β) Z (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    master β V₁) →
                  @Eq (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V
    ₁))
                    (@DomainTheory.NeighbourhoodSystems.step α β V₀ V₁ Y Z)
                    (@DomainTheory.NeighbourhoodSystems.step α β V₀ V₁ Y' Z') →
                  And (@Eq (Set α) Y Y') (@Eq (Set β) Z Z')))
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β} (Y : Set α),
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ Y →
      @Eq (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁))
        (@DomainTheory.NeighbourhoodSystems.step α β V₀ V₁ Y
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.master β V₁))
        (@Set.univ (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁))) :=
  @And.intro
```

```
(And
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β} {Y : Set α} {Z :
 Set β},
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ Y →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁ Z →
        ∀ {Y' : Set α} {Z' : Set β},
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ Y' →
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁ Z' →
              Iff
                (@Eq (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀
 V₁))
                  (@DomainTheory.NeighbourhoodSystems.step α β V₀ V₁ Y Z)
                  (@DomainTheory.NeighbourhoodSystems.step α β V₀ V₁ Y' Z'))
                (Or
                  (And (@Eq (Set β) Z (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.master β V₁))
                    (@Eq (Set β) Z' (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.master β V₁)))
                  (And (@Eq (Set α) Y Y') (@Eq (Set β) Z Z'))))
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β} {Y : Set α} {Z :
 Set β},
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ Y →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁ Z →
        ∀ {Y' : Set α} {Z' : Set β},
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ Y' →
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁ Z' →
              @Ne (Set β) Z (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 master β V₁) →
                @Eq (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V
 ₁))
                  (@DomainTheory.NeighbourhoodSystems.step α β V₀ V₁ Y Z)
                  (@DomainTheory.NeighbourhoodSystems.step α β V₀ V₁ Y' Z') →
                And (@Eq (Set α) Y Y') (@Eq (Set β) Z Z')))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β} (Y : Set α),
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ Y →
    @Eq (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁))
      (@DomainTheory.NeighbourhoodSystems.step α β V₀ V₁ Y
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.master β V₁))
      (@Set.univ (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)))
(@And.intro
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β} {Y : Set α} {Z :
 Set β},
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ Y →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁ Z →
        ∀ {Y' : Set α} {Z' : Set β},
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ Y' →
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁ Z' →
              Iff
```

```
                (@Eq (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀
    V₁))
                  (@DomainTheory.NeighbourhoodSystems.step α β V₀ V₁ Y Z)
                  (@DomainTheory.NeighbourhoodSystems.step α β V₀ V₁ Y' Z'))
                (Or
                  (And (@Eq (Set β) Z (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.master β V₁))
                    (@Eq (Set β) Z' (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.master β V₁)))
                  (And (@Eq (Set α) Y Y') (@Eq (Set β) Z Z'))))
    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β} {Y : Set α} {Z :
    Set β},
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ Y →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁ Z →
          ∀ {Y' : Set α} {Z' : Set β},
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ Y' →
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁ Z' →
                @Ne (Set β) Z (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    master β V₁) →
                  @Eq (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V
    ₁))
                    (@DomainTheory.NeighbourhoodSystems.step α β V₀ V₁ Y Z)
                    (@DomainTheory.NeighbourhoodSystems.step α β V₀ V₁ Y' Z') →
                  And (@Eq (Set α) Y Y') (@Eq (Set β) Z Z'))
    @DomainTheory.NeighbourhoodSystems.step_eq_iff @DomainTheory.NeighbourhoodSystems.
    step_eq_of_ne_master)
  @DomainTheory.NeighbourhoodSystems.step_master_right
end
end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.23 Exercise 3.22 — composition combinator

Prove that there is an approximable mapping

$$\text{comp} : (D_1 \to D_2) \times (D_0 \to D_1) \to (D_0 \to D_2)$$

where for all $g : D_1 \to D_2$ and $f : D_0 \to D_1$ we have

$$\text{comp}(g, f) = g \circ f.$$

Show this directly by writing down the neighbourhood relation and by building the mapping up from eval and curry (on suitable domains) using $\circ$ and $\langle , \rangle$. (Hint: Fill in maps in the following sequence of domains:

1. $(D_0 \to D_1) \times D_0 \to D_1$
2. $(D_1 \to D_2) \times ((D_0 \to D_1) \times D_0) \to (D_1 \to D_2) \times D_1$
3. $((D_1 \to D_2) \times (D_0 \to D_1)) \times D_0 \to (D_1 \to D_2) \times D_1$

4. $((D_1 \to D_2) \times (D_0 \to D_1)) \times D_0 \to D_2$

5. $(D_1 \to D_2) \times (D_0 \to D_1) \to (D_0 \to D_2)$.

The maps are of course not uniquely determined, but the shifting of brackets ought to suggest the right choice.)

Exercise_3_22.lean

```
module
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
section
variable {α β ? : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

def compApp (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) (V₂ :
    NeighborhoodSystem ?) :
    ApproximableMap (prod (prod (funSpace V₁ V₂) (funSpace V₀ V₁)) V₀) V₂ :=
  (evalMap V₁ V₂).comp
    (paired
      ((proj₀ (funSpace V₁ V₂) (funSpace V₀ V₁)).comp
        (proj₀ (prod (funSpace V₁ V₂) (funSpace V₀ V₁)) V₀))
      ((evalMap V₀ V₁).comp
        (paired
          ((proj₁ (funSpace V₁ V₂) (funSpace V₀ V₁)).comp
            (proj₀ (prod (funSpace V₁ V₂) (funSpace V₀ V₁)) V₀))
          (proj₁ (prod (funSpace V₁ V₂) (funSpace V₀ V₁)) V₀))))

def compMap (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) (V₂ :
    NeighborhoodSystem ?) :
    ApproximableMap (prod (funSpace V₁ V₂) (funSpace V₀ V₁)) (funSpace V₀ V₂) :=
  curry (compApp V₀ V₁ V₂)

theorem toElementMap_compApp (Gφ : (funSpace V₁ V₂).Element) (Fφ : (funSpace V₀ V₁).
    Element)
    (x : V₀.Element) :
    (compApp V₀ V₁ V₂).toElementMap (pair (pair Gφ Fφ) x)
      = (toApproxMap Gφ).toElementMap ((toApproxMap Fφ).toElementMap x) := by
  rw [compApp]
  simp only [toElementMap_comp, toElementMap_paired, toElementMap_proj₀,
    toElementMap_proj₁,
    fst_pair, snd_pair, evalMap_apply]

theorem toElementMap_compMap_apply (Gφ : (funSpace V₁ V₂).Element) (Fφ : (funSpace V₀ V
    ₁).Element)
    (x : V₀.Element) :
    (toApproxMap ((compMap V₀ V₁ V₂).toElementMap (pair Gφ Fφ))).toElementMap x
      = (toApproxMap Gφ).toElementMap ((toApproxMap Fφ).toElementMap x) := by
```

```
  rw [compMap, toElementMap_curry_apply, toElementMap_compApp]

theorem toApproxMap_compMap (Gφ : (funSpace V₁ V₂).Element) (Fφ : (funSpace V₀ V₁).
    Element) :
    toApproxMap ((compMap V₀ V₁ V₂).toElementMap (pair Gφ Fφ))
      = (toApproxMap Gφ).comp (toApproxMap Fφ) := by
  apply ext_of_toElementMap
  intro x
  rw [toElementMap_compMap_apply, toElementMap_comp]
end

section
set_option linter.unusedVariables false

theorem example_322.{u_1, u_2, u_3} : And
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
    NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
    (Gφ :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
    (Fφ :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
        (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)),
    @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
      (@DomainTheory.NeighbourhoodSystems.toApproxMap α ? V₀ V₂
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
          (Sum (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
          (@DomainTheory.NeighbourhoodSystems.prod (@DomainTheory.NeighbourhoodSystems
    .ApproximableMap β ? V₁ V₂)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
            (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)
            (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁))
          (@DomainTheory.NeighbourhoodSystems.funSpace α ? V₀ V₂)
          (@DomainTheory.NeighbourhoodSystems.compMap α β ? V₀ V₁ V₂)
          (@DomainTheory.NeighbourhoodSystems.pair (@DomainTheory.NeighbourhoodSystems
    .ApproximableMap β ? V₁ V₂)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
            (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)
            (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) Gφ Fφ)))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α β ? V₀ V₁ V₂
        (@DomainTheory.NeighbourhoodSystems.toApproxMap β ? V₁ V₂ Gφ)
        (@DomainTheory.NeighbourhoodSystems.toApproxMap α β V₀ V₁ Fφ)))
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
    NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
    (Gφ :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
```

```
  (Fφ :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
      (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁))
  (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀),
  @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element ? V₂)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α ? V₀ V₂
      (@DomainTheory.NeighbourhoodSystems.toApproxMap α ? V₀ V₂
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
          (Sum (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
          (@DomainTheory.NeighbourhoodSystems.prod (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
            (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)
            (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁))
          (@DomainTheory.NeighbourhoodSystems.funSpace α ? V₀ V₂)
          (@DomainTheory.NeighbourhoodSystems.compMap α β ? V₀ V₁ V₂)
          (@DomainTheory.NeighbourhoodSystems.pair (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
            (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)
            (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) Gφ Fφ)))
      x)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap β ? V₁ V₂
      (@DomainTheory.NeighbourhoodSystems.toApproxMap β ? V₁ V₂ Gφ)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α β V₀ V₁
        (@DomainTheory.NeighbourhoodSystems.toApproxMap α β V₀ V₁ Fφ) x))) :=
@And.intro
(∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
  NeighbourhoodSystems.NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
  (Gφ :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
      (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
  (Fφ :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
      (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)),
  @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
    (@DomainTheory.NeighbourhoodSystems.toApproxMap α ? V₀ V₂
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
        (Sum (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
        (@DomainTheory.NeighbourhoodSystems.prod (@DomainTheory.NeighbourhoodSystems
  .ApproximableMap β ? V₁ V₂)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
          (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)
          (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁))
        (@DomainTheory.NeighbourhoodSystems.funSpace α ? V₀ V₂)
        (@DomainTheory.NeighbourhoodSystems.compMap α β ? V₀ V₁ V₂)
        (@DomainTheory.NeighbourhoodSystems.pair (@DomainTheory.NeighbourhoodSystems
```

```
    .ApproximableMap β ? V₁ V₂)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
            (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)
            (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) Gφ Fφ)))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α β ? V₀ V₁ V₂
        (@DomainTheory.NeighbourhoodSystems.toApproxMap β ? V₁ V₂ Gφ)
        (@DomainTheory.NeighbourhoodSystems.toApproxMap α β V₀ V₁ Fφ)))
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
    NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
    (Gφ :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
    (Fφ :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
        (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁))
    (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀),
    @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element ? V₂)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α ? V₀ V₂
        (@DomainTheory.NeighbourhoodSystems.toApproxMap α ? V₀ V₂
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
            (Sum (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁))
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
            (@DomainTheory.NeighbourhoodSystems.prod (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
              (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)
              (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁))
            (@DomainTheory.NeighbourhoodSystems.funSpace α ? V₀ V₂)
            (@DomainTheory.NeighbourhoodSystems.compMap α β ? V₀ V₁ V₂)
            (@DomainTheory.NeighbourhoodSystems.pair (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
              (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)
              (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) Gφ Fφ)))
          x)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap β ? V₁ V₂
          (@DomainTheory.NeighbourhoodSystems.toApproxMap β ? V₁ V₂ Gφ)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α β V₀ V₁
            (@DomainTheory.NeighbourhoodSystems.toApproxMap α β V₀ V₁ Fφ) x)))
  @DomainTheory.NeighbourhoodSystems.toApproxMap_compMap @DomainTheory.
    NeighbourhoodSystems.toElementMap_compMap_apply
end
end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.24 Exercise 3.23 — cartesian closed category

(For category theorists.) Show that the results of 3.11 and 3.12 prove that the category of domains and approximable mappings is a *cartesian closed category*. (Mac Lane [1971] pp. 95–96 may be consulted for a very brief introduction.) What is the *terminal domain* in this category? What sort of functor is $(D_0 \to D_1)$?

Exercise_3_23.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_15
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Lemma_3_6
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
section
variable {α β ? : Type*} (V : NeighborhoodSystem α)
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

instance : Subsingleton (ApproximableMap V unitSys) :=
  ⟨fun _ _ => ext_of_toElementMap fun _ => Subsingleton.elim _ _⟩

instance : Unique (ApproximableMap V unitSys) where
  default := constMap V (default : unitSys.Element)
  uniq _ := Subsingleton.elim _ _

def homAdjunction (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    (V₂ : NeighborhoodSystem ?) :
    ApproximableMap (prod V₀ V₁) V₂ ≃o ApproximableMap V₀ (funSpace V₁ V₂) :=
  curryEquiv V₀ V₁ V₂

def toUnit : ApproximableMap V unitSys := default

theorem toUnit_unique (f : ApproximableMap V unitSys) : f = toUnit V := Subsingleton.
    elim _ _
end

section
set_option linter.unusedVariables false

theorem example_323.{u_1} : ∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α)
  (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α Unit V DomainTheory.
    NeighbourhoodSystems.unitSys),
  @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α Unit V DomainTheory.
    NeighbourhoodSystems.unitSys) f
    (@DomainTheory.NeighbourhoodSystems.toUnit α V) :=
  @DomainTheory.NeighbourhoodSystems.toUnit_unique
end
end
```

```
end DomainTheory.NeighbourhoodSystems
end
```

3.4.25 Exercise 3.24 — function-space isomorphisms

Establish some more isomorphisms :

(i) $(D_0 \to (D_1 \times D_2)) \cong (D_0 \to D_1) \times (D_0 \to D_2)$

(ii) $(D_0 \to D_1^\infty) \cong (D_0 \to D_1)^\infty$

(iii) $D_0 \times (D_1 + D_2) \cong (D_0 \times D_1) + (D_0 \times D_2)$

(iv) $(D_0 + D_1) \to D_2 \cong (D_0 \to D_2) \times (D_1 \to D_2) \ldots$

If some of the above are not true, perhaps at least some mapping relationships can be established.

Exercise_3_24.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_10
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_4
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_5
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_16
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_18
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_19
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_5
@[expose] public section

section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap

variable {α β ? : Type*}

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

def funProdEquiv (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    (V₂ : NeighborhoodSystem ?) :
    ApproximableMap V₀ (prod V₁ V₂) ≃o (ApproximableMap V₀ V₁ × ApproximableMap V₀ V₂)
    where
  toFun h := ((proj₀ V₁ V₂).comp h, (proj₁ V₁ V₂).comp h)
  invFun p := paired p.1 p.2
  left_inv h := paired_proj h
  right_inv p := by
    ext1
    · exact proj₀_comp_paired p.1 p.2
```

```
    · exact proj₁_comp_paired p.1 p.2
  map_rel_iff' := by
    intro h h'
    constructor
    · rintro ⟨h0, h1⟩
      rw [← paired_proj h, ← paired_proj h']
      intro Z P hrel
      obtain ⟨hP, hfP, hgP⟩ := hrel
      exact ⟨hP, h0 _ _ hfP, h1 _ _ hgP⟩
    · intro hle
      refine ⟨fun X Y hrel => ?_, fun X Y hrel => ?_⟩
      · obtain ⟨W, hW, hYW⟩ := hrel
        exact ⟨W, hle X W hW, hYW⟩
      · obtain ⟨W, hW, hYW⟩ := hrel
        exact ⟨W, hle X W hW, hYW⟩

end DomainTheory.NeighbourhoodSystems
end

section
namespace DomainTheory.NeighbourhoodSystems
section

open NeighborhoodSystem ApproximableMap

section
variable {α β ? : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}

def funProdIso (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    (V₂ : NeighborhoodSystem ?) :
    (funSpace V₀ (prod V₁ V₂)).Element ≃o (prod (funSpace V₀ V₁) (funSpace V₀ V₂)).
    Element :=
  (funSpaceEquiv V₀ (prod V₁ V₂)).trans <|
    (funProdEquiv V₀ V₁ V₂).trans <|
      (prodCongrOrderIso (funSpaceEquiv V₀ V₁).symm (funSpaceEquiv V₀ V₂).symm).trans
        (prodEquiv (funSpace V₀ V₁) (funSpace V₀ V₂)).symm

theorem funProd_isomorphic :
    funSpace V₀ (prod V₁ V₂) ≅? prod (funSpace V₀ V₁) (funSpace V₀ V₂) :=
  ⟨funProdIso V₀ V₁ V₂⟩
end

section
set_option linter.unusedVariables false

theorem example_324.{u_1, u_2, u_3} : ∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {
    V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?},
  @DomainTheory.NeighbourhoodSystems.Isomorphic
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap α (Sum β ?) V₀
      (@DomainTheory.NeighbourhoodSystems.prod β ? V₁ V₂))
    (Sum (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂))
```

```
    (@DomainTheory.NeighbourhoodSystems.funSpace α (Sum β ?) V₀ (@DomainTheory.
    NeighbourhoodSystems.prod β ? V₁ V₂))
    (@DomainTheory.NeighbourhoodSystems.prod (@DomainTheory.NeighbourhoodSystems.
    ApproximableMap α β V₀ V₁)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
      (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) (@DomainTheory.
    NeighbourhoodSystems.funSpace α ? V₀ V₂)) :=
  @DomainTheory.NeighbourhoodSystems.funProd_isomorphic
end

section
variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

theorem exists_forall_swap {x : V₀.Element} {W : Set (ℕ × β)}
    {g : ℕ → ApproximableMap V₀ V₁} (hW : (iterSys V₁).mem W) :
    (∃ X, x.mem X ∧ ∀ i, (g i).rel X (fiber W i)) ↔
      (∀ i, ∃ X, x.mem X ∧ (g i).rel X (fiber W i)) := by
  constructor
  · rintro ⟨X, hXx, hall⟩ i; exact ⟨X, hXx, hall i⟩
  · intro hall
    obtain ⟨N, hN⟩ := hW.2
    choose Xs hXx hXrel using hall
    have hbase : x.mem (V₀.interUpTo Xs N) := x.mem_interUpTo Xs (n := N) (fun i _ =>
    hXx i)
    refine ⟨V₀.interUpTo Xs N, hbase, fun i => ?_⟩
    by_cases h : i < N
    · exact (g i).mono (hXrel i) (V₀.interUpTo_subset Xs h) subset_rfl (x.sub hbase)
        ((g i).rel_cod (hXrel i))
    · rw [hN i (not_lt.mp h)]; exact (g i).rel_master (x.sub hbase)

theorem le_of_projComp_le {f f' : ApproximableMap V₀ (iterSys V₁)}
    (h : ∀ n, (projN V₁ n).comp f ≤ (projN V₁ n).comp f') : f ≤ f' := by
  rw [le_iff_toElementMap_le]
  intro x
  apply le_of_component_le
  intro n
  have hx := (le_iff_toElementMap_le.mp (h n)) x
  rwa [toElementMap_comp, toElementMap_comp, toElementMap_projN, toElementMap_projN]
    at hx

def mapOfSeq (g : ℕ → ApproximableMap V₀ V₁) : ApproximableMap V₀ (iterSys V₁) where
  rel X W := V₀.mem X ∧ (iterSys V₁).mem W ∧ ∀ i, (g i).rel X (fiber W i)
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨V₀.master_mem, (iterSys V₁).master_mem, fun i => by
    rw [fiber_iterSys_master]; exact (g i).master_rel⟩
  inter_right := by
    rintro X W W' ⟨hX, hW, hrel⟩ ⟨_, hW', hrel'⟩
    refine ⟨hX, ⟨fun i => (g i).rel_cod ((g i).inter_right (hrel i) (hrel' i)), ?_⟩,
      fun i => (g i).inter_right (hrel i) (hrel' i)⟩
    obtain ⟨NW, hNW⟩ := hW.2
    obtain ⟨NW', hNW'⟩ := hW'.2
    refine ⟨max NW NW', fun i hi => ?_⟩
    rw [fiber_inter, hNW i (le_trans (le_max_left _ _) hi),
      hNW' i (le_trans (le_max_right _ _) hi), Set.inter_self]
  mono := by
```

```
    rintro X X' W W' ⟨_, _, hrel⟩ hX'X hWW' hX' hW'
    exact ⟨hX', hW', fun i => (g i).mono (hrel i) hX'X (fiber_mono hWW' i) hX' (hW'.1 i
    )⟩

def piCongrOrderIso {ι : Type*} {A B : ι → Type*} [∀ i, Preorder (A i)] [∀ i, Preorder
    (B i)]
    (e : ∀ i, A i ≃o B i) : (∀ i, A i) ≃o (∀ i, B i) where
  toFun f := fun i => e i (f i)
  invFun g := fun i => (e i).symm (g i)
  left_inv f := by funext i; simp
  right_inv g := by funext i; simp
  map_rel_iff' := by
    intro f g
    exact ⟨fun h i => (e i).le_iff_le.mp (h i), fun h i => (e i).le_iff_le.mpr (h i)⟩

theorem projComp_mono {f f' : ApproximableMap V₀ (iterSys V₁)} (h : f ≤ f') (n : ℕ) :
    (projN V₁ n).comp f ≤ (projN V₁ n).comp f' := by
  rintro X Y ⟨W, hfXW, hWY⟩
  exact ⟨W, h X W hfXW, hWY⟩

theorem toElementMap_mapOfSeq (g : ℕ → ApproximableMap V₀ V₁) (x : V₀.Element) :
    (mapOfSeq g).toElementMap x = ofSeq (fun i => (g i).toElementMap x) := by
  apply Element.ext
  intro W
  constructor
  · rintro ⟨X, hXx, _, hW, hrel⟩
    exact ⟨hW, fun i => ⟨X, hXx, hrel i⟩⟩
  · rintro ⟨hW, hfib⟩
    obtain ⟨X, hXx, hrel⟩ := (exists_forall_swap hW).mpr (fun i => hfib i)
    exact ⟨X, hXx, x.sub hXx, hW, hrel⟩

def funIterEquiv (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    ApproximableMap V₀ (iterSys V₁) ≃o (∀ _ : ℕ, ApproximableMap V₀ V₁) where
  toFun f := fun n => (projN V₁ n).comp f
  invFun g := mapOfSeq g
  left_inv f := by
    apply ext_of_toElementMap
    intro x
    rw [toElementMap_mapOfSeq]
    have hfun : (fun i => ((projN V₁ i).comp f).toElementMap x)
        = (fun i => component (f.toElementMap x) i) := by
      funext i; rw [toElementMap_comp, toElementMap_projN]
    rw [hfun, ofSeq_component]
  right_inv g := by
    funext n
    apply ext_of_toElementMap
    intro x
    rw [toElementMap_comp, toElementMap_mapOfSeq, toElementMap_projN, component_ofSeq]
  map_rel_iff' := by
    intro f f'
    constructor
    · intro h; exact le_of_projComp_le (fun n => h n)
    · intro h n; exact projComp_mono h n

def funIterIso (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    (funSpace V₀ (iterSys V₁)).Element ≃o (iterSys (funSpace V₀ V₁)).Element :=
```

```
  (funSpaceEquiv V₀ (iterSys V₁)).trans <|
    (funIterEquiv V₀ V₁).trans <|
      (piCongrOrderIso (fun _ : ℕ => (funSpaceEquiv V₀ V₁).symm)).trans
        (iterSeqEquiv (funSpace V₀ V₁)).symm

theorem funIter_isomorphic : funSpace V₀ (iterSys V₁) ≅? iterSys (funSpace V₀ V₁) :=
  ⟨funIterIso V₀ V₁⟩
end

section
set_option linter.unusedVariables false

theorem example_324_iter.{u_1, u_2} : ∀ {α : Type u_1} {β : Type u_2} {V₀ :
    DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
  @DomainTheory.NeighbourhoodSystems.Isomorphic
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap α (Prod Nat β) V₀
      (@DomainTheory.NeighbourhoodSystems.iterSys β V₁))
    (Prod Nat (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁))
    (@DomainTheory.NeighbourhoodSystems.funSpace α (Prod Nat β) V₀ (@DomainTheory.
    NeighbourhoodSystems.iterSys β V₁))
    (@DomainTheory.NeighbourhoodSystems.iterSys (@DomainTheory.NeighbourhoodSystems.
    ApproximableMap α β V₀ V₁)
      (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)) :=
  @DomainTheory.NeighbourhoodSystems.funIter_isomorphic
end

section
open NeighborhoodSystem ApproximableMap
variable {α β ? : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ :
    NeighborhoodSystem ?}
variable {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}

def copair (a : ApproximableMap V₀ V₂) (b : ApproximableMap V₁ V₂) :
    ApproximableMap (sum V₀ V₁ h₀ h₁) V₂ where
  rel W Z := (sum V₀ V₁ h₀ h₁).mem W ∧ V₂.mem Z ∧
    (Z = V₂.master ∨
      (∃ X, W = inj₀ X ∧ a.rel X Z) ∨
      (∃ Y, W = inj₁ Y ∧ b.rel Y Z))
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(sum V₀ V₁ h₀ h₁).master_mem, V₂.master_mem, Or.inl rfl⟩
  inter_right := by
    rintro W Z Z' ⟨hW, _, hd⟩ ⟨_, _, hd'⟩
    have hmem : ∀ Z'' : Set ?,
        (Z'' = V₂.master ∨ (∃ X, W = inj₀ X ∧ a.rel X Z'') ∨ (∃ Y, W = inj₁ Y ∧ b.rel Y
     Z'')) →
        V₂.mem Z'' := by
      rintro Z'' (rfl | ⟨_, _, hf⟩ | ⟨_, _, hg⟩)
      · exact V₂.master_mem
      · exact a.rel_cod hf
      · exact b.rel_cod hg
    have key : Z ∩ Z' = V₂.master ∨ (∃ X, W = inj₀ X ∧ a.rel X (Z ∩ Z')) ∨
        (∃ Y, W = inj₁ Y ∧ b.rel Y (Z ∩ Z')) := by
      rcases hd with rfl | ⟨X, hWX, hf⟩ | ⟨Y, hWY, hg⟩
```

```
      · rw [Set.inter_eq_right.mpr (V₂.sub_master (hmem _ hd'))]; exact hd'
      · rcases hd' with rfl | ⟨X', hWX', hf'⟩ | ⟨Y', hWY', hg'⟩
        · rw [Set.inter_eq_left.mpr (V₂.sub_master (a.rel_cod hf))]
          exact Or.inr (Or.inl ⟨X, hWX, hf⟩)
        · obtain rfl : X = X' := inj₀_injective (hWX ▶ hWX')
          exact Or.inr (Or.inl ⟨X, hWX, a.inter_right hf hf'⟩)
        · exact absurd (hWX ▶ hWY' : (inj₀ X : Set _) = inj₁ Y')
            (fun h => not_inj₀_subset_inj₁ (h₀ X (a.rel_dom hf)) h.subset)
      · rcases hd' with rfl | ⟨X', hWX', hf'⟩ | ⟨Y', hWY', hg'⟩
        · rw [Set.inter_eq_left.mpr (V₂.sub_master (b.rel_cod hg))]
          exact Or.inr (Or.inr ⟨Y, hWY, hg⟩)
        · exact absurd (hWY ▶ hWX' : (inj₁ Y : Set _) = inj₀ X')
            (fun h => not_inj₁_subset_inj₀ (h₁ Y (b.rel_dom hg)) h.subset)
        · obtain rfl : Y = Y' := inj₁_injective (hWY ▶ hWY')
          exact Or.inr (Or.inr ⟨Y, hWY, b.inter_right hg hg'⟩)
    exact ⟨hW, hmem _ key, key⟩
  mono := by
    rintro W W₂ Z Z' ⟨_, _, hd⟩ hW₂W hZZ' hW₂ hZ'
    refine ⟨hW₂, hZ', ?_⟩
    rcases hd with rfl | ⟨X, rfl, hf⟩ | ⟨Y, rfl, hg⟩
    · left; exact Set.Subset.antisymm (V₂.sub_master hZ') hZZ'
    · obtain ⟨X₂, hX₂, rfl⟩ := mem_subset_inj₀ hW₂ hW₂W
      exact Or.inr (Or.inl ⟨X₂, rfl, a.mono hf (inj₀_subset_inj₀.mp hW₂W) hZZ' hX₂ hZ'⟩)
    · obtain ⟨Y₂, hY₂, rfl⟩ := mem_subset_inj₁ hW₂ hW₂W
      exact Or.inr (Or.inr ⟨Y₂, rfl, b.mono hg (inj₁_subset_inj₁.mp hW₂W) hZZ' hY₂ hZ'⟩)

@[simp] theorem copair_rel {a : ApproximableMap V₀ V₂} {b : ApproximableMap V₁ V₂}
    {W : Set (Option (α ? β))} {Z : Set ?} :
    (copair (h₀ := h₀) (h₁ := h₁) a b).rel W Z ↔ (sum V₀ V₁ h₀ h₁).mem W ∧ V₂.mem Z ∧
      (Z = V₂.master ∨ (∃ X, W = inj₀ X ∧ a.rel X Z) ∨ (∃ Y, W = inj₁ Y ∧ b.rel Y Z))
    := Iff.rfl

def copairProj (h : ApproximableMap (sum V₀ V₁ h₀ h₁) V₂) :
    ApproximableMap V₀ V₂ × ApproximableMap V₁ V₂ :=
  (h.comp inMap₀, h.comp inMap₁)

theorem prod_mem_nonempty (hn₀ : ∀ X, V₀.mem X → X.Nonempty) (_hn₁ : ∀ Y, V₁.mem Y → Y
    .Nonempty)
    (W : Set (α ? β)) (hW : (prod V₀ V₁).mem W) : W.Nonempty := by
  obtain ⟨X, Y, hX, _, rfl⟩ := hW
  obtain ⟨a, ha⟩ := hn₀ X hX
  exact ⟨Sum.inl a, mem_prodNbhd_inl.mpr ha⟩

def distribMap (hn₀ : ∀ X, V₀.mem X → X.Nonempty) (hn₁ : ∀ Y, V₁.mem Y → Y.Nonempty)
    (hn₂ : ∀ Z, V₂.mem Z → Z.Nonempty) :
    ApproximableMap
      (sum (prod V₀ V₁) (prod V₀ V₂) (prod_mem_nonempty hn₀ hn₁) (prod_mem_nonempty hn₀
    hn₂))
      (prod V₀ (sum V₁ V₂ hn₁ hn₂)) :=
  copair
    (paired (proj₀ V₀ V₁) ((inMap₀ (h₀ := hn₁) (h₁ := hn₂)).comp (proj₁ V₀ V₁)))
    (paired (proj₀ V₀ V₂) ((inMap₁ (h₀ := hn₁) (h₁ := hn₂)).comp (proj₁ V₀ V₂)))

theorem copair_comp_inMap₀ (a : ApproximableMap V₀ V₂) (b : ApproximableMap V₁ V₂) :
    (copair (h₀ := h₀) (h₁ := h₁) a b).comp inMap₀ = a := by
  apply ApproximableMap.ext
```

```
  intro X Z
  constructor
  · rintro ⟨W, ⟨hX, _, hinj⟩, _, hZ, hd⟩
    rcases hd with rfl | ⟨X', hWX', hf⟩ | ⟨Y', hWY', hg⟩
    · exact a.rel_master hX
    · exact a.mono hf (inj₀_subset_inj₀.mp (hWX' ▸ hinj)) subset_rfl hX hZ
    · exact (not_inj₀_subset_inj₁ (h₀ X hX) (hWY' ▸ hinj)).elim
  · intro hf
    exact ⟨inj₀ X, ⟨a.rel_dom hf, Or.inr (Or.inl ⟨X, a.rel_dom hf, rfl⟩), subset_rfl⟩,
      Or.inr (Or.inl ⟨X, a.rel_dom hf, rfl⟩), a.rel_cod hf,
      Or.inr (Or.inl ⟨X, rfl, hf⟩)⟩

theorem copair_comp_inMap₁ (a : ApproximableMap V₀ V₂) (b : ApproximableMap V₁ V₂) :
    (copair (h₀ := h₀) (h₁ := h₁) a b).comp inMap₁ = b := by
  apply ApproximableMap.ext
  intro Y Z
  constructor
  · rintro ⟨W, ⟨hY, _, hinj⟩, _, hZ, hd⟩
    rcases hd with rfl | ⟨X', hWX', hf⟩ | ⟨Y', hWY', hg⟩
    · exact b.rel_master hY
    · exact (not_inj₁_subset_inj₀ (h₁ Y hY) (hWX' ▸ hinj)).elim
    · exact b.mono hg (inj₁_subset_inj₁.mp (hWY' ▸ hinj)) subset_rfl hY hZ
  · intro hg
    exact ⟨inj₁ Y, ⟨b.rel_dom hg, Or.inr (Or.inr ⟨Y, b.rel_dom hg, rfl⟩), subset_rfl⟩,
      Or.inr (Or.inr ⟨Y, b.rel_dom hg, rfl⟩), b.rel_cod hg,
      Or.inr (Or.inr ⟨Y, rfl, hg⟩)⟩

theorem copairProj_copair (a : ApproximableMap V₀ V₂) (b : ApproximableMap V₁ V₂) :
    copairProj (h₀ := h₀) (h₁ := h₁) (copair a b) = (a, b) := by
  show ((copair (h₀ := h₀) (h₁ := h₁) a b).comp inMap₀,
        (copair (h₀ := h₀) (h₁ := h₁) a b).comp inMap₁) = (a, b)
  rw [copair_comp_inMap₀, copair_comp_inMap₁]
end

section
set_option linter.unusedVariables false

theorem example_324_distrib.{u_1, u_2, u_3} : And
  (And
    (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
   NeighbourhoodSystems.NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
      {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
   V₀ X → @Set.Nonempty α X}
      {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
   V₁ Y → @Set.Nonempty β Y}
      (a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
      (b : @DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂),
      @Eq
        (Prod (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂))
        (@DomainTheory.NeighbourhoodSystems.copairProj α β ? V₀ V₁ V₂ h₀ h₁
          (@DomainTheory.NeighbourhoodSystems.copair α β ? V₀ V₁ V₂ h₀ h₁ a b))
        (@Prod.mk (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) a b))
```

```
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
 NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
    {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
 V₀ X → @Set.Nonempty α X}
    {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
 V₁ Y → @Set.Nonempty β Y}
    (a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
    (b : @DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂),
    @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α (Option (Sum α β))
 ? V₀
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₂
        (@DomainTheory.NeighbourhoodSystems.copair α β ? V₀ V₁ V₂ h₀ h₁ a b)
        (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁))
      a))
(∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
 NeighbourhoodSystems.NeighborhoodSystem α}
 {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
 {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
 {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
  X → @Set.Nonempty α X}
 {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
  Y → @Set.Nonempty β Y}
 (a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
 (b : @DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂),
 @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
   (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp β (Option (Sum α β)) ?
 V₁
     (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₂
     (@DomainTheory.NeighbourhoodSystems.copair α β ? V₀ V₁ V₂ h₀ h₁ a b)
     (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁))
   b) :=
@And.intro
(And
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
 NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
    {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
 V₀ X → @Set.Nonempty α X}
    {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
 V₁ Y → @Set.Nonempty β Y}
    (a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
    (b : @DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂),
    @Eq
      (Prod (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂))
      (@DomainTheory.NeighbourhoodSystems.copairProj α β ? V₀ V₁ V₂ h₀ h₁
        (@DomainTheory.NeighbourhoodSystems.copair α β ? V₀ V₁ V₂ h₀ h₁ a b))
      (@Prod.mk (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) a b))
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
 NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
```

```
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
    {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
  V₀ X → @Set.Nonempty α X}
    {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
  V₁ Y → @Set.Nonempty β Y}
    (a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
    (b : @DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂),
    @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α (Option (Sum α β))
  ? V₀
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₂
        (@DomainTheory.NeighbourhoodSystems.copair α β ? V₀ V₁ V₂ h₀ h₁ a b)


        (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁))
      a))
(∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
  NeighbourhoodSystems.NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
  {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
   X → @Set.Nonempty α X}
  {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
   Y → @Set.Nonempty β Y}
  (a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
  (b : @DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂),
  @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp β (Option (Sum α β)) ?
  V₁
      (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₂
      (@DomainTheory.NeighbourhoodSystems.copair α β ? V₀ V₁ V₂ h₀ h₁ a b)
      (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁))
    b)
(@And.intro
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
  NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
    {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
  V₀ X → @Set.Nonempty α X}
    {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
  V₁ Y → @Set.Nonempty β Y}
    (a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
    (b : @DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂),
    @Eq
      (Prod (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂))
      (@DomainTheory.NeighbourhoodSystems.copairProj α β ? V₀ V₁ V₂ h₀ h₁
        (@DomainTheory.NeighbourhoodSystems.copair α β ? V₀ V₁ V₂ h₀ h₁ a b))
      (@Prod.mk (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) a b))
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
  NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
    {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
  V₀ X → @Set.Nonempty α X}
```

```
      {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
    V₁ Y → @Set.Nonempty β Y}
      (a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
      (b : @DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂),
      @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α ? V₀ V₂)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α (Option (Sum α β))
    ? V₀
          (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₂
          (@DomainTheory.NeighbourhoodSystems.copair α β ? V₀ V₁ V₂ h₀ h₁ a b)
          (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁))
        a)
    @DomainTheory.NeighbourhoodSystems.copairProj_copair @DomainTheory.
    NeighbourhoodSystems.copair_comp_inMap₀)
  @DomainTheory.NeighbourhoodSystems.copair_comp_inMap₁
end

end
end DomainTheory.NeighbourhoodSystems
end
```

3.4.26 Exercise 3.25 — opens form a domain

(For topologists.) Recall from Exercises 1.21 and 2.13 on how to regard a domain $|D|$ as a topological space. Using 3.10 show that the family of open subsets of $|D|$ is isomorphic to a domain.

Exercise_3_25.lean

```
module
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_20
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems.Exercise325
section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem Set

def sierpinski : NeighborhoodSystem Unit where
  mem N := N = Set.univ ∨ N = ∅
  master := Set.univ
  master_nonempty := ⟨(), Set.mem_univ _⟩
  master_mem := Or.inl rfl
  inter_mem := by
    intro X Y Z hX hY hZ _
    rcases hX with rfl | rfl
    · rcases hY with rfl | rfl
      · left; rw [Set.univ_inter]
      · right; rw [Set.univ_inter]
    · right; rw [Set.empty_inter]
  sub_master := fun _ => Set.subset_univ _

section
variable {α : Type*} (V : NeighborhoodSystem α)
```

```
def mapOfOpen (U : Set V.Element) : ApproximableMap V sierpinski where
  rel X Y := V.mem X ∧ (Y = Set.univ ∨ (Y = ∅ ∧ V.basicOpen X ⊆ U))
  rel_dom h := h.1
  rel_cod h := by
    rcases h.2 with rfl | ⟨rfl, _⟩
    · exact Or.inl rfl
    · exact Or.inr rfl
  master_rel := ⟨V.master_mem, Or.inl rfl⟩
  inter_right := by
    rintro X Y Y' ⟨hX, hY⟩ ⟨_, hY'⟩
    refine ⟨hX, ?_⟩
    rcases hY with rfl | ⟨rfl, hsub⟩
    · rcases hY' with rfl | ⟨rfl, hsub'⟩
      · left; rw [Set.univ_inter]
      · right; rw [Set.univ_inter]; exact ⟨rfl, hsub'⟩
    · rcases hY' with rfl | ⟨rfl, _⟩
      · right; rw [Set.inter_univ]; exact ⟨rfl, hsub⟩
      · right; rw [Set.inter_self]; exact ⟨rfl, hsub⟩
  mono := by
    rintro X X' Y Y' ⟨hX, hY⟩ hX'X hYY' hX' hY'
    refine ⟨hX', ?_⟩
    rcases hY' with rfl | rfl
    · left; rfl
    · right
      refine ⟨rfl, ?_⟩
      rcases hY with rfl | ⟨rfl, hsub⟩
      · exact absurd (hYY' (Set.mem_univ ())) (by simp)
      · have hbo : V.basicOpen X' ⊆ V.basicOpen X := fun z hz => z.up_mem hz hX hX'X
        exact subset_trans hbo hsub

@[simp] theorem mapOfOpen_rel (U : Set V.Element) (X : Set α) (Y : Set Unit) :
    (mapOfOpen V U).rel X Y ↔ V.mem X ∧ (Y = Set.univ ∨ (Y = ∅ ∧ V.basicOpen X ⊆ U))
    := Iff.rfl

theorem mapOfOpen_rel_empty (U : Set V.Element) (X : Set α) :
    (mapOfOpen V U).rel X ∅ ↔ V.mem X ∧ V.basicOpen X ⊆ U := by
  rw [mapOfOpen_rel]
  constructor
  · rintro ⟨hX, h⟩
    refine ⟨hX, ?_⟩
    rcases h with h | ⟨_, h⟩
    · exact absurd h Set.empty_ne_univ
    · exact h
  · rintro ⟨hX, h⟩
    exact ⟨hX, Or.inr ⟨rfl, h⟩⟩

def openOfMap (f : ApproximableMap V sierpinski) : Set V.Element :=
  {x | ∃ X, x.mem X ∧ f.rel X ∅}

theorem openOfMap_isOpen (f : ApproximableMap V sierpinski) : IsOpen (openOfMap V f)
    := by
  constructor
  intro x hx
  obtain ⟨X, hxX, hf⟩ := hx
  exact ⟨X, hxX, fun z hz => ⟨X, hz, hf⟩⟩
```

```
end

section
set_option linter.unusedVariables false

theorem example_325.{u_1} : ∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α)
  (f :
    @DomainTheory.NeighbourhoodSystems.ApproximableMap α Unit V
      DomainTheory.NeighbourhoodSystems.Exercise325.sierpinski),
  @IsOpen (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.instTopologicalSpaceElement
     α V)
    (@DomainTheory.NeighbourhoodSystems.Exercise325.openOfMap α V f) :=
  @DomainTheory.NeighbourhoodSystems.Exercise325.openOfMap_isOpen
end

section
variable {α : Type*} (V : NeighborhoodSystem α)

def openIso (V : NeighborhoodSystem α) :
    {U : Set V.Element // IsOpen U} ≃o ApproximableMap V sierpinski where
  toFun U := mapOfOpen V U.1
  invFun f := ⟨openOfMap V f, openOfMap_isOpen V f⟩
  left_inv U := by
    apply Subtype.ext
    ext x
    constructor
    · rintro ⟨X, hxX, hrel⟩
      rw [mapOfOpen_rel_empty] at hrel
      exact hrel.2 hxX
    · intro hx
      obtain ⟨X, hxX, hsub⟩ := U.2.out x hx
      exact ⟨X, hxX, (mapOfOpen_rel_empty V U.1 X).mpr ⟨x.sub hxX, hsub⟩⟩
  right_inv f := by
    apply ApproximableMap.ext
    intro X Y
    rw [mapOfOpen_rel]
    constructor
    · rintro ⟨hX, hd⟩
      rcases hd with rfl | ⟨rfl, hsub⟩
      · exact f.mono f.master_rel (V.sub_master hX) (Set.subset_univ _) hX (Or.inl rfl)
      · have hpr : V.principal hX ∈ V.basicOpen X := ⟨hX, subset_rfl⟩
        obtain ⟨X', hX', hf⟩ := hsub hpr
        exact f.mono hf hX'.2 subset_rfl hX (Or.inr rfl)
    · intro hf
      refine ⟨f.rel_dom hf, ?_⟩
      rcases f.rel_cod hf with rfl | rfl
      · left; rfl
      · exact Or.inr ⟨rfl, fun z hz => ⟨X, hz, hf⟩⟩
  map_rel_iff' := by
    intro a b
    show mapOfOpen V a.1 ≤ mapOfOpen V b.1 ↔ a ≤ b
    rw [ApproximableMap.le_iff]
    constructor
```

```
    · intro h x hx
      obtain ⟨X, hxX, hsub⟩ := a.2.out x hx
      have hrelB := h X ∅ ((mapOfOpen_rel_empty V a.1 X).mpr ⟨x.sub hxX, hsub⟩)
      rw [mapOfOpen_rel_empty] at hrelB
      exact hrelB.2 hxX
    · intro h X Y hrel
      rw [mapOfOpen_rel] at hrel ⊢
      obtain ⟨hX, hd⟩ := hrel
      refine ⟨hX, ?_⟩
      rcases hd with hu | ⟨he, hsub⟩
      · exact Or.inl hu
      · exact Or.inr ⟨he, fun z hz => h (hsub hz)⟩

def opensReprIso (V : NeighborhoodSystem α) :
    {U : Set V.Element // IsOpen U} ≃o (funSpace V sierpinski).Element :=
  (openIso V).trans (funSpaceEquiv V sierpinski).symm
end
end

end DomainTheory.NeighbourhoodSystems.Exercise325
end
```

3.4.27 Exercise 3.26 — conditional combinator

Show that for every domain D there is an approximable mapping

$$\mathrm{cond} : T \times D \times D \to D,$$

called the *conditional operator*, satisfying

(i) $\mathrm{cond}(\mathrm{true}, x, y) = x$

(ii) $\mathrm{cond}(\mathrm{false}, x, y) = y$

(iii) $\mathrm{cond}(\bot, x, y) = \bot$.

(Hint: Recalling that $T = \{\{0\}, \{1\}, \{0, 1\}\}$, define cond as a relation by

$$\begin{aligned} 0C \cup 10X \cup 110Y \ \mathrm{cond}\ Z \quad \text{iff} \quad & 0 \in C \text{ and } X \subseteq Z \text{ or} \\ & 1 \in C \text{ and } Y \subseteq Z \text{ or} \\ & 0, 1 \in C \text{ and } \Delta \subseteq Z, \end{aligned}$$

where $C \in T$ and $X \in D$ and $Y \in D$ and where we are using the construction of Exercise 3.14.) Find a similar operator in the domain

$$T \times D_0 \times D_1 \to D_0 + D_1.$$

Show also there is an approximable mapping

$$\mathrm{which} : D_0 + D_1 \to T$$

such that for all $x \in |D_0 + D_1|$

$$\mathrm{cond}(\mathrm{which}(x), \mathrm{in}_0(\mathrm{out}_0(x)), \mathrm{in}_1(\mathrm{out}_1(x))) = x.$$

Exercise_3_26.lean

```
module
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_18
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_19
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Definition_3_3
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_4
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Example_2_3
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise326
section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap

section
variable {α : Type*}

abbrev TD : NeighborhoodSystem Example12.Token := Example12.neighborhoodSystem

theorem Tmem_eq_one {C : Set Example12.Token} (hC : Example12.mem C) (h : C ⊆
    Example12.one) :
    C = Example12.one := by
  rcases (Example12.mem_iff C).mp hC with rfl | rfl | rfl
  · exact absurd (h (Set.mem_univ 0)) (by simp [Example12.one])
  · exact absurd (h (by simp [Example12.zero] : (0 : Example12.Token) ∈ Example12.zero)
    )
      (by simp [Example12.one])
  · rfl

theorem Tmem_eq_zero {C : Set Example12.Token} (hC : Example12.mem C) (h : C ⊆
    Example12.zero) :
    C = Example12.zero := by
  rcases (Example12.mem_iff C).mp hC with rfl | rfl | rfl
  · exact absurd (h (Set.mem_univ 1)) (by simp [Example12.zero])
  · rfl
  · exact absurd (h (by simp [Example12.one] : (1 : Example12.Token) ∈ Example12.one))
      (by simp [Example12.zero])

def condGuard (V : NeighborhoodSystem α) (W : Set (Example12.Token ? (α ? α))) (Z :
    Set α) : Prop :=
  (Sum.inl ^-1' W = Example12.zero ∧ Sum.inl ^-1' (Sum.inr ^-1' W) ⊆ Z) ∨
  (Sum.inl ^-1' W = Example12.one ∧ Sum.inr ^-1' (Sum.inr ^-1' W) ⊆ Z) ∨
  (Sum.inl ^-1' W = Example12.master ∧ V.master ⊆ Z)
end

section
variable {α : Type*}
variable (V : NeighborhoodSystem α)

theorem cond_components {W : Set (Example12.Token ? (α ? α))}
    (hW : (prod TD (prod V V)).mem W) :
```

```
    Example12.mem (Sum.inl ^-1' W) ∧
      V.mem (Sum.inl ^-1' (Sum.inr ^-1' W)) ∧ V.mem (Sum.inr ^-1' (Sum.inr ^-1' W)) :=
     by
  obtain ⟨C, P, hC, hP, rfl⟩ := hW
  obtain ⟨X, Y, hX, hY, rfl⟩ := hP
  simp only [inl_preimage_prodNbhd, inr_preimage_prodNbhd]
  exact ⟨hC, hX, hY⟩
end

section
variable {α : Type*}

theorem one_ne_master : (Example12.one : Set Example12.Token) = Example12.master := by
  intro h
  have h0 := Set.ext_iff.mp h 0
  simp [Example12.one, Example12.master] at h0

theorem zero_ne_master : (Example12.zero : Set Example12.Token) = Example12.master :=
    by
  intro h
  have h1 := Set.ext_iff.mp h 1
  simp [Example12.zero, Example12.master] at h1
end

section
variable {α : Type*}
variable (V : NeighborhoodSystem α)

theorem condGuard_master {W : Set (Example12.Token ? (α ? α))} {Z : Set α} (hg :
    condGuard V W Z)
    (hC : Sum.inl ^-1' W = Example12.master) : V.master ⊆ Z := by
  rcases hg with ⟨hC', _⟩ | ⟨hC', _⟩ | ⟨_, h⟩
  · exact absurd (hC.symm.trans hC') zero_ne_master.symm
  · exact absurd (hC.symm.trans hC') one_ne_master.symm
  · exact h
end

section
variable {α : Type*}

theorem zero_ne_one : (Example12.zero : Set Example12.Token) = Example12.one := by
  intro h
  have h0 := Set.ext_iff.mp h 0
  simp [Example12.zero, Example12.one] at h0
end

section
variable {α : Type*}
variable (V : NeighborhoodSystem α)

theorem condGuard_one {W : Set (Example12.Token ? (α ? α))} {Z : Set α} (hg :
    condGuard V W Z)
    (hC : Sum.inl ^-1' W = Example12.one) : Sum.inr ^-1' (Sum.inr ^-1' W) ⊆ Z := by
  rcases hg with ⟨hC', _⟩ | ⟨_, h⟩ | ⟨hC', _⟩
  · exact absurd (hC.symm.trans hC') zero_ne_one.symm
  · exact h
```

```
  · exact absurd (hC.symm.trans hC') one_ne_master

theorem condGuard_zero {W : Set (Example12.Token ? (α ? α))} {Z : Set α} (hg :
    condGuard V W Z)
    (hC : Sum.inl ^-1' W = Example12.zero) : Sum.inl ^-1' (Sum.inr ^-1' W) ⊆ Z := by
  rcases hg with ⟨_, h⟩ | ⟨hC', _⟩ | ⟨hC', _⟩
  · exact h
  · exact absurd (hC.symm.trans hC') zero_ne_one
  · exact absurd (hC.symm.trans hC') zero_ne_master

def cond (V : NeighborhoodSystem α) : ApproximableMap (prod TD (prod V V)) V where
  rel W Z := (prod TD (prod V V)).mem W ∧ V.mem Z ∧ condGuard V W Z
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := by
    refine ⟨(prod TD (prod V V)).master_mem, V.master_mem, Or.inr (Or.inr ⟨?_,
    subset_rfl⟩)⟩
    show Sum.inl ^-1' (prod TD (prod V V)).master = Example12.master
    rw [prod_master, inl_preimage_prodNbhd]; rfl
  inter_right := by
    rintro W Z Z' ⟨hW, hZ, hg⟩ ⟨_, hZ', hg'⟩
    obtain ⟨_, hX, hY⟩ := cond_components V hW
    refine ⟨hW, ?_, ?_⟩
    · rcases hg with ⟨hCz, hXZ⟩ | ⟨hCo, hYZ⟩ | ⟨hCm, hmZ⟩
      · exact V.inter_mem hZ hZ' hX (Set.subset_inter hXZ (condGuard_zero V hg' hCz))
      · exact V.inter_mem hZ hZ' hY (Set.subset_inter hYZ (condGuard_one V hg' hCo))
      · exact V.inter_mem hZ hZ' V.master_mem (Set.subset_inter hmZ (condGuard_master V
     hg' hCm))
    · rcases hg with ⟨hCz, hXZ⟩ | ⟨hCo, hYZ⟩ | ⟨hCm, hmZ⟩
      · exact Or.inl ⟨hCz, Set.subset_inter hXZ (condGuard_zero V hg' hCz)⟩
      · exact Or.inr (Or.inl ⟨hCo, Set.subset_inter hYZ (condGuard_one V hg' hCo)⟩)
      · exact Or.inr (Or.inr ⟨hCm, Set.subset_inter hmZ (condGuard_master V hg' hCm)⟩)
  mono := by
    rintro W W₂ Z Z₂ ⟨hW, hZ, hg⟩ hW₂W hZZ₂ hW₂ hZ₂
    obtain ⟨hC₂, hX₂, hY₂⟩ := cond_components V hW₂
    refine ⟨hW₂, hZ₂, ?_⟩
    have hCsub : Sum.inl ^-1' W₂ ⊆ Sum.inl ^-1' W := Set.preimage_mono hW₂W
    have hXsub : Sum.inl ^-1' (Sum.inr ^-1' W₂) ⊆ Sum.inl ^-1' (Sum.inr ^-1' W) :=
      Set.preimage_mono (Set.preimage_mono hW₂W)
    have hYsub : Sum.inr ^-1' (Sum.inr ^-1' W₂) ⊆ Sum.inr ^-1' (Sum.inr ^-1' W) :=
      Set.preimage_mono (Set.preimage_mono hW₂W)
    rcases hg with ⟨hCz, hXZ⟩ | ⟨hCo, hYZ⟩ | ⟨hCm, hmZ⟩
    · exact Or.inl ⟨Tmem_eq_zero hC₂ (hCsub.trans hCz.subset), (hXsub.trans hXZ).trans
    hZZ₂⟩
    · exact Or.inr (Or.inl ⟨Tmem_eq_one hC₂ (hCsub.trans hCo.subset),
        (hYsub.trans hYZ).trans hZZ₂⟩)
    · have hmZ₂ : V.master ⊆ Z₂ := hmZ.trans hZZ₂
      rcases (Example12.mem_iff (Sum.inl ^-1' W₂)).mp hC₂ with hC₂m | hC₂z | hC₂o
      · exact Or.inr (Or.inr ⟨hC₂m, hmZ₂⟩)
      · exact Or.inl ⟨hC₂z, (V.sub_master hX₂).trans hmZ₂⟩
      · exact Or.inr (Or.inl ⟨hC₂o, (V.sub_master hY₂).trans hmZ₂⟩)

@[simp] theorem cond_rel {W : Set (Example12.Token ? (α ? α))} {Z : Set α} :
    (cond V).rel W Z ↔ (prod TD (prod V V)).mem W ∧ V.mem Z ∧ condGuard V W Z := Iff.
    rfl
```

```
theorem cond_bot (x y : V.Element) :
    (cond V).toElementMap (pair Example23.botElt (pair x y)) = V.bot := by
  apply Element.ext
  intro Z
  constructor
  · rintro ⟨W, hWmem, _, hZ, hg⟩
    obtain ⟨C, P, hCbot, hPmem, rfl⟩ := hWmem
    obtain ⟨X, Y, hXx, hYy, rfl⟩ := hPmem
    simp only [condGuard, inl_preimage_prodNbhd, inr_preimage_prodNbhd] at hg
    have hCm : C = Example12.master := hCbot
    rcases hg with ⟨hCz, _⟩ | ⟨hCo, _⟩ | ⟨_, hmZ⟩
    · exact absurd (hCm.symm.trans hCz) zero_ne_master.symm
    · exact absurd (hCm.symm.trans hCo) one_ne_master.symm
    · rw [mem_bot, Set.Subset.antisymm (V.sub_master hZ) hmZ]
  · intro hbZ
    rw [mem_bot] at hbZ
    subst hbZ
    refine ⟨prodNbhd Example12.master (prodNbhd V.master V.master),
      ⟨Example12.master, prodNbhd V.master V.master, rfl,
        ⟨V.master, V.master, x.master_mem, y.master_mem, rfl⟩, rfl⟩,
      prod_mem_prodNbhd Example12.mem_master (prod_mem_prodNbhd V.master_mem V.
    master_mem),
      V.master_mem, ?_⟩
    exact Or.inr (Or.inr ⟨inl_preimage_prodNbhd _ _, subset_rfl⟩)

theorem cond_false (x y : V.Element) :
    (cond V).toElementMap (pair Example23.falseElt (pair x y)) = y := by
  apply Element.ext
  intro Z
  constructor
  · rintro ⟨W, hWmem, _, hZ, hg⟩
    obtain ⟨C, P, hCfalse, hPmem, rfl⟩ := hWmem
    obtain ⟨X, Y, hXx, hYy, rfl⟩ := hPmem
    simp only [condGuard, inl_preimage_prodNbhd, inr_preimage_prodNbhd] at hg
    rcases hg with ⟨hCz, _⟩ | ⟨_, hYZ⟩ | ⟨_, hmZ⟩
    · rcases hCfalse with hCm | hCo
      · exact absurd (hCm.symm.trans hCz) zero_ne_master.symm
      · exact absurd (hCo.symm.trans hCz) zero_ne_one.symm
    · exact y.up_mem hYy hZ hYZ
    · rw [Set.Subset.antisymm (V.sub_master hZ) hmZ]; exact y.master_mem
  · intro hyZ
    have hZ : V.mem Z := y.sub hyZ
    refine ⟨prodNbhd Example12.one (prodNbhd V.master Z), ⟨Example12.one, prodNbhd V.
    master Z,
      Or.inr rfl, ⟨V.master, Z, x.master_mem, hyZ, rfl⟩, rfl⟩,
      prod_mem_prodNbhd Example12.mem_one (prod_mem_prodNbhd V.master_mem hZ), hZ, ?_⟩
    refine Or.inr (Or.inl ⟨inl_preimage_prodNbhd _ _, ?_⟩)
    rw [inr_preimage_prodNbhd, inr_preimage_prodNbhd]

theorem cond_toElementMap_mem (t : TD.Element) (x y : V.Element) {Z : Set α} :
    ((cond V).toElementMap (pair t (pair x y))).mem Z ↔
      (t.mem Example12.zero ∧ x.mem Z) ∨ (t.mem Example12.one ∧ y.mem Z) ∨ Z = V.
    master := by
  constructor
  · rintro ⟨W, hWmem, _, hZ, hg⟩
    obtain ⟨C, P, hCt, hPmem, rfl⟩ := hWmem
```

```
    obtain ⟨X, Y, hXx, hYy, rfl⟩ := hPmem
    simp only [condGuard, inl_preimage_prodNbhd, inr_preimage_prodNbhd] at hg
    rcases hg with ⟨hCz, hXZ⟩ | ⟨hCo, hYZ⟩ | ⟨_, hmZ⟩
    · exact Or.inl ⟨hCz ▸ hCt, x.up_mem hXx hZ hXZ⟩
    · exact Or.inr (Or.inl ⟨hCo ▸ hCt, y.up_mem hYy hZ hYZ⟩)
    · exact Or.inr (Or.inr (Set.Subset.antisymm (V.sub_master hZ) hmZ))
  · intro h
    rcases h with ⟨ht0, hxZ⟩ | ⟨ht1, hyZ⟩ | rfl
    · have hZ : V.mem Z := x.sub hxZ
      refine ⟨prodNbhd Example12.zero (prodNbhd Z V.master), ⟨Example12.zero, prodNbhd
    Z V.master,
        ht0, ⟨Z, V.master, hxZ, y.master_mem, rfl⟩, rfl⟩,
        prod_mem_prodNbhd Example12.mem_zero (prod_mem_prodNbhd hZ V.master_mem), hZ,
    ?_⟩
      refine Or.inl ⟨inl_preimage_prodNbhd _ _, ?_⟩
      rw [inr_preimage_prodNbhd, inl_preimage_prodNbhd]
    · have hZ : V.mem Z := y.sub hyZ
      refine ⟨prodNbhd Example12.one (prodNbhd V.master Z), ⟨Example12.one, prodNbhd V.
    master Z,
        ht1, ⟨V.master, Z, x.master_mem, hyZ, rfl⟩, rfl⟩,
        prod_mem_prodNbhd Example12.mem_one (prod_mem_prodNbhd V.master_mem hZ), hZ, ?
    _⟩
      refine Or.inr (Or.inl ⟨inl_preimage_prodNbhd _ _, ?_⟩)
      rw [inr_preimage_prodNbhd, inr_preimage_prodNbhd]
    · refine ⟨prodNbhd Example12.master (prodNbhd V.master V.master),
        ⟨Example12.master, prodNbhd V.master V.master, t.master_mem,
          ⟨V.master, V.master, x.master_mem, y.master_mem, rfl⟩, rfl⟩,
        prod_mem_prodNbhd Example12.mem_master (prod_mem_prodNbhd V.master_mem V.
    master_mem),
        V.master_mem, ?_⟩
      exact Or.inr (Or.inr ⟨inl_preimage_prodNbhd _ _, subset_rfl⟩)

theorem cond_true (x y : V.Element) :
    (cond V).toElementMap (pair Example23.trueElt (pair x y)) = x := by
  apply Element.ext
  intro Z
  constructor
  · rintro ⟨W, hWmem, _, hZ, hg⟩
    obtain ⟨C, P, hCtrue, hPmem, rfl⟩ := hWmem
    obtain ⟨X, Y, hXx, hYy, rfl⟩ := hPmem
    simp only [condGuard, inl_preimage_prodNbhd, inr_preimage_prodNbhd] at hg
    rcases hg with ⟨_, hXZ⟩ | ⟨hCo, _⟩ | ⟨_, hmZ⟩
    · exact x.up_mem hXx hZ hXZ
    · rcases hCtrue with hCm | hCz
      · exact absurd (hCm.symm.trans hCo) one_ne_master.symm
      · exact absurd (hCz.symm.trans hCo) zero_ne_one
    · rw [Set.Subset.antisymm (V.sub_master hZ) hmZ]; exact x.master_mem
  · intro hxZ
    have hZ : V.mem Z := x.sub hxZ
    refine ⟨prodNbhd Example12.zero (prodNbhd Z V.master), ⟨Example12.zero, prodNbhd Z
    V.master,
      Or.inr rfl, ⟨Z, V.master, hxZ, y.master_mem, rfl⟩, rfl⟩,
      prod_mem_prodNbhd Example12.mem_zero (prod_mem_prodNbhd hZ V.master_mem), hZ, ?_⟩
    refine Or.inl ⟨inl_preimage_prodNbhd _ _, ?_⟩
    rw [inr_preimage_prodNbhd, inl_preimage_prodNbhd]
end
```

```
section
set_option linter.unusedVariables false

theorem example_326.{u_1} : And
  (And
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
      (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
      @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
          (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α α)) α
          (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems.
    Example12.Token (Sum α α)
            DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
    NeighbourhoodSystems.prod α α V V))
          V (@DomainTheory.NeighbourhoodSystems.Exercise326.cond α V)
          (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems.
    Example12.Token (Sum α α)
            DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
    NeighbourhoodSystems.prod α α V V)
            DomainTheory.NeighbourhoodSystems.Example23.trueElt (@DomainTheory.
    NeighbourhoodSystems.pair α α V V x y)))
        x)
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
      (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
      @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
          (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α α)) α
          (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems.
    Example12.Token (Sum α α)
            DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
    NeighbourhoodSystems.prod α α V V))
          V (@DomainTheory.NeighbourhoodSystems.Exercise326.cond α V)
          (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems.
    Example12.Token (Sum α α)
            DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
    NeighbourhoodSystems.prod α α V V)
            DomainTheory.NeighbourhoodSystems.Example23.botElt (@DomainTheory.
    NeighbourhoodSystems.pair α α V V x y)))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot α V)))
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
    (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
    @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
        (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α α)) α
        (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems.
    Example12.Token (Sum α α)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
    NeighbourhoodSystems.prod α α V V))
        V (@DomainTheory.NeighbourhoodSystems.Exercise326.cond α V)
        (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems.
    Example12.Token (Sum α α)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
    NeighbourhoodSystems.prod α α V V)
          DomainTheory.NeighbourhoodSystems.Example23.falseElt (@DomainTheory.
    NeighbourhoodSystems.pair α α V V x y)))
```

```
    y) :=
@And.intro
(And
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
    (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
    @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
        (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α α)) α
        (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems.
  Example12.Token (Sum α α)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
  NeighbourhoodSystems.prod α α V V))
        V (@DomainTheory.NeighbourhoodSystems.Exercise326.cond α V)
        (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems.
  Example12.Token (Sum α α)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
  NeighbourhoodSystems.prod α α V V)
          DomainTheory.NeighbourhoodSystems.Example23.trueElt (@DomainTheory.
  NeighbourhoodSystems.pair α α V V x y)))
      x)
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
    (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
    @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
        (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α α)) α
        (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems.
  Example12.Token (Sum α α)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
  NeighbourhoodSystems.prod α α V V))
        V (@DomainTheory.NeighbourhoodSystems.Exercise326.cond α V)
        (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems.
  Example12.Token (Sum α α)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
  NeighbourhoodSystems.prod α α V V)
          DomainTheory.NeighbourhoodSystems.Example23.botElt (@DomainTheory.
  NeighbourhoodSystems.pair α α V V x y)))
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot α V)))
(∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
  (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
  @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
      (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α α)) α
      (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems.
  Example12.Token (Sum α α)
        DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
  NeighbourhoodSystems.prod α α V V))
      V (@DomainTheory.NeighbourhoodSystems.Exercise326.cond α V)
      (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems.
  Example12.Token (Sum α α)
        DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
  NeighbourhoodSystems.prod α α V V)
        DomainTheory.NeighbourhoodSystems.Example23.falseElt (@DomainTheory.
  NeighbourhoodSystems.pair α α V V x y)))
    y)
(@And.intro
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
```

```
      (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
      @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
          (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α α)) α
          (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems.
    Example12.Token (Sum α α)
            DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
    NeighbourhoodSystems.prod α α V V))
          V (@DomainTheory.NeighbourhoodSystems.Exercise326.cond α V)
          (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems.
    Example12.Token (Sum α α)
            DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
    NeighbourhoodSystems.prod α α V V)
            DomainTheory.NeighbourhoodSystems.Example23.trueElt (@DomainTheory.
    NeighbourhoodSystems.pair α α V V x y)))
        x)
     (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
       (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
       @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
           (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α α)) α
           (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems.
    Example12.Token (Sum α α)
            DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
    NeighbourhoodSystems.prod α α V V))
          V (@DomainTheory.NeighbourhoodSystems.Exercise326.cond α V)
          (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems.
    Example12.Token (Sum α α)
            DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
    NeighbourhoodSystems.prod α α V V)
            DomainTheory.NeighbourhoodSystems.Example23.botElt (@DomainTheory.
    NeighbourhoodSystems.pair α α V V x y)))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot α V))
     @DomainTheory.NeighbourhoodSystems.Exercise326.cond_true @DomainTheory.
    NeighbourhoodSystems.Exercise326.cond_bot)
  @DomainTheory.NeighbourhoodSystems.Exercise326.cond_false
end

section
variable {α β : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
variable {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}

theorem Tmem_ge_master {C : Set Example12.Token} (hC : Example12.mem C)
    (h : Example12.master ⊆ C) : C = Example12.master :=
  Set.Subset.antisymm (Example12.neighborhoodSystem.sub_master hC) h

theorem Tmem_ge_one {C : Set Example12.Token} (hC : Example12.mem C)
    (h : Example12.one ⊆ C) : C = Example12.one ∨ C = Example12.master := by
  rcases (Example12.mem_iff C).mp hC with rfl | rfl | rfl
  · exact Or.inr rfl
  · exact absurd (h (by simp [Example12.one] : (1 : Example12.Token) ∈ Example12.one))
      (by simp [Example12.zero])
  · exact Or.inl rfl

theorem Tmem_ge_zero {C : Set Example12.Token} (hC : Example12.mem C)
```

```
    (h : Example12.zero ⊆ C) : C = Example12.zero ∨ C = Example12.master := by
  rcases (Example12.mem_iff C).mp hC with rfl | rfl | rfl
  · exact Or.inr rfl
  · exact Or.inl rfl
  · exact absurd (h (by simp [Example12.zero] : (0 : Example12.Token) ∈ Example12.zero)
    )
      (by simp [Example12.one])

def condSumEmb (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty) :
    ApproximableMap (prod TD (prod V₀ V₁)) (prod TD (prod (sum V₀ V₁ h₀ h₁) (sum V₀ V₁ h₀
     h₁))) :=
  paired (proj₀ TD (prod V₀ V₁))
    (paired ((inMap₀ (h₀ := h₀) (h₁ := h₁)).comp ((proj₀ V₀ V₁).comp (proj₁ TD (prod V₀ V
    ₁))))
      ((inMap₁ (h₀ := h₀) (h₁ := h₁)).comp ((proj₁ V₀ V₁).comp (proj₁ TD (prod V₀ V₁)))))

def condSum (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty) :
    ApproximableMap (prod TD (prod V₀ V₁)) (sum V₀ V₁ h₀ h₁) :=
  (cond (sum V₀ V₁ h₀ h₁)).comp (condSumEmb V₀ V₁ h₀ h₁)

theorem inter_in_oneset {C C' : Set Example12.Token} (hc : C = Example12.master ∨ C =
    Example12.one)

    (hc' : C' = Example12.master ∨ C' = Example12.one) :
    C ∩ C' = Example12.master ∨ C ∩ C' = Example12.one := by
  rcases hc with rfl | rfl <;> rcases hc' with rfl | rfl
  · exact Or.inl (Set.inter_self _)
  · exact Or.inr (Set.univ_inter _)
  · exact Or.inr (Set.inter_univ _)
  · exact Or.inr (Set.inter_self _)

theorem inter_in_zeroset {C C' : Set Example12.Token} (hc : C = Example12.master ∨ C =
     Example12.zero)
    (hc' : C' = Example12.master ∨ C' = Example12.zero) :
    C ∩ C' = Example12.master ∨ C ∩ C' = Example12.zero := by
  rcases hc with rfl | rfl <;> rcases hc' with rfl | rfl
  · exact Or.inl (Set.inter_self _)
  · exact Or.inr (Set.univ_inter _)
  · exact Or.inr (Set.inter_univ _)
  · exact Or.inr (Set.inter_self _)

def whichGuard (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    (W : Set (Option (α ? β))) (C : Set Example12.Token) : Prop :=
  ((∃ X, V₀.mem X ∧ W = inj₀ X) ∧ (C = Example12.master ∨ C = Example12.zero)) ∨
  ((∃ Y, V₁.mem Y ∧ W = inj₁ Y) ∧ (C = Example12.master ∨ C = Example12.one)) ∨
  (W = sumMaster V₀ V₁ ∧ C = Example12.master)

theorem whichGuard_left {W : Set (Option (α ? β))} {C : Set Example12.Token} {X : Set
    α}
    (hg : whichGuard V₀ V₁ W C) (hW : W = inj₀ X) (hX : X.Nonempty) :
    C = Example12.master ∨ C = Example12.zero := by
  rcases hg with ⟨_, hc⟩ | ⟨⟨Y, _, hWY⟩, _⟩ | ⟨hWsm, _⟩
  · exact hc
  · refine absurd (hW.symm.trans hWY) ?_
```

```
    intro h; exact not_inj₀_subset_inj₁ hX h.subset
  · refine absurd (hW.symm.trans hWsm) ?_
    intro h; exact none_mem_inj₀ (h ▶ none_mem_sumMaster)

theorem whichGuard_masterC {W : Set (Option (α ? β))} {C : Set Example12.Token}
    (hg : whichGuard V₀ V₁ W C) (hW : W = sumMaster V₀ V₁) : C = Example12.master := by
  rcases hg with ⟨⟨X, _, hWX⟩, _⟩ | ⟨⟨Y, _, hWY⟩, _⟩ | ⟨_, hc⟩
  · refine absurd (hW.symm.trans hWX) ?_
    intro h; exact none_mem_inj₀ (h ▶ none_mem_sumMaster)
  · refine absurd (hW.symm.trans hWY) ?_
    intro h; exact none_mem_inj₁ (h ▶ none_mem_sumMaster)
  · exact hc

theorem whichGuard_right {W : Set (Option (α ? β))} {C : Set Example12.Token} {Y : Set
    β}
    (hg : whichGuard V₀ V₁ W C) (hW : W = inj₁ Y) (hY : Y.Nonempty) :
    C = Example12.master ∨ C = Example12.one := by
  rcases hg with ⟨⟨X, _, hWX⟩, _⟩ | ⟨_, hc⟩ | ⟨hWsm, _⟩
  · refine absurd (hW.symm.trans hWX) ?_
    intro h; exact not_inj₁_subset_inj₀ hY h.subset
  · exact hc
  · refine absurd (hW.symm.trans hWsm) ?_
    intro h; exact none_mem_inj₁ (h ▶ none_mem_sumMaster)

def whichMap (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty) :
    ApproximableMap (sum V₀ V₁ h₀ h₁) TD where
  rel W C := (sum V₀ V₁ h₀ h₁).mem W ∧ Example12.mem C ∧ whichGuard V₀ V₁ W C
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(sum V₀ V₁ h₀ h₁).master_mem, Example12.mem_master, Or.inr (Or.inr ⟨rfl
    , rfl⟩)⟩
  inter_right := by
    rintro W C C' ⟨hW, _, hg⟩ ⟨_, _, hg'⟩
    rcases hg with ⟨⟨X, hX, rfl⟩, hc⟩ | ⟨⟨Y, hY, rfl⟩, hc⟩ | ⟨rfl, hc⟩
    · have hor := inter_in_zeroset hc (whichGuard_left hg' rfl (h₀ X hX))
      refine ⟨Or.inr (Or.inl ⟨X, hX, rfl⟩), ?_, Or.inl ⟨⟨X, hX, rfl⟩, hor⟩⟩
      rcases hor with h | h
      · rw [h]; exact Example12.mem_master
      · rw [h]; exact Example12.mem_zero
    · have hor := inter_in_oneset hc (whichGuard_right hg' rfl (h₁ Y hY))
      refine ⟨Or.inr (Or.inr ⟨Y, hY, rfl⟩), ?_, Or.inr (Or.inl ⟨⟨Y, hY, rfl⟩, hor⟩)⟩
      rcases hor with h | h
      · rw [h]; exact Example12.mem_master
      · rw [h]; exact Example12.mem_one
    · have hc' := whichGuard_masterC hg' rfl
      subst hc; subst hc'
      rw [Set.inter_self]
      exact ⟨Or.inl rfl, Example12.mem_master, Or.inr (Or.inr ⟨rfl, rfl⟩)⟩
  mono := by
    rintro W W₂ C C₂ ⟨hW, hC, hg⟩ hW₂W hCC₂ hW₂ hC₂
    refine ⟨hW₂, hC₂, ?_⟩
    rcases hg with ⟨⟨X, hX, rfl⟩, hc⟩ | ⟨⟨Y, hY, rfl⟩, hc⟩ | ⟨rfl, hc⟩
    · obtain ⟨X₂, hX₂, rfl⟩ := mem_subset_inj₀ hW₂ hW₂W
      refine Or.inl ⟨⟨X₂, hX₂, rfl⟩, ?_⟩
      rcases hc with rfl | rfl
```

```
      · exact Or.inl (Tmem_ge_master hC₂ hCC₂)
      · exact Or.symm (Tmem_ge_zero hC₂ hCC₂)
    · obtain ⟨Y₂, hY₂, rfl⟩ := mem_subset_inj₁ hW₂ hW₂W
      refine Or.inr (Or.inl ⟨⟨Y₂, hY₂, rfl⟩, ?_⟩)
      rcases hc with rfl | rfl
      · exact Or.inl (Tmem_ge_master hC₂ hCC₂)
      · exact Or.symm (Tmem_ge_one hC₂ hCC₂)
    · subst hc
      have hC₂m : C₂ = Example12.master := Tmem_ge_master hC₂ hCC₂
      rcases hW₂ with rfl | ⟨X₂, hX₂, rfl⟩ | ⟨Y₂, hY₂, rfl⟩
      · exact Or.inr (Or.inr ⟨rfl, hC₂m⟩)
      · exact Or.inl ⟨⟨X₂, hX₂, rfl⟩, Or.inl hC₂m⟩
      · exact Or.inr (Or.inl ⟨⟨Y₂, hY₂, rfl⟩, Or.inl hC₂m⟩)

theorem condSumEmb_toElementMap (t : TD.Element) (x : V₀.Element) (y : V₁.Element) :
    (condSumEmb V₀ V₁ h₀ h₁).toElementMap (pair t (pair x y))
      = pair t (pair ((inMap₀ (h₀ := h₀) (h₁ := h₁)).toElementMap x)
          ((inMap₁ (h₀ := h₀) (h₁ := h₁)).toElementMap y)) := by
  simp only [condSumEmb, toElementMap_paired, toElementMap_comp, toElementMap_proj₀,
    toElementMap_proj₁, fst_pair, snd_pair]

end
end

section
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap
variable {α β : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
variable {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}

theorem condSum_bot (x : V₀.Element) (y : V₁.Element) :
    (condSum V₀ V₁ h₀ h₁).toElementMap (pair Example23.botElt (pair x y)) = (sum V₀ V₁ h
    ₀ h₁).bot := by
  rw [condSum, toElementMap_comp, condSumEmb_toElementMap, cond_bot]

theorem condSum_false (x : V₀.Element) (y : V₁.Element) :
    (condSum V₀ V₁ h₀ h₁).toElementMap (pair Example23.falseElt (pair x y))
      = (inMap₁ (h₀ := h₀) (h₁ := h₁)).toElementMap y := by
  rw [condSum, toElementMap_comp, condSumEmb_toElementMap, cond_false]

theorem condSum_true (x : V₀.Element) (y : V₁.Element) :
    (condSum V₀ V₁ h₀ h₁).toElementMap (pair Example23.trueElt (pair x y))
      = (inMap₀ (h₀ := h₀) (h₁ := h₁)).toElementMap x := by
  rw [condSum, toElementMap_comp, condSumEmb_toElementMap, cond_true]

theorem not_sum_mem_empty : ¬ (sum V₀ V₁ h₀ h₁).mem ∅ := by
  rintro (h | ⟨X, hX, h⟩ | ⟨Y, hY, h⟩)
  · exact absurd (h.symm ▸ none_mem_sumMaster) (Set.notMem_empty _)
  · obtain ⟨a, ha⟩ := inj₀_nonempty (h₀ X hX)
    exact absurd (h ▸ ha) (Set.notMem_empty _)
  · obtain ⟨b, hb⟩ := inj₁_nonempty (h₁ Y hY)
    exact absurd (h ▸ hb) (Set.notMem_empty _)

theorem inMap₀_outMap₀_eq_of_left {x : (sum V₀ V₁ h₀ h₁).Element}
    (hL : ∃ X, V₀.mem X ∧ x.mem (inj₀ X)) :
    (inMap₀ (h₀ := h₀) (h₁ := h₁)).toElementMap ((outMap₀ (h₀ := h₀) (h₁ := h₁)).
```

```
    toElementMap x) = x := by
  obtain ⟨X₀, hX₀, hxX₀⟩ := hL
  apply Element.ext
  intro Z
  constructor
  · rintro ⟨X, ⟨W, hxW, _, _, hLWX⟩, _, hSZ, hinjXZ⟩

    have hxWX₀ : x.mem (W ∩ inj₀ X₀) := x.inter_mem hxW hxX₀
    obtain ⟨X₁, _, hX₁eq⟩ := mem_subset_inj₀ (x.sub hxWX₀) Set.inter_subset_right
    have hX₁X : X₁ ⊆ X := by
      have : leftPart V₀ (W ∩ inj₀ X₀) ⊆ X :=
        (leftPart_mono V₀ Set.inter_subset_left).trans hLWX
      rwa [hX₁eq, leftPart_inj₀] at this
    have : (W ∩ inj₀ X₀) ⊆ Z :=
      hX₁eq ▸ (inj₀_subset_inj₀.mpr hX₁X).trans hinjXZ
    exact x.up_mem hxWX₀ hSZ this
  · intro hxZ
    rcases x.sub hxZ with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
    ·
      exact ⟨V₀.master, ⟨sumMaster V₀ V₁, x.master_mem, (sum V₀ V₁ h₀ h₁).master_mem,
        V₀.master_mem, (leftPart_sumMaster V₀ V₁).subset⟩, V₀.master_mem,
        (sum V₀ V₁ h₀ h₁).master_mem, inj₀_subset_sumMaster V₀.master_mem⟩
    ·
      exact ⟨X', ⟨inj₀ X', hxZ, Or.inr (Or.inl ⟨X', hX', rfl⟩)⟩, hX', (leftPart_inj₀ V₀ X
    ').subset⟩,
      hX', Or.inr (Or.inl ⟨X', hX', rfl⟩)⟩, subset_rfl⟩
    ·
      have := x.inter_mem hxX₀ hxZ
      rw [inj₀_inter_inj₁] at this
      exact absurd (x.sub this) not_sum_mem_empty

theorem inMap₁_outMap₁_eq_of_right {x : (sum V₀ V₁ h₀ h₁).Element}
    (hR : ∃ Y, V₁.mem Y ∧ x.mem (inj₁ Y)) :
    (inMap₁ (h₀ := h₀) (h₁ := h₁)).toElementMap ((outMap₁ (h₀ := h₀) (h₁ := h₁)).
    toElementMap x) = x := by
  obtain ⟨Y₀, hY₀, hxY₀⟩ := hR
  apply Element.ext
  intro Z
  constructor
  · rintro ⟨Y, ⟨W, hxW, _, _, hRWY⟩, _, hSZ, hinjYZ⟩
    have hxWY₀ : x.mem (W ∩ inj₁ Y₀) := x.inter_mem hxW hxY₀
    obtain ⟨Y₁, _, hY₁eq⟩ := mem_subset_inj₁ (x.sub hxWY₀) Set.inter_subset_right
    have hY₁Y : Y₁ ⊆ Y := by
      have : rightPart V₁ (W ∩ inj₁ Y₀) ⊆ Y :=
        (rightPart_mono V₁ Set.inter_subset_left).trans hRWY
      rwa [hY₁eq, rightPart_inj₁] at this
    have : (W ∩ inj₁ Y₀) ⊆ Z :=
      hY₁eq ▸ (inj₁_subset_inj₁.mpr hY₁Y).trans hinjYZ
    exact x.up_mem hxWY₀ hSZ this
  · intro hxZ
    rcases x.sub hxZ with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
    · exact ⟨V₁.master, ⟨sumMaster V₀ V₁, x.master_mem, (sum V₀ V₁ h₀ h₁).master_mem,
        V₁.master_mem, (rightPart_sumMaster V₀ V₁).subset⟩, V₁.master_mem,
        (sum V₀ V₁ h₀ h₁).master_mem, inj₁_subset_sumMaster V₁.master_mem⟩
    · have := x.inter_mem hxY₀ hxZ
      rw [Set.inter_comm, inj₀_inter_inj₁] at this
```

```
      exact absurd (x.sub this) not_sum_mem_empty
    · exact ⟨Y', ⟨inj₁ Y', hxZ, Or.inr (Or.inr ⟨Y', hY', rfl⟩), hY', (rightPart_inj₁ V₁ Y
    ').subset⟩,
        hY', Or.inr (Or.inr ⟨Y', hY', rfl⟩), subset_rfl⟩

theorem sum_element_trichotomy (x : (sum V₀ V₁ h₀ h₁).Element) :
    (∃ X, V₀.mem X ∧ x.mem (inj₀ X)) ∨ (∃ Y, V₁.mem Y ∧ x.mem (inj₁ Y)) ∨
      (∀ W, x.mem W → W = (sum V₀ V₁ h₀ h₁).master) := by
  by_cases hL : ∃ X, V₀.mem X ∧ x.mem (inj₀ X)
  · exact Or.inl hL
  by_cases hR : ∃ Y, V₁.mem Y ∧ x.mem (inj₁ Y)
  · exact Or.inr (Or.inl hR)
  refine Or.inr (Or.inr ?_)
  intro W hxW
  rcases x.sub hxW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
  · rfl
  · exact absurd ⟨X, hX, hxW⟩ hL
  · exact absurd ⟨Y, hY, hxW⟩ hR

theorem which_mem_one {x : (sum V₀ V₁ h₀ h₁).Element} :
    ((whichMap V₀ V₁ h₀ h₁).toElementMap x).mem Example12.one
      ↔ ∃ Y, V₁.mem Y ∧ x.mem (inj₁ Y) := by
  constructor
  · rintro ⟨W, hWx, _, _, hg⟩
    rcases hg with ⟨_, hc⟩ | ⟨⟨Y, hY, rfl⟩, _⟩ | ⟨_, hc⟩
    · rcases hc with h | h
      · exact absurd h one_ne_master
      · exact absurd h zero_ne_one.symm
    · exact ⟨Y, hY, hWx⟩
    · exact absurd hc one_ne_master
  · rintro ⟨Y, hY, hWx⟩
    exact ⟨inj₁ Y, hWx, Or.inr (Or.inr ⟨Y, hY, rfl⟩), Example12.mem_one,
      Or.inr (Or.inl ⟨⟨Y, hY, rfl⟩, Or.inr rfl⟩)⟩

theorem which_mem_zero {x : (sum V₀ V₁ h₀ h₁).Element} :
    ((whichMap V₀ V₁ h₀ h₁).toElementMap x).mem Example12.zero
      ↔ ∃ X, V₀.mem X ∧ x.mem (inj₀ X) := by
  constructor
  · rintro ⟨W, hWx, _, _, hg⟩
    rcases hg with ⟨⟨X, hX, rfl⟩, _⟩ | ⟨_, hc⟩ | ⟨_, hc⟩
    · exact ⟨X, hX, hWx⟩
    · rcases hc with h | h
      · exact absurd h zero_ne_master
      · exact absurd h zero_ne_one
    · exact absurd hc zero_ne_master
  · rintro ⟨X, hX, hWx⟩
    exact ⟨inj₀ X, hWx, Or.inr (Or.inl ⟨X, hX, rfl⟩), Example12.mem_zero,
      Or.inl ⟨⟨X, hX, rfl⟩, Or.inr rfl⟩⟩

theorem cond_which (x : (sum V₀ V₁ h₀ h₁).Element) :
    (cond (sum V₀ V₁ h₀ h₁)).toElementMap
        (pair ((whichMap V₀ V₁ h₀ h₁).toElementMap x)
          (pair ((inMap₀ (h₀ := h₀) (h₁ := h₁)).toElementMap
                  ((outMap₀ (h₀ := h₀) (h₁ := h₁)).toElementMap x))
                ((inMap₁ (h₀ := h₀) (h₁ := h₁)).toElementMap
                  ((outMap₁ (h₀ := h₀) (h₁ := h₁)).toElementMap x)))) = x := by
```

```
  apply Element.ext
  intro Z
  rw [cond_toElementMap_mem, which_mem_zero, which_mem_one]
  constructor
  · rintro (⟨hL, ha⟩ | ⟨hR, hb⟩ | rfl)
    · rwa [inMap₀_outMap₀_eq_of_left hL] at ha
    · rwa [inMap₁_outMap₁_eq_of_right hR] at hb
    · exact x.master_mem
  · intro hxZ
    rcases sum_element_trichotomy x with hL | hR | hN
    · exact Or.inl ⟨hL, by rw [inMap₀_outMap₀_eq_of_left hL]; exact hxZ⟩
    · exact Or.inr (Or.inl ⟨hR, by rw [inMap₁_outMap₁_eq_of_right hR]; exact hxZ⟩)
    · exact Or.inr (Or.inr (hN Z hxZ))
end

section
set_option linter.unusedVariables false

theorem example_326_sum.{u_1, u_2} : And
  (And
    (And
      (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
        {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
        {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
    α V₀ X → @Set.Nonempty α X}
        {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
    β V₁ Y → @Set.Nonempty β Y}
        (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
        (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (Sum
    α β))
            (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
            (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α β)) (Option
    (Sum α β))
            (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems
    .Example12.Token (Sum α β)
              DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
    NeighbourhoodSystems.prod α β V₀ V₁))
            (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
            (@DomainTheory.NeighbourhoodSystems.Exercise326.condSum α β V₀ V₁ h₀ h₁)
            (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems
    .Example12.Token (Sum α β)
              DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
    NeighbourhoodSystems.prod α β V₀ V₁)
              DomainTheory.NeighbourhoodSystems.Example23.botElt
              (@DomainTheory.NeighbourhoodSystems.pair α β V₀ V₁ x y)))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot (Option (Sum α β)
    )
            (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)))
      (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
        {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
        {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
```

```
α V₀ X → @Set.Nonempty α X}
    {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
β V₁ Y → @Set.Nonempty β Y}
    (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
    (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (Sum
α β))
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
        (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α β)) (Option
(Sum α β))
        (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems
.Example12.Token (Sum α β)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁))
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.Exercise326.condSum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems
.Example12.Token (Sum α β)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
          DomainTheory.NeighbourhoodSystems.Example23.falseElt
          (@DomainTheory.NeighbourhoodSystems.pair α β V₀ V₁ x y)))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap β (Option (
Sum α β)) V₁
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁) y)))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
  {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y}
  (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
  (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁),
  @Eq
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (Sum α
β))
      (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
      (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α β)) (Option (
Sum α β))
      (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems.
Example12.Token (Sum α β)
        DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁))
      (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
      (@DomainTheory.NeighbourhoodSystems.Exercise326.condSum α β V₀ V₁ h₀ h₁)
      (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems.
Example12.Token (Sum α β)
        DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
        DomainTheory.NeighbourhoodSystems.Example23.trueElt
        (@DomainTheory.NeighbourhoodSystems.pair α β V₀ V₁ x y)))
```

```
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α (Option (
  Sum α β)) V₀
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁) x)))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
   X → @Set.Nonempty α X}
  {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
   Y → @Set.Nonempty β Y}
  (x :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (Sum α β))
      (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)),
  @Eq
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (Sum α β)
  )
      (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
      (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum (Option (Sum α β))
   (Option (Sum α β))))
      (Option (Sum α β))
      (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems.
  Example12.Token
        (Sum (Option (Sum α β)) (Option (Sum α β))) DomainTheory.
  NeighbourhoodSystems.Exercise326.TD
        (@DomainTheory.NeighbourhoodSystems.prod (Option (Sum α β)) (Option (Sum α β
  ))
          (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
          (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)))
      (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
      (@DomainTheory.NeighbourhoodSystems.Exercise326.cond (Option (Sum α β))
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
      (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems.
  Example12.Token
        (Sum (Option (Sum α β)) (Option (Sum α β))) DomainTheory.
  NeighbourhoodSystems.Exercise326.TD
        (@DomainTheory.NeighbourhoodSystems.prod (Option (Sum α β)) (Option (Sum α β
  ))
          (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
          (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap (Option (
  Sum α β))
          DomainTheory.NeighbourhoodSystems.Example12.Token (@DomainTheory.
  NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD
          (@DomainTheory.NeighbourhoodSystems.Exercise326.whichMap α β V₀ V₁ h₀ h₁) x
  )
        (@DomainTheory.NeighbourhoodSystems.pair (Option (Sum α β)) (Option (Sum α β
  ))
          (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
          (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α (Option
   (Sum α β)) V₀
            (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
            (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁)
```

```
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap (Option
   (Sum α β)) α
              (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₀
              (@DomainTheory.NeighbourhoodSystems.outMap₀ α β V₀ V₁ h₀ h₁) x))
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap β (Option
   (Sum α β)) V₁
              (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
              (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁)
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap (Option
   (Sum α β)) β
              (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₁
              (@DomainTheory.NeighbourhoodSystems.outMap₁ α β V₀ V₁ h₀ h₁) x)))))
    x) :=
@And.intro
(And
  (And
    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
  α V₀ X → @Set.Nonempty α X}
      {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
  β V₁ Y → @Set.Nonempty β Y}
      (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
      (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁),
      @Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (Sum
  α β))
          (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
          (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α β)) (Option
  (Sum α β))
          (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems
  .Example12.Token (Sum α β)
            DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
  NeighbourhoodSystems.prod α β V₀ V₁))
          (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
          (@DomainTheory.NeighbourhoodSystems.Exercise326.condSum α β V₀ V₁ h₀ h₁)
          (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems
  .Example12.Token (Sum α β)
            DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
  NeighbourhoodSystems.prod α β V₀ V₁)
            DomainTheory.NeighbourhoodSystems.Example23.botElt
            (@DomainTheory.NeighbourhoodSystems.pair α β V₀ V₁ x y)))


        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot (Option (Sum α β)
  )
          (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)))
    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
  α V₀ X → @Set.Nonempty α X}
      {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
  β V₁ Y → @Set.Nonempty β Y}
      (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
```

```
    (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (Sum
α β))
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
        (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α β)) (Option
(Sum α β))
        (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems
.Example12.Token (Sum α β)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁))
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.Exercise326.condSum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems
.Example12.Token (Sum α β)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
          DomainTheory.NeighbourhoodSystems.Example23.falseElt
          (@DomainTheory.NeighbourhoodSystems.pair α β V₀ V₁ x y)))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap β (Option (
Sum α β)) V₁
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁) y)))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
  {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y}
  (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
  (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁),
  @Eq
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (Sum α
β))
      (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
      (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α β)) (Option (
Sum α β))
      (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems.
Example12.Token (Sum α β)
        DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁))
      (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
      (@DomainTheory.NeighbourhoodSystems.Exercise326.condSum α β V₀ V₁ h₀ h₁)
      (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems.
Example12.Token (Sum α β)
        DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
        DomainTheory.NeighbourhoodSystems.Example23.trueElt
        (@DomainTheory.NeighbourhoodSystems.pair α β V₀ V₁ x y)))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α (Option (
Sum α β)) V₀
      (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
      (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁) x)))
```

```
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
 {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
 {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
  X → @Set.Nonempty α X}
 {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
  Y → @Set.Nonempty β Y}
 (x :
   @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (Sum α β))
     (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)),
 @Eq
   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (Sum α β)
)
     (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
   (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
     (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum (Option (Sum α β))
  (Option (Sum α β))))
     (Option (Sum α β))
     (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems.
 Example12.Token
       (Sum (Option (Sum α β)) (Option (Sum α β))) DomainTheory.
 NeighbourhoodSystems.Exercise326.TD
       (@DomainTheory.NeighbourhoodSystems.prod (Option (Sum α β)) (Option (Sum α β
))
         (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
         (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)))
     (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
     (@DomainTheory.NeighbourhoodSystems.Exercise326.cond (Option (Sum α β))
       (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
     (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems.
 Example12.Token
       (Sum (Option (Sum α β)) (Option (Sum α β))) DomainTheory.
 NeighbourhoodSystems.Exercise326.TD
       (@DomainTheory.NeighbourhoodSystems.prod (Option (Sum α β)) (Option (Sum α β
))
         (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
         (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
       (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap (Option (
 Sum α β))
         DomainTheory.NeighbourhoodSystems.Example12.Token (@DomainTheory.
 NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
         DomainTheory.NeighbourhoodSystems.Exercise326.TD
         (@DomainTheory.NeighbourhoodSystems.Exercise326.whichMap α β V₀ V₁ h₀ h₁) x
 )
       (@DomainTheory.NeighbourhoodSystems.pair (Option (Sum α β)) (Option (Sum α β
 ))
         (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
         (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α (Option
  (Sum α β)) V₀
           (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
           (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁)
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap (Option
  (Sum α β)) α
             (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₀
             (@DomainTheory.NeighbourhoodSystems.outMap₀ α β V₀ V₁ h₀ h₁) x))
```

```
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap β (Option
  (Sum α β)) V₁
            (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
            (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap (Option
  (Sum α β)) β
              (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₁
              (@DomainTheory.NeighbourhoodSystems.outMap₁ α β V₀ V₁ h₀ h₁) x)))))
   x)
(@And.intro
  (And
    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
 α V₀ X → @Set.Nonempty α X}
      {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
 β V₁ Y → @Set.Nonempty β Y}
      (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
      (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁),
      @Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (Sum
 α β))
          (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
          (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α β)) (Option
 (Sum α β))
          (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems
 .Example12.Token (Sum α β)
            DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
 NeighbourhoodSystems.prod α β V₀ V₁))
          (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
          (@DomainTheory.NeighbourhoodSystems.Exercise326.condSum α β V₀ V₁ h₀ h₁)
          (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems
 .Example12.Token (Sum α β)
            DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
 NeighbourhoodSystems.prod α β V₀ V₁)
            DomainTheory.NeighbourhoodSystems.Example23.botElt
            (@DomainTheory.NeighbourhoodSystems.pair α β V₀ V₁ x y)))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot (Option (Sum α β)
 )
          (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)))
    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
 α V₀ X → @Set.Nonempty α X}
      {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
 β V₁ Y → @Set.Nonempty β Y}
      (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
      (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁),
      @Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (Sum
 α β))
          (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
```

```
        (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α β)) (Option
(Sum α β))
        (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems
.Example12.Token (Sum α β)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁))
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.Exercise326.condSum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems
.Example12.Token (Sum α β)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
          DomainTheory.NeighbourhoodSystems.Example23.falseElt
          (@DomainTheory.NeighbourhoodSystems.pair α β V₀ V₁ x y)))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap β (Option (
Sum α β)) V₁
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁) y)))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
  {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y}
  (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
  (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁),
  @Eq
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (Sum α
β))
      (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
      (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α β)) (Option (
Sum α β))
      (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems.
Example12.Token (Sum α β)
        DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁))
      (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
      (@DomainTheory.NeighbourhoodSystems.Exercise326.condSum α β V₀ V₁ h₀ h₁)
      (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems.
Example12.Token (Sum α β)
        DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
        DomainTheory.NeighbourhoodSystems.Example23.trueElt
        (@DomainTheory.NeighbourhoodSystems.pair α β V₀ V₁ x y)))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α (Option (
Sum α β)) V₀
      (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
      (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁) x))
(@And.intro
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
α V₀ X → @Set.Nonempty α X}
```

```
    {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
β V₁ Y → @Set.Nonempty β Y}
    (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
    (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (Sum
α β))
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
        (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α β)) (Option
(Sum α β))
        (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems
.Example12.Token (Sum α β)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁))
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.Exercise326.condSum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems
.Example12.Token (Sum α β)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
          DomainTheory.NeighbourhoodSystems.Example23.botElt
          (@DomainTheory.NeighbourhoodSystems.pair α β V₀ V₁ x y)))
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot (Option (Sum α β)
)
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)))
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
α V₀ X → @Set.Nonempty α X}
    {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
β V₁ Y → @Set.Nonempty β Y}
    (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀)
    (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (Sum
α β))
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
        (Sum DomainTheory.NeighbourhoodSystems.Example12.Token (Sum α β)) (Option
(Sum α β))
        (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems
.Example12.Token (Sum α β)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁))
        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.Exercise326.condSum α β V₀ V₁ h₀ h₁)
        (@DomainTheory.NeighbourhoodSystems.pair DomainTheory.NeighbourhoodSystems
.Example12.Token (Sum α β)
          DomainTheory.NeighbourhoodSystems.Exercise326.TD (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
          DomainTheory.NeighbourhoodSystems.Example23.falseElt
          (@DomainTheory.NeighbourhoodSystems.pair α β V₀ V₁ x y)))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap β (Option (
Sum α β)) V₁
```

```
            (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
            (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁) y))
      @DomainTheory.NeighbourhoodSystems.Exercise326.condSum_bot
      @DomainTheory.NeighbourhoodSystems.Exercise326.condSum_false)
    @DomainTheory.NeighbourhoodSystems.Exercise326.condSum_true)
  @DomainTheory.NeighbourhoodSystems.Exercise326.cond_which
end
end DomainTheory.NeighbourhoodSystems.Exercise326
end
```

3.4.28 Exercise 3.27 — function space via closure

(For set theorists.) Give another proof that the family of approximable mappings $f : D_0 \to D_1$ is isomorphic to a domain by employing the general argument of Exercise 2.22. How does this compare with the proof method of 3.9 and 3.10? Can the general remarks also be employed to show that

$$\text{eval} : (D_1 \to D_2) \times D_1 \to D_2$$

is approximable without bringing in the neighbourhoods in such an explicit way? (Hint: Use 3.5 and the idea of Exercise 2.12.)

Exercise_3_27.lean

```
module
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_22
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Lemma_3_6
public import Mathlib.Order.Directed
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems.Exercise327
section
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap

section
variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

def graph (f : ApproximableMap V₀ V₁) : Set (Set α × Set β) := {p | f.rel p.1 p.2}

@[simp] theorem mem_graph {f : ApproximableMap V₀ V₁} {p : Set α × Set β} :
    p ∈ graph f ↔ f.rel p.1 p.2 := Iff.rfl

def C (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) : Set (Set (Set α × Set
    β)) :=
  Set.range (graph (V₀ := V₀) (V₁ := V₁))

theorem C_nonempty : (C V₀ V₁).Nonempty :=
  ⟨graph (constMap V₀ V₁.bot), constMap V₀ V₁.bot, rfl⟩

theorem graph_injective : Function.Injective (graph (V₀ := V₀) (V₁ := V₁)) :=
  fun _ _ h => ApproximableMap.ext fun X Y => Set.ext_iff.mp h (X, Y)

noncomputable def graphEquiv (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
```

```
    ApproximableMap V₀ V₁ ≃o {X : Set (Set α × Set β) // X ∈ C V₀ V₁} where
  toFun f := ⟨graph f, f, rfl⟩
  invFun X := X.2.choose
  left_inv f := graph_injective (⟨graph f, f, rfl⟩ : {X // X ∈ C V₀ V₁}).2.choose_spec
  right_inv X := Subtype.ext X.2.choose_spec
  map_rel_iff' := by
    intro f g
    show graph f ⊆ graph g ↔ f ≤ g
    rw [ApproximableMap.le_iff]
    exact ⟨fun h X Y hf => h (a := (X, Y)) hf, fun h p hp => h p.1 p.2 hp⟩

def joinMap (? : Set (Set (Set α × Set β))) (h? : ? ⊆ C V₀ V₁) (hne : ?.Nonempty)
    (hdir : DirectedOn (· ⊆ ·) ?) : ApproximableMap V₀ V₁ where
  rel X Y := ∃ S ∈ ?, (X, Y) ∈ S
  rel_dom := by rintro X Y ⟨S, hS, hp⟩; obtain ⟨f, rfl⟩ := h? hS; exact f.rel_dom hp
  rel_cod := by rintro X Y ⟨S, hS, hp⟩; obtain ⟨f, rfl⟩ := h? hS; exact f.rel_cod hp
  master_rel := by
    obtain ⟨S, hS⟩ := hne; obtain ⟨f, rfl⟩ := h? hS
    exact ⟨graph f, hS, f.master_rel⟩
  inter_right := by
    rintro X Y Y' ⟨S, hS, hp⟩ ⟨S', hS', hp'⟩
    obtain ⟨S₃, hS₃, hSS₃, hS'S₃⟩ := hdir S hS S' hS'
    obtain ⟨f, rfl⟩ := h? hS₃
    exact ⟨graph f, hS₃, f.inter_right (hSS₃ hp) (hS'S₃ hp')⟩
  mono := by
    rintro X X' Y Y' ⟨S, hS, hp⟩ hX'X hYY' hX' hY'
    obtain ⟨f, rfl⟩ := h? hS
    exact ⟨graph f, hS, f.mono hp hX'X hYY' hX' hY'⟩

def meetMap (? : Set (Set (Set α × Set β))) (h? : ? ⊆ C V₀ V₁) (hne : ?.Nonempty) :
    ApproximableMap V₀ V₁ where
  rel X Y := ∀ S ∈ ?, (X, Y) ∈ S
  rel_dom := by
    intro X Y h
    obtain ⟨S, hS⟩ := hne; obtain ⟨f, rfl⟩ := h? hS
    exact f.rel_dom (h _ hS)
  rel_cod := by
    intro X Y h
    obtain ⟨S, hS⟩ := hne; obtain ⟨f, rfl⟩ := h? hS
    exact f.rel_cod (h _ hS)
  master_rel := by
    intro S hS; obtain ⟨f, rfl⟩ := h? hS; exact f.master_rel
  inter_right := by
    intro X Y Y' hY hY' S hS
    obtain ⟨f, rfl⟩ := h? hS
    exact f.inter_right (hY _ hS) (hY' _ hS)
  mono := by
    intro X X' Y Y' h hX'X hYY' hX' hY' S hS
    obtain ⟨f, rfl⟩ := h? hS
    exact f.mono (h _ hS) hX'X hYY' hX' hY'

theorem sInter_eq_graph_meetMap (? : Set (Set (Set α × Set β))) (h? : ? ⊆ C V₀ V₁)
    (hne : ?.Nonempty) : ⋂₀ ? = graph (meetMap ? h? hne) := by
  ext p
  simp only [Set.mem_sInter, mem_graph]
  exact ⟨fun h S hS => h S hS, fun h S hS => h S hS⟩
```

```
theorem C_inter : ∀ ? : Set (Set (Set α × Set β)), ?.Nonempty → ? ⊆ C V₀ V₁ → ⋂₀ ? ∈
    C V₀ V₁ := by
  intro ? hne h?
  rw [sInter_eq_graph_meetMap ? h? hne]
  exact ⟨meetMap ? h? hne, rfl⟩

theorem sUnion_eq_graph_joinMap (? : Set (Set (Set α × Set β))) (h? : ? ⊆ C V₀ V₁)
    (hne : ?.Nonempty) (hdir : DirectedOn (· ⊆ ·) ?) :
    ⋃₀ ? = graph (joinMap ? h? hne hdir) := by
  ext p
  simp only [Set.mem_sUnion, mem_graph]
  exact ⟨fun ⟨S, hS, hp⟩ => ⟨S, hS, hp⟩, fun ⟨S, hS, hp⟩ => ⟨S, hS, hp⟩⟩

theorem C_dir : ∀ ? : Set (Set (Set α × Set β)), ?.Nonempty → ? ⊆ C V₀ V₁ →
    DirectedOn (· ⊆ ·) ? → ⋃₀ ? ∈ C V₀ V₁ := by
  intro ? hne h? hdir
  rw [sUnion_eq_graph_joinMap ? h? hne hdir]
  exact ⟨joinMap ? h? hne hdir, rfl⟩

end

section
set_option linter.unusedVariables false

theorem example_327.{u_1, u_2} : ∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
    NeighbourhoodSystems.NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β} (? : Set (Set (Prod (
    Set α) (Set β)))),
  @Set.Nonempty (Set (Prod (Set α) (Set β))) ? →
    @LE.le (Set (Set (Prod (Set α) (Set β)))) (@Set.instLE (Set (Prod (Set α) (Set β))
    )) ?
        (@DomainTheory.NeighbourhoodSystems.Exercise327.C α β V₀ V₁) →
      @DirectedOn (Set (Prod (Set α) (Set β)))
          (fun (x1 x2 : Set (Prod (Set α) (Set β))) =>
            @LE.le (Set (Prod (Set α) (Set β))) (@Set.instLE (Prod (Set α) (Set β)))
    x1 x2)
          ? →
        @Membership.mem (Set (Prod (Set α) (Set β))) (Set (Set (Prod (Set α) (Set β)))
    )
          (@Set.instMembership (Set (Prod (Set α) (Set β))))
          (@DomainTheory.NeighbourhoodSystems.Exercise327.C α β V₀ V₁) (@Set.sUnion (
    Prod (Set α) (Set β)) ?) :=
  @DomainTheory.NeighbourhoodSystems.Exercise327.C_dir
end

section
variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

noncomputable def funSpaceReprIso (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem
    β) :
    (Exercise222.reprSystem (C V₀ V₁) C_inter C_nonempty).Element ≃o (funSpace V₀ V₁).
    Element :=
  (Exercise222.reprIso (C V₀ V₁) C_inter C_nonempty C_dir).trans
    ((graphEquiv V₀ V₁).symm.trans (funSpaceEquiv V₀ V₁).symm)
end
```

```
end

end DomainTheory.NeighbourhoodSystems.Exercise327
end
```

3.4.29 Exercise 3.28 — minimal step function

In the function space $(D_0 \to D_1)$ let

$$\bigcap\{[X_i, Y_i] \mid i < n\}$$

be a (non-empty) neighbourhood. In 3.9 the minimal element of this neighbourhood is characterized as a relation f_0. Show that as an elementwise mapping it can be defined by the formula

$$f_0(x) = \bigsqcup\{\uparrow Y_i \mid x \in [X_i]\},$$

for $x \in |D_0|$. Try to draw a picture of $|D_0|$ with neighbourhoods $[X_i]$ and the corresponding values of the function f_0.

LECTURE IV FIXED POINTS AND RECURSION

Having at this point a large supply of examples of domains (and further constructs of new domains), we now have to consider some other ways of defining functions — other than by explicit compositions of the very basic functions already mentioned. One of the most fruitful techniques is an infinitely iterated composition that is at the back of the idea of recursion. We will use the process over and over again in these lectures, not only to define new functions but also to define new domains. The heart of the matter lies in the so-called "Fixed-point Theorem":

Exercise_3_28.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_27
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
section
variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

def leastMapVals (L : List (Set α × Set β)) (hL : ∀ p ∈ L, V₀.mem p.1 ∧ V₁.mem p.2)
    (x : V₀.Element) : Set V₁.Element :=
  {z | ∃ (p : Set α × Set β) (hp : p ∈ L), x.mem p.1 ∧ z = V₁.principal (hL p hp).2}

theorem Element.mem_interYs_of (z : V₁.Element) {L : List (Set α × Set β)} {X : Set α}
    (hall : ∀ p ∈ L, X ⊆ p.1 → z.mem p.2) : z.mem (interYs V₁.master L X) := by
  induction L with
  | nil => exact z.master_mem
  | cons p L ih =>
```

```
    have htail : ∀ q ∈ L, X ⊆ q.1 → z.mem q.2 :=
      fun q hq => hall q (List.mem_cons.mpr (Or.inr hq))
    by_cases hXp : X ⊆ p.1
    · have heq : interYs V₁.master (p :: L) X = p.2 ∩ interYs V₁.master L X := by
        rw [interYs_cons]; ext w
        simp only [Set.mem_inter_iff, Set.mem_ofPred_eq]
        exact ⟨fun ⟨h1, h2⟩ => ⟨h1 hXp, h2⟩, fun ⟨h1, h2⟩ => ⟨fun _ => h1, h2⟩⟩
      rw [heq]
      exact z.inter_mem (hall p (List.mem_cons.mpr (Or.inl rfl)) hXp) (ih htail)
    · have heq : interYs V₁.master (p :: L) X = interYs V₁.master L X := by
        rw [interYs_cons]; ext w
        simp only [Set.mem_inter_iff, Set.mem_ofPred_eq]
        exact ⟨fun h => h.2, fun h => ⟨fun hc => absurd hc hXp, h⟩⟩
      rw [heq]
      exact ih htail

theorem leastMap_toElementMap_le_of_ub {L : List (Set α × Set β)}
    (hL : ∀ p ∈ L, V₀.mem p.1 ∧ V₁.mem p.2)
    (hcons : ∀ {X}, V₀.mem X → V₁.mem (interYs V₁.master L X)) {x : V₀.Element} {z : V₁
    .Element}
    (hz : ∀ w ∈ leastMapVals L hL x, w ≤ z) :
    (leastMap L hL hcons).toElementMap x ≤ z := by
  rintro Y' ⟨X', hX'x, hX'mem, hY'mem, hsub⟩
  have hzint : z.mem (interYs V₁.master L X') := by
    apply Element.mem_interYs_of
    intro p hp hX'p
    have hp1x : x.mem p.1 := x.up_mem hX'x (hL p hp).1 hX'p
    have hle : V₁.principal (hL p hp).2 ≤ z := hz _ ⟨p, hp, hp1x, rfl⟩
    exact hle p.2 ⟨(hL p hp).2, subset_rfl⟩
  exact z.up_mem hzint hY'mem hsub

theorem val_le_leastMap_toElementMap {L : List (Set α × Set β)}
    (hL : ∀ p ∈ L, V₀.mem p.1 ∧ V₁.mem p.2)
    (hcons : ∀ {X}, V₀.mem X → V₁.mem (interYs V₁.master L X)) {x : V₀.Element}
    {p : Set α × Set β} (hp : p ∈ L) (hp1x : x.mem p.1) :
    V₁.principal (hL p hp).2 ≤ (leastMap L hL hcons).toElementMap x := by
  have hmem : ((leastMap L hL hcons).toElementMap x).mem p.2 :=
    ⟨p.1, hp1x, leastMap_mem_stepFun hL hcons p hp⟩
  intro Z hZ
  exact ((leastMap L hL hcons).toElementMap x).up_mem hmem hZ.1 hZ.2

theorem leastMapVals_bounded {L : List (Set α × Set β)} (hL : ∀ p ∈ L, V₀.mem p.1 ∧ V₁
    .mem p.2)
    (hcons : ∀ {X}, V₀.mem X → V₁.mem (interYs V₁.master L X)) (x : V₀.Element) :
    V₁.Bounded (leastMapVals L hL x) := by
  refine ⟨(leastMap L hL hcons).toElementMap x, ?_⟩
  rintro w ⟨p, hp, hp1x, rfl⟩
  exact val_le_leastMap_toElementMap hL hcons hp hp1x

theorem toElementMap_leastMap_eq_sSup (L : List (Set α × Set β))
    (hL : ∀ p ∈ L, V₀.mem p.1 ∧ V₁.mem p.2)
    (hcons : ∀ {X}, V₀.mem X → V₁.mem (interYs V₁.master L X)) (x : V₀.Element) :
    (leastMap L hL hcons).toElementMap x
      = V₁.sSup (leastMapVals L hL x) (leastMapVals_bounded hL hcons x) := by
  apply le_antisymm
  · apply leastMap_toElementMap_le_of_ub hL hcons
```

```
    intro w hw
    exact V₁.le_sSup _ (leastMapVals_bounded hL hcons x) hw
  · apply V₁.sSup_le
    rintro w ⟨p, hp, hp1x, rfl⟩
    exact val_le_leastMap_toElementMap hL hcons hp hp1x
end

section
set_option linter.unusedVariables false

theorem example_328.{u_1, u_2} : ∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
    NeighbourhoodSystems.NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β} (L : List (Prod (Set α)
     (Set β)))
  (hL :
    ∀ (p : Prod (Set α) (Set β)),
      @Membership.mem (Prod (Set α) (Set β)) (List (Prod (Set α) (Set β))) (@List.
    instMembership (Prod (Set α) (Set β)))
          L p →
        And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ (@Prod.fst
    (Set α) (Set β) p))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁ (@Prod.snd (
    Set α) (Set β) p)))
  (hcons :
    ∀ {X : Set α},
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀ X →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
          (@DomainTheory.NeighbourhoodSystems.interYs α β
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.master β V₁) L X))
  (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V₀),
  @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β V₁)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α β V₀ V₁
      (@DomainTheory.NeighbourhoodSystems.leastMap α β V₀ V₁ L hL fun {X : Set α} =>
    @hcons X) x)
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup β V₁
      (@DomainTheory.NeighbourhoodSystems.leastMapVals α β V₀ V₁ L hL x)
      (@DomainTheory.NeighbourhoodSystems.leastMapVals_bounded α β V₀ V₁ L hL (fun {X :
     Set α} => @hcons X) x)) :=
  @DomainTheory.NeighbourhoodSystems.toElementMap_leastMap_eq_sSup
end
end

end DomainTheory.NeighbourhoodSystems
end
```

3.5 Fixed points and recursion

Dependency diagram. Each box is one item. The arrowhead is on the item that imports. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it is not shown. Blue is a definition, amber an example, red a theorem, and indigo an exercise.

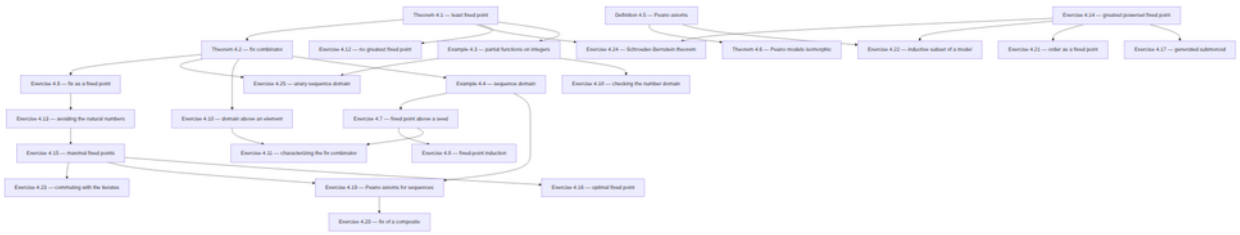

Figure 42: Fixed points and recursion.

3.5.1 Introduction

LECTURE IV FIXED POINTS AND RECURSION

Having at this point a large supply of examples of domains (and further constructs of new domains), we now have to consider some other ways of defining functions — other than by explicit compositions of the very basic functions already mentioned. One of the most fruitful techniques is an infinitely iterated composition that is at the back of the idea of recursion. We will use the process over and over again in these lectures, not only to define new functions but also to define new domains. The heart of the matter lies in the so-called "Fixed-point Theorem":

3.5.2 Theorem 4.1 — least fixed point

THEOREM 4.1. For any approximable mapping $f : D \to D$ on any domain, there exists a least element $x \in |D|$ where

$$f(x) = x.$$

Proof: Let f^n for $n \in \mathbf{N}$ stand for the n-fold composition of f with itself. That is,

$$f^0 = I_D, \text{ and}$$

$$f^{n+1} = f \circ f^n.$$

Define

$$x = \{X \in D \mid \Delta \; f^n \; X, \text{ for some } n \in \mathbf{N}\}.$$

We see $X \in x$ iff there is a finite sequence $\Delta = X_0, X_1, \ldots, X_n = X$ where $X_i \; f \; X_{i+1}$ holds for all $i < n$. Now since $\Delta \; f \; \Delta$ automatically holds, a sequence for an $X \in x$ can always be extended to a longer sequence just by adding more Δ's on the front.

We want to prove $x \in |D|$. Clearly $\Delta \in x$; and if $X \subseteq Y$ and $X \in x$, then $Y \in x$. All that remains to be shown is the closure of x under intersection. Note that if

$$U \; f \; V \quad \text{and} \quad U' \; f \; V'$$

hold and U, U' are consistent in D, then V and V' are consistent and
$(U \cap U') \; f \; (V \cap V')$
must hold. Generalizing this to sequences, if

$$\Delta = X_0 \; f \; X_1 \; f \; \cdots \; f \; X_n = X, \text{ and}$$

$$\Delta = Y_0 \; f \; Y_1 \; f \; \cdots \; f \; Y_n = Y$$

both hold (and note we have arranged the lengths of the two sequences to be equal), then each pair X_i, Y_i is consistent and we have

$$\Delta = (X_0 \cap Y_0) \; f \; (X_1 \cap Y_1) \; f \; \cdots \; f \; (X_n \cap Y_n) = X \cap Y.$$

This establishes the desired closure.

We also note that if $X \in x$ and $X \; f \; Y$ then $Y \in x$. Therefore, $f(x) \subseteq x$ and indeed by its very construction x is the *least* element of $|D|$ with this property. (Why?) But f is monotone, so $f(f(x)) \subseteq f(x)$; hence, $x = f(x)$. By what we have already said it must be the least such element. □

Because the element we have shown to exist in 4.1 is a least element, it is unique. That is, we have associated with each $f : D \to D$ a special element $x_f \in |D|$ determined by the choice of f. A function has therefore been defined mapping the set $|D \to D|$ into $|D|$. The next result shows that this function, or operator on functions, is in fact approximable.

Theorem_4_1.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Definition_3_8

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α : Type*} {V : NeighborhoodSystem α}
namespace ApproximableMap

def iterMap (f : ApproximableMap V V) : ℕ → ApproximableMap V V
  | 0 => idMap V
  | (n + 1) => f.comp (f.iterMap n)

@[simp] theorem iterMap_zero (f : ApproximableMap V V) : f.iterMap 0 = idMap V := rfl

@[simp] theorem iterMap_succ (f : ApproximableMap V V) (n : ℕ) :
    f.iterMap (n + 1) = f.comp (f.iterMap n) := rfl

theorem comp_mono {f g a b : ApproximableMap V V} (hfg : f ≤ g) (hab : a ≤ b) :
    f.comp a ≤ g.comp b := by
  intro X Z h
  obtain ⟨Y, hXY, hYZ⟩ := h
  exact ⟨Y, hab X Y hXY, hfg Y Z hYZ⟩

theorem iterMap_mono_map {f g : ApproximableMap V V} (hfg : f ≤ g) (n : ℕ) :
    f.iterMap n ≤ g.iterMap n := by
  induction n with
```

```
  | zero => show (idMap V) ≤ (idMap V); exact le_refl _
  | succ k ih => exact comp_mono hfg ih

theorem iter_comm (f : ApproximableMap V V) (n : ℕ) :
    f.comp (f.iterMap n) = (f.iterMap n).comp f := by
  induction n with
  | zero => rw [show f.iterMap 0 = idMap V from rfl, comp_idMap, idMap_comp]
  | succ n ih =>
    show f.comp (f.comp (f.iterMap n)) = (f.comp (f.iterMap n)).comp f
    rw [comp_assoc, ← ih]

theorem rel_master_succ (f : ApproximableMap V V) {n : ℕ} {X : Set α}
    (h : (f.iterMap n).rel V.master X) : (f.iterMap (n + 1)).rel V.master X := by
  have hcomm : f.iterMap (n + 1) = (f.iterMap n).comp f := iter_comm f n
  rw [hcomm]
  exact ⟨V.master, f.master_rel, h⟩

theorem rel_master_mono (f : ApproximableMap V V) {n m : ℕ} (hnm : n ≤ m) {X : Set α}
    (h : (f.iterMap n).rel V.master X) : (f.iterMap m).rel V.master X := by
  induction hnm with
  | refl => exact h
  | step _ ih => exact rel_master_succ f ih

def fixElement (f : ApproximableMap V V) : V.Element where
  mem X := ∃ n, (f.iterMap n).rel V.master X
  sub := fun ⟨n, h⟩ => (f.iterMap n).rel_cod h
  master_mem := ⟨0, show (idMap V).rel V.master V.master from (idMap V).master_rel⟩
  inter_mem := by
    rintro X Y ⟨n, hn⟩ ⟨m, hm⟩
    refine ⟨max n m, ?_⟩
    have hX : (f.iterMap (max n m)).rel V.master X := rel_master_mono f (le_max_left n
     m) hn
    have hY : (f.iterMap (max n m)).rel V.master Y := rel_master_mono f (le_max_right
    n m) hm
    exact (f.iterMap (max n m)).inter_right hX hY
  up_mem := by
    rintro X Y ⟨n, hn⟩ hYmem hXY
    exact ⟨n, (f.iterMap n).mono hn subset_rfl hXY V.master_mem hYmem⟩

@[simp] theorem mem_fixElement (f : ApproximableMap V V) {X : Set α} :
    f.fixElement.mem X ↔ ∃ n, (f.iterMap n).rel V.master X := Iff.rfl

theorem fixElement_mono {f g : ApproximableMap V V} (hfg : f ≤ g) :
    f.fixElement ≤ g.fixElement := by
  rintro X ⟨n, hn⟩
  exact ⟨n, iterMap_mono_map hfg n V.master X hn⟩

end ApproximableMap
end

end DomainTheory.NeighbourhoodSystems
end
```

3.5.3 Theorem 4.2 — fix combinator

THEOREM 4.2. For any domain D, there is an approximable mapping

$$\mathrm{fix} : (D \to D) \to D$$

such that if $f : D \to D$ is any approximable mapping, then

(i) $\mathrm{fix}(f) = f(\mathrm{fix}(f))$.

Furthermore, if $x \in |D|$, then

(ii) $f(x) \subseteq x$ implies $\mathrm{fix}(f) \subseteq x$.

And this last property implies that fix is unique. Explicitly we can characterize fix by the equation:

(iii)

$$\mathrm{fix}(f) = \bigcup_{n=0}^{\infty} f^n(\bot),$$

for all $f : D \to D$.

Proof: Formula (iii) can be put in a more elementary form:

$$\mathrm{fix}(f) = \{X \mid \Delta f^n X, \text{ for some } n \in \mathbf{N}\}.$$

To show an elementwise mapping approximable we can use the formula of Exercise 2.9, applied to the above as the definition of fix:

$$(*) \quad \mathrm{fix}(f) = \bigcup\{\mathrm{fix}(\uparrow F) \mid f \in [F]\},$$

where F ranges over the neighbourhoods of $(D \to D)$, and where $\uparrow F$ can be considered to be the least element of F as calculated in 3.9.

Now from the definition of fix, it is clear that whenever $f \subseteq g$, then $\mathrm{fix}(f) \subseteq \mathrm{fix}(g)$, because $f^n \subseteq g^n$. (That is, fix is obviously monotone.) Next, if $f \in F$, then $\uparrow F$ is a (finite) approximation to f; so $\uparrow F \subseteq f$ and $\mathrm{fix}(\uparrow F) \subseteq \mathrm{fix}(f)$. This means that half of equation (*) already holds by monotonicity. All that is left is to prove the other half.

So suppose $X \in \mathrm{fix}(f)$. Then, as we have already remarked, there is a finite sequence of neighbourhoods where

$$\Delta = X_0 \; f \; X_1 \; \ldots \; X_{n-1} \; f \; X_n = X.$$

Let the function-space neighbourhood be defined as

$$F = \bigcap\{[X_i, X_{i+1}] \mid i < n\},$$

and note that since $f \in [F]$ we have at once consistency. But, by 3.9, $\uparrow F \in [F]$, so the *same* sequence of X_i is sufficient to show that

$$X \in \mathrm{fix}(\uparrow F).$$

In other words, if X belongs to the left-hand side of (*), it also belongs to the right-hand side. This completes the proof of (*).

Formula (i) is just a restatement of what we proved in 4.1. And (ii) follows easily, because $f(x) \subseteq x$ implies that $\Delta \in x$ and whenever $X \in x$ and $X\ f\ Y$, then $Y \in x$. Thus, by induction, if $\Delta f^n X$, then $X \in x$. So $\mathrm{fix}(f) \subseteq x$.

Finally, if $\mathrm{fax} : (D \to D) \to D$ were any other operator satisfying (i) and (ii), we would prove at once that

$$\mathrm{fix}(f) \subseteq \mathrm{fax}(f) \quad \text{and}$$

$$\mathrm{fax}(f) \subseteq \mathrm{fix}(f).$$

That is to say, the two operators are identical. □

The reader may have noticed that we used recursion in the proof of 4.1 (we had to define f^n for all $n \in \mathbf{N}$). But 4.1 and 4.2 can be used to justify definitions by recursion on a large number of domains — definitions where the process of iteration is far from being as straightforward. In discussing this point, let us start with some basic examples.

Theorem_4_2.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_11
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_8
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_1

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_10
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7
public import Mathlib.Tactic.Bound

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α : Type*} {V : NeighborhoodSystem α}
open ApproximableMap

def fixMap (V : NeighborhoodSystem α) : ApproximableMap (funSpace V V) V :=
  ofMono (fun W hW => (toApproxMap ((funSpace V V).principal hW)).fixElement)
    (fun W W' hW hW' hW'W => by
      apply fixElement_mono
      exact (funSpaceEquiv V V).monotone
        (((funSpace V V).principal_le_iff hW hW').mpr hW'W))
end
```

```
section
variable {α : Type*} {V : NeighborhoodSystem α}

namespace ApproximableMap

def iterElem (f : ApproximableMap V V) (n : ℕ) : V.Element := (f.iterMap n).
    toElementMap V.bot

end ApproximableMap

open ApproximableMap

theorem exists_principal_iterMap (V : NeighborhoodSystem α) (φ : (funSpace V V).
    Element) :
    ∀ (n : ℕ) (X : Set α), ((toApproxMap φ).iterMap n).rel V.master X →
      ∃ (W : Set (ApproximableMap V V)) (hw : φ.mem W),
        ((toApproxMap ((funSpace V V).principal (φ.sub hw))).iterMap n).rel V.master X
     := by
  intro n
  induction n with
  | zero =>
    intro X hX
    exact ⟨(funSpace V V).master, φ.master_mem, hX⟩
  | succ k ih =>
    intro X hX
    obtain ⟨Y, hY, hYX⟩ := hX
    obtain ⟨W₁, hw₁, hW₁⟩ := ih Y hY
    have hVY : V.mem Y := ((toApproxMap φ).iterMap k).rel_cod hY
    have hVX : V.mem X := (toApproxMap φ).rel_cod hYX
    have hw₂ : φ.mem (step Y X) := toApproxMap_rel.mp hYX
    have hwInter : φ.mem (W₁ ∩ step Y X) := φ.inter_mem hw₁ hw₂
    refine ⟨W₁ ∩ step Y X, hwInter, ?_⟩
    have hg₁g : toApproxMap ((funSpace V V).principal (φ.sub hw₁))
        ≤ toApproxMap ((funSpace V V).principal (φ.sub hwInter)) :=
      (funSpaceEquiv V V).monotone
        (((funSpace V V).principal_le_iff (φ.sub hw₁) (φ.sub hwInter)).mpr Set.
    inter_subset_left)
    have hYg : ((toApproxMap ((funSpace V V).principal (φ.sub hwInter))).iterMap k).
    rel V.master Y :=
      iterMap_mono_map hg₁g k V.master Y hW₁
    have hgYX : (toApproxMap ((funSpace V V).principal (φ.sub hwInter))).rel Y X := by
      show ((funSpace V V).principal (φ.sub hwInter)).mem (step Y X)
      exact ⟨step_mem hVY hVX, Set.inter_subset_right⟩
    exact ⟨Y, hYg, hgYX⟩

end

section
variable {α : Type*} {V : NeighborhoodSystem α}

namespace ApproximableMap

theorem fixElement_le_of_toElementMap_le (f : ApproximableMap V V) {z : V.Element}
    (hz : f.toElementMap z ≤ z) : f.fixElement ≤ z := by
  have key : ∀ n X, (f.iterMap n).rel V.master X → z.mem X := by
    intro n
```

```
    induction n with
    | zero =>
      intro X hn
      obtain ⟨_, hXmem, hmX⟩ := hn
      have hXmaster : X = V.master := Set.Subset.antisymm (V.sub_master hXmem) hmX
      subst hXmaster
      exact z.master_mem
    | succ k ih =>
      intro X hn
      obtain ⟨W, hW, hWX⟩ := hn
      exact hz X ⟨W, ih W hW, hWX⟩
  rintro X ⟨n, hn⟩
  exact key n X hn

end ApproximableMap

open ApproximableMap

theorem fixMap_toElementMap_principal (V : NeighborhoodSystem α)
    {W : Set (ApproximableMap V V)} (hW : (funSpace V V).mem W) :
    (fixMap V).toElementMap ((funSpace V V).principal hW) =
      (toApproxMap ((funSpace V V).principal hW)).fixElement :=
  toElementMap_ofMono_principal _ _ W hW

theorem fixMap_toElementMap (V : NeighborhoodSystem α) (φ : (funSpace V V).Element) :
    (fixMap V).toElementMap φ = (toApproxMap φ).fixElement := by
  apply Element.ext
  intro X
  rw [toElementMap_mem_iff_principal]
  constructor
  · rintro ⟨W, hw, hmem⟩
    rw [fixMap_toElementMap_principal] at hmem
    have hle : (funSpace V V).principal (φ.sub hw) ≤ φ :=
      fun Z hZ => φ.up_mem hw hZ.1 hZ.2
    exact fixElement_mono ((funSpaceEquiv V V).monotone hle) X hmem
  · rintro ⟨n, hn⟩
    obtain ⟨W, hw, hWn⟩ := exists_principal_iterMap V φ n X hn
    refine ⟨W, hw, ?_⟩
    rw [fixMap_toElementMap_principal]
    exact ⟨n, hWn⟩

theorem fixMap_least (V : NeighborhoodSystem α) (φ : (funSpace V V).Element) {z : V.
    Element}
    (hz : (toApproxMap φ).toElementMap z ≤ z) : (fixMap V).toElementMap φ ≤ z := by
  rw [fixMap_toElementMap]
  exact fixElement_le_of_toElementMap_le (toApproxMap φ) hz

theorem fixMap_toElementMap_toFilter (V : NeighborhoodSystem α) (f : ApproximableMap V
     V) :
    (fixMap V).toElementMap (toFilter f) = f.fixElement := by
  rw [fixMap_toElementMap]
  have h : toApproxMap (toFilter f) = f := by
    have he := (funSpaceEquiv V V).apply_symm_apply f
    rwa [funSpaceEquiv_apply, funSpaceEquiv_symm_apply] at he
  rw [h]
```

```
end

section
variable {α : Type*} {V : NeighborhoodSystem α}

namespace ApproximableMap

theorem iterElem_eq_iterate (f : ApproximableMap V V) (n : ℕ) :
    f.iterElem n = (f.toElementMap)^[n] V.bot := by
  induction n with
  | zero =>
    show (f.iterMap 0).toElementMap V.bot = V.bot
    exact toElementMap_idMap V.bot
  | succ k ih =>
    have hstep : f.iterElem (k + 1) = f.toElementMap (f.iterElem k) := by
      show (f.comp (f.iterMap k)).toElementMap V.bot
          = f.toElementMap ((f.iterMap k).toElementMap V.bot)
      rw [toElementMap_comp]
    rw [hstep, ih, Function.iterate_succ', Function.comp_apply]

theorem mem_iterElem (f : ApproximableMap V V) (n : ℕ) {X : Set α} :
    (f.iterElem n).mem X ↔ (f.iterMap n).rel V.master X := by
  constructor
  · rintro ⟨W, hW, hWX⟩
    rw [mem_bot] at hW; subst hW; exact hWX
  · intro h; exact ⟨V.master, by rw [mem_bot], h⟩

theorem iterElem_mono (f : ApproximableMap V V) {n m : ℕ} (hnm : n ≤ m) :
    f.iterElem n ≤ f.iterElem m := by
  intro X hX
  rw [mem_iterElem] at hX ⊢
  exact rel_master_mono f hnm hX

theorem fixElement_eq_iSupDirected (f : ApproximableMap V V) :
    f.fixElement =
      NeighborhoodSystem.iSupDirected (f.iterElem)
        (fun i j => ⟨max i j, iterElem_mono f (le_max_left i j),
          iterElem_mono f (le_max_right i j)⟩) := by
  apply Element.ext
  intro X
  rw [NeighborhoodSystem.mem_iSupDirected]
  constructor
  · rintro ⟨n, hn⟩; exact ⟨n, (mem_iterElem f n).mpr hn⟩
  · rintro ⟨n, hn⟩; exact ⟨n, (mem_iterElem f n).mp hn⟩

end ApproximableMap

open ApproximableMap

theorem fixMap_eq_iSup (V : NeighborhoodSystem α) (φ : (funSpace V V).Element) :
    (fixMap V).toElementMap φ =
      NeighborhoodSystem.iSupDirected ((toApproxMap φ).iterElem)
        (fun i j => ⟨max i j, iterElem_mono _ (le_max_left i j),
          iterElem_mono _ (le_max_right i j)⟩) := by
  rw [fixMap_toElementMap]
  exact fixElement_eq_iSupDirected (toApproxMap φ)
```

```
end

section
variable {α : Type*} {V : NeighborhoodSystem α}

namespace ApproximableMap

theorem toElementMap_fixElement (f : ApproximableMap V V) :
    f.toElementMap f.fixElement = f.fixElement := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨X, ⟨n, hn⟩, hXY⟩
    exact ⟨n + 1, ⟨X, hn, hXY⟩⟩
  · rintro ⟨n, hn⟩
    cases n with
    | zero =>
      obtain ⟨_, hYmem, hmY⟩ := hn
      have hYmaster : Y = V.master := Set.Subset.antisymm (V.sub_master hYmem) hmY
      subst hYmaster
      exact ⟨V.master, f.fixElement.master_mem, f.master_rel⟩
    | succ k =>
      obtain ⟨Z, hZ, hZY⟩ := hn
      exact ⟨Z, ⟨k, hZ⟩, hZY⟩

end ApproximableMap
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.ApproximableMap
section
set_option linter.unusedVariables false

theorem theorem_41.{u_1} : And
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
    {z : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
    @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
    α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f z)
    z →
      @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
    α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f) z)
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
```

```
    (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V),
    @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f)) :=
  @And.intro
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
    {z : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
    @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f z)
    z →
      @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f) z)
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V),
    @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
  @DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement_le_of_toElementMap_le
  @DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap_fixElement
end

end DomainTheory.NeighbourhoodSystems.ApproximableMap
end
```

3.5.4 Example 4.3 — partial functions on integers

EXAMPLE 4.3. The infinite generalization of our original example 1.2 is the system

$$N = \{\{n\} \mid n \in \mathbf{N}\} \cup \{\mathbf{N}\}.$$

The total elements are clearly in a one-one correspondence with the integers in $\mathbf{N}$. We can apply the construction of Exercise 3.16 to obtain a domain

$$F = N^{\infty}.$$

So we already know quite a bit about this domain — but it has a much more familiar presentation.

Let Φ be the set of all *finite partial functions* $\varphi \subseteq \mathbf{N} \times \mathbf{N}$ (that is, finite sets of ordered pairs of integers where, if $(n, m) \in \varphi$ and $(n, m') \in \varphi$, then $m = m'$). Define

$$\uparrow \varphi = \{\psi \in \Phi \mid \varphi \subseteq \psi\}.$$

Consider the neighbourhood system

$$F' = \{\uparrow \varphi \mid \varphi \in \Phi\}.$$

It is an easy exercise to show that F and F' are isomorphic and that the elements of these domains correspond exactly to the (possibly infinite) *partial functions* $\pi \subseteq \mathbf{N} \times \mathbf{N}$. Moreover, the *total* elements just correspond to the *total* functions $\tau : \mathbf{N} \to \mathbf{N}$ ("function" in the ordinary, set-theoretical sense of the word).

Another easy exercise is to show that the domains

$$F \text{ and } (\mathbf{N} \to \mathbf{N})$$

by our definitions are *NOT* isomorphic; though the two domains are closely related. We can define a mapping

$$\text{val} : F \times N \to N$$

by the relationship

$$\uparrow \phi \cup \{n\} \text{ val } \{m\} \quad \text{iff} \quad (n, m) \in \phi.$$

(Of course val has to relate other neighbourhoods such as:

$$\uparrow \phi \cup N \text{ val } N,$$

but these are all.) It is then simple to prove that if $\pi \in |F|$ is regarded as a partial function $\pi : N \to N$ and if for $n \in N$ we define $\hat{n} \in |N|$ by

$$\hat{n} = \{\{n\}, N\},$$

then we have

$$\text{val}(\pi, \hat{n}) = \widehat{\pi(n)}, \text{ if } \pi \text{ is defined at } n;$$

$$= \{N\}, \text{ otherwise.}$$

(Remember that $\{N\} \in |N|$ is the "undefined" element.) This means that

$$\text{curry}(\text{val}) : F \to (N \to N)$$

is a one-one function on elements. (The rather slight trouble with $(N \to N)$ is that it has *more* elements than F.)

So much for the construction of F, we now wish to consider mappings

$$f : F \to F$$

and their uses. Consider the possibility

$$f(\pi)(n) = 0, \qquad \text{if } n = 0;$$

$$= \pi(n-1) + n - 1, \text{ if } n > 0.$$

If π were a total function, then $f(\pi)$ would be total. But if π is partial, and if it is, say, undefined at k, then $f(\pi)$ becomes undefined at $k+1$. Note that $f(\pi)$ is always defined at 0. Note, too, that f is an approximable mapping because it is completely determined by what it does to finite (partial) functions. Indeed,

$$f(\pi) = \bigcup\{f(\phi) \mid \phi \subseteq \pi\},$$

where ϕ ranges over Φ.

Well, we have proved that every approximable map of a domain into itself has a (*least*) fixed point. What is the least fixed point of this f? Suppose $\sigma = f(\sigma)$. Then $\sigma(0) = 0$, and

$$\sigma(n+1) = f(\sigma)(n+1)$$

$$= \sigma(n) + n.$$

By induction, then

$$\sigma(n) = \sum_{i<n} i$$

and σ is a total function. (Therefore, f has a *unique* fixed point.)

Actually, we can make the procedure more systematic by defining as fixed points elements of $(N \to N)$ rather than F. In the first place we have $\hat{0} \in |N|$, and from now on we will not distinguish between n and $\hat{n}$. Next we have two mappings:

$$\text{succ}, \text{pred} : N \to N$$

where, as approximable mappings we have

$$X \text{ succ } Y \text{ iff } \exists n \in N.\ n \in X \text{ and } n+1 \in Y,$$

$$X \text{ pred } Y \text{ iff } \exists n \in N.\ n+1 \in X \text{ and } n \in Y,$$

for all $X, Y \in N$. This is *correct*, but what we mean in more understandable terms is:

$$\text{succ}(n) = n + 1;$$

$$\text{pred}(n) = n - 1, \text{ if } n > 0;$$

$$= \bot, \text{ if } n = 0.$$

Here, n has been identified with $\hat{n} \in |N|$ and $\bot = \{N\} \in |N|$. Moreover, we have a mapping

$$\text{zero} : N \to T$$

which is such that

$$\mathrm{zero}(n) = \text{true, if } n = 0;$$

$$= \text{false, if } n > 0.$$

The *structured domain*

$$\langle N, 0, \mathrm{succ}, \mathrm{pred}, \mathrm{zero}\rangle$$

can be called "THE domain of integers" for our present theory. We shall meet many other structured domains in the sequel.

Now the iterated summation function σ can be completely characterized — as a map $\sigma : N \to N$ rather than as an element $\sigma \in |F|$ — by the following equation:

$$\sigma(n) = \mathrm{cond}(\mathrm{zero}(n),\ 0,\ \sigma(\mathrm{pred}(n)) + \mathrm{pred}(n)).$$

The only problem is that we have not defined $+ : N \times N \to N$. (A direct definition is left to the reader; general remarks are given later.) But $+$ could be any function of two variables in order to make the point about the form of the definition of σ. Remember

$$\mathrm{cond} : T \times N \times N \to N,$$

as defined in Exercise 3.26. We do not put cond in as part of the structure of N because (as should be clear from 3.26) it is part of the structure of T.

The above equation for σ is properly called a *functional equation*; it will be written as a fixed-point equation in Lecture V when we have the notation for the λ-calculus. □

Example_4_3.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Example_2_3

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Example43
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap

section

def memN (X : Set ℕ) : Prop := X = Set.univ ∨ ∃ n, X = {n}
end

section
theorem memN_singleton (n : ℕ) : memN ({n} : Set ℕ) := Or.inr ⟨n, rfl⟩
end

section
theorem memN_univ : memN (Set.univ : Set ℕ) := Or.inl rfl
end
```

```
section

theorem nestedOrDisjoint : NestedOrDisjoint memN := by
  rintro X Y (rfl | ⟨n, rfl⟩) (rfl | ⟨m, rfl⟩)
  · exact Or.inl (Set.Subset.refl _)
  · exact Or.inr (Or.inl (Set.subset_univ _))
  · exact Or.inl (Set.subset_univ _)
  · by_cases h : n = m
    · subst h; exact Or.inl (Set.Subset.refl _)
    · refine Or.inr (Or.inr ?_)
      ext k
      simp only [Set.mem_inter_iff, Set.mem_singleton_iff, Set.mem_empty_iff_false,
    iff_false,
        not_and]
      rintro rfl hkm
      exact h hkm
end

end DomainTheory.NeighbourhoodSystems.Example43

section
namespace DomainTheory.NeighbourhoodSystems.Example43
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap
section

abbrev N : NeighborhoodSystem ℕ :=
  NeighborhoodSystem.ofNestedOrDisjoint memN Set.univ Set.univ_nonempty memN_univ
    nestedOrDisjoint
    (fun _ => Set.subset_univ _)
end

section
@[simp] theorem N_mem {X : Set ℕ} : N.mem X ↔ memN X := Iff.rfl
end

section
@[simp] theorem N_master : N.master = (Set.univ : Set ℕ) := rfl
end

section

abbrev T : NeighborhoodSystem Example12.Token := Example23.T
end

section

def natElem (n : ℕ) : N.Element := N.principal (N_mem.mpr (memN_singleton n))
end

section

def predVal : ℕ → N.Element
  | 0 => N.bot
  | (k + 1) => natElem k
end
```

```
section

theorem singleton_nat_inj {n m : ℕ} (h : ({n} : Set ℕ) = {m}) : n = m := by
  have h1 : n ∈ ({n} : Set ℕ) := rfl
  rw [h] at h1
  exact h1
end

section

theorem univ_ne_singleton (n : ℕ) : (Set.univ : Set ℕ) = {n} := by
  intro h
  have h1 : (n + 1) ∈ ({n} : Set ℕ) := h ▸ Set.mem_univ (n + 1)
  exact Nat.succ_ne_self n h1
end

section

theorem singleton_ne_univ (n : ℕ) : ({n} : Set ℕ) = Set.univ := fun h =>
    univ_ne_singleton n h.symm
end

section

def constLiftN {β : Type*} (V : NeighborhoodSystem β) (val : ℕ → V.Element) :
    ApproximableMap N V where
  rel X Y := (X = Set.univ ∧ Y = V.master) ∨ (∃ n, X = {n} ∧ (val n).mem Y)
  rel_dom := by
    rintro X Y (⟨rfl, _⟩ | ⟨n, rfl, _⟩)
    · exact memN_univ
    · exact memN_singleton n
  rel_cod := by
    rintro X Y (⟨_, rfl⟩ | ⟨n, _, hY⟩)
    · exact V.master_mem
    · exact (val n).sub hY
  master_rel := Or.inl ⟨rfl, rfl⟩
  inter_right := by
    rintro X Y Y' (⟨rfl, rfl⟩ | ⟨n, rfl, hY⟩) hc'
    · rcases hc' with ⟨_, rfl⟩ | ⟨n, hX, _⟩
      · exact Or.inl ⟨rfl, by rw [Set.inter_self]⟩
      · exact (univ_ne_singleton n hX).elim
    · rcases hc' with ⟨hX, _⟩ | ⟨n', hX', hY'⟩
      · exact (singleton_ne_univ n hX).elim
      · have hnn' : n = n' := singleton_nat_inj hX'
        subst hnn'
        exact Or.inr ⟨n, rfl, (val n).inter_mem hY hY'⟩
  mono := by
    rintro X X' Y Y' (⟨rfl, rfl⟩ | ⟨n, rfl, hY⟩) hX'X hYY' hX' hY'
    · have hY'master : Y' = V.master := Set.Subset.antisymm (V.sub_master hY') hYY'
      subst hY'master
      rcases hX' with rfl | ⟨k, rfl⟩
      · exact Or.inl ⟨rfl, rfl⟩
      · exact Or.inr ⟨k, rfl, (val k).master_mem⟩
    · rcases hX' with rfl | ⟨k, rfl⟩
      · exact (singleton_ne_univ n (Set.univ_subset_iff.mp hX'X)).elim
      · have hkn : k = n := Set.mem_singleton_iff.mp (Set.singleton_subset_iff.mp hX'X)
```

```
        subst hkn
        exact Or.inr ⟨k, rfl, (val k).up_mem hY hY' hYY'⟩
end

section

def predMap : ApproximableMap N N := constLiftN N predVal
end

section

def succMap : ApproximableMap N N := constLiftN N (fun n => natElem (n + 1))
end

section

def zeroElt : N.Element := natElem 0
end

section

def zeroVal : ℕ → T.Element
  | 0 => Example23.trueElt
  | (_ + 1) => Example23.falseElt
end

section

def zeroMap : ApproximableMap N T := constLiftN T zeroVal
end

section

theorem N_bot_mem {X : Set ℕ} : N.bot.mem X ↔ X = Set.univ := NeighborhoodSystem.
    mem_bot N
end

section

theorem constLiftN_bot {β : Type*} (V : NeighborhoodSystem β) (val : ℕ → V.Element) :
    (constLiftN V val).toElementMap N.bot = V.bot := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨X, hXmem, hrel⟩
    rw [N_bot_mem] at hXmem
    subst hXmem
    rcases hrel with ⟨_, rfl⟩ | ⟨k, hXk, _⟩
    · exact V.mem_bot.mpr rfl
    · exact (univ_ne_singleton k hXk).elim
  · intro hY
    rw [V.mem_bot] at hY
    subst hY
    exact ⟨Set.univ, N_bot_mem.mpr rfl, Or.inl ⟨rfl, rfl⟩⟩
end
```

```
section

theorem mem_natElem_iff {n : ℕ} {Y : Set ℕ} :
    (natElem n).mem Y ↔ Y = Set.univ ∨ Y = {n} := by
  unfold natElem
  rw [mem_principal]
  constructor
  · rintro ⟨hY, hsub⟩
    rcases hY with rfl | ⟨m, rfl⟩
    · exact Or.inl rfl
    · have hnm : n = m := Set.mem_singleton_iff.mp (Set.singleton_subset_iff.mp hsub)
      subst hnm; exact Or.inr rfl
  · rintro (rfl | rfl)
    · exact ⟨memN_univ, Set.subset_univ _⟩
    · exact ⟨memN_singleton n, subset_rfl⟩
end

section

theorem constLiftN_natElem {β : Type*} (V : NeighborhoodSystem β) (val : ℕ → V.
    Element) (n : ℕ) :
    (constLiftN V val).toElementMap (natElem n) = val n := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨X, hXmem, hrel⟩
    rw [mem_natElem_iff] at hXmem
    rcases hrel with ⟨_, rfl⟩ | ⟨k, hXk, hY⟩
    · exact (val n).master_mem
    · rcases hXmem with rfl | rfl
      · exact (univ_ne_singleton k hXk).elim
      · have hnk : n = k := singleton_nat_inj hXk
        subst hnk; exact hY
  · intro hY
    exact ⟨{n}, mem_natElem_iff.mpr (Or.inr rfl), Or.inr ⟨n, rfl, hY⟩⟩
end

section

theorem predMap_bot : predMap.toElementMap N.bot = N.bot :=
  constLiftN_bot N predVal
end

section

theorem predMap_natElem_succ (k : ℕ) : predMap.toElementMap (natElem (k + 1)) =
    natElem k :=
  constLiftN_natElem N predVal (k + 1)
end

section

theorem predMap_natElem_zero : predMap.toElementMap (natElem 0) = N.bot :=
  constLiftN_natElem N predVal 0
end
```

```
section

theorem succMap_bot : succMap.toElementMap N.bot = N.bot :=
  constLiftN_bot N (fun n => natElem (n + 1))
end

section

theorem succMap_natElem (n : ℕ) : succMap.toElementMap (natElem n) = natElem (n + 1)
    :=
  constLiftN_natElem N (fun n => natElem (n + 1)) n
end

section

theorem predMap_succMap_natElem (n : ℕ) :
    predMap.toElementMap (succMap.toElementMap (natElem n)) = natElem n := by
  rw [succMap_natElem, predMap_natElem_succ]
end

section

theorem zeroMap_bot : zeroMap.toElementMap N.bot = T.bot :=
  constLiftN_bot T zeroVal
end

section

theorem zeroMap_natElem_succ (n : ℕ) : zeroMap.toElementMap (natElem (n + 1)) =
    Example23.falseElt :=
  constLiftN_natElem T zeroVal (n + 1)
end

section

theorem zeroMap_natElem_zero : zeroMap.toElementMap (natElem 0) = Example23.trueElt :=
  constLiftN_natElem T zeroVal 0
end

end DomainTheory.NeighbourhoodSystems.Example43
end
```

3.5.5 Example 4.4 — sequence domain

EXAMPLE 4.4. The domain C of finite or infinite binary sequences mentioned in Exercise 2.21 may be regarded as a generalization of N. This can be made plain by saying how we wish to regard C as a structured domain. To do this we should recall what C is as a neighbourhood system. In the first place

$$B = \{\sigma\Sigma^* \mid \sigma \in \Sigma^*\}$$

where $\Sigma = \{0, 1\}$. To form the system C we have

$$C = B \cup \{\{\sigma\} \mid \sigma \in \Sigma^*\}.$$

The total elements of B correspond to *infinite binary sequences*; while the total elements of C to *finite or infinite sequences*. To simplify notation let us write for $\sigma \in \Sigma^*$

$$\sigma =\uparrow \{\sigma\} \quad \text{(a total element);}$$

$$\sigma \perp =\uparrow \sigma\Sigma^* \quad \text{(a partial element).}$$

In other words we identify σ with the corresponding total element in $|C|$.

We wish now to think of C as a structured domain seen as a kind of generalization of N. The empty sequence Λ will play the rôle of $0 \in |N|$; the map succ has two different analogues for C, however. Just as for B we define for $x \in |C|$ and $\sigma \in \Sigma^*$:

$$\sigma x = \{Y \mid \sigma X \subseteq Y \text{ some } X \in x\},$$

where of course now X and Y range over C. It should be checked that $\sigma\tau$ has the right meaning whether we think of $\tau \in \Sigma^*$ or $\tau \in |C|$. The two "successor" mappings we are looking for are

$$x \mapsto 0x \quad \text{and} \quad x \mapsto 1x.$$

All the maps $x \mapsto \sigma x$ can be obtained as compositions of these iterated as many times as needed.

Here are two questions which we now should ask:

What plays the rôle of pred?

The mapping will be called **tail**, and it is characterized by:

$$\mathrm{tail}(0x) = x,$$

$$\mathrm{tail}(1x) = x, \text{ and}$$

$$\mathrm{tail}(\Lambda) =\perp .$$

It is left to the reader to show that **tail** exists as an approximable mapping.

What plays the rôle of zero?

The answer is not unique, because in C there are several distinctions that have to be made; in fact we will define three maps:

$$\mathrm{empty}, \mathrm{zero}, \mathrm{one} : C \to T$$

where the three maps take on truth-values to distinguish various kinds of elements in $|C|$ as follows:

$$\begin{aligned}
\text{empty}\,(\Lambda) &= \text{true},\\
\text{empty}\,(0x) &= \text{false},\\
\text{empty}\,(1x) &= \text{false},\\
\text{zero}\,(\Lambda) &= \text{false}\\
\text{zero}\,(0x) &= \text{true}\\
\text{zero}\,(1x) &= \text{false}\\
\text{one}\,(\Lambda) &= \text{false}\\
\text{one}\,(0x) &= \text{false}\\
\text{one}\,(1x) &= \text{true}.
\end{aligned}$$

Again, it is an exercise to show these are approximable. The structured domain is therefore

$$\langle C, \Lambda, 0, 1, \text{tail}, \text{empty}, \text{zero}, \text{one}\rangle.$$

Note that we have changed the meaning of some of the symbols in passing from N to C. Note too that there is a confusion between 0 as an element and 0 as the map $x \mapsto 0x$. There are just too few symbols! In any case this is only an example and not a philosophy of life, so the reader can be expected not to suffer too much.

An example of a definition of an *element* of $|C|$ by a fixed-point equation is:

$$a = 0\,1\,a.$$

This equation has one and only one solution in $|C|$, the infinite sequence that alternates 0's and 1's. Note that a is also characterized by:

$$a = 0101a.$$

Another element is

$$b = 010\,b,$$

which is quite different from a.

An example of a *map* in $|C \to C|$ has the characterization

$$\begin{aligned}
d(\Lambda) &= \Lambda\\
d(0x) &= 00d(x), \quad \text{and}\\
d(1x) &= 11d(x).
\end{aligned}$$

We can write:

$$\begin{aligned}
d(x) = \text{cond}(&\text{empty}(x),\ \Lambda,\\
&\text{cond}(\text{zero}(x),\ 00d(\text{tail}(x)),\ 11d(\text{tail}(x)))).
\end{aligned}$$

As we shall see in due course, this can be regarded as a fixed-point definition of d.

An example of a map in $|C \times C \to C|$ was suggested in 2.21. We can write:

$$xy = \mathrm{cond}(\mathrm{empty}(x),\, y,\\ \mathrm{cond}(\mathrm{zero}(x),\, 0(\mathrm{tail}(x)\, y),\, 1(\mathrm{tail}(x)\, y))).$$

It should be checked that this equation exactly characterizes the intended mapping. □

The examples we have given with N and C are examples of definitions of functions by *recursion*. The literal meaning of "recursion" is "running backwards", and a look at the equations for our examples will show that the functions are characterized by giving their values either *outright* (e.g. at 0 or at Λ) or at *earlier* arguments (e.g. at $\mathrm{pred}(x)$ or at $\mathrm{tail}(x)$). The reader should keep in mind that a recursive "definition" is not really a definition in the sense of *explicit definition* but rather is a characterization; a theorem has to be proved to show that such functions exist. Now we have a general definition of domain and a general theorem on fixed points and a general construction of function-space domain; THEREFORE, we know that there are solutions to our equations PROVIDED THAT the variables range over elements of a domain and that the other, given functions that appear in the equations are already known to be approximable (continuous). This proviso is very important, and we shall remark on it time after time.

But, as is well known, recursion also can be done over sets like $\mathbf{N}$, and we should examine now the connection between the familiar kind of recursion and what we are doing over domains. Of course, one simple connection is already provided by the way we regard $\mathbf{N}$ as a subset of N. But there are other useful connections that can be employed in a way that may seem more direct.

Example_4_4.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_11
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_1

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Example44
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap ExampleB

section

def memC (X : Set Str) : Prop := (∃ σ, X = cone σ) ∨ (∃ σ, X = {σ})
end

section
theorem memC_cone (σ : Str) : memC (cone σ) := Or.inl ⟨σ, rfl⟩
end

section
theorem memC_singleton (σ : Str) : memC ({σ} : Set Str) := Or.inr ⟨σ, rfl⟩
end

section

theorem prepend_mono (σ : Str) {X X' : Set Str} (h : X' ⊆ X) : prepend σ X' ⊆ prepend
    σ X := by
  rintro w ⟨τ, hτ, rfl⟩
```

```
  exact ⟨τ, h hτ, rfl⟩
end

section

theorem prepend_singleton (σ τ : Str) : prepend σ {τ} = {σ ++ τ} := by
  ext w
  simp only [mem_prepend, Set.mem_singleton_iff]
  constructor
  · rintro ⟨t, rfl, rfl⟩; rfl
  · rintro rfl; exact ⟨τ, rfl, rfl⟩
end

section

theorem singleton_subset_cone {σ τ : Str} : ({τ} : Set Str) ⊆ cone σ ↔ σ <+: τ := by
  rw [Set.singleton_subset_iff, mem_cone]
end

section

theorem singleton_cone_nd (σ τ : Str) :
    ({τ} : Set Str) ⊆ cone σ ∨ cone σ ⊆ {τ} ∨ ({τ} : Set Str) ∩ cone σ = ∅ := by
  by_cases h : σ <+: τ
  · exact Or.inl (singleton_subset_cone.mpr h)
  · refine Or.inr (Or.inr ?_)
    ext w
    simp only [Set.mem_inter_iff, Set.mem_singleton_iff, mem_cone, Set.
    mem_empty_iff_false,
      iff_false, not_and]
    rintro rfl hτ
    exact h hτ
end

section

theorem nestedOrDisjoint : NestedOrDisjoint memC := by
  rintro X Y (⟨σ, rfl⟩ | ⟨σ, rfl⟩) (⟨τ, rfl⟩ | ⟨τ, rfl⟩)
  · exact cone_trichotomy σ τ
  · rcases singleton_cone_nd σ τ with h | h | h
    · exact Or.inr (Or.inl h)
    · exact Or.inl h
    · exact Or.inr (Or.inr (by rw [Set.inter_comm]; exact h))
  · rcases singleton_cone_nd τ σ with h | h | h
    · exact Or.inl h
    · exact Or.inr (Or.inl h)
    · exact Or.inr (Or.inr h)
  · by_cases h : σ = τ
    · subst h; exact Or.inl (Set.Subset.refl _)
    · refine Or.inr (Or.inr ?_)
      ext w
      simp only [Set.mem_inter_iff, Set.mem_singleton_iff, Set.mem_empty_iff_false,
    iff_false,
        not_and]
      rintro rfl h2
      exact h h2
```

```
end

end DomainTheory.NeighbourhoodSystems.Example44

section
namespace DomainTheory.NeighbourhoodSystems.Example44
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap ExampleB
section

abbrev C : NeighborhoodSystem Str :=
  NeighborhoodSystem.ofNestedOrDisjoint memC Set.univ
    ⟨[], Set.mem_univ _⟩ (Or.inl ⟨[], cone_nil.symm⟩) nestedOrDisjoint
    (fun _ => Set.subset_univ _)
end

section
@[simp] theorem C_mem {X : Set Str} : C.mem X ↔ memC X := Iff.rfl
end

section
@[simp] theorem C_master : C.master = (Set.univ : Set Str) := rfl
end

section

theorem memC_prepend (σ : Str) {X : Set Str} (hX : memC X) : memC (prepend σ X) := by
  rcases hX with ⟨?, rfl⟩ | ⟨?, rfl⟩
  · exact Or.inl ⟨σ ++ ?, prepend_cone σ ?⟩
  · exact Or.inr ⟨σ ++ ?, prepend_singleton σ ?⟩
end

section

def consMap (b : Bool) : ApproximableMap C C where
  rel X Y := memC X ∧ memC Y ∧ prepend [b] X ⊆ Y
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := by
    refine ⟨Or.inl ⟨[], cone_nil.symm⟩, Or.inl ⟨[], cone_nil.symm⟩, ?_⟩
    exact Set.subset_univ _
  inter_right := by
    rintro X Y Y' ⟨hX, hY, hsub⟩ ⟨_, hY', hsub'⟩
    have hsubInter : prepend [b] X ⊆ Y ∩ Y' := Set.subset_inter hsub hsub'
    have hZ : memC (prepend [b] X) := memC_prepend [b] hX
    exact ⟨hX, C.inter_mem hY hY' hZ hsubInter, hsubInter⟩
  mono := by
    rintro X X' Y Y' ⟨hX, hY, hsub⟩ hX'X hYY' hX' hY'
    exact ⟨hX', hY', (prepend_mono [b] hX'X).trans (hsub.trans hYY')⟩
end

section

def altElt : C.Element := ((consMap false).comp (consMap true)).fixElement
end

section
```

```
def strBot (σ : Str) : C.Element := C.principal (C_mem.mpr (memC_cone σ))
end

section

def strElem (σ : Str) : C.Element := C.principal (C_mem.mpr (memC_singleton σ))
end

section

theorem altElt_eq : (consMap false).toElementMap ((consMap true).toElementMap altElt)
    = altElt := by
  have h := toElementMap_fixElement ((consMap false).comp (consMap true))
  rwa [toElementMap_comp] at h
end

section

theorem consMap_strBot (b : Bool) (σ : Str) :
    (consMap b).toElementMap (strBot σ) = strBot (b :: σ) := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨X', ⟨_, hXX'⟩, _, hY, hsub⟩
    refine ⟨hY, ?_⟩
    have hpre : prepend [b] (cone σ) ⊆ Y := (prepend_mono [b] hXX').trans hsub
    rwa [prepend_cone] at hpre
  · rintro ⟨hY, hsub⟩
    refine ⟨cone σ, ⟨memC_cone σ, subset_rfl⟩, memC_cone σ, hY, ?_⟩
    rw [prepend_cone]; exact hsub
end

section

theorem consMap_strElem (b : Bool) (σ : Str) :
    (consMap b).toElementMap (strElem σ) = strElem (b :: σ) := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨X', ⟨_, hXX'⟩, _, hY, hsub⟩
    refine ⟨hY, ?_⟩
    have hpre : prepend [b] {σ} ⊆ Y := (prepend_mono [b] hXX').trans hsub
    rwa [prepend_singleton] at hpre
  · rintro ⟨hY, hsub⟩
    refine ⟨{σ}, ⟨memC_singleton σ, subset_rfl⟩, memC_singleton σ, hY, ?_⟩
    rw [prepend_singleton]; exact hsub
end

section

theorem prepend_subset_self : True := trivial
end

end DomainTheory.NeighbourhoodSystems.Example44
namespace DomainTheory.NeighbourhoodSystems
```

```
open NeighborhoodSystem ApproximableMap

section
variable {α : Type*} {V : NeighborhoodSystem α}

namespace ApproximableMap

def iterFrom (f : ApproximableMap V V) (a : V.Element) (n : ℕ) : V.Element :=
  (f.toElementMap)^[n] a

@[simp] theorem iterFrom_zero (f : ApproximableMap V V) (a : V.Element) :
    f.iterFrom a 0 = a := rfl

theorem iterFrom_succ (f : ApproximableMap V V) (a : V.Element) (n : ℕ) :
    f.iterFrom a (n + 1) = f.toElementMap (f.iterFrom a n) := by
  rw [iterFrom, iterFrom, Function.iterate_succ', Function.comp_apply]

theorem iterFrom_step (f : ApproximableMap V V) {a : V.Element} (ha : a ≤ f.
    toElementMap a)
    (n : ℕ) : f.iterFrom a n ≤ f.iterFrom a (n + 1) := by
  induction n with
  | zero => rw [iterFrom_succ f a 0, iterFrom_zero]; exact ha
  | succ k ih =>
    rw [iterFrom_succ f a k, iterFrom_succ f a (k + 1)]
    exact f.toElementMap_mono ih

theorem iterFrom_mono (f : ApproximableMap V V) {a : V.Element} (ha : a ≤ f.
    toElementMap a)
    {n m : ℕ} (hnm : n ≤ m) : f.iterFrom a n ≤ f.iterFrom a m := by
  induction hnm with
  | refl => exact le_refl _
  | step _ ih => exact le_trans ih (iterFrom_step f ha _)

def fixAbove (f : ApproximableMap V V) {a : V.Element} (ha : a ≤ f.toElementMap a) : V
    .Element :=
  NeighborhoodSystem.iSupDirected (f.iterFrom a)
    (fun i j => ⟨max i j, iterFrom_mono f ha (le_max_left i j),
      iterFrom_mono f ha (le_max_right i j)⟩)

end ApproximableMap
end
end DomainTheory.NeighbourhoodSystems
end
```

3.5.6 Definition 4.5 — Peano axioms

DEFINITION 4.5. A structured set $\langle \mathbf{N}, 0, {}^{+} \rangle$, where $0 \in \mathbf{N}$ and ${}^{+} : \mathbf{N} \to \mathbf{N}$ is a unary function, is said to be a *model for Peano's Axioms* if the following conditions are satisfied:

(i) $0 \neq n^{+}$, for all $n \in \mathbf{N}$;

(ii) $n^{+} = m^{+}$ implies $n = m$, for all $n, m \in \mathbf{N}$;

(iii) whenever $x \subseteq \mathbf{N}$ and $0 \in x$ and $x^{+} \subseteq x$, then $x = \mathbf{N}$.

Here $x^+ = \{n^+ \mid n \in x\}$. □

Clause (iii) is recognized as the principle of mathematical induction stated in terms of sets. We usually think of $\mathbf{N}$ as being "God given", and (i)–(iii) as known without question. Suppose God, however, decides to withdraw His set of integers and substitute another. We can ask: "Oh! Why did You take from us our beloved numbers? Why must we now live with these strange new beasts?" God will probably reply "Trust Me!" Perhaps we should in view of the theorem:

Definition_4_5.lean

```
module

public import Mathlib.Tactic.Attr.Core
public import Aesop.BuiltinRules
public import Mathlib.Basic.ExistsUnique
public import Mathlib.Data.Set.Defs

@[expose] public section

section
universe u
namespace DomainTheory.NeighbourhoodSystems

structure PeanoModel (N : Type u) where

  zero : N

  succ : N → N

  zero_ne_succ : ∀ n, zero = succ n

  succ_injective : Function.Injective succ

  induction : ∀ (s : Set N), zero ∈ s → (∀ n ∈ s, succ n ∈ s) → ∀ n, n ∈ s

end DomainTheory.NeighbourhoodSystems
end

section
namespace DomainTheory.NeighbourhoodSystems
section
universe u v

namespace PeanoModel

variable {M : Type u} {N : Type v}

inductive Graph (P : PeanoModel M) (Q : PeanoModel N) : M → N → Prop
  | base : Graph P Q P.zero Q.zero
  | step : ∀ {m n}, Graph P Q m n → Graph P Q (P.succ m) (Q.succ n)

theorem Graph.swap {P : PeanoModel M} {Q : PeanoModel N} {m : M} {n : N}
    (h : Graph P Q m n) : Graph Q P n m := by
  induction h with
  | base => exact Graph.base
  | step _ ih => exact Graph.step ih
```

```
theorem graph_succ_right (P : PeanoModel M) (Q : PeanoModel N) {m : M} {k : N}
    (h : Graph P Q (P.succ m) k) : ∃ n, Graph P Q m n ∧ k = Q.succ n := by
  generalize hz : P.succ m = z at h
  cases h with
  | base => exact absurd hz.symm (P.zero_ne_succ _)
  | step h' =>
    rename_i m0 n0
    have hm : m = m0 := P.succ_injective hz
    subst hm
    exact ⟨n0, h', rfl⟩

theorem graph_zero_right (P : PeanoModel M) (Q : PeanoModel N) {k : N}
    (h : Graph P Q P.zero k) : k = Q.zero := by
  generalize hz : P.zero = z at h
  cases h with
  | base => rfl
  | step _ => exact absurd hz (P.zero_ne_succ _)

theorem exists_unique_right (P : PeanoModel M) (Q : PeanoModel N) (m : M) :
    ∃! n, Graph P Q m n := by
  refine P.induction {m | ∃! n, Graph P Q m n} ?_ ?_ m
  · exact ⟨Q.zero, Graph.base, fun k hk => graph_zero_right P Q hk⟩
  · rintro m' ⟨n', hn', huniq⟩
    refine ⟨Q.succ n', Graph.step hn', fun k hk => ?_⟩
    obtain ⟨n'', hn'', rfl⟩ := graph_succ_right P Q hk
    rw [huniq n'' hn'']

theorem exists_unique_left (P : PeanoModel M) (Q : PeanoModel N) (n : N) :
    ∃! m, Graph P Q m n := by
  obtain ⟨m, hm, huniq⟩ := exists_unique_right Q P n
  exact ⟨m, hm.swap, fun y hy => huniq y hy.swap⟩

end PeanoModel
end
end DomainTheory.NeighbourhoodSystems
end
```

3.5.7 Theorem 4.6 — Peano models isomorphic

THEOREM 4.6. All models of Peano's Axioms are isomorphic.

Proof: There are several ways to give the proof, but, for the sake of illustration, an application of the fixed-point theorem is appropriate here. Let $\langle \mathbf{N}, 0, {}^{+} \rangle$ be one model, and let $\langle \mathbf{M}, \Box, {}^{\#} \rangle$ be another. Let $\mathbf{N} \times \mathbf{M}$ be the ordinary cartesian product of the two sets and let

$$P(\mathbf{N} \times \mathbf{M})$$

be the powerset (set of all subsets) of $\mathbf{N} \times \mathbf{N}$. As in Exercises 1.15 and 2.20, we regard this set of elements as a domain, whose finite elements are just the finite subsets of the given set $\mathbf{N} \times \mathbf{M}$. The following mapping on $u \subseteq \mathbf{N} \times \mathbf{M}$ is easily proved approximable:

$$u \mapsto \{(0, \Box)\} \cup \{(n^{+}, m^{\#}) \mid (n, m) \in u\}.$$

(This assertion should be checked as an exercise.) We thus let r be the (least) fixed point:

$$r = \{(0, \Box)\} \cup \{(n^+, m^\#) \mid (n, m) \in r\}.$$

This $r \subseteq \mathbf{N} \times \mathbf{M}$ as a binary relation will turn out to be a one-one correspondence giving the required isomorphism.

First of all we see by construction that

(i) $0\ r\ \Box$;

(ii) $n\ r\ m$ implies $n^+\ r\ m^\#$.

So, if r proves to be a one-one correspondence, it will then be the desired isomorphism. Now, the two sets shown in the equation

$$\{(0, \Box)\} \cap \{(n^+, m^\#) \mid (n, m) \in r\} = \emptyset$$

are disjoint by virtue of axiom 4.5(i). Therefore, 0 in $\mathbf{N}$ corresponds by r to one and only one element of $\mathbf{M}$, namely the element $\Box$. Let $x \subseteq \mathbf{N}$ be the set of all elements of $\mathbf{N}$ corresponding by r to a unique element of $\mathbf{M}$. We have just shown $0 \in x$. Suppose $n \in x$, and let $m \in \mathbf{M}$ be the unique element with $n\ r\ m$. Now $n^+\ r\ m^\#$ holds, so n^+ corresponds to at least one element of $\mathbf{M}$. If $n^+\ r\ k$ also holds, then since $(n^+, k) \neq (0, \Box)$, the fixed-point equation implies

$$n^+ = n_0^+ \quad \text{and} \quad k = m_0^\#$$

for some $(n_0, m_0) \in r$. By axiom 4.5(ii), $n = n_0$, and, by uniqueness (remember $n \in x$), $m = m_0$; thus, $m^\#$ is the unique correspondent for n^+. We have proved $n^+ \in x$. Therefore, $x^+ \subseteq x$; so by axiom 4.5(iii), $x = \mathbf{N}$ holds. Otherwise said, every element in $\mathbf{N}$ corresponds to a unique element of $\mathbf{M}$.

Note that the rôles of $\mathbf{N}$ and $\mathbf{M}$ are completely symmetric, *and* they satisfy the same axioms as structured sets. It follows, then, that every element of $\mathbf{M}$ corresponds to a unique element of $\mathbf{N}$. The proof that r is a one-one correspondence is now complete. $\Box$

Theorem_4_6.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Definition_4_5

public import Mathlib.Algebra.Group.End

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
universe u v
namespace PeanoModel
variable {M : Type u} {N : Type v}

theorem peano_models_isomorphic (P : PeanoModel M) (Q : PeanoModel N) :
    ∃ e : M ≃ N, e P.zero = Q.zero ∧ ∀ m, e (P.succ m) = Q.succ (e m) := by
  classical
```

```
  refine ⟨⟨fun m => (exists_unique_right P Q m).choose,
          fun n => (exists_unique_left P Q n).choose, ?_, ?_⟩, ?_, ?_⟩
  .
    intro m
    have hf : Graph P Q m (exists_unique_right P Q m).choose :=
      (exists_unique_right P Q m).choose_spec.1
    exact ((exists_unique_left P Q _).choose_spec.2 m hf).symm
  .
    intro n
    have hg : Graph P Q (exists_unique_left P Q n).choose n :=
      (exists_unique_left P Q n).choose_spec.1
    exact ((exists_unique_right P Q _).choose_spec.2 n hg).symm
  .
    exact ((exists_unique_right P Q P.zero).choose_spec.2 Q.zero Graph.base).symm
  .
    intro m
    have hf : Graph P Q m (exists_unique_right P Q m).choose :=
      (exists_unique_right P Q m).choose_spec.1
    exact ((exists_unique_right P Q (P.succ m)).choose_spec.2 _ (Graph.step hf)).symm

end PeanoModel
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.PeanoModel
section
set_option linter.unusedVariables false

theorem theorem_46.{u, v} : ∀ {M : Type u} {N : Type v} (P : DomainTheory.
    NeighbourhoodSystems.PeanoModel M)
  (Q : DomainTheory.NeighbourhoodSystems.PeanoModel N),
  ∃ (e : Equiv M N),
    And
      (@Eq N
        (@DFunLike.coe (Equiv M N) M (fun (x : M) => N)
          (@EquivLike.toFunLike (Equiv M N) M N (@Equiv.instEquivLike M N)) e
          (@DomainTheory.NeighbourhoodSystems.PeanoModel.zero M P))
        (@DomainTheory.NeighbourhoodSystems.PeanoModel.zero N Q))
      (∀ (m : M),
        @Eq N
          (@DFunLike.coe (Equiv M N) M (fun (x : M) => N)
            (@EquivLike.toFunLike (Equiv M N) M N (@Equiv.instEquivLike M N)) e
            (@DomainTheory.NeighbourhoodSystems.PeanoModel.succ M P m))
          (@DomainTheory.NeighbourhoodSystems.PeanoModel.succ N Q
            (@DFunLike.coe (Equiv M N) M (fun (x : M) => N)
              (@EquivLike.toFunLike (Equiv M N) M N (@Equiv.instEquivLike M N)) e m)))
    :=
  @DomainTheory.NeighbourhoodSystems.PeanoModel.peano_models_isomorphic
end

end DomainTheory.NeighbourhoodSystems.PeanoModel
end
```

3.5.8 Lecture IV exercises

EXERCISES

3.5.9 Exercise 4.7 — fixed point above a seed

Formula 4.2(iii) shows how to find the *least* fixed point of $f : D \to D$. Suppose on the other hand that $a \in |D|$ is such that $a \subseteq f(a)$. Will there be a fixed point $x = f(x)$ with $a \subseteq x$?

(Hint: How do we know $\bigsqcup_{n=0}^{\infty} f^n(\bot) \in |D|$?)

Exercise_4_7.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Example_4_4

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2
public import Mathlib.Tactic.Ring

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α : Type*} {V : NeighborhoodSystem α}
namespace ApproximableMap

theorem fixAbove_isFixed (f : ApproximableMap V V) {a : V.Element} (ha : a ≤ f.
    toElementMap a) :
    f.toElementMap (f.fixAbove ha) = f.fixAbove ha := by
  set hdir := (fun i j => ⟨max i j, iterFrom_mono f ha (le_max_left i j),
    iterFrom_mono f ha (le_max_right i j)⟩ :
    ∀ i j, ∃ k, f.iterFrom a i ≤ f.iterFrom a k ∧ f.iterFrom a j ≤ f.iterFrom a k)
    with hdir_def
  apply le_antisymm
  ·
    rw [fixAbove, toElementMap_iSupDirected]
    apply NeighborhoodSystem.iSupDirected_le
    intro n
    have : f.toElementMap (f.iterFrom a n) = f.iterFrom a (n + 1) := (iterFrom_succ f
    a n).symm
    rw [this]
    exact NeighborhoodSystem.le_iSupDirected (f.iterFrom a) hdir (n + 1)
  ·
    apply NeighborhoodSystem.iSupDirected_le
    intro n
    calc f.iterFrom a n
        ≤ f.iterFrom a (n + 1) := iterFrom_mono f ha (Nat.le_succ n)
      _ = f.toElementMap (f.iterFrom a n) := iterFrom_succ f a n
      _ ≤ f.toElementMap (f.fixAbove ha) :=
          f.toElementMap_mono (NeighborhoodSystem.le_iSupDirected (f.iterFrom a) hdir
    n)
```

```
theorem fixAbove_least (f : ApproximableMap V V) {a : V.Element} (ha : a ≤ f.
    toElementMap a)
    {z : V.Element} (haz : a ≤ z) (hz : f.toElementMap z ≤ z) : f.fixAbove ha ≤ z :=
    by
  apply NeighborhoodSystem.iSupDirected_le
  intro n
  induction n with
  | zero => rwa [iterFrom_zero]
  | succ k ih =>
    rw [iterFrom_succ]
    exact le_trans (f.toElementMap_mono ih) hz

end ApproximableMap
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.ApproximableMap
section
set_option linter.unusedVariables false

theorem example_407.{u_1} : And
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
    {a : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V}
    (ha :
      @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
    α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
        a (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f a
    )),
    @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixAbove α V f a ha))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixAbove α V f a ha))
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
    {a : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V}
    (ha :
      @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
    α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
        a (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f a
    ))
    {z : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
    @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
    α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
```

```
  NeighborhoodSystem.Element α V)
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
       a z →
     @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
         (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V)
           (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f z
  ) z →
       @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
         (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V)
           (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixAbove α V f a ha) z)
  :=
@And.intro
(∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
  {a : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V}
  (ha :
    @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   α V)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
       a (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f a
  )),
  @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixAbove α V f a ha))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixAbove α V f a ha))
(∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
  {a : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V}
  (ha :
    @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   α V)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
       a (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f a
  ))
  {z : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
  @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
       (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
```

```
     α V)
           (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
         a z →
       @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
           (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V)
             (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f z
    ) z →
         @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
           (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V)
             (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixAbove α V f a ha) z)
  @DomainTheory.NeighbourhoodSystems.ApproximableMap.fixAbove_isFixed
  @DomainTheory.NeighbourhoodSystems.ApproximableMap.fixAbove_least
end

end DomainTheory.NeighbourhoodSystems.ApproximableMap
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

section
variable {α : Type*} {V : NeighborhoodSystem α}

namespace ApproximableMap

theorem le_fixAbove (f : ApproximableMap V V) {a : V.Element} (ha : a ≤ f.toElementMap
     a) :
    a ≤ f.fixAbove ha := by
  have := NeighborhoodSystem.le_iSupDirected (f.iterFrom a)
    (fun i j => ⟨max i j, iterFrom_mono f ha (le_max_left i j),
      iterFrom_mono f ha (le_max_right i j)⟩) 0
  rwa [iterFrom_zero] at this

def supChain (s : ℕ → V.Element) (hmono : Monotone s) : V.Element :=
  NeighborhoodSystem.iSupDirected s
    (fun i j => ⟨max i j, hmono (le_max_left i j), hmono (le_max_right i j)⟩)

theorem iterElem_monotone (f : ApproximableMap V V) : Monotone f.iterElem :=
  fun _ _ hab => iterElem_mono f hab

theorem iterElem_succ (f : ApproximableMap V V) (n : ℕ) :
    f.iterElem (n + 1) = f.toElementMap (f.iterElem n) := by
  show (f.comp (f.iterMap n)).toElementMap V.bot
      = f.toElementMap ((f.iterMap n).toElementMap V.bot)
  rw [toElementMap_comp]
```

```
theorem iterElem_zero (f : ApproximableMap V V) : f.iterElem 0 = V.bot :=
  toElementMap_idMap V.bot

theorem comp_self_iterElem (f : ApproximableMap V V) (n : ℕ) :
    (f.comp f).iterElem n = f.iterElem (2 * n) := by
  induction n with
  | zero => rw [iterElem_zero, Nat.mul_zero, iterElem_zero]
  | succ k ih =>
    have h2 : 2 * (k + 1) = 2 * k + 1 + 1 := by ring
    rw [iterElem_succ, ih, toElementMap_comp, h2, iterElem_succ, iterElem_succ]

theorem mem_supChain (s : ℕ → V.Element) (hmono : Monotone s) {Z : Set α} :
    (supChain s hmono).mem Z ↔ ∃ n, (s n).mem Z :=
  NeighborhoodSystem.mem_iSupDirected s _

theorem fixElement_eq_supChain (f : ApproximableMap V V) :
    f.fixElement = supChain f.iterElem (iterElem_monotone f) := by
  apply Element.ext
  intro X
  rw [mem_supChain, mem_fixElement]
  constructor
  · rintro ⟨n, hn⟩; exact ⟨n, (mem_iterElem f n).mpr hn⟩
  · rintro ⟨n, hn⟩; exact ⟨n, (mem_iterElem f n).mp hn⟩

end ApproximableMap
end
end DomainTheory.NeighbourhoodSystems
end
```

3.5.10 Exercise 4.8 — fixed-point induction

Suppose $f : D \to D$ and $S \subseteq |D|$ are such that

(i) $\bot \in S$;

(ii) $x \in S$ always implies $f(x) \in S$;

(iii) whenever $\{x_n\}_{n=0}^{\infty} \subseteq S$ and $x_n \sqsubseteq x_{n+1}$ for all n, then $\bigsqcup_{n=0}^{\infty} x_n \in S$.

Conclude that $\mathrm{fix}(f) \in S$. (This could be called the principle of *fixed-point induction*.) Apply the method to a set of the form

$$S = \{x \in |D| \mid a(x) = b(x)\},$$

where $a, b : D \to D$ are approximable, and where we know $a(\bot) = b(\bot)$, and $f \circ a = a \circ f$ and $f \circ b = b \circ f$.

Exercise_4_8.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
```

```
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_7

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α : Type*} {V : NeighborhoodSystem α}
namespace ApproximableMap

theorem fix_induction (f : ApproximableMap V V) (P : V.Element → Prop)
    (hbot : P V.bot)
    (hstep : ∀ x, P x → P (f.toElementMap x))
    (hsup : ∀ (s : ℕ → V.Element) (hmono : Monotone s), (∀ n, P (s n)) → P (supChain
    s hmono)) :
    P f.fixElement := by
  have hmono : Monotone f.iterElem := iterElem_monotone f
  have hP : ∀ n, P (f.iterElem n) := by
    intro n
    induction n with
    | zero => rw [iterElem_zero]; exact hbot
    | succ k ih => rw [iterElem_succ]; exact hstep _ ih
  rw [fixElement_eq_supChain f]
  exact hsup f.iterElem hmono hP

theorem fix_induction_eq (f a b : ApproximableMap V V)
    (hbot : a.toElementMap V.bot = b.toElementMap V.bot)
    (hfa : f.comp a = a.comp f) (hfb : f.comp b = b.comp f) :
    a.toElementMap f.fixElement = b.toElementMap f.fixElement := by

  have hca : ∀ x, a.toElementMap (f.toElementMap x) = f.toElementMap (a.toElementMap x)
     := by
    intro x
    have h1 : (a.comp f).toElementMap x = (f.comp a).toElementMap x := by rw [hfa]
    rwa [toElementMap_comp, toElementMap_comp] at h1
  have hcb : ∀ x, b.toElementMap (f.toElementMap x) = f.toElementMap (b.toElementMap x)
     := by
    intro x
    have h1 : (b.comp f).toElementMap x = (f.comp b).toElementMap x := by rw [hfb]
    rwa [toElementMap_comp, toElementMap_comp] at h1
  refine fix_induction f (fun x => a.toElementMap x = b.toElementMap x) hbot ?_ ?_
  · intro x hx
    rw [hca, hcb, hx]
  · intro s hmono hs

    show a.toElementMap (supChain s hmono) = b.toElementMap (supChain s hmono)
    rw [supChain, toElementMap_iSupDirected, toElementMap_iSupDirected]
    apply Element.ext
    intro Z
    rw [NeighborhoodSystem.mem_iSupDirected, NeighborhoodSystem.mem_iSupDirected]
    constructor
    · rintro ⟨n, hn⟩; exact ⟨n, by rw [← hs n]; exact hn⟩
    · rintro ⟨n, hn⟩; exact ⟨n, by rw [hs n]; exact hn⟩

end ApproximableMap
```

```
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.ApproximableMap
section
set_option linter.unusedVariables false

theorem example_408.{u_1} : And
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f a b : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V),
    @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V a
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot α V))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V b
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot α V)) →
      @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α α α V V V f a)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α α α V V V a f) →
        @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α α α V V V f b)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α α α V V V b f)
  →
          @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V a
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V b
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f)))
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
    (P : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V → Prop),
    P (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot α V) →
      (∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
          P x → P (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
    V V f x)) →
        (∀ (s : Nat → @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
    V)
            (hmono :
              @Monotone Nat (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V) Nat.instPreorder
                (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V))
                s),
            (∀ (n : Nat), P (s n)) → P (@DomainTheory.NeighbourhoodSystems.
    ApproximableMap.supChain α V s hmono)) →
          P (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f)) :=
  @And.intro
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f a b : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V),
    @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V a
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot α V))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V b
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot α V)) →
      @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
```

```
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α α α V V V f a)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α α α V V V a f) →
        @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α α α V V V f b)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α α α V V V b f)
    →
          @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V a
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V b
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f)))
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
    (P : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V → Prop),
    P (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot α V) →
      (∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
          P x → P (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
     V V f x)) →
        (∀ (s : Nat → @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
    V)
            (hmono :
              @Monotone Nat (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V) Nat.instPreorder
                (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V))
                s),
            (∀ (n : Nat), P (s n)) → P (@DomainTheory.NeighbourhoodSystems.
    ApproximableMap.supChain α V s hmono)) →
          P (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
  @DomainTheory.NeighbourhoodSystems.ApproximableMap.fix_induction_eq
  @DomainTheory.NeighbourhoodSystems.ApproximableMap.fix_induction
end

end DomainTheory.NeighbourhoodSystems.ApproximableMap
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

end DomainTheory.NeighbourhoodSystems
end
```

3.5.11 Exercise 4.9 — fix as a fixed point

Show that there is an approximable operator

$$\Psi : ((D \to D) \to D) \to ((D \to D) \to D)$$

such that for $\theta : (D \to D) \to D$ and $f : D \to D$ we have

$$\Psi(\theta)(f) = f(\theta(f)).$$

Prove further that $\mathrm{fix} : (D \to D) \to D$ is the *least* fixed point of Ψ.

Exercise_4_9.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α : Type*}

def bigPsi (V : NeighborhoodSystem α) :
    ApproximableMap (funSpace (funSpace V V) V) (funSpace (funSpace V V) V) :=
  curry ((evalMap V V).comp
    (paired (proj₁ (funSpace (funSpace V V) V) (funSpace V V)) (evalMap (funSpace V V)
    V)))

theorem bigPsi_apply (V : NeighborhoodSystem α)
    (? : (funSpace (funSpace V V) V).Element) (f : (funSpace V V).Element) :
    (toApproxMap ((bigPsi V).toElementMap ?)).toElementMap f
      = (toApproxMap f).toElementMap ((toApproxMap ?).toElementMap f) := by
  rw [bigPsi, toElementMap_curry_apply, toElementMap_comp, toElementMap_paired,
    toElementMap_proj₁, snd_pair, evalMap_apply, evalMap_apply]

theorem toApproxMap_toFilter_fixMap (V : NeighborhoodSystem α) :
    toApproxMap (toFilter (fixMap V)) = fixMap V := by
  have he := (funSpaceEquiv (funSpace V V) V).apply_symm_apply (fixMap V)
  rwa [funSpaceEquiv_apply, funSpaceEquiv_symm_apply] at he

theorem bigPsi_fix (V : NeighborhoodSystem α) :
    (bigPsi V).toElementMap (toFilter (fixMap V)) = toFilter (fixMap V) := by
  apply (funSpaceEquiv (funSpace V V) V).injective
  rw [funSpaceEquiv_apply, funSpaceEquiv_apply]
  apply ext_of_toElementMap
  intro f
  rw [bigPsi_apply, toApproxMap_toFilter_fixMap, fixMap_toElementMap,
    toElementMap_fixElement]

theorem bigPsi_least (V : NeighborhoodSystem α) (? : (funSpace (funSpace V V) V).
    Element)
    (h? : (bigPsi V).toElementMap ? ≤ ?) : toFilter (fixMap V) ≤ ? := by

  have h?' : toApproxMap ((bigPsi V).toElementMap ?) ≤ toApproxMap ? := by
    rw [← funSpaceEquiv_apply, ← funSpaceEquiv_apply]
    exact (funSpaceEquiv (funSpace V V) V).monotone h?
  have hpre : ∀ f, (toApproxMap f).toElementMap ((toApproxMap ?).toElementMap f)
      ≤ (toApproxMap ?).toElementMap f := by
    intro f
```

```
    have h := (le_iff_toElementMap_le.mp h?') f
    rwa [bigPsi_apply] at h

  apply (funSpaceEquiv (funSpace V V) V).le_iff_le.mp
  rw [funSpaceEquiv_apply, funSpaceEquiv_apply, toApproxMap_toFilter_fixMap,
    le_iff_toElementMap_le]
  intro f
  rw [fixMap_toElementMap]
  exact fixElement_le_of_toElementMap_le (toApproxMap f) (hpre f)

theorem fix_eq_fixElement_bigPsi (V : NeighborhoodSystem α) :
    toFilter (fixMap V) = (bigPsi V).fixElement := by
  apply le_antisymm
  · exact bigPsi_least V _ (le_of_eq (toElementMap_fixElement (bigPsi V)))
  · exact fixElement_le_of_toElementMap_le (bigPsi V) (le_of_eq (bigPsi_fix V))

end

section
set_option linter.unusedVariables false

theorem example_409.{u_1} : And
  (And
    (And
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
        (? :
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
        (f :
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V)),
        @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V
            (@DomainTheory.NeighbourhoodSystems.toApproxMap (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α V V)
              α (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                  (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                  (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
                (@DomainTheory.NeighbourhoodSystems.funSpace
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                  (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
                (@DomainTheory.NeighbourhoodSystems.funSpace
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
```

```
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.bigPsi α V) ?))
        f)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V
        (@DomainTheory.NeighbourhoodSystems.toApproxMap α α V V f)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V
          (@DomainTheory.NeighbourhoodSystems.toApproxMap
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V ?)
          f)))
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.bigPsi α V)
        (@DomainTheory.NeighbourhoodSystems.toFilter (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V (@DomainTheory.
NeighbourhoodSystems.fixMap α V)))
      (@DomainTheory.NeighbourhoodSystems.toFilter (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
        (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V (@DomainTheory.
NeighbourhoodSystems.fixMap α V))))
 (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
   (? :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
        (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
      (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
        (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)),
  @LE.le
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
```

```
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
      (@Preorder.toLE
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
          (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V)
            α (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
        (@PartialOrder.toPreorder
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.funSpace
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.funSpace
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.bigPsi α V) ?)
      ? →
    @LE.le
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
      (@Preorder.toLE
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
```

```
            (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V)
               α (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
           (@PartialOrder.toPreorder
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
               (@DomainTheory.NeighbourhoodSystems.ApproximableMap
                 (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                 (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
               (@DomainTheory.NeighbourhoodSystems.funSpace
                 (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                 (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement
               (@DomainTheory.NeighbourhoodSystems.ApproximableMap
                 (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                 (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
               (@DomainTheory.NeighbourhoodSystems.funSpace
                 (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                 (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))))
         (@DomainTheory.NeighbourhoodSystems.toFilter (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V) α
           (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V (@DomainTheory.
  NeighbourhoodSystems.fixMap α V))
         ?))
(∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
  @Eq
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V)
         α (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
      (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V) α
         (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
    (@DomainTheory.NeighbourhoodSystems.toFilter (@DomainTheory.NeighbourhoodSystems
  .ApproximableMap α α V V) α
      (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V (@DomainTheory.
  NeighbourhoodSystems.fixMap α V))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V)
         α (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
      (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V) α
         (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
      (@DomainTheory.NeighbourhoodSystems.bigPsi α V))) :=
@And.intro
(And
  (And
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
      (? :
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
          (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V) α
```

```
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
    (f :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
        (@DomainTheory.NeighbourhoodSystems.funSpace α α V V)),
    @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
        (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V
        (@DomainTheory.NeighbourhoodSystems.toApproxMap (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V)
          α (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.funSpace
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.funSpace
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.bigPsi α V) ?))
        f)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V
        (@DomainTheory.NeighbourhoodSystems.toApproxMap α α V V f)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V
          (@DomainTheory.NeighbourhoodSystems.toApproxMap
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V ?)
          f)))
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
```

```
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.bigPsi α V)
        (@DomainTheory.NeighbourhoodSystems.toFilter (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V (@DomainTheory.
NeighbourhoodSystems.fixMap α V)))
      (@DomainTheory.NeighbourhoodSystems.toFilter (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
        (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V (@DomainTheory.
NeighbourhoodSystems.fixMap α V))))
(∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
  (? :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
        (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
      (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
        (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)),
  @LE.le
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
      (@Preorder.toLE
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
          (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V)
            α (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
        (@PartialOrder.toPreorder
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.funSpace
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.funSpace
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
```

```
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
          (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
          (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
          (@DomainTheory.NeighbourhoodSystems.bigPsi α V) ?)
        ? →
      @LE.le
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
          (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
        (@Preorder.toLE
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V)
              α (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
          (@PartialOrder.toPreorder
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
              (@DomainTheory.NeighbourhoodSystems.funSpace
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
              (@DomainTheory.NeighbourhoodSystems.funSpace
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))))
          (@DomainTheory.NeighbourhoodSystems.toFilter (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V (@DomainTheory.
  NeighbourhoodSystems.fixMap α V))
          ?))
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V)
          α (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V) α
```

```
       (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
    (@DomainTheory.NeighbourhoodSystems.toFilter (@DomainTheory.NeighbourhoodSystems
  .ApproximableMap α α V V) α
      (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V (@DomainTheory.
  NeighbourhoodSystems.fixMap α V))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V)
        α (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)


      (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V) α
        (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
      (@DomainTheory.NeighbourhoodSystems.bigPsi α V)))
(@And.intro
  (And
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
      (? :
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
          (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
      (f :
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V)),
      @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V
          (@DomainTheory.NeighbourhoodSystems.toApproxMap (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α V V)
            α (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
              (@DomainTheory.NeighbourhoodSystems.funSpace
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
              (@DomainTheory.NeighbourhoodSystems.funSpace
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
              (@DomainTheory.NeighbourhoodSystems.bigPsi α V) ?))
            f)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V
            (@DomainTheory.NeighbourhoodSystems.toApproxMap α α V V f)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V
```

```
          (@DomainTheory.NeighbourhoodSystems.toApproxMap
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V ?)
          f)))
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.bigPsi α V)
        (@DomainTheory.NeighbourhoodSystems.toFilter (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V (@DomainTheory.
NeighbourhoodSystems.fixMap α V)))
      (@DomainTheory.NeighbourhoodSystems.toFilter (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
        (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V (@DomainTheory.
NeighbourhoodSystems.fixMap α V))))
 (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
   (? :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
        (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
      (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
        (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)),
  @LE.le
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
      (@Preorder.toLE
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
```

```
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
          (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V)
            α (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
        (@PartialOrder.toPreorder
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.funSpace
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.funSpace
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.bigPsi α V) ?)
      ? →
    @LE.le
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
        (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
      (@Preorder.toLE
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
          (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V)
            α (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
        (@PartialOrder.toPreorder
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
```

```
            (@DomainTheory.NeighbourhoodSystems.funSpace
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.funSpace
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))))
      (@DomainTheory.NeighbourhoodSystems.toFilter (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
        (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V (@DomainTheory.
NeighbourhoodSystems.fixMap α V))
      ?)
 (@And.intro
   (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
     (? :
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
           (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
         (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V) α
           (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
     (f :
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
         (@DomainTheory.NeighbourhoodSystems.funSpace α α V V)),
     @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
       (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
         (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V
         (@DomainTheory.NeighbourhoodSystems.toApproxMap (@DomainTheory.
NeighbourhoodSystems.ApproximableMap α α V V)
           α (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
             (@DomainTheory.NeighbourhoodSystems.ApproximableMap
               (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
               (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
             (@DomainTheory.NeighbourhoodSystems.ApproximableMap
               (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
               (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
             (@DomainTheory.NeighbourhoodSystems.funSpace
               (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
               (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
             (@DomainTheory.NeighbourhoodSystems.funSpace
               (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
               (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
             (@DomainTheory.NeighbourhoodSystems.bigPsi α V) ?))
         f)
       (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V
         (@DomainTheory.NeighbourhoodSystems.toApproxMap α α V V f)
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
```

```
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V
              (@DomainTheory.NeighbourhoodSystems.toApproxMap
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
                (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V ?)
              f)))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.funSpace (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V)
            (@DomainTheory.NeighbourhoodSystems.bigPsi α V)
            (@DomainTheory.NeighbourhoodSystems.toFilter (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α V V) α
              (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V (@DomainTheory.
    NeighbourhoodSystems.fixMap α V)))
          (@DomainTheory.NeighbourhoodSystems.toFilter (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α V V) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V (@DomainTheory.
    NeighbourhoodSystems.fixMap α V)))
        @DomainTheory.NeighbourhoodSystems.bigPsi_apply @DomainTheory.
    NeighbourhoodSystems.bigPsi_fix)
     @DomainTheory.NeighbourhoodSystems.bigPsi_least)
  @DomainTheory.NeighbourhoodSystems.fix_eq_fixElement_bigPsi
end

end DomainTheory.NeighbourhoodSystems
end
```

3.5.12 Exercise 4.10 — domain above an element

Given a domain D and an element $a \in |D|$, construct a domain D_a where

$$|D_a| = \{x \in |D| \mid x \sqsubseteq a\}.$$

Show that if $f : D \to D$ is approximable, then f can be restricted to an approximable map $f' : D_{\text{fix}(f)} \to D_{\text{fix}(f)}$ where $f'(x) = f(x)$ for all $x \in |D_{\text{fix}(f)}|$. How many fixed points does f' have in $|D_{\text{fix}(f)}|$?

Exercise_4_10.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_1
public import Mathlib.Tactic.Monotonicity.Lemmas
public import Mathlib.Tactic.Bound

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α : Type*} {V : NeighborhoodSystem α}
namespace ApproximableMap

def relSystem (a : V.Element) : NeighborhoodSystem α where
  mem X := a.mem X
  master := V.master
  master_nonempty := V.master_nonempty
  master_mem := a.master_mem
  sub_master := fun hX => V.sub_master (a.sub hX)
  inter_mem := fun hX hY _ _ => a.inter_mem hX hY

@[simp] theorem relSystem_mem (a : V.Element) {X : Set α} :
    (relSystem a).mem X ↔ a.mem X := Iff.rfl

@[simp] theorem relSystem_master (a : V.Element) : (relSystem a).master = V.master :=
    rfl

def embed (a : V.Element) (g : (relSystem a).Element) : V.Element where
  mem X := V.mem X ∧ ∃ W, a.mem W ∧ g.mem W ∧ W ⊆ X
  sub := fun h => h.1
  master_mem := ⟨V.master_mem, V.master, a.master_mem, g.master_mem, subset_rfl⟩
  inter_mem := by
    rintro X Y ⟨hVX, Wx, haWx, hgWx, hWxX⟩ ⟨hVY, Wy, haWy, hgWy, hWyY⟩
    have haWxy : a.mem (Wx ∩ Wy) := a.inter_mem haWx haWy
    have hgWxy : g.mem (Wx ∩ Wy) := g.inter_mem hgWx hgWy
    have hsub : Wx ∩ Wy ⊆ X ∩ Y := Set.inter_subset_inter hWxX hWyY
    refine ⟨V.inter_mem hVX hVY (a.sub haWxy) hsub, Wx ∩ Wy, haWxy, hgWxy, hsub⟩
  up_mem := by
    rintro X Y ⟨hVX, W, haW, hgW, hWX⟩ hVY hXY
    exact ⟨hVY, W, haW, hgW, subset_trans hWX hXY⟩

theorem embed_le (a : V.Element) (g : (relSystem a).Element) : embed a g ≤ a := by
  rintro X ⟨hVX, W, haW, _, hWX⟩
  exact a.up_mem haW hVX hWX

theorem embed_mono (a : V.Element) {g₁ g₂ : (relSystem a).Element} (h : g₁ ≤ g₂) :
    embed a g₁ ≤ embed a g₂ := by
  rintro X ⟨hVX, W, haW, hgW, hWX⟩
  exact ⟨hVX, W, haW, h _ hgW, hWX⟩

theorem le_of_embed_le (a : V.Element) {g₁ g₂ : (relSystem a).Element}
```

```
    (h : embed a g₁ ≤ embed a g₂) : g₁ ≤ g₂ := by
  intro X hg₁X
  have hVX : V.mem X := a.sub (g₁.sub hg₁X)
  have : (embed a g₂).mem X := h X ⟨hVX, X, g₁.sub hg₁X, hg₁X, subset_rfl⟩
  obtain ⟨_, W, haW, hg₂W, hWX⟩ := this
  exact g₂.up_mem hg₂W (g₁.sub hg₁X) hWX

def relMap (f : ApproximableMap V V) {a : V.Element} (ha : f.toElementMap a = a) :
    ApproximableMap (relSystem a) (relSystem a) where
  rel X Y := a.mem X ∧ f.rel X Y
  rel_dom := fun h => h.1
  rel_cod := by
    rintro X Y ⟨haX, hXY⟩
    have hVX : V.mem X := a.sub haX
    have hpr : V.principal hVX ≤ a := fun Z ⟨hVZ, hXZ⟩ => a.up_mem haX hVZ hXZ
    have hmemfX : (f.toElementMap (V.principal hVX)).mem Y := (f.rel_iff_mem_principal
     hVX).mp hXY
    have hle : f.toElementMap (V.principal hVX) ≤ f.toElementMap a := f.
    toElementMap_mono hpr
    have : (f.toElementMap a).mem Y := hle Y hmemfX
    rw [ha] at this
    exact this
  master_rel := ⟨a.master_mem, f.master_rel⟩
  inter_right := by
    rintro X Y Y' ⟨haX, hXY⟩ ⟨_, hXY'⟩
    exact ⟨haX, f.inter_right hXY hXY'⟩
  mono := by
    rintro X X' Y Y' ⟨_, hXY⟩ hX'X hYY' haX' haY'
    exact ⟨haX', f.mono hXY hX'X hYY' (a.sub haX') (a.sub haY')⟩

def restrict (a : V.Element) (x : V.Element) (hx : x ≤ a) : (relSystem a).Element
    where
  mem X := x.mem X
  sub := fun h => hx _ h
  master_mem := x.master_mem
  inter_mem := fun hX hY => x.inter_mem hX hY
  up_mem := fun hX hY hXY => x.up_mem hX (a.sub hY) hXY

theorem embed_restrict (a : V.Element) (x : V.Element) (hx : x ≤ a) :
    embed a (restrict a x hx) = x := by
  apply Element.ext
  intro X
  constructor
  · rintro ⟨hVX, W, _, hxW, hWX⟩
    exact x.up_mem hxW hVX hWX
  · intro hxX
    exact ⟨x.sub hxX, X, hx _ hxX, hxX, subset_rfl⟩

theorem restrict_embed (a : V.Element) (g : (relSystem a).Element) :
    restrict a (embed a g) (embed_le a g) = g := by
  apply Element.ext
  intro X
  constructor
  · rintro ⟨hVX, W, haW, hgW, hWX⟩
    exact g.up_mem hgW (a.up_mem haW hVX hWX) hWX
  · intro hgX
```

```
    exact ⟨a.sub (g.sub hgX), X, g.sub hgX, hgX, subset_rfl⟩

def relIso (a : V.Element) : (relSystem a).Element ≃o {x : V.Element // x ≤ a} where
  toFun g := ⟨embed a g, embed_le a g⟩
  invFun x := restrict a x.1 x.2
  left_inv g := restrict_embed a g
  right_inv x := Subtype.ext (embed_restrict a x.1 x.2)
  map_rel_iff' := by
    intro g₁ g₂
    constructor
    · intro h; exact le_of_embed_le a h
    · intro h; exact embed_mono a h

theorem fixElement_below_unique (f : ApproximableMap V V) {x : V.Element}
    (hxle : x ≤ f.fixElement) (hxfix : f.toElementMap x = x) : x = f.fixElement := by
  have hge : f.fixElement ≤ x := fixElement_le_of_toElementMap_le f (le_of_eq hxfix)
  exact le_antisymm hxle hge

theorem relMap_toElementMap_embed (f : ApproximableMap V V) {a : V.Element}
    (ha : f.toElementMap a = a) (g : (relSystem a).Element) :
    embed a ((relMap f ha).toElementMap g) = f.toElementMap (embed a g) := by
  apply Element.ext
  intro X
  constructor
  · rintro ⟨hVX, W, haW, ⟨U, hgU, haU, hUW⟩, hWX⟩

    refine ⟨U, ⟨a.sub haU, U, haU, hgU, subset_rfl⟩, ?_⟩
    exact f.mono hUW subset_rfl hWX (a.sub haU) hVX
  · rintro ⟨U, ⟨hVU, W, haW, hgW, hWU⟩, hUX⟩

    have hVX : V.mem X := f.rel_cod hUX
    have hWX : f.rel W X := f.mono hUX hWU subset_rfl (a.sub haW) hVX
    have haX : a.mem X := by
      have hpr : V.principal (a.sub haW) ≤ a := fun Z ⟨hVZ, hXZ⟩ => a.up_mem haW hVZ
    hXZ
      have hmemfW : (f.toElementMap (V.principal (a.sub haW))).mem X :=
        (f.rel_iff_mem_principal (a.sub haW)).mp hWX
      have := (f.toElementMap_mono hpr) X hmemfW
      rw [ha] at this; exact this
    exact ⟨hVX, X, haX, ⟨W, hgW, haW, hWX⟩, subset_rfl⟩

theorem relMap_unique_fixed (f : ApproximableMap V V)
    (ha : f.toElementMap f.fixElement = f.fixElement) (g : (relSystem f.fixElement).
    Element)
    (hg : (relMap f ha).toElementMap g = g) :
    g = restrict f.fixElement f.fixElement (le_refl _) := by

  have hembfix : f.toElementMap (embed f.fixElement g) = embed f.fixElement g := by
    rw [← relMap_toElementMap_embed f ha g, hg]
  have heq : embed f.fixElement g = f.fixElement :=
    fixElement_below_unique f (embed_le f.fixElement g) hembfix

  have h1 : restrict f.fixElement (embed f.fixElement g) (embed_le f.fixElement g) = g
     :=
    restrict_embed f.fixElement g
```

```
  have h2 : restrict f.fixElement (embed f.fixElement g) (embed_le f.fixElement g)
      = restrict f.fixElement f.fixElement (le_refl _) := by
    apply Element.ext
    intro X
    show (embed f.fixElement g).mem X ↔ f.fixElement.mem X
    rw [heq]
  rw [← h1, h2]

end ApproximableMap
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.ApproximableMap
section
set_option linter.unusedVariables false

theorem example_410.{u_1} : And
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
    {x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
    @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
        x (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f) →
      @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f x
    ) x →
        @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) x
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
    (ha :
      @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
    (g :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.relSystem α V
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))),
    @Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.relSystem α V
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f)))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.relSystem α V
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.relSystem α V
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.relMap α V f
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f) ha)
          g)
```

```
      g →
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.relSystem α V
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f)))
      g
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.restrict α V
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f)
        (@le_refl (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
 )
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))))
 :=
@And.intro
(∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
  {x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
  @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
  α V)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V)))
      x (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f) →
    @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f x
 ) x →
      @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) x
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
(∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
  (ha :
    @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
  (g :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.relSystem α V
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))),
  @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.relSystem α V
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f)))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.relSystem α V
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.relSystem α V
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.relMap α V f
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f) ha)
```

```
          g)
        g →
      @Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.relSystem α V
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f)))
        g
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.restrict α V
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f)
          (@le_refl (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
    )
            (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement α V f))))
  @DomainTheory.NeighbourhoodSystems.ApproximableMap.fixElement_below_unique
  @DomainTheory.NeighbourhoodSystems.ApproximableMap.relMap_unique_fixed
end

end DomainTheory.NeighbourhoodSystems.ApproximableMap
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

section
variable {α : Type*} {V : NeighborhoodSystem α}

namespace ApproximableMap

def inclMap (a : V.Element) : ApproximableMap (relSystem a) V where
  rel X Y := a.mem X ∧ V.mem Y ∧ X ⊆ Y
  rel_dom := fun h => h.1
  rel_cod := fun h => h.2.1
  master_rel := ⟨a.master_mem, V.master_mem, subset_rfl⟩
  inter_right := by
    rintro X Y Y' ⟨haX, hVY, hXY⟩ ⟨_, hVY', hXY'⟩
    exact ⟨haX, V.inter_mem hVY hVY' (a.sub haX) (Set.subset_inter hXY hXY'),
      Set.subset_inter hXY hXY'⟩
  mono := by
    rintro X X' Y Y' ⟨_, _, hXY⟩ hX'X hYY' haX' hVY'
    exact ⟨haX', hVY', (hX'X.trans hXY).trans hYY'⟩

theorem inclMap_toElementMap (a : V.Element) (g : (relSystem a).Element) :
    (inclMap a).toElementMap g = embed a g := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨X, hgX, haX, hVY, hXY⟩
    exact ⟨hVY, X, haX, hgX, hXY⟩
  · rintro ⟨hVY, W, haW, hgW, hWY⟩
    exact ⟨W, hgW, haW, hVY, hWY⟩

theorem inclMap_bot (a : V.Element) : (inclMap a).toElementMap (relSystem a).bot = V.
    bot := by
  rw [inclMap_toElementMap]
```

```
  apply Element.ext
  intro Y
  rw [mem_bot]
  constructor
  · rintro ⟨hVY, W, _, hbW, hWY⟩
    rw [mem_bot] at hbW
    rw [hbW] at hWY
    exact Set.Subset.antisymm (V.sub_master hVY) hWY
  · rintro rfl
    exact ⟨V.master_mem, V.master, a.master_mem, (relSystem a).bot.master_mem,
    subset_rfl⟩

theorem inclMap_intertwine (f : ApproximableMap V V) {a : V.Element} (ha : f.
    toElementMap a = a)
    (g : (relSystem a).Element) :
    (inclMap a).toElementMap ((relMap f ha).toElementMap g) =
      f.toElementMap ((inclMap a).toElementMap g) := by
  rw [inclMap_toElementMap, inclMap_toElementMap, relMap_toElementMap_embed]

end ApproximableMap
end

end DomainTheory.NeighbourhoodSystems
end
```

3.5.13 Exercise 4.11 — characterizing the fix combinator

(Suggested by G. Plotkin). We can regard fix as assigning a fixed-point operator to each domain D. Show that fix is uniquely determined by the following general conditions on an assignment $D \rightsquigarrow F_D$:

(i) $F_D : (D \to D) \to D$;

(ii) $F_D(f) = f(F_D(f))$ for all $f : D \to D$;

(iii) whenever $f_0 : D_0 \to D_0$ and $f_1 : D_1 \to D_1$ are given and $h : D_0 \to D_1$ is such that $h(\bot) = \bot$ and $h \circ f_0 = f_1 \circ h$, then $h(F_{D_0}(f_0)) = F_{D_1}(f_1)$.

(Hint: Apply 4.7 to prove fix satisfies (iii). In the other direction use 4.10.)

Exercise_4_11.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_10
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_7
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α : Type*} {V : NeighborhoodSystem α}
```

```
open ApproximableMap
universe u

theorem fix_unique_of_uniform
    (F : ∀ {β : Type u} (W : NeighborhoodSystem β), ApproximableMap W W → W.Element)
    (hfixed : ∀ {β : Type u} (W : NeighborhoodSystem β) (g : ApproximableMap W W),
      g.toElementMap (F W g) = F W g)
    (huniform : ∀ {β ? : Type u} (W₀ : NeighborhoodSystem β) (W₁ : NeighborhoodSystem
    ?)
      (g₀ : ApproximableMap W₀ W₀) (g₁ : ApproximableMap W₁ W₁) (h : ApproximableMap W₀
    W₁),
      h.toElementMap W₀.bot = W₁.bot →
      (∀ x, h.toElementMap (g₀.toElementMap x) = g₁.toElementMap (h.toElementMap x)) →
      h.toElementMap (F W₀ g₀) = F W₁ g₁)
    {α : Type u} (V : NeighborhoodSystem α) (f : ApproximableMap V V) :
    F V f = f.fixElement := by
  have ha : f.toElementMap f.fixElement = f.fixElement := toElementMap_fixElement f

  have hfix' : (relMap f ha).toElementMap (F (relSystem f.fixElement) (relMap f ha)) =
      F (relSystem f.fixElement) (relMap f ha) := hfixed (relSystem f.fixElement) (
    relMap f ha)

  have huniq : F (relSystem f.fixElement) (relMap f ha) =
      restrict f.fixElement f.fixElement (le_refl _) :=
    relMap_unique_fixed f ha _ hfix'

  have huse := huniform (relSystem f.fixElement) V (relMap f ha) f (inclMap f.
    fixElement)
    (inclMap_bot f.fixElement) (inclMap_intertwine f ha)
  rw [huniq, inclMap_toElementMap, embed_restrict] at huse
  exact huse.symm
end

section
variable {α : Type*} {V : NeighborhoodSystem α}

namespace ApproximableMap

theorem iterElem_le_fixElement (f : ApproximableMap V V) (n : ℕ) :
    f.iterElem n ≤ f.fixElement :=
  fun _ hX => ⟨n, (mem_iterElem f n).mp hX⟩

theorem fixElement_uniform {β ? : Type*} {W₀ : NeighborhoodSystem β} {W₁ :
    NeighborhoodSystem ?}
    (f₀ : ApproximableMap W₀ W₀) (f₁ : ApproximableMap W₁ W₁) (h : ApproximableMap W₀ W₁
    )
    (hbot : h.toElementMap W₀.bot = W₁.bot)
    (hintw : ∀ x, h.toElementMap (f₀.toElementMap x) = f₁.toElementMap (h.toElementMap
    x)) :
    h.toElementMap f₀.fixElement = f₁.fixElement := by

  have hiter : ∀ n, h.toElementMap (f₀.iterElem n) = f₁.iterElem n := by
    intro n
    rw [iterElem_eq_iterate f₀ n, iterElem_eq_iterate f₁ n]
    induction n with
    | zero => simpa using hbot
```

```
    | succ k ih =>
      rw [Function.iterate_succ', Function.comp_apply, Function.iterate_succ',
        Function.comp_apply, hintw, ih]
  apply le_antisymm
  ·
    rw [fixElement_eq_iSupDirected f₀, toElementMap_iSupDirected]
    apply NeighborhoodSystem.iSupDirected_le
    intro n
    rw [hiter n]
    exact iterElem_le_fixElement f₁ n
  ·
    have hfp : f₁.toElementMap (h.toElementMap f₀.fixElement) = h.toElementMap f₀.
    fixElement := by
      rw [← hintw f₀.fixElement, toElementMap_fixElement]
    exact fixElement_le_of_toElementMap_le f₁ (le_of_eq hfp)

theorem commuting_least_common_fixed {f g : ApproximableMap V V} (hcomm : f.comp g = g
    .comp f) :
    ∃ x : V.Element, f.toElementMap x = x ∧ g.toElementMap x = x ∧
      ∀ w : V.Element, f.toElementMap w = w → g.toElementMap w = w → x ≤ w := by
  set a := f.fixElement with ha_def
  have hfa : f.toElementMap a = a := toElementMap_fixElement f

  have ha_le : a ≤ g.toElementMap a := by
    apply fixElement_le_of_toElementMap_le f
    rw [commute_apply hcomm, hfa]
  set x := g.fixAbove ha_le with hx_def
  have hgx : g.toElementMap x = x := fixAbove_isFixed g ha_le
  have hax : a ≤ x := le_fixAbove g ha_le

  have hfix_each : ∀ n, f.toElementMap (g.iterFrom a n) = g.iterFrom a n := by
    intro n
    induction n with
    | zero => rw [iterFrom_zero]; exact hfa
    | succ k ih =>
      rw [iterFrom_succ g a k, commute_apply hcomm, ih]

  have hfx : f.toElementMap x = x := by
    apply le_antisymm
    · rw [hx_def, fixAbove, toElementMap_iSupDirected]
      apply NeighborhoodSystem.iSupDirected_le
      intro n
      rw [hfix_each n]
      exact NeighborhoodSystem.le_iSupDirected (g.iterFrom a) _ n
    · rw [hx_def, fixAbove]
      apply NeighborhoodSystem.iSupDirected_le
      intro n
      rw [← hfix_each n]
      exact f.toElementMap_mono (NeighborhoodSystem.le_iSupDirected (g.iterFrom a) _ n
    )
  refine ⟨x, hfx, hgx, ?_⟩
  intro w hfw hgw
  have haw : a ≤ w := fixElement_le_of_toElementMap_le f (le_of_eq hfw)
  exact fixAbove_least g ha_le haw (le_of_eq hgw)

theorem fixElement_eq_of_commuting_bot {f g : ApproximableMap V V} (hcomm : f.comp g =
```

```
     g.comp f)
    (hbot : f.toElementMap V.bot = g.toElementMap V.bot) :
    f.fixElement = g.fixElement := by

  have hshift : ∀ n, g.toElementMap (f.iterElem n) = f.iterElem (n + 1) := by
    intro n
    induction n with
    | zero =>
      rw [iterElem_zero, iterElem_succ, iterElem_zero, ← hbot]
    | succ k ih =>
      rw [iterElem_succ, ← commute_apply hcomm, ih]
      exact (iterElem_succ f (k + 1)).symm

  have hgfixf : g.toElementMap f.fixElement = f.fixElement := by
    rw [fixElement_eq_iSupDirected f, toElementMap_iSupDirected]
    apply le_antisymm
    · apply NeighborhoodSystem.iSupDirected_le
      intro n
      rw [hshift n]
      exact NeighborhoodSystem.le_iSupDirected f.iterElem _ (n + 1)
    · apply NeighborhoodSystem.iSupDirected_le
      intro n
      calc f.iterElem n ≤ f.iterElem (n + 1) := iterElem_mono f (Nat.le_succ n)
        _ = g.toElementMap (f.iterElem n) := (hshift n).symm
        _ ≤ _ := NeighborhoodSystem.le_iSupDirected (fun m => g.toElementMap (f.
    iterElem m)) _ n

  have hshift' : ∀ n, f.toElementMap (g.iterElem n) = g.iterElem (n + 1) := by
    intro n
    induction n with
    | zero =>
      rw [iterElem_zero, iterElem_succ, iterElem_zero, hbot]
    | succ k ih =>
      rw [iterElem_succ, commute_apply hcomm, ih]
      exact (iterElem_succ g (k + 1)).symm
  have hffixg : f.toElementMap g.fixElement = g.fixElement := by
    rw [fixElement_eq_iSupDirected g, toElementMap_iSupDirected]
    apply le_antisymm
    · apply NeighborhoodSystem.iSupDirected_le
      intro n
      rw [hshift' n]
      exact NeighborhoodSystem.le_iSupDirected g.iterElem _ (n + 1)
    · apply NeighborhoodSystem.iSupDirected_le
      intro n
      calc g.iterElem n ≤ g.iterElem (n + 1) := iterElem_mono g (Nat.le_succ n)
        _ = f.toElementMap (g.iterElem n) := (hshift' n).symm
        _ ≤ _ := NeighborhoodSystem.le_iSupDirected (fun m => f.toElementMap (g.
    iterElem m)) _ n
  apply le_antisymm
  · exact fixElement_le_of_toElementMap_le f (le_of_eq hffixg)
  · exact fixElement_le_of_toElementMap_le g (le_of_eq hgfixf)

theorem fixElement_iterTwice (f : ApproximableMap V V) :
    f.fixElement = (f.comp f).fixElement := by
  apply le_antisymm
  ·
```

```
    rw [fixElement_eq_iSupDirected f]
    apply NeighborhoodSystem.iSupDirected_le
    intro n
    calc f.iterElem n ≤ f.iterElem (2 * n) := iterElem_mono f (by omega)
      _ = (f.comp f).iterElem n := (comp_self_iterElem f n).symm
      _ ≤ (f.comp f).fixElement := iterElem_le_fixElement (f.comp f) n
  .
    refine fixElement_le_of_toElementMap_le (f.comp f) (le_of_eq ?_)
    rw [toElementMap_comp, toElementMap_fixElement, toElementMap_fixElement]

end ApproximableMap
end

end DomainTheory.NeighbourhoodSystems
end
```

3.5.14 Exercise 4.12 — no greatest fixed point

Need an approximable $f : D \to D$ have a maximum fixed point? Give an example where there are many fixed points.

Exercise_4_12.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Theorem_2_5

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Example_1_2

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems.Exercise412
open NeighborhoodSystem ApproximableMap Example12 Example12.neighborhoodSystem

section

abbrev T : NeighborhoodSystem Example12.Token := Example12.neighborhoodSystem

theorem one_ne_zero : (Example12.one) = Example12.zero := by
  intro h
  rw [Example12.one, Example12.zero, Set.ext_iff] at h
  have h1 : (1 : Example12.Token) = 0 := (h 1).mp rfl
  exact absurd h1 (by decide)

theorem one_ne_master : (Example12.one) = Example12.master := by
  intro h
  rw [Example12.one, Example12.master, Set.ext_iff] at h
  have h0 : (0 : Example12.Token) ∈ ({1} : Set Example12.Token) := (h 0).mpr (Set.
    mem_univ 0)
  simp only [Set.mem_singleton_iff] at h0
  exact absurd h0 (by decide)

theorem zero_ne_master : (Example12.zero) = Example12.master := by
```

```
  intro h
  rw [Example12.zero, Example12.master, Set.ext_iff] at h
  have h1 : (1 : Example12.Token) ∈ ({0} : Set Example12.Token) := (h 1).mpr (Set.
    mem_univ 1)
  simp only [Set.mem_singleton_iff] at h1
  exact absurd h1 (by decide)
end

section

theorem elemOne_not_le_elemZero : ¬ elemOne ≤ elemZero := by
  intro h
  rcases h Example12.one (Or.inr rfl) with hm | hz
  · exact one_ne_master hm
  · exact one_ne_zero hz
end

section

theorem elemZero_not_le_elemOne : ¬ elemZero ≤ elemOne := by
  intro h
  rcases h Example12.zero (Or.inr rfl) with hm | ho
  · exact zero_ne_master hm
  · exact one_ne_zero ho.symm
end

section

theorem idMap_fixed (x : T.Element) : (idMap T).toElementMap x = x :=
    toElementMap_idMap x
end

section

theorem no_greatest_fixedPoint :
    ¬ ∃ z : T.Element, (idMap T).toElementMap z = z ∧
      ∀ x, (idMap T).toElementMap x = x → x ≤ z := by
  rintro ⟨z, _, hz⟩
  have h0 : elemZero ≤ z := hz elemZero (idMap_fixed elemZero)
  have h1 : elemOne ≤ z := hz elemOne (idMap_fixed elemOne)
  rcases element_classification z with rfl | rfl | rfl
  · exact (bot_lt_elemZero).2 h0
  · exact elemOne_not_le_elemZero h1
  · exact elemZero_not_le_elemOne h0
end

section
set_option linter.unusedVariables false

theorem example_412 : And
  (∀
    (x :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
    NeighbourhoodSystems.Example12.Token
        DomainTheory.NeighbourhoodSystems.Exercise412.T),
    @Eq
```

```
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.Example12.Token
      DomainTheory.NeighbourhoodSystems.Exercise412.T)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap DomainTheory.
  NeighbourhoodSystems.Example12.Token
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise412.T
      DomainTheory.NeighbourhoodSystems.Exercise412.T
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap DomainTheory.
  NeighbourhoodSystems.Example12.Token
        DomainTheory.NeighbourhoodSystems.Exercise412.T)
      x)
    x)
(Not
  (∃ (z :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.Example12.Token
      DomainTheory.NeighbourhoodSystems.Exercise412.T),
    And
      (@Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
          DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise412.T)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
          DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Example12.Token
          DomainTheory.NeighbourhoodSystems.Exercise412.T DomainTheory.
  NeighbourhoodSystems.Exercise412.T
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap DomainTheory.
  NeighbourhoodSystems.Example12.Token
            DomainTheory.NeighbourhoodSystems.Exercise412.T)
          z)
        z)
      (∀
        (x :
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
            DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise412.T),
        @Eq
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
              DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise412.T)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
              DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Example12.Token
              DomainTheory.NeighbourhoodSystems.Exercise412.T DomainTheory.
  NeighbourhoodSystems.Exercise412.T
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap
                DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise412.T)
              x)
            x →
          @LE.le
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
              DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise412.T)
```

```
           (@Preorder.toLE
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
               DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise412.T)
             (@PartialOrder.toPreorder
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
                 DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise412.T)
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement
                 DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise412.T)))
           x z))) :=
@And.intro
(∀
  (x :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.Example12.Token
      DomainTheory.NeighbourhoodSystems.Exercise412.T),
  @Eq
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.Example12.Token
      DomainTheory.NeighbourhoodSystems.Exercise412.T)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap DomainTheory.
  NeighbourhoodSystems.Example12.Token
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise412.T
      DomainTheory.NeighbourhoodSystems.Exercise412.T
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap DomainTheory.
  NeighbourhoodSystems.Example12.Token
        DomainTheory.NeighbourhoodSystems.Exercise412.T)
      x)
    x)
(Not
  (∃ (z :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.Example12.Token
      DomainTheory.NeighbourhoodSystems.Exercise412.T),
    And
      (@Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
          DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise412.T)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
          DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Example12.Token
          DomainTheory.NeighbourhoodSystems.Exercise412.T DomainTheory.
  NeighbourhoodSystems.Exercise412.T
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap DomainTheory.
  NeighbourhoodSystems.Example12.Token
            DomainTheory.NeighbourhoodSystems.Exercise412.T)
          z)
        z)
      (∀
        (x :
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
```

```
            DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.Exercise412.T),
          @Eq
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
                DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.Exercise412.T)
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
                DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.Example12.Token
                DomainTheory.NeighbourhoodSystems.Exercise412.T DomainTheory.
    NeighbourhoodSystems.Exercise412.T
               (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap
                 DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.Exercise412.T)
               x)
             x →
           @LE.le
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
              DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.Exercise412.T)
              (@Preorder.toLE
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
                 DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.Exercise412.T)
               (@PartialOrder.toPreorder
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
                   DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.Exercise412.T)
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement
                   DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.Exercise412.T)))
              x z)))
  DomainTheory.NeighbourhoodSystems.Exercise412.idMap_fixed
  DomainTheory.NeighbourhoodSystems.Exercise412.no_greatest_fixedPoint
end

end DomainTheory.NeighbourhoodSystems.Exercise412
end
```

3.5.15 Exercise 4.13 — avoiding the natural numbers

The proof of 4.1 uses the integers, whereas the proof of 4.6 uses 4.1. There is a hint of circularity here! It can be eliminated by the following steps:

(1) If a domain D has an element a where, for $f : D \to D$, the relation $f(a) \sqsubseteq a$ holds, then the least fixed point can be defined by

$$\mathrm{fix}(f) = \bigsqcap\{x \in |D| \mid f(x) \sqsubseteq x\}.$$

Note that $\mathrm{fix}(f) \sqsubseteq a$. (Hint: Remark that by 1.17 the formula gives a well-defined element. Call the element b. Prove that $f(b) \sqsubseteq b$ by showing that $f(b) \sqsubseteq x$ whenever $f(x) \sqsubseteq x$. Then note that $f(f(b)) \sqsubseteq f(b)$ so that $b \sqsubseteq f(b)$ also. Conclude $b = \mathrm{fix}(f)$ as least fixed point.)

(2) Remark that this proof uses only the monotonicity property of $f : |D| \to |D|$. Remark, too, that (1) can always be applied to power-set domains PA for any set A.

(3) Review the proof of 4.6 and establish by a fixed-point method that for any structured set $\langle Z, z, \cdot \rangle$ there is a unique function $s : \mathbf{N} \to Z$ such that

(i) $s(0) = z$;

(ii) $s(n^+) = s(n)^{\cdot}$, for $n \in \mathbf{N}$.

(4) Employ (3) for the proof of 4.1 by identifying $\langle \mathbf{N}, 0, {}^+ \rangle$.

Exercise_4_13.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_24

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_18

@[expose] public section

section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem

variable {α : Type*} {V : NeighborhoodSystem α}

namespace NeighborhoodSystem

def preFix (f : V.Element → V.Element) : Set V.Element := {x | f x ≤ x}

end NeighborhoodSystem

end DomainTheory.NeighbourhoodSystems
end

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

section
variable {α : Type*} {V : NeighborhoodSystem α}

namespace NeighborhoodSystem

@[simp] theorem mem_preFix {f : V.Element → V.Element} {x : V.Element} :
    x ∈ preFix f ↔ f x ≤ x := Iff.rfl

def monoFix (f : V.Element → V.Element) {a : V.Element} (ha : f a ≤ a) : V.Element :=
```

```
  V.sInf (preFix f) ⟨a, ha⟩

theorem exists_unique_nat_rec {Z : Type*} (z : Z) (op : Z → Z) :
    ∃! s : ℕ → Z, s 0 = z ∧ ∀ n, s (n + 1) = op (s n) := by
  refine ⟨fun n => Nat.rec z (fun _ x => op x) n, ⟨rfl, fun _ => rfl⟩, ?_⟩
  rintro s ⟨h0, hsucc⟩
  funext n
  induction n with
  | zero => exact h0
  | succ k ih => rw [hsucc k, ih]

theorem monoFix_le_preFix (f : V.Element → V.Element) {a : V.Element} (ha : f a ≤ a)
    {x : V.Element} (hx : f x ≤ x) : monoFix f ha ≤ x :=
  V.sInf_le (preFix f) ⟨a, ha⟩ hx

theorem monoFix_le (f : V.Element → V.Element) {a : V.Element} (ha : f a ≤ a) :
    monoFix f ha ≤ a := monoFix_le_preFix f ha ha

theorem monoFix_least (f : V.Element → V.Element) {a : V.Element} (ha : f a ≤ a)
    {y : V.Element} (hy : f y = y) : monoFix f ha ≤ y :=
  monoFix_le_preFix f ha (le_of_eq hy)

theorem monoFix_preFix (f : V.Element → V.Element) (hf : Monotone f) {a : V.Element}
    (ha : f a ≤ a) : f (monoFix f ha) ≤ monoFix f ha := by
  apply V.le_sInf (preFix f) ⟨a, ha⟩
  intro x hx
  exact le_trans (hf (monoFix_le_preFix f ha hx)) hx

theorem monoFix_isFixed (f : V.Element → V.Element) (hf : Monotone f) {a : V.Element}
    (ha : f a ≤ a) : f (monoFix f ha) = monoFix f ha := by
  have hfb : f (monoFix f ha) ≤ monoFix f ha := monoFix_preFix f hf ha
  have hbf : monoFix f ha ≤ f (monoFix f ha) :=
    monoFix_le_preFix f ha (hf hfb)
  exact le_antisymm hfb hbf

theorem nat_iterate_unique {s : ℕ → ℕ} (h0 : s 0 = 0) (hsucc : ∀ n, s (n + 1) = s n +
    1) :
    ∀ n, s n = n := by
  intro n
  induction n with
  | zero => exact h0
  | succ k ih => rw [hsucc k, ih]

end NeighborhoodSystem
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
section
set_option linter.unusedVariables false

theorem example_413.{u_1, u_2} : And
  (And
    (And
      (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
        (f :
```

```
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
    @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α V))
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α V))
        f →
      ∀ {a : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V}
        (ha :
          @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
V)
            (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.Element α V)
              (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α V)))
            (f a) a),
        @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (f (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.monoFix α V f
a ha))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.monoFix α V f a
ha))
  (∀ {Z : Type u_2} (z : Z) (op : Z → Z),
    @ExistsUnique (Nat → Z) fun (s : Nat → Z) =>
      And (@Eq Z (s (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))) z)
        (∀ (n : Nat),
          @Eq Z
            (s
              (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) n
                (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))))
            (op (s n)))))
(∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (f :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
  {a : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V}
  (ha :
    @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α V)))
      (f a) a)
  {y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
  @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (f y) y
→
    @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
```

```
       (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V)
         (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.monoFix α V f a ha) y
  ))
(∀ {s : Nat → Nat},
  @Eq Nat (s (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))))
      (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))) →
    (∀ (n : Nat),
       @Eq Nat
         (s
           (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) n
             (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))))
         (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) (s n)
           (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))) →
     ∀ (n : Nat), @Eq Nat (s n) n) :=
@And.intro
(And
  (And
    (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      (f :
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
      @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V))
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V))
          f →
        ∀ {a : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V}
          (ha :
            @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
  V)
              (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
  .Element α V)
                (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
              (f a) a),
          @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
            (f (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.monoFix α V f
  a ha))
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.monoFix α V f a
  ha))
    (∀ {Z : Type u_2} (z : Z) (op : Z → Z),
      @ExistsUnique (Nat → Z) fun (s : Nat → Z) =>
        And (@Eq Z (s (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))) z)
```

```
          (∀ (n : Nat),
            @Eq Z
              (s
                (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) n
                  (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))))
              (op (s n)))))
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
    {a : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V}
    (ha :
      @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
        (f a) a)
    {y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
    @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (f y) y
  →
      @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.monoFix α V f a ha) y
  ))
(∀ {s : Nat → Nat},
  @Eq Nat (s (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))))
      (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))) →
    (∀ (n : Nat),
        @Eq Nat
          (s
            (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) n
              (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))))
          (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) (s n)
            (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))) →
      ∀ (n : Nat), @Eq Nat (s n) n)
(@And.intro
  (And
    (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      (f :
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
      @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V))
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
```

```
NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α V))
        f →
      ∀ {a : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V}
        (ha :
          @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
V)
            (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.Element α V)
              (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α V)))
            (f a) a),
        @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (f (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.monoFix α V f
a ha))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.monoFix α V f a
ha))
  (∀ {Z : Type u_2} (z : Z) (op : Z → Z),
    @ExistsUnique (Nat → Z) fun (s : Nat → Z) =>
      And (@Eq Z (s (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))) z)
        (∀ (n : Nat),
          @Eq Z
            (s
              (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) n
                (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))))
            (op (s n)))))
(∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (f :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
  {a : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V}
  (ha :
    @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α V)))
      (f a) a)
  {y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
  @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (f y) y
→
    @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α V)))
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.monoFix α V f a ha) y
)
(@And.intro
```

```
      (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
        (f :
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
        @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
            (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V))
            (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V))
            f →
          ∀ {a : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V}
            (ha :
              @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
    V)
                (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
    .Element α V)
                  (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
                (f a) a),
            @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
              (f (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.monoFix α V f
    a ha))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.monoFix α V f a
    ha))
      (∀ {Z : Type u_2} (z : Z) (op : Z → Z),
        @ExistsUnique (Nat → Z) fun (s : Nat → Z) =>
          And (@Eq Z (s (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))) z)
            (∀ (n : Nat),
              @Eq Z
                (s
                  (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) n
                    (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))))
                (op (s n))))
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.monoFix_isFixed
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.exists_unique_nat_rec)
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.monoFix_least)
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.nat_iterate_unique
end

end DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

section
variable {α : Type*} {V : NeighborhoodSystem α}

namespace NeighborhoodSystem

theorem chainUnion_le (C : Set V.Element) (hne : C.Nonempty) (hchain : IsChain (· ≤ ·)
```

```
    C)
    {y : V.Element} (hy : ∀ x ∈ C, x ≤ y) : V.chainUnion C hne hchain ≤ y := by
  rintro Z ⟨x, hxC, hxZ⟩
  exact hy x hxC Z hxZ

end NeighborhoodSystem
end
end DomainTheory.NeighbourhoodSystems
end
```

3.5.16 Exercise 4.14 — greatest powerset fixed point

Need a monotone function $f : PA \to PA$ always have a *maximum* fixed point?

Exercise_4_14.lean

```
module

public import Mathlib.Order.BourbakiWitt

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise414
end DomainTheory.NeighbourhoodSystems.Exercise414

section
namespace DomainTheory.NeighbourhoodSystems.Exercise414
section
variable {A : Type*}

def gfpSet (f : Set A → Set A) : Set A := {a | ∃ x : Set A, x ⊆ f x ∧ a ∈ x}

def lfpSet (f : Set A → Set A) : Set A := {a | ∀ x : Set A, f x ⊆ x → a ∈ x}

theorem lfpSet_subset (f : Set A → Set A) {x : Set A} (hx : f x ⊆ x) : lfpSet f ⊆ x
    :=
  fun _ ha => ha x hx

theorem f_subset_lfpSet (f : Set A → Set A) (hf : Monotone f) :
    f (lfpSet f) ⊆ lfpSet f := by
  intro a ha x hx
  exact hx (hf (lfpSet_subset f hx) ha)

theorem lfpSet_isFixed (f : Set A → Set A) (hf : Monotone f) :
    f (lfpSet f) = lfpSet f := by
  have hsub : f (lfpSet f) ⊆ lfpSet f := f_subset_lfpSet f hf
  have hsup : lfpSet f ⊆ f (lfpSet f) := lfpSet_subset f (hf hsub)
  exact Set.Subset.antisymm hsub hsup

theorem lfpSet_least (f : Set A → Set A) {y : Set A} (hy : f y = y) :
    lfpSet f ⊆ y := lfpSet_subset f (le_of_eq hy)

theorem subset_gfpSet (f : Set A → Set A) {x : Set A} (hx : x ⊆ f x) : x ⊆ gfpSet f
    :=
  fun _ ha => ⟨x, hx, ha⟩
```

```
theorem gfpSet_greatest (f : Set A → Set A) {y : Set A} (hy : f y = y) :
    y ⊆ gfpSet f := subset_gfpSet f (le_of_eq hy.symm)

theorem gfpSet_subset_f (f : Set A → Set A) (hf : Monotone f) :
    gfpSet f ⊆ f (gfpSet f) := by
  rintro a ⟨x, hx, hax⟩
  exact hf (subset_gfpSet f hx) (hx hax)

theorem gfpSet_isFixed (f : Set A → Set A) (hf : Monotone f) :
    f (gfpSet f) = gfpSet f := by
  have hsub : gfpSet f ⊆ f (gfpSet f) := gfpSet_subset_f f hf
  have hsup : f (gfpSet f) ⊆ gfpSet f := subset_gfpSet f (hf hsub)
  exact Set.Subset.antisymm hsup hsub

end

section
set_option linter.unusedVariables false

theorem example_414.{u_1} : And
  (∀ {A : Type u_1} (f : Set A → Set A) {y : Set A},
    @Eq (Set A) (f y) y → @LE.le (Set A) (@Set.instLE A) y (@DomainTheory.
    NeighbourhoodSystems.Exercise414.gfpSet A f))
  (∀ {A : Type u_1} (f : Set A → Set A),
    @Monotone (Set A) (Set A)
        (@PartialOrder.toPreorder (Set A)
          (@SemilatticeInf.toPartialOrder (Set A)
            (@Lattice.toSemilatticeInf (Set A) (@DistribLattice.toLattice (Set A) (
    @Set.instDistribLattice A)))))
        (@PartialOrder.toPreorder (Set A)
          (@SemilatticeInf.toPartialOrder (Set A)
            (@Lattice.toSemilatticeInf (Set A) (@DistribLattice.toLattice (Set A) (
    @Set.instDistribLattice A)))))
        f →
      @Eq (Set A) (f (@DomainTheory.NeighbourhoodSystems.Exercise414.gfpSet A f))
        (@DomainTheory.NeighbourhoodSystems.Exercise414.gfpSet A f)) :=
  @And.intro
  (∀ {A : Type u_1} (f : Set A → Set A) {y : Set A},
    @Eq (Set A) (f y) y → @LE.le (Set A) (@Set.instLE A) y (@DomainTheory.
    NeighbourhoodSystems.Exercise414.gfpSet A f))
  (∀ {A : Type u_1} (f : Set A → Set A),
    @Monotone (Set A) (Set A)
        (@PartialOrder.toPreorder (Set A)
          (@SemilatticeInf.toPartialOrder (Set A)
            (@Lattice.toSemilatticeInf (Set A) (@DistribLattice.toLattice (Set A) (
    @Set.instDistribLattice A)))))
        (@PartialOrder.toPreorder (Set A)
          (@SemilatticeInf.toPartialOrder (Set A)
            (@Lattice.toSemilatticeInf (Set A) (@DistribLattice.toLattice (Set A) (
    @Set.instDistribLattice A)))))
        f →
      @Eq (Set A) (f (@DomainTheory.NeighbourhoodSystems.Exercise414.gfpSet A f))
        (@DomainTheory.NeighbourhoodSystems.Exercise414.gfpSet A f))
  @DomainTheory.NeighbourhoodSystems.Exercise414.gfpSet_greatest
  @DomainTheory.NeighbourhoodSystems.Exercise414.gfpSet_isFixed
```

```
end

end DomainTheory.NeighbourhoodSystems.Exercise414
end
```

3.5.17 Exercise 4.15 — maximal fixed points

(For set theorists.) Let $f : |D| \to |D|$ be a monotone function on (the elements of) a domain. Show that f has a *maximal* fixed point (i.e. a fixed point that cannot be extended to a larger fixed point). (Hint: By Zorn's Lemma consider a maximal chain

$$C \subseteq \{x \in |D| \mid x \sqsubseteq f(x)\},$$

and use 2.11 to remark that $\bigsqcup C \in |D|$.) Now argue that f has a least fixed point.

Exercise_4_15.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_13
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_18

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem
section
variable {α : Type*} {V : NeighborhoodSystem α}
namespace NeighborhoodSystem

theorem exists_maximal_fixedPoint (f : V.Element → V.Element) (hf : Monotone f) :
    ∃ m, f m = m ∧ ∀ y, f y = y → m ≤ y → y ≤ m := by

  set S : Set V.Element := {x | x ≤ f x} with hS
  have ih : ∀ c ⊆ S, IsChain (· ≤ ·) c → ∃ ub ∈ S, ∀ z ∈ c, z ≤ ub := by
    intro c hcS hchain
    rcases c.eq_empty_or_nonempty with rfl | hne
    · refine ⟨⊥, ?_, fun z hz => ((Set.mem_empty_iff_false z).mp hz).elim⟩
      show (⊥ : V.Element) ≤ f ⊥
      exact _root_.bot_le
    · refine ⟨V.chainUnion c hne hchain, ?_, fun z hz => V.le_chainUnion c hne hchain
    hz⟩

      show V.chainUnion c hne hchain ≤ f (V.chainUnion c hne hchain)
      intro Z hZ
      obtain ⟨x, hxc, hxZ⟩ := hZ
      have hxle : x ≤ V.chainUnion c hne hchain := V.le_chainUnion c hne hchain hxc
      exact (le_trans (hcS hxc) (hf hxle)) Z hxZ
  obtain ⟨m, hm⟩ := zorn_le₀ S ih
```

```
  have hms : m ≤ f m := hm.1
  have hfm_le_m : f m ≤ m := hm.2 (hf hms) hms
  refine ⟨m, le_antisymm hfm_le_m hms, fun y hy hmy => hm.2 ?_ hmy⟩
  exact le_of_eq hy.symm

theorem exists_least_fixedPoint (f : V.Element → V.Element) (hf : Monotone f) :
    ∃ b, f b = b ∧ ∀ y, f y = y → b ≤ y := by
  obtain ⟨m, hfm, _⟩ := exists_maximal_fixedPoint f hf
  exact ⟨monoFix f (le_of_eq hfm), monoFix_isFixed f hf (le_of_eq hfm),
    fun y hy => monoFix_least f (le_of_eq hfm) hy⟩

end NeighborhoodSystem
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
section
set_option linter.unusedVariables false

theorem example_415.{u_1} : And
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
    @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V))
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V))
        f →
      ∃ (b : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
        And (@Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (
    f b) b)
          (∀ (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
            @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (f
     y) y →
              @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
    V)
                (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
    .Element α V)
                  (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
                b y))
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
    @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
```

```
      (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V))
      (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V))
      f →
    ∃ (m : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
      And (@Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (
  f m) m)
        (∀ (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
          @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (f
   y) y →
            @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
  V)
                (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
                  (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
                m y →
              @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
  α V)
                (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
                  (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
                y m)) :=
@And.intro
(∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (f :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
  @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V))
      (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V))
      f →
    ∃ (b : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
      And (@Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (
  f b) b)
        (∀ (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
          @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (f
   y) y →
            @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
```

```
    V)
                (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
    .Element α V)
                  (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
                b y))
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
    @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V))
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V))
        f →
      ∃ (m : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
        And (@Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (
    f m) m)
          (∀ (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
            @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (f
     y) y →
              @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
    V)
                (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
                  (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
                m y →
              @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
    α V)
                (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
                  (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
                y m))
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.exists_least_fixedPoint
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.exists_maximal_fixedPoint
end

end DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

section
```

```
variable {α : Type*} {V : NeighborhoodSystem α}

namespace NeighborhoodSystem

theorem f_sInf_le (f : V.Element → V.Element) (hf : Monotone f) (S : Set V.Element)
    (hS : S.Nonempty) (hfix : ∀ s ∈ S, f s = s) : f (V.sInf S hS) ≤ V.sInf S hS := by
  apply V.le_sInf
  intro s hsS
  calc f (V.sInf S hS) ≤ f s := hf (V.sInf_le S hS hsS)
    _ = s := hfix s hsS

end NeighborhoodSystem
end
end DomainTheory.NeighbourhoodSystems
end
```

3.5.18 Exercise 4.16 — optimal fixed point

(For fixed-point nuts). Show that a monotone function as in 4.15 has an "optimal" fixed point in the sense that it is the greatest fixed point below all the maximal fixed points and at the same time it is the largest fixed point consistent with all other fixed points. *Consistency* for sets of elements means having a common upper bound. (Hint: Follow these steps:

(1) Show that any non-empty set S of fixed points has a largest fixed point below by using the formula

$$f(\bigcap S) \sqsubseteq \bigcap S$$

and finding the least fixed point over $\bigcap S$.

(2) Letting a be the fixed point of (1) constructed from the set of maximal fixed points, remark that a is consistent with any other fixed point $x = f(x)$, since x can be extended to a maximal one. Suppose b is consistent with all fixed points, then $b \sqsubseteq y$ if y is maximal. (Why?).)

Exercise_4_16.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_15

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_13

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem
section
variable {α : Type*} {V : NeighborhoodSystem α}
namespace NeighborhoodSystem
```

```
def optimalFix (f : V.Element → V.Element) (hf : Monotone f) (S : Set V.Element) (hS :
     S.Nonempty)
     (hfix : ∀ s ∈ S, f s = s) : V.Element :=
  monoFix f (f_sInf_le f hf S hS hfix)

theorem optimalFix_isFixed (f : V.Element → V.Element) (hf : Monotone f) (S : Set V.
    Element)
     (hS : S.Nonempty) (hfix : ∀ s ∈ S, f s = s) :
     f (optimalFix f hf S hS hfix) = optimalFix f hf S hS hfix :=
  monoFix_isFixed f hf _

theorem optimalFix_le_sInf (f : V.Element → V.Element) (hf : Monotone f) (S : Set V.
    Element)
     (hS : S.Nonempty) (hfix : ∀ s ∈ S, f s = s) :
     optimalFix f hf S hS hfix ≤ V.sInf S hS :=
  monoFix_le f _

theorem optimalFix_le (f : V.Element → V.Element) (hf : Monotone f) (S : Set V.Element
    )
     (hS : S.Nonempty) (hfix : ∀ s ∈ S, f s = s) {s : V.Element} (hs : s ∈ S) :
     optimalFix f hf S hS hfix ≤ s :=
  le_trans (optimalFix_le_sInf f hf S hS hfix) (V.sInf_le S hS hs)

theorem optimalFix_consistent (f : V.Element → V.Element) (hf : Monotone f) (S : Set V
    .Element)
     (hS : S.Nonempty) (hfix : ∀ s ∈ S, f s = s) {s : V.Element} (hs : s ∈ S) :
     ∃ ub, optimalFix f hf S hS hfix ≤ ub ∧ s ≤ ub :=
  ⟨s, optimalFix_le f hf S hS hfix hs, le_refl s⟩

end NeighborhoodSystem
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
section
set_option linter.unusedVariables false

theorem example_416.{u_1} : And
  (And
    (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      (f :
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
      @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V))
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V))
          f →
        ∀ (S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
    )
```

```
      (hS : @Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V) S),
      (∀ (s : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
          @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V)
             (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
α V))
             (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)) S s →
           @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
) (f s) s) →
        @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V)
            (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α V)))
          (f (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sInf α V S hS)
)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sInf α V S hS))
 (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
   (f :
     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
   (hf :
     @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
       (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α V))
       (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α V))
       f)
   (S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
   (hS : @Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V) S)
   (hfix :
     ∀ (s : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
       @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V)
          (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
)
          (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)) S s →
         @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (f
 s) s)
   {s : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
   @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
 V)
       (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
       (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V)) S s →
```

```
     ∃ (ub : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
       And
         (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
 )
           (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)
             (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V)))
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.optimalFix α V f
 hf S hS hfix) ub)
         (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
 )
           (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)
             (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V)))
           s ub)))
(∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (f :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
  (hf :
    @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V))
      (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V))
      f)
  (S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
  (hS : @Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   α V) S)
  (hfix :
    ∀ (s : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
      @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   α V)
        (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
        (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)) S s →
        @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (f s
 ) s)
  {s : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
  @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
 )
    (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
    (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)) S s →
    @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
```

```
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   α V)
       (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.optimalFix α V f hf S
  hS hfix) s) :=
@And.intro
(And
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
    @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V))
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V))
       f →
      ∀ (S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
  )
       (hS : @Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V) S),
       (∀ (s : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
           @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V)
             (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
  α V))
             (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)) S s →
          @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
  ) (f s) s) →
        @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V)
            (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α V)))
          (f (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sInf α V S hS)
  )
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sInf α V S hS))
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
    (hf :
      @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
```

```
 NeighborhoodSystem.Element α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V))
       (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V))
       f)
   (S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
   (hS : @Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V) S)
   (hfix :
     ∀ (s : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
       @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)
           (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
 )
           (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)) S s →
         @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (f
  s) s)
   {s : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
   @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
  V)
       (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
       (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)) S s →
     ∃ (ub : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
       And
         (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
 )
           (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)
             (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V)))
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.optimalFix α V f
 hf S hS hfix) ub)
         (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
 )
           (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)
             (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V)))
           s ub)))
(∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (f :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
  (hf :
    @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
      (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
```

```
 NeighborhoodSystem.Element α V)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V))
     (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V))
     f)
  (S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
  (hS : @Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
  α V) S)
  (hfix :
    ∀ (s : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
      @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
  α V)
         (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
         (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)) S s →
       @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (f s
 ) s)
  {s : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
  @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
 )
     (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
     (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V)) S s →
   @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
     (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
  α V)
       (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V)))
     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.optimalFix α V f hf S
 hS hfix) s)
(@And.intro
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (f :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
   @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
       (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V))
       (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α V))
       f →
     ∀ (S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
 )
       (hS : @Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α V) S),
       (∀ (s : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
```

```
          @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V)
              (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
α V))
              (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)) S s →
            @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
) (f s) s) →
        @LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V)
            (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α V)))
          (f (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sInf α V S hS)
)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sInf α V S hS))
 (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
   (f :
     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V →
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
   (hf :
     @Monotone (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
       (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α V))
       (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α V))
       f)
   (S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
   (hS : @Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V) S)
   (hfix :
     ∀ (s : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
       @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V)
          (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
)
          (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)) S s →
        @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V) (f
 s) s)
   {s : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V},
   @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
 V)
       (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V))
       (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V)) S s →
     ∃ (ub : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
       And
         (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
```

```
    )
              (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V)
                (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.optimalFix α V f
    hf S hS hfix) ub)
            (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
    )
              (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V)
                (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
              s ub))
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.f_sInf_le
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.optimalFix_consistent)
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.optimalFix_le
end

end DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
end
```

3.5.19 Exercise 4.17 — generated submonoid

(For algebraists). Suppose $\langle S, 1, \cdot \rangle$ is a semi-group with unit (sometimes called a monoid). Remark that PS is a domain. For $a, b \in S$, what is the least $x \in PS$ such that

$$x = \{1\} \cup \{a, b\} \cup x \cdot x,$$

where in general for $x, y \subseteq S$

$$x \cdot y = \{t \cdot u \mid t \in x \text{ and } u \in y\}?$$

Need the fixed point be unique?

Exercise_4_17.lean

```
module

public import Mathlib.Algebra.Group.Nat.Defs
public import Mathlib.Algebra.Group.Pointwise.Set.Basic
public import Mathlib.Algebra.Group.Submonoid.Basic
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_14

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise417
open Pointwise
open DomainTheory.NeighbourhoodSystems.Exercise414
```

```
section
variable {S : Type*} [Monoid S]

def F (a b : S) (x : Set S) : Set S := {1} ∪ {a, b} ∪ x * x

theorem base_subset_F (a b : S) (x : Set S) : {1} ∪ {a, b} ⊆ F a b x :=
  Set.subset_union_left

theorem one_mem_F (a b : S) (x : Set S) : (1 : S) ∈ F a b x :=
  base_subset_F a b x (Set.mem_union_left _ rfl)

theorem self_mul_subset_F (a b : S) (x : Set S) : x * x ⊆ F a b x :=
  Set.subset_union_right

def preFixSubmonoid (a b : S) {x : Set S} (hx : F a b x ⊆ x) : Submonoid S where
  carrier := x
  one_mem' := hx (one_mem_F a b x)
  mul_mem' := by
    intro s t hs ht
    exact hx (self_mul_subset_F a b x (Set.mul_mem_mul hs ht))

theorem F_monotone (a b : S) : Monotone (F a b) := by
  intro x y hxy
  exact Set.union_subset_union (le_refl _) (Set.mul_subset_mul hxy hxy)

theorem F_one_one_singleton : F (1 : ℕ) 1 ({1} : Set ℕ) = {1} := by
  unfold F
  rw [Set.singleton_mul_singleton]
  simp

theorem F_univ (a b : S) : F a b (Set.univ : Set S) = Set.univ := by
  apply Set.Subset.antisymm (Set.subset_univ _)
  intro s _
  exact self_mul_subset_F a b _ (Set.mem_mul.mpr ⟨1, trivial, s, trivial, one_mul s⟩)

theorem a_mem_F (a b : S) (x : Set S) : a ∈ F a b x :=
  base_subset_F a b x (Set.mem_union_right _ (Set.mem_insert _ _))

theorem b_mem_F (a b : S) (x : Set S) : b ∈ F a b x :=
  base_subset_F a b x (Set.mem_union_right _ (Set.mem_insert_of_mem _ rfl))
end
end DomainTheory.NeighbourhoodSystems.Exercise417

section
namespace DomainTheory.NeighbourhoodSystems.Exercise417
open Pointwise
open DomainTheory.NeighbourhoodSystems.Exercise414
section
variable {S : Type*} [Monoid S]

theorem fixedPoint_not_unique :
    ∃ x y : Set ℕ, F 1 1 x = x ∧ F 1 1 y = y ∧ x = y := by
  refine ⟨{1}, Set.univ, F_one_one_singleton, F_univ 1 1, ?_⟩
  intro h
  have h2 : (2 : ℕ) ∈ ({1} : Set ℕ) := by rw [h]; exact Set.mem_univ 2
  simp at h2
```

```
theorem leastSolution_eq (a b : S) :
    F a b (lfpSet (F a b)) = lfpSet (F a b) :=
  lfpSet_isFixed (F a b) (F_monotone a b)

theorem lfpSet_eq_closure (a b : S) :
    lfpSet (F a b) = (Submonoid.closure ({a, b} : Set S) : Set S) := by
  apply Set.Subset.antisymm
  ·
    have hclosed : F a b (Submonoid.closure ({a, b} : Set S)) ⊆
        (Submonoid.closure ({a, b} : Set S) : Set S) := by
      apply Set.union_subset
      · apply Set.union_subset
        · rintro s rfl; exact (Submonoid.closure ({a, b} : Set S)).one_mem
        · intro s hs
          rcases hs with rfl | rfl
          · exact Submonoid.subset_closure (Set.mem_insert _ _)
          · exact Submonoid.subset_closure (Set.mem_insert_of_mem _ rfl)
      · rintro s ⟨t, ht, u, hu, rfl⟩
        exact (Submonoid.closure ({a, b} : Set S)).mul_mem ht hu
    exact lfpSet_subset (F a b) hclosed
  ·
    have hfix : F a b (lfpSet (F a b)) ⊆ lfpSet (F a b) :=
      le_of_eq (leastSolution_eq a b)
    have ha : a ∈ lfpSet (F a b) := hfix (a_mem_F a b _)
    have hb : b ∈ lfpSet (F a b) := hfix (b_mem_F a b _)
    have hmem : ({a, b} : Set S) ⊆ lfpSet (F a b) := by
      intro s hs
      rcases Set.mem_insert_iff.mp hs with h | h
      · rw [h]; exact ha
      · rw [Set.mem_singleton_iff.mp h]; exact hb
    exact (Submonoid.closure_le (S := preFixSubmonoid a b hfix)).mpr hmem

end

section
set_option linter.unusedVariables false

theorem example_417.{u_1} : And
  (∃ (x : Set Nat) (y : Set Nat),
    And
      (@Eq (Set Nat)
        (@DomainTheory.NeighbourhoodSystems.Exercise417.F Nat Nat.instMonoid
          (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
          (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x)
        x)
      (And
        (@Eq (Set Nat)
          (@DomainTheory.NeighbourhoodSystems.Exercise417.F Nat Nat.instMonoid
            (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
            (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) y)
          y)
        (@Ne (Set Nat) x y)))
  (∀ {S : Type u_1} [inst : Monoid S] (a b : S),
    @Eq (Set S)
      (@DomainTheory.NeighbourhoodSystems.Exercise414.lfpSet S
```

```
        (@DomainTheory.NeighbourhoodSystems.Exercise417.F S inst a b))
      (@SetLike.coe (@Submonoid S (@Monoid.toMulOneClass S inst)) S
        (@Submonoid.instSetLike S (@Monoid.toMulOneClass S inst))
        (@Submonoid.closure S (@Monoid.toMulOneClass S inst)
          (@Insert.insert S (Set S) (@Set.instInsert S) a
            (@Singleton.singleton S (Set S) (@Set.instSingletonSet S) b))))) :=
  @And.intro
  (∃ (x : Set Nat) (y : Set Nat),
    And
      (@Eq (Set Nat)
        (@DomainTheory.NeighbourhoodSystems.Exercise417.F Nat Nat.instMonoid
          (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
          (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x)
        x)
      (And
        (@Eq (Set Nat)
          (@DomainTheory.NeighbourhoodSystems.Exercise417.F Nat Nat.instMonoid
            (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
            (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) y)
          y)
        (@Ne (Set Nat) x y)))
  (∀ {S : Type u_1} [inst : Monoid S] (a b : S),
    @Eq (Set S)
      (@DomainTheory.NeighbourhoodSystems.Exercise414.lfpSet S
        (@DomainTheory.NeighbourhoodSystems.Exercise417.F S inst a b))
      (@SetLike.coe (@Submonoid S (@Monoid.toMulOneClass S inst)) S
        (@Submonoid.instSetLike S (@Monoid.toMulOneClass S inst))
        (@Submonoid.closure S (@Monoid.toMulOneClass S inst)
          (@Insert.insert S (Set S) (@Set.instInsert S) a
            (@Singleton.singleton S (Set S) (@Set.instSingletonSet S) b)))))
  DomainTheory.NeighbourhoodSystems.Exercise417.fixedPoint_not_unique
  @DomainTheory.NeighbourhoodSystems.Exercise417.lfpSet_eq_closure
end

end DomainTheory.NeighbourhoodSystems.Exercise417
end
```

3.5.20 Exercise 4.18 — checking the number domain

In Example 4.3 there are many unproved assertions about N and F. These should be checked. In particular, the isomorphism theorem of 4.6 could be proved by constructing a simple domain M from $\mathbf{M}$ in the way N is constructed from $\mathbf{N}$.

Exercise_4_18.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Example_4_3

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise418
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap Example43
```

```
section

theorem singleton_inter_eq_empty {n m : ℕ} (hmn : m = n) :
    ({n} : Set ℕ) ∩ {m} = ∅ := by
  ext k
  simp only [Set.mem_inter_iff, Set.mem_singleton_iff, Set.mem_empty_iff_false,
    iff_false, not_and]
  rintro rfl h2
  exact hmn h2.symm
end

end DomainTheory.NeighbourhoodSystems.Exercise418

section
namespace DomainTheory.NeighbourhoodSystems.Exercise418
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap Example43
section

theorem natElem_injective {n m : ℕ} (h : natElem n = natElem m) : n = m := by
  have hmem : (natElem m).mem {n} := h ▸ (mem_natElem_iff.mpr (Or.inr rfl))
  rw [mem_natElem_iff] at hmem
  rcases hmem with hu | hs
  · exact absurd hu (singleton_ne_univ n)
  · exact singleton_nat_inj hs
end

section

theorem natElem_zero_ne_succ (k : ℕ) : natElem 0 = natElem (k + 1) := fun h =>
  Nat.succ_ne_zero k (natElem_injective h).symm
end

section

theorem not_N_mem_empty : ¬ N.mem (∅ : Set ℕ) := by
  rw [N_mem]
  rintro (h | ⟨n, h⟩)
  · exact Set.empty_ne_univ h
  · exact (Set.singleton_ne_empty n) h.symm
end

section

theorem element_classification (x : N.Element) :
    x = N.bot ∨ ∃ n, x = natElem n := by
  by_cases h : ∃ n, x.mem {n}
  · obtain ⟨n, hn⟩ := h
    refine Or.inr ⟨n, ?_⟩
    apply Element.ext
    intro Y
    rw [mem_natElem_iff]
    constructor
    · intro hY
      rcases N_mem.mp (x.sub hY) with rfl | ⟨m, rfl⟩
      · exact Or.inl rfl
      · by_cases hmn : m = n
```

```
        · subst hmn; exact Or.inr rfl
        · exfalso
          have hmem := x.inter_mem hn hY
          rw [singleton_inter_eq_empty hmn] at hmem
          exact not_N_mem_empty (x.sub hmem)
    · rintro (rfl | rfl)
      · exact x.master_mem
      · exact hn
  · refine Or.inl ?_
    apply Element.ext
    intro Y
    rw [N_bot_mem]
    constructor
    · intro hY
      rcases N_mem.mp (x.sub hY) with rfl | ⟨m, rfl⟩
      · rfl
      · exact absurd hY (fun hm => h ⟨m, hm⟩)
    · rintro rfl
      exact x.master_mem
end

section

theorem succMap_injective {n m : ℕ}
    (h : succMap.toElementMap (natElem n) = succMap.toElementMap (natElem m)) : n = m
    := by
  rw [succMap_natElem, succMap_natElem] at h
  have := natElem_injective h
  omega
end

section

theorem zero_ne_succMap (n : ℕ) : natElem 0 = succMap.toElementMap (natElem n) := by
  rw [succMap_natElem]
  exact natElem_zero_ne_succ n
end

section
set_option linter.unusedVariables false

theorem example_418 : And
  (And
    (And
      (And
        (∀
          (x :
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
              DomainTheory.NeighbourhoodSystems.Example43.N),
          Or
            (@Eq
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
                DomainTheory.NeighbourhoodSystems.Example43.N)
              x
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot Nat
                DomainTheory.NeighbourhoodSystems.Example43.N))
```

```
          (∃ (n : Nat),
            @Eq
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
                DomainTheory.NeighbourhoodSystems.Example43.N)
              x (DomainTheory.NeighbourhoodSystems.Example43.natElem n)))
      (∀ {n m : Nat},
        @Eq
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
              DomainTheory.NeighbourhoodSystems.Example43.N)
            (DomainTheory.NeighbourhoodSystems.Example43.natElem n)
            (DomainTheory.NeighbourhoodSystems.Example43.natElem m) →
          @Eq Nat n m))
    (∀ (k : Nat),
      @Ne
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
          DomainTheory.NeighbourhoodSystems.Example43.N)
        (DomainTheory.NeighbourhoodSystems.Example43.natElem
          (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))))
        (DomainTheory.NeighbourhoodSystems.Example43.natElem
          (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) k
            (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))))))
  (∀ {n m : Nat},
    @Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
          DomainTheory.NeighbourhoodSystems.Example43.N)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap Nat Nat
          DomainTheory.NeighbourhoodSystems.Example43.N DomainTheory.
  NeighbourhoodSystems.Example43.N
          DomainTheory.NeighbourhoodSystems.Example43.succMap (DomainTheory.
  NeighbourhoodSystems.Example43.natElem n))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap Nat Nat
          DomainTheory.NeighbourhoodSystems.Example43.N DomainTheory.
  NeighbourhoodSystems.Example43.N
          DomainTheory.NeighbourhoodSystems.Example43.succMap
          (DomainTheory.NeighbourhoodSystems.Example43.natElem m)) →
      @Eq Nat n m))
(∀ (n : Nat),
  @Ne
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat DomainTheory.
  NeighbourhoodSystems.Example43.N)
    (DomainTheory.NeighbourhoodSystems.Example43.natElem (@OfNat.ofNat Nat (nat_lit
  0) (instOfNatNat (nat_lit 0))))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap Nat Nat
      DomainTheory.NeighbourhoodSystems.Example43.N DomainTheory.
  NeighbourhoodSystems.Example43.N
      DomainTheory.NeighbourhoodSystems.Example43.succMap (DomainTheory.
  NeighbourhoodSystems.Example43.natElem n))) :=
@And.intro
(And
  (And
    (And
      (∀
        (x :
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
            DomainTheory.NeighbourhoodSystems.Example43.N),
        Or
```

```
          (@Eq
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
              DomainTheory.NeighbourhoodSystems.Example43.N)
            x
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot Nat
              DomainTheory.NeighbourhoodSystems.Example43.N))
          (∃ (n : Nat),
            @Eq
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
                DomainTheory.NeighbourhoodSystems.Example43.N)
              x (DomainTheory.NeighbourhoodSystems.Example43.natElem n)))
      (∀ {n m : Nat},
        @Eq
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
              DomainTheory.NeighbourhoodSystems.Example43.N)
            (DomainTheory.NeighbourhoodSystems.Example43.natElem n)
            (DomainTheory.NeighbourhoodSystems.Example43.natElem m) →
          @Eq Nat n m))
    (∀ (k : Nat),
      @Ne
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
          DomainTheory.NeighbourhoodSystems.Example43.N)
        (DomainTheory.NeighbourhoodSystems.Example43.natElem
          (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))))
        (DomainTheory.NeighbourhoodSystems.Example43.natElem
          (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) k
            (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))))))
  (∀ {n m : Nat},
    @Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
          DomainTheory.NeighbourhoodSystems.Example43.N)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap Nat Nat
          DomainTheory.NeighbourhoodSystems.Example43.N DomainTheory.
 NeighbourhoodSystems.Example43.N
          DomainTheory.NeighbourhoodSystems.Example43.succMap (DomainTheory.
 NeighbourhoodSystems.Example43.natElem n))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap Nat Nat
          DomainTheory.NeighbourhoodSystems.Example43.N DomainTheory.
 NeighbourhoodSystems.Example43.N
          DomainTheory.NeighbourhoodSystems.Example43.succMap
          (DomainTheory.NeighbourhoodSystems.Example43.natElem m)) →
      @Eq Nat n m))
(∀ (n : Nat),
  @Ne
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat DomainTheory.
 NeighbourhoodSystems.Example43.N)
    (DomainTheory.NeighbourhoodSystems.Example43.natElem (@OfNat.ofNat Nat (nat_lit
 0) (instOfNatNat (nat_lit 0))))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap Nat Nat
      DomainTheory.NeighbourhoodSystems.Example43.N DomainTheory.
 NeighbourhoodSystems.Example43.N
      DomainTheory.NeighbourhoodSystems.Example43.succMap (DomainTheory.
 NeighbourhoodSystems.Example43.natElem n)))
(@And.intro
  (And
    (And
```

```
    (∀
      (x :
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
         DomainTheory.NeighbourhoodSystems.Example43.N),
       Or
         (@Eq
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
             DomainTheory.NeighbourhoodSystems.Example43.N)
           x
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot Nat
             DomainTheory.NeighbourhoodSystems.Example43.N))
         (∃ (n : Nat),
           @Eq
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
               DomainTheory.NeighbourhoodSystems.Example43.N)
             x (DomainTheory.NeighbourhoodSystems.Example43.natElem n)))
    (∀ {n m : Nat},
      @Eq
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
            DomainTheory.NeighbourhoodSystems.Example43.N)
          (DomainTheory.NeighbourhoodSystems.Example43.natElem n)
          (DomainTheory.NeighbourhoodSystems.Example43.natElem m) →
        @Eq Nat n m))
  (∀ (k : Nat),
    @Ne
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
        DomainTheory.NeighbourhoodSystems.Example43.N)
      (DomainTheory.NeighbourhoodSystems.Example43.natElem
        (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))))
      (DomainTheory.NeighbourhoodSystems.Example43.natElem
        (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) k
          (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))))))
(∀ {n m : Nat},
  @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
        DomainTheory.NeighbourhoodSystems.Example43.N)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap Nat Nat
        DomainTheory.NeighbourhoodSystems.Example43.N DomainTheory.
NeighbourhoodSystems.Example43.N
        DomainTheory.NeighbourhoodSystems.Example43.succMap (DomainTheory.
NeighbourhoodSystems.Example43.natElem n))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap Nat Nat
        DomainTheory.NeighbourhoodSystems.Example43.N DomainTheory.
NeighbourhoodSystems.Example43.N
        DomainTheory.NeighbourhoodSystems.Example43.succMap
        (DomainTheory.NeighbourhoodSystems.Example43.natElem m)) →
    @Eq Nat n m)
(@And.intro
  (And
    (∀
      (x :
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
         DomainTheory.NeighbourhoodSystems.Example43.N),
       Or
         (@Eq
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
```

```
              DomainTheory.NeighbourhoodSystems.Example43.N)
            x
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot Nat
              DomainTheory.NeighbourhoodSystems.Example43.N))
          (∃ (n : Nat),
            @Eq
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
                DomainTheory.NeighbourhoodSystems.Example43.N)
              x (DomainTheory.NeighbourhoodSystems.Example43.natElem n)))
        (∀ {n m : Nat},
          @Eq
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
                DomainTheory.NeighbourhoodSystems.Example43.N)
              (DomainTheory.NeighbourhoodSystems.Example43.natElem n)
              (DomainTheory.NeighbourhoodSystems.Example43.natElem m) →
            @Eq Nat n m))
      (∀ (k : Nat),
        @Ne
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
            DomainTheory.NeighbourhoodSystems.Example43.N)
          (DomainTheory.NeighbourhoodSystems.Example43.natElem
            (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))))
          (DomainTheory.NeighbourhoodSystems.Example43.natElem
            (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) k
              (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))))
      (@And.intro
        (∀
          (x :
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
              DomainTheory.NeighbourhoodSystems.Example43.N),
          Or
            (@Eq
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
                DomainTheory.NeighbourhoodSystems.Example43.N)
              x
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot Nat
                DomainTheory.NeighbourhoodSystems.Example43.N))
            (∃ (n : Nat),
              @Eq
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
                  DomainTheory.NeighbourhoodSystems.Example43.N)
                x (DomainTheory.NeighbourhoodSystems.Example43.natElem n)))
        (∀ {n m : Nat},
          @Eq
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element Nat
                DomainTheory.NeighbourhoodSystems.Example43.N)
              (DomainTheory.NeighbourhoodSystems.Example43.natElem n)
              (DomainTheory.NeighbourhoodSystems.Example43.natElem m) →
            @Eq Nat n m)
        DomainTheory.NeighbourhoodSystems.Exercise418.element_classification
        @DomainTheory.NeighbourhoodSystems.Exercise418.natElem_injective)
      DomainTheory.NeighbourhoodSystems.Exercise418.natElem_zero_ne_succ)
    @DomainTheory.NeighbourhoodSystems.Exercise418.succMap_injective)
  DomainTheory.NeighbourhoodSystems.Exercise418.zero_ne_succMap
end
```

```
end DomainTheory.NeighbourhoodSystems.Exercise418
end
```

3.5.21 Exercise 4.19 — Peano axioms for sequences

There are many unproved assertions in Example 4.4! In particular discuss "Peano's Axioms" for $\{0,1\}^*$. Show, moreover, that $\mathrm{one} : C \to T$ can be defined from the rest of the structure by a fixed-point equation.

Exercise_4_19.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Example_4_4
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise419
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap ExampleB
    Example44

section
variable {β : Type*}

notation "?" => Example23.trueElt

notation "?" => Example23.falseElt

def headValC (V : NeighborhoodSystem β) (z a0 a1 : V.Element) : Str → V.Element
  | [] => z
  | false :: _ => a0
  | true :: _ => a1

@[simp] theorem headValC_nil (V : NeighborhoodSystem β) (z a0 a1 : V.Element) :
    headValC V z a0 a1 [] = z := rfl

@[simp] theorem headValC_false (V : NeighborhoodSystem β) (z a0 a1 : V.Element) (σ :
    Str) :
    headValC V z a0 a1 (false :: σ) = a0 := rfl

@[simp] theorem headValC_true (V : NeighborhoodSystem β) (z a0 a1 : V.Element) (σ :
    Str) :
    headValC V z a0 a1 (true :: σ) = a1 := rfl

abbrev T : NeighborhoodSystem Example12.Token := Example23.T

theorem headValC_bot_le (V : NeighborhoodSystem β) (z' a0 a1 : V.Element) {σ τ : Str}
    (h : σ <+: τ) : headValC V V.bot a0 a1 σ ≤ headValC V z' a0 a1 τ := by
  cases σ with
  | nil => exact bot_le
  | cons b σ0 =>
```

```
    obtain ⟨s, rfl⟩ := h
    cases b
    · rw [List.cons_append]; exact le_of_eq rfl
    · rw [List.cons_append]; exact le_of_eq rfl
end

section

theorem not_cone_subset_singleton (τ σ : Str) : ¬ cone τ ⊆ ({σ} : Set Str) := by
  intro h
  have h1 : τ ∈ ({σ} : Set Str) := h (by simp [mem_cone])
  have h2 : (τ ++ [true]) ∈ ({σ} : Set Str) := h (by simp [mem_cone])
  rw [Set.mem_singleton_iff] at h1 h2
  have : τ = τ ++ [true] := h1.trans h2.symm
  simp at this
end

section

theorem cone_ne_singleton (τ σ : Str) : cone τ = ({σ} : Set Str) := by
  intro h
  exact not_cone_subset_singleton τ σ (h ▶ subset_rfl)
end

section
variable {β : Type*}

def liftC (V : NeighborhoodSystem β) (coneVal singVal : Str → V.Element)
    (hcone : ∀ {σ τ : Str}, σ <+: τ → coneVal σ ≤ coneVal τ)
    (hsing : ∀ {σ τ : Str}, σ <+: τ → coneVal σ ≤ singVal τ) :
    ApproximableMap C V where
  rel X Y := (∃ σ, X = cone σ ∧ (coneVal σ).mem Y) ∨ (∃ σ, X = {σ} ∧ (singVal σ).mem Y
    )
  rel_dom := by
    rintro X Y (⟨σ, rfl, _⟩ | ⟨σ, rfl, _⟩)
    · exact memC_cone σ
    · exact memC_singleton σ
  rel_cod := by
    rintro X Y (⟨σ, _, hY⟩ | ⟨σ, _, hY⟩)
    · exact (coneVal σ).sub hY
    · exact (singVal σ).sub hY
  master_rel := by
    refine Or.inl ⟨[], ?_, (coneVal []).master_mem⟩
    rw [C_master]; exact cone_nil.symm
  inter_right := by
    rintro X Y Y' (⟨σ, rfl, hY⟩ | ⟨σ, rfl, hY⟩) (⟨σ', hX', hY'⟩ | ⟨σ', hX', hY'⟩)
    · have : σ = σ' := cone_injective hX'
      subst this
      exact Or.inl ⟨σ, rfl, (coneVal σ).inter_mem hY hY'⟩
    · exact absurd hX' (cone_ne_singleton σ σ')
    · exact absurd hX'.symm (cone_ne_singleton σ' σ)
    · have : σ = σ' := by rw [Set.singleton_eq_singleton_iff] at hX'; exact hX'
      subst this
      exact Or.inr ⟨σ, rfl, (singVal σ).inter_mem hY hY'⟩
  mono := by
    rintro X X' Y Y' (⟨σ, rfl, hY⟩ | ⟨σ, rfl, hY⟩) hX'X hYY' hX' hY'
```

```
    .
      rcases hX' with ⟨τ, rfl⟩ | ⟨τ, rfl⟩
      .
        have hpre : σ <+: τ := cone_subset_cone.mp hX'X
        exact Or.inl ⟨τ, rfl, (coneVal τ).up_mem (hcone hpre Y hY) hY' hYY'⟩
      .
        have hpre : σ <+: τ := singleton_subset_cone.mp hX'X
        exact Or.inr ⟨τ, rfl, (singVal τ).up_mem (hsing hpre Y hY) hY' hYY'⟩
    .
      rcases hX' with ⟨τ, rfl⟩ | ⟨τ, rfl⟩
      · exact absurd hX'X (not_cone_subset_singleton τ σ)
      · have hτσ : τ = σ := by
          have := Set.singleton_subset_iff.mp hX'X
          rwa [Set.mem_singleton_iff] at this
        subst hτσ
        exact Or.inr ⟨τ, rfl, (singVal τ).up_mem hY hY' hYY'⟩

def emptyMap : ApproximableMap C T :=
  liftC T (headValC T T.bot ? ?) (headValC T ? ? ?)
    (headValC_bot_le T T.bot ? ?) (headValC_bot_le T ? ? ?)

theorem liftC_strBot (V : NeighborhoodSystem β) (coneVal singVal : Str → V.Element)
    (hcone : ∀ {σ τ : Str}, σ <+: τ → coneVal σ ≤ coneVal τ)
    (hsing : ∀ {σ τ : Str}, σ <+: τ → coneVal σ ≤ singVal τ) (σ : Str) :
    (liftC V coneVal singVal hcone hsing).toElementMap (strBot σ) = coneVal σ := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨X, ⟨_, hsub⟩, hrel⟩
    rcases hrel with ⟨σ', hXcone, hY⟩ | ⟨σ', hXsing, hY⟩
    · have hpre : σ' <+: σ := cone_subset_cone.mp (hXcone ▸ hsub)
      exact hcone hpre Y hY
    · exact absurd (hXsing ▸ hsub) (not_cone_subset_singleton σ σ')
  · intro hY
    exact ⟨cone σ, ⟨memC_cone σ, subset_rfl⟩, Or.inl ⟨σ, rfl, hY⟩⟩

theorem liftC_strElem (V : NeighborhoodSystem β) (coneVal singVal : Str → V.Element)
    (hcone : ∀ {σ τ : Str}, σ <+: τ → coneVal σ ≤ coneVal τ)
    (hsing : ∀ {σ τ : Str}, σ <+: τ → coneVal σ ≤ singVal τ) (σ : Str) :
    (liftC V coneVal singVal hcone hsing).toElementMap (strElem σ) = singVal σ := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨X, ⟨_, hsub⟩, hrel⟩
    rcases hrel with ⟨σ', hXcone, hY⟩ | ⟨σ', hXsing, hY⟩
    · have hpre : σ' <+: σ := by
        apply singleton_subset_cone.mp
        rw [← hXcone]; exact hsub
      exact hsing hpre Y hY
    · have hσσ' : σ = σ' := by
        have := Set.singleton_subset_iff.mp (hXsing ▸ hsub)
        rwa [Set.mem_singleton_iff] at this
      subst hσσ'; exact hY
  · intro hY
    exact ⟨{σ}, ⟨memC_singleton σ, subset_rfl⟩, Or.inr ⟨σ, rfl, hY⟩⟩
```

```
@[simp] theorem emptyMap_strElem (σ : Str) :
    emptyMap.toElementMap (strElem σ) = headValC T ? ? ? σ :=
  liftC_strElem T (headValC T T.bot ? ?) (headValC T ? ? ?)
    (headValC_bot_le T T.bot ? ?) (headValC_bot_le T ? ? ?) σ

@[simp] theorem emptyMap_strBot (σ : Str) :
    emptyMap.toElementMap (strBot σ) = headValC T T.bot ? ? σ :=
  liftC_strBot T (headValC T T.bot ? ?) (headValC T ? ? ?)
    (headValC_bot_le T T.bot ? ?) (headValC_bot_le T ? ? ?) σ

def oneMap : ApproximableMap C T :=
  liftC T (headValC T T.bot ? ?) (headValC T ? ? ?)
    (headValC_bot_le T T.bot ? ?) (headValC_bot_le T ? ? ?)

def zeroMap : ApproximableMap C T :=
  liftC T (headValC T T.bot ? ?) (headValC T ? ? ?)
    (headValC_bot_le T T.bot ? ?) (headValC_bot_le T ? ? ?)

@[simp] theorem zeroMap_strElem (σ : Str) :
    zeroMap.toElementMap (strElem σ) = headValC T ? ? ? σ :=
  liftC_strElem T (headValC T T.bot ? ?) (headValC T ? ? ?)
    (headValC_bot_le T T.bot ? ?) (headValC_bot_le T ? ? ?) σ

@[simp] theorem zeroMap_strBot (σ : Str) :
    zeroMap.toElementMap (strBot σ) = headValC T T.bot ? ? σ :=
  liftC_strBot T (headValC T T.bot ? ?) (headValC T ? ? ?)
    (headValC_bot_le T T.bot ? ?) (headValC_bot_le T ? ? ?) σ

@[simp] theorem oneMap_strElem (σ : Str) :
    oneMap.toElementMap (strElem σ) = headValC T ? ? ? σ :=
  liftC_strElem T (headValC T T.bot ? ?) (headValC T ? ? ?)
    (headValC_bot_le T T.bot ? ?) (headValC_bot_le T ? ? ?) σ

@[simp] theorem oneMap_strBot (σ : Str) :
    oneMap.toElementMap (strBot σ) = headValC T T.bot ? ? σ :=
  liftC_strBot T (headValC T T.bot ? ?) (headValC T ? ? ?)
    (headValC_bot_le T T.bot ? ?) (headValC_bot_le T ? ? ?) σ

def oneDef (x : C.Element) : T.Element :=
  (Exercise326.cond T).toElementMap
    (pair (emptyMap.toElementMap x)
      (pair ?
        ((Exercise326.cond T).toElementMap (pair (zeroMap.toElementMap x) (pair ? ?)))
   ))

theorem condT_bot (x y : T.Element) :
    (Exercise326.cond T).toElementMap (pair T.bot (pair x y)) = T.bot := by
  apply Element.ext
  intro Z
  rw [Exercise326.cond_toElementMap_mem]
  constructor
  · rintro (⟨h0, _⟩ | ⟨h1, _⟩ | rfl)
    · rw [NeighborhoodSystem.mem_bot] at h0; exact absurd h0 Exercise326.zero_ne_master
    · rw [NeighborhoodSystem.mem_bot] at h1; exact absurd h1 Exercise326.one_ne_master
    · exact T.bot.master_mem
  · intro h
```

```
    rw [NeighborhoodSystem.mem_bot] at h
    exact Or.inr (Or.inr h)
end
end DomainTheory.NeighbourhoodSystems.Exercise419

section
namespace DomainTheory.NeighbourhoodSystems.Exercise419
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap ExampleB
    Example44
section
variable {β : Type*}

theorem one_def_strBot (σ : Str) : oneMap.toElementMap (strBot σ) = oneDef (strBot σ)
    := by
  cases σ with
  | nil =>
    rw [oneDef, emptyMap_strBot, headValC_nil, condT_bot, oneMap_strBot, headValC_nil]
  | cons b σ0 =>
    cases b with
    | false =>
      rw [oneDef, emptyMap_strBot, headValC_false, Exercise326.cond_false,
        zeroMap_strBot, headValC_false, Exercise326.cond_true, oneMap_strBot,
    headValC_false]
    | true =>
      rw [oneDef, emptyMap_strBot, headValC_true, Exercise326.cond_false,
        zeroMap_strBot, headValC_true, Exercise326.cond_false, oneMap_strBot,
    headValC_true]

theorem one_def_strElem (σ : Str) : oneMap.toElementMap (strElem σ) = oneDef (strElem
    σ) := by
  cases σ with
  | nil =>

    rw [oneDef, emptyMap_strElem, headValC_nil, Exercise326.cond_true,
      oneMap_strElem, headValC_nil]
  | cons b σ0 =>
    cases b with
    | false =>

      rw [oneDef, emptyMap_strElem, headValC_false, Exercise326.cond_false,
        zeroMap_strElem, headValC_false, Exercise326.cond_true, oneMap_strElem,
    headValC_false]
    | true =>
      rw [oneDef, emptyMap_strElem, headValC_true, Exercise326.cond_false,
        zeroMap_strElem, headValC_true, Exercise326.cond_false, oneMap_strElem,
    headValC_true]

end

section

theorem peano_cons_disjoint (σ τ : Str) : (false :: σ) = (true :: τ) := by
  simp
end

section
```

```
theorem peano_cons_injective {b : Bool} {σ τ : Str} (h : b :: σ = b :: τ) : σ = τ :=
  (List.cons.injEq b σ b τ).mp h |>.2
end

section

theorem peano_induction (P : Str → Prop) (hnil : P []) (hcons : ∀ b σ, P σ → P (b ::
    σ)) :
    ∀ σ, P σ := by
  intro σ
  induction σ with
  | nil => exact hnil
  | cons b σ ih => exact hcons b σ ih
end

section

theorem peano_nil_ne_cons (b : Bool) (σ : Str) : ([] : Str) = b :: σ := by
  simp
end

section
set_option linter.unusedVariables false

theorem example_419 : And
  (And
    (And
      (And
        (And
          (∀ (b : Bool) (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
            @Ne (List Bool) (@List.nil Bool) (@List.cons Bool b σ))
          (∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
            @Eq
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
                DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.Exercise419.T)
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
                DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
    NeighbourhoodSystems.Example12.Token
                DomainTheory.NeighbourhoodSystems.Example44.C DomainTheory.
    NeighbourhoodSystems.Exercise419.T
                DomainTheory.NeighbourhoodSystems.Exercise419.oneMap
                 (DomainTheory.NeighbourhoodSystems.Example44.strBot σ))
              (DomainTheory.NeighbourhoodSystems.Exercise419.oneDef
                (DomainTheory.NeighbourhoodSystems.Example44.strBot σ))))
        (∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
          @Eq
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
              DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.Exercise419.T)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
              DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
    NeighbourhoodSystems.Example12.Token
              DomainTheory.NeighbourhoodSystems.Example44.C DomainTheory.
    NeighbourhoodSystems.Exercise419.T
```

```
            DomainTheory.NeighbourhoodSystems.Exercise419.oneMap
            (DomainTheory.NeighbourhoodSystems.Example44.strElem σ))
          (DomainTheory.NeighbourhoodSystems.Exercise419.oneDef
            (DomainTheory.NeighbourhoodSystems.Example44.strElem σ))))
    (∀ (σ τ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
      @Ne (List Bool) (@List.cons Bool Bool.false σ) (@List.cons Bool Bool.true τ)))
  (∀ {b : Bool} {σ τ : DomainTheory.NeighbourhoodSystems.ExampleB.Str},
    @Eq (List Bool) (@List.cons Bool b σ) (@List.cons Bool b τ) →
      @Eq DomainTheory.NeighbourhoodSystems.ExampleB.Str σ τ))
(∀ (P : DomainTheory.NeighbourhoodSystems.ExampleB.Str → Prop),
  P (@List.nil Bool) →
    (∀ (b : Bool) (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str), P σ → P (
  @List.cons Bool b σ)) →
      ∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str), P σ) :=
@And.intro
(And
  (And
    (And
      (And
        (And
          (∀ (b : Bool) (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
            @Ne (List Bool) (@List.nil Bool) (@List.cons Bool b σ))
          (∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
            @Eq
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
                DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise419.T)
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
                DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.Example12.Token
                DomainTheory.NeighbourhoodSystems.Example44.C DomainTheory.
  NeighbourhoodSystems.Exercise419.T
                DomainTheory.NeighbourhoodSystems.Exercise419.oneMap
                (DomainTheory.NeighbourhoodSystems.Example44.strBot σ))
              (DomainTheory.NeighbourhoodSystems.Exercise419.oneDef
                (DomainTheory.NeighbourhoodSystems.Example44.strBot σ))))
        (∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
          @Eq
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
              DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise419.T)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
              DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.Example12.Token
              DomainTheory.NeighbourhoodSystems.Example44.C DomainTheory.
  NeighbourhoodSystems.Exercise419.T
              DomainTheory.NeighbourhoodSystems.Exercise419.oneMap
              (DomainTheory.NeighbourhoodSystems.Example44.strElem σ))
            (DomainTheory.NeighbourhoodSystems.Exercise419.oneDef
              (DomainTheory.NeighbourhoodSystems.Example44.strElem σ))))
      (∀ (σ τ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
        @Ne (List Bool) (@List.cons Bool Bool.false σ) (@List.cons Bool Bool.true τ)))
    (∀ {b : Bool} {σ τ : DomainTheory.NeighbourhoodSystems.ExampleB.Str},
      @Eq (List Bool) (@List.cons Bool b σ) (@List.cons Bool b τ) →
        @Eq DomainTheory.NeighbourhoodSystems.ExampleB.Str σ τ))
  (∀ (P : DomainTheory.NeighbourhoodSystems.ExampleB.Str → Prop),
    P (@List.nil Bool) →
```

```
    (∀ (b : Bool) (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str), P σ → P (
  @List.cons Bool b σ)) →
      ∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str), P σ)
(@And.intro
  (And
    (And
      (And
        (∀ (b : Bool) (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
          @Ne (List Bool) (@List.nil Bool) (@List.cons Bool b σ))
        (∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
          @Eq
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
              DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise419.T)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
              DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.Example12.Token
              DomainTheory.NeighbourhoodSystems.Example44.C DomainTheory.
  NeighbourhoodSystems.Exercise419.T
              DomainTheory.NeighbourhoodSystems.Exercise419.oneMap
              (DomainTheory.NeighbourhoodSystems.Example44.strBot σ))
            (DomainTheory.NeighbourhoodSystems.Exercise419.oneDef
              (DomainTheory.NeighbourhoodSystems.Example44.strBot σ))))
      (∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
            DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise419.T)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
            DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.Example12.Token
            DomainTheory.NeighbourhoodSystems.Example44.C DomainTheory.
  NeighbourhoodSystems.Exercise419.T
            DomainTheory.NeighbourhoodSystems.Exercise419.oneMap
            (DomainTheory.NeighbourhoodSystems.Example44.strElem σ))
          (DomainTheory.NeighbourhoodSystems.Exercise419.oneDef
            (DomainTheory.NeighbourhoodSystems.Example44.strElem σ))))
    (∀ (σ τ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
      @Ne (List Bool) (@List.cons Bool Bool.false σ) (@List.cons Bool Bool.true τ)))
  (∀ {b : Bool} {σ τ : DomainTheory.NeighbourhoodSystems.ExampleB.Str},
    @Eq (List Bool) (@List.cons Bool b σ) (@List.cons Bool b τ) →
      @Eq DomainTheory.NeighbourhoodSystems.ExampleB.Str σ τ)
  (@And.intro
    (And
      (And
        (∀ (b : Bool) (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
          @Ne (List Bool) (@List.nil Bool) (@List.cons Bool b σ))
        (∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
          @Eq
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
              DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise419.T)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
              DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.Example12.Token
```

```
            DomainTheory.NeighbourhoodSystems.Example44.C DomainTheory.
NeighbourhoodSystems.Exercise419.T
            DomainTheory.NeighbourhoodSystems.Exercise419.oneMap
            (DomainTheory.NeighbourhoodSystems.Example44.strBot σ))
          (DomainTheory.NeighbourhoodSystems.Exercise419.oneDef
            (DomainTheory.NeighbourhoodSystems.Example44.strBot σ))))
    (∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
      @Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
          DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise419.T)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
          DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
NeighbourhoodSystems.Example12.Token
          DomainTheory.NeighbourhoodSystems.Example44.C DomainTheory.
NeighbourhoodSystems.Exercise419.T
          DomainTheory.NeighbourhoodSystems.Exercise419.oneMap
          (DomainTheory.NeighbourhoodSystems.Example44.strElem σ))
        (DomainTheory.NeighbourhoodSystems.Exercise419.oneDef
          (DomainTheory.NeighbourhoodSystems.Example44.strElem σ))))
  (∀ (σ τ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
    @Ne (List Bool) (@List.cons Bool Bool.false σ) (@List.cons Bool Bool.true τ))
  (@And.intro
    (And
      (∀ (b : Bool) (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
        @Ne (List Bool) (@List.nil Bool) (@List.cons Bool b σ))
      (∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
            DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise419.T)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
            DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
NeighbourhoodSystems.Example12.Token
            DomainTheory.NeighbourhoodSystems.Example44.C DomainTheory.
NeighbourhoodSystems.Exercise419.T
            DomainTheory.NeighbourhoodSystems.Exercise419.oneMap
            (DomainTheory.NeighbourhoodSystems.Example44.strBot σ))
          (DomainTheory.NeighbourhoodSystems.Exercise419.oneDef
            (DomainTheory.NeighbourhoodSystems.Example44.strBot σ))))
    (∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
      @Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
          DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise419.T)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
          DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
NeighbourhoodSystems.Example12.Token
          DomainTheory.NeighbourhoodSystems.Example44.C DomainTheory.
NeighbourhoodSystems.Exercise419.T
          DomainTheory.NeighbourhoodSystems.Exercise419.oneMap
          (DomainTheory.NeighbourhoodSystems.Example44.strElem σ))
        (DomainTheory.NeighbourhoodSystems.Exercise419.oneDef
          (DomainTheory.NeighbourhoodSystems.Example44.strElem σ)))
    (@And.intro
      (∀ (b : Bool) (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
```

```
          @Ne (List Bool) (@List.nil Bool) (@List.cons Bool b σ))
        (∀ (σ : DomainTheory.NeighbourhoodSystems.ExampleB.Str),
          @Eq
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
              DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise419.T)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
              DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.Example12.Token
              DomainTheory.NeighbourhoodSystems.Example44.C DomainTheory.
  NeighbourhoodSystems.Exercise419.T
              DomainTheory.NeighbourhoodSystems.Exercise419.oneMap
              (DomainTheory.NeighbourhoodSystems.Example44.strBot σ))
            (DomainTheory.NeighbourhoodSystems.Exercise419.oneDef
              (DomainTheory.NeighbourhoodSystems.Example44.strBot σ)))
        DomainTheory.NeighbourhoodSystems.Exercise419.peano_nil_ne_cons
        DomainTheory.NeighbourhoodSystems.Exercise419.one_def_strBot)
      DomainTheory.NeighbourhoodSystems.Exercise419.one_def_strElem)
    DomainTheory.NeighbourhoodSystems.Exercise419.peano_cons_disjoint)
  @DomainTheory.NeighbourhoodSystems.Exercise419.peano_cons_injective)
DomainTheory.NeighbourhoodSystems.Exercise419.peano_induction
end

end DomainTheory.NeighbourhoodSystems.Exercise419
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

section
variable {α : Type*} {V : NeighborhoodSystem α}

namespace ApproximableMap

theorem comp_fixElement_isFixed (f g : ApproximableMap V V) :
    (f.comp g).toElementMap (f.toElementMap (g.comp f).fixElement)
      = f.toElementMap (g.comp f).fixElement := by
  rw [toElementMap_comp]

  have h : g.toElementMap (f.toElementMap (g.comp f).fixElement) = (g.comp f).
    fixElement := by
    rw [← toElementMap_comp]
    exact toElementMap_fixElement (g.comp f)
  rw [h]

end ApproximableMap
end
end DomainTheory.NeighbourhoodSystems
end
```

3.5.22 Exercise 4.20 — fix of a composite

For approximable $f, g : D \to D$ prove that

$$\mathrm{fix}(f \circ g) = f(\mathrm{fix}(g \circ f)).$$

Exercise_4_20.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_19
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_1

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α : Type*} {V : NeighborhoodSystem α}
namespace ApproximableMap

theorem fixElement_comp_comm (f g : ApproximableMap V V) :
    (f.comp g).fixElement = f.toElementMap (g.comp f).fixElement := by
  apply le_antisymm
  ·
    exact fixElement_le_of_toElementMap_le (f.comp g)
      (le_of_eq (comp_fixElement_isFixed f g))
  ·
    have hga : (g.comp f).fixElement ≤ g.toElementMap (f.comp g).fixElement := by
      apply fixElement_le_of_toElementMap_le (g.comp f)
      have : (g.comp f).toElementMap (g.toElementMap (f.comp g).fixElement)
          = g.toElementMap (f.comp g).fixElement := comp_fixElement_isFixed g f
      exact le_of_eq this

    calc f.toElementMap (g.comp f).fixElement
        ≤ f.toElementMap (g.toElementMap (f.comp g).fixElement) := f.toElementMap_mono
     hga
      _ = (f.comp g).toElementMap (f.comp g).fixElement := by rw [toElementMap_comp]
      _ = (f.comp g).fixElement := toElementMap_fixElement (f.comp g)

end ApproximableMap
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

end DomainTheory.NeighbourhoodSystems
end
```

3.5.23 Exercise 4.21 — order as a fixed point

Show that the less-than-or-equal-to relation $\ell \subseteq \mathbf{N} \times \mathbf{N}$ is uniquely determined by the fixed point equation

$$\ell = \{(n, n) \mid n \in \mathbf{N}\} \cup \{(n, m^+) \mid (n, m) \in \ell\}.$$

Consider the structured set $\langle P\mathbf{N}, \mathbf{N}, {}^+\rangle$ where, as before, $x^+ = \{n^+ \mid n \in x\}$.

What is the unique function $[\cdot] : \mathbf{N} \to P\mathbf{N}$ given by 4.13(3)? Prove that the structures $\langle \mathbf{N}, 0, {}^+ \rangle$ and $\langle [m], m, {}^+ \rangle$ are uniquely isomorphic for each $m \in \mathbf{N}$, and connect the isomorphism with ordinary addition of integers. Can the same be done for multiplication? (Hint: Consider the fixed-point equation

$$n \cdot \mathbf{N} = \{0\} \cup \{n + m \mid m \in n \cdot \mathbf{N}\},$$

where $n \in \mathbf{N}$ is fixed.)

Exercise_4_21.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_14
public import Mathlib.Algebra.Group.End
public import Mathlib.Tactic.Ring

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise421
open DomainTheory.NeighbourhoodSystems.Exercise414

section

def leOp (u : Set (ℕ × ℕ)) : Set (ℕ × ℕ) :=
  {p | p.1 = p.2} ∪ {p | ∃ m, (p.1, m) ∈ u ∧ p.2 = m + 1}
end

section

def leRel : Set (ℕ × ℕ) := {p | p.1 ≤ p.2}
end

section

def mulOp (n : ℕ) (u : Set ℕ) : Set ℕ := {0} ∪ {k | ∃ m ∈ u, k = n + m}
end

section

def succImage (x : Set ℕ) : Set ℕ := {k | ∃ j ∈ x, k = j + 1}
end

section

def upSet (m : ℕ) : Set ℕ := {k | m ≤ k}
end

end DomainTheory.NeighbourhoodSystems.Exercise421

section
namespace DomainTheory.NeighbourhoodSystems.Exercise421
open DomainTheory.NeighbourhoodSystems.Exercise414
section

def addIso (m : ℕ) : ℕ ≃ {k : ℕ // k ∈ upSet m} where
  toFun n := ⟨m + n, Nat.le_add_right m n⟩
```

```
  invFun k := k.1 - m
  left_inv n := by show m + n - m = n; omega
  right_inv := by
    rintro ⟨k, hk⟩
    exact Subtype.ext (Nat.add_sub_of_le hk)
end

section

theorem addIso_apply (m n : ℕ) : (addIso m n : ℕ) = m + n := rfl
end

section

theorem addIso_succ (m n : ℕ) : (addIso m (n + 1) : ℕ) = (addIso m n : ℕ) + 1 := by
  simp only [addIso_apply]; omega
end

section

theorem addIso_zero (m : ℕ) : (addIso m 0 : ℕ) = m := by simp [addIso]
end

section
theorem leOp_monotone : Monotone leOp := by
  intro u v huv p hp
  rcases hp with hp | ⟨m, hm, hpm⟩
  · exact Or.inl hp
  · exact Or.inr ⟨m, huv hm, hpm⟩
end

section

theorem leRel_isFixed : leOp leRel = leRel := by
  apply Set.Subset.antisymm
  · rintro ⟨n, m⟩ (h | ⟨k, hk, rfl⟩)
    · exact le_of_eq (h : n = m)
    · exact Nat.le_succ_of_le (hk : n ≤ k)
  · rintro ⟨n, m⟩ (h : n ≤ m)
    rcases Nat.eq_or_lt_of_le h with h' | h'
    · exact Or.inl h'
    · refine Or.inr ⟨m - 1, ?_, ?_⟩
      · change n ≤ m - 1; omega
      · omega
end

section

theorem mem_fixedPoint_iff {u : Set (ℕ × ℕ)} (hu : leOp u = u) (n m : ℕ) :
    (n, m) ∈ u ↔ n ≤ m := by
  induction m with
  | zero =>
    rw [← hu]
    constructor
    · rintro (h | ⟨k, _, hk⟩)
      · exact le_of_eq h
```

```
      · exact absurd hk (Nat.succ_ne_zero k).symm
    · intro h
      exact Or.inl (Nat.le_zero.mp h)
  | succ k ih =>
    rw [← hu]
    constructor
    · rintro (h | ⟨j, hj, hjk⟩)
      · exact le_of_eq h
      · have hjk' : j = k := by omega
        subst hjk'
        exact Nat.le_succ_of_le (ih.mp hj)
    · intro h
      rcases Nat.eq_or_lt_of_le h with h' | h'
      · exact Or.inl h'
      · exact Or.inr ⟨k, ih.mpr (Nat.lt_succ_iff.mp h'), rfl⟩
end

section

theorem leOp_unique {u : Set (ℕ × ℕ)} (hu : leOp u = u) : u = leRel := by
  ext ⟨n, m⟩
  rw [mem_fixedPoint_iff hu]
  rfl
end

section
theorem mulOp_monotone (n : ℕ) : Monotone (mulOp n) := by
  rintro u v huv k (hk | ⟨m, hm, rfl⟩)
  · exact Or.inl hk
  · exact Or.inr ⟨m, huv hm, rfl⟩
end

section

theorem mulOp_lfp_eq_multiples (n : ℕ) :
    lfpSet (mulOp n) = {k | ∃ i, k = n * i} := by
  apply Set.Subset.antisymm
  ·
    have hpre : mulOp n {k | ∃ i, k = n * i} ⊆ {k | ∃ i, k = n * i} := by
      rintro k (rfl | ⟨m, ⟨i, rfl⟩, rfl⟩)
      · exact ⟨0, by simp⟩
      · exact ⟨i + 1, by ring⟩
    exact lfpSet_subset (mulOp n) hpre
  ·
    have hfix : mulOp n (lfpSet (mulOp n)) = lfpSet (mulOp n) :=
      lfpSet_isFixed (mulOp n) (mulOp_monotone n)
    rintro k ⟨i, rfl⟩
    induction i with
    | zero =>
      rw [← hfix]; exact Or.inl (by simp)
    | succ j ih =>
      rw [← hfix]
      exact Or.inr ⟨n * j, ih, by ring⟩
end

section
```

```
theorem upSet_succ (m : ℕ) : upSet (m + 1) = succImage (upSet m) := by
  ext k
  simp only [upSet, succImage, Set.mem_ofPred_eq]
  constructor
  · intro h
    exact ⟨k - 1, by omega, by omega⟩
  · rintro ⟨j, hj, rfl⟩
    omega
end

section

theorem upSet_zero : upSet 0 = Set.univ := by
  ext k; simp [upSet]
end

section

theorem upSet_unique (s : ℕ → Set ℕ) (h0 : s 0 = Set.univ)
    (hsucc : ∀ m, s (m + 1) = succImage (s m)) : s = upSet := by
  funext m
  induction m with
  | zero => rw [h0, upSet_zero]
  | succ k ih => rw [hsucc k, ih, upSet_succ]
end

section
set_option linter.unusedVariables false

theorem example_421 : And
  (And
    (And
      (∀ (s : Nat → Set Nat),
        @Eq (Set Nat) (s (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))) (
    @Set.univ Nat) →
          (∀ (m : Nat),
              @Eq (Set Nat)
                (s
                  (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) m
                    (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))))
                (DomainTheory.NeighbourhoodSystems.Exercise421.succImage (s m))) →
            @Eq (Nat → Set Nat) s DomainTheory.NeighbourhoodSystems.Exercise421.upSet)
      (∀ {u : Set (Prod Nat Nat)},
        @Eq (Set (Prod Nat Nat)) (DomainTheory.NeighbourhoodSystems.Exercise421.leOp u
    ) u →
          @Eq (Set (Prod Nat Nat)) u DomainTheory.NeighbourhoodSystems.Exercise421.
    leRel))
    (@Eq (Set (Prod Nat Nat))
      (DomainTheory.NeighbourhoodSystems.Exercise421.leOp DomainTheory.
    NeighbourhoodSystems.Exercise421.leRel)
      DomainTheory.NeighbourhoodSystems.Exercise421.leRel))
  (∀ (n : Nat),
    @Eq (Set Nat)
      (@DomainTheory.NeighbourhoodSystems.Exercise414.lfpSet Nat
        (DomainTheory.NeighbourhoodSystems.Exercise421.mulOp n))
```

```
    (@Set.ofPred Nat fun (k : Nat) => ∃ (i : Nat), @Eq Nat k (@HMul.hMul Nat Nat Nat
  (@instHMul Nat instMulNat) n i))) :=
@And.intro
(And
  (And
    (∀ (s : Nat → Set Nat),
      @Eq (Set Nat) (s (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))) (
  @Set.univ Nat) →
        (∀ (m : Nat),
            @Eq (Set Nat)
              (s
                (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) m
                  (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))))
              (DomainTheory.NeighbourhoodSystems.Exercise421.succImage (s m))) →
          @Eq (Nat → Set Nat) s DomainTheory.NeighbourhoodSystems.Exercise421.upSet)
    (∀ {u : Set (Prod Nat Nat)},
      @Eq (Set (Prod Nat Nat)) (DomainTheory.NeighbourhoodSystems.Exercise421.leOp u
  ) u →
        @Eq (Set (Prod Nat Nat)) u DomainTheory.NeighbourhoodSystems.Exercise421.
  leRel))
  (@Eq (Set (Prod Nat Nat))
    (DomainTheory.NeighbourhoodSystems.Exercise421.leOp DomainTheory.
  NeighbourhoodSystems.Exercise421.leRel)
    DomainTheory.NeighbourhoodSystems.Exercise421.leRel))
(∀ (n : Nat),
  @Eq (Set Nat)
    (@DomainTheory.NeighbourhoodSystems.Exercise414.lfpSet Nat
      (DomainTheory.NeighbourhoodSystems.Exercise421.mulOp n))
    (@Set.ofPred Nat fun (k : Nat) => ∃ (i : Nat), @Eq Nat k (@HMul.hMul Nat Nat Nat
  (@instHMul Nat instMulNat) n i)))
(@And.intro
  (And
    (∀ (s : Nat → Set Nat),
      @Eq (Set Nat) (s (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))) (
  @Set.univ Nat) →
        (∀ (m : Nat),
            @Eq (Set Nat)
              (s
                (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) m
                  (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))))
              (DomainTheory.NeighbourhoodSystems.Exercise421.succImage (s m))) →
          @Eq (Nat → Set Nat) s DomainTheory.NeighbourhoodSystems.Exercise421.upSet)
    (∀ {u : Set (Prod Nat Nat)},
      @Eq (Set (Prod Nat Nat)) (DomainTheory.NeighbourhoodSystems.Exercise421.leOp u
  ) u →
        @Eq (Set (Prod Nat Nat)) u DomainTheory.NeighbourhoodSystems.Exercise421.
  leRel))
  (@Eq (Set (Prod Nat Nat))
    (DomainTheory.NeighbourhoodSystems.Exercise421.leOp DomainTheory.
  NeighbourhoodSystems.Exercise421.leRel)
    DomainTheory.NeighbourhoodSystems.Exercise421.leRel)
  (@And.intro
    (∀ (s : Nat → Set Nat),
      @Eq (Set Nat) (s (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))) (
  @Set.univ Nat) →
        (∀ (m : Nat),
```

```
              @Eq (Set Nat)
                (s
                  (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) m
                    (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))))
                (DomainTheory.NeighbourhoodSystems.Exercise421.succImage (s m))) →
            @Eq (Nat → Set Nat) s DomainTheory.NeighbourhoodSystems.Exercise421.upSet)
       (∀ {u : Set (Prod Nat Nat)},
         @Eq (Set (Prod Nat Nat)) (DomainTheory.NeighbourhoodSystems.Exercise421.leOp u
    ) u →
           @Eq (Set (Prod Nat Nat)) u DomainTheory.NeighbourhoodSystems.Exercise421.
    leRel)
      DomainTheory.NeighbourhoodSystems.Exercise421.upSet_unique
      @DomainTheory.NeighbourhoodSystems.Exercise421.leOp_unique)
    DomainTheory.NeighbourhoodSystems.Exercise421.leRel_isFixed)
  DomainTheory.NeighbourhoodSystems.Exercise421.mulOp_lfp_eq_multiples
end

end DomainTheory.NeighbourhoodSystems.Exercise421
end
```

3.5.24 Exercise 4.22 — inductive subset of a model

Suppose $\mathbf{N}^*$ is a structured set satisfying only axioms (i) and (ii) of 4.5. Must there be a subset $\mathbf{N} \subseteq \mathbf{N}^*$ that satisfies (i), (ii), and (iii)? (Hint: Use a least fixed point in $P\mathbf{N}^*$.) (For set theorists): How do we know from the axioms of set theory that there exists such a set $\mathbf{N}^*$?

Exercise_4_22.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Definition_4_5
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_14

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise422
open DomainTheory.NeighbourhoodSystems DomainTheory.NeighbourhoodSystems.Exercise414

section
variable {M : Type*} (zero : M) (succ : M → M)

def genOp (x : Set M) : Set M := {zero} ∪ succ '' x

def natPeano : PeanoModel ℕ where
  zero := 0
  succ := Nat.succ
  zero_ne_succ n := (Nat.succ_ne_zero n).symm
  succ_injective := Nat.succ_injective
  induction s h0 hstep := by
    intro n
    induction n with
    | zero => exact h0
    | succ k ih => exact hstep k ih
```

```
def nats : Set M := lfpSet (genOp zero succ)

abbrev Nat' : Type _ := {m : M // m ∈ nats zero succ}

theorem nats_induction (s : Set M) (h0 : zero ∈ s) (hsucc : ∀ n ∈ s, succ n ∈ s) :
    nats zero succ ⊆ s := by
  apply lfpSet_subset (genOp zero succ)
  rintro x (rfl | ⟨n, hn, rfl⟩)
  · exact h0
  · exact hsucc n hn

theorem succ_mem_nats {n : M} (hn : n ∈ nats zero succ) : succ n ∈ nats zero succ :=
    by
  intro x hx
  exact hx (Or.inr ⟨n, hn x hx, rfl⟩)

def subSucc (n : Nat' zero succ) : Nat' zero succ := ⟨succ n.1, succ_mem_nats zero succ
    n.2⟩

theorem zero_mem_nats : zero ∈ nats zero succ := by
  intro x hx
  exact hx (Or.inl rfl)

def subZero : Nat' zero succ := ⟨zero, zero_mem_nats zero succ⟩
end
end DomainTheory.NeighbourhoodSystems.Exercise422

section
namespace DomainTheory.NeighbourhoodSystems.Exercise422
open DomainTheory.NeighbourhoodSystems DomainTheory.NeighbourhoodSystems.Exercise414
section
variable {M : Type*} (zero : M) (succ : M → M)

def peanoSub (hzero : ∀ n, zero = succ n) (hinj : Function.Injective succ) :
    PeanoModel (Nat' zero succ) where
  zero := subZero zero succ
  succ := subSucc zero succ
  zero_ne_succ n h := hzero n.1 (Subtype.ext_iff.mp h)
  succ_injective a b h := Subtype.ext (hinj (Subtype.ext_iff.mp h))
  induction s h0 hstep := by

    intro n
    have hsub : nats zero succ ⊆
        {m | ∃ h : m ∈ nats zero succ, (⟨m, h⟩ : Nat' zero succ) ∈ s} := by
      apply nats_induction zero succ
      · exact ⟨zero_mem_nats zero succ, h0⟩
      · rintro m ⟨hmnat, hms⟩
        exact ⟨succ_mem_nats zero succ hmnat, hstep ⟨m, hmnat⟩ hms⟩
    obtain ⟨_, hns⟩ := hsub n.2
    exact hns

theorem exists_peano_submodel (hzero : ∀ n, zero = succ n) (hinj : Function.Injective
    succ) :
    Nonempty (PeanoModel (Nat' zero succ)) :=
  ⟨peanoSub zero succ hzero hinj⟩
```

```
end

section
set_option linter.unusedVariables false

theorem example_422.{u_1} : ∀ {M : Type u_1} (zero : M) (succ : M → M),
  (∀ (n : M), @Ne M zero (succ n)) →
    @Function.Injective M M succ →
      Nonempty
        (DomainTheory.NeighbourhoodSystems.PeanoModel (@DomainTheory.
    NeighbourhoodSystems.Exercise422.Nat' M zero succ)) :=
  @DomainTheory.NeighbourhoodSystems.Exercise422.exists_peano_submodel
end

section
variable {M : Type*} (zero : M) (succ : M → M)

theorem genOp_monotone : Monotone (genOp zero succ) := by
  intro x y hxy z hz
  rcases hz with hz | ⟨a, ha, rfl⟩
  · exact Or.inl hz
  · exact Or.inr ⟨a, hxy ha, rfl⟩

theorem genOp_nats : genOp zero succ (nats zero succ) = nats zero succ :=
  lfpSet_isFixed (genOp zero succ) (genOp_monotone zero succ)

end

end DomainTheory.NeighbourhoodSystems.Exercise422
end
```

3.5.25 Exercise 4.23 — commuting with the iterates

(Suggested by S. Eilenberg). Suppose $f : \mathcal{D} \to \mathcal{D}$ is approximable on a given domain $\mathcal{D}$. Suppose $a_n : \mathcal{D} \to \mathcal{D}$ is a sequence of approximable maps where

(i) $a_0(x) = \bot$, for all $x \in |\mathcal{D}|$;

(ii) $a_n \sqsubseteq a_{n+1}$ in $\mathcal{D} \to \mathcal{D}$, for all $n \in \mathbf{N}$;

(iii) $\bigsqcup_{n=0}^{\infty} a_n = I_{\mathcal{D}}$ in $\mathcal{D} \to \mathcal{D}$;

(iv) $a_{n+1} \circ f = a_{n+1} \circ f \circ a_n$, for all $n \in \mathbf{N}$.

Prove that f has a unique fixed point. (Hint: Show that if $x = f(x)$, then $a_n(x) \sqsubseteq a_n(\mathrm{fix}(f))$ for all $n \in \mathbf{N}$ by induction on n.)

Exercise_4_23.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_2
```

```
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.bot
public import Mathlib.Order.Bounds.Defs
public import Mathlib.Basic.ExistsUnique

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α : Type*} {V : NeighborhoodSystem α}
namespace ApproximableMap

theorem f_unique_fixedPoint (f : ApproximableMap V V) (a : ℕ → ApproximableMap V V)
    (ha0 : ∀ x, (a 0).toElementMap x = V.bot)
    (hlub : ∀ x, IsLUB {y | ∃ n, y = (a n).toElementMap x} x)
    (hcomm : ∀ n x, (a (n + 1)).toElementMap (f.toElementMap x) =
      (a (n + 1)).toElementMap (f.toElementMap ((a n).toElementMap x))) :
    ∃! x, f.toElementMap x = x := by
  set fix := f.fixElement with hfixdef
  have hfixed : f.toElementMap fix = fix := toElementMap_fixElement f
  refine ⟨fix, hfixed, ?_⟩
  intro x hx

  have hle : fix ≤ x := fixElement_le_of_toElementMap_le f (le_of_eq hx)

  have approx_le : ∀ n, (a n).toElementMap x ≤ (a n).toElementMap fix := by
    intro n
    induction n with
    | zero => rw [ha0 x]; exact bot_le
    | succ k ih =>
      have h1 : (a (k + 1)).toElementMap x =
          (a (k + 1)).toElementMap (f.toElementMap ((a k).toElementMap x)) := by
        rw [← hcomm k x, hx]
      have h2 : (a (k + 1)).toElementMap (f.toElementMap ((a k).toElementMap fix)) =
          (a (k + 1)).toElementMap fix := by
        rw [← hcomm k fix, hfixed]
      rw [h1, ← h2]
      exact toElementMap_mono (a (k + 1)) (toElementMap_mono f ih)

  have hfix_ub : ∀ n, (a n).toElementMap fix ≤ fix := fun n => (hlub fix).1 ⟨n, rfl⟩

  have hge : x ≤ fix := by
    apply (hlub x).2
    rintro y ⟨n, rfl⟩
    exact le_trans (approx_le n) (hfix_ub n)
  exact le_antisymm hge hle

end ApproximableMap
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.ApproximableMap
section
```

```
set_option linter.unusedVariables false

theorem example_423.{u_1} : ∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
  (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
  (a : Nat → @DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V),
  (∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
      @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V
          (a (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))) x)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot α V)) →
    (∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
        @IsLUB (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
          (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V)
            (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α V)))
          (@Set.ofPred (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
    α V)
            fun (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V
    ) =>
            ∃ (n : Nat),
              @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
    y
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V
     V (a n) x))
          x) →
      (∀ (n : Nat) (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
    α V),
          @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V
              (a
                (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) n
                  (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))))
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V
     f x))
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V
              (a
                (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) n
                  (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))))
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V
     f
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V
     V (a n) x)))) →
        @ExistsUnique (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
     V)
          fun (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
    =>
          @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α V V f
     x) x :=
  @DomainTheory.NeighbourhoodSystems.ApproximableMap.f_unique_fixedPoint
end
```

```
end DomainTheory.NeighbourhoodSystems.ApproximableMap
end
```

3.5.26 Exercise 4.24 — Schroeder-Bernstein theorem

(For set theorists). Let $f : A \to B$ and $g : B \to A$ be one-one functions (into, not necessarily onto!) Prove the Schroeder - Bernstein theorem to the effect that there exists a one-one correspondence $h : A \leftrightarrow B$. (Hint: (Suggested by A. Tarski). By the fixed-point theorem find $X \subseteq A$ where

$$X = (A - g(B)) \cup g(f(X)),$$

where $f(X) =$ the image of the set X under the function f. Define $h \subseteq A \times B$ as a union of two restrictions:

$$h = f \restriction X \cup g^{-1} \restriction (A - X).$$

A picture helps.)

Exercise_4_24.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    NeighborhoodSystem
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_14
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Definition_2_1
public import Mathlib.Algebra.Group.End

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise424
open DomainTheory.NeighbourhoodSystems.Exercise414 Function

section
variable {A B : Type*} {f : A → B} {g : B → A}

def sbOp (f : A → B) (g : B → A) (X : Set A) : Set A := (Set.range g)? ∪ g '' (f '' X
    )

theorem sbOp_monotone (f : A → B) (g : B → A) : Monotone (sbOp f g) := by
  intro X Y hXY a ha
  rcases ha with ha | ⟨b, ⟨x, hx, rfl⟩, rfl⟩
  · exact Or.inl ha
  · exact Or.inr ⟨f x, ⟨x, hXY hx, rfl⟩, rfl⟩

def sbSet (f : A → B) (g : B → A) : Set A := lfpSet (sbOp f g)

theorem sbSet_isFixed (f : A → B) (g : B → A) : sbOp f g (sbSet f g) = sbSet f g :=
  lfpSet_isFixed (sbOp f g) (sbOp_monotone f g)

theorem g_f_mem_of_mem {a : A} (ha : a ∈ sbSet f g) : g (f a) ∈ sbSet f g := by
  rw [← sbSet_isFixed]
  exact Or.inr ⟨f a, ⟨a, ha, rfl⟩, rfl⟩
```

```
theorem mem_range_of_not_mem {a : A} (ha : a ∈ sbSet f g) : a ∈ Set.range g := by
  have hne : a ∈ sbOp f g (sbSet f g) := by rw [sbSet_isFixed]; exact ha
  have : ¬ a ∈ Set.range g := fun h => hne (Or.inl h)
  exact not_not.mp this

open Classical in
end
end DomainTheory.NeighbourhoodSystems.Exercise424

section
namespace DomainTheory.NeighbourhoodSystems.Exercise424
open DomainTheory.NeighbourhoodSystems.Exercise414 Function
section
variable {A B : Type*} {f : A → B} {g : B → A}

open Classical in

noncomputable def sbFun (f : A → B) (g : B → A) (a : A) : B :=
  if ha : a ∈ sbSet f g then f a else Classical.choose (mem_range_of_not_mem ha)

theorem g_sbFun_not_mem {a : A} (ha : a ∈ sbSet f g) : g (sbFun f g a) = a := by
  rw [sbFun, dite_eq_right ha]
  exact Classical.choose_spec (mem_range_of_not_mem ha)

theorem sbFun_mem {a : A} (ha : a ∈ sbSet f g) : sbFun f g a = f a := dite_eq_left ha

theorem sbFun_injective (hf : Injective f) : Injective (sbFun f g) := by
  intro a₁ a₂ heq
  by_cases h1 : a₁ ∈ sbSet f g <;> by_cases h2 : a₂ ∈ sbSet f g
  · rw [sbFun_mem h1, sbFun_mem h2] at heq
    exact hf heq
  ·
    exfalso
    rw [sbFun_mem h1] at heq
    have : a₂ = g (f a₁) := by rw [heq, g_sbFun_not_mem h2]
    exact h2 (this ▸ g_f_mem_of_mem h1)
  · exfalso
    rw [sbFun_mem h2] at heq
    have : a₁ = g (f a₂) := by rw [← heq, g_sbFun_not_mem h1]
    exact h1 (this ▸ g_f_mem_of_mem h2)
  ·
    have : g (sbFun f g a₁) = g (sbFun f g a₂) := by rw [heq]
    rw [g_sbFun_not_mem h1, g_sbFun_not_mem h2] at this
    exact this

theorem sbFun_surjective (hg : Injective g) : Surjective (sbFun f g) := by
  intro b
  by_cases hb : g b ∈ sbSet f g
  ·
    rw [← sbSet_isFixed] at hb
    rcases hb with hb | ⟨y, ⟨a, ha, rfl⟩, hgy⟩
    · exact absurd ⟨b, rfl⟩ hb
    · refine ⟨a, ?_⟩
      rw [sbFun_mem ha, hg hgy]
  ·
    refine ⟨g b, ?_⟩
```

```
    exact hg (g_sbFun_not_mem hb)

noncomputable def schroeder_bernstein_equiv (hf : Injective f) (hg : Injective g) : A
    ≃ B :=
  Equiv.ofBijective (sbFun f g) ⟨sbFun_injective hf, sbFun_surjective hg⟩

open Classical in

theorem schroeder_bernstein (hf : Injective f) (hg : Injective g) :
    ∃ h : A → B, Bijective h :=
  ⟨sbFun f g, sbFun_injective hf, sbFun_surjective hg⟩

end

section
set_option linter.unusedVariables false

theorem example_424.{u_1, u_2} : ∀ {A : Type u_1} {B : Type u_2} {f : A → B} {g : B →
     A},
  @Function.Injective A B f → @Function.Injective B A g → ∃ (h : A → B), @Function.
    Bijective A B h :=
  @DomainTheory.NeighbourhoodSystems.Exercise424.schroeder_bernstein
end

end DomainTheory.NeighbourhoodSystems.Exercise424
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

end DomainTheory.NeighbourhoodSystems
end
```

3.5.27 Exercise 4.25 — unary sequence domain

Perhaps the domains $\mathbf{N}$ and C are not exactly analogous? C was based on $\{0, 1\}$ as the underlying set of tokens. Construct a system C_1 based on $\{1\}^*$ (= finite strings of 1's) with neighbourhoods:

$$C_1 = \{\, \{1^m \mid m > n\} \mid n \in \mathbf{N} \,\} \cup \{\, \{1^n\} \mid n \in \mathbf{N} \,\}.$$

What structure should be put on C_1 strictly analogous to that on $C (= C_2)$? What kinds of approximable maps relate $\mathbf{N}$, C_1, and C_2? Draw some pictures.

Exercise_4_25.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Example_4_3
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise425
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap

section
```

```
def shift (X : Set ℕ) : Set ℕ := {k | ∃ m ∈ X, k = m + 1}
end

section

def tail (n : ℕ) : Set ℕ := {m | n ≤ m}
end

section
@[simp] theorem mem_tail {n k : ℕ} : k ∈ tail n ↔ n ≤ k := Iff.rfl
end

section

def memC1 (X : Set ℕ) : Prop := (∃ n, X = tail n) ∨ (∃ n, X = {n})
end

section
theorem memC1_singleton (n : ℕ) : memC1 ({n} : Set ℕ) := Or.inr ⟨n, rfl⟩
end

section
theorem memC1_tail (n : ℕ) : memC1 (tail n) := Or.inl ⟨n, rfl⟩
end

section
theorem shift_mono {X X' : Set ℕ} (h : X' ⊆ X) : shift X' ⊆ shift X := by
  rintro k ⟨m, hm, rfl⟩; exact ⟨m, h hm, rfl⟩
end

section

theorem shift_singleton (n : ℕ) : shift ({n} : Set ℕ) = {n + 1} := by
  ext k
  simp only [shift, Set.mem_singleton_iff, Set.mem_ofPred_eq]
  constructor
  · rintro ⟨m, rfl, rfl⟩; rfl
  · rintro rfl; exact ⟨n, rfl, rfl⟩
end

section

theorem shift_tail (n : ℕ) : shift (tail n) = tail (n + 1) := by
  ext k
  simp only [shift, tail, Set.mem_ofPred_eq]
  constructor
  · rintro ⟨m, hm, rfl⟩; omega
  · intro h; exact ⟨k - 1, by omega, by omega⟩
end

section

theorem memC1_shift {X : Set ℕ} (hX : memC1 X) : memC1 (shift X) := by
  rcases hX with ⟨n, rfl⟩ | ⟨n, rfl⟩
  · exact Or.inl ⟨n + 1, shift_tail n⟩
```

```
  · exact Or.inr ⟨n + 1, shift_singleton n⟩
end

section

theorem singleton_tail_nd (n k : ℕ) :
    ({k} : Set ℕ) ⊆ tail n ∨ tail n ⊆ {k} ∨ ({k} : Set ℕ) ∩ tail n = ∅ := by
  by_cases h : n ≤ k
  · exact Or.inl (by intro x hx; rw [Set.mem_singleton_iff] at hx; subst hx; exact h)
  · refine Or.inr (Or.inr ?_)
    ext w
    simp only [Set.mem_inter_iff, Set.mem_singleton_iff, mem_tail, Set.
    mem_empty_iff_false,
      iff_false, not_and]
    rintro rfl hw; exact h hw
end

section

theorem nestedOrDisjoint : NestedOrDisjoint memC1 := by
  rintro X Y (⟨n, rfl⟩ | ⟨n, rfl⟩) (⟨m, rfl⟩ | ⟨m, rfl⟩)
  · rcases le_total n m with h | h
    · exact Or.inr (Or.inl (fun k hk => le_trans h hk))
    · exact Or.inl (fun k hk => le_trans h hk)
  · rcases singleton_tail_nd n m with h | h | h
    · exact Or.inr (Or.inl h)
    · exact Or.inl h
    · exact Or.inr (Or.inr (by rw [Set.inter_comm]; exact h))
  · rcases singleton_tail_nd m n with h | h | h
    · exact Or.inl h
    · exact Or.inr (Or.inl h)
    · exact Or.inr (Or.inr h)
  · by_cases h : n = m
    · subst h; exact Or.inl (Set.Subset.refl _)
    · refine Or.inr (Or.inr ?_)
      ext w
      simp only [Set.mem_inter_iff, Set.mem_singleton_iff, Set.mem_empty_iff_false,
    iff_false,
        not_and]
      rintro rfl h2; exact h h2
end

section
theorem tail_zero : tail 0 = Set.univ := by ext k; simp [tail]
end

section
theorem memC1_univ : memC1 (Set.univ : Set ℕ) := Or.inl ⟨0, tail_zero.symm⟩
end

end DomainTheory.NeighbourhoodSystems.Exercise425

section
namespace DomainTheory.NeighbourhoodSystems.Exercise425
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap
section
```

```
def C1 : NeighborhoodSystem ℕ :=
  NeighborhoodSystem.ofNestedOrDisjoint memC1 Set.univ Set.univ_nonempty
    memC1_univ nestedOrDisjoint
    (fun _ => Set.subset_univ _)
end

section
@[simp] theorem C1_mem {X : Set ℕ} : C1.mem X ↔ memC1 X := Iff.rfl
end

section
@[simp] theorem C1_master : C1.master = (Set.univ : Set ℕ) := rfl
end

section

def consMap : ApproximableMap C1 C1 where
  rel X Y := memC1 X ∧ memC1 Y ∧ shift X ⊆ Y
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨memC1_univ, memC1_univ, Set.subset_univ _⟩
  inter_right := by
    rintro X Y Y' ⟨hX, hY, hsub⟩ ⟨_, hY', hsub'⟩
    have hsubInter : shift X ⊆ Y ∩ Y' := Set.subset_inter hsub hsub'
    exact ⟨hX, C1.inter_mem hY hY' (memC1_shift hX) hsubInter, hsubInter⟩
  mono := by
    rintro X X' Y Y' ⟨hX, hY, hsub⟩ hX'X hYY' hX' hY'
    exact ⟨hX', hY', (shift_mono hX'X).trans (hsub.trans hYY')⟩
end

section

def infElt : C1.Element := consMap.fixElement
end

section

def oneBot (n : ℕ) : C1.Element := C1.principal (memC1_tail n)
end

section

def oneElem (n : ℕ) : C1.Element := C1.principal (memC1_singleton n)
end

section

def relateNToC1 : ApproximableMap Example43.N C1 := Example43.constLiftN C1 oneElem
end

section

theorem consMap_oneBot (n : ℕ) : consMap.toElementMap (oneBot n) = oneBot (n + 1) :=
    by
  apply Element.ext
```

```
  intro Y
  constructor
  · rintro ⟨X', ⟨_, hXX'⟩, _, hY, hsub⟩
    refine ⟨hY, ?_⟩
    have hpre : shift (tail n) ⊆ Y := (shift_mono hXX').trans hsub
    rwa [shift_tail] at hpre
  · rintro ⟨hY, hsub⟩
    refine ⟨tail n, ⟨memC1_tail n, subset_rfl⟩, memC1_tail n, hY, ?_⟩
    rw [shift_tail]; exact hsub
end

section

theorem consMap_oneElem (n : ℕ) : consMap.toElementMap (oneElem n) = oneElem (n + 1)
    := by
  apply Element.ext
  intro Y
  constructor
  · rintro ⟨X', ⟨_, hXX'⟩, _, hY, hsub⟩
    refine ⟨hY, ?_⟩
    have hpre : shift {n} ⊆ Y := (shift_mono hXX').trans hsub
    rwa [shift_singleton] at hpre
  · rintro ⟨hY, hsub⟩
    refine ⟨{n}, ⟨memC1_singleton n, subset_rfl⟩, memC1_singleton n, hY, ?_⟩
    rw [shift_singleton]; exact hsub
end

section

theorem infElt_eq : consMap.toElementMap infElt = infElt :=
  toElementMap_fixElement consMap
end

section

theorem relateNToC1_bot : relateNToC1.toElementMap Example43.N.bot = C1.bot :=
  Example43.constLiftN_bot C1 oneElem
end

section
set_option linter.unusedVariables false

theorem example_425 : @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element Nat DomainTheory.NeighbourhoodSystems.Exercise425.C1)
  (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap Nat Nat
    DomainTheory.NeighbourhoodSystems.Example43.N
    DomainTheory.NeighbourhoodSystems.Exercise425.C1 DomainTheory.NeighbourhoodSystems
    .Exercise425.relateNToC1
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot Nat DomainTheory.
    NeighbourhoodSystems.Example43.N))
  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.bot Nat DomainTheory.
    NeighbourhoodSystems.Exercise425.C1) :=
  DomainTheory.NeighbourhoodSystems.Exercise425.relateNToC1_bot
end

section
```

```
theorem relateNToC1_natElem (n : ℕ) :
    relateNToC1.toElementMap (Example43.natElem n) = oneElem n :=
  Example43.constLiftN_natElem C1 oneElem n
end

end DomainTheory.NeighbourhoodSystems.Exercise425
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
open ApproximableMap

section
variable {α : Type*} {V : NeighborhoodSystem α}

theorem fixMap_fixed (V : NeighborhoodSystem α) (φ : (funSpace V V).Element) :
    (toApproxMap φ).toElementMap ((fixMap V).toElementMap φ) = (fixMap V).toElementMap
     φ := by
  rw [fixMap_toElementMap]
  exact toElementMap_fixElement (toApproxMap φ)

theorem fixMap_unique (V : NeighborhoodSystem α) (fax : ApproximableMap (funSpace V V)
     V)
    (h_fix : ∀ φ, (toApproxMap φ).toElementMap (fax.toElementMap φ) = fax.toElementMap
     φ)
    (h_least : ∀ (φ : (funSpace V V).Element) (z : V.Element),
      (toApproxMap φ).toElementMap z ≤ z → fax.toElementMap φ ≤ z) :
    fax = fixMap V := by
  apply ext_of_toElementMap
  intro φ
  apply le_antisymm
  · exact h_least φ _ (le_of_eq (fixMap_fixed V φ))
  · exact fixMap_least V φ (le_of_eq (h_fix φ))

end

end DomainTheory.NeighbourhoodSystems
end
```

3.6 Typed λ-calculus

Dependency diagram. Each box is one item. The arrowhead is on the item that imports. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it is not shown. Blue is a definition, green a proposition, amber a table, red a theorem, and indigo an exercise.

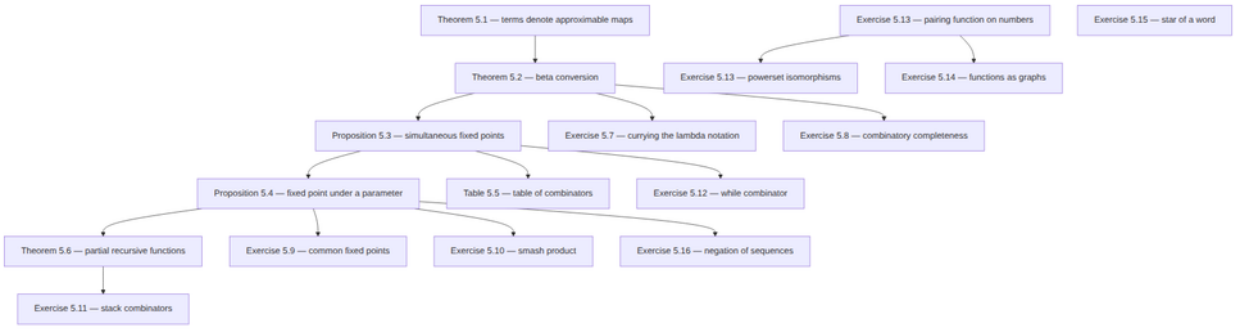

Figure 43: Typed λ-calculus.

3.6.1 Introduction

LECTURE V TYPED λ - CALCULUS

In Examples 4.3 and 4.4, after suitable domains have been constructed, functions are characterized by recursion equations whose form of expression is — basically — a composition or substitution of known functions together with the function to be defined. This method can be made more precise and more easily usable by expanding our notation for functions — particularly by inventing a "temporary" notation for a function as a thing in itself without having to have special letters for functions. The device is called λ-*abstraction*. It is related to ordinary set abstraction (the $\{x \mid \ldots\}$ — notation already much used in these lectures), but we gear the approach to domains and their elements, and especially to function spaces.

At this stage it would not be so helpful to produce a rigorously formal definition of the syntax of the typed λ-calculus; we shall try to suggest what is needed by example. There are so many examples at hand, the less formal discussion ought to be sufficient.

In the first place we should set aside, in the notational store room as it were, a stock of variables

$$x, y, z, w, \ldots$$

These variables will be required in different "sizes" or "types". Roughly speaking there should be an infinite number of variables to range over the elements of each domain $\mathcal{D}$. We could perhaps write

$$x_0^{\mathcal{D}}, x_1^{\mathcal{D}}, x_2^{\mathcal{D}}, \ldots,$$

but the subscripts to insure an infinity of variables and the superscripts to record the typing of the variables lead to a notation as

tiresome to write as it is to read. We simply agree that we can have as many variables as we need and that they come in all the types.

Strictly speaking we should also introduce *type symbols* and not confuse types with domains. But if the reader will simply keep in mind that *form* in language has always to be kept distinct from *content*, the confusion at the type level will not matter so very much. A point at which the confusion might cause a real confusion concerns *compound types*. Given $\mathcal{D}_0$ and $\mathcal{D}_1$ we can form such compounds as

$$\mathcal{D}_0 + \mathcal{D}_1, \quad \mathcal{D}_0 \times \mathcal{D}_1, \quad \mathcal{D}_0 \to \mathcal{D}_1$$

What has to be remembered is that a compound domain (neighbourhood system), $\mathcal{D}_0 \times \mathcal{D}_1$ say, does not uniquely determine the "parts" $\mathcal{D}_0$ and $\mathcal{D}_1$. (We could make it do so, but it would cost some effort.)

Of course, the symbol "$\mathcal{D}_0 \times \mathcal{D}_1$" has well defined parts. The point is that *different* ways of forming a compound domain could lead to the *same* result, meaning that a domain does not let us retrace its exact history of construction. Compound symbols, however, always carry their histories around with them, since otherwise they would not be readable. What we want, of course, are *both* domain symbols *and* domains, the latter being the *meanings* of the former. Most of the time we can happily pretend that it is only the domains themselves we have to think about.

Besides variables, we will also need certain *constants*. For instance, the symbol 0 (perhaps, better $0^{\mathbf{N}}$) denotes a certain element of $|\mathbf{N}|$. Similarly, in view of Theorem 4.2, for each domain $\mathcal{D}$ there is a well-determined element $\mathrm{fix}^{\mathcal{D}}$ of the compound type $((\mathcal{D} \to \mathcal{D}) \to \mathcal{D})$ denoting the least fixed-point operator. We have considered any number of similar constants of a great variety of types already (cf. 4.3 and 4.4; cond is an especially good one). We can say that the variables and constants are *atomic terms*, where "atomic" here means non-compound.

To form compound terms, there are several means: for example, if $\tau, \ldots, \sigma$ is a list of already obtained terms (including variables or constants), then we can form an ordered *tuple*

We have already done so in 3.1. If the types of $\tau, \ldots, \sigma$ are $D, \ldots, D'$, respectively, then the type of the tuple is the product domain

$$D \times \cdots \times D',$$

because we intend that the tuple denote an element of this domain. (The tuple notation for *functions* as in 3.3 is being forgotten for the time being.)

Next suppose that τ has type $(D_0 \to D_1)$ and σ has type D_0, then the usual *function-value* notation

$$\tau(\sigma)$$

is a compound term of type D_1. We also use

$$\tau(\sigma_0, \ldots, \sigma_{n-1})$$

as an abbreviation of

$$\tau(\langle \sigma_0, \ldots, \sigma_{n-1} \rangle),$$

where, if the types of $\sigma_0, \ldots, \sigma_{n-1}$ are $D_0, \ldots, D_{n-1}$, then the type of τ has to be of the form

$$((D_0 \times \cdots \times D_{n-1}) \to D_n)$$

where D_n is the type of the compound. In this manner, with functions applied to tuples, we have the full facility of substitution into functions of many variables just by iterating the notation.

Having taken into account *function value*, it remains to provide for *function definition*. Suppose that $x_0, \ldots, x_{n-1}$ is a list of distinct variables of types $D_0, \ldots, D_{n-1}$. Suppose further that τ is a term — no matter how complicated — of type D_n. Then we can regard τ as defining a function of n-variables of type

$$((D_0 \times \cdots \times D_{n-1}) \to D_n).$$

What we have not done is to reward our regard by, as yet, providing a quick-to-write "name" for that function. This we now do; it is called

$$\lambda x_0, \ldots, x_{n-1} \cdot \tau,$$

where we stress that the x_i must be *distinct* variables and that this
expression denotes the *whole function*. That is why we provide it with a special symbol.
Here is an example of the λ - notation

$$\lambda x, y.x,$$

which is read "lambda ex wye ... (pause) ... ex". If the types of x and y are D_0 and D_1, then the type of the above is

$$((D_0 \times D_1) \to D_0).$$

Indeed, we know this function very well: it is the *first projection function* p_0 of 3.3 and the equation

$$p_0 = \lambda x, y.x$$

is true, as is the equation

$$p_1 = \lambda x, y.y.$$

In the notation of 3.3, we also find the true equation

$$\langle f, g\rangle = \lambda w.\langle f(w), g(w)\rangle,$$

where on the right-hand side we are using "official" λ - notation for a function of type

$$(D_2 \to (D_0 \times D_1)).$$

The notation on the left is just an *abbreviation* and it should not be confused with the pair (2-tuple) of type

$$((D_2 \to D_0) \times (D_2 \to D_1)).$$

(Since the two domains just mentioned are *isomorphic*, the possible confusion is not all that serious. On the other hand, one confusion we will completely overlook is that between 1-tuples $\langle x\rangle$ and elements x. Strictly speaking they are different, but we shall not bother to make the distinction.)
Here are some other examples of true equations:

$$\text{eval} = \lambda f, x.f(x) \qquad \text{(cf. 3.11)}$$

$$\text{curry} = \lambda g \lambda x \lambda y.g(x, y) \qquad \text{(cf. 3.12)}$$

The first should be immediately clear; while the second is particularly *instructive*. What is being illustrated is that the λ - notation can
be *iterated*. The distinction being drawn is between

$$\lambda x_0, x_1, \ldots, x_{n-1}.\tau \quad \text{and} \quad \lambda x_0 \lambda x_1 \ldots \lambda x_{n-1}.\tau.$$

The first has type

$$((D_0 \times D_1 \times \cdots \times D_{n-1}) \to D_n);$$

while the second has type

$$(D_0 \to (D_1 \to (\ldots (D_{n-1} \to D_n) \ldots))).$$

This is related also to the true equation

$$\mathrm{curry}(\lambda x, y.\tau) = \lambda x \lambda y.\tau,$$

which shows that there are operators relating to the two notations. The first is the *multivariate* form; the second is the *curried* form.

Here is another true equation

$$\mathrm{fix} = \mathrm{fix}(\lambda F \lambda f.f(F(f))),$$

where the fix on the left has type $((D \to D) \to D)$ and that on the right type

$$((((D \to D) \to D) \to ((D \to D) \to D)) \to ((D \to D) \to D)).$$

This is the content of Exercise 4.9. (This also shows why type superscripts are tiresome.)

The combination

$$\mathrm{fix}(\lambda x.\tau)$$

occurs so often, that from time to time we abbreviate it as

$$!x.\tau,$$

but remember it only makes sense if x and τ have the *same* type. For example in 4.3 we could have written

$$\sigma = !f \lambda n.\mathrm{cond}(\mathrm{zero}(n), 0, f(\mathrm{pred}(n)) + \mathrm{pred}(n))$$

and read this as

"σ is the least (recursively defined) function f whose value at n is cond $(\ldots)$."

We note that in the so-called "body" of the expression inside the

cond-part the variable f occurs again. That is just the point! This is a *recursive definition*; it is made into an *explicit* definition by invoking the least fixed-point operator.

In a λ-expression, $\lambda x, y, z.\tau$, say, the variables x, y, z are being *bound* in τ; but τ may have other variables that are nowhere bound in τ and these remain *free variables* of the whole expression. Bound variables are *dummy variables* and may be rewritten by other variables; thus

$$\lambda x.\tau = \lambda y.\tau[y/x]$$

is a true equation *PROVIDED* the variable y does not occur in τ. In the equation the notation $\tau[y/x]$ means the result of *substituting* (*rewriting*) the variable y for the variable x throughout the term τ. We can also write $\tau[\sigma/x]$ for substituting a whole term σ for a variable in the other term.

We have already spoken of "true equations", but how do we know that these curious equations are meaningful at all? They are, but this is something that has to be proved.

3.6.2 Theorem 5.1 — terms denote approximable maps

THEOREM 5.1. Every typed λ-term τ defines an approximable function of its free variables.

Proof: We argue by an induction on the complexity of τ; there will only be a few cases to consider since the "syntax" of λ-terms is limited — even though terms can be of any length.

If τ is a variable or a constant there is nothing to prove. We already know that

$$x \mapsto x \qquad \text{and} \qquad x \mapsto k$$

are approximable functions.

Suppose τ has the form

$$\langle \sigma_0, \ldots, \sigma_{n-1} \rangle.$$

Then the σ_i are less complex terms, and so we can assume — as our induction hypothesis — that they define approximable functions of the free variables. Having said this, we just apply the already

proved 3.4 to conclude (after a suitable generalization to the multivariate case) that τ, which takes on tuples as values, also defines an approximable function.

Next, suppose τ has the form

$$\sigma_0(\sigma_1),$$

where we are sure that the types of all the terms match properly. Again we can assume the σ_i to be well behaved. But the values we seek can also be written as

$$\mathrm{eval}(\sigma_0, \sigma_1).$$

Since eval is approximable by 3.11, we just have to invoke an instance of 3.7 to gain the desired conclusion.

Finally, suppose that τ has the form

$$\lambda x.\sigma.$$

By a judicious choice of the order of the variables in σ (including x), we can assume that σ defines an approximable function

$$g : D_0 \times \cdots \times D_{n-1} \times D_n \to D'$$

where D' is the type of σ, D_n is the type of x, and $D_0, \ldots, D_{n-1}$ are the types of the remaining free variables of σ. We apply 3.12 and obtain an approximable function

$$\mathrm{curry}(g) : D_0 \times \cdots \times D_{n-1} \to (D_n \to D').$$

But, this is just exactly the function defined by τ.

We leave as an exercise the more general case of a term τ of the form

$$\lambda x_0, \ldots, x_{k-1}.\sigma,$$

which has a string of bound variables. □

We can now say more precisely what it means to call $\sigma = \tau$ a "true equation". This means that, if we employ the method of the proof of 5.1, the two terms define the *same function* of the free variables. For example,

$$\lambda x.\tau = \lambda y.\tau[y/x]$$

is true, provided y does not occur free in the term τ, since the systematic generation of the function defined by $\lambda x.\tau$ does not depend on what the variable x *looks like* but only on its *position* in the term τ. Some other obviously desirable rules for generating true equations are stated in the exercises. But one rule is so basic that we state it here in full generality.

Theorem_5_1.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Definition_3_3
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Lemma_3_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

section
variable {α β ? : Type*}
  {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ : NeighborhoodSystem ?}

theorem theorem_51 :
    (∀ (g : ApproximableMap (prod V₀ V₁) V₂) (v : V₀.Element) (x : V₁.Element),
      (toApproxMap ((curry g).toElementMap v)).toElementMap x = g.toElementMap (pair v
     x)) ∧
    (∀ (F : ApproximableMap V₂ (funSpace V₀ V₁)) (G : ApproximableMap V₂ V₀) (w : V₂.
    Element),
      ((evalMap V₀ V₁).comp (paired F G)).toElementMap w =
        (toApproxMap (F.toElementMap w)).toElementMap (G.toElementMap w)) ∧
    (∀ (k : V₁.Element) (x : V₀.Element), (constMap V₀ k).toElementMap x = k) ∧
    (∀ (f : ApproximableMap V₂ V₀) (g : ApproximableMap V₂ V₁) (w : V₂.Element),
      (paired f g).toElementMap w = pair (f.toElementMap w) (g.toElementMap w)) ∧
    (∀ (x : V₀.Element) (y : V₁.Element), (proj₀ V₀ V₁).toElementMap (pair x y) = x) :=
  ⟨fun g v x => toElementMap_curry_apply g v x,
   fun F G w => toElementMap_evalMap_comp_paired F G w,
   fun k x => toElementMap_constMap k x,
   fun f g w => toElementMap_paired f g w,
   fun x y => toElementMap_proj₀_pair x y⟩

end
end DomainTheory.NeighbourhoodSystems
```

3.6.3 Theorem 5.2 — beta conversion

THEOREM 5.2. For suitably typed λ-terms the following equation is true:

$$(\lambda x_0, \ldots, x_{n-1} \cdot \tau)(\sigma_0, \ldots, \sigma_{n-1}) = \tau[\sigma_0/x_0, \ldots, \sigma_{n-1}/x_{n-1}].$$

Proof: It will be sufficient to carry out the proof for $n = 1$. The proof proceeds by induction on the complexity of the term τ.

In case τ is a *constant* k, the result reads

$$(\lambda x.k)(\sigma) = k,$$

and this is a true equation.

In case τ is a *variable* (in particular, the variable x), the result reads

$$(\lambda x.x)(\sigma) = \sigma,$$

and again this is a true equation.

In case τ is a *tuple* (say, $\langle \tau_0, \tau_1 \rangle$) the result reads

$$(\lambda x.\langle \tau_0, \tau_1 \rangle)(\sigma) = \langle \tau_0[\sigma/x], \tau_1[\sigma/x] \rangle.$$

This is true, because the left-hand side can be transformed by the true equation

$$(\lambda x.\langle \tau_0, \tau_1 \rangle)(\sigma) = \langle (\lambda x.\tau_0)(\sigma), (\lambda x.\tau_1)(\sigma) \rangle;$$

and then we apply the inductive assumption for τ_0 and for τ_1.

In case τ is an *application*, we want (supposing the term is $\tau_0(\tau_1)$),

$$(\lambda x.\tau_0(\tau_1))(\sigma) = \tau_0[\sigma/x](\tau_1[\sigma/x]).$$

We can proceed as in the last case, noting that the left-hand side equals

$$\text{eval } ((\lambda x.\langle \tau_0, \tau_1 \rangle)\ (\sigma))\ .$$

In case τ is an *abstract* (say, $\lambda y.\tau_0$), we want

$$(\lambda x.\lambda y.\tau_0)\ (\sigma) = \lambda y.\tau_0[\sigma/x]$$

PROVIDED the variable y is not free in σ. For this we require the true equation

$$(\lambda x.\lambda y.\tau)\ (\sigma) = \lambda y.(\lambda x.\tau)\ (\sigma)\ .$$

We argue for this by letting g be the function of $n + 2$ free variables defined by τ. Then, by 5.1, the λ-term $\lambda x.\lambda y.\tau$ defines the function $\text{curry } (\text{curry } (g))$ of n arguments. We can call this function h for the moment. We can write

$$h(v)\ (\sigma)\ (y) = g(v, \sigma, y)\ ,$$

where v is a list of arguments. But, with an appropriate combinator inv, which applied to g inverts the order of the last two arguments, we can write

$$h(v)\ (\sigma)\ (y) = \text{curry } (\text{inv } (g))\ (v, y)\ (\sigma)\ .$$

But, $\text{curry}\ (\text{inv}\ (g))$ is just the function defined by $(\lambda x.\tau)$. So what we have proved as true is

$$(\lambda x.\lambda y.\tau)\ (\sigma)\ (y) = (\lambda x.\tau)\ (\sigma)\ .$$

But if y is not free in α and

$$\alpha(y) = \beta$$

is true, then so is

$$\alpha = \lambda y.\beta\ .$$

This completes the proof. □

We note that if τ' is the term $\lambda x, y.\tau$, then $\tau'(x, y)$ means the same as τ. This gives a convenient way of indicating free variables: we just write $\sigma(x, y)$ — where x, y are not free in σ — and this will have the same values as any term τ which does involve the extra free variables x and y. We use this notational device in the next theorem.

Theorem_5_2.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Lemma_3_6

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α β ? ? : Type*}
  {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ : NeighborhoodSystem ?}
namespace Theorem52

theorem beta (g : ApproximableMap (prod V₀ V₁) V₂) (σ : V₁.Element) :
    (evalMap V₁ V₂).comp (paired (curry g) (constMap V₀ σ))
      = g.comp (paired (idMap V₀) (constMap V₀ σ)) := by
  apply ext_of_toElementMap
  intro v
  rw [toElementMap_comp, toElementMap_paired, evalMap_apply, toElementMap_curry_apply,
    toElementMap_constMap, toElementMap_comp, toElementMap_paired, toElementMap_idMap,
    toElementMap_constMap]

theorem beta_abs (g : ApproximableMap (prod (prod V₀ V₁) V₂) V₃) (v : V₀.Element) (σ : V
    ₁.Element)
    (y : V₂.Element) :
    (toApproxMap ((toApproxMap ((curry (curry g)).toElementMap v)).toElementMap σ)).
    toElementMap y
      = g.toElementMap (pair (pair v σ) y) := by
  rw [toElementMap_curry_apply, toElementMap_curry_apply]
```

```
theorem beta_tuple (g₀ : ApproximableMap (prod V₀ V₁) V₂) (g₁ : ApproximableMap (prod V₀
     V₁) V₃)
    (v : V₀.Element) (x : V₁.Element) :
    (toApproxMap ((curry (paired g₀ g₁)).toElementMap v)).toElementMap x
      = pair ((toApproxMap ((curry g₀).toElementMap v)).toElementMap x)
          ((toApproxMap ((curry g₁).toElementMap v)).toElementMap x) := by
  rw [toElementMap_curry_apply, toElementMap_paired, toElementMap_curry_apply,
    toElementMap_curry_apply]

theorem subst_value (g : ApproximableMap (prod V₀ V₁) V₂) (v : V₀.Element) (x : V₁.
    Element) :
    (toApproxMap ((curry g).toElementMap v)).toElementMap x = g.toElementMap (pair v x
    ) :=
  toElementMap_curry_apply g v x

end Theorem52
end

end DomainTheory.NeighbourhoodSystems
end
```

3.6.4 Proposition 5.3 — simultaneous fixed points

Proposition_5_3.lean

```
module

public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Table_5_5

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
namespace ApproximableMap

theorem fixElement_paired_eq (τ : ApproximableMap (prod V₀ V₁) V₀)
    (σ : ApproximableMap (prod V₀ V₁) V₁) :
    (paired τ σ).fixElement =
      pair ((secFixX τ).toElementMap (outerOp τ σ).fixElement) (outerOp τ σ).fixElement
    := by
  set ystar := (outerOp τ σ).fixElement with hystar
  set xstar := (secFixX τ).toElementMap ystar with hxstar

  have hσ : σ.toElementMap (pair xstar ystar) = ystar := by
    have := toElementMap_fixElement (outerOp τ σ)
    rw [← hystar] at this
    rw [outerOp_apply] at this
    rw [hxstar]; exact this

  have hτ : τ.toElementMap (pair xstar ystar) = xstar := by
    rw [hxstar]; exact secFixX_isFixed τ ystar
```

```
  apply le_antisymm
  ·
    apply fixElement_le_of_toElementMap_le
    rw [toElementMap_paired]
    rw [hτ, hσ]
  ·
    set fp := (paired τ σ).fixElement with hfp
    set a := fp.fst with ha
    set b := fp.snd with hb

    have hfpeq : pair (τ.toElementMap fp) (σ.toElementMap fp) = fp := by
      have := toElementMap_fixElement (paired τ σ)
      rw [← hfp, toElementMap_paired] at this
      exact this
    have hfp_pair : fp = pair a b := (pair_fst_snd fp).symm
    have hτa : τ.toElementMap (pair a b) = a := by
      have : (pair (τ.toElementMap fp) (σ.toElementMap fp)).fst = fp.fst := by rw [
    hfpeq]
      rw [fst_pair] at this
      rw [← hfp_pair]; rw [ha]; exact this
    have hσb : σ.toElementMap (pair a b) = b := by
      have : (pair (τ.toElementMap fp) (σ.toElementMap fp)).snd = fp.snd := by rw [
    hfpeq]
      rw [snd_pair] at this
      rw [← hfp_pair]; rw [hb]; exact this

    have hxfix_le : (secFixX τ).toElementMap b ≤ a := by
      rw [secFixX_apply]
      apply fixElement_le_of_toElementMap_le
      rw [sectionX_apply]
      exact le_of_eq hτa

    have houter_le : (outerOp τ σ).toElementMap b ≤ b := by
      rw [outerOp_apply]
      calc σ.toElementMap (pair ((secFixX τ).toElementMap b) b)
          ≤ σ.toElementMap (pair a b) :=
            σ.toElementMap_mono (pair_le_pair_iff.mpr ⟨hxfix_le, le_refl b⟩)
        _ = b := hσb

    have hystar_le : ystar ≤ b := by
      rw [hystar]
      exact fixElement_le_of_toElementMap_le (outerOp τ σ) houter_le
    have hxstar_le : xstar ≤ a := by
      rw [hxstar]
      calc (secFixX τ).toElementMap ystar
          ≤ (secFixX τ).toElementMap b := (secFixX τ).toElementMap_mono hystar_le
        _ ≤ a := hxfix_le
    rw [hfp_pair]
    exact pair_le_pair_iff.mpr ⟨hxstar_le, hystar_le⟩

end ApproximableMap
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
```

```
section
variable {α β ? ? : Type*}
  {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ : NeighborhoodSystem ?}

namespace Theorem51

end Theorem51
end
end DomainTheory.NeighbourhoodSystems
end
```

PROPOSITION 5.3. The least fixed point of $\lambda x, y.\ \langle \tau(x,y), \sigma(x,y)\rangle$ is the pair with coordinates
$!x.\ \tau(x,\ !y.\ \sigma(x,y))$ and
$!y.\ \sigma(!x.\ \tau(x,y), y)$.

Proof: (We are assuming that x and y are not free in τ and σ.) The purpose of the fixed-point search is to find the least solution of the pair of equations $x = \tau(x,y)$ and $y = \sigma(x,y)$. In other words, we are generalizing the fixed-point equation from one to two variables—and, of course, we could go much further to any number of variables. To this end, let
$y_* = !y.\ \sigma(!x.\ \tau(x,y), y)$, and
$x_* = !x.\ \tau(x, y_*)$.
Then
$x_* = \tau(x_*, y_*)$,
and
$y_* = \sigma(!x.\ \tau(x, y_*), y_*)$
$= \sigma(x_*, y_*)$.
This proves that $\langle x_*, y_*\rangle$ is one fixed-point pair.

Suppose, then, that $\langle x_0, y_0\rangle$ is the least solution. (Why does a least solution have to exist? Hint: Consider a suitable mapping of type $D_0 \times D_1 \to D_0 \times D_1$, where D_0 is the type of x and D_1 the type of y.) Then we know $x_0 = \tau(x_0, y_0)$ and $y_0 = \sigma(x_0, y_0)$, and also $x_0 \sqsubseteq x_*$ and $y_0 \sqsubseteq y_*$. But from
$\tau(x_0, y_0) \sqsubseteq x_0$,
it follows that
$!x.\ \tau(x, y_0) \sqsubseteq x_0$.
Consequently,

$$\sigma(!x.\tau(x, y_0), y_0) \sqsubseteq \sigma(x_0, y_0) \sqsubseteq y_0.$$

By the fixed-point definition of y_*, we have $y_* \sqsubseteq y_0$, so $y_* = y_0$; whence,

$$x_* = !x.\tau(x, y_*) = !x.\tau(x, y_0) \sqsubseteq x_0.$$

So also $x_* = x_0$. □ We have the right formula for y_0, and a similar argument gives x_0.

The purpose of giving the above proof was to illustrate the use of the least fixed-point operator in proofs. We have such true principles as:

$$!x.\tau(x) = \tau(!x.\tau(x));$$

and

$$\tau(y) \sqsubseteq y \text{ implies } !x.\tau(x) \sqsubseteq y,$$

provided, of course, that x is not free in τ. These, together with the monotonicity of all the functions, were just the methods used in the above proof. Here is another example.

3.6.5 Proposition 5.4 — fixed point under a parameter

Proposition_5_4.lean

```
module

public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Exercise_5_16

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α : Type*} {V : NeighborhoodSystem α}
namespace ApproximableMap

theorem pfix_eq_fixElement_recOp (τ : ApproximableMap (prod V V) V) :
    pfix τ = toApproxMap (recOp τ).fixElement := by
  set g₀ := (recOp τ).fixElement with hg₀
  set G := toApproxMap g₀ with hG

  have hG_fixed : ∀ x, G.toElementMap x = τ.toElementMap (pair x (G.toElementMap x)) :=
     by
    intro x
    have hfix : (recOp τ).toElementMap g₀ = g₀ := toElementMap_fixElement (recOp τ)
    have := recOp_apply τ g₀ x
    rw [hfix] at this
    rw [hG]; exact this
  apply le_antisymm
  ·
    rw [le_iff_toElementMap_le]
    intro x
    rw [pfix_apply]
    apply fixElement_le_of_toElementMap_le
    rw [section₂_apply]
    exact le_of_eq (hG_fixed x).symm
  ·
    have hpre : (recOp τ).toElementMap (toFilter (pfix τ)) ≤ toFilter (pfix τ) := by
      apply le_of_eq
      have hmap : toApproxMap ((recOp τ).toElementMap (toFilter (pfix τ))) = pfix τ :=
    by
        apply ext_of_toElementMap
        intro x
        rw [recOp_apply]
        have hround : toApproxMap (toFilter (pfix τ)) = pfix τ := by
          have he := (funSpaceEquiv V V).apply_symm_apply (pfix τ)
```

```
        rwa [funSpaceEquiv_apply, funSpaceEquiv_symm_apply] at he
      rw [hround, pfix_isFixed]

    have h1 : toFilter (toApproxMap ((recOp τ).toElementMap (toFilter (pfix τ)))) =
        toFilter (pfix τ) := by rw [hmap]
    have hround2 : toFilter (toApproxMap ((recOp τ).toElementMap (toFilter (pfix τ)))
  ) =
        (recOp τ).toElementMap (toFilter (pfix τ)) := by
      have he := (funSpaceEquiv V V).symm_apply_apply ((recOp τ).toElementMap (
  toFilter (pfix τ)))
      rwa [funSpaceEquiv_apply, funSpaceEquiv_symm_apply] at he
    rw [hround2] at h1
    exact h1
  have hle : g₀ ≤ toFilter (pfix τ) := fixElement_le_of_toElementMap_le (recOp τ)
  hpre
  have := (funSpaceEquiv V V).monotone hle
  rw [funSpaceEquiv_apply, funSpaceEquiv_apply] at this
  have hround : toApproxMap (toFilter (pfix τ)) = pfix τ := by
    have he := (funSpaceEquiv V V).apply_symm_apply (pfix τ)
    rwa [funSpaceEquiv_apply, funSpaceEquiv_symm_apply] at he
  rw [hG, ← hround]
  exact this

end ApproximableMap
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

section
variable {α β ? : Type*}
  {V : NeighborhoodSystem α} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  {V₂ : NeighborhoodSystem ?}

end
end DomainTheory.NeighbourhoodSystems
end
```

PROPOSITION 5.4. Let x, y, and $\tau(x, y)$ be of the same type D and let g be of type $(D \to D)$, then the equation

$$\lambda x.!y.\tau(x, y) =!g.\lambda x.\tau(x, g(x))$$

is true.

Proof : Let f be the function on the left-hand side. We can write

$$f(x) =!y.\tau(x, y) = \tau(x, f(x)).$$

Therefore

$$f = \lambda x.\tau(x, f(x)),$$

and it follows that

$$g_0 = !g.\lambda x.\tau(x, g(x)) \sqsubseteq f.$$

Then we have at once, by definition of g_0,

$$g_0(x) = \tau(x, g_0(x)),$$

for any given x. But by definition of f we find

$$f(x) = !y.\tau(x, y) \sqsubseteq g_0(x).$$

As this holds for all x, then $f \sqsubseteq g_0$ follows. So the equation is true. □

The last proof is instructive as it uses equations and inclusions between functions. In particular we have just made use of the principle:

> if $\tau \sqsubseteq \sigma$ holds for all values of x,
> then $\lambda x.\tau \sqsubseteq \lambda x.\sigma$ holds.

This is another form of Theorem 3.13(i).

3.6.6 Table 5.5 — table of combinators

TABLE 5.5. In the displayed table we give a summary of uses of the λ-notation to define various combinators. We have mentioned some of these equations before, and there are some combinators here we have not mentioned before — their meanings, however, should be clear.

$$\begin{aligned}
P_0 &= \lambda x, y.x \\
P_1 &= \lambda x, y.y \\
\text{pair} &= \lambda x \lambda y.\langle x, y\rangle \\
\text{n-tuple} &= \lambda x_0 \lambda x_1 \ldots \lambda x_{n-1}.\langle x_0, x_1, \ldots, x_{n-1}\rangle \\
\text{diag} &= \lambda x.\langle x, x\rangle \\
\text{funpair} &= \lambda f \lambda g \lambda x.\langle f(x), g(x)\rangle \\
\text{proj}_i^n &= \lambda x_0, x_1, \ldots, x_{n-1}.x_i \\
\text{inv}_{i,j}^n &= \lambda x_0, \ldots, x_i, \ldots, x_j, \ldots, x_{n-1}.\langle x_0, \ldots, x_j, \ldots, x_i, \ldots, x_{n-1}\rangle
\end{aligned}$$

$$\begin{aligned}
\text{eval} &= \lambda f, x.f(x) \\
\text{curry} &= \lambda g \lambda x \lambda y.g(x, y) \\
\text{comp} &= \lambda g, f \lambda x.g(f(x)) \\
\text{const} &= \lambda k \lambda x.k \\
\text{fix} &= \lambda f !x.f(x)
\end{aligned}$$

A TABLE OF COMBINATORS

It is important to note that since we have not typed the variables, these equations are ambiguous: they only become precise when the types are specified. It follows, therefore, that what we find in the table are *schemes* for combinators; there are actually infinitely many distinct combinators corresponding to any one equation depending on how the variables have types chosen for them. Clearly it is better to imagine this variety of combinators than it is to try to notate them with type superscripts.

One interest of combinators is that it is often possible to write expressions without variables — if enough combinators are used. This is sometimes useful, but it can become clumsy. On the other hand, if the same combination occurs over and over, it is sometimes useful to give it a name. This is what we do with, say, *composition* where

$$\mathrm{comp}\,(g, f) = g \circ f.$$

On the one side we have the prefix notation, and on the other, the more common infix notation. With either notation the variable seen in $\lambda x.\, g(f(x))$ has been got rid of. The choice between equivalent notations ought to be based on a desire for readability. □

The reader will have noted that there are some combinators not appearing in Table 5.5. The reason is that combinators like cond, succ, pred, zero, 0 cannot be defined in the pure λ-notation but are specific to domains like T and $\mathbf{N}$; we, thus, have to regard them as primitive. But once they are in hand, a very large number of other functions can be defined from these combined with λ-expressions. The next theorem gives an indication of the possibilities.

Table_5_5.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_25
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Theorem_2_7
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Lemma_3_6

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α β ? : Type*}
  {V : NeighborhoodSystem α} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  {V₂ : NeighborhoodSystem ?}

def P₀ (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) : ApproximableMap (prod
    V₀ V₁) V₀ :=
  proj₀ V₀ V₁

@[simp] theorem P₀_apply (x : V₀.Element) (y : V₁.Element) :
    (P₀ V₀ V₁).toElementMap (pair x y) = x := by
  rw [P₀, toElementMap_proj₀, fst_pair]

def P₁ (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) : ApproximableMap (prod
    V₀ V₁) V₁ :=
  proj₁ V₀ V₁

@[simp] theorem P₁_apply (x : V₀.Element) (y : V₁.Element) :
    (P₁ V₀ V₁).toElementMap (pair x y) = y := by
  rw [P₁, toElementMap_proj₁, snd_pair]
```

```
def diagC (V : NeighborhoodSystem α) : ApproximableMap V (prod V V) := paired (idMap V
    ) (idMap V)

@[simp] theorem diagC_apply (x : V.Element) : (diagC V).toElementMap x = pair x x :=
    by
  rw [diagC, toElementMap_paired, toElementMap_idMap]

def pairC (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    ApproximableMap V₀ (funSpace V₁ (prod V₀ V₁)) := curry (idMap (prod V₀ V₁))

def swapC (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    ApproximableMap (prod V₀ V₁) (prod V₁ V₀) := paired (proj₁ V₀ V₁) (proj₀ V₀ V₁)

@[simp] theorem swapC_apply (x : V₀.Element) (y : V₁.Element) :
    (swapC V₀ V₁).toElementMap (pair x y) = pair y x := by
  rw [swapC, toElementMap_paired, toElementMap_proj₁, toElementMap_proj₀, snd_pair,
    fst_pair]

def compMapTbl (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) (V₂ :
    NeighborhoodSystem ?) :
    ApproximableMap (prod (prod (funSpace V₁ V₂) (funSpace V₀ V₁)) V₀) V₂ :=
  (evalMap V₁ V₂).comp
    (paired
      ((proj₀ (funSpace V₁ V₂) (funSpace V₀ V₁)).comp
        (proj₀ (prod (funSpace V₁ V₂) (funSpace V₀ V₁)) V₀))
      ((evalMap V₀ V₁).comp
        (paired
          ((proj₁ (funSpace V₁ V₂) (funSpace V₀ V₁)).comp
            (proj₀ (prod (funSpace V₁ V₂) (funSpace V₀ V₁)) V₀))
          (proj₁ (prod (funSpace V₁ V₂) (funSpace V₀ V₁)) V₀))))

def compC (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) (V₂ :
    NeighborhoodSystem ?) :
    ApproximableMap (prod (funSpace V₁ V₂) (funSpace V₀ V₁)) (funSpace V₀ V₂) :=
  curry (compMapTbl V₀ V₁ V₂)

def constC (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    ApproximableMap V₁ (funSpace V₀ V₁) := curry (proj₀ V₁ V₀)

def curryIso (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) (V₂ :
    NeighborhoodSystem ?) :
    (funSpace (prod V₀ V₁) V₂).Element ≃o (funSpace V₀ (funSpace V₁ V₂)).Element :=
  (funSpaceEquiv (prod V₀ V₁) V₂).trans
    ((curryEquiv V₀ V₁ V₂).trans (funSpaceEquiv V₀ (funSpace V₁ V₂)).symm)

def curryC (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) (V₂ :
    NeighborhoodSystem ?) :
    ApproximableMap (funSpace (prod V₀ V₁) V₂) (funSpace V₀ (funSpace V₁ V₂)) :=
  ofIso (curryIso V₀ V₁ V₂)

def evalC (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    ApproximableMap (prod (funSpace V₀ V₁) V₀) V₁ := evalMap V₀ V₁

def fixC (V : NeighborhoodSystem α) : ApproximableMap (funSpace V V) V := fixMap V
```

```
def funpairMapTbl (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    (V₂ : NeighborhoodSystem ?) :
    ApproximableMap (prod (prod (funSpace V₂ V₀) (funSpace V₂ V₁)) V₂) (prod V₀ V₁) :=
  paired
    ((evalMap V₂ V₀).comp
      (paired
        ((proj₀ (funSpace V₂ V₀) (funSpace V₂ V₁)).comp
          (proj₀ (prod (funSpace V₂ V₀) (funSpace V₂ V₁)) V₂))
        (proj₁ (prod (funSpace V₂ V₀) (funSpace V₂ V₁)) V₂)))
    ((evalMap V₂ V₁).comp
      (paired
        ((proj₁ (funSpace V₂ V₀) (funSpace V₂ V₁)).comp
          (proj₀ (prod (funSpace V₂ V₀) (funSpace V₂ V₁)) V₂))
        (proj₁ (prod (funSpace V₂ V₀) (funSpace V₂ V₁)) V₂)))

def funpairC (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) (V₂ :
    NeighborhoodSystem ?) :
    ApproximableMap (funSpace V₂ V₀)
      (funSpace (funSpace V₂ V₁) (funSpace V₂ (prod V₀ V₁))) :=
  curry (curry (funpairMapTbl V₀ V₁ V₂))

end

section
variable {α β ? : Type*}
  {V : NeighborhoodSystem α} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

theorem compC_apply (φ : (funSpace V₁ V₂).Element) (ψ : (funSpace V₀ V₁).Element) (x :
    V₀.Element) :
    (toApproxMap ((compC V₀ V₁ V₂).toElementMap (pair φ ψ))).toElementMap x
      = (toApproxMap φ).toElementMap ((toApproxMap ψ).toElementMap x) := by
  rw [compC, toElementMap_curry_apply, compMapTbl]
  simp only [toElementMap_comp, toElementMap_paired, toElementMap_proj₀,
    toElementMap_proj₁,
    fst_pair, snd_pair, evalMap_apply]

theorem compC_eq_comp (φ : (funSpace V₁ V₂).Element) (ψ : (funSpace V₀ V₁).Element) :
    toApproxMap ((compC V₀ V₁ V₂).toElementMap (pair φ ψ)) = (toApproxMap φ).comp (
    toApproxMap ψ) := by
  apply ext_of_toElementMap
  intro x
  rw [toElementMap_comp, compC_apply]

theorem constC_apply (k : V₁.Element) (x : V₀.Element) :
    (toApproxMap ((constC V₀ V₁).toElementMap k)).toElementMap x = k := by
  rw [constC, toElementMap_curry_apply, toElementMap_proj₀, fst_pair]

theorem constC_eq_constMap (k : V₁.Element) :
    toApproxMap ((constC V₀ V₁).toElementMap k) = constMap V₀ k := by
  apply ext_of_toElementMap
  intro x
  rw [constC_apply, toElementMap_constMap]

theorem curryC_toApproxMap (φ : (funSpace (prod V₀ V₁) V₂).Element) :
    toApproxMap ((curryC V₀ V₁ V₂).toElementMap φ) = curry (toApproxMap φ) := by
  rw [curryC, toElementMap_ofIso]
```

```
  show toApproxMap (toFilter (curry (toApproxMap φ))) = curry (toApproxMap φ)
  have he := (funSpaceEquiv V₀ (funSpace V₁ V₂)).apply_symm_apply (curry (toApproxMap φ
    ))
  rwa [funSpaceEquiv_apply, funSpaceEquiv_symm_apply] at he

theorem curryC_apply (φ : (funSpace (prod V₀ V₁) V₂).Element) (x : V₀.Element) (y : V₁.
    Element) :
    (toApproxMap ((toApproxMap ((curryC V₀ V₁ V₂).toElementMap φ)).toElementMap x)).
    toElementMap y
      = (toApproxMap φ).toElementMap (pair x y) := by
  rw [curryC_toApproxMap, toElementMap_curry_apply]

theorem evalC_apply (φ : (funSpace V₀ V₁).Element) (x : V₀.Element) :
    (evalC V₀ V₁).toElementMap (pair φ x) = (toApproxMap φ).toElementMap x := by
  rw [evalC, evalMap_apply]

theorem fixC_apply (φ : (funSpace V V).Element) :
    (fixC V).toElementMap φ = (toApproxMap φ).fixElement := by
  rw [fixC, fixMap_toElementMap]

theorem fixC_fixed (φ : (funSpace V V).Element) :
    (toApproxMap φ).toElementMap ((fixC V).toElementMap φ) = (fixC V).toElementMap φ
    := by
  rw [fixC]; exact fixMap_fixed V φ

theorem funpairC_apply (φ : (funSpace V₂ V₀).Element) (ψ : (funSpace V₂ V₁).Element)
    (x : V₂.Element) :
    (toApproxMap ((toApproxMap ((funpairC V₀ V₁ V₂).toElementMap φ)).toElementMap ψ)).
    toElementMap x
      = pair ((toApproxMap φ).toElementMap x) ((toApproxMap ψ).toElementMap x) := by
  rw [funpairC, toElementMap_curry_apply, toElementMap_curry_apply, funpairMapTbl]
  simp only [toElementMap_paired, toElementMap_comp, toElementMap_proj₀,
    toElementMap_proj₁,
    fst_pair, snd_pair, evalMap_apply]

theorem funpairC_eq_paired (φ : (funSpace V₂ V₀).Element) (ψ : (funSpace V₂ V₁).Element
    ) :
    toApproxMap ((toApproxMap ((funpairC V₀ V₁ V₂).toElementMap φ)).toElementMap ψ)
      = paired (toApproxMap φ) (toApproxMap ψ) := by
  apply ext_of_toElementMap
  intro x
  rw [funpairC_apply, toElementMap_paired]

theorem pairC_apply (x : V₀.Element) (y : V₁.Element) :
    (toApproxMap ((pairC V₀ V₁).toElementMap x)).toElementMap y = pair x y := by
  rw [pairC, toElementMap_curry_apply, toElementMap_idMap]

end

section
variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

namespace ApproximableMap

def secFixX (τ : ApproximableMap (prod V₀ V₁) V₀) : ApproximableMap V₁ V₀ :=
  (fixMap V₀).comp (curry (τ.comp (swapC V₁ V₀)))
```

```
def outerOp (τ : ApproximableMap (prod V₀ V₁) V₀) (σ : ApproximableMap (prod V₀ V₁) V₁)
    :
    ApproximableMap V₁ V₁ :=
  σ.comp (paired (secFixX τ) (idMap V₁))

def sectionX (τ : ApproximableMap (prod V₀ V₁) V₀) (y : V₁.Element) : ApproximableMap V₀
     V₀ :=
  toApproxMap ((curry (τ.comp (swapC V₁ V₀))).toElementMap y)

theorem outerOp_apply (τ : ApproximableMap (prod V₀ V₁) V₀) (σ : ApproximableMap (prod
    V₀ V₁) V₁)
    (y : V₁.Element) :
    (outerOp τ σ).toElementMap y = σ.toElementMap (pair ((secFixX τ).toElementMap y) y)
     := by
  rw [outerOp, toElementMap_comp, toElementMap_paired, toElementMap_idMap]

theorem secFixX_apply (τ : ApproximableMap (prod V₀ V₁) V₀) (y : V₁.Element) :
    (secFixX τ).toElementMap y = (sectionX τ y).fixElement := by
  rw [secFixX, toElementMap_comp, fixMap_toElementMap, sectionX]

theorem sectionX_apply (τ : ApproximableMap (prod V₀ V₁) V₀) (y : V₁.Element) (x : V₀.
    Element) :
    (sectionX τ y).toElementMap x = τ.toElementMap (pair x y) := by
  rw [sectionX, toElementMap_curry_apply, toElementMap_comp, swapC_apply]

theorem secFixX_isFixed (τ : ApproximableMap (prod V₀ V₁) V₀) (y : V₁.Element) :
    τ.toElementMap (pair ((secFixX τ).toElementMap y) y) = (secFixX τ).toElementMap y
    := by
  rw [secFixX_apply, ← sectionX_apply, toElementMap_fixElement]

end ApproximableMap
end
end DomainTheory.NeighbourhoodSystems
end
```

3.6.7 Theorem 5.6 — partial recursive functions

Theorem_5_6.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Example_4_3
public import Mathlib.Computability.PartrecBasis
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Exercise_5_11
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Lemma_3_6

@[expose] public section
```

```
namespace DomainTheory.NeighbourhoodSystems.Theorem56
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap
open DomainTheory.NeighbourhoodSystems.Example43 (N natElem zeroElt succMap predMap
    zeroMap
  succMap_natElem succMap_bot predMap_natElem_succ predMap_natElem_zero predMap_bot
  zeroMap_natElem_zero zeroMap_natElem_succ zeroMap_bot constLiftN constLiftN_natElem)
open DomainTheory.NeighbourhoodSystems.Exercise326 (cond)

section

def kSel : ApproximableMap (prod (funSpace (prod N N) N) (prod N N)) (funSpace (prod N
     N) N) :=
  proj₀ (funSpace (prod N N) N) (prod N N)
end

section

def qSel : ApproximableMap (prod (funSpace (prod N N) N) (prod N N)) (prod N N) :=
  proj₁ (funSpace (prod N N) N) (prod N N)
end

section

def argX : ApproximableMap (prod (funSpace (prod N N) N) (prod N N)) N := (proj₀ N N).
    comp qSel
end

section

def argY : ApproximableMap (prod (funSpace (prod N N) N) (prod N N)) N := (proj₁ N N).
    comp qSel
end

section
section Mu

variable (f : ApproximableMap (prod N N) N)

def muBody : ApproximableMap (prod (funSpace (prod N N) N) (prod N N)) N :=
  (cond N).comp
    (paired (zeroMap.comp (f.comp qSel))
      (paired argX
        ((evalMap (prod N N) N).comp
          (paired kSel (paired (succMap.comp argX) argY)))))

end Mu
end

section
section Mu

variable (f : ApproximableMap (prod N N) N)

def muOp : ApproximableMap (funSpace (prod N N) N) (funSpace (prod N N) N) :=
  curry (muBody f)
```

```
end Mu
end

section
section Mu

variable (f : ApproximableMap (prod N N) N)

def muRec : ApproximableMap (prod N N) N := toApproxMap (muOp f).fixElement

end Mu
end

section
section Mu

variable (f : ApproximableMap (prod N N) N)

def muMap : ApproximableMap N N := muRec f |>.comp (paired (constLiftN N (fun _ =>
    zeroElt)) (idMap N))

end Mu
end

section
section PrimRec

variable (f : ApproximableMap N N) (g : ApproximableMap (prod N (prod N N)) N)

def primBody : ApproximableMap (prod (funSpace (prod N N) N) (prod N N)) N :=
  (cond N).comp
    (paired (zeroMap.comp argX)
      (paired (f.comp argY)
        (g.comp
          (paired (predMap.comp argX)
            (paired argY
              ((evalMap (prod N N) N).comp
                (paired kSel (paired (predMap.comp argX) argY)))))))))

end PrimRec
end

section
section PrimRec

variable (f : ApproximableMap N N) (g : ApproximableMap (prod N (prod N N)) N)

def primOp : ApproximableMap (funSpace (prod N N) N) (funSpace (prod N N) N) :=
  curry (primBody f g)

end PrimRec
end

section
section PrimRec
```

```
variable (f : ApproximableMap N N) (g : ApproximableMap (prod N (prod N N)) N)

def primRec : ApproximableMap (prod N N) N := toApproxMap (primOp f g).fixElement

end PrimRec
end

section

def strictId : ApproximableMap N N :=
  (cond N).comp (paired zeroMap (paired (idMap N) (idMap N)))
end

section

def strictProj₀ : ApproximableMap (prod N N) N :=
  (cond N).comp
    (paired (zeroMap.comp (proj₁ N N))
      (paired (proj₀ N N) (proj₀ N N)))
end

section

theorem T_bot_eq : (Example43.T).bot = Example23.botElt :=
  le_antisymm ((Example43.T).bot_le _) (Example23.botElt_le _)
end

section
section Mu

variable (f : ApproximableMap (prod N N) N)

theorem muBody_apply (k : (funSpace (prod N N) N).Element) (x y : N.Element) :
    (muBody f).toElementMap (pair k (pair x y)) =
      (cond N).toElementMap
        (pair (zeroMap.toElementMap (f.toElementMap (pair x y)))
          (pair x ((toApproxMap k).toElementMap (pair (succMap.toElementMap x) y))))
    := by
  rw [muBody, toElementMap_comp]
  simp only [argX, argY, kSel, qSel, toElementMap_paired, toElementMap_comp,
    toElementMap_proj₀,
    toElementMap_proj₁, fst_pair, snd_pair, evalMap_apply]

end Mu
end

section
section Mu

variable (f : ApproximableMap (prod N N) N)

theorem muMap_natElem (m : ℕ) :
    (muMap f).toElementMap (natElem m) = (muRec f).toElementMap (pair zeroElt (natElem
     m)) := by
  rw [muMap, toElementMap_comp, toElementMap_paired, toElementMap_idMap,
```

```
    constLiftN_natElem]

end Mu
end

section
section Mu

variable (f : ApproximableMap (prod N N) N)

theorem muRec_rec (x y : N.Element) :
    (muRec f).toElementMap (pair x y) =
      (cond N).toElementMap
        (pair (zeroMap.toElementMap (f.toElementMap (pair x y)))
          (pair x ((muRec f).toElementMap (pair (succMap.toElementMap x) y)))) := by
  have hfix : (muOp f).toElementMap (muOp f).fixElement = (muOp f).fixElement :=
    toElementMap_fixElement (muOp f)
  have hval := toElementMap_curry_apply (muBody f) (muOp f).fixElement (pair x y)
  rw [← muOp, hfix] at hval
  rw [muRec, hval, muBody_apply]

end Mu
end

section
section Mu

variable (f : ApproximableMap (prod N N) N)

theorem muRec_bot {n m : ℕ}
    (h : f.toElementMap (pair (natElem n) (natElem m)) = N.bot) :
    (muRec f).toElementMap (pair (natElem n) (natElem m)) = N.bot := by
  rw [muRec_rec, h, zeroMap_bot, T_bot_eq, Exercise326.cond_bot]

end Mu
end

section
section Mu

variable (f : ApproximableMap (prod N N) N)

theorem muRec_found {n m : ℕ}
    (h : f.toElementMap (pair (natElem n) (natElem m)) = natElem 0) :
    (muRec f).toElementMap (pair (natElem n) (natElem m)) = natElem n := by
  rw [muRec_rec, h, zeroMap_natElem_zero, Exercise326.cond_true]

end Mu
end

section
section Mu

variable (f : ApproximableMap (prod N N) N)

theorem muRec_step {n m j : ℕ}
```

```
    (h : f.toElementMap (pair (natElem n) (natElem m)) = natElem (j + 1)) :
    (muRec f).toElementMap (pair (natElem n) (natElem m)) =
      (muRec f).toElementMap (pair (natElem (n + 1)) (natElem m)) := by
  rw [muRec_rec, h, zeroMap_natElem_succ, Exercise326.cond_false, succMap_natElem]

end Mu
end

section
section Mu

variable (f : ApproximableMap (prod N N) N)

theorem muRec_climb (m : ℕ) :
    ∀ (k n : ℕ), (∀ i < k, ∃ j, f.toElementMap (pair (natElem (n + i)) (natElem m)) =
    natElem (j + 1)) →
      (muRec f).toElementMap (pair (natElem n) (natElem m)) =
        (muRec f).toElementMap (pair (natElem (n + k)) (natElem m)) := by
  intro k
  induction k with
  | zero => intro n _; rw [Nat.add_zero]
  | succ k ih =>
    intro n h
    obtain ⟨j, hj⟩ := h 0 (Nat.succ_pos k)
    rw [Nat.add_zero] at hj
    have key := ih (n + 1) (fun i hi => by
      obtain ⟨j', hj'⟩ := h (i + 1) (by omega)
      exact ⟨j', by rw [show n + 1 + i = n + (i + 1) by omega]; exact hj'⟩)
    rw [muRec_step f hj, key, show n + 1 + k = n + (k + 1) by omega]

end Mu
end

section
section Mu

variable (f : ApproximableMap (prod N N) N)

theorem muMap_eq_least {m n₀ : ℕ}
    (hzero : f.toElementMap (pair (natElem n₀) (natElem m)) = natElem 0)
    (hpos : ∀ i < n₀, ∃ j, f.toElementMap (pair (natElem i) (natElem m)) = natElem (j +
    1)) :
    (muMap f).toElementMap (natElem m) = natElem n₀ := by
  rw [muMap_natElem]
  have hclimb := muRec_climb f m n₀ 0 (by simpa using hpos)
  rw [show (zeroElt : N.Element) = natElem 0 from rfl, hclimb, Nat.zero_add]
  exact muRec_found f hzero

end Mu
end

section
section PrimRec

variable (f : ApproximableMap N N) (g : ApproximableMap (prod N (prod N N)) N)
```

```
theorem primBody_apply (k : (funSpace (prod N N) N).Element) (x y : N.Element) :
    (primBody f g).toElementMap (pair k (pair x y)) =
      (cond N).toElementMap
        (pair (zeroMap.toElementMap x)
          (pair (f.toElementMap y)
            (g.toElementMap
              (pair (predMap.toElementMap x)
                (pair y ((toApproxMap k).toElementMap
                  (pair (predMap.toElementMap x) y)))))))) := by
  rw [primBody, toElementMap_comp]
  simp only [argX, argY, kSel, qSel, toElementMap_paired, toElementMap_comp,
    toElementMap_proj₀,
    toElementMap_proj₁, fst_pair, snd_pair, evalMap_apply]

end PrimRec
end

section
section PrimRec

variable (f : ApproximableMap N N) (g : ApproximableMap (prod N (prod N N)) N)

theorem primRec_rec (x y : N.Element) :
    (primRec f g).toElementMap (pair x y) =
      (cond N).toElementMap
        (pair (zeroMap.toElementMap x)
          (pair (f.toElementMap y)
            (g.toElementMap
              (pair (predMap.toElementMap x)
                (pair y ((primRec f g).toElementMap
                  (pair (predMap.toElementMap x) y)))))))) := by
  have hfix : (primOp f g).toElementMap (primOp f g).fixElement = (primOp f g).
    fixElement :=
    toElementMap_fixElement (primOp f g)
  have hval := toElementMap_curry_apply (primBody f g) (primOp f g).fixElement (pair x
     y)
  rw [← primOp, hfix] at hval
  rw [primRec, hval, primBody_apply]

end PrimRec
end

section
section PrimRec

variable (f : ApproximableMap N N) (g : ApproximableMap (prod N (prod N N)) N)

theorem primRec_bot (m : ℕ) :
    (primRec f g).toElementMap (pair N.bot (natElem m)) = N.bot := by
  rw [primRec_rec, zeroMap_bot, T_bot_eq, Exercise326.cond_bot]

end PrimRec
end

section
section PrimRec
```

```
variable (f : ApproximableMap N N) (g : ApproximableMap (prod N (prod N N)) N)

theorem primRec_succ (n m : ℕ) :
    (primRec f g).toElementMap (pair (natElem (n + 1)) (natElem m)) =
      g.toElementMap
        (pair (natElem n)
          (pair (natElem m) ((primRec f g).toElementMap (pair (natElem n) (natElem m))
    ))) := by
  rw [primRec_rec, zeroMap_natElem_succ, Exercise326.cond_false, predMap_natElem_succ]

end PrimRec
end

section
section PrimRec

variable (f : ApproximableMap N N) (g : ApproximableMap (prod N (prod N N)) N)

theorem primRec_zero (m : ℕ) :
    (primRec f g).toElementMap (pair (natElem 0) (natElem m)) = f.toElementMap (
    natElem m) := by
  rw [primRec_rec, zeroMap_natElem_zero, Exercise326.cond_true]

end PrimRec
end

section
theorem strictId_bot : strictId.toElementMap N.bot = N.bot := by
  rw [strictId, toElementMap_comp]
  simp only [toElementMap_paired, toElementMap_idMap]
  rw [zeroMap_bot, T_bot_eq, Exercise326.cond_bot]
end

section
theorem strictId_natElem (n : ℕ) : strictId.toElementMap (natElem n) = natElem n := by
  rw [strictId, toElementMap_comp]
  simp only [toElementMap_paired, toElementMap_idMap]
  cases n with
  | zero => rw [zeroMap_natElem_zero, Exercise326.cond_true]
  | succ k => rw [zeroMap_natElem_succ, Exercise326.cond_false]
end

section
theorem strictProj₀_apply (x y : N.Element) :
    strictProj₀.toElementMap (pair x y) =
      (cond N).toElementMap (pair (zeroMap.toElementMap y) (pair x x)) := by
  rw [strictProj₀, toElementMap_comp]
  simp only [toElementMap_paired, toElementMap_comp, toElementMap_proj₀,
    toElementMap_proj₁,
    fst_pair, snd_pair]
end

section

theorem strictProj₀_bot_left (m : ℕ) :
```

```
    strictProj₀.toElementMap (pair N.bot (natElem m)) = N.bot := by
  rw [strictProj₀_apply]
  cases m with
  | zero => rw [zeroMap_natElem_zero, Exercise326.cond_true]
  | succ k => rw [zeroMap_natElem_succ, Exercise326.cond_false]
end

section

theorem strictProj₀_bot_right (n : ℕ) :
    strictProj₀.toElementMap (pair (natElem n) N.bot) = N.bot := by


  rw [strictProj₀_apply, zeroMap_bot, T_bot_eq, Exercise326.cond_bot]
end

section

theorem strictProj₀_natElem (n m : ℕ) :
    strictProj₀.toElementMap (pair (natElem n) (natElem m)) = natElem n := by
  rw [strictProj₀_apply]
  cases m with
  | zero => rw [zeroMap_natElem_zero, Exercise326.cond_true]
  | succ k => rw [zeroMap_natElem_succ, Exercise326.cond_false]
end

end DomainTheory.NeighbourhoodSystems.Theorem56

section

namespace DomainTheory.NeighbourhoodSystems.Theorem56Full
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap
open DomainTheory.NeighbourhoodSystems.Example43 (N natElem zeroElt succMap predMap
    zeroMap
  succMap_natElem succMap_bot predMap_natElem_succ predMap_natElem_zero predMap_bot
  zeroMap_natElem_zero zeroMap_natElem_succ zeroMap_bot constLiftN)
open DomainTheory.NeighbourhoodSystems.Exercise326 (cond)
open DomainTheory.NeighbourhoodSystems.Exercise511 (head tail push)

section

def optElem : Option ℕ → N.Element
  | none => N.bot
  | some n => natElem n
end

section

abbrev ? : NeighborhoodSystem (ℕ × ℕ) := iterSys N
end

section

def ArgLike (z : ?.Element) : Prop := ∀ j, component z j = N.bot ∨ ∃ k, component z j
    = natElem k
end
```

```
section

def argElem {n : ℕ} (a : Fin n → Option ℕ) : ?.Element :=
  ofSeq (fun i => if h : i < n then optElem (a ⟨i, h⟩) else N.bot)
end

section

def vecElem {n : ℕ} (v : List.Vector ℕ n) : ?.Element :=
  argElem (fun i => some (v.get i))
end

section

structure LamDef {n : ℕ} (φ : ApproximableMap ? N) (f : List.Vector ℕ n →. ℕ) : Prop
    where
  defined : ∀ (v : List.Vector ℕ n) (c : ℕ), c ∈ f v → φ.toElementMap (vecElem v) =
    natElem c
  undef : ∀ (v : List.Vector ℕ n), ¬ (f v).Dom → φ.toElementMap (vecElem v) = N.bot
  strict : ∀ (z : ?.Element), ArgLike z → ∀ i, i < n → component z i = N.bot →
    φ.toElementMap z = N.bot
end

section
@[simp] theorem component_argElem {n : ℕ} (a : Fin n → Option ℕ) (i : ℕ) :
    component (argElem a) i = if h : i < n then optElem (a ⟨i, h⟩) else N.bot := by
  rw [argElem, component_ofSeq]
end

section
@[simp] theorem component_vecElem {n : ℕ} (v : List.Vector ℕ n) (i : ℕ) :
    component (vecElem v) i = if h : i < n then natElem (v.get ⟨i, h⟩) else N.bot := by
  rw [vecElem, component_argElem]; split <;> rfl
end

section
section Rfind

variable (φf : ApproximableMap ? N)

def evalAt (z : ?.Element) : ApproximableMap (funSpace ? N) N :=
  (evalMap ? N).comp (paired (idMap (funSpace ? N)) (constMap (funSpace ? N) z))

end Rfind
end

section
section Rfind

variable (φf : ApproximableMap ? N)

def findBody : ApproximableMap (prod (funSpace ? N) ?) N :=
  (cond N).comp
    (paired (zeroMap.comp (φf.comp (proj₁ (funSpace ? N) ?)))
      (paired ((head N).comp (proj₁ (funSpace ? N) ?))
        ((evalMap ? N).comp
```

```
          (paired (proj₀ (funSpace ? N) ?)
            ((push N).comp
              (paired (succMap.comp ((head N).comp (proj₁ (funSpace ? N) ?)))
                ((tail N).comp (proj₁ (funSpace ? N) ?))))))))

end Rfind
end

section
section Rfind

variable (φf : ApproximableMap ? N)

def findOp : ApproximableMap (funSpace ? N) (funSpace ? N) := curry (findBody φf)

end Rfind
end

section

def guard1 (j : ℕ) (φ : ApproximableMap ? N) : ApproximableMap ? N :=
  (cond N).comp (paired (zeroMap.comp (projN N j)) (paired φ φ))
end

section

def oneArg : ApproximableMap N ? := (push N).comp (paired (idMap N) (constMap N ?.bot)
    )
end

section
section Prec

variable (φf φg : ApproximableMap ? N)

def precBody : ApproximableMap (prod (funSpace ? N) ?) N :=
  (cond N).comp
    (paired (zeroMap.comp ((head N).comp (proj₁ (funSpace ? N) ?)))
      (paired (φf.comp ((tail N).comp (proj₁ (funSpace ? N) ?)))
        (φg.comp
          ((push N).comp
            (paired (predMap.comp ((head N).comp (proj₁ (funSpace ? N) ?)))
              ((push N).comp
                (paired
                  ((evalMap ? N).comp
                    (paired (proj₀ (funSpace ? N) ?)
                      ((push N).comp
                        (paired (predMap.comp ((head N).comp (proj₁ (funSpace ? N) ?)))
                          ((tail N).comp (proj₁ (funSpace ? N) ?))))))
                  ((tail N).comp (proj₁ (funSpace ? N) ?)))))))))

end Prec
end

section
section Prec
```

```
variable (φf φg : ApproximableMap ? N)

def recOp : ApproximableMap (funSpace ? N) (funSpace ? N) := curry (precBody φf φg)

end Prec
end

section
section Prec

variable (φf φg : ApproximableMap ? N)

def recMap : ApproximableMap ? N := toApproxMap (recOp φf φg).fixElement

end Prec
end

section
section Rfind

variable (φf : ApproximableMap ? N)

def rfindZeroPred {n : ℕ} (f : List.Vector ℕ (n + 1) → ℕ) (v : List.Vector ℕ n) : ℕ
    →. Bool :=
  fun k => Part.some (decide (f (k ::? v) = 0))

end Rfind
end

section
section Rfind

variable (φf : ApproximableMap ? N)

def searchMap : ApproximableMap ? N := toApproxMap (findOp φf).fixElement

end Rfind
end

section
section Rfind

variable (φf : ApproximableMap ? N)

def findMap : ApproximableMap ? N :=
  (searchMap φf).comp ((push N).comp (paired (constMap ? (natElem 0)) (idMap ?)))

end Rfind
end

section

def strictGuardN : ℕ → ApproximableMap ? N → ApproximableMap ? N
  | 0, φ => φ
  | n + 1, φ => guard1 n (strictGuardN n φ)
```

```
end

section

def tupleMap : (n : ℕ) → (Fin n → ApproximableMap ? N) → ApproximableMap ? ?
  | 0, _ => constMap ? ?.bot
  | n + 1, gs => (push N).comp (paired (gs 0) (tupleMap n (fun i => gs i.succ)))
end

section

theorem T_bot_eq : (Example43.T).bot = Example23.botElt :=
  le_antisymm ((Example43.T).bot_le _) (Example23.botElt_le _)
end

section
theorem argElem_argLike {n : ℕ} (a : Fin n → Option ℕ) : ArgLike (argElem a) := by
  intro j
  rw [component_argElem]
  split
  · cases h : a _ with
    | none => exact Or.inl rfl
    | some k => exact Or.inr ⟨k, rfl⟩
  · exact Or.inl rfl
end

section

theorem component_argElem_none {n : ℕ} (a : Fin n → Option ℕ) (i : Fin n) (hi : a i =
     none) :
    component (argElem a) (i : ℕ) = N.bot := by
  rw [component_argElem, dite_eq_left i.isLt, Fin.eta, hi]; rfl
end

section

theorem component_bot (i : ℕ) : component (?.bot) i = N.bot := by
  have hbot : (?.bot) = ofSeq (fun _ => N.bot) :=
    le_antisymm (?.bot_le _)
      (le_of_component_le (fun i => by rw [component_ofSeq]; exact N.bot_le _))
  rw [hbot, component_ofSeq]
end

section
theorem component_push_succ (x : N.Element) (s : ?.Element) (j : ℕ) :
    component ((push N).toElementMap (pair x s)) (j + 1) = component s j := by
  rw [← Exercise511.component_tail, Exercise511.tail_push]
end

section
theorem component_push_zero (x : N.Element) (s : ?.Element) :
    component ((push N).toElementMap (pair x s)) 0 = x := by
  rw [← Exercise511.head_apply, Exercise511.head_push]
end

section
```

```
theorem component_vecElem_lt {n : ℕ} (v : List.Vector ℕ n) {j : ℕ} (hj : j < n) :
    component (vecElem v) j = natElem (v.get ⟨j, hj⟩) := by
  rw [component_vecElem, dite_eq_left hj]
end

section

theorem eq_of_component_eq {z z' : ?.Element}
    (h : ∀ n, component z n = component z' n) : z = z' :=
  le_antisymm (le_of_component_le (fun n => (h n).le))
    (le_of_component_le (fun n => (h n).ge))
end

section
section Rfind

variable (φf : ApproximableMap ? N)

theorem evalAt_apply (z : ?.Element) (φ : (funSpace ? N).Element) :
    (evalAt z).toElementMap φ = (toApproxMap φ).toElementMap z := by
  rw [evalAt, toElementMap_comp, toElementMap_paired, toElementMap_idMap,
    toElementMap_constMap,
    evalMap_apply]

end Rfind
end

section
section Rfind

variable (φf : ApproximableMap ? N)

theorem findBody_apply (k : (funSpace ? N).Element) (z : ?.Element) :
    (findBody φf).toElementMap (pair k z) =
      (cond N).toElementMap
        (pair (zeroMap.toElementMap (φf.toElementMap z))
          (pair ((head N).toElementMap z)
            ((toApproxMap k).toElementMap
              ((push N).toElementMap
                (pair (succMap.toElementMap ((head N).toElementMap z))
                  ((tail N).toElementMap z)))))) := by
  rw [findBody, toElementMap_comp]
  simp only [toElementMap_paired, toElementMap_comp, toElementMap_proj₀,
    toElementMap_proj₁,
    fst_pair, snd_pair, evalMap_apply]

end Rfind
end

section
section Rfind

variable (φf : ApproximableMap ? N)

theorem findOp_iterElem_zero : (findOp φf).iterElem 0 = (funSpace ? N).bot := by
```

```
  rw [iterElem_eq_iterate, Function.iterate_zero_apply]

end Rfind
end

section
theorem guard1_apply (j : ℕ) (φ : ApproximableMap ? N) (z : ?.Element) :
    (guard1 j φ).toElementMap z =
      (cond N).toElementMap (pair (zeroMap.toElementMap (component z j))
        (pair (φ.toElementMap z) (φ.toElementMap z))) := by
  rw [guard1, toElementMap_comp]
  simp only [toElementMap_paired, toElementMap_comp, toElementMap_projN]
end

section
theorem guard1_bot (j : ℕ) (φ : ApproximableMap ? N) (z : ?.Element)
    (h : component z j = N.bot) : (guard1 j φ).toElementMap z = N.bot := by
  rw [guard1_apply, h, zeroMap_bot, T_bot_eq, Exercise326.cond_bot]
end

section

theorem guard1_inner_bot (j : ℕ) (φ : ApproximableMap ? N) (z : ?.Element)
    (hz : component z j = N.bot ∨ ∃ k, component z j = natElem k)
    (h : φ.toElementMap z = N.bot) : (guard1 j φ).toElementMap z = N.bot := by
  rcases hz with hb | ⟨k, hk⟩
  · exact guard1_bot j φ z hb
  · rw [guard1_apply, hk, h]
    cases k with
    | zero => rw [zeroMap_natElem_zero, Exercise326.cond_true]
    | succ m => rw [zeroMap_natElem_succ, Exercise326.cond_false]
end

section
theorem guard1_total (j : ℕ) (φ : ApproximableMap ? N) (z : ?.Element) {k : ℕ}
    (h : component z j = natElem k) : (guard1 j φ).toElementMap z = φ.toElementMap z
    := by
  rw [guard1_apply, h]
  cases k with
  | zero => rw [zeroMap_natElem_zero, Exercise326.cond_true]
  | succ m => rw [zeroMap_natElem_succ, Exercise326.cond_false]
end

section
section Rfind

variable (φf : ApproximableMap ? N)

theorem iterVal_succ (m : ℕ) (z : ?.Element) :
    (toApproxMap ((findOp φf).iterElem (m + 1))).toElementMap z =
      (cond N).toElementMap
        (pair (zeroMap.toElementMap (φf.toElementMap z))
          (pair ((head N).toElementMap z)
            ((toApproxMap ((findOp φf).iterElem m)).toElementMap
              ((push N).toElementMap
                (pair (succMap.toElementMap ((head N).toElementMap z))
```

```
                ((tail N).toElementMap z)))))) := by
  have h1 : (findOp φf).iterElem (m + 1) = (findOp φf).toElementMap ((findOp φf).
    iterElem m) := by
    rw [iterElem_eq_iterate, iterElem_eq_iterate, Function.iterate_succ', Function.
    comp_apply]
  rw [h1]
  have hval := toElementMap_curry_apply (findBody φf) ((findOp φf).iterElem m) z
  rw [← findOp] at hval
  rw [hval, findBody_apply]

end Rfind
end

section

theorem lamDef_coe_val {n : ℕ} {φ : ApproximableMap ? N} {g : List.Vector ℕ n → ℕ}
    (h : LamDef φ (g : List.Vector ℕ n →. ℕ)) (v : List.Vector ℕ n) :
    φ.toElementMap (vecElem v) = natElem (g v) :=
  h.defined v (g v) (by rw [PFun.coe_val]; exact Part.mem_some _)
end

section

theorem lamDef_congr {n : ℕ} {φ : ApproximableMap ? N} {f f' : List.Vector ℕ n →. ℕ}
    (h : ∀ v, f v = f' v) (hf : LamDef φ f) : LamDef φ f' where
  defined v c hc := hf.defined v c (by rw [h v]; exact hc)
  undef v hv := hf.undef v (by rw [h v]; exact hv)
  strict := hf.strict
end

section

theorem mem_mOfFn : ∀ {n : ℕ} (p : Fin n → Part ℕ) (w : List.Vector ℕ n),
    w ∈ List.Vector.mOfFn p ↔ ∀ i, w.get i ∈ p i
  | 0, p, w => by
      constructor
      · intro _ i; exact i.elim0
      · intro _
        show w ∈ (pure List.Vector.nil : Part _)
        rw [Part.pure_eq_some, Part.mem_some_iff]
        exact List.Vector.eq_nil w
  | n + 1, p, w => by
      have hmof : List.Vector.mOfFn p
          = (p 0).bind (fun a => (List.Vector.mOfFn fun i => p i.succ).bind
              (fun u => Part.some (a ::? u))) := by
        simp only [List.Vector.mOfFn, Part.bind_eq_bind, Part.pure_eq_some]
      rw [hmof, Part.mem_bind_iff]
      constructor
      · rintro ⟨a, ha, hrest⟩
        rw [Part.mem_bind_iff] at hrest
        obtain ⟨u, hu, hw⟩ := hrest
        rw [Part.mem_some_iff] at hw
        subst hw
        have hu' := (mem_mOfFn (fun i => p i.succ) u).mp hu
        intro i
        refine Fin.cases ?_ ?_ i
```

```
        · simpa using ha
        · intro k; simpa using hu' k
      · intro hall
        refine ⟨w.head, ?_, ?_⟩
        · have := hall 0; rwa [List.Vector.get_zero] at this
        · rw [Part.mem_bind_iff]
          refine ⟨w.tail, (mem_mOfFn (fun i => p i.succ) w.tail).mpr (fun k => ?_), ?_⟩
          · have h := hall k.succ
            rwa [← List.Vector.get_tail_succ w k] at h
          · rw [Part.mem_some_iff]; exact (List.Vector.cons_head_tail w).symm
end

section
theorem oneArg_bot : (oneArg).toElementMap N.bot = ?.bot := by
  rw [oneArg, toElementMap_comp, toElementMap_paired, toElementMap_idMap,
    toElementMap_constMap]
  apply eq_of_component_eq
  intro i
  cases i with
  | zero => rw [component_push_zero, component_bot]
  | succ k => rw [component_push_succ, component_bot, component_bot]
end

section
section Prec

variable (φf φg : ApproximableMap ? N)

theorem precBody_apply (k : (funSpace ? N).Element) (z : ?.Element) :
    (precBody φf φg).toElementMap (pair k z) =
      (cond N).toElementMap
        (pair (zeroMap.toElementMap ((head N).toElementMap z))
          (pair (φf.toElementMap ((tail N).toElementMap z))
            (φg.toElementMap
              ((push N).toElementMap
                (pair (predMap.toElementMap ((head N).toElementMap z))
                  ((push N).toElementMap
                    (pair ((toApproxMap k).toElementMap
                            ((push N).toElementMap
                              (pair (predMap.toElementMap ((head N).toElementMap z))
                                ((tail N).toElementMap z))))
                      ((tail N).toElementMap z)))))))) := by
  rw [precBody, toElementMap_comp]
  simp only [toElementMap_paired, toElementMap_comp, toElementMap_proj₀,
    toElementMap_proj₁,
    fst_pair, snd_pair, evalMap_apply]

end Prec
end

section
theorem push_natElem_vecElem {n : ℕ} (a : ℕ) (u : List.Vector ℕ n) :
    (push N).toElementMap (pair (natElem a) (vecElem u)) = vecElem (a ::? u) := by
  apply eq_of_component_eq
  intro j
  cases j with
```

```
  | zero =>
    rw [component_push_zero, component_vecElem, dite_eq_left (Nat.succ_pos n)]
    exact congrArg natElem (List.Vector.get_cons_zero a u).symm
  | succ k =>
    rw [component_push_succ, component_vecElem, component_vecElem]
    by_cases hk : k < n
    · rw [dite_eq_left hk, dite_eq_left (show k + 1 < n + 1 by omega)]
      exact congrArg natElem (List.Vector.get_cons_succ a u ⟨k, hk⟩).symm
    · rw [dite_eq_right hk, dite_eq_right (show ¬ k + 1 < n + 1 by omega)]
end

section
section Rfind

variable (φf : ApproximableMap ? N)

theorem findMap_vecElem {n : ℕ} (v : List.Vector ℕ n) :
    (findMap φf).toElementMap (vecElem v) = (searchMap φf).toElementMap (vecElem (0
    ::? v)) := by
  rw [findMap, toElementMap_comp, toElementMap_comp, toElementMap_paired,
    toElementMap_constMap,
    toElementMap_idMap, push_natElem_vecElem]

end Rfind
end

section
theorem oneArg_natElem (a : ℕ) :
    (oneArg).toElementMap (natElem a) = vecElem (a ::? (List.Vector.nil : List.Vector
    ℕ 0)) := by
  rw [oneArg, toElementMap_comp, toElementMap_paired, toElementMap_idMap,
    toElementMap_constMap]
  rw [show ?.bot = vecElem (List.Vector.nil : List.Vector ℕ 0) from ?_,
    push_natElem_vecElem]
  exact eq_of_component_eq (fun i => by rw [component_bot, component_vecElem,
    dite_eq_right (by omega)])
end

section

theorem realizer_value {n : ℕ} {φ : ApproximableMap ? N} {f : List.Vector ℕ n →. ℕ}
    (h : LamDef φ f) (v : List.Vector ℕ n) :
    φ.toElementMap (vecElem v) = N.bot ∨ ∃ k, φ.toElementMap (vecElem v) = natElem k
    := by
  by_cases hd : (f v).Dom
  · exact Or.inr ⟨(f v).get hd, h.defined v _ (Part.get_mem hd)⟩
  · exact Or.inl (h.undef v hd)
end

section
section Prec

variable (φf φg : ApproximableMap ? N)

theorem recMap_rec (z : ?.Element) :
    (recMap φf φg).toElementMap z =
```

```
      (cond N).toElementMap
        (pair (zeroMap.toElementMap ((head N).toElementMap z))
          (pair (φf.toElementMap ((tail N).toElementMap z))
            (φg.toElementMap
              ((push N).toElementMap
                (pair (predMap.toElementMap ((head N).toElementMap z))
                  ((push N).toElementMap
                    (pair ((recMap φf φg).toElementMap
                            ((push N).toElementMap
                              (pair (predMap.toElementMap ((head N).toElementMap z))
                                ((tail N).toElementMap z))))
                      ((tail N).toElementMap z)))))))) := by
  have hfix : (recOp φf φg).toElementMap (recOp φf φg).fixElement = (recOp φf φg).
    fixElement :=
    toElementMap_fixElement (recOp φf φg)
  have hval := toElementMap_curry_apply (precBody φf φg) (recOp φf φg).fixElement z
  rw [← recOp, hfix] at hval
  rw [recMap, hval, precBody_apply]

end Prec
end

section
section Prec

variable (φf φg : ApproximableMap ? N)

theorem recMap_eval {n : ℕ} (f₀ : List.Vector ℕ n → ℕ) (g₀ : List.Vector ℕ (n + 2) →
    ℕ)
    (hf : LamDef φf (f₀ : List.Vector ℕ n →. ℕ)) (hg : LamDef φg (g₀ : List.Vector ℕ
    (n + 2) →. ℕ))
    (u : List.Vector ℕ n) (d : ℕ) :
    (recMap φf φg).toElementMap (vecElem (d ::? u))
      = natElem (Nat.rec (motive := fun _ => ℕ) (f₀ u)
          (fun y IH => g₀ (y ::? IH ::? u)) d) := by
  induction d with
  | zero =>
    rw [← push_natElem_vecElem, recMap_rec, Exercise511.head_push, Exercise511.
    tail_push,
      zeroMap_natElem_zero, Exercise326.cond_true]
    exact lamDef_coe_val hf u
  | succ d ih =>
    rw [← push_natElem_vecElem, recMap_rec, Exercise511.head_push, Exercise511.
    tail_push,
      zeroMap_natElem_succ, Exercise326.cond_false, predMap_natElem_succ,
    push_natElem_vecElem, ih,
      push_natElem_vecElem, push_natElem_vecElem]
    exact lamDef_coe_val hg _

end Prec
end

section
section Rfind

variable (φf : ApproximableMap ? N)
```

```
theorem searchMap_rec (z : ?.Element) :
    (searchMap φf).toElementMap z =
      (cond N).toElementMap
        (pair (zeroMap.toElementMap (φf.toElementMap z))
          (pair ((head N).toElementMap z)
            ((searchMap φf).toElementMap
              ((push N).toElementMap
                (pair (succMap.toElementMap ((head N).toElementMap z))
                  ((tail N).toElementMap z)))))) := by
  have hfix : (findOp φf).toElementMap (findOp φf).fixElement = (findOp φf).fixElement
    :=
    toElementMap_fixElement (findOp φf)
  have hval := toElementMap_curry_apply (findBody φf) (findOp φf).fixElement z
  rw [← findOp, hfix] at hval
  rw [searchMap, hval, findBody_apply]

end Rfind
end

section
section Rfind

variable (φf : ApproximableMap ? N)

theorem searchMap_step_found {n : ℕ} {f : List.Vector ℕ (n + 1) → ℕ}
    (hf : LamDef φf (f : List.Vector ℕ (n + 1) →. ℕ)) (v : List.Vector ℕ n) (k : ℕ)
    (h0 : f (k ::? v) = 0) :
    (searchMap φf).toElementMap (vecElem (k ::? v)) = natElem k := by
  rw [← push_natElem_vecElem, searchMap_rec, Exercise511.head_push, Exercise511.
    tail_push,
    push_natElem_vecElem, lamDef_coe_val hf (k ::? v), h0, zeroMap_natElem_zero,
    Exercise326.cond_true]

end Rfind
end

section
section Rfind

variable (φf : ApproximableMap ? N)

theorem searchMap_step_next {n : ℕ} {f : List.Vector ℕ (n + 1) → ℕ}
    (hf : LamDef φf (f : List.Vector ℕ (n + 1) →. ℕ)) (v : List.Vector ℕ n) (k : ℕ)
    (hne : f (k ::? v) = 0) :
    (searchMap φf).toElementMap (vecElem (k ::? v)) =
      (searchMap φf).toElementMap (vecElem ((k + 1) ::? v)) := by
  obtain ⟨m, hm⟩ : ∃ m, f (k ::? v) = m + 1 := ⟨f (k ::? v) - 1, by omega⟩
  rw [← push_natElem_vecElem, searchMap_rec, Exercise511.head_push, Exercise511.
    tail_push,
    push_natElem_vecElem, lamDef_coe_val hf (k ::? v), hm, zeroMap_natElem_succ,
    Exercise326.cond_false, succMap_natElem, push_natElem_vecElem]

end Rfind
end
```

```
section
section Rfind

variable (φf : ApproximableMap ? N)

theorem searchMap_climb {n : ℕ} {f : List.Vector ℕ (n + 1) → ℕ}
    (hf : LamDef φf (f : List.Vector ℕ (n + 1) →. ℕ)) (v : List.Vector ℕ n) (m : ℕ)
    (hm0 : f (m ::? v) = 0) (hmin : ∀ i, i < m → f (i ::? v) = 0) :
    ∀ d j, j + d = m → (searchMap φf).toElementMap (vecElem (j ::? v)) = natElem m :=
   by
  intro d
  induction d with
  | zero =>
    intro j hj
    have hjm : j = m := by omega
    rw [hjm]
    exact searchMap_step_found φf hf v m hm0
  | succ d ih =>
    intro j hj
    have hjm : j < m := by omega
    rw [searchMap_step_next φf hf v j (hmin j hjm)]
    exact ih (j + 1) (by omega)

end Rfind
end

section

theorem strictGuardN_strict (n : ℕ) (φ : ApproximableMap ? N) (z : ?.Element)
    (hz : ArgLike z) {i : ℕ} (hi : i < n) (hb : component z i = N.bot) :
    (strictGuardN n φ).toElementMap z = N.bot := by
  induction n with
  | zero => exact absurd hi (Nat.not_lt_zero i)
  | succ m ih =>
    rw [strictGuardN]
    rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hlt | heq
    · exact guard1_inner_bot m _ z (hz m) (ih hlt)
    · exact guard1_bot m _ z (heq ▶ hb)
end

section

theorem strictGuardN_total (n : ℕ) (φ : ApproximableMap ? N) (z : ?.Element)
    (h : ∀ j, j < n → ∃ k, component z j = natElem k) :
    (strictGuardN n φ).toElementMap z = φ.toElementMap z := by
  induction n with
  | zero => rfl
  | succ m ih =>
    obtain ⟨k, hk⟩ := h m (Nat.lt_succ_self m)
    rw [strictGuardN, guard1_total m _ z hk]
    exact ih (fun j hj => h j (Nat.lt_succ_of_lt hj))
end

section
section Rfind
```

```
variable (φf : ApproximableMap ? N)

theorem toApproxMap_bot (z : ?.Element) :
    (toApproxMap ((funSpace ? N).bot)).toElementMap z = N.bot := by
  refine le_antisymm ?_ (N.bot_le _)
  have h2 := (funSpaceEquiv ? N).monotone
    ((funSpace ? N).bot_le ((funSpaceEquiv ? N).symm (constMap ? N.bot)))
  rw [OrderIso.apply_symm_apply, funSpaceEquiv_apply] at h2
  have h3 := (le_iff_toElementMap_le.mp h2) z
  rwa [toElementMap_constMap] at h3

end Rfind
end

section
section Rfind

variable (φf : ApproximableMap ? N)

theorem iterVal_zero (z : ?.Element) :
    (toApproxMap ((findOp φf).iterElem 0)).toElementMap z = N.bot := by
  rw [findOp_iterElem_zero, toApproxMap_bot]

end Rfind
end

section
section Rfind

variable (φf : ApproximableMap ? N)

theorem iterVal_bot {n : ℕ} {f : List.Vector ℕ (n + 1) → ℕ}
    (hf : LamDef φf (f : List.Vector ℕ (n + 1) →. ℕ)) (v : List.Vector ℕ n)
    (hdiv : ∀ k, f (k ::? v) = 0) :
    ∀ m k, (toApproxMap ((findOp φf).iterElem m)).toElementMap (vecElem (k ::? v)) = N
    .bot := by
  intro m
  induction m with
  | zero => intro k; exact iterVal_zero φf (vecElem (k ::? v))
  | succ m ih =>
    intro k
    have hne := hdiv k
    obtain ⟨j, hj⟩ : ∃ j, f (k ::? v) = j + 1 := ⟨f (k ::? v) - 1, by omega⟩
    rw [← push_natElem_vecElem, iterVal_succ, Exercise511.head_push, Exercise511.
    tail_push,
      push_natElem_vecElem, lamDef_coe_val hf (k ::? v), hj, zeroMap_natElem_succ,
      Exercise326.cond_false, succMap_natElem, push_natElem_vecElem]
    exact ih (k + 1)

end Rfind
end

section
section Rfind

variable (φf : ApproximableMap ? N)
```

```
theorem searchMap_diverge {n : ℕ} {f : List.Vector ℕ (n + 1) → ℕ}
    (hf : LamDef φf (f : List.Vector ℕ (n + 1) →. ℕ)) (v : List.Vector ℕ n)
    (hdiv : ∀ k, f (k ::? v) = 0) (k : ℕ) :
    (searchMap φf).toElementMap (vecElem (k ::? v)) = N.bot := by
  refine le_antisymm ?_ (N.bot_le _)
  rw [searchMap, ← evalAt_apply, fixElement_eq_iSupDirected, toElementMap_iSupDirected
    ]
  apply NeighborhoodSystem.iSupDirected_le
  intro m
  rw [evalAt_apply]
  exact le_of_eq (iterVal_bot φf hf v hdiv m k)

end Rfind
end

section
theorem tupleMap_succ (n : ℕ) (gs : Fin (n + 1) → ApproximableMap ? N) :
    tupleMap (n + 1) gs = (push N).comp (paired (gs 0) (tupleMap n (fun i => gs i.succ
    ))) := rfl
end

section

theorem component_tupleMap : ∀ (n : ℕ) (gs : Fin n → ApproximableMap ? N) (z : ?.
    Element)
    (i : ℕ) (hi : i < n),
    component ((tupleMap n gs).toElementMap z) i = (gs ⟨i, hi⟩).toElementMap z
  | 0, _, _, i, hi => absurd hi (Nat.not_lt_zero i)
  | n + 1, gs, z, 0, hi => by
      rw [tupleMap_succ, toElementMap_comp, toElementMap_paired, component_push_zero]
      exact congrArg (fun w => (gs w).toElementMap z) (Fin.ext (by simp))
  | n + 1, gs, z, i + 1, hi => by
      rw [tupleMap_succ, toElementMap_comp, toElementMap_paired, component_push_succ,
        component_tupleMap n (fun j => gs j.succ) z i (Nat.lt_of_succ_lt_succ hi)]
      rfl
end

section
theorem tupleMap_zero (gs : Fin 0 → ApproximableMap ? N) :
    tupleMap 0 gs = constMap ? ?.bot := rfl
end

section

theorem component_tupleMap_ge : ∀ (n : ℕ) (gs : Fin n → ApproximableMap ? N) (z : ?.
    Element)
    (i : ℕ), n ≤ i → component ((tupleMap n gs).toElementMap z) i = N.bot
  | 0, gs, z, i, _ => by rw [tupleMap_zero, toElementMap_constMap, component_bot]
  | n + 1, gs, z, i, hi => by
      obtain ⟨j, rfl⟩ : ∃ j, i = j + 1 := ⟨i - 1, by omega⟩
      rw [tupleMap_succ, toElementMap_comp, toElementMap_paired, component_push_succ]
      exact component_tupleMap_ge n (fun k => gs k.succ) z j (by omega)
end

section
```

```
theorem tupleMap_argLike {m nn : ℕ} (φg : Fin nn → ApproximableMap ? N)
    (g : Fin nn → List.Vector ℕ m →. ℕ) (hg : ∀ i, LamDef (φg i) (g i)) (v : List.
    Vector ℕ m) :
    ArgLike ((tupleMap nn φg).toElementMap (vecElem v)) := by
  intro i
  by_cases hi : i < nn
  · rw [component_tupleMap nn φg (vecElem v) i hi]; exact realizer_value (hg ⟨i, hi⟩) v
  · rw [component_tupleMap_ge nn φg (vecElem v) i (Nat.le_of_not_lt hi)]; exact Or.inl
    rfl
end



section

theorem tupleMap_vecElem_eq {m nn : ℕ} (φg : Fin nn → ApproximableMap ? N)
    (g : Fin nn → List.Vector ℕ m →. ℕ) (hg : ∀ i, LamDef (φg i) (g i))
    (v : List.Vector ℕ m) (w : List.Vector ℕ nn) (hw : ∀ i, w.get i ∈ g i v) :
    (tupleMap nn φg).toElementMap (vecElem v) = vecElem w := by
  apply eq_of_component_eq
  intro i
  by_cases hi : i < nn
  · rw [component_tupleMap nn φg (vecElem v) i hi, component_vecElem_lt w hi]
    exact (hg ⟨i, hi⟩).defined v (w.get ⟨i, hi⟩) (hw ⟨i, hi⟩)
  · rw [component_tupleMap_ge nn φg (vecElem v) i (Nat.le_of_not_lt hi),
    component_vecElem,
      dite_eq_right hi]
end

section

theorem vecElem_totals {n : ℕ} (v : List.Vector ℕ n) :
    ∀ j, j < n → ∃ k, component (vecElem v) j = natElem k :=
  fun j hj => ⟨v.get ⟨j, hj⟩, component_vecElem_lt v hj⟩
end

section

theorem lamDef_of_inner {n : ℕ} (inner : ApproximableMap ? N) (f : List.Vector ℕ n →.
    ℕ)
    (hdef : ∀ (v : List.Vector ℕ n) (c : ℕ), c ∈ f v → inner.toElementMap (vecElem v)
    = natElem c)
    (hundef : ∀ (v : List.Vector ℕ n), ¬ (f v).Dom → inner.toElementMap (vecElem v) =
    N.bot) :
    LamDef (strictGuardN n inner) f where
  defined v c hc := by
    rw [strictGuardN_total n inner (vecElem v) (vecElem_totals v)]; exact hdef v c hc
  undef v hv := by
    rw [strictGuardN_total n inner (vecElem v) (vecElem_totals v)]; exact hundef v hv
  strict z hz i hi hb := strictGuardN_strict n inner z hz hi hb
end

section

theorem lamDef_comp {m nn : ℕ} (f : List.Vector ℕ nn →. ℕ) (g : Fin nn → List.Vector
    ℕ m →. ℕ)
```

```
    (φf : ApproximableMap ? N) (hf : LamDef φf f)
    (φg : Fin nn → ApproximableMap ? N) (hg : ∀ i, LamDef (φg i) (g i)) :
    LamDef (strictGuardN m (φf.comp (tupleMap nn φg)))
      (fun v => (List.Vector.mOfFn fun i => g i v) >>= f) := by
  refine lamDef_of_inner (φf.comp (tupleMap nn φg)) _ ?_ ?_
  · intro v c hc
    have hc' : c ∈ (List.Vector.mOfFn fun i => g i v).bind (fun w => f w) := hc
    rw [Part.mem_bind_iff] at hc'
    obtain ⟨w, hw, hcw⟩ := hc'
    rw [toElementMap_comp, tupleMap_vecElem_eq φg g hg v w ((mem_mOfFn _ w).mp hw)]
    exact hf.defined w c hcw
  · intro v hv
    rw [toElementMap_comp]
    by_cases hall : ∀ i, (g i v).Dom
    · set w : List.Vector ℕ nn := List.Vector.ofFn (fun i => (g i v).get (hall i)) with
     hw_def
      have hwget : ∀ i, w.get i ∈ g i v := by
        intro i; rw [hw_def, List.Vector.get_ofFn]; exact Part.get_mem (hall i)
      rw [tupleMap_vecElem_eq φg g hg v w hwget]
      refine hf.undef w (fun hfw => hv ?_)
      have hmem : (f w).get hfw ∈ (List.Vector.mOfFn fun i => g i v).bind (fun w => f
    w) := by
        rw [Part.mem_bind_iff]
        exact ⟨w, (mem_mOfFn _ w).mpr hwget, Part.get_mem hfw⟩
      exact Part.dom_iff_mem.mpr ⟨_, hmem⟩
    · rw [not_forall] at hall
      obtain ⟨j, hj⟩ := hall
      refine hf.strict ((tupleMap nn φg).toElementMap (vecElem v))
        (tupleMap_argLike φg g hg v) j j.isLt ?_
      rw [component_tupleMap nn φg (vecElem v) j j.isLt, Fin.eta]
      exact (hg j).undef v hj
end

section
section Prec

variable (φf φg : ApproximableMap ? N)

theorem lamDef_prec {n : ℕ} (f₀ : List.Vector ℕ n → ℕ) (g₀ : List.Vector ℕ (n + 2) →
    ℕ)
    (hf : LamDef φf (f₀ : List.Vector ℕ n →. ℕ))
    (hg : LamDef φg (g₀ : List.Vector ℕ (n + 2) →. ℕ)) :
    LamDef (strictGuardN (n + 1) (recMap φf φg))
      (((fun v : List.Vector ℕ (n + 1) =>
        v.head.rec (f₀ v.tail) fun y IH => g₀ (y ::? IH ::? v.tail)) :
        List.Vector ℕ (n + 1) → ℕ) : List.Vector ℕ (n + 1) →. ℕ) := by
  refine lamDef_of_inner (recMap φf φg) _ (fun v c hc => ?_)
    (fun v hv => by rw [PFun.coe_val] at hv; exact absurd trivial hv)
  rw [PFun.coe_val, Part.mem_some_iff] at hc
  subst hc
  obtain ⟨d, u, rfl⟩ := List.Vector.exists_eq_cons v
  rw [List.Vector.head_cons, List.Vector.tail_cons]
  exact recMap_eval φf φg f₀ g₀ hf hg u d

end Prec
end
```

```
section

theorem lamDef_primComp {m nn : ℕ} (f₀ : List.Vector ℕ nn → ℕ)
    (g₀ : Fin nn → List.Vector ℕ m → ℕ)
    (φf : ApproximableMap ? N) (hf : LamDef φf (f₀ : List.Vector ℕ nn →. ℕ))
    (φg : Fin nn → ApproximableMap ? N) (hg : ∀ i, LamDef (φg i) (g₀ i : List.Vector ℕ
    m →. ℕ)) :
    LamDef (strictGuardN m (φf.comp (tupleMap nn φg)))
      ((fun a => f₀ (List.Vector.ofFn fun i => g₀ i a) : List.Vector ℕ m → ℕ) :
        List.Vector ℕ m →. ℕ) := by
  refine lamDef_congr (fun v => ?_)
    (lamDef_comp (f₀ : _ →. ℕ) (fun i => (g₀ i : _ →. ℕ)) φf hf φg hg)
  simp only [PFun.coe_val, Vector.mOfFn_part_some]
  change (Part.some (List.Vector.ofFn fun i => g₀ i v)).bind (fun w => Part.some (f₀ w)
    )
      = Part.some (f₀ (List.Vector.ofFn fun i => g₀ i v))
  exact Part.bind_some _ _
end

section
section Rfind

variable (φf : ApproximableMap ? N)

theorem lamDef_rfind {n : ℕ} {f : List.Vector ℕ (n + 1) → ℕ}
    (hf : LamDef φf (f : List.Vector ℕ (n + 1) →. ℕ)) :
    LamDef (strictGuardN n (findMap φf))
      (fun v : List.Vector ℕ n => Nat.rfind (rfindZeroPred f v)) := by
  refine lamDef_of_inner (findMap φf) _ ?_ ?_
  · intro v c hc
    rw [findMap_vecElem]
    have hc' : c ∈ Nat.rfind (rfindZeroPred f v) := hc
    rw [Nat.mem_rfind] at hc'
    obtain ⟨hcs, hcm⟩ := hc'
    have h0 : f (c ::? v) = 0 := of_decide_eq_true (Part.mem_some_iff.mp hcs).symm
    have hmin : ∀ i, i < c → f (i ::? v) = 0 :=
      fun i hi => of_decide_eq_false (Part.mem_some_iff.mp (hcm hi)).symm
    exact searchMap_climb φf hf v c h0 hmin c 0 (by omega)
  · intro v hv
    rw [findMap_vecElem]
    have hdiv : ∀ k, f (k ::? v) = 0 := by
      intro k h0
      refine hv ?_
      have hdom : (Nat.rfind (rfindZeroPred f v)).Dom := by
        rw [Nat.rfind_dom]
        refine ⟨k, ?_, fun {m} _ => trivial⟩
        change true ∈ Part.some (decide (f (k ::? v) = 0))
        rw [Part.mem_some_iff]
        exact (decide_eq_true_iff.mpr h0).symm
      exact hdom
    exact searchMap_diverge φf hf v hdiv 0

end Rfind
end
```

```
section

theorem lamDef_total {n : ℕ} (ψ : ApproximableMap ? N) (g : List.Vector ℕ n → ℕ)
    (hval : ∀ v, ψ.toElementMap (vecElem v) = natElem (g v)) :
    LamDef (strictGuardN n ψ) (g : List.Vector ℕ n →. ℕ) :=
  lamDef_of_inner ψ _
    (fun v c hc => by rw [PFun.coe_val, Part.mem_some_iff] at hc; rw [hval, ← hc])
    (fun v hv => by rw [PFun.coe_val] at hv; exact absurd trivial hv)
end

section

theorem lamDef_get {n : ℕ} (i : Fin n) :
    LamDef (strictGuardN n (projN N i))
      ((fun v => v.get i : List.Vector ℕ n → ℕ) : List.Vector ℕ n →. ℕ) :=
  lamDef_total _ _ (fun v => by
    rw [toElementMap_projN, component_vecElem_lt v i.isLt, Fin.eta])
end

section

theorem lamDef_succ : LamDef (strictGuardN 1 (succMap.comp (projN N 0)))
    ((fun v => Nat.succ v.head : List.Vector ℕ 1 → ℕ) : List.Vector ℕ 1 →. ℕ) :=
  lamDef_total _ _ (fun v => by
    rw [toElementMap_comp, toElementMap_projN, component_vecElem_lt v (by norm_num),
      succMap_natElem]
    congr 1
    simp [List.Vector.get_zero])
end

section

theorem lamDef_zero : LamDef (strictGuardN 0 (constMap ? (natElem 0)))
    ((fun _ => 0 : List.Vector ℕ 0 → ℕ) : List.Vector ℕ 0 →. ℕ) :=
  lamDef_total (constMap ? (natElem 0)) _ (fun v => by rw [toElementMap_constMap])
end

section

theorem primrec_lamDef {n : ℕ} {f : List.Vector ℕ n → ℕ} (h : Nat.Primrec' f) :
    ∃ φ : ApproximableMap ? N, LamDef φ (f : List.Vector ℕ n →. ℕ) := by
  induction h with
  | zero => exact ⟨_, lamDef_zero⟩
  | succ => exact ⟨_, lamDef_succ⟩
  | get i => exact ⟨_, lamDef_get i⟩
  | comp g _ _ ihf ihg =>
      obtain ⟨φf, hφf⟩ := ihf
      choose φg hφg using ihg
      exact ⟨_, lamDef_primComp _ g φf hφf φg hφg⟩
  | prec _ _ ihf ihg =>
      obtain ⟨φf, hφf⟩ := ihf
      obtain ⟨φg, hφg⟩ := ihg
      exact ⟨_, lamDef_prec φf φg _ _ hφf hφg⟩
end

end DomainTheory.NeighbourhoodSystems.Theorem56Full
```

```
namespace DomainTheory.NeighbourhoodSystems.Theorem56Full
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap
open DomainTheory.NeighbourhoodSystems.Example43 (N natElem zeroElt succMap predMap
    zeroMap
  succMap_natElem succMap_bot predMap_natElem_succ predMap_natElem_zero predMap_bot
  zeroMap_natElem_zero zeroMap_natElem_succ zeroMap_bot constLiftN)
open DomainTheory.NeighbourhoodSystems.Exercise326 (cond)
open DomainTheory.NeighbourhoodSystems.Exercise511 (head tail push)
section

theorem partrec_lamDef {n : ℕ} {f : List.Vector ℕ n →. ℕ} (h : Nat.Partrec' f) :
    ∃ φ : ApproximableMap ? N, LamDef φ f := by
  induction h with
  | prim hp => exact primrec_lamDef hp
  | comp g _ _ ihf ihg =>
      obtain ⟨φf, hφf⟩ := ihf
      choose φg hφg using ihg
      exact ⟨_, lamDef_comp _ g φf hφf φg hφg⟩
  | rfind _ ih =>
      obtain ⟨φf, hφf⟩ := ih
      exact ⟨_, lamDef_rfind φf hφf⟩
end

section

theorem partrec_one {h : ℕ →. ℕ}
    (H : Nat.Partrec' (fun v : List.Vector ℕ 1 => h v.head)) :
    ∃ τ : ApproximableMap N N,
      (∀ a m, m ∈ h a → τ.toElementMap (natElem a) = natElem m) ∧
      (∀ a, ¬ (h a).Dom → τ.toElementMap (natElem a) = N.bot) ∧
      τ.toElementMap N.bot = N.bot := by
  obtain ⟨φ, hφ⟩ := partrec_lamDef H
  refine ⟨φ.comp oneArg, ?_, ?_, ?_⟩
  · intro a m hm
    rw [toElementMap_comp, oneArg_natElem]
    refine hφ.defined (a ::? List.Vector.nil) m ?_
    rwa [List.Vector.head_cons]
  · intro a hdom
    rw [toElementMap_comp, oneArg_natElem]
    refine hφ.undef (a ::? List.Vector.nil) ?_
    rwa [List.Vector.head_cons]
  · rw [toElementMap_comp, oneArg_bot]
    refine hφ.strict ?.bot (fun j => Or.inl (component_bot j)) 0 (by omega) (
    component_bot 0)
end

end DomainTheory.NeighbourhoodSystems.Theorem56Full
end
```

THEOREM 5.6. For every partial recursive function $h : \mathbf{N} \to \mathbf{N}$, there is a λ-term τ of type $(\mathbf{N} \to \mathbf{N})$ such that the only constants occurring in τ are

$$\text{cond},\ \text{succ},\ \text{pred},\ \text{zero},\ 0$$

and where if $h(n) = m$, then

$$\tau(n) = m$$

is true; and if $h(n)$ is undefined, then

$$\tau(n) = \perp$$

is true. The equation $\tau(\perp) = \perp$ is also true.

Proof : We have only formulated the theorem for functions of one variable — but to give the proof, it is convenient to pass through functions of any number of (integer) variables. We shall also have to recall the precise definition of the notion of partial recursive function.

It is also convenient to work with (*very*)*strict* functions

$$f : \mathbf{N}^k \to \mathbf{N}.$$

These are functions such that if $n_0, \ldots, n_{k-1} \in \mathbf{N}$ and $n_i = \perp$ for at least one $i < k$, then

$$f(n_0, \ldots, n_{k-1}) = \perp.$$

It is easy to check that compositions of strict functions are strict. It is also easy to see that any *partial* function

$$g : \mathbf{N}^k \to \mathbf{N}$$

extends to a strict (*approximable*) function

$$\bar{g} : \mathbf{N}^k \to \mathbf{N},$$

which takes the same values as g as long as g is defined; otherwise $\bar{g}$ takes the value $\perp$. What we want to show for *partial recursive* g is that the corresponding $\bar{g}$ is defined by a λ - expression.

In the first place we have to check that *primitive recursive* functions have λ - definitions in this sense. We recall that *primitive recursive* functions are generated from certain elementary *starting* functions by multi-variate composition and the scheme of primitive recrusion. The *starting* functions are the constant function with value zero and the "identity" or "projection" functions. For example, $g(n_0, n_1, n_2) = n_1$ for all $n_0, n_1, n_2 \in \mathbf{N}$ is one of the *starting* functions. Now we cannot just use the λ-term

$$\lambda x_0, x_1, x_2.x_1$$

to represent $\bar{g}$, because the function so defined is not strict. But any function in $\mathbf{N}^k \to \mathbf{N}$ can be cut down to a strict function by a simple device. Consider

$$\lambda x.\ \mathrm{cond}(\mathrm{zero}(x), x, x)$$

with x of type $\mathbf{N}$. This is the strict version of the identity function of one argument. The strict projection function of two arguments can be defined by

$$\lambda x_0, x_1.\ \mathrm{cond}(\mathrm{zero}(x_1), x_0, x_0).$$

The one of three arguments by:

$$\lambda x_0, x_1, x_2.\ \mathrm{cond}(\mathrm{zero}(x_0), \mathrm{cond}(\mathrm{zero}(x_2), x_1, x_1), \mathrm{cond}(\mathrm{zero}(x_2), x_1, x_1)).$$

This is not done very elegantly, and the reader can find for himself a general solution based on perhaps a better notation for the required compositions of functions.

As we remarked, strict functions are closed under substitution, and any substitution of a batch of functions into another function can be given by a λ-term, if the various functions can themselves be so defined. It only remains to λ-define functions obtained by primitive recursion. Thus, suppose, for the sake of argument, that

$$\bar{f} : \mathbf{N} \to \mathbf{N} \qquad \text{and} \qquad \bar{g} : \mathbf{N}^3 \to \mathbf{N}$$

are given as total functions with $\bar{f}$ and $\bar{g}$ being λ-definable. From them, we obtain by primitive recursion $\bar{h} : \mathbf{N}^2 \to \mathbf{N}$ where

$$\bar{h}(0, m) = \bar{f}(m),$$

$$\bar{h}(n+1, m) = \bar{g}(n, m, \bar{h}(n, m))$$

for all $n, m \in \mathbf{N}$. The λ-term defining $\bar{h}$ is

$$!k\ \lambda x, y.\ \mathrm{cond}(\mathrm{zero}(x), \bar{f}(y), \bar{g}(\mathrm{pred}(x), y, k(\mathrm{pred}(x), y))).$$

Here we have had to use the fixed-point operator on a variable k of type $(\mathbf{N}^2 \to \mathbf{N})$. The variables x, y are of type $\mathbf{N}$ and the cond-construction puts the two traditional equations into two clauses of one expression. It is easy to see that the fixed-point function *is* strict and is nothing more than $\bar{h}$.

That completes the representation of *primitive recursive* functions. To obtain the *partial recursive* functions, the idea is to use the so-called μ-scheme (least number operator) and, further, to close up under substitution. We need only treat the μ-scheme. Suppose, by way of example, $f(n, m)$ is given as a

primitive recursive function. We then define h (generally, a partial function) by

$$h(m) = \text{the least } n \text{ where } f(n, m) = 0.$$

This is often written

$$h(m) = \mu n.\ f(n, m) = 0.$$

Supposing, as we may, $\bar{f}$ is λ-definable, we introduce first

$$\bar{g} = !g\ \lambda x, y.\ \mathrm{cond}(\mathrm{zero}(\bar{f}(x, y)), x, g(\mathrm{succ}(x), y)).$$

Then $\bar{h} = \lambda y.\ \bar{g}(0, y)$. This is easily seen to be strict. Also easy to see is that if $h(m)$ is defined, then $\bar{g}(0, m) = h(m)$. But, if $h(m)$ is not defined, it takes some argument to make sure that the least fixed-point construction forces $\bar{g}(0, m) = \perp$. However, the argument is not very difficult. $\square$

What is *not* said in 5.6 is that every λ-term defines a partial recursive function. This is true (with suitable control over the constants and types in the expression), but the proof requires a full analysis of computability properties of domain constructions. This is the topic of Lecture VII.

It should be remarked that the types of variables needed for the proof of 5.6 never get very high. In fact, types like N, N^k, and $(N^k \to N)$ were the only ones needed (with perhaps T thrown in also).

Recursion on N was the topic of 5.6; further examples of recursion on other domains are included in the exercises.

3.6.8 Exercise 5.7 — currying the lambda notation

Find definitions of

$$\lambda x, y.\, \tau \quad \text{and} \quad \sigma(x, y)$$

which use only λv with one variable and applications only to one argument at a time. Note that use must be made of the combinators p_0, p_1, pair. Generalize the result to functions of many variables.

Exercise_5_7.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

section

namespace DomainTheory.NeighbourhoodSystems.Exercise507

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap

variable {α β ? ? : Type*}
  {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  {V₂ : NeighborhoodSystem ?} {V₃ : NeighborhoodSystem ?}

def curry₃ (g : ApproximableMap (prod (prod V₀ V₁) V₂) V₃) :
    ApproximableMap V₀ (funSpace V₁ (funSpace V₂ V₃)) :=
  curry (curry g)

end DomainTheory.NeighbourhoodSystems.Exercise507
end

section
namespace DomainTheory.NeighbourhoodSystems.Exercise507
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap

section
variable {α β ? ? : Type*}
  {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

theorem app_two_args (σ : ApproximableMap (prod V₀ V₁) V₂) (x : V₀.Element) (y : V₁.
    Element) :
    σ.toElementMap (pair x y) =
      (toApproxMap ((curry σ).toElementMap x)).toElementMap y := by
  rw [toElementMap_curry_apply]

theorem curry₃_apply (g : ApproximableMap (prod (prod V₀ V₁) V₂) V₃)
    (x : V₀.Element) (y : V₁.Element) (z : V₂.Element) :
    (toApproxMap ((toApproxMap ((curry₃ g).toElementMap x)).toElementMap y)).
    toElementMap z =
      g.toElementMap (pair (pair x y) z) := by
  rw [curry₃, toElementMap_curry_apply, toElementMap_curry_apply]
```

```
theorem lam_two_vars (g : ApproximableMap (prod V₀ V₁) V₂) (x : V₀.Element) (y : V₁.
    Element) :
    (toApproxMap ((curry g).toElementMap x)).toElementMap y = g.toElementMap (pair x y
    ) :=
  toElementMap_curry_apply g x y

theorem surjective_pairing (z : (prod V₀ V₁).Element) :
    pair ((proj₀ V₀ V₁).toElementMap z) ((proj₁ V₀ V₁).toElementMap z) = z := by
  rw [toElementMap_proj₀, toElementMap_proj₁, pair_fst_snd]

theorem uncurry_apply (h : ApproximableMap V₀ (funSpace V₁ V₂))
    (x : V₀.Element) (y : V₁.Element) :
    (uncurry h).toElementMap (pair x y) =
      (toApproxMap (h.toElementMap x)).toElementMap y := by
  rw [uncurry_eq, toElementMap_comp, toElementMap_paired, toElementMap_comp,
    toElementMap_proj₀, toElementMap_proj₁, fst_pair, snd_pair, evalMap_apply]

theorem uncurry_lam_two_vars (g : ApproximableMap (prod V₀ V₁) V₂) : uncurry (curry g)
    = g :=
  uncurry_curry g

end

end DomainTheory.NeighbourhoodSystems.Exercise507
end
```

3.6.9 Exercise 5.8 — combinatory completeness

(For combinator nuts.) Table 5.5 was meant to show how combinators could be defined in terms of λ-expressions. Can the tables be turned to show that with enough combinators available, every λ-expression can be defined by combining combinators, using $\sigma(\tau)$ as the *only* mode of combination?

Exercise_5_8.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise508
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap

section
variable {α β ? : Type*}
variable {αx αa αb : Type*}
  {Vx : NeighborhoodSystem αx} {Va : NeighborhoodSystem αa} {Vb : NeighborhoodSystem α
    b}

structure Dom where
```

```
  carrier : Type

  sys : NeighborhoodSystem carrier

abbrev Dom.arrow (A B : Dom) : Dom := ⟨ApproximableMap A.sys B.sys, funSpace A.sys B.
    sys⟩

inductive CL : Dom → Type 1 where
  | con {A : Dom} (c : A.sys.Element) : CL A
  | app {A B : Dom} (f : CL (A.arrow B)) (a : CL A) : CL B

def CL.denote : {A : Dom} → CL A → A.sys.Element
  | _, .con c => c
  | _, .app f a => (toApproxMap f.denote).toElementMap a.denote

inductive Poly (X : Dom) : Dom → Type 1 where
  | var : Poly X X
  | con {A : Dom} (c : A.sys.Element) : Poly X A
  | app {A B : Dom} (f : Poly X (A.arrow B)) (a : Poly X A) : Poly X B

def Poly.denote {X : Dom} : {A : Dom} → Poly X A → X.sys.Element → A.sys.Element
  | _, .var, x => x
  | _, .con c, _ => c
  | _, .app f a, x => (toApproxMap (f.denote x)).toElementMap (a.denote x)

def Ielem (X : Dom) : (X.arrow X).sys.Element := toFilter (idMap X.sys)

def Kelem (A X : Dom) : (A.arrow (X.arrow A)).sys.Element := toFilter (curry (proj₀ A.
    sys X.sys))

def Sbody (Vx : NeighborhoodSystem αx) (Va : NeighborhoodSystem αa) (Vb :
    NeighborhoodSystem αb) :
    ApproximableMap
      (prod (prod (funSpace Vx (funSpace Va Vb)) (funSpace Vx Va)) Vx) Vb :=
  (evalMap Va Vb).comp
    (paired
      ((evalMap Vx (funSpace Va Vb)).comp
        (paired
          ((proj₀ (funSpace Vx (funSpace Va Vb)) (funSpace Vx Va)).comp
            (proj₀ (prod (funSpace Vx (funSpace Va Vb)) (funSpace Vx Va)) Vx))
          (proj₁ (prod (funSpace Vx (funSpace Va Vb)) (funSpace Vx Va)) Vx)))
      ((evalMap Vx Va).comp
        (paired
          ((proj₁ (funSpace Vx (funSpace Va Vb)) (funSpace Vx Va)).comp
            (proj₀ (prod (funSpace Vx (funSpace Va Vb)) (funSpace Vx Va)) Vx))
          (proj₁ (prod (funSpace Vx (funSpace Va Vb)) (funSpace Vx Va)) Vx))))

def Smap (Vx : NeighborhoodSystem αx) (Va : NeighborhoodSystem αa) (Vb :
    NeighborhoodSystem αb) :
    ApproximableMap (funSpace Vx (funSpace Va Vb))
      (funSpace (funSpace Vx Va) (funSpace Vx Vb)) :=
  curry (curry (Sbody Vx Va Vb))

def Selem (X A B : Dom) :
    ((X.arrow (A.arrow B)).arrow ((X.arrow A).arrow (X.arrow B))).sys.Element :=
```

```
  toFilter (Smap X.sys A.sys B.sys)

def bracket {X : Dom} : {A : Dom} → Poly X A → CL (X.arrow A)
  | _, .var => .con (Ielem X)
  | _, .con c => .app (.con (Kelem _ X)) (.con c)
  | _, .app f a => .app (.app (.con (Selem X _ _)) (bracket f)) (bracket a)

theorem Smap_apply (F : (funSpace Vx (funSpace Va Vb)).Element) (G : (funSpace Vx Va).
    Element)
    (x : Vx.Element) :
    (toApproxMap ((toApproxMap ((Smap Vx Va Vb).toElementMap F)).toElementMap G)).
    toElementMap x
      = (toApproxMap ((toApproxMap F).toElementMap x)).toElementMap ((toApproxMap G).
    toElementMap x) := by
  rw [Smap, toElementMap_curry_apply, toElementMap_curry_apply]
  simp only [Sbody, toElementMap_comp, toElementMap_paired, toElementMap_proj₀,
    toElementMap_proj₁, fst_pair, snd_pair, evalMap_apply]
end

section
variable {α β ? : Type*}

theorem toApproxMap_toFilter {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
    (f : ApproximableMap V₀ V₁) : toApproxMap (toFilter f) = f := by
  have he := (funSpaceEquiv V₀ V₁).apply_symm_apply f
  rwa [funSpaceEquiv_apply, funSpaceEquiv_symm_apply] at he
end

section
variable {α β ? : Type*}
variable {αx αa αb : Type*}
  {Vx : NeighborhoodSystem αx} {Va : NeighborhoodSystem αa} {Vb : NeighborhoodSystem α
    b}

theorem Ielem_apply (X : Dom) (x : X.sys.Element) :
    (toApproxMap (Ielem X)).toElementMap x = x := by
  rw [Ielem, toApproxMap_toFilter, toElementMap_idMap]

theorem Kelem_apply (A X : Dom) (c : A.sys.Element) (x : X.sys.Element) :
    (toApproxMap ((toApproxMap (Kelem A X)).toElementMap c)).toElementMap x = c := by
  rw [Kelem, toApproxMap_toFilter]
  have h := toElementMap_curry_apply (proj₀ A.sys X.sys) c x
  rw [toElementMap_proj₀, fst_pair] at h
  exact h

theorem Selem_apply (X A B : Dom)
    (F : (X.arrow (A.arrow B)).sys.Element) (G : (X.arrow A).sys.Element) (x : X.sys.
    Element) :
    (toApproxMap ((toApproxMap ((toApproxMap (Selem X A B)).toElementMap F)).
    toElementMap G)).toElementMap x
      = (toApproxMap ((toApproxMap F).toElementMap x)).toElementMap ((toApproxMap G).
    toElementMap x) := by
  rw [Selem, toApproxMap_toFilter]
  exact Smap_apply F G x
end
end DomainTheory.NeighbourhoodSystems.Exercise508
```

```
section
namespace DomainTheory.NeighbourhoodSystems.Exercise508
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap
section
variable {α β ? : Type*}
variable {αx αa αb : Type*}
  {Vx : NeighborhoodSystem αx} {Va : NeighborhoodSystem αa} {Vb : NeighborhoodSystem α
    b}

theorem bracket_spec {X : Dom} {A : Dom} (t : Poly X A) (x : X.sys.Element) :
    (toApproxMap (bracket t).denote).toElementMap x = t.denote x := by
  induction t with
  | var =>
      simp only [bracket, CL.denote, Poly.denote]
      exact Ielem_apply X x
  | @con A c =>
      simp only [bracket, CL.denote, Poly.denote]
      exact Kelem_apply A X c x
  | @app A B f a ihf iha =>
      simp only [bracket, CL.denote, Poly.denote]
      have hS := Selem_apply X A B (CL.denote (bracket f)) (CL.denote (bracket a)) x
      rw [ihf, iha] at hS
      exact hS
end

end DomainTheory.NeighbourhoodSystems.Exercise508
end
```

3.6.10 Exercise 5.9 — common fixed points

Suppose that $f, g : \mathcal{D} \to \mathcal{D}$ are approximable and $f \circ g = g \circ f$. Show that f and g have a *least common fixed point* $x = f(x) = g(x)$. (Hint: Refer back to Exercise 4.20.) If in addition $f(\bot) = g(\bot)$, show that $\mathrm{fix}(f) = \mathrm{fix}(g)$. In particular, will $\mathrm{fix}(f) = \mathrm{fix}(f^2)$? What if we only assume $f \circ g = g^2 \circ f$?

Exercise_5_9.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_11

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

section
variable {α : Type*} {V : NeighborhoodSystem α}

theorem example_509 :
    (∀ {f g : ApproximableMap V V}, f.comp g = g.comp f →
      ∃ x : V.Element, f.toElementMap x = x ∧ g.toElementMap x = x ∧
        ∀ w : V.Element, f.toElementMap w = w → g.toElementMap w = w → x ≤ w) ∧
    (∀ {f g : ApproximableMap V V}, f.comp g = g.comp f →
```

```
      f.toElementMap V.bot = g.toElementMap V.bot →
        f.fixElement = g.fixElement) ∧
    (∀ f : ApproximableMap V V, f.fixElement = (f.comp f).fixElement) :=
  ⟨commuting_least_common_fixed, fixElement_eq_of_commuting_bot, fixElement_iterTwice⟩

end
end DomainTheory.NeighbourhoodSystems
```

3.6.11 Exercise 5.10 — smash product

Suppose $\mathcal{D}_0$ and $\mathcal{D}_1$ are neighbourhood systems over disjoint sets Δ_0 and Δ_1. Define the *smash product* $\mathcal{D}_0 \otimes \mathcal{D}_1$ with neighbourhoods

$$\{\Delta_0 \cup \Delta_1\} \cup \{X \cup Y \mid X \in \mathcal{D}_0 \setminus \{\Delta_0\} \text{ and } Y \in \mathcal{D}_1 \setminus \{\Delta_1\}\}.$$

Show that this *is* a neighbourhood system. Define $(\mathcal{D}_0 \to_\perp \mathcal{D}_1)$ so that $|\mathcal{D}_0 \to_\perp \mathcal{D}_1|$ consists exactly of the *strict functions*. By introducing appropriate combinators, show that

$$(\mathcal{D}_0 \to_\perp (\mathcal{D}_1 \to_\perp \mathcal{D}_2)) \quad \text{and} \quad ((\mathcal{D}_0 \otimes \mathcal{D}_1) \to_\perp \mathcal{D}_2)$$

are isomorphic.

Exercise_5_10.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_8

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Definition_3_8
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_5
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Lemma_3_6
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise510
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap

section
variable {α β ? : Type*}

def SmashProper (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) (W : Set (α ? β
    )) : Prop :=
  ∃ X Y, V₀.mem X ∧ X = V₀.master ∧ V₁.mem Y ∧ Y = V₁.master ∧ W = prodNbhd X Y
end

section
variable {α β ? : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
```

```
theorem inter_ne_master_left {X X' : Set α} (hX : V₀.mem X) (hXne : X = V₀.master) :
    X ∩ X' = V₀.master := by
  intro h
  apply hXne
  refine Set.Subset.antisymm (V₀.sub_master hX) ?_
  rw [← h]; exact Set.inter_subset_left

theorem inter_ne_master_right {Y Y' : Set β} (hY : V₁.mem Y) (hYne : Y = V₁.master) :
    Y ∩ Y' = V₁.master :=
  inter_ne_master_left (V₀ := V₁) hY hYne
end
end DomainTheory.NeighbourhoodSystems.Exercise510

section
namespace DomainTheory.NeighbourhoodSystems.Exercise510
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap
section
variable {α β ? : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

def smash (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) : NeighborhoodSystem
    (α ? β) where
  mem W := W = prodNbhd V₀.master V₁.master ∨ SmashProper V₀ V₁ W
  master := prodNbhd V₀.master V₁.master
  master_nonempty := by
    obtain ⟨a, ha⟩ := V₀.master_nonempty
    exact ⟨Sum.inl a, mem_prodNbhd_inl.mpr ha⟩
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' Z (rfl | ⟨X, Y, hX, hXne, hY, hYne, rfl⟩) hW' hZ hZsub
    ·
      rcases hW' with rfl | ⟨X', Y', hX', hX'ne, hY', hY'ne, rfl⟩
      · left; rw [Set.inter_self]
      · right
        refine ⟨X', Y', hX', hX'ne, hY', hY'ne, ?_⟩
        rw [prodNbhd_inter, Set.inter_eq_right.mpr (V₀.sub_master hX'),
          Set.inter_eq_right.mpr (V₁.sub_master hY')]
    ·
      rcases hW' with rfl | ⟨X', Y', hX', hX'ne, hY', hY'ne, rfl⟩
      · right
        refine ⟨X, Y, hX, hXne, hY, hYne, ?_⟩
        rw [prodNbhd_inter, Set.inter_eq_left.mpr (V₀.sub_master hX),
          Set.inter_eq_left.mpr (V₁.sub_master hY)]
      ·
        right
        rw [prodNbhd_inter] at hZsub ⊢
        rcases hZ with hZeq | ⟨U, V, hU, _, hV, _, rfl⟩
        ·
          exfalso
          rw [hZeq] at hZsub
          obtain ⟨hΔ₀, _⟩ := prodNbhd_subset_iff.mp hZsub
          exact hXne (Set.Subset.antisymm (V₀.sub_master hX) (hΔ₀.trans Set.
    inter_subset_left))
        · obtain ⟨hUsub, hVsub⟩ := prodNbhd_subset_iff.mp hZsub
          refine ⟨X ∩ X', Y ∩ Y', ?_, ?_, ?_, ?_, rfl⟩
          · exact V₀.inter_mem hX hX' hU hUsub
```

```
          · exact inter_ne_master_left hX hXne
          · exact V₁.inter_mem hY hY' hV hVsub
          · exact inter_ne_master_right hY hYne
  sub_master := by
    rintro W (rfl | ⟨X, Y, hX, _, hY, _, rfl⟩)
    · exact subset_rfl
    · exact prodNbhd_subset_iff.mpr ⟨V₀.sub_master hX, V₁.sub_master hY⟩

@[simp] theorem smash_master :
    (smash V₀ V₁).master = prodNbhd V₀.master V₁.master := rfl

@[simp] theorem smash_mem_bot {W : Set (α ? β)} :
    (smash V₀ V₁).bot.mem W ↔ W = prodNbhd V₀.master V₁.master := by
  rw [NeighborhoodSystem.mem_bot, smash_master]

theorem smash_mem_proper {X : Set α} {Y : Set β} (hX : V₀.mem X) (hXne : X = V₀.master)
    (hY : V₁.mem Y) (hYne : Y = V₁.master) : (smash V₀ V₁).mem (prodNbhd X Y) :=
  Or.inr ⟨X, Y, hX, hXne, hY, hYne, rfl⟩

def smashPair (x : V₀.Element) (y : V₁.Element) : (smash V₀ V₁).Element where
  mem W := W = prodNbhd V₀.master V₁.master ∨
    ∃ X Y, x.mem X ∧ X = V₀.master ∧ y.mem Y ∧ Y = V₁.master ∧ W = prodNbhd X Y
  sub := by
    rintro W (rfl | ⟨X, Y, hX, hXne, hY, hYne, rfl⟩)
    · exact (smash V₀ V₁).master_mem
    · exact smash_mem_proper (x.sub hX) hXne (y.sub hY) hYne
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨X, Y, hX, hXne, hY, hYne, rfl⟩) hW'
    · rcases hW' with rfl | ⟨X', Y', hX', hX'ne, hY', hY'ne, rfl⟩
      · left; rw [Set.inter_self]
      · right
        exact ⟨X', Y', hX', hX'ne, hY', hY'ne, by
          rw [prodNbhd_inter, Set.inter_eq_right.mpr (V₀.sub_master (x.sub hX')),
            Set.inter_eq_right.mpr (V₁.sub_master (y.sub hY'))]⟩
    · rcases hW' with rfl | ⟨X', Y', hX', hX'ne, hY', hY'ne, rfl⟩
      · right
        exact ⟨X, Y, hX, hXne, hY, hYne, by
          rw [prodNbhd_inter, Set.inter_eq_left.mpr (V₀.sub_master (x.sub hX)),
            Set.inter_eq_left.mpr (V₁.sub_master (y.sub hY))]⟩
      · right
        refine ⟨X ∩ X', Y ∩ Y', x.inter_mem hX hX', inter_ne_master_left (x.sub hX)
    hXne,
          y.inter_mem hY hY', inter_ne_master_right (y.sub hY) hYne, ?_⟩
        rw [prodNbhd_inter]
  up_mem := by
    rintro W W' (rfl | ⟨X, Y, hX, hXne, hY, hYne, rfl⟩) hW' hsub
    · left
      exact Set.Subset.antisymm ((smash V₀ V₁).sub_master hW') hsub
    · rcases hW' with rfl | ⟨X', Y', hX', hX'ne, hY', hY'ne, rfl⟩
      · left; rfl
      · obtain ⟨hXX', hYY'⟩ := prodNbhd_subset_iff.mp hsub
        right
        exact ⟨X', Y', x.up_mem hX hX' hXX', hX'ne, y.up_mem hY hY' hYY', hY'ne, rfl⟩

@[simp] theorem mem_smashPair {x : V₀.Element} {y : V₁.Element} {W : Set (α ? β)} :
```

```
    (smashPair x y).mem W ↔ W = prodNbhd V₀.master V₁.master ∨
      ∃ X Y, x.mem X ∧ X = V₀.master ∧ y.mem Y ∧ Y = V₁.master ∧ W = prodNbhd X Y :=
    Iff.rfl

def IsStrict (f : ApproximableMap V₀ V₁) : Prop :=
  ∀ {{Y}}, f.rel V₀.master Y → Y = V₁.master

abbrev StrictMap (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :=
  {f : ApproximableMap V₀ V₁ // IsStrict f}

theorem eq_bot_of_no_proper {x : V₀.Element} (hx : ∀ X, x.mem X → X = V₀.master) :
    x = V₀.bot :=
  le_antisymm (fun W hW => by rw [NeighborhoodSystem.mem_bot]; exact hx W hW)
    (V₀.bot_le x)

theorem exists_proper_of_ne_bot {x : V₀.Element} (hx : x = V₀.bot) :
    ∃ X, x.mem X ∧ X = V₀.master := by
  by_contra hc
  refine hx (le_antisymm (fun W hW => ?_) (V₀.bot_le x))
  rw [NeighborhoodSystem.mem_bot]
  by_contra hWne
  exact hc ⟨W, hW, hWne⟩

theorem isStrict_constBot : IsStrict (constMap V₀ (V₁.bot)) := by
  rintro Y ⟨_, hY⟩
  rwa [NeighborhoodSystem.mem_bot] at hY

theorem isStrict_iff_apply_bot {f : ApproximableMap V₀ V₁} :
    IsStrict f ↔ f.toElementMap V₀.bot = V₁.bot := by
  constructor
  · intro h
    apply Element.ext
    intro Y
    rw [NeighborhoodSystem.mem_bot]
    constructor
    · rintro ⟨X, hX, hrel⟩
      rw [NeighborhoodSystem.mem_bot] at hX; subst hX
      exact h hrel
    · rintro rfl
      exact ⟨V₀.master, V₀.bot.master_mem, f.master_rel⟩
  · intro h Y hrel
    have : (f.toElementMap V₀.bot).mem Y := ⟨V₀.master, V₀.bot.master_mem, hrel⟩
    rw [h, NeighborhoodSystem.mem_bot] at this
    exact this

theorem IsStrict.mono {f g : ApproximableMap V₀ V₁} (hf : IsStrict f) (hgf : g ≤ f) :
    IsStrict g :=
  fun _ hrel => hf (hgf _ _ hrel)

theorem principal_master_eq_bot {X : Set α} (hX : V₀.mem X) (hXm : X = V₀.master) :
    V₀.principal hX = V₀.bot := by
  subst hXm; rfl

theorem smashPair_bot_left (y : V₁.Element) : smashPair V₀.bot y = (smash V₀ V₁).bot :=
    by
  apply eq_bot_of_no_proper
```

```
  rintro W (rfl | ⟨X, Y, hxX, hXne, hyY, hYne, rfl⟩)
  · rfl
  · rw [NeighborhoodSystem.mem_bot] at hxX; exact absurd hxX hXne

theorem smashPair_bot_right (x : V₀.Element) : smashPair x V₁.bot = (smash V₀ V₁).bot
    := by
  apply eq_bot_of_no_proper
  rintro W (rfl | ⟨X, Y, hxX, hXne, hyY, hYne, rfl⟩)
  · rfl
  · rw [NeighborhoodSystem.mem_bot] at hyY; exact absurd hyY hYne

theorem smashPair_eq_bot_iff {x : V₀.Element} {y : V₁.Element} :
    smashPair x y = (smash V₀ V₁).bot ↔ x = V₀.bot ∨ y = V₁.bot := by
  constructor
  · intro h
    by_contra hcon
    obtain ⟨hx, hy⟩ := not_or.mp hcon
    obtain ⟨X, hxX, hXne⟩ := exists_proper_of_ne_bot hx
    obtain ⟨Y, hyY, hYne⟩ := exists_proper_of_ne_bot hy

    have hmem : (smashPair x y).mem (prodNbhd X Y) :=
      Or.inr ⟨X, Y, hxX, hXne, hyY, hYne, rfl⟩
    rw [h, smash_mem_bot] at hmem
    obtain ⟨hX, _⟩ := prodNbhd_injective hmem
    exact hXne hX
  · intro h
    apply eq_bot_of_no_proper
    rintro W (rfl | ⟨X, Y, hxX, hXne, hyY, hYne, rfl⟩)
    · rfl
    · exfalso
      rcases h with hx | hy
      · rw [hx, NeighborhoodSystem.mem_bot] at hxX; exact hXne hxX
      · rw [hy, NeighborhoodSystem.mem_bot] at hyY; exact hYne hyY

theorem smashPair_mono {x x' : V₀.Element} {y y' : V₁.Element} (hx : x ≤ x') (hy : y ≤
    y') :
    smashPair x y ≤ smashPair x' y' := by
  rintro W (rfl | ⟨X, Y, hxX, hXne, hyY, hYne, rfl⟩)
  · exact Or.inl rfl
  · exact Or.inr ⟨X, Y, hx X hxX, hXne, hy Y hyY, hYne, rfl⟩

def sstep (X : Set α) (Y : Set β) : Set (StrictMap V₀ V₁) := {f | f.1.rel X Y}

@[simp] theorem mem_sstep {X : Set α} {Y : Set β} {f : StrictMap V₀ V₁} :
    f ∈ sstep X Y ↔ f.1.rel X Y := Iff.rfl

def sstepFun (L : List (Set α × Set β)) : Set (StrictMap V₀ V₁) :=
  {f | ∀ p ∈ L, f.1.rel p.1 p.2}

@[simp] theorem mem_sstepFun {L : List (Set α × Set β)} {f : StrictMap V₀ V₁} :
    f ∈ sstepFun L ↔ ∀ p ∈ L, f.1.rel p.1 p.2 := Iff.rfl

@[simp] theorem sstepFun_nil : (sstepFun [] : Set (StrictMap V₀ V₁)) = Set.univ := by
  ext f; simp

theorem sstepFun_append (L L' : List (Set α × Set β)) :
```

```
    (sstepFun (L ++ L') : Set (StrictMap V₀ V₁)) = sstepFun L ∩ sstepFun L' := by
  ext f
  simp only [mem_sstepFun, List.mem_append, Set.mem_inter_iff]
  constructor
  · intro h; exact ⟨fun p hp => h p (Or.inl hp), fun p hp => h p (Or.inr hp)⟩
  · rintro ⟨hL, hL'⟩ p (hp | hp)
    · exact hL p hp
    · exact hL' p hp

theorem sstepFun_cons (p : Set α × Set β) (L : List (Set α × Set β)) :
    (sstepFun (p :: L) : Set (StrictMap V₀ V₁)) = sstep p.1 p.2 ∩ sstepFun L := by
  ext f
  simp only [mem_sstepFun, List.mem_cons, Set.mem_inter_iff, mem_sstep]
  constructor
  · intro h; exact ⟨h p (Or.inl rfl), fun q hq => h q (Or.inr hq)⟩
  · rintro ⟨hp, hrest⟩ q (rfl | hq)
    · exact hp
    · exact hrest q hq

theorem sstepFun_singleton (X : Set α) (Y : Set β) :
    (sstepFun [(X, Y)] : Set (StrictMap V₀ V₁)) = sstep X Y := by
  rw [sstepFun_cons, sstepFun_nil, Set.inter_univ]

@[simp] theorem sstep_master_eq :
    (sstep V₀.master V₁.master : Set (StrictMap V₀ V₁)) = Set.univ := by
  ext f; simpa using f.1.master_rel

theorem sstep_inter_right {X : Set α} {Y Y' : Set β} (hY : V₁.mem Y) (hY' : V₁.mem Y')
    :
    (sstep X Y ∩ sstep X Y' : Set (StrictMap V₀ V₁)) = sstep X (Y ∩ Y') := by
  ext f
  simp only [Set.mem_inter_iff, mem_sstep]
  constructor
  · rintro ⟨h, h'⟩; exact f.1.inter_right h h'
  · intro h
    exact ⟨f.1.mono h subset_rfl Set.inter_subset_left (f.1.rel_dom h) hY,
           f.1.mono h subset_rfl Set.inter_subset_right (f.1.rel_dom h) hY'⟩

theorem sstep_subset {X X' : Set α} {Y Y' : Set β} (hX' : V₀.mem X') (hY' : V₁.mem Y')
    (hX'X : X' ⊆ X) (hYY' : Y ⊆ Y') : (sstep X Y : Set (StrictMap V₀ V₁)) ⊆ sstep X' Y
    ' := by
  intro f hf
  exact f.1.mono hf hX'X hYY' hX' hY'

def strictFun (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    NeighborhoodSystem (StrictMap V₀ V₁) where
  mem W := (∃ L : List (Set α × Set β), (∀ p ∈ L, V₀.mem p.1 ∧ V₁.mem p.2) ∧ W =
    sstepFun L)
    ∧ W.Nonempty
  master := Set.univ
  master_nonempty := ⟨⟨constMap V₀ V₁.bot, isStrict_constBot⟩, Set.mem_univ _⟩
  master_mem := ⟨⟨[], by simp, sstepFun_nil.symm⟩,
    ⟨⟨constMap V₀ V₁.bot, isStrict_constBot⟩, Set.mem_univ _⟩⟩
  inter_mem := by
    rintro W W' Z ⟨⟨L, hL, rfl⟩, _⟩ ⟨⟨L', hL', rfl⟩, _⟩ ⟨_, hZne⟩ hZsub
    refine ⟨⟨L ++ L', ?_, (sstepFun_append _ _).symm⟩, hZne.mono hZsub⟩
```

```
    intro p hp
    rcases List.mem_append.mp hp with h | h
    · exact hL p h
    · exact hL' p h
  sub_master := fun _ => Set.subset_univ _

@[simp] theorem strictFun_master : (strictFun V₀ V₁).master = Set.univ := rfl

theorem sstepFun_up_closed {L : List (Set α × Set β)} {f f' : StrictMap V₀ V₁}
    (hf : f ∈ sstepFun L) (hff' : f ≤ f') : f' ∈ sstepFun L := by
  intro p hp
  exact hff' p.1 p.2 (hf p hp)

theorem sstep_mem_of_mem {g : StrictMap V₀ V₁} {X : Set α} {Y : Set β} (h : g.1.rel X Y
    ) :
    (strictFun V₀ V₁).mem (sstep X Y) := by
  refine ⟨⟨[(X, Y)], ?_, (sstepFun_singleton X Y).symm⟩, ⟨g, h⟩⟩
  intro p hp; rw [List.mem_singleton] at hp; subst hp
  exact ⟨g.1.rel_dom h, g.1.rel_cod h⟩

theorem mem_sstepFun_iff (φ : (strictFun V₀ V₁).Element) {L : List (Set α × Set β)}
    (hL : ∀ p ∈ L, V₀.mem p.1 ∧ V₁.mem p.2) :
    φ.mem (sstepFun L) ↔ ∀ p ∈ L, φ.mem (sstep p.1 p.2) := by
  induction L with
  | nil => simp only [sstepFun_nil, List.not_mem_nil, IsEmpty.forall_iff, implies_true
    , iff_true]
           exact φ.master_mem
  | cons p L ih =>
    rw [sstepFun_cons]
    have hLtail : ∀ q ∈ L, V₀.mem q.1 ∧ V₁.mem q.2 :=
      fun q hq => hL q (List.mem_cons.mpr (Or.inr hq))
    constructor
    · intro hmem
      obtain ⟨g, hg⟩ := (φ.sub hmem).2
      have hstep : φ.mem (sstep p.1 p.2) :=
        φ.up_mem hmem (sstep_mem_of_mem (g := g) (hg.1)) Set.inter_subset_left
      have hne : (sstep p.1 p.2 ∩ sstepFun L).Nonempty := (φ.sub hmem).2
      have htail : φ.mem (sstepFun L) :=
        φ.up_mem hmem ⟨⟨L, hLtail, rfl⟩, hne.mono Set.inter_subset_right⟩ Set.
    inter_subset_right
      intro q hq
      rcases List.mem_cons.mp hq with rfl | hq
      · exact hstep
      · exact (ih hLtail).mp htail q hq
    · intro hall
      have hstep : φ.mem (sstep p.1 p.2) := hall p (List.mem_cons.mpr (Or.inl rfl))
      have htail : φ.mem (sstepFun L) :=
        (ih hLtail).mpr (fun q hq => hall q (List.mem_cons.mpr (Or.inr hq)))
      exact φ.inter_mem hstep htail

theorem strictFun_mem_iff {W : Set (StrictMap V₀ V₁)} :
    (strictFun V₀ V₁).mem W ↔
      (∃ L : List (Set α × Set β), (∀ p ∈ L, V₀.mem p.1 ∧ V₁.mem p.2) ∧ W = sstepFun L
    )
      ∧ W.Nonempty := Iff.rfl
```

```
theorem strictFun_mem_inter {W W' : Set (StrictMap V₀ V₁)}
    (hW : (strictFun V₀ V₁).mem W) (hW' : (strictFun V₀ V₁).mem W') (hne : (W ∩ W').
   Nonempty) :
    (strictFun V₀ V₁).mem (W ∩ W') := by
  obtain ⟨⟨L, hL, rfl⟩, _⟩ := hW
  obtain ⟨⟨L', hL', rfl⟩, _⟩ := hW'
  refine ⟨⟨L ++ L', ?_, (sstepFun_append _ _).symm⟩, hne⟩
  intro p hp
  rcases List.mem_append.mp hp with h | h
  · exact hL p h
  · exact hL' p h

theorem strictFun_mem_up_closed {W : Set (StrictMap V₀ V₁)} (hW : (strictFun V₀ V₁).mem
    W)
    {f f' : StrictMap V₀ V₁} (hf : f ∈ W) (hff' : f ≤ f') : f' ∈ W := by
  obtain ⟨⟨L, _, rfl⟩, _⟩ := hW
  exact sstepFun_up_closed hf hff'

def toStrictMap (φ : (strictFun V₀ V₁).Element) : StrictMap V₀ V₁ :=
  ⟨{ rel := fun X Y => φ.mem (sstep X Y)
     rel_dom := by intro X Y h; obtain ⟨f, hf⟩ := (φ.sub h).2; exact f.1.rel_dom hf
     rel_cod := by intro X Y h; obtain ⟨f, hf⟩ := (φ.sub h).2; exact f.1.rel_cod hf
     master_rel := by
       show φ.mem (sstep V₀.master V₁.master); rw [sstep_master_eq]; exact φ.master_mem
     inter_right := by
       intro X Y Y' h h'
       obtain ⟨f, hf⟩ := (φ.sub h).2
       obtain ⟨f', hf'⟩ := (φ.sub h').2
       have hY : V₁.mem Y := f.1.rel_cod hf
       have hY' : V₁.mem Y' := f'.1.rel_cod hf'
       show φ.mem (sstep X (Y ∩ Y'))
       rw [← sstep_inter_right hY hY']
       exact φ.inter_mem h h'
     mono := by
       intro X X' Y Y' h hX'X hYY' hX' hY'
       obtain ⟨g, hg⟩ := (φ.sub h).2
       have hg' : g.1.rel X' Y' := g.1.mono hg hX'X hYY' hX' hY'
       show φ.mem (sstep X' Y')
       exact φ.up_mem h (sstep_mem_of_mem (g := g) hg') (sstep_subset hX' hY' hX'X hYY
   ') },
   by
     intro Y h
     obtain ⟨g, hg⟩ := (φ.sub h).2
     exact g.2 hg⟩

@[simp] theorem toStrictMap_rel {φ : (strictFun V₀ V₁).Element} {X : Set α} {Y : Set β}
    :
    (toStrictMap φ).1.rel X Y ↔ φ.mem (sstep X Y) := Iff.rfl

def toStrictFilter (f : StrictMap V₀ V₁) : (strictFun V₀ V₁).Element where
  mem W := (strictFun V₀ V₁).mem W ∧ f ∈ W
  sub h := h.1
  master_mem := ⟨(strictFun V₀ V₁).master_mem, Set.mem_univ f⟩
  inter_mem := by
    rintro W W' ⟨hW, hfW⟩ ⟨hW', hfW'⟩
    exact ⟨strictFun_mem_inter hW hW' ⟨f, Set.mem_inter hfW hfW'⟩, Set.mem_inter hfW
```

```
    hfW'⟩

  up_mem := by rintro W W' ⟨hW, hfW⟩ hW' hWW'; exact ⟨hW', hWW' hfW⟩

@[simp] theorem mem_toStrictFilter {f : StrictMap V₀ V₁} {W : Set (StrictMap V₀ V₁)} :
    (toStrictFilter f).mem W ↔ (strictFun V₀ V₁).mem W ∧ f ∈ W := Iff.rfl

end

section
variable {α β ? : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
variable {V₂ : NeighborhoodSystem ?}

theorem rel_sstepFun_iff (h : ApproximableMap V₀ (strictFun V₁ V₂)) {X : Set α} (hX : V
    ₀.mem X)
    {L : List (Set β × Set ?)} (hL : ∀ p ∈ L, V₁.mem p.1 ∧ V₂.mem p.2) :
    h.rel X (sstepFun L) ↔ ∀ p ∈ L, h.rel X (sstep p.1 p.2) := by
  induction L with
  | nil =>
    simp only [sstepFun_nil, List.not_mem_nil, IsEmpty.forall_iff, implies_true,
    iff_true]
    show h.rel X (strictFun V₁ V₂).master
    exact h.rel_master hX
  | cons p L ih =>
    rw [sstepFun_cons]
    have hp := hL p (List.mem_cons.mpr (Or.inl rfl))
    have hLtail : ∀ q ∈ L, V₁.mem q.1 ∧ V₂.mem q.2 :=
      fun q hq => hL q (List.mem_cons.mpr (Or.inr hq))
    constructor
    · intro hmem
      obtain ⟨f, hf⟩ := (strictFun_mem_iff.mp (h.rel_cod hmem)).2
      have hstep : h.rel X (sstep p.1 p.2) :=
        h.mono hmem subset_rfl Set.inter_subset_left hX (sstep_mem_of_mem (g := f) (hf
    .1))
      have hne : (sstep p.1 p.2 ∩ sstepFun L).Nonempty := (h.rel_cod hmem).2
      have htail : h.rel X (sstepFun L) :=
        h.mono hmem subset_rfl Set.inter_subset_right hX
          ⟨⟨L, hLtail, rfl⟩, hne.mono Set.inter_subset_right⟩
      intro q hq
      rcases List.mem_cons.mp hq with rfl | hq
      · exact hstep
      · exact (ih hLtail).mp htail q hq
    · intro hall
      have hstep : h.rel X (sstep p.1 p.2) := hall p (List.mem_cons.mpr (Or.inl rfl))
      have htail : h.rel X (sstepFun L) :=
        (ih hLtail).mpr (fun q hq => hall q (List.mem_cons.mpr (Or.inr hq)))
      exact h.inter_right hstep htail

theorem smashPair_principal_apply (g : ApproximableMap (smash V₀ V₁) V₂)
    {X : Set α} {Y : Set β} (hX : V₀.mem X) (hXne : X = V₀.master)
    (hY : V₁.mem Y) (hYne : Y = V₁.master) {Z : Set ?} :
    (g.toElementMap (smashPair (V₀.principal hX) (V₁.principal hY))).mem Z
      ↔ g.rel (prodNbhd X Y) Z := by
  constructor
  · rintro ⟨W, hW, hrel⟩
```

```
    rcases hW with rfl | ⟨A, B, ⟨_, hXA⟩, _, ⟨_, hYB⟩, _, rfl⟩
    · exact g.mono hrel (prodNbhd_subset_iff.mpr ⟨V₀.sub_master hX, V₁.sub_master hY⟩)
    subset_rfl
        (smash_mem_proper hX hXne hY hYne) (g.rel_cod hrel)
    · exact g.mono hrel (prodNbhd_subset_iff.mpr ⟨hXA, hYB⟩) subset_rfl
        (smash_mem_proper hX hXne hY hYne) (g.rel_cod hrel)
  · intro hrel
    exact ⟨prodNbhd X Y, Or.inr ⟨X, Y, ⟨hX, subset_rfl⟩, hXne, ⟨hY, subset_rfl⟩, hYne,
    rfl⟩, hrel⟩

def smashSection (g : ApproximableMap (smash V₀ V₁) V₂) {X : Set α} (hX : V₀.mem X) :
    ApproximableMap V₁ V₂ :=
  ofMono (fun Y hY => g.toElementMap (smashPair (V₀.principal hX) (V₁.principal hY)))
    (by
      intro Y Y' hY hY' hY'Y
      exact toElementMap_mono g (smashPair_mono le_rfl ((V₁.principal_le_iff hY hY').
    mpr hY'Y)))

theorem isStrict_smashSection {g : ApproximableMap (smash V₀ V₁) V₂} (hg : IsStrict g)
    {X : Set α} (hX : V₀.mem X) : IsStrict (smashSection g hX) := by
  rw [isStrict_iff_apply_bot, smashSection,
    show (V₁.bot) = V₁.principal V₁.master_mem from rfl, toElementMap_ofMono_principal,
    show smashPair (V₀.principal hX) (V₁.principal V₁.master_mem) = (smash V₀ V₁).bot
    from
      smashPair_bot_right _]
  exact isStrict_iff_apply_bot.mp hg

theorem smashSection_mono {g : ApproximableMap (smash V₀ V₁) V₂} {X X' : Set α}
    (hX : V₀.mem X) (hX' : V₀.mem X') (hX'X : X' ⊆ X) :
    smashSection g hX ≤ smashSection g hX' := by
  intro Y Z hrel
  obtain ⟨hY, hmem⟩ := hrel
  exact ⟨hY, toElementMap_mono g
    (smashPair_mono ((V₀.principal_le_iff hX hX').mpr hX'X) le_rfl) Z hmem⟩

theorem smashSection_rel {g : ApproximableMap (smash V₀ V₁) V₂} {X : Set α} (hX : V₀.
    mem X)
    {Y : Set β} {Z : Set ?} :
    (smashSection g hX).rel Y Z ↔
      ∃ hY : V₁.mem Y, (g.toElementMap (smashPair (V₀.principal hX) (V₁.principal hY)))
    .mem Z :=
  Iff.rfl

def smashCurryMap (g : StrictMap (smash V₀ V₁) V₂) : StrictMap V₀ (strictFun V₁ V₂) :=
  ⟨{ rel := fun X N => ∃ hX : V₀.mem X, (strictFun V₁ V₂).mem N ∧
       (⟨smashSection g.1 hX, isStrict_smashSection g.2 hX⟩ : StrictMap V₁ V₂) ∈ N
     rel_dom := fun ⟨hX, _⟩ => hX
     rel_cod := fun ⟨_, hN, _⟩ => hN
     master_rel := ⟨V₀.master_mem, (strictFun V₁ V₂).master_mem, Set.mem_univ _⟩
     inter_right := by
       rintro X N N' ⟨hX, hN, hmem⟩ ⟨_, hN', hmem'⟩
       exact ⟨hX, strictFun_mem_inter hN hN' ⟨_, hmem, hmem'⟩, Set.mem_inter hmem hmem'⟩
     mono := by
       rintro X X' N N' ⟨hX, hN, hmem⟩ hX'X hNN' hX' hN'
       refine ⟨hX', hN', strictFun_mem_up_closed hN' (hNN' hmem) ?_⟩
       exact Subtype.coe_le_coe.mp (smashSection_mono hX hX' hX'X) },
```

```
  by
    rintro N ⟨hΔ₀, hN, hmem⟩
    obtain ⟨⟨L, hL, rfl⟩, _⟩ := hN
    have hall : ∀ p ∈ L, p.2 = V₂.master := by
      intro p hp
      have hpr : (smashSection g.1 hΔ₀).rel p.1 p.2 := hmem p hp
      rw [smashSection_rel] at hpr
      obtain ⟨hp1, hpmem⟩ := hpr
      have hbot : smashPair (V₀.principal hΔ₀) (V₁.principal hp1) = (smash V₀ V₁).bot
    := by
        rw [principal_master_eq_bot hΔ₀ rfl]; exact smashPair_bot_left _
      rw [hbot, isStrict_iff_apply_bot.mp g.2, NeighborhoodSystem.mem_bot] at hpmem
      exact hpmem
    apply Set.eq_univ_of_forall
    intro f q hq
    rw [hall q hq]
    exact (f.1).rel_master (hL q hq).1⟩

theorem smash_mem_prodNbhd_form {W : Set (α ? β)} (hW : (smash V₀ V₁).mem W) :
    ∃ A B, V₀.mem A ∧ V₁.mem B ∧ W = prodNbhd A B := by
  rcases hW with rfl | ⟨X, Y, hX, _, hY, _, rfl⟩
  · exact ⟨_, _, V₀.master_mem, V₁.master_mem, rfl⟩
  · exact ⟨X, Y, hX, hY, rfl⟩

def smashUncurryMap (h : StrictMap V₀ (strictFun V₁ V₂)) : StrictMap (smash V₀ V₁) V₂ :=
  ⟨{ rel := fun W Z => (smash V₀ V₁).mem W ∧ h.1.rel (Sum.inl ^-1' W) (sstep (Sum.inr
    ^-1' W) Z)
     rel_dom := fun hh => hh.1
     rel_cod := by
       rintro W Z ⟨_, hrel⟩
       obtain ⟨f, hf⟩ := (strictFun_mem_iff.mp (h.1.rel_cod hrel)).2
       exact f.1.rel_cod hf
     master_rel := by
       refine ⟨(smash V₀ V₁).master_mem, ?_⟩
       rw [show (smash V₀ V₁).master = prodNbhd V₀.master V₁.master from rfl,
         inl_preimage_prodNbhd, inr_preimage_prodNbhd, sstep_master_eq]
       exact h.1.master_rel
     inter_right := by
       rintro W Z Z' ⟨hW, hrel⟩ ⟨_, hrel'⟩
       obtain ⟨f, hf⟩ := (strictFun_mem_iff.mp (h.1.rel_cod hrel)).2
       obtain ⟨f', hf'⟩ := (strictFun_mem_iff.mp (h.1.rel_cod hrel')).2
       refine ⟨hW, ?_⟩
       rw [← sstep_inter_right (f.1.rel_cod hf) (f'.1.rel_cod hf')]
       exact h.1.inter_right hrel hrel'
     mono := by
       rintro W W₂ Z Z' ⟨_, hrel⟩ hW₂W hZZ' hW₂ hZ'
       have hinl : Sum.inl ^-1' W₂ ⊆ Sum.inl ^-1' W := Set.preimage_mono hW₂W
       have hinr : Sum.inr ^-1' W₂ ⊆ Sum.inr ^-1' W := Set.preimage_mono hW₂W
       obtain ⟨A, B, hA, hB, rfl⟩ := smash_mem_prodNbhd_form hW₂
       refine ⟨hW₂, ?_⟩
       rw [inl_preimage_prodNbhd] at hinl
       rw [inr_preimage_prodNbhd] at hinr
       rw [inl_preimage_prodNbhd, inr_preimage_prodNbhd]
       obtain ⟨f, hf⟩ := (strictFun_mem_iff.mp (h.1.rel_cod hrel)).2
       have hfB : f.1.rel B Z' := f.1.mono hf hinr hZZ' hB hZ'
       exact h.1.mono hrel hinl (sstep_subset hB hZ' hinr hZZ') hA
```

```
          (sstep_mem_of_mem (g := f) hfB) },
   by
     rintro Z ⟨_, hrel⟩
     rw [show (smash V₀ V₁).master = prodNbhd V₀.master V₁.master from rfl,
       inl_preimage_prodNbhd, inr_preimage_prodNbhd] at hrel
     have huniv : sstep V₁.master Z = (Set.univ : Set (StrictMap V₁ V₂)) := h.2 hrel
     have hcb : (⟨constMap V₁ V₂.bot, isStrict_constBot⟩ : StrictMap V₁ V₂) ∈ sstep V₁.
    master Z := by
       rw [huniv]; exact Set.mem_univ _
     obtain ⟨_, hZ⟩ := hcb
     rwa [NeighborhoodSystem.mem_bot] at hZ⟩

theorem smashUncurry_curry (g : StrictMap (smash V₀ V₁) V₂) :
    smashUncurryMap (smashCurryMap g) = g := by
  apply Subtype.ext
  apply ApproximableMap.ext
  intro W Z
  constructor
  · rintro ⟨hW, hcurry⟩
    rcases hW with rfl | ⟨X, Y, hXp, hXne, hYp, hYne, rfl⟩
    · simp only [inl_preimage_prodNbhd, inr_preimage_prodNbhd] at hcurry
      obtain ⟨hXm, _, hsec⟩ := hcurry
      have hZ : Z = V₂.master := isStrict_smashSection g.2 hXm hsec
      rw [hZ]; exact g.1.master_rel
    · simp only [inl_preimage_prodNbhd, inr_preimage_prodNbhd] at hcurry
      obtain ⟨hX, _, hY, hmem⟩ := hcurry
      exact (smashPair_principal_apply g.1 hXp hXne hYp hYne).mp hmem
  · intro hrel
    have hW : (smash V₀ V₁).mem W := g.1.rel_dom hrel
    rcases hW with rfl | ⟨X, Y, hXp, hXne, hYp, hYne, rfl⟩
    · have hZ : Z = V₂.master := g.2 hrel
      subst hZ
      refine ⟨Or.inl rfl, ?_⟩
      simp only [inl_preimage_prodNbhd, inr_preimage_prodNbhd, sstep_master_eq]
      exact ⟨V₀.master_mem, (strictFun V₁ V₂).master_mem, Set.mem_univ _⟩
    · refine ⟨smash_mem_proper hXp hXne hYp hYne, ?_⟩
      simp only [inl_preimage_prodNbhd, inr_preimage_prodNbhd]
      have hsec : (smashSection g.1 hXp).rel Y Z :=
        ⟨hYp, (smashPair_principal_apply g.1 hXp hXne hYp hYne).mpr hrel⟩
      exact ⟨hXp, sstep_mem_of_mem
        (g := ⟨smashSection g.1 hXp, isStrict_smashSection g.2 hXp⟩) hsec, hsec⟩

theorem sstep_cod_master {Y : Set α} (hY : V₀.mem Y) :
    (sstep Y V₁.master : Set (StrictMap V₀ V₁)) = Set.univ := by
  ext f
  simp only [mem_sstep, Set.mem_univ, iff_true]
  exact f.1.mono f.1.master_rel (V₀.sub_master hY) subset_rfl hY V₁.master_mem

theorem section_uncurry_rel (h : StrictMap V₀ (strictFun V₁ V₂))
    {X : Set α} (hX : V₀.mem X) {Y : Set β} (hY : V₁.mem Y) {Z : Set ?} :
    (smashSection (smashUncurryMap h).1 hX).rel Y Z ↔ h.1.rel X (sstep Y Z) := by
  rw [smashSection_rel]
  by_cases hXm : X = V₀.master
  · subst hXm
    constructor
    · rintro ⟨hY', hmem⟩
```

```
      rw [principal_master_eq_bot hX rfl,
        show smashPair V₀.bot (V₁.principal hY') = (smash V₀ V₁).bot from
          smashPair_eq_bot_iff.mpr (Or.inl rfl),
        isStrict_iff_apply_bot.mp (smashUncurryMap h).2, NeighborhoodSystem.mem_bot]
    at hmem
      subst hmem
      rw [sstep_cod_master hY]
      exact h.1.rel_master hX
    · intro hrel
      have huniv : sstep Y Z = (Set.univ : Set (StrictMap V₁ V₂)) := h.2 hrel
      have hZ : Z = V₂.master := by
        have hcb : (⟨constMap V₁ V₂.bot, isStrict_constBot⟩ : StrictMap V₁ V₂) ∈ sstep Y
     Z := by
          rw [huniv]; exact Set.mem_univ _
        obtain ⟨_, hbz⟩ := hcb
        rwa [NeighborhoodSystem.mem_bot] at hbz
      subst hZ
      exact ⟨hY, ((smashUncurryMap h).1.toElementMap _).master_mem⟩
  · by_cases hYm : Y = V₁.master
    · subst hYm
      constructor
      · rintro ⟨hY', hmem⟩
        rw [principal_master_eq_bot hY' rfl,
          show smashPair (V₀.principal hX) V₁.bot = (smash V₀ V₁).bot from
            smashPair_eq_bot_iff.mpr (Or.inr rfl),
          isStrict_iff_apply_bot.mp (smashUncurryMap h).2, NeighborhoodSystem.mem_bot]
      at hmem
        subst hmem
        rw [sstep_master_eq]
        exact h.1.rel_master hX
      · intro hrel
        obtain ⟨f, hf⟩ := (strictFun_mem_iff.mp (h.1.rel_cod hrel)).2
        have hZ : Z = V₂.master := f.2 hf
        subst hZ
        exact ⟨hY, ((smashUncurryMap h).1.toElementMap _).master_mem⟩
    · constructor
      · rintro ⟨hY', hmem⟩
        obtain ⟨_, hrel⟩ :=
          (smashPair_principal_apply (smashUncurryMap h).1 hX hXm hY hYm).mp hmem
        simpa only [inl_preimage_prodNbhd, inr_preimage_prodNbhd] using hrel
      · intro hrel
        refine ⟨hY, (smashPair_principal_apply (smashUncurryMap h).1 hX hXm hY hYm).mpr
     ?_⟩
        refine ⟨smash_mem_proper hX hXm hY hYm, ?_⟩
        simpa only [inl_preimage_prodNbhd, inr_preimage_prodNbhd] using hrel

theorem smashCurry_uncurry (h : StrictMap V₀ (strictFun V₁ V₂)) :
    smashCurryMap (smashUncurryMap h) = h := by
  apply Subtype.ext
  apply ApproximableMap.ext
  intro X N
  constructor
  · rintro ⟨hX, hN, hmem⟩
    obtain ⟨⟨L, hL, rfl⟩, _⟩ := hN
    refine (rel_sstepFun_iff h.1 hX hL).mpr (fun p hp => ?_)
    exact (section_uncurry_rel h hX (hL p hp).1).mp (hmem p hp)
```

```
  · intro hrel
    have hX : V₀.mem X := h.1.rel_dom hrel
    have hN : (strictFun V₁ V₂).mem N := h.1.rel_cod hrel
    refine ⟨hX, hN, ?_⟩
    obtain ⟨⟨L, hL, rfl⟩, _⟩ := hN
    intro p hp
    exact (section_uncurry_rel h hX (hL p hp).1).mpr
      ((rel_sstepFun_iff h.1 hX hL).mp hrel p hp)

def smashCurryEquiv (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    (V₂ : NeighborhoodSystem ?) :
    StrictMap (smash V₀ V₁) V₂ ≃o StrictMap V₀ (strictFun V₁ V₂) where
  toFun := smashCurryMap
  invFun := smashUncurryMap
  left_inv := smashUncurry_curry
  right_inv := smashCurry_uncurry
  map_rel_iff' := by
    intro g g'
    constructor
    · intro hcurry W Z hrel
      have h1 : (smashCurryMap g).1.rel (Sum.inl ^-1' W) (sstep (Sum.inr ^-1' W) Z) :=
     by
        have hu : (smashUncurryMap (smashCurryMap g)).1.rel W Z := by
          rw [smashUncurry_curry]; exact hrel
        exact hu.2
      have h2 := hcurry _ _ h1
      have hu' : (smashUncurryMap (smashCurryMap g')).1.rel W Z := ⟨g.1.rel_dom hrel,
    h2⟩
      rw [smashUncurry_curry] at hu'
      exact hu'
    · intro hg X N hrel
      obtain ⟨hX, hN, hmem⟩ := hrel
      refine ⟨hX, hN, ?_⟩
      obtain ⟨⟨L, hL, rfl⟩, _⟩ := hN
      intro p hp
      obtain ⟨hY, hmm⟩ := hmem p hp
      obtain ⟨W, hWmem, hWrel⟩ := hmm
      exact ⟨hY, W, hWmem, hg W p.2 hWrel⟩

end

section
variable {α β ? : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

def strictFunEquiv (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    (strictFun V₀ V₁).Element ≃o StrictMap V₀ V₁ where
  toFun := toStrictMap
  invFun := toStrictFilter
  left_inv φ := by
    apply Element.ext
    intro W
    constructor
    · rintro ⟨hWmem, hfW⟩
      obtain ⟨⟨L, hL, rfl⟩, _⟩ := hWmem
      exact (mem_sstepFun_iff φ hL).mpr (fun p hp => hfW p hp)
```

```
    · intro hW
      refine ⟨φ.sub hW, ?_⟩
      obtain ⟨⟨L, hL, rfl⟩, _⟩ := φ.sub hW
      intro p hp
      exact (mem_sstepFun_iff φ hL).mp hW p hp
  right_inv f := by
    apply Subtype.ext
    apply ApproximableMap.ext
    intro X Y
    constructor
    · rintro ⟨_, hf⟩; exact hf
    · intro hf; exact ⟨sstep_mem_of_mem (g := f) hf, hf⟩
  map_rel_iff' := by
    intro φ φ'
    constructor
    · intro h W hW
      obtain ⟨⟨L, hL, rfl⟩, _⟩ := φ.sub hW
      refine (mem_sstepFun_iff φ' hL).mpr (fun p hp => ?_)
      exact h p.1 p.2 ((mem_sstepFun_iff φ hL).mp hW p hp)
    · intro h X Y hrel
      exact h _ hrel

theorem isStrict_idMap : IsStrict (idMap V₀) := by
  rintro Y ⟨_, hY, hsub⟩
  exact Set.Subset.antisymm (V₀.sub_master hY) hsub

end

section
variable {α β ? : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

theorem smash_mem_iff {W : Set (α ? β)} :
    (smash V₀ V₁).mem W ↔
      W = prodNbhd V₀.master V₁.master ∨ SmashProper V₀ V₁ W := Iff.rfl
end

end DomainTheory.NeighbourhoodSystems.Exercise510
end
```

3.6.12 Exercise 5.11 — stack combinators

For any domain $\mathcal{D}$ we may regard $\mathcal{D}^\infty$ as consisting of (bottomless) *stacks* of elements of $\mathcal{D}$. With this image in mind, define appropriate combinators with the obvious meanings:

$$\{\mathrm{head} : \mathcal{D}^\infty \to \mathcal{D}\}; \quad \{\mathrm{tail} : \mathcal{D}^\infty \to \mathcal{D}^\infty\}; \quad \{\mathrm{push} : \mathcal{D} \times \mathcal{D}^\infty \to \mathcal{D}^\infty\}.$$

Using the fixed-point theorem argue that there is a combinator

$$\{\mathrm{diag} : \mathcal{D} \to \mathcal{D}^\infty\}$$

where for all $x \in |\mathcal{D}|$ we have

$$\mathrm{diag}(x) = \langle x \rangle_{n=0}^{\infty}.$$

(Hint: Try a recursive definition, say

$$\mathrm{diag}(x) = \mathrm{push}(x, \mathrm{diag}(x)),$$

but be sure to prove *all* terms of $\mathrm{diag}(x)$ equal x.) Also introduce by an appropriate recursion a combinator

$$\{\mathrm{map} : (D \to D)^\infty \times D \to D^\infty\}$$

where for elements of the suitable types:

$$\mathrm{map}(\langle f_n \rangle_{n=0}^\infty, x) = \langle f_n(x) \rangle_{n=0}^\infty.$$

Exercise_5_11.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_25
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Theorem_2_7
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_16
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_14

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise511
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap

section
variable {α : Type*} (V : NeighborhoodSystem α)

def fold : ApproximableMap (prod V (iterSys V)) (iterSys V) := ofIso (iterProdIso V).
    symm

theorem iterProdIso_apply (z : (iterSys V).Element) :
    iterProdIso V z = pair (component z 0) (ofSeq (fun n => component z (n + 1))) :=
    rfl

def push : ApproximableMap (prod V (iterSys V)) (iterSys V) := fold V

def unfold : ApproximableMap (iterSys V) (prod V (iterSys V)) := ofIso (iterProdIso V)

def head : ApproximableMap (iterSys V) V := (proj₀ V (iterSys V)).comp (unfold V)

@[simp] theorem head_apply (z : (iterSys V).Element) :
    (head V).toElementMap z = component z 0 := by
  rw [head, toElementMap_comp, unfold, toElementMap_ofIso, toElementMap_proj₀,
    iterProdIso_apply, fst_pair]

def tail : ApproximableMap (iterSys V) (iterSys V) := (proj₁ V (iterSys V)).comp (
    unfold V)
```

```
@[simp] theorem tail_apply (z : (iterSys V).Element) :
    (tail V).toElementMap z = ofSeq (fun n => component z (n + 1)) := by
  rw [tail, toElementMap_comp, unfold, toElementMap_ofIso, toElementMap_proj₁,
    iterProdIso_apply, snd_pair]

abbrev Arg (V : NeighborhoodSystem α) := prod (iterSys (funSpace V V)) V

def diag : ApproximableMap V (iterSys V) :=
  (fixMap (iterSys V)).comp (curry (push V))

def mapBody : ApproximableMap (prod (funSpace (Arg V) (iterSys V)) (Arg V)) (iterSys V
    ) :=
  (push V).comp
    (paired
      ((evalMap V V).comp
        (paired
          ((head (funSpace V V)).comp ((proj₀ (iterSys (funSpace V V)) V).comp
            (proj₁ (funSpace (Arg V) (iterSys V)) (Arg V))))
          ((proj₁ (iterSys (funSpace V V)) V).comp
            (proj₁ (funSpace (Arg V) (iterSys V)) (Arg V)))))
      ((evalMap (Arg V) (iterSys V)).comp
        (paired (proj₀ (funSpace (Arg V) (iterSys V)) (Arg V))
          (paired
            ((tail (funSpace V V)).comp ((proj₀ (iterSys (funSpace V V)) V).comp
              (proj₁ (funSpace (Arg V) (iterSys V)) (Arg V))))
            ((proj₁ (iterSys (funSpace V V)) V).comp
              (proj₁ (funSpace (Arg V) (iterSys V)) (Arg V)))))))

def mapOp : ApproximableMap (funSpace (Arg V) (iterSys V)) (funSpace (Arg V) (iterSys
    V)) :=
  curry (mapBody V)

def mapMap : ApproximableMap (Arg V) (iterSys V) := toApproxMap (mapOp V).fixElement

theorem component_tail (z : (iterSys V).Element) (n : ℕ) :
    component ((tail V).toElementMap z) n = component z (n + 1) := by
  rw [tail_apply, component_ofSeq]
end
end DomainTheory.NeighbourhoodSystems.Exercise511

section
namespace DomainTheory.NeighbourhoodSystems.Exercise511
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap
section
variable {α : Type*} (V : NeighborhoodSystem α)

theorem diag_rec (x : V.Element) :
    (diag V).toElementMap x =
      (push V).toElementMap (pair x ((diag V).toElementMap x)) := by
  rw [diag, toElementMap_comp]
  set φ := (curry (push V)).toElementMap x with hφ
  have hfix := fixMap_fixed (iterSys V) φ
  have hval := toElementMap_curry_apply (push V) x ((fixMap (iterSys V)).toElementMap
    φ)
  rw [← hφ] at hval
```

```
  rw [hval] at hfix
  exact hfix.symm

theorem fold_unfold (z : (iterSys V).Element) :
    (fold V).toElementMap ((unfold V).toElementMap z) = z := by
  rw [unfold, fold, toElementMap_ofIso, toElementMap_ofIso, OrderIso.symm_apply_apply]

theorem mapBody_apply (W : (funSpace (Arg V) (iterSys V)).Element)
    (s : (iterSys (funSpace V V)).Element) (x : V.Element) :
    (mapBody V).toElementMap (pair W (pair s x)) =
      (push V).toElementMap
        (pair ((toApproxMap ((head (funSpace V V)).toElementMap s)).toElementMap x)
          ((toApproxMap W).toElementMap (pair ((tail (funSpace V V)).toElementMap s) x
   ))) := by
  rw [mapBody, toElementMap_comp]
  simp only [toElementMap_paired, toElementMap_comp, toElementMap_proj₀,
    toElementMap_proj₁,
    fst_pair, snd_pair, evalMap_apply]

theorem map_rec (s : (iterSys (funSpace V V)).Element) (x : V.Element) :
    (mapMap V).toElementMap (pair s x) =
      (push V).toElementMap
        (pair ((toApproxMap ((head (funSpace V V)).toElementMap s)).toElementMap x)
          ((mapMap V).toElementMap (pair ((tail (funSpace V V)).toElementMap s) x)))
    := by
  have hfix : (mapOp V).toElementMap (mapOp V).fixElement = (mapOp V).fixElement :=
    toElementMap_fixElement (mapOp V)
  have hval := toElementMap_curry_apply (mapBody V) (mapOp V).fixElement (pair s x)
  rw [← mapOp, hfix] at hval
  rw [mapMap, hval, mapBody_apply]

theorem push_head_tail (z : (iterSys V).Element) :
    (push V).toElementMap (pair ((head V).toElementMap z) ((tail V).toElementMap z)) =
     z := by
  rw [head, tail, toElementMap_comp, toElementMap_comp, toElementMap_proj₀,
    toElementMap_proj₁,
    pair_fst_snd, push, fold_unfold]

theorem unfold_fold (p : (prod V (iterSys V)).Element) :
    (unfold V).toElementMap ((fold V).toElementMap p) = p := by
  rw [unfold, fold, toElementMap_ofIso, toElementMap_ofIso, OrderIso.apply_symm_apply]

theorem head_push (x : V.Element) (s : (iterSys V).Element) :
    (head V).toElementMap ((push V).toElementMap (pair x s)) = x := by
  rw [head, toElementMap_comp, push, unfold_fold, toElementMap_proj₀, fst_pair]

theorem tail_push (x : V.Element) (s : (iterSys V).Element) :
    (tail V).toElementMap ((push V).toElementMap (pair x s)) = s := by
  rw [tail, toElementMap_comp, push, unfold_fold, toElementMap_proj₁, snd_pair]

theorem component_diag (x : V.Element) (n : ℕ) :
    component ((diag V).toElementMap x) n = x := by
  induction n with
  | zero =>
    rw [← head_apply, diag_rec, head_push]
  | succ k ih =>
```

```
    have ht : (tail V).toElementMap ((diag V).toElementMap x) = (diag V).toElementMap
    x := by
      conv_lhs => rw [diag_rec]
      rw [tail_push]
    rw [← component_tail, ht, ih]

theorem component_map (x : V.Element) :
    ∀ (n : ℕ) (s : (iterSys (funSpace V V)).Element),
      component ((mapMap V).toElementMap (pair s x)) n =
        (toApproxMap (component s n)).toElementMap x := by
  intro n
  induction n with
  | zero =>
    intro s
    rw [← head_apply, map_rec, head_push, head_apply]
  | succ k ih =>
    intro s
    have ht : (tail V).toElementMap ((mapMap V).toElementMap (pair s x)) =
        (mapMap V).toElementMap (pair ((tail (funSpace V V)).toElementMap s) x) := by
      conv_lhs => rw [map_rec]
      rw [tail_push]
    rw [← component_tail, ht, ih, component_tail]

end

end DomainTheory.NeighbourhoodSystems.Exercise511
end
```

3.6.13 Exercise 5.12 — while combinator

On any domain D introduce (as a least fixed point) a combinator

$$\text{while} : (D \to T) \times (D \to D) \to (D \to D)$$

by the recursion

$$\text{while}(p, f)(x) = \text{cond}(p(x), \text{while}(p, f)(f(x)), x).$$

Prove that

$$\text{while}(p, \text{while}(p, f)) = \text{while}(p, f).$$

Show how while could have been used to obtain the least number operator mentioned in the proof of 5.6. Generalize the idea to define a combinator

$$\{\text{find} : D^\infty \times (D \to T) \to D\}$$

with the meaning "find the first term of the sequence (if any) which satisfies the given precicate."

Exercise_5_12.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_1
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise512
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap
open DomainTheory.NeighbourhoodSystems.Exercise326 (cond TD)

section
variable {α : Type*} (V : NeighborhoodSystem α)
  (p : ApproximableMap V TD) (f : ApproximableMap V V)

def bodyMap : ApproximableMap (prod (funSpace V V) V) V :=
  (cond V).comp
    (paired (p.comp (proj₁ (funSpace V V) V))
      (paired
        ((evalMap V V).comp
          (paired (proj₀ (funSpace V V) V) (f.comp (proj₁ (funSpace V V) V))))
        (proj₁ (funSpace V V) V)))

def Wop : ApproximableMap (funSpace V V) (funSpace V V) := curry (bodyMap V p f)

def whileFix : (funSpace V V).Element := (Wop V p f).fixElement

def whileMap : ApproximableMap V V := toApproxMap (whileFix V p f)

theorem bodyMap_apply (w : (funSpace V V).Element) (x : V.Element) :
    (bodyMap V p f).toElementMap (pair w x) =
      (cond V).toElementMap
        (pair (p.toElementMap x)
          (pair ((toApproxMap w).toElementMap (f.toElementMap x)) x)) := by
  rw [bodyMap, toElementMap_comp]
  simp only [toElementMap_paired, toElementMap_comp, toElementMap_proj₀,
    toElementMap_proj₁,
    fst_pair, snd_pair, evalMap_apply]

theorem Wop_apply (w : (funSpace V V).Element) (x : V.Element) :
    (toApproxMap ((Wop V p f).toElementMap w)).toElementMap x =
      (cond V).toElementMap
        (pair (p.toElementMap x)
          (pair ((toApproxMap w).toElementMap (f.toElementMap x)) x)) := by
  rw [Wop, toElementMap_curry_apply, bodyMap_apply]

theorem whileMap_least (w' : (funSpace V V).Element)
    (hw' : ∀ x : V.Element, (toApproxMap w').toElementMap x =
      (cond V).toElementMap
        (pair (p.toElementMap x)
          (pair ((toApproxMap w').toElementMap (f.toElementMap x)) x))) :
    whileFix V p f ≤ w' := by
```

```
  apply fixElement_le_of_toElementMap_le
  apply le_of_eq
  apply (funSpaceEquiv V V).injective
  rw [funSpaceEquiv_apply, funSpaceEquiv_apply]
  apply ext_of_toElementMap
  intro x
  rw [Wop_apply]
  exact (hw' x).symm
end
end DomainTheory.NeighbourhoodSystems.Exercise512

section
namespace DomainTheory.NeighbourhoodSystems.Exercise512
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap
open DomainTheory.NeighbourhoodSystems.Exercise326 (cond TD)
section
variable {α : Type*} (V : NeighborhoodSystem α)
  (p : ApproximableMap V TD) (f : ApproximableMap V V)

theorem whileMap_rec (x : V.Element) :
    (whileMap V p f).toElementMap x =
      (cond V).toElementMap
        (pair (p.toElementMap x)
          (pair ((whileMap V p f).toElementMap (f.toElementMap x)) x)) := by
  have hfix : (Wop V p f).toElementMap (whileFix V p f) = whileFix V p f :=
    toElementMap_fixElement (Wop V p f)
  have := Wop_apply V p f (whileFix V p f) x
  rw [hfix] at this
  exact this
end

section
variable {α : Type*} (V : NeighborhoodSystem α)
  (p : ApproximableMap V TD) (f : ApproximableMap V V)

theorem whileMap_bot {x : V.Element} (hx : p.toElementMap x = Example23.botElt) :
    (whileMap V p f).toElementMap x = V.bot := by
  rw [whileMap_rec, hx, Exercise326.cond_bot]

theorem whileMap_false {x : V.Element} (hx : p.toElementMap x = Example23.falseElt) :
    (whileMap V p f).toElementMap x = x := by
  rw [whileMap_rec, hx, Exercise326.cond_false]

theorem whileMap_true {x : V.Element} (hx : p.toElementMap x = Example23.trueElt) :
    (whileMap V p f).toElementMap x = (whileMap V p f).toElementMap (f.toElementMap x)
     := by
  rw [whileMap_rec, hx, Exercise326.cond_true]

end

end DomainTheory.NeighbourhoodSystems.Exercise512
end
```

3.6.14 Exercise 5.13 — pairing function on numbers

Prove the existence of a one-one function $\mathrm{num} : \mathbf{N} \times \mathbf{N} \to \mathbf{N}$ such that

$$\mathrm{num}(0,0) = 0;$$

$$\mathrm{num}(n, m+1) = \mathrm{num}(n+1, m) + 1;$$

$$\mathrm{num}(n+1, 0) = \mathrm{num}(0, n) + 1.$$

Draw a picture (i.e. an infinite matrix) for the function and find a closed form for its values, if possible. Use the function to prove the isomorphism of the domains

$$P\mathbf{N},\ P(\mathbf{N} \times \mathbf{N}),\ P\mathbf{N} \times P\mathbf{N}.$$

Exercise_5_13.lean

```
module

public import Aesop.BuiltinRules
public import Mathlib.Algebra.Ring.Parity
public import Mathlib.Data.Nat.Basic
public import Mathlib.Tactic.NormNum
public import Mathlib.Tactic.Ring
public import Mathlib.Tactic.ToDual
public import Mathlib.Tactic.ToAdditive

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise513
section

def nextCell : ℕ × ℕ → ℕ × ℕ
  | (n + 1, m) => (n, m + 1)
  | (0, m) => (m + 1, 0)
end

section

def tri (k : ℕ) : ℕ := k * (k + 1) / 2
end

section

def num (n m : ℕ) : ℕ := tri (n + m) + m
end

section

def numP (p : ℕ × ℕ) : ℕ := num p.1 p.2
end

section
```

```
theorem num_succ_right (n m : ℕ) : num n (m + 1) = num (n + 1) m + 1 := by
  unfold num
  have h : n + (m + 1) = (n + 1) + m := by omega
  rw [h]; omega
end

section
theorem num_zero_zero : num 0 0 = 0 := rfl
end

section

theorem two_dvd_mul_succ (k : ℕ) : 2 ? k * (k + 1) := by
  induction k with
  | zero => exact ⟨0, by ring⟩
  | succ n ih =>
      obtain ⟨c, hc⟩ := ih
      refine ⟨c + (n + 1), ?_⟩
      have hexp : (n + 1) * (n + 1 + 1) = n * (n + 1) + 2 * (n + 1) := by ring
      rw [hexp, hc]; ring
end

section

theorem tri_mul_two (k : ℕ) : tri k * 2 = k * (k + 1) := by
  unfold tri
  exact Nat.div_mul_cancel (two_dvd_mul_succ k)
end

section

theorem tri_succ (k : ℕ) : tri (k + 1) = tri k + (k + 1) := by
  have e1 : tri k * 2 = k * (k + 1) := tri_mul_two k
  have e2 : tri (k + 1) * 2 = (k + 1) * (k + 1 + 1) := tri_mul_two (k + 1)
  have key : tri (k + 1) * 2 = (tri k + (k + 1)) * 2 := by
    have hexp : (tri k + (k + 1)) * 2 = tri k * 2 + (k + 1) * 2 := by ring
    rw [hexp, e1, e2]; ring
  exact Nat.eq_of_mul_eq_mul_right (by norm_num) key
end

section

theorem num_lt_tri_succ (n m : ℕ) : num n m < tri (n + m + 1) := by
  rw [tri_succ]; unfold num; omega
end

section
theorem num_succ_left (n : ℕ) : num (n + 1) 0 = num 0 n + 1 := by
  unfold num
  have h0 : (n + 1) + 0 = n + 1 := by omega
  have h1 : 0 + n = n := by omega
  rw [h0, h1, tri_succ]; omega
end

section
theorem numP_nextCell (c : ℕ × ℕ) : numP (nextCell c) = numP c + 1 := by
```

```
  obtain ⟨n, m⟩ := c
  cases n with
  | zero => exact num_succ_left m
  | succ k => exact num_succ_right k m
end

section
theorem tri_le_succ (k : ℕ) : tri k ≤ tri (k + 1) := by
  rw [tri_succ]; omega
end

section

theorem tri_mono {a b : ℕ} (h : a ≤ b) : tri a ≤ tri b := by
  induction h with
  | refl => exact le_refl _
  | step _ ih => exact le_trans ih (tri_le_succ _)
end

section

theorem num_injective : Function.Injective numP := by
  rintro ⟨n₁, m₁⟩ ⟨n₂, m₂⟩ h
  have h' : num n₁ m₁ = num n₂ m₂ := h
  have hs : n₁ + m₁ = n₂ + m₂ := by
    rcases lt_trichotomy (n₁ + m₁) (n₂ + m₂) with hlt | heq | hgt
    · exfalso
      have h1 : num n₁ m₁ < tri (n₁ + m₁ + 1) := num_lt_tri_succ n₁ m₁
      have h2 : tri (n₁ + m₁ + 1) ≤ tri (n₂ + m₂) := tri_mono (by omega)
      have h3 : tri (n₂ + m₂) ≤ num n₂ m₂ := by unfold num; omega
      omega
    · exact heq
    · exfalso
      have h1 : num n₂ m₂ < tri (n₂ + m₂ + 1) := num_lt_tri_succ n₂ m₂
      have h2 : tri (n₂ + m₂ + 1) ≤ tri (n₁ + m₁) := tri_mono (by omega)
      have h3 : tri (n₁ + m₁) ≤ num n₁ m₁ := by unfold num; omega
      omega
  have hbase : tri (n₁ + m₁) + m₁ = tri (n₂ + m₂) + m₂ := h'
  rw [hs] at hbase
  have hm : m₁ = m₂ := by omega
  have hn : n₁ = n₂ := by omega
  subst hm; subst hn; rfl
end

section

def unnum : ℕ → ℕ × ℕ
  | 0 => (0, 0)
  | v + 1 => nextCell (unnum v)
end

section
theorem numP_unnum (v : ℕ) : numP (unnum v) = v := by
  induction v with
  | zero => exact num_zero_zero
  | succ k ih =>
```

```
      show numP (nextCell (unnum k)) = k + 1
      rw [numP_nextCell, ih]
end

section
theorem unnum_numP (c : ℕ × ℕ) : unnum (numP c) = c :=
  num_injective (by rw [numP_unnum])
end

end DomainTheory.NeighbourhoodSystems.Exercise513
```

3.6.15 Exercise 5.13 — powerset isomorphisms

Prove the existence of a one-one function $\mathrm{num} : \mathbf{N} \times \mathbf{N} \to \mathbf{N}$ such that

$$\mathrm{num}(0,0) = 0;$$

$$\mathrm{num}(n, m+1) = \mathrm{num}(n+1, m) + 1;$$

$$\mathrm{num}(n+1, 0) = \mathrm{num}(0, n) + 1.$$

Draw a picture (i.e. an infinite matrix) for the function and find a closed form for its values, if possible. Use the function to prove the isomorphism of the domains

$$P\mathbf{N},\ P(\mathbf{N} \times \mathbf{N}),\ P\mathbf{N} \times P\mathbf{N}.$$

Exercise_5_13b.lean

```
module

public import Mathlib.Logic.Equiv.Nat

public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Exercise_5_13
public import Mathlib.Algebra.Group.End

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems.Exercise513
section

def numEquiv : ℕ × ℕ ≃ ℕ where
  toFun := numP
  invFun := unnum
  left_inv := unnum_numP
  right_inv := numP_unnum
end

section
@[simp] theorem numEquiv_apply (p : ℕ × ℕ) : numEquiv p = num p.1 p.2 := rfl
end
```

```
section
variable {α β : Type*}

def setCongr (e : α ≃ β) : Set α ≃o Set β where
  toFun S := e '' S
  invFun T := e.symm '' T
  left_inv := e.symm_image_image
  right_inv := e.symm.symm_image_image
  map_rel_iff' := by
    intro a b
    constructor
    · intro h x hx
      obtain ⟨y, hy, hey⟩ := h ⟨x, hx, rfl⟩
      rwa [e.injective hey] at hy
    · rintro h _ ⟨x, hx, rfl⟩
      exact ⟨x, h hx, rfl⟩

def PN_orderIso_PNN : Set ℕ ≃o Set (ℕ × ℕ) := setCongr numEquiv.symm

def PN_orderIso_prod : Set ℕ ≃o Set ℕ × Set ℕ :=
  (setCongr Equiv.natSumNatEquivNat.symm).trans Set.sumEquiv

def PNN_orderIso_prod : Set (ℕ × ℕ) ≃o Set ℕ × Set ℕ :=
  PN_orderIso_PNN.symm.trans PN_orderIso_prod

end

end DomainTheory.NeighbourhoodSystems.Exercise513
end
```

3.6.16 Exercise 5.14 — functions as graphs

Show that there are approximable mappings

$$\text{graph} : (P\mathbf{N} \to P\mathbf{N}) \to P\mathbf{N} \quad \text{and} \quad \text{fun} : P\mathbf{N} \to (P\mathbf{N} \to P\mathbf{N}),$$

where we have

$$\text{fun} \circ \text{graph} = \lambda f.\, f, \quad \text{and} \quad \text{graph} \circ \text{fun} \supseteq \lambda x.\, x.$$

(Hint: Using the notation

$$[n_0, n_1, \ldots, n_k] = \text{num}(n_0, [n_1, \ldots, n_k])$$

two such combinators can be given by formulae

$$\text{fun}(u)(x) = \{m \mid \exists n_0, \ldots, n_{k-1} \in x.\, [n_0 + 1, \ldots, n_{k-1} + 1, 0, m] \in u\}$$

$$\text{graph}(f) = \{[n_0 + 1, \ldots, n_{k-1} + 1, 0, m] \mid m \in f(\{n_0, \ldots, n_{k-1}\})\}$$

where k is variable — meaning all finite sequences are to be considered.)

Exercise_5_14.lean

```
module

public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Exercise_5_13

public import Mathlib.Data.Set.Defs

@[expose] public section

section

namespace DomainTheory.NeighbourhoodSystems.Exercise514

open DomainTheory.NeighbourhoodSystems.Exercise513

def tag : List ℕ → ℕ → ℕ
  | [], m => num 0 m
  | (n :: ns), m => num (n + 1) (tag ns m)

end DomainTheory.NeighbourhoodSystems.Exercise514
end

section
namespace DomainTheory.NeighbourhoodSystems.Exercise514
open DomainTheory.NeighbourhoodSystems.Exercise513

section
@[simp] theorem tag_nil (m : ℕ) : tag [] m = num 0 m := rfl
end

section
@[simp] theorem tag_cons (n : ℕ) (ns : List ℕ) (m : ℕ) :
    tag (n :: ns) m = num (n + 1) (tag ns m) := rfl
end

section

def entries (ns : List ℕ) : Set ℕ := {n | n ∈ ns}
end

section
@[simp] theorem mem_entries {n : ℕ} {ns : List ℕ} : n ∈ entries ns ↔ n ∈ ns := Iff.
    rfl
end

section

def Fun (u : Set ℕ) (x : Set ℕ) : Set ℕ :=
  {m | ∃ ns, (∀ n ∈ ns, n ∈ x) ∧ tag ns m ∈ u}
end

section

def Graph (f : Set ℕ → Set ℕ) : Set ℕ :=
  {c | ∃ ns m, c = tag ns m ∧ m ∈ f (entries ns)}
```

```
end

section

def IsApprox (f : Set ℕ → Set ℕ) : Prop :=
  (∀ {{x x' : Set ℕ}}, x ⊆ x' → f x ⊆ f x') ∧
    ∀ x m, m ∈ f x → ∃ ns, (∀ n ∈ ns, n ∈ x) ∧ m ∈ f (entries ns)
end

section

theorem Fun_isApprox (u : Set ℕ) : IsApprox (Fun u) := by
  refine ⟨?_, ?_⟩
  · intro x x' hxx' m hm
    obtain ⟨ns, hsub, htag⟩ := hm
    exact ⟨ns, fun n hn => hxx' (hsub n hn), htag⟩
  · intro x m hm
    obtain ⟨ns, hsub, htag⟩ := hm
    exact ⟨ns, hsub, ns, fun n hn => hn, htag⟩
end

section

theorem Fun_mono {u u' x x' : Set ℕ} (hu : u ⊆ u') (hx : x ⊆ x') : Fun u x ⊆ Fun u' x
    ' := by
  rintro m ⟨ns, hns, htag⟩
  exact ⟨ns, fun n hn => hx (hns n hn), hu htag⟩
end

section

theorem num_succ_left_gt (n b : ℕ) : b < num (n + 1) b := by
  unfold num
  have e : n + 1 + b = (n + b) + 1 := by omega
  rw [e, tri_succ]
  omega
end

section

theorem tag_injective : ∀ {ns₁ ns₂ : List ℕ} {m₁ m₂ : ℕ},
    tag ns₁ m₁ = tag ns₂ m₂ → ns₁ = ns₂ ∧ m₁ = m₂ := by
  intro ns₁
  induction ns₁ with
  | nil =>
      intro ns₂ m₁ m₂ h
      cases ns₂ with
      | nil =>
          have hp := num_injective (show numP (0, m₁) = numP (0, m₂) from h)
          injection hp with _ hm
          exact ⟨rfl, hm⟩
      | cons n₂ ns₂' =>
          exfalso
          have hp := num_injective (show numP (0, m₁) = numP (n₂ + 1, tag ns₂' m₂) from
    h)
          injection hp with h1 _
```

```
          omega
  | cons n₁ ns₁' ih =>
      intro ns₂ m₁ m₂ h
      cases ns₂ with
      | nil =>
          exfalso
          have hp := num_injective (show numP (n₁ + 1, tag ns₁' m₁) = numP (0, m₂) from
     h)
          injection hp with h1 _
          omega
      | cons n₂ ns₂' =>
          have hp := num_injective
            (show numP (n₁ + 1, tag ns₁' m₁) = numP (n₂ + 1, tag ns₂' m₂) from h)
          injection hp with h1 h2
          have hn : n₁ = n₂ := by omega
          obtain ⟨hns, hm⟩ := ih h2
          exact ⟨by rw [hn, hns], hm⟩
end

section

theorem Fun_Graph {f : Set ℕ → Set ℕ} (hf : IsApprox f) (x : Set ℕ) :
    Fun (Graph f) x = f x := by
  apply Set.Subset.antisymm
  · intro m hm
    obtain ⟨ns, hsub, htag⟩ := hm
    obtain ⟨ns', m', heq, hmem⟩ := htag
    obtain ⟨hns, hmm⟩ := tag_injective heq
    subst hns; subst hmm
    have hsubset : entries ns ⊆ x := fun n hn => hsub n hn
    exact hf.1 hsubset hmem
  · intro m hm
    obtain ⟨ns, hsub, hmem⟩ := hf.2 x m hm
    exact ⟨ns, hsub, ns, m, rfl, hmem⟩
end

section

theorem tag_surjective (c : ℕ) : ∃ ns m, tag ns m = c := by
  induction c using Nat.strong_induction_on with
  | _ c ih =>
      obtain ⟨a, b, hab⟩ : ∃ a b, num a b = c :=
        ⟨(unnum c).1, (unnum c).2, numP_unnum c⟩
      cases a with
      | zero => exact ⟨[], b, hab⟩
      | succ k =>
          have hlt : b < c := by rw [← hab]; exact num_succ_left_gt k b
          obtain ⟨ns, m, hns⟩ := ih b hlt
          exact ⟨k :: ns, m, by rw [tag_cons, hns]; exact hab⟩
end

section

theorem id_le_Graph_Fun (u : Set ℕ) : u ⊆ Graph (Fun u) := by
  intro c hc
  obtain ⟨ns, m, hceq⟩ := tag_surjective c
```

```
  refine ⟨ns, m, hceq.symm, ?_⟩
  exact ⟨ns, fun n hn => hn, by rw [hceq]; exact hc⟩
end

end DomainTheory.NeighbourhoodSystems.Exercise514
end
```

3.6.17 Exercise 5.15 — star of a word

(For algebraists.) We can regard $\langle \{0,1\}^*, \Lambda, \cdot \rangle$ as the free semigroup on two generators 0 and 1. The powerset $P\{0,1\}^*$ is taken as a domain as in Exercise 4.17. For "words" $e \in \{0,1\}^*$ define

$$e^* = \{\Lambda, e, e^2, e^3, \ldots, e^n, \ldots\}.$$

Show that the least fixed point of

$$z = \{e\} \cdot z \cup \{e'\}$$

in $P\{0,1\}^*$ is $z = e^* \cdot \{e'\}$.

Show further (as suggested by David Park) that the least solution of

$$x = a \cdot x \cup b \cdot y \cup c,$$
$$y = b \cdot x \cup a \cdot y \cup d$$

has

$$x = (a \cup b \cdot a^* \cdot b)^* \cdot (c \cup b \cdot a^* \cdot d),$$

where the $\{\cdot\}$ has been dropped off $\{a\}$, $\{b\}$ etc., and where the *-notation has been extended to the whole domain, so that $z^* = \Lambda \cup z^* \cdot z$.

(Hint: Apply 5.3.)

Exercise_5_15.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_14
public import Mathlib.Algebra.FreeMonoid.Basic
public import Mathlib.Algebra.Group.Pointwise.Set.Basic

@[expose] public section

section

namespace DomainTheory.NeighbourhoodSystems.Exercise515

open Pointwise

open DomainTheory.NeighbourhoodSystems.Exercise414

variable {S : Type*} [Monoid S]

def kpow (z : Set S) : ℕ → Set S
```

```
  | 0 => 1
  | n + 1 => z * kpow z n

end DomainTheory.NeighbourhoodSystems.Exercise515
end

section
namespace DomainTheory.NeighbourhoodSystems.Exercise515
open Pointwise
open DomainTheory.NeighbourhoodSystems.Exercise414

section
variable {S : Type*} [Monoid S]

@[simp] theorem kpow_zero (z : Set S) : kpow z 0 = 1 := rfl

@[simp] theorem kpow_succ (z : Set S) (n : ℕ) : kpow z (n + 1) = z * kpow z n := rfl

def G (z v : Set S) (w : Set S) : Set S := z * w ∪ v

def star (z : Set S) : Set S := {s | ∃ n, s ∈ kpow z n}

def parkA (a b : Set S) : Set S := a ∪ b * star a * b

def parkC (a b c d : Set S) : Set S := c ∪ b * star a * d

def parkX (a b c d : Set S) : Set S := star (parkA a b) * parkC a b c d

def parkY (a b c d : Set S) : Set S := star a * (b * parkX a b c d ∪ d)

theorem mem_kpow_singleton (e s : S) (n : ℕ) : s ∈ kpow ({e} : Set S) n ↔ s = e ^ n
    := by
  induction n generalizing s with
  | zero => rw [kpow_zero, pow_zero]; exact Set.mem_one
  | succ m ih =>
      rw [kpow_succ, pow_succ', Set.mem_mul]
      constructor
      · rintro ⟨a, ha, t, ht, rfl⟩
        rw [Set.mem_singleton_iff] at ha
        rw [(ih t).mp ht, ha]
      · rintro rfl
        exact ⟨e, Set.mem_singleton_iff.mpr rfl, e ^ m, (ih (e ^ m)).mpr rfl, rfl⟩

theorem mem_star {z : Set S} {s : S} : s ∈ star z ↔ ∃ n, s ∈ kpow z n := Iff.rfl

theorem mem_star_singleton (e s : S) : s ∈ star ({e} : Set S) ↔ ∃ n, s = e ^ n := by
  rw [mem_star]
  constructor
  · rintro ⟨n, hn⟩; exact ⟨n, (mem_kpow_singleton e s n).mp hn⟩
  · rintro ⟨n, rfl⟩; exact ⟨n, (mem_kpow_singleton e (e ^ n) n).mpr rfl⟩

theorem smul_assoc (a b c : Set S) : a * b * c = a * (b * c) := by
  ext s; simp only [Set.mem_mul]
  constructor
  · rintro ⟨u, ⟨p, hp, q, hq, rfl⟩, w, hw, rfl⟩
    exact ⟨p, hp, q * w, ⟨q, hq, w, hw, rfl⟩, by rw [mul_assoc]⟩
```

```
  · rintro ⟨p, hp, u, ⟨q, hq, w, hw, rfl⟩, rfl⟩
    exact ⟨p * q, ⟨p, hp, q, hq, rfl⟩, w, hw, by rw [mul_assoc]⟩

theorem smul_union (a b c : Set S) : a * (b ∪ c) = a * b ∪ a * c := by
  ext s; simp only [Set.mem_mul, Set.mem_union]
  constructor
  · rintro ⟨u, hu, w, (hw | hw), rfl⟩
    · exact Or.inl ⟨u, hu, w, hw, rfl⟩
    · exact Or.inr ⟨u, hu, w, hw, rfl⟩
  · rintro (⟨u, hu, w, hw, rfl⟩ | ⟨u, hu, w, hw, rfl⟩)
    · exact ⟨u, hu, w, Or.inl hw, rfl⟩
    · exact ⟨u, hu, w, Or.inr hw, rfl⟩

theorem star_eq (z : Set S) : star z = (1 : Set S) ∪ z * star z := by
  apply Set.Subset.antisymm
  · intro s hs
    obtain ⟨n, hn⟩ := mem_star.mp hs
    cases n with
    | zero =>
        rw [kpow_zero] at hn
        rw [Set.mem_union]; exact Or.inl hn
    | succ m =>
        rw [kpow_succ, Set.mem_mul] at hn
        obtain ⟨a, ha, t, ht, rfl⟩ := hn
        rw [Set.mem_union]; right
        rw [Set.mem_mul]
        exact ⟨a, ha, t, mem_star.mpr ⟨m, ht⟩, rfl⟩
  · intro s hs
    rw [Set.mem_union] at hs
    rcases hs with h1 | h2
    · exact mem_star.mpr ⟨0, by rw [kpow_zero]; exact h1⟩
    · rw [Set.mem_mul] at h2
      obtain ⟨a, ha, t, ht, rfl⟩ := h2
      obtain ⟨m, hm⟩ := mem_star.mp ht
      exact mem_star.mpr ⟨m + 1, by rw [kpow_succ, Set.mem_mul]; exact ⟨a, ha, t, hm,
    rfl⟩⟩

theorem star_mul_subset_prefixed (z v x : Set S) (hx : z * x ∪ v ⊆ x) : star z * v ⊆ x
     := by
  have hvx : v ⊆ x := Set.subset_union_right.trans hx
  have hzx : z * x ⊆ x := Set.subset_union_left.trans hx
  have hpow : ∀ n, kpow z n * v ⊆ x := by
    intro n
    induction n with
    | zero => rw [kpow_zero, one_mul]; exact hvx
    | succ m ih =>
        rw [kpow_succ, smul_assoc]
        exact (Set.mul_subset_mul_left ih).trans hzx
  intro s hs
  rw [Set.mem_mul] at hs
  obtain ⟨a, ha, t, ht, rfl⟩ := hs
  obtain ⟨n, hn⟩ := mem_star.mp ha
  exact hpow n (by rw [Set.mem_mul]; exact ⟨a, hn, t, ht, rfl⟩)

theorem sunion_mul (a b c : Set S) : (a ∪ b) * c = a * c ∪ b * c := by
  ext s; simp only [Set.mem_mul, Set.mem_union]
```

```
  constructor
  · rintro ⟨u, (hu | hu), w, hw, rfl⟩
    · exact Or.inl ⟨u, hu, w, hw, rfl⟩
    · exact Or.inr ⟨u, hu, w, hw, rfl⟩
  · rintro (⟨u, hu, w, hw, rfl⟩ | ⟨u, hu, w, hw, rfl⟩)
    · exact ⟨u, Or.inl hu, w, hw, rfl⟩
    · exact ⟨u, Or.inr hu, w, hw, rfl⟩

theorem star_mul_isFixed (z v : Set S) : z * (star z * v) ∪ v = star z * v := by
  conv_rhs => rw [star_eq z]
  rw [sunion_mul, one_mul, smul_assoc]
  exact Set.union_comm _ _

theorem arden (z v : Set S) : lfpSet (G z v) = star z * v := by
  apply Set.Subset.antisymm
  · exact lfpSet_least (G z v) (star_mul_isFixed z v)
  · intro s hs x hx
    exact star_mul_subset_prefixed z v x hx hs

theorem parkX_eq (a b c d : Set S) :
    parkX a b c d = a * parkX a b c d ∪ b * parkY a b c d ∪ c := by
  have hfix : parkA a b * parkX a b c d ∪ parkC a b c d = parkX a b c d :=
    star_mul_isFixed (parkA a b) (parkC a b c d)
  conv_lhs => rw [← hfix]
  simp only [parkA, parkC, parkY, sunion_mul, smul_union, smul_assoc,
    Set.union_comm, Set.union_left_comm]

theorem parkY_eq (a b c d : Set S) :
    parkY a b c d = b * parkX a b c d ∪ a * parkY a b c d ∪ d := by
  have hfix : a * parkY a b c d ∪ (b * parkX a b c d ∪ d) = parkY a b c d :=
    star_mul_isFixed a (b * parkX a b c d ∪ d)
  conv_lhs => rw [← hfix]
  simp only [Set.union_assoc, Set.union_comm]

theorem park_least (a b c d : Set S) {x y : Set S}
    (hx : x = a * x ∪ b * y ∪ c) (hy : y = b * x ∪ a * y ∪ d) :
    parkX a b c d ⊆ x ∧ parkY a b c d ⊆ y := by
  have hax : a * x ⊆ x := by
    calc a * x ⊆ a * x ∪ b * y ∪ c := Set.subset_union_left.trans Set.
    subset_union_left
      _ = x := hx.symm
  have hby : b * y ⊆ x := by
    calc b * y ⊆ a * x ∪ b * y ∪ c := Set.subset_union_right.trans Set.
    subset_union_left
      _ = x := hx.symm
  have hcx : c ⊆ x := by
    calc c ⊆ a * x ∪ b * y ∪ c := Set.subset_union_right
      _ = x := hx.symm
  have hay : a * y ⊆ y := by
    calc a * y ⊆ b * x ∪ a * y ∪ d := Set.subset_union_right.trans Set.
    subset_union_left
      _ = y := hy.symm
  have hbx : b * x ⊆ y := by
    calc b * x ⊆ b * x ∪ a * y ∪ d := Set.subset_union_left.trans Set.
    subset_union_left
      _ = y := hy.symm
```

```
  have hdy : d ⊆ y := by
    calc d ⊆ b * x ∪ a * y ∪ d := Set.subset_union_right
      _ = y := hy.symm

  have hpre : a * y ∪ (b * x ∪ d) ⊆ y := Set.union_subset hay (Set.union_subset hbx
    hdy)
  have hyy : star a * (b * x ∪ d) ⊆ y := by
    rw [← arden a (b * x ∪ d)]
    exact lfpSet_subset (G a (b * x ∪ d)) hpre

  have key : b * star a * b * x ∪ b * star a * d = b * (star a * (b * x ∪ d)) := by
    simp only [smul_assoc, smul_union]

  have hprefixX : parkA a b * x ∪ parkC a b c d ⊆ x := by
    have hmid : b * star a * b * x ∪ b * star a * d ⊆ x := by
      rw [key]; exact (Set.mul_subset_mul_left hyy).trans hby
    have hm1 : b * star a * b * x ⊆ x := Set.subset_union_left.trans hmid
    have hm2 : b * star a * d ⊆ x := Set.subset_union_right.trans hmid
    unfold parkA parkC
    rw [sunion_mul]
    exact Set.union_subset (Set.union_subset hax hm1) (Set.union_subset hcx hm2)
  have hPX : parkX a b c d ⊆ x := by
    have harden : parkX a b c d = lfpSet (G (parkA a b) (parkC a b c d)) :=
      (arden (parkA a b) (parkC a b c d)).symm
    rw [harden]
    exact lfpSet_subset (G (parkA a b) (parkC a b c d)) hprefixX
  have hPY : parkY a b c d ⊆ y := by
    show star a * (b * parkX a b c d ∪ d) ⊆ y
    have h1 : b * parkX a b c d ∪ d ⊆ b * x ∪ d :=
      Set.union_subset_union_left d (Set.mul_subset_mul_left hPX)
    exact (Set.mul_subset_mul_left h1).trans hyy
  exact ⟨hPX, hPY⟩

theorem park_solves (a b c d : Set S) :
    parkX a b c d = a * parkX a b c d ∪ b * parkY a b c d ∪ c ∧
      parkY a b c d = b * parkX a b c d ∪ a * parkY a b c d ∪ d :=
  ⟨parkX_eq a b c d, parkY_eq a b c d⟩

theorem part1 (e e' : S) :
    lfpSet (fun w => ({e} : Set S) * w ∪ {e'}) = star ({e} : Set S) * {e'} := by
  have hG : (fun w => ({e} : Set S) * w ∪ {e'}) = G ({e} : Set S) {e'} := rfl
  rw [hG]; exact arden {e} {e'}

end

section
variable {S : Type*} [Monoid S]

theorem part1_freeMonoid (e e' : FreeMonoid Bool) :
    lfpSet (fun w => ({e} : Set (FreeMonoid Bool)) * w ∪ {e'})
      = star ({e} : Set (FreeMonoid Bool)) * {e'} :=
  part1 e e'
end

end DomainTheory.NeighbourhoodSystems.Exercise515
end
```

3.6.18 Exercise 5.16 — negation of sequences

Return to the discussion of Example 4.4 and the construction of the domain of finite and infinite binary sequences. Give a fixed-point definition of $\mathrm{neg} : C \to C$, where

$$\mathrm{neg}(0x) = 1\,\mathrm{neg}(x); \qquad \mathrm{neg}(1x) = 0\,\mathrm{neg}(x).$$

Prove that $\mathrm{neg}(\mathrm{neg}(x)) = x$ for all $x \in |C|$. Also define $\mathrm{merge} : C \times C \to C$, where for $\epsilon, \delta \in \{0, 1\}$ we have:

$$\mathrm{merge}(\epsilon x, \delta y) = \epsilon\,\delta\,\mathrm{merge}(x, y).$$

(Note: There may be a little trouble with $\mathrm{merge}(x, y)$ when x is finite and total and y is infinite—you have to decide what you want in e.g. $\mathrm{merge}(\Lambda, y)$.) Prove that

$$\mathrm{merge}(x, x) = d(x),$$

in the notation of 4.4. Consider also the infinite non-periodic sequence

$$t = 0\,\mathrm{merge}(\mathrm{neg}(t), \mathrm{tail}(t)).$$

Prove that the n^{th} digit of t is the sum mod 2 of the digits of the number n written in the binary scale (a suggestion of J. Lambek). Show also that $t \neq u\,a\,a\,a\,v$ where a is any finite sequence $\neq \Lambda$, and where u is finite.

Exercise_5_16.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_11
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_19
public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2
public import Mathlib.Data.Nat.Bits
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_16
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise516
section
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap ExampleB
    Example44 Exercise419

abbrev flip (σ : Str) : Str := σ.map not

@[simp] theorem flip_nil : flip [] = [] := rfl

@[simp] theorem flip_cons (b : Bool) (σ : Str) : flip (b :: σ) = (!b) :: flip σ := rfl
```

```
@[simp] theorem flip_flip (σ : Str) : flip (flip σ) = σ := by
  induction σ with
  | nil => rfl
  | cons b σ ih => simp [ih]

def double : Str → Str
  | [] => []
  | b :: σ => b :: b :: double σ

@[simp] theorem double_nil : double [] = [] := rfl

@[simp] theorem double_cons (b : Bool) (σ : Str) : double (b :: σ) = b :: b :: double
    σ := rfl

theorem double_append (σ τ : Str) : double (σ ++ τ) = double σ ++ double τ := by
  induction σ with
  | nil => rfl
  | cons b σ ih => simp [double, ih]

theorem double_prefix {σ τ : Str} (h : σ <+: τ) : double σ <+: double τ := by
  obtain ⟨?, rfl⟩ := h
  exact ⟨double ?, (double_append σ ?).symm⟩

theorem flip_prefix {σ τ : Str} (h : σ <+: τ) : flip σ <+: flip τ := h.map _

theorem not_strElem_le_strBot {σ τ : Str} : ¬ strElem σ ≤ strBot τ := by
  rw [strElem, strBot, C.principal_le_iff]
  exact not_cone_subset_singleton τ σ

theorem strBot_le_strBot_iff {σ τ : Str} : strBot σ ≤ strBot τ ↔ σ <+: τ := by
  rw [strBot, strBot, C.principal_le_iff, cone_subset_cone]

theorem strBot_le_strElem_iff {σ τ : Str} : strBot σ ≤ strElem τ ↔ σ <+: τ := by
  rw [strBot, strElem, C.principal_le_iff]
  exact singleton_subset_cone

theorem strElem_le_strElem_iff {σ τ : Str} : strElem σ ≤ strElem τ ↔ σ = τ := by
  rw [strElem, strElem, C.principal_le_iff, Set.singleton_subset_iff, Set.
    mem_singleton_iff,
    eq_comm]

end

section
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap ExampleB
    Example44 Exercise419
variable {β : Type*}

def tailSing : Str → C.Element
  | [] => strBot []
  | _ :: σ' => strElem σ'

theorem tail_hsing {σ τ : Str} (h : σ <+: τ) : strBot σ.tail ≤ tailSing τ := by
  cases τ with
  | nil => obtain rfl := List.prefix_nil.mp h; exact le_refl _
  | cons a τ' =>
```

```
    refine strBot_le_strElem_iff.mpr ?_
    cases σ with
    | nil => exact List.nil_prefix
    | cons b σ' =>
      obtain ⟨rfl, h'⟩ := List.cons_prefix_cons.mp h
      exact h'

end

section
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap ExampleB
    Example44 Exercise419

theorem tail_prefix {σ τ : Str} (h : σ <+: τ) : σ.tail <+: τ.tail := by
  obtain ⟨?, rfl⟩ := h
  cases σ with
  | nil => simp
  | cons a σ' => exact List.prefix_append σ' ?
end

section
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap ExampleB
    Example44 Exercise419
variable {β : Type*}

theorem tail_hcone {σ τ : Str} (h : σ <+: τ) : strBot σ.tail ≤ strBot τ.tail :=
  strBot_le_strBot_iff.mpr (tail_prefix h)

end
end DomainTheory.NeighbourhoodSystems.Exercise516

section
namespace DomainTheory.NeighbourhoodSystems.Exercise516
section
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap ExampleB
    Example44 Exercise419
variable {β : Type*}

def tailMap : ApproximableMap C C :=
  liftC C (fun σ => strBot σ.tail) tailSing tail_hcone tail_hsing

@[simp] theorem tailMap_strBot (σ : Str) :
    tailMap.toElementMap (strBot σ) = strBot σ.tail :=
  liftC_strBot C (fun σ => strBot σ.tail) tailSing tail_hcone tail_hsing σ

@[simp] theorem tailMap_strElem (σ : Str) :
    tailMap.toElementMap (strElem σ) = tailSing σ :=
  liftC_strElem C (fun σ => strBot σ.tail) tailSing tail_hcone tail_hsing σ

theorem neg_hcone {σ τ : Str} (h : σ <+: τ) : strBot (flip σ) ≤ strBot (flip τ) :=
  strBot_le_strBot_iff.mpr (flip_prefix h)

theorem neg_hsing {σ τ : Str} (h : σ <+: τ) : strBot (flip σ) ≤ strElem (flip τ) :=
  strBot_le_strElem_iff.mpr (flip_prefix h)

def negMap : ApproximableMap C C :=
```

```
  liftC C (fun σ => strBot (flip σ)) (fun σ => strElem (flip σ)) neg_hcone neg_hsing

@[simp] theorem negMap_strBot (σ : Str) :
    negMap.toElementMap (strBot σ) = strBot (flip σ) :=
  liftC_strBot C (fun σ => strBot (flip σ)) (fun σ => strElem (flip σ)) neg_hcone
    neg_hsing σ

@[simp] theorem negMap_strElem (σ : Str) :
    negMap.toElementMap (strElem σ) = strElem (flip σ) :=
  liftC_strElem C (fun σ => strBot (flip σ)) (fun σ => strElem (flip σ)) neg_hcone
    neg_hsing σ

theorem d_hcone {σ τ : Str} (h : σ <+: τ) : strBot (double σ) ≤ strBot (double τ) :=
  strBot_le_strBot_iff.mpr (double_prefix h)

theorem d_hsing {σ τ : Str} (h : σ <+: τ) : strBot (double σ) ≤ strElem (double τ) :=
  strBot_le_strElem_iff.mpr (double_prefix h)

def dMap : ApproximableMap C C :=
  liftC C (fun σ => strBot (double σ)) (fun σ => strElem (double σ)) d_hcone d_hsing

@[simp] theorem dMap_strBot (σ : Str) :
    dMap.toElementMap (strBot σ) = strBot (double σ) :=
  liftC_strBot C (fun σ => strBot (double σ)) (fun σ => strElem (double σ)) d_hcone
    d_hsing σ

@[simp] theorem dMap_strElem (σ : Str) :
    dMap.toElementMap (strElem σ) = strElem (double σ) :=
  liftC_strElem C (fun σ => strBot (double σ)) (fun σ => strElem (double σ)) d_hcone
    d_hsing σ

def shape : Bool → Str → Set Str
  | true, σ => {σ}
  | false, σ => cone σ

theorem memC_shape : ∀ (b : Bool) (σ : Str), memC (shape b σ)
  | true, σ => memC_singleton σ
  | false, σ => memC_cone σ

def shapeElem (b : Bool) (σ : Str) : C.Element := C.principal (memC_shape b σ)

@[simp] theorem shapeElem_true (σ : Str) : shapeElem true σ = strElem σ := rfl

@[simp] theorem shapeElem_false (σ : Str) : shapeElem false σ = strBot σ := rfl

def SLe : Bool → Str → Bool → Str → Prop
  | true, σ, b', σ' => b' = true ∧ σ = σ'
  | false, σ, _, σ' => σ <+: σ'

def mergeVal : Str → Bool → Str → Bool → Str × Bool
  | [], b₀, _, _ => ([], b₀)
  | a :: _, _, [], _ => ([a], false)
  | a :: σ, b₀, b :: τ, b₁ => (a :: b :: (mergeVal σ b₀ τ b₁).1, (mergeVal σ b₀ τ b₁).2)

@[simp] theorem mergeVal_nil (b₀ : Bool) (τ : Str) (b₁ : Bool) :
    mergeVal [] b₀ τ b₁ = ([], b₀) := rfl
```

```
@[simp] theorem mergeVal_cons_nil (a : Bool) (σ : Str) (b₀ b₁ : Bool) :
    mergeVal (a :: σ) b₀ [] b₁ = ([a], false) := rfl

@[simp] theorem mergeVal_cons_cons (a : Bool) (σ : Str) (b₀ b : Bool) (τ : Str) (b₁ :
    Bool) :
    mergeVal (a :: σ) b₀ (b :: τ) b₁ =
      (a :: b :: (mergeVal σ b₀ τ b₁).1, (mergeVal σ b₀ τ b₁).2) := rfl

theorem SLe_cons2 {p p' : Bool} {? ?' : Str} (c d : Bool) (h : SLe p ? p' ?') :
    SLe p (c :: d :: ?) p' (c :: d :: ?') := by
  cases p with
  | true => obtain ⟨rfl, rfl⟩ := h; exact ⟨rfl, rfl⟩
  | false =>
    exact List.cons_prefix_cons.mpr ⟨rfl, List.cons_prefix_cons.mpr ⟨rfl, h⟩⟩

theorem SLe_cons_inv {b₀ b₀' : Bool} {a : Bool} {σ₀ σ' : Str} (h : SLe b₀ (a :: σ₀) b₀'
    σ') :
    ∃ σ₀', σ' = a :: σ₀' ∧ SLe b₀ σ₀ b₀' σ₀' := by
  cases b₀ with
  | true =>
    obtain ⟨rfl, rfl⟩ := h
    exact ⟨σ₀, rfl, rfl, rfl⟩
  | false =>
    cases σ' with
    | nil => exact absurd h (by simp [SLe])
    | cons a' σ₀' =>
      obtain ⟨rfl, h'⟩ := List.cons_prefix_cons.mp h
      exact ⟨σ₀', rfl, h'⟩

def mergeElem (σ : Str) (b₀ : Bool) (τ : Str) (b₁ : Bool) : C.Element :=
  shapeElem (mergeVal σ b₀ τ b₁).2 (mergeVal σ b₀ τ b₁).1

theorem mergeVal_SLe : ∀ (σ : Str) (b₀ : Bool) (σ' : Str) (b₀' : Bool)
    (τ : Str) (b₁ : Bool) (τ' : Str) (b₁' : Bool),
    SLe b₀ σ b₀' σ' → SLe b₁ τ b₁' τ' →
    SLe (mergeVal σ b₀ τ b₁).2 (mergeVal σ b₀ τ b₁).1
      (mergeVal σ' b₀' τ' b₁').2 (mergeVal σ' b₀' τ' b₁').1
  | [], b₀, σ', b₀', τ, b₁, τ', b₁', h0, _ => by
    cases b₀ with
    | true =>
      obtain ⟨rfl, rfl⟩ := h0
      simp only [mergeVal_nil]; exact ⟨rfl, rfl⟩
    | false =>
      simp only [mergeVal_nil]; exact List.nil_prefix
  | a :: σ₀, b₀, σ', b₀', [], b₁, τ', b₁', h0, _ => by
    obtain ⟨σ₀', rfl, _⟩ := SLe_cons_inv h0
    simp only [mergeVal_cons_nil]
    cases τ' with
    | nil => simp only [mergeVal_cons_nil]; exact List.prefix_rfl
    | cons c τ₀' => simp only [mergeVal_cons_cons]; exact ⟨c :: _, rfl⟩
  | a :: σ₀, b₀, σ', b₀', b :: τ₀, b₁, τ', b₁', h0, h1 => by
    obtain ⟨σ₀', rfl, h0'⟩ := SLe_cons_inv h0
    obtain ⟨τ₀', rfl, h1'⟩ := SLe_cons_inv h1
    simp only [mergeVal_cons_cons]
    exact SLe_cons2 a b (mergeVal_SLe σ₀ b₀ σ₀' b₀' τ₀ b₁ τ₀' b₁' h0' h1')
```

```
theorem shapeElem_le_iff {b b' : Bool} {σ σ' : Str} :
    shapeElem b σ ≤ shapeElem b' σ' ↔ SLe b σ b' σ' := by
  cases b <;> cases b' <;>
    simp only [shapeElem_true, shapeElem_false, SLe, strElem_le_strElem_iff,
      strBot_le_strBot_iff, strBot_le_strElem_iff, true_and]
  · exact ⟨fun h => absurd h not_strElem_le_strBot, fun h => absurd h (by simp)⟩

theorem mergeElem_mono {σ σ' τ τ' : Str} {b₀ b₀' b₁ b₁' : Bool}
    (h0 : shapeElem b₀ σ ≤ shapeElem b₀' σ') (h1 : shapeElem b₁ τ ≤ shapeElem b₁' τ') :
    mergeElem σ b₀ τ b₁ ≤ mergeElem σ' b₀' τ' b₁' :=
  shapeElem_le_iff.mpr
    (mergeVal_SLe σ b₀ σ' b₀' τ b₁ τ' b₁' (shapeElem_le_iff.mp h0) (shapeElem_le_iff.mp
     h1))

theorem shape_injective : ∀ {b b' : Bool} {σ σ' : Str}, shape b σ = shape b' σ' → b =
    b' ∧ σ = σ'
  | true, true, σ, σ', h => ⟨rfl, by rwa [shape, shape, Set.singleton_eq_singleton_iff]
     at h⟩
  | true, false, σ, σ', h => absurd h.symm (cone_ne_singleton σ' σ)
  | false, true, σ, σ', h => absurd h (cone_ne_singleton σ σ')
  | false, false, σ, σ', h => ⟨rfl, cone_injective h⟩

theorem shape_refine {b : Bool} {σ : Str} {P : Set Str} (hP : memC P) (hsub : P ⊆
    shape b σ) :
    ∃ (b' : Bool) (σ' : Str), P = shape b' σ' ∧ shapeElem b σ ≤ shapeElem b' σ' := by
  rcases hP with ⟨?, rfl⟩ | ⟨?, rfl⟩
  · exact ⟨false, ?, rfl, (C.principal_le_iff (memC_shape b σ) (memC_shape false ?)).
    mpr hsub⟩
  · exact ⟨true, ?, rfl, (C.principal_le_iff (memC_shape b σ) (memC_shape true ?)).mpr
    hsub⟩

def mergeMap : ApproximableMap (prod C C) C where
  rel W Z := ∃ (b₀ : Bool) (σ : Str) (b₁ : Bool) (τ : Str),
    W = prodNbhd (shape b₀ σ) (shape b₁ τ) ∧ (mergeElem σ b₀ τ b₁).mem Z
  rel_dom := by
    rintro W Z ⟨b₀, σ, b₁, τ, rfl, _⟩
    exact prod_mem_prodNbhd (memC_shape b₀ σ) (memC_shape b₁ τ)
  rel_cod := by
    rintro W Z ⟨b₀, σ, b₁, τ, _, hZ⟩
    exact (mergeElem σ b₀ τ b₁).sub hZ
  master_rel := by
    refine ⟨false, [], false, [], ?_, (mergeElem [] false [] false).master_mem⟩
    show (prod C C).master = prodNbhd (shape false []) (shape false [])
    simp only [prod_master, shape, C_master, cone_nil]
  inter_right := by
    rintro W Z Z' ⟨b₀, σ, b₁, τ, rfl, hZ⟩ ⟨b₀', σ', b₁', τ', heq, hZ'⟩
    obtain ⟨hX, hY⟩ := prodNbhd_injective heq
    obtain ⟨rfl, rfl⟩ := shape_injective hX
    obtain ⟨rfl, rfl⟩ := shape_injective hY
    exact ⟨b₀, σ, b₁, τ, rfl, (mergeElem σ b₀ τ b₁).inter_mem hZ hZ'⟩
  mono := by
    rintro W W₂ Z Z' ⟨b₀, σ, b₁, τ, rfl, hZ⟩ hW₂W hZZ' hW₂ hZ'
    obtain ⟨P, Q, hP, hQ, rfl⟩ := hW₂
    obtain ⟨hPsub, hQsub⟩ := prodNbhd_subset_iff.mp hW₂W
    obtain ⟨b₀', σ', hPeq, hle0⟩ := shape_refine hP hPsub
```

```
    obtain ⟨b₁', τ', hQeq, hle1⟩ := shape_refine hQ hQsub
    subst hPeq; subst hQeq
    refine ⟨b₀', σ', b₁', τ', rfl, ?_⟩
    have hmono := mergeElem_mono hle0 hle1
    exact (mergeElem σ' b₀' τ' b₁').up_mem (hmono Z hZ) hZ' hZZ'

@[simp] theorem consMap_shapeElem (b c : Bool) (σ : Str) :
    (consMap b).toElementMap (shapeElem c σ) = shapeElem c (b :: σ) := by
  cases c with
  | false => rw [shapeElem_false, consMap_strBot]; rfl
  | true => rw [shapeElem_true, consMap_strElem]; rfl

theorem map_ext_C {V : NeighborhoodSystem β} {f g : ApproximableMap C V}
    (hbot : ∀ σ, f.toElementMap (strBot σ) = g.toElementMap (strBot σ))
    (helem : ∀ σ, f.toElementMap (strElem σ) = g.toElementMap (strElem σ)) : f = g :=
   by
  apply eq_of_toElementMap_principal
  intro X hX
  obtain (⟨σ, rfl⟩ | ⟨σ, rfl⟩) := (C_mem.mp hX)
  · exact hbot σ
  · exact helem σ

theorem memC_eq_shape {X : Set Str} (hX : memC X) : ∃ (b : Bool) (σ : Str), X = shape b
    σ := by
  rcases hX with ⟨σ, rfl⟩ | ⟨σ, rfl⟩
  · exact ⟨false, σ, rfl⟩
  · exact ⟨true, σ, rfl⟩

theorem mergeMap_pair (b₀ : Bool) (σ : Str) (b₁ : Bool) (τ : Str) :
    mergeMap.toElementMap (pair (shapeElem b₀ σ) (shapeElem b₁ τ)) = mergeElem σ b₀ τ b
   ₁ := by
  apply Element.ext
  intro Z
  constructor
  · rintro ⟨W, hWmem, c₀, ?, c₁, ?, rfl, hZ⟩
    rw [mem_pair_prodNbhd] at hWmem
    obtain ⟨hmσ, hmτ⟩ := hWmem
    have hle0 : shapeElem c₀ ? ≤ shapeElem b₀ σ :=
      (C.principal_le_iff (memC_shape c₀ ?) (memC_shape b₀ σ)).mpr hmσ.2
    have hle1 : shapeElem c₁ ? ≤ shapeElem b₁ τ :=
      (C.principal_le_iff (memC_shape c₁ ?) (memC_shape b₁ τ)).mpr hmτ.2
    exact mergeElem_mono hle0 hle1 Z hZ
  · intro hZ
    refine ⟨prodNbhd (shape b₀ σ) (shape b₁ τ), ?_, b₀, σ, b₁, τ, rfl, hZ⟩
    exact mem_pair_prodNbhd.mpr ⟨⟨memC_shape b₀ σ, subset_rfl⟩, ⟨memC_shape b₁ τ,
    subset_rfl⟩⟩

theorem mergeVal_diag (s : Bool) (σ : Str) : mergeVal σ s σ s = (double σ, s) := by
  induction σ with
  | nil => rfl
  | cons a σ ih => simp [mergeVal_cons_cons, ih]

theorem mergeElem_diag (s : Bool) (σ : Str) : mergeElem σ s σ s = shapeElem s (double
    σ) := by
  simp [mergeElem, mergeVal_diag]
```

```
theorem mergeMap_diag (x : C.Element) :
    mergeMap.toElementMap (pair x x) = dMap.toElementMap x := by
  have key : mergeMap.comp (paired (idMap C) (idMap C)) = dMap := by
    apply map_ext_C
    · intro σ
      rw [toElementMap_comp, toElementMap_paired, toElementMap_idMap,
        show pair (strBot σ) (strBot σ) = pair (shapeElem false σ) (shapeElem false σ)
     from rfl,
        mergeMap_pair, mergeElem_diag, shapeElem_false, dMap_strBot]
    · intro σ
      rw [toElementMap_comp, toElementMap_paired, toElementMap_idMap,
        show pair (strElem σ) (strElem σ) = pair (shapeElem true σ) (shapeElem true σ)
     from rfl,
        mergeMap_pair, mergeElem_diag, shapeElem_true, dMap_strElem]
  have hx := congrArg (fun m : ApproximableMap C C => m.toElementMap x) key
  simp only [toElementMap_comp, toElementMap_paired, toElementMap_idMap] at hx
  exact hx

theorem negMap_comp_negMap : negMap.comp negMap = idMap C := by
  apply map_ext_C
  · intro σ
    rw [toElementMap_comp, negMap_strBot, negMap_strBot, flip_flip, toElementMap_idMap
    ]
  · intro σ
    rw [toElementMap_comp, negMap_strElem, negMap_strElem, flip_flip,
    toElementMap_idMap]

theorem negMap_negMap (x : C.Element) : negMap.toElementMap (negMap.toElementMap x) =
    x := by
  have h := negMap_comp_negMap
  rw [← toElementMap_comp, h, toElementMap_idMap]

theorem neg_cons_false : negMap.comp (consMap false) = (consMap true).comp negMap :=
    by
  apply map_ext_C
  · intro σ
    rw [toElementMap_comp, consMap_strBot, negMap_strBot, toElementMap_comp,
    negMap_strBot,
      consMap_strBot]
    rfl
  · intro σ
    rw [toElementMap_comp, consMap_strElem, negMap_strElem, toElementMap_comp,
    negMap_strElem,
      consMap_strElem]
    rfl

theorem neg_cons_true : negMap.comp (consMap true) = (consMap false).comp negMap := by
  apply map_ext_C
  · intro σ
    rw [toElementMap_comp, consMap_strBot, negMap_strBot, toElementMap_comp,
    negMap_strBot,
      consMap_strBot]
    rfl
  · intro σ
    rw [toElementMap_comp, consMap_strElem, negMap_strElem, toElementMap_comp,
    negMap_strElem,
```

```
      consMap_strElem]
    rfl

theorem prod_principal_pair (b₀ : Bool) (σ : Str) (b₁ : Bool) (τ : Str) :
    (prod C C).principal (prod_mem_prodNbhd (memC_shape b₀ σ) (memC_shape b₁ τ))
      = pair (shapeElem b₀ σ) (shapeElem b₁ τ) := by
  apply Element.ext
  intro P
  rw [mem_principal]
  constructor
  · rintro ⟨hP, hsub⟩
    obtain ⟨X', Y', hX', hY', rfl⟩ := hP
    obtain ⟨hsX, hsY⟩ := prodNbhd_subset_iff.mp hsub
    exact ⟨X', Y', ⟨hX', hsX⟩, ⟨hY', hsY⟩, rfl⟩
  · rintro ⟨X', Y', ⟨hX', hsX⟩, ⟨hY', hsY⟩, rfl⟩
    exact ⟨prod_mem_prodNbhd hX' hY', prodNbhd_subset_iff.mpr ⟨hsX, hsY⟩⟩


theorem prodMap_ext {f g : ApproximableMap (prod C C) C}
    (h : ∀ b₀ σ b₁ τ, f.toElementMap (pair (shapeElem b₀ σ) (shapeElem b₁ τ))
      = g.toElementMap (pair (shapeElem b₀ σ) (shapeElem b₁ τ))) : f = g := by
  apply eq_of_toElementMap_principal
  intro W hW
  obtain ⟨b₀, σ, b₁, τ, rfl⟩ :
      ∃ b₀ σ b₁ τ, W = prodNbhd (shape b₀ σ) (shape b₁ τ) := by
    obtain ⟨X, Y, hX, hY, rfl⟩ := hW
    obtain ⟨b₀, σ, rfl⟩ := memC_eq_shape hX
    obtain ⟨b₁, τ, rfl⟩ := memC_eq_shape hY
    exact ⟨b₀, σ, b₁, τ, rfl⟩
  have heq : (prod C C).principal hW = pair (shapeElem b₀ σ) (shapeElem b₁ τ) :=
    prod_principal_pair b₀ σ b₁ τ
  rw [heq]; exact h b₀ σ b₁ τ

theorem mergeMap_cons (? ? : Bool) (x y : C.Element) :
    mergeMap.toElementMap
        (pair ((consMap ?).toElementMap x) ((consMap ?).toElementMap y))
      = (consMap ?).toElementMap
          ((consMap ?).toElementMap (mergeMap.toElementMap (pair x y))) := by
  have key :
      mergeMap.comp (paired ((consMap ?).comp (proj₀ C C)) ((consMap ?).comp (proj₁ C C
    )))
        = ((consMap ?).comp (consMap ?)).comp mergeMap := by
    apply prodMap_ext
    intro b₀ σ b₁ τ
    simp only [toElementMap_comp, toElementMap_paired, toElementMap_proj₀,
    toElementMap_proj₁,
      fst_pair, snd_pair, consMap_shapeElem, mergeMap_pair, mergeElem,
    mergeVal_cons_cons]
  have hx := congrArg (fun m : ApproximableMap (prod C C) C => m.toElementMap (pair x
    y)) key
  simp only [toElementMap_comp, toElementMap_paired, toElementMap_proj₀,
    toElementMap_proj₁,
    fst_pair, snd_pair] at hx
  exact hx

end
```

```
section
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap ExampleB
    Example44 Exercise419
variable {β : Type*}

theorem tailMap_consMap_strBot (b : Bool) (σ : Str) :
    tailMap.toElementMap ((consMap b).toElementMap (strBot σ)) = strBot σ := by
  rw [consMap_strBot, tailMap_strBot]; rfl

theorem tailMap_consMap_strElem (b : Bool) (σ : Str) :
    tailMap.toElementMap ((consMap b).toElementMap (strElem σ)) = strElem σ := by
  rw [consMap_strElem, tailMap_strElem]; rfl

end

section
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap ExampleB
    Example44 Exercise419

def expand : Str → Str
  | [] => []
  | b :: σ => b :: (!b) :: expand σ

@[simp] theorem expand_nil : expand [] = [] := rfl

@[simp] theorem expand_cons (b : Bool) (σ : Str) : expand (b :: σ) = b :: (!b) ::
    expand σ := rfl

def tm (n : ℕ) : Bool := (Nat.bits n).foldr xor false

def tmOp : ApproximableMap C C :=
  (consMap false).comp (mergeMap.comp (paired negMap tailMap))

@[simp] theorem tm_zero : tm 0 = false := by simp [tm, Nat.zero_bits]

def tmList (n : ℕ) : Str := (List.range n).map tm

@[simp] theorem tmList_zero : tmList 0 = [] := rfl

def tElt : C.Element := tmOp.fixElement

theorem cone_univ_iff {σ : Str} : cone σ = Set.univ ↔ σ = [] := by
  constructor
  · intro h
    exact List.prefix_nil.mp (mem_cone.mp (h ▸ Set.mem_univ ([] : Str)))
  · rintro rfl; exact cone_nil

theorem expand_append (σ τ : Str) : expand (σ ++ τ) = expand σ ++ expand τ := by
  induction σ with
  | nil => rfl
  | cons b σ ih => simp [ih]

theorem iterate_expand_cons (k : ℕ) : ∃ ?, (expand^[k] [false] : Str) = false :: ? :=
    by
  induction k with
```

```
  | zero => exact ⟨[], rfl⟩
  | succ k ih =>
    obtain ⟨?, h?⟩ := ih
    exact ⟨true :: expand ?, by rw [Function.iterate_succ_apply', h?]; rfl⟩

theorem mergeVal_snd_false : ∀ (σ τ : Str) (b₁ : Bool), (mergeVal σ false τ b₁).2 =
    false
  | [], _, _ => rfl
  | _ :: _, [], _ => rfl
  | _ :: σ, _ :: τ, b₁ => by simp only [mergeVal_cons_cons]; exact mergeVal_snd_false σ
     τ b₁

theorem strBot_mem_cone {σ τ : Str} : (strBot τ).mem (cone σ) ↔ σ <+: τ := by
  rw [strBot, mem_principal]
  exact ⟨fun h => cone_subset_cone.mp h.2, fun h => ⟨memC_cone σ, cone_subset_cone.mpr
    h⟩⟩

theorem strBot_nil : strBot [] = C.bot := by
  apply Element.ext
  intro Y
  rw [strBot, mem_principal, mem_bot, cone_nil, C_master]
  exact ⟨fun h => Set.Subset.antisymm (Set.subset_univ _) h.2,
    fun h => ⟨h ▶ C.master_mem, h ▶ Set.Subset.refl _⟩⟩

theorem tElt_unfold :
    (consMap false).toElementMap
        (mergeMap.toElementMap (pair (negMap.toElementMap tElt) (tailMap.toElementMap
    tElt)))
      = tElt := by
  have h := toElementMap_fixElement tmOp
  rw [tmOp, toElementMap_comp, toElementMap_comp, toElementMap_paired] at h
  exact h

theorem tmList_length (n : ℕ) : (tmList n).length = n := by
  rw [tmList, List.length_map, List.length_range]

theorem tmList_succ (n : ℕ) : tmList (n + 1) = tmList n ++ [tm n] := by
  simp only [tmList, List.range_succ, List.map_append, List.map_cons, List.map_nil]

theorem tmList_prefix {n m : ℕ} (h : n ≤ m) : tmList n <+: tmList m := by
  induction m with
  | zero => rw [Nat.le_zero.mp h]
  | succ m ih =>
    rcases Nat.lt_succ_iff_lt_or_eq.mp (Nat.lt_succ_of_le h) with hlt | rfl
    · exact (ih (Nat.lt_succ_iff.mp hlt)).trans (by rw [tmList_succ]; exact List.
    prefix_append _ _)
    · exact List.prefix_rfl

theorem tmOp_strBot (σ : Str) :
    tmOp.toElementMap (strBot σ)
      = strBot (false :: (mergeVal (flip σ) false σ.tail false).1) := by
  unfold tmOp
  rw [toElementMap_comp, toElementMap_comp, toElementMap_paired, negMap_strBot,
    tailMap_strBot,
    show (strBot (flip σ)) = shapeElem false (flip σ) from rfl,
    show (strBot σ.tail) = shapeElem false σ.tail from rfl, mergeMap_pair, mergeElem,
```

```
    mergeVal_snd_false, shapeElem_false, consMap_strBot]

theorem tm_two_mul (n : ℕ) : tm (2 * n) = tm n := by
  rcases Nat.eq_zero_or_pos n with rfl | hn
  · rfl
  · simp only [tm, Nat.bit0_bits n (by omega : n = 0), List.foldr_cons, Bool.false_xor]

theorem tm_two_mul_add_one (n : ℕ) : tm (2 * n + 1) = !tm n := by
  simp only [tm, Nat.bit1_bits n, List.foldr_cons, Bool.true_xor]

theorem expand_tmList (m : ℕ) : expand (tmList m) = tmList (2 * m) := by
  induction m with
  | zero => rfl
  | succ m ih =>
    have key : tmList (2 * (m + 1)) = tmList (2 * m) ++ [tm m, !tm m] := by
      rw [show 2 * (m + 1) = 2 * m + 1 + 1 by ring, tmList_succ, tmList_succ,
        tm_two_mul_add_one, tm_two_mul, List.append_assoc]
      rfl
    rw [tmList_succ, expand_append, ih, key, expand_cons, expand_nil]

theorem expand_iterate_eq (k : ℕ) : (expand^[k] [false] : Str) = tmList (2 ^ k) := by
  induction k with
  | zero => rfl
  | succ k ih =>
    rw [Function.iterate_succ_apply', ih, expand_tmList, show 2 * 2 ^ k = 2 ^ (k + 1)
    by ring]

theorem weave_head : ∀ (h : Bool) (? : Str), (mergeVal (h :: flip ?) false ? false).1 =
     h :: expand ?
  | h, [] => rfl
  | h, c :: ? => by
    simp only [flip_cons, mergeVal_cons_cons, expand_cons]
    rw [weave_head (!c) ?]

theorem tmOp_strBot_expand (? : Str) :
    tmOp.toElementMap (strBot (false :: ?)) = strBot (expand (false :: ?)) := by
  rw [tmOp_strBot]
  simp only [flip_cons, List.tail_cons, expand_cons]
  rw [weave_head (!false) ?]

theorem iterElem_succ_eq (k : ℕ) :
    tmOp.iterElem (k + 1) = strBot (expand^[k] [false]) := by
  induction k with
  | zero =>
    rw [iterElem_succ, iterElem_zero, ← strBot_nil, tmOp_strBot]
    rfl
  | succ k ih =>
    obtain ⟨?, h?⟩ := iterate_expand_cons k
    rw [iterElem_succ, ih, h?, tmOp_strBot_expand, ← h?, Function.iterate_succ_apply']

end

section
open DomainTheory.NeighbourhoodSystems

def Overlap (i p : ℕ) : Prop := 1 ≤ p ∧ ∀ k, k ≤ p → tm (i + k) = tm (i + p + k)
```

```
end

section
open DomainTheory.NeighbourhoodSystems
open Example44 ExampleB NeighborhoodSystem

theorem append_three_period {α : Type*} (a : List α) (m : ℕ) (hm : m < 2 * a.length) :
    (a ++ (a ++ a))[m]? = (a ++ (a ++ a))[m + a.length]? := by
  rcases lt_or_ge m a.length with h | h
  · rw [List.getElem?_append_left h,
      List.getElem?_append_right (by omega : a.length ≤ m + a.length),
      show m + a.length - a.length = m by omega, List.getElem?_append_left h]
  · rw [List.getElem?_append_right h,
      List.getElem?_append_right (by omega : a.length ≤ m + a.length),
      show m + a.length - a.length = m by omega,
      List.getElem?_append_left (by omega : m - a.length < a.length),
      List.getElem?_append_right (by omega : a.length ≤ m)]

theorem tmList_getElem? {n j : ℕ} (h : j < n) : (tmList n)[j]? = some (tm j) := by
  rw [tmList, List.getElem?_map, List.getElem?_range h]
  rfl

end

section
open DomainTheory.NeighbourhoodSystems

theorem tm_of_eq_two_mul {x y : ℕ} (h : x = 2 * y) : tm x = tm y := by
  rw [h, tm_two_mul]

theorem tm_of_eq_two_mul_add_one {x y : ℕ} (h : x = 2 * y + 1) : tm x = !tm y := by
  rw [h, tm_two_mul_add_one]

theorem tm_two_mul_ne (x : ℕ) : tm (2 * x) = tm (2 * x + 1) := by
  rw [tm_two_mul, tm_two_mul_add_one]
  cases tm x <;> simp

theorem odd_of_consec_eq {x : ℕ} (h : tm x = tm (x + 1)) : Odd x := by
  rcases Nat.even_or_odd x with ⟨m, hm⟩ | hodd
  · exfalso; rw [hm, ← two_mul] at h; exact tm_two_mul_ne m h
  · exact hodd

theorem no_three_consec (j : ℕ) : ¬ (tm j = tm (j + 1) ∧ tm (j + 1) = tm (j + 2)) :=
    by
  rintro ⟨h1, h2⟩
  have hj : Odd j := odd_of_consec_eq h1
  have hj1 : Odd (j + 1) := odd_of_consec_eq h2
  rcases hj with ⟨a, rfl⟩
  rcases hj1 with ⟨b, hb⟩
  omega

theorem no_overlap (p : ℕ) : ∀ i, ¬ Overlap i p := by
  induction p using Nat.strong_induction_on with
  | _ p IH =>
    intro i hov
    obtain ⟨hp1, hrel⟩ := hov
```

```
obtain ⟨q, hq | hq⟩ := Nat.even_or_odd' p
·
  subst hq
  have hq1 : 1 ≤ q := by omega
  obtain ⟨a, hi | hi⟩ := Nat.even_or_odd' i
  ·
    refine IH q (by omega) a ⟨hq1, fun c hc => ?_⟩
    have hk : 2 * c ≤ 2 * q := by omega
    have := hrel (2 * c) hk
    rw [tm_of_eq_two_mul (show i + 2 * c = 2 * (a + c) by omega),
      tm_of_eq_two_mul (show i + 2 * q + 2 * c = 2 * (a + q + c) by omega)] at
this
    exact this
  ·
    refine IH q (by omega) a ⟨hq1, fun c hc => ?_⟩
    have hk : 2 * c ≤ 2 * q := by omega
    have := hrel (2 * c) hk
    rw [tm_of_eq_two_mul_add_one (show i + 2 * c = 2 * (a + c) + 1 by omega),
      tm_of_eq_two_mul_add_one (show i + 2 * q + 2 * c = 2 * (a + q + c) + 1 by
omega)] at this
    exact Bool.not_inj this
·
  subst hq
  rcases Nat.eq_zero_or_pos q with rfl | hq1
  ·
    refine no_three_consec i ⟨?_, ?_⟩
    · have := hrel 0 (by omega); simpa using this
    · have := hrel 1 (by omega); simpa [show i + 1 + 1 = i + 2 by omega] using this
  ·
    obtain ⟨a, hi | hi⟩ := Nat.even_or_odd' i
    ·
      subst hi
      have r0 := hrel 0 (by omega)
      have r1 := hrel 1 (by omega)
      have r2 := hrel 2 (by omega)
      have r3 := hrel 3 (by omega)
      rw [tm_of_eq_two_mul (show 2 * a + 0 = 2 * a by omega),
        tm_of_eq_two_mul_add_one (show 2 * a + (2 * q + 1) + 0 = 2 * (a + q) + 1
by omega)] at r0
      rw [tm_of_eq_two_mul_add_one (show 2 * a + 1 = 2 * a + 1 by omega),
        tm_of_eq_two_mul (show 2 * a + (2 * q + 1) + 1 = 2 * (a + q + 1) by omega)
] at r1
      rw [tm_of_eq_two_mul (show 2 * a + 2 = 2 * (a + 1) by omega),
        tm_of_eq_two_mul_add_one
          (show 2 * a + (2 * q + 1) + 2 = 2 * (a + q + 1) + 1 by omega)] at r2
      rw [tm_of_eq_two_mul_add_one (show 2 * a + 3 = 2 * (a + 1) + 1 by omega),
        tm_of_eq_two_mul (show 2 * a + (2 * q + 1) + 3 = 2 * (a + q + 2) by omega)
] at r3
      refine no_three_consec (a + q) ⟨?_, ?_⟩
      · revert r0 r1; cases tm a <;> cases tm (a + q) <;> cases tm (a + q + 1) <;>
          simp_all
      · revert r1 r2 r3
        cases tm (a + 1) <;> cases tm (a + q + 1) <;> cases tm (a + q + 2) <;>
cases tm a <;>
          simp_all
    ·
```

```
      subst hi
      rcases Nat.eq_or_lt_of_le hq1 with hq2 | hq2
      ·
        subst hq2
        have r0 := hrel 0 (by omega)
        have r1 := hrel 1 (by omega)
        have r2 := hrel 2 (by omega)
        have r3 := hrel 3 (by omega)
        rw [tm_of_eq_two_mul_add_one (show 2 * a + 1 + 0 = 2 * a + 1 by omega),
          tm_of_eq_two_mul (show 2 * a + 1 + (2 * 1 + 1) + 0 = 2 * (a + 2) by
    omega)] at r0
        rw [tm_of_eq_two_mul (show 2 * a + 1 + 1 = 2 * (a + 1) by omega),
          tm_of_eq_two_mul_add_one
            (show 2 * a + 1 + (2 * 1 + 1) + 1 = 2 * (a + 2) + 1 by omega)] at r1
        rw [tm_of_eq_two_mul_add_one (show 2 * a + 1 + 2 = 2 * (a + 1) + 1 by
    omega),
          tm_of_eq_two_mul (show 2 * a + 1 + (2 * 1 + 1) + 2 = 2 * (a + 3) by
    omega)] at r2
        rw [tm_of_eq_two_mul (show 2 * a + 1 + 3 = 2 * (a + 2) by omega),
          tm_of_eq_two_mul_add_one
            (show 2 * a + 1 + (2 * 1 + 1) + 3 = 2 * (a + 3) + 1 by omega)] at r3
        revert r0 r1 r2 r3
        cases tm a <;> cases tm (a + 1) <;> cases tm (a + 2) <;> cases tm (a + 3)
    <;> simp_all
      ·
        have r1 := hrel 1 (by omega)
        have r2 := hrel 2 (by omega)
        have r3 := hrel 3 (by omega)
        have r4 := hrel 4 (by omega)
        rw [tm_of_eq_two_mul (show 2 * a + 1 + 1 = 2 * (a + 1) by omega),
          tm_of_eq_two_mul_add_one
            (show 2 * a + 1 + (2 * q + 1) + 1 = 2 * (a + q + 1) + 1 by omega)] at
    r1
        rw [tm_of_eq_two_mul_add_one (show 2 * a + 1 + 2 = 2 * (a + 1) + 1 by
    omega),
          tm_of_eq_two_mul
            (show 2 * a + 1 + (2 * q + 1) + 2 = 2 * (a + q + 2) by omega)] at r2
        rw [tm_of_eq_two_mul (show 2 * a + 1 + 3 = 2 * (a + 2) by omega),
          tm_of_eq_two_mul_add_one
            (show 2 * a + 1 + (2 * q + 1) + 3 = 2 * (a + q + 2) + 1 by omega)] at
    r3
        rw [tm_of_eq_two_mul_add_one (show 2 * a + 1 + 4 = 2 * (a + 2) + 1 by
    omega),
          tm_of_eq_two_mul
            (show 2 * a + 1 + (2 * q + 1) + 4 = 2 * (a + q + 3) by omega)] at r4
        refine no_three_consec (a + q + 1) ⟨?_, ?_⟩
        · revert r1 r2; cases tm (a + 1) <;> cases tm (a + q + 1) <;> cases tm (a +
     q + 2) <;>
            simp_all
        · revert r3 r4; cases tm (a + 2) <;> cases tm (a + q + 2) <;> cases tm (a +
     q + 3) <;>
            simp_all

theorem no_cube (i p : ℕ) (hp : 1 ≤ p) :
    ¬ ∀ k, k < 2 * p → tm (i + k) = tm (i + p + k) := by
  intro hcube
```

```
  exact no_overlap p i ⟨hp, fun k hk => hcube k (by omega)⟩

end

section
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap ExampleB
    Example44 Exercise419

theorem tmList_le_tElt (n : ℕ) : strBot (tmList n) ≤ tElt := by
  have hpre : tmList n <+: expand^[n] [false] := by
    rw [expand_iterate_eq]; exact tmList_prefix (Nat.le_of_lt (Nat.lt_two_pow_self))
  calc strBot (tmList n) ≤ strBot (expand^[n] [false]) :=
        strBot_le_strBot_iff.mpr hpre
    _ = tmOp.iterElem (n + 1) := (iterElem_succ_eq n).symm
    _ ≤ tElt := iterElem_le_fixElement tmOp (n + 1)

theorem tElt_digit (n : ℕ) : strBot (tmList n ++ [tm n]) ≤ tElt := by
  have h := tmList_le_tElt (n + 1)
  rwa [tmList_succ] at h

theorem tElt_mem_cone_iff (σ : Str) : tElt.mem (cone σ) ↔ σ = tmList σ.length := by
  constructor
  · intro hσ
    rw [show tElt = tmOp.fixElement from rfl, tmOp.fixElement_eq_iSupDirected,
      mem_iSupDirected] at hσ
    obtain ⟨n, hn⟩ := hσ

    obtain ⟨N, hpre⟩ : ∃ N, σ <+: tmList N := by
      cases n with
      | zero =>
        rw [iterElem_zero, mem_bot, C_master, cone_univ_iff] at hn
        exact ⟨0, by rw [hn]; exact List.nil_prefix⟩
      | succ k =>
        rw [iterElem_succ_eq, strBot_mem_cone, expand_iterate_eq] at hn
        exact ⟨2 ^ k, hn⟩

    have hlen : σ.length ≤ N := hpre.length_le.trans_eq (tmList_length _)
    have h1 : σ = (tmList N).take σ.length := List.prefix_iff_eq_take.mp hpre
    have h2 : tmList σ.length = (tmList N).take σ.length := by
      have := List.prefix_iff_eq_take.mp (tmList_prefix hlen)
      rwa [tmList_length] at this
    exact h1.trans h2.symm
  · intro hσ
    have h := tmList_le_tElt σ.length
    have hmem : (strBot (tmList σ.length)).mem (cone σ) :=
      strBot_mem_cone.mpr (hσ ▸ List.prefix_rfl)
    exact h _ hmem

end

section
open DomainTheory.NeighbourhoodSystems
open Example44 ExampleB NeighborhoodSystem

theorem tElt_cube_free (u a : Str) (ha : a = []) :
    ¬ strBot (u ++ a ++ a ++ a) ≤ tElt := by
```

```
  intro hle

  have hmem : tElt.mem (cone (u ++ a ++ a ++ a)) :=
    hle _ (strBot_mem_cone.mpr List.prefix_rfl)

  have heq : u ++ a ++ a ++ a = tmList (u ++ a ++ a ++ a).length :=
    (tElt_mem_cone_iff _).mp hmem

  set N := (u ++ a ++ a ++ a).length with hN
  have hlen : N = u.length + 3 * a.length := by simp only [hN, List.length_append];
    omega
  have hp : 1 ≤ a.length := by
    cases a with
    | nil => exact (ha rfl).elim
    | cons _ _ => simp
  refine no_cube u.length a.length hp (fun k hk => ?_)

  have hk3 : u.length + k < N := by omega
  have hk3' : u.length + a.length + k < N := by omega
  have e1 : (tmList N)[u.length + k]? = some (tm (u.length + k)) := tmList_getElem?
    hk3
  have e2 : (tmList N)[u.length + a.length + k]? = some (tm (u.length + a.length + k))
     :=
    tmList_getElem? hk3'

  have hassoc : u ++ a ++ a ++ a = u ++ (a ++ (a ++ a)) := by
    simp [List.append_assoc]
  rw [← heq, hassoc] at e1 e2
  rw [List.getElem?_append_right (by omega : u.length ≤ u.length + k),
    show u.length + k - u.length = k by omega] at e1
  rw [List.getElem?_append_right (by omega : u.length ≤ u.length + a.length + k),
    show u.length + a.length + k - u.length = k + a.length by omega] at e2

  have hper := append_three_period a k (by omega)
  have : some (tm (u.length + k)) = some (tm (u.length + a.length + k)) := by
    rw [← e1, hper, e2]
  exact Option.some.inj this
end

end DomainTheory.NeighbourhoodSystems.Exercise516
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

section
variable {α : Type*} {V : NeighborhoodSystem α}

namespace ApproximableMap

def pfix (τ : ApproximableMap (prod V V) V) : ApproximableMap V V :=
  (fixMap V).comp (curry τ)

def recOp (τ : ApproximableMap (prod V V) V) : ApproximableMap (funSpace V V) (funSpace
    V V) :=
  curry (τ.comp (paired (proj₁ (funSpace V V) V) (evalMap V V)))

def section₂ (τ : ApproximableMap (prod V V) V) (x : V.Element) : ApproximableMap V V
```

```
    :=
  toApproxMap ((curry τ).toElementMap x)

theorem pfix_apply (τ : ApproximableMap (prod V V) V) (x : V.Element) :
    (pfix τ).toElementMap x = (section₂ τ x).fixElement := by
  rw [pfix, toElementMap_comp, fixMap_toElementMap, section₂]

theorem recOp_apply (τ : ApproximableMap (prod V V) V) (φ : (funSpace V V).Element) (x
     : V.Element) :
    (toApproxMap ((recOp τ).toElementMap φ)).toElementMap x
      = τ.toElementMap (pair x ((toApproxMap φ).toElementMap x)) := by
  rw [recOp, toElementMap_curry_apply, toElementMap_comp, toElementMap_paired,
    toElementMap_proj₁, snd_pair, evalMap_apply]

theorem section₂_apply (τ : ApproximableMap (prod V V) V) (x y : V.Element) :
    (section₂ τ x).toElementMap y = τ.toElementMap (pair x y) := by
  rw [section₂, toElementMap_curry_apply]

theorem pfix_isFixed (τ : ApproximableMap (prod V V) V) (x : V.Element) :
    τ.toElementMap (pair x ((pfix τ).toElementMap x)) = (pfix τ).toElementMap x := by
  rw [pfix_apply, ← section₂_apply, toElementMap_fixElement]

end ApproximableMap
end
end DomainTheory.NeighbourhoodSystems
end
```

3.7 Domain equations

Dependency diagram. Each box is one item. The arrowhead is on the item that imports. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it is not shown. Blue is a definition, green a proposition or lemma, amber an example, red a theorem, and indigo an exercise.

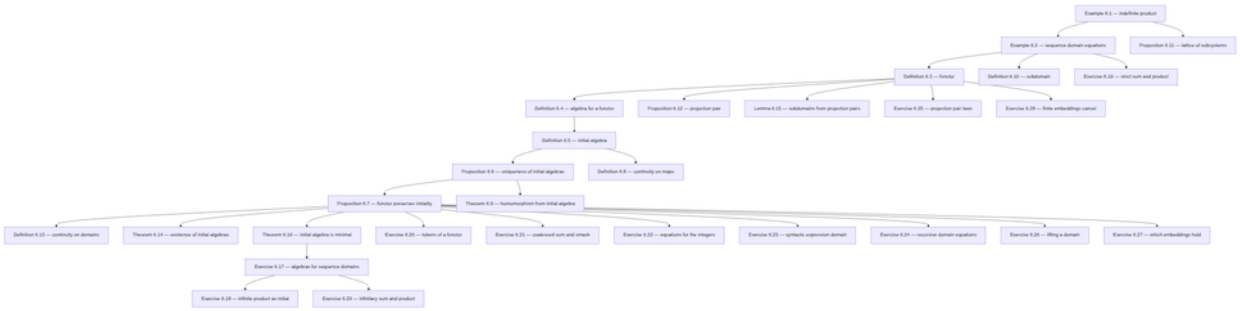

Figure 44: Domain equations.

3.7.1 Introduction

LECTURE VI INTRODUCTION TO DOMAIN EQUATIONS

The major reason for introducing the theory of domains is to have a notion of *computability* incorporating both finite and infinite elements. In our many examples already explored we have seen how functions (functionals, operators, combinators) can be defined on domains; owing to the property of *approximability*

(continuity) of these functions, we have also seen how they can be "calculated" by finite approximation. In this lecture further examples of domains will be constructed – especially domains having infinite elements, which can be introduced in a variety of ways giving rise to interesting structural possibilities. The next lecture then treats a precise notion of *computability* appropriate to these domains; while the last lecture opens up new methods of domain construction.

3.7.2 Example 6.1 — indefinite product

Example_6_1.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Definition_6_10

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_18
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Examples_1_2_1_5_revisited

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem
namespace Example61
variable {α : Type*}

inductive MemS (D : NeighborhoodSystem α) : Set (List Bool × α) → Prop
  | gamma : MemS D (Gamma D)
  | zero {X : Set α} : D.mem X → MemS D (embZero X)
  | pair {P Q : Set (List Bool × α)} : MemS D P → MemS D Q → MemS D (embPair P Q)

end Example61
end

section
open NeighborhoodSystem ApproximableMap ExampleB

namespace Example62

def embBit (b : Bool) (X : Set Str) : Set Str := {w | ∃ w', w = b :: w' ∧ w' ∈ X}

@[simp] theorem mem_embBit {b : Bool} {X : Set Str} {w : Str} :
    w ∈ embBit b X ↔ ∃ w', w = b :: w' ∧ w' ∈ X := Iff.rfl

theorem B_nonempty : ∀ X, B.mem X → X.Nonempty := by
  rintro X ⟨σ, rfl⟩; exact ⟨σ, List.prefix_rfl⟩

abbrev BB : NeighborhoodSystem (Option (Str ? Str)) := sum B B B_nonempty B_nonempty

theorem embBit_eq_prepend (b : Bool) (X : Set Str) : embBit b X = prepend [b] X := by
  ext w
  simp only [mem_embBit, mem_prepend]
  constructor
```

```
  · rintro ⟨w', rfl, hX⟩; exact ⟨w', hX, rfl⟩
  · rintro ⟨τ, hX, rfl⟩; exact ⟨τ, rfl, hX⟩

theorem embBit_cone (b : Bool) (σ : Str) : embBit b (cone σ) = cone (b :: σ) := by
  rw [embBit_eq_prepend, prepend_cone]; rfl

theorem embBit_inter (b : Bool) (X X' : Set Str) :
    embBit b X ∩ embBit b X' = embBit b (X ∩ X') := by
  ext w
  simp only [Set.mem_inter_iff, mem_embBit]
  constructor
  · rintro ⟨⟨w', rfl, hX⟩, w'', heq, hX'⟩
    rw [List.cons.injEq] at heq
    obtain ⟨-, rfl⟩ := heq
    exact ⟨w', rfl, hX, hX'⟩
  · rintro ⟨w', rfl, hX, hX'⟩
    exact ⟨⟨w', rfl, hX⟩, ⟨w', rfl, hX'⟩⟩

theorem embBit_inter_ne {b b' : Bool} (h : b = b') (X Y : Set Str) :
    embBit b X ∩ embBit b' Y = ∅ := by
  ext w
  simp only [Set.mem_inter_iff, mem_embBit, Set.mem_empty_iff_false, iff_false,
    not_and]
  rintro ⟨w', rfl, -⟩ ⟨w'', heq, -⟩
  rw [List.cons.injEq] at heq
  exact h heq.1

theorem embBit_ne {b b' : Bool} (h : b = b') {X Y : Set Str} (hX : X.Nonempty) :
    embBit b X = embBit b' Y := by
  intro heq
  obtain ⟨w', hw'⟩ := hX
  have hmem : (b :: w') ∈ embBit b' Y := heq ▸ (⟨w', rfl, hw'⟩ : (b :: w') ∈ embBit b X
    )
  obtain ⟨w'', he, -⟩ := hmem
  rw [List.cons.injEq] at he
  exact h he.1

theorem embBit_subset {b : Bool} {X X' : Set Str} :
    embBit b X ⊆ embBit b X' ↔ X ⊆ X' := by
  constructor
  · intro h w' hw'
    obtain ⟨w'', heq, hX'⟩ := h ⟨w', rfl, hw'⟩
    rw [List.cons.injEq] at heq
    obtain ⟨-, rfl⟩ := heq
    exact hX'
  · rintro h w ⟨w', rfl, hX⟩
    exact ⟨w', rfl, h hX⟩

theorem embBit_injective {b : Bool} {X X' : Set Str} (h : embBit b X = embBit b X') :
    X = X' :=
  Set.Subset.antisymm (embBit_subset.mp h.subset) (embBit_subset.mp h.symm.subset)

end Example62
end
end DomainTheory.NeighbourhoodSystems
end
```

EXAMPLE 6.1. Let D be fixed as a given domain. We are now familiar with a useful construct like $D \times D$ whose elements are ordered pairs $\langle x, y\rangle$ of elements x, y of D. The question is: can this construct be iterated? The answer is obviously yes, since $D \times (D \times D)$ and $(D \times D) \times (D \times D)$ and so on can be formed with elements $\langle x, \langle y, z\rangle\rangle$ and $\langle\langle u, v\rangle, \langle x, y\rangle\rangle$ and the like. But the real question is: can the construct be iterated *indefinitely*? AND can the results be collected together into a *single* domain? The answer is yes, but it requires a bit of work to get it right. The method to be introduced will be open to many variations, so more than one answer is possible, giving non-isomorphic domains.

In order to collect all the iterates into one large domain we give ourselves first a very big domain inside of which the desired family of neighbourhoods will be found. There are many ways to make this choice, and we are fixing on one that will keep the notation simple. We have often used binary sequences for examples and constructions, but for this example let us use

ternary sequences. Let $\Sigma = \{0, 1, 2\}$ and let Σ^* be all finite sequences from this three-letter alphabet. We will select subsets of Σ^* for our neighbourhoods. As Σ^* is countably infinite, it is without much loss of generality to assume that $\mathcal{D}$ is a neighbourhood system over Δ, where we take $\Delta \subseteq \Sigma^*$. Also without loss of generality we can assume $\emptyset \notin \mathcal{D}$. (Why?)

We wish to find another set $\Gamma \subseteq \Sigma^*$ to be the set of tokens for the new domain. After we find it, we will still have to say just which $X \subseteq \Gamma$ are appropriate for the structure we want.

The totality $\{X \mid X \subseteq \Sigma^*\}$ is, as a powerset, isomorphic to the set of elements of a domain: a point we have remarked several times. So, by the Fixed-Point Theorem we know there is a set $\Gamma \subseteq \Sigma^*$ where

$$\Gamma = 0\Delta \cup 1\Gamma \cup 2\Gamma.$$

In fact $\Gamma = \{1, 2\}^*0\Delta$, because we can say:

$$\{1, 2\}^* = \{\Lambda\} \cup 1\{1, 2\}^* \cup 2\{1, 2\}^*.$$

The domain we are looking for will be found as a domain $\mathcal{D}^\S$ over Γ. The reason for splitting Γ up, as shown in the equation above, is to ensure that if $X, Y \in \mathcal{D}^\S$ are two neighbourhoods in the system $\mathcal{D}^\S$, then $1X \cup 2Y$ has a chance of being also in $\mathcal{D}^\S$ because

$$1X \cup 2Y \subseteq \Gamma.$$

This will make $\mathcal{D}^\S \times \mathcal{D}^\S$ isomorphic to a part of $\mathcal{D}^\S$. If we make $\mathcal{D}$ also isomorphic to a part of $\mathcal{D}^\S$, then all the iterated products will be contained in $\mathcal{D}^\S$.

What is a neighbourhood system? Just a set of sets. But $\mathcal{PP}\Sigma^*$ is a domain (as a power set) and because $\Gamma \subseteq \Sigma^*$, we find

$$\mathcal{D}^\S \in \mathcal{PP}\Sigma^*$$

as an element. But elements of domains can often be defined by fixed-point equations. Indeed we will introduce $\mathcal{D}^\S$ this way:

$$\mathcal{D}^\S = \{\Gamma\} \cup \{0X \mid X \in \mathcal{D}\} \cup \{1X \cup 2Y \mid X, Y \in \mathcal{D}^\S\}.$$

The reader should stop to think why $\mathcal{D}^\S$ can be immediately seen to exist by writing such an equation. Of course another way to describe $\mathcal{D}^\S$ is to say it is the least family of sets containing (i) the set Γ, (ii) the sets $0X$ for X in the given system $\mathcal{D}$, and (iii) sets $1X \cup 2Y$ whenever it already contains X and Y (closure

under a set-forming operation). By saying "least" we mean (iv) nothing else belongs to $\mathcal{D}^\S$ except as allowed by (i)–(iii); this makes the truth of the equation for $\mathcal{D}^\S$ clear. So $\mathcal{D}^\S$ exists as a family of sets, but what good is it?

By our construction of Γ, all the sets we put into $\mathcal{D}^\S$ are subsets of Γ (why?); so $\mathcal{D}^\S$ has a chance of being a system over Γ if we can check the closure under intersection. So suppose $Z \subseteq X \cap Y$ where $Z, X, Y \in \mathcal{D}^\S$; we want to show $X \cap Y \in \mathcal{D}^\S$. We argue by induction on the number of steps required to put X and Y into $\mathcal{D}^\S$ by (i)–(iii). There are several cases.

If $X = \Gamma$ or $Y = \Gamma$, there is nothing to prove, because both sets are subsets of Γ. We note that $\emptyset \notin \mathcal{D}^\S$, because (i)–(iii) cannot introduce $\emptyset$ as a member of $\mathcal{D}^\S$. So, if $X = 0A$ for $A \in \mathcal{D}$, then Y must have this form also (if it is not Γ), because

$$0A \cap (1B \cup 2C) = \emptyset.$$

(That is, if Y had the form (iii), then $Z = \emptyset$ would be a consequence, which is impossible.) Thus, if $X = 0A$ for $A \in \mathcal{D}$, then $Y = 0B$ for some $B \in \mathcal{D}$. But by the same reasoning $Z = 0C$ for some $C \in \mathcal{D}$ also. But the relationship $0C \subseteq 0A \cap 0B$ is equivalent to $C \subseteq A \cap B$. We see, therefore, that $A \cap B \in \mathcal{D}$, and so

$$X \cap Y = 0A \cap 0B = 0(A \cap B)$$

must belong to $\mathcal{D}^\S$.

The final case has X, Y, Z all of the form (iii):

$$X = 1A_1 \cup 2A_2,$$

$$Y = 1B_1 \cup 2B_2, \text{ and}$$

$$Z = 1C_1 \cup 2C_2.$$

We can think of the A_i and B_i put into $\mathcal{D}^\S$ earlier and the intersection result as being already established for them. But the relationship $Z \subseteq X \cap Y$ is equivalent to $C_i \subseteq A_i \cap B_i$ for $i = 1, 2$. Therefore $A_i \cap B_i \in \mathcal{D}^\S$, and so does

$$X \cap Y = (1A_1 \cup 2A_2) \cap (1B_1 \cup 2B_2) = 1(A_1 \cap B_1) \cup 2(A_2 \cap B_2).$$

We have now seen that $D^\S$ is a neighbourhood system, but why was it constructed that way? The reason is simply this isomorphism (or domain equation):

$$D^\S \cong D + (D^\S \times D^\S),$$

as can be seen by reference to the equation for $D^\S$ and the definitions of $+$ and $\times$. What are the elements of $D^\S$? There is always

$$\bot = \{\Gamma\}.$$

Next if $x \in |D|$ we define

$$x^\S = \{\Gamma\} \cup \{0X \mid X \in x\}.$$

That gives an isomorphic injection

$$\lambda x.\, x^{\S} : D \to D^{\S}.$$

Then for $x, y \in |D^{\S}|$ we can define

$$\langle x, y\rangle = \{\Gamma\} \cup \{1X \cup 2Y \mid X \in x \text{ and } Y \in y\}.$$

We have another isomorphic injection

$$\lambda x, y.\, \langle x, y\rangle : D^{\S} \times D^{\S} \to D^{\S}.$$

Indeed by looking at the neighbourhood definition of $D^{\S}$ we conclude that the *finite* elements of $D^{\S}$ are exactly those that are either of the form (i) $\bot$, or (ii) $a^{\S}$, where a is finite in $|D|$, or (iii) $\langle a, b\rangle$, where a and b are previously obtained finite elements of $|D^{\S}|$.

Suppose $a, \ldots, f$ are finite in $|D|$. We can picture the element

$$u = \langle\langle a^{\S}, \langle\langle b^{\S}, c^{\S}\rangle, d^{\S}\rangle\rangle, \langle e^{\S}, f^{\S}\rangle\rangle$$

in $|D^{\S}|$ as a tree:



Note that the tree has binary branching with the elements of $|D|$ at the ends of the branches. Any such tree could be given a notation as an element of $|D^{\S}|$. The finite elements of $|D^{\S}|$ correspond exactly to such finite trees.

What of the infinite elements of $|D^{\S}|$? Are there infinite trees? Let $a, b \in |D^{\S}|$ be any elements of $|D^{\S}|$. Since pairing is an approximable mapping, we can solve the fixed-point equation

$$v = \langle a, \langle b, v\rangle\rangle.$$

In pictures we can diagram v roughly as:





The word is "roughly" here, since if a or b were not in the $|D|$ part of $|D^{\S}|$, then in the diagram the letters "a" and "b" should be replaced by the corresponding tree diagrams for a and b.

Suppose that a and b are finite. Then we can easily see that the infinite tree v is the limit of the following sequence of finite trees:

$$v_0 = \bot,$$

$$v_{n+1} = \langle a, \langle b, v_n \rangle \rangle,$$

and

$$v = \bigcup_{n=0}^{\infty} v_n.$$

The reader should think how to explain from tree diagrams the approximation relation $v_n \sqsubseteq v$ and more general such relationships.

We could call $D^{\S}$ a tree algebra over D. There may be others. A general one is a structure of the form

$$\langle E, \text{in}, \text{pair} \rangle,$$

where

$$\text{in} : D \to E, \text{ and}$$

$$\text{pair} : E \times E \to E.$$

The algebra

$$\langle D^{\S}, \lambda x.\, x^{\S}, \lambda x, y.\, \langle x, y \rangle \rangle,$$

however, is a very special one: it is "minimal" among all tree algebras over D in a sense we shall have to make precise.

To do this think of how E and $D^{\S}$ can differ. In view of the isomorphism that $D^{\S}$ satisfies, the injection of D and the pairing are one-one, so no "information" is lost by these mappings. The same may not at all be true of E, but it is reasonable to think that at least we can define an approximable mapping $g : D^{\S} \to E$ where

$$(1) \quad g(\bot) = \bot_E,$$

$$(2) \quad g(x^{\S}) = \text{in}(x), \text{ for } x \in |D|, \text{ and}$$

$$(3) \quad g(\langle x, y \rangle) = \text{pair}(g(x), g(y)), \text{ for } x, y \in |D^{\S}|.$$

By what we said earlier, g will be uniquely determined by (1)–(3), because these equations tell us exactly how to calculate g on all finite elements of $|D^{\S}|$. An approximable mapping is always determined by its action on the finite elements. But why does g exist?

It would not be too hard to give an inductive construction of g as a neighbourhood relation, but a fixed-point equation is easier to write down for the same purpose. We need, though, to have the inverse ("predecessor") functions:

$$\text{out} : D^{\S} \to D$$

$$\text{proj}_i : D^{\S} \to D^{\S}, \text{ for } i = 0, 1,$$

where

$$\text{out}(x^{\S}) = x,$$

$$\text{proj}_0(\langle x, y\rangle) = x, \text{ and}$$

$$\text{proj}_1(\langle x, y\rangle) = y.$$

We also need

$$\text{atom} : D^{\S} \to T,$$

where

$$\text{atom}(x^{\S}) = \text{true}, \text{ and}$$

$$\text{atom}(\langle x, y\rangle) = \text{false}.$$

We can then write

$$g(x) = \text{cond}\big(\text{atom}(x),\ \text{in}(\text{out}(x)),\ \text{pair}(g(\text{proj}_0(x)),\ g(\text{proj}_1(x)))\big).$$

This g exists by fixed-point theory, and it satisfies (1)–(3) by what we know about the structure of $|D^{\S}|$. As we said, g is unique because the values on finite elements are fixed.

In algebraic language g is a *homomorphism* of tree algebras; and $D^{\S}$ is called an *initial algebra*, because for any tree algebra E there is a unique homomorphism $g : D^{\S} \to E$. We note at once that any two initial algebras are isomorphic. For if D^* were another, there would exist homomorphisms in both directions between $D^{\S}$ and D^*. But the compositions of homomorphisms are again homomorphisms, and in the case of $D^{\S}$ if we go from $D^{\S}$ to D^* and back to $D^{\S}$, the result must be the identity. The reason is that the identity can be the only homomorphism of an initial algebra into itself. We thus have a precise meaning of the minimal character of $D^{\S}$. But note it still took a construction to show that the domain $D^{\S}$ exists. □

3.7.3 Example 6.2 — sequence domain equations

Example_6_2.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Example_4_4
public import Mathlib.Computability.MyhillNerode
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Example_6_1
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_15

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap ExampleB
namespace Example62

theorem memB_cases {W : Set Str} (hW : B.mem W) :
    W = Set.univ ∨ (∃ X, B.mem X ∧ W = embBit false X) ∨ (∃ Y, B.mem Y ∧ W = embBit
    true Y) := by
  obtain ⟨σ, rfl⟩ := hW
  cases σ with
  | nil => exact Or.inl cone_nil
  | cons b σ' =>
    cases b with
    | false => exact Or.inr (Or.inl ⟨cone σ', memB_cone σ', (embBit_cone false σ').symm
    ⟩)
    | true => exact Or.inr (Or.inr ⟨cone σ', memB_cone σ', (embBit_cone true σ').symm⟩)

theorem memB_embBit (b : Bool) {X : Set Str} (hX : B.mem X) : B.mem (embBit b X) := by
  rw [embBit_eq_prepend]; exact memB_prepend [b] hX

theorem memB_embBit_inv {b : Bool} {W : Set Str} (h : B.mem (embBit b W)) : B.mem W :=
     by
  obtain ⟨σ, hσ⟩ := h
  have hmem : σ ∈ embBit b W := hσ ▶ (show σ ∈ cone σ from List.prefix_rfl)
  obtain ⟨w', rfl, -⟩ := hmem
  rw [← embBit_cone] at hσ
  rw [embBit_injective hσ]
  exact memB_cone w'

theorem nil_not_mem_embBit {b : Bool} {X : Set Str} : ([] : Str) ∈ embBit b X := by
  rintro ⟨w', heq, -⟩; exact absurd heq (by simp)

theorem embBit_ne_univ (b : Bool) (X : Set Str) : embBit b X = Set.univ := by
  intro h; exact nil_not_mem_embBit (X := X) (b := b) (by rw [h]; trivial)

theorem sum_mem_inj₀_inv {X : Set Str} (h : BB.mem (inj₀ X)) : B.mem X := by
  rcases h with h0 | ⟨X', hX', heq⟩ | ⟨Y', hY', heq⟩
  · exact absurd (h0 ▶ none_mem_sumMaster) none_mem_inj₀
  · rw [inj₀_injective heq]; exact hX'
  · obtain ⟨b, hb⟩ := B_nonempty Y' hY'
    exact absurd (heq ▶ ir_mem_inj₁.mpr hb) ir_mem_inj₀
```

```
theorem sum_mem_inj₁_inv {Y : Set Str} (h : BB.mem (inj₁ Y)) : B.mem Y := by
  rcases h with h0 | ⟨X', hX', heq⟩ | ⟨Y', hY', heq⟩
  · exact absurd (h0 ▶ none_mem_sumMaster) none_mem_inj₁
  · obtain ⟨a, ha⟩ := B_nonempty X' hX'
    exact absurd (heq ▶ il_mem_inj₀.mpr ha) il_mem_inj₁
  · rw [inj₁_injective heq]; exact hY'

theorem sum_mem_nonempty {W : Set (Option (Str ? Str))} (h : BB.mem W) : W.Nonempty :=
    by
  rcases h with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
  · exact ⟨none, none_mem_sumMaster⟩
  · exact inj₀_nonempty (B_nonempty X hX)
  · exact inj₁_nonempty (B_nonempty Y hY)

def toBB (x : B.Element) : BB.Element where
  mem W := W = sumMaster B B
    ∨ (∃ X, B.mem X ∧ W = inj₀ X ∧ x.mem (embBit false X))
    ∨ (∃ Y, B.mem Y ∧ W = inj₁ Y ∧ x.mem (embBit true Y))
  sub := by
    rintro W (rfl | ⟨X, hX, rfl, -⟩ | ⟨Y, hY, rfl, -⟩)
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨X, hX, rfl⟩)
    · exact Or.inr (Or.inr ⟨Y, hY, rfl⟩)
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hzX⟩ | ⟨Y, hY, rfl, hzY⟩)
      (rfl | ⟨X', hX', rfl, hzX'⟩ | ⟨Y', hY', rfl, hzY'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr (Or.inl ⟨X', hX', by rw [sumMaster_inter_inj₀ hX'], hzX'⟩)
    · exact Or.inr (Or.inr ⟨Y', hY', by rw [sumMaster_inter_inj₁ hY'], hzY'⟩)
    · exact Or.inr (Or.inl ⟨X, hX, by rw [Set.inter_comm, sumMaster_inter_inj₀ hX], hzX⟩
    )
    · refine Or.inr (Or.inl ⟨X ∩ X', ?_, by rw [inj₀_inter], ?_⟩)
      · have hz := x.inter_mem hzX hzX'; rw [embBit_inter] at hz; exact memB_embBit_inv
     (x.sub hz)
      · have hz := x.inter_mem hzX hzX'; rwa [embBit_inter] at hz
    · exfalso
      have hz := x.inter_mem hzX hzY'
      rw [embBit_inter_ne (show (false : Bool) = true by decide)] at hz
      obtain ⟨t, ht⟩ := B_nonempty _ (x.sub hz); exact Set.notMem_empty t ht
    · exact Or.inr (Or.inr ⟨Y, hY, by rw [Set.inter_comm, sumMaster_inter_inj₁ hY], hzY⟩
    )
    · exfalso
      have hz := x.inter_mem hzY hzX'
      rw [embBit_inter_ne (show (true : Bool) = false by decide)] at hz
      obtain ⟨t, ht⟩ := B_nonempty _ (x.sub hz); exact Set.notMem_empty t ht
    · refine Or.inr (Or.inr ⟨Y ∩ Y', ?_, by rw [inj₁_inter], ?_⟩)
      · have hz := x.inter_mem hzY hzY'; rw [embBit_inter] at hz; exact memB_embBit_inv
     (x.sub hz)
      · have hz := x.inter_mem hzY hzY'; rwa [embBit_inter] at hz
  up_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hzX⟩ | ⟨Y, hY, rfl, hzY⟩) hW' hsub
    · exact Or.inl (eq_sumMaster_of_subset hW' hsub)
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
      · exact Or.inl rfl
      · refine Or.inr (Or.inl ⟨X', hX', rfl, ?_⟩)
```

```
        exact x.up_mem hzX (memB_embBit false hX') (embBit_subset.mpr (inj₀_subset_inj₀
    .mp hsub))
      · exfalso
        obtain ⟨a, ha⟩ := B_nonempty X hX
        exact absurd (hsub (il_mem_inj₀.mpr ha)) il_mem_inj₁
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
      · exact Or.inl rfl
      · exfalso
        obtain ⟨b, hb⟩ := B_nonempty Y hY
        exact absurd (hsub (ir_mem_inj₁.mpr hb)) ir_mem_inj₀
      · refine Or.inr (Or.inr ⟨Y', hY', rfl, ?_⟩)
        exact x.up_mem hzY (memB_embBit true hY') (embBit_subset.mpr (inj₁_subset_inj₁.
    mp hsub))

@[simp] theorem toBB_mem_inj₀ {x : B.Element} {X : Set Str} (hX : B.mem X) :
    (toBB x).mem (inj₀ X) ↔ x.mem (embBit false X) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hz⟩ | ⟨Y', hY', heq, hz⟩)
    · exact absurd (h0 ▶ none_mem_sumMaster) none_mem_inj₀
    · rwa [inj₀_injective heq]
    · obtain ⟨a, ha⟩ := B_nonempty X hX
      exact absurd (heq ▶ il_mem_inj₀.mpr ha) il_mem_inj₁
  · intro hz; exact Or.inr (Or.inl ⟨X, hX, rfl, hz⟩)

@[simp] theorem toBB_mem_inj₁ {x : B.Element} {Y : Set Str} (hY : B.mem Y) :
    (toBB x).mem (inj₁ Y) ↔ x.mem (embBit true Y) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hz⟩ | ⟨Y', hY', heq, hz⟩)
    · exact absurd (h0 ▶ none_mem_sumMaster) none_mem_inj₁
    · obtain ⟨a, ha⟩ := B_nonempty X' hX'
      exact absurd (heq ▶ il_mem_inj₀.mpr ha) il_mem_inj₁
    · rwa [inj₁_injective heq]
  · intro hz; exact Or.inr (Or.inr ⟨Y, hY, rfl, hz⟩)

def fromBB (s : BB.Element) : B.Element where
  mem W := W = Set.univ
    ∨ (∃ X, B.mem X ∧ W = embBit false X ∧ s.mem (inj₀ X))
    ∨ (∃ Y, B.mem Y ∧ W = embBit true Y ∧ s.mem (inj₁ Y))
  sub := by
    rintro W (rfl | ⟨X, hX, rfl, -⟩ | ⟨Y, hY, rfl, -⟩)
    · exact ⟨[], cone_nil.symm⟩
    · exact memB_embBit false hX
    · exact memB_embBit true hY
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hsX⟩ | ⟨Y, hY, rfl, hsY⟩)
      (rfl | ⟨X', hX', rfl, hsX'⟩ | ⟨Y', hY', rfl, hsY'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr (Or.inl ⟨X', hX', by rw [Set.univ_inter], hsX'⟩)
    · exact Or.inr (Or.inr ⟨Y', hY', by rw [Set.univ_inter], hsY'⟩)
    · exact Or.inr (Or.inl ⟨X, hX, by rw [Set.inter_univ], hsX⟩)
    · refine Or.inr (Or.inl ⟨X ∩ X', ?_, by rw [embBit_inter], ?_⟩)
      · have hs := s.inter_mem hsX hsX'; rw [inj₀_inter] at hs
        exact sum_mem_inj₀_inv (s.sub hs)
      · have hs := s.inter_mem hsX hsX'; rwa [inj₀_inter] at hs
    · exfalso
```

```
      have hs := s.inter_mem hsX hsY'; rw [inj₀_inter_inj₁] at hs
      obtain ⟨t, ht⟩ := sum_mem_nonempty (s.sub hs); exact Set.notMem_empty t ht
    · exact Or.inr (Or.inr ⟨Y, hY, by rw [Set.inter_univ], hsY⟩)
    · exfalso
      have hs := s.inter_mem hsY hsX'; rw [Set.inter_comm, inj₀_inter_inj₁] at hs
      obtain ⟨t, ht⟩ := sum_mem_nonempty (s.sub hs); exact Set.notMem_empty t ht
    · refine Or.inr (Or.inr ⟨Y ∩ Y', ?_, by rw [embBit_inter], ?_⟩)
      · have hs := s.inter_mem hsY hsY'; rw [inj₁_inter] at hs
        exact sum_mem_inj₁_inv (s.sub hs)
      · have hs := s.inter_mem hsY hsY'; rwa [inj₁_inter] at hs
  up_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hsX⟩ | ⟨Y, hY, rfl, hsY⟩) hW' hsub
    · exact Or.inl (Set.univ_subset_iff.mp hsub)
    · rcases memB_cases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
      · exact Or.inl rfl
      · refine Or.inr (Or.inl ⟨X', hX', rfl, ?_⟩)
        exact s.up_mem hsX (Or.inr (Or.inl ⟨X', hX', rfl⟩))
          (inj₀_subset_inj₀.mpr (embBit_subset.mp hsub))
      · exfalso
        obtain ⟨a, ha⟩ := B_nonempty X hX
        obtain ⟨w', he, -⟩ := hsub (⟨a, rfl, ha⟩ : (false :: a) ∈ embBit false X)
        rw [List.cons.injEq] at he; exact absurd he.1 (by decide)
    · rcases memB_cases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
      · exact Or.inl rfl
      · exfalso
        obtain ⟨b, hb⟩ := B_nonempty Y hY
        obtain ⟨w', he, -⟩ := hsub (⟨b, rfl, hb⟩ : (true :: b) ∈ embBit true Y)
        rw [List.cons.injEq] at he; exact absurd he.1 (by decide)
      · refine Or.inr (Or.inr ⟨Y', hY', rfl, ?_⟩)
        exact s.up_mem hsY (Or.inr (Or.inr ⟨Y', hY', rfl⟩))
          (inj₁_subset_inj₁.mpr (embBit_subset.mp hsub))

@[simp] theorem fromBB_mem_embF {s : BB.Element} {X : Set Str} (hX : B.mem X) :
    (fromBB s).mem (embBit false X) ↔ s.mem (inj₀ X) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hs⟩ | ⟨Y', hY', heq, hs⟩)
    · exact absurd h0 (embBit_ne_univ false X)
    · rwa [embBit_injective heq]
    · exact absurd heq (embBit_ne (show (false : Bool) = true by decide) (B_nonempty X
    hX))
  · intro hs; exact Or.inr (Or.inl ⟨X, hX, rfl, hs⟩)

@[simp] theorem fromBB_mem_embT {s : BB.Element} {Y : Set Str} (hY : B.mem Y) :
    (fromBB s).mem (embBit true Y) ↔ s.mem (inj₁ Y) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hs⟩ | ⟨Y', hY', heq, hs⟩)
    · exact absurd h0 (embBit_ne_univ true Y)
    · exact absurd heq.symm (embBit_ne (show (false : Bool) = true by decide) (
    B_nonempty X' hX'))
    · rwa [embBit_injective heq]
  · intro hs; exact Or.inr (Or.inr ⟨Y, hY, rfl, hs⟩)

theorem fromBB_toBB (x : B.Element) : fromBB (toBB x) = x := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
```

```
  · rintro (rfl | ⟨X, hX, rfl, hs⟩ | ⟨Y, hY, rfl, hs⟩)
    · exact x.master_mem
    · exact (toBB_mem_inj₀ hX).mp hs
    · exact (toBB_mem_inj₁ hY).mp hs
  · intro hW
    rcases memB_cases (x.sub hW) with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨X, hX, rfl, (toBB_mem_inj₀ hX).mpr hW⟩)
    · exact Or.inr (Or.inr ⟨Y, hY, rfl, (toBB_mem_inj₁ hY).mpr hW⟩)

theorem toBB_fromBB (s : BB.Element) : toBB (fromBB s) = s := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨X, hX, rfl, hs⟩ | ⟨Y, hY, rfl, hs⟩)
    · exact s.master_mem
    · exact (fromBB_mem_embF hX).mp hs
    · exact (fromBB_mem_embT hY).mp hs
  · intro hW
    rcases s.sub hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨X, hX, rfl, (fromBB_mem_embF hX).mpr hW⟩)
    · exact Or.inr (Or.inr ⟨Y, hY, rfl, (fromBB_mem_embT hY).mpr hW⟩)

def bbEquiv : B.Element ≃o BB.Element where
  toFun := toBB
  invFun := fromBB
  left_inv := fromBB_toBB
  right_inv := toBB_fromBB
  map_rel_iff' := by
    intro x x'
    constructor
    · intro h X hX
      rcases memB_cases (x.sub hX) with rfl | ⟨A, hA, rfl⟩ | ⟨A, hA, rfl⟩
      · exact x'.master_mem
      · exact (toBB_mem_inj₀ hA).mp (h _ (Or.inr (Or.inl ⟨A, hA, rfl, hX⟩)))
      · exact (toBB_mem_inj₁ hA).mp (h _ (Or.inr (Or.inr ⟨A, hA, rfl, hX⟩)))
    · intro h W hW
      rcases hW with rfl | ⟨X, hX, rfl, hzX⟩ | ⟨Y, hY, rfl, hzY⟩
      · exact Or.inl rfl
      · exact Or.inr (Or.inl ⟨X, hX, rfl, h _ hzX⟩)
      · exact Or.inr (Or.inr ⟨Y, hY, rfl, h _ hzY⟩)

theorem B_domain_equation : B ≅? sum B B B_nonempty B_nonempty :=
  ⟨bbEquiv⟩

theorem embBit_nonempty {b : Bool} {X : Set Str} (hX : X.Nonempty) : (embBit b X).
    Nonempty := by
  obtain ⟨w', hw'⟩ := hX; exact ⟨b :: w', w', rfl, hw'⟩

end Example62
end

namespace Example62A
open NeighborhoodSystem ApproximableMap ExampleB
```

```
section
variable {β : Type*} {n : ℕ}
variable {n : ℕ}

def slotPre (i : Bool) (j : ℕ) : Str := i :: (List.replicate j true ++ [false])

def embTuple (i : Bool) (X : Fin n → Set Str) : Set Str :=
  {w | ∃ j : Fin n, ∃ w', w = slotPre i (j : ℕ) ++ w' ∧ w' ∈ X j}

inductive MemA (n : ℕ) : Set Str → Prop
  | univ : MemA n Set.univ
  | tuple (i : Bool) {X : Fin n → Set Str} : (∀ j, MemA n (X j)) → MemA n (embTuple i
     X)

end

section
variable {β : Type*} {n : ℕ}

def prodN (X : Fin n → Set β) : Set (Fin n × β) := {p | p.2 ∈ X p.1}

@[simp] theorem mem_prodN {X : Fin n → Set β} {p : Fin n × β} : p ∈ prodN X ↔ p.2 ∈
    X p.1 := Iff.rfl

theorem prodN_injective {X X' : Fin n → Set β} (h : prodN X = prodN X') : ∀ j, X j = X
    ' j := by
  intro j; ext b
  have := Set.ext_iff.mp h (j, b)
  simpa only [mem_prodN] using this

theorem prodN_inter {X X' : Fin n → Set β} :
    prodN X ∩ prodN X' = prodN (fun j => X j ∩ X' j) := by
  ext p; simp only [Set.mem_inter_iff, mem_prodN]

theorem prodN_subset {X X' : Fin n → Set β} : prodN X ⊆ prodN X' ↔ ∀ j, X j ⊆ X' j
    := by
  constructor
  · intro h j b hb; exact h (show (j, b) ∈ prodN X from hb)
  · intro h p hp; exact h p.1 hp

def npow (V : NeighborhoodSystem β) (n : ℕ) (hn : 0 < n) : NeighborhoodSystem (Fin n ×
     β) where
  mem W := ∃ X : Fin n → Set β, (∀ j, V.mem (X j)) ∧ W = prodN X
  master := prodN (fun _ => V.master)
  master_nonempty := by
    obtain ⟨b, hb⟩ := V.master_nonempty
    exact ⟨((0, hn), b), hb⟩
  master_mem := ⟨_, fun _ => V.master_mem, rfl⟩
  inter_mem := by
    rintro W W' Z ⟨X, hX, rfl⟩ ⟨X', hX', rfl⟩ ⟨Zw, hZw, rfl⟩ hsub
    refine ⟨fun j => X j ∩ X' j, ?_, prodN_inter⟩
    intro j
    rw [prodN_inter] at hsub
    exact V.inter_mem (hX j) (hX' j) (hZw j) (prodN_subset.mp hsub j)
  sub_master := by
    rintro W ⟨X, hX, rfl⟩
```

```
    exact prodN_subset.mpr (fun j => V.sub_master (hX j))

@[simp] theorem npow_mem {V : NeighborhoodSystem β} {W : Set (Fin n × β)} {hn : 0 < n}
     :
    (npow V n hn).mem W ↔ ∃ X : Fin n → Set β, (∀ j, V.mem (X j)) ∧ W = prodN X :=
    Iff.rfl

end

section
variable {β : Type*} {n : ℕ}
variable {n : ℕ}

@[simp] theorem mem_embTuple {i : Bool} {X : Fin n → Set Str} {w : Str} :
    w ∈ embTuple i X ↔ ∃ j : Fin n, ∃ w', w = slotPre i (j : ℕ) ++ w' ∧ w' ∈ X j :=
    Iff.rfl

theorem embTuple_nonempty {i : Bool} {X : Fin n → Set Str} (j : Fin n) (h : (X j).
    Nonempty) :
    (embTuple i X).Nonempty := by
  obtain ⟨a, ha⟩ := h
  exact ⟨slotPre i (j : ℕ) ++ a, j, a, rfl, ha⟩

theorem memA_nonempty (hn : 0 < n) : ∀ {W}, MemA n W → W.Nonempty := by
  intro W hW
  induction hW with
  | univ => exact ⟨[], Set.mem_univ []⟩
  | tuple i hX ih => exact embTuple_nonempty ⟨0, hn⟩ (ih ⟨0, hn⟩)

theorem nil_not_mem_embTuple {i : Bool} {X : Fin n → Set Str} : ([] : Str) ∈ embTuple
    i X := by
  rintro ⟨j, a, heq, -⟩
  rw [slotPre, List.cons_append] at heq
  exact List.cons_ne_nil _ _ heq.symm

theorem embTuple_ne_univ {i : Bool} (X : Fin n → Set Str) : embTuple i X = Set.univ :=
     by
  intro h
  have : ([] : Str) ∈ embTuple i X := by rw [h]; exact Set.mem_univ []
  exact nil_not_mem_embTuple this

end

section
variable {β : Type*} {n : ℕ}

theorem npow_nonempty {V : NeighborhoodSystem β} (hn : 0 < n)
    (hV : ∀ X, V.mem X → X.Nonempty) : ∀ W, (npow V n hn).mem W → W.Nonempty := by
  rintro W ⟨X, hX, rfl⟩
  obtain ⟨b, hb⟩ := hV (X ⟨0, hn⟩) (hX ⟨0, hn⟩)
  exact ⟨(⟨0, hn⟩, b), hb⟩

theorem slot_list_inj : ∀ (j j' : ℕ) (u v : Str),
    List.replicate j true ++ false :: u = List.replicate j' true ++ false :: v → j = j
    ' ∧ u = v
  | 0, 0, u, v, h => by simpa using h
```

```
  | 0, j' + 1, u, v, h => by simp [List.replicate_succ] at h
  | j + 1, 0, u, v, h => by simp [List.replicate_succ] at h
  | j + 1, j' + 1, u, v, h => by
      rw [List.replicate_succ, List.cons_append, List.replicate_succ, List.cons_append
    ,
        List.cons.injEq] at h
      obtain ⟨hj, hu⟩ := slot_list_inj j j' u v h.2
      exact ⟨by rw [hj], hu⟩

theorem slotPre_inj {i i' : Bool} {j j' : ℕ} {u v : Str}
    (h : slotPre i j ++ u = slotPre i' j' ++ v) : i = i' ∧ j = j' ∧ u = v := by
  rw [slotPre, slotPre, List.cons_append, List.cons_append, List.cons.injEq] at h
  obtain ⟨hi, hrest⟩ := h
  rw [List.append_assoc, List.append_assoc, List.singleton_append, List.
    singleton_append] at hrest
  obtain ⟨hj, huv⟩ := slot_list_inj j j' u v hrest
  exact ⟨hi, hj, huv⟩

end

section
variable {β : Type*} {n : ℕ}
variable {n : ℕ}

theorem embTuple_inter {i : Bool} (X X' : Fin n → Set Str) :
    embTuple i X ∩ embTuple i X' = embTuple i (fun j => X j ∩ X' j) := by
  ext w
  simp only [Set.mem_inter_iff, mem_embTuple]
  constructor
  · rintro ⟨⟨j, a, rfl, ha⟩, ⟨j', a', heq, ha'⟩⟩
    obtain ⟨-, hjj, rfl⟩ := slotPre_inj heq
    obtain rfl : j = j' := Fin.ext hjj
    exact ⟨j, a, rfl, ha, ha'⟩
  · rintro ⟨j, a, rfl, ha, ha'⟩
    exact ⟨⟨j, a, rfl, ha⟩, ⟨j, a, rfl, ha'⟩⟩

theorem embTuple_inter_ne {i i' : Bool} (h : i = i') (X X' : Fin n → Set Str) :
    embTuple i X ∩ embTuple i' X' = ∅ := by
  ext w


  simp only [Set.mem_inter_iff, mem_embTuple, Set.mem_empty_iff_false, iff_false,
    not_and]
  rintro ⟨j, a, rfl, ha⟩ ⟨j', a', heq, ha'⟩
  exact h (slotPre_inj heq).1

theorem embTuple_ne {i i' : Bool} (h : i = i') {X Y : Fin n → Set Str} (j : Fin n)
    (hX : (X j).Nonempty) : embTuple i X = embTuple i' Y := by
  intro heq
  obtain ⟨a, ha⟩ := hX
  have hmem : slotPre i (j : ℕ) ++ a ∈ embTuple i' Y := heq ▸ (⟨j, a, rfl, ha⟩ : _ ∈
    embTuple i X)
  obtain ⟨j', a', he, -⟩ := hmem
  exact h (slotPre_inj he).1

theorem embTuple_subset {i : Bool} {X X' : Fin n → Set Str} :
    embTuple i X ⊆ embTuple i X' ↔ ∀ j, X j ⊆ X' j := by
```

```
  constructor
  · intro h j a ha
    obtain ⟨j', a', heq, ha'⟩ := h ⟨j, a, rfl, ha⟩
    obtain ⟨-, hjj, rfl⟩ := slotPre_inj heq
    obtain rfl : j = j' := Fin.ext hjj
    exact ha'
  · rintro h w ⟨j, a, rfl, ha⟩
    exact ⟨j, a, rfl, h j ha⟩

theorem embTuple_injective {i : Bool} {X X' : Fin n → Set Str}
    (h : embTuple i X = embTuple i X') : ∀ j, X j = X' j := by
  intro j
  exact Set.Subset.antisymm (embTuple_subset.mp h.subset j) (embTuple_subset.mp h.symm
    .subset j)

theorem memA_tuple_inv (hn : 0 < n) {i : Bool} {X : Fin n → Set Str}
    (h : MemA n (embTuple i X)) : ∀ j, MemA n (X j) := by
  generalize hW : embTuple i X = W at h
  cases h with
  | univ =>
    exfalso
    have : ([] : Str) ∈ embTuple i X := by rw [hW]; exact Set.mem_univ []
    exact nil_not_mem_embTuple this
  | @tuple i' X' hX' =>
    have hne : (embTuple i' X').Nonempty :=
      embTuple_nonempty ⟨0, hn⟩ (memA_nonempty hn (hX' ⟨0, hn⟩))
    rw [← hW] at hne
    obtain ⟨w, j, a, rfl, ha⟩ := hne
    have hmem : slotPre i (j : ℕ) ++ a ∈ embTuple i' X' := hW ▸ (⟨j, a, rfl, ha⟩ : _ ∈
     embTuple i X)
    obtain ⟨j', a', he, -⟩ := hmem
    have hii : i = i' := (slotPre_inj he).1
    subst hii
    intro k; rw [embTuple_injective hW k]; exact hX' k

theorem tag_eq_of_subset (hn : 0 < n) {i i' : Bool} {Z V : Fin n → Set Str}
    (hZ : ∀ j, MemA n (Z j)) (hsub : embTuple i Z ⊆ embTuple i' V) : i = i' := by
  obtain ⟨a, ha⟩ := memA_nonempty hn (hZ ⟨0, hn⟩)
  obtain ⟨j', v, he, -⟩ := hsub ⟨⟨0, hn⟩, a, rfl, ha⟩
  exact (slotPre_inj he).1

theorem memA_inter (hn : 0 < n) :
    ∀ {X}, MemA n X → ∀ {Y}, MemA n Y → ∀ {Z}, MemA n Z → Z ⊆ X ∩ Y → MemA n (X ∩ Y
    ) := by
  intro X hX
  induction hX with
  | univ =>
    intro Y hY Z _ _
    rw [Set.univ_inter]; exact hY
  | @tuple i X hX ih =>
    intro Y hY Z hZ hsub
    cases hY with
    | univ =>
      rw [Set.inter_univ]; exact MemA.tuple i hX
    | @tuple i' X' hX' =>
      by_cases hii : i = i'
```

```
      · rw [hii, embTuple_inter] at hsub ⊢
        cases hZ with
        | univ => exact absurd (hsub (Set.mem_univ [])) nil_not_mem_embTuple
        | @tuple i'' ZW hZW =>
          have htag : i'' = i' := tag_eq_of_subset hn hZW hsub
          rw [htag] at hsub
          have hZsub := embTuple_subset.mp hsub
          exact MemA.tuple i' (fun j => ih j (hX' j) (hZW j) (hZsub j))
      · rw [embTuple_inter_ne hii] at hsub ⊢
        exfalso
        obtain ⟨z, hz⟩ := memA_nonempty hn hZ
        exact Set.notMem_empty z (hsub hz)

def Asys (n : ℕ) (hn : 0 < n) : NeighborhoodSystem Str where
  mem := MemA n
  master := Set.univ
  master_nonempty := ⟨[], Set.mem_univ _⟩
  master_mem := MemA.univ
  inter_mem := fun hX hY hZ hsub => memA_inter hn hX hY hZ hsub
  sub_master := fun _ => Set.subset_univ _

@[simp] theorem Asys_mem {hn : 0 < n} {W : Set Str} : (Asys n hn).mem W ↔ MemA n W :=
    Iff.rfl

@[simp] theorem Asys_master {hn : 0 < n} : (Asys n hn).master = Set.univ := rfl

abbrev Apow (hn : 0 < n) : NeighborhoodSystem (Fin n × Str) := npow (Asys n hn) n hn

theorem apowNe (hn : 0 < n) : ∀ W, (Apow hn).mem W → W.Nonempty :=
  npow_nonempty hn (fun _ h => memA_nonempty hn h)

abbrev AAsys (hn : 0 < n) : NeighborhoodSystem (Option ((Fin n × Str) ? (Fin n × Str))
    ) :=
  sum (Apow hn) (Apow hn) (apowNe hn) (apowNe hn)

theorem aa_mem_inj₀_inv (hn : 0 < n) {V : Set (Fin n × Str)}
    (h : (AAsys hn).mem (inj₀ V)) : (Apow hn).mem V := by
  rcases h with h0 | ⟨X', hX', heq⟩ | ⟨Y', hY', heq⟩
  · exact absurd (h0 ▶ none_mem_sumMaster) none_mem_inj₀
  · rw [inj₀_injective heq]; exact hX'
  · obtain ⟨b, hb⟩ := apowNe hn _ hY'
    exact absurd (heq ▶ ir_mem_inj₁.mpr hb) ir_mem_inj₀

theorem aa_mem_inj₁_inv (hn : 0 < n) {V : Set (Fin n × Str)}
    (h : (AAsys hn).mem (inj₁ V)) : (Apow hn).mem V := by
  rcases h with h0 | ⟨X', hX', heq⟩ | ⟨Y', hY', heq⟩
  · exact absurd (h0 ▶ none_mem_sumMaster) none_mem_inj₁
  · obtain ⟨a, ha⟩ := apowNe hn _ hX'
    exact absurd (heq ▶ il_mem_inj₀.mpr ha) il_mem_inj₁
  · rw [inj₁_injective heq]; exact hY'

theorem aa_mem_nonempty (hn : 0 < n) {W : Set (Option ((Fin n × Str) ? (Fin n × Str)))
    }
    (h : (AAsys hn).mem W) : W.Nonempty := by
  rcases h with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
  · exact ⟨none, none_mem_sumMaster⟩
```

```
  · exact inj₀_nonempty (apowNe hn _ hX)
  · exact inj₁_nonempty (apowNe hn _ hY)

theorem apow_mem_prodN (hn : 0 < n) {X : Fin n → Set Str} (hX : ∀ j, MemA n (X j)) :
    (Apow hn).mem (prodN X) := ⟨X, hX, rfl⟩

theorem aa_mem_inj₀ (hn : 0 < n) {X : Fin n → Set Str} (hX : ∀ j, MemA n (X j)) :
    (AAsys hn).mem (inj₀ (prodN X)) := Or.inr (Or.inl ⟨prodN X, apow_mem_prodN hn hX,
    rfl⟩)

theorem aa_mem_inj₁ (hn : 0 < n) {Y : Fin n → Set Str} (hY : ∀ j, MemA n (Y j)) :
    (AAsys hn).mem (inj₁ (prodN Y)) := Or.inr (Or.inr ⟨prodN Y, apow_mem_prodN hn hY,
    rfl⟩)

theorem apow_mem_prodN_inv (hn : 0 < n) {X : Fin n → Set Str} (h : (Apow hn).mem (
    prodN X)) :
    ∀ j, MemA n (X j) := by
  obtain ⟨X', hX', heq⟩ := h
  intro j; rw [prodN_injective heq j]; exact hX' j

def toAA (hn : 0 < n) (z : (Asys n hn).Element) : (AAsys hn).Element where
  mem W := W = sumMaster (Apow hn) (Apow hn)
    ∨ (∃ X, (∀ j, MemA n (X j)) ∧ W = inj₀ (prodN X) ∧ z.mem (embTuple false X))
    ∨ (∃ Y, (∀ j, MemA n (Y j)) ∧ W = inj₁ (prodN Y) ∧ z.mem (embTuple true Y))
  sub := by
    rintro W (rfl | ⟨X, hX, rfl, -⟩ | ⟨Y, hY, rfl, -⟩)
    · exact (AAsys hn).master_mem
    · exact aa_mem_inj₀ hn hX
    · exact aa_mem_inj₁ hn hY
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hzX⟩ | ⟨Y, hY, rfl, hzY⟩)
      (rfl | ⟨X', hX', rfl, hzX'⟩ | ⟨Y', hY', rfl, hzY'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr (Or.inl ⟨X', hX', by rw [sumMaster_inter_inj₀ (apow_mem_prodN hn hX')
    ], hzX'⟩)
    · exact Or.inr (Or.inr ⟨Y', hY', by rw [sumMaster_inter_inj₁ (apow_mem_prodN hn hY')
    ], hzY'⟩)
    · exact Or.inr (Or.inl ⟨X, hX,
        by rw [Set.inter_comm, sumMaster_inter_inj₀ (apow_mem_prodN hn hX)], hzX⟩)
    · refine Or.inr (Or.inl ⟨fun j => X j ∩ X' j, ?_, by rw [inj₀_inter, prodN_inter],
    ?_⟩)
      · have hz := z.inter_mem hzX hzX'; rw [embTuple_inter] at hz
        exact memA_tuple_inv hn (z.sub hz)
      · have hz := z.inter_mem hzX hzX'; rwa [embTuple_inter] at hz
    · exfalso
      have hz := z.inter_mem hzX hzY'
      rw [embTuple_inter_ne (by decide : (false : Bool) = true)] at hz
      obtain ⟨t, ht⟩ := memA_nonempty hn (z.sub hz); exact Set.notMem_empty t ht
    · exact Or.inr (Or.inr ⟨Y, hY,
        by rw [Set.inter_comm, sumMaster_inter_inj₁ (apow_mem_prodN hn hY)], hzY⟩)
    · exfalso
      have hz := z.inter_mem hzY hzX'
      rw [embTuple_inter_ne (by decide : (true : Bool) = false)] at hz
      obtain ⟨t, ht⟩ := memA_nonempty hn (z.sub hz); exact Set.notMem_empty t ht
    · refine Or.inr (Or.inr ⟨fun j => Y j ∩ Y' j, ?_, by rw [inj₁_inter, prodN_inter],
```

```
    ?_⟩)
      · have hz := z.inter_mem hzY hzY'; rw [embTuple_inter] at hz
        exact memA_tuple_inv hn (z.sub hz)
      · have hz := z.inter_mem hzY hzY'; rwa [embTuple_inter] at hz
  up_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hzX⟩ | ⟨Y, hY, rfl, hzY⟩) hW' hsub
    · exact Or.inl (eq_sumMaster_of_subset hW' hsub)
    · rcases hW' with rfl | ⟨V', hV', rfl⟩ | ⟨V', hV', rfl⟩
      · exact Or.inl rfl
      · obtain ⟨X', hX', rfl⟩ := hV'
        refine Or.inr (Or.inl ⟨X', hX', rfl, ?_⟩)
        exact z.up_mem hzX (MemA.tuple false hX')
          (embTuple_subset.mpr (prodN_subset.mp (inj₀_subset_inj₀.mp hsub)))
      · obtain ⟨b, hb⟩ := apowNe hn (prodN X) (apow_mem_prodN hn hX)
        exact absurd (hsub (il_mem_inj₀.mpr hb)) il_mem_inj₁
    · rcases hW' with rfl | ⟨V', hV', rfl⟩ | ⟨V', hV', rfl⟩
      · exact Or.inl rfl
      · obtain ⟨b, hb⟩ := apowNe hn (prodN Y) (apow_mem_prodN hn hY)
        exact absurd (hsub (ir_mem_inj₁.mpr hb)) ir_mem_inj₀
      · obtain ⟨Y', hY', rfl⟩ := hV'
        refine Or.inr (Or.inr ⟨Y', hY', rfl, ?_⟩)
        exact z.up_mem hzY (MemA.tuple true hY')
          (embTuple_subset.mpr (prodN_subset.mp (inj₁_subset_inj₁.mp hsub)))

@[simp] theorem toAA_mem_inj₀ (hn : 0 < n) {z : (Asys n hn).Element} {X : Fin n → Set
    Str}
    (hX : ∀ j, MemA n (X j)) :
    (toAA hn z).mem (inj₀ (prodN X)) ↔ z.mem (embTuple false X) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hz⟩ | ⟨Y', hY', heq, hz⟩)
    · exact absurd (h0 ▸ none_mem_sumMaster) none_mem_inj₀
    · rw [funext (prodN_injective (inj₀_injective heq))]; exact hz
    · obtain ⟨b, hb⟩ := apowNe hn (prodN X) (apow_mem_prodN hn hX)
      exact absurd (heq ▸ il_mem_inj₀.mpr hb) il_mem_inj₁
  · intro hz; exact Or.inr (Or.inl ⟨X, hX, rfl, hz⟩)

@[simp] theorem toAA_mem_inj₁ (hn : 0 < n) {z : (Asys n hn).Element} {Y : Fin n → Set
    Str}
    (hY : ∀ j, MemA n (Y j)) :
    (toAA hn z).mem (inj₁ (prodN Y)) ↔ z.mem (embTuple true Y) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hz⟩ | ⟨Y', hY', heq, hz⟩)
    · exact absurd (h0 ▸ none_mem_sumMaster) none_mem_inj₁
    · obtain ⟨a, ha⟩ := apowNe hn (prodN X') (apow_mem_prodN hn hX')
      exact absurd (heq ▸ il_mem_inj₀.mpr ha) il_mem_inj₁
    · rw [funext (prodN_injective (inj₁_injective heq))]; exact hz
  · intro hz; exact Or.inr (Or.inr ⟨Y, hY, rfl, hz⟩)

def fromAA (hn : 0 < n) (s : (AAsys hn).Element) : (Asys n hn).Element where
  mem W := W = Set.univ
    ∨ (∃ X, (∀ j, MemA n (X j)) ∧ W = embTuple false X ∧ s.mem (inj₀ (prodN X)))
    ∨ (∃ Y, (∀ j, MemA n (Y j)) ∧ W = embTuple true Y ∧ s.mem (inj₁ (prodN Y)))
  sub := by
    rintro W (rfl | ⟨X, hX, rfl, -⟩ | ⟨Y, hY, rfl, -⟩)
    · exact MemA.univ
    · exact MemA.tuple false hX
```

```
    · exact MemA.tuple true hY
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hsX⟩ | ⟨Y, hY, rfl, hsY⟩)
      (rfl | ⟨X', hX', rfl, hsX'⟩ | ⟨Y', hY', rfl, hsY'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr (Or.inl ⟨X', hX', by rw [Set.univ_inter], hsX'⟩)
    · exact Or.inr (Or.inr ⟨Y', hY', by rw [Set.univ_inter], hsY'⟩)
    · exact Or.inr (Or.inl ⟨X, hX, by rw [Set.inter_univ], hsX⟩)
    · have hs := s.inter_mem hsX hsX'
      rw [inj₀_inter, prodN_inter] at hs
      exact Or.inr (Or.inl ⟨fun j => X j ∩ X' j,
        apow_mem_prodN_inv hn (aa_mem_inj₀_inv hn (s.sub hs)), by rw [embTuple_inter],
    hs⟩)
    · exfalso
      have hs := s.inter_mem hsX hsY'; rw [inj₀_inter_inj₁] at hs
      obtain ⟨t, ht⟩ := aa_mem_nonempty hn (s.sub hs); exact Set.notMem_empty t ht
    · exact Or.inr (Or.inr ⟨Y, hY, by rw [Set.inter_univ], hsY⟩)
    · exfalso
      have hs := s.inter_mem hsY hsX'; rw [Set.inter_comm, inj₀_inter_inj₁] at hs
      obtain ⟨t, ht⟩ := aa_mem_nonempty hn (s.sub hs); exact Set.notMem_empty t ht
    · have hs := s.inter_mem hsY hsY'
      rw [inj₁_inter, prodN_inter] at hs
      exact Or.inr (Or.inr ⟨fun j => Y j ∩ Y' j,
        apow_mem_prodN_inv hn (aa_mem_inj₁_inv hn (s.sub hs)), by rw [embTuple_inter],
    hs⟩)
  up_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hsX⟩ | ⟨Y, hY, rfl, hsY⟩) hW' hsub
    · exact Or.inl (Set.univ_subset_iff.mp hsub)
    · cases hW' with
      | univ => exact Or.inl rfl
      | @tuple i'' V hV =>
        have htag : false = i'' := tag_eq_of_subset hn hX hsub
        subst htag
        refine Or.inr (Or.inl ⟨V, hV, rfl, ?_⟩)
        exact s.up_mem hsX (aa_mem_inj₀ hn hV)
          (inj₀_subset_inj₀.mpr (prodN_subset.mpr (embTuple_subset.mp hsub)))
    · cases hW' with
      | univ => exact Or.inl rfl
      | @tuple i'' V hV =>
        have htag : true = i'' := tag_eq_of_subset hn hY hsub
        subst htag
        refine Or.inr (Or.inr ⟨V, hV, rfl, ?_⟩)
        exact s.up_mem hsY (aa_mem_inj₁ hn hV)
          (inj₁_subset_inj₁.mpr (prodN_subset.mpr (embTuple_subset.mp hsub)))

@[simp] theorem fromAA_mem_embF (hn : 0 < n) {s : (AAsys hn).Element} {X : Fin n → Set
    Str}
    (hX : ∀ j, MemA n (X j)) :
    (fromAA hn s).mem (embTuple false X) ↔ s.mem (inj₀ (prodN X)) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hs⟩ | ⟨Y', hY', heq, hs⟩)
    · exact absurd h0 (embTuple_ne_univ X)
    · rw [funext (embTuple_injective heq)]; exact hs
    · exact absurd heq
        (embTuple_ne (by decide : (false : Bool) = true) ⟨0, hn⟩ (memA_nonempty hn (hX
```

```
    ⟨0, hn⟩)))
  · intro hs; exact Or.inr (Or.inl ⟨X, hX, rfl, hs⟩)

@[simp] theorem fromAA_mem_embT (hn : 0 < n) {s : (AAsys hn).Element} {Y : Fin n → Set
     Str}
    (hY : ∀ j, MemA n (Y j)) :
    (fromAA hn s).mem (embTuple true Y) ↔ s.mem (inj₁ (prodN Y)) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hs⟩ | ⟨Y', hY', heq, hs⟩)
    · exact absurd h0 (embTuple_ne_univ Y)
    · exact absurd heq.symm
        (embTuple_ne (by decide : (false : Bool) = true) ⟨0, hn⟩ (memA_nonempty hn (hX'
     ⟨0, hn⟩)))
    · rw [funext (embTuple_injective heq)]; exact hs
  · intro hs; exact Or.inr (Or.inr ⟨Y, hY, rfl, hs⟩)

theorem fromAA_toAA (hn : 0 < n) (z : (Asys n hn).Element) : fromAA hn (toAA hn z) = z
     := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨X, hX, rfl, hs⟩ | ⟨Y, hY, rfl, hs⟩)
    · exact z.master_mem
    · exact (toAA_mem_inj₀ hn hX).mp hs
    · exact (toAA_mem_inj₁ hn hY).mp hs
  · intro hW
    cases z.sub hW with
    | univ => exact Or.inl rfl
    | @tuple i X hX =>
      cases i with
      | false => exact Or.inr (Or.inl ⟨X, hX, rfl, (toAA_mem_inj₀ hn hX).mpr hW⟩)
      | true => exact Or.inr (Or.inr ⟨X, hX, rfl, (toAA_mem_inj₁ hn hX).mpr hW⟩)

theorem toAA_fromAA (hn : 0 < n) (s : (AAsys hn).Element) : toAA hn (fromAA hn s) = s
    := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨X, hX, rfl, hs⟩ | ⟨Y, hY, rfl, hs⟩)
    · exact s.master_mem
    · exact (fromAA_mem_embF hn hX).mp hs
    · exact (fromAA_mem_embT hn hY).mp hs
  · intro hW
    rcases s.sub hW with rfl | ⟨V, hV, rfl⟩ | ⟨V, hV, rfl⟩
    · exact Or.inl rfl
    · obtain ⟨X, hX, rfl⟩ := hV
      exact Or.inr (Or.inl ⟨X, hX, rfl, (fromAA_mem_embF hn hX).mpr hW⟩)
    · obtain ⟨Y, hY, rfl⟩ := hV
      exact Or.inr (Or.inr ⟨Y, hY, rfl, (fromAA_mem_embT hn hY).mpr hW⟩)

def aaEquiv (hn : 0 < n) : (Asys n hn).Element ≃o (AAsys hn).Element where
  toFun := toAA hn
  invFun := fromAA hn
  left_inv := fromAA_toAA hn
  right_inv := toAA_fromAA hn
  map_rel_iff' := by
```

```
    intro z z'
    constructor
    · intro h W hW
      cases z.sub hW with
      | univ => exact z'.master_mem
      | @tuple i X hX =>
        cases i with
        | false => exact (toAA_mem_inj₀ hn hX).mp (h _ (Or.inr (Or.inl ⟨X, hX, rfl, hW⟩
    )))
        | true => exact (toAA_mem_inj₁ hn hX).mp (h _ (Or.inr (Or.inr ⟨X, hX, rfl, hW⟩))
    ))
    · intro h W hW
      rcases hW with rfl | ⟨X, hX, rfl, hzX⟩ | ⟨Y, hY, rfl, hzY⟩
      · exact Or.inl rfl
      · exact Or.inr (Or.inl ⟨X, hX, rfl, h _ hzX⟩)
      · exact Or.inr (Or.inr ⟨Y, hY, rfl, h _ hzY⟩)

theorem A_domain_equation (hn : 0 < n) : Asys n hn ≅? AAsys hn := ⟨aaEquiv hn⟩

end

end Example62A
open NeighborhoodSystem ApproximableMap ExampleB Example44 Example62

section

def t0 {α β ? : Type*} (a : α) : Option (α ? β ? ?) := some (Sum.inl a)
end

section

def j0 {α β ? : Type*} (X : Set α) : Set (Option (α ? β ? ?)) := {w | ∃ a, w = t0 a ∧
    a ∈ X}
end

section
variable {α β ? : Type*}

@[simp] theorem t0_mem_j0 {X : Set α} {a : α} : (t0 a : Option (α ? β ? ?)) ∈ j0 X ↔
    a ∈ X := by
  constructor
  · rintro ⟨a', heq, ha'⟩; simp only [t0, Option.some.injEq, Sum.inl.injEq] at heq;
    exact heq ▸ ha'
  · intro ha; exact ⟨a, rfl, ha⟩
end

section

def t1 {α β ? : Type*} (b : β) : Option (α ? β ? ?) := some (Sum.inr (Sum.inl b))
end

section

def j1 {α β ? : Type*} (Y : Set β) : Set (Option (α ? β ? ?)) := {w | ∃ b, w = t1 b ∧
    b ∈ Y}
end
```

```
section
variable {α β ? : Type*}

@[simp] theorem t1_mem_j1 {Y : Set β} {b : β} : (t1 b : Option (α ? β ? ?)) ∈ j1 Y ↔
    b ∈ Y := by
  constructor
  · rintro ⟨b', heq, hb'⟩
    simp only [t1, Option.some.injEq, Sum.inr.injEq, Sum.inl.injEq] at heq; exact heq
    ▶ hb'
  · intro hb; exact ⟨b, rfl, hb⟩
end

section

def t2 {α β ? : Type*} (c : ?) : Option (α ? β ? ?) := some (Sum.inr (Sum.inr c))
end

section

def j2 {α β ? : Type*} (Z : Set ?) : Set (Option (α ? β ? ?)) := {w | ∃ c, w = t2 c ∧
    c ∈ Z}
end

section
variable {α β ? : Type*}


@[simp] theorem t2_mem_j2 {Z : Set ?} {c : ?} : (t2 c : Option (α ? β ? ?)) ∈ j2 Z ↔
    c ∈ Z := by
  constructor
  · rintro ⟨c', heq, hc'⟩
    simp only [t2, Option.some.injEq, Sum.inr.injEq] at heq; exact heq ▶ hc'
  · intro hc; exact ⟨c, rfl, hc⟩

@[simp] theorem none_not_mem_j0 {X : Set α} : (none : Option (α ? β ? ?)) ∈ j0 X := by
  rintro ⟨a, heq, -⟩; exact absurd heq (by simp [t0])

@[simp] theorem none_not_mem_j1 {Y : Set β} : (none : Option (α ? β ? ?)) ∈ j1 Y := by
  rintro ⟨b, heq, -⟩; exact absurd heq (by simp [t1])

@[simp] theorem none_not_mem_j2 {Z : Set ?} : (none : Option (α ? β ? ?)) ∈ j2 Z := by
  rintro ⟨c, heq, -⟩; exact absurd heq (by simp [t2])

@[simp] theorem t1_not_mem_j0 {X : Set α} {b : β} : (t1 b : Option (α ? β ? ?)) ∈ j0 X
     := by
  rintro ⟨a, heq, -⟩; exact absurd heq (by simp [t0, t1])

@[simp] theorem t2_not_mem_j0 {X : Set α} {c : ?} : (t2 c : Option (α ? β ? ?)) ∈ j0 X
     := by
  rintro ⟨a, heq, -⟩; exact absurd heq (by simp [t0, t2])

@[simp] theorem t0_not_mem_j1 {Y : Set β} {a : α} : (t0 a : Option (α ? β ? ?)) ∈ j1 Y
     := by
  rintro ⟨b, heq, -⟩; exact absurd heq (by simp [t0, t1])
```

```
@[simp] theorem t2_not_mem_j1 {Y : Set β} {c : ?} : (t2 c : Option (α ? β ? ?)) ∈ j1 Y
     := by
  rintro ⟨b, heq, -⟩; exact absurd heq (by simp [t1, t2])

@[simp] theorem t0_not_mem_j2 {Z : Set ?} {a : α} : (t0 a : Option (α ? β ? ?)) ∈ j2 Z
     := by
  rintro ⟨c, heq, -⟩; exact absurd heq (by simp [t0, t2])

@[simp] theorem t1_not_mem_j2 {Z : Set ?} {b : β} : (t1 b : Option (α ? β ? ?)) ∈ j2 Z
     := by
  rintro ⟨c, heq, -⟩; exact absurd heq (by simp [t1, t2])

theorem j0_inter_j0 (X X' : Set α) :
    (j0 X ∩ j0 X' : Set (Option (α ? β ? ?))) = j0 (X ∩ X') := by
  ext w; rcases w with _ | (a | b | c) <;>
    simp [j0, t0, Set.mem_inter_iff]

theorem j0_inter_j1 (X : Set α) (Y : Set β) :
    (j0 X ∩ j1 Y : Set (Option (α ? β ? ?))) = ∅ := by
  ext w; rcases w with _ | (a | b | c) <;>
    simp [j0, j1, t0, t1, Set.mem_inter_iff]

theorem j0_inter_j2 (X : Set α) (Z : Set ?) :
    (j0 X ∩ j2 Z : Set (Option (α ? β ? ?))) = ∅ := by
  ext w; rcases w with _ | (a | b | c) <;>
    simp [j0, j2, t0, t2, Set.mem_inter_iff]

theorem j0_nonempty {X : Set α} (hX : X.Nonempty) : (j0 X : Set (Option (α ? β ? ?))).
    Nonempty := by
  obtain ⟨a, ha⟩ := hX; exact ⟨t0 a, a, rfl, ha⟩

theorem j0_subset_j0 {X X' : Set α} :
    (j0 X : Set (Option (α ? β ? ?))) ⊆ j0 X' ↔ X ⊆ X' := by
  constructor
  · intro h a ha; exact t0_mem_j0.mp (h (t0_mem_j0.mpr ha))
  · rintro h w ⟨a, rfl, ha⟩; exact t0_mem_j0.mpr (h ha)

theorem j1_inter_j1 (Y Y' : Set β) :
    (j1 Y ∩ j1 Y' : Set (Option (α ? β ? ?))) = j1 (Y ∩ Y') := by
  ext w; rcases w with _ | (a | b | c) <;>
    simp [j1, t1, Set.mem_inter_iff]

theorem j1_inter_j2 (Y : Set β) (Z : Set ?) :
    (j1 Y ∩ j2 Z : Set (Option (α ? β ? ?))) = ∅ := by
  ext w; rcases w with _ | (a | b | c) <;>
    simp [j1, j2, t1, t2, Set.mem_inter_iff]

theorem j1_nonempty {Y : Set β} (hY : Y.Nonempty) : (j1 Y : Set (Option (α ? β ? ?))).
    Nonempty := by
  obtain ⟨b, hb⟩ := hY; exact ⟨t1 b, b, rfl, hb⟩

theorem j1_subset_j1 {Y Y' : Set β} :
    (j1 Y : Set (Option (α ? β ? ?))) ⊆ j1 Y' ↔ Y ⊆ Y' := by
  constructor
  · intro h b hb; exact t1_mem_j1.mp (h (t1_mem_j1.mpr hb))
  · rintro h w ⟨b, rfl, hb⟩; exact t1_mem_j1.mpr (h hb)
```

```
theorem j1_injective {Y Y' : Set β}
    (h : (j1 Y : Set (Option (α ? β ? ?))) = j1 Y') : Y = Y' :=
  Set.Subset.antisymm (j1_subset_j1.mp h.subset) (j1_subset_j1.mp h.symm.subset)

theorem j2_inter_j2 (Z Z' : Set ?) :
    (j2 Z ∩ j2 Z' : Set (Option (α ? β ? ?))) = j2 (Z ∩ Z') := by
  ext w; rcases w with _ | (a | b | c) <;>
    simp [j2, t2, Set.mem_inter_iff]

theorem j2_nonempty {Z : Set ?} (hZ : Z.Nonempty) : (j2 Z : Set (Option (α ? β ? ?))).
    Nonempty := by
  obtain ⟨c, hc⟩ := hZ; exact ⟨t2 c, c, rfl, hc⟩

theorem j2_subset_j2 {Z Z' : Set ?} :
    (j2 Z : Set (Option (α ? β ? ?))) ⊆ j2 Z' ↔ Z ⊆ Z' := by
  constructor
  · intro h c hc; exact t2_mem_j2.mp (h (t2_mem_j2.mpr hc))
  · rintro h w ⟨c, rfl, hc⟩; exact t2_mem_j2.mpr (h hc)

theorem j2_injective {Z Z' : Set ?}
    (h : (j2 Z : Set (Option (α ? β ? ?))) = j2 Z') : Z = Z' :=
  Set.Subset.antisymm (j2_subset_j2.mp h.subset) (j2_subset_j2.mp h.symm.subset)

end

section
variable {α β ? : Type*}
variable (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) (V₂ :
    NeighborhoodSystem ?)

def master3 : Set (Option (α ? β ? ?)) :=
  insert none (j0 V₀.master ∪ j1 V₁.master ∪ j2 V₂.master)
end

section
variable {α β ? : Type*}
variable (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) (V₂ :
    NeighborhoodSystem ?)
variable {V₀ V₁ V₂}

@[simp] theorem none_mem_master3 : (none : Option (α ? β ? ?)) ∈ master3 V₀ V₁ V₂ :=
  Set.mem_insert _ _

namespace Example62C

theorem C_nonempty : ∀ X, C.mem X → X.Nonempty := by
  rintro X (⟨σ, rfl⟩ | ⟨σ, rfl⟩)
  · exact ⟨σ, List.prefix_rfl⟩
  · exact ⟨σ, rfl⟩

theorem embBit_singleton (b : Bool) (σ : Str) : embBit b ({σ} : Set Str) = {(b :: σ :
    Str)} := by
  rw [embBit_eq_prepend, Example44.prepend_singleton]; rfl

end Example62C
```

```
theorem eq_master3_of_subset {W : Set (Option (α ? β ? ?))}
    (hsub : master3 V₀ V₁ V₂ ⊆ W) (hsub' : W ⊆ master3 V₀ V₁ V₂) : W = master3 V₀ V₁ V₂
    :=
  Set.Subset.antisymm hsub' hsub

theorem j0_subset_master3 {X : Set α} (hX : V₀.mem X) :
    (j0 X : Set (Option (α ? β ? ?))) ⊆ master3 V₀ V₁ V₂ := by
  rintro w ⟨a, rfl, ha⟩
  exact Set.mem_insert_iff.mpr (Or.inr (Set.mem_union_left _
    (Set.mem_union_left _ (t0_mem_j0.mpr (V₀.sub_master hX ha)))))

theorem j1_subset_master3 {Y : Set β} (hY : V₁.mem Y) :
    (j1 Y : Set (Option (α ? β ? ?))) ⊆ master3 V₀ V₁ V₂ := by
  rintro w ⟨b, rfl, hb⟩
  exact Set.mem_insert_iff.mpr (Or.inr (Set.mem_union_left _
    (Set.mem_union_right _ (t1_mem_j1.mpr (V₁.sub_master hY hb)))))

theorem j2_subset_master3 {Z : Set ?} (hZ : V₂.mem Z) :
    (j2 Z : Set (Option (α ? β ? ?))) ⊆ master3 V₀ V₁ V₂ := by
  rintro w ⟨c, rfl, hc⟩
  exact Set.mem_insert_iff.mpr (Or.inr (Set.mem_union_right _ (t2_mem_j2.mpr (V₂.
    sub_master hZ hc))))

theorem master3_inter_j0 {X : Set α} (hX : V₀.mem X) :
    (master3 V₀ V₁ V₂ ∩ j0 X : Set (Option (α ? β ? ?))) = j0 X :=
  Set.inter_eq_right.mpr (j0_subset_master3 hX)

theorem master3_inter_j1 {Y : Set β} (hY : V₁.mem Y) :
    (master3 V₀ V₁ V₂ ∩ j1 Y : Set (Option (α ? β ? ?))) = j1 Y :=
  Set.inter_eq_right.mpr (j1_subset_master3 hY)

theorem master3_inter_j2 {Z : Set ?} (hZ : V₂.mem Z) :
    (master3 V₀ V₁ V₂ ∩ j2 Z : Set (Option (α ? β ? ?))) = j2 Z :=
  Set.inter_eq_right.mpr (j2_subset_master3 hZ)

namespace Example62C

theorem memC_cases {W : Set Str} (hW : C.mem W) :
    W = Set.univ ∨ W = ({[]} : Set Str)
      ∨ (∃ X, C.mem X ∧ W = embBit false X) ∨ (∃ Y, C.mem Y ∧ W = embBit true Y) := by
  rcases hW with ⟨σ, rfl⟩ | ⟨σ, rfl⟩
  · cases σ with
    | nil => exact Or.inl cone_nil
    | cons b σ' => cases b with
      | false =>
        exact Or.inr (Or.inr (Or.inl ⟨cone σ', memC_cone σ', (embBit_cone false σ').
    symm⟩))
      | true =>
        exact Or.inr (Or.inr (Or.inr ⟨cone σ', memC_cone σ', (embBit_cone true σ').symm
    ⟩))
  · cases σ with
    | nil => exact Or.inr (Or.inl rfl)
    | cons b σ' => cases b with
      | false =>
        exact Or.inr (Or.inr (Or.inl ⟨{σ'}, memC_singleton σ', (embBit_singleton false
```

```
    σ').symm⟩))
      | true =>
        exact Or.inr (Or.inr (Or.inr ⟨{σ'}, memC_singleton σ', (embBit_singleton true σ
    ').symm⟩))

theorem memC_embBit (b : Bool) {X : Set Str} (hX : C.mem X) : C.mem (embBit b X) := by
  rw [embBit_eq_prepend]; exact Example44.memC_prepend [b] hX

theorem memC_embBit_inv {b : Bool} {W : Set Str} (h : C.mem (embBit b W)) : C.mem W :=
    by
  rcases h with ⟨σ, hσ⟩ | ⟨σ, hσ⟩
  · have hmem : σ ∈ embBit b W := hσ ▶ (show σ ∈ cone σ from List.prefix_rfl)
    obtain ⟨w', rfl, -⟩ := hmem
    rw [← embBit_cone] at hσ; rw [embBit_injective hσ]; exact memC_cone w'
  · have hmem : σ ∈ embBit b W := hσ ▶ (Set.mem_singleton_iff.mpr rfl : σ ∈ ({σ} : Set
    Str))
    obtain ⟨w', rfl, -⟩ := hmem
    rw [← embBit_singleton] at hσ; rw [embBit_injective hσ]; exact memC_singleton w'

theorem singleton_nil_inter_embBit (b : Bool) (X : Set Str) :
    (({[]} : Set Str) ∩ embBit b X) = ∅ := by
  ext w
  simp only [Set.mem_inter_iff, Set.mem_singleton_iff, mem_embBit, Set.
    mem_empty_iff_false,
    iff_false, not_and]
  rintro rfl ⟨w', heq, -⟩
  exact absurd heq (by simp)

theorem singleton_nil_ne_embBit (b : Bool) (X : Set Str) : ({[]} : Set Str) = embBit b
    X := by
  intro h
  exact nil_not_mem_embBit (h ▶ (Set.mem_singleton_iff.mpr rfl : ([] : Str) ∈ ({[]} :
    Set Str)))

theorem singleton_nil_ne_univ : ({[]} : Set Str) = Set.univ := by
  intro h
  have hmem : ([true] : Str) ∈ ({[]} : Set Str) := h ▶ Set.mem_univ _
  rw [Set.mem_singleton_iff] at hmem; exact absurd hmem (by simp)

end Example62C

def sum3 (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) (V₂ :
    NeighborhoodSystem ?)
    (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty)
    (h₂ : ∀ Z, V₂.mem Z → Z.Nonempty) : NeighborhoodSystem (Option (α ? β ? ?)) where
  mem W := W = master3 V₀ V₁ V₂ ∨ (∃ X, V₀.mem X ∧ W = j0 X)
    ∨ (∃ Y, V₁.mem Y ∧ W = j1 Y) ∨ (∃ Z, V₂.mem Z ∧ W = j2 Z)
  master := master3 V₀ V₁ V₂
  master_nonempty := ⟨none, none_mem_master3⟩
  master_mem := Or.inl rfl
  sub_master := by
    rintro W (rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩ | ⟨Z, hZ, rfl⟩)
    · exact subset_rfl
    · exact j0_subset_master3 hX
    · exact j1_subset_master3 hY
    · exact j2_subset_master3 hZ
```

```
inter_mem := by
  have hne : ∀ W, (W = master3 V₀ V₁ V₂ ∨ (∃ X, V₀.mem X ∧ W = j0 X)
      ∨ (∃ Y, V₁.mem Y ∧ W = j1 Y) ∨ (∃ Z, V₂.mem Z ∧ W = j2 Z)) →
      (W : Set (Option (α ? β ? ?))).Nonempty := by
    rintro W (rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩ | ⟨Z, hZ, rfl⟩)
    · exact ⟨none, none_mem_master3⟩
    · exact j0_nonempty (h₀ X hX)
    · exact j1_nonempty (h₁ Y hY)
    · exact j2_nonempty (h₂ Z hZ)
  rintro W W' Z hW hW' hZ hZsub
  rcases hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩ | ⟨Zc, hZc, rfl⟩
  · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩ | ⟨Z', hZ', rfl⟩
    · rw [Set.inter_self]; exact Or.inl rfl
    · rw [master3_inter_j0 hX']; exact Or.inr (Or.inl ⟨X', hX', rfl⟩)
    · rw [master3_inter_j1 hY']; exact Or.inr (Or.inr (Or.inl ⟨Y', hY', rfl⟩))
    · rw [master3_inter_j2 hZ']; exact Or.inr (Or.inr (Or.inr ⟨Z', hZ', rfl⟩))
  · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩ | ⟨Z', hZ', rfl⟩
    · rw [Set.inter_comm, master3_inter_j0 hX]; exact Or.inr (Or.inl ⟨X, hX, rfl⟩)
    · rw [j0_inter_j0] at hZsub ⊢
      rcases hZ with rfl | ⟨Z0, hZ0, rfl⟩ | ⟨Z1, hZ1, rfl⟩ | ⟨Z2, hZ2, rfl⟩
      · exact absurd (hZsub none_mem_master3) (by simp)
      · exact Or.inr (Or.inl ⟨X ∩ X', V₀.inter_mem hX hX' hZ0 (j0_subset_j0.mp hZsub)
  , rfl⟩)
      · obtain ⟨b, hb⟩ := h₁ Z1 hZ1; exact absurd (hZsub (t1_mem_j1.mpr hb)) (by simp)
      · obtain ⟨c, hc⟩ := h₂ Z2 hZ2; exact absurd (hZsub (t2_mem_j2.mpr hc)) (by simp)
    · rw [j0_inter_j1] at hZsub ⊢
      obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
    · rw [j0_inter_j2] at hZsub ⊢
      obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
  · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩ | ⟨Z', hZ', rfl⟩
    · rw [Set.inter_comm, master3_inter_j1 hY]; exact Or.inr (Or.inr (Or.inl ⟨Y, hY,
  rfl⟩))
    · rw [Set.inter_comm, j0_inter_j1] at hZsub ⊢
      obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
    · rw [j1_inter_j1] at hZsub ⊢
      rcases hZ with rfl | ⟨Z0, hZ0, rfl⟩ | ⟨Z1, hZ1, rfl⟩ | ⟨Z2, hZ2, rfl⟩
      · exact absurd (hZsub none_mem_master3) (by simp)
      · obtain ⟨a, ha⟩ := h₀ Z0 hZ0; exact absurd (hZsub (t0_mem_j0.mpr ha)) (by simp)
      · exact Or.inr (Or.inr (Or.inl ⟨Y ∩ Y', V₁.inter_mem hY hY' hZ1 (j1_subset_j1.
  mp hZsub), rfl⟩))
      · obtain ⟨c, hc⟩ := h₂ Z2 hZ2; exact absurd (hZsub (t2_mem_j2.mpr hc)) (by simp)
    · rw [j1_inter_j2] at hZsub ⊢
      obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
  · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩ | ⟨Z', hZ', rfl⟩
    · rw [Set.inter_comm, master3_inter_j2 hZc]; exact Or.inr (Or.inr (Or.inr ⟨Zc,
  hZc, rfl⟩))
    · rw [Set.inter_comm, j0_inter_j2] at hZsub ⊢
      obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
    · rw [Set.inter_comm, j1_inter_j2] at hZsub ⊢
      obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
    · rw [j2_inter_j2] at hZsub ⊢
      rcases hZ with rfl | ⟨Z0, hZ0, rfl⟩ | ⟨Z1, hZ1, rfl⟩ | ⟨Z2, hZ2, rfl⟩
      · exact absurd (hZsub none_mem_master3) (by simp)
      · obtain ⟨a, ha⟩ := h₀ Z0 hZ0; exact absurd (hZsub (t0_mem_j0.mpr ha)) (by simp)
      · obtain ⟨b, hb⟩ := h₁ Z1 hZ1; exact absurd (hZsub (t1_mem_j1.mpr hb)) (by simp)
      · exact Or.inr (Or.inr (Or.inr ⟨Zc ∩ Z', V₂.inter_mem hZc hZ' hZ2 (j2_subset_j2
```

```
    .mp hZsub), rfl⟩))

namespace Example62C

theorem unitSys_nonempty : ∀ X, unitSys.mem X → X.Nonempty := by
  rintro X rfl; exact Set.univ_nonempty

abbrev CC : NeighborhoodSystem (Option (Unit ? Str ? Str)) :=
  sum3 unitSys C C unitSys_nonempty C_nonempty C_nonempty

theorem sum3_mem_j1_inv {X : Set Str} (h : CC.mem (j1 X)) : C.mem X := by
  rcases h with h0 | ⟨U, hU, heq⟩ | ⟨Y, hY, heq⟩ | ⟨Z, hZ, heq⟩
  · exact absurd (h0 ▶ none_mem_master3) none_not_mem_j1
  · obtain ⟨a, ha⟩ := unitSys_nonempty U hU; exact absurd (heq ▶ (t0_mem_j0.mpr ha))
    t0_not_mem_j1
  · rw [j1_injective heq]; exact hY
  · obtain ⟨c, hc⟩ := C_nonempty Z hZ; exact absurd (heq ▶ (t2_mem_j2.mpr hc))
    t2_not_mem_j1

theorem sum3_mem_j2_inv {Y : Set Str} (h : CC.mem (j2 Y)) : C.mem Y := by
  rcases h with h0 | ⟨U, hU, heq⟩ | ⟨Z, hZ, heq⟩ | ⟨Y', hY', heq⟩
  · exact absurd (h0 ▶ none_mem_master3) none_not_mem_j2
  · obtain ⟨a, ha⟩ := unitSys_nonempty U hU; exact absurd (heq ▶ (t0_mem_j0.mpr ha))
    t0_not_mem_j2
  · obtain ⟨c, hc⟩ := C_nonempty Z hZ; exact absurd (heq ▶ (t1_mem_j1.mpr hc))
    t1_not_mem_j2
  · rw [j2_injective heq]; exact hY'

theorem sum3_mem_nonempty {W : Set (Option (Unit ? Str ? Str))} (h : CC.mem W) : W.
    Nonempty := by
  rcases h with rfl | ⟨U, hU, rfl⟩ | ⟨Y, hY, rfl⟩ | ⟨Z, hZ, rfl⟩
  · exact ⟨none, none_mem_master3⟩
  · exact j0_nonempty (unitSys_nonempty U hU)
  · exact j1_nonempty (C_nonempty Y hY)
  · exact j2_nonempty (C_nonempty Z hZ)

def toCC (x : C.Element) : CC.Element where
  mem W := W = master3 unitSys C C
    ∨ (W = j0 (Set.univ : Set Unit) ∧ x.mem ({[]} : Set Str))
    ∨ (∃ X, C.mem X ∧ W = j1 X ∧ x.mem (embBit false X))
    ∨ (∃ Y, C.mem Y ∧ W = j2 Y ∧ x.mem (embBit true Y))
  sub := by
    rintro W (rfl | ⟨rfl, -⟩ | ⟨X, hX, rfl, -⟩ | ⟨Y, hY, rfl, -⟩)
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨Set.univ, rfl, rfl⟩)
    · exact Or.inr (Or.inr (Or.inl ⟨X, hX, rfl⟩))
    · exact Or.inr (Or.inr (Or.inr ⟨Y, hY, rfl⟩))
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨rfl, hzU⟩ | ⟨X, hX, rfl, hzF⟩ | ⟨Y, hY, rfl, hzT⟩)
      (rfl | ⟨rfl, hzU'⟩ | ⟨X', hX', rfl, hzF'⟩ | ⟨Y', hY', rfl, hzT'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr (Or.inl ⟨master3_inter_j0 rfl, hzU'⟩)
    · exact Or.inr (Or.inr (Or.inl ⟨X', hX', master3_inter_j1 hX', hzF'⟩))
    · exact Or.inr (Or.inr (Or.inr ⟨Y', hY', master3_inter_j2 hY', hzT'⟩))
    · exact Or.inr (Or.inl ⟨by rw [Set.inter_comm, master3_inter_j0 rfl], hzU⟩)
```

```
  · refine Or.inr (Or.inl ⟨?_, hzU⟩)
    rw [j0_inter_j0, Set.inter_self]
  · exfalso
    have hx := x.inter_mem hzU hzF'
    rw [singleton_nil_inter_embBit] at hx
    obtain ⟨t, ht⟩ := C_nonempty _ (x.sub hx); exact Set.notMem_empty t ht
  · exfalso
    have hx := x.inter_mem hzU hzT'
    rw [singleton_nil_inter_embBit] at hx
    obtain ⟨t, ht⟩ := C_nonempty _ (x.sub hx); exact Set.notMem_empty t ht
  · exact Or.inr (Or.inr (Or.inl ⟨X, hX, by rw [Set.inter_comm, master3_inter_j1 hX],
   hzF⟩))
  · exfalso
    have hx := x.inter_mem hzF hzU'
    rw [Set.inter_comm, singleton_nil_inter_embBit] at hx
    obtain ⟨t, ht⟩ := C_nonempty _ (x.sub hx); exact Set.notMem_empty t ht
  · refine Or.inr (Or.inr (Or.inl ⟨X ∩ X', ?_, j1_inter_j1 X X', ?_⟩))
    · have hx := x.inter_mem hzF hzF'; rw [embBit_inter] at hx; exact memC_embBit_inv
   (x.sub hx)
    · have hx := x.inter_mem hzF hzF'; rwa [embBit_inter] at hx
  · exfalso
    have hx := x.inter_mem hzF hzT'
    rw [embBit_inter_ne (show (false : Bool) = true by decide)] at hx
    obtain ⟨t, ht⟩ := C_nonempty _ (x.sub hx); exact Set.notMem_empty t ht
  · exact Or.inr (Or.inr (Or.inr ⟨Y, hY, by rw [Set.inter_comm, master3_inter_j2 hY],
   hzT⟩))
  · exfalso
    have hx := x.inter_mem hzT hzU'
    rw [Set.inter_comm, singleton_nil_inter_embBit] at hx
    obtain ⟨t, ht⟩ := C_nonempty _ (x.sub hx); exact Set.notMem_empty t ht
  · exfalso
    have hx := x.inter_mem hzT hzF'
    rw [embBit_inter_ne (show (true : Bool) = false by decide)] at hx
    obtain ⟨t, ht⟩ := C_nonempty _ (x.sub hx); exact Set.notMem_empty t ht
  · refine Or.inr (Or.inr (Or.inr ⟨Y ∩ Y', ?_, j2_inter_j2 Y Y', ?_⟩))
    · have hx := x.inter_mem hzT hzT'; rw [embBit_inter] at hx; exact memC_embBit_inv
   (x.sub hx)
    · have hx := x.inter_mem hzT hzT'; rwa [embBit_inter] at hx
up_mem := by
  rintro W W' (rfl | ⟨rfl, hzU⟩ | ⟨X, hX, rfl, hzF⟩ | ⟨Y, hY, rfl, hzT⟩) hW' hsub
  · exact Or.inl (eq_master3_of_subset hsub (CC.sub_master hW'))
  · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩ | ⟨Z', hZ', rfl⟩
    · exact Or.inl rfl
    · obtain rfl := hX'; exact Or.inr (Or.inl ⟨rfl, hzU⟩)
    · exact absurd (hsub (t0_mem_j0.mpr (Set.mem_univ ()))) t0_not_mem_j1
    · exact absurd (hsub (t0_mem_j0.mpr (Set.mem_univ ()))) t0_not_mem_j2
  · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩ | ⟨Z', hZ', rfl⟩
    · exact Or.inl rfl
    · obtain ⟨b, hb⟩ := C_nonempty X hX
      exact absurd (hsub (t1_mem_j1.mpr hb)) t1_not_mem_j0
    · refine Or.inr (Or.inr (Or.inl ⟨Y', hY', rfl, ?_⟩))
      exact x.up_mem hzF (memC_embBit false hY') (embBit_subset.mpr (j1_subset_j1.mp
   hsub))
    · obtain ⟨b, hb⟩ := C_nonempty X hX
      exact absurd (hsub (t1_mem_j1.mpr hb)) t1_not_mem_j2
  · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩ | ⟨Z', hZ', rfl⟩
```

```
      · exact Or.inl rfl
      · obtain ⟨c, hc⟩ := C_nonempty Y hY
        exact absurd (hsub (t2_mem_j2.mpr hc)) t2_not_mem_j0
      · obtain ⟨c, hc⟩ := C_nonempty Y hY
        exact absurd (hsub (t2_mem_j2.mpr hc)) t2_not_mem_j1
      · refine Or.inr (Or.inr (Or.inr ⟨Z', hZ', rfl, ?_⟩))
        exact x.up_mem hzT (memC_embBit true hZ') (embBit_subset.mpr (j2_subset_j2.mp
    hsub))

@[simp] theorem toCC_mem_j0 {x : C.Element} :
    (toCC x).mem (j0 (Set.univ : Set Unit)) ↔ x.mem ({[]} : Set Str) := by
  constructor
  · rintro (h0 | ⟨-, hz⟩ | ⟨X', hX', heq, hz⟩ | ⟨Y', hY', heq, hz⟩)
    · exact absurd (h0 ▶ none_mem_master3) none_not_mem_j0
    · exact hz
    · exact absurd (heq ▶ (t0_mem_j0.mpr (Set.mem_univ ()))) t0_not_mem_j1
    · exact absurd (heq ▶ (t0_mem_j0.mpr (Set.mem_univ ()))) t0_not_mem_j2
  · intro hz; exact Or.inr (Or.inl ⟨rfl, hz⟩)

@[simp] theorem toCC_mem_j1 {x : C.Element} {X : Set Str} (hX : C.mem X) :


    (toCC x).mem (j1 X) ↔ x.mem (embBit false X) := by
  constructor
  · rintro (h0 | ⟨heq, hz⟩ | ⟨X', hX', heqj, hz⟩ | ⟨Y', hY', heqj, hz⟩)
    · exact absurd (h0 ▶ none_mem_master3) none_not_mem_j1
    · obtain ⟨b, hb⟩ := C_nonempty X hX
      exact absurd (heq ▶ (t1_mem_j1.mpr hb)) t1_not_mem_j0
    · rw [j1_injective heqj]; exact hz
    · obtain ⟨b, hb⟩ := C_nonempty X hX
      exact absurd (heqj ▶ (t1_mem_j1.mpr hb)) t1_not_mem_j2
  · intro hz; exact Or.inr (Or.inr (Or.inl ⟨X, hX, rfl, hz⟩))

@[simp] theorem toCC_mem_j2 {x : C.Element} {Y : Set Str} (hY : C.mem Y) :
    (toCC x).mem (j2 Y) ↔ x.mem (embBit true Y) := by
  constructor
  · rintro (h0 | ⟨heq, hz⟩ | ⟨X', hX', heqj, hz⟩ | ⟨Y', hY', heqj, hz⟩)
    · exact absurd (h0 ▶ none_mem_master3) none_not_mem_j2
    · obtain ⟨c, hc⟩ := C_nonempty Y hY
      exact absurd (heq ▶ (t2_mem_j2.mpr hc)) t2_not_mem_j0
    · obtain ⟨c, hc⟩ := C_nonempty Y hY
      exact absurd (heqj ▶ (t2_mem_j2.mpr hc)) t2_not_mem_j1
    · rw [j2_injective heqj]; exact hz
  · intro hz; exact Or.inr (Or.inr (Or.inr ⟨Y, hY, rfl, hz⟩))

def fromCC (s : CC.Element) : C.Element where
  mem W := W = Set.univ
    ∨ (W = ({[]} : Set Str) ∧ s.mem (j0 (Set.univ : Set Unit)))
    ∨ (∃ X, C.mem X ∧ W = embBit false X ∧ s.mem (j1 X))
    ∨ (∃ Y, C.mem Y ∧ W = embBit true Y ∧ s.mem (j2 Y))
  sub := by
    rintro W (rfl | ⟨rfl, -⟩ | ⟨X, hX, rfl, -⟩ | ⟨Y, hY, rfl, -⟩)
    · exact Or.inl ⟨[], cone_nil.symm⟩
    · exact memC_singleton []
    · exact memC_embBit false hX
    · exact memC_embBit true hY
  master_mem := Or.inl rfl
```

```
inter_mem := by
  rintro W W' (rfl | ⟨rfl, hsU⟩ | ⟨X, hX, rfl, hsF⟩ | ⟨Y, hY, rfl, hsT⟩)
    (rfl | ⟨rfl, hsU'⟩ | ⟨X', hX', rfl, hsF'⟩ | ⟨Y', hY', rfl, hsT'⟩)
  · exact Or.inl (by rw [Set.inter_self])
  · exact Or.inr (Or.inl ⟨by rw [Set.univ_inter], hsU'⟩)
  · exact Or.inr (Or.inr (Or.inl ⟨X', hX', by rw [Set.univ_inter], hsF'⟩))
  · exact Or.inr (Or.inr (Or.inr ⟨Y', hY', by rw [Set.univ_inter], hsT'⟩))
  · exact Or.inr (Or.inl ⟨by rw [Set.inter_univ], hsU⟩)
  · exact Or.inr (Or.inl ⟨by rw [Set.inter_self], hsU⟩)
  · exfalso
    have hs := s.inter_mem hsU hsF'; rw [j0_inter_j1] at hs
    obtain ⟨t, ht⟩ := sum3_mem_nonempty (s.sub hs); exact Set.notMem_empty t ht
  · exfalso
    have hs := s.inter_mem hsU hsT'; rw [j0_inter_j2] at hs
    obtain ⟨t, ht⟩ := sum3_mem_nonempty (s.sub hs); exact Set.notMem_empty t ht
  · exact Or.inr (Or.inr (Or.inl ⟨X, hX, by rw [Set.inter_univ], hsF⟩))
  · exfalso
    have hs := s.inter_mem hsF hsU'; rw [Set.inter_comm, j0_inter_j1] at hs
    obtain ⟨t, ht⟩ := sum3_mem_nonempty (s.sub hs); exact Set.notMem_empty t ht
  · refine Or.inr (Or.inr (Or.inl ⟨X ∩ X', ?_, embBit_inter false X X', ?_⟩))
    · have hs := s.inter_mem hsF hsF'; rw [j1_inter_j1] at hs
      exact sum3_mem_j1_inv (s.sub hs)
    · have hs := s.inter_mem hsF hsF'; rw [j1_inter_j1] at hs; exact hs
  · exfalso
    have hs := s.inter_mem hsF hsT'; rw [j1_inter_j2] at hs
    obtain ⟨t, ht⟩ := sum3_mem_nonempty (s.sub hs); exact Set.notMem_empty t ht
  · exact Or.inr (Or.inr (Or.inr ⟨Y, hY, by rw [Set.inter_univ], hsT⟩))
  · exfalso
    have hs := s.inter_mem hsT hsU'; rw [Set.inter_comm, j0_inter_j2] at hs
    obtain ⟨t, ht⟩ := sum3_mem_nonempty (s.sub hs); exact Set.notMem_empty t ht
  · exfalso
    have hs := s.inter_mem hsT hsF'; rw [Set.inter_comm, j1_inter_j2] at hs
    obtain ⟨t, ht⟩ := sum3_mem_nonempty (s.sub hs); exact Set.notMem_empty t ht
  · refine Or.inr (Or.inr (Or.inr ⟨Y ∩ Y', ?_, embBit_inter true Y Y', ?_⟩))
    · have hs := s.inter_mem hsT hsT'; rw [j2_inter_j2] at hs
      exact sum3_mem_j2_inv (s.sub hs)
    · have hs := s.inter_mem hsT hsT'; rw [j2_inter_j2] at hs; exact hs
up_mem := by
  rintro W W' (rfl | ⟨rfl, hsU⟩ | ⟨X, hX, rfl, hsF⟩ | ⟨Y, hY, rfl, hsT⟩) hW' hsub
  · exact Or.inl (Set.univ_subset_iff.mp hsub)
  · rcases memC_cases hW' with rfl | rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨rfl, hsU⟩)
    · exact absurd (hsub (Set.mem_singleton_iff.mpr rfl)) nil_not_mem_embBit
    · exact absurd (hsub (Set.mem_singleton_iff.mpr rfl)) nil_not_mem_embBit
  · rcases memC_cases hW' with rfl | rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
    · exact Or.inl rfl
    · exfalso
      obtain ⟨a, ha⟩ := C_nonempty X hX
      have hm := hsub (⟨a, rfl, ha⟩ : (false :: a) ∈ embBit false X)
      rw [Set.mem_singleton_iff] at hm; exact absurd hm (by simp)
    · refine Or.inr (Or.inr (Or.inl ⟨X', hX', rfl, ?_⟩))
      exact s.up_mem hsF (Or.inr (Or.inr (Or.inl ⟨X', hX', rfl⟩)))
        (j1_subset_j1.mpr (embBit_subset.mp hsub))
    · exfalso
      obtain ⟨a, ha⟩ := C_nonempty X hX
```

```
        obtain ⟨w', he, -⟩ := hsub (⟨a, rfl, ha⟩ : (false :: a) ∈ embBit false X)
        rw [List.cons.injEq] at he; exact absurd he.1 (by decide)
    · rcases memC_cases hW' with rfl | rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
      · exact Or.inl rfl
      · exfalso
        obtain ⟨a, ha⟩ := C_nonempty Y hY
        have hm := hsub (⟨a, rfl, ha⟩ : (true :: a) ∈ embBit true Y)
        rw [Set.mem_singleton_iff] at hm; exact absurd hm (by simp)
      · exfalso
        obtain ⟨a, ha⟩ := C_nonempty Y hY
        obtain ⟨w', he, -⟩ := hsub (⟨a, rfl, ha⟩ : (true :: a) ∈ embBit true Y)
        rw [List.cons.injEq] at he; exact absurd he.1 (by decide)
      · refine Or.inr (Or.inr (Or.inr ⟨Y', hY', rfl, ?_⟩))
        exact s.up_mem hsT (Or.inr (Or.inr (Or.inr ⟨Y', hY', rfl⟩)))
          (j2_subset_j2.mpr (embBit_subset.mp hsub))

@[simp] theorem fromCC_mem_nil {s : CC.Element} :
    (fromCC s).mem ({[]} : Set Str) ↔ s.mem (j0 (Set.univ : Set Unit)) := by
  constructor
  · rintro (h0 | ⟨-, hs⟩ | ⟨X', hX', heq, hs⟩ | ⟨Y', hY', heq, hs⟩)
    · exact absurd h0 singleton_nil_ne_univ
    · exact hs
    · exact absurd heq (singleton_nil_ne_embBit false X')
    · exact absurd heq (singleton_nil_ne_embBit true Y')
  · intro hs; exact Or.inr (Or.inl ⟨rfl, hs⟩)

@[simp] theorem fromCC_mem_embF {s : CC.Element} {X : Set Str} (hX : C.mem X) :
    (fromCC s).mem (embBit false X) ↔ s.mem (j1 X) := by
  constructor
  · rintro (h0 | ⟨heq, hs⟩ | ⟨X', hX', heqj, hs⟩ | ⟨Y', hY', heqj, hs⟩)
    · exact absurd h0 (embBit_ne_univ false X)
    · exact absurd heq.symm (singleton_nil_ne_embBit false X)
    · rw [embBit_injective heqj]; exact hs
    · exact absurd heqj (embBit_ne (show (false : Bool) = true by decide) (C_nonempty X
     hX))
  · intro hs; exact Or.inr (Or.inr (Or.inl ⟨X, hX, rfl, hs⟩))

@[simp] theorem fromCC_mem_embT {s : CC.Element} {Y : Set Str} (hY : C.mem Y) :
    (fromCC s).mem (embBit true Y) ↔ s.mem (j2 Y) := by
  constructor
  · rintro (h0 | ⟨heq, hs⟩ | ⟨X', hX', heqj, hs⟩ | ⟨Y', hY', heqj, hs⟩)
    · exact absurd h0 (embBit_ne_univ true Y)
    · exact absurd heq.symm (singleton_nil_ne_embBit true Y)
    · exact absurd heqj.symm (embBit_ne (show (false : Bool) = true by decide) (
    C_nonempty X' hX'))
    · rw [embBit_injective heqj]; exact hs
  · intro hs; exact Or.inr (Or.inr (Or.inr ⟨Y, hY, rfl, hs⟩))

theorem fromCC_toCC (x : C.Element) : fromCC (toCC x) = x := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨rfl, hs⟩ | ⟨X, hX, rfl, hs⟩ | ⟨Y, hY, rfl, hs⟩)
    · exact x.master_mem
    · exact toCC_mem_j0.mp hs
    · exact (toCC_mem_j1 hX).mp hs
```

```
    · exact (toCC_mem_j2 hY).mp hs
  · intro hW
    rcases memC_cases (x.sub hW) with rfl | rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨rfl, toCC_mem_j0.mpr hW⟩)
    · exact Or.inr (Or.inr (Or.inl ⟨X, hX, rfl, (toCC_mem_j1 hX).mpr hW⟩))
    · exact Or.inr (Or.inr (Or.inr ⟨Y, hY, rfl, (toCC_mem_j2 hY).mpr hW⟩))

theorem toCC_fromCC (s : CC.Element) : toCC (fromCC s) = s := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨rfl, hs⟩ | ⟨X, hX, rfl, hs⟩ | ⟨Y, hY, rfl, hs⟩)
    · exact s.master_mem
    · exact fromCC_mem_nil.mp hs
    · exact (fromCC_mem_embF hX).mp hs
    · exact (fromCC_mem_embT hY).mp hs
  · intro hW
    rcases s.sub hW with rfl | ⟨U, hU, rfl⟩ | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
    · exact Or.inl rfl
    · obtain rfl := hU
      exact Or.inr (Or.inl ⟨rfl, fromCC_mem_nil.mpr hW⟩)
    · exact Or.inr (Or.inr (Or.inl ⟨X, hX, rfl, (fromCC_mem_embF hX).mpr hW⟩))
    · exact Or.inr (Or.inr (Or.inr ⟨Y, hY, rfl, (fromCC_mem_embT hY).mpr hW⟩))

def ccEquiv : C.Element ≃o CC.Element where
  toFun := toCC
  invFun := fromCC
  left_inv := fromCC_toCC
  right_inv := toCC_fromCC
  map_rel_iff' := by
    intro x x'
    constructor
    · intro h W hW
      rcases memC_cases (x.sub hW) with rfl | rfl | ⟨A, hA, rfl⟩ | ⟨A, hA, rfl⟩
      · exact x'.master_mem
      · exact toCC_mem_j0.mp (h _ (Or.inr (Or.inl ⟨rfl, hW⟩)))
      · exact (toCC_mem_j1 hA).mp (h _ (Or.inr (Or.inr (Or.inl ⟨A, hA, rfl, hW⟩)))))
      · exact (toCC_mem_j2 hA).mp (h _ (Or.inr (Or.inr (Or.inr ⟨A, hA, rfl, hW⟩)))))
    · intro h W hW
      rcases hW with rfl | ⟨rfl, hz⟩ | ⟨X, hX, rfl, hz⟩ | ⟨Y, hY, rfl, hz⟩
      · exact Or.inl rfl
      · exact Or.inr (Or.inl ⟨rfl, h _ hz⟩)
      · exact Or.inr (Or.inr (Or.inl ⟨X, hX, rfl, h _ hz⟩))
      · exact Or.inr (Or.inr (Or.inr ⟨Y, hY, rfl, h _ hz⟩))

theorem C_domain_equation :
    C ≅? sum3 unitSys C C unitSys_nonempty C_nonempty C_nonempty :=
  ⟨ccEquiv⟩

end Example62C

end

section
variable {α β ? : Type*}
```

```
theorem j0_injective {X X' : Set α}
    (h : (j0 X : Set (Option (α ? β ? ?))) = j0 X') : X = X' :=
  Set.Subset.antisymm (j0_subset_j0.mp h.subset) (j0_subset_j0.mp h.symm.subset)
end

namespace Example62Regular
open Language

section
variable {n : ℕ}

abbrev Tree (n : ℕ) : Type := List (Fin n) → Bool

def pos (a : Tree n) : Bool := a []

def select (a : Tree n) (σ : List (Fin n)) : Tree n := fun τ => a (σ ++ τ)

@[simp] theorem select_apply (a : Tree n) (σ τ : List (Fin n)) : select a σ τ = a (σ
    ++ τ) := rfl

def child (a : Tree n) (i : Fin n) : Tree n := select a [i]

@[simp] theorem select_nil (a : Tree n) : select a [] = a := by
  funext τ; simp

@[simp] theorem pos_select (a : Tree n) (σ : List (Fin n)) : pos (select a σ) = a σ :=
     by
  simp [pos]

def treeLang (a : Tree n) : Language (Fin n) := {σ | a σ = true}

@[simp] theorem mem_treeLang {a : Tree n} {σ : List (Fin n)} : σ ∈ treeLang a ↔ a σ =
    true := Iff.rfl

def EventuallyPeriodic (a : Tree n) : Prop := (Set.range (select a)).Finite

theorem select_append (a : Tree n) (σ τ : List (Fin n)) :
    select a (σ ++ τ) = select (select a σ) τ := by
  funext ?; simp [List.append_assoc]

theorem select_cons (a : Tree n) (i : Fin n) (σ : List (Fin n)) :
    select a (i :: σ) = select (child a i) σ := by
  funext τ; simp [child]

theorem treeLang_eq_pos (a : Tree n) : treeLang a = {σ | pos (select a σ) = true} :=
    by
  simp only [pos_select]; rfl

theorem treeLang_injective : Function.Injective (treeLang (n := n)) := by
  intro a a' h
  funext σ
  have hmem : (σ ∈ treeLang a) ↔ (σ ∈ treeLang a') := by rw [h]
  simp only [mem_treeLang] at hmem
  cases ha : a σ <;> cases ha' : a' σ <;> simp_all
```

```
theorem treeLang_select (a : Tree n) (σ : List (Fin n)) :
    treeLang (select a σ) = (treeLang a).leftQuotient σ := by
  ext τ
  simp only [mem_treeLang, select_apply, Language.mem_leftQuotient]

theorem eventuallyPeriodic_iff_isRegular (a : Tree n) :
    EventuallyPeriodic a ↔ (treeLang a).IsRegular := by
  have hcomp : (treeLang a).leftQuotient = treeLang ∘ select a :=
    funext fun σ => (treeLang_select a σ).symm
  rw [Language.isRegular_iff_finite_range_leftQuotient, hcomp, Set.range_comp]
  exact (Set.finite_image_iff (treeLang_injective.injOn)).symm

theorem isRegular_iff_exists_eventuallyPeriodic (L : Language (Fin n)) :
    L.IsRegular ↔ ∃ a : Tree n, EventuallyPeriodic a ∧ treeLang a = L := by
  classical
  constructor
  · intro hL
    refine ⟨fun σ => decide (σ ∈ L), ?_, ?_⟩
    · have hlang : treeLang (fun σ => decide (σ ∈ L)) = L := by
        ext σ; simp only [mem_treeLang, decide_eq_true_eq]
      rw [eventuallyPeriodic_iff_isRegular, hlang]; exact hL
    · ext σ; simp only [mem_treeLang, decide_eq_true_eq]
  · rintro ⟨a, hEP, rfl⟩
    exact (eventuallyPeriodic_iff_isRegular a).mp hEP

end

end Example62Regular
open NeighborhoodSystem ApproximableMap Example62 ExampleB

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}

def sumTokMaster (D₀ D₁ : NeighborhoodSystem Str) : Set Str :=
  insert [] (embBit false D₀.master ∪ embBit true D₁.master)

theorem embF_subset_sumTokMaster {X : Set Str} (hX : D₀.mem X) :
    embBit false X ⊆ sumTokMaster D₀ D₁ :=
  (embBit_subset.mpr (D₀.sub_master hX)).trans (Set.subset_union_left.trans (Set.
    subset_insert _ _))

theorem embT_subset_sumTokMaster {Y : Set Str} (hY : D₁.mem Y) :
    embBit true Y ⊆ sumTokMaster D₀ D₁ :=
  (embBit_subset.mpr (D₁.sub_master hY)).trans (Set.subset_union_right.trans (Set.
    subset_insert _ _))

theorem nil_mem_sumTokMaster : ([] : Str) ∈ sumTokMaster D₀ D₁ := Set.mem_insert _ _

theorem embF_ne_sumTokMaster {X : Set Str} : embBit false X = sumTokMaster D₀ D₁ := fun
    h =>
  nil_not_mem_embBit (h.symm ▸ nil_mem_sumTokMaster)

theorem embT_ne_sumTokMaster {Y : Set Str} : embBit true Y = sumTokMaster D₀ D₁ := fun
    h =>
```

```
  nil_not_mem_embBit (h.symm ▶ nil_mem_sumTokMaster)

theorem sumTokMaster_inter_embF {X : Set Str} (hX : D₀.mem X) :
    sumTokMaster D₀ D₁ ∩ embBit false X = embBit false X :=
  Set.inter_eq_right.mpr (embF_subset_sumTokMaster hX)

theorem sumTokMaster_inter_embT {Y : Set Str} (hY : D₁.mem Y) :
    sumTokMaster D₀ D₁ ∩ embBit true Y = embBit true Y :=
  Set.inter_eq_right.mpr (embT_subset_sumTokMaster hY)

end Exercise619
end
end DomainTheory.NeighbourhoodSystems
end
```

EXAMPLE 6.2. Our staple examples B and C satisfy "domain equations" in the form of isomorphisms as we have previously seen. Indeed

$$B \cong B + B, \text{ and}$$

$$C \cong \{\{\Lambda\}\} + C + C,$$

where if we liked we could construct both systems over $\{0,1\}^*$ and have:

$$B = \{\{0,1\}^*\} \cup \{0X \mid X \in B\} \cup \{1X \mid X \in B\}, \text{ and}$$

$$C = \{\{0,1\}^*\} \cup \{\{\Lambda\}\} \cup \{0X \mid X \in C\} \cup \{1X \mid X \in C\}.$$

We leave to the exercises the explanations of what kinds of algebras B and C are and why they are initial. Here we want to propose a simple, yet interesting generalization of B.

Consider this domain equation:

$$A \cong A^n + A^n,$$

where A^n stands for the n-fold cartesian power of A. We can, with the aid of some encoding solve this equation as a neighbourhood system over $\{0,1\}^*$ as follows:

$$A = \{\{0,1\}^*\} \cup \bigcup_{i=0,1} \left\{ i \bigcup_{j<n} 1^j 0 X_j \mid X_j \in A \text{ for all } j < n \right\}.$$

For instance, if $n = 3$, then a typical neighbourhood in A is something like

$$00X_0 \cup 010X_1 \cup 0110X_2,$$

where $X_0, X_1, X_2 \in A$. The first '0' could also be a '1' in front of each of the terms.

In words, an element of A (other than $\bot$) is an n-tuple of elements of A: but there are two separate copies of these, the left one and the right one. We can write for $a \in |A|$

$$a = \pm\langle a_0, a_1, \ldots, a_{n-1}\rangle,$$

where $+$ is chosen if a is on the right, and $-$ if on the left. As a tree diagram a might look like this for $n = 3$:



That is, a is an infinite ternary tree with $+$ or $-$ labels at each node. If each node (subtree) is truly infinite, the element is *total*; if $\perp$ is ever encountered, it is only *partial*; if every branch ends with $\perp$, the tree is a *finite element* of $|A|$.

What can be done with such trees? Let $\sigma \in \{0, 1, \ldots, n-1\}^*$ be a finite sequence of "digits" each less than n. We let $\Sigma = \{0, 1, \ldots, n-1\}$. We can define for $a \in |A|$ the operation $\sigma \mapsto a\sigma$ by recursion on σ:

$$a\Lambda = a, \text{ and}$$

$$ai\sigma = (a_i)\sigma.$$

The $a\sigma$ are just the *subtrees* of a with σ as a *selector*. We also have a map

$$\mathrm{pos} : A \to T$$

where

$$\mathrm{pos}(+\langle a_0, a_1, \ldots, a_{n-1}\rangle) = \mathrm{true}, \text{ and}$$

$$\mathrm{pos}(-\langle a_0, a_1, \ldots, a_{n-1}\rangle) = \mathrm{false}.$$

We say that a (total) tree a is *eventually periodic* iff the set $\{a\sigma \mid \sigma \in \Sigma^*\}$ is finite. The result is that the "language"

$$L_a = \{\sigma \in \Sigma^* \mid \mathrm{pos}(a\sigma) = \mathrm{true}\}$$

corresponding to an eventually periodic tree is always a *regular event* of automata theory, and every such language has this form. In fact, a just represents the initial state of an automaton, and $a\sigma$ represents the state after "reading" a tape σ. $\square$

In order to formulate more generally the idea of a domain equation and initial algebra, we must introduce a small amount of the terminology of category theory. To be as specific as possible, think of systems D over sets $\Delta \subseteq \Sigma^*$ with $\Sigma = \{0, 1\}$, say. They form quite an interesting category with respect to the approximable maps $f : D \to D'$. Recall that to be a category of "domains" and "maps" all that is required is an associative composition $g \circ f$ of maps with identity maps $I : D \to D$ for each domain of the category. And this we certainly have for the systems indicated. And there are many other categories waiting around: for instance, restrict systems to those where $\emptyset \notin D$. This is not much of a restriction, as every system is isomorphic to one like this. Or restrict the maps to being the strict maps $f : D \to D'$ where $f(\perp_D) = \perp_{D'}$. This is an essentially different, though related category. We shall find many others.

What examples 6.1 and 6.2 suggest is the notion of a construct which makes new domains out of old. For example, with D fixed, 6.1 suggests for any domain X over $\Gamma \subseteq \Sigma^*$ a domain

$$T(X) = D + (X \times X).$$

More specifically (converting from $\Sigma = \{0, 1, 2\}$ to $\Sigma = \{0, 1\}$) we could write

$$T(X) = \{\Gamma'\} \cup \{0X \mid X \in D\} \cup \{10X \cup 11Y \mid X, Y \in X\},$$

where we have $\Gamma' = 0\Delta \cup 10\Gamma \cup 11\Gamma$. (By the way, here we definitely want to assume $\emptyset \notin D$ and $\emptyset \notin X$ and to get $\emptyset \notin T(X)$.) This construct is an example of a *functor*, a notion that can be defined abstractly on any category.

3.7.4 Definition 6.3 — functor

Definition_6_3.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_28

@[expose] public section

section
universe u
namespace DomainTheory.NeighbourhoodSystems
variable {Obj : Type u} [Category Obj]

structure Endofunctor (Obj : Type u) [Category Obj] where

  obj : Obj → Obj

  map : {X Y : Obj} → (X ⟶ Y) → ((obj X) ⟶ (obj Y))

  map_id : ∀ (X : Obj), map ((? X)) = (? (obj X))

  map_comp : ∀ {X Y Z : Obj} (g : (Y ⟶ Z)) (f : (X ⟶ Y)),
    map (g ? f) = (map g) ? (map f)

end DomainTheory.NeighbourhoodSystems
end

section

universe u

namespace DomainTheory.NeighbourhoodSystems

variable {Obj : Type u} [Category Obj]

variable {T : Endofunctor Obj}

structure Iso (X Y : Obj) where

  hom : (X ⟶ Y)
```

```
  inv : (Y ⟶ X)

  hom_inv_id : inv ? hom = (? X)

  inv_hom_id : hom ? inv = (? Y)

end DomainTheory.NeighbourhoodSystems
end
```

DEFINITION 6.3. A *functor* on a category (into itself) associates with every domain X in the category another domain $T(X)$ and to every map

$$f : X \to Y$$

another map

$$T(f) : T(X) \to T(Y)$$

in such a way that identity maps and compositions are preserved:

$$T(I_X) = I_{T(X)}, \text{ and}$$

$$T(g \circ f) = T(g) \circ T(f),$$

whenever $f : X \to Y$ and $g : Y \to Z$. □

In the example from 6.1 we have not checked how the special **T** is a functor. The hint is that whenever $f : X \to Y$, then there is a map

$$f \times f : X \times X \to Y \times Y.$$

But there is also a map

$$I_D + f \times f : D + (X \times X) \to D + (Y \times Y)$$

and this suggests the definition of $T(f)$. The details are left to the exercises. Note that the map $T(f)$ just suggested is always strict, so **T** is a functor also for the category of strict maps.

One good reason for a little of the category-theoretic language is that the next definition becomes very neat indeed.

3.7.5 Definition 6.4 — algebra for a functor

Definition_6_4.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Definition_6_3

@[expose] public section

section
universe u
```

```
namespace DomainTheory.NeighbourhoodSystems
variable {Obj : Type u} [Category Obj]

structure TAlgebra (T : Endofunctor Obj) where

  carrier : Obj

  str : ((T.obj carrier) ⟶ carrier)

end DomainTheory.NeighbourhoodSystems
end

section

universe u

namespace DomainTheory.NeighbourhoodSystems

variable {Obj : Type u} [Category Obj]

variable {T : Endofunctor Obj}

structure AlgHom (A B : TAlgebra T) where

  hom : (A.carrier ⟶ B.carrier)

  comm : hom ? A.str = B.str ? T.map hom

end DomainTheory.NeighbourhoodSystems
end
```

DEFINITION 6.4. A ***T*-algebra** is a domain E in the category together with a map

$$k : T(E) \to E.$$

If $m : T(F) \to F$ is another ***T*-algebra**, then a *homomorphism* is a map $h : E \to F$ in the category such that the diagram

$$\begin{array}{ccc} T(E) & \stackrel{k}{\to} & E \\ \downarrow^{T(h)} & & \downarrow^{h} \\ T(F) & \stackrel{m}{\to} & F \end{array}$$

commutes; that is, the equation

$$h \circ k = m \circ T(h)$$

holds. □

In our example from 6.1 a T-algebra is a *strict* map

$$k : D + (E \times E) \to E.$$

But such strict maps are in a one-one correspondence with pairs of (not necessarily strict) maps

$$n : D \to E \quad \text{and} \quad p : E \times E \to E.$$

And the structure $\langle E, n, p \rangle$ is what we called a tree algebra. Definition 6.4 just makes this abstract. The reader should also work out the details showing that 6.4's definition of homomorphism is just what we ought to expect.

Note that the T-algebras and homomorphisms form a category. (Why?) The following definition is so abstract that it could be given for any category.

3.7.6 Definition 6.5 — initial algebra

Definition_6_5.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Definition_6_4
public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Exercise_5_10

@[expose] public section

section
universe u
namespace DomainTheory.NeighbourhoodSystems
variable {Obj : Type u} [Category Obj]
variable {T : Endofunctor Obj}

structure IsInitial (A : TAlgebra T) where

  desc : (B : TAlgebra T) → AlgHom A B

  uniq : ∀ (B : TAlgebra T) (h : AlgHom A B), h = desc B

end DomainTheory.NeighbourhoodSystems
end

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

section

instance : Category DomainObj where
  Hom D E := ApproximableMap D.sys E.sys
  id D := ApproximableMap.idMap D.sys
  comp f g := g.comp f
  id_comp f := ApproximableMap.comp_idMap f
  comp_id f := ApproximableMap.idMap_comp f
  assoc f g h := (ApproximableMap.comp_assoc h g f).symm
end

section
universe u
variable {Obj : Type u} [Category Obj]
variable {T : Endofunctor Obj}
```

```
namespace AlgHom

def comp {A B C : TAlgebra T} (β : AlgHom B C) (α : AlgHom A B) : AlgHom A C where
  hom := β.hom ? α.hom
  comm := by
    have hα := α.comm
    have hβ := β.comm
    have hmap := T.map_comp β.hom α.hom
    dsimp only [compAfter] at hα hβ hmap ⊢
    rw [← CategoryTheory.Category.assoc, hα, CategoryTheory.Category.assoc, hβ,
      ← CategoryTheory.Category.assoc, hmap]

def id (A : TAlgebra T) : AlgHom A A where
  hom := (? A.carrier)
  comm := by
    simp only [compAfter]
    rw [CategoryTheory.Category.comp_id, T.map_id, CategoryTheory.Category.id_comp]

@[simp] theorem id_hom (A : TAlgebra T) : (AlgHom.id A).hom = (? A.carrier) := rfl

@[simp] theorem comp_hom {A B C : TAlgebra T} (β : AlgHom B C) (α : AlgHom A B) :
    (β.comp α).hom = β.hom ? α.hom := rfl

end AlgHom
end

section
universe u

def idEndofunctor (Obj : Type u) [Category Obj] : Endofunctor Obj where
  obj X := X
  map f := f
  map_id _ := rfl
  map_comp _ _ := rfl

@[simp] theorem idEndofunctor_obj {Obj : Type u} [Category Obj] (X : Obj) :
    (idEndofunctor Obj).obj X = X := rfl

@[simp] theorem idEndofunctor_map {Obj : Type u} [Category Obj] {X Y : Obj}
    (f : (X ⟶ Y)) : (idEndofunctor Obj).map f = f := rfl

end

end DomainTheory.NeighbourhoodSystems
end
```

DEFINITION 6.5. A T-algebra is *initial* if and only if there is a unique homomorphism from it into any other T-algebra. □

The word "other" here is not meant to imply "distinct". For an initial algebra there is one and only one homomorphism into itself: the identity map. As we already indicated in 6.1 it is a general fact that the next proposition holds.

3.7.7 Proposition 6.6 — uniqueness of initial algebras

Proposition_6_6.lean

```
module

public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Exercise_5_10
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Definition_6_8
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Definition_6_5
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510
section
universe u
variable {Obj : Type u} [Category Obj] {T : Endofunctor Obj} {A B : TAlgebra T}

def initialIso (hA : IsInitial A) (hB : IsInitial B) : Iso A.carrier B.carrier where
  hom := (hA.desc B).hom
  inv := (hB.desc A).hom
  hom_inv_id := by
    have h := comp_desc_eq_id hA hB
    have := congrArg AlgHom.hom h
    simpa using this
  inv_hom_id := by
    have h := comp_desc_eq_id hB hA
    have := congrArg AlgHom.hom h
    simpa using this

theorem iso_hom_unique (hA : IsInitial A) (h : AlgHom A B) : h = hA.desc B :=
  hA.uniq B h

end

section
set_option linter.unusedVariables false

theorem theorem_66.{u, u_1} : ∀ {Obj : Type u} [inst : CategoryTheory.Category.{u_1, u}
     Obj]
  {T : @DomainTheory.NeighbourhoodSystems.Endofunctor Obj inst}
  {A B : @DomainTheory.NeighbourhoodSystems.TAlgebra Obj inst T}
  (hA : @DomainTheory.NeighbourhoodSystems.IsInitial Obj inst T A)
  (h : @DomainTheory.NeighbourhoodSystems.AlgHom Obj inst T A B),
  @Eq (@DomainTheory.NeighbourhoodSystems.AlgHom Obj inst T A B) h
    (@DomainTheory.NeighbourhoodSystems.IsInitial.desc Obj inst T A hA B) :=
  @DomainTheory.NeighbourhoodSystems.iso_hom_unique
end
```

```
section
variable {α β ? : Type*}
  {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ : NeighborhoodSystem ?}

theorem comp_mono_gen {a a' : ApproximableMap V₁ V₂} {b b' : ApproximableMap V₀ V₁}
    (ha : a ≤ a') (hb : b ≤ b') : a.comp b ≤ a'.comp b' := by
  intro X Z h
  obtain ⟨Y, hXY, hYZ⟩ := h
  exact ⟨Y, hb _ _ hXY, ha _ _ hYZ⟩

theorem isStrict_comp {a : ApproximableMap V₁ V₂} {b : ApproximableMap V₀ V₁}
    (ha : IsStrict a) (hb : IsStrict b) : IsStrict (a.comp b) := by
  rw [isStrict_iff_apply_bot, toElementMap_comp, isStrict_iff_apply_bot.mp hb,
    isStrict_iff_apply_bot.mp ha]

section HomOp

variable (T : Endofunctor DomainObj) (D E : DomainObj)
  (j : ApproximableMap D.sys (T.obj D).sys)
  (k : ApproximableMap (T.obj E).sys E.sys)
  (hj : IsStrict j) (hk : IsStrict k)

def homOpComp (g : StrictMap (T.obj D).sys (T.obj E).sys) : StrictMap D.sys E.sys :=
  ⟨k.comp (g.1.comp j), isStrict_comp hk (isStrict_comp g.2 hj)⟩

theorem homOpComp_mono {g g' : StrictMap (T.obj D).sys (T.obj E).sys} (hgg : g ≤ g') :
    homOpComp T D E j k hj hk g ≤ homOpComp T D E j k hj hk g' := by
  show k.comp (g.1.comp j) ≤ k.comp (g'.1.comp j)
  exact comp_mono_gen le_rfl (comp_mono_gen (Subtype.coe_le_coe.mpr hgg) le_rfl)

end HomOp

theorem toStrictFilter_mono {f f' : StrictMap V₀ V₁} (h : f ≤ f') :
    toStrictFilter f ≤ toStrictFilter f' := by
  intro W hW
  rw [mem_toStrictFilter] at hW ⊢
  exact ⟨hW.1, strictFun_mem_up_closed hW.1 hW.2 h⟩

theorem toStrictMap_mono {φ φ' : (strictFun V₀ V₁).Element} (h : φ ≤ φ') :
    toStrictMap φ ≤ toStrictMap φ' := by
  intro X Y hrel
  rw [toStrictMap_rel] at hrel ⊢
  exact h _ hrel

section HomOp

variable (T : Endofunctor DomainObj) (D E : DomainObj)
  (j : ApproximableMap D.sys (T.obj D).sys)
  (k : ApproximableMap (T.obj E).sys E.sys)
  (hj : IsStrict j) (hk : IsStrict k)

def homOp : ApproximableMap (strictFun (T.obj D).sys (T.obj E).sys) (strictFun D.sys E
    .sys) :=
  ofMono
    (fun N hN => toStrictFilter (homOpComp T D E j k hj hk
      (toStrictMap ((strictFun (T.obj D).sys (T.obj E).sys).principal hN))))
```

```
    (by
      intro N N' hN hN' hN'N
      apply toStrictFilter_mono
      apply homOpComp_mono
      apply toStrictMap_mono
      exact ((strictFun (T.obj D).sys (T.obj E).sys).principal_le_iff hN hN').mpr hN'N
    )

end HomOp

section HomOp

variable (T : Endofunctor DomainObj) (D E : DomainObj)
  (j : ApproximableMap D.sys (T.obj D).sys)

theorem homOp_rel {N : Set (StrictMap (T.obj D).sys (T.obj E).sys)}
    {M : Set (StrictMap D.sys E.sys)} :
    (homOp T D E j k hj hk).rel N M ↔
      ∃ hN : (strictFun (T.obj D).sys (T.obj E).sys).mem N,
        (toStrictFilter (homOpComp T D E j k hj hk
          (toStrictMap ((strictFun (T.obj D).sys (T.obj E).sys).principal hN)))).mem M
    :=
  Iff.rfl

end HomOp

theorem isStrict_of_comp_eq_id {a : ApproximableMap V₁ V₀} {b : ApproximableMap V₀ V₁}
    (h : a.comp b = idMap V₀) : IsStrict a := by
  rw [isStrict_iff_apply_bot]
  refine le_antisymm ?_ (V₀.bot_le _)
  calc a.toElementMap V₁.bot
      ≤ a.toElementMap (b.toElementMap V₀.bot) := toElementMap_mono a (V₁.bot_le _)
    _ = (a.comp b).toElementMap V₀.bot := (toElementMap_comp a b V₀.bot).symm
    _ = V₀.bot := by rw [h, toElementMap_idMap]

theorem toStrictFilter_toStrictMap (φ : (strictFun V₀ V₁).Element) :
    toStrictFilter (toStrictMap φ) = φ := by
  apply Element.ext
  intro W
  constructor
  · rintro ⟨hWmem, hfW⟩
    obtain ⟨⟨L, hL, rfl⟩, _⟩ := hWmem
    exact (mem_sstepFun_iff φ hL).mpr (fun p hp => hfW p hp)
  · intro hW
    refine ⟨φ.sub hW, ?_⟩
    obtain ⟨⟨L, hL, rfl⟩, _⟩ := φ.sub hW
    intro p hp
    exact (mem_sstepFun_iff φ hL).mp hW p hp

section HomOp

variable (T : Endofunctor DomainObj) (D E : DomainObj)
  (j : ApproximableMap D.sys (T.obj D).sys)

theorem homOp_apply_filter (g : StrictMap (T.obj D).sys (T.obj E).sys) :
    (homOp T D E j k hj hk).toElementMap (toStrictFilter g)
```

```
      = toStrictFilter (homOpComp T D E j k hj hk g) := by
  have key : ∀ X Z,
      ((homOp T D E j k hj hk).toElementMap (toStrictFilter g)).mem (sstep X Z)
        ↔ (homOpComp T D E j k hj hk g).1.rel X Z := by
    intro X Z
    constructor
    · rintro ⟨N, hgN, hrel⟩
      rw [homOp_rel] at hrel
      obtain ⟨hN, hmem⟩ := hrel
      rw [mem_toStrictFilter] at hmem
      obtain ⟨_, hsstep⟩ := hmem
      rw [mem_sstep] at hsstep
      obtain ⟨Y2, ⟨Y1, hXY1, hY1Y2⟩, hY2Z⟩ := hsstep
      rw [toStrictMap_rel, mem_principal] at hY1Y2
      obtain ⟨_, hNsub⟩ := hY1Y2
      exact ⟨Y2, ⟨Y1, hXY1, hNsub (mem_toStrictFilter.mp hgN).2⟩, hY2Z⟩
    · intro hrel
      obtain ⟨Y2, ⟨Y1, hXY1, hgY1Y2⟩, hY2Z⟩ := hrel
      refine ⟨sstep Y1 Y2, ?_, ?_⟩
      · rw [mem_toStrictFilter]
        exact ⟨sstep_mem_of_mem (g := g) hgY1Y2, hgY1Y2⟩
      · rw [homOp_rel]
        refine ⟨sstep_mem_of_mem (g := g) hgY1Y2, ?_⟩
        rw [mem_toStrictFilter]
        refine ⟨sstep_mem_of_mem (g := homOpComp T D E j k hj hk g)
          ⟨Y2, ⟨Y1, hXY1, hgY1Y2⟩, hY2Z⟩, ?_⟩
        rw [mem_sstep]
        refine ⟨Y2, ⟨Y1, hXY1, ?_⟩, hY2Z⟩
        rw [toStrictMap_rel, mem_principal]
        exact ⟨sstep_mem_of_mem (g := g) hgY1Y2, subset_rfl⟩
  have hmap : toStrictMap ((homOp T D E j k hj hk).toElementMap (toStrictFilter g))
      = homOpComp T D E j k hj hk g := by
    apply Subtype.ext
    apply ApproximableMap.ext
    intro X Z
    rw [toStrictMap_rel]
    exact key X Z
  have hL := toStrictFilter_toStrictMap
    ((homOp T D E j k hj hk).toElementMap (toStrictFilter g))
  rw [hmap] at hL
  exact hL.symm

end HomOp

end
end DomainTheory.NeighbourhoodSystems
end
```

PROPOSITION 6.6. Any two initial T-algebras are uniquely isomorphic. □

Slightly more interesting is the behaviour of T on initial algebras.

3.7.8 Proposition 6.7 — functor preserves initiality

Proposition_6_7.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Theorem_6_14

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
universe u
variable {Obj : Type u} [Category Obj] {T : Endofunctor Obj}

def lambek (A : TAlgebra T) (hA : IsInitial A) : Iso (T.obj A.carrier) A.carrier where
  hom := A.str
  inv := (hA.desc (tStr A)).hom
  inv_hom_id := str_comp_desc A hA
  hom_inv_id :=
    calc (hA.desc (tStr A)).hom ? A.str
        = (tStr A).str ? T.map (hA.desc (tStr A)).hom := (hA.desc (tStr A)).comm
      _ = T.map A.str ? T.map (hA.desc (tStr A)).hom := rfl
      _ = T.map (A.str ? (hA.desc (tStr A)).hom) := (T.map_comp _ _).symm
      _ = T.map ((? A.carrier)) := by rw [str_comp_desc A hA]
      _ = (? (T.obj A.carrier)) := T.map_id _
end

end DomainTheory.NeighbourhoodSystems
end
```

PROPOSITION 6.7. If $i : T(D) \to D$ is an initial T-algebra, then so is $T(i) : T^2(D) \to T(D)$ and i is the isomorphism from $T(D)$ to D.

Proof: Clearly since T is a functor, the map $T(i)$ has the right mapping character to make $T(D)$ a T-algebra. Since D is initial, we have a commuting diagram:

$$\begin{array}{ccc} T(D) & \xrightarrow{i} & D \\ \downarrow^{T(j)} & & \downarrow^{j} \\ T^2(D) & \xrightarrow{T(i)} & T(D) \end{array}$$

But we also have the trivial diagram:

$$\begin{array}{ccc} T^2(D) & \xrightarrow{T(i)} & T(D) \\ \downarrow^{T(i)} & & \downarrow^{i} \\ T(D) & \xrightarrow{i} & D \end{array}$$

It follows that $i \circ j$ is a homomorphism, so

$$i \circ j = I_D.$$

But then because T is a functor we find:

$$T(i) \circ T(j) = I_{T(D)},$$

and, since j is a homomorphism, we have

$$j \circ i = I_{T(D)}.$$

This shows that i is an isomorphism. □

From 6.7 we see that if we are going to have initial algebras at all we have to satisfy the domain equation

$$D \cong T(D).$$

But generally that is not enough to assure that D is initial. There is a condition that our functors satisfy, however, which guarantees the existence of homomorphisms.

3.7.9 Definition 6.8 — continuity on maps

Definition_6_8.lean

```
module

public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Exercise_5_10
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Definition_6_5

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510
section

def ContinuousOnMaps (T : Endofunctor DomainObj) : Prop :=
  ∀ D E : DomainObj,
    ∃ ? : ApproximableMap (strictFun D.sys E.sys) (strictFun (T.obj D).sys (T.obj E).
    sys),
      ∀ f : StrictMap D.sys E.sys,
        (toStrictMap (?.toElementMap (toStrictFilter f))).1 = T.map (X := D) (Y := E)
    f.1
end

section

theorem ContinuousOnMaps.isStrict_map {T : Endofunctor DomainObj} (h :
    ContinuousOnMaps T)
    {D E : DomainObj} (f : StrictMap D.sys E.sys) :
    IsStrict (T.map (X := D) (Y := E) f.1) := by
  obtain ⟨?, h?⟩ := h D E
  rw [← h? f]
  exact (toStrictMap (?.toElementMap (toStrictFilter f))).2
end

section

theorem toStrictMap_toStrictFilter {α β : Type*} {V₀ : NeighborhoodSystem α}
    {V₁ : NeighborhoodSystem β} (f : StrictMap V₀ V₁) :
    toStrictMap (toStrictFilter f) = f :=
  (strictFunEquiv V₀ V₁).right_inv f
end
```

```
section

theorem continuousOnMaps_id : ContinuousOnMaps (idEndofunctor DomainObj) := by
  intro D E
  refine ⟨idMap (strictFun D.sys E.sys), fun f => ?_⟩
  show (toStrictMap ((idMap (strictFun D.sys E.sys)).toElementMap (toStrictFilter f)))
    .1 = f.1
  rw [toElementMap_idMap, toStrictMap_toStrictFilter]
end

section
universe u
variable {Obj : Type u} [Category Obj] {T : Endofunctor Obj} {A B : TAlgebra T}

theorem comp_desc_eq_id (hA : IsInitial A) (hB : IsInitial B) :
    (hB.desc A).comp (hA.desc B) = AlgHom.id A := by
  rw [hA.uniq A ((hB.desc A).comp (hA.desc B)), hA.uniq A (AlgHom.id A)]

end
end DomainTheory.NeighbourhoodSystems
end
```

DEFINITION 6.8. On the category of domains and strict approximable maps a functor T is *continuous on maps* if for any systems D and E the induced mapping

$$\lambda f.\, T(f) : (D \to_\perp E) \to (T(D) \to_\perp T(E))$$

is approximable.

3.7.10 Theorem 6.9 — homomorphism from initial algebra

Theorem_6_9.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Proposition_6_6
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Definition_6_8

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510
section
variable {α β ? : Type*}
  {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ : NeighborhoodSystem ?}

theorem nonempty_algHom_of_continuousOnMaps
    (T : Endofunctor DomainObj) (hT : ContinuousOnMaps T)
    {D : DomainObj} (iso : Iso (T.obj D) D)
```

```
    (B : TAlgebra T) (hk : IsStrict B.str) :
    Nonempty {g : AlgHom (⟨D, iso.hom⟩ : TAlgebra T) B // IsStrict g.hom} := by

  have hji : iso.inv.comp iso.hom = idMap (T.obj D).sys := iso.hom_inv_id
  have hj : IsStrict iso.inv := isStrict_of_comp_eq_id hji

  obtain ⟨?, h?⟩ := hT D B.carrier

  set Op := (homOp T D B.carrier iso.inv B.str hj hk).comp ? with hOp
  set x := Op.fixElement with hx
  set h := toStrictMap x with hh
  let Tg : StrictMap (T.obj D).sys (T.obj B.carrier).sys :=
    ⟨T.map (X := D) (Y := B.carrier) h.1, hT.isStrict_map (D := D) (E := B.carrier) h⟩
  have hfix : Op.toElementMap x = x := toElementMap_fixElement Op
  have hxh : toStrictFilter h = x := toStrictFilter_toStrictMap x

  have hTg : toStrictMap (?.toElementMap (toStrictFilter h)) = Tg := Subtype.ext (h? h
    )
  have hφ : ?.toElementMap (toStrictFilter h) = toStrictFilter Tg := by
    rw [← hTg]; exact (toStrictFilter_toStrictMap _).symm

  have hOpx : Op.toElementMap x
      = toStrictFilter (homOpComp T D B.carrier iso.inv B.str hj hk Tg) := by
    rw [hOp, toElementMap_comp, ← hxh, hφ, homOp_apply_filter]
  have hcompeq : toStrictFilter (homOpComp T D B.carrier iso.inv B.str hj hk Tg)
      = toStrictFilter h := by
    rw [← hOpx, hfix, hxh]
  have hh' : homOpComp T D B.carrier iso.inv B.str hj hk Tg = h := by
    have h2 := congrArg toStrictMap hcompeq
    rwa [toStrictMap_toStrictFilter, toStrictMap_toStrictFilter] at h2

  have hcore : B.str.comp ((T.map (X := D) (Y := B.carrier) h.1).comp iso.inv) = h.1
    :=
    congrArg Subtype.val hh'

  refine ⟨⟨{ hom := h.1, comm := ?_ }, h.2⟩⟩
  show h.1.comp iso.hom = B.str.comp (T.map (X := D) (Y := B.carrier) h.1)
  conv_lhs => rw [← hcore]
  rw [comp_assoc, comp_assoc, hji, comp_idMap]
end

section
set_option linter.unusedVariables false

theorem theorem_69.{u_4} : ∀
  (T :
    @DomainTheory.NeighbourhoodSystems.Endofunctor.{u_4 + 1, u_4} DomainTheory.
    NeighbourhoodSystems.DomainObj.{u_4}
      DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4}),
  DomainTheory.NeighbourhoodSystems.ContinuousOnMaps.{u_4} T →
    ∀ {D : DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}}
      (iso :
        @DomainTheory.NeighbourhoodSystems.Iso.{u_4 + 1, u_4} DomainTheory.
    NeighbourhoodSystems.DomainObj.{u_4}
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4}
          (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{u_4 + 1, u_4}
```

```
        DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
        DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T D)
      D)
  (B :
    @DomainTheory.NeighbourhoodSystems.TAlgebra.{u_4 + 1, u_4} DomainTheory.
NeighbourhoodSystems.DomainObj.{u_4}
      DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T),
  @DomainTheory.NeighbourhoodSystems.Exercise510.IsStrict.{u_4, u_4}
      (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{u_4 + 1, u_4}
          DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T
          (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{u_4 + 1, u_4}
            DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
            DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T B)).
carrier
      (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{u_4 + 1, u_4}
          DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T B).
carrier
      (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{u_4 + 1, u_4}
          DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T
          (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{u_4 + 1, u_4}
            DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
            DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T B)).
sys
      (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{u_4 + 1, u_4}
          DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T B).sys
      (@DomainTheory.NeighbourhoodSystems.TAlgebra.str.{u_4 + 1, u_4}
        DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
        DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T B) →
    Nonempty.{u_4 + 1}
      (@Subtype.{u_4 + 1}
        (@DomainTheory.NeighbourhoodSystems.AlgHom.{u_4 + 1, u_4} DomainTheory.
NeighbourhoodSystems.DomainObj.{u_4}
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T
          (@DomainTheory.NeighbourhoodSystems.TAlgebra.mk.{u_4 + 1, u_4}
            DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
            DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T D
            (@DomainTheory.NeighbourhoodSystems.Iso.hom.{u_4 + 1, u_4}
              DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4}
              (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{u_4 + 1, u_4}
                DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T D)
              D iso))
          B)
        fun
          (g :
            @DomainTheory.NeighbourhoodSystems.AlgHom.{u_4 + 1, u_4}
              DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T
              (@DomainTheory.NeighbourhoodSystems.TAlgebra.mk.{u_4 + 1, u_4}
                DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T D
```

```
                (@DomainTheory.NeighbourhoodSystems.Iso.hom.{u_4 + 1, u_4}
                  DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
                  DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4}
                  (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{u_4 + 1,
u_4}
                    DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
                    DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4}
T D)
                  D iso))
              B) =>
        @DomainTheory.NeighbourhoodSystems.Exercise510.IsStrict.{u_4, u_4}
          (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{u_4 + 1, u_4}
              DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T
              (@DomainTheory.NeighbourhoodSystems.TAlgebra.mk.{u_4 + 1, u_4}
                DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T D
                (@DomainTheory.NeighbourhoodSystems.Iso.hom.{u_4 + 1, u_4}
                  DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
                  DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4}
                  (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{u_4 + 1,
u_4}
                    DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
                    DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4}
T D)
                  D iso))).carrier
          (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{u_4 + 1, u_4}
              DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T B).
carrier
          (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{u_4 + 1, u_4}
              DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T
              (@DomainTheory.NeighbourhoodSystems.TAlgebra.mk.{u_4 + 1, u_4}
                DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T D
                (@DomainTheory.NeighbourhoodSystems.Iso.hom.{u_4 + 1, u_4}
                  DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
                  DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4}
                  (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{u_4 + 1,
u_4}
                    DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
                    DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4}
T D)
                  D iso))).sys
          (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{u_4 + 1, u_4}
              DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T B).
sys
          (@DomainTheory.NeighbourhoodSystems.AlgHom.hom.{u_4 + 1, u_4}
            DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
            DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T
            (@DomainTheory.NeighbourhoodSystems.TAlgebra.mk.{u_4 + 1, u_4}
              DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T D
              (@DomainTheory.NeighbourhoodSystems.Iso.hom.{u_4 + 1, u_4}
```

```
                    DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
                    DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4}
                    (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{u_4 + 1, u_4}
                      DomainTheory.NeighbourhoodSystems.DomainObj.{u_4}
                      DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{u_4} T
    D)
                    D iso))
                B g)) :=
  DomainTheory.NeighbourhoodSystems.nonempty_algHom_of_continuousOnMaps.{u_4}
end

end DomainTheory.NeighbourhoodSystems
end

section

universe w

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

structure StrictDomainObj : Type (w + 1) where

  carrier : Type w

  sys : NeighborhoodSystem carrier

  nonempty : ∀ X, sys.mem X → X.Nonempty

end DomainTheory.NeighbourhoodSystems
end

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

instance : Category StrictDomainObj where
  Hom D E := StrictMap D.sys E.sys
  id D := ⟨ApproximableMap.idMap D.sys, isStrict_idMap⟩
  comp f g := ⟨g.1.comp f.1, isStrict_comp g.2 f.2⟩
  id_comp f := Subtype.ext (ApproximableMap.comp_idMap f.1)
  comp_id f := Subtype.ext (ApproximableMap.idMap_comp f.1)
  assoc f g h := Subtype.ext (ApproximableMap.comp_assoc h.1 g.1 f.1).symm

@[simp] theorem StrictDomainObj.id_val (D : StrictDomainObj) :
    ((? D) : StrictMap D.sys D.sys).1 = ApproximableMap.idMap D.sys := rfl

@[simp] theorem StrictDomainObj.comp_val {D E F : StrictDomainObj}
    (g : (E ⟶ F)) (f : (D ⟶ E)) :
    ((g ? f : StrictMap D.sys F.sys)).1 = g.1.comp f.1 := rfl

end

section
```

```
open NeighborhoodSystem

namespace Example61

variable {α : Type*}

@[simp] theorem mem_embZero {X : Set α} {p : List Bool} {a : α} :
    (p, a) ∈ embZero X ↔ p = [] ∧ a ∈ X := Iff.rfl

@[simp] theorem mem_embL {P : Set (List Bool × α)} {p : List Bool} {a : α} :
    (p, a) ∈ embL P ↔ ∃ p', p = true :: p' ∧ (p', a) ∈ P := Iff.rfl

@[simp] theorem mem_embR {Q : Set (List Bool × α)} {p : List Bool} {a : α} :
    (p, a) ∈ embR Q ↔ ∃ q', p = false :: q' ∧ (q', a) ∈ Q := Iff.rfl

@[simp] theorem mem_embPair {P Q : Set (List Bool × α)} {p : List Bool} {a : α} :
    (p, a) ∈ embPair P Q ↔
      (∃ p', p = true :: p' ∧ (p', a) ∈ P) ∨ (∃ q', p = false :: q' ∧ (q', a) ∈ Q) :=
    Iff.rfl

@[simp] theorem mem_Gamma {D : NeighborhoodSystem α} {p : List Bool} {a : α} :
    (p, a) ∈ Gamma D ↔ a ∈ D.master := Iff.rfl

theorem Gamma_nonempty {D : NeighborhoodSystem α} (hD : ∀ X, D.mem X → X.Nonempty) :
    (Gamma D).Nonempty := by
  obtain ⟨a, ha⟩ := hD D.master D.master_mem; exact ⟨([], a), ha⟩

theorem embPair_inter (P Q P' Q' : Set (List Bool × α)) :
    embPair P Q ∩ embPair P' Q' = embPair (P ∩ P') (Q ∩ Q') := by
  ext ⟨p, a⟩
  simp only [Set.mem_inter_iff, mem_embPair]
  rcases p with _ | ⟨b, ps⟩
  · simp
  · cases b <;> simp [List.cons.injEq]

theorem embPair_nonempty {P Q : Set (List Bool × α)} (hP : P.Nonempty) :
    (embPair P Q).Nonempty := by
  obtain ⟨⟨p', a⟩, hP⟩ := hP; exact ⟨(true :: p', a), Or.inl ⟨p', rfl, hP⟩⟩

theorem embPair_subset {P Q P' Q' : Set (List Bool × α)} :
    embPair P Q ⊆ embPair P' Q' ↔ P ⊆ P' ∧ Q ⊆ Q' := by
  constructor
  · intro h
    refine ⟨fun t ht => ?_, fun t ht => ?_⟩
    · obtain ⟨p', a⟩ := t
      have hmem : ((true :: p', a) : List Bool × α) ∈ embPair P' Q' :=
        h (Or.inl ⟨p', rfl, ht⟩)
      rcases hmem with ⟨p'', hp'', hP'⟩ | ⟨q'', hq'', -⟩
      · simp only [List.cons.injEq, true_and] at hp''; exact hp'' ▸ hP'
      · exact absurd hq'' (by simp)
    · obtain ⟨q', a⟩ := t
      have hmem : ((false :: q', a) : List Bool × α) ∈ embPair P' Q' :=
        h (Or.inr ⟨q', rfl, ht⟩)
      rcases hmem with ⟨p'', hp'', -⟩ | ⟨q'', hq'', hQ'⟩
      · exact absurd hp'' (by simp)
      · simp only [List.cons.injEq, true_and] at hq''; exact hq'' ▸ hQ'
```

```
  · rintro ⟨hP, hQ⟩ t ht
    rcases ht with ⟨p', hp', hPmem⟩ | ⟨q', hq', hQmem⟩
    · exact Or.inl ⟨p', hp', hP hPmem⟩
    · exact Or.inr ⟨q', hq', hQ hQmem⟩

theorem embPair_injective {P Q P' Q' : Set (List Bool × α)}
    (h : embPair P Q = embPair P' Q') : P = P' ∧ Q = Q' := by
  obtain ⟨hP, hQ⟩ := embPair_subset.mp h.subset
  obtain ⟨hP', hQ'⟩ := embPair_subset.mp h.symm.subset
  exact ⟨Set.Subset.antisymm hP hP', Set.Subset.antisymm hQ hQ'⟩

theorem embPair_subset_Gamma {D : NeighborhoodSystem α} {P Q : Set (List Bool × α)}
    (hP : P ⊆ Gamma D) (hQ : Q ⊆ Gamma D) : embPair P Q ⊆ Gamma D := by
  rintro ⟨p, a⟩ (⟨p', -, hPmem⟩ | ⟨q', -, hQmem⟩)
  · have h := hP hPmem; exact h
  · have h := hQ hQmem; exact h

theorem embZero_inter (X X' : Set α) :
    embZero X ∩ embZero X' = embZero (X ∩ X' : Set α) := by
  ext ⟨p, a⟩
  simp only [Set.mem_inter_iff, mem_embZero]
  tauto

theorem embZero_inter_embPair (X : Set α) (P Q : Set (List Bool × α)) :
    embZero X ∩ embPair P Q = ∅ := by
  ext ⟨p, a⟩
  simp only [Set.mem_inter_iff, mem_embZero, mem_embPair, Set.mem_empty_iff_false,
    iff_false,
    not_and, not_or]
  rintro ⟨rfl, -⟩
  exact ⟨by rintro ⟨p', hp', -⟩; exact absurd hp' (by simp), by rintro ⟨q', hq', -⟩;
    exact absurd hq' (by simp)⟩

theorem embZero_nonempty {X : Set α} (hX : X.Nonempty) : (embZero X).Nonempty := by
  obtain ⟨a, ha⟩ := hX; exact ⟨([], a), rfl, ha⟩

theorem embZero_subset {X X' : Set α} : embZero X ⊆ embZero X' ↔ X ⊆ X' := by
  constructor
  · intro h a ha
    have : (([], a) : List Bool × α) ∈ embZero X' := h ⟨rfl, ha⟩
    exact this.2
  · intro h t ht; exact ⟨ht.1, h ht.2⟩

theorem embZero_injective {X X' : Set α} (h : embZero X = embZero X') : X = X' :=
  Set.Subset.antisymm (embZero_subset.mp h.subset) (embZero_subset.mp h.symm.subset)

theorem embZero_subset_Gamma {D : NeighborhoodSystem α} {X : Set α} (hX : D.mem X) :
    embZero X ⊆ Gamma D := by
  rintro ⟨p, a⟩ ⟨-, ha⟩; exact D.sub_master hX ha

theorem memS_nonempty {D : NeighborhoodSystem α} (hD : ∀ X, D.mem X → X.Nonempty)
    {W : Set (List Bool × α)} (hW : MemS D W) : W.Nonempty := by
  induction hW with
  | gamma => exact Gamma_nonempty hD
  | zero hX => exact embZero_nonempty (hD _ hX)
  | pair _ _ ihP _ => exact embPair_nonempty ihP
```

```
theorem memS_subset_gamma {D : NeighborhoodSystem α} {W : Set (List Bool × α)}
    (hW : MemS D W) : W ⊆ Gamma D := by
  induction hW with
  | gamma => exact subset_rfl
  | zero hX => exact embZero_subset_Gamma hX
  | pair _ _ ihP ihQ => exact embPair_subset_Gamma ihP ihQ

theorem memS_inter {D : NeighborhoodSystem α} (hD : ∀ X, D.mem X → X.Nonempty) :
    ∀ {X : Set (List Bool × α)}, MemS D X → ∀ {Y : Set (List Bool × α)}, MemS D Y →
      ∀ {Z : Set (List Bool × α)}, MemS D Z → Z ⊆ X ∩ Y → MemS D (X ∩ Y) := by
  intro X hX
  induction hX with
  | gamma =>
    intro Y hY Z _ _
    rw [Set.inter_eq_right.mpr (memS_subset_gamma hY)]; exact hY
  | @zero A hA =>
    intro Y hY Z hZ hsub
    cases hY with
    | gamma =>
      rw [Set.inter_eq_left.mpr (embZero_subset_Gamma hA)]; exact MemS.zero hA
    | @zero B hB =>
      rw [embZero_inter]

      rw [embZero_inter] at hsub
      cases hZ with
      | gamma =>
        obtain ⟨a, ha⟩ := hD D.master D.master_mem
        exact absurd (hsub (show ((true :: [], a) : List Bool × α) ∈ Gamma D from ha))
     (by simp)
      | @zero C hC =>
        exact MemS.zero (D.inter_mem hA hB hC (embZero_subset.mp hsub))
      | @pair P Q hP hQ =>
        obtain ⟨t, hmem⟩ := embPair_nonempty (memS_nonempty hD hP) (Q := Q)
        have hempty : t.1 = [] := (hsub hmem).1
        rcases hmem with ⟨p', hp', -⟩ | ⟨q', hq', -⟩
        · rw [hp'] at hempty; exact absurd hempty (by simp)
        · rw [hq'] at hempty; exact absurd hempty (by simp)
    | @pair P Q _ _ =>
      rw [embZero_inter_embPair] at hsub
      obtain ⟨z, hz⟩ := memS_nonempty hD hZ
      exact absurd (hsub hz) (Set.notMem_empty z)
  | @pair P Q hP hQ ihP ihQ =>
    intro Y hY Z hZ hsub
    cases hY with
    | gamma =>
      rw [Set.inter_eq_left.mpr (embPair_subset_Gamma (memS_subset_gamma hP) (
   memS_subset_gamma hQ))]
      exact MemS.pair hP hQ
    | @zero B hB =>
      rw [Set.inter_comm, embZero_inter_embPair] at hsub
      obtain ⟨z, hz⟩ := memS_nonempty hD hZ
      exact absurd (hsub hz) (Set.notMem_empty z)
    | @pair P' Q' hP' hQ' =>
      rw [embPair_inter]
      rw [embPair_inter] at hsub
```

```
      cases hZ with
      | gamma =>
        obtain ⟨a, ha⟩ := hD D.master D.master_mem
        exact absurd (hsub (show (([], a) : List Bool × α) ∈ Gamma D from ha)) (by
    simp)
      | @zero C hC =>
        obtain ⟨a, ha⟩ := hD C hC
        exact absurd (hsub (show (([], a) : List Bool × α) ∈ embZero C from ⟨rfl, ha⟩))
     (by simp)
      | @pair Z₀ Z₁ hZ₀ hZ₁ =>
        obtain ⟨hsub₀, hsub₁⟩ := embPair_subset.mp hsub
        exact MemS.pair (ihP hP' hZ₀ hsub₀) (ihQ hQ' hZ₁ hsub₁)

abbrev Dsharp (D : NeighborhoodSystem α) (hD : ∀ X, D.mem X → X.Nonempty) :
    NeighborhoodSystem (List Bool × α) where
  mem := MemS D
  master := Gamma D
  master_nonempty := by
    obtain ⟨a, ha⟩ := D.master_nonempty
    exact ⟨([], a), ha⟩
  master_mem := MemS.gamma
  inter_mem := fun hX hY hZ hsub => memS_inter hD hX hY hZ hsub
  sub_master := memS_subset_gamma

@[simp] theorem Dsharp_mem {D : NeighborhoodSystem α} {hD : ∀ X, D.mem X → X.Nonempty}
    {W : Set (List Bool × α)} : (Dsharp D hD).mem W ↔ MemS D W := Iff.rfl

@[simp] theorem Dsharp_master {D : NeighborhoodSystem α} {hD : ∀ X, D.mem X → X.
    Nonempty} :
    (Dsharp D hD).master = Gamma D := rfl

theorem memS_embPair_inv {D : NeighborhoodSystem α} (hD : ∀ X, D.mem X → X.Nonempty)
    {P Q : Set (List Bool × α)} (h : MemS D (embPair P Q)) : MemS D P ∧ MemS D Q := by
  generalize hW : embPair P Q = W at h
  cases h with
  | gamma =>
    exfalso
    obtain ⟨a, ha⟩ := hD D.master D.master_mem
    have h1 : (([], a) : List Bool × α) ∈ Gamma D := ha
    rw [← hW] at h1
    rcases h1 with ⟨p', hp', -⟩ | ⟨q', hq', -⟩
    · simp at hp'
    · simp at hq'
  | @zero X hX =>
    exfalso
    obtain ⟨t, ht⟩ := embZero_nonempty (hD X hX)
    have hempty : t.1 = [] := ht.1
    rw [← hW] at ht
    rcases ht with ⟨p', hp', -⟩ | ⟨q', hq', -⟩
    · rw [hp'] at hempty; simp at hempty
    · rw [hq'] at hempty; simp at hempty
  | @pair P' Q' hP' hQ' =>
    obtain ⟨hPP, hQQ⟩ := embPair_injective hW
    rw [hPP, hQQ]; exact ⟨hP', hQ'⟩

theorem memS_embZero_inv {D : NeighborhoodSystem α} (hD : ∀ X, D.mem X → X.Nonempty) {
```

```
    X : Set α}
    (h : MemS D (embZero X)) : D.mem X := by
  generalize hW : embZero X = W at h
  cases h with
  | gamma =>
    exfalso
    obtain ⟨a, ha⟩ := hD D.master D.master_mem
    have h1 : ((true :: [], a) : List Bool × α) ∈ Gamma D := ha
    rw [← hW] at h1; exact absurd h1.1 (by simp)
  | @zero X' hX' => rw [embZero_injective hW]; exact hX'
  | @pair P Q hP hQ =>
    exfalso
    obtain ⟨t, ht⟩ := embPair_nonempty (memS_nonempty hD hP) (Q := Q)
    have hcons : t.1 = [] := by
      rcases ht with ⟨p', hp', -⟩ | ⟨q', hq', -⟩
      · simp [hp']
      · simp [hq']
    have hz : t ∈ embZero X := by rw [← hW] at ht; exact ht
    exact hcons hz.1

section Equation

variable (D : NeighborhoodSystem α) (hD : ∀ X, D.mem X → X.Nonempty)

include hD

theorem prod_dsharp_nonempty :
    ∀ V, (prod (Dsharp D hD) (Dsharp D hD)).mem V → V.Nonempty := by
  rintro V ⟨P, Q, hP, hQ, rfl⟩
  obtain ⟨t, ht⟩ := memS_nonempty hD hP
  exact ⟨Sum.inl t, mem_prodNbhd_inl.mpr ht⟩

end Equation

end Example61
end

end DomainTheory.NeighbourhoodSystems
end

section

universe w

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap

structure MonotoneAt (T : Endofunctor DomainObj.{w}) {α : Type w}
    {D E : NeighborhoodSystem α} (h : D ? E) : Prop where

  carrier_eq : (T.obj ⟨α, E⟩).carrier = (T.obj ⟨α, D⟩).carrier

  sub : (T.obj ⟨α, D⟩).sys ?
    (carrier_eq ▶ (T.obj ⟨α, E⟩).sys : NeighborhoodSystem (T.obj ⟨α, D⟩).carrier)
```

```
  inj_heq : HEq (T.map (X := ⟨α, D⟩) (Y := ⟨α, E⟩) h.inj) sub.inj

  proj_heq : HEq (T.map (X := ⟨α, E⟩) (Y := ⟨α, D⟩) h.proj) sub.proj

end DomainTheory.NeighbourhoodSystems
end
```

THEOREM 6.9. If the functor T is continuous on maps and if $D \cong T(D)$, so in particular D is a T-algebra, then for any T-algebra $k : T(E) \to E$ there is a homomorphism $h : D \to E$.

Proof: Let $i : T(D) \to D$ make D a T-algebra, where $j : D \to T(D)$ is the inverse so that i is an isomorphism of domains. Suppose that $k : T(E) \to E$ is any T-algebra. A homomorphism $h : D \to E$ would satisfy

$$h \circ i = k \circ T(h).$$

Rewrite this equation as

$$h = k \circ T(h) \circ j.$$

In the domain of strict maps $(D \to E)$ this is a fixed-point equation for an approximable map

$$\lambda h.\, k \circ T(h) \circ j$$

by our assumption on T. Thus, the desired homomorphism exists. □

The final question we have to answer is why in our category the minimal D exist. The reason is that the functors T that we have in mind possess further continuity properties on domains. This is conveniently expressed in terms of a notion of "subdomain".

3.7.11 Definition 6.10 — subdomain

DEFINITION 6.10. For two neighbourhood systems D and E we write

$$D \lhd E$$

to mean that these are neighbourhood systems over the same set of tokens Δ and not only is $D \subseteq E$ but whenever $X, Y \in D$ and $X \cap Y \in E$, then $X \cap Y \in D$. □

For the subdomain relation $D \lhd E$ to hold, D has to be a smaller family of neighbourhoods, but the notion of consistency in D also has to be the same as in E. Note that if $D_0 \lhd E$ and $D_1 \lhd E$ then

$$D_0 \lhd D_1 \text{ iff } D_0 \subseteq D_1.$$

It is also easy to prove that the union of a directed family of subdomains of E is again a subdomain. As a consequence of this remark we have:

Definition_6_10.lean

```
module

public import Mathlib.CategoryTheory.Category.Basic

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    NeighborhoodSystem
```

```
public import Mathlib.Tactic.ToAdditive

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
export CategoryTheory (Category)

open scoped CategoryTheory

scoped notation "?" => CategoryTheory.CategoryStruct.id
end

section
variable {α : Type*}

structure Subsystem (D E : NeighborhoodSystem α) : Prop where

  master_eq : D.master = E.master

  sub : ∀ {X : Set α}, D.mem X → E.mem X

  inter_closed : ∀ {X Y : Set α}, D.mem X → D.mem Y → E.mem (X ∩ Y) → D.mem (X ∩ Y)

@[inherit_doc] infix:50 " ? " => Subsystem

namespace Subsystem

theorem _root_.DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.ext {D E :
    NeighborhoodSystem α}
    (hmem : ∀ X, D.mem X ↔ E.mem X) (hmaster : D.master = E.master) : D = E := by
  rcases D with ⟨Dmem, Dmaster, _, _, _⟩
  rcases E with ⟨Emem, Emaster, _, _, _⟩
  have hm : Dmem = Emem := funext fun X => propext (hmem X)
  subst hm
  subst hmaster
  rfl

theorem antisymm {D E : NeighborhoodSystem α} (h₁ : D ? E) (h₂ : E ? D) : D = E :=
  NeighborhoodSystem.ext (fun _ => ⟨fun h => h₁.sub h, fun h => h₂.sub h⟩) h₁.master_eq

theorem refl (D : NeighborhoodSystem α) : D ? D where
  master_eq := rfl
  sub h := h
  inter_closed _ _ h := h

theorem trans {D E F : NeighborhoodSystem α} (h₁ : D ? E) (h₂ : E ? F) : D ? F where
  master_eq := h₁.master_eq.trans h₂.master_eq
  sub h := h₂.sub (h₁.sub h)
  inter_closed hX hY hXY :=
    h₁.inter_closed hX hY (h₂.inter_closed (h₁.sub hX) (h₁.sub hY) hXY)

theorem subsystem_iff_subset_of_common {D₀ D₁ E : NeighborhoodSystem α}
    (h₀ : D₀ ? E) (h₁ : D₁ ? E) :
    D₀ ? D₁ ↔ ∀ {X : Set α}, D₀.mem X → D₁.mem X := by
```

```
  constructor
  · intro h _ hX; exact h.sub hX
  · intro hsub
    refine ⟨h₀.master_eq.trans h₁.master_eq.symm, hsub, ?_⟩
    intro X Y hX hY hXY
    exact h₀.inter_closed hX hY (h₁.sub hXY)

end Subsystem

end

end DomainTheory.NeighbourhoodSystems
end

section

universe w

namespace DomainTheory.NeighbourhoodSystems

structure DomainObj : Type (w + 1) where

  carrier : Type w

  sys : NeighborhoodSystem carrier

end DomainTheory.NeighbourhoodSystems
end

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem

namespace Example61

variable {α : Type*}

def Gamma (D : NeighborhoodSystem α) : Set (List Bool × α) := {t | t.2 ∈ D.master}

def embL (P : Set (List Bool × α)) : Set (List Bool × α) := {t | ∃ p', t.1 = true :: p
    ' ∧ (p', t.2) ∈ P}

def embR (Q : Set (List Bool × α)) : Set (List Bool × α) := {t | ∃ q', t.1 = false ::
    q' ∧ (q', t.2) ∈ Q}

def embPair (P Q : Set (List Bool × α)) : Set (List Bool × α) := embL P ∪ embR Q

def embZero (X : Set α) : Set (List Bool × α) := {t | t.1 = [] ∧ t.2 ∈ X}

end Example61
end
end DomainTheory.NeighbourhoodSystems
end
```

3.7.12 Proposition 6.11 — lattice of subsystems

PROPOSITION 6.11. For a given neighbourhood system E, the set of subsystems

$$\{D \mid D \triangleleft E\}$$

forms a domain in its own right. □

The subdomain relationship implies a mapping relationship between the domains.

Proposition_6_11.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_22

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Definition_6_10

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Proposition611
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem Set DomainTheory.
    NeighbourhoodSystems.Exercise222

section
variable {α : Type*}

def subFam (E : NeighborhoodSystem α) : Set (Set (Set α)) :=
  {? | ∃ D : NeighborhoodSystem α, D ? E ∧ ? = {X | D.mem X}}

theorem subFam_inter_closed (E : NeighborhoodSystem α) {? : Set (Set α)} {X Y : Set α}
    (h : ? ∈ subFam E) (hX : X ∈ ?) (hY : Y ∈ ?) (hXY : E.mem (X ∩ Y)) : X ∩ Y ∈ ? :=
    by
  obtain ⟨D, hD, rfl⟩ := h
  exact hD.inter_closed hX hY hXY

theorem subFam_master_mem (E : NeighborhoodSystem α) {? : Set (Set α)}
    (h : ? ∈ subFam E) : E.master ∈ ? := by
  obtain ⟨D, hD, rfl⟩ := h
  rw [← hD.master_eq]
  exact D.master_mem

theorem subFam_mem_E (E : NeighborhoodSystem α) {? : Set (Set α)} {X : Set α}
    (h : ? ∈ subFam E) (hX : X ∈ ?) : E.mem X := by
  obtain ⟨D, hD, rfl⟩ := h
  exact hD.sub hX

def interSys (E : NeighborhoodSystem α) (? : Set (Set (Set α)))
    (hne : ?.Nonempty) (h? : ? ⊆ subFam E) : NeighborhoodSystem α where
  mem X := ∀ ? ∈ ?, X ∈ ?
  master := E.master
  master_nonempty := E.master_nonempty
  master_mem := fun ? h? => subFam_master_mem E (h? h?)
  inter_mem := by
    intro X Y Z hX hY hZ hsub ? h?
    have hEX : E.mem X := subFam_mem_E E (h? h?) (hX ? h?)
    have hEY : E.mem Y := subFam_mem_E E (h? h?) (hY ? h?)
```

```
    have hEZ : E.mem Z := subFam_mem_E E (h? h?) (hZ ? h?)
    exact subFam_inter_closed E (h? h?) (hX ? h?) (hY ? h?) (E.inter_mem hEX hEY hEZ
    hsub)
  sub_master := by
    intro X hX
    obtain ⟨?, h?⟩ := hne
    exact E.sub_master (subFam_mem_E E (h? h?) (hX ? h?))

theorem interSys_nbset (E : NeighborhoodSystem α) (? : Set (Set (Set α)))
    (hne : ?.Nonempty) (h? : ? ⊆ subFam E) :
    {X | (interSys E ? hne h?).mem X} = ⋂₀ ? := by
  ext X
  exact Set.mem_sInter.symm

theorem interSys_subsystem (E : NeighborhoodSystem α) (? : Set (Set (Set α)))
    (hne : ?.Nonempty) (h? : ? ⊆ subFam E) : interSys E ? hne h? ? E where
  master_eq := rfl
  sub := by
    intro X hX
    obtain ⟨?, h?⟩ := hne
    exact subFam_mem_E E (h? h?) (hX ? h?)
  inter_closed := by
    intro X Y hX hY hEXY ? h?
    exact subFam_inter_closed E (h? h?) (hX ? h?) (hY ? h?) hEXY

def ofMem (E : NeighborhoodSystem α) (? : Set (Set α)) (h : ? ∈ subFam E) :
    NeighborhoodSystem α where
  mem X := X ∈ ?
  master := E.master
  master_nonempty := E.master_nonempty
  master_mem := subFam_master_mem E h
  inter_mem := by
    intro X Y Z hX hY hZ hsub
    exact subFam_inter_closed E h hX hY
      (E.inter_mem (subFam_mem_E E h hX) (subFam_mem_E E h hY) (subFam_mem_E E h hZ)
    hsub)
  sub_master := fun hX => E.sub_master (subFam_mem_E E h hX)

theorem ofMem_subsystem (E : NeighborhoodSystem α) (? : Set (Set α)) (h : ? ∈ subFam E
    ) :
    ofMem E ? h ? E where
  master_eq := rfl
  sub := subFam_mem_E E h
  inter_closed := subFam_inter_closed E h
end

section
set_option linter.unusedVariables false

theorem theorem_611.{u_1} : ∀ {α : Type u_1} (E : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α) (? : Set (Set α))
  (h :
    @Membership.mem (Set (Set α)) (Set (Set (Set α))) (@Set.instMembership (Set (Set α
    )))
      (@DomainTheory.NeighbourhoodSystems.Proposition611.subFam α E) ?),
  @DomainTheory.NeighbourhoodSystems.Subsystem α (@DomainTheory.NeighbourhoodSystems.
```

```
    Proposition611.ofMem α E ? h) E :=
  @DomainTheory.NeighbourhoodSystems.Proposition611.ofMem_subsystem
end

end DomainTheory.NeighbourhoodSystems.Proposition611

namespace DomainTheory.NeighbourhoodSystems.Proposition611
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem Set DomainTheory.
    NeighbourhoodSystems.Exercise222

section
variable {α : Type*}

instance subPartialOrder (E : NeighborhoodSystem α) :
    PartialOrder {D : NeighborhoodSystem α // D ? E} where
  le D₀ D₁ := D₀.1 ? D₁.1
  le_refl D := Subsystem.refl D.1
  le_trans _ _ _ h₁ h₂ := h₁.trans h₂
  le_antisymm _ _ h₁ h₂ := Subtype.ext (h₁.antisymm h₂)
end

end DomainTheory.NeighbourhoodSystems.Proposition611

namespace DomainTheory.NeighbourhoodSystems.Proposition611
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem Set DomainTheory.
    NeighbourhoodSystems.Exercise222

section
variable {α : Type*}

theorem subFam_nonempty (E : NeighborhoodSystem α) : (subFam E).Nonempty :=
  ⟨{X | E.mem X}, E, Subsystem.refl E, rfl⟩

theorem subFam_sInter_mem (E : NeighborhoodSystem α) (? : Set (Set (Set α)))
    (hne : ?.Nonempty) (h? : ? ⊆ subFam E) : ⋂₀ ? ∈ subFam E :=
  ⟨interSys E ? hne h?, interSys_subsystem E ? hne h?, (interSys_nbset E ? hne h?).symm
    ⟩

def subIso (E : NeighborhoodSystem α) :
    {D : NeighborhoodSystem α // D ? E} ≃o {? : Set (Set α) // ? ∈ subFam E} where
  toFun D := ⟨{X | D.1.mem X}, ⟨D.1, D.2, rfl⟩⟩
  invFun ? := ⟨ofMem E ?.1 ?.2, ofMem_subsystem E ?.1 ?.2⟩
  left_inv := by
    intro D
    apply Subtype.ext
    apply NeighborhoodSystem.ext
    · intro X; exact Iff.rfl
    · exact D.2.master_eq.symm
  right_inv := by
    intro ?
    apply Subtype.ext
    ext X
    exact Iff.rfl
  map_rel_iff' := by
    intro a b
    show ({X | a.1.mem X} : Set (Set α)) ⊆ {X | b.1.mem X} ↔ a.1 ? b.1
```

```
    constructor
    · intro hsub
      refine (Subsystem.subsystem_iff_subset_of_common a.2 b.2).mpr ?_
      intro X hX
      exact hsub hX
    · intro hsub X hX
      exact hsub.sub hX
end

end DomainTheory.NeighbourhoodSystems.Proposition611

namespace DomainTheory.NeighbourhoodSystems.Proposition611
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem Set DomainTheory.
    NeighbourhoodSystems.Exercise222

section
variable {α : Type*}

def unionSys (E : NeighborhoodSystem α) (? : Set (Set (Set α)))
    (hne : ?.Nonempty) (h? : ? ⊆ subFam E) (hdir : DirectedOn (· ⊆ ·) ?) :
    NeighborhoodSystem α where
  mem X := ∃ ? ∈ ?, X ∈ ?
  master := E.master
  master_nonempty := E.master_nonempty
  master_mem := by
    obtain ⟨?, h?⟩ := hne
    exact ⟨?, h?, subFam_master_mem E (h? h?)⟩
  inter_mem := by
    intro X Y Z hX hY hZ hsub
    obtain ⟨?x, h?x, hXx⟩ := hX
    obtain ⟨?y, h?y, hYy⟩ := hY
    obtain ⟨?z, h?z, hZz⟩ := hZ
    obtain ⟨?s, h?s, hxs, hys⟩ := hdir ?x h?x ?y h?y
    have hXs : X ∈ ?s := hxs hXx
    have hYs : Y ∈ ?s := hys hYy
    have hEX : E.mem X := subFam_mem_E E (h? h?s) hXs
    have hEY : E.mem Y := subFam_mem_E E (h? h?s) hYs
    have hEZ : E.mem Z := subFam_mem_E E (h? h?z) hZz
    exact ⟨?s, h?s, subFam_inter_closed E (h? h?s) hXs hYs (E.inter_mem hEX hEY hEZ
    hsub)⟩
  sub_master := by
    intro X hX
    obtain ⟨?, h?, hX?⟩ := hX
    exact E.sub_master (subFam_mem_E E (h? h?) hX?)

theorem unionSys_nbset (E : NeighborhoodSystem α) (? : Set (Set (Set α)))
    (hne : ?.Nonempty) (h? : ? ⊆ subFam E) (hdir : DirectedOn (· ⊆ ·) ?) :
    {X | (unionSys E ? hne h? hdir).mem X} = ⋃₀ ? := by
  ext X
  exact Set.mem_sUnion.symm

theorem unionSys_subsystem (E : NeighborhoodSystem α) (? : Set (Set (Set α)))
    (hne : ?.Nonempty) (h? : ? ⊆ subFam E) (hdir : DirectedOn (· ⊆ ·) ?) :
    unionSys E ? hne h? hdir ? E where
  master_eq := rfl
  sub := by
```

```
    intro X hX
    obtain ⟨?, h?, hX?⟩ := hX
    exact subFam_mem_E E (h? h?) hX?
  inter_closed := by
    intro X Y hX hY hEXY
    obtain ⟨?x, h?x, hXx⟩ := hX
    obtain ⟨?y, h?y, hYy⟩ := hY
    obtain ⟨?s, h?s, hxs, hys⟩ := hdir ?x h?x ?y h?y
    exact ⟨?s, h?s, subFam_inter_closed E (h? h?s) (hxs hXx) (hys hYy) hEXY⟩

theorem subFam_sUnion_mem (E : NeighborhoodSystem α) (? : Set (Set (Set α)))
    (hne : ?.Nonempty) (h? : ? ⊆ subFam E) (hdir : DirectedOn (· ⊆ ·) ?) :
    ⋃₀ ? ∈ subFam E :=
  ⟨unionSys E ? hne h? hdir, unionSys_subsystem E ? hne h? hdir,
    (unionSys_nbset E ? hne h? hdir).symm⟩
end
end DomainTheory.NeighbourhoodSystems.Proposition611

section
namespace DomainTheory.NeighbourhoodSystems.Proposition611
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem Set DomainTheory.
   NeighbourhoodSystems.Exercise222
section
variable {α : Type*}

def subsystemReprIso (E : NeighborhoodSystem α) :
    {D : NeighborhoodSystem α // D ? E} ≃o
      (reprSystem (subFam E) (subFam_sInter_mem E) (subFam_nonempty E)).Element :=
  (subIso E).trans
    (reprIso (subFam E) (subFam_sInter_mem E) (subFam_nonempty E) (subFam_sUnion_mem E
    )).symm
end

end DomainTheory.NeighbourhoodSystems.Proposition611
end
```

3.7.13 Proposition 6.12 — projection pair

Proposition_6_12.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_29

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α β : Type*} {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}

theorem Subsystem.trianglelefteq {D E : NeighborhoodSystem α} (h : D ? E) : D ? E :=
  ⟨D, h, Isomorphic.refl D⟩
```

```
end
end DomainTheory.NeighbourhoodSystems
end
```

PROPOSITION 6.12. If $D \triangleleft E$, then there exists a projection pair of approximable mappings:

$$i : D \to E \quad \text{and} \quad j : E \to D$$

where $j \circ i = I_D$ and $i \circ j \subseteq I_E$, which are determined as element-wise functions by these equations:

$$i(x) = \{Y \in E \mid \exists X \in x.\, X \subseteq Y\},$$

and

$$j(y) = y \cap D,$$

for all $x \in |D|$ and $y \in |E|$. $\square$
The proof is left for the exercises.

3.7.14 Definition 6.13 — continuity on domains

Definition_6_13.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Theorem_6_9

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
universe w

def MonotoneOnDomains (T : Endofunctor DomainObj.{w}) : Prop :=
  ∀ {α : Type w} {D E : NeighborhoodSystem α} (h : D ? E), MonotoneAt T h

def targetFam (T : Endofunctor DomainObj.{w}) (hmono : MonotoneOnDomains T)
    {α : Type w} {D E : NeighborhoodSystem α} (h : D ? E) :
    Set (Set (T.obj ⟨α, E⟩).carrier) :=
  {Y | (T.obj ⟨α, D⟩).sys.mem ((hmono h).carrier_eq ▸ Y)}

def ContinuousOnDomains (T : Endofunctor DomainObj.{w}) : Prop :=
  ∃ hmono : MonotoneOnDomains T,
    ∀ {α : Type w} {E : NeighborhoodSystem α}
      (? : Set (NeighborhoodSystem α)) (h? : ∀ {{D}}, D ∈ ? → D ? E)
      (_hne : ?.Nonempty) (_hdir : DirectedOn (· ? ·) ?)
      {U : NeighborhoodSystem α} (hUE : U ? E)
      (_hU : ∀ X, U.mem X ↔ ∃ D ∈ ?, D.mem X),
      targetFam T hmono hUE = ⋃ D, ⋃ hD : D ∈ ?, targetFam T hmono (h? hD)

end
```

```
section

theorem monotoneOnDomains_id : MonotoneOnDomains (idEndofunctor DomainObj.{w}) := by
  intro α D E h
  exact ⟨rfl, h, HEq.rfl, HEq.rfl⟩
end

section

theorem continuousOnDomains_id : ContinuousOnDomains (idEndofunctor DomainObj.{w}) :=
    by
  refine ⟨monotoneOnDomains_id, ?_⟩
  intro α E ? h? _hne _hdir U hUE hU
  apply Set.ext
  intro Y
  simp only [targetFam, Set.mem_iUnion, exists_prop]
  exact hU Y
end

namespace Exercise619
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise619
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB
open DomainTheory.NeighbourhoodSystems.Exercise510

section

structure ScottSys where

  sys : NeighborhoodSystem Str

  ne : ∀ X, sys.mem X → X.Nonempty
end

end Exercise619
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise619
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB
open DomainTheory.NeighbourhoodSystems.Exercise510

section
namespace Exercise619

variable {A₀ A₁ B₀ B₁ C₀ C₁ : ScottSys}

inductive FExpr where
  | const : ScottSys → FExpr
  | var : FExpr
  | sum : FExpr → FExpr → FExpr
  | prod : FExpr → FExpr → FExpr

theorem embBit_not_subset_cross {b b' : Bool} (h : b = b') {X Y : Set Str} (hX : X.
    Nonempty)
    (hsub : embBit b X ⊆ embBit b' Y) : False := by
  obtain ⟨t, ht⟩ := hX
```

```
  obtain ⟨w', he, -⟩ := hsub ⟨t, rfl, ht⟩
  simp only [List.cons.injEq] at he
  exact h he.1

end Exercise619
end

section
namespace Exercise619

def ScottSys.prod (A₀ A₁ : ScottSys) : ScottSys :=
  ⟨prodTok A₀.sys A₁.sys, prodTok_nonempty⟩

end Exercise619
end

section
namespace Exercise619

variable {A₀ A₁ B₀ B₁ C₀ C₁ : ScottSys}

def prodMapTok (f₀ : ApproximableMap A₀.sys B₀.sys) (f₁ : ApproximableMap A₁.sys B₁.sys)
    :
    ApproximableMap (A₀.prod A₁).sys (B₀.prod B₁).sys where
  rel W W' := ∃ X Y X' Y', f₀.rel X X' ∧ f₁.rel Y Y' ∧
    W = prodTokNbhd X Y ∧ W' = prodTokNbhd X' Y'
  rel_dom := by
    rintro W W' ⟨X, Y, X', Y', h0, h1, rfl, -⟩
    exact prodTok_mem_prodTokNbhd (f₀.rel_dom h0) (f₁.rel_dom h1)
  rel_cod := by
    rintro W W' ⟨X, Y, X', Y', h0, h1, -, rfl⟩
    exact prodTok_mem_prodTokNbhd (f₀.rel_cod h0) (f₁.rel_cod h1)
  master_rel :=
    ⟨A₀.sys.master, A₁.sys.master, B₀.sys.master, B₁.sys.master,
      f₀.master_rel, f₁.master_rel, rfl, rfl⟩
  inter_right := by
    rintro W W'₁ W'₂ ⟨X, Y, X', Y', h0, h1, rfl, rfl⟩ ⟨X₂, Y₂, X'₂, Y'₂, h0₂, h1₂, hWeq,
    rfl⟩
    obtain ⟨rfl, rfl⟩ := prodTokNbhd_injective hWeq
    exact ⟨X, Y, X' ∩ X'₂, Y' ∩ Y'₂, f₀.inter_right h0 h0₂, f₁.inter_right h1 h1₂, rfl,
      prodTokNbhd_inter X' X'₂ Y' Y'₂⟩
  mono := by
    rintro W W'' Z Z' ⟨X, Y, X', Y', h0, h1, rfl, rfl⟩ hWW hZZ' hW'' hZ'
    obtain ⟨X₂, Y₂, hX₂, hY₂, rfl⟩ := hW''
    obtain ⟨X'₃, Y'₃, hX'₃, hY'₃, rfl⟩ := hZ'
    obtain ⟨hsX, hsY⟩ := prodTokNbhd_subset_iff.mp hWW
    obtain ⟨hsX', hsY'⟩ := prodTokNbhd_subset_iff.mp hZZ'
    exact ⟨X₂, Y₂, X'₃, Y'₃, f₀.mono h0 hsX hsX' hX₂ hX'₃, f₁.mono h1 hsY hsY' hY₂ hY'₃,
    rfl, rfl⟩

def singletonSys (Γ : Set Str) (h : Γ.Nonempty) : ScottSys where
  sys :=
    { mem := fun X => X = Γ
      master := Γ
      master_nonempty := h
      master_mem := rfl
```

```
      inter_mem := by
        intro X Y Z hX hY _ _
        show X ∩ Y = Γ
        rw [hX, hY, Set.inter_self]
      sub_master := by intro X hX; rw [show X = Γ from hX] }
  ne := by intro X hX; rw [show X = Γ from hX]; exact h

end Exercise619
end

section
namespace Exercise619

def ScottSys.sum (A₀ A₁ : ScottSys) : ScottSys :=
  ⟨sumTok A₀.sys A₁.sys A₀.ne A₁.ne, sumTok_nonempty⟩

end Exercise619
end

section
namespace Exercise619

variable {A₀ A₁ B₀ B₁ C₀ C₁ : ScottSys}

def FExpr.RootedConst : FExpr → Prop
  | .const C => ([] : Str) ∈ C.sys.master
  | .var => True
  | .sum a b => a.RootedConst ∧ b.RootedConst
  | .prod a b => a.RootedConst ∧ b.RootedConst

def mFun : FExpr → Set Str → Set Str
  | .const C, _ => C.sys.master
  | .var, Γ => Γ
  | .sum T₀ T₁, Γ => insert ([] : Str) (embBit false (mFun T₀ Γ) ∪ embBit true (mFun T₁
    Γ))
  | .prod T₀ T₁, Γ => insert ([] : Str) (embBit false (mFun T₀ Γ) ∪ embBit true (mFun T
    ₁ Γ))

def mIter (T : FExpr) : ℕ → Set Str
  | 0 => {([] : Str)}
  | n + 1 => mFun T (mIter T n)

def FExpr.obj : FExpr → ScottSys → ScottSys
  | .const D, _ => D
  | .var, X => X
  | .sum T₀ T₁, X => (T₀.obj X).sum (T₁.obj X)
  | .prod T₀ T₁, X => (T₀.obj X).prod (T₁.obj X)

def sumMapTok (f₀ : ApproximableMap A₀.sys B₀.sys) (f₁ : ApproximableMap A₁.sys B₁.sys)
    :
    ApproximableMap (A₀.sum A₁).sys (B₀.sum B₁).sys where
  rel W W' :=
    ((sumTok A₀.sys A₁.sys A₀.ne A₁.ne).mem W ∧ W' = sumTokMaster B₀.sys B₁.sys) ∨
    (∃ X X', f₀.rel X X' ∧ W = embBit false X ∧ W' = embBit false X') ∨
    (∃ Y Y', f₁.rel Y Y' ∧ W = embBit true Y ∧ W' = embBit true Y')
  rel_dom := by
```

```
  rintro W W' (⟨hW, -⟩ | ⟨X, X', hrel, rfl, -⟩ | ⟨Y, Y', hrel, rfl, -⟩)
  · exact hW
  · exact Or.inr (Or.inl ⟨X, f₀.rel_dom hrel, rfl⟩)
  · exact Or.inr (Or.inr ⟨Y, f₁.rel_dom hrel, rfl⟩)
rel_cod := by
  rintro W W' (⟨-, rfl⟩ | ⟨X, X', hrel, -, rfl⟩ | ⟨Y, Y', hrel, -, rfl⟩)
  · exact Or.inl rfl
  · exact Or.inr (Or.inl ⟨X', f₀.rel_cod hrel, rfl⟩)
  · exact Or.inr (Or.inr ⟨Y', f₁.rel_cod hrel, rfl⟩)
master_rel := Or.inl ⟨(A₀.sum A₁).sys.master_mem, rfl⟩
inter_right := by
  rintro W W'₁ W'₂ h1 h2
  rcases h1 with ⟨hW, rfl⟩ | ⟨X, X', hrel, rfl, rfl⟩ | ⟨Y, Y', hrel, rfl, rfl⟩
  · rcases h2 with ⟨-, rfl⟩ | ⟨X, X', hrel, hWeq, rfl⟩ | ⟨Y, Y', hrel, hWeq, rfl⟩
    · exact Or.inl ⟨hW, by rw [Set.inter_self]⟩
    · exact Or.inr (Or.inl ⟨X, X', hrel, hWeq, by rw [sumTokMaster_inter_embF (f₀.
  rel_cod hrel)]⟩)
    · exact Or.inr (Or.inr ⟨Y, Y', hrel, hWeq, by rw [sumTokMaster_inter_embT (f₁.
  rel_cod hrel)]⟩)
  · rcases h2 with ⟨-, rfl⟩ | ⟨X₂, X'₂, hrel₂, hWeq, rfl⟩ | ⟨Y₂, Y'₂, hrel₂, hWeq, rfl⟩
    · refine Or.inr (Or.inl ⟨X, X', hrel, rfl, ?_⟩)
      rw [Set.inter_comm, sumTokMaster_inter_embF (f₀.rel_cod hrel)]
    · obtain rfl := embBit_injective hWeq
      exact Or.inr (Or.inl ⟨X, X' ∩ X'₂, f₀.inter_right hrel hrel₂, rfl, embBit_inter
   false X' X'₂⟩)
    · exact absurd hWeq (embBit_ne (by decide) (A₀.ne X (f₀.rel_dom hrel)))
  · rcases h2 with ⟨-, rfl⟩ | ⟨X₂, X'₂, hrel₂, hWeq, rfl⟩ | ⟨Y₂, Y'₂, hrel₂, hWeq, rfl⟩
    · refine Or.inr (Or.inr ⟨Y, Y', hrel, rfl, ?_⟩)
      rw [Set.inter_comm, sumTokMaster_inter_embT (f₁.rel_cod hrel)]
    · exact absurd hWeq (embBit_ne (by decide) (A₁.ne Y (f₁.rel_dom hrel)))
    · obtain rfl := embBit_injective hWeq
      exact Or.inr (Or.inr ⟨Y, Y' ∩ Y'₂, f₁.inter_right hrel hrel₂, rfl, embBit_inter
   true Y' Y'₂⟩)
mono := by
  rintro W W'' Z Z' h hWW hZZ' hW'' hZ'
  rcases h with ⟨-, rfl⟩ | ⟨X, X', hrel, rfl, rfl⟩ | ⟨Y, Y', hrel, rfl, rfl⟩
  ·
    exact Or.inl ⟨hW'', Set.Subset.antisymm ((B₀.sum B₁).sys.sub_master hZ') hZZ'⟩
  ·
    rcases hZ' with rfl | ⟨X₃, hX₃, rfl⟩ | ⟨Y₃, hY₃, rfl⟩
    · exact Or.inl ⟨hW'', rfl⟩
    · rcases hW'' with rfl | ⟨X₂, hX₂, rfl⟩ | ⟨Y₂, hY₂, rfl⟩
      · exact absurd (hWW nil_mem_sumTokMaster) nil_not_mem_embBit
      · exact Or.inr (Or.inl ⟨X₂, X₃,
          f₀.mono hrel (embBit_subset.mp hWW) (embBit_subset.mp hZZ') hX₂ hX₃, rfl,
  rfl⟩)
      · exact absurd hWW (fun hsub => embBit_not_subset_cross (by decide) (A₁.ne Y₂
  hY₂) hsub)
    · exact absurd hZZ' (fun hsub =>
        embBit_not_subset_cross (by decide) (B₀.ne X' (f₀.rel_cod hrel)) hsub)
  ·
    rcases hZ' with rfl | ⟨X₃, hX₃, rfl⟩ | ⟨Y₃, hY₃, rfl⟩
    · exact Or.inl ⟨hW'', rfl⟩
    · exact absurd hZZ' (fun hsub =>
        embBit_not_subset_cross (by decide) (B₁.ne Y' (f₁.rel_cod hrel)) hsub)
    · rcases hW'' with rfl | ⟨X₂, hX₂, rfl⟩ | ⟨Y₂, hY₂, rfl⟩
```

```
        · exact absurd (hWW nil_mem_sumTokMaster) nil_not_mem_embBit
        · exact absurd hWW (fun hsub => embBit_not_subset_cross (by decide) (A₀.ne X₂
    hX₂) hsub)
        · exact Or.inr (Or.inr ⟨Y₂, Y₃,
            f₁.mono hrel (embBit_subset.mp hWW) (embBit_subset.mp hZZ') hY₂ hY₃, rfl,
    rfl⟩)

def FExpr.map : (T : FExpr) → {X Y : ScottSys} → ApproximableMap X.sys Y.sys →
    ApproximableMap (T.obj X).sys (T.obj Y).sys
  | .const D, _, _, _ => idMap D.sys
  | .var, _, _, f => f
  | .sum T₀ T₁, _, _, f => sumMapTok (T₀.map f) (T₁.map f)
  | .prod T₀ T₁, _, _, f => prodMapTok (T₀.map f) (T₁.map f)

def ScottSys.tok (D : ScottSys) : Set Str := D.sys.master

theorem mFun_eq_master : (T : FExpr) → {Γ : Set Str} → (h : Γ.Nonempty) →
    mFun T Γ = (T.obj (singletonSys Γ h)).sys.master
  | .const _, _, _ => rfl
  | .var, _, _ => rfl
  | .sum T₀ T₁, Γ, h => by
      show insert ([] : Str) (embBit false (mFun T₀ Γ) ∪ embBit true (mFun T₁ Γ))
        = insert ([] : Str) (embBit false ((T₀.obj (singletonSys Γ h)).sys.master)
            ∪ embBit true ((T₁.obj (singletonSys Γ h)).sys.master))
      rw [mFun_eq_master T₀ h, mFun_eq_master T₁ h]
  | .prod T₀ T₁, Γ, h => by
      show insert ([] : Str) (embBit false (mFun T₀ Γ) ∪ embBit true (mFun T₁ Γ))
        = insert ([] : Str) (embBit false ((T₀.obj (singletonSys Γ h)).sys.master)
            ∪ embBit true ((T₁.obj (singletonSys Γ h)).sys.master))
      rw [mFun_eq_master T₀ h, mFun_eq_master T₁ h]

theorem insertTag_mono {p q p' q' : Set Str} (hp : p ⊆ p') (hq : q ⊆ q') :
    insert ([] : Str) (embBit false p ∪ embBit true q)
      ⊆ insert ([] : Str) (embBit false p' ∪ embBit true q') := by
  rintro w (rfl | hw | hw)
  · exact Or.inl rfl
  · obtain ⟨w', rfl, hw'⟩ := hw
    exact Or.inr (Or.inl ⟨w', rfl, hp hw'⟩)
  · obtain ⟨w', rfl, hw'⟩ := hw
    exact Or.inr (Or.inr ⟨w', rfl, hq hw'⟩)

theorem mFun_mono (T : FExpr) {Γ Γ' : Set Str} (h : Γ ⊆ Γ') : mFun T Γ ⊆ mFun T Γ' :=
     by
  induction T with
  | const C => exact subset_rfl
  | var => exact h
  | sum T₀ T₁ ih₀ ih₁ => exact insertTag_mono ih₀ ih₁
  | prod T₀ T₁ ih₀ ih₁ => exact insertTag_mono ih₀ ih₁

theorem insertTag_continuous {? : Set (Set Str)} {U : Set Str} (hne : ?.Nonempty)
    {p q : Set Str → Set Str}
    (hp : ∀ w, w ∈ p U ↔ ∃ Γ ∈ ?, w ∈ p Γ)
    (hq : ∀ w, w ∈ q U ↔ ∃ Γ ∈ ?, w ∈ q Γ) (w : Str) :
    (w ∈ insert ([] : Str) (embBit false (p U) ∪ embBit true (q U)))
      ↔ ∃ Γ ∈ ?, w ∈ insert ([] : Str) (embBit false (p Γ) ∪ embBit true (q Γ)) := by
  simp only [Set.mem_insert_iff, Set.mem_union]
```

```
  constructor
  · rintro (rfl | hw | hw)
    · obtain ⟨Γ, hΓ⟩ := hne; exact ⟨Γ, hΓ, Or.inl rfl⟩
    · obtain ⟨w', rfl, hw'⟩ := hw
      obtain ⟨Γ, hΓ, hpΓ⟩ := (hp w').mp hw'
      exact ⟨Γ, hΓ, Or.inr (Or.inl ⟨w', rfl, hpΓ⟩)⟩
    · obtain ⟨w', rfl, hw'⟩ := hw
      obtain ⟨Γ, hΓ, hqΓ⟩ := (hq w').mp hw'
      exact ⟨Γ, hΓ, Or.inr (Or.inr ⟨w', rfl, hqΓ⟩)⟩
  · rintro ⟨Γ, hΓ, (rfl | hw | hw)⟩
    · exact Or.inl rfl
    · obtain ⟨w', rfl, hw'⟩ := hw
      exact Or.inr (Or.inl ⟨w', rfl, (hp w').mpr ⟨Γ, hΓ, hw'⟩⟩)
    · obtain ⟨w', rfl, hw'⟩ := hw
      exact Or.inr (Or.inr ⟨w', rfl, (hq w').mpr ⟨Γ, hΓ, hw'⟩⟩)

theorem mFun_continuous (T : FExpr) {? : Set (Set Str)} {U : Set Str}
    (_hdir : DirectedOn (· ⊆ ·) ?) (hne : ?.Nonempty)
    (hU : ∀ w, w ∈ U ↔ ∃ Γ ∈ ?, w ∈ Γ) :
    ∀ w, w ∈ mFun T U ↔ ∃ Γ ∈ ?, w ∈ mFun T Γ := by
  induction T with
  | const C =>
      intro w
      exact ⟨fun hw => let ⟨Γ, hΓ⟩ := hne; ⟨Γ, hΓ, hw⟩, fun ⟨_, _, hw⟩ => hw⟩
  | var => intro w; exact hU w
  | sum T₀ T₁ ih₀ ih₁ => intro w; exact insertTag_continuous hne ih₀ ih₁ w
  | prod T₀ T₁ ih₀ ih₁ => intro w; exact insertTag_continuous hne ih₀ ih₁ w

theorem mFun_nil_mem : ∀ (T : FExpr), T.RootedConst → {Γ : Set Str} →
    ([] : Str) ∈ Γ → ([] : Str) ∈ mFun T Γ
  | .const _, hC, _, _ => hC
  | .var, _, _, hΓ => hΓ
  | .sum _ _, _, _, _, _ => Set.mem_insert _ _
  | .prod _ _, _, _, _, _ => Set.mem_insert _ _

theorem nil_mem_mIter (T : FExpr) (hT : T.RootedConst) : ∀ n, ([] : Str) ∈ mIter T n
  | 0 => rfl
  | n + 1 => mFun_nil_mem T hT (nil_mem_mIter T hT n)

theorem mIter_mono_step (T : FExpr) (hT : T.RootedConst) :
    ∀ n, mIter T n ⊆ mIter T (n + 1)
  | 0 => by
      intro w hw
      have hw' : w = [] := hw
      subst hw'
      exact mFun_nil_mem T hT rfl
  | n + 1 => mFun_mono T (mIter_mono_step T hT n)

theorem mIter_mono (T : FExpr) (hT : T.RootedConst) {m n : ℕ} (hmn : m ≤ n) :
    mIter T m ⊆ mIter T n := by
  induction hmn with
  | refl => exact subset_rfl
  | step _ ih => intro x hx; exact mIter_mono_step T hT _ (ih hx)

theorem mFun_iter_fixed (T : FExpr) (hT : T.RootedConst) :
    mFun T (⋃ n, mIter T n) = ⋃ n, mIter T n := by
```

```
  have hstep := mIter_mono_step T hT
  have hne : (Set.range (mIter T)).Nonempty := ⟨mIter T 0, 0, rfl⟩
  have hdir : DirectedOn (· ⊆ ·) (Set.range (mIter T)) := by
    rintro _ ⟨i, rfl⟩ _ ⟨j, rfl⟩
    exact ⟨mIter T (max i j), ⟨max i j, rfl⟩,
      mIter_mono T hT (le_max_left i j), mIter_mono T hT (le_max_right i j)⟩
  have hU : ∀ v, v ∈ (⋃ n, mIter T n) ↔ ∃ S ∈ Set.range (mIter T), v ∈ S := by
    intro v
    constructor
    · intro hv; rw [Set.mem_iUnion] at hv; obtain ⟨n, hn⟩ := hv
      exact ⟨mIter T n, ⟨n, rfl⟩, hn⟩
    · rintro ⟨S, ⟨n, rfl⟩, hv⟩; exact Set.mem_iUnion.mpr ⟨n, hv⟩
  apply Set.ext; intro w
  rw [mFun_continuous T hdir hne hU w]
  constructor
  · rintro ⟨S, ⟨n, rfl⟩, hwS⟩; exact Set.mem_iUnion.mpr ⟨n + 1, hwS⟩
  · intro hw
    rw [Set.mem_iUnion] at hw; obtain ⟨n, hn⟩ := hw
    exact ⟨mIter T n, ⟨n, rfl⟩, hstep n hn⟩

end Exercise619
end
end DomainTheory.NeighbourhoodSystems
end
```

DEFINITION 6.13. A functor T is *monotone on domains* iff whenever $D \triangleleft E$, then not only do we have $T(D) \triangleleft T(E)$ but the projection pair i, j of 6.12 is mapped to the same kind of projection pair $T(i), T(j)$. A monotone functor is *continuous on domains* iff whenever E is a domain, then the mapping

$$\lambda D.\, T(D) : \{D \mid D \triangleleft E\} \to \{D' \mid D' \triangleleft T(E)\}$$

is approximable. □

We can now state an existence theorem that covers in fairly wide generality the examples of this lecture.

3.7.15 Theorem 6.14 — existence of initial algebras

Theorem_6_14.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_27

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Proposition_6_6
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510
section
universe w
namespace Theorem614
variable {α : Type w}
```

```
theorem exists_algebra_with_hom (s : Setup.{w}) :
    ∃ A : TAlgebra s.T, Nonempty (Iso (s.T.obj A.carrier) A.carrier) ∧
      ∀ B : TAlgebra s.T, IsStrict B.str → Nonempty (AlgHom A B) :=
  ⟨colimAlg s, ⟨colimIso s⟩, fun B hk => nonempty_algHom s B hk⟩

theorem rho_zero_rel (s : Setup.{w}) (hΓ : ∀ X, s.Γ.mem X → X = s.Γ.master)
    {X Y : Set s.Tok} :
    (rho s 0).rel X Y ↔ (colim s).mem X ∧ Y = (colim s).master := by
  rw [rho_rel]
  constructor
  · rintro ⟨hcX, hcY, z, hz, _, hzY⟩
    have hzm : z = s.Γ.master := hΓ z hz
    subst hzm
    refine ⟨hcX, Set.Subset.antisymm ((colim s).sub_master hcY) ?_⟩
    rw [colim_master]; exact hzY
  · rintro ⟨hcX, rfl⟩
    refine ⟨hcX, (colim s).master_mem, s.Γ.master, s.Γ.master_mem, ?_, ?_⟩
    · have h := (colim s).sub_master hcX; rwa [colim_master] at h
    · rw [colim_master]

theorem strict_rel_master {β₀ β₁ : Type w} {V₀ : NeighborhoodSystem β₀}
    {V₁ : NeighborhoodSystem β₁} {g : ApproximableMap V₀ V₁} (hg : IsStrict g) {Z : Set
     β₁} :
    g.rel V₀.master Z ↔ Z = V₁.master :=
  ⟨fun h => hg h, fun h => h ▸ g.master_rel⟩

theorem gcomp_rho_zero_rel (s : Setup.{w}) (hΓ : ∀ X, s.Γ.mem X → X = s.Γ.master)
    (B : TAlgebra s.T) {g : ApproximableMap (colim s) B.carrier.sys} (hg : IsStrict g)
    {X : Set s.Tok} {Z : Set B.carrier.carrier} :
    (g.comp (rho s 0)).rel X Z ↔ (colim s).mem X ∧ Z = B.carrier.sys.master := by
  rw [comp_rel]
  constructor
  · rintro ⟨Y, hrho, hgYZ⟩
    rw [rho_zero_rel s hΓ] at hrho
    obtain ⟨hcX, rfl⟩ := hrho
    exact ⟨hcX, (strict_rel_master hg).mp hgYZ⟩
  · rintro ⟨hcX, rfl⟩
    exact ⟨(colim s).master, (rho_zero_rel s hΓ).mpr ⟨hcX, rfl⟩, g.master_rel⟩

theorem gcomp_rho_zero_indep (s : Setup.{w}) (hΓ : ∀ X, s.Γ.mem X → X = s.Γ.master)
    (B : TAlgebra s.T) {g g' : ApproximableMap (colim s) B.carrier.sys}
    (hg : IsStrict g) (hg' : IsStrict g') :
    g.comp (rho s 0) = g'.comp (rho s 0) := by
  apply ApproximableMap.ext
  intro X Z
  rw [gcomp_rho_zero_rel s hΓ B hg, gcomp_rho_zero_rel s hΓ B hg']

theorem transport_heq {Obj : Type*} [Category Obj] {X Y : Obj} (e : X = Y)
    (f : (X ⟶ X)) : HEq (e ▸ f : (Y ⟶ Y)) f := by
  cases e; rfl

theorem key_rho (s : Setup.{w}) (n : ℕ) :
    rho s (n + 1) = (colimIso s).hom ? Tmap_rho s n ? (colimIso s).inv := by
  rw [show (colimIso s).hom = (isoOfEq (colimObj_eq s)).hom from rfl,
      show (colimIso s).inv = (isoOfEq (colimObj_eq s)).inv from rfl,
```

```
      isoOfEq_conj (colimObj_eq s) (Tmap_rho s n)]
  apply eq_of_heq
  exact HEq.trans (map_rho_heq s n).symm
    (transport_heq (colimObj_eq s) (Tmap_rho s n)).symm

theorem gcomp_rho_succ (s : Setup.{w}) (B : TAlgebra s.T) (g : AlgHom (colimAlg s) B)
    (n : ℕ) :
    g.hom.comp (rho s (n + 1))
      = B.str.comp ((s.T.map (X := objColim s) (Y := B.carrier)
          (g.hom.comp (rho s n))).comp (colimIso s).inv) := by
  have hcomm : g.hom ? (colimIso s).hom
      = B.str ? s.T.map (X := objColim s) (Y := B.carrier) g.hom := g.comm
  show g.hom ? rho s (n + 1)
      = B.str ? (s.T.map (X := objColim s) (Y := B.carrier) (g.hom ? rho s n)) ? (
    colimIso s).inv
  calc g.hom ? rho s (n + 1)
      = g.hom ? ((colimIso s).hom ? (Tmap_rho s n ? (colimIso s).inv)) :=
          congrArg (fun x => g.hom ? x) (key_rho s n)
    _ = (g.hom ? (colimIso s).hom) ? (Tmap_rho s n ? (colimIso s).inv) :=
          CategoryTheory.Category.assoc (Tmap_rho s n ? (colimIso s).inv) (colimIso s)
    .hom g.hom
    _ = (B.str ? s.T.map (X := objColim s) (Y := B.carrier) g.hom)
            ? (Tmap_rho s n ? (colimIso s).inv) := by rw [hcomm]
    _ = B.str ? (s.T.map (X := objColim s) (Y := B.carrier) g.hom
            ? (Tmap_rho s n ? (colimIso s).inv)) :=
          (CategoryTheory.Category.assoc (Tmap_rho s n ? (colimIso s).inv)
            (s.T.map (X := objColim s) (Y := B.carrier) g.hom) B.str).symm
    _ = B.str ? ((s.T.map (X := objColim s) (Y := B.carrier) g.hom ? Tmap_rho s n)
            ? (colimIso s).inv) :=
          congrArg (B.str ? ·)
            (CategoryTheory.Category.assoc (colimIso s).inv (Tmap_rho s n)
              (s.T.map (X := objColim s) (Y := B.carrier) g.hom))
    _ = B.str ? (s.T.map (X := objColim s) (Y := B.carrier) (g.hom ? rho s n)
            ? (colimIso s).inv) :=
          congrArg (fun m => B.str ? (m ? (colimIso s).inv))
            (s.T.map_comp (X := objColim s) (Y := objColim s) (Z := B.carrier) g.hom
              (rho s n)).symm

theorem gcomp_rho_indep (s : Setup.{w}) (hΓ : ∀ X, s.Γ.mem X → X = s.Γ.master)
    (B : TAlgebra s.T) (g g' : AlgHom (colimAlg s) B)
    (hg : IsStrict g.hom) (hg' : IsStrict g'.hom) (n : ℕ) :
    g.hom.comp (rho s n) = g'.hom.comp (rho s n) := by
  induction n with
  | zero => exact gcomp_rho_zero_indep s hΓ B hg hg'
  | succ k ih => rw [gcomp_rho_succ s B g k, gcomp_rho_succ s B g' k, ih]

theorem gcomp_eq (s : Setup.{w}) (hΓ : ∀ X, s.Γ.mem X → X = s.Γ.master)
    (B : TAlgebra s.T) (g g' : AlgHom (colimAlg s) B)
    (hg : IsStrict g.hom) (hg' : IsStrict g'.hom) :
    g.hom = g'.hom := by
  have key : g.hom.comp (iSupRho s) = g'.hom.comp (iSupRho s) := by
    apply ApproximableMap.ext
    intro X Z
    rw [comp_rel, comp_rel]
    constructor
    · rintro ⟨Y, ⟨n, hrho⟩, hgYZ⟩
```

```
      have hin : (g.hom.comp (rho s n)).rel X Z := ⟨Y, hrho, hgYZ⟩
      rw [gcomp_rho_indep s hΓ B g g' hg hg' n] at hin
      obtain ⟨Y', hrho', hgYZ'⟩ := hin
      exact ⟨Y', ⟨n, hrho'⟩, hgYZ'⟩
    · rintro ⟨Y, ⟨n, hrho⟩, hgYZ⟩
      have hin : (g'.hom.comp (rho s n)).rel X Z := ⟨Y, hrho, hgYZ⟩
      rw [← gcomp_rho_indep s hΓ B g g' hg hg' n] at hin
      obtain ⟨Y', hrho', hgYZ'⟩ := hin
      exact ⟨Y', ⟨n, hrho'⟩, hgYZ'⟩
  have e : g.hom.comp (idMap (colim s)) = g.hom := comp_idMap g.hom
  have e' : g'.hom.comp (idMap (colim s)) = g'.hom := comp_idMap g'.hom
  rw [← e, ← e', ← iSupRho_eq_id]
  exact key

theorem algHom_unique (s : Setup.{w}) (hΓ : ∀ X, s.Γ.mem X → X = s.Γ.master)
    (B : TAlgebra s.T) (g g' : AlgHom (colimAlg s) B)
    (hg : IsStrict g.hom) (hg' : IsStrict g'.hom) : g = g' :=
  algHom_ext (gcomp_eq s hΓ B g g' hg hg')

theorem exists_unique_strict_algHom (s : Setup.{w}) (hΓ : ∀ X, s.Γ.mem X → X = s.Γ.
    master)
    (B : TAlgebra s.T) (hk : IsStrict B.str) :
    ∃ g : AlgHom (colimAlg s) B, IsStrict g.hom ∧
      ∀ g' : AlgHom (colimAlg s) B, IsStrict g'.hom → g' = g := by
  obtain ⟨⟨g, hg⟩⟩ := nonempty_strict_algHom s B hk
  exact ⟨g, hg, fun g' hg' => algHom_unique s hΓ B g' g hg' hg⟩

end Theorem614
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Theorem614
section
set_option linter.unusedVariables false

theorem theorem_614.{w} : And
  (∀ (s : DomainTheory.NeighbourhoodSystems.Theorem614.Setup.{w}),
    ∃ (A :
      @DomainTheory.NeighbourhoodSystems.TAlgebra.{w + 1, w} DomainTheory.
    NeighbourhoodSystems.DomainObj.{w}
        DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T),
      And
        (Nonempty.{w + 1}
          (@DomainTheory.NeighbourhoodSystems.Iso.{w + 1, w} DomainTheory.
    NeighbourhoodSystems.DomainObj.{w}
            DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w}
            (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{w + 1, w}
              DomainTheory.NeighbourhoodSystems.DomainObj.{w}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
              (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T A))
            (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
              DomainTheory.NeighbourhoodSystems.DomainObj.{w}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T A)))
        (∀
```

```
       (B :
         @DomainTheory.NeighbourhoodSystems.TAlgebra.{w + 1, w} DomainTheory.
  NeighbourhoodSystems.DomainObj.{w}
           DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T),
       @DomainTheory.NeighbourhoodSystems.Exercise510.IsStrict.{w, w}
           (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{w + 1, w}
               DomainTheory.NeighbourhoodSystems.DomainObj.{w}
               DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
               (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                 DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                 DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B)
  ).carrier
           (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
               DomainTheory.NeighbourhoodSystems.DomainObj.{w}
               DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B).
  carrier
           (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{w + 1, w}
               DomainTheory.NeighbourhoodSystems.DomainObj.{w}
               DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
               (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                 DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                 DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B)
  ).sys
           (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
               DomainTheory.NeighbourhoodSystems.DomainObj.{w}
               DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B).
  sys
           (@DomainTheory.NeighbourhoodSystems.TAlgebra.str.{w + 1, w}
             DomainTheory.NeighbourhoodSystems.DomainObj.{w}
             DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B) →
         Nonempty.{w + 1}
           (@DomainTheory.NeighbourhoodSystems.AlgHom.{w + 1, w} DomainTheory.
  NeighbourhoodSystems.DomainObj.{w}
             DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T A B)))
(∀ (s : DomainTheory.NeighbourhoodSystems.Theorem614.Setup.{w}),
  (∀ (X : Set.{w} s.Tok),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem.{w} s.Tok s.Γ X →
        @Eq.{w + 1} (Set.{w} s.Tok) X (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.master.{w} s.Tok s.Γ)) →
    ∀
      (B :
        @DomainTheory.NeighbourhoodSystems.TAlgebra.{w + 1, w} DomainTheory.
  NeighbourhoodSystems.DomainObj.{w}
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T),
      @DomainTheory.NeighbourhoodSystems.Exercise510.IsStrict.{w, w}
          (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{w + 1, w}
              DomainTheory.NeighbourhoodSystems.DomainObj.{w}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
              (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B)).
  carrier
          (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
              DomainTheory.NeighbourhoodSystems.DomainObj.{w}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B).
  carrier
```

```
        (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{w + 1, w}
            DomainTheory.NeighbourhoodSystems.DomainObj.{w}
            DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
            (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
              DomainTheory.NeighbourhoodSystems.DomainObj.{w}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B)).
sys
        (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
            DomainTheory.NeighbourhoodSystems.DomainObj.{w}
            DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B).sys
        (@DomainTheory.NeighbourhoodSystems.TAlgebra.str.{w + 1, w} DomainTheory.
NeighbourhoodSystems.DomainObj.{w}
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B) →
      ∃ (g :
        @DomainTheory.NeighbourhoodSystems.AlgHom.{w + 1, w} DomainTheory.
NeighbourhoodSystems.DomainObj.{w}
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
          (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s) B),
        And
          (@DomainTheory.NeighbourhoodSystems.Exercise510.IsStrict.{w, w}
            (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
                (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s)).
carrier
            (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B)
.carrier
            (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
                (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s)).sys
            (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B)
.sys
            (@DomainTheory.NeighbourhoodSystems.AlgHom.hom.{w + 1, w}
              DomainTheory.NeighbourhoodSystems.DomainObj.{w}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
              (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s) B g))
          (∀
            (g' :
              @DomainTheory.NeighbourhoodSystems.AlgHom.{w + 1, w} DomainTheory.
NeighbourhoodSystems.DomainObj.{w}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
                (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s) B),
            @DomainTheory.NeighbourhoodSystems.Exercise510.IsStrict.{w, w}
                (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                    DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                    DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.
T
                    (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s))
.carrier
                (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                    DomainTheory.NeighbourhoodSystems.DomainObj.{w}
```

```
                      DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.
  T B).carrier
                  (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                      DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                      DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.
  T
                       (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s))
  .sys
                  (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                      DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                      DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.
  T B).sys
                  (@DomainTheory.NeighbourhoodSystems.AlgHom.hom.{w + 1, w}
                    DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                    DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
                     (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s) B
  g') →
                @Eq.{w + 1}
                  (@DomainTheory.NeighbourhoodSystems.AlgHom.{w + 1, w}
                    DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                    DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
                     (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s) B)
                   g' g)) :=
@And.intro
(∀ (s : DomainTheory.NeighbourhoodSystems.Theorem614.Setup.{w}),
  ∃ (A :
    @DomainTheory.NeighbourhoodSystems.TAlgebra.{w + 1, w} DomainTheory.
  NeighbourhoodSystems.DomainObj.{w}
      DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T),
    And
      (Nonempty.{w + 1}
        (@DomainTheory.NeighbourhoodSystems.Iso.{w + 1, w} DomainTheory.
  NeighbourhoodSystems.DomainObj.{w}
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w}
          (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{w + 1, w}
            DomainTheory.NeighbourhoodSystems.DomainObj.{w}
            DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
            (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
              DomainTheory.NeighbourhoodSystems.DomainObj.{w}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T A))
          (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
            DomainTheory.NeighbourhoodSystems.DomainObj.{w}
            DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T A)))
      (∀
        (B :
          @DomainTheory.NeighbourhoodSystems.TAlgebra.{w + 1, w} DomainTheory.
  NeighbourhoodSystems.DomainObj.{w}
            DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T),
        @DomainTheory.NeighbourhoodSystems.Exercise510.IsStrict.{w, w}
            (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{w + 1, w}
                DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
                (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                  DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                  DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B)
  ).carrier
```

```
           (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
               DomainTheory.NeighbourhoodSystems.DomainObj.{w}
               DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B).
 carrier
           (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{w + 1, w}
               DomainTheory.NeighbourhoodSystems.DomainObj.{w}
               DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
               (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                 DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                 DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B)
 ).sys
           (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
               DomainTheory.NeighbourhoodSystems.DomainObj.{w}
               DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B).
 sys
           (@DomainTheory.NeighbourhoodSystems.TAlgebra.str.{w + 1, w}
             DomainTheory.NeighbourhoodSystems.DomainObj.{w}
             DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B) →
         Nonempty.{w + 1}
           (@DomainTheory.NeighbourhoodSystems.AlgHom.{w + 1, w} DomainTheory.
 NeighbourhoodSystems.DomainObj.{w}
             DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T A B)))
(∀ (s : DomainTheory.NeighbourhoodSystems.Theorem614.Setup.{w}),
  (∀ (X : Set.{w} s.Tok),
     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem.{w} s.Tok s.Γ X →
       @Eq.{w + 1} (Set.{w} s.Tok) X (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.master.{w} s.Tok s.Γ)) →
    ∀
      (B :
        @DomainTheory.NeighbourhoodSystems.TAlgebra.{w + 1, w} DomainTheory.
 NeighbourhoodSystems.DomainObj.{w}
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T),
      @DomainTheory.NeighbourhoodSystems.Exercise510.IsStrict.{w, w}
          (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{w + 1, w}
              DomainTheory.NeighbourhoodSystems.DomainObj.{w}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
              (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B)).
 carrier
          (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
              DomainTheory.NeighbourhoodSystems.DomainObj.{w}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B).
 carrier
          (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{w + 1, w}
              DomainTheory.NeighbourhoodSystems.DomainObj.{w}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
              (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B)).
 sys
          (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
              DomainTheory.NeighbourhoodSystems.DomainObj.{w}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B).sys
          (@DomainTheory.NeighbourhoodSystems.TAlgebra.str.{w + 1, w} DomainTheory.
 NeighbourhoodSystems.DomainObj.{w}
```

```
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B) →
      ∃ (g :
        @DomainTheory.NeighbourhoodSystems.AlgHom.{w + 1, w} DomainTheory.
NeighbourhoodSystems.DomainObj.{w}
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
          (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s) B),
        And
          (@DomainTheory.NeighbourhoodSystems.Exercise510.IsStrict.{w, w}
            (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
                (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s)).
carrier
            (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B)
.carrier
            (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
                (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s)).sys
            (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T B)
.sys
            (@DomainTheory.NeighbourhoodSystems.AlgHom.hom.{w + 1, w}
              DomainTheory.NeighbourhoodSystems.DomainObj.{w}
              DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
              (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s) B g))
          (∀
            (g' :
              @DomainTheory.NeighbourhoodSystems.AlgHom.{w + 1, w} DomainTheory.
NeighbourhoodSystems.DomainObj.{w}
                DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
                (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s) B),
            @DomainTheory.NeighbourhoodSystems.Exercise510.IsStrict.{w, w}
                (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                    DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                    DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.
T
                    (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s))
.carrier
                (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                    DomainTheory.NeighbourhoodSystems.DomainObj.{w}


                    DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.
T B).carrier
                (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                    DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                    DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.
T
                    (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s))
.sys
                (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w}
                    DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                    DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.
```

```
    T B).sys
                    (@DomainTheory.NeighbourhoodSystems.AlgHom.hom.{w + 1, w}
                      DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                      DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
                      (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s) B
    g') →
                  @Eq.{w + 1}
                    (@DomainTheory.NeighbourhoodSystems.AlgHom.{w + 1, w}
                      DomainTheory.NeighbourhoodSystems.DomainObj.{w}
                      DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} s.T
                      (DomainTheory.NeighbourhoodSystems.Theorem614.colimAlg.{w} s) B)
                    g' g))
  DomainTheory.NeighbourhoodSystems.Theorem614.exists_algebra_with_hom.{w}
  DomainTheory.NeighbourhoodSystems.Theorem614.exists_unique_strict_algHom.{w}
end

end DomainTheory.NeighbourhoodSystems.Theorem614
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

open Example62C in

theorem sum3_nonempty {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ :
    NeighborhoodSystem β}
    {V₂ : NeighborhoodSystem ?} {h₀ : ∀ X, V₀.mem X → X.Nonempty}
    {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty} {h₂ : ∀ Z, V₂.mem Z → Z.Nonempty} :
    ∀ W, (sum3 V₀ V₁ V₂ h₀ h₁ h₂).mem W → W.Nonempty := by
  rintro W (rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩ | ⟨Z, hZ, rfl⟩)
  · exact ⟨none, none_mem_master3⟩
  · exact j0_nonempty (h₀ X hX)
  · exact j1_nonempty (h₁ Y hY)
  · exact j2_nonempty (h₂ Z hZ)
end

section
open NeighborhoodSystem

namespace Example61

variable {α : Type*}

section Equation

variable (D : NeighborhoodSystem α) (hD : ∀ X, D.mem X → X.Nonempty)

include hD

def sumSys : NeighborhoodSystem (Option (α ? ((List Bool × α) ? (List Bool × α)))) :=
  sum D (prod (Dsharp D hD) (Dsharp D hD)) hD (prod_dsharp_nonempty D hD)

theorem sumSys_mem_nonempty {W : Set (Option (α ? ((List Bool × α) ? (List Bool × α)))
    )}
    (h : (sumSys D hD).mem W) : W.Nonempty := by
  rcases h with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
  · exact ⟨none, none_mem_sumMaster⟩
```

```
  · exact inj₀_nonempty (hD X hX)
  · exact inj₁_nonempty (prod_dsharp_nonempty D hD Y hY)

theorem sum_mem_inj₀_inv {X : Set α} (h : (sumSys D hD).mem (inj₀ X)) : D.mem X := by
  rcases h with h0 | ⟨X', hX', heq⟩ | ⟨Y', hY', heq⟩
  · exact absurd (h0 ▶ none_mem_sumMaster) none_mem_inj₀
  · rw [inj₀_injective heq]; exact hX'
  · obtain ⟨b, hb⟩ := prod_dsharp_nonempty D hD Y' hY'
    exact absurd (heq ▶ ir_mem_inj₁.mpr hb) ir_mem_inj₀

theorem sum_mem_inj₁_inv {V : Set ((List Bool × α) ? (List Bool × α))}
    (h : (sumSys D hD).mem (inj₁ V)) : (prod (Dsharp D hD) (Dsharp D hD)).mem V := by
  rcases h with h0 | ⟨X', hX', heq⟩ | ⟨Y', hY', heq⟩
  · exact absurd (h0 ▶ none_mem_sumMaster) none_mem_inj₁
  · obtain ⟨a, ha⟩ := hD X' hX'
    exact absurd (heq ▶ il_mem_inj₀.mpr ha) il_mem_inj₁
  · rw [inj₁_injective heq]; exact hY'

end Equation

end Example61
end

section
universe u
variable {Obj : Type u} [Category Obj] {T : Endofunctor Obj}

abbrev tStr (A : TAlgebra T) : TAlgebra T where
  carrier := T.obj A.carrier
  str := T.map A.str

def strHom (A : TAlgebra T) : AlgHom (tStr A) A where
  hom := A.str
  comm := rfl

theorem str_comp_desc (A : TAlgebra T) (hA : IsInitial A) :
    A.str ? (hA.desc (tStr A)).hom = (? A.carrier) := by
  have h : (strHom A).comp (hA.desc (tStr A)) = AlgHom.id A := by
    rw [hA.uniq A ((strHom A).comp (hA.desc (tStr A))), hA.uniq A (AlgHom.id A)]
  exact congrArg AlgHom.hom h

end

section
set_option linter.unusedVariables false

theorem theorem_67.{u, u_1} : ∀ {Obj : Type u} [inst : CategoryTheory.Category.{u_1, u}
    Obj]
  {T : @DomainTheory.NeighbourhoodSystems.Endofunctor Obj inst}
  (A : @DomainTheory.NeighbourhoodSystems.TAlgebra Obj inst T)
  (hA : @DomainTheory.NeighbourhoodSystems.IsInitial Obj inst T A),
  @Eq
    (@Quiver.Hom Obj (@CategoryTheory.CategoryStruct.toQuiver Obj (@CategoryTheory.
    Category.toCategoryStruct Obj inst))
      (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier Obj inst T A)
      (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier Obj inst T A))
```

```
    (@DomainTheory.NeighbourhoodSystems.compAfter Obj inst
      (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier Obj inst T A)
      (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj Obj inst T
        (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier Obj inst T A))
      (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier Obj inst T A)
      (@DomainTheory.NeighbourhoodSystems.TAlgebra.str Obj inst T A)
      (@DomainTheory.NeighbourhoodSystems.AlgHom.hom Obj inst T A (@DomainTheory.
    NeighbourhoodSystems.tStr Obj inst T A)
        (@DomainTheory.NeighbourhoodSystems.IsInitial.desc Obj inst T A hA
          (@DomainTheory.NeighbourhoodSystems.tStr Obj inst T A))))
    (@CategoryTheory.CategoryStruct.id Obj (@CategoryTheory.Category.toCategoryStruct
    Obj inst)
      (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier Obj inst T A)) :=
  @DomainTheory.NeighbourhoodSystems.str_comp_desc
end

section
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

theorem botStrict_rel {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ :
    NeighborhoodSystem β}
    {X : Set α} {Y : Set β} :
    (toStrictMap (strictFun V₀ V₁).bot).1.rel X Y ↔ V₀.mem X ∧ Y = V₁.master := by
  rw [toStrictMap_rel, NeighborhoodSystem.mem_bot, strictFun_master]
  constructor
  · intro h
    have hcb : (⟨constMap V₀ V₁.bot, isStrict_constBot⟩ : StrictMap V₀ V₁) ∈ sstep X Y
    := by
      rw [h]; exact Set.mem_univ _
    rw [mem_sstep, constMap_rel, NeighborhoodSystem.mem_bot] at hcb
    exact hcb
  · rintro ⟨hX, rfl⟩
    exact sstep_cod_master hX

theorem opStep (T : Endofunctor DomainObj.{w}) (D E : DomainObj.{w})
    (j : ApproximableMap D.sys (T.obj D).sys) (k : ApproximableMap (T.obj E).sys E.sys
    )
    (hj : IsStrict j) (hk : IsStrict k)
    (? : ApproximableMap (strictFun D.sys E.sys) (strictFun (T.obj D).sys (T.obj E).
    sys))
    (h? : ∀ f : StrictMap D.sys E.sys,
      (toStrictMap (?.toElementMap (toStrictFilter f))).1 = T.map (X := D) (Y := E) f
    .1)
    (x : (strictFun D.sys E.sys).Element) :
    (toStrictMap (((homOp T D E j k hj hk).comp ?).toElementMap x)).1
      = k.comp ((T.map (X := D) (Y := E) (toStrictMap x).1).comp j) := by
  set h := toStrictMap x with hh
  have hx : toStrictFilter h = x := toStrictFilter_toStrictMap x
  have hφ : ?.toElementMap x
      = toStrictFilter (toStrictMap (?.toElementMap (toStrictFilter h))) := by
    rw [← hx]; exact (toStrictFilter_toStrictMap _).symm
  rw [toElementMap_comp, hφ, homOp_apply_filter, toStrictMap_toStrictFilter]
  show k.comp ((toStrictMap (?.toElementMap (toStrictFilter h))).1.comp j)
      = k.comp ((T.map (X := D) (Y := E) h.1).comp j)
  rw [h? h]
```

```
end

end DomainTheory.NeighbourhoodSystems
end
```

THEOREM 6.14. If the functor T is continuous on maps and monotone and continuous on domains, and if there is a set Γ such that

$$\{\Gamma\} \lhd T(\{\Gamma\}),$$

then there exists an initial T-algebra.

Proof: We proceed as in the proof of the fixed-point theorem by iterating the functor. The assumption about Γ means that, as a neighbourhood system, $T(\{\Gamma\})$ is a system over the same set Γ. Thus, if we iterate T to form $T^n(\{\Gamma\})$, all these systems are over Γ and indeed

$$T^n(\{\Gamma\}) \lhd T^{n+1}(\{\Gamma\})$$

for all n. We can thus introduce

$$\mathcal{D} = \bigcup_{n=0}^{\infty} T^n(\{\Gamma\}),$$

and it is easy to check that $\mathcal{D}$ is a system over Γ and

$$T^n(\{\Gamma\}) \lhd \mathcal{D}$$

holds for all n. But then we have for all n:

$$T^n(\{\Gamma\}) \lhd T^{n+1}(\{\Gamma\}) \lhd T(\mathcal{D}),$$

which implies $\mathcal{D} \lhd T(\mathcal{D})$. But T is continuous on domains, so

$$\begin{aligned} T(\mathcal{D}) &= T\left(\bigcup_{n=0}^{\infty} T^n(\{\Gamma\})\right) \\ &= \bigcup_{n=0}^{\infty} T^{n+1}(\{\Gamma\}) \\ &= \mathcal{D}. \end{aligned}$$

Thus, not only is $\mathcal{D}$ a T-algebra, but the isomorphism we get for $\mathcal{D}$ and $T(\mathcal{D})$ is just the identity mapping. We know by 6.9 that homomorphisms exist; what remains to show is that homomorphism from $\mathcal{D}$ are unique. As in the examples, we will show in effect they are determined uniquely on the finite elements of $\mathcal{D}$.

Since each $T^n(\{\Gamma\}) \lhd \mathcal{D}$, there are projection mappings $i_n : T^n(\{\Gamma\}) \to \mathcal{D}$ and $j_n : \mathcal{D} \to T^n(\{\Gamma\})$.

Define $\rho_n : \mathcal{D} \to \mathcal{D}$ by $\rho_n = i_n \circ j_n$. Projection pairs are always pairs of strict mappings (Why?), and so are in the category. By assumption and 6.13, the functor T preserves these maps, so we have

$$T(\rho_n) = T(i_n) \circ T(j_n) = i_{n+1} \circ j_{n+1} = \rho_{n+1}.$$

As a neighbourhood relation ρ_n can be characterized by :

$$X \rho_n Y \quad \text{iff} \quad \exists z \in T^n(\{\Gamma\}).\ X \subseteq z \subseteq Y.$$

We thus see that $\rho_n \subseteq \rho_{n+1}$ and

$$\bigcup_{n=0}^{\infty} \rho_n = I_{\mathcal{D}}.$$

Now suppose $k : T(E) \to E$ is any T-algebra and $h : \mathcal{D} \to E$ is a homomorphism. The mapping will satisfy the fixed-point equation

$$h = k \circ T(h),$$

where no other mappings need be written in because $\mathcal{D} = T(\mathcal{D})$ and so

$$T(h) : \mathcal{D} \to T(E).$$

We wish to show that h really is the least fixed point of this equation.

Define $h_n = h \circ \rho_n : \mathcal{D} \to E$. For $n = 0$, the map ρ_0 is the trivial map where $\rho_0(x) = \bot_{\mathcal{D}}$ for all $x \in |\mathcal{D}|$. But h must be strict, so $h_0(x) = \bot_E$ for all $x \in |\mathcal{D}|$; that is, h_0 is the least element of $|\mathcal{D} \to_\bot E|$. Now calculate :

$$\begin{aligned} k \circ T(h_n) &= k \circ T(h) \circ T(\rho_n) \\ &= h \circ \rho_{n+1} \\ &= h_{n+1}\ . \end{aligned}$$

This shows that the union of the h_n is the least fixed point of $\lambda h.\, k \circ T(h)$. But

$$\begin{aligned} \bigcup_{n=0}^{\infty} h_n &= \bigcup_{n=0}^{\infty} h \circ \rho_n \\ &= h \circ \bigcup_{n=0}^{\infty} \rho_n \\ &= h \circ I_D = h, \end{aligned}$$

so the given h is in fact the least fixed point. The homomorphism is uniquely determined, and D is the initial T-algebra. □

Having the existence of initial T-algebras, we can prove one more result that shows just how minimal they are. We need a lemma about projection pairs, first, that shows where sub-domains fit in. We write $D \trianglelefteq E$ as short for $D \cong D'$ for some $D' \triangleleft E$ in the following. The lemma gives a converse to 6.12.

3.7.16 Lemma 6.15 — subdomains from projection pairs

Lemma_6_15.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_29
```

```
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α β : Type*} {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}
section ProjectionPair
variable (i : ApproximableMap D E) (j : ApproximableMap E D)

theorem trianglelefteq_of_projectionPair (hji : j.comp i = idMap D)
    (hij : i.comp j ≤ idMap E) : D ? E :=
  ⟨Dprime i j, Dprime_subsystem i j, ⟨dprimeEquiv i j hji hij⟩⟩

end ProjectionPair
end

section
set_option linter.unusedVariables false

theorem theorem_615.{u_1, u_2} : ∀ {α : Type u_1} {β : Type u_2} {D : DomainTheory.
    NeighbourhoodSystems.NeighborhoodSystem α}
  {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (i : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β D E)
  (j : @DomainTheory.NeighbourhoodSystems.ApproximableMap β α E D),
  @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α D D)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α β α D E D j i)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap α D) →
    @LE.le (@DomainTheory.NeighbourhoodSystems.ApproximableMap β β E E)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.ApproximableMap β β E E)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    ApproximableMap β β E E)
            (@DomainTheory.NeighbourhoodSystems.instPartialOrderApproximableMap β β E
    E)))
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp β α β E D E i j)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap β E) →
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq α β D E :=
  @DomainTheory.NeighbourhoodSystems.trianglelefteq_of_projectionPair
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems
namespace Subsystem
open NeighborhoodSystem ApproximableMap

section
variable {α : Type*}
variable {D E : NeighborhoodSystem α}

structure ProjectionPair (D E : NeighborhoodSystem α) where

  inj : ApproximableMap D E

  proj : ApproximableMap E D

  proj_comp_inj : proj.comp inj = idMap D
```

```
  inj_comp_proj_le : inj.comp proj ≤ idMap E
end

end Subsystem
open NeighborhoodSystem ApproximableMap

section
variable {α : Type*}

namespace Subsystem

variable {D E : NeighborhoodSystem α}

def inj (h : D ? E) : ApproximableMap D E where
  rel X Y := D.mem X ∧ E.mem Y ∧ X ⊆ Y
  rel_dom hr := hr.1
  rel_cod hr := hr.2.1
  master_rel := ⟨D.master_mem, E.master_mem, h.master_eq.subset⟩
  inter_right := by
    rintro X Y Y' ⟨hX, hY, hXY⟩ ⟨_, hY', hXY'⟩
    exact ⟨hX, E.inter_mem hY hY' (h.sub hX) (Set.subset_inter hXY hXY'),
      Set.subset_inter hXY hXY'⟩
  mono := by
    rintro X X' Y Y' ⟨_, _, hXY⟩ hX'X hYY' hX' hY'
    exact ⟨hX', hY', (hX'X.trans hXY).trans hYY'⟩

@[simp] theorem inj_rel (h : D ? E) {X Y : Set α} :
    (h.inj).rel X Y ↔ D.mem X ∧ E.mem Y ∧ X ⊆ Y := Iff.rfl

def proj (h : D ? E) : ApproximableMap E D where
  rel Y X := E.mem Y ∧ D.mem X ∧ Y ⊆ X
  rel_dom hr := hr.1
  rel_cod hr := hr.2.1
  master_rel := ⟨E.master_mem, D.master_mem, h.master_eq.symm.subset⟩
  inter_right := by
    rintro Y X X' ⟨hY, hX, hYX⟩ ⟨_, hX', hYX'⟩
    have hEinter : E.mem (X ∩ X') :=
      E.inter_mem (h.sub hX) (h.sub hX') hY (Set.subset_inter hYX hYX')
    exact ⟨hY, h.inter_closed hX hX' hEinter, Set.subset_inter hYX hYX'⟩
  mono := by
    rintro Y Y' X X' ⟨_, _, hYX⟩ hY'Y hXX' hY' hX'
    exact ⟨hY', hX', (hY'Y.trans hYX).trans hXX'⟩

@[simp] theorem proj_rel (h : D ? E) {Y X : Set α} :
    (h.proj).rel Y X ↔ E.mem Y ∧ D.mem X ∧ Y ⊆ X := Iff.rfl

theorem inj_comp_proj_le (h : D ? E) : h.inj.comp h.proj ≤ idMap E := by
  intro Y Y' hr
  obtain ⟨X, ⟨hEY, _, hYX⟩, _, hEY', hXY'⟩ := hr
  exact ⟨hEY, hEY', hYX.trans hXY'⟩

theorem proj_comp_inj (h : D ? E) : h.proj.comp h.inj = idMap D := by
  apply ApproximableMap.ext
  intro X Z
  rw [comp_rel, idMap_rel]
```

```
  constructor
  · rintro ⟨Y, ⟨hX, _, hXY⟩, _, hZ, hYZ⟩
    exact ⟨hX, hZ, hXY.trans hYZ⟩
  · rintro ⟨hX, hZ, hXZ⟩
    exact ⟨Z, ⟨hX, h.sub hZ, hXZ⟩, h.sub hZ, hZ, subset_rfl⟩

end Subsystem
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Subsystem
section
set_option linter.unusedVariables false

theorem theorem_612.{u_1} : And
  (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (h : @DomainTheory.NeighbourhoodSystems.Subsystem α D E),
    @LE.le (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E)
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.ApproximableMap
    α α E E)
          (@DomainTheory.NeighbourhoodSystems.instPartialOrderApproximableMap α α E E)
    ))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α α α E D E
        (@DomainTheory.NeighbourhoodSystems.Subsystem.inj α D E h)
        (@DomainTheory.NeighbourhoodSystems.Subsystem.proj α D E h))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap α E))
  (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (h : @DomainTheory.NeighbourhoodSystems.Subsystem α D E),
    @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α D D)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α α α D E D
        (@DomainTheory.NeighbourhoodSystems.Subsystem.proj α D E h)
        (@DomainTheory.NeighbourhoodSystems.Subsystem.inj α D E h))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap α D)) :=
  @And.intro
  (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (h : @DomainTheory.NeighbourhoodSystems.Subsystem α D E),
    @LE.le (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E)
      (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E)
        (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.ApproximableMap
    α α E E)
          (@DomainTheory.NeighbourhoodSystems.instPartialOrderApproximableMap α α E E)
    ))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α α α E D E
        (@DomainTheory.NeighbourhoodSystems.Subsystem.inj α D E h)
        (@DomainTheory.NeighbourhoodSystems.Subsystem.proj α D E h))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap α E))
  (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (h : @DomainTheory.NeighbourhoodSystems.Subsystem α D E),
    @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α D D)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α α α D E D
        (@DomainTheory.NeighbourhoodSystems.Subsystem.proj α D E h)
        (@DomainTheory.NeighbourhoodSystems.Subsystem.inj α D E h))
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap α D))
  @DomainTheory.NeighbourhoodSystems.Subsystem.inj_comp_proj_le
  @DomainTheory.NeighbourhoodSystems.Subsystem.proj_comp_inj
```

```
end

end DomainTheory.NeighbourhoodSystems.Subsystem
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap Subsystem

section
variable {α : Type*} {D E : NeighborhoodSystem α}

namespace Subsystem.ProjectionPair

def lowerSet (P : ProjectionPair D E) (y : E.Element) : Set D.Element :=
  {x | P.inj.toElementMap x ≤ y}

@[simp] theorem mem_lowerSet (P : ProjectionPair D E) {y : E.Element} {x : D.Element}
    :
    x ∈ P.lowerSet y ↔ P.inj.toElementMap x ≤ y := Iff.rfl

def upperSet (P : ProjectionPair D E) (x : D.Element) : Set E.Element :=
  {y | x ≤ P.proj.toElementMap y}

@[simp] theorem mem_upperSet (P : ProjectionPair D E) {x : D.Element} {y : E.Element}
    :
    y ∈ P.upperSet x ↔ x ≤ P.proj.toElementMap y := Iff.rfl

end Subsystem.ProjectionPair
end
end DomainTheory.NeighbourhoodSystems
end
```

LEMMA 6.15. For two neighbourhood systems D and E, if there exist a projection pair

$$i : D \to E \quad \text{and} \quad j : E \to D$$

with $j \circ i = I_D$ and $i \circ j \subseteq I_E$, then $D \trianglelefteq E$.

Proof. What we want to show is that i maps finite elements to finite elements, and that the desired D' is the image of D in E.

Suppose $X \in D$. We can write:

$$i(\uparrow X) = \bigcup \{\uparrow Y \mid Y \in i(\uparrow X)\} \, .$$

Applying j to both sides we have:

$$\uparrow X = j \circ i(\uparrow X) = \bigcup \{j(\uparrow Y) \mid Y \in i(\uparrow X)\}.$$

But then, since $X \in \uparrow X$, we find $X \in j(\uparrow Y)$ for some $Y \in i(\uparrow X)$. This implies

$$\uparrow X \subseteq j(\uparrow Y); \text{ and so } i(\uparrow X) \subseteq i \circ j(\uparrow Y) \subseteq \uparrow Y.$$

Since $\uparrow Y \subseteq i(\uparrow X)$ in any case, we conclude $i(\uparrow X) = \uparrow Y$. This proves finite elements are mapped to finite elements.

What of Δ; that is, what is $i(\uparrow \Delta)$? We find, supposing E to be a neighbourhood system over a set Δ', that since $\uparrow \Delta \subseteq j(\uparrow \Delta')$, then $i(\uparrow \Delta) \subseteq \uparrow \Delta'$ and so $i(\uparrow \Delta) = \uparrow \Delta'$. This means that Δ corresponds to Δ'.

So we have established that $\mathcal{D}$ is in an inclusion preserving one-one correspondence with a subset $\mathcal{D}'$ of E where $\Delta' \in \mathcal{D}'$. But it remains to show that $\mathcal{D}'$ is a neighbourhood system and that $\mathcal{D}' \lhd E$ holds. All we really have to show is that $\mathcal{D}'$ is closed under intersection whenever the intersection belongs to E.

Suppose $Y', Z' \in \mathcal{D}'$ and $Y' \cap Z' \in E$. Let $X' = Y' \cap Z'$. We have, for suitable $Y, Z \in \mathcal{D}$,

$$i(\uparrow Y) = \uparrow Y', \text{ and so } \uparrow Y = j(\uparrow Y'); \text{ and}$$

$$i(\uparrow Z) = \uparrow Z', \text{ and so } \uparrow Z = j(\uparrow Z').$$

But $\uparrow Y' \subseteq \uparrow X'$ and $j(\uparrow Y') \subseteq j(\uparrow X')$; thus $Y \in j(\uparrow X')$. For similar reasons $Z \in j(\uparrow X')$. But then $X = Y \cap Z \in j(\uparrow X')$, and therefore $Y \cap Z \in \mathcal{D}$. (The element $j(\uparrow X')$ must be a filter.) Notice, however, that

$$\uparrow Y \subseteq \uparrow X, \text{ and so } \uparrow Y' \subseteq i(\uparrow X); \text{ and}$$

$$\uparrow Z \subseteq \uparrow X, \text{ and so } \uparrow Z' \subseteq i(\uparrow X).$$

It follows that $Y' \cap Z' = X' \in i(\uparrow X)$. On the other hand we already knew $X \in j(\uparrow X')$, which implies $i(\uparrow X) \subseteq \uparrow X'$. We may thus conclude that $i(\uparrow X) = \uparrow X'$. In other words $X' \in \mathcal{D}'$. □

3.7.17 Theorem 6.16 — initial algebra is minimal

Theorem_6_16.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_7

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Proposition_6_7
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Theorem_6_9

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510
universe w

theorem trianglelefteq_of_isInitial
    (T : Endofunctor DomainObj.{w}) (hT : ContinuousOnMaps T)
    (Dalg : TAlgebra T) (hinit : IsInitial Dalg)
    (E : DomainObj.{w}) (isoE : Iso (T.obj E) E) :
    Dalg.carrier.sys ? E.sys := by

  let isoD : Iso (T.obj Dalg.carrier) Dalg.carrier := lambek Dalg hinit

  have hi : IsStrict isoD.hom := isStrict_of_comp_eq_id isoD.inv_hom_id
  have hj : IsStrict isoD.inv := isStrict_of_comp_eq_id isoD.hom_inv_id
  have hu : IsStrict isoE.hom := isStrict_of_comp_eq_id isoE.inv_hom_id
  have hv : IsStrict isoE.inv := isStrict_of_comp_eq_id isoE.hom_inv_id
```

```
have hji : isoD.inv.comp isoD.hom = idMap (T.obj Dalg.carrier).sys := isoD.
  hom_inv_id
have hvu : isoE.inv.comp isoE.hom = idMap (T.obj E).sys := isoE.hom_inv_id
have huv : isoE.hom.comp isoE.inv = idMap E.sys := isoE.inv_hom_id

obtain ⟨?DE, h?DE⟩ := hT Dalg.carrier E
obtain ⟨?ED, h?ED⟩ := hT E Dalg.carrier
obtain ⟨?EE, h?EE⟩ := hT E E

let Oph := (homOp T Dalg.carrier E isoD.inv isoE.hom hj hu).comp ?DE
let Opg := (homOp T E Dalg.carrier isoE.inv isoD.hom hv hi).comp ?ED
let Opk := (homOp T E E isoE.inv isoE.hom hv hu).comp ?EE

let H : ℕ → ApproximableMap Dalg.carrier.sys E.sys := fun n => (toStrictMap (Oph.
  iterElem n)).1
let G : ℕ → ApproximableMap E.sys Dalg.carrier.sys := fun n => (toStrictMap (Opg.
  iterElem n)).1
let K : ℕ → ApproximableMap E.sys E.sys := fun n => (toStrictMap (Opk.iterElem n)).1

have iterElem_zero : ∀ {? : Type w} {V : NeighborhoodSystem ?} (f : ApproximableMap V
   V),
    f.iterElem 0 = V.bot := by
  intro ? V f
  show (f.iterMap 0).toElementMap V.bot = V.bot
  rw [iterMap_zero, toElementMap_idMap]

have H_succ : ∀ n, H (n + 1)
    = isoE.hom.comp ((T.map (X := Dalg.carrier) (Y := E) (H n)).comp isoD.inv) := by
  intro n
  show (toStrictMap (Oph.iterElem (n + 1))).1 = _
  rw [iterElem_succ]
  exact opStep T Dalg.carrier E isoD.inv isoE.hom hj hu ?DE h?DE (Oph.iterElem n)
have G_succ : ∀ n, G (n + 1)
    = isoD.hom.comp ((T.map (X := E) (Y := Dalg.carrier) (G n)).comp isoE.inv) := by
  intro n
  show (toStrictMap (Opg.iterElem (n + 1))).1 = _
  rw [iterElem_succ]
  exact opStep T E Dalg.carrier isoE.inv isoD.hom hv hi ?ED h?ED (Opg.iterElem n)
have K_succ : ∀ n, K (n + 1)
    = isoE.hom.comp ((T.map (X := E) (Y := E) (K n)).comp isoE.inv) := by
  intro n
  show (toStrictMap (Opk.iterElem (n + 1))).1 = _
  rw [iterElem_succ]
  exact opStep T E E isoE.inv isoE.hom hv hu ?EE h?EE (Opk.iterElem n)

have H_mono : ∀ {n m : ℕ}, n ≤ m → H n ≤ H m := fun hnm =>
  toStrictMap_mono (iterElem_mono Oph hnm)
have G_mono : ∀ {n m : ℕ}, n ≤ m → G n ≤ G m := fun hnm =>
  toStrictMap_mono (iterElem_mono Opg hnm)

have key : ∀ (a : ApproximableMap (T.obj Dalg.carrier).sys (T.obj E).sys)
    (b : ApproximableMap (T.obj E).sys (T.obj Dalg.carrier).sys),
    (isoE.hom.comp (a.comp isoD.inv)).comp (isoD.hom.comp (b.comp isoE.inv))
      = isoE.hom.comp ((a.comp b).comp isoE.inv) := by
  intro a b
```

```
  rw [comp_assoc isoE.hom (a.comp isoD.inv) (isoD.hom.comp (b.comp isoE.inv)),
      comp_assoc a isoD.inv (isoD.hom.comp (b.comp isoE.inv)),
      ← comp_assoc isoD.inv isoD.hom (b.comp isoE.inv), hji, idMap_comp,
      ← comp_assoc a b isoE.inv]

have hTcomp : ∀ (p : ApproximableMap Dalg.carrier.sys E.sys)
    (q : ApproximableMap E.sys Dalg.carrier.sys),
    (T.map (X := Dalg.carrier) (Y := E) p).comp (T.map (X := E) (Y := Dalg.carrier)
  q)
      = T.map (X := E) (Y := E) (p.comp q) :=
  fun p q => (T.map_comp (X := E) (Y := Dalg.carrier) (Z := E) p q).symm

have ladder : ∀ n, (H n).comp (G n) = K n := by
  intro n
  induction n with
  | zero =>
    apply ApproximableMap.ext
    intro X Z
    have hH0 : ∀ {P Q}, (H 0).rel P Q ↔ Dalg.carrier.sys.mem P ∧ Q = E.sys.master :=
   by
      intro P Q
      show (toStrictMap (Oph.iterElem 0)).1.rel P Q ↔ _
      rw [iterElem_zero]; exact botStrict_rel
    have hG0 : ∀ {P Q}, (G 0).rel P Q ↔ E.sys.mem P ∧ Q = Dalg.carrier.sys.master :=
   by
      intro P Q
      show (toStrictMap (Opg.iterElem 0)).1.rel P Q ↔ _
      rw [iterElem_zero]; exact botStrict_rel
    have hK0 : ∀ {P Q}, (K 0).rel P Q ↔ E.sys.mem P ∧ Q = E.sys.master := by
      intro P Q
      show (toStrictMap (Opk.iterElem 0)).1.rel P Q ↔ _
      rw [iterElem_zero]; exact botStrict_rel
    constructor
    · rintro ⟨Y, hG, hHr⟩
      rw [hG0] at hG; rw [hH0] at hHr
      obtain ⟨hEX, rfl⟩ := hG
      obtain ⟨_, rfl⟩ := hHr
      rw [hK0]; exact ⟨hEX, rfl⟩
    · intro hK
      rw [hK0] at hK
      obtain ⟨hEX, rfl⟩ := hK
      exact ⟨Dalg.carrier.sys.master,
        (hG0).mpr ⟨hEX, rfl⟩, (hH0).mpr ⟨Dalg.carrier.sys.master_mem, rfl⟩⟩
  | succ n ih =>
    rw [H_succ n, G_succ n, key, K_succ n, hTcomp (H n) (G n), ih]

let hh := (toStrictMap Oph.fixElement).1
let gg := (toStrictMap Opg.fixElement).1
let kk := (toStrictMap Opk.fixElement).1
have H_fix_rel : ∀ X Y, hh.rel X Y ↔ ∃ n, (H n).rel X Y := by
  intro X Y
  show (toStrictMap Oph.fixElement).1.rel X Y ↔ _
  rw [toStrictMap_rel, Oph.fixElement_eq_iSupDirected, NeighborhoodSystem.
  mem_iSupDirected]
  constructor
  · rintro ⟨n, hn⟩; exact ⟨n, hn⟩
```

```
  · rintro ⟨n, hn⟩; exact ⟨n, hn⟩
have G_fix_rel : ∀ X Y, gg.rel X Y ↔ ∃ n, (G n).rel X Y := by
  intro X Y
  show (toStrictMap Opg.fixElement).1.rel X Y ↔ _
  rw [toStrictMap_rel, Opg.fixElement_eq_iSupDirected, NeighborhoodSystem.
  mem_iSupDirected]
  constructor
  · rintro ⟨n, hn⟩; exact ⟨n, hn⟩
  · rintro ⟨n, hn⟩; exact ⟨n, hn⟩
have K_fix_rel : ∀ X Y, kk.rel X Y ↔ ∃ n, (K n).rel X Y := by
  intro X Y
  show (toStrictMap Opk.fixElement).1.rel X Y ↔ _
  rw [toStrictMap_rel, Opk.fixElement_eq_iSupDirected, NeighborhoodSystem.
  mem_iSupDirected]
  constructor
  · rintro ⟨n, hn⟩; exact ⟨n, hn⟩
  · rintro ⟨n, hn⟩; exact ⟨n, hn⟩

have hgk : hh.comp gg = kk := by
  apply ApproximableMap.ext
  intro X Z
  constructor
  · rintro ⟨Y, hgXY, hhYZ⟩
    rw [G_fix_rel] at hgXY
    rw [H_fix_rel] at hhYZ
    obtain ⟨m, hm⟩ := hgXY
    obtain ⟨n, hn⟩ := hhYZ
    rw [K_fix_rel]
    refine ⟨max m n, ?_⟩
    rw [← ladder (max m n)]
    exact ⟨Y, G_mono (le_max_left m n) X Y hm, H_mono (le_max_right m n) Y Z hn⟩
  · intro hk
    rw [K_fix_rel] at hk
    obtain ⟨p, hp⟩ := hk
    rw [← ladder p] at hp
    obtain ⟨Y, hG, hHr⟩ := hp
    exact ⟨Y, (G_fix_rel X Y).mpr ⟨p, hG⟩, (H_fix_rel Y Z).mpr ⟨p, hHr⟩⟩

have hk_le : kk ≤ idMap E.sys := by
  have hstepeq : (toStrictMap (Opk.toElementMap
      (toStrictFilter (⟨idMap E.sys, isStrict_idMap⟩ : StrictMap E.sys E.sys)))).1
        = idMap E.sys := by
    have hs := opStep T E E isoE.inv isoE.hom hv hu ?EE h?EE
      (toStrictFilter (⟨idMap E.sys, isStrict_idMap⟩ : StrictMap E.sys E.sys))
    have hmapid : T.map (X := E) (Y := E) (idMap E.sys) = idMap (T.obj E).sys := T.
  map_id E
    rw [hs, show (toStrictMap (toStrictFilter
        (⟨idMap E.sys, isStrict_idMap⟩ : StrictMap E.sys E.sys))).1 = idMap E.sys
  from
        congrArg Subtype.val (toStrictMap_toStrictFilter _),
      hmapid, idMap_comp, huv]
  have hfp : Opk.toElementMap (toStrictFilter (⟨idMap E.sys, isStrict_idMap⟩ :
  StrictMap E.sys E.sys))
      = toStrictFilter (⟨idMap E.sys, isStrict_idMap⟩ : StrictMap E.sys E.sys) := by
    calc Opk.toElementMap (toStrictFilter ⟨idMap E.sys, isStrict_idMap⟩)
        = toStrictFilter (toStrictMap (Opk.toElementMap
```

```
            (toStrictFilter ⟨idMap E.sys, isStrict_idMap⟩))) :=
          (toStrictFilter_toStrictMap _).symm
      _ = toStrictFilter (⟨idMap E.sys, isStrict_idMap⟩ : StrictMap E.sys E.sys) :=
    by
          congr 1
          apply Subtype.ext
          rw [hstepeq]
      _ = toStrictFilter ⟨idMap E.sys, isStrict_idMap⟩ := rfl
    have hle : Opk.fixElement ≤ toStrictFilter (⟨idMap E.sys, isStrict_idMap⟩ :
    StrictMap E.sys E.sys) :=
      fixElement_le_of_toElementMap_le Opk (le_of_eq hfp)
    have hmono := toStrictMap_mono hle
    show (toStrictMap Opk.fixElement).1 ≤ idMap E.sys
    refine le_of_le_of_eq hmono ?_
    exact congrArg Subtype.val (toStrictMap_toStrictFilter _)

  let Balg : TAlgebra T := ⟨E, isoE.hom⟩
  have h_fixeq : hh = isoE.hom.comp ((T.map (X := Dalg.carrier) (Y := E) hh).comp isoD
    .inv) := by
    have hs := opStep T Dalg.carrier E isoD.inv isoE.hom hj hu ?DE h?DE Oph.fixElement
    rw [toElementMap_fixElement] at hs
    exact hs
  have h_comm : hh.comp isoD.hom = isoE.hom.comp (T.map (X := Dalg.carrier) (Y := E)
    hh) := by
    conv_lhs => rw [h_fixeq]
    rw [comp_assoc, comp_assoc, hji, comp_idMap]
  let h_alg : AlgHom Dalg Balg := { hom := hh, comm := h_comm }
  have g_fixeq : gg = isoD.hom.comp ((T.map (X := E) (Y := Dalg.carrier) gg).comp isoE
    .inv) := by
    have hs := opStep T E Dalg.carrier isoE.inv isoD.hom hv hi ?ED h?ED Opg.fixElement
    rw [toElementMap_fixElement] at hs
    exact hs
  have g_comm : gg.comp isoE.hom = isoD.hom.comp (T.map (X := E) (Y := Dalg.carrier)
    gg) := by
    conv_lhs => rw [g_fixeq]
    rw [comp_assoc, comp_assoc, hvu, comp_idMap]
  let g_alg : AlgHom Balg Dalg := { hom := gg, comm := g_comm }

  have hgh_id : gg.comp hh = idMap Dalg.carrier.sys := by
    have huniq : g_alg.comp h_alg = AlgHom.id Dalg := by
      rw [hinit.uniq Dalg (g_alg.comp h_alg), hinit.uniq Dalg (AlgHom.id Dalg)]
    exact congrArg AlgHom.hom huniq

  exact trianglelefteq_of_projectionPair hh gg hgh_id (le_of_eq_of_le hgk hk_le)
end

section
set_option linter.unusedVariables false

theorem theorem_616.{w} : ∀
  (T :
    @DomainTheory.NeighbourhoodSystems.Endofunctor.{w + 1, w} DomainTheory.
    NeighbourhoodSystems.DomainObj.{w}
      DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w}),
  DomainTheory.NeighbourhoodSystems.ContinuousOnMaps.{w} T →
    ∀
```

```
      (Dalg :
        @DomainTheory.NeighbourhoodSystems.TAlgebra.{w + 1, w} DomainTheory.
    NeighbourhoodSystems.DomainObj.{w}
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} T)
      (hinit :
        @DomainTheory.NeighbourhoodSystems.IsInitial.{w + 1, w} DomainTheory.
    NeighbourhoodSystems.DomainObj.{w}
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} T Dalg)
      (E : DomainTheory.NeighbourhoodSystems.DomainObj.{w})
      (isoE :
        @DomainTheory.NeighbourhoodSystems.Iso.{w + 1, w} DomainTheory.
    NeighbourhoodSystems.DomainObj.{w}
          DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w}
          (@DomainTheory.NeighbourhoodSystems.Endofunctor.obj.{w + 1, w} DomainTheory.
    NeighbourhoodSystems.DomainObj.{w}
            DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} T E)
          E),
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq.{w, w}
        (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w} DomainTheory.
    NeighbourhoodSystems.DomainObj.{w}
            DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} T Dalg).
    carrier
        E.carrier
        (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier.{w + 1, w} DomainTheory.
    NeighbourhoodSystems.DomainObj.{w}
            DomainTheory.NeighbourhoodSystems.instCategoryDomainObj.{w} T Dalg).sys
        E.sys :=
  DomainTheory.NeighbourhoodSystems.trianglelefteq_of_isInitial.{w}
end

section
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

abbrev tcObj (D : StrictDomainObj.{w}) : StrictDomainObj.{w} where
  carrier := Option (Unit ? D.carrier ? D.carrier)
  sys := sum3 unitSys D.sys D.sys Example62C.unitSys_nonempty D.nonempty D.nonempty
  nonempty := sum3_nonempty

@[simp] theorem tcObj_sys (D : StrictDomainObj.{w}) :
    (tcObj D).sys = sum3 unitSys D.sys D.sys Example62C.unitSys_nonempty D.nonempty D.
    nonempty := rfl

section ShapeLemmas

open Example62C

variable {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  {V₂ : NeighborhoodSystem ?} {h₀ : ∀ X, V₀.mem X → X.Nonempty}
  {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty} {h₂ : ∀ Z, V₂.mem Z → Z.Nonempty}

theorem mem_subset_j0_inv {W : Set (Option (α ? β ? ?))} {X : Set α}
    (hW : (sum3 V₀ V₁ V₂ h₀ h₁ h₂).mem W) (hsub : W ⊆ j0 X) :
    ∃ X₂, V₀.mem X₂ ∧ W = j0 X₂ := by
  rcases hW with rfl | ⟨X₂, hX₂, rfl⟩ | ⟨Y₂, hY₂, rfl⟩ | ⟨Z₂, hZ₂, rfl⟩
  · exact absurd (hsub none_mem_master3) none_not_mem_j0
  · exact ⟨X₂, hX₂, rfl⟩
```

```
  · obtain ⟨b, hb⟩ := h₁ Y₂ hY₂; exact absurd (hsub (t1_mem_j1.mpr hb)) t1_not_mem_j0
  · obtain ⟨c, hc⟩ := h₂ Z₂ hZ₂; exact absurd (hsub (t2_mem_j2.mpr hc)) t2_not_mem_j0

theorem mem_subset_j1_inv {W : Set (Option (α ? β ? ?))} {Y : Set β}
    (hW : (sum3 V₀ V₁ V₂ h₀ h₁ h₂).mem W) (hsub : W ⊆ j1 Y) :
    ∃ Y₂, V₁.mem Y₂ ∧ W = j1 Y₂ := by
  rcases hW with rfl | ⟨X₂, hX₂, rfl⟩ | ⟨Y₂, hY₂, rfl⟩ | ⟨Z₂, hZ₂, rfl⟩
  · exact absurd (hsub none_mem_master3) none_not_mem_j1
  · obtain ⟨a, ha⟩ := h₀ X₂ hX₂; exact absurd (hsub (t0_mem_j0.mpr ha)) t0_not_mem_j1
  · exact ⟨Y₂, hY₂, rfl⟩
  · obtain ⟨c, hc⟩ := h₂ Z₂ hZ₂; exact absurd (hsub (t2_mem_j2.mpr hc)) t2_not_mem_j1

theorem mem_subset_j2_inv {W : Set (Option (α ? β ? ?))} {Z : Set ?}
    (hW : (sum3 V₀ V₁ V₂ h₀ h₁ h₂).mem W) (hsub : W ⊆ j2 Z) :
    ∃ Z₂, V₂.mem Z₂ ∧ W = j2 Z₂ := by
  rcases hW with rfl | ⟨X₂, hX₂, rfl⟩ | ⟨Y₂, hY₂, rfl⟩ | ⟨Z₂, hZ₂, rfl⟩
  · exact absurd (hsub none_mem_master3) none_not_mem_j2
  · obtain ⟨a, ha⟩ := h₀ X₂ hX₂; exact absurd (hsub (t0_mem_j0.mpr ha)) t0_not_mem_j2
  · obtain ⟨b, hb⟩ := h₁ Y₂ hY₂; exact absurd (hsub (t1_mem_j1.mpr hb)) t1_not_mem_j2
  · exact ⟨Z₂, hZ₂, rfl⟩

end ShapeLemmas

section SumInj

open Example62C

variable {α β ? : Type*}
  {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ : NeighborhoodSystem ?}
  {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}
  {h₂ : ∀ Z, V₂.mem Z → Z.Nonempty}

def sinj0 (x₀ : V₀.Element) : (sum3 V₀ V₁ V₂ h₀ h₁ h₂).Element where
  mem W := W = master3 V₀ V₁ V₂ ∨ ∃ X, V₀.mem X ∧ W = j0 X ∧ x₀.mem X
  sub := by
    rintro W (rfl | ⟨X, hX, rfl, -⟩)
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨X, hX, rfl⟩)
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hx⟩) (rfl | ⟨X', hX', rfl, hx'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr ⟨X', hX', by rw [master3_inter_j0 hX'], hx'⟩
    · exact Or.inr ⟨X, hX, by rw [Set.inter_comm, master3_inter_j0 hX], hx⟩
    · exact Or.inr ⟨X ∩ X', x₀.sub (x₀.inter_mem hx hx'), j0_inter_j0 X X', x₀.inter_mem
     hx hx'⟩
  up_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hx⟩) hW' hsub
    · exact Or.inl (eq_master3_of_subset hsub ((sum3 V₀ V₁ V₂ h₀ h₁ h₂).sub_master hW'))
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩ | ⟨Z', hZ', rfl⟩
      · exact Or.inl rfl
      · exact Or.inr ⟨X', hX', rfl, x₀.up_mem hx hX' (j0_subset_j0.mp hsub)⟩
      · obtain ⟨a, ha⟩ := h₀ X (x₀.sub hx); exact absurd (hsub (t0_mem_j0.mpr ha))
    t0_not_mem_j1
      · obtain ⟨a, ha⟩ := h₀ X (x₀.sub hx); exact absurd (hsub (t0_mem_j0.mpr ha))
    t0_not_mem_j2
```

```
@[simp] theorem sinj0_mem_j0 {x₀ : V₀.Element} {X : Set α} (hX : V₀.mem X) :
    (sinj0 (V₁ := V₁) (V₂ := V₂) (h₀ := h₀) (h₁ := h₁) (h₂ := h₂) x₀).mem (j0 X) ↔ x₀.mem
     X := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hx⟩)
    · exact absurd (h0 ▸ none_mem_master3) none_not_mem_j0
    · rw [j0_injective heq]; exact hx
  · intro hx; exact Or.inr ⟨X, hX, rfl, hx⟩

def sinj1 (x₁ : V₁.Element) : (sum3 V₀ V₁ V₂ h₀ h₁ h₂).Element where
  mem W := W = master3 V₀ V₁ V₂ ∨ ∃ Y, V₁.mem Y ∧ W = j1 Y ∧ x₁.mem Y
  sub := by
    rintro W (rfl | ⟨Y, hY, rfl, -⟩)
    · exact Or.inl rfl
    · exact Or.inr (Or.inr (Or.inl ⟨Y, hY, rfl⟩))
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨Y, hY, rfl, hx⟩) (rfl | ⟨Y', hY', rfl, hx'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr ⟨Y', hY', by rw [master3_inter_j1 hY'], hx'⟩
    · exact Or.inr ⟨Y, hY, by rw [Set.inter_comm, master3_inter_j1 hY], hx⟩
    · exact Or.inr ⟨Y ∩ Y', x₁.sub (x₁.inter_mem hx hx'), j1_inter_j1 Y Y', x₁.inter_mem
     hx hx'⟩
  up_mem := by
    rintro W W' (rfl | ⟨Y, hY, rfl, hx⟩) hW' hsub
    · exact Or.inl (eq_master3_of_subset hsub ((sum3 V₀ V₁ V₂ h₀ h₁ h₂).sub_master hW'))
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩ | ⟨Z', hZ', rfl⟩
      · exact Or.inl rfl
      · obtain ⟨b, hb⟩ := h₁ Y (x₁.sub hx); exact absurd (hsub (t1_mem_j1.mpr hb))
    t1_not_mem_j0
      · exact Or.inr ⟨Y', hY', rfl, x₁.up_mem hx hY' (j1_subset_j1.mp hsub)⟩
      · obtain ⟨b, hb⟩ := h₁ Y (x₁.sub hx); exact absurd (hsub (t1_mem_j1.mpr hb))
    t1_not_mem_j2

@[simp] theorem sinj1_mem_j1 {x₁ : V₁.Element} {Y : Set β} (hY : V₁.mem Y) :
    (sinj1 (V₀ := V₀) (V₂ := V₂) (h₀ := h₀) (h₁ := h₁) (h₂ := h₂) x₁).mem (j1 Y) ↔ x₁.mem
     Y := by
  constructor
  · rintro (h0 | ⟨Y', hY', heq, hx⟩)
    · exact absurd (h0 ▸ none_mem_master3) none_not_mem_j1
    · rw [j1_injective heq]; exact hx
  · intro hx; exact Or.inr ⟨Y, hY, rfl, hx⟩

def sinj2 (x₂ : V₂.Element) : (sum3 V₀ V₁ V₂ h₀ h₁ h₂).Element where
  mem W := W = master3 V₀ V₁ V₂ ∨ ∃ Z, V₂.mem Z ∧ W = j2 Z ∧ x₂.mem Z
  sub := by
    rintro W (rfl | ⟨Z, hZ, rfl, -⟩)
    · exact Or.inl rfl
    · exact Or.inr (Or.inr (Or.inr ⟨Z, hZ, rfl⟩))
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨Z, hZ, rfl, hx⟩) (rfl | ⟨Z', hZ', rfl, hx'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr ⟨Z', hZ', by rw [master3_inter_j2 hZ'], hx'⟩
    · exact Or.inr ⟨Z, hZ, by rw [Set.inter_comm, master3_inter_j2 hZ], hx⟩
```

```
    · exact Or.inr ⟨Z ∩ Z', x₂.sub (x₂.inter_mem hx hx'), j2_inter_j2 Z Z', x₂.inter_mem
     hx hx'⟩
  up_mem := by
    rintro W W' (rfl | ⟨Z, hZ, rfl, hx⟩) hW' hsub
    · exact Or.inl (eq_master3_of_subset hsub ((sum3 V₀ V₁ V₂ h₀ h₁ h₂).sub_master hW'))
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩ | ⟨Z', hZ', rfl⟩
      · exact Or.inl rfl
      · obtain ⟨c, hc⟩ := h₂ Z (x₂.sub hx); exact absurd (hsub (t2_mem_j2.mpr hc))
    t2_not_mem_j0
      · obtain ⟨c, hc⟩ := h₂ Z (x₂.sub hx); exact absurd (hsub (t2_mem_j2.mpr hc))
    t2_not_mem_j1
      · exact Or.inr ⟨Z', hZ', rfl, x₂.up_mem hx hZ' (j2_subset_j2.mp hsub)⟩

@[simp] theorem sinj2_mem_j2 {x₂ : V₂.Element} {Z : Set ?} (hZ : V₂.mem Z) :
    (sinj2 (V₀ := V₀) (V₁ := V₁) (h₀ := h₀) (h₁ := h₁) (h₂ := h₂) x₂).mem (j2 Z) ↔ x₂.mem
     Z := by
  constructor
  · rintro (h0 | ⟨Z', hZ', heq, hx⟩)
    · exact absurd (h0 ▸ none_mem_master3) none_not_mem_j2
    · rw [j2_injective heq]; exact hx
  · intro hx; exact Or.inr ⟨Z, hZ, rfl, hx⟩


end SumInj

section SumInjMap

open Example62C

variable {α β ? α' β' ?' : Type*}
  {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ : NeighborhoodSystem ?}
  {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'} {V₂' : NeighborhoodSystem
    ?'}
  {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}
  {h₂ : ∀ Z, V₂.mem Z → Z.Nonempty}
  {h₀' : ∀ X, V₀'.mem X → X.Nonempty} {h₁' : ∀ Y, V₁'.mem Y → Y.Nonempty}
  {h₂' : ∀ Z, V₂'.mem Z → Z.Nonempty}

theorem sinj1_mono {x x' : V₁.Element} (hx : x ≤ x') :
    sinj1 (V₀ := V₀) (V₂ := V₂) (h₀ := h₀) (h₁ := h₁) (h₂ := h₂) x ≤ sinj1 x' := by
  rintro W (rfl | ⟨Y, hY, rfl, hm⟩)
  · exact Or.inl rfl
  · exact Or.inr ⟨Y, hY, rfl, hx Y hm⟩

theorem sinj2_mono {x x' : V₂.Element} (hx : x ≤ x') :
    sinj2 (V₀ := V₀) (V₁ := V₁) (h₀ := h₀) (h₁ := h₁) (h₂ := h₂) x ≤ sinj2 x' := by
  rintro W (rfl | ⟨Z, hZ, rfl, hm⟩)
  · exact Or.inl rfl
  · exact Or.inr ⟨Z, hZ, rfl, hx Z hm⟩

end SumInjMap

section SumMap3

open Example62C
```

```
variable {α β ? α' β' ?' : Type*}
  {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ : NeighborhoodSystem ?}
  {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'} {V₂' : NeighborhoodSystem
    ?'}
  {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}
  {h₂ : ∀ Z, V₂.mem Z → Z.Nonempty}
  {h₀' : ∀ X, V₀'.mem X → X.Nonempty} {h₁' : ∀ Y, V₁'.mem Y → Y.Nonempty}
  {h₂' : ∀ Z, V₂'.mem Z → Z.Nonempty}

def sumMap3 (f₀ : ApproximableMap V₀ V₀') (f₁ : ApproximableMap V₁ V₁')
    (f₂ : ApproximableMap V₂ V₂') :
    ApproximableMap (sum3 V₀ V₁ V₂ h₀ h₁ h₂) (sum3 V₀' V₁' V₂' h₀' h₁' h₂') where
  rel W W' := (sum3 V₀ V₁ V₂ h₀ h₁ h₂).mem W ∧ (sum3 V₀' V₁' V₂' h₀' h₁' h₂').mem W' ∧
    (W' = master3 V₀' V₁' V₂' ∨
      (∃ X Y', W = j0 X ∧ W' = j0 Y' ∧ f₀.rel X Y') ∨
      (∃ X Y', W = j1 X ∧ W' = j1 Y' ∧ f₁.rel X Y') ∨
      (∃ X Y', W = j2 X ∧ W' = j2 Y' ∧ f₂.rel X Y'))
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(sum3 V₀ V₁ V₂ h₀ h₁ h₂).master_mem, (sum3 V₀' V₁' V₂' h₀' h₁' h₂').
    master_mem,
    Or.inl rfl⟩
  inter_right := by
    rintro W W'₁ W'₂ ⟨hW, hW'₁, hd₁⟩ ⟨_, hW'₂, hd₂⟩
    have hmem : ∀ W'' : Set (Option (α' ? β' ? ?')),
        (W'' = master3 V₀' V₁' V₂' ∨
          (∃ X Y', W = j0 X ∧ W'' = j0 Y' ∧ f₀.rel X Y') ∨
          (∃ X Y', W = j1 X ∧ W'' = j1 Y' ∧ f₁.rel X Y') ∨
          (∃ X Y', W = j2 X ∧ W'' = j2 Y' ∧ f₂.rel X Y')) →
          (sum3 V₀' V₁' V₂' h₀' h₁' h₂').mem W'' := by
      rintro W'' (rfl | ⟨_, Y', _, rfl, hf⟩ | ⟨_, Y', _, rfl, hf⟩ | ⟨_, Y', _, rfl, hf⟩)
      · exact (sum3 V₀' V₁' V₂' h₀' h₁' h₂').master_mem
      · exact Or.inr (Or.inl ⟨Y', f₀.rel_cod hf, rfl⟩)
      · exact Or.inr (Or.inr (Or.inl ⟨Y', f₁.rel_cod hf, rfl⟩))
      · exact Or.inr (Or.inr (Or.inr ⟨Y', f₂.rel_cod hf, rfl⟩))
    have key : (W'₁ ∩ W'₂ = master3 V₀' V₁' V₂' ∨
        (∃ X Y', W = j0 X ∧ W'₁ ∩ W'₂ = j0 Y' ∧ f₀.rel X Y') ∨
        (∃ X Y', W = j1 X ∧ W'₁ ∩ W'₂ = j1 Y' ∧ f₁.rel X Y') ∨
        (∃ X Y', W = j2 X ∧ W'₁ ∩ W'₂ = j2 Y' ∧ f₂.rel X Y')) := by
      rcases hd₁ with rfl | ⟨X, Y'₁, hWX₁, rfl, hf₁⟩ | ⟨Y, Y'₁, hWY₁, rfl, hf₁⟩
        | ⟨Z, Y'₁, hWZ₁, rfl, hf₁⟩
      · rw [Set.inter_eq_right.mpr (show W'₂ ⊆ master3 V₀' V₁' V₂' from
          (sum3 V₀' V₁' V₂' h₀' h₁' h₂').sub_master hW'₂)]; exact hd₂
      · rcases hd₂ with rfl | ⟨X', Y'₂, hWX₂, rfl, hf₂⟩ | ⟨Y', Y'₂, hWY₂, rfl, hf₂⟩
          | ⟨Z', Y'₂, hWZ₂, rfl, hf₂⟩
        · rw [Set.inter_eq_left.mpr (j0_subset_master3 (f₀.rel_cod hf₁))]
          exact Or.inr (Or.inl ⟨X, Y'₁, hWX₁, rfl, hf₁⟩)
        · obtain rfl : X = X' := j0_injective (hWX₁.symm.trans hWX₂)
          rw [j0_inter_j0]
          exact Or.inr (Or.inl ⟨X, Y'₁ ∩ Y'₂, hWX₁, rfl, f₀.inter_right hf₁ hf₂⟩)
        · obtain ⟨a, ha⟩ := h₀ X (f₀.rel_dom hf₁)
          exact absurd ((hWX₁.symm.trans hWY₂) ▸ t0_mem_j0.mpr ha) t0_not_mem_j1
        · obtain ⟨a, ha⟩ := h₀ X (f₀.rel_dom hf₁)
          exact absurd ((hWX₁.symm.trans hWZ₂) ▸ t0_mem_j0.mpr ha) t0_not_mem_j2
      · rcases hd₂ with rfl | ⟨X', Y'₂, hWX₂, rfl, hf₂⟩ | ⟨Y', Y'₂, hWY₂, rfl, hf₂⟩
          | ⟨Z', Y'₂, hWZ₂, rfl, hf₂⟩
```

```
      · rw [Set.inter_eq_left.mpr (j1_subset_master3 (f₁.rel_cod hf₁))]
        exact Or.inr (Or.inr (Or.inl ⟨Y, Y'₁, hWY₁, rfl, hf₁⟩))
      · obtain ⟨b, hb⟩ := h₁ Y (f₁.rel_dom hf₁)
        exact absurd ((hWY₁.symm.trans hWX₂) ▸ t1_mem_j1.mpr hb) t1_not_mem_j0
      · obtain rfl : Y = Y' := j1_injective (hWY₁.symm.trans hWY₂)
        rw [j1_inter_j1]
        exact Or.inr (Or.inr (Or.inl ⟨Y, Y'₁ ∩ Y'₂, hWY₁, rfl, f₁.inter_right hf₁ hf₂⟩
  ))
      · obtain ⟨b, hb⟩ := h₁ Y (f₁.rel_dom hf₁)
        exact absurd ((hWY₁.symm.trans hWZ₂) ▸ t1_mem_j1.mpr hb) t1_not_mem_j2
    · rcases hd₂ with rfl | ⟨X', Y'₂, hWX₂, rfl, hf₂⟩ | ⟨Y', Y'₂, hWY₂, rfl, hf₂⟩
        | ⟨Z', Y'₂, hWZ₂, rfl, hf₂⟩
      · rw [Set.inter_eq_left.mpr (j2_subset_master3 (f₂.rel_cod hf₁))]
        exact Or.inr (Or.inr (Or.inr ⟨Z, Y'₁, hWZ₁, rfl, hf₁⟩))
      · obtain ⟨c, hc⟩ := h₂ Z (f₂.rel_dom hf₁)
        exact absurd ((hWZ₁.symm.trans hWX₂) ▸ t2_mem_j2.mpr hc) t2_not_mem_j0
      · obtain ⟨c, hc⟩ := h₂ Z (f₂.rel_dom hf₁)
        exact absurd ((hWZ₁.symm.trans hWY₂) ▸ t2_mem_j2.mpr hc) t2_not_mem_j1
      · obtain rfl : Z = Z' := j2_injective (hWZ₁.symm.trans hWZ₂)
        rw [j2_inter_j2]
        exact Or.inr (Or.inr (Or.inr ⟨Z, Y'₁ ∩ Y'₂, hWZ₁, rfl, f₂.inter_right hf₁ hf₂⟩
  ))
  exact ⟨hW, hmem _ key, key⟩
mono := by
  rintro W W₂ W' W'₂ ⟨hW, hW', hd⟩ hW₂W hW'W'₂ hW₂mem hW'₂mem
  refine ⟨hW₂mem, hW'₂mem, ?_⟩
  rcases hd with rfl | ⟨X, Y', rfl, rfl, hf⟩ | ⟨Y, Y', rfl, rfl, hf⟩ | ⟨Z, Y', rfl,
  rfl, hf⟩
  · exact Or.inl (eq_master3_of_subset hW'W'₂ ((sum3 V₀' V₁' V₂' h₀' h₁' h₂').
  sub_master hW'₂mem))
  · obtain ⟨X₂, hX₂, rfl⟩ := mem_subset_j0_inv hW₂mem hW₂W
    have hX₂X : X₂ ⊆ X := j0_subset_j0.mp hW₂W
    rcases hW'₂mem with rfl | ⟨Y'₂, hY'₂, rfl⟩ | ⟨Y'₂, hY'₂, rfl⟩ | ⟨Y'₂, hY'₂, rfl⟩
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨X₂, Y'₂, rfl, rfl,
        f₀.mono hf hX₂X (j0_subset_j0.mp hW'W'₂) hX₂ hY'₂⟩)
    · obtain ⟨a, ha⟩ := h₀' Y' (f₀.rel_cod hf)
      exact absurd (hW'W'₂ (t0_mem_j0.mpr ha)) t0_not_mem_j1
    · obtain ⟨a, ha⟩ := h₀' Y' (f₀.rel_cod hf)
      exact absurd (hW'W'₂ (t0_mem_j0.mpr ha)) t0_not_mem_j2
  · obtain ⟨Y₂, hY₂, rfl⟩ := mem_subset_j1_inv hW₂mem hW₂W
    have hY₂Y : Y₂ ⊆ Y := j1_subset_j1.mp hW₂W
    rcases hW'₂mem with rfl | ⟨Y'₂, hY'₂, rfl⟩ | ⟨Y'₂, hY'₂, rfl⟩ | ⟨Y'₂, hY'₂, rfl⟩
    · exact Or.inl rfl
    · obtain ⟨b, hb⟩ := h₁' Y' (f₁.rel_cod hf)
      exact absurd (hW'W'₂ (t1_mem_j1.mpr hb)) t1_not_mem_j0
    · exact Or.inr (Or.inr (Or.inl ⟨Y₂, Y'₂, rfl, rfl,
        f₁.mono hf hY₂Y (j1_subset_j1.mp hW'W'₂) hY₂ hY'₂⟩))
    · obtain ⟨b, hb⟩ := h₁' Y' (f₁.rel_cod hf)
      exact absurd (hW'W'₂ (t1_mem_j1.mpr hb)) t1_not_mem_j2
  · obtain ⟨Z₂, hZ₂, rfl⟩ := mem_subset_j2_inv hW₂mem hW₂W
    have hZ₂Z : Z₂ ⊆ Z := j2_subset_j2.mp hW₂W
    rcases hW'₂mem with rfl | ⟨Y'₂, hY'₂, rfl⟩ | ⟨Y'₂, hY'₂, rfl⟩ | ⟨Y'₂, hY'₂, rfl⟩
    · exact Or.inl rfl
    · obtain ⟨c, hc⟩ := h₂' Y' (f₂.rel_cod hf)
      exact absurd (hW'W'₂ (t2_mem_j2.mpr hc)) t2_not_mem_j0
```

```
      · obtain ⟨c, hc⟩ := h₂' Y' (f₂.rel_cod hf)
        exact absurd (hW'W'₂ (t2_mem_j2.mpr hc)) t2_not_mem_j1
      · exact Or.inr (Or.inr (Or.inr ⟨Z₂, Y'₂, rfl, rfl,
          f₂.mono hf hZ₂Z (j2_subset_j2.mp hW'W'₂) hZ₂ hY'₂⟩))

theorem isStrict_sumMap3 (f₀ : ApproximableMap V₀ V₀') (f₁ : ApproximableMap V₁ V₁')
    (f₂ : ApproximableMap V₂ V₂') :
    IsStrict (sumMap3 (h₀ := h₀) (h₁ := h₁) (h₂ := h₂) (h₀' := h₀') (h₁' := h₁') (h₂' :=
    h₂')
      f₀ f₁ f₂) := by
  rintro Y ⟨-, -, hd⟩
  have h0 : (none : Option (α ? β ? ?)) ∈ (sum3 V₀ V₁ V₂ h₀ h₁ h₂).master :=
    none_mem_master3
  rcases hd with rfl | ⟨X, Y', hWX, -, -⟩ | ⟨X, Y', hWX, -, -⟩ | ⟨X, Y', hWX, -, -⟩
  · rfl
  · exact absurd (hWX ▸ h0) none_not_mem_j0
  · exact absurd (hWX ▸ h0) none_not_mem_j1
  · exact absurd (hWX ▸ h0) none_not_mem_j2

theorem sumMap3_comp {α'' β'' ?'' : Type*} {V₀'' : NeighborhoodSystem α''}
    {V₁'' : NeighborhoodSystem β''} {V₂'' : NeighborhoodSystem ?''}
    {h₀'' : ∀ X, V₀''.mem X → X.Nonempty} {h₁'' : ∀ Y, V₁''.mem Y → Y.Nonempty}
    {h₂'' : ∀ Z, V₂''.mem Z → Z.Nonempty}
    (g₀ : ApproximableMap V₀' V₀'') (g₁ : ApproximableMap V₁' V₁'') (g₂ :
    ApproximableMap V₂' V₂'')
    (f₀ : ApproximableMap V₀ V₀') (f₁ : ApproximableMap V₁ V₁') (f₂ : ApproximableMap V₂
     V₂') :
    sumMap3 (h₀ := h₀) (h₁ := h₁) (h₂ := h₂) (h₀' := h₀'') (h₁' := h₁'') (h₂' := h₂'')
        (g₀.comp f₀) (g₁.comp f₁) (g₂.comp f₂)
      = (sumMap3 (h₀ := h₀') (h₁ := h₁') (h₂ := h₂') (h₀' := h₀'') (h₁' := h₁'') (h₂' :=
    h₂'')
          g₀ g₁ g₂).comp
        (sumMap3 (h₀ := h₀) (h₁ := h₁) (h₂ := h₂) (h₀' := h₀') (h₁' := h₁') (h₂' := h₂')
          f₀ f₁ f₂) := by
  apply ApproximableMap.ext
  intro W W''
  constructor
  · rintro ⟨hW, hW'', hd⟩
    rcases hd with rfl | ⟨X, Z'', rfl, rfl, Y', hf, hg⟩ | ⟨Y, Z'', rfl, rfl, Y', hf, hg⟩
      | ⟨Z, Z'', rfl, rfl, Y', hf, hg⟩
    · exact ⟨master3 V₀' V₁' V₂', ⟨hW, (sum3 V₀' V₁' V₂' h₀' h₁' h₂').master_mem, Or.inl
    rfl⟩⟩,
        (sum3 V₀' V₁' V₂' h₀' h₁' h₂').master_mem, hW'', Or.inl rfl⟩
    · exact ⟨j0 Y', ⟨hW, Or.inr (Or.inl ⟨Y', f₀.rel_cod hf, rfl⟩),
        Or.inr (Or.inl ⟨X, Y', rfl, rfl, hf⟩)⟩⟩,
        Or.inr (Or.inl ⟨Y', f₀.rel_cod hf, rfl⟩)⟩, hW'', Or.inr (Or.inl ⟨Y', Z'', rfl,
    rfl, hg⟩)⟩⟩
    · exact ⟨j1 Y', ⟨hW, Or.inr (Or.inr (Or.inl ⟨Y', f₁.rel_cod hf, rfl⟩)),
        Or.inr (Or.inr (Or.inl ⟨Y, Y', rfl, rfl, hf⟩))⟩,
        Or.inr (Or.inr (Or.inl ⟨Y', f₁.rel_cod hf, rfl⟩)), hW'',
        Or.inr (Or.inr (Or.inl ⟨Y', Z'', rfl, rfl, hg⟩))⟩⟩
    · exact ⟨j2 Y', ⟨hW, Or.inr (Or.inr (Or.inr ⟨Y', f₂.rel_cod hf, rfl⟩)),
        Or.inr (Or.inr (Or.inr ⟨Z, Y', rfl, rfl, hf⟩))⟩,
        Or.inr (Or.inr (Or.inr ⟨Y', f₂.rel_cod hf, rfl⟩)), hW'',
        Or.inr (Or.inr (Or.inr ⟨Y', Z'', rfl, rfl, hg⟩))⟩⟩
  · rintro ⟨W', ⟨hW, hW', hdf⟩, _, hW'', hdg⟩
```

```
    refine ⟨hW, hW'', ?_⟩
    rcases hdg with rfl | ⟨X', Z'', hW'X', rfl, hg⟩ | ⟨Y', Z'', hW'Y', rfl, hg⟩
      | ⟨Z', Z'', hW'Z', rfl, hg⟩
    · exact Or.inl rfl
    · rcases hdf with rfl | ⟨X, Y'₀, rfl, hW'eq, hf⟩ | ⟨Y, Y'₀, rfl, hW'eq, hf⟩
        | ⟨Z, Y'₀, rfl, hW'eq, hf⟩
      · exact absurd ((hW'X'.symm) ▸ none_mem_master3) none_not_mem_j0
      · obtain rfl : Y'₀ = X' := j0_injective (hW'eq.symm.trans hW'X')
        exact Or.inr (Or.inl ⟨X, Z'', rfl, rfl, ⟨Y'₀, hf, hg⟩⟩)
      · obtain ⟨b, hb⟩ := h₁' Y'₀ (f₁.rel_cod hf)
        exact absurd ((hW'eq.symm.trans hW'X') ▸ t1_mem_j1.mpr hb) t1_not_mem_j0
      · obtain ⟨c, hc⟩ := h₂' Y'₀ (f₂.rel_cod hf)
        exact absurd ((hW'eq.symm.trans hW'X') ▸ t2_mem_j2.mpr hc) t2_not_mem_j0
    · rcases hdf with rfl | ⟨X, Y'₀, rfl, hW'eq, hf⟩ | ⟨Y, Y'₀, rfl, hW'eq, hf⟩
        | ⟨Z, Y'₀, rfl, hW'eq, hf⟩
      · exact absurd ((hW'Y'.symm) ▸ none_mem_master3) none_not_mem_j1
      · obtain ⟨a, ha⟩ := h₀' Y'₀ (f₀.rel_cod hf)
        exact absurd ((hW'eq.symm.trans hW'Y') ▸ t0_mem_j0.mpr ha) t0_not_mem_j1
      · obtain rfl : Y'₀ = Y' := j1_injective (hW'eq.symm.trans hW'Y')
        exact Or.inr (Or.inr (Or.inl ⟨Y, Z'', rfl, rfl, ⟨Y'₀, hf, hg⟩⟩))
      · obtain ⟨c, hc⟩ := h₂' Y'₀ (f₂.rel_cod hf)
        exact absurd ((hW'eq.symm.trans hW'Y') ▸ t2_mem_j2.mpr hc) t2_not_mem_j1
    · rcases hdf with rfl | ⟨X, Y'₀, rfl, hW'eq, hf⟩ | ⟨Y, Y'₀, rfl, hW'eq, hf⟩
        | ⟨Z, Y'₀, rfl, hW'eq, hf⟩
      · exact absurd ((hW'Z'.symm) ▸ none_mem_master3) none_not_mem_j2
      · obtain ⟨a, ha⟩ := h₀' Y'₀ (f₀.rel_cod hf)
        exact absurd ((hW'eq.symm.trans hW'Z') ▸ t0_mem_j0.mpr ha) t0_not_mem_j2
      · obtain ⟨b, hb⟩ := h₁' Y'₀ (f₁.rel_cod hf)
        exact absurd ((hW'eq.symm.trans hW'Z') ▸ t1_mem_j1.mpr hb) t1_not_mem_j2
      · obtain rfl : Y'₀ = Z' := j2_injective (hW'eq.symm.trans hW'Z')
        exact Or.inr (Or.inr (Or.inr ⟨Z, Z'', rfl, rfl, ⟨Y'₀, hf, hg⟩⟩))

theorem sumMap3_id :
    sumMap3 (h₀ := h₀) (h₁ := h₁) (h₂ := h₂) (h₀' := h₀) (h₁' := h₁) (h₂' := h₂)
      (idMap V₀) (idMap V₁) (idMap V₂) = idMap (sum3 V₀ V₁ V₂ h₀ h₁ h₂) := by
  apply ApproximableMap.ext
  intro W W'
  constructor
  · rintro ⟨hW, hW', hd⟩
    refine ⟨hW, hW', ?_⟩
    rcases hd with rfl | ⟨X, Y', rfl, rfl, _, _, hXY⟩ | ⟨Y, Y', rfl, rfl, _, _, hXY⟩
      | ⟨Z, Y', rfl, rfl, _, _, hXY⟩
    · exact (sum3 V₀ V₁ V₂ h₀ h₁ h₂).sub_master hW
    · exact j0_subset_j0.mpr hXY
    · exact j1_subset_j1.mpr hXY
    · exact j2_subset_j2.mpr hXY
  · rintro ⟨hW, hW', hsub⟩
    refine ⟨hW, hW', ?_⟩
    rcases hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩ | ⟨Z, hZ, rfl⟩
    · left; exact eq_master3_of_subset hsub ((sum3 V₀ V₁ V₂ h₀ h₁ h₂).sub_master hW')
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩ | ⟨Z', hZ', rfl⟩
      · exact Or.inl rfl
      · exact Or.inr (Or.inl ⟨X, X', rfl, rfl, hX, hX', j0_subset_j0.mp hsub⟩)
      · obtain ⟨a, ha⟩ := h₀ X hX; exact absurd (hsub (t0_mem_j0.mpr ha)) t0_not_mem_j1
      · obtain ⟨a, ha⟩ := h₀ X hX; exact absurd (hsub (t0_mem_j0.mpr ha)) t0_not_mem_j2
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩ | ⟨Z', hZ', rfl⟩
```

```
      · exact Or.inl rfl
      · obtain ⟨b, hb⟩ := h₁ Y hY; exact absurd (hsub (t1_mem_j1.mpr hb)) t1_not_mem_j0
      · exact Or.inr (Or.inr (Or.inl ⟨Y, Y', rfl, rfl, hY, hY', j1_subset_j1.mp hsub⟩))
      · obtain ⟨b, hb⟩ := h₁ Y hY; exact absurd (hsub (t1_mem_j1.mpr hb)) t1_not_mem_j2
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩ | ⟨Z', hZ', rfl⟩
      · exact Or.inl rfl
      · obtain ⟨c, hc⟩ := h₂ Z hZ; exact absurd (hsub (t2_mem_j2.mpr hc)) t2_not_mem_j0
      · obtain ⟨c, hc⟩ := h₂ Z hZ; exact absurd (hsub (t2_mem_j2.mpr hc)) t2_not_mem_j1
      · exact Or.inr (Or.inr (Or.inr ⟨Z, Z', rfl, rfl, hZ, hZ', j2_subset_j2.mp hsub⟩))

end SumMap3

section SumInjMap

open Example62C

variable {α β ? α' β' ?' : Type*}
  {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β} {V₂ : NeighborhoodSystem ?}
  {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'} {V₂' : NeighborhoodSystem
    ?'}
  {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}
  {h₂ : ∀ Z, V₂.mem Z → Z.Nonempty}
  {h₀' : ∀ X, V₀'.mem X → X.Nonempty} {h₁' : ∀ Y, V₁'.mem Y → Y.Nonempty}
  {h₂' : ∀ Z, V₂'.mem Z → Z.Nonempty}

theorem sumMap3_sinj0 (f₀ : ApproximableMap V₀ V₀') (f₁ : ApproximableMap V₁ V₁')
    (f₂ : ApproximableMap V₂ V₂') (x₀ : V₀.Element) :
    (sumMap3 (h₀ := h₀) (h₁ := h₁) (h₂ := h₂) (h₀' := h₀') (h₁' := h₁') (h₂' := h₂') f₀ f₁
    f₂).toElementMap
        (sinj0 (V₁ := V₁) (V₂ := V₂) (h₀ := h₀) (h₁ := h₁) (h₂ := h₂) x₀)
      = sinj0 (V₁ := V₁') (V₂ := V₂') (h₀ := h₀') (h₁ := h₁') (h₂ := h₂') (f₀.
    toElementMap x₀) := by
  apply Element.ext
  intro W'
  constructor
  · rintro ⟨U, hU, hUmem, hU'mem, hd⟩
    rcases hd with rfl | ⟨X, Y', hUj, rfl, hf⟩ | ⟨X, Y', hUj, rfl, hf⟩ | ⟨X, Y', hUj,
    rfl, hf⟩
    · exact Or.inl rfl
    · rcases hU with hUm | ⟨X₀, hX₀, hUeq, hx⟩
      · exact absurd ((hUm.symm.trans hUj) ▸ none_mem_master3) none_not_mem_j0
      · have hXX : X = X₀ := j0_injective (hUj.symm.trans hUeq)
        exact Or.inr ⟨Y', f₀.rel_cod hf, rfl, ⟨X₀, hx, hXX ▸ hf⟩⟩
    · rcases hU with hUm | ⟨X₀, hX₀, hUeq, hx⟩
      · exact absurd ((hUm.symm.trans hUj) ▸ none_mem_master3) none_not_mem_j1
      · obtain ⟨a, ha⟩ := h₀ X₀ hX₀; exact absurd ((hUeq.symm.trans hUj) ▸ t0_mem_j0.mpr
     ha) t0_not_mem_j1
    · rcases hU with hUm | ⟨X₀, hX₀, hUeq, hx⟩
      · exact absurd ((hUm.symm.trans hUj) ▸ none_mem_master3) none_not_mem_j2
      · obtain ⟨a, ha⟩ := h₀ X₀ hX₀; exact absurd ((hUeq.symm.trans hUj) ▸ t0_mem_j0.mpr
     ha) t0_not_mem_j2
  · rintro (rfl | ⟨Y', hY', rfl, hm⟩)
    · exact ⟨master3 V₀ V₁ V₂, Or.inl rfl, (sum3 V₀ V₁ V₂ h₀ h₁ h₂).master_mem,
        (sum3 V₀' V₁' V₂' h₀' h₁' h₂').master_mem, Or.inl rfl⟩
    · obtain ⟨X, hx, hf⟩ := hm
      exact ⟨j0 X, Or.inr ⟨X, x₀.sub hx, rfl, hx⟩, Or.inr (Or.inl ⟨X, x₀.sub hx, rfl⟩),
```

```
        Or.inr (Or.inl ⟨Y', f₀.rel_cod hf, rfl⟩), Or.inr (Or.inl ⟨X, Y', rfl, rfl, hf⟩)⟩

theorem sumMap3_sinj1 (f₀ : ApproximableMap V₀ V₀') (f₁ : ApproximableMap V₁ V₁')
    (f₂ : ApproximableMap V₂ V₂') (x₁ : V₁.Element) :
    (sumMap3 (h₀ := h₀) (h₁ := h₁) (h₂ := h₂) (h₀' := h₀') (h₁' := h₁') (h₂' := h₂') f₀ f₁
     f₂).toElementMap
        (sinj1 (V₀ := V₀) (V₂ := V₂) (h₀ := h₀) (h₁ := h₁) (h₂ := h₂) x₁)
      = sinj1 (V₀ := V₀') (V₂ := V₂') (h₀ := h₀') (h₁ := h₁') (h₂ := h₂') (f₁.
    toElementMap x₁) := by
  apply Element.ext
  intro W'
  constructor
  · rintro ⟨U, hU, hUmem, hU'mem, hd⟩
    rcases hd with rfl | ⟨X, Y', hUj, rfl, hf⟩ | ⟨X, Y', hUj, rfl, hf⟩ | ⟨X, Y', hUj,
    rfl, hf⟩
    · exact Or.inl rfl
    · rcases hU with hUm | ⟨Y₀, hY₀, hUeq, hx⟩
      · exact absurd ((hUm.symm.trans hUj) ▶ none_mem_master3) none_not_mem_j0
      · obtain ⟨b, hb⟩ := h₁ Y₀ hY₀; exact absurd ((hUeq.symm.trans hUj) ▶ t1_mem_j1.mpr
     hb) t1_not_mem_j0
    · rcases hU with hUm | ⟨Y₀, hY₀, hUeq, hx⟩
      · exact absurd ((hUm.symm.trans hUj) ▶ none_mem_master3) none_not_mem_j1
      · have hXX : X = Y₀ := j1_injective (hUj.symm.trans hUeq)
        exact Or.inr ⟨Y', f₁.rel_cod hf, rfl, ⟨Y₀, hx, hXX ▶ hf⟩⟩
    · rcases hU with hUm | ⟨Y₀, hY₀, hUeq, hx⟩
      · exact absurd ((hUm.symm.trans hUj) ▶ none_mem_master3) none_not_mem_j2
      · obtain ⟨b, hb⟩ := h₁ Y₀ hY₀; exact absurd ((hUeq.symm.trans hUj) ▶ t1_mem_j1.mpr
     hb) t1_not_mem_j2
  · rintro (rfl | ⟨Y', hY', rfl, hm⟩)
    · exact ⟨master3 V₀ V₁ V₂, Or.inl rfl, (sum3 V₀ V₁ V₂ h₀ h₁ h₂).master_mem,
        (sum3 V₀' V₁' V₂' h₀' h₁' h₂').master_mem, Or.inl rfl⟩
    · obtain ⟨X, hx, hf⟩ := hm
      exact ⟨j1 X, Or.inr ⟨X, x₁.sub hx, rfl, hx⟩, Or.inr (Or.inr (Or.inl ⟨X, x₁.sub hx,
     rfl⟩)),
        Or.inr (Or.inr (Or.inl ⟨Y', f₁.rel_cod hf, rfl⟩)), Or.inr (Or.inr (Or.inl ⟨X, Y
    ', rfl, rfl, hf⟩))⟩

theorem sumMap3_sinj2 (f₀ : ApproximableMap V₀ V₀') (f₁ : ApproximableMap V₁ V₁')
    (f₂ : ApproximableMap V₂ V₂') (x₂ : V₂.Element) :
    (sumMap3 (h₀ := h₀) (h₁ := h₁) (h₂ := h₂) (h₀' := h₀') (h₁' := h₁') (h₂' := h₂') f₀ f₁
     f₂).toElementMap
        (sinj2 (V₀ := V₀) (V₁ := V₁) (h₀ := h₀) (h₁ := h₁) (h₂ := h₂) x₂)
      = sinj2 (V₀ := V₀') (V₁ := V₁') (h₀ := h₀') (h₁ := h₁') (h₂ := h₂') (f₂.
    toElementMap x₂) := by
  apply Element.ext
  intro W'
  constructor
  · rintro ⟨U, hU, hUmem, hU'mem, hd⟩
    rcases hd with rfl | ⟨X, Y', hUj, rfl, hf⟩ | ⟨X, Y', hUj, rfl, hf⟩ | ⟨X, Y', hUj,
    rfl, hf⟩
    · exact Or.inl rfl
    · rcases hU with hUm | ⟨Z₀, hZ₀, hUeq, hx⟩
      · exact absurd ((hUm.symm.trans hUj) ▶ none_mem_master3) none_not_mem_j0
      · obtain ⟨c, hc⟩ := h₂ Z₀ hZ₀; exact absurd ((hUeq.symm.trans hUj) ▶ t2_mem_j2.mpr
     hc) t2_not_mem_j0
    · rcases hU with hUm | ⟨Z₀, hZ₀, hUeq, hx⟩
```

```
      · exact absurd ((hUm.symm.trans hUj) ▶ none_mem_master3) none_not_mem_j1
      · obtain ⟨c, hc⟩ := h₂ Z₀ hZ₀; exact absurd ((hUeq.symm.trans hUj) ▶ t2_mem_j2.mpr
     hc) t2_not_mem_j1
    · rcases hU with hUm | ⟨Z₀, hZ₀, hUeq, hx⟩
      · exact absurd ((hUm.symm.trans hUj) ▶ none_mem_master3) none_not_mem_j2
      · have hXX : X = Z₀ := j2_injective (hUj.symm.trans hUeq)
        exact Or.inr ⟨Y', f₂.rel_cod hf, rfl, ⟨Z₀, hx, hXX ▶ hf⟩⟩
  · rintro (rfl | ⟨Y', hY', rfl, hm⟩)
    · exact ⟨master3 V₀ V₁ V₂, Or.inl rfl, (sum3 V₀ V₁ V₂ h₀ h₁ h₂).master_mem,
        (sum3 V₀' V₁' V₂' h₀' h₁' h₂').master_mem, Or.inl rfl⟩
    · obtain ⟨X, hx, hf⟩ := hm
      exact ⟨j2 X, Or.inr ⟨X, x₂.sub hx, rfl, hx⟩, Or.inr (Or.inr (Or.inr ⟨X, x₂.sub hx,
     rfl⟩)),
        Or.inr (Or.inr (Or.inr ⟨Y', f₂.rel_cod hf, rfl⟩)), Or.inr (Or.inr (Or.inr ⟨X, Y
    ', rfl, rfl, hf⟩))⟩

end SumInjMap

open Example62C in

def tcMapHom {D E : StrictDomainObj.{w}} (f : (D ⟶ E)) :
    ((tcObj D) ⟶ (tcObj E)) :=
  ⟨sumMap3 (h₀ := Example62C.unitSys_nonempty) (h₁ := D.nonempty) (h₂ := D.nonempty)
      (h₀' := Example62C.unitSys_nonempty) (h₁' := E.nonempty) (h₂' := E.nonempty)
      (idMap unitSys) f.1 f.1, isStrict_sumMap3 _ _ _⟩

end
end DomainTheory.NeighbourhoodSystems
end
```

THEOREM 6.16. If on the category of domains and strict approximable maps the functor T is continuous on maps, and if D is an initial T-algebra, then for any system $E \cong T(E)$ we have $D \trianglelefteq E$.

Proof: There is a homomorphism $h : D \to E$. By 6.9 there is a homomorphism $g : E \to D$. Now $g \circ h : D \to D$ is also a homomorphism, so $g \circ h = I_D$ because D is initial. In view of 6.15, all we have to prove now is that $h \circ g \sqsubseteq I_E$.

Let the maps $i : T(D) \to D$ and $j : D \to T(D)$ give the isomorphism for D, and let $u : T(E) \to E$ and $v : E \to T(E)$ do the same for E. By the proof of 6.9 we know

$$g = i \circ T(g) \circ v \quad \text{and} \quad h = u \circ T(h) \circ j$$

and each of these maps is the least fixed point of its respective equation. Let

$$g_0 = \bot_{E \to D} \quad \text{and} \quad h_0 = \bot_{D \to E}$$

and define by recursion

$$g_{n+1} = i \circ T(g_n) \circ v \quad \text{and} \quad h_{n+1} = u \circ T(h_n) \circ j.$$

By the fixed-point calculation

$$g = \bigsqcup_{n=0}^{\infty} g_n \quad \text{and} \quad h = \bigsqcup_{n=0}^{\infty} h_n.$$

Now we see that

$$h_0 \circ g_0 = \bot_{E \to E},$$

and for each n that

$$\begin{aligned} h_{n+1} \circ g_{n+1} &= u \circ T(h_n) \circ j \circ i \circ T(g_n) \circ v \\ &= u \circ T(h_n) \circ T(g_n) \circ v \\ &= u \circ T(h_n \circ g_n) \circ v. \end{aligned}$$

But this means that

$$h \circ g = \bigsqcup_{n=0}^{\infty} (h_n \circ g_n)$$

is the least fixed point for the equation

$$k = u \circ T(k) \circ v.$$

But I_E is one of the fixed points; whence $h \circ g \sqsubseteq I_E$ must follow. □

3.7.18 Lecture VI exercises

EXERCISES

3.7.19 Exercise 6.17 — algebras for sequence domains

Exercise_6_17.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Exercise_4_19
public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Exercise_5_16
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_12
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Theorem_2_7
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Theorem_6_16

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Proposition_6_6
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_16
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_20

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

open Example62C in

abbrev Tc : Endofunctor StrictDomainObj.{w} where
```

```
  obj := tcObj
  map := tcMapHom
  map_id D := Subtype.ext (by
    show sumMap3 (idMap unitSys) (idMap D.sys) (idMap D.sys) = idMap (tcObj D).sys
    exact sumMap3_id)
  map_comp {D E F} g f := Subtype.ext (by
    show sumMap3 (idMap unitSys) (g.1.comp f.1) (g.1.comp f.1)
      = (sumMap3 (idMap unitSys) g.1 g.1).comp (sumMap3 (idMap unitSys) f.1 f.1)
    have h := sumMap3_comp (h₀ := Example62C.unitSys_nonempty) (h₁ := D.nonempty) (h₂
    := D.nonempty)
      (h₀' := Example62C.unitSys_nonempty) (h₁' := E.nonempty) (h₂' := E.nonempty)
      (h₀'' := Example62C.unitSys_nonempty) (h₁'' := F.nonempty) (h₂'' := F.nonempty)
      (idMap unitSys) g.1 g.1 (idMap unitSys) f.1 f.1
    rw [idMap_comp] at h
    exact h)

@[simp] theorem Tc_obj (D : StrictDomainObj.{w}) : Tc.obj D = tcObj D := rfl

@[simp] theorem Tc_map_val {D E : StrictDomainObj.{w}} (f : (D ⟶ E)) :
    (Tc.map f).1 = sumMap3 (h₀ := Example62C.unitSys_nonempty) (h₁ := D.nonempty) (h₂
    := D.nonempty)
      (h₀' := Example62C.unitSys_nonempty) (h₁' := E.nonempty) (h₂' := E.nonempty)
      (idMap unitSys) f.1 f.1 := rfl

open Example44 Example62C ExampleB in

abbrev Cobj : StrictDomainObj.{0} := ⟨Str, C, C_nonempty⟩

end

section
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

namespace Example62C

open Example44 ExampleB Example62

@[simp] theorem ccEquiv_apply (x : C.Element) : ccEquiv x = toCC x := rfl

theorem consMap_mem_embBit {b : Bool} {z : C.Element} {X : Set Str} (hX : C.mem X) :
    ((consMap b).toElementMap z).mem (embBit b X) ↔ z.mem X := by
  constructor
  · rintro ⟨X', hzX', _, _, hsub⟩
    rw [← embBit_eq_prepend] at hsub
    exact z.up_mem hzX' hX (embBit_subset.mp hsub)
  · intro hz
    refine ⟨X, hz, z.sub hz, memC_embBit b hX, ?_⟩
    rw [← embBit_eq_prepend]

theorem consMap_not_mem_embBit_ne {b c : Bool} (hbc : b = c) {z : C.Element} {X : Set
    Str} :
    ¬ ((consMap b).toElementMap z).mem (embBit c X) := by
  rintro ⟨X', hzX', hX'mem, _, hsub⟩
  obtain ⟨a, ha⟩ := C_nonempty X' hX'mem
  rw [← embBit_eq_prepend] at hsub
  obtain ⟨w, hw, heq⟩ := hsub ⟨a, rfl, ha⟩
```

```
  rw [List.cons.injEq] at hw; exact hbc hw.1

theorem consMap_not_mem_nil {b : Bool} {z : C.Element} :
    ¬ ((consMap b).toElementMap z).mem ({[]} : Set Str) := by
  rintro ⟨X', hzX', hX'mem, _, hsub⟩
  obtain ⟨a, ha⟩ := C_nonempty X' hX'mem
  rw [← embBit_eq_prepend] at hsub
  have := hsub ⟨a, rfl, ha⟩
  rw [Set.mem_singleton_iff] at this; exact absurd this (by simp)

end Example62C
end

section
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

def descE : B.carrier.sys.Element :=
  B.str.1.toElementMap (sinj0 (h₀ := Example62C.unitSys_nonempty) (h₁ := B.carrier.
    nonempty)
    (h₂ := B.carrier.nonempty) unitSys.bot)

def descF (b : Bool) (y : B.carrier.sys.Element) : B.carrier.sys.Element :=
  B.str.1.toElementMap (cond b
    (sinj2 (h₀ := Example62C.unitSys_nonempty) (h₁ := B.carrier.nonempty) (h₂ := B.
    carrier.nonempty) y)
    (sinj1 (h₀ := Example62C.unitSys_nonempty) (h₁ := B.carrier.nonempty) (h₂ := B.
    carrier.nonempty) y))

theorem descF_mono (b : Bool) {y y' : B.carrier.sys.Element} (h : y ≤ y') :
    descF B b y ≤ descF B b y' := by
  cases b
  · exact B.str.1.toElementMap_mono (sinj1_mono h)
  · exact B.str.1.toElementMap_mono (sinj2_mono h)

def descVal (z : B.carrier.sys.Element) : Str → B.carrier.sys.Element
  | [] => z
  | b :: σ => descF B b (descVal z σ)

theorem descVal_append (z : B.carrier.sys.Element) (σ ? : Str) :
    descVal B z (σ ++ ?) = descVal B (descVal B z ?) σ := by
  induction σ with
  | nil => rfl
  | cons b σ ih => exact congrArg (descF B b) ih

theorem descVal_mono_z {z z' : B.carrier.sys.Element} (h : z ≤ z') :
    ∀ σ, descVal B z σ ≤ descVal B z' σ
  | [] => h
  | _ :: σ => descF_mono B _ (descVal_mono_z h σ)

theorem descMap_hcone {σ τ : Str} (h : σ <+: τ) :
```

```
    descVal B B.carrier.sys.bot σ ≤ descVal B B.carrier.sys.bot τ := by
  obtain ⟨?, rfl⟩ := h
  rw [descVal_append]
  exact descVal_mono_z B (B.carrier.sys.bot_le _) σ

theorem descMap_hsing {σ τ : Str} (h : σ <+: τ) :
    descVal B B.carrier.sys.bot σ ≤ descVal B (descE B) τ := by
  obtain ⟨?, rfl⟩ := h
  rw [descVal_append]
  exact descVal_mono_z B (B.carrier.sys.bot_le _) σ

end Initial

end

end DomainTheory.NeighbourhoodSystems
end

section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

def descMap : ApproximableMap C B.carrier.sys :=
  liftC B.carrier.sys (descVal B B.carrier.sys.bot) (descVal B (descE B))
    (fun {_ _} => descMap_hcone B) (fun {_ _} => descMap_hsing B)

end Initial

end DomainTheory.NeighbourhoodSystems
end

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

section
section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

@[simp] theorem descMap_strBot (σ : Str) :
    (descMap B).toElementMap (strBot σ) = descVal B B.carrier.sys.bot σ :=
  liftC_strBot _ _ _ _ _ σ

end Initial
end
```

```
section
section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

@[simp] theorem descMap_strElem (σ : Str) :
    (descMap B).toElementMap (strElem σ) = descVal B (descE B) σ :=
  liftC_strElem _ _ _ _ _ σ

end Initial
end

section
section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

theorem C_bot_eq_strBot_nil : C.bot = strBot [] := by
  apply NeighborhoodSystem.Element.ext
  intro Y
  show (C.mem Y ∧ C.master ⊆ Y) ↔ (C.mem Y ∧ cone [] ⊆ Y)
  rw [C_master, cone_nil]

end Initial
end

section
section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

theorem ccEquiv_comp_symm :
    (ofIso ccEquiv).comp (ofIso ccEquiv.symm) = idMap (sum3 unitSys C C Example62C.
    unitSys_nonempty
      Example62C.C_nonempty Example62C.C_nonempty) := by
  apply ext_of_toElementMap
  intro s
  rw [toElementMap_comp, toElementMap_ofIso, toElementMap_ofIso, toElementMap_idMap]
  exact ccEquiv.apply_symm_apply s

end Initial
end

section
section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)
```

```
theorem ccEquiv_symm_comp : (ofIso ccEquiv.symm).comp (ofIso ccEquiv) = idMap C := by
  apply ext_of_toElementMap
  intro x
  rw [toElementMap_comp, toElementMap_ofIso, toElementMap_ofIso, toElementMap_idMap]
  exact ccEquiv.symm_apply_apply x

end Initial
end

section
section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

theorem descMap_strict : IsStrict (descMap B) := by
  rw [isStrict_iff_apply_bot, C_bot_eq_strBot_nil, descMap_strBot]
  rfl

end Initial
end

section
section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

def descStrict : (Cobj ⟶ B.carrier) := ⟨descMap B, descMap_strict B⟩

end Initial
end

section
section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

theorem genKeyBot (g : ApproximableMap C B.carrier.sys) :
    B.str.1.toElementMap ((sumMap3 (h₀ := Example62C.unitSys_nonempty) (h₁ :=
    Example62C.C_nonempty)
        (h₂ := Example62C.C_nonempty) (h₀' := Example62C.unitSys_nonempty) (h₁' := B.
    carrier.nonempty)
        (h₂' := B.carrier.nonempty) (idMap unitSys) g g).toElementMap (toCC (strBot [])
    ))
      = B.carrier.sys.bot := by
  have hb : toCC (strBot []) = (sum3 unitSys C C Example62C.unitSys_nonempty
    Example62C.C_nonempty
      Example62C.C_nonempty).bot := by
    rw [← C_bot_eq_strBot_nil, ← Example62C.ccEquiv_apply]; exact ccEquiv.map_bot
```

```
  rw [hb, isStrict_iff_apply_bot.mp (isStrict_sumMap3 (h₀ := Example62C.
    unitSys_nonempty)
     (h₁ := Example62C.C_nonempty) (h₂ := Example62C.C_nonempty) (idMap unitSys) g g)]
  exact isStrict_iff_apply_bot.mp B.str.2

end Initial
end

section

theorem isStrict_ofIso {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ :
    NeighborhoodSystem β}
    (e : V₀.Element ≃o V₁.Element) : IsStrict (ofIso e) := by
  rw [isStrict_iff_apply_bot, toElementMap_ofIso]
  exact e.map_bot
end

section
open Example44 Example62C in

abbrev cStr : ((Tc.obj Cobj) ⟶ Cobj) :=
  ⟨ofIso (by exact ccEquiv.symm), isStrict_ofIso _⟩
end

section
open Example44 Example62C in

abbrev Calg : TAlgebra Tc := ⟨Cobj, cStr⟩
end

section
namespace Example62C

open Example44 ExampleB Example62

theorem toCC_consMap (b : Bool) (z : C.Element) :
    toCC ((consMap b).toElementMap z)
      = cond b
          (sinj2 (V₀ := unitSys) (V₁ := C) (h₀ := unitSys_nonempty) (h₁ := C_nonempty)
            (h₂ := C_nonempty) z)
          (sinj1 (V₀ := unitSys) (V₂ := C) (h₀ := unitSys_nonempty) (h₁ := C_nonempty)
            (h₂ := C_nonempty) z) := by
  apply NeighborhoodSystem.Element.ext
  intro W
  cases b
  · simp only [Bool.cond_false]
    constructor
    · rintro (rfl | ⟨rfl, hz⟩ | ⟨X, hX, rfl, hz⟩ | ⟨Y, hY, rfl, hz⟩)
      · exact Or.inl rfl
      · exact absurd hz consMap_not_mem_nil
      · exact Or.inr ⟨X, hX, rfl, (consMap_mem_embBit hX).mp hz⟩
      · exact absurd hz (consMap_not_mem_embBit_ne (by decide))
    · rintro (rfl | ⟨Y, hY, rfl, hz⟩)
      · exact Or.inl rfl
      · exact Or.inr (Or.inr (Or.inl ⟨Y, hY, rfl, (consMap_mem_embBit hY).mpr hz⟩))
  · simp only [Bool.cond_true]
```

```
    constructor
    · rintro (rfl | ⟨rfl, hz⟩ | ⟨X, hX, rfl, hz⟩ | ⟨Y, hY, rfl, hz⟩)
      · exact Or.inl rfl
      · exact absurd hz consMap_not_mem_nil
      · exact absurd hz (consMap_not_mem_embBit_ne (by decide))
      · exact Or.inr ⟨Y, hY, rfl, (consMap_mem_embBit hY).mp hz⟩
    · rintro (rfl | ⟨Y, hY, rfl, hz⟩)
      · exact Or.inl rfl
      · exact Or.inr (Or.inr (Or.inr ⟨Y, hY, rfl, (consMap_mem_embBit hY).mpr hz⟩))

end Example62C
end

section
section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

theorem genKey (g : ApproximableMap C B.carrier.sys) (b : Bool) (w : C.Element) :
    B.str.1.toElementMap ((sumMap3 (h₀ := Example62C.unitSys_nonempty) (h₁ :=
    Example62C.C_nonempty)
        (h₂ := Example62C.C_nonempty) (h₀' := Example62C.unitSys_nonempty) (h₁' := B.
    carrier.nonempty)
        (h₂' := B.carrier.nonempty) (idMap unitSys) g g).toElementMap
      (toCC ((consMap b).toElementMap w)))
      = descF B b (g.toElementMap w) := by
  rw [toCC_consMap]
  cases b
  · simp only [Bool.cond_false]; rw [sumMap3_sinj1]; rfl
  · simp only [Bool.cond_true]; rw [sumMap3_sinj2]; rfl

end Initial
end

section
namespace Example62C

open Example44 ExampleB Example62

theorem toCC_strElem_nil :
    toCC (strElem []) = sinj0 (V₁ := C) (V₂ := C) (h₀ := unitSys_nonempty) (h₁ :=
    C_nonempty)
      (h₂ := C_nonempty) unitSys.bot := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨rfl, hz⟩ | ⟨X, hX, rfl, hz⟩ | ⟨Y, hY, rfl, hz⟩)
    · exact Or.inl rfl
    · exact Or.inr ⟨Set.univ, rfl, rfl, unitSys.bot.master_mem⟩
    · exact absurd (hz.2 (Set.mem_singleton_iff.mpr rfl)) nil_not_mem_embBit
    · exact absurd (hz.2 (Set.mem_singleton_iff.mpr rfl)) nil_not_mem_embBit
  · rintro (rfl | ⟨X, hX, rfl, hz⟩)
    · exact Or.inl rfl
    · obtain rfl : X = Set.univ := hX
```

```
      exact Or.inr (Or.inl ⟨rfl, memC_singleton [], subset_rfl⟩)


end Example62C
end

section
section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

theorem genKey0 (g : ApproximableMap C B.carrier.sys) :
    B.str.1.toElementMap ((sumMap3 (h₀ := Example62C.unitSys_nonempty) (h₁ :=
    Example62C.C_nonempty)
        (h₂ := Example62C.C_nonempty) (h₀' := Example62C.unitSys_nonempty) (h₁' := B.
    carrier.nonempty)
        (h₂' := B.carrier.nonempty) (idMap unitSys) g g).toElementMap (toCC (strElem
    [])))
      = descE B := by
  rw [toCC_strElem_nil, sumMap3_sinj0, toElementMap_idMap]
  rfl

end Initial
end

section
section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

theorem descMap_satisfiesRec :
    descMap B = (B.str.1.comp (sumMap3 (h₀ := Example62C.unitSys_nonempty)
        (h₁ := Example62C.C_nonempty) (h₂ := Example62C.C_nonempty) (h₀' := Example62C.
    unitSys_nonempty)
        (h₁' := B.carrier.nonempty) (h₂' := B.carrier.nonempty) (idMap unitSys) (
    descMap B)
        (descMap B))).comp (ofIso ccEquiv) := by
  apply map_ext_C
  · intro σ
    rw [toElementMap_comp, toElementMap_comp, toElementMap_ofIso, descMap_strBot]
    cases σ with
    | nil => exact (genKeyBot B (descMap B)).symm
    | cons b σ =>
      rw [Example62C.ccEquiv_apply, ← consMap_strBot]
      have h := genKey B (descMap B) b (strBot σ)
      rw [descMap_strBot] at h
      exact h.symm
  · intro σ
    rw [toElementMap_comp, toElementMap_comp, toElementMap_ofIso, descMap_strElem]
    cases σ with
    | nil => exact (genKey0 B (descMap B)).symm
    | cons b σ =>
```

```
      rw [Example62C.ccEquiv_apply, ← consMap_strElem]
      have h := genKey B (descMap B) b (strElem σ)
      rw [descMap_strElem] at h
      exact h.symm

end Initial
end

section
section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

theorem descComm : (descMap B).comp (ofIso ccEquiv.symm)
    = B.str.1.comp (sumMap3 (h₀ := Example62C.unitSys_nonempty) (h₁ := Example62C.
    C_nonempty)
        (h₂ := Example62C.C_nonempty) (h₀' := Example62C.unitSys_nonempty) (h₁' := B.
    carrier.nonempty)
        (h₂' := B.carrier.nonempty) (idMap unitSys) (descMap B) (descMap B)) := by
  conv_lhs => rw [descMap_satisfiesRec B]
  rw [comp_assoc, ccEquiv_comp_symm, comp_idMap]

end Initial
end

section
section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

def descAlgHom : AlgHom Calg B where
  hom := descStrict B
  comm := by
    apply Subtype.ext
    simp only [StrictDomainObj.comp_val]
    exact descComm B

end Initial
end

section
section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

theorem rec_determines (g : ApproximableMap C B.carrier.sys)
    (hg : g = (B.str.1.comp (sumMap3 (h₀ := Example62C.unitSys_nonempty) (h₁ :=
    Example62C.C_nonempty)
        (h₂ := Example62C.C_nonempty) (h₀' := Example62C.unitSys_nonempty) (h₁' := B.
    carrier.nonempty)
```

```
        (h₂' := B.carrier.nonempty) (idMap unitSys) g g)).comp (ofIso ccEquiv)) :
    g = descMap B := by
  have hbot : ∀ σ, g.toElementMap (strBot σ) = descVal B B.carrier.sys.bot σ := by
    intro σ
    induction σ with
    | nil =>
      conv_lhs => rw [hg]
      rw [toElementMap_comp, toElementMap_comp, toElementMap_ofIso, Example62C.
    ccEquiv_apply]
      exact genKeyBot B g
    | cons b σ ih =>
      conv_lhs => rw [hg]
      rw [toElementMap_comp, toElementMap_comp, toElementMap_ofIso, Example62C.
    ccEquiv_apply,
        ← consMap_strBot]
      have h := genKey B g b (strBot σ)
      rw [ih] at h
      exact h
  have helem : ∀ σ, g.toElementMap (strElem σ) = descVal B (descE B) σ := by
    intro σ
    induction σ with
    | nil =>
      conv_lhs => rw [hg]
      rw [toElementMap_comp, toElementMap_comp, toElementMap_ofIso, Example62C.
    ccEquiv_apply]
      exact genKey0 B g
    | cons b σ ih =>
      conv_lhs => rw [hg]
      rw [toElementMap_comp, toElementMap_comp, toElementMap_ofIso, Example62C.
    ccEquiv_apply,
        ← consMap_strElem]
      have h := genKey B g b (strElem σ)
      rw [ih] at h
      exact h
  apply map_ext_C
  · intro σ; rw [hbot, descMap_strBot]
  · intro σ; rw [helem, descMap_strElem]

end Initial
end

section
section Initial

open Example44 Example62C ExampleB Exercise419 Exercise516

variable (B : TAlgebra Tc)

theorem descAlgHom_uniq (h' : AlgHom Calg B) : h' = descAlgHom B := by
  obtain ⟨hom, comm⟩ := h'
  have hg : hom.1 = descMap B := by
    refine rec_determines B hom.1 ?_
    have hc : hom.1.comp (ofIso ccEquiv.symm)
        = B.str.1.comp (sumMap3 (h₀ := Example62C.unitSys_nonempty) (h₁ := Example62C.
    C_nonempty)
          (h₂ := Example62C.C_nonempty) (h₀' := Example62C.unitSys_nonempty) (h₁' := B.
```

```
    carrier.nonempty)
          (h₂' := B.carrier.nonempty) (idMap unitSys) hom.1 hom.1) :=
      congrArg Subtype.val comm
    have h2 := congrArg (fun m => m.comp (ofIso ccEquiv)) hc
    simp only at h2
    rw [comp_assoc] at h2
    erw [ccEquiv_symm_comp, comp_idMap] at h2
    exact h2
  have hhom : hom = descStrict B := Subtype.ext hg
  subst hhom
  rfl

end Initial
end

section

def CisInitial : IsInitial Calg where
  desc := descAlgHom
  uniq := fun B h => descAlgHom_uniq B h
end

section
set_option linter.unusedVariables false

theorem example_617 : ∀
  (B :
    @DomainTheory.NeighbourhoodSystems.TAlgebra DomainTheory.NeighbourhoodSystems.
    StrictDomainObj
      DomainTheory.NeighbourhoodSystems.instCategoryStrictDomainObj DomainTheory.
    NeighbourhoodSystems.Tc)
  (h' :
    @DomainTheory.NeighbourhoodSystems.AlgHom DomainTheory.NeighbourhoodSystems.
    StrictDomainObj
      DomainTheory.NeighbourhoodSystems.instCategoryStrictDomainObj DomainTheory.
    NeighbourhoodSystems.Tc
      DomainTheory.NeighbourhoodSystems.Calg B),
  @Eq
    (@DomainTheory.NeighbourhoodSystems.AlgHom DomainTheory.NeighbourhoodSystems.
    StrictDomainObj
      DomainTheory.NeighbourhoodSystems.instCategoryStrictDomainObj DomainTheory.
    NeighbourhoodSystems.Tc
      DomainTheory.NeighbourhoodSystems.Calg B)
    h' (DomainTheory.NeighbourhoodSystems.descAlgHom B) :=
  DomainTheory.NeighbourhoodSystems.descAlgHom_uniq
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise617Gen
open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap DomainTheory
    .NeighbourhoodSystems.Exercise510

section
variable {A : Type} [DecidableEq A]

abbrev Strn (A : Type) := List A
```

```
def coneN (σ : Strn A) : Set (Strn A) := {w | σ <+: w}

omit [DecidableEq A] in

@[simp] theorem mem_coneN {σ w : Strn A} : w ∈ coneN σ ↔ σ <+: w := Iff.rfl

omit [DecidableEq A] in

theorem coneN_nil : coneN ([] : Strn A) = Set.univ := by ext w; simp [coneN]

omit [DecidableEq A] in

theorem coneN_subset_coneN {σ τ : Strn A} : coneN σ ⊆ coneN τ ↔ τ <+: σ := by
  constructor
  · intro h; exact h (show σ ∈ coneN σ from List.prefix_rfl)
  · intro hτσ w hw; exact hτσ.trans hw

omit [DecidableEq A] in

theorem coneN_injective {σ τ : Strn A} (h : coneN σ = coneN τ) : σ = τ := by
  have h1 : τ <+: σ := coneN_subset_coneN.mp (le_of_eq h)
  have h2 : σ <+: τ := coneN_subset_coneN.mp (le_of_eq h.symm)
  exact h2.eq_of_length (h2.length_le.antisymm h1.length_le)

theorem coneN_trichotomy (σ τ : Strn A) :
    coneN σ ⊆ coneN τ ∨ coneN τ ⊆ coneN σ ∨ coneN σ ∩ coneN τ = ∅ :=
  if hστ : σ <+: τ then Or.inr (Or.inl (coneN_subset_coneN.mpr hστ))
  else if hτσ : τ <+: σ then Or.inl (coneN_subset_coneN.mpr hτσ)
  else Or.inr (Or.inr (by
    ext w
    simp only [Set.mem_inter_iff, mem_coneN, Set.mem_empty_iff_false, iff_false,
    not_and]
    intro h1 h2
    rcases List.prefix_or_prefix_of_prefix h1 h2 with h | h
    · exact hστ h
    · exact hτσ h))

def memCn (X : Set (Strn A)) : Prop := (∃ σ, X = coneN σ) ∨ (∃ σ, X = {σ})

omit [DecidableEq A] in

theorem memCn_coneN (σ : Strn A) : memCn (coneN σ) := Or.inl ⟨σ, rfl⟩

omit [DecidableEq A] in

theorem memCn_singleton (σ : Strn A) : memCn ({σ} : Set (Strn A)) := Or.inr ⟨σ, rfl⟩

omit [DecidableEq A] in

theorem singleton_subset_coneN {σ τ : Strn A} : ({τ} : Set (Strn A)) ⊆ coneN σ ↔ σ
    <+: τ := by
  rw [Set.singleton_subset_iff, mem_coneN]

theorem singleton_coneN_nd (σ τ : Strn A) :
    ({τ} : Set (Strn A)) ⊆ coneN σ ∨ coneN σ ⊆ {τ} ∨ ({τ} : Set (Strn A)) ∩ coneN σ =
```

```
    ∅ := by
  by_cases h : σ <+: τ
  · exact Or.inl (singleton_subset_coneN.mpr h)
  · refine Or.inr (Or.inr ?_)
    ext w
    simp only [Set.mem_inter_iff, Set.mem_singleton_iff, mem_coneN, Set.
    mem_empty_iff_false,
      iff_false, not_and]
    rintro rfl hτ
    exact h hτ

theorem nestedOrDisjointN : NestedOrDisjoint (memCn (A := A)) := by
  rintro X Y (⟨σ, rfl⟩ | ⟨σ, rfl⟩) (⟨τ, rfl⟩ | ⟨τ, rfl⟩)
  · exact coneN_trichotomy σ τ
  · rcases singleton_coneN_nd σ τ with h | h | h
    · exact Or.inr (Or.inl h)
    · exact Or.inl h
    · exact Or.inr (Or.inr (by rw [Set.inter_comm]; exact h))
  · rcases singleton_coneN_nd τ σ with h | h | h
    · exact Or.inl h
    · exact Or.inr (Or.inl h)
    · exact Or.inr (Or.inr h)
  · by_cases h : σ = τ
    · subst h; exact Or.inl (Set.Subset.refl _)
    · refine Or.inr (Or.inr ?_)
      ext w
      simp only [Set.mem_inter_iff, Set.mem_singleton_iff, Set.mem_empty_iff_false,
    iff_false,
        not_and]
      rintro rfl h2
      exact h h2

abbrev Cn (A : Type) [DecidableEq A] : NeighborhoodSystem (Strn A) :=
  NeighborhoodSystem.ofNestedOrDisjoint memCn Set.univ
    ⟨[], Set.mem_univ _⟩ (Or.inl ⟨[], coneN_nil.symm⟩) nestedOrDisjointN
    (fun _ => Set.subset_univ _)

@[simp] theorem Cn_mem {X : Set (Strn A)} : (Cn A).mem X ↔ memCn X := Iff.rfl

@[simp] theorem Cn_master : (Cn A).master = (Set.univ : Set (Strn A)) := rfl

theorem Cn_nonempty : ∀ X, (Cn A).mem X → X.Nonempty := by
  rintro X (⟨σ, rfl⟩ | ⟨σ, rfl⟩)
  · exact ⟨σ, List.prefix_rfl⟩
  · exact ⟨σ, rfl⟩

def prependN (σ : Strn A) (X : Set (Strn A)) : Set (Strn A) := {w | ∃ τ, τ ∈ X ∧ w = σ
     ++ τ}

omit [DecidableEq A] in

@[simp] theorem mem_prependN {σ : Strn A} {X : Set (Strn A)} {w : Strn A} :
    w ∈ prependN σ X ↔ ∃ τ, τ ∈ X ∧ w = σ ++ τ := Iff.rfl

omit [DecidableEq A] in
```

```
theorem prependN_coneN (σ ? : Strn A) : prependN σ (coneN ?) = coneN (σ ++ ?) := by
  ext w
  simp only [mem_prependN, mem_coneN]
  constructor
  · rintro ⟨τ, hτ, rfl⟩; exact (List.prefix_append_right_inj σ).mpr hτ
  · rintro ⟨t, ht⟩
    exact ⟨? ++ t, List.prefix_append ? t, by rw [← ht, List.append_assoc]⟩

omit [DecidableEq A] in

theorem prependN_mono (σ : Strn A) {X X' : Set (Strn A)} (h : X' ⊆ X) :
    prependN σ X' ⊆ prependN σ X := by
  rintro w ⟨τ, hτ, rfl⟩; exact ⟨τ, h hτ, rfl⟩

omit [DecidableEq A] in

theorem prependN_singleton (σ τ : Strn A) : prependN σ {τ} = {σ ++ τ} := by
  ext w
  simp only [mem_prependN, Set.mem_singleton_iff]
  constructor
  · rintro ⟨t, rfl, rfl⟩; rfl
  · rintro rfl; exact ⟨τ, rfl, rfl⟩

omit [DecidableEq A] in

theorem memCn_prependN (σ : Strn A) {X : Set (Strn A)} (hX : memCn X) : memCn (
    prependN σ X) := by
  rcases hX with ⟨?, rfl⟩ | ⟨?, rfl⟩
  · exact Or.inl ⟨σ ++ ?, prependN_coneN σ ?⟩
  · exact Or.inr ⟨σ ++ ?, prependN_singleton σ ?⟩

def consMapN (a : A) : ApproximableMap (Cn A) (Cn A) where
  rel X Y := memCn X ∧ memCn Y ∧ prependN [a] X ⊆ Y
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨Or.inl ⟨[], coneN_nil.symm⟩, Or.inl ⟨[], coneN_nil.symm⟩,
    fun _ _ => trivial⟩
  inter_right := by
    rintro X Y Y' ⟨hX, hY, hXY⟩ ⟨_, hY', hXY'⟩
    have hsubInter : prependN [a] X ⊆ Y ∩ Y' := Set.subset_inter hXY hXY'
    have hZ : memCn (prependN [a] X) := memCn_prependN [a] hX
    exact ⟨hX, (Cn A).inter_mem hY hY' hZ hsubInter, hsubInter⟩
  mono := by
    rintro X X' Y Y' ⟨_, _, hXY⟩ hX'X hYY' hX' hY'
    exact ⟨hX', hY', (prependN_mono [a] hX'X).trans (hXY.trans hYY')⟩

@[simp] theorem consMapN_rel {a : A} {X Y : Set (Strn A)} :
    (consMapN a).rel X Y ↔ memCn X ∧ memCn Y ∧ prependN [a] X ⊆ Y := Iff.rfl

section SumSig

universe v

variable {β : Type v} {? : Type v}

abbrev SigTok (A : Type) (β : Type v) := Option (Unit ? (A × β))
```

```
end SumSig

def strBotN (σ : Strn A) : (Cn A).Element := (Cn A).principal (Cn_mem.mpr (memCn_coneN
     σ))

theorem consMapN_strBot (a : A) (σ : Strn A) :
    (consMapN a).toElementMap (strBotN σ) = strBotN (a :: σ) := by
  apply NeighborhoodSystem.Element.ext
  intro Y
  constructor
  · rintro ⟨X, ⟨_, hXcone⟩, _, hY, hsub⟩
    refine ⟨hY, ?_⟩
    calc coneN (a :: σ) = prependN [a] (coneN σ) := by rw [prependN_coneN]; rfl
      _ ⊆ prependN [a] X := prependN_mono [a] hXcone
      _ ⊆ Y := hsub
  · rintro ⟨hY, hsub⟩
    refine ⟨coneN σ, ⟨memCn_coneN σ, subset_rfl⟩, memCn_coneN σ, hY, ?_⟩
    rw [show prependN [a] (coneN σ) = coneN (a :: σ) by rw [prependN_coneN]; rfl]
    exact hsub

def strElemN (σ : Strn A) : (Cn A).Element := (Cn A).principal (Cn_mem.mpr (
    memCn_singleton σ))

theorem consMapN_strElem (a : A) (σ : Strn A) :
    (consMapN a).toElementMap (strElemN σ) = strElemN (a :: σ) := by
  apply NeighborhoodSystem.Element.ext
  intro Y
  constructor
  · rintro ⟨X, ⟨_, hXsing⟩, _, hY, hsub⟩
    refine ⟨hY, ?_⟩
    calc ({a :: σ} : Set (Strn A)) = prependN [a] {σ} := by rw [prependN_singleton];
    rfl
      _ ⊆ prependN [a] X := prependN_mono [a] hXsing
      _ ⊆ Y := hsub
  · rintro ⟨hY, hsub⟩
    refine ⟨{σ}, ⟨memCn_singleton σ, subset_rfl⟩, memCn_singleton σ, hY, ?_⟩
    rw [show prependN [a] ({σ} : Set (Strn A)) = {a :: σ} by rw [prependN_singleton];
    rfl]
    exact hsub

section SumSig

universe v

variable {β : Type v} {? : Type v}

def tc (a : A) (t : β) : SigTok A β := some (Sum.inr (a, t))

def jc (a : A) (X : Set β) : Set (SigTok A β) := {w | ∃ t, w = tc a t ∧ t ∈ X}

omit [DecidableEq A] in

theorem tc_injective {a a' : A} {t t' : β} (h : (tc a t : SigTok A β) = tc a' t') :
    a = a' ∧ t = t' := by
  simp only [tc, Option.some.injEq, Sum.inr.injEq, Prod.mk.injEq] at h; exact h
```

```
omit [DecidableEq A] in

@[simp] theorem tc_mem_jc {a : A} {X : Set β} {t : β} :
    (tc a t : SigTok A β) ∈ jc a X ↔ t ∈ X := by
  constructor
  · rintro ⟨t', heq, ht'⟩; obtain ⟨-, rfl⟩ := tc_injective heq; exact ht'
  · intro ht; exact ⟨t, rfl, ht⟩

def tu : SigTok A β := some (Sum.inl ())

def jU : Set (SigTok A β) := {tu}

omit [DecidableEq A] in

@[simp] theorem mem_jU {w : SigTok A β} : w ∈ (jU : Set (SigTok A β)) ↔ w = tu := Iff.
    rfl

omit [DecidableEq A] in

@[simp] theorem none_not_mem_jU : (none : SigTok A β) ∈ (jU : Set (SigTok A β)) := by
  simp [jU, tu]

omit [DecidableEq A] in

@[simp] theorem none_not_mem_jc {a : A} {X : Set β} : (none : SigTok A β) ∈ jc a X :=
    by
  rintro ⟨t, heq, -⟩; exact absurd heq (by simp [tc])

omit [DecidableEq A] in

@[simp] theorem tu_not_mem_jc {a : A} {X : Set β} : (tu : SigTok A β) ∈ jc a X := by
  rintro ⟨t, heq, -⟩; exact absurd heq (by simp [tu, tc])

omit [DecidableEq A] in

@[simp] theorem tc_not_mem_jU {a : A} {t : β} : (tc a t : SigTok A β) ∈ (jU : Set (
    SigTok A β)) := by
  simp [jU, tu, tc]

omit [DecidableEq A] in

theorem jU_inter_jc (a : A) (X : Set β) : (jU ∩ jc a X : Set (SigTok A β)) = ∅ := by
  ext w
  simp only [Set.mem_inter_iff, mem_jU, Set.mem_empty_iff_false, iff_false, not_and]
  rintro rfl; exact tu_not_mem_jc

omit [DecidableEq A] in

theorem jU_nonempty : (jU : Set (SigTok A β)).Nonempty := ⟨tu, rfl⟩

omit [DecidableEq A] in

theorem jc_inter_jc_ne {a a' : A} (h : a = a') (X X' : Set β) :
    (jc a X ∩ jc a' X' : Set (SigTok A β)) = ∅ := by
  ext w
```

```
  simp only [Set.mem_inter_iff, Set.mem_empty_iff_false, iff_false, not_and]
  rintro ⟨t, rfl, -⟩ ⟨t', heq, -⟩
  exact h (tc_injective heq).1

omit [DecidableEq A] in

theorem jc_inter_jc_same (a : A) (X X' : Set β) :
    (jc a X ∩ jc a X' : Set (SigTok A β)) = jc a (X ∩ X') := by
  ext w
  constructor
  · rintro ⟨⟨t, rfl, ht⟩, ⟨t', heq, ht'⟩⟩
    obtain ⟨-, rfl⟩ := tc_injective heq; exact ⟨t, rfl, ht, ht'⟩
  · rintro ⟨t, rfl, ht, ht'⟩; exact ⟨⟨t, rfl, ht⟩, ⟨t, rfl, ht'⟩⟩

omit [DecidableEq A] in

theorem jc_nonempty {a : A} {X : Set β} (hX : X.Nonempty) : (jc a X : Set (SigTok A β)
    ).Nonempty := by
  obtain ⟨t, ht⟩ := hX; exact ⟨tc a t, t, rfl, ht⟩

omit [DecidableEq A] in

theorem jc_subset_jc {a : A} {X X' : Set β} :
    (jc a X : Set (SigTok A β)) ⊆ jc a X' ↔ X ⊆ X' := by
  constructor
  · intro h t ht; exact tc_mem_jc.mp (h (tc_mem_jc.mpr ht))
  · rintro h w ⟨t, rfl, ht⟩; exact tc_mem_jc.mpr (h ht)

omit [DecidableEq A] in

theorem jc_injective {a : A} {X X' : Set β} (h : (jc a X : Set (SigTok A β)) = jc a X
    ') : X = X' :=
  Set.Subset.antisymm (jc_subset_jc.mp h.subset) (jc_subset_jc.mp h.symm.subset)

omit [DecidableEq A] in

theorem jc_eq_jc {a a' : A} {X X' : Set β} (hXne : X.Nonempty)
    (heq : (jc a X : Set (SigTok A β)) = jc a' X') : a = a' ∧ X = X' := by
  obtain ⟨t, ht⟩ := hXne
  obtain ⟨t', he, -⟩ := heq ▸ (tc_mem_jc.mpr ht)
  obtain ⟨rfl, -⟩ := tc_injective he
  exact ⟨rfl, jc_injective heq⟩

end SumSig

section SumSig

universe v

variable {β : Type v} {? : Type v}

variable (V : NeighborhoodSystem β)

def masterSig : Set (SigTok A β) :=
  {w | w = none ∨ w = tu ∨ ∃ a t, t ∈ V.master ∧ w = tc a t}
```

```
end SumSig

section SumSig

universe v

variable {β : Type v} {? : Type v}

variable (V : NeighborhoodSystem β)

variable {V}

omit [DecidableEq A] in

@[simp] theorem none_mem_masterSig : (none : SigTok A β) ∈ masterSig V := Or.inl rfl

end SumSig

section SumSig

universe v

variable {β : Type v} {? : Type v}

omit [DecidableEq A] in

theorem tc_mem_jc_ne {a a' : A} (h : a = a') {X : Set β} {t : β} :
    (tc a t : SigTok A β) ∈ jc a' X := by
  rintro ⟨t', heq, -⟩; exact h (tc_injective heq).1

end SumSig

section SumSig

universe v

variable {β : Type v} {? : Type v}

variable (V : NeighborhoodSystem β)

variable {V}

omit [DecidableEq A] in

@[simp] theorem tu_mem_masterSig : (tu : SigTok A β) ∈ masterSig V := Or.inr (Or.inl
    rfl)

omit [DecidableEq A] in

theorem eq_masterSig_of_subset {W : Set (SigTok A β)}
    (hsub : masterSig V ⊆ W) (hsub' : W ⊆ masterSig V) : W = masterSig V :=
  Set.Subset.antisymm hsub' hsub

omit [DecidableEq A] in

theorem jU_subset_masterSig : (jU : Set (SigTok A β)) ⊆ masterSig V := by
```

```
  rintro w rfl; exact tu_mem_masterSig

omit [DecidableEq A] in

theorem jc_subset_masterSig {a : A} {X : Set β} (hX : V.mem X) :
    (jc a X : Set (SigTok A β)) ⊆ masterSig V := by
  rintro w ⟨t, rfl, ht⟩; exact Or.inr (Or.inr ⟨a, t, V.sub_master hX ht, rfl⟩)

omit [DecidableEq A] in

theorem masterSig_inter_jU : (masterSig V ∩ jU : Set (SigTok A β)) = jU :=
  Set.inter_eq_right.mpr jU_subset_masterSig

omit [DecidableEq A] in

theorem masterSig_inter_jc {a : A} {X : Set β} (hX : V.mem X) :
    (masterSig V ∩ jc a X : Set (SigTok A β)) = jc a X :=
  Set.inter_eq_right.mpr (jc_subset_masterSig hX)

def sumSig (A : Type) [DecidableEq A] (V : NeighborhoodSystem β)
    (h : ∀ X, V.mem X → X.Nonempty) :
    NeighborhoodSystem (SigTok A β) where
  mem W := W = masterSig V ∨ W = jU ∨ ∃ a X, V.mem X ∧ W = jc a X
  master := masterSig V
  master_nonempty := ⟨none, none_mem_masterSig⟩
  master_mem := Or.inl rfl
  sub_master := by
    rintro W (rfl | rfl | ⟨a, X, hX, rfl⟩)
    · exact subset_rfl
    · exact jU_subset_masterSig
    · exact jc_subset_masterSig hX
  inter_mem := by
    have hne : ∀ W, (W = masterSig V ∨ W = jU ∨ ∃ a X, V.mem X ∧ W = jc a X) →
        (W : Set (SigTok A β)).Nonempty := by
      rintro W (rfl | rfl | ⟨a, X, hX, rfl⟩)
      · exact ⟨none, none_mem_masterSig⟩
      · exact jU_nonempty
      · exact jc_nonempty (h X hX)
    rintro W W' Z hW hW' hZ hZsub
    rcases hW with rfl | rfl | ⟨a, X, hX, rfl⟩
    · rcases hW' with rfl | rfl | ⟨a', X', hX', rfl⟩
      · rw [Set.inter_self]; exact Or.inl rfl
      · rw [masterSig_inter_jU]; exact Or.inr (Or.inl rfl)
      · rw [masterSig_inter_jc hX']; exact Or.inr (Or.inr ⟨a', X', hX', rfl⟩)
    · rcases hW' with rfl | rfl | ⟨a', X', hX', rfl⟩
      · rw [Set.inter_comm, masterSig_inter_jU]; exact Or.inr (Or.inl rfl)
      · rw [Set.inter_self]; exact Or.inr (Or.inl rfl)
      · rw [jU_inter_jc] at hZsub ⊢
        obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
    · rcases hW' with rfl | rfl | ⟨a', X', hX', rfl⟩
      · rw [Set.inter_comm, masterSig_inter_jc hX]; exact Or.inr (Or.inr ⟨a, X, hX, rfl⟩
    )
      · rw [Set.inter_comm, jU_inter_jc] at hZsub ⊢
        obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
      · by_cases haa : a = a'
        · subst haa
```

```
          rw [jc_inter_jc_same] at hZsub ⊢
          rcases hZ with rfl | rfl | ⟨a₂, Z₂, hZ₂, rfl⟩
          · exact absurd (hZsub none_mem_masterSig) (by simp)
          · exact absurd (hZsub (show tu ∈ jU from rfl)) tu_not_mem_jc
          · by_cases ha₂ : a = a₂
            · subst ha₂
              exact Or.inr (Or.inr ⟨a, X ∩ X', V.inter_mem hX hX' hZ₂ (jc_subset_jc.mp
    hZsub), rfl⟩)
            · obtain ⟨t, ht⟩ := h Z₂ hZ₂
              exact absurd (hZsub (tc_mem_jc.mpr ht)) (tc_mem_jc_ne (Ne.symm ha₂))
        · rw [jc_inter_jc_ne haa] at hZsub ⊢
          obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)

@[simp] theorem sumSig_master {h : ∀ X, V.mem X → X.Nonempty} :
    (sumSig A V h).master = masterSig V := rfl

end SumSig

section SumSig

universe v

variable {β : Type v} {? : Type v}

variable (V : NeighborhoodSystem β)

variable {V}

variable {h : ∀ X, V.mem X → X.Nonempty}

theorem mem_subset_jU_inv {W : Set (SigTok A β)}
    (hW : (sumSig A V h).mem W) (hsub : W ⊆ jU) : W = jU := by
  rcases hW with rfl | rfl | ⟨a', X₂, hX₂, rfl⟩
  · exact absurd (hsub none_mem_masterSig) none_not_mem_jU
  · rfl
  · obtain ⟨t, ht⟩ := h X₂ hX₂
    exact absurd (hsub (tc_mem_jc.mpr ht)) tc_not_mem_jU

theorem mem_subset_jc_inv {W : Set (SigTok A β)} {a : A} {X : Set β}
    (hW : (sumSig A V h).mem W) (hsub : W ⊆ jc a X) : ∃ X₂, V.mem X₂ ∧ W = jc a X₂ :=
    by
  rcases hW with rfl | rfl | ⟨a', X₂, hX₂, rfl⟩
  · exact absurd (hsub none_mem_masterSig) none_not_mem_jc
  · exact absurd (hsub (show tu ∈ jU from rfl)) tu_not_mem_jc
  · obtain ⟨t, ht⟩ := h X₂ hX₂
    obtain ⟨t', heq, -⟩ := hsub (tc_mem_jc.mpr ht)
    obtain ⟨rfl, -⟩ := tc_injective heq
    exact ⟨X₂, hX₂, rfl⟩

def sinjC (a : A) (x : V.Element) : (sumSig A V h).Element where
  mem W := W = masterSig V ∨ ∃ X, V.mem X ∧ W = jc a X ∧ x.mem X
  sub := by
    rintro W (rfl | ⟨X, hX, rfl, -⟩)
    · exact Or.inl rfl
    · exact Or.inr (Or.inr ⟨a, X, hX, rfl⟩)
  master_mem := Or.inl rfl
```

```
  inter_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hx⟩) (rfl | ⟨X', hX', rfl, hx'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr ⟨X', hX', by rw [masterSig_inter_jc hX'], hx'⟩
    · exact Or.inr ⟨X, hX, by rw [Set.inter_comm, masterSig_inter_jc hX], hx⟩
    · exact Or.inr ⟨X ∩ X', x.sub (x.inter_mem hx hx'), jc_inter_jc_same a X X', x.
     inter_mem hx hx'⟩
  up_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hx⟩) hW' hsub
    · exact Or.inl (eq_masterSig_of_subset hsub ((sumSig A V h).sub_master hW'))
    · rcases hW' with rfl | rfl | ⟨a', X', hX', rfl⟩
      · exact Or.inl rfl
      · obtain ⟨t, ht⟩ := h X (x.sub hx)
        exact absurd (hsub (tc_mem_jc.mpr ht)) tc_not_mem_jU
      · obtain ⟨t, ht⟩ := h X (x.sub hx)
        obtain ⟨t', heq, -⟩ := hsub (tc_mem_jc.mpr ht)
        obtain ⟨rfl, -⟩ := tc_injective heq
        exact Or.inr ⟨X', hX', rfl, x.up_mem hx hX' (jc_subset_jc.mp hsub)⟩

def sinjU : (sumSig A V h).Element where
  mem W := W = masterSig V ∨ W = jU
  sub := by
    rintro W (rfl | rfl)
    · exact Or.inl rfl
    · exact Or.inr (Or.inl rfl)
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | rfl) (rfl | rfl)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr (by rw [masterSig_inter_jU])
    · exact Or.inr (by rw [Set.inter_comm, masterSig_inter_jU])
    · exact Or.inr (by rw [Set.inter_self])
  up_mem := by
    rintro W W' (rfl | rfl) hW' hsub
    · exact Or.inl (eq_masterSig_of_subset hsub ((sumSig A V h).sub_master hW'))
    · rcases hW' with rfl | rfl | ⟨a', X', hX', rfl⟩
      · exact Or.inl rfl
      · exact Or.inr rfl
      · exact absurd (hsub (show tu ∈ jU from rfl)) tu_not_mem_jc

@[simp] theorem sinjU_mem_jU : (sinjU (h := h)).mem (jU : Set (SigTok A β)) := Or.inr
    rfl

@[simp] theorem sinjC_mem_jc {a : A} {x : V.Element} {X : Set β} (hX : V.mem X) :
    (sinjC (h := h) a x).mem (jc a X) ↔ x.mem X := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hx⟩)
    · exact absurd (h0 ▸ none_mem_masterSig) none_not_mem_jc
    · rw [jc_injective heq]; exact hx
  · intro hx; exact Or.inr ⟨X, hX, rfl, hx⟩

theorem sinjC_mono {a : A} {x x' : V.Element} (hxle : x ≤ x') :
    sinjC (h := h) a x ≤ sinjC a x' := by
  rintro W (rfl | ⟨X, hX, rfl, hm⟩)
  · exact Or.inl rfl
  · exact Or.inr ⟨X, hX, rfl, hxle X hm⟩
```

```
end SumSig

section SumMapSig

universe v

variable {β₀ β₁ β₂ : Type v}
  {V₀ : NeighborhoodSystem β₀} {V₁ : NeighborhoodSystem β₁} {V₂ : NeighborhoodSystem β₂}
  {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}
  {h₂ : ∀ Z, V₂.mem Z → Z.Nonempty}

def sumMapSig (f : ApproximableMap V₀ V₁) :
    ApproximableMap (sumSig A V₀ h₀) (sumSig A V₁ h₁) where
  rel W W' := (sumSig A V₀ h₀).mem W ∧ (sumSig A V₁ h₁).mem W' ∧
    (W' = masterSig V₁ ∨ (W = jU ∧ W' = jU) ∨
      ∃ a X Y', W = jc a X ∧ W' = jc a Y' ∧ f.rel X Y')
  rel_dom hr := hr.1
  rel_cod hr := hr.2.1
  master_rel := ⟨(sumSig A V₀ h₀).master_mem, (sumSig A V₁ h₁).master_mem, Or.inl rfl⟩
  inter_right := by
    rintro W W'₁ W'₂ ⟨hW, hW'₁, hd₁⟩ ⟨-, hW'₂, hd₂⟩
    have hmem : ∀ W'' : Set (SigTok A β₁),
        (W'' = masterSig V₁ ∨ (W = jU ∧ W'' = jU) ∨
          ∃ a X Y', W = jc a X ∧ W'' = jc a Y' ∧ f.rel X Y') → (sumSig A V₁ h₁).mem W
    '' := by
      rintro W'' (rfl | ⟨-, rfl⟩ | ⟨a, X, Y', -, rfl, hf⟩)
      · exact (sumSig A V₁ h₁).master_mem
      · exact Or.inr (Or.inl rfl)
      · exact Or.inr (Or.inr ⟨a, Y', f.rel_cod hf, rfl⟩)
    have key : (W'₁ ∩ W'₂ = masterSig V₁ ∨ (W = jU ∧ W'₁ ∩ W'₂ = jU) ∨
        ∃ a X Y', W = jc a X ∧ W'₁ ∩ W'₂ = jc a Y' ∧ f.rel X Y') := by
      rcases hd₁ with rfl | ⟨hWU, rfl⟩ | ⟨a, X, Y'₁, hWX, rfl, hf₁⟩
      · rw [Set.inter_eq_right.mpr (show W'₂ ⊆ masterSig V₁ from
          (sumSig A V₁ h₁).sub_master hW'₂)]; exact hd₂
      · rcases hd₂ with rfl | ⟨-, rfl⟩ | ⟨a, X, Y', hWX, rfl, hf⟩
        · rw [Set.inter_eq_left.mpr jU_subset_masterSig]; exact Or.inr (Or.inl ⟨hWU,
    rfl⟩)
        · rw [Set.inter_self]; exact Or.inr (Or.inl ⟨hWU, rfl⟩)
        · obtain ⟨t, ht⟩ := h₀ X (f.rel_dom hf)
          exact absurd ((hWX.symm.trans hWU) ▸ tc_mem_jc.mpr ht) tc_not_mem_jU
      · rcases hd₂ with rfl | ⟨hWU2, rfl⟩ | ⟨a', X', Y'₂, hWX', rfl, hf₂⟩
        · rw [Set.inter_eq_left.mpr (jc_subset_masterSig (f.rel_cod hf₁))]
          exact Or.inr (Or.inr ⟨a, X, Y'₁, hWX, rfl, hf₁⟩)
        · obtain ⟨t, ht⟩ := h₀ X (f.rel_dom hf₁)
          exact absurd ((hWX.symm.trans hWU2) ▸ tc_mem_jc.mpr ht) tc_not_mem_jU
        · obtain ⟨rfl, rfl⟩ := jc_eq_jc (h₀ X (f.rel_dom hf₁)) (hWX.symm.trans hWX')
          rw [jc_inter_jc_same]
          exact Or.inr (Or.inr ⟨a, X, Y'₁ ∩ Y'₂, hWX, rfl, f.inter_right hf₁ hf₂⟩)
    exact ⟨hW, hmem _ key, key⟩
  mono := by
    rintro W W₂ W' W'₂ ⟨hW, hW', hd⟩ hW₂W hW'W'₂ hW₂mem hW'₂mem
    refine ⟨hW₂mem, hW'₂mem, ?_⟩
    rcases hd with rfl | ⟨rfl, rfl⟩ | ⟨a, X, Y', rfl, rfl, hf⟩
    · exact Or.inl (eq_masterSig_of_subset hW'W'₂ ((sumSig A V₁ h₁).sub_master hW'₂mem))
    · have hW₂jU : W₂ = jU := mem_subset_jU_inv hW₂mem hW₂W
```

```
      rcases hW'₂mem with rfl | rfl | ⟨a', Y'₂, hY'₂, rfl⟩
      · exact Or.inl rfl
      · exact Or.inr (Or.inl ⟨hW₂jU, rfl⟩)
      · exact absurd (hW'W'₂ (show tu ∈ jU from rfl)) tu_not_mem_jc
    · obtain ⟨X₂, hX₂, rfl⟩ := mem_subset_jc_inv hW₂mem hW₂W
      have hX₂X : X₂ ⊆ X := jc_subset_jc.mp hW₂W
      rcases hW'₂mem with rfl | rfl | ⟨a', Y'₂, hY'₂, rfl⟩
      · exact Or.inl rfl


      · obtain ⟨t, ht⟩ := h₁ Y' (f.rel_cod hf)
        exact absurd (hW'W'₂ (tc_mem_jc.mpr ht)) tc_not_mem_jU
      · obtain ⟨t, ht⟩ := h₁ Y' (f.rel_cod hf)
        obtain ⟨t', he, -⟩ := hW'W'₂ (tc_mem_jc.mpr ht)
        obtain ⟨rfl, -⟩ := tc_injective he
        exact Or.inr (Or.inr ⟨a, X₂, Y'₂, rfl, rfl,
          f.mono hf hX₂X (jc_subset_jc.mp hW'W'₂) hX₂ hY'₂⟩)

theorem isStrict_sumMapSig (f : ApproximableMap V₀ V₁) :
    IsStrict (sumMapSig (A := A) (h₀ := h₀) (h₁ := h₁) f) := by
  rintro W' ⟨-, -, hd⟩
  rcases hd with rfl | ⟨hWU, -⟩ | ⟨a, X, Y', hWX, -, -⟩
  · rfl
  · exact absurd (hWU ▶ (show (none : SigTok A β₀) ∈ (sumSig A V₀ h₀).master from
      none_mem_masterSig)) none_not_mem_jU
  · exact absurd (hWX ▶ (show (none : SigTok A β₀) ∈ (sumSig A V₀ h₀).master from
      none_mem_masterSig)) none_not_mem_jc

@[simp] theorem sumMapSig_rel {f : ApproximableMap V₀ V₁} {W W'} :
    (sumMapSig (A := A) (h₀ := h₀) (h₁ := h₁) f).rel W W' ↔
      (sumSig A V₀ h₀).mem W ∧ (sumSig A V₁ h₁).mem W' ∧
        (W' = masterSig V₁ ∨ (W = jU ∧ W' = jU) ∨
          ∃ a X Y', W = jc a X ∧ W' = jc a Y' ∧ f.rel X Y') := Iff.rfl

theorem sumMapSig_comp (g : ApproximableMap V₁ V₂) (f : ApproximableMap V₀ V₁) :
    sumMapSig (A := A) (h₀ := h₀) (h₁ := h₂) (g.comp f)
      = (sumMapSig (A := A) (h₀ := h₁) (h₁ := h₂) g).comp
          (sumMapSig (A := A) (h₀ := h₀) (h₁ := h₁) f) := by
  apply ApproximableMap.ext
  intro W W''
  constructor
  · rintro ⟨hW, hW'', hd⟩
    rcases hd with rfl | ⟨hWU, rfl⟩ | ⟨a, X, Z'', rfl, rfl, Y', hf, hg⟩
    · exact ⟨masterSig V₁, ⟨hW, (sumSig A V₁ h₁).master_mem, Or.inl rfl⟩,
        (sumSig A V₁ h₁).master_mem, hW'', Or.inl rfl⟩
    · exact ⟨jU, ⟨hW, Or.inr (Or.inl rfl), Or.inr (Or.inl ⟨hWU, rfl⟩)⟩,
        Or.inr (Or.inl rfl), hW'', Or.inr (Or.inl ⟨rfl, rfl⟩)⟩
    · exact ⟨jc a Y', ⟨hW, Or.inr (Or.inr ⟨a, Y', f.rel_cod hf, rfl⟩),
        Or.inr (Or.inr ⟨a, X, Y', rfl, rfl, hf⟩)⟩,
        Or.inr (Or.inr ⟨a, Y', f.rel_cod hf, rfl⟩), hW'',
        Or.inr (Or.inr ⟨a, Y', Z'', rfl, rfl, hg⟩)⟩
  · rintro ⟨W', ⟨hW, hW', hdf⟩, -, hW'', hdg⟩
    refine ⟨hW, hW'', ?_⟩
    rcases hdg with rfl | ⟨hW'U, rfl⟩ | ⟨a, Y', Z'', hW'Y', rfl, hg⟩
    · exact Or.inl rfl
    · rcases hdf with rfl | ⟨hWU, -⟩ | ⟨a, X, Y'₀, -, hW'eq, hf⟩
      · exact absurd ((hW'U.symm) ▶ none_mem_masterSig) none_not_mem_jU
```

```
      · exact Or.inr (Or.inl ⟨hWU, rfl⟩)
      · obtain ⟨t, ht⟩ := h₁ Y'₀ (f.rel_cod hf)
        exact absurd ((hW'eq.symm.trans hW'U) ▸ tc_mem_jc.mpr ht) tc_not_mem_jU
    · rcases hdf with rfl | ⟨-, hW'U⟩ | ⟨a', X, Y'₀, rfl, hW'eq, hf⟩
      · exact absurd ((hW'Y'.symm) ▸ none_mem_masterSig) none_not_mem_jc
      · obtain ⟨t, ht⟩ := h₁ Y' (g.rel_dom hg)
        exact absurd ((hW'U.symm.trans hW'Y') ▸ tc_mem_jc.mpr ht) tc_not_mem_jU
      · obtain ⟨rfl, rfl⟩ := jc_eq_jc (h₁ Y'₀ (f.rel_cod hf)) (hW'eq.symm.trans hW'Y')
        exact Or.inr (Or.inr ⟨a', X, Z'', rfl, rfl, ⟨Y'₀, hf, hg⟩⟩)

theorem sumMapSig_id :
    sumMapSig (A := A) (V₀ := V₀) (V₁ := V₀) (h₀ := h₀) (h₁ := h₀) (idMap V₀)
      = idMap (sumSig A V₀ h₀) := by
  apply ApproximableMap.ext
  intro W W'
  constructor
  · rintro ⟨hW, hW', hd⟩
    refine ⟨hW, hW', ?_⟩
    rcases hd with rfl | ⟨rfl, rfl⟩ | ⟨a, X, Y', rfl, rfl, -, -, hXY⟩
    · exact (sumSig A V₀ h₀).sub_master hW
    · exact subset_rfl
    · exact jc_subset_jc.mpr hXY
  · rintro ⟨hW, hW', hsub⟩
    refine ⟨hW, hW', ?_⟩
    rcases hW with rfl | rfl | ⟨a, X, hX, rfl⟩
    · exact Or.inl (eq_masterSig_of_subset hsub ((sumSig A V₀ h₀).sub_master hW'))
    · rcases hW' with rfl | rfl | ⟨a', X', hX', rfl⟩
      · exact Or.inl rfl
      · exact Or.inr (Or.inl ⟨rfl, rfl⟩)
      · exact absurd (hsub (show tu ∈ jU from rfl)) tu_not_mem_jc
    · rcases hW' with rfl | rfl | ⟨a', X', hX', rfl⟩
      · exact Or.inl rfl
      · obtain ⟨t, ht⟩ := h₀ X hX; exact absurd (hsub (tc_mem_jc.mpr ht)) tc_not_mem_jU
      · obtain ⟨t, ht⟩ := h₀ X hX
        obtain ⟨t', he, -⟩ := hsub (tc_mem_jc.mpr ht)
        obtain ⟨rfl, -⟩ := tc_injective he
        exact Or.inr (Or.inr ⟨a, X, X', rfl, rfl, hX, hX', jc_subset_jc.mp hsub⟩)

theorem sumMapSig_sinjC (f : ApproximableMap V₀ V₁) (a : A) (x : V₀.Element) :
    (sumMapSig (A := A) (h₀ := h₀) (h₁ := h₁) f).toElementMap (sinjC (h := h₀) a x)
      = sinjC (h := h₁) a (f.toElementMap x) := by
  apply NeighborhoodSystem.Element.ext
  intro W'
  constructor
  · rintro ⟨U, hU, -, -, hd⟩
    rcases hd with rfl | ⟨hUjU, rfl⟩ | ⟨a', X, Y', hUj, rfl, hf⟩
    · exact Or.inl rfl
    · rcases hU with hUm | ⟨X₀, hX₀, hUeq, hx⟩
      · exact absurd ((hUm.symm.trans hUjU) ▸ none_mem_masterSig) none_not_mem_jU
      · obtain ⟨t, ht⟩ := h₀ X₀ hX₀
        exact absurd ((hUeq.symm.trans hUjU) ▸ tc_mem_jc.mpr ht) tc_not_mem_jU
    · rcases hU with hUm | ⟨X₀, hX₀, hUeq, hx⟩
      · exact absurd ((hUm.symm.trans hUj) ▸ none_mem_masterSig) none_not_mem_jc
      · obtain ⟨rfl, rfl⟩ := jc_eq_jc (h₀ X₀ hX₀) (hUeq.symm.trans hUj)
        exact Or.inr ⟨Y', f.rel_cod hf, rfl, ⟨X₀, hx, hf⟩⟩
  · rintro (rfl | ⟨Y', hY', rfl, hm⟩)
```

```
    · exact ⟨masterSig V₀, Or.inl rfl, (sumSig A V₀ h₀).master_mem,
        (sumSig A V₁ h₁).master_mem, Or.inl rfl⟩
    · obtain ⟨X, hx, hf⟩ := hm
      exact ⟨jc a X, Or.inr ⟨X, x.sub hx, rfl, hx⟩, Or.inr (Or.inr ⟨a, X, x.sub hx, rfl⟩
    ),
        Or.inr (Or.inr ⟨a, Y', f.rel_cod hf, rfl⟩), Or.inr (Or.inr ⟨a, X, Y', rfl, rfl,
     hf⟩)⟩

theorem sumMapSig_sinjU (f : ApproximableMap V₀ V₁) :
    (sumMapSig (A := A) (h₀ := h₀) (h₁ := h₁) f).toElementMap (sinjU (h := h₀))
      = sinjU (h := h₁) := by
  apply NeighborhoodSystem.Element.ext
  intro W'
  constructor
  · rintro ⟨U, hU, -, -, hd⟩
    rcases hd with rfl | ⟨-, rfl⟩ | ⟨a, X, Y', hUj, rfl, hf⟩
    · exact Or.inl rfl
    · exact Or.inr rfl
    · rcases hU with hUm | rfl
      · exact absurd ((hUm.symm.trans hUj) ▶ none_mem_masterSig) none_not_mem_jc
      · exact absurd (hUj ▶ (show tu ∈ jU from rfl)) tu_not_mem_jc
  · rintro (rfl | rfl)
    · exact ⟨masterSig V₀, Or.inl rfl, (sumSig A V₀ h₀).master_mem,
        (sumSig A V₁ h₁).master_mem, Or.inl rfl⟩
    · exact ⟨jU, Or.inr rfl, Or.inr (Or.inl rfl), Or.inr (Or.inl rfl),
        Or.inr (Or.inl ⟨rfl, rfl⟩)⟩

end SumMapSig

section SumSig

universe v

variable {β : Type v} {? : Type v}

variable (V : NeighborhoodSystem β)

variable {V}

theorem sumSig_nonempty {h : ∀ X, V.mem X → X.Nonempty} :
    ∀ W, (sumSig A V h).mem W → W.Nonempty := by
  rintro W (rfl | rfl | ⟨a, X, hX, rfl⟩)
  · exact ⟨none, none_mem_masterSig⟩
  · exact jU_nonempty
  · exact jc_nonempty (h X hX)

end SumSig

abbrev tsigObj (A : Type) [DecidableEq A] (D : StrictDomainObj.{0}) : StrictDomainObj
    .{0} where
  carrier := SigTok A D.carrier
  sys := sumSig A D.sys D.nonempty
  nonempty := sumSig_nonempty

@[simp] theorem tsigObj_sys (A : Type) [DecidableEq A] (D : StrictDomainObj.{0}) :
    (tsigObj A D).sys = sumSig A D.sys D.nonempty := rfl
```

```
def tsigMapHom (A : Type) [DecidableEq A] {D E : StrictDomainObj.{0}} (f : (D ⟶ E)) :
    ((tsigObj A D) ⟶ (tsigObj A E)) :=
  ⟨sumMapSig (A := A) (h₀ := D.nonempty) (h₁ := E.nonempty) f.1, isStrict_sumMapSig _⟩

@[simp] theorem tsigMapHom_val (A : Type) [DecidableEq A] {D E : StrictDomainObj.{0}}
    (f : (D ⟶ E)) :
    (tsigMapHom A f).1 = sumMapSig (A := A) (h₀ := D.nonempty) (h₁ := E.nonempty) f.1
    := rfl

abbrev Tsig (A : Type) [DecidableEq A] : Endofunctor StrictDomainObj.{0} where
  obj := tsigObj A
  map := tsigMapHom A
  map_id _ := Subtype.ext sumMapSig_id
  map_comp {_ _ _} g f := Subtype.ext (sumMapSig_comp g.1 f.1)

@[simp] theorem Tsig_obj (A : Type) [DecidableEq A] (D : StrictDomainObj.{0}) :
    (Tsig A).obj D = tsigObj A D := rfl

@[simp] theorem Tsig_map_val (A : Type) [DecidableEq A] {D E : StrictDomainObj.{0}}
    (f : (D ⟶ E)) :
    ((Tsig A).map f).1 = sumMapSig (A := A) (h₀ := D.nonempty) (h₁ := E.nonempty) f.1
    := rfl

section Iso

variable {A : Type} [DecidableEq A] [Inhabited A]

def embA (a : A) (X : Set (Strn A)) : Set (Strn A) := {w | ∃ w', w = a :: w' ∧ w' ∈ X}

omit [DecidableEq A] [Inhabited A] in

@[simp] theorem mem_embA {a : A} {X : Set (Strn A)} {w : Strn A} :
    w ∈ embA a X ↔ ∃ w', w = a :: w' ∧ w' ∈ X := Iff.rfl

abbrev CCn (A : Type) [DecidableEq A] : NeighborhoodSystem (SigTok A (Strn A)) :=
  sumSig A (Cn A) Cn_nonempty

omit [DecidableEq A] [Inhabited A] in

theorem embA_eq_prependN (a : A) (X : Set (Strn A)) : embA a X = prependN [a] X := by
  ext w
  simp only [mem_embA, mem_prependN]
  constructor
  · rintro ⟨w', rfl, hX⟩; exact ⟨w', hX, rfl⟩
  · rintro ⟨t, hX, rfl⟩; exact ⟨t, rfl, hX⟩

omit [DecidableEq A] [Inhabited A] in

theorem embA_coneN (a : A) (σ : Strn A) : embA a (coneN σ) = coneN (a :: σ) := by
  rw [embA_eq_prependN, prependN_coneN]; rfl

omit [DecidableEq A] [Inhabited A] in

theorem embA_inter (a : A) (X X' : Set (Strn A)) : embA a X ∩ embA a X' = embA a (X ∩
    X') := by
```

```
  ext w
  simp only [Set.mem_inter_iff, mem_embA]
  constructor
  · rintro ⟨⟨w', rfl, hX⟩, w'', heq, hX'⟩
    rw [List.cons.injEq] at heq; obtain ⟨-, rfl⟩ := heq; exact ⟨w', rfl, hX, hX'⟩
  · rintro ⟨w', rfl, hX, hX'⟩; exact ⟨⟨w', rfl, hX⟩, ⟨w', rfl, hX'⟩⟩

omit [DecidableEq A] [Inhabited A] in

theorem embA_inter_ne {a a' : A} (h : a = a') (X Y : Set (Strn A)) :
    embA a X ∩ embA a' Y = ∅ := by
  ext w
  simp only [Set.mem_inter_iff, mem_embA, Set.mem_empty_iff_false, iff_false, not_and]
  rintro ⟨w', rfl, -⟩ ⟨w'', heq, -⟩
  rw [List.cons.injEq] at heq; exact h heq.1

omit [DecidableEq A] [Inhabited A] in

theorem embA_singleton (a : A) (σ : Strn A) : embA a ({σ} : Set (Strn A)) = {a :: σ}
    := by
  rw [embA_eq_prependN, prependN_singleton]; rfl

omit [DecidableEq A] [Inhabited A] in

theorem embA_subset {a : A} {X X' : Set (Strn A)} : embA a X ⊆ embA a X' ↔ X ⊆ X' :=
    by
  constructor
  · intro h w' hw'
    obtain ⟨w'', heq, hX'⟩ := h ⟨w', rfl, hw'⟩
    rw [List.cons.injEq] at heq; obtain ⟨-, rfl⟩ := heq; exact hX'
  · rintro h w ⟨w', rfl, hX⟩; exact ⟨w', rfl, h hX⟩

omit [DecidableEq A] [Inhabited A] in

theorem embA_injective {a : A} {X X' : Set (Strn A)} (h : embA a X = embA a X') : X =
    X' :=
  Set.Subset.antisymm (embA_subset.mp h.subset) (embA_subset.mp h.symm.subset)

omit [DecidableEq A] [Inhabited A] in

theorem memCn_cases {W : Set (Strn A)} (hW : memCn W) :
    W = Set.univ ∨ W = ({[]} : Set (Strn A)) ∨ ∃ a X, memCn X ∧ W = embA a X := by
  rcases hW with ⟨σ, rfl⟩ | ⟨σ, rfl⟩
  · cases σ with
    | nil => exact Or.inl coneN_nil
    | cons a σ' => exact Or.inr (Or.inr ⟨a, coneN σ', memCn_coneN σ', (embA_coneN a σ')
    .symm⟩)
  · cases σ with
    | nil => exact Or.inr (Or.inl rfl)
    | cons a σ' => exact Or.inr (Or.inr ⟨a, {σ'}, memCn_singleton σ', (embA_singleton a
     σ').symm⟩)

omit [Inhabited A] in

omit [DecidableEq A] in
```

```
theorem memCn_embA (a : A) {X : Set (Strn A)} (hX : memCn X) : memCn (embA a X) := by
  rw [embA_eq_prependN]; exact memCn_prependN [a] hX

omit [DecidableEq A] [Inhabited A] in

theorem memCn_embA_inv {a : A} {W : Set (Strn A)} (h : memCn (embA a W)) : memCn W :=
    by
  rcases h with ⟨σ, hσ⟩ | ⟨σ, hσ⟩
  · have hmem : σ ∈ embA a W := hσ ▶ (show σ ∈ coneN σ from List.prefix_rfl)
    obtain ⟨w', rfl, -⟩ := hmem
    rw [← embA_coneN] at hσ; rw [embA_injective hσ]; exact memCn_coneN w'
  · have hmem : σ ∈ embA a W := hσ ▶ (Set.mem_singleton_iff.mpr rfl : σ ∈ ({σ} : Set (
    Strn A)))
    obtain ⟨w', rfl, -⟩ := hmem
    rw [← embA_singleton] at hσ; rw [embA_injective hσ]; exact memCn_singleton w'

omit [DecidableEq A] [Inhabited A] in

theorem nil_not_mem_embA {a : A} {X : Set (Strn A)} : ([] : Strn A) ∈ embA a X := by
  rintro ⟨w', heq, -⟩; exact absurd heq (by simp)

omit [DecidableEq A] [Inhabited A] in

theorem embA_ne_univ (a : A) (X : Set (Strn A)) : embA a X = Set.univ := by
  intro h; exact nil_not_mem_embA (X := X) (a := a) (by rw [h]; trivial)

omit [DecidableEq A] [Inhabited A] in

theorem singleton_nil_inter_embA (a : A) (X : Set (Strn A)) :
    (({[]} : Set (Strn A)) ∩ embA a X) = ∅ := by
  ext w
  simp only [Set.mem_inter_iff, Set.mem_singleton_iff, mem_embA, Set.
    mem_empty_iff_false,
    iff_false, not_and]
  rintro rfl ⟨w', heq, -⟩; exact absurd heq (by simp)

omit [DecidableEq A] [Inhabited A] in

theorem singleton_nil_ne_embA (a : A) (X : Set (Strn A)) :
    ({[]} : Set (Strn A)) = embA a X := by
  intro h
  exact nil_not_mem_embA (h ▶ (Set.mem_singleton_iff.mpr rfl : ([] : Strn A) ∈ ({[]} :
     Set (Strn A))))

omit [DecidableEq A] in

theorem singleton_nil_ne_univ : ({[]} : Set (Strn A)) = Set.univ := by
  intro h
  have hmem : ([default] : Strn A) ∈ ({[]} : Set (Strn A)) := by rw [h]; trivial
  rw [Set.mem_singleton_iff] at hmem; exact absurd hmem (by simp)

omit [Inhabited A] in

theorem sumSig_mem_jc_inv {a : A} {X : Set (Strn A)} (h : (CCn A).mem (jc a X)) :
    (Cn A).mem X := by
  rcases h with h0 | hU | ⟨a', X', hX', heq⟩
```

```
  · exact absurd (h0 ▶ none_mem_masterSig) none_not_mem_jc
  · have : (tu : SigTok A (Strn A)) ∈ jc a X := by rw [hU]; rfl
    exact absurd this tu_not_mem_jc
  · by_cases haa : a = a'
    · subst haa; rw [jc_injective heq]; exact hX'
    · obtain ⟨t, ht⟩ := Cn_nonempty X' hX'
      exact absurd (heq.symm ▶ (tc_mem_jc.mpr ht)) (tc_mem_jc_ne (Ne.symm haa))

def toCC (x : (Cn A).Element) : (CCn A).Element where
  mem W := W = masterSig (Cn A)
    ∨ (W = jU ∧ x.mem ({[]} : Set (Strn A)))
    ∨ (∃ a X, (Cn A).mem X ∧ W = jc a X ∧ x.mem (embA a X))
  sub := by
    rintro W (rfl | ⟨rfl, -⟩ | ⟨a, X, hX, rfl, -⟩)
    · exact Or.inl rfl
    · exact Or.inr (Or.inl rfl)
    · exact Or.inr (Or.inr ⟨a, X, hX, rfl⟩)
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨rfl, hzU⟩ | ⟨a, X, hX, rfl, hzF⟩)
      (rfl | ⟨rfl, hzU'⟩ | ⟨a', X', hX', rfl, hzF'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr (Or.inl ⟨by rw [masterSig_inter_jU], hzU'⟩)
    · exact Or.inr (Or.inr ⟨a', X', hX', by rw [masterSig_inter_jc hX'], hzF'⟩)
    · exact Or.inr (Or.inl ⟨by rw [Set.inter_comm, masterSig_inter_jU], hzU⟩)
    · exact Or.inr (Or.inl ⟨by rw [Set.inter_self], hzU⟩)
    · exfalso
      have hx := x.inter_mem hzU hzF'; rw [singleton_nil_inter_embA] at hx
      obtain ⟨t, ht⟩ := Cn_nonempty _ (x.sub hx); exact Set.notMem_empty t ht
    · exact Or.inr (Or.inr ⟨a, X, hX, by rw [Set.inter_comm, masterSig_inter_jc hX],
    hzF⟩)
    · exfalso
      have hx := x.inter_mem hzF hzU'; rw [Set.inter_comm, singleton_nil_inter_embA]
    at hx
      obtain ⟨t, ht⟩ := Cn_nonempty _ (x.sub hx); exact Set.notMem_empty t ht
    · by_cases haa : a = a'
      · subst haa
        have hx := x.inter_mem hzF hzF'; rw [embA_inter] at hx
        exact Or.inr (Or.inr ⟨a, X ∩ X', memCn_embA_inv (x.sub hx), jc_inter_jc_same a
    X X', hx⟩)
      · exfalso
        have hx := x.inter_mem hzF hzF'; rw [embA_inter_ne haa] at hx
        obtain ⟨t, ht⟩ := Cn_nonempty _ (x.sub hx); exact Set.notMem_empty t ht
  up_mem := by
    rintro W W' (rfl | ⟨rfl, hzU⟩ | ⟨a, X, hX, rfl, hzF⟩) hW' hsub
    · exact Or.inl (eq_masterSig_of_subset hsub ((CCn A).sub_master hW'))
    · rcases hW' with rfl | rfl | ⟨a', X', hX', rfl⟩
      · exact Or.inl rfl
      · exact Or.inr (Or.inl ⟨rfl, hzU⟩)
      · exact absurd (hsub (show tu ∈ jU from rfl)) tu_not_mem_jc
    · rcases hW' with rfl | rfl | ⟨a', X', hX', rfl⟩
      · exact Or.inl rfl
      · obtain ⟨t, ht⟩ := Cn_nonempty X hX
        exact absurd (hsub (tc_mem_jc.mpr ht)) tc_not_mem_jU
      · obtain ⟨t, ht⟩ := Cn_nonempty X hX
        obtain ⟨t', he, -⟩ := hsub (tc_mem_jc.mpr ht)
```

```
        obtain ⟨rfl, -⟩ := tc_injective he
        exact Or.inr (Or.inr ⟨a, X', hX', rfl,
          x.up_mem hzF (memCn_embA a hX') (embA_subset.mpr (jc_subset_jc.mp hsub))⟩)

omit [Inhabited A] in

@[simp] theorem toCC_mem_jU {x : (Cn A).Element} :
    (toCC x).mem (jU : Set (SigTok A (Strn A))) ↔ x.mem ({[]} : Set (Strn A)) := by
  constructor
  · rintro (h0 | ⟨-, hz⟩ | ⟨a', X', hX', heq, hz⟩)
    · exact absurd (h0.symm ▶ none_mem_masterSig) none_not_mem_jU
    · exact hz
    · exact absurd (heq ▶ (show tu ∈ jU from rfl)) tu_not_mem_jc
  · intro hz; exact Or.inr (Or.inl ⟨rfl, hz⟩)

omit [Inhabited A] in

@[simp] theorem toCC_mem_jc {x : (Cn A).Element} {a : A} {X : Set (Strn A)} (hX : (Cn
    A).mem X) :
    (toCC x).mem (jc a X) ↔ x.mem (embA a X) := by
  constructor
  · rintro (h0 | ⟨heq, hz⟩ | ⟨a', X', hX', heqj, hz⟩)
    · exact absurd (h0 ▶ none_mem_masterSig) none_not_mem_jc
    · obtain ⟨t, ht⟩ := Cn_nonempty X hX
      exact absurd (heq ▶ (tc_mem_jc.mpr ht)) tc_not_mem_jU
    · obtain ⟨rfl, rfl⟩ := jc_eq_jc (Cn_nonempty X hX) heqj
      exact hz
  · intro hz; exact Or.inr (Or.inr ⟨a, X, hX, rfl, hz⟩)

omit [DecidableEq A] [Inhabited A] in

theorem embA_eq_embA {a a' : A} {X X' : Set (Strn A)} (hXne : X.Nonempty)
    (h : embA a X = embA a' X') : a = a' ∧ X = X' := by
  obtain ⟨w', hw'⟩ := hXne
  have hmem : (a :: w') ∈ embA a X := ⟨w', rfl, hw'⟩
  rw [h] at hmem


  obtain ⟨u, he, -⟩ := hmem
  rw [List.cons.injEq] at he; obtain ⟨rfl, -⟩ := he
  exact ⟨rfl, embA_injective h⟩

def fromCC (s : (CCn A).Element) : (Cn A).Element where
  mem W := W = Set.univ
    ∨ (W = ({[]} : Set (Strn A)) ∧ s.mem jU)
    ∨ (∃ a X, (Cn A).mem X ∧ W = embA a X ∧ s.mem (jc a X))
  sub := by
    rintro W (rfl | ⟨rfl, -⟩ | ⟨a, X, hX, rfl, -⟩)
    · exact Or.inl ⟨[], coneN_nil.symm⟩
    · exact memCn_singleton []
    · exact memCn_embA a hX
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨rfl, hsU⟩ | ⟨a, X, hX, rfl, hsF⟩)
      (rfl | ⟨rfl, hsU'⟩ | ⟨a', X', hX', rfl, hsF'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr (Or.inl ⟨by rw [Set.univ_inter], hsU'⟩)
```

```
    · exact Or.inr (Or.inr ⟨a', X', hX', by rw [Set.univ_inter], hsF'⟩)
    · exact Or.inr (Or.inl ⟨by rw [Set.inter_univ], hsU⟩)
    · exact Or.inr (Or.inl ⟨by rw [Set.inter_self], hsU⟩)
    · exfalso
      have hs := s.inter_mem hsU hsF'; rw [jU_inter_jc] at hs
      obtain ⟨t, ht⟩ := sumSig_nonempty _ (s.sub hs); exact Set.notMem_empty t ht
    · exact Or.inr (Or.inr ⟨a, X, hX, by rw [Set.inter_univ], hsF⟩)
    · exfalso
      have hs := s.inter_mem hsF hsU'; rw [Set.inter_comm, jU_inter_jc] at hs
      obtain ⟨t, ht⟩ := sumSig_nonempty _ (s.sub hs); exact Set.notMem_empty t ht
    · by_cases haa : a = a'
      · subst haa
        have hs := s.inter_mem hsF hsF'; rw [jc_inter_jc_same] at hs
        exact Or.inr (Or.inr ⟨a, X ∩ X', sumSig_mem_jc_inv (s.sub hs), embA_inter a X X
    ', hs⟩)
      · exfalso
        have hs := s.inter_mem hsF hsF'; rw [jc_inter_jc_ne haa] at hs
        obtain ⟨t, ht⟩ := sumSig_nonempty _ (s.sub hs); exact Set.notMem_empty t ht
  up_mem := by
    rintro W W' (rfl | ⟨rfl, hsU⟩ | ⟨a, X, hX, rfl, hsF⟩) hW' hsub
    · exact Or.inl (Set.univ_subset_iff.mp hsub)
    · rcases memCn_cases hW' with rfl | rfl | ⟨a', X', hX', rfl⟩
      · exact Or.inl rfl
      · exact Or.inr (Or.inl ⟨rfl, hsU⟩)
      · exact absurd (hsub (Set.mem_singleton_iff.mpr rfl)) nil_not_mem_embA
    · rcases memCn_cases hW' with rfl | rfl | ⟨a', X', hX', rfl⟩
      · exact Or.inl rfl
      · obtain ⟨t, ht⟩ := Cn_nonempty X hX
        have hm := hsub (⟨t, rfl, ht⟩ : (a :: t) ∈ embA a X)
        rw [Set.mem_singleton_iff] at hm; exact absurd hm (by simp)
      · obtain ⟨t, ht⟩ := Cn_nonempty X hX
        obtain ⟨w', he, -⟩ := hsub (⟨t, rfl, ht⟩ : (a :: t) ∈ embA a X)
        rw [List.cons.injEq] at he; obtain ⟨rfl, -⟩ := he
        refine Or.inr (Or.inr ⟨a, X', hX', rfl, ?_⟩)
        exact s.up_mem hsF (Or.inr (Or.inr ⟨a, X', hX', rfl⟩))
          (jc_subset_jc.mpr (embA_subset.mp hsub))

@[simp] theorem fromCC_mem_nil {s : (CCn A).Element} :
    (fromCC s).mem ({[]} : Set (Strn A)) ↔ s.mem (jU : Set (SigTok A (Strn A))) := by
  constructor
  · rintro (h0 | ⟨-, hs⟩ | ⟨a', X', hX', heq, hs⟩)
    · exact absurd h0 singleton_nil_ne_univ
    · exact hs
    · exact absurd heq (singleton_nil_ne_embA a' X')
  · intro hs; exact Or.inr (Or.inl ⟨rfl, hs⟩)

omit [Inhabited A] in

@[simp] theorem fromCC_mem_embA {s : (CCn A).Element} {a : A} {X : Set (Strn A)} (hX :
     (Cn A).mem X) :
    (fromCC s).mem (embA a X) ↔ s.mem (jc a X) := by
  constructor
  · rintro (h0 | ⟨heq, hs⟩ | ⟨a', X', hX', heqj, hs⟩)
    · exact absurd h0 (embA_ne_univ a X)
    · exact absurd heq.symm (singleton_nil_ne_embA a X)
    · obtain ⟨rfl, rfl⟩ := embA_eq_embA (Cn_nonempty X hX) heqj
```

```
      exact hs
  · intro hs; exact Or.inr (Or.inr ⟨a, X, hX, rfl, hs⟩)

omit [Inhabited A] in

theorem fromCC_toCC (x : (Cn A).Element) : fromCC (toCC x) = x := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨rfl, hs⟩ | ⟨a, X, hX, rfl, hs⟩)
    · exact x.master_mem
    · exact toCC_mem_jU.mp hs
    · exact (toCC_mem_jc hX).mp hs
  · intro hW
    rcases memCn_cases (x.sub hW) with rfl | rfl | ⟨a, X, hX, rfl⟩
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨rfl, toCC_mem_jU.mpr hW⟩)
    · exact Or.inr (Or.inr ⟨a, X, hX, rfl, (toCC_mem_jc hX).mpr hW⟩)

theorem toCC_fromCC (s : (CCn A).Element) : toCC (fromCC s) = s := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨rfl, hs⟩ | ⟨a, X, hX, rfl, hs⟩)
    · exact s.master_mem
    · exact fromCC_mem_nil.mp hs
    · exact (fromCC_mem_embA hX).mp hs
  · intro hW
    rcases s.sub hW with rfl | rfl | ⟨a, X, hX, rfl⟩
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨rfl, fromCC_mem_nil.mpr hW⟩)
    · exact Or.inr (Or.inr ⟨a, X, hX, rfl, (fromCC_mem_embA hX).mpr hW⟩)

def ccEquiv : (Cn A).Element ≃o (CCn A).Element where
  toFun := toCC
  invFun := fromCC
  left_inv := fromCC_toCC
  right_inv := toCC_fromCC
  map_rel_iff' := by
    intro x x'
    constructor
    · intro hle W hW
      rcases memCn_cases (x.sub hW) with rfl | rfl | ⟨a, X, hX, rfl⟩
      · exact x'.master_mem
      · exact toCC_mem_jU.mp (hle _ (Or.inr (Or.inl ⟨rfl, hW⟩)))
      · exact (toCC_mem_jc hX).mp (hle _ (Or.inr (Or.inr ⟨a, X, hX, rfl, hW⟩)))
    · intro hle W hW
      rcases hW with rfl | ⟨rfl, hz⟩ | ⟨a, X, hX, rfl, hz⟩
      · exact Or.inl rfl
      · exact Or.inr (Or.inl ⟨rfl, hle _ hz⟩)
      · exact Or.inr (Or.inr ⟨a, X, hX, rfl, hle _ hz⟩)

@[simp] theorem ccEquiv_apply (x : (Cn A).Element) : ccEquiv x = toCC x := rfl

end Iso
```

```
section Algebra

variable {A : Type} [DecidableEq A] [Inhabited A]

abbrev Cnobj (A : Type) [DecidableEq A] : StrictDomainObj.{0} := ⟨Strn A, Cn A,
    Cn_nonempty⟩

@[simp] theorem Cnobj_sys (A : Type) [DecidableEq A] : (Cnobj A).sys = Cn A := rfl

abbrev cnStr : (((Tsig A).obj (Cnobj A)) ⟶ (Cnobj A)) :=
  ⟨ofIso ccEquiv.symm, isStrict_ofIso _⟩

abbrev Cnalg (A : Type) [DecidableEq A] [Inhabited A] : TAlgebra (Tsig A) := ⟨Cnobj A,
    cnStr⟩

end Algebra

section Iso

variable {A : Type} [DecidableEq A] [Inhabited A]

omit [Inhabited A] in

theorem consMapN_mem_embA {a : A} {z : (Cn A).Element} {X : Set (Strn A)} (hX : (Cn A)
    .mem X) :
    ((consMapN a).toElementMap z).mem (embA a X) ↔ z.mem X := by
  constructor
  · rintro ⟨X', hzX', -, -, hsub⟩
    rw [← embA_eq_prependN] at hsub
    exact z.up_mem hzX' hX (embA_subset.mp hsub)
  · intro hz
    refine ⟨X, hz, z.sub hz, memCn_embA a hX, ?_⟩
    rw [← embA_eq_prependN]

omit [Inhabited A] in

theorem consMapN_not_mem_embA_ne {a c : A} (hac : a = c) {z : (Cn A).Element} {X : Set
     (Strn A)} :
    ¬ ((consMapN a).toElementMap z).mem (embA c X) := by
  rintro ⟨X', hzX', hX'mem, -, hsub⟩
  obtain ⟨t, ht⟩ := Cn_nonempty X' hX'mem
  rw [← embA_eq_prependN] at hsub
  obtain ⟨w, hw, -⟩ := hsub ⟨t, rfl, ht⟩
  rw [List.cons.injEq] at hw; exact hac hw.1

omit [Inhabited A] in

theorem consMapN_not_mem_nil {a : A} {z : (Cn A).Element} :
    ¬ ((consMapN a).toElementMap z).mem ({[]} : Set (Strn A)) := by
  rintro ⟨X', hzX', hX'mem, -, hsub⟩
  obtain ⟨t, ht⟩ := Cn_nonempty X' hX'mem
  rw [← embA_eq_prependN] at hsub
  have hmem := hsub ⟨t, rfl, ht⟩
  rw [Set.mem_singleton_iff] at hmem; exact absurd hmem (by simp)

end Iso
```

```
section Initial

variable {A : Type} [DecidableEq A] [Inhabited A] (B : TAlgebra (Tsig A))

def descE : B.carrier.sys.Element :=
  B.str.1.toElementMap (sinjU (h := B.carrier.nonempty))

def descF (a : A) (y : B.carrier.sys.Element) : B.carrier.sys.Element :=
  B.str.1.toElementMap (sinjC (h := B.carrier.nonempty) a y)

omit [Inhabited A] in

theorem descF_mono (a : A) {y y' : B.carrier.sys.Element} (h : y ≤ y') :
    descF B a y ≤ descF B a y' :=
  B.str.1.toElementMap_mono (sinjC_mono h)

def descVal (z : B.carrier.sys.Element) : Strn A → B.carrier.sys.Element
  | [] => z
  | a :: σ => descF B a (descVal z σ)

omit [Inhabited A] in

theorem descVal_append (z : B.carrier.sys.Element) (σ ? : Strn A) :
    descVal B z (σ ++ ?) = descVal B (descVal B z ?) σ := by
  induction σ with
  | nil => rfl
  | cons a σ ih => exact congrArg (descF B a) ih

omit [Inhabited A] in

theorem descVal_mono_z {z z' : B.carrier.sys.Element} (h : z ≤ z') :
    ∀ σ, descVal B z σ ≤ descVal B z' σ
  | [] => h
  | _ :: σ => descF_mono B _ (descVal_mono_z h σ)

omit [Inhabited A] in

theorem descMap_hcone {σ τ : Strn A} (h : σ <+: τ) :
    descVal B B.carrier.sys.bot σ ≤ descVal B B.carrier.sys.bot τ := by
  obtain ⟨?, rfl⟩ := h
  rw [descVal_append]
  exact descVal_mono_z B (B.carrier.sys.bot_le _) σ

omit [Inhabited A] in

theorem descMap_hsing {σ τ : Strn A} (h : σ <+: τ) :
    descVal B B.carrier.sys.bot σ ≤ descVal B (descE B) τ := by
  obtain ⟨?, rfl⟩ := h
  rw [descVal_append]
  exact descVal_mono_z B (B.carrier.sys.bot_le _) σ

end Initial

section Lift
```

```
variable {A : Type} [DecidableEq A] [Inhabited A] {β : Type}

omit [Inhabited A] in

theorem map_ext_Cn {V : NeighborhoodSystem β} {f g : ApproximableMap (Cn A) V}
    (hbot : ∀ σ, f.toElementMap (strBotN σ) = g.toElementMap (strBotN σ))
    (helem : ∀ σ, f.toElementMap (strElemN σ) = g.toElementMap (strElemN σ)) : f = g
    := by
  apply eq_of_toElementMap_principal
  intro X hX
  obtain (⟨σ, rfl⟩ | ⟨σ, rfl⟩) := (Cn_mem.mp hX)
  · exact hbot σ
  · exact helem σ

omit [DecidableEq A] in

theorem not_coneN_subset_singleton (τ σ : Strn A) : ¬ coneN τ ⊆ ({σ} : Set (Strn A))
    := by
  intro h
  have h1 : τ ∈ ({σ} : Set (Strn A)) := h (show τ ∈ coneN τ from List.prefix_rfl)
  have h2 : (τ ++ [default]) ∈ ({σ} : Set (Strn A)) := h (List.prefix_append τ [
    default])
  rw [Set.mem_singleton_iff] at h1 h2
  have : τ = τ ++ [default] := h1.trans h2.symm
  simp at this

omit [DecidableEq A] in

theorem coneN_ne_singleton (τ σ : Strn A) : coneN τ = ({σ} : Set (Strn A)) := fun h =>
  not_coneN_subset_singleton τ σ (h ▸ subset_rfl)

def liftCn (V : NeighborhoodSystem β) (coneVal singVal : Strn A → V.Element)
    (hcone : ∀ {σ τ : Strn A}, σ <+: τ → coneVal σ ≤ coneVal τ)
    (hsing : ∀ {σ τ : Strn A}, σ <+: τ → coneVal σ ≤ singVal τ) :
    ApproximableMap (Cn A) V where
  rel X Y := (∃ σ, X = coneN σ ∧ (coneVal σ).mem Y) ∨ (∃ σ, X = {σ} ∧ (singVal σ).mem
    Y)
  rel_dom := by
    rintro X Y (⟨σ, rfl, _⟩ | ⟨σ, rfl, _⟩)
    · exact memCn_coneN σ
    · exact memCn_singleton σ
  rel_cod := by
    rintro X Y (⟨σ, _, hY⟩ | ⟨σ, _, hY⟩)
    · exact (coneVal σ).sub hY
    · exact (singVal σ).sub hY
  master_rel := by
    refine Or.inl ⟨[], ?_, (coneVal []).master_mem⟩
    rw [Cn_master]; exact coneN_nil.symm
  inter_right := by
    rintro X Y Y' (⟨σ, rfl, hY⟩ | ⟨σ, rfl, hY⟩) (⟨σ', hX', hY'⟩ | ⟨σ', hX', hY'⟩)
    · have hσσ : σ = σ' := coneN_injective hX'
      subst hσσ
      exact Or.inl ⟨σ, rfl, (coneVal σ).inter_mem hY hY'⟩
    · exact absurd hX' (coneN_ne_singleton σ σ')
    · exact absurd hX'.symm (coneN_ne_singleton σ' σ)
    · have hσσ : σ = σ' := by rw [Set.singleton_eq_singleton_iff] at hX'; exact hX'
```

```
      subst hσσ
      exact Or.inr ⟨σ, rfl, (singVal σ).inter_mem hY hY'⟩
  mono := by
    rintro X X' Y Y' (⟨σ, rfl, hY⟩ | ⟨σ, rfl, hY⟩) hX'X hYY' hX' hY'
    · rcases hX' with ⟨τ, rfl⟩ | ⟨τ, rfl⟩
      · have hpre : σ <+: τ := coneN_subset_coneN.mp hX'X
        exact Or.inl ⟨τ, rfl, (coneVal τ).up_mem (hcone hpre Y hY) hY' hYY'⟩
      · have hpre : σ <+: τ := singleton_subset_coneN.mp hX'X
        exact Or.inr ⟨τ, rfl, (singVal τ).up_mem (hsing hpre Y hY) hY' hYY'⟩
    · rcases hX' with ⟨τ, rfl⟩ | ⟨τ, rfl⟩
      · exact absurd hX'X (not_coneN_subset_singleton τ σ)
      · have hτσ : τ = σ := by
          have hmem := Set.singleton_subset_iff.mp hX'X
          rwa [Set.mem_singleton_iff] at hmem
        subst hτσ
        exact Or.inr ⟨τ, rfl, (singVal τ).up_mem hY hY' hYY'⟩

end Lift

section Initial

variable {A : Type} [DecidableEq A] [Inhabited A] (B : TAlgebra (Tsig A))

def descMap : ApproximableMap (Cn A) B.carrier.sys :=
  liftCn B.carrier.sys (descVal B B.carrier.sys.bot) (descVal B (descE B))
    (fun {_ _} => descMap_hcone B) (fun {_ _} => descMap_hsing B)

end Initial

section Lift

variable {A : Type} [DecidableEq A] [Inhabited A] {β : Type}

theorem liftCn_strBot (V : NeighborhoodSystem β) (coneVal singVal : Strn A → V.Element
    )
    (hcone : ∀ {σ τ : Strn A}, σ <+: τ → coneVal σ ≤ coneVal τ)
    (hsing : ∀ {σ τ : Strn A}, σ <+: τ → coneVal σ ≤ singVal τ) (σ : Strn A) :
    (liftCn V coneVal singVal hcone hsing).toElementMap (strBotN σ) = coneVal σ := by
  apply NeighborhoodSystem.Element.ext
  intro Y
  constructor
  · rintro ⟨X, ⟨_, hsub⟩, hrel⟩
    rcases hrel with ⟨σ', hXcone, hY⟩ | ⟨σ', hXsing, hY⟩
    · have hpre : σ' <+: σ := coneN_subset_coneN.mp (hXcone ▶ hsub)
      exact hcone hpre Y hY
    · exact absurd (hXsing ▶ hsub) (not_coneN_subset_singleton σ σ')
  · intro hY
    exact ⟨coneN σ, ⟨memCn_coneN σ, subset_rfl⟩, Or.inl ⟨σ, rfl, hY⟩⟩

end Lift

section Initial

variable {A : Type} [DecidableEq A] [Inhabited A] (B : TAlgebra (Tsig A))

@[simp] theorem descMap_strBot (σ : Strn A) :
```

```
    (descMap B).toElementMap (strBotN σ) = descVal B B.carrier.sys.bot σ :=
  liftCn_strBot _ _ _ _ _ σ

end Initial

section Lift

variable {A : Type} [DecidableEq A] [Inhabited A] {β : Type}

theorem liftCn_strElem (V : NeighborhoodSystem β) (coneVal singVal : Strn A → V.
    Element)
    (hcone : ∀ {σ τ : Strn A}, σ <+: τ → coneVal σ ≤ coneVal τ)
    (hsing : ∀ {σ τ : Strn A}, σ <+: τ → coneVal σ ≤ singVal τ) (σ : Strn A) :
    (liftCn V coneVal singVal hcone hsing).toElementMap (strElemN σ) = singVal σ := by
  apply NeighborhoodSystem.Element.ext
  intro Y
  constructor
  · rintro ⟨X, ⟨_, hsub⟩, hrel⟩
    rcases hrel with ⟨σ', hXcone, hY⟩ | ⟨σ', hXsing, hY⟩
    · have hpre : σ' <+: σ := by
        apply singleton_subset_coneN.mp; rw [← hXcone]; exact hsub
      exact hsing hpre Y hY
    · have hσσ' : σ = σ' := by
        have hmem := Set.singleton_subset_iff.mp (hXsing ▸ hsub)
        rwa [Set.mem_singleton_iff] at hmem
      subst hσσ'; exact hY
  · intro hY
    exact ⟨{σ}, ⟨memCn_singleton σ, subset_rfl⟩, Or.inr ⟨σ, rfl, hY⟩⟩

end Lift

section Initial

variable {A : Type} [DecidableEq A] [Inhabited A] (B : TAlgebra (Tsig A))

@[simp] theorem descMap_strElem (σ : Strn A) :
    (descMap B).toElementMap (strElemN σ) = descVal B (descE B) σ :=
  liftCn_strElem _ _ _ _ _ σ

omit [Inhabited A] in

theorem Cn_bot_eq_strBotN_nil : (Cn A).bot = strBotN ([] : Strn A) := by
  apply NeighborhoodSystem.Element.ext
  intro Y
  show ((Cn A).mem Y ∧ (Cn A).master ⊆ Y) ↔ ((Cn A).mem Y ∧ coneN [] ⊆ Y)
  rw [Cn_master, coneN_nil]

theorem ccEquiv_comp_symm :
    (ofIso (ccEquiv (A := A))).comp (ofIso ccEquiv.symm) = idMap (CCn A) := by
  apply ext_of_toElementMap
  intro s
  rw [toElementMap_comp, toElementMap_ofIso, toElementMap_ofIso, toElementMap_idMap]
  exact ccEquiv.apply_symm_apply s

theorem ccEquiv_symm_comp :
    (ofIso (ccEquiv (A := A)).symm).comp (ofIso ccEquiv) = idMap (Cn A) := by
```

```
  apply ext_of_toElementMap

  intro x
  rw [toElementMap_comp, toElementMap_ofIso, toElementMap_ofIso, toElementMap_idMap]
  exact ccEquiv.symm_apply_apply x

theorem descMap_strict : IsStrict (descMap B) := by
  rw [isStrict_iff_apply_bot, Cn_bot_eq_strBotN_nil, descMap_strBot]
  rfl

def descStrict : ((Cnobj A) ⟶ B.carrier) := ⟨descMap B, descMap_strict B⟩

theorem genKeyBot (g : ApproximableMap (Cn A) B.carrier.sys) :
    B.str.1.toElementMap ((sumMapSig (A := A) (h₀ := Cn_nonempty) (h₁ := B.carrier.
    nonempty)
        g).toElementMap (toCC (strBotN ([] : Strn A))))
      = B.carrier.sys.bot := by
  have hb : toCC (strBotN ([] : Strn A)) = (CCn A).bot := by
    rw [← Cn_bot_eq_strBotN_nil, ← ccEquiv_apply]; exact ccEquiv.map_bot
  rw [hb, isStrict_iff_apply_bot.mp (isStrict_sumMapSig (A := A) (h₀ := Cn_nonempty)
    (h₁ := B.carrier.nonempty) g)]
  exact isStrict_iff_apply_bot.mp B.str.2

end Initial

section Iso

variable {A : Type} [DecidableEq A] [Inhabited A]
omit [Inhabited A] in

theorem toCC_consMapN (a : A) (z : (Cn A).Element) :
    toCC ((consMapN a).toElementMap z) = sinjC (h := Cn_nonempty) a z := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨rfl, hz⟩ | ⟨c, X, hX, rfl, hz⟩)
    · exact Or.inl rfl
    · exact absurd hz consMapN_not_mem_nil
    · by_cases hac : a = c
      · subst hac; exact Or.inr ⟨X, hX, rfl, (consMapN_mem_embA hX).mp hz⟩
      · exact absurd hz (consMapN_not_mem_embA_ne hac)
  · rintro (rfl | ⟨X, hX, rfl, hm⟩)
    · exact Or.inl rfl
    · exact Or.inr (Or.inr ⟨a, X, hX, rfl, (consMapN_mem_embA hX).mpr hm⟩)

end Iso

section Initial

variable {A : Type} [DecidableEq A] [Inhabited A] (B : TAlgebra (Tsig A))

omit [Inhabited A] in

theorem genKey (g : ApproximableMap (Cn A) B.carrier.sys) (a : A) (w : (Cn A).Element)
     :
    B.str.1.toElementMap ((sumMapSig (A := A) (h₀ := Cn_nonempty) (h₁ := B.carrier.
```

```
    nonempty)
        g).toElementMap (toCC ((consMapN a).toElementMap w)))
      = descF B a (g.toElementMap w) := by
  rw [toCC_consMapN, sumMapSig_sinjC]; rfl

end Initial

section Iso

variable {A : Type} [DecidableEq A] [Inhabited A]
omit [Inhabited A] in

theorem toCC_strElemN_nil :
    toCC (strElemN ([] : Strn A)) = sinjU (h := Cn_nonempty) := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨rfl, hz⟩ | ⟨a, X, hX, rfl, hz⟩)
    · exact Or.inl rfl
    · exact Or.inr rfl
    · exact absurd (hz.2 (Set.mem_singleton_iff.mpr rfl)) nil_not_mem_embA
  · rintro (rfl | rfl)
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨rfl, memCn_singleton [], subset_rfl⟩)

end Iso

section Initial

variable {A : Type} [DecidableEq A] [Inhabited A] (B : TAlgebra (Tsig A))

omit [Inhabited A] in

theorem genKey0 (g : ApproximableMap (Cn A) B.carrier.sys) :
    B.str.1.toElementMap ((sumMapSig (A := A) (h₀ := Cn_nonempty) (h₁ := B.carrier.
    nonempty)
        g).toElementMap (toCC (strElemN ([] : Strn A))))
      = descE B := by
  rw [toCC_strElemN_nil, sumMapSig_sinjU]; rfl

theorem descMap_satisfiesRec :
    descMap B = (B.str.1.comp (sumMapSig (A := A) (h₀ := Cn_nonempty) (h₁ := B.carrier.
    nonempty)
        (descMap B))).comp (ofIso ccEquiv) := by
  apply map_ext_Cn
  · intro σ
    rw [toElementMap_comp, toElementMap_comp, toElementMap_ofIso, descMap_strBot]
    cases σ with
    | nil => exact (genKeyBot B (descMap B)).symm
    | cons a σ =>
      rw [ccEquiv_apply, ← consMapN_strBot]
      have h := genKey B (descMap B) a (strBotN σ)
      rw [descMap_strBot] at h
      exact h.symm
  · intro σ
    rw [toElementMap_comp, toElementMap_comp, toElementMap_ofIso, descMap_strElem]
```

```
    cases σ with
    | nil => exact (genKey0 B (descMap B)).symm
    | cons a σ =>
      rw [ccEquiv_apply, ← consMapN_strElem]
      have h := genKey B (descMap B) a (strElemN σ)
      rw [descMap_strElem] at h
      exact h.symm

theorem descComm : (descMap B).comp (ofIso ccEquiv.symm)
    = B.str.1.comp (sumMapSig (A := A) (h₀ := Cn_nonempty) (h₁ := B.carrier.nonempty)
        (descMap B)) := by
  conv_lhs => rw [descMap_satisfiesRec B]
  rw [comp_assoc, ccEquiv_comp_symm, comp_idMap]

def descAlgHom : AlgHom (Cnalg A) B where
  hom := descStrict B
  comm := by
    apply Subtype.ext
    simp only [StrictDomainObj.comp_val]
    exact descComm B

theorem rec_determines (g : ApproximableMap (Cn A) B.carrier.sys)
    (hg : g = (B.str.1.comp (sumMapSig (A := A) (h₀ := Cn_nonempty) (h₁ := B.carrier.
    nonempty)
        g)).comp (ofIso ccEquiv)) :
    g = descMap B := by
  have hbot : ∀ σ, g.toElementMap (strBotN σ) = descVal B B.carrier.sys.bot σ := by
    intro σ
    induction σ with
    | nil =>
      conv_lhs => rw [hg]
      rw [toElementMap_comp, toElementMap_comp, toElementMap_ofIso, ccEquiv_apply]
      exact genKeyBot B g
    | cons a σ ih =>
      conv_lhs => rw [hg]
      rw [toElementMap_comp, toElementMap_comp, toElementMap_ofIso, ccEquiv_apply,
        ← consMapN_strBot]
      have h := genKey B g a (strBotN σ)
      rw [ih] at h
      exact h
  have helem : ∀ σ, g.toElementMap (strElemN σ) = descVal B (descE B) σ := by
    intro σ
    induction σ with
    | nil =>
      conv_lhs => rw [hg]
      rw [toElementMap_comp, toElementMap_comp, toElementMap_ofIso, ccEquiv_apply]
      exact genKey0 B g
    | cons a σ ih =>
      conv_lhs => rw [hg]
      rw [toElementMap_comp, toElementMap_comp, toElementMap_ofIso, ccEquiv_apply,
        ← consMapN_strElem]
      have h := genKey B g a (strElemN σ)
      rw [ih] at h
      exact h
  apply map_ext_Cn
  · intro σ; rw [hbot, descMap_strBot]
```

```
  · intro σ; rw [helem, descMap_strElem]

theorem descAlgHom_uniq (h' : AlgHom (Cnalg A) B) : h' = descAlgHom B := by
  obtain ⟨hom, comm⟩ := h'
  have hg : hom.1 = descMap B := by
    refine rec_determines B hom.1 ?_
    have hc : hom.1.comp (ofIso ccEquiv.symm)
        = B.str.1.comp (sumMapSig (A := A) (h₀ := Cn_nonempty) (h₁ := B.carrier.
    nonempty) hom.1) := by
      exact congrArg Subtype.val comm
    have h2 := congrArg (fun m => m.comp (ofIso ccEquiv)) hc
    simp only at h2
    rw [comp_assoc] at h2
    erw [ccEquiv_symm_comp, comp_idMap] at h2
    exact h2
  have hhom : hom = descStrict B := Subtype.ext hg
  subst hhom
  rfl

end Initial

def CnisInitial (A : Type) [DecidableEq A] [Inhabited A] : IsInitial (Cnalg A) where
  desc := descAlgHom
  uniq := fun B h => descAlgHom_uniq B h

def CfinIsInitial (n : ℕ) : IsInitial (Cnalg (Fin (n + 1))) := CnisInitial (Fin (n +
    1))

theorem Cn_domain_equation (A : Type) [DecidableEq A] [Inhabited A] :
    Cn A ≅? CCn A := ⟨ccEquiv⟩

end

section
set_option linter.unusedVariables false

theorem example_617_gen : ∀ (A : Type) [inst : DecidableEq A] [Inhabited A],
  @DomainTheory.NeighbourhoodSystems.Isomorphic (DomainTheory.NeighbourhoodSystems.
    Exercise617Gen.Strn A)
    (DomainTheory.NeighbourhoodSystems.Exercise617Gen.SigTok A
      (DomainTheory.NeighbourhoodSystems.Exercise617Gen.Strn A))
    (@DomainTheory.NeighbourhoodSystems.Exercise617Gen.Cn A inst)
    (@DomainTheory.NeighbourhoodSystems.Exercise617Gen.CCn A inst) :=
  DomainTheory.NeighbourhoodSystems.Exercise617Gen.Cn_domain_equation
end

section
variable {A : Type} [DecidableEq A]

theorem Cfin_domain_equation (n : ℕ) : Cn (Fin (n + 1)) ≅? CCn (Fin (n + 1)) :=
  Cn_domain_equation (Fin (n + 1))
end

section
variable {A : Type}
```

```
section Iso

theorem embA_ne {a a' : A} (h : a = a') {X Y : Set (Strn A)} (hX : X.Nonempty) :
    embA a X = embA a' Y := by
  intro heq
  obtain ⟨w', hw'⟩ := hX
  have hmem : (a :: w') ∈ embA a' Y := heq ▸ (⟨w', rfl, hw'⟩ : (a :: w') ∈ embA a X)
  obtain ⟨w'', he, -⟩ := hmem
  rw [List.cons.injEq] at he; exact h he.1

end Iso

section Iso

theorem embA_nonempty {a : A} {X : Set (Strn A)} (hX : X.Nonempty) : (embA a X).
    Nonempty := by
  obtain ⟨w', hw'⟩ := hX; exact ⟨a :: w', w', rfl, hw'⟩

end Iso

end

end DomainTheory.NeighbourhoodSystems.Exercise617Gen
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

section
namespace Exercise618

variable {α : Type*} {V : NeighborhoodSystem α}

def consSeq (a : V.Element) (b : (iterSys V).Element) : ℕ → V.Element :=
  fun i => Nat.casesOn i a (fun k => component b k)

@[simp] theorem consSeq_zero (a : V.Element) (b : (iterSys V).Element) : consSeq a b 0
     = a := rfl

@[simp] theorem consSeq_succ (a : V.Element) (b : (iterSys V).Element) (k : ℕ) :
    consSeq a b (k + 1) = component b k := rfl

theorem iterBot_eq : (iterSys V).bot = ofSeq (fun _ : ℕ => V.bot) := by
  apply Element.ext
  intro W
  rw [mem_bot, mem_ofSeq]
  constructor
  · rintro rfl
    refine ⟨(iterSys V).master_mem, fun i => ?_⟩
    rw [fiber_iterSys_master, mem_bot]
  · rintro ⟨_, hfib⟩
    apply eq_of_fiber_eq
    intro i
    have hi := hfib i
    rw [fiber_iterSys_master]
    rwa [mem_bot] at hi

@[simp] theorem component_bot (n : ℕ) : component (iterSys V).bot n = V.bot := by
```

```
  rw [iterBot_eq, component_ofSeq]

theorem chain_le_of_succ {β : Type*} {W : NeighborhoodSystem β} {a : ℕ → W.Element}
    (h : ∀ n, a n ≤ a (n + 1)) {i j : ℕ} (hij : i ≤ j) : a i ≤ a j := by
  induction hij with
  | refl => exact le_rfl
  | step _ ih => exact ih.trans (h _)

section Target

variable {? : Type*} {E : NeighborhoodSystem ?}

theorem constBot_le (f : ApproximableMap (iterSys V) E) :
    constMap (iterSys V) E.bot ≤ f := by
  intro X Y hrel
  obtain ⟨hX, hY⟩ := hrel
  rw [mem_bot] at hY; subst hY
  exact f.rel_master hX

end Target

def imap (V : NeighborhoodSystem α) : ApproximableMap (prod V (iterSys V)) (iterSys V)
     :=
  ofIso (iterProdIso V).symm

theorem isStrict_imap : IsStrict (imap V) := isStrict_ofIso _

theorem iterProdIso_apply (z : (iterSys V).Element) :
    iterProdIso V z = pair (component z 0) (ofSeq (fun n => component z (n + 1))) :=
    rfl

theorem iterProdIso_symm_pair (a : V.Element) (b : (iterSys V).Element) :
    (iterProdIso V).symm (pair a b) = ofSeq (consSeq a b) := by
  have hkey : iterProdIso V (ofSeq (consSeq a b)) = pair a b := by
    rw [iterProdIso_apply]
    congr 1
    · rw [component_ofSeq, consSeq_zero]
    · have : (fun n => component (ofSeq (consSeq a b)) (n + 1)) = fun n => component b
    n := by
        funext n; rw [component_ofSeq, consSeq_succ]
      rw [this, ofSeq_component]
  rw [← hkey, OrderIso.symm_apply_apply]

end Exercise618
end

section
namespace Exercise618

theorem iterSys_nonempty {α : Type*} {V : NeighborhoodSystem α}
    (h : ∀ X, V.mem X → X.Nonempty) :
    ∀ W, (iterSys V).mem W → W.Nonempty := by
  rintro W ⟨hfib, _⟩
  obtain ⟨a, ha⟩ := h (fiber W 0) (hfib 0)
  exact ⟨(0, a), ha⟩
```

```
end Exercise618
end

section
namespace Exercise618

variable {α : Type*} {V : NeighborhoodSystem α}

def iterObj (Dom : StrictDomainObj.{w}) : StrictDomainObj.{w} where
  carrier := ℕ × Dom.carrier
  sys := iterSys Dom.sys
  nonempty := iterSys_nonempty Dom.nonempty

def jmap (V : NeighborhoodSystem α) : ApproximableMap (iterSys V) (prod V (iterSys V))
    :=
  ofIso (iterProdIso V)

section Target

variable {? : Type*} {E : NeighborhoodSystem ?}

def descOp (k : ApproximableMap (prod V E) E) (f : ApproximableMap (iterSys V) E) :
    ApproximableMap (iterSys V) E :=
  k.comp ((prodMap (idMap V) f).comp (jmap V))

theorem descOp_apply (k : ApproximableMap (prod V E) E) (f : ApproximableMap (iterSys
    V) E)
    (z : (iterSys V).Element) :
    (descOp k f).toElementMap z
      = k.toElementMap (pair (component z 0)
          (f.toElementMap (ofSeq (fun n => component z (n + 1))))) := by
  simp only [descOp, jmap]
  rw [toElementMap_comp, toElementMap_comp, toElementMap_ofIso, iterProdIso_apply,
    toElementMap_prodMap_pair, toElementMap_idMap]

def descSeq (k : ApproximableMap (prod V E) E) : ℕ → ApproximableMap (iterSys V) E
  | 0 => constMap (iterSys V) E.bot
  | (n + 1) => descOp k (descSeq k n)

end Target

section Uniq

variable {? : Type*} {E : NeighborhoodSystem ?}

theorem gcomp_rho_succ (k : ApproximableMap (prod V E) E) (g : ApproximableMap (
    iterSys V) E)
    (hc : g.comp (imap V) = k.comp (prodMap (idMap V) g)) (n : ℕ) :
    g.comp (descSeq (imap V) (n + 1)) = descOp k (g.comp (descSeq (imap V) n)) := by
  show g.comp ((imap V).comp ((prodMap (idMap V) (descSeq (imap V) n)).comp (jmap V)))
    = k.comp ((prodMap (idMap V) (g.comp (descSeq (imap V) n))).comp (jmap V))
  rw [← comp_assoc, hc, comp_assoc]
  congr 1
  rw [← comp_assoc, ← prodMap_comp, idMap_comp]

theorem gcomp_rho_zero (g : ApproximableMap (iterSys V) E) (hg : IsStrict g) :
```

```
    g.comp (descSeq (imap V) 0) = constMap (iterSys V) E.bot := by
  apply ext_of_toElementMap
  intro x
  rw [toElementMap_comp, toElementMap_constMap,
    show descSeq (imap V) 0 = constMap (iterSys V) (iterSys V).bot from rfl,
    toElementMap_constMap, isStrict_iff_apply_bot.mp hg]

end Uniq

theorem jmap_comp_imap : (jmap V).comp (imap V) = idMap (prod V (iterSys V)) := by
  apply ext_of_toElementMap
  intro w
  simp only [jmap, imap]
  rw [toElementMap_comp, toElementMap_ofIso, toElementMap_ofIso, toElementMap_idMap,
    OrderIso.apply_symm_apply]

section Target

variable {? : Type*} {E : NeighborhoodSystem ?}

def kHead (k : ApproximableMap (prod V E) E) (a : V.Element) :
    ApproximableMap E E :=
  k.comp (paired (constMap E a) (idMap E))

theorem kHead_apply (k : ApproximableMap (prod V E) E) (a : V.Element) (u : E.Element)
    :
    (kHead k a).toElementMap u = k.toElementMap (pair a u) := by
  rw [kHead, toElementMap_comp, toElementMap_paired, toElementMap_constMap,
    toElementMap_idMap]



end Target

theorem pair_bot {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
    :
    pair V₀.bot V₁.bot = (prod V₀ V₁).bot := by
  apply Element.ext
  intro W
  rw [mem_bot, prod_master]
  constructor
  · rintro ⟨X, Y, hX, hY, rfl⟩
    rw [mem_bot] at hX hY; subst hX; subst hY; rfl
  · rintro rfl
    exact ⟨V₀.master, V₁.master, V₀.bot.master_mem, V₁.bot.master_mem, rfl⟩

section Target

variable {? : Type*} {E : NeighborhoodSystem ?}

theorem descSeq_strict (k : ApproximableMap (prod V E) E) (hk : IsStrict k) :
    ∀ n, IsStrict (descSeq k n)
  | 0 => isStrict_constBot
  | (n + 1) => by
      have ih := descSeq_strict k hk n
      rw [isStrict_iff_apply_bot] at ih ⊢
      rw [show descSeq k (n + 1) = descOp k (descSeq k n) from rfl, descOp_apply]
```

```
      have htl : ofSeq (fun m => component (iterSys V).bot (m + 1)) = (iterSys V).bot
    := by
        have hconst : (fun m => component (iterSys V).bot (m + 1)) = (fun _ => V.bot)
    := by
          funext m; rw [component_bot]
        rw [hconst, ← iterBot_eq]
      rw [component_bot, htl, ih, pair_bot]
      exact isStrict_iff_apply_bot.mp hk

end Target

theorem isStrict_prodMap {α β α' β' : Type*} {V₀ : NeighborhoodSystem α} {V₁ :
    NeighborhoodSystem β}
    {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'}
    {f₀ : ApproximableMap V₀ V₀'} {f₁ : ApproximableMap V₁ V₁'}
    (hf₀ : IsStrict f₀) (hf₁ : IsStrict f₁) : IsStrict (prodMap f₀ f₁) := by
  rw [isStrict_iff_apply_bot, show (prod V₀ V₁).bot = pair V₀.bot V₁.bot from pair_bot.
    symm,
    toElementMap_prodMap_pair, isStrict_iff_apply_bot.mp hf₀, isStrict_iff_apply_bot.mp
     hf₁]
  exact pair_bot

end Exercise618
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise618
section
set_option linter.unusedVariables false

theorem example_618.{u_2, u_3, u_4, u_5} : ∀ {α : Type u_2} {β : Type u_3} {α' : Type
    u_4} {β' : Type u_5}
  {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
  {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
  {f₀ : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀'}
  {f₁ : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'},
  @DomainTheory.NeighbourhoodSystems.Exercise510.IsStrict α α' V₀ V₀' f₀ →
    @DomainTheory.NeighbourhoodSystems.Exercise510.IsStrict β β' V₁ V₁' f₁ →
      @DomainTheory.NeighbourhoodSystems.Exercise510.IsStrict (Sum α β) (Sum α' β')
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) (@DomainTheory.
    NeighbourhoodSystems.prod α' β' V₀' V₁')
        (@DomainTheory.NeighbourhoodSystems.prodMap α β α' β' V₀ V₁ V₀' V₁' f₀ f₁) :=
  @DomainTheory.NeighbourhoodSystems.Exercise618.isStrict_prodMap
end

end DomainTheory.NeighbourhoodSystems.Exercise618
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

namespace Exercise618

variable {α : Type*} {V : NeighborhoodSystem α}
```

```
theorem prodMap_idMap_mono {? : Type*} {E : NeighborhoodSystem ?}
    {f f' : ApproximableMap (iterSys V) E} (h : f ≤ f') :
    prodMap (idMap V) f ≤ prodMap (idMap V) f' := by
  intro W P hrel
  simp only [prodMap, paired_rel] at hrel ⊢
  exact ⟨hrel.1, hrel.2.1, comp_mono_gen h le_rfl _ _ hrel.2.2⟩

section Target

variable {? : Type*} {E : NeighborhoodSystem ?}

theorem descOp_mono (k : ApproximableMap (prod V E) E) {f f' : ApproximableMap (
    iterSys V) E}
    (h : f ≤ f') : descOp k f ≤ descOp k f' :=
  comp_mono_gen le_rfl (comp_mono_gen (prodMap_idMap_mono h) le_rfl)

theorem descSeq_mono_succ (k : ApproximableMap (prod V E) E) (n : ℕ) :
    descSeq k n ≤ descSeq k (n + 1) := by
  induction n with
  | zero => exact constBot_le _
  | succ m ih => exact descOp_mono k ih

theorem descSeq_mono (k : ApproximableMap (prod V E) E) {n m : ℕ} (h : n ≤ m) :
    descSeq k n ≤ descSeq k m := by
  induction h with
  | refl => exact le_rfl
  | step _ ih => exact ih.trans (descSeq_mono_succ k _)

theorem descSeq_dir (k : ApproximableMap (prod V E) E) :
    ∀ i j, ∃ l, (∀ X Y, (descSeq k i).rel X Y → (descSeq k l).rel X Y) ∧
      (∀ X Y, (descSeq k j).rel X Y → (descSeq k l).rel X Y) :=
  fun i j => ⟨max i j, fun _ _ => descSeq_mono k (le_max_left i j) _ _,
    fun _ _ => descSeq_mono k (le_max_right i j) _ _⟩

def descMap (k : ApproximableMap (prod V E) E) : ApproximableMap (iterSys V) E :=
  iSupMap (descSeq k) (descSeq_dir k)

theorem descMap_toElementMap (k : ApproximableMap (prod V E) E) (z : (iterSys V).
    Element)
    {Y : Set ?} :
    ((descMap k).toElementMap z).mem Y ↔ ∃ n, ((descSeq k n).toElementMap z).mem Y :=
  mem_toElementMap_iSupMap (descSeq k) (descSeq_dir k) z

theorem descMap_strict (k : ApproximableMap (prod V E) E) (hk : IsStrict k) :
    IsStrict (descMap k) := by
  rw [isStrict_iff_apply_bot]
  apply Element.ext
  intro Y
  rw [mem_bot, descMap_toElementMap]
  constructor
  · rintro ⟨n, hn⟩
    have hs := descSeq_strict k hk n
    rw [isStrict_iff_apply_bot] at hs
    rw [hs, mem_bot] at hn
    exact hn
  · rintro rfl
```

```
    have hs := descSeq_strict k hk 0
    rw [isStrict_iff_apply_bot] at hs
    exact ⟨0, by rw [hs]; exact E.bot.master_mem⟩

end Target

end Exercise618
end

section
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

namespace Exercise618

theorem prod_nonempty {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ :
    NeighborhoodSystem β}
    (h₀ : ∀ X, V₀.mem X → X.Nonempty) (_h₁ : ∀ Y, V₁.mem Y → Y.Nonempty) :
    ∀ W, (prod V₀ V₁).mem W → W.Nonempty := by
  rintro W ⟨X, Y, hX, _, rfl⟩
  obtain ⟨a, ha⟩ := h₀ X hX
  exact ⟨Sum.inl a, mem_prodNbhd_inl.mpr ha⟩

end Exercise618
end

section
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

namespace Exercise618

variable {α : Type*} {V : NeighborhoodSystem α}

def prodObj (Dom X : StrictDomainObj.{w}) : StrictDomainObj.{w} where
  carrier := Dom.carrier ? X.carrier
  sys := prod Dom.sys X.sys
  nonempty := prod_nonempty Dom.nonempty X.nonempty

def prodMapHom (Dom : StrictDomainObj.{w}) {X Y : StrictDomainObj.{w}} (f : (X ⟶ Y))
    :
    ((prodObj Dom X) ⟶ (prodObj Dom Y)) :=
  ⟨prodMap (idMap Dom.sys) f.1, isStrict_prodMap isStrict_idMap f.2⟩

def prodFunctor (Dom : StrictDomainObj.{w}) : Endofunctor StrictDomainObj.{w} where
  obj := prodObj Dom
  map := prodMapHom Dom
  map_id X := Subtype.ext (by
    show prodMap (idMap Dom.sys) (idMap X.sys) = idMap (prod Dom.sys X.sys)
    exact prodMap_id)
  map_comp {X Y Z} g f := Subtype.ext (by
    show prodMap (idMap Dom.sys) (g.1.comp f.1)
       = (prodMap (idMap Dom.sys) g.1).comp (prodMap (idMap Dom.sys) f.1)
    have h := prodMap_comp (idMap Dom.sys) (idMap Dom.sys) g.1 f.1
    rw [idMap_comp] at h
    exact h)

def iterAlg (Dom : StrictDomainObj.{w}) : TAlgebra (prodFunctor Dom) where
```

```
  carrier := iterObj Dom
  str := ⟨imap Dom.sys, isStrict_imap⟩

theorem rho_apply (n : ℕ) (z : (iterSys V).Element) :
    (descSeq (imap V) n).toElementMap z
      = ofSeq (fun i => if i < n then component z i else V.bot) := by
  induction n generalizing z with
  | zero =>
    show (constMap (iterSys V) (iterSys V).bot).toElementMap z = _
    rw [toElementMap_constMap, iterBot_eq]
    congr 1
  | succ n ih =>
    rw [show descSeq (imap V) (n + 1) = descOp (imap V) (descSeq (imap V) n) from rfl,
      descOp_apply, ih]
    simp only [imap]
    rw [toElementMap_ofIso, iterProdIso_symm_pair]
    congr 1
    funext j
    cases j with
    | zero =>
      show component z 0 = if (0 : ℕ) < n + 1 then component z 0 else V.bot
      rw [ite_eq_left (Nat.zero_lt_succ n)]
    | succ k =>
      rw [consSeq_succ, component_ofSeq, component_ofSeq]
      show (if k < n then component z (k + 1) else V.bot)
         = if k + 1 < n + 1 then component z (k + 1) else V.bot
      by_cases h : k < n
      · rw [ite_eq_left h, ite_eq_left (Nat.succ_lt_succ h)]
      · rw [ite_eq_right h, ite_eq_right (fun hc => h (Nat.lt_of_succ_lt_succ hc))]

theorem iSupRho_eq_id : descMap (imap V) = idMap (iterSys V) := by
  apply ext_of_toElementMap
  intro z
  rw [toElementMap_idMap]
  apply Element.ext
  intro Y
  rw [descMap_toElementMap]
  constructor
  · rintro ⟨n, hn⟩
    have hle : (descSeq (imap V) n).toElementMap z ≤ z := by
      rw [rho_apply]
      have hz : z = ofSeq (fun i => component z i) := (ofSeq_component z).symm
      conv_rhs => rw [hz]
      apply ofSeq_mono
      intro i
      show (if i < n then component z i else V.bot) ≤ component z i
      split
      · exact le_rfl
      · exact V.bot_le _
    exact hle Y hn
  · intro hzY
    have hY : (iterSys V).mem Y := z.sub hzY
    obtain ⟨N, hN⟩ := hY.2
    have hcomp : ∀ i, (component z i).mem (fiber Y i) := by
      have h := hzY
      rw [← ofSeq_component z] at h
```

```
      rw [mem_ofSeq] at h
      exact h.2
    refine ⟨N, ?_⟩
    rw [rho_apply, mem_ofSeq]
    refine ⟨hY, fun i => ?_⟩
    show (if i < N then component z i else V.bot).mem (fiber Y i)
    by_cases h : i < N
    · rw [ite_eq_left h]; exact hcomp i
    · rw [ite_eq_right h, hN i (not_lt.mp h)]; exact V.bot.master_mem

section Uniq

variable {? : Type*} {E : NeighborhoodSystem ?}

theorem comm_unique (k : ApproximableMap (prod V E) E)
    {g g' : ApproximableMap (iterSys V) E} (hg : IsStrict g) (hg' : IsStrict g')
    (hc : g.comp (imap V) = k.comp (prodMap (idMap V) g))
    (hc' : g'.comp (imap V) = k.comp (prodMap (idMap V) g')) : g = g' := by
  have hindep : ∀ n, g.comp (descSeq (imap V) n) = g'.comp (descSeq (imap V) n) := by
    intro n
    induction n with
    | zero => rw [gcomp_rho_zero g hg, gcomp_rho_zero g' hg']
    | succ m ih => rw [gcomp_rho_succ k g hc m, gcomp_rho_succ k g' hc' m, ih]
  have key : g.comp (descMap (imap V)) = g'.comp (descMap (imap V)) := by
    apply ApproximableMap.ext
    intro X Z
    simp only [descMap, comp_rel]
    constructor
    · rintro ⟨Y, ⟨i, hXY⟩, hYZ⟩
      have hg : (g.comp (descSeq (imap V) i)).rel X Z := ⟨Y, hXY, hYZ⟩
      rw [hindep i] at hg
      obtain ⟨Y', hXY', hYZ'⟩ := hg
      exact ⟨Y', ⟨i, hXY'⟩, hYZ'⟩
    · rintro ⟨Y, ⟨i, hXY⟩, hYZ⟩
      have hg' : (g'.comp (descSeq (imap V) i)).rel X Z := ⟨Y, hXY, hYZ⟩
      rw [← hindep i] at hg'
      obtain ⟨Y', hXY', hYZ'⟩ := hg'
      exact ⟨Y', ⟨i, hXY'⟩, hYZ'⟩
  rw [iSupRho_eq_id] at key
  rwa [comp_idMap, comp_idMap] at key

end Uniq

theorem succChainDir {β : Type*} {W : NeighborhoodSystem β} (a : ℕ → W.Element)
    (h : ∀ n, a n ≤ a (n + 1)) : ∀ i j, ∃ l, a i ≤ a l ∧ a j ≤ a l :=
  fun i j => ⟨max i j, chain_le_of_succ h (le_max_left i j), chain_le_of_succ h (
    le_max_right i j)⟩

theorem toElementMap_le_of_le {β₀ β₁ : Type*} {W₀ : NeighborhoodSystem β₀}
    {W₁ : NeighborhoodSystem β₁} {f g : ApproximableMap W₀ W₁} (h : f ≤ g) (x : W₀.
    Element) :
    f.toElementMap x ≤ g.toElementMap x := by
  rintro Y ⟨X, hX, hrel⟩
  exact ⟨X, hX, h _ _ hrel⟩

section Target
```

```
variable {? : Type*} {E : NeighborhoodSystem ?}

theorem descSeqEltMono (k : ApproximableMap (prod V E) E) (x : (iterSys V).Element) :
    ∀ n, (descSeq k n).toElementMap x ≤ (descSeq k (n + 1)).toElementMap x :=
  fun n => toElementMap_le_of_le (descSeq_mono_succ k n) x

theorem descMap_eq (k : ApproximableMap (prod V E) E) (x : (iterSys V).Element) :
    (descMap k).toElementMap x
      = iSupDirected (fun n => (descSeq k n).toElementMap x)
          (succChainDir _ (descSeqEltMono k x)) := by
  apply Element.ext
  intro Y
  rw [descMap_toElementMap, mem_iSupDirected]

theorem descMap_fix (k : ApproximableMap (prod V E) E) : descMap k = descOp k (descMap
    k) := by
  apply ext_of_toElementMap
  intro z
  rw [descOp_apply, descMap_eq k (ofSeq (fun n => component z (n + 1))),
    ← kHead_apply k (component z 0), toElementMap_iSupDirected, descMap_eq k z]

  apply Element.ext
  intro Y
  rw [mem_iSupDirected, mem_iSupDirected]
  have hstep : ∀ m, (kHead k (component z 0)).toElementMap
        ((descSeq k m).toElementMap (ofSeq (fun n => component z (n + 1))))
      = (descSeq k (m + 1)).toElementMap z := by
    intro m
    rw [kHead_apply, show descSeq k (m + 1) = descOp k (descSeq k m) from rfl,
    descOp_apply]
  constructor
  · rintro ⟨n, hn⟩
    cases n with
    | zero => exact ⟨0, by rw [hstep 0]; exact descSeqEltMono k z 0 _ hn⟩
    | succ m => exact ⟨m, by rw [hstep m]; exact hn⟩
  · rintro ⟨m, hm⟩
    rw [hstep m] at hm
    exact ⟨m + 1, hm⟩

theorem descMap_comm (k : ApproximableMap (prod V E) E) :
    (descMap k).comp (imap V) = k.comp (prodMap (idMap V) (descMap k)) := by
  conv_lhs => rw [descMap_fix k]
  show (k.comp ((prodMap (idMap V) (descMap k)).comp (jmap V))).comp (imap V)
     = k.comp (prodMap (idMap V) (descMap k))
  rw [comp_assoc, comp_assoc, jmap_comp_imap, comp_idMap]

end Target

def descAlgHom (Dom : StrictDomainObj.{w}) (B : TAlgebra (prodFunctor Dom)) :
    AlgHom (iterAlg Dom) B where
  hom := ⟨descMap B.str.1, descMap_strict B.str.1 B.str.2⟩
  comm := by
    apply Subtype.ext
    show (descMap B.str.1).comp (imap Dom.sys)
       = B.str.1.comp (prodMap (idMap Dom.sys) (descMap B.str.1))
```

```
    exact descMap_comm B.str.1

end Exercise618
end
end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 6.17. What are the algebras for which C is initial? If A of 6.2 is a generalization of B, what is the corresponding generalization of C? Prove that it exists and explain what are the algebras involved.

3.7.20 Exercise 6.18 — infinite product as initial

Exercise_6_18.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_17

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Theorem_6_14

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510
namespace Exercise618
variable {α : Type*} {V : NeighborhoodSystem α}

def iterIsInitial (Dom : StrictDomainObj.{w}) : IsInitial (iterAlg Dom) where
  desc := descAlgHom Dom
  uniq B h := by
    obtain ⟨hom, comm⟩ := h
    have hcomm : hom.1.comp (imap Dom.sys)
        = B.str.1.comp (prodMap (idMap Dom.sys) hom.1) := congrArg Subtype.val comm
    have hg : hom.1 = descMap B.str.1 :=
      comm_unique B.str.1 hom.2 (descMap_strict B.str.1 B.str.2) hcomm (descMap_comm B
    .str.1)
    have hhom : hom = ⟨descMap B.str.1, descMap_strict B.str.1 B.str.2⟩ := Subtype.ext
    hg
    subst hhom
    rfl

end Exercise618
end

section
open NeighborhoodSystem

namespace Example61

variable {α : Type*}

section Equation
```

```
variable (D : NeighborhoodSystem α) (hD : ∀ X, D.mem X → X.Nonempty)

include hD

def toS (z : (Dsharp D hD).Element) : (sumSys D hD).Element where
  mem W := W = sumMaster D (prod (Dsharp D hD) (Dsharp D hD))
    ∨ (∃ X, D.mem X ∧ W = inj₀ X ∧ z.mem (embZero X))
    ∨ (∃ P Q, MemS D P ∧ MemS D Q ∧ W = inj₁ (prodNbhd P Q) ∧ z.mem (embPair P Q))
  sub := by
    rintro W (rfl | ⟨X, hX, rfl, -⟩ | ⟨P, Q, hP, hQ, rfl, -⟩)
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨X, hX, rfl⟩)
    · exact Or.inr (Or.inr ⟨prodNbhd P Q, prod_mem_prodNbhd hP hQ, rfl⟩)
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hzX⟩ | ⟨P, Q, hP, hQ, rfl, hzPQ⟩)
      (rfl | ⟨X', hX', rfl, hzX'⟩ | ⟨P', Q', hP', hQ', rfl, hzPQ'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr (Or.inl ⟨X', hX', by rw [sumMaster_inter_inj₀ hX'], hzX'⟩)
    · exact Or.inr (Or.inr ⟨P', Q', hP', hQ',
        by rw [sumMaster_inter_inj₁ (prod_mem_prodNbhd hP' hQ')], hzPQ'⟩)
    · exact Or.inr (Or.inl ⟨X, hX, by rw [Set.inter_comm, sumMaster_inter_inj₀ hX], hzX⟩
    )
    · refine Or.inr (Or.inl ⟨X ∩ X', ?_, by rw [inj₀_inter], ?_⟩)
      · have hz := z.inter_mem hzX hzX'; rw [embZero_inter] at hz
        exact memS_embZero_inv hD (z.sub hz)
      · have hz := z.inter_mem hzX hzX'; rwa [embZero_inter] at hz
    · exfalso
      have hz := z.inter_mem hzX hzPQ'; rw [embZero_inter_embPair] at hz
      obtain ⟨t, ht⟩ := memS_nonempty hD (z.sub hz); exact Set.notMem_empty t ht
    · exact Or.inr (Or.inr ⟨P, Q, hP, hQ,
        by rw [Set.inter_comm, sumMaster_inter_inj₁ (prod_mem_prodNbhd hP hQ)], hzPQ⟩)
    · exfalso
      have hz := z.inter_mem hzPQ hzX'; rw [Set.inter_comm, embZero_inter_embPair] at
    hz
      obtain ⟨t, ht⟩ := memS_nonempty hD (z.sub hz); exact Set.notMem_empty t ht
    · refine Or.inr (Or.inr ⟨P ∩ P', Q ∩ Q', ?_, ?_, by rw [inj₁_inter, prodNbhd_inter
    ], ?_⟩)
      · have hz := z.inter_mem hzPQ hzPQ'; rw [embPair_inter] at hz
        exact (memS_embPair_inv hD (z.sub hz)).1
      · have hz := z.inter_mem hzPQ hzPQ'; rw [embPair_inter] at hz
        exact (memS_embPair_inv hD (z.sub hz)).2
      · have hz := z.inter_mem hzPQ hzPQ'; rwa [embPair_inter] at hz
  up_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hzX⟩ | ⟨P, Q, hP, hQ, rfl, hzPQ⟩) hW' hsub
    · left
      exact eq_sumMaster_of_subset hW' hsub
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨V', hV', rfl⟩
      · exact Or.inl rfl
      · refine Or.inr (Or.inl ⟨X', hX', rfl, ?_⟩)
        exact z.up_mem hzX (MemS.zero hX') (embZero_subset.mpr (inj₀_subset_inj₀.mp
    hsub))
      · obtain ⟨a, ha⟩ := hD X hX
        exact absurd (hsub (il_mem_inj₀.mpr ha)) il_mem_inj₁
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨V', hV', rfl⟩
      · exact Or.inl rfl
```

```
      · obtain ⟨b, hb⟩ := prod_dsharp_nonempty D hD (prodNbhd P Q) (prod_mem_prodNbhd hP
     hQ)
        exact absurd (hsub (ir_mem_inj₁.mpr hb)) ir_mem_inj₀
      · obtain ⟨P', Q', hP', hQ', rfl⟩ := hV'
        refine Or.inr (Or.inr ⟨P', Q', hP', hQ', rfl, ?_⟩)
        obtain ⟨hPP, hQQ⟩ := prodNbhd_subset_iff.mp (inj₁_subset_inj₁.mp hsub)
        exact z.up_mem hzPQ (MemS.pair hP' hQ') (embPair_subset.mpr ⟨hPP, hQQ⟩)

@[simp] theorem toS_mem_inj₀ {z : (Dsharp D hD).Element} {X : Set α} (hX : D.mem X) :
    (toS D hD z).mem (inj₀ X) ↔ z.mem (embZero X) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hz⟩ | ⟨P, Q, hP, hQ, heq, hz⟩)
    · exact absurd (h0 ▶ none_mem_sumMaster) none_mem_inj₀
    · rwa [inj₀_injective heq]
    · obtain ⟨a, ha⟩ := hD X hX
      exact absurd (heq ▶ il_mem_inj₀.mpr ha) il_mem_inj₁
  · intro hz; exact Or.inr (Or.inl ⟨X, hX, rfl, hz⟩)

@[simp] theorem toS_mem_inj₁ {z : (Dsharp D hD).Element} {P Q : Set (List Bool × α)}
    (hP : MemS D P) (hQ : MemS D Q) :
    (toS D hD z).mem (inj₁ (prodNbhd P Q)) ↔ z.mem (embPair P Q) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hz⟩ | ⟨P', Q', hP', hQ', heq, hz⟩)
    · exact absurd (h0 ▶ none_mem_sumMaster) none_mem_inj₁
    · obtain ⟨a, ha⟩ := hD X' hX'
      exact absurd (heq ▶ il_mem_inj₀.mpr ha) il_mem_inj₁
    · obtain ⟨hPP, hQQ⟩ := prodNbhd_injective (inj₁_injective heq)
      rw [hPP, hQQ]; exact hz
  · intro hz; exact Or.inr (Or.inr ⟨P, Q, hP, hQ, rfl, hz⟩)

theorem embPair_ne_Gamma (P Q : Set (List Bool × α)) : embPair P Q = Gamma D := by
  intro h
  obtain ⟨a, ha⟩ := hD D.master D.master_mem
  have hmem : (([], a) : List Bool × α) ∈ Gamma D := ha
  rw [← h] at hmem
  rcases hmem with ⟨p', hp', -⟩ | ⟨q', hq', -⟩
  · simp at hp'
  · simp at hq'

theorem embZero_ne_Gamma (X : Set α) : embZero X = Gamma D := by
  intro h
  obtain ⟨a, ha⟩ := hD D.master D.master_mem
  have hmem : ((true :: [], a) : List Bool × α) ∈ Gamma D := ha
  rw [← h] at hmem; exact absurd hmem.1 (by simp)

theorem embZero_ne_embPair {X : Set α} (hX : D.mem X) (P Q : Set (List Bool × α)) :
    embZero X = embPair P Q := by
  intro h
  obtain ⟨a, ha⟩ := hD X hX
  have hmem : (([], a) : List Bool × α) ∈ embPair P Q := h ▶ (⟨rfl, ha⟩ : ([], a) ∈
    embZero X)
  rcases hmem with ⟨p', hp', -⟩ | ⟨q', hq', -⟩
  · simp at hp'
  · simp at hq'

def fromS (s : (sumSys D hD).Element) : (Dsharp D hD).Element where
```

```
mem W := W = Gamma D
  ∨ (∃ X, D.mem X ∧ W = embZero X ∧ s.mem (inj₀ X))
  ∨ (∃ P Q, MemS D P ∧ MemS D Q ∧ W = embPair P Q ∧ s.mem (inj₁ (prodNbhd P Q)))
sub := by
  rintro W (rfl | ⟨X, hX, rfl, -⟩ | ⟨P, Q, hP, hQ, rfl, -⟩)
  · exact MemS.gamma
  · exact MemS.zero hX
  · exact MemS.pair hP hQ
master_mem := Or.inl rfl
inter_mem := by
  rintro W W' (rfl | ⟨X, hX, rfl, hsX⟩ | ⟨P, Q, hP, hQ, rfl, hsPQ⟩)
    (rfl | ⟨X', hX', rfl, hsX'⟩ | ⟨P', Q', hP', hQ', rfl, hsPQ'⟩)
  · exact Or.inl (by rw [Set.inter_self])
  · exact Or.inr (Or.inl ⟨X', hX',
      by rw [Set.inter_eq_right.mpr (embZero_subset_Gamma hX')], hsX'⟩)
  · exact Or.inr (Or.inr ⟨P', Q', hP', hQ',
      by rw [Set.inter_eq_right.mpr
        (embPair_subset_Gamma (memS_subset_gamma hP') (memS_subset_gamma hQ'))],
  hsPQ'⟩)
  · exact Or.inr (Or.inl ⟨X, hX,
      by rw [Set.inter_eq_left.mpr (embZero_subset_Gamma hX)], hsX⟩)
  · refine Or.inr (Or.inl ⟨X ∩ X', ?_, by rw [embZero_inter], ?_⟩)
    · have hs := s.inter_mem hsX hsX'; rw [inj₀_inter] at hs
      exact sum_mem_inj₀_inv D hD (s.sub hs)
    · have hs := s.inter_mem hsX hsX'; rwa [inj₀_inter] at hs
  · exfalso
    have hs := s.inter_mem hsX hsPQ'; rw [inj₀_inter_inj₁] at hs
    obtain ⟨t, ht⟩ := sumSys_mem_nonempty D hD (s.sub hs); exact Set.notMem_empty t
  ht
  · exact Or.inr (Or.inr ⟨P, Q, hP, hQ,
      by rw [Set.inter_eq_left.mpr
        (embPair_subset_Gamma (memS_subset_gamma hP) (memS_subset_gamma hQ))], hsPQ⟩)
  · exfalso
    have hs := s.inter_mem hsPQ hsX'; rw [Set.inter_comm, inj₀_inter_inj₁] at hs
    obtain ⟨t, ht⟩ := sumSys_mem_nonempty D hD (s.sub hs); exact Set.notMem_empty t
  ht
  · refine Or.inr (Or.inr ⟨P ∩ P', Q ∩ Q', ?_, ?_, by rw [embPair_inter], ?_⟩)
    · have hs := s.inter_mem hsPQ hsPQ'; rw [inj₁_inter, prodNbhd_inter] at hs
      exact (prod_mem_prodNbhd_iff.mp (sum_mem_inj₁_inv D hD (s.sub hs))).1
    · have hs := s.inter_mem hsPQ hsPQ'; rw [inj₁_inter, prodNbhd_inter] at hs
      exact (prod_mem_prodNbhd_iff.mp (sum_mem_inj₁_inv D hD (s.sub hs))).2
    · have hs := s.inter_mem hsPQ hsPQ'; rw [inj₁_inter, prodNbhd_inter] at hs; exact
   hs
up_mem := by
  rintro W W' (rfl | ⟨X, hX, rfl, hsX⟩ | ⟨P, Q, hP, hQ, rfl, hsPQ⟩) hW' hsub
  · exact Or.inl (Set.Subset.antisymm (memS_subset_gamma hW') hsub)
  · cases hW' with
    | gamma => exact Or.inl rfl
    | @zero X' hX' =>
      refine Or.inr (Or.inl ⟨X', hX', rfl, ?_⟩)
      exact s.up_mem hsX (Or.inr (Or.inl ⟨X', hX', rfl⟩))
        (inj₀_subset_inj₀.mpr (embZero_subset.mp hsub))
    | @pair P' Q' hP' hQ' =>
      exfalso
      obtain ⟨a, ha⟩ := hD X hX
      have hmem : (([], a) : List Bool × α) ∈ embPair P' Q' := hsub ⟨rfl, ha⟩
```

```
        rcases hmem with ⟨p', hp', -⟩ | ⟨q', hq', -⟩
        · simp at hp'
        · simp at hq'
    · cases hW' with
      | gamma => exact Or.inl rfl
      | @zero X' hX' =>
        exfalso
        obtain ⟨t, ht⟩ := embPair_nonempty (memS_nonempty hD hP) (Q := Q)
        have hcons : t.1 = [] := by
          rcases ht with ⟨p', hp', -⟩ | ⟨q', hq', -⟩
          · simp [hp']
          · simp [hq']
        have hz : t ∈ embZero X' := hsub ht
        exact hcons hz.1
      | @pair P' Q' hP' hQ' =>
        refine Or.inr (Or.inr ⟨P', Q', hP', hQ', rfl, ?_⟩)
        obtain ⟨hPP, hQQ⟩ := embPair_subset.mp hsub
        exact s.up_mem hsPQ (Or.inr (Or.inr ⟨prodNbhd P' Q', prod_mem_prodNbhd hP' hQ',
     rfl⟩))
          (inj₁_subset_inj₁.mpr (prodNbhd_subset_iff.mpr ⟨hPP, hQQ⟩))

@[simp] theorem fromS_mem_embZero {s : (sumSys D hD).Element} {X : Set α} (hX : D.mem
    X) :
    (fromS D hD s).mem (embZero X) ↔ s.mem (inj₀ X) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hs⟩ | ⟨P, Q, hP, hQ, heq, hs⟩)
    · exact absurd h0 (embZero_ne_Gamma D hD X)
    · rwa [embZero_injective heq]
    · exact absurd heq (embZero_ne_embPair D hD hX P Q)
  · intro hs; exact Or.inr (Or.inl ⟨X, hX, rfl, hs⟩)

@[simp] theorem fromS_mem_embPair {s : (sumSys D hD).Element} {P Q : Set (List Bool ×
    α)}
    (hP : MemS D P) (hQ : MemS D Q) :
    (fromS D hD s).mem (embPair P Q) ↔ s.mem (inj₁ (prodNbhd P Q)) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hs⟩ | ⟨P', Q', hP', hQ', heq, hs⟩)
    · exact absurd h0 (embPair_ne_Gamma D hD P Q)
    · exact absurd heq.symm (embZero_ne_embPair D hD hX' P Q)
    · obtain ⟨hPP, hQQ⟩ := embPair_injective heq
      rw [hPP, hQQ]; exact hs
  · intro hs; exact Or.inr (Or.inr ⟨P, Q, hP, hQ, rfl, hs⟩)

theorem fromS_toS (z : (Dsharp D hD).Element) : fromS D hD (toS D hD z) = z := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨X, hX, rfl, hs⟩ | ⟨P, Q, hP, hQ, rfl, hs⟩)
    · exact z.master_mem
    · exact (toS_mem_inj₀ D hD hX).mp hs
    · exact (toS_mem_inj₁ D hD hP hQ).mp hs
  · intro hW
    cases z.sub hW with
    | gamma => exact Or.inl rfl
    | @zero X hX => exact Or.inr (Or.inl ⟨X, hX, rfl, (toS_mem_inj₀ D hD hX).mpr hW⟩)
```

```
    | @pair P Q hP hQ => exact Or.inr (Or.inr ⟨P, Q, hP, hQ, rfl, (toS_mem_inj₁ D hD hP
     hQ).mpr hW⟩)

def inSharp (x : D.Element) : (Dsharp D hD).Element where
  mem W := W = Gamma D ∨ ∃ X, x.mem X ∧ W = embZero X
  sub := by
    rintro W (rfl | ⟨X, hX, rfl⟩)
    · exact MemS.gamma
    · exact MemS.zero (x.sub hX)
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl⟩) (rfl | ⟨X', hX', rfl⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr ⟨X', hX', by rw [Set.inter_eq_right.mpr (embZero_subset_Gamma (x.sub
     hX'))]⟩
    · exact Or.inr ⟨X, hX, by rw [Set.inter_eq_left.mpr (embZero_subset_Gamma (x.sub hX
    ))]⟩
    · exact Or.inr ⟨X ∩ X', x.inter_mem hX hX', by rw [embZero_inter]⟩
  up_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl⟩) hW' hsub
    · exact Or.inl (Set.Subset.antisymm (memS_subset_gamma hW') hsub)
    · cases hW' with
      | gamma => exact Or.inl rfl
      | @zero X' hX' => exact Or.inr ⟨X', x.up_mem hX hX' (embZero_subset.mp hsub), rfl
    ⟩
      | @pair P Q hP hQ =>
        exfalso
        obtain ⟨a, ha⟩ := hD X (x.sub hX)
        have hmem : (([], a) : List Bool × α) ∈ embPair P Q := hsub ⟨rfl, ha⟩
        rcases hmem with ⟨p', hp', -⟩ | ⟨q', hq', -⟩
        · simp at hp'
        · simp at hq'

def pairSharp (x y : (Dsharp D hD).Element) : (Dsharp D hD).Element where
  mem W := W = Gamma D ∨ ∃ P Q, x.mem P ∧ y.mem Q ∧ W = embPair P Q
  sub := by
    rintro W (rfl | ⟨P, Q, hP, hQ, rfl⟩)
    · exact MemS.gamma
    · exact MemS.pair (x.sub hP) (y.sub hQ)
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨P, Q, hP, hQ, rfl⟩) (rfl | ⟨P', Q', hP', hQ', rfl⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr ⟨P', Q', hP', hQ', by
        rw [Set.inter_eq_right.mpr (embPair_subset_Gamma (memS_subset_gamma (x.sub hP
    '))
          (memS_subset_gamma (y.sub hQ'))))]⟩
    · exact Or.inr ⟨P, Q, hP, hQ, by
        rw [Set.inter_eq_left.mpr (embPair_subset_Gamma (memS_subset_gamma (x.sub hP))
          (memS_subset_gamma (y.sub hQ))))]⟩
    · exact Or.inr ⟨P ∩ P', Q ∩ Q', x.inter_mem hP hP', y.inter_mem hQ hQ', by rw [
    embPair_inter]⟩
  up_mem := by
    rintro W W' (rfl | ⟨P, Q, hP, hQ, rfl⟩) hW' hsub
    · exact Or.inl (Set.Subset.antisymm (memS_subset_gamma hW') hsub)
    · cases hW' with
```

```
      | gamma => exact Or.inl rfl
      | @zero X' hX' =>
        exfalso
        obtain ⟨t, ht⟩ := embPair_nonempty (memS_nonempty hD (x.sub hP)) (Q := Q)
        have hcons : t.1 = [] := by
          rcases ht with ⟨p', hp', -⟩ | ⟨q', hq', -⟩
          · simp [hp']
          · simp [hq']
        exact hcons (hsub ht).1
      | @pair P' Q' hP' hQ' =>
        obtain ⟨hPP, hQQ⟩ := embPair_subset.mp hsub
        exact Or.inr ⟨P', Q', x.up_mem hP hP' hPP, y.up_mem hQ hQ' hQQ, rfl⟩

theorem toS_fromS (s : (sumSys D hD).Element) : toS D hD (fromS D hD s) = s := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨X, hX, rfl, hs⟩ | ⟨P, Q, hP, hQ, rfl, hs⟩)
    · exact s.master_mem
    · exact (fromS_mem_embZero D hD hX).mp hs
    · exact (fromS_mem_embPair D hD hP hQ).mp hs
  · intro hW
    rcases s.sub hW with rfl | ⟨X, hX, rfl⟩ | ⟨V, hV, rfl⟩
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨X, hX, rfl, (fromS_mem_embZero D hD hX).mpr hW⟩)
    · obtain ⟨P, Q, hP, hQ, rfl⟩ := hV
      exact Or.inr (Or.inr ⟨P, Q, hP, hQ, rfl, (fromS_mem_embPair D hD hP hQ).mpr hW⟩)

def dsharpEquiv : (Dsharp D hD).Element ≃o (sumSys D hD).Element where
  toFun := toS D hD
  invFun := fromS D hD
  left_inv := fromS_toS D hD
  right_inv := toS_fromS D hD
  map_rel_iff' := by
    intro z z'
    constructor
    · intro h X hX
      cases z.sub hX with
      | gamma => exact z'.master_mem
      | @zero A hA =>
        exact (toS_mem_inj₀ D hD hA).mp (h _ (Or.inr (Or.inl ⟨A, hA, rfl, hX⟩)))
      | @pair P Q hP hQ =>
        exact (toS_mem_inj₁ D hD hP hQ).mp (h _ (Or.inr (Or.inr ⟨P, Q, hP, hQ, rfl, hX⟩
    )))
    · intro h W hW
      rcases hW with rfl | ⟨X, hX, rfl, hzX⟩ | ⟨P, Q, hP, hQ, rfl, hzPQ⟩
      · exact Or.inl rfl
      · exact Or.inr (Or.inl ⟨X, hX, rfl, h _ hzX⟩)
      · exact Or.inr (Or.inr ⟨P, Q, hP, hQ, rfl, h _ hzPQ⟩)

theorem dsharp_domain_equation :
    Dsharp D hD ≅? sum D (prod (Dsharp D hD) (Dsharp D hD)) hD (prod_dsharp_nonempty D
     hD) :=
  ⟨dsharpEquiv D hD⟩
```

```
theorem inSharp_le_iff {x x' : D.Element} : inSharp D hD x ≤ inSharp D hD x' ↔ x ≤ x'
     := by
  constructor
  · intro h X hX
    rcases h (embZero X) (Or.inr ⟨X, hX, rfl⟩) with h0 | ⟨X', hX', heq⟩
    · exact absurd h0 (embZero_ne_Gamma D hD X)
    · rw [← embZero_injective heq] at hX'; exact hX'
  · intro h W hW
    rcases hW with rfl | ⟨X, hX, rfl⟩
    · exact Or.inl rfl
    · exact Or.inr ⟨X, h _ hX, rfl⟩

theorem pairSharp_le_iff {x x' y y' : (Dsharp D hD).Element} :
    pairSharp D hD x y ≤ pairSharp D hD x' y' ↔ x ≤ x' ∧ y ≤ y' := by
  constructor
  · intro h
    refine ⟨fun P hP => ?_, fun Q hQ => ?_⟩
    · rcases h (embPair P (Gamma D)) (Or.inr ⟨P, Gamma D, hP, y.master_mem, rfl⟩) with
        h0 | ⟨P', Q', hP', hQ', heq⟩
      · exact absurd h0 (embPair_ne_Gamma D hD P (Gamma D))
      · obtain ⟨hPP, -⟩ := embPair_injective heq; rw [← hPP] at hP'; exact hP'
    · rcases h (embPair (Gamma D) Q) (Or.inr ⟨Gamma D, Q, x.master_mem, hQ, rfl⟩) with
        h0 | ⟨P', Q', hP', hQ', heq⟩
      · exact absurd h0 (embPair_ne_Gamma D hD (Gamma D) Q)
      · obtain ⟨-, hQQ⟩ := embPair_injective heq; rw [← hQQ] at hQ'; exact hQ'
  · rintro ⟨hx, hy⟩ W hW
    rcases hW with rfl | ⟨P, Q, hP, hQ, rfl⟩
    · exact Or.inl rfl
    · exact Or.inr ⟨P, Q, hx _ hP, hy _ hQ, rfl⟩

end Equation

end Example61
end

end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 6.18. With reference back to Exercise 3.16 discuss the construction of $\mathcal{D}^\infty$ as an initial algebra and as a solution to the domain equation

$$\mathcal{D}^\infty \cong \mathcal{D} \times \mathcal{D}^\infty.$$

(I do not know whether all solutions must be of the form $\mathcal{D}^\infty \times E$.)

3.7.21 Exercise 6.19 — strict sum and product

For the sake of uniformity restrict attention to systems $\mathcal{D}$ on sets $\Delta \subseteq \{0,1\}^*$, where $\Lambda \in \Delta$ and $\emptyset \notin \mathcal{D}$, and to the category of strict maps. Define sum and product by:

$$\mathcal{D}_0 + \mathcal{D}_1 = \{\{\Lambda\} \cup 0\Delta_0 \cup 1\Delta_1\} \cup \{0X \mid X \in \mathcal{D}_0\} \cup \{1Y \mid Y \in \mathcal{D}_1\},$$

$$\mathcal{D}_0 \times \mathcal{D}_1 = \{\{\Lambda\} \cup 0X \cup 1Y \mid X \in \mathcal{D}_0 \text{ and } Y \in \mathcal{D}_1\}.$$

Are these correct up to isomorphism? Now generate all constructs $T(X)$ formed by the constants (that is, $T(X) = \mathcal{D}$ for a fixed $\mathcal{D}$), by the identity ($T(X) = X$), and by sums and products ($T_0(X) + T_1(X)$, etc.). Show that these are all functors, continuous on maps, and monotone and continuous on domains.

Exercise_6_19.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Example_6_2

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap ExampleB Example44 Example62
open NeighborhoodSystem ApproximableMap Example62 ExampleB
section
namespace Exercise619
variable {D₀ D₁ : NeighborhoodSystem Str}

def sumTok (D₀ D₁ : NeighborhoodSystem Str)
    (h₀ : ∀ X, D₀.mem X → X.Nonempty) (h₁ : ∀ Y, D₁.mem Y → Y.Nonempty) :
    NeighborhoodSystem Str where
  mem W := W = sumTokMaster D₀ D₁ ∨ (∃ X, D₀.mem X ∧ W = embBit false X) ∨
    (∃ Y, D₁.mem Y ∧ W = embBit true Y)
  master := sumTokMaster D₀ D₁
  master_nonempty := ⟨[], nil_mem_sumTokMaster⟩
  master_mem := Or.inl rfl
  sub_master := by
    rintro W (rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩)
    · exact subset_rfl
    · exact embF_subset_sumTokMaster hX
    · exact embT_subset_sumTokMaster hY
  inter_mem := by
    have hne : ∀ W, (W = sumTokMaster D₀ D₁ ∨ (∃ X, D₀.mem X ∧ W = embBit false X) ∨
        (∃ Y, D₁.mem Y ∧ W = embBit true Y)) → (W : Set Str).Nonempty := by
      rintro W (rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩)
      · exact ⟨[], nil_mem_sumTokMaster⟩
      · exact embBit_nonempty (h₀ X hX)
      · exact embBit_nonempty (h₁ Y hY)
    rintro W W' Z hW hW' hZ hZsub
    rcases hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
      · rw [Set.inter_self]; exact Or.inl rfl
      · rw [sumTokMaster_inter_embF hX']; exact Or.inr (Or.inl ⟨X', hX', rfl⟩)
      · rw [sumTokMaster_inter_embT hY']; exact Or.inr (Or.inr ⟨Y', hY', rfl⟩)
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
      · rw [Set.inter_comm, sumTokMaster_inter_embF hX]; exact Or.inr (Or.inl ⟨X, hX,
    rfl⟩)
      · rw [embBit_inter] at hZsub ⊢
        rcases hZ with rfl | ⟨Z₀, hZ₀, rfl⟩ | ⟨Z₁, hZ₁, rfl⟩
        · exact absurd (hZsub nil_mem_sumTokMaster) nil_not_mem_embBit
        · exact Or.inr (Or.inl ⟨X ∩ X', D₀.inter_mem hX hX' hZ₀ (embBit_subset.mp hZsub)
    , rfl⟩)
        · obtain ⟨b, hb⟩ := h₁ Z₁ hZ₁
          obtain ⟨w', he, -⟩ := hZsub (⟨b, rfl, hb⟩ : (true :: b) ∈ embBit true Z₁)
```

```
          simp only [List.cons.injEq] at he; exact absurd he.1 (by decide)
      · rw [embBit_inter_ne (show (false : Bool) = true by decide)] at hZsub ⊢
        obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
      · rw [Set.inter_comm, sumTokMaster_inter_embT hY]; exact Or.inr (Or.inr ⟨Y, hY,
    rfl⟩)
      · rw [embBit_inter_ne (show (true : Bool) = false by decide)] at hZsub ⊢
        obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
      · rw [embBit_inter] at hZsub ⊢
        rcases hZ with rfl | ⟨Z₀, hZ₀, rfl⟩ | ⟨Z₁, hZ₁, rfl⟩
        · exact absurd (hZsub nil_mem_sumTokMaster) nil_not_mem_embBit
        · obtain ⟨a, ha⟩ := h₀ Z₀ hZ₀
          obtain ⟨w', he, -⟩ := hZsub (⟨a, rfl, ha⟩ : (false :: a) ∈ embBit false Z₀)
          simp only [List.cons.injEq] at he; exact absurd he.1 (by decide)
        · exact Or.inr (Or.inr ⟨Y ∩ Y', D₁.inter_mem hY hY' hZ₁ (embBit_subset.mp hZsub)
    , rfl⟩)

end Exercise619
end

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

theorem sumTok_mem_embF {X : Set Str} (hX : D₀.mem X) :
    (sumTok D₀ D₁ h₀ h₁).mem (embBit false X) := Or.inr (Or.inl ⟨X, hX, rfl⟩)

theorem sumTok_mem_embF_inv {W : Set Str} (h : (sumTok D₀ D₁ h₀ h₁).mem (embBit false W
    )) :
    D₀.mem W := by
  rcases h with h0 | ⟨X, hX, heq⟩ | ⟨Y, hY, heq⟩
  · exact absurd (h0.symm ▸ nil_mem_sumTokMaster) nil_not_mem_embBit
  · rw [embBit_injective heq]; exact hX
  · exact absurd heq.symm (embBit_ne (show (true : Bool) = false by decide) (h₁ Y hY))

theorem sumTok_mem_embT {Y : Set Str} (hY : D₁.mem Y) :
    (sumTok D₀ D₁ h₀ h₁).mem (embBit true Y) := Or.inr (Or.inr ⟨Y, hY, rfl⟩)

theorem sumTok_mem_embT_inv {W : Set Str} (h : (sumTok D₀ D₁ h₀ h₁).mem (embBit true W)
    ) :
    D₁.mem W := by
  rcases h with h0 | ⟨X, hX, heq⟩ | ⟨Y, hY, heq⟩
  · exact absurd (h0.symm ▸ nil_mem_sumTokMaster) nil_not_mem_embBit
  · exact absurd heq.symm (embBit_ne (show (false : Bool) = true by decide) (h₀ X hX))
  · rw [embBit_injective heq]; exact hY

theorem sumTok_mem_nonempty {W : Set Str} (h : (sumTok D₀ D₁ h₀ h₁).mem W) : W.Nonempty
     := by
  rcases h with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
  · exact ⟨[], nil_mem_sumTokMaster⟩
  · exact embBit_nonempty (h₀ X hX)
  · exact embBit_nonempty (h₁ Y hY)
```

```
theorem sum_mem_inj₀_inv {X : Set Str} (h : (sum D₀ D₁ h₀ h₁).mem (inj₀ X)) : D₀.mem X
    := by
  rcases h with h0 | ⟨X', hX', heq⟩ | ⟨Y', hY', heq⟩
  · exact absurd (h0 ▶ none_mem_sumMaster) none_mem_inj₀
  · rw [inj₀_injective heq]; exact hX'
  · obtain ⟨b, hb⟩ := h₁ Y' hY'
    exact absurd (heq ▶ ir_mem_inj₁.mpr hb) ir_mem_inj₀

theorem sum_mem_inj₁_inv {Y : Set Str} (h : (sum D₀ D₁ h₀ h₁).mem (inj₁ Y)) : D₁.mem Y
    := by
  rcases h with h0 | ⟨X', hX', heq⟩ | ⟨Y', hY', heq⟩
  · exact absurd (h0 ▶ none_mem_sumMaster) none_mem_inj₁
  · obtain ⟨a, ha⟩ := h₀ X' hX'
    exact absurd (heq ▶ il_mem_inj₀.mpr ha) il_mem_inj₁
  · rw [inj₁_injective heq]; exact hY'

theorem sum_mem_nonempty {W : Set (Option (Str ? Str))} (h : (sum D₀ D₁ h₀ h₁).mem W) :
    W.Nonempty := by
  rcases h with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
  · exact ⟨none, none_mem_sumMaster⟩
  · exact inj₀_nonempty (h₀ X hX)
  · exact inj₁_nonempty (h₁ Y hY)

def toSum (x : (sumTok D₀ D₁ h₀ h₁).Element) : (sum D₀ D₁ h₀ h₁).Element where
  mem W := W = sumMaster D₀ D₁
    ∨ (∃ X, D₀.mem X ∧ W = inj₀ X ∧ x.mem (embBit false X))
    ∨ (∃ Y, D₁.mem Y ∧ W = inj₁ Y ∧ x.mem (embBit true Y))
  sub := by
    rintro W (rfl | ⟨X, hX, rfl, -⟩ | ⟨Y, hY, rfl, -⟩)
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨X, hX, rfl⟩)
    · exact Or.inr (Or.inr ⟨Y, hY, rfl⟩)
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hzX⟩ | ⟨Y, hY, rfl, hzY⟩)
      (rfl | ⟨X', hX', rfl, hzX'⟩ | ⟨Y', hY', rfl, hzY'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr (Or.inl ⟨X', hX', by rw [sumMaster_inter_inj₀ hX'], hzX'⟩)
    · exact Or.inr (Or.inr ⟨Y', hY', by rw [sumMaster_inter_inj₁ hY'], hzY'⟩)
    · exact Or.inr (Or.inl ⟨X, hX, by rw [Set.inter_comm, sumMaster_inter_inj₀ hX], hzX⟩
    )
    · refine Or.inr (Or.inl ⟨X ∩ X', ?_, by rw [inj₀_inter], ?_⟩)
      · have hz := x.inter_mem hzX hzX'; rw [embBit_inter] at hz; exact
    sumTok_mem_embF_inv (x.sub hz)
      · have hz := x.inter_mem hzX hzX'; rwa [embBit_inter] at hz
    · exfalso
      have hz := x.inter_mem hzX hzY'
      rw [embBit_inter_ne (show (false : Bool) = true by decide)] at hz
      obtain ⟨t, ht⟩ := sumTok_mem_nonempty (x.sub hz); exact Set.notMem_empty t ht
    · exact Or.inr (Or.inr ⟨Y, hY, by rw [Set.inter_comm, sumMaster_inter_inj₁ hY], hzY⟩
    )
    · exfalso
      have hz := x.inter_mem hzY hzX'
      rw [embBit_inter_ne (show (true : Bool) = false by decide)] at hz
      obtain ⟨t, ht⟩ := sumTok_mem_nonempty (x.sub hz); exact Set.notMem_empty t ht
    · refine Or.inr (Or.inr ⟨Y ∩ Y', ?_, by rw [inj₁_inter], ?_⟩)
```

```
      · have hz := x.inter_mem hzY hzY'; rw [embBit_inter] at hz; exact
    sumTok_mem_embT_inv (x.sub hz)
      · have hz := x.inter_mem hzY hzY'; rwa [embBit_inter] at hz
  up_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hzX⟩ | ⟨Y, hY, rfl, hzY⟩) hW' hsub
    · exact Or.inl (eq_sumMaster_of_subset hW' hsub)
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
      · exact Or.inl rfl
      · refine Or.inr (Or.inl ⟨X', hX', rfl, ?_⟩)
        exact x.up_mem hzX (sumTok_mem_embF hX') (embBit_subset.mpr (inj₀_subset_inj₀.
    mp hsub))
      · exfalso
        obtain ⟨a, ha⟩ := h₀ X hX
        exact absurd (hsub (il_mem_inj₀.mpr ha)) il_mem_inj₁
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
      · exact Or.inl rfl
      · exfalso
        obtain ⟨b, hb⟩ := h₁ Y hY
        exact absurd (hsub (ir_mem_inj₁.mpr hb)) ir_mem_inj₀
      · refine Or.inr (Or.inr ⟨Y', hY', rfl, ?_⟩)
        exact x.up_mem hzY (sumTok_mem_embT hY') (embBit_subset.mpr (inj₁_subset_inj₁.
    mp hsub))

@[simp] theorem toSum_mem_inj₀ {x : (sumTok D₀ D₁ h₀ h₁).Element} {X : Set Str} (hX : D₀
    .mem X) :
    (toSum x).mem (inj₀ X) ↔ x.mem (embBit false X) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hz⟩ | ⟨Y', hY', heq, hz⟩)
    · exact absurd (h0 ▶ none_mem_sumMaster) none_mem_inj₀
    · rwa [inj₀_injective heq]
    · obtain ⟨a, ha⟩ := h₀ X hX
      exact absurd (heq ▶ il_mem_inj₀.mpr ha) il_mem_inj₁
  · intro hz; exact Or.inr (Or.inl ⟨X, hX, rfl, hz⟩)

@[simp] theorem toSum_mem_inj₁ {x : (sumTok D₀ D₁ h₀ h₁).Element} {Y : Set Str} (hY : D₁
    .mem Y) :
    (toSum x).mem (inj₁ Y) ↔ x.mem (embBit true Y) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hz⟩ | ⟨Y', hY', heq, hz⟩)
    · exact absurd (h0 ▶ none_mem_sumMaster) none_mem_inj₁
    · obtain ⟨a, ha⟩ := h₀ X' hX'
      exact absurd (heq ▶ il_mem_inj₀.mpr ha) il_mem_inj₁
    · rwa [inj₁_injective heq]
  · intro hz; exact Or.inr (Or.inr ⟨Y, hY, rfl, hz⟩)

def fromSum (s : (sum D₀ D₁ h₀ h₁).Element) : (sumTok D₀ D₁ h₀ h₁).Element where
  mem W := W = sumTokMaster D₀ D₁
    ∨ (∃ X, D₀.mem X ∧ W = embBit false X ∧ s.mem (inj₀ X))
    ∨ (∃ Y, D₁.mem Y ∧ W = embBit true Y ∧ s.mem (inj₁ Y))
  sub := by
    rintro W (rfl | ⟨X, hX, rfl, -⟩ | ⟨Y, hY, rfl, -⟩)
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨X, hX, rfl⟩)
    · exact Or.inr (Or.inr ⟨Y, hY, rfl⟩)
  master_mem := Or.inl rfl
  inter_mem := by
```

```
    rintro W W' (rfl | ⟨X, hX, rfl, hsX⟩ | ⟨Y, hY, rfl, hsY⟩)
      (rfl | ⟨X', hX', rfl, hsX'⟩ | ⟨Y', hY', rfl, hsY'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr (Or.inl ⟨X', hX', by rw [sumTokMaster_inter_embF hX'], hsX'⟩)
    · exact Or.inr (Or.inr ⟨Y', hY', by rw [sumTokMaster_inter_embT hY'], hsY'⟩)
    · exact Or.inr (Or.inl ⟨X, hX, by rw [Set.inter_comm, sumTokMaster_inter_embF hX],
    hsX⟩)
    · refine Or.inr (Or.inl ⟨X ∩ X', ?_, by rw [embBit_inter], ?_⟩)
      · have hs := s.inter_mem hsX hsX'; rw [inj₀_inter] at hs
        exact sum_mem_inj₀_inv (s.sub hs)
      · have hs := s.inter_mem hsX hsX'; rwa [inj₀_inter] at hs
    · exfalso
      have hs := s.inter_mem hsX hsY'; rw [inj₀_inter_inj₁] at hs
      obtain ⟨t, ht⟩ := sum_mem_nonempty (s.sub hs); exact Set.notMem_empty t ht
    · exact Or.inr (Or.inr ⟨Y, hY, by rw [Set.inter_comm, sumTokMaster_inter_embT hY],
    hsY⟩)
    · exfalso
      have hs := s.inter_mem hsY hsX'; rw [Set.inter_comm, inj₀_inter_inj₁] at hs
      obtain ⟨t, ht⟩ := sum_mem_nonempty (s.sub hs); exact Set.notMem_empty t ht
    · refine Or.inr (Or.inr ⟨Y ∩ Y', ?_, by rw [embBit_inter], ?_⟩)
      · have hs := s.inter_mem hsY hsY'; rw [inj₁_inter] at hs
        exact sum_mem_inj₁_inv (s.sub hs)
      · have hs := s.inter_mem hsY hsY'; rwa [inj₁_inter] at hs
  up_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hsX⟩ | ⟨Y, hY, rfl, hsY⟩) hW' hsub
    · exact Or.inl (Set.Subset.antisymm ((sumTok D₀ D₁ h₀ h₁).sub_master hW') hsub)
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
      · exact Or.inl rfl
      · refine Or.inr (Or.inl ⟨X', hX', rfl, ?_⟩)
        exact s.up_mem hsX (Or.inr (Or.inl ⟨X', hX', rfl⟩))
          (inj₀_subset_inj₀.mpr (embBit_subset.mp hsub))
      · exfalso
        obtain ⟨a, ha⟩ := h₀ X hX
        obtain ⟨w', he, -⟩ := hsub (⟨a, rfl, ha⟩ : (false :: a) ∈ embBit false X)
        rw [List.cons.injEq] at he; exact absurd he.1 (by decide)
    · rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
      · exact Or.inl rfl
      · exfalso
        obtain ⟨b, hb⟩ := h₁ Y hY
        obtain ⟨w', he, -⟩ := hsub (⟨b, rfl, hb⟩ : (true :: b) ∈ embBit true Y)
        rw [List.cons.injEq] at he; exact absurd he.1 (by decide)
      · refine Or.inr (Or.inr ⟨Y', hY', rfl, ?_⟩)
        exact s.up_mem hsY (Or.inr (Or.inr ⟨Y', hY', rfl⟩))
          (inj₁_subset_inj₁.mpr (embBit_subset.mp hsub))

@[simp] theorem fromSum_mem_embF {s : (sum D₀ D₁ h₀ h₁).Element} {X : Set Str} (hX : D₀.
    mem X) :
    (fromSum s).mem (embBit false X) ↔ s.mem (inj₀ X) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hs⟩ | ⟨Y', hY', heq, hs⟩)
    · exact absurd h0 embF_ne_sumTokMaster
    · rwa [embBit_injective heq]
    · exact absurd heq (embBit_ne (show (false : Bool) = true by decide) (h₀ X hX))
  · intro hs; exact Or.inr (Or.inl ⟨X, hX, rfl, hs⟩)

@[simp] theorem fromSum_mem_embT {s : (sum D₀ D₁ h₀ h₁).Element} {Y : Set Str} (hY : D₁.
```

```
    mem Y) :
    (fromSum s).mem (embBit true Y) ↔ s.mem (inj₁ Y) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hs⟩ | ⟨Y', hY', heq, hs⟩)
    · exact absurd h0 embT_ne_sumTokMaster
    · exact absurd heq.symm (embBit_ne (show (false : Bool) = true by decide) (h₀ X' hX
    '))
    · rwa [embBit_injective heq]
  · intro hs; exact Or.inr (Or.inr ⟨Y, hY, rfl, hs⟩)

theorem fromSum_toSum (x : (sumTok D₀ D₁ h₀ h₁).Element) : fromSum (toSum x) = x := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨X, hX, rfl, hs⟩ | ⟨Y, hY, rfl, hs⟩)
    · exact x.master_mem
    · exact (toSum_mem_inj₀ hX).mp hs
    · exact (toSum_mem_inj₁ hY).mp hs
  · intro hW
    rcases x.sub hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨X, hX, rfl, (toSum_mem_inj₀ hX).mpr hW⟩)
    · exact Or.inr (Or.inr ⟨Y, hY, rfl, (toSum_mem_inj₁ hY).mpr hW⟩)

def prodTokNbhd (X Y : Set Str) : Set Str := insert [] (embBit false X ∪ embBit true Y
    )

@[simp] theorem mem_prodTokNbhd_nil {X Y : Set Str} : ([] : Str) ∈ prodTokNbhd X Y :=
  Set.mem_insert _ _

@[simp] theorem mem_prodTokNbhd_false {X Y : Set Str} {w' : Str} :
    (false :: w') ∈ prodTokNbhd X Y ↔ w' ∈ X := by
  simp only [prodTokNbhd, Set.mem_insert_iff, Set.mem_union, mem_embBit]
  constructor
  · rintro (h | ⟨u, hu, hX⟩ | ⟨u, hu, hY⟩)
    · exact absurd h (by simp)
    · rw [List.cons.injEq] at hu; rw [hu.2]; exact hX
    · rw [List.cons.injEq] at hu; exact absurd hu.1 (by decide)
  · intro h; exact Or.inr (Or.inl ⟨w', rfl, h⟩)

@[simp] theorem mem_prodTokNbhd_true {X Y : Set Str} {w' : Str} :
    (true :: w') ∈ prodTokNbhd X Y ↔ w' ∈ Y := by
  simp only [prodTokNbhd, Set.mem_insert_iff, Set.mem_union, mem_embBit]
  constructor
  · rintro (h | ⟨u, hu, hX⟩ | ⟨u, hu, hY⟩)
    · exact absurd h (by simp)
    · rw [List.cons.injEq] at hu; exact absurd hu.1 (by decide)
    · rw [List.cons.injEq] at hu; rw [hu.2]; exact hY
  · intro h; exact Or.inr (Or.inr ⟨w', rfl, h⟩)

theorem prodTokNbhd_inter (X X' Y Y' : Set Str) :
    prodTokNbhd X Y ∩ prodTokNbhd X' Y' = prodTokNbhd (X ∩ X') (Y ∩ Y') := by
  ext w
  cases w with
  | nil => simp [Set.mem_inter_iff]
  | cons b w' => cases b <;> simp [Set.mem_inter_iff]
```

```
theorem prodTokNbhd_subset_iff {X X' Y Y' : Set Str} :
    prodTokNbhd X Y ⊆ prodTokNbhd X' Y' ↔ X ⊆ X' ∧ Y ⊆ Y' := by
  constructor
  · intro h
    refine ⟨fun a ha => ?_, fun b hb => ?_⟩
    · exact mem_prodTokNbhd_false.mp (h (mem_prodTokNbhd_false.mpr ha))
    · exact mem_prodTokNbhd_true.mp (h (mem_prodTokNbhd_true.mpr hb))
  · rintro ⟨hX, hY⟩ w hw
    cases w with
    | nil => exact mem_prodTokNbhd_nil
    | cons b w' =>
      cases b with
      | false => exact mem_prodTokNbhd_false.mpr (hX (mem_prodTokNbhd_false.mp hw))
      | true => exact mem_prodTokNbhd_true.mpr (hY (mem_prodTokNbhd_true.mp hw))

def prodTok (D₀ D₁ : NeighborhoodSystem Str) : NeighborhoodSystem Str where
  mem W := ∃ X Y, D₀.mem X ∧ D₁.mem Y ∧ W = prodTokNbhd X Y
  master := prodTokNbhd D₀.master D₁.master
  master_nonempty := ⟨[], mem_prodTokNbhd_nil⟩
  master_mem := ⟨D₀.master, D₁.master, D₀.master_mem, D₁.master_mem, rfl⟩
  inter_mem := by
    rintro W W' Z ⟨X, Y, hX, hY, rfl⟩ ⟨X', Y', hX', hY', rfl⟩ ⟨Z₀, Z₁, hZ₀, hZ₁, rfl⟩
    hsub
    rw [prodTokNbhd_inter] at hsub ⊢
    obtain ⟨hsub₀, hsub₁⟩ := prodTokNbhd_subset_iff.mp hsub
    exact ⟨X ∩ X', Y ∩ Y', D₀.inter_mem hX hX' hZ₀ hsub₀, D₁.inter_mem hY hY' hZ₁ hsub₁,
     rfl⟩
  sub_master := by
    rintro W ⟨X, Y, hX, hY, rfl⟩
    exact prodTokNbhd_subset_iff.mpr ⟨D₀.sub_master hX, D₁.sub_master hY⟩

theorem prodTokNbhd_injective {X X' Y Y' : Set Str} (h : prodTokNbhd X Y = prodTokNbhd
     X' Y') :
    X = X' ∧ Y = Y' :=
  ⟨Set.Subset.antisymm (prodTokNbhd_subset_iff.mp h.subset).1
      (prodTokNbhd_subset_iff.mp h.symm.subset).1,
   Set.Subset.antisymm (prodTokNbhd_subset_iff.mp h.subset).2
      (prodTokNbhd_subset_iff.mp h.symm.subset).2⟩

@[simp] theorem prodTok_mem_iff {W : Set Str} :
    (prodTok D₀ D₁).mem W ↔ ∃ X Y, D₀.mem X ∧ D₁.mem Y ∧ W = prodTokNbhd X Y := Iff.rfl

@[simp] theorem prodTok_master : (prodTok D₀ D₁).master = prodTokNbhd D₀.master D₁.
    master := rfl

theorem prodTok_mem_prodTokNbhd {X Y : Set Str} (hX : D₀.mem X) (hY : D₁.mem Y) :
    (prodTok D₀ D₁).mem (prodTokNbhd X Y) := ⟨X, Y, hX, hY, rfl⟩

def fstTok (z : (prodTok D₀ D₁).Element) : D₀.Element where
  mem X := D₀.mem X ∧ z.mem (prodTokNbhd X D₁.master)
  sub h := h.1
  master_mem := ⟨D₀.master_mem, z.master_mem⟩
  inter_mem := by
    rintro X X' ⟨_, hzX⟩ ⟨_, hzX'⟩
    have hz := z.inter_mem hzX hzX'
```

```
    rw [prodTokNbhd_inter, Set.inter_self] at hz
    obtain ⟨A, B, hA, _, heq⟩ := z.sub hz
    obtain ⟨rfl, rfl⟩ := prodTokNbhd_injective heq
    exact ⟨hA, hz⟩
  up_mem := by
    rintro X X' ⟨_, hzX⟩ hX' hXX'
    exact ⟨hX', z.up_mem hzX (prodTok_mem_prodTokNbhd hX' D₁.master_mem)
      (prodTokNbhd_subset_iff.mpr ⟨hXX', subset_rfl⟩)⟩

@[simp] theorem mem_fstTok {z : (prodTok D₀ D₁).Element} {X : Set Str} :
    (fstTok z).mem X ↔ D₀.mem X ∧ z.mem (prodTokNbhd X D₁.master) := Iff.rfl

def sndTok (z : (prodTok D₀ D₁).Element) : D₁.Element where
  mem Y := D₁.mem Y ∧ z.mem (prodTokNbhd D₀.master Y)
  sub h := h.1
  master_mem := ⟨D₁.master_mem, z.master_mem⟩
  inter_mem := by
    rintro Y Y' ⟨_, hzY⟩ ⟨_, hzY'⟩
    have hz := z.inter_mem hzY hzY'
    rw [prodTokNbhd_inter, Set.inter_self] at hz
    obtain ⟨A, B, _, hB, heq⟩ := z.sub hz
    obtain ⟨rfl, rfl⟩ := prodTokNbhd_injective heq
    exact ⟨hB, hz⟩
  up_mem := by
    rintro Y Y' ⟨_, hzY⟩ hY' hYY'
    exact ⟨hY', z.up_mem hzY (prodTok_mem_prodTokNbhd D₀.master_mem hY')
      (prodTokNbhd_subset_iff.mpr ⟨subset_rfl, hYY'⟩)⟩

@[simp] theorem mem_sndTok {z : (prodTok D₀ D₁).Element} {Y : Set Str} :
    (sndTok z).mem Y ↔ D₁.mem Y ∧ z.mem (prodTokNbhd D₀.master Y) := Iff.rfl

def pairTok (x : D₀.Element) (y : D₁.Element) : (prodTok D₀ D₁).Element where
  mem W := ∃ X Y, x.mem X ∧ y.mem Y ∧ W = prodTokNbhd X Y
  sub := by rintro W ⟨X, Y, hX, hY, rfl⟩; exact prodTok_mem_prodTokNbhd (x.sub hX) (y.
    sub hY)
  master_mem := ⟨D₀.master, D₁.master, x.master_mem, y.master_mem, rfl⟩
  inter_mem := by
    rintro W W' ⟨X, Y, hX, hY, rfl⟩ ⟨X', Y', hX', hY', rfl⟩
    exact ⟨X ∩ X', Y ∩ Y', x.inter_mem hX hX', y.inter_mem hY hY', prodTokNbhd_inter X
    X' Y Y'⟩
  up_mem := by
    rintro W W' ⟨X, Y, hX, hY, rfl⟩ ⟨X', Y', hX', hY', rfl⟩ hsub
    obtain ⟨hXX', hYY'⟩ := prodTokNbhd_subset_iff.mp hsub

    exact ⟨X', Y', x.up_mem hX hX' hXX', y.up_mem hY hY' hYY', rfl⟩

theorem mem_pairTok_prodTokNbhd {x : D₀.Element} {y : D₁.Element} {X Y : Set Str} :
    (pairTok x y).mem (prodTokNbhd X Y) ↔ x.mem X ∧ y.mem Y := by
  constructor
  · rintro ⟨X', Y', hX', hY', heq⟩
    obtain ⟨rfl, rfl⟩ := prodTokNbhd_injective heq
    exact ⟨hX', hY'⟩
  · rintro ⟨hx, hy⟩; exact ⟨X, Y, hx, hy, rfl⟩

@[simp] theorem fstTok_pairTok (x : D₀.Element) (y : D₁.Element) : fstTok (pairTok x y)
     = x := by
```

```
  apply NeighborhoodSystem.Element.ext
  intro X
  constructor
  · rintro ⟨hX, hmem⟩; exact (mem_pairTok_prodTokNbhd.mp hmem).1
  · intro hX; exact ⟨x.sub hX, mem_pairTok_prodTokNbhd.mpr ⟨hX, y.master_mem⟩⟩

theorem prodTok_mem_split {z : (prodTok D₀ D₁).Element} {X Y : Set Str}
    (hX : D₀.mem X) (hY : D₁.mem Y) :
    z.mem (prodTokNbhd X Y) ↔
      z.mem (prodTokNbhd X D₁.master) ∧ z.mem (prodTokNbhd D₀.master Y) := by
  constructor
  · intro h
    refine ⟨z.up_mem h (prodTok_mem_prodTokNbhd hX D₁.master_mem) ?_,
            z.up_mem h (prodTok_mem_prodTokNbhd D₀.master_mem hY) ?_⟩
    · exact prodTokNbhd_subset_iff.mpr ⟨subset_rfl, D₁.sub_master hY⟩
    · exact prodTokNbhd_subset_iff.mpr ⟨D₀.sub_master hX, subset_rfl⟩
  · rintro ⟨h1, h2⟩
    have := z.inter_mem h1 h2
    rwa [prodTokNbhd_inter, Set.inter_eq_left.mpr (D₀.sub_master hX),
      Set.inter_eq_right.mpr (D₁.sub_master hY)] at this

theorem pairTok_fstTok_sndTok (z : (prodTok D₀ D₁).Element) : pairTok (fstTok z) (
    sndTok z) = z := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro ⟨X, Y, ⟨hX, hzX⟩, ⟨hY, hzY⟩, rfl⟩
    exact (prodTok_mem_split hX hY).mpr ⟨hzX, hzY⟩
  · intro hW
    obtain ⟨X, Y, hX, hY, rfl⟩ := z.sub hW
    obtain ⟨h1, h2⟩ := (prodTok_mem_split hX hY).mp hW
    exact ⟨X, Y, ⟨hX, h1⟩, ⟨hY, h2⟩, rfl⟩

@[simp] theorem sndTok_pairTok (x : D₀.Element) (y : D₁.Element) : sndTok (pairTok x y)
     = y := by
  apply NeighborhoodSystem.Element.ext
  intro Y
  constructor
  · rintro ⟨hY, hmem⟩; exact (mem_pairTok_prodTokNbhd.mp hmem).2
  · intro hY; exact ⟨y.sub hY, mem_pairTok_prodTokNbhd.mpr ⟨x.master_mem, hY⟩⟩

def prodTokEquiv : (prodTok D₀ D₁).Element ≃o D₀.Element × D₁.Element where
  toFun z := (fstTok z, sndTok z)
  invFun p := pairTok p.1 p.2
  left_inv z := pairTok_fstTok_sndTok z
  right_inv p := by simp
  map_rel_iff' := by
    intro z z'
    constructor
    · rintro ⟨h1, h2⟩ W hW
      obtain ⟨X, Y, hX, hY, rfl⟩ := z.sub hW
      obtain ⟨ha, hb⟩ := (prodTok_mem_split hX hY).mp hW
      have hX' : (fstTok z').mem X := h1 X ⟨hX, ha⟩
      have hY' : (sndTok z').mem Y := h2 Y ⟨hY, hb⟩
      exact (prodTok_mem_split hX hY).mpr ⟨hX'.2, hY'.2⟩
    · intro h
```

```
      exact ⟨fun X ⟨hX, hzX⟩ => ⟨hX, h _ hzX⟩, fun Y ⟨hY, hzY⟩ => ⟨hY, h _ hzY⟩⟩

theorem toSum_fromSum (s : (sum D₀ D₁ h₀ h₁).Element) : toSum (fromSum s) = s := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨X, hX, rfl, hs⟩ | ⟨Y, hY, rfl, hs⟩)
    · exact s.master_mem
    · exact (fromSum_mem_embF hX).mp hs
    · exact (fromSum_mem_embT hY).mp hs
  · intro hW
    rcases s.sub hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨X, hX, rfl, (fromSum_mem_embF hX).mpr hW⟩)
    · exact Or.inr (Or.inr ⟨Y, hY, rfl, (fromSum_mem_embT hY).mpr hW⟩)

def sumTokEquiv : (sumTok D₀ D₁ h₀ h₁).Element ≃o (sum D₀ D₁ h₀ h₁).Element where
  toFun := toSum
  invFun := fromSum
  left_inv := fromSum_toSum
  right_inv := toSum_fromSum
  map_rel_iff' := by
    intro x x'
    constructor
    · intro h X hX
      rcases x.sub hX with rfl | ⟨A, hA, rfl⟩ | ⟨A, hA, rfl⟩
      · exact x'.master_mem
      · exact (toSum_mem_inj₀ hA).mp (h _ (Or.inr (Or.inl ⟨A, hA, rfl, hX⟩)))
      · exact (toSum_mem_inj₁ hA).mp (h _ (Or.inr (Or.inr ⟨A, hA, rfl, hX⟩)))
    · intro h W hW
      rcases hW with rfl | ⟨X, hX, rfl, hzX⟩ | ⟨Y, hY, rfl, hzY⟩
      · exact Or.inl rfl
      · exact Or.inr (Or.inl ⟨X, hX, rfl, h _ hzX⟩)
      · exact Or.inr (Or.inr ⟨Y, hY, rfl, h _ hzY⟩)

theorem prodTokNbhd_master_eq : prodTokNbhd D₀.master D₁.master = sumTokMaster D₀ D₁ :=
    rfl

theorem prodTok_iso_prod : prodTok D₀ D₁ ≅? prod D₀ D₁ :=
  ⟨prodTokEquiv.trans (prodEquiv D₀ D₁).symm⟩

theorem prodTok_nonempty : ∀ W, (prodTok D₀ D₁).mem W → W.Nonempty := by
  rintro W ⟨X, Y, _, _, rfl⟩; exact ⟨[], mem_prodTokNbhd_nil⟩

theorem sumTok_iso_sum : sumTok D₀ D₁ h₀ h₁ ≅? sum D₀ D₁ h₀ h₁ := ⟨sumTokEquiv⟩

end Exercise619
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise619
section
set_option linter.unusedVariables false

theorem example_619 : And
  (∀ {D₀ D₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
```

```
  NeighbourhoodSystems.ExampleB.Str},
  @DomainTheory.NeighbourhoodSystems.Isomorphic DomainTheory.NeighbourhoodSystems.
  ExampleB.Str
    (Sum DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.ExampleB.Str)
    (DomainTheory.NeighbourhoodSystems.Exercise619.prodTok D₀ D₁)
    (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems.
  ExampleB.Str
      DomainTheory.NeighbourhoodSystems.ExampleB.Str D₀ D₁))
(∀ {D₀ D₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str}
  {h₀ :
    ∀ (X : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str D₀ X →
        @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str X}
  {h₁ :
    ∀ (Y : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str D₁ Y →
        @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str Y},
  @DomainTheory.NeighbourhoodSystems.Isomorphic DomainTheory.NeighbourhoodSystems.
  ExampleB.Str
    (Option (Sum DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.ExampleB.Str))
    (DomainTheory.NeighbourhoodSystems.Exercise619.sumTok D₀ D₁ h₀ h₁)
    (@DomainTheory.NeighbourhoodSystems.sum DomainTheory.NeighbourhoodSystems.
  ExampleB.Str
      DomainTheory.NeighbourhoodSystems.ExampleB.Str D₀ D₁ h₀ h₁)) :=
@And.intro
(∀ {D₀ D₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str},
  @DomainTheory.NeighbourhoodSystems.Isomorphic DomainTheory.NeighbourhoodSystems.
  ExampleB.Str
    (Sum DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.ExampleB.Str)
    (DomainTheory.NeighbourhoodSystems.Exercise619.prodTok D₀ D₁)
    (@DomainTheory.NeighbourhoodSystems.prod DomainTheory.NeighbourhoodSystems.
  ExampleB.Str
      DomainTheory.NeighbourhoodSystems.ExampleB.Str D₀ D₁))
(∀ {D₀ D₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str}
  {h₀ :
    ∀ (X : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str D₀ X →
        @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str X}
  {h₁ :
    ∀ (Y : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str D₁ Y →
        @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str Y},
  @DomainTheory.NeighbourhoodSystems.Isomorphic DomainTheory.NeighbourhoodSystems.
  ExampleB.Str
    (Option (Sum DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.ExampleB.Str))
```

```
      (DomainTheory.NeighbourhoodSystems.Exercise619.sumTok D₀ D₁ h₀ h₁)
      (@DomainTheory.NeighbourhoodSystems.sum DomainTheory.NeighbourhoodSystems.
    ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.Str D₀ D₁ h₀ h₁))
  @DomainTheory.NeighbourhoodSystems.Exercise619.prodTok_iso_prod
  @DomainTheory.NeighbourhoodSystems.Exercise619.sumTok_iso_sum
end

end DomainTheory.NeighbourhoodSystems.Exercise619
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap Example62 ExampleB

namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

theorem sumTok_mem_master : (sumTok D₀ D₁ h₀ h₁).mem (sumTokMaster D₀ D₁) := Or.inl rfl

theorem sumTok_nonempty : ∀ W, (sumTok D₀ D₁ h₀ h₁).mem W → W.Nonempty :=
  fun _ h => sumTok_mem_nonempty h

end Exercise619
end

section
open NeighborhoodSystem

namespace Exercise629

universe u v

variable {ι : Type u} {α : ι → Type v}

def iprodNbhd (X : ∀ i, Set (α i)) : Set (Σ i, α i) := {p | p.2 ∈ X p.1}

@[simp] theorem mem_iprodNbhd {X : ∀ i, Set (α i)} {i : ι} {a : α i} :
    (⟨i, a⟩ : Σ i, α i) ∈ iprodNbhd X ↔ a ∈ X i := Iff.rfl

end Exercise629
end

section
open NeighborhoodSystem

namespace Exercise629

universe u v

variable {ι : Type u} {α : ι → Type v}

variable {D : ∀ i, NeighborhoodSystem (α i)}

def FinSupp (D : ∀ i, NeighborhoodSystem (α i)) (X : ∀ i, Set (α i)) : Prop :=
```

```
  ∃ l : List ι, ∀ i, i ∈ l → X i = (D i).master

theorem FinSupp.inter {X X' : ∀ i, Set (α i)}
    (hX : FinSupp D X) (hX' : FinSupp D X') : FinSupp D (fun i => X i ∩ X' i) := by
  obtain ⟨l, hl⟩ := hX; obtain ⟨l', hl'⟩ := hX'

  refine ⟨l ++ l', fun i hi => ?_⟩
  rw [List.mem_append, not_or] at hi
  simp only [hl i hi.1, hl' i hi.2, Set.inter_self]

end Exercise629
end

section
open NeighborhoodSystem

namespace Exercise629

universe u v

variable {ι : Type u} {α : ι → Type v}

theorem iprodNbhd_injective {X X' : ∀ i, Set (α i)} (h : iprodNbhd X = iprodNbhd X') :
     X = X' := by
  funext i; apply Set.ext; intro a
  simpa only [mem_iprodNbhd] using Set.ext_iff.mp h ⟨i, a⟩

theorem iprodNbhd_inter (X X' : ∀ i, Set (α i)) :
    iprodNbhd X ∩ iprodNbhd X' = iprodNbhd (fun i => X i ∩ X' i) := by
  apply Set.ext; rintro ⟨i, a⟩; simp [iprodNbhd, Set.mem_inter_iff]

theorem iprodNbhd_subset_iff {X X' : ∀ i, Set (α i)} :
    iprodNbhd X ⊆ iprodNbhd X' ↔ ∀ i, X i ⊆ X' i := by
  constructor
  · intro h i a ha; exact h (show (⟨i, a⟩ : Σ i, α i) ∈ iprodNbhd X from ha)
  · rintro h ⟨i, a⟩ ha; exact h i ha

end Exercise629
end

section
open NeighborhoodSystem

namespace Exercise629

universe u v

variable {ι : Type u} {α : ι → Type v}

variable {D : ∀ i, NeighborhoodSystem (α i)}

theorem FinSupp.master : FinSupp D (fun i => (D i).master) := ⟨[], fun _ _ => rfl⟩

end Exercise629
end
end DomainTheory.NeighbourhoodSystems
```

```
end
```

3.7.22 Exercise 6.20 — tokens of a functor

Exercise_6_20.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Definition_6_13

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise619
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB
open DomainTheory.NeighbourhoodSystems.Exercise510
section
namespace Exercise619
variable {A₀ A₁ B₀ B₁ C₀ C₁ : ScottSys}

theorem exists_tok_fixedPoint (T : FExpr) (hT : T.RootedConst) :
    ∃ Γ : Set Str, ([] : Str) ∈ Γ ∧ mFun T Γ = Γ :=
  ⟨⋃ n, mIter T n, Set.mem_iUnion.mpr ⟨0, nil_mem_mIter T hT 0⟩, mFun_iter_fixed T hT⟩

theorem exists_singleton_subsystem (T : FExpr) (hT : T.RootedConst) :
    ∃ (Γ : Set Str) (h : Γ.Nonempty),
      (singletonSys Γ h).sys ? (T.obj (singletonSys Γ h)).sys := by
  obtain ⟨Γ, hnil, hfix⟩ := exists_tok_fixedPoint T hT
  have hne : Γ.Nonempty := ⟨[], hnil⟩

  have hmaster : (T.obj (singletonSys Γ hne)).sys.master = Γ :=
    (mFun_eq_master T hne).symm.trans hfix
  refine ⟨Γ, hne, ?_, ?_, ?_⟩
  ·
    exact hmaster.symm
  ·
    intro X hX
    have heq : X = (T.obj (singletonSys Γ hne)).sys.master := (hX : X = Γ).trans
    hmaster.symm
    rw [heq]
    exact (T.obj (singletonSys Γ hne)).sys.master_mem
  ·
    intro X Y hX hY _
    show X ∩ Y = Γ
    rw [show X = Γ from hX, show Y = Γ from hY, Set.inter_self]

theorem prodMapTok_comp (f₀ : ApproximableMap A₀.sys B₀.sys) (f₁ : ApproximableMap A₁.
    sys B₁.sys)
    (g₀ : ApproximableMap B₀.sys C₀.sys) (g₁ : ApproximableMap B₁.sys C₁.sys) :
```

```
    prodMapTok (g₀.comp f₀) (g₁.comp f₁) = (prodMapTok g₀ g₁).comp (prodMapTok f₀ f₁) :=
     by
  apply ApproximableMap.ext
  intro W W''
  constructor
  · rintro ⟨X, Y, X'', Y'', ⟨X', hf0, hg0⟩, ⟨Y', hf1, hg1⟩, rfl, rfl⟩
    exact ⟨prodTokNbhd X' Y', ⟨X, Y, X', Y', hf0, hf1, rfl, rfl⟩,
      ⟨X', Y', X'', Y'', hg0, hg1, rfl, rfl⟩⟩
  · rintro ⟨W', ⟨X, Y, X', Y', hf0, hf1, rfl, rfl⟩, ⟨X₂, Y₂, X'', Y'', hg0, hg1, hWeq,
    rfl⟩⟩
    obtain ⟨rfl, rfl⟩ := prodTokNbhd_injective hWeq
    exact ⟨X, Y, X'', Y'', ⟨X', hf0, hg0⟩, ⟨Y', hf1, hg1⟩, rfl, rfl⟩

theorem prodMapTok_id :
    prodMapTok (idMap A₀.sys) (idMap A₁.sys) = idMap (A₀.prod A₁).sys := by
  apply ApproximableMap.ext
  intro W W'
  constructor
  · rintro ⟨X, Y, X', Y', ⟨hX, hX', hsX⟩, ⟨hY, hY', hsY⟩, rfl, rfl⟩
    exact ⟨prodTok_mem_prodTokNbhd hX hY, prodTok_mem_prodTokNbhd hX' hY',
      prodTokNbhd_subset_iff.mpr ⟨hsX, hsY⟩⟩
  · rintro ⟨⟨X, Y, hX, hY, rfl⟩, ⟨X', Y', hX', hY', rfl⟩, hsub⟩
    obtain ⟨hsX, hsY⟩ := prodTokNbhd_subset_iff.mp hsub
    exact ⟨X, Y, X', Y', ⟨hX, hX', hsX⟩, ⟨hY, hY', hsY⟩, rfl, rfl⟩

theorem prodMapTok_isStrict {f₀ : ApproximableMap A₀.sys B₀.sys}
    {f₁ : ApproximableMap A₁.sys B₁.sys} (hf₀ : IsStrict f₀) (hf₁ : IsStrict f₁) :
    IsStrict (prodMapTok f₀ f₁) := by
  rintro Y ⟨X, Y0, X', Y', h0, h1, hWeq, rfl⟩
  obtain ⟨rfl, rfl⟩ := prodTokNbhd_injective hWeq
  rw [hf₀ h0, hf₁ h1]
  rfl

theorem prodMapTok_mono {f₀ f₀' : ApproximableMap A₀.sys B₀.sys}
    {f₁ f₁' : ApproximableMap A₁.sys B₁.sys} (h0 : f₀ ≤ f₀') (h1 : f₁ ≤ f₁') :
    prodMapTok f₀ f₁ ≤ prodMapTok f₀' f₁' := by
  rw [ApproximableMap.le_iff]
  rintro W W' ⟨X, Y, X', Y', hr0, hr1, rfl, rfl⟩
  exact ⟨X, Y, X', Y', h0 X X' hr0, h1 Y Y' hr1, rfl, rfl⟩

theorem prodTok_subsystem (h0 : A₀.sys ? B₀.sys) (h1 : A₁.sys ? B₁.sys) :
    (A₀.prod A₁).sys ? (B₀.prod B₁).sys := by
  have heqm : prodTokNbhd A₀.sys.master A₁.sys.master
      = prodTokNbhd B₀.sys.master B₁.sys.master := by rw [h0.master_eq, h1.master_eq]
  refine ⟨heqm, ?_, ?_⟩
  · rintro W ⟨X, Y, hX, hY, rfl⟩
    exact ⟨X, Y, h0.sub hX, h1.sub hY, rfl⟩
  · rintro W W' ⟨X, Y, hX, hY, rfl⟩ ⟨X', Y', hX', hY', rfl⟩ hInt
    rw [prodTokNbhd_inter] at hInt ⊢
    obtain ⟨X'', Y'', hX'', hY'', heq⟩ := hInt
    obtain ⟨rfl, rfl⟩ := prodTokNbhd_injective heq
    exact ⟨X ∩ X', Y ∩ Y', h0.inter_closed hX hX' hX'', h1.inter_closed hY hY' hY'',
    rfl⟩

end Exercise619
end
```

```
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise619
section
set_option linter.unusedVariables false

theorem example_619_part_b : ∀ {A₀ A₁ B₀ B₁ : DomainTheory.NeighbourhoodSystems.
    Exercise619.ScottSys},
  @DomainTheory.NeighbourhoodSystems.Subsystem DomainTheory.NeighbourhoodSystems.
    ExampleB.Str A₀.sys B₀.sys →
    @DomainTheory.NeighbourhoodSystems.Subsystem DomainTheory.NeighbourhoodSystems.
    ExampleB.Str A₁.sys B₁.sys →
      @DomainTheory.NeighbourhoodSystems.Subsystem DomainTheory.NeighbourhoodSystems.
    ExampleB.Str (A₀.prod A₁).sys
        (B₀.prod B₁).sys :=
  @DomainTheory.NeighbourhoodSystems.Exercise619.prodTok_subsystem
end

end DomainTheory.NeighbourhoodSystems.Exercise619
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise619
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB
open DomainTheory.NeighbourhoodSystems.Exercise510

section
namespace Exercise619

variable {A₀ A₁ B₀ B₁ C₀ C₁ : ScottSys}

theorem sumMapTok_comp (f₀ : ApproximableMap A₀.sys B₀.sys) (f₁ : ApproximableMap A₁.sys
     B₁.sys)
    (g₀ : ApproximableMap B₀.sys C₀.sys) (g₁ : ApproximableMap B₁.sys C₁.sys) :
    sumMapTok (g₀.comp f₀) (g₁.comp f₁) = (sumMapTok g₀ g₁).comp (sumMapTok f₀ f₁) := by
  apply ApproximableMap.ext
  intro W W''
  constructor
  · rintro (⟨hW, rfl⟩ | ⟨X, X'', ⟨X', hf, hg⟩, rfl, rfl⟩ | ⟨Y, Y'', ⟨Y', hf, hg⟩, rfl, rfl
    ⟩)
    · exact ⟨sumTokMaster B₀.sys B₁.sys, Or.inl ⟨hW, rfl⟩,
        Or.inl ⟨(B₀.sum B₁).sys.master_mem, rfl⟩⟩
    · exact ⟨embBit false X', Or.inr (Or.inl ⟨X, X', hf, rfl, rfl⟩),
        Or.inr (Or.inl ⟨X', X'', hg, rfl, rfl⟩)⟩
    · exact ⟨embBit true Y', Or.inr (Or.inr ⟨Y, Y', hf, rfl, rfl⟩),
        Or.inr (Or.inr ⟨Y', Y'', hg, rfl, rfl⟩)⟩
  · rintro ⟨W', hWW', hW'W''⟩
    rcases hWW' with ⟨hW, rfl⟩ | ⟨X, X', hf, rfl, rfl⟩ | ⟨Y, Y', hf, rfl, rfl⟩
    · rcases hW'W'' with ⟨-, rfl⟩ | ⟨X, X', -, heq, -⟩ | ⟨Y, Y', -, heq, -⟩
      · exact Or.inl ⟨hW, rfl⟩
      · exact absurd (heq ▸ nil_mem_sumTokMaster) nil_not_mem_embBit
      · exact absurd (heq ▸ nil_mem_sumTokMaster) nil_not_mem_embBit
    · rcases hW'W'' with ⟨-, rfl⟩ | ⟨X₂, X'', hg, heq, rfl⟩ | ⟨Y₂, Y'', hg, heq, -⟩
      · exact Or.inl ⟨Or.inr (Or.inl ⟨X, f₀.rel_dom hf, rfl⟩), rfl⟩
      · obtain rfl := embBit_injective heq
        exact Or.inr (Or.inl ⟨X, X'', ⟨X', hf, hg⟩, rfl, rfl⟩)
      · exact absurd heq (embBit_ne (by decide) (B₀.ne X' (f₀.rel_cod hf)))
```

```
    · rcases hW'W'' with ⟨-, rfl⟩ | ⟨X₂, X'', hg, heq, -⟩ | ⟨Y₂, Y'', hg, heq, rfl⟩
      · exact Or.inl ⟨Or.inr (Or.inr ⟨Y, f₁.rel_dom hf, rfl⟩), rfl⟩
      · exact absurd heq (embBit_ne (by decide) (B₁.ne Y' (f₁.rel_cod hf)))
      · obtain rfl := embBit_injective heq
        exact Or.inr (Or.inr ⟨Y, Y'', ⟨Y', hf, hg⟩, rfl, rfl⟩)

theorem FExpr.map_comp : (T : FExpr) → {X Y Z : ScottSys} → (f : ApproximableMap X.
    sys Y.sys) →
    (g : ApproximableMap Y.sys Z.sys) → T.map (g.comp f) = (T.map g).comp (T.map f)
  | .const D, _, _, _, _, _ => (idMap_comp (idMap D.sys)).symm
  | .var, _, _, _, _, _ => rfl
  | .sum T₀ T₁, _, _, _, f, g => by
      show sumMapTok (T₀.map (g.comp f)) (T₁.map (g.comp f))
          = (sumMapTok (T₀.map g) (T₁.map g)).comp (sumMapTok (T₀.map f) (T₁.map f))
      rw [T₀.map_comp f g, T₁.map_comp f g, sumMapTok_comp]
  | .prod T₀ T₁, _, _, _, f, g => by
      show prodMapTok (T₀.map (g.comp f)) (T₁.map (g.comp f))
          = (prodMapTok (T₀.map g) (T₁.map g)).comp (prodMapTok (T₀.map f) (T₁.map f))
      rw [T₀.map_comp f g, T₁.map_comp f g, prodMapTok_comp]

theorem sumMapTok_id :
    sumMapTok (idMap A₀.sys) (idMap A₁.sys) = idMap (A₀.sum A₁).sys := by
  apply ApproximableMap.ext
  intro W W'
  constructor
  · rintro (⟨hW, rfl⟩ | ⟨X, X', ⟨hX, hX', hsub⟩, rfl, rfl⟩ | ⟨Y, Y', ⟨hY, hY', hsub⟩, rfl,
     rfl⟩)
    · exact ⟨hW, (A₀.sum A₁).sys.master_mem, (A₀.sum A₁).sys.sub_master hW⟩
    · exact ⟨Or.inr (Or.inl ⟨X, hX, rfl⟩), Or.inr (Or.inl ⟨X', hX', rfl⟩), embBit_subset.
    mpr hsub⟩
    · exact ⟨Or.inr (Or.inr ⟨Y, hY, rfl⟩), Or.inr (Or.inr ⟨Y', hY', rfl⟩), embBit_subset.
    mpr hsub⟩
  · rintro ⟨hW, hW', hsub⟩
    rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
    · exact Or.inl ⟨hW, rfl⟩
    · rcases hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
      · exact absurd (hsub nil_mem_sumTokMaster) nil_not_mem_embBit
      · exact Or.inr (Or.inl ⟨X, X', ⟨hX, hX', embBit_subset.mp hsub⟩, rfl, rfl⟩)
      · exact absurd hsub (fun h => embBit_not_subset_cross (by decide) (A₁.ne Y hY) h)
    · rcases hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
      · exact absurd (hsub nil_mem_sumTokMaster) nil_not_mem_embBit
      · exact absurd hsub (fun h => embBit_not_subset_cross (by decide) (A₀.ne X hX) h)
      · exact Or.inr (Or.inr ⟨Y, Y', ⟨hY, hY', embBit_subset.mp hsub⟩, rfl, rfl⟩)

theorem FExpr.map_id : (T : FExpr) → (X : ScottSys) → T.map (idMap X.sys) = idMap (T.
    obj X).sys
  | .const D, _ => rfl
  | .var, _ => rfl
  | .sum T₀ T₁, X => by
      show sumMapTok (T₀.map (idMap X.sys)) (T₁.map (idMap X.sys))
          = idMap ((T₀.obj X).sum (T₁.obj X)).sys
      rw [T₀.map_id X, T₁.map_id X, sumMapTok_id]
  | .prod T₀ T₁, X => by
      show prodMapTok (T₀.map (idMap X.sys)) (T₁.map (idMap X.sys))
          = idMap ((T₀.obj X).prod (T₁.obj X)).sys
      rw [T₀.map_id X, T₁.map_id X, prodMapTok_id]
```

```
theorem sumMapTok_isStrict (f₀ : ApproximableMap A₀.sys B₀.sys)
    (f₁ : ApproximableMap A₁.sys B₁.sys) : IsStrict (sumMapTok f₀ f₁) := by
  rintro Y (⟨-, rfl⟩ | ⟨X, X', -, heq, -⟩ | ⟨Y0, Y', -, heq, -⟩)
  · rfl
  · have heq' : sumTokMaster A₀.sys A₁.sys = embBit false X := heq
    exact absurd (heq' ▶ nil_mem_sumTokMaster) nil_not_mem_embBit
  · have heq' : sumTokMaster A₀.sys A₁.sys = embBit true Y0 := heq
    exact absurd (heq' ▶ nil_mem_sumTokMaster) nil_not_mem_embBit

theorem FExpr.map_isStrict : (T : FExpr) → {X Y : ScottSys} → (f : ApproximableMap X.
    sys Y.sys) →
    IsStrict f → IsStrict (T.map f)
  | .const _, _, _, _, _ => isStrict_idMap
  | .var, _, _, _, hf => hf
  | .sum T₀ T₁, _, _, f, _ => sumMapTok_isStrict (T₀.map f) (T₁.map f)
  | .prod T₀ T₁, _, _, f, hf =>
      prodMapTok_isStrict (T₀.map_isStrict f hf) (T₁.map_isStrict f hf)

theorem sumMapTok_mono {f₀ f₀' : ApproximableMap A₀.sys B₀.sys}
    {f₁ f₁' : ApproximableMap A₁.sys B₁.sys} (h0 : f₀ ≤ f₀') (h1 : f₁ ≤ f₁') :
    sumMapTok f₀ f₁ ≤ sumMapTok f₀' f₁' := by
  rw [ApproximableMap.le_iff]
  rintro W W' (⟨hW, rfl⟩ | ⟨X, X', hrel, rfl, rfl⟩ | ⟨Y, Y', hrel, rfl, rfl⟩)
  · exact Or.inl ⟨hW, rfl⟩
  · exact Or.inr (Or.inl ⟨X, X', h0 X X' hrel, rfl, rfl⟩)
  · exact Or.inr (Or.inr ⟨Y, Y', h1 Y Y' hrel, rfl, rfl⟩)

theorem FExpr.map_mono : (T : FExpr) → {X Y : ScottSys} → {f f' : ApproximableMap X.
    sys Y.sys} →
    f ≤ f' → T.map f ≤ T.map f'
  | .const _, _, _, _, _, _ => le_rfl
  | .var, _, _, _, _, h => h
  | .sum T₀ T₁, _, _, _, _, h => sumMapTok_mono (T₀.map_mono h) (T₁.map_mono h)
  | .prod T₀ T₁, _, _, _, _, h => prodMapTok_mono (T₀.map_mono h) (T₁.map_mono h)

theorem FExpr.map_continuous_mp : (T : FExpr) → {I : Type} → {X Y : ScottSys} →
    {g : I → ApproximableMap X.sys Y.sys} → {f : ApproximableMap X.sys Y.sys} →
    [Nonempty I] → (∀ i j, ∃ k, g i ≤ g k ∧ g j ≤ g k) →
    (∀ A B, f.rel A B ↔ ∃ i, (g i).rel A B) →
    {A B : Set Str} → (T.map f).rel A B → ∃ i, (T.map (g i)).rel A B
  | .const _, _, _, _, _, _, _, _, _, _, _, hrel => by
      obtain ⟨i⟩ := ?Nonempty _?; exact ⟨i, hrel⟩
  | .var, _, _, _, _, _, _, hf, A, B, hrel => (hf A B).mp hrel
  | .sum T₀ T₁, _, _, _, _, _, _, hdir, hf, _, _, hrel => by
      rcases hrel with ⟨hA, rfl⟩ | ⟨P, P', hr, rfl, rfl⟩ | ⟨Q, Q', hr, rfl, rfl⟩
      · obtain ⟨i⟩ := ?Nonempty _?; exact ⟨i, Or.inl ⟨hA, rfl⟩⟩
      · obtain ⟨i, hi⟩ := T₀.map_continuous_mp hdir hf hr
        exact ⟨i, Or.inr (Or.inl ⟨P, P', hi, rfl, rfl⟩)⟩
      · obtain ⟨i, hi⟩ := T₁.map_continuous_mp hdir hf hr
        exact ⟨i, Or.inr (Or.inr ⟨Q, Q', hi, rfl, rfl⟩)⟩
  | .prod T₀ T₁, _, _, _, _, _, _, hdir, hf, _, _, hrel => by
      obtain ⟨P, Q, P', Q', hr0, hr1, rfl, rfl⟩ := hrel
      obtain ⟨i, hi⟩ := T₀.map_continuous_mp hdir hf hr0
      obtain ⟨j, hj⟩ := T₁.map_continuous_mp hdir hf hr1
      obtain ⟨k, hik, hjk⟩ := hdir i j
```

```
      exact ⟨k, P, Q, P', Q', (T₀.map_mono hik) P P' hi, (T₁.map_mono hjk) Q Q' hj, rfl
    , rfl⟩

theorem FExpr.map_continuous (T : FExpr) {I : Type} [Nonempty I] {X Y : ScottSys}
    (g : I → ApproximableMap X.sys Y.sys) (f : ApproximableMap X.sys Y.sys)
    (hdir : ∀ i j, ∃ k, g i ≤ g k ∧ g j ≤ g k)
    (hf : ∀ A B, f.rel A B ↔ ∃ i, (g i).rel A B) (A B : Set Str) :
    (T.map f).rel A B ↔ ∃ i, (T.map (g i)).rel A B := by
  refine ⟨T.map_continuous_mp hdir hf, ?_⟩
  rintro ⟨i, hi⟩
  have hgif : g i ≤ f := by
    rw [ApproximableMap.le_iff]; intro A' B' h; exact (hf A' B').mpr ⟨i, h⟩
  exact (T.map_mono hgif) A B hi

theorem sumTok_subsystem (h0 : A₀.sys ? B₀.sys) (h1 : A₁.sys ? B₁.sys) :
    (A₀.sum A₁).sys ? (B₀.sum B₁).sys := by
  have heqm : sumTokMaster A₀.sys A₁.sys = sumTokMaster B₀.sys B₁.sys := by
    unfold sumTokMaster; rw [h0.master_eq, h1.master_eq]
  refine ⟨heqm, ?_, ?_⟩
  · rintro W (rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩)
    · exact Or.inl heqm
    · exact Or.inr (Or.inl ⟨X, h0.sub hX, rfl⟩)
    · exact Or.inr (Or.inr ⟨Y, h1.sub hY, rfl⟩)
  · rintro W W' (rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩) (rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
    ) hInt
    · rw [Set.inter_self]; exact Or.inl rfl
    · rw [sumTokMaster_inter_embF hX']; exact Or.inr (Or.inl ⟨X', hX', rfl⟩)
    · rw [sumTokMaster_inter_embT hY']; exact Or.inr (Or.inr ⟨Y', hY', rfl⟩)
    · rw [Set.inter_comm, sumTokMaster_inter_embF hX]; exact Or.inr (Or.inl ⟨X, hX, rfl⟩
    )
    · rw [embBit_inter] at hInt ⊢
      exact Or.inr (Or.inl ⟨X ∩ X',
        h0.inter_closed hX hX' (sumTok_mem_embF_inv (h₀ := B₀.ne) (h₁ := B₁.ne) hInt),
    rfl⟩)
    · rw [embBit_inter_ne (show (false : Bool) = true by decide)] at hInt
      exact absurd ((B₀.sum B₁).ne _ hInt) Set.not_nonempty_empty
    · rw [Set.inter_comm, sumTokMaster_inter_embT hY]; exact Or.inr (Or.inr ⟨Y, hY, rfl⟩
    )
    · rw [embBit_inter_ne (show (true : Bool) = false by decide)] at hInt
      exact absurd ((B₀.sum B₁).ne _ hInt) Set.not_nonempty_empty
    · rw [embBit_inter] at hInt ⊢
      exact Or.inr (Or.inr ⟨Y ∩ Y',
        h1.inter_closed hY hY' (sumTok_mem_embT_inv (h₀ := B₀.ne) (h₁ := B₁.ne) hInt),
    rfl⟩)

theorem FExpr.obj_subsystem : (T : FExpr) → {X Y : ScottSys} → X.sys ? Y.sys →
    (T.obj X).sys ? (T.obj Y).sys
  | .const D, _, _, _ => Subsystem.refl D.sys
  | .var, _, _, h => h
  | .sum T₀ T₁, _, _, h => sumTok_subsystem (T₀.obj_subsystem h) (T₁.obj_subsystem h)
  | .prod T₀ T₁, _, _, h => prodTok_subsystem (T₀.obj_subsystem h) (T₁.obj_subsystem h)

theorem FExpr.obj_continuous_mp : (T : FExpr) → {? : Set ScottSys} → {U : ScottSys}
    →
    DirectedOn (fun a b => a.sys ? b.sys) ? → ?.Nonempty →
    (∀ D ∈ ?, D.sys ? U.sys) → (∀ X, U.sys.mem X ↔ ∃ D ∈ ?, D.sys.mem X) →
```

```
    {W : Set Str} → (T.obj U).sys.mem W → ∃ D ∈ ?, (T.obj D).sys.mem W
  | .const _, _, _, _, hne, _, _, _, hmem => by
      obtain ⟨D, hD⟩ := hne; exact ⟨D, hD, hmem⟩
  | .var, _, _, _, _, _, hU, W, hmem => (hU W).mp hmem
  | .sum T₀ T₁, _, _, hdir, hne, hsub, hU, _, hmem => by
      rcases hmem with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
      · obtain ⟨D, hD⟩ := hne
        exact ⟨D, hD, Or.inl ((FExpr.sum T₀ T₁).obj_subsystem (hsub D hD)).master_eq.
    symm⟩
      · obtain ⟨D, hD, hXD⟩ := T₀.obj_continuous_mp hdir hne hsub hU hX
        exact ⟨D, hD, Or.inr (Or.inl ⟨X, hXD, rfl⟩)⟩
      · obtain ⟨D, hD, hYD⟩ := T₁.obj_continuous_mp hdir hne hsub hU hY
        exact ⟨D, hD, Or.inr (Or.inr ⟨Y, hYD, rfl⟩)⟩
  | .prod T₀ T₁, _, _, hdir, hne, hsub, hU, _, hmem => by
      obtain ⟨X, Y, hX, hY, rfl⟩ := hmem
      obtain ⟨D₁, hD₁, hXD⟩ := T₀.obj_continuous_mp hdir hne hsub hU hX
      obtain ⟨D₂, hD₂, hYD⟩ := T₁.obj_continuous_mp hdir hne hsub hU hY
      obtain ⟨D₃, hD₃, hr1, hr2⟩ := hdir D₁ hD₁ D₂ hD₂
      exact ⟨D₃, hD₃, X, Y, (T₀.obj_subsystem hr1).sub hXD, (T₁.obj_subsystem hr2).sub
    hYD, rfl⟩

theorem FExpr.obj_continuous (T : FExpr) {? : Set ScottSys} {U : ScottSys}
    (hdir : DirectedOn (fun a b => a.sys ? b.sys) ?) (hne : ?.Nonempty)
    (hsub : ∀ D ∈ ?, D.sys ? U.sys) (hU : ∀ X, U.sys.mem X ↔ ∃ D ∈ ?, D.sys.mem X)
    (W : Set Str) : (T.obj U).sys.mem W ↔ ∃ D ∈ ?, (T.obj D).sys.mem W := by
  refine ⟨T.obj_continuous_mp hdir hne hsub hU, ?_⟩
  rintro ⟨D, hD, hmem⟩
  exact (T.obj_subsystem (hsub D hD)).sub hmem

end Exercise619
end

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}
variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}
variable {A₀ A₁ B₀ B₁ : ScottSys}
variable {C₀ C₁ : ScottSys}

inductive GExpr where
  | const : ScottSys → GExpr
  | var : GExpr
  | sum : GExpr → GExpr → GExpr
  | prod : GExpr → GExpr → GExpr
  | oplus : GExpr → GExpr → GExpr
  | otimes : GExpr → GExpr → GExpr

end Exercise619
end

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}
```

```
theorem inter_ne_of_ne_left {X X' Δ : Set Str} (hX : X ⊆ Δ) (hne : X = Δ) : X ∩ X' =
    Δ := by
  intro h
  exact hne (Set.Subset.antisymm hX (by rw [← h]; exact Set.inter_subset_left))

end Exercise619
end

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

variable {A₀ A₁ B₀ B₁ : ScottSys}

variable {C₀ C₁ : ScottSys}

def GExpr.naryOp (op : GExpr → GExpr → GExpr) (a : GExpr) : List GExpr → GExpr
  | [] => a
  | b :: l => op a (GExpr.naryOp op b l)

def GExpr.naryProd : GExpr → List GExpr → GExpr := GExpr.naryOp GExpr.prod

def GExpr.narySum : GExpr → List GExpr → GExpr := GExpr.naryOp GExpr.sum

end Exercise619
end

end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 6.20. For any system $\mathcal{D}$ let $\mathrm{tok}(\mathcal{D})$ be the underlying set of tokens, so that $\mathcal{D}$ is a system over $\mathrm{tok}(\mathcal{D})$. For the category of Exercise 6.19 show that the function

$$\lambda\Gamma.\,\mathrm{tok}(T(\{\Gamma\}))$$

is continuous on the domain $\{\Gamma \subseteq \{0,1\}^* \mid \Lambda \in \Gamma\}$, where T is any of the functors generated in 6.19. Conclude that there must exist a set

$$\Gamma = \mathrm{tok}(T(\{\Gamma\})),$$

so that $\{\Gamma\} \lhd T(\{\Gamma\})$, and so 6.14 applies.

3.7.23 Exercise 6.21 — coalesced sum and smash

Exercise_6_21.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_20

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12
```

```
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise619
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB
open DomainTheory.NeighbourhoodSystems.Exercise510
section
namespace Exercise619
variable {D₀ D₁ : NeighborhoodSystem Str}

def oplusTok (D₀ D₁ : NeighborhoodSystem Str)
    (h₀ : ∀ X, D₀.mem X → X.Nonempty) (h₁ : ∀ Y, D₁.mem Y → Y.Nonempty) :
    NeighborhoodSystem Str where
  mem W := W = sumTokMaster D₀ D₁ ∨ (∃ X, D₀.mem X ∧ X = D₀.master ∧ W = embBit false X
    ) ∨
    (∃ Y, D₁.mem Y ∧ Y = D₁.master ∧ W = embBit true Y)
  master := sumTokMaster D₀ D₁
  master_nonempty := ⟨[], nil_mem_sumTokMaster⟩
  master_mem := Or.inl rfl
  sub_master := by
    rintro W (rfl | ⟨X, hX, -, rfl⟩ | ⟨Y, hY, -, rfl⟩)
    · exact subset_rfl
    · exact embF_subset_sumTokMaster hX
    · exact embT_subset_sumTokMaster hY
  inter_mem := by
    have hne : ∀ W, (W = sumTokMaster D₀ D₁ ∨ (∃ X, D₀.mem X ∧ X = D₀.master ∧ W =
    embBit false X) ∨
        (∃ Y, D₁.mem Y ∧ Y = D₁.master ∧ W = embBit true Y)) → (W : Set Str).Nonempty
    := by
      rintro W (rfl | ⟨X, hX, -, rfl⟩ | ⟨Y, hY, -, rfl⟩)
      · exact ⟨[], nil_mem_sumTokMaster⟩
      · exact embBit_nonempty (h₀ X hX)
      · exact embBit_nonempty (h₁ Y hY)
    rintro W W' Z hW hW' hZ hZsub
    rcases hW with rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩
    · rcases hW' with rfl | ⟨X', hX', hX'ne, rfl⟩ | ⟨Y', hY', hY'ne, rfl⟩
      · rw [Set.inter_self]; exact Or.inl rfl
      · rw [sumTokMaster_inter_embF hX']; exact Or.inr (Or.inl ⟨X', hX', hX'ne, rfl⟩)
      · rw [sumTokMaster_inter_embT hY']; exact Or.inr (Or.inr ⟨Y', hY', hY'ne, rfl⟩)
    · rcases hW' with rfl | ⟨X', hX', hX'ne, rfl⟩ | ⟨Y', hY', hY'ne, rfl⟩
      · rw [Set.inter_comm, sumTokMaster_inter_embF hX]
        exact Or.inr (Or.inl ⟨X, hX, hXne, rfl⟩)
      · rw [embBit_inter] at hZsub ⊢
        rcases hZ with rfl | ⟨Z₀, hZ₀, -, rfl⟩ | ⟨Z₁, hZ₁, -, rfl⟩
        · exact absurd (hZsub nil_mem_sumTokMaster) nil_not_mem_embBit
        · exact Or.inr (Or.inl ⟨X ∩ X', D₀.inter_mem hX hX' hZ₀ (embBit_subset.mp hZsub)
    ,
            inter_ne_of_ne_left (D₀.sub_master hX) hXne, rfl⟩)
        · obtain ⟨b, hb⟩ := h₁ Z₁ hZ₁
          obtain ⟨w', he, -⟩ := hZsub (⟨b, rfl, hb⟩ : (true :: b) ∈ embBit true Z₁)
          simp only [List.cons.injEq] at he; exact absurd he.1 (by decide)
      · rw [embBit_inter_ne (show (false : Bool) = true by decide)] at hZsub ⊢
        obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
```

```
    · rcases hW' with rfl | ⟨X', hX', hX'ne, rfl⟩ | ⟨Y', hY', hY'ne, rfl⟩
      · rw [Set.inter_comm, sumTokMaster_inter_embT hY]
        exact Or.inr (Or.inr ⟨Y, hY, hYne, rfl⟩)
      · rw [embBit_inter_ne (show (true : Bool) = false by decide)] at hZsub ⊢
        obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
      · rw [embBit_inter] at hZsub ⊢
        rcases hZ with rfl | ⟨Z₀, hZ₀, -, rfl⟩ | ⟨Z₁, hZ₁, -, rfl⟩
        · exact absurd (hZsub nil_mem_sumTokMaster) nil_not_mem_embBit
        · obtain ⟨a, ha⟩ := h₀ Z₀ hZ₀
          obtain ⟨w', he, -⟩ := hZsub (⟨a, rfl, ha⟩ : (false :: a) ∈ embBit false Z₀)
          simp only [List.cons.injEq] at he; exact absurd he.1 (by decide)
        · exact Or.inr (Or.inr ⟨Y ∩ Y', D₁.inter_mem hY hY' hZ₁ (embBit_subset.mp hZsub)
    ,
            inter_ne_of_ne_left (D₁.sub_master hY) hYne, rfl⟩)

end Exercise619
end

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

theorem oplusTok_mem_embF {X : Set Str} (hX : D₀.mem X) (hXne : X = D₀.master) :
    (oplusTok D₀ D₁ h₀ h₁).mem (embBit false X) := Or.inr (Or.inl ⟨X, hX, hXne, rfl⟩)

theorem oplusTok_mem_embT {Y : Set Str} (hY : D₁.mem Y) (hYne : Y = D₁.master) :
    (oplusTok D₀ D₁ h₀ h₁).mem (embBit true Y) := Or.inr (Or.inr ⟨Y, hY, hYne, rfl⟩)

theorem oplusTok_nonempty : ∀ W, (oplusTok D₀ D₁ h₀ h₁).mem W → W.Nonempty := by
  rintro W (rfl | ⟨X, hX, -, rfl⟩ | ⟨Y, hY, -, rfl⟩)
  · exact ⟨[], nil_mem_sumTokMaster⟩
  · exact embBit_nonempty (h₀ X hX)
  · exact embBit_nonempty (h₁ Y hY)

def ScottSys.oplus (A₀ A₁ : ScottSys) : ScottSys :=
  ⟨oplusTok A₀.sys A₁.sys A₀.ne A₁.ne, oplusTok_nonempty⟩

end Exercise619
end

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

variable {A₀ A₁ B₀ B₁ : ScottSys}

variable {C₀ C₁ : ScottSys}

def GExpr.naryOplus : GExpr → List GExpr → GExpr := GExpr.naryOp GExpr.oplus
```

```
def oplusMapTok (f₀ : ApproximableMap A₀.sys B₀.sys) (f₁ : ApproximableMap A₁.sys B₁.sys
    ) :
    ApproximableMap (A₀.oplus A₁).sys (B₀.oplus B₁).sys where
  rel W W' :=
    ((A₀.oplus A₁).sys.mem W ∧ W' = sumTokMaster B₀.sys B₁.sys) ∨
    (∃ X X', f₀.rel X X' ∧ X = A₀.sys.master ∧ X' = B₀.sys.master ∧
      W = embBit false X ∧ W' = embBit false X') ∨
    (∃ Y Y', f₁.rel Y Y' ∧ Y = A₁.sys.master ∧ Y' = B₁.sys.master ∧
      W = embBit true Y ∧ W' = embBit true Y')
  rel_dom := by
    rintro W W' (⟨hW, -⟩ | ⟨X, X', hrel, hXne, -, rfl, -⟩ | ⟨Y, Y', hrel, hYne, -, rfl,
    -⟩)
    · exact hW
    · exact oplusTok_mem_embF (h₀ := A₀.ne) (h₁ := A₁.ne) (f₀.rel_dom hrel) hXne
    · exact oplusTok_mem_embT (h₀ := A₀.ne) (h₁ := A₁.ne) (f₁.rel_dom hrel) hYne
  rel_cod := by
    rintro W W' (⟨-, rfl⟩ | ⟨X, X', hrel, -, hX'ne, -, rfl⟩ | ⟨Y, Y', hrel, -, hY'ne, -,
     rfl⟩)
    · exact Or.inl rfl
    · exact oplusTok_mem_embF (h₀ := B₀.ne) (h₁ := B₁.ne) (f₀.rel_cod hrel) hX'ne
    · exact oplusTok_mem_embT (h₀ := B₀.ne) (h₁ := B₁.ne) (f₁.rel_cod hrel) hY'ne
  master_rel := Or.inl ⟨(A₀.oplus A₁).sys.master_mem, rfl⟩
  inter_right := by
    rintro W W'₁ W'₂ h1 h2
    rcases h1 with ⟨hW, rfl⟩ | ⟨X, X', hrel, hXne, hX'ne, rfl, rfl⟩ | ⟨Y, Y', hrel, hYne
    , hY'ne, rfl, rfl⟩
    · rcases h2 with ⟨-, rfl⟩ | ⟨X, X', hrel, hXne, hX'ne, hWeq, rfl⟩ | ⟨Y, Y', hrel,
    hYne, hY'ne, hWeq, rfl⟩
      · exact Or.inl ⟨hW, by rw [Set.inter_self]⟩
      · exact Or.inr (Or.inl ⟨X, X', hrel, hXne, hX'ne, hWeq,
          by rw [sumTokMaster_inter_embF (f₀.rel_cod hrel)]⟩)
      · exact Or.inr (Or.inr ⟨Y, Y', hrel, hYne, hY'ne, hWeq,
          by rw [sumTokMaster_inter_embT (f₁.rel_cod hrel)]⟩)
    · rcases h2 with ⟨-, rfl⟩ | ⟨X₂, X'₂, hrel₂, hX₂ne, hX'₂ne, hWeq, rfl⟩ | ⟨Y₂, Y'₂,
    hrel₂, -, -, hWeq, rfl⟩
      · refine Or.inr (Or.inl ⟨X, X', hrel, hXne, hX'ne, rfl, ?_⟩)
        rw [Set.inter_comm, sumTokMaster_inter_embF (f₀.rel_cod hrel)]
      · obtain rfl := embBit_injective hWeq
        exact Or.inr (Or.inl ⟨X, X' ∩ X'₂, f₀.inter_right hrel hrel₂, hXne,
          inter_ne_of_ne_left (B₀.sys.sub_master (f₀.rel_cod hrel)) hX'ne, rfl,
          embBit_inter false X' X'₂⟩)
      · exact absurd hWeq (embBit_ne (by decide) (A₀.ne X (f₀.rel_dom hrel)))
    · rcases h2 with ⟨-, rfl⟩ | ⟨X₂, X'₂, hrel₂, -, -, hWeq, rfl⟩ | ⟨Y₂, Y'₂, hrel₂, hY₂ne
    , hY'₂ne, hWeq, rfl⟩
      · refine Or.inr (Or.inr ⟨Y, Y', hrel, hYne, hY'ne, rfl, ?_⟩)
        rw [Set.inter_comm, sumTokMaster_inter_embT (f₁.rel_cod hrel)]
      · exact absurd hWeq (embBit_ne (by decide) (A₁.ne Y (f₁.rel_dom hrel)))
      · obtain rfl := embBit_injective hWeq
        exact Or.inr (Or.inr ⟨Y, Y' ∩ Y'₂, f₁.inter_right hrel hrel₂, hYne,
          inter_ne_of_ne_left (B₁.sys.sub_master (f₁.rel_cod hrel)) hY'ne, rfl,
          embBit_inter true Y' Y'₂⟩)
  mono := by
    rintro W W'' Z Z' h hWW hZZ' hW'' hZ'
    rcases h with ⟨-, rfl⟩ | ⟨X, X', hrel, hXne, hX'ne, rfl, rfl⟩ | ⟨Y, Y', hrel, hYne,
    hY'ne, rfl, rfl⟩
    · exact Or.inl ⟨hW'', Set.Subset.antisymm ((B₀.oplus B₁).sys.sub_master hZ') hZZ'⟩
```

```
    · rcases hZ' with rfl | ⟨X₃, hX₃, hX₃ne, rfl⟩ | ⟨Y₃, hY₃, hY₃ne, rfl⟩
      · exact Or.inl ⟨hW'', rfl⟩
      · rcases hW'' with rfl | ⟨X₂, hX₂, hX₂ne, rfl⟩ | ⟨Y₂, hY₂, hY₂ne, rfl⟩
        · exact absurd (hWW nil_mem_sumTokMaster) nil_not_mem_embBit
        · exact Or.inr (Or.inl ⟨X₂, X₃,
            f₀.mono hrel (embBit_subset.mp hWW) (embBit_subset.mp hZZ') hX₂ hX₃,
            hX₂ne, hX₃ne, rfl, rfl⟩)
        · exact absurd hWW (fun hsub => embBit_not_subset_cross (by decide) (A₁.ne Y₂
    hY₂) hsub)
      · exact absurd hZZ' (fun hsub =>
          embBit_not_subset_cross (by decide) (B₀.ne X' (f₀.rel_cod hrel)) hsub)
    · rcases hZ' with rfl | ⟨X₃, hX₃, hX₃ne, rfl⟩ | ⟨Y₃, hY₃, hY₃ne, rfl⟩
      · exact Or.inl ⟨hW'', rfl⟩
      · exact absurd hZZ' (fun hsub =>
          embBit_not_subset_cross (by decide) (B₁.ne Y' (f₁.rel_cod hrel)) hsub)
      · rcases hW'' with rfl | ⟨X₂, hX₂, hX₂ne, rfl⟩ | ⟨Y₂, hY₂, hY₂ne, rfl⟩
        · exact absurd (hWW nil_mem_sumTokMaster) nil_not_mem_embBit
        · exact absurd hWW (fun hsub => embBit_not_subset_cross (by decide) (A₀.ne X₂
    hX₂) hsub)
        · exact Or.inr (Or.inr ⟨Y₂, Y₃,
            f₁.mono hrel (embBit_subset.mp hWW) (embBit_subset.mp hZZ') hY₂ hY₃,
            hY₂ne, hY₃ne, rfl, rfl⟩)

end Exercise619
end

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

def otimesTok (D₀ D₁ : NeighborhoodSystem Str) : NeighborhoodSystem Str where
  mem W := W = prodTokNbhd D₀.master D₁.master ∨
    (∃ X Y, D₀.mem X ∧ D₁.mem Y ∧ X = D₀.master ∧ Y = D₁.master ∧ W = prodTokNbhd X Y)
  master := prodTokNbhd D₀.master D₁.master
  master_nonempty := ⟨[], mem_prodTokNbhd_nil⟩
  master_mem := Or.inl rfl
  sub_master := by
    rintro W (rfl | ⟨X, Y, hX, hY, -, -, rfl⟩)
    · exact subset_rfl
    · exact prodTokNbhd_subset_iff.mpr ⟨D₀.sub_master hX, D₁.sub_master hY⟩
  inter_mem := by
    rintro W W' Z hW hW' hZ hZsub
    rcases hW with rfl | ⟨X, Y, hX, hY, hXne, hYne, rfl⟩
    · rcases hW' with rfl | ⟨X', Y', hX', hY', hX'ne, hY'ne, rfl⟩
      · rw [Set.inter_self]; exact Or.inl rfl
      · rw [prodTokNbhd_inter, Set.inter_eq_right.mpr (D₀.sub_master hX'),
          Set.inter_eq_right.mpr (D₁.sub_master hY')]
        exact Or.inr ⟨X', Y', hX', hY', hX'ne, hY'ne, rfl⟩
    · rcases hW' with rfl | ⟨X', Y', hX', hY', hX'ne, hY'ne, rfl⟩
      · rw [Set.inter_comm, prodTokNbhd_inter, Set.inter_eq_right.mpr (D₀.sub_master hX
    ),
          Set.inter_eq_right.mpr (D₁.sub_master hY)]
        exact Or.inr ⟨X, Y, hX, hY, hXne, hYne, rfl⟩
```

```
      · rw [prodTokNbhd_inter] at hZsub ⊢
        rcases hZ with rfl | ⟨Z₀, Z₁, hZ₀, hZ₁, -, -, rfl⟩
        · obtain ⟨hsub₀, -⟩ := prodTokNbhd_subset_iff.mp hZsub
          exact absurd (Set.Subset.antisymm (D₀.sub_master hX)
            (hsub₀.trans Set.inter_subset_left)) hXne
        · obtain ⟨hsub₀, hsub₁⟩ := prodTokNbhd_subset_iff.mp hZsub
          exact Or.inr ⟨X ∩ X', Y ∩ Y', D₀.inter_mem hX hX' hZ₀ hsub₀,
            D₁.inter_mem hY hY' hZ₁ hsub₁, inter_ne_of_ne_left (D₀.sub_master hX) hXne,
            inter_ne_of_ne_left (D₁.sub_master hY) hYne, rfl⟩

theorem otimesTok_mem_master : (otimesTok D₀ D₁).mem (prodTokNbhd D₀.master D₁.master)
    := Or.inl rfl

theorem otimesTok_mem_prod {X Y : Set Str} (hX : D₀.mem X) (hY : D₁.mem Y)
    (hXne : X = D₀.master) (hYne : Y = D₁.master) :
    (otimesTok D₀ D₁).mem (prodTokNbhd X Y) := Or.inr ⟨X, Y, hX, hY, hXne, hYne, rfl⟩

theorem otimesTok_nonempty : ∀ W, (otimesTok D₀ D₁).mem W → W.Nonempty := by
  rintro W (rfl | ⟨X, Y, -, -, -, -, rfl⟩) <;> exact ⟨[], mem_prodTokNbhd_nil⟩

def ScottSys.otimes (A₀ A₁ : ScottSys) : ScottSys :=
  ⟨otimesTok A₀.sys A₁.sys, otimesTok_nonempty⟩

end Exercise619
end

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

variable {A₀ A₁ B₀ B₁ : ScottSys}

variable {C₀ C₁ : ScottSys}

def GExpr.RootedConst : GExpr → Prop
  | .const C => ([] : Str) ∈ C.sys.master
  | .var => True
  | .sum a b => a.RootedConst ∧ b.RootedConst
  | .prod a b => a.RootedConst ∧ b.RootedConst
  | .oplus a b => a.RootedConst ∧ b.RootedConst
  | .otimes a b => a.RootedConst ∧ b.RootedConst

def gFun : GExpr → Set Str → Set Str
  | .const C, _ => C.sys.master
  | .var, Γ => Γ
  | .sum a b, Γ => insert ([] : Str) (embBit false (gFun a Γ) ∪ embBit true (gFun b Γ)
    )
  | .prod a b, Γ => insert ([] : Str) (embBit false (gFun a Γ) ∪ embBit true (gFun b Γ
    ))
  | .oplus a b, Γ => insert ([] : Str) (embBit false (gFun a Γ) ∪ embBit true (gFun b
    Γ))
  | .otimes a b, Γ => insert ([] : Str) (embBit false (gFun a Γ) ∪ embBit true (gFun b
     Γ))
```

```
def gIter (T : GExpr) : ℕ → Set Str
  | 0 => {([] : Str)}
  | n + 1 => gFun T (gIter T n)

def GExpr.naryOtimes : GExpr → List GExpr → GExpr := GExpr.naryOp GExpr.otimes

def GExpr.obj : GExpr → ScottSys → ScottSys
  | .const D, _ => D
  | .var, X => X
  | .sum a b, X => (a.obj X).sum (b.obj X)
  | .prod a b, X => (a.obj X).prod (b.obj X)
  | .oplus a b, X => (a.obj X).oplus (b.obj X)
  | .otimes a b, X => (a.obj X).otimes (b.obj X)

def otimesMapTok (f₀ : ApproximableMap A₀.sys B₀.sys) (f₁ : ApproximableMap A₁.sys B₁.
    sys) :
    ApproximableMap (A₀.otimes A₁).sys (B₀.otimes B₁).sys where
  rel W W' :=
    ((A₀.otimes A₁).sys.mem W ∧ W' = prodTokNbhd B₀.sys.master B₁.sys.master) ∨
    (∃ X Y X' Y', f₀.rel X X' ∧ f₁.rel Y Y' ∧ X = A₀.sys.master ∧ Y = A₁.sys.master ∧
      X' = B₀.sys.master ∧ Y' = B₁.sys.master ∧ W = prodTokNbhd X Y ∧ W' = prodTokNbhd
    X' Y')
  rel_dom := by
    rintro W W' (⟨hW, -⟩ | ⟨X, Y, X', Y', h0, h1, hXne, hYne, -, -, rfl, -⟩)
    · exact hW
    · exact otimesTok_mem_prod (f₀.rel_dom h0) (f₁.rel_dom h1) hXne hYne
  rel_cod := by
    rintro W W' (⟨-, rfl⟩ | ⟨X, Y, X', Y', h0, h1, -, -, hX'ne, hY'ne, -, rfl⟩)
    · exact otimesTok_mem_master
    · exact otimesTok_mem_prod (f₀.rel_cod h0) (f₁.rel_cod h1) hX'ne hY'ne
  master_rel := Or.inl ⟨(A₀.otimes A₁).sys.master_mem, rfl⟩
  inter_right := by
    rintro W W'₁ W'₂ h1 h2
    rcases h1 with ⟨hW, rfl⟩ | ⟨X, Y, X', Y', hr0, hr1, hXne, hYne, hX'ne, hY'ne, rfl,
    rfl⟩
    · rcases h2 with ⟨-, rfl⟩ | ⟨X, Y, X', Y', hr0, hr1, hXne, hYne, hX'ne, hY'ne, hWeq,
     rfl⟩
      · exact Or.inl ⟨hW, by rw [Set.inter_self]⟩
      · refine Or.inr ⟨X, Y, X', Y', hr0, hr1, hXne, hYne, hX'ne, hY'ne, hWeq, ?_⟩
        rw [prodTokNbhd_inter, Set.inter_eq_right.mpr (B₀.sys.sub_master (f₀.rel_cod
    hr0)),
          Set.inter_eq_right.mpr (B₁.sys.sub_master (f₁.rel_cod hr1))]
    · rcases h2 with ⟨-, rfl⟩ | ⟨X₂, Y₂, X'₂, Y'₂, hr0₂, hr1₂, hX₂ne, hY₂ne, hX'₂ne, hY'₂
    ne, hWeq, rfl⟩
      · refine Or.inr ⟨X, Y, X', Y', hr0, hr1, hXne, hYne, hX'ne, hY'ne, rfl, ?_⟩
        rw [Set.inter_comm, prodTokNbhd_inter,
          Set.inter_eq_right.mpr (B₀.sys.sub_master (f₀.rel_cod hr0)),
          Set.inter_eq_right.mpr (B₁.sys.sub_master (f₁.rel_cod hr1))]
      · obtain ⟨rfl, rfl⟩ := prodTokNbhd_injective hWeq
        refine Or.inr ⟨X, Y, X' ∩ X'₂, Y' ∩ Y'₂, f₀.inter_right hr0 hr0₂,
          f₁.inter_right hr1 hr1₂, hXne, hYne,
          inter_ne_of_ne_left (B₀.sys.sub_master (f₀.rel_cod hr0)) hX'ne,
          inter_ne_of_ne_left (B₁.sys.sub_master (f₁.rel_cod hr1)) hY'ne, rfl, ?_⟩
        rw [prodTokNbhd_inter]
  mono := by
```

```
    rintro W W'' Z Z' h hWW hZZ' hZmem hZ'mem
    rcases h with ⟨-, rfl⟩ | ⟨X, Y, X', Y', hr0, hr1, hXne, hYne, hX'ne, hY'ne, rfl,
    rfl⟩
    · exact Or.inl ⟨hZmem, Set.Subset.antisymm ((B₀.otimes B₁).sys.sub_master hZ'mem)
    hZZ'⟩
    · rcases hZmem with rfl | ⟨Xz, Yz, hXz, hYz, hXzne, hYzne, rfl⟩
      · obtain ⟨hsubX, -⟩ := prodTokNbhd_subset_iff.mp hWW
        exact absurd (Set.Subset.antisymm (A₀.sys.sub_master (f₀.rel_dom hr0)) hsubX)
    hXne
      · rcases hZ'mem with rfl | ⟨Xz', Yz', hXz', hYz', hXz'ne, hYz'ne, rfl⟩
        · exact Or.inl ⟨otimesTok_mem_prod hXz hYz hXzne hYzne, rfl⟩
        · obtain ⟨hXzX, hYzY⟩ := prodTokNbhd_subset_iff.mp hWW
          obtain ⟨hX'Xz', hY'Yz'⟩ := prodTokNbhd_subset_iff.mp hZZ'
          exact Or.inr ⟨Xz, Yz, Xz', Yz', f₀.mono hr0 hXzX hX'Xz' hXz hXz',
            f₁.mono hr1 hYzY hY'Yz' hYz hYz', hXzne, hYzne, hXz'ne, hYz'ne, rfl, rfl⟩

def GExpr.map : (T : GExpr) → {X Y : ScottSys} → ApproximableMap X.sys Y.sys →
    ApproximableMap (T.obj X).sys (T.obj Y).sys
  | .const D, _, _, _ => idMap D.sys
  | .var, _, _, f => f
  | .sum a b, _, _, f => sumMapTok (a.map f) (b.map f)
  | .prod a b, _, _, f => prodMapTok (a.map f) (b.map f)
  | .oplus a b, _, _, f => oplusMapTok (a.map f) (b.map f)
  | .otimes a b, _, _, f => otimesMapTok (a.map f) (b.map f)

theorem gFun_eq_master : (T : GExpr) → {Γ : Set Str} → (h : Γ.Nonempty) →
    gFun T Γ = (T.obj (singletonSys Γ h)).sys.master
  | .const _, _, _ => rfl
  | .var, _, _ => rfl
  | .sum a b, Γ, h => by
      show insert ([] : Str) (embBit false (gFun a Γ) ∪ embBit true (gFun b Γ))
        = insert ([] : Str) (embBit false ((a.obj (singletonSys Γ h)).sys.master)
            ∪ embBit true ((b.obj (singletonSys Γ h)).sys.master))
      rw [gFun_eq_master a h, gFun_eq_master b h]
  | .prod a b, Γ, h => by
      show insert ([] : Str) (embBit false (gFun a Γ) ∪ embBit true (gFun b Γ))
        = insert ([] : Str) (embBit false ((a.obj (singletonSys Γ h)).sys.master)
            ∪ embBit true ((b.obj (singletonSys Γ h)).sys.master))
      rw [gFun_eq_master a h, gFun_eq_master b h]
  | .oplus a b, Γ, h => by
      show insert ([] : Str) (embBit false (gFun a Γ) ∪ embBit true (gFun b Γ))
        = insert ([] : Str) (embBit false ((a.obj (singletonSys Γ h)).sys.master)
            ∪ embBit true ((b.obj (singletonSys Γ h)).sys.master))
      rw [gFun_eq_master a h, gFun_eq_master b h]
  | .otimes a b, Γ, h => by
      show insert ([] : Str) (embBit false (gFun a Γ) ∪ embBit true (gFun b Γ))
        = insert ([] : Str) (embBit false ((a.obj (singletonSys Γ h)).sys.master)
            ∪ embBit true ((b.obj (singletonSys Γ h)).sys.master))
      rw [gFun_eq_master a h, gFun_eq_master b h]

theorem gFun_mono (T : GExpr) {Γ Γ' : Set Str} (h : Γ ⊆ Γ') : gFun T Γ ⊆ gFun T Γ' :=
    by
  induction T with
  | const C => exact subset_rfl
  | var => exact h
  | sum a b ih₀ ih₁ => exact insertTag_mono ih₀ ih₁
```

```
  | prod a b ih₀ ih₁ => exact insertTag_mono ih₀ ih₁
  | oplus a b ih₀ ih₁ => exact insertTag_mono ih₀ ih₁
  | otimes a b ih₀ ih₁ => exact insertTag_mono ih₀ ih₁

theorem gFun_continuous (T : GExpr) {? : Set (Set Str)} {U : Set Str}
    (_hdir : DirectedOn (· ⊆ ·) ?) (hne : ?.Nonempty)
    (hU : ∀ w, w ∈ U ↔ ∃ Γ ∈ ?, w ∈ Γ) :
    ∀ w, w ∈ gFun T U ↔ ∃ Γ ∈ ?, w ∈ gFun T Γ := by
  induction T with
  | const C =>
      intro w
      exact ⟨fun hw => let ⟨Γ, hΓ⟩ := hne; ⟨Γ, hΓ, hw⟩, fun ⟨_, _, hw⟩ => hw⟩
  | var => intro w; exact hU w
  | sum a b ih₀ ih₁ => intro w; exact insertTag_continuous hne ih₀ ih₁ w
  | prod a b ih₀ ih₁ => intro w; exact insertTag_continuous hne ih₀ ih₁ w
  | oplus a b ih₀ ih₁ => intro w; exact insertTag_continuous hne ih₀ ih₁ w
  | otimes a b ih₀ ih₁ => intro w; exact insertTag_continuous hne ih₀ ih₁ w

theorem gFun_nil_mem : ∀ (T : GExpr), T.RootedConst → {Γ : Set Str} →
    ([] : Str) ∈ Γ → ([] : Str) ∈ gFun T Γ
  | .const _, hC, _, _ => hC
  | .var, _, _, hΓ => hΓ
  | .sum _ _, _, _, _ => Set.mem_insert _ _
  | .prod _ _, _, _, _ => Set.mem_insert _ _
  | .oplus _ _, _, _, _ => Set.mem_insert _ _
  | .otimes _ _, _, _, _ => Set.mem_insert _ _

theorem nil_mem_gIter (T : GExpr) (hT : T.RootedConst) : ∀ n, ([] : Str) ∈ gIter T n
  | 0 => rfl
  | n + 1 => gFun_nil_mem T hT (nil_mem_gIter T hT n)

theorem gIter_mono_step (T : GExpr) (hT : T.RootedConst) :
    ∀ n, gIter T n ⊆ gIter T (n + 1)
  | 0 => by
      intro w hw


      have hw' : w = [] := hw
      subst hw'
      exact gFun_nil_mem T hT rfl
  | n + 1 => gFun_mono T (gIter_mono_step T hT n)

theorem gIter_mono (T : GExpr) (hT : T.RootedConst) {m n : ℕ} (hmn : m ≤ n) :
    gIter T m ⊆ gIter T n := by
  induction hmn with
  | refl => exact subset_rfl
  | step _ ih => intro x hx; exact gIter_mono_step T hT _ (ih hx)

theorem gFun_iter_fixed (T : GExpr) (hT : T.RootedConst) :
    gFun T (⋃ n, gIter T n) = ⋃ n, gIter T n := by
  have hstep := gIter_mono_step T hT
  have hne : (Set.range (gIter T)).Nonempty := ⟨gIter T 0, 0, rfl⟩
  have hdir : DirectedOn (· ⊆ ·) (Set.range (gIter T)) := by
    rintro _ ⟨i, rfl⟩ _ ⟨j, rfl⟩
    exact ⟨gIter T (max i j), ⟨max i j, rfl⟩,
      gIter_mono T hT (le_max_left i j), gIter_mono T hT (le_max_right i j)⟩
  have hU : ∀ v, v ∈ (⋃ n, gIter T n) ↔ ∃ S ∈ Set.range (gIter T), v ∈ S := by
```

```
    intro v
    constructor
    · intro hv; rw [Set.mem_iUnion] at hv; obtain ⟨n, hn⟩ := hv
      exact ⟨gIter T n, ⟨n, rfl⟩, hn⟩
    · rintro ⟨S, ⟨n, rfl⟩, hv⟩; exact Set.mem_iUnion.mpr ⟨n, hv⟩
  apply Set.ext; intro w
  rw [gFun_continuous T hdir hne hU w]
  constructor
  · rintro ⟨S, ⟨n, rfl⟩, hwS⟩; exact Set.mem_iUnion.mpr ⟨n + 1, hwS⟩
  · intro hw
    rw [Set.mem_iUnion] at hw; obtain ⟨n, hn⟩ := hw
    exact ⟨gIter T n, ⟨n, rfl⟩, hstep n hn⟩

theorem gExists_tok_fixedPoint (T : GExpr) (hT : T.RootedConst) :
    ∃ Γ : Set Str, ([] : Str) ∈ Γ ∧ gFun T Γ = Γ :=
  ⟨⋃ n, gIter T n, Set.mem_iUnion.mpr ⟨0, nil_mem_gIter T hT 0⟩, gFun_iter_fixed T hT⟩

theorem gExists_singleton_subsystem (T : GExpr) (hT : T.RootedConst) :
    ∃ (Γ : Set Str) (h : Γ.Nonempty),
      (singletonSys Γ h).sys ? (T.obj (singletonSys Γ h)).sys := by
  obtain ⟨Γ, hnil, hfix⟩ := gExists_tok_fixedPoint T hT
  have hne : Γ.Nonempty := ⟨[], hnil⟩
  have hmaster : (T.obj (singletonSys Γ hne)).sys.master = Γ :=
    (gFun_eq_master T hne).symm.trans hfix
  refine ⟨Γ, hne, ?_, ?_, ?_⟩
  · exact hmaster.symm
  · intro X hX
    have heq : X = (T.obj (singletonSys Γ hne)).sys.master := (hX : X = Γ).trans
    hmaster.symm
    rw [heq]
    exact (T.obj (singletonSys Γ hne)).sys.master_mem
  · intro X Y hX hY _
    show X ∩ Y = Γ
    rw [show X = Γ from hX, show Y = Γ from hY, Set.inter_self]

end Exercise619
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise619
section
set_option linter.unusedVariables false

theorem example_621 : And
  (∀ (T : DomainTheory.NeighbourhoodSystems.Exercise619.GExpr),
    T.RootedConst →
      ∃ (Γ : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str) (h :
        @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str Γ),
        @DomainTheory.NeighbourhoodSystems.Subsystem DomainTheory.NeighbourhoodSystems
    .ExampleB.Str
          (DomainTheory.NeighbourhoodSystems.Exercise619.singletonSys Γ h).sys
          (T.obj (DomainTheory.NeighbourhoodSystems.Exercise619.singletonSys Γ h)).sys
    )
  (∀ (T : DomainTheory.NeighbourhoodSystems.Exercise619.GExpr),
    T.RootedConst →
      ∃ (Γ : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
```

```
        And
          (@Membership.mem (List Bool) (Set DomainTheory.NeighbourhoodSystems.ExampleB
    .Str)
            (@Set.instMembership DomainTheory.NeighbourhoodSystems.ExampleB.Str) Γ (
    @List.nil Bool))
          (@Eq (Set DomainTheory.NeighbourhoodSystems.ExampleB.Str)
            (DomainTheory.NeighbourhoodSystems.Exercise619.gFun T Γ) Γ)) :=
  @And.intro
  (∀ (T : DomainTheory.NeighbourhoodSystems.Exercise619.GExpr),
    T.RootedConst →
      ∃ (Γ : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str) (h :
        @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str Γ),
        @DomainTheory.NeighbourhoodSystems.Subsystem DomainTheory.NeighbourhoodSystems
    .ExampleB.Str
          (DomainTheory.NeighbourhoodSystems.Exercise619.singletonSys Γ h).sys
          (T.obj (DomainTheory.NeighbourhoodSystems.Exercise619.singletonSys Γ h)).sys
    )
  (∀ (T : DomainTheory.NeighbourhoodSystems.Exercise619.GExpr),
    T.RootedConst →
      ∃ (Γ : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
        And
          (@Membership.mem (List Bool) (Set DomainTheory.NeighbourhoodSystems.ExampleB
    .Str)
            (@Set.instMembership DomainTheory.NeighbourhoodSystems.ExampleB.Str) Γ (
    @List.nil Bool))
          (@Eq (Set DomainTheory.NeighbourhoodSystems.ExampleB.Str)
            (DomainTheory.NeighbourhoodSystems.Exercise619.gFun T Γ) Γ))
  DomainTheory.NeighbourhoodSystems.Exercise619.gExists_singleton_subsystem
  DomainTheory.NeighbourhoodSystems.Exercise619.gExists_tok_fixedPoint
end

end DomainTheory.NeighbourhoodSystems.Exercise619
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise619
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB
open DomainTheory.NeighbourhoodSystems.Exercise510

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

variable {A₀ A₁ B₀ B₁ : ScottSys}

variable {C₀ C₁ : ScottSys}

theorem GExpr.naryOp_rootedConst {op : GExpr → GExpr → GExpr}
    (hop : ∀ x y, (op x y).RootedConst ↔ x.RootedConst ∧ y.RootedConst) :
    ∀ (a : GExpr) (l : List GExpr), a.RootedConst → (∀ b ∈ l, b.RootedConst) →
      (GExpr.naryOp op a l).RootedConst
  | a, [], ha, _ => ha
  | a, b :: l, ha, hl => by
      rw [GExpr.naryOp, hop]
```

```
      exact ⟨ha, GExpr.naryOp_rootedConst hop b l (hl b (List.mem_cons_self ..))
        (fun c hc => hl c (List.mem_cons_of_mem _ hc))⟩

end Exercise619
end

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}

theorem inter_ne_of_ne_right {X X' Δ : Set Str} (hX' : X' ⊆ Δ) (hne : X' = Δ) : X ∩ X
    ' = Δ := by
  intro h
  exact hne (Set.Subset.antisymm hX' (by rw [← h]; exact Set.inter_subset_right))

end Exercise619
end

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

variable {A₀ A₁ B₀ B₁ : ScottSys}

variable {C₀ C₁ : ScottSys}

theorem naryOplus_singleton_subsystem (a : GExpr) (l : List GExpr)
    (ha : a.RootedConst) (hl : ∀ b ∈ l, b.RootedConst) :
    ∃ (Γ : Set Str) (h : Γ.Nonempty),
      (singletonSys Γ h).sys ? ((GExpr.naryOplus a l).obj (singletonSys Γ h)).sys :=
  gExists_singleton_subsystem _ (GExpr.naryOp_rootedConst (fun _ _ => Iff.rfl) a l ha
    hl)

theorem naryOtimes_singleton_subsystem (a : GExpr) (l : List GExpr)
    (ha : a.RootedConst) (hl : ∀ b ∈ l, b.RootedConst) :
    ∃ (Γ : Set Str) (h : Γ.Nonempty),
      (singletonSys Γ h).sys ? ((GExpr.naryOtimes a l).obj (singletonSys Γ h)).sys :=
  gExists_singleton_subsystem _ (GExpr.naryOp_rootedConst (fun _ _ => Iff.rfl) a l ha
    hl)

theorem naryProd_singleton_subsystem (a : GExpr) (l : List GExpr)
    (ha : a.RootedConst) (hl : ∀ b ∈ l, b.RootedConst) :
    ∃ (Γ : Set Str) (h : Γ.Nonempty),
      (singletonSys Γ h).sys ? ((GExpr.naryProd a l).obj (singletonSys Γ h)).sys :=
  gExists_singleton_subsystem _ (GExpr.naryOp_rootedConst (fun _ _ => Iff.rfl) a l ha
    hl)

theorem narySum_singleton_subsystem (a : GExpr) (l : List GExpr)
    (ha : a.RootedConst) (hl : ∀ b ∈ l, b.RootedConst) :
    ∃ (Γ : Set Str) (h : Γ.Nonempty),
      (singletonSys Γ h).sys ? ((GExpr.narySum a l).obj (singletonSys Γ h)).sys :=
  gExists_singleton_subsystem _ (GExpr.naryOp_rootedConst (fun _ _ => Iff.rfl) a l ha
```

```
    hl)

theorem oplusMapTok_comp (f₀ : ApproximableMap A₀.sys B₀.sys) (f₁ : ApproximableMap A₁.
    sys B₁.sys)
    {g₀ : ApproximableMap B₀.sys C₀.sys} {g₁ : ApproximableMap B₁.sys C₁.sys}
    (hg₀ : IsStrict g₀) (hg₁ : IsStrict g₁) :
    oplusMapTok (g₀.comp f₀) (g₁.comp f₁) = (oplusMapTok g₀ g₁).comp (oplusMapTok f₀ f₁)
     := by
  apply ApproximableMap.ext
  intro W W''
  constructor
  · rintro (⟨hW, rfl⟩ | ⟨X, X'', ⟨X', hf, hg⟩, hXne, hX''ne, rfl, rfl⟩ |
      ⟨Y, Y'', ⟨Y', hf, hg⟩, hYne, hY''ne, rfl, rfl⟩)
    · exact ⟨sumTokMaster B₀.sys B₁.sys, Or.inl ⟨hW, rfl⟩,
        Or.inl ⟨(B₀.oplus B₁).sys.master_mem, rfl⟩⟩
    · have hX'ne : X' = B₀.sys.master := fun h => hX''ne (hg₀ (h ▶ hg))
      exact ⟨embBit false X', Or.inr (Or.inl ⟨X, X', hf, hXne, hX'ne, rfl, rfl⟩),
        Or.inr (Or.inl ⟨X', X'', hg, hX'ne, hX''ne, rfl, rfl⟩)⟩
    · have hY'ne : Y' = B₁.sys.master := fun h => hY''ne (hg₁ (h ▶ hg))
      exact ⟨embBit true Y', Or.inr (Or.inr ⟨Y, Y', hf, hYne, hY'ne, rfl, rfl⟩),
        Or.inr (Or.inr ⟨Y', Y'', hg, hY'ne, hY''ne, rfl, rfl⟩)⟩
  · rintro ⟨W', hWW', hW'W''⟩
    rcases hWW' with ⟨hW, rfl⟩ | ⟨X, X', hf, hXne, hX'ne, rfl, rfl⟩ | ⟨Y, Y', hf, hYne,
    hY'ne, rfl, rfl⟩
    · rcases hW'W'' with ⟨-, rfl⟩ | ⟨X, X', -, -, -, heq, -⟩ | ⟨Y, Y', -, -, -, heq, -⟩
      · exact Or.inl ⟨hW, rfl⟩
      · exact absurd (heq ▶ nil_mem_sumTokMaster) nil_not_mem_embBit
      · exact absurd (heq ▶ nil_mem_sumTokMaster) nil_not_mem_embBit
    · rcases hW'W'' with ⟨-, rfl⟩ | ⟨X₂, X'', hg, -, hX''ne, heq, rfl⟩ | ⟨Y₂, Y'', hg, -,
     -, heq, -⟩
      · exact Or.inl ⟨oplusTok_mem_embF (h₀ := A₀.ne) (h₁ := A₁.ne) (f₀.rel_dom hf) hXne,
     rfl⟩
      · obtain rfl := embBit_injective heq
        exact Or.inr (Or.inl ⟨X, X'', ⟨X', hf, hg⟩, hXne, hX''ne, rfl, rfl⟩)
      · exact absurd heq (embBit_ne (by decide) (B₀.ne X' (f₀.rel_cod hf)))
    · rcases hW'W'' with ⟨-, rfl⟩ | ⟨X₂, X'', hg, -, -, heq, -⟩ | ⟨Y₂, Y'', hg, -, hY''ne
    , heq, rfl⟩
      · exact Or.inl ⟨oplusTok_mem_embT (h₀ := A₀.ne) (h₁ := A₁.ne) (f₁.rel_dom hf) hYne,
     rfl⟩
      · exact absurd heq (embBit_ne (by decide) (B₁.ne Y' (f₁.rel_cod hf)))
      · obtain rfl := embBit_injective heq
        exact Or.inr (Or.inr ⟨Y, Y'', ⟨Y', hf, hg⟩, hYne, hY''ne, rfl, rfl⟩)

theorem oplusMapTok_id :
    oplusMapTok (idMap A₀.sys) (idMap A₁.sys) = idMap (A₀.oplus A₁).sys := by
  apply ApproximableMap.ext
  intro W W'
  constructor
  · rintro (⟨hW, rfl⟩ | ⟨X, X', ⟨hX, hX', hsub⟩, hXne, hX'ne, rfl, rfl⟩ |
      ⟨Y, Y', ⟨hY, hY', hsub⟩, hYne, hY'ne, rfl, rfl⟩)
    · exact ⟨hW, (A₀.oplus A₁).sys.master_mem, (A₀.oplus A₁).sys.sub_master hW⟩
    · exact ⟨oplusTok_mem_embF (h₀ := A₀.ne) (h₁ := A₁.ne) hX hXne,
        oplusTok_mem_embF (h₀ := A₀.ne) (h₁ := A₁.ne) hX' hX'ne, embBit_subset.mpr hsub⟩
    · exact ⟨oplusTok_mem_embT (h₀ := A₀.ne) (h₁ := A₁.ne) hY hYne,
        oplusTok_mem_embT (h₀ := A₀.ne) (h₁ := A₁.ne) hY' hY'ne, embBit_subset.mpr hsub⟩
  · rintro ⟨hW, hW', hsub⟩
```

```
    rcases hW' with rfl | ⟨X', hX', hX'ne, rfl⟩ | ⟨Y', hY', hY'ne, rfl⟩
    · exact Or.inl ⟨hW, rfl⟩
    · rcases hW with rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩
      · exact absurd (hsub nil_mem_sumTokMaster) nil_not_mem_embBit
      · exact Or.inr (Or.inl ⟨X, X', ⟨hX, hX', embBit_subset.mp hsub⟩, hXne, hX'ne, rfl,
     rfl⟩)
      · exact absurd hsub (fun h => embBit_not_subset_cross (by decide) (A₁.ne Y hY) h)
    · rcases hW with rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩
      · exact absurd (hsub nil_mem_sumTokMaster) nil_not_mem_embBit
      · exact absurd hsub (fun h => embBit_not_subset_cross (by decide) (A₀.ne X hX) h)
      · exact Or.inr (Or.inr ⟨Y, Y', ⟨hY, hY', embBit_subset.mp hsub⟩, hYne, hY'ne, rfl,
     rfl⟩)

theorem oplusMapTok_isStrict (f₀ : ApproximableMap A₀.sys B₀.sys)
    (f₁ : ApproximableMap A₁.sys B₁.sys) : IsStrict (oplusMapTok f₀ f₁) := by
  rintro Y (⟨-, rfl⟩ | ⟨X, X', -, -, -, heq, -⟩ | ⟨Y0, Y', -, -, -, heq, -⟩)
  · rfl
  · have heq' : sumTokMaster A₀.sys A₁.sys = embBit false X := heq
    exact absurd (heq' ▸ nil_mem_sumTokMaster) nil_not_mem_embBit
  · have heq' : sumTokMaster A₀.sys A₁.sys = embBit true Y0 := heq
    exact absurd (heq' ▸ nil_mem_sumTokMaster) nil_not_mem_embBit

theorem oplusMapTok_mono {f₀ f₀' : ApproximableMap A₀.sys B₀.sys}
    {f₁ f₁' : ApproximableMap A₁.sys B₁.sys} (h0 : f₀ ≤ f₀') (h1 : f₁ ≤ f₁') :
    oplusMapTok f₀ f₁ ≤ oplusMapTok f₀' f₁' := by
  rw [ApproximableMap.le_iff]
  rintro W W' (⟨hW, rfl⟩ | ⟨X, X', hrel, hXne, hX'ne, rfl, rfl⟩ |
    ⟨Y, Y', hrel, hYne, hY'ne, rfl, rfl⟩)
  · exact Or.inl ⟨hW, rfl⟩
  · exact Or.inr (Or.inl ⟨X, X', h0 X X' hrel, hXne, hX'ne, rfl, rfl⟩)
  · exact Or.inr (Or.inr ⟨Y, Y', h1 Y Y' hrel, hYne, hY'ne, rfl, rfl⟩)

end Exercise619
end

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

theorem oplusTok_mem_embF_inv {W : Set Str} (h : (oplusTok D₀ D₁ h₀ h₁).mem (embBit
    false W)) :
    D₀.mem W := by
  rcases h with h0 | ⟨X, hX, -, heq⟩ | ⟨Y, hY, -, heq⟩
  · exact absurd (h0.symm ▸ nil_mem_sumTokMaster) nil_not_mem_embBit
  · rw [embBit_injective heq]; exact hX
  · exact absurd heq.symm (embBit_ne (show (true : Bool) = false by decide) (h₁ Y hY))

theorem oplusTok_mem_embT_inv {W : Set Str} (h : (oplusTok D₀ D₁ h₀ h₁).mem (embBit
    true W)) :
    D₁.mem W := by
  rcases h with h0 | ⟨X, hX, -, heq⟩ | ⟨Y, hY, -, heq⟩
  · exact absurd (h0.symm ▸ nil_mem_sumTokMaster) nil_not_mem_embBit
  · exact absurd heq.symm (embBit_ne (show (false : Bool) = true by decide) (h₀ X hX))
```

```
  · rw [embBit_injective heq]; exact hY

theorem oplusTok_mem_master : (oplusTok D₀ D₁ h₀ h₁).mem (sumTokMaster D₀ D₁) := Or.inl
    rfl

end Exercise619
end

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

variable {A₀ A₁ B₀ B₁ : ScottSys}

theorem oplusTok_subsystem (h0 : A₀.sys ? B₀.sys) (h1 : A₁.sys ? B₁.sys) :
    (A₀.oplus A₁).sys ? (B₀.oplus B₁).sys := by
  have heqm : sumTokMaster A₀.sys A₁.sys = sumTokMaster B₀.sys B₁.sys := by
    unfold sumTokMaster; rw [h0.master_eq, h1.master_eq]
  refine ⟨heqm, ?_, ?_⟩
  · rintro W (rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩)
    · exact Or.inl heqm
    · exact Or.inr (Or.inl ⟨X, h0.sub hX, h0.master_eq ▸ hXne, rfl⟩)
    · exact Or.inr (Or.inr ⟨Y, h1.sub hY, h1.master_eq ▸ hYne, rfl⟩)
  · rintro W W' (rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩)
      (rfl | ⟨X', hX', hX'ne, rfl⟩ | ⟨Y', hY', hY'ne, rfl⟩) hInt
    · rw [Set.inter_self]; exact Or.inl rfl
    · rw [sumTokMaster_inter_embF hX']; exact Or.inr (Or.inl ⟨X', hX', hX'ne, rfl⟩)
    · rw [sumTokMaster_inter_embT hY']; exact Or.inr (Or.inr ⟨Y', hY', hY'ne, rfl⟩)
    · rw [Set.inter_comm, sumTokMaster_inter_embF hX]; exact Or.inr (Or.inl ⟨X, hX,
    hXne, rfl⟩)
    · rw [embBit_inter] at hInt ⊢
      exact Or.inr (Or.inl ⟨X ∩ X',
        h0.inter_closed hX hX' (oplusTok_mem_embF_inv (h₀ := B₀.ne) (h₁ := B₁.ne) hInt)
    ,
        inter_ne_of_ne_left (A₀.sys.sub_master hX) hXne, rfl⟩)
    · rw [embBit_inter_ne (show (false : Bool) = true by decide)] at hInt
      exact absurd ((B₀.oplus B₁).ne _ hInt) Set.not_nonempty_empty
    · rw [Set.inter_comm, sumTokMaster_inter_embT hY]; exact Or.inr (Or.inr ⟨Y, hY,
    hYne, rfl⟩)
    · rw [embBit_inter_ne (show (true : Bool) = false by decide)] at hInt
      exact absurd ((B₀.oplus B₁).ne _ hInt) Set.not_nonempty_empty
    · rw [embBit_inter] at hInt ⊢
      exact Or.inr (Or.inr ⟨Y ∩ Y',
        h1.inter_closed hY hY' (oplusTok_mem_embT_inv (h₀ := B₀.ne) (h₁ := B₁.ne) hInt)
    ,
        inter_ne_of_ne_left (A₁.sys.sub_master hY) hYne, rfl⟩)

end Exercise619
end

section
namespace Exercise619
```

```
variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

variable {A₀ A₁ B₀ B₁ : ScottSys}

variable {C₀ C₁ : ScottSys}

theorem otimesMapTok_comp (f₀ : ApproximableMap A₀.sys B₀.sys) (f₁ : ApproximableMap A₁.
    sys B₁.sys)
    {g₀ : ApproximableMap B₀.sys C₀.sys} {g₁ : ApproximableMap B₁.sys C₁.sys}
    (hg₀ : IsStrict g₀) (hg₁ : IsStrict g₁) :
    otimesMapTok (g₀.comp f₀) (g₁.comp f₁) = (otimesMapTok g₀ g₁).comp (otimesMapTok f₀
    f₁) := by
  apply ApproximableMap.ext
  intro W W''
  constructor
  · rintro (⟨hW, rfl⟩ | ⟨X, Y, X'', Y'', ⟨X', hf0, hg0⟩, ⟨Y', hf1, hg1⟩,
      hXne, hYne, hX''ne, hY''ne, rfl, rfl⟩)
    · exact ⟨prodTokNbhd B₀.sys.master B₁.sys.master, Or.inl ⟨hW, rfl⟩,
        Or.inl ⟨(B₀.otimes B₁).sys.master_mem, rfl⟩⟩
    · have hX'ne : X' = B₀.sys.master := fun h => hX''ne (hg₀ (h ▶ hg0))
      have hY'ne : Y' = B₁.sys.master := fun h => hY''ne (hg₁ (h ▶ hg1))
      exact ⟨prodTokNbhd X' Y',
        Or.inr ⟨X, Y, X', Y', hf0, hf1, hXne, hYne, hX'ne, hY'ne, rfl, rfl⟩,
        Or.inr ⟨X', Y', X'', Y'', hg0, hg1, hX'ne, hY'ne, hX''ne, hY''ne, rfl, rfl⟩⟩
  · rintro ⟨W', hWW', hW'W''⟩
    rcases hWW' with ⟨hW, rfl⟩ | ⟨X, Y, X', Y', hf0, hf1, hXne, hYne, hX'ne, hY'ne, rfl
    , rfl⟩
    · rcases hW'W'' with ⟨-, rfl⟩ | ⟨Xg, Yg, X'', Y'', -, -, hXgne, -, -, -, heq, -⟩
      · exact Or.inl ⟨hW, rfl⟩
      · have heq' : prodTokNbhd B₀.sys.master B₁.sys.master = prodTokNbhd Xg Yg := heq
        obtain ⟨h, -⟩ := prodTokNbhd_injective heq'
        exact absurd h.symm hXgne
    · rcases hW'W'' with ⟨-, rfl⟩ |
        ⟨Xg, Yg, X'', Y'', hg0, hg1, hXgne, hYgne, hX''ne, hY''ne, heq, rfl⟩
      · exact Or.inl ⟨otimesTok_mem_prod (f₀.rel_dom hf0) (f₁.rel_dom hf1) hXne hYne,
    rfl⟩
      · obtain ⟨rfl, rfl⟩ := prodTokNbhd_injective heq
        exact Or.inr ⟨X, Y, X'', Y'', ⟨X', hf0, hg0⟩, ⟨Y', hf1, hg1⟩,
          hXne, hYne, hX''ne, hY''ne, rfl, rfl⟩

theorem otimesMapTok_id :
    otimesMapTok (idMap A₀.sys) (idMap A₁.sys) = idMap (A₀.otimes A₁).sys := by
  apply ApproximableMap.ext
  intro W W'
  constructor
  · rintro (⟨hW, rfl⟩ | ⟨X, Y, X', Y', ⟨hX, hX', hsubX⟩, ⟨hY, hY', hsubY⟩,
      hXne, hYne, hX'ne, hY'ne, rfl, rfl⟩)
    · exact ⟨hW, (A₀.otimes A₁).sys.master_mem, (A₀.otimes A₁).sys.sub_master hW⟩
    · exact ⟨otimesTok_mem_prod hX hY hXne hYne, otimesTok_mem_prod hX' hY' hX'ne hY'ne
    ,
        prodTokNbhd_subset_iff.mpr ⟨hsubX, hsubY⟩⟩
  · rintro ⟨hW, hW', hsub⟩
    rcases hW' with rfl | ⟨X', Y', hX', hY', hX'ne, hY'ne, rfl⟩
    · exact Or.inl ⟨hW, rfl⟩
```

```
    · rcases hW with rfl | ⟨X, Y, hX, hY, hXne, hYne, rfl⟩
      · obtain ⟨hsubX, -⟩ := prodTokNbhd_subset_iff.mp hsub
        exact absurd (Set.Subset.antisymm (A₀.sys.sub_master hX') hsubX) hX'ne
      · obtain ⟨hsX, hsY⟩ := prodTokNbhd_subset_iff.mp hsub
        exact Or.inr ⟨X, Y, X', Y', ⟨hX, hX', hsX⟩, ⟨hY, hY', hsY⟩,
          hXne, hYne, hX'ne, hY'ne, rfl, rfl⟩

theorem GExpr.map_id : (T : GExpr) → (X : ScottSys) → T.map (idMap X.sys) = idMap (T.
    obj X).sys
  | .const _, _ => rfl
  | .var, _ => rfl
  | .sum a b, X => by
      show sumMapTok (a.map (idMap X.sys)) (b.map (idMap X.sys)) = idMap ((a.obj X).
    sum (b.obj X)).sys
      rw [a.map_id X, b.map_id X, sumMapTok_id]
  | .prod a b, X => by
      show prodMapTok (a.map (idMap X.sys)) (b.map (idMap X.sys)) = idMap ((a.obj X).
    prod (b.obj X)).sys
      rw [a.map_id X, b.map_id X, prodMapTok_id]
  | .oplus a b, X => by
      show oplusMapTok (a.map (idMap X.sys)) (b.map (idMap X.sys))
          = idMap ((a.obj X).oplus (b.obj X)).sys
      rw [a.map_id X, b.map_id X, oplusMapTok_id]
  | .otimes a b, X => by
      show otimesMapTok (a.map (idMap X.sys)) (b.map (idMap X.sys))
          = idMap ((a.obj X).otimes (b.obj X)).sys
      rw [a.map_id X, b.map_id X, otimesMapTok_id]



theorem otimesMapTok_isStrict (f₀ : ApproximableMap A₀.sys B₀.sys)
    (f₁ : ApproximableMap A₁.sys B₁.sys) : IsStrict (otimesMapTok f₀ f₁) := by
  rintro Y (⟨-, rfl⟩ | ⟨X, Y0, X', Y', -, -, hXne, -, -, -, heq, -⟩)
  · rfl
  · have heq' : prodTokNbhd A₀.sys.master A₁.sys.master = prodTokNbhd X Y0 := heq
    obtain ⟨h, -⟩ := prodTokNbhd_injective heq'
    exact absurd h.symm hXne

theorem GExpr.map_isStrict : (T : GExpr) → {X Y : ScottSys} → (f : ApproximableMap X.
    sys Y.sys) →
    IsStrict f → IsStrict (T.map f)
  | .const _, _, _, _, _ => isStrict_idMap
  | .var, _, _, _, hf => hf
  | .sum a b, _, _, f, _ => sumMapTok_isStrict (a.map f) (b.map f)
  | .prod a b, _, _, f, hf => prodMapTok_isStrict (a.map_isStrict f hf) (b.
    map_isStrict f hf)
  | .oplus a b, _, _, f, _ => oplusMapTok_isStrict (a.map f) (b.map f)
  | .otimes a b, _, _, f, _ => otimesMapTok_isStrict (a.map f) (b.map f)

theorem GExpr.map_comp : (T : GExpr) → {X Y Z : ScottSys} → (f : ApproximableMap X.
    sys Y.sys) →
    {g : ApproximableMap Y.sys Z.sys} → IsStrict g → T.map (g.comp f) = (T.map g).
    comp (T.map f)
  | .const D, _, _, _, _, _, _ => (idMap_comp (idMap D.sys)).symm
  | .var, _, _, _, _, _, _ => rfl
  | .sum a b, _, _, _, f, g, hg => by
      show sumMapTok (a.map (g.comp f)) (b.map (g.comp f))
```

```
          = (sumMapTok (a.map g) (b.map g)).comp (sumMapTok (a.map f) (b.map f))
      rw [a.map_comp f hg, b.map_comp f hg]
      · exact sumMapTok_comp _ _ _ _
  | .prod a b, _, _, _, f, g, hg => by
      show prodMapTok (a.map (g.comp f)) (b.map (g.comp f))
          = (prodMapTok (a.map g) (b.map g)).comp (prodMapTok (a.map f) (b.map f))
      rw [a.map_comp f hg, b.map_comp f hg]
      · exact prodMapTok_comp _ _ _ _
  | .oplus a b, _, _, _, f, g, hg => by
      show oplusMapTok (a.map (g.comp f)) (b.map (g.comp f))
          = (oplusMapTok (a.map g) (b.map g)).comp (oplusMapTok (a.map f) (b.map f))
      rw [a.map_comp f hg, b.map_comp f hg]
      · exact oplusMapTok_comp _ _ (a.map_isStrict g hg) (b.map_isStrict g hg)
  | .otimes a b, _, _, _, f, g, hg => by
      show otimesMapTok (a.map (g.comp f)) (b.map (g.comp f))
          = (otimesMapTok (a.map g) (b.map g)).comp (otimesMapTok (a.map f) (b.map f))
      rw [a.map_comp f hg, b.map_comp f hg]
      · exact otimesMapTok_comp _ _ (a.map_isStrict g hg) (b.map_isStrict g hg)

theorem otimesMapTok_mono {f₀ f₀' : ApproximableMap A₀.sys B₀.sys}
    {f₁ f₁' : ApproximableMap A₁.sys B₁.sys} (h0 : f₀ ≤ f₀') (h1 : f₁ ≤ f₁') :
    otimesMapTok f₀ f₁ ≤ otimesMapTok f₀' f₁' := by
  rw [ApproximableMap.le_iff]
  rintro W W' (⟨hW, rfl⟩ | ⟨X, Y, X', Y', hr0, hr1, hXne, hYne, hX'ne, hY'ne, rfl, rfl⟩)
  · exact Or.inl ⟨hW, rfl⟩
  · exact Or.inr ⟨X, Y, X', Y', h0 X X' hr0, h1 Y Y' hr1, hXne, hYne, hX'ne, hY'ne, rfl
    , rfl⟩

theorem GExpr.map_mono : (T : GExpr) → {X Y : ScottSys} → {f f' : ApproximableMap X.
    sys Y.sys} →
    f ≤ f' → T.map f ≤ T.map f'
  | .const _, _, _, _, _, _ => le_rfl
  | .var, _, _, _, _, h => h
  | .sum a b, _, _, _, _, h => sumMapTok_mono (a.map_mono h) (b.map_mono h)
  | .prod a b, _, _, _, _, h => prodMapTok_mono (a.map_mono h) (b.map_mono h)
  | .oplus a b, _, _, _, _, h => oplusMapTok_mono (a.map_mono h) (b.map_mono h)
  | .otimes a b, _, _, _, _, h => otimesMapTok_mono (a.map_mono h) (b.map_mono h)

theorem GExpr.map_continuous_mp : (T : GExpr) → {I : Type} → {X Y : ScottSys} →
    {g : I → ApproximableMap X.sys Y.sys} → {f : ApproximableMap X.sys Y.sys} →
    [Nonempty I] → (∀ i j, ∃ k, g i ≤ g k ∧ g j ≤ g k) →
    (∀ A B, f.rel A B ↔ ∃ i, (g i).rel A B) →
    {A B : Set Str} → (T.map f).rel A B → ∃ i, (T.map (g i)).rel A B
  | .const _, _, _, _, _, _, _, _, _, _, _, hrel => by
      obtain ⟨i⟩ := ?Nonempty _?; exact ⟨i, hrel⟩
  | .var, _, _, _, _, _, _, hf, A, B, hrel => (hf A B).mp hrel
  | .sum a b, _, _, _, _, _, _, hdir, hf, _, _, hrel => by
      rcases hrel with ⟨hA, rfl⟩ | ⟨P, P', hr, rfl, rfl⟩ | ⟨Q, Q', hr, rfl, rfl⟩
      · obtain ⟨i⟩ := ?Nonempty _?; exact ⟨i, Or.inl ⟨hA, rfl⟩⟩
      · obtain ⟨i, hi⟩ := a.map_continuous_mp hdir hf hr
        exact ⟨i, Or.inr (Or.inl ⟨P, P', hi, rfl, rfl⟩)⟩
      · obtain ⟨i, hi⟩ := b.map_continuous_mp hdir hf hr
        exact ⟨i, Or.inr (Or.inr ⟨Q, Q', hi, rfl, rfl⟩)⟩
  | .prod a b, _, _, _, _, _, _, hdir, hf, _, _, hrel => by
      obtain ⟨P, Q, P', Q', hr0, hr1, rfl, rfl⟩ := hrel
      obtain ⟨i, hi⟩ := a.map_continuous_mp hdir hf hr0
```

```
      obtain ⟨j, hj⟩ := b.map_continuous_mp hdir hf hr1
      obtain ⟨k, hik, hjk⟩ := hdir i j
      exact ⟨k, P, Q, P', Q', (a.map_mono hik) P P' hi, (b.map_mono hjk) Q Q' hj, rfl,
    rfl⟩
  | .oplus a b, _, _, _, _, _, _, hdir, hf, _, _, hrel => by
      rcases hrel with ⟨hA, rfl⟩ | ⟨P, P', hr, hPne, hP'ne, rfl, rfl⟩ |
        ⟨Q, Q', hr, hQne, hQ'ne, rfl, rfl⟩
      · obtain ⟨i⟩ := ?Nonempty _?; exact ⟨i, Or.inl ⟨hA, rfl⟩⟩
      · obtain ⟨i, hi⟩ := a.map_continuous_mp hdir hf hr
        exact ⟨i, Or.inr (Or.inl ⟨P, P', hi, hPne, hP'ne, rfl, rfl⟩)⟩
      · obtain ⟨i, hi⟩ := b.map_continuous_mp hdir hf hr
        exact ⟨i, Or.inr (Or.inr ⟨Q, Q', hi, hQne, hQ'ne, rfl, rfl⟩)⟩
  | .otimes a b, _, _, _, _, _, _, hdir, hf, _, _, hrel => by
      rcases hrel with ⟨hA, rfl⟩ | ⟨P, Q, P', Q', hr0, hr1, hPne, hQne, hP'ne, hQ'ne,
    rfl, rfl⟩
      · obtain ⟨i⟩ := ?Nonempty _?; exact ⟨i, Or.inl ⟨hA, rfl⟩⟩
      · obtain ⟨i, hi⟩ := a.map_continuous_mp hdir hf hr0
        obtain ⟨j, hj⟩ := b.map_continuous_mp hdir hf hr1
        obtain ⟨k, hik, hjk⟩ := hdir i j
        exact ⟨k, Or.inr ⟨P, Q, P', Q', (a.map_mono hik) P P' hi, (b.map_mono hjk) Q Q'
     hj,
           hPne, hQne, hP'ne, hQ'ne, rfl, rfl⟩⟩

theorem GExpr.map_continuous (T : GExpr) {I : Type} [Nonempty I] {X Y : ScottSys}
    (g : I → ApproximableMap X.sys Y.sys) (f : ApproximableMap X.sys Y.sys)
    (hdir : ∀ i j, ∃ k, g i ≤ g k ∧ g j ≤ g k)
    (hf : ∀ A B, f.rel A B ↔ ∃ i, (g i).rel A B) (A B : Set Str) :
    (T.map f).rel A B ↔ ∃ i, (T.map (g i)).rel A B := by
  refine ⟨T.map_continuous_mp hdir hf, ?_⟩
  rintro ⟨i, hi⟩
  have hgif : g i ≤ f := by
    rw [ApproximableMap.le_iff]; intro A' B' h; exact (hf A' B').mpr ⟨i, h⟩
  exact (T.map_mono hgif) A B hi

end Exercise619
end

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

theorem otimesTok_mem_prod_inv {X Y : Set Str} (h : (otimesTok D₀ D₁).mem (prodTokNbhd
    X Y))
    (hX : X = D₀.master) : D₀.mem X ∧ D₁.mem Y := by
  rcases h with heq | ⟨X', Y', hX', hY', -, -, heq⟩
  · obtain ⟨rfl, -⟩ := prodTokNbhd_injective heq; exact absurd rfl hX
  · obtain ⟨rfl, rfl⟩ := prodTokNbhd_injective heq; exact ⟨hX', hY'⟩

end Exercise619
end

section
namespace Exercise619
```

```
variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

variable {A₀ A₁ B₀ B₁ : ScottSys}

theorem otimesTok_subsystem (h0 : A₀.sys ? B₀.sys) (h1 : A₁.sys ? B₁.sys) :
    (A₀.otimes A₁).sys ? (B₀.otimes B₁).sys := by
  have heqm : prodTokNbhd A₀.sys.master A₁.sys.master
      = prodTokNbhd B₀.sys.master B₁.sys.master := by rw [h0.master_eq, h1.master_eq]
  refine ⟨heqm, ?_, ?_⟩
  · rintro W (rfl | ⟨X, Y, hX, hY, hXne, hYne, rfl⟩)
    · exact Or.inl heqm
    · exact Or.inr ⟨X, Y, h0.sub hX, h1.sub hY, h0.master_eq ▶ hXne, h1.master_eq ▶
    hYne, rfl⟩
  · rintro W W' (rfl | ⟨X, Y, hX, hY, hXne, hYne, rfl⟩)
      (rfl | ⟨X', Y', hX', hY', hX'ne, hY'ne, rfl⟩) hInt
    · rw [Set.inter_self]; exact Or.inl rfl
    · rw [prodTokNbhd_inter, Set.inter_eq_right.mpr (A₀.sys.sub_master hX'),
        Set.inter_eq_right.mpr (A₁.sys.sub_master hY')]
      exact Or.inr ⟨X', Y', hX', hY', hX'ne, hY'ne, rfl⟩
    · rw [Set.inter_comm, prodTokNbhd_inter, Set.inter_eq_right.mpr (A₀.sys.sub_master
    hX),
        Set.inter_eq_right.mpr (A₁.sys.sub_master hY)]
      exact Or.inr ⟨X, Y, hX, hY, hXne, hYne, rfl⟩
    · rw [prodTokNbhd_inter] at hInt ⊢
      have hXne' : X ∩ X' = B₀.sys.master := by
        rw [← h0.master_eq]; exact inter_ne_of_ne_left (A₀.sys.sub_master hX) hXne
      obtain ⟨hmemX, hmemY⟩ := otimesTok_mem_prod_inv hInt hXne'
      exact Or.inr ⟨X ∩ X', Y ∩ Y', h0.inter_closed hX hX' hmemX, h1.inter_closed hY hY
    ' hmemY,
        inter_ne_of_ne_left (A₀.sys.sub_master hX) hXne,
        inter_ne_of_ne_left (A₁.sys.sub_master hY) hYne, rfl⟩

end Exercise619
end

section
namespace Exercise619

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

variable {A₀ A₁ B₀ B₁ : ScottSys}

variable {C₀ C₁ : ScottSys}

theorem GExpr.obj_subsystem : (T : GExpr) → {X Y : ScottSys} → X.sys ? Y.sys →
    (T.obj X).sys ? (T.obj Y).sys
  | .const D, _, _, _ => Subsystem.refl D.sys
  | .var, _, _, h => h
  | .sum a b, _, _, h => sumTok_subsystem (a.obj_subsystem h) (b.obj_subsystem h)
  | .prod a b, _, _, h => prodTok_subsystem (a.obj_subsystem h) (b.obj_subsystem h)
  | .oplus a b, _, _, h => oplusTok_subsystem (a.obj_subsystem h) (b.obj_subsystem h)
```

```
  | .otimes a b, _, _, h => otimesTok_subsystem (a.obj_subsystem h) (b.obj_subsystem h
    )

theorem GExpr.obj_continuous_mp : (T : GExpr) → {? : Set ScottSys} → {U : ScottSys}
    →
    DirectedOn (fun a b => a.sys ? b.sys) ? → ?.Nonempty →
    (∀ D ∈ ?, D.sys ? U.sys) → (∀ X, U.sys.mem X ↔ ∃ D ∈ ?, D.sys.mem X) →
    {W : Set Str} → (T.obj U).sys.mem W → ∃ D ∈ ?, (T.obj D).sys.mem W
  | .const _, _, _, _, hne, _, _, _, hmem => by
      obtain ⟨D, hD⟩ := hne; exact ⟨D, hD, hmem⟩
  | .var, _, _, _, _, _, hU, W, hmem => (hU W).mp hmem
  | .sum a b, _, _, hdir, hne, hsub, hU, _, hmem => by
      rcases hmem with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
      · obtain ⟨D, hD⟩ := hne
        exact ⟨D, hD, Or.inl ((GExpr.sum a b).obj_subsystem (hsub D hD)).master_eq.symm
    ⟩
      · obtain ⟨D, hD, hXD⟩ := a.obj_continuous_mp hdir hne hsub hU hX
        exact ⟨D, hD, Or.inr (Or.inl ⟨X, hXD, rfl⟩)⟩
      · obtain ⟨D, hD, hYD⟩ := b.obj_continuous_mp hdir hne hsub hU hY
        exact ⟨D, hD, Or.inr (Or.inr ⟨Y, hYD, rfl⟩)⟩
  | .prod a b, _, _, hdir, hne, hsub, hU, _, hmem => by
      obtain ⟨X, Y, hX, hY, rfl⟩ := hmem
      obtain ⟨D₁, hD₁, hXD⟩ := a.obj_continuous_mp hdir hne hsub hU hX
      obtain ⟨D₂, hD₂, hYD⟩ := b.obj_continuous_mp hdir hne hsub hU hY
      obtain ⟨D₃, hD₃, hr1, hr2⟩ := hdir D₁ hD₁ D₂ hD₂
      exact ⟨D₃, hD₃, X, Y, (a.obj_subsystem hr1).sub hXD, (b.obj_subsystem hr2).sub
    hYD, rfl⟩
  | .oplus a b, _, _, hdir, hne, hsub, hU, _, hmem => by
      rcases hmem with rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩
      · obtain ⟨D, hD⟩ := hne
        exact ⟨D, hD, Or.inl ((GExpr.oplus a b).obj_subsystem (hsub D hD)).master_eq.
    symm⟩
      · obtain ⟨D, hD, hXD⟩ := a.obj_continuous_mp hdir hne hsub hU hX
        refine ⟨D, hD, Or.inr (Or.inl ⟨X, hXD, ?_, rfl⟩)⟩
        exact fun heq => hXne (heq.trans (a.obj_subsystem (hsub D hD)).master_eq)
      · obtain ⟨D, hD, hYD⟩ := b.obj_continuous_mp hdir hne hsub hU hY
        refine ⟨D, hD, Or.inr (Or.inr ⟨Y, hYD, ?_, rfl⟩)⟩
        exact fun heq => hYne (heq.trans (b.obj_subsystem (hsub D hD)).master_eq)
  | .otimes a b, _, _, hdir, hne, hsub, hU, _, hmem => by
      rcases hmem with rfl | ⟨X, Y, hX, hY, hXne, hYne, rfl⟩
      · obtain ⟨D, hD⟩ := hne
        exact ⟨D, hD, Or.inl ((GExpr.otimes a b).obj_subsystem (hsub D hD)).master_eq.
    symm⟩
      · obtain ⟨D₁, hD₁, hXD⟩ := a.obj_continuous_mp hdir hne hsub hU hX
        obtain ⟨D₂, hD₂, hYD⟩ := b.obj_continuous_mp hdir hne hsub hU hY
        obtain ⟨D₃, hD₃, hr1, hr2⟩ := hdir D₁ hD₁ D₂ hD₂
        refine ⟨D₃, hD₃, Or.inr ⟨X, Y, (a.obj_subsystem hr1).sub hXD,
          (b.obj_subsystem hr2).sub hYD, ?_, ?_, rfl⟩⟩
        · exact fun heq => hXne (heq.trans (a.obj_subsystem (hsub D₃ hD₃)).master_eq)
        · exact fun heq => hYne (heq.trans (b.obj_subsystem (hsub D₃ hD₃)).master_eq)

theorem GExpr.obj_continuous (T : GExpr) {? : Set ScottSys} {U : ScottSys}
    (hdir : DirectedOn (fun a b => a.sys ? b.sys) ?) (hne : ?.Nonempty)
    (hsub : ∀ D ∈ ?, D.sys ? U.sys) (hU : ∀ X, U.sys.mem X ↔ ∃ D ∈ ?, D.sys.mem X)
    (W : Set Str) : (T.obj U).sys.mem W ↔ ∃ D ∈ ?, (T.obj D).sys.mem W := by
  refine ⟨T.obj_continuous_mp hdir hne hsub hU, ?_⟩
```

```
  rintro ⟨D, hD, hmem⟩
  exact (T.obj_subsystem (hsub D hD)).sub hmem

end Exercise619
end

end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 6.21. Do the same as 6.19 and 6.20 when the functors are also allowed to be generated by the operations:

$$D_0 \oplus D_1 = \{\{\Lambda\} \cup 0\Delta_0 \cup 1\Delta_1\} \cup \{0X \mid X \in D_0 \setminus \{\Delta_0\}\} \cup \{1Y \mid Y \in D_1 \setminus \{\Delta_1\}\},$$

$$D_0 \otimes D_1 = \{\{\Lambda\} \cup 0\Delta_0 \cup 1\Delta_1\} \cup \{\{\Lambda\} \cup 0X \cup 1Y \mid X \in D_0 \setminus \{\Delta_0\} \text{ and } Y \in D_1 \setminus \{\Delta_1\}\}.$$

Generalize all of $+$, $\times$, $\oplus$, $\otimes$ to combinations of several terms, not just the binary sums and products.

3.7.24 Exercise 6.22 — equations for the integers

Exercise_6_22.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_12
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_21

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Proposition_6_6

@[expose] public section

section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise619

open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB

namespace Exercise619

def Cnat : ScottSys where
  sys :=
    { mem := fun X => X = {([false] : Str)} ∨ X = {([false] : Str), ([] : Str)}
      master := {([false] : Str), ([] : Str)}
      master_nonempty := ⟨[false], Set.mem_insert _ _⟩
      master_mem := Or.inr rfl
      inter_mem := by
        have hAB : ({([false] : Str)} : Set Str) ⊆ {([false] : Str), ([] : Str)} :=
          Set.singleton_subset_iff.mpr (Set.mem_insert _ _)
        rintro X Y Z (rfl | rfl) (rfl | rfl) _ _
        · exact Or.inl (Set.inter_self _)
```

```
        · exact Or.inl (Set.inter_eq_self_of_subset_left hAB)
        · exact Or.inl (Set.inter_eq_self_of_subset_right hAB)
        · exact Or.inr (Set.inter_self _)
      sub_master := by
        have hAB : ({([false] : Str)} : Set Str) ⊆ {([false] : Str), ([] : Str)} :=
          Set.singleton_subset_iff.mpr (Set.mem_insert _ _)
        rintro X (rfl | rfl)
        · exact hAB
        · exact subset_rfl }
  ne := by
    rintro X (rfl | rfl)
    · exact ⟨[false], rfl⟩
    · exact ⟨[false], Set.mem_insert _ _⟩

end Exercise619

end DomainTheory.NeighbourhoodSystems
end

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise619
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB

section
namespace Exercise619

def Cone : ScottSys := singletonSys ({([] : Str)} : Set Str) ⟨[], rfl⟩

def MExpr : GExpr := .sum (.const Cone) .var

def NExpr : GExpr := .oplus (.const Cnat) .var

def NStarExpr (N : ScottSys) : GExpr := .oplus (.const N) (.otimes (.const N) .var)

theorem NStarExpr_rooted {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master) :
    (NStarExpr N).RootedConst := ⟨hN, hN, trivial⟩

theorem NStar_eq_solution (N : ScottSys) (hN : ([] : Str) ∈ N.sys.master) :
    ∃ (Γ : Set Str) (h : Γ.Nonempty),
      (singletonSys Γ h).sys ? ((NStarExpr N).obj (singletonSys Γ h)).sys :=
  gExists_singleton_subsystem (NStarExpr N) (NStarExpr_rooted hN)

theorem nil_mem_Cnat : ([] : Str) ∈ Cnat.sys.master := Set.mem_insert_iff.mpr (Or.inr
    rfl)

theorem NExpr_rooted : NExpr.RootedConst := ⟨nil_mem_Cnat, trivial⟩

theorem NStar_over_N_exists :
    ∃ N : ScottSys, ([] : Str) ∈ N.sys.master ∧
      ∃ (Γ : Set Str) (h : Γ.Nonempty),
        (singletonSys Γ h).sys ? ((NStarExpr N).obj (singletonSys Γ h)).sys := by
  obtain ⟨Γ₁, hnil₁, _⟩ := gExists_tok_fixedPoint NExpr NExpr_rooted
  exact ⟨singletonSys Γ₁ ⟨[], hnil₁⟩, hnil₁, NStar_eq_solution _ hnil₁⟩
```

```
end Exercise619
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise619
section
set_option linter.unusedVariables false

theorem example_622 : ∃ (N : DomainTheory.NeighbourhoodSystems.Exercise619.ScottSys),
  And
    (@Membership.mem (List Bool) (Set DomainTheory.NeighbourhoodSystems.ExampleB.Str)
      (@Set.instMembership DomainTheory.NeighbourhoodSystems.ExampleB.Str)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.master DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        N.sys)
      (@List.nil Bool))
    (∃ (Γ : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str) (h :
      @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str Γ),
      @DomainTheory.NeighbourhoodSystems.Subsystem DomainTheory.NeighbourhoodSystems.
    ExampleB.Str
        (DomainTheory.NeighbourhoodSystems.Exercise619.singletonSys Γ h).sys
        ((DomainTheory.NeighbourhoodSystems.Exercise619.NStarExpr N).obj
            (DomainTheory.NeighbourhoodSystems.Exercise619.singletonSys Γ h)).sys) :=
  DomainTheory.NeighbourhoodSystems.Exercise619.NStar_over_N_exists
end

end DomainTheory.NeighbourhoodSystems.Exercise619
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise619

section
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB

namespace Exercise619

theorem N_eq_solution :
    ∃ (Γ : Set Str) (h : Γ.Nonempty),
      (singletonSys Γ h).sys ? (NExpr.obj (singletonSys Γ h)).sys :=
  gExists_singleton_subsystem NExpr NExpr_rooted

theorem nil_mem_Cone : ([] : Str) ∈ Cone.sys.master := rfl

theorem MExpr_rooted : MExpr.RootedConst := ⟨nil_mem_Cone, trivial⟩

theorem M_eq_solution :
    ∃ (Γ : Set Str) (h : Γ.Nonempty),
      (singletonSys Γ h).sys ? (MExpr.obj (singletonSys Γ h)).sys :=
  gExists_singleton_subsystem MExpr MExpr_rooted

end Exercise619
end

section
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB DomainTheory.NeighbourhoodSystems.Exercise510
```

```
namespace Exercise619

def gFix (T : GExpr) : Set Str := ⋃ n, gIter T n

theorem gFix_fixed (T : GExpr) (hT : T.RootedConst) : gFun T (gFix T) = gFix T :=
  gFun_iter_fixed T hT

theorem gFix_nil_mem (T : GExpr) : ([] : Str) ∈ gFix T :=
  Set.mem_iUnion.mpr ⟨0, rfl⟩

theorem gFix_nonempty (T : GExpr) : (gFix T).Nonempty := ⟨[], gFix_nil_mem T⟩

def gGen (T : GExpr) : ScottSys := singletonSys (gFix T) (gFix_nonempty T)

@[simp] theorem gGen_master (T : GExpr) : (gGen T).sys.master = gFix T := rfl

theorem gBase (T : GExpr) (hT : T.RootedConst) : (gGen T).sys ? (T.obj (gGen T)).sys
    := by
  have hmaster : (T.obj (gGen T)).sys.master = gFix T :=
    (gFun_eq_master T (gFix_nonempty T)).symm.trans (gFix_fixed T hT)
  refine ⟨hmaster.symm, ?_, ?_⟩
  · intro X hX
    have heq : X = (T.obj (gGen T)).sys.master := (hX : X = gFix T).trans hmaster.symm
    rw [heq]; exact (T.obj (gGen T)).sys.master_mem
  · intro X Y hX hY _
    show X ∩ Y = gFix T
    rw [show X = gFix T from hX, show Y = gFix T from hY, Set.inter_self]

def gTower (T : GExpr) : ℕ → ScottSys
  | 0 => gGen T
  | n + 1 => T.obj (gTower T n)

@[simp] theorem gTower_zero (T : GExpr) : gTower T 0 = gGen T := rfl

@[simp] theorem gTower_succ (T : GExpr) (n : ℕ) : gTower T (n + 1) = T.obj (gTower T n
    ) := rfl

theorem gChain (T : GExpr) (hT : T.RootedConst) :
    ∀ n, (gTower T n).sys ? (gTower T (n + 1)).sys
  | 0 => gBase T hT
  | n + 1 => T.obj_subsystem (gChain T hT n)

theorem gTower_le (T : GExpr) (hT : T.RootedConst) {n m : ℕ} (h : n ≤ m) :
    (gTower T n).sys ? (gTower T m).sys := by
  induction h with
  | refl => exact Subsystem.refl _
  | step _ ih => exact ih.trans (gChain T hT _)

theorem gTower_master (T : GExpr) (hT : T.RootedConst) :
    ∀ n, (gTower T n).sys.master = gFix T
  | 0 => rfl
  | n + 1 => ((gChain T hT n).master_eq).symm.trans (gTower_master T hT n)

def gColim (T : GExpr) (hT : T.RootedConst) : ScottSys where
  sys :=
```

```
    { mem := fun X => ∃ n, (gTower T n).sys.mem X
      master := gFix T
      master_nonempty := (gTower T 0).sys.master_nonempty
      master_mem := ⟨0, (gTower T 0).sys.master_mem⟩
      inter_mem := by
        rintro X Y Z ⟨n, hX⟩ ⟨m, hY⟩ ⟨p, hZ⟩ hsub
        set N := max n (max m p) with hN
        have hXN : (gTower T N).sys.mem X := (gTower_le T hT (le_max_left n _)).sub hX
        have hYN : (gTower T N).sys.mem Y :=
          (gTower_le T hT ((le_max_left m p).trans (le_max_right n _))).sub hY
        have hZN : (gTower T N).sys.mem Z :=
          (gTower_le T hT ((le_max_right m p).trans (le_max_right n _))).sub hZ
        exact ⟨N, (gTower T N).sys.inter_mem hXN hYN hZN hsub⟩
      sub_master := by
        rintro X ⟨n, hX⟩
        rw [← gTower_master T hT n]
        exact (gTower T n).sys.sub_master hX }
  ne := by rintro X ⟨n, hX⟩; exact (gTower T n).ne X hX

@[simp] theorem mem_gColim (T : GExpr) (hT : T.RootedConst) {X : Set Str} :
    (gColim T hT).sys.mem X ↔ ∃ n, (gTower T n).sys.mem X := Iff.rfl

@[simp] theorem gColim_master (T : GExpr) (hT : T.RootedConst) :
    (gColim T hT).sys.master = gFix T := rfl

def Texp (N : ScottSys) : GExpr :=
  .oplus (.const N) (.sum (.prod .var .var) (.prod .var .var))

theorem Texp_rooted {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master) : (Texp N).
    RootedConst :=
  ⟨hN, ⟨trivial, trivial⟩, ⟨trivial, trivial⟩⟩

def Exp (N : ScottSys) (hN : ([] : Str) ∈ N.sys.master) : ScottSys :=
  gColim (Texp N) (Texp_rooted hN)

theorem ScottSys.ext {A B : ScottSys} (h : A.sys = B.sys) : A = B := by
  cases A; cases B; cases h; rfl

instance : Category ScottSys where
  Hom A B := StrictMap A.sys B.sys
  id A := ⟨idMap A.sys, isStrict_idMap⟩
  comp f g := ⟨g.1.comp f.1, isStrict_comp g.2 f.2⟩
  id_comp f := Subtype.ext (comp_idMap f.1)
  comp_id f := Subtype.ext (idMap_comp f.1)
  assoc f g h := Subtype.ext (comp_assoc h.1 g.1 f.1).symm

theorem gTower_sub_colim (T : GExpr) (hT : T.RootedConst) (n : ℕ) :
    (gTower T n).sys ? (gColim T hT).sys where
  master_eq := by rw [gColim_master, gTower_master T hT]
  sub hX := ⟨n, hX⟩
  inter_closed := by
    rintro X Y hX hY ⟨m, hXY⟩
    have hN : (gTower T (max n m)).sys.mem (X ∩ Y) :=
      (gTower_le T hT (le_max_right n m)).sub hXY
    exact (gTower_le T hT (le_max_left n m)).inter_closed hX hY hN
```

```
theorem gColim_obj_sys_eq (T : GExpr) (hT : T.RootedConst) :
    (T.obj (gColim T hT)).sys = (gColim T hT).sys := by
  set ? : Set ScottSys := Set.range (gTower T) with h?
  have hne : ?.Nonempty := ⟨gTower T 0, 0, rfl⟩
  have hsub : ∀ D ∈ ?, D.sys ? (gColim T hT).sys := by
    rintro D ⟨n, rfl⟩; exact gTower_sub_colim T hT n
  have hdir : DirectedOn (fun a b => a.sys ? b.sys) ? := by
    rintro _ ⟨n, rfl⟩ _ ⟨m, rfl⟩
    exact ⟨gTower T (max n m), ⟨max n m, rfl⟩,
      gTower_le T hT (le_max_left n m), gTower_le T hT (le_max_right n m)⟩
  have hU : ∀ X, (gColim T hT).sys.mem X ↔ ∃ D ∈ ?, D.sys.mem X := by
    intro X; constructor
    · rintro ⟨n, hn⟩; exact ⟨gTower T n, ⟨n, rfl⟩, hn⟩
    · rintro ⟨D, ⟨n, rfl⟩, hn⟩; exact ⟨n, hn⟩
  apply NeighborhoodSystem.ext
  · intro W
    rw [T.obj_continuous hdir hne hsub hU W]
    constructor
    · rintro ⟨D, ⟨n, rfl⟩, hn⟩

      exact ⟨n + 1, hn⟩
    · rintro ⟨n, hn⟩

      exact ⟨gTower T n, ⟨n, rfl⟩, (gChain T hT n).sub hn⟩
  .
    have h := (T.obj_subsystem (gTower_sub_colim T hT 0)).master_eq
    rw [gColim_master]
    rw [show (T.obj (gTower T 0)) = gTower T 1 from rfl] at h
    rw [← h, gTower_master T hT]

theorem gColim_obj_eq (T : GExpr) (hT : T.RootedConst) : T.obj (gColim T hT) = gColim
    T hT :=
  ScottSys.ext (gColim_obj_sys_eq T hT)

theorem Exp_structure_eq (N : ScottSys) (hN : ([] : Str) ∈ N.sys.master) :
    (Texp N).obj (Exp N hN) = Exp N hN :=
  gColim_obj_eq (Texp N) (Texp_rooted hN)

@[simp] theorem ScottSys.id_val (A : ScottSys) :
    ((? A) : StrictMap A.sys A.sys).1 = idMap A.sys := rfl

@[simp] theorem ScottSys.comp_val {A B C : ScottSys} (g : (B ⟶ C)) (f : (A ⟶ B)) :
    ((g ? f : StrictMap A.sys C.sys)).1 = g.1.comp f.1 := rfl

def gFunctorMap (T : GExpr) {X Y : ScottSys} (f : StrictMap X.sys Y.sys) :
    StrictMap (T.obj X).sys (T.obj Y).sys :=
  ⟨T.map f.1, T.map_isStrict f.1 f.2⟩

abbrev gFunctor (T : GExpr) : Endofunctor ScottSys where
  obj := T.obj
  map := gFunctorMap T
  map_id X := Subtype.ext (T.map_id X)
  map_comp {_ _ _} g f :=
    Subtype.ext (T.map_comp (f : StrictMap _ _).1 (g : StrictMap _ _).2)
```

```
@[simp] theorem gFunctor_obj (T : GExpr) (X : ScottSys) : (gFunctor T).obj X = T.obj X
     := rfl

@[simp] theorem gFunctorMap_val (T : GExpr) {X Y : ScottSys} (f : StrictMap X.sys Y.
    sys) :
     (gFunctorMap T f).1 = T.map f.1 := rfl

abbrev TexpF (N : ScottSys) : Endofunctor ScottSys := gFunctor (Texp N)

def algStr (B : TAlgebra (TexpF N)) :
    ApproximableMap ((TexpF N).obj B.carrier).sys B.carrier.sys :=
  (B.str : StrictMap ((TexpF N).obj B.carrier).sys B.carrier.sys).1

theorem algStr_strict (B : TAlgebra (TexpF N)) : IsStrict (algStr B) :=
  (B.str : StrictMap ((TexpF N).obj B.carrier).sys B.carrier.sys).2

def isoOfObjEq {Obj : Type*} [Category Obj] {X Y : Obj} (h : X = Y) : Iso X Y := by
  cases h
  exact ⟨(? X), (? X), CategoryTheory.Category.id_comp _, CategoryTheory.Category.
    id_comp _⟩

def ExpIso (N : ScottSys) (hN : ([] : Str) ∈ N.sys.master) :
    Iso ((TexpF N).obj (Exp N hN)) (Exp N hN) :=
  isoOfObjEq (Exp_structure_eq N hN)

abbrev ExpAlg (N : ScottSys) (hN : ([] : Str) ∈ N.sys.master) : TAlgebra (TexpF N)
    where
  carrier := Exp N hN
  str := (ExpIso N hN).hom

def expHom (N : ScottSys) (hN : ([] : Str) ∈ N.sys.master) :
    ApproximableMap ((TexpF N).obj (Exp N hN)).sys (Exp N hN).sys :=
  ((ExpIso N hN).hom : StrictMap ((TexpF N).obj (Exp N hN)).sys (Exp N hN).sys).1

def expInv (N : ScottSys) (hN : ([] : Str) ∈ N.sys.master) :
    ApproximableMap (Exp N hN).sys ((TexpF N).obj (Exp N hN)).sys :=
  ((ExpIso N hN).inv : StrictMap (Exp N hN).sys ((TexpF N).obj (Exp N hN)).sys).1

section Existence

variable {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master) (B : TAlgebra (TexpF N))

def descRel : ℕ → ApproximableMap (Exp N hN).sys B.carrier.sys
  | 0 => constMap (Exp N hN).sys B.carrier.sys.bot
  | n + 1 => (algStr B).comp (((Texp N).map (descRel n)).comp (expInv N hN))

@[simp] theorem descRel_succ (n : ℕ) :
    descRel hN B (n + 1) = (algStr B).comp (((Texp N).map (descRel hN B n)).comp (
    expInv N hN)) :=
  rfl

end Existence

end Exercise619
end
```

```
section
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB DomainTheory.NeighbourhoodSystems.Exercise510

namespace Exercise619

variable {A₀ A₁ B₀ B₁ : ScottSys}

section Uniqueness

variable {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master)

variable (B : TAlgebra (TexpF N))

theorem algHom_ext {A C : TAlgebra (TexpF N)} {g g' : AlgHom A C} (h : g.hom = g'.hom)
     : g = g' := by
  cases g; cases g'; cases h; rfl

end Uniqueness

end Exercise619
end

section
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB DomainTheory.NeighbourhoodSystems.Exercise510

namespace Exercise619

section Existence

variable {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master) (B : TAlgebra (TexpF N))

theorem constBot_le {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem
    β}
    (g : ApproximableMap V₀ V₁) : constMap V₀ V₁.bot ≤ g := by
  intro X Y hr
  obtain ⟨hX, hY⟩ := hr
  rw [NeighborhoodSystem.mem_bot] at hY
  subst hY
  exact g.mono g.master_rel (V₀.sub_master hX) subset_rfl hX V₁.master_mem

theorem descRel_le_succ : ∀ n, descRel hN B n ≤ descRel hN B (n + 1)
  | 0 => constBot_le _
  | n + 1 => by
      rw [descRel_succ, descRel_succ]
      exact comp_mono_gen le_rfl
        (comp_mono_gen ((Texp N).map_mono (descRel_le_succ n)) le_rfl)

theorem descRel_mono {i j : ℕ} (h : i ≤ j) : descRel hN B i ≤ descRel hN B j := by
  induction h with
  | refl => exact le_rfl
  | step _ ih => exact ih.trans (descRel_le_succ hN B _)

theorem descDir (i j : ℕ) : ∃ k, (∀ X Y, (descRel hN B i).rel X Y → (descRel hN B k).
    rel X Y) ∧
```

```
    (∀ X Y, (descRel hN B j).rel X Y → (descRel hN B k).rel X Y) :=
  ⟨max i j, descRel_mono hN B (le_max_left i j), descRel_mono hN B (le_max_right i j)⟩

theorem descDirLe (i j : ℕ) :
    ∃ k, descRel hN B i ≤ descRel hN B k ∧ descRel hN B j ≤ descRel hN B k :=
  ⟨max i j, descRel_mono hN B (le_max_left i j), descRel_mono hN B (le_max_right i j)⟩

def descMap : ApproximableMap (Exp N hN).sys B.carrier.sys :=
  iSupMap (descRel hN B) (descDir hN B)

theorem descMap_is_sup (A E : Set Str) :
    (descMap hN B).rel A E ↔ ∃ n, (descRel hN B n).rel A E := Iff.rfl

theorem descMap_fix :
    descMap hN B = (algStr B).comp (((Texp N).map (descMap hN B)).comp (expInv N hN))
    := by
  have hmc : ∀ Y C, ((Texp N).map (descMap hN B)).rel Y C
      ↔ ∃ n, ((Texp N).map (descRel hN B n)).rel Y C :=
    fun Y C => (Texp N).map_continuous (descRel hN B) (descMap hN B) (descDirLe hN B)
      (descMap_is_sup hN B) Y C
  apply ApproximableMap.ext
  intro A E
  rw [comp_rel]
  constructor
  · rintro ⟨n, hn⟩
    have hn1 : (descRel hN B (n + 1)).rel A E := descRel_le_succ hN B n A E hn
    rw [descRel_succ, comp_rel] at hn1
    obtain ⟨C, hAC, hCE⟩ := hn1
    rw [comp_rel] at hAC
    obtain ⟨Y, hAY, hYC⟩ := hAC
    exact ⟨C, ⟨Y, hAY, (hmc Y C).mpr ⟨n, hYC⟩⟩, hCE⟩
  · rintro ⟨C, hAC, hCE⟩
    rw [comp_rel] at hAC
    obtain ⟨Y, hAY, hYC⟩ := hAC
    obtain ⟨n, hn⟩ := (hmc Y C).mp hYC
    refine ⟨n + 1, ?_⟩
    rw [descRel_succ, comp_rel]
    exact ⟨C, by rw [comp_rel]; exact ⟨Y, hAY, hn⟩, hCE⟩

theorem descMap_rel {A E : Set Str} :
    (descMap hN B).rel A E ↔ ∃ n, (descRel hN B n).rel A E := Iff.rfl

end Existence

theorem expInv_comp_expHom (N : ScottSys) (hN : ([] : Str) ∈ N.sys.master) :
    (expInv N hN).comp (expHom N hN) = idMap ((TexpF N).obj (Exp N hN)).sys := by
  have h := congrArg (Subtype.val) (ExpIso N hN).hom_inv_id
  exact h

section Existence

variable {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master) (B : TAlgebra (TexpF N))

theorem descComm :
    (descMap hN B).comp (expHom N hN) = (algStr B).comp ((Texp N).map (descMap hN B))
    := by
```

```
  calc (descMap hN B).comp (expHom N hN)
      = ((algStr B).comp (((Texp N).map (descMap hN B)).comp (expInv N hN))).comp (
    expHom N hN) := by
        rw [← descMap_fix]
    _ = (algStr B).comp ((((Texp N).map (descMap hN B)).comp (expInv N hN)).comp (
    expHom N hN)) := by
        rw [comp_assoc]
    _ = (algStr B).comp (((Texp N).map (descMap hN B)).comp ((expInv N hN).comp (
    expHom N hN))) := by
        rw [comp_assoc]
    _ = (algStr B).comp (((Texp N).map (descMap hN B)).comp (idMap _)) := by
        rw [expInv_comp_expHom]
    _ = (algStr B).comp ((Texp N).map (descMap hN B)) := by rw [comp_idMap]

end Existence

theorem expInv_strict (N : ScottSys) (hN : ([] : Str) ∈ N.sys.master) : IsStrict (
    expInv N hN) :=
  ((ExpIso N hN).inv : StrictMap (Exp N hN).sys ((TexpF N).obj (Exp N hN)).sys).2

section Existence

variable {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master) (B : TAlgebra (TexpF N))

theorem descRel_isStrict : ∀ n, IsStrict (descRel hN B n)
  | 0 => isStrict_constBot
  | n + 1 => by
      rw [descRel_succ]
      exact isStrict_comp (algStr_strict B)
        (isStrict_comp ((Texp N).map_isStrict _ (descRel_isStrict n)) (expInv_strict N
     hN))

theorem descMap_isStrict : IsStrict (descMap hN B) := by
  rintro Y ⟨n, hn⟩
  exact descRel_isStrict hN B n hn

def descAlgHom : AlgHom (ExpAlg N hN) B where
  hom := ⟨descMap hN B, descMap_isStrict hN B⟩
  comm := by
    apply Subtype.ext
    show (descMap hN B).comp (expHom N hN) = (algStr B).comp ((Texp N).map (descMap hN
     B))
    exact descComm hN B

end Existence

end Exercise619
end

section
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB DomainTheory.NeighbourhoodSystems.Exercise510

namespace Exercise619

variable {A₀ A₁ B₀ B₁ : ScottSys}
```

```
section Uniqueness

variable {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master)

theorem expSub (n : ℕ) : (gTower (Texp N) n).sys ? (Exp N hN).sys :=
  gTower_sub_colim (Texp N) (Texp_rooted hN) n

end Uniqueness

end Exercise619
end

section
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB DomainTheory.NeighbourhoodSystems.Exercise510

namespace Exercise619

theorem Subsystem.inj_isStrict {α : Type*} {D E : NeighborhoodSystem α} (h : D ? E) :
    IsStrict h.inj := by
  intro Y hrel
  rw [Subsystem.inj_rel] at hrel
  obtain ⟨_, hYE, hsub⟩ := hrel
  exact Set.Subset.antisymm (E.sub_master hYE) (by rw [← h.master_eq]; exact hsub)

end Exercise619
end

section
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB DomainTheory.NeighbourhoodSystems.Exercise510

namespace Exercise619

variable {A₀ A₁ B₀ B₁ : ScottSys}

theorem isoOfObjEq_hom_rel {X Y : ScottSys} (e : X = Y) {A E : Set Str} :
    ((isoOfObjEq e).hom).1.rel A E ↔ X.sys.mem A ∧ Y.sys.mem E ∧ A ⊆ E := by
  cases e; exact idMap_rel

theorem expHom_rel {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master) {A E : Set Str} :
    (expHom N hN).rel A E ↔
      ((Texp N).obj (Exp N hN)).sys.mem A ∧ (Exp N hN).sys.mem E ∧ A ⊆ E :=
  isoOfObjEq_hom_rel (Exp_structure_eq N hN)

theorem isoOfObjEq_inv_rel {X Y : ScottSys} (e : X = Y) {A E : Set Str} :
    ((isoOfObjEq e).inv).1.rel A E ↔ Y.sys.mem A ∧ X.sys.mem E ∧ A ⊆ E := by
  cases e; exact idMap_rel

theorem expInv_rel {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master) {A E : Set Str} :
    (expInv N hN).rel A E ↔
      (Exp N hN).sys.mem A ∧ ((Texp N).obj (Exp N hN)).sys.mem E ∧ A ⊆ E :=
  isoOfObjEq_inv_rel (Exp_structure_eq N hN)

theorem oplusMapTok_inj (h0 : A₀.sys ? B₀.sys) (h1 : A₁.sys ? B₁.sys) :
```

```
    oplusMapTok h0.inj h1.inj = (oplusTok_subsystem h0 h1).inj := by
  have hsubM : ∀ {W : Set Str}, (A₀.oplus A₁).sys.mem W → W ⊆ sumTokMaster B₀.sys B₁.
    sys := by
    rintro W (rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩)
    · exact (show sumTokMaster A₀.sys A₁.sys = sumTokMaster B₀.sys B₁.sys by
        unfold sumTokMaster; rw [h0.master_eq, h1.master_eq]).subset
    · exact embF_subset_sumTokMaster (h0.sub hX)
    · exact embT_subset_sumTokMaster (h1.sub hY)
  apply ApproximableMap.ext
  intro W W'
  rw [Subsystem.inj_rel]
  constructor
  · rintro (⟨hW, rfl⟩ | ⟨X, X', ⟨hX, hX', hXs⟩, hXne, hX'ne, rfl, rfl⟩ |
      ⟨Y, Y', ⟨hY, hY', hYs⟩, hYne, hY'ne, rfl, rfl⟩)
    · exact ⟨hW, (B₀.oplus B₁).sys.master_mem, hsubM hW⟩
    · exact ⟨Or.inr (Or.inl ⟨X, hX, hXne, rfl⟩), Or.inr (Or.inl ⟨X', hX', hX'ne, rfl⟩),
        embBit_subset.mpr hXs⟩
    · exact ⟨Or.inr (Or.inr ⟨Y, hY, hYne, rfl⟩), Or.inr (Or.inr ⟨Y', hY', hY'ne, rfl⟩),
        embBit_subset.mpr hYs⟩
  · rintro ⟨hW, hW', hsub⟩
    rcases hW' with rfl | ⟨X', hX', hX'ne, rfl⟩ | ⟨Y', hY', hY'ne, rfl⟩
    · exact Or.inl ⟨hW, rfl⟩
    · rcases hW with rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩
      · exact absurd (hsub nil_mem_sumTokMaster) nil_not_mem_embBit
      · exact Or.inr (Or.inl ⟨X, X', ⟨hX, hX', embBit_subset.mp hsub⟩, hXne, hX'ne, rfl,
     rfl⟩)
      · exact absurd hsub (fun h => embBit_not_subset_cross (by decide) (A₁.ne Y hY) h)
    · rcases hW with rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩
      · exact absurd (hsub nil_mem_sumTokMaster) nil_not_mem_embBit
      · exact absurd hsub (fun h => embBit_not_subset_cross (by decide) (A₀.ne X hX) h)
      · exact Or.inr (Or.inr ⟨Y, Y', ⟨hY, hY', embBit_subset.mp hsub⟩, hYne, hY'ne, rfl,
     rfl⟩)

theorem oplusMapTok_proj (h0 : A₀.sys ? B₀.sys) (h1 : A₁.sys ? B₁.sys) :
    oplusMapTok h0.proj h1.proj = (oplusTok_subsystem h0 h1).proj := by
  have hsubM : ∀ {W : Set Str}, (B₀.oplus B₁).sys.mem W → W ⊆ sumTokMaster A₀.sys A₁.
    sys := by
    rintro W (rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩)
    · exact (show sumTokMaster B₀.sys B₁.sys = sumTokMaster A₀.sys A₁.sys by
        unfold sumTokMaster; rw [h0.master_eq, h1.master_eq]).subset
    · exact (embBit_subset.mpr (by rw [h0.master_eq]; exact B₀.sys.sub_master hX)).
    trans
        (embF_subset_sumTokMaster A₀.sys.master_mem)
    · exact (embBit_subset.mpr (by rw [h1.master_eq]; exact B₁.sys.sub_master hY)).
    trans
        (embT_subset_sumTokMaster A₁.sys.master_mem)
  apply ApproximableMap.ext
  intro W W'
  rw [Subsystem.proj_rel]
  constructor
  · rintro (⟨hW, rfl⟩ | ⟨X, X', ⟨hX, hX', hXs⟩, hXne, hX'ne, rfl, rfl⟩ |
      ⟨Y, Y', ⟨hY, hY', hYs⟩, hYne, hY'ne, rfl, rfl⟩)
    · exact ⟨hW, (A₀.oplus A₁).sys.master_mem, hsubM hW⟩
    · exact ⟨Or.inr (Or.inl ⟨X, hX, hXne, rfl⟩), Or.inr (Or.inl ⟨X', hX', hX'ne, rfl⟩),
        embBit_subset.mpr hXs⟩
    · exact ⟨Or.inr (Or.inr ⟨Y, hY, hYne, rfl⟩), Or.inr (Or.inr ⟨Y', hY', hY'ne, rfl⟩),
```

```
        embBit_subset.mpr hYs⟩
  · rintro ⟨hW, hW', hsub⟩
    rcases hW' with rfl | ⟨X', hX', hX'ne, rfl⟩ | ⟨Y', hY', hY'ne, rfl⟩
    · exact Or.inl ⟨hW, rfl⟩
    · rcases hW with rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩
      · exact absurd (hsub nil_mem_sumTokMaster) nil_not_mem_embBit
      · exact Or.inr (Or.inl ⟨X, X', ⟨hX, hX', embBit_subset.mp hsub⟩, hXne, hX'ne, rfl,
     rfl⟩)
      · exact absurd hsub (fun h => embBit_not_subset_cross (by decide) (B₁.ne Y hY) h)
    · rcases hW with rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩
      · exact absurd (hsub nil_mem_sumTokMaster) nil_not_mem_embBit
      · exact absurd hsub (fun h => embBit_not_subset_cross (by decide) (B₀.ne X hX) h)
      · exact Or.inr (Or.inr ⟨Y, Y', ⟨hY, hY', embBit_subset.mp hsub⟩, hYne, hY'ne, rfl,
     rfl⟩)

theorem otimesMapTok_inj (h0 : A₀.sys ? B₀.sys) (h1 : A₁.sys ? B₁.sys) :
    otimesMapTok h0.inj h1.inj = (otimesTok_subsystem h0 h1).inj := by
  apply ApproximableMap.ext
  intro W W'
  rw [Subsystem.inj_rel]
  constructor
  · rintro (⟨hW, rfl⟩ |
      ⟨X, Y, X', Y', ⟨hX, hX', hXs⟩, ⟨hY, hY', hYs⟩, hXne, hYne, hX'ne, hY'ne, rfl, rfl⟩
    )
    · refine ⟨hW, (B₀.otimes B₁).sys.master_mem, ?_⟩
      rcases hW with rfl | ⟨P, Q, hP, hQ, hPne, hQne, rfl⟩
      · exact (show prodTokNbhd A₀.sys.master A₁.sys.master
            = prodTokNbhd B₀.sys.master B₁.sys.master by rw [h0.master_eq, h1.master_eq
    ]).subset
      · exact prodTokNbhd_subset_iff.mpr ⟨B₀.sys.sub_master (h0.sub hP),
          B₁.sys.sub_master (h1.sub hQ)⟩
    · exact ⟨Or.inr ⟨X, Y, hX, hY, hXne, hYne, rfl⟩, Or.inr ⟨X', Y', hX', hY', hX'ne, hY
    'ne, rfl⟩,
        prodTokNbhd_subset_iff.mpr ⟨hXs, hYs⟩⟩
  · rintro ⟨hW, hW', hsub⟩
    rcases hW' with rfl | ⟨X', Y', hX', hY', hX'ne, hY'ne, rfl⟩
    · exact Or.inl ⟨hW, rfl⟩
    · rcases hW with rfl | ⟨X, Y, hX, hY, hXne, hYne, rfl⟩
      · obtain ⟨hsX, _⟩ := prodTokNbhd_subset_iff.mp hsub
        exact absurd (Set.Subset.antisymm (B₀.sys.sub_master hX')
          (by rw [← h0.master_eq]; exact hsX)) hX'ne
      · obtain ⟨hXs, hYs⟩ := prodTokNbhd_subset_iff.mp hsub
        exact Or.inr ⟨X, Y, X', Y', ⟨hX, hX', hXs⟩, ⟨hY, hY', hYs⟩,
          hXne, hYne, hX'ne, hY'ne, rfl, rfl⟩

theorem otimesMapTok_proj (h0 : A₀.sys ? B₀.sys) (h1 : A₁.sys ? B₁.sys) :
    otimesMapTok h0.proj h1.proj = (otimesTok_subsystem h0 h1).proj := by
  apply ApproximableMap.ext
  intro W W'
  rw [Subsystem.proj_rel]
  constructor
  · rintro (⟨hW, rfl⟩ |
      ⟨X, Y, X', Y', ⟨hX, hX', hXs⟩, ⟨hY, hY', hYs⟩, hXne, hYne, hX'ne, hY'ne, rfl, rfl⟩
    )
    · refine ⟨hW, (A₀.otimes A₁).sys.master_mem, ?_⟩
      rcases hW with rfl | ⟨P, Q, hP, hQ, hPne, hQne, rfl⟩
```

```
      · exact (show prodTokNbhd B₀.sys.master B₁.sys.master
            = prodTokNbhd A₀.sys.master A₁.sys.master by rw [h0.master_eq, h1.master_eq
    ]).subset
      · exact prodTokNbhd_subset_iff.mpr ⟨by rw [h0.master_eq]; exact B₀.sys.sub_master
    hP,
          by rw [h1.master_eq]; exact B₁.sys.sub_master hQ⟩
    · exact ⟨Or.inr ⟨X, Y, hX, hY, hXne, hYne, rfl⟩, Or.inr ⟨X', Y', hX', hY', hX'ne, hY
    'ne, rfl⟩,
        prodTokNbhd_subset_iff.mpr ⟨hXs, hYs⟩⟩
  · rintro ⟨hW, hW', hsub⟩
    rcases hW' with rfl | ⟨X', Y', hX', hY', hX'ne, hY'ne, rfl⟩
    · exact Or.inl ⟨hW, rfl⟩
    · rcases hW with rfl | ⟨X, Y, hX, hY, hXne, hYne, rfl⟩
      · obtain ⟨hsX, _⟩ := prodTokNbhd_subset_iff.mp hsub
        exact absurd (Set.Subset.antisymm (A₀.sys.sub_master hX')
          (by rw [h0.master_eq]; exact hsX)) hX'ne
      · obtain ⟨hXs, hYs⟩ := prodTokNbhd_subset_iff.mp hsub
        exact Or.inr ⟨X, Y, X', Y', ⟨hX, hX', hXs⟩, ⟨hY, hY', hYs⟩,
          hXne, hYne, hX'ne, hY'ne, rfl, rfl⟩

theorem prodMapTok_inj (h0 : A₀.sys ? B₀.sys) (h1 : A₁.sys ? B₁.sys) :
    prodMapTok h0.inj h1.inj = (prodTok_subsystem h0 h1).inj := by
  apply ApproximableMap.ext
  intro W W'
  rw [Subsystem.inj_rel]
  constructor
  · rintro ⟨X, Y, X', Y', ⟨hX, hX', hXs⟩, ⟨hY, hY', hYs⟩, rfl, rfl⟩
    exact ⟨prodTok_mem_prodTokNbhd hX hY, prodTok_mem_prodTokNbhd hX' hY',
      prodTokNbhd_subset_iff.mpr ⟨hXs, hYs⟩⟩
  · rintro ⟨⟨X, Y, hX, hY, rfl⟩, ⟨X', Y', hX', hY', rfl⟩, hsub⟩
    obtain ⟨hXs, hYs⟩ := prodTokNbhd_subset_iff.mp hsub
    exact ⟨X, Y, X', Y', ⟨hX, hX', hXs⟩, ⟨hY, hY', hYs⟩, rfl, rfl⟩

theorem prodMapTok_proj (h0 : A₀.sys ? B₀.sys) (h1 : A₁.sys ? B₁.sys) :
    prodMapTok h0.proj h1.proj = (prodTok_subsystem h0 h1).proj := by
  apply ApproximableMap.ext
  intro W W'
  rw [Subsystem.proj_rel]
  constructor
  · rintro ⟨X, Y, X', Y', ⟨hX, hX', hXs⟩, ⟨hY, hY', hYs⟩, rfl, rfl⟩
    exact ⟨prodTok_mem_prodTokNbhd hX hY, prodTok_mem_prodTokNbhd hX' hY',
      prodTokNbhd_subset_iff.mpr ⟨hXs, hYs⟩⟩
  · rintro ⟨⟨X, Y, hX, hY, rfl⟩, ⟨X', Y', hX', hY', rfl⟩, hsub⟩
    obtain ⟨hXs, hYs⟩ := prodTokNbhd_subset_iff.mp hsub
    exact ⟨X, Y, X', Y', ⟨hX, hX', hXs⟩, ⟨hY, hY', hYs⟩, rfl, rfl⟩

section Uniqueness

variable {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master)

def rho (n : ℕ) : ApproximableMap (Exp N hN).sys (Exp N hN).sys :=
  (expSub hN n).inj.comp (expSub hN n).proj

theorem rho_rel (n : ℕ) {A E : Set Str} :
    (rho hN n).rel A E ↔ (Exp N hN).sys.mem A ∧ (Exp N hN).sys.mem E ∧
      ∃ z, (gTower (Texp N) n).sys.mem z ∧ A ⊆ z ∧ z ⊆ E := by
```

```
  unfold rho
  rw [comp_rel]
  constructor
  · rintro ⟨z, hproj, hinj⟩
    rw [Subsystem.proj_rel] at hproj
    rw [Subsystem.inj_rel] at hinj
    obtain ⟨hcA, hTz, hAz⟩ := hproj
    obtain ⟨_, hcE, hzE⟩ := hinj
    exact ⟨hcA, hcE, z, hTz, hAz, hzE⟩
  · rintro ⟨hcA, hcE, z, hTz, hAz, hzE⟩
    exact ⟨z, by rw [Subsystem.proj_rel]; exact ⟨hcA, hTz, hAz⟩,
      by rw [Subsystem.inj_rel]; exact ⟨hTz, hcE, hzE⟩⟩

theorem rho_mono {n m : ℕ} (h : n ≤ m) {A E : Set Str} (hr : (rho hN n).rel A E) :
    (rho hN m).rel A E := by
  rw [rho_rel] at hr ⊢
  obtain ⟨hcA, hcE, z, hTz, hAz, hzE⟩ := hr
  exact ⟨hcA, hcE, z, (gTower_le (Texp N) (Texp_rooted hN) h).sub hTz, hAz, hzE⟩

def iSupRho : ApproximableMap (Exp N hN).sys (Exp N hN).sys :=
  iSupMap (rho hN) (fun i j => ⟨max i j,
    fun _ _ h => rho_mono hN (le_max_left i j) h,
    fun _ _ h => rho_mono hN (le_max_right i j) h⟩)

theorem iSupRho_eq_id : iSupRho hN = idMap (Exp N hN).sys := by
  apply ApproximableMap.ext
  intro A E
  rw [idMap_rel]
  constructor
  · rintro ⟨n, hr⟩
    rw [rho_rel] at hr
    obtain ⟨hcA, hcE, z, _, hAz, hzE⟩ := hr
    exact ⟨hcA, hcE, hAz.trans hzE⟩
  · rintro ⟨hcA, hcE, hAE⟩
    obtain ⟨n, hA⟩ := hcA
    exact ⟨n, (rho_rel hN n).mpr ⟨⟨n, hA⟩, hcE, A, hA, subset_rfl, hAE⟩⟩

theorem rho_zero_rel {A E : Set Str} :
    (rho hN 0).rel A E ↔ (Exp N hN).sys.mem A ∧ E = (Exp N hN).sys.master := by
  rw [rho_rel]
  constructor
  · rintro ⟨hcA, hcE, z, hz, _, hzE⟩
    have hzm : z = (Exp N hN).sys.master :=
      (hz : z = gFix (Texp N)).trans (gColim_master (Texp N) (Texp_rooted hN)).symm
    subst hzm
    exact ⟨hcA, Set.Subset.antisymm ((Exp N hN).sys.sub_master hcE) hzE⟩
  · rintro ⟨hcA, rfl⟩
    exact ⟨hcA, (Exp N hN).sys.master_mem, (Exp N hN).sys.master,
      gColim_master (Texp N) (Texp_rooted hN), (Exp N hN).sys.sub_master hcA,
    subset_rfl⟩

end Uniqueness

section Uniqueness

variable {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master)
```

```
variable (B : TAlgebra (TexpF N))

theorem gcomp_rho_zero (g : AlgHom (ExpAlg N hN) B) :
    g.hom.1.comp (rho hN 0) = descRel hN B 0 := by
  apply ApproximableMap.ext
  intro A Z
  rw [comp_rel]
  constructor
  · rintro ⟨E, hrho, hg⟩
    rw [rho_zero_rel] at hrho
    obtain ⟨hcA, rfl⟩ := hrho
    have hZ : Z = B.carrier.sys.master := g.hom.2 hg
    exact ⟨hcA, by rw [NeighborhoodSystem.mem_bot]; exact hZ⟩
  · rintro ⟨hcA, hZ⟩
    rw [NeighborhoodSystem.mem_bot] at hZ
    subst hZ
    exact ⟨(Exp N hN).sys.master, (rho_zero_rel hN).mpr ⟨hcA, rfl⟩, g.hom.1.master_rel⟩

end Uniqueness

end Exercise619
end

section
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB DomainTheory.NeighbourhoodSystems.Exercise510

namespace Exercise619

theorem Subsystem.self_inj {α : Type*} {D : NeighborhoodSystem α} (h : D ? D) :
    h.inj = idMap D := by
  apply ApproximableMap.ext
  intro X Y
  rw [Subsystem.inj_rel, idMap_rel]



theorem Subsystem.self_proj {α : Type*} {D : NeighborhoodSystem α} (h : D ? D) :
    h.proj = idMap D := by
  apply ApproximableMap.ext
  intro X Y
  rw [Subsystem.proj_rel, idMap_rel]

end Exercise619
end

section
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB DomainTheory.NeighbourhoodSystems.Exercise510

namespace Exercise619

variable {A₀ A₁ B₀ B₁ : ScottSys}

theorem sumMapTok_inj (h0 : A₀.sys ? B₀.sys) (h1 : A₁.sys ? B₁.sys) :
    sumMapTok h0.inj h1.inj = (sumTok_subsystem h0 h1).inj := by
```

```
  have hsubM : ∀ {W : Set Str}, (A₀.sum A₁).sys.mem W → W ⊆ sumTokMaster B₀.sys B₁.sys
     := by
    rintro W (rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩)
    · exact (show sumTokMaster A₀.sys A₁.sys = sumTokMaster B₀.sys B₁.sys by
        unfold sumTokMaster; rw [h0.master_eq, h1.master_eq]).subset
    · exact embF_subset_sumTokMaster (h0.sub hX)
    · exact embT_subset_sumTokMaster (h1.sub hY)
  apply ApproximableMap.ext
  intro W W'
  rw [Subsystem.inj_rel]
  constructor
  · rintro (⟨hW, rfl⟩ | ⟨X, X', ⟨hX, hX', hXsub⟩, rfl, rfl⟩ | ⟨Y, Y', ⟨hY, hY', hYsub⟩,
    rfl, rfl⟩)
    · exact ⟨hW, (B₀.sum B₁).sys.master_mem, hsubM hW⟩
    · exact ⟨Or.inr (Or.inl ⟨X, hX, rfl⟩), Or.inr (Or.inl ⟨X', hX', rfl⟩), embBit_subset.
    mpr hXsub⟩
    · exact ⟨Or.inr (Or.inr ⟨Y, hY, rfl⟩), Or.inr (Or.inr ⟨Y', hY', rfl⟩), embBit_subset.
    mpr hYsub⟩
  · rintro ⟨hW, hW', hsub⟩
    rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
    · exact Or.inl ⟨hW, rfl⟩
    · rcases hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
      · exact absurd (hsub nil_mem_sumTokMaster) nil_not_mem_embBit
      · exact Or.inr (Or.inl ⟨X, X', ⟨hX, hX', embBit_subset.mp hsub⟩, rfl, rfl⟩)
      · exact absurd hsub (fun h => embBit_not_subset_cross (by decide) (A₁.ne Y hY) h)
    · rcases hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
      · exact absurd (hsub nil_mem_sumTokMaster) nil_not_mem_embBit
      · exact absurd hsub (fun h => embBit_not_subset_cross (by decide) (A₀.ne X hX) h)
      · exact Or.inr (Or.inr ⟨Y, Y', ⟨hY, hY', embBit_subset.mp hsub⟩, rfl, rfl⟩)

theorem GExpr.map_inj : (T : GExpr) → {X Y : ScottSys} → (h : X.sys ? Y.sys) →
    T.map h.inj = (T.obj_subsystem h).inj
  | .const D, _, _, _ => (Subsystem.self_inj (Subsystem.refl D.sys)).symm
  | .var, _, _, _ => rfl
  | .sum a b, _, _, h => by
      show sumMapTok (a.map h.inj) (b.map h.inj)
          = (sumTok_subsystem (a.obj_subsystem h) (b.obj_subsystem h)).inj
      rw [a.map_inj h, b.map_inj h, sumMapTok_inj]
  | .prod a b, _, _, h => by
      show prodMapTok (a.map h.inj) (b.map h.inj)
          = (prodTok_subsystem (a.obj_subsystem h) (b.obj_subsystem h)).inj
      rw [a.map_inj h, b.map_inj h, prodMapTok_inj]
  | .oplus a b, _, _, h => by
      show oplusMapTok (a.map h.inj) (b.map h.inj)
          = (oplusTok_subsystem (a.obj_subsystem h) (b.obj_subsystem h)).inj
      rw [a.map_inj h, b.map_inj h, oplusMapTok_inj]
  | .otimes a b, _, _, h => by
      show otimesMapTok (a.map h.inj) (b.map h.inj)
          = (otimesTok_subsystem (a.obj_subsystem h) (b.obj_subsystem h)).inj
      rw [a.map_inj h, b.map_inj h, otimesMapTok_inj]

theorem sumMapTok_proj (h0 : A₀.sys ? B₀.sys) (h1 : A₁.sys ? B₁.sys) :
    sumMapTok h0.proj h1.proj = (sumTok_subsystem h0 h1).proj := by
  have hsubM : ∀ {W : Set Str}, (B₀.sum B₁).sys.mem W → W ⊆ sumTokMaster A₀.sys A₁.sys
     := by
    rintro W (rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩)
```

```
    · exact (show sumTokMaster B₀.sys B₁.sys = sumTokMaster A₀.sys A₁.sys by
        unfold sumTokMaster; rw [h0.master_eq, h1.master_eq]).subset
    · exact (embBit_subset.mpr (by rw [h0.master_eq]; exact B₀.sys.sub_master hX)).
    trans
        (embF_subset_sumTokMaster A₀.sys.master_mem)
    · exact (embBit_subset.mpr (by rw [h1.master_eq]; exact B₁.sys.sub_master hY)).
    trans
        (embT_subset_sumTokMaster A₁.sys.master_mem)
  apply ApproximableMap.ext
  intro W W'
  rw [Subsystem.proj_rel]
  constructor
  · rintro (⟨hW, rfl⟩ | ⟨X, X', ⟨hX, hX', hXsub⟩, rfl, rfl⟩ | ⟨Y, Y', ⟨hY, hY', hYsub⟩,
    rfl, rfl⟩)
    · exact ⟨hW, (A₀.sum A₁).sys.master_mem, hsubM hW⟩
    · exact ⟨Or.inr (Or.inl ⟨X, hX, rfl⟩), Or.inr (Or.inl ⟨X', hX', rfl⟩), embBit_subset.
    mpr hXsub⟩
    · exact ⟨Or.inr (Or.inr ⟨Y, hY, rfl⟩), Or.inr (Or.inr ⟨Y', hY', rfl⟩), embBit_subset.
    mpr hYsub⟩
  · rintro ⟨hW, hW', hsub⟩
    rcases hW' with rfl | ⟨X', hX', rfl⟩ | ⟨Y', hY', rfl⟩
    · exact Or.inl ⟨hW, rfl⟩
    · rcases hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
      · exact absurd (hsub nil_mem_sumTokMaster) nil_not_mem_embBit
      · exact Or.inr (Or.inl ⟨X, X', ⟨hX, hX', embBit_subset.mp hsub⟩, rfl, rfl⟩)
      · exact absurd hsub (fun h => embBit_not_subset_cross (by decide) (B₁.ne Y hY) h)
    · rcases hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
      · exact absurd (hsub nil_mem_sumTokMaster) nil_not_mem_embBit
      · exact absurd hsub (fun h => embBit_not_subset_cross (by decide) (B₀.ne X hX) h)
      · exact Or.inr (Or.inr ⟨Y, Y', ⟨hY, hY', embBit_subset.mp hsub⟩, rfl, rfl⟩)

theorem GExpr.map_proj : (T : GExpr) → {X Y : ScottSys} → (h : X.sys ? Y.sys) →
    T.map h.proj = (T.obj_subsystem h).proj
  | .const D, _, _, _ => (Subsystem.self_proj (Subsystem.refl D.sys)).symm
  | .var, _, _, _ => rfl
  | .sum a b, _, _, h => by
      show sumMapTok (a.map h.proj) (b.map h.proj)
          = (sumTok_subsystem (a.obj_subsystem h) (b.obj_subsystem h)).proj
      rw [a.map_proj h, b.map_proj h, sumMapTok_proj]
  | .prod a b, _, _, h => by
      show prodMapTok (a.map h.proj) (b.map h.proj)
          = (prodTok_subsystem (a.obj_subsystem h) (b.obj_subsystem h)).proj
      rw [a.map_proj h, b.map_proj h, prodMapTok_proj]
  | .oplus a b, _, _, h => by
      show oplusMapTok (a.map h.proj) (b.map h.proj)
          = (oplusTok_subsystem (a.obj_subsystem h) (b.obj_subsystem h)).proj
      rw [a.map_proj h, b.map_proj h, oplusMapTok_proj]
  | .otimes a b, _, _, h => by
      show otimesMapTok (a.map h.proj) (b.map h.proj)
          = (otimesTok_subsystem (a.obj_subsystem h) (b.obj_subsystem h)).proj
      rw [a.map_proj h, b.map_proj h, otimesMapTok_proj]

section Uniqueness

variable {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master)
```

```
theorem map_rho_eq (n : ℕ) :
    (Texp N).map (rho hN n)
      = ((Texp N).obj_subsystem (expSub hN n)).inj.comp
        ((Texp N).obj_subsystem (expSub hN n)).proj := by
  unfold rho
  rw [(Texp N).map_comp (expSub hN n).proj (Subsystem.inj_isStrict (expSub hN n)),
      (Texp N).map_inj, (Texp N).map_proj]

theorem key_rho (n : ℕ) :
    rho hN (n + 1)
      = (expHom N hN).comp (((Texp N).map (rho hN n)).comp (expInv N hN)) := by
  have hsyseq : ((Texp N).obj (Exp N hN)).sys = (Exp N hN).sys :=
    gColim_obj_sys_eq (Texp N) (Texp_rooted hN)
  apply ApproximableMap.ext
  intro A E
  rw [map_rho_eq]
  simp only [comp_rel, rho_rel, expInv_rel, expHom_rel, Subsystem.proj_rel,
    Subsystem.inj_rel, hsyseq]
  constructor
  · rintro ⟨hcA, hcE, z, hTz, hAz, hzE⟩
    exact ⟨E, ⟨A, ⟨hcA, hcA, subset_rfl⟩, z, ⟨hcA, hTz, hAz⟩, hTz, hcE, hzE⟩,
      hcE, hcE, subset_rfl⟩
  · rintro ⟨Y, ⟨C, ⟨hcA, _, hAC⟩, z, ⟨_, hTz, hCz⟩, _, _, hzY⟩, _, hcE, hYE⟩
    exact ⟨hcA, hcE, z, hTz, hAC.trans hCz, hzY.trans hYE⟩

end Uniqueness

section Uniqueness

variable {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master)

variable (B : TAlgebra (TexpF N))

theorem gcomp_rho_succ (g : AlgHom (ExpAlg N hN) B) (n : ℕ) :
    g.hom.1.comp (rho hN (n + 1))
      = (algStr B).comp (((Texp N).map (g.hom.1.comp (rho hN n))).comp (expInv N hN))
    := by
  have hcomm : (g.hom.1).comp (expHom N hN) = (algStr B).comp ((Texp N).map g.hom.1)
    :=
    congrArg Subtype.val g.comm
  calc g.hom.1.comp (rho hN (n + 1))
      = g.hom.1.comp ((expHom N hN).comp
          (((Texp N).map (rho hN n)).comp (expInv N hN))) := by rw [key_rho]
    _ = (g.hom.1.comp (expHom N hN)).comp
          (((Texp N).map (rho hN n)).comp (expInv N hN)) :=
        (comp_assoc _ _ _).symm
    _ = ((algStr B).comp ((Texp N).map g.hom.1)).comp
          (((Texp N).map (rho hN n)).comp (expInv N hN)) :=
        congrArg (fun m => m.comp (((Texp N).map (rho hN n)).comp (expInv N hN)))
    hcomm
    _ = (algStr B).comp (((Texp N).map g.hom.1).comp
          (((Texp N).map (rho hN n)).comp (expInv N hN))) := comp_assoc _ _ _
    _ = (algStr B).comp ((((Texp N).map g.hom.1).comp ((Texp N).map (rho hN n))).comp
          (expInv N hN)) :=
        congrArg ((algStr B).comp ·)
          (comp_assoc ((Texp N).map g.hom.1) ((Texp N).map (rho hN n)) (expInv N hN)).
```

```
    symm
    _ = (algStr B).comp (((Texp N).map (g.hom.1.comp (rho hN n))).comp (expInv N hN))
    :=
        congrArg (fun m => (algStr B).comp (m.comp (expInv N hN)))
          ((Texp N).map_comp (rho hN n) g.hom.2).symm

theorem gcomp_rho_eq (g : AlgHom (ExpAlg N hN) B) :
    ∀ n, g.hom.1.comp (rho hN n) = descRel hN B n
  | 0 => gcomp_rho_zero hN B g
  | n + 1 => by rw [gcomp_rho_succ hN B g n, gcomp_rho_eq g n, ← descRel_succ]

theorem descMap_eq_algHom (g : AlgHom (ExpAlg N hN) B) : g.hom.1 = descMap hN B := by
  have hcomp : g.hom.1.comp (iSupRho hN) = descMap hN B := by
    apply ApproximableMap.ext
    intro A E
    rw [comp_rel, descMap_rel]
    constructor
    · rintro ⟨Y, ⟨n, hrho⟩, hg⟩
      refine ⟨n, ?_⟩
      rw [← gcomp_rho_eq hN B g n, comp_rel]
      exact ⟨Y, hrho, hg⟩
    · rintro ⟨n, hn⟩
      rw [← gcomp_rho_eq hN B g n, comp_rel] at hn
      obtain ⟨Y, hrho, hg⟩ := hn
      exact ⟨Y, ⟨n, hrho⟩, hg⟩
  calc g.hom.1 = g.hom.1.comp (iSupRho hN) := by
        rw [iSupRho_eq_id hN]; exact (comp_idMap g.hom.1).symm
    _ = descMap hN B := hcomp

end Uniqueness

end Exercise619
end
end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 6.22. Comment on these domain equations:

$$N \cong \{\{0\}, \{0, \Lambda\}\} \oplus N,$$

$$M \cong \{\{\Lambda\}\} + M,$$

$$N^* \cong N \oplus (N \otimes N^*).$$

3.7.25 Exercise 6.23 — syntactic expression domain

Exercise_6_23.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_22

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Proposition_6_6
```

```
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise619
section
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB DomainTheory.NeighbourhoodSystems.Exercise510
namespace Exercise619
variable {A₀ A₁ B₀ B₁ : ScottSys}
section Uniqueness
variable {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master)
variable (B : TAlgebra (TexpF N))

def ExpInitial : IsInitial (ExpAlg N hN) where
  desc B := descAlgHom hN B
  uniq B g := algHom_ext (Subtype.ext (descMap_eq_algHom hN B g))

end Uniqueness

end Exercise619
end

section
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB DomainTheory.NeighbourhoodSystems.Exercise510

namespace Exercise619

theorem Subsystem.proj_isStrict {α : Type*} {D E : NeighborhoodSystem α} (h : D ? E) :
    IsStrict h.proj := by
  intro X hrel
  rw [Subsystem.proj_rel] at hrel
  obtain ⟨_, hXD, hsub⟩ := hrel
  exact Set.Subset.antisymm (D.sub_master hXD) (by rw [h.master_eq]; exact hsub)

theorem expHom_comp_expInv (N : ScottSys) (hN : ([] : Str) ∈ N.sys.master) :
    (expHom N hN).comp (expInv N hN) = idMap (Exp N hN).sys := by
  have h := congrArg (Subtype.val) (ExpIso N hN).inv_hom_id
  exact h

section Existence

variable {N : ScottSys} (hN : ([] : Str) ∈ N.sys.master) (B : TAlgebra (TexpF N))

theorem algHom_fix (g : AlgHom (ExpAlg N hN) B) :
    g.hom.1 = (algStr B).comp (((Texp N).map g.hom.1).comp (expInv N hN)) := by
  have hcomm : (g.hom.1).comp (expHom N hN) = (algStr B).comp ((Texp N).map g.hom.1)
    :=
    congrArg Subtype.val g.comm
  calc g.hom.1
      = (g.hom.1).comp (idMap (Exp N hN).sys) := (comp_idMap _).symm
    _ = (g.hom.1).comp ((expHom N hN).comp (expInv N hN)) := by rw [expHom_comp_expInv
    ]
    _ = ((g.hom.1).comp (expHom N hN)).comp (expInv N hN) := (comp_assoc _ _ _).symm
```

```
    _ = ((algStr B).comp ((Texp N).map g.hom.1)).comp (expInv N hN) :=
          congrArg (fun m => m.comp (expInv N hN)) hcomm
    _ = (algStr B).comp (((Texp N).map g.hom.1).comp (expInv N hN)) := comp_assoc _ _
    _

theorem descRel_le_algHom (g : AlgHom (ExpAlg N hN) B) : ∀ n, descRel hN B n ≤ g.hom.1
  | 0 => constBot_le _
  | n + 1 => by
      rw [descRel_succ, algHom_fix hN B g]
      exact comp_mono_gen le_rfl
        (comp_mono_gen ((Texp N).map_mono (descRel_le_algHom g n)) le_rfl)

theorem descMap_le_algHom (g : AlgHom (ExpAlg N hN) B) : descMap hN B ≤ g.hom.1 := by
  intro X Y hr
  obtain ⟨n, hn⟩ := hr
  exact descRel_le_algHom hN B g n X Y hn

end Existence

end Exercise619
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise619
section
set_option linter.unusedVariables false

theorem example_623 : ∀ {N : DomainTheory.NeighbourhoodSystems.Exercise619.ScottSys}
  (hN :
    @Membership.mem (List Bool) (Set DomainTheory.NeighbourhoodSystems.ExampleB.Str)
      (@Set.instMembership DomainTheory.NeighbourhoodSystems.ExampleB.Str)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.master DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
        N.sys)
      (@List.nil Bool))
  (B :
    @DomainTheory.NeighbourhoodSystems.TAlgebra DomainTheory.NeighbourhoodSystems.
    Exercise619.ScottSys
      DomainTheory.NeighbourhoodSystems.Exercise619.instCategoryScottSys
      (DomainTheory.NeighbourhoodSystems.Exercise619.TexpF N))
  (g :
    @DomainTheory.NeighbourhoodSystems.AlgHom DomainTheory.NeighbourhoodSystems.
    Exercise619.ScottSys
      DomainTheory.NeighbourhoodSystems.Exercise619.instCategoryScottSys
      (DomainTheory.NeighbourhoodSystems.Exercise619.TexpF N)
      (DomainTheory.NeighbourhoodSystems.Exercise619.ExpAlg N hN) B),
  @LE.le
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
      DomainTheory.NeighbourhoodSystems.ExampleB.Str (DomainTheory.
    NeighbourhoodSystems.Exercise619.Exp N hN).sys
      (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier DomainTheory.
    NeighbourhoodSystems.Exercise619.ScottSys
          DomainTheory.NeighbourhoodSystems.Exercise619.instCategoryScottSys
          (DomainTheory.NeighbourhoodSystems.Exercise619.TexpF N) B).sys)
    (@Preorder.toLE
```

```
  (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.ExampleB.Str
    DomainTheory.NeighbourhoodSystems.ExampleB.Str (DomainTheory.
NeighbourhoodSystems.Exercise619.Exp N hN).sys
    (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier DomainTheory.
NeighbourhoodSystems.Exercise619.ScottSys
       DomainTheory.NeighbourhoodSystems.Exercise619.instCategoryScottSys
       (DomainTheory.NeighbourhoodSystems.Exercise619.TexpF N) B).sys)
  (@PartialOrder.toPreorder
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.ExampleB.Str
     DomainTheory.NeighbourhoodSystems.ExampleB.Str (DomainTheory.
NeighbourhoodSystems.Exercise619.Exp N hN).sys
     (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier DomainTheory.
NeighbourhoodSystems.Exercise619.ScottSys
        DomainTheory.NeighbourhoodSystems.Exercise619.instCategoryScottSys
        (DomainTheory.NeighbourhoodSystems.Exercise619.TexpF N) B).sys)
    (@DomainTheory.NeighbourhoodSystems.instPartialOrderApproximableMap
     DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
NeighbourhoodSystems.ExampleB.Str
     (DomainTheory.NeighbourhoodSystems.Exercise619.Exp N hN).sys
     (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier DomainTheory.
NeighbourhoodSystems.Exercise619.ScottSys
        DomainTheory.NeighbourhoodSystems.Exercise619.instCategoryScottSys
        (DomainTheory.NeighbourhoodSystems.Exercise619.TexpF N) B).sys)))
(@DomainTheory.NeighbourhoodSystems.Exercise619.descMap N hN B)
(@Subtype.val
  (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.ExampleB.Str
    DomainTheory.NeighbourhoodSystems.ExampleB.Str
    (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier DomainTheory.
NeighbourhoodSystems.Exercise619.ScottSys
       DomainTheory.NeighbourhoodSystems.Exercise619.instCategoryScottSys
       (DomainTheory.NeighbourhoodSystems.Exercise619.TexpF N)
       (DomainTheory.NeighbourhoodSystems.Exercise619.ExpAlg N hN)).sys
    (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier DomainTheory.
NeighbourhoodSystems.Exercise619.ScottSys
       DomainTheory.NeighbourhoodSystems.Exercise619.instCategoryScottSys
       (DomainTheory.NeighbourhoodSystems.Exercise619.TexpF N) B).sys)
  (fun
      (f :
       @DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.ExampleB.Str
         DomainTheory.NeighbourhoodSystems.ExampleB.Str
         (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier
             DomainTheory.NeighbourhoodSystems.Exercise619.ScottSys
             DomainTheory.NeighbourhoodSystems.Exercise619.instCategoryScottSys
             (DomainTheory.NeighbourhoodSystems.Exercise619.TexpF N)
             (DomainTheory.NeighbourhoodSystems.Exercise619.ExpAlg N hN)).sys
         (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier
             DomainTheory.NeighbourhoodSystems.Exercise619.ScottSys
             DomainTheory.NeighbourhoodSystems.Exercise619.instCategoryScottSys
             (DomainTheory.NeighbourhoodSystems.Exercise619.TexpF N) B).sys) =>
    @DomainTheory.NeighbourhoodSystems.Exercise510.IsStrict DomainTheory.
NeighbourhoodSystems.ExampleB.Str
      DomainTheory.NeighbourhoodSystems.ExampleB.Str
```

```
          (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier DomainTheory.
    NeighbourhoodSystems.Exercise619.ScottSys
              DomainTheory.NeighbourhoodSystems.Exercise619.instCategoryScottSys
              (DomainTheory.NeighbourhoodSystems.Exercise619.TexpF N)
              (DomainTheory.NeighbourhoodSystems.Exercise619.ExpAlg N hN)).sys
          (@DomainTheory.NeighbourhoodSystems.TAlgebra.carrier DomainTheory.
    NeighbourhoodSystems.Exercise619.ScottSys
              DomainTheory.NeighbourhoodSystems.Exercise619.instCategoryScottSys
              (DomainTheory.NeighbourhoodSystems.Exercise619.TexpF N) B).sys
          f)
      (@DomainTheory.NeighbourhoodSystems.AlgHom.hom DomainTheory.NeighbourhoodSystems
    .Exercise619.ScottSys
          DomainTheory.NeighbourhoodSystems.Exercise619.instCategoryScottSys
          (DomainTheory.NeighbourhoodSystems.Exercise619.TexpF N)
          (DomainTheory.NeighbourhoodSystems.Exercise619.ExpAlg N hN) B g)) :=
  @DomainTheory.NeighbourhoodSystems.Exercise619.descMap_le_algHom
end

end DomainTheory.NeighbourhoodSystems.Exercise619
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem DomainTheory.NeighbourhoodSystems.Exercise619
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB

section
namespace Exercise624

def Fsol (D E : ScottSys) : ScottSys := D.sum (D.prod E)

def Gsol (D E : ScottSys) : ScottSys := D.sum E

def gTok (p q : Set Str) : Set Str := insert ([] : Str) (embBit false p ∪ embBit true
    q)

def fTok (p q : Set Str) : Set Str := gTok p (gTok p q)

def pIter : ℕ → Set Str × Set Str
  | 0 => ({([] : Str)}, {([] : Str)})
  | n + 1 => (fTok (pIter n).1 (pIter n).2, gTok (pIter n).1 (pIter n).2)

def GammaD : Set Str := ⋃ n, (pIter n).1

def GammaE : Set Str := ⋃ n, (pIter n).2

theorem nil_mem_GammaD : ([] : Str) ∈ GammaD := Set.mem_iUnion.mpr ⟨0, rfl⟩

def Dsol : ScottSys := singletonSys GammaD ⟨[], nil_mem_GammaD⟩

theorem nil_mem_GammaE : ([] : Str) ∈ GammaE := Set.mem_iUnion.mpr ⟨0, rfl⟩

def Esol : ScottSys := singletonSys GammaE ⟨[], nil_mem_GammaE⟩

theorem gTok_mono {p p' q q' : Set Str} (hp : p ⊆ p') (hq : q ⊆ q') : gTok p q ⊆ gTok
     p' q' := by
  rintro w (rfl | ⟨w', rfl, hw'⟩ | ⟨w', rfl, hw'⟩)
  · exact Set.mem_insert _ _
```

```
  · exact Or.inr (Or.inl ⟨w', rfl, hp hw'⟩)
  · exact Or.inr (Or.inr ⟨w', rfl, hq hw'⟩)

theorem fTok_mono {p p' q q' : Set Str} (hp : p ⊆ p') (hq : q ⊆ q') : fTok p q ⊆ fTok
    p' q' :=
  gTok_mono hp (gTok_mono hp hq)

theorem master_Fsol : (Fsol Dsol Esol).sys.master = fTok GammaD GammaE := rfl

theorem master_Gsol : (Gsol Dsol Esol).sys.master = gTok GammaD GammaE := rfl

theorem nil_mem_fTok (p q : Set Str) : ([] : Str) ∈ fTok p q := Set.mem_insert _ _

theorem nil_mem_gTok (p q : Set Str) : ([] : Str) ∈ gTok p q := Set.mem_insert _ _

theorem mem_fTok_iUnion {a b : ℕ → Set Str} {w : Str}
    (hw : w ∈ fTok (⋃ n, a n) (⋃ n, b n)) : ∃ n, w ∈ fTok (a n) (b n) := by
  rcases hw with rfl | ⟨w', rfl, hw'⟩ | ⟨u, rfl, hu⟩
  · exact ⟨0, nil_mem_fTok _ _⟩
  · obtain ⟨n, hn⟩ := Set.mem_iUnion.mp hw'
    exact ⟨n, Or.inr (Or.inl ⟨w', rfl, hn⟩)⟩
  · rcases hu with rfl | ⟨u', rfl, hu'⟩ | ⟨u', rfl, hu'⟩
    · exact ⟨0, Or.inr (Or.inr ⟨[], rfl, nil_mem_gTok _ _⟩)⟩
    · obtain ⟨n, hn⟩ := Set.mem_iUnion.mp hu'
      exact ⟨n, Or.inr (Or.inr ⟨false :: u', rfl, Or.inr (Or.inl ⟨u', rfl, hn⟩)⟩)⟩
    · obtain ⟨n, hn⟩ := Set.mem_iUnion.mp hu'
      exact ⟨n, Or.inr (Or.inr ⟨true :: u', rfl, Or.inr (Or.inr ⟨u', rfl, hn⟩)⟩)⟩

theorem mem_gTok_iUnion {a b : ℕ → Set Str} {w : Str}
    (hw : w ∈ gTok (⋃ n, a n) (⋃ n, b n)) : ∃ n, w ∈ gTok (a n) (b n) := by
  rcases hw with rfl | ⟨w', rfl, hw'⟩ | ⟨w', rfl, hw'⟩
  · exact ⟨0, nil_mem_gTok _ _⟩
  · obtain ⟨n, hn⟩ := Set.mem_iUnion.mp hw'
    exact ⟨n, Or.inr (Or.inl ⟨w', rfl, hn⟩)⟩
  · obtain ⟨n, hn⟩ := Set.mem_iUnion.mp hw'
    exact ⟨n, Or.inr (Or.inr ⟨w', rfl, hn⟩)⟩

theorem pIter_fst_subset_GammaD (m : ℕ) : (pIter m).1 ⊆ GammaD :=
  fun _ hx => Set.mem_iUnion.mpr ⟨m, hx⟩

theorem pIter_snd_subset_GammaE (m : ℕ) : (pIter m).2 ⊆ GammaE :=
  fun _ hx => Set.mem_iUnion.mpr ⟨m, hx⟩

theorem fTok_GammaD_GammaE : fTok GammaD GammaE = GammaD := by
  apply Set.Subset.antisymm
  · intro w hw
    obtain ⟨n, hn⟩ :=
      mem_fTok_iUnion (a := fun n => (pIter n).1) (b := fun n => (pIter n).2) hw
    exact Set.mem_iUnion.mpr ⟨n + 1, hn⟩
  · intro w hw
    obtain ⟨n, hn⟩ := Set.mem_iUnion.mp hw
    cases n with
    | zero =>
        have hw0 : w = [] := hn; subst hw0; exact nil_mem_fTok _ _
    | succ m =>
        exact fTok_mono (pIter_fst_subset_GammaD m) (pIter_snd_subset_GammaE m) hn
```

```
theorem Dsol_subsystem : Dsol.sys ? (Fsol Dsol Esol).sys := by
  have hmaster : (Fsol Dsol Esol).sys.master = GammaD := master_Fsol.trans
    fTok_GammaD_GammaE
  refine ⟨hmaster.symm, ?_, ?_⟩
  · intro X hX
    have hXeq : X = GammaD := hX
    rw [hXeq, ← hmaster]
    exact (Fsol Dsol Esol).sys.master_mem
  · intro X Y hX hY _
    show X ∩ Y = GammaD
    rw [show X = GammaD from hX, show Y = GammaD from hY, Set.inter_self]

theorem gTok_GammaD_GammaE : gTok GammaD GammaE = GammaE := by
  apply Set.Subset.antisymm
  · intro w hw
    obtain ⟨n, hn⟩ :=
      mem_gTok_iUnion (a := fun n => (pIter n).1) (b := fun n => (pIter n).2) hw
    exact Set.mem_iUnion.mpr ⟨n + 1, hn⟩
  · intro w hw
    obtain ⟨n, hn⟩ := Set.mem_iUnion.mp hw
    cases n with
    | zero =>
        have hw0 : w = [] := hn; subst hw0; exact nil_mem_gTok _ _
    | succ m =>
        exact gTok_mono (pIter_fst_subset_GammaD m) (pIter_snd_subset_GammaE m) hn

theorem Esol_subsystem : Esol.sys ? (Gsol Dsol Esol).sys := by
  have hmaster : (Gsol Dsol Esol).sys.master = GammaE := master_Gsol.trans
    gTok_GammaD_GammaE
  refine ⟨hmaster.symm, ?_, ?_⟩
  · intro X hX
    have hXeq : X = GammaE := hX
    rw [hXeq, ← hmaster]
    exact (Gsol Dsol Esol).sys.master_mem
  · intro X Y hX hY _
    show X ∩ Y = GammaE
    rw [show X = GammaE from hX, show Y = GammaE from hY, Set.inter_self]

theorem exists_double_fixedPoint :
    ∃ Γd Γe : Set Str, ([] : Str) ∈ Γd ∧ ([] : Str) ∈ Γe ∧
      fTok Γd Γe = Γd ∧ gTok Γd Γe = Γe :=
  ⟨GammaD, GammaE, nil_mem_GammaD, nil_mem_GammaE, fTok_GammaD_GammaE,
    gTok_GammaD_GammaE⟩

end Exercise624
end
end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 6.23. Construe the initial solution to

$$Exp \cong N \oplus ((Exp \times Exp) + (Exp \times Exp))$$

as a "syntactical domain" of expressions generated from infinitely many "variables" by means of two

binary “operation symbols”. Given an algebra D with two operations

$$u : D \times D \to D \quad \text{and} \quad v : D \times D \to D,$$

show how any strict map $s : N \to D$ determines a unique map

$$val(s) : Exp \to D$$

that can be regarded as the “evaluation of an expression”.

3.7.26 Exercise 6.24 — recursive domain equations

Exercise_6_24.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_23
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Definition_6_13

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem DomainTheory.NeighbourhoodSystems.Exercise619
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB
section
namespace Exercise624

theorem exists_simultaneous_subsystems :
    ∃ D E : ScottSys, D.sys ? (D.sum (D.prod E)).sys ∧ E.sys ? (D.sum E).sys :=
  ⟨Dsol, Esol, Dsol_subsystem, Esol_subsystem⟩

end Exercise624
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise624
section
set_option linter.unusedVariables false

theorem example_624 : ∃ (D : DomainTheory.NeighbourhoodSystems.Exercise619.ScottSys) (E
     :
  DomainTheory.NeighbourhoodSystems.Exercise619.ScottSys),
  And
    (@DomainTheory.NeighbourhoodSystems.Subsystem DomainTheory.NeighbourhoodSystems.
    ExampleB.Str D.sys
      (D.sum (D.prod E)).sys)
    (@DomainTheory.NeighbourhoodSystems.Subsystem DomainTheory.NeighbourhoodSystems.
    ExampleB.Str E.sys (D.sum E).sys) :=
  DomainTheory.NeighbourhoodSystems.Exercise624.exists_simultaneous_subsystems
end

end DomainTheory.NeighbourhoodSystems.Exercise624
namespace DomainTheory.NeighbourhoodSystems
```

```
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise619
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB
open DomainTheory.NeighbourhoodSystems.Exercise510

section
namespace Exercise619

variable {D : NeighborhoodSystem Str}

def liftTokMaster (D : NeighborhoodSystem Str) : Set Str := insert [] (embBit false D.
    master)

theorem embF_subset_liftTokMaster {X : Set Str} (hX : D.mem X) :
    embBit false X ⊆ liftTokMaster D :=
  (embBit_subset.mpr (D.sub_master hX)).trans (Set.subset_insert _ _)

theorem liftTokMaster_inter_embF {X : Set Str} (hX : D.mem X) :
    liftTokMaster D ∩ embBit false X = embBit false X :=
  Set.inter_eq_right.mpr (embF_subset_liftTokMaster hX)

theorem nil_mem_liftTokMaster : ([] : Str) ∈ liftTokMaster D := Set.mem_insert _ _

theorem embF_ne_liftTokMaster {X : Set Str} : embBit false X = liftTokMaster D := fun
    h =>
  nil_not_mem_embBit (h.symm ▶ nil_mem_liftTokMaster)

end Exercise619
end
end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 6.24. Show that there must exist domains satisfying:

$$D \cong D + (D \times E), \quad \text{and}$$

$$E \cong D + E,$$

by using a double fixed-point method. First decide what the underlying set of tokens should be, and then define D and E by simultaneous fixed points. (Syntactical domains as in 6.23 may very well require several simultaneous equations.)

3.7.27 Exercise 6.25 — projection pair laws

Exercise_6_25.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Lemma_6_15

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
```

```
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_27

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap Subsystem
section
variable {α : Type*} {D E : NeighborhoodSystem α}
namespace Subsystem.ProjectionPair

theorem inj_bounded (P : ProjectionPair D E) {S : Set D.Element} (hS : D.Bounded S) :
    E.Bounded (P.inj.toElementMap '' S) := by
  obtain ⟨b, hb⟩ := hS
  refine ⟨P.inj.toElementMap b, ?_⟩
  rintro _ ⟨s, hs, rfl⟩
  exact P.inj.toElementMap_mono (hb s hs)

theorem inj_proj_apply_le (P : ProjectionPair D E) (y : E.Element) :
    P.inj.toElementMap (P.proj.toElementMap y) ≤ y := by
  have h := (le_iff_toElementMap_le.mp P.inj_comp_proj_le) y
  rwa [toElementMap_comp, toElementMap_idMap] at h

theorem proj_inj_apply (P : ProjectionPair D E) (x : D.Element) :
    P.proj.toElementMap (P.inj.toElementMap x) = x := by
  rw [← toElementMap_comp, P.proj_comp_inj, toElementMap_idMap]

theorem galois (P : ProjectionPair D E) (x : D.Element) (y : E.Element) :
    P.inj.toElementMap x ≤ y ↔ x ≤ P.proj.toElementMap y := by
  constructor
  · intro hxy
    have := P.proj.toElementMap_mono hxy
    rwa [P.proj_inj_apply x] at this
  · intro hxy
    exact (P.inj.toElementMap_mono hxy).trans (P.inj_proj_apply_le y)

theorem inj_sSup (P : ProjectionPair D E) {S : Set D.Element} (hS : D.Bounded S) :
    P.inj.toElementMap (D.sSup S hS) =
      E.sSup (P.inj.toElementMap '' S) (P.inj_bounded hS) := by
  apply le_antisymm
  · refine (P.galois _ _).mpr (D.sSup_le S hS fun s hs => ?_)
    refine (P.galois s _).mp ?_
    exact E.le_sSup _ (P.inj_bounded hS) ⟨s, hs, rfl⟩
  · refine E.sSup_le _ (P.inj_bounded hS) ?_
    rintro _ ⟨s, hs, rfl⟩
    exact P.inj.toElementMap_mono (D.le_sSup S hS hs)

theorem lowerSet_bounded (P : ProjectionPair D E) (y : E.Element) :
    D.Bounded (P.lowerSet y) :=
  ⟨P.proj.toElementMap y, fun _ hx => (P.galois _ y).mp hx⟩

theorem lowerSet_directed (P : ProjectionPair D E) (y : E.Element) :
    ∀ a ∈ P.lowerSet y, ∀ b ∈ P.lowerSet y,
      ∃ c ∈ P.lowerSet y, a ≤ c ∧ b ≤ c := by
  intro a ha b hb
```

```
  exact ⟨P.proj.toElementMap y, P.inj_proj_apply_le y,
    (P.galois a y).mp ha, (P.galois b y).mp hb⟩

theorem proj_eq_sSup (P : ProjectionPair D E) (y : E.Element) :
    P.proj.toElementMap y = D.sSup (P.lowerSet y) (P.lowerSet_bounded y) := by
  apply le_antisymm
  · exact D.le_sSup _ (P.lowerSet_bounded y) (P.inj_proj_apply_le y)
  · exact D.sSup_le _ (P.lowerSet_bounded y) fun x hx => (P.galois x y).mp hx

theorem upperSet_nonempty (P : ProjectionPair D E) (x : D.Element) :
    (P.upperSet x).Nonempty :=
  ⟨P.inj.toElementMap x, by rw [mem_upperSet, P.proj_inj_apply x]⟩

theorem inj_eq_sInf (P : ProjectionPair D E) (x : D.Element) :
    P.inj.toElementMap x = E.sInf (P.upperSet x) (P.upperSet_nonempty x) := by
  apply le_antisymm
  · exact E.le_sInf _ (P.upperSet_nonempty x) _ fun y hy => (P.galois x y).mpr hy
  · refine E.sInf_le _ (P.upperSet_nonempty x) ?_
    rw [mem_upperSet, P.proj_inj_apply x]

end Subsystem.ProjectionPair
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair
section
set_option linter.unusedVariables false

theorem example_625.{u_1} : And
  (And
    (And
      (And
        (And
          (And
            (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
              (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
              (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
              (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E),
              Iff
                (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     α E)
                  (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α E)
                    (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α E)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α E)))
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
     D E
                    (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α
     D E P) x)
                  y)
                (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     α D)
```

```
              (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α D)))
              x
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
 E D
                (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.proj
α D E P) y)))
        (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
          (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
          {S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
α D)},
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α D S →
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α E
              (@Set.image (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E
)
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α
 α D E
                  (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj
 α D E P))
                S)))
      (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
        (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
        (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
        @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D E
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D E
 P) x)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sInf α E
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.upperSet
α D E P x)
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.
upperSet_nonempty α D E P x))))
    (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α}
      (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
      {S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
}
      (hS : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α D S),
      @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D E
          (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D E P
)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α D S hS))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α E
          (@Set.image (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
```

```
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D
E
              (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D
E P))
            S)
          (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj_bounded
α D E P S hS))))
  (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
    (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
    (a : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
    @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
α D)
        (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D))
        (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D))
        (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.lowerSet α D
E P y) a →
      ∀ (b : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
        @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
            (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
D))
            (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D))
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.lowerSet
α D E P y) b →
          ∃ (c : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D
),
            And
              (@Membership.mem (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D))
                (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D))
                (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.
lowerSet α D E P y) c)
              (And
                (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
                  (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                    (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α D)))
                  a c)
                (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
                  (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                    (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α D)))
```

```
                  b c))))
  (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
    (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E),
    @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E D
        (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.proj α D E P) y
  )
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α D
        (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.lowerSet α D E
  P y)
        (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.
  lowerSet_bounded α D E P y))))
(∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
  (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
  @Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
    (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.upperSet α D E P x)
  ) :=
@And.intro
(And
  (And
    (And
      (And
        (And
          (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
            (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
            (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
            (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E),
            Iff
              (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   α E)
                (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α E)
                  (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α E)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α E)))
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
   D E
                  (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α
   D E P) x)
                y)
              (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   α D)
                (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α D)
                  (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α D)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α D)))
                x
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
   E D
```

```
                (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.proj
α D E P) y)))
        (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
          (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
          {S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
α D)},
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α D S →
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α E
              (@Set.image (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E
)
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α
 α D E
                  (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj
 α D E P))
                S)))
      (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
        (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
        (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
        @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D E
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D E
 P) x)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sInf α E
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.upperSet
α D E P x)
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.
upperSet_nonempty α D E P x))))
    (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α}
      (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
      {S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
}
      (hS : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α D S),
      @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D E
          (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D E P
)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α D S hS))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α E
          (@Set.image (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D
 E
              (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D
 E P))
            S)
          (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj_bounded
 α D E P S hS))))
  (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
    (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
```

```
    (a : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
    @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α D)
        (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D))
        (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D))
        (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.lowerSet α D
E P y) a →
      ∀ (b : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
        @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
            (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
D))
            (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D))
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.lowerSet
α D E P y) b →
          ∃ (c : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D
),
            And
              (@Membership.mem (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D))
                (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D))
                (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.
lowerSet α D E P y) c)
              (And
                (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
                  (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                    (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α D)))
                  a c)
                (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
                  (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                    (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α D)))
                  b c))))
(∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
  (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E),
  @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E D
      (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.proj α D E P) y
)
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α D
```

```
       (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.lowerSet α D E
 P y)
       (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.
 lowerSet_bounded α D E P y))))
(∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
  (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
  @Set.Nonempty (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
    (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.upperSet α D E P x)
 )
(@And.intro
  (And
    (And
      (And
        (And
          (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
            (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
            (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
            (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E),
            Iff
              (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
  α E)
                (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α E)
                  (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α E)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α E)))
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
  D E
                  (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α
  D E P) x)
                y)
              (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
  α D)
                (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α D)
                  (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem.Element α D)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 instPartialOrderElement α D)))
                x
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
  E D
                  (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.proj
 α D E P) y)))
          (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
            (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
            {S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α D)},
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α D S →
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α E
                (@Set.image (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
 Element α D)
```

```
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E
)
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α
 α D E
                  (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj
 α D E P))
                S)))
      (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
        (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
        (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
        @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D E
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D E
 P) x)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sInf α E
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.upperSet
α D E P x)
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.
upperSet_nonempty α D E P x))))
    (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α}
      (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
      {S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
}
      (hS : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α D S),
      @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D E
          (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D E P
)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α D S hS))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α E
          (@Set.image (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D
 E
              (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D
 E P))
            S)
          (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj_bounded
 α D E P S hS))))
  (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
    (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
    (a : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
    @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α D)
      (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D))
      (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D))
      (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.lowerSet α D
E P y) a →
    ∀ (b : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
      @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
```

```
            (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
D))
            (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D))
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.lowerSet
α D E P y) b →
          ∃ (c : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D
),
            And
              (@Membership.mem (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D))
                (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D))
                (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.
lowerSet α D E P y) c)
              (And
                (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
                  (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                    (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α D)))
                  a c)
                (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
                  (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                    (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α D)))
                  b c))))
(∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
  (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E),
  @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E D
      (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.proj α D E P) y
)
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α D
      (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.lowerSet α D E
P y)
      (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.
lowerSet_bounded α D E P y)))
(@And.intro
  (And
    (And
      (And
        (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
          (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
          (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
```

```
          (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E),

          Iff
            (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α E)
              (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α E)
                (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α E)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α E)))
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
 D E
                (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α
 D E P) x)
              y)
            (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α D)
              (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α D)))
              x
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
 E D
                (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.proj
α D E P) y)))
        (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
          (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
          {S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
α D)},
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α D S →
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α E
              (@Set.image (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E
)
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α
 α D E
                  (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj
 α D E P))
                S)))
      (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
        (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
        (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
        @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D E
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D E
 P) x)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sInf α E
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.upperSet
α D E P x)
```

```
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.
upperSet_nonempty α D E P x))))
     (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α}
       (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
       {S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
}
       (hS : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α D S),
       @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D E
           (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D E P
)
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α D S hS))
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α E
           (@Set.image (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
             (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D
 E
               (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D
 E P))
             S)
           (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj_bounded
 α D E P S hS))))
   (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
     (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
     (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
     (a : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
     @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α D)
       (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D))
       (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D))
       (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.lowerSet α D
E P y) a →
     ∀ (b : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
       @Membership.mem (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
         (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
D))
         (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D))
         (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.lowerSet
α D E P y) b →
       ∃ (c : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D
),
         And
           (@Membership.mem (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
             (Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D))
             (@Set.instMembership (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D))
             (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.
lowerSet α D E P y) c)
           (And
```

```
                (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
                  (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                    (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α D)))
                  a c)
                (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
                  (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                    (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α D)))
                  b c)))
  (@And.intro
    (And
      (And
        (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
          (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
          (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
          (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E),
          Iff
            (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α E)
              (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α E)
                (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α E)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α E)))
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
 D E
                (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α
 D E P) x)
              y)
            (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α D)
              (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α D)))
              x
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
 E D
                (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.proj
α D E P) y)))
        (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
          (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
```

```
          {S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
α D)},
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α D S →
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α E
              (@Set.image (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E
)
                 (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α
 α D E
                   (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj
 α D E P))
                 S)))
      (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
         (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
         (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
         @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D E
             (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D E
 P) x)
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sInf α E
             (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.upperSet
α D E P x)
             (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.
upperSet_nonempty α D E P x))))
    (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α}
      (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
      {S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
}
      (hS : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α D S),
      @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D E
          (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D E P
)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α D S hS))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sSup α E
          (@Set.image (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D
 E
              (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D
 E P))
            S)
          (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj_bounded
 α D E P S hS)))
    (@And.intro
      (And
        (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
          (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
          (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
          (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E),
          Iff
```

```
            (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α E)
              (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α E)
                (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α E)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α E)))
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
 D E
                (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α
 D E P) x)
              y)
            (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α D)
              (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α D)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement α D)))
              x
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
 E D
                (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.proj
α D E P) y)))
        (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
          (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
          {S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
α D)},
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α D S →
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α E
              (@Set.image (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α D)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E
)
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α
 α D E
                  (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj
 α D E P))
                S)))
      (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
        (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
        (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D),
        @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α D E
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α D E
 P) x)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.sInf α E
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.upperSet
α D E P x)
            (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.
upperSet_nonempty α D E P x)))
      (@And.intro
```

```
          (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
            (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
            (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
            (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E),
            Iff
              (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     α E)
                (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α E)
                  (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α E)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α E)))
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
     D E
                  (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj α
     D E P) x)
                y)
              (@LE.le (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     α D)
                (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α D)
                  (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α D)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α D)))
                x
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α
     E D
                  (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.proj
    α D E P) y)))
          (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
            (P : @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair α D E)
            {S : Set (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
    α D)},
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α D S →
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Bounded α E
                (@Set.image (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α D)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E
    )
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α
     α D E
                    (@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj
     α D E P))
                  S))
          @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.galois
          @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj_bounded)
        @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj_eq_sInf)
      @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.inj_sSup)
    @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.lowerSet_directed)
  @DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.proj_eq_sSup)
@DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair.upperSet_nonempty
end
```

```
end DomainTheory.NeighbourhoodSystems.Subsystem.ProjectionPair
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

section
variable {α β : Type*} {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}

def NeighborhoodSystem.IsFinite {α : Type*} (D : NeighborhoodSystem α) : Prop :=
  Finite {X : Set α // D.mem X}

def projElementEmbedding {α β : Type*} {D : NeighborhoodSystem α} {E :
    NeighborhoodSystem β}
    (i : ApproximableMap D E) (j : ApproximableMap E D) (hji : j.comp i = idMap D) :
    D.Element ↪o E.Element :=
  OrderEmbedding.ofMapLEIff i.toElementMap (by
    have hround : ∀ x : D.Element, j.toElementMap (i.toElementMap x) = x := by
      intro x; rw [← toElementMap_comp, hji, toElementMap_idMap]
    intro a b
    constructor
    · intro h
      have hjm := toElementMap_mono j h
      rwa [hround a, hround b] at hjm
    · intro h
      exact toElementMap_mono i h)

theorem Trianglelefteq.elementEmbedding (h : D ? E) :
    Nonempty (D.Element ↪o E.Element) := by
  obtain ⟨D', hsub, ⟨e⟩⟩ := h
  exact ⟨e.toOrderEmbedding.trans
    (projElementEmbedding hsub.inj hsub.proj hsub.proj_comp_inj)⟩

theorem finite_element_of_isFinite {α : Type*} {D : NeighborhoodSystem α} (h : D.
    IsFinite) :
    Finite D.Element := by
  have : Finite {X : Set α // D.mem X} := h
  apply Finite.of_injective
    (β := Set {X : Set α // D.mem X}) (fun x => {p | x.mem p.1})
  intro x y hxy
  apply Element.ext
  intro X
  by_cases hX : D.mem X
  · have := Set.ext_iff.mp hxy ⟨X, hX⟩
    simpa using this
  · exact ⟨fun hmem => absurd (x.sub hmem) hX, fun hmem => absurd (y.sub hmem) hX⟩

theorem orderIso_of_embeddings {P Q : Type*} [PartialOrder P] [PartialOrder Q]
    [Finite P] [Finite Q] (f : P ↪o Q) (g : Q ↪o P) : Nonempty (P ≃o Q) := by
  classical
  obtain ⟨_⟩ := nonempty_fintype P
  obtain ⟨_⟩ := nonempty_fintype Q
  have hcard : Fintype.card P = Fintype.card Q :=
    le_antisymm (Fintype.card_le_of_injective f f.injective)
      (Fintype.card_le_of_injective g g.injective)
  have hbij : Function.Bijective f :=
    (Fintype.bijective_iff_injective_and_card f).mpr ⟨f.injective, hcard⟩
```

```
  exact ⟨{ toEquiv := Equiv.ofBijective f hbij, map_rel_iff' := f.map_rel_iff' }⟩

end
end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 6.25. For a projection pair $g : \mathcal{D} \to \mathcal{E}$ and $h : \mathcal{E} \to \mathcal{D}$ show that for $x \in |\mathcal{D}|$ and $y \in |\mathcal{E}|$ we have:

$$g(x) \sqsubseteq y \text{ iff } x \sqsubseteq h(y).$$

Thus, conclude that:

$$h(y) = \bigsqcup\{x \in |\mathcal{D}| \mid g(x) \sqsubseteq y\}, \quad \text{and}$$

$$g(x) = \bigsqcap\{y \in |\mathcal{E}| \mid x \sqsubseteq h(y)\},$$

for all $x \in |\mathcal{D}|$ and $y \in |\mathcal{E}|$. So each of the functions determines the other. In the first equation check that the set on the right is directed, and in the second equation that the set on the right is non empty. Prove also that g maps consistent sets to consistent sets and preserves $\bigsqcup$ (not just directed unions).

3.7.28 Exercise 6.26 — lifting a domain

Exercise_6_26.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_24

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_21
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_10
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise619
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB
open DomainTheory.NeighbourhoodSystems.Exercise510
section
namespace Exercise619
variable {D : NeighborhoodSystem Str}

def liftTok (D : NeighborhoodSystem Str) (_hD : ∀ X, D.mem X → X.Nonempty) :
    NeighborhoodSystem Str where
  mem W := W = liftTokMaster D ∨ ∃ X, D.mem X ∧ W = embBit false X
  master := liftTokMaster D
  master_nonempty := ⟨[], nil_mem_liftTokMaster⟩
  master_mem := Or.inl rfl
  sub_master := by
```

```
    rintro W (rfl | ⟨X, hX, rfl⟩)
    · exact subset_rfl
    · exact embF_subset_liftTokMaster hX
  inter_mem := by
    rintro W W' Z hW hW' hZ hZsub
    rcases hW with rfl | ⟨X, hX, rfl⟩
    · rcases hW' with rfl | ⟨X', hX', rfl⟩
      · rw [Set.inter_self]; exact Or.inl rfl
      · rw [liftTokMaster_inter_embF hX']; exact Or.inr ⟨X', hX', rfl⟩
    · rcases hW' with rfl | ⟨X', hX', rfl⟩
      · rw [Set.inter_comm, liftTokMaster_inter_embF hX]; exact Or.inr ⟨X, hX, rfl⟩
      · rw [embBit_inter] at hZsub ⊢
        rcases hZ with rfl | ⟨Z', hZ', rfl⟩
        · exact absurd (hZsub nil_mem_liftTokMaster) nil_not_mem_embBit
        · exact Or.inr ⟨X ∩ X', D.inter_mem hX hX' hZ' (embBit_subset.mp hZsub), rfl⟩

end Exercise619
end

section
namespace Exercise619

variable {D : NeighborhoodSystem Str}

variable {hD : ∀ X, D.mem X → X.Nonempty}

def liftBot (D : NeighborhoodSystem Str) (hD : ∀ X, D.mem X → X.Nonempty) :
    (liftTok D hD).Element where
  mem W := W = liftTokMaster D
  sub := by rintro W rfl; exact Or.inl rfl
  master_mem := rfl
  inter_mem := by rintro W W' rfl rfl; rw [Set.inter_self]
  up_mem := by
    rintro W W' rfl hW' hsub
    exact Set.Subset.antisymm ((liftTok D hD).sub_master hW') hsub

theorem liftTok_mem_embF {X : Set Str} (hX : D.mem X) :
    (liftTok D hD).mem (embBit false X) := Or.inr ⟨X, hX, rfl⟩

theorem liftTok_mem_embF_inv {W : Set Str} (h : (liftTok D hD).mem (embBit false W)) :
    D.mem W := by
  rcases h with h0 | ⟨X, hX, heq⟩
  · exact absurd (h0.symm ▸ nil_mem_liftTokMaster) nil_not_mem_embBit
  · rw [embBit_injective heq]; exact hX

end Exercise619
end

section
namespace Exercise619

variable {D : NeighborhoodSystem Str}

theorem liftTok_nonempty (hD : ∀ X, D.mem X → X.Nonempty) :
    ∀ W, (liftTok D hD).mem W → W.Nonempty := by
  rintro W (rfl | ⟨X, hX, rfl⟩)
```

```
  · exact ⟨[], nil_mem_liftTokMaster⟩
  · exact embBit_nonempty (hD X hX)

def ScottSys.lift (A : ScottSys) : ScottSys := ⟨liftTok A.sys A.ne, liftTok_nonempty A.
    ne⟩

end Exercise619
end

section
namespace Exercise619

variable {D : NeighborhoodSystem Str}

variable {hD : ∀ X, D.mem X → X.Nonempty}

def liftUp {D : NeighborhoodSystem Str} {hD : ∀ X, D.mem X → X.Nonempty} (x : D.
    Element) :
    (liftTok D hD).Element where
  mem W := W = liftTokMaster D ∨ ∃ X, x.mem X ∧ W = embBit false X
  sub := by
    rintro W (rfl | ⟨X, hX, rfl⟩)
    · exact Or.inl rfl
    · exact Or.inr ⟨X, x.sub hX, rfl⟩
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl⟩) (rfl | ⟨X', hX', rfl⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr ⟨X', hX', by rw [liftTokMaster_inter_embF (x.sub hX')]⟩
    · exact Or.inr ⟨X, hX, by rw [Set.inter_comm, liftTokMaster_inter_embF (x.sub hX)]⟩
    · exact Or.inr ⟨X ∩ X', x.inter_mem hX hX', by rw [embBit_inter]⟩
  up_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl⟩) hW' hsub
    · exact Or.inl (Set.Subset.antisymm ((liftTok D hD).sub_master hW') hsub)
    · rcases hW' with rfl | ⟨X', hX', rfl⟩
      · exact Or.inl rfl
      · exact Or.inr ⟨X', x.up_mem hX hX' (embBit_subset.mp hsub), rfl⟩

@[simp] theorem mem_liftBot {W : Set Str} : (liftBot D hD).mem W ↔ W = liftTokMaster D
     := Iff.rfl

@[simp] theorem mem_liftUp {x : D.Element} {W : Set Str} :
    (liftUp (hD := hD) x).mem W ↔ W = liftTokMaster D ∨ ∃ X, x.mem X ∧ W = embBit
    false X := Iff.rfl

end Exercise619
end

section
namespace Exercise619

variable {D : NeighborhoodSystem Str}

variable {hD : ∀ X, D.mem X → X.Nonempty}

variable {A B C : ScottSys}
```

```
def liftMapTok (f : ApproximableMap A.sys B.sys) :
    ApproximableMap (ScottSys.lift A).sys (ScottSys.lift B).sys where
  rel W W' :=
    ((liftTok A.sys A.ne).mem W ∧ W' = liftTokMaster B.sys) ∨
    (∃ X X', f.rel X X' ∧ W = embBit false X ∧ W' = embBit false X')
  rel_dom := by
    rintro W W' (⟨hW, -⟩ | ⟨X, X', hrel, rfl, -⟩)
    · exact hW
    · exact liftTok_mem_embF (hD := A.ne) (f.rel_dom hrel)
  rel_cod := by
    rintro W W' (⟨-, rfl⟩ | ⟨X, X', hrel, -, rfl⟩)
    · exact Or.inl rfl
    · exact liftTok_mem_embF (hD := B.ne) (f.rel_cod hrel)
  master_rel := Or.inl ⟨(ScottSys.lift A).sys.master_mem, rfl⟩
  inter_right := by
    rintro W W'₁ W'₂ h1 h2
    rcases h1 with ⟨hW, rfl⟩ | ⟨X, X', hrel, rfl, rfl⟩
    · rcases h2 with ⟨-, rfl⟩ | ⟨X, X', hrel, hWeq, rfl⟩
      · exact Or.inl ⟨hW, by rw [Set.inter_self]⟩
      · exact Or.inr ⟨X, X', hrel, hWeq, by rw [liftTokMaster_inter_embF (f.rel_cod
    hrel)]⟩
    · rcases h2 with ⟨-, rfl⟩ | ⟨X₂, X'₂, hrel₂, hWeq, rfl⟩
      · refine Or.inr ⟨X, X', hrel, rfl, ?_⟩
        rw [Set.inter_comm, liftTokMaster_inter_embF (f.rel_cod hrel)]
      · obtain rfl := embBit_injective hWeq
        exact Or.inr ⟨X, X' ∩ X'₂, f.inter_right hrel hrel₂, rfl, embBit_inter false X'
     X'₂⟩
  mono := by
    rintro W W'' Z Z' h hWW hZZ' hZmem hZ'mem
    rcases h with ⟨-, rfl⟩ | ⟨X, X', hrel, rfl, rfl⟩
    · exact Or.inl ⟨hZmem, Set.Subset.antisymm ((ScottSys.lift B).sys.sub_master hZ'mem
    ) hZZ'⟩
    · rcases hZ'mem with rfl | ⟨X₃, hX₃, rfl⟩
      · exact Or.inl ⟨hZmem, rfl⟩
      · rcases hZmem with rfl | ⟨X₂, hX₂, rfl⟩
        · exact absurd (hWW nil_mem_liftTokMaster) nil_not_mem_embBit
        · exact Or.inr ⟨X₂, X₃,
            f.mono hrel (embBit_subset.mp hWW) (embBit_subset.mp hZZ') hX₂ hX₃, rfl,
    rfl⟩

end Exercise619
end

section
namespace Exercise619

variable {D : NeighborhoodSystem Str}

variable {hD : ∀ X, D.mem X → X.Nonempty}

variable {A B C : ScottSys}

variable {D E : ScottSys}

theorem o_embFF_inv {W : Set Str}
```

```
    (h : (D.lift.oplus E.lift).sys.mem (embBit false (embBit false W))) : D.sys.mem W
    :=
  liftTok_mem_embF_inv (hD := D.ne)
    (oplusTok_mem_embF_inv (D₀ := D.lift.sys) (D₁ := E.lift.sys)
      (h₀ := D.lift.ne) (h₁ := E.lift.ne) h)

theorem o_embTF_inv {W : Set Str}
    (h : (D.lift.oplus E.lift).sys.mem (embBit true (embBit false W))) : E.sys.mem W
    :=
  liftTok_mem_embF_inv (hD := E.ne)
    (oplusTok_mem_embT_inv (D₀ := D.lift.sys) (D₁ := E.lift.sys)
      (h₀ := D.lift.ne) (h₁ := E.lift.ne) h)

theorem o_mem_embFF {X' : Set Str} (hX' : D.sys.mem X') :
    (D.lift.oplus E.lift).sys.mem (embBit false (embBit false X')) :=
  oplusTok_mem_embF (h₀ := D.lift.ne) (h₁ := E.lift.ne)
    (liftTok_mem_embF (hD := D.ne) hX') (embF_ne_liftTokMaster (D := D.sys))

theorem o_mem_embTF {Y' : Set Str} (hY' : E.sys.mem Y') :
    (D.lift.oplus E.lift).sys.mem (embBit true (embBit false Y')) :=
  oplusTok_mem_embT (h₀ := D.lift.ne) (h₁ := E.lift.ne)
    (liftTok_mem_embF (hD := E.ne) hY') (embF_ne_liftTokMaster (D := E.sys))

def toSumLift (z : (D.lift.oplus E.lift).sys.Element) : (D.sum E).sys.Element where
  mem W := W = sumTokMaster D.sys E.sys
    ∨ (∃ X, D.sys.mem X ∧ W = embBit false X ∧ z.mem (embBit false (embBit false X)))
    ∨ (∃ Y, E.sys.mem Y ∧ W = embBit true Y ∧ z.mem (embBit true (embBit false Y)))
  sub := by
    rintro W (rfl | ⟨X, hX, rfl, -⟩ | ⟨Y, hY, rfl, -⟩)
    · exact Or.inl rfl
    · exact sumTok_mem_embF (h₀ := D.ne) (h₁ := E.ne) hX
    · exact sumTok_mem_embT (h₀ := D.ne) (h₁ := E.ne) hY
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hzX⟩ | ⟨Y, hY, rfl, hzY⟩)
      (rfl | ⟨X', hX', rfl, hzX'⟩ | ⟨Y', hY', rfl, hzY'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr (Or.inl ⟨X', hX', by rw [sumTokMaster_inter_embF hX'], hzX'⟩)
    · exact Or.inr (Or.inr ⟨Y', hY', by rw [sumTokMaster_inter_embT hY'], hzY'⟩)
    · exact Or.inr (Or.inl ⟨X, hX, by rw [Set.inter_comm, sumTokMaster_inter_embF hX],
    hzX⟩)
    · refine Or.inr (Or.inl ⟨X ∩ X', ?_, by rw [embBit_inter], ?_⟩)
      · have hz := z.inter_mem hzX hzX'; rw [embBit_inter, embBit_inter] at hz
        exact o_embFF_inv (z.sub hz)
      · have hz := z.inter_mem hzX hzX'; rwa [embBit_inter, embBit_inter] at hz
    · exfalso
      have hz := z.inter_mem hzX hzY'
      rw [embBit_inter_ne (show (false : Bool) = true by decide)] at hz
      obtain ⟨t, ht⟩ := (D.lift.oplus E.lift).ne _ (z.sub hz); exact Set.notMem_empty t
     ht
    · exact Or.inr (Or.inr ⟨Y, hY, by rw [Set.inter_comm, sumTokMaster_inter_embT hY],
    hzY⟩)
    · exfalso
      have hz := z.inter_mem hzY hzX'
      rw [embBit_inter_ne (show (true : Bool) = false by decide)] at hz
```

```
      obtain ⟨t, ht⟩ := (D.lift.oplus E.lift).ne _ (z.sub hz); exact Set.notMem_empty t
     ht
    · refine Or.inr (Or.inr ⟨Y ∩ Y', ?_, by rw [embBit_inter], ?_⟩)
      · have hz := z.inter_mem hzY hzY'; rw [embBit_inter, embBit_inter] at hz
        exact o_embTF_inv (z.sub hz)
      · have hz := z.inter_mem hzY hzY'; rwa [embBit_inter, embBit_inter] at hz
  up_mem := by
    rintro W W' (rfl | ⟨X, hX, rfl, hzX⟩ | ⟨Y, hY, rfl, hzY⟩) hW' hsub
    · exact Or.inl (Set.Subset.antisymm ((D.sum E).sys.sub_master hW') hsub)
    · rcases hW' with rfl | ⟨X'', hX'', rfl⟩ | ⟨Y'', hY'', rfl⟩
      · exact Or.inl rfl
      · refine Or.inr (Or.inl ⟨X'', hX'', rfl, ?_⟩)
        exact z.up_mem hzX (o_mem_embFF hX'')
          (embBit_subset.mpr (embBit_subset.mpr (embBit_subset.mp hsub)))
      · exact absurd hsub
          (fun hs => embBit_not_subset_cross (show (false : Bool) = true by decide) (D
    .ne X hX) hs)
    · rcases hW' with rfl | ⟨X'', hX'', rfl⟩ | ⟨Y'', hY'', rfl⟩
      · exact Or.inl rfl
      · exact absurd hsub
          (fun hs => embBit_not_subset_cross (show (true : Bool) = false by decide) (E
    .ne Y hY) hs)
      · refine Or.inr (Or.inr ⟨Y'', hY'', rfl, ?_⟩)
        exact z.up_mem hzY (o_mem_embTF hY'')
          (embBit_subset.mpr (embBit_subset.mpr (embBit_subset.mp hsub)))

@[simp] theorem toSumLift_mem_embF {z : (D.lift.oplus E.lift).sys.Element} {X : Set
    Str}
    (hX : D.sys.mem X) :
    (toSumLift z).mem (embBit false X) ↔ z.mem (embBit false (embBit false X)) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hz⟩ | ⟨Y', hY', heq, hz⟩)
    · exact absurd h0 embF_ne_sumTokMaster
    · rwa [embBit_injective heq]
    · exact absurd heq (embBit_ne (show (false : Bool) = true by decide) (D.ne X hX))
  · intro hz; exact Or.inr (Or.inl ⟨X, hX, rfl, hz⟩)

@[simp] theorem toSumLift_mem_embT {z : (D.lift.oplus E.lift).sys.Element} {Y : Set
    Str}
    (hY : E.sys.mem Y) :
    (toSumLift z).mem (embBit true Y) ↔ z.mem (embBit true (embBit false Y)) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hz⟩ | ⟨Y', hY', heq, hz⟩)
    · exact absurd h0 embT_ne_sumTokMaster
    · exact absurd heq (embBit_ne (show (true : Bool) = false by decide) (E.ne Y hY))
    · rwa [embBit_injective heq]
  · intro hz; exact Or.inr (Or.inr ⟨Y, hY, rfl, hz⟩)

def fromSumLift (s : (D.sum E).sys.Element) : (D.lift.oplus E.lift).sys.Element where
  mem W := W = sumTokMaster D.lift.sys E.lift.sys
    ∨ (∃ X, D.sys.mem X ∧ W = embBit false (embBit false X) ∧ s.mem (embBit false X))
    ∨ (∃ Y, E.sys.mem Y ∧ W = embBit true (embBit false Y) ∧ s.mem (embBit true Y))
  sub := by
    rintro W (rfl | ⟨X, hX, rfl, -⟩ | ⟨Y, hY, rfl, -⟩)
    · exact Or.inl rfl
    · exact o_mem_embFF hX
```

```
  · exact o_mem_embTF hY
master_mem := Or.inl rfl
inter_mem := by
  rintro W W' (rfl | ⟨X, hX, rfl, hsX⟩ | ⟨Y, hY, rfl, hsY⟩)
    (rfl | ⟨X', hX', rfl, hsX'⟩ | ⟨Y', hY', rfl, hsY'⟩)
  · exact Or.inl (by rw [Set.inter_self])
  · refine Or.inr (Or.inl ⟨X', hX', ?_, hsX'⟩)
    rw [sumTokMaster_inter_embF (D₀ := D.lift.sys) (D₁ := E.lift.sys)
      (liftTok_mem_embF (hD := D.ne) hX')]
  · refine Or.inr (Or.inr ⟨Y', hY', ?_, hsY'⟩)
    rw [sumTokMaster_inter_embT (D₀ := D.lift.sys) (D₁ := E.lift.sys)
      (liftTok_mem_embF (hD := E.ne) hY')]
  · refine Or.inr (Or.inl ⟨X, hX, ?_, hsX⟩)
    rw [Set.inter_comm, sumTokMaster_inter_embF (D₀ := D.lift.sys) (D₁ := E.lift.sys)
      (liftTok_mem_embF (hD := D.ne) hX)]
  · refine Or.inr (Or.inl ⟨X ∩ X', ?_, by rw [embBit_inter, embBit_inter], ?_⟩)
    · have hs := s.inter_mem hsX hsX'; rw [embBit_inter] at hs
      exact sumTok_mem_embF_inv (h₀ := D.ne) (h₁ := E.ne) (s.sub hs)
    · have hs := s.inter_mem hsX hsX'; rwa [embBit_inter] at hs
  · exfalso
    have hs := s.inter_mem hsX hsY'
    rw [embBit_inter_ne (show (false : Bool) = true by decide)] at hs
    obtain ⟨t, ht⟩ := sumTok_mem_nonempty (h₀ := D.ne) (h₁ := E.ne) (s.sub hs)
    exact Set.notMem_empty t ht
  · refine Or.inr (Or.inr ⟨Y, hY, ?_, hsY⟩)
    rw [Set.inter_comm, sumTokMaster_inter_embT (D₀ := D.lift.sys) (D₁ := E.lift.sys)
      (liftTok_mem_embF (hD := E.ne) hY)]
  · exfalso
    have hs := s.inter_mem hsY hsX'
    rw [embBit_inter_ne (show (true : Bool) = false by decide)] at hs
    obtain ⟨t, ht⟩ := sumTok_mem_nonempty (h₀ := D.ne) (h₁ := E.ne) (s.sub hs)
    exact Set.notMem_empty t ht
  · refine Or.inr (Or.inr ⟨Y ∩ Y', ?_, by rw [embBit_inter, embBit_inter], ?_⟩)
    · have hs := s.inter_mem hsY hsY'; rw [embBit_inter] at hs
      exact sumTok_mem_embT_inv (h₀ := D.ne) (h₁ := E.ne) (s.sub hs)
    · have hs := s.inter_mem hsY hsY'; rwa [embBit_inter] at hs
up_mem := by
  rintro W W' (rfl | ⟨X, hX, rfl, hsX⟩ | ⟨Y, hY, rfl, hsY⟩) hW' hsub
  · exact Or.inl (Set.Subset.antisymm ((D.lift.oplus E.lift).sys.sub_master hW') hsub
  )
  · rcases hW' with rfl | ⟨V, hV, hVne, rfl⟩ | ⟨V, hV, hVne, rfl⟩
    · exact Or.inl rfl
    · rcases hV with rfl | ⟨X'', hX''D, rfl⟩
      · exact absurd rfl hVne
      · refine Or.inr (Or.inl ⟨X'', hX''D, rfl, ?_⟩)
        exact s.up_mem hsX (sumTok_mem_embF (h₀ := D.ne) (h₁ := E.ne) hX''D)
          (embBit_subset.mpr (embBit_subset.mp (embBit_subset.mp hsub)))
    · exact absurd hsub
        (fun hs => embBit_not_subset_cross (show (false : Bool) = true by decide)
          (embBit_nonempty (D.ne X hX)) hs)
  · rcases hW' with rfl | ⟨V, hV, hVne, rfl⟩ | ⟨V, hV, hVne, rfl⟩
    · exact Or.inl rfl
    · exact absurd hsub
        (fun hs => embBit_not_subset_cross (show (true : Bool) = false by decide)
          (embBit_nonempty (E.ne Y hY)) hs)
    · rcases hV with rfl | ⟨Y'', hY''E, rfl⟩
```

```
        · exact absurd rfl hVne
        · refine Or.inr (Or.inr ⟨Y'', hY''E, rfl, ?_⟩)
          exact s.up_mem hsY (sumTok_mem_embT (h₀ := D.ne) (h₁ := E.ne) hY''E)
            (embBit_subset.mpr (embBit_subset.mp (embBit_subset.mp hsub)))

@[simp] theorem fromSumLift_mem_embFF {s : (D.sum E).sys.Element} {X : Set Str} (hX :
    D.sys.mem X) :
    (fromSumLift s).mem (embBit false (embBit false X)) ↔ s.mem (embBit false X) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hs⟩ | ⟨Y', hY', heq, hs⟩)
    · exact absurd h0 embF_ne_sumTokMaster
    · rwa [embBit_injective (embBit_injective heq)]
    · exact absurd heq (embBit_ne (show (false : Bool) = true by decide)
        (embBit_nonempty (D.ne X hX)))
  · intro hs; exact Or.inr (Or.inl ⟨X, hX, rfl, hs⟩)

@[simp] theorem fromSumLift_mem_embTF {s : (D.sum E).sys.Element} {Y : Set Str} (hY :
    E.sys.mem Y) :
    (fromSumLift s).mem (embBit true (embBit false Y)) ↔ s.mem (embBit true Y) := by
  constructor
  · rintro (h0 | ⟨X', hX', heq, hs⟩ | ⟨Y', hY', heq, hs⟩)
    · exact absurd h0 embT_ne_sumTokMaster
    · exact absurd heq (embBit_ne (show (true : Bool) = false by decide)
        (embBit_nonempty (E.ne Y hY)))
    · rwa [embBit_injective (embBit_injective heq)]
  · intro hs; exact Or.inr (Or.inr ⟨Y, hY, rfl, hs⟩)

theorem fromSumLift_toSumLift (z : (D.lift.oplus E.lift).sys.Element) :
    fromSumLift (toSumLift z) = z := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨X, hX, rfl, hs⟩ | ⟨Y, hY, rfl, hs⟩)
    · exact z.master_mem
    · exact (toSumLift_mem_embF hX).mp hs
    · exact (toSumLift_mem_embT hY).mp hs
  · intro hW
    rcases z.sub hW with rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩
    · exact Or.inl rfl
    · rcases hX with rfl | ⟨X', hX'D, rfl⟩
      · exact absurd rfl hXne
      · exact Or.inr (Or.inl ⟨X', hX'D, rfl, (toSumLift_mem_embF hX'D).mpr hW⟩)
    · rcases hY with rfl | ⟨Y', hY'E, rfl⟩
      · exact absurd rfl hYne
      · exact Or.inr (Or.inr ⟨Y', hY'E, rfl, (toSumLift_mem_embT hY'E).mpr hW⟩)

theorem lp_mem_embF {X' Y' : Set Str} (hX' : D.sys.mem X') (hY' : E.sys.mem Y') :
    (D.prod E).lift.sys.mem (embBit false (prodTokNbhd X' Y')) :=
  liftTok_mem_embF (hD := (D.prod E).ne) (prodTok_mem_prodTokNbhd hX' hY')

theorem lp_prod_inv {X' Y' : Set Str}
    (h : (D.prod E).lift.sys.mem (embBit false (prodTokNbhd X' Y'))) :
    D.sys.mem X' ∧ E.sys.mem Y' := by
  obtain ⟨A, B, hA, hB, heq⟩ := liftTok_mem_embF_inv (hD := (D.prod E).ne) h
  obtain ⟨rfl, rfl⟩ := prodTokNbhd_injective heq
  exact ⟨hA, hB⟩
```

```
theorem ot_mem_prod {X' Y' : Set Str} (hX' : D.sys.mem X') (hY' : E.sys.mem Y') :
    (D.lift.otimes E.lift).sys.mem (prodTokNbhd (embBit false X') (embBit false Y'))
    :=
  otimesTok_mem_prod (liftTok_mem_embF (hD := D.ne) hX') (liftTok_mem_embF (hD := E.ne
    ) hY')
    (embF_ne_liftTokMaster (D := D.sys)) (embF_ne_liftTokMaster (D := E.sys))


theorem ot_mem_prod_inv {X' Y' : Set Str}
    (h : (D.lift.otimes E.lift).sys.mem (prodTokNbhd (embBit false X') (embBit false Y
    ''))) :
    D.sys.mem X' ∧ E.sys.mem Y' := by
  obtain ⟨h1, h2⟩ := otimesTok_mem_prod_inv (D₀ := D.lift.sys) (D₁ := E.lift.sys) h
    (embF_ne_liftTokMaster (D := D.sys))
  exact ⟨liftTok_mem_embF_inv (hD := D.ne) h1, liftTok_mem_embF_inv (hD := E.ne) h2⟩

def toLiftProd (z : (D.lift.otimes E.lift).sys.Element) : (D.prod E).lift.sys.Element
    where
  mem W := W = liftTokMaster (prodTok D.sys E.sys)
    ∨ (∃ X Y, D.sys.mem X ∧ E.sys.mem Y ∧ W = embBit false (prodTokNbhd X Y) ∧
        z.mem (prodTokNbhd (embBit false X) (embBit false Y)))
  sub := by
    rintro W (rfl | ⟨X, Y, hX, hY, rfl, -⟩)
    · exact Or.inl rfl
    · exact lp_mem_embF hX hY
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨X, Y, hX, hY, rfl, hzXY⟩) (rfl | ⟨X', Y', hX', hY', rfl, hzXY'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · refine Or.inr ⟨X', Y', hX', hY', ?_, hzXY'⟩
      rw [liftTokMaster_inter_embF (prodTok_mem_prodTokNbhd hX' hY')]
    · refine Or.inr ⟨X, Y, hX, hY, ?_, hzXY⟩
      rw [Set.inter_comm, liftTokMaster_inter_embF (prodTok_mem_prodTokNbhd hX hY)]
    · have hz := z.inter_mem hzXY hzXY'
      rw [prodTokNbhd_inter, embBit_inter, embBit_inter] at hz
      obtain ⟨hXi, hYi⟩ := ot_mem_prod_inv (z.sub hz)
      refine Or.inr ⟨X ∩ X', Y ∩ Y', hXi, hYi, ?_, hz⟩
      rw [embBit_inter, prodTokNbhd_inter]
  up_mem := by
    rintro W W' (rfl | ⟨X, Y, hX, hY, rfl, hzXY⟩) hW' hsub
    · exact Or.inl (Set.Subset.antisymm ((D.prod E).lift.sys.sub_master hW') hsub)
    · rcases hW' with rfl | ⟨Z, hZ, rfl⟩
      · exact Or.inl rfl
      · obtain ⟨X'', Y'', hX'', hY'', rfl⟩ := hZ
        refine Or.inr ⟨X'', Y'', hX'', hY'', rfl, ?_⟩
        obtain ⟨hsX, hsY⟩ := prodTokNbhd_subset_iff.mp (embBit_subset.mp hsub)
        exact z.up_mem hzXY (ot_mem_prod hX'' hY'')
          (prodTokNbhd_subset_iff.mpr ⟨embBit_subset.mpr hsX, embBit_subset.mpr hsY⟩)

@[simp] theorem toLiftProd_mem_embF {z : (D.lift.otimes E.lift).sys.Element} {X Y :
    Set Str}
    (hX : D.sys.mem X) (hY : E.sys.mem Y) :
    (toLiftProd z).mem (embBit false (prodTokNbhd X Y)) ↔
      z.mem (prodTokNbhd (embBit false X) (embBit false Y)) := by
  constructor
```

```
  · rintro (h0 | ⟨X', Y', hX', hY', heq, hz⟩)
    · exact absurd h0 (embF_ne_liftTokMaster (D := prodTok D.sys E.sys))
    · obtain ⟨rfl, rfl⟩ := prodTokNbhd_injective (embBit_injective heq); exact hz
  · intro hz; exact Or.inr ⟨X, Y, hX, hY, rfl, hz⟩

def fromLiftProd (s : (D.prod E).lift.sys.Element) : (D.lift.otimes E.lift).sys.
    Element where
  mem W := W = prodTokNbhd (liftTokMaster D.sys) (liftTokMaster E.sys)
    ∨ (∃ X Y, D.sys.mem X ∧ E.sys.mem Y ∧ W = prodTokNbhd (embBit false X) (embBit
    false Y) ∧
        s.mem (embBit false (prodTokNbhd X Y)))
  sub := by
    rintro W (rfl | ⟨X, Y, hX, hY, rfl, -⟩)
    · exact Or.inl rfl
    · exact ot_mem_prod hX hY
  master_mem := Or.inl rfl
  inter_mem := by
    rintro W W' (rfl | ⟨X, Y, hX, hY, rfl, hsXY⟩) (rfl | ⟨X', Y', hX', hY', rfl, hsXY'⟩)
    · exact Or.inl (by rw [Set.inter_self])
    · refine Or.inr ⟨X', Y', hX', hY', ?_, hsXY'⟩
      rw [prodTokNbhd_inter, liftTokMaster_inter_embF hX', liftTokMaster_inter_embF hY
    ']
    · refine Or.inr ⟨X, Y, hX, hY, ?_, hsXY⟩
      rw [Set.inter_comm, prodTokNbhd_inter, liftTokMaster_inter_embF hX,
        liftTokMaster_inter_embF hY]
    · have hs := s.inter_mem hsXY hsXY'
      rw [embBit_inter, prodTokNbhd_inter] at hs
      obtain ⟨hXi, hYi⟩ := lp_prod_inv (s.sub hs)
      refine Or.inr ⟨X ∩ X', Y ∩ Y', hXi, hYi, ?_, hs⟩
      rw [prodTokNbhd_inter, embBit_inter, embBit_inter]
  up_mem := by
    rintro W W' (rfl | ⟨X, Y, hX, hY, rfl, hsXY⟩) hW' hsub
    · exact Or.inl (Set.Subset.antisymm ((D.lift.otimes E.lift).sys.sub_master hW')
    hsub)
    · rcases hW' with rfl | ⟨U, V, hU, hV, hUne, hVne, rfl⟩
      · exact Or.inl rfl
      · rcases hU with rfl | ⟨X'', hX''D, rfl⟩
        · exact absurd rfl hUne
        · rcases hV with rfl | ⟨Y'', hY''E, rfl⟩
          · exact absurd rfl hVne
          · refine Or.inr ⟨X'', Y'', hX''D, hY''E, rfl, ?_⟩
            obtain ⟨hsX, hsY⟩ := prodTokNbhd_subset_iff.mp hsub
            exact s.up_mem hsXY (lp_mem_embF hX''D hY''E)
              (embBit_subset.mpr (prodTokNbhd_subset_iff.mpr
                ⟨embBit_subset.mp hsX, embBit_subset.mp hsY⟩))

@[simp] theorem fromLiftProd_mem_prod {s : (D.prod E).lift.sys.Element} {X Y : Set Str
    }
    (hX : D.sys.mem X) (hY : E.sys.mem Y) :
    (fromLiftProd s).mem (prodTokNbhd (embBit false X) (embBit false Y)) ↔
      s.mem (embBit false (prodTokNbhd X Y)) := by
  constructor
  · rintro (h0 | ⟨X', Y', hX', hY', heq, hs⟩)
    · obtain ⟨hX0, -⟩ := prodTokNbhd_injective h0
      exact absurd hX0 (embF_ne_liftTokMaster (D := D.sys))
    · obtain ⟨hXe, hYe⟩ := prodTokNbhd_injective heq
```

```
      rw [embBit_injective hXe, embBit_injective hYe]; exact hs
  · intro hs; exact Or.inr ⟨X, Y, hX, hY, rfl, hs⟩

theorem fromLiftProd_toLiftProd (z : (D.lift.otimes E.lift).sys.Element) :
    fromLiftProd (toLiftProd z) = z := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨X, Y, hX, hY, rfl, hs⟩)
    · exact z.master_mem
    · exact (toLiftProd_mem_embF hX hY).mp hs
  · intro hW
    rcases z.sub hW with rfl | ⟨X, Y, hX, hY, hXne, hYne, rfl⟩
    · exact Or.inl rfl
    · rcases hX with rfl | ⟨X'', hX''D, rfl⟩
      · exact absurd rfl hXne
      · rcases hY with rfl | ⟨Y'', hY''E, rfl⟩
        · exact absurd rfl hYne
        · exact Or.inr ⟨X'', Y'', hX''D, hY''E, rfl, (toLiftProd_mem_embF hX''D hY''E).
    mpr hW⟩

theorem toLiftProd_fromLiftProd (s : (D.prod E).lift.sys.Element) :
    toLiftProd (fromLiftProd s) = s := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨X, Y, hX, hY, rfl, hs⟩)
    · exact s.master_mem
    · exact (fromLiftProd_mem_prod hX hY).mp hs
  · intro hW
    rcases s.sub hW with rfl | ⟨Z, hZ, rfl⟩
    · exact Or.inl rfl
    · obtain ⟨X, Y, hX, hY, rfl⟩ := hZ
      exact Or.inr ⟨X, Y, hX, hY, rfl, (fromLiftProd_mem_prod hX hY).mpr hW⟩

def liftProdEquiv : (D.lift.otimes E.lift).sys.Element ≃o (D.prod E).lift.sys.Element
    where
  toFun := toLiftProd
  invFun := fromLiftProd
  left_inv := fromLiftProd_toLiftProd
  right_inv := toLiftProd_fromLiftProd
  map_rel_iff' := by
    intro z z'
    constructor
    · intro h W hW
      rcases z.sub hW with rfl | ⟨X, Y, hX, hY, hXne, hYne, rfl⟩
      · exact z'.master_mem
      · rcases hX with rfl | ⟨X'', hX''D, rfl⟩
        · exact absurd rfl hXne
        · rcases hY with rfl | ⟨Y'', hY''E, rfl⟩
          · exact absurd rfl hYne
          · exact (toLiftProd_mem_embF hX''D hY''E).mp
              (h _ ((toLiftProd_mem_embF hX''D hY''E).mpr hW))
    · intro h W hW
      rcases hW with rfl | ⟨X, Y, hX, hY, rfl, hzXY⟩
      · exact Or.inl rfl
```

```
      · exact Or.inr ⟨X, Y, hX, hY, rfl, h _ hzXY⟩

theorem toSumLift_fromSumLift (s : (D.sum E).sys.Element) :
    toSumLift (fromSumLift s) = s := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨X, hX, rfl, hs⟩ | ⟨Y, hY, rfl, hs⟩)
    · exact s.master_mem
    · exact (fromSumLift_mem_embFF hX).mp hs
    · exact (fromSumLift_mem_embTF hY).mp hs
  · intro hW
    rcases s.sub hW with rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩
    · exact Or.inl rfl
    · exact Or.inr (Or.inl ⟨X, hX, rfl, (fromSumLift_mem_embFF hX).mpr hW⟩)
    · exact Or.inr (Or.inr ⟨Y, hY, rfl, (fromSumLift_mem_embTF hY).mpr hW⟩)

def sumLiftEquiv : (D.lift.oplus E.lift).sys.Element ≃o (D.sum E).sys.Element where
  toFun := toSumLift
  invFun := fromSumLift
  left_inv := fromSumLift_toSumLift
  right_inv := toSumLift_fromSumLift
  map_rel_iff' := by
    intro z z'
    constructor
    · intro h W hW
      rcases z.sub hW with rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩
      · exact z'.master_mem
      · rcases hX with rfl | ⟨X', hX'D, rfl⟩
        · exact absurd rfl hXne
        · exact (toSumLift_mem_embF hX'D).mp (h _ ((toSumLift_mem_embF hX'D).mpr hW))
      · rcases hY with rfl | ⟨Y', hY'E, rfl⟩
        · exact absurd rfl hYne
        · exact (toSumLift_mem_embT hY'E).mp (h _ ((toSumLift_mem_embT hY'E).mpr hW))
    · intro h W hW
      rcases hW with rfl | ⟨X, hX, rfl, hzX⟩ | ⟨Y, hY, rfl, hzY⟩
      · exact Or.inl rfl
      · exact Or.inr (Or.inl ⟨X, hX, rfl, h _ hzX⟩)
      · exact Or.inr (Or.inr ⟨Y, hY, rfl, h _ hzY⟩)

end Exercise619
end

section
namespace Exercise619

variable {D : NeighborhoodSystem Str}

variable {hD : ∀ X, D.mem X → X.Nonempty}

def unlift (z : (liftTok D hD).Element) (hz : z.mem (embBit false D.master)) : D.
    Element where
  mem X := z.mem (embBit false X)
  sub := fun hX => liftTok_mem_embF_inv (z.sub hX)
  master_mem := hz
  inter_mem := by
```

```
    intro X X' hX hX'
    have hz' := z.inter_mem hX hX'
    rwa [embBit_inter] at hz'
  up_mem := by
    intro X Y hX hY hXY
    exact z.up_mem hX (liftTok_mem_embF hY) (embBit_subset.mpr hXY)

theorem liftBot_le (z : (liftTok D hD).Element) : liftBot D hD ≤ z := by
  rintro W rfl; exact z.master_mem

theorem liftBot_lt_liftUp (x : D.Element) : liftBot D hD < liftUp (hD := hD) x := by
  refine lt_of_le_of_ne (liftBot_le _) (fun heq => ?_)
  have hmem : (liftBot D hD).mem (embBit false D.master) := by
    rw [heq]; exact Or.inr ⟨D.master, x.master_mem, rfl⟩
  exact embF_ne_liftTokMaster hmem

end Exercise619
end

section
namespace Exercise619

variable {D : NeighborhoodSystem Str}

variable {hD : ∀ X, D.mem X → X.Nonempty}

variable {A B C : ScottSys}

theorem liftMapTok_comp (f : ApproximableMap A.sys B.sys) (g : ApproximableMap B.sys C
    .sys) :
    liftMapTok (g.comp f) = (liftMapTok g).comp (liftMapTok f) := by
  apply ApproximableMap.ext
  intro W W''
  constructor
  · rintro (⟨hW, rfl⟩ | ⟨X, X'', ⟨X', hf, hg⟩, rfl, rfl⟩)
    · exact ⟨liftTokMaster B.sys, Or.inl ⟨hW, rfl⟩,
        Or.inl ⟨(ScottSys.lift B).sys.master_mem, rfl⟩⟩
    · exact ⟨embBit false X', Or.inr ⟨X, X', hf, rfl, rfl⟩, Or.inr ⟨X', X'', hg, rfl,
      rfl⟩⟩
  · rintro ⟨W', hWW', hW'W''⟩
    rcases hWW' with ⟨hW, rfl⟩ | ⟨X, X', hf, rfl, rfl⟩
    · rcases hW'W'' with ⟨-, rfl⟩ | ⟨X, X', -, heq, -⟩
      · exact Or.inl ⟨hW, rfl⟩
      · exact absurd (heq ▸ nil_mem_liftTokMaster) nil_not_mem_embBit
    · rcases hW'W'' with ⟨-, rfl⟩ | ⟨X₂, X'', hg, heq, rfl⟩
      · exact Or.inl ⟨liftTok_mem_embF (hD := A.ne) (f.rel_dom hf), rfl⟩
      · obtain rfl := embBit_injective heq
        exact Or.inr ⟨X, X'', ⟨X', hf, hg⟩, rfl, rfl⟩

theorem liftMapTok_id : liftMapTok (idMap A.sys) = idMap (ScottSys.lift A).sys := by
  apply ApproximableMap.ext
  intro W W'
  constructor
  · rintro (⟨hW, rfl⟩ | ⟨X, X', ⟨hX, hX', hsub⟩, rfl, rfl⟩)
    · exact ⟨hW, (ScottSys.lift A).sys.master_mem, (ScottSys.lift A).sys.sub_master hW⟩
    · exact ⟨liftTok_mem_embF (hD := A.ne) hX, liftTok_mem_embF (hD := A.ne) hX',
```

```
        embBit_subset.mpr hsub⟩
  · rintro ⟨hW, hW', hsub⟩
    rcases hW' with rfl | ⟨X', hX', rfl⟩
    · exact Or.inl ⟨hW, rfl⟩
    · rcases hW with rfl | ⟨X, hX, rfl⟩
      · exact absurd (hsub nil_mem_liftTokMaster) nil_not_mem_embBit
      · exact Or.inr ⟨X, X', ⟨hX, hX', embBit_subset.mp hsub⟩, rfl, rfl⟩

theorem liftMapTok_isStrict (f : ApproximableMap A.sys B.sys) : IsStrict (liftMapTok f
    ) := by
  rintro Y (⟨-, rfl⟩ | ⟨X, X', -, heq, -⟩)
  · rfl
  · have hnil : ([] : Str) ∈ embBit false X := by
      rw [← heq]; exact nil_mem_liftTokMaster
    exact absurd hnil nil_not_mem_embBit

end Exercise619
end

section
namespace Exercise619

variable {D : NeighborhoodSystem Str}

variable {hD : ∀ X, D.mem X → X.Nonempty}

theorem liftTok_mem_master : (liftTok D hD).mem (liftTokMaster D) := Or.inl rfl

theorem liftUp_le_liftUp_iff {x y : D.Element} :
    liftUp (hD := hD) x ≤ liftUp (hD := hD) y ↔ x ≤ y := by
  constructor
  · intro h X hX
    have hmem := h (embBit false X) (Or.inr ⟨X, hX, rfl⟩)
    rcases hmem with h0 | ⟨X', hX', heq⟩
    · exact absurd (h0.symm ▸ nil_mem_liftTokMaster) nil_not_mem_embBit
    · rw [embBit_injective heq]; exact hX'
  · rintro h W (rfl | ⟨X, hX, rfl⟩)
    · exact Or.inl rfl
    · exact Or.inr ⟨X, h X hX, rfl⟩

theorem liftUp_unlift (z : (liftTok D hD).Element) (hz : z.mem (embBit false D.master)
    ) :
    liftUp (hD := hD) (unlift z hz) = z := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (rfl | ⟨X, hX, rfl⟩)
    · exact z.master_mem
    · exact hX
  · intro hW
    rcases z.sub hW with rfl | ⟨X, hX, rfl⟩
    · exact Or.inl rfl
    · exact Or.inr ⟨X, hW, rfl⟩

theorem eq_liftBot_or_exists_liftUp (z : (liftTok D hD).Element) :
    z = liftBot D hD ∨ ∃ x : D.Element, z = liftUp (hD := hD) x := by
```

```
  by_cases hz : z.mem (embBit false D.master)
  · exact Or.inr ⟨unlift z hz, (liftUp_unlift z hz).symm⟩
  · refine Or.inl ?_
    apply NeighborhoodSystem.Element.ext
    intro W
    constructor
    · intro hW
      rcases z.sub hW with rfl | ⟨X, hX, rfl⟩
      · rfl
      · exact absurd
          (z.up_mem hW (liftTok_mem_embF D.master_mem) (embBit_subset.mpr (D.
    sub_master hX))) hz
    · rintro rfl; exact z.master_mem

end Exercise619
end

section
namespace Exercise619

variable {D : NeighborhoodSystem Str}

variable {hD : ∀ X, D.mem X → X.Nonempty}

variable {A B C : ScottSys}

variable {D E : ScottSys}

theorem lift_oplus_lift_iso_sum :
    (D.lift.oplus E.lift).sys ≅? (D.sum E).sys := ⟨sumLiftEquiv⟩

theorem lift_otimes_lift_iso_lift_prod :
    (D.lift.otimes E.lift).sys ≅? (D.prod E).lift.sys := ⟨liftProdEquiv⟩

end Exercise619
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise619
section
set_option linter.unusedVariables false

theorem example_626 : And
  (And
    (∀ {D : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
    NeighbourhoodSystems.ExampleB.Str}
      {hD :
        ∀ (X : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory.
    NeighbourhoodSystems.ExampleB.Str D X →
            @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str X}
      (z :
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
          (DomainTheory.NeighbourhoodSystems.Exercise619.liftTok D hD)),
      Or
```

```
     (@Eq
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
         (DomainTheory.NeighbourhoodSystems.Exercise619.liftTok D hD))
       z (DomainTheory.NeighbourhoodSystems.Exercise619.liftBot D hD))
     (∃ (x :
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
         D),
       @Eq
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
           DomainTheory.NeighbourhoodSystems.ExampleB.Str
           (DomainTheory.NeighbourhoodSystems.Exercise619.liftTok D hD))
         z (@DomainTheory.NeighbourhoodSystems.Exercise619.liftUp D hD x)))
  (∀ {D E : DomainTheory.NeighbourhoodSystems.Exercise619.ScottSys},
    @DomainTheory.NeighbourhoodSystems.Isomorphic DomainTheory.NeighbourhoodSystems.
  ExampleB.Str
      DomainTheory.NeighbourhoodSystems.ExampleB.Str (D.lift.oplus E.lift).sys (D.
  sum E).sys))
(∀ {D E : DomainTheory.NeighbourhoodSystems.Exercise619.ScottSys},
  @DomainTheory.NeighbourhoodSystems.Isomorphic DomainTheory.NeighbourhoodSystems.
  ExampleB.Str
    DomainTheory.NeighbourhoodSystems.ExampleB.Str (D.lift.otimes E.lift).sys (D.
  prod E).lift.sys) :=
@And.intro
(And
  (∀ {D : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str}
    {hD :
      ∀ (X : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str D X →
          @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str X}
    (z :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
        (DomainTheory.NeighbourhoodSystems.Exercise619.liftTok D hD)),
    Or
      (@Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
          (DomainTheory.NeighbourhoodSystems.Exercise619.liftTok D hD))
        z (DomainTheory.NeighbourhoodSystems.Exercise619.liftBot D hD))
      (∃ (x :
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.ExampleB.Str


          D),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
            DomainTheory.NeighbourhoodSystems.ExampleB.Str
            (DomainTheory.NeighbourhoodSystems.Exercise619.liftTok D hD))
          z (@DomainTheory.NeighbourhoodSystems.Exercise619.liftUp D hD x)))
  (∀ {D E : DomainTheory.NeighbourhoodSystems.Exercise619.ScottSys},
    @DomainTheory.NeighbourhoodSystems.Isomorphic DomainTheory.NeighbourhoodSystems.
  ExampleB.Str
```

```
        DomainTheory.NeighbourhoodSystems.ExampleB.Str (D.lift.oplus E.lift).sys (D.
    sum E).sys))
  (∀ {D E : DomainTheory.NeighbourhoodSystems.Exercise619.ScottSys},
    @DomainTheory.NeighbourhoodSystems.Isomorphic DomainTheory.NeighbourhoodSystems.
    ExampleB.Str
      DomainTheory.NeighbourhoodSystems.ExampleB.Str (D.lift.otimes E.lift).sys (D.
    prod E).lift.sys)
  (@And.intro
    (∀ {D : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
    NeighbourhoodSystems.ExampleB.Str}
      {hD :
        ∀ (X : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory.
    NeighbourhoodSystems.ExampleB.Str D X →
            @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str X}
      (z :
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
          (DomainTheory.NeighbourhoodSystems.Exercise619.liftTok D hD)),
      Or
        (@Eq
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
            (DomainTheory.NeighbourhoodSystems.Exercise619.liftTok D hD))
          z (DomainTheory.NeighbourhoodSystems.Exercise619.liftBot D hD))
        (∃ (x :
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
            D),
          @Eq
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
              DomainTheory.NeighbourhoodSystems.ExampleB.Str
              (DomainTheory.NeighbourhoodSystems.Exercise619.liftTok D hD))
            z (@DomainTheory.NeighbourhoodSystems.Exercise619.liftUp D hD x)))
    (∀ {D E : DomainTheory.NeighbourhoodSystems.Exercise619.ScottSys},
      @DomainTheory.NeighbourhoodSystems.Isomorphic DomainTheory.NeighbourhoodSystems.
    ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.Str (D.lift.oplus E.lift).sys (D.
    sum E).sys)
    @DomainTheory.NeighbourhoodSystems.Exercise619.eq_liftBot_or_exists_liftUp
    @DomainTheory.NeighbourhoodSystems.Exercise619.lift_oplus_lift_iso_sum)
  @DomainTheory.NeighbourhoodSystems.Exercise619.lift_otimes_lift_iso_lift_prod
end

end DomainTheory.NeighbourhoodSystems.Exercise619
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise619
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB
open DomainTheory.NeighbourhoodSystems.Exercise510

section
namespace Exercise627

variable {D₀ D₁ : NeighborhoodSystem Str}
```

```
def fstInj (D₀ D₁ : NeighborhoodSystem Str) : ApproximableMap D₀ (prodTok D₀ D₁) where
  rel X W := D₀.mem X ∧ (prodTok D₀ D₁).mem W ∧ prodTokNbhd X D₁.master ⊆ W
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨D₀.master_mem, (prodTok D₀ D₁).master_mem, subset_rfl⟩
  inter_right := by
    rintro X W W' ⟨hX, hW, hsub⟩ ⟨_, hW', hsub'⟩
    exact ⟨hX, (prodTok D₀ D₁).inter_mem hW hW' (prodTok_mem_prodTokNbhd hX D₁.
    master_mem)
      (Set.subset_inter hsub hsub'), Set.subset_inter hsub hsub'⟩
  mono := by
    rintro X X' W W' ⟨_, _, hsub⟩ hX'X hWW' hX' hW'
    exact ⟨hX', hW', ((prodTokNbhd_subset_iff.mpr ⟨hX'X, subset_rfl⟩).trans hsub).trans
     hWW'⟩

def fstProj (D₀ D₁ : NeighborhoodSystem Str) : ApproximableMap (prodTok D₀ D₁) D₀ where
  rel W X := (prodTok D₀ D₁).mem W ∧ D₀.mem X ∧ W ⊆ prodTokNbhd X D₁.master
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(prodTok D₀ D₁).master_mem, D₀.master_mem, subset_rfl⟩
  inter_right := by
    rintro W X X' ⟨hW, hX, hsub⟩ ⟨_, hX', hsub'⟩
    obtain ⟨A, B, hA, hB, rfl⟩ := hW
    have hAX : A ⊆ X := (prodTokNbhd_subset_iff.mp hsub).1
    have hAX' : A ⊆ X' := (prodTokNbhd_subset_iff.mp hsub').1
    exact ⟨prodTok_mem_prodTokNbhd hA hB, D₀.inter_mem hX hX' hA (Set.subset_inter hAX
    hAX'),
      prodTokNbhd_subset_iff.mpr ⟨Set.subset_inter hAX hAX', D₁.sub_master hB⟩⟩
  mono := by
    rintro W W' X X' ⟨_, _, hsub⟩ hW'W hXX' hW' hX'
    exact ⟨hW', hX', hW'W.trans (hsub.trans (prodTokNbhd_subset_iff.mpr ⟨hXX',
    subset_rfl⟩))⟩⟩

end Exercise627
end

section
namespace Exercise627

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

section Part5

variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

def incl (φ : (strictFun V₀ V₁).Element) : (funSpace V₀ V₁).Element :=
  toFilter (toStrictMap φ).1

theorem incl_mono : Monotone (incl (V₀ := V₀) (V₁ := V₁)) := by
  intro a b hab M hM
  obtain ⟨hMmem, haM⟩ := hM
  obtain ⟨⟨L, hL, rfl⟩, hne⟩ := hMmem
  refine ⟨⟨⟨L, hL, rfl⟩, hne⟩, ?_⟩
  intro p hp
```

```
  have hle : (toStrictMap a).1 ≤ (toStrictMap b).1 := (strictFunEquiv V₀ V₁).monotone
    hab
  exact hle p.1 p.2 (haM p hp)

def inclMap : ApproximableMap (strictFun V₀ V₁) (funSpace V₀ V₁) :=
  ofMono (fun _ hW => incl ((strictFun V₀ V₁).principal hW))
    (fun _ _ hW hW' hW'W => incl_mono (((strictFun V₀ V₁).principal_le_iff hW hW').mpr
    hW'W))

end Part5

def leftN (D₀ D₁ : NeighborhoodSystem Str) (X : Set Str) : Set Str :=
  embBit false X ∪ {w | w ∈ sumTokMaster D₀ D₁ ∧ X = D₀.master}

theorem X_eq_master_of_embT_subset_leftN {B X : Set Str} (hB : B.Nonempty)
    (h : embBit true B ⊆ leftN D₀ D₁ X) : X = D₀.master := by
  obtain ⟨σ, hσ⟩ := hB
  rcases h ⟨σ, rfl, hσ⟩ with ⟨w', hw', -⟩ | ⟨-, hXm⟩
  · rw [List.cons.injEq] at hw'; exact absurd hw'.1 (by decide)
  · exact hXm

theorem X_eq_master_of_nil_mem_leftN {X : Set Str} (h : ([] : Str) ∈ leftN D₀ D₁ X) :
    X = D₀.master := by
  rcases h with h | ⟨-, h⟩
  · exact absurd h nil_not_mem_embBit
  · exact h

theorem embF_subset_leftN {X : Set Str} : embBit false X ⊆ leftN D₀ D₁ X :=
  Set.subset_union_left

theorem leftN_master : leftN D₀ D₁ D₀.master = sumTokMaster D₀ D₁ := by
  apply Set.eq_of_subset_of_subset
  · rintro w (hw | ⟨hw, -⟩)
    · exact embF_subset_sumTokMaster D₀.master_mem hw
    · exact hw
  · exact fun w hw => Or.inr ⟨hw, rfl⟩

theorem leftN_proper {X : Set Str} (hne : X = D₀.master) : leftN D₀ D₁ X = embBit false
    X := by
  apply Set.eq_of_subset_of_subset
  · rintro w (hw | ⟨-, hXm⟩)
    · exact hw
    · exact absurd hXm hne
  · exact embF_subset_leftN

theorem oplus_mem_leftN {X : Set Str} (hX : D₀.mem X) :
    (oplusTok D₀ D₁ h₀ h₁).mem (leftN D₀ D₁ X) := by
  by_cases h : X = D₀.master
  · rw [h, leftN_master]; exact (oplusTok D₀ D₁ h₀ h₁).master_mem
  · rw [leftN_proper h]; exact oplusTok_mem_embF hX h

section Part5

variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

def strictifyMap (g : ApproximableMap V₀ V₁) : ApproximableMap V₀ V₁ where
```

```
  rel X Y := g.rel X Y ∧ (X = V₀.master → Y = V₁.master)
  rel_dom h := g.rel_dom h.1
  rel_cod h := g.rel_cod h.1
  master_rel := ⟨g.master_rel, fun _ => rfl⟩
  inter_right := by
    rintro X Y Y' ⟨hg, hs⟩ ⟨hg', hs'⟩
    exact ⟨g.inter_right hg hg', fun hX => by rw [hs hX, hs' hX, Set.inter_self]⟩
  mono := by
    rintro X X' Y Y' ⟨hg, hs⟩ hX'X hYY' hX' hY'
    refine ⟨g.mono hg hX'X hYY' hX' hY', fun hX'm => ?_⟩
    have hX : V₀.mem X := g.rel_dom hg
    have hXm : X = V₀.master := Set.Subset.antisymm (V₀.sub_master hX) (hX'm ▶ hX'X)
    exact Set.Subset.antisymm (V₁.sub_master hY') ((hs hXm) ▶ hYY')

theorem strictifyMap_isStrict (g : ApproximableMap V₀ V₁) : IsStrict (strictifyMap g)
    :=
  fun _ h => h.2 rfl

def strictify (g : ApproximableMap V₀ V₁) : StrictMap V₀ V₁ := ⟨strictifyMap g,
    strictifyMap_isStrict g⟩

def strct (ψ : (funSpace V₀ V₁).Element) : (strictFun V₀ V₁).Element :=
  toStrictFilter (strictify (toApproxMap ψ))

theorem strct_mono : Monotone (strct (V₀ := V₀) (V₁ := V₁)) := by
  intro a b hab W hW
  obtain ⟨hWmem, haW⟩ := hW
  obtain ⟨⟨L, hL, rfl⟩, hne⟩ := hWmem
  refine ⟨⟨L, hL, rfl⟩, hne⟩, ?_⟩
  intro p hp
  have hle : toApproxMap a ≤ toApproxMap b := (funSpaceEquiv V₀ V₁).monotone hab
  exact ⟨hle p.1 p.2 (haW p hp).1, (haW p hp).2⟩

def strctMap : ApproximableMap (funSpace V₀ V₁) (strictFun V₀ V₁) :=
  ofMono (fun _ hM => strct ((funSpace V₀ V₁).principal hM))
    (fun _ _ hM hM' hM'M => strct_mono (((funSpace V₀ V₁).principal_le_iff hM hM').mpr
    hM'M))

end Part5

theorem subset_of_embF_subset_leftN {A X : Set Str} (hA : A ⊆ D₀.master)
    (h : embBit false A ⊆ leftN D₀ D₁ X) : A ⊆ X := by
  intro σ hσ
  rcases h ⟨σ, rfl, hσ⟩ with ⟨w', hw', hw'X⟩ | ⟨-, hXm⟩
  · rw [List.cons.injEq] at hw'; rw [hw'.2]; exact hw'X
  · rw [hXm]; exact hA hσ

theorem leftN_subset_iff {X X' : Set Str} (hX : D₀.mem X) (hX' : D₀.mem X') :
    leftN D₀ D₁ X ⊆ leftN D₀ D₁ X' ↔ X ⊆ X' := by
  constructor
  · intro h
    exact subset_of_embF_subset_leftN (D₀.sub_master hX) (embF_subset_leftN.trans h)
  · intro hXX'
    rintro w (⟨w', rfl, hw'⟩ | ⟨hw, hXm⟩)
    · exact embF_subset_leftN ⟨w', rfl, hXX' hw'⟩
    · exact Or.inr ⟨hw, Set.Subset.antisymm (D₀.sub_master hX') (hXm ▶ hXX')⟩
```

```
def inlInj : ApproximableMap D₀ (oplusTok D₀ D₁ h₀ h₁) where
  rel X W := D₀.mem X ∧ (oplusTok D₀ D₁ h₀ h₁).mem W ∧ leftN D₀ D₁ X ⊆ W
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨D₀.master_mem, (oplusTok D₀ D₁ h₀ h₁).master_mem, leftN_master.le⟩
  inter_right := by
    rintro X W W' ⟨hX, hW, hsub⟩ ⟨_, hW', hsub'⟩
    exact ⟨hX, (oplusTok D₀ D₁ h₀ h₁).inter_mem hW hW' (oplus_mem_leftN hX)
      (Set.subset_inter hsub hsub'), Set.subset_inter hsub hsub'⟩
  mono := by
    rintro X X' W W' ⟨hX, _, hsub⟩ hX'X hWW' hX' hW'
    exact ⟨hX', hW', ((leftN_subset_iff hX' hX).mpr hX'X).trans (hsub.trans hWW')⟩

def inlProj : ApproximableMap (oplusTok D₀ D₁ h₀ h₁) D₀ where
  rel W X := (oplusTok D₀ D₁ h₀ h₁).mem W ∧ D₀.mem X ∧ W ⊆ leftN D₀ D₁ X
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(oplusTok D₀ D₁ h₀ h₁).master_mem, D₀.master_mem, leftN_master.ge⟩
  inter_right := by
    rintro W X X' ⟨hW, hX, hsub⟩ ⟨_, hX', hsub'⟩
    rcases hW with rfl | ⟨A, hA, hAne, rfl⟩ | ⟨B, hB, hBne, rfl⟩
    · have hXm := X_eq_master_of_nil_mem_leftN (hsub nil_mem_sumTokMaster)
      have hX'm := X_eq_master_of_nil_mem_leftN (hsub' nil_mem_sumTokMaster)
      subst hXm; subst hX'm; rw [Set.inter_self]
      exact ⟨Or.inl rfl, D₀.master_mem, leftN_master.ge⟩
    · have hAX : A ⊆ X := subset_of_embF_subset_leftN (D₀.sub_master hA) hsub
      have hAX' : A ⊆ X' := subset_of_embF_subset_leftN (D₀.sub_master hA) hsub'
      exact ⟨oplusTok_mem_embF hA hAne, D₀.inter_mem hX hX' hA (Set.subset_inter hAX
    hAX'),
        (embBit_subset.mpr (Set.subset_inter hAX hAX')).trans embF_subset_leftN⟩
    · have hXm := X_eq_master_of_embT_subset_leftN (h₁ B hB) hsub
      have hX'm := X_eq_master_of_embT_subset_leftN (h₁ B hB) hsub'
      subst hXm; subst hX'm; rw [Set.inter_self]
      exact ⟨oplusTok_mem_embT hB hBne, D₀.master_mem, by
        rw [leftN_master]; exact embT_subset_sumTokMaster hB⟩
  mono := by
    rintro W W' X X' ⟨_, hX, hsub⟩ hW'W hXX' hW' hX'
    exact ⟨hW', hX', hW'W.trans (hsub.trans ((leftN_subset_iff hX hX').mpr hXX'))⟩

def twoPt : NeighborhoodSystem Str where
  mem X := X = Set.univ ∨ X = {[]}
  master := Set.univ
  master_nonempty := ⟨[], Set.mem_univ _⟩
  master_mem := Or.inl rfl
  sub_master := by
    rintro X (rfl | rfl)
    · exact subset_rfl
    · exact Set.subset_univ _
  inter_mem := by
    rintro X Y Z (rfl | rfl) (rfl | rfl) _ _
    · rw [Set.inter_self]; exact Or.inl rfl
    · rw [Set.univ_inter]; exact Or.inr rfl
    · rw [Set.inter_univ]; exact Or.inr rfl
    · rw [Set.inter_self]; exact Or.inr rfl
```

```
def unitPt : NeighborhoodSystem Str := (singletonSys ({[]} : Set Str) ⟨[], rfl⟩).sys

theorem inlProj_comp_inlInj :
    (inlProj (D₀ := D₀) (D₁ := D₁) (h₀ := h₀) (h₁ := h₁)).comp inlInj = idMap D₀ := by
  apply ApproximableMap.ext
  intro X Z
  rw [comp_rel, idMap_rel]
  constructor
  · rintro ⟨W, ⟨hX, _, hsub⟩, _, hZ, hsub'⟩
    exact ⟨hX, hZ, (leftN_subset_iff hX hZ).mp (hsub.trans hsub')⟩
  · rintro ⟨hX, hZ, hXZ⟩
    exact ⟨leftN D₀ D₁ X, ⟨hX, oplus_mem_leftN hX, subset_rfl⟩,
      oplus_mem_leftN hX, hZ, (leftN_subset_iff hX hZ).mpr hXZ⟩

theorem inlInj_comp_inlProj_le :
    (inlInj (D₀ := D₀) (D₁ := D₁) (h₀ := h₀) (h₁ := h₁)).comp inlProj
      ≤ idMap (oplusTok D₀ D₁ h₀ h₁) := by
  intro W W' hr
  obtain ⟨X, ⟨hW, _, hsub⟩, _, hW', hsub'⟩ := hr
  exact ⟨hW, hW', hsub.trans hsub'⟩

end Exercise627
end
end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 6.26. For systems $\mathcal{D}$ as in 6.19 define

$$\mathcal{D}_\perp = \{\{\Lambda\} \cup 0\Delta\} \cup \{0X \mid X \in \mathcal{D}\}.$$

Describe the construct in terms of elements. Is this a suitable functor? Prove that

$$\mathcal{D}_\perp \oplus \mathcal{E}_\perp \cong \mathcal{D} + \mathcal{E}.$$

What is

$$\mathcal{D}_\perp \otimes \mathcal{E}_\perp \cong ??$$

3.7.29 Exercise 6.27 — which embeddings hold

Exercise_6_27.lean

```
module

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_12
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_26

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Proposition_6_12
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

section
```

```
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise619
open DomainTheory.NeighbourhoodSystems.Example62 DomainTheory.NeighbourhoodSystems.
    ExampleB
open DomainTheory.NeighbourhoodSystems.Exercise510
section
namespace Exercise627
variable {D₀ D₁ : NeighborhoodSystem Str}
variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

theorem inl_trianglelefteq_oplus :
    D₀ ? oplusTok D₀ D₁ h₀ h₁ :=
  trianglelefteq_of_projectionPair inlInj inlProj inlProj_comp_inlInj
    inlInj_comp_inlProj_le

section Part5

variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

theorem ext_of_principal {? ? : Type*} {W₀ : NeighborhoodSystem ?} {W₁ :
    NeighborhoodSystem ?}
    {f g : ApproximableMap W₀ W₁}
    (h : ∀ (X : Set ?) (hX : W₀.mem X),
      f.toElementMap (W₀.principal hX) = g.toElementMap (W₀.principal hX)) : f = g :=
    by
  apply ApproximableMap.ext
  intro X Y
  constructor
  · intro hr
    have hX := f.rel_dom hr
    rw [g.rel_iff_mem_principal hX, ← h X hX, ← f.rel_iff_mem_principal hX]; exact hr
  · intro hr
    have hX := g.rel_dom hr
    rw [f.rel_iff_mem_principal hX, h X hX, ← g.rel_iff_mem_principal hX]; exact hr

end Part5

end Exercise627
end

section
namespace Exercise627

variable {D₀ D₁ : NeighborhoodSystem Str}

theorem fstInj_comp_fstProj_le (D₀ D₁ : NeighborhoodSystem Str) :
    (fstInj D₀ D₁).comp (fstProj D₀ D₁) ≤ idMap (prodTok D₀ D₁) := by
  intro W W' hr
  obtain ⟨X, ⟨hW, _, hsub⟩, _, hW', hsub'⟩ := hr
  exact ⟨hW, hW', hsub.trans hsub'⟩

theorem fstProj_comp_fstInj (D₀ D₁ : NeighborhoodSystem Str) :
    (fstProj D₀ D₁).comp (fstInj D₀ D₁) = idMap D₀ := by
  apply ApproximableMap.ext
  intro X Z
  rw [comp_rel, idMap_rel]
```

```
  constructor
  · rintro ⟨W, ⟨hX, _, hsub⟩, _, hZ, hsub'⟩
    exact ⟨hX, hZ, (prodTokNbhd_subset_iff.mp (hsub.trans hsub')).1⟩
  · rintro ⟨hX, hZ, hXZ⟩
    exact ⟨prodTokNbhd Z D₁.master,
      ⟨hX, prodTok_mem_prodTokNbhd hZ D₁.master_mem,
        prodTokNbhd_subset_iff.mpr ⟨hXZ, subset_rfl⟩⟩,
      prodTok_mem_prodTokNbhd hZ D₁.master_mem, hZ, subset_rfl⟩

theorem fst_trianglelefteq_prod (D₀ D₁ : NeighborhoodSystem Str) :
    D₀ ? prodTok D₀ D₁ :=
  trianglelefteq_of_projectionPair (fstInj D₀ D₁) (fstProj D₀ D₁)
    (fstProj_comp_fstInj D₀ D₁) (fstInj_comp_fstProj_le D₀ D₁)

end Exercise627
end

section
namespace Exercise627

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

theorem oplusTok_subsystem_sumTok (h₀ : ∀ X, D₀.mem X → X.Nonempty)
    (h₁ : ∀ Y, D₁.mem Y → Y.Nonempty) :
    oplusTok D₀ D₁ h₀ h₁ ? sumTok D₀ D₁ h₀ h₁ where
  master_eq := rfl
  sub := by
    rintro W (rfl | ⟨X, hX, -, rfl⟩ | ⟨Y, hY, -, rfl⟩)
    · exact Or.inl rfl
    · exact sumTok_mem_embF hX
    · exact sumTok_mem_embT hY
  inter_closed := by
    rintro W W' (rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩)
      (rfl | ⟨X', hX', hX'ne, rfl⟩ | ⟨Y', hY', hY'ne, rfl⟩) hInt
    · rw [Set.inter_self]; exact Or.inl rfl
    · rw [sumTokMaster_inter_embF hX']; exact oplusTok_mem_embF hX' hX'ne
    · rw [sumTokMaster_inter_embT hY']; exact oplusTok_mem_embT hY' hY'ne
    · rw [Set.inter_comm, sumTokMaster_inter_embF hX]; exact oplusTok_mem_embF hX hXne
    · rw [embBit_inter] at hInt ⊢
      exact oplusTok_mem_embF (sumTok_mem_embF_inv hInt)
        (inter_ne_of_ne_left (D₀.sub_master hX) hXne)
    · rw [embBit_inter_ne (show (false : Bool) = true by decide)] at hInt
      exact absurd (sumTok_mem_nonempty hInt) Set.not_nonempty_empty
    · rw [Set.inter_comm, sumTokMaster_inter_embT hY]; exact oplusTok_mem_embT hY hYne
    · rw [embBit_inter_ne (show (true : Bool) = false by decide)] at hInt
      exact absurd (sumTok_mem_nonempty hInt) Set.not_nonempty_empty
    · rw [embBit_inter] at hInt ⊢
      exact oplusTok_mem_embT (sumTok_mem_embT_inv hInt)
        (inter_ne_of_ne_left (D₁.sub_master hY) hYne)

theorem oplus_trianglelefteq_sum (h₀ : ∀ X, D₀.mem X → X.Nonempty)
    (h₁ : ∀ Y, D₁.mem Y → Y.Nonempty) :
    oplusTok D₀ D₁ h₀ h₁ ? sumTok D₀ D₁ h₀ h₁ :=
  (oplusTok_subsystem_sumTok h₀ h₁).trianglelefteq
```

```
end Exercise627
end

section
namespace Exercise627

variable {D₀ D₁ : NeighborhoodSystem Str}

theorem otimesTok_subsystem_prodTok (D₀ D₁ : NeighborhoodSystem Str) :
    otimesTok D₀ D₁ ≤ prodTok D₀ D₁ where
  master_eq := rfl
  sub := by
    rintro W (rfl | ⟨X, Y, hX, hY, -, -, rfl⟩)
    · exact ⟨D₀.master, D₁.master, D₀.master_mem, D₁.master_mem, rfl⟩
    · exact ⟨X, Y, hX, hY, rfl⟩
  inter_closed := by
    rintro W W' (rfl | ⟨X, Y, hX, hY, hXne, hYne, rfl⟩)
      (rfl | ⟨X', Y', hX', hY', hX'ne, hY'ne, rfl⟩) hInt
    · rw [Set.inter_self]; exact Or.inl rfl
    · rw [prodTokNbhd_inter, Set.inter_eq_right.mpr (D₀.sub_master hX'),
        Set.inter_eq_right.mpr (D₁.sub_master hY')]
      exact Or.inr ⟨X', Y', hX', hY', hX'ne, hY'ne, rfl⟩
    · rw [Set.inter_comm, prodTokNbhd_inter, Set.inter_eq_right.mpr (D₀.sub_master hX),
        Set.inter_eq_right.mpr (D₁.sub_master hY)]
      exact Or.inr ⟨X, Y, hX, hY, hXne, hYne, rfl⟩
    · rw [prodTokNbhd_inter] at hInt ⊢
      obtain ⟨A, B, hA, hB, heq⟩ := hInt
      obtain ⟨rfl, rfl⟩ := prodTokNbhd_injective heq
      exact Or.inr ⟨X ∩ X', Y ∩ Y', hA, hB,
        inter_ne_of_ne_left (D₀.sub_master hX) hXne,
        inter_ne_of_ne_left (D₁.sub_master hY) hYne, rfl⟩

theorem otimes_trianglelefteq_prod (D₀ D₁ : NeighborhoodSystem Str) :
    otimesTok D₀ D₁ ≤ prodTok D₀ D₁ :=
  (otimesTok_subsystem_prodTok D₀ D₁).trianglelefteq

end Exercise627
end

section
namespace Exercise627

variable {D₀ D₁ : NeighborhoodSystem Str}

variable {h₀ : ∀ X, D₀.mem X → X.Nonempty} {h₁ : ∀ Y, D₁.mem Y → Y.Nonempty}

theorem otimes_unitPt_collapse :
    ∀ W, (otimesTok twoPt unitPt).mem W → W = (otimesTok twoPt unitPt).master := by
  rintro W (rfl | ⟨X, Y, _, hY, _, hYne, rfl⟩)
  · rfl
  · exact absurd hY hYne

section Part5

variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
```

```
theorem strictifyMap_le (g : ApproximableMap V₀ V₁) : strictifyMap g ≤ g := fun _ _ h
    => h.1

theorem strictifyMap_of_isStrict {f : ApproximableMap V₀ V₁} (hf : IsStrict f) :
    strictifyMap f = f := by
  apply ApproximableMap.ext
  intro X Y
  exact ⟨fun h => h.1, fun h => ⟨h, fun hXm => hf (hXm ▸ h)⟩⟩

end Part5

theorem subsingleton_element_of_only_master {? : Type*} {V : NeighborhoodSystem ?}
    (h : ∀ X, V.mem X → X = V.master) : Subsingleton V.Element := by
  refine ⟨fun x y => ?_⟩
  apply Element.ext
  intro X
  constructor
  · intro hx; have hXm := h X (x.sub hx); rw [hXm]; exact y.master_mem
  · intro hy; have hXm := h X (y.sub hy); rw [hXm]; exact x.master_mem

theorem not_trianglelefteq_otimes :
    ¬ (twoPt ? otimesTok twoPt unitPt) := by
  rintro ⟨D', hsub, ⟨e⟩⟩
  have hD'only : ∀ X, D'.mem X → X = D'.master := by
    intro X hX
    rw [otimes_unitPt_collapse X (hsub.sub hX)]; exact hsub.master_eq.symm
  have hss : Subsingleton D'.Element := subsingleton_element_of_only_master hD'only
  have hPmem : twoPt.mem ({[]} : Set Str) := Or.inr rfl
  have hne : twoPt.principal hPmem = twoPt.principal twoPt.master_mem := by
    intro heq
    have h1 : (twoPt.principal hPmem).mem ({[]} : Set Str) := ⟨hPmem, subset_rfl⟩
    rw [heq] at h1
    obtain ⟨-, h2⟩ := h1
    exact absurd (Set.mem_singleton_iff.mp (h2 (Set.mem_univ ([false] : Str))) :
      ([false] : Str) = []) (by decide)
  exact hne (e.injective (hss.allEq (e (twoPt.principal hPmem))
    (e (twoPt.principal twoPt.master_mem))))

section Part5

variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

theorem toApproxMap_toFilter (g : ApproximableMap V₀ V₁) : toApproxMap (toFilter g) = g
    :=
  (funSpaceEquiv V₀ V₁).apply_symm_apply g

theorem toElementMap_inclMap (φ : (strictFun V₀ V₁).Element) :
    inclMap.toElementMap φ = incl φ := by
  apply Element.ext
  intro M
  constructor
  · rintro ⟨W, hφW, _, hincl⟩
    obtain ⟨hMmem, hg⟩ := hincl
    obtain ⟨⟨L, hL, rfl⟩, hne⟩ := hMmem
    refine ⟨⟨⟨L, hL, rfl⟩, hne⟩, ?_⟩
```

```
    intro p hp
    obtain ⟨hsstep, hWsub⟩ := toStrictMap_rel.mp (hg p hp)
    exact φ.up_mem hφW hsstep hWsub
  · rintro ⟨hMmem, hgφ⟩
    obtain ⟨⟨L, hL, rfl⟩, hne⟩ := hMmem
    have hφL : φ.mem (sstepFun L) :=
      (mem_sstepFun_iff φ hL).mpr (fun p hp => toStrictMap_rel.mp (hgφ p hp))
    refine ⟨sstepFun L, hφL, φ.sub hφL, ⟨⟨L, hL, rfl⟩, hne⟩, ?_⟩
    intro p hp
    exact ⟨φ.sub (toStrictMap_rel.mp (hgφ p hp)), fun f hf => hf p hp⟩

theorem toElementMap_strctMap (ψ : (funSpace V₀ V₁).Element) :
    strctMap.toElementMap ψ = strct ψ := by
  apply Element.ext
  intro W
  constructor
  · rintro ⟨M, hψM, _, hstrct⟩
    obtain ⟨hWmem, hg⟩ := hstrct
    obtain ⟨⟨L, hL, rfl⟩, hne⟩ := hWmem
    refine ⟨⟨⟨L, hL, rfl⟩, hne⟩, ?_⟩
    intro p hp
    obtain ⟨hstepmem, hMsub⟩ := (hg p hp).1
    exact ⟨ψ.up_mem hψM hstepmem hMsub, (hg p hp).2⟩
  · rintro ⟨hWmem, hgψ⟩
    obtain ⟨⟨L, hL, rfl⟩, hne⟩ := hWmem
    have hψL : ψ.mem (stepFun L) :=
      (mem_stepFun_iff ψ hL).mpr (fun p hp => (hgψ p hp).1)
    refine ⟨stepFun L, hψL, ψ.sub hψL, ⟨⟨L, hL, rfl⟩, hne⟩, ?_⟩
    intro p hp
    exact ⟨⟨ψ.sub (hgψ p hp).1, fun f hf => hf p hp⟩, (hgψ p hp).2⟩

theorem toFilter_toApproxMap (ψ : (funSpace V₀ V₁).Element) : toFilter (toApproxMap ψ)
    = ψ :=
  (funSpaceEquiv V₀ V₁).symm_apply_apply ψ

theorem toStrictFilter_toStrictMap (φ : (strictFun V₀ V₁).Element) :
    toStrictFilter (toStrictMap φ) = φ :=
  (strictFunEquiv V₀ V₁).symm_apply_apply φ

theorem strct_incl (φ : (strictFun V₀ V₁).Element) : strct (incl φ) = φ := by
  show toStrictFilter (strictify (toApproxMap (toFilter (toStrictMap φ).1))) = φ
  rw [toApproxMap_toFilter,
    show strictify (toStrictMap φ).1 = toStrictMap φ from
      Subtype.ext (strictifyMap_of_isStrict (toStrictMap φ).2)]
  exact toStrictFilter_toStrictMap φ

theorem strctMap_comp_inclMap :
    (strctMap (V₀ := V₀) (V₁ := V₁)).comp inclMap = idMap (strictFun V₀ V₁) := by
  apply ext_of_principal
  intro X hX
  rw [toElementMap_comp, toElementMap_inclMap, toElementMap_strctMap, strct_incl,
    toElementMap_idMap]

theorem toStrictMap_toStrictFilter (g : StrictMap V₀ V₁) : toStrictMap (toStrictFilter
    g) = g :=
  (strictFunEquiv V₀ V₁).apply_symm_apply g
```

```
theorem incl_strct_le (ψ : (funSpace V₀ V₁).Element) : incl (strct ψ) ≤ ψ := by
  have key : incl (strct ψ) = toFilter (strictifyMap (toApproxMap ψ)) := by
    show toFilter (toStrictMap (strct ψ)).1 = toFilter (strictifyMap (toApproxMap ψ))
    rw [show toStrictMap (strct ψ) = strictify (toApproxMap ψ) from
    toStrictMap_toStrictFilter _]
    rfl
  rw [key]
  conv_rhs => rw [← toFilter_toApproxMap ψ]
  exact (funSpaceEquiv V₀ V₁).symm.monotone (strictifyMap_le (toApproxMap ψ))

theorem inclMap_comp_strctMap_le :
    (inclMap (V₀ := V₀) (V₁ := V₁)).comp strctMap ≤ idMap (funSpace V₀ V₁) := by
  rw [le_iff_toElementMap_le]
  intro ψ
  rw [toElementMap_comp, toElementMap_strctMap, toElementMap_inclMap,
    toElementMap_idMap]
  exact incl_strct_le ψ

theorem strictFun_trianglelefteq_funSpace (V₀ : NeighborhoodSystem α) (V₁ :
    NeighborhoodSystem β) :
    strictFun V₀ V₁ ? funSpace V₀ V₁ :=
  trianglelefteq_of_projectionPair inclMap strctMap strctMap_comp_inclMap
    inclMap_comp_strctMap_le

end Part5

end Exercise627
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise627
section
set_option linter.unusedVariables false

theorem example_627.{u_1, u_2} : And
  (And
    (And
      (And
        (And
          (∀
            (D₀ D₁ :
              DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
    NeighbourhoodSystems.ExampleB.Str),
            @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
              DomainTheory.NeighbourhoodSystems.ExampleB.Str
              (DomainTheory.NeighbourhoodSystems.Exercise619.otimesTok D₀ D₁)
              (DomainTheory.NeighbourhoodSystems.Exercise619.prodTok D₀ D₁))
          (∀
            {D₀ D₁ :
              DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
    NeighbourhoodSystems.ExampleB.Str}
            {h₀ :
              ∀ (X : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
```

```
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory
  .NeighbourhoodSystems.ExampleB.Str
                  D₀ X →
                @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str X}
          {h₁ :
            ∀ (Y : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory
  .NeighbourhoodSystems.ExampleB.Str
                  D₁ Y →
                @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str Y},
          @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
            DomainTheory.NeighbourhoodSystems.ExampleB.Str D₀
            (DomainTheory.NeighbourhoodSystems.Exercise619.oplusTok D₀ D₁ h₀ h₁)))
      (∀
        (D₀ D₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str),
        @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
          DomainTheory.NeighbourhoodSystems.ExampleB.Str D₀
          (DomainTheory.NeighbourhoodSystems.Exercise619.prodTok D₀ D₁)))
     (Not
       (@DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
         DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.Exercise627.twoPt
         (DomainTheory.NeighbourhoodSystems.Exercise619.otimesTok DomainTheory.
  NeighbourhoodSystems.Exercise627.twoPt
           DomainTheory.NeighbourhoodSystems.Exercise627.unitPt))))
   (∀ {D₀ D₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str}
     (h₀ :
       ∀ (X : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
         @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str D₀
           X →
         @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str X)
     (h₁ :
       ∀ (Y : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
         @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str D₁
           Y →
         @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str Y),
     @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
       DomainTheory.NeighbourhoodSystems.ExampleB.Str
       (DomainTheory.NeighbourhoodSystems.Exercise619.oplusTok D₀ D₁ h₀ h₁)
       (DomainTheory.NeighbourhoodSystems.Exercise619.sumTok D₀ D₁ h₀ h₁)))
(∀ {α : Type u_1} {β : Type u_2} (V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α)
  (V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β),
  @DomainTheory.NeighbourhoodSystems.Trianglelefteq
    (@DomainTheory.NeighbourhoodSystems.Exercise510.StrictMap α β V₀ V₁)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
    (@DomainTheory.NeighbourhoodSystems.Exercise510.strictFun α β V₀ V₁)
    (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)) :=
```

```
@And.intro
(And
  (And
    (And
      (And
        (∀
          (D₀ D₁ :
            DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str),
          @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
            DomainTheory.NeighbourhoodSystems.ExampleB.Str
            (DomainTheory.NeighbourhoodSystems.Exercise619.otimesTok D₀ D₁)
            (DomainTheory.NeighbourhoodSystems.Exercise619.prodTok D₀ D₁))
        (∀
          {D₀ D₁ :
            DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str}
          {h₀ :
            ∀ (X : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory
  .NeighbourhoodSystems.ExampleB.Str
                D₀ X →
              @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str X}
          {h₁ :
            ∀ (Y : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory
  .NeighbourhoodSystems.ExampleB.Str
                D₁ Y →
              @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str Y},
          @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
  NeighbourhoodSystems.ExampleB.Str


            DomainTheory.NeighbourhoodSystems.ExampleB.Str D₀
            (DomainTheory.NeighbourhoodSystems.Exercise619.oplusTok D₀ D₁ h₀ h₁)))
      (∀
        (D₀ D₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str),
        @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
          DomainTheory.NeighbourhoodSystems.ExampleB.Str D₀
          (DomainTheory.NeighbourhoodSystems.Exercise619.prodTok D₀ D₁)))
    (Not
      (@DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
  NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
  NeighbourhoodSystems.Exercise627.twoPt
        (DomainTheory.NeighbourhoodSystems.Exercise619.otimesTok DomainTheory.
  NeighbourhoodSystems.Exercise627.twoPt
          DomainTheory.NeighbourhoodSystems.Exercise627.unitPt))))
   (∀ {D₀ D₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str}
    (h₀ :
      ∀ (X : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory.
  NeighbourhoodSystems.ExampleB.Str D₀
```

```
          X →
         @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str X)
    (h₁ :
      ∀ (Y : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory.
 NeighbourhoodSystems.ExampleB.Str D₁
          Y →
         @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str Y),
   @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
 NeighbourhoodSystems.ExampleB.Str
     DomainTheory.NeighbourhoodSystems.ExampleB.Str
     (DomainTheory.NeighbourhoodSystems.Exercise619.oplusTok D₀ D₁ h₀ h₁)
     (DomainTheory.NeighbourhoodSystems.Exercise619.sumTok D₀ D₁ h₀ h₁)))
(∀ {α : Type u_1} {β : Type u_2} (V₀ : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α)
 (V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β),
 @DomainTheory.NeighbourhoodSystems.Trianglelefteq
   (@DomainTheory.NeighbourhoodSystems.Exercise510.StrictMap α β V₀ V₁)
   (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
   (@DomainTheory.NeighbourhoodSystems.Exercise510.strictFun α β V₀ V₁)
   (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁))
(@And.intro
 (And
   (And
     (And
       (∀
         (D₀ D₁ :
           DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
 NeighbourhoodSystems.ExampleB.Str),
         @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
 NeighbourhoodSystems.ExampleB.Str
           DomainTheory.NeighbourhoodSystems.ExampleB.Str
           (DomainTheory.NeighbourhoodSystems.Exercise619.otimesTok D₀ D₁)
           (DomainTheory.NeighbourhoodSystems.Exercise619.prodTok D₀ D₁))
       (∀
         {D₀ D₁ :
           DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
 NeighbourhoodSystems.ExampleB.Str}
         {h₀ :
           ∀ (X : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
             @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory
 .NeighbourhoodSystems.ExampleB.Str
               D₀ X →
              @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str X}
         {h₁ :
           ∀ (Y : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
             @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory
 .NeighbourhoodSystems.ExampleB.Str
               D₁ Y →
              @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str Y},
         @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
 NeighbourhoodSystems.ExampleB.Str
           DomainTheory.NeighbourhoodSystems.ExampleB.Str D₀
           (DomainTheory.NeighbourhoodSystems.Exercise619.oplusTok D₀ D₁ h₀ h₁)))
     (∀
       (D₀ D₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
```

```
NeighbourhoodSystems.ExampleB.Str),
       @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
NeighbourhoodSystems.ExampleB.Str
         DomainTheory.NeighbourhoodSystems.ExampleB.Str D₀
         (DomainTheory.NeighbourhoodSystems.Exercise619.prodTok D₀ D₁)))
   (Not
     (@DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
NeighbourhoodSystems.ExampleB.Str
       DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
NeighbourhoodSystems.Exercise627.twoPt
       (DomainTheory.NeighbourhoodSystems.Exercise619.otimesTok DomainTheory.
NeighbourhoodSystems.Exercise627.twoPt
         DomainTheory.NeighbourhoodSystems.Exercise627.unitPt))))
 (∀ {D₀ D₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
NeighbourhoodSystems.ExampleB.Str}
   (h₀ :
     ∀ (X : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory.
NeighbourhoodSystems.ExampleB.Str D₀
           X →
         @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str X)
   (h₁ :
     ∀ (Y : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory.
NeighbourhoodSystems.ExampleB.Str D₁
           Y →
         @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str Y),
   @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
NeighbourhoodSystems.ExampleB.Str
     DomainTheory.NeighbourhoodSystems.ExampleB.Str
     (DomainTheory.NeighbourhoodSystems.Exercise619.oplusTok D₀ D₁ h₀ h₁)
     (DomainTheory.NeighbourhoodSystems.Exercise619.sumTok D₀ D₁ h₀ h₁))
 (@And.intro
   (And
     (And
       (∀
         (D₀ D₁ :
           DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
NeighbourhoodSystems.ExampleB.Str),
         @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
NeighbourhoodSystems.ExampleB.Str
           DomainTheory.NeighbourhoodSystems.ExampleB.Str
           (DomainTheory.NeighbourhoodSystems.Exercise619.otimesTok D₀ D₁)
           (DomainTheory.NeighbourhoodSystems.Exercise619.prodTok D₀ D₁))
       (∀
         {D₀ D₁ :
           DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
NeighbourhoodSystems.ExampleB.Str}
         {h₀ :
           ∀ (X : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
             @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory
.NeighbourhoodSystems.ExampleB.Str
                 D₀ X →
               @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str X}
         {h₁ :
           ∀ (Y : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
```

```
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory
.NeighbourhoodSystems.ExampleB.Str
                D₁ Y →
              @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str Y},
        @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
NeighbourhoodSystems.ExampleB.Str
          DomainTheory.NeighbourhoodSystems.ExampleB.Str D₀
          (DomainTheory.NeighbourhoodSystems.Exercise619.oplusTok D₀ D₁ h₀ h₁)))
    (∀
      (D₀ D₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
NeighbourhoodSystems.ExampleB.Str),
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
NeighbourhoodSystems.ExampleB.Str
        DomainTheory.NeighbourhoodSystems.ExampleB.Str D₀
        (DomainTheory.NeighbourhoodSystems.Exercise619.prodTok D₀ D₁)))
  (Not
    (@DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
NeighbourhoodSystems.ExampleB.Str
      DomainTheory.NeighbourhoodSystems.ExampleB.Str DomainTheory.
NeighbourhoodSystems.Exercise627.twoPt
      (DomainTheory.NeighbourhoodSystems.Exercise619.otimesTok DomainTheory.
NeighbourhoodSystems.Exercise627.twoPt
        DomainTheory.NeighbourhoodSystems.Exercise627.unitPt)))
  (@And.intro
    (And
      (∀
        (D₀ D₁ :
          DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
NeighbourhoodSystems.ExampleB.Str),
        @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
NeighbourhoodSystems.ExampleB.Str
          DomainTheory.NeighbourhoodSystems.ExampleB.Str
          (DomainTheory.NeighbourhoodSystems.Exercise619.otimesTok D₀ D₁)
          (DomainTheory.NeighbourhoodSystems.Exercise619.prodTok D₀ D₁))
      (∀
        {D₀ D₁ :
          DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
NeighbourhoodSystems.ExampleB.Str}
        {h₀ :
          ∀ (X : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory
.NeighbourhoodSystems.ExampleB.Str
              D₀ X →
            @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str X}
        {h₁ :
          ∀ (Y : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory
.NeighbourhoodSystems.ExampleB.Str
              D₁ Y →
            @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str Y},
        @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
NeighbourhoodSystems.ExampleB.Str
          DomainTheory.NeighbourhoodSystems.ExampleB.Str D₀
          (DomainTheory.NeighbourhoodSystems.Exercise619.oplusTok D₀ D₁ h₀ h₁)))
    (∀
      (D₀ D₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
```

```
    NeighbourhoodSystems.ExampleB.Str),
          @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
            DomainTheory.NeighbourhoodSystems.ExampleB.Str D₀
            (DomainTheory.NeighbourhoodSystems.Exercise619.prodTok D₀ D₁))
        (@And.intro
          (∀
            (D₀ D₁ :
              DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
    NeighbourhoodSystems.ExampleB.Str),
            @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
              DomainTheory.NeighbourhoodSystems.ExampleB.Str
              (DomainTheory.NeighbourhoodSystems.Exercise619.otimesTok D₀ D₁)
              (DomainTheory.NeighbourhoodSystems.Exercise619.prodTok D₀ D₁))
          (∀
            {D₀ D₁ :
              DomainTheory.NeighbourhoodSystems.NeighborhoodSystem DomainTheory.
    NeighbourhoodSystems.ExampleB.Str}
            {h₀ :
              ∀ (X : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory
    .NeighbourhoodSystems.ExampleB.Str
                  D₀ X →
                @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str X}
            {h₁ :
              ∀ (Y : Set DomainTheory.NeighbourhoodSystems.ExampleB.Str),
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem DomainTheory
    .NeighbourhoodSystems.ExampleB.Str
                  D₁ Y →
                @Set.Nonempty DomainTheory.NeighbourhoodSystems.ExampleB.Str Y},
            @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
    NeighbourhoodSystems.ExampleB.Str
              DomainTheory.NeighbourhoodSystems.ExampleB.Str D₀
              (DomainTheory.NeighbourhoodSystems.Exercise619.oplusTok D₀ D₁ h₀ h₁))
          DomainTheory.NeighbourhoodSystems.Exercise627.otimes_trianglelefteq_prod
          @DomainTheory.NeighbourhoodSystems.Exercise627.inl_trianglelefteq_oplus)
        DomainTheory.NeighbourhoodSystems.Exercise627.fst_trianglelefteq_prod)
      DomainTheory.NeighbourhoodSystems.Exercise627.not_trianglelefteq_otimes)
    @DomainTheory.NeighbourhoodSystems.Exercise627.oplus_trianglelefteq_sum)
  @DomainTheory.NeighbourhoodSystems.Exercise627.strictFun_trianglelefteq_funSpace
end

end DomainTheory.NeighbourhoodSystems.Exercise627
end

section

universe w

namespace DomainTheory.NeighbourhoodSystems
namespace Theorem614

open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

variable {α : Type w}
```

```
structure Setup where

  T : Endofunctor DomainObj.{w}

  hmaps : ContinuousOnMaps T

  hmono : MonotoneOnDomains T

  hcont : ContinuousOnDomains T
  {Tok : Type w}

  Γ : NeighborhoodSystem Tok

  ceq : (T.obj ⟨Tok, Γ⟩).carrier = Tok

  hsub : Γ ? (ceq ▶ (T.obj ⟨Tok, Γ⟩).sys : NeighborhoodSystem Tok)

end Theorem614
end DomainTheory.NeighbourhoodSystems
end

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise510

section
universe w

namespace Theorem614

variable {α : Type w}

theorem mem_cast {β : Type w} (e : β = α) (V : NeighborhoodSystem β) (X : Set α) :
    (e ▶ V : NeighborhoodSystem α).mem X ↔ V.mem (e.symm ▶ X : Set β) := by
  cases e; rfl

theorem rec_trans {β ? : Type w} (e : β = ?) (e' : ? = α) (x : NeighborhoodSystem β) :
    (e' ▶ (e ▶ x : NeighborhoodSystem ?) : NeighborhoodSystem α) = (e.trans e') ▶ x :=
     by
  cases e; cases e'; rfl

theorem set_rec_trans {β ? : Type w} (e : β = ?) (e' : ? = α) (X : Set β) :
    (e' ▶ (e ▶ X : Set ?) : Set α) = (e.trans e') ▶ X := by
  cases e; cases e'; rfl

theorem subsystem_cast {β : Type w} (e : β = α) {D E : NeighborhoodSystem β} (h : D ?
    E) :
    (e ▶ D : NeighborhoodSystem α) ? (e ▶ E : NeighborhoodSystem α) := by
  cases e; exact h

def iter (s : Setup.{w}) : (n : ℕ) →
    Σ' (S : NeighborhoodSystem s.Tok), Σ' (ceq : (s.T.obj ⟨s.Tok, S⟩).carrier = s.Tok),
      S ? (ceq ▶ (s.T.obj ⟨s.Tok, S⟩).sys : NeighborhoodSystem s.Tok)
  | 0 => ⟨s.Γ, s.ceq, s.hsub⟩
  | (n + 1) =>
```

```
      let p := iter s n
      ⟨p.2.1 ▶ (s.T.obj ⟨s.Tok, p.1⟩).sys,
        (s.hmono p.2.2).carrier_eq.trans p.2.1,
        by
          have hsub := subsystem_cast p.2.1 (s.hmono p.2.2).sub
          rwa [rec_trans] at hsub⟩

def Dsys (s : Setup.{w}) (n : ℕ) : NeighborhoodSystem s.Tok := (iter s n).1

theorem Dceq (s : Setup.{w}) (n : ℕ) : (s.T.obj ⟨s.Tok, Dsys s n⟩).carrier = s.Tok := (
    iter s n).2.1

theorem Dchain (s : Setup.{w}) (n : ℕ) : Dsys s n ? Dsys s (n + 1) := (iter s n).2.2

theorem Dsys_master (s : Setup.{w}) (n : ℕ) : (Dsys s n).master = s.Γ.master := by
  induction n with
  | zero => rfl
  | succ k ih => rw [← (Dchain s k).master_eq]; exact ih

theorem Dsys_succ (s : Setup.{w}) (n : ℕ) :
    Dsys s (n + 1) = (Dceq s n ▶ (s.T.obj ⟨s.Tok, Dsys s n⟩).sys : NeighborhoodSystem s
    .Tok) :=
  rfl

theorem chain_le (s : Setup.{w}) {n m : ℕ} (h : n ≤ m) : Dsys s n ? Dsys s m := by
  induction h with
  | refl => exact Subsystem.refl _
  | step _ ih => exact ih.trans (Dchain s _)

def colim (s : Setup.{w}) : NeighborhoodSystem s.Tok where
  mem X := ∃ n, (Dsys s n).mem X
  master := s.Γ.master
  master_nonempty := s.Γ.master_nonempty
  master_mem := ⟨0, s.Γ.master_mem⟩
  inter_mem := by
    rintro X Y Z ⟨n, hX⟩ ⟨m, hY⟩ ⟨p, hZ⟩ hsub
    set N := max n (max m p) with hN
    have hXN : (Dsys s N).mem X := (chain_le s (le_max_left n _)).sub hX
    have hYN : (Dsys s N).mem Y :=
      (chain_le s ((le_max_left m p).trans (le_max_right n _))).sub hY
    have hZN : (Dsys s N).mem Z :=
      (chain_le s ((le_max_right m p).trans (le_max_right n _))).sub hZ
    exact ⟨N, (Dsys s N).inter_mem hXN hYN hZN hsub⟩
  sub_master := by
    rintro X ⟨n, hX⟩
    rw [← Dsys_master s n]
    exact (Dsys s n).sub_master hX

@[simp] theorem mem_colim (s : Setup.{w}) {X : Set s.Tok} :
    (colim s).mem X ↔ ∃ n, (Dsys s n).mem X := Iff.rfl

@[simp] theorem colim_master (s : Setup.{w}) : (colim s).master = s.Γ.master := rfl

theorem Dsys_sub_colim (s : Setup.{w}) (n : ℕ) : Dsys s n ? colim s where
  master_eq := by rw [colim_master, Dsys_master]
  sub hX := ⟨n, hX⟩
```

```
  inter_closed := by
    rintro X Y hX hY ⟨m, hXY⟩
    have hN : (Dsys s (max n m)).mem (X ∩ Y) := by
      have hle : (Dsys s m) ? (Dsys s (max n m)) := chain_le s (le_max_right n m)
      exact hle.sub hXY

    exact (chain_le s (le_max_left n m)).inter_closed hX hY hN

theorem colimCeq (s : Setup.{w}) : (s.T.obj ⟨s.Tok, colim s⟩).carrier = s.Tok :=
  (s.hmono (Dsys_sub_colim s 0)).carrier_eq.trans (Dceq s 0)

def Tcolim (s : Setup.{w}) : NeighborhoodSystem s.Tok :=
  colimCeq s ▸ (s.T.obj ⟨s.Tok, colim s⟩).sys

theorem Dsys_sub_Tcolim (s : Setup.{w}) (n : ℕ) : Dsys s (n + 1) ? Tcolim s := by
  have h := subsystem_cast (Dceq s n) (s.hmono (Dsys_sub_colim s n)).sub
  rw [rec_trans] at h
  exact h

theorem Tcolim_master (s : Setup.{w}) : (Tcolim s).master = s.Γ.master := by
  rw [← (Dsys_sub_Tcolim s 0).master_eq, Dsys_master]

theorem Tcolim_sub_colim (s : Setup.{w}) {X : Set s.Tok} (hX : (Tcolim s).mem X) :
    (colim s).mem X := by
  obtain ⟨hmono', hC⟩ := s.hcont
  set ? : Set (NeighborhoodSystem s.Tok) := Set.range (Dsys s) with h?def
  have h? : ∀ {{D}}, D ∈ ? → D ? colim s := by rintro D ⟨n, rfl⟩; exact Dsys_sub_colim
    s n
  have hne : ?.Nonempty := ⟨Dsys s 0, ⟨0, rfl⟩⟩
  have hdir : DirectedOn (· ? ·) ? := by
    rintro _ ⟨n, rfl⟩ _ ⟨m, rfl⟩
    exact ⟨Dsys s (max n m), ⟨max n m, rfl⟩,
      chain_le s (le_max_left n m), chain_le s (le_max_right n m)⟩
  have hU : ∀ Y, (colim s).mem Y ↔ ∃ D ∈ ?, D.mem Y := by
    intro Y; constructor
    · rintro ⟨n, hn⟩; exact ⟨Dsys s n, ⟨n, rfl⟩, hn⟩
    · rintro ⟨D, ⟨n, rfl⟩, hn⟩; exact ⟨n, hn⟩
  have heq := hC ? h? hne hdir (Subsystem.refl (colim s)) hU
  set Y₀ : Set (s.T.obj ⟨s.Tok, colim s⟩).carrier := (colimCeq s).symm ▸ X with hY₀

  have hmem : Y₀ ∈ targetFam s.T hmono' (Subsystem.refl (colim s)) :=
    (mem_cast (colimCeq s) _ X).mp hX
  rw [heq, Set.mem_iUnion] at hmem
  obtain ⟨D, hmem⟩ := hmem
  rw [Set.mem_iUnion] at hmem
  obtain ⟨hD, hmemD⟩ := hmem
  obtain ⟨n, rfl⟩ := hD
  simp only [targetFam, Set.mem_ofPred_eq] at hmemD

  refine ⟨n + 1, ?_⟩
  rw [Dsys_succ s n, mem_cast (Dceq s n)]
  have key : ((Dceq s n).symm ▸ X : Set (s.T.obj ⟨s.Tok, Dsys s n⟩).carrier)
      = (s.hmono (h? ⟨n, rfl⟩)).carrier_eq ▸ Y₀ := by
    rw [hY₀, set_rec_trans]
  rw [key]
  exact hmemD
```

```
theorem colim_sub_Tcolim (s : Setup.{w}) {X : Set s.Tok} (hX : (colim s).mem X) :
    (Tcolim s).mem X := by
  obtain ⟨n, hn⟩ := hX
  exact (Dsys_sub_Tcolim s n).sub ((Dchain s n).sub hn)

theorem Tcolim_eq_colim (s : Setup.{w}) : Tcolim s = colim s :=
  NeighborhoodSystem.ext
    (fun _ => ⟨fun h => Tcolim_sub_colim s h, fun h => colim_sub_Tcolim s h⟩)
    (by rw [Tcolim_master, colim_master])

theorem domainObj_ext {c : Type w} (σ : NeighborhoodSystem c) (e : c = α)
    {V : NeighborhoodSystem α} (h : (e ▸ σ : NeighborhoodSystem α) = V) :
    (⟨c, σ⟩ : DomainObj) = ⟨α, V⟩ := by
  cases e; cases h; rfl

theorem colimObj_eq (s : Setup.{w}) :
    s.T.obj ⟨s.Tok, colim s⟩ = (⟨s.Tok, colim s⟩ : DomainObj) :=
  domainObj_ext (s.T.obj ⟨s.Tok, colim s⟩).sys (colimCeq s) (Tcolim_eq_colim s)

def isoOfEq {Obj : Type*} [Category Obj] {X Y : Obj} (h : X = Y) : Iso X Y := by
  cases h
  exact ⟨(? X), (? X), CategoryTheory.Category.id_comp _, CategoryTheory.Category.
    id_comp _⟩

def colimIso (s : Setup.{w}) : Iso (s.T.obj ⟨s.Tok, colim s⟩) (⟨s.Tok, colim s⟩ :
    DomainObj) :=
  isoOfEq (colimObj_eq s)

def rho (s : Setup.{w}) (n : ℕ) : ApproximableMap (colim s) (colim s) :=
  (Dsys_sub_colim s n).inj.comp (Dsys_sub_colim s n).proj

theorem rho_rel (s : Setup.{w}) (n : ℕ) {X Y : Set s.Tok} :
    (rho s n).rel X Y ↔
      (colim s).mem X ∧ (colim s).mem Y ∧ ∃ z, (Dsys s n).mem z ∧ X ⊆ z ∧ z ⊆ Y := by
  unfold rho
  rw [comp_rel]
  constructor
  · rintro ⟨z, ⟨hcX, hDz, hXz⟩, _, hcY, hzY⟩
    exact ⟨hcX, hcY, z, hDz, hXz, hzY⟩
  · rintro ⟨hcX, hcY, z, hDz, hXz, hzY⟩
    exact ⟨z, ⟨hcX, hDz, hXz⟩, hDz, hcY, hzY⟩


theorem rho_mono (s : Setup.{w}) {n m : ℕ} (h : n ≤ m) {X Y : Set s.Tok}
    (hr : (rho s n).rel X Y) : (rho s m).rel X Y := by
  rw [rho_rel] at hr ⊢
  obtain ⟨hcX, hcY, z, hDz, hXz, hzY⟩ := hr
  exact ⟨hcX, hcY, z, (chain_le s h).sub hDz, hXz, hzY⟩

def iSupRho (s : Setup.{w}) : ApproximableMap (colim s) (colim s) :=
  iSupMap (rho s) (fun i j => ⟨max i j,
    fun _ _ h => rho_mono s (le_max_left i j) h,
    fun _ _ h => rho_mono s (le_max_right i j) h⟩)

abbrev colimAlg (s : Setup.{w}) : TAlgebra s.T :=
```

```
  ⟨⟨s.Tok, colim s⟩, (colimIso s).hom⟩

abbrev objColim (s : Setup.{w}) : DomainObj := ⟨s.Tok, colim s⟩

abbrev objDsys (s : Setup.{w}) (n : ℕ) : DomainObj := ⟨s.Tok, Dsys s n⟩

abbrev Tmap_rho (s : Setup.{w}) (n : ℕ) :
    ApproximableMap (s.T.obj (objColim s)).sys (s.T.obj (objColim s)).sys :=
  s.T.map (X := objColim s) (Y := objColim s) (rho s n)

@[simp] theorem Dsys_zero (s : Setup.{w}) : Dsys s 0 = s.Γ := rfl

theorem algHom_ext {Obj : Type*} [Category Obj] {T : Endofunctor Obj} {A B : TAlgebra
    T}
    {g g' : AlgHom A B} (h : g.hom = g'.hom) : g = g' := by
  cases g; cases g'; cases h; rfl

theorem cat_comp_eq {X Y Z : DomainObj} (g : (Y ⟶ Z)) (f : (X ⟶ Y)) :
    g ? f = g.comp f := rfl

theorem iSupRho_eq_id (s : Setup.{w}) : iSupRho s = idMap (colim s) := by
  apply ApproximableMap.ext
  intro X Y
  rw [idMap_rel]
  constructor
  · rintro ⟨n, hr⟩
    rw [rho_rel] at hr
    obtain ⟨hcX, hcY, z, _, hXz, hzY⟩ := hr
    exact ⟨hcX, hcY, hXz.trans hzY⟩
  · rintro ⟨hcX, hcY, hXY⟩
    obtain ⟨n, hX⟩ := hcX
    exact ⟨n, (rho_rel s n).mpr ⟨⟨n, hX⟩, hcY, X, hX, subset_rfl, hXY⟩⟩

theorem isoOfEq_conj {Obj : Type*} [Category Obj] {X Y : Obj} (e : X = Y)
    (f : (X ⟶ X)) :
    (isoOfEq e).hom ? f ? (isoOfEq e).inv = (e ▶ f : (Y ⟶ Y)) := by
  cases e
  change (? X) ? f ? (? X) = f
  dsimp only [compAfter]
  rw [CategoryTheory.Category.comp_id, CategoryTheory.Category.id_comp]

theorem map_comp_proj_heq {Tok : Type w} {Pc Qc : Type w} (cn : Pc = Tok) (cc : Qc =
    Tok)
    {Ps : NeighborhoodSystem Pc} {Qs : NeighborhoodSystem Qc} (ce : Qc = Pc)
    (sub : Ps ? (ce ▶ Qs : NeighborhoodSystem Pc))
    {Dn1 Col : NeighborhoodSystem Tok}
    (hDn1 : (cn ▶ Ps : NeighborhoodSystem Tok) = Dn1)
    (hCol : (cc ▶ Qs : NeighborhoodSystem Tok) = Col)
    (hsub' : Dn1 ? Col)
    (Tmi : ApproximableMap Ps Qs) (Tmj : ApproximableMap Qs Ps)
    (hi : HEq Tmi sub.inj) (hj : HEq Tmj sub.proj) :
    HEq (Tmi.comp Tmj) (hsub'.inj.comp hsub'.proj) := by
  subst cn
  subst cc
  obtain rfl := hDn1
  obtain rfl := hCol
```

```
  have e1 : Tmi = sub.inj := eq_of_heq hi
  have e2 : Tmj = sub.proj := eq_of_heq hj
  rw [e1, e2]

theorem map_rho_heq (s : Setup.{w}) (n : ℕ) :
    HEq (Tmap_rho s n) (rho s (n + 1)) := by
  have hcomp : Tmap_rho s n
      = (s.T.map (X := objDsys s n) (Y := objColim s) (Dsys_sub_colim s n).inj).comp
          (s.T.map (X := objColim s) (Y := objDsys s n) (Dsys_sub_colim s n).proj) :=
    s.T.map_comp (X := objColim s) (Y := objDsys s n) (Z := objColim s)
      (Dsys_sub_colim s n).inj (Dsys_sub_colim s n).proj
  rw [hcomp]
  exact map_comp_proj_heq (Dceq s n) (colimCeq s) (s.hmono (Dsys_sub_colim s n)).
    carrier_eq
    (s.hmono (Dsys_sub_colim s n)).sub (Dsys_succ s n).symm (Tcolim_eq_colim s)
    (Dsys_sub_colim s (n + 1)) (s.T.map (X := objDsys s n) (Y := objColim s) (
    Dsys_sub_colim s n).inj)
    (s.T.map (X := objColim s) (Y := objDsys s n) (Dsys_sub_colim s n).proj)
    (s.hmono (Dsys_sub_colim s n)).inj_heq (s.hmono (Dsys_sub_colim s n)).proj_heq

theorem nonempty_strict_algHom (s : Setup.{w}) (B : TAlgebra s.T) (hk : IsStrict B.str
    ) :
    Nonempty {g : AlgHom (colimAlg s) B // IsStrict g.hom} :=
  nonempty_algHom_of_continuousOnMaps s.T s.hmaps (colimIso s) B hk

theorem nonempty_algHom (s : Setup.{w}) (B : TAlgebra s.T) (hk : IsStrict B.str) :
    Nonempty (AlgHom (colimAlg s) B) :=
  (nonempty_strict_algHom s B hk).map (·.1)

end Theorem614
end
end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 6.27. Which of the following relationships are true:

$$(\mathcal{D} \otimes \mathcal{E}) \trianglelefteq (\mathcal{D} \times \mathcal{E})\,; \quad \mathcal{D} \trianglelefteq \mathcal{D} \times \mathcal{E}\,;$$

$$(\mathcal{D} \oplus \mathcal{E}) \trianglelefteq (\mathcal{D} + \mathcal{E})\,; \quad \mathcal{D} \trianglelefteq \mathcal{D} \oplus \mathcal{E}\,;$$

$$(\mathcal{D} \to_{\perp} \mathcal{E}) \trianglelefteq (\mathcal{D} \to \mathcal{E})\,; \quad \mathcal{D} \trianglelefteq \mathcal{D} \otimes \mathcal{E}\,?$$

3.7.30 Exercise 6.28 — finite embeddings cancel

Exercise_6_28.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_25

@[expose] public section

section
```

```
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
section
variable {α β : Type*} {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}

theorem isomorphic_of_trianglelefteq_both [Finite D.Element] [Finite E.Element]
    (h₁ : D ? E) (h₂ : E ? D) : D ≅? E := by
  obtain ⟨f⟩ := h₁.elementEmbedding
  obtain ⟨g⟩ := h₂.elementEmbedding
  exact orderIso_of_embeddings f g

theorem isomorphic_of_finite_system (hD : D.IsFinite) (hE : E.IsFinite)
    (h₁ : D ? E) (h₂ : E ? D) : D ≅? E := by
  have := finite_element_of_isFinite hD
  have := finite_element_of_isFinite hE
  exact isomorphic_of_trianglelefteq_both h₁ h₂

end

section
set_option linter.unusedVariables false

theorem example_628.{u_1, u_2} : And
  (∀ {α : Type u_1} {β : Type u_2} {D : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
    {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsFinite α D →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsFinite β E →
        @DomainTheory.NeighbourhoodSystems.Trianglelefteq α β D E →
          @DomainTheory.NeighbourhoodSystems.Trianglelefteq β α E D →
            @DomainTheory.NeighbourhoodSystems.Isomorphic α β D E)
  (∀ {α : Type u_1} {β : Type u_2} {D : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
    {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    [Finite (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)]
    [Finite (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β E)],
    @DomainTheory.NeighbourhoodSystems.Trianglelefteq α β D E →
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq β α E D → @DomainTheory.
    NeighbourhoodSystems.Isomorphic α β D E) :=
  @And.intro
  (∀ {α : Type u_1} {β : Type u_2} {D : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
    {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsFinite α D →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsFinite β E →
        @DomainTheory.NeighbourhoodSystems.Trianglelefteq α β D E →
          @DomainTheory.NeighbourhoodSystems.Trianglelefteq β α E D →
            @DomainTheory.NeighbourhoodSystems.Isomorphic α β D E)
  (∀ {α : Type u_1} {β : Type u_2} {D : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
    {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    [Finite (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)]
    [Finite (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β E)],
    @DomainTheory.NeighbourhoodSystems.Trianglelefteq α β D E →
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq β α E D → @DomainTheory.
    NeighbourhoodSystems.Isomorphic α β D E)
```

```
  @DomainTheory.NeighbourhoodSystems.isomorphic_of_finite_system
  @DomainTheory.NeighbourhoodSystems.isomorphic_of_trianglelefteq_both
end

section
variable {α : Type*}

namespace Subsystem

variable {D E : NeighborhoodSystem α}

def projectionPair (h : D ? E) : ProjectionPair D E where
  inj := h.inj
  proj := h.proj
  proj_comp_inj := h.proj_comp_inj
  inj_comp_proj_le := h.inj_comp_proj_le

theorem toElementMap_inj (h : D ? E) (x : D.Element) {Y : Set α} :
    (h.inj.toElementMap x).mem Y ↔ E.mem Y ∧ ∃ X, x.mem X ∧ X ⊆ Y := by
  constructor
  · rintro ⟨X, hX, _, hY, hXY⟩
    exact ⟨hY, X, hX, hXY⟩
  · rintro ⟨hY, X, hX, hXY⟩
    exact ⟨X, hX, x.sub hX, hY, hXY⟩

theorem toElementMap_proj (h : D ? E) (y : E.Element) {X : Set α} :
    (h.proj.toElementMap y).mem X ↔ y.mem X ∧ D.mem X := by
  constructor
  · rintro ⟨Y, hY, hEY, hX, hYX⟩
    exact ⟨y.up_mem hY (h.sub hX) hYX, hX⟩
  · rintro ⟨hX, hDX⟩
    exact ⟨X, hX, y.sub hX, hDX, subset_rfl⟩

end Subsystem
end

section
export CategoryTheory (Category)

open scoped CategoryTheory

universe u

abbrev compAfter {Obj : Type u} [Category.{v} Obj] {X Y Z : Obj} (g : Y ⟶ Z) (f : X
    ⟶ Y) : X ⟶ Z :=
  f ? g
end

section
export CategoryTheory (Category)

open scoped CategoryTheory

scoped infixr:80 " ? " => compAfter
end
```

```
section
export CategoryTheory (Category)
end

end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 6.28. (Suggested by G. Plotkin). Show that if $\mathcal{D}$ and $\mathcal{E}$ are *finite* systems and

$$\mathcal{D} \trianglelefteq \mathcal{E} \trianglelefteq \mathcal{D}\,,$$

then $\mathcal{D} \cong \mathcal{E}$. Need the same be true of infinite systems?

3.7.31 Exercise 6.29 — infinitary sum and product

Generalize $+$ and $\times$ to infinitary operations on domains:

$$\sum_{n=0}^{\infty} D_n \quad \text{and} \quad \prod_{n=0}^{\infty} D_n.$$

Would a similar generalization be possible for $\oplus$ and $\otimes$?

Exercise_6_29.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_19

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem
namespace Exercise629
universe u v
variable {ι : Type u} {α : ι → Type v}
variable {D : ∀ i, NeighborhoodSystem (α i)}

section IndexedProduct
variable [Nonempty ι]
variable (D) in

def iprod : NeighborhoodSystem (Σ i, α i) where
  mem W := ∃ X : ∀ i, Set (α i), (∀ i, (D i).mem (X i)) ∧ FinSupp D X ∧ W = iprodNbhd
    X
  master := iprodNbhd (fun i => (D i).master)
  master_nonempty := by
    cases ?Nonempty ι? with
    | intro i =>
      obtain ⟨a, ha⟩ := (D i).master_nonempty
      exact ⟨⟨i, a⟩, ha⟩
  master_mem := ⟨fun i => (D i).master, fun i => (D i).master_mem, FinSupp.master, rfl⟩
  sub_master := by
    rintro W ⟨X, hX, _, rfl⟩
```

```
    exact iprodNbhd_subset_iff.mpr fun i => (D i).sub_master (hX i)
  inter_mem := by
    rintro W W' Z ⟨X, hX, hXf, rfl⟩ ⟨X', hX', hX'f, rfl⟩ ⟨ZZ, hZZ, _, rfl⟩ hsub
    rw [iprodNbhd_inter] at hsub ⊢
    refine ⟨fun i => X i ∩ X' i, fun i => ?_, hXf.inter hX'f, rfl⟩
    have : ZZ i ⊆ X i ∩ X' i := iprodNbhd_subset_iff.mp hsub i
    exact (D i).inter_mem (hX i) (hX' i) (hZZ i) this

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

def updTuple (D : ∀ i, NeighborhoodSystem (α i)) (i : ι) (U : Set (α i)) : ∀ j, Set (α
    j) :=
  Function.update (fun j => (D j).master) i U

end Iso

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

omit [Nonempty ι] in
@[simp] theorem updTuple_apply_self (i : ι) (U : Set (α i)) : updTuple D i U i = U :=
    by
  simp [updTuple]

end Iso

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

def fromPi (D : ∀ i, NeighborhoodSystem (α i)) (x : ∀ i, (D i).Element) : (iprod D).
    Element where
  mem W := ∃ X : ∀ i, Set (α i), (∀ i, (x i).mem (X i)) ∧ FinSupp D X ∧ W = iprodNbhd
    X
  sub := by rintro W ⟨X, hX, hXf, rfl⟩; exact ⟨X, fun i => (x i).sub (hX i), hXf, rfl⟩
```

```
  master_mem := ⟨fun i => (D i).master, fun i => (x i).master_mem, FinSupp.master, rfl⟩
  inter_mem := by
    rintro W W' ⟨X, hX, hXf, rfl⟩ ⟨X', hX', hX'f, rfl⟩
    exact ⟨fun i => X i ∩ X' i, fun i => (x i).inter_mem (hX i) (hX' i), hXf.inter hX'f
    ,
      iprodNbhd_inter X X'⟩
  up_mem := by
    rintro W W' ⟨X, hX, _, rfl⟩ hW' hsub
    obtain ⟨X', hX'mem, hX'f, rfl⟩ := hW'
    rw [iprodNbhd_subset_iff] at hsub
    exact ⟨X', fun i => (x i).up_mem (hX i) (hX'mem i) (hsub i), hX'f, rfl⟩

end Iso

end IndexedProduct

def injI (i : ι) (X : Set (α i)) : Set (Option (Σ i, α i)) :=
  (fun a => (some ⟨i, a⟩ : Option (Σ i, α i))) '' X

theorem none_not_mem_injI {i : ι} {X : Set (α i)} : (none : Option (Σ i, α i)) ∈ injI
    i X := by
  rintro ⟨a, _, heq⟩; simp at heq

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

def restrictTo (D : ∀ i, NeighborhoodSystem (α i)) (l : List ι) (X : ∀ i, Set (α i)) :
    ∀ j, Set (α j) := fun j => if j ∈ l then X j else (D j).master

end Iso

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

def slice (D : ∀ i, NeighborhoodSystem (α i)) (i : ι) (U : Set (α i)) : Set (Σ i, α i)
     :=
  iprodNbhd (updTuple D i U)

end Iso

end IndexedProduct

section IndexedProduct
```

```
variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

theorem iprod_mem_slice_inv {i : ι} {U : Set (α i)} (h : (iprod D).mem (slice D i U)) :
    (D i).mem U := by
  obtain ⟨X, hX, _, heq⟩ := h
  have hXeq : updTuple D i U = X := iprodNbhd_injective heq
  have hi := hX i
  rwa [← hXeq, updTuple_apply_self] at hi

end Iso

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

omit [Nonempty ι] in
theorem slice_eq (i : ι) (U : Set (α i)) : slice D i U = iprodNbhd (updTuple D i U) :=
    rfl

end Iso

end IndexedProduct

@[simp] theorem some_mem_injI {i : ι} {a : α i} {X : Set (α i)} :
    (some ⟨i, a⟩ : Option (Σ i, α i)) ∈ injI i X ↔ a ∈ X := by
  constructor
  · rintro ⟨b, hb, heq⟩
    simp only [Option.some.injEq, Sigma.mk.injEq, heq_eq_eq, true_and] at heq
    rwa [heq] at hb
  · intro ha; exact ⟨a, ha, rfl⟩

theorem index_of_some_mem_injI {i k : ι} {a : α k} {X : Set (α i)}
    (hmem : (some ⟨k, a⟩ : Option (Σ i, α i)) ∈ injI i X) : k = i := by
  obtain ⟨b, _, heq⟩ := hmem
  simp only [Option.some.injEq] at heq
  exact (congrArg Sigma.fst heq).symm

theorem injI_inter_same (i : ι) (X Y : Set (α i)) : injI i X ∩ injI i Y = injI i (X ∩ Y
    ) := by
  apply Set.ext
  rintro (_ | ⟨k, a⟩)
  · constructor
    · rintro ⟨h, _⟩; exact absurd h none_not_mem_injI
    · intro h; exact absurd h none_not_mem_injI
  · constructor
    · rintro ⟨hx, hy⟩
```

```
      obtain rfl := index_of_some_mem_injI hx
      exact some_mem_injI.mpr ⟨some_mem_injI.mp hx, some_mem_injI.mp hy⟩
    · intro h
      obtain rfl := index_of_some_mem_injI h
      have h' := some_mem_injI.mp h
      exact ⟨some_mem_injI.mpr h'.1, some_mem_injI.mpr h'.2⟩

theorem injI_subset_iff {i : ι} {X Y : Set (α i)} : injI i X ⊆ injI i Y ↔ X ⊆ Y := by
  constructor
  · intro h a ha; exact some_mem_injI.mp (h (some_mem_injI.mpr ha))
  · intro h; rintro w ⟨a, ha, rfl⟩; exact ⟨a, h ha, rfl⟩

def iotimes [Nonempty ι] (D : ∀ i, NeighborhoodSystem (α i)) : NeighborhoodSystem (Σ i,
    α i) where
  mem W := W = iprodNbhd (fun i => (D i).master) ∨
    ∃ X : ∀ i, Set (α i), (∀ i, (D i).mem (X i)) ∧ (∀ i, X i = (D i).master) ∧
      FinSupp D X ∧ W = iprodNbhd X
  master := iprodNbhd (fun i => (D i).master)
  master_nonempty := by
    cases ?Nonempty ι? with
    | intro i =>
      obtain ⟨a, ha⟩ := (D i).master_nonempty
      exact ⟨⟨i, a⟩, ha⟩
  master_mem := Or.inl rfl
  sub_master := by
    rintro W (rfl | ⟨X, hX, _, _, rfl⟩)
    · exact subset_rfl
    · exact iprodNbhd_subset_iff.mpr fun i => (D i).sub_master (hX i)
  inter_mem := by
    rintro W W' Z hW hW' hZ hsub
    rcases hW with rfl | ⟨X, hX, hXne, hXf, rfl⟩
    · have hW'sub : W' ⊆ iprodNbhd (fun i => (D i).master) := by
        rcases hW' with rfl | ⟨X', hX', _, _, rfl⟩
        · exact subset_rfl
        · exact iprodNbhd_subset_iff.mpr fun i => (D i).sub_master (hX' i)
      rw [Set.inter_eq_right.mpr hW'sub]; exact hW'
    · rcases hW' with rfl | ⟨X', hX', hX'ne, hX'f, rfl⟩
      · rw [Set.inter_eq_left.mpr (iprodNbhd_subset_iff.mpr fun i => (D i).sub_master (
    hX i))]
        exact Or.inr ⟨X, hX, hXne, hXf, rfl⟩
      · rw [iprodNbhd_inter] at hsub ⊢
        obtain ⟨ZZ, hZZmem, rfl⟩ : ∃ ZZ, (∀ i, (D i).mem (ZZ i)) ∧ Z = iprodNbhd ZZ :=
    by
          rcases hZ with rfl | ⟨ZZ, hZZ, _, _, rfl⟩
          · exact ⟨fun i => (D i).master, fun i => (D i).master_mem, rfl⟩
          · exact ⟨ZZ, hZZ, rfl⟩
        refine Or.inr ⟨fun i => X i ∩ X' i, fun i => ?_, fun i => ?_, ?_, rfl⟩
        · exact (D i).inter_mem (hX i) (hX' i) (hZZmem i) (iprodNbhd_subset_iff.mp hsub
     i)
        · intro heq
          exact hXne i (Set.Subset.antisymm ((D i).sub_master (hX i))
            (by rw [← heq]; exact Set.inter_subset_left))
        · exact hXf.inter hX'f

def sumMasterI (D : ∀ i, NeighborhoodSystem (α i)) : Set (Option (Σ i, α i)) :=
  insert none ((fun p => (some p : Option (Σ i, α i))) '' iprodNbhd (fun i => (D i).
```

```
    master))

theorem injI_subset_sumMasterI {i : ι} {X : Set (α i)} (hX : (D i).mem X) :
    injI i X ⊆ sumMasterI D := by
  rintro w ⟨a, ha, rfl⟩
  exact Set.mem_insert_iff.mpr (Or.inr ⟨⟨i, a⟩, (D i).sub_master hX ha, rfl⟩)

theorem none_mem_sumMasterI : (none : Option (Σ i, α i)) ∈ sumMasterI D := Set.
    mem_insert _ _

def ioplus (D : ∀ i, NeighborhoodSystem (α i))
    (hne : ∀ i, ∀ X : Set (α i), (D i).mem X → X.Nonempty) :
    NeighborhoodSystem (Option (Σ i, α i)) where
  mem W := W = sumMasterI D ∨ ∃ i, ∃ X : Set (α i), (D i).mem X ∧ X = (D i).master ∧ W
     = injI i X
  master := sumMasterI D
  master_nonempty := ⟨none, none_mem_sumMasterI⟩
  master_mem := Or.inl rfl
  sub_master := by
    rintro W (rfl | ⟨i, X, hX, _, rfl⟩)
    · exact subset_rfl
    · exact injI_subset_sumMasterI hX
  inter_mem := by
    rintro W W' Z hW hW' hZ hsub
    rcases hW with rfl | ⟨i, X, hX, hXne, rfl⟩
    · have hsub' : W' ⊆ sumMasterI D := by
        rcases hW' with rfl | ⟨j, Y, hY, _, rfl⟩
        · exact subset_rfl
        · exact injI_subset_sumMasterI hY
      rw [Set.inter_eq_right.mpr hsub']; exact hW'
    · rcases hW' with rfl | ⟨j, Y, hY, hYne, rfl⟩
      · rw [Set.inter_eq_left.mpr (injI_subset_sumMasterI hX)]
        exact Or.inr ⟨i, X, hX, hXne, rfl⟩
      · rcases hZ with rfl | ⟨k, Wk, hWk, _, rfl⟩
        · exact absurd (hsub none_mem_sumMasterI).1 none_not_mem_injI
        · obtain ⟨w, hw⟩ := hne k Wk hWk
          have hmemZ := hsub (some_mem_injI.mpr hw)
          obtain rfl := index_of_some_mem_injI hmemZ.1
          obtain rfl := index_of_some_mem_injI hmemZ.2
          rw [injI_inter_same] at hsub ⊢
          exact Or.inr ⟨k, X ∩ Y, (D k).inter_mem hX hY hWk (injI_subset_iff.mp hsub),
            fun heq => hXne (Set.Subset.antisymm ((D k).sub_master hX)
              (heq ▶ Set.inter_subset_left)), rfl⟩

def isum (D : ∀ i, NeighborhoodSystem (α i))
    (hne : ∀ i, ∀ X : Set (α i), (D i).mem X → X.Nonempty) :
    NeighborhoodSystem (Option (Σ i, α i)) where
  mem W := W = sumMasterI D ∨ ∃ i, ∃ X : Set (α i), (D i).mem X ∧ W = injI i X
  master := sumMasterI D
  master_nonempty := ⟨none, none_mem_sumMasterI⟩
  master_mem := Or.inl rfl
  sub_master := by
    rintro W (rfl | ⟨i, X, hX, rfl⟩)
    · exact subset_rfl
    · exact injI_subset_sumMasterI hX
  inter_mem := by
```

```
    rintro W W' Z hW hW' hZ hsub
    rcases hW with rfl | ⟨i, X, hX, rfl⟩
    · have hsub' : W' ⊆ sumMasterI D := by
        rcases hW' with rfl | ⟨j, Y, hY, rfl⟩
        · exact subset_rfl
        · exact injI_subset_sumMasterI hY
      rw [Set.inter_eq_right.mpr hsub']; exact hW'
    · rcases hW' with rfl | ⟨j, Y, hY, rfl⟩
      · rw [Set.inter_eq_left.mpr (injI_subset_sumMasterI hX)]
        exact Or.inr ⟨i, X, hX, rfl⟩
      ·
        rcases hZ with rfl | ⟨k, Wk, hWk, rfl⟩
        · exact absurd (hsub none_mem_sumMasterI).1 none_not_mem_injI
        · obtain ⟨w, hw⟩ := hne k Wk hWk
          have hmemZ := hsub (some_mem_injI.mpr hw)
          obtain rfl := index_of_some_mem_injI hmemZ.1
          obtain rfl := index_of_some_mem_injI hmemZ.2
          rw [injI_inter_same] at hsub ⊢
          exact Or.inr ⟨k, X ∩ Y, (D k).inter_mem hX hY hWk (injI_subset_iff.mp hsub),
    rfl⟩

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

omit [Nonempty ι] in
theorem updTuple_apply_ne {i j : ι} (U : Set (α i)) (h : j = i) :
    updTuple D i U j = (D j).master := by
  simp [updTuple, Function.update_of_ne h]

end Iso

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

theorem fromPi_mem_slice (x : ∀ i, (D i).Element) (i : ι) (U : Set (α i)) :
    (fromPi D x).mem (slice D i U) ↔ (x i).mem U := by
  constructor
  · rintro ⟨X, hX, _, heq⟩
    have hXeq : updTuple D i U = X := iprodNbhd_injective heq
    have hi := hX i
    rwa [← hXeq, updTuple_apply_self] at hi
  · intro hU
    refine ⟨updTuple D i U, fun j => ?_, ⟨[i], fun j hj => ?_⟩, rfl⟩
    · by_cases h : j = i
```

```
      · subst h; rw [updTuple_apply_self]; exact hU
      · rw [updTuple_apply_ne U h]; exact (x j).master_mem
    · exact updTuple_apply_ne U fun h => hj (List.mem_singleton.mpr h)

end Iso

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

omit [Nonempty ι] in
theorem iprodNbhd_restrictTo_cons {X : ∀ i, Set (α i)} (hXsub : ∀ i, X i ⊆ (D i).
    master)
    (a : ι) (l : List ι) :
    iprodNbhd (restrictTo D (a :: l) X) = slice D a (X a) ∩ iprodNbhd (restrictTo D l
    X) := by
  rw [slice_eq, iprodNbhd_inter]
  congr 1; funext j
  show (if j ∈ a :: l then X j else (D j).master)
      = updTuple D a (X a) j ∩ (if j ∈ l then X j else (D j).master)
  by_cases hja : j = a
  · subst hja
    rw [updTuple_apply_self]
    by_cases hjl : j ∈ l
    · rw [ite_eq_left List.mem_cons_self, ite_eq_left hjl, Set.inter_self]
    · rw [ite_eq_left List.mem_cons_self, ite_eq_right hjl, Set.inter_eq_left.mpr (
    hXsub j)]
  · rw [updTuple_apply_ne (X a) hja]
    by_cases hjl : j ∈ l
    · rw [ite_eq_left (List.mem_cons_of_mem a hjl), ite_eq_left hjl, Set.inter_eq_right
    .mpr (hXsub j)]
    · rw [ite_eq_right fun h => (List.mem_cons.mp h).elim hja hjl, ite_eq_right hjl,
    Set.inter_self]

end Iso

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

omit [Nonempty ι] in

theorem iprodNbhd_subset_slice {X : ∀ i, Set (α i)} (hX : ∀ i, (D i).mem (X i)) (i : ι)
     :
```

```
    iprodNbhd X ⊆ slice D i (X i) := by

  rw [slice_eq, iprodNbhd_subset_iff]
  intro j
  by_cases h : j = i
  · subst h; rw [updTuple_apply_self]
  · rw [updTuple_apply_ne (X i) h]; exact (D j).sub_master (hX j)

end Iso

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

theorem iprod_mem_slice {i : ι} {U : Set (α i)} (hU : (D i).mem U) :
    (iprod D).mem (slice D i U) := by
  refine ⟨updTuple D i U, fun j => ?_, ⟨[i], fun j hj => ?_⟩, rfl⟩
  · by_cases h : j = i
    · subst h; rw [updTuple_apply_self]; exact hU
    · rw [updTuple_apply_ne U h]; exact (D j).master_mem
  · exact updTuple_apply_ne U fun h => hj (List.mem_singleton.mpr h)

end Iso

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

omit [Nonempty ι] in

theorem slice_inter (i : ι) (U U' : Set (α i)) :
    slice D i U ∩ slice D i U' = slice D i (U ∩ U') := by
  rw [slice_eq, slice_eq, slice_eq, iprodNbhd_inter]
  congr 1; funext j
  by_cases h : j = i
  · subst h; rw [updTuple_apply_self, updTuple_apply_self, updTuple_apply_self]
  · rw [updTuple_apply_ne U h, updTuple_apply_ne U' h, updTuple_apply_ne (U ∩ U') h,
      Set.inter_self]

end Iso

end IndexedProduct

section IndexedProduct
```

```
variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

omit [Nonempty ι] in

theorem slice_subset (i : ι) {U U' : Set (α i)} (hUU' : U ⊆ U') : slice D i U ⊆ slice
    D i U' := by
  rw [slice_eq, slice_eq, iprodNbhd_subset_iff]
  intro j
  by_cases h : j = i
  · subst h; rw [updTuple_apply_self, updTuple_apply_self]; exact hUU'
  · rw [updTuple_apply_ne U h, updTuple_apply_ne U' h]

end Iso

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

def proj (z : (iprod D).Element) (i : ι) : (D i).Element where
  mem U := (D i).mem U ∧ z.mem (slice D i U)
  sub h := h.1
  master_mem := ⟨(D i).master_mem, by
    have : slice D i (D i).master = (iprod D).master := by
      show iprodNbhd (updTuple D i (D i).master) = iprodNbhd (fun j => (D j).master)
      congr 1; funext j
      by_cases h : j = i
      · subst h; rw [updTuple_apply_self]
      · rw [updTuple_apply_ne (D i).master h]
    rw [this]; exact z.master_mem⟩
  inter_mem := by
    rintro U U' ⟨_, hzU⟩ ⟨_, hzU'⟩
    have hz := z.inter_mem hzU hzU'
    rw [slice_inter] at hz
    exact ⟨iprod_mem_slice_inv (z.sub hz), hz⟩
  up_mem := by
    rintro U U' ⟨_, hzU⟩ hU' hUU'
    exact ⟨hU', z.up_mem hzU (iprod_mem_slice hU') (slice_subset i hUU')⟩

end Iso

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]
```

```
section Iso

variable [DecidableEq ι]

theorem proj_fromPi (x : ∀ i, (D i).Element) (i : ι) : proj (fromPi D x) i = x i := by
  apply Element.ext
  intro U
  constructor
  · rintro ⟨_, hz⟩; exact (fromPi_mem_slice x i U).mp hz
  · intro hU; exact ⟨(x i).sub hU, (fromPi_mem_slice x i U).mpr hU⟩

end Iso

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

theorem z_mem_iprodNbhd_restrictTo (z : (iprod D).Element) {X : ∀ i, Set (α i)}
    (hXsub : ∀ i, X i ⊆ (D i).master) (hslice : ∀ i, z.mem (slice D i (X i))) (l :
    List ι) :
    z.mem (iprodNbhd (restrictTo D l X)) := by
  induction l with
  | nil =>
    have : restrictTo D [] X = fun j => (D j).master := by
      funext j; rw [restrictTo]; exact ite_eq_right List.not_mem_nil
    rw [this]; exact z.master_mem
  | cons a l ih =>
    rw [iprodNbhd_restrictTo_cons hXsub a l]
    exact z.inter_mem (hslice a) ih

end Iso

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

theorem z_mem_of_slices (z : (iprod D).Element) {X : ∀ i, Set (α i)}
    (hXmem : ∀ i, (D i).mem (X i)) (hXf : FinSupp D X)
    (hslice : ∀ i, z.mem (slice D i (X i))) : z.mem (iprodNbhd X) := by
  obtain ⟨l, hl⟩ := hXf
  have hsub : ∀ i, X i ⊆ (D i).master := fun i => (D i).sub_master (hXmem i)
  have key := z_mem_iprodNbhd_restrictTo z hsub hslice l
  have heq : restrictTo D l X = X := by
```

```
    funext j
    rw [restrictTo]
    by_cases h : j ∈ l
    · rw [ite_eq_left h]
    · rw [ite_eq_right h]; exact (hl j h).symm
  rwa [heq] at key

end Iso

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

theorem fromPi_toPi (z : (iprod D).Element) : fromPi D (fun i => proj z i) = z := by
  apply Element.ext
  intro W
  constructor
  · rintro ⟨X, hX, hXf, rfl⟩
    exact z_mem_of_slices z (fun i => (hX i).1) hXf (fun i => (hX i).2)
  · intro hW
    obtain ⟨X, hXmem, hXf, rfl⟩ := z.sub hW
    exact ⟨X, fun i => ⟨hXmem i, z.up_mem hW (iprod_mem_slice (hXmem i))
      (iprodNbhd_subset_slice hXmem i)⟩, hXf, rfl⟩

end Iso

end IndexedProduct

section IndexedProduct

variable [Nonempty ι]

section Iso

variable [DecidableEq ι]

def iprodEquiv (D : ∀ i, NeighborhoodSystem (α i)) :
    (iprod D).Element ≃o (∀ i, (D i).Element) where
  toFun z := fun i => proj z i
  invFun x := fromPi D x
  left_inv z := fromPi_toPi z
  right_inv x := funext fun i => proj_fromPi x i
  map_rel_iff' := by
    intro z z'
    constructor
    · intro h W hzW
      obtain ⟨X, hXmem, hXf, rfl⟩ := z.sub hzW
      refine z_mem_of_slices z' hXmem hXf fun i => ?_
      have hzi : (proj z i).mem (X i) :=
        ⟨hXmem i, z.up_mem hzW (iprod_mem_slice (hXmem i)) (iprodNbhd_subset_slice
```

```
    hXmem i)⟩
      exact ((h i) (X i) hzi).2
    · intro h i U hU
      exact ⟨hU.1, h _ hU.2⟩

end Iso

end IndexedProduct

theorem injI_inter_ne {i j : ι} (h : i = j) (X : Set (α i)) (Y : Set (α j)) :
    injI i X ∩ injI j Y = ∅ := by
  apply Set.eq_empty_iff_forall_notMem.mpr
  rintro (_ | ⟨k, a⟩) ⟨hw1, hw2⟩
  · exact none_not_mem_injI hw1
  · exact h ((index_of_some_mem_injI hw1).symm.trans (index_of_some_mem_injI hw2))

theorem injI_nonempty {i : ι} {X : Set (α i)} (hX : X.Nonempty) : (injI i X).Nonempty
    := by
  obtain ⟨a, ha⟩ := hX; exact ⟨some ⟨i, a⟩, some_mem_injI.mpr ha⟩

theorem iotimes_only_master [Infinite ι] (D : ∀ i, NeighborhoodSystem (α i)) :
    ∀ W, (iotimes D).mem W → W = (iotimes D).master := by
  rintro W (rfl | ⟨X, _, hXne, ⟨l, hl⟩, rfl⟩)
  · rfl
  ·

    refine absurd ((List.finite_toSet l).subset (fun i _ => ?_)) Set.infinite_univ
    exact not_not.mp fun hni => hXne i (hl i hni)

theorem iotimes_subsingleton [Infinite ι] (D : ∀ i, NeighborhoodSystem (α i)) :
    Subsingleton (iotimes D).Element := by
  refine ⟨fun x y => ?_⟩
  apply Element.ext
  intro W
  constructor
  · intro hx; rw [iotimes_only_master D W (x.sub hx)]; exact y.master_mem
  · intro hy; rw [iotimes_only_master D W (y.sub hy)]; exact x.master_mem

section IndexedProduct

variable [Nonempty ι]

theorem iprod_mem_iprodNbhd {X : ∀ i, Set (α i)} (hX : ∀ i, (D i).mem (X i))
    (hXf : FinSupp D X) : (iprod D).mem (iprodNbhd X) :=
  ⟨X, hX, hXf, rfl⟩

end IndexedProduct

theorem isum_summand_unique {hne : ∀ i, ∀ X : Set (α i), (D i).mem X → X.Nonempty}
    (z : (isum D hne).Element) {i j : ι} {X : Set (α i)} {Y : Set (α j)}
    (hX : z.mem (injI i X)) (hY : z.mem (injI j Y)) : i = j := by

  have hz := z.inter_mem hX hY
  rcases z.sub hz with h0 | ⟨k, W, hWmem, hWeq⟩
  · rw [Set.ext_iff] at h0
    exact absurd ((h0 none).mpr none_mem_sumMasterI).1 none_not_mem_injI
```

```
  · obtain ⟨w, hw⟩ := hne k W hWmem
    rw [Set.ext_iff] at hWeq
    have hmem := (hWeq (some ⟨k, w⟩)).mpr (some_mem_injI.mpr hw)
    obtain rfl := index_of_some_mem_injI hmem.1
    obtain rfl := index_of_some_mem_injI hmem.2
    rfl

theorem isum_trichotomy {hne : ∀ i, ∀ X : Set (α i), (D i).mem X → X.Nonempty}
    (z : (isum D hne).Element) :
    (∃ i, ∃ X : Set (α i), (D i).mem X ∧ z.mem (injI i X)) ∨
      (∀ W, z.mem W → W = (isum D hne).master) := by
  by_cases h : ∃ i, ∃ X : Set (α i), (D i).mem X ∧ z.mem (injI i X)
  · exact Or.inl h
  · refine Or.inr fun W hW => ?_
    rcases z.sub hW with rfl | ⟨i, X, hX, rfl⟩
    · rfl
    · exact absurd ⟨i, X, hX, hW⟩ h

end Exercise629
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise629
section
set_option linter.unusedVariables false

theorem example_629.{u, v} : And
  (And
    (And
      (∀ {ι : Type u} {α : ι → Type v} [inst : Infinite ι]
        (D : (i : ι) → DomainTheory.NeighbourhoodSystems.NeighborhoodSystem (α i))
        (W : Set (@Sigma ι fun (i : ι) => α i)),
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem (@Sigma ι fun (i : ι)
    => α i)
            (@DomainTheory.NeighbourhoodSystems.Exercise629.iotimes ι α
              (@Nontrivial.to_nonempty ι (@Infinite.instNontrivial ι inst)) D)
            W →
          @Eq (Set (@Sigma ι fun (i : ι) => α i)) W
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.master (@Sigma ι fun
    (i : ι) => α i)
              (@DomainTheory.NeighbourhoodSystems.Exercise629.iotimes ι α
                (@Nontrivial.to_nonempty ι (@Infinite.instNontrivial ι inst)) D)))
      (∀ {ι : Type u} {α : ι → Type v} [inst : Infinite ι]
        (D : (i : ι) → DomainTheory.NeighbourhoodSystems.NeighborhoodSystem (α i)),
        Subsingleton
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (@Sigma ι fun
    (i : ι) => α i)
            (@DomainTheory.NeighbourhoodSystems.Exercise629.iotimes ι α
              (@Nontrivial.to_nonempty ι (@Infinite.instNontrivial ι inst)) D))))
    (∀ {ι : Type u} {α : ι → Type v} {D : (i : ι) → DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem (α i)}
      {hne :
        ∀ (i : ι) (X : Set (α i)),
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem (α i) (D i) X →
    @Set.Nonempty (α i) X}
      (z :
```

```
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (@Sigma ι
   fun (i : ι) => α i))
        (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne))
    {i j : ι} {X : Set (α i)} {Y : Set (α j)},
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem (Option (
  @Sigma ι fun (i : ι) => α i))
        (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne) z
        (@DomainTheory.NeighbourhoodSystems.Exercise629.injI ι α i X) →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem (Option (
  @Sigma ι fun (i : ι) => α i))
          (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne) z
          (@DomainTheory.NeighbourhoodSystems.Exercise629.injI ι α j Y) →
        @Eq ι i j))
(∀ {ι : Type u} {α : ι → Type v} {D : (i : ι) → DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem (α i)}
  {hne :
    ∀ (i : ι) (X : Set (α i)),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem (α i) (D i) X → @Set
  .Nonempty (α i) X}
  (z :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (@Sigma ι
  fun (i : ι) => α i))
      (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne)),
  Or
    (∃ (i : ι) (X : Set (α i)),
      And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem (α i) (D i) X)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem (Option (
  @Sigma ι fun (i : ι) => α i))
          (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne) z
          (@DomainTheory.NeighbourhoodSystems.Exercise629.injI ι α i X)))
    (∀ (W : Set (Option (@Sigma ι fun (i : ι) => α i))),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem (Option (
  @Sigma ι fun (i : ι) => α i))
          (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne) z W →
        @Eq (Set (Option (@Sigma ι fun (i : ι) => α i))) W
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.master (Option (
  @Sigma ι fun (i : ι) => α i))
            (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne)))) :=
@And.intro
(And
  (And
    (∀ {ι : Type u} {α : ι → Type v} [inst : Infinite ι]
      (D : (i : ι) → DomainTheory.NeighbourhoodSystems.NeighborhoodSystem (α i))
      (W : Set (@Sigma ι fun (i : ι) => α i)),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem (@Sigma ι fun (i : ι)
   => α i)
          (@DomainTheory.NeighbourhoodSystems.Exercise629.iotimes ι α
            (@Nontrivial.to_nonempty ι (@Infinite.instNontrivial ι inst)) D)
          W →
        @Eq (Set (@Sigma ι fun (i : ι) => α i)) W
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.master (@Sigma ι fun
   (i : ι) => α i)
            (@DomainTheory.NeighbourhoodSystems.Exercise629.iotimes ι α
              (@Nontrivial.to_nonempty ι (@Infinite.instNontrivial ι inst)) D)))
    (∀ {ι : Type u} {α : ι → Type v} [inst : Infinite ι]
      (D : (i : ι) → DomainTheory.NeighbourhoodSystems.NeighborhoodSystem (α i)),
```

```
     Subsingleton
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (@Sigma ι fun
 (i : ι) => α i)
         (@DomainTheory.NeighbourhoodSystems.Exercise629.iotimes ι α
           (@Nontrivial.to_nonempty ι (@Infinite.instNontrivial ι inst)) D))))
  (∀ {ι : Type u} {α : ι → Type v} {D : (i : ι) → DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem (α i)}
    {hne :
      ∀ (i : ι) (X : Set (α i)),
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem (α i) (D i) X →
 @Set.Nonempty (α i) X}
    (z :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (@Sigma ι
  fun (i : ι) => α i))
        (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne))
    {i j : ι} {X : Set (α i)} {Y : Set (α j)},
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem (Option (
 @Sigma ι fun (i : ι) => α i))
        (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne) z
        (@DomainTheory.NeighbourhoodSystems.Exercise629.injI ι α i X) →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem (Option (
 @Sigma ι fun (i : ι) => α i))
          (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne) z
          (@DomainTheory.NeighbourhoodSystems.Exercise629.injI ι α j Y) →
        @Eq ι i j))
(∀ {ι : Type u} {α : ι → Type v} {D : (i : ι) → DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem (α i)}
  {hne :
    ∀ (i : ι) (X : Set (α i)),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem (α i) (D i) X → @Set
 .Nonempty (α i) X}
  (z :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (@Sigma ι
 fun (i : ι) => α i))
      (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne)),
 Or
    (∃ (i : ι) (X : Set (α i)),
      And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem (α i) (D i) X)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem (Option (
 @Sigma ι fun (i : ι) => α i))


          (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne) z
          (@DomainTheory.NeighbourhoodSystems.Exercise629.injI ι α i X)))
    (∀ (W : Set (Option (@Sigma ι fun (i : ι) => α i))),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem (Option (
 @Sigma ι fun (i : ι) => α i))
          (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne) z W →
        @Eq (Set (Option (@Sigma ι fun (i : ι) => α i))) W
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.master (Option (
 @Sigma ι fun (i : ι) => α i))
            (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne))))
(@And.intro
  (And
    (∀ {ι : Type u} {α : ι → Type v} [inst : Infinite ι]
      (D : (i : ι) → DomainTheory.NeighbourhoodSystems.NeighborhoodSystem (α i))
      (W : Set (@Sigma ι fun (i : ι) => α i)),
```

```
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem (@Sigma ι fun (i : ι)
 => α i)
        (@DomainTheory.NeighbourhoodSystems.Exercise629.iotimes ι α
          (@Nontrivial.to_nonempty ι (@Infinite.instNontrivial ι inst)) D)
        W →
      @Eq (Set (@Sigma ι fun (i : ι) => α i)) W
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.master (@Sigma ι fun
 (i : ι) => α i)
          (@DomainTheory.NeighbourhoodSystems.Exercise629.iotimes ι α
            (@Nontrivial.to_nonempty ι (@Infinite.instNontrivial ι inst)) D)))
  (∀ {ι : Type u} {α : ι → Type v} [inst : Infinite ι]
    (D : (i : ι) → DomainTheory.NeighbourhoodSystems.NeighborhoodSystem (α i)),
    Subsingleton
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (@Sigma ι fun
(i : ι) => α i)
        (@DomainTheory.NeighbourhoodSystems.Exercise629.iotimes ι α
          (@Nontrivial.to_nonempty ι (@Infinite.instNontrivial ι inst)) D))))
(∀ {ι : Type u} {α : ι → Type v} {D : (i : ι) → DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem (α i)}
  {hne :
    ∀ (i : ι) (X : Set (α i)),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem (α i) (D i) X →
@Set.Nonempty (α i) X}
  (z :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Option (@Sigma ι
 fun (i : ι) => α i))
      (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne))
  {i j : ι} {X : Set (α i)} {Y : Set (α j)},
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem (Option (
@Sigma ι fun (i : ι) => α i))
      (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne) z
      (@DomainTheory.NeighbourhoodSystems.Exercise629.injI ι α i X) →
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem (Option (
@Sigma ι fun (i : ι) => α i))
      (@DomainTheory.NeighbourhoodSystems.Exercise629.isum ι α D hne) z
      (@DomainTheory.NeighbourhoodSystems.Exercise629.injI ι α j Y) →
    @Eq ι i j)
(@And.intro
  (∀ {ι : Type u} {α : ι → Type v} [inst : Infinite ι]
    (D : (i : ι) → DomainTheory.NeighbourhoodSystems.NeighborhoodSystem (α i))
    (W : Set (@Sigma ι fun (i : ι) => α i)),
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem (@Sigma ι fun (i : ι)
 => α i)
        (@DomainTheory.NeighbourhoodSystems.Exercise629.iotimes ι α
          (@Nontrivial.to_nonempty ι (@Infinite.instNontrivial ι inst)) D)
        W →
      @Eq (Set (@Sigma ι fun (i : ι) => α i)) W
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.master (@Sigma ι fun
 (i : ι) => α i)
          (@DomainTheory.NeighbourhoodSystems.Exercise629.iotimes ι α
            (@Nontrivial.to_nonempty ι (@Infinite.instNontrivial ι inst)) D)))
  (∀ {ι : Type u} {α : ι → Type v} [inst : Infinite ι]
    (D : (i : ι) → DomainTheory.NeighbourhoodSystems.NeighborhoodSystem (α i)),
    Subsingleton
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (@Sigma ι fun
(i : ι) => α i)
```

```
            (@DomainTheory.NeighbourhoodSystems.Exercise629.iotimes ι α
              (@Nontrivial.to_nonempty ι (@Infinite.instNontrivial ι inst)) D)))
      @DomainTheory.NeighbourhoodSystems.Exercise629.iotimes_only_master
      @DomainTheory.NeighbourhoodSystems.Exercise629.iotimes_subsingleton)
    @DomainTheory.NeighbourhoodSystems.Exercise629.isum_summand_unique)
  @DomainTheory.NeighbourhoodSystems.Exercise629.isum_trichotomy
end

end DomainTheory.NeighbourhoodSystems.Exercise629
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

section
variable {α β : Type*} {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}

def Trianglelefteq (D : NeighborhoodSystem α) (E : NeighborhoodSystem β) : Prop :=
  ∃ D' : NeighborhoodSystem β, D' ? E ∧ (D ≅? D')

@[inherit_doc] infix:50 " ? " => Trianglelefteq

section ProjectionPair

variable (i : ApproximableMap D E) (j : ApproximableMap E D)

def IsGen (X : Set α) (Y : Set β) : Prop := i.rel X Y ∧ j.rel Y X

theorem isGen_exists (hji : j.comp i = idMap D) {X : Set α} (hX : D.mem X) :
    ∃ Y, IsGen i j X Y := by
  have hrel : (j.comp i).rel X X := by rw [hji]; exact ⟨hX, hX, subset_rfl⟩
  obtain ⟨Y, hiXY, hjYX⟩ := hrel
  exact ⟨Y, hiXY, hjYX⟩

theorem isGen_inter {X X' : Set α} {Y Y' : Set β}
    (h : IsGen i j X Y) (h' : IsGen i j X' Y') (hE : E.mem (Y ∩ Y')) :
    IsGen i j (X ∩ X') (Y ∩ Y') := by
  obtain ⟨hiXY, hjYX⟩ := h
  obtain ⟨hiX'Y', hjY'X'⟩ := h'
  have hj1 : j.rel (Y ∩ Y') X :=
    j.mono hjYX Set.inter_subset_left subset_rfl hE (j.rel_cod hjYX)
  have hj2 : j.rel (Y ∩ Y') X' :=
    j.mono hjY'X' Set.inter_subset_right subset_rfl hE (j.rel_cod hjY'X')
  have hjInter : j.rel (Y ∩ Y') (X ∩ X') := j.inter_right hj1 hj2
  have hDXX' : D.mem (X ∩ X') := j.rel_cod hjInter
  have hi1 : i.rel (X ∩ X') Y :=
    i.mono hiXY Set.inter_subset_left subset_rfl hDXX' (i.rel_cod hiXY)
  have hi2 : i.rel (X ∩ X') Y' :=
    i.mono hiX'Y' Set.inter_subset_right subset_rfl hDXX' (i.rel_cod hiX'Y')
  exact ⟨i.inter_right hi1 hi2, hjInter⟩

theorem isGen_master : IsGen i j D.master E.master :=
  ⟨i.master_rel, j.master_rel⟩

def Dprime : NeighborhoodSystem β where
  mem Y := ∃ X, IsGen i j X Y
  master := E.master
  master_nonempty := E.master_nonempty
```

```
  master_mem := ⟨D.master, isGen_master i j⟩
  inter_mem := by
    rintro Y₁ Y₂ Z ⟨X₁, hg₁⟩ ⟨X₂, hg₂⟩ ⟨_, hgz⟩ hZsub
    have hEY₁ : E.mem Y₁ := i.rel_cod hg₁.1
    have hEY₂ : E.mem Y₂ := i.rel_cod hg₂.1
    have hEZ : E.mem Z := i.rel_cod hgz.1
    have hEinter : E.mem (Y₁ ∩ Y₂) := E.inter_mem hEY₁ hEY₂ hEZ hZsub
    exact ⟨X₁ ∩ X₂, isGen_inter i j hg₁ hg₂ hEinter⟩
  sub_master := by
    rintro Y ⟨X, hg⟩
    exact E.sub_master (i.rel_cod hg.1)

theorem isGen_mono (hji : j.comp i = idMap D) {X X' : Set α} {Z W : Set β}
    (h : IsGen i j X Z) (h' : IsGen i j X' W) (hZW : Z ⊆ W) : X ⊆ X' := by
  obtain ⟨hiXZ, _⟩ := h
  obtain ⟨_, hjWX'⟩ := h'
  have hiXW : i.rel X W :=
    i.mono hiXZ subset_rfl hZW (i.rel_dom hiXZ) (j.rel_dom hjWX')
  have hrel : (j.comp i).rel X X' := ⟨W, hiXW, hjWX'⟩
  rw [hji] at hrel
  exact hrel.2.2

theorem isGen_fst_unique (hji : j.comp i = idMap D) {X X' : Set α} {Y : Set β}
    (h : IsGen i j X Y) (h' : IsGen i j X' Y) : X = X' :=
  Set.Subset.antisymm (isGen_mono i j hji h h' subset_rfl)
    (isGen_mono i j hji h' h subset_rfl)

theorem isGen_mono' (hij : i.comp j ≤ idMap E) {X X' : Set α} {Z W : Set β}
    (h : IsGen i j X Z) (h' : IsGen i j X' W) (hXX' : X ⊆ X') : Z ⊆ W := by
  obtain ⟨_, hjZX⟩ := h
  obtain ⟨hiX'W, _⟩ := h'
  have hjZX' : j.rel Z X' :=
    j.mono hjZX subset_rfl hXX' (j.rel_dom hjZX) (i.rel_dom hiX'W)
  have hrel : (i.comp j).rel Z W := ⟨X', hjZX', hiX'W⟩
  exact (hij Z W hrel).2.2

theorem isGen_snd_unique (hij : i.comp j ≤ idMap E) {X : Set α} {Y Y' : Set β}
    (h : IsGen i j X Y) (h' : IsGen i j X Y') : Y = Y' :=
  Set.Subset.antisymm (isGen_mono' i j hij h h' subset_rfl)
    (isGen_mono' i j hij h' h subset_rfl)

@[simp] theorem mem_Dprime {Y : Set β} : (Dprime i j).mem Y ↔ ∃ X, IsGen i j X Y :=
  Iff.rfl

theorem Dprime_subsystem : Dprime i j ? E where
  master_eq := rfl
  sub := by rintro Y ⟨X, hg⟩; exact i.rel_cod hg.1
  inter_closed := by
    rintro Y₁ Y₂ ⟨X₁, hg₁⟩ ⟨X₂, hg₂⟩ hE
    exact ⟨X₁ ∩ X₂, isGen_inter i j hg₁ hg₂ hE⟩

def ofEl (hji : j.comp i = idMap D) (hij : i.comp j ≤ idMap E)
    (y : (Dprime i j).Element) : D.Element where
  mem X := ∃ Y, y.mem Y ∧ IsGen i j X Y
  sub := by rintro X ⟨Y, _, hg⟩; exact i.rel_dom hg.1
  master_mem := ⟨E.master, y.master_mem, isGen_master i j⟩
```

```
  inter_mem := by
    rintro X₁ X₂ ⟨Y₁, hY₁y, hg₁⟩ ⟨Y₂, hY₂y, hg₂⟩
    have hyInter : y.mem (Y₁ ∩ Y₂) := y.inter_mem hY₁y hY₂y
    have hEInter : E.mem (Y₁ ∩ Y₂) := (Dprime_subsystem i j).sub (y.sub hyInter)
    exact ⟨Y₁ ∩ Y₂, hyInter, isGen_inter i j hg₁ hg₂ hEInter⟩
  up_mem := by
    rintro X X' ⟨Y, hYy, hg⟩ hDX' hXX'
    obtain ⟨Y', hg'⟩ := isGen_exists i j hji hDX'
    have hYY' : Y ⊆ Y' := isGen_mono' i j hij hg hg' hXX'
    exact ⟨Y', y.up_mem hYy ⟨X', hg'⟩ hYY', hg'⟩

def toEl (hji : j.comp i = idMap D) (x : D.Element) : (Dprime i j).Element where
  mem Y := ∃ X, x.mem X ∧ IsGen i j X Y
  sub := by rintro Y ⟨X, _, hg⟩; exact ⟨X, hg⟩
  master_mem := ⟨D.master, x.master_mem, isGen_master i j⟩
  inter_mem := by
    rintro Y₁ Y₂ ⟨X₁, hX₁x, hg₁⟩ ⟨X₂, hX₂x, hg₂⟩
    have hxInter : x.mem (X₁ ∩ X₂) := x.inter_mem hX₁x hX₂x
    have hDInter : D.mem (X₁ ∩ X₂) := x.sub hxInter
    have hi1 : i.rel (X₁ ∩ X₂) Y₁ :=
      i.mono hg₁.1 Set.inter_subset_left subset_rfl hDInter (i.rel_cod hg₁.1)
    have hi2 : i.rel (X₁ ∩ X₂) Y₂ :=
      i.mono hg₂.1 Set.inter_subset_right subset_rfl hDInter (i.rel_cod hg₂.1)
    have hEinter : E.mem (Y₁ ∩ Y₂) := i.rel_cod (i.inter_right hi1 hi2)
    exact ⟨X₁ ∩ X₂, hxInter, isGen_inter i j hg₁ hg₂ hEinter⟩
  up_mem := by
    rintro Y Y' ⟨X, hXx, hg⟩ ⟨X', hg'⟩ hYY'
    have hXX' : X ⊆ X' := isGen_mono i j hji hg hg' hYY'
    exact ⟨X', x.up_mem hXx (i.rel_dom hg'.1) hXX', hg'⟩

def dprimeEquiv (hji : j.comp i = idMap D) (hij : i.comp j ≤ idMap E) :
    D.Element ≃o (Dprime i j).Element where
  toFun := toEl i j hji
  invFun := ofEl i j hji hij
  left_inv := by
    intro x
    apply Element.ext
    intro X
    constructor
    · rintro ⟨Y, ⟨X₁, hX₁x, hg₁⟩, hg⟩
      rw [isGen_fst_unique i j hji hg hg₁]; exact hX₁x
    · intro hXx
      obtain ⟨Y, hg⟩ := isGen_exists i j hji (x.sub hXx)
      exact ⟨Y, ⟨X, hXx, hg⟩, hg⟩
  right_inv := by
    intro y
    apply Element.ext
    intro Y
    constructor
    · rintro ⟨X, ⟨Y₁, hY₁y, hg₁⟩, hg⟩
      rw [isGen_snd_unique i j hij hg hg₁]; exact hY₁y
    · intro hYy
      obtain ⟨X, hg⟩ := y.sub hYy
      exact ⟨X, ⟨Y, hYy, hg⟩, hg⟩
  map_rel_iff' := by
    intro x x'
```

```
    constructor
    · intro h X hXx
      obtain ⟨Y, hg⟩ := isGen_exists i j hji (x.sub hXx)
      obtain ⟨X₁, hX₁x', hg₁⟩ := h Y ⟨X, hXx, hg⟩
      rw [isGen_fst_unique i j hji hg hg₁]; exact hX₁x'
    · rintro h Y ⟨X, hXx, hg⟩
      exact ⟨X, h X hXx, hg⟩

end ProjectionPair

end
end DomainTheory.NeighbourhoodSystems
end
```

3.8 Computability in effectively given domains

Dependency diagram. Each box is one item. The arrowhead is on the item that imports. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it is not shown. Blue is a definition, green a proposition, amber an example, red a theorem, and indigo an exercise.

Figure 45: Computability in effectively given domains.

3.8.1 Introduction

LECTURE VII COMPUTABILITY IN EFFECTIVELY GIVEN DOMAINS

For the domain N the strict functions from N into N, the strict maps $f : N \to N$, correspond exactly to the partial functions $g : N \to N$ (as we wrote in 5.6 we had $f = \bar{g}$). For such functions there is a standard theory of computability: g is called computable if it can be defined as a partial recursive function with its "program" written down in a certain standard form. The non-strict maps $h : N \to N$ are all constant, and so are intuitively computable; so we know all about computable maps in $|N \to N|$ in general. The question is: what are the computable maps on (elements of) other domains?

The answer will of course depend on how the domain is presented to us. Even with N, there are continuum many isomorphisms $\pi : N \to N$ of N onto itself, not all of which can be computable. That is, if we permute N and, so to speak, present the integers in a different order, then a well-behaved computable function $f : N \to N$ may well be transformed into a non-computable function,

$$\pi \circ f \circ \pi^{-1} : N \to N.$$

(Hint: Consider the characteristic function e of the even numbers. Take $f = \bar{e}$ and let π be very horrid.) The reason we imagined we knew which were the computable $f : N \to N$ is that N is always thought of in a standard presentation. We must thus define "in general" a concept of an *effectively given domain*, that is to say, one with a sufficiently computable presentation to represent the additional knowledge about the domain.

The main idea will be that the *finite elements* of $|D|$ should be regarded as the ones initially known. Abstractly, to know a finite element is to know how it is *related* to other finite elements.

Of course, this will mean that we will allow at most a countable infinity of finite elements — but this restriction well accords with intuition. To make precise the terminology "related to" it proves most convenient to go back to the neighbourhoods (in any case they are in a one-one correspondence with the finite elements).

3.8.2 Definition 7.1 — computable presentation

Definition_7_1.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_22
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_15

public import Mathlib.Computability.Primrec.Basic

public import Mathlib.Data.Nat.Bitwise

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace Exercise722
open scoped Computability
open Sum Set
section
variable {σ₁ σ₂ : Type}
variable {σ : Type}

theorem consistentB_iff_Ssys (a b : SExpr) (ha : InS (denote a)) (hb : InS (denote b))
     :
    consistentB a b = true ↔ InS (denote a ∩ denote b) := by
  rw [← denote_cap, consistentB_iff]
  exact Iff.symm (Ssys_isPositive (Ssys_mem.mpr ha) (Ssys_mem.mpr hb))
end

end Exercise722
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise722
section
set_option linter.unusedVariables false

theorem example_722_decide : ∀ (a b : DomainTheory.NeighbourhoodSystems.Exercise722.
    SExpr),
  DomainTheory.NeighbourhoodSystems.Exercise722.InS (DomainTheory.NeighbourhoodSystems
    .Exercise722.denote a) →
    DomainTheory.NeighbourhoodSystems.Exercise722.InS (DomainTheory.
    NeighbourhoodSystems.Exercise722.denote b) →
      Iff (@Eq Bool (DomainTheory.NeighbourhoodSystems.Exercise722.consistentB a b)
    Bool.true)
        (DomainTheory.NeighbourhoodSystems.Exercise722.InS
```

```
          (@Inter.inter (Set (List Bool)) (@Set.instInter (List Bool))
            (DomainTheory.NeighbourhoodSystems.Exercise722.denote a)
            (DomainTheory.NeighbourhoodSystems.Exercise722.denote b))) :=
  DomainTheory.NeighbourhoodSystems.Exercise722.consistentB_iff_Ssys
end

end DomainTheory.NeighbourhoodSystems.Exercise722
namespace DomainTheory.NeighbourhoodSystems
namespace Exercise722
open scoped Computability
open Sum Set

section
variable {σ₁ σ₂ : Type}
variable {σ : Type}

theorem denote_eq_empty_iff (e : SExpr) :
    denote e = ∅ ↔ ∀ s ∈ (toNFA e).accept, ∀ x, s ∈ (toNFA e).eval x := by
  rw [Set.eq_empty_iff_forall_notMem]
  constructor
  · intro h s hs x hse
    exact h x (by rw [← toNFA_accepts e]; exact ⟨s, hs, hse⟩)
  · intro h x hx
    rw [← toNFA_accepts e] at hx
    obtain ⟨s, hs, hse⟩ := hx
    exact h s hs x hse

theorem nfa_accepts_nonempty_iff (M : NFA Bool σ) :
    M.accepts.Nonempty ↔ ∃ s ∈ M.accept, ∃ x, s ∈ M.eval x := by
  constructor
  · rintro ⟨x, S, hS, hSe⟩; exact ⟨S, hS, x, hSe⟩
  · rintro ⟨S, hS, x, hSe⟩; exact ⟨x, S, hS, hSe⟩

section ShortWord

variable {σ : Type} [Fintype σ] {M : NFA Bool σ}

theorem nfa_accepts_nonempty_iff_short :
    M.accepts.Nonempty ↔ ∃ w, w ∈ wordsUpTo (Fintype.card σ) ∧ w ∈ M.accepts := by
  constructor
  · intro h
    obtain ⟨w, hwlt, hw⟩ := exists_accepted_word_short h
    refine ⟨w, ?_, hw⟩
    rw [mem_wordsUpTo]
    omega
  · intro ⟨w, _, hw⟩
    exact ⟨w, hw⟩

omit [Fintype σ] in
theorem pathStateAt_last {s t : σ} {x : List Bool} (p : M.Path s t x) :
    pathStateAt p x.length (Nat.le_refl _) = t := by
  induction p with
  | nil s => simp [pathStateAt, pathStateAtAux]
  | cons sMid s' u a xs hstep p' ih =>
    simp [pathStateAt, pathStateAtAux, List.length_cons]
    exact ih
```

```
end ShortWord

end

section

def acceptFin : (e : SExpr) → Finset (autState e)
  | .sigma => Finset.univ
  | .single σ => {(some ⟨σ.length, Nat.lt_succ_self _⟩ : SingleState σ)}
  | .cap a b => (acceptFin a) ×ˢ (acceptFin b)
  | .cat a b => (acceptFin b).image (inr : autState b → autState a ? autState b)
end

section

def startFin : (e : SExpr) → Finset (autState e)
  | .sigma => Finset.univ
  | .single σ => {(some ⟨0, Nat.succ_pos _⟩ : SingleState σ)}
  | .cap a b => (startFin a) ×ˢ (startFin b)
  | .cat a b =>
      if ((startFin a) ∩ (acceptFin a)).Nonempty
      then (startFin a).image (inl : autState a → autState a ? autState b) ∪
        (startFin b).image (inr : autState b → autState a ? autState b)
      else (startFin a).image (inl : autState a → autState a ? autState b)
end

section

def stepFinSingle : (e : SExpr) → autState e → Bool → Finset (autState e)
  | .sigma => fun _ _ => Finset.univ
  | .single σ => fun s c => {(singleDFA σ).step s c}
  | .cap a b => fun s c => (stepFinSingle a s.1 c) ×ˢ (stepFinSingle b s.2 c)
  | .cat a b => fun s c =>
      match s with
      | inl s' =>
          if ((stepFinSingle a s' c) ∩ (acceptFin a)).Nonempty
          then (stepFinSingle a s' c).image (inl : autState a → autState a ? autState
    b) ∪
            (startFin b).image (inr : autState b → autState a ? autState b)
          else (stepFinSingle a s' c).image (inl : autState a → autState a ? autState
    b)
      | inr s' => (stepFinSingle b s' c).image (inr : autState b → autState a ?
    autState b)
end

section

def stepFin (e : SExpr) (S : Finset (autState e)) (c : Bool) : Finset (autState e) :=
  S.biUnion (fun s => stepFinSingle e s c)
end

section

def diffNFA (e1 e2 : SExpr) : NFA Bool (Finset (autState e1) × Finset (autState e2))
    where
```

```
  step S c := {(stepFin e1 S.1 c, stepFin e2 S.2 c)}
  start := {(startFin e1, startFin e2)}
  accept := {S | (S.1 ∩ acceptFin e1).Nonempty ∧ S.2 ∩ acceptFin e2 = ∅}
end

section

def evalFin (e : SExpr) (w : List Bool) : Finset (autState e) :=
  w.foldl (stepFin e) (startFin e)
end

section

def subsetB (e1 e2 : SExpr) : Bool :=
  (wordsUpTo (Fintype.card (Finset (autState e1) × Finset (autState e2)))).all
    (fun w => !matchesB e1 w || matchesB e2 w)
end

section

def interEqB (e1 e2 : SExpr) : Bool := subsetB e1 e2 && subsetB e2 e1
end

section
theorem coe_acceptFin : ∀ e : SExpr, (↑(acceptFin e) : Set (autState e)) = (toNFA e).
    accept
  | .sigma => by
      show (↑(Finset.univ : Finset Unit) : Set Unit) = sigmaDFA.toNFA.accept
      show (↑(Finset.univ : Finset Unit) : Set Unit) = Set.univ
      ext x; cases x; simp
  | .single σ => by
      change (↑({(some ⟨σ.length, Nat.lt_succ_self _⟩ : SingleState σ)} : Finset _) :
    Set _)
        = (singleDFA σ).toNFA.accept
      simp [DFA.toNFA, singleDFA]
  | .cap a b => by
      change (↑((acceptFin a) ×ˢ (acceptFin b)) : Set (autState a × autState b))
        = (NFAinter (toNFA a) (toNFA b)).accept
      rw [Finset.coe_product, coe_acceptFin a, coe_acceptFin b]
      rfl
  | .cat a b => by
      show (↑((acceptFin b).image (inr : autState b → autState a ? autState b)) :
        Set (autState a ? autState b)) = (catEps (toNFA a) (toNFA b)).toNFA.accept
      show (↑((acceptFin b).image (inr : autState b → autState a ? autState b)) :
        Set (autState a ? autState b)) = inr '' (toNFA b).accept
      rw [Finset.coe_image, coe_acceptFin b]
end

section
theorem coe_startFin : ∀ e : SExpr, (↑(startFin e) : Set (autState e)) = (toNFA e).
    start
  | .sigma => by
      show (↑(Finset.univ : Finset Unit) : Set Unit) = sigmaDFA.toNFA.start
      show (↑(Finset.univ : Finset Unit) : Set Unit) = {sigmaDFA.start}
      ext x; cases x; simp
  | .single σ => by
```

```
      show (↑({(some ⟨0, Nat.succ_pos _⟩ : SingleState σ)} : Finset (SingleState σ)) :
    Set _)
        = (singleDFA σ).toNFA.start
      simp [DFA.toNFA, singleDFA]
  | .cap a b => by
      show (↑((startFin a) ×ˢ (startFin b)) : Set (autState a × autState b))
        = (NFAinter (toNFA a) (toNFA b)).start
      rw [Finset.coe_product, coe_startFin a, coe_startFin b]
      rfl
  | .cat a b => by
      show (↑(if ((startFin a) ∩ (acceptFin a)).Nonempty
          then (startFin a).image (inl : autState a → autState a ? autState b) ∪
            (startFin b).image (inr : autState b → autState a ? autState b)
          else (startFin a).image (inl : autState a → autState a ? autState b)) :
          Set (autState a ? autState b)) = (catEps (toNFA a) (toNFA b)).toNFA.start
      show _ = (catEps (toNFA a) (toNFA b)).?Closure (catEps (toNFA a) (toNFA b)).
    start
      rw [catEps_start]
      by_cases hne : ((startFin a) ∩ (acceptFin a)).Nonempty
      · rw [ite_eq_left hne]
        ext x
        rw [catEps_mem_?Closure_iff, ← coe_startFin a, ← coe_acceptFin a, ←
    coe_startFin b]
        simp only [Finset.coe_union, Finset.coe_image, mem_union, mem_image, Finset.
    mem_coe]
        constructor
        · rintro (⟨q, hq, rfl⟩ | ⟨q, hq, rfl⟩)
          · exact Or.inl ⟨q, hq, rfl⟩
          · refine Or.inr ⟨?_, q, hq, rfl⟩
            obtain ⟨q0, hq0⟩ := hne
            rw [Finset.mem_inter] at hq0
            exact ⟨q0, hq0.2, q0, hq0.1, rfl⟩
        · rintro (⟨q, hq, rfl⟩ | ⟨_, q, hq, rfl⟩)
          · exact Or.inl ⟨q, hq, rfl⟩
          · exact Or.inr ⟨q, hq, rfl⟩
      · rw [ite_eq_right hne]
        ext x
        rw [catEps_mem_?Closure_iff, ← coe_startFin a, ← coe_acceptFin a, ←
    coe_startFin b]
        simp only [Finset.coe_image, mem_image, Finset.mem_coe]
        constructor
        · rintro ⟨q, hq, rfl⟩; exact Or.inl ⟨q, hq, rfl⟩
        · rintro (⟨q, hq, rfl⟩ | ⟨⟨q, hq1, q', hq2, heq⟩, _⟩)
          · exact ⟨q, hq, rfl⟩
          · cases heq
            exact absurd ⟨q, Finset.mem_inter.mpr ⟨hq2, hq1⟩⟩ hne
end

section
theorem coe_stepFinSingle : ∀ (e : SExpr) (s : autState e) (c : Bool),
    (↑(stepFinSingle e s c) : Set (autState e)) = (toNFA e).step s c
  | .sigma, s, c => by
      show (↑(Finset.univ : Finset Unit) : Set Unit) = sigmaDFA.toNFA.step s c
      show (↑(Finset.univ : Finset Unit) : Set Unit) = {sigmaDFA.step s c}
      ext x; cases x; simp
  | .single σ, s, c => by
```

```
    show (↑({(singleDFA σ).step s c} : Finset (SingleState σ)) : Set _)
      = (singleDFA σ).toNFA.step s c
    simp [DFA.toNFA]
| .cap a b, (s1, s2), c => by
    show (↑((stepFinSingle a s1 c) ×ˢ (stepFinSingle b s2 c)) : Set (autState a ×
 autState b))
      = (NFAinter (toNFA a) (toNFA b)).step (s1, s2) c
    rw [Finset.coe_product, coe_stepFinSingle a s1 c, coe_stepFinSingle b s2 c]
    rfl
| .cat a b, inl s, c => by
    show (↑(if ((stepFinSingle a s c) ∩ (acceptFin a)).Nonempty
        then (stepFinSingle a s c).image (inl : autState a → autState a ? autState b
 ) ∪
          (startFin b).image (inr : autState b → autState a ? autState b)
        else (stepFinSingle a s c).image (inl : autState a → autState a ? autState b
 )) :
        Set (autState a ? autState b)) = (catEps (toNFA a) (toNFA b)).toNFA.step (
 inl s) c
    show _ = (catEps (toNFA a) (toNFA b)).?Closure
      ((catEps (toNFA a) (toNFA b)).step (inl s) (some c))
    rw [catEps_step_inl_some]
    by_cases hne : ((stepFinSingle a s c) ∩ (acceptFin a)).Nonempty
    · rw [ite_eq_left hne]
      ext x
      rw [catEps_mem_?Closure_iff, ← coe_stepFinSingle a s c, ← coe_acceptFin a,
        ← coe_startFin b]
      simp only [Finset.coe_union, Finset.coe_image, mem_union, mem_image, Finset.
 mem_coe]
      constructor
      · rintro (⟨q, hq, rfl⟩ | ⟨q, hq, rfl⟩)
        · exact Or.inl ⟨q, hq, rfl⟩
        · refine Or.inr ⟨?_, q, hq, rfl⟩
          obtain ⟨q0, hq0⟩ := hne
          rw [Finset.mem_inter] at hq0
          exact ⟨q0, hq0.2, q0, hq0.1, rfl⟩
      · rintro (⟨q, hq, rfl⟩ | ⟨_, q, hq, rfl⟩)
        · exact Or.inl ⟨q, hq, rfl⟩
        · exact Or.inr ⟨q, hq, rfl⟩
    · rw [ite_eq_right hne]
      ext x
      rw [catEps_mem_?Closure_iff, ← coe_stepFinSingle a s c, ← coe_acceptFin a,
        ← coe_startFin b]
      simp only [Finset.coe_image, mem_image, Finset.mem_coe]
      constructor
      · rintro ⟨q, hq, rfl⟩; exact Or.inl ⟨q, hq, rfl⟩
      · rintro (⟨q, hq, rfl⟩ | ⟨⟨q, hq1, q', hq2, heq⟩, _⟩)
        · exact ⟨q, hq, rfl⟩
        · cases heq
          exact absurd ⟨q, Finset.mem_inter.mpr ⟨hq2, hq1⟩⟩ hne
| .cat a b, inr s, c => by
    show (↑((stepFinSingle b s c).image (inr : autState b → autState a ? autState b)
 ) :
      Set (autState a ? autState b)) = (catEps (toNFA a) (toNFA b)).toNFA.step (inr
 s) c
    show _ = (catEps (toNFA a) (toNFA b)).?Closure
      ((catEps (toNFA a) (toNFA b)).step (inr s) (some c))
```

```
      rw [catEps_step_inr_some]
      ext x
      rw [catEps_mem_?Closure_iff, ← coe_stepFinSingle b s c]
      simp only [Finset.coe_image, mem_image, Finset.mem_coe]
      constructor
      · rintro ⟨q, hq, rfl⟩; exact Or.inl ⟨q, hq, rfl⟩
      · rintro (⟨q, hq, rfl⟩ | ⟨⟨q, _, hqmem⟩, _⟩)
        · exact ⟨q, hq, rfl⟩
        · exact absurd hqmem (by simp)
end

section
theorem coe_stepFin (e : SExpr) (S : Finset (autState e)) (c : Bool) :
    (↑(stepFin e S c) : Set (autState e)) = (toNFA e).stepSet ↑S c := by
  ext x
  rw [Finset.mem_coe]
  unfold stepFin
  rw [Finset.mem_biUnion, NFA.mem_stepSet]
  constructor
  · rintro ⟨s, hs, hx⟩
    exact ⟨s, hs, by rw [← coe_stepFinSingle e s c]; exact Finset.mem_coe.mpr hx⟩
  · rintro ⟨s, hs, hx⟩
    exact ⟨s, hs, by rw [← coe_stepFinSingle e s c] at hx; exact Finset.mem_coe.mp hx⟩
end

section
theorem coe_foldl_stepFin (e : SExpr) (w : List Bool) (S : Finset (autState e)) :
    (↑(w.foldl (stepFin e) S) : Set (autState e)) = (toNFA e).evalFrom ↑S w := by
  induction w generalizing S with
  | nil => rfl
  | cons c w ih =>
    show (↑(w.foldl (stepFin e) (stepFin e S c)) : Set (autState e)) = _
    rw [ih (stepFin e S c), NFA.evalFrom_cons, coe_stepFin e S c]
end

section
theorem coe_evalFin (e : SExpr) (w : List Bool) :
    (↑(evalFin e w) : Set (autState e)) = (toNFA e).eval w := by
  show (↑(w.foldl (stepFin e) (startFin e)) : Set (autState e))
    = (toNFA e).evalFrom (toNFA e).start w
  rw [coe_foldl_stepFin e w (startFin e), coe_startFin e]
end

section

theorem denote_iff_evalFin (e : SExpr) (w : List Bool) :
    w ∈ denote e ↔ (evalFin e w ∩ acceptFin e).Nonempty := by
  rw [← toNFA_accepts e]
  constructor
  · rintro ⟨s, hs, hse⟩
    refine ⟨s, Finset.mem_inter.mpr ⟨?_, ?_⟩⟩
    · rw [← Finset.mem_coe, coe_evalFin]; exact hse
    · rw [← Finset.mem_coe, coe_acceptFin]; exact hs
  · rintro ⟨s, hs⟩
    rw [Finset.mem_inter] at hs
    obtain ⟨hs1, hs2⟩ := hs
```

```
    refine ⟨s, ?_, ?_⟩
    · rw [← Finset.mem_coe, coe_acceptFin] at hs2; exact hs2
    · rw [← Finset.mem_coe, coe_evalFin] at hs1; exact hs1
end

section
theorem diffNFA_evalFrom (e1 e2 : SExpr) (w : List Bool)
    (S1 : Finset (autState e1)) (S2 : Finset (autState e2)) :
    (diffNFA e1 e2).evalFrom {(S1, S2)} w =
      {(w.foldl (stepFin e1) S1, w.foldl (stepFin e2) S2)} := by
  induction w generalizing S1 S2 with
  | nil => rfl
  | cons c w ih =>
    show (diffNFA e1 e2).evalFrom ((diffNFA e1 e2).stepSet {(S1, S2)} c) w = _
    rw [NFA.stepSet_singleton]
    show (diffNFA e1 e2).evalFrom {(stepFin e1 S1 c, stepFin e2 S2 c)} w = _
    exact ih (stepFin e1 S1 c) (stepFin e2 S2 c)
end

section
theorem diffNFA_eval (e1 e2 : SExpr) (w : List Bool) :
    (diffNFA e1 e2).eval w = {(evalFin e1 w, evalFin e2 w)} := by
  show (diffNFA e1 e2).evalFrom (diffNFA e1 e2).start w = _
  show (diffNFA e1 e2).evalFrom {(startFin e1, startFin e2)} w = _
  exact diffNFA_evalFrom e1 e2 w (startFin e1) (startFin e2)
end

section

theorem diffNFA_mem_accepts_iff (e1 e2 : SExpr) (w : List Bool) :
    w ∈ (diffNFA e1 e2).accepts ↔ w ∈ denote e1 ∧ w ∈ denote e2 := by
  constructor
  · rintro ⟨s, hs, hse⟩
    rw [diffNFA_eval, Set.mem_singleton_iff] at hse
    subst hse
    obtain ⟨hacc1, hacc2⟩ := hs
    refine ⟨(denote_iff_evalFin e1 w).mpr hacc1, fun hmem => ?_⟩
    rw [denote_iff_evalFin] at hmem
    rw [hacc2] at hmem
    exact Finset.not_nonempty_empty hmem
  · rintro ⟨h1, h2⟩
    refine ⟨(evalFin e1 w, evalFin e2 w), ⟨(denote_iff_evalFin e1 w).mp h1, ?_⟩, ?_⟩
    · show evalFin e2 w ∩ acceptFin e2 = ∅
      by_contra hcontra
      exact h2 ((denote_iff_evalFin e2 w).mpr (Finset.nonempty_iff_ne_empty.mpr
    hcontra))
    · rw [diffNFA_eval]; rfl

end

section

theorem exists_diff_word_short {e1 e2 : SExpr} (h : ¬ denote e1 ⊆ denote e2) :
    ∃ w, w.length < Fintype.card (Finset (autState e1) × Finset (autState e2)) ∧
      w ∈ denote e1 ∧ w ∈ denote e2 := by
  rw [Set.not_subset] at h
```

```
  have hne : (diffNFA e1 e2).accepts.Nonempty := by
    obtain ⟨x, hx1, hx2⟩ := h
    exact ⟨x, (diffNFA_mem_accepts_iff e1 e2 x).mpr ⟨hx1, hx2⟩⟩
  obtain ⟨w, hlen, hmem⟩ := exists_accepted_word_short hne
  exact ⟨w, hlen, (diffNFA_mem_accepts_iff e1 e2 w).mp hmem⟩
end

section
theorem subsetB_iff (e1 e2 : SExpr) : subsetB e1 e2 = true ↔ denote e1 ⊆ denote e2 :=
     by
  unfold subsetB
  rw [List.all_eq_true]
  constructor
  · intro h
    by_contra hsub
    obtain ⟨w, hlen, hw1, hw2⟩ := exists_diff_word_short hsub
    have hwmem : w ∈ wordsUpTo (Fintype.card (Finset (autState e1) × Finset (autState
    e2))) :=
      (mem_wordsUpTo _).mpr (le_of_lt hlen)
    have hor := h w hwmem
    have he1 : matchesB e1 w = true := (matchesB_iff e1 w).mpr hw1
    rw [he1] at hor
    simp only [Bool.not_true, Bool.false_or] at hor
    exact hw2 ((matchesB_iff e2 w).mp hor)
  · intro hsub w _
    by_cases hw1 : w ∈ denote e1
    · have he2 : matchesB e2 w = true := (matchesB_iff e2 w).mpr (hsub hw1)
      simp [he2]
    · have he1 : matchesB e1 w = false := by
        rw [Bool.eq_false_iff]
        intro hc
        exact hw1 ((matchesB_iff e1 w).mp hc)
      simp [he1]
end

section
theorem interEqB_iff (e1 e2 : SExpr) : interEqB e1 e2 = true ↔ denote e1 = denote e2
    := by
  unfold interEqB
  rw [Bool.and_eq_true, subsetB_iff, subsetB_iff, ← Set.Subset.antisymm_iff]
end

end Exercise722
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise722
section
set_option linter.unusedVariables false

theorem example_722_equiv : ∀ (e1 e2 : DomainTheory.NeighbourhoodSystems.Exercise722.
    SExpr),
  Iff (@Eq Bool (DomainTheory.NeighbourhoodSystems.Exercise722.interEqB e1 e2) Bool.
    true)
    (@Eq (Set (List Bool)) (DomainTheory.NeighbourhoodSystems.Exercise722.denote e1)
      (DomainTheory.NeighbourhoodSystems.Exercise722.denote e2)) :=
  DomainTheory.NeighbourhoodSystems.Exercise722.interEqB_iff
end
```

```
end DomainTheory.NeighbourhoodSystems.Exercise722
namespace Domain.Recursive
open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

section

theorem amGM : ∀ {a b : ℕ}, 4 * a * b ≤ (a + b) * (a + b)
  | 0, _ => by rw [Nat.mul_zero, Nat.zero_mul]; exact Nat.zero_le _
  | _, 0 => by rw [Nat.mul_zero]; exact Nat.zero_le _
  | a + 1, b + 1 => by
    simpa only [Nat.mul_add, Nat.add_mul, show (4 : ℕ) = 1 + 1 + 1 + 1 from rfl, Nat.
    one_mul,
      Nat.mul_one, Nat.add_assoc, Nat.add_left_comm, Nat.add_le_add_iff_left]
      using Nat.add_le_add_right (@amGM a b) 4
end

section

theorem iter_sq_le (n guess : ℕ) : Nat.sqrt.iter n guess * Nat.sqrt.iter n guess ≤ n
    := by
  unfold Nat.sqrt.iter
  if h : (guess + n / guess) / 2 < guess then
    rw [dite_eq_left h]
    exact iter_sq_le n ((guess + n / guess) / 2)
  else
    rw [dite_eq_right h]
    apply Nat.mul_le_of_le_div
    omega
  termination_by guess
  decreasing_by exact h
end

section

theorem lt_of_mul_lt_mul_left' {a b c : ℕ} (h : a * b < a * c) : b < c := by
  rcases Nat.lt_or_ge b c with hbc | hbc
  · exact hbc
  · exact absurd h (Nat.not_lt.mpr (Nat.mul_le_mul_left a hbc))
end

section

theorem lt_iter_succ_sq (n guess : ℕ) (hn : n < (guess + 1) * (guess + 1)) :
    n < (Nat.sqrt.iter n guess + 1) * (Nat.sqrt.iter n guess + 1) := by
  unfold Nat.sqrt.iter
  if h : (guess + n / guess) / 2 < guess then
    rw [dite_eq_left h]
    suffices hsuff : n < ((guess + n / guess) / 2 + 1) * ((guess + n / guess) / 2 + 1)
     from
      lt_iter_succ_sq n ((guess + n / guess) / 2) hsuff
    refine lt_of_mul_lt_mul_left' (a := 4 * (guess * guess)) ?_
    apply Nat.lt_of_le_of_lt amGM
    rw [show (4 : ℕ) = 2 * 2 from rfl]
    rw [Nat.mul_mul_mul_comm 2, Nat.mul_mul_mul_comm (2 * guess)]
```

```
    refine Nat.mul_self_lt_mul_self (?_ : _ < _ * ((_ / 2) + 1))
    rw [← Nat.add_div_right _ (by decide), Nat.mul_comm 2, Nat.mul_assoc,
      show guess + n / guess + 2 = (guess + n / guess + 1) + 1 from rfl]
    have aux : (guess + n / guess + 1) ≤ 2 * ((guess + n / guess + 1 + 1) / 2) := by
    omega
    refine lt_of_lt_of_le ?_ (Nat.mul_le_mul_left _ aux)
    rw [Nat.add_assoc, Nat.mul_add]
    exact Nat.add_lt_add_left
      (Nat.lt_mul_div_succ _ (lt_of_le_of_lt (Nat.zero_le _) h)) _
  else
    rw [dite_eq_right h]
    exact hn
  termination_by guess
  decreasing_by exact h
end

section

theorem lt_succ_sqrt (n : ℕ) : n < (Nat.sqrt n + 1) * (Nat.sqrt n + 1) := by
  rcases Nat.lt_or_ge 1 n with h | h
  · rw [Nat.sqrt, ite_eq_right (Nat.not_le.mpr h)]
    refine lt_iter_succ_sq _ _ ?_
    set g := 1 <<< (n.log2 / 2 + 1) with hg
    have hshift : g = 2 ^ (n.log2 / 2 + 1) := by rw [hg, Nat.shiftLeft_eq, Nat.one_mul
    ]
    have hgg : g * g = 2 ^ (2 * (n.log2 / 2 + 1)) := by
      rw [hshift, ← pow_add]; congr 1; omega
    calc n < 2 ^ (n.log2 + 1) := Nat.lt_log2_self
      _ ≤ 2 ^ (2 * (n.log2 / 2 + 1)) := Nat.pow_le_pow_right (by decide) (by omega)
      _ = g * g := hgg.symm
      _ ≤ (g + 1) * (g + 1) := Nat.mul_le_mul (Nat.le_succ g) (Nat.le_succ g)
  · rw [Nat.sqrt, ite_eq_left h]
    exact Nat.lt_of_lt_of_le (Nat.lt_succ_self n)
      (Nat.le_mul_of_pos_right (n + 1) (Nat.succ_pos n))
end

section

theorem sqrt_le (n : ℕ) : Nat.sqrt n * Nat.sqrt n ≤ n := by
  rcases Nat.lt_or_ge 1 n with h | h
  · rw [Nat.sqrt, ite_eq_right (Nat.not_le.mpr h)]
    exact iter_sq_le _ _
  · rw [Nat.sqrt, ite_eq_left h]
    calc n * n ≤ 1 * n := Nat.mul_le_mul_right n h
      _ = n := Nat.one_mul n
end

section

theorem sqrt_eq_of {m q : ℕ} (h1 : q * q ≤ m) (h2 : m < (q + 1) * (q + 1)) : Nat.sqrt
    m = q := by
  have hle := sqrt_le m
  have hlt := lt_succ_sqrt m
  have hq_le : q ≤ Nat.sqrt m := by
    rcases Nat.lt_or_ge (Nat.sqrt m) q with hh | hh
    · exfalso
```

```
      have ha : Nat.sqrt m + 1 ≤ q := hh
      have hmul : (Nat.sqrt m + 1) * (Nat.sqrt m + 1) ≤ q * q := Nat.mul_le_mul ha ha
      omega
    · exact hh
  have hle_q : Nat.sqrt m ≤ q := by
    rcases Nat.lt_or_ge q (Nat.sqrt m) with hh | hh
    · exfalso
      have ha : q + 1 ≤ Nat.sqrt m := hh
      have hmul : (q + 1) * (q + 1) ≤ Nat.sqrt m * Nat.sqrt m := Nat.mul_le_mul ha ha
      omega
    · exact hh
  omega
end

section

theorem sqrt_add_eq (q a : ℕ) (h : a ≤ q + q) : Nat.sqrt (q * q + a) = q := by
  refine sqrt_eq_of (Nat.le_add_right _ _) ?_
  have expand : (q + 1) * (q + 1) = q * q + q + q + 1 := Nat.succ_mul_succ q q
  omega
end

section

theorem unpair_pair (a b : ℕ) : Nat.unpair (Nat.pair a b) = (a, b) := by
  rw [Nat.pair]
  if h : a < b then
    rw [ite_eq_left h]
    show Nat.unpair (b * b + a) = (a, b)
    have be : Nat.sqrt (b * b + a) = b := sqrt_add_eq b a (by omega)
    simp only [Nat.unpair, be, Nat.add_sub_cancel_left, ite_eq_left h]
  else
    rw [ite_eq_right h]
    show Nat.unpair (a * a + a + b) = (a, b)
    have ae : Nat.sqrt (a * a + a + b) = a := by
      have e : a * a + a + b = a * a + (a + b) := by omega
      rw [e]; exact sqrt_add_eq a (a + b) (by omega)
    have e1 : a * a + a + b - a * a = a + b := by omega
    have e2 : ¬ a + b < a := by omega
    have e3 : a + b - a = b := by omega
    simp only [Nat.unpair, ae, e1, ite_eq_right e2, e3]
end

section
@[simp] theorem unpair_pair_fst (a b : ℕ) : (Nat.pair a b).unpair.1 = a := by rw [
    unpair_pair]
end

section
@[simp] theorem unpair_pair_snd (a b : ℕ) : (Nat.pair a b).unpair.2 = b := by rw [
    unpair_pair]
end

section

def selectFn (c a b : ℕ) : ℕ := c * a + (1 - c) * b
```

```
end

section
@[simp] theorem selectFn_one (a b : ℕ) : selectFn 1 a b = a := by simp [selectFn]
end

section
@[simp] theorem selectFn_zero (a b : ℕ) : selectFn 0 a b = b := by simp [selectFn]
end

section
@[simp] theorem selectFn_ite {c : Prop} [Decidable c] (a b : ℕ) :
    selectFn (if c then 1 else 0) a b = if c then a else b := by
  split <;> simp [selectFn]
end

section

def RecDecidable (p : ℕ → Prop) : Prop :=
  ∃ f : ℕ → ℕ, Nat.Primrec f ∧ ∀ n, p n ↔ f n = 1
end

section

def REPred (p : ℕ → Prop) : Prop :=
  ∃ q : ℕ → Prop, RecDecidable q ∧ ∀ n, p n ↔ ∃ i, q (Nat.pair i n)
end

section

def REPred₂ (r : ℕ → ℕ → Prop) : Prop :=
  REPred fun t => r t.unpair.1 t.unpair.2
end

section

def RecDecidable₂ (r : ℕ → ℕ → Prop) : Prop :=
  RecDecidable fun t => r t.unpair.1 t.unpair.2
end

section

def RecDecidable₃ (r : ℕ → ℕ → ℕ → Prop) : Prop :=
  RecDecidable fun t => r t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair.2
end

section

def encodeList : List ℕ → ℕ
  | [] => 0
  | a :: l => Nat.pair a (encodeList l) + 1
end

section

def foldStep (stp : ℕ → ℕ) (params s : ℕ) : ℕ :=
```

```
  selectFn (1 - s.unpair.1) s
    (Nat.pair (s.unpair.1 - 1).unpair.2
      (stp (Nat.pair (s.unpair.1 - 1).unpair.1 (Nat.pair s.unpair.2 params))))
end

section

def foldCode (stp : ℕ → ℕ) (params z c : ℕ) : ℕ :=
  ((foldStep stp params)^[c] (Nat.pair c z)).unpair.2
end

section

def halfParity (n : ℕ) : ℕ :=
  Nat.rec (motive := fun _ => ℕ) 0
    (fun _ ih => Nat.pair (ih.unpair.1 + ih.unpair.2) (1 - ih.unpair.2)) n
end

section

def isOne (v : ℕ) : ℕ := 1 - ((v - 1) + (1 - v))
end

section
theorem isOne_eq_one_iff (v : ℕ) : isOne v = 1 ↔ v = 1 := by
  unfold isOne; constructor <;> (intro h; omega)
end

section
@[simp] theorem isOne_one : isOne 1 = 1 := (isOne_eq_one_iff 1).2 rfl
end

section
@[simp] theorem isOne_zero : isOne 0 = 0 := by unfold isOne; omega
end

section

def allListStp (g : ℕ → ℕ) (w : ℕ) : ℕ :=
  selectFn w.unpair.2.unpair.1 (isOne (g (Nat.pair w.unpair.1 w.unpair.2.unpair.2))) 0
end

section

def allListChar (g : ℕ → ℕ) (p c : ℕ) : ℕ := foldCode (allListStp g) p 1 c
end

section

def bExistsFn (g : ℕ → ℕ) (n N : ℕ) : ℕ :=
  Nat.rec (motive := fun _ => ℕ) 0 (fun i ih => selectFn ih 1 (isOne (g (Nat.pair i n)
    ))) N
end

section
```

```
def bForallFn (g : ℕ → ℕ) (n N : ℕ) : ℕ :=
  Nat.rec (motive := fun _ => ℕ) 1 (fun i ih => selectFn ih (isOne (g (Nat.pair i n)))
     0) N
end

section

def existsListStp (g : ℕ → ℕ) (w : ℕ) : ℕ :=
  selectFn w.unpair.2.unpair.1 1 (isOne (g (Nat.pair w.unpair.1 w.unpair.2.unpair.2)))
end

section

def existsListChar (g : ℕ → ℕ) (p c : ℕ) : ℕ := foldCode (existsListStp g) p 0 c
end

section

def isBinDigit (n : ℕ) : ℕ :=
  selectFn (isOne (1 - n)) 1 (selectFn (isOne (2 - n)) 1 0)
end

section

def allBinDigitsChar (c : ℕ) : ℕ :=
  allListChar (fun t => isBinDigit t.unpair.1) 0 c
end

section

def isZero (n : ℕ) : ℕ := 1 - min n 1
end

section

theorem le_pair_right (a b : ℕ) : b ≤ Nat.pair a b := by
  have hbb : b ≤ b * b := by
    rcases Nat.eq_zero_or_pos b with h | h
    · simp [h]
    · exact Nat.le_mul_of_pos_left b h
  unfold Nat.pair
  split <;> omega
end

section
set_option maxHeartbeats 800000 in

def listLenStp (w : ℕ) : ℕ := w.unpair.2.unpair.1 + 1
end

section
set_option maxHeartbeats 800000 in

def listLenChar (c : ℕ) : ℕ := foldCode listLenStp 0 0 c
end
```

```
section

def lowOr (x y : ℕ) : ℕ := 1 - (1 - (x % 2 + y % 2))
end

section

def lorStep (s : ℕ) : ℕ :=
  Nat.pair (Nat.pair (s.unpair.1.unpair.1 / 2) (s.unpair.1.unpair.2 / 2))
    (Nat.pair (2 * s.unpair.2.unpair.1)
      (s.unpair.2.unpair.2 + s.unpair.2.unpair.1 * lowOr s.unpair.1.unpair.1 s.unpair
    .1.unpair.2))
end

section

def mapPairStep (n acc x : ℕ) : ℕ := Nat.pair (Nat.pair n x) acc + 1
end

section

def mapPairStp (w : ℕ) : ℕ :=
  mapPairStep w.unpair.2.unpair.2 w.unpair.2.unpair.1 w.unpair.1
end

section

def mapPairCode (n c : ℕ) : ℕ := foldCode mapPairStp n 0 c
end

section
set_option maxHeartbeats 800000 in

def mulBit (a b : ℕ) : ℕ := a * b
end

section
set_option maxHeartbeats 800000 in

def decodeFuelOkCharBody (prev : ℕ → ℕ) (c : ℕ) : ℕ :=
  let sub := mulBit (prev c.unpair.2.unpair.1) (prev c.unpair.2.unpair.2)
  selectFn (isOne (1 - c.unpair.1))
    (selectFn (isOne (1 - c.unpair.2)) 1 0)
    (selectFn (isOne (2 - c.unpair.1)) (allBinDigitsChar c.unpair.2)
      (selectFn (isOne (3 - c.unpair.1)) sub
        (selectFn (isOne (4 - c.unpair.1)) sub 0)))
end

section
set_option maxHeartbeats 800000 in

def decodeFuelOkChar : ℕ → ℕ → ℕ
  | 0, _ => 0
  | fuel + 1, c => decodeFuelOkCharBody (decodeFuelOkChar fuel) c
end
```

```
section

def myLor (a b : ℕ) : ℕ :=
  (lorStep^[a + b] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.2
end

section
set_option maxHeartbeats 800000 in

def natEqChar (a b : ℕ) : ℕ := 1 - ((a - b) + (b - a))
end

section
set_option maxHeartbeats 800000 in

@[simp] theorem natEqChar_eq_one_iff (a b : ℕ) : natEqChar a b = 1 ↔ a = b := by
  unfold natEqChar; omega
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

def autStateCardFuelCharBody (prev : ℕ → ℕ) (c : ℕ) : ℕ :=
  let subAdd := prev c.unpair.2.unpair.1 + prev c.unpair.2.unpair.2
  let subMul := prev c.unpair.2.unpair.1 * prev c.unpair.2.unpair.2
  selectFn (isOne (1 - c.unpair.1))
    1
    (selectFn (isOne (2 - c.unpair.1))
      (listLenChar c.unpair.2 + 2)
      (selectFn (isOne (3 - c.unpair.1))
        subAdd
        (selectFn (isOne (4 - c.unpair.1)) subMul 0)))
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

def autStateCardFuelChar : ℕ → ℕ → ℕ
  | 0, _ => 0
  | fuel + 1, c => autStateCardFuelCharBody (autStateCardFuelChar fuel) c
end
```

```
section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

def c9b5_boolNat (b : Bool) : ℕ := if b then 1 else 0
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

def c9b5_encodeListBool (σ : List Bool) : ℕ := encodeList (σ.map c9b5_boolNat)
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

def c9b5_sexprDepth : SExpr → ℕ
  | .sigma => 1
  | .single _ => 1
  | .cat a b => 1 + max (c9b5_sexprDepth a) (c9b5_sexprDepth b)
  | .cap a b => 1 + max (c9b5_sexprDepth a) (c9b5_sexprDepth b)
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

def c9b5_sexprGodelEncode : SExpr → ℕ
  | .sigma => Nat.pair 0 0
  | .single σ => Nat.pair 1 (c9b5_encodeListBool σ)
```

```
  | .cat a b => Nat.pair 2 (Nat.pair (c9b5_sexprGodelEncode a) (c9b5_sexprGodelEncode
    b))
  | .cap a b => Nat.pair 3 (Nat.pair (c9b5_sexprGodelEncode a) (c9b5_sexprGodelEncode
    b))
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

set_option maxHeartbeats 1600000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

def capCode (a b : ℕ) : ℕ := Nat.pair 3 (Nat.pair a b)
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

set_option maxHeartbeats 1600000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

def codeBound : ℕ → ℕ
  | 0 => 1
  | n + 1 => Nat.pair 1 (codeBound n) + 1
end

section
set_option maxHeartbeats 800000 in

def listEqStpNonzero (w : ℕ) : ℕ :=
  Nat.pair
    (selectFn w.unpair.2.unpair.1.unpair.1
      (natEqChar w.unpair.1 ((w.unpair.2.unpair.1.unpair.2 - 1).unpair.1)) 0)
    ((w.unpair.2.unpair.1.unpair.2 - 1).unpair.2)
end
```

```
section
set_option maxHeartbeats 800000 in

def listEqStp (w : ℕ) : ℕ :=
  selectFn (isZero w.unpair.2.unpair.1.unpair.2) (Nat.pair 0 0) (listEqStpNonzero w)
end

section
set_option maxHeartbeats 800000 in

def listEqChar (c1 c2 : ℕ) : ℕ :=
  let r := foldCode listEqStp 0 (Nat.pair 1 c2) c1
  mulBit r.unpair.1 (isZero r.unpair.2)
end

section
set_option maxHeartbeats 800000 in

def listEqStep (st x : ℕ) : ℕ := listEqStp (Nat.pair x (Nat.pair st 0))
end

section
set_option maxHeartbeats 800000 in

def nthStp (w : ℕ) : ℕ :=
  Nat.pair (w.unpair.2.unpair.1.unpair.1 + 1)
    (selectFn (1 - ((w.unpair.2.unpair.1.unpair.1 - w.unpair.2.unpair.2)
        + (w.unpair.2.unpair.2 - w.unpair.2.unpair.1.unpair.1)))
      w.unpair.1 w.unpair.2.unpair.1.unpair.2)
end

section
set_option maxHeartbeats 800000 in

def nthCode (c i d : ℕ) : ℕ := (foldCode nthStp i (Nat.pair 0 d) c).unpair.2
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

def appendListTabFn (w : ℕ) : ℕ :=
  let i := w.unpair.1
  let p := w.unpair.2
  let len1 := p.unpair.2.unpair.2
  selectFn (isZero ((i + 1) - len1))
    (nthCode p.unpair.1 i 0)
    (nthCode p.unpair.2.unpair.1 (i - len1) 0)
end

section
set_option maxHeartbeats 800000 in
```

```
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

def autStateCardFuelCharLookup (w : ℕ) : ℕ :=
  autStateCardFuelCharBody (fun c' => nthCode w.unpair.1 c' 0) w.unpair.2
end

section
set_option maxHeartbeats 800000 in

def decodeFuelOkCharLookup (w : ℕ) : ℕ :=
  decodeFuelOkCharBody (fun c' => nthCode w.unpair.1 c' 0) w.unpair.2
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

def dropListTabFn (w : ℕ) : ℕ :=
  nthCode (w.unpair.2.unpair.2) (w.unpair.1 + w.unpair.2.unpair.1) 0
end

section

def reForallF (qc : ℕ → ℕ) (acc x : ℕ) : ℕ :=
  Nat.pair (acc.unpair.1 - 1).unpair.2
    (selectFn acc.unpair.2 (isOne (qc (Nat.pair (acc.unpair.1 - 1).unpair.1 x))) 0)
end

section

def reForallStp (qc : ℕ → ℕ) (w : ℕ) : ℕ :=
  Nat.pair (w.unpair.2.unpair.1.unpair.1 - 1).unpair.2
    (selectFn w.unpair.2.unpair.1.unpair.2
      (isOne (qc (Nat.pair (w.unpair.2.unpair.1.unpair.1 - 1).unpair.1 w.unpair.1)))
    0)
end

section

def reForallChar (qc : ℕ → ℕ) (w c : ℕ) : ℕ :=
  (foldCode (reForallStp qc) 0 (Nat.pair w 1) c).unpair.2
end

section

theorem sqrt_le_add (n : ℕ) : n ≤ Nat.sqrt n * Nat.sqrt n + Nat.sqrt n + Nat.sqrt n :=
     by
  have h := lt_succ_sqrt n
```

```
  have e : (Nat.sqrt n + 1) * (Nat.sqrt n + 1)
      = Nat.sqrt n * Nat.sqrt n + Nat.sqrt n + Nat.sqrt n + 1 := Nat.succ_mul_succ _ _
  omega
end

section

theorem pair_unpair (n : ℕ) : Nat.pair (Nat.unpair n).1 (Nat.unpair n).2 = n := by
  have sm : Nat.sqrt n * Nat.sqrt n + (n - Nat.sqrt n * Nat.sqrt n) = n :=
    Nat.add_sub_cancel' (sqrt_le _)
  have hadd := sqrt_le_add n
  rw [Nat.unpair]
  if h : n - Nat.sqrt n * Nat.sqrt n < Nat.sqrt n then
    rw [ite_eq_left h]
    show Nat.pair (n - Nat.sqrt n * Nat.sqrt n) (Nat.sqrt n) = n
    rw [Nat.pair, ite_eq_left h]
    omega
  else
    rw [ite_eq_right h]
    have hge : Nat.sqrt n ≤ n - Nat.sqrt n * Nat.sqrt n := Nat.le_of_not_lt h
    have hlt : ¬ Nat.sqrt n < n - Nat.sqrt n * Nat.sqrt n - Nat.sqrt n := by omega
    show Nat.pair (Nat.sqrt n) (n - Nat.sqrt n * Nat.sqrt n - Nat.sqrt n) = n
    rw [Nat.pair, ite_eq_right hlt]
    omega
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

set_option maxHeartbeats 1600000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

def subsetBoundChar (fuel c1 c2 : ℕ) : ℕ :=
  2 ^ (autStateCardFuelChar fuel c1) * 2 ^ (autStateCardFuelChar fuel c2)
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722
```

```
set_option maxHeartbeats 1600000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

def subsetGuardChar (fuel c1 c2 i : ℕ) : ℕ :=
  mulBit (allBinDigitsChar i) (isOne (1 - (listLenChar i - subsetBoundChar fuel c1 c2)
    ))
end

section
set_option maxHeartbeats 800000 in

def tabStep (g : ℕ → ℕ) (w : ℕ) : ℕ :=
  Nat.pair (g (Nat.pair (w.unpair.1.unpair.1 - 1 - w.unpair.2.unpair.1) w.unpair.1.
    unpair.2))
    w.unpair.2.unpair.2 + 1
end

section
set_option maxHeartbeats 800000 in

def tabCode (g : ℕ → ℕ) (a B : ℕ) : ℕ :=
  Nat.rec (motive := fun _ => ℕ) 0 (fun y IH => tabStep g (Nat.pair a (Nat.pair y IH))
    ) B
end

section
set_option maxHeartbeats 800000 in


set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

def appendListCode (c1 c2 : ℕ) : ℕ :=
  let len1 := listLenChar c1
  let len2 := listLenChar c2
  tabCode appendListTabFn (Nat.pair (len1 + len2) (Nat.pair c1 (Nat.pair c2 len1))) (
    len1 + len2)
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

def dropCode (n c : ℕ) : ℕ :=
  let len := listLenChar c
  tabCode dropListTabFn (Nat.pair (len - n) (Nat.pair n c)) (len - n)
end

section
set_option maxHeartbeats 800000 in
```

```
def fuelTableStep (bodyLookup : ℕ → ℕ) (bound prevTable : ℕ) : ℕ :=
  tabCode (fun w => bodyLookup (Nat.pair w.unpair.2 w.unpair.1))
    (Nat.pair (bound + 1) prevTable) (bound + 1)
end

section
set_option maxHeartbeats 800000 in

def fuelTable (bodyLookup : ℕ → ℕ) (bound fuel : ℕ) : ℕ :=
  Nat.rec (motive := fun _ => ℕ) (tabCode (fun _ => 0) (Nat.pair (bound + 1) 0) (bound
     + 1))
    (fun _ prevTable => fuelTableStep bodyLookup bound prevTable) fuel
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

def takeListTabFn (w : ℕ) : ℕ := nthCode (w.unpair.2.unpair.2) w.unpair.1 0
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

def takeCode (n c : ℕ) : ℕ :=
  let len := listLenChar c
  let B := Nat.min n len
  tabCode takeListTabFn (Nat.pair B (Nat.pair n c)) B
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

def matchesBCatG (prev : ℕ → ℕ) (p : ℕ) : ℕ :=
  let i := p.unpair.1
  let c := p.unpair.2.unpair.1
  let cw := p.unpair.2.unpair.2
  mulBit (prev (Nat.pair c.unpair.2.unpair.1 (takeCode i cw)))
         (prev (Nat.pair c.unpair.2.unpair.2 (dropCode i cw)))
end
```

```
section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

set_option maxHeartbeats 1600000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

def matchesBCatGLookup (w : ℕ) : ℕ :=
  matchesBCatG (fun p' => nthCode w.unpair.1 p' 0) w.unpair.2
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

def matchesBCharBody (prev : ℕ → ℕ) (c cw : ℕ) : ℕ :=
  let catExist := bExistsFn (matchesBCatG prev) (Nat.pair c cw) (listLenChar cw + 1)
  let capAnd := mulBit (prev (Nat.pair c.unpair.2.unpair.1 cw))
                  (prev (Nat.pair c.unpair.2.unpair.2 cw))
  selectFn (isOne (1 - c.unpair.1))
    1
    (selectFn (isOne (2 - c.unpair.1))
      (listEqChar cw c.unpair.2)
      (selectFn (isOne (3 - c.unpair.1))
        catExist
        (selectFn (isOne (4 - c.unpair.1)) capAnd 0)))
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

def matchesBChar : ℕ → ℕ → ℕ → ℕ
  | 0, _, _ => 0
  | fuel + 1, c, cw =>
```

```
      matchesBCharBody (fun p => matchesBChar fuel p.unpair.1 p.unpair.2) c cw
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

set_option maxHeartbeats 1600000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

def decideNonemptyBChar (fuel : ℕ) (c_e : ℕ) : ℕ :=
  bExistsFn (fun p =>
      mulBit (allBinDigitsChar p.unpair.1) (matchesBChar fuel p.unpair.2 p.unpair.1))
    c_e (codeBound (autStateCardFuelChar fuel c_e))
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

set_option maxHeartbeats 1600000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

def consistentBChar (fuel : ℕ) (c1 c2 : ℕ) : ℕ :=
  decideNonemptyBChar fuel (capCode c1 c2)
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

set_option maxHeartbeats 1600000 in
```

```
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

def matchesBCharBodyLookup (w : ℕ) : ℕ :=
  matchesBCharBody (fun p' => nthCode w.unpair.1 p' 0) w.unpair.2.unpair.1 w.unpair.2.
    unpair.2
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

set_option maxHeartbeats 1600000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

@[irreducible] def subsetBChar (fuel c1 c2 : ℕ) : ℕ :=
  bForallFn (fun p =>
      selectFn (subsetGuardChar fuel p.unpair.2.unpair.1 p.unpair.2.unpair.2 p.unpair
    .1)
        (selectFn (matchesBChar fuel p.unpair.2.unpair.1 p.unpair.1)
          (matchesBChar fuel p.unpair.2.unpair.2 p.unpair.1) 1)
        1)
    (Nat.pair c1 c2) (codeBound (subsetBoundChar fuel c1 c2))
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

set_option maxHeartbeats 1600000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

@[irreducible] def interEqChar (fuel c1 c2 : ℕ) : ℕ :=
  mulBit (subsetBChar fuel c1 c2) (subsetBChar fuel c2 c1)
```

```
end

section

theorem unpair_snd_le (n : ℕ) : n.unpair.2 ≤ n := by
  have h := le_pair_right n.unpair.1 n.unpair.2
  rwa [pair_unpair] at h
end

section

def decodeList : ℕ → List ℕ
  | 0 => []
  | (c + 1) => c.unpair.1 :: decodeList c.unpair.2
decreasing_by exact Nat.lt_succ_of_le (unpair_snd_le c)
end

section
set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

set_option maxHeartbeats 1600000 in

set_option maxHeartbeats 800000 in

set_option maxHeartbeats 800000 in

def c9b6_decodeListBool (c : ℕ) : List Bool :=
  (decodeList c).map fun n => decide (n = 1)
end

section

theorem primrec_id : Nat.Primrec id :=
  (Nat.Primrec.left.pair Nat.Primrec.right).of_eq fun n => pair_unpair n

theorem rec_add (a b : ℕ) : Nat.rec a (fun _ IH => IH + 1) b = a + b := by
  induction b with
  | zero => rfl
  | succ k ih => show Nat.rec a (fun _ IH => IH + 1) k + 1 = a + (k + 1); omega

private theorem rec_mul (a b : ℕ) : Nat.rec 0 (fun _ IH => a + IH) b = a * b := by
  induction b with
  | zero => rfl
  | succ k ih =>
    show a + Nat.rec 0 (fun _ IH => a + IH) k = a * (k + 1)
    rw [Nat.mul_succ]; omega

theorem primrec_add : Nat.Primrec (Nat.unpaired (· + ·)) :=
  (Nat.Primrec.prec primrec_id
```

```
      ((Nat.Primrec.succ.comp Nat.Primrec.right).comp Nat.Primrec.right)).of_eq fun p
    => by
    simp only [unpair_pair_snd, id_eq]
    exact rec_add _ _

theorem primrec_mul : Nat.Primrec (Nat.unpaired (· * ·)) :=
  (Nat.Primrec.prec Nat.Primrec.zero
      (primrec_add.comp (Nat.Primrec.pair Nat.Primrec.left
        (Nat.Primrec.right.comp Nat.Primrec.right)))).of_eq fun p => by
    simp only [unpair_pair_fst, unpair_pair_snd, Nat.unpaired]
    exact rec_mul _ _

private theorem rec_pred (n : ℕ) : Nat.rec 0 (fun y _ => y) n = n - 1 := by
  cases n with
  | zero => rfl
  | succ k => rfl

theorem primrec_pred : Nat.Primrec (fun n => n - 1) :=
  ((Nat.Primrec.prec Nat.Primrec.zero (Nat.Primrec.left.comp Nat.Primrec.right)).comp
    (primrec_id.pair primrec_id)).of_eq fun n => by
    simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]
    exact rec_pred n

private theorem rec_sub (a b : ℕ) : Nat.rec a (fun _ IH => IH - 1) b = a - b := by
  induction b with
  | zero => rfl
  | succ k ih => show Nat.rec a (fun _ IH => IH - 1) k - 1 = a - (k + 1); rw [ih];
    omega

theorem primrec_sub : Nat.Primrec (Nat.unpaired (· - ·)) :=
  (Nat.Primrec.prec primrec_id
    ((primrec_pred.comp Nat.Primrec.right).comp Nat.Primrec.right)).of_eq fun p => by
    simp only [unpair_pair_snd, id_eq]
    exact rec_sub _ _

theorem nat_mul_eq_one {a b : ℕ} : a * b = 1 ↔ a = 1 ∧ b = 1 := by
  refine ⟨fun h => ⟨Nat.dvd_one.mp ⟨b, h.symm⟩, Nat.dvd_one.mp ⟨a, ?_⟩⟩, fun h => by rw [
    h.1, h.2]⟩
  rw [Nat.mul_comm] at h; exact h.symm

theorem primrec_add₂ {f g : ℕ → ℕ} (hf : Nat.Primrec f) (hg : Nat.Primrec g) :
    Nat.Primrec (fun n => f n + g n) :=
  (primrec_add.comp (hf.pair hg)).of_eq fun n => by
    simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]

theorem primrec_mul₂ {f g : ℕ → ℕ} (hf : Nat.Primrec f) (hg : Nat.Primrec g) :
    Nat.Primrec (fun n => f n * g n) :=
  (primrec_mul.comp (hf.pair hg)).of_eq fun n => by
    simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]

theorem primrec_sub₂ {f g : ℕ → ℕ} (hf : Nat.Primrec f) (hg : Nat.Primrec g) :
    Nat.Primrec (fun n => f n - g n) :=
  (primrec_sub.comp (hf.pair hg)).of_eq fun n => by
    simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]

theorem primrec_selectFn {c a b : ℕ → ℕ} (hc : Nat.Primrec c) (ha : Nat.Primrec a)
```

```
    (hb : Nat.Primrec b) : Nat.Primrec (fun n => selectFn (c n) (a n) (b n)) :=
  primrec_add₂ (primrec_mul₂ hc ha) (primrec_mul₂ (primrec_sub₂ (Nat.Primrec.const 1)
    hc) hb)

theorem RecDecidable.of_iff {p q : ℕ → Prop} (h : ∀ n, q n ↔ p n) (hp : RecDecidable
    p) :
    RecDecidable q := by
  obtain ⟨f, hf, hfe⟩ := hp
  exact ⟨f, hf, fun n => (h n).trans (hfe n)⟩

theorem RecDecidable.comp {p : ℕ → Prop} (hp : RecDecidable p) {g : ℕ → ℕ}
    (hg : Nat.Primrec g) : RecDecidable (fun n => p (g n)) := by
  obtain ⟨f, hf, hfe⟩ := hp
  exact ⟨fun n => f (g n), hf.comp hg, fun n => hfe (g n)⟩

theorem RecDecidable.and {p q : ℕ → Prop} (hp : RecDecidable p) (hq : RecDecidable q)
    :
    RecDecidable (fun n => p n ∧ q n) := by
  obtain ⟨f, hf, hfe⟩ := hp
  obtain ⟨g, hg, hge⟩ := hq
  refine ⟨fun n => f n * g n, ?_, fun n => ?_⟩
  · exact (primrec_mul.comp (hf.pair hg)).of_eq fun n => by
      simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]
  · rw [nat_mul_eq_one]; exact and_congr (hfe n) (hge n)

theorem RecDecidable.natEq {a b : ℕ → ℕ} (ha : Nat.Primrec a) (hb : Nat.Primrec b) :
    RecDecidable (fun t => a t = b t) := by
  refine ⟨fun t => Nat.unpaired (· - ·) (Nat.pair 1 (Nat.unpaired (· + ·)
      (Nat.pair (Nat.unpaired (· - ·) (Nat.pair (a t) (b t)))
        (Nat.unpaired (· - ·) (Nat.pair (b t) (a t)))))), ?_, fun t => ?_⟩
  · exact primrec_sub.comp ((Nat.Primrec.const 1).pair (primrec_add.comp
      ((primrec_sub.comp (ha.pair hb)).pair (primrec_sub.comp (hb.pair ha)))))
  · simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]
    constructor <;> intro h <;> omega

theorem RecDecidable.not {p : ℕ → Prop} (hp : RecDecidable p) : RecDecidable (fun n =>
    ¬ p n) := by
  obtain ⟨f, hf, hfe⟩ := hp
  refine ⟨fun n => Nat.unpaired (· - ·) (Nat.pair 1 (Nat.unpaired (· - ·) (Nat.pair 1
      (Nat.unpaired (· + ·) (Nat.pair (Nat.unpaired (· - ·) (Nat.pair (f n) 1))
        (Nat.unpaired (· - ·) (Nat.pair 1 (f n)))))))), ?_, fun n => ?_⟩
  · exact primrec_sub.comp ((Nat.Primrec.const 1).pair (primrec_sub.comp
      ((Nat.Primrec.const 1).pair (primrec_add.comp
        ((primrec_sub.comp (hf.pair (Nat.Primrec.const 1))).pair
          (primrec_sub.comp ((Nat.Primrec.const 1).pair hf)))))))
  · show ¬ p n ↔ _
    rw [hfe n]
    simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]
    constructor <;> intro h <;> omega

theorem RecDecidable.em {p : ℕ → Prop} (hp : RecDecidable p) (n : ℕ) : p n ∨ ¬ p n :=
    by
  obtain ⟨f, _, hfe⟩ := hp
  by_cases h : f n = 1
  · exact Or.inl ((hfe n).mpr h)
  · exact Or.inr (fun hp => h ((hfe n).mp hp))
```

```
theorem RecDecidable.or {p q : ℕ → Prop} (hp : RecDecidable p) (hq : RecDecidable q) :
    RecDecidable (fun n => p n ∨ q n) := by
  refine RecDecidable.of_iff (fun n => ?_) (hp.not.and hq.not).not
  constructor
  · rintro (h | h) ⟨hnp, hnq⟩
    · exact hnp h
    · exact hnq h
  · intro h
    rcases hp.em n with hp' | hp'
    · exact Or.inl hp'
    · rcases hq.em n with hq' | hq'
      · exact Or.inr hq'
      · exact absurd ⟨hp', hq'⟩ h

theorem RecDecidable.re {p : ℕ → Prop} (hp : RecDecidable p) : REPred p := by
  refine ⟨fun t => p t.unpair.2, hp.comp Nat.Primrec.right, fun n => ?_⟩
  simp only [unpair_pair_snd]
  exact ⟨fun h => ⟨0, h⟩, fun ⟨_, h⟩ => h⟩

theorem RecDecidable₂.re {r : ℕ → ℕ → Prop} (hr : RecDecidable₂ r) : REPred₂ r :=
  RecDecidable.re hr

theorem REPred.of_iff {p q : ℕ → Prop} (h : ∀ n, q n ↔ p n) (hp : REPred p) : REPred
    q := by
  obtain ⟨r, hr, hre⟩ := hp
  exact ⟨r, hr, fun n => (h n).trans (hre n)⟩

theorem REPred.comp {p : ℕ → Prop} (hp : REPred p) {g : ℕ → ℕ} (hg : Nat.Primrec g)
    :
    REPred (fun n => p (g n)) := by
  obtain ⟨q, hq, hqe⟩ := hp
  refine ⟨fun t => q (Nat.pair t.unpair.1 (g t.unpair.2)),
    hq.comp (Nat.Primrec.left.pair (hg.comp Nat.Primrec.right)), fun n => ?_⟩
  simp only [unpair_pair_fst, unpair_pair_snd]
  exact hqe (g n)

theorem REPred.and {p q : ℕ → Prop} (hp : REPred p) (hq : REPred q) :
    REPred (fun n => p n ∧ q n) := by
  obtain ⟨a, ha, hae⟩ := hp
  obtain ⟨b, hb, hbe⟩ := hq
  refine ⟨fun u => a (Nat.pair u.unpair.1.unpair.1 u.unpair.2)
      ∧ b (Nat.pair u.unpair.1.unpair.2 u.unpair.2),
    (ha.comp ((Nat.Primrec.left.comp Nat.Primrec.left).pair Nat.Primrec.right)).and
      (hb.comp ((Nat.Primrec.right.comp Nat.Primrec.left).pair Nat.Primrec.right)),
    fun n => ?_⟩
  simp only [unpair_pair_fst, unpair_pair_snd]
  rw [hae n, hbe n]
  constructor
  · rintro ⟨⟨i, hi⟩, ⟨j, hj⟩⟩
    exact ⟨Nat.pair i j, by simp only [unpair_pair_fst, unpair_pair_snd]; exact ⟨hi, hj
    ⟩⟩
  · rintro ⟨w, hw1, hw2⟩
    exact ⟨⟨w.unpair.1, hw1⟩, ⟨w.unpair.2, hw2⟩⟩

theorem REPred.proj {p : ℕ → Prop} (hp : REPred p) :
```

```
    REPred (fun n => ∃ i, p (Nat.pair i n)) := by
  obtain ⟨q, hq, hqe⟩ := hp
  refine ⟨fun u => q (Nat.pair u.unpair.1.unpair.2 (Nat.pair u.unpair.1.unpair.1 u.
    unpair.2)),
    hq.comp ((Nat.Primrec.right.comp Nat.Primrec.left).pair
      ((Nat.Primrec.left.comp Nat.Primrec.left).pair Nat.Primrec.right)), fun n => ?_⟩
  simp only [unpair_pair_fst, unpair_pair_snd]
  constructor
  · rintro ⟨i, hi⟩
    rw [hqe (Nat.pair i n)] at hi
    obtain ⟨j, hj⟩ := hi
    exact ⟨Nat.pair i j, by simpa only [unpair_pair_fst, unpair_pair_snd] using hj⟩
  · rintro ⟨w, hw⟩
    refine ⟨w.unpair.1, ?_⟩
    rw [hqe (Nat.pair w.unpair.1 n)]
    exact ⟨w.unpair.2, hw⟩

theorem REPred.or {p q : ℕ → Prop} (hp : REPred p) (hq : REPred q) :
    REPred (fun n => p n ∨ q n) := by
  obtain ⟨a, ha, hae⟩ := hp
  obtain ⟨b, hb, hbe⟩ := hq
  refine ⟨fun u => (a (Nat.pair u.unpair.1.unpair.2 u.unpair.2) ∧ u.unpair.1.unpair.1 =
     0)
      ∨ (b (Nat.pair u.unpair.1.unpair.2 u.unpair.2) ∧ u.unpair.1.unpair.1 = 1), ?_,
    fun n => ?_⟩
  · refine RecDecidable.or (RecDecidable.and ?_ ?_) (RecDecidable.and ?_ ?_)
    · exact ha.comp ((Nat.Primrec.right.comp Nat.Primrec.left).pair Nat.Primrec.right)
    · exact RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.
    const 0)
    · exact hb.comp ((Nat.Primrec.right.comp Nat.Primrec.left).pair Nat.Primrec.right)
    · exact RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.
    const 1)
  · show p n ∨ q n ↔ _
    rw [hae n, hbe n]
    constructor
    · rintro (⟨i, hi⟩ | ⟨i, hi⟩)
      · refine ⟨Nat.pair 0 i, Or.inl ⟨?_, ?_⟩⟩
        · simpa only [unpair_pair_fst, unpair_pair_snd] using hi
        · simp only [unpair_pair_fst]
      · refine ⟨Nat.pair 1 i, Or.inr ⟨?_, ?_⟩⟩
        · simpa only [unpair_pair_fst, unpair_pair_snd] using hi
        · simp only [unpair_pair_fst]
    · rintro ⟨w, hw⟩
      simp only [unpair_pair_fst, unpair_pair_snd] at hw
      rcases hw with ⟨hi, _⟩ | ⟨hi, _⟩
      · exact Or.inl ⟨w.unpair.2, hi⟩
      · exact Or.inr ⟨w.unpair.2, hi⟩

theorem le_pair_left (a b : ℕ) : a ≤ Nat.pair a b := by
  unfold Nat.pair
  split <;> omega

theorem encodeList_length_le : ∀ l : List ℕ, l.length ≤ encodeList l
  | [] => Nat.le_refl 0
  | a :: l => by
    simp only [encodeList, List.length_cons]
```

```
    have hrec := encodeList_length_le l
    have hle : encodeList l ≤ Nat.pair a (encodeList l) := le_pair_right a (encodeList
     l)
    omega

theorem foldStep_zero (stp : ℕ → ℕ) (params acc : ℕ) :
    foldStep stp params (Nat.pair 0 acc) = Nat.pair 0 acc := by
  unfold foldStep
  simp only [unpair_pair_fst, unpair_pair_snd, Nat.sub_zero, selectFn_one]

theorem foldStep_pos (stp : ℕ → ℕ) (params a t acc : ℕ) :
    foldStep stp params (Nat.pair (Nat.pair a t + 1) acc)
      = Nat.pair t (stp (Nat.pair a (Nat.pair acc params))) := by
  unfold foldStep
  simp only [unpair_pair_fst, unpair_pair_snd]
  have h1 : 1 - (Nat.pair a t + 1) = 0 := by omega
  have h2 : Nat.pair a t + 1 - 1 = Nat.pair a t := by omega
  rw [h1, h2, selectFn_zero, unpair_pair_fst, unpair_pair_snd]

theorem rec_const_iterate (f : ℕ → ℕ) (s : ℕ) :
    ∀ k : ℕ, Nat.rec (motive := fun _ => ℕ) s (fun _ ih => f ih) k = f^[k] s
  | 0 => rfl
  | (k + 1) => by
      rw [Function.iterate_succ_apply']
      exact congrArg f (rec_const_iterate f s k)

theorem foldStep_iterate (stp : ℕ → ℕ) (params : ℕ) :
    ∀ (k : ℕ) (l : List ℕ) (acc : ℕ), l.length ≤ k →
      ((foldStep stp params)^[k] (Nat.pair (encodeList l) acc)).unpair.2
        = List.foldl (fun acc x => stp (Nat.pair x (Nat.pair acc params))) acc l := by
  intro k
  induction k with
  | zero =>
    intro l acc hlen
    cases l with
    | nil => simp only [Function.iterate_zero_apply, encodeList, unpair_pair_snd, List
    .foldl_nil]
    | cons a l' => simp only [List.length_cons] at hlen; omega
  | succ k ih =>
    intro l acc hlen
    rw [Function.iterate_succ_apply]
    cases l with
    | nil =>
      rw [show encodeList ([] : List ℕ) = 0 from rfl, foldStep_zero]
      exact ih [] acc (Nat.zero_le k)
    | cons a l' =>
      have hlen' : l'.length ≤ k := by simp only [List.length_cons] at hlen; omega
      rw [show encodeList (a :: l') = Nat.pair a (encodeList l') + 1 from rfl,
    foldStep_pos,
        ih l' (stp (Nat.pair a (Nat.pair acc params))) hlen', List.foldl_cons]

theorem foldCode_eq (stp : ℕ → ℕ) (params z : ℕ) (l : List ℕ) :
    foldCode stp params z (encodeList l)
      = List.foldl (fun acc x => stp (Nat.pair x (Nat.pair acc params))) z l := by
  unfold foldCode
  exact foldStep_iterate stp params (encodeList l) l z (encodeList_length_le l)
```

```
theorem unpair_left_le (n : ℕ) : n.unpair.1 ≤ n := by
  have h := le_pair_left n.unpair.1 n.unpair.2
  rwa [pair_unpair] at h

theorem pair_le_pair_left (b : ℕ) {a a' : ℕ} (h : a ≤ a') : Nat.pair a b ≤ Nat.pair a
    ' b := by
  rcases eq_or_lt_of_le h with rfl | hlt
  · exact le_refl _
  · exact le_of_lt (Nat.pair_lt_pair_left b hlt)

theorem pair_le_pair_right' (a : ℕ) {b b' : ℕ} (h : b ≤ b') : Nat.pair a b ≤ Nat.pair
     a b' := by
  rcases eq_or_lt_of_le h with rfl | hlt
  · exact le_refl _
  · exact le_of_lt (Nat.pair_lt_pair_right a hlt)

theorem pair_le_pair {a b a' b' : ℕ} (ha : a ≤ a') (hb : b ≤ b') :
    Nat.pair a b ≤ Nat.pair a' b' :=
  le_trans (pair_le_pair_left b ha) (pair_le_pair_right' a' hb)

theorem decodeList_zero : decodeList 0 = [] := by rw [decodeList]

theorem decodeList_succ (c : ℕ) :
    decodeList (c + 1) = c.unpair.1 :: decodeList c.unpair.2 := by
  rw [decodeList]

theorem encodeList_decodeList (c : ℕ) : encodeList (decodeList c) = c := by
  induction c using Nat.strong_induction_on with
  | _ c ih =>
    cases c with
    | zero => simp only [decodeList_zero, encodeList]
    | succ d =>
      rw [decodeList_succ, encodeList, ih d.unpair.2 (Nat.lt_succ_of_le (unpair_snd_le
     d)),
        pair_unpair]

theorem foldCode_eq' (stp : ℕ → ℕ) (params z c : ℕ) :
    foldCode stp params z c
      = List.foldl (fun acc x => stp (Nat.pair x (Nat.pair acc params))) z (decodeList
     c) := by
  conv_lhs => rw [← encodeList_decodeList c]
  rw [foldCode_eq]

theorem primrec_foldStepPacked {stp : ℕ → ℕ} (hstp : Nat.Primrec stp) :
    Nat.Primrec (fun w => foldStep stp w.unpair.1 w.unpair.2) := by
  have hparams : Nat.Primrec (fun w => w.unpair.1) := Nat.Primrec.left
  have hstate : Nat.Primrec (fun w => w.unpair.2) := Nat.Primrec.right
  have hrc : Nat.Primrec (fun w => w.unpair.2.unpair.1) := Nat.Primrec.left.comp Nat.
    Primrec.right
  have hacc : Nat.Primrec (fun w => w.unpair.2.unpair.2) := Nat.Primrec.right.comp Nat
    .Primrec.right
  have hcond : Nat.Primrec (fun w => 1 - w.unpair.2.unpair.1) :=
    primrec_sub₂ (Nat.Primrec.const 1) hrc
  have hrcm1 : Nat.Primrec (fun w => w.unpair.2.unpair.1 - 1) :=
    primrec_sub₂ hrc (Nat.Primrec.const 1)
```

```
  have hhead : Nat.Primrec (fun w => (w.unpair.2.unpair.1 - 1).unpair.1) :=
    Nat.Primrec.left.comp hrcm1
  have htail : Nat.Primrec (fun w => (w.unpair.2.unpair.1 - 1).unpair.2) :=
    Nat.Primrec.right.comp hrcm1
  have hinner : Nat.Primrec (fun w => Nat.pair w.unpair.2.unpair.2 w.unpair.1) := hacc
    .pair hparams
  have harg : Nat.Primrec
      (fun w => Nat.pair (w.unpair.2.unpair.1 - 1).unpair.1
        (Nat.pair w.unpair.2.unpair.2 w.unpair.1)) := hhead.pair hinner
  have hstpv : Nat.Primrec
      (fun w => stp (Nat.pair (w.unpair.2.unpair.1 - 1).unpair.1
        (Nat.pair w.unpair.2.unpair.2 w.unpair.1))) := hstp.comp harg
  have helse : Nat.Primrec
      (fun w => Nat.pair (w.unpair.2.unpair.1 - 1).unpair.2
        (stp (Nat.pair (w.unpair.2.unpair.1 - 1).unpair.1
          (Nat.pair w.unpair.2.unpair.2 w.unpair.1)))) := htail.pair hstpv
  exact (primrec_selectFn hcond hstate helse).of_eq fun _ => rfl

theorem primrec_foldCode {stp : ℕ → ℕ} (hstp : Nat.Primrec stp)
    {params z c : ℕ → ℕ} (hp : Nat.Primrec params) (hz : Nat.Primrec z) (hc : Nat.
    Primrec c) :
    Nat.Primrec (fun n => foldCode stp (params n) (z n) (c n)) := by
  have hfoldw : Nat.Primrec (fun w => foldStep stp w.unpair.1 w.unpair.2) :=
    primrec_foldStepPacked hstp
  have hg : Nat.Primrec (fun x => foldStep stp x.unpair.1.unpair.1 x.unpair.2.unpair
    .2) :=
    (hfoldw.comp ((Nat.Primrec.left.comp Nat.Primrec.left).pair
      (Nat.Primrec.right.comp Nat.Primrec.right))).of_eq fun _ => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hprec := Nat.Primrec.prec Nat.Primrec.right hg
  refine (Nat.Primrec.right.comp
    (hprec.comp ((hp.pair (hc.pair hz)).pair hc))).of_eq fun n => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]
  rw [rec_const_iterate]
  rfl

theorem isOne_le_one (v : ℕ) : isOne v ≤ 1 := by unfold isOne; omega

theorem isOne_of_ne_one {v : ℕ} (h : v = 1) : isOne v = 0 := by
  unfold isOne
  omega

theorem primrec_isOne : Nat.Primrec isOne :=
  primrec_sub₂ (Nat.Primrec.const 1)
    (primrec_add₂ (primrec_sub₂ primrec_id (Nat.Primrec.const 1))
      (primrec_sub₂ (Nat.Primrec.const 1) primrec_id))

theorem isZero_eq_one_iff (n : ℕ) : isZero n = 1 ↔ n = 0 := by
  unfold isZero; omega

theorem isZero_le_one (n : ℕ) : isZero n ≤ 1 := by unfold isZero; omega

theorem primrec_isZero : Nat.Primrec isZero := by
  have hmin : Nat.Primrec (fun n => min n 1) :=
    (primrec_sub₂ primrec_id (primrec_sub₂ primrec_id (Nat.Primrec.const 1))).of_eq fun
    n => by
```

```
      rcases n with _ | n
      · rfl
      · show n + 1 - (n + 1 - 1) = min (n + 1) 1
        rw [Nat.min_eq_right (Nat.le_add_left 1 n)]
        omega
  exact primrec_sub₂ (Nat.Primrec.const 1) hmin

theorem primrec_le {f g : ℕ → ℕ} (hf : Nat.Primrec f) (hg : Nat.Primrec g) :
    Nat.Primrec (fun n => isZero (f n - g n)) :=
  primrec_isZero.comp (primrec_sub₂ hf hg)

theorem bForallFn_le_one (g : ℕ → ℕ) (n N : ℕ) : bForallFn g n N ≤ 1 := by
  induction N with
  | zero => exact Nat.le_refl 1
  | succ N ih =>
    show selectFn (bForallFn g n N) (isOne (g (Nat.pair N n))) 0 ≤ 1
    rcases (show bForallFn g n N = 0 ∨ bForallFn g n N = 1 by omega) with h | h
    · rw [h, selectFn_zero]; exact Nat.zero_le 1
    · rw [h, selectFn_one]; exact isOne_le_one _

theorem bForallFn_eq_one_iff (g : ℕ → ℕ) (n N : ℕ) :
    bForallFn g n N = 1 ↔ ∀ i, i < N → g (Nat.pair i n) = 1 := by
  induction N with
  | zero =>
    constructor
    · intro _ i hi; exact absurd hi (Nat.not_lt_zero i)
    · intro _; rfl
  | succ N ih =>
    have hstep : bForallFn g n (N + 1)
        = selectFn (bForallFn g n N) (isOne (g (Nat.pair N n))) 0 := rfl
    have hle := bForallFn_le_one g n N
    rw [hstep]
    rcases (show bForallFn g n N = 0 ∨ bForallFn g n N = 1 by omega) with h0 | h1
    · rw [h0, selectFn_zero]
      constructor
      · intro hcontra; exact absurd hcontra (by decide)
      · intro hall
        have hb : bForallFn g n N = 1 := ih.mpr (fun i hi => hall i (Nat.lt_succ_of_lt
     hi))
        rw [h0] at hb; exact hb
    · rw [h1, selectFn_one, isOne_eq_one_iff]
      constructor
      · intro hgN i hi
        rcases (show i < N ∨ i = N by omega) with hlt | heq
        · exact (ih.mp h1) i hlt
        · subst heq; exact hgN
      · intro hall; exact hall N (Nat.lt_succ_self N)

theorem bExistsFn_le_one (g : ℕ → ℕ) (n N : ℕ) : bExistsFn g n N ≤ 1 := by
  induction N with
  | zero => simp [bExistsFn]
  | succ N ih =>
    show selectFn (bExistsFn g n N) 1 (isOne (g (Nat.pair N n))) ≤ 1
    rcases (show bExistsFn g n N = 0 ∨ bExistsFn g n N = 1 by omega) with h | h
    · rw [h, selectFn_zero]
      exact isOne_le_one _
```

```
    · rw [h, selectFn_one]

theorem bExistsFn_congr {g1 g2 : ℕ → ℕ} {n N : ℕ}
    (h : ∀ i < N, g1 (Nat.pair i n) = g2 (Nat.pair i n)) : bExistsFn g1 n N = bExistsFn
     g2 n N := by
  induction N with
  | zero => rfl
  | succ N ih =>
    show selectFn (bExistsFn g1 n N) 1 (isOne (g1 (Nat.pair N n)))
      = selectFn (bExistsFn g2 n N) 1 (isOne (g2 (Nat.pair N n)))
    rw [ih (fun i hi => h i (Nat.lt_succ_of_lt hi)), h N (Nat.lt_succ_self N)]

theorem bExistsFn_eq_one_iff (g : ℕ → ℕ) (n N : ℕ) :
    bExistsFn g n N = 1 ↔ ∃ i, i < N ∧ g (Nat.pair i n) = 1 := by
  induction N with
  | zero =>
    simp [bExistsFn]
  | succ N ih =>
    have hstep : bExistsFn g n (N + 1)
        = selectFn (bExistsFn g n N) 1 (isOne (g (Nat.pair N n))) := rfl
    rw [hstep]
    have hle := bExistsFn_le_one g n N
    rcases (show bExistsFn g n N = 0 ∨ bExistsFn g n N = 1 by omega) with h0 | h1
    · rw [h0, selectFn_zero, isOne_eq_one_iff]
      constructor
      · intro hgN; exact ⟨N, Nat.lt_succ_self N, hgN⟩
      · intro ⟨i, hi, hg⟩
        rcases (show i < N ∨ i = N by omega) with hlt | heq
        · have hne : bExistsFn g n N = 1 := ih.mpr ⟨i, hlt, hg⟩
          omega
        · subst heq; exact hg
    · rw [h1, selectFn_one]
      constructor
      · intro _
        obtain ⟨i, hi, hg⟩ := ih.mp h1
        exact ⟨i, Nat.lt_succ_of_lt hi, hg⟩
      · intro _; rfl

theorem primrec_bExistsFn {g : ℕ → ℕ} (hg : Nat.Primrec g) :
    Nat.Primrec (fun t => bExistsFn g t.unpair.1 t.unpair.2) := by
  have hGfn : Nat.Primrec (fun w =>
      selectFn w.unpair.2.unpair.2 1 (isOne (g (Nat.pair w.unpair.2.unpair.1 w.unpair
    .1)))) :=
    primrec_selectFn (Nat.Primrec.right.comp Nat.Primrec.right)
      (Nat.Primrec.const 1)
      (primrec_isOne.comp (hg.comp
        ((Nat.Primrec.left.comp Nat.Primrec.right).pair Nat.Primrec.left)))
  have hprec := Nat.Primrec.prec (Nat.Primrec.const 0) hGfn
  refine (hprec.comp (Nat.Primrec.left.pair Nat.Primrec.right)).of_eq fun t => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]
  rfl

theorem primrec_bExistsFn_param {g : ℕ → ℕ} (hg : Nat.Primrec g) :
    Nat.Primrec (fun t => bExistsFn (fun p => g (Nat.pair t.unpair.1.unpair.1 p))
      t.unpair.1.unpair.2 t.unpair.2) := by
  have hGfn : Nat.Primrec (fun w =>
```

```
      selectFn w.unpair.2.unpair.2 1
        (isOne (g (Nat.pair w.unpair.1.unpair.1
          (Nat.pair w.unpair.2.unpair.1 w.unpair.1.unpair.2))))) :=
    primrec_selectFn (Nat.Primrec.right.comp Nat.Primrec.right)
      (Nat.Primrec.const 1)
      (primrec_isOne.comp (hg.comp
        (Nat.Primrec.pair (Nat.Primrec.left.comp Nat.Primrec.left)
          (Nat.Primrec.pair (Nat.Primrec.left.comp Nat.Primrec.right)
            (Nat.Primrec.right.comp Nat.Primrec.left)))))
  have hprec := Nat.Primrec.prec (Nat.Primrec.const 0) hGfn
  refine (hprec.comp (Nat.Primrec.left.pair Nat.Primrec.right)).of_eq fun t => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]
  rfl

theorem decodeList_encodeList : ∀ l : List ℕ, decodeList (encodeList l) = l
  | [] => by rw [encodeList, decodeList_zero]
  | a :: l => by
    rw [encodeList, decodeList_succ, unpair_pair_fst, unpair_pair_snd,
    decodeList_encodeList l]

theorem reForallStp_eq (qc : ℕ → ℕ) (acc x : ℕ) :
    reForallStp qc (Nat.pair x (Nat.pair acc 0)) = reForallF qc acc x := by
  unfold reForallStp reForallF
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem reForallChar_eq (qc : ℕ → ℕ) (w c : ℕ) :
    reForallChar qc w c
      = (List.foldl (reForallF qc) (Nat.pair w 1) (decodeList c)).unpair.2 := by
  have hfun : (fun (acc x : ℕ) => reForallStp qc (Nat.pair x (Nat.pair acc 0))) =
    reForallF qc := by


    funext acc x; exact reForallStp_eq qc acc x
  unfold reForallChar
  rw [foldCode_eq', hfun]

theorem reForallF_foldl_eq_one_iff (qc : ℕ → ℕ) :
    ∀ (l : List ℕ) (w flag : ℕ), flag ≤ 1 →
      ((List.foldl (reForallF qc) (Nat.pair w flag) l).unpair.2 = 1 ↔
        flag = 1 ∧ ∀ k, k < l.length →
          qc (Nat.pair ((decodeList w).getD k 0) (l.getD k 0)) = 1) := by
  intro l
  induction l with
  | nil =>
    intro w flag _
    simp only [List.foldl_nil, unpair_pair_snd, List.length_nil, Nat.not_lt_zero,
      false_implies, implies_true, and_true]
  | cons x l ih =>
    intro w flag hflag
    have hi : (decodeList w).getD 0 0 = (w - 1).unpair.1 := by
      rcases w with _ | c
      · have hz : ((0 : ℕ) - 1).unpair.1 = 0 := by
          rw [Nat.zero_sub]; exact congrArg Prod.fst Nat.unpair_zero
        rw [decodeList_zero, List.getD_nil, hz]
      · rw [decodeList_succ, List.getD_cons_zero, Nat.add_sub_cancel]
    have htail : ∀ k, (decodeList w).getD (k + 1) 0 = (decodeList (w - 1).unpair.2).
    getD k 0 := by
```

```
      intro k
      rcases w with _ | c
      · have hz : ((0 : ℕ) - 1).unpair.2 = 0 := by
          rw [Nat.zero_sub]; exact congrArg Prod.snd Nat.unpair_zero
        rw [decodeList_zero, hz, decodeList_zero, List.getD_nil, List.getD_nil]
      · rw [decodeList_succ, List.getD_cons_succ, Nat.add_sub_cancel]
    have hstep : List.foldl (reForallF qc) (Nat.pair w flag) (x :: l)
        = List.foldl (reForallF qc) (Nat.pair (w - 1).unpair.2
            (selectFn flag (isOne (qc (Nat.pair (w - 1).unpair.1 x))) 0)) l := by
      rw [List.foldl_cons]
      congr 1
      show reForallF qc (Nat.pair w flag) x = _
      unfold reForallF
      rw [unpair_pair_fst, unpair_pair_snd]
    rw [hstep]
    set flag' := selectFn flag (isOne (qc (Nat.pair (w - 1).unpair.1 x))) 0 with hflag
    'def
    have hflag'le : flag' ≤ 1 := by
      rw [hflag'def]
      rcases (show flag = 0 ∨ flag = 1 by omega) with h | h
      · rw [h, selectFn_zero]; exact Nat.zero_le 1
      · rw [h, selectFn_one]; exact isOne_le_one _
    rw [ih (w - 1).unpair.2 flag' hflag'le]
    constructor
    · rintro ⟨hf', hrest⟩
      have hsplit : flag = 1 ∧ qc (Nat.pair (w - 1).unpair.1 x) = 1 := by
        rw [hflag'def] at hf'
        rcases (show flag = 0 ∨ flag = 1 by omega) with h | h
        · rw [h, selectFn_zero] at hf'; exact absurd hf' (by decide)
        · rw [h, selectFn_one, isOne_eq_one_iff] at hf'; exact ⟨h, hf'⟩
      refine ⟨hsplit.1, fun k hk => ?_⟩
      rcases k with _ | k'
      · rw [List.getD_cons_zero, hi]; exact hsplit.2
      · rw [List.getD_cons_succ, htail]
        exact hrest k' (by simp only [List.length_cons] at hk; omega)
    · rintro ⟨hflag1, hall⟩
      have hhead : qc (Nat.pair (w - 1).unpair.1 x) = 1 := by
        have := hall 0 (by simp only [List.length_cons]; omega)
        rwa [List.getD_cons_zero, hi] at this
      refine ⟨?_, fun k hk => ?_⟩
      · rw [hflag'def, hflag1, selectFn_one, isOne_eq_one_iff]; exact hhead
      · have := hall (k + 1) (by simp only [List.length_cons]; omega)
        rwa [List.getD_cons_succ, htail] at this

theorem reForallChar_eq_one_iff (qc : ℕ → ℕ) (w c : ℕ) :
    reForallChar qc w c = 1 ↔
      ∀ k, k < (decodeList c).length →
        qc (Nat.pair ((decodeList w).getD k 0) ((decodeList c).getD k 0)) = 1 := by
  rw [reForallChar_eq, reForallF_foldl_eq_one_iff qc (decodeList c) w 1 (Nat.le_refl
    1)]
  simp only [true_and]

theorem primrec_reForallStp {qc : ℕ → ℕ} (hqc : Nat.Primrec qc) :
    Nat.Primrec (reForallStp qc) := by
  have hx : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hacc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
```

```
    Nat.Primrec.left.comp Nat.Primrec.right
  have hrw : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1.unpair.1) :=
    Nat.Primrec.left.comp hacc
  have hflag : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1.unpair.2) :=
    Nat.Primrec.right.comp hacc
  have hpm : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1.unpair.1 - 1) :=
    primrec_sub₂ hrw (Nat.Primrec.const 1)
  have hi : Nat.Primrec (fun w : ℕ => (w.unpair.2.unpair.1.unpair.1 - 1).unpair.1) :=
    Nat.Primrec.left.comp hpm
  have hrw' : Nat.Primrec (fun w : ℕ => (w.unpair.2.unpair.1.unpair.1 - 1).unpair.2)
    :=
    Nat.Primrec.right.comp hpm
  have hcall : Nat.Primrec (fun w : ℕ =>
      qc (Nat.pair (w.unpair.2.unpair.1.unpair.1 - 1).unpair.1 w.unpair.1)) :=
    hqc.comp (hi.pair hx)
  have hB : Nat.Primrec (fun w : ℕ =>
      selectFn w.unpair.2.unpair.1.unpair.2
        (isOne (qc (Nat.pair (w.unpair.2.unpair.1.unpair.1 - 1).unpair.1 w.unpair.1)))
     0) :=
    primrec_selectFn hflag (primrec_isOne.comp hcall) (Nat.Primrec.const 0)
  exact (hrw'.pair hB).of_eq (fun _ => rfl)

theorem primrec_reForallChar {qc : ℕ → ℕ} (hqc : Nat.Primrec qc) :
    Nat.Primrec (fun t => reForallChar qc t.unpair.1 t.unpair.2) := by
  have hfold := primrec_foldCode (primrec_reForallStp hqc) (Nat.Primrec.const 0)
    (Nat.Primrec.left.pair (Nat.Primrec.const 1)) Nat.Primrec.right
  exact (Nat.Primrec.right.comp hfold).of_eq (fun _ => rfl)

theorem REPred.forall_mem_decodeList {p : ℕ → Prop} (hp : REPred p) :
    REPred (fun c => ∀ e ∈ decodeList c, p e) := by
  obtain ⟨q, hq, hqe⟩ := hp
  obtain ⟨qc, hqcp, hqcs⟩ := hq

  have hpe : ∀ e, p e ↔ ∃ j, qc (Nat.pair j e) = 1 := by
    intro e; rw [hqe e]; exact exists_congr (fun j => hqcs (Nat.pair j e))

  have hmemgetD : ∀ (l : List ℕ) (e : ℕ), e ∈ l → ∃ k, k < l.length ∧ l.getD k 0 = e
    := by
    intro l
    induction l with
    | nil => intro e he; cases he
    | cons a l ih =>
      intro e he
      rcases List.mem_cons.mp he with rfl | he'
      · exact ⟨0, by simp only [List.length_cons]; omega, by rw [List.getD_cons_zero]⟩
      · obtain ⟨k, hk, hek⟩ := ih e he'
        exact ⟨k + 1, by simp only [List.length_cons]; omega, by rw [List.
    getD_cons_succ]; exact hek⟩
  refine ⟨fun t => reForallChar qc t.unpair.1 t.unpair.2 = 1,
    ⟨fun t => reForallChar qc t.unpair.1 t.unpair.2, primrec_reForallChar hqcp,
      fun _ => Iff.rfl⟩, fun c => ?_⟩
  simp only [unpair_pair_fst, unpair_pair_snd]
  constructor
  · intro hall

    have hwit : ∀ (l : List ℕ), (∀ e ∈ l, ∃ j, qc (Nat.pair j e) = 1) →
```

```
        ∃ iws : List ℕ, ∀ k, k < l.length →
          qc (Nat.pair (iws.getD k 0) (l.getD k 0)) = 1 := by
      intro l
      induction l with
      | nil => intro _; exact ⟨[], fun k hk => absurd hk (Nat.not_lt_zero k)⟩
      | cons e l ih =>
        intro hh
        obtain ⟨j, hj⟩ := hh e (List.mem_cons.mpr (Or.inl rfl))
        obtain ⟨iws, hiws⟩ := ih (fun e' he' => hh e' (List.mem_cons.mpr (Or.inr he')))
        refine ⟨j :: iws, fun k hk => ?_⟩
        rcases k with _ | k'
        · rw [List.getD_cons_zero, List.getD_cons_zero]; exact hj
        · rw [List.getD_cons_succ, List.getD_cons_succ]
          exact hiws k' (by simp only [List.length_cons] at hk; omega)
    obtain ⟨iws, hiws⟩ := hwit (decodeList c) (fun e he => (hpe e).mp (hall e he))
    refine ⟨encodeList iws, (reForallChar_eq_one_iff qc _ c).mpr (fun k hk => ?_)⟩
    rw [decodeList_encodeList]; exact hiws k hk
  · rintro ⟨w, hw⟩
    rw [reForallChar_eq_one_iff] at hw
    intro e he
    obtain ⟨k, hk, hek⟩ := hmemgetD (decodeList c) e he
    rw [hpe e]
    refine ⟨(decodeList w).getD k 0, ?_⟩
    have := hw k hk
    rwa [hek] at this

theorem lowOr_eq_mod (x y : ℕ) : lowOr x y = (x ||| y) % 2 := by
  have key : ((x ||| y) % 2 = 1) ↔ (x % 2 = 1 ∨ y % 2 = 1) := by
    have hb := Nat.testBit_lor x y 0
    rw [Nat.testBit_zero, Nat.testBit_zero, Nat.testBit_zero] at hb
    rw [← decide_eq_decide, hb, Bool.decide_or]
  have e1 : (x ||| y) % 2 < 2 := Nat.mod_lt _ (by decide)
  unfold lowOr

  rcases Nat.mod_two_eq_zero_or_one x with hx | hx <;>
    rcases Nat.mod_two_eq_zero_or_one y with hy | hy <;> rw [hx, hy]
  .
    have hne : (x ||| y) % 2 = 1 := fun h => by rcases key.mp h with h' | h' <;> omega
    omega
  .
    rw [key.mpr (Or.inr hy)]
  .
    rw [key.mpr (Or.inl hx)]
  .
    rw [key.mpr (Or.inl hx)]

theorem lor_low_rec (x y : ℕ) : x ||| y = 2 * (x / 2 ||| y / 2) + lowOr x y := by
  have hdiv : (x ||| y) / 2 = x / 2 ||| y / 2 := by
    apply Nat.eq_of_testBit_eq
    intro i
    rw [← Nat.testBit_add_one, Nat.testBit_lor, Nat.testBit_lor, Nat.testBit_add_one,
      Nat.testBit_add_one]
  have hmod := lowOr_eq_mod x y
  conv_lhs => rw [← Nat.div_add_mod (x ||| y) 2]
  rw [hdiv, hmod]
```

```
theorem lorStep_iter_spec (a b : ℕ) : ∀ k,
    (lorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.unpair.1 = a / 2 ^
     k ∧
    (lorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.unpair.2 = b / 2 ^
     k ∧
    (lorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.1 = 2 ^ k ∧
    (lorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.2 +
        2 ^ k * (a / 2 ^ k ||| b / 2 ^ k) = a ||| b := by
  intro k
  induction k with
  | zero =>
    simp only [Function.iterate_zero_apply, unpair_pair_fst, unpair_pair_snd, pow_zero
    ,
      Nat.div_one, Nat.one_mul, Nat.zero_add, true_and]
  | succ k ih =>
    obtain ⟨hA, hB, hW, hAcc⟩ := ih
    rw [Function.iterate_succ_apply']
    have hdd : a / 2 ^ (k + 1) = (a / 2 ^ k) / 2 := by rw [Nat.div_div_eq_div_mul, ←
    pow_succ]
    have hdd' : b / 2 ^ (k + 1) = (b / 2 ^ k) / 2 := by rw [Nat.div_div_eq_div_mul, ←
    pow_succ]

    have p11 : (lorStep (lorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0)))).unpair
    .1.unpair.1
        = (lorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.unpair.1 / 2
     := by
      unfold lorStep; rw [unpair_pair_fst, unpair_pair_fst]
    have p12 : (lorStep (lorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0)))).unpair
    .1.unpair.2
        = (lorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.unpair.2 / 2
     := by
      unfold lorStep; rw [unpair_pair_fst, unpair_pair_snd]
    have p21 : (lorStep (lorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0)))).unpair
    .2.unpair.1
        = 2 * (lorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.1
     := by
      unfold lorStep; rw [unpair_pair_snd, unpair_pair_fst]
    have p22 : (lorStep (lorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0)))).unpair
    .2.unpair.2
        = (lorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.2
          + (lorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.1
            * lowOr (lorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.
    unpair.1
                (lorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.unpair
    .2 := by
      unfold lorStep; rw [unpair_pair_snd, unpair_pair_snd]
    refine ⟨?_, ?_, ?_, ?_⟩
    · rw [p11, hA, Nat.div_div_eq_div_mul, ← pow_succ]
    · rw [p12, hB, Nat.div_div_eq_div_mul, ← pow_succ]
    · rw [p21, hW, ← pow_succ']
    · rw [p22, hA, hB, hW, hdd, hdd', pow_succ, ← hAcc, lor_low_rec (a / 2 ^ k) (b / 2
     ^ k)]
      ring

theorem myLor_eq_lor (a b : ℕ) : myLor a b = a ||| b := by
  unfold myLor
```

```
  obtain ⟨_, _, _, hAcc⟩ := lorStep_iter_spec a b (a + b)
  have ha0 : a / 2 ^ (a + b) = 0 :=
    Nat.div_eq_of_lt (Nat.lt_of_lt_of_le Nat.lt_two_pow_self (Nat.pow_le_pow_right (by
     decide)
       (Nat.le_add_right a b)))
  have hb0 : b / 2 ^ (a + b) = 0 :=
    Nat.div_eq_of_lt (Nat.lt_of_lt_of_le Nat.lt_two_pow_self (Nat.pow_le_pow_right (by
     decide)
       (Nat.le_add_left b a)))
  rw [ha0, hb0] at hAcc
  simpa using hAcc

theorem allListStp_eq (g : ℕ → ℕ) (acc x p : ℕ) :
    allListStp g (Nat.pair x (Nat.pair acc p)) = selectFn acc (isOne (g (Nat.pair x p)
    )) 0 := by
  unfold allListStp; simp only [unpair_pair_fst, unpair_pair_snd]

theorem allListChar_eq (g : ℕ → ℕ) (p c : ℕ) :
    allListChar g p c
      = List.foldl (fun acc x => selectFn acc (isOne (g (Nat.pair x p))) 0) 1 (
    decodeList c) := by
  have hfun : (fun (acc x : ℕ) => allListStp g (Nat.pair x (Nat.pair acc p)))
      = (fun acc x => selectFn acc (isOne (g (Nat.pair x p))) 0) := by
    funext acc x; exact allListStp_eq g acc x p
  unfold allListChar; rw [foldCode_eq', hfun]

theorem allList_foldl_eq_one_iff (g : ℕ → ℕ) (p : ℕ) :
    ∀ (l : List ℕ) (acc : ℕ), acc ≤ 1 →
      (List.foldl (fun acc x => selectFn acc (isOne (g (Nat.pair x p))) 0) acc l = 1 ↔
        acc = 1 ∧ ∀ x ∈ l, g (Nat.pair x p) = 1) := by
  intro l
  induction l with
  | nil => intro acc _; simp only [List.foldl_nil, List.not_mem_nil, false_implies,
    implies_true,
      and_true]
  | cons x l ih =>
    intro acc hacc
    rw [List.foldl_cons]
    set acc' := selectFn acc (isOne (g (Nat.pair x p))) 0 with hacc'
    have hacc'le : acc' ≤ 1 := by
      rw [hacc']
      rcases (show acc = 0 ∨ acc = 1 by omega) with h | h
      · rw [h, selectFn_zero]; exact Nat.zero_le 1
      · rw [h, selectFn_one]; exact isOne_le_one _
    rw [ih acc' hacc'le]
    constructor
    · rintro ⟨hacc'1, hrest⟩
      have hsplit : acc = 1 ∧ g (Nat.pair x p) = 1 := by
        rw [hacc'] at hacc'1
        rcases (show acc = 0 ∨ acc = 1 by omega) with h | h
        · rw [h, selectFn_zero] at hacc'1; exact absurd hacc'1 (by decide)
        · rw [h, selectFn_one, isOne_eq_one_iff] at hacc'1; exact ⟨h, hacc'1⟩
      refine ⟨hsplit.1, fun y hy => ?_⟩
      rcases List.mem_cons.mp hy with rfl | hy'
      · exact hsplit.2
      · exact hrest y hy'
```

```
    · rintro ⟨hacc1, hall⟩
      have hhead : g (Nat.pair x p) = 1 := hall x (List.mem_cons.mpr (Or.inl rfl))
      refine ⟨?_, fun y hy => hall y (List.mem_cons.mpr (Or.inr hy))⟩
      rw [hacc', hacc1, selectFn_one, isOne_eq_one_iff]; exact hhead

theorem allListChar_eq_one_iff (g : ℕ → ℕ) (p c : ℕ) :
    allListChar g p c = 1 ↔ ∀ x ∈ decodeList c, g (Nat.pair x p) = 1 := by
  rw [allListChar_eq, allList_foldl_eq_one_iff g p (decodeList c) 1 (Nat.le_refl 1)]
  simp only [true_and]

theorem allListChar_le_one (g : ℕ → ℕ) (p c : ℕ) : allListChar g p c ≤ 1 := by
  have h : ∀ (l : List ℕ) (z : ℕ), z ≤ 1 →
      List.foldl (fun acc x => allListStp g (Nat.pair x (Nat.pair acc p))) z l ≤ 1 :=
    by
    intro l
    induction l with
    | nil => intro z hz; simpa using hz
    | cons x xs ih =>
      intro z hz
      simp only [List.foldl_cons]
      apply ih
      rw [allListStp_eq]
      rcases (show z = 0 ∨ z = 1 by omega) with h0 | h1
      · rw [h0, selectFn_zero]; exact Nat.zero_le 1
      · rw [h1, selectFn_one]; exact isOne_le_one _
  unfold allListChar
  rw [foldCode_eq']
  exact h (decodeList c) 1 (le_refl 1)

theorem primrec_allListStp {g : ℕ → ℕ} (hg : Nat.Primrec g) : Nat.Primrec (allListStp
    g) := by
  have hacc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hx : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hp : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hcall : Nat.Primrec (fun w : ℕ => isOne (g (Nat.pair w.unpair.1 w.unpair.2.
    unpair.2))) :=
    primrec_isOne.comp (hg.comp (hx.pair hp))
  exact (primrec_selectFn hacc hcall (Nat.Primrec.const 0)).of_eq fun _ => rfl

theorem isBinDigit_eq_one_iff (n : ℕ) : isBinDigit n = 1 ↔ n = 0 ∨ n = 1 := by
  unfold isBinDigit selectFn isOne
  match n with | 0 | 1 => simp | n + 2 => simp

theorem primrec_isBinDigit : Nat.Primrec isBinDigit := by
  have h01 := primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 1) primrec_id)
  have h12 := primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 2) primrec_id)
  refine (primrec_selectFn h01 (Nat.Primrec.const 1)
    (primrec_selectFn h12 (Nat.Primrec.const 1) (Nat.Primrec.const 0))).of_eq fun _ =>
    rfl

theorem allBinDigitsChar_eq_one_iff (c : ℕ) :
    allBinDigitsChar c = 1 ↔ ∀ x ∈ decodeList c, x = 0 ∨ x = 1 := by
  unfold allBinDigitsChar
  rw [allListChar_eq_one_iff]
```

```
  simp [isBinDigit_eq_one_iff]

theorem allBinDigitsChar_le_one (c : ℕ) : allBinDigitsChar c ≤ 1 := by
  unfold allBinDigitsChar; exact allListChar_le_one _ _ _

set_option maxHeartbeats 800000 in
theorem primrec_allBinDigitsChar : Nat.Primrec allBinDigitsChar := by
  unfold allBinDigitsChar
  exact (primrec_foldCode (primrec_allListStp (primrec_isBinDigit.comp Nat.Primrec.
    left))
    (Nat.Primrec.const 0) (Nat.Primrec.const 1) primrec_id).of_eq fun _ => rfl

theorem nthStp_val (i x s r : ℕ) :
    nthStp (Nat.pair x (Nat.pair (Nat.pair s r) i))
      = Nat.pair (s + 1) (selectFn (1 - ((s - i) + (i - s))) x r) := by
  unfold nthStp; simp only [unpair_pair_fst, unpair_pair_snd]

theorem nthCode_foldl (i : ℕ) : ∀ (l : List ℕ) (s r : ℕ),
    (List.foldl (fun acc x => nthStp (Nat.pair x (Nat.pair acc i))) (Nat.pair s r) l).
    unpair.2
      = if i < s then r else l.getD (i - s) r := by
  intro l
  induction l with
  | nil => intro s r; simp only [List.foldl_nil, unpair_pair_snd, List.getD_nil];
    split <;> rfl
  | cons x l ih =>
    intro s r
    rw [List.foldl_cons, nthStp_val, ih (s + 1) (selectFn (1 - ((s - i) + (i - s))) x
    r)]
    by_cases h : i = s
    · subst h
      have he : (1 : ℕ) - ((i - i) + (i - i)) = 1 := by omega
      rw [he, selectFn_one, ite_eq_right (lt_irrefl i), ite_eq_left (Nat.lt_succ_self
    i), Nat.sub_self,
        List.getD_cons_zero]
    · by_cases h2 : i < s
      · have he : (1 : ℕ) - ((s - i) + (i - s)) = 0 := by omega
        rw [he, selectFn_zero, ite_eq_left h2, ite_eq_left (Nat.lt_succ_of_lt h2)]
      · have he : (1 : ℕ) - ((s - i) + (i - s)) = 0 := by omega
        rw [he, selectFn_zero, ite_eq_right h2, ite_eq_right (show ¬ i < s + 1 by
    omega),
          show i - s = (i - (s + 1)) + 1 by omega, List.getD_cons_succ]

theorem nthCode_eq (c i d : ℕ) : nthCode c i d = (decodeList c).getD i d := by
  unfold nthCode
  rw [foldCode_eq']
  have h := nthCode_foldl i (decodeList c) 0 d
  rw [ite_eq_right (Nat.not_lt_zero i), Nat.sub_zero] at h
  exact h

theorem primrec_nthStp : Nat.Primrec nthStp := by
  have hcount : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1.unpair.1) :=
    Nat.Primrec.left.comp (Nat.Primrec.left.comp Nat.Primrec.right)
  have hi : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hx : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
```

```
  have hres : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1.unpair.2) :=
    Nat.Primrec.right.comp (Nat.Primrec.left.comp Nat.Primrec.right)
  have hbit : Nat.Primrec (fun w : ℕ => 1 - ((w.unpair.2.unpair.1.unpair.1 - w.unpair
    .2.unpair.2)
      + (w.unpair.2.unpair.2 - w.unpair.2.unpair.1.unpair.1))) :=
    primrec_sub₂ (Nat.Primrec.const 1)
      (primrec_add₂ (primrec_sub₂ hcount hi) (primrec_sub₂ hi hcount))
  exact ((Nat.Primrec.succ.comp hcount).pair (primrec_selectFn hbit hx hres)).of_eq
    fun _ => rfl

theorem primrec_nthCode : Nat.Primrec
    (fun t => nthCode t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair.2) := by
  have hfold := primrec_foldCode primrec_nthStp (Nat.Primrec.left.comp Nat.Primrec.
    right)
    ((Nat.Primrec.const 0).pair (Nat.Primrec.right.comp Nat.Primrec.right)) Nat.
    Primrec.left
  exact (Nat.Primrec.right.comp hfold).of_eq fun _ => rfl

theorem tabStep_val (g : ℕ → ℕ) (a y IH : ℕ) :
    tabStep g (Nat.pair a (Nat.pair y IH))
      = Nat.pair (g (Nat.pair (a.unpair.1 - 1 - y) a.unpair.2)) IH + 1 := by
  unfold tabStep; simp only [unpair_pair_fst, unpair_pair_snd]

theorem decodeList_tabCode_aux (g : ℕ → ℕ) (B p : ℕ) :

    ∀ K, K ≤ B → decodeList (Nat.rec (motive := fun _ => ℕ) 0
        (fun y IH => tabStep g (Nat.pair (Nat.pair B p) (Nat.pair y IH))) K)
      = (List.range' (B - K) K).map (fun j => g (Nat.pair j p)) := by
  intro K
  induction K with
  | zero => intro _; simp [decodeList_zero]
  | succ K ih =>
    intro hK
    have hKB : K ≤ B := Nat.le_of_succ_le hK
    show decodeList (tabStep g (Nat.pair (Nat.pair B p) (Nat.pair K
      (Nat.rec (motive := fun _ => ℕ) 0
        (fun y IH => tabStep g (Nat.pair (Nat.pair B p) (Nat.pair y IH))) K)))) = _
    rw [tabStep_val]
    simp only [unpair_pair_fst, unpair_pair_snd]
    rw [decodeList_succ, unpair_pair_fst, unpair_pair_snd, ih hKB,
      show B - (K + 1) = B - 1 - K by omega, List.range'_succ, List.map_cons,
      show B - 1 - K + 1 = B - K by omega]

theorem decodeList_tabCode (g : ℕ → ℕ) (B p : ℕ) :
    decodeList (tabCode g (Nat.pair B p) B) = (List.range B).map (fun j => g (Nat.pair
     j p)) := by
  have h := decodeList_tabCode_aux g B p B (le_refl B)
  rw [Nat.sub_self, ← List.range_eq_range'] at h
  exact h

theorem getD_eq_getElem_cf {β : Type*} (l : List β) (d : β) :
    ∀ {n : ℕ} (h : n < l.length), l.getD n d = l[n] := by
  induction l with
  | nil => intro n h; exact absurd h (Nat.not_lt_zero n)
  | cons a t ih =>
    intro n h
```

```
    cases n with
    | zero => rw [List.getD_cons_zero, List.getElem_cons_zero]
    | succ m => rw [List.getD_cons_succ, List.getElem_cons_succ]; exact ih _

theorem getD_eq_default_cf {β : Type*} (l : List β) (d : β) :
    ∀ {n : ℕ}, l.length ≤ n → l.getD n d = d := by
  induction l with
  | nil => intro n _; exact List.getD_nil
  | cons a t ih =>
    intro n h
    cases n with
    | zero => exact absurd h (by rw [List.length_cons]; exact Nat.not_succ_le_zero _)
    | succ m => rw [List.getD_cons_succ]; exact ih (by rw [List.length_cons] at h;
    omega)

theorem getD_map_range_cf {β : Type*} (h : ℕ → β) (d : β) {B i : ℕ} (hi : i < B) :
    ((List.range B).map h).getD i d = h i := by
  have hlen : ((List.range B).map h).length = B := by rw [List.length_map, List.
    length_range]
  rw [getD_eq_getElem_cf _ d (by rw [hlen]; exact hi), List.getElem_map, List.
    getElem_range]

theorem tabCode_nth_lt {g : ℕ → ℕ} {B p i : ℕ} (hi : i < B) (d : ℕ) :
    nthCode (tabCode g (Nat.pair B p) B) i d = g (Nat.pair i p) := by
  rw [nthCode_eq, decodeList_tabCode, getD_map_range_cf]; exact hi

theorem tabCode_nth_ge {g : ℕ → ℕ} {B p i : ℕ} (hi : B ≤ i) (d : ℕ) :
    nthCode (tabCode g (Nat.pair B p) B) i d = d := by
  rw [nthCode_eq, decodeList_tabCode, getD_eq_default_cf]
  rw [List.length_map, List.length_range]; exact hi

theorem primrec_tabStep {g : ℕ → ℕ} (hg : Nat.Primrec g) : Nat.Primrec (tabStep g) :=
     by
  have hB : Nat.Primrec (fun w : ℕ => w.unpair.1.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.left
  have hp : Nat.Primrec (fun w : ℕ => w.unpair.1.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.left
  have hk : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hih : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hidx : Nat.Primrec (fun w : ℕ => w.unpair.1.unpair.1 - 1 - w.unpair.2.unpair.1)
     :=
    primrec_sub₂ (primrec_sub₂ hB (Nat.Primrec.const 1)) hk
  exact (Nat.Primrec.succ.comp ((hg.comp (hidx.pair hp)).pair hih)).of_eq fun _ => rfl

theorem primrec_tabCode {g : ℕ → ℕ} (hg : Nat.Primrec g) :
    Nat.Primrec (fun t => tabCode g t.unpair.1 t.unpair.2) :=
  (Nat.Primrec.prec (Nat.Primrec.const 0) (primrec_tabStep hg)).of_eq fun t => by
    simp only [Nat.unpaired]; rfl

theorem primrec_tagCase4 {f0 f1 f2 f3 fdef : ℕ → ℕ}
    (hf0 : Nat.Primrec f0) (hf1 : Nat.Primrec f1) (hf2 : Nat.Primrec f2) (hf3 : Nat.
    Primrec f3)
    (hfdef : Nat.Primrec fdef) :
    Nat.Primrec (fun e =>
```

```
      let t := e.unpair.1
      selectFn (isOne (1 - t)) (f0 e)
        (selectFn (isOne (2 - t)) (f1 e)
          (selectFn (isOne (3 - t)) (f2 e)
            (selectFn (isOne (4 - t)) (f3 e) (fdef e))))) := by
  have ht : Nat.Primrec (fun e => e.unpair.1) := Nat.Primrec.left
  have h01 : Nat.Primrec (fun e => isOne (1 - e.unpair.1)) :=
    primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 1) ht)
  have h12 : Nat.Primrec (fun e => isOne (2 - e.unpair.1)) :=
    primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 2) ht)
  have h23 : Nat.Primrec (fun e => isOne (3 - e.unpair.1)) :=
    primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 3) ht)
  have h34 : Nat.Primrec (fun e => isOne (4 - e.unpair.1)) :=
    primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 4) ht)
  refine (primrec_selectFn h01 hf0
    (primrec_selectFn h12 hf1
      (primrec_selectFn h23 hf2
        (primrec_selectFn h34 hf3 hfdef)))).of_eq fun e => rfl

theorem mulBit_eq_one_iff (a b : ℕ) : mulBit a b = 1 ↔ a = 1 ∧ b = 1 := by
  simp [mulBit]

theorem mulBit_le_one {a b : ℕ} (ha : a ≤ 1) (hb : b ≤ 1) : mulBit a b ≤ 1 := by
  unfold mulBit
  rcases (show a = 0 ∨ a = 1 by omega) with rfl | rfl <;>
    rcases (show b = 0 ∨ b = 1 by omega) with rfl | rfl <;> simp

theorem primrec_mulBit : Nat.Primrec (fun t => mulBit t.unpair.1 t.unpair.2) :=
  primrec_mul₂ Nat.Primrec.left Nat.Primrec.right

theorem decodeFuelOkCharBody_eq (prev : ℕ → ℕ) (c : ℕ) :
    decodeFuelOkCharBody prev c =
      match c.unpair.1 with
      | 0 => selectFn (isOne (1 - c.unpair.2)) 1 0
      | 1 => allBinDigitsChar c.unpair.2
      | 2 | 3 => mulBit (prev c.unpair.2.unpair.1) (prev c.unpair.2.unpair.2)
      | _ => 0 := by
  unfold decodeFuelOkCharBody mulBit
  match tag : c.unpair.1 with
  | 0 =>
    have h10 : (1 - 0 : ℕ) = 1 := rfl
    simp only [h10, isOne_one, selectFn_one]
  | 1 =>
    have h01 : (1 - 1 : ℕ) = 0 := rfl
    have h12 : (2 - 1 : ℕ) = 1 := rfl
    simp only [h01, h12, isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | 2 =>
    have h01 : (1 - 2 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h12 : (2 - 2 : ℕ) = 0 := rfl
    have h23 : (3 - 2 : ℕ) = 1 := rfl
    simp only [h01, h23, isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | 3 =>
    have h01 : (1 - 3 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h12 : (2 - 3 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h23 : (3 - 3 : ℕ) = 0 := rfl
    have h34 : (4 - 3 : ℕ) = 1 := rfl
```

```
    simp only [h01, h34, isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | t + 4 =>
    have hne1 : isOne (1 - (t + 4)) = 0 := isOne_of_ne_one (by omega)
    have hne2 : isOne (2 - (t + 4)) = 0 := isOne_of_ne_one (by omega)
    have hne3 : isOne (3 - (t + 4)) = 0 := isOne_of_ne_one (by omega)
    have hne4 : isOne (4 - (t + 4)) = 0 := isOne_of_ne_one (by omega)
    simp only [hne1, hne2, hne3, hne4, selectFn_zero]

theorem primrec_decodeFuelOkCharBody {prev : ℕ → ℕ} (hprev : Nat.Primrec prev) :
    Nat.Primrec (fun c => decodeFuelOkCharBody prev c) := by
  unfold decodeFuelOkCharBody
  have hleft : Nat.Primrec (fun c => prev c.unpair.2.unpair.1) :=
    (hprev.comp (Nat.Primrec.left.comp Nat.Primrec.right)).of_eq fun c => by
      simp only
  have hright : Nat.Primrec (fun c => prev c.unpair.2.unpair.2) :=
    (hprev.comp (Nat.Primrec.right.comp Nat.Primrec.right)).of_eq fun c => by
      simp only
  have hsub : Nat.Primrec (fun c => mulBit (prev c.unpair.2.unpair.1) (prev c.unpair
    .2.unpair.2)) :=
    primrec_mul₂ hleft hright
  have hf0 : Nat.Primrec (fun c => selectFn (isOne (1 - c.unpair.2)) 1 0) :=
    primrec_selectFn
      (primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 1) Nat.Primrec.right))
      (Nat.Primrec.const 1) (Nat.Primrec.const 0)
  have hf1 : Nat.Primrec (fun c => allBinDigitsChar c.unpair.2) :=
    primrec_allBinDigitsChar.comp Nat.Primrec.right
  exact primrec_tagCase4 hf0 hf1 hsub hsub (Nat.Primrec.const 0)

theorem decodeFuelOkCharBody_local (f g : ℕ → ℕ) (c : ℕ) (h : ∀ c' ≤ c, f c' = g c')
    :
    decodeFuelOkCharBody f c = decodeFuelOkCharBody g c := by
  rw [decodeFuelOkCharBody_eq, decodeFuelOkCharBody_eq]
  have h1 : c.unpair.2.unpair.1 ≤ c := le_trans (unpair_left_le c.unpair.2) (
    unpair_snd_le c)
  have h2 : c.unpair.2.unpair.2 ≤ c := le_trans (unpair_snd_le c.unpair.2) (
    unpair_snd_le c)
  rw [h _ h1, h _ h2]

theorem listLenStp_eq (acc x p : ℕ) :
    listLenStp (Nat.pair x (Nat.pair acc p)) = acc + 1 := by
  unfold listLenStp; simp only [unpair_pair_fst, unpair_pair_snd]

theorem listLenChar_eq (c : ℕ) : listLenChar c = (decodeList c).length := by
  have hfun : (fun acc x => listLenStp (Nat.pair x (Nat.pair acc 0))) = fun acc _ =>
    acc + 1 := by
    funext acc x; simp [listLenStp_eq]
  have hfold : ∀ (k : ℕ) (l : List ℕ),
      List.foldl (fun acc _ => acc + 1) k l = k + l.length := by
    intro k l
    induction l generalizing k with
    | nil => simp
    | cons _ xs ih => simp [List.foldl_cons, ih, List.length_cons]; omega
  unfold listLenChar
  rw [foldCode_eq', hfun]
  simp [hfold]
```

```
theorem primrec_listLenStp : Nat.Primrec listLenStp :=
  primrec_add₂ (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 1)

theorem primrec_listLenChar : Nat.Primrec listLenChar := by
  unfold listLenChar
  exact (primrec_foldCode primrec_listLenStp (Nat.Primrec.const 0) (Nat.Primrec.const
    0)
    primrec_id).of_eq fun _ => rfl

theorem natEqChar_le_one (a b : ℕ) : natEqChar a b ≤ 1 := by unfold natEqChar; omega

theorem natEqChar_eq_zero_or_one (a b : ℕ) : natEqChar a b = 0 ∨ natEqChar a b = 1 :=
    by
  unfold natEqChar; omega

theorem primrec_natEqChar : Nat.Primrec (fun t => natEqChar t.unpair.1 t.unpair.2) :=
  (primrec_sub₂ (Nat.Primrec.const 1)
    (primrec_add₂ (primrec_sub₂ Nat.Primrec.left Nat.Primrec.right)
      (primrec_sub₂ Nat.Primrec.right Nat.Primrec.left))).of_eq fun _ => rfl

theorem listEqStp_acc (flag rem x : ℕ) :
    listEqStp (Nat.pair x (Nat.pair (Nat.pair flag rem) 0)) =
      selectFn (isZero rem) (Nat.pair 0 0)
        (Nat.pair (selectFn flag (natEqChar x ((rem - 1).unpair.1)) 0) ((rem - 1).
    unpair.2)) := by
  unfold listEqStp listEqStpNonzero
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem decodeList_eq_nil_iff (c : ℕ) : decodeList c = [] ↔ c = 0 := by
  constructor
  · intro h
    have := congrArg encodeList h
    rwa [encodeList, encodeList_decodeList] at this
  · intro hc; simp [hc, decodeList_zero]

private theorem selectFn_eq_one_iff_zero {a b : ℕ} (ha : a = 0 ∨ a = 1) :
    selectFn a b 0 = 1 ↔ a = 1 ∧ b = 1 := by
  rcases ha with ha | ha <;> simp [selectFn, ha]

private theorem listEqStep_zero (flag x : ℕ) :
    listEqStep (Nat.pair flag 0) x = Nat.pair 0 0 := by
  simp [listEqStep, listEqStp_acc, isZero, min]

private theorem listEqStep_succ (flag x m : ℕ) :
    listEqStep (Nat.pair flag (m + 1)) x =
      Nat.pair (selectFn flag (natEqChar x m.unpair.1) 0) m.unpair.2 := by
  unfold listEqStep listEqStp listEqStpNonzero
  simp only [unpair_pair_fst, unpair_pair_snd]
  have hzero : isZero (m + 1) = 0 := by
    unfold isZero; simp
  rw [hzero, selectFn_zero, Nat.add_sub_cancel]

private theorem listEq_foldl_zero (flag x : ℕ) (xs : List ℕ) :
    (List.foldl listEqStep (Nat.pair flag 0) (x :: xs)).unpair.1 = 0 := by
  rw [List.foldl_cons, listEqStep_zero]
  induction xs with
```

```
  | nil => simp [List.foldl_nil]
  | cons y ys ih =>
    rw [List.foldl_cons, listEqStep_zero, ih]

private theorem listEq_foldl_end_iff (l1 : List ℕ) (flag rem : ℕ) (hflag : flag = 0 ∨
    flag = 1) :
    (let r := List.foldl listEqStep (Nat.pair flag rem) l1
     r.unpair.1 = 1 ∧ isZero r.unpair.2 = 1) ↔
      flag = 1 ∧ l1 = decodeList rem := by
  induction l1 generalizing flag rem with
  | nil =>
    simp only [List.foldl_nil, unpair_pair_fst, unpair_pair_snd]
    constructor
    · intro ⟨hflag', hrem0⟩
      have hrem0' : rem = 0 := (isZero_eq_one_iff rem).1 hrem0
      exact ⟨hflag', ((decodeList_eq_nil_iff rem).2 hrem0').symm⟩
    · intro ⟨hflag', heq⟩
      exact ⟨hflag', (isZero_eq_one_iff rem).2 ((decodeList_eq_nil_iff rem).1 heq.symm)
    ⟩
  | cons x xs ih =>
    by_cases hrem : rem = 0
    · subst hrem
      simp only [decodeList_zero]
      constructor
      · intro ⟨h1, _⟩
        have h0 : (let r := List.foldl listEqStep (Nat.pair flag 0) (x :: xs); r.
    unpair.1) = 0 := by
          show (List.foldl listEqStep (Nat.pair flag 0) (x :: xs)).unpair.1 = 0
          exact listEq_foldl_zero flag x xs
        rw [h0] at h1
        exact absurd h1 (by decide)
      · intro h
        cases h.2
    · rcases rem with _ | m
      · omega
      · set acc' := selectFn flag (natEqChar x m.unpair.1) 0 with hacc'
        have hacc01 : acc' = 0 ∨ acc' = 1 := by
          rcases hflag with h | h
          · left; rw [hacc', h, selectFn_zero]
          · have hz := natEqChar_eq_zero_or_one x m.unpair.1
            rw [hacc', h, selectFn_one]
            rcases hz with hz0 | hz1
            · exact Or.inl hz0
            · exact Or.inr hz1
        rw [List.foldl_cons, listEqStep_succ, ih acc' m.unpair.2 hacc01,
    decodeList_succ]
        constructor
        · intro ⟨hacc'1, hxs⟩
          have hsel : selectFn flag (natEqChar x m.unpair.1) 0 = 1 := hacc'.trans hacc
    '1
          rcases (selectFn_eq_one_iff_zero hflag).1 hsel with ⟨hflag1, hxeq⟩
          rw [natEqChar_eq_one_iff] at hxeq
          exact ⟨hflag1, by rw [hxeq, hxs]⟩
        · intro ⟨hflag1, heq⟩
          rcases List.cons.inj heq with ⟨hx, hxs⟩
          refine ⟨hacc'.trans ((selectFn_eq_one_iff_zero hflag).2 ⟨hflag1, by
```

```
            rw [natEqChar_eq_one_iff, hx])), hxs⟩

theorem listEqChar_eq_one_iff (c1 c2 : ℕ) :
    listEqChar c1 c2 = 1 ↔ decodeList c1 = decodeList c2 := by
  unfold listEqChar
  rw [foldCode_eq', show (fun acc x => listEqStp (Nat.pair x (Nat.pair acc 0))) =
    listEqStep from rfl,
    mulBit_eq_one_iff]
  exact (listEq_foldl_end_iff (decodeList c1) 1 c2 (Or.inr rfl)).trans (by simp)

private theorem listEq_foldl_flag_le_one : ∀ (l : List ℕ) (z : ℕ), z.unpair.1 ≤ 1 →
    (List.foldl listEqStep z l).unpair.1 ≤ 1 := by
  intro l
  induction l with
  | nil => intro z hz; exact hz
  | cons x xs ih =>
    intro z hz
    simp only [List.foldl_cons]
    apply ih
    show (listEqStp (Nat.pair x (Nat.pair z 0))).unpair.1 ≤ 1
    have hkey := listEqStp_acc z.unpair.1 z.unpair.2 x
    rw [Nat.pair_unpair] at hkey
    rw [hkey]
    rcases (show isZero z.unpair.2 = 0 ∨ isZero z.unpair.2 = 1 from by
      have := isZero_le_one z.unpair.2; omega) with h0 | h1
    · rw [h0, selectFn_zero, unpair_pair_fst]
      rcases (show z.unpair.1 = 0 ∨ z.unpair.1 = 1 from by omega) with hf0 | hf1
      · rw [hf0, selectFn_zero]; exact Nat.zero_le 1
      · rw [hf1, selectFn_one]
        have := natEqChar_le_one x (z.unpair.2 - 1).unpair.1
        omega
    · rw [h1, selectFn_one, unpair_pair_fst]; exact Nat.zero_le 1

theorem listEqChar_le_one (c1 c2 : ℕ) : listEqChar c1 c2 ≤ 1 := by
  unfold listEqChar
  rw [foldCode_eq', show (fun acc x => listEqStp (Nat.pair x (Nat.pair acc 0))) =
    listEqStep from rfl]
  exact mulBit_le_one
    (listEq_foldl_flag_le_one (decodeList c1) (Nat.pair 1 c2) (by simp))
    (isZero_le_one _)

set_option maxHeartbeats 800000 in
theorem primrec_listEqStpNonzero : Nat.Primrec listEqStpNonzero := by
  have hflag := Nat.Primrec.left.comp (Nat.Primrec.left.comp Nat.Primrec.right)
  have hrem := Nat.Primrec.right.comp (Nat.Primrec.left.comp Nat.Primrec.right)
  have hhead := Nat.Primrec.left
  have hrem1 := primrec_sub₂ hrem (Nat.Primrec.const 1)
  have hcmp := primrec_natEqChar.comp (hhead.pair (Nat.Primrec.left.comp hrem1))
  have htail := Nat.Primrec.right.comp hrem1
  exact (Nat.Primrec.pair (primrec_selectFn hflag hcmp (Nat.Primrec.const 0)) htail).
    of_eq fun w => by
    simp [listEqStpNonzero, selectFn]

set_option maxHeartbeats 800000 in
theorem primrec_listEqStp : Nat.Primrec listEqStp := by
  have hrem := Nat.Primrec.right.comp (Nat.Primrec.left.comp Nat.Primrec.right)
```

```
  have hzero := Nat.Primrec.pair (Nat.Primrec.const 0) (Nat.Primrec.const 0)
  exact (primrec_selectFn (primrec_isZero.comp hrem) hzero primrec_listEqStpNonzero).
    of_eq fun w => by
    simp [listEqStp, selectFn, isZero, min]

theorem primrec_listEqChar : Nat.Primrec (fun t => listEqChar t.unpair.1 t.unpair.2)
    := by
  have hfold := primrec_foldCode primrec_listEqStp (Nat.Primrec.const 0)
    (Nat.Primrec.pair (Nat.Primrec.const 1) Nat.Primrec.right) Nat.Primrec.left
  have hflag : Nat.Primrec (fun t =>
      (foldCode listEqStp 0 (Nat.pair 1 t.unpair.2) t.unpair.1).unpair.1) :=
    Nat.Primrec.left.comp hfold
  have hrem : Nat.Primrec (fun t =>
      (foldCode listEqStp 0 (Nat.pair 1 t.unpair.2) t.unpair.1).unpair.2) :=
    Nat.Primrec.right.comp hfold
  exact (primrec_mulBit.comp (hflag.pair (primrec_isZero.comp hrem))).of_eq fun t =>
    by
    simp [listEqChar]

theorem list_eq_of_getD {l1 l2 : List ℕ} (h : ∀ i d, l1.getD i d = l2.getD i d) : l1 =
     l2 := by
  have hlen : l1.length = l2.length := by
    rcases Nat.lt_trichotomy l1.length l2.length with hlt | heq | hgt
    · have h1 := h l1.length 1
      have h2 := h l1.length 2
      rw [getD_eq_default_cf l1 _ (Nat.le_refl _), getD_eq_getElem_cf l2 _ (by omega)]
     at h1 h2
      omega
    · exact heq
    · have h1 := h l2.length 1
      have h2 := h l2.length 2
      rw [getD_eq_getElem_cf l1 _ (by omega), getD_eq_default_cf l2 _ (Nat.le_refl _)]
     at h1 h2
      omega
  apply List.ext_getElem hlen
  intro i hi _
  have hi' : i < l2.length := by rw [← hlen]; exact hi
  rw [← getD_eq_getElem_cf l1 0 hi, ← getD_eq_getElem_cf l2 0 hi', h i 0]

theorem getD_take_cf (l : List ℕ) (n i d : ℕ) (hi : i < (l.take n).length) :
    (l.take n).getD i d = l.getD i d := by
  have hlen : i < l.length := by
    rw [List.length_take] at hi
    exact Nat.lt_of_lt_of_le hi (Nat.min_le_right n l.length)
  rw [getD_eq_getElem_cf (l.take n) d hi, getD_eq_getElem_cf l d hlen, List.
    getElem_take]

theorem getD_drop_cf (l : List ℕ) (n i d : ℕ) (hi : i < (l.drop n).length) :
    (l.drop n).getD i d = l.getD (i + n) d := by
  induction n generalizing l i d with
  | zero =>
    simp [List.drop_zero] at hi ⊢
  | succ n ih =>
    cases l with
    | nil => simp [List.drop, List.length_nil] at hi
    | cons a tl =>
```

```
      cases i with
      | zero =>
        simp [List.drop]
      | succ i =>
        simp only [List.drop]
        exact ih tl (i + 1) d (by simpa [List.length_drop] using hi)

private theorem isZero_succ_sub_len1 (i len1 : ℕ) :
    isZero ((i + 1) - len1) = 1 ↔ i < len1 := by
  unfold isZero
  constructor
  · intro h
    by_contra hge
    have hpos : 0 < (i + 1) - len1 := Nat.sub_pos_of_lt (Nat.lt_succ_of_le (Nat.
    le_of_not_gt hge))
    have hmin : min ((i + 1) - len1) 1 = 1 := Nat.min_eq_right (Nat.succ_le_iff.mpr
    hpos)
    omega
  · intro hlt
    have : (i + 1) - len1 = 0 := Nat.sub_eq_zero_iff_le.mpr (Nat.succ_le_iff.mpr hlt)
    simp [this, min]

private theorem isZero_succ_sub_len1_zero (i len1 : ℕ) (hge : len1 ≤ i) :
    isZero ((i + 1) - len1) = 0 := by
  unfold isZero
  have hpos : 0 < (i + 1) - len1 := Nat.sub_pos_of_lt (Nat.lt_succ_of_le hge)
  have hmin : min ((i + 1) - len1) 1 = 1 := Nat.min_eq_right (Nat.succ_le_iff.mpr hpos
    )
  simp [hmin]

theorem appendListTabFn_eq (c1 c2 len1 i : ℕ) :
    appendListTabFn (Nat.pair i (Nat.pair c1 (Nat.pair c2 len1))) =
      if i < len1 then
        (decodeList c1).getD i 0
      else
        (decodeList c2).getD (i - len1) 0 := by
  unfold appendListTabFn
  simp only [unpair_pair_fst, unpair_pair_snd]
  by_cases hlt : i < len1
  · rw [ite_eq_left hlt, (isZero_succ_sub_len1 i len1).2 hlt, selectFn_one, nthCode_eq]
  · rw [ite_eq_right hlt, isZero_succ_sub_len1_zero i len1 (Nat.le_of_not_gt hlt),
    selectFn_zero,
      nthCode_eq]

theorem takeCode_eq (n c : ℕ) :
    decodeList (takeCode n c) = (decodeList c).take n := by
  unfold takeCode
  rw [decodeList_tabCode, listLenChar_eq c]
  apply list_eq_of_getD
  intro i d
  by_cases hi : i < Nat.min n (decodeList c).length
  · have hic : i < (decodeList c).length := Nat.lt_of_lt_of_le hi (Nat.min_le_right n _
    )
    rw [getD_map_range_cf (fun j => takeListTabFn (Nat.pair j (Nat.pair n c))) d hi,
      show takeListTabFn (Nat.pair i (Nat.pair n c)) = (decodeList c).getD i d by
        have hc : (Nat.pair i (Nat.pair n c)).unpair.2.unpair.2 = c := by simp
```

```
        have hi' : (Nat.pair i (Nat.pair n c)).unpair.1 = i := by simp
        rw [takeListTabFn, hc, hi', nthCode_eq,
          show (decodeList c).getD i 0 = (decodeList c).getD i d from by
            rw [getD_eq_getElem_cf _ 0 hic, getD_eq_getElem_cf _ d hic]],
      getD_take_cf (decodeList c) n i d (by rwa [List.length_take])]
  · have hge : Nat.min n (decodeList c).length ≤ i := Nat.le_of_not_gt hi
    rw [getD_eq_default_cf _ d (by rw [List.length_map, List.length_range]; exact hge)
    ,
      getD_eq_default_cf _ d (by rw [List.length_take]; exact hge)]

theorem dropCode_eq (n c : ℕ) :
    decodeList (dropCode n c) = (decodeList c).drop n := by
  unfold dropCode
  rw [decodeList_tabCode, listLenChar_eq c]
  apply list_eq_of_getD
  intro i d
  by_cases hi : i < (decodeList c).length - n
  · have hic : i + n < (decodeList c).length := Nat.add_lt_of_lt_sub hi
    rw [getD_map_range_cf (fun j => dropListTabFn (Nat.pair j (Nat.pair n c))) d hi,
      show dropListTabFn (Nat.pair i (Nat.pair n c)) = (decodeList c).getD (i + n) d
    by
        have hc : (Nat.pair i (Nat.pair n c)).unpair.2.unpair.2 = c := by simp
        have hn : (Nat.pair i (Nat.pair n c)).unpair.2.unpair.1 = n := by simp
        have hi' : (Nat.pair i (Nat.pair n c)).unpair.1 = i := by simp
        rw [dropListTabFn, hi', hn, hc, nthCode_eq,
          show (decodeList c).getD (i + n) 0 = (decodeList c).getD (i + n) d from by
            rw [getD_eq_getElem_cf _ 0 hic, getD_eq_getElem_cf _ d hic]],
      getD_drop_cf (decodeList c) n i d (by rw [List.length_drop]; exact hi)]
  · have hge : (decodeList c).length - n ≤ i := Nat.le_of_not_gt hi
    rw [getD_eq_default_cf _ d (by rw [List.length_map, List.length_range]; exact hge)
    ,
      getD_eq_default_cf _ d (by rw [List.length_drop]; exact hge)]

theorem encodeList_take_le (l : List ℕ) : ∀ n, encodeList (l.take n) ≤ encodeList l :=
    by
  induction l with
  | nil => intro n; simp [encodeList]
  | cons a l ih =>
    intro n
    cases n with
    | zero => simp [encodeList]
    | succ n =>
      show encodeList (a :: l.take n) ≤ encodeList (a :: l)
      simp only [encodeList]
      exact Nat.add_le_add_right (pair_le_pair_right' a (ih n)) 1

theorem encodeList_drop_le (l : List ℕ) : ∀ n, encodeList (l.drop n) ≤ encodeList l :=
    by
  induction l with
  | nil => intro n; simp [encodeList]
  | cons a l ih =>
    intro n
    cases n with
    | zero => simp [encodeList]
    | succ n =>
      show encodeList (l.drop n) ≤ encodeList (a :: l)
```

```
      calc encodeList (l.drop n) ≤ encodeList l := ih n
        _ ≤ Nat.pair a (encodeList l) := le_pair_right a (encodeList l)
        _ ≤ Nat.pair a (encodeList l) + 1 := Nat.le_succ _

theorem takeCode_le (n c : ℕ) : takeCode n c ≤ c := by
  have h1 : takeCode n c = encodeList ((decodeList c).take n) := by
    rw [← takeCode_eq, encodeList_decodeList]
  rw [h1]
  exact le_trans (encodeList_take_le _ n) (le_of_eq (encodeList_decodeList c))

theorem dropCode_le (n c : ℕ) : dropCode n c ≤ c := by
  have h1 : dropCode n c = encodeList ((decodeList c).drop n) := by
    rw [← dropCode_eq, encodeList_decodeList]
  rw [h1]
  exact le_trans (encodeList_drop_le _ n) (le_of_eq (encodeList_decodeList c))

theorem primrec_takeListTabFn : Nat.Primrec takeListTabFn :=
  (primrec_nthCode.comp
    ((Nat.Primrec.right.comp Nat.Primrec.right).pair
      (Nat.Primrec.left.pair (Nat.Primrec.const 0)))).of_eq fun w => by
    simp [takeListTabFn]

theorem primrec_min {f g : ℕ → ℕ} (hf : Nat.Primrec f) (hg : Nat.Primrec g) :
    Nat.Primrec (fun n => Nat.min (f n) (g n)) :=
  (primrec_selectFn (primrec_le hf hg) hf hg).of_eq fun n => by
    unfold selectFn isZero Nat.min
    by_cases h : f n ≤ g n
    · simp [Nat.sub_eq_zero_iff_le.mpr h, Nat.min_eq_left h]
    · have hlt : g n < f n := Nat.lt_of_not_ge h
      have hpos : 0 < f n - g n := Nat.sub_pos_of_lt hlt
      have hmin : min (f n - g n) 1 = 1 := Nat.min_eq_right (Nat.succ_le_iff.mpr hpos)
      simp [hmin, Nat.min_eq_right (Nat.le_of_lt hlt)]

theorem primrec_takeCode : Nat.Primrec (fun t => takeCode t.unpair.1 t.unpair.2) := by
  have hn := Nat.Primrec.left
  have hc := Nat.Primrec.right
  have hlen := primrec_listLenChar.comp hc
  have hB := primrec_min hn hlen
  have hp := hn.pair hc
  have hr := (hB.pair hp).pair hB
  refine ((primrec_tabCode primrec_takeListTabFn).comp hr).of_eq fun t => by
    simp [takeCode]

theorem primrec_dropListTabFn : Nat.Primrec dropListTabFn :=
  (primrec_nthCode.comp
    ((Nat.Primrec.right.comp Nat.Primrec.right).pair
      (Nat.Primrec.pair (primrec_add₂ Nat.Primrec.left (Nat.Primrec.left.comp Nat.
    Primrec.right))
        (Nat.Primrec.const 0)))).of_eq fun w => by
    simp [dropListTabFn]

theorem primrec_dropCode : Nat.Primrec (fun t => dropCode t.unpair.1 t.unpair.2) := by
  have hn := Nat.Primrec.left
  have hc := Nat.Primrec.right
  have hlen := primrec_listLenChar.comp hc
  have hB := primrec_sub₂ hlen hn
```

```
  have hp := hn.pair hc
  have hr := (hB.pair hp).pair hB
  refine ((primrec_tabCode primrec_dropListTabFn).comp hr).of_eq fun t => by
    simp [dropCode]

open DomainTheory.NeighbourhoodSystems Exercise722
open DomainTheory.NeighbourhoodSystems.Exercise722

private theorem c9b5_decodeList_encodeListBool (σ : List Bool) :
    decodeList (c9b5_encodeListBool σ) = σ.map c9b5_boolNat := by
  simp [c9b5_encodeListBool, decodeList_encodeList]

private theorem c9b5_boolNat_injective : Function.Injective c9b5_boolNat := by
  intro b c h
  cases b <;> cases c <;> first | rfl | simp [c9b5_boolNat] at h

private theorem c9b5_decodeList_injective {c1 c2 : ℕ} (h : decodeList c1 = decodeList
    c2) : c1 = c2 := by
  have := congrArg encodeList h
  rwa [encodeList_decodeList, encodeList_decodeList] at this

private theorem c9b5_map_boolNat_eq_iff (w σ : List Bool) :
    w.map c9b5_boolNat = σ.map c9b5_boolNat ↔ w = σ := by
  constructor
  · intro h
    revert σ
    induction w with
    | nil =>
      intro σ h
      cases σ with
      | nil => rfl
      | cons _ _ => simp at h
    | cons b w ih =>
      intro σ h
      cases σ with
      | nil => simp at h
      | cons c σ =>
        simp only [List.map_cons] at h
        obtain ⟨hb, ht⟩ := List.cons.inj h
        have hb' : b = c := by
          cases b <;> cases c <;> first | rfl | simp [c9b5_boolNat] at hb
        exact hb' ▸ congrArg (List.cons c) (ih σ ht)
  · intro h; rw [h]

private theorem c9b5_takeCode_encodeListBool (w : List Bool) (i : ℕ) :
    takeCode i (c9b5_encodeListBool w) = c9b5_encodeListBool (w.take i) := by
  apply c9b5_decodeList_injective
  rw [takeCode_eq, c9b5_decodeList_encodeListBool, ← List.map_take]
  rw [c9b5_decodeList_encodeListBool (σ := w.take i)]

private theorem c9b5_dropCode_encodeListBool (w : List Bool) (i : ℕ) :
    dropCode i (c9b5_encodeListBool w) = c9b5_encodeListBool (w.drop i) := by
  apply c9b5_decodeList_injective
  rw [dropCode_eq, c9b5_decodeList_encodeListBool, ← List.map_drop]
  rw [c9b5_decodeList_encodeListBool (σ := w.drop i)]
```

```
private theorem c9b5_listEqChar_encodeListBool (w σ : List Bool) :
    listEqChar (c9b5_encodeListBool w) (c9b5_encodeListBool σ) = 1 ↔ w = σ := by
  simp only [listEqChar_eq_one_iff, c9b5_decodeList_encodeListBool,
    c9b5_map_boolNat_eq_iff]

theorem autStateCardFuelCharBody_eq (prev : ℕ → ℕ) (c : ℕ) :
    autStateCardFuelCharBody prev c =
      match c.unpair.1 with
      | 0 => 1
      | 1 => listLenChar c.unpair.2 + 2
      | 2 => prev c.unpair.2.unpair.1 + prev c.unpair.2.unpair.2
      | 3 => prev c.unpair.2.unpair.1 * prev c.unpair.2.unpair.2
      | _ => 0 := by
  unfold autStateCardFuelCharBody
  match tag : c.unpair.1 with
  | 0 =>
    have h10 : (1 - 0 : ℕ) = 1 := rfl
    simp only [h10, isOne_one, selectFn_one]
  | 1 =>
    have h01 : (1 - 1 : ℕ) = 0 := rfl
    have h12 : (2 - 1 : ℕ) = 1 := rfl
    simp only [h01, h12, isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | 2 =>
    have h01 : (1 - 2 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h12 : (2 - 2 : ℕ) = 0 := rfl
    have h23 : (3 - 2 : ℕ) = 1 := rfl
    simp only [h01, h23, isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | 3 =>
    have h01 : (1 - 3 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h12 : (2 - 3 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h23 : (3 - 3 : ℕ) = 0 := rfl
    have h34 : (4 - 3 : ℕ) = 1 := rfl
    simp only [h01, h34, isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | t + 4 =>
    have hne1 : isOne (1 - (t + 4)) = 0 := isOne_of_ne_one (by omega)
    have hne2 : isOne (2 - (t + 4)) = 0 := isOne_of_ne_one (by omega)
    have hne3 : isOne (3 - (t + 4)) = 0 := isOne_of_ne_one (by omega)
    have hne4 : isOne (4 - (t + 4)) = 0 := isOne_of_ne_one (by omega)
    simp only [hne1, hne2, hne3, hne4, selectFn_zero]

theorem autStateCardFuelChar_eq_autStateCard {fuel : ℕ} {e : SExpr}
    (h : c9b5_sexprDepth e ≤ fuel) :
    autStateCardFuelChar fuel (c9b5_sexprGodelEncode e) = autStateCard e := by
  induction e generalizing fuel with
  | sigma =>
    cases fuel with
    | zero => simp [c9b5_sexprDepth] at h
    | succ fuel =>
      simp [autStateCardFuelChar, autStateCardFuelCharBody_eq, c9b5_sexprGodelEncode,
    autStateCard]
  | single σ =>
    cases fuel with
    | zero => simp [c9b5_sexprDepth] at h
    | succ fuel =>
      simp [autStateCardFuelChar, autStateCardFuelCharBody_eq, c9b5_sexprGodelEncode,
    autStateCard,
```

```
        listLenChar_eq, c9b5_decodeList_encodeListBool, List.length_map]
  | cat a b iha ihb =>
    cases fuel with
    | zero => simp [c9b5_sexprDepth] at h
    | succ fuel =>
      have ha : c9b5_sexprDepth a ≤ fuel := by
        simp only [c9b5_sexprDepth] at h ⊢; omega
      have hb : c9b5_sexprDepth b ≤ fuel := by
        simp only [c9b5_sexprDepth] at h ⊢; omega
      simp [autStateCardFuelChar, autStateCardFuelCharBody_eq, c9b5_sexprGodelEncode,
    autStateCard,
        iha ha, ihb hb]
  | cap a b iha ihb =>
    cases fuel with
    | zero => simp [c9b5_sexprDepth] at h
    | succ fuel =>
      have ha : c9b5_sexprDepth a ≤ fuel := by
        simp only [c9b5_sexprDepth] at h ⊢; omega
      have hb : c9b5_sexprDepth b ≤ fuel := by
        simp only [c9b5_sexprDepth] at h ⊢; omega
      simp [autStateCardFuelChar, autStateCardFuelCharBody_eq, c9b5_sexprGodelEncode,
    autStateCard,
        iha ha, ihb hb]

theorem primrec_autStateCardFuelCharBody {prev : ℕ → ℕ} (hprev : Nat.Primrec prev) :
    Nat.Primrec (fun c => autStateCardFuelCharBody prev c) := by
  unfold autStateCardFuelCharBody
  have hleft : Nat.Primrec (fun c => prev c.unpair.2.unpair.1) :=
    (hprev.comp (Nat.Primrec.left.comp Nat.Primrec.right)).of_eq fun c => by
      simp only
  have hright : Nat.Primrec (fun c => prev c.unpair.2.unpair.2) :=
    (hprev.comp (Nat.Primrec.right.comp Nat.Primrec.right)).of_eq fun c => by
      simp only
  have hadd := primrec_add₂ hleft hright
  have hmul := primrec_mul₂ hleft hright
  have hf1 := primrec_add₂ (primrec_listLenChar.comp Nat.Primrec.right) (Nat.Primrec.
    const 2)
  exact primrec_tagCase4 (Nat.Primrec.const 1) hf1 hadd hmul (Nat.Primrec.const 0)

theorem autStateCardFuelCharBody_local (f g : ℕ → ℕ) (c : ℕ) (h : ∀ c' ≤ c, f c' = g
    c') :
    autStateCardFuelCharBody f c = autStateCardFuelCharBody g c := by
  rw [autStateCardFuelCharBody_eq, autStateCardFuelCharBody_eq]
  have h1 : c.unpair.2.unpair.1 ≤ c := le_trans (unpair_left_le c.unpair.2) (
    unpair_snd_le c)
  have h2 : c.unpair.2.unpair.2 ≤ c := le_trans (unpair_snd_le c.unpair.2) (
    unpair_snd_le c)
  rw [h _ h1, h _ h2]

theorem matchesBCharBody_eq (prev : ℕ → ℕ) (c cw : ℕ) :
    matchesBCharBody prev c cw =
      match c.unpair.1 with
      | 0 => 1
      | 1 => listEqChar cw c.unpair.2
      | 2 =>
        bExistsFn (matchesBCatG prev) (Nat.pair c cw) (listLenChar cw + 1)
```

```
      | 3 =>
        mulBit (prev (Nat.pair c.unpair.2.unpair.1 cw))
               (prev (Nat.pair c.unpair.2.unpair.2 cw))
      | _ => 0 := by
  unfold matchesBCharBody matchesBCatG
  match tag : c.unpair.1 with
  | 0 =>
    have h10 : (1 - 0 : ℕ) = 1 := rfl
    simp only [h10, isOne_one, selectFn_one]
  | 1 =>
    have h01 : (1 - 1 : ℕ) = 0 := rfl
    have h12 : (2 - 1 : ℕ) = 1 := rfl
    simp only [h01, h12, isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | 2 =>
    have h01 : (1 - 2 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h12 : (2 - 2 : ℕ) = 0 := rfl
    have h23 : (3 - 2 : ℕ) = 1 := rfl
    simp only [h01, h23, isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | 3 =>
    have h01 : (1 - 3 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h12 : (2 - 3 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h23 : (3 - 3 : ℕ) = 0 := rfl
    have h34 : (4 - 3 : ℕ) = 1 := rfl
    simp only [h01, h34, isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | t + 4 =>
    have hne1 : isOne (1 - (t + 4)) = 0 := isOne_of_ne_one (by omega)
    have hne2 : isOne (2 - (t + 4)) = 0 := isOne_of_ne_one (by omega)
    have hne3 : isOne (3 - (t + 4)) = 0 := isOne_of_ne_one (by omega)
    have hne4 : isOne (4 - (t + 4)) = 0 := isOne_of_ne_one (by omega)
    simp only [hne1, hne2, hne3, hne4, selectFn_zero]

private theorem c9b5_matchesBCatG_char (fuel : ℕ) (a b : SExpr) (w : List Bool) (i : ℕ
    ) :
    matchesBCatG (fun p => matchesBChar fuel p.unpair.1 p.unpair.2)
        (Nat.pair i
          (Nat.pair (Nat.pair 2 (Nat.pair (c9b5_sexprGodelEncode a) (
    c9b5_sexprGodelEncode b)))
            (c9b5_encodeListBool w))) =
      mulBit (matchesBChar fuel (c9b5_sexprGodelEncode a) (takeCode i (
    c9b5_encodeListBool w)))
        (matchesBChar fuel (c9b5_sexprGodelEncode b) (dropCode i (c9b5_encodeListBool
    w))) := by
  simp [matchesBCatG]

set_option maxHeartbeats 1600000 in
theorem matchesBChar_eq_one_iff {fuel : ℕ} {e : SExpr} {w : List Bool}
    (h : c9b5_sexprDepth e ≤ fuel) :
    matchesBChar fuel (c9b5_sexprGodelEncode e) (c9b5_encodeListBool w) = 1 ↔
      matchesB e w = true := by
  induction e generalizing fuel w with
  | sigma =>
    cases fuel with
    | zero => simp [c9b5_sexprDepth] at h
    | succ fuel => simp [matchesBChar, matchesBCharBody_eq, matchesB,
    c9b5_sexprGodelEncode]
  | single σ =>
```

```
  cases fuel with
  | zero => simp [c9b5_sexprDepth] at h
  | succ fuel =>
    simp [matchesBChar, matchesBCharBody_eq, c9b5_sexprGodelEncode, matchesB,
      c9b5_listEqChar_encodeListBool w σ, decide_eq_true_eq]
| cat a b iha ihb =>
  cases fuel with
  | zero => simp [c9b5_sexprDepth] at h
  | succ fuel =>
    have ha : c9b5_sexprDepth a ≤ fuel := by
      simp only [c9b5_sexprDepth] at h ⊢; omega
    have hb : c9b5_sexprDepth b ≤ fuel := by
      simp only [c9b5_sexprDepth] at h ⊢; omega
    have hbody := matchesBCharBody_eq (fun p => matchesBChar fuel p.unpair.1 p.
 unpair.2)
        (c9b5_sexprGodelEncode (.cat a b)) (c9b5_encodeListBool w)
    rw [matchesBChar, hbody]
    simp only [c9b5_sexprGodelEncode, unpair_pair_fst, matchesB, List.any_eq_true]
    rw [bExistsFn_eq_one_iff]
    have hlen : listLenChar (c9b5_encodeListBool w) + 1 = w.length + 1 := by
      simp [listLenChar_eq, c9b5_decodeList_encodeListBool, List.length_map]
    constructor
    · intro ⟨i, hi, hg⟩
      rw [c9b5_matchesBCatG_char, mulBit_eq_one_iff] at hg
      obtain ⟨h1, h2⟩ := hg
      have hi' : i < w.length + 1 := by rw [← hlen]; exact hi
      refine ⟨i, (List.mem_range).2 hi', ?_⟩
      simp only [Bool.and_eq_true]
      exact ⟨(iha ha).mp (by rw [← c9b5_takeCode_encodeListBool w i]; exact h1),
        (ihb hb).mp (by rw [← c9b5_dropCode_encodeListBool w i]; exact h2)⟩
    · intro ⟨i, hi, hfg⟩
      have hi' : i < listLenChar (c9b5_encodeListBool w) + 1 := by
        rw [hlen]; exact (List.mem_range).1 hi
      refine ⟨i, hi', ?_⟩
      rw [c9b5_matchesBCatG_char, mulBit_eq_one_iff]
      simp [Bool.and_eq_true] at hfg
      refine And.intro ?h1 ?h2
      · simpa [c9b5_takeCode_encodeListBool w i] using (iha ha).mpr hfg.1
      · simpa [c9b5_dropCode_encodeListBool w i] using (ihb hb).mpr hfg.2
| cap a b iha ihb =>
  cases fuel with
  | zero => simp [c9b5_sexprDepth] at h


  | succ fuel =>
    have ha : c9b5_sexprDepth a ≤ fuel := by
      simp only [c9b5_sexprDepth] at h ⊢; omega
    have hb : c9b5_sexprDepth b ≤ fuel := by
      simp only [c9b5_sexprDepth] at h ⊢; omega
    have hbody := matchesBCharBody_eq (fun p => matchesBChar fuel p.unpair.1 p.
 unpair.2)
        (c9b5_sexprGodelEncode (.cap a b)) (c9b5_encodeListBool w)
    rw [matchesBChar, hbody]
    simp only [c9b5_sexprGodelEncode, unpair_pair_fst, unpair_pair_snd, matchesB,
 mulBit_eq_one_iff]
    constructor
    · intro ⟨h1, h2⟩
```

```
        rw [Bool.and_eq_true]
        exact ⟨(iha ha).mp h1, (ihb hb).mp h2⟩
      · intro hfg
        rw [Bool.and_eq_true] at hfg
        exact ⟨(iha ha).mpr hfg.1, (ihb hb).mpr hfg.2⟩

set_option maxHeartbeats 800000 in
private theorem primrec_matchesBCatG {prev : ℕ → ℕ} (hprev : Nat.Primrec prev) :
    Nat.Primrec (fun p => matchesBCatG prev p) := by
  have hc := Nat.Primrec.left.comp Nat.Primrec.right
  have ha := Nat.Primrec.left.comp (Nat.Primrec.right.comp hc)
  have hb := Nat.Primrec.right.comp (Nat.Primrec.right.comp hc)
  have hcw := Nat.Primrec.right.comp Nat.Primrec.right
  have hi := Nat.Primrec.left
  have h1 := hprev.comp (Nat.Primrec.pair ha (primrec_takeCode.comp (hi.pair hcw)))
  have h2 := hprev.comp (Nat.Primrec.pair hb (primrec_dropCode.comp (hi.pair hcw)))
  exact (primrec_mul₂ h1 h2).of_eq fun p => by
    dsimp [matchesBCatG, mulBit]
    simp only [unpair_pair_fst, unpair_pair_snd]

set_option maxHeartbeats 800000 in
theorem primrec_matchesBCharBody {prev : ℕ → ℕ} (hprev : Nat.Primrec prev) :
    Nat.Primrec (fun t => matchesBCharBody prev t.unpair.1 t.unpair.2) := by
  have htag : Nat.Primrec (fun t => (t.unpair.1).unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.left
  have h01 := primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 1) htag)
  have h12 := primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 2) htag)
  have h23 := primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 3) htag)
  have h34 := primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 4) htag)
  have hf1 := primrec_listEqChar.comp (Nat.Primrec.pair Nat.Primrec.right
    (Nat.Primrec.right.comp Nat.Primrec.left))
  have hpack : Nat.Primrec (fun t => Nat.pair t (listLenChar t.unpair.2 + 1)) :=
    Nat.Primrec.pair primrec_id
      (primrec_add₂ (primrec_listLenChar.comp Nat.Primrec.right) (Nat.Primrec.const 1))
  have hcat := (primrec_bExistsFn (primrec_matchesBCatG hprev)).comp hpack
  have hc := Nat.Primrec.left
  have ha := Nat.Primrec.left.comp (Nat.Primrec.right.comp hc)
  have hb := Nat.Primrec.right.comp (Nat.Primrec.right.comp hc)
  have hcw := Nat.Primrec.right
  have hcap := primrec_mulBit.comp (Nat.Primrec.pair
    (hprev.comp (Nat.Primrec.pair ha hcw)) (hprev.comp (Nat.Primrec.pair hb hcw)))
  exact (primrec_selectFn h01 (Nat.Primrec.const 1)
    (primrec_selectFn h12 hf1
      (primrec_selectFn h23 hcat
        (primrec_selectFn h34 hcap (Nat.Primrec.const 0))))).of_eq fun t => by
    rw [matchesBCharBody_eq]
    match tag : (t.unpair.1).unpair.1 with
    | 0 | 1 | 2 | 3 =>
      simp [selectFn, isOne, mulBit]
    | _ + 4 =>
      simp [selectFn, isOne, mulBit]

theorem matchesBChar_le_one : ∀ fuel c cw, matchesBChar fuel c cw ≤ 1
  | 0, _, _ => by simp [matchesBChar]
  | fuel + 1, c, cw => by
    rw [matchesBChar, matchesBCharBody_eq]
```

```
    match tag : c.unpair.1 with
    | 0 => simp
    | 1 => exact listEqChar_le_one _ _
    | 2 => exact bExistsFn_le_one _ _ _
    | 3 =>
      exact mulBit_le_one (matchesBChar_le_one fuel _ _) (matchesBChar_le_one fuel _ _
    )
    | _ + 4 => simp

theorem matchesBCharBody_local (f g : ℕ → ℕ) (c cw : ℕ)
    (h : ∀ p ≤ Nat.pair c cw, f p = g p) : matchesBCharBody f c cw = matchesBCharBody
    g c cw := by
  rw [matchesBCharBody_eq, matchesBCharBody_eq]
  match tag : c.unpair.1 with
  | 0 => rfl
  | 1 => rfl
  | 2 =>
    simp
    apply bExistsFn_congr
    intro i _
    unfold matchesBCatG
    simp only [unpair_pair_fst, unpair_pair_snd]
    have h1 : Nat.pair c.unpair.2.unpair.1 (takeCode i cw) ≤ Nat.pair c cw :=
      pair_le_pair (le_trans (unpair_left_le c.unpair.2) (unpair_snd_le c)) (
    takeCode_le i cw)
    have h2 : Nat.pair c.unpair.2.unpair.2 (dropCode i cw) ≤ Nat.pair c cw :=
      pair_le_pair (le_trans (unpair_snd_le c.unpair.2) (unpair_snd_le c)) (
    dropCode_le i cw)
    rw [h _ h1, h _ h2]
  | 3 =>
    simp
    have h1 : Nat.pair c.unpair.2.unpair.1 cw ≤ Nat.pair c cw :=
      pair_le_pair (le_trans (unpair_left_le c.unpair.2) (unpair_snd_le c)) (le_refl
    cw)
    have h2 : Nat.pair c.unpair.2.unpair.2 cw ≤ Nat.pair c cw :=
      pair_le_pair (le_trans (unpair_snd_le c.unpair.2) (unpair_snd_le c)) (le_refl cw
    )
    rw [h _ h1, h _ h2]
  | _ + 4 => rfl

private theorem pair_lt_pair_zero_right {t b : ℕ} (ht : t < b) :
    Nat.pair 0 t < Nat.pair 1 b :=
  lt_trans (Nat.pair_lt_pair_right 0 ht) (Nat.pair_lt_pair_left b Nat.zero_lt_one)

theorem codeBound_ge (n c : ℕ) (hlen : (decodeList c).length ≤ n)
    (hbin : ∀ x ∈ decodeList c, x ≤ 1) : c < codeBound n := by
  induction n generalizing c with
  | zero =>
    have hc : c = 0 := by
      cases c with
      | zero => rfl
      | succ c' => simp [decodeList_succ, List.length_cons] at hlen
    simp [hc, codeBound]
  | succ n ih =>
    cases c with
    | zero => simp [codeBound]
```

```
    | succ d =>
      simp only [decodeList_succ, List.length_cons] at hlen
      simp only [decodeList_succ] at hbin
      have htlen : (decodeList d.unpair.2).length ≤ n := by omega
      have htbin : ∀ x ∈ decodeList d.unpair.2, x ≤ 1 := fun x hx =>
        hbin x (List.mem_cons.mpr (Or.inr hx))
      have ht := ih d.unpair.2 htlen htbin
      have hh : d.unpair.1 ≤ 1 := hbin d.unpair.1 (List.mem_cons.mpr (Or.inl rfl))
      have hpair : Nat.pair d.unpair.1 d.unpair.2 < Nat.pair 1 (codeBound n) := by
        rcases (show d.unpair.1 = 0 ∨ d.unpair.1 = 1 by omega) with h0 | h1
        · rw [h0]; exact pair_lt_pair_zero_right ht
        · rw [h1]; exact Nat.pair_lt_pair_right 1 ht
      rw [Nat.pair_unpair] at hpair
      simp only [codeBound]
      omega

private theorem c9b6_allBinDigitsChar_encodeListBool (w : List Bool) :
    allBinDigitsChar (c9b5_encodeListBool w) = 1 := by
  rw [allBinDigitsChar_eq_one_iff]
  intro x hx
  rw [c9b5_decodeList_encodeListBool] at hx
  simp only [List.mem_map] at hx
  obtain ⟨b, _, hb⟩ := hx
  cases b <;> simp [c9b5_boolNat] at hb <;> omega

private theorem c9b6_encodeListBool_lt_codeBound {n : ℕ} {w : List Bool} (hw : w.
    length ≤ n) :
    c9b5_encodeListBool w < codeBound n := by
  apply codeBound_ge n (c9b5_encodeListBool w)
  · rw [c9b5_decodeList_encodeListBool, List.length_map]; exact hw
  · intro x hx
    rw [c9b5_decodeList_encodeListBool] at hx
    simp only [List.mem_map] at hx
    obtain ⟨b, _, hb⟩ := hx
    cases b <;> simp [c9b5_boolNat] at hb <;> omega

private theorem c9b6_boolNat_decide_eq (x : ℕ) (hx : x = 0 ∨ x = 1) :
    c9b5_boolNat (decide (x = 1)) = x := by
  rcases hx with rfl | rfl <;> simp [c9b5_boolNat]

private theorem c9b6_encodeListBool_decodeListBool_of_allBin {c : ℕ}
    (hall : allBinDigitsChar c = 1) :
    c9b5_encodeListBool (c9b6_decodeListBool c) = c := by
  rw [allBinDigitsChar_eq_one_iff] at hall
  apply c9b5_decodeList_injective
  rw [c9b5_decodeList_encodeListBool, c9b6_decodeListBool, List.map_map]
  conv_rhs => rw [← List.map_id (decodeList c)]
  exact List.map_congr_left (fun x hx => c9b6_boolNat_decide_eq x (hall x hx))

private theorem c9b6_matchesBChar_of_allBin {fuel : ℕ} {e : SExpr} {c : ℕ}
    (h : c9b5_sexprDepth e ≤ fuel) (hall : allBinDigitsChar c = 1)
    (hmatch : matchesBChar fuel (c9b5_sexprGodelEncode e) c = 1) :
    matchesB e (c9b6_decodeListBool c) = true := by
  apply (matchesBChar_eq_one_iff (w := c9b6_decodeListBool c) h).1
  rwa [c9b6_encodeListBool_decodeListBool_of_allBin hall]
```

```
theorem decideNonemptyBChar_eq_one_iff {fuel : ℕ} {e : SExpr}
    (h : c9b5_sexprDepth e ≤ fuel) :
    decideNonemptyBChar fuel (c9b5_sexprGodelEncode e) = 1 ↔ (denote e).Nonempty := by
  simp only [decideNonemptyBChar, bExistsFn_eq_one_iff, unpair_pair_fst,
    unpair_pair_snd,
    mulBit_eq_one_iff]
  constructor
  · rintro ⟨i, -, hall, hmatch⟩
    exact ⟨c9b6_decodeListBool i, (matchesB_iff e _).mp (c9b6_matchesBChar_of_allBin h
    hall hmatch)⟩
  · intro hne
    obtain ⟨w, hwmem, hmatch⟩ := (denote_nonempty_iff_short e).mp hne
    refine ⟨c9b5_encodeListBool w, ?_, c9b6_allBinDigitsChar_encodeListBool w,
      (matchesBChar_eq_one_iff h).2 hmatch⟩
    rw [autStateCardFuelChar_eq_autStateCard h]
    exact c9b6_encodeListBool_lt_codeBound (by rwa [mem_wordsUpTo] at hwmem)

theorem c9b6_sexprGodelEncode_cap (a b : SExpr) :
    c9b5_sexprGodelEncode (.cap a b) = capCode (c9b5_sexprGodelEncode a) (
    c9b5_sexprGodelEncode b) :=
  rfl

theorem subsetGuardChar_le_one (fuel c1 c2 i : ℕ) : subsetGuardChar fuel c1 c2 i ≤ 1
    :=
  mulBit_le_one (allBinDigitsChar_le_one _) (isOne_le_one _)

set_option maxHeartbeats 800000 in
theorem subsetBChar_eq_one_iff {fuel : ℕ} {e1 e2 : SExpr}
    (h1 : c9b5_sexprDepth e1 ≤ fuel) (h2 : c9b5_sexprDepth e2 ≤ fuel) :
    subsetBChar fuel (c9b5_sexprGodelEncode e1) (c9b5_sexprGodelEncode e2) = 1 ↔
      denote e1 ⊆ denote e2 := by
  rw [← subsetB_iff]
  have hbound : subsetBoundChar fuel (c9b5_sexprGodelEncode e1) (c9b5_sexprGodelEncode
     e2) =
      Fintype.card (Finset (autState e1) × Finset (autState e2)) := by
    unfold subsetBoundChar
    rw [autStateCardFuelChar_eq_autStateCard h1, autStateCardFuelChar_eq_autStateCard
    h2,
      autStateCard_eq_card, autStateCard_eq_card, Fintype.card_prod, Fintype.
    card_finset,
      Fintype.card_finset]
  unfold subsetB subsetBChar
  rw [List.all_eq_true, bForallFn_eq_one_iff]
  simp only [unpair_pair_fst, unpair_pair_snd, hbound]
  constructor
  · intro h w hwmem
    rw [mem_wordsUpTo] at hwmem
    have hi := h (c9b5_encodeListBool w) (c9b6_encodeListBool_lt_codeBound hwmem)
    have hguard1 : subsetGuardChar fuel (c9b5_sexprGodelEncode e1) (
    c9b5_sexprGodelEncode e2)
        (c9b5_encodeListBool w) = 1 := by
      unfold subsetGuardChar
      rw [c9b6_allBinDigitsChar_encodeListBool, mulBit, one_mul, listLenChar_eq,
        c9b5_decodeList_encodeListBool, List.length_map, hbound,
        Nat.sub_eq_zero_of_le hwmem]
      exact isOne_one
```

```
    rw [hguard1, selectFn_one] at hi
    by_cases hc1 : matchesBChar fuel (c9b5_sexprGodelEncode e1) (c9b5_encodeListBool w
    ) = 1
    · rw [hc1, selectFn_one] at hi
      simp only [Bool.or_eq_true]
      exact Or.inr ((matchesBChar_eq_one_iff h2).mp hi)
    · have hc1' : matchesBChar fuel (c9b5_sexprGodelEncode e1) (c9b5_encodeListBool w)
    = 0 := by
        have := matchesBChar_le_one fuel (c9b5_sexprGodelEncode e1) (
    c9b5_encodeListBool w)
        omega
      simp only [Bool.or_eq_true]
      refine Or.inl ?_
      by_contra hcontra
      exact hc1 ((matchesBChar_eq_one_iff h1).mpr (by simpa using hcontra))
  · intro h i _
    rcases (show subsetGuardChar fuel (c9b5_sexprGodelEncode e1) (
    c9b5_sexprGodelEncode e2) i = 0 ∨
        subsetGuardChar fuel (c9b5_sexprGodelEncode e1) (c9b5_sexprGodelEncode e2) i =
     1 from by
      have := subsetGuardChar_le_one fuel (c9b5_sexprGodelEncode e1) (
    c9b5_sexprGodelEncode e2) i
      omega) with hguard | hguard
    · rw [hguard, selectFn_zero]
    · rw [hguard, selectFn_one]
      unfold subsetGuardChar at hguard
      rw [mulBit_eq_one_iff, isOne_eq_one_iff] at hguard
      obtain ⟨hallbin, hlen0⟩ := hguard
      have hlenle : listLenChar i ≤
          Fintype.card (Finset (autState e1) × Finset (autState e2)) := by omega
      have hieq : c9b5_encodeListBool (c9b6_decodeListBool i) = i :=
        c9b6_encodeListBool_decodeListBool_of_allBin hallbin
      have hwlen : (c9b6_decodeListBool i).length ≤
          Fintype.card (Finset (autState e1) × Finset (autState e2)) := by
        unfold c9b6_decodeListBool
        rw [List.length_map]
        rwa [listLenChar_eq] at hlenle
      have hwmem := (mem_wordsUpTo _).mpr hwlen
      have hspec := h (c9b6_decodeListBool i) hwmem
      rw [← hieq]
      by_cases hc1 : matchesBChar fuel (c9b5_sexprGodelEncode e1) (c9b5_encodeListBool
          (c9b6_decodeListBool i)) = 1
      · rw [hc1, selectFn_one]
        have hc1matches : matchesB e1 (c9b6_decodeListBool i) = true :=
          (matchesBChar_eq_one_iff h1).mp hc1
        simp only [Bool.or_eq_true] at hspec
        rcases hspec with hf | ht
        · rw [hc1matches] at hf; simp at hf
        · exact (matchesBChar_eq_one_iff h2).mpr ht
      · have hc1' : matchesBChar fuel (c9b5_sexprGodelEncode e1)
            (c9b5_encodeListBool (c9b6_decodeListBool i)) = 0 := by
          have := matchesBChar_le_one fuel (c9b5_sexprGodelEncode e1)
            (c9b5_encodeListBool (c9b6_decodeListBool i))
          omega
        rw [hc1', selectFn_zero]
end
```

```
section

theorem RecDecidable₂.swap {r : ℕ → ℕ → Prop} (hr : RecDecidable₂ r) :
    RecDecidable₂ (fun a b => r b a) := by
  have hswap : Nat.Primrec (fun t => Nat.pair t.unpair.2 t.unpair.1) :=
    Nat.Primrec.right.pair Nat.Primrec.left
  refine RecDecidable.of_iff (fun t => ?_) (hr.comp hswap)
  simp only [unpair_pair_fst, unpair_pair_snd]
end

section

theorem RecDecidable.bExists {p : ℕ → Prop} (hp : RecDecidable p) {bound : ℕ → ℕ}
    (hb : Nat.Primrec bound) :
    RecDecidable (fun n => ∃ i, i < bound n ∧ p (Nat.pair i n)) := by
  obtain ⟨f, hf, hfspec⟩ := hp
  refine ⟨fun n => bExistsFn f n (bound n), ?_, ?_⟩
  · have hGfn : Nat.Primrec (fun w => selectFn w.unpair.2.unpair.2 1
        (isOne (f (Nat.pair w.unpair.2.unpair.1 w.unpair.1)))) :=
      primrec_selectFn (Nat.Primrec.right.comp Nat.Primrec.right) (Nat.Primrec.const
    1)
        (primrec_isOne.comp (hf.comp
          ((Nat.Primrec.left.comp Nat.Primrec.right).pair Nat.Primrec.left)))
    have hprec := Nat.Primrec.prec (Nat.Primrec.const 0) hGfn
    refine (hprec.comp (primrec_id.pair hb)).of_eq (fun n => ?_)
    simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]
    rfl
  · intro n
    show (∃ i, i < bound n ∧ p (Nat.pair i n)) ↔ bExistsFn f n (bound n) = 1
    rw [bExistsFn_eq_one_iff]
    exact ⟨fun ⟨i, hi, h⟩ => ⟨i, hi, (hfspec _).mp h⟩, fun ⟨i, hi, h⟩ => ⟨i, hi, (hfspec
    _).mpr h⟩⟩
end

section

theorem RecDecidable.bForall {p : ℕ → Prop} (hp : RecDecidable p) {bound : ℕ → ℕ}
    (hb : Nat.Primrec bound) :
    RecDecidable (fun n => ∀ i, i < bound n → p (Nat.pair i n)) := by
  obtain ⟨f, hf, hfspec⟩ := hp
  refine ⟨fun n => bForallFn f n (bound n), ?_, ?_⟩
  · have hGfn : Nat.Primrec (fun w => selectFn w.unpair.2.unpair.2
        (isOne (f (Nat.pair w.unpair.2.unpair.1 w.unpair.1))) 0) :=
      primrec_selectFn (Nat.Primrec.right.comp Nat.Primrec.right)
        (primrec_isOne.comp (hf.comp
          ((Nat.Primrec.left.comp Nat.Primrec.right).pair Nat.Primrec.left)))
        (Nat.Primrec.const 0)
    have hprec := Nat.Primrec.prec (Nat.Primrec.const 1) hGfn
    refine (hprec.comp (primrec_id.pair hb)).of_eq (fun n => ?_)
    simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]
    rfl
  · intro n
    show (∀ i, i < bound n → p (Nat.pair i n)) ↔ bForallFn f n (bound n) = 1
    rw [bForallFn_eq_one_iff]
    exact ⟨fun h i hi => (hfspec _).mp (h i hi), fun h i hi => (hfspec _).mpr (h i hi)⟩
```

```
end

section

theorem RecDecidable.of_zero_one_char {p : ℕ → Prop} {f : ℕ → ℕ} (hf : Nat.Primrec f
    )
    (_h01 : ∀ n, f n = 0 ∨ f n = 1) (hfe : ∀ n, p n ↔ f n = 1) : RecDecidable p :=
  ⟨f, hf, hfe⟩
end

section

theorem RecDecidable₂.of_paired_zero_one_char {r : ℕ → ℕ → Prop} {f : ℕ → ℕ} (hf :
    Nat.Primrec f)
    (h01 : ∀ t, f t = 0 ∨ f t = 1) (hfe : ∀ n m, r n m ↔ f (Nat.pair n m) = 1) :
    RecDecidable₂ r := by
  unfold RecDecidable₂
  refine RecDecidable.of_zero_one_char hf h01 (fun t => ?_)
  rw [hfe, pair_unpair]
end

section

theorem RecDecidable₃.of_triple_zero_one_char {r : ℕ → ℕ → ℕ → Prop} {f : ℕ → ℕ}
    (hf : Nat.Primrec f) (h01 : ∀ t, f t = 0 ∨ f t = 1)
    (hfe : ∀ n m k, r n m k ↔ f (Nat.pair n (Nat.pair m k)) = 1) :
    RecDecidable₃ r := by
  unfold RecDecidable₃
  refine RecDecidable.of_zero_one_char hf h01 (fun t => ?_)
  rw [hfe, pair_unpair, pair_unpair]
end

section
theorem codeBound_succ (n : ℕ) : codeBound (n + 1) = Nat.pair 1 (codeBound n) + 1 :=
    rfl
end

section
theorem codeBound_zero : codeBound 0 = 1 := rfl
end

section
theorem consistentBChar_eq_one_iff {fuel : ℕ} {a b : SExpr}
    (h : c9b5_sexprDepth (.cap a b) ≤ fuel) :
    consistentBChar fuel (c9b5_sexprGodelEncode a) (c9b5_sexprGodelEncode b) = 1 ↔
      (denote (.cap a b)).Nonempty := by
  simp only [consistentBChar, ← c9b6_sexprGodelEncode_cap]
  exact decideNonemptyBChar_eq_one_iff h
end

section
theorem decideNonemptyBChar_le_one (fuel c_e : ℕ) : decideNonemptyBChar fuel c_e ≤ 1
    :=
  bExistsFn_le_one _ _ _
end
```

```
section

theorem consistentBChar_le_one (fuel c1 c2 : ℕ) : consistentBChar fuel c1 c2 ≤ 1 :=
  decideNonemptyBChar_le_one _ _
end

section
theorem decodeFuelOkChar_le_one : ∀ fuel c, decodeFuelOkChar fuel c ≤ 1
  | 0, _ => by simp [decodeFuelOkChar]
  | fuel + 1, c => by
    rw [decodeFuelOkChar, decodeFuelOkCharBody_eq]
    match tag : c.unpair.1 with
    | 0 =>
      simp
      rcases (show isOne (1 - c.unpair.2) = 0 ∨ isOne (1 - c.unpair.2) = 1 by
        have := isOne_le_one (1 - c.unpair.2); omega) with h0 | h1
      · rw [h0, selectFn_zero]; exact Nat.zero_le 1
      · rw [h1, selectFn_one]
    | 1 =>
      simp
      exact allBinDigitsChar_le_one _
    | 2 | 3 =>
      simp
      exact mulBit_le_one (decodeFuelOkChar_le_one fuel c.unpair.2.unpair.1)
        (decodeFuelOkChar_le_one fuel c.unpair.2.unpair.2)

    | _ + 4 =>
      simp
end

section

theorem decodeList_length_le (c : ℕ) : (decodeList c).length ≤ c := by
  induction c using Nat.strong_induction_on with
  | _ c ih =>
    cases c with
    | zero => simp [decodeList_zero]
    | succ d =>
      rw [decodeList_succ, List.length_cons]
      have hle := unpair_snd_le d
      have := ih d.unpair.2 (Nat.lt_succ_of_le hle)
      omega
end

section
theorem decodeList_mapPairStep (n acc x : ℕ) :
    decodeList (mapPairStep n acc x) = Nat.pair n x :: decodeList acc := by
  unfold mapPairStep; rw [decodeList_succ, unpair_pair_fst, unpair_pair_snd]
end

section

theorem eqZero_bit (a : ℕ) : 1 - a = if a = 0 then 1 else 0 := by split <;> omega
end

section
```

```
theorem eq_of_le_one_iff_one {x y : ℕ} (hx : x ≤ 1) (hy : y ≤ 1) (h : x = 1 ↔ y = 1)
    : x = y := by
  by_cases hx1 : x = 1
  · have hy1 := h.mp hx1; omega
  · have hy1 : y = 1 := fun hy1 => hx1 (h.mpr hy1)
    omega
end

section
theorem existsListStp_eq (g : ℕ → ℕ) (acc x p : ℕ) :
    existsListStp g (Nat.pair x (Nat.pair acc p)) = selectFn acc 1 (isOne (g (Nat.pair
     x p))) := by
  unfold existsListStp; simp only [unpair_pair_fst, unpair_pair_snd]
end

section
theorem existsListChar_eq (g : ℕ → ℕ) (p c : ℕ) :
    existsListChar g p c
      = List.foldl (fun acc x => selectFn acc 1 (isOne (g (Nat.pair x p)))) 0 (
    decodeList c) := by
  have hfun : (fun (acc x : ℕ) => existsListStp g (Nat.pair x (Nat.pair acc p)))
      = (fun acc x => selectFn acc 1 (isOne (g (Nat.pair x p)))) := by
    funext acc x; exact existsListStp_eq g acc x p
  unfold existsListChar; rw [foldCode_eq', hfun]
end

section
theorem existsListChar_le_one (g : ℕ → ℕ) (p c : ℕ) : existsListChar g p c ≤ 1 := by
  have h : ∀ (l : List ℕ) (z : ℕ), z ≤ 1 →
      List.foldl (fun acc x => existsListStp g (Nat.pair x (Nat.pair acc p))) z l ≤ 1
    := by
    intro l
    induction l with
    | nil => intro z hz; simpa using hz
    | cons x xs ih =>
      intro z hz
      simp only [List.foldl_cons]
      apply ih
      rw [existsListStp_eq]
      rcases (show z = 0 ∨ z = 1 by omega) with h0 | h1
      · rw [h0, selectFn_zero]; exact isOne_le_one _
      · rw [h1, selectFn_one]
  unfold existsListChar
  rw [foldCode_eq']
  exact h (decodeList c) 0 (Nat.zero_le 1)
end

section

theorem existsList_foldl_eq_one_iff (g : ℕ → ℕ) (p : ℕ) :
    ∀ (l : List ℕ) (acc : ℕ), acc ≤ 1 →
      (List.foldl (fun acc x => selectFn acc 1 (isOne (g (Nat.pair x p)))) acc l = 1 ↔
        acc = 1 ∨ ∃ x ∈ l, g (Nat.pair x p) = 1) := by
  intro l
  induction l with
```

```
  | nil => intro acc _; simp only [List.foldl_nil, List.not_mem_nil, false_and,
    exists_false,
      or_false]
  | cons x l ih =>
    intro acc hacc
    rw [List.foldl_cons]
    set acc' := selectFn acc 1 (isOne (g (Nat.pair x p))) with hacc'
    have hacc'le : acc' ≤ 1 := by
      rw [hacc']
      rcases (show acc = 0 ∨ acc = 1 by omega) with h | h
      · rw [h, selectFn_zero]; exact isOne_le_one _
      · rw [h, selectFn_one]
    rw [ih acc' hacc'le]
    constructor
    · rintro (hacc'1 | ⟨y, hy, hyg⟩)
      · rw [hacc'] at hacc'1
        rcases (show acc = 0 ∨ acc = 1 by omega) with h | h
        · rw [h, selectFn_zero, isOne_eq_one_iff] at hacc'1
          exact Or.inr ⟨x, List.mem_cons.mpr (Or.inl rfl), hacc'1⟩
        · exact Or.inl h
      · exact Or.inr ⟨y, List.mem_cons.mpr (Or.inr hy), hyg⟩
    · rintro (hacc1 | ⟨y, hy, hyg⟩)
      · exact Or.inl (by rw [hacc', hacc1, selectFn_one])
      · rcases List.mem_cons.mp hy with rfl | hy'
        · refine Or.inl ?_
          rw [hacc']
          rcases (show acc = 0 ∨ acc = 1 by omega) with h | h
          · rw [h, selectFn_zero, isOne_eq_one_iff]; exact hyg
          · rw [h, selectFn_one]
        · exact Or.inr ⟨y, hy', hyg⟩
end

section
theorem existsListChar_eq_one_iff (g : ℕ → ℕ) (p c : ℕ) :
    existsListChar g p c = 1 ↔ ∃ x ∈ decodeList c, g (Nat.pair x p) = 1 := by
  rw [existsListChar_eq, existsList_foldl_eq_one_iff g p (decodeList c) 0 (Nat.zero_le
    1)]
  simp only [Nat.zero_ne_one, false_or]
end

section
theorem fuelTableStep_nth {bodyLookup : ℕ → ℕ} {bound prevTable i : ℕ} (hi : i ≤
    bound) (d : ℕ) :
    nthCode (fuelTableStep bodyLookup bound prevTable) i d = bodyLookup (Nat.pair
    prevTable i) := by
  unfold fuelTableStep
  rw [tabCode_nth_lt (show i < bound + 1 by omega)]
  simp only [unpair_pair_fst, unpair_pair_snd]
end

section
theorem fuelTable_succ_nth {bodyLookup : ℕ → ℕ} {bound fuel i : ℕ} (hi : i ≤ bound) (
    d : ℕ) :
    nthCode (fuelTable bodyLookup bound (fuel + 1)) i d =
      bodyLookup (Nat.pair (fuelTable bodyLookup bound fuel) i) :=
  fuelTableStep_nth hi d
```

```
end

section
theorem fuelTable_zero_nth {bodyLookup : ℕ → ℕ} {bound i : ℕ} (hi : i ≤ bound) (d : ℕ
    ) :
    nthCode (fuelTable bodyLookup bound 0) i d = 0 := by
  show nthCode (tabCode (fun _ => 0) (Nat.pair (bound + 1) 0) (bound + 1)) i d = 0
  rw [tabCode_nth_lt (show i < bound + 1 by omega)]
end

section

theorem fuelTable_eq_of_recursion {F : ℕ → ℕ → ℕ} {Body : (ℕ → ℕ) → ℕ → ℕ} {
    bodyLookup : ℕ → ℕ}
    (hF0 : ∀ c, F 0 c = 0) (hFsucc : ∀ fuel c, F (fuel + 1) c = Body (F fuel) c)
    (hlookup : ∀ table c, bodyLookup (Nat.pair table c) = Body (fun c' => nthCode table
     c' 0) c)
    (hlocal : ∀ (f g : ℕ → ℕ) c, (∀ c' ≤ c, f c' = g c') → Body f c = Body g c) :
    ∀ fuel bound c, c ≤ bound → nthCode (fuelTable bodyLookup bound fuel) c 0 = F
    fuel c := by
  intro fuel
  induction fuel with
  | zero => intro bound c hc; rw [fuelTable_zero_nth hc, hF0]
  | succ fuel ih =>
    intro bound c hc
    rw [fuelTable_succ_nth hc, hlookup, hFsucc]
    exact hlocal _ _ c fun c' hc' => ih bound c' (le_trans hc' hc)
end

section
theorem autStateCardFuelChar_fuelTable_eq :
    ∀ fuel bound c, c ≤ bound →
      nthCode (fuelTable autStateCardFuelCharLookup bound fuel) c 0 =
    autStateCardFuelChar fuel c :=
  fuelTable_eq_of_recursion (F := autStateCardFuelChar) (Body :=
    autStateCardFuelCharBody)
    (fun _ => rfl) (fun _ _ => rfl)
    (fun table c => by unfold autStateCardFuelCharLookup; simp)
    autStateCardFuelCharBody_local
end

section
theorem decodeFuelOkChar_fuelTable_eq :
    ∀ fuel bound c, c ≤ bound →
      nthCode (fuelTable decodeFuelOkCharLookup bound fuel) c 0 = decodeFuelOkChar
    fuel c :=
  fuelTable_eq_of_recursion (F := decodeFuelOkChar) (Body := decodeFuelOkCharBody)
    (fun _ => rfl) (fun _ _ => rfl)
    (fun table c => by unfold decodeFuelOkCharLookup; simp)
    decodeFuelOkCharBody_local
end

section

theorem geTwo_bit (a : ℕ) : 1 - (2 - a) = if 2 ≤ a then 1 else 0 := by split <;> omega
end
```

```
section

theorem getD_append_cf {β : Type*} (l l' : List β) (d : β) :
    ∀ {n : ℕ}, n < l.length → (l ++ l').getD n d = l.getD n d := by
  induction l with
  | nil => intro n h; exact absurd h (Nat.not_lt_zero n)
  | cons a t ih =>
    intro n h
    cases n with
    | zero => rw [List.cons_append, List.getD_cons_zero, List.getD_cons_zero]
    | succ m =>
      rw [List.cons_append, List.getD_cons_succ, List.getD_cons_succ]
      exact ih (by rw [List.length_cons] at h; omega)
end

section

theorem getD_append_right_cf {β : Type*} (l l' : List β) (d : β) :
    ∀ {n : ℕ}, l.length ≤ n → (l ++ l').getD n d = l'.getD (n - l.length) d := by
  induction l with
  | nil => intro n _; rw [List.nil_append, List.length_nil, Nat.sub_zero]
  | cons a t ih =>
    intro n h
    cases n with
    | zero => exact absurd h (by rw [List.length_cons]; exact Nat.not_succ_le_zero _)
    | succ m =>
      rw [List.cons_append, List.getD_cons_succ, List.length_cons, Nat.succ_sub_succ]
      exact ih (by rw [List.length_cons] at h; omega)
end

section
theorem appendListCode_eq (c1 c2 : ℕ) :
    decodeList (appendListCode c1 c2) = decodeList c1 ++ decodeList c2 := by
  unfold appendListCode
  rw [decodeList_tabCode, listLenChar_eq c1, listLenChar_eq c2]
  apply list_eq_of_getD
  intro i d
  by_cases hi : i < (decodeList c1).length + (decodeList c2).length
  · have hf := appendListTabFn_eq c1 c2 (decodeList c1).length i
    rw [getD_map_range_cf
        (fun j => appendListTabFn (Nat.pair j (Nat.pair c1 (Nat.pair c2 (decodeList c1
   ).length)))) d hi,
      hf]
    by_cases hlt : i < (decodeList c1).length
    · rw [ite_eq_left hlt,
        show (decodeList c1).getD i 0 = (decodeList c1).getD i d from by
          rw [getD_eq_getElem_cf _ 0 hlt, getD_eq_getElem_cf _ d hlt],
        (getD_append_cf (decodeList c1) (decodeList c2) d hlt).symm]
    · rw [ite_eq_right hlt,
        show (decodeList c2).getD (i - (decodeList c1).length) 0 =
            (decodeList c2).getD (i - (decodeList c1).length) d from by
          have hi2 : i - (decodeList c1).length < (decodeList c2).length := by
            have hle : (decodeList c1).length ≤ i := Nat.le_of_not_gt hlt
            omega
          rw [getD_eq_getElem_cf _ 0 hi2, getD_eq_getElem_cf _ d hi2],
```

```
        (getD_append_right_cf (decodeList c1) (decodeList c2) d (Nat.le_of_not_gt hlt)
    ).symm]
  · have hge : (decodeList c1).length + (decodeList c2).length ≤ i := Nat.le_of_not_gt
    hi
    rw [getD_eq_default_cf _ d (by rw [List.length_map, List.length_range]; exact hge)
    ,
      getD_eq_default_cf _ d (by rw [List.length_append]; exact hge)]
end

section
theorem halfParity_spec (n : ℕ) : halfParity n = Nat.pair (n / 2) (n % 2) := by
  induction n with
  | zero => rfl
  | succ n ih =>
    show Nat.pair ((halfParity n).unpair.1 + (halfParity n).unpair.2) (1 - (halfParity
     n).unpair.2)
        = Nat.pair ((n + 1) / 2) ((n + 1) % 2)
    rw [ih, unpair_pair_fst, unpair_pair_snd]
    congr 1 <;> omega
end

section
theorem interEqChar_eq_one_iff {fuel : ℕ} {e1 e2 : SExpr}
    (h1 : c9b5_sexprDepth e1 ≤ fuel) (h2 : c9b5_sexprDepth e2 ≤ fuel) :
    interEqChar fuel (c9b5_sexprGodelEncode e1) (c9b5_sexprGodelEncode e2) = 1 ↔
      denote e1 = denote e2 := by
  unfold interEqChar
  rw [mulBit_eq_one_iff, subsetBChar_eq_one_iff h1 h2, subsetBChar_eq_one_iff h2 h1,
    ← Set.Subset.antisymm_iff]
end

section
theorem mapPairStp_eq (n acc x : ℕ) :
    mapPairStp (Nat.pair x (Nat.pair acc n)) = mapPairStep n acc x := by
  unfold mapPairStp; simp only [unpair_pair_fst, unpair_pair_snd]
end

section
theorem decodeList_foldl_mapPairStp (n : ℕ) (el : List ℕ) (acc : ℕ) :
    decodeList (List.foldl (fun acc x => mapPairStp (Nat.pair x (Nat.pair acc n))) acc
     el)
      = (el.map (Nat.pair n ·)).reverse ++ decodeList acc := by
  induction el generalizing acc with
  | nil => simp
  | cons e el ih =>
    rw [List.foldl_cons, ih, mapPairStp_eq, decodeList_mapPairStep, List.map_cons,
      List.reverse_cons, List.append_assoc, List.singleton_append]
end

section
theorem decodeList_mapPairCode (n c : ℕ) :
    decodeList (mapPairCode n c) = ((decodeList c).map (Nat.pair n ·)).reverse := by
  unfold mapPairCode
  rw [foldCode_eq']
  have h := decodeList_foldl_mapPairStp n (decodeList c) 0
  rwa [decodeList_zero, List.append_nil] at h
```

```
end

section
theorem matchesBChar_fuelTable_eq :
    ∀ fuel bound code, code ≤ bound →
      nthCode (fuelTable matchesBCharBodyLookup bound fuel) code 0 =
        matchesBChar fuel code.unpair.1 code.unpair.2 :=
  fuelTable_eq_of_recursion
    (F := fun fuel code => matchesBChar fuel code.unpair.1 code.unpair.2)
    (Body := fun prev code => matchesBCharBody prev code.unpair.1 code.unpair.2)
    (fun _ => rfl) (fun _ _ => rfl)
    (fun table code => by unfold matchesBCharBodyLookup; simp)
    (fun f g code h => matchesBCharBody_local f g code.unpair.1 code.unpair.2 (by
      simpa [pair_unpair] using h))
end

section
theorem primrec_allListChar {g : ℕ → ℕ} (hg : Nat.Primrec g) :
    Nat.Primrec (fun t => allListChar g t.unpair.2 t.unpair.1) :=
  (primrec_foldCode (primrec_allListStp hg) Nat.Primrec.right (Nat.Primrec.const 1)
    Nat.Primrec.left).of_eq fun _ => rfl
end

section

theorem RecDecidable₂.bForallList {q : ℕ → ℕ → Prop} (hq : RecDecidable₂ q) :
    RecDecidable₂ (fun c p => ∀ e ∈ decodeList c, q e p) := by
  obtain ⟨g, hgp, hgs⟩ := hq
  refine ⟨fun t => allListChar g t.unpair.2 t.unpair.1, primrec_allListChar hgp, fun t
    => ?_⟩
  show (∀ e ∈ decodeList t.unpair.1, q e t.unpair.2) ↔ allListChar g t.unpair.2 t.
    unpair.1 = 1
  rw [allListChar_eq_one_iff]
  refine forall_congr' fun e => forall_congr' fun _ => ?_
  have := hgs (Nat.pair e t.unpair.2)
  simp only [unpair_pair_fst, unpair_pair_snd] at this
  exact this
end

section
theorem primrec_appendListTabFn : Nat.Primrec appendListTabFn := by
  have hi := Nat.Primrec.left
  have hp := Nat.Primrec.right
  have hlen1 := Nat.Primrec.right.comp (Nat.Primrec.right.comp hp)
  have hc1 := Nat.Primrec.left.comp hp
  have hc2 := Nat.Primrec.left.comp (Nat.Primrec.right.comp hp)
  have hlt := primrec_isZero.comp
    (primrec_sub₂ (primrec_add₂ hi (Nat.Primrec.const 1)) hlen1)
  have hleft := primrec_nthCode.comp (hc1.pair (Nat.Primrec.pair hi (Nat.Primrec.const
    0)))
  have hright := primrec_nthCode.comp
    (hc2.pair (Nat.Primrec.pair (primrec_sub₂ hi hlen1) (Nat.Primrec.const 0)))
  exact (primrec_selectFn hlt hleft hright).of_eq fun w => by
    unfold appendListTabFn
    simp only [unpair_pair_fst, unpair_pair_snd]
end
```

```
section
theorem primrec_appendListCode : Nat.Primrec (fun t => appendListCode t.unpair.1 t.
    unpair.2) := by
  have hc1 := Nat.Primrec.left
  have hc2 := Nat.Primrec.right
  have hlen1 := primrec_listLenChar.comp hc1
  have hlen2 := primrec_listLenChar.comp hc2
  have hsum := primrec_add₂ hlen1 hlen2
  have hp := hc1.pair (hc2.pair hlen1)
  have hr := (hsum.pair hp).pair hsum
  refine ((primrec_tabCode primrec_appendListTabFn).comp hr).of_eq fun t => by
    unfold appendListCode
    simp only [unpair_pair_fst, unpair_pair_snd]
end

section
theorem primrec_autStateCardFuelChar : ∀ fuel, Nat.Primrec (fun c =>
    autStateCardFuelChar fuel c)
  | 0 => Nat.Primrec.const 0
  | fuel + 1 => by
    simpa [autStateCardFuelChar] using
      primrec_autStateCardFuelCharBody (primrec_autStateCardFuelChar fuel)
end

section
theorem primrec_autStateCardFuelCharLookup : Nat.Primrec autStateCardFuelCharLookup :=
     by
  have hleft : Nat.Primrec (fun w => nthCode w.unpair.1 w.unpair.2.unpair.2.unpair.1
    0) :=
    (primrec_nthCode.comp (Nat.Primrec.pair Nat.Primrec.left
      (Nat.Primrec.pair (Nat.Primrec.left.comp (Nat.Primrec.right.comp Nat.Primrec.
    right))
        (Nat.Primrec.const 0)))).of_eq fun w => by simp
  have hright : Nat.Primrec (fun w => nthCode w.unpair.1 w.unpair.2.unpair.2.unpair.2
    0) :=
    (primrec_nthCode.comp (Nat.Primrec.pair Nat.Primrec.left
      (Nat.Primrec.pair (Nat.Primrec.right.comp (Nat.Primrec.right.comp Nat.Primrec.
    right))
        (Nat.Primrec.const 0)))).of_eq fun w => by simp
  have hadd : Nat.Primrec (fun w =>
      nthCode w.unpair.1 w.unpair.2.unpair.2.unpair.1 0 +
        nthCode w.unpair.1 w.unpair.2.unpair.2.unpair.2 0) :=
    primrec_add₂ hleft hright
  have hmul : Nat.Primrec (fun w =>
      nthCode w.unpair.1 w.unpair.2.unpair.2.unpair.1 0 *
        nthCode w.unpair.1 w.unpair.2.unpair.2.unpair.2 0) :=
    primrec_mul₂ hleft hright
  have hf0 : Nat.Primrec (fun _ : ℕ => (1 : ℕ)) := Nat.Primrec.const 1
  have hf1 : Nat.Primrec (fun w => listLenChar w.unpair.2.unpair.2 + 2) :=
    primrec_add₂ (primrec_listLenChar.comp (Nat.Primrec.right.comp Nat.Primrec.right))
      (Nat.Primrec.const 2)
  have ht : Nat.Primrec (fun w => w.unpair.2.unpair.1) := Nat.Primrec.left.comp Nat.
    Primrec.right
  have h01 : Nat.Primrec (fun w => isOne (1 - w.unpair.2.unpair.1)) :=
    primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 1) ht)
```

```
  have h12 : Nat.Primrec (fun w => isOne (2 - w.unpair.2.unpair.1)) :=
    primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 2) ht)
  have h23 : Nat.Primrec (fun w => isOne (3 - w.unpair.2.unpair.1)) :=
    primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 3) ht)
  have h34 : Nat.Primrec (fun w => isOne (4 - w.unpair.2.unpair.1)) :=
    primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 4) ht)
  refine (primrec_selectFn h01 hf0
    (primrec_selectFn h12 hf1
      (primrec_selectFn h23 hadd
        (primrec_selectFn h34 hmul (Nat.Primrec.const 0))))).of_eq fun w => ?_
  show _ = autStateCardFuelCharBody (fun c' => nthCode w.unpair.1 c' 0) w.unpair.2

  rw [autStateCardFuelCharBody_eq]
  match tag : w.unpair.2.unpair.1 with
  | 0 =>
    have h10 : (1 - 0 : ℕ) = 1 := rfl
    simp only [h10, isOne_one, selectFn_one]
  | 1 =>
    have h01' : (1 - 1 : ℕ) = 0 := rfl
    have h12' : (2 - 1 : ℕ) = 1 := rfl
    simp only [h01', h12', isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | 2 =>
    have h01' : (1 - 2 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h12' : (2 - 2 : ℕ) = 0 := rfl
    have h23' : (3 - 2 : ℕ) = 1 := rfl
    simp only [h01', h23', isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | 3 =>
    have h01' : (1 - 3 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h12' : (2 - 3 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h23' : (3 - 3 : ℕ) = 0 := rfl
    have h34' : (4 - 3 : ℕ) = 1 := rfl
    simp only [h01', h34', isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | t + 4 =>
    have h01' : (1 - (t + 4) : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h12' : (2 - (t + 4) : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h23' : (3 - (t + 4) : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h34' : (4 - (t + 4) : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    simp only [h01', h12', h23', h34', isOne_zero, selectFn_zero]
end

section

theorem primrec_bForallFn_param {g : ℕ → ℕ} (hg : Nat.Primrec g) :
    Nat.Primrec (fun t => bForallFn (fun p => g (Nat.pair t.unpair.1.unpair.1 p))
      t.unpair.1.unpair.2 t.unpair.2) := by
  have hGfn : Nat.Primrec (fun w =>
      selectFn w.unpair.2.unpair.2
        (isOne (g (Nat.pair w.unpair.1.unpair.1
          (Nat.pair w.unpair.2.unpair.1 w.unpair.1.unpair.2)))) 0) :=
    primrec_selectFn (Nat.Primrec.right.comp Nat.Primrec.right)
      (primrec_isOne.comp (hg.comp
        (Nat.Primrec.pair (Nat.Primrec.left.comp Nat.Primrec.left)
          (Nat.Primrec.pair (Nat.Primrec.left.comp Nat.Primrec.right)
            (Nat.Primrec.right.comp Nat.Primrec.left)))))
      (Nat.Primrec.const 0)
  have hprec := Nat.Primrec.prec (Nat.Primrec.const 1) hGfn
```

```
  refine (hprec.comp (Nat.Primrec.left.pair Nat.Primrec.right)).of_eq fun t => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]
  rfl
end

section
theorem primrec_codeBound : Nat.Primrec codeBound := by
  have hstep : Nat.Primrec (fun w => Nat.pair 1 w.unpair.2 + 1) :=
    primrec_add₂ (Nat.Primrec.pair (Nat.Primrec.const 1) Nat.Primrec.right)
      (Nat.Primrec.const 1)
  have haux : ∀ n, Nat.rec (motive := fun _ => ℕ) 1
      (fun y IH => Nat.pair 1 (Nat.pair y IH).unpair.2 + 1) n = codeBound n := by
    intro n
    induction n with
    | zero => simp [codeBound]
    | succ n ih =>
      simp only [unpair_pair_snd] at ih ⊢
      simp [codeBound, ih]
  exact (Nat.Primrec.prec1 1 hstep).of_eq haux
end

section
theorem primrec_decodeFuelOkChar : ∀ fuel, Nat.Primrec (fun c => decodeFuelOkChar fuel
    c)
  | 0 => Nat.Primrec.const 0
  | fuel + 1 => by
    simpa [decodeFuelOkChar] using
      primrec_decodeFuelOkCharBody (primrec_decodeFuelOkChar fuel)
end

section
theorem primrec_decodeFuelOkCharLookup : Nat.Primrec decodeFuelOkCharLookup := by
  have hleft : Nat.Primrec (fun w => nthCode w.unpair.1 w.unpair.2.unpair.2.unpair.1
    0) :=
    (primrec_nthCode.comp (Nat.Primrec.pair Nat.Primrec.left
      (Nat.Primrec.pair (Nat.Primrec.left.comp (Nat.Primrec.right.comp Nat.Primrec.
    right))
        (Nat.Primrec.const 0)))).of_eq fun w => by simp
  have hright : Nat.Primrec (fun w => nthCode w.unpair.1 w.unpair.2.unpair.2.unpair.2
    0) :=
    (primrec_nthCode.comp (Nat.Primrec.pair Nat.Primrec.left
      (Nat.Primrec.pair (Nat.Primrec.right.comp (Nat.Primrec.right.comp Nat.Primrec.
    right))
        (Nat.Primrec.const 0)))).of_eq fun w => by simp
  have hsub : Nat.Primrec (fun w =>
      mulBit (nthCode w.unpair.1 w.unpair.2.unpair.2.unpair.1 0)
        (nthCode w.unpair.1 w.unpair.2.unpair.2.unpair.2 0)) :=
    primrec_mul₂ hleft hright
  have hf0 : Nat.Primrec (fun w => selectFn (isOne (1 - w.unpair.2.unpair.2)) 1 0) :=
    primrec_selectFn
      (primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 1) (Nat.Primrec.right.comp
    Nat.Primrec.right)))
      (Nat.Primrec.const 1) (Nat.Primrec.const 0)
  have hf1 : Nat.Primrec (fun w => allBinDigitsChar w.unpair.2.unpair.2) :=
    primrec_allBinDigitsChar.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have ht : Nat.Primrec (fun w => w.unpair.2.unpair.1) := Nat.Primrec.left.comp Nat.
```

```
    Primrec.right
  have h01 : Nat.Primrec (fun w => isOne (1 - w.unpair.2.unpair.1)) :=
    primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 1) ht)
  have h12 : Nat.Primrec (fun w => isOne (2 - w.unpair.2.unpair.1)) :=
    primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 2) ht)
  have h23 : Nat.Primrec (fun w => isOne (3 - w.unpair.2.unpair.1)) :=
    primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 3) ht)
  have h34 : Nat.Primrec (fun w => isOne (4 - w.unpair.2.unpair.1)) :=
    primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 4) ht)
  refine (primrec_selectFn h01 hf0
    (primrec_selectFn h12 hf1
      (primrec_selectFn h23 hsub
        (primrec_selectFn h34 hsub (Nat.Primrec.const 0))))).of_eq fun w => ?_
  show _ = decodeFuelOkCharBody (fun c' => nthCode w.unpair.1 c' 0) w.unpair.2
  rw [decodeFuelOkCharBody_eq]
  match tag : w.unpair.2.unpair.1 with
  | 0 =>
    have h10 : (1 - 0 : ℕ) = 1 := rfl
    simp only [h10, isOne_one, selectFn_one]
  | 1 =>
    have h01' : (1 - 1 : ℕ) = 0 := rfl
    have h12' : (2 - 1 : ℕ) = 1 := rfl
    simp only [h01', h12', isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | 2 =>
    have h01' : (1 - 2 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h12' : (2 - 2 : ℕ) = 0 := rfl
    have h23' : (3 - 2 : ℕ) = 1 := rfl
    simp only [h01', h23', isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | 3 =>
    have h01' : (1 - 3 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h12' : (2 - 3 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h23' : (3 - 3 : ℕ) = 0 := rfl
    have h34' : (4 - 3 : ℕ) = 1 := rfl
    simp only [h01', h34', isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | t + 4 =>
    have h01' : (1 - (t + 4) : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h12' : (2 - (t + 4) : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h23' : (3 - (t + 4) : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h34' : (4 - (t + 4) : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    simp only [h01', h12', h23', h34', isOne_zero, selectFn_zero]
end

section
theorem primrec_existsListStp {g : ℕ → ℕ} (hg : Nat.Primrec g) :
    Nat.Primrec (existsListStp g) := by
  have hacc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hx : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hp : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hcall : Nat.Primrec (fun w : ℕ => isOne (g (Nat.pair w.unpair.1 w.unpair.2.
    unpair.2))) :=
    primrec_isOne.comp (hg.comp (hx.pair hp))
  exact (primrec_selectFn hacc (Nat.Primrec.const 1) hcall).of_eq fun _ => rfl
end
```

```
section
theorem primrec_existsListChar {g : ℕ → ℕ} (hg : Nat.Primrec g) :
    Nat.Primrec (fun t => existsListChar g t.unpair.2 t.unpair.1) :=
  (primrec_foldCode (primrec_existsListStp hg) Nat.Primrec.right (Nat.Primrec.const 0)
    Nat.Primrec.left).of_eq fun _ => rfl
end

section

theorem RecDecidable₂.bExistsList {q : ℕ → ℕ → Prop} (hq : RecDecidable₂ q) :
    RecDecidable₂ (fun c p => ∃ e ∈ decodeList c, q e p) := by
  obtain ⟨g, hgp, hgs⟩ := hq
  refine ⟨fun t => existsListChar g t.unpair.2 t.unpair.1, primrec_existsListChar hgp,
    fun t => ?_⟩
  show (∃ e ∈ decodeList t.unpair.1, q e t.unpair.2) ↔ existsListChar g t.unpair.2 t.
    unpair.1 = 1
  rw [existsListChar_eq_one_iff]
  refine exists_congr fun e => and_congr_right fun _ => ?_
  have := hgs (Nat.pair e t.unpair.2)
  simp only [unpair_pair_fst, unpair_pair_snd] at this
  exact this
end

section
set_option maxHeartbeats 1000000 in

theorem primrec_fuelTable {bodyLookup : ℕ → ℕ} (hbodyLookup : Nat.Primrec bodyLookup)
    :
    Nat.Primrec (fun t => fuelTable bodyLookup t.unpair.1 t.unpair.2) := by
  have hgLookup : Nat.Primrec (fun v => bodyLookup (Nat.pair v.unpair.2 v.unpair.1))
    :=
    hbodyLookup.comp (Nat.Primrec.pair Nat.Primrec.right Nat.Primrec.left)
  have htab := primrec_tabCode hgLookup
  have hf : Nat.Primrec (fun bound => tabCode (fun _ => 0) (Nat.pair (bound + 1) 0) (
    bound + 1)) :=
    ((primrec_tabCode (Nat.Primrec.const 0)).comp
      (Nat.Primrec.pair
        (Nat.Primrec.pair (primrec_add₂ Nat.Primrec.id (Nat.Primrec.const 1)) (Nat.
    Primrec.const 0))
        (primrec_add₂ Nat.Primrec.id (Nat.Primrec.const 1)))).of_eq fun bound => by
    simp
  have hpack : Nat.Primrec (fun w =>
      Nat.pair (Nat.pair (w.unpair.1 + 1) w.unpair.2.unpair.2) (w.unpair.1 + 1)) :=
    Nat.Primrec.pair
      (Nat.Primrec.pair (primrec_add₂ Nat.Primrec.left (Nat.Primrec.const 1))
        (Nat.Primrec.right.comp Nat.Primrec.right))
      (primrec_add₂ Nat.Primrec.left (Nat.Primrec.const 1))
  have hg : Nat.Primrec (fun w => fuelTableStep bodyLookup w.unpair.1 w.unpair.2.
    unpair.2) :=
    (htab.comp hpack).of_eq fun w => by simp [fuelTableStep]
  have haux : ∀ bound fuel, Nat.rec (motive := fun _ => ℕ)
      (tabCode (fun _ => 0) (Nat.pair (bound + 1) 0) (bound + 1))
      (fun _ IH => fuelTableStep bodyLookup bound IH) fuel = fuelTable bodyLookup
    bound fuel := by
    intro bound fuel
    induction fuel with
```

```
    | zero => rfl
    | succ fuel ih => show fuelTableStep bodyLookup bound _ = fuelTableStep bodyLookup
     bound _; rw [ih]
  refine (Nat.Primrec.prec hf hg).of_eq fun t => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]
  exact haux t.unpair.1 t.unpair.2
end

section

theorem primrec_autStateCardFuelChar2 :
    Nat.Primrec (fun s => autStateCardFuelChar s.unpair.1 s.unpair.2) := by
  have hft := primrec_fuelTable primrec_autStateCardFuelCharLookup
  have hpack : Nat.Primrec (fun s : ℕ => Nat.pair s.unpair.2 s.unpair.1) :=
    Nat.Primrec.pair Nat.Primrec.right Nat.Primrec.left
  have hcomp : Nat.Primrec (fun s => fuelTable autStateCardFuelCharLookup s.unpair.2 s
    .unpair.1) :=
    (hft.comp hpack).of_eq fun s => by simp
  have hnth : Nat.Primrec
      (fun s => nthCode (fuelTable autStateCardFuelCharLookup s.unpair.2 s.unpair.1) s
    .unpair.2 0) :=
    (primrec_nthCode.comp
      (Nat.Primrec.pair hcomp (Nat.Primrec.pair Nat.Primrec.right (Nat.Primrec.const
    0)))).of_eq
      fun s => by simp
  exact hnth.of_eq fun s =>
    autStateCardFuelChar_fuelTable_eq s.unpair.1 s.unpair.2 s.unpair.2 (le_refl _)
end

section

theorem primrec_decodeFuelOkChar2 : Nat.Primrec (fun s => decodeFuelOkChar s.unpair.1
    s.unpair.2) := by
  have hft := primrec_fuelTable primrec_decodeFuelOkCharLookup
  have hpack : Nat.Primrec (fun s : ℕ => Nat.pair s.unpair.2 s.unpair.1) :=
    Nat.Primrec.pair Nat.Primrec.right Nat.Primrec.left
  have hcomp : Nat.Primrec (fun s => fuelTable decodeFuelOkCharLookup s.unpair.2 s.
    unpair.1) :=
    (hft.comp hpack).of_eq fun s => by simp
  have hnth : Nat.Primrec
      (fun s => nthCode (fuelTable decodeFuelOkCharLookup s.unpair.2 s.unpair.1) s.
    unpair.2 0) :=
    (primrec_nthCode.comp
      (Nat.Primrec.pair hcomp (Nat.Primrec.pair Nat.Primrec.right (Nat.Primrec.const
    0)))).of_eq
      fun s => by simp
  exact hnth.of_eq fun s => decodeFuelOkChar_fuelTable_eq s.unpair.1 s.unpair.2 s.
    unpair.2 (le_refl _)
end

section
theorem primrec_halfParity : Nat.Primrec halfParity := by
  have hIH : Nat.Primrec (fun w => w.unpair.2.unpair.2) := Nat.Primrec.right.comp Nat.
    Primrec.right
  have hstep : Nat.Primrec (fun w => Nat.pair (w.unpair.2.unpair.2.unpair.1 + w.unpair
    .2.unpair.2.unpair.2)
```

```
      (1 - w.unpair.2.unpair.2.unpair.2)) :=
    (primrec_add₂ (Nat.Primrec.left.comp hIH) (Nat.Primrec.right.comp hIH)).pair
      (primrec_sub₂ (Nat.Primrec.const 1) (Nat.Primrec.right.comp hIH))
  refine ((Nat.Primrec.prec (Nat.Primrec.const 0) hstep).comp
    ((Nat.Primrec.const 0).pair primrec_id)).of_eq (fun n => ?_)
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]
  rfl
end

section
theorem primrec_div2 : Nat.Primrec (fun n => n / 2) :=
  (Nat.Primrec.left.comp primrec_halfParity).of_eq fun n => by
    rw [halfParity_spec, unpair_pair_fst]
end

section

theorem primrec_ite {c t f : ℕ → ℕ} (hc : Nat.Primrec c) (ht : Nat.Primrec t) (hf :
    Nat.Primrec f) :
    Nat.Primrec (fun n => selectFn (c n) (t n) (f n)) :=
  primrec_selectFn hc ht hf
end

section
theorem primrec_mapPairStp : Nat.Primrec mapPairStp := by
  have h1 : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have h21 : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have h22 : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  exact (Nat.Primrec.succ.comp ((h22.pair h1).pair h21)).of_eq (fun _ => rfl)
end

section
theorem primrec_mapPairCode : Nat.Primrec (fun t => mapPairCode t.unpair.1 t.unpair.2)
     :=
  (primrec_foldCode primrec_mapPairStp Nat.Primrec.left (Nat.Primrec.const 0)
    Nat.Primrec.right).of_eq (fun _ => rfl)
end

section

theorem REPred.forall_mem_decodeList₂ {p : ℕ → ℕ → Prop} (hp : REPred₂ p) :
    REPred (fun t => ∀ e ∈ decodeList t.unpair.2, p t.unpair.1 e) := by
  have hp' : REPred (fun s => p s.unpair.1 s.unpair.2) := hp
  have hbase : REPred (fun c => ∀ e' ∈ decodeList c, p e'.unpair.1 e'.unpair.2) :=
    hp'.forall_mem_decodeList
  refine REPred.of_iff (fun t => ?_) (hbase.comp primrec_mapPairCode)
  rw [decodeList_mapPairCode]
  simp only [List.mem_reverse, List.mem_map]
  constructor
  · rintro hall e' ⟨e, he, rfl⟩
    simp only [unpair_pair_fst, unpair_pair_snd]
    exact hall e he
  · intro hall e he
    simpa only [unpair_pair_fst, unpair_pair_snd]
```

```
      using hall (Nat.pair t.unpair.1 e) ⟨e, he, rfl⟩
end

section
theorem primrec_matchesBCatGLookup : Nat.Primrec matchesBCatGLookup := by
  have hi : Nat.Primrec (fun w => w.unpair.2.unpair.1) := Nat.Primrec.left.comp Nat.
    Primrec.right
  have hc : Nat.Primrec (fun w => w.unpair.2.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hcw : Nat.Primrec (fun w => w.unpair.2.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have ha : Nat.Primrec (fun w => w.unpair.2.unpair.2.unpair.1.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp (Nat.Primrec.right.comp hc)
  have hb : Nat.Primrec (fun w => w.unpair.2.unpair.2.unpair.1.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp (Nat.Primrec.right.comp hc)
  have htake : Nat.Primrec (fun w => takeCode w.unpair.2.unpair.1 w.unpair.2.unpair.2.
    unpair.2) :=
    (primrec_takeCode.comp (Nat.Primrec.pair hi hcw)).of_eq fun w => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hdrop : Nat.Primrec (fun w => dropCode w.unpair.2.unpair.1 w.unpair.2.unpair.2.
    unpair.2) :=
    (primrec_dropCode.comp (Nat.Primrec.pair hi hcw)).of_eq fun w => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have h1 : Nat.Primrec (fun w => nthCode w.unpair.1
      (Nat.pair w.unpair.2.unpair.2.unpair.1.unpair.2.unpair.1
        (takeCode w.unpair.2.unpair.1 w.unpair.2.unpair.2.unpair.2)) 0) :=
    (primrec_nthCode.comp (Nat.Primrec.pair Nat.Primrec.left
      (Nat.Primrec.pair (Nat.Primrec.pair ha htake) (Nat.Primrec.const 0)))).of_eq fun
     w => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have h2 : Nat.Primrec (fun w => nthCode w.unpair.1
      (Nat.pair w.unpair.2.unpair.2.unpair.1.unpair.2.unpair.2
        (dropCode w.unpair.2.unpair.1 w.unpair.2.unpair.2.unpair.2)) 0) :=
    (primrec_nthCode.comp (Nat.Primrec.pair Nat.Primrec.left
      (Nat.Primrec.pair (Nat.Primrec.pair hb hdrop) (Nat.Primrec.const 0)))).of_eq fun
     w => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  exact (primrec_mul₂ h1 h2).of_eq fun w => by
    dsimp [matchesBCatGLookup, matchesBCatG, mulBit]
end

section
theorem primrec_matchesBChar : ∀ fuel, Nat.Primrec (fun t => matchesBChar fuel t.unpair
    .1 t.unpair.2)
  | 0 => Nat.Primrec.const 0
  | fuel + 1 => by
    simpa [matchesBChar] using
      primrec_matchesBCharBody (primrec_matchesBChar fuel)
end

section
theorem primrec_decideNonemptyBChar (fuel : ℕ) :
    Nat.Primrec (fun c_e => decideNonemptyBChar fuel c_e) := by
  have hg : Nat.Primrec (fun w =>
      mulBit (allBinDigitsChar w.unpair.1) (matchesBChar fuel w.unpair.2 w.unpair.1))
    :=
```

```
    (primrec_mulBit.comp (Nat.Primrec.pair (primrec_allBinDigitsChar.comp Nat.Primrec.
    left)
      ((primrec_matchesBChar fuel).comp (Nat.Primrec.pair Nat.Primrec.right Nat.
    Primrec.left)))).of_eq
      fun w => by simp
  have hpack : Nat.Primrec (fun c_e =>
      Nat.pair c_e (codeBound (autStateCardFuelChar fuel c_e))) :=
    Nat.Primrec.pair Nat.Primrec.id
      (primrec_codeBound.comp (primrec_autStateCardFuelChar fuel))
  refine ((primrec_bExistsFn hg).comp hpack).of_eq fun c_e => ?_
  simp [decideNonemptyBChar]
end

section
theorem primrec_consistentBChar (fuel : ℕ) :
    Nat.Primrec (fun t => consistentBChar fuel t.unpair.1 t.unpair.2) :=
  (primrec_decideNonemptyBChar fuel).comp
    (Nat.Primrec.pair (Nat.Primrec.const 3)
      (Nat.Primrec.pair Nat.Primrec.left Nat.Primrec.right))
end

section
set_option maxHeartbeats 4000000 in
theorem primrec_matchesBCharBodyLookup : Nat.Primrec matchesBCharBodyLookup := by
  have htable : Nat.Primrec (fun w => w.unpair.1) := Nat.Primrec.left
  have hc : Nat.Primrec (fun w => w.unpair.2.unpair.1) := Nat.Primrec.left.comp Nat.
    Primrec.right
  have hcw : Nat.Primrec (fun w => w.unpair.2.unpair.2) := Nat.Primrec.right.comp Nat.
    Primrec.right
  have htag : Nat.Primrec (fun w => w.unpair.2.unpair.1.unpair.1) := Nat.Primrec.left.
    comp hc
  have h01 := primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 1) htag)
  have h12 := primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 2) htag)
  have h23 := primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 3) htag)
  have h34 := primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 4) htag)
  have hf1 : Nat.Primrec (fun w => listEqChar w.unpair.2.unpair.2 w.unpair.2.unpair.1.
    unpair.2) :=
    (primrec_listEqChar.comp (Nat.Primrec.pair hcw (Nat.Primrec.right.comp hc))).of_eq
     fun w => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hg : Nat.Primrec (fun w'' => matchesBCatGLookup
      (Nat.pair w''.unpair.2.unpair.1 (Nat.pair w''.unpair.1 w''.unpair.2.unpair.2)))
    :=
    (primrec_matchesBCatGLookup.comp (Nat.Primrec.pair (Nat.Primrec.left.comp Nat.
    Primrec.right)
      (Nat.Primrec.pair Nat.Primrec.left (Nat.Primrec.right.comp Nat.Primrec.right))))
    .of_eq
      fun _ => rfl
  have hcatpack : Nat.Primrec (fun w => Nat.pair
      (Nat.pair w.unpair.1 (Nat.pair w.unpair.2.unpair.1 w.unpair.2.unpair.2))
      (listLenChar w.unpair.2.unpair.2 + 1)) :=
    Nat.Primrec.pair (Nat.Primrec.pair htable (Nat.Primrec.pair hc hcw))
      (primrec_add₂ (primrec_listLenChar.comp hcw) (Nat.Primrec.const 1))
  have hcat : Nat.Primrec (fun w => bExistsFn
      (fun w'' => matchesBCatGLookup
        (Nat.pair w''.unpair.2.unpair.1 (Nat.pair w''.unpair.1 w''.unpair.2.unpair.2))
```

```
  )
    (Nat.pair w.unpair.1 (Nat.pair w.unpair.2.unpair.1 w.unpair.2.unpair.2))
    (listLenChar w.unpair.2.unpair.2 + 1)) :=
  ((primrec_bExistsFn hg).comp hcatpack).of_eq fun w => by
    simp only [unpair_pair_fst, unpair_pair_snd]
have ha : Nat.Primrec (fun w => w.unpair.2.unpair.1.unpair.2.unpair.1) :=
  Nat.Primrec.left.comp (Nat.Primrec.right.comp hc)
have hb : Nat.Primrec (fun w => w.unpair.2.unpair.1.unpair.2.unpair.2) :=
  Nat.Primrec.right.comp (Nat.Primrec.right.comp hc)
have hlk1 : Nat.Primrec (fun w => nthCode w.unpair.1
    (Nat.pair w.unpair.2.unpair.1.unpair.2.unpair.1 w.unpair.2.unpair.2) 0) :=
  (primrec_nthCode.comp (Nat.Primrec.pair htable


    (Nat.Primrec.pair (Nat.Primrec.pair ha hcw) (Nat.Primrec.const 0)))).of_eq fun w
   => by
    simp only [unpair_pair_fst, unpair_pair_snd]
have hlk2 : Nat.Primrec (fun w => nthCode w.unpair.1
    (Nat.pair w.unpair.2.unpair.1.unpair.2.unpair.2 w.unpair.2.unpair.2) 0) :=
  (primrec_nthCode.comp (Nat.Primrec.pair htable
    (Nat.Primrec.pair (Nat.Primrec.pair hb hcw) (Nat.Primrec.const 0)))).of_eq fun w
   => by
    simp only [unpair_pair_fst, unpair_pair_snd]
have hcap := primrec_mul₂ hlk1 hlk2
refine (primrec_selectFn h01 (Nat.Primrec.const 1)
  (primrec_selectFn h12 hf1
    (primrec_selectFn h23 hcat
      (primrec_selectFn h34 hcap (Nat.Primrec.const 0))))).of_eq fun w => ?_
show _ = matchesBCharBody (fun p' => nthCode w.unpair.1 p' 0) w.unpair.2.unpair.1 w.
  unpair.2.unpair.2
rw [matchesBCharBody_eq]
match tag : w.unpair.2.unpair.1.unpair.1 with
| 0 =>
  have h10 : (1 - 0 : ℕ) = 1 := rfl
  simp only [h10, isOne_one, selectFn_one]
| 1 =>
  have h01' : (1 - 1 : ℕ) = 0 := rfl
  have h12' : (2 - 1 : ℕ) = 1 := rfl
  simp only [h01', h12', isOne_zero, isOne_one, selectFn_zero, selectFn_one]
| 2 =>
  have h01' : (1 - 2 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
  have h12' : (2 - 2 : ℕ) = 0 := rfl
  have h23' : (3 - 2 : ℕ) = 1 := rfl
  simp only [h01', h23', isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  apply eq_of_le_one_iff_one (bExistsFn_le_one _ _ _) (bExistsFn_le_one _ _ _)
  rw [bExistsFn_eq_one_iff, bExistsFn_eq_one_iff]
  refine exists_congr fun i => and_congr_right fun _ => ?_
  simp only [matchesBCatGLookup, unpair_pair_fst, unpair_pair_snd]
| 3 =>
  have h01' : (1 - 3 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
  have h12' : (2 - 3 : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
  have h23' : (3 - 3 : ℕ) = 0 := rfl
  have h34' : (4 - 3 : ℕ) = 1 := rfl
  simp only [h01', h34', isOne_zero, isOne_one, selectFn_zero, selectFn_one,
    mulBit]
| t + 4 =>
  have h01' : (1 - (t + 4) : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
```

```
    have h12' : (2 - (t + 4) : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h23' : (3 - (t + 4) : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h34' : (4 - (t + 4) : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    simp only [h01', h12', h23', h34', isOne_zero, selectFn_zero]
end

section

theorem primrec_matchesBChar2 :
    Nat.Primrec (fun s => matchesBChar s.unpair.1 s.unpair.2.unpair.1 s.unpair.2.
    unpair.2) := by
  have hft := primrec_fuelTable primrec_matchesBCharBodyLookup
  have hpack : Nat.Primrec (fun s : ℕ => Nat.pair s.unpair.2 s.unpair.1) :=
    Nat.Primrec.pair Nat.Primrec.right Nat.Primrec.left
  have hcomp : Nat.Primrec (fun s => fuelTable matchesBCharBodyLookup s.unpair.2 s.
    unpair.1) :=
    (hft.comp hpack).of_eq fun s => by simp
  have hnth : Nat.Primrec
      (fun s => nthCode (fuelTable matchesBCharBodyLookup s.unpair.2 s.unpair.1) s.
    unpair.2 0) :=
    (primrec_nthCode.comp
      (Nat.Primrec.pair hcomp (Nat.Primrec.pair Nat.Primrec.right (Nat.Primrec.const
    0)))).of_eq
      fun s => by simp
  exact hnth.of_eq fun s => by
    rw [matchesBChar_fuelTable_eq s.unpair.1 s.unpair.2 s.unpair.2 (le_refl _)]
end

section
theorem primrec_decideNonemptyBChar2 :
    Nat.Primrec (fun s => decideNonemptyBChar s.unpair.1 s.unpair.2) := by
  have hg : Nat.Primrec (fun u => mulBit (allBinDigitsChar u.unpair.2.unpair.1)
      (matchesBChar u.unpair.1 u.unpair.2.unpair.2 u.unpair.2.unpair.1)) :=
    (primrec_mulBit.comp (Nat.Primrec.pair
      (primrec_allBinDigitsChar.comp (Nat.Primrec.left.comp Nat.Primrec.right))
      (primrec_matchesBChar2.comp (Nat.Primrec.pair Nat.Primrec.left
        (Nat.Primrec.pair (Nat.Primrec.right.comp Nat.Primrec.right)
          (Nat.Primrec.left.comp Nat.Primrec.right)))))).of_eq fun u => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hbe := primrec_bExistsFn_param hg
  have hpack : Nat.Primrec (fun s => Nat.pair (Nat.pair s.unpair.1 s.unpair.2)
      (codeBound (autStateCardFuelChar s.unpair.1 s.unpair.2))) :=
    Nat.Primrec.pair (Nat.Primrec.pair Nat.Primrec.left Nat.Primrec.right)
      (primrec_codeBound.comp primrec_autStateCardFuelChar2)
  exact (hbe.comp hpack).of_eq fun s => by
    simp only [unpair_pair_fst, unpair_pair_snd, decideNonemptyBChar]
end

section

theorem primrec_consistentBChar2 :
    Nat.Primrec (fun s => consistentBChar s.unpair.1 s.unpair.2.unpair.1 s.unpair.2.
    unpair.2) := by
  have hpack : Nat.Primrec (fun s => Nat.pair s.unpair.1
      (Nat.pair 3 (Nat.pair s.unpair.2.unpair.1 s.unpair.2.unpair.2))) :=
    Nat.Primrec.pair Nat.Primrec.left
```

```
      (Nat.Primrec.pair (Nat.Primrec.const 3)
        (Nat.Primrec.pair (Nat.Primrec.left.comp Nat.Primrec.right)
          (Nat.Primrec.right.comp Nat.Primrec.right)))
  exact (primrec_decideNonemptyBChar2.comp hpack).of_eq fun s => by
    simp only [unpair_pair_fst, unpair_pair_snd, consistentBChar, capCode]
end

section

theorem primrec_max {f g : ℕ → ℕ} (hf : Nat.Primrec f) (hg : Nat.Primrec g) :
    Nat.Primrec (fun n => Nat.max (f n) (g n)) := by
  refine (primrec_selectFn (primrec_le hf hg) hg hf).of_eq fun n => by
    unfold selectFn isZero Nat.max
    by_cases h : f n ≤ g n
    · simp [Nat.sub_eq_zero_iff_le.mpr h, Nat.max_eq_right h]
    · have hlt : g n < f n := Nat.lt_of_not_ge h
      have hpos : 0 < f n - g n := Nat.sub_pos_of_lt hlt
      have hmin : min (f n - g n) 1 = 1 := Nat.min_eq_right (Nat.succ_le_iff.mpr hpos)
      simp [hmin, Nat.max_eq_left (Nat.le_of_lt hlt)]
end

section

theorem primrec_max_one : Nat.Primrec (fun n => Nat.max n 1) := by
  refine (primrec_selectFn (primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 1)
    primrec_id))
    (Nat.Primrec.const 1) primrec_id).of_eq fun n => by
    unfold selectFn isOne Nat.max
    rcases n with _ | n <;> simp
end

section
theorem primrec_mod2 : Nat.Primrec (fun n => n % 2) :=
  (Nat.Primrec.right.comp primrec_halfParity).of_eq fun n => by
    rw [halfParity_spec, unpair_pair_snd]
end

section
theorem primrec_lowOr : Nat.Primrec (fun t => lowOr t.unpair.1 t.unpair.2) := by
  have hx : Nat.Primrec (fun t : ℕ => t.unpair.1 % 2) := primrec_mod2.comp Nat.Primrec
    .left
  have hy : Nat.Primrec (fun t : ℕ => t.unpair.2 % 2) := primrec_mod2.comp Nat.Primrec
    .right
  exact (primrec_sub₂ (Nat.Primrec.const 1)
    (primrec_sub₂ (Nat.Primrec.const 1) (primrec_add₂ hx hy))).of_eq fun _ => rfl
end

section
theorem primrec_lorStep : Nat.Primrec lorStep := by
  have hA : Nat.Primrec (fun s : ℕ => s.unpair.1.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.left
  have hB : Nat.Primrec (fun s : ℕ => s.unpair.1.unpair.2) := Nat.Primrec.right.comp
    Nat.Primrec.left
  have hW : Nat.Primrec (fun s : ℕ => s.unpair.2.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.right
  have hAcc : Nat.Primrec (fun s : ℕ => s.unpair.2.unpair.2) := Nat.Primrec.right.comp
```

```
    Nat.Primrec.right
  have hlow : Nat.Primrec (fun s : ℕ => lowOr s.unpair.1.unpair.1 s.unpair.1.unpair.2)
    :=
    (primrec_lowOr.comp (hA.pair hB)).of_eq fun s => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  exact (((primrec_div2.comp hA).pair (primrec_div2.comp hB)).pair
    ((primrec_mul₂ (Nat.Primrec.const 2) hW).pair
      (primrec_add₂ hAcc (primrec_mul₂ hW hlow)))).of_eq fun _ => rfl
end

section

theorem primrec_myLor : Nat.Primrec (fun t => myLor t.unpair.1 t.unpair.2) := by
  have hbase : Nat.Primrec
      (fun z => Nat.pair (Nat.pair z.unpair.1 z.unpair.2) (Nat.pair 1 0)) :=
    (Nat.Primrec.left.pair Nat.Primrec.right).pair
      ((Nat.Primrec.const 1).pair (Nat.Primrec.const 0))
  have hstep : Nat.Primrec (fun w => lorStep w.unpair.2.unpair.2) :=
    primrec_lorStep.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hprec := Nat.Primrec.prec hbase hstep
  have hcount : Nat.Primrec (fun t => t.unpair.1 + t.unpair.2) :=
    primrec_add₂ Nat.Primrec.left Nat.Primrec.right
  refine ((Nat.Primrec.right.comp Nat.Primrec.right).comp
    (hprec.comp (primrec_id.pair hcount))).of_eq fun t => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]
  rw [rec_const_iterate]
  rfl
end

section

theorem recDecidable_of_forall {p : ℕ → Prop} (h : ∀ n, p n) : RecDecidable p :=
  ⟨fun _ => 1, Nat.Primrec.const 1, fun n => ⟨fun _ => rfl, fun _ => h n⟩⟩
end

section

theorem rePred_of_forall {p : ℕ → Prop} (h : ∀ n, p n) : REPred p :=
  (recDecidable_of_forall h).re
end

section

theorem recDecidable₂_of_forall {r : ℕ → ℕ → Prop} (h : ∀ n m, r n m) : RecDecidable₂
    r :=
  recDecidable_of_forall (fun t => h t.unpair.1 t.unpair.2)
end

section

theorem recPow_eq (b : ℕ) :
    ∀ e, Nat.rec (motive := fun _ => ℕ) 1 (fun _ ih => ih * b) e = b ^ e
  | 0 => (pow_zero b).symm
  | e + 1 => by rw [pow_succ]; exact congrArg (· * b) (recPow_eq b e)
end
```

```
section

theorem primrec_pow : Nat.Primrec (Nat.unpaired fun b e => b ^ e) := by
  have hg : Nat.Primrec (fun w => w.unpair.2.unpair.2 * w.unpair.1) :=
    primrec_mul₂ (Nat.Primrec.right.comp Nat.Primrec.right) Nat.Primrec.left
  refine (Nat.Primrec.prec (Nat.Primrec.const 1) hg).of_eq (fun p => ?_)
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]
  exact recPow_eq p.unpair.1 p.unpair.2
end

section

theorem primrec_pow₂ {f g : ℕ → ℕ} (hf : Nat.Primrec f) (hg : Nat.Primrec g) :
    Nat.Primrec (fun n => f n ^ g n) :=
  (primrec_pow.comp (hf.pair hg)).of_eq fun n => by
    simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]
end

section
theorem primrec_subsetBChar :
    Nat.Primrec (fun s => subsetBChar s.unpair.1 s.unpair.2.unpair.1 s.unpair.2.unpair
    .2) := by
  have hg : Nat.Primrec (fun u => selectFn
      (subsetGuardChar u.unpair.1 u.unpair.2.unpair.2.unpair.1 u.unpair.2.unpair.2.
    unpair.2
        u.unpair.2.unpair.1)
      (selectFn (matchesBChar u.unpair.1 u.unpair.2.unpair.2.unpair.1 u.unpair.2.
    unpair.1)
        (matchesBChar u.unpair.1 u.unpair.2.unpair.2.unpair.2 u.unpair.2.unpair.1) 1)
    1) := by
    have hfuel : Nat.Primrec (fun u : ℕ => u.unpair.1) := Nat.Primrec.left
    have hi : Nat.Primrec (fun u : ℕ => u.unpair.2.unpair.1) :=
      Nat.Primrec.left.comp Nat.Primrec.right
    have hc1 : Nat.Primrec (fun u : ℕ => u.unpair.2.unpair.2.unpair.1) :=
      Nat.Primrec.left.comp (Nat.Primrec.right.comp Nat.Primrec.right)
    have hc2 : Nat.Primrec (fun u : ℕ => u.unpair.2.unpair.2.unpair.2) :=
      Nat.Primrec.right.comp (Nat.Primrec.right.comp Nat.Primrec.right)
    have hguard : Nat.Primrec (fun u => subsetGuardChar u.unpair.1 u.unpair.2.unpair
    .2.unpair.1
        u.unpair.2.unpair.2.unpair.2 u.unpair.2.unpair.1) := by
      have hbound : Nat.Primrec (fun u => subsetBoundChar u.unpair.1
          u.unpair.2.unpair.2.unpair.1 u.unpair.2.unpair.2.unpair.2) := by
        have h1 : Nat.Primrec (fun u => autStateCardFuelChar u.unpair.1
            u.unpair.2.unpair.2.unpair.1) := by
          have := primrec_autStateCardFuelChar2
          exact (this.comp (Nat.Primrec.pair hfuel hc1)).of_eq fun u => by
            simp only [unpair_pair_fst, unpair_pair_snd]
        have h2 : Nat.Primrec (fun u => autStateCardFuelChar u.unpair.1
            u.unpair.2.unpair.2.unpair.2) := by
          have := primrec_autStateCardFuelChar2
          exact (this.comp (Nat.Primrec.pair hfuel hc2)).of_eq fun u => by
            simp only [unpair_pair_fst, unpair_pair_snd]
        exact (primrec_mul₂ (primrec_pow₂ (Nat.Primrec.const 2) h1)
          (primrec_pow₂ (Nat.Primrec.const 2) h2))
      exact (primrec_mulBit.comp (Nat.Primrec.pair
        (primrec_allBinDigitsChar.comp hi)
```

```
        (primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 1)
          (primrec_sub₂ (primrec_listLenChar.comp hi) hbound))))).of_eq fun u => by
        simp only [unpair_pair_fst, unpair_pair_snd, subsetGuardChar, mulBit]
    have hm1 : Nat.Primrec (fun u => matchesBChar u.unpair.1 u.unpair.2.unpair.2.
    unpair.1
        u.unpair.2.unpair.1) := by
      have := primrec_matchesBChar2
      exact (this.comp (Nat.Primrec.pair hfuel (Nat.Primrec.pair hc1 hi))).of_eq fun u
     => by
        simp only [unpair_pair_fst, unpair_pair_snd]
    have hm2 : Nat.Primrec (fun u => matchesBChar u.unpair.1 u.unpair.2.unpair.2.
    unpair.2
        u.unpair.2.unpair.1) := by
      have := primrec_matchesBChar2
      exact (this.comp (Nat.Primrec.pair hfuel (Nat.Primrec.pair hc2 hi))).of_eq fun u
     => by
        simp only [unpair_pair_fst, unpair_pair_snd]
    exact primrec_selectFn hguard (primrec_selectFn hm1 hm2 (Nat.Primrec.const 1))
      (Nat.Primrec.const 1)
  have hb := primrec_bForallFn_param hg
  have hpack : Nat.Primrec (fun s => Nat.pair
      (Nat.pair s.unpair.1 (Nat.pair s.unpair.2.unpair.1 s.unpair.2.unpair.2))
      (codeBound (subsetBoundChar s.unpair.1 s.unpair.2.unpair.1 s.unpair.2.unpair.2))
    ) := by
    have hfuel : Nat.Primrec (fun s : ℕ => s.unpair.1) := Nat.Primrec.left
    have hc1 : Nat.Primrec (fun s : ℕ => s.unpair.2.unpair.1) :=
      Nat.Primrec.left.comp Nat.Primrec.right
    have hc2 : Nat.Primrec (fun s : ℕ => s.unpair.2.unpair.2) :=
      Nat.Primrec.right.comp Nat.Primrec.right
    have h1 : Nat.Primrec (fun s => autStateCardFuelChar s.unpair.1 s.unpair.2.unpair
    .1) := by
      have := primrec_autStateCardFuelChar2
      exact (this.comp (Nat.Primrec.pair hfuel hc1)).of_eq fun s => by
        simp only [unpair_pair_fst, unpair_pair_snd]
    have h2 : Nat.Primrec (fun s => autStateCardFuelChar s.unpair.1 s.unpair.2.unpair
    .2) := by
      have := primrec_autStateCardFuelChar2
      exact (this.comp (Nat.Primrec.pair hfuel hc2)).of_eq fun s => by
        simp only [unpair_pair_fst, unpair_pair_snd]
    have hbnd : Nat.Primrec (fun s => subsetBoundChar s.unpair.1 s.unpair.2.unpair.1
        s.unpair.2.unpair.2) :=
      primrec_mul₂ (primrec_pow₂ (Nat.Primrec.const 2) h1) (primrec_pow₂ (Nat.Primrec.
    const 2) h2)
    exact Nat.Primrec.pair (Nat.Primrec.pair hfuel (Nat.Primrec.pair hc1 hc2))
      (primrec_codeBound.comp hbnd)
  exact (hb.comp hpack).of_eq fun s => by
    simp only [unpair_pair_fst, unpair_pair_snd, subsetBChar]
end

section
theorem primrec_interEqChar :
    Nat.Primrec (fun s => interEqChar s.unpair.1 s.unpair.2.unpair.1 s.unpair.2.unpair
    .2) := by
  have hswap : Nat.Primrec (fun s : ℕ =>
      Nat.pair s.unpair.1 (Nat.pair s.unpair.2.unpair.2 s.unpair.2.unpair.1)) :=
    Nat.Primrec.pair Nat.Primrec.left
```

```
      (Nat.Primrec.pair (Nat.Primrec.right.comp Nat.Primrec.right)
        (Nat.Primrec.left.comp Nat.Primrec.right))
  have h1 := primrec_subsetBChar
  have h2 : Nat.Primrec (fun s => subsetBChar s.unpair.1 s.unpair.2.unpair.2 s.unpair
    .2.unpair.1) :=
    (primrec_subsetBChar.comp hswap).of_eq fun s => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  exact (primrec_mulBit.comp (Nat.Primrec.pair h1 h2)).of_eq fun s => by
    simp only [unpair_pair_fst, unpair_pair_snd, interEqChar]
end

section

theorem primrec_two_pow {g : ℕ → ℕ} (hg : Nat.Primrec g) : Nat.Primrec (fun n => 2 ^
    g n) :=
  (primrec_pow.comp ((Nat.Primrec.const 2).pair hg)).of_eq fun n => by
    simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]
end

section
theorem selectFn_isOne_one_sub_sigma (u : ℕ) :
    selectFn (isOne (1 - u)) 1 0 = 1 ↔ u = 0 := by
  constructor
  · intro h
    by_cases hu : u = 0
    · exact hu
    · have : isOne (1 - u) = 0 := isOne_of_ne_one (by omega)
      simp [this, selectFn_zero] at h
  · intro hu
    subst hu
    simp [isOne_one, selectFn_one]
end

section
theorem subsetBChar_le_one (fuel c1 c2 : ℕ) : subsetBChar fuel c1 c2 ≤ 1 := by
  unfold subsetBChar; exact bForallFn_le_one _ _ _
end

section
theorem interEqChar_le_one (fuel c1 c2 : ℕ) : interEqChar fuel c1 c2 ≤ 1 := by
  unfold interEqChar; exact mulBit_le_one (subsetBChar_le_one _ _ _) (
    subsetBChar_le_one _ _ _)
end

end Domain.Recursive
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive

section
variable {α : Type*}

structure ComputablePresentation (V : NeighborhoodSystem α) where

  X : ℕ → Set α

  mem_X : ∀ n, V.mem (X n)
```

```
  surj : ∀ {Y : Set α}, V.mem Y → ∃ n, X n = Y

  interEq_computable : RecDecidable₃ (fun n m k => X n ∩ X m = X k)

  cons_computable : RecDecidable₂ (fun n m => ∃ k, X k ⊆ X n ∩ X m)

  inter : ℕ → ℕ → ℕ

  inter_primrec : Nat.Primrec (fun t => inter t.unpair.1 t.unpair.2)

  inter_spec : ∀ {n m : ℕ}, (∃ k, X k ⊆ X n ∩ X m) → X (inter n m) = X n ∩ X m

  masterIdx : ℕ

  masterIdx_spec : X masterIdx = V.master

def NeighborhoodSystem.IsEffectivelyGiven (V : NeighborhoodSystem α) : Prop :=
  Nonempty (ComputablePresentation V)

namespace ComputablePresentation

variable {V : NeighborhoodSystem α} (P : ComputablePresentation V)

def inclShuffle (t : ℕ) : ℕ := Nat.pair t.unpair.1 (Nat.pair t.unpair.2 t.unpair.1)

def reindexInvolutive (P : ComputablePresentation V) (φ : ℕ → ℕ)
    (hφinv : Function.Involutive φ) (hφp : Nat.Primrec φ) : ComputablePresentation V
    where
  X n := P.X (φ n)
  mem_X n := P.mem_X (φ n)
  surj := fun {Y} hY => by
    obtain ⟨k, hk⟩ := P.surj hY
    exact ⟨φ k, by rw [hφinv k]; exact hk⟩
  interEq_computable := by
    have hreindex : Nat.Primrec (fun t : ℕ =>
        Nat.pair (φ t.unpair.1) (Nat.pair (φ t.unpair.2.unpair.1) (φ t.unpair.2.unpair
    .2))) :=
      (hφp.comp Nat.Primrec.left).pair
        ((hφp.comp (Nat.Primrec.left.comp Nat.Primrec.right)).pair
          (hφp.comp (Nat.Primrec.right.comp Nat.Primrec.right)))
    refine RecDecidable.of_iff (fun t => ?_) (P.interEq_computable.comp hreindex)
    simp only [unpair_pair_fst, unpair_pair_snd]
  cons_computable := by
    have hreindex : Nat.Primrec (fun t : ℕ =>
        Nat.pair (φ t.unpair.1) (φ t.unpair.2)) :=
      (hφp.comp Nat.Primrec.left).pair (hφp.comp Nat.Primrec.right)
    refine RecDecidable.of_iff (fun t => ?_) (P.cons_computable.comp hreindex)
    simp only [unpair_pair_fst, unpair_pair_snd]
    constructor
    · rintro ⟨k, hk⟩; exact ⟨φ k, hk⟩
    · rintro ⟨k, hk⟩; exact ⟨φ k, by rwa [hφinv]⟩
  inter n m := φ (P.inter (φ n) (φ m))
  inter_primrec := by
    have hreindex : Nat.Primrec (fun t : ℕ => Nat.pair (φ t.unpair.1) (φ t.unpair.2))
    :=
```

```
      (hφp.comp Nat.Primrec.left).pair (hφp.comp Nat.Primrec.right)
    exact (hφp.comp ((P.inter_primrec.comp hreindex))).of_eq

      (fun t => by simp only [unpair_pair_fst, unpair_pair_snd])
  inter_spec {n m} h := by
    show P.X (φ (φ (P.inter (φ n) (φ m)))) = P.X (φ n) ∩ P.X (φ m)
    rw [hφinv]
    obtain ⟨k, hk⟩ := h
    exact P.inter_spec ⟨φ k, hk⟩
  masterIdx := φ P.masterIdx
  masterIdx_spec := by show P.X (φ (φ P.masterIdx)) = V.master; rw [hφinv]; exact P.
    masterIdx_spec

def swapPair (t : ℕ) : ℕ := Nat.pair t.unpair.2 t.unpair.1

end ComputablePresentation

end

section
variable {α : Type*}

def unitPresentation : ComputablePresentation unitSys where
  X _ := Set.univ
  mem_X _ := rfl
  surj := by rintro Y rfl; exact ⟨0, rfl⟩
  interEq_computable := recDecidable_of_forall fun _ => Set.inter_self Set.univ
  cons_computable := recDecidable_of_forall fun _ =>
    ⟨0, by rw [Set.inter_self]⟩
  inter _ _ := 0
  inter_primrec := Nat.Primrec.zero
  inter_spec _ := by rw [Set.inter_self]
  masterIdx := 0
  masterIdx_spec := rfl

namespace ComputablePresentation

variable {V : NeighborhoodSystem α} (P : ComputablePresentation V)

theorem primrec_inclShuffle : Nat.Primrec inclShuffle :=
  Nat.Primrec.pair Nat.Primrec.left (Nat.Primrec.pair Nat.Primrec.right Nat.Primrec.
    left)

private theorem primrec_swapPair : Nat.Primrec swapPair :=
  Nat.Primrec.pair Nat.Primrec.right Nat.Primrec.left

theorem incl_computable : RecDecidable₂ (fun n m => P.X n ⊆ P.X m) := by
  refine RecDecidable.of_iff (fun t => ?_) (P.interEq_computable.comp
    primrec_inclShuffle)
  simp only [inclShuffle, unpair_pair_fst, unpair_pair_snd]
  exact Set.inter_eq_left.symm

theorem eq_computable : RecDecidable₂ (fun n m => P.X n = P.X m) := by
  refine RecDecidable.of_iff (fun t => ?_)
    (P.incl_computable.and (P.incl_computable.comp primrec_swapPair))
  simp only [swapPair, unpair_pair_fst, unpair_pair_snd]
```

```
  exact Set.Subset.antisymm_iff

end ComputablePresentation

end

section
variable {α : Type*}

theorem unitSys_isEffectivelyGiven : unitSys.IsEffectivelyGiven :=
  ⟨unitPresentation⟩
end

namespace Exercise722
open Set Domain.Recursive

section

structure ConsistencyPresentation (V : NeighborhoodSystem α) where

  X : ℕ → Set α

  mem_X : ∀ n, V.mem (X n)

  surj : ∀ {Y : Set α}, V.mem Y → ∃ n, X n = Y

  cons_computable : RecDecidable₂ (fun n m => ∃ k, X k ⊆ X n ∩ X m)
end

end Exercise722
open NeighborhoodSystem Domain.Recursive ApproximableMap

end DomainTheory.NeighbourhoodSystems
end
```

DEFINITION 7.1. A neighbourhood system D has a *computable presentation* provided we can write

$$D = \{X_n \mid n \in N\},$$

where the following two relations

(i) $X_n \cap X_m = X_k$; and

(ii) $\exists k \in N.\, X_k \subseteq X_n$ and $X_k \subseteq X_m$

are recursively decidable (in integer indices n, m, k and in n, m, respectively). □

More strictly the sequence,

$$\langle X_n \rangle_{n=0}^{\infty},$$

is the presentation. Even more strictly, when it is required to cope with infinitely many domains at a time, it would be necessary to give the actual Gödel numbers of the recursive relations (i) and (ii) (rather than just saying there exists some way of showing them to be recursively decidable).

The intuitive idea of 7.1 is that the system is effectively given if you know how to do elementary "calculations" with neighbourhoods. The basic calculations are the forming of intersections. The neighbourhoods

have to be laid out in a systematic way; and, if we are asked for an intersection of two given neighbourhoods, we have to be able to locate it in the standard sequence. Relation (ii) is the *consistency condition* , which is the necessary and sufficient condition for the intersection to exist in D. When (ii) is true, therefore, we have only to try $k = 0, 1, 2, \ldots$ until we discover that we have found the intersection. We are

assuming that these basic decisions can be carried out in "finite time". Note that the obvious biconditional,

$$X_n \subseteq X_m \text{ iff } X_n \cap X_m = X_n,$$

assures us that the inclusion relation between neighbourhoods is itself decidable in terms of the indices. So in (ii) if k exists, *then* it (or the first one) can indeed be found in finite time. The rub is that if it *does not exist*, no finite number of inclusion checks will determine that fact. That is why we have to *assume* that (ii) is always decidable. The information contained in (ii) is a fundamental part of the neighbourhood structure. (An axiomatic characterization of neighbourhood structures is given in Exercise 7.13, which may make clearer what we are assuming and what a presentation is.)

3.8.3 Definition 7.2 — computable mapping

Definition_7_2.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_1

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive
open NeighborhoodSystem Domain.Recursive ApproximableMap
section
variable {α β ? : Type*}

class ComputableElement {W : NeighborhoodSystem β} (Q : ComputablePresentation W)
    (y : W.Element) : Prop where
  out : REPred (fun m => y.mem (Q.X m))

class ComputableMap {V : NeighborhoodSystem α} {W : NeighborhoodSystem β}
    (P : ComputablePresentation V) (Q : ComputablePresentation W) (f : ApproximableMap
     V W) : Prop where
  out : REPred₂ (fun n m => f.rel (P.X n) (Q.X m))

end

end DomainTheory.NeighbourhoodSystems
end
```

DEFINITION 7.2. Given two recursively presented domains,

$$\mathcal{D} = \{X_n \mid n \in \mathbf{N}\} \text{ and } E = \{Y_m \mid m \in \mathbf{N}\},$$

an approximable mapping $f : \mathcal{D} \to E$ is said to be *computable* iff the relation

$$X_n f Y_m$$

is recursively enumerable in n and m. □

The question to ask first is why "recursively enumerable" rather than "recursive" (= "recursively decidable")? The answer will become clear when we let $\mathcal{D}$ degenerate to the one-element domain, $\mathcal{D} = \{\Delta\}$. Then what we are considering is merely a single element

$$y = f(\{\Delta\}) \in |E|.$$

Therefore, 7.2 incorporates the notion of a *computable element* of a domain. And the condition reduces to the statement that the filter $y \in |E|$ is such that the set

$$\{m \in \mathbf{N} \mid Y_m \in y\}$$

is a recursively enumerable set of integers. The point is that the elements of $|E|$ are finite or infinite. If y were finite, the set of indices above would indeed be recursive in view of

our assumptions on E. But an infinite element can in general only be approximated "a little at a time". We cannot expect to know the whole story of its approximations in a flash. What it means to be recursively enumerable is that there is a primitive recursive function (hence, a total function), $r : \mathbf{N} \to \mathbf{N}$, such that

$$y = \{Y_{r(i)} \mid i \in \mathbf{N}\}.$$

That is to say, *all* the approximations to y can eventually be listed. In the case of the mapping f we could write

$$f = \{(X_{s(i)}, Y_{r(i)}) \mid i \in \mathbf{N}\},$$

for a suitable pair of primitive recursive functions s and r.

Definitions 7.1 and 7.2 may very well irritate the person hearing them for the first time: instead of explaining computability in direct terms, the whole question is thrown into the lap of recursion theory! There are several answers. "You have to start somewhere" is one thing I always say. Recursion on the integers is a well-understood theory, and we shall not need the refined parts of the development, fortunately. In any case, our definitions apply to *many* domains of quite different structure, not just to the domain $\mathbf{N}$. And the next step we shall take is to show how to build up computable functions (and also effectively given domains) from simpler ones. Thus, often it will not be necessary to go back to the seemingly over-precise definitions involving the indices but to appeal to some broad general principles.

3.8.4 Proposition 7.3 — computable maps form a category

Proposition_7_3.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_2

@[expose] public section
```

```
section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive
open NeighborhoodSystem Domain.Recursive ApproximableMap
section
variable {α β ? : Type*}
variable {V : NeighborhoodSystem α} {W : NeighborhoodSystem β}

theorem apply_isComputableElement {P : ComputablePresentation V} {Q :
    ComputablePresentation W}
    {f : ApproximableMap V W} (hf : ComputableMap P Q f) {x : V.Element}
    (hx : ComputableElement P x) : ComputableElement Q (f.toElementMap x) := by
  have hf' : REPred (fun s => f.rel (P.X s.unpair.1) (Q.X s.unpair.2)) := hf.out
  have hx' : REPred (fun n => x.mem (P.X n)) := hx.out
  constructor
  refine REPred.of_iff (fun m => ?_) ((hx'.comp Nat.Primrec.left).and hf').proj
  simp only [mem_toElementMap, unpair_pair_fst, unpair_pair_snd]
  constructor
  · rintro ⟨X, hX, hfX⟩
    obtain ⟨n, rfl⟩ := P.surj (x.sub hX)
    exact ⟨n, hX, hfX⟩
  · rintro ⟨n, hxn, hfn⟩
    exact ⟨P.X n, hxn, hfn⟩

theorem comp_isComputable {U : NeighborhoodSystem ?}
    {P : ComputablePresentation V} {Q : ComputablePresentation W} {R :
    ComputablePresentation U}
    {f : ApproximableMap V W} {g : ApproximableMap W U}
    (hf : ComputableMap P Q f) (hg : ComputableMap Q R g) :
    ComputableMap P R (g.comp f) := by
  constructor
  have hf' : REPred (fun s => f.rel (P.X s.unpair.1) (Q.X s.unpair.2)) := hf.out
  have hg' : REPred (fun s => g.rel (Q.X s.unpair.1) (R.X s.unpair.2)) := hg.out
  have hgf : Nat.Primrec (fun u => Nat.pair u.unpair.2.unpair.1 u.unpair.1) :=
    Nat.Primrec.pair (Nat.Primrec.left.comp Nat.Primrec.right) Nat.Primrec.left
  have hgg : Nat.Primrec (fun u => Nat.pair u.unpair.1 u.unpair.2.unpair.2) :=
    Nat.Primrec.pair Nat.Primrec.left (Nat.Primrec.right.comp Nat.Primrec.right)
  refine REPred.of_iff (fun t => ?_) ((hf'.comp hgf).and (hg'.comp hgg)).proj
  simp only [comp_rel, unpair_pair_fst, unpair_pair_snd]
  constructor
  · rintro ⟨Y, hfY, hgY⟩
    obtain ⟨l, rfl⟩ := Q.surj (g.rel_dom hgY)
    exact ⟨l, hfY, hgY⟩
  · rintro ⟨l, hfl, hgl⟩
    exact ⟨Q.X l, hfl, hgl⟩

theorem idMap_isComputable (P : ComputablePresentation V) :
    ComputableMap P P (idMap V) :=
  ⟨(RecDecidable.of_iff (fun t => by
    simp only [idMap_rel]
    exact ⟨fun h => h.2.2, fun h => ⟨P.mem_X _, P.mem_X _, h⟩⟩)
    P.incl_computable).re⟩

theorem principal_isComputableElement (P : ComputablePresentation V) (n : ℕ) :
    ComputableElement P (V.principal (P.mem_X n)) := by
  have hg : Nat.Primrec (fun m => Nat.pair n m) :=
```

```
    ((Nat.Primrec.const n).pair primrec_id).of_eq (fun _ => rfl)
  have hrec : RecDecidable (fun m => P.X n ⊆ P.X m) :=
    RecDecidable.of_iff (fun m => by simp only [unpair_pair_fst, unpair_pair_snd])
      (P.incl_computable.comp hg)
  constructor
  refine (RecDecidable.of_iff (fun m => ?_) hrec).re
  simp only [mem_principal]
  exact ⟨fun h => h.2, fun h => ⟨P.mem_X m, h⟩⟩

end

end DomainTheory.NeighbourhoodSystems
end
```

PROPOSITION 7.3. The identity map on an effectively given domain is computable; the composition of computable mappings on effectively given domains is again computable. □

The proofs for 7.3 are so trivial they are hardly worth an exercise. Note the immediate and useful consequence: if $f : D \to E$ is computable and $x \in |D|$ is computable, then $f(x) \in |E|$ is also computable. The next result is, however, worth working out even though it is quite easy.

3.8.5 Theorem 7.4 — sum and product effective

Theorem_7_4.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_7

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_3

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive Example61
open NeighborhoodSystem Domain.Recursive ApproximableMap
section
variable {α β ? α' β' : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

def prodPresentation (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)
    :
    ComputablePresentation (prod V₀ V₁) where
  X := prodEnum P₀ P₁
  mem_X t := prod_mem_prodNbhd (P₀.mem_X _) (P₁.mem_X _)
  surj := by
    rintro Z ⟨X, Y, hX, hY, rfl⟩
    obtain ⟨n, rfl⟩ := P₀.surj hX
    obtain ⟨m, rfl⟩ := P₁.surj hY
    exact ⟨Nat.pair n m, by simp only [prodEnum_apply, unpair_pair_fst, unpair_pair_snd
    ]⟩
  interEq_computable := by
```

```
  have hIE0 : RecDecidable (fun s => P₀.X s.unpair.1 ∩ P₀.X s.unpair.2.unpair.1
      = P₀.X s.unpair.2.unpair.2) := P₀.interEq_computable
  have hIE1 : RecDecidable (fun s => P₁.X s.unpair.1 ∩ P₁.X s.unpair.2.unpair.1
      = P₁.X s.unpair.2.unpair.2) := P₁.interEq_computable
  have hg0 : Nat.Primrec (fun t => Nat.pair t.unpair.1.unpair.1
      (Nat.pair t.unpair.2.unpair.1.unpair.1 t.unpair.2.unpair.2.unpair.1)) :=
    (Nat.Primrec.left.comp Nat.Primrec.left).pair
      ((Nat.Primrec.left.comp (Nat.Primrec.left.comp Nat.Primrec.right)).pair
        (Nat.Primrec.left.comp (Nat.Primrec.right.comp Nat.Primrec.right)))
  have hg1 : Nat.Primrec (fun t => Nat.pair t.unpair.1.unpair.2
      (Nat.pair t.unpair.2.unpair.1.unpair.2 t.unpair.2.unpair.2.unpair.2)) :=
    (Nat.Primrec.right.comp Nat.Primrec.left).pair
      ((Nat.Primrec.right.comp (Nat.Primrec.left.comp Nat.Primrec.right)).pair
        (Nat.Primrec.right.comp (Nat.Primrec.right.comp Nat.Primrec.right)))
  refine RecDecidable.of_iff (fun t => ?_) ((hIE0.comp hg0).and (hIE1.comp hg1))
  simp only [prodEnum_apply, unpair_pair_fst, unpair_pair_snd, prodNbhd_inter,
  prodNbhd_eq_iff]
cons_computable := by
  have hC0 : RecDecidable (fun s => ∃ k, P₀.X k ⊆ P₀.X s.unpair.1 ∩ P₀.X s.unpair.2)
  :=
    P₀.cons_computable
  have hC1 : RecDecidable (fun s => ∃ k, P₁.X k ⊆ P₁.X s.unpair.1 ∩ P₁.X s.unpair.2)
  :=
    P₁.cons_computable
  have hh0 : Nat.Primrec (fun t => Nat.pair t.unpair.1.unpair.1 t.unpair.2.unpair.1)
   :=
    (Nat.Primrec.left.comp Nat.Primrec.left).pair (Nat.Primrec.left.comp Nat.Primrec
  .right)
  have hh1 : Nat.Primrec (fun t => Nat.pair t.unpair.1.unpair.2 t.unpair.2.unpair.2)
   :=
    (Nat.Primrec.right.comp Nat.Primrec.left).pair (Nat.Primrec.right.comp Nat.
  Primrec.right)
  refine RecDecidable.of_iff (fun t => ?_) ((hC0.comp hh0).and (hC1.comp hh1))
  simp only [prodEnum_apply, unpair_pair_fst, unpair_pair_snd, prodNbhd_inter,
    prodNbhd_subset_iff]
  constructor
  · rintro ⟨k, hk0, hk1⟩
    exact ⟨⟨k.unpair.1, hk0⟩, ⟨k.unpair.2, hk1⟩⟩
  · rintro ⟨⟨k0, hk0⟩, ⟨k1, hk1⟩⟩
    exact ⟨Nat.pair k0 k1, by simpa only [unpair_pair_fst] using hk0,
      by simpa only [unpair_pair_snd] using hk1⟩
inter n m := Nat.pair (P₀.inter n.unpair.1 m.unpair.1) (P₁.inter n.unpair.2 m.unpair
  .2)
inter_primrec := by
  have h0 : Nat.Primrec (fun t => P₀.inter t.unpair.1.unpair.1 t.unpair.2.unpair.1)
  :=
    (P₀.inter_primrec.comp ((Nat.Primrec.left.comp Nat.Primrec.left).pair
      (Nat.Primrec.left.comp Nat.Primrec.right))).of_eq fun t => by
        simp only [unpair_pair_fst, unpair_pair_snd]
  have h1 : Nat.Primrec (fun t => P₁.inter t.unpair.1.unpair.2 t.unpair.2.unpair.2)
  :=
    (P₁.inter_primrec.comp ((Nat.Primrec.right.comp Nat.Primrec.left).pair
      (Nat.Primrec.right.comp Nat.Primrec.right))).of_eq fun t => by
        simp only [unpair_pair_fst, unpair_pair_snd]
  exact h0.pair h1
inter_spec := by
```

```
    rintro n m ⟨k, hk⟩
    simp only [prodEnum_apply, unpair_pair_fst, unpair_pair_snd] at hk ⊢
    rw [prodNbhd_inter] at hk ⊢
    obtain ⟨h0, h1⟩ := prodNbhd_subset_iff.mp hk
    rw [P₀.inter_spec ⟨_, h0⟩, P₁.inter_spec ⟨_, h1⟩]
  masterIdx := Nat.pair P₀.masterIdx P₁.masterIdx
  masterIdx_spec := by
    simp only [prodEnum_apply, unpair_pair_fst, unpair_pair_snd, P₀.masterIdx_spec,
      P₁.masterIdx_spec, prod_master]

@[simp] theorem prodPresentation_X (P₀ : ComputablePresentation V₀) (P₁ :
    ComputablePresentation V₁)
    (t : ℕ) :
    (prodPresentation P₀ P₁).X t = prodNbhd (P₀.X t.unpair.1) (P₁.X t.unpair.2) := rfl

section Sum

variable {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}

def sumEnum (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁) (t : ℕ) :
    Set (Option (α ? β)) :=
  if t.unpair.1 = 0 then inj₀ (P₀.X t.unpair.2)
  else if t.unpair.1 = 1 then inj₁ (P₁.X t.unpair.2)
  else sumMaster V₀ V₁

end Sum

section Sum

variable {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}

variable {P₀ : ComputablePresentation V₀} {P₁ : ComputablePresentation V₁}

@[simp] theorem sumEnum_zero {t : ℕ} (h : t.unpair.1 = 0) :
    sumEnum P₀ P₁ t = inj₀ (P₀.X t.unpair.2) := by unfold sumEnum; rw [ite_eq_left h]

@[simp] theorem sumEnum_one {t : ℕ} (h : t.unpair.1 = 1) :
    sumEnum P₀ P₁ t = inj₁ (P₁.X t.unpair.2) := by
  have h0 : t.unpair.1 = 0 := by omega
  unfold sumEnum; rw [ite_eq_right h0, ite_eq_left h]

theorem inj₀_eq_iff {A B : Set α} : (inj₀ A : Set (Option (α ? β))) = inj₀ B ↔ A = B
    :=
  ⟨inj₀_injective, fun h => h ▶ rfl⟩

theorem inj₀_eq_inj₁_elim {A : Set α} {B : Set β} (hA : A.Nonempty)
    (h : (inj₀ A : Set (Option (α ? β))) = inj₁ B) : False := by
  obtain ⟨a, ha⟩ := hA; exact il_mem_inj₁ (h ▶ il_mem_inj₀.mpr ha)

theorem inj₀_ne_inj₁_of_nonempty {A : Set α} {B : Set β} (hB : B.Nonempty) :
    (inj₀ A : Set (Option (α ? β))) = inj₁ B := by
  rintro h; obtain ⟨b, hb⟩ := hB
  exact ir_mem_inj₀ (h.symm ▶ ir_mem_inj₁.mpr hb)

theorem inj₀_ne_sumMaster {A : Set α} : (inj₀ A : Set (Option (α ? β))) = sumMaster V₀
    V₁ :=
```

```
  fun h => none_mem_inj₀ (h.symm ▸ none_mem_sumMaster)

theorem inj₁_eq_iff {A B : Set β} : (inj₁ A : Set (Option (α ⊕ β))) = inj₁ B ↔ A = B
    :=
  ⟨inj₁_injective, fun h => h ▸ rfl⟩

theorem inj₁_ne_sumMaster {B : Set β} : (inj₁ B : Set (Option (α ⊕ β))) = sumMaster V₀
    V₁ :=
  fun h => none_mem_inj₁ (h.symm ▸ none_mem_sumMaster)

theorem recDec_setEq₀ {f g : ℕ → ℕ} (hf : Nat.Primrec f) (hg : Nat.Primrec g) :
    RecDecidable (fun u => P₀.X (f u) = P₀.X (g u)) := by
  have hincl : RecDecidable (fun s => P₀.X s.unpair.1 ⊆ P₀.X s.unpair.2) := P₀.
    incl_computable
  refine RecDecidable.of_iff (fun u => ?_) ((hincl.comp (hf.pair hg)).and (hincl.comp
    (hg.pair hf)))
  simp only [unpair_pair_fst, unpair_pair_snd]
  exact ⟨fun h => ⟨h.subset, h.symm.subset⟩, fun ⟨h1, h2⟩ => Set.Subset.antisymm h1 h2⟩

theorem recDec_setEq₁ {f g : ℕ → ℕ} (hf : Nat.Primrec f) (hg : Nat.Primrec g) :
    RecDecidable (fun u => P₁.X (f u) = P₁.X (g u)) := by
  have hincl : RecDecidable (fun s => P₁.X s.unpair.1 ⊆ P₁.X s.unpair.2) := P₁.
    incl_computable
  refine RecDecidable.of_iff (fun u => ?_) ((hincl.comp (hf.pair hg)).and (hincl.comp
    (hg.pair hf)))
  simp only [unpair_pair_fst, unpair_pair_snd]
  exact ⟨fun h => ⟨h.subset, h.symm.subset⟩, fun ⟨h1, h2⟩ => Set.Subset.antisymm h1 h2⟩

theorem sumEnum_master {t : ℕ} (h0 : t.unpair.1 = 0) (h1 : t.unpair.1 = 1) :
    sumEnum P₀ P₁ t = sumMaster V₀ V₁ := by unfold sumEnum; rw [ite_eq_right h0,
    ite_eq_right h1]

theorem sumEnum_mem (t : ℕ) : (sum V₀ V₁ h₀ h₁).mem (sumEnum P₀ P₁ t) := by
  unfold sumEnum
  split
  · exact Or.inr (Or.inl ⟨_, P₀.mem_X _, rfl⟩)
  · split
    · exact Or.inr (Or.inr ⟨_, P₁.mem_X _, rfl⟩)
    · exact Or.inl rfl

include h₀ h₁ in
theorem sumEnum_nonempty (t : ℕ) : (sumEnum P₀ P₁ t).Nonempty := by
  unfold sumEnum
  split
  · exact inj₀_nonempty (h₀ _ (P₀.mem_X _))
  · split
    · exact inj₁_nonempty (h₁ _ (P₁.mem_X _))
    · exact ⟨none, none_mem_sumMaster⟩

theorem sumEnum_subset_sumMaster (n : ℕ) :
    sumEnum P₀ P₁ n ⊆ sumMaster V₀ V₁ := by
  unfold sumEnum
  split
  · exact inj₀_subset_sumMaster (P₀.mem_X _)
  · split
    · exact inj₁_subset_sumMaster (P₁.mem_X _)
```

```
    · exact subset_rfl

theorem sumEnum_inter_sumMaster (n : ℕ) :
    sumEnum P₀ P₁ n ∩ sumMaster V₀ V₁ = sumEnum P₀ P₁ n :=
  Set.inter_eq_left.mpr (sumEnum_subset_sumMaster n)

theorem sumMaster_inter_sumEnum (m : ℕ) :
    sumMaster V₀ V₁ ∩ sumEnum P₀ P₁ m = sumEnum P₀ P₁ m :=
  Set.inter_eq_right.mpr (sumEnum_subset_sumMaster m)

end Sum

theorem tag_trichotomy (n : ℕ) : n = 0 ∨ n = 1 ∨ (n = 0 ∧ n = 1) := by
  have h_dec : (n = 0) ∨ (n = 0) := by
    by_cases h : n = 0
    · exact Or.inr h
    · exact Or.inl h
  rcases h_dec with h | h
  · have h'_dec : (n = 1) ∨ (n = 1) := by
      by_cases h' : n = 1
      · exact Or.inr h'
      · exact Or.inl h'
    rcases h'_dec with h' | h'
    · exact Or.inr (Or.inr ⟨h, h'⟩)
    · exact Or.inr (Or.inl h')
  · exact Or.inl h

section Sum

variable {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}

variable {P₀ : ComputablePresentation V₀} {P₁ : ComputablePresentation V₁}

include h₁ in

theorem sumEnum_eq_iff (x y : ℕ) :
    sumEnum P₀ P₁ x = sumEnum P₀ P₁ y ↔
      ((x.unpair.1 = 0 ∧ x.unpair.1 = 1) ∧ (y.unpair.1 = 0 ∧ y.unpair.1 = 1))
        ∨ (((x.unpair.1 = 0 ∧ y.unpair.1 = 0) ∧ P₀.X x.unpair.2 = P₀.X y.unpair.2)
          ∨ ((x.unpair.1 = 1 ∧ y.unpair.1 = 1) ∧ P₁.X x.unpair.2 = P₁.X y.unpair.2)) :=
    by
  rcases tag_trichotomy x.unpair.1 with hx | hx | ⟨hx0, hx1⟩ <;>
    rcases tag_trichotomy y.unpair.1 with hy | hy | ⟨hy0, hy1⟩
  ·
    rw [sumEnum_zero hx, sumEnum_zero hy, inj₀_eq_iff]
    constructor
    · intro he; exact Or.inr (Or.inl ⟨⟨hx, hy⟩, he⟩)
    · rintro (⟨⟨e1, e2⟩, _⟩ | ⟨_, he⟩ | ⟨⟨e1, e2⟩, _⟩)
      · exfalso; omega
      · exact he
      · exfalso; omega
  ·
    rw [sumEnum_zero hx, sumEnum_one hy]
    constructor
    · intro h; exact absurd h (inj₀_ne_inj₁_of_nonempty (h₁ _ (P₁.mem_X _)))
    · rintro (⟨⟨e1, e2⟩, _⟩ | ⟨⟨e1, e2⟩, _⟩ | ⟨⟨e1, e2⟩, _⟩) <;> exfalso <;> omega
```

```
  .
    rw [sumEnum_zero hx, sumEnum_master hy0 hy1]
    constructor
    · intro h; exact absurd h inj₀_ne_sumMaster
    · rintro (⟨⟨e1, e2⟩, _⟩ | ⟨⟨e1, e2⟩, _⟩ | ⟨⟨e1, e2⟩, _⟩) <;> exfalso <;> omega
  .
    rw [sumEnum_one hx, sumEnum_zero hy]
    constructor
    · intro h; exact absurd h.symm (inj₀_ne_inj₁_of_nonempty (h₁ _ (P₁.mem_X _)))
    · rintro (⟨⟨e1, e2⟩, _⟩ | ⟨⟨e1, e2⟩, _⟩ | ⟨⟨e1, e2⟩, _⟩) <;> exfalso <;> omega
  .
    rw [sumEnum_one hx, sumEnum_one hy, inj₁_eq_iff]
    constructor
    · intro he; exact Or.inr (Or.inr ⟨⟨hx, hy⟩, he⟩)
    · rintro (⟨⟨e1, e2⟩, _⟩ | ⟨⟨e1, e2⟩, _⟩ | ⟨_, he⟩)
      · exfalso; omega
      · exfalso; omega
      · exact he
  .
    rw [sumEnum_one hx, sumEnum_master hy0 hy1]
    constructor
    · intro h; exact absurd h inj₁_ne_sumMaster
    · rintro (⟨⟨e1, e2⟩, _⟩ | ⟨⟨e1, e2⟩, _⟩ | ⟨⟨e1, e2⟩, _⟩) <;> exfalso <;> omega
  .
    rw [sumEnum_master hx0 hx1, sumEnum_zero hy]
    constructor
    · intro h; exact absurd h.symm inj₀_ne_sumMaster
    · rintro (⟨⟨e1, e2⟩, ⟨e3, e4⟩⟩ | ⟨⟨e1, e2⟩, _⟩ | ⟨⟨e1, e2⟩, _⟩) <;> exfalso <;> omega
  .
    rw [sumEnum_master hx0 hx1, sumEnum_one hy]
    constructor
    · intro h; exact absurd h.symm inj₁_ne_sumMaster
    · rintro (⟨⟨e1, e2⟩, ⟨e3, e4⟩⟩ | ⟨⟨e1, e2⟩, _⟩ | ⟨⟨e1, e2⟩, _⟩) <;> exfalso <;> omega
  .
    rw [sumEnum_master hx0 hx1, sumEnum_master hy0 hy1]
    exact ⟨fun _ => Or.inl ⟨⟨hx0, hx1⟩, ⟨hy0, hy1⟩⟩, fun _ => rfl⟩

include h₁ in

theorem eqSEdec :
    RecDecidable (fun u => sumEnum P₀ P₁ u.unpair.1 = sumEnum P₀ P₁ u.unpair.2) := by
  have hX0 : RecDecidable (fun u => u.unpair.1.unpair.1 = 0) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const 0)
  have hX1 : RecDecidable (fun u => u.unpair.1.unpair.1 = 1) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const 1)
  have hY0 : RecDecidable (fun u => u.unpair.2.unpair.1 = 0) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 0)
  have hY1 : RecDecidable (fun u => u.unpair.2.unpair.1 = 1) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 1)
  have hE0 : RecDecidable (fun u => P₀.X u.unpair.1.unpair.2 = P₀.X u.unpair.2.unpair
    .2) :=
    recDec_setEq₀ (Nat.Primrec.right.comp Nat.Primrec.left) (Nat.Primrec.right.comp Nat
    .Primrec.right)
  have hE1 : RecDecidable (fun u => P₁.X u.unpair.1.unpair.2 = P₁.X u.unpair.2.unpair
    .2) :=
```

```
    recDec_setEq₁ (Nat.Primrec.right.comp Nat.Primrec.left) (Nat.Primrec.right.comp Nat
    .Primrec.right)
  exact RecDecidable.of_iff (fun u => sumEnum_eq_iff (h₁ := h₁) u.unpair.1 u.unpair.2)
    (((hX0.not.and hX1.not).and (hY0.not.and hY1.not)).or
      (((hX0.and hY0).and hE0).or ((hX1.and hY1).and hE1)))

include h₀ h₁

def sumPresentation (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁) :
    ComputablePresentation (sum V₀ V₁ h₀ h₁) where
  X := sumEnum P₀ P₁
  mem_X t := sumEnum_mem t
  surj := by
    rintro W (rfl | ⟨X, hX, rfl⟩ | ⟨Y, hY, rfl⟩)
    · exact ⟨Nat.pair 2 0, sumEnum_master (by rw [unpair_pair_fst]; decide)
        (by rw [unpair_pair_fst]; decide)⟩
    · obtain ⟨n, rfl⟩ := P₀.surj hX
      exact ⟨Nat.pair 0 n, by rw [sumEnum_zero (by rw [unpair_pair_fst]),
    unpair_pair_snd]⟩
    · obtain ⟨n, rfl⟩ := P₁.surj hY
      exact ⟨Nat.pair 1 n, by rw [sumEnum_one (by rw [unpair_pair_fst]),
    unpair_pair_snd]⟩
  interEq_computable := by
    have hMK : RecDecidable (fun t => sumEnum P₀ P₁ t.unpair.2.unpair.1
        = sumEnum P₀ P₁ t.unpair.2.unpair.2) := by
      refine RecDecidable.of_iff (fun t => ?_) ((eqSEdec (P₀ := P₀) (P₁ := P₁) (h₁ := h₁
    )).comp
        ((Nat.Primrec.left.comp Nat.Primrec.right).pair (Nat.Primrec.right.comp Nat.
    Primrec.right)))
      simp only [unpair_pair_fst, unpair_pair_snd]
    have hNK : RecDecidable (fun t => sumEnum P₀ P₁ t.unpair.1
        = sumEnum P₀ P₁ t.unpair.2.unpair.2) := by
      refine RecDecidable.of_iff (fun t => ?_) ((eqSEdec (P₀ := P₀) (P₁ := P₁) (h₁ := h₁
    )).comp
        (Nat.Primrec.left.pair (Nat.Primrec.right.comp Nat.Primrec.right)))
      simp only [unpair_pair_fst, unpair_pair_snd]
    have hA0 : RecDecidable (fun t => t.unpair.1.unpair.1 = 0) :=
      RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const
    0)
    have hA1 : RecDecidable (fun t => t.unpair.1.unpair.1 = 1) :=
      RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const
    1)
    have hB0 : RecDecidable (fun t => t.unpair.2.unpair.1.unpair.1 = 0) :=
      RecDecidable.natEq (Nat.Primrec.left.comp (Nat.Primrec.left.comp Nat.Primrec.
    right))
        (Nat.Primrec.const 0)
    have hB1 : RecDecidable (fun t => t.unpair.2.unpair.1.unpair.1 = 1) :=
      RecDecidable.natEq (Nat.Primrec.left.comp (Nat.Primrec.left.comp Nat.Primrec.
    right))
        (Nat.Primrec.const 1)
    have hC0 : RecDecidable (fun t => t.unpair.2.unpair.2.unpair.1 = 0) :=
      RecDecidable.natEq (Nat.Primrec.left.comp (Nat.Primrec.right.comp Nat.Primrec.
    right))
        (Nat.Primrec.const 0)
    have hC1 : RecDecidable (fun t => t.unpair.2.unpair.2.unpair.1 = 1) :=
```

```
  RecDecidable.natEq (Nat.Primrec.left.comp (Nat.Primrec.right.comp Nat.Primrec.
right))
    (Nat.Primrec.const 1)
have hg : Nat.Primrec (fun t => Nat.pair t.unpair.1.unpair.2
    (Nat.pair t.unpair.2.unpair.1.unpair.2 t.unpair.2.unpair.2.unpair.2)) :=
  (Nat.Primrec.right.comp Nat.Primrec.left).pair
    ((Nat.Primrec.right.comp (Nat.Primrec.left.comp Nat.Primrec.right)).pair
      (Nat.Primrec.right.comp (Nat.Primrec.right.comp Nat.Primrec.right)))
have hIE0 : RecDecidable (fun t => P₀.X t.unpair.1.unpair.2 ∩ P₀.X t.unpair.2.
unpair.1.unpair.2
    = P₀.X t.unpair.2.unpair.2.unpair.2) := by
  refine RecDecidable.of_iff (fun t => ?_) (P₀.interEq_computable.comp hg)
  simp only [unpair_pair_fst, unpair_pair_snd]
have hIE1 : RecDecidable (fun t => P₁.X t.unpair.1.unpair.2 ∩ P₁.X t.unpair.2.
unpair.1.unpair.2
    = P₁.X t.unpair.2.unpair.2.unpair.2) := by
  refine RecDecidable.of_iff (fun t => ?_) (P₁.interEq_computable.comp hg)
  simp only [unpair_pair_fst, unpair_pair_snd]
refine RecDecidable.of_iff (fun t => ?_)
  (((hA0.not.and hA1.not).and hMK).or
    (((hB0.not.and hB1.not).and hNK).or
      ((((hA0.and hB0).and hC0).and hIE0).or
        (((hA1.and hB1).and hC1).and hIE1))))
dsimp only
rcases tag_trichotomy t.unpair.1.unpair.1 with hna | hna | ⟨hna0, hna1⟩
· rcases tag_trichotomy t.unpair.2.unpair.1.unpair.1 with hnb | hnb | ⟨hnb0, hnb1⟩
  ·
    rw [sumEnum_zero hna, sumEnum_zero hnb, inj₀_inter]
    rcases tag_trichotomy t.unpair.2.unpair.2.unpair.1 with hnc | hnc | ⟨hnc0, hnc1
⟩
    · rw [sumEnum_zero hnc, inj₀_eq_iff]
      constructor
      · intro h; exact Or.inr (Or.inr (Or.inl ⟨⟨⟨hna, hnb⟩, hnc⟩, h⟩))
      · rintro (⟨⟨e1, _⟩, _⟩ | ⟨⟨e1, _⟩, _⟩ | ⟨⟨⟨_, _⟩, _⟩, h⟩ | ⟨⟨⟨e1, _⟩, _⟩, _⟩)
        · exfalso; omega
        · exfalso; omega
        · exact h
        · exfalso; omega
    · rw [sumEnum_one hnc]
      constructor
      · intro h; exact absurd h (inj₀_ne_inj₁_of_nonempty (h₁ _ (P₁.mem_X _)))
      · rintro (⟨⟨e1, _⟩, _⟩ | ⟨⟨e1, _⟩, _⟩ | ⟨⟨⟨_, _⟩, e3⟩, _⟩ | ⟨⟨⟨e1, _⟩, _⟩, _⟩) <;>
exfalso <;> omega
    · rw [sumEnum_master hnc0 hnc1]
      constructor
      · intro h; exact absurd h inj₀_ne_sumMaster
      · rintro (⟨⟨e1, _⟩, _⟩ | ⟨⟨e1, _⟩, _⟩ | ⟨⟨⟨_, _⟩, e3⟩, _⟩ | ⟨⟨⟨e1, _⟩, _⟩, _⟩) <;>
exfalso <;> omega
  ·
    rw [sumEnum_zero hna, sumEnum_one hnb, inj₀_inter_inj₁]
    constructor
    · intro h
      obtain ⟨x, hx⟩ := sumEnum_nonempty (h₀ := h₀) (h₁ := h₁) t.unpair.2.unpair.2
      rw [← h] at hx
      exact absurd hx (Set.notMem_empty x)
```

```
    · rintro (⟨⟨e1, _⟩, _⟩ | ⟨⟨_, e2⟩, _⟩ | ⟨⟨⟨_, e2⟩, _⟩, _⟩ | ⟨⟨⟨e1, _⟩, _⟩, _⟩) <;>
exfalso <;> omega
  ·
    rw [sumEnum_master hnb0 hnb1, sumEnum_inter_sumMaster]
    constructor
    · intro h; exact Or.inr (Or.inl ⟨⟨hnb0, hnb1⟩, h⟩)
    · rintro (⟨⟨e1, _⟩, _⟩ | ⟨_, h⟩ | ⟨⟨_, e2⟩, _⟩, _⟩ | ⟨⟨e1, _⟩, _⟩, _⟩)
      · exfalso; omega
      · exact h
      · exfalso; omega
      · exfalso; omega
· rcases tag_trichotomy t.unpair.2.unpair.1.unpair.1 with hnb | hnb | ⟨hnb0, hnb1⟩
  ·
    rw [sumEnum_one hna, sumEnum_zero hnb, Set.inter_comm, inj₀_inter_inj₁]
    constructor
    · intro h
      obtain ⟨x, hx⟩ := sumEnum_nonempty (h₀ := h₀) (h₁ := h₁) t.unpair.2.unpair.2
      rw [← h] at hx
      exact absurd hx (Set.notMem_empty x)
    · rintro (⟨⟨_, e2⟩, _⟩ | ⟨⟨e1, _⟩, _⟩ | ⟨⟨⟨e1, _⟩, _⟩, _⟩ | ⟨⟨⟨_, e2⟩, _⟩, _⟩) <;>
exfalso <;> omega
  ·
    rw [sumEnum_one hna, sumEnum_one hnb, inj₁_inter]
    rcases tag_trichotomy t.unpair.2.unpair.2.unpair.1 with hnc | hnc | ⟨hnc0, hnc1
⟩
    · rw [sumEnum_zero hnc]
      constructor
      · intro h; exact (inj₀_eq_inj₁_elim (h₀ _ (P₀.mem_X _)) h.symm).elim
      · rintro (⟨⟨_, e2⟩, _⟩ | ⟨⟨_, e2⟩, _⟩ | ⟨⟨⟨e1, _⟩, _⟩, _⟩ | ⟨⟨⟨_, _⟩, e3⟩, _⟩) <;>
exfalso <;> omega


    · rw [sumEnum_one hnc, inj₁_eq_iff]
      constructor
      · intro h; exact Or.inr (Or.inr (Or.inr ⟨⟨⟨hna, hnb⟩, hnc⟩, h⟩))
      · rintro (⟨⟨_, e2⟩, _⟩ | ⟨⟨_, e2⟩, _⟩ | ⟨⟨⟨e1, _⟩, _⟩, _⟩ | ⟨⟨⟨_, _⟩, _⟩, h⟩)
        · exfalso; omega
        · exfalso; omega
        · exfalso; omega
        · exact h
    · rw [sumEnum_master hnc0 hnc1]
      constructor
      · intro h; exact absurd h inj₁_ne_sumMaster
      · rintro (⟨⟨_, e2⟩, _⟩ | ⟨⟨_, e2⟩, _⟩ | ⟨⟨⟨e1, _⟩, _⟩, _⟩ | ⟨⟨⟨_, _⟩, e3⟩, _⟩) <;>
exfalso <;> omega
  ·
    rw [sumEnum_master hnb0 hnb1, sumEnum_inter_sumMaster]
    constructor
    · intro h; exact Or.inr (Or.inl ⟨⟨hnb0, hnb1⟩, h⟩)
    · rintro (⟨⟨_, e2⟩, _⟩ | ⟨_, h⟩ | ⟨⟨_, e2⟩, _⟩, _⟩ | ⟨⟨_, e2⟩, _⟩, _⟩)
      · exfalso; omega
      · exact h
      · exfalso; omega
      · exfalso; omega
·
  rw [sumEnum_master hna0 hna1, sumMaster_inter_sumEnum]
  constructor
```

```
    · intro h; exact Or.inl ⟨⟨hna0, hna1⟩, h⟩
    · rintro (⟨_, h⟩ | ⟨⟨e1, e2⟩, h⟩ | ⟨⟨⟨e1, _⟩, _⟩, _⟩ | ⟨⟨⟨e1, _⟩, _⟩, _⟩)
      · exact h
      · rw [sumEnum_master e1 e2]; exact h
      · exfalso; omega
      · exfalso; omega
cons_computable := by
  have hA0 : RecDecidable (fun s => s.unpair.1.unpair.1 = 0) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const
  0)
  have hA1 : RecDecidable (fun s => s.unpair.1.unpair.1 = 1) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const
  1)
  have hB0 : RecDecidable (fun s => s.unpair.2.unpair.1 = 0) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const
  0)
  have hB1 : RecDecidable (fun s => s.unpair.2.unpair.1 = 1) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const
  1)
  have hgc : Nat.Primrec (fun s => Nat.pair s.unpair.1.unpair.2 s.unpair.2.unpair.2)
   :=
    (Nat.Primrec.right.comp Nat.Primrec.left).pair (Nat.Primrec.right.comp Nat.
  Primrec.right)
  have hC0 : RecDecidable (fun s => ∃ k, P₀.X k ⊆ P₀.X s.unpair.1.unpair.2 ∩ P₀.X s.
  unpair.2.unpair.2)
      := by
    refine RecDecidable.of_iff (fun s => ?_) (P₀.cons_computable.comp hgc)
    simp only [unpair_pair_fst, unpair_pair_snd]
  have hC1 : RecDecidable (fun s => ∃ k, P₁.X k ⊆ P₁.X s.unpair.1.unpair.2 ∩ P₁.X s.
  unpair.2.unpair.2)
      := by
    refine RecDecidable.of_iff (fun s => ?_) (P₁.cons_computable.comp hgc)
    simp only [unpair_pair_fst, unpair_pair_snd]
  refine RecDecidable.of_iff (fun s => ?_)
    ((hA0.not.and hA1.not).or
      ((hB0.not.and hB1.not).or
        (((hA0.and hB0).and hC0).or ((hA1.and hB1).and hC1))))
  dsimp only
  rcases tag_trichotomy s.unpair.1.unpair.1 with hna | hna | ⟨hna0, hna1⟩
  · rcases tag_trichotomy s.unpair.2.unpair.1 with hnb | hnb | ⟨hnb0, hnb1⟩
    ·
      rw [sumEnum_zero hna, sumEnum_zero hnb, inj₀_inter]
      constructor
      · rintro ⟨k, hk⟩
        obtain ⟨X₂, hX₂mem, hX₂eq⟩ := mem_subset_inj₀ (sumEnum_mem (h₀ := h₀) (h₁ := h₁
  ) k) hk
        obtain ⟨j, hj⟩ := P₀.surj hX₂mem
        refine Or.inr (Or.inr (Or.inl ⟨⟨hna, hnb⟩, j, ?_⟩))
        rw [hj]
        rw [hX₂eq] at hk
        exact inj₀_subset_inj₀.mp hk
      · rintro (⟨e1, _⟩ | ⟨e1, _⟩ | ⟨⟨_, _⟩, j, hj⟩ | ⟨⟨e1, _⟩, _⟩)
        · exfalso; omega
        · exfalso; omega
        · refine ⟨Nat.pair 0 j, ?_⟩
          rw [sumEnum_zero (by rw [unpair_pair_fst]), unpair_pair_snd]
```

```
          exact inj₀_subset_inj₀.mpr hj
        · exfalso; omega
    .
      rw [sumEnum_zero hna, sumEnum_one hnb, inj₀_inter_inj₁]
      constructor
      · rintro ⟨k, hk⟩
        obtain ⟨x, hx⟩ := sumEnum_nonempty (h₀ := h₀) (h₁ := h₁) k
        exact absurd (hk hx) (Set.notMem_empty x)
      · rintro ((⟨e1, _⟩ | ⟨_, e2⟩ | ⟨⟨_, e2⟩, _⟩ | ⟨⟨e1, _⟩, _⟩) <;> exfalso <;> omega
    .
      rw [sumEnum_master hnb0 hnb1, sumEnum_inter_sumMaster]
      exact ⟨fun _ => Or.inr (Or.inl ⟨hnb0, hnb1⟩), fun _ => ⟨s.unpair.1, subset_rfl⟩⟩
  · rcases tag_trichotomy s.unpair.2.unpair.1 with hnb | hnb | ⟨hnb0, hnb1⟩
    .
      rw [sumEnum_one hna, sumEnum_zero hnb, Set.inter_comm, inj₀_inter_inj₁]
      constructor
      · rintro ⟨k, hk⟩
        obtain ⟨x, hx⟩ := sumEnum_nonempty (h₀ := h₀) (h₁ := h₁) k
        exact absurd (hk hx) (Set.notMem_empty x)
      · rintro ((⟨_, e2⟩ | ⟨e1, _⟩ | ⟨⟨e1, _⟩, _⟩ | ⟨⟨_, e2⟩, _⟩) <;> exfalso <;> omega
    .
      rw [sumEnum_one hna, sumEnum_one hnb, inj₁_inter]
      constructor
      · rintro ⟨k, hk⟩
        obtain ⟨Y₂, hY₂mem, hY₂eq⟩ := mem_subset_inj₁ (sumEnum_mem (h₀ := h₀) (h₁ := h₁
  ) k) hk
        obtain ⟨j, hj⟩ := P₁.surj hY₂mem
        refine Or.inr (Or.inr (Or.inr ⟨⟨hna, hnb⟩, j, ?_⟩))
        rw [hj]
        rw [hY₂eq] at hk
        exact inj₁_subset_inj₁.mp hk
      · rintro ((⟨_, e2⟩ | ⟨_, e2⟩ | ⟨⟨e1, _⟩, _⟩ | ⟨⟨_, _⟩, j, hj⟩)
        · exfalso; omega
        · exfalso; omega
        · exfalso; omega
        · refine ⟨Nat.pair 1 j, ?_⟩
          rw [sumEnum_one (by rw [unpair_pair_fst]), unpair_pair_snd]
          exact inj₁_subset_inj₁.mpr hj
    .
      rw [sumEnum_master hnb0 hnb1, sumEnum_inter_sumMaster]
      exact ⟨fun _ => Or.inr (Or.inl ⟨hnb0, hnb1⟩), fun _ => ⟨s.unpair.1, subset_rfl⟩⟩
  .
    rw [sumEnum_master hna0 hna1, sumMaster_inter_sumEnum]
    exact ⟨fun _ => Or.inl ⟨hna0, hna1⟩, fun _ => ⟨s.unpair.2, subset_rfl⟩⟩
inter n m :=
  selectFn (1 - (2 - n.unpair.1)) m
    (selectFn (1 - (2 - m.unpair.1)) n
      (selectFn (1 - n.unpair.1)
        (Nat.pair 0 (P₀.inter n.unpair.2 m.unpair.2))
        (Nat.pair 1 (P₁.inter n.unpair.2 m.unpair.2))))
inter_primrec := by
  have hnTag : Nat.Primrec (fun t => t.unpair.1.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.left
  have hmTag : Nat.Primrec (fun t => t.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hnIdx : Nat.Primrec (fun t => t.unpair.1.unpair.2) :=
```

```
    Nat.Primrec.right.comp Nat.Primrec.left
  have hmIdx : Nat.Primrec (fun t => t.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hP0 : Nat.Primrec (fun t => Nat.pair 0 (P₀.inter t.unpair.1.unpair.2 t.unpair
  .2.unpair.2)) :=
    (Nat.Primrec.const 0).pair ((P₀.inter_primrec.comp (hnIdx.pair hmIdx)).of_eq fun
  t => by
      simp only [unpair_pair_fst, unpair_pair_snd])
  have hP1 : Nat.Primrec (fun t => Nat.pair 1 (P₁.inter t.unpair.1.unpair.2 t.unpair
  .2.unpair.2)) :=
    (Nat.Primrec.const 1).pair ((P₁.inter_primrec.comp (hnIdx.pair hmIdx)).of_eq fun
  t => by
      simp only [unpair_pair_fst, unpair_pair_snd])
  have hcnMaster : Nat.Primrec (fun t => 1 - (2 - t.unpair.1.unpair.1)) :=
    primrec_sub₂ (Nat.Primrec.const 1) (primrec_sub₂ (Nat.Primrec.const 2) hnTag)
  have hcmMaster : Nat.Primrec (fun t => 1 - (2 - t.unpair.2.unpair.1)) :=
    primrec_sub₂ (Nat.Primrec.const 1) (primrec_sub₂ (Nat.Primrec.const 2) hmTag)
  have hcnZero : Nat.Primrec (fun t => 1 - t.unpair.1.unpair.1) :=
    primrec_sub₂ (Nat.Primrec.const 1) hnTag
  exact primrec_selectFn hcnMaster Nat.Primrec.right
    (primrec_selectFn hcmMaster Nat.Primrec.left
      (primrec_selectFn hcnZero hP0 hP1))
inter_spec := by
  rintro n m ⟨k, hk⟩
  rcases tag_trichotomy n.unpair.1 with hna | hna | ⟨hna0, hna1⟩
  .
    rw [show 1 - (2 - n.unpair.1) = 0 by omega, selectFn_zero]
    rcases tag_trichotomy m.unpair.1 with hmb | hmb | ⟨hmb0, hmb1⟩
    .
      rw [show 1 - (2 - m.unpair.1) = 0 by omega, selectFn_zero,
        show 1 - n.unpair.1 = 1 by omega, selectFn_one,
        sumEnum_zero (by rw [unpair_pair_fst]), unpair_pair_snd,
        sumEnum_zero hna, sumEnum_zero hmb, inj₀_inter]
      rw [sumEnum_zero hna, sumEnum_zero hmb, inj₀_inter] at hk
      obtain ⟨X₂, hX₂mem, hX₂eq⟩ := mem_subset_inj₀ (sumEnum_mem (h₀ := h₀) (h₁ := h₁)
  k) hk
      obtain ⟨j, hj⟩ := P₀.surj hX₂mem
      rw [hX₂eq] at hk
      have hjsub : P₀.X j ⊆ P₀.X n.unpair.2 ∩ P₀.X m.unpair.2 := by
        rw [hj]; exact inj₀_subset_inj₀.mp hk
      rw [P₀.inter_spec ⟨j, hjsub⟩]
    .
      exfalso
      rw [sumEnum_zero hna, sumEnum_one hmb, inj₀_inter_inj₁] at hk
      obtain ⟨x, hx⟩ := sumEnum_nonempty (h₀ := h₀) (h₁ := h₁) k
      exact absurd (hk hx) (Set.notMem_empty x)
    .
      rw [show 1 - (2 - m.unpair.1) = 1 by omega, selectFn_one,
        sumEnum_master hmb0 hmb1, sumEnum_inter_sumMaster]
  .
    rw [show 1 - (2 - n.unpair.1) = 0 by omega, selectFn_zero]
    rcases tag_trichotomy m.unpair.1 with hmb | hmb | ⟨hmb0, hmb1⟩
    .
      exfalso
      rw [sumEnum_one hna, sumEnum_zero hmb, Set.inter_comm, inj₀_inter_inj₁] at hk
      obtain ⟨x, hx⟩ := sumEnum_nonempty (h₀ := h₀) (h₁ := h₁) k
```

```
        exact absurd (hk hx) (Set.notMem_empty x)
      .
        rw [show 1 - (2 - m.unpair.1) = 0 by omega, selectFn_zero,
          show 1 - n.unpair.1 = 0 by omega, selectFn_zero,
          sumEnum_one (by rw [unpair_pair_fst]), unpair_pair_snd,
          sumEnum_one hna, sumEnum_one hmb, inj₁_inter]
        rw [sumEnum_one hna, sumEnum_one hmb, inj₁_inter] at hk
        obtain ⟨Y₂, hY₂mem, hY₂eq⟩ := mem_subset_inj₁ (sumEnum_mem (h₀ := h₀) (h₁ := h₁)
    k) hk
        obtain ⟨j, hj⟩ := P₁.surj hY₂mem
        rw [hY₂eq] at hk
        have hjsub : P₁.X j ⊆ P₁.X n.unpair.2 ∩ P₁.X m.unpair.2 := by
          rw [hj]; exact inj₁_subset_inj₁.mp hk
        rw [P₁.inter_spec ⟨j, hjsub⟩]
      .
        rw [show 1 - (2 - m.unpair.1) = 1 by omega, selectFn_one,
          sumEnum_master hmb0 hmb1, sumEnum_inter_sumMaster]
    .
      rw [show 1 - (2 - n.unpair.1) = 1 by omega, selectFn_one,
        sumEnum_master hna0 hna1, sumMaster_inter_sumEnum]
  masterIdx := Nat.pair 2 0
  masterIdx_spec := by
    rw [sumEnum_master (by rw [unpair_pair_fst]; decide) (by rw [unpair_pair_fst];
    decide)]
    rfl

theorem sum_isEffectivelyGiven (g₀ : V₀.IsEffectivelyGiven) (g₁ : V₁.IsEffectivelyGiven
    ) :
    (sum V₀ V₁ h₀ h₁).IsEffectivelyGiven := by
  obtain ⟨P₀⟩ := g₀; obtain ⟨P₁⟩ := g₁
  exact ⟨sumPresentation P₀ P₁⟩

@[simp] theorem sumPresentation_X (P₀ : ComputablePresentation V₀) (P₁ :
    ComputablePresentation V₁)
    (t : ℕ) : (sumPresentation P₀ P₁ (h₀ := h₀) (h₁ := h₁)).X t = sumEnum P₀ P₁ t := rfl

theorem inMap₀_isComputable (P₀ : ComputablePresentation V₀) (P₁ :
    ComputablePresentation V₁) :
    ComputableMap P₀ (sumPresentation P₀ P₁) (inMap₀ (h₀ := h₀) (h₁ := h₁)) := by
  constructor
  have hincl : RecDecidable (fun s => P₀.X s.unpair.1 ⊆ P₀.X s.unpair.2) := P₀.
    incl_computable
  have hmtag0 : RecDecidable (fun s => s.unpair.2.unpair.1 = 0) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 0)
  have hmtag1 : RecDecidable (fun s => s.unpair.2.unpair.1 = 1) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 1)
  have hincl0 : RecDecidable (fun s => P₀.X s.unpair.1 ⊆ P₀.X s.unpair.2.unpair.2) :=
    RecDecidable.of_iff (fun s => by simp only [unpair_pair_fst, unpair_pair_snd])
      (hincl.comp (Nat.Primrec.left.pair (Nat.Primrec.right.comp Nat.Primrec.right)))
  refine (RecDecidable.of_iff (fun s => ?_)
    ((hmtag0.and hincl0).or (hmtag0.not.and hmtag1.not))).re
  simp only [sumPresentation_X]
  rcases tag_trichotomy s.unpair.2.unpair.1 with hm | hm | ⟨hm0, hm1⟩
  · constructor
    · rintro ⟨_, _, hsub⟩
      rw [sumEnum_zero hm] at hsub
```

```
      exact Or.inl ⟨hm, inj₀_subset_inj₀.mp hsub⟩
    · rintro (⟨_, hsub⟩ | ⟨e1, _⟩)
      · refine ⟨P₀.mem_X _, sumEnum_mem _, ?_⟩
        rw [sumEnum_zero hm]; exact inj₀_subset_inj₀.mpr hsub
      · exfalso; omega
  · constructor
    · rintro ⟨_, _, hsub⟩
      rw [sumEnum_one hm] at hsub
      exact (not_inj₀_subset_inj₁ (h₀ _ (P₀.mem_X _)) hsub).elim
    · rintro (⟨e1, _⟩ | ⟨_, e2⟩) <;> exfalso <;> omega
  · constructor
    · intro _; exact Or.inr ⟨hm0, hm1⟩
    · intro _
      refine ⟨P₀.mem_X _, sumEnum_mem _, ?_⟩
      rw [sumEnum_master hm0 hm1]; exact inj₀_subset_sumMaster (P₀.mem_X _)

theorem inMap₁_isComputable (P₀ : ComputablePresentation V₀) (P₁ :
    ComputablePresentation V₁) :
    ComputableMap P₁ (sumPresentation P₀ P₁) (inMap₁ (h₀ := h₀) (h₁ := h₁)) := by
  constructor
  have hincl : RecDecidable (fun s => P₁.X s.unpair.1 ⊆ P₁.X s.unpair.2) := P₁.
    incl_computable
  have hmtag0 : RecDecidable (fun s => s.unpair.2.unpair.1 = 0) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 0)
  have hmtag1 : RecDecidable (fun s => s.unpair.2.unpair.1 = 1) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 1)
  have hincl1 : RecDecidable (fun s => P₁.X s.unpair.1 ⊆ P₁.X s.unpair.2.unpair.2) :=
    RecDecidable.of_iff (fun s => by simp only [unpair_pair_fst, unpair_pair_snd])
      (hincl.comp (Nat.Primrec.left.pair (Nat.Primrec.right.comp Nat.Primrec.right)))
  refine (RecDecidable.of_iff (fun s => ?_)
    ((hmtag1.and hincl1).or (hmtag0.not.and hmtag1.not))).re
  simp only [sumPresentation_X]
  rcases tag_trichotomy s.unpair.2.unpair.1 with hm | hm | ⟨hm0, hm1⟩
  · constructor
    · rintro ⟨_, _, hsub⟩
      rw [sumEnum_zero hm] at hsub
      exact (not_inj₁_subset_inj₀ (h₁ _ (P₁.mem_X _)) hsub).elim
    · rintro (⟨e1, _⟩ | ⟨_, e2⟩) <;> exfalso <;> omega
  · constructor
    · rintro ⟨_, _, hsub⟩
      rw [sumEnum_one hm] at hsub
      exact Or.inl ⟨hm, inj₁_subset_inj₁.mp hsub⟩
    · rintro (⟨_, hsub⟩ | ⟨e1, _⟩)
      · refine ⟨P₁.mem_X _, sumEnum_mem _, ?_⟩
        rw [sumEnum_one hm]; exact inj₁_subset_inj₁.mpr hsub
      · exfalso; omega
  · constructor
    · intro _; exact Or.inr ⟨hm0, hm1⟩
    · intro _
      refine ⟨P₁.mem_X _, sumEnum_mem _, ?_⟩
      rw [sumEnum_master hm0 hm1]; exact inj₁_subset_sumMaster (P₁.mem_X _)

theorem outMap₀_isComputable (P₀ : ComputablePresentation V₀) (P₁ :
    ComputablePresentation V₁) :
    ComputableMap (sumPresentation P₀ P₁) P₀ (outMap₀ (h₀ := h₀) (h₁ := h₁)) := by
  constructor
```

```
  obtain ⟨k0, hk0⟩ := P₀.surj V₀.master_mem
  have hincl : RecDecidable (fun s => P₀.X s.unpair.1 ⊆ P₀.X s.unpair.2) := P₀.
    incl_computable
  have hntag0 : RecDecidable (fun s => s.unpair.1.unpair.1 = 0) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const 0)
  have hincl_left : RecDecidable (fun s => P₀.X s.unpair.1.unpair.2 ⊆ P₀.X s.unpair.2)
    :=
    RecDecidable.of_iff (fun s => by simp only [unpair_pair_fst, unpair_pair_snd])
      (hincl.comp ((Nat.Primrec.right.comp Nat.Primrec.left).pair Nat.Primrec.right))
  have hincl_master : RecDecidable (fun s => P₀.X k0 ⊆ P₀.X s.unpair.2) :=
    RecDecidable.of_iff (fun s => by simp only [unpair_pair_fst, unpair_pair_snd])
      (hincl.comp ((Nat.Primrec.const k0).pair Nat.Primrec.right))
  refine (RecDecidable.of_iff (fun s => ?_)
    ((hntag0.and hincl_left).or (hntag0.not.and hincl_master))).re
  simp only [sumPresentation_X]
  rcases tag_trichotomy s.unpair.1.unpair.1 with hn | hn | ⟨hn0, hn1⟩
  · constructor
    · rintro ⟨_, _, hsub⟩
      rw [sumEnum_zero hn, leftPart_inj₀] at hsub
      exact Or.inl ⟨hn, hsub⟩
    · rintro (⟨_, hsub⟩ | ⟨e1, _⟩)
      · refine ⟨sumEnum_mem _, P₀.mem_X _, ?_⟩
        rw [sumEnum_zero hn, leftPart_inj₀]; exact hsub
      · exfalso; omega
  · constructor
    · rintro ⟨_, _, hsub⟩
      rw [sumEnum_one hn, leftPart_inj₁ V₀ (h₁ _ (P₁.mem_X _))] at hsub
      refine Or.inr ⟨by omega, ?_⟩
      rw [hk0]; exact hsub
    · rintro (⟨e1, _⟩ | ⟨_, hsub⟩)
      · exfalso; omega
      · refine ⟨sumEnum_mem _, P₀.mem_X _, ?_⟩
        rw [sumEnum_one hn, leftPart_inj₁ V₀ (h₁ _ (P₁.mem_X _)), ← hk0]; exact hsub
  · constructor
    · rintro ⟨_, _, hsub⟩
      rw [sumEnum_master hn0 hn1, leftPart_sumMaster] at hsub
      refine Or.inr ⟨hn0, ?_⟩
      rw [hk0]; exact hsub
    · rintro (⟨e1, _⟩ | ⟨_, hsub⟩)
      · exfalso; omega
      · refine ⟨sumEnum_mem _, P₀.mem_X _, ?_⟩
        rw [sumEnum_master hn0 hn1, leftPart_sumMaster, ← hk0]; exact hsub

theorem outMap₁_isComputable (P₀ : ComputablePresentation V₀) (P₁ :
    ComputablePresentation V₁) :
    ComputableMap (sumPresentation P₀ P₁) P₁ (outMap₁ (h₀ := h₀) (h₁ := h₁)) := by
  constructor
  obtain ⟨k1, hk1⟩ := P₁.surj V₁.master_mem
  have hincl : RecDecidable (fun s => P₁.X s.unpair.1 ⊆ P₁.X s.unpair.2) := P₁.
    incl_computable
  have hntag1 : RecDecidable (fun s => s.unpair.1.unpair.1 = 1) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const 1)
  have hincl_right : RecDecidable (fun s => P₁.X s.unpair.1.unpair.2 ⊆ P₁.X s.unpair.2)
    :=
    RecDecidable.of_iff (fun s => by simp only [unpair_pair_fst, unpair_pair_snd])
      (hincl.comp ((Nat.Primrec.right.comp Nat.Primrec.left).pair Nat.Primrec.right))
```

```
  have hincl_master : RecDecidable (fun s => P₁.X k1 ⊆ P₁.X s.unpair.2) :=
    RecDecidable.of_iff (fun s => by simp only [unpair_pair_fst, unpair_pair_snd])
      (hincl.comp ((Nat.Primrec.const k1).pair Nat.Primrec.right))
  refine (RecDecidable.of_iff (fun s => ?_)
    ((hntag1.and hincl_right).or (hntag1.not.and hincl_master))).re
  simp only [sumPresentation_X]
  rcases tag_trichotomy s.unpair.1.unpair.1 with hn | hn | ⟨hn0, hn1⟩
  · constructor
    · rintro ⟨_, _, hsub⟩
      rw [sumEnum_zero hn, rightPart_inj₀ V₁ (h₀ _ (P₀.mem_X _))] at hsub
      refine Or.inr ⟨by omega, ?_⟩
      rw [hk1]; exact hsub
    · rintro (⟨e1, _⟩ | ⟨_, hsub⟩)
      · exfalso; omega
      · refine ⟨sumEnum_mem _, P₁.mem_X _, ?_⟩
        rw [sumEnum_zero hn, rightPart_inj₀ V₁ (h₀ _ (P₀.mem_X _)), ← hk1]; exact hsub
  · constructor
    · rintro ⟨_, _, hsub⟩
      rw [sumEnum_one hn, rightPart_inj₁] at hsub
      exact Or.inl ⟨hn, hsub⟩
    · rintro (⟨_, hsub⟩ | ⟨e1, _⟩)
      · refine ⟨sumEnum_mem _, P₁.mem_X _, ?_⟩
        rw [sumEnum_one hn, rightPart_inj₁]; exact hsub
      · exfalso; omega
  · constructor
    · rintro ⟨_, _, hsub⟩
      rw [sumEnum_master hn0 hn1, rightPart_sumMaster] at hsub
      refine Or.inr ⟨hn1, ?_⟩
      rw [hk1]; exact hsub
    · rintro (⟨e1, _⟩ | ⟨_, hsub⟩)
      · exfalso; omega
      · refine ⟨sumEnum_mem _, P₁.mem_X _, ?_⟩
        rw [sumEnum_master hn0 hn1, rightPart_sumMaster, ← hk1]; exact hsub

theorem sumMap_isComputable {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'}
    {h₀' : ∀ X, V₀'.mem X → X.Nonempty} {h₁' : ∀ Y, V₁'.mem Y → Y.Nonempty}
    (Q₀ : ComputablePresentation V₀') (Q₁ : ComputablePresentation V₁')
    {f : ApproximableMap V₀ V₀'} {g : ApproximableMap V₁ V₁'}
    (hf : ComputableMap P₀ Q₀ f) (hg : ComputableMap P₁ Q₁ g) :
    ComputableMap (sumPresentation P₀ P₁ (h₀ := h₀) (h₁ := h₁))
      (sumPresentation Q₀ Q₁ (h₀ := h₀') (h₁ := h₁'))
      (sumMap (h₀ := h₀) (h₁ := h₁) (h₀' := h₀') (h₁' := h₁') f g) := by
  constructor
  have hf' : REPred (fun u => f.rel (P₀.X u.unpair.1) (Q₀.X u.unpair.2)) := hf.out
  have hg' : REPred (fun u => g.rel (P₁.X u.unpair.1) (Q₁.X u.unpair.2)) := hg.out
  have hNtag0 : RecDecidable (fun s => s.unpair.1.unpair.1 = 0) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const 0)
  have hNtag1 : RecDecidable (fun s => s.unpair.1.unpair.1 = 1) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const 1)
  have hMtag0 : RecDecidable (fun s => s.unpair.2.unpair.1 = 0) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 0)
  have hMtag1 : RecDecidable (fun s => s.unpair.2.unpair.1 = 1) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 1)
  have hfr : REPred (fun s => f.rel (P₀.X s.unpair.1.unpair.2) (Q₀.X s.unpair.2.unpair
    .2)) :=
    REPred.of_iff (fun s => by simp only [unpair_pair_fst, unpair_pair_snd])
```

```
    (hf'.comp ((Nat.Primrec.right.comp Nat.Primrec.left).pair
      (Nat.Primrec.right.comp Nat.Primrec.right)))
have hgr : REPred (fun s => g.rel (P₁.X s.unpair.1.unpair.2) (Q₁.X s.unpair.2.unpair
  .2)) :=
  REPred.of_iff (fun s => by simp only [unpair_pair_fst, unpair_pair_snd])
    (hg'.comp ((Nat.Primrec.right.comp Nat.Primrec.left).pair
      (Nat.Primrec.right.comp Nat.Primrec.right)))
have hA : REPred (fun s => s.unpair.2.unpair.1 = 0 ∧ s.unpair.2.unpair.1 = 1) :=
  (hMtag0.not.and hMtag1.not).re
have hB : REPred (fun s => (s.unpair.1.unpair.1 = 0 ∧ s.unpair.2.unpair.1 = 0)
    ∧ f.rel (P₀.X s.unpair.1.unpair.2) (Q₀.X s.unpair.2.unpair.2)) :=
  ((hNtag0.and hMtag0).re).and hfr
have hC : REPred (fun s => (s.unpair.1.unpair.1 = 1 ∧ s.unpair.2.unpair.1 = 1)
    ∧ g.rel (P₁.X s.unpair.1.unpair.2) (Q₁.X s.unpair.2.unpair.2)) :=
  ((hNtag1.and hMtag1).re).and hgr

refine REPred.of_iff (fun s => ?_) (hA.or (hB.or hC))
simp only [sumPresentation_X]
constructor
· rintro ⟨_, _, hdisj⟩
  rcases hdisj with hM | ⟨X, Y', hWX, hWY, hfXY⟩ | ⟨Y, Y', hWY, hWY', hgYY⟩
  · left
    rcases tag_trichotomy s.unpair.2.unpair.1 with hm | hm | hm
    · rw [sumEnum_zero hm] at hM; exact absurd hM inj₀_ne_sumMaster
    · rw [sumEnum_one hm] at hM; exact absurd hM inj₁_ne_sumMaster
    · exact hm
  · right; left
    have ha : s.unpair.1.unpair.1 = 0 ∧ X = P₀.X s.unpair.1.unpair.2 := by
      rcases tag_trichotomy s.unpair.1.unpair.1 with hn | hn | ⟨h0, h1⟩
      · rw [sumEnum_zero hn] at hWX; exact ⟨hn, (inj₀_eq_iff.mp hWX).symm⟩
      · rw [sumEnum_one hn] at hWX
        exact absurd hWX.symm (inj₀_ne_inj₁_of_nonempty (h₁ _ (P₁.mem_X _)))
      · rw [sumEnum_master h0 h1] at hWX; exact absurd hWX.symm inj₀_ne_sumMaster
    have hb : s.unpair.2.unpair.1 = 0 ∧ Y' = Q₀.X s.unpair.2.unpair.2 := by
      rcases tag_trichotomy s.unpair.2.unpair.1 with hm | hm | ⟨h0, h1⟩
      · rw [sumEnum_zero hm] at hWY; exact ⟨hm, (inj₀_eq_iff.mp hWY).symm⟩
      · rw [sumEnum_one hm] at hWY
        exact absurd hWY.symm (inj₀_ne_inj₁_of_nonempty (h₁' _ (Q₁.mem_X _)))
      · rw [sumEnum_master h0 h1] at hWY; exact absurd hWY.symm inj₀_ne_sumMaster
    obtain ⟨ha0, hX⟩ := ha; obtain ⟨hb0, hY⟩ := hb
    subst hX; subst hY
    exact ⟨⟨ha0, hb0⟩, hfXY⟩
  · right; right
    have ha : s.unpair.1.unpair.1 = 1 ∧ Y = P₁.X s.unpair.1.unpair.2 := by
      rcases tag_trichotomy s.unpair.1.unpair.1 with hn | hn | ⟨h0, h1⟩
      · rw [sumEnum_zero hn] at hWY
        exact (inj₀_eq_inj₁_elim (h₀ _ (P₀.mem_X _)) hWY).elim
      · rw [sumEnum_one hn] at hWY; exact ⟨hn, (inj₁_eq_iff.mp hWY).symm⟩
      · rw [sumEnum_master h0 h1] at hWY; exact absurd hWY.symm inj₁_ne_sumMaster
    have hb : s.unpair.2.unpair.1 = 1 ∧ Y' = Q₁.X s.unpair.2.unpair.2 := by
      rcases tag_trichotomy s.unpair.2.unpair.1 with hm | hm | ⟨h0, h1⟩
      · rw [sumEnum_zero hm] at hWY'
        exact (inj₀_eq_inj₁_elim (h₀' _ (Q₀.mem_X _)) hWY').elim
      · rw [sumEnum_one hm] at hWY'; exact ⟨hm, (inj₁_eq_iff.mp hWY').symm⟩
      · rw [sumEnum_master h0 h1] at hWY'; exact absurd hWY'.symm inj₁_ne_sumMaster
    obtain ⟨ha1, hYeq⟩ := ha; obtain ⟨hb1, hY'eq⟩ := hb
```

```
      subst hYeq; subst hY'eq
      exact ⟨⟨ha1, hb1⟩, hgYY⟩
  · rintro (⟨hm0, hm1⟩ | ⟨⟨hn0, hm0⟩, hfXY⟩ | ⟨⟨hn1, hm1⟩, hgYY⟩)
    · exact ⟨sumEnum_mem _, sumEnum_mem _, Or.inl (sumEnum_master hm0 hm1)⟩
    · exact ⟨sumEnum_mem _, sumEnum_mem _,
        Or.inr (Or.inl ⟨_, _, sumEnum_zero hn0, sumEnum_zero hm0, hfXY⟩)⟩
    · exact ⟨sumEnum_mem _, sumEnum_mem _,
        Or.inr (Or.inr ⟨_, _, sumEnum_one hn1, sumEnum_one hm1, hgYY⟩)⟩

end Sum

theorem paired_isComputable {V₂ : NeighborhoodSystem ?}
    {P₂ : ComputablePresentation V₂} {P₀ : ComputablePresentation V₀}
    {P₁ : ComputablePresentation V₁} {a : ApproximableMap V₂ V₀} {b : ApproximableMap V₂
     V₁}
    (ha : ComputableMap P₂ P₀ a) (hb : ComputableMap P₂ P₁ b) :
    ComputableMap P₂ (prodPresentation P₀ P₁) (paired a b) := by
  constructor
  have ha' : REPred (fun s => a.rel (P₂.X s.unpair.1) (P₀.X s.unpair.2)) := ha.out
  have hb' : REPred (fun s => b.rel (P₂.X s.unpair.1) (P₁.X s.unpair.2)) := hb.out
  have hra : Nat.Primrec (fun t => Nat.pair t.unpair.1 t.unpair.2.unpair.1) :=
    Nat.Primrec.left.pair (Nat.Primrec.left.comp Nat.Primrec.right)
  have hrb : Nat.Primrec (fun t => Nat.pair t.unpair.1 t.unpair.2.unpair.2) :=
    Nat.Primrec.left.pair (Nat.Primrec.right.comp Nat.Primrec.right)
  refine REPred.of_iff (fun t => ?_) ((ha'.comp hra).and (hb'.comp hrb))
  simp only [prodPresentation_X, paired_rel, inl_preimage_prodNbhd,
    inr_preimage_prodNbhd,
    unpair_pair_fst, unpair_pair_snd]
  exact ⟨fun h => ⟨h.2.1, h.2.2⟩,
    fun h => ⟨prod_mem_prodNbhd (P₀.mem_X _) (P₁.mem_X _), h.1, h.2⟩⟩

theorem prod_isEffectivelyGiven (h₀ : V₀.IsEffectivelyGiven) (h₁ : V₁.
    IsEffectivelyGiven) :
    (prod V₀ V₁).IsEffectivelyGiven := by
  obtain ⟨P₀⟩ := h₀; obtain ⟨P₁⟩ := h₁
  exact ⟨prodPresentation P₀ P₁⟩

theorem proj₀_isComputable (P₀ : ComputablePresentation V₀) (P₁ :
    ComputablePresentation V₁) :
    ComputableMap (prodPresentation P₀ P₁) P₀ (proj₀ V₀ V₁) := by
  constructor
  have hincl : RecDecidable (fun s => P₀.X s.unpair.1 ⊆ P₀.X s.unpair.2) := P₀.
    incl_computable
  have hr : Nat.Primrec (fun t => Nat.pair t.unpair.1.unpair.1 t.unpair.2) :=
    (Nat.Primrec.left.comp Nat.Primrec.left).pair Nat.Primrec.right
  refine (RecDecidable.of_iff (fun t => ?_) (hincl.comp hr)).re
  simp only [prodPresentation_X, proj₀_rel, inl_preimage_prodNbhd, unpair_pair_fst,
    unpair_pair_snd]
  exact ⟨fun h => h.2.2,
    fun h => ⟨prod_mem_prodNbhd (P₀.mem_X _) (P₁.mem_X _), P₀.mem_X _, h⟩⟩

theorem proj₁_isComputable (P₀ : ComputablePresentation V₀) (P₁ :
    ComputablePresentation V₁) :
    ComputableMap (prodPresentation P₀ P₁) P₁ (proj₁ V₀ V₁) := by
  constructor
  have hincl : RecDecidable (fun s => P₁.X s.unpair.1 ⊆ P₁.X s.unpair.2) := P₁.
```

```
    incl_computable
  have hr : Nat.Primrec (fun t => Nat.pair t.unpair.1.unpair.2 t.unpair.2) :=
    (Nat.Primrec.right.comp Nat.Primrec.left).pair Nat.Primrec.right
  refine (RecDecidable.of_iff (fun t => ?_) (hincl.comp hr)).re
  simp only [prodPresentation_X, proj₁_rel, inr_preimage_prodNbhd, unpair_pair_fst,
    unpair_pair_snd]
  exact ⟨fun h => h.2.2,
    fun h => ⟨prod_mem_prodNbhd (P₀.mem_X _) (P₁.mem_X _), P₁.mem_X _, h⟩⟩

theorem prodMap_isComputable {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β
    '}
    {P₀ : ComputablePresentation V₀} {P₁ : ComputablePresentation V₁}
    {P₀' : ComputablePresentation V₀'} {P₁' : ComputablePresentation V₁'}
    {f : ApproximableMap V₀ V₀'} {g : ApproximableMap V₁ V₁'}
    (hf : ComputableMap P₀ P₀' f) (hg : ComputableMap P₁ P₁' g) :
    ComputableMap (prodPresentation P₀ P₁) (prodPresentation P₀' P₁') (prodMap f g) :=
    by
  rw [prodMap]
  exact paired_isComputable (comp_isComputable (proj₀_isComputable P₀ P₁) hf)
    (comp_isComputable (proj₁_isComputable P₀ P₁) hg)

end

section
set_option linter.unusedVariables false

theorem theorem_74.{u_1, u_2, u_4, u_5, u_3} : And
  (And
    (And
      (And
        (And
          (And
            (And
              (And
                (And
                  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
    NeighbourhoodSystems.NeighborhoodSystem α}
                    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                    {h₀ :
                      ∀ (X : Set α),
                        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
    V₀ X → @Set.Nonempty α X}
                    {h₁ :
                      ∀ (Y : Set β),
                        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
    V₁ Y → @Set.Nonempty β Y},
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    IsEffectivelyGiven α V₀ →
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    IsEffectivelyGiven β V₁ →
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    IsEffectivelyGiven (Option (Sum α β))
                        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
                  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
    NeighbourhoodSystems.NeighborhoodSystem α}
```

```
                    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                    {h₀ :
                      ∀ (X : Set α),
                        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                    {h₁ :
                      ∀ (Y : Set β),
                        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y}
                    (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V₀)
                    (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β
 V₁),
                    @DomainTheory.NeighbourhoodSystems.ComputableMap α (Option (Sum
α β)) V₀
                      (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₀
                      (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h
₀ h₁ P₀ P₁)
                      (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁)))
                (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                  {h₀ :
                    ∀ (X : Set α),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
X → @Set.Nonempty α X}
                  {h₁ :
                    ∀ (Y : Set β),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
Y → @Set.Nonempty β Y}
                  (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V
₀)
                  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V
₁),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap β (Option (Sum α
β)) V₁
                    (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₁
                    (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀
h₁ P₀ P₁)
                    (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁)))
              (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                {h₀ :
                  ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V₀ X → @Set.Nonempty α X}
                {h₁ :
                  ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem β V₁ Y → @Set.Nonempty β Y}
                (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
                (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
,
                @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
α
                  (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₀
                  (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁
```

```
 P₀ P₁) P₀
                (@DomainTheory.NeighbourhoodSystems.outMap₀ α β V₀ V₁ h₀ h₁)))
          (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
            {V₁ : DomainTheory.NeighbourhoodSystem.NeighborhoodSystem β}
            {h₀ :
              ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.mem α V₀ X → @Set.Nonempty α X}
            {h₁ :
              ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.mem β V₁ Y → @Set.Nonempty β Y}
            (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
            (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁),
            @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β)) β
              (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₁
              (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁ P₀
 P₁) P₁
              (@DomainTheory.NeighbourhoodSystems.outMap₁ α β V₀ V₁ h₀ h₁)))
        (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
          {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
          {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
          {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V₀ X → @Set.Nonempty α X}
          {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem β V₁ Y → @Set.Nonempty β Y}
          {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
          {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
          {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
          {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
          {h₀' :
            ∀ (X : Set α'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
mem α' V₀' X → @Set.Nonempty α' X}
          {h₁' :
            ∀ (Y : Set β'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
mem β' V₁' Y → @Set.Nonempty β' Y}
          (Q₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α' V₀')
          (Q₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β' V₁')
          {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀'}
          {g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'},
          @DomainTheory.NeighbourhoodSystems.ComputableMap α α' V₀ V₀' P₀ Q₀ f →
            @DomainTheory.NeighbourhoodSystems.ComputableMap β β' V₁ V₁' P₁ Q₁ g →
              @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
(Option (Sum α' β'))
                (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
                (@DomainTheory.NeighbourhoodSystems.sum α' β' V₀' V₁' h₀' h₁')
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁
 P₀ P₁)
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α' β' V₀' V₁' h
₀' h₁' Q₀ Q₁)
                (@DomainTheory.NeighbourhoodSystems.sumMap α β α' β' V₀ V₁ V₀' V₁'
h₀ h₁ h₀' h₁' f g)))
      (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
        {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
        {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
        {P₂ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation ? V₂}
```

```
          {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
          {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
          {a : @DomainTheory.NeighbourhoodSystems.ApproximableMap ? α V₂ V₀}
          {b : @DomainTheory.NeighbourhoodSystems.ApproximableMap ? β V₂ V₁},
          @DomainTheory.NeighbourhoodSystems.ComputableMap ? α V₂ V₀ P₂ P₀ a →
            @DomainTheory.NeighbourhoodSystems.ComputableMap ? β V₂ V₁ P₂ P₁ b →
              @DomainTheory.NeighbourhoodSystems.ComputableMap ? (Sum α β) V₂
                (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) P₂
                (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁)
                (@DomainTheory.NeighbourhoodSystems.paired α β ? V₀ V₁ V₂ a b)))
      (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
        {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
        {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
        {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
        {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
        {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
        {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
        {P₀' : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α' V₀'}
        {P₁' : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β' V₁'}
        {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀'}
        {g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'},
        @DomainTheory.NeighbourhoodSystems.ComputableMap α α' V₀ V₀' P₀ P₀' f →
          @DomainTheory.NeighbourhoodSystems.ComputableMap β β' V₁ V₁' P₁ P₁' g →
            @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α β) (Sum α' β')
              (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁)
              (@DomainTheory.NeighbourhoodSystems.prod α' β' V₀' V₁')
              (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁)
              (@DomainTheory.NeighbourhoodSystems.prodPresentation α' β' V₀' V₁' P₀'
P₁')
              (@DomainTheory.NeighbourhoodSystems.prodMap α β α' β' V₀ V₁ V₀' V₁' f g
)))
    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V₀
→
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven β V₁
 →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven (
Sum α β)
            (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁)))
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
    (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁),
    @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α β) α (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
      V₀ (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁) P₀
      (@DomainTheory.NeighbourhoodSystems.proj₀ α β V₀ V₁)))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁),
  @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α β) β (@DomainTheory.
```

```
  NeighbourhoodSystems.prod α β V₀ V₁)
    V₁ (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁) P₁
    (@DomainTheory.NeighbourhoodSystems.proj₁ α β V₀ V₁)) :=
@And.intro
(And
  (And
    (And
      (And
        (And
          (And
            (And
              (And
                (And
                  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
  NeighbourhoodSystems.NeighborhoodSystem α}
                    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                    {h₀ :
                      ∀ (X : Set α),
                        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
  V₀ X → @Set.Nonempty α X}
                    {h₁ :
                      ∀ (Y : Set β),
                        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
  V₁ Y → @Set.Nonempty β Y},
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  IsEffectivelyGiven α V₀ →
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  IsEffectivelyGiven β V₁ →
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  IsEffectivelyGiven (Option (Sum α β))
                        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
                (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
  NeighbourhoodSystems.NeighborhoodSystem α}
                  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                  {h₀ :
                    ∀ (X : Set α),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
  V₀ X → @Set.Nonempty α X}
                  {h₁ :
                    ∀ (Y : Set β),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
  V₁ Y → @Set.Nonempty β Y}
                  (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
   V₀)
                  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β
   V₁),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap α (Option (Sum
  α β)) V₀
                    (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₀
                    (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h
  ₀ h₁ P₀ P₁)
                    (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁)))
              (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
  NeighbourhoodSystems.NeighborhoodSystem α}
                {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                {h₀ :
```

```
                  ∀ (X : Set α),
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
X → @Set.Nonempty α X}
                {h₁ :
                  ∀ (Y : Set β),
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
Y → @Set.Nonempty β Y}
                (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V
₀)
                (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V
₁),
                @DomainTheory.NeighbourhoodSystems.ComputableMap β (Option (Sum α
β)) V₁
                  (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₁
                  (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀
h₁ P₀ P₁)
                  (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁)))
            (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
              {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
              {h₀ :
                ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V₀ X → @Set.Nonempty α X}
              {h₁ :
                ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem β V₁ Y → @Set.Nonempty β Y}
              (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
              (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
,
              @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
α
                (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₀
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁
 P₀ P₁) P₀
                (@DomainTheory.NeighbourhoodSystems.outMap₀ α β V₀ V₁ h₀ h₁)))
          (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
            {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
            {h₀ :
              ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.mem α V₀ X → @Set.Nonempty α X}
            {h₁ :
              ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.mem β V₁ Y → @Set.Nonempty β Y}
            (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
            (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁),
            @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β)) β
              (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₁
              (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁ P₀
 P₁) P₁
              (@DomainTheory.NeighbourhoodSystems.outMap₁ α β V₀ V₁ h₀ h₁)))
        (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
          {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
          {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
          {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V₀ X → @Set.Nonempty α X}
```

```
          {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem β V₁ Y → @Set.Nonempty β Y}
          {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
          {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
          {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
          {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
          {h₀' :
            ∀ (X : Set α'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
mem α' V₀' X → @Set.Nonempty α' X}
          {h₁' :
            ∀ (Y : Set β'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
mem β' V₁' Y → @Set.Nonempty β' Y}
          (Q₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α' V₀')
          (Q₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β' V₁')
          {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀'}
          {g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'},
          @DomainTheory.NeighbourhoodSystems.ComputableMap α α' V₀ V₀' P₀ Q₀ f →
            @DomainTheory.NeighbourhoodSystems.ComputableMap β β' V₁ V₁' P₁ Q₁ g →
              @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
(Option (Sum α' β'))
                (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
                (@DomainTheory.NeighbourhoodSystems.sum α' β' V₀' V₁' h₀' h₁')
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁
 P₀ P₁)
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α' β' V₀' V₁' h
₀' h₁' Q₀ Q₁)
                (@DomainTheory.NeighbourhoodSystems.sumMap α β α' β' V₀ V₁ V₀' V₁'
h₀ h₁ h₀' h₁' f g)))
      (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
        {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
        {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
        {P₂ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation ? V₂}
        {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
        {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
        {a : @DomainTheory.NeighbourhoodSystems.ApproximableMap ? α V₂ V₀}
        {b : @DomainTheory.NeighbourhoodSystems.ApproximableMap ? β V₂ V₁},
        @DomainTheory.NeighbourhoodSystems.ComputableMap ? α V₂ V₀ P₂ P₀ a →
          @DomainTheory.NeighbourhoodSystems.ComputableMap ? β V₂ V₁ P₂ P₁ b →
            @DomainTheory.NeighbourhoodSystems.ComputableMap ? (Sum α β) V₂
              (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) P₂
              (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁)
              (@DomainTheory.NeighbourhoodSystems.paired α β ? V₀ V₁ V₂ a b)))
    (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
      {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
      {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
      {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
      {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
      {P₀' : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α' V₀'}
      {P₁' : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β' V₁'}
      {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀'}
      {g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'},
      @DomainTheory.NeighbourhoodSystems.ComputableMap α α' V₀ V₀' P₀ P₀' f →
        @DomainTheory.NeighbourhoodSystems.ComputableMap β β' V₁ V₁' P₁ P₁' g →
```

```
            @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α β) (Sum α' β')
              (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁)
              (@DomainTheory.NeighbourhoodSystems.prod α' β' V₀' V₁')
              (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁)
              (@DomainTheory.NeighbourhoodSystems.prodPresentation α' β' V₀' V₁' P₀'
 P₁')
              (@DomainTheory.NeighbourhoodSystems.prodMap α β α' β' V₀ V₁ V₀' V₁' f g
 )))
   (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
     {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V₀
 →
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven β V₁
  →
         @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven (
 Sum α β)


            (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁)))
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
    (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁),
    @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α β) α (@DomainTheory.
 NeighbourhoodSystems.prod α β V₀ V₁)
     V₀ (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁) P₀
     (@DomainTheory.NeighbourhoodSystems.proj₀ α β V₀ V₁)))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁),
  @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α β) β (@DomainTheory.
 NeighbourhoodSystems.prod α β V₀ V₁)
    V₁ (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁) P₁
    (@DomainTheory.NeighbourhoodSystems.proj₁ α β V₀ V₁))
(@And.intro
  (And
    (And
      (And
        (And
          (And
            (And
              (And
                (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
 NeighbourhoodSystems.NeighborhoodSystem α}
                   {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                   {h₀ :
                     ∀ (X : Set α),
                       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
 V₀ X → @Set.Nonempty α X}
                   {h₁ :
                     ∀ (Y : Set β),
                       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
```

```
V₁ Y → @Set.Nonempty β Y},
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven α V₀ →
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven β V₁ →
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven (Option (Sum α β))
                        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
                (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                  {h₀ :
                    ∀ (X : Set α),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                  {h₁ :
                    ∀ (Y : Set β),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y}
                  (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V₀)
                  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β
 V₁),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap α (Option (Sum
α β)) V₀
                    (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₀
                    (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h
₀ h₁ P₀ P₁)
                    (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁)))
              (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                {h₀ :
                  ∀ (X : Set α),
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
X → @Set.Nonempty α X}
                {h₁ :
                  ∀ (Y : Set β),
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
Y → @Set.Nonempty β Y}
                (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V
₀)
                (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V
₁),
                @DomainTheory.NeighbourhoodSystems.ComputableMap β (Option (Sum α
β)) V₁
                  (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₁
                  (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀
h₁ P₀ P₁)
                  (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁)))
            (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
              {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
              {h₀ :
                ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V₀ X → @Set.Nonempty α X}
```

```
              {h₁ :
                ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem β V₁ Y → @Set.Nonempty β Y}
              (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
              (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
,
              @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
α
                (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₀
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁
 P₀ P₁) P₀
                (@DomainTheory.NeighbourhoodSystems.outMap₀ α β V₀ V₁ h₀ h₁)))
            (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
              {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
              {h₀ :
                ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.mem α V₀ X → @Set.Nonempty α X}
              {h₁ :
                ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.mem β V₁ Y → @Set.Nonempty β Y}
              (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
              (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁),
              @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β)) β
                (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₁
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁ P₀
 P₁) P₁
                (@DomainTheory.NeighbourhoodSystems.outMap₁ α β V₀ V₁ h₀ h₁)))
          (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
            {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
            {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
            {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V₀ X → @Set.Nonempty α X}
            {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem β V₁ Y → @Set.Nonempty β Y}
            {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
            {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
            {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
            {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
            {h₀' :
              ∀ (X : Set α'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
mem α' V₀' X → @Set.Nonempty α' X}
            {h₁' :
              ∀ (Y : Set β'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
mem β' V₁' Y → @Set.Nonempty β' Y}
            (Q₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α' V₀')
            (Q₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β' V₁')
            {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀'}
            {g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'},
            @DomainTheory.NeighbourhoodSystems.ComputableMap α α' V₀ V₀' P₀ Q₀ f →
              @DomainTheory.NeighbourhoodSystems.ComputableMap β β' V₁ V₁' P₁ Q₁ g →
                @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
(Option (Sum α' β'))
                  (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
                  (@DomainTheory.NeighbourhoodSystems.sum α' β' V₀' V₁' h₀' h₁')
                  (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁
```

```
 P₀ P₁)
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α' β' V₀' V₁' h
₀' h₁' Q₀ Q₁)
                (@DomainTheory.NeighbourhoodSystems.sumMap α β α' β' V₀ V₁ V₀' V₁'
h₀ h₁ h₀' h₁' f g)))
      (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
        {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
        {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
        {P₂ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation ? V₂}
        {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
        {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
        {a : @DomainTheory.NeighbourhoodSystems.ApproximableMap ? α V₂ V₀}
        {b : @DomainTheory.NeighbourhoodSystems.ApproximableMap ? β V₂ V₁},
        @DomainTheory.NeighbourhoodSystems.ComputableMap ? α V₂ V₀ P₂ P₀ a →
          @DomainTheory.NeighbourhoodSystems.ComputableMap ? β V₂ V₁ P₂ P₁ b →
            @DomainTheory.NeighbourhoodSystems.ComputableMap ? (Sum α β) V₂
              (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) P₂
              (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁)
              (@DomainTheory.NeighbourhoodSystems.paired α β ? V₀ V₁ V₂ a b)))
    (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
      {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
      {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
      {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
      {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
      {P₀' : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α' V₀'}
      {P₁' : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β' V₁'}
      {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀'}
      {g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'},
      @DomainTheory.NeighbourhoodSystems.ComputableMap α α' V₀ V₀' P₀ P₀' f →
        @DomainTheory.NeighbourhoodSystems.ComputableMap β β' V₁ V₁' P₁ P₁' g →
          @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α β) (Sum α' β')
            (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁)
            (@DomainTheory.NeighbourhoodSystems.prod α' β' V₀' V₁')
            (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁)
            (@DomainTheory.NeighbourhoodSystems.prodPresentation α' β' V₀' V₁' P₀'
P₁')
            (@DomainTheory.NeighbourhoodSystems.prodMap α β α' β' V₀ V₁ V₀' V₁' f g
)))
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V₀
→
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven β V₁
 →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven (
Sum α β)
          (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁)))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁),
```

```
  @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α β) α (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
    V₀ (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁) P₀
    (@DomainTheory.NeighbourhoodSystems.proj₀ α β V₀ V₁))
(@And.intro
  (And
    (And
      (And
        (And
          (And
            (And
              (And
                (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                  {h₀ :
                    ∀ (X : Set α),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                  {h₁ :
                    ∀ (Y : Set β),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y},
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven α V₀ →
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven β V₁ →
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven (Option (Sum α β))
                        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
                (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                  {h₀ :
                    ∀ (X : Set α),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                  {h₁ :
                    ∀ (Y : Set β),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y}
                  (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V₀)
                  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β
 V₁),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap α (Option (Sum
α β)) V₀
                    (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₀
                    (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h
₀ h₁ P₀ P₁)
                    (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁)))
              (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                {h₀ :
                  ∀ (X : Set α),
```

```
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
X → @Set.Nonempty α X}
                {h₁ :
                  ∀ (Y : Set β),
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
Y → @Set.Nonempty β Y}
                (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V
₀)
                (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V
₁),
                @DomainTheory.NeighbourhoodSystems.ComputableMap β (Option (Sum α
β)) V₁
                  (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₁
                  (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀
h₁ P₀ P₁)
                  (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁)))
            (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
              {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
              {h₀ :
                ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V₀ X → @Set.Nonempty α X}
              {h₁ :
                ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem β V₁ Y → @Set.Nonempty β Y}
              (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
              (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
,
              @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
α
                (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₀
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁
 P₀ P₁) P₀
                (@DomainTheory.NeighbourhoodSystems.outMap₀ α β V₀ V₁ h₀ h₁)))
          (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
            {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
            {h₀ :
              ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.mem α V₀ X → @Set.Nonempty α X}
            {h₁ :
              ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.mem β V₁ Y → @Set.Nonempty β Y}
            (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
            (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁),
            @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β)) β
              (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₁
              (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁ P₀
 P₁) P₁
              (@DomainTheory.NeighbourhoodSystems.outMap₁ α β V₀ V₁ h₀ h₁)))
        (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
          {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
          {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
          {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V₀ X → @Set.Nonempty α X}
          {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
```

```
NeighborhoodSystem.mem β V₁ Y → @Set.Nonempty β Y}
          {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
          {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
          {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
          {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
          {h₀' :
            ∀ (X : Set α'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
mem α' V₀' X → @Set.Nonempty α' X}
          {h₁' :
            ∀ (Y : Set β'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
mem β' V₁' Y → @Set.Nonempty β' Y}
          (Q₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α' V₀')
          (Q₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β' V₁')
          {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀'}
          {g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'},
          @DomainTheory.NeighbourhoodSystems.ComputableMap α α' V₀ V₀' P₀ Q₀ f →
            @DomainTheory.NeighbourhoodSystems.ComputableMap β β' V₁ V₁' P₁ Q₁ g →
              @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
(Option (Sum α' β'))
                (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
                (@DomainTheory.NeighbourhoodSystems.sum α' β' V₀' V₁' h₀' h₁')
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁
 P₀ P₁)
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α' β' V₀' V₁' h
₀' h₁' Q₀ Q₁)
                (@DomainTheory.NeighbourhoodSystems.sumMap α β α' β' V₀ V₁ V₀' V₁'
h₀ h₁ h₀' h₁' f g)))
      (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
        {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
        {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
        {P₂ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation ? V₂}
        {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
        {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
        {a : @DomainTheory.NeighbourhoodSystems.ApproximableMap ? α V₂ V₀}
        {b : @DomainTheory.NeighbourhoodSystems.ApproximableMap ? β V₂ V₁},
        @DomainTheory.NeighbourhoodSystems.ComputableMap ? α V₂ V₀ P₂ P₀ a →
          @DomainTheory.NeighbourhoodSystems.ComputableMap ? β V₂ V₁ P₂ P₁ b →
            @DomainTheory.NeighbourhoodSystems.ComputableMap ? (Sum α β) V₂
              (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) P₂
              (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁)
              (@DomainTheory.NeighbourhoodSystems.paired α β ? V₀ V₁ V₂ a b)))
    (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
      {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
      {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
      {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
      {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
      {P₀' : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α' V₀'}
      {P₁' : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β' V₁'}
      {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀'}
      {g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'},
      @DomainTheory.NeighbourhoodSystems.ComputableMap α α' V₀ V₀' P₀ P₀' f →
        @DomainTheory.NeighbourhoodSystems.ComputableMap β β' V₁ V₁' P₁ P₁' g →
          @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α β) (Sum α' β')
```

```
            (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁)
            (@DomainTheory.NeighbourhoodSystems.prod α' β' V₀' V₁')
            (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁)
            (@DomainTheory.NeighbourhoodSystems.prodPresentation α' β' V₀' V₁' P₀'
P₁')
            (@DomainTheory.NeighbourhoodSystems.prodMap α β α' β' V₀ V₁ V₀' V₁' f g
)))
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V₀
→
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven β V₁
 →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven (
Sum α β)
          (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁))
  (@And.intro
    (And
      (And
        (And
          (And
            (And
              (And
                (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                  {h₀ :
                    ∀ (X : Set α),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                  {h₁ :
                    ∀ (Y : Set β),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y},
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven α V₀ →
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven β V₁ →
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven (Option (Sum α β))
                      (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
              (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                {h₀ :
                  ∀ (X : Set α),
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                {h₁ :
                  ∀ (Y : Set β),
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y}
                (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V₀)
                (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β
```

```
 V₁),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap α (Option (Sum
α β)) V₀
                    (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₀
                    (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h
₀ h₁ P₀ P₁)
                    (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁)))
               (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                 {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                 {h₀ :
                   ∀ (X : Set α),
                     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
X → @Set.Nonempty α X}
                 {h₁ :
                   ∀ (Y : Set β),
                     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
Y → @Set.Nonempty β Y}
                 (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V
₀)
                 (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V
₁),
                 @DomainTheory.NeighbourhoodSystems.ComputableMap β (Option (Sum α
β)) V₁
                   (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₁
                   (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀
h₁ P₀ P₁)
                   (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁)))
             (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
               {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
               {h₀ :
                 ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V₀ X → @Set.Nonempty α X}
               {h₁ :
                 ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem β V₁ Y → @Set.Nonempty β Y}
               (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
               (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
,
               @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
α
                 (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₀
                 (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁
 P₀ P₁) P₀
                 (@DomainTheory.NeighbourhoodSystems.outMap₀ α β V₀ V₁ h₀ h₁)))
          (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
            {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
            {h₀ :
              ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.mem α V₀ X → @Set.Nonempty α X}
            {h₁ :
              ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.mem β V₁ Y → @Set.Nonempty β Y}
            (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
```

```
            (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁),
            @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β)) β
              (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₁
              (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁ P₀
 P₁) P₁
              (@DomainTheory.NeighbourhoodSystems.outMap₁ α β V₀ V₁ h₀ h₁)))
        (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
          {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
          {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
          {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V₀ X → @Set.Nonempty α X}
          {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem β V₁ Y → @Set.Nonempty β Y}
          {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
          {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
          {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
          {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
          {h₀' :
            ∀ (X : Set α'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
mem α' V₀' X → @Set.Nonempty α' X}
          {h₁' :
            ∀ (Y : Set β'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
mem β' V₁' Y → @Set.Nonempty β' Y}
          (Q₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α' V₀')
          (Q₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β' V₁')
          {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀'}
          {g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'},
          @DomainTheory.NeighbourhoodSystems.ComputableMap α α' V₀ V₀' P₀ Q₀ f →
            @DomainTheory.NeighbourhoodSystems.ComputableMap β β' V₁ V₁' P₁ Q₁ g →
              @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
(Option (Sum α' β'))
                (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
                (@DomainTheory.NeighbourhoodSystems.sum α' β' V₀' V₁' h₀' h₁')
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁
 P₀ P₁)
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α' β' V₀' V₁' h
₀' h₁' Q₀ Q₁)
                (@DomainTheory.NeighbourhoodSystems.sumMap α β α' β' V₀ V₁ V₀' V₁'
h₀ h₁ h₀' h₁' f g)))
      (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
        {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
        {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
        {P₂ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation ? V₂}
        {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
        {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
        {a : @DomainTheory.NeighbourhoodSystems.ApproximableMap ? α V₂ V₀}
        {b : @DomainTheory.NeighbourhoodSystems.ApproximableMap ? β V₂ V₁},
        @DomainTheory.NeighbourhoodSystems.ComputableMap ? α V₂ V₀ P₂ P₀ a →

          @DomainTheory.NeighbourhoodSystems.ComputableMap ? β V₂ V₁ P₂ P₁ b →
            @DomainTheory.NeighbourhoodSystems.ComputableMap ? (Sum α β) V₂
              (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) P₂
              (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁)
              (@DomainTheory.NeighbourhoodSystems.paired α β ? V₀ V₁ V₂ a b)))
    (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
```

```
       {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
       {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
       {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
       {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
       {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
       {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
       {P₀' : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α' V₀'}
       {P₁' : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β' V₁'}
       {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀'}
       {g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'},
       @DomainTheory.NeighbourhoodSystems.ComputableMap α α' V₀ V₀' P₀ P₀' f →
         @DomainTheory.NeighbourhoodSystems.ComputableMap β β' V₁ V₁' P₁ P₁' g →
           @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α β) (Sum α' β')
             (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁)
             (@DomainTheory.NeighbourhoodSystems.prod α' β' V₀' V₁')
             (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁)
             (@DomainTheory.NeighbourhoodSystems.prodPresentation α' β' V₀' V₁' P₀'
P₁')
             (@DomainTheory.NeighbourhoodSystems.prodMap α β α' β' V₀ V₁ V₀' V₁' f g
))
     (@And.intro
       (And
         (And
           (And
             (And
               (And
                 (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                   {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                   {h₀ :
                     ∀ (X : Set α),
                       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                   {h₁ :
                     ∀ (Y : Set β),
                       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y},
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven α V₀ →
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven β V₁ →
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven (Option (Sum α β))
                        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
                (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                   {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                   {h₀ :
                     ∀ (X : Set α),
                       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                   {h₁ :
                     ∀ (Y : Set β),
                       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y}
                   (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
```

```
 V₀)
                  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β
 V₁),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap α (Option (Sum
α β)) V₀
                    (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₀
                    (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h
₀ h₁ P₀ P₁)
                    (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁)))
               (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                 {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                 {h₀ :
                   ∀ (X : Set α),
                     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
X → @Set.Nonempty α X}
                 {h₁ :
                   ∀ (Y : Set β),
                     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
Y → @Set.Nonempty β Y}
                 (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V
₀)
                 (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V
₁),
                 @DomainTheory.NeighbourhoodSystems.ComputableMap β (Option (Sum α
β)) V₁
                   (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₁
                   (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀
h₁ P₀ P₁)
                   (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁)))
             (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
               {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
               {h₀ :
                 ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V₀ X → @Set.Nonempty α X}
               {h₁ :
                 ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem β V₁ Y → @Set.Nonempty β Y}
               (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
               (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
,
               @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
α
                 (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₀
                 (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁
 P₀ P₁) P₀
                 (@DomainTheory.NeighbourhoodSystems.outMap₀ α β V₀ V₁ h₀ h₁)))
           (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
             {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
             {h₀ :
               ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.mem α V₀ X → @Set.Nonempty α X}
             {h₁ :
               ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
```

```
.mem β V₁ Y → @Set.Nonempty β Y}
            (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
            (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁),
            @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β)) β
              (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₁
              (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁ P₀
 P₁) P₁
              (@DomainTheory.NeighbourhoodSystems.outMap₁ α β V₀ V₁ h₀ h₁)))
        (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
          {V₀ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
          {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
          {h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V₀ X → @Set.Nonempty α X}
          {h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem β V₁ Y → @Set.Nonempty β Y}
          {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
          {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
          {V₀' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
          {V₁' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
          {h₀' :
            ∀ (X : Set α'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
mem α' V₀' X → @Set.Nonempty α' X}
          {h₁' :
            ∀ (Y : Set β'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
mem β' V₁' Y → @Set.Nonempty β' Y}
          (Q₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α' V₀')
          (Q₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β' V₁')
          {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀'}
          {g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'},
          @DomainTheory.NeighbourhoodSystems.ComputableMap α α' V₀ V₀' P₀ Q₀ f →
            @DomainTheory.NeighbourhoodSystems.ComputableMap β β' V₁ V₁' P₁ Q₁ g →
              @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
(Option (Sum α' β'))
                (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
                (@DomainTheory.NeighbourhoodSystems.sum α' β' V₀' V₁' h₀' h₁')
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁
 P₀ P₁)
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α' β' V₀' V₁' h
₀' h₁' Q₀ Q₁)
                (@DomainTheory.NeighbourhoodSystems.sumMap α β α' β' V₀ V₁ V₀' V₁'
h₀ h₁ h₀' h₁' f g)))
      (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
        {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
        {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
        {P₂ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation ? V₂}
        {P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀}
        {P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁}
        {a : @DomainTheory.NeighbourhoodSystems.ApproximableMap ? α V₂ V₀}
        {b : @DomainTheory.NeighbourhoodSystems.ApproximableMap ? β V₂ V₁},
        @DomainTheory.NeighbourhoodSystems.ComputableMap ? α V₂ V₀ P₂ P₀ a →
          @DomainTheory.NeighbourhoodSystems.ComputableMap ? β V₂ V₁ P₂ P₁ b →
            @DomainTheory.NeighbourhoodSystems.ComputableMap ? (Sum α β) V₂
              (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) P₂
              (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁)
              (@DomainTheory.NeighbourhoodSystems.paired α β ? V₀ V₁ V₂ a b))
```

```
       (@And.intro
         (And
           (And
             (And
               (And
                 (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                   {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                   {h₀ :
                     ∀ (X : Set α),
                       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                   {h₁ :
                     ∀ (Y : Set β),
                       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y},
                 @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven α V₀ →
                   @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven β V₁ →
                     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven (Option (Sum α β))
                       (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
               (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                 {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                 {h₀ :
                   ∀ (X : Set α),
                     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                 {h₁ :
                   ∀ (Y : Set β),
                     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y}
                 (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V₀)
                 (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β
 V₁),
                 @DomainTheory.NeighbourhoodSystems.ComputableMap α (Option (Sum
α β)) V₀
                   (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₀
                   (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h
₀ h₁ P₀ P₁)
                   (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁)))
             (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
               {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
               {h₀ :
                 ∀ (X : Set α),
                   @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
X → @Set.Nonempty α X}
               {h₁ :
                 ∀ (Y : Set β),
                   @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
Y → @Set.Nonempty β Y}
               (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V
```

```
0)
                (P1 : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V
1),
                @DomainTheory.NeighbourhoodSystems.ComputableMap β (Option (Sum α
β)) V1
                  (@DomainTheory.NeighbourhoodSystems.sum α β V0 V1 h0 h1) P1
                  (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V0 V1 h0
h1 P0 P1)
                  (@DomainTheory.NeighbourhoodSystems.inMap1 α β V0 V1 h0 h1)))
            (∀ {α : Type u_1} {β : Type u_2} {V0 : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
              {V1 : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
              {h0 :
                ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V0 X → @Set.Nonempty α X}
              {h1 :
                ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem β V1 Y → @Set.Nonempty β Y}
              (P0 : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V0)
              (P1 : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V1)
,
              @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
α
                (@DomainTheory.NeighbourhoodSystems.sum α β V0 V1 h0 h1) V0
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V0 V1 h0 h1
 P0 P1) P0
                (@DomainTheory.NeighbourhoodSystems.outMap0 α β V0 V1 h0 h1)))
          (∀ {α : Type u_1} {β : Type u_2} {V0 : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
            {V1 : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
            {h0 :
              ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.mem α V0 X → @Set.Nonempty α X}
            {h1 :
              ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.mem β V1 Y → @Set.Nonempty β Y}
            (P0 : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V0)
            (P1 : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V1),
            @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β)) β
              (@DomainTheory.NeighbourhoodSystems.sum α β V0 V1 h0 h1) V1
              (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V0 V1 h0 h1 P0
 P1) P1
              (@DomainTheory.NeighbourhoodSystems.outMap1 α β V0 V1 h0 h1)))
        (∀ {α : Type u_1} {β : Type u_2} {α' : Type u_4} {β' : Type u_5}
          {V0 : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
          {V1 : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
          {h0 : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V0 X → @Set.Nonempty α X}
          {h1 : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem β V1 Y → @Set.Nonempty β Y}
          {P0 : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V0}
          {P1 : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V1}
          {V0' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α'}
          {V1' : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β'}
          {h0' :
            ∀ (X : Set α'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
```

```
mem α' V₀' X → @Set.Nonempty α' X}
          {h₁' :
            ∀ (Y : Set β'), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
mem β' V₁' Y → @Set.Nonempty β' Y}
          (Q₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α' V₀')
          (Q₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β' V₁')
          {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α' V₀ V₀'}
          {g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β β' V₁ V₁'},
          @DomainTheory.NeighbourhoodSystems.ComputableMap α α' V₀ V₀' P₀ Q₀ f →
            @DomainTheory.NeighbourhoodSystems.ComputableMap β β' V₁ V₁' P₁ Q₁ g →
              @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
(Option (Sum α' β'))
                (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁)
                (@DomainTheory.NeighbourhoodSystems.sum α' β' V₀' V₁' h₀' h₁')
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁
 P₀ P₁)
                (@DomainTheory.NeighbourhoodSystems.sumPresentation α' β' V₀' V₁' h
₀' h₁' Q₀ Q₁)
                (@DomainTheory.NeighbourhoodSystems.sumMap α β α' β' V₀ V₁ V₀' V₁'
h₀ h₁ h₀' h₁' f g))
        (@And.intro
          (And
            (And
              (And
                (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                  {h₀ :
                    ∀ (X : Set α),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                  {h₁ :
                    ∀ (Y : Set β),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y},
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven α V₀ →
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven β V₁ →
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven (Option (Sum α β))
                        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
                (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                  {h₀ :
                    ∀ (X : Set α),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                  {h₁ :
                    ∀ (Y : Set β),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y}
                  (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V₀)
                  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β
```

```
 V₁),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap α (Option (Sum
α β)) V₀
                    (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₀
                    (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h
₀ h₁ P₀ P₁)
                    (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁)))
               (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                 {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                 {h₀ :
                   ∀ (X : Set α),
                     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
X → @Set.Nonempty α X}
                 {h₁ :
                   ∀ (Y : Set β),
                     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
Y → @Set.Nonempty β Y}
                 (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V
₀)
                 (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V
₁),
                 @DomainTheory.NeighbourhoodSystems.ComputableMap β (Option (Sum α
β)) V₁
                   (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₁
                   (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀
h₁ P₀ P₁)
                   (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁)))
             (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
               {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
               {h₀ :
                 ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V₀ X → @Set.Nonempty α X}
               {h₁ :
                 ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem β V₁ Y → @Set.Nonempty β Y}
               (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
               (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
,
               @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
α
                 (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₀
                 (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁
 P₀ P₁) P₀
                 (@DomainTheory.NeighbourhoodSystems.outMap₀ α β V₀ V₁ h₀ h₁)))
          (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
            {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
            {h₀ :
              ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.mem α V₀ X → @Set.Nonempty α X}
            {h₁ :
              ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.mem β V₁ Y → @Set.Nonempty β Y}
            (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
```

```
            (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁),
            @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β)) β
              (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₁
              (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁ P₀
 P₁) P₁
              (@DomainTheory.NeighbourhoodSystems.outMap₁ α β V₀ V₁ h₀ h₁))
          (@And.intro
            (And
              (And
                (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                  {h₀ :
                    ∀ (X : Set α),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                  {h₁ :
                    ∀ (Y : Set β),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y},
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven α V₀ →
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven β V₁ →
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven (Option (Sum α β))
                        (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
                (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                  {h₀ :
                    ∀ (X : Set α),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                  {h₁ :
                    ∀ (Y : Set β),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y}
                  (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V₀)
                  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β
 V₁),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap α (Option (Sum
α β)) V₀
                    (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₀
                    (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h
₀ h₁ P₀ P₁)
                    (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁)))
              (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                {h₀ :
                  ∀ (X : Set α),
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
X → @Set.Nonempty α X}
                {h₁ :
```

```
                  ∀ (Y : Set β),
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
Y → @Set.Nonempty β Y}
                (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V
₀)
                (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V
₁),
                @DomainTheory.NeighbourhoodSystems.ComputableMap β (Option (Sum α
β)) V₁
                  (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₁
                  (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀
h₁ P₀ P₁)
                  (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁)))
             (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
               {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
               {h₀ :
                 ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem α V₀ X → @Set.Nonempty α X}
               {h₁ :
                 ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.mem β V₁ Y → @Set.Nonempty β Y}
               (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
               (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
,
               @DomainTheory.NeighbourhoodSystems.ComputableMap (Option (Sum α β))
α
                 (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) V₀
                 (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀ h₁
 P₀ P₁) P₀
                 (@DomainTheory.NeighbourhoodSystems.outMap₀ α β V₀ V₁ h₀ h₁))
             (@And.intro
               (And
                 (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                   {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                   {h₀ :
                     ∀ (X : Set α),
                       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                   {h₁ :
                     ∀ (Y : Set β),
                       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y},
                   @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven α V₀ →
                     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven β V₁ →
                       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven (Option (Sum α β))
                         (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
                 (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                   {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                   {h₀ :
                     ∀ (X : Set α),
```

```
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                  {h₁ :
                    ∀ (Y : Set β),
                      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y}
                  (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V₀)
                  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β
 V₁),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap α (Option (Sum
α β)) V₀
                    (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₀
                    (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h
₀ h₁ P₀ P₁)
                    (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁)))
               (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                 {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                 {h₀ :
                   ∀ (X : Set α),
                     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V₀
X → @Set.Nonempty α X}
                 {h₁ :
                   ∀ (Y : Set β),
                     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β V₁
Y → @Set.Nonempty β Y}
                 (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V
₀)
                 (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V
₁),
                 @DomainTheory.NeighbourhoodSystems.ComputableMap β (Option (Sum α
β)) V₁
                   (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₁
                   (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h₀
h₁ P₀ P₁)
                   (@DomainTheory.NeighbourhoodSystems.inMap₁ α β V₀ V₁ h₀ h₁))
               (@And.intro
                 (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
                   {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                   {h₀ :
                     ∀ (X : Set α),
                       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
V₀ X → @Set.Nonempty α X}
                   {h₁ :
                     ∀ (Y : Set β),


                       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
V₁ Y → @Set.Nonempty β Y},
                   @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven α V₀ →
                     @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven β V₁ →
                       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
IsEffectivelyGiven (Option (Sum α β))
```

```
                          (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁))
                    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.
    NeighbourhoodSystems.NeighborhoodSystem α}
                     {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
                     {h₀ :
                       ∀ (X : Set α),
                         @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
    V₀ X → @Set.Nonempty α X}
                     {h₁ :
                       ∀ (Y : Set β),
                         @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
    V₁ Y → @Set.Nonempty β Y}
                     (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
     V₀)
                     (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β
     V₁),
                     @DomainTheory.NeighbourhoodSystems.ComputableMap α (Option (Sum
    α β)) V₀
                       (@DomainTheory.NeighbourhoodSystems.sum α β V₀ V₁ h₀ h₁) P₀
                       (@DomainTheory.NeighbourhoodSystems.sumPresentation α β V₀ V₁ h
    ₀ h₁ P₀ P₁)
                       (@DomainTheory.NeighbourhoodSystems.inMap₀ α β V₀ V₁ h₀ h₁))
                   @DomainTheory.NeighbourhoodSystems.sum_isEffectivelyGiven
                   @DomainTheory.NeighbourhoodSystems.inMap₀_isComputable)
                 @DomainTheory.NeighbourhoodSystems.inMap₁_isComputable)
               @DomainTheory.NeighbourhoodSystems.outMap₀_isComputable)
             @DomainTheory.NeighbourhoodSystems.outMap₁_isComputable)
           @DomainTheory.NeighbourhoodSystems.sumMap_isComputable)
         @DomainTheory.NeighbourhoodSystems.paired_isComputable)
       @DomainTheory.NeighbourhoodSystems.prodMap_isComputable)
     @DomainTheory.NeighbourhoodSystems.prod_isEffectivelyGiven)
   @DomainTheory.NeighbourhoodSystems.proj₀_isComputable)
 @DomainTheory.NeighbourhoodSystems.proj₁_isComputable
end

section
variable {α β ? : Type*}

structure ScottPresentation (V : NeighborhoodSystem α) where

  X : ℕ → Set α

  mem_X : ∀ n, V.mem (X n)

  surj : ∀ {Y : Set α}, V.mem Y → ∃ n, X n = Y

  interEq_computable : RecDecidable₃ (fun n m k => X n ∩ X m = X k)

  cons_computable : RecDecidable₂ (fun n m => ∃ k, X k ⊆ X n ∩ X m)

class ComputableMapS {V : NeighborhoodSystem α} {W : NeighborhoodSystem β}
    (P : ScottPresentation V) (Q : ScottPresentation W) (f : ApproximableMap V W) :
    Prop where
  out : REPred₂ (fun n m => f.rel (P.X n) (Q.X m))

def NeighborhoodSystem.IsEffectivelyGivenS (V : NeighborhoodSystem α) : Prop :=
```

```
  Nonempty (ScottPresentation V)

namespace ScottPresentation

variable {V : NeighborhoodSystem α} (P : ScottPresentation V)

def inclShuffle (t : ℕ) : ℕ := Nat.pair t.unpair.1 (Nat.pair t.unpair.2 t.unpair.1)

theorem primrec_inclShuffle : Nat.Primrec inclShuffle :=
  Nat.Primrec.pair Nat.Primrec.left (Nat.Primrec.pair Nat.Primrec.right Nat.Primrec.
    left)

theorem incl_computable : RecDecidable₂ (fun n m => P.X n ⊆ P.X m) := by
  refine RecDecidable.of_iff (fun t => ?_) (P.interEq_computable.comp
    primrec_inclShuffle)
  simp only [inclShuffle, unpair_pair_fst, unpair_pair_snd]
  exact Set.inter_eq_left.symm

end ScottPresentation

end

section
variable {α β ? : Type*}
open Exercise510

section Smash

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

open scoped Classical in

noncomputable def smashEnum (t : ℕ) : Set (α ? β) :=
  if P₀.X t.unpair.1 = V₀.master ∧ P₁.X t.unpair.2 = V₁.master then
    prodNbhd (P₀.X t.unpair.1) (P₁.X t.unpair.2)
  else prodNbhd V₀.master V₁.master

end Smash

section Smash

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

variable {P₀ P₁}

open scoped Classical in
theorem smashEnum_master {t : ℕ}
    (h : ¬(P₀.X t.unpair.1 = V₀.master ∧ P₁.X t.unpair.2 = V₁.master)) :
    smashEnum P₀ P₁ t = prodNbhd V₀.master V₁.master := ite_eq_right h

open scoped Classical in
theorem smashEnum_proper {t : ℕ}
    (h : P₀.X t.unpair.1 = V₀.master ∧ P₁.X t.unpair.2 = V₁.master) :
    smashEnum P₀ P₁ t = prodNbhd (P₀.X t.unpair.1) (P₁.X t.unpair.2) := ite_eq_left h
```

```
theorem smashEnum_eq_eff {c₀ c₁ : ℕ → ℕ} (hc₀le : ∀ n, c₀ n ≤ 1) (hc₁le : ∀ n, c₁ n ≤
    1)
    (hc₀ : ∀ n, P₀.X n = V₀.master ↔ c₀ n = 1) (hc₁ : ∀ n, P₁.X n = V₁.master ↔ c₁ n =
    1) (t : ℕ) :
    smashEnum P₀ P₁ t =
      prodNbhd (P₀.X (selectFn (c₀ t.unpair.1 * c₁ t.unpair.2) t.unpair.1 P₀.masterIdx)
    )
        (P₁.X (selectFn (c₀ t.unpair.1 * c₁ t.unpair.2) t.unpair.2 P₁.masterIdx)) := by
  by_cases h : P₀.X t.unpair.1 = V₀.master ∧ P₁.X t.unpair.2 = V₁.master
  · have e0 : c₀ t.unpair.1 = 1 := (hc₀ _).mp h.1
    have e1 : c₁ t.unpair.2 = 1 := (hc₁ _).mp h.2
    rw [smashEnum_proper h, e0, e1, mul_one, selectFn_one, selectFn_one]
  · rw [smashEnum_master h]
    have hpf : c₀ t.unpair.1 * c₁ t.unpair.2 = 0 := by
      rcases not_and_or.mp h with h0 | h1
      · have hz : c₀ t.unpair.1 = 0 := by
          have hle := hc₀le t.unpair.1
          rcases (show c₀ t.unpair.1 = 0 ∨ c₀ t.unpair.1 = 1 by omega) with h | h
          · exact h
          · exact absurd ((hc₀ _).mpr h) h0
        rw [hz, Nat.zero_mul]
      · have hz : c₁ t.unpair.2 = 0 := by
          have hle := hc₁le t.unpair.2
          rcases (show c₁ t.unpair.2 = 0 ∨ c₁ t.unpair.2 = 1 by omega) with h | h
          · exact h
          · exact absurd ((hc₁ _).mpr h) h1
        rw [hz, Nat.mul_zero]
    rw [hpf, selectFn_zero, selectFn_zero, P₀.masterIdx_spec, P₁.masterIdx_spec]

theorem smashEnum_eq_prodNbhd_mem (k : ℕ) :
    ∃ A B, V₀.mem A ∧ V₁.mem B ∧ smashEnum P₀ P₁ k = prodNbhd A B := by
  by_cases h : P₀.X k.unpair.1 = V₀.master ∧ P₁.X k.unpair.2 = V₁.master
  · exact ⟨_, _, P₀.mem_X _, P₁.mem_X _, smashEnum_proper h⟩
  · exact ⟨_, _, V₀.master_mem, V₁.master_mem, smashEnum_master h⟩

theorem smashEnum_mem (t : ℕ) : (smash V₀ V₁).mem (smashEnum P₀ P₁ t) := by
  by_cases h : P₀.X t.unpair.1 = V₀.master ∧ P₁.X t.unpair.2 = V₁.master
  · rw [smashEnum_proper h]; exact smash_mem_proper (P₀.mem_X _) h.1 (P₁.mem_X _) h.2
  · rw [smashEnum_master h]; exact (smash V₀ V₁).master_mem

theorem smashEnum_subset_master (k : ℕ) :
    smashEnum P₀ P₁ k ⊆ prodNbhd V₀.master V₁.master := by
  have h := (smash V₀ V₁).sub_master (smashEnum_mem (P₀ := P₀) (P₁ := P₁) k)
  rwa [smash_master] at h

end Smash

end

section
variable {α β ? : Type*}

namespace ScottPresentation

variable {V : NeighborhoodSystem α} (P : ScottPresentation V)
```

```
def swapPair (t : ℕ) : ℕ := Nat.pair t.unpair.2 t.unpair.1

theorem primrec_swapPair : Nat.Primrec swapPair :=
  Nat.Primrec.pair Nat.Primrec.right Nat.Primrec.left

theorem eq_computable : RecDecidable₂ (fun n m => P.X n = P.X m) := by
  refine RecDecidable.of_iff (fun t => ?_)
    (P.incl_computable.and (P.incl_computable.comp primrec_swapPair))
  simp only [swapPair, unpair_pair_fst, unpair_pair_snd]
  exact Set.Subset.antisymm_iff

end ScottPresentation
end

section
variable {α β ? : Type*}
open Exercise510

section Smash

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

variable {P₀ P₁}

variable (P₀ P₁)

theorem proper₀_dec : RecDecidable (fun n => P₀.X n = V₀.master) := by
  have heq : RecDecidable (fun n => P₀.X n = V₀.master) := by
    refine RecDecidable.of_iff (fun n => ?_)
      (P₀.eq_computable.comp (primrec_id.pair (Nat.Primrec.const P₀.masterIdx)))
    simp only [unpair_pair_fst, unpair_pair_snd, P₀.masterIdx_spec, id_eq]
  exact heq.not

theorem proper₁_dec : RecDecidable (fun n => P₁.X n = V₁.master) := by
  have heq : RecDecidable (fun n => P₁.X n = V₁.master) := by
    refine RecDecidable.of_iff (fun n => ?_)
      (P₁.eq_computable.comp (primrec_id.pair (Nat.Primrec.const P₁.masterIdx)))
    simp only [unpair_pair_fst, unpair_pair_snd, P₁.masterIdx_spec, id_eq]
  exact heq.not

end Smash

end
end DomainTheory.NeighbourhoodSystems
end
```

THEOREM 7.4. If $\mathcal{D}_0$ and $\mathcal{D}_1$ are effectively given, then so are $(\mathcal{D}_0 + \mathcal{D}_1)$ and $(\mathcal{D}_0 \times \mathcal{D}_1)$.

Moreover the combinators in_i and out_i and proj_i^2 are all computable; further, if f and g are computable maps, then so are $f + g$ and $f \times g$.

Proof: Let the computable presentations be given as:

$$\mathcal{D}_i = \{X_n^i \mid n \in \mathbf{N}\}.$$

We can assume that the sets of tokens Δ_0 and Δ_1 are disjoint and $\emptyset \notin \mathcal{D}_i$. Then the construction of the

sum is just

$$\mathcal{D}_0 + \mathcal{D}_1 = \{\Delta_0 \cup \Delta_1\} \cup \mathcal{D}_0 \cup \mathcal{D}_1.$$

As an enumeration we define for $n \in \mathbf{N}$:

$$Z_0 = \Delta_0 \cup \Delta_1 \; ; \; Z_{2n+1} = X^0_n \; ; \; Z_{2n+2} = X^1_n \; .$$

We leave as an exercise the check of 7.1(i)–(ii).

For the product we want:

$$\mathcal{D}_0 \times \mathcal{D}_1 = \{X^0_n \cup X^1_m \mid n, m \in \mathbf{N}\}.$$

What we then need are recursive functions $p : \mathbf{N} \to \mathbf{N}$, $q : \mathbf{N} \to \mathbf{N}$, and $r : \mathbf{N} \times \mathbf{N} \to \mathbf{N}$ where for $m, n, k \in \mathbf{N}$ we have:

$$p(r(n, m)) = n \text{ and } q(r(n, m)) = m, \text{ and } r(p(k), q(k)) = k.$$

Thus r is a "one-one pairing function"; there are many ways to find such functions (see Exercise 5.13). We can then define for $k \in \mathbf{N}$:

$$W_k = X^0_{p(k)} \cup X^1_{q(k)} \; .$$

Again we leave as an exercise the check that this provides a computable presentation of $\mathcal{D}_0 \times \mathcal{D}_1$.

As for the combinators, the neighbourhood relations have to be worked out in terms of the indices. For example

$$X^0_n \text{ in}_0 \; Z_m \text{ iff either } m = 0 \text{ or for some } k$$

$$m = 2k + 1 \text{ and } X^0_n \subseteq X^0_k \; .$$

and

$$W_k \; \text{proj}^2_1 \; X^1_m \text{ iff } X^1_{q(k)} \subseteq X^1_m \; .$$

The reader needs to check that these are recursively enumerable

Relations in the indices. For this purpose it may be convenient to recall some closure properties of these relations: taking conjunctions, disjunctions, substituting recursive functions, applying an existential quantifier to the front. □

Products give us a way of providing an immediate meaning to the notion of a computable function of several variables. Note that the proof of 3.7 is "effective" and shows that substitution of computable functions of several variables into each other always gives computable functions. We turn next to the function spaces.

3.8.6 Theorem 7.5 — function space effective

Theorem_7_5.lean

```
module

public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Table_5_5
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_12

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

theorem funSpace_isEffectivelyGiven (h₀ : V₀.IsEffectivelyGiven) (h₁ : V₁.
    IsEffectivelyGiven) :
    (funSpace V₀ V₁).IsEffectivelyGiven := by
  obtain ⟨P₀⟩ := h₀
  obtain ⟨P₁⟩ := h₁
  obtain ⟨incl0, hincl0p, hincl0s⟩ := P₀.incl_computable
  obtain ⟨incl1, hincl1p, hincl1s⟩ := P₁.incl_computable
  obtain ⟨eq1, heq1p, heq1s⟩ := P₁.eq_computable
  obtain ⟨fc0, hfc0p, hfc0s⟩ := P₀.cons_computable
  obtain ⟨fc1, hfc1p, hfc1s⟩ := P₁.cons_computable
  exact ⟨funPresentation P₀ P₁ (funConsChar P₀ P₁ fc0 fc1) incl0 incl1 eq1
    (funConsChar_spec P₀ P₁ fc0 fc1 (fun s => (hfc0s s).symm) (fun s => (hfc1s s).symm)
    )
    (primrec_funConsChar P₀ P₁ fc0 fc1 hfc0p hfc1p)
    (fun s => (hincl0s s).symm) hincl0p
    (fun s => (hincl1s s).symm) hincl1p
    (fun s => (heq1s s).symm) heq1p⟩

theorem Xenum_singleton (gN : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P₀ P₁ (decodeList c))
      : Set (ApproximableMap V₀ V₁)).Nonempty) (j m : ℕ) :
    Xenum P₀ P₁ gN (Nat.pair (Nat.pair j m) 0 + 1) = step (P₀.X j) (P₁.X m) := by
  have hfp : funPair P₀ P₁ (Nat.pair j m) = (P₀.X j, P₁.X m) := by
    show (P₀.X (Nat.pair j m).unpair.1, P₁.X (Nat.pair j m).unpair.2) = (P₀.X j, P₁.X m
    )
    rw [unpair_pair_fst, unpair_pair_snd]
  have hdec : decodeList (Nat.pair (Nat.pair j m) 0 + 1) = [Nat.pair j m] := by
    rw [decodeList_succ, unpair_pair_fst, unpair_pair_snd, decodeList_zero]
  have hstepeq : (stepFun (funListOf P₀ P₁ [Nat.pair j m]) : Set (ApproximableMap V₀ V₁
    ))
      = step (P₀.X j) (P₁.X m) := by
    show stepFun [funPair P₀ P₁ (Nat.pair j m)] = step (P₀.X j) (P₁.X m)
    rw [hfp, stepFun_singleton]
  have hcons : gN (Nat.pair (Nat.pair j m) 0 + 1) = 1 := by
    rw [hgN, hdec, hstepeq]; exact (step_mem (P₀.mem_X j) (P₁.mem_X m)).2
  rw [Xenum_pos P₀ P₁ hcons, hdec, hstepeq]
```

```
section ConsChain

variable {V : NeighborhoodSystem α} (P : ComputablePresentation V)

theorem consChain_iff (js : List ℕ) :
    (∀ j ∈ js, P.X (idxchain P js) ⊆ P.X j) ↔ V.mem (interFrom P V.master js) := by
  constructor
  · intro hle
    have hsub : P.X (idxchain P js) ⊆ interFrom P V.master js := by
      intro z hz
      rw [mem_interFrom]
      exact ⟨V.sub_master (P.mem_X _) hz, fun j hj => hle j hj hz⟩
    exact interFrom_mem_of_witness P (P.mem_X _) hsub V.master_mem
  · intro hmem j hj
    rw [idxchain_spec P hmem]
    exact fun z hz => (mem_interFrom P |>.mp hz).2 j hj

end ConsChain

theorem evalMap_rel_prodNbhd_iff {F : Set (ApproximableMap V₀ V₁)} (hF : (funSpace V₀ V
    ₁).mem F)
    {X : Set α} (hX : V₀.mem X) {Y : Set β} (hY : V₁.mem Y) :
    (evalMap V₀ V₁).rel (prodNbhd F X) Y ↔ F ⊆ step X Y := by
  show (prod (funSpace V₀ V₁) V₀).mem (prodNbhd F X) ∧
    (eval V₀ V₁).rel (Sum.inl ^-1' prodNbhd F X) (Sum.inr ^-1' prodNbhd F X) Y ↔ _
  rw [inl_preimage_prodNbhd, inr_preimage_prodNbhd]
  constructor
  · rintro ⟨_, _, _, _, hrel⟩ f hf; exact mem_step.mpr (hrel f hf)
  · intro hsub
    exact ⟨prod_mem_prodNbhd hF hX, hF, hX, hY, fun f hf => mem_step.mp (hsub hf)⟩

theorem evalMap_isComputable (gN incl0 incl1 eq1 : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P₀ P₁ (decodeList c))
      : Set (ApproximableMap V₀ V₁))).Nonempty) (hgNp : Nat.Primrec gN)
    (hincl0 : ∀ s, incl0 s = 1 ↔ P₀.X s.unpair.1 ⊆ P₀.X s.unpair.2) (hincl0p : Nat.
    Primrec incl0)
    (hincl1 : ∀ s, incl1 s = 1 ↔ P₁.X s.unpair.1 ⊆ P₁.X s.unpair.2) (hincl1p : Nat.
    Primrec incl1)
    (heq1 : ∀ s, eq1 s = 1 ↔ P₁.X s.unpair.1 = P₁.X s.unpair.2) (heq1p : Nat.Primrec
    eq1) :
    ComputableMap
      (prodPresentation (funPresentation P₀ P₁ gN incl0 incl1 eq1 hgN hgNp hincl0
    hincl0p
        hincl1 hincl1p heq1 heq1p) P₀) P₁ (evalMap V₀ V₁) := by
  constructor

  have hsub : RecDecidable (fun s => Xenum P₀ P₁ gN s.unpair.1 ⊆ Xenum P₀ P₁ gN s.
    unpair.2) :=
    (funPresentation P₀ P₁ gN incl0 incl1 eq1 hgN hgNp hincl0 hincl0p
      hincl1 hincl1p heq1 heq1p).incl_computable

  have h11 : Nat.Primrec (fun t : ℕ => t.unpair.1.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.left
  have h12 : Nat.Primrec (fun t : ℕ => t.unpair.1.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.left
  have hg : Nat.Primrec (fun t => Nat.pair t.unpair.1.unpair.1
```

```
      (Nat.pair (Nat.pair t.unpair.1.unpair.2 t.unpair.2) 0 + 1)) :=
    h11.pair (Nat.Primrec.succ.comp ((h12.pair Nat.Primrec.right).pair (Nat.Primrec.
    const 0)))
  refine (RecDecidable.of_iff (fun t => ?_) (hsub.comp hg)).re
  simp only [unpair_pair_fst, unpair_pair_snd]
  rw [Xenum_singleton P₀ P₁ gN hgN t.unpair.1.unpair.2 t.unpair.2,
    show (prodPresentation (funPresentation P₀ P₁ gN incl0 incl1 eq1 hgN hgNp hincl0
    hincl0p
        hincl1 hincl1p heq1 heq1p) P₀).X t.unpair.1
      = prodNbhd (Xenum P₀ P₁ gN t.unpair.1.unpair.1) (P₀.X t.unpair.1.unpair.2) from
    rfl,
    evalMap_rel_prodNbhd_iff (Xenum_mem P₀ P₁ gN hgN _) (P₀.mem_X _) (P₁.mem_X _)]

theorem funListOf_append (la lb : List ℕ) :
    funListOf P₀ P₁ (la ++ lb) = funListOf P₀ P₁ la ++ funListOf P₀ P₁ lb := by
  simp [funListOf, List.map_append]

end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

theorem interList_subset_base {base : Set β} {M : List (Set β)} : interList base M ⊆
    base :=
  fun _ hz => (mem_interList.mp hz).1
end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

theorem mem_Xenum_iff (gN : ℕ → ℕ) (φ : (funSpace V₀ V₁).Element) (c : ℕ) :
    φ.mem (Xenum P₀ P₁ gN c) ↔
      (gN c = 1 → ∀ e ∈ decodeList c, φ.mem (step (P₀.X e.unpair.1) (P₁.X e.unpair.2))
    ) := by
  by_cases h : gN c = 1
  · rw [Xenum_pos P₀ P₁ h, mem_stepFun_iff φ (funListOf_valid P₀ P₁ (decodeList c))]
    constructor
    · intro hp _ e he
      exact hp (funPair P₀ P₁ e) (List.mem_map.mpr ⟨e, he, rfl⟩)
    · intro himp p hp
      rw [funListOf, List.mem_map] at hp
      obtain ⟨e, he, rfl⟩ := hp
      exact himp h e he
  · rw [Xenum_neg P₀ P₁ h]
    constructor
    · intro _ hcon; exact absurd hcon h
    · intro _; rw [← funSpace_master]; exact φ.master_mem

theorem Xenum_isComputableElement_iff (gN : ℕ → ℕ) (hgNp : Nat.Primrec gN)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P₀ P₁ (decodeList c))
      : Set (ApproximableMap V₀ V₁)).Nonempty) (φ : (funSpace V₀ V₁).Element) :
    REPred (fun c => φ.mem (Xenum P₀ P₁ gN c)) ↔ ComputableMap P₀ P₁ (toApproxMap φ) :=
    by
```

```
  have hbridge := mem_Xenum_iff P₀ P₁ gN φ
  constructor
  ·
    intro helem
    have hc0p : Nat.Primrec (fun s => Nat.pair s 0 + 1) :=
      Nat.Primrec.succ.comp (primrec_id.pair (Nat.Primrec.const 0))
    have key : REPred (fun s => φ.mem (Xenum P₀ P₁ gN (Nat.pair s 0 + 1))) := helem.
    comp hc0p
    constructor
    show REPred (fun s => φ.mem (step (P₀.X s.unpair.1) (P₁.X s.unpair.2)))
    refine REPred.of_iff (fun s => ?_) key
    have hdec : decodeList (Nat.pair s 0 + 1) = [s] := by
      rw [decodeList_succ, unpair_pair_fst, unpair_pair_snd, decodeList_zero]
    have hcons : gN (Nat.pair s 0 + 1) = 1 := by
      rw [hgN, hdec]
      show (stepFun [(P₀.X s.unpair.1, P₁.X s.unpair.2)]
        : Set (ApproximableMap V₀ V₁)).Nonempty
      rw [stepFun_singleton]
      exact (step_mem (P₀.mem_X _) (P₁.mem_X _)).2
    rw [hbridge (Nat.pair s 0 + 1), hdec]
    constructor
    · intro hRs _ e he; rw [List.mem_singleton] at he; subst he; exact hRs
    · intro h; exact h hcons s (List.mem_singleton.mpr rfl)
  ·
    intro hmap
    have hR' : REPred (fun s => φ.mem (step (P₀.X s.unpair.1) (P₁.X s.unpair.2))) :=
    hmap.out
    have hforall : REPred (fun c => ∀ e ∈ decodeList c,
        φ.mem (step (P₀.X e.unpair.1) (P₁.X e.unpair.2))) := hR'.forall_mem_decodeList
    have hne1 : REPred (fun c => ¬ gN c = 1) :=
      ((RecDecidable.natEq hgNp (Nat.Primrec.const 1)).not).re
    refine REPred.of_iff (fun c => ?_) (hne1.or hforall)
    rw [hbridge c]; exact Decidable.imp_iff_not_or

theorem isComputableElement_funPresentation_iff (gN incl0 incl1 eq1 : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P₀ P₁ (decodeList c))
      : Set (ApproximableMap V₀ V₁)).Nonempty) (hgNp : Nat.Primrec gN)
    (hincl0 : ∀ s, incl0 s = 1 ↔ P₀.X s.unpair.1 ⊆ P₀.X s.unpair.2) (hincl0p : Nat.
    Primrec incl0)
    (hincl1 : ∀ s, incl1 s = 1 ↔ P₁.X s.unpair.1 ⊆ P₁.X s.unpair.2) (hincl1p : Nat.
    Primrec incl1)
    (heq1 : ∀ s, eq1 s = 1 ↔ P₁.X s.unpair.1 = P₁.X s.unpair.2) (heq1p : Nat.Primrec
    eq1)
    (φ : (funSpace V₀ V₁).Element) :
    ComputableElement (funPresentation P₀ P₁ gN incl0 incl1 eq1 hgN hgNp hincl0 hincl0p
        hincl1 hincl1p heq1 heq1p) φ ↔ ComputableMap P₀ P₁ (toApproxMap φ) :=
  ⟨fun h => (Xenum_isComputableElement_iff P₀ P₁ gN hgNp hgN φ).mp h.out,
    fun h => ⟨(Xenum_isComputableElement_iff P₀ P₁ gN hgNp hgN φ).mpr h⟩⟩

theorem mem_Xenum_iff_map (gN : ℕ → ℕ) (f : ApproximableMap V₀ V₁) (c : ℕ) :
    f ∈ Xenum P₀ P₁ gN c ↔
      (gN c = 1 → ∀ e ∈ decodeList c, f.rel (P₀.X e.unpair.1) (P₁.X e.unpair.2)) := by
  by_cases h : gN c = 1
  · rw [Xenum_pos P₀ P₁ h, mem_stepFun]
    constructor
```

```
    · intro hp _ e he
      exact hp (funPair P₀ P₁ e) (List.mem_map.mpr ⟨e, he, rfl⟩)
    · intro himp p hp
      rw [funListOf, List.mem_map] at hp
      obtain ⟨e, he, rfl⟩ := hp
      exact himp h e he
  · rw [Xenum_neg P₀ P₁ h]
    constructor
    · intro _ hcon; exact absurd hcon h
    · intro _; exact Set.mem_univ f

theorem curry_rel_Xenum_iff {V₂ : NeighborhoodSystem ?} (P₂ : ComputablePresentation V₂
    )
    (gN : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P₁ P₂ (decodeList c))
      : Set (ApproximableMap V₁ V₂)).Nonempty)
    (g : ApproximableMap (prod V₀ V₁) V₂) (n c : ℕ) :
    (curry g).rel (P₀.X n) (Xenum P₁ P₂ gN c) ↔
      (gN c = 1 → ∀ e ∈ decodeList c,
        g.rel (prodNbhd (P₀.X n) (P₁.X e.unpair.1)) (P₂.X e.unpair.2)) := by
  rw [curry_rel]
  constructor
  · rintro ⟨hX, _, hmem⟩
    rw [mem_Xenum_iff_map P₁ P₂ gN (gSection g hX) c] at hmem
    intro hc e he
    have hrel := hmem hc e he
    rwa [gSection_rel] at hrel
  · intro himp
    refine ⟨P₀.mem_X n, Xenum_mem P₁ P₂ gN hgN c, ?_⟩
    rw [mem_Xenum_iff_map P₁ P₂ gN (gSection g (P₀.mem_X n)) c]
    intro hc e he
    rw [gSection_rel]
    exact himp hc e he

theorem curry_isComputable {V₂ : NeighborhoodSystem ?} (P₂ : ComputablePresentation V₂)
    (gN incl0 incl1 eq1 : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P₁ P₂ (decodeList c))
      : Set (ApproximableMap V₁ V₂)).Nonempty) (hgNp : Nat.Primrec gN)
    (hincl0 : ∀ s, incl0 s = 1 ↔ P₁.X s.unpair.1 ⊆ P₁.X s.unpair.2) (hincl0p : Nat.
    Primrec incl0)
    (hincl1 : ∀ s, incl1 s = 1 ↔ P₂.X s.unpair.1 ⊆ P₂.X s.unpair.2) (hincl1p : Nat.
    Primrec incl1)
    (heq1 : ∀ s, eq1 s = 1 ↔ P₂.X s.unpair.1 = P₂.X s.unpair.2) (heq1p : Nat.Primrec
    eq1)
    {g : ApproximableMap (prod V₀ V₁) V₂}
    (hg : ComputableMap (prodPresentation P₀ P₁) P₂ g) :
    ComputableMap P₀ (funPresentation P₁ P₂ gN incl0 incl1 eq1 hgN hgNp hincl0 hincl0p
      hincl1 hincl1p heq1 heq1p) (curry g) := by
  constructor
  have hg' : REPred (fun s => g.rel ((prodPresentation P₀ P₁).X s.unpair.1) (P₂.X s.
    unpair.2)) := hg.out
  have hre : Nat.Primrec (fun s => Nat.pair (Nat.pair s.unpair.1 s.unpair.2.unpair.1)
      s.unpair.2.unpair.2) :=
    (Nat.Primrec.left.pair (Nat.Primrec.left.comp Nat.Primrec.right)).pair
      (Nat.Primrec.right.comp Nat.Primrec.right)
```

```
  have hS : REPred₂ (fun n e =>
      g.rel (prodNbhd (P₀.X n) (P₁.X e.unpair.1)) (P₂.X e.unpair.2)) := by
    refine REPred.of_iff (fun s => ?_) (hg'.comp hre)
    simp only [prodPresentation_X, unpair_pair_fst, unpair_pair_snd]

  have hforall : REPred (fun t => ∀ e ∈ decodeList t.unpair.2,
      g.rel (prodNbhd (P₀.X t.unpair.1) (P₁.X e.unpair.1)) (P₂.X e.unpair.2)) :=
    REPred.forall_mem_decodeList₂ hS
  have hne1 : REPred (fun t => ¬ gN t.unpair.2 = 1) :=
    ((RecDecidable.natEq (hgNp.comp Nat.Primrec.right) (Nat.Primrec.const 1)).not).re
  refine REPred.of_iff (fun t => ?_) (hne1.or hforall)
  show (curry g).rel (P₀.X t.unpair.1) (Xenum P₁ P₂ gN t.unpair.2) ↔ _
  rw [curry_rel_Xenum_iff P₀ P₁ P₂ gN hgN g t.unpair.1 t.unpair.2]
  exact Decidable.imp_iff_not_or

end

section
set_option linter.unusedVariables false

theorem theorem_75.{u_1, u_2, u_3} : And
  (And
    (And
      (And
        (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
          {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
          (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
          (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁) (gN :
    Nat → Nat),
          Nat.Primrec gN →
            (∀ (c : Nat),
              Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
    nat_lit 1))))
                (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
     β V₀ V₁)
                  (@DomainTheory.NeighbourhoodSystems.stepFun α β V₀ V₁
                    (@DomainTheory.NeighbourhoodSystems.funListOf α β V₀ V₁ P₀ P₁
                      (Domain.Recursive.decodeList c))))) →
              ∀
                (φ :
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
                    (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)),
                Iff
                  (Domain.Recursive.REPred fun (c : Nat) =>
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
                      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
                      (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) φ
                      (@DomainTheory.NeighbourhoodSystems.Xenum α β V₀ V₁ P₀ P₁ gN c))
                  (@DomainTheory.NeighbourhoodSystems.ComputableMap α β V₀ V₁ P₀ P₁
                    (@DomainTheory.NeighbourhoodSystems.toApproxMap α β V₀ V₁ φ)))
        (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
          {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
```

```
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V₀
 →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven β
 V₁ →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
            (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)))
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
    (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
    (P₂ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation ? V₂) (gN incl0
 incl1 eq1 : Nat → Nat)
    (hgN :
      ∀ (c : Nat),
        Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit
1))))
          (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁
 V₂)
            (@DomainTheory.NeighbourhoodSystems.stepFun β ? V₁ V₂
              (@DomainTheory.NeighbourhoodSystems.funListOf β ? V₁ V₂ P₁ P₂ (Domain
.Recursive.decodeList c)))))
    (hgNp : Nat.Primrec gN)
    (hincl0 :
      ∀ (s : Nat),
        Iff (@Eq Nat (incl0 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
nat_lit 1))))
          (@LE.le (Set β) (@Set.instLE β)
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
@Prod.fst Nat Nat (Nat.unpair s)))
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁
              (@Prod.snd Nat Nat (Nat.unpair s)))))
    (hincl0p : Nat.Primrec incl0)
    (hincl1 :
      ∀ (s : Nat),
        Iff (@Eq Nat (incl1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
nat_lit 1))))
          (@LE.le (Set ?) (@Set.instLE ?)
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂ (
@Prod.fst Nat Nat (Nat.unpair s)))
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂
              (@Prod.snd Nat Nat (Nat.unpair s)))))
    (hincl1p : Nat.Primrec incl1)
    (heq1 :
      ∀ (s : Nat),
        Iff (@Eq Nat (eq1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit
1))))
          (@Eq (Set ?)
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂ (
@Prod.fst Nat Nat (Nat.unpair s)))
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂
              (@Prod.snd Nat Nat (Nat.unpair s)))))
    (heq1p : Nat.Primrec eq1)
    {g :
```

```
      @DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂},
    @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α β) ?
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂
        (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁) P₂ g
→
      @DomainTheory.NeighbourhoodSystems.ComputableMap α
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂) P₀
        (@DomainTheory.NeighbourhoodSystems.funPresentation β ? V₁ V₂ P₁ P₂ gN
incl0 incl1 eq1 hgN hgNp hincl0
          hincl0p hincl1 hincl1p heq1 heq1p)
        (@DomainTheory.NeighbourhoodSystems.curry α β ? V₀ V₁ V₂ g)))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁) (gN incl0
incl1 eq1 : Nat → Nat)
  (hgN :
    ∀ (c : Nat),
      Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))
))
        (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V
₁)
          (@DomainTheory.NeighbourhoodSystems.stepFun α β V₀ V₁
            (@DomainTheory.NeighbourhoodSystems.funListOf α β V₀ V₁ P₀ P₁ (Domain.
Recursive.decodeList c)))))
  (hgNp : Nat.Primrec gN)
  (hincl0 :
    ∀ (s : Nat),
      Iff (@Eq Nat (incl0 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit
1))))
        (@LE.le (Set α) (@Set.instLE α)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V₀ P₀ (
@Prod.fst Nat Nat (Nat.unpair s)))
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V₀ P₀ (
@Prod.snd Nat Nat (Nat.unpair s)))))
  (hincl0p : Nat.Primrec incl0)
  (hincl1 :
    ∀ (s : Nat),
      Iff (@Eq Nat (incl1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit
1))))
        (@LE.le (Set β) (@Set.instLE β)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
@Prod.fst Nat Nat (Nat.unpair s)))
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
@Prod.snd Nat Nat (Nat.unpair s)))))
  (hincl1p : Nat.Primrec incl1)
  (heq1 :
    ∀ (s : Nat),
      Iff (@Eq Nat (eq1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)
)))
        (@Eq (Set β)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
@Prod.fst Nat Nat (Nat.unpair s)))
```

```
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
 @Prod.snd Nat Nat (Nat.unpair s)))))
   (heq1p : Nat.Primrec eq1),
   @DomainTheory.NeighbourhoodSystems.ComputableMap
     (Sum (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁) α) β
     (@DomainTheory.NeighbourhoodSystems.prod (@DomainTheory.NeighbourhoodSystems.
 ApproximableMap α β V₀ V₁) α
       (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) V₀)
     V₁
     (@DomainTheory.NeighbourhoodSystems.prodPresentation
       (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁) α
       (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) V₀
       (@DomainTheory.NeighbourhoodSystems.funPresentation α β V₀ V₁ P₀ P₁ gN incl0
 incl1 eq1 hgN hgNp hincl0 hincl0p
         hincl1 hincl1p heq1 heq1p)
       P₀)
     P₁ (@DomainTheory.NeighbourhoodSystems.evalMap α β V₀ V₁)))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
 {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
 (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)

 (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁) (gN incl0
 incl1 eq1 : Nat → Nat)
 (hgN :
   ∀ (c : Nat),
     Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
       (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
         (@DomainTheory.NeighbourhoodSystems.stepFun α β V₀ V₁
           (@DomainTheory.NeighbourhoodSystems.funListOf α β V₀ V₁ P₀ P₁ (Domain.
 Recursive.decodeList c)))))
 (hgNp : Nat.Primrec gN)
 (hincl0 :
   ∀ (s : Nat),
     Iff (@Eq Nat (incl0 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)
 )))
       (@LE.le (Set α) (@Set.instLE α)
         (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V₀ P₀ (@Prod
 .fst Nat Nat (Nat.unpair s)))
         (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V₀ P₀ (@Prod
 .snd Nat Nat (Nat.unpair s)))))
 (hincl0p : Nat.Primrec incl0)
 (hincl1 :
   ∀ (s : Nat),
     Iff (@Eq Nat (incl1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)
 )))
       (@LE.le (Set β) (@Set.instLE β)
         (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (@Prod
 .fst Nat Nat (Nat.unpair s)))
         (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (@Prod
 .snd Nat Nat (Nat.unpair s)))))
 (hincl1p : Nat.Primrec incl1)
 (heq1 :
   ∀ (s : Nat),
     Iff (@Eq Nat (eq1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
 )
```

```
       (@Eq (Set β)
         (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (@Prod
  .fst Nat Nat (Nat.unpair s)))
         (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (@Prod
  .snd Nat Nat (Nat.unpair s)))))
  (heq1p : Nat.Primrec eq1)
  (φ :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
      (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)),
  Iff
    (@DomainTheory.NeighbourhoodSystems.ComputableElement
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
      (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)
      (@DomainTheory.NeighbourhoodSystems.funPresentation α β V₀ V₁ P₀ P₁ gN incl0
  incl1 eq1 hgN hgNp hincl0 hincl0p
       hincl1 hincl1p heq1 heq1p)
      φ)
    (@DomainTheory.NeighbourhoodSystems.ComputableMap α β V₀ V₁ P₀ P₁
      (@DomainTheory.NeighbourhoodSystems.toApproxMap α β V₀ V₁ φ))) :=
@And.intro
(And
  (And
    (And
      (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
       {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
       (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
       (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁) (gN :
  Nat → Nat),
       Nat.Primrec gN →
         (∀ (c : Nat),
            Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
  nat_lit 1))))
              (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
   β V₀ V₁)
                (@DomainTheory.NeighbourhoodSystems.stepFun α β V₀ V₁
                  (@DomainTheory.NeighbourhoodSystems.funListOf α β V₀ V₁ P₀ P₁
                    (Domain.Recursive.decodeList c))))) →
          ∀
            (φ :
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
                (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)),
            Iff
              (Domain.Recursive.REPred fun (c : Nat) =>
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
                  (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) φ
                  (@DomainTheory.NeighbourhoodSystems.Xenum α β V₀ V₁ P₀ P₁ gN c))
              (@DomainTheory.NeighbourhoodSystems.ComputableMap α β V₀ V₁ P₀ P₁
                (@DomainTheory.NeighbourhoodSystems.toApproxMap α β V₀ V₁ φ)))
    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
       {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V₀
```

```
→
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven β
V₁ →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
            (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)))
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
    (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
    (P₂ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation ? V₂) (gN incl0
 incl1 eq1 : Nat → Nat)
    (hgN :
      ∀ (c : Nat),
        Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit
1))))
          (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁
 V₂)
            (@DomainTheory.NeighbourhoodSystems.stepFun β ? V₁ V₂
              (@DomainTheory.NeighbourhoodSystems.funListOf β ? V₁ V₂ P₁ P₂ (Domain
.Recursive.decodeList c)))))
    (hgNp : Nat.Primrec gN)
    (hincl0 :
      ∀ (s : Nat),
        Iff (@Eq Nat (incl0 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
nat_lit 1))))
          (@LE.le (Set β) (@Set.instLE β)
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
@Prod.fst Nat Nat (Nat.unpair s)))
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁
              (@Prod.snd Nat Nat (Nat.unpair s)))))
    (hincl0p : Nat.Primrec incl0)
    (hincl1 :
      ∀ (s : Nat),
        Iff (@Eq Nat (incl1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
nat_lit 1))))
          (@LE.le (Set ?) (@Set.instLE ?)
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂ (
@Prod.fst Nat Nat (Nat.unpair s)))
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂
              (@Prod.snd Nat Nat (Nat.unpair s)))))
    (hincl1p : Nat.Primrec incl1)
    (heq1 :
      ∀ (s : Nat),
        Iff (@Eq Nat (eq1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit
1))))
          (@Eq (Set ?)
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂ (
@Prod.fst Nat Nat (Nat.unpair s)))
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂
              (@Prod.snd Nat Nat (Nat.unpair s)))))
    (heq1p : Nat.Primrec eq1)
    {g :
      @DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
```

```
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂},
    @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α β) ?
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂
        (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁) P₂ g
→
      @DomainTheory.NeighbourhoodSystems.ComputableMap α
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂) P₀
        (@DomainTheory.NeighbourhoodSystems.funPresentation β ? V₁ V₂ P₁ P₂ gN
incl0 incl1 eq1 hgN hgNp hincl0
          hincl0p hincl1 hincl1p heq1 heq1p)
        (@DomainTheory.NeighbourhoodSystems.curry α β ? V₀ V₁ V₂ g)))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁) (gN incl0
incl1 eq1 : Nat → Nat)
  (hgN :
    ∀ (c : Nat),
      Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))
))
        (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V
₁)
          (@DomainTheory.NeighbourhoodSystems.stepFun α β V₀ V₁
            (@DomainTheory.NeighbourhoodSystems.funListOf α β V₀ V₁ P₀ P₁ (Domain.
Recursive.decodeList c)))))
  (hgNp : Nat.Primrec gN)
  (hincl0 :
    ∀ (s : Nat),
      Iff (@Eq Nat (incl0 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit
1))))
        (@LE.le (Set α) (@Set.instLE α)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V₀ P₀ (
@Prod.fst Nat Nat (Nat.unpair s)))
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V₀ P₀ (
@Prod.snd Nat Nat (Nat.unpair s)))))
  (hincl0p : Nat.Primrec incl0)
  (hincl1 :
    ∀ (s : Nat),
      Iff (@Eq Nat (incl1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit
1))))
        (@LE.le (Set β) (@Set.instLE β)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
@Prod.fst Nat Nat (Nat.unpair s)))
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
@Prod.snd Nat Nat (Nat.unpair s)))))
  (hincl1p : Nat.Primrec incl1)
  (heq1 :
    ∀ (s : Nat),
      Iff (@Eq Nat (eq1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)
)))
        (@Eq (Set β)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
@Prod.fst Nat Nat (Nat.unpair s)))
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
```

```
  @Prod.snd Nat Nat (Nat.unpair s)))))
     (heq1p : Nat.Primrec eq1),
     @DomainTheory.NeighbourhoodSystems.ComputableMap
       (Sum (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁) α) β
       (@DomainTheory.NeighbourhoodSystems.prod (@DomainTheory.NeighbourhoodSystems.
  ApproximableMap α β V₀ V₁) α
         (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) V₀)
       V₁
       (@DomainTheory.NeighbourhoodSystems.prodPresentation
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁) α
         (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) V₀
         (@DomainTheory.NeighbourhoodSystems.funPresentation α β V₀ V₁ P₀ P₁ gN incl0
  incl1 eq1 hgN hgNp hincl0 hincl0p
           hincl1 hincl1p heq1 heq1p)
         P₀)
       P₁ (@DomainTheory.NeighbourhoodSystems.evalMap α β V₀ V₁)))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁) (gN incl0
  incl1 eq1 : Nat → Nat)
  (hgN :
    ∀ (c : Nat),
      Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
        (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
          (@DomainTheory.NeighbourhoodSystems.stepFun α β V₀ V₁
            (@DomainTheory.NeighbourhoodSystems.funListOf α β V₀ V₁ P₀ P₁ (Domain.
  Recursive.decodeList c)))))
  (hgNp : Nat.Primrec gN)
  (hincl0 :
    ∀ (s : Nat),
      Iff (@Eq Nat (incl0 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)
  )))
        (@LE.le (Set α) (@Set.instLE α)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V₀ P₀ (@Prod
  .fst Nat Nat (Nat.unpair s)))
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V₀ P₀ (@Prod
  .snd Nat Nat (Nat.unpair s)))))
  (hincl0p : Nat.Primrec incl0)
  (hincl1 :
    ∀ (s : Nat),
      Iff (@Eq Nat (incl1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)
  )))
        (@LE.le (Set β) (@Set.instLE β)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (@Prod
  .fst Nat Nat (Nat.unpair s)))
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (@Prod
  .snd Nat Nat (Nat.unpair s)))))
  (hincl1p : Nat.Primrec incl1)
  (heq1 :
    ∀ (s : Nat),
      Iff (@Eq Nat (eq1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
  )
        (@Eq (Set β)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (@Prod
```

```
  .fst Nat Nat (Nat.unpair s)))
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (@Prod
  .snd Nat Nat (Nat.unpair s)))))
  (heq1p : Nat.Primrec eq1)
  (φ :
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
      (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)),
  Iff
    (@DomainTheory.NeighbourhoodSystems.ComputableElement
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
      (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)
      (@DomainTheory.NeighbourhoodSystems.funPresentation α β V₀ V₁ P₀ P₁ gN incl0
  incl1 eq1 hgN hgNp hincl0 hincl0p
        hincl1 hincl1p heq1 heq1p)
      φ)
    (@DomainTheory.NeighbourhoodSystems.ComputableMap α β V₀ V₁ P₀ P₁
      (@DomainTheory.NeighbourhoodSystems.toApproxMap α β V₀ V₁ φ)))
(@And.intro
  (And
    (And
      (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
        {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
        (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
        (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁) (gN :
  Nat → Nat),
        Nat.Primrec gN →
          (∀ (c : Nat),
              Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
  nat_lit 1))))
                (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
   β V₀ V₁)
                  (@DomainTheory.NeighbourhoodSystems.stepFun α β V₀ V₁
                    (@DomainTheory.NeighbourhoodSystems.funListOf α β V₀ V₁ P₀ P₁
                      (Domain.Recursive.decodeList c))))) →
            ∀
              (φ :
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
                  (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)),
              Iff
                (Domain.Recursive.REPred fun (c : Nat) =>
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
                    (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) φ
                    (@DomainTheory.NeighbourhoodSystems.Xenum α β V₀ V₁ P₀ P₁ gN c))
                (@DomainTheory.NeighbourhoodSystems.ComputableMap α β V₀ V₁ P₀ P₁
                  (@DomainTheory.NeighbourhoodSystems.toApproxMap α β V₀ V₁ φ)))
      (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
        {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V₀
   →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven β
   V₁ →
```

```
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
            (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)))
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
    (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
    (P₂ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation ? V₂) (gN incl0
 incl1 eq1 : Nat → Nat)
    (hgN :
      ∀ (c : Nat),
        Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit
1))))
          (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁
 V₂)
            (@DomainTheory.NeighbourhoodSystems.stepFun β ? V₁ V₂
              (@DomainTheory.NeighbourhoodSystems.funListOf β ? V₁ V₂ P₁ P₂ (Domain
.Recursive.decodeList c)))))
    (hgNp : Nat.Primrec gN)
    (hincl0 :
      ∀ (s : Nat),
        Iff (@Eq Nat (incl0 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
nat_lit 1))))
          (@LE.le (Set β) (@Set.instLE β)
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
@Prod.fst Nat Nat (Nat.unpair s)))
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁
              (@Prod.snd Nat Nat (Nat.unpair s)))))
    (hincl0p : Nat.Primrec incl0)
    (hincl1 :
      ∀ (s : Nat),
        Iff (@Eq Nat (incl1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
nat_lit 1))))
          (@LE.le (Set ?) (@Set.instLE ?)
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂ (
@Prod.fst Nat Nat (Nat.unpair s)))
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂
              (@Prod.snd Nat Nat (Nat.unpair s)))))
    (hincl1p : Nat.Primrec incl1)
    (heq1 :
      ∀ (s : Nat),
        Iff (@Eq Nat (eq1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit
1))))
          (@Eq (Set ?)
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂ (
@Prod.fst Nat Nat (Nat.unpair s)))
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂
              (@Prod.snd Nat Nat (Nat.unpair s)))))
    (heq1p : Nat.Primrec eq1)
    {g :
      @DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂},
    @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α β) ?
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂
```

```
        (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁) P₂ g
→
      @DomainTheory.NeighbourhoodSystems.ComputableMap α
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂) P₀
        (@DomainTheory.NeighbourhoodSystems.funPresentation β ? V₁ V₂ P₁ P₂ gN
incl0 incl1 eq1 hgN hgNp hincl0
          hincl0p hincl1 hincl1p heq1 heq1p)
        (@DomainTheory.NeighbourhoodSystems.curry α β ? V₀ V₁ V₂ g)))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁) (gN incl0
incl1 eq1 : Nat → Nat)
  (hgN :
    ∀ (c : Nat),
      Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))
))
        (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V
1)
          (@DomainTheory.NeighbourhoodSystems.stepFun α β V₀ V₁
            (@DomainTheory.NeighbourhoodSystems.funListOf α β V₀ V₁ P₀ P₁ (Domain.
Recursive.decodeList c)))))
  (hgNp : Nat.Primrec gN)
  (hincl0 :
    ∀ (s : Nat),
      Iff (@Eq Nat (incl0 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit
1))))
        (@LE.le (Set α) (@Set.instLE α)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V₀ P₀ (
@Prod.fst Nat Nat (Nat.unpair s)))
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V₀ P₀ (
@Prod.snd Nat Nat (Nat.unpair s)))))
  (hincl0p : Nat.Primrec incl0)
  (hincl1 :
    ∀ (s : Nat),
      Iff (@Eq Nat (incl1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit
1))))
        (@LE.le (Set β) (@Set.instLE β)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
@Prod.fst Nat Nat (Nat.unpair s)))
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
@Prod.snd Nat Nat (Nat.unpair s)))))
  (hincl1p : Nat.Primrec incl1)
  (heq1 :
    ∀ (s : Nat),
      Iff (@Eq Nat (eq1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)
)))
        (@Eq (Set β)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
@Prod.fst Nat Nat (Nat.unpair s)))
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
@Prod.snd Nat Nat (Nat.unpair s)))))
  (heq1p : Nat.Primrec eq1),
  @DomainTheory.NeighbourhoodSystems.ComputableMap
```

```
    (Sum (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁) α) β
    (@DomainTheory.NeighbourhoodSystems.prod (@DomainTheory.NeighbourhoodSystems.
ApproximableMap α β V₀ V₁) α
      (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) V₀)
    V₁
    (@DomainTheory.NeighbourhoodSystems.prodPresentation
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁) α
      (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) V₀
      (@DomainTheory.NeighbourhoodSystems.funPresentation α β V₀ V₁ P₀ P₁ gN incl0
incl1 eq1 hgN hgNp hincl0 hincl0p
        hincl1 hincl1p heq1 heq1p)
      P₀)
    P₁ (@DomainTheory.NeighbourhoodSystems.evalMap α β V₀ V₁))
(@And.intro
  (And
    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
      (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁) (gN :
Nat → Nat),
      Nat.Primrec gN →
        (∀ (c : Nat),
            Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
nat_lit 1))))
              (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
 β V₀ V₁)
                (@DomainTheory.NeighbourhoodSystems.stepFun α β V₀ V₁
                  (@DomainTheory.NeighbourhoodSystems.funListOf α β V₀ V₁ P₀ P₁
                    (Domain.Recursive.decodeList c))))) →
          ∀
            (φ :
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
                (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)),
            Iff
              (Domain.Recursive.REPred fun (c : Nat) =>
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
                  (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) φ
                  (@DomainTheory.NeighbourhoodSystems.Xenum α β V₀ V₁ P₀ P₁ gN c))
              (@DomainTheory.NeighbourhoodSystems.ComputableMap α β V₀ V₁ P₀ P₁
                (@DomainTheory.NeighbourhoodSystems.toApproxMap α β V₀ V₁ φ)))
    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V₀
 →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven β
 V₁ →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
            (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)))
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
```

```
    (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
    (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
    (P₂ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation ? V₂) (gN incl0
 incl1 eq1 : Nat → Nat)
    (hgN :
      ∀ (c : Nat),
        Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit
1))))
          (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁
 V₂)
            (@DomainTheory.NeighbourhoodSystems.stepFun β ? V₁ V₂
              (@DomainTheory.NeighbourhoodSystems.funListOf β ? V₁ V₂ P₁ P₂ (Domain
.Recursive.decodeList c)))))
    (hgNp : Nat.Primrec gN)
    (hincl0 :
      ∀ (s : Nat),
        Iff (@Eq Nat (incl0 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
nat_lit 1))))
          (@LE.le (Set β) (@Set.instLE β)
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁ (
@Prod.fst Nat Nat (Nat.unpair s)))
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β V₁ P₁
              (@Prod.snd Nat Nat (Nat.unpair s)))))
    (hincl0p : Nat.Primrec incl0)
    (hincl1 :
      ∀ (s : Nat),
        Iff (@Eq Nat (incl1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
nat_lit 1))))
          (@LE.le (Set ?) (@Set.instLE ?)


            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂ (
@Prod.fst Nat Nat (Nat.unpair s)))
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂
              (@Prod.snd Nat Nat (Nat.unpair s)))))
    (hincl1p : Nat.Primrec incl1)
    (heq1 :
      ∀ (s : Nat),
        Iff (@Eq Nat (eq1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit
1))))
          (@Eq (Set ?)
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂ (
@Prod.fst Nat Nat (Nat.unpair s)))
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X ? V₂ P₂
              (@Prod.snd Nat Nat (Nat.unpair s)))))
    (heq1p : Nat.Primrec eq1)
    {g :
      @DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂},
    @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α β) ?
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂
        (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁) P₂ g
→
      @DomainTheory.NeighbourhoodSystems.ComputableMap α
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂) P₀
```

```
          (@DomainTheory.NeighbourhoodSystems.funPresentation β ? V₁ V₂ P₁ P₂ gN
    incl0 incl1 eq1 hgN hgNp hincl0
            hincl0p hincl1 hincl1p heq1 heq1p)
          (@DomainTheory.NeighbourhoodSystems.curry α β ? V₀ V₁ V₂ g))
      (@And.intro
        (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
          {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
          (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
          (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁) (gN :
    Nat → Nat),
          Nat.Primrec gN →
            (∀ (c : Nat),
              Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
    nat_lit 1))))
                (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
     β V₀ V₁)
                  (@DomainTheory.NeighbourhoodSystems.stepFun α β V₀ V₁
                    (@DomainTheory.NeighbourhoodSystems.funListOf α β V₀ V₁ P₀ P₁
                      (Domain.Recursive.decodeList c))))) →
              ∀
                (φ :
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
                    (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁)),
                Iff
                  (Domain.Recursive.REPred fun (c : Nat) =>
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
                      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
                      (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁) φ
                      (@DomainTheory.NeighbourhoodSystems.Xenum α β V₀ V₁ P₀ P₁ gN c))
                  (@DomainTheory.NeighbourhoodSystems.ComputableMap α β V₀ V₁ P₀ P₁
                    (@DomainTheory.NeighbourhoodSystems.toApproxMap α β V₀ V₁ φ)))
        (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
          {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V₀
     →
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven β
     V₁ →
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V₀ V₁)
                (@DomainTheory.NeighbourhoodSystems.funSpace α β V₀ V₁))
          @DomainTheory.NeighbourhoodSystems.Xenum_isComputableElement_iff
          @DomainTheory.NeighbourhoodSystems.funSpace_isEffectivelyGiven)
        @DomainTheory.NeighbourhoodSystems.curry_isComputable)
      @DomainTheory.NeighbourhoodSystems.evalMap_isComputable)
    @DomainTheory.NeighbourhoodSystems.isComputableElement_funPresentation_iff
end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  {V₂ : NeighborhoodSystem ?}

def curryStepCode (a e' : ℕ) : ℕ :=
```

```
  Nat.pair (Nat.pair (Nat.pair a e'.unpair.1) e'.unpair.2) 0 + 1

theorem curryIso_apply (x : (funSpace (prod V₀ V₁) V₂).Element) :
    curryIso V₀ V₁ V₂ x = toFilter (curry (toApproxMap x)) := rfl

theorem primrec_curryStepCode {a e : ℕ → ℕ} (ha : Nat.Primrec a) (he : Nat.Primrec e)
    :
    Nat.Primrec (fun w => curryStepCode (a w) (e w)) := by
  have h1 : Nat.Primrec (fun w => (e w).unpair.1) := Nat.Primrec.left.comp he
  have h2 : Nat.Primrec (fun w => (e w).unpair.2) := Nat.Primrec.right.comp he
  refine (Nat.Primrec.succ.comp (((ha.pair h1).pair h2).pair (Nat.Primrec.const 0))).
    of_eq
    (fun w => ?_)
  rfl

end
end DomainTheory.NeighbourhoodSystems
end
```

THEOREM 7.5. If $\mathcal{D}_0$ and $\mathcal{D}_1$ are effectively given, then so is $(\mathcal{D}_0 \to \mathcal{D}_1)$. The combinators eval and curry are computable, provided all the domains involved are effectively given. The computable elements $f \in |\mathcal{D}_0 \to \mathcal{D}_1|$ are exactly the computable maps $f : \mathcal{D}_0 \to \mathcal{D}_1$.

Proof: The proofs of 3.9, 3.11, and 3.12 were set up with this theorem in mind. If

$$\mathcal{D}_0 = \{X_n \mid n \in \mathbf{N}\} \quad \text{and} \quad \mathcal{D}_1 = \{Y_m \mid m \in \mathbf{N}\}$$

are two effectively given neighbourhood systems, then the neighbourhoods of $(\mathcal{D}_0 \to \mathcal{D}_1)$, by Definition 3.8, are non-empty intersections like

$$\bigcap_{i<q} [X_{n_i}, Y_{m_i}],$$

where $\langle n_0, n_1, \ldots, n_{q-1}\rangle$ and $\langle m_0, m_1, \ldots, m_{q-1}\rangle$ are two finite sequences of integers determining the choice of the function-space neighbourhood. In 3.9(i) the test for nonemptiness is given. Assuming the decidability of relations in $\mathcal{D}_0$ and $\mathcal{D}_1$, one remarks that the consistency of *finite sequences* of neighbourhoods is also decidable. (Hint: Test the first *two*, then form their intersection. Next test the third given neighbourhood against this one set; if consistent, form the intersection, and carry on.) By 3.9(i) at most $2 \cdot 2^q$ such sequential checks must be carried out to determine whether the function-space neighbourhood is non empty.

It may not be fun, but the checks can be carried out in finite time. Owing to this decidability, we can therefore enumerate in a systematic way *all* the pairs of finite sequences $\langle n_0, \ldots\rangle$ and $\langle m_0, \ldots\rangle$ that determine neighbourhoods: that is the way that $(\mathcal{D}_0 \to \mathcal{D}_1)$ obtains its enumeration.

Concerning the decidability of the required relations on $(\mathcal{D}_0 \to \mathcal{D}_1)$, we remark first off that consistency is more of the same: to test two finite intersections against each other, just form one big intersection and test it for non-emptiness as before. Secondly, the testing for intersection comes down in the end to testing one typical intersection of $[X, Y]$-neighbourhoods for equality with another. But equality amounts to two inclusions; inclusion in an intersection amounts to inclusion in each term. Therefore, what we need to do is to check a finite number of statements of the form:

$$\bigcap_{i<q} [X_{n_i}, Y_{m_i}] \subseteq [X_k, Y_\ell].$$

As we pointed out after the proof of 3.9, this inclusion is equivalent to

$$\bigcap\{Y_{m_i} \mid X_k \subseteq X_{n_i}\} \subseteq Y_\ell.$$

By decidability in $\mathcal{D}_0$, we can effectively find the n_i that are needed. Then in $\mathcal{D}_1$, we form the intersection of the corresponding Y_{m_i}. Finally, we check the inclusion. Again, one check in $(\mathcal{D}_0 \to \mathcal{D}_1)$ requires a whole sequence of checks in $\mathcal{D}_0$ and in $\mathcal{D}_1$, but the process is finite. So we have argued that $(\mathcal{D}_0 \to \mathcal{D}_1)$ is effectively given.

In showing that the combinators are computable, we refer first to the proof of 3.11. The typical pair of neighbourhoods possibly belonging to eval is

$$\bigcap_{i<q}[X_{n_i}, Y_{m_i}],\ X_k \text{ eval } Y_\ell.$$

As we needed not to be so specific, we expressed the holding of this relationship in terms of *all* the functions in the function-

space neighbourhood. But we know that the neighbourhood, by 3.9(ii), has a minimal element; it is then sufficient to test for the holding of $X_k f_0 Y_\ell$ at this minimal function f_0. But this test, we have already seen, is decidable. So the pairs in eval actually form a recursive set, not just a recursively enumerable set; thus, eval is a computable function.

The case of curry involves three domains and is a bit more messy. But again, if the required neighbourhoods are written out in full, it will be seen that curry, too, is computable. We leave this minor struggle to the exercises.

The final statement is an easy consequence of the fundamental connection between approximable $f : \mathcal{D}_0 \to \mathcal{D}_1$ as relations and as elements. Recall, as in the proof of 3.10, that we have

$$f \in [X, Y] \text{ iff } X f Y,$$

for all $X \in \mathcal{D}_0$ and $Y \in \mathcal{D}_1$. Therefore,

$$f \in \bigcap_{i<q}[X_{n_i}, Y_{m_i}] \text{ iff } \forall i < q.\, X_{n_i} f Y_{m_i}.$$

It follows that if f is recursively enumerable as a set of pairs, then, by forming all the non-empty intersections (as shown), we get an enumeration of all the neighbourhoods to which f belongs; and this is the same as the filter corresponding to f as an element of the function space. The converse direction is clear. □

We have nearly all our favourite combinators computable, but perhaps the most important one - since it is the key to recursive definitions - is the fixed-point combinator. It is not left out.

3.8.7 Theorem 7.6 — fix is computable

Theorem_7_6.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_12
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
```

```
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_15

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_24
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap
section
variable {α : Type*} {V : NeighborhoodSystem α}
variable (P : ComputablePresentation V)

theorem fixMap_isComputable
    (gN incl eq : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P P (decodeList c))
      : Set (ApproximableMap V V)).Nonempty) (hgNp : Nat.Primrec gN)
    (hincl : ∀ s, incl s = 1 ↔ P.X s.unpair.1 ⊆ P.X s.unpair.2) (hinclp : Nat.Primrec
     incl)
    (heq : ∀ s, eq s = 1 ↔ P.X s.unpair.1 = P.X s.unpair.2) (heqp : Nat.Primrec eq) :
    ComputableMap
      (funPresentation P P gN incl incl eq hgN hgNp hincl hinclp hincl hinclp heq heqp
    ) P
      (fixMap V) := by
  constructor
  obtain ⟨fincl, hfinclp, hfincls⟩ :=
    (funPresentation P P gN incl incl eq hgN hgNp hincl hinclp hincl hinclp heq heqp).
    incl_computable
  have hfincl : ∀ s, fincl s = 1 ↔ Xenum P P gN s.unpair.1 ⊆ Xenum P P gN s.unpair.2
    :=
    fun s => (hfincls s).symm
  show REPred₂ (fun c ? => (fixMap V).rel (Xenum P P gN c) (P.X ?))
  refine ⟨fun w =>
      (fixChainChar P fincl w.unpair.2.unpair.1 w.unpair.1).unpair.2 = 1
      ∧ incl (Nat.pair (fixChainChar P fincl w.unpair.2.unpair.1 w.unpair.1).unpair.1
          w.unpair.2.unpair.2) = 1,
    ?_, ?_⟩
  .
    have hcc : Nat.Primrec (fun w => fixChainChar P fincl w.unpair.2.unpair.1 w.unpair
    .1) :=
      ((primrec_fixChainChar P fincl hfinclp).comp
        ((Nat.Primrec.left.comp Nat.Primrec.right).pair Nat.Primrec.left)).of_eq (fun
    w => by
          simp only [unpair_pair_fst, unpair_pair_snd])
    have hA : Nat.Primrec (fun w =>
        (fixChainChar P fincl w.unpair.2.unpair.1 w.unpair.1).unpair.2) :=
      Nat.Primrec.right.comp hcc
    have hB : Nat.Primrec (fun w => incl (Nat.pair
        (fixChainChar P fincl w.unpair.2.unpair.1 w.unpair.1).unpair.1 w.unpair.2.
    unpair.2)) :=
      hinclp.comp ((Nat.Primrec.left.comp hcc).pair (Nat.Primrec.right.comp Nat.
    Primrec.right))
    exact (RecDecidable.natEq hA (Nat.Primrec.const 1)).and
```

```
      (RecDecidable.natEq hB (Nat.Primrec.const 1))
  .
    intro t
    show (fixMap V).rel (Xenum P P gN t.unpair.1) (P.X t.unpair.2) ↔ _
    rw [fixMap_rel_iff P gN hgN t.unpair.1 t.unpair.2]
    constructor
    · rintro ⟨full, hsteps, hlast⟩
      refine ⟨encodeList full, ?_⟩
      simp only [unpair_pair_fst, unpair_pair_snd]
      have hdec : decodeList (encodeList full) = full := decodeList_encodeList full
      obtain ⟨hfst, hsnd⟩ := fixChainChar_spec P fincl t.unpair.1 (encodeList full)
      rw [hdec] at hfst hsnd
      refine ⟨hsnd.mpr
        ((chainDec_iff_gStepsOK P gN hgN fincl hfincl t.unpair.1 full P.masterIdx).mpr
     hsteps), ?_⟩
      rw [hfst, hincl, unpair_pair_fst, unpair_pair_snd]
      exact hlast
    · rintro ⟨i, hi⟩
      simp only [unpair_pair_fst, unpair_pair_snd] at hi
      obtain ⟨hi1, hi2⟩ := hi
      obtain ⟨hfst, hsnd⟩ := fixChainChar_spec P fincl t.unpair.1 i
      refine ⟨decodeList i, ?_, ?_⟩
      · exact (chainDec_iff_gStepsOK P gN hgN fincl hfincl t.unpair.1 (decodeList i)
          P.masterIdx).mp (hsnd.mp hi1)
      · rw [← hfst]
        have hi2' := (hincl (Nat.pair (fixChainChar P fincl t.unpair.1 i).unpair.1
          t.unpair.2)).mp hi2
        rwa [unpair_pair_fst, unpair_pair_snd] at hi2'
end

section
set_option linter.unusedVariables false

theorem theorem_76.{u_1} : ∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V) (gN incl eq :
    Nat → Nat)
  (hgN :
    ∀ (c : Nat),
      Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
        (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α V V)
          (@DomainTheory.NeighbourhoodSystems.stepFun α α V V
            (@DomainTheory.NeighbourhoodSystems.funListOf α α V V P P (Domain.
    Recursive.decodeList c)))))
  (hgNp : Nat.Primrec gN)
  (hincl :
    ∀ (s : Nat),
      Iff (@Eq Nat (incl s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
        (@LE.le (Set α) (@Set.instLE α)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P (@Prod.
    fst Nat Nat (Nat.unpair s)))
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P (@Prod.
    snd Nat Nat (Nat.unpair s)))))
  (hinclp : Nat.Primrec incl)
  (heq :
    ∀ (s : Nat),
```

```
      Iff (@Eq Nat (eq s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
        (@Eq (Set α)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P (@Prod.
    fst Nat Nat (Nat.unpair s)))
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P (@Prod.
    snd Nat Nat (Nat.unpair s)))))
  (heqp : Nat.Primrec eq),
  @DomainTheory.NeighbourhoodSystems.ComputableMap (@DomainTheory.NeighbourhoodSystems
    .ApproximableMap α α V V) α
    (@DomainTheory.NeighbourhoodSystems.funSpace α α V V) V
    (@DomainTheory.NeighbourhoodSystems.funPresentation α α V V P P gN incl incl eq
    hgN hgNp hincl hinclp hincl hinclp
      heq heqp)
    P (@DomainTheory.NeighbourhoodSystems.fixMap α V) :=
  @DomainTheory.NeighbourhoodSystems.fixMap_isComputable
end

namespace Exercise722
open Set Domain.Recursive

section
def boolNat (b : Bool) : ℕ := if b then 1 else 0
end

section
theorem boolNat_eq_one_iff (b : Bool) : boolNat b = 1 ↔ b := by
  cases b <;> simp [boolNat]
end

section
theorem boolNat_zero_one (b : Bool) : boolNat b = 0 ∨ boolNat b = 1 := by
  cases b <;> simp [boolNat]
end

section
def encodeListBool (σ : List Bool) : ℕ := encodeList (σ.map boolNat)
end

section

def SExpr.encode : SExpr → ℕ
  | .sigma => Nat.pair 0 0
  | .single σ => Nat.pair 1 (encodeListBool σ)
  | .cat a b => Nat.pair 2 (Nat.pair (encode a) (encode b))
  | .cap a b => Nat.pair 3 (Nat.pair (encode a) (encode b))
end

end Exercise722
namespace Exercise718
open NeighborhoodSystem Domain.Recursive ApproximableMap

section
variable {α β : Type*}
variable {V : NeighborhoodSystem α}

def fiber2 (S : Set (ℕ × (ℕ × α))) (i j : ℕ) : Set α := fiber (fiber S i) j
```

```
@[simp] theorem mem_fiber2 {S : Set (ℕ × (ℕ × α))} {i j : ℕ} {a : α} :
    a ∈ fiber2 S i j ↔ (i, (j, a)) ∈ S := Iff.rfl

theorem fiber2_inter (S S' : Set (ℕ × (ℕ × α))) (i j : ℕ) :
    fiber2 (S ∩ S') i j = fiber2 S i j ∩ fiber2 S' i j := rfl

theorem fiber2_master (i j : ℕ) :
    fiber2 ((iterSys (iterSys V)).master) i j = V.master := by
  show fiber (fiber ((iterSys (iterSys V)).master) i) j = V.master
  rw [fiber_iterSys_master, fiber_iterSys_master]

theorem fiber2_mono {S S' : Set (ℕ × (ℕ × α))} (h : S ⊆ S') (i j : ℕ) :
    fiber2 S i j ⊆ fiber2 S' i j := fun _ ha => h ha

theorem mem_fiber2_of_mem {S : Set (ℕ × (ℕ × α))} (hS : (iterSys (iterSys V)).mem S)
    (i j : ℕ) :
    V.mem (fiber2 S i j) := (hS.1 i).1 j

end

end Exercise718
namespace Exercise722
open Set Domain.Recursive

section
def natBool (n : ℕ) : Option Bool :=
  match n with | 0 => some false | 1 => some true | _ => none
end

section
def decodeListBool (n : ℕ) : Option (List Bool) :=
  (decodeList n).mapM natBool
end

section

def decodeFuel (fuel : ℕ) (n : ℕ) : Option SExpr :=
  match fuel with
  | 0 => none
  | fuel + 1 =>
    match n.unpair.1 with
    | 0 => if n.unpair.2 = 0 then some .sigma else none
    | 1 => (decodeListBool n.unpair.2).map (.single ·)
    | 2 =>
      match decodeFuel fuel n.unpair.2.unpair.1, decodeFuel fuel n.unpair.2.unpair.2
    with
      | some a, some b => some (.cat a b)
      | _, _ => none
    | 3 =>
      match decodeFuel fuel n.unpair.2.unpair.1, decodeFuel fuel n.unpair.2.unpair.2
    with
      | some a, some b => some (.cap a b)
      | _, _ => none
    | _ => none
end
```

```
section

def SExpr.decode (n : ℕ) : Option SExpr := decodeFuel (n.unpair.2 + 1) n.unpair.1
end

section

def SsysX (n : ℕ) : Set (List Bool) :=
  match SExpr.decode n with
  | none => SsysX_default
  | some e =>
    if decideNonemptyB e then denote e else SsysX_default
end

section
theorem SsysX_mem (n : ℕ) : InS (SsysX n) := by
  unfold SsysX
  cases hdec : SExpr.decode n with
  | none => simp; exact InS.univ
  | some e =>
    by_cases h : decideNonemptyB e = true
    · simp [h]
      exact InS_denote_of_nonempty ((decideNonemptyB_iff e).1 h)
    · simp [h]
      exact InS.univ
end

section
theorem decodeFuel_pair_cap_isSome_iff (fuel c : ℕ) :
    (match decodeFuel fuel c.unpair.2.unpair.1, decodeFuel fuel c.unpair.2.unpair.2
    with
      | some a, some b => some (SExpr.cap a b) | _, _ => none).isSome = true ↔
      (decodeFuel fuel c.unpair.2.unpair.1).isSome = true ∧
        (decodeFuel fuel c.unpair.2.unpair.2).isSome = true := by
  cases decodeFuel fuel c.unpair.2.unpair.1 <;> cases decodeFuel fuel c.unpair.2.
    unpair.2 <;> simp
end

section
theorem decodeFuel_pair_cat_isSome_iff (fuel c : ℕ) :
    (match decodeFuel fuel c.unpair.2.unpair.1, decodeFuel fuel c.unpair.2.unpair.2
    with
      | some a, some b => some (SExpr.cat a b) | _, _ => none).isSome = true ↔
      (decodeFuel fuel c.unpair.2.unpair.1).isSome = true ∧
        (decodeFuel fuel c.unpair.2.unpair.2).isSome = true := by
  cases decodeFuel fuel c.unpair.2.unpair.1 <;> cases decodeFuel fuel c.unpair.2.
    unpair.2 <;> simp
end

section
theorem decodeFuel_succ_cap (fuel c : ℕ) (h : c.unpair.1 = 3) :
    decodeFuel (fuel + 1) c =
      match decodeFuel fuel c.unpair.2.unpair.1, decodeFuel fuel c.unpair.2.unpair.2
    with
      | some a, some b => some (.cap a b)
```

```
      | _, _ => none := by
  simp [decodeFuel, h]
end

section
theorem decodeFuel_succ_cat (fuel c : ℕ) (h : c.unpair.1 = 2) :
    decodeFuel (fuel + 1) c =
      match decodeFuel fuel c.unpair.2.unpair.1, decodeFuel fuel c.unpair.2.unpair.2
    with
      | some a, some b => some (.cat a b)
      | _, _ => none := by
  simp [decodeFuel, h]
end

section
theorem decodeFuel_succ_junk (fuel c : ℕ) (h : 4 ≤ c.unpair.1) :
    decodeFuel (fuel + 1) c = none := by
  match tag : c.unpair.1 with
  | 0 | 1 | 2 | 3 => omega
  | t + 4 => simp [decodeFuel, tag]
end

section
theorem decodeFuel_succ_not_sigma (fuel c : ℕ) (h : c.unpair.1 = 0) (hσ : c.unpair.2 =
     0) :
    decodeFuel (fuel + 1) c = none := by simp [decodeFuel, h, hσ]
end

section
theorem decodeFuel_succ_sigma (fuel c : ℕ) (h : c.unpair.1 = 0) (hσ : c.unpair.2 = 0)
    :
    decodeFuel (fuel + 1) c = some .sigma := by simp [decodeFuel, h, hσ]
end

section
theorem decodeFuel_succ_single (fuel c : ℕ) (h : c.unpair.1 = 1) :
    decodeFuel (fuel + 1) c = (decodeListBool c.unpair.2).map (.single ·) := by
  simp [decodeFuel, h]
end

section
theorem decodeListBool_encodeListBool (σ : List Bool) :
    decodeListBool (encodeListBool σ) = some σ := by
  simp [decodeListBool, encodeListBool, decodeList_encodeList, List.mapM_map]
  induction σ with
  | nil => rfl
  | cons b bs ih =>
    cases b <;> simp [boolNat, natBool, ih]
end

section
theorem natBinDigit_of_natBool_some (n : ℕ) {b : Bool} (h : natBool n = some b) :
    n = 0 ∨ n = 1 := by
  match n with
  | 0 => simp [natBool] at h; exact Or.inl rfl
  | 1 => simp [natBool] at h; exact Or.inr rfl
```

```
  | n + 2 => simp [natBool] at h
end

section
theorem natBool_isSome_iff (n : ℕ) :
    (natBool n).isSome = true ↔ n = 0 ∨ n = 1 := by
  match n with
  | 0 => simp [natBool]
  | 1 => simp [natBool]
  | n + 2 => simp [natBool]
end

section
theorem mapM_natBool_isSome_iff (l : List ℕ) :
    (l.mapM natBool).isSome = true ↔ ∀ x ∈ l, x = 0 ∨ x = 1 := by
  induction l with
  | nil => simp
  | cons x xs ih =>
    rw [List.mapM_cons]
    constructor
    · intro h
      cases hnx : natBool x with
      | none => simp [hnx] at h
      | some b =>
        cases htx : xs.mapM natBool with
        | none => simp [hnx, htx] at h
        | some ts =>
          have hxs' : (xs.mapM natBool).isSome = true := by simp [htx]
          intro y hy
          rcases List.mem_cons.mp hy with hEq | hyTail
          · rw [hEq]
            exact natBinDigit_of_natBool_some x hnx
          · exact ih.mp hxs' y hyTail
    · intro h
      have hx : (natBool x).isSome = true :=
        (natBool_isSome_iff x).2 (h x (List.mem_cons_self ..))
      have hxs : (xs.mapM natBool).isSome = true :=
        ih.mpr fun y hy => h y (List.mem_cons_of_mem x hy)
      cases hnx : natBool x with
      | none =>
        rcases h x (List.mem_cons_self ..) with h0 | h1
        · subst h0; simp [natBool] at hnx
        · subst h1; simp [natBool] at hnx
      | some b =>
        cases htx : xs.mapM natBool with
        | none => simp [htx] at hxs
        | some ts => simp
end

section

theorem decodeListBool_isSome_iff (n : ℕ) :
    (decodeListBool n).isSome = true ↔ allBinDigitsChar n = 1 := by
  simp only [decodeListBool, mapM_natBool_isSome_iff, allBinDigitsChar_eq_one_iff]
end
```

```
section

theorem decodeFuelOkChar_eq_one_iff (fuel c : ℕ) :
    decodeFuelOkChar fuel c = 1 ↔ (decodeFuel fuel c).isSome = true := by
  induction fuel generalizing c with
  | zero =>
    simp [decodeFuelOkChar, decodeFuel]
  | succ fuel ih =>
    simp only [decodeFuelOkChar]
    rw [decodeFuelOkCharBody_eq]
    match tag : c.unpair.1 with
    | 0 =>
      rw [show decodeFuel (fuel + 1) c = if c.unpair.2 = 0 then some .sigma else none
    from by
        by_cases hσ : c.unpair.2 = 0 <;> simp [decodeFuel, tag, hσ]]
      simp [selectFn_isOne_one_sub_sigma]
    | 1 =>
      rw [decodeFuel_succ_single fuel c tag]
      simp [decodeListBool_isSome_iff, Option.isSome_map]
    | 2 =>
      simp
      rw [decodeFuel_succ_cat fuel c tag, mulBit_eq_one_iff]
      have ih1 := ih c.unpair.2.unpair.1
      have ih2 := ih c.unpair.2.unpair.2
      cases hL : decodeFuel fuel c.unpair.2.unpair.1 <;>
        cases hR : decodeFuel fuel c.unpair.2.unpair.2 <;>
        simp [hL, hR, ih1, ih2]
    | 3 =>
      simp
      rw [decodeFuel_succ_cap fuel c tag, mulBit_eq_one_iff]
      have ih1 := ih c.unpair.2.unpair.1
      have ih2 := ih c.unpair.2.unpair.2
      cases hL : decodeFuel fuel c.unpair.2.unpair.1 <;>
        cases hR : decodeFuel fuel c.unpair.2.unpair.2 <;>
        simp [hL, hR, ih1, ih2]
    | t + 4 =>


      rw [decodeFuel_succ_junk fuel c (by omega)]
      simp
end

end Exercise722
namespace Exercise718
open NeighborhoodSystem Domain.Recursive ApproximableMap

section
variable {α β : Type*}
variable {V : NeighborhoodSystem α}

def reindexF (W : Set (ℕ × α)) : Set (ℕ × (ℕ × α)) :=
  {p | p.2.2 ∈ fiber W (Nat.pair p.1 p.2.1)}

@[simp] theorem fiber2_reindexF (W : Set (ℕ × α)) (i j : ℕ) :
    fiber2 (reindexF W) i j = fiber W (Nat.pair i j) := rfl

def reindexG (S : Set (ℕ × (ℕ × α))) : Set (ℕ × α) :=
```

```
  {p | p.2 ∈ fiber2 S (Nat.unpair p.1).1 (Nat.unpair p.1).2}

@[simp] theorem fiber_reindexG (S : Set (ℕ × (ℕ × α))) (k : ℕ) :
    fiber (reindexG S) k = fiber2 S (Nat.unpair k).1 (Nat.unpair k).2 := rfl

theorem exists_inner_bound {S : Set (ℕ × (ℕ × α))} (hS : (iterSys (iterSys V)).mem S)
    :
    ∀ n, ∃ M, ∀ i, i < n → ∀ j, M ≤ j → fiber2 S i j = V.master := by
  intro n
  induction n with
  | zero => exact ⟨0, fun i hi => absurd hi (Nat.not_lt_zero i)⟩
  | succ n ih =>
    obtain ⟨M, hM⟩ := ih
    obtain ⟨Mn, hMn⟩ := (hS.1 n).2
    refine ⟨max M Mn, fun i hi j hj => ?_⟩
    rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hlt | heq
    · exact hM i hlt j (le_trans (le_max_left _ _) hj)
    · subst heq
      exact hMn j (le_trans (le_max_right _ _) hj)

theorem pair_lt_pair_of_lt {x y i j : ℕ} (hx : x < i) (hy : y < j) :
    Nat.pair x y < Nat.pair i j := by
  have hms : ∀ z : ℕ, (z + 1) * (z + 1) = z * z + 2 * z + 1 := fun z => by
    rw [Nat.succ_mul, Nat.mul_succ]; omega
  have hlt : Nat.pair x y < (max x y + 1) * (max x y + 1) := by
    unfold Nat.pair
    rcases lt_or_ge x y with h | h
    · rw [ite_eq_left h, show max x y = y by omega, hms]; omega
    · rw [ite_eq_right (by omega), show max x y = x by omega, hms]; omega
  have hle : max i j * max i j ≤ Nat.pair i j := by
    unfold Nat.pair
    rcases lt_or_ge i j with h | h
    · rw [ite_eq_left h, show max i j = j by omega]; omega
    · rw [ite_eq_right (by omega), show max i j = i by omega]; omega
  have h3 : max x y + 1 ≤ max i j := by
    rcases le_total x y with h | h
    · rw [max_eq_right h]; have := le_max_right i j; omega
    · rw [max_eq_left h]; have := le_max_left i j; omega
  have h4 : (max x y + 1) * (max x y + 1) ≤ max i j * max i j := Nat.mul_le_mul h3 h3
  omega

theorem reindexF_mem {W : Set (ℕ × α)} (hW : (iterSys V).mem W) :
    (iterSys (iterSys V)).mem (reindexF W) := by
  obtain ⟨hWf, Nw, hNw⟩ := hW
  refine ⟨fun i => ⟨fun j => ?_, Nw, fun j hj => ?_⟩, Nw, fun i hi => ?_⟩
  ·
    show V.mem (fiber2 (reindexF W) i j)
    rw [fiber2_reindexF]; exact hWf (Nat.pair i j)
  ·
    show fiber2 (reindexF W) i j = V.master
    rw [fiber2_reindexF]
    exact hNw (Nat.pair i j) (le_trans hj (le_pair_right i j))
  ·
    apply eq_of_fiber_eq
    intro j
    show fiber2 (reindexF W) i j = fiber ((iterSys V).master) j
```

```
    rw [fiber2_reindexF, fiber_iterSys_master]
    exact hNw (Nat.pair i j) (le_trans hi (le_pair_left i j))

theorem reindexF_subset_iff {W : Set (ℕ × α)} {S : Set (ℕ × (ℕ × α))} :
    reindexF W ⊆ S ↔ ∀ i j, fiber W (Nat.pair i j) ⊆ fiber2 S i j := by
  constructor
  · intro h i j
    have := fiber2_mono h i j
    rwa [fiber2_reindexF] at this
  · intro h
    refine subset_of_fiber_subset (fun i => subset_of_fiber_subset (fun j => ?_))
    show fiber2 (reindexF W) i j ⊆ fiber2 S i j
    rw [fiber2_reindexF]; exact h i j

def Fmap (V : NeighborhoodSystem α) : ApproximableMap (iterSys V) (iterSys (iterSys V)
    ) where
  rel W S := (iterSys V).mem W ∧ (iterSys (iterSys V)).mem S ∧
    ∀ i j, fiber W (Nat.pair i j) ⊆ fiber2 S i j
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(iterSys V).master_mem, (iterSys (iterSys V)).master_mem, fun i j =>
    by
    rw [fiber_iterSys_master, fiber2_master]⟩
  inter_right := by
    rintro W S S' ⟨hW, hS, hf⟩ ⟨-, hS', hf'⟩
    refine ⟨hW, (iterSys (iterSys V)).inter_mem hS hS' (reindexF_mem hW) ?_, fun i j =>
     ?_⟩
    · exact Set.subset_inter (reindexF_subset_iff.mpr hf) (reindexF_subset_iff.mpr hf')
    · rw [fiber2_inter]; exact Set.subset_inter (hf i j) (hf' i j)
  mono := by
    rintro W W' S S' ⟨hW, hS, hf⟩ hW'W hSS' hW' hS'
    exact ⟨hW', hS', fun i j => ((fiber_mono hW'W _).trans (hf i j)).trans (fiber2_mono
     hSS' i j)⟩

@[simp] theorem Fmap_rel {W : Set (ℕ × α)} {S : Set (ℕ × (ℕ × α))} :
    (Fmap V).rel W S ↔ (iterSys V).mem W ∧ (iterSys (iterSys V)).mem S ∧
      ∀ i j, fiber W (Nat.pair i j) ⊆ fiber2 S i j := Iff.rfl

theorem reindexG_mem {S : Set (ℕ × (ℕ × α))} (hS : (iterSys (iterSys V)).mem S) :
    (iterSys V).mem (reindexG S) := by
  obtain ⟨No, hNo⟩ := hS.2
  obtain ⟨M, hM⟩ := exists_inner_bound hS No
  refine ⟨fun k => ?_, Nat.pair No M, fun k hk => ?_⟩
  ·
    rw [fiber_reindexG]; exact mem_fiber2_of_mem hS _ _
  ·
    rw [fiber_reindexG]
    set i := (Nat.unpair k).1 with hi
    set j := (Nat.unpair k).2 with hj
    by_cases hiN : i < No
    · by_cases hjM : j < M
      · exfalso
        have hklt : Nat.pair i j < Nat.pair No M := pair_lt_pair_of_lt hiN hjM
        rw [pair_unpair] at hklt
        omega
      · exact hM i hiN j (not_lt.mp hjM)
```

```
    · have h1 : fiber S i = (iterSys V).master := hNo i (not_lt.mp hiN)
      show fiber2 S i j = V.master
      rw [fiber2, h1, fiber_iterSys_master]

theorem reindexG_subset_iff {S : Set (ℕ × (ℕ × α))} {W : Set (ℕ × α)} :
    reindexG S ⊆ W ↔ ∀ k, fiber2 S (Nat.unpair k).1 (Nat.unpair k).2 ⊆ fiber W k :=
    by
  constructor
  · intro h k
    have := fiber_mono h k
    rwa [fiber_reindexG] at this
  · intro h
    refine subset_of_fiber_subset (fun k => ?_)
    rw [fiber_reindexG]; exact h k

def Gmap (V : NeighborhoodSystem α) : ApproximableMap (iterSys (iterSys V)) (iterSys V
    ) where
  rel S W := (iterSys (iterSys V)).mem S ∧ (iterSys V).mem W ∧
    ∀ k, fiber2 S (Nat.unpair k).1 (Nat.unpair k).2 ⊆ fiber W k
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(iterSys (iterSys V)).master_mem, (iterSys V).master_mem, fun k => by
    rw [fiber2_master, fiber_iterSys_master]⟩
  inter_right := by
    rintro S W W' ⟨hS, hW, hg⟩ ⟨-, hW', hg'⟩
    refine ⟨hS, (iterSys V).inter_mem hW hW' (reindexG_mem hS) ?_, fun k => ?_⟩
    · exact Set.subset_inter (reindexG_subset_iff.mpr hg) (reindexG_subset_iff.mpr hg')
    · rw [fiber_inter]; exact Set.subset_inter (hg k) (hg' k)
  mono := by
    rintro S S' W W' ⟨hS, hW, hg⟩ hS'S hWW' hS' hW'
    exact ⟨hS', hW', fun k => ((fiber2_mono hS'S _ _).trans (hg k)).trans (fiber_mono
    hWW' k)⟩

@[simp] theorem Gmap_rel {S : Set (ℕ × (ℕ × α))} {W : Set (ℕ × α)} :
    (Gmap V).rel S W ↔ (iterSys (iterSys V)).mem S ∧ (iterSys V).mem W ∧
      ∀ k, fiber2 S (Nat.unpair k).1 (Nat.unpair k).2 ⊆ fiber W k := Iff.rfl

theorem Fmap_comp_Gmap : (Fmap V).comp (Gmap V) = idMap (iterSys (iterSys V)) := by
  apply ApproximableMap.ext
  intro S S'
  rw [comp_rel, idMap_rel]
  constructor
  · rintro ⟨W, ⟨hS, hW, hg⟩, ⟨-, hS', hf⟩⟩
    refine ⟨hS, hS', subset_of_fiber_subset (fun i => subset_of_fiber_subset (fun j =>
    ?_))⟩
    show fiber2 S i j ⊆ fiber2 S' i j
    have h1 : fiber2 S i j ⊆ fiber W (Nat.pair i j) := by
      have := hg (Nat.pair i j)
      rwa [unpair_pair_fst, unpair_pair_snd] at this
    exact h1.trans (hf i j)
  · rintro ⟨hS, hS', hSS'⟩
    refine ⟨reindexG S, ⟨hS, reindexG_mem hS, ?_⟩, ⟨reindexG_mem hS, hS', ?_⟩⟩
    · intro k; rw [fiber_reindexG]
    · intro i j
      rw [fiber_reindexG, unpair_pair_fst, unpair_pair_snd]
      exact fiber2_mono hSS' i j
```

```
theorem Gmap_comp_Fmap : (Gmap V).comp (Fmap V) = idMap (iterSys V) := by
  apply ApproximableMap.ext
  intro W W'
  rw [comp_rel, idMap_rel]
  constructor
  · rintro ⟨S, ⟨hW, hS, hf⟩, ⟨-, hW', hg⟩⟩
    refine ⟨hW, hW', subset_of_fiber_subset (fun k => ?_)⟩
    have h1 : fiber W k ⊆ fiber2 S (Nat.unpair k).1 (Nat.unpair k).2 := by
      have := hf (Nat.unpair k).1 (Nat.unpair k).2
      rwa [pair_unpair] at this
    exact h1.trans (hg k)
  · rintro ⟨hW, hW', hWW'⟩
    refine ⟨reindexF W, ⟨hW, reindexF_mem hW, ?_⟩, ⟨reindexF_mem hW, hW', ?_⟩⟩
    · intro i j; rw [fiber2_reindexF]
    · intro k
      rw [fiber2_reindexF, pair_unpair]
      exact fiber_mono hWW' k

end

section
variable {α β : Type*}
variable {V : NeighborhoodSystem α}
variable (P : ComputablePresentation V)

theorem fiber2_iterEnum_iter (m i j : ℕ) :
    fiber2 (iterEnum (iterPresentation P) m) i j
      = P.X (iterIdx P (iterIdx (iterPresentation P) m i) j) := by
  show fiber (fiber (iterEnum (iterPresentation P) m) i) j = _
  rw [fiber_iterEnum, iterPresentation_X, fiber_iterEnum]
end

section
variable {α β : Type*}
variable {V : NeighborhoodSystem α}
variable (P : ComputablePresentation V)
variable {P}

theorem Gmap_rel_enum_iff (s n : ℕ) :
    (Gmap V).rel (iterEnum (iterPresentation P) s) (iterEnum P n) ↔
      ∀ k, k < n →
        P.X (iterIdx P (iterIdx (iterPresentation P) s (Nat.unpair k).1) (Nat.unpair k
   ).2)
          ⊆ P.X (iterIdx P n k) := by
  rw [Gmap_rel]
  have hmem₁ := iterEnum_mem (P := iterPresentation P) s
  have hmem₂ := iterEnum_mem (P := P) n
  constructor
  · rintro ⟨-, -, hg⟩ k _
    have := hg k
    rwa [fiber2_iterEnum_iter, fiber_iterEnum] at this
  · intro hbd
    refine ⟨hmem₁, hmem₂, fun k => ?_⟩
    rw [fiber2_iterEnum_iter, fiber_iterEnum]
    by_cases hk : k < n
```

```
    · exact hbd k hk
    · rw [iterIdx_ge (not_lt.mp hk), P.masterIdx_spec]
      exact V.sub_master (P.mem_X _)

theorem Gmap_isComputable :
    ComputableMap (iterPresentation (iterPresentation P)) (iterPresentation P) (Gmap V
    ) := by
  constructor

  have hLHS : Nat.Primrec (fun u : ℕ =>
      iterIdx P (iterIdx (iterPresentation P) u.unpair.2.unpair.1 u.unpair.1.unpair.1)
        u.unpair.1.unpair.2) := by
    have hinner : Nat.Primrec (fun u : ℕ =>
        iterIdx (iterPresentation P) u.unpair.2.unpair.1 u.unpair.1.unpair.1) := by
      refine (primrec_nthCode.comp
        ((Nat.Primrec.left.comp Nat.Primrec.right).pair
          ((Nat.Primrec.left.comp Nat.Primrec.left).pair
            (Nat.Primrec.const (iterPresentation P).masterIdx)))).of_eq (fun u => ?_)
      simp only [iterIdx, unpair_pair_fst, unpair_pair_snd]
    refine (primrec_nthCode.comp
      (hinner.pair ((Nat.Primrec.right.comp Nat.Primrec.left).pair
        (Nat.Primrec.const P.masterIdx)))).of_eq (fun u => ?_)
    simp only [iterIdx, unpair_pair_fst, unpair_pair_snd]
  have hRHS : Nat.Primrec (fun u : ℕ =>
      iterIdx P u.unpair.2.unpair.2 u.unpair.1) := by
    refine (primrec_nthCode.comp
      ((Nat.Primrec.right.comp Nat.Primrec.right).pair
        (Nat.Primrec.left.pair (Nat.Primrec.const P.masterIdx)))).of_eq (fun u => ?_)
    simp only [iterIdx, unpair_pair_fst, unpair_pair_snd]
  have hp₂ : RecDecidable (fun u : ℕ =>
      P.X (iterIdx P (iterIdx (iterPresentation P) u.unpair.2.unpair.1 u.unpair.1.
    unpair.1)
        u.unpair.1.unpair.2) ⊆ P.X (iterIdx P u.unpair.2.unpair.2 u.unpair.1)) := by
    refine RecDecidable.of_iff (fun u => ?_) (P.incl_computable.comp (hLHS.pair hRHS))
    simp only [unpair_pair_fst, unpair_pair_snd]
  have hbound₁ : Nat.Primrec (fun t : ℕ => t.unpair.2) := Nat.Primrec.right
  have hp₀ := hp₂.bForall hbound₁
  refine (RecDecidable.of_iff (fun t => ?_) hp₀).re
  simp only [iterPresentation_X, unpair_pair_fst, unpair_pair_snd]
  exact Gmap_rel_enum_iff t.unpair.1 t.unpair.2

end

section
variable {α β : Type*}
variable {V : NeighborhoodSystem α}
variable (P : ComputablePresentation V)

theorem masterIdx_iterPresentation : (iterPresentation P).masterIdx = 0 := rfl
end

section
variable {α β : Type*}
variable {V : NeighborhoodSystem α}
variable (P : ComputablePresentation V)
variable {P}
```

```
theorem Fmap_rel_enum_iff (n m : ℕ) :
    (Fmap V).rel (iterEnum P n) (iterEnum (iterPresentation P) m) ↔
      ∀ i, i < m → ∀ j, j < iterIdx (iterPresentation P) m i →
        P.X (iterIdx P n (Nat.pair i j)) ⊆ P.X (iterIdx P (iterIdx (iterPresentation P
   ) m i) j) := by
  rw [Fmap_rel]
  have hmem₁ := iterEnum_mem (P := P) n
  have hmem₂ := iterEnum_mem (P := iterPresentation P) m
  constructor
  · rintro ⟨-, -, hf⟩ i _ j _
    have := hf i j
    rwa [fiber_iterEnum, fiber2_iterEnum_iter] at this
  · intro hbd
    refine ⟨hmem₁, hmem₂, fun i j => ?_⟩
    rw [fiber_iterEnum, fiber2_iterEnum_iter]
    by_cases hi : i < m
    · by_cases hj : j < iterIdx (iterPresentation P) m i
      · exact hbd i hi j hj
      ·
        rw [iterIdx_ge (not_lt.mp hj), P.masterIdx_spec]
        exact V.sub_master (P.mem_X _)
    ·
      have h0 : iterIdx (iterPresentation P) m i = 0 := by
        rw [iterIdx_ge (not_lt.mp hi), masterIdx_iterPresentation]
      rw [h0, iterIdx_ge (Nat.zero_le j), P.masterIdx_spec]
      exact V.sub_master (P.mem_X _)

theorem Fmap_isComputable :
    ComputableMap (iterPresentation P) (iterPresentation (iterPresentation P)) (Fmap V
   ) := by
  constructor

  have hLHS : Nat.Primrec (fun u : ℕ =>
      iterIdx P u.unpair.2.unpair.2.unpair.1 (Nat.pair u.unpair.2.unpair.1 u.unpair.1)
   ) := by
    refine (primrec_nthCode.comp
      ((Nat.Primrec.left.comp (Nat.Primrec.right.comp Nat.Primrec.right)).pair
        (((Nat.Primrec.left.comp Nat.Primrec.right).pair Nat.Primrec.left).pair
          (Nat.Primrec.const P.masterIdx)))).of_eq (fun u => ?_)
    simp only [iterIdx, unpair_pair_fst, unpair_pair_snd]
  have hRHS : Nat.Primrec (fun u : ℕ =>
      iterIdx P (iterIdx (iterPresentation P) u.unpair.2.unpair.2.unpair.2 u.unpair.2.
    unpair.1)
      u.unpair.1) := by
    have hinner : Nat.Primrec (fun u : ℕ =>
      iterIdx (iterPresentation P) u.unpair.2.unpair.2.unpair.2 u.unpair.2.unpair.1)
     := by
      refine (primrec_nthCode.comp
        ((Nat.Primrec.right.comp (Nat.Primrec.right.comp Nat.Primrec.right)).pair
          ((Nat.Primrec.left.comp Nat.Primrec.right).pair
            (Nat.Primrec.const (iterPresentation P).masterIdx)))).of_eq (fun u => ?_)
      simp only [iterIdx, unpair_pair_fst, unpair_pair_snd]
    refine (primrec_nthCode.comp
      (hinner.pair (Nat.Primrec.left.pair (Nat.Primrec.const P.masterIdx)))).of_eq (
    fun u => ?_)
```

```
    simp only [iterIdx, unpair_pair_fst, unpair_pair_snd]
  have hp₂ : RecDecidable (fun u : ℕ =>
      P.X (iterIdx P u.unpair.2.unpair.2.unpair.1 (Nat.pair u.unpair.2.unpair.1 u.
    unpair.1))
        ⊆ P.X (iterIdx P (iterIdx (iterPresentation P) u.unpair.2.unpair.2.unpair.2
          u.unpair.2.unpair.1) u.unpair.1)) := by
    refine RecDecidable.of_iff (fun u => ?_) (P.incl_computable.comp (hLHS.pair hRHS))
    simp only [unpair_pair_fst, unpair_pair_snd]

  have hbound₂ : Nat.Primrec (fun v : ℕ =>
      iterIdx (iterPresentation P) v.unpair.2.unpair.2 v.unpair.1) := by
    refine (primrec_nthCode.comp
      ((Nat.Primrec.right.comp Nat.Primrec.right).pair
        (Nat.Primrec.left.pair (Nat.Primrec.const (iterPresentation P).masterIdx)))).
    of_eq
      (fun v => ?_)
    simp only [iterIdx, unpair_pair_fst, unpair_pair_snd]
  have hbound₁ : Nat.Primrec (fun t : ℕ => t.unpair.2) := Nat.Primrec.right
  have hp₁ := hp₂.bForall hbound₂
  have hp₀ := hp₁.bForall hbound₁
  refine (RecDecidable.of_iff (fun t => ?_) hp₀).re

  simp only [iterPresentation_X, unpair_pair_fst, unpair_pair_snd]
  exact Fmap_rel_enum_iff t.unpair.1 t.unpair.2

def iterIterEffectiveIso (P : ComputablePresentation V) :
    EffectiveIso (iterPresentation P) (iterPresentation (iterPresentation P)) where
  toMap := Fmap V
  invMap := Gmap V
  toMap_computable := Fmap_isComputable
  invMap_computable := Gmap_isComputable
  left_inv := Gmap_comp_Fmap
  right_inv := Fmap_comp_Gmap

end

end Exercise718
namespace Exercise722
open Set Domain.Recursive

section

def safeDecodeActive (n : ℕ) : SExpr :=
  match SExpr.decode n with
  | none => .sigma
  | some e => if decideNonemptyB e then e else .sigma
end

section
theorem SsysX_eq_denote_safe (n : ℕ) : SsysX n = denote (safeDecodeActive n) := by
  unfold SsysX safeDecodeActive
  cases hdec : SExpr.decode n with
  | none => simp [denote_sigma, SsysX_default]
  | some e =>
    by_cases hb : decideNonemptyB e = true
    · simp [hb]
```

```
    · simp [hb, denote_sigma, SsysX_default]
end

section
theorem safeDecodeActive_nonempty (n : ℕ) : (denote (safeDecodeActive n)).Nonempty :=
    by
  unfold safeDecodeActive
  cases hdec : SExpr.decode n with
  | none => exact Set.univ_nonempty
  | some e =>


    by_cases hb : decideNonemptyB e = true
    · simp [hb]; exact (decideNonemptyB_iff e).mp hb
    · simp [hb, denote_sigma]
end

section
theorem consistentB_safe_sigma (n : ℕ) : consistentB (safeDecodeActive n) .sigma =
    true := by
  rw [consistentB_iff, denote_cap, denote_sigma, Set.inter_univ]
  exact safeDecodeActive_nonempty n
end

section
theorem consistentB_sigma_safe (m : ℕ) : consistentB .sigma (safeDecodeActive m) =
    true := by
  rw [consistentB_iff, denote_cap, denote_sigma, Set.univ_inter]
  exact safeDecodeActive_nonempty m
end

section

def sexprDepth : SExpr → ℕ
  | .sigma => 1
  | .single _ => 1
  | .cat a b => 1 + max (sexprDepth a) (sexprDepth b)
  | .cap a b => 1 + max (sexprDepth a) (sexprDepth b)
end

section
theorem decodeFuel_encode {fuel : ℕ} {e : SExpr} (h : sexprDepth e ≤ fuel) :
    decodeFuel fuel (SExpr.encode e) = some e := by
  induction e generalizing fuel with
  | sigma =>
    cases fuel with
    | zero => simp [sexprDepth] at h
    | succ fuel =>
      simp [decodeFuel, SExpr.encode]
  | single σ =>
    cases fuel with
    | zero => simp [sexprDepth] at h
    | succ fuel =>
      simp [decodeFuel, SExpr.encode, decodeListBool_encodeListBool σ]
  | cat a b iha ihb =>
    cases fuel with
    | zero => simp [sexprDepth] at h
```

```
    | succ fuel =>
      have ha : sexprDepth a ≤ fuel := by
        simp only [sexprDepth] at h ⊢
        omega
      have hb : sexprDepth b ≤ fuel := by
        simp only [sexprDepth] at h ⊢
        omega
      simp [decodeFuel, SExpr.encode, iha ha, ihb hb]
  | cap a b iha ihb =>
    cases fuel with
    | zero => simp [sexprDepth] at h
    | succ fuel =>
      have ha : sexprDepth a ≤ fuel := by
        simp only [sexprDepth] at h ⊢
        omega
      have hb : sexprDepth b ≤ fuel := by
        simp only [sexprDepth] at h ⊢
        omega
      simp [decodeFuel, SExpr.encode, iha ha, ihb hb]
end

section

def SExpr.index (e : SExpr) : ℕ := Nat.pair (encode e) (sexprDepth e)
end

section
theorem SExpr.decode_index (e : SExpr) : decode (index e) = some e := by
  simp [decode, index]
  exact decodeFuel_encode (Nat.le_succ (sexprDepth e))
end

section
theorem SsysX_surj {Y : Set (List Bool)} (hY : InS Y) : ∃ n, SsysX n = Y := by
  obtain ⟨e, he, hne⟩ := inS_iff_exists_denote.mp hY
  refine ⟨SExpr.index e, ?_⟩
  unfold SsysX
  rw [SExpr.decode_index e]
  have hne' : (denote e).Nonempty := he ▸ hne
  have hb : decideNonemptyB e = true := (decideNonemptyB_iff e).2 hne'
  simp [hb, he]
end

section

def ssysActive (n : ℕ) : Bool :=
  match SExpr.decode n with
  | none => false
  | some e => decideNonemptyB e
end

section
theorem safeDecodeActive_inactive (n : ℕ) (h : ssysActive n = false) :
    safeDecodeActive n = .sigma := by
  dsimp only [ssysActive, safeDecodeActive] at h ⊢
  cases hdec : SExpr.decode n with
```

```
  | none => rfl
  | some e =>
    by_cases hb : decideNonemptyB e
    · exfalso
      simp [hdec, hb] at h
    · simp [hb]
end

section

def ssysConsistentB (n m : ℕ) : Bool :=
  if !ssysActive n || !ssysActive m then true
  else
    match SExpr.decode n, SExpr.decode m with
    | some a, some b => consistentB a b
    | _, _ => true
end

section
theorem ssysConsistentB_iff (n m : ℕ) :
    ssysConsistentB n m = true ↔
      consistentB (safeDecodeActive n) (safeDecodeActive m) = true := by
  by_cases hn : ssysActive n
  · by_cases hm : ssysActive m
    · cases hdecn : SExpr.decode n with
      | none => exfalso; simp [ssysActive, hdecn] at hn
      | some a =>
        cases hdecm : SExpr.decode m with
        | none => exfalso; simp [ssysActive, hdecm] at hm
        | some b =>
          have ha : decideNonemptyB a := by simpa [ssysActive, hdecn] using hn
          have hb : decideNonemptyB b := by simpa [ssysActive, hdecm] using hm
          have hsa : safeDecodeActive n = a := by simp [safeDecodeActive, hdecn, ha]
          have hsb : safeDecodeActive m = b := by simp [safeDecodeActive, hdecm, hb]
          constructor
          · intro h
            rw [hsa, hsb]
            have heq : ssysConsistentB n m = consistentB a b := by
              unfold ssysConsistentB
              simp [hn, hm, hdecn, hdecm]
            rw [heq] at h
            exact h
          · intro hcons
            rw [hsa, hsb] at hcons
            have heq : ssysConsistentB n m = consistentB a b := by
              unfold ssysConsistentB
              simp [hn, hm, hdecn, hdecm]
            rw [heq]
            exact hcons
    · have hm' : ssysActive m = false := by simpa using hm
      constructor
      · intro _; rw [safeDecodeActive_inactive m hm', consistentB_safe_sigma n]
      · intro _; unfold ssysConsistentB; simp [hn, hm']
  · have hn' : ssysActive n = false := by simpa using hn
    constructor
    · intro _; rw [safeDecodeActive_inactive n hn', consistentB_sigma_safe m]
```

```
    · intro _; unfold ssysConsistentB; simp [hn']
end

section
theorem ssys_cons_positivity (n m : ℕ) :
    (∃ k, SsysX k ⊆ SsysX n ∩ SsysX m) ↔ (SsysX n ∩ SsysX m).Nonempty := by
  constructor
  · intro ⟨k, hk⟩
    exact Set.Nonempty.mono hk (InS.nonempty (SsysX_mem k))
  · intro hne
    have hIn : InS (SsysX n ∩ SsysX m) :=
      (Ssys_isPositive (Ssys_mem.mpr (SsysX_mem n)) (Ssys_mem.mpr (SsysX_mem m))).2
    hne
    obtain ⟨k, hk⟩ := SsysX_surj hIn
    exact ⟨k, hk.subset⟩
end

section
theorem ssys_inter_nonempty_iff_consistent (n m : ℕ) :
    (SsysX n ∩ SsysX m).Nonempty ↔ consistentB (safeDecodeActive n) (safeDecodeActive
    m) = true := by
  rw [SsysX_eq_denote_safe, SsysX_eq_denote_safe, ← denote_cap, consistentB_iff]
end

section
theorem ssys_cons_iff (n m : ℕ) :
    (∃ k, SsysX k ⊆ SsysX n ∩ SsysX m) ↔
      consistentB (safeDecodeActive n) (safeDecodeActive m) = true := by
  rw [ssys_cons_positivity, ssys_inter_nonempty_iff_consistent]
end

section
theorem ssys_cons_char_iff (n m : ℕ) :
    ssysConsistentB n m = true ↔ ∃ k, SsysX k ⊆ SsysX n ∩ SsysX m := by
  rw [ssysConsistentB_iff, ssys_cons_iff]
end

section

instance decidableSsysCons (n m : ℕ) :
    Decidable (∃ k, SsysX k ⊆ SsysX n ∩ SsysX m) :=
  decidable_of_iff (ssysConsistentB n m = true) (ssys_cons_char_iff n m)
end

end Exercise722
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise722
section
set_option linter.unusedVariables false

theorem example_722_presentation_inst47 : ∀ (n m : Nat),
  Iff (@Eq Bool (DomainTheory.NeighbourhoodSystems.Exercise722.ssysConsistentB n m)
    Bool.true)
    (∃ (k : Nat),
      @LE.le (Set (List Bool)) (@Set.instLE (List Bool)) (DomainTheory.
    NeighbourhoodSystems.Exercise722.SsysX k)
```

```
        (@Inter.inter (Set (List Bool)) (@Set.instInter (List Bool))
          (DomainTheory.NeighbourhoodSystems.Exercise722.SsysX n)
          (DomainTheory.NeighbourhoodSystems.Exercise722.SsysX m))) :=
  DomainTheory.NeighbourhoodSystems.Exercise722.ssys_cons_char_iff
end

end DomainTheory.NeighbourhoodSystems.Exercise722
namespace DomainTheory.NeighbourhoodSystems
namespace Exercise722
open Set Domain.Recursive

section
set_option maxHeartbeats 5000000

class PartiallyEffectivelyGiven (V : NeighborhoodSystem α) : Prop where
  out : Nonempty (ConsistencyPresentation V)

theorem c9b5_encodeListBool_eq (σ : List Bool) :
    Domain.Recursive.c9b5_encodeListBool σ = encodeListBool σ := by
  unfold Domain.Recursive.c9b5_encodeListBool encodeListBool
  congr 1

theorem c9b5_sexprDepth_eq (e : SExpr) : Domain.Recursive.c9b5_sexprDepth e =
    sexprDepth e := by
  induction e with
  | sigma => rfl
  | single _ => rfl
  | cat a b iha ihb => simp [Domain.Recursive.c9b5_sexprDepth, sexprDepth, iha, ihb]
  | cap a b iha ihb => simp [Domain.Recursive.c9b5_sexprDepth, sexprDepth, iha, ihb]

theorem c9b5_sexprGodelEncode_eq (e : SExpr) :
    Domain.Recursive.c9b5_sexprGodelEncode e = SExpr.encode e := by
  induction e with
  | sigma => rfl
  | single σ => simp [Domain.Recursive.c9b5_sexprGodelEncode, SExpr.encode,
    c9b5_encodeListBool_eq]
  | cat a b iha ihb => simp [Domain.Recursive.c9b5_sexprGodelEncode, SExpr.encode, iha
    , ihb]
  | cap a b iha ihb => simp [Domain.Recursive.c9b5_sexprGodelEncode, SExpr.encode, iha
    , ihb]

theorem decodeFuel_depth_le {fuel c : ℕ} {e : SExpr} (h : decodeFuel fuel c = some e)
    :
    sexprDepth e ≤ fuel := by
  induction fuel generalizing c e with
  | zero => simp [decodeFuel] at h
  | succ fuel ih =>
    match tag : c.unpair.1 with
    | 0 =>
      by_cases hσ : c.unpair.2 = 0
      · rw [decodeFuel_succ_sigma fuel c tag hσ] at h
        simp only [Option.some.injEq] at h
        simp [← h, sexprDepth]
      · rw [decodeFuel_succ_not_sigma fuel c tag hσ] at h; simp at h
    | 1 =>
      rw [decodeFuel_succ_single fuel c tag] at h
```

```
      cases hb : decodeListBool c.unpair.2 with
      | none => simp [hb] at h
      | some σ =>
        rw [hb] at h
        simp only [Option.map_some, Option.some.injEq] at h
        simp [← h, sexprDepth]
    | 2 =>
      rw [decodeFuel_succ_cat fuel c tag] at h
      cases ha : decodeFuel fuel c.unpair.2.unpair.1 with
      | none => simp [ha] at h
      | some a =>
        cases hb : decodeFuel fuel c.unpair.2.unpair.2 with
        | none => simp [ha, hb] at h
        | some b =>
          simp only [ha, hb, Option.some.injEq] at h
          have hda := ih ha
          have hdb := ih hb
          simp only [← h, sexprDepth]
          omega
    | 3 =>
      rw [decodeFuel_succ_cap fuel c tag] at h
      cases ha : decodeFuel fuel c.unpair.2.unpair.1 with
      | none => simp [ha] at h
      | some a =>
        cases hb : decodeFuel fuel c.unpair.2.unpair.2 with
        | none => simp [ha, hb] at h
        | some b =>
          simp only [ha, hb, Option.some.injEq] at h
          have hda := ih ha
          have hdb := ih hb
          simp only [← h, sexprDepth]
          omega
    | _ + 4 =>
      rw [decodeFuel_succ_junk fuel c (by omega)] at h; simp at h

theorem natBool_eq_some_iff (n : ℕ) (b : Bool) : natBool n = some b ↔ n = boolNat b :=
     by
  match n with
  | 0 => cases b <;> simp [natBool, boolNat]
  | 1 => cases b <;> simp [natBool, boolNat]
  | n + 2 => cases b <;> simp [natBool, boolNat]

theorem mapM_natBool_eq_some (l : List ℕ) (σ : List Bool)
    (h : l.mapM natBool = some σ) : l = σ.map boolNat := by
  induction l generalizing σ with
  | nil => rw [List.mapM_nil] at h; simpa using h.symm
  | cons x xs ih =>
    rw [List.mapM_cons] at h
    cases hnx : natBool x with
    | none => simp [hnx] at h
    | some b =>
      cases htx : xs.mapM natBool with
      | none => simp [hnx, htx] at h
      | some ys =>
        simp only [hnx, htx] at h
        obtain rfl : σ = b :: ys := by simpa using h.symm
```

```
        simp [ih ys htx, (natBool_eq_some_iff x b).mp hnx]

theorem decodeListBool_eq_some (n : ℕ) (σ : List Bool) (h : decodeListBool n = some σ)
    :
    n = encodeListBool σ := by
  have hl : decodeList n = σ.map boolNat := mapM_natBool_eq_some (decodeList n) σ h
  calc n = encodeList (decodeList n) := (encodeList_decodeList n).symm
    _ = encodeList (σ.map boolNat) := by rw [hl]
    _ = encodeListBool σ := rfl

theorem decodeFuel_sound {fuel c : ℕ} {e : SExpr} (h : decodeFuel fuel c = some e) :
    c = SExpr.encode e := by
  induction fuel generalizing c e with
  | zero => simp [decodeFuel] at h
  | succ fuel ih =>
    match tag : c.unpair.1 with
    | 0 =>
      by_cases hσ : c.unpair.2 = 0
      · have hc : c = Nat.pair 0 0 := by
          have hpu := Nat.pair_unpair c; rw [tag, hσ] at hpu; exact hpu.symm
        rw [decodeFuel_succ_sigma fuel c tag hσ] at h
        simp only [Option.some.injEq] at h
        simp [SExpr.encode, ← h, hc]
      · rw [decodeFuel_succ_not_sigma fuel c tag hσ] at h; simp at h
    | 1 =>
      have hc1 : c = Nat.pair 1 c.unpair.2 := by
        have hpu := Nat.pair_unpair c; rw [tag] at hpu; exact hpu.symm
      rw [decodeFuel_succ_single fuel c tag] at h
      cases hb : decodeListBool c.unpair.2 with
      | none => simp [hb] at h
      | some σ =>
        rw [hb] at h
        simp only [Option.map_some, Option.some.injEq] at h
        have hσc : c.unpair.2 = encodeListBool σ := decodeListBool_eq_some c.unpair.2
    σ hb
        rw [← h, SExpr.encode, hc1, hσc]
    | 2 =>
      have hc2 : c = Nat.pair 2 c.unpair.2 := by
        have hpu := Nat.pair_unpair c; rw [tag] at hpu; exact hpu.symm
      rw [decodeFuel_succ_cat fuel c tag] at h
      cases ha : decodeFuel fuel c.unpair.2.unpair.1 with
      | none => simp [ha] at h
      | some a =>
        cases hb : decodeFuel fuel c.unpair.2.unpair.2 with
        | none => simp [ha, hb] at h
        | some b =>
          simp only [ha, hb, Option.some.injEq] at h
          have hac : c.unpair.2.unpair.1 = SExpr.encode a := ih ha
          have hbc : c.unpair.2.unpair.2 = SExpr.encode b := ih hb
          have hpc : c.unpair.2 = Nat.pair (SExpr.encode a) (SExpr.encode b) := by
            have hpu := Nat.pair_unpair c.unpair.2; rw [hac, hbc] at hpu; exact hpu.
    symm
          rw [← h, SExpr.encode, hc2, hpc]
    | 3 =>
      have hc3 : c = Nat.pair 3 c.unpair.2 := by
        have hpu := Nat.pair_unpair c; rw [tag] at hpu; exact hpu.symm
```

```
      rw [decodeFuel_succ_cap fuel c tag] at h
      cases ha : decodeFuel fuel c.unpair.2.unpair.1 with
      | none => simp [ha] at h
      | some a =>
        cases hb : decodeFuel fuel c.unpair.2.unpair.2 with
        | none => simp [ha, hb] at h
        | some b =>
          simp only [ha, hb, Option.some.injEq] at h
          have hac : c.unpair.2.unpair.1 = SExpr.encode a := ih ha
          have hbc : c.unpair.2.unpair.2 = SExpr.encode b := ih hb
          have hpc : c.unpair.2 = Nat.pair (SExpr.encode a) (SExpr.encode b) := by
            have hpu := Nat.pair_unpair c.unpair.2; rw [hac, hbc] at hpu; exact hpu.
    symm
          rw [← h, SExpr.encode, hc3, hpc]
    | _ + 4 =>
      rw [decodeFuel_succ_junk fuel c (by omega)] at h; simp at h

def ssysActiveChar (n : ℕ) : ℕ :=
  mulBit (decodeFuelOkChar (n.unpair.2 + 1) n.unpair.1)
    (decideNonemptyBChar (n.unpair.2 + 1) n.unpair.1)

theorem primrec_ssysActiveChar : Nat.Primrec ssysActiveChar := by
  have hpack : Nat.Primrec (fun n : ℕ => Nat.pair (n.unpair.2 + 1) n.unpair.1) :=
    Nat.Primrec.pair (primrec_add₂ Nat.Primrec.right (Nat.Primrec.const 1)) Nat.Primrec
    .left
  have h1 : Nat.Primrec (fun n => decodeFuelOkChar (n.unpair.2 + 1) n.unpair.1) :=
    (primrec_decodeFuelOkChar2.comp hpack).of_eq fun n => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have h2 : Nat.Primrec (fun n => decideNonemptyBChar (n.unpair.2 + 1) n.unpair.1) :=
    (primrec_decideNonemptyBChar2.comp hpack).of_eq fun n => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  exact (primrec_mulBit.comp (Nat.Primrec.pair h1 h2)).of_eq fun n => by
    simp only [unpair_pair_fst, unpair_pair_snd, ssysActiveChar]

theorem ssysActiveChar_eq_one_iff (n : ℕ) : ssysActiveChar n = 1 ↔ ssysActive n = true
    := by
  simp only [ssysActiveChar, ssysActive, SExpr.decode, mulBit_eq_one_iff,
    decodeFuelOkChar_eq_one_iff]


  cases hdec : decodeFuel (n.unpair.2 + 1) n.unpair.1 with
  | none => simp
  | some e =>
    have hc : n.unpair.1 = SExpr.encode e := decodeFuel_sound hdec
    have hdepth : Domain.Recursive.c9b5_sexprDepth e ≤ n.unpair.2 + 1 := by
      rw [c9b5_sexprDepth_eq]; exact decodeFuel_depth_le hdec
    simp only [Option.isSome_some, true_and]
    rw [hc, ← c9b5_sexprGodelEncode_eq, decideNonemptyBChar_eq_one_iff hdepth,
    decideNonemptyB_iff]

theorem ssysActiveChar_le_one (n : ℕ) : ssysActiveChar n ≤ 1 :=
  mulBit_le_one (decodeFuelOkChar_le_one _ _) (bExistsFn_le_one _ _ _)

theorem ssysActive_exists_decode {n : ℕ} (hn : ssysActive n = true) :
    ∃ e, SExpr.decode n = some e := by
  unfold ssysActive at hn
  cases hdec : SExpr.decode n with
```

```
  | none => simp [hdec] at hn
  | some e => exact ⟨e, rfl⟩

@[irreducible] def ssysCanonicalCode (n : ℕ) : ℕ :=
  Domain.Recursive.selectFn (ssysActiveChar n) n.unpair.1 (SExpr.encode .sigma)

def ssysConsChar (t : ℕ) : ℕ := boolNat (ssysConsistentB t.unpair.1 t.unpair.2)

theorem ssysConsChar_eq_one_iff (t : ℕ) :
    ssysConsChar t = 1 ↔ ssysConsistentB t.unpair.1 t.unpair.2 = true := by
  simp [ssysConsChar, boolNat_eq_one_iff]

theorem ssysConsChar_le_one (t : ℕ) : ssysConsChar t ≤ 1 := by
  have := boolNat_zero_one (ssysConsistentB t.unpair.1 t.unpair.2)
  unfold ssysConsChar
  omega

theorem ssysConsChar_zero_one (t : ℕ) : ssysConsChar t = 0 ∨ ssysConsChar t = 1 :=
  boolNat_zero_one _

def ssysConsistentBChar (n m : ℕ) : ℕ :=
  selectFn (mulBit (ssysActiveChar n) (ssysActiveChar m))
    (consistentBChar (n.unpair.2 + m.unpair.2 + 2) n.unpair.1 m.unpair.1)
    1

theorem primrec_ssysConsistentBChar :
    Nat.Primrec (fun t => ssysConsistentBChar t.unpair.1 t.unpair.2) := by
  have hcond : Nat.Primrec
      (fun t => mulBit (ssysActiveChar t.unpair.1) (ssysActiveChar t.unpair.2)) :=
    (primrec_mulBit.comp (Nat.Primrec.pair (primrec_ssysActiveChar.comp Nat.Primrec.
    left)
      (primrec_ssysActiveChar.comp Nat.Primrec.right))).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hfuel : Nat.Primrec (fun t : ℕ => t.unpair.1.unpair.2 + t.unpair.2.unpair.2 +
    2) :=
    primrec_add₂ (primrec_add₂ (Nat.Primrec.right.comp Nat.Primrec.left)
      (Nat.Primrec.right.comp Nat.Primrec.right)) (Nat.Primrec.const 2)
  have hpack : Nat.Primrec (fun t : ℕ => Nat.pair (t.unpair.1.unpair.2 + t.unpair.2.
    unpair.2 + 2)
      (Nat.pair t.unpair.1.unpair.1 t.unpair.2.unpair.1)) :=
    Nat.Primrec.pair hfuel (Nat.Primrec.pair (Nat.Primrec.left.comp Nat.Primrec.left)
      (Nat.Primrec.left.comp Nat.Primrec.right))
  have hcons : Nat.Primrec (fun t => consistentBChar
      (t.unpair.1.unpair.2 + t.unpair.2.unpair.2 + 2) t.unpair.1.unpair.1 t.unpair.2.
    unpair.1) :=
    (primrec_consistentBChar2.comp hpack).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  exact (primrec_selectFn hcond hcons (Nat.Primrec.const 1)).of_eq fun t => by
    simp only [ssysConsistentBChar]

theorem ssysConsistentBChar_eq_one_iff (n m : ℕ) :
    ssysConsistentBChar n m = 1 ↔ ssysConsistentB n m = true := by
  unfold ssysConsistentBChar ssysConsistentB
  by_cases hn : ssysActive n = true
  · by_cases hm : ssysActive m = true
    · have hnc : ssysActiveChar n = 1 := (ssysActiveChar_eq_one_iff n).mpr hn
```

```
      have hmc : ssysActiveChar m = 1 := (ssysActiveChar_eq_one_iff m).mpr hm
      obtain ⟨a, hdecn⟩ := ssysActive_exists_decode hn
      obtain ⟨b, hdecm⟩ := ssysActive_exists_decode hm
      have hac : n.unpair.1 = SExpr.encode a := decodeFuel_sound hdecn
      have hbc : m.unpair.1 = SExpr.encode b := decodeFuel_sound hdecm
      have hda : sexprDepth a ≤ n.unpair.2 + 1 := decodeFuel_depth_le hdecn
      have hdb : sexprDepth b ≤ m.unpair.2 + 1 := decodeFuel_depth_le hdecm
      have hfuel : Domain.Recursive.c9b5_sexprDepth (.cap a b) ≤ n.unpair.2 + m.unpair
    .2 + 2 := by
        rw [c9b5_sexprDepth_eq]
        simp only [sexprDepth]
        omega
      simp only [hnc, hmc, mulBit, mul_one, selectFn_one]
      rw [hac, hbc, ← c9b5_sexprGodelEncode_eq, ← c9b5_sexprGodelEncode_eq,
        consistentBChar_eq_one_iff hfuel]
    · have hnotinactive : (!ssysActive n || !ssysActive m) = false := by simp [hn, hm]
      rw [hnotinactive, ite_eq_right (by decide)]
      simp only [hdecn, hdecm]
      exact (consistentB_iff a b).symm
    · have hm0 : ssysActiveChar m = 0 := by
        have hle := ssysActiveChar_le_one m
        have hne : ssysActiveChar m = 1 := fun h => hm ((ssysActiveChar_eq_one_iff m).
    mp h)
        omega
      have hmf : ssysActive m = false := by
        cases hAm : ssysActive m with
        | false => rfl
        | true => exact absurd hAm hm
      simp only [hm0, mulBit, mul_zero, selectFn_zero, hmf, Bool.not_false, Bool.
    or_true, ite_true]
  · have hn0 : ssysActiveChar n = 0 := by
      have hle := ssysActiveChar_le_one n
      have hne : ssysActiveChar n = 1 := fun h => hn ((ssysActiveChar_eq_one_iff n).mp
     h)
      omega
    have hnf : ssysActive n = false := by
      cases hAn : ssysActive n with
      | false => rfl
      | true => exact absurd hAn hn
    simp only [hn0, mulBit, zero_mul, selectFn_zero, hnf, Bool.not_false, Bool.true_or
    , ite_true]

theorem ssysConsistentBChar_le_one (n m : ℕ) : ssysConsistentBChar n m ≤ 1 := by
  unfold ssysConsistentBChar
  rcases (show mulBit (ssysActiveChar n) (ssysActiveChar m) = 0 ∨
      mulBit (ssysActiveChar n) (ssysActiveChar m) = 1 by
    have h1 := ssysActiveChar_le_one n
    have h2 := ssysActiveChar_le_one m
    unfold mulBit
    rcases (show ssysActiveChar n = 0 ∨ ssysActiveChar n = 1 by omega) with hn | hn
    <;>
      rcases (show ssysActiveChar m = 0 ∨ ssysActiveChar m = 1 by omega) with hm | hm
    <;>
      simp [hn, hm]) with h0 | h1
  · rw [h0, selectFn_zero]
  · rw [h1, selectFn_one]; exact consistentBChar_le_one _ _ _
```

```
theorem ssysConsChar_eq_ssysConsistentBChar (t : ℕ) :
    ssysConsChar t = ssysConsistentBChar t.unpair.1 t.unpair.2 := by
  apply eq_of_le_one_iff_one (ssysConsChar_le_one t) (ssysConsistentBChar_le_one _ _)
  rw [ssysConsChar_eq_one_iff, ssysConsistentBChar_eq_one_iff]

theorem primrec_ssysConsChar : Nat.Primrec ssysConsChar :=
  (primrec_ssysConsistentBChar).of_eq fun t => (ssysConsChar_eq_ssysConsistentBChar t)
    .symm

def ssysInterEqChar (t : ℕ) : ℕ :=
  let n := t.unpair.1
  let m := t.unpair.2.unpair.1
  let k := t.unpair.2.unpair.2
  Domain.Recursive.interEqChar (n.unpair.2 + m.unpair.2 + k.unpair.2 + 3)
    (Domain.Recursive.capCode (ssysCanonicalCode n) (ssysCanonicalCode m)) (
    ssysCanonicalCode k)

theorem ssys_cons_char_eq_one_iff (n m : ℕ) :
    (∃ k, SsysX k ⊆ SsysX n ∩ SsysX m) ↔ ssysConsChar (Nat.pair n m) = 1 := by
  rw [ssysConsChar_eq_one_iff, ssys_cons_char_iff, unpair_pair_fst, unpair_pair_snd]

theorem Ssys_cons_computable_of_primrec_ssysConsChar (hf : Nat.Primrec ssysConsChar) :
    RecDecidable₂ (fun n m => ∃ k, SsysX k ⊆ SsysX n ∩ SsysX m) :=
  RecDecidable₂.of_paired_zero_one_char hf ssysConsChar_zero_one
    ssys_cons_char_eq_one_iff

theorem Ssys_cons_computable : RecDecidable₂ (fun n m => ∃ k, SsysX k ⊆ SsysX n ∩
    SsysX m) :=
  Ssys_cons_computable_of_primrec_ssysConsChar primrec_ssysConsChar

def SsysPres : ConsistencyPresentation Ssys where
  X := SsysX
  mem_X n := Ssys_mem.mpr (SsysX_mem n)
  surj hY := SsysX_surj (Ssys_mem.mp hY)
  cons_computable := Ssys_cons_computable

theorem c9b5_boolNat_eq (b : Bool) : Domain.Recursive.c9b5_boolNat b = boolNat b := by
  cases b <;> rfl

theorem ssysCanonicalCode_eq (n : ℕ) : ssysCanonicalCode n = SExpr.encode (
    safeDecodeActive n) := by
  unfold ssysCanonicalCode
  by_cases hn : ssysActive n = true
  · rw [(ssysActiveChar_eq_one_iff n).mpr hn, Domain.Recursive.selectFn_one]
    obtain ⟨e, hdec⟩ := ssysActive_exists_decode hn
    have hac : n.unpair.1 = SExpr.encode e := decodeFuel_sound hdec
    rw [hac]
    congr 1
    unfold safeDecodeActive
    rw [hdec]
    have : decideNonemptyB e = true := by
      unfold ssysActive at hn; rw [hdec] at hn; exact hn
    simp [this]
  · have hn0 : ssysActiveChar n = 0 := by
      have hle := ssysActiveChar_le_one n
```

```
      have hne : ssysActiveChar n = 1 := fun h => hn ((ssysActiveChar_eq_one_iff n).mp
     h)
      omega
    have hnf : ssysActive n = false := by
      cases hAn : ssysActive n with
      | false => rfl
      | true => exact absurd hAn hn
    rw [hn0, Domain.Recursive.selectFn_zero, safeDecodeActive_inactive n hnf]

theorem sexprDepth_safeDecodeActive_le (n : ℕ) : sexprDepth (safeDecodeActive n) ≤ n.
    unpair.2 + 1 := by
  by_cases hn : ssysActive n = true
  · obtain ⟨e, hdec⟩ := ssysActive_exists_decode hn
    have hda : sexprDepth e ≤ n.unpair.2 + 1 := decodeFuel_depth_le hdec
    have heq : safeDecodeActive n = e := by
      unfold safeDecodeActive
      rw [hdec]
      have : decideNonemptyB e = true := by
        unfold ssysActive at hn; rw [hdec] at hn; exact hn
      simp [this]
    rw [heq]; exact hda
  · have hnf : ssysActive n = false := by
      cases hAn : ssysActive n with
      | false => rfl
      | true => exact absurd hAn hn
    rw [safeDecodeActive_inactive n hnf]
    simp [sexprDepth]

theorem ssys_interEq_iff (n m k : ℕ) :
    SsysX n ∩ SsysX m = SsysX k ↔
      denote (.cap (safeDecodeActive n) (safeDecodeActive m)) = denote (
    safeDecodeActive k) := by
  rw [SsysX_eq_denote_safe, SsysX_eq_denote_safe, SsysX_eq_denote_safe, denote_cap]

theorem ssysInterEqChar_le_one (t : ℕ) : ssysInterEqChar t ≤ 1 := by
  unfold ssysInterEqChar
  exact Domain.Recursive.interEqChar_le_one _ _ _

theorem ssysInterEqChar_eq_one_iff (n m k : ℕ) :
    ssysInterEqChar (Nat.pair n (Nat.pair m k)) = 1 ↔ SsysX n ∩ SsysX m = SsysX k :=
    by
  unfold ssysInterEqChar
  simp only [unpair_pair_fst, unpair_pair_snd]
  rw [ssys_interEq_iff]
  have hfuel : n.unpair.2 + m.unpair.2 + k.unpair.2 + 3 ≥
      c9b5_sexprDepth (.cap (safeDecodeActive n) (safeDecodeActive m)) ∧
      n.unpair.2 + m.unpair.2 + k.unpair.2 + 3 ≥ c9b5_sexprDepth (safeDecodeActive k)
    := by
    rw [c9b5_sexprDepth_eq, c9b5_sexprDepth_eq]
    have hn := sexprDepth_safeDecodeActive_le n
    have hm := sexprDepth_safeDecodeActive_le m
    have hk := sexprDepth_safeDecodeActive_le k
    simp only [sexprDepth]
    omega
  rw [show Domain.Recursive.capCode (ssysCanonicalCode n) (ssysCanonicalCode m) =
      c9b5_sexprGodelEncode (.cap (safeDecodeActive n) (safeDecodeActive m)) from ?_,
```

```
    show ssysCanonicalCode k = c9b5_sexprGodelEncode (safeDecodeActive k) from ?_,
    Domain.Recursive.interEqChar_eq_one_iff hfuel.1 hfuel.2]
  · rw [c9b5_sexprGodelEncode_eq]; exact ssysCanonicalCode_eq k
  · unfold Domain.Recursive.capCode
    rw [ssysCanonicalCode_eq, ssysCanonicalCode_eq, ← c9b5_sexprGodelEncode_eq,
      ← c9b5_sexprGodelEncode_eq]
    rfl

theorem primrec_ssysInterEqChar : Nat.Primrec ssysInterEqChar := by
  have hn : Nat.Primrec (fun t : ℕ => t.unpair.1) := Nat.Primrec.left
  have hm : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hk : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hcanon : Nat.Primrec (fun n : ℕ => ssysCanonicalCode n) := by
    have := primrec_ssysActiveChar
    refine (Domain.Recursive.primrec_selectFn this Nat.Primrec.left
      (Nat.Primrec.const (SExpr.encode .sigma))).of_eq fun n => ?_
    unfold ssysCanonicalCode; rfl
  have hcn : Nat.Primrec (fun t : ℕ => ssysCanonicalCode t.unpair.1) := hcanon.comp hn
  have hcm : Nat.Primrec (fun t : ℕ => ssysCanonicalCode t.unpair.2.unpair.1) :=
    hcanon.comp hm
  have hck : Nat.Primrec (fun t : ℕ => ssysCanonicalCode t.unpair.2.unpair.2) :=
    hcanon.comp hk
  have hfuel : Nat.Primrec (fun t : ℕ =>
      t.unpair.1.unpair.2 + t.unpair.2.unpair.1.unpair.2 + t.unpair.2.unpair.2.unpair
    .2 + 3) :=
    Domain.Recursive.primrec_add₂
      (Domain.Recursive.primrec_add₂
        (Domain.Recursive.primrec_add₂
          (Nat.Primrec.right.comp hn) (Nat.Primrec.right.comp hm))
        (Nat.Primrec.right.comp hk))
      (Nat.Primrec.const 3)
  have hcap : Nat.Primrec (fun t : ℕ =>
      Domain.Recursive.capCode (ssysCanonicalCode t.unpair.1)
        (ssysCanonicalCode t.unpair.2.unpair.1)) := by
    have hp : Nat.Primrec (fun t : ℕ => Nat.pair 3 (Nat.pair (ssysCanonicalCode t.
    unpair.1)
        (ssysCanonicalCode t.unpair.2.unpair.1))) :=
      Nat.Primrec.pair (Nat.Primrec.const 3) (Nat.Primrec.pair hcn hcm)
    refine hp.of_eq fun t => ?_
    unfold Domain.Recursive.capCode; rfl
  have hpack : Nat.Primrec (fun t : ℕ => Nat.pair
      (t.unpair.1.unpair.2 + t.unpair.2.unpair.1.unpair.2 + t.unpair.2.unpair.2.unpair
    .2 + 3)
      (Nat.pair (Domain.Recursive.capCode (ssysCanonicalCode t.unpair.1)
          (ssysCanonicalCode t.unpair.2.unpair.1))
        (ssysCanonicalCode t.unpair.2.unpair.2))) :=
    Nat.Primrec.pair hfuel (Nat.Primrec.pair hcap hck)
  refine (Domain.Recursive.primrec_interEqChar.comp hpack).of_eq fun t => ?_
  unfold ssysInterEqChar
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem Ssys_interEq_computable :
    RecDecidable₃ (fun n m k => SsysX n ∩ SsysX m = SsysX k) :=
  RecDecidable₃.of_triple_zero_one_char primrec_ssysInterEqChar
```

```
    (fun t => by
      rcases (show ssysInterEqChar t = 0 ∨ ssysInterEqChar t = 1 from by
        have := ssysInterEqChar_le_one t; omega) with h | h <;> simp [h])
    (fun n m k => (ssysInterEqChar_eq_one_iff n m k).symm)

theorem Ssys_partially_effectively_given : PartiallyEffectivelyGiven Ssys := ⟨⟨SsysPres
    ⟩⟩

end

end Exercise722
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise722
section
set_option linter.unusedVariables false

theorem example_722_presentation : Domain.Recursive.RecDecidable₃ fun (n m k : Nat) =>
  @Eq (Set (List Bool))
    (@Inter.inter (Set (List Bool)) (@Set.instInter (List Bool)) (DomainTheory.
    NeighbourhoodSystems.Exercise722.SsysX n)
      (DomainTheory.NeighbourhoodSystems.Exercise722.SsysX m))
    (DomainTheory.NeighbourhoodSystems.Exercise722.SsysX k) :=
  DomainTheory.NeighbourhoodSystems.Exercise722.Ssys_interEq_computable
end

end DomainTheory.NeighbourhoodSystems.Exercise722
namespace DomainTheory.NeighbourhoodSystems
namespace Exercise718
open NeighborhoodSystem Domain.Recursive ApproximableMap

section
variable {α β : Type*}

namespace EffectiveIso

variable {V : NeighborhoodSystem α} {W : NeighborhoodSystem β}
  {P : ComputablePresentation V} {Q : ComputablePresentation W}

def toDomainIso (e : EffectiveIso P Q) : DomainIso V W where
  toFun := e.toMap.toElementMap
  invFun := e.invMap.toElementMap
  left_inv x := by
    rw [← toElementMap_comp, e.left_inv, toElementMap_idMap]
  right_inv y := by
    rw [← toElementMap_comp, e.right_inv, toElementMap_idMap]
  map_rel_iff' := by
    intro x y
    show e.toMap.toElementMap x ≤ e.toMap.toElementMap y ↔ x ≤ y
    refine ⟨fun h => ?_, fun h => e.toMap.toElementMap_mono h⟩
    have hmono := e.invMap.toElementMap_mono h
    rwa [← toElementMap_comp, ← toElementMap_comp, e.left_inv, toElementMap_idMap,
      toElementMap_idMap] at hmono

end EffectiveIso
end
```

```
section
variable {α β : Type*}

namespace EffectiveIso

variable {V : NeighborhoodSystem α} {W : NeighborhoodSystem β}
  {P : ComputablePresentation V} {Q : ComputablePresentation W}

end EffectiveIso

theorem EffectivelyIsomorphic.isomorphic {V : NeighborhoodSystem α} {W :
    NeighborhoodSystem β}
    {P : ComputablePresentation V} {Q : ComputablePresentation W}
    (h : EffectivelyIsomorphic P Q) : V ≅? W :=
  h.elim fun e => ⟨e.toDomainIso⟩

variable {V : NeighborhoodSystem α}

variable (P : ComputablePresentation V)

variable {P}

theorem iterSys_effectivelyIsomorphic_iterIter (P : ComputablePresentation V) :
    EffectivelyIsomorphic (iterPresentation P) (iterPresentation (iterPresentation P))
     :=
  ⟨iterIterEffectiveIso P⟩

theorem iterSys_isomorphic_iterIter (P : ComputablePresentation V) :
    iterSys V ≅? iterSys (iterSys V) :=
  (iterSys_effectivelyIsomorphic_iterIter P).isomorphic
end

end Exercise718
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise718
section
set_option linter.unusedVariables false

theorem example_718.{u_1} : ∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V),
  @DomainTheory.NeighbourhoodSystems.Exercise718.EffectivelyIsomorphic (Prod Nat α) (
    Prod Nat (Prod Nat α))
    (@DomainTheory.NeighbourhoodSystems.iterSys α V)
    (@DomainTheory.NeighbourhoodSystems.iterSys (Prod Nat α) (@DomainTheory.
    NeighbourhoodSystems.iterSys α V))
    (@DomainTheory.NeighbourhoodSystems.iterPresentation α V P)
    (@DomainTheory.NeighbourhoodSystems.iterPresentation (Prod Nat α) (@DomainTheory.
    NeighbourhoodSystems.iterSys α V)
      (@DomainTheory.NeighbourhoodSystems.iterPresentation α V P)) :=
  @DomainTheory.NeighbourhoodSystems.Exercise718.
    iterSys_effectivelyIsomorphic_iterIter
end

end DomainTheory.NeighbourhoodSystems.Exercise718
end
```

THEOREM 7.6. For any effectively given domain $\mathcal{D}$, the combinator $\mathrm{fix} : (\mathcal{D} \to \mathcal{D}) \to \mathcal{D}$ is computable.

Proof : Referring back to the proof of Theorem 4.2 and thinking of

$$\mathcal{D} = \{X_n \mid n \in \mathbb{N}\}$$

as effectively given, fix as a relation comes down to

$$\bigcap_{i<q}[X_{n_i}, X_{m_i}] \text{ fix } X_\ell \text{ iff for some finite sequence}$$

$$\Delta = X_{k_0}, \ldots, X_{k_p} = X_\ell,$$

we have, for each $j < p$,

$$\bigcap\{X_{m_i} \mid X_{k_j} \subseteq X_{n_i}\} \subseteq X_{k_{j+1}}.$$

Inside the "for some finite sequence" all the checks are decidable by assumption on D. But the existential quantification of a decidable predicate always gives a recursively enumerable predicate. (And, as there is no implied bound on the size of the finite sequence we are looking for, this really *is* an enumerable set and not generally a recursive set.) □

The major consequence of what we have done up to this point concerns typed λ-calculus. Any expression involving only *effectively given types* and, perhaps, some *basic computable constants* using only the $\lambda, !$-notation defines a computable function of its free variables. And such functions applied to computable arguments give computable values. And such functions have computable least fixed points. Etc., etc. In a definite sense then we have in the "metalanguage", as people say, a quite precise and fully *mathematical programming language* for defining computable operators. It is not a machine implemented language, but it is a mathematically well-defined and easy-to-use language. And when we combine the usual type-definition facility together with *domain equations*, we have an especially powerful language.

3.8.8 Proposition 7.7 — lists effectively given

Proposition_7_7.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_21

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}
namespace Proposition77

def Vsharp (D : NeighborhoodSystem α) (P : ComputablePresentation D) :
    ℕ → Set (List Bool × α)
```

```
  | 0 => Gamma D
  | (k + 1) =>
      if (k + 1) % 2 = 1 then
        embZero (P.X (k / 2))
      else
        embPair (Vsharp D P ((k - 1) / 2).unpair.1) (Vsharp D P ((k - 1) / 2).unpair
    .2)
  termination_by k => k
  decreasing_by
    · have := unpair_fst_le ((k - 1) / 2); omega
    · have := unpair_snd_le ((k - 1) / 2); omega

end Proposition77
end

section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}

namespace Proposition77

variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)

theorem Vsharp_succ (k : ℕ) :
    Vsharp D P (k + 1) =
      if (k + 1) % 2 = 1 then embZero (P.X (k / 2))
      else embPair (Vsharp D P ((k - 1) / 2).unpair.1) (Vsharp D P ((k - 1) / 2).
    unpair.2) := by
  rw [Vsharp]

theorem Vsharp_even (n : ℕ) :
    Vsharp D P (2 * n + 2) = embPair (Vsharp D P n.unpair.1) (Vsharp D P n.unpair.2)
    := by
  rw [show 2 * n + 2 = (2 * n + 1) + 1 from rfl, Vsharp_succ, ite_eq_right (by omega),
    show (2 * n + 1 - 1) / 2 = n from by omega]

theorem Vsharp_even_inter_even (a b : ℕ) :
    Vsharp D P (2 * a + 2) ∩ Vsharp D P (2 * b + 2)
      = embPair (Vsharp D P a.unpair.1 ∩ Vsharp D P b.unpair.1)
                (Vsharp D P a.unpair.2 ∩ Vsharp D P b.unpair.2) := by
  rw [Vsharp_even, Vsharp_even, embPair_inter]

theorem Vsharp_odd (n : ℕ) : Vsharp D P (2 * n + 1) = embZero (P.X n) := by
  rw [Vsharp_succ, ite_eq_left (by omega), show 2 * n / 2 = n from by omega]

theorem Vsharp_odd_inter_even (a b : ℕ) :
    Vsharp D P (2 * a + 1) ∩ Vsharp D P (2 * b + 2) = ∅ := by
  rw [Vsharp_odd, Vsharp_even, embZero_inter_embPair]

theorem Vsharp_even_inter_odd (a b : ℕ) :
    Vsharp D P (2 * a + 2) ∩ Vsharp D P (2 * b + 1) = ∅ := by
  rw [Set.inter_comm]; exact Vsharp_odd_inter_even P b a

theorem Vsharp_odd_inter_odd (a b : ℕ) :
    Vsharp D P (2 * a + 1) ∩ Vsharp D P (2 * b + 1) = embZero (P.X a ∩ P.X b) := by
  rw [Vsharp_odd, Vsharp_odd, embZero_inter]
```

```
theorem Vsharp_zero : Vsharp D P 0 = Gamma D := by rw [Vsharp]

theorem Vsharp_eq_Gamma_iff (hD : ∀ X, D.mem X → X.Nonempty) (j : ℕ) :
    Vsharp D P j = Gamma D ↔ j = 0 := by
  constructor
  · intro h
    rcases nat_shape j with rfl | ⟨a, rfl⟩ | ⟨a, rfl⟩
    · rfl
    · rw [Vsharp_odd] at h; exact absurd h (embZero_ne_Gamma D hD (P.X a))
    · rw [Vsharp_even] at h; exact absurd h (embPair_ne_Gamma D hD _ _)
  · rintro rfl; exact Vsharp_zero P

theorem Vsharp_mem (k : ℕ) : MemS D (Vsharp D P k) := by
  induction k using Nat.strong_induction_on with
  | _ k ih =>
    rcases Nat.eq_zero_or_pos k with rfl | hk
    · rw [Vsharp_zero]; exact MemS.gamma
    ·
      rcases (by
        rcases Nat.lt_or_ge (k % 2) 1 with h | h
        · exact Or.inr ⟨k / 2 - 1, by omega⟩
        · exact Or.inl ⟨k / 2, by omega⟩ :
          (∃ n, k = 2 * n + 1) ∨ (∃ n, k = 2 * n + 2)) with ⟨n, rfl⟩ | ⟨n, rfl⟩
      · rw [Vsharp_odd]; exact MemS.zero (P.mem_X n)
      · rw [Vsharp_even]
        exact MemS.pair (ih _ (by have := unpair_fst_le n; omega))
          (ih _ (by have := unpair_snd_le n; omega))

theorem Vsharp_inter_zero (n : ℕ) : Vsharp D P n ∩ Vsharp D P 0 = Vsharp D P n := by
  rw [Vsharp_zero, Set.inter_eq_left]; exact memS_subset_gamma (Vsharp_mem P n)

theorem Vsharp_nonempty (hD : ∀ X, D.mem X → X.Nonempty) (k : ℕ) : (Vsharp D P k).
    Nonempty :=
  memS_nonempty hD (Vsharp_mem P k)

theorem Vsharp_surj {W : Set (List Bool × α)} (hW : MemS D W) : ∃ k, Vsharp D P k = W
    := by
  induction hW with
  | gamma => exact ⟨0, Vsharp_zero P⟩
  | @zero X hX => obtain ⟨n, hn⟩ := P.surj hX; exact ⟨2 * n + 1, by rw [Vsharp_odd, hn]⟩
  | @pair Pp Qq _ _ ihP ihQ =>
      obtain ⟨a, ha⟩ := ihP
      obtain ⟨b, hb⟩ := ihQ
      refine ⟨2 * Nat.pair a b + 2, ?_⟩
      have h1 : (Nat.pair a b).unpair.1 = a := by rw [unpair_pair]
      have h2 : (Nat.pair a b).unpair.2 = b := by rw [unpair_pair]
      rw [Vsharp_even, h1, h2, ha, hb]

theorem Vsharp_zero_inter (m : ℕ) : Vsharp D P 0 ∩ Vsharp D P m = Vsharp D P m := by
  rw [Vsharp_zero, Set.inter_eq_right]; exact memS_subset_gamma (Vsharp_mem P m)

theorem exists_sub_embPair_iff (hD : ∀ X, D.mem X → X.Nonempty)
    (A B : Set (List Bool × α)) :
    (∃ l, Vsharp D P l ⊆ embPair A B) ↔
      (∃ l, Vsharp D P l ⊆ A) ∧ (∃ l, Vsharp D P l ⊆ B) := by
```

```
  constructor
  · rintro ⟨l, hl⟩
    obtain ⟨Pp, Qq, hP, hQ, hWeq⟩ := memS_sub_embPair hD (Vsharp_mem P l) hl
    rw [hWeq] at hl
    obtain ⟨hPA, hQB⟩ := embPair_subset.mp hl
    obtain ⟨l1, h1⟩ := Vsharp_surj P hP
    obtain ⟨l2, h2⟩ := Vsharp_surj P hQ
    exact ⟨⟨l1, h1 ▶ hPA⟩, ⟨l2, h2 ▶ hQB⟩⟩
  · rintro ⟨⟨l1, h1⟩, ⟨l2, h2⟩⟩
    obtain ⟨l, hl⟩ := Vsharp_surj P (MemS.pair (Vsharp_mem P l1) (Vsharp_mem P l2))
    exact ⟨l, by rw [hl]; exact embPair_subset.mpr ⟨h1, h2⟩⟩

theorem exists_sub_embZero_iff (hD : ∀ X, D.mem X → X.Nonempty) (Y : Set α) :
    (∃ l, Vsharp D P l ⊆ embZero Y) ↔ ∃ k, P.X k ⊆ Y := by
  constructor
  · rintro ⟨l, hl⟩
    obtain ⟨Z, hZ, hWZ⟩ := memS_sub_embZero hD (Vsharp_mem P l) hl
    rw [hWZ] at hl
    obtain ⟨k, hk⟩ := P.surj hZ
    exact ⟨k, hk ▶ embZero_subset.mp hl⟩
  · rintro ⟨k, hk⟩
    exact ⟨2 * k + 1, by rw [Vsharp_odd]; exact embZero_subset.mpr hk⟩

end Proposition77
end

section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}

namespace Proposition77

variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)

variable (fcons feq finter : ℕ → ℕ)

theorem dsharp_decider_spec (hD : ∀ X, D.mem X → X.Nonempty)
    (hcons : ∀ a b, fcons (Nat.pair a b) = 1 ↔ ∃ l, P.X l ⊆ P.X a ∩ P.X b)
    (heq : ∀ a b, feq (Nat.pair a b) = 1 ↔ P.X a = P.X b)
    (hinter : ∀ a b, (∃ l, P.X l ⊆ P.X a ∩ P.X b) → P.X (finter (Nat.pair a b)) = P.X
    a ∩ P.X b) :
    ∀ i j : ℕ,
      (consB (gOf (dsharpStep fcons feq finter) (Nat.pair i j)) = 1
          ↔ ∃ l, Vsharp D P l ⊆ Vsharp D P i ∩ Vsharp D P j) ∧
        ((∃ l, Vsharp D P l ⊆ Vsharp D P i ∩ Vsharp D P j) →
          Vsharp D P (intI (gOf (dsharpStep fcons feq finter) (Nat.pair i j)))
            = Vsharp D P i ∩ Vsharp D P j) ∧
        (eqB (gOf (dsharpStep fcons feq finter) (Nat.pair i j)) = 1
          ↔ Vsharp D P i = Vsharp D P j) := by
  have key : ∀ w : ℕ, ∀ i j : ℕ, Nat.pair i j = w →
      (consB (gOf (dsharpStep fcons feq finter) (Nat.pair i j)) = 1
          ↔ ∃ l, Vsharp D P l ⊆ Vsharp D P i ∩ Vsharp D P j) ∧
        ((∃ l, Vsharp D P l ⊆ Vsharp D P i ∩ Vsharp D P j) →
          Vsharp D P (intI (gOf (dsharpStep fcons feq finter) (Nat.pair i j)))
            = Vsharp D P i ∩ Vsharp D P j) ∧
        (eqB (gOf (dsharpStep fcons feq finter) (Nat.pair i j)) = 1
```

```
      ↔ Vsharp D P i = Vsharp D P j) := by
intro w
induction w using Nat.strong_induction_on with
| _ w ih =>
  intro i j hw
  rcases nat_shape i with rfl | ⟨a, rfl⟩ | ⟨a, rfl⟩
  ·
    simp only [gOf_def]
    rw [dsharpStep_i0 fcons feq finter j]
    simp only [eqB_packT, consB_packT, intI_packT]
    refine ⟨?_, ?_, ?_⟩
    · exact ⟨fun _ => ⟨j, (Vsharp_zero_inter P j).ge⟩, fun _ => trivial⟩
    · intro _; rw [Vsharp_zero_inter P]
    · constructor
      · intro h
        have hj : j = 0 := by omega
        rw [hj]
      · intro h
        have hj : j = 0 := (Vsharp_eq_Gamma_iff P hD j).mp (h.symm.trans (
Vsharp_zero P))
        omega
  ·
    rcases nat_shape j with rfl | ⟨b, rfl⟩ | ⟨b, rfl⟩
    ·
      simp only [gOf_def]
      rw [dsharpStep_j0 fcons feq finter _ (by omega : 2 * a + 1 = 0)]
      simp only [eqB_packT, consB_packT, intI_packT]
      refine ⟨?_, ?_, ?_⟩
      · exact ⟨fun _ => ⟨2 * a + 1, (Vsharp_inter_zero P (2 * a + 1)).ge⟩, fun _ =>
trivial⟩
      · intro _; exact (Vsharp_inter_zero P (2 * a + 1)).symm
      · rw [Vsharp_zero P, Vsharp_eq_Gamma_iff P hD]; omega
    ·
      simp only [gOf_def]
      rw [dsharpStep_ll fcons feq finter a b]
      simp only [eqB_packT, consB_packT, intI_packT]
      refine ⟨?_, ?_, ?_⟩
      · rw [Vsharp_odd_inter_odd P, exists_sub_embZero_iff P hD]; exact hcons a b
      · intro hp
        rw [Vsharp_odd_inter_odd P] at hp ⊢
        rw [exists_sub_embZero_iff P hD] at hp
        rw [Vsharp_odd P, hinter a b hp]
      · rw [Vsharp_odd P, Vsharp_odd P, heq a b]
        exact ⟨fun h => by rw [h], fun h => embZero_injective h⟩
    ·
      simp only [gOf_def]
      rw [dsharpStep_ln fcons feq finter a b]
      simp only [eqB_packT, consB_packT, intI_packT]
      refine ⟨?_, ?_, ?_⟩
      · rw [Vsharp_odd_inter_even P]
        constructor
        · intro h; exact absurd h (by decide)
        · rintro ⟨l, hl⟩
          obtain ⟨x, hx⟩ := Vsharp_nonempty P hD l
          exact absurd (hl hx) (by simp)
      · rw [Vsharp_odd_inter_even P]
```

```
        rintro ⟨l, hl⟩
        obtain ⟨x, hx⟩ := Vsharp_nonempty P hD l
        exact absurd (hl hx) (by simp)
      · rw [Vsharp_odd P, Vsharp_even P]
        constructor
        · intro h; exact absurd h (by decide)
        · intro h; exact absurd h (embZero_ne_embPair D hD (P.mem_X a) _ _)
  .
    rcases nat_shape j with rfl | ⟨b, rfl⟩ | ⟨b, rfl⟩
    .
      simp only [gOf_def]
      rw [dsharpStep_j0 fcons feq finter _ (by omega : 2 * a + 2 = 0)]
      simp only [eqB_packT, consB_packT, intI_packT]
      refine ⟨?_, ?_, ?_⟩
      · exact ⟨fun _ => ⟨2 * a + 2, (Vsharp_inter_zero P (2 * a + 2)).ge⟩, fun _ =>
trivial⟩
      · intro _; exact (Vsharp_inter_zero P (2 * a + 2)).symm
      · rw [Vsharp_zero P, Vsharp_eq_Gamma_iff P hD]; omega
    .
      simp only [gOf_def]
      rw [dsharpStep_nl fcons feq finter a b]
      simp only [eqB_packT, consB_packT, intI_packT]
      refine ⟨?_, ?_, ?_⟩
      · rw [Vsharp_even_inter_odd P]
        constructor
        · intro h; exact absurd h (by decide)
        · rintro ⟨l, hl⟩
          obtain ⟨x, hx⟩ := Vsharp_nonempty P hD l
          exact absurd (hl hx) (by simp)
      · rw [Vsharp_even_inter_odd P]
        rintro ⟨l, hl⟩
        obtain ⟨x, hx⟩ := Vsharp_nonempty P hD l
        exact absurd (hl hx) (by simp)
      · rw [Vsharp_even P, Vsharp_odd P]
        constructor
        · intro h; exact absurd h (by decide)
        · intro h; exact absurd h.symm (embZero_ne_embPair D hD (P.mem_X b) _ _)
    .
      have hlt1 : Nat.pair a.unpair.1 b.unpair.1 < Nat.pair (2 * a + 2) (2 * b +
2) :=
        pair_lt_pair_of_lt (by have := unpair_fst_le a; omega) (by have :=
unpair_fst_le b; omega)
      have hlt2 : Nat.pair a.unpair.2 b.unpair.2 < Nat.pair (2 * a + 2) (2 * b +
2) :=
        pair_lt_pair_of_lt (by have := unpair_snd_le a; omega) (by have :=
unpair_snd_le b; omega)
      have hr1 := listGet_rtbl (dsharpStep fcons feq finter) hlt1
      have hr2 := listGet_rtbl (dsharpStep fcons feq finter) hlt2
      obtain ⟨ihc1, ihi1, ihe1⟩ :=
        ih (Nat.pair a.unpair.1 b.unpair.1) (hw ▶ hlt1) a.unpair.1 b.unpair.1 rfl
      obtain ⟨ihc2, ihi2, ihe2⟩ :=
        ih (Nat.pair a.unpair.2 b.unpair.2) (hw ▶ hlt2) a.unpair.2 b.unpair.2 rfl
      simp only [gOf_def]
      rw [dsharpStep_nn fcons feq finter a b]
      simp only [eqB_packT, consB_packT, intI_packT]
      rw [hr1, hr2]
```

```
          refine ⟨?_, ?_, ?_⟩
          · rw [Vsharp_even_inter_even P, exists_sub_embPair_iff P hD, nat_mul_eq_one]
            exact and_congr ihc1 ihc2
          · intro hp
            rw [Vsharp_even_inter_even P] at hp ⊢
            rw [exists_sub_embPair_iff P hD] at hp
            obtain ⟨hp1, hp2⟩ := hp
            rw [Vsharp_even P]
            simp only [unpair_pair_fst, unpair_pair_snd]
            rw [ihi1 hp1, ihi2 hp2]
          · rw [Vsharp_even P, Vsharp_even P, nat_mul_eq_one, ihe1, ihe2]
            constructor
            · rintro ⟨h1, h2⟩; rw [h1, h2]
            · intro h; exact embPair_injective h
  intro i j
  exact key (Nat.pair i j) i j rfl

theorem dsharp_intI_correct (hD : ∀ X, D.mem X → X.Nonempty)
    (hinter : ∀ a b, (∃ l, P.X l ⊆ P.X a ∩ P.X b) → P.X (finter (Nat.pair a b)) = P.X
     a ∩ P.X b) :
    ∀ i j : ℕ, (∃ l, Vsharp D P l ⊆ Vsharp D P i ∩ Vsharp D P j) →
      Vsharp D P (intI (gOf (dsharpStep fcons feq finter) (Nat.pair i j)))
        = Vsharp D P i ∩ Vsharp D P j := by
  have key : ∀ w : ℕ, ∀ i j : ℕ, Nat.pair i j = w →
      (∃ l, Vsharp D P l ⊆ Vsharp D P i ∩ Vsharp D P j) →
      Vsharp D P (intI (gOf (dsharpStep fcons feq finter) (Nat.pair i j)))
        = Vsharp D P i ∩ Vsharp D P j := by
    intro w
    induction w using Nat.strong_induction_on with
    | _ w ih =>
      intro i j hw
      rcases nat_shape i with rfl | ⟨a, rfl⟩ | ⟨a, rfl⟩
      · intro _
        simp only [gOf_def]; rw [dsharpStep_i0 fcons feq finter j]
        simp only [intI_packT]; rw [Vsharp_zero_inter P]
      · rcases nat_shape j with rfl | ⟨b, rfl⟩ | ⟨b, rfl⟩
        · intro _
          simp only [gOf_def]; rw [dsharpStep_j0 fcons feq finter _ (by omega : 2 * a
   + 1 = 0)]
          simp only [intI_packT]; exact (Vsharp_inter_zero P (2 * a + 1)).symm
        · intro hp
          simp only [gOf_def]; rw [dsharpStep_ll fcons feq finter a b]
          simp only [intI_packT]
          rw [Vsharp_odd_inter_odd P] at hp ⊢
          rw [exists_sub_embZero_iff P hD] at hp
          rw [Vsharp_odd P, hinter a b hp]
        · intro hp
          exfalso
          rw [Vsharp_odd_inter_even P] at hp
          obtain ⟨l, hl⟩ := hp
          obtain ⟨x, hx⟩ := Vsharp_nonempty P hD l
          exact absurd (hl hx) (by simp)
      · rcases nat_shape j with rfl | ⟨b, rfl⟩ | ⟨b, rfl⟩
        · intro _
          simp only [gOf_def]; rw [dsharpStep_j0 fcons feq finter _ (by omega : 2 * a
   + 2 = 0)]
```

```
          simp only [intI_packT]; exact (Vsharp_inter_zero P (2 * a + 2)).symm
        · intro hp
          exfalso
          rw [Vsharp_even_inter_odd P] at hp
          obtain ⟨l, hl⟩ := hp
          obtain ⟨x, hx⟩ := Vsharp_nonempty P hD l
          exact absurd (hl hx) (by simp)
        · intro hp
          have hlt1 : Nat.pair a.unpair.1 b.unpair.1 < Nat.pair (2 * a + 2) (2 * b +
    2) :=
            pair_lt_pair_of_lt (by have := unpair_fst_le a; omega) (by have :=
    unpair_fst_le b; omega)
          have hlt2 : Nat.pair a.unpair.2 b.unpair.2 < Nat.pair (2 * a + 2) (2 * b +
    2) :=
            pair_lt_pair_of_lt (by have := unpair_snd_le a; omega) (by have :=
    unpair_snd_le b; omega)
          have hr1 := listGet_rtbl (dsharpStep fcons feq finter) hlt1
          have hr2 := listGet_rtbl (dsharpStep fcons feq finter) hlt2
          rw [Vsharp_even_inter_even P] at hp ⊢
          rw [exists_sub_embPair_iff P hD] at hp
          obtain ⟨hp1, hp2⟩ := hp
          simp only [gOf_def]; rw [dsharpStep_nn fcons feq finter a b]
          simp only [intI_packT]; rw [hr1, hr2, Vsharp_even P]
          simp only [unpair_pair_fst, unpair_pair_snd]
          rw [ih _ (hw ▶ hlt1) a.unpair.1 b.unpair.1 rfl hp1,
              ih _ (hw ▶ hlt2) a.unpair.2 b.unpair.2 rfl hp2]
  intro i j; exact key (Nat.pair i j) i j rfl

theorem dsharp_interEq_iff (hD : ∀ X, D.mem X → X.Nonempty)
    (hcons : ∀ a b, fcons (Nat.pair a b) = 1 ↔ ∃ l, P.X l ⊆ P.X a ∩ P.X b)
    (heq : ∀ a b, feq (Nat.pair a b) = 1 ↔ P.X a = P.X b)
    (hinter : ∀ a b, (∃ l, P.X l ⊆ P.X a ∩ P.X b) → P.X (finter (Nat.pair a b)) = P.X
     a ∩ P.X b)
    (n m k : ℕ) :
    (Vsharp D P n ∩ Vsharp D P m = Vsharp D P k) ↔
      consB (gOf (dsharpStep fcons feq finter) (Nat.pair n m))
        * eqB (gOf (dsharpStep fcons feq finter)
            (Nat.pair (intI (gOf (dsharpStep fcons feq finter) (Nat.pair n m))) k)) =
    1 := by
  obtain ⟨hc0, hi0, _⟩ := dsharp_decider_spec P fcons feq finter hD hcons heq hinter n
    m
  obtain ⟨_, _, he⟩ := dsharp_decider_spec P fcons feq finter hD hcons heq hinter
    (intI (gOf (dsharpStep fcons feq finter) (Nat.pair n m))) k
  rw [nat_mul_eq_one]
  constructor
  · intro hEq
    have hch : ∃ l, Vsharp D P l ⊆ Vsharp D P n ∩ Vsharp D P m := ⟨k, hEq.ge⟩
    exact ⟨hc0.mpr hch, he.mpr ((hi0 hch).trans hEq)⟩
  · rintro ⟨hcb, heb⟩
    rw [← hi0 (hc0.mp hcb)]; exact he.mp heb

def dsharpPresentation (hD : ∀ X, D.mem X → X.Nonempty) :
    ComputablePresentation (Dsharp D hD) where
  X := Vsharp D P
  mem_X := fun n => Vsharp_mem P n
  surj := fun hY => Vsharp_surj P hY
```

```
interEq_computable := by
  obtain ⟨fc, hfc_pr, hfc⟩ := P.cons_computable
  obtain ⟨fe, hfe_pr, hfe⟩ := P.eq_computable
  have hcons : ∀ a b, fc (Nat.pair a b) = 1 ↔ ∃ l, P.X l ⊆ P.X a ∩ P.X b := fun a b
   => by
    have := hfc (Nat.pair a b); simp only [unpair_pair_fst, unpair_pair_snd] at this
  ; exact this.symm
  have heq : ∀ a b, fe (Nat.pair a b) = 1 ↔ P.X a = P.X b := fun a b => by
    have := hfe (Nat.pair a b); simp only [unpair_pair_fst, unpair_pair_snd] at this
  ; exact this.symm
  have hinter : ∀ a b, (∃ l, P.X l ⊆ P.X a ∩ P.X b) →
      P.X ((fun s => P.inter s.unpair.1 s.unpair.2) (Nat.pair a b)) = P.X a ∩ P.X b
  := fun a b h => by
    simp only [unpair_pair_fst, unpair_pair_snd]; exact P.inter_spec h
  refine ⟨fun t => consB (gOf (dsharpStep fc fe (fun s => P.inter s.unpair.1 s.unpair
  .2))
      (Nat.pair t.unpair.1 t.unpair.2.unpair.1))
      * eqB (gOf (dsharpStep fc fe (fun s => P.inter s.unpair.1 s.unpair.2))
          (Nat.pair (intI (gOf (dsharpStep fc fe (fun s => P.inter s.unpair.1 s.
  unpair.2))
            (Nat.pair t.unpair.1 t.unpair.2.unpair.1))) t.unpair.2.unpair.2)), ?_,
  fun t => ?_⟩

  · have hg := primrec_gOf (primrec_dsharpStep fc fe (fun s => P.inter s.unpair.1 s.
  unpair.2)
      hfc_pr hfe_pr P.inter_primrec)
    have hc0 := hg.comp (Nat.Primrec.left.pair (Nat.Primrec.left.comp Nat.Primrec.
  right))
    exact primrec_mul₂ ((Nat.Primrec.left.comp Nat.Primrec.right).comp hc0)
      (Nat.Primrec.left.comp (hg.comp
        (((Nat.Primrec.right.comp Nat.Primrec.right).comp hc0).pair
          (Nat.Primrec.right.comp Nat.Primrec.right))))
  · exact dsharp_interEq_iff P fc fe (fun s => P.inter s.unpair.1 s.unpair.2) hD
  hcons heq hinter
      t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair.2
cons_computable := by
  obtain ⟨fc, hfc_pr, hfc⟩ := P.cons_computable
  obtain ⟨fe, hfe_pr, hfe⟩ := P.eq_computable
  have hcons : ∀ a b, fc (Nat.pair a b) = 1 ↔ ∃ l, P.X l ⊆ P.X a ∩ P.X b := fun a b
   => by
    have := hfc (Nat.pair a b); simp only [unpair_pair_fst, unpair_pair_snd] at this
  ; exact this.symm
  have heq : ∀ a b, fe (Nat.pair a b) = 1 ↔ P.X a = P.X b := fun a b => by
    have := hfe (Nat.pair a b); simp only [unpair_pair_fst, unpair_pair_snd] at this
  ; exact this.symm
  have hinter : ∀ a b, (∃ l, P.X l ⊆ P.X a ∩ P.X b) →
      P.X ((fun s => P.inter s.unpair.1 s.unpair.2) (Nat.pair a b)) = P.X a ∩ P.X b
  := fun a b h => by
    simp only [unpair_pair_fst, unpair_pair_snd]; exact P.inter_spec h
  refine ⟨fun t => consB (gOf (dsharpStep fc fe (fun s => P.inter s.unpair.1 s.unpair
  .2))
      (Nat.pair t.unpair.1 t.unpair.2)), ?_, fun t => ?_⟩
  · have hg := primrec_gOf (primrec_dsharpStep fc fe (fun s => P.inter s.unpair.1 s.
  unpair.2)
      hfc_pr hfe_pr P.inter_primrec)
    exact (Nat.Primrec.left.comp Nat.Primrec.right).comp
```

```
        (hg.comp (Nat.Primrec.left.pair Nat.Primrec.right))
    · exact (dsharp_decider_spec P fc fe (fun s => P.inter s.unpair.1 s.unpair.2) hD
    hcons heq hinter
        t.unpair.1 t.unpair.2).1.symm
  inter := fun n m => intI (gOf (dsharpStep (fun _ => 0) (fun _ => 0)
    (fun s => P.inter s.unpair.1 s.unpair.2)) (Nat.pair n m))
  inter_primrec := by
    have hg := primrec_gOf (primrec_dsharpStep (fun _ => 0) (fun _ => 0)
      (fun s => P.inter s.unpair.1 s.unpair.2) (Nat.Primrec.const 0) (Nat.Primrec.
    const 0)
      P.inter_primrec)
    have hpair : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.1 t.unpair.2) :=
      Nat.Primrec.left.pair Nat.Primrec.right
    exact (Nat.Primrec.right.comp Nat.Primrec.right).comp (hg.comp hpair)
  inter_spec := by
    intro n m h
    exact dsharp_intI_correct P (fun _ => 0) (fun _ => 0) (fun s => P.inter s.unpair.1
     s.unpair.2) hD
      (fun a b hh => by simp only [unpair_pair_fst, unpair_pair_snd]; exact P.
    inter_spec hh) n m h
  masterIdx := 0
  masterIdx_spec := Vsharp_zero P

theorem dsharp_isEffectivelyGiven (P : ComputablePresentation D)
    (hD : ∀ X, D.mem X → X.Nonempty) :
    (Dsharp D hD).IsEffectivelyGiven :=
  ⟨dsharpPresentation P hD⟩

end Proposition77
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Proposition77
section
set_option linter.unusedVariables false

theorem theorem_77.{u_1} : ∀ {α : Type u_1} {D : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α D)
  (hD : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α D X
    → @Set.Nonempty α X),
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven (Prod (List
    Bool) α)
    (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD) :=
  @DomainTheory.NeighbourhoodSystems.Proposition77.dsharp_isEffectivelyGiven
end

end DomainTheory.NeighbourhoodSystems.Proposition77
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive Example61

section
variable {α : Type*}

namespace Proposition77
```

```
variable {D : NeighborhoodSystem α} (hD : ∀ X, D.mem X → X.Nonempty)

@[simp] theorem dsharpPresentation_X (P : ComputablePresentation D) (n : ℕ) :
    (dsharpPresentation P hD).X n = Vsharp D P n := rfl

def inSharpMap : ApproximableMap D (Dsharp D hD) where
  rel X W := D.mem X ∧ MemS D W ∧ embZero X ⊆ W
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨D.master_mem, MemS.gamma, embZero_subset_Gamma D.master_mem⟩
  inter_right := by
    rintro X W W' ⟨hX, hW, hsub⟩ ⟨-, hW', hsub'⟩
    exact ⟨hX, memS_inter hD hW hW' (MemS.zero hX) (Set.subset_inter hsub hsub'),
      Set.subset_inter hsub hsub'⟩
  mono := by
    rintro X X' W W' ⟨hX, hW, hsub⟩ hX'X hWW' hX'mem hW'mem
    exact ⟨hX'mem, hW'mem, (embZero_subset.mpr hX'X).trans (hsub.trans hWW')⟩

@[simp] theorem inSharpMap_rel {X : Set α} {W : Set (List Bool × α)} :
    (inSharpMap hD).rel X W ↔ D.mem X ∧ MemS D W ∧ embZero X ⊆ W := Iff.rfl

def proj0Map : ApproximableMap (Dsharp D hD) (Dsharp D hD) where
  rel W Z := MemS D W ∧ MemS D Z ∧ (Z = Gamma D ∨ ∃ Pp Qq, W = embPair Pp Qq ∧ Pp ⊆ Z)
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨MemS.gamma, MemS.gamma, Or.inl rfl⟩
  inter_right := by
    rintro W Z Z' ⟨hW, hZ, hd⟩ ⟨-, hZ', hd'⟩
    have hgZ : Z ⊆ Gamma D := memS_subset_gamma hZ
    have hgZ' : Z' ⊆ Gamma D := memS_subset_gamma hZ'
    rcases hd with rfl | ⟨Pp, Qq, hWeq, hPZ⟩
    · rw [Set.inter_eq_right.mpr hgZ']; exact ⟨hW, hZ', hd'⟩
    · rcases hd' with rfl | ⟨Pp', Qq', hWeq', hPZ'⟩
      · rw [Set.inter_eq_left.mpr hgZ]; exact ⟨hW, hZ, Or.inr ⟨Pp, Qq, hWeq, hPZ⟩⟩
      · have hPP : Pp = Pp' := (embPair_injective (hWeq.symm.trans hWeq')).1
        have hPsub : Pp ⊆ Z ∩ Z' := Set.subset_inter hPZ (by rw [hPP]; exact hPZ')
        have hMemP : MemS D Pp := (memS_embPair_inv hD (hWeq ▶ hW)).1
        exact ⟨hW, memS_inter hD hZ hZ' hMemP hPsub, Or.inr ⟨Pp, Qq, hWeq, hPsub⟩⟩
  mono := by
    rintro W W' Z Z' ⟨hW, hZ, hd⟩ hW'W hZZ' hW'mem hZ'mem
    refine ⟨hW'mem, hZ'mem, ?_⟩
    rcases hd with rfl | ⟨Pp, Qq, hWeq, hPZ⟩
    · exact Or.inl (Set.Subset.antisymm (memS_subset_gamma hZ'mem) hZZ')
    · subst hWeq
      cases hW'mem with
      | gamma =>
        exact absurd (Set.Subset.antisymm (memS_subset_gamma hW) hW'W)
          (embPair_ne_Gamma D hD Pp Qq)
      | @zero X hX =>
        exfalso
        obtain ⟨a, ha⟩ := hD X hX
        rcases hW'W (show (([], a) : List Bool × α) ∈ embZero X from ⟨rfl, ha⟩) with
          ⟨p', hp', -⟩ | ⟨q', hq', -⟩
        · simp at hp'
        · simp at hq'
      | @pair Pp' Qq' hP' hQ' =>
```

```
        obtain ⟨hP'P, -⟩ := embPair_subset.mp hW'W
        exact Or.inr ⟨Pp', Qq', rfl, fun z hz => hZZ' (hPZ (hP'P hz))⟩

@[simp] theorem proj0Map_rel {W Z : Set (List Bool × α)} :
    (proj0Map hD).rel W Z ↔
      MemS D W ∧ MemS D Z ∧ (Z = Gamma D ∨ ∃ Pp Qq, W = embPair Pp Qq ∧ Pp ⊆ Z) := Iff
    .rfl

theorem inSharpMap_toElementMap (x : D.Element) :
    (inSharpMap hD).toElementMap x = inSharp D hD x := by
  apply Element.ext
  intro W
  simp only [ApproximableMap.mem_toElementMap, inSharpMap_rel]
  constructor
  · rintro ⟨X, hXx, hX, hW, hsub⟩
    cases hW with
    | gamma => exact Or.inl rfl
    | @zero Y hY => exact Or.inr ⟨Y, x.up_mem hXx hY (embZero_subset.mp hsub), rfl⟩
    | @pair Pp Qq hP hQ =>
      exfalso
      obtain ⟨a, ha⟩ := hD X hX
      rcases hsub (show (([], a) : List Bool × α) ∈ embZero X from ⟨rfl, ha⟩) with
        ⟨p', hp', -⟩ | ⟨q', hq', -⟩
      · simp at hp'
      · simp at hq'
  · rintro (rfl | ⟨Y, hYx, rfl⟩)
    · exact ⟨D.master, x.master_mem, D.master_mem, MemS.gamma, embZero_subset_Gamma D.
    master_mem⟩
    · exact ⟨Y, hYx, x.sub hYx, MemS.zero (x.sub hYx), subset_rfl⟩

theorem inSharp_isComputable (P : ComputablePresentation D) :
    ComputableMap P (dsharpPresentation P hD) (inSharpMap hD) := by
  constructor
  show REPred (fun s => (inSharpMap hD).rel (P.X s.unpair.1) (Vsharp D P s.unpair.2))
  have hincl : RecDecidable (fun s => Vsharp D P s.unpair.1 ⊆ Vsharp D P s.unpair.2)
    :=
    (dsharpPresentation P hD).incl_computable
  have hr : Nat.Primrec (fun t => Nat.pair (2 * t.unpair.1 + 1) t.unpair.2) :=
    (primrec_add₂ (primrec_mul₂ (Nat.Primrec.const 2) Nat.Primrec.left)
      (Nat.Primrec.const 1)).pair Nat.Primrec.right
  refine (RecDecidable.of_iff (fun t => ?_) (hincl.comp hr)).re
  simp only [inSharpMap_rel, unpair_pair_fst, unpair_pair_snd, Vsharp_odd]
  exact ⟨fun h => h.2.2, fun h => ⟨P.mem_X _, Vsharp_mem P _, h⟩⟩

theorem proj0_rel_Vsharp_iff (P : ComputablePresentation D) (m k : ℕ) :
    (proj0Map hD).rel (Vsharp D P m) (Vsharp D P k) ↔
      k = 0 ∨ (m % 2 = 0 ∧ m = 0 ∧ Vsharp D P (m / 2 - 1).unpair.1 ⊆ Vsharp D P k) :=
    by
  rw [proj0Map_rel, and_iff_right (Vsharp_mem P m), and_iff_right (Vsharp_mem P k)]
  refine or_congr (Vsharp_eq_Gamma_iff P hD k) ?_
  rcases nat_shape m with rfl | ⟨a, rfl⟩ | ⟨a, rfl⟩
  · rw [Vsharp_zero]
    constructor
    · rintro ⟨Pp, Qq, heq, -⟩; exact absurd heq.symm (embPair_ne_Gamma D hD Pp Qq)
    · rintro ⟨-, hne, -⟩; exact absurd rfl hne
  · rw [Vsharp_odd]
```

```
    constructor
    · rintro ⟨Pp, Qq, heq, -⟩; exact absurd heq (embZero_ne_embPair D hD (P.mem_X a) Pp
    Qq)
    · rintro ⟨hmod, -, -⟩; exact absurd hmod (by omega)
  · rw [Vsharp_even, show (2 * a + 2) / 2 - 1 = a from by omega]
    constructor
    · rintro ⟨Pp, Qq, heq, hPk⟩
      obtain ⟨hP, -⟩ := embPair_injective heq
      exact ⟨by omega, by omega, by rw [hP]; exact hPk⟩
    · rintro ⟨-, -, hsub⟩
      exact ⟨Vsharp D P a.unpair.1, Vsharp D P a.unpair.2, rfl, hsub⟩

theorem proj0_isComputable (P : ComputablePresentation D) :
    ComputableMap (dsharpPresentation P hD) (dsharpPresentation P hD) (proj0Map hD) :=
     by
  constructor
  show REPred (fun s => (proj0Map hD).rel (Vsharp D P s.unpair.1) (Vsharp D P s.unpair
    .2))
  have hk0 : RecDecidable (fun s => s.unpair.2 = 0) :=
    RecDecidable.natEq Nat.Primrec.right (Nat.Primrec.const 0)
  have hmod : RecDecidable (fun s => s.unpair.1 % 2 = 0) :=
    RecDecidable.natEq (primrec_mod2.comp Nat.Primrec.left) (Nat.Primrec.const 0)
  have hne : RecDecidable (fun s => s.unpair.1 = 0) :=
    (RecDecidable.natEq Nat.Primrec.left (Nat.Primrec.const 0)).not
  have hg : Nat.Primrec (fun s => Nat.pair (s.unpair.1 / 2 - 1).unpair.1 s.unpair.2)
    :=
    (Nat.Primrec.left.comp (primrec_sub₂ (primrec_div2.comp Nat.Primrec.left)
      (Nat.Primrec.const 1))).pair Nat.Primrec.right
  have hincl : RecDecidable (fun s => Vsharp D P (s.unpair.1 / 2 - 1).unpair.1 ⊆
      Vsharp D P s.unpair.2) := by
    refine RecDecidable.of_iff (fun s => ?_) ((dsharpPresentation P hD).
    incl_computable.comp hg)
    simp only [dsharpPresentation_X, unpair_pair_fst, unpair_pair_snd]
  exact (RecDecidable.of_iff (fun s => proj0_rel_Vsharp_iff hD P s.unpair.1 s.unpair
    .2)
    (hk0.or (hmod.and (hne.and hincl)))).re

theorem proj0_toElementMap_pairSharp (x y : (Dsharp D hD).Element) :
    (proj0Map hD).toElementMap (pairSharp D hD x y) = x := by
  apply Element.ext
  intro Z
  simp only [ApproximableMap.mem_toElementMap, proj0Map_rel]
  constructor
  · rintro ⟨W, hWmem, hMW, hMZ, hdisj⟩
    rcases hWmem with rfl | ⟨Pp, Qq, hxP, hyQ, rfl⟩
    · rcases hdisj with rfl | ⟨Pp', Qq', hPe, -⟩
      · exact x.master_mem
      · exact absurd hPe.symm (embPair_ne_Gamma D hD Pp' Qq')
    · rcases hdisj with rfl | ⟨Pp', Qq', hPe, hP'Z⟩
      · exact x.master_mem
      · obtain ⟨hPP, -⟩ := embPair_injective hPe
        exact x.up_mem hxP hMZ (by rw [hPP]; exact hP'Z)
  · intro hxZ
    exact ⟨embPair Z (Gamma D), Or.inr ⟨Z, Gamma D, hxZ, y.master_mem, rfl⟩,
      MemS.pair (x.sub hxZ) MemS.gamma, x.sub hxZ, Or.inr ⟨Z, Gamma D, rfl, subset_rfl⟩
    ⟩
```

```
end Proposition77
end

section
variable {α : Type*}

namespace Proposition77

variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)

theorem gList_length (step : ℕ → ℕ) (w : ℕ) : (gList step w).length = w := by
  induction w with
  | zero => rfl
  | succ w ih => rw [gList, List.length_cons, ih]

end Proposition77
end

namespace Exercise722
open Set Domain.Recursive

section

def SsysX_default : Set (List Bool) := Set.univ
end

end Exercise722
open NeighborhoodSystem Domain.Recursive ApproximableMap

section
variable {α β ? α' β' : Type*}
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

def prodEnum (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁) (t : ℕ)
    :
    Set (α ? β) :=
  prodNbhd (P₀.X t.unpair.1) (P₁.X t.unpair.2)

@[simp] theorem prodEnum_apply (P₀ : ComputablePresentation V₀) (P₁ :
    ComputablePresentation V₁)
    (t : ℕ) : prodEnum P₀ P₁ t = prodNbhd (P₀.X t.unpair.1) (P₁.X t.unpair.2) := rfl

end

section
variable {α β ? α' β' : Type*}

theorem prodNbhd_eq_iff {X X' : Set α} {Y Y' : Set β} :
    prodNbhd X Y = prodNbhd X' Y' ↔ X = X' ∧ Y = Y' :=
  ⟨prodNbhd_injective, by rintro ⟨rfl, rfl⟩; rfl⟩
end

end DomainTheory.NeighbourhoodSystems
end
```

PROPOSITION 7.7. For any effectively given domain D, the domain $D^{\S}$ is also effectively given, and all the combinators of Example 6.1 prove to be computable.

Proof: This proof is essentially an exercise, but it is useful to have an easy-to-grasp example. Indeed, to make things easy to reason about, we can assume that D is a system over $\Delta = \mathbf{N}$, and that in the presentation where

$$D = \{X_n \mid n \in \mathbf{N}\},$$

the relation $k \in X_n$ is *recursive* in k and n. (It is worth thinking why this is so.) Of course, a lot of other things are recursive also.

Now what kind of a system is $D^{\S}$? The construction of 6.1 made it a system over a certain set of strings Γ. For the sake of checking various assertions about computability, we are transposing everything back to $\mathbf{N}$. (These are all denumerable sets in any case.) The set Γ is divided into three equally big parts, and we can do the same for $\mathbf{N}$. Let us write for any $m, k \in \mathbf{N}$ and subset $X \subseteq \mathbf{N}$:

$$mX + k = \{m \cdot n + k \mid n \in X\}.$$

Then by splitting the integers modulo 3 we have:

$$\mathbf{N} = 3\mathbf{N} \cup (3\mathbf{N} + 1) \cup (3\mathbf{N} + 2),$$

and this equation is quite analogous to that for Γ. We then propose this definition for $D^{\S}$:

$$D^{\S} = \{\mathbf{N}\} \cup \{3X \mid X \in D\} \cup \{(3X + 1) \cup (3Y + 2) \mid X, Y \in D^{\S}\},$$

but this does not make the enumeration of $D^{\S}$ all that obvious. This is one way to do it:

$$V_0 = \mathbf{N}\ ;\ V_{2n+1} = 3X_n\ ;\ V_{2n+2} = (3V_{p(n)} + 1) \cup (3V_{q(n)} + 2).$$

Here p and q are the inverse of the pairing functions mentioned in 7.4. They must be chosen so that $p(n) < n$ and $q(n) < n$ for all $n \in \mathbf{N}$. Thus, in calculating V_k where $k = 2n + 2$ we will be using $V_{p(n)}$ and $V_{q(n)}$ where both subscripts are strictly less than k. This observation is required so that $m \in V_k$ is going to be a recursive relation. What we claim is that

$$D^{\S} = \{V_k \mid k \in \mathbf{N}\}.$$

It should be clear that everything on the right belongs to $D^{\S}$. What needs an inductive argument is that everything in $D^{\S}$ is eventually of the form V_k. But this should be fairly obvious owing to the properties of $r : \mathbf{N} \times \mathbf{N} \leftrightarrow \mathbf{N}$.

The reader also has to check that 7.1(i)–(ii) hold for the V_k. The idea is that any such check is either (1) trivial, or (2) something already assumed about D and the X_n, or (3) can be thrown back to some sets V_m with strictly smaller subscripts. Therefore, the checks will give an answer in finite time according to an effective reduction.

Next for the combinators, we have to translate neighbourhood relations into relations among integer indices. A selection of examples must suffice,

$$X_n\ (\lambda x.\, x^{\S})\ V_k \text{ iff } V_{2n+1} \subseteq V_k$$

$$V_m\ \mathrm{proj}_0\ V_k \text{ iff } k = 0 \text{ or } \exists n \in \mathbf{N}.\, m = 2n + 2 \text{ and } V_{p(n)} \subseteq V_k.$$

The reader should write out other cases. □

3.8.9 Example 7.8 — powerset effectively given

Example_7_8.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_1

public import Mathlib.Data.Nat.Bitwise

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Example78
open Domain.Recursive NeighborhoodSystem

section

def nbhd (n : ℕ) : Set ℕ := {k | n.testBit k = false}
end

section
@[simp] theorem mem_nbhd {n k : ℕ} : k ∈ nbhd n ↔ n.testBit k = false := Iff.rfl
end

section

theorem nbhd_injective {n m : ℕ} (h : nbhd n = nbhd m) : n = m := by
  apply Nat.eq_of_testBit_eq
  intro k
  have hk : (n.testBit k = false) ↔ (m.testBit k = false) := by
    have := Set.ext_iff.mp h k; simpa only [mem_nbhd] using this
  cases hn : n.testBit k <;> cases hm : m.testBit k <;> simp_all
end

section

theorem nbhd_inter (n m : ℕ) : nbhd n ∩ nbhd m = nbhd (myLor n m) := by
  ext k
  simp only [nbhd, Set.mem_inter_iff, Set.mem_ofPred_eq, myLor_eq_lor, Nat.testBit_lor
    ,
    Bool.or_eq_false_iff]
end

section

theorem nbhd_zero : nbhd 0 = Set.univ := by
  ext k; simp [nbhd, Nat.zero_testBit]
end

section

def PN : NeighborhoodSystem ℕ where
```

```
  mem Y := ∃ n, Y = nbhd n
  master := Set.univ
  master_nonempty := Set.univ_nonempty
  master_mem := ⟨0, nbhd_zero.symm⟩
  inter_mem := by
    rintro X Y Z ⟨a, rfl⟩ ⟨b, rfl⟩ _ _
    exact ⟨myLor a b, nbhd_inter a b⟩
  sub_master := by rintro X _; exact Set.subset_univ X
end

end DomainTheory.NeighbourhoodSystems.Example78

section
namespace DomainTheory.NeighbourhoodSystems.Example78
open Domain.Recursive NeighborhoodSystem
section

def PNpres : ComputablePresentation PN where
  X := nbhd
  mem_X n := ⟨n, rfl⟩
  surj := by rintro Y ⟨n, rfl⟩; exact ⟨n, rfl⟩
  interEq_computable := by

    refine RecDecidable.of_iff (q := fun t =>
        nbhd t.unpair.1 ∩ nbhd t.unpair.2.unpair.1 = nbhd t.unpair.2.unpair.2)
      (fun t => ?_)
      (RecDecidable.natEq
        (a := fun t => myLor t.unpair.1 t.unpair.2.unpair.1)
        (b := fun t => t.unpair.2.unpair.2)
        ((primrec_myLor.comp
          (Nat.Primrec.left.pair (Nat.Primrec.left.comp Nat.Primrec.right))).of_eq fun
     s => by
            simp only [unpair_pair_fst, unpair_pair_snd])
        (Nat.Primrec.right.comp Nat.Primrec.right))

    constructor
    · intro h; exact nbhd_injective ((nbhd_inter _ _).symm.trans h)
    · intro h; rw [nbhd_inter]; exact congrArg nbhd h
  cons_computable :=
    recDecidable_of_forall fun t => ⟨myLor t.unpair.1 t.unpair.2, (nbhd_inter _ _).symm
    .subset⟩
  inter := myLor
  inter_primrec := primrec_myLor
  inter_spec := fun {n m} _ => (nbhd_inter n m).symm
  masterIdx := 0
  masterIdx_spec := nbhd_zero
end

section

theorem PN_consistent (n m : ℕ) : ∃ k, nbhd k ⊆ nbhd n ∩ nbhd m :=
  ⟨myLor n m, (nbhd_inter n m).symm.subset⟩
end

section
```

```
theorem PN_isEffectivelyGiven : PN.IsEffectivelyGiven := ⟨PNpres⟩
end

end DomainTheory.NeighbourhoodSystems.Example78
end
```

EXAMPLE 7.8. We have often made reference to the powerset $P\mathbf{N}$ as a domain and we should check here that it is effectively given. One easy way to see this is to note

$$P\mathbf{N} \cong |T^\infty|.$$

The (slight) trouble with $P\mathbf{N}$ is that we usually think of it in terms of *elements* rather than *neighbourhoods*. Going back to Exercise 1.16, we can argue that the neighbourhoods of $P\mathbf{N}$ are ordered not like the finite sets of integers but in the partial ordering *converse* to that. But this is of no trouble, since all will be decidable. What we need first is an enumeration of all finite sets of integers. We can do this by:

$$E_n = \{k \mid \exists i, j.\, i < 2^k \text{ and } n = i + 2^k + j \cdot 2^{k+1}\}.$$

The idea is that $k \in E_n$ means that the exponent k does occur in the binary expansion of n as a sum of powers of 2. All finite subsets of $\mathbf{N}$ are of the form E_n. We then find that as a neighbourhood system

$$(P\mathbf{N}) = \{\mathbf{N} \setminus E_n \mid n \in \mathbf{N}\}.$$

As the relationship $E_n \cup E_m = E_k$ is recursive, there is no trouble in proving that this is a computable presentation. In this system, of course, any two neighbourhoods are consistent. Various combinators on $P\mathbf{N}$ are suggested in Exercise 7.23. □

We end this chapter with an example of another kind of domain construct. This construct is known as the *Smyth Power Domain*. It is defined for any neighbourhood system $\mathcal{D}$ and results in a new system we shall call here $\mathbb{P}\mathcal{D}$. The elements of $\mathbb{P}\mathcal{D}$ behave rather like *sets of elements* of $\mathcal{D}$, but since our elements can be either partial or total, there are certain dangers to pushing the analogy too far. For some purposes a rival construct called the *Plotkin Power Domain* is better, but it leads outside the category of neighbourhood systems as defined in these lectures. Do not confuse $P\mathbf{N}$ with $\mathbb{P}\mathcal{D}$.

3.8.10 Definition 7.9 — power domain

DEFINITION 7.9. Let $\mathcal{D}$ be any neighbourhood system and define

$$\mathbb{P}\mathcal{D} = \left\{ \bigcup_{i<n} (\downarrow X_i) \mid \forall i < n.\, X_i \in \mathcal{D} \right\}.$$

We recall that for any $X \in \mathcal{D}$

$$\downarrow X = \{Y \in \mathcal{D} \mid Y \subseteq X\}.$$

The finite unions in $\mathbb{P}\mathcal{D}$ can be empty (i.e. if $n = 0$). □

Formally, the system $\mathbb{P}\mathcal{D}$ is just more or less the closure of $\mathcal{D}$ under finite unions; however, this would not be an isomorphism-invariant construct unless $\mathcal{D}$ is "prepared". The preparation consists of replacing $\mathcal{D}$ by the isomorphic domain

$$\mathcal{D}^\dagger = \{\downarrow X \mid X \in \mathcal{D}\}.$$

(In this connection refer back to Exercise 1.20.) We remark that

$$\downarrow X \cap \downarrow Y \neq \emptyset \text{ iff } \{X, Y\} \text{ is consistent in } \mathcal{D},$$

and in that case

$$\downarrow X \cap \downarrow Y = \downarrow (X \cap Y).$$

Definition_7_9.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_20

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section
variable {α : Type*} (V : NeighborhoodSystem α)

def PDmem (W : Set (Set α)) : Prop :=
  ∃ L : List (Set α), (∀ X ∈ L, V.mem X) ∧ W = ⋃ X ∈ L, V.upSet X

abbrev dagger : NeighborhoodSystem (Set α) := V.powerSystem

theorem PDmem_union {W₁ W₂ : Set (Set α)} (h₁ : V.PDmem W₁) (h₂ : V.PDmem W₂) :
    V.PDmem (W₁ ∪ W₂) := by
  obtain ⟨L₁, hL₁, rfl⟩ := h₁
  obtain ⟨L₂, hL₂, rfl⟩ := h₂
  refine ⟨L₁ ++ L₂, ?_, ?_⟩
  · intro X hX
    rcases List.mem_append.mp hX with h | h
    · exact hL₁ X h
    · exact hL₂ X h
  · ext z
    simp only [Set.mem_union, Set.mem_iUnion, exists_prop, List.mem_append]
    constructor
    · rintro (⟨X, hX, hz⟩ | ⟨X, hX, hz⟩)
      · exact ⟨X, Or.inl hX, hz⟩
      · exact ⟨X, Or.inr hX, hz⟩
    · rintro ⟨X, hX | hX, hz⟩
      · exact Or.inl ⟨X, hX, hz⟩
      · exact Or.inr ⟨X, hX, hz⟩

theorem dagger_isomorphic : V ≅? V.dagger := V.isomorphic_powerSystem

theorem dagger_upSet_inter {X Y Z : Set α} (hX : V.mem X) (hY : V.mem Y) (hZ : V.mem Z
    )
    (hsub : Z ⊆ X ∩ Y) : V.dagger.mem (V.upSet X ∩ V.upSet Y) := by
```

```
  rw [V.upSet_inter]
  exact ⟨X ∩ Y, V.inter_mem hX hY hZ hsub, rfl⟩

theorem mem_PDunion {L : List (Set α)} {z : Set α} :
    z ∈ (⋃ X ∈ L, V.upSet X) ↔ ∃ X ∈ L, z ∈ V.upSet X := by
  simp only [Set.mem_iUnion, exists_prop]

theorem PDmem_empty : V.PDmem ∅ := by
  refine ⟨[], ?_, ?_⟩
  · intro X hX; cases hX
  · ext z
    rw [mem_PDunion]
    constructor
    · intro h; exact absurd h (Set.notMem_empty z)
    · rintro ⟨X, hX, _⟩; cases hX

theorem PDmem_iff_fin {W : Set (Set α)} :
    V.PDmem W ↔ ∃ (n : ℕ) (X : Fin n → Set α),
      (∀ i, V.mem (X i)) ∧ W = ⋃ i, V.upSet (X i) := by
  constructor
  · rintro ⟨L, hL, rfl⟩
    refine ⟨L.length, L.get, fun i => hL _ (L.get_mem i), ?_⟩
    ext z
    rw [mem_PDunion, Set.mem_iUnion]
    constructor
    · rintro ⟨X, hX, hz⟩
      obtain ⟨i, rfl⟩ := List.get_of_mem hX
      exact ⟨i, hz⟩
    · rintro ⟨i, hz⟩
      exact ⟨L.get i, L.get_mem i, hz⟩
  · rintro ⟨n, X, hX, rfl⟩
    refine ⟨List.ofFn X, ?_, ?_⟩
    · intro Y hY
      obtain ⟨i, rfl⟩ := Set.mem_range.mp (List.mem_ofFn.mp hY)
      exact hX i
    · ext z
      rw [Set.mem_iUnion, mem_PDunion]
      constructor
      · rintro ⟨i, hz⟩
        exact ⟨X i, List.mem_ofFn.mpr (Set.mem_range.mpr ⟨i, rfl⟩), hz⟩
      · rintro ⟨Y, hY, hz⟩
        obtain ⟨i, rfl⟩ := Set.mem_range.mp (List.mem_ofFn.mp hY)
        exact ⟨i, hz⟩

theorem PDmem_upSet {X : Set α} (hX : V.mem X) : V.PDmem (V.upSet X) := by
  refine ⟨[X], ?_, ?_⟩
  · intro Y hY; rw [List.mem_singleton] at hY; subst hY; exact hX
  · ext z
    rw [mem_PDunion]
    constructor
    · intro hz; exact ⟨X, List.mem_singleton.mpr rfl, hz⟩
    · rintro ⟨Y, hY, hz⟩; rw [List.mem_singleton] at hY; subst hY; exact hz

theorem PDmem_master : V.PDmem (V.upSet V.master) := V.PDmem_upSet V.master_mem

theorem upSet_inter_nonempty_iff {X Y : Set α} :
```

```
    (V.upSet X ∩ V.upSet Y).Nonempty ↔ ∃ Z, V.mem Z ∧ Z ⊆ X ∩ Y := by
  rw [V.upSet_inter]
  constructor
  · rintro ⟨Z, hZmem, hZsub⟩; exact ⟨Z, hZmem, hZsub⟩
  · rintro ⟨Z, hZmem, hZsub⟩; exact ⟨Z, hZmem, hZsub⟩

end

end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
end
```

3.8.11 Proposition 7.10 — power domain effective

Proposition_7_10.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_14

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive
section
namespace NeighborhoodSystem
variable {α : Type*} (V : NeighborhoodSystem α)

abbrev PowerDomain : NeighborhoodSystem (Set α) where
  mem := V.PDmem
  master := V.upSet V.master
  master_nonempty := ⟨V.master, V.master_mem, subset_rfl⟩
  master_mem := V.PDmem_master
  inter_mem := fun h₁ h₂ _ _ => V.PDmem_inter h₁ h₂
  sub_master := by
    intro W hW
    obtain ⟨L, hL, rfl⟩ := hW
    intro Z hZ
    rw [V.mem_PDunion] at hZ
    obtain ⟨X, hX, hZmem, hZsub⟩ := hZ
    exact ⟨hZmem, hZsub.trans (V.sub_master (hL X hX))⟩

@[simp] theorem PowerDomain_mem {W : Set (Set α)} : V.PowerDomain.mem W ↔ V.PDmem W :=
     Iff.rfl

@[simp] theorem PowerDomain_master : V.PowerDomain.master = V.upSet V.master := rfl

end NeighborhoodSystem
end

section
namespace NeighborhoodSystem
```

```
variable {α : Type*} (V : NeighborhoodSystem α)

variable (P : ComputablePresentation V)

def UPX (l : List ℕ) : Set (Set α) := ⋃ b ∈ l, V.upSet (P.X b)

theorem UPX_def (l : List ℕ) : V.UPX P l = ⋃ b ∈ l, V.upSet (P.X b) := rfl

def Ypd (c : ℕ) : Set (Set α) := V.UPX P (decodeList c)

theorem Ypd_def (c : ℕ) : V.Ypd P c = V.UPX P (decodeList c) := rfl

def innerInterStp (cons : ℕ → ℕ) (w : ℕ) : ℕ :=
  selectFn (isOne (cons (Nat.pair w.unpair.2.unpair.2 w.unpair.1)))
    (Nat.pair (P.inter w.unpair.2.unpair.2 w.unpair.1) w.unpair.2.unpair.1 + 1)
    w.unpair.2.unpair.1

def innerInterCode (cons : ℕ → ℕ) (a acc m : ℕ) : ℕ := foldCode (V.innerInterStp P
    cons) a acc m

theorem innerInterStp_eq (cons : ℕ → ℕ) (a acc b : ℕ) :
    V.innerInterStp P cons (Nat.pair b (Nat.pair acc a))
      = selectFn (isOne (cons (Nat.pair a b))) (Nat.pair (P.inter a b) acc + 1) acc :=
     by
  unfold innerInterStp; simp only [unpair_pair_fst, unpair_pair_snd]

theorem innerInterCode_eq (cons : ℕ → ℕ) (a acc m : ℕ) :
    V.innerInterCode P cons a acc m
      = List.foldl (fun acc b => selectFn (isOne (cons (Nat.pair a b)))
          (Nat.pair (P.inter a b) acc + 1) acc) acc (decodeList m) := by
  have hf : (fun (acc x : ℕ) => V.innerInterStp P cons (Nat.pair x (Nat.pair acc a)))
      = (fun acc b => selectFn (isOne (cons (Nat.pair a b))) (Nat.pair (P.inter a b)
    acc + 1) acc) := by
    funext acc b; exact V.innerInterStp_eq P cons a acc b
  unfold innerInterCode; rw [foldCode_eq', hf]

theorem mem_UPX {l : List ℕ} {z : Set α} :
    z ∈ V.UPX P l ↔ ∃ b ∈ l, z ∈ V.upSet (P.X b) := by
  simp only [UPX, Set.mem_iUnion, exists_prop]

theorem UPX_cons (b : ℕ) (l : List ℕ) :
    V.UPX P (b :: l) = V.upSet (P.X b) ∪ V.UPX P l := by
  ext z
  rw [Set.mem_union, V.mem_UPX P, V.mem_UPX P]
  constructor
  · rintro ⟨c, hc, hz⟩
    rcases List.mem_cons.mp hc with rfl | hc'
    · exact Or.inl hz
    · exact Or.inr ⟨c, hc', hz⟩
  · rintro (hz | ⟨c, hc, hz⟩)
    · exact ⟨b, List.mem_cons.mpr (Or.inl rfl), hz⟩
    · exact ⟨c, List.mem_cons.mpr (Or.inr hc), hz⟩

theorem UPX_nil : V.UPX P [] = ∅ := by
  ext z
```

```
  rw [V.mem_UPX P]
  simp only [List.not_mem_nil, false_and, exists_false, Set.mem_empty_iff_false]

theorem Ypd_cons_code (v acc : ℕ) :
    V.Ypd P (Nat.pair v acc + 1) = V.upSet (P.X v) ∪ V.Ypd P acc := by
  rw [Ypd_def, decodeList_succ, unpair_pair_fst, unpair_pair_snd, V.UPX_cons P, ← V.
    Ypd_def P]

theorem Ypd_zero : V.Ypd P 0 = ∅ := by rw [Ypd_def, decodeList_zero, V.UPX_nil P]

theorem PDmem_exists_Ypd_aux :
    ∀ (L : List (Set α)), (∀ X ∈ L, V.mem X) → ∃ c, V.Ypd P c = ⋃ X ∈ L, V.upSet X :=
     by
  intro L
  induction L with
  | nil => intro _; exact ⟨0, by rw [V.Ypd_zero P, V.upSetUnion_nil]⟩
  | cons X L ih =>
    intro hL
    obtain ⟨n, hn⟩ := P.surj (hL X (List.mem_cons.mpr (Or.inl rfl)))
    obtain ⟨c', hc'⟩ := ih (fun Y hY => hL Y (List.mem_cons.mpr (Or.inr hY)))
    exact ⟨Nat.pair n c' + 1, by rw [V.Ypd_cons_code P, hn, hc', V.upSetUnion_cons]⟩

theorem PDmem_exists_Ypd {W : Set (Set α)} (hW : V.PDmem W) : ∃ c, V.Ypd P c = W := by
  obtain ⟨L, hL, rfl⟩ := hW
  exact V.PDmem_exists_Ypd_aux P L hL

theorem mem_Ypd {c : ℕ} {z : Set α} :
    z ∈ V.Ypd P c ↔ ∃ a ∈ decodeList c, z ∈ V.upSet (P.X a) := V.mem_UPX P

theorem Ypd_isPDmem (c : ℕ) : V.PDmem (V.Ypd P c) := by
  refine ⟨(decodeList c).map P.X, ?_, ?_⟩
  · intro X hX
    obtain ⟨a, _, rfl⟩ := List.mem_map.mp hX
    exact P.mem_X a
  · ext z
    rw [V.mem_Ypd P, V.mem_PDunion]
    constructor
    · rintro ⟨a, ha, hz⟩; exact ⟨P.X a, List.mem_map.mpr ⟨a, ha, rfl⟩, hz⟩
    · rintro ⟨X, hX, hz⟩
      obtain ⟨a, ha, rfl⟩ := List.mem_map.mp hX
      exact ⟨a, ha, hz⟩

def outerInterStp (cons : ℕ → ℕ) (w : ℕ) : ℕ :=
  V.innerInterCode P cons w.unpair.1 w.unpair.2.unpair.1 w.unpair.2.unpair.2

def interCode (cons : ℕ → ℕ) (n m : ℕ) : ℕ := foldCode (V.outerInterStp P cons) m 0 n

theorem outerInterStp_eq (cons : ℕ → ℕ) (a acc m : ℕ) :
    V.outerInterStp P cons (Nat.pair a (Nat.pair acc m)) = V.innerInterCode P cons a
    acc m := by
  unfold outerInterStp; simp only [unpair_pair_fst, unpair_pair_snd]

theorem interCode_eq (cons : ℕ → ℕ) (n m : ℕ) :
    V.interCode P cons n m
      = List.foldl (fun acc a => V.innerInterCode P cons a acc m) 0 (decodeList n) :=
    by
```

```
  have hf : (fun (acc x : ℕ) => V.outerInterStp P cons (Nat.pair x (Nat.pair acc m)))
      = (fun acc a => V.innerInterCode P cons a acc m) := by
    funext acc a; exact V.outerInterStp_eq P cons a acc m
  unfold interCode; rw [foldCode_eq', hf]

theorem primrec_innerInterStp (cons : ℕ → ℕ) (hconsp : Nat.Primrec cons) :
    Nat.Primrec (V.innerInterStp P cons) := by
  have h1 : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hacc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have ha : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hpair_ab : Nat.Primrec (fun w : ℕ => Nat.pair w.unpair.2.unpair.2 w.unpair.1)
    := ha.pair h1
  have hcons_ab : Nat.Primrec (fun w : ℕ => cons (Nat.pair w.unpair.2.unpair.2 w.
    unpair.1)) :=
    hconsp.comp hpair_ab
  have hinter_ab : Nat.Primrec (fun w : ℕ => P.inter w.unpair.2.unpair.2 w.unpair.1)
    :=
    (P.inter_primrec.comp hpair_ab).of_eq (fun w => by simp only [unpair_pair_fst,
    unpair_pair_snd])
  have hprepend : Nat.Primrec
      (fun w : ℕ => Nat.pair (P.inter w.unpair.2.unpair.2 w.unpair.1) w.unpair.2.
    unpair.1 + 1) :=
    Nat.Primrec.succ.comp (hinter_ab.pair hacc)
  exact (primrec_selectFn (primrec_isOne.comp hcons_ab) hprepend hacc).of_eq (fun _ =>
     rfl)

theorem primrec_outerInterStp (cons : ℕ → ℕ) (hconsp : Nat.Primrec cons) :
    Nat.Primrec (V.outerInterStp P cons) :=
  (primrec_foldCode (V.primrec_innerInterStp P cons hconsp) Nat.Primrec.left
    (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.right.comp Nat.Primrec.
    right)).of_eq
    (fun _ => rfl)

theorem primrec_interCode (cons : ℕ → ℕ) (hconsp : Nat.Primrec cons) :
    Nat.Primrec (fun t => V.interCode P cons t.unpair.1 t.unpair.2) :=
  (primrec_foldCode (V.primrec_outerInterStp P cons hconsp) Nat.Primrec.right
    (Nat.Primrec.const 0) Nat.Primrec.left).of_eq (fun _ => rfl)

theorem subCode_computable :
    RecDecidable₂ (fun c k => ∀ a ∈ decodeList c, ∃ b ∈ decodeList k, P.X a ⊆ P.X b)
    := by
  have hinner : RecDecidable₂ (fun k a => ∃ b ∈ decodeList k, P.X a ⊆ P.X b) :=
    P.incl_computable.swap.bExistsList
  exact hinner.swap.bForallList

theorem upSet_inter_eq_empty_of_not_cons {a b : ℕ}
    (h : ¬ ∃ k, P.X k ⊆ P.X a ∩ P.X b) :
    V.upSet (P.X a) ∩ V.upSet (P.X b) = ∅ := by
  rw [V.upSet_inter]
  ext Z
  simp only [mem_upSet, Set.mem_empty_iff_false, iff_false, not_and]
  intro hZmem hZsub
  obtain ⟨n, hn⟩ := P.surj hZmem
  exact h ⟨n, by rw [hn]; exact hZsub⟩
```

```
theorem Ypd_innerstep (cons : ℕ → ℕ) {a b : ℕ}
    (hcons : cons (Nat.pair a b) = 1 ↔ ∃ k, P.X k ⊆ P.X a ∩ P.X b) (acc : ℕ) :
    V.Ypd P (selectFn (isOne (cons (Nat.pair a b))) (Nat.pair (P.inter a b) acc + 1)
    acc)
      = V.Ypd P acc ∪ (V.upSet (P.X a) ∩ V.upSet (P.X b)) := by
  by_cases h : cons (Nat.pair a b) = 1
  · rw [(isOne_eq_one_iff _).mpr h, selectFn_one, V.Ypd_cons_code P]
    have hXeq : P.X (P.inter a b) = P.X a ∩ P.X b := P.inter_spec (hcons.mp h)
    rw [hXeq, ← V.upSet_inter, Set.union_comm]
  · have hisz : isOne (cons (Nat.pair a b)) = 0 := by
      have hle := isOne_le_one (cons (Nat.pair a b))
      rcases (show isOne (cons (Nat.pair a b)) = 0 ∨ isOne (cons (Nat.pair a b)) = 1
    by omega)
        with h0 | h1
      · exact h0
      · exact absurd ((isOne_eq_one_iff _).mp h1) h
    rw [hisz, selectFn_zero,
      V.upSet_inter_eq_empty_of_not_cons P (fun hk => h (hcons.mpr hk)), Set.
    union_empty]

theorem Ypd_innerfoldl (cons : ℕ → ℕ) (a : ℕ)
    (hcons : ∀ b, cons (Nat.pair a b) = 1 ↔ ∃ k, P.X k ⊆ P.X a ∩ P.X b) :
    ∀ (bs : List ℕ) (acc : ℕ),
      V.Ypd P (List.foldl (fun acc b => selectFn (isOne (cons (Nat.pair a b)))
          (Nat.pair (P.inter a b) acc + 1) acc) acc bs)
        = V.Ypd P acc ∪ (V.upSet (P.X a) ∩ V.UPX P bs) := by
  intro bs
  induction bs with
  | nil => intro acc; rw [List.foldl_nil, V.UPX_nil P, Set.inter_empty, Set.
    union_empty]
  | cons b bs ih =>
    intro acc
    rw [List.foldl_cons, ih, V.Ypd_innerstep P cons (hcons b), V.UPX_cons P,
      Set.inter_union_distrib_left, Set.union_assoc]

theorem Ypd_innerInterCode (cons : ℕ → ℕ) (a acc m : ℕ)
    (hcons : ∀ b, cons (Nat.pair a b) = 1 ↔ ∃ k, P.X k ⊆ P.X a ∩ P.X b) :
    V.Ypd P (V.innerInterCode P cons a acc m)
      = V.Ypd P acc ∪ (V.upSet (P.X a) ∩ V.Ypd P m) := by
  rw [V.innerInterCode_eq P, V.Ypd_innerfoldl P cons a hcons (decodeList m) acc, ← V.
    Ypd_def P]

theorem Ypd_outerfoldl (cons : ℕ → ℕ) (m : ℕ)
    (hcons : ∀ a b, cons (Nat.pair a b) = 1 ↔ ∃ k, P.X k ⊆ P.X a ∩ P.X b) :
    ∀ (as : List ℕ) (acc : ℕ),
      V.Ypd P (List.foldl (fun acc a => V.innerInterCode P cons a acc m) acc as)
        = V.Ypd P acc ∪ (V.UPX P as ∩ V.Ypd P m) := by
  intro as
  induction as with
  | nil => intro acc; rw [List.foldl_nil, V.UPX_nil P, Set.empty_inter, Set.
    union_empty]
  | cons a as ih =>
    intro acc
    rw [List.foldl_cons, ih, V.Ypd_innerInterCode P cons a acc m (hcons a), V.UPX_cons
     P,
```

```
      Set.union_inter_distrib_right, Set.union_assoc]

theorem Ypd_interCode (cons : ℕ → ℕ) (n m : ℕ)
    (hcons : ∀ a b, cons (Nat.pair a b) = 1 ↔ ∃ k, P.X k ⊆ P.X a ∩ P.X b) :
    V.Ypd P (V.interCode P cons n m) = V.Ypd P n ∩ V.Ypd P m := by
  rw [V.interCode_eq P, V.Ypd_outerfoldl P cons m hcons (decodeList n) 0, V.Ypd_zero P
    ,
    Set.empty_union, ← V.Ypd_def P]

theorem upSet_subset_Ypd_iff {a k : ℕ} :
    V.upSet (P.X a) ⊆ V.Ypd P k ↔ ∃ b ∈ decodeList k, P.X a ⊆ P.X b := by
  constructor
  · intro h
    have hmem : P.X a ∈ V.Ypd P k := h ⟨P.mem_X a, subset_rfl⟩
    obtain ⟨b, hb, hPab⟩ := (V.mem_Ypd P).mp hmem
    exact ⟨b, hb, hPab.2⟩
  · rintro ⟨b, hb, hab⟩ z hz
    exact (V.mem_Ypd P).mpr ⟨b, hb, hz.1, hz.2.trans hab⟩

theorem Ypd_subset_iff {c k : ℕ} :
    V.Ypd P c ⊆ V.Ypd P k ↔ ∀ a ∈ decodeList c, ∃ b ∈ decodeList k, P.X a ⊆ P.X b :=
    by
  rw [Ypd_def, UPX_def, Set.iUnion₂_subset_iff]
  constructor
  · intro h a ha; exact (V.upSet_subset_Ypd_iff P).mp (h a ha)
  · intro h a ha; exact (V.upSet_subset_Ypd_iff P).mpr (h a ha)

theorem Ypd_eq_iff {c k : ℕ} :
    V.Ypd P c = V.Ypd P k ↔
      (∀ a ∈ decodeList c, ∃ b ∈ decodeList k, P.X a ⊆ P.X b) ∧
      (∀ b ∈ decodeList k, ∃ a ∈ decodeList c, P.X b ⊆ P.X a) := by
  rw [Set.Subset.antisymm_iff, V.Ypd_subset_iff P, V.Ypd_subset_iff P]

theorem eqCode_computable : RecDecidable₂ (fun c k => V.Ypd P c = V.Ypd P k) := by
  have h := (V.subCode_computable P).and (V.subCode_computable P).swap
  refine RecDecidable.of_iff (fun t => ?_) h
  exact V.Ypd_eq_iff P

theorem Ypd_interEq_computable (cons : ℕ → ℕ) (hconsp : Nat.Primrec cons)
    (hcons : ∀ a b, cons (Nat.pair a b) = 1 ↔ ∃ k, P.X k ⊆ P.X a ∩ P.X b) :
    RecDecidable₃ (fun n m k => V.Ypd P n ∩ V.Ypd P m = V.Ypd P k) := by
  have hic : Nat.Primrec (fun t => V.interCode P cons t.unpair.1 t.unpair.2.unpair.1)
    :=
    ((V.primrec_interCode P cons hconsp).comp
      (Nat.Primrec.left.pair (Nat.Primrec.left.comp Nat.Primrec.right))).of_eq
      (fun t => by simp only [unpair_pair_fst, unpair_pair_snd])
  have hg : Nat.Primrec
      (fun t => Nat.pair (V.interCode P cons t.unpair.1 t.unpair.2.unpair.1) t.unpair
    .2.unpair.2) :=
    hic.pair (Nat.Primrec.right.comp Nat.Primrec.right)
  refine RecDecidable.of_iff (fun t => ?_) ((V.eqCode_computable P).comp hg)
  simp only [unpair_pair_fst, unpair_pair_snd]
  rw [V.Ypd_interCode P cons t.unpair.1 t.unpair.2.unpair.1 hcons]

def PDPresentation (cons : ℕ → ℕ) (hconsp : Nat.Primrec cons)
    (hcons : ∀ a b, cons (Nat.pair a b) = 1 ↔ ∃ k, P.X k ⊆ P.X a ∩ P.X b) :
```

```
    ComputablePresentation V.PowerDomain where
  X := V.Ypd P
  mem_X := fun c => V.Ypd_isPDmem P c
  surj := fun hW => V.PDmem_exists_Ypd P hW
  interEq_computable := V.Ypd_interEq_computable P cons hconsp hcons
  cons_computable :=
    recDecidable_of_forall (fun t => ⟨0, by rw [V.Ypd_zero P]; exact Set.empty_subset _
    ⟩)
  inter := V.interCode P cons
  inter_primrec := V.primrec_interCode P cons hconsp
  inter_spec := fun _ => V.Ypd_interCode P cons _ _ hcons
  masterIdx := Nat.pair P.masterIdx 0 + 1
  masterIdx_spec := by
    show V.Ypd P (Nat.pair P.masterIdx 0 + 1) = V.PowerDomain.master
    rw [V.Ypd_cons_code P, V.Ypd_zero P, Set.union_empty, P.masterIdx_spec,
    PowerDomain_master]

end NeighborhoodSystem
end

section

theorem NeighborhoodSystem.PowerDomain_isEffectivelyGiven {α : Type*} {V :
    NeighborhoodSystem α}
    (h : V.IsEffectivelyGiven) : V.PowerDomain.IsEffectivelyGiven := by
  obtain ⟨P⟩ := h
  obtain ⟨cons, hconsp, hconss⟩ := P.cons_computable
  refine ⟨V.PDPresentation P cons hconsp (fun a b => ?_)⟩
  have hb := hconss (Nat.pair a b)
  simp only [unpair_pair_fst, unpair_pair_snd] at hb
  exact hb.symm
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
section
set_option linter.unusedVariables false

theorem theorem_710.{u_1} : ∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α},
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V →
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven (Set α)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V) :=
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain_isEffectivelyGiven
end

end DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section
variable {α : Type*} (V : NeighborhoodSystem α)

def PDfinJoinZero : V.PowerDomain.Element := V.PowerDomain.bot

def PDmemFinJoin {n : ℕ} (xs : Fin n → V.Element) (W : Set (Set α)) : Prop :=
  ∃ (X : Fin n → Set α) (_hX : ∀ i, (xs i).mem (X i)),
```

```
    V.PowerDomain.mem W ∧ ∀ i, V.upSet (X i) ⊆ W

def PDfinJoinSucc {m : ℕ} (xs : Fin (m + 1) → V.Element) : V.PowerDomain.Element where
  mem := V.PDmemFinJoin xs
  sub hW := by obtain ⟨_, _, hPD, _⟩ := hW; exact hPD
  master_mem := by
    refine ⟨fun i => V.master, fun i => (xs i).master_mem, V.PDmem_master, fun i Z hz
    => hz⟩
  inter_mem h1 h2 := by
    obtain ⟨X1, hX1, hPD1, hsub1⟩ := h1
    obtain ⟨X2, hX2, hPD2, hsub2⟩ := h2
    refine ⟨fun i => X1 i ∩ X2 i, fun i => (xs i).inter_mem (hX1 i) (hX2 i),
      V.PDmem_inter hPD1 hPD2, fun i Y hY => ?_⟩
    rw [← V.upSet_inter] at hY
    rcases hY with ⟨hY1, hY2⟩
    exact ⟨hsub1 i hY1, hsub2 i hY2⟩
  up_mem h hW hsub := by
    obtain ⟨X, hX, _, hsub'⟩ := h
    exact ⟨X, hX, hW, fun i => (hsub' i).trans hsub⟩

end
end NeighborhoodSystem
end DomainTheory.NeighbourhoodSystems
end
```

PROPOSITION 7.10. The power domain $\mathbb{P}\mathcal{D}$ is a neighbourhood system if $\mathcal{D}$ is, and it is effectively given if $\mathcal{D}$ is.

Proof : The system $\mathcal{D}^\dagger$ is a neighbourhood system as we just remarked; indeed it is a positive neighbourhood system. It is easy to prove that the closure of any positive system under finite unions is a neighbourhood system, because the resulting family of sets is closed under *all* finite intersections. (If we left out the empty union, the result would be a positive system.) The proof is obvious since intersection of sets distributes over finite union. So $\mathbb{P}\mathcal{D}$ is a neighbourhood system.

For the second half of the proposition, we just have to constructivize the previous argument. Thus, if

$$\mathcal{D} = \{X_n \mid n \in \mathbb{N}\},$$

then the elements of $\mathbb{P}\mathcal{D}$ can be written as:

$$\bigcup_{i<q} (\downarrow X_{n_i}),$$

and hence are indexed by the finite sequences $\langle n_0, \ldots, n_{q-1}\rangle$ of integers. Now one of the standard devices of recursion theory is to put the finite sequences of integers into a recursive one-one correspondence with the integers themselves. This is the start of the recursive presentation of $\mathbb{P}\mathcal{D}$, since it means we can list effectively all the required neighbourhoods.

Next consider an intersection

$$\bigcup_{i<q} (\downarrow X_{n_i}) \cap \bigcup_{j<r} (\downarrow X_{m_j}) = \bigcup_{\substack{i<q \\ j<r}} \downarrow (X_{n_i} \cap X_{m_j}) \,.$$

Some of the terms which are $\emptyset$ have to be thrown out — but this requires only a finite number of decisions all computable by assumption. Now we have to rewrite

$$X_{n_i} \cap X_{m_j} = X_{k_{ij}} \,,$$

but the finding of k_{ij} is also computable. *Finally*, we have to re-order the doubly indexed sequence into a singly indexed sequence of length $q \cdot r$, but this is easily seen to be computable also. Therefore, intersections can be "calculated".

It remains to be shown that equality between neighbourhoods in $\mathbb{P}\mathcal{D}$ is decidable. The question really comes down to deciding something like:

$$\downarrow X_k \subseteq \bigcup_{i<q} \downarrow X_{n_i} \,.$$

Now since $X_k \in \downarrow X_k$, we find that the above is just equivalent to:

$$\exists i < q.\, X_k \subseteq X_{n_i} \,.$$

By our assumptions on $\mathcal{D}$, this is decidable. (It is this part of the argument that required the passage to $\mathcal{D}^\dagger$. It does not seem to be generally true that the closure under finite unions of an effectively given system is again effectively given.) $\square$

One of the main reasons that $\mathbb{P}\mathcal{D}$ is like a power domain is the possibility of forming "finite sets".

3.8.12 Definition 7.11 — finite sets of elements

Definition_7_11.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_10

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
namespace NeighborhoodSystem
section
variable {α : Type*} (V : NeighborhoodSystem α)

def PDfinJoin (n : ℕ) (xs : Fin n → V.Element) : V.PowerDomain.Element :=
  match n with
  | 0 => V.PDfinJoinZero
  | _m + 1 => V.PDfinJoinSucc xs

@[simp] theorem PDmem_finJoinZero {W : Set (Set α)} :
    (V.PDfinJoinZero).mem W ↔ W = V.PowerDomain.master := by
  rw [PDfinJoinZero, mem_bot, PowerDomain_master]

def PDsingleton (x : V.Element) : V.PowerDomain.Element := V.PDfinJoin 1 (fun (_ : Fin
     1) => x)

theorem PDmem_finJoinSucc {m : ℕ} (xs : Fin (m + 1) → V.Element) {W : Set (Set α)} :
    (V.PDfinJoinSucc xs).mem W ↔ V.PDmemFinJoin xs W := Iff.rfl
```

```
@[simp] theorem PDmem_singleton {x : V.Element} {W : Set (Set α)} :
    (V.PDsingleton x).mem W ↔
      ∃ X, x.mem X ∧ V.PowerDomain.mem W ∧ V.upSet X ⊆ W := by
  rw [PDsingleton, PDfinJoin, PDmem_finJoinSucc, PDmemFinJoin]
  constructor
  · rintro ⟨X, hX, hPD, hsub⟩
    exact ⟨X 0, hX 0, hPD, hsub 0⟩
  · rintro ⟨X, hX, hPD, hsub⟩
    refine ⟨fun _ => X, fun _ => hX, hPD, fun _ => hsub⟩

theorem PDmem_finJoin {n : ℕ} (xs : Fin n → V.Element) {W : Set (Set α)} :
    (V.PDfinJoin n xs).mem W ↔
      if n = 0 then W = V.PowerDomain.master else V.PDmemFinJoin xs W := by
  match n with
  | 0 => simp [PDfinJoin, PDfinJoinZero, mem_bot]
  | m + 1 => simp [PDfinJoin, PDfinJoinSucc]

theorem PDmem_finJoin_iUnion {m : ℕ} (xs : Fin (m + 1) → V.Element) {W : Set (Set α)}
    :
    (V.PDfinJoinSucc xs).mem W ↔
      ∃ (X : Fin (m + 1) → Set α) (_hX : ∀ i, (xs i).mem (X i)),
        V.PowerDomain.mem W ∧
          (⋃ i, V.upSet (X i)) ⊆ W := by
  rw [PDmem_finJoinSucc]
  constructor
  · rintro ⟨X, hX, hPD, hsub⟩
    exact ⟨X, hX, hPD, Set.iUnion_subset hsub⟩
  · rintro ⟨X, hX, hPD, hsub⟩
    exact ⟨X, hX, hPD, (Set.iUnion_subset_iff).mp hsub⟩

end

end NeighborhoodSystem
section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α β ? : Type*}

namespace NeighborhoodSystem

variable (V : NeighborhoodSystem α)

theorem PDmem_down {A : Set (Set α)} (hA : V.PDmem A) {Z X : Set α}
    (hZ : Z ∈ A) (hXZ : X ⊆ Z) (hX : V.mem X) : X ∈ A := by
  obtain ⟨L, hL, rfl⟩ := hA
  obtain ⟨X', hX', _, hZsub⟩ := (V.mem_PDunion).mp hZ
  exact (V.mem_PDunion).mpr ⟨X', hX', hX, hXZ.trans hZsub⟩

end NeighborhoodSystem
end

end DomainTheory.NeighbourhoodSystems
end
```

DEFINITION 7.11. For elements $x_0, \ldots, x_{n-1} \in |D|$ we define

$$\{x_0, \ldots, x_{n-1}\} = \{z \in \mathbb{P}D \mid \exists X_0 \in x_0 \ldots \exists X_{n-1} \in x_{n-1}.\ \bigcup_{i<n} (\uparrow X_i) \subseteq z\}.$$

(Note, we could also write $\forall i < n.\ X_i \in z$.) $\square$

3.8.13 Proposition 7.12 — finite sets are approximable

Proposition_7_12.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_4
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_11
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_4
public import Mathlib.Data.Fin.VecNotation

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap ApproximableMap₂ Domain.Recursive
namespace NeighborhoodSystem
variable {α : Type*} (V : NeighborhoodSystem α)

theorem PDsingleton_mono {X X' : Set α} (hX : V.mem X) (hX' : V.mem X') (hX'X : X' ⊆ X
    ) :
    V.PDsingleton (V.principal hX) ≤ V.PDsingleton (V.principal hX') := by
  intro W hW
  rw [PDmem_singleton] at hW ⊢
  obtain ⟨Y, hYpr, hPD, hsub⟩ := hW
  rw [mem_principal] at hYpr
  exact ⟨Y, ⟨hYpr.1, hX'X.trans hYpr.2⟩, hPD, hsub⟩

def PDsingletonApproxMap : ApproximableMap V V.PowerDomain :=
  ofMono (fun _X hX => V.PDsingleton (V.principal hX))
    (fun X X' hX hX' hX'X => @PDsingleton_mono α V X X' hX hX' hX'X)

@[simp] theorem PDsingletonApproxMap_rel {X : Set α} {W : Set (Set α)} (hX : V.mem X)
    :
    (PDsingletonApproxMap (V := V)).rel X W ↔ (V.PDsingleton (V.principal hX)).mem W
    := by
  dsimp [PDsingletonApproxMap, ofMono]
  constructor
  · intro ⟨_, h⟩; exact h
  · intro h; exact ⟨hX, h⟩

def PDsingletonMeet (a b : V.PowerDomain.Element) : V.PowerDomain.Element where
  mem W := a.mem W ∧ b.mem W
  sub h := a.sub h.1
  master_mem := ⟨a.master_mem, b.master_mem⟩
```

```
  inter_mem h1 h2 := ⟨a.inter_mem h1.1 h2.1, b.inter_mem h1.2 h2.2⟩
  up_mem h hW hsub := ⟨a.up_mem h.1 hW hsub, b.up_mem h.2 hW hsub⟩

@[simp] theorem PDsingletonMeet_mem {a b : V.PowerDomain.Element} {W : Set (Set α)} :
    (V.PDsingletonMeet a b).mem W ↔ a.mem W ∧ b.mem W := Iff.rfl

def PDfinJoinApproxMap₂ : ApproximableMap₂ V V V.PowerDomain where
  rel X Y W := (PDsingletonApproxMap (V := V)).rel X W ∧ (PDsingletonApproxMap (V := V
    )).rel Y W
  rel_dom₀ h := (PDsingletonApproxMap (V := V)).rel_dom h.1
  rel_dom₁ h := (PDsingletonApproxMap (V := V)).rel_dom h.2
  rel_cod h := (PDsingletonApproxMap (V := V)).rel_cod h.1
  master_rel := ⟨(PDsingletonApproxMap (V := V)).master_rel, (PDsingletonApproxMap (V
    := V)).master_rel⟩
  inter_right := fun ⟨h1, h2⟩ ⟨h1', h2'⟩ =>
    ⟨(PDsingletonApproxMap (V := V)).inter_right h1 h1',
      (PDsingletonApproxMap (V := V)).inter_right h2 h2'⟩
  mono := fun ⟨h1, h2⟩ hXX' hYY' hWW' hX' hY' hW' =>
    ⟨(PDsingletonApproxMap (V := V)).mono h1 hXX' hWW' hX' hW',
      (PDsingletonApproxMap (V := V)).mono h2 hYY' hWW' hY' hW'⟩

def finJoinMap_prod : ApproximableMap (prod V V) V.PowerDomain := ofMap₂ (
    PDfinJoinApproxMap₂ (V := V))

@[simp] theorem finJoinMap_prod_rel {X Y : Set α} (hX : V.mem X) (hY : V.mem Y) {W :
    Set (Set α)} :
    (finJoinMap_prod (V := V)).rel (prodNbhd X Y) W ↔
      (PDfinJoinApproxMap₂ (V := V)).rel X Y W := by
  dsimp [finJoinMap_prod, ofMap₂]
  simp only [inl_preimage_prodNbhd, inr_preimage_prodNbhd]
  exact ⟨fun ⟨_, h⟩ => h, fun h => ⟨prod_mem_prodNbhd hX hY, h⟩⟩

end NeighborhoodSystem
end

section
open NeighborhoodSystem ApproximableMap ApproximableMap₂ Domain.Recursive

namespace Counterexample712C

open NeighborhoodSystem

variable {? ? : Type*}

def HasTop (E : NeighborhoodSystem ?) : Prop := ∃ t : E.Element, ∀ x : E.Element, x ≤
    t

theorem ft_inter : ({false} : Set Bool) ∩ {true} = ∅ := by
  ext b
  simp only [Set.mem_inter_iff, Set.mem_singleton_iff, Set.mem_empty_iff_false,
    iff_false, not_and]
  rintro rfl h; exact absurd h (by decide)

def improperTop (E : NeighborhoodSystem ?)
    (hcl : ∀ {X Y : Set ?}, E.mem X → E.mem Y → E.mem (X ∩ Y)) : E.Element where
  mem := E.mem
```

```
  sub h := h
  master_mem := E.master_mem
  inter_mem h1 h2 := hcl h1 h2
  up_mem _ hY _ := hY

theorem tf_inter : ({true} : Set Bool) ∩ {false} = ∅ := by
  ext b
  simp only [Set.mem_inter_iff, Set.mem_singleton_iff, Set.mem_empty_iff_false,
    iff_false, not_and]
  rintro rfl h; exact absurd h (by decide)

def Vshape : NeighborhoodSystem Bool where
  mem X := X = Set.univ ∨ X = {true} ∨ X = {false}
  master := Set.univ
  master_nonempty := ⟨true, Set.mem_univ _⟩
  master_mem := Or.inl rfl
  sub_master _ := Set.subset_univ _
  inter_mem := by
    rintro X Y Z hX hY hZ hZsub

    have hZne : Z.Nonempty := by
      rcases hZ with rfl | rfl | rfl
      · exact ⟨true, Set.mem_univ true⟩
      · exact ⟨true, rfl⟩
      · exact ⟨false, rfl⟩
    obtain ⟨z, hz⟩ := hZne
    rcases hX with rfl | rfl | rfl <;> rcases hY with rfl | rfl | rfl
    · exact Or.inl (by rw [Set.inter_self])
    · exact Or.inr (Or.inl (by rw [Set.univ_inter]))
    · exact Or.inr (Or.inr (by rw [Set.univ_inter]))
    · exact Or.inr (Or.inl (by rw [Set.inter_univ]))
    · exact Or.inr (Or.inl (by rw [Set.inter_self]))
    · rw [tf_inter] at hZsub; exact absurd (hZsub hz) (Set.notMem_empty z)
    · exact Or.inr (Or.inr (by rw [Set.inter_univ]))
    · rw [ft_inter] at hZsub; exact absurd (hZsub hz) (Set.notMem_empty z)
    · exact Or.inr (Or.inr (by rw [Set.inter_self]))

end Counterexample712C
end

section
open NeighborhoodSystem ApproximableMap ApproximableMap₂ Domain.Recursive

namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

theorem PDext {a b : V.PowerDomain.Element} (h : ∀ W, a.mem W ↔ b.mem W) : a = b :=
  @Element.ext (Set α) V.PowerDomain a b h

end NeighborhoodSystem
end

section
open NeighborhoodSystem ApproximableMap ApproximableMap₂ Domain.Recursive
```

```
namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

variable (P : ComputablePresentation V)

theorem PDfinJoinApproxMap₂_rel_iff {X Y : Set α} (_hX : V.mem X) (_hY : V.mem Y) {W :
    Set (Set α)} :
    (PDfinJoinApproxMap₂ (V := V)).rel X Y W ↔
      (PDsingletonApproxMap (V := V)).rel X W ∧ (PDsingletonApproxMap (V := V)).rel Y
    W := Iff.rfl

end NeighborhoodSystem
end

section
open NeighborhoodSystem ApproximableMap ApproximableMap₂ Domain.Recursive

namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

theorem PDfinJoin_pair (x y : V.Element) :
    V.PDfinJoin 2 ![x, y] = V.PDsingletonMeet (V.PDsingleton x) (V.PDsingleton y) :=
    by
  apply PDext
  intro W
  simp only [PDsingletonMeet_mem, PDmem_singleton, PDfinJoin, PDmem_finJoinSucc,
    PDmemFinJoin]
  constructor
  · rintro ⟨X, hX, hPD, hsub⟩
    exact ⟨⟨X 0, hX 0, hPD, hsub 0⟩, ⟨X 1, hX 1, hPD, hsub 1⟩⟩
  · rintro ⟨⟨X0, hx, hPD, hsub0⟩, ⟨X1, hy, _, hsub1⟩⟩
    refine ⟨![X0, X1], ?_, hPD, ?_⟩
    · intro i; fin_cases i <;> assumption
    · intro i; fin_cases i <;> assumption

theorem PDfinJoin_inter_two (x y : V.Element) {W : Set (Set α)} :
    (V.PDfinJoin 2 ![x, y]).mem W ↔
      (V.PDsingleton x).mem W ∧ (V.PDsingleton y).mem W := by
  rw [← PDsingletonMeet_mem, ← PDfinJoin_pair]

end NeighborhoodSystem
end

section
open NeighborhoodSystem ApproximableMap ApproximableMap₂ Domain.Recursive

namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

variable (P : ComputablePresentation V)

theorem PDfinJoinApproxMap₂_rel_PD {X Y : Set α} (hX : V.mem X) (hY : V.mem Y) {W : Set
     (Set α)} :
```

```
    (PDfinJoinApproxMap₂ (V := V)).rel X Y W ↔
      (V.PDfinJoin 2 ![V.principal hX, V.principal hY]).mem W := by
  constructor
  · intro ⟨h1, h2⟩
    rw [PDsingletonApproxMap_rel (hX := hX)] at h1
    rw [PDsingletonApproxMap_rel (hX := hY)] at h2
    exact (PDfinJoin_inter_two (x := V.principal hX) (y := V.principal hY)).2 ⟨h1, h2⟩
  · intro h
    rcases (PDfinJoin_inter_two (x := V.principal hX) (y := V.principal hY)).1 h with ⟨
    h1, h2⟩
    exact ⟨by rw [PDsingletonApproxMap_rel (hX := hX)]; exact h1,
      by rw [PDsingletonApproxMap_rel (hX := hY)]; exact h2⟩

theorem PDsingletonApproxMap_rel_Ypd_iff {n k : ℕ} :
    ((PDsingletonApproxMap (V := V))).rel (P.X n) (V.Ypd P k) ↔
      ∃ b ∈ decodeList k, P.X n ⊆ P.X b := by
  rw [PDsingletonApproxMap_rel (hX := P.mem_X n), PDmem_singleton, PowerDomain_mem]
  constructor
  · rintro ⟨Y, hYpr, _, hsub⟩
    have hn : P.X n ∈ V.upSet Y := ⟨P.mem_X n, hYpr.2⟩
    obtain ⟨b, hb, hPab⟩ := (V.mem_Ypd P).mp (hsub hn)
    exact ⟨b, hb, hPab.2⟩
  · intro ⟨b, hb, hnb⟩
    refine ⟨P.X b, ⟨P.mem_X b, hnb⟩, V.Ypd_isPDmem P k,
      (V.upSet_subset_Ypd_iff P).mpr ⟨b, hb, subset_rfl⟩⟩

end NeighborhoodSystem
end

section
open NeighborhoodSystem ApproximableMap ApproximableMap₂ Domain.Recursive

namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

theorem PDsingletonApproxMap_toElementMap (x : V.Element) :
    (PDsingletonApproxMap (V := V)).toElementMap x = V.PDsingleton x := by
  apply PDext
  intro W
  rw [ApproximableMap.mem_toElementMap, PDmem_singleton]
  constructor
  · rintro ⟨X, hxX, hrel⟩
    rw [PDsingletonApproxMap_rel (hX := x.sub hxX)] at hrel
    rw [PDmem_singleton] at hrel
    obtain ⟨Y, ⟨hYmem, hXY⟩, hPD, hsub⟩ := hrel
    exact ⟨Y, x.up_mem hxX hYmem hXY, hPD, hsub⟩
  · intro hW
    obtain ⟨Y, hy, hPD, hsub⟩ := hW
    refine ⟨Y, hy, ?_⟩
    rw [PDsingletonApproxMap_rel (hX := x.sub hy), PDmem_singleton]
    exact ⟨Y, ⟨x.sub hy, subset_rfl⟩, hPD, hsub⟩

theorem PDfinJoinApproxMap₂_toElementMap (x y : V.Element) :
    (PDfinJoinApproxMap₂ (V := V)).toElementMap₂ x y = V.PDfinJoin 2 ![x, y] := by
  apply PDext
```

```
  intro W
  rw [PDfinJoin_inter_two, ApproximableMap₂.mem_toElementMap₂]
  constructor
  · rintro ⟨X, Y, hxX, hyY, ⟨h1, h2⟩⟩
    constructor
    · rw [← PDsingletonApproxMap_toElementMap (V := V)]
      exact (ApproximableMap.mem_toElementMap (PDsingletonApproxMap (V := V)) x).mpr ⟨X
    , hxX, h1⟩
    · rw [← PDsingletonApproxMap_toElementMap (V := V)]
      exact (ApproximableMap.mem_toElementMap (PDsingletonApproxMap (V := V)) y).mpr ⟨Y
    , hyY, h2⟩
  · intro ⟨h1, h2⟩
    rw [← PDsingletonApproxMap_toElementMap (V := V)] at h1 h2
    obtain ⟨X, hxX, hrelX⟩ :=
      (ApproximableMap.mem_toElementMap (PDsingletonApproxMap (V := V)) x).mp h1
    obtain ⟨Y, hyY, hrelY⟩ :=
      (ApproximableMap.mem_toElementMap (PDsingletonApproxMap (V := V)) y).mp h2
    exact ⟨X, Y, hxX, hyY, hrelX, hrelY⟩

theorem PDsingleton_principal {X : Set α} (hX : V.mem X) :
    V.PDsingleton (V.principal hX) =
      V.PowerDomain.principal (V.PDmem_upSet hX) := by
  apply PDext
  intro W
  rw [PDmem_singleton, mem_principal, PowerDomain_mem]
  constructor
  · rintro ⟨Y, ⟨hYmem, hXY⟩, hPD, hsub⟩
    exact ⟨hPD, ((V.upSet_subset_iff hX).mpr hXY).trans hsub⟩
  · rintro ⟨hPD, hsub⟩
    exact ⟨X, ⟨hX, subset_rfl⟩, hPD, hsub⟩

end NeighborhoodSystem
end

section
open NeighborhoodSystem ApproximableMap ApproximableMap₂ Domain.Recursive

namespace Counterexample712C

open NeighborhoodSystem

variable {? ? : Type*}

theorem Vshape_mem_false : Vshape.mem {false} := Or.inr (Or.inr rfl)

theorem Vshape_mem_true : Vshape.mem {true} := Or.inr (Or.inl rfl)

theorem Vshape_not_mem_empty : ¬ Vshape.mem (∅ : Set Bool) := by
  rintro (h | h | h)
  · exact Set.empty_ne_univ h
  · exact absurd h.symm (Set.singleton_ne_empty true)
  · exact absurd h.symm (Set.singleton_ne_empty false)

theorem Vshape_not_hasTop : ¬ HasTop Vshape := by
  rintro ⟨t, ht⟩
  have htt : t.mem {true} :=
```

```
    ht (Vshape.principal Vshape_mem_true) {true} ⟨Vshape_mem_true, subset_rfl⟩
  have htf : t.mem {false} :=
    ht (Vshape.principal Vshape_mem_false) {false} ⟨Vshape_mem_false, subset_rfl⟩
  have hint : t.mem (({true} : Set Bool) ∩ {false}) := t.inter_mem htt htf
  rw [tf_inter] at hint
  exact Vshape_not_mem_empty (t.sub hint)

end Counterexample712C
end

section
open NeighborhoodSystem ApproximableMap ApproximableMap₂ Domain.Recursive

namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

theorem ext_of_principal {β : Type*} {W : NeighborhoodSystem β}
    {f g : ApproximableMap V W}
    (h : ∀ (X : Set α) (hX : V.mem X),
      f.toElementMap (V.principal hX) = g.toElementMap (V.principal hX)) : f = g := by
  apply ApproximableMap.ext
  intro X Y
  constructor
  · intro hr
    have hX := f.rel_dom hr
    rw [g.rel_iff_mem_principal hX, ← h X hX, ← f.rel_iff_mem_principal hX]; exact hr
  · intro hr
    have hX := g.rel_dom hr
    rw [f.rel_iff_mem_principal hX, h X hX, ← g.rel_iff_mem_principal hX]; exact hr

theorem finJoinMap_prod_toElementMap (x y : V.Element) :
    (finJoinMap_prod (V := V)).toElementMap (pair x y) = V.PDfinJoin 2 ![x, y] := by
  have hmap : toMap₂ (finJoinMap_prod (V := V)) = PDfinJoinApproxMap₂ (V := V) := toMap
    ₂_ofMap₂ _
  rw [← toElementMap₂_toMap₂ (finJoinMap_prod (V := V)), hmap, PDfinJoinApproxMap₂
    _toElementMap]

end NeighborhoodSystem
end

section
open NeighborhoodSystem ApproximableMap ApproximableMap₂ Domain.Recursive

namespace Counterexample712C

open NeighborhoodSystem

variable {? ? : Type*}

theorem hasTop_of_inter_closed (E : NeighborhoodSystem ?)
    (hcl : ∀ {X Y : Set ?}, E.mem X → E.mem Y → E.mem (X ∩ Y)) : HasTop E :=
  ⟨improperTop E hcl, fun x _X hX => x.sub hX⟩

theorem hasTop_of_iso {D : NeighborhoodSystem ?} {D' : NeighborhoodSystem ?}
    (e : D.Element ≃o D'.Element) (h : HasTop D') : HasTop D := by
```

```
  obtain ⟨t, ht⟩ := h
  refine ⟨e.symm t, fun x => ?_⟩
  rw [← e.le_iff_le, e.apply_symm_apply]
  exact ht (e x)

theorem powerDomain_hasTop (V : NeighborhoodSystem ?) : HasTop V.PowerDomain :=
  hasTop_of_inter_closed V.PowerDomain (fun hX hY => V.PDmem_inter hX hY)

end Counterexample712C
end

section
open NeighborhoodSystem ApproximableMap ApproximableMap₂ Domain.Recursive

namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

variable (P : ComputablePresentation V)

theorem singleton_isComputable (cons : ℕ → ℕ) (hconsp : Nat.Primrec cons)
    (hcons : ∀ a b, cons (Nat.pair a b) = 1 ↔ ∃ k, P.X k ⊆ P.X a ∩ P.X b) :
    ComputableMap P (V.PDPresentation P cons hconsp hcons) ((PDsingletonApproxMap (V
    := V))) := by
  constructor
  have h := P.incl_computable.swap.bExistsList.swap
  refine (RecDecidable.of_iff (fun s => ?_) h).re
  show PDsingletonApproxMap (V := V).rel (P.X s.unpair.1) ((V.PDPresentation P cons
    hconsp hcons).X s.unpair.2) ↔
      ∃ e ∈ decodeList s.unpair.2, P.X s.unpair.1 ⊆ P.X e
  simp only [PDPresentation]
  apply PDsingletonApproxMap_rel_Ypd_iff (V := V)

theorem PDfinJoinApproxMap₂_isComputable (cons : ℕ → ℕ) (hconsp : Nat.Primrec cons)
    (hcons : ∀ a b, cons (Nat.pair a b) = 1 ↔ ∃ k, P.X k ⊆ P.X a ∩ P.X b) :
    ComputableMap (prodPresentation P P)
      (V.PDPresentation P cons hconsp hcons) (finJoinMap_prod (V := V)) := by
  constructor
  have hs : REPred (fun s => (PDsingletonApproxMap (V := V)).rel (P.X s.unpair.1) (V.
    Ypd P s.unpair.2)) :=
    (singleton_isComputable (V := V) P cons hconsp hcons).out
  have hra : Nat.Primrec (fun t => Nat.pair t.unpair.1.unpair.1 t.unpair.2) :=
    (Nat.Primrec.left.comp Nat.Primrec.left).pair Nat.Primrec.right
  have hrb : Nat.Primrec (fun t => Nat.pair t.unpair.1.unpair.2 t.unpair.2) :=

    (Nat.Primrec.right.comp Nat.Primrec.left).pair Nat.Primrec.right
  refine REPred.of_iff (fun t => by
    dsimp [prodPresentation_X, finJoinMap_prod, ofMap₂]
    simp only [inl_preimage_prodNbhd, inr_preimage_prodNbhd,
      PDPresentation, unpair_pair_fst, unpair_pair_snd]
    constructor
    · rintro ⟨_, ⟨h1, h2⟩⟩
      exact ⟨h1, h2⟩
    · intro ⟨h1, h2⟩
      refine ⟨prod_mem_prodNbhd (P.mem_X _) (P.mem_X _), h1, h2⟩) ((hs.comp hra).and (
    hs.comp hrb))
```

```
end NeighborhoodSystem
end

section
open NeighborhoodSystem ApproximableMap ApproximableMap₂ Domain.Recursive

namespace Counterexample712C

open NeighborhoodSystem

variable {? ? : Type*}

theorem subsystem_inter_closed {D E : NeighborhoodSystem ?} (h : D ? E)
    (hE : ∀ {X Y : Set ?}, E.mem X → E.mem Y → E.mem (X ∩ Y))
    {X Y : Set ?} (hX : D.mem X) (hY : D.mem Y) : D.mem (X ∩ Y) :=
  h.inter_closed hX hY (hE (h.sub hX) (h.sub hY))

theorem hasTop_of_trianglelefteq_powerDomain {D : NeighborhoodSystem ?} {E :
    NeighborhoodSystem ?}
    (h : D ? E.PowerDomain) : HasTop D := by
  obtain ⟨D', hsub, ⟨e⟩⟩ := h
  have hPcl : ∀ {X Y : Set (Set ?)}, E.PowerDomain.mem X → E.PowerDomain.mem Y →
      E.PowerDomain.mem (X ∩ Y) := fun hX hY => E.PDmem_inter hX hY
  exact hasTop_of_iso e (hasTop_of_inter_closed D' (subsystem_inter_closed hsub hPcl))

theorem vshape_not_trianglelefteq_powerDomain : ¬ (Vshape ? Vshape.PowerDomain) := fun
    h =>
  Vshape_not_hasTop (hasTop_of_trianglelefteq_powerDomain h)

end Counterexample712C
end

section
set_option linter.unusedVariables false

theorem theorem_712.{u_1} : And
  (And
    (And
      (And
        (And
          (And
            (And
              (And
                (And
                  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α)
                    (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α V),
                    @Eq
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     (Set α)
                        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    PowerDomain α V))
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.
```

```
toElementMap₂ α α (Set α) V V
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) x y)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoin α V
                      (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                        (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
x
                        (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                          (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))
) y
                          (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V))))))
                (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V) (cons : Nat → Nat)
                  (hconsp : Nat.Primrec cons)
                  (hcons :
                    ∀ (a b : Nat),
                      Iff (@Eq Nat (cons (Nat.pair a b)) (@OfNat.ofNat Nat (
nat_lit 1) (instOfNatNat (nat_lit 1))))
                        (∃ (k : Nat),
                          @LE.le (Set α) (@Set.instLE α)
                            (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
                            (@Inter.inter (Set α) (@Set.instInter α)
                              (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P a)
                              (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P b)))),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α α) (Set
α)
                    (@DomainTheory.NeighbourhoodSystems.prod α α V V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.prodPresentation α α V V P
 P)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P cons hconsp hcons)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
finJoinMap_prod α V)))
              (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α) {X Y : Set α},
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y
→
                    ∀ {W : Set (Set α)},
                      Iff
                        (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel α
α (Set α) V V
```

```
                          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) X Y W)
                        (And
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) X W)
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) Y W))))
            (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
              (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α V) {W : Set (Set α)},
              Iff
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
 (Set α)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin
 α V
                    (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                    (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                      (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                        (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))
y
                        (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
                  W)
                (And
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V x) W)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V y) W))))
            (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
              (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
 V),
```

```
            @Eq
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set
α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin α V
                (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                  (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
                  (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                    (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))) y
                    (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonMeet α V
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
 α V x)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
 α V y))))
        (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
          (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V) {n k
 : Nat},
          Iff
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α (Set α) V
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonApproxMap α V)
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P n
)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P k))
            (∃ (b : Nat),
              And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (
Domain.Recursive.decodeList k) b)
                (@LE.le (Set α) (@Set.instLE α)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P n)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P b)))))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α)
        (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α (Set
α) V
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonApproxMap α V) x)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V x
```

```
)))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
 {X X' : Set α}
      (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X)
      (hX' : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X'),
      @LE.le (Set α) (@Set.instLE α) X' X →
        @LE.le
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@Preorder.toLE
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V))
            (@PartialOrder.toPreorder
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set
α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement (Set α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X
 hX))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X
' hX'))))
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
X : Set α}
    (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V))
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X hX)
)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal (Set α)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V X)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDmem_upSet α V X
hX))))
(∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V) (cons : Nat
→ Nat) (hconsp : Nat.Primrec cons)
  (hcons :
    ∀ (a b : Nat),
      Iff (@Eq Nat (cons (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
instOfNatNat (nat_lit 1))))
        (∃ (k : Nat),
          @LE.le (Set α) (@Set.instLE α) (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
            (@Inter.inter (Set α) (@Set.instInter α)
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P a
)
```

```
                (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P b
  ))))),
    @DomainTheory.NeighbourhoodSystems.ComputableMap α (Set α) V
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V) P
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation α V P
  cons hconsp hcons)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingletonApproxMap α
  V)))
(Not
  (@DomainTheory.NeighbourhoodSystems.Trianglelefteq Bool (Set Bool)
    DomainTheory.NeighbourhoodSystems.Counterexample712C.Vshape
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain Bool
      DomainTheory.NeighbourhoodSystems.Counterexample712C.Vshape))) :=
@And.intro
(And
  (And
    (And
      (And
        (And
          (And
            (And
              (And
                (And
                  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α)
                    (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α V),
                    @Eq
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
   (Set α)
                        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  PowerDomain α V))
                      (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.
  toElementMap₂ α α (Set α) V V
                        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  PowerDomain α V)
                        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  PDfinJoinApproxMap₂ α V) x y)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  PDfinJoin α V
                        (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                        (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
                          (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
  x
                          (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V)
                            (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))
  ) y
                            (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α V))))))
                  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α)
                    (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
   V) (cons : Nat → Nat)
                    (hconsp : Nat.Primrec cons)
```

```
                  (hcons :
                    ∀ (a b : Nat),
                      Iff (@Eq Nat (cons (Nat.pair a b)) (@OfNat.ofNat Nat (
nat_lit 1) (instOfNatNat (nat_lit 1))))
                        (∃ (k : Nat),
                          @LE.le (Set α) (@Set.instLE α)
                            (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
                            (@Inter.inter (Set α) (@Set.instInter α)
                              (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P a)
                              (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P b)))),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α α) (Set
α)
                    (@DomainTheory.NeighbourhoodSystems.prod α α V V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.prodPresentation α α V V P
 P)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P cons hconsp hcons)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
finJoinMap_prod α V)))
                (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α) {X Y : Set α},
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
                    @DomainTheory.NeighbourhoodSystem.mem α V Y
→
                      ∀ {W : Set (Set α)},
                        Iff
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel α
α (Set α) V V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) X Y W)
                          (And
                            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) X W)
                            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) Y W))))
              (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α V) {W : Set (Set α)},
                Iff
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
```

```
 (Set α)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin
 α V
                    (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                    (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                      (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                        (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))
y
                        (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
                  W)
                (And
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V x) W)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V y) W))))
           (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
             (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
 V),
             @Eq
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set
α)
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin α V
                 (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                 (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                   (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
                   (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                     (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))) y
                     (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonMeet α V
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
 α V x)
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
 α V y))))
         (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
```

```
          (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V) {n k
 : Nat},
          Iff
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α (Set α) V
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonApproxMap α V)
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P n
)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P k))
            (∃ (b : Nat),
              And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (
Domain.Recursive.decodeList k) b)
                (@LE.le (Set α) (@Set.instLE α)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P n)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P b)))))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α)
        (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α (Set
α) V
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonApproxMap α V) x)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V x
)))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
 {X X' : Set α}
      (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X)
      (hX' : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X'),
      @LE.le (Set α) (@Set.instLE α) X' X →
        @LE.le
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@Preorder.toLE
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V))
            (@PartialOrder.toPreorder
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set
α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement (Set α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))))
```

```
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X
 hX))
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X
' hX'))))
   (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
X : Set α}
     (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X),
     @Eq
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V))
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X hX)
)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal (Set α)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V X)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDmem_upSet α V X
hX))))
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
    (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V) (cons : Nat
→ Nat) (hconsp : Nat.Primrec cons)
    (hcons :
      ∀ (a b : Nat),
        Iff (@Eq Nat (cons (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
instOfNatNat (nat_lit 1))))
          (∃ (k : Nat),
            @LE.le (Set α) (@Set.instLE α) (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
              (@Inter.inter (Set α) (@Set.instInter α)
                (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P a
)
                (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P b
)))),
    @DomainTheory.NeighbourhoodSystems.ComputableMap α (Set α) V
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V) P
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation α V P
cons hconsp hcons)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingletonApproxMap α
V)))
(Not
  (@DomainTheory.NeighbourhoodSystems.Trianglelefteq Bool (Set Bool)
    DomainTheory.NeighbourhoodSystems.Counterexample712C.Vshape
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain Bool
      DomainTheory.NeighbourhoodSystems.Counterexample712C.Vshape)))
(@And.intro
  (And
    (And
      (And
        (And
          (And
            (And
              (And
                (And
                  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
```

```
NeighborhoodSystem α)
                  (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V),
                  @Eq
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 (Set α)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V))
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.
toElementMap₂ α α (Set α) V V
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) x y)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoin α V
                      (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                        (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
x
                        (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                          (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))
) y
                          (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V))))))
                (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V) (cons : Nat → Nat)
                  (hconsp : Nat.Primrec cons)
                  (hcons :


                    ∀ (a b : Nat),
                      Iff (@Eq Nat (cons (Nat.pair a b)) (@OfNat.ofNat Nat (
nat_lit 1) (instOfNatNat (nat_lit 1))))
                        (∃ (k : Nat),
                          @LE.le (Set α) (@Set.instLE α)
                            (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
                            (@Inter.inter (Set α) (@Set.instInter α)
                              (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P a)
                              (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P b)))),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α α) (Set
α)
                    (@DomainTheory.NeighbourhoodSystems.prod α α V V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.prodPresentation α α V V P
 P)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P cons hconsp hcons)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
```

```
finJoinMap_prod α V)))
              (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α) {X Y : Set α},
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y
→
                    ∀ {W : Set (Set α)},
                      Iff
                        (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel α
α (Set α) V V
                          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) X Y W)
                        (And
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) X W)
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) Y W))))
            (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
              (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α V) {W : Set (Set α)},
              Iff
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
 (Set α)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin
 α V
                    (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                    (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                      (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                        (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))
y
                        (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
                  W)
                (And
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V x) W)
```

```
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V y) W))))
          (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
           (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
 V),
           @Eq
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set
α)
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin α V
               (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
               (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                 (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
                 (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                   (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))) y
                   (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonMeet α V
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
 α V x)
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
 α V y))))
        (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
         (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V) {n k
 : Nat},
         Iff
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α (Set α) V
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonApproxMap α V)
             (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P n
)
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P k))
           (∃ (b : Nat),
             And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (
Domain.Recursive.decodeList k) b)
               (@LE.le (Set α) (@Set.instLE α)
                 (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P n)
                 (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P b)))))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α)
        (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
        @Eq
```

```
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α (Set
α) V
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonApproxMap α V) x)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V x
)))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
 {X X' : Set α}
      (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X)
      (hX' : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X'),
      @LE.le (Set α) (@Set.instLE α) X' X →
        @LE.le
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@Preorder.toLE
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V))
            (@PartialOrder.toPreorder
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set
α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement (Set α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X
 hX))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X
' hX'))))
  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
X : Set α}
    (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V))
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X hX)
)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal (Set α)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V X)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDmem_upSet α V X
hX))))
(∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V) (cons : Nat
→ Nat) (hconsp : Nat.Primrec cons)
```

```
   (hcons :
     ∀ (a b : Nat),
       Iff (@Eq Nat (cons (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
instOfNatNat (nat_lit 1))))
         (∃ (k : Nat),
           @LE.le (Set α) (@Set.instLE α) (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
             (@Inter.inter (Set α) (@Set.instInter α)
               (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P a
)
               (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P b
)))),
   @DomainTheory.NeighbourhoodSystems.ComputableMap α (Set α) V
     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V) P
     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation α V P
cons hconsp hcons)
     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingletonApproxMap α
V))
 (@And.intro
   (And
     (And
       (And
         (And
           (And
             (And
               (And
                 (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                   (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V),
                   @Eq
                     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 (Set α)
                       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V))
                     (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.
toElementMap₂ α α (Set α) V V
                       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) x y)
                     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoin α V
                       (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                       (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                         (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
x
                         (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                           (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))
) y
                           (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V))))))
                 (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
```

```
                  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V) (cons : Nat → Nat)
                  (hconsp : Nat.Primrec cons)
                  (hcons :
                    ∀ (a b : Nat),
                      Iff (@Eq Nat (cons (Nat.pair a b)) (@OfNat.ofNat Nat (
nat_lit 1) (instOfNatNat (nat_lit 1))))
                        (∃ (k : Nat),
                          @LE.le (Set α) (@Set.instLE α)
                            (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
                            (@Inter.inter (Set α) (@Set.instInter α)
                              (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P a)
                              (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P b)))),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α α) (Set
α)
                    (@DomainTheory.NeighbourhoodSystems.prod α α V V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.prodPresentation α α V V P
 P)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P cons hconsp hcons)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
finJoinMap_prod α V)))
              (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α) {X Y : Set α},
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y
→
                    ∀ {W : Set (Set α)},
                      Iff
                        (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel α
α (Set α) V V
                          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) X Y W)
                        (And
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) X W)
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) Y W))))
            (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
              (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
```

```
 α V) {W : Set (Set α)},
              Iff
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
 (Set α)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin
 α V
                    (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                    (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                      (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                        (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))
y
                        (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
                  W)
                (And
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V x) W)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V y) W))))
           (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
             (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
 V),
             @Eq
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set
α)
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin α V
                 (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                 (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                   (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
                   (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                     (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))) y
                     (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonMeet α V
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
 α V x)
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
```

```
 α V y))))
        (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
          (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V) {n k
 : Nat},
          Iff
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α (Set α) V
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonApproxMap α V)
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P n
)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P k))
            (∃ (b : Nat),
              And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (
Domain.Recursive.decodeList k) b)
                (@LE.le (Set α) (@Set.instLE α)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P n)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P b)))))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α)
        (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α (Set
α) V
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonApproxMap α V) x)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V x
)))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
 {X X' : Set α}
      (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X)
      (hX' : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X'),
      @LE.le (Set α) (@Set.instLE α) X' X →
        @LE.le
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@Preorder.toLE
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V))
            (@PartialOrder.toPreorder
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set
α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
```

```
instPartialOrderElement (Set α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))))
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X
 hX))
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X
' hX'))))
   (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {
X : Set α}
     (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X),
     @Eq
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V))
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X hX)
)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal (Set α)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V X)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDmem_upSet α V X
hX)))
   (@And.intro
     (And
       (And
         (And
           (And
             (And
               (And
                 (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                  (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V),
                  @Eq
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 (Set α)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V))
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.
toElementMap₂ α α (Set α) V V
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) x y)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoin α V
                      (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                        (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
x
                        (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                          (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))
) y
```

```
                          (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V))))))
                (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                 (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V) (cons : Nat → Nat)
                 (hconsp : Nat.Primrec cons)
                 (hcons :
                   ∀ (a b : Nat),
                     Iff (@Eq Nat (cons (Nat.pair a b)) (@OfNat.ofNat Nat (
nat_lit 1) (instOfNatNat (nat_lit 1))))
                         (∃ (k : Nat),
                           @LE.le (Set α) (@Set.instLE α)
                             (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
                             (@Inter.inter (Set α) (@Set.instInter α)
                               (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P a)
                               (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P b)))),
                 @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α α) (Set
α)
                   (@DomainTheory.NeighbourhoodSystems.prod α α V V)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                   (@DomainTheory.NeighbourhoodSystems.prodPresentation α α V V P
 P)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P cons hconsp hcons)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
finJoinMap_prod α V)))
              (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α) {X Y : Set α},
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y
→
                    ∀ {W : Set (Set α)},
                      Iff
                        (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel α
α (Set α) V V
                          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) X Y W)
                        (And
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) X W)
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
```

```
.PDsingletonApproxMap α V) Y W))))
            (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
              (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α V) {W : Set (Set α)},
              Iff
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
 (Set α)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin
 α V
                    (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                    (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                      (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                        (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))
y
                        (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
                  W)
                (And
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V x) W)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V y) W))))
          (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
            (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
 V),
            @Eq
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set
α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin α V
                (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                  (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
                  (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                    (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))) y
                    (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
```

```
PDsingletonMeet α V
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
 α V x)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
 α V y))))
        (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
          (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V) {n k
 : Nat},
          Iff
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α (Set α) V
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonApproxMap α V)
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P n
)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P k))
            (∃ (b : Nat),
              And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (
Domain.Recursive.decodeList k) b)
                (@LE.le (Set α) (@Set.instLE α)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P n)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P b)))))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α)
        (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α (Set
α) V
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonApproxMap α V) x)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V x
)))
    (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α)
 {X X' : Set α}
      (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X)
      (hX' : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X'),
      @LE.le (Set α) (@Set.instLE α) X' X →
        @LE.le
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@Preorder.toLE
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V))
            (@PartialOrder.toPreorder
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set
```

```
α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
instPartialOrderElement (Set α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))))

          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X
 hX))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α V X
' hX')))
    (@And.intro
      (And
        (And
          (And
            (And
              (And
                (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                  (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V),
                  @Eq
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 (Set α)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V))
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.
toElementMap₂ α α (Set α) V V
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) x y)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoin α V
                      (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                        (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
x
                        (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                          (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))
) y
                          (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V))))))
                (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V) (cons : Nat → Nat)
                  (hconsp : Nat.Primrec cons)
                  (hcons :
                    ∀ (a b : Nat),
                      Iff (@Eq Nat (cons (Nat.pair a b)) (@OfNat.ofNat Nat (
```

```
nat_lit 1) (instOfNatNat (nat_lit 1))))
                          (∃ (k : Nat),
                            @LE.le (Set α) (@Set.instLE α)
                              (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
                              (@Inter.inter (Set α) (@Set.instInter α)
                                (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P a)
                                (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P b)))),
                    @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α α) (Set
α)
                      (@DomainTheory.NeighbourhoodSystems.prod α α V V)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                      (@DomainTheory.NeighbourhoodSystems.prodPresentation α α V V P
 P)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P cons hconsp hcons)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
finJoinMap_prod α V)))
                (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α) {X Y : Set α},
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y
→
                      ∀ {W : Set (Set α)},
                        Iff
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel α
α (Set α) V V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) X Y W)
                          (And
                            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) X W)
                            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) Y W))))
              (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α V) {W : Set (Set α)},
                Iff
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
 (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
```

```
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin
 α V
                    (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                    (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                      (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                        (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))
y
                        (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
                  W)
                (And
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V x) W)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V y) W))))
          (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
            (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
 V),
            @Eq
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set
α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin α V
                (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                  (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
                  (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                    (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))) y
                    (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonMeet α V
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
 α V x)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
 α V y))))
        (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
          (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V) {n k
 : Nat},
          Iff
```

```
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α (Set α) V
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonApproxMap α V)
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P n
)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P k))
            (∃ (b : Nat),
              And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (
Domain.Recursive.decodeList k) b)
                (@LE.le (Set α) (@Set.instLE α)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P n)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P b)))))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α)
        (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α V),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α (Set
α) V
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonApproxMap α V) x)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton α V x
))
      (@And.intro
        (And
          (And
            (And
              (And
                (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                  (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V),
                  @Eq
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 (Set α)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V))
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.
toElementMap₂ α α (Set α) V V
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) x y)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoin α V
                      (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
```

```
                        (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
x
                        (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                          (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))
) y
                          (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V))))))
                (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                 (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V) (cons : Nat → Nat)
                 (hconsp : Nat.Primrec cons)
                 (hcons :
                   ∀ (a b : Nat),
                     Iff (@Eq Nat (cons (Nat.pair a b)) (@OfNat.ofNat Nat (
nat_lit 1) (instOfNatNat (nat_lit 1))))
                       (∃ (k : Nat),
                         @LE.le (Set α) (@Set.instLE α)
                           (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
                           (@Inter.inter (Set α) (@Set.instInter α)
                             (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P a)
                             (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P b)))),
                 @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α α) (Set
α)
                   (@DomainTheory.NeighbourhoodSystems.prod α α V V)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                   (@DomainTheory.NeighbourhoodSystems.prodPresentation α α V V P
 P)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P cons hconsp hcons)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
finJoinMap_prod α V)))
              (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α) {X Y : Set α},
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y
→
                    ∀ {W : Set (Set α)},
                      Iff
                        (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel α
α (Set α) V V
                          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) X Y W)
                        (And
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
```

```
.PDsingletonApproxMap α V) X W)
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) Y W))))
            (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
             (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α V) {W : Set (Set α)},
             Iff
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
 (Set α)
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin
 α V
                   (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                   (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                     (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
                     (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                       (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))
y
                       (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
                 W)
               (And
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V x) W)
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V y) W))))
          (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
           (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
 V),
           @Eq
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set
α)
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin α V
               (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
               (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                 (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
```

```
                  (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                    (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))) y
                    (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonMeet α V
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
 α V x)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
 α V y))))
        (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
          (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V) {n k
 : Nat},
          Iff
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α (Set α) V
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonApproxMap α V)
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P n
)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P k))
            (∃ (b : Nat),
              And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (
Domain.Recursive.decodeList k) b)
                (@LE.le (Set α) (@Set.instLE α)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P n)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P b))))
        (@And.intro
          (And
            (And
              (And
                (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                  (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V),
                  @Eq
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 (Set α)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V))
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.
toElementMap₂ α α (Set α) V V
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) x y)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoin α V
                      (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
```

```
                        (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
x
                        (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                          (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))
) y
                          (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V))))))
                (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                 (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V) (cons : Nat → Nat)
                 (hconsp : Nat.Primrec cons)
                 (hcons :
                   ∀ (a b : Nat),
                     Iff (@Eq Nat (cons (Nat.pair a b)) (@OfNat.ofNat Nat (
nat_lit 1) (instOfNatNat (nat_lit 1))))
                       (∃ (k : Nat),
                         @LE.le (Set α) (@Set.instLE α)
                           (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
                           (@Inter.inter (Set α) (@Set.instInter α)
                             (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P a)
                             (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P b)))),
                 @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α α) (Set
α)
                   (@DomainTheory.NeighbourhoodSystems.prod α α V V)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                   (@DomainTheory.NeighbourhoodSystems.prodPresentation α α V V P
 P)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P cons hconsp hcons)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
finJoinMap_prod α V)))
              (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α) {X Y : Set α},
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y
→
                    ∀ {W : Set (Set α)},
                      Iff
                        (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel α
α (Set α) V V
                          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) X Y W)
                        (And
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
```

```
.PDsingletonApproxMap α V) X W)
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) Y W))))
            (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
             (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α V) {W : Set (Set α)},
             Iff
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
 (Set α)
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin
 α V
                   (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                   (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                     (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
                     (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                       (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))
y
                       (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
                 W)
               (And
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V x) W)
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V y) W))))
          (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
           (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
 V),
           @Eq
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (Set
α)
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V))
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin α V
               (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
               (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                 (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
```

```
                  (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                    (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))) y
                    (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingletonMeet α V
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
 α V x)
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton
 α V y)))
           (@And.intro
             (And
               (And
                 (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                  (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V),
                  @Eq
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 (Set α)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V))
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.
toElementMap₂ α α (Set α) V V
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) x y)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoin α V
                      (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                        (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
x
                        (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                          (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))
) y
                          (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V))))))
                 (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V) (cons : Nat → Nat)
                  (hconsp : Nat.Primrec cons)
                  (hcons :
                    ∀ (a b : Nat),
                      Iff (@Eq Nat (cons (Nat.pair a b)) (@OfNat.ofNat Nat (
nat_lit 1) (instOfNatNat (nat_lit 1))))
                        (∃ (k : Nat),
                          @LE.le (Set α) (@Set.instLE α)
                            (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
                            (@Inter.inter (Set α) (@Set.instInter α)
```

```
                              (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P a)
                              (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P b)))),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α α) (Set
α)
                    (@DomainTheory.NeighbourhoodSystems.prod α α V V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.prodPresentation α α V V P
 P)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P cons hconsp hcons)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
finJoinMap_prod α V)))
               (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α) {X Y : Set α},
                 @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
                   @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y
→
                     ∀ {W : Set (Set α)},
                       Iff
                         (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel α
α (Set α) V V
                           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) X Y W)
                         (And
                           (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) X W)
                           (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) Y W))))
             (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
               (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 α V) {W : Set (Set α)},
               Iff
                 (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
 (Set α)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin
 α V
                     (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                     (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                       (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))) x
```

```
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                        (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))
y
                        (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)))))
                  W)
                (And
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V x) W)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.
mem (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDsingleton α V y) W)))
              (@And.intro
                (And
                  (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                  (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V),
                  @Eq
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 (Set α)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V))
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.
toElementMap₂ α α (Set α) V V
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) x y)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoin α V
                      (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                        (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
x
                        (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                          (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))
) y
                          (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V))))))
                (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V) (cons : Nat → Nat)
                  (hconsp : Nat.Primrec cons)
                  (hcons :
```

```
                    ∀ (a b : Nat),
                      Iff (@Eq Nat (cons (Nat.pair a b)) (@OfNat.ofNat Nat (
nat_lit 1) (instOfNatNat (nat_lit 1))))
                        (∃ (k : Nat),
                          @LE.le (Set α) (@Set.instLE α)
                            (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)

                            (@Inter.inter (Set α) (@Set.instInter α)
                              (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P a)
                              (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P b)))),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α α) (Set
α)
                    (@DomainTheory.NeighbourhoodSystems.prod α α V V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.prodPresentation α α V V P
 P)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P cons hconsp hcons)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
finJoinMap_prod α V)))
              (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α) {X Y : Set α},
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X →
                  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y
→
                    ∀ {W : Set (Set α)},
                      Iff
                        (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel α
α (Set α) V V
                          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) X Y W)
                        (And
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) X W)
                          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
α (Set α) V
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PowerDomain α V)
                            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
.PDsingletonApproxMap α V) Y W)))
              (@And.intro
                (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                 (x y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
Element α V),
                 @Eq
```

```
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
 (Set α)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V))
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.
toElementMap₂ α α (Set α) V V
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂ α V) x y)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoin α V
                      (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2)))
                      (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                        (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
x
                        (@Matrix.vecCons (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V)
                          (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))
) y
                          (@Matrix.vecEmpty (@DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem.Element α V))))))
                (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α)
                  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α
 V) (cons : Nat → Nat)
                  (hconsp : Nat.Primrec cons)
                  (hcons :
                    ∀ (a b : Nat),
                      Iff (@Eq Nat (cons (Nat.pair a b)) (@OfNat.ofNat Nat (
nat_lit 1) (instOfNatNat (nat_lit 1))))
                        (∃ (k : Nat),
                          @LE.le (Set α) (@Set.instLE α)
                            (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
                            (@Inter.inter (Set α) (@Set.instInter α)
                              (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P a)
                              (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P b)))),
                  @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum α α) (Set
α)
                    (@DomainTheory.NeighbourhoodSystems.prod α α V V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.prodPresentation α α V V P
 P)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P cons hconsp hcons)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
finJoinMap_prod α V))
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂_toElementMap
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDfinJoinApproxMap₂_isComputable)
```

```
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    PDfinJoinApproxMap₂_rel_iff)
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    PDfinJoin_inter_two)
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDfinJoin_pair)
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    PDsingletonApproxMap_rel_Ypd_iff)
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    PDsingletonApproxMap_toElementMap)
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton_mono)
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDsingleton_principal)
   @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.singleton_isComputable)
  DomainTheory.NeighbourhoodSystems.Counterexample712C.
    vshape_not_trianglelefteq_powerDomain
end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

def interList (base : Set β) : List (Set β) → Set β
  | [] => base
  | Y :: M => Y ∩ interList base M

@[simp] theorem interList_nil (base : Set β) : interList base [] = base := rfl

end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

def funPair (e : ℕ) : Set α × Set β := (P₀.X e.unpair.1, P₁.X e.unpair.2)

@[simp] theorem funPair_fst (e : ℕ) : (funPair P₀ P₁ e).1 = P₀.X e.unpair.1 := rfl

@[simp] theorem funPair_snd (e : ℕ) : (funPair P₀ P₁ e).2 = P₁.X e.unpair.2 := rfl

def bitSelect : List ℕ → ℕ → List ℕ
  | [], _ => []
  | e :: L, b => if b % 2 = 1 then e :: bitSelect L (b / 2) else bitSelect L (b / 2)

@[simp] theorem bitSelect_nil (b : ℕ) : bitSelect [] b = [] := rfl

theorem andFoldl_eq_one_iff (g : ℕ → ℕ) :
    ∀ (el : List ℕ) (a : ℕ), a ≤ 1 →
      (List.foldl (fun acc x => selectFn acc (isOne (g x)) 0) a el = 1 ↔
        a = 1 ∧ ∀ e ∈ el, g e = 1)
  | [], a, _ => by simp
  | e :: el, a, ha => by
    rw [List.foldl_cons]
    have hstep : selectFn a (isOne (g e)) 0 ≤ 1 := by
      rcases (show a = 0 ∨ a = 1 by omega) with h | h <;> subst h
      · rw [selectFn_zero]; exact Nat.zero_le 1
      · rw [selectFn_one]; exact isOne_le_one _
```

```
    rw [andFoldl_eq_one_iff g el _ hstep]
    rcases (show a = 0 ∨ a = 1 by omega) with h | h <;> subst h
    · rw [selectFn_zero]; simp
    · rw [selectFn_one, List.forall_mem_cons, isOne_eq_one_iff]
      constructor
      · rintro ⟨hge, hall⟩; exact ⟨rfl, hge, hall⟩
      · rintro ⟨_, hge, hall⟩; exact ⟨hge, hall⟩

theorem andFoldl_one (g : ℕ → ℕ) (el : List ℕ) :
    List.foldl (fun acc x => selectFn acc (isOne (g x)) 0) 1 el = 1 ↔ ∀ e ∈ el, g e =
    1 := by
  rw [andFoldl_eq_one_iff g el 1 (le_refl 1)]; simp

def appendStep (acc x : ℕ) : ℕ := Nat.pair x acc + 1

def appendStp (w : ℕ) : ℕ := appendStep w.unpair.2.unpair.1 w.unpair.1

def appendCode (a b : ℕ) : ℕ := foldCode appendStp 0 a b

theorem appendStp_eq (x acc : ℕ) : appendStp (Nat.pair x (Nat.pair acc 0)) =
    appendStep acc x := by
  unfold appendStp; simp only [unpair_pair_fst, unpair_pair_snd]

def botMap : ApproximableMap V₀ V₁ :=
  leastMap [] (by simp) (by intro X _; rw [interYs_nil]; exact V₁.master_mem)

theorem botMap_rel {X : Set α} {Y : Set β} :
    (botMap : ApproximableMap V₀ V₁).rel X Y ↔ V₀.mem X ∧ V₁.mem Y ∧ V₁.master ⊆ Y :=
    Iff.rfl

def condSet (k : ℕ) (A : Set β) (el : List ℕ) : Set β :=
  {z | z ∈ A ∧ ∀ e ∈ el, P₀.X k ⊆ P₀.X e.unpair.1 → z ∈ P₁.X e.unpair.2}

theorem condSet_nil (k : ℕ) (A : Set β) : condSet P₀ P₁ k A [] = A := by
  ext z; simp [condSet]

theorem condSet_subset (k : ℕ) (A : Set β) (el : List ℕ) : condSet P₀ P₁ k A el ⊆ A :=
  fun _ hz => hz.1

def consPairChar (gN : ℕ → ℕ) (n m : ℕ) : ℕ :=
  selectFn (isOne (gN n)) (selectFn (isOne (gN m)) (gN (appendCode n m)) 1) 1

section ConsFold

variable {V : NeighborhoodSystem α} (P : ComputablePresentation V)

def consUpd (projFn fc : ℕ → ℕ) (s x : ℕ) : ℕ :=
  selectFn (s.unpair.1 % 2)
    (Nat.pair (s.unpair.1 / 2)
      (Nat.pair (P.inter s.unpair.2.unpair.1 (projFn x))
        (selectFn s.unpair.2.unpair.2 (isOne (fc (Nat.pair s.unpair.2.unpair.1 (projFn
    x)))) 0)))
    (Nat.pair (s.unpair.1 / 2) (Nat.pair s.unpair.2.unpair.1 s.unpair.2.unpair.2))

def consStp (projFn fc : ℕ → ℕ) (w : ℕ) : ℕ :=
  consUpd P projFn fc w.unpair.2.unpair.1 w.unpair.1
```

```
def consCharAt (projFn fc : ℕ → ℕ) (w : ℕ) : ℕ :=
  (foldCode (consStp P projFn fc) 0 (Nat.pair w.unpair.1 (Nat.pair P.masterIdx 1))
    w.unpair.2).unpair.2.unpair.2

end ConsFold

theorem decodeList_appendStep (acc x : ℕ) :
    decodeList (appendStep acc x) = x :: decodeList acc := by
  unfold appendStep; rw [decodeList_succ, unpair_pair_fst, unpair_pair_snd]

theorem decodeList_encodeList (l : List ℕ) : decodeList (encodeList l) = l := by
  induction l with
  | nil => rw [show encodeList ([] : List ℕ) = 0 from rfl, decodeList_zero]
  | cons a l ih =>
    rw [show encodeList (a :: l) = Nat.pair a (encodeList l) + 1 from rfl,
      decodeList_succ, unpair_pair_fst, unpair_pair_snd, ih]

theorem decodeList_foldl_appendStp (el : List ℕ) (acc : ℕ) :
    decodeList (List.foldl (fun acc x => appendStp (Nat.pair x (Nat.pair acc 0))) acc
    el)
      = el.reverse ++ decodeList acc := by
  induction el generalizing acc with
  | nil => simp
  | cons e el ih =>
    rw [List.foldl_cons, ih, appendStp_eq, decodeList_appendStep, List.reverse_cons,
      List.append_assoc, List.singleton_append]

theorem decodeList_appendCode (a b : ℕ) :
    decodeList (appendCode a b) = (decodeList b).reverse ++ decodeList a := by
  unfold appendCode; rw [foldCode_eq']; exact decodeList_foldl_appendStp (decodeList b
    ) a

def funImpChar (fc0 fc1 : ℕ → ℕ) (w : ℕ) : ℕ :=
  selectFn (isOne (consCharAt P₀ (fun e => e.unpair.1) fc0 w))
    (isOne (consCharAt P₁ (fun e => e.unpair.2) fc1 w)) 1

def funConsChar (fc0 fc1 : ℕ → ℕ) (c : ℕ) : ℕ :=
  bForallFn (funImpChar P₀ P₁ fc0 fc1) c (2 ^ c)

def funListOf (el : List ℕ) : List (Set α × Set β) := el.map (funPair P₀ P₁)

def Xenum (gN : ℕ → ℕ) (c : ℕ) : Set (ApproximableMap V₀ V₁) :=
  if gN c = 1 then stepFun (funListOf P₀ P₁ (decodeList c)) else Set.univ

theorem Xenum_neg {gN : ℕ → ℕ} {c : ℕ} (h : gN c = 1) : Xenum P₀ P₁ gN c = Set.univ :=
    ite_eq_right h

theorem Xenum_pos {gN : ℕ → ℕ} {c : ℕ} (h : gN c = 1) :
    Xenum P₀ P₁ gN c = stepFun (funListOf P₀ P₁ (decodeList c)) := ite_eq_left h

theorem funListOf_cons (e : ℕ) (el : List ℕ) :
    funListOf P₀ P₁ (e :: el) = funPair P₀ P₁ e :: funListOf P₀ P₁ el := rfl

theorem exists_funListOf {L : List (Set α × Set β)} (hL : ∀ p ∈ L, V₀.mem p.1 ∧ V₁.mem
    p.2) :
```

```
    ∃ el, funListOf P₀ P₁ el = L := by
  induction L with
  | nil => exact ⟨[], rfl⟩
  | cons p L ih =>
    obtain ⟨X, Y⟩ := p
    obtain ⟨i, hi⟩ := P₀.surj (hL (X, Y) (List.mem_cons.mpr (Or.inl rfl))).1
    obtain ⟨j, hj⟩ := P₁.surj (hL (X, Y) (List.mem_cons.mpr (Or.inl rfl))).2
    obtain ⟨el, hel⟩ := ih (fun q hq => hL q (List.mem_cons.mpr (Or.inr hq)))
    refine ⟨Nat.pair i j :: el, ?_⟩
    rw [funListOf_cons, hel]
    congr 1
    show (P₀.X (Nat.pair i j).unpair.1, P₁.X (Nat.pair i j).unpair.2) = (X, Y)
    rw [unpair_pair_fst, unpair_pair_snd, hi, hj]

theorem funListOf_valid (el : List ℕ) :
    ∀ p ∈ funListOf P₀ P₁ el, V₀.mem p.1 ∧ V₁.mem p.2 := by
  intro p hp
  rw [funListOf, List.mem_map] at hp
  obtain ⟨e, _, rfl⟩ := hp
  exact ⟨P₀.mem_X _, P₁.mem_X _⟩

theorem Xenum_mem (gN : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P₀ P₁ (decodeList c))
      : Set (ApproximableMap V₀ V₁)).Nonempty) (c : ℕ) :
    (funSpace V₀ V₁).mem (Xenum P₀ P₁ gN c) := by
  by_cases h : gN c = 1
  · rw [Xenum_pos P₀ P₁ h]
    exact ⟨⟨funListOf P₀ P₁ (decodeList c), funListOf_valid P₀ P₁ _, rfl⟩, (hgN c).mp h⟩
  · rw [Xenum_neg P₀ P₁ h]; exact funSpace_master ▸ (funSpace V₀ V₁).master_mem

theorem Xenum_nonempty (gN : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P₀ P₁ (decodeList c))
      : Set (ApproximableMap V₀ V₁)).Nonempty) (c : ℕ) :
    (Xenum P₀ P₁ gN c).Nonempty := (Xenum_mem P₀ P₁ gN hgN c).2

section ConsChain

variable {V : NeighborhoodSystem α} (P : ComputablePresentation V)

def idxchain (js : List ℕ) : ℕ := js.foldl (fun acc j => P.inter acc j) P.masterIdx

def interFrom (A : Set α) : List ℕ → Set α
  | [] => A
  | j :: js => interFrom (A ∩ P.X j) js

end ConsChain

def interIdx (gN : ℕ → ℕ) (n m : ℕ) : ℕ :=
  selectFn (isOne (gN n)) (selectFn (isOne (gN m)) (appendCode n m) n) m

def interYsStp (incl0 : ℕ → ℕ) (w : ℕ) : ℕ :=
  selectFn (isOne (incl0 (Nat.pair w.unpair.2.unpair.2 w.unpair.1.unpair.1)))
    (P₁.inter w.unpair.2.unpair.1 w.unpair.1.unpair.2) w.unpair.2.unpair.1

def interYsIdx (incl0 : ℕ → ℕ) (a k : ℕ) : ℕ :=
  foldCode (interYsStp P₁ incl0) k P₁.masterIdx a
```

```
theorem mem_condSet {k : ℕ} {A : Set β} {el : List ℕ} {z : β} :
    z ∈ condSet P₀ P₁ k A el ↔ z ∈ A ∧ ∀ e ∈ el, P₀.X k ⊆ P₀.X e.unpair.1 → z ∈ P₁.X
    e.unpair.2 :=
  Iff.rfl

theorem condSet_cons_neg {k : ℕ} {A : Set β} {e : ℕ} {el : List ℕ}
    (h : ¬ P₀.X k ⊆ P₀.X e.unpair.1) :
    condSet P₀ P₁ k A (e :: el) = condSet P₀ P₁ k A el := by
  ext z
  simp only [mem_condSet, List.mem_cons]
  constructor
  · rintro ⟨hzA, hall⟩
    exact ⟨hzA, fun e' he' hsub => hall e' (Or.inr he') hsub⟩
  · rintro ⟨hzA, hall⟩
    exact ⟨hzA, fun e' he' hsub => he'.elim (fun heq => absurd (heq ▶ hsub) h) (fun
    hmem => hall e' hmem hsub)⟩

theorem condSet_cons_pos {k : ℕ} {A : Set β} {e : ℕ} {el : List ℕ}
    (h : P₀.X k ⊆ P₀.X e.unpair.1) :
    condSet P₀ P₁ k A (e :: el) = condSet P₀ P₁ k (A ∩ P₁.X e.unpair.2) el := by
  ext z
  simp only [mem_condSet, List.mem_cons, Set.mem_inter_iff]
  constructor
  · rintro ⟨hzA, hall⟩
    exact ⟨⟨hzA, hall e (Or.inl rfl) h⟩, fun e' he' hsub => hall e' (Or.inr he') hsub⟩
  · rintro ⟨⟨hzA, hzE⟩, hall⟩
    exact ⟨hzA, fun e' he' hsub => he'.elim (fun heq => heq ▶ hzE) (fun hmem => hall e'
     hmem hsub)⟩

theorem condFoldl_spec (incl0 : ℕ → ℕ)
    (hincl0 : ∀ s, incl0 s = 1 ↔ P₀.X s.unpair.1 ⊆ P₀.X s.unpair.2) (k : ℕ) :
    ∀ (el : List ℕ) (A : Set β) (a : ℕ), P₁.X a = A → V₁.mem A →
      V₁.mem (condSet P₀ P₁ k A el) →
      P₁.X (List.foldl (fun acc x => if incl0 (Nat.pair k x.unpair.1) = 1
              then P₁.inter acc x.unpair.2 else acc) a el) = condSet P₀ P₁ k A el
  | [], A, a, hXa, _, _ => by rw [List.foldl_nil, condSet_nil]; exact hXa
  | e :: el, A, a, hXa, hA, hcons => by
    rw [List.foldl_cons]
    by_cases hpred : incl0 (Nat.pair k e.unpair.1) = 1
    · rw [ite_eq_left hpred]
      have hincl : P₀.X k ⊆ P₀.X e.unpair.1 := by
        have h := (hincl0 (Nat.pair k e.unpair.1)).mp hpred
        rwa [unpair_pair_fst, unpair_pair_snd] at h
      rw [condSet_cons_pos P₀ P₁ hincl] at hcons ⊢
      have hwit : V₁.mem (A ∩ P₁.X e.unpair.2) :=
        V₁.inter_mem hA (P₁.mem_X _) hcons (condSet_subset P₀ P₁ k (A ∩ P₁.X e.unpair.2)
     el)
      have hk : ∃ j, P₁.X j ⊆ P₁.X a ∩ P₁.X e.unpair.2 := by
        obtain ⟨j, hj⟩ := P₁.surj hwit; exact ⟨j, by rw [hj, hXa]⟩
      have hXinter : P₁.X (P₁.inter a e.unpair.2) = A ∩ P₁.X e.unpair.2 := by
        rw [P₁.inter_spec hk, hXa]
      exact condFoldl_spec incl0 hincl0 k el (A ∩ P₁.X e.unpair.2) (P₁.inter a e.unpair
    .2)
        hXinter hwit hcons
    · rw [ite_eq_right hpred]
```

```
      have hincl : ¬ P₀.X k ⊆ P₀.X e.unpair.1 := fun hc =>
        hpred ((hincl0 (Nat.pair k e.unpair.1)).mpr (by rwa [unpair_pair_fst,
    unpair_pair_snd]))
      rw [condSet_cons_neg P₀ P₁ hincl] at hcons ⊢
      exact condFoldl_spec incl0 hincl0 k el A a hXa hA hcons

theorem condSet_eq_interYs (k : ℕ) (el : List ℕ) :
    condSet P₀ P₁ k V₁.master el = interYs V₁.master (funListOf P₀ P₁ el) (P₀.X k) := by
  ext z
  rw [mem_interYs, mem_condSet]
  constructor
  · rintro ⟨hz, hall⟩
    refine ⟨hz, ?_⟩
    intro p hp hsub
    rw [funListOf, List.mem_map] at hp
    obtain ⟨e, he, rfl⟩ := hp
    exact hall e he hsub
  · rintro ⟨hz, hall⟩
    exact ⟨hz, fun e he hsub => hall (funPair P₀ P₁ e) (List.mem_map.mpr ⟨e, he, rfl⟩)
    hsub⟩

theorem primrec_appendCode : Nat.Primrec (fun t => appendCode t.unpair.1 t.unpair.2)
    := by
  have hstp : Nat.Primrec appendStp :=
    (primrec_add₂ (Nat.Primrec.left.pair (Nat.Primrec.left.comp Nat.Primrec.right))
      (Nat.Primrec.const 1)).of_eq (fun w => rfl)
  exact (primrec_foldCode hstp (Nat.Primrec.const 0) Nat.Primrec.left Nat.Primrec.
    right).of_eq
    (fun t => rfl)

theorem primrec_consPairChar (gN : ℕ → ℕ) (hgNp : Nat.Primrec gN) :
    Nat.Primrec (fun t => consPairChar gN t.unpair.1 t.unpair.2) := by
  have hn := hgNp.comp Nat.Primrec.left
  have hm := hgNp.comp Nat.Primrec.right
  have happ := hgNp.comp primrec_appendCode
  have hinner := primrec_selectFn (primrec_isOne.comp hm) happ (Nat.Primrec.const 1)
  exact (primrec_selectFn (primrec_isOne.comp hn) hinner (Nat.Primrec.const 1)).of_eq
    (fun _ => rfl)

theorem primrec_interIdx (gN : ℕ → ℕ) (hgNp : Nat.Primrec gN) :
    Nat.Primrec (fun t => interIdx gN t.unpair.1 t.unpair.2) := by
  have hn := hgNp.comp Nat.Primrec.left
  have hm := hgNp.comp Nat.Primrec.right
  have hinner := primrec_selectFn (primrec_isOne.comp hm) primrec_appendCode Nat.
    Primrec.left
  exact (primrec_selectFn (primrec_isOne.comp hn) hinner Nat.Primrec.right).of_eq (fun
    _ => rfl)

theorem primrec_interYsStp (incl0 : ℕ → ℕ) (hincl0p : Nat.Primrec incl0) :
    Nat.Primrec (interYsStp P₁ incl0) := by
  have he1 : Nat.Primrec (fun w : ℕ => w.unpair.1.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.left
  have he2 : Nat.Primrec (fun w : ℕ => w.unpair.1.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.left
  have hacc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
```

```
  have hk : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hcond := primrec_isOne.comp (hincl0p.comp (hk.pair he1))
  have hinter := P₁.inter_primrec.comp (hacc.pair he2)
  refine (primrec_selectFn hcond hinter hacc).of_eq (fun w => ?_)
  unfold interYsStp
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem primrec_interYsIdx (incl0 : ℕ → ℕ) (hincl0p : Nat.Primrec incl0) :
    Nat.Primrec (fun t => interYsIdx P₁ incl0 t.unpair.1 t.unpair.2) :=
  (primrec_foldCode (primrec_interYsStp P₁ incl0 hincl0p) Nat.Primrec.right
    (Nat.Primrec.const P₁.masterIdx) Nat.Primrec.left).of_eq (fun _ => rfl)

theorem rel_interYs_funList {f : ApproximableMap V₀ V₁} {el : List ℕ}
    (hf : f ∈ stepFun (funListOf P₀ P₁ el)) (n' : ℕ) :
    f.rel (P₀.X n') (interYs V₁.master (funListOf P₀ P₁ el) (P₀.X n')) := by
  induction el with
  | nil =>
    rw [funListOf, List.map_nil, interYs_nil]
    exact f.mono f.master_rel (V₀.sub_master (P₀.mem_X n')) subset_rfl (P₀.mem_X n') V₁
    .master_mem
  | cons e el ih =>
    rw [funListOf_cons] at hf
    have hftail : f ∈ stepFun (funListOf P₀ P₁ el) :=
      fun p hp => hf p (List.mem_cons_of_mem _ hp)
    have htail := ih hftail
    rw [funListOf_cons]
    rcases P₀.incl_computable.em (Nat.pair n' e.unpair.1) with hinc | hinc <;>
      simp only [unpair_pair_fst, unpair_pair_snd] at hinc
    · have hp : f.rel (P₀.X e.unpair.1) (P₁.X e.unpair.2) :=

        hf (funPair P₀ P₁ e) (List.mem_cons.mpr (Or.inl rfl))
      have hXp2 : f.rel (P₀.X n') (P₁.X e.unpair.2) :=
        f.mono hp hinc subset_rfl (P₀.mem_X n') (f.rel_cod hp)
      have heq : interYs V₁.master (funPair P₀ P₁ e :: funListOf P₀ P₁ el) (P₀.X n')
          = P₁.X e.unpair.2 ∩ interYs V₁.master (funListOf P₀ P₁ el) (P₀.X n') := by
        rw [interYs_cons]; ext z
        simp only [Set.mem_inter_iff, Set.mem_ofPred_eq, funPair]
        exact ⟨fun ⟨h1, h2⟩ => ⟨h1 hinc, h2⟩, fun ⟨h1, h2⟩ => ⟨fun _ => h1, h2⟩⟩
      rw [heq]; exact f.inter_right hXp2 htail
    · have heq : interYs V₁.master (funPair P₀ P₁ e :: funListOf P₀ P₁ el) (P₀.X n')
          = interYs V₁.master (funListOf P₀ P₁ el) (P₀.X n') := by
        rw [interYs_cons]; ext z
        simp only [Set.mem_inter_iff, Set.mem_ofPred_eq, funPair]
        exact ⟨fun h => h.2, fun h => ⟨fun hc => absurd hc hinc, h⟩⟩
      rw [heq]; exact htail

theorem interYs_funList_mem_of_nonempty {ea : List ℕ}
    (h : (stepFun (funListOf P₀ P₁ ea) : Set (ApproximableMap V₀ V₁)).Nonempty)
    {X : Set α} (hX : V₀.mem X) :
    V₁.mem (interYs V₁.master (funListOf P₀ P₁ ea) X) := by
  obtain ⟨n', hn'⟩ := P₀.surj hX
  obtain ⟨f, hf⟩ := h
  have hr := rel_interYs_funList P₀ P₁ hf n'
  rw [hn'] at hr
  exact f.rel_cod hr
```

```
theorem selectFn_isOne (v a b : ℕ) : selectFn (isOne v) a b = if v = 1 then a else b
    := by
  by_cases h : v = 1
  · rw [ite_eq_left h, h, (isOne_eq_one_iff 1).mpr rfl, selectFn_one]
  · rw [ite_eq_right h]
    have h0 : isOne v = 0 := by
      rcases (show isOne v = 0 ∨ isOne v = 1 from by have := isOne_le_one v; omega)
    with h0 | h1
      · exact h0
      · exact absurd ((isOne_eq_one_iff v).mp h1) h
    rw [h0, selectFn_zero]

theorem interYsIdx_spec (incl0 : ℕ → ℕ)
    (hincl0 : ∀ s, incl0 s = 1 ↔ P₀.X s.unpair.1 ⊆ P₀.X s.unpair.2) (a k : ℕ)
    (hcons : V₁.mem (interYs V₁.master (funListOf P₀ P₁ (decodeList a)) (P₀.X k))) :
    P₁.X (interYsIdx P₁ incl0 a k)
      = interYs V₁.master (funListOf P₀ P₁ (decodeList a)) (P₀.X k) := by
  unfold interYsIdx
  rw [foldCode_eq']
  have hstep : (fun acc x => interYsStp P₁ incl0 (Nat.pair x (Nat.pair acc k)))
      = (fun acc x => if incl0 (Nat.pair k x.unpair.1) = 1
            then P₁.inter acc x.unpair.2 else acc) := by
    funext acc x
    show interYsStp P₁ incl0 (Nat.pair x (Nat.pair acc k)) = _
    unfold interYsStp
    simp only [unpair_pair_fst, unpair_pair_snd]
    exact selectFn_isOne _ _ _
  rw [hstep]
  rw [← condSet_eq_interYs P₀ P₁ k (decodeList a)] at hcons ⊢
  exact condFoldl_spec P₀ P₁ incl0 hincl0 k (decodeList a) V₁.master P₁.masterIdx
    P₁.masterIdx_spec V₁.master_mem hcons

theorem selectFn_mul_iff (c d : ℕ) : selectFn c d 0 = 1 ↔ c = 1 ∧ d = 1 := by
  have h : selectFn c d 0 = c * d := by simp only [selectFn, Nat.mul_zero, Nat.
    add_zero]
  rw [h, nat_mul_eq_one]

theorem stepFun_funListOf_appendCode (a b : ℕ) :
    (stepFun (funListOf P₀ P₁ (decodeList (appendCode a b))) : Set (ApproximableMap V₀
    V₁)) =
      stepFun (funListOf P₀ P₁ (decodeList a)) ∩ stepFun (funListOf P₀ P₁ (decodeList b
    )) := by
  ext f
  rw [decodeList_appendCode]
  simp only [funListOf, List.map_append, List.map_reverse, mem_stepFun, Set.
    mem_inter_iff,
    List.mem_append, List.mem_reverse]
  constructor
  · intro h; exact ⟨fun p hp => h p (Or.inr hp), fun p hp => h p (Or.inl hp)⟩
  · rintro ⟨ha, hb⟩ p (hp | hp)
    · exact hb p hp
    · exact ha p hp

theorem Xenum_inter_eq (gN : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P₀ P₁ (decodeList c))
```

```
      : Set (ApproximableMap V₀ V₁)).Nonempty) (n m : ℕ)
    (hne : (Xenum P₀ P₁ gN n ∩ Xenum P₀ P₁ gN m).Nonempty) :
    Xenum P₀ P₁ gN (interIdx gN n m) = Xenum P₀ P₁ gN n ∩ Xenum P₀ P₁ gN m := by
  unfold interIdx
  rw [selectFn_isOne]
  by_cases hn : gN n = 1
  · rw [ite_eq_left hn, selectFn_isOne]
    by_cases hm : gN m = 1
    · rw [ite_eq_left hm, Xenum_pos P₀ P₁ hn, Xenum_pos P₀ P₁ hm, ←
    stepFun_funListOf_appendCode P₀ P₁ n m]
      rw [Xenum_pos P₀ P₁ hn, Xenum_pos P₀ P₁ hm] at hne
      have hgne : gN (appendCode n m) = 1 :=
        (hgN _).mpr (by rw [stepFun_funListOf_appendCode P₀ P₁ n m]; exact hne)
      rw [Xenum_pos P₀ P₁ hgne]
    · rw [ite_eq_right hm, Xenum_neg P₀ P₁ hm, Set.inter_univ]
  · rw [ite_eq_right hn, Xenum_neg P₀ P₁ hn, Set.univ_inter]

theorem consPairChar_spec (gN : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P₀ P₁ (decodeList c))
      : Set (ApproximableMap V₀ V₁)).Nonempty) (n m : ℕ) :
    consPairChar gN n m = 1 ↔
      ∃ k, Xenum P₀ P₁ gN k ⊆ Xenum P₀ P₁ gN n ∩ Xenum P₀ P₁ gN m := by
  have hcons_iff : (∃ k, Xenum P₀ P₁ gN k ⊆ Xenum P₀ P₁ gN n ∩ Xenum P₀ P₁ gN m) ↔
      (Xenum P₀ P₁ gN n ∩ Xenum P₀ P₁ gN m).Nonempty := by
    constructor
    · rintro ⟨k, hk⟩; exact (Xenum_nonempty P₀ P₁ gN hgN k).mono hk
    · intro hne
      exact ⟨interIdx gN n m, (Xenum_inter_eq P₀ P₁ gN hgN n m hne).subset⟩
  rw [hcons_iff]
  unfold consPairChar
  by_cases hn : gN n = 1
  · rw [selectFn_isOne, ite_eq_left hn, selectFn_isOne]
    by_cases hm : gN m = 1
    · rw [ite_eq_left hm, hgN (appendCode n m), Xenum_pos P₀ P₁ hn, Xenum_pos P₀ P₁ hm,
        ← stepFun_funListOf_appendCode P₀ P₁ n m]
    · rw [ite_eq_right hm, Xenum_pos P₀ P₁ hn, Xenum_neg P₀ P₁ hm, Set.inter_univ]
      exact iff_of_true rfl ((hgN n).mp hn)
  · rw [selectFn_isOne, ite_eq_right hn, Xenum_neg P₀ P₁ hn, Set.univ_inter]
    exact iff_of_true rfl (Xenum_nonempty P₀ P₁ gN hgN m)

theorem stepFun_funListOf_eq_univ_iff (el : List ℕ) :
    (stepFun (funListOf P₀ P₁ el) : Set (ApproximableMap V₀ V₁)) = Set.univ ↔
      ∀ e ∈ el, P₁.X e.unpair.2 = V₁.master := by
  constructor
  · intro h e he
    have hbot : (botMap : ApproximableMap V₀ V₁) ∈ stepFun (funListOf P₀ P₁ el) := by
      rw [h]; exact Set.mem_univ _
    have hr := hbot (funPair P₀ P₁ e) (List.mem_map.mpr ⟨e, he, rfl⟩)
    exact Set.Subset.antisymm (V₁.sub_master (P₁.mem_X _)) (botMap_rel.mp hr).2.2
  · intro h
    ext f
    simp only [Set.mem_univ, iff_true, mem_stepFun]
    intro p hp
    rw [funListOf, List.mem_map] at hp
    obtain ⟨e, he, rfl⟩ := hp
    show f.rel (P₀.X e.unpair.1) (P₁.X e.unpair.2)
```

```
    rw [h e he]
    exact f.mono f.master_rel (V₀.sub_master (P₀.mem_X _)) subset_rfl (P₀.mem_X _) V₁.
    master_mem

theorem stepFun_funListOf_subset_iff {ea eb : List ℕ}
    (hcons : ∀ {X : Set α}, V₀.mem X → V₁.mem (interYs V₁.master (funListOf P₀ P₁ ea) X
    )) :
    (stepFun (funListOf P₀ P₁ ea) : Set (ApproximableMap V₀ V₁)) ⊆ stepFun (funListOf P
    ₀ P₁ eb) ↔
      ∀ e' ∈ eb, interYs V₁.master (funListOf P₀ P₁ ea) (P₀.X e'.unpair.1) ⊆ P₁.X e'.
    unpair.2 := by
  have hL : ∀ p ∈ funListOf P₀ P₁ ea, V₀.mem p.1 ∧ V₁.mem p.2 := funListOf_valid P₀ P₁
    ea
  constructor
  · intro hsub e' he'
    have hmem := hsub (leastMap_mem_stepFun hL hcons)
    have hrel := hmem (funPair P₀ P₁ e') (List.mem_map.mpr ⟨e', he', rfl⟩)
    exact (leastMap_rel.mp hrel).2.2
  · intro hcond f hf p hp
    rw [funListOf, List.mem_map] at hp
    obtain ⟨e', he', rfl⟩ := hp
    show f.rel (P₀.X e'.unpair.1) (P₁.X e'.unpair.2)
    exact f.mono (rel_interYs_funList P₀ P₁ hf e'.unpair.1) subset_rfl (hcond e' he')
      (P₀.mem_X _) (P₁.mem_X _)

def subStp (incl0 incl1 : ℕ → ℕ) (w : ℕ) : ℕ :=
  selectFn w.unpair.2.unpair.1
    (isOne (incl1 (Nat.pair (interYsIdx P₁ incl0 w.unpair.2.unpair.2 w.unpair.1.unpair
    .1)
      w.unpair.1.unpair.2))) 0

theorem primrec_subStp (incl0 incl1 : ℕ → ℕ) (hincl0p : Nat.Primrec incl0)
    (hincl1p : Nat.Primrec incl1) : Nat.Primrec (subStp P₁ incl0 incl1) := by
  have hflag : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have ha : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hk : Nat.Primrec (fun w : ℕ => w.unpair.1.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.left
  have he2 : Nat.Primrec (fun w : ℕ => w.unpair.1.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.left
  have hidx : Nat.Primrec
      (fun w : ℕ => interYsIdx P₁ incl0 w.unpair.2.unpair.2 w.unpair.1.unpair.1) :=
    ((primrec_interYsIdx P₁ incl0 hincl0p).comp (ha.pair hk)).of_eq (fun w => by
      show interYsIdx P₁ incl0 (Nat.pair w.unpair.2.unpair.2 w.unpair.1.unpair.1).
    unpair.1
        (Nat.pair w.unpair.2.unpair.2 w.unpair.1.unpair.1).unpair.2 = _
      rw [unpair_pair_fst, unpair_pair_snd])
  have hincl := hincl1p.comp (hidx.pair he2)
  refine (primrec_selectFn hflag (primrec_isOne.comp hincl) (Nat.Primrec.const 0)).
    of_eq (fun w => ?_)
  unfold subStp
  rfl

def subChar (incl0 incl1 : ℕ → ℕ) (a b : ℕ) : ℕ := foldCode (subStp P₁ incl0 incl1) a
     1 b
```

```
theorem primrec_subChar (incl0 incl1 : ℕ → ℕ) (hincl0p : Nat.Primrec incl0)
    (hincl1p : Nat.Primrec incl1) :
    Nat.Primrec (fun t => subChar P₁ incl0 incl1 t.unpair.1 t.unpair.2) :=
  (primrec_foldCode (primrec_subStp P₁ incl0 incl1 hincl0p hincl1p) Nat.Primrec.left
    (Nat.Primrec.const 1) Nat.Primrec.right).of_eq (fun _ => rfl)

theorem subChar_spec (incl0 incl1 : ℕ → ℕ)
    (hincl0 : ∀ s, incl0 s = 1 ↔ P₀.X s.unpair.1 ⊆ P₀.X s.unpair.2)
    (hincl1 : ∀ s, incl1 s = 1 ↔ P₁.X s.unpair.1 ⊆ P₁.X s.unpair.2)
    {a : ℕ}
    (hane : (stepFun (funListOf P₀ P₁ (decodeList a)) : Set (ApproximableMap V₀ V₁)).
    Nonempty)
    (b : ℕ) :
    subChar P₁ incl0 incl1 a b = 1 ↔
      (stepFun (funListOf P₀ P₁ (decodeList a)) : Set (ApproximableMap V₀ V₁)) ⊆
        stepFun (funListOf P₀ P₁ (decodeList b)) := by
  have hcons : ∀ {X : Set α},
      V₀.mem X → V₁.mem (interYs V₁.master (funListOf P₀ P₁ (decodeList a)) X) :=
    fun {X} hX => interYs_funList_mem_of_nonempty P₀ P₁ hane hX
  rw [stepFun_funListOf_subset_iff P₀ P₁ hcons]
  unfold subChar
  rw [foldCode_eq']
  have hstep : (fun acc x => subStp P₁ incl0 incl1 (Nat.pair x (Nat.pair acc a)))
      = (fun acc x => selectFn acc
          (isOne (incl1 (Nat.pair (interYsIdx P₁ incl0 a x.unpair.1) x.unpair.2))) 0)
    := by
    funext acc x
    show subStp P₁ incl0 incl1 (Nat.pair x (Nat.pair acc a)) = _
    unfold subStp
    simp only [unpair_pair_fst, unpair_pair_snd]
  rw [hstep, andFoldl_one (fun x => incl1 (Nat.pair (interYsIdx P₁ incl0 a x.unpair.1)
    x.unpair.2))]
  refine forall_congr' (fun e' => ?_)
  refine imp_congr_right (fun he' => ?_)
  rw [hincl1]
  simp only [unpair_pair_fst, unpair_pair_snd]
  rw [interYsIdx_spec P₀ P₁ incl0 hincl0 a e'.unpair.1 (hcons (P₀.mem_X e'.unpair.1))]

def trivStp (eq1 : ℕ → ℕ) (w : ℕ) : ℕ :=
  selectFn w.unpair.2.unpair.1
    (isOne (eq1 (Nat.pair w.unpair.1.unpair.2 P₁.masterIdx))) 0

theorem primrec_trivStp (eq1 : ℕ → ℕ) (heq1p : Nat.Primrec eq1) :
    Nat.Primrec (trivStp P₁ eq1) := by
  have hflag : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have he2 : Nat.Primrec (fun w : ℕ => w.unpair.1.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.left
  have harg := heq1p.comp (he2.pair (Nat.Primrec.const P₁.masterIdx))
  refine (primrec_selectFn hflag (primrec_isOne.comp harg) (Nat.Primrec.const 0)).
    of_eq (fun w => ?_)
  unfold trivStp
  rfl

def trivialChar (eq1 : ℕ → ℕ) (a : ℕ) : ℕ := foldCode (trivStp P₁ eq1) 0 1 a
```

```
def eqEnumChar (gN incl0 incl1 eq1 : ℕ → ℕ) (a b : ℕ) : ℕ :=
  selectFn (isOne (gN a))
    (selectFn (isOne (gN b))
      (selectFn (subChar P₁ incl0 incl1 a b) (subChar P₁ incl0 incl1 b a) 0)
      (trivialChar P₁ eq1 a))
    (selectFn (isOne (gN b)) (trivialChar P₁ eq1 b) 1)

def interEqChar (gN incl0 incl1 eq1 : ℕ → ℕ) (n m k : ℕ) : ℕ :=
  selectFn (consPairChar gN n m) (eqEnumChar P₁ gN incl0 incl1 eq1 (interIdx gN n m) k)
    0

theorem primrec_trivialChar (eq1 : ℕ → ℕ) (heq1p : Nat.Primrec eq1) :
    Nat.Primrec (trivialChar P₁ eq1) :=
  (primrec_foldCode (primrec_trivStp P₁ eq1 heq1p) (Nat.Primrec.const 0)
    (Nat.Primrec.const 1) primrec_id).of_eq (fun _ => rfl)

theorem primrec_eqEnumChar (gN incl0 incl1 eq1 : ℕ → ℕ) (hgNp : Nat.Primrec gN)
    (hincl0p : Nat.Primrec incl0) (hincl1p : Nat.Primrec incl1) (heq1p : Nat.Primrec
    eq1) :
    Nat.Primrec (fun t => eqEnumChar P₁ gN incl0 incl1 eq1 t.unpair.1 t.unpair.2) := by
  have ha := primrec_isOne.comp (hgNp.comp Nat.Primrec.left)
  have hb := primrec_isOne.comp (hgNp.comp Nat.Primrec.right)
  have hsubab : Nat.Primrec (fun t => subChar P₁ incl0 incl1 t.unpair.1 t.unpair.2) :=
    primrec_subChar P₁ incl0 incl1 hincl0p hincl1p
  have hsubba : Nat.Primrec (fun t => subChar P₁ incl0 incl1 t.unpair.2 t.unpair.1) :=
    ((primrec_subChar P₁ incl0 incl1 hincl0p hincl1p).comp
      (Nat.Primrec.right.pair Nat.Primrec.left)).of_eq (fun t => by
        show subChar P₁ incl0 incl1 (Nat.pair t.unpair.2 t.unpair.1).unpair.1
          (Nat.pair t.unpair.2 t.unpair.1).unpair.2 = _
        rw [unpair_pair_fst, unpair_pair_snd])
  have htriva := (primrec_trivialChar P₁ eq1 heq1p).comp Nat.Primrec.left
  have htrivb := (primrec_trivialChar P₁ eq1 heq1p).comp Nat.Primrec.right
  have hbothcons := primrec_selectFn hsubab hsubba (Nat.Primrec.const 0)
  have hacons := primrec_selectFn hb hbothcons htriva
  have hanot := primrec_selectFn hb htrivb (Nat.Primrec.const 1)
  exact (primrec_selectFn ha hacons hanot).of_eq (fun _ => rfl)

theorem primrec_interEqChar (gN incl0 incl1 eq1 : ℕ → ℕ) (hgNp : Nat.Primrec gN)
    (hincl0p : Nat.Primrec incl0) (hincl1p : Nat.Primrec incl1) (heq1p : Nat.Primrec
    eq1) :
    Nat.Primrec (fun t => interEqChar P₁ gN incl0 incl1 eq1 t.unpair.1
      t.unpair.2.unpair.1 t.unpair.2.unpair.2) := by
  have hn : Nat.Primrec (fun t : ℕ => t.unpair.1) := Nat.Primrec.left
  have hm : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hk : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hcons := (primrec_consPairChar gN hgNp).comp (hn.pair hm)
  have hidx := (primrec_interIdx gN hgNp).comp (hn.pair hm)
  have heqc := (primrec_eqEnumChar P₁ gN incl0 incl1 eq1 hgNp hincl0p hincl1p heq1p).
    comp
    (hidx.pair hk)
  refine (primrec_selectFn hcons heqc (Nat.Primrec.const 0)).of_eq (fun t => ?_)
  show _ = interEqChar P₁ gN incl0 incl1 eq1 t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.
    unpair.2
```

```
  unfold interEqChar
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem trivialChar_spec (eq1 : ℕ → ℕ)
    (heq1 : ∀ s, eq1 s = 1 ↔ P₁.X s.unpair.1 = P₁.X s.unpair.2) (a : ℕ) :
    trivialChar P₁ eq1 a = 1 ↔
      (stepFun (funListOf P₀ P₁ (decodeList a)) : Set (ApproximableMap V₀ V₁)) = Set.
    univ := by
  rw [stepFun_funListOf_eq_univ_iff P₀ P₁]
  unfold trivialChar
  rw [foldCode_eq']
  have hstep : (fun acc x => trivStp P₁ eq1 (Nat.pair x (Nat.pair acc 0)))
      = (fun acc x => selectFn acc (isOne (eq1 (Nat.pair x.unpair.2 P₁.masterIdx))) 0)
    := by
    funext acc x
    show trivStp P₁ eq1 (Nat.pair x (Nat.pair acc 0)) = _
    unfold trivStp
    simp only [unpair_pair_fst, unpair_pair_snd]
  rw [hstep, andFoldl_one (fun x => eq1 (Nat.pair x.unpair.2 P₁.masterIdx))]
  refine forall_congr' (fun e => ?_)
  refine imp_congr_right (fun he => ?_)
  rw [heq1]
  simp only [unpair_pair_fst, unpair_pair_snd, P₁.masterIdx_spec]

theorem eqEnumChar_spec (gN incl0 incl1 eq1 : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P₀ P₁ (decodeList c))
      : Set (ApproximableMap V₀ V₁)).Nonempty)
    (hincl0 : ∀ s, incl0 s = 1 ↔ P₀.X s.unpair.1 ⊆ P₀.X s.unpair.2)
    (hincl1 : ∀ s, incl1 s = 1 ↔ P₁.X s.unpair.1 ⊆ P₁.X s.unpair.2)
    (heq1 : ∀ s, eq1 s = 1 ↔ P₁.X s.unpair.1 = P₁.X s.unpair.2) (a b : ℕ) :
    eqEnumChar P₁ gN incl0 incl1 eq1 a b = 1 ↔ Xenum P₀ P₁ gN a = Xenum P₀ P₁ gN b :=
    by
  unfold eqEnumChar
  by_cases ha : gN a = 1
  · rw [selectFn_isOne, ite_eq_left ha, selectFn_isOne]
    have hanea := (hgN a).mp ha
    by_cases hb : gN b = 1
    · rw [ite_eq_left hb, Xenum_pos P₀ P₁ ha, Xenum_pos P₀ P₁ hb, selectFn_mul_iff,
        subChar_spec P₀ P₁ incl0 incl1 hincl0 hincl1 hanea b,
        subChar_spec P₀ P₁ incl0 incl1 hincl0 hincl1 ((hgN b).mp hb) a]
      exact ⟨fun ⟨h1, h2⟩ => Set.Subset.antisymm h1 h2, fun h => ⟨h.subset, h.superset⟩⟩
    · rw [ite_eq_right hb, Xenum_pos P₀ P₁ ha, Xenum_neg P₀ P₁ hb, trivialChar_spec P₀ P
    ₁ eq1 heq1 a]
  · rw [selectFn_isOne, ite_eq_right ha, selectFn_isOne]
    by_cases hb : gN b = 1
    · rw [ite_eq_left hb, Xenum_neg P₀ P₁ ha, Xenum_pos P₀ P₁ hb, trivialChar_spec P₀ P₁
     eq1 heq1 b]
      exact eq_comm
    · rw [ite_eq_right hb, Xenum_neg P₀ P₁ ha, Xenum_neg P₀ P₁ hb]
      exact iff_of_true rfl rfl

theorem interEqChar_spec (gN incl0 incl1 eq1 : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P₀ P₁ (decodeList c))
      : Set (ApproximableMap V₀ V₁)).Nonempty)
    (hincl0 : ∀ s, incl0 s = 1 ↔ P₀.X s.unpair.1 ⊆ P₀.X s.unpair.2)
    (hincl1 : ∀ s, incl1 s = 1 ↔ P₁.X s.unpair.1 ⊆ P₁.X s.unpair.2)
```

```
    (heq1 : ∀ s, eq1 s = 1 ↔ P₁.X s.unpair.1 = P₁.X s.unpair.2) (n m k : ℕ) :
    interEqChar P₁ gN incl0 incl1 eq1 n m k = 1 ↔
      Xenum P₀ P₁ gN n ∩ Xenum P₀ P₁ gN m = Xenum P₀ P₁ gN k := by
  unfold interEqChar
  rw [selectFn_mul_iff, consPairChar_spec P₀ P₁ gN hgN n m,
    eqEnumChar_spec P₀ P₁ gN incl0 incl1 eq1 hgN hincl0 hincl1 heq1 (interIdx gN n m) k
    ]
  constructor
  · rintro ⟨⟨k', hk'⟩, heq⟩
    have hne : (Xenum P₀ P₁ gN n ∩ Xenum P₀ P₁ gN m).Nonempty :=
      (Xenum_nonempty P₀ P₁ gN hgN k').mono hk'
    rw [← Xenum_inter_eq P₀ P₁ gN hgN n m hne]; exact heq
  · intro heq
    have hne : (Xenum P₀ P₁ gN n ∩ Xenum P₀ P₁ gN m).Nonempty := by
      rw [heq]; exact Xenum_nonempty P₀ P₁ gN hgN k
    exact ⟨⟨k, heq.superset⟩, by rw [Xenum_inter_eq P₀ P₁ gN hgN n m hne]; exact heq⟩

def funPresentation (gN incl0 incl1 eq1 : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P₀ P₁ (decodeList c))
      : Set (ApproximableMap V₀ V₁)).Nonempty) (hgNp : Nat.Primrec gN)
    (hincl0 : ∀ s, incl0 s = 1 ↔ P₀.X s.unpair.1 ⊆ P₀.X s.unpair.2) (hincl0p : Nat.
    Primrec incl0)
    (hincl1 : ∀ s, incl1 s = 1 ↔ P₁.X s.unpair.1 ⊆ P₁.X s.unpair.2) (hincl1p : Nat.
    Primrec incl1)
    (heq1 : ∀ s, eq1 s = 1 ↔ P₁.X s.unpair.1 = P₁.X s.unpair.2) (heq1p : Nat.Primrec
    eq1) :
    ComputablePresentation (funSpace V₀ V₁) where
  X := Xenum P₀ P₁ gN
  mem_X := Xenum_mem P₀ P₁ gN hgN
  surj := by
    rintro W ⟨⟨L, hL, rfl⟩, hne⟩
    obtain ⟨el, hel⟩ := exists_funListOf P₀ P₁ hL
    have hc : gN (encodeList el) = 1 := by rw [hgN, decodeList_encodeList, hel]; exact
     hne
    exact ⟨encodeList el, by rw [Xenum_pos P₀ P₁ hc, decodeList_encodeList, hel]⟩
  interEq_computable :=
    ⟨fun t => interEqChar P₁ gN incl0 incl1 eq1 t.unpair.1 t.unpair.2.unpair.1 t.unpair
    .2.unpair.2,
      primrec_interEqChar P₁ gN incl0 incl1 eq1 hgNp hincl0p hincl1p heq1p,
      fun t => (interEqChar_spec P₀ P₁ gN incl0 incl1 eq1 hgN hincl0 hincl1 heq1
        t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair.2).symm⟩
  cons_computable :=
    ⟨fun t => consPairChar gN t.unpair.1 t.unpair.2, primrec_consPairChar gN hgNp,
      fun t => (consPairChar_spec P₀ P₁ gN hgN t.unpair.1 t.unpair.2).symm⟩
  inter := interIdx gN
  inter_primrec := primrec_interIdx gN hgNp
  inter_spec := by
    intro n m h
    obtain ⟨k, hk⟩ := h
    exact Xenum_inter_eq P₀ P₁ gN hgN n m ((Xenum_nonempty P₀ P₁ gN hgN k).mono hk)
  masterIdx := 0
  masterIdx_spec := by
    show Xenum P₀ P₁ gN 0 = Set.univ
    unfold Xenum
    rw [decodeList_zero]
    simp only [funListOf, List.map_nil, stepFun_nil, ite_self]
```

```
end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}

theorem interList_cons (base : Set β) (Y : Set β) (M : List (Set β)) :
    interList base (Y :: M) = Y ∩ interList base M := rfl

theorem mem_interList {base : Set β} {M : List (Set β)} {z : β} :
    z ∈ interList base M ↔ z ∈ base ∧ ∀ Y ∈ M, z ∈ Y := by
  induction M with
  | nil => simp
  | cons Y M ih =>
    rw [interList_cons]
    simp only [Set.mem_inter_iff, ih, List.mem_cons]
    constructor
    · rintro ⟨hY, hbase, hM⟩


      exact ⟨hbase, fun W hW => hW.elim (fun h => h ▸ hY) (hM W)⟩
    · rintro ⟨hbase, hall⟩
      exact ⟨hall Y (Or.inl rfl), hbase, fun W hW => hall W (Or.inr hW)⟩

theorem rel_interList_of_selection {f : ApproximableMap V₀ V₁}
    {Z : Set α} (hZ : V₀.mem Z) {sub : List (Set α × Set β)}
    (hmem : ∀ p ∈ sub, f.rel p.1 p.2) (hZle : ∀ p ∈ sub, Z ⊆ p.1) :
    f.rel Z (interList V₁.master (sub.map Prod.snd)) := by
  induction sub with
  | nil =>
    simp only [List.map_nil, interList_nil]
    exact f.mono f.master_rel (V₀.sub_master hZ) subset_rfl hZ V₁.master_mem
  | cons p sub ih =>
    have hp : f.rel p.1 p.2 := hmem p (List.mem_cons.mpr (Or.inl rfl))
    have hZp : f.rel Z p.2 :=
      f.mono hp (hZle p (List.mem_cons.mpr (Or.inl rfl))) subset_rfl hZ (f.rel_cod hp)
    have htail : f.rel Z (interList V₁.master (sub.map Prod.snd)) :=
      ih (fun q hq => hmem q (List.mem_cons.mpr (Or.inr hq)))
         (fun q hq => hZle q (List.mem_cons.mpr (Or.inr hq)))
    rw [List.map_cons, interList_cons]
    exact f.inter_right hZp htail

theorem interList_mem_of_stepFun_nonempty {L : List (Set α × Set β)}
    (h : (stepFun L : Set (ApproximableMap V₀ V₁)).Nonempty) {sub : List (Set α × Set
    β)}
    (hsub : sub.Sublist L) {Z : Set α} (hZ : V₀.mem Z) (hZle : ∀ p ∈ sub, Z ⊆ p.1) :
    V₁.mem (interList V₁.master (sub.map Prod.snd)) := by
  obtain ⟨f, hf⟩ := h
  have hmem : ∀ p ∈ sub, f.rel p.1 p.2 := fun p hp => hf p (hsub.subset hp)
  exact f.rel_cod (rel_interList_of_selection hZ hmem hZle)

variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

theorem stepFun_funListOf_nonempty_iff (el : List ℕ) :
    (stepFun (funListOf P₀ P₁ el) : Set (ApproximableMap V₀ V₁)).Nonempty ↔
      ∀ sub : List ℕ, sub.Sublist el →
```

```
      (∃ Z, V₀.mem Z ∧ ∀ e ∈ sub, Z ⊆ P₀.X e.unpair.1) →
        V₁.mem (interList V₁.master (sub.map (fun e => P₁.X e.unpair.2))) := by
constructor
·
  intro h sub hsub hcons
  obtain ⟨Z, hZ, hZle⟩ := hcons
  have hsub' : (sub.map (funPair P₀ P₁)).Sublist (funListOf P₀ P₁ el) := hsub.map _
  have hZle' : ∀ p ∈ sub.map (funPair P₀ P₁), Z ⊆ p.1 := by
    intro p hp
    rw [List.mem_map] at hp
    obtain ⟨e, he, rfl⟩ := hp
    exact hZle e he
  have hres := interList_mem_of_stepFun_nonempty h hsub' hZ hZle'
  have hlist : (sub.map (funPair P₀ P₁)).map Prod.snd = sub.map (fun e => P₁.X e.
  unpair.2) := by
    rw [List.map_map]; rfl
  rwa [hlist] at hres
·
  intro hcond
  have hL := funListOf_valid P₀ P₁ el
  have hcons : ∀ {X' : Set α}, V₀.mem X' →
      V₁.mem (interYs V₁.master (funListOf P₀ P₁ el) X') := by
    intro X' hX'
    obtain ⟨nx, hnx⟩ := P₀.surj hX'
    obtain ⟨finc, _, hfinc⟩ := P₀.incl_computable
    let : DecidablePred (fun e : ℕ => X' ⊆ P₀.X e.unpair.1) := fun e =>
      decidable_of_iff (finc (Nat.pair nx e.unpair.1) = 1) (by
        have h := hfinc (Nat.pair nx e.unpair.1)
        simp only [unpair_pair_fst, unpair_pair_snd] at h
        rw [hnx] at h
        exact h.symm)
    set sub : List ℕ := el.filter (fun e => decide (X' ⊆ P₀.X e.unpair.1)) with
  hsubdef
    have hsub : sub.Sublist el := List.filter_sublist
    have hmem_iff : ∀ e, e ∈ sub ↔ e ∈ el ∧ X' ⊆ P₀.X e.unpair.1 := by
      intro e
      rw [hsubdef, List.mem_filter, decide_eq_true_iff]
    have heq : interYs V₁.master (funListOf P₀ P₁ el) X'
        = interList V₁.master (sub.map (fun e => P₁.X e.unpair.2)) := by
      apply Set.ext; intro z
      rw [mem_interYs, mem_interList]
      constructor
      · rintro ⟨hzb, hall⟩
        refine ⟨hzb, ?_⟩
        intro Y hY
        rw [List.mem_map] at hY
        obtain ⟨e, hesub, rfl⟩ := hY
        have he := (hmem_iff e).mp hesub
        have hpair : funPair P₀ P₁ e ∈ funListOf P₀ P₁ el := List.mem_map.mpr ⟨e, he
  .1, rfl⟩
        exact hall (funPair P₀ P₁ e) hpair he.2
      · rintro ⟨hzb, hall⟩
        refine ⟨hzb, ?_⟩
        intro p hp hXp
        rw [funListOf, List.mem_map] at hp
        obtain ⟨e, hee, rfl⟩ := hp
```

```
          have hesub : e ∈ sub := (hmem_iff e).mpr ⟨hee, hXp⟩
          exact hall (P₁.X e.unpair.2) (List.mem_map.mpr ⟨e, hesub, rfl⟩)
      rw [heq]
      refine hcond sub hsub ⟨X', hX', ?_⟩
      intro e he
      exact ((hmem_iff e).mp he).2
    exact ⟨leastMap (funListOf P₀ P₁ el) hL hcons, leastMap_mem_stepFun hL hcons⟩

section ConsChain

variable {V : NeighborhoodSystem α} (P : ComputablePresentation V)

theorem mem_interFrom {A : Set α} {js : List ℕ} {z : α} :
    z ∈ interFrom P A js ↔ z ∈ A ∧ ∀ j ∈ js, z ∈ P.X j := by
  induction js generalizing A with
  | nil => simp [interFrom]
  | cons j js ih =>
    rw [interFrom, ih]
    simp only [Set.mem_inter_iff, List.mem_cons]
    constructor
    · rintro ⟨⟨hA, hj⟩, hrest⟩
      exact ⟨hA, fun j' hj' => hj'.elim (fun h => h ▸ hj) (hrest j')⟩
    · rintro ⟨hA, hall⟩
      exact ⟨⟨hA, hall j (Or.inl rfl)⟩, fun j' hj' => hall j' (Or.inr hj')⟩

theorem interFrom_subset {A : Set α} {js : List ℕ} : interFrom P A js ⊆ A :=
  fun _ hz => (mem_interFrom P |>.mp hz).1

theorem interFrom_mem_of_witness {A : Set α} {js : List ℕ} {Z : Set α}
    (hZ : V.mem Z) (hZsub : Z ⊆ interFrom P A js) (hA : V.mem A) :
    V.mem (interFrom P A js) := by
  induction js generalizing A with
  | nil => simpa [interFrom] using hA
  | cons j js ih =>
    rw [interFrom] at hZsub ⊢
    have hAXj : V.mem (A ∩ P.X j) :=
      V.inter_mem hA (P.mem_X j) hZ (hZsub.trans (interFrom_subset P))
    exact ih hZsub hAXj

theorem interFrom_eq_of_foldl : ∀ (js : List ℕ) (A : Set α) (a : ℕ),
    P.X a = A → V.mem A → V.mem (interFrom P A js) →
    P.X (js.foldl (fun acc j => P.inter acc j) a) = interFrom P A js
  | [], A, a, hXa, _, _ => by simpa [interFrom] using hXa
  | j :: js, A, a, hXa, hA, hmem => by
    have hmem' : V.mem (interFrom P (A ∩ P.X j) js) := by rwa [interFrom] at hmem
    have hAXj : V.mem (A ∩ P.X j) :=
      V.inter_mem hA (P.mem_X j) hmem' (interFrom_subset P)
    have hk : ∃ k, P.X k ⊆ P.X a ∩ P.X j := by
      obtain ⟨k, hk⟩ := P.surj hAXj
      exact ⟨k, by rw [hk, hXa]⟩
    have hXinter : P.X (P.inter a j) = A ∩ P.X j := by rw [P.inter_spec hk, hXa]
    rw [List.foldl_cons, interFrom]
    exact interFrom_eq_of_foldl js (A ∩ P.X j) (P.inter a j) hXinter hAXj hmem'

theorem idxchain_spec {js : List ℕ} (h : V.mem (interFrom P V.master js)) :
    P.X (idxchain P js) = interFrom P V.master js :=
```

```
  interFrom_eq_of_foldl P js V.master P.masterIdx P.masterIdx_spec V.master_mem h

end ConsChain

theorem bitSelect_cons (e : ℕ) (L : List ℕ) (b : ℕ) :
    bitSelect (e :: L) b =
      if b % 2 = 1 then e :: bitSelect L (b / 2) else bitSelect L (b / 2) := rfl

theorem bitSelect_sublist (L : List ℕ) (b : ℕ) : (bitSelect L b).Sublist L := by
  induction L generalizing b with
  | nil => simp
  | cons e L ih =>
    rw [bitSelect_cons]
    split
    · exact (ih (b / 2)).cons_cons e
    · exact (ih (b / 2)).cons e

theorem exists_bitSelect_lt {L sub : List ℕ} (hsub : sub.Sublist L) :
    ∃ b, b < 2 ^ L.length ∧ bitSelect L b = sub := by
  induction hsub with
  | slnil => exact ⟨0, by rw [List.length_nil, pow_zero]; exact Nat.one_pos, rfl⟩
  | @cons l₁ l₂ e _h ih =>
    obtain ⟨b, hb, heq⟩ := ih
    refine ⟨2 * b, ?_, ?_⟩
    · have hpow : 2 ^ (l₂.length + 1) = 2 ^ l₂.length * 2 := pow_succ 2 l₂.length
      rw [List.length_cons]; omega
    · rw [bitSelect_cons, ite_eq_right (by omega), show 2 * b / 2 = b by omega]; exact
    heq
  | @cons_cons l₁ l₂ e _h ih =>
    obtain ⟨b, hb, heq⟩ := ih
    refine ⟨2 * b + 1, ?_, ?_⟩
    · have hpow : 2 ^ (l₂.length + 1) = 2 ^ l₂.length * 2 := pow_succ 2 l₂.length
      rw [List.length_cons]; omega
    · rw [bitSelect_cons, ite_eq_left (by omega), show (2 * b + 1) / 2 = b by omega];
    rw [heq]

theorem forall_sublist_iff_forall_bitmask (c : ℕ) (p : List ℕ → Prop) :
    (∀ sub, sub.Sublist (decodeList c) → p sub) ↔
      ∀ b, b < 2 ^ c → p (bitSelect (decodeList c) b) := by
  constructor
  · intro hall b _; exact hall _ (bitSelect_sublist _ _)
  · intro hall sub hsub
    obtain ⟨b, hb, heq⟩ := exists_bitSelect_lt hsub
    have hb' : b < 2 ^ c :=
      Nat.lt_of_lt_of_le hb (Nat.pow_le_pow_right (Nat.le_succ 1) (
    decodeList_length_le c))
    rw [← heq]; exact hall b hb'

section ConsFold

variable {V : NeighborhoodSystem α} (P : ComputablePresentation V)

theorem consUpd_eval (projFn fc : ℕ → ℕ) (b idx flag x : ℕ) :
    consUpd P projFn fc (Nat.pair b (Nat.pair idx flag)) x =
      selectFn (b % 2)
        (Nat.pair (b / 2)
```

```
          (Nat.pair (P.inter idx (projFn x))
            (selectFn flag (isOne (fc (Nat.pair idx (projFn x)))) 0)))
        (Nat.pair (b / 2) (Nat.pair idx flag)) := by
  unfold consUpd
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem consUpd_foldl_flag_zero (projFn fc : ℕ → ℕ) (el : List ℕ) (b a : ℕ) :
    (List.foldl (fun s x => consUpd P projFn fc s x)
      (Nat.pair b (Nat.pair a 0)) el).unpair.2.unpair.2 = 0 := by
  induction el generalizing b a with
  | nil => simp only [List.foldl_nil, unpair_pair_snd]
  | cons e el ih =>
    rw [List.foldl_cons, consUpd_eval]
    by_cases hb : b % 2 = 1
    · rw [hb, selectFn_one, selectFn_zero]
      exact ih (b / 2) (P.inter a (projFn e))
    · rw [show b % 2 = 0 by omega, selectFn_zero]
      exact ih (b / 2) a

theorem consUpd_foldl_spec (projFn fc : ℕ → ℕ)
    (hfc : ∀ s, fc s = 1 ↔ ∃ k, P.X k ⊆ P.X s.unpair.1 ∩ P.X s.unpair.2)
    (el : List ℕ) (b a : ℕ) :
    (List.foldl (fun s x => consUpd P projFn fc s x)
        (Nat.pair b (Nat.pair a 1)) el).unpair.2.unpair.2 = 1 ↔
      V.mem (interFrom P (P.X a) (List.map projFn (bitSelect el b))) := by
  induction el generalizing b a with
  | nil =>
    have hL : (List.foldl (fun s x => consUpd P projFn fc s x)
        (Nat.pair b (Nat.pair a 1)) []).unpair.2.unpair.2 = 1 := by
      simp only [List.foldl_nil, unpair_pair_snd]
    rw [bitSelect_nil, List.map_nil, show interFrom P (P.X a) [] = P.X a from rfl]
    exact iff_of_true hL (P.mem_X a)
  | cons e el ih =>
    rw [List.foldl_cons, consUpd_eval, bitSelect_cons]
    by_cases hb : b % 2 = 1
    · rw [ite_eq_left hb, List.map_cons, hb, selectFn_one, selectFn_one,
        show interFrom P (P.X a) (projFn e :: List.map projFn (bitSelect el (b / 2)))
          = interFrom P (P.X a ∩ P.X (projFn e)) (List.map projFn (bitSelect el (b /
  2))) from rfl]
      by_cases hfce : fc (Nat.pair a (projFn e)) = 1
      · have hcons : ∃ k, P.X k ⊆ P.X a ∩ P.X (projFn e) := by
          have h := (hfc (Nat.pair a (projFn e))).mp hfce
          rwa [unpair_pair_fst, unpair_pair_snd] at h
        have hXa' : P.X (P.inter a (projFn e)) = P.X a ∩ P.X (projFn e) := P.
    inter_spec hcons
        rw [(isOne_eq_one_iff _).mpr hfce, ih (b / 2) (P.inter a (projFn e)), hXa']
      · have his0 : isOne (fc (Nat.pair a (projFn e))) = 0 := by
          have hle := isOne_le_one (fc (Nat.pair a (projFn e)))
          rcases (show isOne (fc (Nat.pair a (projFn e))) = 0 ∨
              isOne (fc (Nat.pair a (projFn e))) = 1 by omega) with h | h
          · exact h
          · exact absurd ((isOne_eq_one_iff _).mp h) hfce
        rw [his0]
        constructor
        · intro h
          rw [consUpd_foldl_flag_zero P projFn fc el (b / 2) (P.inter a (projFn e))]
```

```
    at h
          exact absurd h (by decide)
        · intro h
          exact absurd
            ((hfc (Nat.pair a (projFn e))).mpr (by
              obtain ⟨k, hk⟩ := P.surj h
              rw [unpair_pair_fst, unpair_pair_snd]
              exact ⟨k, by rw [hk]; exact interFrom_subset P⟩))
            hfce
    · rw [ite_eq_right hb, show b % 2 = 0 by omega, selectFn_zero]
      exact ih (b / 2) a

theorem consCharAt_spec (projFn fc : ℕ → ℕ)
    (hfc : ∀ s, fc s = 1 ↔ ∃ k, P.X k ⊆ P.X s.unpair.1 ∩ P.X s.unpair.2) (w : ℕ) :
    consCharAt P projFn fc w = 1 ↔
      V.mem (interFrom P V.master
        (List.map projFn (bitSelect (decodeList w.unpair.2) w.unpair.1))) := by
  unfold consCharAt
  rw [foldCode_eq']
  have hstep : (fun acc x => consStp P projFn fc (Nat.pair x (Nat.pair acc 0)))
      = (fun acc x => consUpd P projFn fc acc x) := by
    funext acc x
    show consStp P projFn fc (Nat.pair x (Nat.pair acc 0)) = _
    unfold consStp
    simp only [unpair_pair_fst, unpair_pair_snd]
  rw [hstep, consUpd_foldl_spec P projFn fc hfc (decodeList w.unpair.2) w.unpair.1 P.
    masterIdx,
    P.masterIdx_spec]

theorem primrec_consStp {projFn fc : ℕ → ℕ} (hprojp : Nat.Primrec projFn) (hfcp : Nat
    .Primrec fc) :
    Nat.Primrec (consStp P projFn fc) := by
  have hb : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1.unpair.1) :=
    Nat.Primrec.left.comp (Nat.Primrec.left.comp Nat.Primrec.right)
  have hidx : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp (Nat.Primrec.right.comp (Nat.Primrec.left.comp Nat.Primrec.
    right))
  have hflag : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp (Nat.Primrec.right.comp (Nat.Primrec.left.comp Nat.Primrec.
    right))
  have hpx : Nat.Primrec (fun w : ℕ => projFn w.unpair.1) := hprojp.comp Nat.Primrec.
    left
  have hpair := hidx.pair hpx
  have hinter := P.inter_primrec.comp hpair
  have hfcv := primrec_isOne.comp (hfcp.comp hpair)
  have hsel := primrec_selectFn hflag hfcv (Nat.Primrec.const 0)
  have hyes := (primrec_div2.comp hb).pair (hinter.pair hsel)
  have hno := (primrec_div2.comp hb).pair (hidx.pair hflag)
  refine (primrec_selectFn (primrec_mod2.comp hb) hyes hno).of_eq (fun w => ?_)
  unfold consStp consUpd
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem primrec_consCharAt {projFn fc : ℕ → ℕ} (hprojp : Nat.Primrec projFn)
    (hfcp : Nat.Primrec fc) : Nat.Primrec (consCharAt P projFn fc) := by
  have hfold := primrec_foldCode (primrec_consStp P hprojp hfcp) (Nat.Primrec.const 0)
    (Nat.Primrec.left.pair ((Nat.Primrec.const P.masterIdx).pair (Nat.Primrec.const 1)
```

```
    ))
    Nat.Primrec.right
  exact ((Nat.Primrec.right.comp Nat.Primrec.right).comp hfold).of_eq (fun _ => rfl)

theorem consFold_decidable (projFn fc : ℕ → ℕ)
    (hfc : ∀ s, fc s = 1 ↔ ∃ k, P.X k ⊆ P.X s.unpair.1 ∩ P.X s.unpair.2)
    (hprojp : Nat.Primrec projFn) (hfcp : Nat.Primrec fc) :
    RecDecidable (fun w =>
      V.mem (interFrom P V.master
        (List.map projFn (bitSelect (decodeList w.unpair.2) w.unpair.1)))) :=
  ⟨consCharAt P projFn fc, primrec_consCharAt P hprojp hfcp,
    fun w => (consCharAt_spec P projFn fc hfc w).symm⟩

end ConsFold

theorem interList_X_eq_interFrom {V : NeighborhoodSystem α} (P :
    ComputablePresentation V)
    (js : List ℕ) : interList V.master (js.map (fun j => P.X j)) = interFrom P V.
    master js := by
  apply Set.ext; intro z
  rw [mem_interList, mem_interFrom]
  constructor
  · rintro ⟨hb, hall⟩
    exact ⟨hb, fun j hj => hall (P.X j) (List.mem_map.mpr ⟨j, hj, rfl⟩)⟩
  · rintro ⟨hb, hall⟩
    refine ⟨hb, fun Y hY => ?_⟩
    rw [List.mem_map] at hY
    obtain ⟨j, hj, rfl⟩ := hY
    exact hall j hj

theorem antecedent_cons_iff (sub : List ℕ) :
    (∃ Z, V₀.mem Z ∧ ∀ e ∈ sub, Z ⊆ P₀.X e.unpair.1) ↔
      V₀.mem (interFrom P₀ V₀.master (sub.map (fun e => e.unpair.1))) := by
  constructor
  · rintro ⟨Z, hZ, hZle⟩
    refine interFrom_mem_of_witness P₀ hZ (fun z hz => ?_) V₀.master_mem
    rw [mem_interFrom]
    refine ⟨V₀.sub_master hZ hz, fun j hj => ?_⟩
    rw [List.mem_map] at hj
    obtain ⟨e, he, rfl⟩ := hj
    exact hZle e he hz
  · intro hmem
    refine ⟨P₀.X (idxchain P₀ (sub.map (fun e => e.unpair.1))), P₀.mem_X _, fun e he z
    hz => ?_⟩
    have hj : e.unpair.1 ∈ sub.map (fun e => e.unpair.1) := List.mem_map.mpr ⟨e, he,
    rfl⟩
    rw [idxchain_spec P₀ hmem] at hz
    exact (mem_interFrom P₀ |>.mp hz).2 _ hj

theorem funConsequent_eq (sub : List ℕ) :
    interList V₁.master (sub.map (fun e => P₁.X e.unpair.2))
      = interFrom P₁ V₁.master (sub.map (fun e => e.unpair.2)) := by
  rw [← interList_X_eq_interFrom P₁, List.map_map]; rfl

theorem funCons_iff (c : ℕ) :
    (stepFun (funListOf P₀ P₁ (decodeList c)) : Set (ApproximableMap V₀ V₁)).Nonempty ↔
```

```
      ∀ b, b < 2 ^ c →
        V₀.mem (interFrom P₀ V₀.master ((bitSelect (decodeList c) b).map (fun e => e.
    unpair.1))) →
          V₁.mem (interFrom P₁ V₁.master ((bitSelect (decodeList c) b).map (fun e => e.
    unpair.2))) := by
  rw [stepFun_funListOf_nonempty_iff]
  constructor
  · intro h b hb hant0
    have hsub : (bitSelect (decodeList c) b).Sublist (decodeList c) :=
    bitSelect_sublist _ _
    have hcons := h _ hsub ((antecedent_cons_iff P₀ (bitSelect (decodeList c) b)).mpr
    hant0)
    rwa [funConsequent_eq P₁] at hcons
  · intro h sub hsub hant
    obtain ⟨b, hb, heq⟩ := exists_bitSelect_lt hsub
    have hb' : b < 2 ^ c :=
      Nat.lt_of_lt_of_le hb (Nat.pow_le_pow_right (Nat.le_succ 1) (
    decodeList_length_le c))
    have hcons := h b hb' (by rw [heq]; exact (antecedent_cons_iff P₀ sub).mp hant)
    rw [heq, ← funConsequent_eq P₁] at hcons
    exact hcons

theorem funCons_decidable (fc0 fc1 : ℕ → ℕ)
    (hfc0 : ∀ s, fc0 s = 1 ↔ ∃ k, P₀.X k ⊆ P₀.X s.unpair.1 ∩ P₀.X s.unpair.2)
    (hfc1 : ∀ s, fc1 s = 1 ↔ ∃ k, P₁.X k ⊆ P₁.X s.unpair.1 ∩ P₁.X s.unpair.2)
    (hfc0p : Nat.Primrec fc0) (hfc1p : Nat.Primrec fc1) :
    RecDecidable (fun c =>
      (stepFun (funListOf P₀ P₁ (decodeList c)) : Set (ApproximableMap V₀ V₁)).Nonempty
    ) := by
  have hc0 := consFold_decidable P₀ (fun e => e.unpair.1) fc0 hfc0 Nat.Primrec.left
    hfc0p
  have hc1 := consFold_decidable P₁ (fun e => e.unpair.2) fc1 hfc1 Nat.Primrec.right
    hfc1p
  have himp : RecDecidable (fun w =>
      V₀.mem (interFrom P₀ V₀.master
          (List.map (fun e => e.unpair.1) (bitSelect (decodeList w.unpair.2) w.unpair
    .1))) →
        V₁.mem (interFrom P₁ V₁.master
          (List.map (fun e => e.unpair.2) (bitSelect (decodeList w.unpair.2) w.unpair
    .1)))) := by
    refine RecDecidable.of_iff (fun w => ?_) (hc0.not.or hc1)
    constructor
    · intro himp
      rcases hc0.em w with h0 | h0
      · exact Or.inr (himp h0)
      · exact Or.inl h0
    · rintro (h0 | h1) hp0
      · exact absurd hp0 h0
      · exact h1
  refine RecDecidable.of_iff (fun c => ?_)
    (himp.bForall (bound := fun n => 2 ^ n) (primrec_two_pow primrec_id))
  rw [funCons_iff P₀ P₁ c]
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem selectFn_one_iff_imp {A B : ℕ} (hA : A ≤ 1) :
    selectFn A B 1 = 1 ↔ (A = 1 → B = 1) := by
```

```
  rcases (show A = 0 ∨ A = 1 by omega) with h | h <;> subst h
  · rw [selectFn_zero]; simp

  · rw [selectFn_one]; simp

theorem funConsChar_spec (fc0 fc1 : ℕ → ℕ)
    (hfc0 : ∀ s, fc0 s = 1 ↔ ∃ k, P₀.X k ⊆ P₀.X s.unpair.1 ∩ P₀.X s.unpair.2)
    (hfc1 : ∀ s, fc1 s = 1 ↔ ∃ k, P₁.X k ⊆ P₁.X s.unpair.1 ∩ P₁.X s.unpair.2) (c : ℕ)
    :
    funConsChar P₀ P₁ fc0 fc1 c = 1 ↔
      (stepFun (funListOf P₀ P₁ (decodeList c)) : Set (ApproximableMap V₀ V₁)).Nonempty
     := by
  rw [funCons_iff P₀ P₁ c]
  unfold funConsChar
  rw [bForallFn_eq_one_iff]
  refine forall_congr' (fun b => ?_)
  refine imp_congr_right (fun hb => ?_)
  unfold funImpChar
  rw [selectFn_one_iff_imp (isOne_le_one _), isOne_eq_one_iff, isOne_eq_one_iff,
    consCharAt_spec P₀ (fun e => e.unpair.1) fc0 hfc0,
    consCharAt_spec P₁ (fun e => e.unpair.2) fc1 hfc1]
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem primrec_funImpChar (fc0 fc1 : ℕ → ℕ) (hfc0p : Nat.Primrec fc0) (hfc1p : Nat.
    Primrec fc1) :
    Nat.Primrec (funImpChar P₀ P₁ fc0 fc1) :=
  primrec_selectFn (primrec_isOne.comp (primrec_consCharAt P₀ Nat.Primrec.left hfc0p))
    (primrec_isOne.comp (primrec_consCharAt P₁ Nat.Primrec.right hfc1p)) (Nat.Primrec.
    const 1)

theorem primrec_funConsChar (fc0 fc1 : ℕ → ℕ) (hfc0p : Nat.Primrec fc0) (hfc1p : Nat.
    Primrec fc1) :
    Nat.Primrec (funConsChar P₀ P₁ fc0 fc1) := by
  have hgp := primrec_funImpChar P₀ P₁ fc0 fc1 hfc0p hfc1p
  have hGfn : Nat.Primrec (fun w => selectFn w.unpair.2.unpair.2
      (isOne (funImpChar P₀ P₁ fc0 fc1 (Nat.pair w.unpair.2.unpair.1 w.unpair.1))) 0)
    :=
    primrec_selectFn (Nat.Primrec.right.comp Nat.Primrec.right)
      (primrec_isOne.comp (hgp.comp
        ((Nat.Primrec.left.comp Nat.Primrec.right).pair Nat.Primrec.left)))
      (Nat.Primrec.const 0)
  have hprec := Nat.Primrec.prec (Nat.Primrec.const 1) hGfn
  refine (hprec.comp (primrec_id.pair (primrec_two_pow primrec_id))).of_eq (fun c => ?
    _)
  show _ = funConsChar P₀ P₁ fc0 fc1 c
  unfold funConsChar bForallFn
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]

end
end DomainTheory.NeighbourhoodSystems
end
```

PROPOSITION 7.12. The mapping

$$\lambda x_0, \ldots, x_{n-1}.\, \{x_0, \ldots, x_{n-1}\} : D^n \to \mathbb{P}D$$

is approximable and is computable if D is effectively given. Moreover, the map $\lambda x.\,\{x\}$ shows that $D \trianglelefteq \mathbb{P}D$, and we also have the law:

$$\{x_0, \ldots, x_{n-1}\} = \{x_0\} \cap \cdots \cap \{x_{n-1}\}$$

as an intersection of filters.

Proof : The second part shows that everything reduces to $\lambda x.\,\{x\}$. We see that

$$X_k\ (\lambda x.\,\{x\})\ \bigcup_{i<q}(\uparrow X_{n_i}) \text{ iff } \exists i < q.\, X_k \sqsubseteq X_{n_i}.$$

Thus, $\lambda x.\,\{x\}$ is an approximable mapping and is computable in the effectively given case.
The proof of the law can be reduced to the special case

$$\{x\} \cap \{y\} = \{x, y\}$$

for the sake of illustration. In terms of finite elements of the two domains D and $\mathbb{P}D$ we find

$$\{\uparrow X\} = \uparrow\uparrow X,$$

and so,

$$\begin{aligned}\{\uparrow X\} \cap \{\uparrow Y\} &= \uparrow\uparrow X \cap \uparrow\uparrow Y \\ &= \uparrow (\uparrow X \cup \uparrow Y) \\ &= \{\uparrow X, \uparrow Y\}.\end{aligned}$$

An equation between approximable functions that checks for finite elements also holds for all elements.
Finally, we note that

$$D \cong D^\dagger \trianglelefteq \mathbb{P}D$$

and that the isomorphism involved is just $\lambda x.\,\{x\}$ by what we saw on the finite elements. □
Further combinators on the power domain are given in the exercises.

3.8.14 Lecture VII exercises

EXERCISES

3.8.15 Exercise 7.13 — axiomatic neighbourhood structure

Exercise_7_13.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_1
public import Mathlib.Order.BourbakiWitt

@[expose] public section

section
```

```
namespace DomainTheory.NeighbourhoodSystems.Exercise713
open NeighborhoodSystem Domain.Recursive

structure InclStructure where

  INCL : ℕ → ℕ → Prop

  meetIdx : ℕ → ℕ → ℕ

  topIdx : ℕ

  incl_dec : RecDecidable₂ INCL

  cons_dec : RecDecidable₂ (fun n m => ∃ k, INCL k n ∧ INCL k m)

  meet_dec : RecDecidable₃ (fun n m k => ∀ j, INCL j k ↔ (INCL j n ∧ INCL j m))

  meetIdx_primrec : Nat.Primrec (fun t => meetIdx t.unpair.1 t.unpair.2)

  incl_refl : ∀ n, INCL n n

  incl_trans : ∀ {n m k}, INCL n m → INCL m k → INCL n k

  topIdx_spec : ∀ n, INCL n topIdx

  meetIdx_spec : ∀ {n m}, (∃ k, INCL k n ∧ INCL k m) →
    ∀ j, INCL j (meetIdx n m) ↔ (INCL j n ∧ INCL j m)

end DomainTheory.NeighbourhoodSystems.Exercise713
end

section
namespace DomainTheory.NeighbourhoodSystems.Exercise713
open NeighborhoodSystem Domain.Recursive

section
namespace InclStructure

variable (I : InclStructure)

def CONS (n m : ℕ) : Prop := ∃ k, I.INCL k n ∧ I.INCL k m

def MEET (n m k : ℕ) : Prop := ∀ j, I.INCL j k ↔ (I.INCL j n ∧ I.INCL j m)

def toNbhd (n : ℕ) : Set ℕ := {m | I.INCL m n}

@[simp] theorem mem_toNbhd {n m : ℕ} : m ∈ I.toNbhd n ↔ I.INCL m n := Iff.rfl

theorem toNbhd_inter_eq_iff (n m k : ℕ) :
    I.toNbhd n ∩ I.toNbhd m = I.toNbhd k ↔ I.MEET n m k := by
  unfold MEET
  rw [Set.ext_iff]
  refine forall_congr' fun j => ?_
  rw [Set.mem_inter_iff, mem_toNbhd, mem_toNbhd, mem_toNbhd]
  exact iff_comm
```

```
theorem toNbhd_subset_iff {n k : ℕ} : I.toNbhd n ⊆ I.toNbhd k ↔ I.INCL n k := by
  constructor
  · intro h
    exact h (I.incl_refl n)
  · intro hnk m hm
    exact I.incl_trans hm hnk

theorem toNbhd_subset_inter_iff (k n m : ℕ) :
    I.toNbhd k ⊆ I.toNbhd n ∩ I.toNbhd m ↔ (I.INCL k n ∧ I.INCL k m) := by
  rw [Set.subset_inter_iff, I.toNbhd_subset_iff, I.toNbhd_subset_iff]

theorem toNbhd_top : I.toNbhd I.topIdx = Set.univ := by
  ext m
  simp only [mem_toNbhd, Set.mem_univ, iff_true]
  exact I.topIdx_spec m

def toSystem : NeighborhoodSystem ℕ where
  mem Y := ∃ n, Y = I.toNbhd n
  master := Set.univ
  master_nonempty := Set.univ_nonempty
  master_mem := ⟨I.topIdx, I.toNbhd_top.symm⟩
  inter_mem := by
    rintro X Y Z ⟨n, rfl⟩ ⟨m, rfl⟩ ⟨l, rfl⟩ hZsub
    have hln : I.INCL l n := I.toNbhd_subset_iff.mp (hZsub.trans Set.inter_subset_left
    )
    have hlm : I.INCL l m := I.toNbhd_subset_iff.mp (hZsub.trans Set.
    inter_subset_right)
    exact ⟨I.meetIdx n m, (I.toNbhd_inter_eq_iff n m (I.meetIdx n m)).mpr
      (I.meetIdx_spec ⟨l, hln, hlm⟩)⟩
  sub_master := by rintro X _; exact Set.subset_univ X

@[simp] theorem toSystem_mem {Y : Set ℕ} : I.toSystem.mem Y ↔ ∃ n, Y = I.toNbhd n :=
    Iff.rfl

end InclStructure
end

section
variable {α : Type*} {V : NeighborhoodSystem α}

theorem meet_iff_interEq (P : ComputablePresentation V) (n m k : ℕ) :
    (∀ j, P.X j ⊆ P.X k ↔ (P.X j ⊆ P.X n ∧ P.X j ⊆ P.X m)) ↔ (P.X n ∩ P.X m = P.X k)
     := by
  constructor
  · intro h
    have hk : P.X k ⊆ P.X n ∩ P.X m :=
      Set.subset_inter ((h k).mp subset_rfl).1 ((h k).mp subset_rfl).2
    refine Set.Subset.antisymm ?_ hk
    have hmem : V.mem (P.X n ∩ P.X m) := V.inter_mem (P.mem_X n) (P.mem_X m) (P.mem_X
    k) hk
    obtain ⟨p, hp⟩ := P.surj hmem
    have hpk : P.X p ⊆ P.X k :=
      (h p).mpr (by rw [hp]; exact ⟨Set.inter_subset_left, Set.inter_subset_right⟩)
    exact hp ▸ hpk
  · intro h j
    rw [← h, Set.subset_inter_iff]
```

```
def ofPresentation (P : ComputablePresentation V) : InclStructure where
  INCL n m := P.X n ⊆ P.X m
  meetIdx := P.inter
  topIdx := P.masterIdx
  incl_dec := P.incl_computable
  cons_dec :=
    RecDecidable.of_iff
      (fun t => by
        refine exists_congr fun k => ?_
        exact (Set.subset_inter_iff).symm)
      P.cons_computable
  meet_dec :=
    RecDecidable.of_iff
      (fun t => meet_iff_interEq P t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair.2)
      P.interEq_computable
  meetIdx_primrec := P.inter_primrec
  incl_refl := fun _ => subset_rfl
  incl_trans := fun h1 h2 => h1.trans h2
  topIdx_spec := by
    intro n
    show P.X n ⊆ P.X P.masterIdx
    rw [P.masterIdx_spec]
    exact V.sub_master (P.mem_X n)
  meetIdx_spec := by
    intro n m hcons j
    obtain ⟨k, h1, h2⟩ := hcons
    have hcons' : ∃ k, P.X k ⊆ P.X n ∩ P.X m := ⟨k, Set.subset_inter h1 h2⟩
    show P.X j ⊆ P.X (P.inter n m) ↔ _
    rw [P.inter_spec hcons', Set.subset_inter_iff]

@[simp] theorem ofPresentation_INCL (P : ComputablePresentation V) (n m : ℕ) :
    (ofPresentation P).INCL n m ↔ P.X n ⊆ P.X m := Iff.rfl

@[simp] theorem mem_ofPresentation_toNbhd (P : ComputablePresentation V) (j n : ℕ) :
    j ∈ (ofPresentation P).toNbhd n ↔ P.X j ⊆ P.X n := Iff.rfl

theorem ofPresentation_toNbhd_eq_iff (P : ComputablePresentation V) (n m : ℕ) :
    (ofPresentation P).toNbhd n = (ofPresentation P).toNbhd m ↔ P.X n = P.X m := by
  rw [Set.Subset.antisymm_iff, (ofPresentation P).toNbhd_subset_iff,
    (ofPresentation P).toNbhd_subset_iff]
  show (P.X n ⊆ P.X m ∧ P.X m ⊆ P.X n) ↔ P.X n = P.X m
  exact (Set.Subset.antisymm_iff).symm

abbrev reconstruct (P : ComputablePresentation V) : NeighborhoodSystem ℕ :=
  (ofPresentation P).toSystem

def reconElem (P : ComputablePresentation V) (x : V.Element) : (reconstruct P).Element
    where
  mem Y := ∃ n, Y = (ofPresentation P).toNbhd n ∧ x.mem (P.X n)
  sub := by rintro Y ⟨n, rfl, _⟩; exact ⟨n, rfl⟩
  master_mem :=
    ⟨P.masterIdx, (ofPresentation P).toNbhd_top.symm, by rw [P.masterIdx_spec]; exact x
    .master_mem⟩
  inter_mem := by
    rintro X Y ⟨n, rfl, hxn⟩ ⟨m, rfl, hxm⟩
```

```
    have hmem : V.mem (P.X n ∩ P.X m) := x.sub (x.inter_mem hxn hxm)
    obtain ⟨q, hq⟩ := P.surj hmem
    refine ⟨q, ?_, ?_⟩
    · ext j
      rw [Set.mem_inter_iff, mem_ofPresentation_toNbhd, mem_ofPresentation_toNbhd,
        mem_ofPresentation_toNbhd, hq, Set.subset_inter_iff]
    · have : x.mem (P.X q) := by rw [hq]; exact x.inter_mem hxn hxm
      exact this
  up_mem := by
    rintro X Y ⟨n, rfl, hxn⟩ ⟨m, rfl⟩ hsub
    have hnm : P.X n ⊆ P.X m := (ofPresentation P).toNbhd_subset_iff.mp hsub
    exact ⟨m, rfl, x.up_mem hxn (P.mem_X m) hnm⟩

def reconElemInv (P : ComputablePresentation V) (y : (reconstruct P).Element) : V.
    Element where
  mem W := ∃ n, W = P.X n ∧ y.mem ((ofPresentation P).toNbhd n)
  sub := by rintro W ⟨n, rfl, _⟩; exact P.mem_X n
  master_mem :=
    ⟨P.masterIdx, P.masterIdx_spec.symm, by
      rw [show (ofPresentation P).toNbhd P.masterIdx = Set.univ from (ofPresentation P
    ).toNbhd_top]
      exact y.master_mem⟩
  inter_mem := by
    rintro X Y ⟨n, rfl, hyn⟩ ⟨m, rfl, hym⟩
    obtain ⟨p, hp⟩ := y.sub (y.inter_mem hyn hym)
    have hpmem : p ∈ (ofPresentation P).toNbhd n ∩ (ofPresentation P).toNbhd m :=
      hp ▸ ((ofPresentation P).mem_toNbhd.mpr ((ofPresentation P).incl_refl p))
    rw [Set.mem_inter_iff, mem_ofPresentation_toNbhd, mem_ofPresentation_toNbhd] at
    hpmem
    have hwit : P.X p ⊆ P.X n ∩ P.X m := Set.subset_inter hpmem.1 hpmem.2
    have hmem : V.mem (P.X n ∩ P.X m) := V.inter_mem (P.mem_X n) (P.mem_X m) (P.mem_X
    p) hwit
    obtain ⟨q, hq⟩ := P.surj hmem
    refine ⟨q, hq.symm, ?_⟩
    have htoNbhd : (ofPresentation P).toNbhd q
        = (ofPresentation P).toNbhd n ∩ (ofPresentation P).toNbhd m := by
      ext j
      rw [Set.mem_inter_iff, mem_ofPresentation_toNbhd, mem_ofPresentation_toNbhd,
        mem_ofPresentation_toNbhd, hq, Set.subset_inter_iff]
    rw [htoNbhd]
    exact y.inter_mem hyn hym
  up_mem := by
    rintro W Z ⟨n, rfl, hyn⟩ hZ hWZ
    obtain ⟨p, hp⟩ := P.surj hZ
    refine ⟨p, hp.symm, ?_⟩
    have hnp : (ofPresentation P).toNbhd n ⊆ (ofPresentation P).toNbhd p :=
      (ofPresentation P).toNbhd_subset_iff.mpr (by show P.X n ⊆ P.X p; rw [hp]; exact
    hWZ)
    exact y.up_mem hyn ⟨p, rfl⟩ hnp

def reconIso (P : ComputablePresentation V) : V.Element ≃o (reconstruct P).Element
    where
  toFun := reconElem P
  invFun := reconElemInv P
  left_inv := by
    intro x
```

```
    apply Element.ext
    intro W
    constructor
    · rintro ⟨n, rfl, m, hWm, hxm⟩
      rw [ofPresentation_toNbhd_eq_iff] at hWm
      rw [hWm]; exact hxm
    · intro hxW
      obtain ⟨n, hn⟩ := P.surj (x.sub hxW)
      exact ⟨n, hn.symm, n, rfl, by rw [hn]; exact hxW⟩
  right_inv := by
    intro y
    apply Element.ext
    intro T
    constructor
    · rintro ⟨n, rfl, m, hXm, hym⟩
      have : (ofPresentation P).toNbhd n = (ofPresentation P).toNbhd m :=
        (ofPresentation_toNbhd_eq_iff P n m).mpr hXm
      rw [this]; exact hym
    · intro hyT
      obtain ⟨n, hn⟩ := y.sub hyT
      exact ⟨n, hn, n, rfl, by rw [← hn]; exact hyT⟩
  map_rel_iff' := by
    intro x x'
    constructor
    · intro h W hxW
      obtain ⟨n, hn⟩ := P.surj (x.sub hxW)
      have hmem : (reconElem P x).mem ((ofPresentation P).toNbhd n) :=
        ⟨n, rfl, by rw [hn]; exact hxW⟩
      obtain ⟨m, hm, hx'm⟩ := h ((ofPresentation P).toNbhd n) hmem
      rw [ofPresentation_toNbhd_eq_iff] at hm
      rw [← hn, hm]; exact hx'm
    · intro h Y hY
      obtain ⟨n, rfl, hxn⟩ := hY
      exact ⟨n, rfl, h (P.X n) hxn⟩

end

section
namespace InclStructure

variable (I : InclStructure)

def toPresentation : ComputablePresentation I.toSystem where
  X := I.toNbhd
  mem_X n := ⟨n, rfl⟩
  surj := by rintro Y ⟨n, rfl⟩; exact ⟨n, rfl⟩
  interEq_computable :=
    RecDecidable.of_iff
      (fun t => (I.toNbhd_inter_eq_iff t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.
    unpair.2))
      I.meet_dec
  cons_computable :=
    RecDecidable.of_iff
      (fun t => by
        refine exists_congr fun k => ?_
        exact I.toNbhd_subset_inter_iff k t.unpair.1 t.unpair.2)
```

```
      I.cons_dec
  inter := I.meetIdx
  inter_primrec := I.meetIdx_primrec
  inter_spec := by
    intro n m hcons
    obtain ⟨k, hk⟩ := hcons
    rw [Set.subset_inter_iff] at hk
    have hcons' : I.CONS n m := ⟨k, I.toNbhd_subset_iff.mp hk.1, I.toNbhd_subset_iff.mp
     hk.2⟩
    exact ((I.toNbhd_inter_eq_iff n m (I.meetIdx n m)).mpr (I.meetIdx_spec hcons')).
    symm
  masterIdx := I.topIdx
  masterIdx_spec := I.toNbhd_top

theorem axiom_i (n : ℕ) : I.INCL n n := I.incl_refl n

theorem axiom_ii {n m k : ℕ} (h1 : I.INCL n m) (h2 : I.INCL m k) : I.INCL n k := I.
    incl_trans h1 h2

theorem axiom_iii : ∃ m, ∀ n, I.INCL n m := ⟨I.topIdx, I.topIdx_spec⟩

theorem axiom_iv (n m : ℕ) (h : I.CONS n m) : ∃ k, I.MEET n m k :=
  ⟨I.meetIdx n m, I.meetIdx_spec h⟩

end InclStructure
end

section
variable {α : Type*} {V : NeighborhoodSystem α}

theorem ofPresentation_toPresentation_INCL (I : InclStructure) (n m : ℕ) :
    (ofPresentation I.toPresentation).INCL n m ↔ I.INCL n m := by
  show I.toNbhd n ⊆ I.toNbhd m ↔ I.INCL n m
  exact I.toNbhd_subset_iff

theorem reconstruct_isomorphic (P : ComputablePresentation V) : reconstruct P ≅? V :=
  ⟨(reconIso P).symm⟩

end

section
namespace InclStructure

variable (I : InclStructure)

theorem toSystem_isEffectivelyGiven : I.toSystem.IsEffectivelyGiven := ⟨I.
    toPresentation⟩

end InclStructure
end

section
set_option linter.unusedVariables false

theorem example_713.{u_1} : And
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
```

```
    (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V),
    @DomainTheory.NeighbourhoodSystems.Isomorphic Nat α
      (@DomainTheory.NeighbourhoodSystems.Exercise713.reconstruct α V P) V)
  (∀ (I : DomainTheory.NeighbourhoodSystems.Exercise713.InclStructure),
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven Nat I.
    toSystem) :=
  @And.intro
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V),
    @DomainTheory.NeighbourhoodSystems.Isomorphic Nat α
      (@DomainTheory.NeighbourhoodSystems.Exercise713.reconstruct α V P) V)
  (∀ (I : DomainTheory.NeighbourhoodSystems.Exercise713.InclStructure),
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven Nat I.
    toSystem)
  (@DomainTheory.NeighbourhoodSystems.Exercise713.reconstruct_isomorphic)
  DomainTheory.NeighbourhoodSystems.Exercise713.InclStructure.
    toSystem_isEffectivelyGiven
end

end DomainTheory.NeighbourhoodSystems.Exercise713
end
```

EXERCISE 7.13. Show that an effectively given domain can always be identified with a relation $\mathrm{INCL}(n, m)$ on integers, where the two derived relations

$$\mathrm{CONS}(n, m) \text{ iff } \exists k.\, \mathrm{INCL}(k, n) \text{ and } \mathrm{INCL}(k, m);$$

$$\mathrm{MEET}(n, m, k) \text{ iff } \forall j\, [\mathrm{INCL}(j, k) \text{ iff } \mathrm{INCL}(j, n) \text{ and } \mathrm{INCL}(j, m)]$$

are both recursively decidable, and where the following axioms hold:

(i) $\forall n.\, \mathrm{INCL}(n, n)$;

(ii) $\forall n, m, k.\, \mathrm{INCL}(n, m)$ and $\mathrm{INCL}(m, k)$ imply $\mathrm{INCL}(n, k)$;

(iii) $\exists m\, \forall n.\, \mathrm{INCL}(n, m)$

(iv) $\forall n, m.\, \mathrm{CONS}(n, m)$ implies $\exists k.\, \mathrm{MEET}(n, m, k)$.

(Hint: Consider the neighbourhood system

$$\mathcal{D} = \big\{\{m \in \mathbf{N} \mid \mathrm{INCL}(m, n)\} \mid n \in \mathbf{N}\big\}.$$

Is this essentially any effectively given system?)

3.8.16 Exercise 7.14 — primitive recursive witnesses

Exercise_7_14.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_2
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_9

@[expose] public section

section

namespace DomainTheory.NeighbourhoodSystems.Exercise714

open NeighborhoodSystem Domain.Recursive DomainTheory.NeighbourhoodSystems

variable {β : Type*}

def tFun {W : NeighborhoodSystem β} (Q : ComputablePresentation W) (r : ℕ → ℕ) (n : ℕ
    ) :
    ℕ :=
  Nat.rec (motive := fun _ => ℕ) (r 0) (fun y IH => Q.inter IH (r (y + 1))) n

end DomainTheory.NeighbourhoodSystems.Exercise714
end

section
namespace DomainTheory.NeighbourhoodSystems.Exercise714
open NeighborhoodSystem Domain.Recursive DomainTheory.NeighbourhoodSystems

section

theorem repred_exists_primrec_range {p : ℕ → Prop} (hp : REPred p) {a : ℕ} (ha : p a)
     :
    ∃ r : ℕ → ℕ, Nat.Primrec r ∧ ∀ n, p n ↔ ∃ i, r i = n := by
  obtain ⟨q, ⟨qc, hqcp, hqcs⟩, hqe⟩ := hp
  refine ⟨fun w => selectFn (isOne (qc w)) w.unpair.2 a,
    primrec_selectFn (primrec_isOne.comp hqcp) Nat.Primrec.right (Nat.Primrec.const a)
    , ?_⟩

  have hrw_mem : ∀ w, p (selectFn (isOne (qc w)) w.unpair.2 a) := by
    intro w
    rcases (show isOne (qc w) = 0 ∨ isOne (qc w) = 1 by
        have := isOne_le_one (qc w); omega) with h0 | h1
    · rw [h0, selectFn_zero]; exact ha
    · rw [h1, selectFn_one]
      have hqw : q w := (hqcs w).mpr ((isOne_eq_one_iff (qc w)).mp h1)
      rw [hqe w.unpair.2]
      exact ⟨w.unpair.1, by rw [pair_unpair]; exact hqw⟩
  intro n
  constructor
  · intro hpn
    rw [hqe n] at hpn
    obtain ⟨i, hi⟩ := hpn
    refine ⟨Nat.pair i n, ?_⟩
    show selectFn (isOne (qc (Nat.pair i n))) (Nat.pair i n).unpair.2 a = n
```

```
    have hqc1 : isOne (qc (Nat.pair i n)) = 1 := (isOne_eq_one_iff _).mpr ((hqcs _).mp
     hi)
    rw [hqc1, selectFn_one, unpair_pair_snd]
  · rintro ⟨w, rfl⟩
    exact hrw_mem w

variable {β : Type*}

theorem tFun_zero {W : NeighborhoodSystem β} (Q : ComputablePresentation W) (r : ℕ →
    ℕ) :
    tFun Q r 0 = r 0 := rfl

private theorem tFun_succ {W : NeighborhoodSystem β} (Q : ComputablePresentation W) (r
     : ℕ → ℕ)
    (i : ℕ) : tFun Q r (i + 1) = Q.inter (tFun Q r i) (r (i + 1)) := rfl

private theorem primrec_tFun {W : NeighborhoodSystem β} (Q : ComputablePresentation W)
     {r : ℕ → ℕ}
    (hr : Nat.Primrec r) : Nat.Primrec (tFun Q r) := by
  have hg : Nat.Primrec (fun w => Q.inter w.unpair.2.unpair.2 (r (w.unpair.2.unpair.1
    + 1))) := by
    have hIH : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
      Nat.Primrec.right.comp Nat.Primrec.right
    have hy1 : Nat.Primrec (fun w : ℕ => r (w.unpair.2.unpair.1 + 1)) :=
      hr.comp (Nat.Primrec.succ.comp (Nat.Primrec.left.comp Nat.Primrec.right))
    exact (Q.inter_primrec.comp (hIH.pair hy1)).of_eq fun w => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  refine ((Nat.Primrec.prec (Nat.Primrec.const (r 0)) hg).comp
    ((Nat.Primrec.const 0).pair primrec_id)).of_eq (fun n => ?_)
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]
  rfl

theorem computableElement_eq_decreasing_iUnion_principal {W : NeighborhoodSystem β}
    (Q : ComputablePresentation W) {y : W.Element} (hy : ComputableElement Q y) :
    ∃ t : ℕ → ℕ, Nat.Primrec t ∧
      (∀ i, Q.X (t (i + 1)) ⊆ Q.X (t i)) ∧
      (∀ Z, y.mem Z ↔ ∃ i, (W.principal (Q.mem_X (t i))).mem Z) := by
  have hy' : REPred (fun m => y.mem (Q.X m)) := hy.out

  obtain ⟨m₀, hm₀⟩ := Q.surj W.master_mem
  have hwit : y.mem (Q.X m₀) := by rw [hm₀]; exact y.master_mem
  obtain ⟨r₀, hr₀, hr0_spec⟩ := repred_exists_primrec_range hy' hwit

  have hr0_mem : ∀ i, y.mem (Q.X (r₀ i)) := fun i => (hr0_spec (r₀ i)).mpr ⟨i, rfl⟩

  have hcons : ∀ a c : ℕ, y.mem (Q.X a) → y.mem (Q.X c) →
      ∃ k, Q.X k ⊆ Q.X a ∩ Q.X c := by
    intro a c ha hc
    obtain ⟨k, hk⟩ := Q.surj (y.sub (y.inter_mem ha hc))
    exact ⟨k, hk.subset⟩

  have ht_mem : ∀ i, y.mem (Q.X (tFun Q r₀ i)) := by
    intro i
    induction i with
    | zero => rw [tFun_zero]; exact hr0_mem 0
    | succ k ih =>
```

```
      have heq : Q.X (tFun Q r₀ (k + 1)) = Q.X (tFun Q r₀ k) ∩ Q.X (r₀ (k + 1)) :=
        Q.inter_spec (hcons (tFun Q r₀ k) (r₀ (k + 1)) ih (hr0_mem (k + 1)))
      rw [heq]; exact y.inter_mem ih (hr0_mem (k + 1))

  have ht_eq : ∀ i, Q.X (tFun Q r₀ (i + 1)) = Q.X (tFun Q r₀ i) ∩ Q.X (r₀ (i + 1)) :=
    fun i =>
    Q.inter_spec (hcons (tFun Q r₀ i) (r₀ (i + 1)) (ht_mem i) (hr0_mem (i + 1)))

  have ht_dec : ∀ i, Q.X (tFun Q r₀ (i + 1)) ⊆ Q.X (tFun Q r₀ i) := by
    intro i; rw [ht_eq i]; exact Set.inter_subset_left

  have ht_sub_r : ∀ i, Q.X (tFun Q r₀ i) ⊆ Q.X (r₀ i) := by
    intro i
    cases i with
    | zero => rw [tFun_zero]
    | succ k => rw [ht_eq k]; exact Set.inter_subset_right
  refine ⟨tFun Q r₀, primrec_tFun Q hr₀, ht_dec, fun Z => ?_⟩
  constructor
  · intro hZ
    obtain ⟨m, hm⟩ := Q.surj (y.sub hZ)
    have hym : y.mem (Q.X m) := by rw [hm]; exact hZ
    obtain ⟨i, hi⟩ := (hr0_spec m).mp hym
    have hZeq : Q.X (r₀ i) = Z := by rw [hi]; exact hm
    exact ⟨i, y.sub hZ, by rw [← hZeq]; exact ht_sub_r i⟩
  · rintro ⟨i, hWZ, hsub⟩
    exact y.up_mem (ht_mem i) hWZ hsub
end

section
set_option linter.unusedVariables false

theorem example_714.{u_1} : ∀ {β : Type u_1} {W : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem β}
  (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W)
  {y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element β W},
  @DomainTheory.NeighbourhoodSystems.ComputableElement β W Q y →
    ∃ (t : Nat → Nat),
      And (Nat.Primrec t)
        (And
          (∀ (i : Nat),
            @LE.le (Set β) (@Set.instLE β)
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W Q
                (t
                  (@HAdd.hAdd Nat Nat Nat (@instHAdd Nat instAddNat) i
                    (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))))
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W Q (t i)
  ))
          (∀ (Z : Set β),
            Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem β W
    y Z)
              (∃ (i : Nat),
                @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem β W
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal β W
                    (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W Q
    (t i))
```

```
                    (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.mem_X β
     W Q (t i)))
                  Z))) :=
  @DomainTheory.NeighbourhoodSystems.Exercise714.
    computableElement_eq_decreasing_iUnion_principal
end

section

theorem repred_range_primrec {r : ℕ → ℕ} (hr : Nat.Primrec r) :
    REPred (fun n => ∃ i, r i = n) := by
  refine ⟨fun t => r t.unpair.1 = t.unpair.2,
    RecDecidable.natEq (hr.comp Nat.Primrec.left) Nat.Primrec.right, fun n => ?_⟩
  refine exists_congr (fun i => ?_)
  simp only [unpair_pair_fst, unpair_pair_snd]
end

section

theorem repred₂_exists_primrec_enum {p : ℕ → ℕ → Prop} (hp : REPred₂ p) {a b : ℕ}
    (hab : p a b) :
    ∃ s r : ℕ → ℕ, Nat.Primrec s ∧ Nat.Primrec r ∧
      ∀ n m, p n m ↔ ∃ i, s i = n ∧ r i = m := by
  have hp' : REPred (fun t => p t.unpair.1 t.unpair.2) := hp
  have hwit : (fun t => p t.unpair.1 t.unpair.2) (Nat.pair a b) := by
    simp only [unpair_pair_fst, unpair_pair_snd]; exact hab
  obtain ⟨pf, hpf, hspec⟩ := repred_exists_primrec_range hp' hwit
  refine ⟨fun i => (pf i).unpair.1, fun i => (pf i).unpair.2,
    Nat.Primrec.left.comp hpf, Nat.Primrec.right.comp hpf, fun n m => ?_⟩
  have h := hspec (Nat.pair n m)
  simp only [unpair_pair_fst, unpair_pair_snd] at h
  rw [h]
  constructor
  · rintro ⟨i, hi⟩
    refine ⟨i, ?_, ?_⟩
    · show (pf i).unpair.1 = n; rw [hi, unpair_pair_fst]
    · show (pf i).unpair.2 = m; rw [hi, unpair_pair_snd]
  · rintro ⟨i, hs, hr⟩
    refine ⟨i, ?_⟩
    change (pf i).unpair.1 = n at hs
    change (pf i).unpair.2 = m at hr
    rw [← hs, ← hr]; exact (pair_unpair _).symm
end

end DomainTheory.NeighbourhoodSystems.Exercise714
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive

section
namespace NeighborhoodSystem

variable {α : Type*} (V : NeighborhoodSystem α)

theorem PDmem_upSet_inter {X Y : Set α} (hX : V.mem X) (hY : V.mem Y) :
    V.PDmem (V.upSet X ∩ V.upSet Y) := by
  rw [V.upSet_inter]
```

```
  by_cases h : V.mem (X ∩ Y)
  · exact V.PDmem_upSet h
  · have hempty : V.upSet (X ∩ Y) = ∅ := by
      ext Z
      simp only [mem_upSet, Set.mem_empty_iff_false, iff_false, not_and]
      intro hZmem hZsub
      exact h (V.inter_mem hX hY hZmem hZsub)
    rw [hempty]; exact V.PDmem_empty

theorem upSetUnion_cons (Y : Set α) (L : List (Set α)) :
    (⋃ X ∈ (Y :: L), V.upSet X) = V.upSet Y ∪ ⋃ X ∈ L, V.upSet X := by
  ext z
  rw [Set.mem_union, V.mem_PDunion, V.mem_PDunion]
  constructor
  · rintro ⟨X, hX, hz⟩
    rcases List.mem_cons.mp hX with rfl | hX'
    · exact Or.inl hz
    · exact Or.inr ⟨X, hX', hz⟩
  · rintro (hz | ⟨X, hX, hz⟩)
    · exact ⟨Y, List.mem_cons.mpr (Or.inl rfl), hz⟩
    · exact ⟨X, List.mem_cons.mpr (Or.inr hX), hz⟩

theorem upSetUnion_nil : (⋃ X ∈ ([] : List (Set α)), V.upSet X) = ∅ := by
  ext z
  rw [V.mem_PDunion]
  simp only [List.not_mem_nil, false_and, exists_false, Set.mem_empty_iff_false]

theorem PDmem_upSet_inter_biUnion {X : Set α} (hX : V.mem X) :
    ∀ (L : List (Set α)), (∀ Y ∈ L, V.mem Y) → V.PDmem (V.upSet X ∩ ⋃ Y ∈ L, V.upSet
    Y) := by
  intro L
  induction L with
  | nil =>
    intro _
    rw [V.upSetUnion_nil, Set.inter_empty]
    exact V.PDmem_empty
  | cons Y L ih =>
    intro hL
    rw [V.upSetUnion_cons, Set.inter_union_distrib_left]
    exact V.PDmem_union (V.PDmem_upSet_inter hX (hL Y (List.mem_cons.mpr (Or.inl rfl))
    ))
      (ih (fun Z hZ => hL Z (List.mem_cons.mpr (Or.inr hZ))))

theorem PDmem_biUnion_inter :
    ∀ (L₁ : List (Set α)), (∀ X ∈ L₁, V.mem X) → ∀ {W₂ : Set (Set α)}, V.PDmem W₂ →
      V.PDmem ((⋃ X ∈ L₁, V.upSet X) ∩ W₂) := by
  intro L₁
  induction L₁ with
  | nil =>
    intro _ W₂ _
    rw [V.upSetUnion_nil, Set.empty_inter]
    exact V.PDmem_empty
  | cons X L ih =>
    intro hL W₂ hW₂
    rw [V.upSetUnion_cons, Set.union_inter_distrib_right]
    refine V.PDmem_union ?_ (ih (fun Z hZ => hL Z (List.mem_cons.mpr (Or.inr hZ))) hW₂)
```

```
    obtain ⟨L₂, hL₂, rfl⟩ := hW₂
    exact V.PDmem_upSet_inter_biUnion (hL X (List.mem_cons.mpr (Or.inl rfl))) L₂ hL₂

theorem PDmem_inter {W₁ W₂ : Set (Set α)} (h₁ : V.PDmem W₁) (h₂ : V.PDmem W₂) :
    V.PDmem (W₁ ∩ W₂) := by
  obtain ⟨L₁, hL₁, rfl⟩ := h₁
  exact V.PDmem_biUnion_inter L₁ hL₁ h₂

end NeighborhoodSystem
end
end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 7.14. (For recursive-function theorists.) Prove the statements after definition 7.2 about the existence of primitive recursive functions for showing things recursively enumerable. (Recall that a non-empty set is r.e. iff it is the range of a primitive recursive function.) Show also that every computable element $y \in |E|$ can be written

$$y = \bigcup \{\uparrow Y_{t(i)} \mid i \in \mathbf{N}\},$$

where $t : \mathbf{N} \to \mathbf{N}$ is primitive recursive and where we may assume
$Y_{t(i+1)} \subseteq Y_{t(i)}$
for all $i \in \mathbf{N}$.

3.8.17 Exercise 7.15 — further constructs effective

Exercise_7_15.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_4

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive Example61
open NeighborhoodSystem Domain.Recursive ApproximableMap
section
variable {α β ? : Type*}
open Exercise510

section Smash
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)
variable {P₀ P₁}
variable (P₀ P₁)

noncomputable def smashPresentation : ScottPresentation (smash V₀ V₁) where
  X := smashEnum P₀ P₁
  mem_X := smashEnum_mem
  surj := by
```

```
  rintro Z (rfl | ⟨X, Y, hX, hXne, hY, hYne, rfl⟩)
  · refine ⟨Nat.pair P₀.masterIdx P₁.masterIdx, ?_⟩
    rw [smashEnum_master (by
      rw [unpair_pair_fst, P₀.masterIdx_spec]; exact fun h => h.1 rfl)]
  · obtain ⟨n, rfl⟩ := P₀.surj hX
    obtain ⟨m, rfl⟩ := P₁.surj hY
    refine ⟨Nat.pair n m, ?_⟩
    rw [smashEnum_proper (by rw [unpair_pair_fst, unpair_pair_snd]; exact ⟨hXne, hYne
  ⟩),
      unpair_pair_fst, unpair_pair_snd]
interEq_computable := by
  obtain ⟨f₀, hf₀p, hf₀e⟩ := proper₀_dec P₀
  obtain ⟨f₁, hf₁p, hf₁e⟩ := proper₁_dec P₁
  set c₀ := fun n => isOne (f₀ n) with hc₀def
  set c₁ := fun n => isOne (f₁ n) with hc₁def
  have hc₀le : ∀ n, c₀ n ≤ 1 := fun n => isOne_le_one _
  have hc₁le : ∀ n, c₁ n ≤ 1 := fun n => isOne_le_one _
  have hc₀ : ∀ n, P₀.X n = V₀.master ↔ c₀ n = 1 := fun n => by
    rw [hc₀def, isOne_eq_one_iff]; exact hf₀e n
  have hc₁ : ∀ n, P₁.X n = V₁.master ↔ c₁ n = 1 := fun n => by
    rw [hc₁def, isOne_eq_one_iff]; exact hf₁e n
  have hc₀p : Nat.Primrec c₀ := primrec_isOne.comp hf₀p
  have hc₁p : Nat.Primrec c₁ := primrec_isOne.comp hf₁p
  have hpf : Nat.Primrec (fun n => c₀ n.unpair.1 * c₁ n.unpair.2) :=
    (primrec_mul.comp ((hc₀p.comp Nat.Primrec.left).pair (hc₁p.comp Nat.Primrec.right
  ))).of_eq
      (fun n => by simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd])

  have heffLp : Nat.Primrec (fun n => selectFn (c₀ n.unpair.1 * c₁ n.unpair.2)
      n.unpair.1 P₀.masterIdx) :=
    primrec_selectFn hpf Nat.Primrec.left (Nat.Primrec.const _)
  have heffRp : Nat.Primrec (fun n => selectFn (c₀ n.unpair.1 * c₁ n.unpair.2)
      n.unpair.2 P₁.masterIdx) :=
    primrec_selectFn hpf Nat.Primrec.right (Nat.Primrec.const _)

  have hgL : Nat.Primrec (fun t => Nat.pair
      (selectFn (c₀ t.unpair.1.unpair.1 * c₁ t.unpair.1.unpair.2) t.unpair.1.unpair.1
   P₀.masterIdx)
      (Nat.pair
        (selectFn (c₀ t.unpair.2.unpair.1.unpair.1 * c₁ t.unpair.2.unpair.1.unpair.2)
          t.unpair.2.unpair.1.unpair.1 P₀.masterIdx)
        (selectFn (c₀ t.unpair.2.unpair.2.unpair.1 * c₁ t.unpair.2.unpair.2.unpair.2)
          t.unpair.2.unpair.2.unpair.1 P₀.masterIdx))) :=
    (heffLp.comp Nat.Primrec.left).pair
      ((heffLp.comp (Nat.Primrec.left.comp Nat.Primrec.right)).pair
        (heffLp.comp (Nat.Primrec.right.comp Nat.Primrec.right)))
  have hgR : Nat.Primrec (fun t => Nat.pair
      (selectFn (c₀ t.unpair.1.unpair.1 * c₁ t.unpair.1.unpair.2) t.unpair.1.unpair.2
   P₁.masterIdx)
      (Nat.pair
        (selectFn (c₀ t.unpair.2.unpair.1.unpair.1 * c₁ t.unpair.2.unpair.1.unpair.2)
          t.unpair.2.unpair.1.unpair.2 P₁.masterIdx)
        (selectFn (c₀ t.unpair.2.unpair.2.unpair.1 * c₁ t.unpair.2.unpair.2.unpair.2)
          t.unpair.2.unpair.2.unpair.2 P₁.masterIdx))) :=
    (heffRp.comp Nat.Primrec.left).pair
      ((heffRp.comp (Nat.Primrec.left.comp Nat.Primrec.right)).pair
```

```
      (heffRp.comp (Nat.Primrec.right.comp Nat.Primrec.right)))
  refine RecDecidable.of_iff (fun t => ?_)
    ((P₀.interEq_computable.comp hgL).and (P₁.interEq_computable.comp hgR))
  dsimp only
  simp only [unpair_pair_fst, unpair_pair_snd]
  rw [smashEnum_eq_eff hc₀le hc₁le hc₀ hc₁, smashEnum_eq_eff hc₀le hc₁le hc₀ hc₁,
    smashEnum_eq_eff hc₀le hc₁le hc₀ hc₁, prodNbhd_inter, prodNbhd_eq_iff]
cons_computable := by
  obtain ⟨f₀, hf₀p, hf₀e⟩ := proper₀_dec P₀
  obtain ⟨f₁, hf₁p, hf₁e⟩ := proper₁_dec P₁

  have hpa : RecDecidable (fun t => ¬(P₀.X t.unpair.1.unpair.1 = V₀.master
      ∧ P₁.X t.unpair.1.unpair.2 = V₁.master)) := by
    have h0 : RecDecidable (fun t => P₀.X t.unpair.1.unpair.1 = V₀.master) :=
      (proper₀_dec P₀).comp (Nat.Primrec.left.comp Nat.Primrec.left)
    have h1 : RecDecidable (fun t => P₁.X t.unpair.1.unpair.2 = V₁.master) :=
      (proper₁_dec P₁).comp (Nat.Primrec.right.comp Nat.Primrec.left)
    exact (h0.and h1).not
  have hpb : RecDecidable (fun t => ¬(P₀.X t.unpair.2.unpair.1 = V₀.master
      ∧ P₁.X t.unpair.2.unpair.2 = V₁.master)) := by
    have h0 : RecDecidable (fun t => P₀.X t.unpair.2.unpair.1 = V₀.master) :=
      (proper₀_dec P₀).comp (Nat.Primrec.left.comp Nat.Primrec.right)
    have h1 : RecDecidable (fun t => P₁.X t.unpair.2.unpair.2 = V₁.master) :=
      (proper₁_dec P₁).comp (Nat.Primrec.right.comp Nat.Primrec.right)
    exact (h0.and h1).not
  have hcons0 : RecDecidable (fun t => ∃ k, P₀.X k ⊆ P₀.X t.unpair.1.unpair.1
      ∩ P₀.X t.unpair.2.unpair.1) := by
    refine RecDecidable.of_iff (fun t => ?_) (P₀.cons_computable.comp
      ((Nat.Primrec.left.comp Nat.Primrec.left).pair (Nat.Primrec.left.comp Nat.
  Primrec.right)))
    simp only [unpair_pair_fst, unpair_pair_snd]
  have hcons1 : RecDecidable (fun t => ∃ k, P₁.X k ⊆ P₁.X t.unpair.1.unpair.2
      ∩ P₁.X t.unpair.2.unpair.2) := by
    refine RecDecidable.of_iff (fun t => ?_) (P₁.cons_computable.comp
      ((Nat.Primrec.right.comp Nat.Primrec.left).pair (Nat.Primrec.right.comp Nat.
  Primrec.right)))
    simp only [unpair_pair_fst, unpair_pair_snd]
  refine RecDecidable.of_iff (fun t => ?_) (hpa.or (hpb.or (hcons0.and hcons1)))
  constructor
  · rintro ⟨k, hk⟩
    by_cases hpa' : P₀.X t.unpair.1.unpair.1 = V₀.master ∧ P₁.X t.unpair.1.unpair.2 =
   V₁.master
    · by_cases hpb' : P₀.X t.unpair.2.unpair.1 = V₀.master ∧ P₁.X t.unpair.2.unpair.2
  = V₁.master
      · refine Or.inr (Or.inr ⟨?_, ?_⟩)
        · rw [smashEnum_proper hpa', smashEnum_proper hpb', prodNbhd_inter] at hk
          obtain ⟨A, B, hA, _, hkeq⟩ := smashEnum_eq_prodNbhd_mem (P₀ := P₀) (P₁ := P₁
  ) k
          rw [hkeq] at hk
          obtain ⟨hAsub, _⟩ := prodNbhd_subset_iff.mp hk
          obtain ⟨j₀, hj₀⟩ := P₀.surj hA
          exact ⟨j₀, by rw [hj₀]; exact hAsub⟩
        · rw [smashEnum_proper hpa', smashEnum_proper hpb', prodNbhd_inter] at hk
          obtain ⟨A, B, _, hB, hkeq⟩ := smashEnum_eq_prodNbhd_mem (P₀ := P₀) (P₁ := P₁
  ) k
          rw [hkeq] at hk
```

```
            obtain ⟨_, hBsub⟩ := prodNbhd_subset_iff.mp hk
            obtain ⟨j₁, hj₁⟩ := P₁.surj hB
            exact ⟨j₁, by rw [hj₁]; exact hBsub⟩
        · exact Or.inr (Or.inl hpb')
      · exact Or.inl hpa'
    · intro hp
      by_cases hpa' : P₀.X t.unpair.1.unpair.1 = V₀.master ∧ P₁.X t.unpair.1.unpair.2 =
     V₁.master
      · by_cases hpb' : P₀.X t.unpair.2.unpair.1 = V₀.master ∧ P₁.X t.unpair.2.unpair.2
    = V₁.master
        · rcases hp with h | h | ⟨⟨j₀, hj₀⟩, ⟨j₁, hj₁⟩⟩
          · exact absurd hpa' h
          · exact absurd hpb' h
          · have hXint : V₀.mem (P₀.X t.unpair.1.unpair.1 ∩ P₀.X t.unpair.2.unpair.1) :=
              V₀.inter_mem (P₀.mem_X _) (P₀.mem_X _) (P₀.mem_X j₀) hj₀
            have hYint : V₁.mem (P₁.X t.unpair.1.unpair.2 ∩ P₁.X t.unpair.2.unpair.2)
    :=
              V₁.inter_mem (P₁.mem_X _) (P₁.mem_X _) (P₁.mem_X j₁) hj₁
            have hXne : P₀.X t.unpair.1.unpair.1 ∩ P₀.X t.unpair.2.unpair.1 = V₀.master
     :=
              inter_ne_master_left (P₀.mem_X _) hpa'.1
            have hYne : P₁.X t.unpair.1.unpair.2 ∩ P₁.X t.unpair.2.unpair.2 = V₁.master
     :=
              inter_ne_master_left (P₁.mem_X _) hpa'.2
            obtain ⟨p₀, hp₀⟩ := P₀.surj hXint
            obtain ⟨p₁, hp₁⟩ := P₁.surj hYint
            refine ⟨Nat.pair p₀ p₁, ?_⟩
            rw [smashEnum_proper (by
                  rw [unpair_pair_fst, unpair_pair_snd, hp₀, hp₁]; exact ⟨hXne, hYne⟩),
              unpair_pair_fst, unpair_pair_snd, hp₀, hp₁, smashEnum_proper hpa',
              smashEnum_proper hpb', prodNbhd_inter]
        · refine ⟨t.unpair.1, ?_⟩
          rw [smashEnum_master (t := t.unpair.2) hpb',
            Set.inter_eq_left.mpr (smashEnum_subset_master t.unpair.1)]
      · refine ⟨t.unpair.2, ?_⟩
        rw [smashEnum_master (t := t.unpair.1) hpa',
          Set.inter_eq_right.mpr (smashEnum_subset_master t.unpair.2)]

@[simp] theorem smashPresentation_X (t : ℕ) :
    (smashPresentation P₀ P₁).X t = smashEnum P₀ P₁ t := rfl

def smashProj₀ (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    ApproximableMap (smash V₀ V₁) V₀ where
  rel W X' := (smash V₀ V₁).mem W ∧ V₀.mem X' ∧ Sum.inl ^-1' W ⊆ X'
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(smash V₀ V₁).master_mem, V₀.master_mem, by simp⟩
  inter_right := by
    rintro W X' X'' ⟨hW, hX', hsub⟩ ⟨-, hX'', hsub'⟩
    obtain ⟨A, B, hA, _, rfl⟩ := smash_mem_prodNbhd_form hW
    rw [inl_preimage_prodNbhd] at hsub hsub' ⊢
    exact ⟨hW, V₀.inter_mem hX' hX'' hA (Set.subset_inter hsub hsub'), Set.subset_inter
     hsub hsub'⟩
  mono := by
    rintro W W₂ X' X₂' ⟨_, _, hsub⟩ hW₂W hX'X₂' hW₂ hX₂'
    exact ⟨hW₂, hX₂', ((Set.preimage_mono hW₂W).trans hsub).trans hX'X₂'⟩
```

```
@[simp] theorem smashProj₀_rel {W : Set (α ? β)} {X' : Set α} :
    (smashProj₀ V₀ V₁).rel W X' ↔ (smash V₀ V₁).mem W ∧ V₀.mem X' ∧ Sum.inl ^-1' W ⊆ X'
    := Iff.rfl

def smashProj₁ (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β) :
    ApproximableMap (smash V₀ V₁) V₁ where
  rel W Y' := (smash V₀ V₁).mem W ∧ V₁.mem Y' ∧ Sum.inr ^-1' W ⊆ Y'
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(smash V₀ V₁).master_mem, V₁.master_mem, by simp⟩
  inter_right := by
    rintro W Y' Y'' ⟨hW, hY', hsub⟩ ⟨-, hY'', hsub'⟩
    obtain ⟨A, B, _, hB, rfl⟩ := smash_mem_prodNbhd_form hW
    rw [inr_preimage_prodNbhd] at hsub hsub' ⊢
    exact ⟨hW, V₁.inter_mem hY' hY'' hB (Set.subset_inter hsub hsub'), Set.subset_inter
     hsub hsub'⟩
  mono := by
    rintro W W₂ Y' Y₂' ⟨_, _, hsub⟩ hW₂W hY'Y₂' hW₂ hY₂'
    exact ⟨hW₂, hY₂', ((Set.preimage_mono hW₂W).trans hsub).trans hY'Y₂'⟩

@[simp] theorem smashProj₁_rel {W : Set (α ? β)} {Y' : Set β} :
    (smashProj₁ V₀ V₁).rel W Y' ↔ (smash V₀ V₁).mem W ∧ V₁.mem Y' ∧ Sum.inr ^-1' W ⊆ Y'
    := Iff.rfl

def smashPaired {V₂ : NeighborhoodSystem ?} (a : ApproximableMap V₂ V₀)
    (b : ApproximableMap V₂ V₁) : ApproximableMap V₂ (smash V₀ V₁) where
  rel Z W := V₂.mem Z ∧ (smash V₀ V₁).mem W ∧
    (W = prodNbhd V₀.master V₁.master ∨
      ∃ A B, W = prodNbhd A B ∧ A = V₀.master ∧ B = V₁.master ∧ a.rel Z A ∧ b.rel Z B)
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨V₂.master_mem, (smash V₀ V₁).master_mem, Or.inl rfl⟩
  inter_right := by
    rintro Z W₁ W₂ ⟨hZ, hW₁, hd₁⟩ ⟨-, hW₂, hd₂⟩
    have key : W₁ ∩ W₂ = prodNbhd V₀.master V₁.master ∨
        ∃ A B, W₁ ∩ W₂ = prodNbhd A B ∧ A = V₀.master ∧ B = V₁.master ∧
          a.rel Z A ∧ b.rel Z B := by
      rcases hd₁ with rfl | ⟨A₁, B₁, rfl, hA₁, hB₁, ha₁, hb₁⟩
      · rw [Set.inter_eq_right.mpr (show W₂ ⊆ prodNbhd V₀.master V₁.master from
          (smash V₀ V₁).sub_master hW₂)]
        exact hd₂
      · rcases hd₂ with rfl | ⟨A₂, B₂, rfl, hA₂, hB₂, ha₂, hb₂⟩
        · rw [Set.inter_eq_left.mpr (show prodNbhd A₁ B₁ ⊆ prodNbhd V₀.master V₁.master
    from
            (smash V₀ V₁).sub_master hW₁)]
          exact Or.inr ⟨A₁, B₁, rfl, hA₁, hB₁, ha₁, hb₁⟩
        · rw [prodNbhd_inter]
          exact Or.inr ⟨A₁ ∩ A₂, B₁ ∩ B₂, rfl,
            inter_ne_master_left (a.rel_cod ha₁) hA₁,
            inter_ne_master_left (b.rel_cod hb₁) hB₁,
            a.inter_right ha₁ ha₂, b.inter_right hb₁ hb₂⟩
    refine ⟨hZ, ?_, key⟩
    rcases key with hm | ⟨A, B, hWW, hA, hB, ha, hb⟩
    · rw [hm]; exact (smash V₀ V₁).master_mem
    · rw [hWW]; exact smash_mem_proper (a.rel_cod ha) hA (b.rel_cod hb) hB
```

```
  mono := by
    rintro Z Z₂ W W₂ ⟨_, _, hd⟩ hZ₂Z hWW₂ hZ₂mem hW₂mem
    refine ⟨hZ₂mem, hW₂mem, ?_⟩
    rcases hd with rfl | ⟨A, B, rfl, hA, hB, ha, hb⟩
    · left; exact Set.Subset.antisymm ((smash V₀ V₁).sub_master hW₂mem) hWW₂
    · rcases smash_mem_iff.mp hW₂mem with rfl | ⟨A₂, B₂, hA₂, hA₂ne, hB₂, hB₂ne, rfl⟩
      · left; rfl
      · obtain ⟨hAA₂, hBB₂⟩ := prodNbhd_subset_iff.mp hWW₂
        exact Or.inr ⟨A₂, B₂, rfl, hA₂ne, hB₂ne,
          a.mono ha hZ₂Z hAA₂ hZ₂mem hA₂, b.mono hb hZ₂Z hBB₂ hZ₂mem hB₂⟩

@[simp] theorem smashPaired_rel {V₂ : NeighborhoodSystem ?} {a : ApproximableMap V₂ V₀}
    {b : ApproximableMap V₂ V₁} {Z : Set ?} {W : Set (α ? β)} :
    (smashPaired a b).rel Z W ↔ V₂.mem Z ∧ (smash V₀ V₁).mem W ∧
      (W = prodNbhd V₀.master V₁.master ∨
        ∃ A B, W = prodNbhd A B ∧ A = V₀.master ∧ B = V₁.master ∧ a.rel Z A ∧ b.rel Z
    B) :=
  Iff.rfl

end Smash

section Coalesced

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty)

def osum : NeighborhoodSystem (Option (α ? β)) where
  mem W := W = sumMaster V₀ V₁ ∨ (∃ X, V₀.mem X ∧ X = V₀.master ∧ W = inj₀ X) ∨
    (∃ Y, V₁.mem Y ∧ Y = V₁.master ∧ W = inj₁ Y)
  master := sumMaster V₀ V₁
  master_nonempty := ⟨none, none_mem_sumMaster⟩
  master_mem := Or.inl rfl
  sub_master := by
    rintro W (rfl | ⟨X, hX, -, rfl⟩ | ⟨Y, hY, -, rfl⟩)
    · exact subset_rfl
    · exact inj₀_subset_sumMaster hX
    · exact inj₁_subset_sumMaster hY
  inter_mem := by
    have hne : ∀ W, (W = sumMaster V₀ V₁ ∨ (∃ X, V₀.mem X ∧ X = V₀.master ∧ W = inj₀ X)
    ∨
        (∃ Y, V₁.mem Y ∧ Y = V₁.master ∧ W = inj₁ Y)) → (W : Set (Option (α ? β))).
    Nonempty := by
      rintro W (rfl | ⟨X, hX, -, rfl⟩ | ⟨Y, hY, -, rfl⟩)
      · exact ⟨none, none_mem_sumMaster⟩
      · exact inj₀_nonempty (h₀ X hX)
      · exact inj₁_nonempty (h₁ Y hY)
    rintro W W' Z hW hW' hZ hZsub
    rcases hW with rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩
    · rcases hW' with rfl | ⟨X', hX', hX'ne, rfl⟩ | ⟨Y', hY', hY'ne, rfl⟩
      · rw [Set.inter_self]; exact Or.inl rfl
      · rw [sumMaster_inter_inj₀ hX']; exact Or.inr (Or.inl ⟨X', hX', hX'ne, rfl⟩)
      · rw [sumMaster_inter_inj₁ hY']; exact Or.inr (Or.inr ⟨Y', hY', hY'ne, rfl⟩)
    · rcases hW' with rfl | ⟨X', hX', hX'ne, rfl⟩ | ⟨Y', hY', hY'ne, rfl⟩
      · rw [Set.inter_comm, sumMaster_inter_inj₀ hX]; exact Or.inr (Or.inl ⟨X, hX, hXne,
    rfl⟩)
      · rw [inj₀_inter] at hZsub ⊢
```

```
        rcases hZ with rfl | ⟨Z₀, hZ₀, -, rfl⟩ | ⟨Z₁, hZ₁, -, rfl⟩
        · exact absurd (hZsub none_mem_sumMaster) none_mem_inj₀
        · exact Or.inr (Or.inl ⟨X ∩ X', V₀.inter_mem hX hX' hZ₀ (inj₀_subset_inj₀.mp
    hZsub),
            inter_ne_master_left hX hXne, rfl⟩)
        · obtain ⟨b, hb⟩ := h₁ Z₁ hZ₁
          exact absurd (hZsub (ir_mem_inj₁.mpr hb)) ir_mem_inj₀
      · rw [inj₀_inter_inj₁] at hZsub
        obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
    · rcases hW' with rfl | ⟨X', hX', hX'ne, rfl⟩ | ⟨Y', hY', hY'ne, rfl⟩
      · rw [Set.inter_comm, sumMaster_inter_inj₁ hY]; exact Or.inr (Or.inr ⟨Y, hY, hYne,
     rfl⟩)
      · rw [Set.inter_comm, inj₀_inter_inj₁] at hZsub
        obtain ⟨t, ht⟩ := hne Z hZ; exact absurd (hZsub ht) (Set.notMem_empty t)
      · rw [inj₁_inter] at hZsub ⊢
        rcases hZ with rfl | ⟨Z₀, hZ₀, -, rfl⟩ | ⟨Z₁, hZ₁, -, rfl⟩
        · exact absurd (hZsub none_mem_sumMaster) none_mem_inj₁
        · obtain ⟨a, ha⟩ := h₀ Z₀ hZ₀
          exact absurd (hZsub (il_mem_inj₀.mpr ha)) il_mem_inj₁
        · exact Or.inr (Or.inr ⟨Y ∩ Y', V₁.inter_mem hY hY' hZ₁ (inj₁_subset_inj₁.mp
    hZsub),
            inter_ne_master_right hY hYne, rfl⟩)

@[simp] theorem osum_master : (osum h₀ h₁).master = sumMaster V₀ V₁ := rfl

end Coalesced

section Coalesced

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty)

variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

open scoped Classical in

noncomputable def osumEnum (t : ℕ) : Set (Option (α ? β)) :=
  if t.unpair.1 = 0 ∧ P₀.X t.unpair.2 = V₀.master then inj₀ (P₀.X t.unpair.2)
  else if t.unpair.1 = 1 ∧ P₁.X t.unpair.2 = V₁.master then inj₁ (P₁.X t.unpair.2)
  else sumMaster V₀ V₁

end Coalesced

section Coalesced

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty)

variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

variable {P₀ P₁}

open scoped Classical in
theorem osumEnum_left {t : ℕ} (h : t.unpair.1 = 0 ∧ P₀.X t.unpair.2 = V₀.master) :
    osumEnum P₀ P₁ t = inj₀ (P₀.X t.unpair.2) := ite_eq_left h
```

```
open scoped Classical in
theorem osumEnum_master {t : ℕ}
    (h0 : ¬(t.unpair.1 = 0 ∧ P₀.X t.unpair.2 = V₀.master))
    (h1 : ¬(t.unpair.1 = 1 ∧ P₁.X t.unpair.2 = V₁.master)) :
    osumEnum P₀ P₁ t = sumMaster V₀ V₁ := by
  unfold osumEnum; rw [ite_eq_right h0, ite_eq_right h1]

open scoped Classical in
theorem osumEnum_right {t : ℕ} (h : t.unpair.1 = 1 ∧ P₁.X t.unpair.2 = V₁.master) :
    osumEnum P₀ P₁ t = inj₁ (P₁.X t.unpair.2) := by
  have h0 : ¬(t.unpair.1 = 0 ∧ P₀.X t.unpair.2 = V₀.master) := by
    rintro ⟨hc, -⟩; obtain ⟨h1, -⟩ := h; omega
  unfold osumEnum; rw [ite_eq_right h0, ite_eq_left h]

theorem osumEnum_mem (t : ℕ) : (osum h₀ h₁).mem (osumEnum P₀ P₁ t) := by
  by_cases hL : t.unpair.1 = 0 ∧ P₀.X t.unpair.2 = V₀.master
  · rw [osumEnum_left hL]; exact Or.inr (Or.inl ⟨_, P₀.mem_X _, hL.2, rfl⟩)
  · by_cases hR : t.unpair.1 = 1 ∧ P₁.X t.unpair.2 = V₁.master
    · rw [osumEnum_right hR]; exact Or.inr (Or.inr ⟨_, P₁.mem_X _, hR.2, rfl⟩)
    · rw [osumEnum_master hL hR]; exact Or.inl rfl

include h₀ h₁ in
theorem osumEnum_nonempty (t : ℕ) : (osumEnum P₀ P₁ t).Nonempty := by
  by_cases hL : t.unpair.1 = 0 ∧ P₀.X t.unpair.2 = V₀.master
  · rw [osumEnum_left hL]; exact inj₀_nonempty (h₀ _ (P₀.mem_X _))
  · by_cases hR : t.unpair.1 = 1 ∧ P₁.X t.unpair.2 = V₁.master
    · rw [osumEnum_right hR]; exact inj₁_nonempty (h₁ _ (P₁.mem_X _))
    · rw [osumEnum_master hL hR]; exact ⟨none, none_mem_sumMaster⟩

include h₀ h₁ in
theorem osumEnum_subset_master (t : ℕ) : osumEnum P₀ P₁ t ⊆ sumMaster V₀ V₁ :=
  (osum h₀ h₁).sub_master (osumEnum_mem h₀ h₁ t)

end Coalesced

section Coalesced

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty)

variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

variable {P₀ P₁}

variable {h₀ h₁}

def osumOutMap₀ : ApproximableMap (osum h₀ h₁) V₀ where
  rel W X := (osum h₀ h₁).mem W ∧ V₀.mem X ∧ leftPart V₀ W ⊆ X
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(osum h₀ h₁).master_mem, V₀.master_mem, (leftPart_sumMaster V₀ V₁).
    subset⟩
  inter_right := by
    rintro W X X' ⟨hW, hX, hsub⟩ ⟨-, hX', hsub'⟩
    refine ⟨hW, V₀.inter_mem hX hX' ?_ (Set.subset_inter hsub hsub'), Set.subset_inter
    hsub hsub'⟩
```

```
    rcases hW with rfl | ⟨A, hA, -, rfl⟩ | ⟨B, hB, -, rfl⟩
    · rw [leftPart_sumMaster]; exact V₀.master_mem
    · rw [leftPart_inj₀]; exact hA
    · rw [leftPart_inj₁ V₀ (h₁ B hB)]; exact V₀.master_mem
  mono := by
    rintro W W' X X' ⟨_, _, hsub⟩ hW'W hXX' hW' hX'
    exact ⟨hW', hX', (leftPart_mono V₀ hW'W).trans (hsub.trans hXX')⟩

def osumOutMap₁ : ApproximableMap (osum h₀ h₁) V₁ where
  rel W Y := (osum h₀ h₁).mem W ∧ V₁.mem Y ∧ rightPart V₁ W ⊆ Y
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(osum h₀ h₁).master_mem, V₁.master_mem, (rightPart_sumMaster V₀ V₁).
    subset⟩


  inter_right := by
    rintro W Y Y' ⟨hW, hY, hsub⟩ ⟨-, hY', hsub'⟩
    refine ⟨hW, V₁.inter_mem hY hY' ?_ (Set.subset_inter hsub hsub'), Set.subset_inter
    hsub hsub'⟩
    rcases hW with rfl | ⟨A, hA, -, rfl⟩ | ⟨B, hB, -, rfl⟩
    · rw [rightPart_sumMaster]; exact V₁.master_mem
    · rw [rightPart_inj₀ V₁ (h₀ A hA)]; exact V₁.master_mem
    · rw [rightPart_inj₁]; exact hB
  mono := by
    rintro W W' Y Y' ⟨_, _, hsub⟩ hW'W hYY' hW' hY'
    exact ⟨hW', hY', (rightPart_mono V₁ hW'W).trans (hsub.trans hYY')⟩

end Coalesced

section Coalesced

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty)

variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

variable {P₀ P₁}

noncomputable def osumPresentation : ScottPresentation (osum h₀ h₁) where
  X := osumEnum P₀ P₁
  mem_X := osumEnum_mem h₀ h₁
  surj := by
    rintro W (rfl | ⟨X, hX, hXne, rfl⟩ | ⟨Y, hY, hYne, rfl⟩)
    · refine ⟨Nat.pair 2 0, ?_⟩
      rw [osumEnum_master (by rw [unpair_pair_fst]; rintro ⟨h, -⟩; omega)
        (by rw [unpair_pair_fst]; rintro ⟨h, -⟩; omega)]
    · obtain ⟨n, rfl⟩ := P₀.surj hX
      refine ⟨Nat.pair 0 n, ?_⟩
      rw [osumEnum_left (by rw [unpair_pair_fst, unpair_pair_snd]; exact ⟨rfl, hXne⟩),
        unpair_pair_snd]
    · obtain ⟨n, rfl⟩ := P₁.surj hY
      refine ⟨Nat.pair 1 n, ?_⟩
      rw [osumEnum_right (by rw [unpair_pair_fst, unpair_pair_snd]; exact ⟨rfl, hYne⟩),
        unpair_pair_snd]
  interEq_computable := by
    obtain ⟨f₀, hf₀p, hf₀e⟩ := proper₀_dec P₀
```

```
obtain ⟨f₁, hf₁p, hf₁e⟩ := proper₁_dec P₁
have hc₀1 : ∀ n, isOne (f₀ n) = 1 ↔ P₀.X n = V₀.master := fun n => by
  rw [isOne_eq_one_iff]; exact (hf₀e n).symm
have hc₁1 : ∀ n, isOne (f₁ n) = 1 ↔ P₁.X n = V₁.master := fun n => by
  rw [isOne_eq_one_iff]; exact (hf₁e n).symm
classical
set r : ℕ → ℕ := fun t =>
  if t.unpair.1 = 0 ∧ P₀.X t.unpair.2 = V₀.master then Nat.pair 0 t.unpair.2
  else if t.unpair.1 = 1 ∧ P₁.X t.unpair.2 = V₁.master then Nat.pair 1 t.unpair.2
  else Nat.pair 2 0 with hrdef
have hr_left : ∀ t, (t.unpair.1 = 0 ∧ P₀.X t.unpair.2 = V₀.master) →
    r t = Nat.pair 0 t.unpair.2 := fun t h => by simp only [hrdef]; exact
ite_eq_left h
have hr_right : ∀ t, ¬(t.unpair.1 = 0 ∧ P₀.X t.unpair.2 = V₀.master) →
    (t.unpair.1 = 1 ∧ P₁.X t.unpair.2 = V₁.master) → r t = Nat.pair 1 t.unpair.2
:=
  fun t h0 h1 => by simp only [hrdef]; rw [ite_eq_right h0, ite_eq_left h1]
have hr_master : ∀ t, ¬(t.unpair.1 = 0 ∧ P₀.X t.unpair.2 = V₀.master) →
    ¬(t.unpair.1 = 1 ∧ P₁.X t.unpair.2 = V₁.master) → r t = Nat.pair 2 0 :=
  fun t h0 h1 => by simp only [hrdef]; rw [ite_eq_right h0, ite_eq_right h1]
have hval : ∀ t, osumEnum P₀ P₁ t = sumEnum P₀ P₁ (r t) := by
  intro t
  by_cases hL : t.unpair.1 = 0 ∧ P₀.X t.unpair.2 = V₀.master
  · rw [osumEnum_left hL, hr_left t hL, sumEnum_zero (by rw [unpair_pair_fst]),
      unpair_pair_snd]
  · by_cases hR : t.unpair.1 = 1 ∧ P₁.X t.unpair.2 = V₁.master
    · rw [osumEnum_right hR, hr_right t hL hR, sumEnum_one (by rw [unpair_pair_fst
]),
        unpair_pair_snd]
    · rw [osumEnum_master hL hR, hr_master t hL hR,
        sumEnum_master (by rw [unpair_pair_fst]; decide) (by rw [unpair_pair_fst];
 decide)]
have hbit0 : ∀ v, isOne v = if v = 1 then 1 else 0 := fun v => by
  by_cases h : v = 1
  · rw [ite_eq_left h, h]; rfl
  · rw [ite_eq_right h]; have h1 := isOne_le_one v; have h2 := isOne_eq_one_iff v;
omega
have hrp : Nat.Primrec r := by
  have hchr1 : Nat.Primrec (fun t : ℕ => (1 - t.unpair.1) * isOne (f₀ t.unpair.2))
:=
    primrec_mul₂ (primrec_sub₂ (Nat.Primrec.const 1) Nat.Primrec.left)
      (primrec_isOne.comp (hf₀p.comp Nat.Primrec.right))
  have hchr2 : Nat.Primrec (fun t : ℕ => isOne t.unpair.1 * isOne (f₁ t.unpair.2))
:=
    primrec_mul₂ (primrec_isOne.comp Nat.Primrec.left)
      (primrec_isOne.comp (hf₁p.comp Nat.Primrec.right))
  have hA : Nat.Primrec (fun t : ℕ => Nat.pair 0 t.unpair.2) :=
    (Nat.Primrec.const 0).pair Nat.Primrec.right
  have hB : Nat.Primrec (fun t : ℕ => Nat.pair 1 t.unpair.2) :=
    (Nat.Primrec.const 1).pair Nat.Primrec.right
  have hC : Nat.Primrec (fun _ : ℕ => Nat.pair 2 0) := Nat.Primrec.const _
  have hchr1eq : ∀ t : ℕ, (1 - t.unpair.1) * isOne (f₀ t.unpair.2)
      = if (t.unpair.1 = 0 ∧ P₀.X t.unpair.2 = V₀.master) then 1 else 0 := by
    intro t
    by_cases hc : t.unpair.1 = 0 ∧ P₀.X t.unpair.2 = V₀.master
    · rw [ite_eq_left hc]
```

```
        have ht0 := hc.1
        have e1 : 1 - t.unpair.1 = 1 := by omega
        rw [e1, (hc₀1 _).mpr hc.2]
      · rw [ite_eq_right hc]
        rcases not_and_or.mp hc with h | h
        · have e1 : 1 - t.unpair.1 = 0 := by omega
          rw [e1, Nat.zero_mul]
        · have e2 : isOne (f₀ t.unpair.2) = 0 := by
            have hle := isOne_le_one (f₀ t.unpair.2)
            by_contra h0; exact h ((hc₀1 _).mp (by omega))
          rw [e2, Nat.mul_zero]
    have hchr2eq : ∀ t : ℕ, isOne t.unpair.1 * isOne (f₁ t.unpair.2)
        = if (t.unpair.1 = 1 ∧ P₁.X t.unpair.2 = V₁.master) then 1 else 0 := by
      intro t
      by_cases hc : t.unpair.1 = 1 ∧ P₁.X t.unpair.2 = V₁.master
      · rw [ite_eq_left hc, (by rw [isOne_eq_one_iff]; exact hc.1 : isOne t.unpair.1
  = 1),
          (hc₁1 _).mpr hc.2]
      · rw [ite_eq_right hc]
        rcases not_and_or.mp hc with h | h
        · have e1 : isOne t.unpair.1 = 0 := by rw [hbit0]; exact ite_eq_right h
          rw [e1, Nat.zero_mul]
        · have e2 : isOne (f₁ t.unpair.2) = 0 := by
            have hle := isOne_le_one (f₁ t.unpair.2)
            by_contra h0; exact h ((hc₁1 _).mp (by omega))
          rw [e2, Nat.mul_zero]
    refine (primrec_selectFn hchr1 hA (primrec_selectFn hchr2 hB hC)).of_eq (fun t
  => ?_)
    simp only [hchr1eq, hchr2eq, selectFn_ite, hrdef]
  have hg : Nat.Primrec (fun t => Nat.pair (r t.unpair.1)
      (Nat.pair (r t.unpair.2.unpair.1) (r t.unpair.2.unpair.2))) :=
    (hrp.comp Nat.Primrec.left).pair
      ((hrp.comp (Nat.Primrec.left.comp Nat.Primrec.right)).pair
        (hrp.comp (Nat.Primrec.right.comp Nat.Primrec.right)))
  refine RecDecidable.of_iff (fun t => ?_)
    ((sumPresentation (h₀ := h₀) (h₁ := h₁) P₀ P₁).interEq_computable.comp hg)
  have hXeq : ∀ x, (sumPresentation (h₀ := h₀) (h₁ := h₁) P₀ P₁).X x = sumEnum P₀ P₁ x
   :=
    fun _ => rfl
  simp only [unpair_pair_fst, unpair_pair_snd, hXeq]
  rw [hval t.unpair.1, hval t.unpair.2.unpair.1, hval t.unpair.2.unpair.2]
cons_computable := by
  have hLa : RecDecidable (fun t => t.unpair.1.unpair.1 = 0
      ∧ P₀.X t.unpair.1.unpair.2 = V₀.master) :=
    (RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const
  0)).and
      ((proper₀_dec P₀).comp (Nat.Primrec.right.comp Nat.Primrec.left))
  have hRa : RecDecidable (fun t => t.unpair.1.unpair.1 = 1
      ∧ P₁.X t.unpair.1.unpair.2 = V₁.master) :=
    (RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const
  1)).and
      ((proper₁_dec P₁).comp (Nat.Primrec.right.comp Nat.Primrec.left))
  have hLb : RecDecidable (fun t => t.unpair.2.unpair.1 = 0
      ∧ P₀.X t.unpair.2.unpair.2 = V₀.master) :=
    (RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const
   0)).and
```

```
    ((proper₀_dec P₀).comp (Nat.Primrec.right.comp Nat.Primrec.right))
have hRb : RecDecidable (fun t => t.unpair.2.unpair.1 = 1
    ∧ P₁.X t.unpair.2.unpair.2 = V₁.master) :=
  (RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const
 1)).and
    ((proper₁_dec P₁).comp (Nat.Primrec.right.comp Nat.Primrec.right))
have hMca : RecDecidable (fun t => ¬(t.unpair.1.unpair.1 = 0
    ∧ P₀.X t.unpair.1.unpair.2 = V₀.master)
    ∧ ¬(t.unpair.1.unpair.1 = 1 ∧ P₁.X t.unpair.1.unpair.2 = V₁.master)) := hLa.not
.and hRa.not
have hMcb : RecDecidable (fun t => ¬(t.unpair.2.unpair.1 = 0
    ∧ P₀.X t.unpair.2.unpair.2 = V₀.master)
    ∧ ¬(t.unpair.2.unpair.1 = 1 ∧ P₁.X t.unpair.2.unpair.2 = V₁.master)) := hLb.not
.and hRb.not
have hcons0 : RecDecidable (fun t => ∃ k, P₀.X k ⊆ P₀.X t.unpair.1.unpair.2
    ∩ P₀.X t.unpair.2.unpair.2) := by
  refine RecDecidable.of_iff (fun t => ?_) (P₀.cons_computable.comp
    ((Nat.Primrec.right.comp Nat.Primrec.left).pair (Nat.Primrec.right.comp Nat.
Primrec.right)))
  simp only [unpair_pair_fst, unpair_pair_snd]
have hcons1 : RecDecidable (fun t => ∃ k, P₁.X k ⊆ P₁.X t.unpair.1.unpair.2
    ∩ P₁.X t.unpair.2.unpair.2) := by
  refine RecDecidable.of_iff (fun t => ?_) (P₁.cons_computable.comp
    ((Nat.Primrec.right.comp Nat.Primrec.left).pair (Nat.Primrec.right.comp Nat.
Primrec.right)))
  simp only [unpair_pair_fst, unpair_pair_snd]
refine RecDecidable.of_iff (fun t => ?_)
  (hMca.or (hMcb.or ((hLa.and (hLb.and hcons0)).or (hRa.and (hRb.and hcons1)))))
constructor
· rintro ⟨k, hk⟩
  by_cases hLa' : t.unpair.1.unpair.1 = 0 ∧ P₀.X t.unpair.1.unpair.2 = V₀.master
  · by_cases hLb' : t.unpair.2.unpair.1 = 0 ∧ P₀.X t.unpair.2.unpair.2 = V₀.master
    · rw [osumEnum_left hLa', osumEnum_left hLb', inj₀_inter] at hk
      refine Or.inr (Or.inr (Or.inl ⟨hLa', hLb', ?_⟩))
      rcases osumEnum_mem h₀ h₁ k with hkm | ⟨Xk, hXk, -, hkeq⟩ | ⟨Yk, hYk, -, hkeq⟩
      · exact absurd (hk (hkm ▶ none_mem_sumMaster)) none_mem_inj₀
      · rw [hkeq, inj₀_subset_inj₀] at hk
        obtain ⟨j, hj⟩ := P₀.surj hXk
        exact ⟨j, by rw [hj]; exact hk⟩
      · rw [hkeq] at hk
        obtain ⟨y0, hy0⟩ := h₁ Yk hYk
        exact absurd (hk (ir_mem_inj₁.mpr hy0)) ir_mem_inj₀
    · by_cases hRb' : t.unpair.2.unpair.1 = 1 ∧ P₁.X t.unpair.2.unpair.2 = V₁.
master
      · rw [osumEnum_left hLa', osumEnum_right hRb', inj₀_inter_inj₁] at hk
        obtain ⟨m, hm⟩ := osumEnum_nonempty h₀ h₁ k
        exact absurd (hk hm) (Set.notMem_empty m)
      · exact Or.inr (Or.inl ⟨hLb', hRb'⟩)
  · by_cases hRa' : t.unpair.1.unpair.1 = 1 ∧ P₁.X t.unpair.1.unpair.2 = V₁.master
    · by_cases hRb' : t.unpair.2.unpair.1 = 1 ∧ P₁.X t.unpair.2.unpair.2 = V₁.
master
      · rw [osumEnum_right hRa', osumEnum_right hRb', inj₁_inter] at hk
        refine Or.inr (Or.inr (Or.inr ⟨hRa', hRb', ?_⟩))
        rcases osumEnum_mem h₀ h₁ k with hkm | ⟨Xk, hXk, -, hkeq⟩ | ⟨Yk, hYk, -,
hkeq⟩
        · exact absurd (hk (hkm ▶ none_mem_sumMaster)) none_mem_inj₁
```

```
          · rw [hkeq] at hk
            obtain ⟨x0, hx0⟩ := h₀ Xk hXk
            exact absurd (hk (il_mem_inj₀.mpr hx0)) il_mem_inj₁
          · rw [hkeq, inj₁_subset_inj₁] at hk
            obtain ⟨j, hj⟩ := P₁.surj hYk
            exact ⟨j, by rw [hj]; exact hk⟩
        · by_cases hLb' : t.unpair.2.unpair.1 = 0 ∧ P₀.X t.unpair.2.unpair.2 = V₀.
    master
          · rw [osumEnum_right hRa', osumEnum_left hLb', Set.inter_comm,
              inj₀_inter_inj₁] at hk
            obtain ⟨m, hm⟩ := osumEnum_nonempty h₀ h₁ k
            exact absurd (hk hm) (Set.notMem_empty m)
          · exact Or.inr (Or.inl ⟨hLb', hRb'⟩)
      · exact Or.inl ⟨hLa', hRa'⟩
    · intro hp
      rcases hp with hMca' | hMcb' | ⟨hLa', hLb', hc0⟩ | ⟨hRa', hRb', hc1⟩
      · refine ⟨t.unpair.2, ?_⟩
        rw [osumEnum_master hMca'.1 hMca'.2]
        exact Set.subset_inter (osumEnum_subset_master h₀ h₁ t.unpair.2) subset_rfl
      · refine ⟨t.unpair.1, ?_⟩
        rw [osumEnum_master hMcb'.1 hMcb'.2]
        exact Set.subset_inter subset_rfl (osumEnum_subset_master h₀ h₁ t.unpair.1)
      · obtain ⟨j, hj⟩ := hc0
        have hRHSmem : V₀.mem (P₀.X t.unpair.1.unpair.2 ∩ P₀.X t.unpair.2.unpair.2) :=
          V₀.inter_mem (P₀.mem_X _) (P₀.mem_X _) (P₀.mem_X j) hj
        have hRHSne : P₀.X t.unpair.1.unpair.2 ∩ P₀.X t.unpair.2.unpair.2 = V₀.master
    :=
          inter_ne_master_left (P₀.mem_X _) hLa'.2
        have hjne : P₀.X j = V₀.master := fun he =>
          hRHSne (Set.Subset.antisymm (V₀.sub_master hRHSmem) (he ▸ hj))
        refine ⟨Nat.pair 0 j, ?_⟩
        rw [osumEnum_left (by rw [unpair_pair_fst, unpair_pair_snd]; exact ⟨rfl, hjne⟩)
    ,
          unpair_pair_snd, osumEnum_left hLa', osumEnum_left hLb', inj₀_inter, inj₀
    _subset_inj₀]
        exact hj
      · obtain ⟨j, hj⟩ := hc1
        have hRHSmem : V₁.mem (P₁.X t.unpair.1.unpair.2 ∩ P₁.X t.unpair.2.unpair.2) :=
          V₁.inter_mem (P₁.mem_X _) (P₁.mem_X _) (P₁.mem_X j) hj
        have hRHSne : P₁.X t.unpair.1.unpair.2 ∩ P₁.X t.unpair.2.unpair.2 = V₁.master
    :=
          inter_ne_master_right (P₁.mem_X _) hRa'.2
        have hjne : P₁.X j = V₁.master := fun he =>
          hRHSne (Set.Subset.antisymm (V₁.sub_master hRHSmem) (he ▸ hj))
        refine ⟨Nat.pair 1 j, ?_⟩
        rw [osumEnum_right (by rw [unpair_pair_fst, unpair_pair_snd]; exact ⟨rfl, hjne⟩
    ),
          unpair_pair_snd, osumEnum_right hRa', osumEnum_right hRb', inj₁_inter, inj₁
    _subset_inj₁]
        exact hj

end Coalesced

section Coalesced

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
```

```
  (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty)

variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

variable {P₀ P₁}

variable {h₀ h₁}

variable (P₀ P₁)

@[simp] theorem osumPresentation_X (t : ℕ) :
    (osumPresentation h₀ h₁ (P₀ := P₀) (P₁ := P₁)).X t = osumEnum P₀ P₁ t := rfl

end Coalesced

section Iterate

open Domain.Recursive

variable {V : NeighborhoodSystem α} (P : ComputablePresentation V)

def iterIdx (t j : ℕ) : ℕ := nthCode t j P.masterIdx

def iterEnum (t : ℕ) : Set (ℕ × α) := {p | p.2 ∈ P.X (iterIdx P t p.1)}

end Iterate

section Iterate

open Domain.Recursive

variable {V : NeighborhoodSystem α} (P : ComputablePresentation V)

variable {P}

@[simp] theorem fiber_iterEnum (t j : ℕ) : fiber (iterEnum P t) j = P.X (iterIdx P t j
    ) := rfl

theorem exists_list_fiber {W : Set (ℕ × α)} (hW : (iterSys V).mem W) :
    ∀ N, ∃ L : List ℕ, L.length = N ∧ ∀ j, j < N → P.X (L.getD j P.masterIdx) = fiber
    W j := by
  intro N
  induction N with
  | zero => exact ⟨[], rfl, fun j hj => absurd hj (Nat.not_lt_zero j)⟩
  | succ N ih =>
    obtain ⟨L, hlen, hL⟩ := ih
    obtain ⟨n, hn⟩ := P.surj (hW.1 N)
    refine ⟨L ++ [n], by simp [List.length_append, hlen], fun j hj => ?_⟩
    by_cases h : j < N
    · rw [getD_append_cf L [n] P.masterIdx (by rw [hlen]; exact h)]
      exact hL j h
    · have hjN : j = N := by omega
      subst hjN
      rw [getD_append_right_cf L [n] P.masterIdx hlen.le, hlen, Nat.sub_self,
        List.getD_cons_zero]
      exact hn
```

```
def interG (P : ComputablePresentation V) (s : ℕ) : ℕ :=
  P.inter (iterIdx P s.unpair.2.unpair.1 s.unpair.1) (iterIdx P s.unpair.2.unpair.2 s.
    unpair.1)

theorem iterIdx_ge {t j : ℕ} (h : t ≤ j) : iterIdx P t j = P.masterIdx := by
  unfold iterIdx
  rw [nthCode_eq, getD_eq_default_cf]
  exact le_trans (decodeList_length_le t) h

theorem iterEnum_inter_eq_iff {n m k : ℕ} :
    iterEnum P n ∩ iterEnum P m = iterEnum P k ↔
      ∀ j, j < n + m + k →
        P.X (iterIdx P n j) ∩ P.X (iterIdx P m j) = P.X (iterIdx P k j) := by
  constructor
  · intro h j _
    have := congrArg (fun W => fiber W j) h
    simpa only [fiber_inter, fiber_iterEnum] using this
  · intro h
    apply eq_of_fiber_eq
    intro j
    rw [fiber_inter, fiber_iterEnum, fiber_iterEnum, fiber_iterEnum]
    by_cases hj : j < n + m + k
    · exact h j hj
    · rw [iterIdx_ge (show n ≤ j by omega), iterIdx_ge (show m ≤ j by omega),
        iterIdx_ge (show k ≤ j by omega), P.masterIdx_spec, Set.inter_self]

theorem iterEnum_mem (t : ℕ) : (iterSys V).mem (iterEnum P t) := by
  refine ⟨fun j => ?_, t, fun j hj => ?_⟩
  · rw [fiber_iterEnum]; exact P.mem_X _
  · rw [fiber_iterEnum, iterIdx_ge hj, P.masterIdx_spec]

def iterInter (P : ComputablePresentation V) (n m : ℕ) : ℕ :=
  tabCode (interG P) (Nat.pair (n + m) (Nat.pair n m)) (n + m)

theorem iterInter_idx_ge {n m j : ℕ} (hj : n + m ≤ j) :
    iterIdx P (iterInter P n m) j = P.masterIdx := by
  show nthCode (iterInter P n m) j P.masterIdx = _
  rw [iterInter, tabCode_nth_ge hj]

theorem iterInter_idx_lt {n m j : ℕ} (hj : j < n + m) :
    iterIdx P (iterInter P n m) j = P.inter (iterIdx P n j) (iterIdx P m j) := by
  show nthCode (iterInter P n m) j P.masterIdx = _
  rw [iterInter, tabCode_nth_lt hj]
  unfold interG
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem iterEnum_cons_iff {n m : ℕ} :
    (∃ k, iterEnum P k ⊆ iterEnum P n ∩ iterEnum P m) ↔
      ∀ j, j < n + m → ∃ i, P.X i ⊆ P.X (iterIdx P n j) ∩ P.X (iterIdx P m j) := by
  constructor
  · rintro ⟨k, hk⟩ j _
    refine ⟨iterIdx P k j, ?_⟩
    have := fiber_mono hk j
    rwa [fiber_inter, fiber_iterEnum, fiber_iterEnum, fiber_iterEnum] at this
  · intro h
```

```
    refine ⟨iterInter P n m, ?_⟩
    apply subset_of_fiber_subset
    intro j
    rw [fiber_inter, fiber_iterEnum, fiber_iterEnum, fiber_iterEnum]
    by_cases hj : j < n + m
    · rw [iterInter_idx_lt hj]
      obtain ⟨i, hi⟩ := h j hj
      rw [P.inter_spec ⟨i, hi⟩]
    · rw [iterInter_idx_ge (by omega), iterIdx_ge (show n ≤ j by omega),
        iterIdx_ge (show m ≤ j by omega), P.masterIdx_spec, Set.inter_self]

end Iterate

section Coalesced

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty)

variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

variable {P₀ P₁}

variable {h₀ h₁}

theorem osum_eq_master_of_inj₀master {W : Set (Option (α ? β))} (hW : (osum h₀ h₁).mem
    W)
    (hsub : inj₀ V₀.master ⊆ W) : W = sumMaster V₀ V₁ := by
  rcases hW with rfl | ⟨X', hX', hX'ne, rfl⟩ | ⟨Y', hY', -, rfl⟩
  · rfl
  · exact absurd (Set.Subset.antisymm (V₀.sub_master hX') (inj₀_subset_inj₀.mp hsub)) hX
    'ne
  · obtain ⟨a, ha⟩ := h₀ V₀.master V₀.master_mem
    exact absurd (hsub (il_mem_inj₀.mpr ha)) il_mem_inj₁

def osumInMap₀ : ApproximableMap V₀ (osum h₀ h₁) where
  rel X W := V₀.mem X ∧ (osum h₀ h₁).mem W ∧ inj₀ X ⊆ W
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨V₀.master_mem, (osum h₀ h₁).master_mem, inj₀_subset_sumMaster V₀.
    master_mem⟩
  inter_right := by
    rintro X W W' ⟨hX, hW, hsub⟩ ⟨-, hW', hsub'⟩
    refine ⟨hX, ?_, Set.subset_inter hsub hsub'⟩
    by_cases hXm : X = V₀.master
    · subst hXm
      rw [osum_eq_master_of_inj₀master hW hsub, osum_eq_master_of_inj₀master hW' hsub',
        Set.inter_self]
      exact (osum h₀ h₁).master_mem
    · exact (osum h₀ h₁).inter_mem hW hW' (Or.inr (Or.inl ⟨X, hX, hXm, rfl⟩))
        (Set.subset_inter hsub hsub')
  mono := by
    rintro X X' W W' ⟨_, _, hsub⟩ hX'X hWW' hX' hW'
    exact ⟨hX', hW', (inj₀_subset_inj₀.mpr hX'X).trans (hsub.trans hWW')⟩

theorem osum_eq_master_of_inj₁master {W : Set (Option (α ? β))} (hW : (osum h₀ h₁).mem
    W)
```

```
    (hsub : inj₁ V₁.master ⊆ W) : W = sumMaster V₀ V₁ := by
  rcases hW with rfl | ⟨X', hX', -, rfl⟩ | ⟨Y', hY', hY'ne, rfl⟩
  · rfl

  · obtain ⟨b, hb⟩ := h₁ V₁.master V₁.master_mem
    exact absurd (hsub (ir_mem_inj₁.mpr hb)) ir_mem_inj₀
  · exact absurd (Set.Subset.antisymm (V₁.sub_master hY') (inj₁_subset_inj₁.mp hsub)) hY
    'ne

def osumInMap₁ : ApproximableMap V₁ (osum h₀ h₁) where
  rel Y W := V₁.mem Y ∧ (osum h₀ h₁).mem W ∧ inj₁ Y ⊆ W
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨V₁.master_mem, (osum h₀ h₁).master_mem, inj₁_subset_sumMaster V₁.
    master_mem⟩
  inter_right := by
    rintro Y W W' ⟨hY, hW, hsub⟩ ⟨-, hW', hsub'⟩
    refine ⟨hY, ?_, Set.subset_inter hsub hsub'⟩
    by_cases hYm : Y = V₁.master
    · subst hYm
      rw [osum_eq_master_of_inj₁master hW hsub, osum_eq_master_of_inj₁master hW' hsub',
        Set.inter_self]
      exact (osum h₀ h₁).master_mem
    · exact (osum h₀ h₁).inter_mem hW hW' (Or.inr (Or.inr ⟨Y, hY, hYm, rfl⟩))
        (Set.subset_inter hsub hsub')
  mono := by
    rintro Y Y' W W' ⟨_, _, hsub⟩ hY'Y hWW' hY' hW'
    exact ⟨hY', hW', (inj₁_subset_inj₁.mpr hY'Y).trans (hsub.trans hWW')⟩

end Coalesced

section Coalesced

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty)

variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

variable {P₀ P₁}

variable {h₀ h₁}

variable (P₀ P₁)

section CoalescedFunctor

variable {α' β' : Type*} {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'}
  (h₀' : ∀ X, V₀'.mem X → X.Nonempty) (h₁' : ∀ Y, V₁'.mem Y → Y.Nonempty)

theorem osum_mem_subset_inj₀ {W : Set (Option (α ? β))} {X : Set α}
    (hW : (osum h₀ h₁).mem W) (hsub : W ⊆ inj₀ X) :
    ∃ X₂, V₀.mem X₂ ∧ X₂ = V₀.master ∧ W = inj₀ X₂ := by
  rcases hW with rfl | ⟨X₂, hX₂, hne, rfl⟩ | ⟨Y₂, hY₂, hne, rfl⟩
  · exact absurd (hsub none_mem_sumMaster) none_mem_inj₀
  · exact ⟨X₂, hX₂, hne, rfl⟩
  · obtain ⟨b, hb⟩ := h₁ Y₂ hY₂; exact absurd (hsub (ir_mem_inj₁.mpr hb)) ir_mem_inj₀
```

```
end CoalescedFunctor

end Coalesced

section Coalesced

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty)

variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

variable {P₀ P₁}

variable {h₀ h₁}

variable (P₀ P₁)

section CoalescedFunctor

variable {α' β' : Type*} {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'}
  (h₀' : ∀ X, V₀'.mem X → X.Nonempty) (h₁' : ∀ Y, V₁'.mem Y → Y.Nonempty)

theorem osum_mem_subset_inj₁ {W : Set (Option (α ? β))} {Y : Set β}
    (hW : (osum h₀ h₁).mem W) (hsub : W ⊆ inj₁ Y) :
    ∃ Y₂, V₁.mem Y₂ ∧ Y₂ = V₁.master ∧ W = inj₁ Y₂ := by
  rcases hW with rfl | ⟨X₂, hX₂, hne, rfl⟩ | ⟨Y₂, hY₂, hne, rfl⟩
  · exact absurd (hsub none_mem_sumMaster) none_mem_inj₁
  · obtain ⟨a, ha⟩ := h₀ X₂ hX₂; exact absurd (hsub (il_mem_inj₀.mpr ha)) il_mem_inj₁
  · exact ⟨Y₂, hY₂, hne, rfl⟩

end CoalescedFunctor

end Coalesced

section Coalesced

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty)

variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

variable {P₀ P₁}

variable {h₀ h₁}

variable (P₀ P₁)

section CoalescedFunctor

variable {α' β' : Type*} {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'}
  (h₀' : ∀ X, V₀'.mem X → X.Nonempty) (h₁' : ∀ Y, V₁'.mem Y → Y.Nonempty)

def osumMap (f : ApproximableMap V₀ V₀') (g : ApproximableMap V₁ V₁') :
    ApproximableMap (osum h₀ h₁) (osum h₀' h₁') where
  rel W W' := (osum h₀ h₁).mem W ∧ (osum h₀' h₁').mem W' ∧
```

```
  (W' = sumMaster V₀' V₁' ∨
    (∃ X Y', W = inj₀ X ∧ W' = inj₀ Y' ∧ Y' = V₀'.master ∧ f.rel X Y') ∨
    (∃ Y Y', W = inj₁ Y ∧ W' = inj₁ Y' ∧ Y' = V₁'.master ∧ g.rel Y Y'))
rel_dom h := h.1
rel_cod h := h.2.1
master_rel := ⟨(osum h₀ h₁).master_mem, (osum h₀' h₁').master_mem, Or.inl rfl⟩
inter_right := by
  rintro W W'₁ W'₂ ⟨hW, hW'₁, hd₁⟩ ⟨-, hW'₂, hd₂⟩
  have hmem : ∀ W'' : Set (Option (α' ? β')),
      (W'' = sumMaster V₀' V₁' ∨
        (∃ X Y', W = inj₀ X ∧ W'' = inj₀ Y' ∧ Y' = V₀'.master ∧ f.rel X Y') ∨
        (∃ Y Y', W = inj₁ Y ∧ W'' = inj₁ Y' ∧ Y' = V₁'.master ∧ g.rel Y Y')) →
        (osum h₀' h₁').mem W'' := by
    rintro W'' (rfl | ⟨_, Y', _, rfl, hY'ne, hf⟩ | ⟨_, Y', _, rfl, hY'ne, hg⟩)
    · exact (osum h₀' h₁').master_mem
    · exact Or.inr (Or.inl ⟨Y', f.rel_cod hf, hY'ne, rfl⟩)
    · exact Or.inr (Or.inr ⟨Y', g.rel_cod hg, hY'ne, rfl⟩)
  have key : W'₁ ∩ W'₂ = sumMaster V₀' V₁' ∨
      (∃ X Y', W = inj₀ X ∧ W'₁ ∩ W'₂ = inj₀ Y' ∧ Y' = V₀'.master ∧ f.rel X Y') ∨
      (∃ Y Y', W = inj₁ Y ∧ W'₁ ∩ W'₂ = inj₁ Y' ∧ Y' = V₁'.master ∧ g.rel Y Y') := by
    rcases hd₁ with rfl | ⟨X, Y'₁, hWX₁, rfl, hY'₁ne, hf₁⟩ | ⟨Y, Y'₁, hWY₁, rfl, hY'₁ne
  , hg₁⟩
    · have he : sumMaster V₀' V₁' ∩ W'₂ = W'₂ :=
        Set.inter_eq_self_of_subset_right
          ((osum h₀' h₁').sub_master hW'₂ : W'₂ ⊆ sumMaster V₀' V₁')
      rw [he]; exact hd₂
    · rcases hd₂ with rfl | ⟨X', Y'₂, hWX₂, rfl, hY'₂ne, hf₂⟩ | ⟨Y', Y'₂, hWY₂, rfl, hY'
  ₂ne, hg₂⟩
      · rw [Set.inter_eq_left.mpr (inj₀_subset_sumMaster (f.rel_cod hf₁))]
        exact Or.inr (Or.inl ⟨X, Y'₁, hWX₁, rfl, hY'₁ne, hf₁⟩)
      · obtain rfl : X = X' := inj₀_injective (hWX₁.symm.trans hWX₂)
        rw [inj₀_inter]
        exact Or.inr (Or.inl ⟨X, Y'₁ ∩ Y'₂, hWX₁, rfl,
          inter_ne_master_left (f.rel_cod hf₁) hY'₁ne, f.inter_right hf₁ hf₂⟩)
      · exact absurd (hWX₁.symm.trans hWY₂)
          (fun h => not_inj₀_subset_inj₁ (h₀ X (f.rel_dom hf₁)) h.subset)
    · rcases hd₂ with rfl | ⟨X', Y'₂, hWX₂, rfl, hY'₂ne, hf₂⟩ | ⟨Y', Y'₂, hWY₂, rfl, hY'
  ₂ne, hg₂⟩
      · rw [Set.inter_eq_left.mpr (inj₁_subset_sumMaster (g.rel_cod hg₁))]
        exact Or.inr (Or.inr ⟨Y, Y'₁, hWY₁, rfl, hY'₁ne, hg₁⟩)
      · exact absurd (hWY₁.symm.trans hWX₂)
          (fun h => not_inj₁_subset_inj₀ (h₁ Y (g.rel_dom hg₁)) h.subset)
      · obtain rfl : Y = Y' := inj₁_injective (hWY₁.symm.trans hWY₂)
        rw [inj₁_inter]
        exact Or.inr (Or.inr ⟨Y, Y'₁ ∩ Y'₂, hWY₁, rfl,
          inter_ne_master_left (g.rel_cod hg₁) hY'₁ne, g.inter_right hg₁ hg₂⟩)
  exact ⟨hW, hmem _ key, key⟩
mono := by
  rintro W W₂ W' W'₂ ⟨hW, hW', hd⟩ hW₂W hW'W'₂ hW₂mem hW'₂mem
  refine ⟨hW₂mem, hW'₂mem, ?_⟩
  rcases hd with rfl | ⟨X, Y', rfl, rfl, hY'ne, hf⟩ | ⟨Y, Y', rfl, rfl, hY'ne, hg⟩
  · left; exact Set.Subset.antisymm ((osum h₀' h₁').sub_master hW'₂mem) hW'W'₂
  · obtain ⟨X₂, hX₂, hX₂ne, rfl⟩ := osum_mem_subset_inj₀ hW₂mem hW₂W
    have hXX₂ : X₂ ⊆ X := inj₀_subset_inj₀.mp hW₂W
    rcases hW'₂mem with rfl | ⟨Y'₂, hY'₂, hY'₂ne, rfl⟩ | ⟨Z'₂, hZ'₂, hZ'₂ne, rfl⟩
    · left; rfl
```

```
      · exact Or.inr (Or.inl ⟨X₂, Y'₂, rfl, rfl, hY'₂ne,
          f.mono hf hXX₂ (inj₀_subset_inj₀.mp hW'W'₂) hX₂ hY'₂⟩)
      · exact (not_inj₀_subset_inj₁ (h₀' Y' (f.rel_cod hf)) hW'W'₂).elim
    · obtain ⟨Y₂, hY₂, hY₂ne, rfl⟩ := osum_mem_subset_inj₁ hW₂mem hW₂W
      have hYY₂ : Y₂ ⊆ Y := inj₁_subset_inj₁.mp hW₂W
      rcases hW'₂mem with rfl | ⟨X'₂, hX'₂, hX'₂ne, rfl⟩ | ⟨Y'₂, hY'₂, hY'₂ne, rfl⟩
      · left; rfl
      · exact (not_inj₁_subset_inj₀ (h₁' Y' (g.rel_cod hg)) hW'W'₂).elim
      · exact Or.inr (Or.inr ⟨Y₂, Y'₂, rfl, rfl, hY'₂ne,
          g.mono hg hYY₂ (inj₁_subset_inj₁.mp hW'W'₂) hY₂ hY'₂⟩)

end CoalescedFunctor

end Coalesced

section Iterate

open Domain.Recursive

variable {V : NeighborhoodSystem α} (P : ComputablePresentation V)

variable {P}

theorem primrec_iterIdx_proj {codeProj : ℕ → ℕ} (hc : Nat.Primrec codeProj) :
    Nat.Primrec (fun w => iterIdx P (codeProj w) w.unpair.1) := by
  refine (primrec_nthCode.comp (hc.pair (Nat.Primrec.left.pair
    (Nat.Primrec.const P.masterIdx)))).of_eq (fun w => ?_)
  simp only [iterIdx, unpair_pair_fst, unpair_pair_snd]

theorem primrec_interG : Nat.Primrec (interG P) := by
  have hA : Nat.Primrec (fun s => iterIdx P s.unpair.2.unpair.1 s.unpair.1) :=
    primrec_iterIdx_proj (Nat.Primrec.left.comp Nat.Primrec.right)
  have hB : Nat.Primrec (fun s => iterIdx P s.unpair.2.unpair.2 s.unpair.1) :=
    primrec_iterIdx_proj (Nat.Primrec.right.comp Nat.Primrec.right)
  refine (P.inter_primrec.comp (hA.pair hB)).of_eq (fun s => ?_)
  unfold interG
  simp only [unpair_pair_fst, unpair_pair_snd]

noncomputable def iterPresentation (P : ComputablePresentation V) :
    ComputablePresentation (iterSys V) where
  X := iterEnum P
  mem_X := iterEnum_mem
  surj := by
    rintro W hW
    obtain ⟨N, hN⟩ := hW.2
    obtain ⟨L, hlen, hL⟩ := exists_list_fiber (P := P) hW N
    refine ⟨encodeList L, ?_⟩
    apply eq_of_fiber_eq
    intro j
    show P.X (nthCode (encodeList L) j P.masterIdx) = fiber W j
    rw [nthCode_eq, decodeList_encodeList]
    by_cases hj : j < N
    · exact hL j hj
    · rw [getD_eq_default_cf L P.masterIdx (by rw [hlen]; omega), P.masterIdx_spec,
        hN j (by omega)]
  interEq_computable := by
```

```
  have hbound : Nat.Primrec
      (fun t : ℕ => t.unpair.1 + t.unpair.2.unpair.1 + t.unpair.2.unpair.2) :=
    primrec_add₂ (primrec_add₂ Nat.Primrec.left (Nat.Primrec.left.comp Nat.Primrec.
  right))
      (Nat.Primrec.right.comp Nat.Primrec.right)
  have hA : Nat.Primrec (fun w => iterIdx P w.unpair.2.unpair.1 w.unpair.1) :=
    primrec_iterIdx_proj (Nat.Primrec.left.comp Nat.Primrec.right)
  have hB : Nat.Primrec (fun w => iterIdx P w.unpair.2.unpair.2.unpair.1 w.unpair.1)
   :=
    primrec_iterIdx_proj (Nat.Primrec.left.comp (Nat.Primrec.right.comp Nat.Primrec.
  right))
  have hC : Nat.Primrec (fun w => iterIdx P w.unpair.2.unpair.2.unpair.2 w.unpair.1)
   :=
    primrec_iterIdx_proj (Nat.Primrec.right.comp (Nat.Primrec.right.comp Nat.Primrec
  .right))
  have hq : RecDecidable (fun w => P.X (iterIdx P w.unpair.2.unpair.1 w.unpair.1)
      ∩ P.X (iterIdx P w.unpair.2.unpair.2.unpair.1 w.unpair.1)
      = P.X (iterIdx P w.unpair.2.unpair.2.unpair.2 w.unpair.1)) := by
    refine RecDecidable.of_iff (fun w => ?_) (P.interEq_computable.comp (hA.pair (hB
  .pair hC)))
    simp only [unpair_pair_fst, unpair_pair_snd]
  refine RecDecidable.of_iff (fun t => ?_) (hq.bForall hbound)
  simp only [unpair_pair_fst, unpair_pair_snd]
  exact iterEnum_inter_eq_iff
cons_computable := by
  have hbound : Nat.Primrec (fun t : ℕ => t.unpair.1 + t.unpair.2) :=
    primrec_add₂ Nat.Primrec.left Nat.Primrec.right
  have hA : Nat.Primrec (fun w => iterIdx P w.unpair.2.unpair.1 w.unpair.1) :=
    primrec_iterIdx_proj (Nat.Primrec.left.comp Nat.Primrec.right)
  have hB : Nat.Primrec (fun w => iterIdx P w.unpair.2.unpair.2 w.unpair.1) :=
    primrec_iterIdx_proj (Nat.Primrec.right.comp Nat.Primrec.right)
  have hq : RecDecidable (fun w => ∃ i, P.X i ⊆ P.X (iterIdx P w.unpair.2.unpair.1 w
  .unpair.1)
      ∩ P.X (iterIdx P w.unpair.2.unpair.2 w.unpair.1)) := by
    refine RecDecidable.of_iff (fun w => ?_) (P.cons_computable.comp (hA.pair hB))
    simp only [unpair_pair_fst, unpair_pair_snd]
  refine RecDecidable.of_iff (fun t => ?_) (hq.bForall hbound)
  simp only [unpair_pair_fst, unpair_pair_snd]
  exact iterEnum_cons_iff
inter := iterInter P
inter_primrec := by
  have hr : Nat.Primrec (fun t => Nat.pair
      (Nat.pair (t.unpair.1 + t.unpair.2) (Nat.pair t.unpair.1 t.unpair.2))
      (t.unpair.1 + t.unpair.2)) :=
    ((primrec_add₂ Nat.Primrec.left Nat.Primrec.right).pair
      (Nat.Primrec.left.pair Nat.Primrec.right)).pair
      (primrec_add₂ Nat.Primrec.left Nat.Primrec.right)
  refine ((primrec_tabCode (primrec_interG (P := P))).comp hr).of_eq (fun t => ?_)
  show tabCode (interG P) _ _ = iterInter P t.unpair.1 t.unpair.2
  unfold iterInter
  simp only [unpair_pair_fst, unpair_pair_snd]
inter_spec := by
  intro n m hcons
  apply eq_of_fiber_eq
  intro j
  rw [fiber_inter, fiber_iterEnum, fiber_iterEnum, fiber_iterEnum]
```

```
    by_cases hj : j < n + m
    · rw [iterInter_idx_lt hj, P.inter_spec ((iterEnum_cons_iff (P := P)).mp hcons j hj
    )]
    · rw [iterInter_idx_ge (by omega), iterIdx_ge (show n ≤ j by omega),
        iterIdx_ge (show m ≤ j by omega), P.masterIdx_spec, Set.inter_self]
  masterIdx := 0
  masterIdx_spec := by
    apply eq_of_fiber_eq
    intro j
    rw [fiber_iterEnum, fiber_iterSys_master, iterIdx_ge (Nat.zero_le j), P.
    masterIdx_spec]

end Iterate

section Smash

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

variable {P₀ P₁}

variable (P₀ P₁)

section SmashFunctor

variable {α' β' : Type*} {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'}

def smashMap (f : ApproximableMap V₀ V₀') (g : ApproximableMap V₁ V₁') :
    ApproximableMap (smash V₀ V₁) (smash V₀' V₁') where
  rel W W' := (smash V₀ V₁).mem W ∧ (smash V₀' V₁').mem W' ∧
    (W' = prodNbhd V₀'.master V₁'.master ∨
      ∃ A B A' B', W = prodNbhd A B ∧ W' = prodNbhd A' B' ∧
        A' = V₀'.master ∧ B' = V₁'.master ∧ f.rel A A' ∧ g.rel B B')
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(smash V₀ V₁).master_mem, (smash V₀' V₁').master_mem, Or.inl rfl⟩
  inter_right := by
    rintro W W'₁ W'₂ ⟨hW, hW'₁, hd₁⟩ ⟨-, hW'₂, hd₂⟩
    have key : W'₁ ∩ W'₂ = prodNbhd V₀'.master V₁'.master ∨
        ∃ A B A' B', W = prodNbhd A B ∧ W'₁ ∩ W'₂ = prodNbhd A' B' ∧
          A' = V₀'.master ∧ B' = V₁'.master ∧ f.rel A A' ∧ g.rel B B' := by
      rcases hd₁ with rfl | ⟨A, B, A'₁, B'₁, hWAB, rfl, hA'₁, hB'₁, hf₁, hg₁⟩
      · rw [Set.inter_eq_right.mpr (show W'₂ ⊆ prodNbhd V₀'.master V₁'.master from
          (smash V₀' V₁').sub_master hW'₂)]
        exact hd₂
      · rcases hd₂ with rfl | ⟨A₂, B₂, A'₂, B'₂, hWAB₂, rfl, hA'₂, hB'₂, hf₂, hg₂⟩
        · rw [Set.inter_eq_left.mpr (show prodNbhd A'₁ B'₁ ⊆ prodNbhd V₀'.master V₁'.
    master from
            (smash V₀' V₁').sub_master hW'₁)]
          exact Or.inr ⟨A, B, A'₁, B'₁, hWAB, rfl, hA'₁, hB'₁, hf₁, hg₁⟩
        · obtain ⟨rfl, rfl⟩ := prodNbhd_injective (hWAB.symm.trans hWAB₂)
          rw [prodNbhd_inter]
          exact Or.inr ⟨A, B, A'₁ ∩ A'₂, B'₁ ∩ B'₂, hWAB, rfl,
            inter_ne_master_left (f.rel_cod hf₁) hA'₁,
            inter_ne_master_left (g.rel_cod hg₁) hB'₁,
            f.inter_right hf₁ hf₂, g.inter_right hg₁ hg₂⟩
```

```
    refine ⟨hW, ?_, key⟩
    rcases key with hm | ⟨A, B, A', B', -, hWW', hA', hB', hf, hg⟩
    · rw [hm]; exact (smash V₀' V₁').master_mem
    · rw [hWW']; exact smash_mem_proper (f.rel_cod hf) hA' (g.rel_cod hg) hB'
  mono := by
    rintro W W₂ W' W'₂ ⟨hW, hW', hd⟩ hW₂W hW'W'₂ hW₂mem hW'₂mem
    refine ⟨hW₂mem, hW'₂mem, ?_⟩
    rcases hd with rfl | ⟨A, B, A', B', rfl, rfl, hA', hB', hf, hg⟩
    · left; exact Set.Subset.antisymm ((smash V₀' V₁').sub_master hW'₂mem) hW'W'₂
    · obtain ⟨A₂, B₂, hA₂, hB₂, rfl⟩ := smash_mem_prodNbhd_form hW₂mem
      obtain ⟨hA₂A, hB₂B⟩ := prodNbhd_subset_iff.mp hW₂W
      rcases smash_mem_iff.mp hW'₂mem with rfl |
        ⟨A'₂, B'₂, hA'₂, hA'₂ne, hB'₂, hB'₂ne, rfl⟩
      · left; rfl
      · obtain ⟨hA'A'₂, hB'B'₂⟩ := prodNbhd_subset_iff.mp hW'W'₂
        exact Or.inr ⟨A₂, B₂, A'₂, B'₂, rfl, rfl, hA'₂ne, hB'₂ne,
          f.mono hf hA₂A hA'A'₂ hA₂ hA'₂, g.mono hg hB₂B hB'B'₂ hB₂ hB'₂⟩

end SmashFunctor

end Smash

end

section
variable {α β ? : Type*}

def ComputablePresentation.toScott {V : NeighborhoodSystem α} (P :
    ComputablePresentation V) :
    ScottPresentation V where
  X := P.X
  mem_X := P.mem_X
  surj := P.surj
  interEq_computable := P.interEq_computable
  cons_computable := P.cons_computable

namespace ScottPresentation

variable {V : NeighborhoodSystem α} (P : ScottPresentation V)

end ScottPresentation

open Exercise510

section Iterate

open Domain.Recursive

variable {V : NeighborhoodSystem α} (P : ComputablePresentation V)

variable {P}

@[simp] theorem iterPresentation_X (t : ℕ) : (iterPresentation P).X t = iterEnum P t
    := rfl

end Iterate
```

```
end

section
variable {α β ? : Type*}

theorem NeighborhoodSystem.IsEffectivelyGiven.toS {V : NeighborhoodSystem α}
    (h : V.IsEffectivelyGiven) : V.IsEffectivelyGivenS :=
  h.elim fun P => ⟨P.toScott⟩

open Exercise510

section Iterate

open Domain.Recursive

variable {V : NeighborhoodSystem α} (P : ComputablePresentation V)

variable {P}

theorem iterSys_isEffectivelyGiven (e : V.IsEffectivelyGiven) :
    (iterSys V).IsEffectivelyGiven := by
  obtain ⟨Q⟩ := e
  exact ⟨iterPresentation (P := Q)⟩

end Iterate

section Coalesced


variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty)

variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

variable {P₀ P₁}

variable {h₀ h₁}

variable (P₀ P₁)

theorem osumInMap₀_isComputable :
    ComputableMapsS P₀.toScott (osumPresentation h₀ h₁ (P₀ := P₀) (P₁ := P₁)) osumInMap₀
    := by
  constructor
  have hT0 : RecDecidable (fun t => t.unpair.2.unpair.1 = 0) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 0)
  have hT1 : RecDecidable (fun t => t.unpair.2.unpair.1 = 1) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 1)
  have hP0 : RecDecidable (fun t => P₀.X t.unpair.2.unpair.2 = V₀.master) :=
    (proper₀_dec P₀).comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hP1 : RecDecidable (fun t => P₁.X t.unpair.2.unpair.2 = V₁.master) :=
    (proper₁_dec P₁).comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hInc : RecDecidable (fun t => P₀.X t.unpair.1 ⊆ P₀.X t.unpair.2.unpair.2) :=
    RecDecidable.of_iff (fun t => by simp only [unpair_pair_fst, unpair_pair_snd])
      (P₀.incl_computable.comp (Nat.Primrec.left.pair (Nat.Primrec.right.comp Nat.
    Primrec.right)))
```

```
  refine (RecDecidable.of_iff (fun t => ?_)
    ((hT0.and (hP0.and hInc)).or ((hT0.and hP0).not.and (hT1.and hP1).not))).re
  show (osumInMap₀ (h₀ := h₀) (h₁ := h₁)).rel (P₀.X t.unpair.1) (osumEnum P₀ P₁ t.unpair
    .2) ↔ _
  rw [show (osumInMap₀ (h₀ := h₀) (h₁ := h₁)).rel (P₀.X t.unpair.1) (osumEnum P₀ P₁ t.
    unpair.2)
      ↔ inj₀ (P₀.X t.unpair.1) ⊆ osumEnum P₀ P₁ t.unpair.2 from
    ⟨fun h => h.2.2, fun h => ⟨P₀.mem_X _, osumEnum_mem h₀ h₁ _, h⟩⟩]
  by_cases hL : t.unpair.2.unpair.1 = 0 ∧ P₀.X t.unpair.2.unpair.2 = V₀.master
  · rw [osumEnum_left hL, inj₀_subset_inj₀]
    exact ⟨fun h => Or.inl ⟨hL.1, hL.2, h⟩,
      fun h => h.elim (fun h => h.2.2) (fun h => absurd hL h.1)⟩
  · by_cases hR : t.unpair.2.unpair.1 = 1 ∧ P₁.X t.unpair.2.unpair.2 = V₁.master
    · rw [osumEnum_right hR]
      refine ⟨fun h => ?_, fun h => h.elim (fun h => absurd ⟨h.1, h.2.1⟩ hL)
        (fun h => absurd hR h.2)⟩
      obtain ⟨a, ha⟩ := h₀ _ (P₀.mem_X t.unpair.1)
      exact absurd (h (il_mem_inj₀.mpr ha)) il_mem_inj₁
    · rw [osumEnum_master hL hR]
      exact ⟨fun _ => Or.inr ⟨hL, hR⟩, fun _ => inj₀_subset_sumMaster (P₀.mem_X _)⟩

theorem osumInMap₁_isComputable :
    ComputableMapsS P₁.toScott (osumPresentation h₀ h₁ (P₀ := P₀) (P₁ := P₁)) osumInMap₁
    := by
  constructor
  have hT0 : RecDecidable (fun t => t.unpair.2.unpair.1 = 0) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 0)
  have hT1 : RecDecidable (fun t => t.unpair.2.unpair.1 = 1) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 1)
  have hP0 : RecDecidable (fun t => P₀.X t.unpair.2.unpair.2 = V₀.master) :=
    (proper₀_dec P₀).comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hP1 : RecDecidable (fun t => P₁.X t.unpair.2.unpair.2 = V₁.master) :=
    (proper₁_dec P₁).comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hInc : RecDecidable (fun t => P₁.X t.unpair.1 ⊆ P₁.X t.unpair.2.unpair.2) :=
    RecDecidable.of_iff (fun t => by simp only [unpair_pair_fst, unpair_pair_snd])
      (P₁.incl_computable.comp (Nat.Primrec.left.pair (Nat.Primrec.right.comp Nat.
    Primrec.right)))
  refine (RecDecidable.of_iff (fun t => ?_)
    ((hT1.and (hP1.and hInc)).or ((hT0.and hP0).not.and (hT1.and hP1).not))).re
  show (osumInMap₁ (h₀ := h₀) (h₁ := h₁)).rel (P₁.X t.unpair.1) (osumEnum P₀ P₁ t.unpair
    .2) ↔ _
  rw [show (osumInMap₁ (h₀ := h₀) (h₁ := h₁)).rel (P₁.X t.unpair.1) (osumEnum P₀ P₁ t.
    unpair.2)
      ↔ inj₁ (P₁.X t.unpair.1) ⊆ osumEnum P₀ P₁ t.unpair.2 from
    ⟨fun h => h.2.2, fun h => ⟨P₁.mem_X _, osumEnum_mem h₀ h₁ _, h⟩⟩]
  by_cases hL : t.unpair.2.unpair.1 = 0 ∧ P₀.X t.unpair.2.unpair.2 = V₀.master
  · rw [osumEnum_left hL]
    refine ⟨fun h => ?_, fun h => ?_⟩
    · obtain ⟨b, hb⟩ := h₁ _ (P₁.mem_X t.unpair.1)
      exact absurd (h (ir_mem_inj₁.mpr hb)) ir_mem_inj₀
    · rcases h with ⟨h1, -⟩ | ⟨hn0, -⟩
      · rw [hL.1] at h1; exact absurd h1 (by decide)
      · exact absurd hL hn0
  · by_cases hR : t.unpair.2.unpair.1 = 1 ∧ P₁.X t.unpair.2.unpair.2 = V₁.master
    · rw [osumEnum_right hR, inj₁_subset_inj₁]
      exact ⟨fun h => Or.inl ⟨hR.1, hR.2, h⟩,
```

```
        fun h => h.elim (fun h => h.2.2) (fun h => absurd hR h.2)⟩
    · rw [osumEnum_master hL hR]
      exact ⟨fun _ => Or.inr ⟨hL, hR⟩, fun _ => inj₁_subset_sumMaster (P₁.mem_X _)⟩

end Coalesced

section Coalesced

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty)

variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

variable {P₀ P₁}

variable {h₀ h₁}

variable (P₀ P₁)

section CoalescedFunctor

variable {α' β' : Type*} {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'}
  (h₀' : ∀ X, V₀'.mem X → X.Nonempty) (h₁' : ∀ Y, V₁'.mem Y → Y.Nonempty)

theorem osumMap_isComputable (P₀' : ComputablePresentation V₀') (P₁' :
    ComputablePresentation V₁')
    {f : ApproximableMap V₀ V₀'} {g : ApproximableMap V₁ V₁'}
    (hf : ComputableMapS P₀.toScott P₀'.toScott f)
    (hg : ComputableMapS P₁.toScott P₁'.toScott g) :
    ComputableMapS (osumPresentation h₀ h₁ (P₀ := P₀) (P₁ := P₁))
      (osumPresentation h₀' h₁' (P₀ := P₀') (P₁ := P₁')) (osumMap h₀' h₁' f g) := by
  constructor
  have mT0 : RecDecidable (fun t => t.unpair.2.unpair.1 = 0) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 0)
  have mT1 : RecDecidable (fun t => t.unpair.2.unpair.1 = 1) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 1)
  have mP0 : RecDecidable (fun t => P₀'.X t.unpair.2.unpair.2 = V₀'.master) :=
    (proper₀_dec P₀').comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have mP1 : RecDecidable (fun t => P₁'.X t.unpair.2.unpair.2 = V₁'.master) :=
    (proper₁_dec P₁').comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have nT0 : RecDecidable (fun t => t.unpair.1.unpair.1 = 0) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const 0)
  have nT1 : RecDecidable (fun t => t.unpair.1.unpair.1 = 1) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const 1)
  have nP0 : RecDecidable (fun t => P₀.X t.unpair.1.unpair.2 = V₀.master) :=
    (proper₀_dec P₀).comp (Nat.Primrec.right.comp Nat.Primrec.left)
  have nP1 : RecDecidable (fun t => P₁.X t.unpair.1.unpair.2 = V₁.master) :=
    (proper₁_dec P₁).comp (Nat.Primrec.right.comp Nat.Primrec.left)
  have Hf : REPred (fun t => f.rel (P₀.toScott.X t.unpair.1.unpair.2)
      (P₀'.toScott.X t.unpair.2.unpair.2)) :=
    REPred.of_iff (fun t => by simp only [unpair_pair_fst, unpair_pair_snd])
      (hf.out.comp ((Nat.Primrec.right.comp Nat.Primrec.left).pair
        (Nat.Primrec.right.comp Nat.Primrec.right)))
  have Hg : REPred (fun t => g.rel (P₁.toScott.X t.unpair.1.unpair.2)
      (P₁'.toScott.X t.unpair.2.unpair.2)) :=
    REPred.of_iff (fun t => by simp only [unpair_pair_fst, unpair_pair_snd])
```

```
    (hg.out.comp ((Nat.Primrec.right.comp Nat.Primrec.left).pair
      (Nat.Primrec.right.comp Nat.Primrec.right)))
have hImp : RecDecidable (fun t => ¬(t.unpair.2.unpair.1 = 0 ∧ P₀'.X t.unpair.2.
  unpair.2 = V₀'.master)
    ∧ ¬(t.unpair.2.unpair.1 = 1 ∧ P₁'.X t.unpair.2.unpair.2 = V₁'.master)) :=
  (mT0.and mP0).not.and (mT1.and mP1).not
refine REPred.of_iff (fun t => ?_)
  ((hImp.re).or ((((mT0.and mP0).and (nT0.and nP0)).re.and Hf).or
    (((mT1.and mP1).and (nT1.and nP1)).re.and Hg)))
show (osumMap h₀' h₁' f g).rel (osumEnum P₀ P₁ t.unpair.1) (osumEnum P₀' P₁' t.unpair
  .2) ↔ _
by_cases hm0 : t.unpair.2.unpair.1 = 0 ∧ P₀'.X t.unpair.2.unpair.2 = V₀'.master
· rw [osumEnum_left hm0]
  constructor
  · rintro ⟨-, -, hd⟩
    rcases hd with hmaster | ⟨X, Y', hnX, hW'eq, -, hf⟩ | ⟨Y, Y', -, hW'eq, -, -⟩
    · exact absurd hmaster inj₀_ne_sumMaster
    · obtain rfl : Y' = P₀'.X t.unpair.2.unpair.2 := (inj₀_injective hW'eq).symm
      by_cases hn0 : t.unpair.1.unpair.1 = 0 ∧ P₀.X t.unpair.1.unpair.2 = V₀.master
      · rw [osumEnum_left hn0] at hnX
        obtain rfl : P₀.X t.unpair.1.unpair.2 = X := inj₀_injective hnX
        exact Or.inr (Or.inl ⟨⟨hm0, hn0⟩, hf⟩)
      · exfalso
        by_cases hn1 : t.unpair.1.unpair.1 = 1 ∧ P₁.X t.unpair.1.unpair.2 = V₁.master
        · rw [osumEnum_right hn1] at hnX
          obtain ⟨b, hb⟩ := h₁ _ (P₁.mem_X _)
          exact ir_mem_inj₀ (hnX ▸ ir_mem_inj₁.mpr hb)
        · rw [osumEnum_master hn0 hn1] at hnX
          exact none_mem_inj₀ (hnX ▸ none_mem_sumMaster)
    · obtain ⟨a, ha⟩ := h₀' _ (P₀'.mem_X _)
      exact (il_mem_inj₁ (hW'eq ▸ il_mem_inj₀.mpr ha)).elim
  · rintro (himp | ⟨⟨-, hn0⟩, hf⟩ | ⟨⟨hm1, -⟩, -⟩)
    · exact absurd hm0 himp.1
    · exact ⟨osumEnum_mem h₀ h₁ _, Or.inr (Or.inl ⟨_, P₀'.mem_X _, hm0.2, rfl⟩),
        Or.inr (Or.inl ⟨_, _, osumEnum_left hn0, rfl, hm0.2, hf⟩)⟩
    · obtain ⟨he, -⟩ := hm1; rw [hm0.1] at he; exact absurd he (by decide)
· by_cases hm1 : t.unpair.2.unpair.1 = 1 ∧ P₁'.X t.unpair.2.unpair.2 = V₁'.master
  · rw [osumEnum_right hm1]
    constructor
    · rintro ⟨-, -, hd⟩
      rcases hd with hmaster | ⟨X, Y', -, hW'eq, -, -⟩ | ⟨Y, Y', hnY, hW'eq, -, hg⟩
      · exact absurd hmaster inj₁_ne_sumMaster
      · exact absurd hW'eq.symm (inj₀_ne_inj₁_of_nonempty (h₁' _ (P₁'.mem_X _)))
      · obtain rfl : Y' = P₁'.X t.unpair.2.unpair.2 := (inj₁_injective hW'eq).symm
        by_cases hn1 : t.unpair.1.unpair.1 = 1 ∧ P₁.X t.unpair.1.unpair.2 = V₁.master
        · rw [osumEnum_right hn1] at hnY
          obtain rfl : P₁.X t.unpair.1.unpair.2 = Y := inj₁_injective hnY
          exact Or.inr (Or.inr ⟨⟨hm1, hn1⟩, hg⟩)
        · exfalso
          by_cases hn0 : t.unpair.1.unpair.1 = 0 ∧ P₀.X t.unpair.1.unpair.2 = V₀.
  master
          · rw [osumEnum_left hn0] at hnY
            obtain ⟨a, ha⟩ := h₀ _ (P₀.mem_X _)
            exact il_mem_inj₁ (hnY ▸ il_mem_inj₀.mpr ha)
          · rw [osumEnum_master hn0 hn1] at hnY
            exact none_mem_inj₁ (hnY ▸ none_mem_sumMaster)
```

```
      · rintro (himp | ⟨⟨hm0', -⟩, -⟩ | ⟨⟨-, hn1⟩, hg⟩)
        · exact absurd hm1 himp.2
        · obtain ⟨he, -⟩ := hm0'; rw [hm1.1] at he; exact absurd he (by decide)
        · exact ⟨osumEnum_mem h₀ h₁ _, Or.inr (Or.inr ⟨_, P₁'.mem_X _, hm1.2, rfl⟩),
            Or.inr (Or.inr ⟨_, _, osumEnum_right hn1, rfl, hm1.2, hg⟩)⟩
    · rw [osumEnum_master hm0 hm1]
      constructor
      · intro _; exact Or.inl ⟨hm0, hm1⟩
      · intro _
        exact ⟨osumEnum_mem h₀ h₁ _, (osum h₀' h₁').master_mem, Or.inl rfl⟩

end CoalescedFunctor

theorem osumOutMap₀_isComputable :
    ComputableMapS (osumPresentation h₀ h₁ (P₀ := P₀) (P₁ := P₁)) P₀.toScott osumOutMap₀
     := by
  constructor
  obtain ⟨k0, hk0⟩ := P₀.surj V₀.master_mem
  have hT0 : RecDecidable (fun t => t.unpair.1.unpair.1 = 0) :=
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const 0)
  have hP0 : RecDecidable (fun t => P₀.X t.unpair.1.unpair.2 = V₀.master) :=
    (proper₀_dec P₀).comp (Nat.Primrec.right.comp Nat.Primrec.left)
  have hIncL : RecDecidable (fun t => P₀.X t.unpair.1.unpair.2 ⊆ P₀.X t.unpair.2) :=
    RecDecidable.of_iff (fun t => by simp only [unpair_pair_fst, unpair_pair_snd])
      (P₀.incl_computable.comp ((Nat.Primrec.right.comp Nat.Primrec.left).pair Nat.
    Primrec.right))
  have hIncM : RecDecidable (fun t => V₀.master ⊆ P₀.X t.unpair.2) :=
    RecDecidable.of_iff (fun t => by simp only [unpair_pair_fst, unpair_pair_snd, hk0
    ])
      (P₀.incl_computable.comp ((Nat.Primrec.const k0).pair Nat.Primrec.right))
  refine (RecDecidable.of_iff (fun t => ?_)
    ((hT0.and (hP0.and hIncL)).or ((hT0.and hP0).not.and hIncM))).re
  show (osumOutMap₀ (h₀ := h₀) (h₁ := h₁)).rel (osumEnum P₀ P₁ t.unpair.1) (P₀.X t.
    unpair.2) ↔ _
  rw [show (osumOutMap₀ (h₀ := h₀) (h₁ := h₁)).rel (osumEnum P₀ P₁ t.unpair.1) (P₀.X t.
    unpair.2)
      ↔ leftPart V₀ (osumEnum P₀ P₁ t.unpair.1) ⊆ P₀.X t.unpair.2 from
    ⟨fun h => h.2.2, fun h => ⟨osumEnum_mem h₀ h₁ _, P₀.mem_X _, h⟩⟩]
  by_cases hL : t.unpair.1.unpair.1 = 0 ∧ P₀.X t.unpair.1.unpair.2 = V₀.master
  · rw [osumEnum_left hL, leftPart_inj₀]
    exact ⟨fun h => Or.inl ⟨hL.1, hL.2, h⟩,
      fun h => h.elim (fun h => h.2.2) (fun h => absurd hL h.1)⟩
  · by_cases hR : t.unpair.1.unpair.1 = 1 ∧ P₁.X t.unpair.1.unpair.2 = V₁.master
    · rw [osumEnum_right hR, leftPart_inj₁ V₀ (h₁ _ (P₁.mem_X _))]
      exact ⟨fun h => Or.inr ⟨hL, h⟩,
        fun h => h.elim (fun h => absurd ⟨h.1, h.2.1⟩ hL) (fun h => h.2)⟩
    · rw [osumEnum_master hL hR, leftPart_sumMaster]
      exact ⟨fun h => Or.inr ⟨hL, h⟩,
        fun h => h.elim (fun h => absurd ⟨h.1, h.2.1⟩ hL) (fun h => h.2)⟩

theorem osumOutMap₁_isComputable :
    ComputableMapS (osumPresentation h₀ h₁ (P₀ := P₀) (P₁ := P₁)) P₁.toScott osumOutMap₁
     := by
  constructor
  obtain ⟨k1, hk1⟩ := P₁.surj V₁.master_mem
  have hT1 : RecDecidable (fun t => t.unpair.1.unpair.1 = 1) :=
```

```
    RecDecidable.natEq (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.Primrec.const 1)
  have hP1 : RecDecidable (fun t => P₁.X t.unpair.1.unpair.2 = V₁.master) :=
    (proper₁_dec P₁).comp (Nat.Primrec.right.comp Nat.Primrec.left)
  have hIncR : RecDecidable (fun t => P₁.X t.unpair.1.unpair.2 ⊆ P₁.X t.unpair.2) :=
    RecDecidable.of_iff (fun t => by simp only [unpair_pair_fst, unpair_pair_snd])
      (P₁.incl_computable.comp ((Nat.Primrec.right.comp Nat.Primrec.left).pair Nat.
    Primrec.right))
  have hIncM : RecDecidable (fun t => V₁.master ⊆ P₁.X t.unpair.2) :=
    RecDecidable.of_iff (fun t => by simp only [unpair_pair_fst, unpair_pair_snd, hk1
    ])
      (P₁.incl_computable.comp ((Nat.Primrec.const k1).pair Nat.Primrec.right))
  refine (RecDecidable.of_iff (fun t => ?_)
    ((hT1.and (hP1.and hIncR)).or ((hT1.and hP1).not.and hIncM))).re
  show (osumOutMap₁ (h₀ := h₀) (h₁ := h₁)).rel (osumEnum P₀ P₁ t.unpair.1) (P₁.X t.
    unpair.2) ↔ _
  rw [show (osumOutMap₁ (h₀ := h₀) (h₁ := h₁)).rel (osumEnum P₀ P₁ t.unpair.1) (P₁.X t.
    unpair.2)
      ↔ rightPart V₁ (osumEnum P₀ P₁ t.unpair.1) ⊆ P₁.X t.unpair.2 from
    ⟨fun h => h.2.2, fun h => ⟨osumEnum_mem h₀ h₁ _, P₁.mem_X _, h⟩⟩]
  by_cases hR : t.unpair.1.unpair.1 = 1 ∧ P₁.X t.unpair.1.unpair.2 = V₁.master
  · rw [osumEnum_right hR, rightPart_inj₁]
    exact ⟨fun h => Or.inl ⟨hR.1, hR.2, h⟩,
      fun h => h.elim (fun h => h.2.2) (fun h => absurd hR h.1)⟩
  · by_cases hL : t.unpair.1.unpair.1 = 0 ∧ P₀.X t.unpair.1.unpair.2 = V₀.master
    · rw [osumEnum_left hL, rightPart_inj₀ V₁ (h₀ _ (P₀.mem_X _))]
      exact ⟨fun h => Or.inr ⟨hR, h⟩,
        fun h => h.elim (fun h => absurd ⟨h.1, h.2.1⟩ hR) (fun h => h.2)⟩
    · rw [osumEnum_master hL hR, rightPart_sumMaster]
      exact ⟨fun h => Or.inr ⟨hR, h⟩,
        fun h => h.elim (fun h => absurd ⟨h.1, h.2.1⟩ hR) (fun h => h.2)⟩

end Coalesced

section Coalesced

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty)

variable (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

variable {P₀ P₁}

include h₀ h₁ in

theorem osum_isEffectivelyGivenS (e₀ : V₀.IsEffectivelyGiven) (e₁ : V₁.
    IsEffectivelyGiven) :
    (osum h₀ h₁).IsEffectivelyGivenS := by
  obtain ⟨Q₀⟩ := e₀; obtain ⟨Q₁⟩ := e₁
  exact ⟨osumPresentation h₀ h₁ (P₀ := Q₀) (P₁ := Q₁)⟩

end Coalesced

section Coalesced

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (h₀ : ∀ X, V₀.mem X → X.Nonempty) (h₁ : ∀ Y, V₁.mem Y → Y.Nonempty)
```

```
theorem osum_mem_iff {W : Set (Option (α ? β))} :
    (osum h₀ h₁).mem W ↔ W = sumMaster V₀ V₁ ∨
      (∃ X, V₀.mem X ∧ X = V₀.master ∧ W = inj₀ X) ∨
      (∃ Y, V₁.mem Y ∧ Y = V₁.master ∧ W = inj₁ Y) := Iff.rfl

end Coalesced

section Iterate

open Domain.Recursive

variable {V : NeighborhoodSystem α} (P : ComputablePresentation V)

variable {P}

theorem projN_isComputable (P : ComputablePresentation V) (n : ℕ) :
    ComputableMap (iterPresentation P) P (projN V n) := by
  constructor
  have hincl : RecDecidable (fun s => P.X s.unpair.1 ⊆ P.X s.unpair.2) := P.
    incl_computable
  have hr : Nat.Primrec (fun t => Nat.pair (nthCode t.unpair.1 n P.masterIdx) t.unpair
    .2) :=
    ((primrec_nthCode.comp (Nat.Primrec.left.pair
      ((Nat.Primrec.const n).pair (Nat.Primrec.const P.masterIdx)))).of_eq
        (fun t => by simp only [unpair_pair_fst, unpair_pair_snd])).pair Nat.Primrec.
    right
  refine (RecDecidable.of_iff (fun t => ?_) (hincl.comp hr)).re
  simp only [iterPresentation_X, projN_rel, fiber_iterEnum, iterIdx, unpair_pair_fst,
    unpair_pair_snd]
  exact ⟨fun h => h.2.2, fun h => ⟨iterEnum_mem _, P.mem_X _, h⟩⟩

end Iterate

section Smash

variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)

variable {P₀ P₁}

variable (P₀ P₁)

section SmashFunctor

variable {α' β' : Type*} {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'}

theorem smashMap_isComputable (P₀' : ComputablePresentation V₀') (P₁' :
    ComputablePresentation V₁')
    {f : ApproximableMap V₀ V₀'} {g : ApproximableMap V₁ V₁'}
    (hf : ComputableMapS P₀.toScott P₀'.toScott f)
    (hg : ComputableMapS P₁.toScott P₁'.toScott g) :
    ComputableMapS (smashPresentation P₀ P₁) (smashPresentation P₀' P₁') (smashMap f g)
     := by
  constructor
  obtain ⟨f₀, hf₀p, hf₀e⟩ := proper₀_dec P₀
```

```
obtain ⟨f₁, hf₁p, hf₁e⟩ := proper₁_dec P₁
set c₀ := fun n => isOne (f₀ n) with hc₀def
set c₁ := fun n => isOne (f₁ n) with hc₁def
have hc₀le : ∀ n, c₀ n ≤ 1 := fun n => isOne_le_one _
have hc₁le : ∀ n, c₁ n ≤ 1 := fun n => isOne_le_one _
have hc₀ : ∀ n, P₀.X n = V₀.master ↔ c₀ n = 1 := fun n => by
  rw [hc₀def, isOne_eq_one_iff]; exact hf₀e n
have hc₁ : ∀ n, P₁.X n = V₁.master ↔ c₁ n = 1 := fun n => by
  rw [hc₁def, isOne_eq_one_iff]; exact hf₁e n
have hc₀p : Nat.Primrec c₀ := primrec_isOne.comp hf₀p
have hc₁p : Nat.Primrec c₁ := primrec_isOne.comp hf₁p
have hpf : Nat.Primrec (fun n => c₀ n.unpair.1 * c₁ n.unpair.2) :=
  (primrec_mul.comp ((hc₀p.comp Nat.Primrec.left).pair (hc₁p.comp Nat.Primrec.right))
  ).of_eq
    (fun n => by simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd])
have heffLp : Nat.Primrec (fun n => selectFn (c₀ n.unpair.1 * c₁ n.unpair.2)
    n.unpair.1 P₀.masterIdx) :=
  primrec_selectFn hpf Nat.Primrec.left (Nat.Primrec.const _)
have heffRp : Nat.Primrec (fun n => selectFn (c₀ n.unpair.1 * c₁ n.unpair.2)
    n.unpair.2 P₁.masterIdx) :=
  primrec_selectFn hpf Nat.Primrec.right (Nat.Primrec.const _)

have Hf : REPred (fun t => f.rel (P₀.toScott.X
    (selectFn (c₀ t.unpair.1.unpair.1 * c₁ t.unpair.1.unpair.2)
      t.unpair.1.unpair.1 P₀.masterIdx)) (P₀'.toScott.X t.unpair.2.unpair.1)) :=
  REPred.of_iff (fun t => by simp only [unpair_pair_fst, unpair_pair_snd])
    (hf.out.comp ((heffLp.comp Nat.Primrec.left).pair
      (Nat.Primrec.left.comp Nat.Primrec.right)))
have Hg : REPred (fun t => g.rel (P₁.toScott.X
    (selectFn (c₀ t.unpair.1.unpair.1 * c₁ t.unpair.1.unpair.2)
      t.unpair.1.unpair.2 P₁.masterIdx)) (P₁'.toScott.X t.unpair.2.unpair.2)) :=
  REPred.of_iff (fun t => by simp only [unpair_pair_fst, unpair_pair_snd])
    (hg.out.comp ((heffRp.comp Nat.Primrec.left).pair
      (Nat.Primrec.right.comp Nat.Primrec.right)))
have hJP : RecDecidable (fun t => P₀'.X t.unpair.2.unpair.1 = V₀'.master ∧
    P₁'.X t.unpair.2.unpair.2 = V₁'.master) :=
  ((proper₀_dec P₀').comp (Nat.Primrec.left.comp Nat.Primrec.right)).and
    ((proper₁_dec P₁').comp (Nat.Primrec.right.comp Nat.Primrec.right))
refine REPred.of_iff (fun t => ?_) ((hJP.not.re).or (hJP.re.and (Hf.and Hg)))
show (smashMap f g).rel (smashEnum P₀ P₁ t.unpair.1) (smashEnum P₀' P₁' t.unpair.2) ↔
  _
have heq : smashEnum P₀ P₁ t.unpair.1 = prodNbhd
    (P₀.X (selectFn (c₀ t.unpair.1.unpair.1 * c₁ t.unpair.1.unpair.2)
      t.unpair.1.unpair.1 P₀.masterIdx))
    (P₁.X (selectFn (c₀ t.unpair.1.unpair.1 * c₁ t.unpair.1.unpair.2)
      t.unpair.1.unpair.2 P₁.masterIdx)) := smashEnum_eq_eff hc₀le hc₁le hc₀ hc₁ t.
  unpair.1
by_cases hJPm : P₀'.X t.unpair.2.unpair.1 = V₀'.master ∧ P₁'.X t.unpair.2.unpair.2 =
  V₁'.master
· constructor
  · rintro ⟨-, -, hd⟩
    rcases hd with hmaster | ⟨A, B, A', B', hWAB, hW'AB, -, -, hfr, hgr⟩
    · rw [smashEnum_proper hJPm] at hmaster
      exact absurd (prodNbhd_injective hmaster).1 hJPm.1
    · rw [smashEnum_proper hJPm] at hW'AB
      obtain ⟨rfl, rfl⟩ := prodNbhd_injective (heq.symm.trans hWAB)
```

```
        obtain ⟨rfl, rfl⟩ := prodNbhd_injective hW'AB
        exact Or.inr ⟨hJPm, hfr, hgr⟩
    · rintro (hnp | ⟨-, hfr, hgr⟩)
      · exact absurd hJPm hnp
      · exact ⟨smashEnum_mem (P₀ := P₀) (P₁ := P₁) t.unpair.1,
          smashEnum_mem (P₀ := P₀') (P₁ := P₁') t.unpair.2,
          Or.inr ⟨_, _, _, _, heq, smashEnum_proper hJPm, hJPm.1, hJPm.2, hfr, hgr⟩⟩
  · constructor
    · intro _; exact Or.inl hJPm
    · intro _
      exact ⟨smashEnum_mem (P₀ := P₀) (P₁ := P₁) t.unpair.1,
        smashEnum_mem (P₀ := P₀') (P₁ := P₁') t.unpair.2,
        Or.inl (smashEnum_master hJPm)⟩


end SmashFunctor

theorem smashPaired_isComputable {V₂ : NeighborhoodSystem ?} (P₂ :
    ComputablePresentation V₂)
    {a : ApproximableMap V₂ V₀} {b : ApproximableMap V₂ V₁}
    (ha : ComputableMapS P₂.toScott P₀.toScott a)
    (hb : ComputableMapS P₂.toScott P₁.toScott b) :
    ComputableMapS P₂.toScott (smashPresentation P₀ P₁) (smashPaired a b) := by
  constructor
  have Ha : REPred (fun t => a.rel (P₂.toScott.X t.unpair.1) (P₀.toScott.X t.unpair.2.
    unpair.1)) :=
    REPred.of_iff (fun t => by simp only [unpair_pair_fst, unpair_pair_snd])
      (ha.out.comp (Nat.Primrec.left.pair (Nat.Primrec.left.comp Nat.Primrec.right)))
  have Hb : REPred (fun t => b.rel (P₂.toScott.X t.unpair.1) (P₁.toScott.X t.unpair.2.
    unpair.2)) :=
    REPred.of_iff (fun t => by simp only [unpair_pair_fst, unpair_pair_snd])
      (hb.out.comp (Nat.Primrec.left.pair (Nat.Primrec.right.comp Nat.Primrec.right)))
  have hJP : RecDecidable (fun t => P₀.X t.unpair.2.unpair.1 = V₀.master ∧
      P₁.X t.unpair.2.unpair.2 = V₁.master) :=
    ((proper₀_dec P₀).comp (Nat.Primrec.left.comp Nat.Primrec.right)).and
      ((proper₁_dec P₁).comp (Nat.Primrec.right.comp Nat.Primrec.right))
  refine REPred.of_iff (fun t => ?_) ((hJP.not.re).or (hJP.re.and (Ha.and Hb)))
  show (smashPaired a b).rel (P₂.X t.unpair.1) (smashEnum P₀ P₁ t.unpair.2) ↔ _
  by_cases hJPm : P₀.X t.unpair.2.unpair.1 = V₀.master ∧ P₁.X t.unpair.2.unpair.2 = V₁.
    master
  · constructor
    · rintro ⟨-, -, hd⟩
      rcases hd with hmaster | ⟨A, B, hWAB, -, -, ha', hb'⟩
      · rw [smashEnum_proper hJPm] at hmaster
        exact absurd (prodNbhd_injective hmaster).1 hJPm.1
      · rw [smashEnum_proper hJPm] at hWAB
        obtain ⟨rfl, rfl⟩ := prodNbhd_injective hWAB
        exact Or.inr ⟨hJPm, ha', hb'⟩
    · rintro (hnp | ⟨-, ha', hb'⟩)
      · exact absurd hJPm hnp
      · exact ⟨P₂.mem_X _, smashEnum_mem (P₀ := P₀) (P₁ := P₁) _,
          Or.inr ⟨_, _, smashEnum_proper hJPm, hJPm.1, hJPm.2, ha', hb'⟩⟩
  · constructor
    · intro _; exact Or.inl hJPm
    · intro _
      exact ⟨P₂.mem_X _, smashEnum_mem (P₀ := P₀) (P₁ := P₁) _,
```

```
        Or.inl (smashEnum_master hJPm)⟩

theorem smashProj₀_isComputable :
    ComputableMapS (smashPresentation P₀ P₁) P₀.toScott (smashProj₀ V₀ V₁) := by
  constructor
  obtain ⟨f₀, hf₀p, hf₀e⟩ := proper₀_dec P₀
  obtain ⟨f₁, hf₁p, hf₁e⟩ := proper₁_dec P₁
  set c₀ := fun n => isOne (f₀ n) with hc₀def
  set c₁ := fun n => isOne (f₁ n) with hc₁def
  have hc₀le : ∀ n, c₀ n ≤ 1 := fun n => isOne_le_one _
  have hc₁le : ∀ n, c₁ n ≤ 1 := fun n => isOne_le_one _
  have hc₀ : ∀ n, P₀.X n = V₀.master ↔ c₀ n = 1 := fun n => by
    rw [hc₀def, isOne_eq_one_iff]; exact hf₀e n
  have hc₁ : ∀ n, P₁.X n = V₁.master ↔ c₁ n = 1 := fun n => by
    rw [hc₁def, isOne_eq_one_iff]; exact hf₁e n
  have hc₀p : Nat.Primrec c₀ := primrec_isOne.comp hf₀p
  have hc₁p : Nat.Primrec c₁ := primrec_isOne.comp hf₁p
  have hpf : Nat.Primrec (fun n => c₀ n.unpair.1 * c₁ n.unpair.2) :=
    (primrec_mul.comp ((hc₀p.comp Nat.Primrec.left).pair (hc₁p.comp Nat.Primrec.right))
    ).of_eq
      (fun n => by simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd])
  have heffLp : Nat.Primrec (fun n => selectFn (c₀ n.unpair.1 * c₁ n.unpair.2)
      n.unpair.1 P₀.masterIdx) :=
    primrec_selectFn hpf Nat.Primrec.left (Nat.Primrec.const _)
  have hincl : RecDecidable (fun s => P₀.X s.unpair.1 ⊆ P₀.X s.unpair.2) := P₀.
    incl_computable
  have hr : Nat.Primrec (fun t => Nat.pair
      (selectFn (c₀ t.unpair.1.unpair.1 * c₁ t.unpair.1.unpair.2) t.unpair.1.unpair.1 P
    ₀.masterIdx)
      t.unpair.2) := (heffLp.comp Nat.Primrec.left).pair Nat.Primrec.right
  refine (RecDecidable.of_iff (fun t => ?_) (hincl.comp hr)).re
  show (smashProj₀ V₀ V₁).rel (smashEnum P₀ P₁ t.unpair.1) (P₀.X t.unpair.2) ↔ _
  simp only [smashProj₀_rel, unpair_pair_fst, unpair_pair_snd]
  constructor
  · rintro ⟨-, -, hsub⟩
    rw [smashEnum_eq_eff hc₀le hc₁le hc₀ hc₁, inl_preimage_prodNbhd] at hsub
    exact hsub
  · intro h
    refine ⟨smashEnum_mem (P₀ := P₀) (P₁ := P₁) _, P₀.mem_X _, ?_⟩
    rw [smashEnum_eq_eff hc₀le hc₁le hc₀ hc₁, inl_preimage_prodNbhd]
    exact h

theorem smashProj₁_isComputable :
    ComputableMapS (smashPresentation P₀ P₁) P₁.toScott (smashProj₁ V₀ V₁) := by
  constructor
  obtain ⟨f₀, hf₀p, hf₀e⟩ := proper₀_dec P₀
  obtain ⟨f₁, hf₁p, hf₁e⟩ := proper₁_dec P₁
  set c₀ := fun n => isOne (f₀ n) with hc₀def
  set c₁ := fun n => isOne (f₁ n) with hc₁def
  have hc₀le : ∀ n, c₀ n ≤ 1 := fun n => isOne_le_one _
  have hc₁le : ∀ n, c₁ n ≤ 1 := fun n => isOne_le_one _
  have hc₀ : ∀ n, P₀.X n = V₀.master ↔ c₀ n = 1 := fun n => by
    rw [hc₀def, isOne_eq_one_iff]; exact hf₀e n
  have hc₁ : ∀ n, P₁.X n = V₁.master ↔ c₁ n = 1 := fun n => by
    rw [hc₁def, isOne_eq_one_iff]; exact hf₁e n
  have hc₀p : Nat.Primrec c₀ := primrec_isOne.comp hf₀p
```

```
  have hc₁p : Nat.Primrec c₁ := primrec_isOne.comp hf₁p
  have hpf : Nat.Primrec (fun n => c₀ n.unpair.1 * c₁ n.unpair.2) :=
    (primrec_mul.comp ((hc₀p.comp Nat.Primrec.left).pair (hc₁p.comp Nat.Primrec.right))
    ).of_eq
      (fun n => by simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd])
  have heffRp : Nat.Primrec (fun n => selectFn (c₀ n.unpair.1 * c₁ n.unpair.2)
      n.unpair.2 P₁.masterIdx) :=
    primrec_selectFn hpf Nat.Primrec.right (Nat.Primrec.const _)
  have hincl : RecDecidable (fun s => P₁.X s.unpair.1 ⊆ P₁.X s.unpair.2) := P₁.
    incl_computable
  have hr : Nat.Primrec (fun t => Nat.pair
      (selectFn (c₀ t.unpair.1.unpair.1 * c₁ t.unpair.1.unpair.2) t.unpair.1.unpair.2 P
    ₁.masterIdx)
      t.unpair.2) := (heffRp.comp Nat.Primrec.left).pair Nat.Primrec.right
  refine (RecDecidable.of_iff (fun t => ?_) (hincl.comp hr)).re
  show (smashProj₁ V₀ V₁).rel (smashEnum P₀ P₁ t.unpair.1) (P₁.X t.unpair.2) ↔ _
  simp only [smashProj₁_rel, unpair_pair_fst, unpair_pair_snd]
  constructor
  · rintro ⟨-, -, hsub⟩
    rw [smashEnum_eq_eff hc₀le hc₁le hc₀ hc₁, inr_preimage_prodNbhd] at hsub
    exact hsub
  · intro h
    refine ⟨smashEnum_mem (P₀ := P₀) (P₁ := P₁) _, P₁.mem_X _, ?_⟩
    rw [smashEnum_eq_eff hc₀le hc₁le hc₀ hc₁, inr_preimage_prodNbhd]
    exact h

theorem smash_isEffectivelyGivenS (h₀ : V₀.IsEffectivelyGiven) (h₁ : V₁.
    IsEffectivelyGiven) :
    (smash V₀ V₁).IsEffectivelyGivenS := by
  obtain ⟨Q₀⟩ := h₀; obtain ⟨Q₁⟩ := h₁
  exact ⟨smashPresentation Q₀ Q₁⟩

end Smash

end

section
set_option linter.unusedVariables false

theorem example_715.{u_1, u_2} : And
  (And
    (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α},
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven (Prod
     Nat α)
          (@DomainTheory.NeighbourhoodSystems.iterSys α V))
    (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      (h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
    V₀ X → @Set.Nonempty α X)
      (h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
    V₁ Y → @Set.Nonempty β Y),
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V₀ →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven β V₁
    →
```

```
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGivenS (
  Option (Sum α β))
         (@DomainTheory.NeighbourhoodSystems.osum α β V₀ V₁ h₀ h₁)))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V₀ →
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven β V₁ →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGivenS (Sum
   α β)
       (@DomainTheory.NeighbourhoodSystems.Exercise510.smash α β V₀ V₁)) :=
@And.intro
(And
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α},
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven (Prod
   Nat α)
       (@DomainTheory.NeighbourhoodSystems.iterSys α V))
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
  V₀ X → @Set.Nonempty α X)
    (h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
  V₁ Y → @Set.Nonempty β Y),
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V₀ →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven β V₁
  →
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGivenS (
  Option (Sum α β))
         (@DomainTheory.NeighbourhoodSystems.osum α β V₀ V₁ h₀ h₁)))
(∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β},
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V₀ →
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven β V₁ →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGivenS (Sum
   α β)
       (@DomainTheory.NeighbourhoodSystems.Exercise510.smash α β V₀ V₁))
(@And.intro
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α},
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven (Prod
   Nat α)
       (@DomainTheory.NeighbourhoodSystems.iterSys α V))
  (∀ {α : Type u_1} {β : Type u_2} {V₀ : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (h₀ : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
  V₀ X → @Set.Nonempty α X)
    (h₁ : ∀ (Y : Set β), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β
  V₁ Y → @Set.Nonempty β Y),
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α V₀ →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven β V₁
  →
       @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGivenS (
```

```
    Option (Sum α β))
             (@DomainTheory.NeighbourhoodSystems.osum α β V₀ V₁ h₀ h₁))
    @DomainTheory.NeighbourhoodSystems.iterSys_isEffectivelyGiven
    @DomainTheory.NeighbourhoodSystems.osum_isEffectivelyGivenS)
  @DomainTheory.NeighbourhoodSystems.smash_isEffectivelyGivenS
end

namespace Exercise718
open NeighborhoodSystem Domain.Recursive ApproximableMap

end Exercise718
end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 7.15. Finish the proof of 7.4 and establish similar results for the constructs $(D_0 \otimes D_1)$, $(D_0 \oplus D_1)$ and D^∞. Take into account the various appropriate combinators.

3.8.18 Exercise 7.16 — curry as an enumeration

Exercise_7_16.lean

```
module

public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Table_5_5

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_12

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α β ? : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
  {V₂ : NeighborhoodSystem ?}

theorem curryComb_rel_recDecidable
    (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)
    (P₂ : ComputablePresentation V₂) (gNa gNb gNc : ℕ → ℕ)
    (PA : ComputablePresentation (funSpace (prod V₀ V₁) V₂))
    (PB : ComputablePresentation (funSpace V₀ (funSpace V₁ V₂)))
    (Pc : ComputablePresentation (funSpace V₁ V₂))
    (hPAX : PA.X = Xenum (prodPresentation P₀ P₁) P₂ gNa)
    (hPBX : PB.X = Xenum P₀ Pc gNb)
    (hPcX : Pc.X = Xenum P₁ P₂ gNc)
    (hgNa : ∀ c, gNa c = 1 ↔
      (stepFun (funListOf (prodPresentation P₀ P₁) P₂ (decodeList c))
        : Set (ApproximableMap (prod V₀ V₁) V₂)).Nonempty)
    (hgNc : ∀ c, gNc c = 1 ↔
      (stepFun (funListOf P₁ P₂ (decodeList c)) : Set (ApproximableMap V₁ V₂)).Nonempty
    )
```

```
  (hgNbp : Nat.Primrec gNb) (hgNcp : Nat.Primrec gNc) :
  RecDecidable₂ (fun n m => (curryC V₀ V₁ V₂).rel (PA.X n) (PB.X m)) := by

have hcomb : ∀ n m, (curryC V₀ V₁ V₂).rel (PA.X n) (PB.X m) ↔
    (gNb m = 1 → ∀ e ∈ decodeList m, gNc e.unpair.2 = 1 →
      ∀ e' ∈ decodeList e.unpair.2, PA.X n ⊆ PA.X (curryStepCode e.unpair.1 e')) :=
  by
  intro n m
  have hstep1 : (curryC V₀ V₁ V₂).rel (PA.X n) (PB.X m) ↔
      curry (toApproxMap ((funSpace (prod V₀ V₁) V₂).principal (PA.mem_X n))) ∈ PB.X
  m := by
    constructor
    · rintro ⟨hG, hH⟩
      rw [curryIso_apply, mem_toFilter] at hH
      exact hH.2
    · intro h
      exact ⟨PA.mem_X n, by rw [curryIso_apply, mem_toFilter]; exact ⟨PB.mem_X m, h⟩⟩
  rw [hstep1, hPBX, mem_Xenum_iff_map P₀ Pc gNb
    (curry (toApproxMap ((funSpace (prod V₀ V₁) V₂).principal (PA.mem_X n)))) m]
  apply imp_congr_right; intro _
  apply forall_congr'; intro e
  apply imp_congr_right; intro _
  rw [hPcX, curry_rel_Xenum_iff P₀ P₁ P₂ gNc hgNc
    (toApproxMap ((funSpace (prod V₀ V₁) V₂).principal (PA.mem_X n))) e.unpair.1 e.
  unpair.2]
  apply imp_congr_right; intro _
  apply forall_congr'; intro e'
  apply imp_congr_right; intro _
  have hstepeq : step (prodNbhd (P₀.X e.unpair.1) (P₁.X e'.unpair.1)) (P₂.X e'.unpair
  .2)
      = PA.X (curryStepCode e.unpair.1 e') := by
    have hs := Xenum_singleton (prodPresentation P₀ P₁) P₂ gNa hgNa
      (Nat.pair e.unpair.1 e'.unpair.1) e'.unpair.2
    rw [prodPresentation_X, unpair_pair_fst, unpair_pair_snd] at hs
    rw [hPAX]; exact hs.symm
  rw [toApproxMap_rel, mem_principal, hstepeq]
  exact ⟨fun h => h.2, fun h => ⟨PA.mem_X _, h⟩⟩

have q1_dec : RecDecidable₂ (fun e' p =>
    PA.X p.unpair.1 ⊆ PA.X (curryStepCode p.unpair.2 e')) := by
  have hr : Nat.Primrec (fun w => Nat.pair w.unpair.2.unpair.1
      (curryStepCode w.unpair.2.unpair.2 w.unpair.1)) :=
    (Nat.Primrec.left.comp Nat.Primrec.right).pair
      (primrec_curryStepCode (Nat.Primrec.right.comp Nat.Primrec.right) Nat.Primrec.
  left)
  refine RecDecidable.of_iff (fun w => ?_) (RecDecidable.comp PA.incl_computable hr)
  simp only [unpair_pair_fst, unpair_pair_snd]
have dInner := q1_dec.bForallList
have dMid : RecDecidable₂ (fun e n =>
    gNc e.unpair.2 = 1 → ∀ e' ∈ decodeList e.unpair.2,
      PA.X n ⊆ PA.X (curryStepCode e.unpair.1 e')) := by
  have hg_mid : Nat.Primrec (fun s => Nat.pair s.unpair.1.unpair.2
      (Nat.pair s.unpair.2 s.unpair.1.unpair.1)) :=
    (Nat.Primrec.right.comp Nat.Primrec.left).pair
      (Nat.Primrec.right.pair (Nat.Primrec.left.comp Nat.Primrec.left))
  have B1 : RecDecidable (fun s => ∀ e' ∈ decodeList s.unpair.1.unpair.2,
```

```
        PA.X s.unpair.2 ⊆ PA.X (curryStepCode s.unpair.1.unpair.1 e')) := by
      refine RecDecidable.of_iff (fun s => ?_) (RecDecidable.comp dInner hg_mid)
      simp only [unpair_pair_fst, unpair_pair_snd]
    have guard1 : RecDecidable (fun s => gNc s.unpair.1.unpair.2 = 1) :=
      RecDecidable.natEq (hgNcp.comp (Nat.Primrec.right.comp Nat.Primrec.left))
        (Nat.Primrec.const 1)
    refine RecDecidable.of_iff (fun s => ?_) (guard1.not.or B1)
    exact Decidable.imp_iff_not_or
  have dOuter := dMid.bForallList
  refine RecDecidable.of_iff (fun t => hcomb t.unpair.1 t.unpair.2) ?_
  have hswap2 : Nat.Primrec (fun t => Nat.pair t.unpair.2 t.unpair.1) :=
    Nat.Primrec.right.pair Nat.Primrec.left
  have B2 : RecDecidable (fun t => ∀ e ∈ decodeList t.unpair.2, gNc e.unpair.2 = 1 →
      ∀ e' ∈ decodeList e.unpair.2, PA.X t.unpair.1 ⊆ PA.X (curryStepCode e.unpair.1 e
    ')) := by
    refine RecDecidable.of_iff (fun t => ?_) (RecDecidable.comp dOuter hswap2)
    simp only [unpair_pair_fst, unpair_pair_snd]
  have guard2 : RecDecidable (fun t => gNb t.unpair.2 = 1) :=
    RecDecidable.natEq (hgNbp.comp Nat.Primrec.right) (Nat.Primrec.const 1)
  refine RecDecidable.of_iff (fun t => ?_) (guard2.not.or B2)
  exact Decidable.imp_iff_not_or

theorem curryComb_isComputable
    (P₀ : ComputablePresentation V₀) (P₁ : ComputablePresentation V₁)
    (P₂ : ComputablePresentation V₂) :
    ∃ (PA : ComputablePresentation (funSpace (prod V₀ V₁) V₂))
      (PB : ComputablePresentation (funSpace V₀ (funSpace V₁ V₂))),
      RecDecidable₂ (fun n m => (curryC V₀ V₁ V₂).rel (PA.X n) (PB.X m)) ∧
        ComputableMap PA PB (curryC V₀ V₁ V₂) := by
  obtain ⟨incl0, hincl0p, hincl0s⟩ := P₀.incl_computable
  obtain ⟨fc0, hfc0p, hfc0s⟩ := P₀.cons_computable
  obtain ⟨incl1, hincl1p, hincl1s⟩ := P₁.incl_computable
  obtain ⟨fc1, hfc1p, hfc1s⟩ := P₁.cons_computable
  obtain ⟨incl2, hincl2p, hincl2s⟩ := P₂.incl_computable
  obtain ⟨eq2, heq2p, heq2s⟩ := P₂.eq_computable
  obtain ⟨fc2, hfc2p, hfc2s⟩ := P₂.cons_computable
  obtain ⟨inclpr, hinclprp, hinclprs⟩ := (prodPresentation P₀ P₁).incl_computable
  obtain ⟨fcpr, hfcprp, hfcprs⟩ := (prodPresentation P₀ P₁).cons_computable

  let Pc : ComputablePresentation (funSpace V₁ V₂) :=
    funPresentation P₁ P₂ (funConsChar P₁ P₂ fc1 fc2) incl1 incl2 eq2
      (funConsChar_spec P₁ P₂ fc1 fc2 (fun s => (hfc1s s).symm) (fun s => (hfc2s s).
    symm))
      (primrec_funConsChar P₁ P₂ fc1 fc2 hfc1p hfc2p)
      (fun s => (hincl1s s).symm) hincl1p (fun s => (hincl2s s).symm) hincl2p
      (fun s => (heq2s s).symm) heq2p
  obtain ⟨inclc, hinclcp, hinclcs⟩ := Pc.incl_computable
  obtain ⟨eqc, heqcp, heqcs⟩ := Pc.eq_computable
  obtain ⟨fcc, hfccp, hfccs⟩ := Pc.cons_computable

  let PA : ComputablePresentation (funSpace (prod V₀ V₁) V₂) :=
    funPresentation (prodPresentation P₀ P₁) P₂
      (funConsChar (prodPresentation P₀ P₁) P₂ fcpr fc2) inclpr incl2 eq2
      (funConsChar_spec (prodPresentation P₀ P₁) P₂ fcpr fc2
        (fun s => (hfcprs s).symm) (fun s => (hfc2s s).symm))
      (primrec_funConsChar (prodPresentation P₀ P₁) P₂ fcpr fc2 hfcprp hfc2p)
```

```
      (fun s => (hinclprs s).symm) hinclprp (fun s => (hincl2s s).symm) hincl2p
      (fun s => (heq2s s).symm) heq2p

  let PB : ComputablePresentation (funSpace V₀ (funSpace V₁ V₂)) :=
    funPresentation P₀ Pc (funConsChar P₀ Pc fc0 fcc) incl0 inclc eqc
      (funConsChar_spec P₀ Pc fc0 fcc (fun s => (hfc0s s).symm) (fun s => (hfccs s).
    symm))
      (primrec_funConsChar P₀ Pc fc0 fcc hfc0p hfccp)
      (fun s => (hincl0s s).symm) hincl0p (fun s => (hinclcs s).symm) hinclcp
      (fun s => (heqcs s).symm) heqcp
  have hRec : RecDecidable₂ (fun n m => (curryC V₀ V₁ V₂).rel (PA.X n) (PB.X m)) :=
    curryComb_rel_recDecidable P₀ P₁ P₂
      (funConsChar (prodPresentation P₀ P₁) P₂ fcpr fc2) (funConsChar P₀ Pc fc0 fcc)
      (funConsChar P₁ P₂ fc1 fc2) PA PB Pc rfl rfl rfl
      (funConsChar_spec (prodPresentation P₀ P₁) P₂ fcpr fc2
        (fun s => (hfcprs s).symm) (fun s => (hfc2s s).symm))
      (funConsChar_spec P₁ P₂ fc1 fc2 (fun s => (hfc1s s).symm) (fun s => (hfc2s s).
    symm))
      (primrec_funConsChar P₀ Pc fc0 fcc hfc0p hfccp)
      (primrec_funConsChar P₁ P₂ fc1 fc2 hfc1p hfc2p)
  exact ⟨PA, PB, hRec, ⟨hRec.re⟩⟩

theorem toApproxMap_principal_mem {G : Set (ApproximableMap V₀ V₁)}
    (hG : (funSpace V₀ V₁).mem G) : toApproxMap ((funSpace V₀ V₁).principal hG) ∈ G :=
    by
  obtain ⟨L, hL, rfl⟩ := hG.1
  intro p hp
  show (toApproxMap ((funSpace V₀ V₁).principal hG)).rel p.1 p.2
  rw [toApproxMap_rel, mem_principal]
  exact ⟨step_mem (hL p hp).1 (hL p hp).2, fun f hf => hf p hp⟩

theorem curryComb_rel {G : Set (ApproximableMap (prod V₀ V₁) V₂)}
    {H : Set (ApproximableMap V₀ (funSpace V₁ V₂))} :
    (curryC V₀ V₁ V₂).rel G H ↔ (funSpace (prod V₀ V₁) V₂).mem G ∧
      (funSpace V₀ (funSpace V₁ V₂)).mem H ∧ ∀ g ∈ G, curry g ∈ H := by
  constructor
  · rintro ⟨hG, hH⟩
    rw [curryIso_apply, mem_toFilter] at hH
    obtain ⟨hHmem, hcurry⟩ := hH
    refine ⟨hG, hHmem, fun g hg => ?_⟩
    have hle : toApproxMap ((funSpace (prod V₀ V₁) V₂).principal hG) ≤ g := by
      rw [ApproximableMap.le_iff]
      intro X Y hrel
      rw [toApproxMap_rel, mem_principal] at hrel
      exact hrel.2 hg
    have hcle : curry (toApproxMap ((funSpace (prod V₀ V₁) V₂).principal hG)) ≤ curry g
     :=
      (curryEquiv V₀ V₁ V₂).monotone hle
    exact funSpace_mem_up_closed hHmem hcurry hcle
  · rintro ⟨hG, hH, hall⟩
    refine ⟨hG, ?_⟩
    rw [curryIso_apply, mem_toFilter]
    exact ⟨hH, hall _ (toApproxMap_principal_mem hG)⟩

end
```

```
section
set_option linter.unusedVariables false

theorem example_716.{u_1, u_2, u_3} : And
  (And
    (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
   NeighbourhoodSystems.NeighborhoodSystem α}
      {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
      (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
      (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
      (P₂ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation ? V₂),
      ∃ (PA :
        @DomainTheory.NeighbourhoodSystems.ComputablePresentation
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
            (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
          (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
   NeighbourhoodSystems.prod α β V₀ V₁)
            V₂))
        (PB :
        @DomainTheory.NeighbourhoodSystems.ComputablePresentation
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
            (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
          (@DomainTheory.NeighbourhoodSystems.funSpace α (@DomainTheory.
   NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
            V₀ (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))),
        And
          (Domain.Recursive.RecDecidable₂ fun (n m : Nat) =>
            @DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
                (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
              (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ?
                (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
              (@DomainTheory.NeighbourhoodSystems.funSpace α
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
                (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
              (@DomainTheory.NeighbourhoodSystems.curryC α β ? V₀ V₁ V₂)
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                  (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
                (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ?
                  (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
                PA n)
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
                  (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
                (@DomainTheory.NeighbourhoodSystems.funSpace α
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
                  (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
                PB m))
          (@DomainTheory.NeighbourhoodSystems.ComputableMap
```

```
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
          (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
          (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
        (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
          V₂)
        (@DomainTheory.NeighbourhoodSystems.funSpace α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
          (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
        PA PB (@DomainTheory.NeighbourhoodSystems.curryC α β ? V₀ V₁ V₂)))
(∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
  {G :
    Set
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)}
  {H :
    Set
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))},
  Iff
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
      (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
        V₂)
      (@DomainTheory.NeighbourhoodSystems.funSpace α (@DomainTheory.
NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
        V₀ (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
      (@DomainTheory.NeighbourhoodSystems.curryC α β ? V₀ V₁ V₂) G H)
    (And
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
          (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
        (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
          V₂)
        G)
      (And
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
            (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
          (@DomainTheory.NeighbourhoodSystems.funSpace α
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
            (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
          H)
```

```
          (∀
            (g :
              @DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂),
              @Membership.mem
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                    (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
                  (Set
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                      (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂))
                  (@Set.instMembership
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                      (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂))
                  G g →
              @Membership.mem
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
                  (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
                (Set
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
                    (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)))
                (@Set.instMembership
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
                    (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)))
                H (@DomainTheory.NeighbourhoodSystems.curry α β ? V₀ V₁ V₂ g))))))
(∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
  NeighbourhoodSystems.NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
  (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
  (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
  (P₂ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation ? V₂) (gNa gNb gNc
  : Nat → Nat)
  (PA :
    @DomainTheory.NeighbourhoodSystems.ComputablePresentation
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
      (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
  NeighbourhoodSystems.prod α β V₀ V₁)
        V₂))
  (PB :
    @DomainTheory.NeighbourhoodSystems.ComputablePresentation
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
      (@DomainTheory.NeighbourhoodSystems.funSpace α (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)))
  (Pc :
    @DomainTheory.NeighbourhoodSystems.ComputablePresentation
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
      (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)),
  @Eq
      (Nat →
```

```
      Set
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
          (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂))
    (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
      (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
        V₂)
      PA)
    (@DomainTheory.NeighbourhoodSystems.Xenum (Sum α β) ? (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁) V₂
      (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁) P₂ gNa)
→
  @Eq
      (Nat →
        Set
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
            (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)))
      (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
          (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
        (@DomainTheory.NeighbourhoodSystems.funSpace α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
          (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
        PB)
      (@DomainTheory.NeighbourhoodSystems.Xenum α (@DomainTheory.
NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂) P₀ Pc gNb) →
    @Eq (Nat → Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂))
        (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
          (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂) Pc)
        (@DomainTheory.NeighbourhoodSystems.Xenum β ? V₁ V₂ P₁ P₂ gNc) →
      (∀ (c : Nat),
         Iff (@Eq Nat (gNa c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
nat_lit 1))))
           (@Set.Nonempty
             (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
               (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
             (@DomainTheory.NeighbourhoodSystems.stepFun (Sum α β) ?
               (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂
               (@DomainTheory.NeighbourhoodSystems.funListOf (Sum α β) ?
                 (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂
                 (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀
 P₁) P₂
                 (Domain.Recursive.decodeList c))))) →
       (∀ (c : Nat),
           Iff (@Eq Nat (gNc c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
nat_lit 1))))
           (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap β
 ? V₁ V₂)
             (@DomainTheory.NeighbourhoodSystems.stepFun β ? V₁ V₂
               (@DomainTheory.NeighbourhoodSystems.funListOf β ? V₁ V₂ P₁ P₂
```

```
                    (Domain.Recursive.decodeList c))))) →
            Nat.Primrec gNb →
              Nat.Primrec gNc →
                Domain.Recursive.RecDecidable₂ fun (n m : Nat) =>
                  @DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                      (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap α

                      (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
  V₀
                      (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
                    (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ?
                      (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
                    (@DomainTheory.NeighbourhoodSystems.funSpace α
                      (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
  V₀
                      (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
                    (@DomainTheory.NeighbourhoodSystems.curryC α β ? V₀ V₁ V₂)
                    (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
                      (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β)
  ?
                        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
                      (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ?
                        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
                      PA n)
                    (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
                      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
                        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂
  ) V₀
                        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
                      (@DomainTheory.NeighbourhoodSystems.funSpace α
                        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂
  ) V₀
                        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
                      PB m)) :=
@And.intro
(And
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
  NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
    (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
    (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
    (P₂ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation ? V₂),
    ∃ (PA :
      @DomainTheory.NeighbourhoodSystems.ComputablePresentation
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
          (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
        (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
  NeighbourhoodSystems.prod α β V₀ V₁)
          V₂))
      (PB :
      @DomainTheory.NeighbourhoodSystems.ComputablePresentation
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
```

```
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
      (@DomainTheory.NeighbourhoodSystems.funSpace α (@DomainTheory.
NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
        V₀ (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))),
    And
      (Domain.Recursive.RecDecidable₂ fun (n m : Nat) =>
       @DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
           (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
           (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
         (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ?
           (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
         (@DomainTheory.NeighbourhoodSystems.funSpace α
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
           (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
         (@DomainTheory.NeighbourhoodSystems.curryC α β ? V₀ V₁ V₂)
         (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
             (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
           (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ?
             (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
           PA n)
         (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
             (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
             (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
           (@DomainTheory.NeighbourhoodSystems.funSpace α
             (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
             (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
           PB m))
      (@DomainTheory.NeighbourhoodSystems.ComputableMap
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
          (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
          (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
        (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
          V₂)
        (@DomainTheory.NeighbourhoodSystems.funSpace α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
          (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
        PA PB (@DomainTheory.NeighbourhoodSystems.curryC α β ? V₀ V₁ V₂)))
 (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
   {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
   {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
   {G :
     Set
       (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
         (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)}
   {H :
     Set
       (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
```

```
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))},
  Iff
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
      (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
        V₂)
      (@DomainTheory.NeighbourhoodSystems.funSpace α (@DomainTheory.
NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
        V₀ (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
      (@DomainTheory.NeighbourhoodSystems.curryC α β ? V₀ V₁ V₂) G H)
    (And
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
          (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
        (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
          V₂)
        G)
      (And
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
            (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
          (@DomainTheory.NeighbourhoodSystems.funSpace α
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
            (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
          H)
        (∀
          (g :
            @DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
              (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂),
          @Membership.mem
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
              (Set
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                  (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂))
              (@Set.instMembership
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                  (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂))
              G g →
            @Membership.mem
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
                (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
              (Set
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
                  (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)))
              (@Set.instMembership
```

```
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
                  (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)))
              H (@DomainTheory.NeighbourhoodSystems.curry α β ? V₀ V₁ V₂ g))))))
(∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
 NeighbourhoodSystems.NeighborhoodSystem α}
 {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
 {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
 (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
 (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
 (P₂ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation ? V₂) (gNa gNb gNc
 : Nat → Nat)
 (PA :
   @DomainTheory.NeighbourhoodSystems.ComputablePresentation
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
       (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
     (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
 NeighbourhoodSystems.prod α β V₀ V₁)
       V₂))
 (PB :
   @DomainTheory.NeighbourhoodSystems.ComputablePresentation
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
       (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
       (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
     (@DomainTheory.NeighbourhoodSystems.funSpace α (@DomainTheory.
 NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
       (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)))
 (Pc :
   @DomainTheory.NeighbourhoodSystems.ComputablePresentation
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
     (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)),
 @Eq
     (Nat →
       Set
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
           (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂))
     (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
       (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
         (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
       (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
 NeighbourhoodSystems.prod α β V₀ V₁)
         V₂)
       PA)
     (@DomainTheory.NeighbourhoodSystems.Xenum (Sum α β) ? (@DomainTheory.
 NeighbourhoodSystems.prod α β V₀ V₁) V₂
       (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀ P₁) P₂ gNa)
 →
   @Eq
       (Nat →
         Set
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
             (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
             (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)))
       (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
```

```
          (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
        (@DomainTheory.NeighbourhoodSystems.funSpace α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
          (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
        PB)
      (@DomainTheory.NeighbourhoodSystems.Xenum α (@DomainTheory.
NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂) P₀ Pc gNb) →
    @Eq (Nat → Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂))
        (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
          (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂) Pc)
        (@DomainTheory.NeighbourhoodSystems.Xenum β ? V₁ V₂ P₁ P₂ gNc) →
      (∀ (c : Nat),
         Iff (@Eq Nat (gNa c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
nat_lit 1))))
           (@Set.Nonempty
             (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
               (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
             (@DomainTheory.NeighbourhoodSystems.stepFun (Sum α β) ?
               (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂
               (@DomainTheory.NeighbourhoodSystems.funListOf (Sum α β) ?
                 (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂
                 (@DomainTheory.NeighbourhoodSystems.prodPresentation α β V₀ V₁ P₀
 P₁) P₂
                 (Domain.Recursive.decodeList c))))) →
        (∀ (c : Nat),
         Iff (@Eq Nat (gNc c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (
nat_lit 1))))
           (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap β
 ? V₁ V₂)
             (@DomainTheory.NeighbourhoodSystems.stepFun β ? V₁ V₂
               (@DomainTheory.NeighbourhoodSystems.funListOf β ? V₁ V₂ P₁ P₂
                 (Domain.Recursive.decodeList c))))) →
          Nat.Primrec gNb →
            Nat.Primrec gNc →
              Domain.Recursive.RecDecidable₂ fun (n m : Nat) =>
                @DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                    (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
V₀
                    (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
                  (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ?
                    (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
                  (@DomainTheory.NeighbourhoodSystems.funSpace α
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
V₀
                    (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
                  (@DomainTheory.NeighbourhoodSystems.curryC α β ? V₀ V₁ V₂)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β)
?
                      (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
                    (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ?
```

```
                        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
                      PA n)
                    (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
                      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
                        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂
 ) V₀
                        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
                      (@DomainTheory.NeighbourhoodSystems.funSpace α
                        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂
 ) V₀
                        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
                      PB m))
(@And.intro
  (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
 NeighbourhoodSystems.NeighborhoodSystem α}
    {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
    (P₀ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V₀)
    (P₁ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β V₁)
    (P₂ : @DomainTheory.NeighbourhoodSystems.ComputablePresentation ? V₂),
    ∃ (PA :
      @DomainTheory.NeighbourhoodSystems.ComputablePresentation
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
          (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
        (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
 NeighbourhoodSystems.prod α β V₀ V₁)
          V₂))
      (PB :
      @DomainTheory.NeighbourhoodSystems.ComputablePresentation
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
          (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
        (@DomainTheory.NeighbourhoodSystems.funSpace α (@DomainTheory.
 NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
          V₀ (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))),
      And
        (Domain.Recursive.RecDecidable₂ fun (n m : Nat) =>
          @DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
              (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
              (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
            (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ?
              (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
            (@DomainTheory.NeighbourhoodSystems.funSpace α
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
              (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
            (@DomainTheory.NeighbourhoodSystems.curryC α β ? V₀ V₁ V₂)
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
              (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ?
                (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
              PA n)
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
```

```
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
              (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
            (@DomainTheory.NeighbourhoodSystems.funSpace α
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
              (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
            PB m))
      (@DomainTheory.NeighbourhoodSystems.ComputableMap
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
          (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
          (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
        (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
          V₂)
        (@DomainTheory.NeighbourhoodSystems.funSpace α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
          (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
        PA PB (@DomainTheory.NeighbourhoodSystems.curryC α β ? V₀ V₁ V₂)))
(∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V₀ : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
  {V₁ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {V₂ : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
  {G :
    Set
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)}
  {H :
    Set
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))},
  Iff
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
        (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
        (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
      (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
        V₂)
      (@DomainTheory.NeighbourhoodSystems.funSpace α (@DomainTheory.
NeighbourhoodSystems.ApproximableMap β ? V₁ V₂)
        V₀ (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
      (@DomainTheory.NeighbourhoodSystems.curryC α β ? V₀ V₁ V₂) G H)
    (And
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
          (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
        (@DomainTheory.NeighbourhoodSystems.funSpace (Sum α β) ? (@DomainTheory.
NeighbourhoodSystems.prod α β V₀ V₁)
          V₂)
        G)
      (And
```

```
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
                (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
              (@DomainTheory.NeighbourhoodSystems.funSpace α
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
                (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
              H)
            (∀
              (g :
                @DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                  (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂),
              @Membership.mem
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                    (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂)
                  (Set
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                      (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂))
                  (@Set.instMembership
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum α β) ?
                      (@DomainTheory.NeighbourhoodSystems.prod α β V₀ V₁) V₂))
                  G g →
                @Membership.mem
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
                    (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂))
                  (Set
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
                      (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
                      (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)))
                  (@Set.instMembership
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap α
                      (@DomainTheory.NeighbourhoodSystems.ApproximableMap β ? V₁ V₂) V₀
                      (@DomainTheory.NeighbourhoodSystems.funSpace β ? V₁ V₂)))
                  H (@DomainTheory.NeighbourhoodSystems.curry α β ? V₀ V₁ V₂ g)))))
    @DomainTheory.NeighbourhoodSystems.curryComb_isComputable @DomainTheory.
    NeighbourhoodSystems.curryComb_rel)
  @DomainTheory.NeighbourhoodSystems.curryComb_rel_recDecidable
end

end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 7.16. Let $D_0 = \{X_n \mid n \in \mathbf{N}\}$, $D_1 = \{Y_m \mid m \in \mathbf{N}\}$ and $D_2 = \{Z_k \mid k \in \mathbf{N}\}$ be three effectively given domains. Complete the proof of 7.5 by writing out curry as a relation between neighbourhoods. Is it a recursive set or only a recursively enumerable set?

3.8.19 Exercise 7.17 — recursion over lists

Exercise_7_17.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
```

```
@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive Example61
open NeighborhoodSystem Domain.Recursive ApproximableMap
open NeighborhoodSystem Domain.Recursive ApproximableMap Example61
section
variable {α : Type*}
namespace Proposition77
variable {D : NeighborhoodSystem α} (hD : ∀ X, D.mem X → X.Nonempty)

theorem pairSharp_isComputable (P : ComputablePresentation D) :
    ComputableMap (prodPresentation (dsharpPresentation P hD) (dsharpPresentation P hD
    ))
      (dsharpPresentation P hD) (pairSharpMap hD) := by
  constructor
  show REPred (fun s => (pairSharpMap hD).rel
    ((prodPresentation (dsharpPresentation P hD) (dsharpPresentation P hD)).X s.unpair
    .1)
    ((dsharpPresentation P hD).X s.unpair.2))
  have hincl : RecDecidable (fun s => Vsharp D P s.unpair.1 ⊆ Vsharp D P s.unpair.2)
    :=
    (dsharpPresentation P hD).incl_computable
  have hr : Nat.Primrec (fun s => Nat.pair (2 * s.unpair.1 + 2) s.unpair.2) :=
    (primrec_add₂ (primrec_mul₂ (Nat.Primrec.const 2) Nat.Primrec.left)
      (Nat.Primrec.const 2)).pair Nat.Primrec.right
  refine (RecDecidable.of_iff (fun s => ?_) (hincl.comp hr)).re
  simp only [unpair_pair_fst, unpair_pair_snd]
  rw [pairSharp_rel_Vsharp_iff hD P s.unpair.1 s.unpair.2]

theorem proj1_rel_Vsharp_iff (P : ComputablePresentation D) (m k : ℕ) :
    (proj1Map hD).rel (Vsharp D P m) (Vsharp D P k) ↔
      k = 0 ∨ (m % 2 = 0 ∧ m = 0 ∧ Vsharp D P (m / 2 - 1).unpair.2 ⊆ Vsharp D P k) :=
    by
  rw [proj1Map_rel, and_iff_right (Vsharp_mem P m), and_iff_right (Vsharp_mem P k)]
  refine or_congr (Vsharp_eq_Gamma_iff P hD k) ?_
  rcases nat_shape m with rfl | ⟨a, rfl⟩ | ⟨a, rfl⟩
  · rw [Vsharp_zero]
    constructor
    · rintro ⟨Pp, Qq, heq, -⟩; exact absurd heq.symm (embPair_ne_Gamma D hD Pp Qq)
    · rintro ⟨-, hne, -⟩; exact absurd rfl hne
  · rw [Vsharp_odd]
    constructor
    · rintro ⟨Pp, Qq, heq, -⟩; exact absurd heq (embZero_ne_embPair D hD (P.mem_X a) Pp
    Qq)
    · rintro ⟨hmod, -, -⟩; exact absurd hmod (by omega)
  · rw [Vsharp_even, show (2 * a + 2) / 2 - 1 = a from by omega]
    constructor
    · rintro ⟨Pp, Qq, heq, hQk⟩
      obtain ⟨-, hQ⟩ := embPair_injective heq
      exact ⟨by omega, by omega, by rw [hQ]; exact hQk⟩
    · rintro ⟨-, -, hsub⟩
      exact ⟨Vsharp D P a.unpair.1, Vsharp D P a.unpair.2, rfl, hsub⟩
```

```
theorem proj1_isComputable (P : ComputablePresentation D) :
    ComputableMap (dsharpPresentation P hD) (dsharpPresentation P hD) (proj1Map hD) :=
     by
  constructor
  show REPred (fun s => (proj1Map hD).rel (Vsharp D P s.unpair.1) (Vsharp D P s.unpair
    .2))
  have hk0 : RecDecidable (fun s => s.unpair.2 = 0) :=
    RecDecidable.natEq Nat.Primrec.right (Nat.Primrec.const 0)
  have hmod : RecDecidable (fun s => s.unpair.1 % 2 = 0) :=
    RecDecidable.natEq (primrec_mod2.comp Nat.Primrec.left) (Nat.Primrec.const 0)
  have hne : RecDecidable (fun s => s.unpair.1 = 0) :=
    (RecDecidable.natEq Nat.Primrec.left (Nat.Primrec.const 0)).not
  have hg : Nat.Primrec (fun s => Nat.pair (s.unpair.1 / 2 - 1).unpair.2 s.unpair.2)
    :=
    (Nat.Primrec.right.comp (primrec_sub₂ (primrec_div2.comp Nat.Primrec.left)
      (Nat.Primrec.const 1))).pair Nat.Primrec.right
  have hincl : RecDecidable (fun s => Vsharp D P (s.unpair.1 / 2 - 1).unpair.2 ⊆
     Vsharp D P s.unpair.2) := by
    refine RecDecidable.of_iff (fun s => ?_) ((dsharpPresentation P hD).
    incl_computable.comp hg)
    simp only [dsharpPresentation_X, unpair_pair_fst, unpair_pair_snd]
  exact (RecDecidable.of_iff (fun s => proj1_rel_Vsharp_iff hD P s.unpair.1 s.unpair
    .2)
    (hk0.or (hmod.and (hne.and hincl)))).re

end Proposition77
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Proposition77
section
set_option linter.unusedVariables false

theorem example_717.{u_1} : And
  (∀ {α : Type u_1} {D : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (hD : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α D
     X → @Set.Nonempty α X)
    (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α D),
    @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum (Prod (List Bool) α) (Prod (
    List Bool) α))
      (Prod (List Bool) α)
      (@DomainTheory.NeighbourhoodSystems.prod (Prod (List Bool) α) (Prod (List Bool)
    α)
        (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD)
        (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD))
      (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD)
      (@DomainTheory.NeighbourhoodSystems.prodPresentation (Prod (List Bool) α) (Prod
    (List Bool) α)
        (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD)
        (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD)
        (@DomainTheory.NeighbourhoodSystems.Proposition77.dsharpPresentation α D P hD)
        (@DomainTheory.NeighbourhoodSystems.Proposition77.dsharpPresentation α D P hD)
    )
      (@DomainTheory.NeighbourhoodSystems.Proposition77.dsharpPresentation α D P hD)
      (@DomainTheory.NeighbourhoodSystems.Proposition77.pairSharpMap α D hD))
  (∀ {α : Type u_1} {D : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
```

```
    (hD : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α D
     X → @Set.Nonempty α X)
    (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α D),
    @DomainTheory.NeighbourhoodSystems.ComputableMap (Prod (List Bool) α) (Prod (List
    Bool) α)
      (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD)
      (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD)
      (@DomainTheory.NeighbourhoodSystems.Proposition77.dsharpPresentation α D P hD)
      (@DomainTheory.NeighbourhoodSystems.Proposition77.dsharpPresentation α D P hD)
      (@DomainTheory.NeighbourhoodSystems.Proposition77.proj1Map α D hD)) :=
  @And.intro
  (∀ {α : Type u_1} {D : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (hD : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α D
     X → @Set.Nonempty α X)
    (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α D),
    @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum (Prod (List Bool) α) (Prod (
    List Bool) α))
      (Prod (List Bool) α)
      (@DomainTheory.NeighbourhoodSystems.prod (Prod (List Bool) α) (Prod (List Bool)
    α)
        (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD)
        (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD))
      (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD)
      (@DomainTheory.NeighbourhoodSystems.prodPresentation (Prod (List Bool) α) (Prod
    (List Bool) α)
        (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD)
        (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD)
        (@DomainTheory.NeighbourhoodSystems.Proposition77.dsharpPresentation α D P hD)
        (@DomainTheory.NeighbourhoodSystems.Proposition77.dsharpPresentation α D P hD)
    )
      (@DomainTheory.NeighbourhoodSystems.Proposition77.dsharpPresentation α D P hD)
      (@DomainTheory.NeighbourhoodSystems.Proposition77.pairSharpMap α D hD))
  (∀ {α : Type u_1} {D : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (hD : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α D
     X → @Set.Nonempty α X)
    (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α D),
    @DomainTheory.NeighbourhoodSystems.ComputableMap (Prod (List Bool) α) (Prod (List
    Bool) α)
      (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD)
      (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD)
      (@DomainTheory.NeighbourhoodSystems.Proposition77.dsharpPresentation α D P hD)
      (@DomainTheory.NeighbourhoodSystems.Proposition77.dsharpPresentation α D P hD)
      (@DomainTheory.NeighbourhoodSystems.Proposition77.proj1Map α D hD))
  @DomainTheory.NeighbourhoodSystems.Proposition77.pairSharp_isComputable
  @DomainTheory.NeighbourhoodSystems.Proposition77.proj1_isComputable
end

end DomainTheory.NeighbourhoodSystems.Proposition77
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem Domain.Recursive ApproximableMap Example61
variable {α : Type*}

namespace Proposition77

variable {D : NeighborhoodSystem α} (hD : ∀ X, D.mem X → X.Nonempty)
```

```
theorem proj1_toElementMap_pairSharp (x y : (Dsharp D hD).Element) :
    (proj1Map hD).toElementMap (pairSharp D hD x y) = y := by
  apply Element.ext
  intro Z
  simp only [ApproximableMap.mem_toElementMap, proj1Map_rel]
  constructor
  · rintro ⟨W, hWmem, hMW, hMZ, hdisj⟩
    rcases hWmem with rfl | ⟨Pp, Qq, hxP, hyQ, rfl⟩
    · rcases hdisj with rfl | ⟨Pp', Qq', hPe, -⟩
      · exact y.master_mem
      · exact absurd hPe.symm (embPair_ne_Gamma D hD Pp' Qq')
    · rcases hdisj with rfl | ⟨Pp', Qq', hPe, hQ'Z⟩
      · exact y.master_mem
      · obtain ⟨-, hQQ⟩ := embPair_injective hPe
        exact y.up_mem hyQ hMZ (by rw [hQQ]; exact hQ'Z)
  · intro hyZ
    exact ⟨embPair (Gamma D) Z, Or.inr ⟨Gamma D, Z, x.master_mem, hyZ, rfl⟩,
      MemS.pair MemS.gamma (y.sub hyZ), y.sub hyZ, Or.inr ⟨Gamma D, Z, rfl, subset_rfl⟩
    ⟩

end Proposition77
end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap Example61 Exercise510
    Proposition77
variable {α β : Type*} {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}

namespace Exercise717

inductive GRel (u : ApproximableMap D E) (v : ApproximableMap (prod E E) E) :
    Set (List Bool × α) → Set β → Prop
  | gamma {Z} : Z = E.master → GRel u v (Gamma D) Z
  | leaf {X Z} : u.rel X Z → GRel u v (embZero X) Z
  | node {P Q Z₁ Z₂ Z} : GRel u v P Z₁ → GRel u v Q Z₂ →
      v.rel (prodNbhd Z₁ Z₂) Z → GRel u v (embPair P Q) Z

end Exercise717
end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap Example61 Exercise510
    Proposition77
variable {α β : Type*} {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}

namespace Exercise717

variable {u : ApproximableMap D E} {v : ApproximableMap (prod E E) E}

theorem embZero_ne_embPair_of_memS (hD : ∀ X, D.mem X → X.Nonempty)
    {X : Set α} {P Q : Set (List Bool × α)} (hP : MemS D P) :
    embZero X = embPair P Q := by
  intro h
  obtain ⟨z, hz⟩ := embPair_nonempty (memS_nonempty hD hP) (Q := Q)
  have hz0 : z ∈ embZero X := h ▸ hz
```

```
  have hpath : z.1 = [] := hz0.1
  rcases hz with ⟨p', hp', -⟩ | ⟨q', hq', -⟩
  · rw [hp'] at hpath; simp at hpath
  · rw [hq'] at hpath; simp at hpath

theorem gRel_cod {W Z} (h : GRel u v W Z) : E.mem Z := by
  induction h with
  | gamma hZ => exact hZ ▸ E.master_mem
  | leaf hrel => exact u.rel_cod hrel
  | node _ _ hvrel _ _ => exact v.rel_cod hvrel

theorem gRel_dom {W Z} (h : GRel u v W Z) : MemS D W := by
  induction h with
  | gamma _ => exact MemS.gamma
  | leaf hrel => exact MemS.zero (u.rel_dom hrel)
  | node _ _ _ ihP ihQ => exact MemS.pair ihP ihQ

theorem gRel_embPair_inv (hD : ∀ X, D.mem X → X.Nonempty) {P Q : Set (List Bool × α)}
    {Z}
    (h : GRel u v (embPair P Q) Z) :
    ∃ Z₁ Z₂, GRel u v P Z₁ ∧ GRel u v Q Z₂ ∧ v.rel (prodNbhd Z₁ Z₂) Z := by
  have hPQ := gRel_dom h
  obtain ⟨hPmem, hQmem⟩ := memS_embPair_inv hD hPQ
  generalize hW : embPair P Q = W at h
  cases h with
  | gamma hZ => exact absurd hW (embPair_ne_Gamma D hD P Q)
  | @leaf X Z hrel => exact absurd hW.symm (embZero_ne_embPair_of_memS hD hPmem)
  | @node P' Q' Z₁ Z₂ Z hP' hQ' hvrel =>
      obtain ⟨rfl, rfl⟩ := embPair_injective hW
      exact ⟨Z₁, Z₂, hP', hQ', hvrel⟩

theorem gRel_embZero_inv (hD : ∀ X, D.mem X → X.Nonempty) {X : Set α} {Z}
    (h : GRel u v (embZero X) Z) : u.rel X Z := by
  generalize hW : embZero X = W at h
  cases h with
  | gamma hZ => exact absurd hW (embZero_ne_Gamma D hD X)
  | @leaf X' Z' hrel => rw [embZero_injective hW]; exact hrel
  | @node P Q Z₁ Z₂ Z hP hQ hvrel =>
      exact absurd hW (embZero_ne_embPair_of_memS hD (gRel_dom hP))

theorem gRel_gamma_inv (hD : ∀ X, D.mem X → X.Nonempty) {Z}
    (h : GRel u v (Gamma D) Z) : Z = E.master := by
  generalize hW : Gamma D = W at h
  cases h with
  | gamma hZ => exact hZ
  | @leaf X Z hrel => exact absurd hW.symm (embZero_ne_Gamma D hD X)
  | @node P Q Z₁ Z₂ Z hP hQ hvrel => exact absurd hW.symm (embPair_ne_Gamma D hD P Q)

theorem gRel_interRight (hD : ∀ X, D.mem X → X.Nonempty) {W Z} (h : GRel u v W Z) :
    ∀ {Z'}, GRel u v W Z' → GRel u v W (Z ∩ Z') := by
  induction h with
  | @gamma Z hZ =>
      intro Z' h'
      subst hZ
      have hZ' := gRel_gamma_inv hD h'
      subst hZ'
```

```
      rw [Set.inter_self]
      exact GRel.gamma rfl
  | @leaf X Z hrel =>
      intro Z' h'
      exact GRel.leaf (u.inter_right hrel (gRel_embZero_inv hD h'))
  | @node P Q Z₁ Z₂ Z hP hQ hvrel ihP ihQ =>
      intro Z' h'
      obtain ⟨Z₁', Z₂', hP', hQ', hv'⟩ := gRel_embPair_inv hD h'
      have hgP : GRel u v P (Z₁ ∩ Z₁') := ihP hP'
      have hgQ : GRel u v Q (Z₂ ∩ Z₂') := ihQ hQ'
      refine GRel.node hgP hgQ ?_
      have hmem : (prod E E).mem (prodNbhd (Z₁ ∩ Z₁') (Z₂ ∩ Z₂')) :=
        prod_mem_prodNbhd (gRel_cod hgP) (gRel_cod hgQ)
      have hv1 : v.rel (prodNbhd (Z₁ ∩ Z₁') (Z₂ ∩ Z₂')) Z :=
        v.mono hvrel (prodNbhd_subset_iff.mpr ⟨Set.inter_subset_left, Set.
    inter_subset_left⟩)
          subset_rfl hmem (v.rel_cod hvrel)
      have hv2 : v.rel (prodNbhd (Z₁ ∩ Z₁') (Z₂ ∩ Z₂')) Z' :=
        v.mono hv' (prodNbhd_subset_iff.mpr ⟨Set.inter_subset_right, Set.
    inter_subset_right⟩)
          subset_rfl hmem (v.rel_cod hv')
      exact v.inter_right hv1 hv2

theorem gRel_master : ∀ {W}, MemS D W → GRel u v W E.master := by
  intro W hW
  induction hW with
  | gamma => exact GRel.gamma rfl
  | @zero X hX =>
      exact GRel.leaf ((u.rel_iff_mem_principal hX).mpr (u.toElementMap _).master_mem)
  | @pair P Q _ _ ihP ihQ =>
      refine GRel.node ihP ihQ ?_
      have h := v.master_rel
      rwa [prod_master] at h

theorem gRel_mono (hD : ∀ X, D.mem X → X.Nonempty) {W Z} (h : GRel u v W Z) :
    ∀ {W' Z'}, W' ⊆ W → Z ⊆ Z' → MemS D W' → E.mem Z' → GRel u v W' Z' := by
  induction h with
  | @gamma Z hZ =>
      intro W' Z' hW'W hZZ' hW'mem hZ'mem
      subst hZ
      have hZ' : Z' = E.master := Set.Subset.antisymm (E.sub_master hZ'mem) hZZ'
      subst hZ'
      exact gRel_master hW'mem
  | @leaf X Z hrel =>
      intro W' Z' hW'W hZZ' hW'mem hZ'mem
      obtain ⟨X', hX'mem, rfl⟩ := memS_sub_embZero hD hW'mem hW'W
      exact GRel.leaf (u.mono hrel (embZero_subset.mp hW'W) hZZ' hX'mem hZ'mem)
  | @node P Q Z₁ Z₂ Z hP hQ hvrel ihP ihQ =>
      intro W' Z' hW'W hZZ' hW'mem hZ'mem
      obtain ⟨P', Q', hP'mem, hQ'mem, rfl⟩ := memS_sub_embPair hD hW'mem hW'W
      obtain ⟨hP'P, hQ'Q⟩ := embPair_subset.mp hW'W
      refine GRel.node (ihP hP'P subset_rfl hP'mem (gRel_cod hP))
        (ihQ hQ'Q subset_rfl hQ'mem (gRel_cod hQ)) ?_
      exact v.mono hvrel subset_rfl hZZ'
        (prod_mem_prodNbhd (gRel_cod hP) (gRel_cod hQ)) hZ'mem
```

```
def gMap (u : ApproximableMap D E) (v : ApproximableMap (prod E E) E)
    (hD : ∀ X, D.mem X → X.Nonempty) : ApproximableMap (Dsharp D hD) E where
  rel := GRel u v
  rel_dom h := gRel_dom h
  rel_cod h := gRel_cod h
  master_rel := GRel.gamma rfl
  inter_right h h' := gRel_interRight hD h h'
  mono h hsub hsup hX' hY' := gRel_mono hD h hsub hsup hX' hY'

@[simp] theorem gMap_rel {hD : ∀ X, D.mem X → X.Nonempty} {W : Set (List Bool × α)} {
    Z : Set β} :
    (gMap u v hD).rel W Z ↔ GRel u v W Z := Iff.rfl

section Computability

variable (fe fU fV : ℕ → ℕ) (mIdx : ℕ)

def gStep (p : ℕ) : ℕ :=
  let w := p.unpair.1
  let tbl := p.unpair.2
  let nn := w.unpair.1
  let cert := w.unpair.2
  let out := cert.unpair.1
  let wit := cert.unpair.2.unpair.1
  let lcert := cert.unpair.2.unpair.2.unpair.1
  let rcert := cert.unpair.2.unpair.2.unpair.2
  let b := nn / 2 - 1
  let childL := listGet tbl (w - 1 - Nat.pair b.unpair.1 lcert)
  let childR := listGet tbl (w - 1 - Nat.pair b.unpair.2 rcert)
  selectFn (1 - nn)
    (Nat.pair (fe (Nat.pair out mIdx)) out)
    (selectFn (nn % 2)
      (Nat.pair (fU (Nat.pair wit (Nat.pair (nn / 2) out))) out)
      (Nat.pair (childL.unpair.1 * childR.unpair.1
          * fV (Nat.pair wit (Nat.pair (Nat.pair childL.unpair.2 childR.unpair.2) out)
    )) out))

def gEval : ℕ → ℕ := gOf (gStep fe fU fV mIdx)

theorem gEval_pair (n cert : ℕ) :
    gEval fe fU fV mIdx (Nat.pair n cert)
      = gStep fe fU fV mIdx
          (Nat.pair (Nat.pair n cert) (rtbl (gStep fe fU fV mIdx) (Nat.pair n cert)))
    := by
  rw [gEval, gOf_def]

end Computability

theorem gMap_in (hD : ∀ X, D.mem X → X.Nonempty) (x : D.Element) :
    (gMap u v hD).toElementMap (inSharp D hD x) = u.toElementMap x := by
  apply Element.ext
  intro Z
  simp only [mem_toElementMap, gMap_rel]
  constructor
  · rintro ⟨W, hWmem, hrel⟩
    rcases hWmem with rfl | ⟨X, hXx, rfl⟩
```

```
    · have hZ := gRel_gamma_inv hD hrel; subst hZ
      exact ⟨D.master, x.master_mem, u.master_rel⟩
    · exact ⟨X, hXx, gRel_embZero_inv hD hrel⟩
  · rintro ⟨X, hXx, hrel⟩
    exact ⟨embZero X, Or.inr ⟨X, hXx, rfl⟩, GRel.leaf hrel⟩

theorem gMap_pair (hD : ∀ X, D.mem X → X.Nonempty) (y z : (Dsharp D hD).Element) :
    (gMap u v hD).toElementMap (pairSharp D hD y z)
      = v.toElementMap (pair ((gMap u v hD).toElementMap y) ((gMap u v hD).
    toElementMap z)) := by
  apply Element.ext
  intro Z
  simp only [mem_toElementMap, gMap_rel]
  constructor
  · rintro ⟨W, hWmem, hrel⟩
    rcases hWmem with rfl | ⟨P, Q, hPy, hQz, rfl⟩
    · have hZ := gRel_gamma_inv hD hrel; subst hZ
      exact ⟨(prod E E).master, (pair _ _).master_mem, v.master_rel⟩
    · obtain ⟨Z₁, Z₂, hP1, hQ2, hvrel⟩ := gRel_embPair_inv hD hrel
      exact ⟨prodNbhd Z₁ Z₂,
        mem_pair.mpr ⟨Z₁, Z₂, ⟨P, hPy, hP1⟩, ⟨Q, hQz, hQ2⟩, rfl⟩, hvrel⟩
  · rintro ⟨V, hVmem, hvrel⟩
    obtain ⟨Z₁, Z₂, ⟨P, hPy, hP1⟩, ⟨Q, hQz, hQ2⟩, rfl⟩ := mem_pair.mp hVmem
    exact ⟨embPair P Q, Or.inr ⟨P, Q, hPy, hQz, rfl⟩, GRel.node hP1 hQ2 hvrel⟩

theorem gMap_strict (hD : ∀ X, D.mem X → X.Nonempty) :
    IsStrict (gMap u v hD) := fun _ h => gRel_gamma_inv hD h

section Computability

variable (fe fU fV : ℕ → ℕ) (mIdx : ℕ)

theorem gStep_gamma (cert tbl : ℕ) :
    gStep fe fU fV mIdx (Nat.pair (Nat.pair 0 cert) tbl)
      = Nat.pair (fe (Nat.pair cert.unpair.1 mIdx)) cert.unpair.1 := by
  simp only [gStep, unpair_pair_fst, unpair_pair_snd, Nat.sub_zero, selectFn_one]

theorem gStep_leaf (a cert tbl : ℕ) :
    gStep fe fU fV mIdx (Nat.pair (Nat.pair (2 * a + 1) cert) tbl)

      = Nat.pair (fU (Nat.pair cert.unpair.2.unpair.1 (Nat.pair a cert.unpair.1)))
          cert.unpair.1 := by
  simp only [gStep, unpair_pair_fst, unpair_pair_snd]
  rw [show (1 : ℕ) - (2 * a + 1) = 0 by omega, selectFn_zero,
    show (2 * a + 1) % 2 = 1 by omega, selectFn_one, show (2 * a + 1) / 2 = a by omega
    ]

theorem gStep_node (a cert tbl : ℕ) :
    gStep fe fU fV mIdx (Nat.pair (Nat.pair (2 * a + 2) cert) tbl)
      = Nat.pair
          ((listGet tbl (Nat.pair (2 * a + 2) cert - 1
                - Nat.pair a.unpair.1 cert.unpair.2.unpair.2.unpair.1)).unpair.1
            * (listGet tbl (Nat.pair (2 * a + 2) cert - 1
                - Nat.pair a.unpair.2 cert.unpair.2.unpair.2.unpair.2)).unpair.1
            * fV (Nat.pair cert.unpair.2.unpair.1
                (Nat.pair (Nat.pair
```

```
                    (listGet tbl (Nat.pair (2 * a + 2) cert - 1
                      - Nat.pair a.unpair.1 cert.unpair.2.unpair.2.unpair.1)).unpair.2
                    (listGet tbl (Nat.pair (2 * a + 2) cert - 1
                      - Nat.pair a.unpair.2 cert.unpair.2.unpair.2.unpair.2)).unpair
    .2)
                cert.unpair.1)))
          cert.unpair.1 := by
  simp only [gStep, unpair_pair_fst, unpair_pair_snd]
  rw [show (1 : ℕ) - (2 * a + 2) = 0 by omega, selectFn_zero,
    show (2 * a + 2) % 2 = 0 by omega, selectFn_zero, show (2 * a + 2) / 2 - 1 = a by
    omega]

theorem gEval_out (n cert : ℕ) :
    (gEval fe fU fV mIdx (Nat.pair n cert)).unpair.2 = cert.unpair.1 := by
  rw [gEval_pair]
  rcases nat_shape n with rfl | ⟨a, rfl⟩ | ⟨a, rfl⟩
  · rw [gStep_gamma, unpair_pair_snd]
  · rw [gStep_leaf, unpair_pair_snd]
  · rw [gStep_node, unpair_pair_snd]

theorem listGet_rtbl_gEval {w' w : ℕ} (h : w' < w) :
    listGet (rtbl (gStep fe fU fV mIdx) w) (w - 1 - w') = gEval fe fU fV mIdx w' :=
  listGet_rtbl (gStep fe fU fV mIdx) h

end Computability

theorem pair_le_pair_right {a b d : ℕ} (h : b ≤ d) : Nat.pair a b ≤ Nat.pair a d := by
  unfold Nat.pair
  rcases Nat.lt_or_ge a b with hab | hab
  · rw [ite_eq_left hab, ite_eq_left (lt_of_lt_of_le hab h)]
    have : b * b ≤ d * d := Nat.mul_le_mul h h
    omega
  · rw [ite_eq_right (Nat.not_lt.mpr hab)]
    rcases Nat.lt_or_ge a d with had | had
    · rw [ite_eq_left had]
      have h1 : a * a + a ≤ d * d := by
        calc a * a + a = a * (a + 1) := by ring
          _ ≤ a * d := Nat.mul_le_mul (le_refl a) had
          _ ≤ d * d := Nat.mul_le_mul had.le (le_refl d)
      omega
    · rw [ite_eq_right (Nat.not_lt.mpr had)]; omega

theorem pair_lt_pair_left {a c b : ℕ} (h : a < c) : Nat.pair a b < Nat.pair c b := by
  unfold Nat.pair
  rcases Nat.lt_or_ge a b with hab | hab
  · rw [ite_eq_left hab]
    rcases Nat.lt_or_ge c b with hcb | hcb
    · rw [ite_eq_left hcb]; omega
    · rw [ite_eq_right (Nat.not_lt.mpr hcb)]
      have hbc : b * b ≤ c * c := Nat.mul_le_mul hcb hcb
      omega
  · rw [ite_eq_right (Nat.not_lt.mpr hab),
      ite_eq_right (Nat.not_lt.mpr (le_of_lt (lt_of_le_of_lt hab h)))]
    have hcc : (a + 1) * (a + 1) ≤ c * c := Nat.mul_le_mul h h
    have hexp : (a + 1) * (a + 1) = a * a + 2 * a + 1 := by ring
    omega
```

```
theorem pair_lt_pair_of_lt_le {a c b d : ℕ} (hac : a < c) (hbd : b ≤ d) :
    Nat.pair a b < Nat.pair c d :=
  lt_of_lt_of_le (pair_lt_pair_left hac) (pair_le_pair_right hbd)

section Computability

variable (fe fU fV : ℕ → ℕ) (mIdx : ℕ)

set_option maxHeartbeats 1000000 in

theorem gEval_complete (hD : ∀ X, D.mem X → X.Nonempty)
    (P : ComputablePresentation D) (Q : ComputablePresentation E)
    (hEq : ∀ m, fe (Nat.pair m mIdx) = 1 ↔ Q.X m = E.master) (hMidx : Q.X mIdx = E.
    master)
    (hU : ∀ a m, (∃ i, fU (Nat.pair i (Nat.pair a m)) = 1) ↔ u.rel (P.X a) (Q.X m))
    (hV : ∀ k1 k2 m, (∃ i, fV (Nat.pair i (Nat.pair (Nat.pair k1 k2) m)) = 1) ↔
        v.rel (prodNbhd (Q.X k1) (Q.X k2)) (Q.X m)) :
    ∀ n Z, GRel u v (Vsharp D P n) Z →
      ∃ cert, (gEval fe fU fV mIdx (Nat.pair n cert)).unpair.1 = 1
        ∧ Q.X cert.unpair.1 = Z := by
  intro n
  induction n using Nat.strong_induction_on with
  | _ n ih =>
    intro Z hg
    rcases nat_shape n with rfl | ⟨a, rfl⟩ | ⟨a, rfl⟩
    ·
      rw [Vsharp_zero] at hg
      have hZ := gRel_gamma_inv hD hg
      refine ⟨Nat.pair mIdx (Nat.pair 0 0), ?_, ?_⟩
      · rw [gEval_pair, gStep_gamma, unpair_pair_fst, unpair_pair_fst]
        exact (hEq mIdx).mpr hMidx
      · rw [unpair_pair_fst, hMidx, hZ]
    ·
      rw [Vsharp_odd] at hg
      have hu := gRel_embZero_inv hD hg
      obtain ⟨e, he⟩ := Q.surj (u.rel_cod hu)
      rw [← he] at hu
      obtain ⟨wit, hwit⟩ := (hU a e).mpr hu
      refine ⟨Nat.pair e (Nat.pair wit 0), ?_, ?_⟩
      · rw [gEval_pair, gStep_leaf, unpair_pair_fst, unpair_pair_snd, unpair_pair_fst,
          unpair_pair_fst]
        exact hwit
      · rw [unpair_pair_fst]; exact he
    ·
      rw [Vsharp_even] at hg
      obtain ⟨Z₁, Z₂, hg1, hg2, hvrel⟩ := gRel_embPair_inv hD hg
      obtain ⟨certL, hokL, heqL⟩ := ih a.unpair.1 (by have := unpair_fst_le a; omega) Z
    ₁ hg1
      obtain ⟨certR, hokR, heqR⟩ := ih a.unpair.2 (by have := unpair_snd_le a; omega) Z
    ₂ hg2
      obtain ⟨e, he⟩ := Q.surj (v.rel_cod hvrel)
      rw [← heqL, ← heqR, ← he] at hvrel
      obtain ⟨wit, hwit⟩ := (hV certL.unpair.1 certR.unpair.1 e).mpr hvrel
      refine ⟨Nat.pair e (Nat.pair wit (Nat.pair certL certR)), ?_, ?_⟩
      · rw [gEval_pair, gStep_node, unpair_pair_fst]
```

```
        have hcertL : certL ≤ Nat.pair e (Nat.pair wit (Nat.pair certL certR)) :=
          le_trans (Domain.Recursive.le_pair_left _ _)
            (le_trans (Domain.Recursive.le_pair_right wit _) (Domain.Recursive.
    le_pair_right e _))
        have hcertR : certR ≤ Nat.pair e (Nat.pair wit (Nat.pair certL certR)) :=
          le_trans (Domain.Recursive.le_pair_right _ _)
            (le_trans (Domain.Recursive.le_pair_right wit _) (Domain.Recursive.
    le_pair_right e _))
        have hlt1 : Nat.pair a.unpair.1 certL < Nat.pair (2 * a + 2)
            (Nat.pair e (Nat.pair wit (Nat.pair certL certR))) :=
          pair_lt_pair_of_lt_le (by have := unpair_fst_le a; omega) hcertL
        have hlt2 : Nat.pair a.unpair.2 certR < Nat.pair (2 * a + 2)
            (Nat.pair e (Nat.pair wit (Nat.pair certL certR))) :=
          pair_lt_pair_of_lt_le (by have := unpair_snd_le a; omega) hcertR
        simp only [unpair_pair_fst, unpair_pair_snd]
        rw [listGet_rtbl_gEval fe fU fV mIdx hlt1, listGet_rtbl_gEval fe fU fV mIdx
    hlt2,
          gEval_out, gEval_out]
        rw [show (gEval fe fU fV mIdx (Nat.pair a.unpair.1 certL)).unpair.1 = 1 from
    hokL,
          show (gEval fe fU fV mIdx (Nat.pair a.unpair.2 certR)).unpair.1 = 1 from
    hokR]
        simp only [Nat.one_mul]
        exact hwit
      · rw [unpair_pair_fst]; exact he

theorem primrec_gStep (hfe : Nat.Primrec fe) (hfU : Nat.Primrec fU) (hfV : Nat.Primrec
     fV) :
    Nat.Primrec (gStep fe fU fV mIdx) := by
  have hw : Nat.Primrec (fun p : ℕ => p.unpair.1) := Nat.Primrec.left
  have htbl : Nat.Primrec (fun p : ℕ => p.unpair.2) := Nat.Primrec.right
  have hnn : Nat.Primrec (fun p : ℕ => p.unpair.1.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.left
  have hcert : Nat.Primrec (fun p : ℕ => p.unpair.1.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.left
  have hout : Nat.Primrec (fun p : ℕ => p.unpair.1.unpair.2.unpair.1) := Nat.Primrec.
    left.comp hcert
  have hwit : Nat.Primrec (fun p : ℕ => p.unpair.1.unpair.2.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp (Nat.Primrec.right.comp hcert)
  have hlc : Nat.Primrec (fun p : ℕ => p.unpair.1.unpair.2.unpair.2.unpair.2.unpair.1)
     :=
    Nat.Primrec.left.comp (Nat.Primrec.right.comp (Nat.Primrec.right.comp hcert))
  have hrc : Nat.Primrec (fun p : ℕ => p.unpair.1.unpair.2.unpair.2.unpair.2.unpair.2)
     :=
    Nat.Primrec.right.comp (Nat.Primrec.right.comp (Nat.Primrec.right.comp hcert))
  have hb : Nat.Primrec (fun p : ℕ => p.unpair.1.unpair.1 / 2 - 1) :=
    primrec_sub₂ (primrec_div2.comp hnn) (Nat.Primrec.const 1)
  have hlpos : Nat.Primrec (fun p : ℕ =>
      p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair.1 / 2 - 1).unpair.1
        p.unpair.1.unpair.2.unpair.2.unpair.2.unpair.1) :=
    primrec_sub₂ (primrec_sub₂ hw (Nat.Primrec.const 1))
      ((Nat.Primrec.left.comp hb).pair hlc)
  have hrpos : Nat.Primrec (fun p : ℕ =>
      p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair.1 / 2 - 1).unpair.2
        p.unpair.1.unpair.2.unpair.2.unpair.2.unpair.2) :=
    primrec_sub₂ (primrec_sub₂ hw (Nat.Primrec.const 1))
```

```
      ((Nat.Primrec.right.comp hb).pair hrc)
  have hchildL : Nat.Primrec (fun p : ℕ => listGet p.unpair.2
      (p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair.1 / 2 - 1).unpair.1
        p.unpair.1.unpair.2.unpair.2.unpair.2.unpair.1)) :=
    primrec_listGet₂ htbl hlpos
  have hchildR : Nat.Primrec (fun p : ℕ => listGet p.unpair.2
      (p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair.1 / 2 - 1).unpair.2
        p.unpair.1.unpair.2.unpair.2.unpair.2.unpair.2)) :=
    primrec_listGet₂ htbl hrpos
  have hgamma : Nat.Primrec (fun p : ℕ =>
      Nat.pair (fe (Nat.pair p.unpair.1.unpair.2.unpair.1 mIdx)) p.unpair.1.unpair.2.
    unpair.1) :=
    (hfe.comp (hout.pair (Nat.Primrec.const mIdx))).pair hout
  have hleaf : Nat.Primrec (fun p : ℕ =>
      Nat.pair (fU (Nat.pair p.unpair.1.unpair.2.unpair.2.unpair.1
          (Nat.pair (p.unpair.1.unpair.1 / 2) p.unpair.1.unpair.2.unpair.1)))
        p.unpair.1.unpair.2.unpair.1) :=
    (hfU.comp (hwit.pair ((primrec_div2.comp hnn).pair hout))).pair hout
  have hfVcall : Nat.Primrec (fun p : ℕ =>
      fV (Nat.pair p.unpair.1.unpair.2.unpair.2.unpair.1
        (Nat.pair (Nat.pair
            (listGet p.unpair.2 (p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair.1 / 2 -
    1).unpair.1
              p.unpair.1.unpair.2.unpair.2.unpair.2.unpair.1)).unpair.2
            (listGet p.unpair.2 (p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair.1 / 2 -
    1).unpair.2
              p.unpair.1.unpair.2.unpair.2.unpair.2.unpair.2)).unpair.2)
          p.unpair.1.unpair.2.unpair.1))) :=
    hfV.comp (hwit.pair
      (((Nat.Primrec.right.comp hchildL).pair (Nat.Primrec.right.comp hchildR)).pair
    hout))
  have hnode : Nat.Primrec (fun p : ℕ =>
      Nat.pair ((listGet p.unpair.2 (p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair.1 /
    2 - 1).unpair.1
              p.unpair.1.unpair.2.unpair.2.unpair.2.unpair.1)).unpair.1
          * (listGet p.unpair.2 (p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair.1 / 2 -
    1).unpair.2
              p.unpair.1.unpair.2.unpair.2.unpair.2.unpair.2)).unpair.1
          * fV (Nat.pair p.unpair.1.unpair.2.unpair.2.unpair.1
              (Nat.pair (Nat.pair
                  (listGet p.unpair.2 (p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair.1
    / 2 - 1).unpair.1
                    p.unpair.1.unpair.2.unpair.2.unpair.2.unpair.1)).unpair.2
                  (listGet p.unpair.2 (p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair.1
    / 2 - 1).unpair.2
                    p.unpair.1.unpair.2.unpair.2.unpair.2.unpair.2)).unpair.2)
                p.unpair.1.unpair.2.unpair.1)))
        p.unpair.1.unpair.2.unpair.1) :=
    (primrec_mul₂ (primrec_mul₂ (Nat.Primrec.left.comp hchildL) (Nat.Primrec.left.comp
    hchildR))
      hfVcall).pair hout
  refine (primrec_selectFn (primrec_sub₂ (Nat.Primrec.const 1) hnn) hgamma
    (primrec_selectFn (primrec_mod2.comp hnn) hleaf hnode)).of_eq fun p => rfl

end Computability
```

```
theorem unpair_snd_snd_fst_le (c : ℕ) : c.unpair.2.unpair.2.unpair.1 ≤ c := by
  have h1 := unpair_snd_le c
  have h2 := unpair_snd_le c.unpair.2
  have h3 := unpair_fst_le c.unpair.2.unpair.2
  omega

theorem unpair_snd_snd_snd_le (c : ℕ) : c.unpair.2.unpair.2.unpair.2 ≤ c := by
  have h1 := unpair_snd_le c
  have h2 := unpair_snd_le c.unpair.2
  have h3 := unpair_snd_le c.unpair.2.unpair.2
  omega

section Computability

variable (fe fU fV : ℕ → ℕ) (mIdx : ℕ)

theorem gEval_sound
    (P : ComputablePresentation D) (Q : ComputablePresentation E)
    (hEq : ∀ m, fe (Nat.pair m mIdx) = 1 ↔ Q.X m = E.master)
    (hU : ∀ a m, (∃ i, fU (Nat.pair i (Nat.pair a m)) = 1) ↔ u.rel (P.X a) (Q.X m))
    (hV : ∀ k1 k2 m, (∃ i, fV (Nat.pair i (Nat.pair (Nat.pair k1 k2) m)) = 1) ↔
        v.rel (prodNbhd (Q.X k1) (Q.X k2)) (Q.X m)) :
    ∀ n cert, (gEval fe fU fV mIdx (Nat.pair n cert)).unpair.1 = 1 →
      GRel u v (Vsharp D P n) (Q.X cert.unpair.1) := by
  have key : ∀ w n cert, Nat.pair n cert = w →
      (gEval fe fU fV mIdx (Nat.pair n cert)).unpair.1 = 1 →
        GRel u v (Vsharp D P n) (Q.X cert.unpair.1) := by
    intro w
    induction w using Nat.strong_induction_on with
    | _ w ih =>
      intro n cert hw hok
      rcases nat_shape n with rfl | ⟨a, rfl⟩ | ⟨a, rfl⟩
      · rw [gEval_pair, gStep_gamma, unpair_pair_fst] at hok
        rw [Vsharp_zero]
        exact GRel.gamma ((hEq cert.unpair.1).mp hok)
      · rw [gEval_pair, gStep_leaf, unpair_pair_fst] at hok
        rw [Vsharp_odd]
        exact GRel.leaf ((hU a cert.unpair.1).mp ⟨cert.unpair.2.unpair.1, hok⟩)
      · rw [Vsharp_even]
        rw [gEval_pair, gStep_node, unpair_pair_fst] at hok
        have hlt1 : Nat.pair a.unpair.1 cert.unpair.2.unpair.2.unpair.1 < Nat.pair (2
   * a + 2) cert :=
          pair_lt_pair_of_lt_le (by have := unpair_fst_le a; omega) (
   unpair_snd_snd_fst_le cert)
        have hlt2 : Nat.pair a.unpair.2 cert.unpair.2.unpair.2.unpair.2 < Nat.pair (2
   * a + 2) cert :=
          pair_lt_pair_of_lt_le (by have := unpair_snd_le a; omega) (
   unpair_snd_snd_snd_le cert)
        rw [listGet_rtbl_gEval fe fU fV mIdx hlt1,
          listGet_rtbl_gEval fe fU fV mIdx hlt2] at hok
        rw [nat_mul_eq_one, nat_mul_eq_one] at hok
        obtain ⟨⟨hokL, hokR⟩, hokV⟩ := hok
        have hgL := ih _ (hw ▸ hlt1) a.unpair.1 cert.unpair.2.unpair.2.unpair.1 rfl
   hokL
        have hgR := ih _ (hw ▸ hlt2) a.unpair.2 cert.unpair.2.unpair.2.unpair.2 rfl
   hokR
```

```
        rw [gEval_out, gEval_out] at hokV
        refine GRel.node hgL hgR ?_
        exact (hV _ _ cert.unpair.1).mp ⟨cert.unpair.2.unpair.1, hokV⟩
  intro n cert; exact key (Nat.pair n cert) n cert rfl

end Computability

theorem gMap_isComputable (hD : ∀ X, D.mem X → X.Nonempty)
    (P : ComputablePresentation D) (Q : ComputablePresentation E)
    (hu : ComputableMap P Q u)
    (hv : ComputableMap (prodPresentation Q Q) Q v) :
    ComputableMap (dsharpPresentation P hD) Q (gMap u v hD) := by
  constructor
  obtain ⟨qU, hqU, hqUe⟩ := hu
  obtain ⟨fU, hfUp, hfUe⟩ := hqU
  obtain ⟨qV, hqV, hqVe⟩ := hv
  obtain ⟨fV, hfVp, hfVe⟩ := hqV
  obtain ⟨fe, hfep, hfee⟩ := Q.eq_computable
  have hMidx : Q.X Q.masterIdx = E.master := Q.masterIdx_spec
  have hEq : ∀ m, fe (Nat.pair m Q.masterIdx) = 1 ↔ Q.X m = E.master := by
    intro m
    have h := hfee (Nat.pair m Q.masterIdx)
    simp only [unpair_pair_fst, unpair_pair_snd] at h
    rw [hMidx] at h; exact h.symm
  have hU : ∀ a m, (∃ i, fU (Nat.pair i (Nat.pair a m)) = 1) ↔ u.rel (P.X a) (Q.X m)
    := by
    intro a m
    have h := hqUe (Nat.pair a m)
    simp only [unpair_pair_fst, unpair_pair_snd] at h
    rw [h]; exact exists_congr fun i => (hfUe (Nat.pair i (Nat.pair a m))).symm
  have hV : ∀ k1 k2 m, (∃ i, fV (Nat.pair i (Nat.pair (Nat.pair k1 k2) m)) = 1) ↔
      v.rel (prodNbhd (Q.X k1) (Q.X k2)) (Q.X m) := by
    intro k1 k2 m
    have h := hqVe (Nat.pair (Nat.pair k1 k2) m)
    simp only [prodPresentation_X, unpair_pair_fst, unpair_pair_snd] at h
    rw [h]; exact exists_congr fun i => (hfVe (Nat.pair i (Nat.pair (Nat.pair k1 k2) m
    ))).symm

  have hgEval : Nat.Primrec (gEval fe fU fV Q.masterIdx) :=
    primrec_gOf (primrec_gStep fe fU fV Q.masterIdx hfep hfUp hfVp)
  have hidx : Nat.Primrec (fun s : ℕ => Nat.pair s.unpair.2.unpair.1 s.unpair.1) :=
    (Nat.Primrec.left.comp Nat.Primrec.right).pair Nat.Primrec.left
  have hp1 : RecDecidable (fun s : ℕ =>
      (gEval fe fU fV Q.masterIdx (Nat.pair s.unpair.2.unpair.1 s.unpair.1)).unpair.1
    = 1) :=
    ⟨_, Nat.Primrec.left.comp (hgEval.comp hidx), fun _ => Iff.rfl⟩
  have hg2 : Nat.Primrec (fun s : ℕ => Nat.pair s.unpair.1.unpair.1 s.unpair.2.unpair
    .2) :=
    (Nat.Primrec.left.comp Nat.Primrec.left).pair (Nat.Primrec.right.comp Nat.Primrec.
    right)
  have hp2 : RecDecidable (fun s : ℕ => Q.X s.unpair.1.unpair.1 = Q.X s.unpair.2.
    unpair.2) :=
    RecDecidable.of_iff (fun s => by simp only [unpair_pair_fst, unpair_pair_snd])
      (Q.eq_computable.comp hg2)
  have hbase : REPred (fun s : ℕ =>
      (gEval fe fU fV Q.masterIdx (Nat.pair s.unpair.2.unpair.1 s.unpair.1)).unpair.1
```

```
    = 1
        ∧ Q.X s.unpair.1.unpair.1 = Q.X s.unpair.2.unpair.2) := (hp1.and hp2).re
  unfold REPred₂
  refine REPred.of_iff (fun t => ?_) (REPred.proj hbase)
  simp only [unpair_pair_fst, unpair_pair_snd]
  constructor
  · intro hg
    obtain ⟨cert, hok, heq⟩ :=
      gEval_complete fe fU fV Q.masterIdx hD P Q hEq hMidx hU hV t.unpair.1 (Q.X t.
    unpair.2) hg
    exact ⟨cert, hok, heq⟩
  · rintro ⟨cert, hok, heq⟩
    have hsound := gEval_sound fe fU fV Q.masterIdx P Q hEq hU hV t.unpair.1 cert hok
    rw [heq] at hsound
    exact hsound

end Exercise717
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise717
section
set_option linter.unusedVariables false

theorem example_717_part2.{u_1, u_2} : ∀ {α : Type u_1} {β : Type u_2} {D :
    DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  {u : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β D E}
  {v :
    @DomainTheory.NeighbourhoodSystems.ApproximableMap (Sum β β) β (@DomainTheory.
    NeighbourhoodSystems.prod β β E E) E}
  (hD : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α D X
     → @Set.Nonempty α X)
  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α D)
  (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β E),
  @DomainTheory.NeighbourhoodSystems.ComputableMap α β D E P Q u →
    @DomainTheory.NeighbourhoodSystems.ComputableMap (Sum β β) β (@DomainTheory.
    NeighbourhoodSystems.prod β β E E) E
        (@DomainTheory.NeighbourhoodSystems.prodPresentation β β E E Q Q) Q v →
      @DomainTheory.NeighbourhoodSystems.ComputableMap (Prod (List Bool) α) β
        (@DomainTheory.NeighbourhoodSystems.Example61.Dsharp α D hD) E
        (@DomainTheory.NeighbourhoodSystems.Proposition77.dsharpPresentation α D P hD)
    Q
        (@DomainTheory.NeighbourhoodSystems.Exercise717.gMap α β D E u v hD) :=
  @DomainTheory.NeighbourhoodSystems.Exercise717.gMap_isComputable
end

end DomainTheory.NeighbourhoodSystems.Exercise717
namespace DomainTheory.NeighbourhoodSystems
end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 7.17. Complete the proof of 7.7 for showing that $D^{\S}$ is effectively given if D is. Include all the combinators of 6.2. Prove also that if E is effectively given and $u : D \to E$ and $v : E \times E \to E$ are computable, then the unique strict mapping $g : D^{\S} \to E$, where, for $x \in |D|$ and $y, z \in |E|$,

$$g(\mathrm{in}(x)) = u(x), \quad \text{and}$$

$$g(\mathrm{pair}(y, z)) = v(g(y), g(z)),$$

is a computable mapping.

3.8.20 Exercise 7.18 — effective isomorphism

Exercise_7_18.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_4

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive Example61
open NeighborhoodSystem Domain.Recursive ApproximableMap
namespace Exercise718
open NeighborhoodSystem Domain.Recursive ApproximableMap
section
variable {α β : Type*}

structure EffectiveIso {V : NeighborhoodSystem α} {W : NeighborhoodSystem β}
    (P : ComputablePresentation V) (Q : ComputablePresentation W) where

  toMap : ApproximableMap V W

  invMap : ApproximableMap W V

  toMap_computable : ComputableMap P Q toMap

  invMap_computable : ComputableMap Q P invMap

  left_inv : invMap.comp toMap = idMap V

  right_inv : toMap.comp invMap = idMap W

def EffectivelyIsomorphic {V : NeighborhoodSystem α} {W : NeighborhoodSystem β}
    (P : ComputablePresentation V) (Q : ComputablePresentation W) : Prop :=
  Nonempty (EffectiveIso P Q)

end

end Exercise718
open NeighborhoodSystem Domain.Recursive ApproximableMap Example61

section
variable {α : Type*}
```

```
namespace Proposition77

variable {D : NeighborhoodSystem α} (hD : ∀ X, D.mem X → X.Nonempty)

def proj1Map : ApproximableMap (Dsharp D hD) (Dsharp D hD) where
  rel W Z := MemS D W ∧ MemS D Z ∧ (Z = Gamma D ∨ ∃ Pp Qq, W = embPair Pp Qq ∧ Qq ⊆ Z)
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨MemS.gamma, MemS.gamma, Or.inl rfl⟩
  inter_right := by
    rintro W Z Z' ⟨hW, hZ, hd⟩ ⟨-, hZ', hd'⟩
    have hgZ : Z ⊆ Gamma D := memS_subset_gamma hZ
    have hgZ' : Z' ⊆ Gamma D := memS_subset_gamma hZ'
    rcases hd with rfl | ⟨Pp, Qq, hWeq, hQZ⟩
    · rw [Set.inter_eq_right.mpr hgZ']; exact ⟨hW, hZ', hd'⟩
    · rcases hd' with rfl | ⟨Pp', Qq', hWeq', hQZ'⟩
      · rw [Set.inter_eq_left.mpr hgZ]; exact ⟨hW, hZ, Or.inr ⟨Pp, Qq, hWeq, hQZ⟩⟩
      · have hQQ : Qq = Qq' := (embPair_injective (hWeq.symm.trans hWeq')).2
        have hQsub : Qq ⊆ Z ∩ Z' := Set.subset_inter hQZ (by rw [hQQ]; exact hQZ')
        have hMemQ : MemS D Qq := (memS_embPair_inv hD (hWeq ▸ hW)).2
        exact ⟨hW, memS_inter hD hZ hZ' hMemQ hQsub, Or.inr ⟨Pp, Qq, hWeq, hQsub⟩⟩
  mono := by
    rintro W W' Z Z' ⟨hW, hZ, hd⟩ hW'W hZZ' hW'mem hZ'mem
    refine ⟨hW'mem, hZ'mem, ?_⟩
    rcases hd with rfl | ⟨Pp, Qq, hWeq, hQZ⟩
    · exact Or.inl (Set.Subset.antisymm (memS_subset_gamma hZ'mem) hZZ')
    · subst hWeq
      cases hW'mem with
      | gamma =>
        exact absurd (Set.Subset.antisymm (memS_subset_gamma hW) hW'W)
          (embPair_ne_Gamma D hD Pp Qq)
      | @zero X hX =>
        exfalso
        obtain ⟨a, ha⟩ := hD X hX
        rcases hW'W (show (([], a) : List Bool × α) ∈ embZero X from ⟨rfl, ha⟩) with
          ⟨p', hp', -⟩ | ⟨q', hq', -⟩
        · simp at hp'
        · simp at hq'
      | @pair Pp' Qq' hP' hQ' =>
        obtain ⟨-, hQ'Q⟩ := embPair_subset.mp hW'W
        exact Or.inr ⟨Pp', Qq', rfl, fun z hz => hZZ' (hQZ (hQ'Q hz))⟩

@[simp] theorem proj1Map_rel {W Z : Set (List Bool × α)} :
    (proj1Map hD).rel W Z ↔
      MemS D W ∧ MemS D Z ∧ (Z = Gamma D ∨ ∃ Pp Qq, W = embPair Pp Qq ∧ Qq ⊆ Z) := Iff
    .rfl

def pairSharpMap : ApproximableMap (prod (Dsharp D hD) (Dsharp D hD)) (Dsharp D hD)
    where
  rel V W := (prod (Dsharp D hD) (Dsharp D hD)).mem V ∧ MemS D W ∧
    ∃ A B, MemS D A ∧ MemS D B ∧ V = prodNbhd A B ∧ embPair A B ⊆ W
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨(prod (Dsharp D hD) (Dsharp D hD)).master_mem, MemS.gamma,
    ⟨Gamma D, Gamma D, MemS.gamma, MemS.gamma, rfl, embPair_subset_Gamma subset_rfl
    subset_rfl⟩⟩
```

```
  inter_right := by
    rintro V W W' ⟨hV, hW, A, B, hA, hB, rfl, hsub⟩ ⟨-, hW', A', B', hA', hB', heq,
    hsub'⟩
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    exact ⟨hV, memS_inter hD hW hW' (MemS.pair hA hB) (Set.subset_inter hsub hsub'),
      A, B, hA, hB, rfl, Set.subset_inter hsub hsub'⟩
  mono := by
    rintro V V' W W' ⟨hV, hW, A, B, hA, hB, rfl, hsub⟩ hV'V hWW' hV'mem hW'mem
    obtain ⟨A', B', hA', hB', rfl⟩ := hV'mem
    obtain ⟨hA'A, hB'B⟩ := prodNbhd_subset_iff.mp hV'V
    exact ⟨prod_mem_prodNbhd hA' hB', hW'mem, A', B', hA', hB', rfl,
      (embPair_subset.mpr ⟨hA'A, hB'B⟩).trans (hsub.trans hWW')⟩

@[simp] theorem pairSharpMap_rel {V : Set ((List Bool × α) ? (List Bool × α))}
    {W : Set (List Bool × α)} :
    (pairSharpMap hD).rel V W ↔
      (prod (Dsharp D hD) (Dsharp D hD)).mem V ∧ MemS D W ∧
        ∃ A B, MemS D A ∧ MemS D B ∧ V = prodNbhd A B ∧ embPair A B ⊆ W := Iff.rfl

theorem pairSharpMap_toElementMap (x y : (Dsharp D hD).Element) :
    (pairSharpMap hD).toElementMap (DomainTheory.NeighbourhoodSystems.pair x y) =
    pairSharp D hD x y := by
  apply Element.ext
  intro W
  simp only [ApproximableMap.mem_toElementMap, pairSharpMap_rel, mem_pair]
  constructor
  · rintro ⟨V, ⟨A0, B0, hxA0, hyB0, rfl⟩, -, hW, A, B, -, -, heq, hsub⟩
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    exact (pairSharp D hD x y).up_mem (Or.inr ⟨A0, B0, hxA0, hyB0, rfl⟩) hW hsub
  · intro hW
    rcases hW with rfl | ⟨P, Q, hxP, hyQ, rfl⟩
    · exact ⟨prodNbhd (Gamma D) (Gamma D), ⟨Gamma D, Gamma D, x.master_mem, y.master_mem
    , rfl⟩,
        ⟨Gamma D, Gamma D, MemS.gamma, MemS.gamma, rfl⟩, MemS.gamma,
        Gamma D, Gamma D, MemS.gamma, MemS.gamma, rfl,
        embPair_subset_Gamma subset_rfl subset_rfl⟩
    · exact ⟨prodNbhd P Q, ⟨P, Q, hxP, hyQ, rfl⟩, prod_mem_prodNbhd (x.sub hxP) (y.sub
    hyQ),
        MemS.pair (x.sub hxP) (y.sub hyQ), P, Q, x.sub hxP, y.sub hyQ, rfl, subset_rfl⟩

theorem pairSharp_rel_Vsharp_iff (P : ComputablePresentation D) (t k : ℕ) :
    (pairSharpMap hD).rel
        ((prodPresentation (dsharpPresentation P hD) (dsharpPresentation P hD)).X t)
        ((dsharpPresentation P hD).X k) ↔
      Vsharp D P (2 * t + 2) ⊆ Vsharp D P k := by
  rw [pairSharpMap_rel, prodPresentation_X, Vsharp_even]
  constructor
  · rintro ⟨-, -, A, B, -, -, heq, hsub⟩
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    exact hsub
  · intro hsub
    exact ⟨prod_mem_prodNbhd (Vsharp_mem P _) (Vsharp_mem P _), Vsharp_mem P k,
      _, _, Vsharp_mem P _, Vsharp_mem P _, rfl, hsub⟩

end Proposition77
end
```

```
end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 7.18. Two effectively given systems D and E are *effectively isomorphic* iff ... (complete the sentence!). Show that if D is effectively given then the isomorphism

$$D^\infty \cong (D^\infty)^\infty$$

is effective.

3.8.21 Exercise 7.19 — power domain functor

Exercise_7_19.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_10

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_11

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α β ? : Type*}
variable {V : NeighborhoodSystem α} {W : NeighborhoodSystem β} {U : NeighborhoodSystem
     ?}

def PFmap (f : ApproximableMap V W) : ApproximableMap V.PowerDomain W.PowerDomain
    where
  rel A B := V.PDmem A ∧ W.PDmem B ∧ ∀ X ∈ A, ∃ Y ∈ B, f.rel X Y
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := by
    refine ⟨V.PDmem_master, W.PDmem_master, ?_⟩
    rintro X ⟨hXmem, hXsub⟩
    exact ⟨W.master, ⟨W.master_mem, subset_rfl⟩,
      f.mono f.master_rel hXsub subset_rfl hXmem W.master_mem⟩
  inter_right := by
    rintro A B B' ⟨hA, hB, hbody⟩ ⟨-, hB', hbody'⟩
    refine ⟨hA, W.PDmem_inter hB hB', ?_⟩
    intro X hX
    obtain ⟨Y, hYB, hrel⟩ := hbody X hX
    obtain ⟨Y', hY'B', hrel'⟩ := hbody' X hX
    have hinmem : W.mem (Y ∩ Y') := f.rel_cod (f.inter_right hrel hrel')
    exact ⟨Y ∩ Y', Set.mem_inter
      (W.PDmem_down hB hYB Set.inter_subset_left hinmem)
      (W.PDmem_down hB' hY'B' Set.inter_subset_right hinmem),
      f.inter_right hrel hrel'⟩
  mono := by
```

```
    rintro A A' B B' ⟨_, _, hbody⟩ hA'A hBB' hA' hB'
    refine ⟨hA', hB', ?_⟩
    intro X hX
    obtain ⟨Y, hYB, hrel⟩ := hbody X (hA'A hX)
    exact ⟨Y, hBB' hYB, hrel⟩

@[simp] theorem PFmap_rel {f : ApproximableMap V W} {A : Set (Set α)} {B : Set (Set β)
    } :
    (PFmap f).rel A B ↔ V.PDmem A ∧ W.PDmem B ∧ ∀ X ∈ A, ∃ Y ∈ B, f.rel X Y := Iff.
    rfl

def PFmapComb (V : NeighborhoodSystem α) (W : NeighborhoodSystem β) :
    ApproximableMap (funSpace V W) (funSpace V.PowerDomain W.PowerDomain) where
  rel ? ? := (funSpace V W).mem ? ∧ (funSpace V.PowerDomain W.PowerDomain).mem ? ∧
    ∀ f ∈ ?, PFmap f ∈ ?
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel :=
    ⟨(funSpace V W).master_mem, (funSpace V.PowerDomain W.PowerDomain).master_mem,
      fun _ _ => Set.mem_univ _⟩
  inter_right := by
    rintro ? ? ?' ⟨h?, h?, hbody⟩ ⟨-, h?', hbody'⟩
    obtain ⟨f₀, hf₀⟩ := h?.2
    obtain ⟨⟨L₂, hL₂, rfl⟩, -⟩ := h?
    obtain ⟨⟨L₂', hL₂', rfl⟩, -⟩ := h?'
    refine ⟨h?, ⟨⟨L₂ ++ L₂', ?_, (stepFun_append _ _).symm⟩,
        ⟨PFmap f₀, Set.mem_inter (hbody f₀ hf₀) (hbody' f₀ hf₀)⟩⟩,
      fun f hf => Set.mem_inter (hbody f hf) (hbody' f hf)⟩
    intro q hq
    rcases List.mem_append.mp hq with hq' | hq'
    · exact hL₂ q hq'
    · exact hL₂' q hq'
  mono := by
    rintro ? ?' ? ?' ⟨_, _, hbody⟩ h?'? h??' h?' h?'
    exact ⟨h?', h?', fun f hf => h??' (hbody f (h?'? hf))⟩

end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α β ? : Type*}

namespace NeighborhoodSystem

variable (V : NeighborhoodSystem α)

end NeighborhoodSystem

variable {V : NeighborhoodSystem α} {W : NeighborhoodSystem β} {U : NeighborhoodSystem
    ?}

@[simp] theorem PFmapComb_rel {? : Set (ApproximableMap V W)}
    {? : Set (ApproximableMap V.PowerDomain W.PowerDomain)} :
    (PFmapComb V W).rel ? ? ↔
      (funSpace V W).mem ? ∧ (funSpace V.PowerDomain W.PowerDomain).mem ? ∧
        ∀ f ∈ ?, PFmap f ∈ ? := Iff.rfl
```

```
end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α β ? : Type*}

namespace NeighborhoodSystem

variable (V : NeighborhoodSystem α)

theorem PDmem_mem {A : Set (Set α)} (hA : V.PDmem A) {X : Set α} (hX : X ∈ A) : V.mem
    X := by
  obtain ⟨L, hL, rfl⟩ := hA
  obtain ⟨X', _, hXmem, _⟩ := (V.mem_PDunion).mp hX
  exact hXmem

end NeighborhoodSystem
end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α β ? : Type*}
variable {V : NeighborhoodSystem α} {W : NeighborhoodSystem β} {U : NeighborhoodSystem
     ?}

theorem PFmap_idMap (V : NeighborhoodSystem α) : PFmap (idMap V) = idMap V.PowerDomain
     := by
  apply ApproximableMap.ext
  intro A B
  simp only [PFmap_rel, idMap_rel]
  constructor
  · rintro ⟨hA, hB, hbody⟩
    refine ⟨hA, hB, ?_⟩
    intro X hX
    obtain ⟨Y, hYB, hXmem, _, hXY⟩ := hbody X hX
    exact V.PDmem_down hB hYB hXY hXmem
  · rintro ⟨hA, hB, hsub⟩
    refine ⟨hA, hB, ?_⟩
    intro X hX
    exact ⟨X, hsub hX, V.PDmem_mem hA hX, V.PDmem_mem hA hX, subset_rfl⟩

theorem PFmap_rel_Ypd_iff (P : ComputablePresentation V) (Q : ComputablePresentation W
    )
    (f : ApproximableMap V W) {c d : ℕ} :
    (PFmap f).rel (V.Ypd P c) (W.Ypd Q d) ↔
      ∀ a ∈ decodeList c, ∃ b ∈ decodeList d, f.rel (P.X a) (Q.X b) := by
  constructor
  · rintro ⟨-, -, hbody⟩ a ha
    have hXin : P.X a ∈ V.Ypd P c := (V.mem_Ypd P).mpr ⟨a, ha, P.mem_X a, subset_rfl⟩
    obtain ⟨Y, hYin, hrel⟩ := hbody (P.X a) hXin
    obtain ⟨b, hb, hYmem, hYsub⟩ := (W.mem_Ypd Q).mp hYin
    exact ⟨b, hb, f.mono hrel subset_rfl hYsub (P.mem_X a) (Q.mem_X b)⟩
  · intro hgen
    refine ⟨V.Ypd_isPDmem P c, W.Ypd_isPDmem Q d, ?_⟩
    rintro X hXin
    obtain ⟨a, ha, hXmem, hXsub⟩ := (V.mem_Ypd P).mp hXin
```

```
    obtain ⟨b, hb, hrel⟩ := hgen a ha
    exact ⟨Q.X b, (W.mem_Ypd Q).mpr ⟨b, hb, Q.mem_X b, subset_rfl⟩,
      f.mono hrel hXsub subset_rfl hXmem (Q.mem_X b)⟩

theorem PFmap_rel_fin (f : ApproximableMap V W) {L₁ : List (Set α)} {L₂ : List (Set β)}
    (hL₁ : ∀ X ∈ L₁, V.mem X) (hL₂ : ∀ Y ∈ L₂, W.mem Y) :
    (PFmap f).rel (⋃ X ∈ L₁, V.upSet X) (⋃ Y ∈ L₂, W.upSet Y)
      ↔ ∀ X ∈ L₁, ∃ Y ∈ L₂, f.rel X Y := by
  constructor
  · rintro ⟨-, -, hbody⟩ X hX
    have hXin : X ∈ ⋃ X' ∈ L₁, V.upSet X' :=
      (V.mem_PDunion).mpr ⟨X, hX, hL₁ X hX, subset_rfl⟩
    obtain ⟨Z, hZin, hrel⟩ := hbody X hXin
    obtain ⟨Y, hY, hZmem, hZsub⟩ := (W.mem_PDunion).mp hZin
    exact ⟨Y, hY, f.mono hrel subset_rfl hZsub (hL₁ X hX) (hL₂ Y hY)⟩
  · intro hgen
    refine ⟨⟨L₁, hL₁, rfl⟩, ⟨L₂, hL₂, rfl⟩, ?_⟩
    rintro Z hZin
    obtain ⟨X, hX, hZmem, hZsub⟩ := (V.mem_PDunion).mp hZin
    obtain ⟨Y, hY, hrel⟩ := hgen X hX
    exact ⟨Y, (W.mem_PDunion).mpr ⟨Y, hY, hL₂ Y hY, subset_rfl⟩,
      f.mono hrel hZsub subset_rfl hZmem (hL₂ Y hY)⟩

theorem bExists_decodeList_re {R : ℕ → ℕ → Prop} (hR : REPred₂ R) :
    REPred₂ (fun d a => ∃ b ∈ decodeList d, R a b) := by
  have hmem : RecDecidable₂ (fun d b => b ∈ decodeList d) := by
    have heq : RecDecidable₂ (fun e b => e = b) :=
      RecDecidable.natEq Nat.Primrec.left Nat.Primrec.right
    have hbase : RecDecidable₂ (fun d b => ∃ e ∈ decodeList d, e = b) := heq.
    bExistsList
    refine RecDecidable.of_iff (fun t => ?_) hbase
    constructor
    · intro h; exact ⟨_, h, rfl⟩
    · rintro ⟨e, he, rfl⟩; exact he
  have hpart1 : REPred (fun w : ℕ => w.unpair.1 ∈ decodeList w.unpair.2.unpair.1) :=
    by
    have hg : Nat.Primrec (fun w : ℕ => Nat.pair w.unpair.2.unpair.1 w.unpair.1) :=
      (Nat.Primrec.left.comp Nat.Primrec.right).pair Nat.Primrec.left
    refine RecDecidable.re (RecDecidable.of_iff (fun w => ?_) (hmem.comp hg))
    simp only [unpair_pair_fst, unpair_pair_snd]
  have hpart2 : REPred (fun w : ℕ => R w.unpair.2.unpair.2 w.unpair.1) := by
    have hg : Nat.Primrec (fun w : ℕ => Nat.pair w.unpair.2.unpair.2 w.unpair.1) :=
      (Nat.Primrec.right.comp Nat.Primrec.right).pair Nat.Primrec.left
    refine REPred.of_iff (fun w => ?_) (REPred.comp hR hg)
    simp only [unpair_pair_fst, unpair_pair_snd]
  refine REPred.of_iff (fun s => ?_) (hpart1.and hpart2).proj
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem PFmap_isComputable_Ypd (P : ComputablePresentation V) (Q :
    ComputablePresentation W)
    {f : ApproximableMap V W} (hf : ComputableMap P Q f) :
    REPred₂ (fun c d => (PFmap f).rel (V.Ypd P c) (W.Ypd Q d)) := by
  have hR : REPred₂ (fun a b => f.rel (P.X a) (Q.X b)) := hf.out
  have hInner : REPred₂ (fun d a => ∃ b ∈ decodeList d, f.rel (P.X a) (Q.X b)) :=
    bExists_decodeList_re hR
  have hForall := REPred.forall_mem_decodeList₂ hInner
```

```
  have hswap : Nat.Primrec (fun s : ℕ => Nat.pair s.unpair.2 s.unpair.1) :=
    Nat.Primrec.right.pair Nat.Primrec.left
  refine REPred.of_iff (fun s => ?_) (hForall.comp hswap)
  simp only [unpair_pair_fst, unpair_pair_snd]
  exact PFmap_rel_Ypd_iff P Q f

theorem PFmap_isComputable (P : ComputablePresentation V) (Q : ComputablePresentation
    W)
    (consV : ℕ → ℕ) (hconsVp : Nat.Primrec consV)
    (hconsVs : ∀ a b, consV (Nat.pair a b) = 1 ↔ ∃ k, P.X k ⊆ P.X a ∩ P.X b)
    (consW : ℕ → ℕ) (hconsWp : Nat.Primrec consW)
    (hconsWs : ∀ a b, consW (Nat.pair a b) = 1 ↔ ∃ k, Q.X k ⊆ Q.X a ∩ Q.X b)
    {f : ApproximableMap V W} (hf : ComputableMap P Q f) :
    ComputableMap (V.PDPresentation P consV hconsVp hconsVs)
      (W.PDPresentation Q consW hconsWp hconsWs) (PFmap f) := by
  exact ⟨PFmap_isComputable_Ypd P Q hf⟩

theorem comp_witness (f : ApproximableMap V W) (g : ApproximableMap W U) (C : Set (Set
     ?)) :
    ∀ (L : List (Set α)), (∀ X ∈ L, V.mem X) →
      (∀ X ∈ L, ∃ Z, Z ∈ C ∧ ∃ Y, f.rel X Y ∧ g.rel Y Z) →
      ∃ M : List (Set β), (∀ Y ∈ M, W.mem Y) ∧
        (∀ X ∈ L, ∃ Y ∈ M, f.rel X Y) ∧ (∀ Y ∈ M, ∃ Z ∈ C, g.rel Y Z) := by
  intro L
  induction L with
  | nil =>
    intro _ _
    refine ⟨[], ?_, ?_, ?_⟩
    · intro Y hY; cases hY
    · intro X hX; cases hX
    · intro Y hY; cases hY
  | cons X L ih =>
    intro hL hpre
    obtain ⟨Zx, hZxC, Yx, hfx, hgx⟩ := hpre X (List.mem_cons.mpr (Or.inl rfl))
    obtain ⟨M, hMmem, hfM, hgM⟩ :=
      ih (fun X' hX' => hL X' (List.mem_cons.mpr (Or.inr hX')))
         (fun X' hX' => hpre X' (List.mem_cons.mpr (Or.inr hX')))
    refine ⟨Yx :: M, ?_, ?_, ?_⟩
    · intro Y hY
      rcases List.mem_cons.mp hY with rfl | hY'
      · exact f.rel_cod hfx
      · exact hMmem Y hY'
    · intro X' hX'
      rcases List.mem_cons.mp hX' with rfl | hX''
      · exact ⟨Yx, List.mem_cons.mpr (Or.inl rfl), hfx⟩
      · obtain ⟨Y, hYM, hrel⟩ := hfM X' hX''
        exact ⟨Y, List.mem_cons.mpr (Or.inr hYM), hrel⟩
    · intro Y hY
      rcases List.mem_cons.mp hY with rfl | hY'
      · exact ⟨Zx, hZxC, hgx⟩
      · exact hgM Y hY'

theorem PFmap_comp (g : ApproximableMap W U) (f : ApproximableMap V W) :
    PFmap (g.comp f) = (PFmap g).comp (PFmap f) := by
  apply ApproximableMap.ext
  intro A C
```

```
  simp only [PFmap_rel, comp_rel]
  constructor
  · rintro ⟨hA, hC, hbody⟩
    obtain ⟨L, hL, rfl⟩ := hA
    have hpre : ∀ X ∈ L, ∃ Z, Z ∈ C ∧ ∃ Y, f.rel X Y ∧ g.rel Y Z := by
      intro X hX
      obtain ⟨Z, hZC, Y, hfXY, hgYZ⟩ :=
        hbody X ((V.mem_PDunion).mpr ⟨X, hX, hL X hX, subset_rfl⟩)
      exact ⟨Z, hZC, Y, hfXY, hgYZ⟩
    obtain ⟨M, hMmem, hfL, hgM⟩ := comp_witness f g C L hL hpre
    refine ⟨⋃ Y ∈ M, W.upSet Y,
      ⟨⟨L, hL, rfl⟩, ⟨M, hMmem, rfl⟩, ?_⟩, ⟨M, hMmem, rfl⟩, hC, ?_⟩
    · intro X hX
      obtain ⟨X', hX', hXmem, hXsub⟩ := (V.mem_PDunion).mp hX
      obtain ⟨Y, hYM, hrel⟩ := hfL X' hX'
      exact ⟨Y, (W.mem_PDunion).mpr ⟨Y, hYM, hMmem Y hYM, subset_rfl⟩,
        f.mono hrel hXsub subset_rfl hXmem (hMmem Y hYM)⟩
    · intro Y hY
      obtain ⟨Y', hY', hYmem, hYsub⟩ := (W.mem_PDunion).mp hY
      obtain ⟨Z, hZC, hrel⟩ := hgM Y' hY'
      exact ⟨Z, hZC, g.mono hrel hYsub subset_rfl hYmem (g.rel_cod hrel)⟩
  · rintro ⟨B, ⟨hA, hB, hfAB⟩, _, hC, hgBC⟩
    refine ⟨hA, hC, ?_⟩
    intro X hX
    obtain ⟨Y, hYB, hfXY⟩ := hfAB X hX
    obtain ⟨Z, hZC, hgYZ⟩ := hgBC Y hYB
    exact ⟨Z, hZC, Y, hfXY, hgYZ⟩

theorem gather_witnesses (f : ApproximableMap V W) :
    ∀ (L₁ : List (Set α)) (L₂ : List (Set β)), (∀ X ∈ L₁, ∃ Y ∈ L₂, f.rel X Y) →
      ∃ M : List (Set α × Set β), (∀ p ∈ M, p.1 ∈ L₁ ∧ p.2 ∈ L₂ ∧ f.rel p.1 p.2) ∧
        ∀ X ∈ L₁, ∃ Y ∈ L₂, (X, Y) ∈ M := by
  intro L₁
  induction L₁ with
  | nil => intro L₂ _; exact ⟨[], by simp, by simp⟩
  | cons X L₁ ih =>
    intro L₂ h
    obtain ⟨Y, hY, hrel⟩ := h X (List.mem_cons.mpr (Or.inl rfl))
    obtain ⟨M, hMprop, hMwit⟩ := ih L₂ (fun X' hX' => h X' (List.mem_cons.mpr (Or.inr
    hX')))
    refine ⟨(X, Y) :: M, ?_, ?_⟩
    · rintro p hp
      rcases List.mem_cons.mp hp with rfl | hp'
      · exact ⟨List.mem_cons.mpr (Or.inl rfl), hY, hrel⟩
      · obtain ⟨hX1, hY1, hrel1⟩ := hMprop p hp'
        exact ⟨List.mem_cons.mpr (Or.inr hX1), hY1, hrel1⟩
    · intro X' hX'
      rcases List.mem_cons.mp hX' with rfl | hX''
      · exact ⟨Y, hY, List.mem_cons.mpr (Or.inl rfl)⟩
      · obtain ⟨Y', hY', hmem⟩ := hMwit X' hX''
        exact ⟨Y', hY', List.mem_cons.mpr (Or.inr hmem)⟩

theorem exists_stepFun_forall_PFmap_rel (f : ApproximableMap V W) :
    ∀ (L : List (Set (Set α) × Set (Set β))),
      (∀ p ∈ L, V.PDmem p.1 ∧ W.PDmem p.2) → (∀ p ∈ L, (PFmap f).rel p.1 p.2) →
      ∃ M : List (Set α × Set β), (∀ p ∈ M, V.mem p.1 ∧ W.mem p.2) ∧
```

```
        (∀ p ∈ M, f.rel p.1 p.2) ∧
        ∀ g : ApproximableMap V W, (∀ p ∈ M, g.rel p.1 p.2) → ∀ p ∈ L, (PFmap g).rel p
    .1 p.2 := by
  intro L
  induction L with
  | nil => intro _ _; exact ⟨[], by simp, by simp, by simp⟩
  | cons p L ih =>
    intro hL hf
    obtain ⟨hA, hB⟩ := hL p (List.mem_cons.mpr (Or.inl rfl))
    obtain ⟨L₁, hL₁, hAeq⟩ := hA
    obtain ⟨L₂, hL₂, hBeq⟩ := hB
    have hrelAB : (PFmap f).rel p.1 p.2 := hf p (List.mem_cons.mpr (Or.inl rfl))
    rw [hAeq, hBeq] at hrelAB
    have hgen := (PFmap_rel_fin f hL₁ hL₂).mp hrelAB
    obtain ⟨M₀, hM₀prop, hM₀wit⟩ := gather_witnesses f L₁ L₂ hgen
    obtain ⟨M, hMmem, hMrel, hMgen⟩ :=
      ih (fun p' hp' => hL p' (List.mem_cons.mpr (Or.inr hp')))
         (fun p' hp' => hf p' (List.mem_cons.mpr (Or.inr hp')))
    refine ⟨M₀ ++ M, ?_, ?_, ?_⟩
    · intro q hq
      rcases List.mem_append.mp hq with hq' | hq'
      · obtain ⟨hq1, hq2, _⟩ := hM₀prop q hq'
        exact ⟨hL₁ q.1 hq1, hL₂ q.2 hq2⟩
      · exact hMmem q hq'
    · intro q hq
      rcases List.mem_append.mp hq with hq' | hq'
      · exact (hM₀prop q hq').2.2
      · exact hMrel q hq'
    · intro g hg p' hp'
      rcases List.mem_cons.mp hp' with rfl | hp''
      · rw [hAeq, hBeq]
        refine (PFmap_rel_fin g hL₁ hL₂).mpr ?_
        intro X hX
        obtain ⟨Y, hY, hmem⟩ := hM₀wit X hX
        exact ⟨Y, hY, hg (X, Y) (List.mem_append.mpr (Or.inl hmem))⟩
      · exact hMgen g (fun q hq => hg q (List.mem_append.mpr (Or.inr hq))) p' hp''

theorem PFmapComb_toElementMap (f : ApproximableMap V W) :
    (PFmapComb V W).toElementMap (toFilter f) = toFilter (PFmap f) := by
  apply Element.ext
  intro ?
  simp only [mem_toElementMap, mem_toFilter, PFmapComb_rel]
  constructor
  · rintro ⟨?, ⟨_, h?f⟩, _, h?mem, hbody⟩
    exact ⟨h?mem, hbody f h?f⟩
  · rintro ⟨h?mem, hf?⟩
    obtain ⟨⟨L₂, hL₂, rfl⟩, -⟩ := h?mem
    obtain ⟨M, hMmem, hMrel, hMgen⟩ :=
      exists_stepFun_forall_PFmap_rel f L₂ hL₂ (mem_stepFun.mp hf?)
    have h?mem : (funSpace V W).mem (stepFun M) := ⟨⟨M, hMmem, rfl⟩, f, mem_stepFun.mpr
     hMrel⟩
    have h?mem' : (funSpace V.PowerDomain W.PowerDomain).mem (stepFun L₂) :=
      ⟨⟨L₂, hL₂, rfl⟩, PFmap f, hf?⟩
    exact ⟨stepFun M, ⟨h?mem, mem_stepFun.mpr hMrel⟩, h?mem, h?mem',
      fun g hg => mem_stepFun.mpr (hMgen g (mem_stepFun.mp hg))⟩
```

```
end

section
set_option linter.unusedVariables false

theorem example_719.{u_1, u_2, u_3} : And
  (And
    (And
      (And
        (And
          (And
            (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
              {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
              (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W),
              @Eq
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set β)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
     α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
     β W))
                  (@DomainTheory.NeighbourhoodSystems.funSpace (Set α) (Set β)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
     α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
     β W)))
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set β)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
     α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
     β W))
                  (@DomainTheory.NeighbourhoodSystems.funSpace α β V W)
                  (@DomainTheory.NeighbourhoodSystems.funSpace (Set α) (Set β)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
     α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
     β W))
                  (@DomainTheory.NeighbourhoodSystems.PFmapComb α β V W)
                  (@DomainTheory.NeighbourhoodSystems.toFilter α β V W f))
                (@DomainTheory.NeighbourhoodSystems.toFilter (Set α) (Set β)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
     V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β
     W)
                  (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)))
          (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V : DomainTheory.
    NeighbourhoodSystems.NeighborhoodSystem α}
            {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
            {U : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
            (g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β ? W U)
            (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W),
            @Eq
```

```
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set ?)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain ?
 U))
            (@DomainTheory.NeighbourhoodSystems.PFmap α ? V U
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α β ? V W U
 g f))
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp (Set α) (Set
β) (Set ?)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β
 W)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain ?
 U)
              (@DomainTheory.NeighbourhoodSystems.PFmap β ? W U g)
              (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f))))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@DomainTheory.NeighbourhoodSystems.PFmap α α V V
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap α V))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))))
    (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
      {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
      (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W) (consV :
 Nat → Nat)
      (hconsVp : Nat.Primrec consV)
      (hconsVs :
        ∀ (a b : Nat),
          Iff (@Eq Nat (consV (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
instOfNatNat (nat_lit 1))))
            (∃ (k : Nat),
              @LE.le (Set α) (@Set.instLE α) (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
                (@Inter.inter (Set α) (@Set.instInter α)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P b))))
      (consW : Nat → Nat) (hconsWp : Nat.Primrec consW)
      (hconsWs :
        ∀ (a b : Nat),
          Iff (@Eq Nat (consW (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
instOfNatNat (nat_lit 1))))
            (∃ (k : Nat),
```

```
              @LE.le (Set β) (@Set.instLE β) (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X β W Q k)
                (@Inter.inter (Set β) (@Set.instInter β)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W
 Q a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W
 Q b))))
      {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W},
      @DomainTheory.NeighbourhoodSystems.ComputableMap α β V W P Q f →
        @DomainTheory.NeighbourhoodSystems.ComputableMap (Set α) (Set β)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation α
V P consV hconsVp hconsVs)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation β
W Q consW hconsWp hconsWs)
          (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)))
  (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
    {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
    (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W)
    {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W},
    @DomainTheory.NeighbourhoodSystems.ComputableMap α β V W P Q f →
      Domain.Recursive.REPred₂ fun (c d : Nat) =>
        @DomainTheory.NeighbourhoodSystems.ApproximableMap.rel (Set α) (Set β)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
          (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P c)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd β W Q d)))
 (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
  {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
  (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W)
  (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W) {c d : Nat},
  Iff
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel (Set α) (Set β)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
      (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P c)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd β W Q d))
    (∀ (a : Nat),
      @Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.Recursive.
decodeList c) a →
        ∃ (b : Nat),
          And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.
Recursive.decodeList d) b)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α β V W f
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P a
)
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W Q b
)))))
(∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
```

```
  NeighborhoodSystem α}
  {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W) {L₁ : List (Set α
  )} {L₂ : List (Set β)},
  (∀ (X : Set α),
      @Membership.mem (Set α) (List (Set α)) (@List.instMembership (Set α)) L₁ X →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X) →
    (∀ (Y : Set β),
        @Membership.mem (Set β) (List (Set β)) (@List.instMembership (Set β)) L₂ Y →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β W Y) →
      Iff
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel (Set α) (Set β)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
          (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)
          (⋃ (X : Set α),
            ⋃ (_ : @Membership.mem (Set α) (List (Set α)) (@List.instMembership (Set
   α)) L₁ X),
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V X)
          (⋃ (Y : Set β),
            ⋃ (_ : @Membership.mem (Set β) (List (Set β)) (@List.instMembership (Set
   β)) L₂ Y),
              @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet β W Y))
        (∀ (X : Set α),
          @Membership.mem (Set α) (List (Set α)) (@List.instMembership (Set α)) L₁ X
   →
            ∃ (Y : Set β),
              And (@Membership.mem (Set β) (List (Set β)) (@List.instMembership (Set
   β)) L₂ Y)
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α β V W f X
  Y))) :=
@And.intro
(And
  (And
    (And
      (And
        (And
          (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
            {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
            (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W),
            @Eq
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set β)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
   α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
   β W))
                (@DomainTheory.NeighbourhoodSystems.funSpace (Set α) (Set β)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
   α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
   β W)))
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set β)
```

```
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W))
              (@DomainTheory.NeighbourhoodSystems.funSpace α β V W)
              (@DomainTheory.NeighbourhoodSystems.funSpace (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W))
              (@DomainTheory.NeighbourhoodSystems.PFmapComb α β V W)
              (@DomainTheory.NeighbourhoodSystems.toFilter α β V W f))
            (@DomainTheory.NeighbourhoodSystems.toFilter (Set α) (Set β)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β
 W)
              (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)))
        (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
          {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
          {U : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
          (g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β ? W U)
          (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W),
          @Eq
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set ?)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain ?
 U))
            (@DomainTheory.NeighbourhoodSystems.PFmap α ? V U
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α β ? V W U
 g f))
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp (Set α) (Set
β) (Set ?)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β
 W)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain ?
 U)
              (@DomainTheory.NeighbourhoodSystems.PFmap β ? W U g)
              (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f))))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@DomainTheory.NeighbourhoodSystems.PFmap α α V V
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap α V))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))))
```

```
    (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
      {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
      (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W) (consV :
 Nat → Nat)
      (hconsVp : Nat.Primrec consV)
      (hconsVs :
        ∀ (a b : Nat),
          Iff (@Eq Nat (consV (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
instOfNatNat (nat_lit 1))))
            (∃ (k : Nat),
              @LE.le (Set α) (@Set.instLE α) (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
                (@Inter.inter (Set α) (@Set.instInter α)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P b))))
      (consW : Nat → Nat) (hconsWp : Nat.Primrec consW)
      (hconsWs :
        ∀ (a b : Nat),
          Iff (@Eq Nat (consW (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
instOfNatNat (nat_lit 1))))
            (∃ (k : Nat),
              @LE.le (Set β) (@Set.instLE β) (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X β W Q k)
                (@Inter.inter (Set β) (@Set.instInter β)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W
 Q a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W
 Q b))))
      {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W},
      @DomainTheory.NeighbourhoodSystems.ComputableMap α β V W P Q f →
        @DomainTheory.NeighbourhoodSystems.ComputableMap (Set α) (Set β)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation α
V P consV hconsVp hconsVs)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation β
W Q consW hconsWp hconsWs)
          (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)))
  (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
    {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
    (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W)
    {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W},
    @DomainTheory.NeighbourhoodSystems.ComputableMap α β V W P Q f →
      Domain.Recursive.REPred₂ fun (c d : Nat) =>
        @DomainTheory.NeighbourhoodSystems.ApproximableMap.rel (Set α) (Set β)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
          (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P c)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd β W Q d)))
```

```
 (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
   {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
   (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
   (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W)
   (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W) {c d : Nat},
   Iff
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel (Set α) (Set β)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
       (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P c)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd β W Q d))
     (∀ (a : Nat),
       @Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.Recursive.
decodeList c) a →
         ∃ (b : Nat),
           And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.
Recursive.decodeList d) b)
             (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α β V W f
               (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P a
)
               (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W Q b
)))))
(∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
 {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
 (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W) {L₁ : List (Set α
)} {L₂ : List (Set β)},
 (∀ (X : Set α),
    @Membership.mem (Set α) (List (Set α)) (@List.instMembership (Set α)) L₁ X →
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X) →
   (∀ (Y : Set β),
      @Membership.mem (Set β) (List (Set β)) (@List.instMembership (Set β)) L₂ Y →
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β W Y) →
     Iff
       (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel (Set α) (Set β)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
         (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)
         (⋃ (X : Set α),
           ⋃ (_ : @Membership.mem (Set α) (List (Set α)) (@List.instMembership (Set
 α)) L₁ X),
             @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V X)
         (⋃ (Y : Set β),
           ⋃ (_ : @Membership.mem (Set β) (List (Set β)) (@List.instMembership (Set
 β)) L₂ Y),
             @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet β W Y))
       (∀ (X : Set α),
         @Membership.mem (Set α) (List (Set α)) (@List.instMembership (Set α)) L₁ X
 →
           ∃ (Y : Set β),
             And (@Membership.mem (Set β) (List (Set β)) (@List.instMembership (Set
 β)) L₂ Y)
               (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α β V W f X
 Y)))
```

```
(@And.intro
  (And
    (And
      (And
        (And
          (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
            {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
            (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W),
            @Eq
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set β)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W))
                (@DomainTheory.NeighbourhoodSystems.funSpace (Set α) (Set β)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W)))
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set β)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W))
                (@DomainTheory.NeighbourhoodSystems.funSpace α β V W)
                (@DomainTheory.NeighbourhoodSystems.funSpace (Set α) (Set β)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W))
                (@DomainTheory.NeighbourhoodSystems.PFmapComb α β V W)
                (@DomainTheory.NeighbourhoodSystems.toFilter α β V W f))
              (@DomainTheory.NeighbourhoodSystems.toFilter (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β
 W)
                (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)))
          (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V : DomainTheory.
 NeighbourhoodSystems.NeighborhoodSystem α}
            {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
            {U : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
            (g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β ? W U)
            (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W),
            @Eq
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set ?)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain ?
 U))
              (@DomainTheory.NeighbourhoodSystems.PFmap α ? V U
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α β ? V W U
```

```
 g f))
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp (Set α) (Set
β) (Set ?)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β
 W)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain ?
 U)
              (@DomainTheory.NeighbourhoodSystems.PFmap β ? W U g)
              (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f))))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@DomainTheory.NeighbourhoodSystems.PFmap α α V V
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap α V))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))))
    (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
      {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
      (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W) (consV :
 Nat → Nat)
      (hconsVp : Nat.Primrec consV)
      (hconsVs :
        ∀ (a b : Nat),
          Iff (@Eq Nat (consV (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
instOfNatNat (nat_lit 1))))
            (∃ (k : Nat),
              @LE.le (Set α) (@Set.instLE α) (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
                (@Inter.inter (Set α) (@Set.instInter α)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P b))))
      (consW : Nat → Nat) (hconsWp : Nat.Primrec consW)
      (hconsWs :
        ∀ (a b : Nat),
          Iff (@Eq Nat (consW (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
instOfNatNat (nat_lit 1))))
            (∃ (k : Nat),
              @LE.le (Set β) (@Set.instLE β) (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X β W Q k)
                (@Inter.inter (Set β) (@Set.instInter β)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W
 Q a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W
 Q b))))
```

```
      {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W},
      @DomainTheory.NeighbourhoodSystems.ComputableMap α β V W P Q f →
        @DomainTheory.NeighbourhoodSystems.ComputableMap (Set α) (Set β)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation α
V P consV hconsVp hconsVs)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation β
W Q consW hconsWp hconsWs)
          (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)))
   (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
     {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
     (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
     (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W)
     {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W},
     @DomainTheory.NeighbourhoodSystems.ComputableMap α β V W P Q f →
       Domain.Recursive.REPred₂ fun (c d : Nat) =>
         @DomainTheory.NeighbourhoodSystems.ApproximableMap.rel (Set α) (Set β)
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
           (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P c)
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd β W Q d)))
 (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
   {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
   (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
   (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W)
   (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W) {c d : Nat},
   Iff
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel (Set α) (Set β)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
       (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P c)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd β W Q d))
     (∀ (a : Nat),
       @Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.Recursive.
decodeList c) a →
         ∃ (b : Nat),
           And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.
Recursive.decodeList d) b)
             (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α β V W f
               (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P a
)
               (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W Q b
))))
 (@And.intro
   (And
     (And
       (And
         (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
           {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
           (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W),
```

```
          @Eq
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W))
              (@DomainTheory.NeighbourhoodSystems.funSpace (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W)))
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W))
              (@DomainTheory.NeighbourhoodSystems.funSpace α β V W)
              (@DomainTheory.NeighbourhoodSystems.funSpace (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W))
              (@DomainTheory.NeighbourhoodSystems.PFmapComb α β V W)
              (@DomainTheory.NeighbourhoodSystems.toFilter α β V W f))
            (@DomainTheory.NeighbourhoodSystems.toFilter (Set α) (Set β)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β
 W)


              (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)))
        (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
          {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
          {U : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
          (g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β ? W U)
          (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W),
          @Eq
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set ?)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain ?
 U))
            (@DomainTheory.NeighbourhoodSystems.PFmap α ? V U
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α β ? V W U
 g f))
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp (Set α) (Set
β) (Set ?)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β
 W)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain ?
```

```
 U)
              (@DomainTheory.NeighbourhoodSystems.PFmap β ? W U g)
              (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f))))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@DomainTheory.NeighbourhoodSystems.PFmap α α V V
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap α V))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))))
    (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
      {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
      (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W) (consV :
 Nat → Nat)
      (hconsVp : Nat.Primrec consV)
      (hconsVs :
        ∀ (a b : Nat),
          Iff (@Eq Nat (consV (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
instOfNatNat (nat_lit 1))))
            (∃ (k : Nat),
              @LE.le (Set α) (@Set.instLE α) (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
                (@Inter.inter (Set α) (@Set.instInter α)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P b))))
      (consW : Nat → Nat) (hconsWp : Nat.Primrec consW)
      (hconsWs :
        ∀ (a b : Nat),
          Iff (@Eq Nat (consW (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
instOfNatNat (nat_lit 1))))
            (∃ (k : Nat),
              @LE.le (Set β) (@Set.instLE β) (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X β W Q k)
                (@Inter.inter (Set β) (@Set.instInter β)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W
 Q a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W
 Q b))))
      {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W},
      @DomainTheory.NeighbourhoodSystems.ComputableMap α β V W P Q f →
        @DomainTheory.NeighbourhoodSystems.ComputableMap (Set α) (Set β)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation α
V P consV hconsVp hconsVs)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation β
```

```
W Q consW hconsWp hconsWs)
          (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)))
  (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
    {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
    (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W)
    {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W},
    @DomainTheory.NeighbourhoodSystems.ComputableMap α β V W P Q f →
      Domain.Recursive.REPred₂ fun (c d : Nat) =>
        @DomainTheory.NeighbourhoodSystems.ApproximableMap.rel (Set α) (Set β)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
          (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P c)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd β W Q d))
  (@And.intro
    (And
      (And
        (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
          {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
          (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W),
          @Eq
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W))
              (@DomainTheory.NeighbourhoodSystems.funSpace (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W)))
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W))
              (@DomainTheory.NeighbourhoodSystems.funSpace α β V W)
              (@DomainTheory.NeighbourhoodSystems.funSpace (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W))
              (@DomainTheory.NeighbourhoodSystems.PFmapComb α β V W)
              (@DomainTheory.NeighbourhoodSystems.toFilter α β V W f))
            (@DomainTheory.NeighbourhoodSystems.toFilter (Set α) (Set β)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β
 W)
              (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)))
```

```
        (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
          {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
          {U : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
          (g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β ? W U)
          (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W),
          @Eq
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set ?)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain ?
 U))
            (@DomainTheory.NeighbourhoodSystems.PFmap α ? V U
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α β ? V W U
 g f))
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp (Set α) (Set
β) (Set ?)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β
 W)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain ?
 U)
              (@DomainTheory.NeighbourhoodSystems.PFmap β ? W U g)
              (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f))))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@DomainTheory.NeighbourhoodSystems.PFmap α α V V
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap α V))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))))
    (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
      {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
      (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W) (consV :
 Nat → Nat)
      (hconsVp : Nat.Primrec consV)
      (hconsVs :
        ∀ (a b : Nat),
          Iff (@Eq Nat (consV (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
instOfNatNat (nat_lit 1))))
            (∃ (k : Nat),
              @LE.le (Set α) (@Set.instLE α) (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X α V P k)
                (@Inter.inter (Set α) (@Set.instInter α)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
 P a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
```

```
 P b))))
      (consW : Nat → Nat) (hconsWp : Nat.Primrec consW)
      (hconsWs :
        ∀ (a b : Nat),
          Iff (@Eq Nat (consW (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
instOfNatNat (nat_lit 1))))
            (∃ (k : Nat),
              @LE.le (Set β) (@Set.instLE β) (@DomainTheory.NeighbourhoodSystems.
ComputablePresentation.X β W Q k)
                (@Inter.inter (Set β) (@Set.instInter β)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W
 Q a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W
 Q b))))
      {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W},
      @DomainTheory.NeighbourhoodSystems.ComputableMap α β V W P Q f →
        @DomainTheory.NeighbourhoodSystems.ComputableMap (Set α) (Set β)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation α
V P consV hconsVp hconsVs)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation β
W Q consW hconsWp hconsWs)
          (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f))
    (@And.intro
      (And
        (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
          {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
          (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W),
          @Eq
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W))
              (@DomainTheory.NeighbourhoodSystems.funSpace (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W)))
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W))
              (@DomainTheory.NeighbourhoodSystems.funSpace α β V W)
              (@DomainTheory.NeighbourhoodSystems.funSpace (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 β W))
              (@DomainTheory.NeighbourhoodSystems.PFmapComb α β V W)
```

```
              (@DomainTheory.NeighbourhoodSystems.toFilter α β V W f))
            (@DomainTheory.NeighbourhoodSystems.toFilter (Set α) (Set β)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β
 W)
              (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)))
        (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
          {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
          {U : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
          (g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β ? W U)
          (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W),
          @Eq
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set ?)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain ?
 U))
            (@DomainTheory.NeighbourhoodSystems.PFmap α ? V U
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α β ? V W U
 g f))
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp (Set α) (Set
β) (Set ?)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β
 W)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain ?
 U)
              (@DomainTheory.NeighbourhoodSystems.PFmap β ? W U g)
              (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f))))
      (∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem
α),
        @Eq
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@DomainTheory.NeighbourhoodSystems.PFmap α α V V
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap α V))
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
)))
      (@And.intro
        (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
          {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
          (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W),
          @Eq
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
```

```
β W))
              (@DomainTheory.NeighbourhoodSystems.funSpace (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
β W)))
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
β W))
              (@DomainTheory.NeighbourhoodSystems.funSpace α β V W)
              (@DomainTheory.NeighbourhoodSystems.funSpace (Set α) (Set β)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
β W))
              (@DomainTheory.NeighbourhoodSystems.PFmapComb α β V W)
              (@DomainTheory.NeighbourhoodSystems.toFilter α β V W f))
            (@DomainTheory.NeighbourhoodSystems.toFilter (Set α) (Set β)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β
W)
              (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)))
          (∀ {α : Type u_1} {β : Type u_2} {? : Type u_3} {V : DomainTheory.
NeighbourhoodSystems.NeighborhoodSystem α}
            {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
            {U : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem ?}
            (g : @DomainTheory.NeighbourhoodSystems.ApproximableMap β ? W U)
            (f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W),
            @Eq
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap (Set α) (Set ?)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain ?
U))
              (@DomainTheory.NeighbourhoodSystems.PFmap α ? V U
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α β ? V W U
g f))
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp (Set α) (Set
β) (Set ?)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β
W)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain ?
U)
                (@DomainTheory.NeighbourhoodSystems.PFmap β ? W U g)
                (@DomainTheory.NeighbourhoodSystems.PFmap α β V W f)))
          @DomainTheory.NeighbourhoodSystems.PFmapComb_toElementMap @DomainTheory.
NeighbourhoodSystems.PFmap_comp)
        @DomainTheory.NeighbourhoodSystems.PFmap_idMap)
      @DomainTheory.NeighbourhoodSystems.PFmap_isComputable)
```

```
      @DomainTheory.NeighbourhoodSystems.PFmap_isComputable_Ypd)
    @DomainTheory.NeighbourhoodSystems.PFmap_rel_Ypd_iff)
  @DomainTheory.NeighbourhoodSystems.PFmap_rel_fin
end

end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 7.19. Prove that $D \mapsto \mathbb{P}D$ is a functor by defining for each $f : D \to E$ a mapping

$$\mathbb{P}f : \mathbb{P}D \to \mathbb{P}E$$

by the formula

$$\bigcup_{i<n} \downarrow X_i \quad \mathbb{P}f \quad \bigcup_{j<m} \downarrow Y_j \quad \text{iff} \quad \forall i < n \exists j < m.\, X_i f Y_j\,.$$

Be sure to check that $\mathbb{P}f$ is approximable and that $\mathbb{P}$ preserves identity maps and composition. If f is computable, is $\mathbb{P}f$? Is there a combinator $\lambda f.\, \mathbb{P}f$? What is

$$\mathbb{P}f(\{x, y\}) = ??$$

3.8.22 Exercise 7.20 — union on power domains

Exercise_7_20.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_11
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_10

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_19

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*}

def unionMap (V : NeighborhoodSystem α) :
    ApproximableMap V.PowerDomain.PowerDomain V.PowerDomain where
  rel A B := V.PowerDomain.PDmem A ∧ V.PDmem B ∧ ∀ S ∈ A, ∀ X ∈ S, ∃ Y ∈ B, X ⊆ Y
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := by
    refine ⟨V.PowerDomain.PDmem_master, V.PDmem_master, ?_⟩
    intro S hS X hX
    simp only [mem_upSet] at hS
    exact ⟨V.master, ⟨V.master_mem, subset_rfl⟩, V.sub_master (V.PDmem_mem hS.1 hX)⟩
```

```
  inter_right := by
    rintro A B B' ⟨hA, hB, hbody⟩ ⟨-, hB', hbody'⟩
    refine ⟨hA, V.PDmem_inter hB hB', ?_⟩
    intro S hS X hX
    obtain ⟨Y, hYB, hXY⟩ := hbody S hS X hX
    obtain ⟨Y', hY'B', hXY'⟩ := hbody' S hS X hX
    have hXmem : V.mem X := V.PDmem_mem (V.PowerDomain.PDmem_mem hA hS) hX
    have hYmem : V.mem Y := V.PDmem_mem hB hYB
    have hY'mem : V.mem Y' := V.PDmem_mem hB' hY'B'
    have hsub : X ⊆ Y ∩ Y' := Set.subset_inter hXY hXY'
    have hinmem : V.mem (Y ∩ Y') := V.inter_mem hYmem hY'mem hXmem hsub
    exact ⟨Y ∩ Y', Set.mem_inter
      (V.PDmem_down hB hYB Set.inter_subset_left hinmem)
      (V.PDmem_down hB' hY'B' Set.inter_subset_right hinmem), hsub⟩
  mono := by
    rintro A A' B B' ⟨_, _, hbody⟩ hA'A hBB' hA' hB'
    refine ⟨hA', hB', ?_⟩
    intro S hS X hX
    obtain ⟨Y, hYB, hXY⟩ := hbody S (hA'A hS) X hX
    exact ⟨Y, hBB' hYB, hXY⟩

@[simp] theorem unionMap_rel {V : NeighborhoodSystem α} {A : Set (Set (Set α))} {B :
    Set (Set α)} :
    (unionMap V).rel A B ↔ V.PowerDomain.PDmem A ∧ V.PDmem B ∧ ∀ S ∈ A, ∀ X ∈ S, ∃ Y
    ∈ B, X ⊆ Y :=
  Iff.rfl

theorem unionMap_rel_Ypd_iff {V : NeighborhoodSystem α} (P : ComputablePresentation V)
    (Q : ComputablePresentation V.PowerDomain) (hQ : ∀ c, Q.X c = V.Ypd P c) {n m : ℕ}
     :
    (unionMap V).rel (V.PowerDomain.Ypd Q n) (V.Ypd P m)
      ↔ ∀ c ∈ decodeList n, ∀ a ∈ decodeList c, ∃ b ∈ decodeList m, P.X a ⊆ P.X b :=
    by
  constructor
  · rintro ⟨-, -, hbody⟩ c hc a ha
    have hSmem : Q.X c ∈ V.PowerDomain.Ypd Q n :=
      (V.PowerDomain.mem_Ypd Q).mpr ⟨c, hc, Q.mem_X c, subset_rfl⟩
    have hXinS : P.X a ∈ Q.X c := by
      rw [hQ c]; exact (V.mem_Ypd P).mpr ⟨a, ha, P.mem_X a, subset_rfl⟩
    obtain ⟨Y, hYB, hXY⟩ := hbody (Q.X c) hSmem (P.X a) hXinS
    obtain ⟨b, hb, hYin⟩ := (V.mem_Ypd P).mp hYB
    exact ⟨b, hb, hXY.trans hYin.2⟩
  · intro hgen
    refine ⟨V.PowerDomain.Ypd_isPDmem Q n, V.Ypd_isPDmem P m, ?_⟩
    intro S hS X hX
    obtain ⟨c, hc, hScod⟩ := (V.PowerDomain.mem_Ypd Q).mp hS
    have hXinQ : X ∈ Q.X c := hScod.2 hX
    rw [hQ c] at hXinQ
    obtain ⟨a, ha, hXin⟩ := (V.mem_Ypd P).mp hXinQ
    obtain ⟨b, hb, hab⟩ := hgen c hc a ha
    exact ⟨P.X b, (V.mem_Ypd P).mpr ⟨b, hb, P.mem_X b, subset_rfl⟩, hXin.2.trans hab⟩

theorem ypd_zero_subset_inter {V : NeighborhoodSystem α} (P : ComputablePresentation V
    ) (a b : ℕ) :
    V.Ypd P 0 ⊆ V.Ypd P a ∩ V.Ypd P b := by
  rw [V.Ypd_zero P]
```

```
  exact Set.empty_subset _

theorem unionMap_isComputable {V : NeighborhoodSystem α} (P : ComputablePresentation V
    )
    (consV : ℕ → ℕ) (hconsVp : Nat.Primrec consV)
    (hconsVs : ∀ a b, consV (Nat.pair a b) = 1 ↔ ∃ k, P.X k ⊆ P.X a ∩ P.X b) :
    ComputableMap
      (V.PowerDomain.PDPresentation (V.PDPresentation P consV hconsVp hconsVs)
        (fun _ => 1) (Nat.Primrec.const 1)
        (fun a b => ⟨fun _ => ⟨0, ypd_zero_subset_inter P a b⟩, fun _ => rfl⟩))
      (V.PDPresentation P consV hconsVp hconsVs)
      (unionMap V) := by
  constructor
  have hrd : RecDecidable₂ (fun n m => ∀ c ∈ decodeList n, ∀ a ∈ decodeList c,
      ∃ b ∈ decodeList m, P.X a ⊆ P.X b) := (V.subCode_computable P).bForallList
  have key : RecDecidable₂ (fun n m => (unionMap V).rel
      (V.PowerDomain.Ypd (V.PDPresentation P consV hconsVp hconsVs) n) (V.Ypd P m)) :=
    by
    refine RecDecidable.of_iff (fun t => ?_) hrd
    exact unionMap_rel_Ypd_iff P (V.PDPresentation P consV hconsVp hconsVs) (fun _ =>
    rfl)
  exact key.re

theorem unionMap_rel_fin (V : NeighborhoodSystem α) {LS : List (List (Set α))} {LY :
    List (Set α)}
    (hLS : ∀ l ∈ LS, ∀ X ∈ l, V.mem X) (hLY : ∀ Y ∈ LY, V.mem Y) :
    (unionMap V).rel (⋃ l ∈ LS, V.PowerDomain.upSet (⋃ X ∈ l, V.upSet X)) (⋃ Y ∈ LY,
    V.upSet Y)
      ↔ ∀ l ∈ LS, ∀ X ∈ l, ∃ Y ∈ LY, X ⊆ Y := by
  constructor
  · rintro ⟨-, -, hbody⟩ l hl X hX
    have hXmem : V.mem X := hLS l hl X hX
    have hSinA : (⋃ X ∈ l, V.upSet X) ∈ ⋃ l ∈ LS, V.PowerDomain.upSet (⋃ X ∈ l, V.
    upSet X) :=
      Set.mem_iUnion₂.mpr ⟨l, hl, (⟨l, hLS l hl, rfl⟩ : V.PDmem _), subset_rfl⟩
    have hXinS : X ∈ ⋃ X' ∈ l, V.upSet X' := (V.mem_PDunion).mpr ⟨X, hX, hXmem,
    subset_rfl⟩
    obtain ⟨Y, hYB, hXY⟩ := hbody _ hSinA X hXinS
    obtain ⟨Y', hY', hYin⟩ := (V.mem_PDunion).mp hYB
    exact ⟨Y', hY', hXY.trans hYin.2⟩
  · intro hgen
    refine ⟨?_, ⟨LY, hLY, rfl⟩, ?_⟩
    · refine ⟨LS.map (fun l => ⋃ X ∈ l, V.upSet X), ?_, ?_⟩
      · intro S hS
        obtain ⟨l, hl, rfl⟩ := List.mem_map.mp hS
        exact ⟨l, hLS l hl, rfl⟩
      · ext z
        simp only [Set.mem_iUnion, List.mem_map, exists_prop]
        constructor
        · rintro ⟨l, hl, hz⟩
          exact ⟨_, ⟨l, hl, rfl⟩, hz⟩
        · rintro ⟨S, ⟨l, hl, rfl⟩, hz⟩
          exact ⟨l, hl, hz⟩
    · intro S hS X hX
      obtain ⟨l, hl, hSin⟩ := Set.mem_iUnion₂.mp hS
      have hXin : X ∈ ⋃ X' ∈ l, V.upSet X' := hSin.2 hX
```

```
      obtain ⟨X', hX', hXmem⟩ := (V.mem_PDunion).mp hXin
      obtain ⟨Y, hY, hX'Y⟩ := hgen l hl X' hX'
      exact ⟨Y, (V.mem_PDunion).mpr ⟨Y, hY, hLY Y hY, subset_rfl⟩, hXmem.2.trans hX'Y⟩

end

section
set_option linter.unusedVariables false

theorem example_720.{u_1} : And
  (And
    (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V) (consV : Nat
    → Nat)
      (hconsVp : Nat.Primrec consV)
      (hconsVs :
        ∀ (a b : Nat),
          Iff (@Eq Nat (consV (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
    instOfNatNat (nat_lit 1))))
            (∃ (k : Nat),
              @LE.le (Set α) (@Set.instLE α) (@DomainTheory.NeighbourhoodSystems.
    ComputablePresentation.X α V P k)
                (@Inter.inter (Set α) (@Set.instInter α)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P a
    )
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P b
    )))),
      @DomainTheory.NeighbourhoodSystems.ComputableMap (Set (Set α)) (Set α)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain (Set α)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation (Set α)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation α V P
    consV hconsVp hconsVs)
          (fun (x : Nat) => @OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
          (Nat.Primrec.const (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
    ) fun (a b : Nat) =>
          @Iff.intro
            (@Eq Nat (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
              (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
            (∃ (k : Nat),
              @LE.le (Set (Set α)) (@Set.instLE (Set α))
                (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set α)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
     V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    PDPresentation α V P consV hconsVp hconsVs) k)
                (@Inter.inter (Set (Set α)) (@Set.instInter (Set α))
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
     α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    PDPresentation α V P consV hconsVp hconsVs)
                    a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set α)
```

```
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp hconsVs)
                b)))
        (fun
            (x :
              @Eq Nat (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
                (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))) =>
          @Exists.intro Nat
            (fun (k : Nat) =>
              @LE.le (Set (Set α)) (@Set.instLE (Set α))
                (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set
α)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp hconsVs)
                  k)
                (@Inter.inter (Set (Set α)) (@Set.instInter (Set α))
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (
Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp
                      hconsVs)
                    a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (
Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp
                      hconsVs)
                    b)))
            (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))
            (@DomainTheory.NeighbourhoodSystems.ypd_zero_subset_inter α V P a b))
        fun
          (x :
            ∃ (k : Nat),
              @LE.le (Set (Set α)) (@Set.instLE (Set α))
                (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set
α)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp hconsVs)
                  k)
                (@Inter.inter (Set (Set α)) (@Set.instInter (Set α))
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (
Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp
```

```
                      hconsVs)
                     a)
                   (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (
Set α)
                     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp
                      hconsVs)
                     b))) =>
         @rfl Nat (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation α V P
consV hconsVp hconsVs)
     (@DomainTheory.NeighbourhoodSystems.unionMap α V))
 (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
   (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
   (Q :
     @DomainTheory.NeighbourhoodSystems.ComputablePresentation (Set α)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)),
   (∀ (c : Nat),
       @Eq (Set (Set α))
         (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set α)
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
Q c)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P c)) →
     ∀ {n m : Nat},
       Iff
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel (Set (Set α)) (Set
 α)
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain (Set
α)
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
           (@DomainTheory.NeighbourhoodSystems.unionMap α V)
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd (Set α)
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
) Q n)
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P m))
         (∀ (c : Nat),
           @Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.
Recursive.decodeList n) c →
             ∀ (a : Nat),
               @Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.
Recursive.decodeList c) a →
                 ∃ (b : Nat),
                   And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (
Domain.Recursive.decodeList m) b)
                     (@LE.le (Set α) (@Set.instLE α)
                       (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
 α V P a)
                       (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
 α V P b)))))
(∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {LS :
  List (List (Set α))}
  {LY : List (Set α)},
```

```
  (∀ (l : List (Set α)),
      @Membership.mem (List (Set α)) (List (List (Set α))) (@List.instMembership (
  List (Set α))) LS l →
       ∀ (X : Set α),
         @Membership.mem (Set α) (List (Set α)) (@List.instMembership (Set α)) l X
  →
           @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X) →
    (∀ (Y : Set α),
       @Membership.mem (Set α) (List (Set α)) (@List.instMembership (Set α)) LY Y
  →
         @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y) →
     Iff
       (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel (Set (Set α)) (Set α
  )
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain (Set α)
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V))
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
         (@DomainTheory.NeighbourhoodSystems.unionMap α V)
         (⋃ (l : List (Set α)),
           ⋃ (_ : @Membership.mem (List (Set α)) (List (List (Set α))) (@List.
  instMembership (List (Set α))) LS l),
             @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet (Set α)
               (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
   V)
               (⋃ (X : Set α),
                 ⋃ (_ : @Membership.mem (Set α) (List (Set α)) (@List.
  instMembership (Set α)) l X),
                    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V
  X))
         (⋃ (Y : Set α),
           ⋃ (_ : @Membership.mem (Set α) (List (Set α)) (@List.instMembership (Set
   α)) LY Y),
             @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V Y))
       (∀ (l : List (Set α)),
         @Membership.mem (List (Set α)) (List (List (Set α))) (@List.instMembership
   (List (Set α))) LS l →
           ∀ (X : Set α),
             @Membership.mem (Set α) (List (Set α)) (@List.instMembership (Set α))
  l X →
               ∃ (Y : Set α),
                 And (@Membership.mem (Set α) (List (Set α)) (@List.instMembership
  (Set α)) LY Y)
                     (@LE.le (Set α) (@Set.instLE α) X Y))) :=
@And.intro
(And
  (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V) (consV : Nat
   → Nat)
    (hconsVp : Nat.Primrec consV)
    (hconsVs :
      ∀ (a b : Nat),
        Iff (@Eq Nat (consV (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
  instOfNatNat (nat_lit 1))))
          (∃ (k : Nat),
            @LE.le (Set α) (@Set.instLE α) (@DomainTheory.NeighbourhoodSystems.
  ComputablePresentation.X α V P k)
```

```
            (@Inter.inter (Set α) (@Set.instInter α)
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P a
)
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P b
)))),
  @DomainTheory.NeighbourhoodSystems.ComputableMap (Set (Set α)) (Set α)
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain (Set α)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V))
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation (Set α)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation α V P
consV hconsVp hconsVs)
      (fun (x : Nat) => @OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
      (Nat.Primrec.const (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
) fun (a b : Nat) =>
      @Iff.intro
        (@Eq Nat (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
          (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
        (∃ (k : Nat),
          @LE.le (Set (Set α)) (@Set.instLE (Set α))
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set α)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp hconsVs) k)
            (@Inter.inter (Set (Set α)) (@Set.instInter (Set α))
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp hconsVs)
                a)
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp hconsVs)
                b)))
        (fun
            (x :
              @Eq Nat (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
                (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))) =>
          @Exists.intro Nat
            (fun (k : Nat) =>
              @LE.le (Set (Set α)) (@Set.instLE (Set α))
                (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set
α)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp hconsVs)
                  k)
                (@Inter.inter (Set (Set α)) (@Set.instInter (Set α))
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (
Set α)
```

```
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp
                      hconsVs)
                    a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (
Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp
                      hconsVs)
                    b)))
            (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))
            (@DomainTheory.NeighbourhoodSystems.ypd_zero_subset_inter α V P a b))
        fun
          (x :
            ∃ (k : Nat),
              @LE.le (Set (Set α)) (@Set.instLE (Set α))
                (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set
α)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp hconsVs)
                  k)
                (@Inter.inter (Set (Set α)) (@Set.instInter (Set α))
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (
Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp
                      hconsVs)
                    a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (
Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp
                      hconsVs)
                    b))) =>
        @rfl Nat (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation α V P
consV hconsVp hconsVs)
    (@DomainTheory.NeighbourhoodSystems.unionMap α V))
(∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
  (Q :
    @DomainTheory.NeighbourhoodSystems.ComputablePresentation (Set α)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)),
  (∀ (c : Nat),
      @Eq (Set (Set α))
        (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set α)
```

```
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
 Q c)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P c)) →
      ∀ {n m : Nat},
        Iff
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel (Set (Set α)) (Set
  α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain (Set
 α)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
 ))
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
            (@DomainTheory.NeighbourhoodSystems.unionMap α V)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd (Set α)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
 ) Q n)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P m))
          (∀ (c : Nat),
            @Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.
 Recursive.decodeList n) c →
              ∀ (a : Nat),
                @Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.
 Recursive.decodeList c) a →
                  ∃ (b : Nat),
                    And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (
 Domain.Recursive.decodeList m) b)
                      (@LE.le (Set α) (@Set.instLE α)
                        (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
  α V P a)
                        (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
  α V P b)))))
(∀ {α : Type u_1} (V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α) {LS :
   List (List (Set α))}
  {LY : List (Set α)},
  (∀ (l : List (Set α)),
      @Membership.mem (List (Set α)) (List (List (Set α))) (@List.instMembership (
 List (Set α))) LS l →
        ∀ (X : Set α),


          @Membership.mem (Set α) (List (Set α)) (@List.instMembership (Set α)) l X
 →
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X) →
    (∀ (Y : Set α),
        @Membership.mem (Set α) (List (Set α)) (@List.instMembership (Set α)) LY Y
 →
          @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V Y) →
      Iff
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel (Set (Set α)) (Set α
 )
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
          (@DomainTheory.NeighbourhoodSystems.unionMap α V)
          (⋃ (l : List (Set α)),
            ⋃ (_ : @Membership.mem (List (Set α)) (List (List (Set α))) (@List.
 instMembership (List (Set α))) LS l),
```

```
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet (Set α)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (⋃ (X : Set α),
                ⋃ (_ : @Membership.mem (Set α) (List (Set α)) (@List.
 instMembership (Set α)) l X),
                   @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V
 X))
        (⋃ (Y : Set α),
          ⋃ (_ : @Membership.mem (Set α) (List (Set α)) (@List.instMembership (Set
 α)) LY Y),
            @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V Y))
      (∀ (l : List (Set α)),
        @Membership.mem (List (Set α)) (List (List (Set α))) (@List.instMembership
 (List (Set α))) LS l →
          ∀ (X : Set α),
            @Membership.mem (Set α) (List (Set α)) (@List.instMembership (Set α))
 l X →
              ∃ (Y : Set α),
                And (@Membership.mem (Set α) (List (Set α)) (@List.instMembership
 (Set α)) LY Y)
                    (@LE.le (Set α) (@Set.instLE α) X Y)))
(@And.intro
 (∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
   (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V) (consV : Nat
 → Nat)
   (hconsVp : Nat.Primrec consV)
   (hconsVs :
     ∀ (a b : Nat),
       Iff (@Eq Nat (consV (Nat.pair a b)) (@OfNat.ofNat Nat (nat_lit 1) (
 instOfNatNat (nat_lit 1))))
         (∃ (k : Nat),
           @LE.le (Set α) (@Set.instLE α) (@DomainTheory.NeighbourhoodSystems.
 ComputablePresentation.X α V P k)
             (@Inter.inter (Set α) (@Set.instInter α)
               (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P a
 )
               (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P b
 )))),
   @DomainTheory.NeighbourhoodSystems.ComputableMap (Set (Set α)) (Set α)
     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain (Set α)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V))
     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
     (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation (Set α)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation α V P
 consV hconsVp hconsVs)
       (fun (x : Nat) => @OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
       (Nat.Primrec.const (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
 ) fun (a b : Nat) =>
       @Iff.intro
         (@Eq Nat (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
           (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
         (∃ (k : Nat),
           @LE.le (Set (Set α)) (@Set.instLE (Set α))
             (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set α)
```

```
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α
 V)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp hconsVs) k)
            (@Inter.inter (Set (Set α)) (@Set.instInter (Set α))
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp hconsVs)
                a)
              (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set α)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
 α V)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp hconsVs)
                b)))
        (fun
            (x :
              @Eq Nat (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
                (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))) =>
          @Exists.intro Nat
            (fun (k : Nat) =>
              @LE.le (Set (Set α)) (@Set.instLE (Set α))
                (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set
α)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp hconsVs)
                  k)
                (@Inter.inter (Set (Set α)) (@Set.instInter (Set α))
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (
Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp
                      hconsVs)
                    a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (
Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp
                      hconsVs)
                    b)))
            (@OfNat.ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0)))
            (@DomainTheory.NeighbourhoodSystems.ypd_zero_subset_inter α V P a b))
        fun
          (x :
            ∃ (k : Nat),
              @LE.le (Set (Set α)) (@Set.instLE (Set α))
                (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set
α)
```

```
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp hconsVs)
                  k)
                (@Inter.inter (Set (Set α)) (@Set.instInter (Set α))
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (
Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp
                      hconsVs)
                    a)
                  (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (
Set α)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PowerDomain α V)
                    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
PDPresentation α V P consV hconsVp
                      hconsVs)
                    b))) =>
        @rfl Nat (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PDPresentation α V P
consV hconsVp hconsVs)
    (@DomainTheory.NeighbourhoodSystems.unionMap α V))
(∀ {α : Type u_1} {V : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
  (Q :
    @DomainTheory.NeighbourhoodSystems.ComputablePresentation (Set α)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)),
  (∀ (c : Nat),
      @Eq (Set (Set α))
        (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X (Set α)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
Q c)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P c)) →
    ∀ {n m : Nat},
      Iff
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel (Set (Set α)) (Set
 α)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain (Set
α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
))
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
          (@DomainTheory.NeighbourhoodSystems.unionMap α V)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd (Set α)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V
) Q n)
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P m))
        (∀ (c : Nat),
          @Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.
Recursive.decodeList n) c →
            ∀ (a : Nat),
              @Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.
```

```
    Recursive.decodeList c) a →
                    ∃ (b : Nat),
                      And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (
    Domain.Recursive.decodeList m) b)
                        (@LE.le (Set α) (@Set.instLE α)
                          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
     α V P a)
                          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
     α V P b))))
    @DomainTheory.NeighbourhoodSystems.unionMap_isComputable @DomainTheory.
    NeighbourhoodSystems.unionMap_rel_Ypd_iff)
  @DomainTheory.NeighbourhoodSystems.unionMap_rel_fin
end

end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 7.20. Show that there is a combinator

$$\text{union} : \mathbb{P}(\mathbb{P}D) \to \mathbb{P}D$$

where for suitable neighbourhoods

$$\bigcup_{i<n} \downarrow \Big(\bigcup_{j<m_i} \downarrow X_{ij} \Big) \quad \text{union} \quad \bigcup_{k<q} \downarrow Y_k \quad \text{iff} \quad \forall i < n \forall j < m_i \exists k < q.\, X_{ij} \subseteq Y_k\,.$$

Is union computable if D is effectively given? What is

$$\text{union}(\{\{x\},\{y,z\}\}) = ??$$

Are $\mathbb{P}(\mathbb{P}D)$ and $\mathbb{P}D$ generally isomorphic??

3.8.23 Exercise 7.21 — distributing the power domain

Exercise_7_21.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_19
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_11
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_10
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Example_6_1
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Theorem_6_9

@[expose] public section

section
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem Domain.Recursive ApproximableMap
```

```
variable {α β : Type*}

def papplyEval (V : NeighborhoodSystem α) (W : NeighborhoodSystem β) :
    ApproximableMap₂ (funSpace V W).PowerDomain V.PowerDomain W.PowerDomain where
  rel ? A B := (funSpace V W).PDmem ? ∧ V.PDmem A ∧ W.PDmem B ∧
    ∀ G ∈ ?, ∀ X ∈ A, ∃ Y ∈ B, (eval V W).rel G X Y
  rel_dom₀ h := h.1
  rel_dom₁ h := h.2.1
  rel_cod h := h.2.2.1
  master_rel := by
    refine ⟨(funSpace V W).PDmem_master, V.PDmem_master, W.PDmem_master, ?_⟩
    intro G hG X hX
    simp only [mem_upSet] at hG hX
    refine ⟨W.master, ⟨W.master_mem, subset_rfl⟩, ?_⟩
    exact ⟨hG.1, hX.1, W.master_mem,
      fun f hf => f.mono f.master_rel (V.sub_master hX.1) subset_rfl hX.1 W.master_mem⟩
  inter_right := by
    rintro ? A B B' ⟨h?, hA, hB, hbody⟩ ⟨-, -, hB', hbody'⟩
    refine ⟨h?, hA, W.PDmem_inter hB hB', ?_⟩
    intro G hG X hX
    obtain ⟨Y, hYB, hrel⟩ := hbody G hG X hX
    obtain ⟨Y', hY'B', hrel'⟩ := hbody' G hG X hX
    have hinmem : W.mem (Y ∩ Y') := (eval V W).rel_cod ((eval V W).inter_right hrel
   hrel')
    exact ⟨Y ∩ Y', Set.mem_inter
      (W.PDmem_down hB hYB Set.inter_subset_left hinmem)
      (W.PDmem_down hB' hY'B' Set.inter_subset_right hinmem),
      (eval V W).inter_right hrel hrel'⟩
  mono := by
    rintro ? ?' A A' B B' ⟨_, _, _, hbody⟩ h?'? hA'A hBB' h?' hA' hB'
    refine ⟨h?', hA', hB', ?_⟩
    intro G hG X hX
    obtain ⟨Y, hYB, hrel⟩ := hbody G (h?'? hG) X (hA'A hX)
    exact ⟨Y, hBB' hYB, hrel⟩

@[simp] theorem papplyEval_rel {V : NeighborhoodSystem α} {W : NeighborhoodSystem β}
    {? : Set (Set (ApproximableMap V W))} {A : Set (Set α)} {B : Set (Set β)} :
    (papplyEval V W).rel ? A B ↔ (funSpace V W).PDmem ? ∧ V.PDmem A ∧ W.PDmem B ∧
      ∀ G ∈ ?, ∀ X ∈ A, ∃ Y ∈ B, (eval V W).rel G X Y := Iff.rfl

def papplyB (V : NeighborhoodSystem α) (W : NeighborhoodSystem β) :
    ApproximableMap (prod (funSpace V W).PowerDomain V.PowerDomain) W.PowerDomain :=
  ofMap₂ (papplyEval V W)

def papply (V : NeighborhoodSystem α) (W : NeighborhoodSystem β) :
    ApproximableMap (funSpace V W).PowerDomain (funSpace V.PowerDomain W.PowerDomain)
    :=
  curry (papplyB V W)

theorem papplyEval_rel_Ypd_iff {V : NeighborhoodSystem α} {W : NeighborhoodSystem β}
    (Pf : ComputablePresentation (funSpace V W)) (P : ComputablePresentation V)
    (Q : ComputablePresentation W) {?c Ac Bc : ℕ} :
    (papplyEval V W).rel ((funSpace V W).Ypd Pf ?c) (V.Ypd P Ac) (W.Ypd Q Bc)
      ↔ ∀ g ∈ decodeList ?c, ∀ x ∈ decodeList Ac, ∃ y ∈ decodeList Bc,
          (eval V W).rel (Pf.X g) (P.X x) (Q.X y) := by
  constructor
```

```
  · rintro ⟨-, -, -, hbody⟩ g hg x hx
    have hGin : Pf.X g ∈ (funSpace V W).Ypd Pf ?c :=
      ((funSpace V W).mem_Ypd Pf).mpr ⟨g, hg, Pf.mem_X g, subset_rfl⟩
    have hXin : P.X x ∈ V.Ypd P Ac := (V.mem_Ypd P).mpr ⟨x, hx, P.mem_X x, subset_rfl⟩
    obtain ⟨Y, hYin, hrel⟩ := hbody (Pf.X g) hGin (P.X x) hXin
    obtain ⟨b, hb, hYmem, hYsub⟩ := (W.mem_Ypd Q).mp hYin
    exact ⟨b, hb, (eval V W).mono hrel subset_rfl subset_rfl hYsub
      ((eval V W).rel_dom₀ hrel) ((eval V W).rel_dom₁ hrel) (Q.mem_X b)⟩
  · intro hgen
    refine ⟨(funSpace V W).Ypd_isPDmem Pf ?c, V.Ypd_isPDmem P Ac, W.Ypd_isPDmem Q Bc, ?
    _⟩
    intro G hGin X hXin
    obtain ⟨g, hg, hGmem, hGsub⟩ := ((funSpace V W).mem_Ypd Pf).mp hGin
    obtain ⟨x, hx, hXmem, hXsub⟩ := (V.mem_Ypd P).mp hXin
    obtain ⟨y, hy, hrel⟩ := hgen g hg x hx
    exact ⟨Q.X y, (W.mem_Ypd Q).mpr ⟨y, hy, Q.mem_X y, subset_rfl⟩,
      (eval V W).mono hrel hGsub hXsub subset_rfl hGmem hXmem (Q.mem_X y)⟩

theorem papplyEval_step_witness {V : NeighborhoodSystem α} {W : NeighborhoodSystem β}
    {X₀ : Set α} {Y₀ : Set β} (hX₀ : V.mem X₀) (hY₀ : W.mem Y₀) :
    (papplyEval V W).rel ((funSpace V W).upSet (step X₀ Y₀)) (V.upSet X₀) (W.upSet Y₀)
    := by
  refine ⟨(funSpace V W).PDmem_upSet (step_mem hX₀ hY₀), V.PDmem_upSet hX₀,
    W.PDmem_upSet hY₀, ?_⟩
  intro G hG X hX
  obtain ⟨hGmem, hGsub⟩ := hG
  obtain ⟨hXmem, hXsub⟩ := hX
  refine ⟨Y₀, ⟨hY₀, subset_rfl⟩, hGmem, hXmem, hY₀, ?_⟩
  intro f hf
  have hfstep : f.rel X₀ Y₀ := mem_step.mp (hGsub hf)
  exact f.mono hfstep hXsub subset_rfl hXmem hY₀

theorem re_forallG_forallX_existsY {R : ℕ → ℕ → ℕ → Prop}
    (hR : REPred (fun s => R s.unpair.1 s.unpair.2.unpair.1 s.unpair.2.unpair.2)) :
    REPred (fun w => ∀ g ∈ decodeList w.unpair.1, ∀ x ∈ decodeList w.unpair.2.unpair
    .1,
      ∃ y ∈ decodeList w.unpair.2.unpair.2, R g x y) := by

  have hm1 : Nat.Primrec (fun s : ℕ => Nat.pair s.unpair.1.unpair.1
      (Nat.pair s.unpair.1.unpair.2 s.unpair.2)) :=
    (Nat.Primrec.left.comp Nat.Primrec.left).pair
      ((Nat.Primrec.right.comp Nat.Primrec.left).pair Nat.Primrec.right)
  have hR2 : REPred₂ (fun gx y => R gx.unpair.1 gx.unpair.2 y) := by
    show REPred (fun t => R t.unpair.1.unpair.1 t.unpair.1.unpair.2 t.unpair.2)
    refine REPred.of_iff (fun s => ?_) (hR.comp hm1)
    simp only [unpair_pair_fst, unpair_pair_snd]

  have hE : REPred (fun u => ∃ b ∈ decodeList u.unpair.1,
      R u.unpair.2.unpair.1 u.unpair.2.unpair.2 b) := bExists_decodeList_re hR2

  have hm2 : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.1.unpair.1
      (Nat.pair t.unpair.1.unpair.2 t.unpair.2)) := hm1
  have hF : REPred₂ (fun param x => ∃ y ∈ decodeList param.unpair.1,
      R param.unpair.2 x y) := by
    show REPred (fun t => ∃ y ∈ decodeList t.unpair.1.unpair.1,
      R t.unpair.1.unpair.2 t.unpair.2 y)
```

```
    refine REPred.of_iff (fun t => ?_) (hE.comp hm2)
    simp only [unpair_pair_fst, unpair_pair_snd]
  have hFfull : REPred (fun t => ∀ x ∈ decodeList t.unpair.2,
      ∃ y ∈ decodeList t.unpair.1.unpair.1, R t.unpair.1.unpair.2 x y) :=
    REPred.forall_mem_decodeList₂ hF

  have hm3 : Nat.Primrec (fun t : ℕ => Nat.pair
      (Nat.pair t.unpair.1.unpair.1 t.unpair.2) t.unpair.1.unpair.2) :=
    ((Nat.Primrec.left.comp Nat.Primrec.left).pair Nat.Primrec.right).pair
      (Nat.Primrec.right.comp Nat.Primrec.left)
  have hG : REPred₂ (fun param g => ∀ x ∈ decodeList param.unpair.2,
      ∃ y ∈ decodeList param.unpair.1, R g x y) := by
    show REPred (fun t => ∀ x ∈ decodeList t.unpair.1.unpair.2,
      ∃ y ∈ decodeList t.unpair.1.unpair.1, R t.unpair.2 x y)
    refine REPred.of_iff (fun t => ?_) (hFfull.comp hm3)
    simp only [unpair_pair_fst, unpair_pair_snd]
  have hGfull : REPred (fun t => ∀ g ∈ decodeList t.unpair.2,
      ∀ x ∈ decodeList t.unpair.1.unpair.2,
        ∃ y ∈ decodeList t.unpair.1.unpair.1, R g x y) :=
    REPred.forall_mem_decodeList₂ hG

  have hm4 : Nat.Primrec (fun w : ℕ => Nat.pair
      (Nat.pair w.unpair.2.unpair.2 w.unpair.2.unpair.1) w.unpair.1) :=
    ((Nat.Primrec.right.comp Nat.Primrec.right).pair
      (Nat.Primrec.left.comp Nat.Primrec.right)).pair Nat.Primrec.left
  refine REPred.of_iff (fun w => ?_) (hGfull.comp hm4)
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem papplyEval_isComputable {V : NeighborhoodSystem α} {W : NeighborhoodSystem β}
    (Pf : ComputablePresentation (funSpace V W)) (P : ComputablePresentation V)
    (Q : ComputablePresentation W)
    (heval : REPred (fun s => (eval V W).rel (Pf.X s.unpair.1)
      (P.X s.unpair.2.unpair.1) (Q.X s.unpair.2.unpair.2))) :
    REPred (fun w => (papplyEval V W).rel ((funSpace V W).Ypd Pf w.unpair.1)
      (V.Ypd P w.unpair.2.unpair.1) (W.Ypd Q w.unpair.2.unpair.2)) := by
  refine REPred.of_iff (fun w => ?_)
    (re_forallG_forallX_existsY
      (R := fun g x y => (eval V W).rel (Pf.X g) (P.X x) (Q.X y)) heval)
  exact papplyEval_rel_Ypd_iff Pf P Q

end

section
set_option linter.unusedVariables false

theorem example_721.{u_1, u_2} : And
  (And
    (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
   NeighborhoodSystem α}
      {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
      (Pf :
        @DomainTheory.NeighbourhoodSystems.ComputablePresentation
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
          (@DomainTheory.NeighbourhoodSystems.funSpace α β V W))
      (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
      (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W),
```

```
   (Domain.Recursive.REPred fun (s : Nat) =>
       @DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W) α β
         (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) V W (@DomainTheory.
NeighbourhoodSystems.eval α β V W)
         (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
           (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) Pf (@Prod.fst Nat
Nat (Nat.unpair s)))
         (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P
           (@Prod.fst Nat Nat (Nat.unpair (@Prod.snd Nat Nat (Nat.unpair s)))))
         (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W Q
           (@Prod.snd Nat Nat (Nat.unpair (@Prod.snd Nat Nat (Nat.unpair s)))))) →
     Domain.Recursive.REPred fun (w : Nat) =>
       @DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel
         (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)) (Set α)
 (Set β)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
           (@DomainTheory.NeighbourhoodSystems.funSpace α β V W))
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
         (@DomainTheory.NeighbourhoodSystems.papplyEval α β V W)
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
           (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) Pf (@Prod.fst Nat
Nat (Nat.unpair w)))
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P
           (@Prod.fst Nat Nat (Nat.unpair (@Prod.snd Nat Nat (Nat.unpair w)))))
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd β W Q
           (@Prod.snd Nat Nat (Nat.unpair (@Prod.snd Nat Nat (Nat.unpair w))))))
 (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
   {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
   (Pf :
     @DomainTheory.NeighbourhoodSystems.ComputablePresentation
       (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
       (@DomainTheory.NeighbourhoodSystems.funSpace α β V W))
   (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
   (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W) {?c Ac Bc :
Nat},
   Iff
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel
       (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)) (Set α) (
Set β)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
         (@DomainTheory.NeighbourhoodSystems.funSpace α β V W))
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
       (@DomainTheory.NeighbourhoodSystems.papplyEval α β V W)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
         (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) Pf ?c)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P Ac)
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd β W Q Bc))
```

```
      (∀ (g : Nat),
        @Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.Recursive.
  decodeList ?c) g →
          ∀ (x : Nat),
            @Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.
  Recursive.decodeList Ac) x →
              ∃ (y : Nat),
                And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (
  Domain.Recursive.decodeList Bc) y)
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel
                      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W) α β
                      (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) V W
                      (@DomainTheory.NeighbourhoodSystems.eval α β V W)
                      (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
                        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
                        (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) Pf g)
                      (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
   P x)
                      (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W
   Q y)))))
(∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
  {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β} {X₀ : Set α} {Y₀ : Set
   β},
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X₀ →
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β W Y₀ →
      @DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel
        (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)) (Set α) (
  Set β)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
          (@DomainTheory.NeighbourhoodSystems.funSpace α β V W))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
        (@DomainTheory.NeighbourhoodSystems.papplyEval α β V W)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
          (@DomainTheory.NeighbourhoodSystems.funSpace α β V W)
          (@DomainTheory.NeighbourhoodSystems.step α β V W X₀ Y₀))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V X₀)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet β W Y₀)) :=
@And.intro
(And
  (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem α}
    {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (Pf :
      @DomainTheory.NeighbourhoodSystems.ComputablePresentation
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
        (@DomainTheory.NeighbourhoodSystems.funSpace α β V W))
    (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
    (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W),
    (Domain.Recursive.REPred fun (s : Nat) =>
        @DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W) α β
```

```
        (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) V W (@DomainTheory.
NeighbourhoodSystems.eval α β V W)
        (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
          (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) Pf (@Prod.fst Nat
Nat (Nat.unpair s)))
        (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P
          (@Prod.fst Nat Nat (Nat.unpair (@Prod.snd Nat Nat (Nat.unpair s)))))
        (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W Q
          (@Prod.snd Nat Nat (Nat.unpair (@Prod.snd Nat Nat (Nat.unpair s))))))) →
    Domain.Recursive.REPred fun (w : Nat) =>
      @DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel
        (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)) (Set α)
 (Set β)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
          (@DomainTheory.NeighbourhoodSystems.funSpace α β V W))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
        (@DomainTheory.NeighbourhoodSystems.papplyEval α β V W)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
          (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) Pf (@Prod.fst Nat
Nat (Nat.unpair w)))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P
          (@Prod.fst Nat Nat (Nat.unpair (@Prod.snd Nat Nat (Nat.unpair w)))))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd β W Q
          (@Prod.snd Nat Nat (Nat.unpair (@Prod.snd Nat Nat (Nat.unpair w))))))
 (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
  {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (Pf :
    @DomainTheory.NeighbourhoodSystems.ComputablePresentation
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
      (@DomainTheory.NeighbourhoodSystems.funSpace α β V W))
  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
  (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W) {?c Ac Bc :
Nat},
  Iff
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel
      (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)) (Set α) (
Set β)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
        (@DomainTheory.NeighbourhoodSystems.funSpace α β V W))
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
      (@DomainTheory.NeighbourhoodSystems.papplyEval α β V W)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
        (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) Pf ?c)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P Ac)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd β W Q Bc))
    (∀ (g : Nat),
      @Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.Recursive.
decodeList ?c) g →
```

```
         ∀ (x : Nat),
           @Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.
 Recursive.decodeList Ac) x →
             ∃ (y : Nat),
               And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (
 Domain.Recursive.decodeList Bc) y)
                 (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel
                   (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W) α β
                   (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) V W
                   (@DomainTheory.NeighbourhoodSystems.eval α β V W)
                   (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
                     (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
                     (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) Pf g)
                   (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
  P x)
                   (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W
  Q y)))))
(∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
  {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β} {X₀ : Set α} {Y₀ : Set
  β},
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α V X₀ →
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem β W Y₀ →
      @DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel
        (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)) (Set α) (
 Set β)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
          (@DomainTheory.NeighbourhoodSystems.funSpace α β V W))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
        (@DomainTheory.NeighbourhoodSystems.papplyEval α β V W)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
          (@DomainTheory.NeighbourhoodSystems.funSpace α β V W)
          (@DomainTheory.NeighbourhoodSystems.step α β V W X₀ Y₀))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet α V X₀)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.upSet β W Y₀))
(@And.intro
  (∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
 NeighborhoodSystem α}
    {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
    (Pf :
      @DomainTheory.NeighbourhoodSystems.ComputablePresentation
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
        (@DomainTheory.NeighbourhoodSystems.funSpace α β V W))
    (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
    (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W),
    (Domain.Recursive.REPred fun (s : Nat) =>
        @DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W) α β
          (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) V W (@DomainTheory.
 NeighbourhoodSystems.eval α β V W)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
```

```
          (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) Pf (@Prod.fst Nat
Nat (Nat.unpair s)))
         (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V P
           (@Prod.fst Nat Nat (Nat.unpair (@Prod.snd Nat Nat (Nat.unpair s)))))
         (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W Q
           (@Prod.snd Nat Nat (Nat.unpair (@Prod.snd Nat Nat (Nat.unpair s)))))) →
    Domain.Recursive.REPred fun (w : Nat) =>
      @DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel
        (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)) (Set α)
 (Set β)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
          (@DomainTheory.NeighbourhoodSystems.funSpace α β V W))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
        (@DomainTheory.NeighbourhoodSystems.papplyEval α β V W)
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
          (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) Pf (@Prod.fst Nat
Nat (Nat.unpair w)))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P
          (@Prod.fst Nat Nat (Nat.unpair (@Prod.snd Nat Nat (Nat.unpair w)))))
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd β W Q
          (@Prod.snd Nat Nat (Nat.unpair (@Prod.snd Nat Nat (Nat.unpair w))))))
(∀ {α : Type u_1} {β : Type u_2} {V : DomainTheory.NeighbourhoodSystems.
NeighborhoodSystem α}
  {W : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem β}
  (Pf :
    @DomainTheory.NeighbourhoodSystems.ComputablePresentation
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
      (@DomainTheory.NeighbourhoodSystems.funSpace α β V W))
  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α V)
  (Q : @DomainTheory.NeighbourhoodSystems.ComputablePresentation β W) {?c Ac Bc :
Nat},
  Iff
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel
      (Set (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)) (Set α) (
Set β)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain


        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
        (@DomainTheory.NeighbourhoodSystems.funSpace α β V W))
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain α V)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.PowerDomain β W)
      (@DomainTheory.NeighbourhoodSystems.papplyEval α β V W)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
        (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) Pf ?c)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd α V P Ac)
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Ypd β W Q Bc))
    (∀ (g : Nat),
      @Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.Recursive.
decodeList ?c) g →
        ∀ (x : Nat),
          @Membership.mem Nat (List Nat) (@List.instMembership Nat) (Domain.
Recursive.decodeList Ac) x →
```

```
              ∃ (y : Nat),
                And (@Membership.mem Nat (List Nat) (@List.instMembership Nat) (
    Domain.Recursive.decodeList Bc) y)
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap₂.rel
                    (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W) α β
                    (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) V W
                    (@DomainTheory.NeighbourhoodSystems.eval α β V W)
                    (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X
                      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α β V W)
                      (@DomainTheory.NeighbourhoodSystems.funSpace α β V W) Pf g)
                    (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α V
     P x)
                    (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X β W
     Q y))))
    @DomainTheory.NeighbourhoodSystems.papplyEval_isComputable
    @DomainTheory.NeighbourhoodSystems.papplyEval_rel_Ypd_iff)
  @DomainTheory.NeighbourhoodSystems.papplyEval_step_witness
end

section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}

namespace Proposition77

variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)

def consB (r : ℕ) : ℕ := r.unpair.2.unpair.1

def eqB (r : ℕ) : ℕ := r.unpair.1

def intI (r : ℕ) : ℕ := r.unpair.2.unpair.2

end Proposition77
end

section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}

namespace Proposition77

theorem le_pair_left (a b : ℕ) : a ≤ Nat.pair a b := by
  unfold Nat.pair; split <;> omega

end Proposition77
end

section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}

namespace Proposition77

variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)
```

```
def listGetStp (t : ℕ) : ℕ :=
  Nat.pair (t.unpair.2.unpair.1.unpair.1 - 1)
    (selectFn (isOne t.unpair.2.unpair.1.unpair.1) t.unpair.1 t.unpair.2.unpair.1.
    unpair.2)

def listGet (c i : ℕ) : ℕ :=
  (foldCode listGetStp 0 (Nat.pair (i + 1) 0) c).unpair.2

theorem listGetStp_pair (cd val x : ℕ) :
    listGetStp (Nat.pair x (Nat.pair (Nat.pair cd val) 0))
      = Nat.pair (cd - 1) (selectFn (isOne cd) x val) := by
  unfold listGetStp
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem listGet_foldl_zero (l : List ℕ) (val : ℕ) :
    (List.foldl (fun acc x => listGetStp (Nat.pair x (Nat.pair acc 0))) (Nat.pair 0
    val) l).unpair.2
      = val := by
  induction l generalizing val with
  | nil => simp
  | cons x xs ih =>
      rw [List.foldl_cons, listGetStp_pair, Nat.zero_sub,
        show isOne 0 = 0 from rfl, selectFn_zero, ih]

theorem listGet_foldl (l : List ℕ) (c val : ℕ) :
    (List.foldl (fun acc x => listGetStp (Nat.pair x (Nat.pair acc 0)))
        (Nat.pair (c + 1) val) l).unpair.2 = l.getD c val := by
  induction l generalizing c val with
  | nil => simp
  | cons x xs ih =>
      rw [List.foldl_cons, listGetStp_pair, Nat.add_sub_cancel]
      rcases Nat.eq_zero_or_pos c with rfl | hc
      · rw [show isOne (0 + 1) = 1 from rfl, selectFn_one, listGet_foldl_zero,
          List.getD_cons_zero]
      · obtain ⟨c', rfl⟩ : ∃ c', c = c' + 1 := ⟨c - 1, by omega⟩
        rw [show isOne (c' + 1 + 1) = 0 by unfold isOne; omega, selectFn_zero, ih,
          List.getD_cons_succ]

theorem listGet_encodeList (l : List ℕ) (i : ℕ) : listGet (encodeList l) i = l.getD i
    0 := by
  unfold listGet
  rw [foldCode_eq]
  exact listGet_foldl l i 0

end Proposition77
end

section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}

namespace Proposition77

theorem max_sq_le_pair (i j : ℕ) : max i j * max i j ≤ Nat.pair i j := by
  unfold Nat.pair
  rcases lt_or_ge i j with h | h
```

```
  · rw [ite_eq_left h, show max i j = j by omega]; omega
  · rw [ite_eq_right (by omega), show max i j = i by omega]; omega

end Proposition77
end

section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}

namespace Proposition77

variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)

theorem memS_sub_embPair (hD : ∀ X, D.mem X → X.Nonempty)
    {W A B : Set (List Bool × α)} (hW : MemS D W) (hsub : W ⊆ embPair A B) :
    ∃ Pp Qq, MemS D Pp ∧ MemS D Qq ∧ W = embPair Pp Qq := by
  cases hW with
  | gamma =>
      obtain ⟨a, ha⟩ := hD D.master D.master_mem
      rcases hsub (show (([], a) : List Bool × α) ∈ Gamma D from ha) with ⟨p', hp', -⟩
    | ⟨q', hq', -⟩
      · simp at hp'
      · simp at hq'
  | @zero Z hZ =>
      obtain ⟨a, ha⟩ := hD Z hZ
      rcases hsub (show (([], a) : List Bool × α) ∈ embZero Z from ⟨rfl, ha⟩) with
        ⟨p', hp', -⟩ | ⟨q', hq', -⟩
      · simp at hp'
      · simp at hq'
  | @pair Pp Qq hP hQ => exact ⟨Pp, Qq, hP, hQ, rfl⟩

theorem memS_sub_embZero (hD : ∀ X, D.mem X → X.Nonempty) {W : Set (List Bool × α)} {
    Y : Set α}
    (hW : MemS D W) (hsub : W ⊆ embZero Y) : ∃ Z, D.mem Z ∧ W = embZero Z := by
  cases hW with
  | gamma =>
      obtain ⟨a, ha⟩ := hD D.master D.master_mem
      exact absurd (hsub (show ((true :: [], a) : List Bool × α) ∈ Gamma D from ha)).1
    (by simp)
  | @zero Z hZ => exact ⟨Z, hZ, rfl⟩
  | @pair Pp Qq hP hQ =>
      obtain ⟨⟨pth, a⟩, ht⟩ := embPair_nonempty (memS_nonempty hD hP) (Q := Qq)
      have hmem := hsub ht
      rcases ht with ⟨p', hp', -⟩ | ⟨q', hq', -⟩
      · exact absurd (hp'.symm.trans hmem.1) (by simp)
      · exact absurd (hq'.symm.trans hmem.1) (by simp)

end Proposition77
end

section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}

namespace Proposition77
```

```
theorem nat_shape (n : ℕ) : n = 0 ∨ (∃ a, n = 2 * a + 1) ∨ (∃ a, n = 2 * a + 2) := by
  rcases Nat.eq_zero_or_pos n with rfl | hn
  · exact Or.inl rfl
  · rcases Nat.lt_or_ge (n % 2) 1 with h | h
    · exact Or.inr (Or.inr ⟨n / 2 - 1, by omega⟩)
    · exact Or.inr (Or.inl ⟨n / 2, by omega⟩)

end Proposition77
end

section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}

namespace Proposition77

variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)

def packT (e c ii : ℕ) : ℕ := Nat.pair e (Nat.pair c ii)

@[simp] theorem eqB_packT (e c ii : ℕ) : eqB (packT e c ii) = e := by
  simp only [eqB, packT, unpair_pair_fst]

@[simp] theorem consB_packT (e c ii : ℕ) : consB (packT e c ii) = c := by
  simp only [consB, packT, unpair_pair_fst, unpair_pair_snd]

@[simp] theorem intI_packT (e c ii : ℕ) : intI (packT e c ii) = ii := by
  simp only [intI, packT, unpair_pair_snd]

end Proposition77
end

section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}

namespace Proposition77

variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)

variable (fcons feq finter : ℕ → ℕ)

def dsharpStep (p : ℕ) : ℕ :=
  let i := p.unpair.1.unpair.1
  let j := p.unpair.1.unpair.2
  let tbl := p.unpair.2
  let w := p.unpair.1
  let na := i / 2 - 1
  let nb := j / 2 - 1
  let r1 := listGet tbl (w - 1 - Nat.pair na.unpair.1 nb.unpair.1)
  let r2 := listGet tbl (w - 1 - Nat.pair na.unpair.2 nb.unpair.2)
  selectFn (1 - i) (packT (1 - j) 1 j)
    (selectFn (1 - j) (packT (1 - i) 1 i)
      (selectFn (i % 2)
        (selectFn (j % 2)
```

```
          (packT (feq (Nat.pair (i / 2) (j / 2))) (fcons (Nat.pair (i / 2) (j / 2)))
            (2 * finter (Nat.pair (i / 2) (j / 2)) + 1))
          (packT 0 0 0))
        (selectFn (j % 2) (packT 0 0 0)
          (packT (eqB r1 * eqB r2) (consB r1 * consB r2)
            (2 * Nat.pair (intI r1) (intI r2) + 2)))))

theorem dsharpStep_i0 (j tbl : ℕ) :
    dsharpStep fcons feq finter (Nat.pair (Nat.pair 0 j) tbl) = packT (1 - j) 1 j :=
    by
  simp only [dsharpStep, unpair_pair_fst, unpair_pair_snd, Nat.sub_zero, selectFn_one]

theorem dsharpStep_j0 {i : ℕ} (tbl : ℕ) (hi : i = 0) :
    dsharpStep fcons feq finter (Nat.pair (Nat.pair i 0) tbl) = packT (1 - i) 1 i :=
    by
  simp only [dsharpStep, unpair_pair_fst, unpair_pair_snd]
  rw [show (1 : ℕ) - i = 0 by omega, selectFn_zero, Nat.sub_zero, selectFn_one]

theorem dsharpStep_ll (a b tbl : ℕ) :
    dsharpStep fcons feq finter (Nat.pair (Nat.pair (2 * a + 1) (2 * b + 1)) tbl)
      = packT (feq (Nat.pair a b)) (fcons (Nat.pair a b)) (2 * finter (Nat.pair a b) +
     1) := by
  simp only [dsharpStep, unpair_pair_fst, unpair_pair_snd]
  rw [show (1 : ℕ) - (2 * a + 1) = 0 by omega, selectFn_zero,
    show (1 : ℕ) - (2 * b + 1) = 0 by omega, selectFn_zero,
    show (2 * a + 1) % 2 = 1 by omega, selectFn_one,
    show (2 * b + 1) % 2 = 1 by omega, selectFn_one,
    show (2 * a + 1) / 2 = a by omega, show (2 * b + 1) / 2 = b by omega]

theorem dsharpStep_ln (a b tbl : ℕ) :
    dsharpStep fcons feq finter (Nat.pair (Nat.pair (2 * a + 1) (2 * b + 2)) tbl) =
    packT 0 0 0 := by
  simp only [dsharpStep, unpair_pair_fst, unpair_pair_snd]
  rw [show (1 : ℕ) - (2 * a + 1) = 0 by omega, selectFn_zero,
    show (1 : ℕ) - (2 * b + 2) = 0 by omega, selectFn_zero,
    show (2 * a + 1) % 2 = 1 by omega, selectFn_one,
    show (2 * b + 2) % 2 = 0 by omega, selectFn_zero]

theorem dsharpStep_nl (a b tbl : ℕ) :
    dsharpStep fcons feq finter (Nat.pair (Nat.pair (2 * a + 2) (2 * b + 1)) tbl) =
    packT 0 0 0 := by
  simp only [dsharpStep, unpair_pair_fst, unpair_pair_snd]
  rw [show (1 : ℕ) - (2 * a + 2) = 0 by omega, selectFn_zero,
    show (1 : ℕ) - (2 * b + 1) = 0 by omega, selectFn_zero,
    show (2 * a + 2) % 2 = 0 by omega, selectFn_zero,
    show (2 * b + 1) % 2 = 1 by omega, selectFn_one]

theorem dsharpStep_nn (a b tbl : ℕ) :
    dsharpStep fcons feq finter (Nat.pair (Nat.pair (2 * a + 2) (2 * b + 2)) tbl)
      = packT
          (eqB (listGet tbl (Nat.pair (2 * a + 2) (2 * b + 2) - 1 - Nat.pair a.unpair
    .1 b.unpair.1))
            * eqB (listGet tbl (Nat.pair (2 * a + 2) (2 * b + 2) - 1 - Nat.pair a.
    unpair.2 b.unpair.2)))
          (consB (listGet tbl (Nat.pair (2 * a + 2) (2 * b + 2) - 1 - Nat.pair a.
    unpair.1 b.unpair.1))
```

```
          * consB (listGet tbl (Nat.pair (2 * a + 2) (2 * b + 2) - 1 - Nat.pair a.
    unpair.2 b.unpair.2)))
        (2 * Nat.pair
          (intI (listGet tbl (Nat.pair (2 * a + 2) (2 * b + 2) - 1 - Nat.pair a.
    unpair.1 b.unpair.1)))
          (intI (listGet tbl (Nat.pair (2 * a + 2) (2 * b + 2) - 1 - Nat.pair a.
    unpair.2 b.unpair.2)))
          + 2) := by
  simp only [dsharpStep, unpair_pair_fst, unpair_pair_snd]
  rw [show (1 : ℕ) - (2 * a + 2) = 0 by omega, selectFn_zero,
    show (1 : ℕ) - (2 * b + 2) = 0 by omega, selectFn_zero,
    show (2 * a + 2) % 2 = 0 by omega, selectFn_zero,
    show (2 * b + 2) % 2 = 0 by omega, selectFn_zero,
    show (2 * a + 2) / 2 - 1 = a by omega, show (2 * b + 2) / 2 - 1 = b by omega]

end Proposition77
end

section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}

namespace Proposition77

theorem pair_lt_succ_sq (x y : ℕ) : Nat.pair x y < (max x y + 1) * (max x y + 1) := by
  have hm : ∀ z : ℕ, (z + 1) * (z + 1) = z * z + 2 * z + 1 := fun z => by
    rw [Nat.succ_mul, Nat.mul_succ]; omega
  unfold Nat.pair
  rcases lt_or_ge x y with h | h
  · rw [ite_eq_left h, show max x y = y by omega, hm]; omega
  · rw [ite_eq_right (by omega), show max x y = x by omega, hm]; omega

theorem pair_lt_pair_of_lt {x y i j : ℕ} (hx : x < i) (hy : y < j) :
    Nat.pair x y < Nat.pair i j := by
  have h1 : Nat.pair x y < (max x y + 1) * (max x y + 1) := pair_lt_succ_sq x y
  have h2 : max i j * max i j ≤ Nat.pair i j := max_sq_le_pair i j
  have h3 : max x y + 1 ≤ max i j := by
    rcases le_total x y with h | h
    · rw [max_eq_right h]; have := le_max_right i j; omega
    · rw [max_eq_left h]; have := le_max_left i j; omega
  have h4 : (max x y + 1) * (max x y + 1) ≤ max i j * max i j := Nat.mul_le_mul h3 h3
  omega

end Proposition77
end

section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}

namespace Proposition77

variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)

theorem primrec_listGet : Nat.Primrec (fun p => listGet p.unpair.1 p.unpair.2) := by
  have hstp : Nat.Primrec listGetStp := by
```

```
    unfold listGetStp
    have hcd : Nat.Primrec (fun t => t.unpair.2.unpair.1.unpair.1) :=
      Nat.Primrec.left.comp (Nat.Primrec.left.comp Nat.Primrec.right)
    have hval : Nat.Primrec (fun t => t.unpair.2.unpair.1.unpair.2) :=
      Nat.Primrec.right.comp (Nat.Primrec.left.comp Nat.Primrec.right)
    have hx : Nat.Primrec (fun t : ℕ => t.unpair.1) := Nat.Primrec.left
    exact (primrec_sub₂ hcd (Nat.Primrec.const 1)).pair
      (primrec_selectFn (primrec_isOne.comp hcd) hx hval)
  have hz : Nat.Primrec (fun p : ℕ => Nat.pair (p.unpair.2 + 1) 0) :=
    (Nat.Primrec.succ.comp Nat.Primrec.right).pair (Nat.Primrec.const 0)
  exact (Nat.Primrec.right.comp
    (primrec_foldCode hstp (Nat.Primrec.const 0) hz Nat.Primrec.left)).of_eq fun p =>
    rfl

theorem primrec_listGet₂ {c i : ℕ → ℕ} (hc : Nat.Primrec c) (hi : Nat.Primrec i) :
    Nat.Primrec (fun p => listGet (c p) (i p)) :=
  (primrec_listGet.comp (hc.pair hi)).of_eq fun p => by
    simp only [unpair_pair_fst, unpair_pair_snd]

end Proposition77
end

section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}

namespace Proposition77

variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)

variable (fcons feq finter : ℕ → ℕ)

theorem primrec_dsharpStep (hfcons : Nat.Primrec fcons) (hfeq : Nat.Primrec feq)
    (hfinter : Nat.Primrec finter) : Nat.Primrec (dsharpStep fcons feq finter) := by
  have hi : Nat.Primrec (fun p : ℕ => p.unpair.1.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.left
  have hj : Nat.Primrec (fun p : ℕ => p.unpair.1.unpair.2) := Nat.Primrec.right.comp
    Nat.Primrec.left
  have htbl : Nat.Primrec (fun p : ℕ => p.unpair.2) := Nat.Primrec.right
  have hw : Nat.Primrec (fun p : ℕ => p.unpair.1) := Nat.Primrec.left
  have hidiv : Nat.Primrec (fun p : ℕ => p.unpair.1.unpair.1 / 2) := primrec_div2.comp
    hi
  have hjdiv : Nat.Primrec (fun p : ℕ => p.unpair.1.unpair.2 / 2) := primrec_div2.comp
    hj
  have hna : Nat.Primrec (fun p : ℕ => p.unpair.1.unpair.1 / 2 - 1) :=
    primrec_sub₂ hidiv (Nat.Primrec.const 1)
  have hnb : Nat.Primrec (fun p : ℕ => p.unpair.1.unpair.2 / 2 - 1) :=
    primrec_sub₂ hjdiv (Nat.Primrec.const 1)
  have hv1 : Nat.Primrec (fun p : ℕ =>
      Nat.pair (p.unpair.1.unpair.1 / 2 - 1).unpair.1 (p.unpair.1.unpair.2 / 2 - 1).
    unpair.1) :=
    (Nat.Primrec.left.comp hna).pair (Nat.Primrec.left.comp hnb)
  have hv2 : Nat.Primrec (fun p : ℕ =>
      Nat.pair (p.unpair.1.unpair.1 / 2 - 1).unpair.2 (p.unpair.1.unpair.2 / 2 - 1).
    unpair.2) :=
    (Nat.Primrec.right.comp hna).pair (Nat.Primrec.right.comp hnb)
```

```
have hr1 : Nat.Primrec (fun p : ℕ => listGet p.unpair.2
    (p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair.1 / 2 - 1).unpair.1
      (p.unpair.1.unpair.2 / 2 - 1).unpair.1)) :=
  primrec_listGet₂ htbl (primrec_sub₂ (primrec_sub₂ hw (Nat.Primrec.const 1)) hv1)
have hr2 : Nat.Primrec (fun p : ℕ => listGet p.unpair.2
    (p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair.1 / 2 - 1).unpair.2
      (p.unpair.1.unpair.2 / 2 - 1).unpair.2)) :=
  primrec_listGet₂ htbl (primrec_sub₂ (primrec_sub₂ hw (Nat.Primrec.const 1)) hv2)
have hidiv2 : Nat.Primrec (fun p : ℕ => Nat.pair (p.unpair.1.unpair.1 / 2) (p.unpair
  .1.unpair.2 / 2)) :=
  hidiv.pair hjdiv
have hpackT : ∀ {e c ii : ℕ → ℕ}, Nat.Primrec e → Nat.Primrec c → Nat.Primrec ii
  →
    Nat.Primrec (fun p => packT (e p) (c p) (ii p)) := by
  intro e c ii he hc hii
  exact (he.pair (hc.pair hii)).of_eq fun p => rfl
have hleaf : Nat.Primrec (fun p : ℕ =>
    packT (feq (Nat.pair (p.unpair.1.unpair.1 / 2) (p.unpair.1.unpair.2 / 2)))
      (fcons (Nat.pair (p.unpair.1.unpair.1 / 2) (p.unpair.1.unpair.2 / 2)))
      (2 * finter (Nat.pair (p.unpair.1.unpair.1 / 2) (p.unpair.1.unpair.2 / 2)) +
  1)) :=
  hpackT (hfeq.comp hidiv2) (hfcons.comp hidiv2)
    (Nat.Primrec.succ.comp (primrec_mul₂ (Nat.Primrec.const 2) (hfinter.comp hidiv2))
  )
have hzero : Nat.Primrec (fun _ : ℕ => packT 0 0 0) := Nat.Primrec.const _

have heqB1 : Nat.Primrec (fun p => eqB _) := Nat.Primrec.left.comp hr1
have heqB2 : Nat.Primrec (fun p => eqB _) := Nat.Primrec.left.comp hr2
have hconsB1 : Nat.Primrec (fun p => consB _) := (Nat.Primrec.left.comp Nat.Primrec.
  right).comp hr1
have hconsB2 : Nat.Primrec (fun p => consB _) := (Nat.Primrec.left.comp Nat.Primrec.
  right).comp hr2
have hintI1 : Nat.Primrec (fun p => intI _) := (Nat.Primrec.right.comp Nat.Primrec.
  right).comp hr1
have hintI2 : Nat.Primrec (fun p => intI _) := (Nat.Primrec.right.comp Nat.Primrec.
  right).comp hr2
have hnode : Nat.Primrec (fun p : ℕ =>
    packT (eqB (listGet p.unpair.2 (p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair.1 /
   2 - 1).unpair.1
              (p.unpair.1.unpair.2 / 2 - 1).unpair.1))
          * eqB (listGet p.unpair.2 (p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair.1
  / 2 - 1).unpair.2
              (p.unpair.1.unpair.2 / 2 - 1).unpair.2)))
      (consB (listGet p.unpair.2 (p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair.1 / 2
   - 1).unpair.1
              (p.unpair.1.unpair.2 / 2 - 1).unpair.1))
          * consB (listGet p.unpair.2 (p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair
  .1 / 2 - 1).unpair.2
              (p.unpair.1.unpair.2 / 2 - 1).unpair.2)))
      (2 * Nat.pair (intI (listGet p.unpair.2 (p.unpair.1 - 1 - Nat.pair (p.unpair
  .1.unpair.1 / 2 - 1).unpair.1
              (p.unpair.1.unpair.2 / 2 - 1).unpair.1)))
            (intI (listGet p.unpair.2 (p.unpair.1 - 1 - Nat.pair (p.unpair.1.unpair
  .1 / 2 - 1).unpair.2
              (p.unpair.1.unpair.2 / 2 - 1).unpair.2))) + 2)) :=
  hpackT (primrec_mul₂ heqB1 heqB2) (primrec_mul₂ hconsB1 hconsB2)
```

```
      ((Nat.Primrec.succ.comp Nat.Primrec.succ).comp (primrec_mul₂ (Nat.Primrec.const
    2)
        (hintI1.pair hintI2)))
  refine (primrec_selectFn (primrec_sub₂ (Nat.Primrec.const 1) hi)
    (hpackT (primrec_sub₂ (Nat.Primrec.const 1) hj) (Nat.Primrec.const 1) hj)
    (primrec_selectFn (primrec_sub₂ (Nat.Primrec.const 1) hj)
      (hpackT (primrec_sub₂ (Nat.Primrec.const 1) hi) (Nat.Primrec.const 1) hi)
      (primrec_selectFn (primrec_mod2.comp hi)
        (primrec_selectFn (primrec_mod2.comp hj) hleaf hzero)
        (primrec_selectFn (primrec_mod2.comp hj) hzero hnode)))).of_eq fun p => rfl

end Proposition77
end

section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}

namespace Proposition77

variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)

def rtbl (step : ℕ → ℕ) : ℕ → ℕ
  | 0 => 0
  | (w + 1) => Nat.pair (step (Nat.pair w (rtbl step w))) (rtbl step w) + 1

def gOf (step : ℕ → ℕ) (w : ℕ) : ℕ := step (Nat.pair w (rtbl step w))

def gList (step : ℕ → ℕ) : ℕ → List ℕ
  | 0 => []
  | (w + 1) => gOf step w :: gList step w

theorem gOf_def (step : ℕ → ℕ) (w : ℕ) : gOf step w = step (Nat.pair w (rtbl step w))
    := rfl

theorem getD_gList (step : ℕ → ℕ) : ∀ (w p : ℕ), p < w →
    (gList step w).getD p 0 = gOf step (w - 1 - p) := by
  intro w
  induction w with
  | zero => intro p hp; omega
  | succ w ih =>
      intro p hp
      cases p with
      | zero =>
          rw [gList, List.getD_cons_zero]
          have : w + 1 - 1 - 0 = w := by omega
          rw [this]
      | succ p =>
          rw [gList, List.getD_cons_succ, ih p (by omega)]
          have : w + 1 - 1 - (p + 1) = w - 1 - p := by omega
          rw [this]

theorem rtbl_eq_encode (step : ℕ → ℕ) (w : ℕ) : rtbl step w = encodeList (gList step
    w) := by
  induction w with
  | zero => rfl
```

```
  | succ w ih =>
      show Nat.pair (step (Nat.pair w (rtbl step w))) (rtbl step w) + 1
        = encodeList (gList step (w + 1))
      rw [gList, encodeList, gOf, ih]

theorem listGet_rtbl (step : ℕ → ℕ) {v w : ℕ} (hv : v < w) :
    listGet (rtbl step w) (w - 1 - v) = gOf step v := by
  rw [rtbl_eq_encode, listGet_encodeList, getD_gList step w (w - 1 - v) (by omega)]
  congr 1; omega

theorem rtbl_eq_rec (step : ℕ → ℕ) (w : ℕ) :
    rtbl step w
      = Nat.rec (motive := fun _ => ℕ) 0
          (fun y IH => Nat.pair (step (Nat.pair y IH)) IH + 1) w := by
  induction w with
  | zero => rfl
  | succ w ih => rw [rtbl, ih]

theorem primrec_rtbl {step : ℕ → ℕ} (hstep : Nat.Primrec step) : Nat.Primrec (rtbl
    step) := by
  have hg : Nat.Primrec (fun c => Nat.pair (step c.unpair.2) c.unpair.2.unpair.2 + 1)
    :=
    Nat.Primrec.succ.comp ((hstep.comp Nat.Primrec.right).pair
      (Nat.Primrec.right.comp Nat.Primrec.right))
  refine ((Nat.Primrec.prec Nat.Primrec.zero hg).comp
    (Nat.Primrec.zero.pair primrec_id)).of_eq fun w => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]
  rw [rtbl_eq_rec]

theorem primrec_gOf {step : ℕ → ℕ} (hstep : Nat.Primrec step) : Nat.Primrec (gOf step
    ) :=
  (hstep.comp (primrec_id.pair (primrec_rtbl hstep))).of_eq fun _ => rfl

end Proposition77
end

section
open NeighborhoodSystem Domain.Recursive Example61
variable {α : Type*}

namespace Proposition77

theorem unpair_fst_le (n : ℕ) : n.unpair.1 ≤ n := by
  have h := le_pair_left n.unpair.1 n.unpair.2
  rwa [pair_unpair] at h

end Proposition77
end
end DomainTheory.NeighbourhoodSystems
end
```

EXERCISE 7.21. Is there a non-trivial combinator of type

$$\mathbb{P}(D \to E) \to (\mathbb{P}D \to \mathbb{P}E)\,?$$

Are there in general any isomorphisms between the systems

$$(D \to \mathbb{P}E),\ \mathbb{P}(D \times E),\ \mathbb{P}D \times \mathbb{P}E\ ??$$

Is there a non-trivial combinator of type

$$\mathbb{P}(D \times E) \times \mathbb{P}(E \times F) \to \mathbb{P}(D \times F)\ ???$$

Is there any connection between

$$\mathbb{P}\mathbf{N} \text{ and } P\mathbf{N}\ ????$$

3.8.24 Exercise 7.22 — domain of formal languages

(For algebraists.) Let $\Sigma = \{0, 1\}^*$ be the free semigroup. A new domain is constructed by defining a family of sets by the least fixed point theorem as follows:

$$S = \{\Sigma\} \cup \{\{\sigma\} \mid \sigma \in \Sigma\} \cup \{XY \mid X, Y \in S\} \cup \{X \cap Y \mid X, Y \in S \text{ and } X \cap Y \neq \emptyset\}.$$

Here we write: $XY = \{\sigma\tau \mid \sigma \in X \text{ and } \tau \in Y\}$.

Prove that S is an effectively given, positive neighbourhood system. (Hint: The sets in S are each "regular events" in the terminology of automata theory, and we have a decision method for the set algebra of regular events.)

Define multiplication on $|S|$ by

$$xy = \{Z \in S \mid \exists X \in x\ \exists Y \in y.\ XY \subseteq Z\},$$

and show $|S|$ becomes a semigroup with Σ embedded into $|S|$ by the homomorphism $\sigma \mapsto \{X \in S \mid \sigma \in X\}$.

Investigate some *infinite words* in S, say those defined by least fixed points such as: $\vec{\sigma} = \sigma\,\vec{\sigma}$ and $\vec{\sigma} = \vec{\sigma}\,\sigma$. Are these equations true:

$$\vec{\sigma}\,\vec{\sigma} = \vec{\sigma}, \quad \vec{\sigma}\,\vec{\sigma}\,\vec{\sigma} = \vec{\sigma}, \quad \vec{\sigma}\,\vec{1}\,\vec{\sigma}\,\vec{1} = \vec{\sigma}\,\vec{1},$$

and $\vec{01}\,\vec{01}\,\vec{01}\,\vec{01} = \vec{01}\,\vec{01}$?

Exercise_7_22.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2
public import Mathlib.Computability.EpsilonNFA
public import Mathlib.Data.Fintype.Option

public import Mathlib.Logic.Equiv.List
public import Mathlib.Data.Fintype.Prod

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
```

```
namespace Exercise722
open NeighborhoodSystem ApproximableMap

section

def concat (X Y : Set (List Bool)) : Set (List Bool) := {w | ∃ a ∈ X, ∃ b ∈ Y, a ++ b
    = w}
end

section

inductive InS : Set (List Bool) → Prop
  | univ : InS Set.univ
  | singleton (σ : List Bool) : InS {σ}
  | mul {X Y : Set (List Bool)} : InS X → InS Y → InS (concat X Y)
  | inter {X Y : Set (List Bool)} : InS X → InS Y → (X ∩ Y).Nonempty → InS (X ∩ Y)
end

section
@[simp] theorem mem_concat {X Y : Set (List Bool)} {w : List Bool} :
    w ∈ concat X Y ↔ ∃ a ∈ X, ∃ b ∈ Y, a ++ b = w := Iff.rfl
end

section

theorem Ssys_master_mem : InS Set.univ := InS.univ
end

section

theorem Ssys_master_nonempty : (Set.univ : Set (List Bool)).Nonempty := by
  exact ⟨[], Set.mem_univ []⟩
end

section

theorem Ssys_sub_master {X : Set (List Bool)} (_h : InS X) : X ⊆ Set.univ :=
  Set.subset_univ _
end

section

theorem concat_mono {X X' Y Y' : Set (List Bool)} (hX : X ⊆ X') (hY : Y ⊆ Y') :
    concat X Y ⊆ concat X' Y' := by
  rintro w ⟨a, ha, b, hb, rfl⟩; exact ⟨a, hX ha, b, hY hb, rfl⟩
end

section

theorem concat_nonempty {X Y : Set (List Bool)} (hX : X.Nonempty) (hY : Y.Nonempty) :
    (concat X Y).Nonempty := by
  obtain ⟨a, ha⟩ := hX
  obtain ⟨b, hb⟩ := hY
  exact ⟨a ++ b, a, ha, b, hb, rfl⟩
end
```

```
section

theorem InS.nonempty {X : Set (List Bool)} (h : InS X) : X.Nonempty := by
  induction h with
  | univ => exact ⟨[], trivial⟩
  | singleton σ => exact ⟨σ, rfl⟩
  | mul _ _ ihX ihY => exact concat_nonempty ihX ihY
  | inter _ _ hne _ _ => exact hne
end

section

theorem Ssys_inter_mem {X Y Z : Set (List Bool)}
    (hX : InS X) (hY : InS Y) (hZ : InS Z) (hZsub : Z ⊆ X ∩ Y) : InS (X ∩ Y) :=
  InS.inter hX hY (hZ.nonempty.mono hZsub)
end

end Exercise722
end DomainTheory.NeighbourhoodSystems

section
namespace DomainTheory.NeighbourhoodSystems
namespace Exercise722
open NeighborhoodSystem ApproximableMap
section

def Ssys : NeighborhoodSystem (List Bool) where
  mem := InS
  master := Set.univ
  master_nonempty := Ssys_master_nonempty
  master_mem := Ssys_master_mem
  inter_mem := Ssys_inter_mem
  sub_master := Ssys_sub_master
end

section
@[simp] theorem Ssys_mem {X : Set (List Bool)} : Ssys.mem X ↔ InS X := Iff.rfl
end

section

def mulElem (x y : Ssys.Element) : Ssys.Element where
  mem Z := InS Z ∧ ∃ X, x.mem X ∧ ∃ Y, y.mem Y ∧ concat X Y ⊆ Z
  sub h := h.1
  master_mem :=
    ⟨InS.univ, Set.univ, x.master_mem, Set.univ, y.master_mem, Set.subset_univ _⟩
  inter_mem := by
    rintro Z1 Z2 ⟨hZ1, X1, hX1, Y1, hY1, hsub1⟩ ⟨hZ2, X2, hX2, Y2, hY2, hsub2⟩
    have hXi : x.mem (X1 ∩ X2) := x.inter_mem hX1 hX2
    have hYi : y.mem (Y1 ∩ Y2) := y.inter_mem hY1 hY2
    have hcsub : concat (X1 ∩ X2) (Y1 ∩ Y2) ⊆ Z1 ∩ Z2 := by
      intro w hw
      exact ⟨hsub1 (concat_mono Set.inter_subset_left Set.inter_subset_left hw),
             hsub2 (concat_mono Set.inter_subset_right Set.inter_subset_right hw)⟩
    have hne : (Z1 ∩ Z2).Nonempty :=
      (concat_nonempty (x.sub hXi).nonempty (y.sub hYi).nonempty).mono hcsub
```

```
    exact ⟨InS.inter hZ1 hZ2 hne, X1 ∩ X2, hXi, Y1 ∩ Y2, hYi, hcsub⟩
  up_mem := by
    rintro Z W ⟨_, X, hX, Y, hY, hsub⟩ hW hZW
    exact ⟨hW, X, hX, Y, hY, hsub.trans hZW⟩
end

section
@[simp] theorem mem_mulElem {x y : Ssys.Element} {Z : Set (List Bool)} :
    (mulElem x y).mem Z ↔ InS Z ∧ ∃ X, x.mem X ∧ ∃ Y, y.mem Y ∧ concat X Y ⊆ Z := Iff
    .rfl
end

section

def emb (σ : List Bool) : Ssys.Element where
  mem X := InS X ∧ σ ∈ X
  sub h := h.1
  master_mem := ⟨InS.univ, Set.mem_univ σ⟩
  inter_mem := by
    rintro X Y ⟨hX, hσX⟩ ⟨hY, hσY⟩
    exact ⟨InS.inter hX hY ⟨σ, hσX, hσY⟩, hσX, hσY⟩
  up_mem := by
    rintro X Y ⟨_, hσ⟩ hY hsub
    exact ⟨hY, hsub hσ⟩
end

section
@[simp] theorem mem_emb {σ : List Bool} {X : Set (List Bool)} :
    (emb σ).mem X ↔ InS X ∧ σ ∈ X := Iff.rfl
end

section

def prependMap (σ : List Bool) : ApproximableMap Ssys Ssys where
  rel Y Z := InS Y ∧ InS Z ∧ concat {σ} Y ⊆ Z
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨InS.univ, InS.univ, Set.subset_univ _⟩
  inter_right := by
    rintro Y Z Z' ⟨hY, hZ, hsub⟩ ⟨_, hZ', hsub'⟩
    have hcsub : concat {σ} Y ⊆ Z ∩ Z' := Set.subset_inter hsub hsub'
    have hne : (Z ∩ Z').Nonempty :=
      (concat_nonempty (Set.singleton_nonempty σ) hY.nonempty).mono hcsub
    exact ⟨hY, InS.inter hZ hZ' hne, hcsub⟩
  mono := by
    rintro Y Y' Z Z' ⟨_, hZ, hsub⟩ hYY' hZZ' hY' hZ'
    exact ⟨hY', hZ', (concat_mono (Set.Subset.refl _) hYY').trans (hsub.trans hZZ')⟩
end

section

def repeatWord (w : List Bool) : ℕ → List Bool
  | 0 => []
  | n + 1 => w ++ repeatWord w n
end
```

```
section
@[simp] theorem repeatWord_zero (w : List Bool) : repeatWord w 0 = [] := rfl
end

section

def powerLang (w : List Bool) : Set (List Bool) :=
  {u | ∃ n, repeatWord w n = u}
end

section
@[simp] theorem mem_powerLang {w u : List Bool} :
    u ∈ powerLang w ↔ ∃ n, repeatWord w n = u := Iff.rfl
end

section

def streamArrow (σ : List Bool) : Ssys.Element := (prependMap σ).fixElement
end

section

def streamElemMem (w : List Bool) (Z : Set (List Bool)) : Prop :=
  InS Z ∧ ∀ n, repeatWord w n ∈ Z
end

section

def streamElem (w : List Bool) : Ssys.Element where
  mem Z := streamElemMem w Z
  sub h := h.1
  master_mem := ⟨InS.univ, fun n => Set.mem_univ (repeatWord w n)⟩
  inter_mem := by
    intro X Y hX hY
    obtain ⟨hXIn, hXw⟩ := hX
    obtain ⟨hYIn, hYw⟩ := hY
    exact ⟨InS.inter hXIn hYIn ⟨repeatWord w 0, hXw 0, hYw 0⟩, fun n => ⟨hXw n, hYw n⟩⟩
  up_mem := by
    intro X Y hX hInSY hsub
    obtain ⟨_hXIn, hXw⟩ := hX
    exact ⟨hInSY, fun n => hsub (hXw n)⟩
end

section

theorem append_mem_concat {X Y : Set (List Bool)} {a b : List Bool} (ha : a ∈ X) (hb :
     b ∈ Y) :
    a ++ b ∈ concat X Y := ⟨a, ha, b, hb, rfl⟩

theorem concat_assoc (X Y Z : Set (List Bool)) :
    concat (concat X Y) Z = concat X (concat Y Z) := by
  ext w
  constructor
  · rintro ⟨ab, ⟨a, ha, b, hb, rfl⟩, c, hc, rfl⟩
    exact ⟨a, ha, b ++ c, ⟨b, hb, c, hc, rfl⟩, by rw [List.append_assoc]⟩
  · rintro ⟨a, ha, bc, ⟨b, hb, c, hc, rfl⟩, rfl⟩
```

```
    exact ⟨a ++ b, ⟨a, ha, b, hb, rfl⟩, c, hc, by rw [List.append_assoc]⟩

theorem mulElem_assoc (x y z : Ssys.Element) :
    mulElem (mulElem x y) z = mulElem x (mulElem y z) := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro ⟨hW, P, ⟨_, X, hX, Y, hY, hXY⟩, Z, hZ, hPZ⟩
    refine ⟨hW, X, hX, concat Y Z, ⟨InS.mul (y.sub hY) (z.sub hZ), Y, hY, Z, hZ,
      Set.Subset.refl _⟩, ?_⟩
    rw [← concat_assoc]
    exact (concat_mono hXY (Set.Subset.refl _)).trans hPZ
  · rintro ⟨hW, X, hX, Q, ⟨_, Y, hY, Z, hZ, hYZ⟩, hXQ⟩
    refine ⟨hW, concat X Y, ⟨InS.mul (x.sub hX) (y.sub hY), X, hX, Y, hY,
      Set.Subset.refl _⟩, Z, hZ, ?_⟩
    rw [concat_assoc]
    exact (concat_mono (Set.Subset.refl _) hYZ).trans hXQ

theorem repeatWord_add (w : List Bool) (a b : ℕ) :
    repeatWord w (a + b) = repeatWord w a ++ repeatWord w b := by
  induction a with
  | zero => simp [repeatWord]
  | succ a ih =>
      simp only [Nat.succ_add, repeatWord]
      rw [ih, List.append_assoc]

theorem repeatWord_eq_empty (w : List Bool) (n : ℕ) (hw : w = []) :
    repeatWord w n = [] := by
  subst hw
  induction n with
  | zero => rfl
  | succ n ih => simp [repeatWord, ih]

theorem InS_powerLang_empty : InS (powerLang []) := by
  have h : powerLang [] = {[]} := by
    ext u
    simp only [mem_powerLang, Set.mem_singleton_iff]
    constructor
    · rintro ⟨n, hn⟩; exact hn.symm.trans (repeatWord_eq_empty [] n rfl)
    · intro hu; subst hu; exact ⟨0, rfl⟩
  simpa [h] using InS.singleton []

@[simp] theorem mem_streamElem {w : List Bool} {Z : Set (List Bool)} :
    (streamElem w).mem Z ↔ streamElemMem w Z := Iff.rfl

theorem streamElem_powers_of_mul (w : List Bool) (Z : Set (List Bool))
    (h : (mulElem (streamElem w) (streamElem w)).mem Z) :
    streamElemMem w Z := by
  obtain ⟨hZ, X, hX, Y, hY, hsub⟩ := h
  obtain ⟨_hXIn, hXw⟩ := hX
  obtain ⟨_hYIn, hYw⟩ := hY
  refine ⟨hZ, fun n => ?_⟩
  have h1 := hsub (append_mem_concat (hXw n) (hYw 0))
  simpa [repeatWord_zero, List.append_nil] using h1

theorem streamElem_mul_self_mem (w : List Bool) (Z : Set (List Bool))
```

```
    (h : streamElemMem w Z) (hPL : InS (powerLang w)) :
    (mulElem (streamElem w) (streamElem w)).mem Z := by
  refine ⟨h.1, powerLang w, ⟨hPL, fun n => ⟨n, rfl⟩⟩, powerLang w, ⟨hPL, fun n => ⟨n, rfl
    ⟩⟩, ?_⟩
  intro u hu
  obtain ⟨a, ⟨m, hm⟩, b, ⟨n, hn⟩, rfl⟩ := hu
  simpa [hm, hn, repeatWord_add] using h.2 (m + n)

theorem streamElem_idempotent (w : List Bool) (hPL : InS (powerLang w)) :
    mulElem (streamElem w) (streamElem w) = streamElem w := by
  apply NeighborhoodSystem.Element.ext
  intro Z
  exact ⟨streamElem_powers_of_mul w Z, fun h => streamElem_mul_self_mem w Z h hPL⟩

example : mulElem (streamElem []) (streamElem []) = streamElem [] :=
  streamElem_idempotent [] InS_powerLang_empty

example (σ : List Bool) (Z : Set (List Bool)) :
    (mulElem (streamElem σ) (streamElem σ)).mem Z → streamElemMem σ Z :=
  streamElem_powers_of_mul σ Z

example (σ : List Bool) (h : InS (powerLang σ)) :
    mulElem (mulElem (streamElem σ) (streamElem σ)) (streamElem σ) = streamElem σ :=
    by
  rw [mulElem_assoc, streamElem_idempotent σ h, streamElem_idempotent σ h]

example (σ : List Bool) (h : InS (powerLang (σ ++ [true]))) :
    mulElem (streamElem (σ ++ [true])) (streamElem (σ ++ [true])) =
      streamElem (σ ++ [true]) :=
  streamElem_idempotent (σ ++ [true]) h

example (h : InS (powerLang [false, true])) :
    mulElem
        (mulElem (streamElem [false, true]) (streamElem [false, true]))
        (mulElem (streamElem [false, true]) (streamElem [false, true])) =
      mulElem (streamElem [false, true]) (streamElem [false, true]) := by
  rw [streamElem_idempotent _ h, streamElem_idempotent _ h]
end

section

theorem Ssys_isPositive : Ssys.IsPositive := by
  intro X Y hX hY
  exact ⟨fun h => h.nonempty, fun h => InS.inter hX hY h⟩
end

section
theorem Ssys_master : Ssys.master = Set.univ := rfl
end

section

theorem concat_singleton (a b : List Bool) : concat {a} {b} = {a ++ b} := by
  ext w
  simp only [mem_concat, Set.mem_singleton_iff]
  constructor
```

```
  · rintro ⟨a', rfl, b', rfl, rfl⟩; rfl
  · rintro rfl; exact ⟨a, rfl, b, rfl, rfl⟩
end

section

theorem emb_injective : Function.Injective emb := by
  intro σ τ h
  have hmem : (emb τ).mem {σ} := h ▸ (⟨InS.singleton σ, rfl⟩ : (emb σ).mem {σ})
  exact (Set.mem_singleton_iff.mp hmem.2).symm
end

section

theorem emb_mul (σ τ : List Bool) : emb (σ ++ τ) = mulElem (emb σ) (emb τ) := by
  apply NeighborhoodSystem.Element.ext
  intro Z
  constructor
  · rintro ⟨hZ, hστ⟩
    refine ⟨hZ, {σ}, ⟨InS.singleton σ, rfl⟩, {τ}, ⟨InS.singleton τ, rfl⟩, ?_⟩
    rw [concat_singleton]
    intro w hw
    rw [Set.mem_singleton_iff] at hw
    subst hw; exact hστ
  · rintro ⟨hZ, X, ⟨_, hσX⟩, Y, ⟨_, hτY⟩, hsub⟩
    exact ⟨hZ, hsub (append_mem_concat hσX hτY)⟩
end

section

theorem mulElem_bot_le (y : Ssys.Element) : mulElem Ssys.bot y ≤ y := by
  rintro Z ⟨hInS, X, hX, Y, hY, hsub⟩
  rw [NeighborhoodSystem.mem_bot, Ssys_master] at hX
  subst hX
  refine y.up_mem hY hInS fun w hw => hsub ?_
  simpa using append_mem_concat (Set.mem_univ ([] : List Bool)) hw
end

section

theorem mulElem_mono_right (x : Ssys.Element) : Monotone (mulElem x) := by
  rintro y y' hyy' Z ⟨hInS, X, hX, Y, hY, hsub⟩
  exact ⟨hInS, X, hX, Y, hyy' Y hY, hsub⟩
end

section
theorem powerLang_concat (w : List Bool) :
    concat (powerLang w) (powerLang w) ⊆ powerLang w := by
  rintro u ⟨a, ⟨m, hm⟩, b, ⟨n, hn⟩, rfl⟩
  exact ⟨m + n, by rw [repeatWord_add, hm, hn]⟩
end

section

theorem prependMap_toElementMap (σ : List Bool) (y : Ssys.Element) :
```

```
    (prependMap σ).toElementMap y = mulElem (emb σ) y := by
  apply NeighborhoodSystem.Element.ext
  intro Z
  constructor
  · rintro ⟨Y, hY, hInSY, hInSZ, hsub⟩
    exact ⟨hInSZ, {σ}, ⟨InS.singleton σ, rfl⟩, Y, hY, hsub⟩
  · rintro ⟨hInSZ, X, ⟨_, hσX⟩, Y, hY, hsub⟩
    refine ⟨Y, hY, y.sub hY, hInSZ, ?_⟩
    exact (concat_mono (Set.singleton_subset_iff.mpr hσX) (Set.Subset.refl _)).trans
    hsub
end

section
theorem repeatWord_succ (w : List Bool) (n : ℕ) :
    repeatWord w (n + 1) = w ++ repeatWord w n := rfl
end

section

theorem streamArrow_eq (σ : List Bool) :
    mulElem (emb σ) (streamArrow σ) = streamArrow σ := by
  rw [← prependMap_toElementMap]
  exact toElementMap_fixElement (prependMap σ)
end

section

theorem prependMap_iterElem_mul_streamArrow_le (σ : List Bool) :
    ∀ n, mulElem ((prependMap σ).iterElem n) (streamArrow σ) ≤ streamArrow σ
  | 0 => by
      have h0 : (prependMap σ).iterElem 0 = Ssys.bot := by
        show (idMap Ssys).toElementMap Ssys.bot = Ssys.bot
        exact toElementMap_idMap Ssys.bot
      rw [h0]
      exact mulElem_bot_le (streamArrow σ)
  | n + 1 => by
      have hsucc : (prependMap σ).iterElem (n + 1) =
          mulElem (emb σ) ((prependMap σ).iterElem n) := by
        show ((prependMap σ).comp ((prependMap σ).iterMap n)).toElementMap Ssys.bot =
   _
        rw [toElementMap_comp]
        exact prependMap_toElementMap σ _
      rw [hsucc, mulElem_assoc]
      calc mulElem (emb σ) (mulElem ((prependMap σ).iterElem n) (streamArrow σ))
          ≤ mulElem (emb σ) (streamArrow σ) :=
            mulElem_mono_right (emb σ) (prependMap_iterElem_mul_streamArrow_le σ n)
        _ = streamArrow σ := streamArrow_eq σ
end

section

theorem streamArrow_le_mul_self (σ : List Bool) :
    streamArrow σ ≤ mulElem (streamArrow σ) (streamArrow σ) := by
  apply fixElement_le_of_toElementMap_le
  have heq : (prependMap σ).toElementMap (mulElem (streamArrow σ) (streamArrow σ)) =
      mulElem (streamArrow σ) (streamArrow σ) := by
```

```
    rw [prependMap_toElementMap, ← mulElem_assoc, streamArrow_eq]
  exact le_of_eq heq
end

section

theorem streamArrow_mul_self_le (σ : List Bool) :
    mulElem (streamArrow σ) (streamArrow σ) ≤ streamArrow σ := by
  rintro Z ⟨hInSZ, X, hX, Y, hY, hsub⟩
  obtain ⟨n, hn⟩ := (mem_fixElement (prependMap σ)).mp hX
  have hXn : ((prependMap σ).iterElem n).mem X := (mem_iterElem (prependMap σ) n).mpr
    hn
  exact prependMap_iterElem_mul_streamArrow_le σ n Z ⟨hInSZ, X, hXn, Y, hY, hsub⟩
end

section

theorem streamArrow_mul_self (σ : List Bool) :
    mulElem (streamArrow σ) (streamArrow σ) = streamArrow σ :=
  le_antisymm (streamArrow_mul_self_le σ) (streamArrow_le_mul_self σ)
end

end Exercise722
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise722
section
set_option linter.unusedVariables false

theorem example_722 : And
  (And
    (∀ (σ τ : List Bool),
      @Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (List Bool)
          DomainTheory.NeighbourhoodSystems.Exercise722.Ssys)
        (DomainTheory.NeighbourhoodSystems.Exercise722.emb
          (@HAppend.hAppend (List Bool) (List Bool) (List Bool)
            (@instHAppendOfAppend (List Bool) (@List.instAppend Bool)) σ τ))
        (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem (DomainTheory.
   NeighbourhoodSystems.Exercise722.emb σ)
          (DomainTheory.NeighbourhoodSystems.Exercise722.emb τ)))
    (∀
      (x y z :
        @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (List Bool)
          DomainTheory.NeighbourhoodSystems.Exercise722.Ssys),
      @Eq
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (List Bool)
          DomainTheory.NeighbourhoodSystems.Exercise722.Ssys)
        (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem
          (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem x y) z)
        (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem x
          (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem y z))))
  (∀ (σ : List Bool),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (List Bool)
        DomainTheory.NeighbourhoodSystems.Exercise722.Ssys)
      (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem
```

```
      (DomainTheory.NeighbourhoodSystems.Exercise722.streamArrow σ)
      (DomainTheory.NeighbourhoodSystems.Exercise722.streamArrow σ))
    (DomainTheory.NeighbourhoodSystems.Exercise722.streamArrow σ)) :=
@And.intro
(And
  (∀ (σ τ : List Bool),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (List Bool)
        DomainTheory.NeighbourhoodSystems.Exercise722.Ssys)
      (DomainTheory.NeighbourhoodSystems.Exercise722.emb
        (@HAppend.hAppend (List Bool) (List Bool) (List Bool)
          (@instHAppendOfAppend (List Bool) (@List.instAppend Bool)) σ τ))
      (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem (DomainTheory.
 NeighbourhoodSystems.Exercise722.emb σ)
        (DomainTheory.NeighbourhoodSystems.Exercise722.emb τ)))
  (∀
    (x y z :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (List Bool)
        DomainTheory.NeighbourhoodSystems.Exercise722.Ssys),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (List Bool)
        DomainTheory.NeighbourhoodSystems.Exercise722.Ssys)
      (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem
        (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem x y) z)
      (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem x
        (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem y z))))
(∀ (σ : List Bool),
  @Eq
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (List Bool)
      DomainTheory.NeighbourhoodSystems.Exercise722.Ssys)
    (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem
      (DomainTheory.NeighbourhoodSystems.Exercise722.streamArrow σ)
      (DomainTheory.NeighbourhoodSystems.Exercise722.streamArrow σ))
    (DomainTheory.NeighbourhoodSystems.Exercise722.streamArrow σ))
(@And.intro
  (∀ (σ τ : List Bool),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (List Bool)
        DomainTheory.NeighbourhoodSystems.Exercise722.Ssys)
      (DomainTheory.NeighbourhoodSystems.Exercise722.emb
        (@HAppend.hAppend (List Bool) (List Bool) (List Bool)
          (@instHAppendOfAppend (List Bool) (@List.instAppend Bool)) σ τ))
      (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem (DomainTheory.
 NeighbourhoodSystems.Exercise722.emb σ)
        (DomainTheory.NeighbourhoodSystems.Exercise722.emb τ)))
  (∀
    (x y z :
      @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (List Bool)
        DomainTheory.NeighbourhoodSystems.Exercise722.Ssys),
    @Eq
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element (List Bool)
        DomainTheory.NeighbourhoodSystems.Exercise722.Ssys)
      (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem
        (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem x y) z)
      (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem x
        (DomainTheory.NeighbourhoodSystems.Exercise722.mulElem y z)))
```

```
    DomainTheory.NeighbourhoodSystems.Exercise722.emb_mul DomainTheory.
    NeighbourhoodSystems.Exercise722.mulElem_assoc)
  DomainTheory.NeighbourhoodSystems.Exercise722.streamArrow_mul_self
end

end DomainTheory.NeighbourhoodSystems.Exercise722
namespace DomainTheory.NeighbourhoodSystems
namespace Exercise722
open NeighborhoodSystem ApproximableMap

section

theorem streamArrow_containsZero_pow_four :
    mulElem
        (mulElem (streamArrow [false, true]) (streamArrow [false, true]))
        (mulElem (streamArrow [false, true]) (streamArrow [false, true]))
      = mulElem (streamArrow [false, true]) (streamArrow [false, true]) := by
  rw [streamArrow_mul_self, streamArrow_mul_self]
end

section

theorem streamArrow_mul_self_append_true (σ : List Bool) :
    mulElem (streamArrow (σ ++ [true])) (streamArrow (σ ++ [true])) =
      streamArrow (σ ++ [true]) :=
  streamArrow_mul_self (σ ++ [true])
end

section

theorem streamArrow_mul_self_self (σ : List Bool) :
    mulElem (mulElem (streamArrow σ) (streamArrow σ)) (streamArrow σ) = streamArrow σ
    := by
  rw [streamArrow_mul_self, streamArrow_mul_self]
end

section

inductive SExpr : Type
  | sigma : SExpr
  | single : List Bool → SExpr
  | cat : SExpr → SExpr → SExpr
  | cap : SExpr → SExpr → SExpr
  deriving DecidableEq
end

section

def sexprOfNatFuel : ℕ → ℕ → Option SExpr
  | 0, _ => none
  | fuel + 1, n =>
    match n.unpair.1 with
    | 0 => some .sigma
    | 1 => (Encodable.decode n.unpair.2).map SExpr.single
    | 2 =>
      match sexprOfNatFuel fuel n.unpair.2.unpair.1, sexprOfNatFuel fuel n.unpair.2.
```

```
    unpair.2 with
      | some a, some b => some (.cat a b)
      | _, _ => none
    | 3 =>
      match sexprOfNatFuel fuel n.unpair.2.unpair.1, sexprOfNatFuel fuel n.unpair.2.
    unpair.2 with
      | some a, some b => some (.cap a b)
      | _, _ => none
    | _ => none
end

section
def sexprOfNat (n : ℕ) : Option SExpr := sexprOfNatFuel (n + 1) n
end

section
def sexprToNat : SExpr → ℕ
  | .sigma => Nat.pair 0 0
  | .single σ => Nat.pair 1 (Encodable.encode σ)
  | .cat a b => Nat.pair 2 (Nat.pair (sexprToNat a) (sexprToNat b))
  | .cap a b => Nat.pair 3 (Nat.pair (sexprToNat a) (sexprToNat b))
end

section
theorem snd_lt_pair_of_pos_fst {a b : ℕ} (ha : 0 < a) : b < Nat.pair a b := by
  rw [Nat.pair]
  split_ifs with h
  · have hb : 0 < b := Nat.lt_trans ha h
    have hbb : b ≤ b * b := by
      calc
        b = 1 * b := (Nat.one_mul b).symm
        _ ≤ b * b := Nat.mul_le_mul_right b (Nat.succ_le_of_lt hb)
    have : b * b < b * b + a := Nat.lt_add_of_pos_right ha
    omega
  · have : 0 < a * a + a := by
      have : a ≤ a * a + a := Nat.le_add_left _ _
      omega
    omega
end

section
theorem sexprOfNatFuel_sexprToNat (e : SExpr) :
    ∀ fuel, sexprToNat e < fuel → sexprOfNatFuel fuel (sexprToNat e) = some e := by
  induction e with
  | sigma =>
    intro fuel hfuel
    cases fuel with
    | zero => omega
    | succ fuel => simp [sexprToNat, sexprOfNatFuel, Nat.unpair_pair]
  | single σ =>
    intro fuel hfuel
    cases fuel with
    | zero => omega
    | succ fuel => simp [sexprToNat, sexprOfNatFuel, Nat.unpair_pair, Encodable.
    encodek]
  | cat a b iha ihb =>
```

```
    intro fuel hfuel
    cases fuel with
    | zero => omega
    | succ fuel =>
      have ha : sexprToNat a < fuel := by
        have hinner : sexprToNat a ≤ Nat.pair (sexprToNat a) (sexprToNat b) := Nat.
    left_le_pair _ _
        have houter : Nat.pair (sexprToNat a) (sexprToNat b) < sexprToNat (.cat a b)
    := by
          simpa [sexprToNat] using snd_lt_pair_of_pos_fst (a := 2) (b := Nat.pair (
    sexprToNat a) (sexprToNat b)) (by omega)
        omega
      have hb : sexprToNat b < fuel := by
        have hinner : sexprToNat b ≤ Nat.pair (sexprToNat a) (sexprToNat b) := Nat.
    right_le_pair _ _
        have houter : Nat.pair (sexprToNat a) (sexprToNat b) < sexprToNat (.cat a b)
    := by
          simpa [sexprToNat] using snd_lt_pair_of_pos_fst (a := 2) (b := Nat.pair (
    sexprToNat a) (sexprToNat b)) (by omega)
        omega
      simp [sexprToNat, sexprOfNatFuel, Nat.unpair_pair, iha _ ha, ihb _ hb]
  | cap a b iha ihb =>
    intro fuel hfuel
    cases fuel with
    | zero => omega
    | succ fuel =>
      have ha : sexprToNat a < fuel := by
        have hinner : sexprToNat a ≤ Nat.pair (sexprToNat a) (sexprToNat b) := Nat.
    left_le_pair _ _
        have houter : Nat.pair (sexprToNat a) (sexprToNat b) < sexprToNat (.cap a b)
    := by
          simpa [sexprToNat] using snd_lt_pair_of_pos_fst (a := 3) (b := Nat.pair (
    sexprToNat a) (sexprToNat b)) (by omega)
        omega
      have hb : sexprToNat b < fuel := by
        have hinner : sexprToNat b ≤ Nat.pair (sexprToNat a) (sexprToNat b) := Nat.
    right_le_pair _ _
        have houter : Nat.pair (sexprToNat a) (sexprToNat b) < sexprToNat (.cap a b)
    := by
          simpa [sexprToNat] using snd_lt_pair_of_pos_fst (a := 3) (b := Nat.pair (
    sexprToNat a) (sexprToNat b)) (by omega)
        omega
      simp [sexprToNat, sexprOfNatFuel, Nat.unpair_pair, iha _ ha, ihb _ hb]
end

section
instance : Encodable SExpr where
  encode := sexprToNat
  decode := sexprOfNat
  encodek e := sexprOfNatFuel_sexprToNat e (sexprToNat e + 1) (Nat.lt_succ_self _)
end

section

def denote : SExpr → Set (List Bool)
  | .sigma => Set.univ
```

```
  | .single σ => {σ}
  | .cat a b => concat (denote a) (denote b)
  | .cap a b => denote a ∩ denote b
end

section
@[simp] theorem denote_sigma : denote .sigma = Set.univ := rfl
end

section
@[simp] theorem denote_single (σ : List Bool) : denote (.single σ) = {σ} := rfl
end

section
@[simp] theorem denote_cat (a b : SExpr) : denote (.cat a b) = concat (denote a) (
    denote b) := rfl
end

section
@[simp] theorem denote_cap (a b : SExpr) : denote (.cap a b) = denote a ∩ denote b :=
    rfl
end

section

def matchesB : SExpr → List Bool → Bool
  | .sigma, _ => true
  | .single σ, w => decide (w = σ)
  | .cat a b, w => (List.range (w.length + 1)).any (fun i => matchesB a (w.take i) &&
    matchesB b (w.drop i))
  | .cap a b, w => matchesB a w && matchesB b w
end

section

theorem mem_concat_iff_split {X Y : Set (List Bool)} {w : List Bool} :
    w ∈ concat X Y ↔ ∃ i, i ≤ w.length ∧ w.take i ∈ X ∧ w.drop i ∈ Y := by
  constructor
  · rintro ⟨a, ha, b, hb, rfl⟩
    refine ⟨a.length, by simp, ?_, ?_⟩
    · rw [List.take_left]; exact ha
    · rw [List.drop_left]; exact hb
  · rintro ⟨i, _, hpre, hsuf⟩
    exact ⟨w.take i, hpre, w.drop i, hsuf, w.take_append_drop i⟩
end

section

theorem matchesB_iff (e : SExpr) (w : List Bool) : matchesB e w = true ↔ w ∈ denote e
    := by
  induction e generalizing w with
  | sigma => simp [matchesB]
  | single σ => simp [matchesB]
  | cat a b iha ihb =>
    rw [denote_cat, mem_concat_iff_split]
    simp only [matchesB, List.any_eq_true, List.mem_range, Bool.and_eq_true]
```

```
    constructor
    · rintro ⟨i, hi, ha, hb⟩
      exact ⟨i, Nat.lt_succ_iff.mp hi, (iha _).mp ha, (ihb _).mp hb⟩
    · rintro ⟨i, hi, ha, hb⟩
      exact ⟨i, Nat.lt_succ_iff.mpr hi, (iha _).mpr ha, (ihb _).mpr hb⟩
  | cap a b iha ihb =>
    simp only [matchesB, Bool.and_eq_true, denote_cap, Set.mem_inter_iff]
    rw [iha, ihb]
end

section

instance decidableMemDenote (e : SExpr) : DecidablePred (· ∈ denote e) :=
  fun w => decidable_of_iff (matchesB e w = true) (matchesB_iff e w)
end

section
instance : Countable SExpr := inferInstance
end

section

def emptyExpr : SExpr := .cap (.single [false]) (.single [true])
end

section
@[simp] theorem denote_emptyExpr : denote emptyExpr = (∅ : Set (List Bool)) := by
  ext w
  simp only [emptyExpr, denote_cap, denote_single, Set.mem_inter_iff, Set.
    mem_singleton_iff,
    Set.mem_empty_iff_false, iff_false, not_and]
  rintro rfl
  decide
end

section



def containsZero : SExpr := .cat .sigma (.cat (.single [false]) .sigma)
end

section

theorem InS_denote_of_nonempty : ∀ {e : SExpr}, (denote e).Nonempty → InS (denote e)
  | .sigma, _ => InS.univ
  | .single σ, _ => InS.singleton σ
  | .cat a b, h => by
    rw [denote_cat] at h ⊢
    obtain ⟨w, x, hx, y, hy, _⟩ := h
    exact InS.mul (InS_denote_of_nonempty ⟨x, hx⟩) (InS_denote_of_nonempty ⟨y, hy⟩)
  | .cap a b, h => by
    rw [denote_cap] at h ⊢
    have ha : (denote a).Nonempty := h.mono Set.inter_subset_left
    have hb : (denote b).Nonempty := h.mono Set.inter_subset_right
    exact InS.inter (InS_denote_of_nonempty ha) (InS_denote_of_nonempty hb) h
end
```

```
section

theorem InS_exists_denote {X : Set (List Bool)} (h : InS X) : ∃ e : SExpr, denote e = X
     := by
  induction h with
  | univ => exact ⟨.sigma, rfl⟩
  | singleton σ => exact ⟨.single σ, rfl⟩
  | mul _ _ iha ihb =>
    obtain ⟨ea, rfl⟩ := iha
    obtain ⟨eb, rfl⟩ := ihb
    exact ⟨.cat ea eb, rfl⟩
  | inter _ _ _ iha ihb =>
    obtain ⟨ea, rfl⟩ := iha
    obtain ⟨eb, rfl⟩ := ihb
    exact ⟨.cap ea eb, rfl⟩
end

section

theorem denote_catSigmaSigma : denote (.cat .sigma .sigma) = denote .sigma := by
  ext w
  simp only [denote_cat, denote_sigma, mem_concat, Set.mem_univ, iff_true]
  exact ⟨[], trivial, w, trivial, rfl⟩
end

section

theorem empty_iff_equiv_emptyExpr (a b : SExpr) :
    denote (.cap a b) = (∅ : Set (List Bool)) ↔ denote (.cap a b) = denote emptyExpr
    := by
  rw [denote_emptyExpr]
end

section
theorem inS_eq_range_denote : {X | InS X} = denote '' {e | (denote e).Nonempty} := by
  ext X
  simp only [Set.mem_ofPred_eq, Set.mem_image]
  constructor
  · intro h
    obtain ⟨e, he⟩ := InS_exists_denote h
    exact ⟨e, by rw [he]; exact h.nonempty, he⟩
  · rintro ⟨e, hne, rfl⟩
    exact InS_denote_of_nonempty hne
end

section

theorem inS_iff_exists_denote {X : Set (List Bool)} :
    InS X ↔ ∃ e : SExpr, denote e = X ∧ X.Nonempty := by
  constructor
  · intro h
    obtain ⟨e, he⟩ := InS_exists_denote h
    exact ⟨e, he, h.nonempty⟩
  · rintro ⟨e, rfl, hne⟩
    exact InS_denote_of_nonempty hne
```

```
end

section

theorem interEq_iff (a b k : SExpr) :
    denote a ∩ denote b = denote k ↔ denote (.cap a b) = denote k := by
  rw [denote_cap]
end

section

theorem mem_denote_sigma (w : List Bool) : w ∈ denote .sigma := Set.mem_univ w
end

section

theorem sigma_ne_containsZero : denote .sigma = denote containsZero := by
  intro h
  have h1 : ([true] : List Bool) ∈ denote .sigma := mem_denote_sigma _
  rw [h] at h1
  exact absurd h1 (by decide)
end

end Exercise722
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise722
section
set_option linter.unusedVariables false

theorem example_722_regular : @Ne (Set (List Bool))
  (DomainTheory.NeighbourhoodSystems.Exercise722.denote DomainTheory.
    NeighbourhoodSystems.Exercise722.SExpr.sigma)
  (DomainTheory.NeighbourhoodSystems.Exercise722.denote DomainTheory.
    NeighbourhoodSystems.Exercise722.containsZero) :=
  DomainTheory.NeighbourhoodSystems.Exercise722.sigma_ne_containsZero
end

end DomainTheory.NeighbourhoodSystems.Exercise722
namespace DomainTheory.NeighbourhoodSystems
namespace Exercise722
open scoped Computability
open Sum Set

section
variable {σ₁ σ₂ : Type}

def catEps (M₁ : NFA Bool σ₁) (M₂ : NFA Bool σ₂) : ?NFA Bool (σ₁ ? σ₂) where
  step s a :=
    match s, a with
    | inl s, some c => inl '' M₁.step s c
    | inl s, none   => {t | s ∈ M₁.accept ∧ t ∈ inr '' M₂.start}
    | inr s, some c => inr '' M₂.step s c
    | inr _, none   => ∅
  start := inl '' M₁.start
  accept := inr '' M₂.accept
end
```

```
section
variable {σ₁ σ₂ : Type}
variable (M₁ : NFA Bool σ₁) (M₂ : NFA Bool σ₂)

@[simp] theorem catEps_step_inl_some (s : σ₁) (c : Bool) :
    (catEps M₁ M₂).step (inl s) (some c) = inl '' M₁.step s c := rfl
@[simp] theorem catEps_step_inl_none (s : σ₁) :
    (catEps M₁ M₂).step (inl s) none = {t | s ∈ M₁.accept ∧ t ∈ inr '' M₂.start} := rfl
@[simp] theorem catEps_step_inr_some (s : σ₂) (c : Bool) :
    (catEps M₁ M₂).step (inr s) (some c) = inr '' M₂.step s c := rfl
@[simp] theorem catEps_step_inr_none (s : σ₂) :
    (catEps M₁ M₂).step (inr s) none = ∅ := rfl
@[simp] theorem catEps_start : (catEps M₁ M₂).start = inl '' M₁.start := rfl
@[simp] theorem catEps_accept : (catEps M₁ M₂).accept = inr '' M₂.accept := rfl

example [Fintype σ₁] [Fintype σ₂] : Fintype (σ₁ ? σ₂) := inferInstance

theorem catEps_mem_?Closure_iff (T : Set (σ₁ ? σ₂)) (s : σ₁ ? σ₂) :
    s ∈ (catEps M₁ M₂).?Closure T ↔
      s ∈ T ∨ ((∃ q ∈ M₁.accept, (inl q : σ₁ ? σ₂) ∈ T) ∧ s ∈ inr '' M₂.start) := by
  constructor
  · intro h
    induction h using ?NFA.?Closure_induction with
    | base x hx => exact Or.inl hx
    | step x y hyx _hclos ih =>

      cases x with
      | inl q =>
        rcases ih with hT | ⟨_, hmem⟩
        · simp only [catEps_step_inl_none, mem_ofPred_eq] at hyx
          exact Or.inr ⟨⟨q, hyx.1, hT⟩, hyx.2⟩
        · obtain ⟨w, _, hw⟩ := hmem; exact absurd hw.symm (by simp)
      | inr q => simp only [catEps_step_inr_none] at hyx; exact absurd hyx (by simp)
  · rintro (hs | ⟨⟨q, hq, hqT⟩, hs⟩)
    · exact (catEps M₁ M₂).subset_?Closure T hs
    · obtain ⟨t, ht, rfl⟩ := hs
      have hbase : (inl q : σ₁ ? σ₂) ∈ (catEps M₁ M₂).?Closure T :=
        (catEps M₁ M₂).subset_?Closure T hqT
      refine (catEps M₁ M₂).mem_?Closure_of_mem_step ?_ hbase
      simp only [catEps_step_inl_none, mem_ofPred_eq]
      exact ⟨hq, t, ht, rfl⟩

theorem catEps_mem_eval_iff (x : List Bool) (s : σ₁ ? σ₂) :
    s ∈ (catEps M₁ M₂).eval x ↔
      (∃ s₁, s = inl s₁ ∧ s₁ ∈ M₁.eval x) ∨
      (∃ t, s = inr t ∧ ∃ u v, x = u ++ v ∧ u ∈ M₁.accepts ∧ t ∈ M₂.eval v) := by
  induction x using List.reverseRecOn generalizing s with
  | nil =>
    show s ∈ (catEps M₁ M₂).?Closure (catEps M₁ M₂).start ↔ _
    rw [catEps_start, catEps_mem_?Closure_iff]
    constructor
    · rintro (hs | ⟨⟨q, hq, hqs⟩, hs⟩)
      · obtain ⟨s₁, hs₁, rfl⟩ := hs
        exact Or.inl ⟨s₁, rfl, hs₁⟩
      · obtain ⟨t, ht, rfl⟩ := hs
```

```
      refine Or.inr ⟨t, rfl, [], [], rfl, ?_, ht⟩
      obtain ⟨q', hq', hqq⟩ := hqs
      cases hqq
      exact ⟨q, hq, hq'⟩
  · rintro (⟨s₁, rfl, hs₁⟩ | ⟨t, rfl, u, v, hx, hu, hv⟩)
    · exact Or.inl ⟨s₁, hs₁, rfl⟩
    · obtain ⟨rfl, rfl⟩ := List.append_eq_nil_iff.mp hx.symm
      obtain ⟨q, hq, hqstart⟩ := hu
      exact Or.inr ⟨⟨q, hq, q, hqstart, rfl⟩, t, hv, rfl⟩
| append_singleton x a ih =>
  rw [?NFA.eval_append_singleton, ?NFA.mem_stepSet_iff]
  constructor
  · rintro ⟨t, ht, hs⟩
    rw [ih] at ht
    rcases ht with ⟨s₁, rfl, hs₁⟩ | ⟨t₂, rfl, u, v, hx, hu, hv⟩
    ·
      rw [catEps_step_inl_some, catEps_mem_?Closure_iff] at hs
      rcases hs with hs | ⟨⟨q, hq, hqmem⟩, hs⟩
      ·
        obtain ⟨s', hs', rfl⟩ := hs
        exact Or.inl ⟨s', rfl, by rw [NFA.eval_append_singleton, NFA.mem_stepSet];
  exact ⟨s₁, hs₁, hs'⟩⟩
      ·
        obtain ⟨q', hq', hqq⟩ := hqmem
        cases hqq
        obtain ⟨t', ht', rfl⟩ := hs
        refine Or.inr ⟨t', rfl, x ++ [a], [], (List.append_nil _).symm, ?_, ht'⟩
        rw [NFA.mem_accepts]
        refine ⟨q, hq, ?_⟩
        change q ∈ M₁.eval (x ++ [a])
        rw [NFA.eval_append_singleton, NFA.mem_stepSet]
        exact ⟨s₁, hs₁, hq'⟩
    ·
      rw [catEps_step_inr_some, catEps_mem_?Closure_iff] at hs
      rcases hs with hs | ⟨⟨q, _, hqmem⟩, _⟩
      · obtain ⟨t', ht', rfl⟩ := hs
        refine Or.inr ⟨t', rfl, u, v ++ [a], by rw [hx, List.append_assoc], hu, ?_⟩
        rw [NFA.eval_append_singleton, NFA.mem_stepSet]; exact ⟨t₂, hv, ht'⟩
      · exact absurd hqmem (by simp)
  · rintro (⟨s', rfl, hs'⟩ | ⟨t', rfl, u, v, hx, hu, hv⟩)
    ·
      rw [NFA.eval_append_singleton, NFA.mem_stepSet] at hs'
      obtain ⟨s₁, hs₁, hstep⟩ := hs'
      exact ⟨inl s₁, (ih (inl s₁)).mpr (Or.inl ⟨s₁, rfl, hs₁⟩),
        by rw [catEps_step_inl_some, catEps_mem_?Closure_iff]; exact Or.inl ⟨s',
  hstep, rfl⟩⟩
    ·
      rcases List.eq_nil_or_concat v with rfl | ⟨v', c, rfl⟩
      ·
        rw [List.append_nil] at hx; subst hx
        rw [NFA.mem_accepts] at hu
        obtain ⟨q, hq, hqe⟩ := hu
        change q ∈ M₁.eval (x ++ [a]) at hqe
        rw [NFA.eval_append_singleton, NFA.mem_stepSet] at hqe
        obtain ⟨s₁, hs₁, hstep⟩ := hqe
        refine ⟨inl s₁, (ih (inl s₁)).mpr (Or.inl ⟨s₁, rfl, hs₁⟩), ?_⟩
```

```
          rw [catEps_step_inl_some, catEps_mem_?Closure_iff]
          exact Or.inr ⟨⟨q, hq, q, hstep, rfl⟩, t', hv, rfl⟩
        ·
          rw [List.concat_eq_append] at hx hv
          rw [← List.append_assoc] at hx
          obtain ⟨hxe, hac⟩ := List.append_inj' hx rfl
          have hca : c = a := by simpa using hac.symm
          subst hca
          rw [NFA.eval_append_singleton, NFA.mem_stepSet] at hv
          obtain ⟨t₂, ht₂, hstep⟩ := hv
          refine ⟨inr t₂, (ih (inr t₂)).mpr (Or.inr ⟨t₂, rfl, u, v', hxe, hu, ht₂⟩), ?_⟩
          rw [catEps_step_inr_some, catEps_mem_?Closure_iff]
          exact Or.inl ⟨t', hstep, rfl⟩

theorem catEps_accepts :
    (catEps M₁ M₂).accepts = concat M₁.accepts M₂.accepts := by
  ext x
  constructor
  · rintro ⟨S, hS, hSeval⟩
    obtain ⟨t, ht, rfl⟩ := hS
    rw [catEps_mem_eval_iff] at hSeval
    rcases hSeval with ⟨s₁, hc, _⟩ | ⟨t', heq, u, v, hx, hu, hv⟩
    · exact absurd hc (by simp)
    · cases heq
      exact ⟨u, hu, v, ⟨t, ht, hv⟩, hx.symm⟩
  · rintro ⟨u, hu, v, hv, rfl⟩
    obtain ⟨t, ht, hteval⟩ := hv
    refine ⟨inr t, ⟨t, ht, rfl⟩, ?_⟩
    rw [catEps_mem_eval_iff]
    exact Or.inr ⟨t, rfl, u, v, rfl, hu, hteval⟩

end

end Exercise722
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise722
section
set_option linter.unusedVariables false

theorem example_722_cat : ∀ {σ₁ σ₂ : Type} (M₁ : NFA Bool σ₁) (M₂ : NFA Bool σ₂),
  @Eq (Language Bool)
    (@?NFA.accepts Bool (Sum σ₁ σ₂) (@DomainTheory.NeighbourhoodSystems.Exercise722.
    catEps σ₁ σ₂ M₁ M₂))
    (DomainTheory.NeighbourhoodSystems.Exercise722.concat (@NFA.accepts Bool σ₁ M₁) (
    @NFA.accepts Bool σ₂ M₂)) :=
  @DomainTheory.NeighbourhoodSystems.Exercise722.catEps_accepts
end

end DomainTheory.NeighbourhoodSystems.Exercise722
namespace DomainTheory.NeighbourhoodSystems
namespace Exercise722
open scoped Computability

section

def sigmaDFA : DFA Bool Unit where
```

```
  step _ _ := ()
  start := ()
  accept := Set.univ
end

section
@[simp] theorem sigmaDFA_accepts : sigmaDFA.accepts = Set.univ :=
  Set.eq_univ_of_forall fun _ => Set.mem_univ _
end

section

abbrev SingleState (σ : List Bool) : Type := Option (Fin (σ.length + 1))
end

section

def singleDFA (σ : List Bool) : DFA Bool (SingleState σ) where
  step s b := s.bind fun i =>
    if h : (i : ℕ) < σ.length then
      if σ.get ⟨i, h⟩ = b then some ⟨i + 1, by omega⟩ else none
    else none
  start := some ⟨0, by omega⟩
  accept := {some ⟨σ.length, by omega⟩}
end

section

theorem complDFA_accepts {σ : Type} (M : DFA Bool σ) (a : SExpr) (h : M.accepts =
    denote a) :
    (M?).accepts = (denote a)? := by
  rw [← h]
  ext w
  exact Iff.rfl

example : Fintype (Unit) := inferInstance
example : DecidableEq (Unit) := inferInstance
example (σ : List Bool) : Fintype (SingleState σ) := by unfold SingleState;
    infer_instance
example (σ : List Bool) : DecidableEq (SingleState σ) := by unfold SingleState;
    infer_instance
example {σ₁ σ₂ : Type} [Fintype σ₁] [Fintype σ₂] : Fintype (σ₁ × σ₂) := inferInstance
example {σ₁ σ₂ : Type} [DecidableEq σ₁] [DecidableEq σ₂] : DecidableEq (σ₁ × σ₂) :=
    inferInstance
end

section

theorem inter_eval {σ₁ σ₂ : Type} (M₁ : DFA Bool σ₁) (M₂ : DFA Bool σ₂) (w : List Bool)
    :
    (M₁.inter M₂).eval w = (M₁.eval w, M₂.eval w) := by
  induction w using List.reverseRecOn with
  | nil => rfl
  | append_singleton w a ih =>
    rw [DFA.eval_append_singleton, DFA.eval_append_singleton, DFA.
    eval_append_singleton, ih]
```

```
    rfl
end

section

theorem interDFA_accepts {σ₁ σ₂ : Type} (M₁ : DFA Bool σ₁) (M₂ : DFA Bool σ₂)
    (a b : SExpr) (h₁ : M₁.accepts = denote a) (h₂ : M₂.accepts = denote b) :
    (M₁.inter M₂).accepts = denote (.cap a b) := by
  rw [denote_cap, ← h₁, ← h₂]
  ext w
  constructor
  · intro hw
    have hp : (M₁.inter M₂).eval w ∈ (M₁.inter M₂).accept := hw
    rw [inter_eval] at hp
    exact hp
  · intro hw
    show (M₁.inter M₂).eval w ∈ (M₁.inter M₂).accept
    rw [inter_eval]
    exact hw
end

end Exercise722
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise722
section
set_option linter.unusedVariables false

theorem example_722_dfa : ∀ {σ₁ σ₂ : Type} (M₁ : DFA Bool σ₁) (M₂ : DFA Bool σ₂) (a b :
    DomainTheory.NeighbourhoodSystems.Exercise722.SExpr),
  @Eq (Language Bool) (@DFA.accepts Bool σ₁ M₁) (DomainTheory.NeighbourhoodSystems.
    Exercise722.denote a) →
    @Eq (Language Bool) (@DFA.accepts Bool σ₂ M₂) (DomainTheory.NeighbourhoodSystems.
    Exercise722.denote b) →
      @Eq (Language Bool) (@DFA.accepts Bool (Prod σ₁ σ₂) (@DFA.inter Bool σ₁ σ₂ M₁ M₂))
        (DomainTheory.NeighbourhoodSystems.Exercise722.denote (a.cap b)) :=
  @DomainTheory.NeighbourhoodSystems.Exercise722.interDFA_accepts
end

end DomainTheory.NeighbourhoodSystems.Exercise722
namespace DomainTheory.NeighbourhoodSystems
namespace Exercise722
open scoped Computability

section
theorem sigmaDFA_accepts_denote : sigmaDFA.accepts = denote .sigma := by
  rw [sigmaDFA_accepts, denote_sigma]
end

section

theorem singleDFA_evalFrom_none (σ : List Bool) (w : List Bool) :
    (singleDFA σ).evalFrom none w = none := by
  induction w with
  | nil => rfl
  | cons b w ih => rw [DFA.evalFrom_cons]; exact ih
end
```

```
section

theorem singleDFA_evalFrom (σ : List Bool) (w : List Bool) (k : Fin (σ.length + 1)) :
    (singleDFA σ).evalFrom (some k) w =
      if h : w <+: List.drop (k : ℕ) σ


      then some ⟨(k : ℕ) + w.length, by
        have hlen := h.length_le
        rw [List.length_drop] at hlen
        have := k.isLt
        omega⟩
      else none := by
  induction w generalizing k with
  | nil =>
    rw [DFA.evalFrom_nil, dite_eq_left List.nil_prefix]
    simp
  | cons b w ih =>
    rw [DFA.evalFrom_cons]
    show (singleDFA σ).evalFrom ((singleDFA σ).step (some k) b) w = _
    by_cases hk : (k : ℕ) < σ.length
    · have hdrop : List.drop (k : ℕ) σ = σ.get ⟨k, hk⟩ :: List.drop ((k : ℕ) + 1) σ :=
    by
        rw [List.get_eq_getElem]; exact List.drop_eq_getElem_cons hk
      have hcondiff : ((b :: w) <+: List.drop (k : ℕ) σ) ↔ (b = σ.get ⟨k, hk⟩ ∧ w <+:
    List.drop ((k : ℕ) + 1) σ) := by
        rw [hdrop, List.cons_prefix_cons]
      by_cases hchar : σ.get ⟨k, hk⟩ = b
      · have hstep : (singleDFA σ).step (some k) b = some ⟨(k : ℕ) + 1, by omega⟩ := by
          simp only [singleDFA, Option.bind_some, dite_eq_left hk, ite_eq_left hchar]
        rw [hstep, ih ⟨(k : ℕ) + 1, by omega⟩]
        by_cases hpre : w <+: List.drop ((k : ℕ) + 1) σ
        · rw [dite_eq_left hpre, dite_eq_left (hcondiff.mpr ⟨hchar.symm, hpre⟩)]
          congr 1
          apply Fin.ext
          simp only [List.length_cons]
          omega
        · rw [dite_eq_right hpre, dite_eq_right (fun hc => hpre (hcondiff.mp hc).2)]
      · have hstep : (singleDFA σ).step (some k) b = none := by
          simp only [singleDFA, Option.bind_some, dite_eq_left hk, ite_eq_right hchar]
        rw [hstep, singleDFA_evalFrom_none, dite_eq_right]
        intro hc
        exact hchar (hcondiff.mp hc).1.symm
    · have hstep : (singleDFA σ).step (some k) b = none := by
        simp only [singleDFA, Option.bind_some, dite_eq_right hk]
      rw [hstep, singleDFA_evalFrom_none, dite_eq_right]
      have hd : List.drop (k : ℕ) σ = [] := by
        rw [List.drop_eq_nil_iff]; have := k.isLt; omega
      rw [hd]; exact (by simp : ¬ (b :: w) <+: [])
end

section

theorem singleDFA_accepts (σ : List Bool) : (singleDFA σ).accepts = {σ} := by
  ext w
  show (singleDFA σ).evalFrom (some ⟨0, by omega⟩) w ∈ (singleDFA σ).accept ↔ _
```

```
  rw [singleDFA_evalFrom]
  by_cases h : w <+: List.drop (0 : ℕ) (σ : List Bool)
  · rw [dite_eq_left h, List.drop_zero] at *
    show some (⟨0 + w.length, _⟩ : Fin (σ.length + 1)) ∈ ({some ⟨σ.length, _⟩} : Set _)
    ↔ w ∈ ({σ} : Set _)
    rw [Set.mem_singleton_iff, Set.mem_singleton_iff, Option.some.injEq, Fin.mk.injEq,
     Nat.zero_add]
    constructor
    · intro hlen; exact h.eq_of_length hlen
    · intro hw; subst hw; rfl
  · rw [dite_eq_right h, List.drop_zero] at *
    show (none : SingleState σ) ∈ ({some ⟨σ.length, _⟩} : Set _) ↔ w ∈ ({σ} : Set _)
    rw [Set.mem_singleton_iff, Set.mem_singleton_iff]
    constructor
    · intro hcontra; exact absurd hcontra (by simp)
    · intro hw; subst hw; exact absurd List.prefix_rfl h
end

section
theorem singleDFA_accepts_denote (σ : List Bool) : (singleDFA σ).accepts = denote (.
    single σ) := by
  rw [singleDFA_accepts]; exact (denote_single σ).symm
end

section

def wordsUpTo : ℕ → List (List Bool)
  | 0 => [[]]
  | n + 1 =>
    (wordsUpTo n) ++ (wordsUpTo n).flatMap fun w => [[false] ++ w, [true] ++ w]
end

section

def anyMatchesB (e : SExpr) (ws : List (List Bool)) : Bool := ws.any (matchesB e)

#eval anyMatchesB .sigma (wordsUpTo 0)
end

section
theorem mem_wordsUpTo (n : ℕ) {w : List Bool} : w ∈ wordsUpTo n ↔ w.length ≤ n := by
  induction n generalizing w with
  | zero =>
    simp only [wordsUpTo, List.mem_singleton]
    constructor
    · rintro (rfl : w = [])
      simp
    · intro h
      exact (List.eq_nil_of_length_eq_zero (Nat.eq_zero_of_le_zero h)).symm ▸ rfl
  | succ n ih =>
    simp only [wordsUpTo]
    rw [List.mem_append, List.mem_flatMap]
    constructor
    · intro h
      rcases h with h | ⟨w', hw', hmem⟩
      · exact Nat.le_succ_of_le (ih.mp h)
```

```
      · rw [List.mem_cons, List.mem_singleton] at hmem
        rcases hmem with rfl | rfl
        · simpa [List.length_cons] using Nat.succ_le_succ (ih.mp hw')
        · simpa [List.length_cons] using Nat.succ_le_succ (ih.mp hw')
    · intro hlen
      by_cases hw : w.length ≤ n
      · exact Or.inl (ih.mpr hw)
      · match w with
        | [] => exfalso; exact hw (by simp)
        | hd :: tl =>
          have htl_len : tl.length ≤ n := by
            have : tl.length + 1 ≤ n + 1 := by simpa [List.length_cons] using hlen
            exact Nat.le_of_succ_le_succ this
          have htl : tl ∈ wordsUpTo n := ih.mpr htl_len
          refine Or.inr ⟨tl, htl, ?_⟩
          rw [List.mem_cons, List.mem_singleton]
          cases hd with
          | false => exact Or.inl rfl
          | true => exact Or.inr rfl
end

end Exercise722
end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Exercise722
section
set_option linter.unusedVariables false

theorem example_722_words : ∀ (n : Nat) {w : List Bool},
  Iff
    (@Membership.mem (List Bool) (List (List Bool)) (@List.instMembership (List Bool))
      (DomainTheory.NeighbourhoodSystems.Exercise722.wordsUpTo n) w)
    (@LE.le Nat instLENat (@List.length Bool w) n) :=
  DomainTheory.NeighbourhoodSystems.Exercise722.mem_wordsUpTo
end

end DomainTheory.NeighbourhoodSystems.Exercise722
namespace DomainTheory.NeighbourhoodSystems
namespace Exercise722
open scoped Computability
open Sum Set

section
variable {σ₁ σ₂ : Type}
variable {σ : Type}
variable {σ : Type} [Fintype σ] {M : NFA Bool σ}

def pathStateAtAux {s t : σ} {x : List Bool} : M.Path s t x → ∀ n, n ≤ x.length → σ
  | .nil s, 0, _ => s
  | .nil _, n + 1, hn => (Nat.not_succ_le_zero n hn).elim
  | .cons _ s' _ _ _ _ p', 0, _ => s'
  | .cons _ _ _ _ _ _ p', n + 1, hn =>
      pathStateAtAux p' n (Nat.le_of_succ_le_succ hn)

def pathStateAt {s t : σ} {x : List Bool} (p : M.Path s t x) (n : ℕ) (hn : n ≤ x.
    length) : σ :=
  pathStateAtAux p n hn
```

```
structure PathSplit {s t : σ} {x : List Bool} (p : M.Path s t x) (n : ℕ) (hn : n ≤ x.
    length) where
  u : σ
  hp : M.Path s u (x.take n)
  ht : M.Path u t (x.drop n)
  hu : pathStateAt p n hn = u

end

section
variable {σ₁ σ₂ : Type}

section NFAinterLemmas

def NFAinter (M₁ : NFA Bool σ₁) (M₂ : NFA Bool σ₂) : NFA Bool (σ₁ × σ₂) where
  step s a := {t | t.1 ∈ M₁.step s.1 a ∧ t.2 ∈ M₂.step s.2 a}
  start := {s | s.1 ∈ M₁.start ∧ s.2 ∈ M₂.start}
  accept := {s | s.1 ∈ M₁.accept ∧ s.2 ∈ M₂.accept}

end NFAinterLemmas

section NFAinterLemmas

variable (M₁ : NFA Bool σ₁) (M₂ : NFA Bool σ₂)

theorem NFAinter_mem_eval_iff (x : List Bool) (p : σ₁ × σ₂) :
    p ∈ (NFAinter M₁ M₂).eval x ↔ p.1 ∈ M₁.eval x ∧ p.2 ∈ M₂.eval x := by
  induction x using List.reverseRecOn generalizing p with
  | nil => exact Iff.rfl
  | append_singleton x a ih =>
    rw [NFA.eval_append_singleton, NFA.mem_stepSet]
    constructor
    · rintro ⟨q, hq, hstep⟩
      rw [ih] at hq
      rw [NFA.eval_append_singleton, NFA.mem_stepSet, NFA.eval_append_singleton, NFA.
    mem_stepSet]
      exact ⟨⟨q.1, hq.1, hstep.1⟩, ⟨q.2, hq.2, hstep.2⟩⟩
    · rintro ⟨h1, h2⟩
      rw [NFA.eval_append_singleton, NFA.mem_stepSet] at h1 h2
      obtain ⟨q1, hq1, hs1⟩ := h1
      obtain ⟨q2, hq2, hs2⟩ := h2
      exact ⟨(q1, q2), (ih (q1, q2)).mpr ⟨hq1, hq2⟩, hs1, hs2⟩

theorem NFAinter_mem_accepts_iff (x : List Bool) :
    x ∈ (NFAinter M₁ M₂).accepts ↔ x ∈ M₁.accepts ∧ x ∈ M₂.accepts := by
  constructor
  · rintro ⟨p, hp, hpe⟩
    rw [NFAinter_mem_eval_iff] at hpe
    exact ⟨⟨p.1, hp.1, hpe.1⟩, ⟨p.2, hp.2, hpe.2⟩⟩
  · rintro ⟨⟨s, hs, hse⟩, ⟨t, ht, hte⟩⟩
    exact ⟨(s, t), ⟨hs, ht⟩, (NFAinter_mem_eval_iff M₁ M₂ x (s, t)).mpr ⟨hse, hte⟩⟩

end NFAinterLemmas

def autState : SExpr → Type
```

```
  | .sigma => Unit
  | .single σ => Option (Fin (σ.length + 1))
  | .cap a b => autState a × autState b
  | .cat a b => autState a ? autState b

theorem dfaToNFA_eval {σ : Type} (M : DFA Bool σ) (x : List Bool) :
    M.toNFA.eval x = {M.eval x} := by
  induction x using List.reverseRecOn with
  | nil => rfl
  | append_singleton x a ih =>
    rw [NFA.eval_append_singleton, ih]
    ext s
    rw [NFA.mem_stepSet]
    constructor
    · rintro ⟨t, ht, hs⟩
      rw [Set.mem_singleton_iff] at ht
      subst ht
      rw [Set.mem_singleton_iff, DFA.eval_append_singleton]
      exact hs
    · intro hs
      rw [Set.mem_singleton_iff, DFA.eval_append_singleton] at hs
      exact ⟨M.eval x, Set.mem_singleton _, hs⟩

theorem dfaToNFA_accepts {σ : Type} (M : DFA Bool σ) : M.toNFA.accepts = M.accepts :=
    by
  ext x
  constructor
  · rintro ⟨S, hS, hSe⟩
    rw [dfaToNFA_eval, Set.mem_singleton_iff] at hSe
    rw [DFA.mem_accepts, ← hSe]
    exact hS
  · intro hx
    rw [DFA.mem_accepts] at hx
    exact ⟨M.eval x, hx, by rw [dfaToNFA_eval]; exact Set.mem_singleton _⟩

instance instFintypeAutState : (e : SExpr) → Fintype (autState e)
  | .sigma => inferInstanceAs (Fintype Unit)
  | .single σ => inferInstanceAs (Fintype (Option (Fin (σ.length + 1))))
  | .cap a b => by
      letI := instFintypeAutState a; letI := instFintypeAutState b
      exact inferInstanceAs (Fintype (autState a × autState b))
  | .cat a b => by
      letI := instFintypeAutState a; letI := instFintypeAutState b
      exact inferInstanceAs (Fintype (autState a ? autState b))

instance instDecidableEqAutState : (e : SExpr) → DecidableEq (autState e)
  | .sigma => inferInstanceAs (DecidableEq Unit)
  | .single σ => inferInstanceAs (DecidableEq (Option (Fin (σ.length + 1))))
  | .cap a b => by
      letI := instDecidableEqAutState a; letI := instDecidableEqAutState b
      exact inferInstanceAs (DecidableEq (autState a × autState b))
  | .cat a b => by
      letI := instDecidableEqAutState a; letI := instDecidableEqAutState b
      exact inferInstanceAs (DecidableEq (autState a ? autState b))

def autStateCard : SExpr → ℕ
```

```
  | .sigma => 1
  | .single σ => σ.length + 2
  | .cap a b => autStateCard a * autStateCard b
  | .cat a b => autStateCard a + autStateCard b

end

section
variable {σ₁ σ₂ : Type}
variable {σ : Type}

section ShortWord

variable {σ : Type} [Fintype σ] {M : NFA Bool σ}

omit [Fintype σ] in
@[simp] theorem pathStateAt_zero {s t : σ} {x : List Bool} (p : M.Path s t x) :
    pathStateAt p 0 (Nat.zero_le _) = s := by
  cases x with
  | nil =>
    cases p; simp [pathStateAt, pathStateAtAux]
  | cons a xs =>
    cases p with
    | cons _ s' _ _ _ _ _ => simp [pathStateAt, pathStateAtAux]

theorem accepts_card_zero (hσ : Fintype.card σ = 0) {w : List Bool} (hw : w ∈ M.
    accepts) : False := by
  rw [NFA.mem_accepts] at hw
  obtain ⟨t, ht, hte⟩ := hw
  rw [NFA.mem_evalFrom_iff_exists (S := M.start) (s := t) (x := w)] at hte
  obtain ⟨s, hs, _⟩ := hte
  exact (Fintype.card_eq_zero_iff.mp hσ).elim s

theorem autStateCard_eq_card (e : SExpr) : autStateCard e = Fintype.card (autState e)
    := by
  induction e with
  | sigma =>
    simp [autStateCard, autState]
    exact (Fintype.card_unique (α := Unit)).symm
  | single σ =>
    simp only [autStateCard, autState]
    have h1 : Fintype.card (Option (Fin (σ.length + 1))) =
        Fintype.card (Fin (σ.length + 1)) + 1 :=
      Fintype.card_option (α := Fin (σ.length + 1))
    have h2 : Fintype.card (Fin (σ.length + 1)) = σ.length + 1 :=
      Fintype.card_fin (σ.length + 1)
    calc autStateCard (.single σ)
        = σ.length + 2 := rfl
      _ = (σ.length + 1) + 1 := rfl
      _ = Fintype.card (Fin (σ.length + 1)) + 1 := (congrArg (fun n => n + 1) h2).symm
      _ = Fintype.card (Option (Fin (σ.length + 1))) := h1.symm
  | cap a b ih_a ih_b =>
    simp [autStateCard, autState, ih_a, ih_b]
    exact (Fintype.card_prod (autState a) (autState b)).symm
  | cat a b ih_a ih_b =>
    simp [autStateCard, autState, ih_a, ih_b]
```

```
    exact (Fintype.card_sum (α := autState a) (β := autState b)).symm

end ShortWord

def decideNonemptyB (e : SExpr) : Bool :=
  anyMatchesB e (wordsUpTo (autStateCard e))

def decideEmptyB (e : SExpr) : Bool := !decideNonemptyB e

section ShortWord

variable {σ : Type} [Fintype σ] {M : NFA Bool σ}

omit [Fintype σ] in
theorem mem_accepts_of_path {s t : σ} {x : List Bool} (hs : s ∈ M.start) (ht : t ∈ M.
    accept)
    (p : M.Path s t x) : x ∈ M.accepts := by
  rw [NFA.accepts_iff_exists_path]
  exact ⟨s, hs, t, ht, ⟨p⟩⟩

def pathAppend {s u t : σ} {a b : List Bool} (p : M.Path s u a) (p' : M.Path u t b) :
    M.Path s t (a ++ b) :=
  match p with
  | .nil _ => p'
  | .cons sMid s' _ a' xs hstep p'' =>
      .cons sMid s' _ a' (xs ++ b) hstep (pathAppend p'' p')

omit [Fintype σ] in
theorem pathStateAt_succ {sMid s' u : σ} {a : Bool} {xs : List Bool}
    (hstep : sMid ∈ M.step s' a) (p' : M.Path sMid u xs) (n : ℕ) (hn : n ≤ xs.length)
    :
    pathStateAt (.cons sMid s' u a xs hstep p') (n + 1) (Nat.succ_le_succ hn) =
      pathStateAt p' n hn := by
  simp [pathStateAt, pathStateAtAux]

noncomputable def pathAppend_take_drop {s t : σ} {x : List Bool} (p : M.Path s t x) (n
    : ℕ)
    (hn : n ≤ x.length) : PathSplit p n hn := by
  revert n hn
  induction p with
  | nil s =>
    intro n hn
    have hn0 : n = 0 := Nat.eq_zero_of_le_zero hn
    subst hn0
    exact { u := s, hp := .nil s, ht := .nil s, hu := by rfl }
  | cons sMid s' u a xs hstep p' ih =>
    intro n hn
    cases n with
    | zero =>
      exact { u := s', hp := .nil s', ht := .cons sMid s' u a xs hstep p', hu := by
    rfl }
    | succ n' =>
      have hn' : n' ≤ xs.length := by simpa [List.length_cons] using hn
      have split := ih n' hn'
      exact {
        u := split.u
```

```
        hp := .cons sMid s' split.u a (xs.take n') hstep split.hp
        ht := split.ht
        hu := by rw [pathStateAt_succ hstep p' n' hn']; exact split.hu
      }

omit [Fintype σ] in
theorem accepts_skip_loop {s t : σ} {x : List Bool} {i j : ℕ}
    (hi : i ≤ x.length) (hj : j ≤ x.length) (_hij : i < j)
    (hs : s ∈ M.start) (ht : t ∈ M.accept) (hp : M.Path s t x)
    (heq : pathStateAt hp i hi = pathStateAt hp j hj) :
    x.take i ++ x.drop j ∈ M.accepts := by
  let splitI := pathAppend_take_drop hp i hi
  let splitJ := pathAppend_take_drop hp j hj
  have hqq' : splitI.u = splitJ.u := by rw [← splitI.hu, heq, splitJ.hu]
  exact mem_accepts_of_path hs ht (pathAppend splitI.hp (hqq' ▸ splitJ.ht))

theorem accepts_shorten_step {x : List Bool} (hx : x ∈ M.accepts)
    (hlen : Fintype.card σ ≤ x.length) :
    ∃ y, y ∈ M.accepts ∧ y.length < x.length := by
  rw [NFA.accepts_iff_exists_path] at hx
  obtain ⟨s, hs, t, ht, ⟨hp⟩⟩ := hx
  obtain ⟨i, j, hne, heq⟩ :=
    Fintype.exists_ne_map_eq_of_card_lt
      (f := fun k : Fin (x.length + 1) => pathStateAt hp k.val (Nat.le_of_lt_succ k.
    isLt))
      (by rw [Fintype.card_fin]; exact Nat.lt_succ_iff.mpr hlen)
  have hval : i.val = j.val := fun h => hne (Fin.ext h)
  rcases Nat.lt_or_gt_of_ne hval with hij | hij
  · refine ⟨x.take i.val ++ x.drop j.val, ?_, ?_⟩
    · exact accepts_skip_loop (by omega) (by omega) hij hs ht hp heq
    · have : j.val - i.val > 0 := Nat.sub_pos_of_lt hij


      simp [List.length_append, List.length_take, List.length_drop]
      omega
  · refine ⟨x.take j.val ++ x.drop i.val, ?_, ?_⟩
    · exact accepts_skip_loop (by omega) (by omega) hij hs ht hp heq.symm
    · have : i.val - j.val > 0 := Nat.sub_pos_of_lt hij
      simp [List.length_append, List.length_take, List.length_drop]
      omega

theorem exists_accepted_word_short (h : M.accepts.Nonempty) :
    ∃ w, w.length < Fintype.card σ ∧ w ∈ M.accepts := by
  by_cases hσ : Fintype.card σ = 0
  · obtain ⟨x, hx⟩ := h
    exact (accepts_card_zero hσ hx).elim
  · obtain ⟨x, hx⟩ := h
    exact Nat.strongRecOn x.length
      (motive := fun n =>
        ∀ w, w.length = n → w ∈ M.accepts → ∃ u, u.length < Fintype.card σ ∧ u ∈ M.
    accepts)
      (fun n ih w hwlen hw => by
        by_cases hlt : n < Fintype.card σ
        · exact ⟨w, hwlen ▸ hlt, hw⟩
        · have hge : Fintype.card σ ≤ n := Nat.not_lt.mp hlt
          obtain ⟨y, hy, hylt⟩ := accepts_shorten_step hw (hwlen.symm ▸ hge)
          exact ih y.length (Nat.lt_of_lt_of_eq hylt hwlen) y rfl hy)
```

```
      x rfl hx

end ShortWord

end

section
variable {σ₁ σ₂ : Type}

def toNFA : (e : SExpr) → NFA Bool (autState e)
  | .sigma => sigmaDFA.toNFA
  | .single σ => (singleDFA σ).toNFA
  | .cap a b => NFAinter (toNFA a) (toNFA b)
  | .cat a b => (catEps (toNFA a) (toNFA b)).toNFA

theorem toNFA_accepts : (e : SExpr) → (toNFA e).accepts = denote e
  | .sigma => by
      change sigmaDFA.toNFA.accepts = denote .sigma
      rw [dfaToNFA_accepts sigmaDFA, sigmaDFA_accepts, denote_sigma]
  | .single σ => by
      change (singleDFA σ).toNFA.accepts = denote (.single σ)
      rw [dfaToNFA_accepts (singleDFA σ)]
      exact singleDFA_accepts_denote σ
  | .cap a b => by
      ext x
      change x ∈ (NFAinter (toNFA a) (toNFA b)).accepts ↔ _
      rw [NFAinter_mem_accepts_iff, toNFA_accepts a, toNFA_accepts b, denote_cap]
      exact (Set.mem_inter_iff x (denote a) (denote b)).symm
  | .cat a b => by
      change (catEps (toNFA a) (toNFA b)).toNFA.accepts = denote (.cat a b)
      rw [?NFA.toNFA_correct, catEps_accepts, toNFA_accepts a, toNFA_accepts b,
    denote_cat]

end

section
variable {σ₁ σ₂ : Type}
variable {σ : Type}

section ShortWord

variable {σ : Type} [Fintype σ] {M : NFA Bool σ}

theorem denote_nonempty_iff_short (e : SExpr) :
    (denote e).Nonempty ↔ ∃ w ∈ wordsUpTo (autStateCard e), matchesB e w = true := by
  have hc : autStateCard e = Fintype.card (autState e) := autStateCard_eq_card e
  constructor
  · intro hne
    rw [← toNFA_accepts e] at hne
    obtain ⟨w, hwlt, hw⟩ := exists_accepted_word_short hne
    refine ⟨w, ?_, ?_⟩
    · rw [mem_wordsUpTo, hc]; omega
    · rw [matchesB_iff, ← toNFA_accepts e]; exact hw
  · intro ⟨w, hwmem, hmatch⟩
    rw [mem_wordsUpTo, hc] at hwmem
    exact ⟨w, (matchesB_iff e w).mp hmatch⟩
```

```
end ShortWord

@[simp] theorem decideNonemptyB_iff (e : SExpr) :
    decideNonemptyB e = true ↔ (denote e).Nonempty := by
  simp [decideNonemptyB, anyMatchesB, List.any_eq_true, denote_nonempty_iff_short]

@[simp] theorem decideEmptyB_iff (e : SExpr) :
    decideEmptyB e = true ↔ denote e = ∅ := by
  rw [decideEmptyB, Bool.not_eq_true_eq_eq_false, ← Bool.eq_false_eq_not_eq_true,
    decideNonemptyB_iff, Set.not_nonempty_iff_eq_empty]

instance decidableEmptyDenote (e : SExpr) : Decidable (denote e = ∅) :=
  if h : decideEmptyB e then .isTrue (decideEmptyB_iff e |>.mp h)
  else .isFalse fun he => h (decideEmptyB_iff e |>.mpr he)

#eval decideEmptyB (.cap (.single [false]) (.single [true]))

def consistentB (a b : SExpr) : Bool := !decideEmptyB (.cap a b)

end

section
variable {σ₁ σ₂ : Type}

example : DecidableEq (autState (.sigma : SExpr)) := inferInstance
example : DecidableEq (autState (.single [true, false] : SExpr)) := inferInstance

variable {σ : Type}

@[simp] theorem consistentB_iff (a b : SExpr) :
    consistentB a b = true ↔ (denote (.cap a b)).Nonempty := by
  have h : consistentB a b = decideNonemptyB (.cap a b) := by
    simp [consistentB, decideEmptyB, decideNonemptyB]
  rw [h, decideNonemptyB_iff]

@[simp] theorem capNonempty_iff_consistent (a b : SExpr) :
    (denote a ∩ denote b).Nonempty ↔ consistentB a b = true := by
  rw [← denote_cap, consistentB_iff]
end

section
variable {σ₁ σ₂ : Type}

theorem autStateCard_le_card (e : SExpr) : autStateCard e ≤ Fintype.card (autState e)
    := by
  induction e with
  | sigma =>
    simp [autStateCard, autState]
    exact (Fintype.card_unique (α := Unit)).ge
  | single σ =>
    have heq : autStateCard (.single σ) = Fintype.card (autState (.single σ)) := by
      simp only [autStateCard, autState]
      have h1 : Fintype.card (Option (Fin (σ.length + 1))) =
          Fintype.card (Fin (σ.length + 1)) + 1 :=
        Fintype.card_option (α := Fin (σ.length + 1))
```

```
      have h2 : Fintype.card (Fin (σ.length + 1)) = σ.length + 1 :=
        Fintype.card_fin (σ.length + 1)
      calc σ.length + 2
          = (σ.length + 1) + 1 := rfl
        _ = Fintype.card (Fin (σ.length + 1)) + 1 := (congrArg (fun n => n + 1) h2).
    symm
        _ = Fintype.card (Option (Fin (σ.length + 1))) := h1.symm
    exact Nat.le_of_eq heq
  | cap a b ih_a ih_b =>
    simp only [autStateCard, autState]
    exact (Nat.mul_le_mul ih_a ih_b).trans (Fintype.card_prod (autState a) (autState b
    )).ge
  | cat a b ih_a ih_b =>
    simp only [autStateCard, autState]
    exact (Nat.add_le_add ih_a ih_b).trans (Fintype.card_sum (α := autState a) (β :=
    autState b)).ge
end

end Exercise722
end DomainTheory.NeighbourhoodSystems
end
```

3.8.25 Exercise 7.23 — graph and fun computable

Complete the discussion of $P\mathbf{N}$ of Example 7.8. Show that the combinators fun and graph of Exercise 5.14 are computable. Also do the same for

$$\lambda x, y.\, x \cap y, \quad \lambda x, y.\, x \cup y, \quad \text{and } \lambda x, y.\, x + y,$$

where for $x, y \in P\mathbf{N}$ we define

$$x + y = \{n + m \mid n \in x \text{ and } m \in y\}.$$

What are the computable elements of $P\mathbf{N}$?

Exercise_7_23.lean

```
module

public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Exercise_5_14

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_12
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Example_7_8

public import Mathlib.Data.Nat.Bitwise

@[expose] public section

section

namespace DomainTheory.NeighbourhoodSystems.Exercise723
```

```
open DomainTheory.NeighbourhoodSystems Example78 NeighborhoodSystem Domain.Recursive

open DomainTheory.NeighbourhoodSystems.Exercise513 (tri num numP unnum nextCell
    numP_unnum)

open DomainTheory.NeighbourhoodSystems.Exercise514 (tag tag_nil tag_cons Fun Fun_mono
    entries
  num_succ_left_gt tag_injective)

def capMap : ApproximableMap (prod PN PN) PN where
  rel W Z := ∃ X Y, W = prodNbhd X Y ∧ PN.mem X ∧ PN.mem Y ∧ PN.mem Z ∧ X ⊆ Z ∧ Y ⊆ Z
  rel_dom := by rintro W Z ⟨X, Y, rfl, hX, hY, _, _, _⟩; exact prod_mem_prodNbhd hX hY
  rel_cod := by rintro W Z ⟨X, Y, rfl, _, _, hZ, _, _⟩; exact hZ
  master_rel := ⟨Set.univ, Set.univ, rfl, PN.master_mem, PN.master_mem, PN.master_mem,
    Set.subset_univ _, Set.subset_univ _⟩
  inter_right := by
    rintro W Z Z' ⟨X, Y, rfl, hX, hY, hZ, hXZ, hYZ⟩ ⟨X', Y', heq, _, _, hZ', hXZ', hYZ'⟩
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    obtain ⟨k, hk⟩ := hZ; obtain ⟨k', hk'⟩ := hZ'; subst hk; subst hk'
    exact ⟨X, Y, rfl, hX, hY, ⟨myLor k k', nbhd_inter k k'⟩,
      Set.subset_inter hXZ hXZ', Set.subset_inter hYZ hYZ'⟩
  mono := by
    rintro W W' Z Z' ⟨X, Y, rfl, hX, hY, hZ, hXZ, hYZ⟩ hW'W hZZ' hW' hZ'
    obtain ⟨X', Y', hX', hY', rfl⟩ := hW'
    obtain ⟨hXX', hYY'⟩ := prodNbhd_subset_iff.mp hW'W
    exact ⟨X', Y', rfl, hX', hY', hZ', hXX'.trans (hXZ.trans hZZ'), hYY'.trans (hYZ.
    trans hZZ')⟩

end DomainTheory.NeighbourhoodSystems.Exercise723
end

section
namespace DomainTheory.NeighbourhoodSystems.Exercise723
open DomainTheory.NeighbourhoodSystems Example78 NeighborhoodSystem Domain.Recursive
open DomainTheory.NeighbourhoodSystems.Exercise513 (tri num numP unnum nextCell
    numP_unnum)
open DomainTheory.NeighbourhoodSystems.Exercise514 (tag tag_nil tag_cons Fun Fun_mono
    entries
  num_succ_left_gt tag_injective)

section

def halfIter (n k : ℕ) : ℕ := (fun x : ℕ => x / 2)^[k] n
end

section
@[simp] theorem halfIter_zero (n : ℕ) : halfIter n 0 = n := rfl
end

section

def bitAt (n k : ℕ) : ℕ := halfIter n k % 2
end

section
```

```
def cupMap : ApproximableMap (prod PN PN) PN where
  rel W Z := ∃ X Y, W = prodNbhd X Y ∧ PN.mem X ∧ PN.mem Y ∧ PN.mem Z ∧ X ∩ Y ⊆ Z
  rel_dom := by rintro W Z ⟨X, Y, rfl, hX, hY, _, _⟩; exact prod_mem_prodNbhd hX hY
  rel_cod := by rintro W Z ⟨X, Y, rfl, _, _, hZ, _⟩; exact hZ
  master_rel := ⟨Set.univ, Set.univ, rfl, PN.master_mem, PN.master_mem, PN.master_mem,
    Set.inter_subset_left.trans (Set.subset_univ _)⟩
  inter_right := by
    rintro W Z Z' ⟨X, Y, rfl, hX, hY, hZ, hXYZ⟩ ⟨X', Y', heq, _, _, hZ', hXYZ'⟩
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    obtain ⟨k, hk⟩ := hZ; obtain ⟨k', hk'⟩ := hZ'; subst hk; subst hk'
    exact ⟨X, Y, rfl, hX, hY, ⟨myLor k k', nbhd_inter k k'⟩, Set.subset_inter hXYZ hXYZ
    '⟩
  mono := by
    rintro W W' Z Z' ⟨X, Y, rfl, hX, hY, hZ, hXYZ⟩ hW'W hZZ' hW' hZ'
    obtain ⟨X', Y', hX', hY', rfl⟩ := hW'
    obtain ⟨hXX', hYY'⟩ := prodNbhd_subset_iff.mp hW'W
    exact ⟨X', Y', rfl, hX', hY', hZ',
      (Set.inter_subset_inter hXX' hYY').trans (hXYZ.trans hZZ')⟩
end

section

def sumSet (X Y : Set ℕ) : Set ℕ := {k | ∃ a ∈ X, ∃ b ∈ Y, a + b = k}
end

section
@[inherit_doc] infixl:65 " +ˢ " => sumSet
end

section

theorem compl_inter_nbhd (a b : ℕ) : (nbhd a ∩ nbhd b)? = (nbhd a)? ∪ (nbhd b)? := by
  ext x
  simp only [Set.mem_compl_iff, Set.mem_inter_iff, Set.mem_union, mem_nbhd]
  cases a.testBit x <;> cases b.testBit x <;> decide
end

section

theorem compl_subset_compl_of_subset {X Y : Set ℕ} (h : X ⊆ Y) : Y? ⊆ X? :=
  fun _ hx hxX => hx (h hxX)
end

section

def elemSet (x : PN.Element) : Set ℕ := {k | ∃ n, x.mem (nbhd n) ∧ n.testBit k = true}
end

section
@[simp] theorem mem_elemSet {x : PN.Element} {k : ℕ} :
    k ∈ elemSet x ↔ ∃ n, x.mem (nbhd n) ∧ n.testBit k = true := Iff.rfl
end

section
```

```
def bitsCode : ℕ → ℕ → ℕ
  | _, 0 => 0
  | n, N + 1 => selectFn (bitAt n N) (Nat.pair N (bitsCode n N) + 1) (bitsCode n N)
end

section

def bitsList (n : ℕ) : List ℕ := (List.range n).filter (fun k => n.testBit k)
end

section

def bitsStep (s : ℕ) : ℕ :=
  Nat.pair s.unpair.1
    (Nat.pair (s.unpair.2.unpair.1 + 1)
      (selectFn (bitAt s.unpair.1 s.unpair.2.unpair.1)
        (Nat.pair s.unpair.2.unpair.1 s.unpair.2.unpair.2 + 1) s.unpair.2.unpair.2))
end

section

def gMap : ApproximableMap (prod PN PN) PN where
  rel W Z := ∃ X Y, W = prodNbhd X Y ∧ PN.mem X ∧ PN.mem Y ∧ PN.mem Z ∧ Z? ⊆ Fun X? Y?
  rel_dom := by rintro W Z ⟨X, Y, rfl, hX, hY, _, _⟩; exact prod_mem_prodNbhd hX hY
  rel_cod := by rintro W Z ⟨X, Y, rfl, _, _, hZ, _⟩; exact hZ
  master_rel := ⟨Set.univ, Set.univ, rfl, PN.master_mem, PN.master_mem, PN.master_mem,
    fun x hx => absurd (Set.mem_univ x) hx⟩
  inter_right := by
    rintro W Z Z' ⟨X, Y, rfl, hX, hY, hZ, hsub⟩ ⟨X', Y', heq, _, _, hZ', hsub'⟩
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    obtain ⟨k, hk⟩ := hZ; obtain ⟨k', hk'⟩ := hZ'; subst hk; subst hk'
    refine ⟨X, Y, rfl, hX, hY, ⟨myLor k k', nbhd_inter k k'⟩, ?_⟩
    rw [compl_inter_nbhd]
    exact Set.union_subset hsub hsub'
  mono := by
    rintro W W' Z Z' ⟨X, Y, rfl, hX, hY, hZ, hsub⟩ hW'W hZZ' hW' hZ'
    obtain ⟨X', Y', hX', hY', rfl⟩ := hW'
    obtain ⟨hXX', hYY'⟩ := prodNbhd_subset_iff.mp hW'W
    refine ⟨X', Y', rfl, hX', hY', hZ', ?_⟩
    calc Z'? ⊆ Z? := compl_subset_compl_of_subset hZZ'
      _ ⊆ Fun X? Y? := hsub
      _ ⊆ Fun X'? Y'? :=
        Fun_mono (compl_subset_compl_of_subset hXX') (compl_subset_compl_of_subset hYY
    ')
end

section

def funMap : ApproximableMap PN (funSpace PN PN) := curry gMap
end

section

def nextCellStep (w : ℕ) : ℕ :=
  selectFn (isZero w.unpair.1) (Nat.pair (w.unpair.2 + 1) 0)
    (Nat.pair (w.unpair.1 - 1) (w.unpair.2 + 1))
```

```
end

section

def orUpTo (n m : ℕ) : ℕ → ℕ
  | 0 => 0
  | k + 1 => myLor (orUpTo n m k) (selectFn (bitAt n k) (m <<< k) 0)
end

section

def plusIdx (n m : ℕ) : ℕ := orUpTo n m n
end

section

def plusStep (s : ℕ) : ℕ :=
  Nat.pair (Nat.pair s.unpair.1.unpair.1 s.unpair.1.unpair.2)
    (Nat.pair (s.unpair.2.unpair.1 + 1)
      (myLor s.unpair.2.unpair.2
        (selectFn (bitAt s.unpair.1.unpair.1 s.unpair.2.unpair.1)
          (s.unpair.1.unpair.2 <<< s.unpair.2.unpair.1) 0)))
end

section
theorem sumSet_mono {X X' Y Y' : Set ℕ} (hX : X ⊆ X') (hY : Y ⊆ Y') : X +ˢ Y ⊆ X' +ˢ Y
    ' := by
  rintro k ⟨a, ha, b, hb, rfl⟩
  exact ⟨a, hX ha, b, hY hb, rfl⟩
end

section

def plusMap : ApproximableMap (prod PN PN) PN where
  rel W Z := ∃ X Y, W = prodNbhd X Y ∧ PN.mem X ∧ PN.mem Y ∧ PN.mem Z ∧ Z? ⊆ X? +ˢ Y?
  rel_dom := by rintro W Z ⟨X, Y, rfl, hX, hY, _, _⟩; exact prod_mem_prodNbhd hX hY
  rel_cod := by rintro W Z ⟨X, Y, rfl, _, _, hZ, _⟩; exact hZ
  master_rel := ⟨Set.univ, Set.univ, rfl, PN.master_mem, PN.master_mem, PN.master_mem,
    fun x hx => absurd (Set.mem_univ x) hx⟩
  inter_right := by
    rintro W Z Z' ⟨X, Y, rfl, hX, hY, hZ, hsub⟩ ⟨X', Y', heq, _, _, hZ', hsub'⟩
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    obtain ⟨k, hk⟩ := hZ; obtain ⟨k', hk'⟩ := hZ'; subst hk; subst hk'
    refine ⟨X, Y, rfl, hX, hY, ⟨myLor k k', nbhd_inter k k'⟩, ?_⟩
    rw [compl_inter_nbhd]
    exact Set.union_subset hsub hsub'
  mono := by
    rintro W W' Z Z' ⟨X, Y, rfl, hX, hY, hZ, hsub⟩ hW'W hZZ' hW' hZ'
    obtain ⟨X', Y', hX', hY', rfl⟩ := hW'
    obtain ⟨hXX', hYY'⟩ := prodNbhd_subset_iff.mp hW'W
    refine ⟨X', Y', rfl, hX', hY', hZ', ?_⟩
    calc Z'? ⊆ Z? := compl_subset_compl_of_subset hZZ'
      _ ⊆ X? +ˢ Y? := hsub
      _ ⊆ X'? +ˢ Y'? :=
        sumSet_mono (compl_subset_compl_of_subset hXX') (compl_subset_compl_of_subset
    hYY')
```

```
end

section

def tagStep (w : ℕ) : ℕ := num (w.unpair.1 + 1) w.unpair.2.unpair.1
end

section

def tagCode (code m : ℕ) : ℕ := foldCode tagStep 0 (num 0 m) (appendCode 0 code)
end

section

def tagOfBits (j m : ℕ) : ℕ := tagCode (bitsCode j j) m
end

section

def GraphIdx (W : Set (ApproximableMap PN PN)) : Set ℕ :=
  {c | ∃ n m₀ m, c = tagOfBits n m ∧ (∀ f ∈ W, f.rel (nbhd n) (nbhd m₀)) ∧ m₀.testBit m
     = true}
end

section

theorem GraphIdx_mono {W W' : Set (ApproximableMap PN PN)} (h : W' ⊆ W) :
    GraphIdx W ⊆ GraphIdx W' := by
  rintro c ⟨n, m₀, m, rfl, hf, hbit⟩
  exact ⟨n, m₀, m, rfl, fun f hf' => hf f (h hf'), hbit⟩
end

section

def graphMap : ApproximableMap (funSpace PN PN) PN where
  rel W Z := (funSpace PN PN).mem W ∧ PN.mem Z ∧ Z? ⊆ GraphIdx W
  rel_dom := fun ⟨h, _, _⟩ => h
  rel_cod := fun ⟨_, h, _⟩ => h
  master_rel := ⟨(funSpace PN PN).master_mem, PN.master_mem, by
    show (Set.univ : Set ℕ)? ⊆ GraphIdx Set.univ
    intro x hx
    exact absurd (Set.mem_univ x) hx⟩
  inter_right := by
    rintro W Z Z' ⟨hW, hZ, hsub⟩ ⟨_, hZ', hsub'⟩
    obtain ⟨k, hk⟩ := hZ; obtain ⟨k', hk'⟩ := hZ'; subst hk; subst hk'
    refine ⟨hW, ⟨myLor k k', nbhd_inter k k'⟩, ?_⟩
    rw [compl_inter_nbhd]
    exact Set.union_subset hsub hsub'
  mono := by
    rintro W W' Z Z' ⟨hW, hZ, hsub⟩ hW'W hZZ' hW' hZ'
    obtain ⟨k', rfl⟩ := hZ'
    refine ⟨hW', ⟨k', rfl⟩, ?_⟩
    calc (nbhd k')? ⊆ Z? := compl_subset_compl_of_subset hZZ'
      _ ⊆ GraphIdx W := hsub
      _ ⊆ GraphIdx W' := GraphIdx_mono hW'W
end
```

```
section

def unnumPair (v : ℕ) : ℕ := nextCellStep^[v] (Nat.pair 0 0)
end

section

def unnum1 (v : ℕ) : ℕ := (unnumPair v).unpair.1
end

section

def unnum2 (v : ℕ) : ℕ := (unnumPair v).unpair.2
end

section

def untagRef (c : ℕ) : List ℕ × ℕ :=
  if _h : (unnum c).1 = 0 then ([], (unnum c).2)
  else
    have hlt : (unnum c).2 < c := by
      have heq : num (unnum c).1 (unnum c).2 = c := by
        have h := numP_unnum c
        simpa [numP] using h
      obtain ⟨k, hk⟩ : ∃ k, (unnum c).1 = k + 1 := ⟨(unnum c).1 - 1, by omega⟩
      rw [hk] at heq
      have hb := num_succ_left_gt k (unnum c).2
      omega
    (((unnum c).1 - 1) :: (untagRef (unnum c).2).1, (untagRef (unnum c).2).2)
termination_by c
decreasing_by all_goals exact hlt
end

section

def untagStep (w : ℕ) : ℕ :=
  selectFn w.unpair.2.unpair.1 w
    (selectFn (isZero (unnum1 w.unpair.1))
      (Nat.pair (unnum2 w.unpair.1)
        (Nat.pair 1 (Nat.pair w.unpair.2.unpair.2.unpair.1 (unnum2 w.unpair.1))))
      (Nat.pair (unnum2 w.unpair.1)
        (Nat.pair 0
          (Nat.pair (Nat.pair (unnum1 w.unpair.1 - 1) w.unpair.2.unpair.2.unpair.1 +
   1)
            w.unpair.2.unpair.2.unpair.2))))
end

section

def untagState (c : ℕ) : ℕ := untagStep^[c + 1] (Nat.pair c (Nat.pair 0 (Nat.pair 0 0)
   ))
end

section
```

```
def untagList (c : ℕ) : ℕ := appendCode 0 (untagState c).unpair.2.unpair.2.unpair.1
end

section

def untagVal (c : ℕ) : ℕ := (untagState c).unpair.2.unpair.2.unpair.2
end

section

theorem lt_of_testBit_true {n i : ℕ} (h : n.testBit i = true) : i < n := by
  by_contra hle
  have hle' : n ≤ i := by omega
  have hlt : n < 2 ^ i := lt_of_le_of_lt hle' Nat.lt_two_pow_self
  rw [Nat.testBit_eq_false_of_lt hlt] at h
  exact absurd h (by decide)

theorem halfIter_succ (n k : ℕ) : halfIter n (k + 1) = halfIter (n / 2) k := by
  unfold halfIter; rw [Function.iterate_succ_apply]

theorem primrec_halfIter : Nat.Primrec (fun t => halfIter t.unpair.1 t.unpair.2) := by
  have hstep : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2 / 2) :=
    primrec_div2.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  refine (Nat.Primrec.prec primrec_id hstep).of_eq (fun t => ?_)
  simp only [Nat.unpaired, unpair_pair_snd]
  exact rec_const_iterate (fun x => x / 2) t.unpair.1 t.unpair.2

theorem primrec_bitAt : Nat.Primrec (fun t => bitAt t.unpair.1 t.unpair.2) :=
  primrec_mod2.comp primrec_halfIter

theorem bitAt_le_one (n k : ℕ) : bitAt n k ≤ 1 := by unfold bitAt; omega

theorem bitAt_eq_one_iff (n k : ℕ) : bitAt n k = 1 ↔ n.testBit k = true := by
  induction k generalizing n with
  | zero =>
    show n % 2 = 1 ↔ n.testBit 0 = true
    rw [Nat.testBit_zero, decide_eq_true_iff]
  | succ k ih =>
    show halfIter n (k + 1) % 2 = 1 ↔ n.testBit (k + 1) = true
    rw [halfIter_succ, Nat.testBit_add_one]
    exact ih (n / 2)

theorem compl_nbhd (n : ℕ) : (nbhd n)? = {k | n.testBit k = true} := by
  ext k; simp [nbhd]

theorem exists_combined_witness (x : PN.Element) :
    ∀ L : List ℕ, (∀ k ∈ L, ∃ m, x.mem (nbhd m) ∧ m.testBit k = true) →
      ∃ m₀, x.mem (nbhd m₀) ∧ ∀ k ∈ L, m₀.testBit k = true
  | [] => fun _ => ⟨0, nbhd_zero ▸ x.master_mem, by simp⟩
  | k :: L => by
    intro hL
    obtain ⟨mk, hmk, hbk⟩ := hL k List.mem_cons_self
    obtain ⟨m₀, hm₀, hall⟩ :=
      exists_combined_witness x L (fun j hj => hL j (List.mem_cons_of_mem k hj))
    refine ⟨myLor mk m₀, ?_, ?_⟩
    · rw [← nbhd_inter]; exact x.inter_mem hmk hm₀
```

```
    · intro j hj
      rw [myLor_eq_lor, Nat.testBit_lor, Bool.or_eq_true]
      rcases List.mem_cons.mp hj with rfl | hj
      · exact Or.inl hbk
      · exact Or.inr (hall j hj)


theorem mem_bitsList {n k : ℕ} : k ∈ bitsList n ↔ n.testBit k = true := by
  unfold bitsList
  rw [List.mem_filter, List.mem_range]
  exact ⟨fun h => h.2, fun h => ⟨lt_of_testBit_true h, h⟩⟩

theorem nbhd_mem_iff_subset_elemSet (x : PN.Element) (n : ℕ) :
    x.mem (nbhd n) ↔ (nbhd n)? ⊆ elemSet x := by
  rw [compl_nbhd]
  constructor
  · intro hn k hk
    exact ⟨n, hn, hk⟩
  · intro hsub
    obtain ⟨m₀, hm₀, hall⟩ :=
      exists_combined_witness x (bitsList n) (fun k hk => hsub (mem_bitsList.mp hk))
    have hincl : nbhd m₀ ⊆ nbhd n := by
      intro k hk
      simp only [mem_nbhd] at hk ⊢
      cases hn2 : n.testBit k with
      | false => rfl
      | true =>
        have hcontra := hall k (mem_bitsList.mpr hn2)
        rw [hk] at hcontra
        exact absurd hcontra (by decide)
    exact x.up_mem hm₀ ⟨n, rfl⟩ hincl

theorem elemSet_re_of_isComputableElement {x : PN.Element} (hx : ComputableElement
    PNpres x) :
    REPred (fun k => k ∈ elemSet x) := by
  have hx' : REPred (fun n => x.mem (nbhd n)) := hx.out
  have hbit : RecDecidable (fun t : ℕ => t.unpair.1.testBit t.unpair.2 = true) :=
    ⟨fun t => bitAt t.unpair.1 t.unpair.2, primrec_bitAt, fun t => (bitAt_eq_one_iff _
    _).symm⟩
  have hand : REPred (fun t : ℕ => x.mem (nbhd t.unpair.1) ∧ t.unpair.1.testBit t.
    unpair.2 = true) :=
    (hx'.comp Nat.Primrec.left).and hbit.re
  refine REPred.of_iff (fun k => ?_) hand.proj
  simp only [mem_elemSet, unpair_pair_fst, unpair_pair_snd]

theorem mem_decodeList_bitsCode (n : ℕ) :
    ∀ N k, k ∈ decodeList (bitsCode n N) ↔ k < N ∧ n.testBit k = true
  | 0, k => by simp [bitsCode, decodeList_zero]
  | N + 1, k => by
    show k ∈ decodeList (selectFn (bitAt n N) (Nat.pair N (bitsCode n N) + 1) (
    bitsCode n N)) ↔ _
    by_cases hbit : n.testBit N = true
    · rw [(bitAt_eq_one_iff n N).mpr hbit, selectFn_one, decodeList_succ,
    unpair_pair_fst,
        unpair_pair_snd, List.mem_cons, mem_decodeList_bitsCode n N k]
      constructor
```

```
      · rintro (rfl | ⟨hkN, hk⟩)
        · exact ⟨by omega, hbit⟩
        · exact ⟨by omega, hk⟩
      · rintro ⟨hkN1, hk⟩
        rcases (show k < N ∨ k = N by omega) with hkN | hkN
        · exact Or.inr ⟨hkN, hk⟩
        · exact Or.inl hkN
    · have hne1 : bitAt n N = 1 := fun h => hbit ((bitAt_eq_one_iff n N).mp h)
      have hle := bitAt_le_one n N
      have hnbit : bitAt n N = 0 := by omega
      rw [hnbit, selectFn_zero, mem_decodeList_bitsCode n N k]
      constructor
      · rintro ⟨hkN, hk⟩
        exact ⟨Nat.lt_succ_of_lt hkN, hk⟩
      · rintro ⟨hkN1, hk⟩
        rcases (show k < N ∨ k = N by omega) with hkN | hkN
        · exact ⟨hkN, hk⟩
        · subst hkN; exact absurd hk hbit

theorem primrec_bitsStep : Nat.Primrec bitsStep := by
  have hn : Nat.Primrec (fun s : ℕ => s.unpair.1) := Nat.Primrec.left
  have hN : Nat.Primrec (fun s : ℕ => s.unpair.2.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.right
  have hacc : Nat.Primrec (fun s : ℕ => s.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hbit : Nat.Primrec (fun s : ℕ => bitAt s.unpair.1 s.unpair.2.unpair.1) :=
    (primrec_bitAt.comp (hn.pair hN)).of_eq fun s => by simp only [unpair_pair_fst,
    unpair_pair_snd]
  have hcons : Nat.Primrec (fun s : ℕ => Nat.pair s.unpair.2.unpair.1 s.unpair.2.
    unpair.2 + 1) :=
    Nat.Primrec.succ.comp ((hN.pair hacc).of_eq fun _ => rfl)
  have hsel := primrec_selectFn hbit hcons hacc
  exact (hn.pair ((primrec_add₂ hN (Nat.Primrec.const 1)).pair hsel)).of_eq fun _ =>
    rfl

theorem bitsStep_unpair11 (s : ℕ) : (bitsStep s).unpair.1 = s.unpair.1 := by
  unfold bitsStep; rw [unpair_pair_fst]

theorem bitsStep_unpair21 (s : ℕ) : (bitsStep s).unpair.2.unpair.1 = s.unpair.2.unpair
    .1 + 1 := by
  unfold bitsStep; rw [unpair_pair_snd, unpair_pair_fst]

theorem bitsStep_unpair22 (s : ℕ) : (bitsStep s).unpair.2.unpair.2 =
    selectFn (bitAt s.unpair.1 s.unpair.2.unpair.1)
      (Nat.pair s.unpair.2.unpair.1 s.unpair.2.unpair.2 + 1) s.unpair.2.unpair.2 := by
  unfold bitsStep; rw [unpair_pair_snd, unpair_pair_snd]

theorem bitsStep_iter_spec (n : ℕ) (k : ℕ) :
    (bitsStep^[k] (Nat.pair n (Nat.pair 0 0))).unpair.1 = n ∧
    (bitsStep^[k] (Nat.pair n (Nat.pair 0 0))).unpair.2.unpair.1 = k ∧
    (bitsStep^[k] (Nat.pair n (Nat.pair 0 0))).unpair.2.unpair.2 = bitsCode n k := by
  induction k with
  | zero =>
    refine ⟨?_, ?_, ?_⟩ <;>
      simp only [Function.iterate_zero, id_eq, unpair_pair_fst, unpair_pair_snd,
    bitsCode]
```

```
  | succ k ih =>
    obtain ⟨hn, hN, hacc⟩ := ih
    rw [Function.iterate_succ_apply']
    set s := bitsStep^[k] (Nat.pair n (Nat.pair 0 0))
    refine ⟨?_, ?_, ?_⟩
    · rw [bitsStep_unpair11, hn]
    · rw [bitsStep_unpair21, hN]
    · rw [bitsStep_unpair22, hn, hN, hacc]; rfl

theorem primrec_bitsCode : Nat.Primrec (fun t => bitsCode t.unpair.1 t.unpair.2) := by
  have hbase : Nat.Primrec (fun z : ℕ => Nat.pair z.unpair.1 (Nat.pair 0 0)) :=
    Nat.Primrec.left.pair ((Nat.Primrec.const 0).pair (Nat.Primrec.const 0))
  have hstep : Nat.Primrec (fun w : ℕ => bitsStep w.unpair.2.unpair.2) :=
    primrec_bitsStep.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hprec := Nat.Primrec.prec hbase hstep
  refine ((Nat.Primrec.right.comp Nat.Primrec.right).comp
    (hprec.comp (primrec_id.pair Nat.Primrec.right))).of_eq fun t => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]
  rw [rec_const_iterate]
  exact (bitsStep_iter_spec t.unpair.1 t.unpair.2).2.2

theorem isComputableElement_of_elemSet_re {x : PN.Element} (hA : REPred (fun k => k ∈
    elemSet x)) :
    ComputableElement PNpres x := by
  have hforall : REPred (fun c => ∀ e ∈ decodeList c, e ∈ elemSet x) := hA.
    forall_mem_decodeList
  have hcode : Nat.Primrec (fun n : ℕ => bitsCode n n) :=
    (primrec_bitsCode.comp (primrec_id.pair primrec_id)).of_eq fun n => by
      simp only [unpair_pair_fst, unpair_pair_snd, id_eq]
  constructor
  refine REPred.of_iff (fun n => ?_) (hforall.comp hcode)
  show x.mem (nbhd n) ↔ _
  rw [nbhd_mem_iff_subset_elemSet, compl_nbhd]
  constructor
  · intro hsub e he
    exact hsub ((mem_decodeList_bitsCode n n e).mp he).2
  · intro hall k hk
    exact hall k ((mem_decodeList_bitsCode n n k).mpr ⟨lt_of_testBit_true hk, hk⟩)

theorem isComputableElement_iff_elemSet_re (x : PN.Element) :
    ComputableElement PNpres x ↔ REPred (fun k => k ∈ elemSet x) :=
  ⟨elemSet_re_of_isComputableElement, isComputableElement_of_elemSet_re⟩

theorem unnum_snd_lt_of_fst_succ {c k : ℕ} (h : (unnum c).1 = k + 1) : (unnum c).2 < c
    := by
  have heq : num (k + 1) (unnum c).2 = c := by
    have h' := numP_unnum c
    simpa [numP, h] using h'
  have hb := num_succ_left_gt k (unnum c).2
  omega
end

section

theorem bitAt_swap_isComputable : RecDecidable₂ (fun i m => bitAt m i = 1) :=
  ⟨fun t => bitAt t.unpair.2 t.unpair.1,
```

```
    (primrec_bitAt.comp (Nat.Primrec.right.pair Nat.Primrec.left)).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd],
    fun _ => Iff.rfl⟩
end

section

theorem capMap_rel_iff (n m k : ℕ) :
    capMap.rel (prodNbhd (nbhd n) (nbhd m)) (nbhd k) ↔ nbhd n ⊆ nbhd k ∧ nbhd m ⊆
    nbhd k := by
  constructor
  · rintro ⟨X, Y, heq, _, _, _, hXZ, hYZ⟩
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    exact ⟨hXZ, hYZ⟩
  · rintro ⟨hXZ, hYZ⟩
    exact ⟨nbhd n, nbhd m, rfl, ⟨n, rfl⟩, ⟨m, rfl⟩, ⟨k, rfl⟩, hXZ, hYZ⟩
end

section

theorem capMap_isComputable :
    ComputableMap (prodPresentation PNpres PNpres) PNpres capMap := by
  constructor
  have hincl : RecDecidable (fun s => nbhd s.unpair.1 ⊆ nbhd s.unpair.2) := PNpres.
    incl_computable
  have hr0 : Nat.Primrec (fun t => Nat.pair t.unpair.1.unpair.1 t.unpair.2) :=
    (Nat.Primrec.left.comp Nat.Primrec.left).pair Nat.Primrec.right
  have hr1 : Nat.Primrec (fun t => Nat.pair t.unpair.1.unpair.2 t.unpair.2) :=
    (Nat.Primrec.right.comp Nat.Primrec.left).pair Nat.Primrec.right
  refine (RecDecidable.of_iff (fun t => ?_) ((hincl.comp hr0).and (hincl.comp hr1))).
    re
  simp only [prodPresentation_X, unpair_pair_fst, unpair_pair_snd]
  exact capMap_rel_iff t.unpair.1.unpair.1 t.unpair.1.unpair.2 t.unpair.2
end

section

theorem cupMap_rel_iff (n m k : ℕ) :
    cupMap.rel (prodNbhd (nbhd n) (nbhd m)) (nbhd k) ↔ nbhd (myLor n m) ⊆ nbhd k :=
    by
  rw [← nbhd_inter n m]
  constructor
  · rintro ⟨X, Y, heq, _, _, _, hXYZ⟩
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    exact hXYZ
  · intro h
    exact ⟨nbhd n, nbhd m, rfl, ⟨n, rfl⟩, ⟨m, rfl⟩, ⟨k, rfl⟩, h⟩
end

section

theorem cupMap_isComputable :
    ComputableMap (prodPresentation PNpres PNpres) PNpres cupMap := by
  constructor
  have hincl : RecDecidable (fun s => nbhd s.unpair.1 ⊆ nbhd s.unpair.2) := PNpres.
    incl_computable
```

```
  have hlor : Nat.Primrec (fun t : ℕ => myLor t.unpair.1.unpair.1 t.unpair.1.unpair.2)
     :=
    (primrec_myLor.comp ((Nat.Primrec.left.comp Nat.Primrec.left).pair
      (Nat.Primrec.right.comp Nat.Primrec.left))).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hr : Nat.Primrec (fun t => Nat.pair (myLor t.unpair.1.unpair.1 t.unpair.1.
    unpair.2)
      t.unpair.2) := hlor.pair Nat.Primrec.right
  refine (RecDecidable.of_iff (fun t => ?_) (hincl.comp hr)).re
  simp only [prodPresentation_X, unpair_pair_fst, unpair_pair_snd]
  exact cupMap_rel_iff t.unpair.1.unpair.1 t.unpair.1.unpair.2 t.unpair.2
end

section

theorem decodeList_injective {a b : ℕ} (h : decodeList a = decodeList b) : a = b := by
  have := congrArg encodeList h
  rwa [encodeList_decodeList, encodeList_decodeList] at this
end

section

theorem forall_rel_iff_subset_step {W : Set (ApproximableMap PN PN)} {n m₀ : ℕ} :
    (∀ f ∈ W, f.rel (nbhd n) (nbhd m₀)) ↔ W ⊆ step (nbhd n) (nbhd m₀) := by
  constructor
  · intro h f hf; exact mem_step.mpr (h f hf)
  · intro h f hf; exact mem_step.mp (h hf)
end

section

theorem gMap_rel_iff (n m k : ℕ) :
    gMap.rel (prodNbhd (nbhd n) (nbhd m)) (nbhd k) ↔ (nbhd k)? ⊆ Fun (nbhd n)? (nbhd
    m)? := by
  constructor
  · rintro ⟨X, Y, heq, _, _, _, hsub⟩
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    exact hsub
  · intro h
    exact ⟨nbhd n, nbhd m, rfl, ⟨n, rfl⟩, ⟨m, rfl⟩, ⟨k, rfl⟩, h⟩
end

section

theorem graphMap_rel_iff (gN : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf PNpres PNpres (decodeList c))
      : Set (ApproximableMap PN PN)).Nonempty) (c m : ℕ) :
    graphMap.rel (Xenum PNpres PNpres gN c) (nbhd m) ↔
      (nbhd m)? ⊆ GraphIdx (Xenum PNpres PNpres gN c) := by
  constructor
  · rintro ⟨_, _, hsub⟩; exact hsub
  · intro h; exact ⟨Xenum_mem PNpres PNpres gN hgN c, ⟨m, rfl⟩, h⟩
end

section
```

```
theorem mem_bitsCodeList {n k : ℕ} : k ∈ decodeList (bitsCode n n) ↔ n.testBit k =
    true := by
  rw [mem_decodeList_bitsCode]
  exact ⟨fun h => h.2, fun h => ⟨lt_of_testBit_true h, h⟩⟩
end

section

theorem mem_compl_nbhd {n x : ℕ} : x ∈ (nbhd n)? ↔ n.testBit x = true := by
  rw [compl_nbhd]; rfl
end

section

theorem compl_nbhd_subset_Fun_iff (n m k : ℕ) : (nbhd k)? ⊆ Fun (nbhd n)? (nbhd m)? ↔
    ∀ j, j < k → (k.testBit j = true → j ∈ Fun (nbhd n)? (nbhd m)?) := by
  constructor
  · intro h j _ hj
    exact h (mem_compl_nbhd.mpr hj)
  · intro h j hj
    rw [mem_compl_nbhd] at hj
    exact h j (lt_of_testBit_true hj) hj
end

section

theorem compl_nbhd_subset_iff (S : Set ℕ) (k : ℕ) : (nbhd k)? ⊆ S ↔
    ∀ j, j < k → (k.testBit j = true → j ∈ S) := by
  constructor
  · intro h j _ hj
    exact h (mem_compl_nbhd.mpr hj)
  · intro h j hj
    rw [mem_compl_nbhd] at hj
    exact h j (lt_of_testBit_true hj) hj
end

section
theorem mem_sumSet {X Y : Set ℕ} {k : ℕ} : k ∈ X +ˢ Y ↔ ∃ a ∈ X, ∃ b ∈ Y, a + b = k
    := Iff.rfl
end

section

theorem nbhd_subset_iff_compl_subset_compl (a b : ℕ) :
    nbhd a ⊆ nbhd b ↔ (nbhd b)? ⊆ (nbhd a)? := by
  constructor
  · exact compl_subset_compl_of_subset
  · intro h x hxa
    rw [mem_nbhd] at hxa ⊢
    cases hbit : b.testBit x with
    | false => rfl
    | true => exact absurd (mem_compl_nbhd.mp (h (mem_compl_nbhd.mpr hbit))) (by rw [
    hxa]; decide)
end

section
```

```
theorem nbhd_subset_iff_myLor_eq (n k : ℕ) : nbhd n ⊆ nbhd k ↔ myLor n k = n := by
  constructor
  · intro h
    apply nbhd_injective
    rw [← nbhd_inter]
    exact (Set.inter_eq_left.mpr h)
  · intro h
    rw [← h, ← nbhd_inter]
    exact Set.inter_subset_right
end

section
theorem nextCellStep_eq (n m : ℕ) :
    nextCellStep (Nat.pair n m) = Nat.pair (nextCell (n, m)).1 (nextCell (n, m)).2 :=
    by
  unfold nextCellStep
  simp only [unpair_pair_fst, unpair_pair_snd]
  rcases n with _ | k
  · have hz : isZero 0 = 1 := by unfold isZero; omega
    rw [hz, selectFn_one]; rfl
  · have hz : isZero (k + 1) = 0 := by unfold isZero; omega
    rw [hz, selectFn_zero]; rfl
end

section
theorem plusStep_unpair11 (s : ℕ) : (plusStep s).unpair.1.unpair.1 = s.unpair.1.unpair
    .1 := by
  unfold plusStep; rw [unpair_pair_fst, unpair_pair_fst]
end

section
theorem plusStep_unpair12 (s : ℕ) : (plusStep s).unpair.1.unpair.2 = s.unpair.1.unpair
    .2 := by
  unfold plusStep; rw [unpair_pair_fst, unpair_pair_snd]
end

section
theorem plusStep_unpair21 (s : ℕ) : (plusStep s).unpair.2.unpair.1 = s.unpair.2.unpair
    .1 + 1 := by
  unfold plusStep; rw [unpair_pair_snd, unpair_pair_fst]
end

section
theorem plusStep_unpair22 (s : ℕ) : (plusStep s).unpair.2.unpair.2 =
    myLor s.unpair.2.unpair.2 (selectFn (bitAt s.unpair.1.unpair.1 s.unpair.2.unpair
    .1)
      (s.unpair.1.unpair.2 <<< s.unpair.2.unpair.1) 0) := by
  unfold plusStep; rw [unpair_pair_snd, unpair_pair_snd]
end

section
theorem plusStep_iter_spec (n m : ℕ) (k : ℕ) :
    (plusStep^[k] (Nat.pair (Nat.pair n m) (Nat.pair 0 0))).unpair.1.unpair.1 = n ∧
    (plusStep^[k] (Nat.pair (Nat.pair n m) (Nat.pair 0 0))).unpair.1.unpair.2 = m ∧
    (plusStep^[k] (Nat.pair (Nat.pair n m) (Nat.pair 0 0))).unpair.2.unpair.1 = k ∧
```

```
    (plusStep^[k] (Nat.pair (Nat.pair n m) (Nat.pair 0 0))).unpair.2.unpair.2 = orUpTo
     n m k := by
  induction k with
  | zero =>
    refine ⟨?_, ?_, ?_, ?_⟩ <;>
      simp only [Function.iterate_zero, id_eq, unpair_pair_fst, unpair_pair_snd,
    orUpTo]
  | succ k ih =>
    obtain ⟨hn, hm, ha, hacc⟩ := ih
    rw [Function.iterate_succ_apply']
    set s := plusStep^[k] (Nat.pair (Nat.pair n m) (Nat.pair 0 0))
    refine ⟨?_, ?_, ?_, ?_⟩
    · rw [plusStep_unpair11, hn]
    · rw [plusStep_unpair12, hm]
    · rw [plusStep_unpair21, ha]
    · rw [plusStep_unpair22, hn, hm, ha, hacc]; rfl
end

section
theorem primrec_nextCellStep : Nat.Primrec nextCellStep := by
  have hn : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hm : Nat.Primrec (fun w : ℕ => w.unpair.2) := Nat.Primrec.right
  have hz : Nat.Primrec (fun w : ℕ => isZero w.unpair.1) := primrec_isZero.comp hn
  have ha : Nat.Primrec (fun w : ℕ => Nat.pair (w.unpair.2 + 1) 0) :=
    (primrec_add₂ hm (Nat.Primrec.const 1)).pair (Nat.Primrec.const 0)
  have hb : Nat.Primrec (fun w : ℕ => Nat.pair (w.unpair.1 - 1) (w.unpair.2 + 1)) :=
    (primrec_sub₂ hn (Nat.Primrec.const 1)).pair (primrec_add₂ hm (Nat.Primrec.const 1)
    )
  exact (primrec_selectFn hz ha hb).of_eq fun _ => rfl
end

section
theorem primrec_plusStep : Nat.Primrec plusStep := by
  have hn : Nat.Primrec (fun s : ℕ => s.unpair.1.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.left
  have hm : Nat.Primrec (fun s : ℕ => s.unpair.1.unpair.2) := Nat.Primrec.right.comp
    Nat.Primrec.left
  have ha : Nat.Primrec (fun s : ℕ => s.unpair.2.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.right
  have hacc : Nat.Primrec (fun s : ℕ => s.unpair.2.unpair.2) := Nat.Primrec.right.comp
     Nat.Primrec.right
  have hbit : Nat.Primrec (fun s : ℕ => bitAt s.unpair.1.unpair.1 s.unpair.2.unpair.1)
     :=
    (primrec_bitAt.comp (hn.pair ha)).of_eq fun s => by simp only [unpair_pair_fst,
    unpair_pair_snd]
  have hshift : Nat.Primrec (fun s : ℕ => s.unpair.1.unpair.2 <<< s.unpair.2.unpair.1)
     := by
    have := primrec_mul₂ hm (primrec_two_pow ha)
    exact this.of_eq fun s => by rw [Nat.shiftLeft_eq]
  have hsel := primrec_selectFn hbit hshift (Nat.Primrec.const 0)
  have hlor : Nat.Primrec (fun s : ℕ => myLor s.unpair.2.unpair.2
      (selectFn (bitAt s.unpair.1.unpair.1 s.unpair.2.unpair.1)
        (s.unpair.1.unpair.2 <<< s.unpair.2.unpair.1) 0)) :=
    (primrec_myLor.comp (hacc.pair hsel)).of_eq fun s => by

      simp only [unpair_pair_fst, unpair_pair_snd]
```

```
  exact ((hn.pair hm).pair ((primrec_add₂ ha (Nat.Primrec.const 1)).pair hlor)).of_eq
    fun _ => rfl
end

section
theorem primrec_plusIdx : Nat.Primrec (fun t => plusIdx t.unpair.1 t.unpair.2) := by
  have hbase : Nat.Primrec
      (fun z => Nat.pair (Nat.pair z.unpair.1 z.unpair.2) (Nat.pair 0 0)) :=
    (Nat.Primrec.left.pair Nat.Primrec.right).pair
      ((Nat.Primrec.const 0).pair (Nat.Primrec.const 0))
  have hstep : Nat.Primrec (fun w => plusStep w.unpair.2.unpair.2) :=
    primrec_plusStep.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hprec := Nat.Primrec.prec hbase hstep
  refine ((Nat.Primrec.right.comp Nat.Primrec.right).comp
    (hprec.comp (primrec_id.pair Nat.Primrec.left))).of_eq fun t => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]
  rw [rec_const_iterate]
  exact (plusStep_iter_spec t.unpair.1 t.unpair.2 t.unpair.1).2.2.2
end

section

theorem primrec_tri : Nat.Primrec tri :=
  (primrec_div2.comp (primrec_mul₂ primrec_id Nat.Primrec.succ)).of_eq fun _ => rfl
end

section

theorem primrec_num : Nat.Primrec (fun t => num t.unpair.1 t.unpair.2) :=
  (primrec_add₂ (primrec_tri.comp (primrec_add₂ Nat.Primrec.left Nat.Primrec.right))
    Nat.Primrec.right).of_eq fun _ => rfl
end

section
theorem primrec_tagStep : Nat.Primrec tagStep := by
  have h1 : Nat.Primrec (fun w : ℕ => w.unpair.1 + 1) :=
    primrec_add₂ Nat.Primrec.left (Nat.Primrec.const 1)
  have h2 : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  exact (primrec_num.comp (h1.pair h2)).of_eq fun w => by
    simp only [unpair_pair_fst, unpair_pair_snd]
    rfl
end

section
theorem primrec_tagCode : Nat.Primrec (fun t => tagCode t.unpair.1 t.unpair.2) := by
  have hz : Nat.Primrec (fun t : ℕ => num 0 t.unpair.2) :=
    (primrec_num.comp ((Nat.Primrec.const 0).pair Nat.Primrec.right)).of_eq fun t =>
    by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hc : Nat.Primrec (fun t : ℕ => appendCode 0 t.unpair.1) :=
    (primrec_appendCode.comp ((Nat.Primrec.const 0).pair Nat.Primrec.left)).of_eq fun
    t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  exact (primrec_foldCode primrec_tagStep (Nat.Primrec.const 0) hz hc).of_eq fun _ =>
    rfl
```

```
end

section
theorem primrec_tagOfBits : Nat.Primrec (fun t => tagOfBits t.unpair.1 t.unpair.2) :=
    by
  have hj : Nat.Primrec (fun t : ℕ => bitsCode t.unpair.1 t.unpair.1) :=
    (primrec_bitsCode.comp (Nat.Primrec.left.pair Nat.Primrec.left)).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  exact (primrec_tagCode.comp (hj.pair Nat.Primrec.right)).of_eq fun t => by
    simp only [unpair_pair_fst, unpair_pair_snd]
    rfl
end

section
theorem primrec_unnumPair : Nat.Primrec unnumPair := by
  have hbase : Nat.Primrec (fun _ : ℕ => Nat.pair (0 : ℕ) 0) := Nat.Primrec.const (Nat
    .pair 0 0)
  have hstep : Nat.Primrec (fun w : ℕ => nextCellStep w.unpair.2.unpair.2) :=
    primrec_nextCellStep.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hprec := Nat.Primrec.prec hbase hstep
  refine (hprec.comp ((Nat.Primrec.const 0).pair primrec_id)).of_eq fun v => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]
  show Nat.rec (Nat.pair 0 0) (fun _ ih => nextCellStep ih) v = unnumPair v
  rw [rec_const_iterate]; rfl
end

section
theorem primrec_unnum1 : Nat.Primrec unnum1 := Nat.Primrec.left.comp primrec_unnumPair
end

section
theorem primrec_unnum2 : Nat.Primrec unnum2 := Nat.Primrec.right.comp
    primrec_unnumPair
end

section
theorem primrec_untagStep : Nat.Primrec untagStep := by
  have hdone : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hrevAcc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hval : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have ha : Nat.Primrec (fun w : ℕ => unnum1 w.unpair.1) := primrec_unnum1.comp Nat.
    Primrec.left
  have hb : Nat.Primrec (fun w : ℕ => unnum2 w.unpair.1) := primrec_unnum2.comp Nat.
    Primrec.left
  have hz : Nat.Primrec (fun w : ℕ => isZero (unnum1 w.unpair.1)) := primrec_isZero.
    comp ha
  have hhalt : Nat.Primrec (fun w : ℕ => Nat.pair (unnum2 w.unpair.1)
      (Nat.pair 1 (Nat.pair w.unpair.2.unpair.2.unpair.1 (unnum2 w.unpair.1)))) :=
    hb.pair ((Nat.Primrec.const 1).pair (hrevAcc.pair hb))
  have hcont : Nat.Primrec (fun w : ℕ => Nat.pair (unnum2 w.unpair.1)
      (Nat.pair 0
        (Nat.pair (Nat.pair (unnum1 w.unpair.1 - 1) w.unpair.2.unpair.2.unpair.1 + 1)
          w.unpair.2.unpair.2.unpair.2))) :=
```

```
    hb.pair ((Nat.Primrec.const 0).pair
      ((Nat.Primrec.succ.comp ((primrec_sub₂ ha (Nat.Primrec.const 1)).pair hrevAcc)).
    pair hval))
  have hinner := primrec_selectFn hz hhalt hcont
  exact (primrec_selectFn hdone primrec_id hinner).of_eq fun _ => rfl
end

section
theorem primrec_untagState : Nat.Primrec untagState := by
  have hbase : Nat.Primrec (fun c : ℕ => Nat.pair c (Nat.pair (0 : ℕ) (Nat.pair 0 0)))
     :=
    primrec_id.pair ((Nat.Primrec.const 0).pair ((Nat.Primrec.const 0).pair (Nat.
    Primrec.const 0)))
  have hstep : Nat.Primrec (fun w : ℕ => untagStep w.unpair.2.unpair.2) :=
    primrec_untagStep.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hprec := Nat.Primrec.prec hbase hstep
  refine (hprec.comp (primrec_id.pair Nat.Primrec.succ)).of_eq fun c => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]
  rw [rec_const_iterate]
  unfold untagState
  rw [Function.iterate_succ_apply']
end

section
theorem primrec_untagList : Nat.Primrec untagList :=
  primrec_appendCode.comp
    ((Nat.Primrec.const 0).pair
      (Nat.Primrec.left.comp (Nat.Primrec.right.comp (Nat.Primrec.right.comp
    primrec_untagState))))
    |>.of_eq fun c => by unfold untagList; simp only [unpair_pair_fst, unpair_pair_snd
    ]
end

section
theorem primrec_untagVal : Nat.Primrec untagVal :=
  Nat.Primrec.right.comp (Nat.Primrec.right.comp (Nat.Primrec.right.comp
    primrec_untagState))
end

section

theorem tag_eq_foldr (ns : List ℕ) (m : ℕ) :
    tag ns m = ns.foldr (fun x y => num (x + 1) y) (num 0 m) := by
  induction ns with
  | nil => rfl
  | cons a ns ih => rw [tag_cons, ih]; rfl
end

section
theorem tag_eq_foldl_reverse (ns : List ℕ) (m : ℕ) :
    tag ns m = ns.reverse.foldl (fun acc a => num (a + 1) acc) (num 0 m) := by
  rw [List.foldl_reverse]; exact tag_eq_foldr ns m
end

section
theorem tagCode_spec (code m : ℕ) : tagCode code m = tag (decodeList code) m := by
```

```
  unfold tagCode
  rw [foldCode_eq']
  have hstep : (fun acc x => tagStep (Nat.pair x (Nat.pair acc 0)))
      = (fun acc x => num (x + 1) acc) := by
    funext acc x
    show tagStep (Nat.pair x (Nat.pair acc 0)) = num (x + 1) acc
    unfold tagStep
    simp only [unpair_pair_fst, unpair_pair_snd]
  rw [hstep, decodeList_appendCode, decodeList_zero, List.append_nil]
  exact (tag_eq_foldl_reverse (decodeList code) m).symm
end

section
theorem tagOfBits_spec (j m : ℕ) : tagOfBits j m = tag (decodeList (bitsCode j j)) m
    :=
  tagCode_spec (bitsCode j j) m
end

section

theorem testBit_orUpTo (n m : ℕ) : ∀ N k,
    (orUpTo n m N).testBit k = true ↔ ∃ a, a < N ∧ n.testBit a = true ∧ a ≤ k ∧ m.
    testBit (k - a) = true
  | 0, k => by simp [orUpTo]
  | N + 1, k => by
    show (myLor (orUpTo n m N) (selectFn (bitAt n N) (m <<< N) 0)).testBit k = true ↔
    _
    rw [myLor_eq_lor, Nat.testBit_lor, Bool.or_eq_true, testBit_orUpTo n m N]
    by_cases hbit : n.testBit N = true
    · rw [(bitAt_eq_one_iff n N).mpr hbit, selectFn_one, Nat.testBit_shiftLeft]
      constructor
      · rintro (⟨a, haN, ha, hak, hb⟩ | h)
        · exact ⟨a, Nat.lt_succ_of_lt haN, ha, hak, hb⟩
        · rw [Bool.and_eq_true, decide_eq_true_iff] at h
          exact ⟨N, Nat.lt_succ_self N, hbit, h.1, h.2⟩
      · rintro ⟨a, haN1, ha, hak, hb⟩
        rcases (show a < N ∨ a = N by omega) with haN | haN
        · exact Or.inl ⟨a, haN, ha, hak, hb⟩
        · subst haN
          exact Or.inr (by rw [Bool.and_eq_true, decide_eq_true_iff]; exact ⟨hak, hb⟩)
    · have hne1 : bitAt n N = 1 := fun h => hbit ((bitAt_eq_one_iff n N).mp h)
      have hle := bitAt_le_one n N
      have hnbit : bitAt n N = 0 := by omega
      rw [hnbit, selectFn_zero]
      simp only [Nat.zero_testBit, Bool.false_eq_true, or_false]
      constructor
      · rintro ⟨a, haN, ha, hak, hb⟩; exact ⟨a, Nat.lt_succ_of_lt haN, ha, hak, hb⟩
      · rintro ⟨a, haN1, ha, hak, hb⟩
        rcases (show a < N ∨ a = N by omega) with haN | haN
        · exact ⟨a, haN, ha, hak, hb⟩
        · subst haN; exact absurd ha hbit
end

section

theorem testBit_orUpTo_self (n m k : ℕ) :
```

```
    (orUpTo n m n).testBit k = true ↔ ∃ a, a ≤ k ∧ n.testBit a = true ∧ m.testBit (k
    - a) = true := by
  rw [testBit_orUpTo]
  constructor
  · rintro ⟨a, _, ha, hak, hb⟩; exact ⟨a, hak, ha, hb⟩
  · rintro ⟨a, hak, ha, hb⟩; exact ⟨a, lt_of_testBit_true ha, ha, hak, hb⟩
end

section
theorem plusIdx_testBit (n m k : ℕ) :
    (plusIdx n m).testBit k = true ↔ ∃ a, a ≤ k ∧ n.testBit a = true ∧ m.testBit (k -
     a) = true :=
  testBit_orUpTo_self n m k
end

section

theorem compl_nbhd_plusIdx (n m : ℕ) : (nbhd (plusIdx n m))? = (nbhd n)? +ˢ (nbhd m)?
    := by
  rw [compl_nbhd, compl_nbhd, compl_nbhd]
  ext k
  simp only [mem_sumSet, Set.mem_ofPred_eq, plusIdx_testBit]
  constructor
  · rintro ⟨a, hak, ha, hb⟩; exact ⟨a, ha, k - a, hb, by omega⟩
  · rintro ⟨a, ha, b, hb, rfl⟩
    exact ⟨a, by omega, ha, by rw [Nat.add_sub_cancel_left]; exact hb⟩
end

section

theorem plusMap_rel_iff (n m k : ℕ) :
    plusMap.rel (prodNbhd (nbhd n) (nbhd m)) (nbhd k) ↔ nbhd (plusIdx n m) ⊆ nbhd k
    := by
  rw [nbhd_subset_iff_compl_subset_compl, compl_nbhd_plusIdx]
  constructor
  · rintro ⟨X, Y, heq, _, _, _, hsub⟩
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    exact hsub
  · intro h
    exact ⟨nbhd n, nbhd m, rfl, ⟨n, rfl⟩, ⟨m, rfl⟩, ⟨k, rfl⟩, h⟩
end

section

theorem plusMap_isComputable :
    ComputableMap (prodPresentation PNpres PNpres) PNpres plusMap := by
  constructor
  have hincl : RecDecidable (fun s => nbhd s.unpair.1 ⊆ nbhd s.unpair.2) := PNpres.
    incl_computable
  have hpair : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.1.unpair.1 t.unpair.1.
    unpair.2) :=
    (Nat.Primrec.left.comp Nat.Primrec.left).pair (Nat.Primrec.right.comp Nat.Primrec.
    left)
  have hplus : Nat.Primrec (fun t : ℕ => plusIdx t.unpair.1.unpair.1 t.unpair.1.unpair
    .2) :=
    (primrec_plusIdx.comp hpair).of_eq fun t => by
```

```
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hr : Nat.Primrec (fun t => Nat.pair (plusIdx t.unpair.1.unpair.1 t.unpair.1.
    unpair.2)
      t.unpair.2) := hplus.pair Nat.Primrec.right
  refine (RecDecidable.of_iff (fun t => ?_) (hincl.comp hr)).re
  simp only [prodPresentation_X, unpair_pair_fst, unpair_pair_snd]
  exact plusMap_rel_iff t.unpair.1.unpair.1 t.unpair.1.unpair.2 t.unpair.2
end

section
theorem unnumPair_spec (v : ℕ) : unnumPair v = Nat.pair (unnum v).1 (unnum v).2 := by
  unfold unnumPair
  induction v with
  | zero => rfl
  | succ v ih => rw [Function.iterate_succ_apply', ih, nextCellStep_eq]; rfl
end

section
theorem unnum1_spec (v : ℕ) : unnum1 v = (unnum v).1 := by
  unfold unnum1; rw [unnumPair_spec, unpair_pair_fst]
end

section
theorem unnum2_spec (v : ℕ) : unnum2 v = (unnum v).2 := by
  unfold unnum2; rw [unnumPair_spec, unpair_pair_snd]
end

section

theorem untagList_bitAt_isComputable :
    RecDecidable (fun w : ℕ => ∀ i ∈ decodeList (untagList w.unpair.1), bitAt w.unpair
    .2.unpair.2 i = 1) :=
  RecDecidable.of_iff (fun w => by simp only [unpair_pair_fst, unpair_pair_snd])
    (bitAt_swap_isComputable.bForallList.comp
      ((primrec_untagList.comp Nat.Primrec.left).pair (Nat.Primrec.right.comp Nat.
    Primrec.right)))
end

section
theorem untagRef_succ_case {c k : ℕ} (h : (unnum c).1 = k + 1) :
    untagRef c = (k :: (untagRef (unnum c).2).1, (untagRef (unnum c).2).2) := by
  have h0 : ¬ (unnum c).1 = 0 := by omega
  rw [untagRef, dite_eq_right h0, h]
  have hsub : k + 1 - 1 = k := by omega
  rw [hsub]
end

section
theorem untagRef_zero_case {c : ℕ} (h : (unnum c).1 = 0) :
    untagRef c = ([], (unnum c).2) := by
  rw [untagRef]; simp [h]
end

section

theorem tag_untagRef (c : ℕ) : tag (untagRef c).1 (untagRef c).2 = c := by
```

```
  induction c using Nat.strong_induction_on with
  | _ c ih =>
    rcases hc : (unnum c).1 with a | k
    · rw [untagRef_zero_case hc]
      have heq := numP_unnum c
      simp only [numP, hc] at heq
      rw [tag_nil]
      exact heq
    · rw [untagRef_succ_case hc]
      have heq : num (k + 1) (unnum c).2 = c := by
        have h := numP_unnum c
        simpa [numP, hc] using h
      have hlt : (unnum c).2 < c := by
        have hb := num_succ_left_gt k (unnum c).2
        omega
      rw [tag_cons, ih (unnum c).2 hlt, heq]
end

section
theorem untagStep_cont {w : ℕ} (hdone : w.unpair.2.unpair.1 = 0) {k : ℕ}
    (ha : unnum1 w.unpair.1 = k + 1) :
    untagStep w = Nat.pair (unnum2 w.unpair.1)
      (Nat.pair 0
        (Nat.pair (Nat.pair k w.unpair.2.unpair.2.unpair.1 + 1) w.unpair.2.unpair.2.
    unpair.2)) := by
  unfold untagStep
  rw [hdone, selectFn_zero, ha]
  have hz : isZero (k + 1) = 0 := by unfold isZero; omega
  have hsub : k + 1 - 1 = k := by omega
  rw [hz, selectFn_zero, hsub]
end

section
theorem untagStep_done {w : ℕ} (h : w.unpair.2.unpair.1 = 1) : untagStep w = w := by
  unfold untagStep; rw [h, selectFn_one]
end

section
theorem untagStep_halt {w : ℕ} (hdone : w.unpair.2.unpair.1 = 0) (ha : unnum1 w.unpair
    .1 = 0) :
    untagStep w = Nat.pair (unnum2 w.unpair.1)
      (Nat.pair 1 (Nat.pair w.unpair.2.unpair.2.unpair.1 (unnum2 w.unpair.1))) := by
  unfold untagStep
  rw [hdone, selectFn_zero, ha]
  have : isZero 0 = 1 := by unfold isZero; omega
  rw [this, selectFn_one]
end

section
theorem untagStep_of_done_iterate (w : ℕ) (h : w.unpair.2.unpair.1 = 1) :
    ∀ k, untagStep^[k] w = w
  | 0 => rfl
  | k + 1 => by rw [Function.iterate_succ_apply', untagStep_of_done_iterate w h k,
    untagStep_done h]
end
```

```
section

theorem untagStep_iter_spec : ∀ c, ∀ fuel r v : ℕ, c ≤ fuel →
    untagStep^[fuel + 1] (Nat.pair c (Nat.pair 0 (Nat.pair r v))) =
      Nat.pair (untagRef c).2 (Nat.pair 1
        (Nat.pair ((untagRef c).1.foldl (fun acc x => Nat.pair x acc + 1) r) (untagRef
     c).2)) := by
  intro c
  induction c using Nat.strong_induction_on with
  | _ c ih =>
    intro fuel r v hfuel
    set w : ℕ := Nat.pair c (Nat.pair 0 (Nat.pair r v)) with hw
    have hw1 : w.unpair.1 = c := by rw [hw, unpair_pair_fst]
    have hw2 : w.unpair.2.unpair.1 = 0 := by rw [hw]; simp only [unpair_pair_snd,
    unpair_pair_fst]
    have hw3 : w.unpair.2.unpair.2.unpair.1 = r := by
      rw [hw]; simp only [unpair_pair_snd, unpair_pair_fst]
    have hw4 : w.unpair.2.unpair.2.unpair.2 = v := by
      rw [hw]; simp only [unpair_pair_snd]
    rw [Function.iterate_succ_apply]
    rcases hc : (unnum c).1 with _ | k
    · have ha0 : unnum1 w.unpair.1 = 0 := by rw [hw1, unnum1_spec, hc]
      have hstep : untagStep w = Nat.pair (unnum c).2 (Nat.pair 1 (Nat.pair r (unnum c
    ).2)) := by
        rw [untagStep_halt hw2 ha0, hw1, hw3, unnum2_spec]
      rw [hstep]
      have hdone1 : (Nat.pair (unnum c).2
          (Nat.pair 1 (Nat.pair r (unnum c).2))).unpair.2.unpair.1 = 1 := by
        simp only [unpair_pair_snd, unpair_pair_fst]
      rw [untagStep_of_done_iterate _ hdone1, untagRef_zero_case hc, List.foldl_nil]
    · have hak : unnum1 w.unpair.1 = k + 1 := by rw [hw1, unnum1_spec, hc]
      set b : ℕ := (unnum c).2 with hbdef
      have hblt : b < c := unnum_snd_lt_of_fst_succ hc
      have hc1 : 1 ≤ c := by omega
      have hstep : untagStep w = Nat.pair b (Nat.pair 0 (Nat.pair (Nat.pair k r + 1) v
    )) := by
        rw [untagStep_cont hw2 hak, hw1, hw3, hw4, unnum2_spec]
      rw [hstep]
      rcases fuel with _ | fuel'
      · omega
      · have hble : b ≤ fuel' := by omega
        have hihb := ih b hblt fuel' (Nat.pair k r + 1) v hble
        rw [hihb]
        have href := untagRef_succ_case (c := c) (k := k) hc

        rw [← hbdef] at href
        rw [href, List.foldl_cons]
end

section
theorem untagState_spec (c : ℕ) :
    untagState c = Nat.pair (untagRef c).2
      (Nat.pair 1 (Nat.pair ((untagRef c).1.foldl (fun acc x => Nat.pair x acc + 1) 0)
        (untagRef c).2)) :=
  untagStep_iter_spec c c 0 0 (le_refl c)
end
```

```
section

theorem decodeList_untagList (c : ℕ) : decodeList (untagList c) = (untagRef c).1 := by
  unfold untagList
  rw [decodeList_appendCode, decodeList_zero, List.append_nil]
  have hspec := untagState_spec c
  have hrevAcc : (untagState c).unpair.2.unpair.2.unpair.1
      = (untagRef c).1.foldl (fun acc x => Nat.pair x acc + 1) 0 := by
    rw [hspec]; simp only [unpair_pair_snd, unpair_pair_fst]
  rw [hrevAcc]
  have hfold : ∀ l : List ℕ, ∀ r : ℕ,
      decodeList (l.foldl (fun acc x => Nat.pair x acc + 1) r) = l.reverse ++
    decodeList r := by
    intro l
    induction l with
    | nil => intro r; simp
    | cons a l ih =>
      intro r
      rw [List.foldl_cons, ih, decodeList_succ, unpair_pair_fst, unpair_pair_snd,
        List.reverse_cons, List.append_assoc, List.singleton_append]
  rw [hfold (untagRef c).1 0, decodeList_zero, List.append_nil, List.reverse_reverse]
end

section

theorem untagVal_and_isComputable :
    RecDecidable (fun w : ℕ => untagVal w.unpair.1 = w.unpair.2.unpair.1 ∧
      ∀ i ∈ decodeList (untagList w.unpair.1), bitAt w.unpair.2.unpair.2 i = 1) :=
  (RecDecidable.natEq (primrec_untagVal.comp Nat.Primrec.left)
    (Nat.Primrec.left.comp Nat.Primrec.right)).and untagList_bitAt_isComputable
end

section

theorem untagVal_spec (c : ℕ) : untagVal c = (untagRef c).2 := by
  unfold untagVal; rw [untagState_spec]; simp only [unpair_pair_snd]
end

section

theorem tag_untagList_untagVal (c : ℕ) : tag (decodeList (untagList c)) (untagVal c) =
    c := by
  rw [decodeList_untagList, untagVal_spec]; exact tag_untagRef c
end

section

theorem mem_Fun_compl_nbhd_iff (n m j : ℕ) :
    j ∈ Fun (nbhd n)? (nbhd m)? ↔
      ∃ c ∈ decodeList (bitsCode n n), untagVal c = j ∧
        ∀ i ∈ decodeList (untagList c), i ∈ (nbhd m)? := by
  constructor
  · rintro ⟨ns, hns, htag⟩
    have hc : tag ns j ∈ decodeList (bitsCode n n) := by
      rw [mem_bitsCodeList]; exact mem_compl_nbhd.mp htag
```

```
    refine ⟨tag ns j, hc, ?_, ?_⟩
    · exact (tag_injective (tag_untagList_untagVal (tag ns j))).2
    · rw [(tag_injective (tag_untagList_untagVal (tag ns j))).1]
      exact hns
  · rintro ⟨c, hc, hval, hall⟩
    refine ⟨decodeList (untagList c), hall, ?_⟩
    rw [mem_compl_nbhd, ← hval, tag_untagList_untagVal]
    exact mem_bitsCodeList.mp hc
end

section

theorem mem_Fun_compl_nbhd_iff' (n m j : ℕ) :
    j ∈ Fun (nbhd n)? (nbhd m)? ↔
      ∃ c, c < n ∧ n.testBit c = true ∧ untagVal c = j ∧
        ∀ i ∈ decodeList (untagList c), bitAt m i = 1 := by
  rw [mem_Fun_compl_nbhd_iff]
  simp only [mem_bitsCodeList, mem_compl_nbhd, bitAt_eq_one_iff]
  constructor
  · rintro ⟨c, hbit, hval, hall⟩
    exact ⟨c, lt_of_testBit_true hbit, hbit, hval, hall⟩
  · rintro ⟨c, -, hbit, hval, hall⟩
    exact ⟨c, hbit, hval, hall⟩
end

section

theorem mem_Fun_compl_nbhd_isComputable :
    RecDecidable (fun w : ℕ =>
      w.unpair.2.unpair.1 ∈ Fun (nbhd w.unpair.1)? (nbhd w.unpair.2.unpair.2)?) := by
  have hbitN : RecDecidable (fun w : ℕ => w.unpair.2.unpair.1.testBit w.unpair.1 =
    true) :=
    ⟨fun w => bitAt w.unpair.2.unpair.1 w.unpair.1,
      (primrec_bitAt.comp ((Nat.Primrec.left.comp Nat.Primrec.right).pair Nat.Primrec.
    left)).of_eq
        fun w => by simp only [unpair_pair_fst, unpair_pair_snd],
      fun w => (bitAt_eq_one_iff _ _).symm⟩
  have hCJ' : RecDecidable (fun w : ℕ => untagVal w.unpair.1 = w.unpair.2.unpair.2.
    unpair.1 ∧
      ∀ i ∈ decodeList (untagList w.unpair.1), bitAt w.unpair.2.unpair.2.unpair.2 i =
    1) :=
    RecDecidable.of_iff (fun w => by simp only [unpair_pair_fst, unpair_pair_snd])
      (untagVal_and_isComputable.comp (Nat.Primrec.left.pair (Nat.Primrec.right.comp
    Nat.Primrec.right)))
  have hp := hbitN.and hCJ'
  refine RecDecidable.of_iff (fun w => ?_) (hp.bExists Nat.Primrec.left)
  rw [mem_Fun_compl_nbhd_iff']
  simp only [unpair_pair_fst, unpair_pair_snd]
end

section

theorem mem_GraphIdx_iff (W : Set (ApproximableMap PN PN)) (c : ℕ) :
    c ∈ GraphIdx W ↔ ∃ n m₀, untagList c = bitsCode n n ∧
      (∀ f ∈ W, f.rel (nbhd n) (nbhd m₀)) ∧ m₀.testBit (untagVal c) = true := by
  constructor
```

```
  · rintro ⟨n, m₀, m, rfl, hf, hbit⟩
    have htag : tag (decodeList (untagList (tagOfBits n m))) (untagVal (tagOfBits n m)
    ) =
        tag (decodeList (bitsCode n n)) m :=
      (tag_untagList_untagVal (tagOfBits n m)).trans (tagOfBits_spec n m)
    obtain ⟨hlist, hval⟩ := tag_injective htag
    refine ⟨n, m₀, decodeList_injective hlist, hf, ?_⟩
    rw [hval]; exact hbit
  · rintro ⟨n, m₀, heq, hf, hbit⟩
    refine ⟨n, m₀, untagVal c, ?_, hf, hbit⟩
    rw [tagOfBits_spec, ← heq]
    exact (tag_untagList_untagVal c).symm
end

section

theorem graphIdx_isComputable (gN incl0 incl1 eq1 : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf PNpres PNpres (decodeList c))
      : Set (ApproximableMap PN PN)).Nonempty) (hgNp : Nat.Primrec gN)
    (hincl0 : ∀ s, incl0 s = 1 ↔ PNpres.X s.unpair.1 ⊆ PNpres.X s.unpair.2)
    (hincl0p : Nat.Primrec incl0)
    (hincl1 : ∀ s, incl1 s = 1 ↔ PNpres.X s.unpair.1 ⊆ PNpres.X s.unpair.2)
    (hincl1p : Nat.Primrec incl1)
    (heq1 : ∀ s, eq1 s = 1 ↔ PNpres.X s.unpair.1 = PNpres.X s.unpair.2) (heq1p : Nat.
   Primrec eq1) :
    REPred₂ (fun c j => j ∈ GraphIdx
      (Xenum PNpres PNpres gN c : Set (ApproximableMap PN PN))) := by
  have hinclP : RecDecidable₂ (fun a b =>
      (Xenum PNpres PNpres gN a : Set (ApproximableMap PN PN)) ⊆ Xenum PNpres PNpres
   gN b) :=
    (funPresentation PNpres PNpres gN incl0 incl1 eq1 hgN hgNp hincl0 hincl0p hincl1
   hincl1p heq1
     heq1p).incl_computable

  have hj : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hn : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hm0 : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hbitsCodeArg : Nat.Primrec (fun w : ℕ => bitsCode w.unpair.2.unpair.1 w.unpair
    .2.unpair.1) :=
    (primrec_bitsCode.comp (hn.pair hn)).of_eq fun w => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hpairArg : Nat.Primrec
      (fun w : ℕ => Nat.pair (Nat.pair w.unpair.2.unpair.1 w.unpair.1) 0 + 1) :=
    Nat.Primrec.succ.comp ((hn.pair hm0).pair (Nat.Primrec.const 0))
  have hA : RecDecidable (fun w : ℕ =>
      untagList w.unpair.2.unpair.2.unpair.2 =
        bitsCode w.unpair.2.unpair.1 w.unpair.2.unpair.1) :=
    RecDecidable.natEq (primrec_untagList.comp hj) hbitsCodeArg
  have hB : RecDecidable (fun w : ℕ =>
      (Xenum PNpres PNpres gN w.unpair.2.unpair.2.unpair.1 : Set (ApproximableMap PN
    PN)) ⊆
        Xenum PNpres PNpres gN (Nat.pair (Nat.pair w.unpair.2.unpair.1 w.unpair.1) 0 +
```

```
     1)) :=
    RecDecidable.of_iff (fun w => by simp only [unpair_pair_fst, unpair_pair_snd])
      (hinclP.comp (hc.pair hpairArg))
  have hC : RecDecidable (fun w : ℕ =>
      w.unpair.1.testBit (untagVal w.unpair.2.unpair.2.unpair.2) = true) :=
    ⟨fun w => bitAt w.unpair.1 (untagVal w.unpair.2.unpair.2.unpair.2),
      (primrec_bitAt.comp (hm0.pair (primrec_untagVal.comp hj))).of_eq fun w => by
        simp only [unpair_pair_fst, unpair_pair_snd],
      fun w => (bitAt_eq_one_iff _ _).symm⟩
  have hre : REPred (fun w : ℕ =>
      untagList w.unpair.2.unpair.2.unpair.2 =
        bitsCode w.unpair.2.unpair.1 w.unpair.2.unpair.1 ∧
      (Xenum PNpres PNpres gN w.unpair.2.unpair.2.unpair.1 : Set (ApproximableMap PN
    PN)) ⊆
        Xenum PNpres PNpres gN (Nat.pair (Nat.pair w.unpair.2.unpair.1 w.unpair.1) 0 +
     1) ∧
      w.unpair.1.testBit (untagVal w.unpair.2.unpair.2.unpair.2) = true) :=
    (hA.and (hB.and hC)).re
  have hp2 := hre.proj.proj
  refine REPred.of_iff (fun t => ?_) hp2
  dsimp only
  rw [mem_GraphIdx_iff]
  constructor
  · rintro ⟨n, m₀, heq, hf, hbit⟩
    refine ⟨n, m₀, ?_⟩
    show untagList (Nat.pair m₀ (Nat.pair n t)).unpair.2.unpair.2.unpair.2 =
          bitsCode (Nat.pair m₀ (Nat.pair n t)).unpair.2.unpair.1
            (Nat.pair m₀ (Nat.pair n t)).unpair.2.unpair.1 ∧
        (Xenum PNpres PNpres gN (Nat.pair m₀ (Nat.pair n t)).unpair.2.unpair.2.unpair.1
          : Set (ApproximableMap PN PN)) ⊆
          Xenum PNpres PNpres gN (Nat.pair
            (Nat.pair (Nat.pair m₀ (Nat.pair n t)).unpair.2.unpair.1
              (Nat.pair m₀ (Nat.pair n t)).unpair.1) 0 + 1) ∧
        (Nat.pair m₀ (Nat.pair n t)).unpair.1.testBit
          (untagVal (Nat.pair m₀ (Nat.pair n t)).unpair.2.unpair.2.unpair.2) = true
    simp only [unpair_pair_fst, unpair_pair_snd]
    refine ⟨heq, ?_, hbit⟩
    rw [Xenum_singleton PNpres PNpres gN hgN n m₀]
    exact forall_rel_iff_subset_step.mp hf
  · rintro ⟨n, m₀, hbase⟩
    simp only [unpair_pair_fst, unpair_pair_snd] at hbase
    obtain ⟨heq, hsub, hbit⟩ := hbase
    refine ⟨n, m₀, heq, ?_, hbit⟩
    apply forall_rel_iff_subset_step.mpr
    rwa [Xenum_singleton PNpres PNpres gN hgN n m₀] at hsub
end

section

theorem graphMap_isComputable (gN incl0 incl1 eq1 : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf PNpres PNpres (decodeList c))
      : Set (ApproximableMap PN PN)).Nonempty) (hgNp : Nat.Primrec gN)
    (hincl0 : ∀ s, incl0 s = 1 ↔ PNpres.X s.unpair.1 ⊆ PNpres.X s.unpair.2)
    (hincl0p : Nat.Primrec incl0)
    (hincl1 : ∀ s, incl1 s = 1 ↔ PNpres.X s.unpair.1 ⊆ PNpres.X s.unpair.2)
    (hincl1p : Nat.Primrec incl1)
```

```
    (heq1 : ∀ s, eq1 s = 1 ↔ PNpres.X s.unpair.1 = PNpres.X s.unpair.2) (heq1p : Nat.
    Primrec eq1) :
    ComputableMap
      (funPresentation PNpres PNpres gN incl0 incl1 eq1 hgN hgNp hincl0 hincl0p hincl1
     hincl1p
        heq1 heq1p)
      PNpres graphMap := by
  constructor
  have hidx := graphIdx_isComputable gN incl0 incl1 eq1 hgN hgNp hincl0 hincl0p hincl1
     hincl1p
    heq1 heq1p
  have hforall : REPred (fun t : ℕ => ∀ j ∈ decodeList t.unpair.2,
      j ∈ GraphIdx (Xenum PNpres PNpres gN t.unpair.1 : Set (ApproximableMap PN PN)))
    :=
    REPred.forall_mem_decodeList₂ hidx
  have hreidx : Nat.Primrec (fun s : ℕ => Nat.pair s.unpair.1 (bitsCode s.unpair.2 s.
    unpair.2)) :=
    Nat.Primrec.left.pair ((primrec_bitsCode.comp (Nat.Primrec.right.pair
      Nat.Primrec.right)).of_eq fun s => by simp only [unpair_pair_fst,
    unpair_pair_snd])
  refine REPred.of_iff (fun s => ?_) (hforall.comp hreidx)
  simp only [unpair_pair_fst, unpair_pair_snd]
  exact (graphMap_rel_iff gN hgN s.unpair.1 s.unpair.2).trans (by
    rw [compl_nbhd_subset_iff]
    exact ⟨fun h j hj => h j (lt_of_testBit_true (mem_bitsCodeList.mp hj))
        (mem_bitsCodeList.mp hj),
      fun h j hjlt hjbit => h j (mem_bitsCodeList.mpr hjbit)⟩)
end

section
set_option linter.unusedVariables false

theorem example_723 : ∀ (gN incl0 incl1 eq1 : Nat → Nat)
  (hgN :
    ∀ (c : Nat),
      Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
        (@Set.Nonempty
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap Nat Nat DomainTheory.
    NeighbourhoodSystems.Example78.PN
            DomainTheory.NeighbourhoodSystems.Example78.PN)
          (@DomainTheory.NeighbourhoodSystems.stepFun Nat Nat DomainTheory.
    NeighbourhoodSystems.Example78.PN
            DomainTheory.NeighbourhoodSystems.Example78.PN
            (@DomainTheory.NeighbourhoodSystems.funListOf Nat Nat DomainTheory.
    NeighbourhoodSystems.Example78.PN
              DomainTheory.NeighbourhoodSystems.Example78.PN DomainTheory.
    NeighbourhoodSystems.Example78.PNpres
              DomainTheory.NeighbourhoodSystems.Example78.PNpres (Domain.Recursive.
    decodeList c)))))
  (hgNp : Nat.Primrec gN)
  (hincl0 :
    ∀ (s : Nat),
      Iff (@Eq Nat (incl0 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
    )
        (@LE.le (Set Nat) (@Set.instLE Nat)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X Nat
```

```
            DomainTheory.NeighbourhoodSystems.Example78.PN DomainTheory.
    NeighbourhoodSystems.Example78.PNpres
             (@Prod.fst Nat Nat (Nat.unpair s)))
           (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X Nat
            DomainTheory.NeighbourhoodSystems.Example78.PN DomainTheory.
    NeighbourhoodSystems.Example78.PNpres
             (@Prod.snd Nat Nat (Nat.unpair s)))))
  (hincl0p : Nat.Primrec incl0)
  (hincl1 :
    ∀ (s : Nat),
      Iff (@Eq Nat (incl1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1)))
    )
        (@LE.le (Set Nat) (@Set.instLE Nat)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X Nat
            DomainTheory.NeighbourhoodSystems.Example78.PN DomainTheory.
    NeighbourhoodSystems.Example78.PNpres
             (@Prod.fst Nat Nat (Nat.unpair s)))
           (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X Nat
            DomainTheory.NeighbourhoodSystems.Example78.PN DomainTheory.
    NeighbourhoodSystems.Example78.PNpres
             (@Prod.snd Nat Nat (Nat.unpair s)))))
  (hincl1p : Nat.Primrec incl1)
  (heq1 :
    ∀ (s : Nat),
      Iff (@Eq Nat (eq1 s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
        (@Eq (Set Nat)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X Nat
            DomainTheory.NeighbourhoodSystems.Example78.PN DomainTheory.
    NeighbourhoodSystems.Example78.PNpres
             (@Prod.fst Nat Nat (Nat.unpair s)))
           (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X Nat
            DomainTheory.NeighbourhoodSystems.Example78.PN DomainTheory.
    NeighbourhoodSystems.Example78.PNpres
             (@Prod.snd Nat Nat (Nat.unpair s)))))
  (heq1p : Nat.Primrec eq1),
  @DomainTheory.NeighbourhoodSystems.ComputableMap
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap Nat Nat DomainTheory.
    NeighbourhoodSystems.Example78.PN
      DomainTheory.NeighbourhoodSystems.Example78.PN)
    Nat
    (@DomainTheory.NeighbourhoodSystems.funSpace Nat Nat DomainTheory.
    NeighbourhoodSystems.Example78.PN
      DomainTheory.NeighbourhoodSystems.Example78.PN)
    DomainTheory.NeighbourhoodSystems.Example78.PN
    (@DomainTheory.NeighbourhoodSystems.funPresentation Nat Nat DomainTheory.
    NeighbourhoodSystems.Example78.PN
      DomainTheory.NeighbourhoodSystems.Example78.PN DomainTheory.NeighbourhoodSystems
    .Example78.PNpres
      DomainTheory.NeighbourhoodSystems.Example78.PNpres gN incl0 incl1 eq1 hgN hgNp
    hincl0 hincl0p hincl1 hincl1p heq1
      heq1p)
    DomainTheory.NeighbourhoodSystems.Example78.PNpres DomainTheory.
    NeighbourhoodSystems.Exercise723.graphMap :=
  DomainTheory.NeighbourhoodSystems.Exercise723.graphMap_isComputable
end
```

```
section

theorem testBit_imp_mem_Fun_isComputable :
    RecDecidable (fun w : ℕ => w.unpair.2.unpair.2.testBit w.unpair.1 = true →
      w.unpair.1 ∈ Fun (nbhd w.unpair.2.unpair.1.unpair.1)? (nbhd w.unpair.2.unpair.1.
    unpair.2)?) := by
  have hktest : RecDecidable (fun w : ℕ => w.unpair.2.unpair.2.testBit w.unpair.1 =
    true) :=
    ⟨fun w => bitAt w.unpair.2.unpair.2 w.unpair.1,
      (primrec_bitAt.comp ((Nat.Primrec.right.comp Nat.Primrec.right).pair Nat.Primrec
    .left)).of_eq
        fun w => by simp only [unpair_pair_fst, unpair_pair_snd],
      fun w => (bitAt_eq_one_iff _ _).symm⟩
  have hmem2 : RecDecidable (fun w : ℕ =>
      w.unpair.1 ∈ Fun (nbhd w.unpair.2.unpair.1.unpair.1)? (nbhd w.unpair.2.unpair.1.
    unpair.2)?) :=
    RecDecidable.of_iff (fun w => by simp only [unpair_pair_fst, unpair_pair_snd])
      (mem_Fun_compl_nbhd_isComputable.comp
        ((Nat.Primrec.left.comp (Nat.Primrec.left.comp Nat.Primrec.right)).pair
          (Nat.Primrec.left.pair (Nat.Primrec.right.comp (Nat.Primrec.left.comp Nat.
    Primrec.right)))))
  refine RecDecidable.of_iff (fun w => ?_) (hktest.not.or hmem2)
  constructor
  · intro h
    rcases hktest.em w with hb | hb
    · exact Or.inr (h hb)
    · exact Or.inl hb
  · rintro (hb | hb) hbit
    · exact absurd hbit hb
    · exact hb
end

section

theorem gMap_isComputable :
    ComputableMap (prodPresentation PNpres PNpres) PNpres gMap := by
  constructor
  have hall : RecDecidable (fun u : ℕ => ∀ j, j < u.unpair.2 →
      u.unpair.2.testBit j = true →
        j ∈ Fun (nbhd u.unpair.1.unpair.1)? (nbhd u.unpair.1.unpair.2)?) :=
    RecDecidable.of_iff (fun u => by simp only [unpair_pair_fst, unpair_pair_snd])
      (testBit_imp_mem_Fun_isComputable.bForall Nat.Primrec.right)
  refine (RecDecidable.of_iff (fun t => ?_) hall).re
  simp only [prodPresentation_X]
  exact (gMap_rel_iff _ _ _).trans (compl_nbhd_subset_Fun_iff _ _ _)
end

section

theorem funMap_isComputable (gN incl0 incl1 eq1 : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf PNpres PNpres (decodeList c))
      : Set (ApproximableMap PN PN)).Nonempty) (hgNp : Nat.Primrec gN)
    (hincl0 : ∀ s, incl0 s = 1 ↔ PNpres.X s.unpair.1 ⊆ PNpres.X s.unpair.2)
    (hincl0p : Nat.Primrec incl0)
    (hincl1 : ∀ s, incl1 s = 1 ↔ PNpres.X s.unpair.1 ⊆ PNpres.X s.unpair.2)
    (hincl1p : Nat.Primrec incl1)
```

```
    (heq1 : ∀ s, eq1 s = 1 ↔ PNpres.X s.unpair.1 = PNpres.X s.unpair.2) (heq1p : Nat.
    Primrec eq1) :
    ComputableMap PNpres
      (funPresentation PNpres PNpres gN incl0 incl1 eq1 hgN hgNp hincl0 hincl0p hincl1
     hincl1p
        heq1 heq1p)
      funMap :=
  curry_isComputable PNpres PNpres PNpres gN incl0 incl1 eq1 hgN hgNp hincl0 hincl0p
    hincl1
    hincl1p heq1 heq1p gMap_isComputable
end

end DomainTheory.NeighbourhoodSystems.Exercise723
end
```

3.8.26 Exercise 7.24 — LUCID history domain

(Suggested by the LUCID language of Ashcroft and Wadge: SIAM Jour. Comp. vol. 5 (1976).)

Define a set Γ by

$$\Gamma = \bigcup_{i=0}^{\infty} (\{i\} \times \Gamma) \cup \{\star\}.$$

Define a system

$$L = \{\Gamma\} \cup \{\{i\} \times X \mid i \in \mathbf{N} \text{ and } X \in L\}.$$

Show that L is effectively given. Show that the elements of $|L|$ can be identified with the finite and infinite sequences of natural numbers. What is the connection between B and L?

Show that the combinators of LUCID can be construed as computable mappings of type

$$(L \to T) \to (L \to T)$$

or of type

$$(L \to T) \times (L \to T) \to (L \to T).$$

Conclude that programs in LUCID define computable maps.

Exercise_7_24.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_12
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_3
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7
```

```
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise724
open NeighborhoodSystem Domain.Recursive

section

abbrev Gamma : Type := List ℕ ? (ℕ → ℕ)
end

section

def star : Gamma := Sum.inl []
end

section

def streamCons (i : ℕ) (s : ℕ → ℕ) : ℕ → ℕ
  | 0 => i
  | n + 1 => s n
end

section
@[simp] theorem streamCons_zero (i : ℕ) (s : ℕ → ℕ) : streamCons i s 0 = i := rfl
end

section
@[simp] theorem streamCons_succ (i : ℕ) (s : ℕ → ℕ) (n : ℕ) : streamCons i s (n + 1)
    = s n := rfl
end

section

def cons (i : ℕ) : Gamma → Gamma
  | .inl l => .inl (i :: l)
  | .inr s => .inr (streamCons i s)
end

section

def consSet (i : ℕ) (X : Set Gamma) : Set Gamma := {z | ∃ ? ∈ X, z = cons i ?}
end

section

theorem cons_injective {i j : ℕ} {? ? : Gamma} (h : cons i ? = cons j ?) : i = j ∧ ? =
     ? := by
  cases ? with
  | inl l =>
    cases ? with
    | inl l' =>
      simp only [cons, Sum.inl.injEq, List.cons.injEq] at h
      exact ⟨h.1, by rw [h.2]⟩
    | inr s' => simp [cons] at h
  | inr s =>
```

```
    cases ? with
    | inl l' => simp [cons] at h
    | inr s' =>
      have heq : streamCons i s = streamCons j s' := by simpa [cons] using h
      have hi : i = j := by simpa using congrFun heq 0
      refine ⟨hi, ?_⟩
      have hs : s = s' := funext fun n => by simpa using congrFun heq (n + 1)
      rw [hs]
end

section
@[simp] theorem mem_consSet {i : ℕ} {X : Set Gamma} {z : Gamma} :
    z ∈ consSet i X ↔ ∃ ? ∈ X, z = cons i ? := Iff.rfl
end

section
@[simp] theorem consSet_empty (i : ℕ) : consSet i (∅ : Set Gamma) = ∅ := by
  ext z; simp [mem_consSet]
end

section
theorem consSet_inter (i : ℕ) (X X' : Set Gamma) :
    consSet i X ∩ consSet i X' = consSet i (X ∩ X') := by
  ext z
  simp only [Set.mem_inter_iff, mem_consSet]
  constructor
  · rintro ⟨⟨?, h?, rfl⟩, ?', h?', heq⟩
    obtain ⟨-, h??'⟩ := cons_injective heq
    exact ⟨?, ⟨h?, h??' ▸ h?'⟩, rfl⟩
  · rintro ⟨?, ⟨h?, h?'⟩, rfl⟩
    exact ⟨⟨?, h?, rfl⟩, ⟨?, h?', rfl⟩⟩
end

section
theorem consSet_inter_ne {i j : ℕ} (h : i = j) (X Y : Set Gamma) :
    consSet i X ∩ consSet j Y = ∅ := by
  ext z
  simp only [Set.mem_inter_iff, mem_consSet, Set.mem_empty_iff_false, iff_false,
    not_and]
  rintro ⟨?, -, rfl⟩ ⟨?', -, heq⟩
  exact h (cons_injective heq).1
end

section
theorem consSet_nonempty {i : ℕ} {X : Set Gamma} (h : X.Nonempty) : (consSet i X).
    Nonempty := by
  obtain ⟨?, h?⟩ := h; exact ⟨cons i ?, ?, h?, rfl⟩
end

section
theorem consSet_subset_of_subset {i : ℕ} {X X' : Set Gamma} (h : X ⊆ X') :
    consSet i X ⊆ consSet i X' := by
  rintro z ⟨?, h?, rfl⟩; exact ⟨?, h h?, rfl⟩
end

section
```

```
theorem consSet_subset {i : ℕ} {X X' : Set Gamma} :
    consSet i X ⊆ consSet i X' ↔ X ⊆ X' := by
  refine ⟨fun h ? h? => ?_, consSet_subset_of_subset⟩
  obtain ⟨?', h?', heq⟩ := h ⟨?, h?, rfl⟩
  rwa [(cons_injective heq.symm).2] at h?'
end

section

def nbhd : List ℕ → Set Gamma
  | [] => Set.univ
  | i :: l => consSet i (nbhd l)
end

section
@[simp] theorem nbhd_nil : nbhd [] = (Set.univ : Set Gamma) := rfl
end

section
@[simp] theorem nbhd_cons (i : ℕ) (l : List ℕ) : nbhd (i :: l) = consSet i (nbhd l) :=
     rfl
end

section

def Lmem (X : Set Gamma) : Prop := ∃ l, X = nbhd l
end

section
@[simp] theorem mem_nbhd (l : List ℕ) : Lmem (nbhd l) := ⟨l, rfl⟩
end

section

theorem L_nestedOrDisjoint : NestedOrDisjoint Lmem := by
  rintro X Y ⟨l, rfl⟩ ⟨l', rfl⟩
  induction l generalizing l' with
  | nil => exact Or.inr (Or.inl (by simp))
  | cons i s ih =>
    cases l' with
    | nil => exact Or.inl (by simp)
    | cons j t =>
      by_cases hij : i = j
      · subst hij
        rcases ih t with h1 | h2 | h3
        · exact Or.inl (by rw [nbhd_cons, nbhd_cons]; exact consSet_subset_of_subset h1
    )
        · exact Or.inr (Or.inl (by rw [nbhd_cons, nbhd_cons]; exact
    consSet_subset_of_subset h2))
        · exact Or.inr (Or.inr (by rw [nbhd_cons, nbhd_cons, consSet_inter, h3,
    consSet_empty]))
      · exact Or.inr (Or.inr (by rw [nbhd_cons, nbhd_cons]; exact consSet_inter_ne hij
    _ _))
end
```

```
end DomainTheory.NeighbourhoodSystems.Exercise724

section
namespace DomainTheory.NeighbourhoodSystems.Exercise724
open NeighborhoodSystem Domain.Recursive
section

abbrev L : NeighborhoodSystem Gamma :=
  NeighborhoodSystem.ofNestedOrDisjoint Lmem Set.univ Set.univ_nonempty
    (mem_nbhd []) L_nestedOrDisjoint
    (fun {X} _ => Set.subset_univ X)
end

section

def Lenum (n : ℕ) : Set Gamma := nbhd (decodeList n)
end

section
@[simp] theorem Lenum_mem (n : ℕ) : Lmem (Lenum n) := mem_nbhd (decodeList n)
end

section
theorem Lenum_surj {Y : Set Gamma} (hY : Lmem Y) : ∃ n, Lenum n = Y := by
  obtain ⟨l, rfl⟩ := hY
  exact ⟨encodeList l, by unfold Lenum; rw [decodeList_encodeList]⟩
end

section

theorem Lenum_zero : Lenum 0 = Set.univ := by unfold Lenum; rw [decodeList_zero]; rfl
end

section

def isPrefixChar (m n : ℕ) : ℕ := listEqChar (takeCode (listLenChar m) n) m
end

section

def LenumConsChar (n m : ℕ) : ℕ :=
  isPrefixChar m n + isPrefixChar n m - isPrefixChar m n * isPrefixChar n m
end

section

def LenumConsCharP (t : ℕ) : ℕ := LenumConsChar t.unpair.1 t.unpair.2
end

section
def LenumInter (n m : ℕ) : ℕ := selectFn (isPrefixChar m n) n m
end

section

def LenumInterEqChar (n m k : ℕ) : ℕ :=
```

```
  mulBit (isPrefixChar m n) (listEqChar k n) + mulBit (isPrefixChar n m) (listEqChar k
     m)
    - mulBit (isPrefixChar m n) (listEqChar k n) * mulBit (isPrefixChar n m) (
    listEqChar k m)
end

section

def LenumInterEqCharP (t : ℕ) : ℕ :=
  LenumInterEqChar t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair.2
end

section
theorem isPrefixChar_eq_one_iff (m n : ℕ) :
    isPrefixChar m n = 1 ↔ decodeList m <+: decodeList n := by
  unfold isPrefixChar
  rw [listEqChar_eq_one_iff, takeCode_eq, listLenChar_eq, List.prefix_iff_eq_take]
  exact eq_comm
end

section
theorem isPrefixChar_le_one (m n : ℕ) : isPrefixChar m n ≤ 1 := listEqChar_le_one _ _
end

section
theorem isPrefixChar_eq_zero_or_one (m n : ℕ) :
    isPrefixChar m n = 0 ∨ isPrefixChar m n = 1 := by
  have := isPrefixChar_le_one m n; omega
end

section
theorem LenumConsChar_eq_one_iff (n m : ℕ) :
    LenumConsChar n m = 1 ↔ isPrefixChar m n = 1 ∨ isPrefixChar n m = 1 := by
  unfold LenumConsChar
  rcases isPrefixChar_eq_zero_or_one m n with ha | ha <;>
    rcases isPrefixChar_eq_zero_or_one n m with hb | hb <;> simp [ha, hb]
end

section
theorem LenumConsChar_le_one (n m : ℕ) : LenumConsChar n m ≤ 1 := by
  unfold LenumConsChar
  rcases isPrefixChar_eq_zero_or_one m n with ha | ha <;>
    rcases isPrefixChar_eq_zero_or_one n m with hb | hb <;> simp [ha, hb]
end

section
theorem LenumConsCharP_le_one (t : ℕ) : LenumConsCharP t ≤ 1 :=
  LenumConsChar_le_one _ _
end

section
theorem mulBit_eq_zero_or_one {a b : ℕ} (ha : a ≤ 1) (hb : b ≤ 1) :
    mulBit a b = 0 ∨ mulBit a b = 1 := by
  have := mulBit_le_one ha hb; omega
end
```

```
section
theorem LenumInterEqChar_eq_one_iff (n m k : ℕ) :
    LenumInterEqChar n m k = 1 ↔
      (isPrefixChar m n = 1 ∧ decodeList k = decodeList n) ∨
      (isPrefixChar n m = 1 ∧ decodeList k = decodeList m) := by
  have hstep : LenumInterEqChar n m k = 1 ↔
      mulBit (isPrefixChar m n) (listEqChar k n) = 1 ∨
      mulBit (isPrefixChar n m) (listEqChar k m) = 1 := by
    unfold LenumInterEqChar
    rcases mulBit_eq_zero_or_one (isPrefixChar_le_one m n) (listEqChar_le_one k n)
    with ha | ha <;>
      rcases mulBit_eq_zero_or_one (isPrefixChar_le_one n m) (listEqChar_le_one k m)
    with hb | hb <;>
        simp [ha, hb]
  rw [hstep, mulBit_eq_one_iff, mulBit_eq_one_iff, listEqChar_eq_one_iff,
    listEqChar_eq_one_iff]
end

section
theorem LenumInterEqChar_le_one (n m k : ℕ) : LenumInterEqChar n m k ≤ 1 := by
  unfold LenumInterEqChar
  rcases mulBit_eq_zero_or_one (isPrefixChar_le_one m n) (listEqChar_le_one k n) with
    ha | ha <;>
    rcases mulBit_eq_zero_or_one (isPrefixChar_le_one n m) (listEqChar_le_one k m)
    with hb | hb <;>
      simp [ha, hb]
end

section
theorem LenumInterEqCharP_le_one (t : ℕ) : LenumInterEqCharP t ≤ 1 :=
  LenumInterEqChar_le_one _ _ _
end

section
theorem nbhd_nonempty : ∀ l : List ℕ, (nbhd l).Nonempty
  | [] => ⟨star, trivial⟩
  | _ :: l => consSet_nonempty (nbhd_nonempty l)
end

section
theorem primrec_isPrefixChar : Nat.Primrec (fun t => isPrefixChar t.unpair.1 t.unpair
    .2) := by
  have hlen : Nat.Primrec (fun t : ℕ => listLenChar t.unpair.1) := primrec_listLenChar
    .comp Nat.Primrec.left
  have htake : Nat.Primrec (fun t : ℕ => takeCode (listLenChar t.unpair.1) t.unpair.2)
     :=
    (primrec_takeCode.comp (Nat.Primrec.pair hlen Nat.Primrec.right)).of_eq fun t =>
    by
      simp only [unpair_pair_fst, unpair_pair_snd]
  exact (primrec_listEqChar.comp (Nat.Primrec.pair htake Nat.Primrec.left)).of_eq fun
    t => by
    simp only [isPrefixChar, unpair_pair_fst, unpair_pair_snd]
end

section
theorem primrec_LenumInterEqChar :
```

```
    Nat.Primrec (fun t => LenumInterEqChar t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.
    unpair.2) := by
  have hn : Nat.Primrec (fun t : ℕ => t.unpair.1) := Nat.Primrec.left
  have hm : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.right
  have hk : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.2) := Nat.Primrec.right.comp
    Nat.Primrec.right
  have hpmn : Nat.Primrec (fun t : ℕ => isPrefixChar t.unpair.2.unpair.1 t.unpair.1)
    :=
    (primrec_isPrefixChar.comp (Nat.Primrec.pair hm hn)).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hpnm : Nat.Primrec (fun t : ℕ => isPrefixChar t.unpair.1 t.unpair.2.unpair.1)
    :=
    (primrec_isPrefixChar.comp (Nat.Primrec.pair hn hm)).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hekn : Nat.Primrec (fun t : ℕ => listEqChar t.unpair.2.unpair.2 t.unpair.1) :=
    (primrec_listEqChar.comp (Nat.Primrec.pair hk hn)).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hekm : Nat.Primrec (fun t : ℕ => listEqChar t.unpair.2.unpair.2 t.unpair.2.
    unpair.1) :=
    (primrec_listEqChar.comp (Nat.Primrec.pair hk hm)).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have ha : Nat.Primrec (fun t : ℕ => mulBit (isPrefixChar t.unpair.2.unpair.1 t.
    unpair.1)
      (listEqChar t.unpair.2.unpair.2 t.unpair.1)) :=
    (primrec_mulBit.comp (Nat.Primrec.pair hpmn hekn)).of_eq fun t => by simp only [
    unpair_pair_fst, unpair_pair_snd]
  have hb : Nat.Primrec (fun t : ℕ => mulBit (isPrefixChar t.unpair.1 t.unpair.2.
    unpair.1)
      (listEqChar t.unpair.2.unpair.2 t.unpair.2.unpair.1)) :=
    (primrec_mulBit.comp (Nat.Primrec.pair hpnm hekm)).of_eq fun t => by simp only [
    unpair_pair_fst, unpair_pair_snd]
  exact (primrec_sub₂ (primrec_add₂ ha hb) (primrec_mul₂ ha hb)).of_eq fun t => by
    simp only [LenumInterEqChar]
end

section
theorem primrec_LenumInterEqCharP : Nat.Primrec LenumInterEqCharP :=
  primrec_LenumInterEqChar.of_eq fun t => by simp only [LenumInterEqCharP]
end

section

theorem primrec_isPrefixChar_swap :
    Nat.Primrec (fun t => isPrefixChar t.unpair.2 t.unpair.1) :=
  (primrec_isPrefixChar.comp (Nat.Primrec.pair Nat.Primrec.right Nat.Primrec.left)).
    of_eq
    fun t => by simp only [unpair_pair_fst, unpair_pair_snd]
end

section
theorem primrec_LenumConsChar :
    Nat.Primrec (fun t => LenumConsChar t.unpair.1 t.unpair.2) := by
  have ha : Nat.Primrec (fun t : ℕ => isPrefixChar t.unpair.2 t.unpair.1) :=
    primrec_isPrefixChar_swap
  have hb : Nat.Primrec (fun t : ℕ => isPrefixChar t.unpair.1 t.unpair.2) :=
```

```
    primrec_isPrefixChar
  exact (primrec_sub₂ (primrec_add₂ ha hb) (primrec_mul₂ ha hb)).of_eq fun t => by
    simp only [LenumConsChar]
end

section
theorem primrec_LenumConsCharP : Nat.Primrec LenumConsCharP :=
  primrec_LenumConsChar.of_eq fun t => by simp only [LenumConsCharP]
end

section
theorem primrec_LenumInter : Nat.Primrec (fun t => LenumInter t.unpair.1 t.unpair.2)
    :=
  (primrec_selectFn primrec_isPrefixChar_swap Nat.Primrec.left Nat.Primrec.right).
    of_eq
    fun t => by simp only [LenumInter]
end

section

theorem star_ne_cons (i : ℕ) (? : Gamma) : star = cons i ? := by
  cases ? <;> simp [star, cons]
end

section
theorem star_not_mem_consSet (i : ℕ) (X : Set Gamma) : star ∈ consSet i X := by
  rintro ⟨?, -, heq⟩; exact star_ne_cons i ? heq
end

section

theorem nbhd_subset_iff : ∀ (l l' : List ℕ), nbhd l ⊆ nbhd l' ↔ l' <+: l := by
  intro l
  induction l with
  | nil =>
    intro l'


    cases l' with
    | nil => simp
    | cons j t =>
      constructor
      · intro h
        exact absurd (h (Set.mem_univ star)) (by rw [nbhd_cons]; exact
    star_not_mem_consSet j (nbhd t))
      · rintro ⟨u, hu⟩
        simp at hu
  | cons i s ih =>
    intro l'
    cases l' with
    | nil => simp [nbhd_cons]
    | cons j t =>
      by_cases hij : i = j
      · subst hij
        rw [nbhd_cons, nbhd_cons, consSet_subset, ih t, List.cons_prefix_cons]
        simp
      · constructor
```

```
        · intro h
          exfalso
          obtain ⟨?, h?⟩ := nbhd_nonempty s
          have hmem : cons i ? ∈ consSet j (nbhd t) := h ⟨?, h?, rfl⟩
          obtain ⟨?', -, heq⟩ := hmem
          exact hij (cons_injective heq).1
        · intro h
          rw [List.cons_prefix_cons] at h
          exact absurd h.1.symm hij
end

section

theorem Lenum_subset_iff (n m : ℕ) : Lenum n ⊆ Lenum m ↔ isPrefixChar m n = 1 := by
  unfold Lenum; rw [nbhd_subset_iff, isPrefixChar_eq_one_iff]
end

section

theorem Lenum_cons_iff (n m : ℕ) :
    (∃ k, Lenum k ⊆ Lenum n ∩ Lenum m) ↔ isPrefixChar m n = 1 ∨ isPrefixChar n m = 1
    := by
  constructor
  · rintro ⟨k, hk⟩
    rcases L_nestedOrDisjoint (mem_nbhd (decodeList n)) (mem_nbhd (decodeList m)) with
     h | h | h
    · exact Or.inl ((isPrefixChar_eq_one_iff m n).mpr ((nbhd_subset_iff _ _).mp h))
    · exact Or.inr ((isPrefixChar_eq_one_iff n m).mpr ((nbhd_subset_iff _ _).mp h))
    · exfalso
      unfold Lenum at hk
      obtain ⟨t, ht⟩ := nbhd_nonempty (decodeList k)
      exact Set.notMem_empty t (h ▸ hk ht)
  · rintro (hp | hp)
    · exact ⟨n, Set.subset_inter subset_rfl ((Lenum_subset_iff n m).mpr hp)⟩
    · exact ⟨m, Set.subset_inter ((Lenum_subset_iff m n).mpr hp) subset_rfl⟩
end

section
theorem LenumInter_spec {n m : ℕ} (h : ∃ k, Lenum k ⊆ Lenum n ∩ Lenum m) :
    Lenum (LenumInter n m) = Lenum n ∩ Lenum m := by
  unfold LenumInter
  rcases isPrefixChar_eq_zero_or_one m n with h0 | h1
  · rw [h0, selectFn_zero]
    have hp : isPrefixChar n m = 1 := by
      rcases (Lenum_cons_iff n m).mp h with hp | hp
      · rw [h0] at hp; exact absurd hp (by decide)
      · exact hp
    exact (Set.inter_eq_right.mpr ((Lenum_subset_iff m n).mpr hp)).symm
  · rw [h1, selectFn_one]
    exact (Set.inter_eq_left.mpr ((Lenum_subset_iff n m).mpr h1)).symm
end

section
theorem Lenum_cons_charP_eq_one_iff (n m : ℕ) :
    (∃ k, Lenum k ⊆ Lenum n ∩ Lenum m) ↔ LenumConsCharP (Nat.pair n m) = 1 := by
  unfold LenumConsCharP
```

```
  rw [unpair_pair_fst, unpair_pair_snd, LenumConsChar_eq_one_iff]
  exact Lenum_cons_iff n m
end

section

theorem Lenum_cons_computable : RecDecidable₂ (fun n m => ∃ k, Lenum k ⊆ Lenum n ∩
    Lenum m) :=
  RecDecidable₂.of_paired_zero_one_char primrec_LenumConsCharP
    (fun t => by have := LenumConsCharP_le_one t; omega)
    Lenum_cons_charP_eq_one_iff
end

section

theorem nbhd_injective {l l' : List ℕ} (h : nbhd l = nbhd l') : l = l' := by
  have h1 : l' <+: l := (nbhd_subset_iff l l').mp h.subset
  have h2 : l <+: l' := (nbhd_subset_iff l' l).mp h.symm.subset
  exact (h1.eq_of_length (h1.length_le.antisymm h2.length_le)).symm
end

section

theorem Lenum_interEq_iff (n m k : ℕ) :
    Lenum n ∩ Lenum m = Lenum k ↔
      (isPrefixChar m n = 1 ∧ decodeList k = decodeList n) ∨
      (isPrefixChar n m = 1 ∧ decodeList k = decodeList m) := by
  unfold Lenum
  rcases L_nestedOrDisjoint (mem_nbhd (decodeList n)) (mem_nbhd (decodeList m)) with h
    | h | h
  · have hp : isPrefixChar m n = 1 := (isPrefixChar_eq_one_iff m n).mpr ((
    nbhd_subset_iff _ _).mp h)
    rw [Set.inter_eq_left.mpr h]
    constructor
    · intro heq; exact Or.inl ⟨hp, (nbhd_injective heq).symm⟩
    · rintro (⟨-, heq⟩ | ⟨hp', heq⟩)
      · rw [heq]
      · rw [isPrefixChar_eq_one_iff] at hp'
        rw [heq]
        exact Set.Subset.antisymm h ((nbhd_subset_iff (decodeList m) (decodeList n)).
    mpr hp')
  · have hp : isPrefixChar n m = 1 := (isPrefixChar_eq_one_iff n m).mpr ((
    nbhd_subset_iff _ _).mp h)
    rw [Set.inter_eq_right.mpr h]
    constructor
    · intro heq; exact Or.inr ⟨hp, (nbhd_injective heq).symm⟩
    · rintro (⟨hp', heq⟩ | ⟨-, heq⟩)
      · rw [isPrefixChar_eq_one_iff] at hp'
        rw [heq]
        exact Set.Subset.antisymm h ((nbhd_subset_iff (decodeList n) (decodeList m)).
    mpr hp')
      · rw [heq]
  · rw [h]
    have h1 : isPrefixChar m n = 1 := by
      intro hp; rw [isPrefixChar_eq_one_iff] at hp
      obtain ⟨t, ht⟩ := (nbhd_nonempty (decodeList n))
```

```
      exact Set.notMem_empty t (h ▶ Set.mem_inter ht ((nbhd_subset_iff _ _).mpr hp ht)
    )
    have h2 : isPrefixChar n m = 1 := by
      intro hp; rw [isPrefixChar_eq_one_iff] at hp
      obtain ⟨t, ht⟩ := (nbhd_nonempty (decodeList m))
      exact Set.notMem_empty t (h ▶ Set.mem_inter ((nbhd_subset_iff _ _).mpr hp ht) ht
    )
    constructor
    · intro heq; exact absurd heq.symm (nbhd_nonempty (decodeList k)).ne_empty
    · rintro (⟨hp, -⟩ | ⟨hp, -⟩)
      · exact absurd hp h1
      · exact absurd hp h2
end

section
theorem Lenum_interEq_charP_eq_one_iff (n m k : ℕ) :
    Lenum n ∩ Lenum m = Lenum k ↔ LenumInterEqCharP (Nat.pair n (Nat.pair m k)) = 1 :=
     by
  unfold LenumInterEqCharP
  simp only [unpair_pair_fst, unpair_pair_snd]
  rw [LenumInterEqChar_eq_one_iff]
  exact Lenum_interEq_iff n m k
end

section

theorem Lenum_interEq_computable : RecDecidable₃ (fun n m k => Lenum n ∩ Lenum m =
    Lenum k) :=
  RecDecidable₃.of_triple_zero_one_char primrec_LenumInterEqCharP
    (fun t => by have := LenumInterEqCharP_le_one t; omega)
    Lenum_interEq_charP_eq_one_iff
end

section

def Lpres : ComputablePresentation L where
  X := Lenum
  mem_X n := Lenum_mem n
  surj hY := Lenum_surj hY
  interEq_computable := Lenum_interEq_computable
  cons_computable := Lenum_cons_computable
  inter := LenumInter
  inter_primrec := primrec_LenumInter
  inter_spec h := LenumInter_spec h
  masterIdx := 0
  masterIdx_spec := Lenum_zero
end

section
open DomainTheory.NeighbourhoodSystems.Example12 (Token zero one)
variable {β ? ? : Type*}

structure LFunData {V : NeighborhoodSystem β} (P : ComputablePresentation V) where
  gN : ℕ → ℕ
  incl0 : ℕ → ℕ
  incl1 : ℕ → ℕ
```

```
  eq1 : ℕ → ℕ
  hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf Lpres P (decodeList c))
    : Set (ApproximableMap L V)).Nonempty
  hgNp : Nat.Primrec gN
  hincl0 : ∀ s, incl0 s = 1 ↔ Lpres.X s.unpair.1 ⊆ Lpres.X s.unpair.2
  hincl0p : Nat.Primrec incl0
  hincl1 : ∀ s, incl1 s = 1 ↔ P.X s.unpair.1 ⊆ P.X s.unpair.2
  hincl1p : Nat.Primrec incl1
  heq1 : ∀ s, eq1 s = 1 ↔ P.X s.unpair.1 = P.X s.unpair.2
  heq1p : Nat.Primrec eq1
end

section
instance : Nonempty Gamma := ⟨Sum.inl []⟩
end

section
@[simp] theorem cons_inl (i : ℕ) (l : List ℕ) : cons i (.inl l) = .inl (i :: l) := rfl
end

section
@[simp] theorem cons_inr (i : ℕ) (s : ℕ → ℕ) : cons i (.inr s) = .inr (streamCons i s
    ) := rfl
end

section
@[simp] theorem L_mem {X : Set Gamma} : L.mem X ↔ Lmem X := Iff.rfl
end

section
@[simp] theorem L_master : L.master = Set.univ := rfl
end

section

def LenumSubsetChar (t : ℕ) : ℕ := isPrefixChar t.unpair.2 t.unpair.1
end

section

def finPrefix (f : ℕ → ℕ) (n : ℕ) : List ℕ := (List.range n).map f
end

section
@[simp] theorem finPrefix_zero (f : ℕ → ℕ) : finPrefix f 0 = [] := rfl
end

section

def HasMin (x : L.Element) : Prop := ∃ X, x.mem X ∧ ∀ Y, x.mem Y → X ⊆ Y
end

section

def bitToNat (b : Bool) : ℕ := if b then 1 else 0
end
```

```
section
@[simp] theorem bitToNat_false : bitToNat false = 0 := rfl
end

section
@[simp] theorem bitToNat_true : bitToNat true = 1 := rfl
end

section

def embStr (σ : ExampleB.Str) : List ℕ := σ.map bitToNat
end

section
@[simp] theorem embStr_nil : embStr [] = [] := rfl
end

section
open DomainTheory.NeighbourhoodSystems.Example12 (Token zero one)

def Tenum (n : ℕ) : Set Token :=
  match n with
  | 0 => Example12.master
  | 1 => zero
  | _ => one

@[simp] theorem Tenum_zero : Tenum 0 = Example12.master := rfl

@[simp] theorem Tenum_one : Tenum 1 = zero := rfl

@[simp] theorem Tenum_two : Tenum 2 = one := rfl

theorem Tenum_eq_canon (n : ℕ) : Tenum n = Tenum (min n 2) := by
  rcases n with _ | _ | n
  · rfl
  · rfl
  · show one = Tenum (min (n + 2) 2)
    rw [show min (n + 2) 2 = 2 from by omega]
    rfl

theorem Tenum_mem (n : ℕ) : Example23.T.mem (Tenum n) := by
  rcases n with _ | _ | n
  · exact Example12.mem_master
  · exact Example12.mem_zero
  · exact Example12.mem_one

theorem Tenum_ne_empty (n : ℕ) : Tenum n = (∅ : Set Token) := by
  intro h
  exact Example12.not_mem_empty (h ▸ Tenum_mem n)

theorem Tenum_surj {Y : Set Token} (hY : Example23.T.mem Y) : ∃ n, Tenum n = Y := by
  rcases (Example12.mem_iff Y).mp hY with rfl | rfl | rfl
  · exact ⟨0, rfl⟩
  · exact ⟨1, rfl⟩
  · exact ⟨2, rfl⟩
```

```
def TeqChar (a b : ℕ) : ℕ := isZero ((a - b) + (b - a))

def TinterCode (a b : ℕ) : ℕ := if a = 0 then b else if b = 0 then a else if a = b
    then a else 3

def andCode (a b : ℕ) : ℕ := if a = 1 then b else if a = 2 then 2 else 0

noncomputable def andFn (X Y : Set Token) : Set Token :=
  if X = zero then Y else if X = one then one else Example12.master

theorem andFn_zero (Y : Set Token) : andFn zero Y = Y := by unfold andFn; rw [
    ite_eq_left rfl]

theorem eq_master_of_master_subset {Y : Set Token} (h : Example12.master ⊆ Y) :
    Y = Example12.master := (Set.univ_subset_iff.mp h : Y = Set.univ)

end

section

theorem exists_cons_prefix_of_prefix_of_length_lt {l l' : List ℕ} (h : l <+: l')
    (hlt : l.length < l'.length) : ∃ i, l ++ [i] <+: l' := by
  obtain ⟨r, hr⟩ := h
  cases r with
  | nil => simp [← hr] at hlt
  | cons i r' => exact ⟨i, r', by rw [← hr]; simp⟩
end

section

theorem exists_extend_of_not_hasMin {x : L.Element} (hx : ¬ HasMin x) {l : List ℕ}
    (hl : x.mem (nbhd l)) : ∃ i, x.mem (nbhd (l ++ [i])) := by
  have hex : ∃ Y, x.mem Y ∧ ¬ nbhd l ⊆ Y := by
    by_contra hc; push Not at hc; exact hx ⟨nbhd l, hl, hc⟩
  obtain ⟨Y, hYmem, hnsub⟩ := hex
  obtain ⟨l', rfl⟩ := x.sub hYmem
  rcases L_nestedOrDisjoint (mem_nbhd l) (mem_nbhd l') with hsub | hsub | hdisj
  · exact absurd hsub hnsub
  · have hpre : l <+: l' := (nbhd_subset_iff l' l).mp hsub
    have hne : l = l' := by rintro rfl; exact hnsub subset_rfl
    have hlt : l.length < l'.length :=
      lt_of_le_of_ne hpre.length_le (fun heqlen => hne (hpre.eq_of_length heqlen))
    obtain ⟨i, hi⟩ := exists_cons_prefix_of_prefix_of_length_lt hpre hlt
    exact ⟨i, x.up_mem hYmem (mem_nbhd _) ((nbhd_subset_iff l' (l ++ [i])).mpr hi)⟩
  · exfalso
    have hxmem : x.mem (nbhd l ∩ nbhd l') := x.inter_mem hl hYmem
    rw [hdisj] at hxmem
    obtain ⟨l'', hl''⟩ := x.sub hxmem
    exact (nbhd_nonempty l'').ne_empty hl''.symm
end

section

noncomputable def buildData (x : L.Element) (hx : ¬ HasMin x) :
    ∀ n : ℕ, {l : List ℕ // x.mem (nbhd l) ∧ l.length = n} :=
```

```
  fun n =>
    Nat.rec (⟨[], x.master_mem, rfl⟩ : {l : List ℕ // x.mem (nbhd l) ∧ l.length = 0})
      (fun n prev =>
        ⟨prev.1 ++ [Classical.choose (exists_extend_of_not_hasMin hx prev.2.1)],
          Classical.choose_spec (exists_extend_of_not_hasMin hx prev.2.1),
          by rw [List.length_append, List.length_singleton, prev.2.2]⟩)
      n
end

section
theorem finPrefix_length (f : ℕ → ℕ) (n : ℕ) : (finPrefix f n).length = n := by
  unfold finPrefix; rw [List.length_map, List.length_range]
end

section
theorem finPrefix_succ (f : ℕ → ℕ) (n : ℕ) :
    finPrefix f (n + 1) = finPrefix f n ++ [f n] := by
  unfold finPrefix; rw [List.range_succ, List.map_append, List.map_singleton]
end

section
theorem finPrefix_prefix_succ (f : ℕ → ℕ) (n : ℕ) : finPrefix f n <+: finPrefix f (n
    + 1) := by
  rw [finPrefix_succ]; exact List.prefix_append _ _
end

section
theorem finPrefix_prefix_of_le (f : ℕ → ℕ) {n m : ℕ} (h : n ≤ m) :
    finPrefix f n <+: finPrefix f m := by
  induction h with
  | refl => exact List.prefix_refl _
  | step _ ih => exact ih.trans (finPrefix_prefix_succ f _)
end

section
theorem finPrefix_take (f : ℕ → ℕ) {n m : ℕ} (h : n ≤ m) :
    (finPrefix f m).take n = finPrefix f n := by
  unfold finPrefix; rw [← List.map_take, List.take_range, min_eq_left h]
end

section
open DomainTheory.NeighbourhoodSystems.Example12 (Token zero one)

theorem master_ne_one_T : Example12.master = one := by
  intro h
  have h1 : (0 : Token) ∈ Example12.master := by simp [Example12.master]
  rw [h] at h1; simp [one] at h1

theorem master_ne_zero_T : Example12.master = zero := by
  intro h
  have h1 : (1 : Token) ∈ Example12.master := by simp [Example12.master]
  rw [h] at h1; simp [zero] at h1

theorem andFn_master (Y : Set Token) : andFn Example12.master Y = Example12.master :=
    by
  unfold andFn; rw [ite_eq_right master_ne_zero_T, ite_eq_right master_ne_one_T]
```

```
end

section

theorem nbhd_finPrefix_antitone (f : ℕ → ℕ) {n m : ℕ} (h : n ≤ m) :
    nbhd (finPrefix f m) ⊆ nbhd (finPrefix f n) :=

  (nbhd_subset_iff _ _).mpr (finPrefix_prefix_of_le f h)
end

section
open DomainTheory.NeighbourhoodSystems.Example12 (Token zero one)

def notCode (c : ℕ) : ℕ := if c = 1 then 2 else if c = 2 then 1 else 0

noncomputable def notFn (X : Set Token) : Set Token :=
  if X = zero then one else if X = one then zero else Example12.master

theorem notFn_master : notFn Example12.master = Example12.master := by
  unfold notFn; rw [ite_eq_right master_ne_zero_T, ite_eq_right master_ne_one_T]

theorem notFn_zero : notFn zero = one := by unfold notFn; rw [ite_eq_left rfl]

end

section
open DomainTheory.NeighbourhoodSystems.Example12 (Token zero one)
variable {β ? ? : Type*}

noncomputable def LFunData.ofPresentation {V : NeighborhoodSystem β} (P :
    ComputablePresentation V) :
    LFunData P where
  gN := funConsChar Lpres P Lpres.cons_computable.choose P.cons_computable.choose
  incl0 := Lpres.incl_computable.choose
  incl1 := P.incl_computable.choose
  eq1 := P.eq_computable.choose
  hgN := funConsChar_spec Lpres P Lpres.cons_computable.choose P.cons_computable.
    choose
    (fun s => (Lpres.cons_computable.choose_spec.2 s).symm)
    (fun s => (P.cons_computable.choose_spec.2 s).symm)
  hgNp := primrec_funConsChar Lpres P Lpres.cons_computable.choose P.cons_computable.
    choose
    Lpres.cons_computable.choose_spec.1 P.cons_computable.choose_spec.1
  hincl0 := fun s => (Lpres.incl_computable.choose_spec.2 s).symm
  hincl0p := Lpres.incl_computable.choose_spec.1
  hincl1 := fun s => (P.incl_computable.choose_spec.2 s).symm
  hincl1p := P.incl_computable.choose_spec.1
  heq1 := fun s => (P.eq_computable.choose_spec.2 s).symm
  heq1p := P.eq_computable.choose_spec.1
end

section
open DomainTheory.NeighbourhoodSystems.Example12 (Token zero one)

theorem one_inter_zero_T : one ∩ zero = (∅ : Set Token) := by
```

```
  ext t; fin_cases t <;> simp [zero, one]
end

section
open DomainTheory.NeighbourhoodSystems.Example12 (Token zero one)
variable {β ? ? : Type*}

def postcompose {V₁ : NeighborhoodSystem β} {V₂ : NeighborhoodSystem ?}
    (h : ApproximableMap V₁ V₂) : ApproximableMap (funSpace L V₁) (funSpace L V₂) :=
  curry (h.comp (evalMap L V₁))

def LFunData.pres {V : NeighborhoodSystem β} {P : ComputablePresentation V} (d :
    LFunData P) :
    ComputablePresentation (funSpace L V) :=
  funPresentation Lpres P d.gN d.incl0 d.incl1 d.eq1 d.hgN d.hgNp d.hincl0 d.hincl0p
    d.hincl1 d.hincl1p d.heq1 d.heq1p

end

section
open DomainTheory.NeighbourhoodSystems.Example12 (Token zero one)

theorem primrec_TeqChar {f g : ℕ → ℕ} (hf : Nat.Primrec f) (hg : Nat.Primrec g) :
    Nat.Primrec (fun n => TeqChar (f n) (g n)) :=
  (primrec_isZero.comp (primrec_add₂ (primrec_sub₂ hf hg) (primrec_sub₂ hg hf))).of_eq
    fun _ => rfl

theorem primrec_TinterCode {f g : ℕ → ℕ} (hf : Nat.Primrec f) (hg : Nat.Primrec g) :
    Nat.Primrec (fun n => TinterCode (f n) (g n)) := by
  have heq : Nat.Primrec (fun n => TeqChar (f n) (g n)) := primrec_TeqChar hf hg
  have hz1 := primrec_selectFn heq hf (Nat.Primrec.const 3)
  have hz2 := primrec_selectFn (primrec_isZero.comp hg) hf hz1
  refine (primrec_selectFn (primrec_isZero.comp hf) hg hz2).of_eq fun n => ?_
  unfold TinterCode TeqChar
  by_cases h0 : f n = 0
  · rw [ite_eq_left h0, h0, isZero]; simp
  · rw [ite_eq_right h0]
    have hz0 : isZero (f n) = 0 := by unfold isZero; omega
    rw [hz0, selectFn_zero]
    by_cases h1 : g n = 0
    · rw [ite_eq_left h1, h1, isZero]; simp
    · rw [ite_eq_right h1]
      have hz0' : isZero (g n) = 0 := by unfold isZero; omega
      rw [hz0', selectFn_zero]
      by_cases h2 : f n = g n
      · have : isZero ((f n - g n) + (g n - f n)) = 1 := by unfold isZero; omega
        rw [ite_eq_left h2, this, selectFn_one]
      · have : isZero ((f n - g n) + (g n - f n)) = 0 := by unfold isZero; omega
        rw [ite_eq_right h2, this, selectFn_zero]

end

section
theorem principal_hasMin (l : List ℕ) : HasMin (L.principal (mem_nbhd l)) :=
  ⟨nbhd l, ⟨mem_nbhd l, subset_rfl⟩, fun _ hY => hY.2⟩
end
```

```
section
open DomainTheory.NeighbourhoodSystems.Example12 (Token zero one)
variable {β ? ? : Type*}

def pwArg (V₀ : NeighborhoodSystem β) (V₁ : NeighborhoodSystem ?) :
    ApproximableMap (prod (prod (funSpace L V₀) (funSpace L V₁)) L) L :=
  proj₁ (prod (funSpace L V₀) (funSpace L V₁)) L

def pwFst (V₀ : NeighborhoodSystem β) (V₁ : NeighborhoodSystem ?) :
    ApproximableMap (prod (prod (funSpace L V₀) (funSpace L V₁)) L) (funSpace L V₀) :=
  (proj₀ (funSpace L V₀) (funSpace L V₁)).comp (proj₀ (prod (funSpace L V₀) (funSpace L
    V₁)) L)

def pwSnd (V₀ : NeighborhoodSystem β) (V₁ : NeighborhoodSystem ?) :
    ApproximableMap (prod (prod (funSpace L V₀) (funSpace L V₁)) L) (funSpace L V₁) :=
  (proj₁ (funSpace L V₀) (funSpace L V₁)).comp (proj₀ (prod (funSpace L V₀) (funSpace L
    V₁)) L)

def pointwiseBin {V₀ : NeighborhoodSystem β} {V₁ : NeighborhoodSystem ?} {V₂ :
    NeighborhoodSystem ?}
    (h : ApproximableMap (prod V₀ V₁) V₂) :
    ApproximableMap (prod (funSpace L V₀) (funSpace L V₁)) (funSpace L V₂) :=
  curry (h.comp (paired
    ((evalMap L V₀).comp (paired (pwFst V₀ V₁) (pwArg V₀ V₁)))
    ((evalMap L V₁).comp (paired (pwSnd V₀ V₁) (pwArg V₀ V₁)))))

end

section

def streamElement (f : ℕ → ℕ) : L.Element where
  mem Z := L.mem Z ∧ ∃ n, nbhd (finPrefix f n) ⊆ Z
  sub h := h.1
  master_mem := ⟨mem_nbhd [], 0, subset_rfl⟩
  inter_mem := by
    rintro X Y ⟨hXmem, n, hXsub⟩ ⟨hYmem, m, hYsub⟩
    have hn : nbhd (finPrefix f (max n m)) ⊆ X :=
      (nbhd_finPrefix_antitone f (le_max_left n m)).trans hXsub
    have hm : nbhd (finPrefix f (max n m)) ⊆ Y :=
      (nbhd_finPrefix_antitone f (le_max_right n m)).trans hYsub
    exact ⟨L.inter_mem hXmem hYmem (mem_nbhd _) (Set.subset_inter hn hm),
      max n m, Set.subset_inter hn hm⟩
  up_mem := by
    rintro X Y ⟨-, n, hn⟩ hYmem hXY
    exact ⟨hYmem, n, hn.trans hXY⟩
end

section

theorem finPrefix_eq_of_streamElement_eq {f₁ f₂ : ℕ → ℕ} (heq : streamElement f₁ =
    streamElement f₂) :
    ∀ n, finPrefix f₁ n = finPrefix f₂ n := by
  intro n
  have hmem1 : (streamElement f₁).mem (nbhd (finPrefix f₁ n)) := ⟨mem_nbhd _, n,
    subset_rfl⟩
```

```
  rw [heq] at hmem1
  obtain ⟨-, m, hm⟩ := hmem1
  have hpre : finPrefix f₁ n <+: finPrefix f₂ m := (nbhd_subset_iff _ _).mp hm
  have hlen : n ≤ m := by
    have hl := hpre.length_le; rwa [finPrefix_length, finPrefix_length] at hl
  have hpre' : finPrefix f₁ n = (finPrefix f₂ m).take (finPrefix f₁ n).length :=
    List.prefix_iff_eq_take.mp hpre
  rw [finPrefix_length] at hpre'
  rw [hpre', finPrefix_take f₂ hlen]
end

section

theorem streamElement_injective : Function.Injective streamElement := by
  intro f₁ f₂ heq
  have hpre := finPrefix_eq_of_streamElement_eq heq
  funext n
  have h1 := hpre (n + 1)
  rw [finPrefix_succ, finPrefix_succ, hpre n] at h1
  simpa using List.append_cancel_left h1
end

section

theorem streamElement_not_hasMin (f : ℕ → ℕ) : ¬ HasMin (streamElement f) := by
  rintro ⟨X, ⟨-, n, hXsub⟩, hmin⟩
  have hmemsucc : (streamElement f).mem (nbhd (finPrefix f (n + 1))) := ⟨mem_nbhd _, n
    + 1, subset_rfl⟩
  have hle : X ⊆ nbhd (finPrefix f (n + 1)) := hmin _ hmemsucc
  have heq : nbhd (finPrefix f n) = nbhd (finPrefix f (n + 1)) :=
    Set.Subset.antisymm (hXsub.trans hle) (nbhd_finPrefix_antitone f (Nat.le_succ n))
  have hlen := congrArg List.length (nbhd_injective heq)
  rw [finPrefix_length, finPrefix_length] at hlen
  omega
end

section
open DomainTheory.NeighbourhoodSystems.Example12 (Token zero one)

theorem subset_iff_eq_or_eq_master {X' X : Set Token} (hX' : Example23.T.mem X')
    (hX : Example23.T.mem X) (h : X' ⊆ X) : X' = X ∨ X = Example12.master := by
  rcases (Example12.mem_iff X).mp hX with rfl | rfl | rfl
  · exact Or.inr rfl
  · refine Or.inl ?_
    rcases (Example12.mem_iff X').mp hX' with rfl | rfl | rfl
    · exact absurd (show (1 : Token) ∈ zero from h (by simp [Example12.master])) (by
    simp [zero])
    · rfl
    · exact absurd (show (1 : Token) ∈ zero from h (by simp [one])) (by simp [zero])
  · refine Or.inl ?_
    rcases (Example12.mem_iff X').mp hX' with rfl | rfl | rfl
    · exact absurd (show (0 : Token) ∈ one from h (by simp [Example12.master])) (by
    simp [one])
    · exact absurd (show (0 : Token) ∈ one from h (by simp [zero])) (by simp [one])
    · rfl
end
```

```
section

def toElement : Gamma → L.Element
  | .inl l => L.principal (L_mem.mpr (mem_nbhd l))
  | .inr f => streamElement f
end

section

theorem toElement_injective : Function.Injective toElement := by
  rintro (l₁ | f₁) (l₂ | f₂) heq
  · exact congrArg Sum.inl
      (nbhd_injective (principal_injective (V := L) (mem_nbhd l₁) (mem_nbhd l₂) heq))
  · have heq' : L.principal (mem_nbhd l₁) = streamElement f₂ := heq
    exact absurd (heq' ▶ principal_hasMin l₁) (streamElement_not_hasMin f₂)
  · have heq' : streamElement f₁ = L.principal (mem_nbhd l₂) := heq
    exact absurd (principal_hasMin l₂) (heq' ▶ streamElement_not_hasMin f₁)
  · exact congrArg Sum.inr (streamElement_injective heq)
end

section

noncomputable def toStream (x : L.Element) (hx : ¬ HasMin x) (n : ℕ) : ℕ :=
  Classical.choose (exists_extend_of_not_hasMin hx (buildData x hx n).2.1)
end

section
theorem buildData_succ (x : L.Element) (hx : ¬ HasMin x) (n : ℕ) :
    (buildData x hx (n + 1)).1 = (buildData x hx n).1 ++ [toStream x hx n] := rfl
end

section
theorem buildData_eq_finPrefix (x : L.Element) (hx : ¬ HasMin x) :
    ∀ n, (buildData x hx n).1 = finPrefix (toStream x hx) n
  | 0 => rfl
  | n + 1 => by rw [buildData_succ, finPrefix_succ, buildData_eq_finPrefix x hx n]
end

section
theorem mem_nbhd_finPrefix_toStream (x : L.Element) (hx : ¬ HasMin x) (n : ℕ) :
    x.mem (nbhd (finPrefix (toStream x hx) n)) :=
  buildData_eq_finPrefix x hx n ▶ (buildData x hx n).2.1
end

section

theorem exists_finPrefix_subset_of_mem (x : L.Element) (hx : ¬ HasMin x) {Z : Set
    Gamma}
    (hZ : x.mem Z) : ∃ n, nbhd (finPrefix (toStream x hx) n) ⊆ Z := by
  obtain ⟨l, rfl⟩ := x.sub hZ
  refine ⟨l.length + 1, ?_⟩
  set n := l.length + 1
  have hn : x.mem (nbhd (finPrefix (toStream x hx) n)) := mem_nbhd_finPrefix_toStream
    x hx n
  have hinter := x.inter_mem hZ hn
```

```
  rcases L_nestedOrDisjoint (mem_nbhd l) (mem_nbhd (finPrefix (toStream x hx) n)) with
    hsub | hsub | hdisj
  ·
    have hpre : finPrefix (toStream x hx) n <+: l := (nbhd_subset_iff l _).mp hsub
    have := hpre.length_le
    rw [finPrefix_length] at this
    omega
  · exact hsub
  · exfalso
    rw [hdisj] at hinter
    obtain ⟨l', hl'⟩ := x.sub hinter
    exact (nbhd_nonempty l').ne_empty hl'.symm
end

section

theorem toElement_surjective : Function.Surjective toElement := by
  intro x
  by_cases hx : HasMin x
  · obtain ⟨X, hXmem, hXmin⟩ := hx
    obtain ⟨l, rfl⟩ := x.sub hXmem
    exact ⟨Sum.inl l, (eq_principal_of_isMin (V := L) x hXmem hXmin).symm⟩
  · exact ⟨Sum.inr (toStream x hx), by
      apply Element.ext
      intro Z
      constructor
      · rintro ⟨hZmem, n, hn⟩
        exact x.up_mem (mem_nbhd_finPrefix_toStream x hx n) hZmem hn
      · intro hZ
        exact ⟨x.sub hZ, exists_finPrefix_subset_of_mem x hx hZ⟩⟩
end

section

theorem toElement_bijective : Function.Bijective toElement :=
  ⟨toElement_injective, toElement_surjective⟩
end

section

noncomputable def gammaEquivElement : Gamma ≃ L.Element :=
  Equiv.ofBijective toElement toElement_bijective
end

section
open DomainTheory.NeighbourhoodSystems.Example12 (Token zero one)

theorem zero_inter_one_T : zero ∩ one = (∅ : Set Token) := by
  ext t; fin_cases t <;> simp [zero, one]

theorem Tenum_inter_eq {a b : ℕ} (ha : a ≤ 2) (hb : b ≤ 2) :
    Tenum a ∩ Tenum b = if a = 0 then Tenum b else if b = 0 then Tenum a
      else if a = b then Tenum a else (∅ : Set Token) := by
  interval_cases a <;> interval_cases b <;>
    simp [Tenum, Example12.master, Set.univ_inter, Set.inter_univ, Set.inter_self,
      zero_inter_one_T, one_inter_zero_T]
```

```
theorem Tenum_inter_eq_TinterCode' {a b : ℕ} (ha : a ≤ 2) (hb : b ≤ 2) :
    Tenum a ∩ Tenum b = if TinterCode a b = 3 then (∅ : Set Token) else Tenum (
    TinterCode a b) := by
  interval_cases a <;> interval_cases b <;>
    simp [Tenum, TinterCode, Example12.master, Set.univ_inter, Set.inter_univ, Set.
    inter_self,
      zero_inter_one_T, one_inter_zero_T]

theorem Tenum_inter_eq_TinterCode (n m : ℕ) :
    Tenum n ∩ Tenum m = if TinterCode (min n 2) (min m 2) = 3 then (∅ : Set Token)
      else Tenum (TinterCode (min n 2) (min m 2)) := by
  rw [Tenum_eq_canon n, Tenum_eq_canon m]
  exact Tenum_inter_eq_TinterCode' (Nat.min_le_right n 2) (Nat.min_le_right m 2)

theorem Tpres_cons_iff (n m : ℕ) :
    (∃ k, Tenum k ⊆ Tenum n ∩ Tenum m) ↔ TinterCode (min n 2) (min m 2) = 3 := by
  rw [Tenum_inter_eq_TinterCode n m]
  constructor
  · rintro ⟨k, hk⟩ hcontra
    rw [ite_eq_left hcontra] at hk
    exact Tenum_ne_empty k (Set.subset_empty_iff.mp hk)
  · intro hne
    rw [ite_eq_right hne]
    exact ⟨TinterCode (min n 2) (min m 2), subset_rfl⟩

theorem Tpres_cons_computable : RecDecidable₂ (fun n m => ∃ k, Tenum k ⊆ Tenum n ∩
    Tenum m) := by
  have ha : Nat.Primrec (fun t : ℕ => TinterCode (min t.unpair.1 2) (min t.unpair.2 2)
    ) :=
    primrec_TinterCode (primrec_min Nat.Primrec.left (Nat.Primrec.const 2))
      (primrec_min Nat.Primrec.right (Nat.Primrec.const 2))
  have hne : RecDecidable (fun t : ℕ => TinterCode (min t.unpair.1 2) (min t.unpair.2
    2) = 3) :=
    (RecDecidable.natEq ha (Nat.Primrec.const 3)).not
  exact RecDecidable.of_iff (fun t => Tpres_cons_iff t.unpair.1 t.unpair.2) hne

theorem zero_ne_one_T : zero = one := by
  intro h
  have h1 : (0 : Token) ∈ zero := by simp [zero]
  rw [h] at h1; simp [one] at h1

theorem Tenum_injOn {a b : ℕ} (ha : a ≤ 2) (hb : b ≤ 2) (h : Tenum a = Tenum b) : a =
    b := by
  interval_cases a <;> interval_cases b <;>
    simp only [Tenum_zero, Tenum_one, Tenum_two] at h <;>
    first
      | rfl
      | exact absurd h master_ne_zero_T
      | exact absurd h.symm master_ne_zero_T
      | exact absurd h master_ne_one_T
      | exact absurd h.symm master_ne_one_T
      | exact absurd h zero_ne_one_T
      | exact absurd h.symm zero_ne_one_T

theorem Tenum_interEq_iff {a b c : ℕ} (ha : a ≤ 2) (hb : b ≤ 2) (hc : c ≤ 2) :
```

```
    Tenum a ∩ Tenum b = Tenum c ↔ TinterCode a b = c := by
  rw [Tenum_inter_eq ha hb]
  unfold TinterCode
  split_ifs with h1 h2 h3
  · exact ⟨fun h => (Tenum_injOn hb hc h).symm ▸ rfl, fun h => h ▸ rfl⟩
  · exact ⟨fun h => (Tenum_injOn ha hc h).symm ▸ rfl, fun h => h ▸ rfl⟩
  · exact ⟨fun h => (Tenum_injOn ha hc h).symm ▸ rfl, fun h => h ▸ rfl⟩
  · exact ⟨fun h => absurd h.symm (Tenum_ne_empty c), fun h => absurd h.symm (by omega)⟩

theorem Tenum_interEq_iff' (n m k : ℕ) :
    Tenum n ∩ Tenum m = Tenum k ↔ TinterCode (min n 2) (min m 2) = min k 2 := by
  rw [Tenum_eq_canon n, Tenum_eq_canon m, Tenum_eq_canon k,
    Tenum_interEq_iff (Nat.min_le_right n 2) (Nat.min_le_right m 2) (Nat.min_le_right
    k 2)]

theorem Tpres_interEq_computable : RecDecidable₃ (fun n m k => Tenum n ∩ Tenum m =
    Tenum k) := by
  have ha : Nat.Primrec (fun t : ℕ => TinterCode (min t.unpair.1 2) (min t.unpair.2.
    unpair.1 2)) :=
    primrec_TinterCode (primrec_min Nat.Primrec.left (Nat.Primrec.const 2))
      (primrec_min (Nat.Primrec.left.comp Nat.Primrec.right) (Nat.Primrec.const 2))
  have hb : Nat.Primrec (fun t : ℕ => min t.unpair.2.unpair.2 2) :=
    primrec_min (Nat.Primrec.right.comp Nat.Primrec.right) (Nat.Primrec.const 2)
  exact RecDecidable.of_iff
    (fun t => Tenum_interEq_iff' t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair.2)
    (RecDecidable.natEq ha hb)

def Tpres : ComputablePresentation Example23.T where
  X := Tenum
  mem_X := Tenum_mem
  surj := Tenum_surj
  interEq_computable := Tpres_interEq_computable
  cons_computable := Tpres_cons_computable
  inter n m := TinterCode (min n 2) (min m 2)
  inter_primrec :=
    (primrec_TinterCode (primrec_min Nat.Primrec.left (Nat.Primrec.const 2))
      (primrec_min Nat.Primrec.right (Nat.Primrec.const 2))).of_eq fun _ => rfl
  inter_spec {n m} h := by
    rw [Tenum_inter_eq_TinterCode n m, ite_eq_right ((Tpres_cons_iff n m).mp h)]


  masterIdx := 0
  masterIdx_spec := rfl

end

section
open DomainTheory.NeighbourhoodSystems.Example12 (Token zero one)
variable {β ? ? : Type*}

noncomputable def LTdata : LFunData Tpres := LFunData.ofPresentation Tpres

noncomputable def LTpres : ComputablePresentation (funSpace L Example23.T) := LTdata.
    pres

end
```

```
section
open DomainTheory.NeighbourhoodSystems.Example12 (Token zero one)

theorem andFn_one (Y : Set Token) : andFn one Y = one := by
  unfold andFn; rw [ite_eq_right (Ne.symm zero_ne_one_T), ite_eq_left rfl]

theorem andFn_mem {X Y : Set Token} (hX : Example23.T.mem X) (hY : Example23.T.mem Y)
    :
    Example23.T.mem (andFn X Y) := by
  rcases (Example12.mem_iff X).mp hX with rfl | rfl | rfl
  · rw [andFn_master]; exact Example12.mem_master
  · rw [andFn_zero]; exact hY
  · rw [andFn_one]; exact Example12.mem_one

noncomputable def andMap2 : ApproximableMap₂ Example23.T Example23.T Example23.T where
  rel X Y Z := Example23.T.mem X ∧ Example23.T.mem Y ∧ Example23.T.mem Z ∧ andFn X Y ⊆
    Z
  rel_dom₀ h := h.1
  rel_dom₁ h := h.2.1
  rel_cod h := h.2.2.1
  master_rel := ⟨Example12.mem_master, Example12.mem_master, Example12.mem_master, by
    show andFn Example12.master Example12.master ⊆ Example12.master
    rw [andFn_master]⟩
  inter_right := by
    rintro X Y Z Z' ⟨hX, hY, hZ, hsub⟩ ⟨_, _, hZ', hsub'⟩
    exact ⟨hX, hY, Example23.T.inter_mem hZ hZ' (andFn_mem hX hY) (Set.subset_inter
    hsub hsub'),
      Set.subset_inter hsub hsub'⟩
  mono := by
    rintro X X' Y Y' Z Z' ⟨hX, hY, hZ, hsub⟩ hX'X hY'Y hZZ' hX' hY' hZ'
    refine ⟨hX', hY', hZ', ?_⟩
    rcases (Example12.mem_iff X).mp hX with rfl | rfl | rfl
    · rw [andFn_master] at hsub
      have hZ'master : Z' = Example12.master := eq_master_of_master_subset (hsub.trans
     hZZ')
      rw [hZ'master, Example12.master]; exact Set.subset_univ _
    · rw [andFn_zero] at hsub
      have hX'eq : X' = zero :=
        (subset_iff_eq_or_eq_master hX' Example12.mem_zero hX'X).resolve_right
          master_ne_zero_T.symm
      rw [hX'eq, andFn_zero]
      exact (hY'Y.trans hsub).trans hZZ'
    · rw [andFn_one] at hsub
      have hX'eq : X' = one :=
        (subset_iff_eq_or_eq_master hX' Example12.mem_one hX'X).resolve_right
          master_ne_one_T.symm
      rw [hX'eq, andFn_one]
      exact hsub.trans hZZ'

noncomputable def andT : ApproximableMap (prod Example23.T Example23.T) Example23.T :=
  ofMap₂ andMap2

theorem notFn_one : notFn one = zero := by
  unfold notFn; rw [ite_eq_right (Ne.symm zero_ne_one_T), ite_eq_left rfl]

theorem notFn_mem {X : Set Token} (hX : Example23.T.mem X) : Example23.T.mem (notFn X)
```

```
    := by
  rcases (Example12.mem_iff X).mp hX with rfl | rfl | rfl
  · rw [notFn_master]; exact Example12.mem_master
  · rw [notFn_zero]; exact Example12.mem_one
  · rw [notFn_one]; exact Example12.mem_zero

noncomputable def notT : ApproximableMap Example23.T Example23.T where
  rel X Y := Example23.T.mem X ∧ Example23.T.mem Y ∧ notFn X ⊆ Y
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨Example12.mem_master, Example12.mem_master, by
    show notFn Example12.master ⊆ Example12.master; rw [notFn_master]⟩
  inter_right := by
    rintro X Y Y' ⟨hX, hY, hsub⟩ ⟨_, hY', hsub'⟩
    exact ⟨hX, Example23.T.inter_mem hY hY' (notFn_mem hX) (Set.subset_inter hsub hsub
    '),
      Set.subset_inter hsub hsub'⟩
  mono := by
    rintro X X' Y Y' ⟨hX, hY, hsub⟩ hX'X hYY' hX' hY'
    refine ⟨hX', hY', ?_⟩
    rcases subset_iff_eq_or_eq_master hX' hX hX'X with heq | heq
    · rw [heq]; exact hsub.trans hYY'
    · rw [heq, notFn_master] at hsub
      have hY'master : Y' = Example12.master := eq_master_of_master_subset (hsub.trans
     hYY')
      rw [hY'master, Example12.master]; exact Set.subset_univ _

end

section
theorem bitToNat_injective : Function.Injective bitToNat := by
  intro a b h; cases a <;> cases b <;> simp_all [bitToNat]

theorem embStr_cons (b : Bool) (s : ExampleB.Str) : embStr (b :: s) = bitToNat b ::
    embStr s := rfl

theorem embStr_prefix_iff : ∀ σ τ : ExampleB.Str, embStr σ <+: embStr τ ↔ σ <+: τ :=
    by
  intro σ
  induction σ with
  | nil => intro τ; simp
  | cons b s ih =>
    intro τ
    cases τ with
    | nil => simp [embStr_cons]
    | cons c t =>
      rw [embStr_cons, embStr_cons, List.cons_prefix_cons, List.cons_prefix_cons,
        bitToNat_injective.eq_iff, ih t]

theorem cone_subset_cone_iff_nbhd_embStr (σ τ : ExampleB.Str) :
    ExampleB.cone σ ⊆ ExampleB.cone τ ↔ nbhd (embStr σ) ⊆ nbhd (embStr τ) := by
  rw [ExampleB.cone_subset_cone, nbhd_subset_iff, embStr_prefix_iff]

theorem sigmaBot_le_iff_toElement_inl_embStr (σ τ : ExampleB.Str) :
    ExampleB.sigmaBot σ ≤ ExampleB.sigmaBot τ ↔
      toElement (Sum.inl (embStr σ)) ≤ toElement (Sum.inl (embStr τ)) := by
```

```
  show ExampleB.sigmaBot σ ≤ ExampleB.sigmaBot τ ↔
      L.principal (L_mem.mpr (mem_nbhd (embStr σ))) ≤
        L.principal (L_mem.mpr (mem_nbhd (embStr τ)))
  rw [ExampleB.sigmaBot_le_iff, L.principal_le_iff, nbhd_subset_iff, embStr_prefix_iff
    ]

open DomainTheory.NeighbourhoodSystems.Example12 (Token zero one)

theorem primrec_notCode {f : ℕ → ℕ} (hf : Nat.Primrec f) : Nat.Primrec (fun n =>
    notCode (f n)) := by
  refine (primrec_selectFn (primrec_TeqChar hf (Nat.Primrec.const 1)) (Nat.Primrec.
    const 2)
     (primrec_selectFn (primrec_TeqChar hf (Nat.Primrec.const 2)) (Nat.Primrec.const 1)
       (Nat.Primrec.const 0))).of_eq fun n => ?_
  unfold notCode
  by_cases h1 : f n = 1
  · have h1' : TeqChar (f n) 1 = 1 := by unfold TeqChar isZero; omega
    rw [ite_eq_left h1, h1', selectFn_one]
  · have h1' : TeqChar (f n) 1 = 0 := by unfold TeqChar isZero; omega
    rw [ite_eq_right h1, h1', selectFn_zero]
    by_cases h2 : f n = 2
    · have h2' : TeqChar (f n) 2 = 1 := by unfold TeqChar isZero; omega
      rw [ite_eq_left h2, h2', selectFn_one]
    · have h2' : TeqChar (f n) 2 = 0 := by unfold TeqChar isZero; omega
      rw [ite_eq_right h2, h2', selectFn_zero]

theorem notFn_Tenum (n : ℕ) : notFn (Tenum n) = Tenum (notCode (min n 2)) := by
  rw [Tenum_eq_canon n]
  have hc2 : min n 2 ≤ 2 := Nat.min_le_right n 2
  interval_cases (min n 2) <;> simp [Tenum, notCode, notFn_master, notFn_zero,
    notFn_one]

theorem notT_isComputable : ComputableMap Tpres Tpres notT := by
  constructor
  have hcomp : Nat.Primrec (fun t : ℕ => Nat.pair (notCode (min t.unpair.1 2)) t.
    unpair.2) :=
    (primrec_notCode (primrec_min Nat.Primrec.left (Nat.Primrec.const 2))).pair Nat.
    Primrec.right
  have hdec : RecDecidable₂ (fun n m => Tenum (notCode (min n 2)) ⊆ Tenum m) :=
    RecDecidable.of_iff (fun t => by simp only [unpair_pair_fst, unpair_pair_snd]; rfl
    )
      (Tpres.incl_computable.comp hcomp)
  have hiff : ∀ n m, notT.rel (Tenum n) (Tenum m) ↔ Tenum (notCode (min n 2)) ⊆ Tenum
     m := by
    intro n m
    show (Example23.T.mem (Tenum n) ∧ Example23.T.mem (Tenum m) ∧ notFn (Tenum n) ⊆
    Tenum m) ↔ _
    rw [notFn_Tenum]
    exact ⟨fun h => h.2.2, fun h => ⟨Tenum_mem n, Tenum_mem m, h⟩⟩
  have key : RecDecidable₂ (fun n m => notT.rel (Tenum n) (Tenum m)) :=
    RecDecidable.of_iff (fun t => hiff t.unpair.1 t.unpair.2) hdec
  exact key.re

theorem primrec_andCode {f g : ℕ → ℕ} (hf : Nat.Primrec f) (hg : Nat.Primrec g) :
    Nat.Primrec (fun n => andCode (f n) (g n)) := by
  refine (primrec_selectFn (primrec_TeqChar hf (Nat.Primrec.const 1)) hg
```

```
    (primrec_selectFn (primrec_TeqChar hf (Nat.Primrec.const 2)) (Nat.Primrec.const 2)
      (Nat.Primrec.const 0))).of_eq fun n => ?_
  unfold andCode
  by_cases h1 : f n = 1
  · have h1' : TeqChar (f n) 1 = 1 := by unfold TeqChar isZero; omega
    rw [ite_eq_left h1, h1', selectFn_one]
  · have h1' : TeqChar (f n) 1 = 0 := by unfold TeqChar isZero; omega
    rw [ite_eq_right h1, h1', selectFn_zero]
    by_cases h2 : f n = 2
    · have h2' : TeqChar (f n) 2 = 1 := by unfold TeqChar isZero; omega
      rw [ite_eq_left h2, h2', selectFn_one]
    · have h2' : TeqChar (f n) 2 = 0 := by unfold TeqChar isZero; omega
      rw [ite_eq_right h2, h2', selectFn_zero]

theorem andFn_Tenum (n m : ℕ) :
    andFn (Tenum n) (Tenum m) = Tenum (andCode (min n 2) (min m 2)) := by
  rw [Tenum_eq_canon n, Tenum_eq_canon m]
  have hn2 : min n 2 ≤ 2 := Nat.min_le_right n 2
  have hm2 : min m 2 ≤ 2 := Nat.min_le_right m 2
  interval_cases (min n 2) <;> interval_cases (min m 2) <;>
    simp [Tenum, andCode, andFn_master, andFn_zero, andFn_one]

theorem andT_isComputable : ComputableMap (prodPresentation Tpres Tpres) Tpres andT :=
    by
  constructor
  have hcomp : Nat.Primrec (fun s : ℕ => Nat.pair
      (andCode (min s.unpair.1.unpair.1 2) (min s.unpair.1.unpair.2 2)) s.unpair.2) :=
    (primrec_andCode (primrec_min (Nat.Primrec.left.comp Nat.Primrec.left) (Nat.
    Primrec.const 2))
      (primrec_min (Nat.Primrec.right.comp Nat.Primrec.left) (Nat.Primrec.const 2))).
    pair
      Nat.Primrec.right
  have hdec : RecDecidable₂
      (fun t k => Tenum (andCode (min t.unpair.1 2) (min t.unpair.2 2)) ⊆ Tenum k) :=
    RecDecidable.of_iff (fun s => by simp only [unpair_pair_fst, unpair_pair_snd]; rfl
    )
      (Tpres.incl_computable.comp hcomp)
  have hiff : ∀ n m k, andT.rel (prodNbhd (Tenum n) (Tenum m)) (Tenum k) ↔
      Tenum (andCode (min n 2) (min m 2)) ⊆ Tenum k := by
    intro n m k
    have hstep : andT.rel (prodNbhd (Tenum n) (Tenum m)) (Tenum k) ↔
        andMap2.rel (Tenum n) (Tenum m) (Tenum k) := by
      show ((prod Example23.T Example23.T).mem (prodNbhd (Tenum n) (Tenum m)) ∧
        andMap2.rel (Sum.inl ^-1' prodNbhd (Tenum n) (Tenum m))
          (Sum.inr ^-1' prodNbhd (Tenum n) (Tenum m)) (Tenum k)) ↔ _
      rw [inl_preimage_prodNbhd, inr_preimage_prodNbhd]
      exact and_iff_right (prod_mem_prodNbhd (Tenum_mem n) (Tenum_mem m))
    rw [hstep]
    show (Example23.T.mem (Tenum n) ∧ Example23.T.mem (Tenum m) ∧ Example23.T.mem (
    Tenum k) ∧
      andFn (Tenum n) (Tenum m) ⊆ Tenum k) ↔ _
    rw [andFn_Tenum n m]
    exact ⟨fun h => h.2.2.2, fun h => ⟨Tenum_mem n, Tenum_mem m, Tenum_mem k, h⟩⟩
  have key : RecDecidable₂
      (fun t k => andT.rel ((prodPresentation Tpres Tpres).X t) (Tpres.X k)) :=
    RecDecidable.of_iff (fun s => by
```

```
      show andT.rel ((prodPresentation Tpres Tpres).X s.unpair.1) (Tpres.X s.unpair.2)
     ↔ _
      rw [prodPresentation_X]
      exact hiff s.unpair.1.unpair.1 s.unpair.1.unpair.2 s.unpair.2) hdec
  exact key.re

variable {β ? ? : Type*}

theorem postcompose_isComputable {V₁ : NeighborhoodSystem β} {V₂ : NeighborhoodSystem
    ?}
    {P₁ : ComputablePresentation V₁} {P₂ : ComputablePresentation V₂}
    (d₁ : LFunData P₁) (d₂ : LFunData P₂) {h : ApproximableMap V₁ V₂}
    (hh : ComputableMap P₁ P₂ h) :
    ComputableMap d₁.pres d₂.pres (postcompose h) := by
  have heval : ComputableMap (prodPresentation d₁.pres Lpres) P₁ (evalMap L V₁) :=
    evalMap_isComputable Lpres P₁ d₁.gN d₁.incl0 d₁.incl1 d₁.eq1
      d₁.hgN d₁.hgNp d₁.hincl0 d₁.hincl0p d₁.hincl1 d₁.hincl1p d₁.heq1 d₁.heq1p
  exact curry_isComputable d₁.pres Lpres P₂ d₂.gN d₂.incl0 d₂.incl1 d₂.eq1
    d₂.hgN d₂.hgNp d₂.hincl0 d₂.hincl0p d₂.hincl1 d₂.hincl1p d₂.heq1 d₂.heq1p
    (comp_isComputable heval hh)

theorem pointwiseBin_isComputable {V₀ : NeighborhoodSystem β} {V₁ : NeighborhoodSystem
    ?}
    {V₂ : NeighborhoodSystem ?} {P₀ : ComputablePresentation V₀} {P₁ :
    ComputablePresentation V₁}
    {P₂ : ComputablePresentation V₂} (d₀ : LFunData P₀) (d₁ : LFunData P₁) (d₂ :
    LFunData P₂)
    {h : ApproximableMap (prod V₀ V₁) V₂} (hh : ComputableMap (prodPresentation P₀ P₁) P
    ₂ h) :
    ComputableMap (prodPresentation d₀.pres d₁.pres) d₂.pres (pointwiseBin h) := by
  have h?AB : ComputableMap (prodPresentation (prodPresentation d₀.pres d₁.pres) Lpres)
      (prodPresentation d₀.pres d₁.pres) (proj₀ (prod (funSpace L V₀) (funSpace L V₁)) L
    ) :=
    proj₀_isComputable (prodPresentation d₀.pres d₁.pres) Lpres
  have h?L : ComputableMap (prodPresentation (prodPresentation d₀.pres d₁.pres) Lpres)
    Lpres
      (proj₁ (prod (funSpace L V₀) (funSpace L V₁)) L) :=
    proj₁_isComputable (prodPresentation d₀.pres d₁.pres) Lpres
  have hp0 : ComputableMap (prodPresentation (prodPresentation d₀.pres d₁.pres) Lpres)
    d₀.pres
      (pwFst V₀ V₁) := comp_isComputable h?AB (proj₀_isComputable d₀.pres d₁.pres)
  have hp1 : ComputableMap (prodPresentation (prodPresentation d₀.pres d₁.pres) Lpres)
    d₁.pres
      (pwSnd V₀ V₁) := comp_isComputable h?AB (proj₁_isComputable d₀.pres d₁.pres)
  have heval0 : ComputableMap (prodPresentation (prodPresentation d₀.pres d₁.pres)
    Lpres) P₀
      ((evalMap L V₀).comp (paired (pwFst V₀ V₁) (pwArg V₀ V₁))) :=
    comp_isComputable (paired_isComputable hp0 h?L)
      (evalMap_isComputable Lpres P₀ d₀.gN d₀.incl0 d₀.incl1 d₀.eq1
        d₀.hgN d₀.hgNp d₀.hincl0 d₀.hincl0p d₀.hincl1 d₀.hincl1p d₀.heq1 d₀.heq1p)
  have heval1 : ComputableMap (prodPresentation (prodPresentation d₀.pres d₁.pres)
    Lpres) P₁
      ((evalMap L V₁).comp (paired (pwSnd V₀ V₁) (pwArg V₀ V₁))) :=
    comp_isComputable (paired_isComputable hp1 h?L)
      (evalMap_isComputable Lpres P₁ d₁.gN d₁.incl0 d₁.incl1 d₁.eq1
        d₁.hgN d₁.hgNp d₁.hincl0 d₁.hincl0p d₁.hincl1 d₁.hincl1p d₁.heq1 d₁.heq1p)
```

```
  exact curry_isComputable (prodPresentation d₀.pres d₁.pres) Lpres P₂ d₂.gN d₂.incl0 d₂
    .incl1
    d₂.eq1 d₂.hgN d₂.hgNp d₂.hincl0 d₂.hincl0p d₂.hincl1 d₂.hincl1p d₂.heq1 d₂.heq1p
    (comp_isComputable (paired_isComputable heval0 heval1) hh)

theorem notT_lifted_isComputable : ComputableMap LTpres LTpres (postcompose notT) :=
  postcompose_isComputable LTdata LTdata notT_isComputable

theorem andT_lifted_isComputable :
    ComputableMap (prodPresentation LTpres LTpres) LTpres (pointwiseBin andT) :=
  pointwiseBin_isComputable LTdata LTdata LTdata andT_isComputable

theorem deMorganT_isComputable :
    ComputableMap (prodPresentation LTpres LTpres) LTpres
      ((postcompose notT).comp (pointwiseBin andT)
        |>.comp (paired
          (postcompose notT |>.comp (proj₀ (funSpace L Example23.T) (funSpace L
    Example23.T)))
          (postcompose notT |>.comp (proj₁ (funSpace L Example23.T) (funSpace L
    Example23.T))))) :=
  comp_isComputable
    (paired_isComputable
      (comp_isComputable (proj₀_isComputable LTpres LTpres) notT_lifted_isComputable)
      (comp_isComputable (proj₁_isComputable LTpres LTpres) notT_lifted_isComputable))
    (comp_isComputable andT_lifted_isComputable notT_lifted_isComputable)
end

section

theorem Gamma_cases (? : Gamma) : ? = star ∨ ∃ i ?', ? = cons i ?' := by
  cases ? with
  | inl l =>
    cases l with
    | nil => exact Or.inl rfl
    | cons i l' => exact Or.inr ⟨i, .inl l', rfl⟩
  | inr s =>
    refine Or.inr ⟨s 0, .inr (fun n => s (n + 1)), ?_⟩
    simp only [cons]
    congr 1
    funext n
    cases n <;> rfl
end

section

theorem L_isEffectivelyGiven : L.IsEffectivelyGiven := ⟨Lpres⟩
end

section
set_option linter.unusedVariables false

theorem example_724 : And
  (And
    (And
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven
        DomainTheory.NeighbourhoodSystems.Exercise724.Gamma DomainTheory.
```

```
NeighbourhoodSystems.Exercise724.L)
   (@DomainTheory.NeighbourhoodSystems.ComputableMap
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
       DomainTheory.NeighbourhoodSystems.Example23.T)
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
       DomainTheory.NeighbourhoodSystems.Example23.T)
     (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
.Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
       DomainTheory.NeighbourhoodSystems.Example23.T)
     (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
.Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
       DomainTheory.NeighbourhoodSystems.Example23.T)
     DomainTheory.NeighbourhoodSystems.Exercise724.LTpres DomainTheory.
NeighbourhoodSystems.Exercise724.LTpres
     (@DomainTheory.NeighbourhoodSystems.Exercise724.postcompose DomainTheory.
NeighbourhoodSystems.Example12.Token
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Example23.T
       DomainTheory.NeighbourhoodSystems.Example23.T DomainTheory.
NeighbourhoodSystems.Exercise724.notT)))
 (@DomainTheory.NeighbourhoodSystems.ComputableMap
   (Sum
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
       DomainTheory.NeighbourhoodSystems.Example23.T)
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
       DomainTheory.NeighbourhoodSystems.Example23.T))
   (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
     DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
     DomainTheory.NeighbourhoodSystems.Example23.T)
   (@DomainTheory.NeighbourhoodSystems.prod
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
       DomainTheory.NeighbourhoodSystems.Example23.T)
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
```

```
  NeighbourhoodSystems.Exercise724.L
        DomainTheory.NeighbourhoodSystems.Example23.T)
      (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
  .Exercise724.Gamma
        DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
        DomainTheory.NeighbourhoodSystems.Example23.T)
      (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
  .Exercise724.Gamma
        DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
        DomainTheory.NeighbourhoodSystems.Example23.T))
     (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems.
  Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
       DomainTheory.NeighbourhoodSystems.Example23.T)
     (@DomainTheory.NeighbourhoodSystems.prodPresentation
       (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
  NeighbourhoodSystems.Exercise724.Gamma
        DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
        DomainTheory.NeighbourhoodSystems.Example23.T)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
  NeighbourhoodSystems.Exercise724.Gamma
        DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
        DomainTheory.NeighbourhoodSystems.Example23.T)
      (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
  .Exercise724.Gamma
        DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
        DomainTheory.NeighbourhoodSystems.Example23.T)
      (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
  .Exercise724.Gamma
        DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
        DomainTheory.NeighbourhoodSystems.Example23.T)
       DomainTheory.NeighbourhoodSystems.Exercise724.LTpres DomainTheory.
  NeighbourhoodSystems.Exercise724.LTpres)
     DomainTheory.NeighbourhoodSystems.Exercise724.LTpres
     (@DomainTheory.NeighbourhoodSystems.Exercise724.pointwiseBin DomainTheory.
  NeighbourhoodSystems.Example12.Token
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Example12.Token
       DomainTheory.NeighbourhoodSystems.Example23.T DomainTheory.
  NeighbourhoodSystems.Example23.T
       DomainTheory.NeighbourhoodSystems.Example23.T DomainTheory.
  NeighbourhoodSystems.Exercise724.andT)))
(@Function.Bijective DomainTheory.NeighbourhoodSystems.Exercise724.Gamma
   (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.Exercise724.Gamma
     DomainTheory.NeighbourhoodSystems.Exercise724.L)
   DomainTheory.NeighbourhoodSystems.Exercise724.toElement) :=
@And.intro
(And
```

```
(And
  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven
    DomainTheory.NeighbourhoodSystems.Exercise724.Gamma DomainTheory.
NeighbourhoodSystems.Exercise724.L)
  (@DomainTheory.NeighbourhoodSystems.ComputableMap
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
      DomainTheory.NeighbourhoodSystems.Example23.T)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
      DomainTheory.NeighbourhoodSystems.Example23.T)
    (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
.Exercise724.Gamma
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
      DomainTheory.NeighbourhoodSystems.Example23.T)
    (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
.Exercise724.Gamma
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
      DomainTheory.NeighbourhoodSystems.Example23.T)
    DomainTheory.NeighbourhoodSystems.Exercise724.LTpres DomainTheory.
NeighbourhoodSystems.Exercise724.LTpres
    (@DomainTheory.NeighbourhoodSystems.Exercise724.postcompose DomainTheory.
NeighbourhoodSystems.Example12.Token


      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Example23.T
      DomainTheory.NeighbourhoodSystems.Example23.T DomainTheory.
NeighbourhoodSystems.Exercise724.notT)))
(@DomainTheory.NeighbourhoodSystems.ComputableMap
  (Sum
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
      DomainTheory.NeighbourhoodSystems.Example23.T)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
      DomainTheory.NeighbourhoodSystems.Example23.T))
  (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
    DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
    DomainTheory.NeighbourhoodSystems.Example23.T)
  (@DomainTheory.NeighbourhoodSystems.prod
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
```

```
       DomainTheory.NeighbourhoodSystems.Example23.T)
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
  NeighbourhoodSystems.Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
       DomainTheory.NeighbourhoodSystems.Example23.T)
     (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
  .Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
       DomainTheory.NeighbourhoodSystems.Example23.T)
     (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
  .Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
       DomainTheory.NeighbourhoodSystems.Example23.T))
    (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems.
  Exercise724.Gamma
     DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
     DomainTheory.NeighbourhoodSystems.Example23.T)
    (@DomainTheory.NeighbourhoodSystems.prodPresentation
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
  NeighbourhoodSystems.Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
       DomainTheory.NeighbourhoodSystems.Example23.T)
     (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
  NeighbourhoodSystems.Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
       DomainTheory.NeighbourhoodSystems.Example23.T)
     (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
  .Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
       DomainTheory.NeighbourhoodSystems.Example23.T)
     (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
  .Exercise724.Gamma
       DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
       DomainTheory.NeighbourhoodSystems.Example23.T)
     DomainTheory.NeighbourhoodSystems.Exercise724.LTpres DomainTheory.
  NeighbourhoodSystems.Exercise724.LTpres)
    DomainTheory.NeighbourhoodSystems.Exercise724.LTpres
    (@DomainTheory.NeighbourhoodSystems.Exercise724.pointwiseBin DomainTheory.
  NeighbourhoodSystems.Example12.Token
     DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Example12.Token
     DomainTheory.NeighbourhoodSystems.Example23.T DomainTheory.
  NeighbourhoodSystems.Example23.T
     DomainTheory.NeighbourhoodSystems.Example23.T DomainTheory.
  NeighbourhoodSystems.Exercise724.andT)))
(@Function.Bijective DomainTheory.NeighbourhoodSystems.Exercise724.Gamma
  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element DomainTheory.
  NeighbourhoodSystems.Exercise724.Gamma
```

```
    DomainTheory.NeighbourhoodSystems.Exercise724.L)
  DomainTheory.NeighbourhoodSystems.Exercise724.toElement)
(@And.intro
  (And
    (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven
      DomainTheory.NeighbourhoodSystems.Exercise724.Gamma DomainTheory.
  NeighbourhoodSystems.Exercise724.L)
    (@DomainTheory.NeighbourhoodSystems.ComputableMap
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
  NeighbourhoodSystems.Exercise724.Gamma
        DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
        DomainTheory.NeighbourhoodSystems.Example23.T)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
  NeighbourhoodSystems.Exercise724.Gamma
        DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
        DomainTheory.NeighbourhoodSystems.Example23.T)
      (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
  .Exercise724.Gamma
        DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
        DomainTheory.NeighbourhoodSystems.Example23.T)
      (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
  .Exercise724.Gamma
        DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
        DomainTheory.NeighbourhoodSystems.Example23.T)
      DomainTheory.NeighbourhoodSystems.Exercise724.LTpres DomainTheory.
  NeighbourhoodSystems.Exercise724.LTpres
      (@DomainTheory.NeighbourhoodSystems.Exercise724.postcompose DomainTheory.
  NeighbourhoodSystems.Example12.Token
        DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Example23.T
        DomainTheory.NeighbourhoodSystems.Example23.T DomainTheory.
  NeighbourhoodSystems.Exercise724.notT)))
  (@DomainTheory.NeighbourhoodSystems.ComputableMap
    (Sum
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
  NeighbourhoodSystems.Exercise724.Gamma
        DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
        DomainTheory.NeighbourhoodSystems.Example23.T)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
  NeighbourhoodSystems.Exercise724.Gamma
        DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
        DomainTheory.NeighbourhoodSystems.Example23.T))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
  NeighbourhoodSystems.Exercise724.Gamma
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
  NeighbourhoodSystems.Exercise724.L
      DomainTheory.NeighbourhoodSystems.Example23.T)
    (@DomainTheory.NeighbourhoodSystems.prod
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
  NeighbourhoodSystems.Exercise724.Gamma
```

```
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
      DomainTheory.NeighbourhoodSystems.Example23.T)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
      DomainTheory.NeighbourhoodSystems.Example23.T)
    (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
.Exercise724.Gamma
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
      DomainTheory.NeighbourhoodSystems.Example23.T)
    (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
.Exercise724.Gamma
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
      DomainTheory.NeighbourhoodSystems.Example23.T))
  (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems.
Exercise724.Gamma
    DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
    DomainTheory.NeighbourhoodSystems.Example23.T)
  (@DomainTheory.NeighbourhoodSystems.prodPresentation
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
      DomainTheory.NeighbourhoodSystems.Example23.T)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
NeighbourhoodSystems.Exercise724.Gamma
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
      DomainTheory.NeighbourhoodSystems.Example23.T)
    (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
.Exercise724.Gamma
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
      DomainTheory.NeighbourhoodSystems.Example23.T)
    (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
.Exercise724.Gamma
      DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Exercise724.L
      DomainTheory.NeighbourhoodSystems.Example23.T)
    DomainTheory.NeighbourhoodSystems.Exercise724.LTpres DomainTheory.
NeighbourhoodSystems.Exercise724.LTpres)
  DomainTheory.NeighbourhoodSystems.Exercise724.LTpres
  (@DomainTheory.NeighbourhoodSystems.Exercise724.pointwiseBin DomainTheory.
NeighbourhoodSystems.Example12.Token
    DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
NeighbourhoodSystems.Example12.Token
    DomainTheory.NeighbourhoodSystems.Example23.T DomainTheory.
NeighbourhoodSystems.Example23.T
    DomainTheory.NeighbourhoodSystems.Example23.T DomainTheory.
NeighbourhoodSystems.Exercise724.andT))
(@And.intro
```

```
      (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven
        DomainTheory.NeighbourhoodSystems.Exercise724.Gamma DomainTheory.
    NeighbourhoodSystems.Exercise724.L)
      (@DomainTheory.NeighbourhoodSystems.ComputableMap
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
    NeighbourhoodSystems.Exercise724.Gamma
          DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.Exercise724.L
          DomainTheory.NeighbourhoodSystems.Example23.T)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap DomainTheory.
    NeighbourhoodSystems.Exercise724.Gamma
          DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.Exercise724.L
          DomainTheory.NeighbourhoodSystems.Example23.T)
        (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
    .Exercise724.Gamma
          DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.Exercise724.L
          DomainTheory.NeighbourhoodSystems.Example23.T)
        (@DomainTheory.NeighbourhoodSystems.funSpace DomainTheory.NeighbourhoodSystems
    .Exercise724.Gamma
          DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.Exercise724.L
          DomainTheory.NeighbourhoodSystems.Example23.T)
        DomainTheory.NeighbourhoodSystems.Exercise724.LTpres DomainTheory.
    NeighbourhoodSystems.Exercise724.LTpres
        (@DomainTheory.NeighbourhoodSystems.Exercise724.postcompose DomainTheory.
    NeighbourhoodSystems.Example12.Token
          DomainTheory.NeighbourhoodSystems.Example12.Token DomainTheory.
    NeighbourhoodSystems.Example23.T
          DomainTheory.NeighbourhoodSystems.Example23.T DomainTheory.
    NeighbourhoodSystems.Exercise724.notT))
      DomainTheory.NeighbourhoodSystems.Exercise724.L_isEffectivelyGiven
      DomainTheory.NeighbourhoodSystems.Exercise724.notT_lifted_isComputable)
    DomainTheory.NeighbourhoodSystems.Exercise724.andT_lifted_isComputable)
  DomainTheory.NeighbourhoodSystems.Exercise724.toElement_bijective
end

section
theorem LenumSubsetChar_le_one (t : ℕ) : LenumSubsetChar t ≤ 1 :=
  isPrefixChar_le_one _ _
end

section
theorem Lenum_subset_char_eq_one_iff (n m : ℕ) :
    Lenum n ⊆ Lenum m ↔ LenumSubsetChar (Nat.pair n m) = 1 := by
  unfold LenumSubsetChar
  rw [unpair_pair_fst, unpair_pair_snd, Lenum_subset_iff]
end

section
open DomainTheory.NeighbourhoodSystems.Example12 (Token zero one)

theorem T_isEffectivelyGiven : Example23.T.IsEffectivelyGiven := ⟨Tpres⟩

theorem TeqChar_eq_one_iff (a b : ℕ) : TeqChar a b = 1 ↔ a = b := by
```

```
  unfold TeqChar isZero; omega

end

section

theorem embStr_injective : Function.Injective embStr :=
  List.map_injective_iff.mpr bitToNat_injective
end

section
theorem primrec_LenumSubsetChar : Nat.Primrec LenumSubsetChar :=
  primrec_isPrefixChar_swap.of_eq fun t => by simp only [LenumSubsetChar]
end

section

theorem Lenum_subset_recDecidable : RecDecidable₂ (fun n m => Lenum n ⊆ Lenum m) :=
  RecDecidable₂.of_paired_zero_one_char primrec_LenumSubsetChar
    (fun t => by have := LenumSubsetChar_le_one t; omega)
    Lenum_subset_char_eq_one_iff
end

end DomainTheory.NeighbourhoodSystems.Exercise724
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap

section
variable {α : Type*} {V : NeighborhoodSystem α}

def codePair (a b : ℕ) : ℕ := Nat.pair (Nat.pair a b) 0 + 1
end

section
variable {α : Type*} {V : NeighborhoodSystem α}
variable (P : ComputablePresentation V)

def chainDec (fincl : ℕ → ℕ) (c : ℕ) : ℕ → List ℕ → Prop
  | _, [] => True
  | a, (b :: rest) => fincl (Nat.pair c (codePair a b)) = 1 ∧ chainDec fincl c b rest

def fixPStep (fincl : ℕ → ℕ) (c acc x : ℕ) : ℕ :=
  Nat.pair x (selectFn acc.unpair.2 (isOne (fincl (Nat.pair c (codePair acc.unpair.1 x
    )))) 0)

def fixStp (fincl : ℕ → ℕ) (w : ℕ) : ℕ :=
  Nat.pair w.unpair.1
    (selectFn w.unpair.2.unpair.1.unpair.2
      (isOne (fincl (Nat.pair w.unpair.2.unpair.2
        (codePair w.unpair.2.unpair.1.unpair.1 w.unpair.1)))) 0)

def fixChainChar (fincl : ℕ → ℕ) (c i : ℕ) : ℕ :=
  foldCode (fixStp fincl) c (Nat.pair P.masterIdx 1) i

end
```

```
section
variable {α : Type*} {V : NeighborhoodSystem α}

def gLastOf : ℕ → List ℕ → ℕ
  | a, [] => a
  | _, (b :: rest) => gLastOf b rest

def gStepsOK (g : ApproximableMap V V) (P : ComputablePresentation V) : ℕ → List ℕ →
    Prop
  | _, [] => True
  | a, (b :: rest) => g.rel (P.X a) (P.X b) ∧ gStepsOK g P b rest

end

section
variable {α : Type*} {V : NeighborhoodSystem α}
variable (P : ComputablePresentation V)

theorem Xenum_codePair (gN : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P P (decodeList c))
      : Set (ApproximableMap V V)).Nonempty) (a b : ℕ) :
    Xenum P P gN (codePair a b) = step (P.X a) (P.X b) :=
  Xenum_singleton P P gN hgN a b

theorem fixPStep_foldl_fst (fincl : ℕ → ℕ) (c : ℕ) :
    ∀ (full : List ℕ) (prev fl : ℕ),
      (List.foldl (fixPStep fincl c) (Nat.pair prev fl) full).unpair.1 = gLastOf prev
    full := by
  intro full
  induction full with
  | nil =>
    intro prev fl
    show (Nat.pair prev fl).unpair.1 = prev
    exact unpair_pair_fst prev fl
  | cons b rest ih =>
    intro prev fl
    rw [List.foldl_cons]
    have hstep : fixPStep fincl c (Nat.pair prev fl) b
        = Nat.pair b (selectFn fl (isOne (fincl (Nat.pair c (codePair prev b)))) 0) :=
     by
      unfold fixPStep; simp only [unpair_pair_fst, unpair_pair_snd]
    rw [hstep, ih b (selectFn fl (isOne (fincl (Nat.pair c (codePair prev b)))) 0)]
    rfl

theorem fixPStep_foldl_snd (fincl : ℕ → ℕ) (c : ℕ) :
    ∀ (full : List ℕ) (prev fl : ℕ), fl ≤ 1 →
      ((List.foldl (fixPStep fincl c) (Nat.pair prev fl) full).unpair.2 = 1 ↔
        fl = 1 ∧ chainDec fincl c prev full) := by
  intro full
  induction full with
  | nil =>
    intro prev fl _
    show (Nat.pair prev fl).unpair.2 = 1 ↔ fl = 1 ∧ chainDec fincl c prev []
    rw [unpair_pair_snd]
    simp [chainDec]
  | cons b rest ih =>
```

```
    intro prev fl _
    rw [List.foldl_cons]
    have hstep : fixPStep fincl c (Nat.pair prev fl) b
        = Nat.pair b (selectFn fl (isOne (fincl (Nat.pair c (codePair prev b)))) 0) :=
     by
      unfold fixPStep; simp only [unpair_pair_fst, unpair_pair_snd]
    rw [hstep]
    set nf := selectFn fl (isOne (fincl (Nat.pair c (codePair prev b)))) 0 with hnf
    have hnfle : nf ≤ 1 := by
      rw [hnf]
      rcases (show fl = 0 ∨ fl = 1 by omega) with h | h <;> rw [h]
      · rw [selectFn_zero]; exact Nat.zero_le 1
      · rw [selectFn_one]; exact isOne_le_one _
    rw [ih b nf hnfle]
    have hnf1 : nf = 1 ↔ (fl = 1 ∧ fincl (Nat.pair c (codePair prev b)) = 1) := by
      rw [hnf]
      rcases (show fl = 0 ∨ fl = 1 by omega) with h | h <;> rw [h]
      · rw [selectFn_zero]; simp
      · rw [selectFn_one, isOne_eq_one_iff]; simp
    rw [hnf1]
    constructor
    · rintro ⟨⟨hfl1, hfincl1⟩, hrest⟩; exact ⟨hfl1, hfincl1, hrest⟩
    · rintro ⟨hfl1, hfincl1, hrest⟩; exact ⟨⟨hfl1, hfincl1⟩, hrest⟩

theorem fixStp_eq (fincl : ℕ → ℕ) (c acc x : ℕ) :
    fixStp fincl (Nat.pair x (Nat.pair acc c)) = fixPStep fincl c acc x := by
  unfold fixStp fixPStep
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem fixChainChar_eq (fincl : ℕ → ℕ) (c i : ℕ) :
    fixChainChar P fincl c i
      = List.foldl (fixPStep fincl c) (Nat.pair P.masterIdx 1) (decodeList i) := by
  unfold fixChainChar
  rw [foldCode_eq']
  have hstep : (fun acc x => fixStp fincl (Nat.pair x (Nat.pair acc c))) = fixPStep
    fincl c := by
    funext acc x; exact fixStp_eq fincl c acc x
  rw [hstep]

theorem fixChainChar_spec (fincl : ℕ → ℕ) (c i : ℕ) :
    (fixChainChar P fincl c i).unpair.1 = gLastOf P.masterIdx (decodeList i)
  ∧ ((fixChainChar P fincl c i).unpair.2 = 1 ↔ chainDec fincl c P.masterIdx (
    decodeList i)) := by
  rw [fixChainChar_eq]
  refine ⟨fixPStep_foldl_fst fincl c (decodeList i) P.masterIdx 1, ?_⟩
  rw [fixPStep_foldl_snd fincl c (decodeList i) P.masterIdx 1 (le_refl 1)]
  simp

end

section
variable {α : Type*} {V : NeighborhoodSystem α}

theorem gStepsOK_complete (g : ApproximableMap V V) (P : ComputablePresentation V) :
    ∀ (n a ? : ℕ), (g.iterMap n).rel (P.X a) (P.X ?) →
      ∃ full, gStepsOK g P a full ∧ P.X (gLastOf a full) ⊆ P.X ? := by
```

```
  intro n
  induction n with
  | zero =>
    intro a ? h
    rw [iterMap_zero, idMap_rel] at h
    exact ⟨[], trivial, h.2.2⟩
  | succ n ih =>
    intro a ? h
    have hcomm : g.iterMap (n + 1) = (g.iterMap n).comp g := by
      rw [iterMap_succ]; exact iter_comm g n
    rw [hcomm, comp_rel] at h
    obtain ⟨Y, h1, h2⟩ := h
    obtain ⟨k, hk⟩ := P.surj (g.rel_cod h1)
    rw [← hk] at h1 h2
    obtain ⟨full', hs', hl'⟩ := ih k ? h2
    exact ⟨k :: full', ⟨h1, hs'⟩, hl'⟩

theorem gStepsOK_sound (g : ApproximableMap V V) (P : ComputablePresentation V) :
    ∀ (full : List ℕ) (a : ℕ), gStepsOK g P a full →
      (g.iterMap full.length).rel (P.X a) (P.X (gLastOf a full)) := by
  intro full
  induction full with
  | nil =>
    intro a _
    show (g.iterMap ([] : List ℕ).length).rel (P.X a) (P.X a)
    rw [List.length_nil, iterMap_zero]
    exact idMap_rel.mpr ⟨P.mem_X a, P.mem_X a, subset_rfl⟩
  | cons b rest ih =>
    intro a hsteps
    obtain ⟨h1, hrest⟩ := hsteps
    have hcomm : g.iterMap (rest.length + 1) = (g.iterMap rest.length).comp g := by
      rw [iterMap_succ]; exact iter_comm g rest.length
    show (g.iterMap (b :: rest).length).rel (P.X a) (P.X (gLastOf b rest))
    rw [List.length_cons, hcomm, comp_rel]
    exact ⟨P.X b, h1, ih b hrest⟩

theorem fixElement_mem_iff_chain (g : ApproximableMap V V) (P : ComputablePresentation
    V)
    (a0 : ℕ) (ha0 : P.X a0 = V.master) (? : ℕ) :
    g.fixElement.mem (P.X ?) ↔
      ∃ full, gStepsOK g P a0 full ∧ P.X (gLastOf a0 full) ⊆ P.X ? := by
  rw [mem_fixElement]
  constructor
  · rintro ⟨n, hn⟩
    rw [← ha0] at hn
    exact gStepsOK_complete g P n a0 ? hn
  · rintro ⟨full, hsteps, hlast⟩
    refine ⟨full.length, ?_⟩
    have hsound := gStepsOK_sound g P full a0 hsteps
    have hmono := (g.iterMap full.length).mono hsound subset_rfl hlast (P.mem_X a0) (P
    .mem_X ?)
    rwa [ha0] at hmono

end

section
```

```
variable {α : Type*} {V : NeighborhoodSystem α}
variable (P : ComputablePresentation V)

theorem fixMap_rel_iff (gN : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P P (decodeList c))
      : Set (ApproximableMap V V)).Nonempty) (c ? : ℕ) :
    (fixMap V).rel (Xenum P P gN c) (P.X ?) ↔
      ∃ full : List ℕ,
        gStepsOK (toApproxMap ((funSpace V V).principal (Xenum_mem P P gN hgN c))) P P
    .masterIdx full
        ∧ P.X (gLastOf P.masterIdx full) ⊆ P.X ? := by
  rw [(fixMap V).rel_iff_mem_principal (Xenum_mem P P gN hgN c), fixMap_toElementMap]
  exact fixElement_mem_iff_chain _ P P.masterIdx P.masterIdx_spec ?

theorem leastMap_Xenum_rel (gN : ℕ → ℕ)
    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P P (decodeList c))
      : Set (ApproximableMap V V)).Nonempty) (c a b : ℕ) :
    (toApproxMap ((funSpace V V).principal (Xenum_mem P P gN hgN c))).rel (P.X a) (P.X
    b)
      ↔ Xenum P P gN c ⊆ step (P.X a) (P.X b) := by
  rw [toApproxMap_rel, mem_principal]
  exact ⟨fun h => h.2, fun h => ⟨step_mem (P.mem_X a) (P.mem_X b), h⟩⟩

theorem chainDec_iff_gStepsOK (gN : ℕ → ℕ)

    (hgN : ∀ c, gN c = 1 ↔ (stepFun (funListOf P P (decodeList c))
      : Set (ApproximableMap V V)).Nonempty) (fincl : ℕ → ℕ)
    (hfincl : ∀ s, fincl s = 1 ↔ Xenum P P gN s.unpair.1 ⊆ Xenum P P gN s.unpair.2) (
    c : ℕ) :
    ∀ (full : List ℕ) (a : ℕ),
      chainDec fincl c a full ↔
        gStepsOK (toApproxMap ((funSpace V V).principal (Xenum_mem P P gN hgN c))) P a
     full := by
  intro full
  induction full with
  | nil => intro a; exact Iff.rfl
  | cons b rest ih =>
    intro a
    constructor
    · rintro ⟨hstep, hrest⟩
      refine ⟨?_, (ih b).mp hrest⟩
      rw [hfincl, unpair_pair_fst, unpair_pair_snd, Xenum_codePair P gN hgN a b] at
    hstep
      exact (leastMap_Xenum_rel P gN hgN c a b).mpr hstep
    · rintro ⟨hstep, hrest⟩
      refine ⟨?_, (ih b).mpr hrest⟩
      have hsub : Xenum P P gN c ⊆ step (P.X a) (P.X b) :=
        (leastMap_Xenum_rel P gN hgN c a b).mp hstep
      rw [hfincl, unpair_pair_fst, unpair_pair_snd, Xenum_codePair P gN hgN a b]
      exact hsub

theorem primrec_fixStp (fincl : ℕ → ℕ) (hfinclp : Nat.Primrec fincl) :
    Nat.Primrec (fixStp fincl) := by
  have hx : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
```

```
  have hprev : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1.unpair.1) :=
    Nat.Primrec.left.comp (Nat.Primrec.left.comp Nat.Primrec.right)
  have hflag : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1.unpair.2) :=
    Nat.Primrec.right.comp (Nat.Primrec.left.comp Nat.Primrec.right)
  have hcode : Nat.Primrec (fun w : ℕ => codePair w.unpair.2.unpair.1.unpair.1 w.
    unpair.1) :=
    Nat.Primrec.succ.comp ((hprev.pair hx).pair (Nat.Primrec.const 0))
  have hinner : Nat.Primrec (fun w => Nat.pair w.unpair.2.unpair.2
      (codePair w.unpair.2.unpair.1.unpair.1 w.unpair.1)) := hc.pair hcode
  have hsel : Nat.Primrec (fun w => selectFn w.unpair.2.unpair.1.unpair.2
      (isOne (fincl (Nat.pair w.unpair.2.unpair.2
        (codePair w.unpair.2.unpair.1.unpair.1 w.unpair.1)))) 0) :=
    primrec_selectFn hflag (primrec_isOne.comp (hfinclp.comp hinner)) (Nat.Primrec.
    const 0)
  exact (hx.pair hsel).of_eq (fun _ => rfl)

theorem primrec_fixChainChar (fincl : ℕ → ℕ) (hfinclp : Nat.Primrec fincl) :
    Nat.Primrec (fun t => fixChainChar P fincl t.unpair.1 t.unpair.2) :=
  (primrec_foldCode (primrec_fixStp fincl hfinclp) Nat.Primrec.left
    (Nat.Primrec.const (Nat.pair P.masterIdx 1)) Nat.Primrec.right).of_eq (fun _ =>
    rfl)

end
end DomainTheory.NeighbourhoodSystems
end
```

3.9 Retracts of the universal domain

Dependency diagram. Each box is one item. The arrowhead is on the item that imports. An arrow already implied by a longer path is left out. The introduction has no Lean file, so it is not shown. Blue is a definition, green a proposition, amber an example, red a theorem, and indigo an exercise.

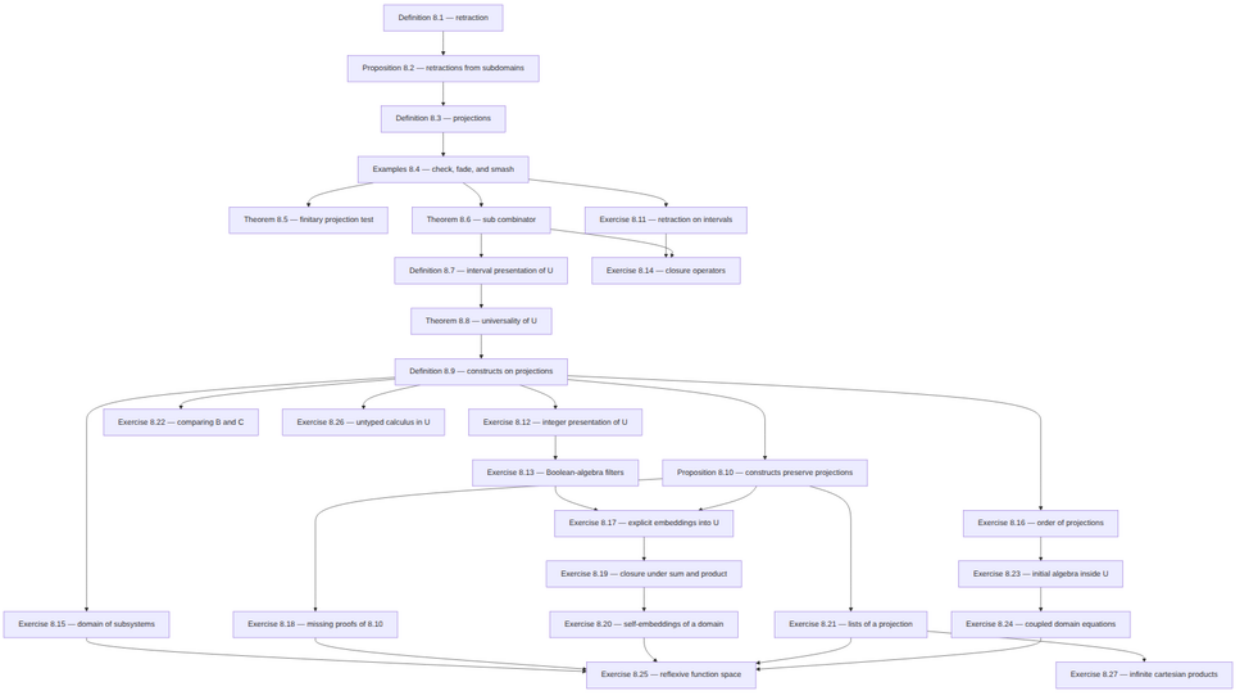

Figure 46: Retracts of the universal domain.

3.9.1 Introduction

LECTURE VIII RETRACTS OF THE UNIVERSAL DOMAIN

In order to be able to have a fully flexible method of solving domain equations and to be able to see why the domains obtained are effectively given, we shall embed all the desired domains in one "largest" domain. This universal domain will be easily shown to be effectively given, and the mappings needed to extract the other domains will be found to be computable. In order to be able to carry out this programme, we investigate first how certain subdomains correspond to mappings — the so-called *retracts*. An advantage of this analysis is that all the necessary definitions can be written out in λ-calculus notation, thus demonstrating the power of our mathematical programming language.

3.9.2 Definition 8.1 — retraction

DEFINITION 8.1. A retraction of a given domain E is an approximable mapping $a : E \to E$ such that $a \circ a = a$. □

Definition_8_1.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Lemma_6_15

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section
```

```
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
variable {α : Type*} {E : NeighborhoodSystem α}

class Retraction (a : ApproximableMap E E) : Prop where
  out : a.comp a = a

@[simp] theorem isRetraction_idMap : Retraction (idMap E) :=
  ⟨idMap_comp (idMap E)⟩

end

section
open NeighborhoodSystem ApproximableMap
variable {α : Type*} {D E : NeighborhoodSystem α}

namespace Subsystem

def retractionOfSubsystem (h : D ? E) : ApproximableMap E E := h.inj.comp h.proj

@[simp] theorem retractionOfSubsystem_rel (h : D ? E) {X Z : Set α} :
    (retractionOfSubsystem h).rel X Z ↔ E.mem X ∧ E.mem Z ∧ ∃ Y, D.mem Y ∧ X ⊆ Y ∧ Y
    ⊆ Z := by
  simp only [retractionOfSubsystem, comp_rel, inj_rel, proj_rel]
  constructor
  · rintro ⟨Y, ⟨hEX, hDY, hXY⟩, hDY', hEZ, hYZ⟩
    exact ⟨hEX, hEZ, Y, hDY, hXY, hYZ⟩
  · rintro ⟨hEX, hEZ, Y, hDY, hXY, hYZ⟩
    exact ⟨Y, ⟨hEX, hDY, hXY⟩, hDY, hEZ, hYZ⟩

theorem retractionOfSubsystem_toElementMap_inj (h : D ? E) (x : D.Element) :
    (retractionOfSubsystem h).toElementMap (h.inj.toElementMap x) = h.inj.toElementMap
     x := by
  have h1 : (retractionOfSubsystem h).toElementMap (h.inj.toElementMap x)
      = h.inj.toElementMap (h.proj.toElementMap (h.inj.toElementMap x)) :=
    toElementMap_comp h.inj h.proj (h.inj.toElementMap x)
  have h2 : h.proj.toElementMap (h.inj.toElementMap x) = (h.proj.comp h.inj).
    toElementMap x :=
    (toElementMap_comp h.proj h.inj x).symm
  rw [h1, h2, h.proj_comp_inj, toElementMap_idMap]

def elementIso (h : D ? E) :
    D.Element ≃o {y : E.Element // (retractionOfSubsystem h).toElementMap y = y} where
  toFun x := ⟨h.inj.toElementMap x, retractionOfSubsystem_toElementMap_inj h x⟩
  invFun y := h.proj.toElementMap y.1
  left_inv x := by
    have h1 : h.proj.toElementMap (h.inj.toElementMap x) = (h.proj.comp h.inj).
    toElementMap x :=
      (toElementMap_comp h.proj h.inj x).symm
    show h.proj.toElementMap (h.inj.toElementMap x) = x
    rw [h1, h.proj_comp_inj, toElementMap_idMap]
  right_inv y := by
    apply Subtype.ext
    have hfix : (h.inj.comp h.proj).toElementMap y.1 = y.1 := y.2
    have h1 : (h.inj.comp h.proj).toElementMap y.1 = h.inj.toElementMap (h.proj.
```

```
    toElementMap y.1) :=
      toElementMap_comp h.inj h.proj y.1
    show h.inj.toElementMap (h.proj.toElementMap y.1) = y.1
    rw [← h1]; exact hfix
  map_rel_iff' := by
    intro x x'
    show h.inj.toElementMap x ≤ h.inj.toElementMap x' ↔ x ≤ x'
    constructor
    · intro hle
      have hmono := h.proj.toElementMap_mono hle
      have h1 : h.proj.toElementMap (h.inj.toElementMap x) = (h.proj.comp h.inj).
    toElementMap x :=
        (toElementMap_comp h.proj h.inj x).symm
      have h2 : h.proj.toElementMap (h.inj.toElementMap x') = (h.proj.comp h.inj).
    toElementMap x' :=
        (toElementMap_comp h.proj h.inj x').symm
      rw [h1, h2, h.proj_comp_inj, toElementMap_idMap, toElementMap_idMap] at hmono
      exact hmono
    · intro hle
      exact h.inj.toElementMap_mono hle

theorem isRetraction_retractionOfSubsystem (h : D ? E) :
    Retraction (retractionOfSubsystem h) := by
  constructor
  show (h.inj.comp h.proj).comp (h.inj.comp h.proj) = h.inj.comp h.proj
  rw [comp_assoc, ← comp_assoc h.proj h.inj h.proj, h.proj_comp_inj, idMap_comp]

end Subsystem
end
end DomainTheory.NeighbourhoodSystems
```

3.9.3 Proposition 8.2 — retractions from subdomains

PROPOSITION 8.2. If $D \triangleleft E$ and if $a : E \to E$ is defined by

$$X\ a\ Z \quad \text{iff} \quad \exists Y \in D.\ X \subseteq Y \subseteq Z$$

for all $X, Z \in E$, then a is a retraction and $|D|$ is isomorphic to the fixed-point set of a, the set $\{y \in |E| \mid a(y) = y\}$, under inclusion.

Proof: That a is an approximable mapping is a direct consequence of Definition 6.10. Indeed, in the notation of Proposition 6.12, we have

$$a = i \circ j,$$

and this is another proof that a is approximable. This remark is also convenient, since we know from 6.10

$$j \circ i = I_D.$$

Therefore, we find:

$$a \circ a = i \circ j \circ i \circ j = i \circ j = a;$$

and so a is a retraction.

We can also employ i and j to give the isomorphism on $|D|$. If $x \in |D|$, then $i(x) \in |E|$ and we calculate:

$$a(i(x)) = i \circ j \circ i(x) = i(x).$$

Thus, $i(x)$ belongs to the fixed-point set of a. In the other direction, if $a(y) = y$, then $i(j(y)) = y$. But $j(y) \in |D|$, so i maps $|D|$ one-one and onto the fixed-point set of a. As i and j are monotone, the map is an isomorphism with respect to $\sqsubseteq$. $\square$

Not every retraction comes from a relationship like $D \triangleleft E$; in fact, we can see from the definition of a above that $a \sqsubseteq 1_E$. But, as is indicated in Exercise 8.11, even this condition is not sufficient to characterize the kind of retractions provided by 8.2. The characterization is as follows.

Proposition_8_2.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_1

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
variable {α : Type*} {D E : NeighborhoodSystem α}
namespace Subsystem

theorem retraction_of_subsystem (h : D ? E) :
    Retraction (retractionOfSubsystem h) ∧
      Nonempty (D.Element ≃o {y : E.Element // (retractionOfSubsystem h).toElementMap
    y = y}) :=
  ⟨isRetraction_retractionOfSubsystem h, ⟨elementIso h⟩⟩

end Subsystem
end

end DomainTheory.NeighbourhoodSystems
namespace DomainTheory.NeighbourhoodSystems.Subsystem
set_option linter.unusedVariables false

theorem theorem_82.{u_1} : And
  (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (h : @DomainTheory.NeighbourhoodSystems.Subsystem α D E),
    @DomainTheory.NeighbourhoodSystems.Retraction α E
      (@DomainTheory.NeighbourhoodSystems.Subsystem.retractionOfSubsystem α D E h))
  (∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (h : @DomainTheory.NeighbourhoodSystems.Subsystem α D E),
    And
      (@DomainTheory.NeighbourhoodSystems.Retraction α E
        (@DomainTheory.NeighbourhoodSystems.Subsystem.retractionOfSubsystem α D E h))
      (Nonempty
        (@OrderIso (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
          (@Subtype (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E
    )
```

```
          fun (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E
  ) =>
          @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E E
              (@DomainTheory.NeighbourhoodSystems.Subsystem.retractionOfSubsystem α
  D E h) y)
            y)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α D)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α D)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α D)))
        (@Subtype.instLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α E)
          (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α E)
            (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α E)
              (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α E)))
          fun (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E
  ) =>
          @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E E
              (@DomainTheory.NeighbourhoodSystems.Subsystem.retractionOfSubsystem α
  D E h) y)
            y)))) :=
@And.intro
(∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (h : @DomainTheory.NeighbourhoodSystems.Subsystem α D E),
  @DomainTheory.NeighbourhoodSystems.Retraction α E
    (@DomainTheory.NeighbourhoodSystems.Subsystem.retractionOfSubsystem α D E h))
(∀ {α : Type u_1} {D E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (h : @DomainTheory.NeighbourhoodSystems.Subsystem α D E),
  And
    (@DomainTheory.NeighbourhoodSystems.Retraction α E
      (@DomainTheory.NeighbourhoodSystems.Subsystem.retractionOfSubsystem α D E h))
    (Nonempty
      (@OrderIso (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α D)
        (@Subtype (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E
  )
          fun (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E
  ) =>
          @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E E
              (@DomainTheory.NeighbourhoodSystems.Subsystem.retractionOfSubsystem α
  D E h) y)
            y)
        (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  Element α D)
          (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
  NeighborhoodSystem.Element α D)
            (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
  instPartialOrderElement α D)))
        (@Subtype.instLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
```

```
    Element α E)
            (@Preorder.toLE (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    Element α E)
              (@PartialOrder.toPreorder (@DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem.Element α E)
                (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.
    instPartialOrderElement α E)))
            fun (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E
    ) =>
            @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
              (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E E
                (@DomainTheory.NeighbourhoodSystems.Subsystem.retractionOfSubsystem α
    D E h) y)
              y))))
  @DomainTheory.NeighbourhoodSystems.Subsystem.isRetraction_retractionOfSubsystem
  @DomainTheory.NeighbourhoodSystems.Subsystem.retraction_of_subsystem

end DomainTheory.NeighbourhoodSystems.Subsystem
namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
universe u
variable {α : Type u} {D E : NeighborhoodSystem α}

def IsFinitary (a : ApproximableMap E E) : Prop :=
  ∃ (β : Type u) (F : NeighborhoodSystem β),
    Nonempty ({y : E.Element // a.toElementMap y = y} ≃o F.Element)

end
end DomainTheory.NeighbourhoodSystems
```

3.9.4 Definition 8.3 — projections

DEFINITION 8.3. A retraction $a : E \to E$ is called a *projection* provided

$$a \sqsubseteq 1_E;$$

it is *finitary* iff its fixed-point set is isomorphic to a domain. □

Definition_8_3.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Proposition_8_2

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
universe u
variable {α : Type u} {D E : NeighborhoodSystem α}
```

```
def IsProjection (a : ApproximableMap E E) : Prop := Retraction a ∧ a ≤ idMap E

class FinitaryProjection (a : ApproximableMap E E) : Prop where
  out : IsProjection a ∧ IsFinitary a

end

section
open NeighborhoodSystem ApproximableMap
universe u
variable {α : Type u} {D E : NeighborhoodSystem α}

namespace Subsystem

variable {h : D ? E}

theorem isFinitary_retractionOfSubsystem (h : D ? E) :
    IsFinitary (retractionOfSubsystem h) :=
  ⟨α, D, ⟨(elementIso h).symm⟩⟩

theorem retractionOfSubsystem_le_idMap (h : D ? E) : retractionOfSubsystem h ≤ idMap E
     := by
  intro X Z hr
  obtain ⟨hEX, hEZ, Y, _, hXY, hYZ⟩ := (retractionOfSubsystem_rel h).mp hr
  exact ⟨hEX, hEZ, hXY.trans hYZ⟩

theorem isProjection_retractionOfSubsystem (h : D ? E) :
    IsProjection (retractionOfSubsystem h) :=
  ⟨isRetraction_retractionOfSubsystem h, retractionOfSubsystem_le_idMap h⟩

theorem isFinitaryProjection_retractionOfSubsystem (h : D ? E) :
    FinitaryProjection (retractionOfSubsystem h) :=
  ⟨⟨isProjection_retractionOfSubsystem h, isFinitary_retractionOfSubsystem h⟩⟩

end Subsystem
end

open NeighborhoodSystem ApproximableMap ApproximableMap₂

theorem fin2_zero_ne_zero_one : ({0} : Set (Fin 2)) = ({0, 1} : Set (Fin 2)) := by
  intro h
  have h1 : (1 : Fin 2) ∈ ({0, 1} : Set (Fin 2)) := by simp
  rw [← h] at h1
  simp at h1

theorem fin2_zero_subset_zero_one : ({0} : Set (Fin 2)) ⊆ ({0, 1} : Set (Fin 2)) := by
  intro x hx; simp only [Set.mem_singleton_iff] at hx; subst hx; simp

end DomainTheory.NeighbourhoodSystems
```

3.9.5 Examples 8.4 — check, fade, and smash

EXAMPLES 8.4. If a system D over Δ is not trivial, then the two element system $O = \{\{0\}, \{0, 1\}\}$ comes from a retraction on D. Specifically, define a combinator

$$\mathrm{check} : D \to O$$

by the relation

$$X \text{ check } Y \quad \text{iff either } Y = \{0, 1\} \text{ or } X \neq \Delta.$$

We see $\mathrm{check}(x) = \bot_O$ iff $x = \bot_D$. We leave to the reader the definition of a combinator:

$$\mathrm{fade} : O \times D \to D,$$

where we have for $t \in |O|$ and $x \in |D|$:

$$\begin{aligned} \mathrm{fade}(t, x) &= \bot_D, \text{ if } t = \bot_O; \\ &= x, \text{ if not.} \end{aligned}$$

Now, take any $u \in |D|$ with $u \neq \bot$, and define

$$a(x) = \mathrm{fade}(\mathrm{check}(x), u).$$

Then a is a retraction (not a projection in general) and the range of a is isomorphic to O.

Another way of using these combinators is to find $(D \to_\bot E)$ as a retraction of $(D \to E)$. Specifically, define a combinator

$$\mathrm{strict} : (D \to E) \to (D \to E)$$

by the equation

$$\mathrm{strict}(f) = \lambda x.\ \mathrm{fade}(\mathrm{check}(x), f(x)),$$

where this time

$$\mathrm{fade} : O \times E \to E\ .$$

The range of strict consists exactly of the strict functions and this time strict is a projection whose range is indeed a domain.

Similarly, we can find a projection on $D \times E$ with a range isomorphic to $D \otimes E$ by the combinator such that:

$$\mathrm{smash}(x, y) = \mathrm{fade}(\mathrm{check}(x), \mathrm{fade}(\mathrm{check}(y), \langle x, y \rangle)),$$

for $x \in |D|$ and $y \in |E|$. □

fixedNbhd.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_3

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_9
```

```
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

section
universe u
variable {α : Type u} {E : NeighborhoodSystem α}

abbrev FixSet (a : ApproximableMap E E) := {y : E.Element // a.toElementMap y = y}

def fixedNbhd (a : ApproximableMap E E) : NeighborhoodSystem α where
  mem X := E.mem X ∧ a.rel X X
  master := E.master
  master_nonempty := E.master_nonempty
  master_mem := ⟨E.master_mem, a.master_rel⟩
  inter_mem := by
    rintro X Y Z ⟨hXE, hXa⟩ ⟨hYE, hYa⟩ ⟨hZE, _⟩ hZsub
    have hXYE : E.mem (X ∩ Y) := E.inter_mem hXE hYE hZE hZsub
    have h1 : a.rel (X ∩ Y) X :=
      a.mono hXa Set.inter_subset_left subset_rfl hXYE hXE
    have h2 : a.rel (X ∩ Y) Y :=
      a.mono hYa Set.inter_subset_right subset_rfl hXYE hYE
    exact ⟨hXYE, a.inter_right h1 h2⟩
  sub_master := fun h => E.sub_master h.1

@[simp] theorem fixedNbhd_mem {a : ApproximableMap E E} {X : Set α} :
    (fixedNbhd a).mem X ↔ E.mem X ∧ a.rel X X := Iff.rfl

section Algebraic

variable {? : Type u} {V : NeighborhoodSystem ?}

instance instNonemptyMemSubtype (x : V.Element) : Nonempty {X : Set ? // x.mem X} :=
  ⟨⟨V.master, x.master_mem⟩⟩

def IsCompactElt (x : V.Element) : Prop :=
  ∀ {I : Type u} [Nonempty I] (d : I → V.Element) (hdir : ∀ i j, ∃ k, d i ≤ d k ∧ d j
     ≤ d k),
    x ≤ iSupDirected d hdir → ∃ i, x ≤ d i

theorem principal_le_of_mem {y : V.Element} {Z : Set ?} (hZ : y.mem Z) :
    V.principal (y.sub hZ) ≤ y :=
  fun _ ⟨hW, hZW⟩ => y.up_mem hZ hW hZW

theorem principalFamily_directed (x : V.Element) :
    ∀ i j : {X : Set ? // x.mem X}, ∃ k : {X : Set ? // x.mem X},
      V.principal (x.sub i.2) ≤ V.principal (x.sub k.2) ∧
        V.principal (x.sub j.2) ≤ V.principal (x.sub k.2) :=
  fun i j => ⟨⟨i.1 ∩ j.1, x.inter_mem i.2 j.2⟩,
    (V.principal_le_iff (x.sub i.2) (x.sub (x.inter_mem i.2 j.2))).mpr Set.
    inter_subset_left,
    (V.principal_le_iff (x.sub j.2) (x.sub (x.inter_mem i.2 j.2))).mpr Set.
    inter_subset_right⟩
```

```
theorem eq_iSupDirected_principal (x : V.Element) :
    x = iSupDirected (fun i : {X : Set ? // x.mem X} => V.principal (x.sub i.2))
      (principalFamily_directed x) := by
  apply Element.ext
  intro Z
  rw [mem_iSupDirected]
  constructor
  · intro hZ; exact ⟨⟨Z, hZ⟩, (V.mem_principal _).mpr ⟨x.sub hZ, subset_rfl⟩⟩
  · rintro ⟨⟨X, hX⟩, hZ'⟩
    obtain ⟨hZmem, hXZ⟩ := (V.mem_principal _).mp hZ'
    exact x.up_mem hX hZmem hXZ

theorem eq_principal_of_isCompactElt {x : V.Element} (hx : IsCompactElt x) :
    ∃ (X : Set ?) (hX : V.mem X), x = V.principal hX := by
  have hle : x ≤ iSupDirected (fun i : {X : Set ? // x.mem X} => V.principal (x.sub i
    .2))
      (principalFamily_directed x) := le_of_eq (eq_iSupDirected_principal x)
  obtain ⟨i0, hi0⟩ :=
    hx (fun i : {X : Set ? // x.mem X} => V.principal (x.sub i.2)) (
    principalFamily_directed x) hle
  exact ⟨i0.1, x.sub i0.2, le_antisymm hi0 (principal_le_of_mem i0.2)⟩

theorem principal_compact {X : Set ?} (hX : V.mem X) {I : Type*} [Nonempty I]
    (d : I → V.Element) (hdir : ∀ i j, ∃ k, d i ≤ d k ∧ d j ≤ d k)
    (h : V.principal hX ≤ iSupDirected d hdir) : ∃ i, V.principal hX ≤ d i := by
  obtain ⟨i, hi⟩ := (mem_iSupDirected d hdir).mp (h X ⟨hX, subset_rfl⟩)
  exact ⟨i, fun _ ⟨hW, hXW⟩ => (d i).up_mem hi hW hXW⟩

theorem principal_isCompactElt {X : Set ?} (hX : V.mem X) : IsCompactElt (V.principal
    hX) :=
  fun d hdir h => principal_compact hX d hdir h

end Algebraic

theorem fixedNbhd_subsystem (a : ApproximableMap E E) : fixedNbhd a ? E where
  master_eq := rfl
  sub := fun h => h.1
  inter_closed := by
    rintro X Y ⟨hXE, hXa⟩ ⟨hYE, hYa⟩ hEXY
    have h1 : a.rel (X ∩ Y) X := a.mono hXa Set.inter_subset_left subset_rfl hEXY hXE
    have h2 : a.rel (X ∩ Y) Y := a.mono hYa Set.inter_subset_right subset_rfl hEXY hYE
    exact ⟨hEXY, a.inter_right h1 h2⟩

theorem mem_of_exists_rel_self {a : ApproximableMap E E} (x : E.Element) {Y : Set α}
    (hYE : E.mem Y) {X : Set α} (hXx : x.mem X) (hXY : X ⊆ Y) (hXaX : a.rel X X) :
    (a.toElementMap x).mem Y := by
  have hX : E.mem X := a.rel_dom hXaX
  have hmem : (a.toElementMap (E.principal hX)).mem X := (a.rel_iff_mem_principal hX).
    mp hXaX
  have hle : E.principal hX ≤ x := principal_le_of_mem hXx
  have hXmem : (a.toElementMap x).mem X := (a.toElementMap_mono hle) X hmem
  exact (a.toElementMap x).up_mem hXmem hYE hXY

theorem isFinitaryProjection_of_formula (a : ApproximableMap E E)
    (hii : ∀ (x : E.Element) {Y : Set α}, (a.toElementMap x).mem Y ↔
```

```
      E.mem Y ∧ ∃ X, x.mem X ∧ X ⊆ Y ∧ a.rel X X) :
    FinitaryProjection a := by
  have heq : a = Subsystem.retractionOfSubsystem (fixedNbhd_subsystem a) := by
    apply ApproximableMap.ext
    intro X Z
    rw [Subsystem.retractionOfSubsystem_rel]
    constructor
    · intro hr
      have hX : E.mem X := a.rel_dom hr
      have hmem : (a.toElementMap (E.principal hX)).mem Z := (a.rel_iff_mem_principal
    hX).mp hr
      obtain ⟨hZE, Y, hXY, hYZ, hYa⟩ := hii (E.principal hX) |>.mp hmem
      exact ⟨hX, hZE, Y, ⟨a.rel_dom hYa, hYa⟩, (E.mem_principal hX).mp hXY |>.2, hYZ⟩
    · rintro ⟨hX, hZ, Y, ⟨_, hYa⟩, hXY, hYZ⟩
      exact (a.rel_iff_mem_principal hX).mpr
        (mem_of_exists_rel_self (E.principal hX) hZ (E.mem_principal hX |>.mpr ⟨a.
    rel_dom hYa, hXY⟩))
          hYZ hYa)
  rw [heq]
  exact Subsystem.isFinitaryProjection_retractionOfSubsystem (fixedNbhd_subsystem a)

section HardDirection

variable {a : ApproximableMap E E}

variable {β : Type u} {F : NeighborhoodSystem β} (e : FixSet a ≃o F.Element)

def sectionMap : ApproximableMap F E :=
  ofMono (fun _X hX => (e.symm (F.principal hX)).1) (fun _ _ hX hX' hXX' =>
    e.symm.monotone ((F.principal_le_iff hX hX').mpr hXX'))

theorem toElementMap_iSupDirected_fixed {I : Type u} [Nonempty I] (d : I → E.Element)
    (hdir : ∀ i j, ∃ k, d i ≤ d k ∧ d j ≤ d k) (hfix : ∀ i, a.toElementMap (d i) = d i
    ) :
    a.toElementMap (iSupDirected d hdir) = iSupDirected d hdir := by
  rw [toElementMap_iSupDirected]
  apply Element.ext
  intro Z
  rw [mem_iSupDirected, mem_iSupDirected]
  simp_rw [hfix]

@[simp] theorem toElementMap_sectionMap_principal {X : Set β} (hX : F.mem X) :
    (sectionMap e).toElementMap (F.principal hX) = (e.symm (F.principal hX)).1 :=
  toElementMap_ofMono_principal _ _ X hX

theorem toElementMap_sectionMap (w' : F.Element) :
    (sectionMap e).toElementMap w' = (e.symm w').1 := by
  have hdirC : ∀ i j : {X : Set β // w'.mem X}, ∃ k : {X : Set β // w'.mem X},
      (e.symm (F.principal (w'.sub i.2))).1 ≤ (e.symm (F.principal (w'.sub k.2))).1 ∧
        (e.symm (F.principal (w'.sub j.2))).1 ≤ (e.symm (F.principal (w'.sub k.2))).1
    :=
    fun i j => ⟨⟨i.1 ∩ j.1, w'.inter_mem i.2 j.2⟩,
      e.symm.monotone ((F.principal_le_iff (w'.sub i.2) (w'.sub (w'.inter_mem i.2 j.2)
    )).mpr
        Set.inter_subset_left),
      e.symm.monotone ((F.principal_le_iff (w'.sub j.2) (w'.sub (w'.inter_mem i.2 j.2)
```

```
    )).mpr
        Set.inter_subset_right)⟩
  have hS_eq : (sectionMap e).toElementMap w' =
      iSupDirected (fun i : {X : Set β // w'.mem X} => (e.symm (F.principal (w'.sub i
    .2))).1)
        hdirC := by
    apply Element.ext
    intro Z
    rw [toElementMap_mem_iff_principal, mem_iSupDirected]
    constructor
    · rintro ⟨X, hX, hZ⟩; rw [toElementMap_sectionMap_principal] at hZ; exact ⟨⟨X, hX⟩,
    hZ⟩
    · rintro ⟨⟨X, hX⟩, hZ⟩; exact ⟨X, hX, by rwa [toElementMap_sectionMap_principal]⟩
  have hfixC : ∀ i : {X : Set β // w'.mem X},
      a.toElementMap (e.symm (F.principal (w'.sub i.2))).1 =
        (e.symm (F.principal (w'.sub i.2))).1 :=
    fun i => (e.symm (F.principal (w'.sub i.2))).2
  apply le_antisymm
  · rw [hS_eq]
    apply iSupDirected_le
    intro i
    exact e.symm.monotone (principal_le_of_mem i.2)
  · have hSfix : a.toElementMap ((sectionMap e).toElementMap w') =
        (sectionMap e).toElementMap w' := by
      rw [hS_eq]; exact toElementMap_iSupDirected_fixed _ hdirC hfixC
    have key : w' ≤ e ⟨(sectionMap e).toElementMap w', hSfix⟩ := by
      refine le_trans (le_of_eq (eq_iSupDirected_principal w'))
        (iSupDirected_le _ (principalFamily_directed w') ?_)
      intro i
      have : e.symm (F.principal (w'.sub i.2)) ≤ ⟨(sectionMap e).toElementMap w',
    hSfix⟩ := by
        show (e.symm (F.principal (w'.sub i.2))).1 ≤ (sectionMap e).toElementMap w'
        rw [hS_eq]
        exact le_iSupDirected _ hdirC i
      have := e.monotone this
      rwa [e.apply_symm_apply] at this
    have := e.symm.monotone key
    rwa [e.symm_apply_apply] at this

theorem e_apply_iSupDirected_fixed {I : Type u} [Nonempty I] (d : I → E.Element)
    (hdir : ∀ i j, ∃ k, d i ≤ d k ∧ d j ≤ d k) (hfix : ∀ i, a.toElementMap (d i) = d i
    )
    (hSfix : a.toElementMap (iSupDirected d hdir) = iSupDirected d hdir)
    (hdir' : ∀ i j : I, ∃ k, e ⟨d i, hfix i⟩ ≤ e ⟨d k, hfix k⟩ ∧
      e ⟨d j, hfix j⟩ ≤ e ⟨d k, hfix k⟩) :
    e ⟨iSupDirected d hdir, hSfix⟩ = iSupDirected (fun i => e ⟨d i, hfix i⟩) hdir' := by
  apply le_antisymm
  · have hstep : (⟨iSupDirected d hdir, hSfix⟩ : FixSet a) ≤
        e.symm (iSupDirected (fun i => e ⟨d i, hfix i⟩) hdir') := by
      show iSupDirected d hdir ≤ _
      apply iSupDirected_le
      intro i
      show d i ≤ _
      have hle : e ⟨d i, hfix i⟩ ≤ iSupDirected (fun i => e ⟨d i, hfix i⟩) hdir' :=
        le_iSupDirected (fun i => e ⟨d i, hfix i⟩) hdir' i
      have := e.symm.monotone hle
```

```
      rwa [e.symm_apply_apply] at this
    have := e.monotone hstep
    rwa [e.apply_symm_apply] at this
  · apply iSupDirected_le
    intro i
    exact e.monotone (le_iSupDirected d hdir i)

theorem toElementMap_idem {a : ApproximableMap E E} (ha : Retraction a) (z : E.Element
    ) :
    a.toElementMap (a.toElementMap z) = a.toElementMap z := by
  rw [← toElementMap_comp a a z, ha.out]

theorem exists_principal_eq_of_isRetraction_le_idMap (ha_ret : Retraction a)
    (ha_proj : a ≤ idMap E) {Y : Set β} (hY : F.mem Y) :
    ∃ (X : Set α) (hX : E.mem X), (e.symm (F.principal hY)).1 = E.principal hX := by
  apply eq_principal_of_isCompactElt
  intro I _ d hdir hle
  set d2 : I → E.Element := fun i => a.toElementMap (d i) with hd2
  have hdir2 : ∀ i j, ∃ k, d2 i ≤ d2 k ∧ d2 j ≤ d2 k := fun i j => by
    obtain ⟨k, hik, hjk⟩ := hdir i j
    exact ⟨k, a.toElementMap_mono hik, a.toElementMap_mono hjk⟩
  have hfix2 : ∀ i, a.toElementMap (d2 i) = d2 i := fun i => toElementMap_idem ha_ret (
    d i)
  have hle2 : (e.symm (F.principal hY)).1 ≤ iSupDirected d2 hdir2 := by
    calc (e.symm (F.principal hY)).1 = a.toElementMap (e.symm (F.principal hY)).1 :=
          (e.symm (F.principal hY)).2.symm
      _ ≤ a.toElementMap (iSupDirected d hdir) := a.toElementMap_mono hle
      _ = iSupDirected d2 hdir2 := toElementMap_iSupDirected a d hdir
  have hSfix2 : a.toElementMap (iSupDirected d2 hdir2) = iSupDirected d2 hdir2 :=
    toElementMap_iSupDirected_fixed d2 hdir2 hfix2
  have hdir2' : ∀ i j : I, ∃ k, e ⟨d2 i, hfix2 i⟩ ≤ e ⟨d2 k, hfix2 k⟩ ∧
      e ⟨d2 j, hfix2 j⟩ ≤ e ⟨d2 k, hfix2 k⟩ := fun i j => by
    obtain ⟨k, hik, hjk⟩ := hdir2 i j
    exact ⟨k, e.monotone hik, e.monotone hjk⟩
  have hle3 : F.principal hY ≤ iSupDirected (fun i => e ⟨d2 i, hfix2 i⟩) hdir2' := by
    have h1 : e ⟨(e.symm (F.principal hY)).1, (e.symm (F.principal hY)).2⟩ ≤
        e ⟨iSupDirected d2 hdir2, hSfix2⟩ := e.monotone hle2
    rwa [Subtype.coe_eta, e.apply_symm_apply,
      e_apply_iSupDirected_fixed e d2 hdir2 hfix2 hSfix2 hdir2'] at h1
  obtain ⟨i0, hi0⟩ := principal_isCompactElt hY _ _ hle3
  have hi0' : e.symm (F.principal hY) ≤ ⟨d2 i0, hfix2 i0⟩ := by
    have := e.symm.monotone hi0
    rwa [e.symm_apply_apply] at this
  have hfinal : (e.symm (F.principal hY)).1 ≤ d2 i0 := hi0'
  have hd2le : d2 i0 ≤ d i0 := by
    have := (le_iff_toElementMap_le.mp ha_proj) (d i0)
    rwa [toElementMap_idMap] at this
  exact ⟨i0, hfinal.trans hd2le⟩

theorem formula_of_isFinitaryProjection {a : ApproximableMap E E} (h :
    FinitaryProjection a) :
    ∀ (x : E.Element) {Y : Set α}, (a.toElementMap x).mem Y ↔
      E.mem Y ∧ ∃ X, x.mem X ∧ X ⊆ Y ∧ a.rel X X := by
  obtain ⟨⟨ha_ret, ha_proj⟩, β, F, ⟨e⟩⟩ := h.out
  intro x Y
  constructor
```

```
  · intro hY
    have hw : a.toElementMap (a.toElementMap x) = a.toElementMap x :=
    toElementMap_idem ha_ret x
    set w : E.Element := a.toElementMap x with hw_def
    have hYw : w.mem Y := hY
    have hclaim : (sectionMap e).toElementMap (e ⟨w, hw⟩) = w := by
      rw [toElementMap_sectionMap e (e ⟨w, hw⟩), e.symm_apply_apply]
    have hYsec : ((sectionMap e).toElementMap (e ⟨w, hw⟩)).mem Y := by rw [hclaim];
    exact hYw
    obtain ⟨W, hW, hYW⟩ := (toElementMap_mem_iff_principal (sectionMap e) (e ⟨w, hw⟩)).
    mp hYsec
    rw [toElementMap_sectionMap_principal] at hYW
    obtain ⟨X, hX, hXeq⟩ :=
      exists_principal_eq_of_isRetraction_le_idMap e ha_ret ha_proj ((e ⟨w, hw⟩).sub hW
    )
    rw [hXeq] at hYW
    obtain ⟨hYE, hXY⟩ := (E.mem_principal hX).mp hYW
    have hfixX : a.toElementMap (E.principal hX) = E.principal hX := by
      rw [← hXeq]; exact (e.symm (F.principal ((e ⟨w, hw⟩).sub hW))).2
    have haXX : a.rel X X := (a.rel_iff_mem_principal hX).mpr (by
      rw [hfixX]; exact (E.mem_principal hX).mpr ⟨hX, subset_rfl⟩)
    have hprincipal_le_w : E.principal hX ≤ w := by
      have h1 : F.principal ((e ⟨w, hw⟩).sub hW) ≤ e ⟨w, hw⟩ :=
        principal_le_of_mem hW
      have h2 : e.symm (F.principal ((e ⟨w, hw⟩).sub hW)) ≤ e.symm (e ⟨w, hw⟩) :=
        e.symm.monotone h1
      have h3 : (e.symm (F.principal ((e ⟨w, hw⟩).sub hW))).1 ≤ w := by
        have := h2
        rwa [e.symm_apply_apply] at this
      rwa [hXeq] at h3
    have hw_le_x : w ≤ x := by
      have := (le_iff_toElementMap_le.mp ha_proj) x
      rwa [toElementMap_idMap] at this
    have hXx : x.mem X := hprincipal_le_w.trans hw_le_x X ((E.mem_principal hX).mpr ⟨hX
    , subset_rfl⟩)
    exact ⟨hYE, X, hXx, hXY, haXX⟩
  · rintro ⟨hYE, X, hXx, hXY, hXaX⟩
    exact mem_of_exists_rel_self x hYE hXx hXY hXaX

end HardDirection

end

end DomainTheory.NeighbourhoodSystems
```

fixOfO.lean

```
module

public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Exercise_5_10
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_3

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13
```

```
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_4
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_9
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap ApproximableMap₂

def O : NeighborhoodSystem (Fin 2) where
  mem X := X = ({0} : Set (Fin 2)) ∨ X = ({0, 1} : Set (Fin 2))
  master := ({0, 1} : Set (Fin 2))
  master_nonempty := ⟨0, by simp⟩
  master_mem := Or.inr rfl
  inter_mem := by
    rintro X Y Z (rfl | rfl) (rfl | rfl) _ _
    · exact Or.inl (Set.inter_self _)
    · exact Or.inl (Set.inter_eq_left.mpr fin2_zero_subset_zero_one)
    · exact Or.inl (Set.inter_eq_right.mpr fin2_zero_subset_zero_one)
    · exact Or.inr (Set.inter_self _)
  sub_master := by
    rintro X (rfl | rfl)
    · exact fin2_zero_subset_zero_one
    · exact subset_rfl

theorem O_master_eq : O.master = ({0, 1} : Set (Fin 2)) := rfl

@[simp] theorem O_mem_iff {X : Set (Fin 2)} :
    O.mem X ↔ X = ({0} : Set (Fin 2)) ∨ X = ({0, 1} : Set (Fin 2)) := Iff.rfl

theorem O_mem_zero : O.mem ({0} : Set (Fin 2)) := Or.inl rfl

def Otop : O.Element := O.principal O_mem_zero

@[simp] theorem mem_Otop {Y : Set (Fin 2)} : Otop.mem Y ↔ O.mem Y ∧ ({0} : Set (Fin 2)
    ) ⊆ Y :=
  Iff.rfl

section
variable {α : Type*} {D : NeighborhoodSystem α}

def check : ApproximableMap D O where
  rel X Y := D.mem X ∧ O.mem Y ∧ (Y = ({0, 1} : Set (Fin 2)) ∨ X = D.master)
  rel_dom h := h.1
  rel_cod h := h.2.1
  master_rel := ⟨D.master_mem, O.master_mem, Or.inl rfl⟩
  inter_right := by
    rintro X Y Y' ⟨hX, hY, hY1⟩ ⟨-, hY', hY1'⟩
    refine ⟨hX, ?_, ?_⟩
    · rcases hY with rfl | rfl <;> rcases hY' with rfl | rfl
      · exact Or.inl (Set.inter_self _)
      · exact Or.inl (Set.inter_eq_left.mpr fin2_zero_subset_zero_one)
```

```
      · exact Or.inl (Set.inter_eq_right.mpr fin2_zero_subset_zero_one)
      · exact Or.inr (Set.inter_self _)
    · rcases hY1 with h1 | hXne
      · rcases hY1' with h1' | hXne'
        · left; rw [h1, h1']; simp
        · right; exact hXne'
      · right; exact hXne
  mono := by
    rintro X X' Y Y' ⟨hX, hY, hY1⟩ hXX' hYY' hX' hY'
    refine ⟨hX', hY', ?_⟩
    rcases hY1 with hYeq | hXne
    · left
      subst hYeq
      rcases hY' with rfl | rfl
      · exfalso
        have h1 : (1 : Fin 2) ∈ ({0, 1} : Set (Fin 2)) := by simp
        have h2 : (1 : Fin 2) ∈ ({0} : Set (Fin 2)) := hYY' h1
        simp at h2
      · rfl
    · right
      intro hX'eq
      apply hXne
      exact Set.Subset.antisymm (D.sub_master hX) (hX'eq ▶ hXX')

@[simp] theorem check_rel {X : Set α} {Y : Set (Fin 2)} :
    (check : ApproximableMap D O).rel X Y ↔
      D.mem X ∧ O.mem Y ∧ (Y = ({0, 1} : Set (Fin 2)) ∨ X = D.master) :=
  Iff.rfl

theorem exists_mem_ne_master_of_ne_bot {y : D.Element} (hy : y = D.bot) :
    ∃ Z, y.mem Z ∧ Z = D.master := by
  by_contra hcon
  push Not at hcon
  apply hy
  apply Element.ext
  intro Z
  rw [mem_bot]
  exact ⟨fun hZ => hcon Z hZ, fun hZ => hZ ▶ y.master_mem⟩

def fade₂ : ApproximableMap₂ O D D where
  rel X Y Z := O.mem X ∧ D.mem Y ∧ D.mem Z ∧ (Z = D.master ∨ (X = ({0} : Set (Fin 2))
    ∧ Y ⊆ Z))
  rel_dom₀ h := h.1
  rel_dom₁ h := h.2.1
  rel_cod h := h.2.2.1
  master_rel := ⟨O.master_mem, D.master_mem, D.master_mem, Or.inl rfl⟩
  inter_right := by
    rintro X Y Z Z' ⟨hX, hY, hZ, hZ1⟩ ⟨-, -, hZ', hZ1'⟩
    refine ⟨hX, hY, ?_, ?_⟩
    · rcases hZ1 with rfl | ⟨-, hYZ⟩
      · rwa [Set.inter_eq_right.mpr (D.sub_master hZ')]
      · rcases hZ1' with rfl | ⟨-, hYZ'⟩
        · rwa [Set.inter_eq_left.mpr (D.sub_master hZ)]
        · exact D.inter_mem hZ hZ' hY (Set.subset_inter hYZ hYZ')
    · rcases hZ1 with rfl | ⟨hXeq, hYZ⟩
      · rcases hZ1' with rfl | ⟨hXeq', hYZ'⟩
```

```
        · left; exact Set.inter_self _
        · right
          refine ⟨hXeq', ?_⟩
          rw [Set.inter_eq_right.mpr (D.sub_master hZ')]
          exact hYZ'
      · right
        refine ⟨hXeq, ?_⟩
        rcases hZ1' with rfl | ⟨-, hYZ'⟩
        · rw [Set.inter_eq_left.mpr (D.sub_master hZ)]
          exact hYZ
        · exact Set.subset_inter hYZ hYZ'
  mono := by
    rintro X X' Y Y' Z Z' ⟨hX, hY, hZ, hZ1⟩ hXX' hYY' hZZ' hX' hY' hZ'
    refine ⟨hX', hY', hZ', ?_⟩
    rcases hZ1 with rfl | ⟨hXeq, hYZ⟩
    · left; exact Set.Subset.antisymm (D.sub_master hZ') hZZ'
    · have hX'eq : X' = ({0} : Set (Fin 2)) := by
        rcases hX' with rfl | rfl
        · rfl
        · exfalso
          have h1 : (1 : Fin 2) ∈ ({0, 1} : Set (Fin 2)) := by simp
          have h2 : (1 : Fin 2) ∈ X := hXX' h1
          rw [hXeq] at h2
          simp at h2
      right
      exact ⟨hX'eq, hYY'.trans (hYZ.trans hZZ')⟩

def fade : ApproximableMap (prod O D) D := ofMap₂ fade₂

end

section
variable {α : Type*} {D : NeighborhoodSystem α}
variable (u : D.Element) (hu : u = D.bot)

def a : ApproximableMap D D := fade.comp (paired check (constMap D u))

def fixOfO (t : O.Element) : D.Element where
  mem Z := D.mem Z ∧ (Z = D.master ∨ (t.mem ({0} : Set (Fin 2)) ∧ u.mem Z))
  sub h := h.1
  master_mem := ⟨D.master_mem, Or.inl rfl⟩
  inter_mem := by
    rintro Z Z' ⟨hZ, hZ1⟩ ⟨hZ', hZ1'⟩
    refine ⟨?_, ?_⟩
    · rcases hZ1 with rfl | ⟨-, huZ⟩
      · rwa [Set.inter_eq_right.mpr (D.sub_master hZ')]
      · rcases hZ1' with rfl | ⟨-, huZ'⟩
        · rwa [Set.inter_eq_left.mpr (D.sub_master hZ)]
        · exact u.sub (u.inter_mem huZ huZ')
    · rcases hZ1 with rfl | ⟨ht, huZ⟩
      · rcases hZ1' with rfl | ⟨ht', huZ'⟩
        · left; exact Set.inter_self _
        · right
          refine ⟨ht', ?_⟩
          rw [Set.inter_eq_right.mpr (D.sub_master hZ')]
          exact huZ'
```

```
      · right
        refine ⟨ht, ?_⟩
        rcases hZ1' with rfl | ⟨-, huZ'⟩
        · rw [Set.inter_eq_left.mpr (D.sub_master hZ)]
          exact huZ
        · exact u.inter_mem huZ huZ'
  up_mem := by
    rintro Z Z' ⟨hZ, hZ1⟩ hZ'D hZZ'
    refine ⟨hZ'D, ?_⟩
    rcases hZ1 with rfl | ⟨ht, huZ⟩
    · left; exact Set.Subset.antisymm (D.sub_master hZ'D) hZZ'
    · right; exact ⟨ht, u.up_mem huZ hZ'D hZZ'⟩

@[simp] theorem mem_fixOfO {t : O.Element} {Z : Set α} :
    (fixOfO u t).mem Z ↔ D.mem Z ∧ (Z = D.master ∨ (t.mem ({0} : Set (Fin 2)) ∧ u.mem
     Z)) :=
  Iff.rfl

theorem O_le_iff {t t' : O.Element} :
    t ≤ t' ↔ (t.mem ({0} : Set (Fin 2)) → t'.mem ({0} : Set (Fin 2))) := by
  constructor
  · intro h; exact h _
  · intro h Y hY
    rcases O_mem_iff.mp (t.sub hY) with rfl | rfl
    · exact h hY
    · exact t'.master_mem

theorem fixOfO_mono {t t' : O.Element} (h : t ≤ t') : fixOfO u t ≤ fixOfO u t' := by
  intro Z hZ
  rw [mem_fixOfO] at hZ ⊢
  obtain ⟨hZD, hZeq | ⟨ht0, huZ⟩⟩ := hZ
  · exact ⟨hZD, Or.inl hZeq⟩
  · exact ⟨hZD, Or.inr ⟨O_le_iff.mp h ht0, huZ⟩⟩

theorem fixOfO_ne_bot_iff (hu : u = D.bot) {t : O.Element} :
    fixOfO u t = D.bot ↔ t.mem ({0} : Set (Fin 2)) := by
  constructor
  · intro hne
    by_contra ht0
    apply hne
    apply Element.ext
    intro Z
    rw [mem_fixOfO, mem_bot]
    constructor
    · rintro ⟨-, rfl | ⟨ht0', -⟩⟩
      · rfl
      · exact absurd ht0' ht0
    · rintro rfl
      exact ⟨D.master_mem, Or.inl rfl⟩
  · intro ht0 hbot
    obtain ⟨Z, huZ, hZne⟩ := exists_mem_ne_master_of_ne_bot hu
    have : (fixOfO u t).mem Z := ⟨u.sub huZ, Or.inr ⟨ht0, huZ⟩⟩
    rw [hbot, mem_bot] at this
    exact hZne this

end
```

```
section
variable {α : Type*} {D : NeighborhoodSystem α}

theorem mem_toElementMap_check {x : D.Element} {Y : Set (Fin 2)} :
    (check.toElementMap x).mem Y ↔ O.mem Y ∧ (Y = ({0, 1} : Set (Fin 2)) ∨ x = D.bot)
     := by
  rw [mem_toElementMap]
  constructor
  · rintro ⟨X, hxX, hXD, hYO, hcase⟩
    refine ⟨hYO, ?_⟩
    rcases hcase with h | hXne
    · exact Or.inl h
    · refine Or.inr fun hxbot => hXne ?_
      have hxX' : x.mem X := hxX
      rw [hxbot, mem_bot] at hxX'
      exact hxX'
  · rintro ⟨hYO, hYeq | hxne⟩
    · exact ⟨D.master, x.master_mem, D.master_mem, hYO, Or.inl hYeq⟩
    · obtain ⟨X, hxX, hXne⟩ := exists_mem_ne_master_of_ne_bot hxne
      exact ⟨X, hxX, x.sub hxX, hYO, Or.inr hXne⟩
end

section
variable {α : Type*} {D : NeighborhoodSystem α}
variable (u : D.Element) (hu : u = D.bot)

theorem check_toElementMap_fixOfO (hu : u = D.bot) (t : O.Element) :
    check.toElementMap (fixOfO u t) = t := by
  apply Element.ext
  intro Y
  rw [mem_toElementMap_check, fixOfO_ne_bot_iff u hu]
  constructor
  · rintro ⟨hYO, hYeq | ht0⟩
    · rw [hYeq, ← O_master_eq]; exact t.master_mem
    · rcases hYO with rfl | rfl
      · exact ht0
      · rw [← O_master_eq]; exact t.master_mem
  · intro htY
    have hYO : O.mem Y := t.sub htY
    refine ⟨hYO, ?_⟩
    rcases O_mem_iff.mp hYO with rfl | rfl
    · exact Or.inr htY
    · exact Or.inl rfl
end

section
variable {α : Type*} {D : NeighborhoodSystem α}

theorem mem_toElementMap₂_fade (t : O.Element) (y : D.Element) {Z : Set α} :
    (fade₂.toElementMap₂ t y).mem Z ↔
      D.mem Z ∧ (Z = D.master ∨ (t.mem ({0} : Set (Fin 2)) ∧ y.mem Z)) := by
  rw [mem_toElementMap₂]
  constructor
  · rintro ⟨X, Y, htX, hyY, hXO, hYD, hZD, hcase⟩
    refine ⟨hZD, ?_⟩
```

```
    rcases hcase with h | ⟨hXeq, hYZ⟩
    · exact Or.inl h
    · exact Or.inr ⟨hXeq ▸ htX, y.up_mem hyY hZD hYZ⟩
  · rintro ⟨hZD, hZeq | ⟨ht0, hyZ⟩⟩
    · exact ⟨O.master, D.master, t.master_mem, y.master_mem, O.master_mem, D.master_mem
    , hZD,
        Or.inl hZeq⟩
    · exact ⟨({0} : Set (Fin 2)), Z, ht0, hyZ, O_mem_zero, hZD, hZD, Or.inr ⟨rfl,
    subset_rfl⟩⟩

theorem toElementMap_ofMap₂_pair {β ? ? : Type*} {V₀ : NeighborhoodSystem β}
    {V₁ : NeighborhoodSystem ?} {V₂ : NeighborhoodSystem ?} (f₂ : ApproximableMap₂ V₀ V₁
     V₂)
    (p : V₀.Element) (q : V₁.Element) :
    (ofMap₂ f₂).toElementMap (pair p q) = f₂.toElementMap₂ p q := by
  have h := toElementMap₂_toMap₂ (ofMap₂ f₂) p q
  rw [toMap₂_ofMap₂] at h
  exact h.symm

end

section
variable {α : Type*} {D : NeighborhoodSystem α}
variable (u : D.Element) (hu : u = D.bot)

theorem mem_toElementMap_a {x : D.Element} {Z : Set α} :
    ((a u).toElementMap x).mem Z ↔ D.mem Z ∧ (Z = D.master ∨ (x = D.bot ∧ u.mem Z))
    := by
  show ((fade.comp (paired check (constMap D u))).toElementMap x).mem Z ↔ _
  rw [toElementMap_comp, toElementMap_paired, toElementMap_constMap]
  show (fade.toElementMap (pair (check.toElementMap x) u)).mem Z ↔ _
  rw [show fade = ofMap₂ fade₂ from rfl, toElementMap_ofMap₂_pair, mem_toElementMap₂
    _fade,
    mem_toElementMap_check]
  constructor
  · rintro ⟨hZD, hZeq | ⟨⟨-, hcase⟩, huZ⟩⟩
    · exact ⟨hZD, Or.inl hZeq⟩
    · rcases hcase with hYeq | hxne
      · exact absurd hYeq fin2_zero_ne_zero_one
      · exact ⟨hZD, Or.inr ⟨hxne, huZ⟩⟩
  · rintro ⟨hZD, hZeq | ⟨hxne, huZ⟩⟩
    · exact ⟨hZD, Or.inl hZeq⟩
    · exact ⟨hZD, Or.inr ⟨⟨O_mem_zero, Or.inr hxne⟩, huZ⟩⟩

theorem fixOfO_check_toElementMap (x : D.Element) :
    fixOfO u (check.toElementMap x) = (a u).toElementMap x := by
  apply Element.ext
  intro Z
  rw [mem_fixOfO, mem_toElementMap_a]
  have hcheck : (check.toElementMap x).mem ({0} : Set (Fin 2)) ↔ x = D.bot := by
    rw [mem_toElementMap_check]
    constructor
    · rintro ⟨-, h | h⟩
      · exact absurd h fin2_zero_ne_zero_one
      · exact h
    · intro h; exact ⟨O_mem_zero, Or.inr h⟩
```

```
  rw [hcheck]

theorem toElementMap_a_fixOfO (hu : u = D.bot) (t : O.Element) :
    (a u).toElementMap (fixOfO u t) = fixOfO u t := by
  apply Element.ext
  intro Z
  rw [mem_toElementMap_a, mem_fixOfO, fixOfO_ne_bot_iff u hu]

def fixIso (hu : u = D.bot) : O.Element ≃o {y : D.Element // (a u).toElementMap y = y}
    where
  toFun t := ⟨fixOfO u t, toElementMap_a_fixOfO u hu t⟩
  invFun y := check.toElementMap y.1
  left_inv t := check_toElementMap_fixOfO u hu t
  right_inv y := by
    apply Subtype.ext
    show fixOfO u (check.toElementMap y.1) = y.1
    rw [fixOfO_check_toElementMap, y.2]
  map_rel_iff' := by
    intro t t'
    show fixOfO u t ≤ fixOfO u t' ↔ t ≤ t'
    constructor
    · intro h
      have := toElementMap_mono check h
      rwa [check_toElementMap_fixOfO u hu, check_toElementMap_fixOfO u hu] at this
    · exact fixOfO_mono u

end

theorem Otop_ne_Obot : Otop = O.bot := by
  intro h
  have h1 : Otop.mem ({0} : Set (Fin 2)) := ⟨O_mem_zero, subset_rfl⟩
  rw [h, mem_bot, O_master_eq] at h1
  have h2 : (1 : Fin 2) ∈ ({0} : Set (Fin 2)) := by rw [h1]; simp
  simp at h2

section
variable {α : Type*} {D : NeighborhoodSystem α}
variable (u : D.Element) (hu : u = D.bot)

theorem a_bot : (a u).toElementMap D.bot = D.bot := by
  apply Element.ext
  intro Z
  rw [mem_toElementMap_a, mem_bot]
  exact ⟨fun ⟨_, h⟩ => h.resolve_right (fun h' => h'.1 rfl) |>.symm ▸ rfl,
    fun h => ⟨h ▸ D.master_mem, Or.inl h⟩⟩

theorem a_of_ne_bot {x : D.Element} (hx : x = D.bot) : (a u).toElementMap x = u := by
  apply Element.ext
  intro Z
  rw [mem_toElementMap_a]
  constructor
  · rintro ⟨-, hZeq | ⟨-, huZ⟩⟩
    · exact hZeq ▸ u.master_mem
    · exact huZ
  · intro huZ
    exact ⟨u.sub huZ, Or.inr ⟨hx, huZ⟩⟩
```

```
theorem isRetraction_a (hu : u = D.bot) : Retraction (a u) := by
  constructor
  apply ext_of_toElementMap
  intro x
  rw [toElementMap_comp]
  by_cases hx : x = D.bot
  · subst hx; rw [a_bot, a_bot]
  · rw [a_of_ne_bot u hx, a_of_ne_bot u hu]

theorem example84a (hu : u = D.bot) :
    Retraction (a u) ∧ Nonempty (O.Element ≃o {y : D.Element // (a u).toElementMap y =
     y}) :=

  ⟨isRetraction_a u hu, ⟨fixIso u hu⟩⟩

end

section
variable {α β : Type*} {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}

theorem check_toElementMap_mem_zero_iff {x : D.Element} :
    (check.toElementMap x).mem ({0} : Set (Fin 2)) ↔ x = D.bot := by
  rw [mem_toElementMap_check]
  constructor
  · rintro ⟨-, h | h⟩
    · exact absurd h fin2_zero_ne_zero_one
    · exact h
  · intro h; exact ⟨O_mem_zero, Or.inr h⟩

theorem mem_toElementMap_fade {? : Type*} {G : NeighborhoodSystem ?} (t : O.Element) (
    w : G.Element)
    {Z : Set ?} :
    ((fade (D := G)).toElementMap (pair t w)).mem Z ↔
      G.mem Z ∧ (Z = G.master ∨ (t.mem ({0} : Set (Fin 2)) ∧ w.mem Z)) := by
  rw [show (fade (D := G)) = ofMap₂ (fade₂ (D := G)) from rfl, toElementMap_ofMap₂_pair
    ,
    mem_toElementMap₂_fade]

end

end DomainTheory.NeighbourhoodSystems
```

strictRetraction.lean

```
module

public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Exercise_5_10
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_3
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.fixOfO

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_4
```

```
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_9
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap ApproximableMap₂

section
variable {α β : Type*} {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}

def strictEvalFade : ApproximableMap (prod (funSpace D E) D) E :=
  (fade (D := E)).comp
    (paired ((check (D := D)).comp (proj₁ (funSpace D E) D)) (evalMap D E))

def strictRetraction : ApproximableMap (funSpace D E) (funSpace D E) := curry
    strictEvalFade

theorem toApproxMap_strictRetraction_mem {φ : (funSpace D E).Element} {y : D.Element}
    {Z : Set β} :
    ((toApproxMap (strictRetraction.toElementMap φ)).toElementMap y).mem Z ↔
      E.mem Z ∧ (Z = E.master ∨ (y = D.bot ∧ ((toApproxMap φ).toElementMap y).mem Z))
    := by
  show ((toApproxMap ((curry strictEvalFade).toElementMap φ)).toElementMap y).mem Z ↔
    _
  rw [toElementMap_curry_apply]
  show (((fade (D := E)).comp
    (paired ((check (D := D)).comp (proj₁ (funSpace D E) D)) (evalMap D E))).
    toElementMap
      (pair φ y)).mem Z ↔ _
  rw [toElementMap_comp, toElementMap_paired, toElementMap_comp, toElementMap_proj₁,
    snd_pair,
    evalMap_apply, mem_toElementMap_fade, check_toElementMap_mem_zero_iff]

theorem strictRetraction_apply_bot (φ : (funSpace D E).Element) :
    (toApproxMap (strictRetraction.toElementMap φ)).toElementMap D.bot = E.bot := by
  apply Element.ext
  intro Z
  rw [toApproxMap_strictRetraction_mem, mem_bot]
  constructor
  · rintro ⟨-, rfl | ⟨hne, -⟩⟩
    · rfl
    · exact absurd rfl hne
  · rintro rfl
    exact ⟨E.master_mem, Or.inl rfl⟩

theorem isStrict_toApproxMap_of_fixed {φ : (funSpace D E).Element}
    (hφ : strictRetraction.toElementMap φ = φ) : Exercise510.IsStrict (toApproxMap φ)
    := by
  rw [Exercise510.isStrict_iff_apply_bot]
  have h := strictRetraction_apply_bot φ
  rwa [hφ] at h
```

```
theorem strictRetraction_apply_of_ne_bot {y : D.Element} (hy : y = D.bot)
    (φ : (funSpace D E).Element) :
    (toApproxMap (strictRetraction.toElementMap φ)).toElementMap y
      = (toApproxMap φ).toElementMap y := by
  apply Element.ext
  intro Z
  rw [toApproxMap_strictRetraction_mem]
  constructor
  · rintro ⟨-, rfl | ⟨-, hZ⟩⟩
    · exact ((toApproxMap φ).toElementMap y).master_mem
    · exact hZ
  · intro hZ
    exact ⟨((toApproxMap φ).toElementMap y).sub hZ, Or.inr ⟨hy, hZ⟩⟩

theorem toApproxMap_toFilter (f : ApproximableMap D E) : toApproxMap (toFilter f) = f
    :=
  (funSpaceEquiv D E).right_inv f

theorem toFilter_toApproxMap (φ : (funSpace D E).Element) : toFilter (toApproxMap φ) =
     φ :=
  (funSpaceEquiv D E).left_inv φ

theorem strictRetraction_fixed_of_isStrict {f : ApproximableMap D E} (hf : Exercise510
    .IsStrict f) :
    strictRetraction.toElementMap (toFilter f) = toFilter f := by
  have hbot : f.toElementMap D.bot = E.bot := Exercise510.isStrict_iff_apply_bot.mp hf
  have key : toApproxMap (strictRetraction.toElementMap (toFilter f)) = f := by
    apply ext_of_toElementMap
    intro y
    by_cases hy : y = D.bot
    · rw [hy, strictRetraction_apply_bot, hbot]
    · rw [strictRetraction_apply_of_ne_bot hy, toApproxMap_toFilter]
  rw [← toFilter_toApproxMap (strictRetraction.toElementMap (toFilter f)), key]

def strictRetractionFixIso :
    {φ : (funSpace D E).Element // strictRetraction.toElementMap φ = φ} ≃o
      Exercise510.StrictMap D E where
  toFun φ := ⟨toApproxMap φ.1, isStrict_toApproxMap_of_fixed φ.2⟩
  invFun f := ⟨toFilter f.1, strictRetraction_fixed_of_isStrict f.2⟩
  left_inv φ := Subtype.ext (toFilter_toApproxMap φ.1)
  right_inv f := Subtype.ext (toApproxMap_toFilter f.1)
  map_rel_iff' := by
    intro φ φ'
    show toApproxMap φ.1 ≤ toApproxMap φ'.1 ↔ φ.1 ≤ φ'.1
    exact (funSpaceEquiv D E).map_rel_iff

theorem strictRetraction_le_idMap : strictRetraction (D := D) (E := E) ≤ idMap (
    funSpace D E) := by
  rw [le_iff_toElementMap_le]
  intro φ
  rw [toElementMap_idMap]
  have hmap : toApproxMap (strictRetraction.toElementMap φ) ≤ toApproxMap φ := by
    rw [le_iff_toElementMap_le]
    intro y
    by_cases hy : y = D.bot
    · rw [hy, strictRetraction_apply_bot]
```

```
      intro Z hZ
      rw [mem_bot] at hZ
      rw [hZ]
      exact ((toApproxMap φ).toElementMap D.bot).master_mem
    · rw [strictRetraction_apply_of_ne_bot hy]
  exact (funSpaceEquiv D E).map_rel_iff.mp hmap

theorem toApproxMap_injective {a b : (funSpace D E).Element} (h : toApproxMap a =
    toApproxMap b) :
    a = b := by
  rw [← toFilter_toApproxMap a, ← toFilter_toApproxMap b, h]

theorem isRetraction_strictRetraction : Retraction (strictRetraction (D := D) (E := E)
    ) := by
  constructor
  apply ext_of_toElementMap
  intro φ
  rw [toElementMap_comp]
  apply toApproxMap_injective
  apply ext_of_toElementMap
  intro y
  by_cases hy : y = D.bot
  · rw [hy, strictRetraction_apply_bot, strictRetraction_apply_bot]
  · rw [strictRetraction_apply_of_ne_bot hy, strictRetraction_apply_of_ne_bot hy]

theorem example84b_strict :
    IsProjection (strictRetraction (D := D) (E := E)) ∧
      Nonempty ((Exercise510.strictFun D E).Element ≃o
        {φ : (funSpace D E).Element // strictRetraction.toElementMap φ = φ}) :=
  ⟨⟨isRetraction_strictRetraction, strictRetraction_le_idMap⟩,
    ⟨strictRetractionFixIso.trans (Exercise510.strictFunEquiv D E).symm |>.symm⟩⟩
end

end DomainTheory.NeighbourhoodSystems
```

smashRetraction.lean

```
module

public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Exercise_5_10
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_3
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.fixOfO

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_4
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_9
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section
```

```
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap ApproximableMap₂

section
variable {α β : Type*} {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}

theorem pair_bot_bot : pair (D.bot) (E.bot) = (prod D E).bot := by
  apply Element.ext
  intro W
  rw [mem_pair, mem_bot]
  constructor
  · rintro ⟨X, Y, hX, hY, rfl⟩
    rw [mem_bot] at hX hY
    rw [hX, hY, prod_master]
  · intro hW
    refine ⟨D.master, E.master, ?_, ?_, ?_⟩
    · rw [mem_bot]
    · rw [mem_bot]
    · rw [hW, prod_master]

@[simp] theorem prod_bot_fst : ((prod D E).bot).fst = D.bot := by rw [← pair_bot_bot,
    fst_pair]

@[simp] theorem prod_bot_snd : ((prod D E).bot).snd = E.bot := by rw [← pair_bot_bot,
    snd_pair]

def smashFadeInner : ApproximableMap (prod D E) (prod D E) :=
  (fade (D := prod D E)).comp
    (paired ((check (D := E)).comp (proj₁ D E)) (idMap (prod D E)))

def smashRetraction : ApproximableMap (prod D E) (prod D E) :=
  (fade (D := prod D E)).comp
    (paired ((check (D := D)).comp (proj₀ D E)) (smashFadeInner (D := D) (E := E)))

theorem exists_smash_witness {z : (prod D E).Element} (hx : z.fst = D.bot) (hy : z.snd
    = E.bot)
    {Z : Set (α ? β)} (hzZ : z.mem Z) :
    ∃ Y, (Exercise510.smash D E).mem Y ∧ z.mem Y ∧ Y ⊆ Z := by
  obtain ⟨X0, hX0, hX0ne⟩ := exists_mem_ne_master_of_ne_bot hx
  obtain ⟨Y0, hY0, hY0ne⟩ := exists_mem_ne_master_of_ne_bot hy
  set A := Sum.inl ^-1' Z with hA
  set B := Sum.inr ^-1' Z with hB
  have hZeq : Z = prodNbhd A B := prodNbhd_preimage (z.sub hzZ)
  have hAmem : D.mem A := prod_mem_inl (z.sub hzZ)
  have hBmem : E.mem B := prod_mem_inr (z.sub hzZ)
  rw [hZeq] at hzZ
  have hzfA : z.fst.mem A := mem_fst.mpr ⟨hAmem, ((prod_mem_split hAmem hBmem).mp hzZ)
    .1⟩
  have hzsB : z.snd.mem B := mem_snd.mpr ⟨hBmem, ((prod_mem_split hAmem hBmem).mp hzZ)
    .2⟩
  have hzfX0' : z.fst.mem (X0 ∩ A) := z.fst.inter_mem hX0 hzfA
  have hzsY0' : z.snd.mem (Y0 ∩ B) := z.snd.inter_mem hY0 hzsB
  have hX0'mem : D.mem (X0 ∩ A) := z.fst.sub hzfX0'
  have hY0'mem : E.mem (Y0 ∩ B) := z.snd.sub hzsY0'
  have hX0'ne : X0 ∩ A = D.master := Exercise510.inter_ne_master_left (z.fst.sub hX0)
```

```
    hX0ne
  have hY0'ne : Y0 ∩ B = E.master := Exercise510.inter_ne_master_right (z.snd.sub hY0)
     hY0ne
  refine ⟨prodNbhd (X0 ∩ A) (Y0 ∩ B),
    Exercise510.smash_mem_proper hX0'mem hX0'ne hY0'mem hY0'ne, ?_, ?_⟩
  · exact (prod_mem_split hX0'mem hY0'mem).mpr
      ⟨(mem_fst.mp hzfX0').2, (mem_snd.mp hzsY0').2⟩
  · rw [hZeq]
    exact prodNbhd_subset_iff.mpr ⟨Set.inter_subset_right, Set.inter_subset_right⟩

theorem smashFadeInner_mem {z : (prod D E).Element} {Z : Set (α ? β)} :
    (smashFadeInner.toElementMap z).mem Z ↔
      (prod D E).mem Z ∧ (Z = (prod D E).master ∨ (z.snd = E.bot ∧ z.mem Z)) := by
  show (((fade (D := prod D E)).comp
    (paired ((check (D := E)).comp (proj₁ D E)) (idMap (prod D E)))).toElementMap z).
    mem Z ↔ _
  rw [toElementMap_comp, toElementMap_paired, toElementMap_comp, toElementMap_proj₁,
    toElementMap_idMap, mem_toElementMap_fade, check_toElementMap_mem_zero_iff]

theorem smashRetraction_mem {z : (prod D E).Element} {Z : Set (α ? β)} :
    (smashRetraction.toElementMap z).mem Z ↔
      (prod D E).mem Z ∧
        (Z = (prod D E).master ∨ (z.fst = D.bot ∧ (smashFadeInner.toElementMap z).mem
    Z)) := by
  show (((fade (D := prod D E)).comp
    (paired ((check (D := D)).comp (proj₀ D E)) smashFadeInner)).toElementMap z).mem Z
    ↔ _
  rw [toElementMap_comp, toElementMap_paired, toElementMap_comp, toElementMap_proj₀,
    mem_toElementMap_fade, check_toElementMap_mem_zero_iff]

theorem smashRetraction_mem_iff {z : (prod D E).Element} {Z : Set (α ? β)} :
    (smashRetraction.toElementMap z).mem Z ↔
      (prod D E).mem Z ∧
        (Z = (prod D E).master ∨ (z.fst = D.bot ∧ z.snd = E.bot ∧ z.mem Z)) := by
  rw [smashRetraction_mem, smashFadeInner_mem]
  constructor
  · rintro ⟨hPZ, hZeq | ⟨hx, hPZ', hZeq' | ⟨hy, hzZ⟩⟩⟩
    · exact ⟨hPZ, Or.inl hZeq⟩
    · exact ⟨hPZ, Or.inl hZeq'⟩
    · exact ⟨hPZ, Or.inr ⟨hx, hy, hzZ⟩⟩
  · rintro ⟨hPZ, hZeq | ⟨hx, hy, hzZ⟩⟩
    · exact ⟨hPZ, Or.inl hZeq⟩
    · exact ⟨hPZ, Or.inr ⟨hx, hPZ, Or.inr ⟨hy, hzZ⟩⟩⟩

theorem smashRetraction_le_idMap : smashRetraction (D := D) (E := E) ≤ idMap (prod D E
    ) := by
  rw [le_iff_toElementMap_le]
  intro z
  rw [toElementMap_idMap]
  intro Z hZ
  rw [smashRetraction_mem_iff] at hZ
  rcases hZ with ⟨hPZ, rfl | ⟨-, -, hzZ⟩⟩
  · exact z.master_mem
  · exact hzZ

theorem smashRetraction_of_eq_bot {z : (prod D E).Element} (hz : z.fst = D.bot ∨ z.snd
```

```
     = E.bot) :
    smashRetraction.toElementMap z = (prod D E).bot := by
  apply Element.ext
  intro Z
  rw [smashRetraction_mem_iff, mem_bot]
  constructor
  · rintro ⟨-, rfl | ⟨hx, hy, -⟩⟩
    · rfl
    · exact absurd hz (by simp [hx, hy])
  · rintro rfl
    exact ⟨(prod D E).master_mem, Or.inl rfl⟩

theorem smashRetraction_of_ne_bot {z : (prod D E).Element} (hx : z.fst = D.bot)
    (hy : z.snd = E.bot) : smashRetraction.toElementMap z = z := by
  apply Element.ext
  intro Z
  rw [smashRetraction_mem_iff]
  constructor
  · rintro ⟨hPZ, hZeq | ⟨-, -, hzZ⟩⟩
    · rw [hZeq]; exact z.master_mem
    · exact hzZ
  · intro hzZ
    exact ⟨z.sub hzZ, Or.inr ⟨hx, hy, hzZ⟩⟩

theorem isRetraction_smashRetraction : Retraction (smashRetraction (D := D) (E := E))
    := by
  constructor
  apply ext_of_toElementMap
  intro z
  rw [toElementMap_comp]
  by_cases hx : z.fst = D.bot
  · rw [smashRetraction_of_eq_bot (Or.inl hx),
      smashRetraction_of_eq_bot (Or.inl prod_bot_fst)]
  · by_cases hy : z.snd = E.bot
    · rw [smashRetraction_of_eq_bot (Or.inr hy),
        smashRetraction_of_eq_bot (Or.inr prod_bot_snd)]
    · rw [smashRetraction_of_ne_bot hx hy, smashRetraction_of_ne_bot hx hy]

theorem smash_subsystem_prod : Exercise510.smash D E ? prod D E where
  master_eq := by rw [Exercise510.smash_master, prod_master]
  sub := by
    rintro W (rfl | ⟨X, Y, hX, -, hY, -, rfl⟩)
    · exact prod_mem_prodNbhd D.master_mem E.master_mem
    · exact prod_mem_prodNbhd hX hY
  inter_closed := by
    rintro W W' (rfl | ⟨X, Y, hX, hXne, hY, hYne, rfl⟩) hW' hPint
    ·
      rcases hW' with rfl | ⟨X', Y', hX', hX'ne, hY', hY'ne, rfl⟩
      · left; rw [Set.inter_self]
      · right
        refine ⟨X', Y', hX', hX'ne, hY', hY'ne, ?_⟩
        rw [prodNbhd_inter, Set.inter_eq_right.mpr (D.sub_master hX'),
          Set.inter_eq_right.mpr (E.sub_master hY')]
    ·
      rcases hW' with rfl | ⟨X', Y', hX', hX'ne, hY', hY'ne, rfl⟩
      · right
```

```
        refine ⟨X, Y, hX, hXne, hY, hYne, ?_⟩
        rw [prodNbhd_inter, Set.inter_eq_left.mpr (D.sub_master hX),
          Set.inter_eq_left.mpr (E.sub_master hY)]
      .
        rw [prodNbhd_inter] at hPint ⊢
        obtain ⟨hXX'mem, hYY'mem⟩ := prod_mem_prodNbhd_iff.mp hPint
        exact Or.inr ⟨X ∩ X', Y ∩ Y', hXX'mem, Exercise510.inter_ne_master_left hX hXne
    , hYY'mem,
          Exercise510.inter_ne_master_right hY hYne, rfl⟩

theorem mem_toElementMap_retractionOfSubsystem_smash {z : (prod D E).Element}
    {Z : Set (α ? β)} :
    ((Subsystem.retractionOfSubsystem (smash_subsystem_prod (D := D) (E := E))).
    toElementMap z).mem
        Z ↔
      (prod D E).mem Z ∧ ∃ Y, (Exercise510.smash D E).mem Y ∧ z.mem Y ∧ Y ⊆ Z := by
  rw [mem_toElementMap]
  constructor
  · rintro ⟨X, hzX, hrel⟩
    obtain ⟨hPX, hPZ, Y, hSY, hXY, hYZ⟩ := (Subsystem.retractionOfSubsystem_rel _).mp
    hrel
    exact ⟨hPZ, Y, hSY, z.up_mem hzX (smash_subsystem_prod.sub hSY) hXY, hYZ⟩
  · rintro ⟨hPZ, Y, hSY, hzY, hYZ⟩
    exact ⟨Y, hzY, (Subsystem.retractionOfSubsystem_rel _).mpr
      ⟨z.sub hzY, hPZ, Y, hSY, subset_rfl, hYZ⟩⟩

theorem smashRetraction_eq_retractionOfSubsystem :
    smashRetraction (D := D) (E := E) = Subsystem.retractionOfSubsystem
    smash_subsystem_prod := by
  apply ext_of_toElementMap
  intro z
  apply Element.ext
  intro Z
  rw [smashRetraction_mem_iff, mem_toElementMap_retractionOfSubsystem_smash]
  constructor
  · rintro ⟨hPZ, rfl | ⟨hx, hy, hzZ⟩⟩
    · exact ⟨hPZ, (prod D E).master, Exercise510.smash_mem_iff.mpr (Or.inl rfl), z.
    master_mem,
        subset_rfl⟩
    · exact ⟨hPZ, exists_smash_witness hx hy hzZ⟩
  · rintro ⟨hPZ, Y, hSY, hzY, hYZ⟩
    rcases Exercise510.smash_mem_iff.mp hSY with rfl | ⟨YA, YB, hYA, hYAne, hYB, hYBne,
     rfl⟩
    · exact ⟨hPZ, Or.inl (Set.Subset.antisymm ((prod D E).sub_master hPZ) hYZ)⟩
    · have hzfYA : z.fst.mem YA := mem_fst.mpr ⟨hYA, ((prod_mem_split hYA hYB).mp hzY)
    .1⟩
      have hzsYB : z.snd.mem YB := mem_snd.mpr ⟨hYB, ((prod_mem_split hYA hYB).mp hzY)
    .2⟩
      refine ⟨hPZ, Or.inr ⟨?_, ?_, z.up_mem hzY hPZ hYZ⟩⟩
      · intro hxbot; rw [hxbot, mem_bot] at hzfYA; exact hYAne hzfYA
      · intro hybot; rw [hybot, mem_bot] at hzsYB; exact hYBne hzsYB

theorem example84b_smash :
    IsProjection (smashRetraction (D := D) (E := E)) ∧
      Nonempty ((Exercise510.smash D E).Element ≃o
        {z : (prod D E).Element // smashRetraction.toElementMap z = z}) := by
```

```
  rw [smashRetraction_eq_retractionOfSubsystem]
  exact ⟨Subsystem.isProjection_retractionOfSubsystem smash_subsystem_prod,
    ⟨Subsystem.elementIso smash_subsystem_prod⟩⟩
end

end DomainTheory.NeighbourhoodSystems
```

Examples_8_4.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.fixOfO
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    smashRetraction
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    strictRetraction
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.fixedNbhd

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

end DomainTheory.NeighbourhoodSystems
```

3.9.6 Theorem 8.5 — finitary projection test

THEOREM 8.5. For an approximable mapping $a : E \to E$ the following are equivalent:

(i) a is a finitary projection;

(ii) $a(x) = \{Y \in E \mid \exists X \in x.\, X \subseteq Y \wedge X\ a\ X\}$, for all $x \in |E|$.

Proof: Suppose a satisfies (ii) first. Inasmuch as $X \in x$ and $X \subseteq Y$ always imply $Y \in x$, for all $x \in |E|$, we see $a(x) \subseteq x$ must always hold. Moreover, it is obvious that $X \in x$ and $X\ a\ X$ always imply $X \in a(x)$; therefore, $a(x) \subseteq a(a(x))$ for all $x \in |E|$. This shows that a
is indeed a projection.

Let $D = \{X \in E \mid X\ a\ X\}$, then it is easy to check that $D \mathrel{\triangleleft} E$ and that a is determined from D exactly as in 8.2; thus, the fixed-point set of a is isomorphic to a domain, by what we have already proved. So we have shown (ii) implies (i).

In the converse direction, assume that a is a finitary projection. And let the system D be isomorphic to the fixed-point set of a. We have the situation of Theorem 6.15. There is a projection pair,

$$i : D \to E \quad \text{and} \quad j : E \to D,$$

where the connection with a gives:

$$j \circ i = I_D \quad \text{and} \quad i \circ j = a \subseteq I_E.$$

By 6.15, $D \cong D' \mathrel{\triangleleft} E$, and we want to identify D' in terms of a as follows:

$$D' = \{X \in E \mid X\ a\ X\}.$$

Now from a reading of the proof of 6.15 the neighbourhoods of D' are just those corresponding to the finite elements of D. But any such element is a fixed point of a. We have

$$X \in D' \quad \text{implies} \quad a(\uparrow X) = \uparrow X \quad \text{implies} \quad X\ a\ X.$$

Conversely, if $X\ a\ X$ holds, then $\uparrow X \subseteq a(\uparrow X)$. But a is a projection, so $\uparrow X$ is a fixed point. But $i(j(\uparrow X)) = \uparrow X$ means $j(\uparrow X)$ is a finite element of $|D|$. So $X \in D'$, and we have D' identified as desired.

Finally, if we calculate $a = i \circ j$ by the formulae of 6.12 (with D' for D, of course), we obtain our formula (ii). □

The criterion for being a finitary projection just obtained provides us with a very interesting new combinator.

Theorem_8_5.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_3

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Examples_8_4

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
universe u
variable {α : Type u} {E : NeighborhoodSystem α}

theorem finitaryProjection_iff_formula (a : ApproximableMap E E) :
    FinitaryProjection a ↔ ∀ (x : E.Element) {Y : Set α}, (a.toElementMap x).mem Y ↔
      E.mem Y ∧ ∃ X, x.mem X ∧ X ⊆ Y ∧ a.rel X X :=
  ⟨fun h => formula_of_isFinitaryProjection h, fun hii =>
    isFinitaryProjection_of_formula a hii⟩
end

set_option linter.unusedVariables false

theorem theorem_85.{u} : And
  (And
    (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      {a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E},
      @DomainTheory.NeighbourhoodSystems.FinitaryProjection α E a →
        ∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E) {Y :
    Set α},
         Iff
           (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem α E
             (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E E
    a x) Y)
           (And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α E Y)
             (∃ (X : Set α),
               And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
    α E x X)
                 (And (@LE.le (Set α) (@Set.instLE α) X Y)
```

```
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α α E E a
  X X)))))
  (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E),
    Iff (@DomainTheory.NeighbourhoodSystems.FinitaryProjection α E a)
      (∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E) {Y
  : Set α},
        Iff
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem α E
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E E
   a x) Y)
          (And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α E Y)
            (∃ (X : Set α),
              And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
   α E x X)
                (And (@LE.le (Set α) (@Set.instLE α) X Y)
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α α E E a
  X X)))))))
(∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E),
  (∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E) {Y :
  Set α},
      Iff
        (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem α E
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E E a
   x) Y)
        (And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α E Y)
          (∃ (X : Set α),
            And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem α
   E x X)
              (And (@LE.le (Set α) (@Set.instLE α) X Y)
                (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α α E E a X
  X))))) →
    @DomainTheory.NeighbourhoodSystems.FinitaryProjection α E a) :=
@And.intro
(And
  (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    {a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E},
    @DomainTheory.NeighbourhoodSystems.FinitaryProjection α E a →
      ∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E) {Y :
   Set α},
        Iff
          (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem α E
            (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E E
   a x) Y)
          (And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α E Y)
            (∃ (X : Set α),
              And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
   α E x X)
                (And (@LE.le (Set α) (@Set.instLE α) X Y)
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α α E E a
  X X)))))
  (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E),
    Iff (@DomainTheory.NeighbourhoodSystems.FinitaryProjection α E a)
      (∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E) {Y
```

```
 : Set α},
       Iff
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem α E
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E E
  a x) Y)
         (And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α E Y)
           (∃ (X : Set α),
             And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
  α E x X)
               (And (@LE.le (Set α) (@Set.instLE α) X Y)
                 (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α α E E a
 X X)))))))
(∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E),
  (∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E) {Y :
 Set α},
     Iff
       (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem α E
         (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E E a
  x) Y)
       (And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α E Y)
         (∃ (X : Set α),
           And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem α
  E x X)
             (And (@LE.le (Set α) (@Set.instLE α) X Y)
               (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α α E E a X
 X))))) →
   @DomainTheory.NeighbourhoodSystems.FinitaryProjection α E a)
(@And.intro
  (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    {a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E},
    @DomainTheory.NeighbourhoodSystems.FinitaryProjection α E a →
      ∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E) {Y :
  Set α},
       Iff
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem α E
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E E
  a x) Y)
         (And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α E Y)
           (∃ (X : Set α),
             And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
  α E x X)
               (And (@LE.le (Set α) (@Set.instLE α) X Y)
                 (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α α E E a
 X X)))))
  (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E),
    Iff (@DomainTheory.NeighbourhoodSystems.FinitaryProjection α E a)
      (∀ (x : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E) {Y
 : Set α},
       Iff
         (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem α E
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E E
  a x) Y)
         (And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α E Y)
           (∃ (X : Set α),
```

```
              And (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element.mem
     α E x X)
                (And (@LE.le (Set α) (@Set.instLE α) X Y)
                  (@DomainTheory.NeighbourhoodSystems.ApproximableMap.rel α α E E a
    X X))))))
    @DomainTheory.NeighbourhoodSystems.formula_of_isFinitaryProjection
    @DomainTheory.NeighbourhoodSystems.finitaryProjection_iff_formula)
  @DomainTheory.NeighbourhoodSystems.isFinitaryProjection_of_formula

end DomainTheory.NeighbourhoodSystems
```

3.9.7 Theorem 8.6 — sub combinator

THEOREM 8.6. For any domain E define

$$\mathrm{sub} : (E \to E) \to (E \to E)$$

by the formula

$$X \ \mathrm{sub}\ (f)\ Z \quad \text{iff} \quad \exists Y \in E.\quad X \subseteq Y \ \ f\ Y \subseteq Z,$$

for all $X, Z \in E$ and all $f : E \to E$. Then the range of sub consists exactly of the finitary projections on E, and moreover sub itself is a finitary projection on $(E \to E)$. If E is effectively given, then sub is computable.

Proof: It is trivial to check that $\mathrm{sub}(f)$ is always approximable. Also, it is obvious from the definition that the correspondence

$$f \mapsto \mathrm{sub}(f)$$

preserves directed unions of f's. Thus, sub is itself approximable. We note that

$$X \subseteq Y \ \ f\ Y \subseteq Z \text{ always implies } X\ f\ Z;$$

hence, $\mathrm{sub}(f) \subseteq f$ holds. Also

$$Y\ f\ Y \text{ always implies } Y\ \mathrm{sub}(f)\ Y,$$

hence, $\mathrm{sub}(f) \subseteq \mathrm{sub}(\mathrm{sub}(f))$ holds. This shows sub to be a projection on $(E \to E)$. The effectiveness of the definition makes it also clear that sub is computable when E has a computable presentation.

Since, sub is a projection, its range is the same as its fixed-point set. If

$$\mathrm{sub}(a) = a,$$

then there is no problem in checking that a satisfies 8.5(ii) *and conversely*. So the range of sub picks out exactly the finitary projections in view of 8.5.

Finally, to prove that sub is a finitary projection of $(E \to E)$, we invoke 6.11 and remark that, in view of 8.2, the fixed point set (range) of sub is in a one-one inclusion-preserving correspondence with the domain $\{D \mid D \lhd E\}$. $\square$

These results have almost completely translated the theory of $\lhd$-subdomains into λ-calculus via the sub-combinator. One last step will complete the passage, and then we shall be able to return to solving domain equations.

sub.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Examples_8_4
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Proposition_6_11

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
universe u
variable {α : Type u} {E : NeighborhoodSystem α}

def sub (f : ApproximableMap E E) : ApproximableMap E E :=
  Subsystem.retractionOfSubsystem (fixedNbhd_subsystem f)

theorem fixedNbhd_retractionOfSubsystem {D : NeighborhoodSystem α} (h : D ? E) :
    fixedNbhd (Subsystem.retractionOfSubsystem h) = D := by
  apply NeighborhoodSystem.ext
  · intro X
    rw [fixedNbhd_mem, Subsystem.retractionOfSubsystem_rel]
    constructor
    · rintro ⟨hXE, -, -, Y, hY, hXY, hYX⟩
      rw [Set.Subset.antisymm hXY hYX]
      exact hY
    · intro hX
      exact ⟨h.sub hX, h.sub hX, h.sub hX, X, hX, subset_rfl, subset_rfl⟩
  · exact h.master_eq.symm

namespace sub

@[simp] theorem rel {f : ApproximableMap E E} {X Z : Set α} :
    (sub f).rel X Z ↔ E.mem X ∧ E.mem Z ∧ ∃ Y, (E.mem Y ∧ f.rel Y Y) ∧ X ⊆ Y ∧ Y ⊆ Z
     :=
  Subsystem.retractionOfSubsystem_rel (fixedNbhd_subsystem f)

theorem mono {f g : ApproximableMap E E} (h : f ≤ g) : sub f ≤ sub g := by
  rintro X Z hr
  obtain ⟨hX, hZ, Y, ⟨hYE, hYf⟩, hXY, hYZ⟩ := rel.mp hr
  exact rel.mpr ⟨hX, hZ, Y, ⟨hYE, h Y Y hYf⟩, hXY, hYZ⟩

theorem retractionOfSubsystem {D : NeighborhoodSystem α} (h : D ? E) :
    sub (Subsystem.retractionOfSubsystem h) = Subsystem.retractionOfSubsystem h := by
  unfold sub
  congr 1
  exact fixedNbhd_retractionOfSubsystem h

end sub
```

```
def finitaryProjectionSubsystemEquiv (E : NeighborhoodSystem α) :
    {f : ApproximableMap E E // sub f = f} ≃o {D : NeighborhoodSystem α // D ? E}
    where
  toFun f := ⟨fixedNbhd f.1, fixedNbhd_subsystem f.1⟩
  invFun D := ⟨Subsystem.retractionOfSubsystem D.2, sub.retractionOfSubsystem D.2⟩
  left_inv f := Subtype.ext f.2
  right_inv D := Subtype.ext (fixedNbhd_retractionOfSubsystem D.2)
  map_rel_iff' := by
    intro f g
    constructor
    · intro hle
      have hleD : fixedNbhd f.1 ? fixedNbhd g.1 := hle
      have hsub : sub f.1 ≤ sub g.1 := by
        rintro X Z hXZ
        rw [sub.rel] at hXZ ⊢
        obtain ⟨hX, hZ, Y, hY, hXY, hYZ⟩ := hXZ
        exact ⟨hX, hZ, Y, hleD.sub hY, hXY, hYZ⟩
      rwa [f.2, g.2] at hsub
    · intro hfg
      show fixedNbhd f.1 ? fixedNbhd g.1
      refine (Subsystem.subsystem_iff_subset_of_common
        (fixedNbhd_subsystem f.1) (fixedNbhd_subsystem g.1)).mpr ?_
      intro X hX
      exact ⟨hX.1, hfg X X hX.2⟩

theorem fixedNbhd_sub (f : ApproximableMap E E) : fixedNbhd (sub f) = fixedNbhd f :=
    by
  apply NeighborhoodSystem.ext
  · intro Y
    constructor
    · intro hmem
      have hr : (sub f).rel Y Y := hmem.2
      obtain ⟨hYE, -, Y', hY', hYY', hY'Y⟩ := sub.rel.mp hr
      obtain ⟨hY'E, hY'f⟩ := hY'
      have hYY'eq : Y' = Y := Set.Subset.antisymm hY'Y hYY'
      exact ⟨hYE, hYY'eq ▸ hY'f⟩
    · intro hmem
      obtain ⟨hYE, hYf⟩ := hmem
      refine ⟨hYE, sub.rel.mpr ⟨hYE, hYE, Y, ⟨hYE, hYf⟩, subset_rfl, subset_rfl⟩⟩
  · rfl

theorem isFinitaryProjection_of_sub_eq_self {f : ApproximableMap E E} (h : sub f = f)
    :
    FinitaryProjection f := by
  rw [← h]
  exact Subsystem.isFinitaryProjection_retractionOfSubsystem (fixedNbhd_subsystem f)

theorem sub_le (f : ApproximableMap E E) : sub f ≤ f := by
  rintro X Z hr
  obtain ⟨hX, hZ, Y, ⟨hYE, hYf⟩, hXY, hYZ⟩ := sub.rel.mp hr
  have h1 : f.rel X Y := f.mono hYf hXY subset_rfl hX hYE
  exact f.mono h1 subset_rfl hYZ hX hZ

theorem sub_eq_self_of_isFinitaryProjection {f : ApproximableMap E E}
    (h : FinitaryProjection f) : sub f = f := by
  apply ApproximableMap.ext
```

```
  intro X Z
  constructor
  · exact sub_le f X Z
  · intro hXZ
    have hX : E.mem X := f.rel_dom hXZ
    have hZ : E.mem Z := f.rel_cod hXZ
    have hmem : (f.toElementMap (E.principal hX)).mem Z := (f.rel_iff_mem_principal hX
    ).mp hXZ
    obtain ⟨-, W, hW, hWZ, hWf⟩ := (formula_of_isFinitaryProjection h (E.principal hX))
    .mp hmem
    obtain ⟨hWE, hXW⟩ := (E.mem_principal hX).mp hW
    exact sub.rel.mpr ⟨hX, hZ, W, ⟨hWE, hWf⟩, hXW, hWZ⟩

theorem sub_eq_self_iff_isFinitaryProjection {f : ApproximableMap E E} :
    sub f = f ↔ FinitaryProjection f :=
  ⟨isFinitaryProjection_of_sub_eq_self, sub_eq_self_of_isFinitaryProjection⟩

theorem sub_sub (f : ApproximableMap E E) : sub (sub f) = sub f := by
  unfold sub
  congr 1
  exact fixedNbhd_sub f

theorem isFinitaryProjection_sub (f : ApproximableMap E E) : FinitaryProjection (sub f
    ) :=
  isFinitaryProjection_of_sub_eq_self (sub_sub f)

end DomainTheory.NeighbourhoodSystems
```

subApprox.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.sub
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Proposition_6_11
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_13
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_24

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
universe u
variable {α : Type u} {E : NeighborhoodSystem α}

namespace Sub8_6

def subFilter (φ : (funSpace E E).Element) : (funSpace E E).Element :=
  toFilter (sub (toApproxMap φ))

theorem toApproxMap_monotone {φ ψ : (funSpace E E).Element} (h : φ ≤ ψ) :
    toApproxMap φ ≤ toApproxMap ψ := by
  have := (funSpaceEquiv E E).monotone h
```

```
  simpa using this

theorem subFilter_mono {φ ψ : (funSpace E E).Element} (h : φ ≤ ψ) : subFilter φ ≤
    subFilter ψ :=
  toFilter_le_iff.mpr (sub.mono (toApproxMap_monotone h))

theorem subFilter_monotone : Monotone (subFilter (E := E)) := fun _ _ h =>
    subFilter_mono h

theorem toApproxMap_rel_iSupDirected {I : Type u} [Nonempty I] (φ : I → (funSpace E E)
    .Element)
    (hdir : ∀ i j, ∃ k, φ i ≤ φ k ∧ φ j ≤ φ k) {X Z : Set α} :
    (toApproxMap (iSupDirected φ hdir)).rel X Z ↔ ∃ i, (toApproxMap (φ i)).rel X Z :=
    by
  simp only [toApproxMap_rel, mem_iSupDirected]

theorem sub_toApproxMap_iSupDirected {I : Type u} [Nonempty I] (φ : I → (funSpace E E)
    .Element)
    (hdir : ∀ i j, ∃ k, φ i ≤ φ k ∧ φ j ≤ φ k) {X Z : Set α} :
    (sub (toApproxMap (iSupDirected φ hdir))).rel X Z ↔
      ∃ i, (sub (toApproxMap (φ i))).rel X Z := by
  simp only [sub.rel, toApproxMap_rel_iSupDirected]
  constructor
  · rintro ⟨hX, hZ, Y, ⟨hYE, i, hYi⟩, hXY, hYZ⟩
    exact ⟨i, hX, hZ, Y, ⟨hYE, hYi⟩, hXY, hYZ⟩
  · rintro ⟨i, hX, hZ, Y, ⟨hYE, hYi⟩, hXY, hYZ⟩
    exact ⟨hX, hZ, Y, ⟨hYE, i, hYi⟩, hXY, hYZ⟩

theorem toApproxMap_toFilter (f : ApproximableMap E E) : toApproxMap (toFilter f) = f
    :=
  (funSpaceEquiv E E).right_inv f

theorem toApproxMap_subFilter (φ : (funSpace E E).Element) :
    toApproxMap (subFilter φ) = sub (toApproxMap φ) :=
  toApproxMap_toFilter _

theorem toFilter_toApproxMap (φ : (funSpace E E).Element) : toFilter (toApproxMap φ) =
    φ :=
  (funSpaceEquiv E E).left_inv φ

theorem toApproxMap_injective {φ ψ : (funSpace E E).Element} (h : toApproxMap φ =
    toApproxMap ψ) :
    φ = ψ := by
  rw [← toFilter_toApproxMap φ, ← toFilter_toApproxMap ψ, h]

theorem subFilter_iSupDirected {I : Type u} [Nonempty I] (φ : I → (funSpace E E).
    Element)
    (hdir : ∀ i j, ∃ k, φ i ≤ φ k ∧ φ j ≤ φ k)
    (hdir' : ∀ i j, ∃ k, subFilter (φ i) ≤ subFilter (φ k) ∧ subFilter (φ j) ≤
    subFilter (φ k)) :
    subFilter (iSupDirected φ hdir) = iSupDirected (fun i => subFilter (φ i)) hdir' :=
    by
  apply toApproxMap_injective
  rw [toApproxMap_subFilter]
  apply ApproximableMap.ext
  intro X Z
```

```
  rw [sub_toApproxMap_iSupDirected, toApproxMap_rel_iSupDirected]
  simp only [toApproxMap_subFilter]

theorem continuous_subFilter : Continuous (subFilter (E := E)) :=
  continuous_of_monotone_iSupDirected subFilter_monotone subFilter_iSupDirected

end Sub8_6

def subApprox : ApproximableMap (funSpace E E) (funSpace E E) :=
  ofContinuous Sub8_6.subFilter Sub8_6.continuous_subFilter

namespace subApprox

theorem toElementMap_eq (φ : (funSpace E E).Element) :
    ApproximableMap.toElementMap subApprox φ = Sub8_6.subFilter φ :=
  toElementMap_ofContinuous Sub8_6.subFilter Sub8_6.continuous_subFilter φ

def fixIso :
    {φ : (funSpace E E).Element // ApproximableMap.toElementMap subApprox φ = φ} ≃o
      {f : ApproximableMap E E // sub f = f} where
  toFun φ := ⟨toApproxMap φ.1, by
    have h1 : Sub8_6.subFilter φ.1 = φ.1 := (toElementMap_eq φ.1).symm.trans φ.2
    have h2 : toApproxMap (Sub8_6.subFilter φ.1) = toApproxMap φ.1 := congrArg
    toApproxMap h1
    rwa [Sub8_6.toApproxMap_subFilter] at h2⟩
  invFun f := ⟨toFilter f.1, by
    rw [toElementMap_eq]
    show Sub8_6.subFilter (toFilter f.1) = toFilter f.1
    unfold Sub8_6.subFilter
    rw [Sub8_6.toApproxMap_toFilter, f.2]⟩
  left_inv φ := Subtype.ext (Sub8_6.toFilter_toApproxMap φ.1)
  right_inv f := Subtype.ext (Sub8_6.toApproxMap_toFilter f.1)
  map_rel_iff' := by
    intro φ ψ
    show toApproxMap φ.1 ≤ toApproxMap ψ.1 ↔ φ.1 ≤ ψ.1
    exact (funSpaceEquiv E E).map_rel_iff

theorem isFinitary : IsFinitary (subApprox (E := E)) :=
  ⟨_, _, ⟨fixIso.trans
    ((finitaryProjectionSubsystemEquiv E).trans (Proposition611.subsystemReprIso E))⟩⟩

end subApprox

namespace Sub8_6

theorem subApprox_le_idMap : subApprox ≤ idMap (funSpace E E) := by
  rw [le_iff_toElementMap_le]
  intro φ
  rw [subApprox.toElementMap_eq, toElementMap_idMap]
  calc subFilter φ = toFilter (sub (toApproxMap φ)) := rfl
    _ ≤ toFilter (toApproxMap φ) := toFilter_le_iff.mpr (sub_le _)
    _ = φ := toFilter_toApproxMap φ

end Sub8_6

namespace Sub8_6
```

```
theorem subFilter_subFilter (φ : (funSpace E E).Element) :
    subFilter (subFilter φ) = subFilter φ := by
  unfold subFilter
  rw [toApproxMap_toFilter, sub_sub]

theorem subApprox.toElementMap_eq_comp (φ : (funSpace E E).Element) :
    (subApprox.comp subApprox).toElementMap φ = subApprox.toElementMap φ := by
  rw [toElementMap_comp]
  simp only [subApprox.toElementMap_eq]
  exact subFilter_subFilter φ

theorem isRetraction_subApprox : Retraction (subApprox (E := E)) :=
  ⟨le_antisymm (le_iff_toElementMap_le.mpr fun φ => (subApprox.toElementMap_eq_comp φ).
    le)
    (le_iff_toElementMap_le.mpr fun φ => (subApprox.toElementMap_eq_comp φ).ge)⟩

theorem isProjection_subApprox : IsProjection (subApprox (E := E)) :=
  ⟨isRetraction_subApprox, subApprox_le_idMap⟩

theorem isFinitaryProjection_subApprox : FinitaryProjection (subApprox (E := E)) :=
  ⟨⟨isProjection_subApprox, subApprox.isFinitary⟩⟩

end Sub8_6

section
open NeighborhoodSystem Domain.Recursive ApproximableMap Sub8_6
variable {α : Type*} {E : NeighborhoodSystem α}

theorem subApprox_rel_iff {F G : Set (ApproximableMap E E)} (hF : (funSpace E E).mem F
    ) :
    (subApprox (E := E)).rel F G ↔
      (funSpace E E).mem G ∧ sub (toApproxMap ((funSpace E E).principal hF)) ∈ G :=
  ⟨fun ⟨_, hG, hmem⟩ => ⟨hG, hmem⟩, fun ⟨hG, hmem⟩ => ⟨hF, hG, hmem⟩⟩

section SubComputable

variable (P : ComputablePresentation E) (gN : ℕ → ℕ)
  (hgN : ∀ c, gN c = 1 ↔
    (stepFun (funListOf P P (decodeList c)) : Set (ApproximableMap E E)).Nonempty)

theorem subApprox_rel_Xenum_iff (n m : ℕ) :
    (subApprox (E := E)).rel (Xenum P P gN n) (Xenum P P gN m) ↔
      gN m = 1 → ∀ e ∈ decodeList m,
        (sub (toApproxMap ((funSpace E E).principal (Xenum_mem P P gN hgN n)))).rel
          (P.X e.unpair.1) (P.X e.unpair.2) := by
  rw [subApprox_rel_iff (Xenum_mem P P gN hgN n), and_iff_right (Xenum_mem P P gN hgN
    m)]
  exact mem_Xenum_iff_map P P gN _ m

theorem subStep_recDecidable (fincl incl : ℕ → ℕ)
    (hfincl : ∀ s, fincl s = 1 ↔ Xenum P P gN s.unpair.1 ⊆ Xenum P P gN s.unpair.2)
    (hfinclp : Nat.Primrec fincl)
    (hincl : ∀ s, incl s = 1 ↔ P.X s.unpair.1 ⊆ P.X s.unpair.2) (hinclp : Nat.Primrec
     incl) :
    RecDecidable (fun w : ℕ =>
```

```
      Xenum P P gN w.unpair.2.unpair.1 ⊆ Xenum P P gN (codePair w.unpair.1 w.unpair.1)
    ∧
       P.X w.unpair.2.unpair.2.unpair.1 ⊆ P.X w.unpair.1 ∧
         P.X w.unpair.1 ⊆ P.X w.unpair.2.unpair.2.unpair.2) := by
  have hy : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hn : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have he1 : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have he2 : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hcodeYY : Nat.Primrec (fun w : ℕ => codePair w.unpair.1 w.unpair.1) :=
    Nat.Primrec.succ.comp ((hy.pair hy).pair (Nat.Primrec.const 0))
  have h1 : RecDecidable (fun w : ℕ =>
      Xenum P P gN w.unpair.2.unpair.1 ⊆ Xenum P P gN (codePair w.unpair.1 w.unpair.1)
    ) :=
    ⟨fun w => fincl (Nat.pair w.unpair.2.unpair.1 (codePair w.unpair.1 w.unpair.1)),
      hfinclp.comp (hn.pair hcodeYY), fun w => by
        rw [hfincl]; simp only [unpair_pair_fst, unpair_pair_snd]⟩
  have h2 : RecDecidable (fun w : ℕ => P.X w.unpair.2.unpair.2.unpair.1 ⊆ P.X w.unpair
    .1) :=
    ⟨fun w => incl (Nat.pair w.unpair.2.unpair.2.unpair.1 w.unpair.1), hinclp.comp (he1
    .pair hy),
      fun w => by rw [hincl]; simp only [unpair_pair_fst, unpair_pair_snd]⟩
  have h3 : RecDecidable (fun w : ℕ => P.X w.unpair.1 ⊆ P.X w.unpair.2.unpair.2.unpair
    .2) :=
    ⟨fun w => incl (Nat.pair w.unpair.1 w.unpair.2.unpair.2.unpair.2), hinclp.comp (hy.
    pair he2),
      fun w => by rw [hincl]; simp only [unpair_pair_fst, unpair_pair_snd]⟩
  exact h1.and (h2.and h3)

theorem sub_rel_iff_exists_index {f : ApproximableMap E E} {a b : ℕ} :
    (sub f).rel (P.X a) (P.X b) ↔
      ∃ y : ℕ, f.rel (P.X y) (P.X y) ∧ P.X a ⊆ P.X y ∧ P.X y ⊆ P.X b := by
  rw [sub.rel, and_iff_right (P.mem_X a), and_iff_right (P.mem_X b)]
  constructor
  · rintro ⟨Y, ⟨hYE, hYf⟩, haY, hYb⟩
    obtain ⟨y, rfl⟩ := P.surj hYE
    exact ⟨y, hYf, haY, hYb⟩
  · rintro ⟨y, hYf, haY, hYb⟩
    exact ⟨P.X y, ⟨P.mem_X y, hYf⟩, haY, hYb⟩

theorem sub_leastMap_rel_iff (n a b : ℕ) :
    (sub (toApproxMap ((funSpace E E).principal (Xenum_mem P P gN hgN n)))).rel
        (P.X a) (P.X b) ↔
      ∃ y : ℕ, Xenum P P gN n ⊆ Xenum P P gN (codePair y y) ∧
        P.X a ⊆ P.X y ∧ P.X y ⊆ P.X b := by
  rw [sub_rel_iff_exists_index P]
  refine exists_congr (fun y => ?_)
  rw [leastMap_Xenum_rel P gN hgN n y y, Xenum_codePair P gN hgN y y]

theorem subApprox_isComputable
    (incl eq : ℕ → ℕ)
    (hgNp : Nat.Primrec gN)
    (hincl : ∀ s, incl s = 1 ↔ P.X s.unpair.1 ⊆ P.X s.unpair.2) (hinclp : Nat.Primrec
     incl)
```

```
    (heq : ∀ s, eq s = 1 ↔ P.X s.unpair.1 = P.X s.unpair.2) (heqp : Nat.Primrec eq) :
    ComputableMap
      (funPresentation P P gN incl incl eq hgN hgNp hincl hinclp hincl hinclp heq heqp
    )
      (funPresentation P P gN incl incl eq hgN hgNp hincl hinclp hincl hinclp heq heqp
    )
      (subApprox (E := E)) := by
  constructor
  obtain ⟨fincl, hfinclp, hfincls⟩ :=
    (funPresentation P P gN incl incl eq hgN hgNp hincl hinclp hincl hinclp heq heqp).
    incl_computable
  have hfincl : ∀ s, fincl s = 1 ↔ Xenum P P gN s.unpair.1 ⊆ Xenum P P gN s.unpair.2
    :=
    fun s => (hfincls s).symm
  show REPred₂ (fun n m => (subApprox (E := E)).rel (Xenum P P gN n) (Xenum P P gN m))
  have hdec := subStep_recDecidable P gN fincl incl hfincl hfinclp hincl hinclp
  have hre : REPred₂ (fun n e => ∃ y : ℕ,
      Xenum P P gN n ⊆ Xenum P P gN (codePair y y) ∧
        P.X e.unpair.1 ⊆ P.X y ∧ P.X y ⊆ P.X e.unpair.2) := by
    refine REPred.of_iff (fun t => ?_) hdec.re.proj
    simp only [unpair_pair_fst, unpair_pair_snd]
  have hforall : REPred (fun t => ∀ e ∈ decodeList t.unpair.2, ∃ y : ℕ,
      Xenum P P gN t.unpair.1 ⊆ Xenum P P gN (codePair y y) ∧
        P.X e.unpair.1 ⊆ P.X y ∧ P.X y ⊆ P.X e.unpair.2) :=
    REPred.forall_mem_decodeList₂ hre
  have hne1 : REPred (fun t => ¬ gN t.unpair.2 = 1) :=
    ((RecDecidable.natEq (hgNp.comp Nat.Primrec.right) (Nat.Primrec.const 1)).not).re
  refine REPred.of_iff (fun t => ?_) (hne1.or hforall)
  show (subApprox (E := E)).rel (Xenum P P gN t.unpair.1) (Xenum P P gN t.unpair.2) ↔
    _
  rw [subApprox_rel_Xenum_iff P gN hgN t.unpair.1 t.unpair.2, Decidable.imp_iff_not_or
    ]
  refine or_congr_right (forall_congr' (fun e => imp_congr_right (fun _ => ?_)))
  exact sub_leastMap_rel_iff P gN hgN t.unpair.1 e.unpair.1 e.unpair.2

end SubComputable

theorem sub_isComputable_of_isEffectivelyGiven (h : E.IsEffectivelyGiven) :
    ∃ Pfun : ComputablePresentation (funSpace E E),
      ComputableMap Pfun Pfun (subApprox (E := E)) := by
  obtain ⟨P⟩ := h
  obtain ⟨incl, hinclp, hincls⟩ := P.incl_computable
  obtain ⟨eq, heqp, heqs⟩ := P.eq_computable
  obtain ⟨fc, hfcp, hfcs⟩ := P.cons_computable
  have hincl' : ∀ s, incl s = 1 ↔ P.X s.unpair.1 ⊆ P.X s.unpair.2 := fun s => (hincls
     s).symm
  have heq' : ∀ s, eq s = 1 ↔ P.X s.unpair.1 = P.X s.unpair.2 := fun s => (heqs s).
    symm
  have hgN : ∀ c, funConsChar P P fc fc c = 1 ↔
      (stepFun (funListOf P P (decodeList c)) : Set (ApproximableMap E E)).Nonempty :=
    fun c => funConsChar_spec P P fc fc (fun s => (hfcs s).symm) (fun s => (hfcs s).
    symm) c
  refine ⟨funPresentation P P (funConsChar P P fc fc) incl incl eq hgN
    (primrec_funConsChar P P fc fc hfcp hfcp) hincl' hinclp hincl' hinclp heq' heqp,
    subApprox_isComputable P (funConsChar P P fc fc) hgN incl eq
      (primrec_funConsChar P P fc fc hfcp hfcp) hincl' hinclp heq' heqp⟩
```

```
end

end DomainTheory.NeighbourhoodSystems
```

Theorem_8_6.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_24
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Proposition_6_11
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Exercise_2_13

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Examples_8_4
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.sub
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.subApprox
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.Yseq
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.U
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open Domain.Recursive NeighborhoodSystem
open Domain.Recursive NeighborhoodSystem
open Domain.Recursive NeighborhoodSystem
open Domain.Recursive NeighborhoodSystem
open Domain.Recursive NeighborhoodSystem
open Domain.Recursive NeighborhoodSystem
open Domain.Recursive NeighborhoodSystem
open Domain.Recursive NeighborhoodSystem
open Domain.Recursive NeighborhoodSystem
open Domain.Recursive NeighborhoodSystem
open Domain.Recursive NeighborhoodSystem

set_option linter.unusedVariables false

theorem theorem_86.{u} : And
  (And
    (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E},
      Iff
        (@Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E) (
   @DomainTheory.NeighbourhoodSystems.sub α E f)
          f)
        (@DomainTheory.NeighbourhoodSystems.FinitaryProjection α E f))
    (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α},
      @DomainTheory.NeighbourhoodSystems.IsFinitary (@DomainTheory.
```

```
    NeighbourhoodSystems.ApproximableMap α α E E)
         (@DomainTheory.NeighbourhoodSystems.funSpace α α E E)
         (@DomainTheory.NeighbourhoodSystems.subApprox α E)))
  (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α},
    @DomainTheory.NeighbourhoodSystems.FinitaryProjection (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α E E)
      (@DomainTheory.NeighbourhoodSystems.funSpace α α E E) (@DomainTheory.
    NeighbourhoodSystems.subApprox α E)) :=
  @And.intro
  (And
    (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E},
      Iff
        (@Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E) (
    @DomainTheory.NeighbourhoodSystems.sub α E f)
          f)
        (@DomainTheory.NeighbourhoodSystems.FinitaryProjection α E f))
    (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α},
      @DomainTheory.NeighbourhoodSystems.IsFinitary (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α E E)
         (@DomainTheory.NeighbourhoodSystems.funSpace α α E E)
         (@DomainTheory.NeighbourhoodSystems.subApprox α E)))
  (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α},
    @DomainTheory.NeighbourhoodSystems.FinitaryProjection (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α E E)
      (@DomainTheory.NeighbourhoodSystems.funSpace α α E E) (@DomainTheory.
    NeighbourhoodSystems.subApprox α E))
  (@And.intro
    (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      {f : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E},
      Iff
        (@Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E) (
    @DomainTheory.NeighbourhoodSystems.sub α E f)
          f)
        (@DomainTheory.NeighbourhoodSystems.FinitaryProjection α E f))
    (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α},
      @DomainTheory.NeighbourhoodSystems.IsFinitary (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α E E)
         (@DomainTheory.NeighbourhoodSystems.funSpace α α E E) (@DomainTheory.
    NeighbourhoodSystems.subApprox α E))
    @DomainTheory.NeighbourhoodSystems.sub_eq_self_iff_isFinitaryProjection
    @DomainTheory.NeighbourhoodSystems.subApprox.isFinitary)
  @DomainTheory.NeighbourhoodSystems.Sub8_6.isFinitaryProjection_subApprox

set_option linter.unusedVariables false

theorem theorem_86_c.{u_1} : And
  (∀ {α : Type u_1} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α E) (gN : Nat →
    Nat)
    (hgN :
      ∀ (c : Nat),
        Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
          (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E)
            (@DomainTheory.NeighbourhoodSystems.stepFun α α E E
              (@DomainTheory.NeighbourhoodSystems.funListOf α α E E P P (Domain.
```

```
  Recursive.decodeList c)))))
  (incl eq : Nat → Nat) (hgNp : Nat.Primrec gN)
  (hincl :
    ∀ (s : Nat),
      Iff (@Eq Nat (incl s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))
  ))
        (@LE.le (Set α) (@Set.instLE α)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α E P (@Prod.
  fst Nat Nat (Nat.unpair s)))
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α E P (@Prod.
  snd Nat Nat (Nat.unpair s)))))
  (hinclp : Nat.Primrec incl)
  (heq :
    ∀ (s : Nat),
      Iff (@Eq Nat (eq s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
        (@Eq (Set α)
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α E P (@Prod.
  fst Nat Nat (Nat.unpair s)))
          (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α E P (@Prod.
  snd Nat Nat (Nat.unpair s)))))
  (heqp : Nat.Primrec eq),
  @DomainTheory.NeighbourhoodSystems.ComputableMap (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α E E)
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E) (@DomainTheory.
  NeighbourhoodSystems.funSpace α α E E)
    (@DomainTheory.NeighbourhoodSystems.funSpace α α E E)
    (@DomainTheory.NeighbourhoodSystems.funPresentation α α E E P P gN incl incl eq
  hgN hgNp hincl hinclp hincl hinclp
      heq heqp)
    (@DomainTheory.NeighbourhoodSystems.funPresentation α α E E P P gN incl incl eq
  hgN hgNp hincl hinclp hincl hinclp
      heq heqp)
    (@DomainTheory.NeighbourhoodSystems.subApprox α E))
(∀ {α : Type u_1} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α},
  @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α E →
    ∃ (Pfun :
      @DomainTheory.NeighbourhoodSystems.ComputablePresentation
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E)
        (@DomainTheory.NeighbourhoodSystems.funSpace α α E E)),
      @DomainTheory.NeighbourhoodSystems.ComputableMap (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α E E)
        (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E)
        (@DomainTheory.NeighbourhoodSystems.funSpace α α E E) (@DomainTheory.
  NeighbourhoodSystems.funSpace α α E E)
        Pfun Pfun (@DomainTheory.NeighbourhoodSystems.subApprox α E)) :=
@And.intro
(∀ {α : Type u_1} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (P : @DomainTheory.NeighbourhoodSystems.ComputablePresentation α E) (gN : Nat →
  Nat)
  (hgN :
    ∀ (c : Nat),
      Iff (@Eq Nat (gN c) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
        (@Set.Nonempty (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E)
          (@DomainTheory.NeighbourhoodSystems.stepFun α α E E
            (@DomainTheory.NeighbourhoodSystems.funListOf α α E E P P (Domain.
  Recursive.decodeList c)))))
```

```
    (incl eq : Nat → Nat) (hgNp : Nat.Primrec gN)
    (hincl :
      ∀ (s : Nat),
        Iff (@Eq Nat (incl s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))
    ))
          (@LE.le (Set α) (@Set.instLE α)
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α E P (@Prod.
    fst Nat Nat (Nat.unpair s)))
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α E P (@Prod.
    snd Nat Nat (Nat.unpair s)))))
    (hinclp : Nat.Primrec incl)
    (heq :
      ∀ (s : Nat),
        Iff (@Eq Nat (eq s) (@OfNat.ofNat Nat (nat_lit 1) (instOfNatNat (nat_lit 1))))
          (@Eq (Set α)
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α E P (@Prod.
    fst Nat Nat (Nat.unpair s)))
            (@DomainTheory.NeighbourhoodSystems.ComputablePresentation.X α E P (@Prod.
    snd Nat Nat (Nat.unpair s)))))
    (heqp : Nat.Primrec eq),
    @DomainTheory.NeighbourhoodSystems.ComputableMap (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α E E)
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E) (@DomainTheory.
    NeighbourhoodSystems.funSpace α α E E)
      (@DomainTheory.NeighbourhoodSystems.funSpace α α E E)
      (@DomainTheory.NeighbourhoodSystems.funPresentation α α E E P P gN incl incl eq
    hgN hgNp hincl hinclp hincl hinclp
        heq heqp)
      (@DomainTheory.NeighbourhoodSystems.funPresentation α α E E P P gN incl incl eq
    hgN hgNp hincl hinclp hincl hinclp
        heq heqp)
      (@DomainTheory.NeighbourhoodSystems.subApprox α E))
  (∀ {α : Type u_1} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α},
    @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.IsEffectivelyGiven α E →
      ∃ (Pfun :
        @DomainTheory.NeighbourhoodSystems.ComputablePresentation
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E)
          (@DomainTheory.NeighbourhoodSystems.funSpace α α E E)),
        @DomainTheory.NeighbourhoodSystems.ComputableMap (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α E E)
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E)
          (@DomainTheory.NeighbourhoodSystems.funSpace α α E E) (@DomainTheory.
    NeighbourhoodSystems.funSpace α α E E)
          Pfun Pfun (@DomainTheory.NeighbourhoodSystems.subApprox α E))
  @DomainTheory.NeighbourhoodSystems.subApprox_isComputable
  @DomainTheory.NeighbourhoodSystems.sub_isComputable_of_isEffectivelyGiven

variable {α : Type*}

section Reencode

variable (e : ℕ → Set α)

def idxSet (n : ℕ) : Set ℕ := {m | e m ⊆ e n}

@[simp] theorem mem_idxSet {m n : ℕ} : m ∈ idxSet e n ↔ e m ⊆ e n := Iff.rfl
```

```
end Reencode

section Setup

variable (D : NeighborhoodSystem α) (e : ℕ → Set α)
  (hcover : ∀ S, D.mem S ↔ ∃ n, S = e n) (he0 : e 0 = D.master)

include hcover in

theorem D_mem_e (n : ℕ) : D.mem (e n) := (hcover (e n)).mpr ⟨n, rfl⟩

noncomputable abbrev Yidx (n : ℕ) : Set ? := Yseq splitChoice (idxSet e) Set.univ n

include hcover in
theorem e_subset_master (n : ℕ) : e n ⊆ D.master := D.sub_master (D_mem_e D e hcover n
    )

end Setup

section Reencode

variable (e : ℕ → Set α)

theorem idxSet_inter_of_inter_eq {i j m : ℕ} (h : e i ∩ e j = e m) :
    idxSet e i ∩ idxSet e j = idxSet e m := by
  ext k
  show e k ⊆ e i ∧ e k ⊆ e j ↔ e k ⊆ e m
  rw [← Set.subset_inter_iff, h]

theorem idxSet_zero_eq_univ {n0 : ℕ} (hsub : ∀ m, e m ⊆ e n0) : idxSet e n0 = Set.univ
    :=
  Set.eq_univ_of_forall hsub

end Reencode

section Setup

variable (D : NeighborhoodSystem α) (e : ℕ → Set α)
  (hcover : ∀ S, D.mem S ↔ ∃ n, S = e n) (he0 : e 0 = D.master)

include hcover he0 in
theorem idxSet_zero : idxSet e 0 = Set.univ :=
  idxSet_zero_eq_univ e (fun m => he0 ▸ e_subset_master D e hcover m)

end Setup

section Reencode

variable (e : ℕ → Set α)

theorem self_mem_idxSet (n : ℕ) : n ∈ idxSet e n := show e n ⊆ e n from subset_rfl

theorem idxSet_subset_iff (i j : ℕ) : idxSet e i ⊆ idxSet e j ↔ e i ⊆ e j :=
  ⟨fun h => h (self_mem_idxSet e i), fun h _ hm => hm.trans h⟩
```

```
end Reencode

section Setup

variable (D : NeighborhoodSystem α) (e : ℕ → Set α)
  (hcover : ∀ S, D.mem S ↔ ∃ n, S = e n) (he0 : e 0 = D.master)

theorem univ_nonempty_nat : (Set.univ : Set ℕ).Nonempty := ⟨0, trivial⟩

theorem Yidx_empty_or_mem (n : ℕ) : Yidx e n = ∅ ∨ U.mem (Yidx e n) :=
  Yseq_empty_or_mem splitChoice (idxSet e) Set.univ univ_nonempty_nat
    splitChoice_isSplitSpec n

theorem Yidx_nonempty (n : ℕ) : (Yidx e n).Nonempty :=
  Yseq_nonempty_of_mem splitChoice (idxSet e) Set.univ univ_nonempty_nat
    splitChoice_isSplitSpec
    (Set.mem_univ n) (self_mem_idxSet e n)

theorem Yidx_mem (n : ℕ) : U.mem (Yidx e n) :=
  (Yidx_empty_or_mem e n).resolve_left (Yidx_nonempty e n).ne_empty

theorem Yidx_subset_master (n : ℕ) : Yidx e n ⊆ U.master :=
  Yseq_subset_master splitChoice (idxSet e) Set.univ univ_nonempty_nat
    splitChoice_isSplitSpec n

include hcover he0 in

theorem Yidx_zero : Yidx e 0 = U.master :=
  Yseq_zero_eq_master splitChoice (idxSet e) Set.univ univ_nonempty_nat
    splitChoice_isSplitSpec
    (idxSet_zero D e hcover he0)

theorem embed_subset_iff (i j : ℕ) : e i ⊆ e j ↔ Yidx e i ⊆ Yidx e j := by
  rw [← idxSet_subset_iff e i j]
  have := transfer_subset_iff splitChoice (idxSet e) Set.univ univ_nonempty_nat
    splitChoice_isSplitSpec i j
  rwa [Set.univ_inter, Set.inter_eq_self_of_subset_right (Yidx_subset_master e i)] at
    this

theorem embed_eq_iff (i j : ℕ) : e i = e j ↔ Yidx e i = Yidx e j :=
  ⟨fun h => Set.Subset.antisymm ((embed_subset_iff e i j).mp h.subset)
      ((embed_subset_iff e j i).mp h.symm.subset),
    fun h => Set.Subset.antisymm ((embed_subset_iff e i j).mpr h.subset)
      ((embed_subset_iff e j i).mpr h.symm.subset)⟩

end Setup

section Subsystem

variable (D : NeighborhoodSystem α) (e : ℕ → Set α)
  (hcover : ∀ S, D.mem S ↔ ∃ n, S = e n) (he0 : e 0 = D.master)

include hcover in

theorem exists_inter_index_of_dmem {i j : ℕ} (hDij : D.mem (e i ∩ e j)) :
    ∃ m, e i ∩ e j = e m ∧ Yidx e i ∩ Yidx e j = Yidx e m := by
```

```
  obtain ⟨m, hm⟩ := (hcover (e i ∩ e j)).mp hDij
  exact ⟨m, hm, (transfer_inter_eq_iff splitChoice (idxSet e) Set.univ
    univ_nonempty_nat
    splitChoice_isSplitSpec i j m
    (Set.subset_univ _) (Set.subset_univ _) (Set.subset_univ _)).mp (
    idxSet_inter_of_inter_eq e hm)⟩

noncomputable def DprimeU : NeighborhoodSystem ? where
  mem Y := ∃ n, Y = Yidx e n
  master := U.master
  master_nonempty := U.master_nonempty
  master_mem := ⟨0, (Yidx_zero D e hcover he0).symm⟩
  sub_master := by rintro Y ⟨n, rfl⟩; exact Yidx_subset_master e n
  inter_mem := by
    rintro X Y Z ⟨i, rfl⟩ ⟨j, rfl⟩ ⟨k, rfl⟩ hZsub
    have h1 : e k ⊆ e i := (embed_subset_iff e k i).mpr (hZsub.trans Set.
    inter_subset_left)
    have h2 : e k ⊆ e j := (embed_subset_iff e k j).mpr (hZsub.trans Set.
    inter_subset_right)
    obtain ⟨m, -, hYeq⟩ := exists_inter_index_of_dmem D e hcover
      (D.inter_mem (D_mem_e D e hcover i) (D_mem_e D e hcover j) (D_mem_e D e hcover k
    )
        (Set.subset_inter h1 h2))
    exact ⟨m, hYeq⟩

include hcover in

theorem exists_inter_index_of_nonempty {i j : ℕ} (hne : (Yidx e i ∩ Yidx e j).Nonempty
    ) :
    ∃ m, e i ∩ e j = e m ∧ Yidx e i ∩ Yidx e j = Yidx e m := by
  have hne' : (idxSet e i ∩ idxSet e j).Nonempty := by
    by_contra hcon
    rw [Set.not_nonempty_iff_eq_empty] at hcon
    have hkey := transfer_inter_empty_iff splitChoice (idxSet e) Set.univ
    univ_nonempty_nat
      splitChoice_isSplitSpec i j
    rw [Set.univ_inter, Set.inter_eq_self_of_subset_right (Yidx_subset_master e i)] at
     hkey
    exact hne.ne_empty (hkey.mp hcon)
  obtain ⟨k, hki, hkj⟩ := hne'
  exact exists_inter_index_of_dmem D e hcover
    (D.inter_mem (D_mem_e D e hcover i) (D_mem_e D e hcover j) (D_mem_e D e hcover k)
      (Set.subset_inter hki hkj))

include hcover he0 in

theorem DprimeU_subsystem : DprimeU D e hcover he0 ? U where
  master_eq := rfl
  sub := by rintro Y ⟨n, rfl⟩; exact Yidx_mem e n
  inter_closed := by
    rintro X Y ⟨i, rfl⟩ ⟨j, rfl⟩ hUmem
    obtain ⟨m, -, hYeq⟩ := exists_inter_index_of_nonempty D e hcover hUmem.2.1
    exact ⟨m, hYeq⟩

end Subsystem
```

```
section Iso

variable (D : NeighborhoodSystem α) (e : ℕ → Set α)
  (hcover : ∀ S, D.mem S ↔ ∃ n, S = e n) (he0 : e 0 = D.master)

def toD (y : (DprimeU D e hcover he0).Element) : D.Element where
  mem S := ∃ n, S = e n ∧ y.mem (Yidx e n)
  sub := fun ⟨n, hn, _⟩ => hn ▸ D_mem_e D e hcover n
  master_mem := ⟨0, he0.symm, by rw [Yidx_zero D e hcover he0]; exact y.master_mem⟩
  inter_mem := by
    rintro S T ⟨i, rfl, hyi⟩ ⟨j, rfl, hyj⟩
    have hD'mem : (DprimeU D e hcover he0).mem (Yidx e i ∩ Yidx e j) := y.sub (y.
    inter_mem hyi hyj)
    obtain ⟨m, hem, hYeq⟩ := exists_inter_index_of_nonempty D e hcover
      ((DprimeU_subsystem D e hcover he0).sub hD'mem).2.1
    exact ⟨m, hem, hYeq ▸ y.inter_mem hyi hyj⟩
  up_mem := by
    rintro S T ⟨i, rfl, hyi⟩ hDT hST
    obtain ⟨j, rfl⟩ := (hcover T).mp hDT
    have hYij : Yidx e i ⊆ Yidx e j := (embed_subset_iff e i j).mp hST
    exact ⟨j, rfl, y.up_mem hyi ⟨j, rfl⟩ hYij⟩

def toDprimeU (x : D.Element) : (DprimeU D e hcover he0).Element where
  mem Y := ∃ n, Y = Yidx e n ∧ x.mem (e n)
  sub := fun ⟨n, hn, _⟩ => ⟨n, hn⟩
  master_mem := ⟨0, (Yidx_zero D e hcover he0).symm, by rw [he0]; exact x.master_mem⟩
  inter_mem := by
    rintro X Y ⟨i, rfl, hxi⟩ ⟨j, rfl, hxj⟩
    obtain ⟨m, hem, hYeq⟩ :=
      exists_inter_index_of_dmem D e hcover (x.sub (x.inter_mem hxi hxj))
    exact ⟨m, hYeq, hem ▸ x.inter_mem hxi hxj⟩
  up_mem := by
    rintro X Y ⟨i, rfl, hxi⟩ ⟨j, rfl⟩ hXY
    have heij : e i ⊆ e j := (embed_subset_iff e i j).mpr hXY
    exact ⟨j, rfl, x.up_mem hxi (D_mem_e D e hcover j) heij⟩

noncomputable def domainIso : DomainIso D (DprimeU D e hcover he0) where
  toFun := toDprimeU D e hcover he0
  invFun := toD D e hcover he0
  left_inv x := by
    apply Element.ext
    intro S
    constructor
    · rintro ⟨n, hn, k, hk, hxk⟩
      rw [hn, (embed_eq_iff e n k).mpr hk]
      exact hxk
    · intro hS
      obtain ⟨n, hn⟩ := (hcover S).mp (x.sub hS)
      refine ⟨n, hn, n, rfl, ?_⟩
      rwa [← hn]
  right_inv y := by
    apply Element.ext
    intro Y
    constructor
    · rintro ⟨n, hn, k, hk, hyk⟩
      rw [hn, (embed_eq_iff e n k).mp hk]
```

```
      exact hyk
    · intro hY
      obtain ⟨n, hn⟩ := y.sub hY
      refine ⟨n, hn, n, rfl, ?_⟩
      rwa [← hn]
  map_rel_iff' := by
    intro x x2
    constructor
    · intro hle S hxS
      obtain ⟨n, hn⟩ := (hcover S).mp (x.sub hxS)
      have hxn : x.mem (e n) := hn ▸ hxS
      obtain ⟨k, hk, hx2k⟩ := hle _ (⟨n, rfl, hxn⟩ : (toDprimeU D e hcover he0 x).mem (
    Yidx e n))
      rw [hn, (embed_eq_iff e n k).mpr hk]
      exact hx2k
    · intro hle Y hY
      obtain ⟨n, hn, hxn⟩ := hY


      exact ⟨n, hn, hle _ hxn⟩

end Iso

section Reencode

variable (e : ℕ → Set α)

theorem idxSet_eq_iff (i j : ℕ) : idxSet e i = idxSet e j ↔ e i = e j :=
  ⟨fun h => Set.Subset.antisymm ((idxSet_subset_iff e i j).mp h.subset)
      ((idxSet_subset_iff e j i).mp h.symm.subset),
    fun h => by rw [idxSet, idxSet, h]⟩

theorem idxSet_nonempty (n : ℕ) : (idxSet e n).Nonempty := ⟨n, self_mem_idxSet e n⟩

end Reencode

section Iso

variable (D : NeighborhoodSystem α) (e : ℕ → Set α)
  (hcover : ∀ S, D.mem S ↔ ∃ n, S = e n) (he0 : e 0 = D.master)

theorem isomorphic_DprimeU : D ≅? DprimeU D e hcover he0 := ⟨domainIso D e hcover he0⟩

end Iso

end DomainTheory.NeighbourhoodSystems
```

3.9.8 Definition 8.7 — interval presentation of U

DEFINITION 8.7. Let $\mathbb{Q}$ be the set of rational numbers, and let

$$[0,1) = \{q \in \mathbb{Q} \mid 0 \le q < 1\},$$

and similarly for $[r,s)$ for any $r < s$ in $\mathbb{Q}$. The neighbourhood system $\mathcal{U}$ over $[0,1)$ is the set of all non-empty finite unions of rational intervals $[r,s)$ with $0 \le r < s \le 1$. $\square$

A picture of a typical element of $\mathcal{U}$ could be drawn like this:



Note that any union can be taken as a *disjoint* union of the form

$$\bigcup_{i\leq n}[r_{2i}, r_{2i+1})$$

where $0 \leq r_0 < r_1 < r_2 < \cdots < r_{2n} < r_{2n+1} \leq 1$. (Hint: Any overlapping intervals or abutting intervals can always be combined into one long interval.) It is a most elementary exercise to show that, by virtue of this representation, the system $\mathcal{U}$ has a computable presentation. (Some isomorphic versions of $\mathcal{U}$ — equally effective — are recorded in the exercises.) Note that $\mathcal{U}$ has no minimal neighbourhoods: every set in $\mathcal{U}$ can be written as the union of two disjoint sets in $\mathcal{U}$. (Hint: Use the density of the ordering of $\mathbb{Q}$.) The significance of $\mathcal{U}$ can now be explained.

presentedIntervals.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    NeighborhoodSystem
public import Mathlib.Algebra.Order.Ring.Unbundled.Rat
public import Mathlib.Order.SetNotation
public import Mathlib.Order.Interval.Set.Defs

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

def presentedIntervals (L : List (? × ?)) : Set ? := ⋃ p ∈ L, Set.Ico p.1 p.2

def clip (p : ? × ?) : ? × ? := (p.1 ⊔ 0, p.2 ⊓ 1)

def clipGe (m : ?) (p : ? × ?) : ? × ? := (p.1 ⊔ m, p.2)

def clipLt (m : ?) (p : ? × ?) : ? × ? := (p.1, p.2 ⊓ m)

def combineIntervals (L1 L2 : List (? × ?)) : List (? × ?) :=
  L1.flatMap (fun p => L2.map (fun q => (p.1 ⊔ q.1, p.2 ⊓ q.2)))

theorem Ico_diff_Ico (a b c d : ?) :
    Set.Ico a b \ Set.Ico c d = Set.Ico a (b ⊓ c) ∪ Set.Ico (a ⊔ d) b := by
  ext x
  simp only [Set.mem_sdiff, Set.mem_Ico, Set.mem_union, lt_inf_iff, sup_le_iff]
  constructor
  · rintro ⟨⟨ha, hb⟩, hcd⟩
    rcases lt_or_ge x c with hc | hc
    · exact Or.inl ⟨ha, hb, hc⟩
    · rcases lt_or_ge x d with hd | hd
      · exact absurd ⟨hc, hd⟩ hcd
      · exact Or.inr ⟨⟨ha, hd⟩, hb⟩
  · rintro (⟨ha, hb, hc⟩ | ⟨⟨ha, hd⟩, hb⟩)
```

```
    · exact ⟨⟨ha, hb⟩, fun ⟨hc', _⟩ => absurd hc' (not_le.mpr hc)⟩
    · exact ⟨⟨ha, hb⟩, fun ⟨_, hd'⟩ => absurd hd' (not_lt.mpr hd)⟩

def diffOneList (p q : ? × ?) : List (? × ?) := [(p.1, p.2 ⊓ q.1), (p.1 ⊔ q.2, p.2)]

def diffSingleList (L : List (? × ?)) (q : ? × ?) : List (? × ?) :=
  L.flatMap (fun p => diffOneList p q)

def diffAllList (p : ? × ?) (L2 : List (? × ?)) : List (? × ?) := L2.foldl
    diffSingleList [p]

def diffLists (L1 L2 : List (? × ?)) : List (? × ?) := L1.flatMap (fun p =>
    diffAllList p L2)

namespace presentedIntervals

@[simp] theorem mem {L : List (? × ?)} {x : ?} :
    x ∈ presentedIntervals L ↔ ∃ p ∈ L, p.1 ≤ x ∧ x < p.2 := by
  simp only [presentedIntervals, Set.mem_iUnion, Set.mem_Ico, exists_prop]

@[simp] theorem nil : presentedIntervals ([] : List (? × ?)) = ∅ := by
  ext x; simp

theorem cons (p : ? × ?) (L : List (? × ?)) :
    presentedIntervals (p :: L) = Set.Ico p.1 p.2 ∪ presentedIntervals L := by
  ext x; simp [Set.mem_Ico, or_and_right, exists_or]

theorem append (L1 L2 : List (? × ?)) :
    presentedIntervals (L1 ++ L2) = presentedIntervals L1 ∪ presentedIntervals L2 :=
    by
  induction L1 with
  | nil => simp
  | cons p L1 ih => simp [List.cons_append, cons, ih, Set.union_assoc]

theorem congr {L1 L2 : List (? × ?)} (h : ∀ p, p ∈ L1 ↔ p ∈ L2) :
    presentedIntervals L1 = presentedIntervals L2 := by
  ext x
  simp only [mem]
  constructor
  · rintro ⟨p, hp, h1, h2⟩; exact ⟨p, (h p).mp hp, h1, h2⟩
  · rintro ⟨p, hp, h1, h2⟩; exact ⟨p, (h p).mpr hp, h1, h2⟩

theorem inter (L1 L2 : List (? × ?)) :
    presentedIntervals L1 ∩ presentedIntervals L2 = presentedIntervals (
    combineIntervals L1 L2) := by
  ext x
  simp only [mem, combineIntervals, List.mem_flatMap, List.mem_map,
    Set.mem_inter_iff]
  constructor
  · rintro ⟨⟨p, hp, hxp1, hxp2⟩, ⟨q, hq, hxq1, hxq2⟩⟩
    exact ⟨(p.1 ⊔ q.1, p.2 ⊓ q.2), ⟨p, hp, q, hq, rfl⟩, sup_le hxp1 hxq1, lt_inf_iff.
    mpr ⟨hxp2, hxq2⟩⟩
  · rintro ⟨r, ⟨p, hp, q, hq, rfl⟩, hx1, hx2⟩
    exact ⟨⟨p, hp, le_sup_left.trans hx1, hx2.trans_le inf_le_left⟩,
      ⟨q, hq, le_sup_right.trans hx1, hx2.trans_le inf_le_right⟩⟩
```

```
theorem diffOneList (p q : ? × ?) :
    presentedIntervals (_root_.DomainTheory.NeighbourhoodSystems.diffOneList p q) =
      Set.Ico p.1 p.2 \ Set.Ico q.1 q.2 := by
  unfold _root_.DomainTheory.NeighbourhoodSystems.diffOneList
  rw [cons, cons, nil, Set.union_empty]
  exact (Ico_diff_Ico p.1 p.2 q.1 q.2).symm

theorem diffSingleList (L : List (? × ?)) (q : ? × ?) :
    presentedIntervals (_root_.DomainTheory.NeighbourhoodSystems.diffSingleList L q) =
      presentedIntervals L \ Set.Ico q.1 q.2 := by
  induction L with
  | nil => simp [_root_.DomainTheory.NeighbourhoodSystems.diffSingleList]
  | cons a l ih =>
    rw [show _root_.DomainTheory.NeighbourhoodSystems.diffSingleList (a :: l) q =
        _root_.DomainTheory.NeighbourhoodSystems.diffOneList a q ++
          _root_.DomainTheory.NeighbourhoodSystems.diffSingleList l q from rfl,
      append, presentedIntervals.diffOneList, ih, cons, Set.union_sdiff_distrib]

theorem foldl_diffSingleList (L2 : List (? × ?)) :
    ∀ acc : List (? × ?),
      presentedIntervals (L2.foldl _root_.DomainTheory.NeighbourhoodSystems.
    diffSingleList acc) =
        presentedIntervals acc \ presentedIntervals L2 := by
  induction L2 with
  | nil => intro acc; simp
  | cons a l ih =>
    intro acc
    rw [List.foldl_cons,
      ih (_root_.DomainTheory.NeighbourhoodSystems.diffSingleList acc a),
      presentedIntervals.diffSingleList, cons, Set.sdiff_sdiff]

theorem diffAllList (p : ? × ?) (L2 : List (? × ?)) :
    presentedIntervals (_root_.DomainTheory.NeighbourhoodSystems.diffAllList p L2) =
      Set.Ico p.1 p.2 \ presentedIntervals L2 := by
  unfold _root_.DomainTheory.NeighbourhoodSystems.diffAllList
  rw [foldl_diffSingleList, cons, nil, Set.union_empty]

theorem diffLists (L1 L2 : List (? × ?)) :
    presentedIntervals (_root_.DomainTheory.NeighbourhoodSystems.diffLists L1 L2) =
      presentedIntervals L1 \ presentedIntervals L2 := by
  induction L1 with
  | nil => simp [_root_.DomainTheory.NeighbourhoodSystems.diffLists]
  | cons a l ih =>
    rw [show _root_.DomainTheory.NeighbourhoodSystems.diffLists (a :: l) L2 =
        _root_.DomainTheory.NeighbourhoodSystems.diffAllList a L2 ++
          _root_.DomainTheory.NeighbourhoodSystems.diffLists l L2 from rfl,
      append, presentedIntervals.diffAllList, ih, cons, Set.union_sdiff_distrib]
theorem map_clip (L : List (? × ?)) :
    presentedIntervals (L.map clip) = presentedIntervals L ∩ Set.Ico (0 : ?) 1 := by
  ext x
  simp only [mem, List.mem_map, Set.mem_inter_iff, Set.mem_Ico, clip]
  constructor
  · rintro ⟨p, ⟨q, hq, rfl⟩, hx1, hx2⟩
    exact ⟨⟨q, hq, le_sup_left.trans hx1, hx2.trans_le inf_le_left⟩,
      le_sup_right.trans hx1, hx2.trans_le inf_le_right⟩
  · rintro ⟨⟨q, hq, hxq1, hxq2⟩, hx0, hx1⟩
```

```
    exact ⟨(q.1 ⊔ 0, q.2 ⊓ 1), ⟨q, hq, rfl⟩, sup_le hxq1 hx0, lt_inf_iff.mpr ⟨hxq2, hx1⟩
    ⟩

theorem filter_lt (L : List (? × ?)) :
    presentedIntervals (L.filter (fun p => decide (p.1 < p.2))) = presentedIntervals L
     := by
  ext x
  simp only [mem, List.mem_filter, decide_eq_true_eq]
  constructor
  · rintro ⟨p, ⟨hp, -⟩, hx⟩
    exact ⟨p, hp, hx⟩
  · rintro ⟨p, hp, hx1, hx2⟩
    exact ⟨p, ⟨hp, lt_of_le_of_lt hx1 hx2⟩, hx1, hx2⟩
theorem map_clipLt (m : ?) (L : List (? × ?)) :
    presentedIntervals (L.map (clipLt m)) = presentedIntervals L ∩ Set.Iio m := by
  ext x
  simp only [mem, List.mem_map, Set.mem_inter_iff, Set.mem_Iio, clipLt]
  constructor
  · rintro ⟨p, ⟨q, hq, rfl⟩, hx1, hx2⟩
    exact ⟨⟨q, hq, hx1, hx2.trans_le inf_le_left⟩, hx2.trans_le inf_le_right⟩
  · rintro ⟨⟨q, hq, hxq1, hxq2⟩, hxm⟩
    exact ⟨(q.1, q.2 ⊓ m), ⟨q, hq, rfl⟩, hxq1, lt_inf_iff.mpr ⟨hxq2, hxm⟩⟩

theorem map_clipGe (m : ?) (L : List (? × ?)) :
    presentedIntervals (L.map (clipGe m)) = presentedIntervals L ∩ Set.Ici m := by
  ext x
  simp only [mem, List.mem_map, Set.mem_inter_iff, Set.mem_Ici, clipGe]
  constructor
  · rintro ⟨p, ⟨q, hq, rfl⟩, hx1, hx2⟩
    exact ⟨⟨q, hq, le_sup_left.trans hx1, hx2⟩, le_sup_right.trans hx1⟩
  · rintro ⟨⟨q, hq, hxq1, hxq2⟩, hxm⟩
    exact ⟨(q.1 ⊔ m, q.2), ⟨q, hq, rfl⟩, sup_le hxq1 hxm, hxq2⟩

end presentedIntervals

end DomainTheory.NeighbourhoodSystems
```

U.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    presentedIntervals
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_19
public import Mathlib.Data.Fintype.Defs

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

abbrev UMaster : Set ? := Set.Ico (0 : ?) 1

theorem UMaster_nonempty : UMaster.Nonempty := by
```

```
  exact ⟨0, by simp [UMaster]⟩

def UMem (X : Set ?) : Prop :=
  (∃ L : List (? × ?), X = presentedIntervals L) ∧ X.Nonempty ∧ X ⊆ Set.Ico (0 : ?) 1

namespace UMem

theorem sub_master {X : Set ?} (hX : UMem X) : X ⊆ UMaster := hX.2.2

theorem master_mem : UMem UMaster :=
  ⟨⟨[(0, 1)], by rw [presentedIntervals.cons, presentedIntervals.nil, Set.union_empty]⟩
    ,
    ⟨0, by norm_num⟩, subset_rfl⟩

theorem inter_mem {X Y Z : Set ?} (hX : UMem X) (hY : UMem Y) (hZ : UMem Z)
    (hZsub : Z ⊆ X ∩ Y) : UMem (X ∩ Y) := by
  rcases hX with ⟨⟨L1, rfl⟩, -, hXsub⟩
  rcases hY with ⟨⟨L2, rfl⟩, -, -⟩
  rcases hZ with ⟨-, hZne, -⟩
  exact ⟨⟨combineIntervals L1 L2, presentedIntervals.inter L1 L2⟩,
    hZne.mono hZsub, Set.inter_subset_left.trans hXsub⟩
end UMem

def U : NeighborhoodSystem ? where
  mem := UMem
  master := UMaster
  master_nonempty := UMaster_nonempty
  master_mem := UMem.master_mem
  inter_mem := UMem.inter_mem
  sub_master := UMem.sub_master

namespace U

theorem mem_iff_scott {X : Set ?} :
    U.mem X ↔ ∃ L : List (? × ?), (∀ p ∈ L, (0 : ?) ≤ p.1 ∧ p.1 < p.2 ∧ p.2 ≤ 1) ∧
      X = presentedIntervals L ∧ X.Nonempty := by
  constructor
  · rintro ⟨⟨L, rfl⟩, hne, hsub⟩
    refine ⟨(L.map clip).filter (fun p => decide (p.1 < p.2)), ?_, ?_, ?_⟩
    · rintro p hp
      obtain ⟨hp1, hp2⟩ := List.mem_filter.mp hp
      obtain ⟨q, hq, rfl⟩ := List.mem_map.mp hp1
      exact ⟨le_sup_right, decide_eq_true_eq.mp hp2, inf_le_right⟩
    · rw [presentedIntervals.filter_lt, presentedIntervals.map_clip,
        Set.inter_eq_left.mpr hsub]
    · exact hne
  · rintro ⟨L, hbound, rfl, hne⟩
    refine ⟨⟨L, rfl⟩, hne, ?_⟩
    rintro x hx
    obtain ⟨p, hp, hx1, hx2⟩ := presentedIntervals.mem.mp hx
    obtain ⟨hp0, -, hp1⟩ := hbound p hp
    exact ⟨hp0.trans hx1, hx2.trans_le hp1⟩

theorem no_minimal {X : Set ?} (hX : U.mem X) :
    ∃ Y Z : Set ?, U.mem Y ∧ U.mem Z ∧ Y ∩ Z = ∅ ∧ Y ∪ Z = X ∧ Y = X ∧ Z = X := by
  obtain ⟨⟨L, rfl⟩, hne, hsub⟩ := hX
```

```
  obtain ⟨x, hx⟩ := hne
  obtain ⟨p, hp, hx1, hx2⟩ := presentedIntervals.mem.mp hx
  have hlt : p.1 < p.2 := lt_of_le_of_lt hx1 hx2
  set m := (p.1 + p.2) / 2 with hm
  have hpm1 : p.1 < m := left_lt_add_div_two.mpr hlt
  have hpm2 : m < p.2 := add_div_two_lt_right.mpr hlt
  have hYZinter : (presentedIntervals L ∩ Set.Iio m) ∩ (presentedIntervals L ∩ Set.Ici
     m) =
       (∅ : Set ?) := by
     ext y
     simp only [Set.mem_inter_iff, Set.mem_Iio, Set.mem_Ici, Set.mem_empty_iff_false,
     iff_false]
     rintro ⟨⟨-, h1⟩, -, h2⟩
     exact absurd h1 (not_lt.mpr h2)
  have hYZunion : (presentedIntervals L ∩ Set.Iio m) ∪ (presentedIntervals L ∩ Set.Ici
     m) =
       presentedIntervals L := by
     ext y
     simp only [Set.mem_union, Set.mem_inter_iff, Set.mem_Iio, Set.mem_Ici]
     constructor
     · rintro (⟨h, -⟩ | ⟨h, -⟩) <;> exact h
     · intro h
       rcases lt_or_ge y m with hlt' | hge'
       · exact Or.inl ⟨h, hlt'⟩
       · exact Or.inr ⟨h, hge'⟩
  have hYne : (presentedIntervals L ∩ Set.Iio m).Nonempty :=
    ⟨p.1, presentedIntervals.mem.mpr ⟨p, hp, le_refl _, hlt⟩, hpm1⟩
  have hZne : (presentedIntervals L ∩ Set.Ici m).Nonempty :=
    ⟨m, presentedIntervals.mem.mpr ⟨p, hp, hpm1.le, hpm2⟩, le_refl m⟩
  refine ⟨_, _, ⟨⟨_, (presentedIntervals.map_clipLt m L).symm⟩, hYne,
      Set.inter_subset_left.trans hsub⟩,
    ⟨⟨_, (presentedIntervals.map_clipGe m L).symm⟩, hZne, Set.inter_subset_left.trans
    hsub⟩,
    hYZinter, hYZunion, ?_, ?_⟩
  · intro hEq
    have hZsub : presentedIntervals L ∩ Set.Ici m ⊆ presentedIntervals L ∩ Set.Iio m
    := by
      rw [hEq]; exact Set.inter_subset_left
    exact hZne.ne_empty ((Set.inter_eq_right.mpr hZsub).symm.trans hYZinter)
  · intro hEq
    have hYsub : presentedIntervals L ∩ Set.Iio m ⊆ presentedIntervals L ∩ Set.Ici m
    := by
      rw [hEq]; exact Set.inter_subset_left
    exact hYne.ne_empty ((Set.inter_eq_left.mpr hYsub).symm.trans hYZinter)

theorem union_mem {X Y : Set ?} (hX : X = ∅ ∨ U.mem X) (hY : Y = ∅ ∨ U.mem Y) :
    X ∪ Y = ∅ ∨ U.mem (X ∪ Y) := by
  rcases hX with rfl | hX
  · rcases hY with rfl | hY
    · exact Or.inl (by simp)
    · exact Or.inr (by simpa using hY)
  · rcases hY with rfl | hY
    · exact Or.inr (by simpa using hX)
    · obtain ⟨⟨L1, rfl⟩, hXne, hXsub⟩ := hX
      obtain ⟨⟨L2, rfl⟩, hYne, hYsub⟩ := hY
      refine Or.inr ⟨⟨L1 ++ L2, (presentedIntervals.append L1 L2).symm⟩,
```

```
        hXne.mono Set.subset_union_left, Set.union_subset hXsub hYsub⟩

theorem iUnion_mem {ι : Type*} [Fintype ι] {f : ι → Set ?} (hf : ∀ i, f i = ∅ ∨ U.mem (
    f i))
    (hne : (⋃ i, f i).Nonempty) : U.mem (⋃ i, f i) := by
  classical
  have hstep : ∀ s : Finset ι, (⋃ i ∈ s, f i) = ∅ ∨ U.mem (⋃ i ∈ s, f i) := by
    intro s
    induction s using Finset.induction_on with
    | empty => exact Or.inl (by simp)
    | insert i s hi ih =>
      rw [Finset.set_biUnion_insert]
      exact union_mem (hf i) ih
  have hall : (⋃ i, f i) = ⋃ i ∈ (Finset.univ : Finset ι), f i := by simp
  rw [hall] at hne ⊢
  exact (hstep Finset.univ).resolve_left hne.ne_empty

theorem diff_mem {X Y : Set ?} (hX : U.mem X) (hY : U.mem Y) : X \ Y = ∅ ∨ U.mem (X \
    Y) := by
  obtain ⟨⟨L1, rfl⟩, -, hXsub⟩ := hX
  obtain ⟨⟨L2, rfl⟩, -, -⟩ := hY
  rcases Set.eq_empty_or_nonempty (presentedIntervals L1 \ presentedIntervals L2) with
     h | h
  · exact Or.inl h
  · exact Or.inr ⟨⟨diffLists L1 L2, (presentedIntervals.diffLists L1 L2).symm⟩, h,
      Set.sdiff_subset.trans hXsub⟩

theorem diffClosed : U.DiffClosed := fun hX hY => diff_mem hX hY

theorem isPositive : U.IsPositive := by
  rintro X Y ⟨⟨L1, rfl⟩, -, hXsub⟩ ⟨⟨L2, rfl⟩, -, -⟩
  refine ⟨fun h => h.2.1, fun hne => ⟨⟨combineIntervals L1 L2, presentedIntervals.inter
     L1 L2⟩,
    hne, Set.inter_subset_left.trans hXsub⟩⟩
theorem noMinimal : U.NoMinimal := by
  intro X hX
  obtain ⟨Y, Z, hY, hZ, hYZinter, hYZunion, -, -⟩ := no_minimal hX
  exact ⟨Y, Z, hY, hZ, hY.2.1, hZ.2.1, hYZinter, hYZunion⟩

end U

end DomainTheory.NeighbourhoodSystems
```

SplitSpec.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.U
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.subApprox

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

section
```

```
open NeighborhoodSystem
variable {α : Type*}

def SplitSpec (split : Set α → Set ? → Set α → Set ? × Set ?) : Prop :=
  ∀ {A : Set α} {B : Set ?}, (A = ∅ ↔ B = ∅) → (B = ∅ ∨ U.mem B) → ∀ Xn : Set α,
    ((split A B Xn).1 = ∅ ∨ U.mem (split A B Xn).1) ∧
      ((split A B Xn).2 = ∅ ∨ U.mem (split A B Xn).2) ∧
      (A ∩ Xn = ∅ ↔ (split A B Xn).1 = ∅) ∧
      (A \ Xn = ∅ ↔ (split A B Xn).2 = ∅) ∧
      (split A B Xn).1 ∪ (split A B Xn).2 = B ∧
      (split A B Xn).1 ∩ (split A B Xn).2 = ∅

theorem exists_split {A : Set α} {B : Set ?} (hAB : A = ∅ ↔ B = ∅)
    (hBU : B = ∅ ∨ U.mem B) (Xn : Set α) :
    ∃ I J : Set ?, (I = ∅ ∨ U.mem I) ∧ (J = ∅ ∨ U.mem J) ∧
      (A ∩ Xn = ∅ ↔ I = ∅) ∧ (A \ Xn = ∅ ↔ J = ∅) ∧ I ∪ J = B ∧ I ∩ J = ∅ := by
  by_cases h1 : A ∩ Xn = ∅
  · refine ⟨∅, B, Or.inl rfl, hBU, by simp [h1], ?_, by simp, by simp⟩
    have hAeq : A \ Xn = A := by
      ext x
      simp only [Set.mem_sdiff]
      refine ⟨fun hx => hx.1, fun hx => ⟨hx, fun hxn => ?_⟩⟩
      exact Set.eq_empty_iff_forall_notMem.mp h1 x ⟨hx, hxn⟩
    rw [hAeq, hAB]
  · by_cases h2 : A \ Xn = ∅
    · refine ⟨B, ∅, hBU, Or.inl rfl, ?_, iff_of_true h2 rfl, by simp, by simp⟩
      have hAeq : A ∩ Xn = A := by
        ext x
        simp only [Set.mem_inter_iff]
        refine ⟨fun hx => hx.1, fun hx => ⟨hx, ?_⟩⟩
        by_contra hxn
        exact Set.eq_empty_iff_forall_notMem.mp h2 x ⟨hx, hxn⟩
      rw [hAeq, hAB]
    · have hAne : A = ∅ := by
        intro hA
        apply h1
        rw [hA]
        exact Set.empty_inter Xn
      have hBne : B = ∅ := fun hB => hAne (hAB.mpr hB)
      have hBU' : U.mem B := hBU.resolve_left hBne
      obtain ⟨Y, Z, hY, hZ, hYZinter, hYZunion, -, -⟩ := U.no_minimal hBU'
      have hYne : Y = ∅ := hY.2.1.ne_empty
      have hZne : Z = ∅ := hZ.2.1.ne_empty
      exact ⟨Y, Z, Or.inr hY, Or.inr hZ, iff_of_false h1 hYne, iff_of_false h2 hZne,
        hYZunion, hYZinter⟩

def genAtom {β : Type*} (Z : ℕ → Set β) (M : Set β) (? : ℕ → Bool) : ℕ → Set β
  | 0 => M
  | (n + 1) => genAtom Z M ? n ∩ (if ? n then Z n else M \ Z n)

end

end DomainTheory.NeighbourhoodSystems
```

atomU.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.SplitSpec

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

section
open NeighborhoodSystem
variable {α : Type*}
variable (split : Set α → Set ? → Set α → Set ? × Set ?)

noncomputable def atomU (split : Set α → Set ? → Set α → Set ? × Set ?)
    (X : ℕ → Set α) (Δ : Set α) (? : ℕ → Bool) : ℕ → Set ?
  | 0 => U.master
  | (n + 1) =>
      if ? n then (split (genAtom X Δ ? n) (atomU split X Δ ? n) (X n)).1
      else (split (genAtom X Δ ? n) (atomU split X Δ ? n) (X n)).2
end

section
open NeighborhoodSystem
variable {α : Type*}
variable (split : Set α → Set ? → Set α → Set ? × Set ?)
variable (X : ℕ → Set α) (Δ : Set α)

@[simp] theorem atomU_zero (? : ℕ → Bool) : atomU split X Δ ? 0 = U.master := rfl
end

section
open NeighborhoodSystem
variable {α : Type*}
variable (split : Set α → Set ? → Set α → Set ? × Set ?)
variable (X : ℕ → Set α) (Δ : Set α)
variable (hΔ : Δ.Nonempty) (hsplit : SplitSpec split)
include hΔ hsplit

def extendTrue {n : ℕ} (?' : Fin n → Bool) : ℕ → Bool :=
  fun i => if h : i < n then ?' ⟨i, h⟩ else true

noncomputable def Yseq (n : ℕ) : Set ? :=
  ⋃ ?' : Fin n → Bool, atomU split X Δ (extendTrue ?') (n + 1)

def restrictFin (? : ℕ → Bool) (n : ℕ) : Fin n → Bool := fun i => ? i.val

end

section
open NeighborhoodSystem
variable {α : Type*}

open Classical in

noncomputable def splitChoice (A : Set α) (B : Set ?) (Xn : Set α) : Set ? × Set ? :=
  if h : (A = ∅ ↔ B = ∅) ∧ (B = ∅ ∨ U.mem B) then
```

```
    ⟨(exists_split h.1 h.2 Xn).choose, (exists_split h.1 h.2 Xn).choose_spec.choose⟩
  else (∅, ∅)

theorem genAtom_subset {β : Type*} (Z : ℕ → Set β) (M : Set β) (? : ℕ → Bool) (n : ℕ
    ) :
    genAtom Z M ? n ⊆ M := by
  induction n with
  | zero => exact subset_rfl
  | succ n ih => exact (Set.inter_subset_left).trans ih

theorem genAtom_congr {β : Type*} (Z : ℕ → Set β) (M : Set β) {? ?' : ℕ → Bool} {n :
    ℕ}
    (h : ∀ i < n, ? i = ?' i) : genAtom Z M ? n = genAtom Z M ?' n := by
  induction n with
  | zero => rfl
  | succ n ih =>
    have hn := h n (Nat.lt_succ_self n)
    have hprev : genAtom Z M ? n = genAtom Z M ?' n := ih (fun i hi => h i (Nat.
    lt_succ_of_lt hi))
    show genAtom Z M ? n ∩ _ = genAtom Z M ?' n ∩ _
    rw [hprev, hn]

theorem genAtom_forward {β : Type*} {Z : ℕ → Set β} {M : Set β} {? : ℕ → Bool} {n :
    ℕ}
    {x : β} (hx : x ∈ genAtom Z M ? n) : ∀ i < n, (? i = true ↔ x ∈ Z i) := by
  induction n with
  | zero => intro i hi; exact absurd hi (Nat.not_lt_zero i)
  | succ n ih =>
    intro i hi
    obtain ⟨hxprev, hxlast⟩ := hx
    rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
    · exact ih hxprev i hi'
    · by_cases h? : ? i = true
      · simp only [h?, ite_true] at hxlast
        exact ⟨fun _ => hxlast, fun _ => h?⟩
      · rw [Bool.not_eq_true] at h?
        simp only [h?] at hxlast
        exact ⟨fun h => absurd h (by simp [h?]), fun hmem => absurd hmem hxlast.2⟩

open Classical in

theorem genAtom_self {β : Type*} (Z : ℕ → Set β) (M : Set β) {x : β} (hx : x ∈ M) :
    ∀ n, x ∈ genAtom Z M (fun k => decide (x ∈ Z k)) n := by
  intro n
  induction n with
  | zero => exact hx
  | succ n ih =>
    refine ⟨ih, ?_⟩
    by_cases h : x ∈ Z n
    · simp [h]
    · simp [h, hx]

theorem split_fst_subset {split : Set α → Set ? → Set α → Set ? × Set ?} (hsplit :
    SplitSpec split)
    {A : Set α} {B : Set ?} (hAB : A = ∅ ↔ B = ∅)
    (hBU : B = ∅ ∨ U.mem B) (Xn : Set α) : (split A B Xn).1 ⊆ B :=
```

```
  Set.subset_union_left.trans_eq (hsplit hAB hBU Xn).2.2.2.2.1

theorem split_snd_subset {split : Set α → Set ? → Set α → Set ? × Set ?} (hsplit :
    SplitSpec split)
    {A : Set α} {B : Set ?} (hAB : A = ∅ ↔ B = ∅)
    (hBU : B = ∅ ∨ U.mem B) (Xn : Set α) : (split A B Xn).2 ⊆ B :=
  Set.subset_union_right.trans_eq (hsplit hAB hBU Xn).2.2.2.2.1

variable (split : Set α → Set ? → Set α → Set ? × Set ?)

variable (X : ℕ → Set α) (Δ : Set α)

theorem atomU_succ (? : ℕ → Bool) (n : ℕ) :
    atomU split X Δ ? (n + 1) =
      if ? n then (split (genAtom X Δ ? n) (atomU split X Δ ? n) (X n)).1
      else (split (genAtom X Δ ? n) (atomU split X Δ ? n) (X n)).2 := rfl

theorem atomU_congr {? ?' : ℕ → Bool} {n : ℕ} (h : ∀ i < n, ? i = ?' i) :
    atomU split X Δ ? n = atomU split X Δ ?' n := by
  induction n with
  | zero => rfl
  | succ n ih =>
    have hprev : atomU split X Δ ? n = atomU split X Δ ?' n :=
      ih (fun i hi => h i (Nat.lt_succ_of_lt hi))
    have hA : genAtom X Δ ? n = genAtom X Δ ?' n :=
      genAtom_congr X Δ (fun i hi => h i (Nat.lt_succ_of_lt hi))
    have hn := h n (Nat.lt_succ_self n)
    rw [atomU_succ, atomU_succ, hA, hprev, hn]

variable (hΔ : Δ.Nonempty) (hsplit : SplitSpec split)
include hΔ hsplit

theorem atomU_invariant :
    ∀ n, (∀ ?, genAtom X Δ ? n = ∅ ↔ atomU split X Δ ? n = ∅) ∧
      (∀ ?, atomU split X Δ ? n = ∅ ∨ U.mem (atomU split X Δ ? n)) ∧
      (∀ ? ?', (∃ i < n, ? i = ?' i) →
        atomU split X Δ ? n ∩ atomU split X Δ ?' n = ∅) := by
  have hUmasterNe : (U.master : Set ?) = ∅ := Set.Nonempty.ne_empty ⟨0, by norm_num [U]
    ⟩
  intro n
  induction n with
  | zero =>
    refine ⟨fun ? => ?_, fun ? => Or.inr U.master_mem, fun ? ?' ⟨i, hi, _⟩ => absurd hi
     (Nat.not_lt_zero i)⟩
    show Δ = ∅ ↔ (U.master : Set ?) = ∅
    exact ⟨fun h => absurd h hΔ.ne_empty, fun h => absurd h hUmasterNe⟩
  | succ n ih =>
    obtain ⟨ihmatch, ihmem, ihdisj⟩ := ih
    refine ⟨fun ? => ?_, fun ? => ?_, fun ? ?' ⟨i, hi, hne⟩ => ?_⟩
    · have hspec := hsplit (ihmatch ?) (ihmem ?) (X n)
      rw [atomU_succ]
      by_cases h? : ? n = true
      · rw [show genAtom X Δ ? (n + 1) = genAtom X Δ ? n ∩ X n from by simp [genAtom,
    h?]]
        simp only [h?, ite_true]
        exact hspec.2.2.1
```

```
      · rw [Bool.not_eq_true] at h?
        have hsub := genAtom_subset X Δ ? n
        rw [show genAtom X Δ ? (n + 1) = genAtom X Δ ? n \ X n from by
          have heq : genAtom X Δ ? (n + 1) = genAtom X Δ ? n ∩ (Δ \ X n) := by simp [
    genAtom, h?]
          rw [heq]
          ext x; constructor
          · rintro ⟨hx1, -, hx2⟩; exact ⟨hx1, hx2⟩
          · rintro ⟨hx1, hx2⟩; exact ⟨hx1, hsub hx1, hx2⟩]
        simp only [h?]
        exact hspec.2.2.2.1
    · have hspec := hsplit (ihmatch ?) (ihmem ?) (X n)
      rw [atomU_succ]
      by_cases h? : ? n = true
      · simp only [h?, ite_true]; exact hspec.1
      · simp only [h?]; exact hspec.2.1
    · by_cases hagree : ∀ j < n, ? j = ?' j
      · have h?n : ? n = ?' n := by
          intro heq
          exact hne (by
            rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
            · exact hagree i hi'
            · exact heq)
        have hA : genAtom X Δ ? n = genAtom X Δ ?' n := genAtom_congr X Δ hagree
        have hB : atomU split X Δ ? n = atomU split X Δ ?' n := atomU_congr split X Δ
     hagree
        have hspec := hsplit (ihmatch ?) (ihmem ?) (X n)
        rw [atomU_succ, atomU_succ, hA, hB]
        have hIJ := hspec.2.2.2.2.2
        rcases Bool.eq_false_or_eq_true (? n) with h1 | h1 <;>
          rcases Bool.eq_false_or_eq_true (?' n) with h2 | h2 <;>
          simp_all [Set.inter_comm]
      · push Not at hagree
        obtain ⟨j, hj, hjne⟩ := hagree
        have hd : atomU split X Δ ? n ∩ atomU split X Δ ?' n = ∅ := ihdisj ? ?' ⟨j, hj
    , hjne⟩
        have h1 : atomU split X Δ ? (n + 1) ⊆ atomU split X Δ ? n := by
          rw [atomU_succ]
          by_cases h? : ? n = true
          · simp only [h?, ite_true]; exact split_fst_subset hsplit (ihmatch ?) (ihmem
    ?) (X n)
          · simp only [h?]; exact split_snd_subset hsplit (ihmatch ?) (ihmem ?) (X n)
        have h2 : atomU split X Δ ?' (n + 1) ⊆ atomU split X Δ ?' n := by
          rw [atomU_succ]
          by_cases h?' : ?' n = true
          · simp only [h?', ite_true]; exact split_fst_subset hsplit (ihmatch ?') (
    ihmem ?') (X n)
          · simp only [h?']; exact split_snd_subset hsplit (ihmatch ?') (ihmem ?') (X n
    )
        exact Set.subset_eq_empty (Set.inter_subset_inter h1 h2) hd

theorem atomU_succ_subset (? : ℕ → Bool) (n : ℕ) :
    atomU split X Δ ? (n + 1) ⊆ atomU split X Δ ? n := by
  obtain ⟨hmatch, hmem, -⟩ := atomU_invariant split X Δ hΔ hsplit n
  rw [atomU_succ]
  by_cases h? : ? n = true
```

```
  · simp only [h?, ite_true]; exact split_fst_subset hsplit (hmatch ?) (hmem ?) (X n)
  · simp only [h?]; exact split_snd_subset hsplit (hmatch ?) (hmem ?) (X n)

omit hΔ hsplit in
theorem extendTrue_agree {n : ℕ} (?' : Fin n → Bool) (i : ℕ) (hi : i < n) :
    extendTrue ?' i = ?' ⟨i, hi⟩ := by simp [extendTrue, hi]

omit hΔ hsplit in
theorem extendTrue_restrictFin_agree (? : ℕ → Bool) (n i : ℕ) (hi : i < n) :
    extendTrue (restrictFin ? n) i = ? i := by simp [extendTrue, restrictFin, hi]

omit hΔ hsplit in
theorem subset_Yseq {n : ℕ} (?' : Fin n → Bool) :
    atomU split X Δ (extendTrue ?') (n + 1) ⊆ Yseq split X Δ n :=
  Set.subset_iUnion (fun ?' => atomU split X Δ (extendTrue ?') (n + 1)) ?'

theorem split_fst_eq_inter_Yseq (? : ℕ → Bool) (n : ℕ) :
    (split (genAtom X Δ ? n) (atomU split X Δ ? n) (X n)).1 =
      atomU split X Δ ? n ∩ Yseq split X Δ n := by
  obtain ⟨hmatch, hmem, hdisj⟩ := atomU_invariant split X Δ hΔ hsplit n
  set A := genAtom X Δ ? n with hAdef
  set B := atomU split X Δ ? n with hBdef
  set I := (split A B (X n)).1 with hIdef
  set ?2 := Function.update ? n true with h?2def
  set ?3 := extendTrue (restrictFin ?2 n) with h?3def
  have hagreefull : ∀ i < n + 1, ?3 i = ?2 i := by
    intro i hi
    rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
    · exact extendTrue_restrictFin_agree ?2 n i hi'
    · simp [h?3def, extendTrue, h?2def]
  have hI_eq : atomU split X Δ ?2 (n + 1) = I := by
    rw [atomU_succ]
    have hd2n : ?2 n = true := by simp [h?2def]
    have hA2 : genAtom X Δ ?2 n = A := by
      apply genAtom_congr; intro i hi; simp [h?2def, Function.update_of_ne (ne_of_lt
    hi)]
    have hB2 : atomU split X Δ ?2 n = B := by
      apply atomU_congr; intro i hi; simp [h?2def, Function.update_of_ne (ne_of_lt hi)
    ]
    rw [hd2n, ite_eq_left rfl, hA2, hB2]
  have h?3_eq : atomU split X Δ ?3 (n + 1) = I := (atomU_congr split X Δ hagreefull).
    trans hI_eq
  apply Set.Subset.antisymm
  · have hIsubB : I ⊆ B := split_fst_subset hsplit (hmatch ?) (hmem ?) (X n)
    have hIsubY : I ⊆ Yseq split X Δ n := h?3_eq ▸ subset_Yseq split X Δ (restrictFin
     ?2 n)
    exact Set.subset_inter hIsubB hIsubY
  · rintro z ⟨hzB, hzY⟩
    obtain ⟨?', hz'⟩ := Set.mem_iUnion.mp hzY
    by_cases hagree : ∀ i < n, extendTrue ?' i = ? i
    · have hAeq : genAtom X Δ (extendTrue ?') n = A := genAtom_congr X Δ hagree
      have hBeq : atomU split X Δ (extendTrue ?') n = B := atomU_congr split X Δ
    hagree
      have hlast : extendTrue ?' n = true := by simp [extendTrue]
      have heq : atomU split X Δ (extendTrue ?') (n + 1) = I := by
        rw [atomU_succ, hAeq, hBeq, hlast, ite_eq_left rfl]
```

```
      rwa [heq] at hz'
    · push Not at hagree
      obtain ⟨j, hj, hjne⟩ := hagree
      have hzB' : z ∈ atomU split X Δ (extendTrue ?') n :=
        atomU_succ_subset split X Δ hΔ hsplit (extendTrue ?') n hz'
      have hempty := hdisj ? (extendTrue ?') ⟨j, hj, fun h => hjne (h.symm)⟩
      exact absurd (Set.mem_inter hzB hzB') (by rw [hempty]; simp)

theorem atomU_subset_master (? : ℕ → Bool) (n : ℕ) : atomU split X Δ ? n ⊆ U.master
    := by
  induction n with
  | zero => exact subset_rfl
  | succ n ih => exact (atomU_succ_subset split X Δ hΔ hsplit ? n).trans ih

theorem atomU_succ_eq (? : ℕ → Bool) (n : ℕ) :
    atomU split X Δ ? (n + 1) =
      atomU split X Δ ? n ∩ (if ? n then Yseq split X Δ n else U.master \ Yseq split
    X Δ n) := by
  obtain ⟨hmatch, hmem, -⟩ := atomU_invariant split X Δ hΔ hsplit n
  have hspec := hsplit (hmatch ?) (hmem ?) (X n)
  have hIeq := split_fst_eq_inter_Yseq split X Δ hΔ hsplit ? n
  by_cases h? : ? n = true
  · rw [atomU_succ, ite_eq_left h?, ite_eq_left h?]; exact hIeq
  · rw [atomU_succ, ite_eq_right h?, ite_eq_right h?]
    have hJeq : (split (genAtom X Δ ? n) (atomU split X Δ ? n) (X n)).2 =
        atomU split X Δ ? n \ Yseq split X Δ n := by
      have hunion := hspec.2.2.2.2.1
      have hinter := hspec.2.2.2.2.2
      ext x
      constructor
      · intro hxJ
        have hxB : x ∈ atomU split X Δ ? n := hunion ▸ Or.inr hxJ
        refine ⟨hxB, fun hxY => ?_⟩
        have hxI : x ∈ (split (genAtom X Δ ? n) (atomU split X Δ ? n) (X n)).1 :=
          hIeq ▸ Set.mem_inter hxB hxY
        exact absurd (Set.mem_inter hxI hxJ) (by rw [hinter]; simp)
      · rintro ⟨hxB, hxnY⟩
        rw [← hunion] at hxB
        rcases hxB with hxI | hxJ
        · exact absurd (hIeq ▸ hxI : x ∈ atomU split X Δ ? n ∩ Yseq split X Δ n).2
    hxnY
        · exact hxJ
    rw [hJeq]
    have hsub := atomU_subset_master split X Δ hΔ hsplit ? n
    ext x
    constructor
    · rintro ⟨hx1, hx2⟩; exact ⟨hx1, hsub hx1, hx2⟩
    · rintro ⟨hx1, -, hx2⟩; exact ⟨hx1, hx2⟩

theorem atomU_eq_genAtom (? : ℕ → Bool) :
    ∀ n, atomU split X Δ ? n = genAtom (Yseq split X Δ) U.master ? n
  | 0 => rfl
  | (n + 1) => by
      rw [atomU_succ_eq split X Δ hΔ hsplit, atomU_eq_genAtom ? n]; rfl

end
```

```
end DomainTheory.NeighbourhoodSystems
```

Yseq.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomU

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

section
open NeighborhoodSystem
variable {α : Type*}
variable (split : Set α → Set ? → Set α → Set ? × Set ?)
variable (X : ℕ → Set α) (Δ : Set α)
variable (hΔ : Δ.Nonempty) (hsplit : SplitSpec split)
include hΔ hsplit

omit hΔ hsplit in
theorem transfer_dir {β1 β2 : Type*} (Z1 : ℕ → Set β1) (M1 : Set β1) (Z2 : ℕ → Set β
    2)
    (M2 : Set β2) (hcore : ∀ ? n, genAtom Z1 M1 ? n = ∅ ↔ genAtom Z2 M2 ? n = ∅)
    {cs : List (ℕ × Bool)} {n : ℕ} (hn : ∀ p ∈ cs, p.1 < n)
    (hne : {x ∈ M1 | ∀ p ∈ cs, (p.2 = true ↔ x ∈ Z1 p.1)}.Nonempty) :
    {y ∈ M2 | ∀ p ∈ cs, (p.2 = true ↔ y ∈ Z2 p.1)}.Nonempty := by
  classical
  obtain ⟨x, hxM, hxcs⟩ := hne
  set ?0 : ℕ → Bool := fun k => decide (x ∈ Z1 k) with h?0def
  have hX1 : x ∈ genAtom Z1 M1 ?0 n := genAtom_self Z1 M1 hxM n
  have hne1 : (genAtom Z1 M1 ?0 n).Nonempty := ⟨x, hX1⟩
  have hne2 : (genAtom Z2 M2 ?0 n).Nonempty := by
    rw [Set.nonempty_iff_ne_empty]
    exact fun h2 => hne1.ne_empty ((hcore ?0 n).mpr h2)
  obtain ⟨y, hy⟩ := hne2
  refine ⟨y, genAtom_subset Z2 M2 ?0 n hy, fun p hp => ?_⟩
  have hforward := genAtom_forward hy p.1 (hn p hp)
  have hbeq : ?0 p.1 = p.2 := by
    show decide (x ∈ Z1 p.1) = p.2
    rw [Bool.eq_iff_iff, decide_eq_true_iff]
    exact (hxcs p hp).symm
  rwa [hbeq] at hforward

theorem transfer_empty_iff {cs : List (ℕ × Bool)} {n : ℕ} (hn : ∀ p ∈ cs, p.1 < n) :
    {x ∈ Δ | ∀ p ∈ cs, (p.2 = true ↔ x ∈ X p.1)}.Nonempty ↔
      {y ∈ U.master | ∀ p ∈ cs, (p.2 = true ↔ y ∈ Yseq split X Δ p.1)}.Nonempty := by
  have hcore : ∀ ? n, genAtom X Δ ? n = ∅ ↔ genAtom (Yseq split X Δ) U.master ? n = ∅
    :=
    fun ? n => (atomU_invariant split X Δ hΔ hsplit n).1 ?
      |>.trans (by rw [atomU_eq_genAtom split X Δ hΔ hsplit])
  have hcore' : ∀ ? n, genAtom (Yseq split X Δ) U.master ? n = ∅ ↔ genAtom X Δ ? n =
    ∅ :=
    fun ? n => (hcore ? n).symm
```

```
  exact ⟨transfer_dir X Δ (Yseq split X Δ) U.master hcore hn,
    transfer_dir (Yseq split X Δ) U.master X Δ hcore' hn⟩

theorem transfer_subset_iff (i j : ℕ) :
    Δ ∩ X i ⊆ X j ↔ U.master ∩ Yseq split X Δ i ⊆ Yseq split X Δ j := by
  have key := transfer_empty_iff split X Δ hΔ hsplit (cs := [(i, true), (j, false)])
    (n := max i j + 1)
    (by simp only [List.mem_cons, List.not_mem_nil, or_false]
        rintro p (rfl | rfl) <;> simp)
  have hLHS : {x ∈ Δ | ∀ p ∈ [(i, true), (j, false)], (p.2 = true ↔ x ∈ X p.1)}
      = (Δ ∩ X i) \ X j := by
    ext x
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_sdiff, Set.mem_inter_iff]
    tauto
  have hRHS : {y ∈ U.master |
      ∀ p ∈ [(i, true), (j, false)], (p.2 = true ↔ y ∈ Yseq split X Δ p.1)}
      = (U.master ∩ Yseq split X Δ i) \ Yseq split X Δ j := by
    ext y
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_sdiff, Set.mem_inter_iff]
    tauto
  rw [hLHS, hRHS] at key
  rw [← Set.sdiff_eq_empty, ← Set.sdiff_eq_empty, ← Set.not_nonempty_iff_eq_empty,
    ← Set.not_nonempty_iff_eq_empty, not_iff_not]
  exact key

theorem transfer_inter_empty_iff (i j : ℕ) :
    Δ ∩ X i ∩ X j = ∅ ↔ U.master ∩ Yseq split X Δ i ∩ Yseq split X Δ j = ∅ := by
  have key := transfer_empty_iff split X Δ hΔ hsplit (cs := [(i, true), (j, true)])
    (n := max i j + 1)
    (by simp only [List.mem_cons, List.not_mem_nil, or_false]
        rintro p (rfl | rfl) <;> simp)
  have hLHS : {x ∈ Δ | ∀ p ∈ [(i, true), (j, true)], (p.2 = true ↔ x ∈ X p.1)}
      = Δ ∩ X i ∩ X j := by
    ext x
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_inter_iff]
    tauto
  have hRHS : {y ∈ U.master | ∀ p ∈ [(i, true), (j, true)], (p.2 = true ↔ y ∈ Yseq
    split X Δ p.1)}
      = U.master ∩ Yseq split X Δ i ∩ Yseq split X Δ j := by
    ext y
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_inter_iff]
    tauto
  rw [hLHS, hRHS] at key
  rw [← Set.not_nonempty_iff_eq_empty, ← Set.not_nonempty_iff_eq_empty, not_iff_not]
  exact key

theorem transfer_double_subset_iff (i j k : ℕ) :
    Δ ∩ X i ∩ X j ⊆ X k ↔ U.master ∩ Yseq split X Δ i ∩ Yseq split X Δ j ⊆ Yseq
    split X Δ k := by
  have key := transfer_empty_iff split X Δ hΔ hsplit (cs := [(i, true), (j, true), (k,
     false)])
    (n := max i (max j k) + 1)
```

```
    (by simp only [List.mem_cons, List.not_mem_nil, or_false]
        rintro p (rfl | rfl | rfl) <;>
          simp [(Nat.le_max_left j k).trans (Nat.le_max_right i (max j k)),
            (Nat.le_max_right j k).trans (Nat.le_max_right i (max j k))])
  have hLHS : {x ∈ Δ | ∀ p ∈ [(i, true), (j, true), (k, false)], (p.2 = true ↔ x ∈ X
    p.1)}
      = (Δ ∩ X i ∩ X j) \ X k := by
    ext x
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_sdiff, Set.mem_inter_iff]
    tauto
  have hRHS : {y ∈ U.master |
      ∀ p ∈ [(i, true), (j, true), (k, false)], (p.2 = true ↔ y ∈ Yseq split X Δ p.1)
    }
      = (U.master ∩ Yseq split X Δ i ∩ Yseq split X Δ j) \ Yseq split X Δ k := by
    ext y
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_sdiff, Set.mem_inter_iff]
    tauto
  rw [hLHS, hRHS] at key
  rw [← Set.sdiff_eq_empty, ← Set.sdiff_eq_empty, ← Set.not_nonempty_iff_eq_empty,
    ← Set.not_nonempty_iff_eq_empty, not_iff_not]
  exact key

theorem Yseq_subset_master (n : ℕ) : Yseq split X Δ n ⊆ U.master :=
  Set.iUnion_subset fun ?' => atomU_subset_master split X Δ hΔ hsplit (extendTrue ?')
    (n + 1)

theorem Yseq_zero_eq_master (h0 : X 0 = Δ) : Yseq split X Δ 0 = U.master := by
  set ? : ℕ → Bool := extendTrue (fun i : Fin 0 => i.elim0) with h?def
  have h?0 : ? 0 = true := by simp [h?def, extendTrue]
  have hAB : genAtom X Δ ? 0 = ∅ ↔ atomU split X Δ ? 0 = ∅ :=
    ⟨fun h => absurd h hΔ.ne_empty, fun h => absurd h U.master_mem.2.1.ne_empty⟩
  have hBU : atomU split X Δ ? 0 = ∅ ∨ U.mem (atomU split X Δ ? 0) := Or.inr U.
    master_mem
  have hspec := hsplit hAB hBU (X 0)
  have hJ : (split (genAtom X Δ ? 0) (atomU split X Δ ? 0) (X 0)).2 = ∅ := by
    rw [← hspec.2.2.2.1]
    show genAtom X Δ ? 0 \ X 0 = ∅
    rw [show genAtom X Δ ? 0 = Δ from rfl, h0]
    exact Set.sdiff_self
  have hI : (split (genAtom X Δ ? 0) (atomU split X Δ ? 0) (X 0)).1 = U.master := by
    have hunion := hspec.2.2.2.2.1
    rw [hJ, Set.union_empty] at hunion
    exact hunion
  have hkey : atomU split X Δ ? 1 = U.master := by rw [atomU_succ, h?0, ite_eq_left
    rfl]; exact hI
  apply Set.Subset.antisymm (Yseq_subset_master split X Δ hΔ hsplit 0)
  calc U.master = atomU split X Δ ? 1 := hkey.symm
    _ ⊆ Yseq split X Δ 0 := subset_Yseq split X Δ (fun i : Fin 0 => i.elim0)

theorem transfer_inter_eq_iff (i j k : ℕ) (hi : X i ⊆ Δ) (_hj : X j ⊆ Δ) (hk : X k ⊆
    Δ) :
    X i ∩ X j = X k ↔ Yseq split X Δ i ∩ Yseq split X Δ j = Yseq split X Δ k := by
  have h1 : X k ⊆ X i ↔ Yseq split X Δ k ⊆ Yseq split X Δ i := by
    have := transfer_subset_iff split X Δ hΔ hsplit k i
```

```
    rwa [Set.inter_eq_self_of_subset_right hk,
      Set.inter_eq_self_of_subset_right (Yseq_subset_master split X Δ hΔ hsplit k)] at
     this
  have h2 : X k ⊆ X j ↔ Yseq split X Δ k ⊆ Yseq split X Δ j := by
    have := transfer_subset_iff split X Δ hΔ hsplit k j
    rwa [Set.inter_eq_self_of_subset_right hk,
      Set.inter_eq_self_of_subset_right (Yseq_subset_master split X Δ hΔ hsplit k)] at
     this
  have h3 : X i ∩ X j ⊆ X k ↔ Yseq split X Δ i ∩ Yseq split X Δ j ⊆ Yseq split X Δ k
     := by
    have := transfer_double_subset_iff split X Δ hΔ hsplit i j k
    rwa [Set.inter_eq_self_of_subset_right hi,
      Set.inter_eq_self_of_subset_right (Yseq_subset_master split X Δ hΔ hsplit i)] at
     this
  constructor
  · intro heq
    have hki : X k ⊆ X i := heq ▸ Set.inter_subset_left
    have hkj : X k ⊆ X j := heq ▸ Set.inter_subset_right
    have hijk : X i ∩ X j ⊆ X k := heq ▸ subset_rfl
    exact Set.Subset.antisymm (h3.mp hijk) (Set.subset_inter (h1.mp hki) (h2.mp hkj))
  · intro heq
    have hki : Yseq split X Δ k ⊆ Yseq split X Δ i := heq ▸ Set.inter_subset_left
    have hkj : Yseq split X Δ k ⊆ Yseq split X Δ j := heq ▸ Set.inter_subset_right
    have hijk : Yseq split X Δ i ∩ Yseq split X Δ j ⊆ Yseq split X Δ k := heq ▸
    subset_rfl
    exact Set.Subset.antisymm (h3.mpr hijk) (Set.subset_inter (h1.mpr hki) (h2.mpr hkj
    ))

theorem Yseq_empty_or_mem (n : ℕ) : Yseq split X Δ n = ∅ ∨ U.mem (Yseq split X Δ n)
    := by
  by_cases hne : (Yseq split X Δ n).Nonempty
  · exact Or.inr (U.iUnion_mem
      (fun ?' => (atomU_invariant split X Δ hΔ hsplit (n + 1)).2.1 (extendTrue ?'))
    hne)
  · exact Or.inl (Set.not_nonempty_iff_eq_empty.mp hne)

theorem Yseq_nonempty_of_mem {n : ℕ} {x : α} (hxΔ : x ∈ Δ) (hxn : x ∈ X n) :
    (Yseq split X Δ n).Nonempty := by
  classical
  set ?0 : ℕ → Bool := fun k => decide (x ∈ X k) with h?0def
  have h?0n : ?0 n = true := by show decide (x ∈ X n) = true; rw [decide_eq_true_iff];
     exact hxn
  have hxA : x ∈ genAtom X Δ ?0 n := genAtom_self X Δ hxΔ n
  have hAX : x ∈ genAtom X Δ ?0 n ∩ X n := ⟨hxA, hxn⟩
  have hAne : (genAtom X Δ ?0 n ∩ X n).Nonempty := ⟨x, hAX⟩
  obtain ⟨hmatch, hmem, -⟩ := atomU_invariant split X Δ hΔ hsplit n
  have hspec := hsplit (hmatch ?0) (hmem ?0) (X n)
  have hIne : (split (genAtom X Δ ?0 n) (atomU split X Δ ?0 n) (X n)).1 = ∅ :=
    fun h => hAne.ne_empty (hspec.2.2.1.mpr h)
  have hI_eq_atomU : (split (genAtom X Δ ?0 n) (atomU split X Δ ?0 n) (X n)).1 =
      atomU split X Δ ?0 (n + 1) := by rw [atomU_succ, h?0n, ite_eq_left rfl]
  set ?2 : ℕ → Bool := extendTrue (restrictFin ?0 n) with h?2def
  have hagree : ∀ i < n + 1, ?2 i = ?0 i := by
    intro i hi
    rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
    · exact extendTrue_restrictFin_agree ?0 n i hi'
```

```
    · simp [h?2def, extendTrue, h?0n]
  have h?2_eq : atomU split X Δ ?2 (n + 1) = atomU split X Δ ?0 (n + 1) :=
    atomU_congr split X Δ hagree
  have hne2 : (atomU split X Δ ?2 (n + 1)).Nonempty := by
    rw [h?2_eq, ← hI_eq_atomU]
    exact Set.nonempty_iff_ne_empty.mpr hIne
  exact hne2.mono (subset_Yseq split X Δ (restrictFin ?0 n))

end

section
open NeighborhoodSystem
variable {α : Type*}

open Classical in

open Classical in

theorem splitChoice_isSplitSpec : SplitSpec (α := α) splitChoice := by
  intro A B hAB hBU Xn
  classical
  unfold splitChoice
  rw [dite_eq_left ⟨hAB, hBU⟩]
  exact (exists_split hAB hBU Xn).choose_spec.choose_spec

end

end DomainTheory.NeighbourhoodSystems
```

3.9.9 Theorem 8.8 — universality of U

THEOREM 8.8. The system $\mathcal{U}$ is universal in the sense that, for every countable neighbourhood system $\mathcal{D}$, we have

$$\mathcal{D} \trianglelefteq \mathcal{U}.$$

Moreover, if $\mathcal{D}$ is effectively given, then the projection pair making the embedding can be taken as computable. Indeed there is a correspondence between effectively presented domains and the computable, finitary projections of $\mathcal{U}$.

Proof: As $\mathcal{D}$ is countable, we can assume that

$$\mathcal{D} = \{X_n \mid n \in \mathbb{N}\},$$

where $\mathcal{D}$ is a system over a set Δ (say, $X_0 = \Delta$). We shall do the effective and general cases together, where for the latter all remarks on recursiveness are just left out. So, if we want $\mathcal{D}$ effectively given, the above enumeration should be taken as the computable presentation.

Without loss of generality we can assume $\mathcal{D} \cong \mathcal{D}^\dagger$, since otherwise we would just replace $\mathcal{D}$ by $\mathcal{D}^\dagger$. The advantage of this preparation is that unions in $\mathcal{D}^\dagger$ keep things rather *separate* (as we noticed in constructing $\mathbb{P}\mathcal{D}$). In particular, we can be sure of this equivalence:

$$(\blacklozenge) \qquad X_m \subseteq \bigcup_{i<k} X_{n_i} \quad \text{iff} \quad \exists i < k.\, X_m \subseteq X_{n_i}.$$

This property, for example, fails for the system $\mathcal{U}$ as presented in Definition 8.7. However, that observation is of no moment, because we are employing the assumption with respect to $\mathcal{D}$ not $\mathcal{U}$.

The reason for the assumption is this: for $\delta \in \{+,-\}$ define for $X \in \mathcal{D}$:

$$\begin{aligned} \delta X &= X \qquad \text{if } \delta = +; \\ &= \Delta \setminus X \quad \text{if } \delta = -. \end{aligned}$$

(A similar notation will be used for $Y \in \mathcal{U}$.) Then for $\delta \in \{+,-\}^n$ the sets of the form

$$\bigcap_{i<n} \delta_i X_i \quad (= X_\delta, \text{ for short})$$

form a partition of Δ into (at most) 2^n parts. The reason for assumption ($\blacklozenge$) is that we can effectively decide for each $\delta \in \{+,-\}^n$ whether one of these intersections is empty or not. (Why? — assuming that $\mathcal{D}$ is effectively given, of course). If for some reason we had not wanted to pass to $\mathcal{D}^\dagger$, we could have made this stronger assumption of decidability on the (positive) system $\mathcal{D}$. ($\mathcal{U}$, for example, satisfies it.)

Suppose, corresponding to $X_0, X_1, \ldots, X_{n-1}$, we have selected $Y_0, Y_1, \ldots, Y_{n-1} \in \mathcal{U}$ so that, for all $\delta \in \{+,-\}^n$,

$$(\blacksquare) \qquad \bigcap_{i<n} \delta_i X_i = \emptyset \quad \text{iff} \quad \bigcap_{i<n} \delta_i Y_i = \emptyset.$$

We wish to show - effectively - how to choose Y_n corresponding to X_n, so that ($\blacksquare$) holds with $n+1$ replacing n. Proceeding inductively, we obtain a recursive enumeration of sets $Y_n \in \mathcal{U}$ so that

$$\mathcal{D} \equiv \{Y_n \mid n \in \mathbb{N}\} \lhd \mathcal{U}.$$

Clearly the isomorphism (matching X_i to Y_i) will be computable and the projection is computable. (It will then remain only to consider the arbitrary finitary computable projection to complete the proof of the theorem.)

So, consider X_n; for each $\delta \in \{+,-\}^n$ there are four cases:

$$\begin{aligned} X_\delta \cap X_n = \emptyset, \quad X_\delta \cap -X_n = \emptyset, \\ X_\delta \cap X_n \neq \emptyset, \quad X_\delta \cap -X_n \neq \emptyset. \end{aligned}$$

Corresponding to X_δ is a similar intersection Y_δ. If X_δ were $\emptyset$, then Y_δ would be also. If not, $Y_\delta \subseteq [0,1)$ is a union of rational intervals that can be written down explicitly. (Why?) In our four cases on X_n, the first implies the fourth. (Why?) Thus, we need only make some choices in these circumstances:

$$\begin{aligned} X_\delta \cap X_n = \emptyset &: \text{choose } I_{\delta,n} = \emptyset; \\ X_\delta \cap -X_n = \emptyset &: \text{choose } I_{\delta,n} = Y_\delta; \\ \text{otherwise} &: \text{choose } I_{\delta,n} \subseteq Y_\delta, \text{ with } \emptyset \neq I_{\delta,n} \neq Y_\delta. \end{aligned}$$

All these cases are decidable by assumption on $\mathcal{D}$, and the effective choice of (unions of) intervals is effective by construction of $\mathcal{U}$. Now set

$$Y_n = \bigcup_{\delta \in \{+,-\}^n} I_{\delta,n} \neq \emptyset.$$

The set $Y_n \in \mathcal{U}$, it can be found effectively, and ($\blacksquare$) is obviously satisfied for $n+1$.

Finally, suppose that a is a computable, finitary projection of $\mathcal{U}$. As we have seen in the proof of 8.5, the domain corresponding to the range of a is isomorphic to the neighbourhood system

$$\{Y \in \mathcal{U} \mid Y \; a \; Y\} \triangleleft \mathcal{U}.$$

Clearly, if a as a set of ordered pairs of neighbourhoods is recursively enumerable, then the above set is also recursively enumerable (because equality between neighbourhoods is decidable). It follows easily that the subsystem is effectively given as a neighbourhood system in its own right. □

We have now proved that $\mathcal{U}$ is a nice and big domain that is nicely behaved with respect to computable mappings. It has some very interesting subdomains; to name a few:

$$\mathcal{U}+\mathcal{U}, \quad \mathcal{U}\oplus\mathcal{U}, \quad \mathcal{U}\times\mathcal{U}, \quad \mathcal{U}\otimes\mathcal{U}$$

$$\mathcal{U}_\perp, \quad \mathcal{U}^\infty, \quad \mathcal{U}^\S, \quad \mathbb{P}\mathcal{U}, \quad \mathcal{U}\to\mathcal{U}$$

That all of these are $\trianglelefteq \mathcal{U}$ follows from knowing that they are all effectively presented. What we wish to check next is that they all combine well with respect to projections. To this end the explicit definitions are given for the constructs $+$, $\times$, and $\to$, and the details of the others are left for the exercises.

DiagFixed.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_6
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α}

def DiagFixed (P : ComputablePresentation V) (a : ApproximableMap V V) (n : ℕ) : Prop
    :=
  a.rel (P.X n) (P.X n)

theorem diagFixed_iff_fixedNbhd_mem (P : ComputablePresentation V) (a :
    ApproximableMap V V)
    (n : ℕ) : DiagFixed P a n ↔ (fixedNbhd a).mem (P.X n) :=
  (and_iff_right (P.mem_X n)).symm

theorem diagFixed_isREPred {P : ComputablePresentation V} {a : ApproximableMap V V}
    (ha : ComputableMap P P a) : REPred (DiagFixed P a) := by
  have ha' : REPred (fun t : ℕ => a.rel (P.X t.unpair.1) (P.X t.unpair.2)) := ha.out
  have hdiag : Nat.Primrec (fun n : ℕ => Nat.pair n n) := primrec_id.pair primrec_id
  refine REPred.of_iff (fun n => ?_) (ha'.comp hdiag)
  simp only [unpair_pair_fst, unpair_pair_snd]
  exact Iff.rfl
```

```
theorem diagFixed_exists_qChar {P : ComputablePresentation V} {a : ApproximableMap V V
    }
    (ha : ComputableMap P P a) :
    ∃ qChar : ℕ → ℕ, Nat.Primrec qChar ∧
      ∀ n, DiagFixed P a n ↔ ∃ i, qChar (Nat.pair i n) = 1 := by
  obtain ⟨q, hq, hqe⟩ := diagFixed_isREPred ha
  obtain ⟨f, hf, hfe⟩ := hq
  exact ⟨f, hf, fun n => (hqe n).trans (exists_congr (fun i => hfe _))⟩

end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
  (qChar cons : ℕ → ℕ)

def myStep (r e : ℕ) : ℕ :=
  selectFn (isOne (qChar e) * isOne (cons (Nat.pair r e.unpair.2)))
    (P.inter r e.unpair.2) r

def myFold (l : List ℕ) : ℕ := l.foldl (myStep P qChar cons) P.masterIdx

@[simp] theorem myFold_nil : myFold P qChar cons [] = P.masterIdx := rfl

end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
  (qChar cons : ℕ → ℕ)
variable {P qChar cons}
variable (P qChar cons)

def myStepCode (w : ℕ) : ℕ := myStep P qChar cons w.unpair.2.unpair.1 w.unpair.1

def myFoldCode (c : ℕ) : ℕ := foldCode (myStepCode P qChar cons) 0 P.masterIdx c

end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
  (qChar cons : ℕ → ℕ)
variable {P qChar cons}

theorem diagFixed_masterIdx (a : ApproximableMap V V) : DiagFixed P a P.masterIdx :=
    by
  show a.rel (P.X P.masterIdx) (P.X P.masterIdx)
  rw [P.masterIdx_spec]
  exact a.master_rel
end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
  (qChar cons : ℕ → ℕ)
```

```
variable {P qChar cons}
variable (P qChar cons)

theorem myFoldCode_eq (c : ℕ) : myFoldCode P qChar cons c = myFold P qChar cons (
    decodeList c) := by
  have hfun : (fun (acc x : ℕ) => myStepCode P qChar cons (Nat.pair x (Nat.pair acc 0)
    ))
      = myStep P qChar cons := by
    funext acc x
    unfold myStepCode
    simp only [unpair_pair_fst, unpair_pair_snd]
  unfold myFoldCode myFold
  rw [foldCode_eq', hfun]
end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
  (qChar cons : ℕ → ℕ)

theorem myFold_cons (e : ℕ) (rest : List ℕ) :
    myFold P qChar cons (e :: rest) = rest.foldl (myStep P qChar cons) (myStep P qChar
     cons P.masterIdx e) := by
  unfold myFold; rw [List.foldl_cons]
end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
  (qChar cons : ℕ → ℕ)
variable {P qChar cons}

theorem myStep_diagFixed_of_diagFixed {a : ApproximableMap V V}
    (hqChar : ∀ n, DiagFixed P a n ↔ ∃ i, qChar (Nat.pair i n) = 1)
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m)
    {r : ℕ} (hr : DiagFixed P a r) (e : ℕ) :
    DiagFixed P a (myStep P qChar cons r e) := by
  unfold myStep
  have hq_dec : ((qChar e) = 1) ∨ ((qChar e) = 1) := by
    by_cases hq : (qChar e) = 1
    · exact Or.inr hq
    · exact Or.inl hq
  rcases hq_dec with hq | hq
  · rw [isOne_of_ne_one hq, Nat.zero_mul, selectFn_zero]
    exact hr
  · rw [(isOne_eq_one_iff _).mpr hq, Nat.one_mul]
    have hc_dec : ((cons (Nat.pair r e.unpair.2)) = 1) ∨ ((cons (Nat.pair r e.unpair
    .2)) = 1) := by
      by_cases hc : (cons (Nat.pair r e.unpair.2)) = 1
      · exact Or.inr hc
      · exact Or.inl hc
    rcases hc_dec with hc | hc
    · rw [isOne_of_ne_one hc, selectFn_zero]
      exact hr
    · rw [(isOne_eq_one_iff _).mpr hc, selectFn_one]
      have hn : DiagFixed P a e.unpair.2 :=
```

```
        (hqChar e.unpair.2).mpr ⟨e.unpair.1, by rw [pair_unpair]; exact hq⟩
      obtain ⟨k, hk⟩ := (hcons r e.unpair.2).mp hc
      have hVinter : V.mem (P.X r ∩ P.X e.unpair.2) := by
        rw [← P.inter_spec ⟨k, hk⟩]; exact P.mem_X _
      have hfix : (fixedNbhd a).mem (P.X r ∩ P.X e.unpair.2) :=
        (fixedNbhd_subsystem a).inter_closed ((diagFixed_iff_fixedNbhd_mem P a r).mp
    hr)
          ((diagFixed_iff_fixedNbhd_mem P a e.unpair.2).mp hn) hVinter
      rw [diagFixed_iff_fixedNbhd_mem, P.inter_spec ⟨k, hk⟩]
      exact hfix

theorem myFold_diagFixed_of_diagFixed {a : ApproximableMap V V}
    (hqChar : ∀ n, DiagFixed P a n ↔ ∃ i, qChar (Nat.pair i n) = 1)
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m) (l : List ℕ
    ) :
    ∀ {r : ℕ}, DiagFixed P a r → DiagFixed P a (l.foldl (myStep P qChar cons) r) := by
  induction l with
  | nil => intro r hr; simpa using hr
  | cons e rest ih =>
    intro r hr
    rw [List.foldl_cons]
    exact ih (myStep_diagFixed_of_diagFixed hqChar hcons hr e)

theorem myFold_diagFixed {a : ApproximableMap V V}
    (hqChar : ∀ n, DiagFixed P a n ↔ ∃ i, qChar (Nat.pair i n) = 1)
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m) (l : List ℕ
    ) :
    DiagFixed P a (myFold P qChar cons l) :=
  myFold_diagFixed_of_diagFixed hqChar hcons l (diagFixed_masterIdx a)

end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
  (qChar cons : ℕ → ℕ)
variable {P qChar cons}
variable (P qChar cons)

theorem diagFixed_myFoldCode {a : ApproximableMap V V}
    (hqChar : ∀ n, DiagFixed P a n ↔ ∃ i, qChar (Nat.pair i n) = 1)
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m) (c : ℕ) :
    DiagFixed P a (myFoldCode P qChar cons c) := by
  rw [myFoldCode_eq]
  exact myFold_diagFixed hqChar hcons (decodeList c)

theorem primrec_myStepCode (hqCharp : Nat.Primrec qChar) (hconsp : Nat.Primrec cons) :
    Nat.Primrec (myStepCode P qChar cons) := by
  have he : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hr : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.right
  have he2 : Nat.Primrec (fun w : ℕ => w.unpair.1.unpair.2) := Nat.Primrec.right.comp
    he
  have hargs : Nat.Primrec (fun w : ℕ => Nat.pair w.unpair.2.unpair.1 w.unpair.1.
    unpair.2) :=
    hr.pair he2
```

```
  have hqchar_e : Nat.Primrec (fun w : ℕ => qChar w.unpair.1) := hqCharp.comp he
  have hcons_val : Nat.Primrec
      (fun w : ℕ => cons (Nat.pair w.unpair.2.unpair.1 w.unpair.1.unpair.2)) :=
    hconsp.comp hargs
  have hcond : Nat.Primrec (fun w : ℕ =>
      isOne (qChar w.unpair.1) ⋆ isOne (cons (Nat.pair w.unpair.2.unpair.1 w.unpair.1.
    unpair.2))) :=
    primrec_mul₂ (primrec_isOne.comp hqchar_e) (primrec_isOne.comp hcons_val)
  have hinter : Nat.Primrec
      (fun w : ℕ => P.inter w.unpair.2.unpair.1 w.unpair.1.unpair.2) :=
    (P.inter_primrec.comp hargs).of_eq fun w => by simp only [unpair_pair_fst,
    unpair_pair_snd]
  exact (primrec_selectFn hcond hinter hr).of_eq fun _ => rfl

theorem primrec_myFoldCode (hqCharp : Nat.Primrec qChar) (hconsp : Nat.Primrec cons) :
    Nat.Primrec (myFoldCode P qChar cons) :=
  (primrec_foldCode (primrec_myStepCode P qChar cons hqCharp hconsp)
    (Nat.Primrec.const 0) (Nat.Primrec.const P.masterIdx) primrec_id).of_eq
    fun _ => rfl

end

end DomainTheory.NeighbourhoodSystems
```

D_X.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.DiagFixed
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
  (qChar cons : ℕ → ℕ)

def D_X (c : ℕ) : Set α := P.X (myFoldCode P qChar cons c)
end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
  (qChar cons : ℕ → ℕ)
variable {P qChar cons}

theorem D_X_mem {a : ApproximableMap V V}
    (hqChar : ∀ n, DiagFixed P a n ↔ ∃ i, qChar (Nat.pair i n) = 1)
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m) (c : ℕ) :
    (fixedNbhd a).mem (D_X P qChar cons c) :=
  (diagFixed_iff_fixedNbhd_mem P a _).mp (diagFixed_myFoldCode P qChar cons hqChar
```

```
    hcons c)

theorem D_X_of_diagFixed {a : ApproximableMap V V}
    (hqChar : ∀ n, DiagFixed P a n ↔ ∃ i, qChar (Nat.pair i n) = 1)
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m)
    {m : ℕ} (hm : DiagFixed P a m) : ∃ c, D_X P qChar cons c = P.X m := by
  obtain ⟨i, hi⟩ := (hqChar m).mp hm
  refine ⟨encodeList [Nat.pair i m], ?_⟩
  have hstep : myFoldCode P qChar cons (encodeList [Nat.pair i m])
      = myStep P qChar cons P.masterIdx (Nat.pair i m) := by
    rw [myFoldCode_eq, decodeList_encodeList]
    unfold myFold
    rw [List.foldl_cons, List.foldl_nil]
  have hcond : cons (Nat.pair P.masterIdx m) = 1 := by
    apply (hcons P.masterIdx m).mpr
    refine ⟨m, ?_⟩
    have hsub : P.X m ⊆ V.master := V.sub_master (P.mem_X m)
    rw [P.masterIdx_spec]
    exact Set.subset_inter hsub subset_rfl
  have hstepval : myStep P qChar cons P.masterIdx (Nat.pair i m)
      = P.inter P.masterIdx m := by
    unfold myStep
    simp only [unpair_pair_snd]
    rw [(isOne_eq_one_iff _).mpr hi, (isOne_eq_one_iff _).mpr hcond, Nat.one_mul,
    selectFn_one]
  show D_X P qChar cons (encodeList [Nat.pair i m]) = P.X m
  unfold D_X
  rw [hstep, hstepval]
  have hcons' : (∃ k, P.X k ⊆ P.X P.masterIdx ∩ P.X m) := (hcons P.masterIdx m).mp
    hcond
  rw [P.inter_spec hcons', P.masterIdx_spec, Set.inter_eq_right.mpr (V.sub_master (P.
    mem_X m))]

theorem D_X_surj {a : ApproximableMap V V}
    (hqChar : ∀ n, DiagFixed P a n ↔ ∃ i, qChar (Nat.pair i n) = 1)
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m)
    {Y : Set α} (hY : (fixedNbhd a).mem Y) : ∃ c, D_X P qChar cons c = Y := by
  obtain ⟨hYV, hYa⟩ := hY
  obtain ⟨n₀, hn₀⟩ := P.surj hYV
  have hdiag : DiagFixed P a n₀ := by unfold DiagFixed; rw [hn₀]; exact hYa
  obtain ⟨c, hc⟩ := D_X_of_diagFixed hqChar hcons hdiag
  exact ⟨c, by rw [hc, hn₀]⟩

theorem D_X_cons_iff {a : ApproximableMap V V}
    (hqChar : ∀ n, DiagFixed P a n ↔ ∃ i, qChar (Nat.pair i n) = 1)
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m) (c₁ c₂ : ℕ)
    :
    (∃ k, D_X P qChar cons k ⊆ D_X P qChar cons c₁ ∩ D_X P qChar cons c₂) ↔
      (∃ k, P.X k ⊆ P.X (myFoldCode P qChar cons c₁) ∩ P.X (myFoldCode P qChar cons c₂)
    ) := by
  set n₁ := myFoldCode P qChar cons c₁ with hn₁
  set n₂ := myFoldCode P qChar cons c₂ with hn₂
  constructor
  · rintro ⟨k, hk⟩
    exact ⟨myFoldCode P qChar cons k, hk⟩
  · rintro ⟨k, hk⟩
```

```
    have hn1 : DiagFixed P a n₁ := diagFixed_myFoldCode P qChar cons hqChar hcons c₁
    have hn2 : DiagFixed P a n₂ := diagFixed_myFoldCode P qChar cons hqChar hcons c₂
    have hVmem : V.mem (P.X n₁ ∩ P.X n₂) := by
      rw [← P.inter_spec ⟨k, hk⟩]; exact P.mem_X _
    have hfix : (fixedNbhd a).mem (P.X n₁ ∩ P.X n₂) :=
      (fixedNbhd_subsystem a).inter_closed ((diagFixed_iff_fixedNbhd_mem P a n₁).mp hn1
    )
        ((diagFixed_iff_fixedNbhd_mem P a n₂).mp hn2) hVmem
    have hm : DiagFixed P a (P.inter n₁ n₂) := by
      rw [diagFixed_iff_fixedNbhd_mem, P.inter_spec ⟨k, hk⟩]; exact hfix
    obtain ⟨c, hc⟩ := D_X_of_diagFixed hqChar hcons hm
    have heq : D_X P qChar cons c = D_X P qChar cons c₁ ∩ D_X P qChar cons c₂ := by
      rw [hc, P.inter_spec ⟨k, hk⟩]
      unfold D_X
      rw [← hn₁, ← hn₂]
    exact ⟨c, heq ▶ subset_rfl⟩

end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
  (qChar cons : ℕ → ℕ)
variable {P qChar cons}
variable (P qChar cons)

theorem D_X_cons_computable {a : ApproximableMap V V}
    (hqChar : ∀ n, DiagFixed P a n ↔ ∃ i, qChar (Nat.pair i n) = 1)
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m)
    (hqCharp : Nat.Primrec qChar) (hconsp : Nat.Primrec cons) :
    RecDecidable₂ (fun c₁ c₂ =>
      ∃ k, D_X P qChar cons k ⊆ D_X P qChar cons c₁ ∩ D_X P qChar cons c₂) := by
  have hmf : Nat.Primrec (myFoldCode P qChar cons) := primrec_myFoldCode P qChar cons
    hqCharp hconsp
  have hreindex : Nat.Primrec (fun t : ℕ =>
      Nat.pair (myFoldCode P qChar cons t.unpair.1) (myFoldCode P qChar cons t.unpair
    .2)) :=
    (hmf.comp Nat.Primrec.left).pair (hmf.comp Nat.Primrec.right)
  refine RecDecidable.of_iff (fun t => ?_) (P.cons_computable.comp hreindex)
  simp only [unpair_pair_fst, unpair_pair_snd]
  exact D_X_cons_iff hqChar hcons t.unpair.1 t.unpair.2

theorem D_X_interEq_computable (hqCharp : Nat.Primrec qChar) (hconsp : Nat.Primrec
    cons) :
    RecDecidable₃ (fun c₁ c₂ c₃ =>
      D_X P qChar cons c₁ ∩ D_X P qChar cons c₂ = D_X P qChar cons c₃) := by
  have hmf : Nat.Primrec (myFoldCode P qChar cons) := primrec_myFoldCode P qChar cons
    hqCharp hconsp
  have hreindex : Nat.Primrec (fun t : ℕ =>
      Nat.pair (myFoldCode P qChar cons t.unpair.1)
        (Nat.pair (myFoldCode P qChar cons t.unpair.2.unpair.1)
          (myFoldCode P qChar cons t.unpair.2.unpair.2))) :=
    (hmf.comp Nat.Primrec.left).pair
      ((hmf.comp (Nat.Primrec.left.comp Nat.Primrec.right)).pair
        (hmf.comp (Nat.Primrec.right.comp Nat.Primrec.right)))
  refine RecDecidable.of_iff (fun t => ?_) (P.interEq_computable.comp hreindex)
```

```
  unfold D_X
  simp only [unpair_pair_fst, unpair_pair_snd]

end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
  (qChar cons : ℕ → ℕ)
variable {P qChar cons}

def D_inter (c₁ c₂ : ℕ) : ℕ := appendListCode c₁ c₂
end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
  (qChar cons : ℕ → ℕ)
variable {P qChar cons}
variable (P qChar cons)
variable {P qChar cons}

theorem D_X_inter_eq (c₁ c₂ : ℕ) :
    D_X P qChar cons (D_inter c₁ c₂) =
      P.X ((decodeList c₂).foldl (myStep P qChar cons) (myFoldCode P qChar cons c₁)) :=
     by
  have h1 : D_X P qChar cons (D_inter c₁ c₂) =
      P.X ((decodeList c₁ ++ decodeList c₂).foldl (myStep P qChar cons) P.masterIdx) :=
     by
    show P.X (myFoldCode P qChar cons (appendListCode c₁ c₂)) = _
    rw [myFoldCode_eq, appendListCode_eq]
    rfl
  have heq1 : (decodeList c₁).foldl (myStep P qChar cons) P.masterIdx =
      myFoldCode P qChar cons c₁ := (myFoldCode_eq P qChar cons c₁).symm
  rw [h1, List.foldl_append, heq1]
end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
  (qChar cons : ℕ → ℕ)
variable {P qChar cons}
variable (P qChar cons)

theorem D_inter_primrec : Nat.Primrec (fun t => D_inter t.unpair.1 t.unpair.2) :=
  primrec_appendListCode
end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
  (qChar cons : ℕ → ℕ)
variable {P qChar cons}

theorem myStep_subset
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m) (r e : ℕ) :
```

```
    P.X (myStep P qChar cons r e) ⊆ P.X r := by
  unfold myStep
  have hq_dec : ((qChar e) = 1) ∨ ((qChar e) = 1) := by
    by_cases hq : (qChar e) = 1
    · exact Or.inr hq
    · exact Or.inl hq
  rcases hq_dec with hq | hq
  · rw [isOne_of_ne_one hq, Nat.zero_mul, selectFn_zero]
  · rw [(isOne_eq_one_iff _).mpr hq, Nat.one_mul]
    have hc_dec : ((cons (Nat.pair r e.unpair.2)) = 1) ∨ ((cons (Nat.pair r e.unpair
    .2)) = 1) := by
      by_cases hc : (cons (Nat.pair r e.unpair.2)) = 1
      · exact Or.inr hc
      · exact Or.inl hc
    rcases hc_dec with hc | hc
    · rw [isOne_of_ne_one hc, selectFn_zero]
    · rw [(isOne_eq_one_iff _).mpr hc, selectFn_one, P.inter_spec ((hcons r e.unpair.2)
    .mp hc)]
      exact Set.inter_subset_left

theorem myFoldl_subset
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m) :
    ∀ (l : List ℕ) (r : ℕ), P.X (l.foldl (myStep P qChar cons) r) ⊆ P.X r := by
  intro l
  induction l with
  | nil => intro r; simp only [List.foldl_nil]; exact subset_rfl
  | cons e rest ih =>
    intro r
    rw [List.foldl_cons]
    exact (ih (myStep P qChar cons r e)).trans (myStep_subset hcons r e)

theorem myFoldl_inter_of_le
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m) :
    ∀ (l : List ℕ) {n r : ℕ}, P.X n ⊆ P.X r →
      (∃ k, P.X k ⊆ P.X n ∩ P.X (l.foldl (myStep P qChar cons) r)) →
      P.X (l.foldl (myStep P qChar cons) n) = P.X n ∩ P.X (l.foldl (myStep P qChar
    cons) r) := by
  intro l
  induction l with
  | nil =>
    intro n r hnr _
    simp only [List.foldl_nil]
    exact (Set.inter_eq_left.mpr hnr).symm
  | cons e rest ih =>
    intro n r hnr hk
    simp only [List.foldl_cons] at hk ⊢
    have hq_dec : ((qChar e) = 1) ∨ ((qChar e) = 1) := by
      by_cases hq : (qChar e) = 1
      · exact Or.inr hq
      · exact Or.inl hq
    rcases hq_dec with hq | hq
    · have hstepR : myStep P qChar cons r e = r := by
        unfold myStep; rw [isOne_of_ne_one hq, Nat.zero_mul, selectFn_zero]
      have hstepN : myStep P qChar cons n e = n := by
        unfold myStep; rw [isOne_of_ne_one hq, Nat.zero_mul, selectFn_zero]
      rw [hstepR] at hk ⊢
```

```
  rw [hstepN]
  exact ih hnr hk
· have hc_dec : ((cons (Nat.pair r e.unpair.2)) = 1) ∨ ((cons (Nat.pair r e.unpair
.2)) = 1) := by
    by_cases hc : (cons (Nat.pair r e.unpair.2)) = 1
    · exact Or.inr hc
    · exact Or.inl hc
  rcases hc_dec with hc | hc
  · have hstepR : myStep P qChar cons r e = r := by
      unfold myStep
      rw [(isOne_eq_one_iff _).mpr hq, Nat.one_mul, isOne_of_ne_one hc,
selectFn_zero]
    have hcN : cons (Nat.pair n e.unpair.2) = 1 := by
      intro hcn
      obtain ⟨w, hw⟩ := (hcons n e.unpair.2).mp hcn
      exact hc ((hcons r e.unpair.2).mpr
        ⟨w, hw.trans (Set.inter_subset_inter_left _ hnr)⟩)
    have hstepN : myStep P qChar cons n e = n := by
      unfold myStep
      rw [(isOne_eq_one_iff _).mpr hq, Nat.one_mul, isOne_of_ne_one hcN,
selectFn_zero]
    rw [hstepR] at hk ⊢
    rw [hstepN]
    exact ih hnr hk
  · obtain ⟨w0, hw0⟩ := (hcons r e.unpair.2).mp hc
    have hstepR : myStep P qChar cons r e = P.inter r e.unpair.2 := by
      unfold myStep
      rw [(isOne_eq_one_iff _).mpr hq, Nat.one_mul, (isOne_eq_one_iff _).mpr hc,
selectFn_one]
    rw [hstepR] at hk ⊢
    obtain ⟨k, hkk⟩ := hk
    have hYsub : P.X (rest.foldl (myStep P qChar cons) (P.inter r e.unpair.2))
        ⊆ P.X e.unpair.2 := by
      refine (myFoldl_subset hcons rest (P.inter r e.unpair.2)).trans ?_
      rw [P.inter_spec ⟨w0, hw0⟩]
      exact Set.inter_subset_right
    have hkR : P.X k ⊆ P.X n := hkk.trans Set.inter_subset_left
    have hkY : P.X k ⊆ P.X (rest.foldl (myStep P qChar cons) (P.inter r e.unpair
.2)) :=
      hkk.trans Set.inter_subset_right
    have hkne : P.X k ⊆ P.X e.unpair.2 := hkY.trans hYsub
    have hwitN : ∃ k, P.X k ⊆ P.X n ∩ P.X e.unpair.2 := ⟨k, Set.subset_inter hkR
hkne⟩
    have hcN : cons (Nat.pair n e.unpair.2) = 1 := (hcons n e.unpair.2).mpr hwitN
    have hstepN : myStep P qChar cons n e = P.inter n e.unpair.2 := by
      unfold myStep
      rw [(isOne_eq_one_iff _).mpr hq, Nat.one_mul, (isOne_eq_one_iff _).mpr hcN,
selectFn_one]
    rw [hstepN]
    have hnr' : P.X (P.inter n e.unpair.2) ⊆ P.X (P.inter r e.unpair.2) := by
      rw [P.inter_spec hwitN, P.inter_spec ⟨w0, hw0⟩]
      exact Set.inter_subset_inter_left _ hnr
    have hk' : ∃ k', P.X k' ⊆ P.X (P.inter n e.unpair.2) ∩
        P.X (rest.foldl (myStep P qChar cons) (P.inter r e.unpair.2)) := by
      refine ⟨k, ?_⟩
      rw [P.inter_spec hwitN]
```

```
          exact Set.subset_inter (Set.subset_inter hkR hkne) hkY
        rw [ih hnr' hk', P.inter_spec hwitN, Set.inter_assoc, Set.inter_eq_right.mpr
    hYsub]

end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
  (qChar cons : ℕ → ℕ)
variable {P qChar cons}
variable (P qChar cons)
variable {P qChar cons}

theorem D_X_inter_spec
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m) {c₁ c₂ : ℕ}
    (h : ∃ k, D_X P qChar cons k ⊆ D_X P qChar cons c₁ ∩ D_X P qChar cons c₂) :
    D_X P qChar cons (D_inter c₁ c₂) = D_X P qChar cons c₁ ∩ D_X P qChar cons c₂ := by
  have heq2 : D_X P qChar cons c₂ =
      P.X ((decodeList c₂).foldl (myStep P qChar cons) P.masterIdx) := by
    show P.X (myFoldCode P qChar cons c₂) = _
    rw [myFoldCode_eq]
    rfl
  have hnr : P.X (myFoldCode P qChar cons c₁) ⊆ P.X P.masterIdx := by
    rw [P.masterIdx_spec]
    exact V.sub_master (P.mem_X _)
  have hk : ∃ k, P.X k ⊆ P.X (myFoldCode P qChar cons c₁) ∩
      P.X ((decodeList c₂).foldl (myStep P qChar cons) P.masterIdx) := by
    obtain ⟨k, hk0⟩ := h
    refine ⟨myFoldCode P qChar cons k, ?_⟩
    rw [← heq2]
    exact hk0
  rw [D_X_inter_eq, myFoldl_inter_of_le hcons (decodeList c₂) hnr hk, ← heq2]
  rfl
end

end DomainTheory.NeighbourhoodSystems
```

DAtom.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_6
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)

section
open NeighborhoodSystem Domain.Recursive
```

```
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)

def IPos (pos : List ℕ) : Set ℕ := {m | ∀ i ∈ pos, m ∈ idxSet P.X i}

@[simp] theorem IPos_nil : IPos P [] = Set.univ := by
  ext m; simp [IPos]

def DAtom (pos neg : List ℕ) : Set ℕ := IPos P pos ∩ {m | ∀ j ∈ neg, m ∈ idxSet P.X j}

end

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)
variable (cons : ℕ → ℕ)

def meetStep (r i : ℕ) : ℕ :=
  selectFn (isOne r.unpair.1 * isOne (cons (Nat.pair r.unpair.2 i)))
    (Nat.pair 1 (P.inter r.unpair.2 i)) (Nat.pair 0 r.unpair.2)

def meetFold (l : List ℕ) : ℕ := l.foldl (meetStep P cons) (Nat.pair 1 P.masterIdx)

@[simp] theorem meetFold_nil : meetFold P cons [] = Nat.pair 1 P.masterIdx := rfl

def meetStepCode (w : ℕ) : ℕ := meetStep P cons w.unpair.2.unpair.1 w.unpair.1

def meetFoldCode (c : ℕ) : ℕ := foldCode (meetStepCode P cons) 0 (Nat.pair 1 P.
    masterIdx) c

end

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)
variable (cons : ℕ → ℕ)
variable (incl : ℕ → ℕ)

def DAtomEmptyChar (posC negC : ℕ) : ℕ :=
  selectFn (isOne (meetFoldCode P cons posC).unpair.1)
    (existsListChar (fun t => incl (Nat.pair t.unpair.2 t.unpair.1))
      (meetFoldCode P cons posC).unpair.2 negC)
    1
end

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)

theorem IPos_cons (i : ℕ) (rest : List ℕ) :
    IPos P (i :: rest) = idxSet P.X i ∩ IPos P rest := by
  ext m
  simp only [IPos, Set.mem_ofPred_eq, List.mem_cons, mem_idxSet, Set.mem_inter_iff]
  constructor
  · intro h; exact ⟨h i (Or.inl rfl), fun j hj => h j (Or.inr hj)⟩
  · rintro ⟨hi, hrest⟩ j (rfl | hj)
    · exact hi
```

```
    · exact hrest j hj

theorem idxSet_masterIdx_eq_univ : idxSet P.X P.masterIdx = Set.univ :=
  Set.eq_univ_of_forall fun m => by
    show P.X m ⊆ P.X P.masterIdx
    rw [P.masterIdx_spec]
    exact D.sub_master (P.mem_X m)

end

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)
variable (cons : ℕ → ℕ)

theorem meetFoldCode_eq (c : ℕ) : meetFoldCode P cons c = meetFold P cons (decodeList
    c) := by
  have hfun : (fun (acc x : ℕ) => meetStepCode P cons (Nat.pair x (Nat.pair acc 0)))
      = meetStep P cons := by
    funext acc x
    unfold meetStepCode
    simp only [unpair_pair_fst, unpair_pair_snd]
  unfold meetFoldCode meetFold
  rw [foldCode_eq', hfun]

theorem meetFold_cons (i : ℕ) (rest : List ℕ) :
    meetFold P cons (i :: rest) = (rest.foldl (meetStep P cons) (meetStep P cons
      (Nat.pair 1 P.masterIdx) i)) := by
  unfold meetFold; rw [List.foldl_cons]

theorem meetStep_ok_le_one (r i : ℕ) : (meetStep P cons r i).unpair.1 ≤ 1 := by
  have h1 := isOne_le_one r.unpair.1
  have h2 := isOne_le_one (cons (Nat.pair r.unpair.2 i))
  unfold meetStep
  rcases (show isOne r.unpair.1 = 0 ∨ isOne r.unpair.1 = 1 by omega) with h | h
  · rw [h, Nat.zero_mul, selectFn_zero, unpair_pair_fst]; exact Nat.zero_le 1
  · rw [h, Nat.one_mul]
    rcases (show isOne (cons (Nat.pair r.unpair.2 i)) = 0 ∨
        isOne (cons (Nat.pair r.unpair.2 i)) = 1 by omega) with h' | h'
    · rw [h', selectFn_zero, unpair_pair_fst]; exact Nat.zero_le 1
    · rw [h', selectFn_one, unpair_pair_fst]

theorem meetStep_spec
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m)
    {init : ℕ} {S : Set ℕ} (hle : init.unpair.1 ≤ 1)
    (h1 : init.unpair.1 = 1 → idxSet P.X init.unpair.2 = S)
    (h0 : init.unpair.1 = 0 → S = ∅) (i : ℕ) :
    (meetStep P cons init i).unpair.1 ≤ 1 ∧
      ((meetStep P cons init i).unpair.1 = 1 →
        idxSet P.X (meetStep P cons init i).unpair.2 = S ∩ idxSet P.X i) ∧
      ((meetStep P cons init i).unpair.1 = 0 → S ∩ idxSet P.X i = ∅) := by
  refine ⟨meetStep_ok_le_one P cons init i, ?_, ?_⟩ <;>
    (unfold meetStep
     rcases (show init.unpair.1 = 0 ∨ init.unpair.1 = 1 by omega) with hi | hi)
  · rw [hi, isOne_zero, Nat.zero_mul, selectFn_zero, unpair_pair_fst]
    intro h; exact absurd h (by decide)
```

```
  · rw [hi, isOne_one, Nat.one_mul]
    have hc_dec : ((cons (Nat.pair init.unpair.2 i)) = 1) ∨ ((cons (Nat.pair init.
    unpair.2 i)) = 1) := by
      by_cases hc : (cons (Nat.pair init.unpair.2 i)) = 1
      · exact Or.inr hc
      · exact Or.inl hc
    rcases hc_dec with hc | hc
    · rw [isOne_of_ne_one hc, selectFn_zero, unpair_pair_fst]
      intro h; exact absurd h (by decide)
    · rw [(isOne_eq_one_iff _).mpr hc, selectFn_one, unpair_pair_snd, unpair_pair_fst]
      intro _
      have heq : P.X init.unpair.2 ∩ P.X i = P.X (P.inter init.unpair.2 i) :=
        (P.inter_spec (hcons _ _ |>.mp hc)).symm
      rw [← idxSet_inter_of_inter_eq (e := P.X) heq, h1 hi]
  · rw [hi, isOne_zero, Nat.zero_mul, selectFn_zero, unpair_pair_fst]
    intro _
    rw [h0 hi]; simp
  · rw [hi, isOne_one, Nat.one_mul]
    have hc_dec : ((cons (Nat.pair init.unpair.2 i)) = 1) ∨ ((cons (Nat.pair init.
    unpair.2 i)) = 1) := by
      by_cases hc : (cons (Nat.pair init.unpair.2 i)) = 1
      · exact Or.inr hc
      · exact Or.inl hc
    rcases hc_dec with hc | hc
    · rw [isOne_of_ne_one hc, selectFn_zero, unpair_pair_fst]
      intro _
      rw [← h1 hi]
      ext m
      simp only [Set.mem_inter_iff, Set.mem_empty_iff_false, iff_false, not_and]
      intro hm1 hm2
      exact hc ((hcons _ _).mpr ⟨m, Set.subset_inter hm1 hm2⟩)
    · rw [(isOne_eq_one_iff _).mpr hc, selectFn_one, unpair_pair_fst]
      intro h; exact absurd h (by decide)

theorem meetFold_foldl_spec
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m) (l : List ℕ
    ) :
    ∀ {init : ℕ} {S : Set ℕ}, init.unpair.1 ≤ 1 →
      (init.unpair.1 = 1 → idxSet P.X init.unpair.2 = S) → (init.unpair.1 = 0 → S =
    ∅) →
      (l.foldl (meetStep P cons) init).unpair.1 ≤ 1 ∧
        ((l.foldl (meetStep P cons) init).unpair.1 = 1 →
          idxSet P.X (l.foldl (meetStep P cons) init).unpair.2 = S ∩ IPos P l) ∧
        ((l.foldl (meetStep P cons) init).unpair.1 = 0 → S ∩ IPos P l = ∅) := by
  induction l with
  | nil =>
    intro init S hle h1 h0
    simpa using ⟨hle, h1, h0⟩
  | cons i rest ih =>
    intro init S hle h1 h0
    rw [List.foldl_cons, IPos_cons, ← Set.inter_assoc]
    obtain ⟨hle', h1', h0'⟩ := meetStep_spec P cons hcons hle h1 h0 i
    exact ih hle' h1' h0'

theorem meetFold_spec
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m) (pos : List
```

```
    ℕ) :
    (meetFold P cons pos).unpair.1 ≤ 1 ∧
      ((meetFold P cons pos).unpair.1 = 1 →
        idxSet P.X (meetFold P cons pos).unpair.2 = IPos P pos) ∧
      ((meetFold P cons pos).unpair.1 = 0 → IPos P pos = ∅) := by
  have hinit1 : (Nat.pair 1 P.masterIdx).unpair.1 = 1 := unpair_pair_fst 1 P.masterIdx
  have hinit2 : (Nat.pair 1 P.masterIdx).unpair.2 = P.masterIdx := unpair_pair_snd 1 P
    .masterIdx
  have h := meetFold_foldl_spec P cons hcons pos (init := Nat.pair 1 P.masterIdx) (S
    := Set.univ)
    (by rw [hinit1]) (fun _ => by rw [hinit2]; exact idxSet_masterIdx_eq_univ P)
    (fun h => absurd (hinit1.symm.trans h) (by norm_num))
  simpa only [meetFold, Set.univ_inter] using h

end

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)

theorem mem_IPos {pos : List ℕ} {m : ℕ} : m ∈ IPos P pos ↔ ∀ i ∈ pos, P.X m ⊆ P.X i
    := Iff.rfl

theorem mem_DAtom {pos neg : List ℕ} {m : ℕ} :
    m ∈ DAtom P pos neg ↔ (∀ i ∈ pos, P.X m ⊆ P.X i) ∧ (∀ j ∈ neg, ¬ P.X m ⊆ P.X j)
    := by
  simp only [DAtom, Set.mem_inter_iff, mem_IPos, Set.mem_ofPred_eq, mem_idxSet]

end

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)
variable (cons : ℕ → ℕ)

theorem DAtom_eq_empty_iff
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m) (pos neg :
    List ℕ) :
    DAtom P pos neg = ∅ ↔
      (meetFold P cons pos).unpair.1 = 1 ∨
        ∃ j ∈ neg, P.X (meetFold P cons pos).unpair.2 ⊆ P.X j := by
  obtain ⟨hle, h1, h0⟩ := meetFold_spec P cons hcons pos
  set r := meetFold P cons pos with hrdef
  rcases (show r.unpair.1 = 0 ∨ r.unpair.1 = 1 by omega) with hr | hr
  · have hIPos : IPos P pos = ∅ := h0 hr
    simp only [hr, ne_eq, zero_ne_one, not_false_eq_true, true_or, iff_true]
    ext m
    simp only [DAtom, hIPos, Set.mem_inter_iff, Set.mem_empty_iff_false, false_and,
      Set.mem_empty_iff_false]
  · have hIPos : idxSet P.X r.unpair.2 = IPos P pos := h1 hr
    simp only [hr, ne_eq, not_true_eq_false, false_or]
    constructor
    · intro hempty
      by_contra hcon
      push Not at hcon
      have hmem : r.unpair.2 ∈ DAtom P pos neg := by
```

```
        rw [mem_DAtom]
        refine ⟨fun i hi => ?_, fun j hj => ?_⟩
        · have hself : r.unpair.2 ∈ IPos P pos := hIPos ▸ self_mem_idxSet P.X r.unpair
    .2
          exact hself i hi
        · exact hcon j hj
      rw [hempty] at hmem
      exact absurd hmem (Set.notMem_empty _)
    · rintro ⟨j, hj, hsub⟩
      ext m
      simp only [Set.mem_empty_iff_false, iff_false]
      rintro hmem
      rw [mem_DAtom] at hmem
      have hmsub : P.X m ⊆ P.X r.unpair.2 := by
        have hmI : m ∈ IPos P pos := hmem.1
        rw [← hIPos] at hmI
        exact hmI
      exact hmem.2 j hj (hmsub.trans hsub)
end

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)
variable (cons : ℕ → ℕ)
variable (incl : ℕ → ℕ)

theorem DAtomEmptyChar_eq_one_iff
    (hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m)
    (hincl : ∀ n m, incl (Nat.pair n m) = 1 ↔ P.X n ⊆ P.X m) (posC negC : ℕ) :
    DAtomEmptyChar P cons incl posC negC = 1 ↔
      DAtom P (decodeList posC) (decodeList negC) = ∅ := by
  rw [DAtom_eq_empty_iff P cons hcons, ← meetFoldCode_eq]
  set r := meetFoldCode P cons posC with hrdef
  unfold DAtomEmptyChar
  by_cases hok : r.unpair.1 = 1
  · rw [(isOne_eq_one_iff _).mpr hok, selectFn_one, existsListChar_eq_one_iff]
    simp only [ne_eq, hok, not_true_eq_false, false_or]
    constructor
    · rintro ⟨j, hj, hgj⟩
      simp only [unpair_pair_fst, unpair_pair_snd] at hgj
      exact ⟨j, hj, (hincl _ _).mp hgj⟩
    · rintro ⟨j, hj, hsub⟩
      refine ⟨j, hj, ?_⟩
      simp only [unpair_pair_fst, unpair_pair_snd]
      exact (hincl _ _).mpr hsub
  · rw [isOne_of_ne_one hok, selectFn_zero]
    simp only [ne_eq, hok, not_false_eq_true, true_or]
end

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)
variable (cons : ℕ → ℕ)

theorem primrec_meetStepCode (hconsp : Nat.Primrec cons) : Nat.Primrec (meetStepCode P
    cons) := by
```

```
  have hx : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hr : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.right
  have hrok : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1.unpair.1) := Nat.Primrec.
    left.comp hr
  have hridx : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1.unpair.2) :=
    Nat.Primrec.right.comp hr
  have hconstest : Nat.Primrec (fun w : ℕ => cons (Nat.pair w.unpair.2.unpair.1.unpair
    .2 w.unpair.1)) :=
    hconsp.comp (hridx.pair hx)
  have hcond : Nat.Primrec
      (fun w : ℕ => isOne w.unpair.2.unpair.1.unpair.1 * isOne
        (cons (Nat.pair w.unpair.2.unpair.1.unpair.2 w.unpair.1))) :=
    primrec_mul₂ (primrec_isOne.comp hrok) (primrec_isOne.comp hconstest)
  have hinter : Nat.Primrec
      (fun w : ℕ => P.inter w.unpair.2.unpair.1.unpair.2 w.unpair.1) :=
    (P.inter_primrec.comp (hridx.pair hx)).of_eq
      (fun w => by simp only [unpair_pair_fst, unpair_pair_snd])
  have hthen : Nat.Primrec
      (fun w : ℕ => Nat.pair 1 (P.inter w.unpair.2.unpair.1.unpair.2 w.unpair.1)) :=
    (Nat.Primrec.const 1).pair hinter
  have helse : Nat.Primrec (fun w : ℕ => Nat.pair 0 w.unpair.2.unpair.1.unpair.2) :=
    (Nat.Primrec.const 0).pair hridx
  exact (primrec_selectFn hcond hthen helse).of_eq (fun _ => rfl)

theorem primrec_meetFoldCode (hconsp : Nat.Primrec cons) :
    Nat.Primrec (meetFoldCode P cons) :=
  (primrec_foldCode (primrec_meetStepCode P cons hconsp) (Nat.Primrec.const 0)
    (Nat.Primrec.const (Nat.pair 1 P.masterIdx)) primrec_id).of_eq (fun _ => rfl)

end

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)
variable (cons : ℕ → ℕ)
variable (incl : ℕ → ℕ)

theorem primrec_DAtomEmptyChar (hconsp : Nat.Primrec cons) (hinclp : Nat.Primrec incl)
    :
    Nat.Primrec (fun t => DAtomEmptyChar P cons incl t.unpair.1 t.unpair.2) := by
  have hmf : Nat.Primrec (fun t : ℕ => meetFoldCode P cons t.unpair.1) :=
    (primrec_meetFoldCode P cons hconsp).comp Nat.Primrec.left
  have hmfok : Nat.Primrec (fun t : ℕ => (meetFoldCode P cons t.unpair.1).unpair.1) :=
    Nat.Primrec.left.comp hmf
  have hmfidx : Nat.Primrec (fun t : ℕ => (meetFoldCode P cons t.unpair.1).unpair.2)
    :=
    Nat.Primrec.right.comp hmf
  have hg : Nat.Primrec (fun s : ℕ => incl (Nat.pair s.unpair.2 s.unpair.1)) :=
    hinclp.comp (Nat.Primrec.right.pair Nat.Primrec.left)
  have hexists : Nat.Primrec
      (fun t : ℕ => existsListChar (fun s => incl (Nat.pair s.unpair.2 s.unpair.1))
        (meetFoldCode P cons t.unpair.1).unpair.2 t.unpair.2) := by
    have hcomb : Nat.Primrec (fun t : ℕ =>
        Nat.pair t.unpair.2 (meetFoldCode P cons t.unpair.1).unpair.2) :=
      Nat.Primrec.right.pair hmfidx
```

```
    exact ((primrec_existsListChar hg).comp hcomb).of_eq
      (fun t => by simp only [unpair_pair_fst, unpair_pair_snd])
  exact (primrec_selectFn (primrec_isOne.comp hmfok) hexists (Nat.Primrec.const 1)).
    of_eq
    (fun _ => rfl)

theorem DAtom_recDecidable :
    RecDecidable₂ (fun posC negC => DAtom P (decodeList posC) (decodeList negC) = ∅) :=
     by
  obtain ⟨cons, hconsp, hconss⟩ := P.cons_computable
  obtain ⟨incl, hinclp, hincls⟩ := P.incl_computable
  have hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m := by
    intro n m
    have := hconss (Nat.pair n m)
    simpa only [unpair_pair_fst, unpair_pair_snd] using this.symm
  have hincl : ∀ n m, incl (Nat.pair n m) = 1 ↔ P.X n ⊆ P.X m := by
    intro n m
    have := hincls (Nat.pair n m)
    simpa only [unpair_pair_fst, unpair_pair_snd] using this.symm
  refine ⟨fun t => DAtomEmptyChar P cons incl t.unpair.1 t.unpair.2,
    primrec_DAtomEmptyChar P cons incl hconsp hinclp, fun t => ?_⟩
  exact (DAtomEmptyChar_eq_one_iff P cons incl hcons hincl t.unpair.1 t.unpair.2).symm

end

end DomainTheory.NeighbourhoodSystems
```

Theorem_8_8.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_6
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.DAtom
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.UX
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.splitU
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomUCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.YseqCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.DiagFixed
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.D_X
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    DprimeUPresentation
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    YseqCode_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    domainIsoCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    DprimeUCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomUCode_more

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    QPairCodes
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
```

```
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    VComputablePresentation
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open Domain.Recursive NeighborhoodSystem
section
open NeighborhoodSystem
variable {α : Type*}

theorem theorem_8_8_a.{u} {α : Type u} (D : NeighborhoodSystem α)
    [Countable {S : Set α // D.mem S}] :
    ∃ D' : NeighborhoodSystem ?, (D ≅? D') ∧ (D' ? U) := by
  have : Nonempty {S : Set α // D.mem S} := ⟨⟨D.master, D.master_mem⟩⟩
  obtain ⟨f, hf⟩ := exists_surjective_nat {S : Set α // D.mem S}
  set e : ℕ → Set α := fun n => if n = 0 then D.master else (f (n - 1)).1 with hedef
  have he0 : e 0 = D.master := ite_eq_left rfl
  have hen : ∀ n, e (n + 1) = (f n).1 := by
    intro n
    show (if n + 1 = 0 then D.master else (f (n + 1 - 1)).1) = (f n).1
    rw [ite_eq_right (Nat.succ_ne_zero n), Nat.succ_sub_one]
  have hcover : ∀ S, D.mem S ↔ ∃ n, S = e n := by
    intro S
    constructor
    · intro hS
      obtain ⟨k, hk⟩ := hf ⟨S, hS⟩
      exact ⟨k + 1, by rw [hen k]; exact (congrArg Subtype.val hk).symm⟩
    · rintro ⟨n, rfl⟩
      cases n with
      | zero => rw [he0]; exact D.master_mem
      | succ n => rw [hen n]; exact (f n).2
  exact ⟨DprimeU D e hcover he0, isomorphic_DprimeU D e hcover he0, DprimeU_subsystem D
    e hcover he0⟩

theorem theorem_8_8.{u} {α : Type u} (D : NeighborhoodSystem α)
    [Countable {S : Set α // D.mem S}] : D ? U := by
  obtain ⟨D', hiso, hsub⟩ := theorem_8_8_a D
  exact ⟨D', hsub, hiso⟩

end

open NeighborhoodSystem Domain.Recursive

theorem theorem_8_8_b {α : Type*} {D : NeighborhoodSystem α} (P :
    ComputablePresentation D) :
    ∃ (D' : NeighborhoodSystem ?) (P' : ComputablePresentation D') (h : D' ? U),
      (D ≅? D') ∧
        ComputableMap P' UComputablePresentation h.inj ∧
        ComputableMap UComputablePresentation P' h.proj :=
```

```
  ⟨DprimeUCode P, DprimeUCodePresentation P, DprimeUCode_subsystem P,
    isomorphic_DprimeUCode P, DprimeUCode_inj_isComputableMap P,
    DprimeUCode_proj_isComputableMap P⟩

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {V : NeighborhoodSystem α}

theorem fixedNbhd_isEffectivelyGiven {P : ComputablePresentation V} {a :
    ApproximableMap V V}
    (hcomp : ComputableMap P P a) : (fixedNbhd a).IsEffectivelyGiven := by
  obtain ⟨qChar, hqCharp, hqChar⟩ := diagFixed_exists_qChar hcomp
  obtain ⟨cons, hconsp, hconse⟩ := P.cons_computable
  have hcons : ∀ n m, cons (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m := by
    intro n m
    have h := hconse (Nat.pair n m)
    simp only [unpair_pair_fst, unpair_pair_snd] at h
    exact h.symm
  refine ⟨{
    X := D_X P qChar cons
    mem_X := D_X_mem hqChar hcons
    surj := fun hY => D_X_surj hqChar hcons hY
    interEq_computable := D_X_interEq_computable P qChar cons hqCharp hconsp
    cons_computable := D_X_cons_computable P qChar cons hqChar hcons hqCharp hconsp
    inter := D_inter
    inter_primrec := D_inter_primrec
    inter_spec := fun h => D_X_inter_spec hcons h
    masterIdx := 0
    masterIdx_spec := ?_ }⟩
  show D_X P qChar cons 0 = V.master
  show P.X (myFoldCode P qChar cons 0) = V.master
  rw [myFoldCode_eq, decodeList_zero, myFold_nil, P.masterIdx_spec]

theorem theorem_8_8_c {a : ApproximableMap U U} (_hfin : FinitaryProjection a)
    (hcomp : ComputableMap UComputablePresentation UComputablePresentation a) :
    (fixedNbhd a).IsEffectivelyGiven ∧ fixedNbhd a ? U :=
  ⟨fixedNbhd_isEffectivelyGiven hcomp, fixedNbhd_subsystem a⟩

end
open NeighborhoodSystem ApproximableMap Exercise326

theorem U_mem_nonempty : ∀ X, U.mem X → X.Nonempty := fun _ hX => hX.2.1

theorem funSpaceUU_isEffectivelyGiven : (funSpace U U).IsEffectivelyGiven :=
  funSpace_isEffectivelyGiven U_isEffectivelyGiven U_isEffectivelyGiven

noncomputable def funSpaceUUPresentation : ComputablePresentation (funSpace U U) :=
  funSpaceUU_isEffectivelyGiven.some

noncomputable def lamComb (a b : ApproximableMap U U) :
    ApproximableMap (funSpace U U) (funSpace U U) :=
  curry (b.comp ((evalMap U U).comp (prodMap (idMap (funSpace U U)) a)))

theorem prodUU_isEffectivelyGiven : (prod U U).IsEffectivelyGiven :=
  prod_isEffectivelyGiven U_isEffectivelyGiven U_isEffectivelyGiven
```

```
noncomputable def prodUUPresentation : ComputablePresentation (prod U U) :=
  prodUU_isEffectivelyGiven.some

theorem sumUU_isEffectivelyGiven :
    (sum U U U_mem_nonempty U_mem_nonempty).IsEffectivelyGiven :=
  sum_isEffectivelyGiven U_isEffectivelyGiven U_isEffectivelyGiven

noncomputable def sumUUPresentation : ComputablePresentation (sum U U U_mem_nonempty
    U_mem_nonempty) :=
  sumUU_isEffectivelyGiven.some

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)

theorem theorem_8_8_b_strong :
    ∃ (i : ApproximableMap D U) (j : ApproximableMap U D),
      j.comp i = idMap D ∧ i.comp j ≤ idMap U ∧
        ComputableMap P UComputablePresentation i ∧
        ComputableMap UComputablePresentation P j := by
  set h := DprimeUCode_subsystem P with hh
  refine ⟨h.inj.comp (isoInj P), (isoProj P).comp h.proj, ?_, ?_, ?_, ?_⟩
  · rw [comp_assoc, ← comp_assoc h.proj h.inj (isoInj P), h.proj_comp_inj, idMap_comp]
    exact isoProj_comp_isoInj P
  · have heq : (h.inj.comp (isoInj P)).comp ((isoProj P).comp h.proj) = h.inj.comp h.
    proj := by
      rw [comp_assoc, ← comp_assoc (isoInj P) (isoProj P) h.proj, isoInj_comp_isoProj,
     idMap_comp]
    rw [heq]
    exact h.inj_comp_proj_le
  · exact comp_isComputable (isoInj_isComputableMap P) (DprimeUCode_inj_isComputableMap
     P)
  · exact comp_isComputable (DprimeUCode_proj_isComputableMap P) (
    isoProj_isComputableMap P)

end

end DomainTheory.NeighbourhoodSystems
```

3.9.10 Definition 8.9 — constructs on projections

Definition_8_9.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_8
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section
```

```
namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap Exercise326

noncomputable def iArrow : ApproximableMap (funSpace U U) U :=
  (theorem_8_8_b_strong funSpaceUUPresentation).choose

noncomputable def iPlus : ApproximableMap (sum U U U_mem_nonempty U_mem_nonempty) U :=
  (theorem_8_8_b_strong sumUUPresentation).choose

noncomputable def iTimes : ApproximableMap (prod U U) U :=
  (theorem_8_8_b_strong prodUUPresentation).choose

noncomputable def jArrow : ApproximableMap U (funSpace U U) :=
  (theorem_8_8_b_strong funSpaceUUPresentation).choose_spec.choose

noncomputable def jPlus : ApproximableMap U (sum U U U_mem_nonempty U_mem_nonempty) :=
  (theorem_8_8_b_strong sumUUPresentation).choose_spec.choose

noncomputable def jTimes : ApproximableMap U (prod U U) :=
  (theorem_8_8_b_strong prodUUPresentation).choose_spec.choose

theorem iArrow_comp_jArrow_le : iArrow.comp jArrow ≤ idMap U :=
  (theorem_8_8_b_strong funSpaceUUPresentation).choose_spec.choose_spec.2.1

theorem iArrow_isComputableMap :
    ComputableMap funSpaceUUPresentation UComputablePresentation iArrow :=
  (theorem_8_8_b_strong funSpaceUUPresentation).choose_spec.choose_spec.2.2.1

theorem iPlus_comp_jPlus_le : iPlus.comp jPlus ≤ idMap U :=
  (theorem_8_8_b_strong sumUUPresentation).choose_spec.choose_spec.2.1

theorem iPlus_isComputableMap : ComputableMap sumUUPresentation
    UComputablePresentation iPlus :=
  (theorem_8_8_b_strong sumUUPresentation).choose_spec.choose_spec.2.2.1

theorem iTimes_comp_jTimes_le : iTimes.comp jTimes ≤ idMap U :=
  (theorem_8_8_b_strong prodUUPresentation).choose_spec.choose_spec.2.1

theorem iTimes_isComputableMap :
    ComputableMap prodUUPresentation UComputablePresentation iTimes :=
  (theorem_8_8_b_strong prodUUPresentation).choose_spec.choose_spec.2.2.1

theorem jArrow_comp_iArrow : jArrow.comp iArrow = idMap _ :=
  (theorem_8_8_b_strong funSpaceUUPresentation).choose_spec.choose_spec.1

theorem jArrow_isComputableMap :
    ComputableMap UComputablePresentation funSpaceUUPresentation jArrow :=
  (theorem_8_8_b_strong funSpaceUUPresentation).choose_spec.choose_spec.2.2.2

theorem jPlus_comp_iPlus : jPlus.comp iPlus = idMap _ :=
  (theorem_8_8_b_strong sumUUPresentation).choose_spec.choose_spec.1

theorem jPlus_isComputableMap : ComputableMap UComputablePresentation
    sumUUPresentation jPlus :=
  (theorem_8_8_b_strong sumUUPresentation).choose_spec.choose_spec.2.2.2
```

```
theorem jTimes_comp_iTimes : jTimes.comp iTimes = idMap _ :=
  (theorem_8_8_b_strong prodUUPresentation).choose_spec.choose_spec.1

theorem jTimes_isComputableMap :
    ComputableMap UComputablePresentation prodUUPresentation jTimes :=
  (theorem_8_8_b_strong prodUUPresentation).choose_spec.choose_spec.2.2.2

section
open NeighborhoodSystem ApproximableMap Exercise326
variable {α β : Type*} {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}

theorem inMap₀_toElementMap_reaches_left {? ?} {V₀ : NeighborhoodSystem ?} {V₁ :
    NeighborhoodSystem ?}
    {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty} (v : V₀.
    Element) :
    ∃ X, V₀.mem X ∧ ((inMap₀ (h₀ := h₀) (h₁ := h₁)).toElementMap v).mem (inj₀ X) := by
  refine ⟨V₀.master, V₀.master_mem, V₀.master, v.master_mem, V₀.master_mem, ?_,
    subset_rfl⟩
  exact Or.inr (Or.inl ⟨V₀.master, V₀.master_mem, rfl⟩)

theorem inMap₁_toElementMap_reaches_right {? ?} {V₀ : NeighborhoodSystem ?} {V₁ :
    NeighborhoodSystem ?}
    {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty} (v : V₁.
    Element) :
    ∃ Y, V₁.mem Y ∧ ((inMap₁ (h₀ := h₀) (h₁ := h₁)).toElementMap v).mem (inj₁ Y) := by
  refine ⟨V₁.master, V₁.master_mem, V₁.master, v.master_mem, V₁.master_mem, ?_,
    subset_rfl⟩
  exact Or.inr (Or.inr ⟨V₁.master, V₁.master_mem, rfl⟩)

theorem lamComb_eq (a b : ApproximableMap U U) :
    lamComb a b = curry (b.comp ((evalMap U U).comp (prodMap (idMap (funSpace U U)) a)
    )) := rfl

theorem not_sum_reaches_both {? ?} {V₀ : NeighborhoodSystem ?} {V₁ : NeighborhoodSystem
     ?}
    {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}
    {w : (sum V₀ V₁ h₀ h₁).Element} (hL : ∃ X, V₀.mem X ∧ w.mem (inj₀ X))
    (hR : ∃ Y, V₁.mem Y ∧ w.mem (inj₁ Y)) : False := by
  obtain ⟨X, _, hX⟩ := hL
  obtain ⟨Y, _, hY⟩ := hR
  have h := w.inter_mem hX hY
  rw [inj₀_inter_inj₁] at h
  exact not_sum_mem_empty (w.sub h)

theorem toApproxMap_toElementMap_lamComb (a b : ApproximableMap U U)
    (φ : (funSpace U U).Element) :
    toApproxMap ((lamComb a b).toElementMap φ) = b.comp ((toApproxMap φ).comp a) := by
  apply ext_of_toElementMap
  intro z
  rw [lamComb_eq, toElementMap_curry_apply, toElementMap_comp, toElementMap_comp,
    toElementMap_prodMap_pair, toElementMap_idMap, evalMap_apply, toElementMap_comp,
    toElementMap_comp]

theorem isRetraction_lamComb {a b : ApproximableMap U U} (ha : Retraction a)
    (hb : Retraction b) : Retraction (lamComb a b) := by
  constructor
```

```
  apply ext_of_toElementMap
  intro φ
  apply (funSpaceEquiv U U).injective
  rw [funSpaceEquiv_apply, funSpaceEquiv_apply, toElementMap_comp,
    toApproxMap_toElementMap_lamComb a b ((lamComb a b).toElementMap φ),
    toApproxMap_toElementMap_lamComb a b φ,
    comp_assoc b ((toApproxMap φ).comp a) a,
    ← comp_assoc b b (((toApproxMap φ).comp a).comp a), hb.out,
    comp_assoc (toApproxMap φ) a a, ha.out]

theorem le_idMap_lamComb {a b : ApproximableMap U U} (ha : a ≤ idMap U) (hb : b ≤
    idMap U) :
    lamComb a b ≤ idMap (funSpace U U) := by
  rw [le_iff_toElementMap_le]
  intro φ
  rw [toElementMap_idMap, ← (funSpaceEquiv U U).le_iff_le, funSpaceEquiv_apply,
    funSpaceEquiv_apply, toApproxMap_toElementMap_lamComb]
  calc b.comp ((toApproxMap φ).comp a) ≤ (idMap U).comp ((toApproxMap φ).comp (idMap U
    )) :=
        comp_mono_gen hb (comp_mono_gen le_rfl ha)
    _ = toApproxMap φ := by rw [comp_idMap, idMap_comp]

theorem toElementMap_idem_of_isRetraction {a : ApproximableMap E E} (ha : Retraction a
    )
    (x : E.Element) : a.toElementMap (a.toElementMap x) = a.toElementMap x := by
  rw [← toElementMap_comp, ha.out]

theorem toElementMap_le_of_comp_le_idMap {i : ApproximableMap D E} {j :
    ApproximableMap E D}
    (hij : i.comp j ≤ idMap E) (x : E.Element) : i.toElementMap (j.toElementMap x) ≤ x
     := by
  have h := (le_iff_toElementMap_le.mp hij) x
  rwa [toElementMap_comp, toElementMap_idMap] at h

theorem toElementMap_le_self_of_le_idMap {a : ApproximableMap E E} (ha : a ≤ idMap E)
    (x : E.Element) : a.toElementMap x ≤ x := by
  have h := (le_iff_toElementMap_le.mp ha) x
  rwa [toElementMap_idMap] at h

theorem toElementMap_of_comp_eq_idMap {i : ApproximableMap D E} {j : ApproximableMap E
     D}
    (hji : j.comp i = idMap D) (v : D.Element) : j.toElementMap (i.toElementMap v) = v
     := by
  rw [← toElementMap_comp, hji, toElementMap_idMap]

end
end DomainTheory.NeighbourhoodSystems
```

DEFINITION 8.9. Let the computable projection pairs $i_+ : \mathcal{U}+\mathcal{U} \to \mathcal{U}$ and $j_+ : \mathcal{U} \to \mathcal{U}+\mathcal{U}$ be fixed. Similarly choose $i_\times, j_\times$ and $i_\to, j_\to$ for $\mathcal{U}\times\mathcal{U}$ and $\mathcal{U}\to\mathcal{U}$. Define:

$$a + b = \mathrm{cond} \circ \langle \mathrm{which}, i_+ \circ \mathrm{in}_0 \circ a \circ \mathrm{out}_0, i_+ \circ \mathrm{in}_1 \circ b \circ \mathrm{out}_1 \rangle \circ j_+ \; ;$$

$$a \times b = i_\times \circ \langle a \circ \mathrm{proj}_0, b \circ \mathrm{proj}_1 \rangle \circ j_\times \; ;$$

$$a \to b = i_{\to} \circ (\lambda f.\, b \circ f \circ a) \circ j_{\to}\ ,$$

for all $a, b : \mathcal{U} \to \mathcal{U}$. □

These interesting(computable!) combinators on elements of $\mathcal{U} \to \mathcal{U}$ have many, many properties. We shall, however, only see what they do to projections.

— embeddings and `lamComb`
— `sumComb` and Pref-folded companions
— `prodComb` and Pref-folded companions
— `arrowComb` and Pref-folded companions
— `expMap` and Pref-folded companions

3.9.11 Proposition 8.10 — constructs preserve projections

`Proposition_8_10.lean`

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_9
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.sumComb
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.prodComb
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.arrowComb
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.sumMap
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.expMap

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap Exercise326
universe u
variable {α β : Type u} {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}

theorem isProjection_combinators {a b : ApproximableMap U U}
    (ha : IsProjection a) (hb : IsProjection b) :
    IsProjection (sumComb a b) ∧ IsProjection (prodComb a b) ∧ IsProjection (arrowComb
     a b) :=
  ⟨sumComb.isProjection ha hb, prodComb.isProjection ha hb, arrowComb.isProjection ha
    hb⟩

def elementIsoOfProjectionPair (i : ApproximableMap D E) (j : ApproximableMap E D)
    (hji : j.comp i = idMap D) {g : ApproximableMap E E} (hg : g = i.comp j) :
    D.Element ≃o {y : E.Element // g.toElementMap y = y} where
  toFun x := ⟨i.toElementMap x, by
    have h1 : j.toElementMap (i.toElementMap x) = (j.comp i).toElementMap x :=
      (toElementMap_comp j i x).symm
    rw [hg, toElementMap_comp, h1, hji, toElementMap_idMap]⟩
  invFun y := j.toElementMap y.1
```

```
  left_inv x := by
    have h1 : j.toElementMap (i.toElementMap x) = (j.comp i).toElementMap x :=
      (toElementMap_comp j i x).symm
    show j.toElementMap (i.toElementMap x) = x
    rw [h1, hji, toElementMap_idMap]
  right_inv y := by
    apply Subtype.ext
    have hfix : g.toElementMap y.1 = y.1 := y.2
    show i.toElementMap (j.toElementMap y.1) = y.1
    rw [← toElementMap_comp, ← hg]
    exact hfix
  map_rel_iff' := by
    intro x x'
    show i.toElementMap x ≤ i.toElementMap x' ↔ x ≤ x'
    constructor
    · intro hle
      have hmono := j.toElementMap_mono hle
      have h1 : j.toElementMap (i.toElementMap x) = (j.comp i).toElementMap x :=
        (toElementMap_comp j i x).symm
      have h2 : j.toElementMap (i.toElementMap x') = (j.comp i).toElementMap x' :=
        (toElementMap_comp j i x').symm
      rw [h1, h2, hji, toElementMap_idMap, toElementMap_idMap] at hmono
      exact hmono
    · intro hle
      exact i.toElementMap_mono hle

theorem inj_comp_proj_eq_self {a : ApproximableMap U U} (ha : FinitaryProjection a) :
    (fixedNbhd_subsystem a).inj.comp (fixedNbhd_subsystem a).proj = a :=
  sub_eq_self_of_isFinitaryProjection ha

theorem toElementMap_bot_eq_bot_of_comp_le_idMap {i : ApproximableMap D E} {j :
    ApproximableMap E D}
    (hij : i.comp j ≤ idMap E) : i.toElementMap D.bot = E.bot := by
  apply le_antisymm
  · calc i.toElementMap D.bot ≤ i.toElementMap (j.toElementMap E.bot) :=
          i.toElementMap_mono (D.bot_le _)
      _ ≤ E.bot := toElementMap_le_of_comp_le_idMap hij E.bot
  · exact E.bot_le _

theorem isFinitary_of_projectionPair (i : ApproximableMap D E) (j : ApproximableMap E
    D)
    (hji : j.comp i = idMap D) {g : ApproximableMap E E} (hg : g = i.comp j) :
    IsFinitary g :=
  ⟨α, D, ⟨(elementIsoOfProjectionPair i j hji hg).symm⟩⟩

namespace prodComb

theorem I_comp_J (a b : ApproximableMap U U) (ha : FinitaryProjection a) (hb :
    FinitaryProjection b) :
    (prodComb.I a b).comp (prodComb.J a b) = prodComb a b := by
  unfold I J
  rw [comp_assoc, ← comp_assoc (prodMap _ _) (prodMap _ _) jTimes, ← prodMap_comp,
    inj_comp_proj_eq_self ha, inj_comp_proj_eq_self hb, ← comp_assoc, prodComb.eq,
    comp_assoc]

noncomputable def elementIso (a b : ApproximableMap U U)
```

```
    (ha : FinitaryProjection a) (hb : FinitaryProjection b) :
    (prod (fixedNbhd a) (fixedNbhd b)).Element ≃o
      {y : U.Element // (prodComb a b).toElementMap y = y} :=
  elementIsoOfProjectionPair (prodComb.I a b) (prodComb.J a b) (prodComb.J_comp_I a b)
    (prodComb.I_comp_J a b ha hb).symm

theorem finitary (a b : ApproximableMap U U) (ha : FinitaryProjection a) (hb :
    FinitaryProjection b) :
    IsFinitary (prodComb a b) :=
  isFinitary_of_projectionPair (prodComb.I a b) (prodComb.J a b) (prodComb.J_comp_I a
    b)
    (prodComb.I_comp_J a b ha hb).symm

theorem finitaryProjection (a b : ApproximableMap U U)
    (ha : FinitaryProjection a) (hb : FinitaryProjection b) :
    FinitaryProjection (prodComb a b) :=
  ⟨⟨prodComb.isProjection ha.out.1 hb.out.1, prodComb.finitary a b ha hb⟩⟩

end prodComb

namespace arrowComb

theorem I_comp_J (a b : ApproximableMap U U) (ha : FinitaryProjection a) (hb :
    FinitaryProjection b) :
    (arrowComb.I a b).comp (arrowComb.J a b) = arrowComb a b := by
  unfold I J
  rw [comp_assoc, ← comp_assoc (expMap _ _) (expMap _ _) jArrow, ← expMap.comp,
    inj_comp_proj_eq_self ha, inj_comp_proj_eq_self hb, expMap.eq_lamComb, ←
    comp_assoc,
    arrowComb.eq, comp_assoc]

noncomputable def elementIso (a b : ApproximableMap U U)
    (ha : FinitaryProjection a) (hb : FinitaryProjection b) :
    (funSpace (fixedNbhd a) (fixedNbhd b)).Element ≃o
      {y : U.Element // (arrowComb a b).toElementMap y = y} :=
  elementIsoOfProjectionPair (arrowComb.I a b) (arrowComb.J a b) (arrowComb.J_comp_I a
    b)
    (arrowComb.I_comp_J a b ha hb).symm

theorem finitary (a b : ApproximableMap U U) (ha : FinitaryProjection a) (hb :
    FinitaryProjection b) :
    IsFinitary (arrowComb a b) :=
  isFinitary_of_projectionPair (arrowComb.I a b) (arrowComb.J a b) (arrowComb.J_comp_I
    a b)
    (arrowComb.I_comp_J a b ha hb).symm

theorem finitaryProjection (a b : ApproximableMap U U)
    (ha : FinitaryProjection a) (hb : FinitaryProjection b) :
    FinitaryProjection (arrowComb a b) :=
  ⟨⟨arrowComb.isProjection ha.out.1 hb.out.1, arrowComb.finitary a b ha hb⟩⟩

end arrowComb

namespace sumComb

theorem eq_iPlus_sumMap_jPlus (a b : ApproximableMap U U) :
```

```
    sumComb a b = iPlus.comp
      ((sumMap (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty) (h₀' := U_mem_nonempty)
          (h₁' := U_mem_nonempty) a b).comp jPlus) := by
  apply ext_of_toElementMap
  intro x
  rw [toElementMap_comp, toElementMap_comp]
  rcases sum_element_trichotomy (jPlus.toElementMap x) with hL | hR | hN
  · rw [sumComb.toElementMap_of_left hL, sumMap.toElementMap_of_left hL]
  · rw [sumComb.toElementMap_of_right hR, sumMap.toElementMap_of_right hR]
  · rw [sumComb.toElementMap_of_neither hN, sumMap.reaches_neither_iff_eq_bot.mp hN,
    sumMap.bot,
      toElementMap_bot_eq_bot_of_comp_le_idMap iPlus_comp_jPlus_le]

theorem I_comp_J (a b : ApproximableMap U U) (ha : FinitaryProjection a) (hb :
    FinitaryProjection b) :
    (sumComb.I a b).comp (sumComb.J a b) = sumComb a b := by
  unfold I J
  rw [comp_assoc, ← comp_assoc (sumMap _ _) (sumMap _ _) jPlus, ← sumMap.comp,
    inj_comp_proj_eq_self ha, inj_comp_proj_eq_self hb, ← comp_assoc,
    eq_iPlus_sumMap_jPlus, comp_assoc]

theorem J_comp_I (a b : ApproximableMap U U) :
    (sumComb.J a b).comp (sumComb.I a b) =
      idMap (sum (fixedNbhd a) (fixedNbhd b) (fixedNbhd_mem_nonempty a)
        (fixedNbhd_mem_nonempty b)) := by
  unfold J I
  rw [comp_assoc, ← comp_assoc jPlus iPlus (sumMap _ _), jPlus_comp_iPlus, idMap_comp,
    ← sumMap.comp, (fixedNbhd_subsystem a).proj_comp_inj, (fixedNbhd_subsystem b).
    proj_comp_inj,
    sumMap.id]

noncomputable def elementIso (a b : ApproximableMap U U)
    (ha : FinitaryProjection a) (hb : FinitaryProjection b) :
    (sum (fixedNbhd a) (fixedNbhd b) (fixedNbhd_mem_nonempty a) (
    fixedNbhd_mem_nonempty b)).Element
      ≃o {y : U.Element // (sumComb a b).toElementMap y = y} :=
  elementIsoOfProjectionPair (sumComb.I a b) (sumComb.J a b) (sumComb.J_comp_I a b)
    (sumComb.I_comp_J a b ha hb).symm

theorem finitary (a b : ApproximableMap U U) (ha : FinitaryProjection a) (hb :
    FinitaryProjection b) :
    IsFinitary (sumComb a b) :=
  isFinitary_of_projectionPair (sumComb.I a b) (sumComb.J a b) (sumComb.J_comp_I a b)
    (sumComb.I_comp_J a b ha hb).symm

theorem finitaryProjection (a b : ApproximableMap U U)
    (ha : FinitaryProjection a) (hb : FinitaryProjection b) :
    FinitaryProjection (sumComb a b) :=
  ⟨⟨sumComb.isProjection ha.out.1 hb.out.1, sumComb.finitary a b ha hb⟩⟩

end sumComb

theorem finitaryProjection_combinators {a b : ApproximableMap U U}
    (ha : FinitaryProjection a) (hb : FinitaryProjection b) :
    FinitaryProjection (sumComb a b) ∧ FinitaryProjection (prodComb a b) ∧
      FinitaryProjection (arrowComb a b) :=
```

```
  ⟨sumComb.finitaryProjection a b ha hb, prodComb.finitaryProjection a b ha hb,
    arrowComb.finitaryProjection a b ha hb⟩

theorem proposition_8_10 {a b : ApproximableMap U U}
    (ha : FinitaryProjection a) (hb : FinitaryProjection b) :
    FinitaryProjection (sumComb a b) ∧ FinitaryProjection (prodComb a b) ∧
      FinitaryProjection (arrowComb a b) ∧
      Nonempty
        ((sum (fixedNbhd a) (fixedNbhd b) (fixedNbhd_mem_nonempty a)
            (fixedNbhd_mem_nonempty b)).Element ≃o
          {y : U.Element // (sumComb a b).toElementMap y = y}) ∧
      Nonempty
        ((prod (fixedNbhd a) (fixedNbhd b)).Element ≃o
          {y : U.Element // (prodComb a b).toElementMap y = y}) ∧
      Nonempty
        ((funSpace (fixedNbhd a) (fixedNbhd b)).Element ≃o
          {y : U.Element // (arrowComb a b).toElementMap y = y}) :=
  ⟨sumComb.finitaryProjection a b ha hb, prodComb.finitaryProjection a b ha hb,
    arrowComb.finitaryProjection a b ha hb, ⟨sumComb.elementIso a b ha hb⟩,
    ⟨prodComb.elementIso a b ha hb⟩, ⟨arrowComb.elementIso a b ha hb⟩⟩

end DomainTheory.NeighbourhoodSystems
```

PROPOSITION 8.10. If $a, b : \mathcal{U} \to \mathcal{U}$ are projections, then so are $a + b$, $a \times b$, and $a \to b$. If a and b are finitary, then so are the others; for the fixed-point set of each of them is isomorphic to the corresponding construct applied to the domains determined by a and b.

Proof: Suppose that $a, b \sqsubseteq I_{\mathcal{U}}$ (= I for short). Then

$$a + b \sqsubseteq I + I = i_+ \circ j_+ \sqsubseteq I.$$

The other cases are similar.

Suppose $a = a \circ a$ and $b = b \circ b$, then, for example,

$$\begin{aligned}(a \times b) \circ (a \times b) &= i_\times \circ \langle a \circ \mathrm{proj}_0,\ b \circ \mathrm{proj}_1 \rangle \circ \langle a \circ \mathrm{proj}_0,\ b \circ \mathrm{proj}_1 \rangle \circ j_\times \\ &= i_\times \circ \langle a \circ a \circ \mathrm{proj}_0,\ b \circ b \circ \mathrm{proj}_1 \rangle \circ j_\times \\ &= a \times b.\end{aligned}$$

The other cases are similar.

Now in case the fixed-point sets of a and b are domains, they are respectively isomorphic to

$$D_a = \{X \in \mathcal{U} \mid X\ a\ X\} \quad \text{and}$$
$$D_b = \{Y \in \mathcal{U} \mid Y\ b\ Y\}.$$

We have to show, for example, that

$$D_a \to D_b \cong D_{a \to b}.$$

Now to simplify matters, remark that the fixed-point set of $a \to b$ on $\mathcal{U}$ is isomorphic to the fixed-point set of $\lambda f.\ b \circ f \circ a$ on $(\mathcal{U} \to \mathcal{U})$. (Hint: use $i_\to$ and $j_\to$ to set up the isomorphism.) So we have to think what it is for an $f : \mathcal{U} \to \mathcal{U}$ to satisfy

$$f = b \circ f \circ a.$$

Notice that we might as well say that $a : \mathcal{U} \to D_a$ and that this map is the other half of an obvious projection pair where

$$i_a : D_a \to \mathcal{U},$$

and $i_a \circ a = a$ and $a \circ i_a = i_a$. So if $g : D_a \to D_b$, let

$$f = i_b \circ g \circ a;$$

then $b \circ f \circ a = f$. Conversely, if f is like this, then let

$$g = b \circ f \circ i_a.$$

Thus, $i_b \circ g \circ a = b \circ f \circ a = f$; so there is an order-preserving isomorphism between the $g : D_a \to D_b$ and the $f = b \circ f \circ a$.

The isomorphism proofs for $+$ and $\times$ are similar. $\square$

Well, this was a lot of work, but the pay-off is rather handsome. What we have done is transpose all the

$$D_a \triangleleft U$$

over to finitary projections $a : U \to U$. This transposition is an isomorphism, because

$$D_a \triangleleft D_b \text{ iff } a \sqsubseteq b.$$

Moreover, by the method of 8.9 and 8.10, all our favourite constructs have been made into *combinators*, that is, approximable — even computable — maps on the domain of finitary projections. *ALL APPROXIMABLE (COMPUTABLE) MAPS HAVE (COMPUTABLE) FIXED POINTS.* And there you are! The standard fixed-point method is available to obtain computable (i.e. effectively given) solutions to *all* domain equations (even sets of equations) where the constructs can be reworked in *this* way to be defined on projections. Examples are suggested in the exercises.

Another pay-off concerns the λ-calculus itself. Inasmuch as

$$U + U, \quad U \times U, \quad U \to U \triangleleft U,$$

we might just as well forget the outside world and regard all these useful domains as being part of U. For example, on the left we have the new notation and on the right the old notation:

$$\begin{aligned}
\mathrm{which}(z) &= \mathrm{which}(j_+(z)); \\
\mathrm{in}_i(x) &= i_+(\mathrm{in}_i(x)), \quad i = 0, 1; \\
\mathrm{out}_i(x) &= \mathrm{out}_i(j_+(x)), \quad i = 0, 1; \\
\langle x, y \rangle &= i_\times(\langle x, y \rangle); \\
\mathrm{proj}_i(z) &= \mathrm{proj}_i(j_\times(z)), \quad i = 0, 1; \\
u(x) &= j_\to(u)(x); \\
\lambda x.\, \tau &\cong i_\to(\lambda x.\, \tau).
\end{aligned}$$

And, there is no reason to stop here. The system

$$T \cong \{\{0, 1/2\}, \{1/2, 1\}, \{0, 1\}\} \triangleleft U,$$

so we might as well think of

$$\text{true, false} \in |U|$$

and think of $\mathrm{cond} : U \times U \times U \to U$. No! that is wrong: under the new regime *EVERYTHING IS AN ELEMENT OF U*. With the new meaning of λ, all functions, all pairs, all combinators, all constructs become elements of U.

It takes a little time to get used to "universal conscription" with all elements doing (at least) double duty in the same domain, but there are many advantages, both notational and conceptual.

3.9.12 Lecture VIII exercises

EXERCISES

3.9.13 Exercise 8.11 — retraction on intervals

Let $\mathbb{Q}$ be the set of rational numbers and define a neighbourhood system by the equation

$$R = \{[0, r) \mid r \in \mathbb{Q} \text{ and } 0 < r \leq 1\}.$$

Show that the following defines an approximable map $a : R \to R$:

$$[0, r)\ a\ [0, s) \quad \text{iff} \quad r < s \text{ or } r = s = 1.$$

Show in addition that a is a projection where the fixed-point set of a is in a one-one correspondence with the *real* numbers between 0 and 1 inclusive. (Hint: Recall Dedekind cuts and show $\subseteq$ matches $\leq$.) Conclude that a is *NOT* finitary. (Hint: Aside from $\perp$ there are no finite elements for $\{x \mid x = a(x)\}$.)

Tip summary The tip records that Scott's map `a` on `R` is a projection and is not finitary.

Development Builds the Dedekind-cut system `R` and proves the projection `a` is not finitary.

DedekindCutProjection.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Examples_8_4
public import Mathlib.Algebra.BigOperators.Group.Finset.Defs
public import Mathlib.Algebra.Order.Archimedean.Real.Basic

public import Mathlib.Combinatorics.Colex

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems.Exercise811

open NeighborhoodSystem ApproximableMap
```

```
def R : NeighborhoodSystem ? :=
  NeighborhoodSystem.ofNestedOrDisjoint
    (mem := fun X => ∃ r : ?, 0 < r ∧ r ≤ 1 ∧ X = Set.Ico (0 : ?) r)
    (master := Set.Ico (0 : ?) 1)
    (master_nonempty := ⟨0, by norm_num⟩)
    (master_mem := ⟨1, one_pos, le_refl 1, rfl⟩)
    (hnd := by
      rintro X Y ⟨r, hr0, hr1, rfl⟩ ⟨s, hs0, hs1, rfl⟩
      rcases le_total r s with h | h
      · exact Or.inl (Set.Ico_subset_Ico le_rfl h)
      · exact Or.inr (Or.inl (Set.Ico_subset_Ico le_rfl h)))
    (sub_master := by
      rintro X ⟨r, hr0, hr1, rfl⟩
      exact Set.Ico_subset_Ico le_rfl hr1)

@[simp] theorem R_mem_iff {X : Set ?} :
    R.mem X ↔ ∃ r : ?, 0 < r ∧ r ≤ 1 ∧ X = Set.Ico (0 : ?) r := Iff.rfl

@[simp] theorem R_master : R.master = Set.Ico (0 : ?) 1 := rfl

theorem Ico0_inj {r s : ?} (hr : 0 < r) (hs : 0 < s)
    (h : Set.Ico (0 : ?) r = Set.Ico (0 : ?) s) : r = s := by
  rcases lt_trichotomy r s with hlt | heq | hgt
  · have hmem : r ∈ Set.Ico (0 : ?) s := ⟨hr.le, hlt⟩
    rw [← h] at hmem
    exact absurd hmem.2 (lt_irrefl r)
  · exact heq
  · have hmem : s ∈ Set.Ico (0 : ?) r := ⟨hs.le, hgt⟩
    rw [h] at hmem
    exact absurd hmem.2 (lt_irrefl s)

theorem Ico0_inter (r s : ?) :
    Set.Ico (0 : ?) r ∩ Set.Ico (0 : ?) s = Set.Ico (0 : ?) (min r s) := by
  rw [Set.Ico_inter_Ico, sup_idem]

theorem Ico0_le_of_subset {p q : ?} (hp : 0 < p)
    (hsub : Set.Ico (0 : ?) p ⊆ Set.Ico (0 : ?) q) : p ≤ q := by
  have hq : (0 : ?) < q := (hsub ⟨le_refl 0, hp⟩).2
  by_contra hlt
  rw [not_le] at hlt
  exact absurd (hsub ⟨hq.le, hlt⟩).2 (lt_irrefl q)

def aRel (X Y : Set ?) : Prop :=
  ∃ r s : ?, 0 < r ∧ r ≤ 1 ∧ 0 < s ∧ s ≤ 1 ∧
    X = Set.Ico (0 : ?) r ∧ Y = Set.Ico (0 : ?) s ∧ (r < s ∨ (r = 1 ∧ s = 1))

theorem aRel_combine {r s s' : ?} (hs1 : s ≤ 1) (hs1' : s' ≤ 1)
    (h1 : r < s ∨ (r = 1 ∧ s = 1)) (h2 : r < s' ∨ (r = 1 ∧ s' = 1)) :
    r < min s s' ∨ (r = 1 ∧ min s s' = 1) := by
  rcases h1 with h1 | ⟨rfl, rfl⟩
  · rcases h2 with h2 | ⟨rfl, rfl⟩
    · exact Or.inl (lt_min h1 h2)
    · exact absurd (h1.trans_le hs1) (lt_irrefl _)
  · rcases h2 with h2 | ⟨-, rfl⟩
    · exact absurd (h2.trans_le hs1') (lt_irrefl _)
    · exact Or.inr ⟨rfl, min_self 1⟩
```

```
def a : ApproximableMap R R where
  rel := aRel
  rel_dom := fun ⟨r, _, hr0, hr1, _, _, hXr, _, _⟩ => ⟨r, hr0, hr1, hXr⟩
  rel_cod := fun ⟨_, s, _, _, hs0, hs1, _, hYs, _⟩ => ⟨s, hs0, hs1, hYs⟩
  master_rel := ⟨1, 1, one_pos, le_rfl, one_pos, le_rfl, rfl, rfl, Or.inr ⟨rfl, rfl⟩⟩
  inter_right := by
    rintro X Y Y' ⟨r, s, hr0, hr1, hs0, hs1, rfl, rfl, hcond⟩
      ⟨r', s', hr0', hr1', hs0', hs1', hXr', rfl, hcond'⟩
    have hrr' : r = r' := Ico0_inj hr0 hr0' hXr'
    subst hrr'
    rw [Set.Ico_inter_Ico, sup_idem]
    exact ⟨r, min s s', hr0, hr1, lt_min hs0 hs0', (min_le_left s s').trans hs1, rfl,
    rfl,
      aRel_combine hs1 hs1' hcond hcond'⟩
  mono := by
    rintro X X' Y Y' ⟨r, s, hr0, hr1, hs0, hs1, rfl, rfl, hcond⟩ hX'X hYY'
      ⟨r', hr0', hr1', rfl⟩ ⟨s', hs0', hs1', rfl⟩
    have hr'r : r' ≤ r := Ico0_le_of_subset hr0' hX'X
    have hss' : s ≤ s' := Ico0_le_of_subset hs0 hYY'
    refine ⟨r', s', hr0', hr1', hs0', hs1', rfl, rfl, ?_⟩
    rcases hcond with hlt | ⟨rfl, rfl⟩
    · exact Or.inl (hr'r.trans_lt (hlt.trans_le hss'))
    · rcases hr1'.lt_or_eq with h | h
      · exact Or.inl (h.trans_le hss')
      · exact Or.inr ⟨h, le_antisymm hs1' hss'⟩

theorem aRel_iff {r s : ?} (hr0 : 0 < r) (hr1 : r ≤ 1) (hs0 : 0 < s) (hs1 : s ≤ 1) :
    aRel (Set.Ico (0 : ?) r) (Set.Ico (0 : ?) s) ↔ (r < s ∨ (r = 1 ∧ s = 1)) := by
  constructor
  · rintro ⟨r', s', hr0', hr1', hs0', hs1', hXr, hXs, hcond⟩
    rw [Ico0_inj hr0 hr0' hXr, Ico0_inj hs0 hs0' hXs]
    exact hcond
  · intro h
    exact ⟨r, s, hr0, hr1, hs0, hs1, rfl, rfl, h⟩

@[simp] theorem a_rel {X Y : Set ?} : a.rel X Y ↔ aRel X Y := Iff.rfl

theorem Element.ext_U {x y : R.Element} (h : ∀ r : ?, x.mem (Set.Ico 0 r) ↔ y.mem (Set
    .Ico 0 r)) :
    x = y := by
  apply NeighborhoodSystem.Element.ext
  intro X
  constructor
  · intro hx
    obtain ⟨r, _, _, rfl⟩ := x.sub hx
    exact (h r).mp hx
  · intro hy
    obtain ⟨r, _, _, rfl⟩ := y.sub hy
    exact (h r).mpr hy

def mkElement (U : ? → Prop) (hU1 : U 1) (hUpos : ∀ r, U r → 0 < r) (hUle1 : ∀ r, U r
     → r ≤ 1)
    (hUup : ∀ r s, U r → r ≤ s → s ≤ 1 → U s) : R.Element where
  mem X := ∃ r, U r ∧ X = Set.Ico (0 : ?) r
  sub := fun ⟨r, hr, hXr⟩ => ⟨r, hUpos r hr, hUle1 r hr, hXr⟩
```

```
  master_mem := ⟨1, hU1, rfl⟩
  inter_mem := by
    rintro X Y ⟨r, hr, rfl⟩ ⟨s, hs, rfl⟩
    rw [Ico0_inter]
    rcases le_total r s with h | h
    · exact ⟨r, hr, by rw [min_eq_left h]⟩
    · exact ⟨s, hs, by rw [min_eq_right h]⟩
  up_mem := by
    rintro X Y ⟨r, hr, rfl⟩ hY hsub
    obtain ⟨s, hs0, hs1, rfl⟩ := hY
    exact ⟨s, hUup r s hr (Ico0_le_of_subset (hUpos r hr) hsub) hs1, rfl⟩

@[simp] theorem mkElement_mem {U hU1 hUpos hUle1 hUup} {X : Set ?} :
    (mkElement U hU1 hUpos hUle1 hUup).mem X ↔ ∃ r, U r ∧ X = Set.Ico (0 : ?) r := Iff
    .rfl

theorem R_mem_Ico0 {s : ?} (h : R.mem (Set.Ico (0 : ?) s)) : 0 < s ∧ s ≤ 1 := by
  obtain ⟨r, hr0, hr1, heq⟩ := h
  have hsne : (Set.Ico (0 : ?) s).Nonempty := heq ▸ ⟨0, le_refl 0, hr0⟩
  obtain ⟨x, hx0, hxs⟩ := hsne
  have hs0 : 0 < s := lt_of_le_of_lt hx0 hxs
  have hsr : s = r := Ico0_inj hs0 hr0 heq
  exact ⟨hs0, hsr ▸ hr1⟩

def cutU (t : ?) (r : ?) : Prop := r ≤ 1 ∧ ((1 - t : ?) < (r : ?) ∨ r = 1)

theorem cutU_le1 {t : ?} {r : ?} (h : cutU t r) : r ≤ 1 := h.1

theorem cutU_one {t : ?} : cutU t 1 := ⟨le_rfl, Or.inr rfl⟩

theorem cutU_pos {t : ?} (ht1 : t ≤ 1) {r : ?} (h : cutU t r) : 0 < r := by
  rcases h.2 with h2 | rfl
  · have hc : (0 : ?) ≤ 1 - t := by linarith
    exact_mod_cast lt_of_le_of_lt hc h2
  · norm_num

theorem cutU_up {r s : ?} {t : ?} (h : cutU t r) (hrs : r ≤ s) (hs1 : s ≤ 1) : cutU t
    s := by
  refine ⟨hs1, ?_⟩
  rcases h.2 with h2 | rfl
  · left
    have hcast : (r : ?) ≤ (s : ?) := by exact_mod_cast hrs
    linarith
  · exact Or.inr (le_antisymm hs1 hrs)

def cutElt (t : ?) (ht1 : t ≤ 1) : R.Element :=
  mkElement (cutU t) cutU_one (fun _ h => cutU_pos ht1 h) (fun _ h => cutU_le1 h)
    (fun _ _ h hrs hs1 => cutU_up h hrs hs1)

@[simp] theorem cutElt_mem {t : ?} {ht1 : t ≤ 1} {r : ?} :
    (cutElt t ht1).mem (Set.Ico 0 r) ↔ cutU t r := by
  simp only [cutElt, mkElement_mem]
  constructor
  · rintro ⟨r', hr', heq⟩
    have hr'0 := cutU_pos ht1 hr'
    have hne : (Set.Ico (0 : ?) r).Nonempty := heq ▸ ⟨0, le_refl 0, hr'0⟩
```

```
    obtain ⟨x, hx0, hxr⟩ := hne
    have hr0 : 0 < r := lt_of_le_of_lt hx0 hxr
    rwa [Ico0_inj hr0 hr'0 heq]
  · exact fun h => ⟨r, h, rfl⟩

def cutS (x : R.Element) : Set ? := (fun r : ? => (r : ?)) '' {r | x.mem (Set.Ico 0 r)
    }

noncomputable def cutPoint (x : R.Element) : ? := 1 - sInf (cutS x)

theorem cutS_bddBelow (x : R.Element) : BddBelow (cutS x) := by
  refine ⟨0, ?_⟩
  rintro y ⟨r, hr, rfl⟩
  dsimp only
  exact_mod_cast (R_mem_Ico0 (x.sub hr)).1.le

theorem cutPoint_nonneg (x : R.Element) : 0 ≤ cutPoint x := by
  have hmem1 : x.mem (Set.Ico (0 : ?) 1) := by rw [← R_master]; exact x.master_mem
  have hc1 : sInf (cutS x) ≤ 1 := csInf_le (cutS_bddBelow x) ⟨1, hmem1, by norm_num⟩
  unfold cutPoint; linarith

theorem cutS_nonempty (x : R.Element) : (cutS x).Nonempty :=
  ⟨1, 1, show x.mem (Set.Ico (0 : ?) 1) by rw [← R_master]; exact x.master_mem, by
    norm_num⟩

theorem cutPoint_le_one (x : R.Element) : cutPoint x ≤ 1 := by
  have hc0 : (0:?) ≤ sInf (cutS x) := le_csInf (cutS_nonempty x)
    (by rintro y ⟨r, hr, rfl⟩; dsimp only; exact_mod_cast (R_mem_Ico0 (x.sub hr)).1.le)
  unfold cutPoint; linarith

theorem cutElt_cutPoint {x : R.Element} (hfix : a.toElementMap x = x) :
    cutElt (cutPoint x) (cutPoint_le_one x) = x := by
  have hSne := cutS_nonempty x
  have hSbdd := cutS_bddBelow x
  apply Element.ext_U
  intro r
  rw [cutElt_mem]
  have hcU : cutU (cutPoint x) r ↔ (r ≤ 1 ∧ (sInf (cutS x) < (r : ?) ∨ r = 1)) := by
    unfold cutPoint
    constructor
    · rintro ⟨h1, h2 | h2⟩
      · exact ⟨h1, Or.inl (by linarith)⟩
      · exact ⟨h1, Or.inr h2⟩
    · rintro ⟨h1, h2 | h2⟩
      · exact ⟨h1, Or.inl (by linarith)⟩
      · exact ⟨h1, Or.inr h2⟩
  rw [hcU, Iff.comm]
  have hopen : ∀ Y, x.mem Y ↔ ∃ X, x.mem X ∧ a.rel X Y := by
    intro Y
    conv_lhs => rw [← hfix]
    exact mem_toElementMap a x
  constructor
  · intro hxr
    refine ⟨(R_mem_Ico0 (x.sub hxr)).2, ?_⟩
    by_cases hr1 : r = 1
    · exact Or.inr hr1
```

```
    · refine Or.inl ?_
      obtain ⟨X, hXmem, hrel⟩ := (hopen (Set.Ico 0 r)).mp hxr
      obtain ⟨r'', hr''0, hr''1, rfl⟩ := x.sub hXmem
      rw [a_rel, aRel_iff hr''0 hr''1 (R_mem_Ico0 (x.sub hxr)).1 (R_mem_Ico0 (x.sub
    hxr)).2] at hrel
      rcases hrel with hlt | ⟨-, hreq⟩
      · calc sInf (cutS x) ≤ (r'' : ?) := csInf_le hSbdd ⟨r'', hXmem, rfl⟩
          _ < (r : ?) := by exact_mod_cast hlt
      · exact absurd hreq hr1
  · rintro ⟨hr1, hc | rfl⟩
    · obtain ⟨q, ⟨r0, hr0mem, rfl⟩, hqlt⟩ := exists_lt_of_csInf_lt hSne hc
      dsimp only at hqlt
      have hr0r : r0 < r := by exact_mod_cast hqlt
      have hr0pos : 0 < r0 := (R_mem_Ico0 (x.sub hr0mem)).1
      exact x.up_mem hr0mem ⟨r, hr0pos.trans hr0r, hr1, rfl⟩ (Set.Ico_subset_Ico le_rfl
     hr0r.le)
    · rw [← R_master]; exact x.master_mem

theorem cutU_mono {t t' : ?} (htt' : t ≤ t') {r : ?} (h : cutU t r) : cutU t' r := by
  refine ⟨h.1, ?_⟩
  rcases h.2 with hc | rfl
  · exact Or.inl (by linarith)
  · exact Or.inr rfl

theorem le_iff_U {x y : R.Element} :
    x ≤ y ↔ ∀ r : ?, x.mem (Set.Ico 0 r) → y.mem (Set.Ico 0 r) :=
  ⟨fun h r => h (Set.Ico 0 r), fun h X hX => by
    obtain ⟨r, _, _, rfl⟩ := x.sub hX; exact h r hX⟩

theorem cutElt_le_iff {t t' : ?} (_ht0 : 0 ≤ t) (ht1 : t ≤ 1) (ht0' : 0 ≤ t') (ht1' :
     t' ≤ 1) :
    cutElt t ht1 ≤ cutElt t' ht1' ↔ t ≤ t' := by
  rw [le_iff_U]
  simp only [cutElt_mem]
  constructor
  · intro h
    by_contra hlt
    rw [not_le] at hlt
    obtain ⟨r, hr1, hr2⟩ := exists_rat_btwn (show (1 - t : ?) < 1 - t' by linarith)
    have hrle1 : r ≤ 1 := by
      have : (r : ?) < 1 := by linarith
      exact_mod_cast this.le
    have hcutt' : cutU t' r := h r ⟨hrle1, Or.inl hr1⟩
    rcases hcutt'.2 with hc' | hreq
    · linarith
    · rw [hreq] at hr2; norm_num at hr2; linarith
  · exact fun htt' r hr => cutU_mono htt' hr

theorem cutElt_injective {t t' : ?} (ht0 : 0 ≤ t) (ht1 : t ≤ 1) (ht0' : 0 ≤ t') (ht1'
     : t' ≤ 1)
    (h : cutElt t ht1 = cutElt t' ht1') : t = t' :=
  le_antisymm ((cutElt_le_iff ht0 ht1 ht0' ht1').mp h.le) ((cutElt_le_iff ht0' ht1'
    ht0 ht1).mp h.ge)

theorem toElementMap_cutElt {t : ?} (ht1 : t ≤ 1) :
    a.toElementMap (cutElt t ht1) = cutElt t ht1 := by
```

```
  apply Element.ext_U
  intro s
  simp only [mem_toElementMap, a_rel, cutElt_mem]
  constructor
  · rintro ⟨X, hX, hrel⟩
    obtain ⟨r, hUr, rfl⟩ := hX
    have hs01 := R_mem_Ico0 (a.rel_cod (a_rel.mpr hrel))
    rw [aRel_iff (cutU_pos ht1 hUr) (cutU_le1 hUr) hs01.1 hs01.2] at hrel
    rcases hrel with hlt | ⟨hr1, hs1⟩
    · rcases hUr.2 with hc | hr1
      · exact ⟨hs01.2, Or.inl (lt_trans hc (by exact_mod_cast hlt))⟩
      · exact absurd (hr1 ▸ hlt : (1:?) < s) (not_lt.mpr hs01.2)
    · exact ⟨hs01.2, Or.inr hs1⟩
  · intro hs
    rcases hs.2 with hc | rfl
    · obtain ⟨r, hr1, hr2⟩ := exists_rat_btwn hc
      have hr0 : 0 < r := by
        have : (0:?) ≤ 1 - t := by linarith
        exact_mod_cast lt_of_le_of_lt this hr1
      have hrle1 : r ≤ 1 := by
        have : (r:?) < (s:?) := hr2
        have hrs : r < s := by exact_mod_cast this
        exact hrs.le.trans hs.1
      exact ⟨Set.Ico 0 r, ⟨r, ⟨hrle1, Or.inl hr1⟩, rfl⟩, r, s, hr0, hrle1, cutU_pos ht1
    hs,
        cutU_le1 hs, rfl, rfl, Or.inl (by exact_mod_cast hr2)⟩
    · exact ⟨Set.Ico 0 1, ⟨1, cutU_one, rfl⟩, 1, 1, one_pos, le_rfl, one_pos, le_rfl,
    rfl, rfl,
        Or.inr ⟨rfl, rfl⟩⟩

noncomputable def fixOrderIso : {y : R.Element // a.toElementMap y = y} ≃o Set.Icc (0
    : ?) 1 where
  toFun y := ⟨cutPoint y.1, cutPoint_nonneg y.1, cutPoint_le_one y.1⟩
  invFun t := ⟨cutElt t.1 t.2.2, toElementMap_cutElt t.2.2⟩
  left_inv y := Subtype.ext (cutElt_cutPoint y.2)
  right_inv t := Subtype.ext (cutElt_injective (cutPoint_nonneg _) (cutPoint_le_one _)
     t.2.1 t.2.2
    (cutElt_cutPoint (toElementMap_cutElt t.2.2)))
  map_rel_iff' := by
    intro y y'
    show cutPoint y.1 ≤ cutPoint y'.1 ↔ y.1 ≤ y'.1
    constructor
    · intro h
      have h' := (cutElt_le_iff (cutPoint_nonneg y.1) (cutPoint_le_one y.1) (
    cutPoint_nonneg y'.1)
        (cutPoint_le_one y'.1)).mpr h
      rwa [cutElt_cutPoint y.2, cutElt_cutPoint y'.2] at h'
    · intro h
      rw [← cutElt_cutPoint y.2, ← cutElt_cutPoint y'.2] at h
      exact (cutElt_le_iff (cutPoint_nonneg y.1) (cutPoint_le_one y.1) (
    cutPoint_nonneg y'.1)
        (cutPoint_le_one y'.1)).mp h

theorem aRel_le {r s : ?} (h : r < s ∨ (r = 1 ∧ s = 1)) : r ≤ s := by
  rcases h with h | ⟨rfl, rfl⟩
  · exact h.le
```

```
  · exact le_rfl

theorem isRetraction_a : Retraction a := by
  constructor
  apply ApproximableMap.ext
  intro X Z
  constructor
  · rintro ⟨Y, ⟨r, s, hr0, hr1, hs0, hs1, rfl, rfl, hcond1⟩,
      ⟨s', t, hs0', hs1', ht0, ht1, hYs', rfl, hcond2⟩⟩
    have hss' : s = s' := Ico0_inj hs0 hs0' hYs'
    subst hss'
    refine ⟨r, t, hr0, hr1, ht0, ht1, rfl, rfl, ?_⟩
    rcases hcond1 with h1 | ⟨rfl, rfl⟩
    · rcases hcond2 with h2 | ⟨rfl, rfl⟩
      · exact Or.inl (h1.trans h2)
      · exact Or.inl h1
    · rcases hcond2 with h2 | ⟨-, rfl⟩
      · exact absurd (h2.trans_le ht1) (lt_irrefl _)
      · exact Or.inr ⟨rfl, rfl⟩
  · rintro ⟨r, t, hr0, hr1, ht0, ht1, rfl, rfl, hcond⟩
    rcases hcond with h | ⟨rfl, rfl⟩
    · obtain ⟨s, hrs, hst⟩ := exists_between h
      have hs0 : 0 < s := hr0.trans hrs
      have hs1 : s ≤ 1 := (hst.trans_le ht1).le
      exact ⟨Set.Ico 0 s, ⟨r, s, hr0, hr1, hs0, hs1, rfl, rfl, Or.inl hrs⟩,
        ⟨s, t, hs0, hs1, ht0, ht1, rfl, rfl, Or.inl hst⟩⟩
    · exact ⟨Set.Ico 0 1, ⟨1, 1, one_pos, le_rfl, one_pos, le_rfl, rfl, rfl, Or.inr ⟨rfl
    , rfl⟩⟩,
        ⟨1, 1, one_pos, le_rfl, one_pos, le_rfl, rfl, rfl, Or.inr ⟨rfl, rfl⟩⟩⟩

theorem isProjection_a : IsProjection a := by
  refine ⟨isRetraction_a, ?_⟩
  rintro X Y ⟨r, s, hr0, hr1, hs0, hs1, rfl, rfl, hcond⟩
  exact ⟨⟨r, hr0, hr1, rfl⟩, ⟨s, hs0, hs1, rfl⟩, Set.Ico_subset_Ico le_rfl (aRel_le
    hcond)⟩

theorem not_isCompactElt_pos {β : Type} {F : NeighborhoodSystem β}
    (g : Set.Icc (0 : ?) 1 ≃o F.Element) {t : ?} (ht0 : 0 ≤ t) (ht1 : t ≤ 1) (htpos :
     0 < t) :
    ¬ IsCompactElt (g ⟨t, ht0, ht1⟩) := by
  intro hcompact
  set S : Set (Set.Icc (0 : ?) 1) := {x | x.1 ∈ Set.Ico (0 : ?) t} with hSdef
  have hmem0 : (⟨0, le_refl 0, zero_le_one⟩ : Set.Icc (0 : ?) 1) ∈ S := ⟨le_refl 0,
    htpos⟩
  have : Nonempty S := ⟨⟨_, hmem0⟩⟩
  set fam : S → F.Element := fun x => g x.1 with hfamdef
  have hdir : ∀ i j : S, ∃ k : S, fam i ≤ fam k ∧ fam j ≤ fam k := by
    rintro ⟨x, hx⟩ ⟨y, hy⟩
    refine ⟨⟨max x.1 y.1, le_max_of_le_left x.2.1, (max_lt hx.2 hy.2).le.trans ht1⟩,
      ⟨le_max_of_le_left x.2.1, max_lt hx.2 hy.2⟩⟩, ?_, ?_⟩
    · exact g.monotone (le_max_left x.1 y.1)
    · exact g.monotone (le_max_right x.1 y.1)
  have hSisLUB : IsLUB S (⟨t, ht0, ht1⟩ : Set.Icc (0 : ?) 1) := by
    constructor
    · rintro x hx
      exact hx.2.le
```

```
    · intro ub hub
      exact (isLUB_Ico htpos).2 (fun y hy =>
        hub (show (⟨y, hy.1, hy.2.le.trans ht1⟩ : Set.Icc (0 : ?) 1) ∈ S from hy))
  have hgSisLUB : IsLUB (g '' S) (g ⟨t, ht0, ht1⟩) := g.isLUB_image'.mpr hSisLUB
  have hrange : Set.range fam = g '' S := by
    ext z
    constructor
    · rintro ⟨⟨x, hx⟩, rfl⟩; exact ⟨x, hx, rfl⟩
    · rintro ⟨x, hx, rfl⟩; exact ⟨⟨x, hx⟩, rfl⟩
  have hisLUBfam : IsLUB (Set.range fam) (g ⟨t, ht0, ht1⟩) := hrange ▸ hgSisLUB
  have hisLUBiSup : IsLUB (Set.range fam) (iSupDirected fam hdir) :=
    ⟨fun _ ⟨i, hi⟩ => hi ▸ le_iSupDirected fam hdir i,
      fun y hy => iSupDirected_le fam hdir (fun i => hy ⟨i, rfl⟩)⟩
  have heq : iSupDirected fam hdir = g ⟨t, ht0, ht1⟩ := hisLUBiSup.unique hisLUBfam
  obtain ⟨i, hi⟩ := hcompact fam hdir (le_of_eq heq.symm)
  have hle : (⟨t, ht0, ht1⟩ : Set.Icc (0 : ?) 1) ≤ i.1 := g.le_iff_le.mp hi


  exact absurd hle (not_le.mpr i.2.2)

theorem not_isFinitary_a : ¬ IsFinitary a := by
  rintro ⟨β, F, ⟨e⟩⟩
  set g : Set.Icc (0 : ?) 1 ≃o F.Element := fixOrderIso.symm.trans e with hgdef
  set x : F.Element := g ⟨1, zero_le_one, le_refl 1⟩ with hxdef
  have hcompact_bot : ∀ i : {X : Set β // x.mem X}, F.principal (x.sub i.2) = g ⟨0,
    le_refl 0, zero_le_one⟩ := by
    intro i
    by_contra hne
    have hc0 : g.symm (F.principal (x.sub i.2)) = ⟨0, le_refl 0, zero_le_one⟩ := fun h
    => hne (by
      rw [← h, OrderIso.apply_symm_apply])
    have ht0 : (0:?) ≤ (g.symm (F.principal (x.sub i.2))).1 := (g.symm (F.principal (x
    .sub i.2))).2.1
    have ht1 : (g.symm (F.principal (x.sub i.2))).1 ≤ 1 := (g.symm (F.principal (x.sub
     i.2))).2.2
    have htpos : 0 < (g.symm (F.principal (x.sub i.2))).1 := by
      rcases ht0.lt_or_eq with h | h
      · exact h
      · exact absurd (Subtype.ext h.symm) hc0
    have hsub : (⟨(g.symm (F.principal (x.sub i.2))).1, ht0, ht1⟩ : Set.Icc (0 : ?) 1)
        = g.symm (F.principal (x.sub i.2)) := Subtype.ext rfl
    have heq2 : F.principal (x.sub i.2) = g ⟨(g.symm (F.principal (x.sub i.2))).1, ht0,
     ht1⟩ := by
      rw [hsub, OrderIso.apply_symm_apply]
    exact not_isCompactElt_pos g ht0 ht1 htpos (heq2 ▸ principal_isCompactElt (x.sub i
    .2))
  have hxeq : x = g ⟨0, le_refl 0, zero_le_one⟩ := by
    conv_lhs => rw [eq_iSupDirected_principal x]
    apply le_antisymm
    · apply iSupDirected_le
      intro i
      exact le_of_eq (hcompact_bot i)
    · obtain ⟨i0⟩ := (instNonemptyMemSubtype x)
      have hstep : g ⟨0, le_refl 0, zero_le_one⟩ ≤
          iSupDirected (fun j : {X : Set β // x.mem X} => F.principal (x.sub j.2))
            (principalFamily_directed x) := by
        rw [← hcompact_bot i0]
```

```
        exact le_iSupDirected (fun j : {X : Set β // x.mem X} => F.principal (x.sub j
    .2))
          (principalFamily_directed x) i0
      exact hstep
  have : (⟨1, zero_le_one, le_refl 1⟩ : Set.Icc (0:?) 1) = ⟨0, le_refl 0, zero_le_one⟩
    :=
    g.injective hxeq
  exact absurd (congrArg Subtype.val this) one_ne_zero

end DomainTheory.NeighbourhoodSystems.Exercise811
```

Exercise_8_11.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    DedekindCutProjection

@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem

theorem exercise_8_11 :
    IsProjection Exercise811.a ∧ Retraction Exercise811.a ∧ ¬IsFinitary Exercise811.a
    :=
  ⟨Exercise811.isProjection_a, Exercise811.isRetraction_a, Exercise811.not_isFinitary_a
    ⟩

end
```

The tip then assembles those tools into Scott's statement.
— exercise_8_11

3.9.14 Exercise 8.12 — integer presentation of U

Exercise_8_12.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812_UV
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18

@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem Exercise718

theorem exercise_8_12 :
    V.IsEffectivelyGiven ∧
      EffectivelyIsomorphic UComputablePresentation VComputablePresentation :=
  ⟨V.isEffectivelyGiven, ⟨effectiveIso812_UV⟩⟩

end
```

deltaPair.lean

```
module

public import Mathlib.Data.Nat.Bitwise
public import Mathlib.Tactic

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

def encodeDeltaPair (? : ℕ → Bool × Bool) : ℕ → ℕ
  | 0 => 0
  | n + 1 => encodeDeltaPair ? n +
      ((if (? n).1 then 1 else 0) + (if (? n).2 then 2 else 0)) * 4 ^ n

namespace encodeDeltaPair

theorem lt (? : ℕ → Bool × Bool) : ∀ n, encodeDeltaPair ? n < 4 ^ n
  | 0 => by simp [encodeDeltaPair]
  | n + 1 => by
      have ih := lt ? n
      have h4 : (4 : ℕ) ^ (n + 1) = 4 ^ n * 4 := pow_succ 4 n
      show encodeDeltaPair ? n +
        ((if (? n).1 then 1 else 0) + (if (? n).2 then 2 else 0)) * 4 ^ n < 4 ^ (n +
    1)
      rcases Bool.eq_false_or_eq_true (? n).1 with h1 | h1 <;>
        rcases Bool.eq_false_or_eq_true (? n).2 with h2 | h2 <;>
        simp only [h1, h2, ite_true, ite_false, Bool.false_eq_true] <;> omega

end encodeDeltaPair

def deltaPair (k : ℕ) : ℕ → Bool × Bool :=
  fun i => (decide ((k / 4 ^ i) % 2 = 1), decide ((k / 4 ^ i / 2) % 2 = 1))

namespace deltaPair

theorem fst_eq_testBit (k i : ℕ) : (deltaPair k i).1 = k.testBit (2 * i) := by
  show decide ((k / 4 ^ i) % 2 = 1) = k.testBit (2 * i)
  rw [Nat.testBit_eq_decide_div_mod_eq, show (4 : ℕ) ^ i = 2 ^ (2 * i) by
    rw [show (4 : ℕ) = 2 ^ 2 from rfl, ← pow_mul]]

theorem snd_eq_testBit (k i : ℕ) : (deltaPair k i).2 = k.testBit (2 * i + 1) := by
  show decide ((k / 4 ^ i / 2) % 2 = 1) = k.testBit (2 * i + 1)
  rw [Nat.div_div_eq_div_mul, Nat.testBit_eq_decide_div_mod_eq, show (4 : ℕ) ^ i * 2 =
     2 ^ (2 * i + 1)
    by rw [show (4 : ℕ) = 2 ^ 2 from rfl, ← pow_mul, pow_succ]]

theorem encodeDeltaPair (? : ℕ → Bool × Bool) :
    ∀ n i, i < n → deltaPair (DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? n) i
     = ? i := by
  intro n
  induction n with
  | zero => intro i hi; exact absurd hi (Nat.not_lt_zero i)
  | succ n ih =>
    intro i hi
```

```
    rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
    · show (decide ((DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? (n + 1) / 4 ^
    i) % 2 = 1),
          decide ((DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? (n + 1) / 4 ^ i
     / 2) % 2 = 1)) = ? i
      have key : DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? (n + 1) / 4 ^ i %
     4 =
          DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? n / 4 ^ i % 4 := by
        show (DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? n +
          ((if (? n).1 then 1 else 0) + (if (? n).2 then 2 else 0)) * 4 ^ n) / 4 ^ i %
     4 = _
        obtain ⟨j, rfl⟩ := Nat.exists_eq_add_of_lt hi'
        have heq : ((if (? (i + j + 1)).1 then 1 else 0) + (if (? (i + j + 1)).2 then
    2 else 0)) *
            4 ^ (i + j + 1) = 4 ^ i * (4 * 4 ^ j *
              ((if (? (i + j + 1)).1 then 1 else 0) + (if (? (i + j + 1)).2 then 2
    else 0))) := by
          ring
        rw [heq, Nat.add_mul_div_left _ _ (pow_pos (by norm_num) i)]
        rw [show 4 * 4 ^ j *
            ((if (? (i + j + 1)).1 then 1 else 0) + (if (? (i + j + 1)).2 then 2 else
    0)) =
            4 * (4 ^ j * ((if (? (i + j + 1)).1 then 1 else 0) +
              (if (? (i + j + 1)).2 then 2 else 0))) by ring]
        exact Nat.add_mul_mod_self_left _ _ _
      have h1 : (DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? (n + 1) / 4 ^ i)
    % 2 =
          (DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? n / 4 ^ i) % 2 := by
    omega
      have h2 : (DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? (n + 1) / 4 ^ i /
     2) % 2 =
          (DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? n / 4 ^ i / 2) % 2 :=
    by omega
      rw [h1, h2]
      show (decide ((DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? n / 4 ^ i) %
    2 = 1),
          decide ((DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? n / 4 ^ i / 2)
    % 2 = 1)) = ? i
      exact ih i hi'
    · have hd : DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? (i + 1) / 4 ^ i =
          (if (? i).1 then 1 else 0) + (if (? i).2 then 2 else 0) := by
        show (DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? i +
            ((if (? i).1 then 1 else 0) + (if (? i).2 then 2 else 0)) * 4 ^ i) / 4 ^ i
     = _
        rw [Nat.add_mul_div_right _ _ (pow_pos (by norm_num) i),
          Nat.div_eq_of_lt (encodeDeltaPair.lt ? i), Nat.zero_add]
      show (decide ((DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? (i + 1) / 4 ^
     i) % 2 = 1),
          decide ((DomainTheory.NeighbourhoodSystems.encodeDeltaPair ? (i + 1) / 4 ^ i
     / 2) % 2 = 1)) = ? i
      rw [hd]
      rcases Bool.eq_false_or_eq_true (? i).1 with h1 | h1 <;>
        rcases Bool.eq_false_or_eq_true (? i).2 with h2 | h2 <;>
        simp [h1, h2, Prod.ext_iff]

theorem exists_ne_of_lt_of_ne {n k k' : ℕ} (hk : k < 4 ^ n) (hk' : k' < 4 ^ n)
```

```
    (hne : k = k') : ∃ i < n, deltaPair k i = deltaPair k' i := by
  by_contra hcon
  push Not at hcon
  exact hne (by
    apply Nat.eq_of_testBit_eq
    intro l
    rcases Nat.lt_or_ge l (2 * n) with hl | hl
    · rcases Nat.mod_two_eq_zero_or_one l with hmod | hmod
      · have hl2 : l = 2 * (l / 2) := by omega
        have hi : l / 2 < n := by omega
        have heq := congrArg Prod.fst (hcon (l / 2) hi)
        rw [fst_eq_testBit, fst_eq_testBit] at heq
        rwa [hl2]
      · have hl2 : l = 2 * (l / 2) + 1 := by omega
        have hi : l / 2 < n := by omega
        have heq := congrArg Prod.snd (hcon (l / 2) hi)
        rw [snd_eq_testBit, snd_eq_testBit] at heq
        rwa [hl2]
    · have h4n : (4 : ℕ) ^ n = 2 ^ (2 * n) := by
        rw [show (4 : ℕ) = 2 ^ 2 from rfl, ← pow_mul]
      have hile : (2 : ℕ) ^ (2 * n) ≤ 2 ^ l := Nat.pow_le_pow_right (by norm_num) hl
      rw [Nat.testBit_lt_two_pow ((h4n ▸ hk).trans_le hile),
        Nat.testBit_lt_two_pow ((h4n ▸ hk').trans_le hile)])

end deltaPair

end DomainTheory.NeighbourhoodSystems
```

V.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    NeighborhoodSystem
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Exercise_1_19
public import Mathlib.Data.Fintype.Defs
public import Mathlib.Algebra.BigOperators.Group.Finset.Basic
public import Mathlib.Data.Nat.Bitwise
public import Mathlib.Data.Nat.BitIndices
public import Mathlib.Combinatorics.Colex

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

def affine (k ? : ℕ) : Set ℕ := {n : ℕ | n % 2 ^ k = ?}

@[simp] theorem mem_affine {k ? n : ℕ} : n ∈ affine k ? ↔ n % 2 ^ k = ? := Iff.rfl

namespace affine
open NeighborhoodSystem

theorem nonempty {k ? : ℕ} (h? : ? < 2 ^ k) : (affine k ?).Nonempty :=
```

```
  ⟨?, Nat.mod_eq_of_lt h?⟩

end affine
open NeighborhoodSystem

def levelSet (k m : ℕ) : Set ℕ := {n : ℕ | m.testBit (n % 2 ^ k) = true}

@[simp] theorem mem_levelSet {k m n : ℕ} : n ∈ levelSet k m ↔ m.testBit (n % 2 ^ k) =
     true :=
  Iff.rfl

namespace levelSet
open NeighborhoodSystem

theorem inter_same_level (k m₁ m₂ : ℕ) :
    levelSet k m₁ ∩ levelSet k m₂ = levelSet k (m₁ &&& m₂) := by
  ext n; simp [levelSet, Nat.testBit_and]

theorem nonempty_iff {k m : ℕ} :
    (levelSet k m).Nonempty ↔ ∃ ? < 2 ^ k, m.testBit ? = true := by
  constructor
  · rintro ⟨n, hn⟩
    exact ⟨n % 2 ^ k, Nat.mod_lt n (by positivity), hn⟩
  · rintro ⟨?, h?, hm⟩
    exact ⟨?, by rw [mem_levelSet, Nat.mod_eq_of_lt h?]; exact hm⟩

theorem union_same_level (k m₁ m₂ : ℕ) :
    levelSet k m₁ ∪ levelSet k m₂ = levelSet k (m₁ ||| m₂) := by
  ext n; simp [levelSet, Nat.testBit_or]

theorem eq_biUnion (k m : ℕ) :
    levelSet k m = ⋃ ? ∈ (Finset.range (2 ^ k)).filter (fun ? => m.testBit ?), affine
    k ? := by
  ext n
  simp only [mem_levelSet, Set.mem_iUnion, Finset.mem_filter, Finset.mem_range,
    mem_affine,
    exists_prop]
  constructor
  · intro h; exact ⟨n % 2 ^ k, ⟨Nat.mod_lt n (by positivity), h⟩, rfl⟩
  · rintro ⟨?, ⟨-, hm⟩, rfl⟩; exact hm

end levelSet
namespace affine
open NeighborhoodSystem

theorem eq_levelSet (k ? : ℕ) : affine k ? = levelSet k (2 ^ ?) := by
  ext n
  simp [mem_affine, mem_levelSet, Nat.testBit_two_pow, eq_comm]

end affine
open NeighborhoodSystem

def upsample (k k' m : ℕ) : ℕ :=
  ? r ∈ (Finset.range (2 ^ k')).filter (fun r => m.testBit (r % 2 ^ k)), 2 ^ r

namespace testBit
```

```
open NeighborhoodSystem

theorem upsample {k k' m r : ℕ} (hr : r < 2 ^ k') :
    (_root_.DomainTheory.NeighbourhoodSystems.upsample k k' m).testBit r ↔ m.testBit (
    r % 2 ^ k) := by
  unfold _root_.DomainTheory.NeighbourhoodSystems.upsample
  rw [← Nat.mem_bitIndices, ← List.mem_toFinset, Finset.
    toFinset_bitIndices_sum_two_pow,
    Finset.mem_filter, Finset.mem_range]
  simp [hr]

end testBit
namespace levelSet
open NeighborhoodSystem

theorem zero_one : levelSet 0 1 = Set.univ := by
  ext n; simp [levelSet, Nat.mod_one]

theorem upsample {k k' m : ℕ} (hk : k ≤ k') : levelSet k' (_root_.DomainTheory.
    NeighbourhoodSystems.upsample k k' m) = levelSet k m := by
  ext n
  simp only [mem_levelSet]
  rw [testBit.upsample (Nat.mod_lt n (by positivity)),
    Nat.mod_mod_of_dvd n (pow_dvd_pow 2 hk)]

theorem inter (k₁ m₁ k₂ m₂ : ℕ) :
    levelSet k₁ m₁ ∩ levelSet k₂ m₂
      = levelSet (max k₁ k₂) (_root_.DomainTheory.NeighbourhoodSystems.upsample k₁ (max
     k₁ k₂) m₁ &&& _root_.DomainTheory.NeighbourhoodSystems.upsample k₂ (max k₁ k₂) m₂)
    := by
  rw [← levelSet.upsample (le_max_left k₁ k₂) (m := m₁), ← levelSet.upsample (
    le_max_right k₁ k₂) (m := m₂)]
  ext n
  simp only [mem_levelSet, Set.mem_inter_iff, Nat.testBit_and, Bool.and_eq_true]

end levelSet

namespace testBit
open NeighborhoodSystem

theorem xor_and_self (a b : ℕ) (i : ℕ) :
    (a ^^^ (a &&& b)).testBit i = (a.testBit i && !b.testBit i) := by
  rw [Nat.testBit_xor, Nat.testBit_and]
  cases a.testBit i <;> cases b.testBit i <;> rfl

end testBit

namespace levelSet
open NeighborhoodSystem

theorem diff (k₁ m₁ k₂ m₂ : ℕ) :
    levelSet k₁ m₁ \ levelSet k₂ m₂
      = levelSet (max k₁ k₂)
          (let a := _root_.DomainTheory.NeighbourhoodSystems.upsample k₁ (max k₁ k₂) m₁
           let b := _root_.DomainTheory.NeighbourhoodSystems.upsample k₂ (max k₁ k₂) m₂
           a ^^^ (a &&& b)) := by
```

```
  rw [← levelSet.upsample (le_max_left k₁ k₂) (m := m₁),
    ← levelSet.upsample (le_max_right k₁ k₂) (m := m₂)]
  ext n
  simp only [mem_levelSet, Set.mem_sdiff, testBit.xor_and_self, Bool.and_eq_true, Bool
    .not_eq_true,
    Bool.not_eq_true']

end levelSet

open NeighborhoodSystem

def V : NeighborhoodSystem ℕ where
  mem X := ∃ k m, X = levelSet k m ∧ X.Nonempty
  master := Set.univ
  master_nonempty := Set.univ_nonempty
  master_mem := ⟨0, 1, levelSet.zero_one.symm, Set.univ_nonempty⟩
  inter_mem := by
    rintro X Y Z ⟨k₁, m₁, rfl, -⟩ ⟨k₂, m₂, rfl, -⟩ ⟨k₃, m₃, rfl, hZne⟩ hZsub
    exact ⟨max k₁ k₂, upsample k₁ (max k₁ k₂) m₁ &&& upsample k₂ (max k₁ k₂) m₂,
      levelSet.inter k₁ m₁ k₂ m₂, hZne.mono hZsub⟩
  sub_master := by rintro X _; exact Set.subset_univ X

namespace V

theorem union_mem {X Y : Set ℕ} (hX : X = ∅ ∨ V.mem X) (hY : Y = ∅ ∨ V.mem Y) :
    X ∪ Y = ∅ ∨ V.mem (X ∪ Y) := by
  rcases hX with rfl | hX
  · simpa using hY
  rcases hY with rfl | hY
  · simpa using Or.inr hX
  obtain ⟨k₁, m₁, rfl, hXne⟩ := hX
  obtain ⟨k₂, m₂, rfl, -⟩ := hY
  have heq : levelSet k₁ m₁ ∪ levelSet k₂ m₂
      = levelSet (max k₁ k₂) (upsample k₁ (max k₁ k₂) m₁ ||| upsample k₂ (max k₁ k₂) m₂)
    := by
    rw [← levelSet.union_same_level, levelSet.upsample (le_max_left k₁ k₂),
      levelSet.upsample (le_max_right k₁ k₂)]
  exact Or.inr ⟨max k₁ k₂, _, heq, hXne.mono Set.subset_union_left⟩

theorem iUnion_mem {ι : Type*} [Fintype ι] {f : ι → Set ℕ} (hf : ∀ i, f i = ∅ ∨ V.mem (
    f i))
    (hne : (⋃ i, f i).Nonempty) : V.mem (⋃ i, f i) := by
  classical
  have hstep : ∀ s : Finset ι, (⋃ i ∈ s, f i) = ∅ ∨ V.mem (⋃ i ∈ s, f i) := by
    intro s
    induction s using Finset.induction_on with
    | empty => exact Or.inl (by simp)
    | insert i s hi ih =>
      rw [Finset.set_biUnion_insert]
      exact union_mem (hf i) ih
  have hall : (⋃ i, f i) = ⋃ i ∈ (Finset.univ : Finset ι), f i := by simp
  rw [hall] at hne ⊢
  exact (hstep Finset.univ).resolve_left hne.ne_empty

theorem mem_iff_finiteUnion {X : Set ℕ} :
    V.mem X ↔
```

```
    ∃ F : Finset (ℕ × ℕ), (∀ p ∈ F, p.2 < 2 ^ p.1) ∧ X = ⋃ p ∈ F, affine p.1 p.2 ∧
  X.Nonempty := by
 constructor
 · rintro ⟨k, m, rfl, hne⟩
   refine ⟨(Finset.range (2 ^ k)).filter (fun ? => m.testBit ?) |>.image (fun ? => (k,
    ?)), ?_, ?_, hne⟩
   · rintro ⟨k', ?⟩ hp
     obtain ⟨?', h?', heq⟩ := Finset.mem_image.mp hp
     obtain ⟨hlt, -⟩ := Finset.mem_filter.mp h?'
     simp only [Finset.mem_range] at hlt
     obtain ⟨rfl, rfl⟩ := Prod.mk.injEq .. ▶ heq
     exact hlt
   · rw [levelSet.eq_biUnion]
     ext n
     simp only [Set.mem_iUnion, Finset.mem_image, Finset.mem_filter, Finset.mem_range
  ,
       exists_prop, exists_exists_and_eq_and]
 · rintro ⟨F, hbound, rfl, hne⟩
   have hf : ∀ p : F, affine p.1.1 p.1.2 = ∅ ∨ V.mem (affine p.1.1 p.1.2) :=
     fun ⟨p, hp⟩ => Or.inr ⟨p.1, 2 ^ p.2, affine.eq_levelSet p.1 p.2,
       affine.eq_levelSet p.1 p.2 ▶ affine.nonempty (hbound p hp)⟩
   have hrw : (⋃ p ∈ F, affine p.1 p.2) = ⋃ p : F, affine p.1.1 p.1.2 := by
     ext n; simp only [Set.mem_iUnion, exists_prop, Subtype.exists]
   rw [hrw] at hne ⊢
   exact iUnion_mem hf hne

set_option linter.unusedVariables false

theorem example_812 : ∀ {X : Set Nat},
 Iff (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem Nat DomainTheory.
   NeighbourhoodSystems.V X)
   (∃ (F : Finset (Prod Nat Nat)),
     And
       (∀ (p : Prod Nat Nat),
         @Membership.mem (Prod Nat Nat) (Finset (Prod Nat Nat))
           (@SetLike.instMembership (Finset (Prod Nat Nat)) (Prod Nat Nat) (@Finset
  .instSetLike (Prod Nat Nat))) F
           p →
         @LT.lt Nat instLTNat (@Prod.snd Nat Nat p)
           (@HPow.hPow Nat Nat Nat (@instHPow Nat Nat (@NPow.toPow Nat (@Monoid.
  toNPow Nat Nat.instMonoid)))
             (@OfNat.ofNat Nat (nat_lit 2) (instOfNatNat (nat_lit 2))) (@Prod.fst
  Nat Nat p)))
       (And
         (@Eq (Set Nat) X
           (⋃ (p : Prod Nat Nat),
             ⋃ (_ :
               @Membership.mem (Prod Nat Nat) (Finset (Prod Nat Nat))
                 (@SetLike.instMembership (Finset (Prod Nat Nat)) (Prod Nat Nat) (
  @Finset.instSetLike (Prod Nat Nat)))
                 F p),
               DomainTheory.NeighbourhoodSystems.affine (@Prod.fst Nat Nat p) (@Prod.
  snd Nat Nat p)))
         (@Set.Nonempty Nat X))) :=
 mem_iff_finiteUnion
```

```
theorem no_minimal {X : Set ℕ} (hX : V.mem X) :
    ∃ Y Z : Set ℕ, V.mem Y ∧ V.mem Z ∧ Y ∩ Z = ∅ ∧ Y ∪ Z = X ∧ Y = X ∧ Z = X := by
  obtain ⟨k, m, rfl, hne⟩ := hX
  obtain ⟨?₀, h?₀, hbit⟩ := levelSet.nonempty_iff.mp hne
  have hstep : 2 ^ (k + 1) = 2 ^ k + 2 ^ k := by rw [pow_succ]; ring
  have h?₀2 : ?₀ < 2 ^ (k + 1) := by omega
  have h?₀' : ?₀ + 2 ^ k < 2 ^ (k + 1) := by omega
  set M := upsample k (k + 1) m with hM
  have hXM : levelSet k m = levelSet (k + 1) M := (levelSet.upsample (Nat.le_succ k)).
    symm
  have hM?₀ : M.testBit ?₀ = true := by
    rw [hM, testBit.upsample h?₀2, Nat.mod_eq_of_lt h?₀]; exact hbit
  have hM?₀' : M.testBit (?₀ + 2 ^ k) = true := by
    rw [hM, testBit.upsample h?₀', Nat.add_mod_right, Nat.mod_eq_of_lt h?₀]; exact hbit
  set Y := levelSet (k + 1) (2 ^ ?₀) with hYdef
  set Z := levelSet (k + 1) (M ^^^ 2 ^ ?₀) with hZdef
  have hYmem : V.mem Y := ⟨k + 1, 2 ^ ?₀, rfl, levelSet.nonempty_iff.mpr ⟨?₀, h?₀2, by
    simp⟩⟩
  have hZmem : V.mem Z := ⟨k + 1, M ^^^ 2 ^ ?₀, rfl,
    levelSet.nonempty_iff.mpr ⟨?₀ + 2 ^ k, h?₀', by
      rw [Nat.testBit_xor, hM?₀']; simp⟩⟩
  have hInter : Y ∩ Z = ∅ := by
    rw [hYdef, hZdef, levelSet.inter_same_level]
    ext n
    simp only [mem_levelSet, Set.mem_empty_iff_false, iff_false, Nat.testBit_and, Bool
    .and_eq_true]
    rintro ⟨h1, h2⟩
    have hpos : n % 2 ^ (k + 1) = ?₀ := by
      by_contra hne'
      rw [Nat.testBit_two_pow] at h1
      exact hne' (of_decide_eq_true h1).symm
    rw [hpos, Nat.testBit_xor, hM?₀] at h2
    simp at h2
  have hUnion : Y ∪ Z = levelSet k m := by
    rw [hYdef, hZdef, levelSet.union_same_level, hXM]
    congr 1
    apply Nat.eq_of_testBit_eq
    intro i
    rw [Nat.testBit_or, Nat.testBit_xor]
    rcases eq_or_ne i ?₀ with rfl | hi
    · simp [hM?₀]
    · simp [Ne.symm hi]
  have hYne : Y.Nonempty := (levelSet.nonempty_iff (k := k + 1) (m := 2 ^ ?₀)).mpr ⟨?₀,
     h?₀2, by simp⟩
  have hZne : Z.Nonempty := (levelSet.nonempty_iff (k := k + 1) (m := M ^^^ 2 ^ ?₀)).
    mpr
    ⟨?₀ + 2 ^ k, h?₀', by
      rw [Nat.testBit_xor, hM?₀']; simp⟩
  refine ⟨Y, Z, hYmem, hZmem, hInter, hUnion, ?_, ?_⟩
  · intro hEq
    apply hZne.ne_empty
    have hZsub : Z ⊆ Y := by rw [hEq]; exact hUnion ▸ Set.subset_union_right
    rw [← hInter, Set.inter_eq_right.mpr hZsub]
  · intro hEq
    apply hYne.ne_empty
    have hYsub : Y ⊆ Z := by rw [hEq]; exact hUnion ▸ Set.subset_union_left
```

```
    rw [← hInter, Set.inter_eq_left.mpr hYsub]

theorem isPositive : V.IsPositive := by
  rintro X Y ⟨k₁, m₁, rfl, -⟩ ⟨k₂, m₂, rfl, -⟩
  refine ⟨fun ⟨k, m, heq, hne⟩ => hne, fun hne => ⟨max k₁ k₂, _, levelSet.inter k₁ m₁ k₂
    m₂, hne⟩⟩

theorem mem_nonempty {X : Set ℕ} (hX : V.mem X) : X.Nonempty := by
  obtain ⟨k, m, -, hne⟩ := hX; exact hne

theorem noMinimal : V.NoMinimal := by
  intro X hX
  obtain ⟨Y, Z, hY, hZ, hYZinter, hYZunion, -, -⟩ := no_minimal hX
  exact ⟨Y, Z, hY, hZ, mem_nonempty hY, mem_nonempty hZ, hYZinter, hYZunion⟩

theorem diff_mem {X Y : Set ℕ} (hX : V.mem X) (hY : V.mem Y) : X \ Y = ∅ ∨ V.mem (X \
    Y) := by
  obtain ⟨k₁, m₁, rfl, -⟩ := hX
  obtain ⟨k₂, m₂, rfl, -⟩ := hY
  rcases Set.eq_empty_or_nonempty (levelSet k₁ m₁ \ levelSet k₂ m₂) with h | h
  · exact Or.inl h
  · exact Or.inr ⟨max k₁ k₂, _, levelSet.diff k₁ m₁ k₂ m₂, h⟩

theorem diffClosed : V.DiffClosed := fun hX hY => diff_mem hX hY

end V

end DomainTheory.NeighbourhoodSystems
```

VX.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_1
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.V
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13
public import Mathlib.Data.Nat.Bitwise

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open Domain.Recursive NeighborhoodSystem

def VmasterIdx : ℕ := Nat.pair 0 1

def lowAnd (x y : ℕ) : ℕ := x % 2 * (y % 2)

namespace primrec
open Domain.Recursive NeighborhoodSystem

theorem lowAnd : Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.lowAnd
```

```
     t.unpair.1 t.unpair.2) :=
   (primrec_mul₂ (primrec_mod2.comp Nat.Primrec.left) (primrec_mod2.comp Nat.Primrec.
     right)).of_eq
     fun _ => rfl

end primrec
open Domain.Recursive NeighborhoodSystem

def landStep (s : ℕ) : ℕ :=
  Nat.pair (Nat.pair (s.unpair.1.unpair.1 / 2) (s.unpair.1.unpair.2 / 2))
    (Nat.pair (2 * s.unpair.2.unpair.1)
      (s.unpair.2.unpair.2 + s.unpair.2.unpair.1 * lowAnd s.unpair.1.unpair.1 s.unpair
    .1.unpair.2))

namespace primrec
open Domain.Recursive NeighborhoodSystem

theorem landStep : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.landStep := by
  have hA : Nat.Primrec (fun s : ℕ => s.unpair.1.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.left
  have hB : Nat.Primrec (fun s : ℕ => s.unpair.1.unpair.2) := Nat.Primrec.right.comp
    Nat.Primrec.left
  have hW : Nat.Primrec (fun s : ℕ => s.unpair.2.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.right
  have hAcc : Nat.Primrec (fun s : ℕ => s.unpair.2.unpair.2) := Nat.Primrec.right.comp
     Nat.Primrec.right
  have hlow : Nat.Primrec (fun s : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    lowAnd s.unpair.1.unpair.1 s.unpair.1.unpair.2) :=
    (primrec.lowAnd.comp (hA.pair hB)).of_eq fun s => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  exact (((primrec_div2.comp hA).pair (primrec_div2.comp hB)).pair
    ((primrec_mul₂ (Nat.Primrec.const 2) hW).pair
      (primrec_add₂ hAcc (primrec_mul₂ hW hlow)))).of_eq fun _ => rfl

end primrec
namespace levelSet
open Domain.Recursive NeighborhoodSystem

theorem inj_of_lt {k a b : ℕ} (ha : a < 2 ^ (2 ^ k)) (hb : b < 2 ^ (2 ^ k))
    (h : levelSet k a = levelSet k b) : a = b := by
  apply Nat.eq_of_testBit_eq
  intro ?
  by_cases h? : ? < 2 ^ k
  · have hiff := Set.ext_iff.mp h ?
    simp only [mem_levelSet, Nat.mod_eq_of_lt h?] at hiff
    cases ha' : a.testBit ? <;> cases hb' : b.testBit ? <;> simp_all
  · have hpow : (2:ℕ) ^ (2 ^ k) ≤ 2 ^ ? := Nat.pow_le_pow_right (by norm_num) (Nat.
    le_of_not_lt h?)
    rw [Nat.testBit_lt_two_pow (lt_of_lt_of_le ha hpow),
      Nat.testBit_lt_two_pow (lt_of_lt_of_le hb hpow)]

end levelSet
open Domain.Recursive NeighborhoodSystem

theorem lowAnd_eq_mod (x y : ℕ) : lowAnd x y = (x &&& y) % 2 := by
  have key : ((x &&& y) % 2 = 1) ↔ (x % 2 = 1 ∧ y % 2 = 1) := by
```

```
    have hb := Nat.testBit_and x y 0
    rw [Nat.testBit_zero, Nat.testBit_zero, Nat.testBit_zero] at hb
    rw [← decide_eq_decide, hb, Bool.decide_and]
  unfold lowAnd
  rcases Nat.mod_two_eq_zero_or_one x with hx | hx <;>
    rcases Nat.mod_two_eq_zero_or_one y with hy | hy <;> rw [hx, hy]
  · have hne : (x &&& y) % 2 = 1 := fun h => by have := key.mp h; omega
    omega
  · have hne : (x &&& y) % 2 = 1 := fun h => by have := key.mp h; omega
    omega
  · have hne : (x &&& y) % 2 = 1 := fun h => by have := key.mp h; omega
    omega
  · exact (key.mpr ⟨hx, hy⟩).symm

theorem land_low_rec (x y : ℕ) : x &&& y = 2 * (x / 2 &&& y / 2) + lowAnd x y := by
  have hdiv : (x &&& y) / 2 = x / 2 &&& y / 2 := by
    apply Nat.eq_of_testBit_eq
    intro i
    rw [← Nat.testBit_add_one, Nat.testBit_and, Nat.testBit_and, Nat.testBit_add_one,
      Nat.testBit_add_one]
  have hmod := lowAnd_eq_mod x y
  conv_lhs => rw [← Nat.div_add_mod (x &&& y) 2]
  rw [hdiv, hmod]

theorem landStep_iter_spec (a b : ℕ) : ∀ k,
    (landStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.unpair.1 = a / 2
    ^ k ∧
    (landStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.unpair.2 = b / 2
    ^ k ∧
    (landStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.1 = 2 ^ k
    ∧
    (landStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.2 +
        2 ^ k * (a / 2 ^ k &&& b / 2 ^ k) = a &&& b := by
  intro k
  induction k with
  | zero =>
    simp only [Function.iterate_zero_apply, unpair_pair_fst, unpair_pair_snd, pow_zero
    ,
      Nat.div_one, Nat.one_mul, Nat.zero_add, true_and]
  | succ k ih =>
    obtain ⟨hA, hB, hW, hAcc⟩ := ih
    rw [Function.iterate_succ_apply']
    have hdd : a / 2 ^ (k + 1) = (a / 2 ^ k) / 2 := by rw [Nat.div_div_eq_div_mul, ←
    pow_succ]
    have hdd' : b / 2 ^ (k + 1) = (b / 2 ^ k) / 2 := by rw [Nat.div_div_eq_div_mul, ←
    pow_succ]
    have p11 : (landStep (landStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0)))).
    unpair.1.unpair.1
        = (landStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.unpair.1 /
    2 := by
      unfold landStep; rw [unpair_pair_fst, unpair_pair_fst]
    have p12 : (landStep (landStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0)))).
    unpair.1.unpair.2
        = (landStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.unpair.2 /
    2 := by
      unfold landStep; rw [unpair_pair_fst, unpair_pair_snd]
```

```
    have p21 : (landStep (landStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0)))).
    unpair.2.unpair.1
        = 2 * (landStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair
    .1 := by
      unfold landStep; rw [unpair_pair_snd, unpair_pair_fst]
    have p22 : (landStep (landStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0)))).
    unpair.2.unpair.2
        = (landStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.2
          + (landStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.1
            * lowAnd (landStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.
    unpair.1
                (landStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.
    unpair.2 := by
      unfold landStep; rw [unpair_pair_snd, unpair_pair_snd]
    refine ⟨?_, ?_, ?_, ?_⟩
    · rw [p11, hA, Nat.div_div_eq_div_mul, ← pow_succ]
    · rw [p12, hB, Nat.div_div_eq_div_mul, ← pow_succ]
    · rw [p21, hW, ← pow_succ']
    · rw [p22, hA, hB, hW, hdd, hdd', pow_succ, ← hAcc, land_low_rec (a / 2 ^ k) (b /
    2 ^ k)]
      ring

theorem mod_eq_sub_of_le_of_lt_two_mul {j s : ℕ} (h1 : s ≤ j) (h2 : j < 2 * s) :
    j % s = j - s := by
  have heq : j = (j - s) + s := by omega
  calc j % s = ((j - s) + s) % s := by rw [← heq]
    _ = (j - s) % s := Nat.add_mod_right _ _
    _ = j - s := Nat.mod_eq_of_lt (by omega)

def myDivPow2 (m ? : ℕ) : ℕ := Nat.unpaired (fun z n => n.rec z (fun _ ih => ih / 2))
    (Nat.pair m ?)

def myModPow2 (m s : ℕ) : ℕ := m - myDivPow2 m s * 2 ^ s

def myTestBit (m ? : ℕ) : ℕ := myDivPow2 m ? % 2

namespace primrec
open Domain.Recursive NeighborhoodSystem

theorem myDivPow2 : Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.
    myDivPow2 t.unpair.1 t.unpair.2) := by
  have hg : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2 / 2) :=
    primrec_div2.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  refine (Nat.Primrec.prec Nat.Primrec.id hg).of_eq fun t => ?_
  unfold _root_.DomainTheory.NeighbourhoodSystems.myDivPow2
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]

theorem myModPow2 : Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.
    myModPow2 t.unpair.1 t.unpair.2) := by
  have hpow : Nat.Primrec (fun t : ℕ => (2:ℕ) ^ t.unpair.2) := primrec_two_pow Nat.
    Primrec.right
  have hdiv : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    myDivPow2 t.unpair.1 t.unpair.2) := primrec.myDivPow2
  exact (primrec_sub₂ Nat.Primrec.left (primrec_mul₂ hdiv hpow)).of_eq fun t => rfl

theorem myTestBit : Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.
```

```
    myTestBit t.unpair.1 t.unpair.2) :=
  (primrec_mod2.comp primrec.myDivPow2).of_eq fun _ => rfl

end primrec
open Domain.Recursive NeighborhoodSystem

theorem myDivPow2_eq (m ? : ℕ) : myDivPow2 m ? = m / 2 ^ ? := by
  unfold myDivPow2
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]
  induction ? with
  | zero => simp
  | succ ? ih =>
    show (?.rec m (fun _ ih => ih / 2)) / 2 = m / 2 ^ (? + 1)
    rw [ih, Nat.div_div_eq_div_mul, ← pow_succ]

namespace myModPow2
open Domain.Recursive NeighborhoodSystem

theorem eq (m s : ℕ) : myModPow2 m s = m % 2 ^ s := by
  unfold myModPow2
  rw [myDivPow2_eq]
  have h : m / 2 ^ s * 2 ^ s + m % 2 ^ s = m := by
    rw [mul_comm]; exact Nat.div_add_mod m (2 ^ s)
  omega

end myModPow2
namespace myTestBit
open Domain.Recursive NeighborhoodSystem

theorem eq_one_iff (m ? : ℕ) : myTestBit m ? = 1 ↔ m.testBit ? = true := by
  unfold myTestBit
  rw [myDivPow2_eq, Nat.testBit_eq_decide_div_mod_eq, decide_eq_true_eq]

end myTestBit
namespace myModPow2
open Domain.Recursive NeighborhoodSystem

theorem lt (m s : ℕ) : myModPow2 m s < 2 ^ s := by
  rw [myModPow2.eq]; exact Nat.mod_lt m (Nat.two_pow_pos s)

end myModPow2
namespace levelSet
open Domain.Recursive NeighborhoodSystem

theorem myModPow2 (k x : ℕ) : levelSet k (_root_.DomainTheory.NeighbourhoodSystems.
    myModPow2 x (2 ^ k)) = levelSet k x := by
  ext n
  simp only [mem_levelSet, myModPow2.eq, Nat.testBit_mod_two_pow]
  have : n % 2 ^ k < 2 ^ k := Nat.mod_lt n (Nat.two_pow_pos k)
  simp [this]

end levelSet
open Domain.Recursive NeighborhoodSystem

def myLand (a b : ℕ) : ℕ :=
  (landStep^[a + b] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.2
```

```
namespace primrec
open Domain.Recursive NeighborhoodSystem

theorem myLand : Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.myLand
     t.unpair.1 t.unpair.2) := by
  have hbase : Nat.Primrec
       (fun z => Nat.pair (Nat.pair z.unpair.1 z.unpair.2) (Nat.pair 1 0)) :=
     (Nat.Primrec.left.pair Nat.Primrec.right).pair
       ((Nat.Primrec.const 1).pair (Nat.Primrec.const 0))
  have hstep : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.landStep
     w.unpair.2.unpair.2) :=
    primrec.landStep.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hprec := Nat.Primrec.prec hbase hstep
  have hcount : Nat.Primrec (fun t => t.unpair.1 + t.unpair.2) :=
    primrec_add₂ Nat.Primrec.left Nat.Primrec.right
  refine ((Nat.Primrec.right.comp Nat.Primrec.right).comp
    (hprec.comp (primrec_id.pair hcount))).of_eq fun t => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]
  rw [rec_const_iterate]
  rfl

end primrec
open Domain.Recursive NeighborhoodSystem

theorem myLand_eq_land (a b : ℕ) : myLand a b = a &&& b := by
  unfold myLand
  obtain ⟨_, _, _, hAcc⟩ := landStep_iter_spec a b (a + b)
  have ha0 : a / 2 ^ (a + b) = 0 :=
    Nat.div_eq_of_lt (Nat.lt_of_lt_of_le Nat.lt_two_pow_self (Nat.pow_le_pow_right (by
     decide)
       (Nat.le_add_right a b)))
  have hb0 : b / 2 ^ (a + b) = 0 :=
    Nat.div_eq_of_lt (Nat.lt_of_lt_of_le Nat.lt_two_pow_self (Nat.pow_le_pow_right (by
     decide)
       (Nat.le_add_left b a)))
  rw [ha0, hb0] at hAcc
  simpa using hAcc

def levelSetNonemptyBody (t : ℕ) : ℕ := myTestBit t.unpair.2 t.unpair.1

def myLevelSetNonempty (k m : ℕ) : ℕ := bExistsFn levelSetNonemptyBody m (2 ^ k)

def canonIdx (c : ℕ) : ℕ :=
  selectFn (myLevelSetNonempty c.unpair.1 c.unpair.2) c (Nat.pair 0 1)

namespace myLevelSetNonempty
open Domain.Recursive NeighborhoodSystem

theorem le_one (k m : ℕ) : myLevelSetNonempty k m ≤ 1 :=
  bExistsFn_le_one _ _ _

theorem eq_one_iff (k m : ℕ) :
    myLevelSetNonempty k m = 1 ↔ (levelSet k m).Nonempty := by
  unfold myLevelSetNonempty
  rw [bExistsFn_eq_one_iff, levelSet.nonempty_iff]
```

```
  simp only [levelSetNonemptyBody, unpair_pair_fst, unpair_pair_snd, myTestBit.
    eq_one_iff]

end myLevelSetNonempty
namespace canonIdx
open Domain.Recursive NeighborhoodSystem

theorem eq_master_of_empty {c : ℕ} (h : levelSet c.unpair.1 c.unpair.2 = ∅) :
    canonIdx c = Nat.pair 0 1 := by
  unfold canonIdx
  have hle := myLevelSetNonempty.le_one c.unpair.1 c.unpair.2
  have hne1 : myLevelSetNonempty c.unpair.1 c.unpair.2 = 1 := fun heq =>
    ((myLevelSetNonempty.eq_one_iff _ _).mp heq).ne_empty h
  have h0 : myLevelSetNonempty c.unpair.1 c.unpair.2 = 0 := by omega
  rw [h0, selectFn_zero]

theorem eq_self_of_nonempty {c : ℕ} (h : (levelSet c.unpair.1 c.unpair.2).Nonempty) :
    canonIdx c = c := by
  unfold canonIdx
  rw [(myLevelSetNonempty.eq_one_iff _ _).mpr h, selectFn_one]

end canonIdx
namespace levelSet
open Domain.Recursive NeighborhoodSystem

theorem canonIdx_nonempty (c : ℕ) :
    (levelSet (canonIdx c).unpair.1 (canonIdx c).unpair.2).Nonempty := by
  by_cases h : (levelSet c.unpair.1 c.unpair.2).Nonempty
  · rwa [canonIdx.eq_self_of_nonempty h]
  · rw [canonIdx.eq_master_of_empty (Set.not_nonempty_iff_eq_empty.mp h),
    unpair_pair_fst,
      unpair_pair_snd, levelSet.zero_one]
    exact Set.univ_nonempty

end levelSet
namespace canonIdx
open Domain.Recursive NeighborhoodSystem

theorem idempotent (c : ℕ) : canonIdx (canonIdx c) = canonIdx c :=
  canonIdx.eq_self_of_nonempty (levelSet.canonIdx_nonempty c)

end canonIdx
namespace primrec
open Domain.Recursive NeighborhoodSystem

theorem levelSetNonemptyBody : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.
    levelSetNonemptyBody :=
  (primrec.myTestBit.comp (Nat.Primrec.right.pair Nat.Primrec.left)).of_eq fun t => by
    simp only [_root_.DomainTheory.NeighbourhoodSystems.levelSetNonemptyBody,
    unpair_pair_fst, unpair_pair_snd]

theorem myLevelSetNonempty :
    Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.myLevelSetNonempty
    t.unpair.1 t.unpair.2) := by
  have hbe : Nat.Primrec (fun t : ℕ => bExistsFn _root_.DomainTheory.
    NeighbourhoodSystems.levelSetNonemptyBody t.unpair.1 t.unpair.2) :=
```

```
    primrec_bExistsFn primrec.levelSetNonemptyBody
  have hpow : Nat.Primrec (fun t : ℕ => (2:ℕ) ^ t.unpair.1) := primrec_two_pow Nat.
    Primrec.left
  exact (hbe.comp (Nat.Primrec.right.pair hpow)).of_eq fun t => by
    simp only [_root_.DomainTheory.NeighbourhoodSystems.myLevelSetNonempty,
    unpair_pair_fst, unpair_pair_snd]

theorem canonIdx : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.canonIdx := by
  have hne : Nat.Primrec (fun c => _root_.DomainTheory.NeighbourhoodSystems.
    myLevelSetNonempty c.unpair.1 c.unpair.2) :=
    primrec.myLevelSetNonempty
  exact (primrec_selectFn hne primrec_id (Nat.Primrec.const (Nat.pair 0 1))).of_eq fun
     _ => rfl

end primrec
open Domain.Recursive NeighborhoodSystem

def VX (c : ℕ) : Set ℕ := levelSet (canonIdx c).unpair.1 (canonIdx c).unpair.2

theorem VX_VmasterIdx : VX VmasterIdx = V.master := by
  have hne : (levelSet (Nat.pair 0 1 : ℕ).unpair.1 (Nat.pair 0 1 : ℕ).unpair.2).
    Nonempty := by
    rw [unpair_pair_fst, unpair_pair_snd, levelSet.zero_one]; exact Set.univ_nonempty
  unfold VX VmasterIdx
  rw [canonIdx.eq_self_of_nonempty hne, unpair_pair_fst, unpair_pair_snd, levelSet.
    zero_one]
  rfl

theorem V.surj_VX : ∀ {Y : Set ℕ}, V.mem Y → ∃ n, VX n = Y := by
  rintro Y ⟨k, m, rfl, hne⟩
  refine ⟨Nat.pair k m, ?_⟩
  have hne' : (levelSet (Nat.pair k m).unpair.1 (Nat.pair k m).unpair.2).Nonempty :=
    by
    rwa [unpair_pair_fst, unpair_pair_snd]
  unfold VX
  rw [canonIdx.eq_self_of_nonempty hne', unpair_pair_fst, unpair_pair_snd]

theorem VX_nonempty (c : ℕ) : (VX c).Nonempty := levelSet.canonIdx_nonempty c

theorem V.mem_VX (c : ℕ) : V.mem (VX c) :=
  ⟨(canonIdx c).unpair.1, (canonIdx c).unpair.2, rfl, levelSet.canonIdx_nonempty c⟩

theorem VX_canonIdx (c : ℕ) : VX (canonIdx c) = VX c := by unfold VX; rw [canonIdx.
    idempotent]

end DomainTheory.NeighbourhoodSystems
```

Vinter.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.VX

@[expose] public section
```

```
namespace DomainTheory.NeighbourhoodSystems

def myUpsampleStep (k m : ℕ) : ℕ :=
  2 ^ (2 ^ k) * myModPow2 m (2 ^ k) + myModPow2 m (2 ^ k)

def myUpsampleJointStep (s : ℕ) : ℕ :=
  Nat.pair (s.unpair.1 + 1) (myUpsampleStep s.unpair.1 s.unpair.2)

namespace myUpsampleJointStep
open Domain.Recursive NeighborhoodSystem

theorem eq (s : ℕ) :
    myUpsampleJointStep s = Nat.pair (s.unpair.1 + 1) (myUpsampleStep s.unpair.1 s.
    unpair.2) := rfl

theorem iter_level (k m d : ℕ) :
    (myUpsampleJointStep^[d] (Nat.pair k m)).unpair.1 = k + d := by
  induction d with
  | zero => simp
  | succ d ih =>
    rw [Function.iterate_succ_apply', myUpsampleJointStep.eq, unpair_pair_fst, ih]
    omega

end myUpsampleJointStep
namespace levelSet
open Domain.Recursive NeighborhoodSystem

theorem myUpsampleStep (k m : ℕ) :
    levelSet (k + 1) (_root_.DomainTheory.NeighbourhoodSystems.myUpsampleStep k m) =
    levelSet k m := by
  ext n
  simp only [mem_levelSet]
  have hlt : _root_.DomainTheory.NeighbourhoodSystems.myModPow2 m (2 ^ k) < 2 ^ (2 ^ k
    ) := myModPow2.lt m (2 ^ k)
  have hstep : _root_.DomainTheory.NeighbourhoodSystems.myUpsampleStep k m
      = 2 ^ (2 ^ k) * _root_.DomainTheory.NeighbourhoodSystems.myModPow2 m (2 ^ k) +
    _root_.DomainTheory.NeighbourhoodSystems.myModPow2 m (2 ^ k) := rfl
  rw [hstep, Nat.testBit_two_pow_mul_add _ hlt]
  have hmm : n % 2 ^ k = n % 2 ^ (k + 1) % 2 ^ k :=
    (Nat.mod_mod_of_dvd n (pow_dvd_pow 2 (Nat.le_succ k))).symm
  have hjlt : n % 2 ^ (k + 1) < 2 ^ (k + 1) := Nat.mod_lt n (Nat.two_pow_pos (k + 1))
  have h2 : (2:ℕ) ^ (k + 1) = 2 * 2 ^ k := by rw [pow_succ]; ring
  by_cases hcase : n % 2 ^ (k + 1) < 2 ^ k
  · rw [ite_eq_left hcase, myModPow2.eq, Nat.testBit_mod_two_pow, decide_eq_true_iff.
    mpr hcase,
      Bool.true_and, hmm, Nat.mod_eq_of_lt hcase]
  · have hge : 2 ^ k ≤ n % 2 ^ (k + 1) := Nat.le_of_not_lt hcase
    have hsub : n % 2 ^ (k + 1) - 2 ^ k < 2 ^ k := by omega
    rw [ite_eq_right hcase, myModPow2.eq, Nat.testBit_mod_two_pow, decide_eq_true_iff.
    mpr hsub,
      Bool.true_and, hmm, mod_eq_sub_of_le_of_lt_two_mul hge (h2 ▸ hjlt)]

end levelSet
namespace myUpsampleJointStep
open Domain.Recursive NeighborhoodSystem
```

```
theorem iter_levelSet (k m d : ℕ) :
    levelSet (k + d) ((myUpsampleJointStep^[d] (Nat.pair k m)).unpair.2) = levelSet k
    m := by
  induction d with
  | zero => simp
  | succ d ih =>
    rw [Function.iterate_succ_apply', myUpsampleJointStep.eq, unpair_pair_snd,
      myUpsampleJointStep.iter_level, show k + (d + 1) = (k + d) + 1 from by omega,
      levelSet.myUpsampleStep, ih]

end myUpsampleJointStep
namespace primrec
open Domain.Recursive NeighborhoodSystem

theorem myUpsampleStep : Nat.Primrec (fun t => _root_.DomainTheory.
    NeighbourhoodSystems.myUpsampleStep t.unpair.1 t.unpair.2) := by
  have hs : Nat.Primrec (fun t : ℕ => (2:ℕ) ^ t.unpair.1) := primrec_two_pow Nat.
    Primrec.left
  have hm' : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    myModPow2 t.unpair.2 (2 ^ t.unpair.1)) :=
    (primrec.myModPow2.comp (Nat.Primrec.right.pair hs)).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have h2s : Nat.Primrec (fun t : ℕ => (2:ℕ) ^ (2 ^ t.unpair.1)) := primrec_two_pow hs
  exact (primrec_add₂ (primrec_mul₂ h2s hm') hm').of_eq fun t => rfl

theorem myUpsampleJointStep : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.
    myUpsampleJointStep := by
  have hstep : Nat.Primrec (fun s : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    myUpsampleStep s.unpair.1 s.unpair.2) :=
    primrec.myUpsampleStep
  exact ((Nat.Primrec.succ.comp Nat.Primrec.left).pair hstep).of_eq fun _ => rfl

end primrec
open Domain.Recursive NeighborhoodSystem

def myUpsample (k k' m : ℕ) : ℕ :=
  myModPow2 ((myUpsampleJointStep^[k' - k] (Nat.pair k m)).unpair.2) (2 ^ k')

namespace levelSet
open Domain.Recursive NeighborhoodSystem

theorem myUpsample {k k' : ℕ} (hk : k ≤ k') (m : ℕ) :
    levelSet k' (_root_.DomainTheory.NeighbourhoodSystems.myUpsample k k' m) =
    levelSet k m := by
  unfold _root_.DomainTheory.NeighbourhoodSystems.myUpsample
  rw [levelSet.myModPow2]
  have := myUpsampleJointStep.iter_levelSet k m (k' - k)
  rwa [show k + (k' - k) = k' from by omega] at this

theorem myInter (k1 m1 k2 m2 : ℕ) :
    levelSet k1 m1 ∩ levelSet k2 m2
      = levelSet (max k1 k2) (myLand (_root_.DomainTheory.NeighbourhoodSystems.
    myUpsample k1 (max k1 k2) m1) (_root_.DomainTheory.NeighbourhoodSystems.myUpsample
    k2 (max k1 k2) m2)) := by
  conv_lhs => rw [← levelSet.myUpsample (Nat.le_max_left k1 k2) m1,
    ← levelSet.myUpsample (Nat.le_max_right k1 k2) m2]
```

```
  rw [levelSet.inter_same_level, myLand_eq_land]

end levelSet
namespace primrec
open Domain.Recursive NeighborhoodSystem

theorem myUpsample :
    Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.myUpsample t.unpair
    .1 t.unpair.2.unpair.1 t.unpair.2.unpair.2) := by
  have hstep : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.
    myUpsampleJointStep w.unpair.2.unpair.2) :=
    primrec.myUpsampleJointStep.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hprec := Nat.Primrec.prec primrec_id hstep
  have hz : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.1 t.unpair.2.unpair.2) :=
    Nat.Primrec.left.pair (Nat.Primrec.right.comp Nat.Primrec.right)
  have hn : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1 - t.unpair.1) :=
    primrec_sub₂ (Nat.Primrec.left.comp Nat.Primrec.right) Nat.Primrec.left
  have hmodpow : Nat.Primrec (fun t : ℕ => (2:ℕ) ^ t.unpair.2.unpair.1) :=
    primrec_two_pow (Nat.Primrec.left.comp Nat.Primrec.right)
  refine (primrec.myModPow2.comp ((Nat.Primrec.right.comp (hprec.comp (hz.pair hn))).
    pair
    hmodpow)).of_eq fun t => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]
  unfold _root_.DomainTheory.NeighbourhoodSystems.myUpsample
  rw [rec_const_iterate]

end primrec
open Domain.Recursive NeighborhoodSystem

def VinterRaw (n m : ℕ) : ℕ :=
  Nat.pair (max (canonIdx n).unpair.1 (canonIdx m).unpair.1)
    (myLand
      (myUpsample (canonIdx n).unpair.1 (max (canonIdx n).unpair.1 (canonIdx m).unpair
    .1)
        (canonIdx n).unpair.2)
      (myUpsample (canonIdx m).unpair.1 (max (canonIdx n).unpair.1 (canonIdx m).unpair
    .1)
        (canonIdx m).unpair.2))

namespace levelSet
open Domain.Recursive NeighborhoodSystem

theorem VinterRaw (n m : ℕ) :
    levelSet (_root_.DomainTheory.NeighbourhoodSystems.VinterRaw n m).unpair.1 (_root_
    .DomainTheory.NeighbourhoodSystems.VinterRaw n m).unpair.2 = VX n ∩ VX m := by
  unfold _root_.DomainTheory.NeighbourhoodSystems.VinterRaw
  rw [unpair_pair_fst, unpair_pair_snd]
  exact (levelSet.myInter (canonIdx n).unpair.1 (canonIdx n).unpair.2
    (canonIdx m).unpair.1 (canonIdx m).unpair.2).symm

end levelSet
namespace primrec
open Domain.Recursive NeighborhoodSystem

theorem VinterRaw : Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.
    VinterRaw t.unpair.1 t.unpair.2) := by
```

```
  have hcn : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.1) := primrec.canonIdx.comp Nat.Primrec.left
  have hcm : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.2) := primrec.canonIdx.comp Nat.Primrec.right
  have hk1 : Nat.Primrec (fun t : ℕ => (_root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.1).unpair.1) := Nat.Primrec.left.comp hcn
  have hm1 : Nat.Primrec (fun t : ℕ => (_root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.1).unpair.2) := Nat.Primrec.right.comp hcn
  have hk2 : Nat.Primrec (fun t : ℕ => (_root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.2).unpair.1) := Nat.Primrec.left.comp hcm
  have hm2 : Nat.Primrec (fun t : ℕ => (_root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.2).unpair.2) := Nat.Primrec.right.comp hcm
  have hkJ : Nat.Primrec (fun t : ℕ => max (_root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.1).unpair.1 (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.
    unpair.2).unpair.1) :=
    primrec_max hk1 hk2
  have hup1 : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    myUpsample (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1
      (max (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1 (
    _root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1)
      (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.2) :=
     (primrec.myUpsample.comp (hk1.pair (hkJ.pair hm1))).of_eq fun t => by
       simp only [unpair_pair_fst, unpair_pair_snd]
  have hup2 : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    myUpsample (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1
      (max (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1 (
    _root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1)
      (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.2) :=
     (primrec.myUpsample.comp (hk2.pair (hkJ.pair hm2))).of_eq fun t => by
       simp only [unpair_pair_fst, unpair_pair_snd]
  have hland : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    myLand
      (_root_.DomainTheory.NeighbourhoodSystems.myUpsample (_root_.DomainTheory.
    NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1
        (max (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1 (
    _root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1) (_root_.
    DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.2)
      (_root_.DomainTheory.NeighbourhoodSystems.myUpsample (_root_.DomainTheory.
    NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1
        (max (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1 (
    _root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1) (_root_.
    DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.2)) :=
     (primrec.myLand.comp (hup1.pair hup2)).of_eq fun t => by
       simp only [unpair_pair_fst, unpair_pair_snd]
  exact (hkJ.pair hland).of_eq fun _ => rfl

end primrec
open Domain.Recursive NeighborhoodSystem

def Vinter (n m : ℕ) : ℕ := canonIdx (VinterRaw n m)

namespace primrec
open Domain.Recursive NeighborhoodSystem

theorem Vinter : Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.Vinter
     t.unpair.1 t.unpair.2) :=
```

```
  (primrec.canonIdx.comp primrec.VinterRaw).of_eq fun _ => rfl

end primrec
open Domain.Recursive NeighborhoodSystem

theorem Vcons_iff_nonempty_inter (n m : ℕ) :
    (∃ k, VX k ⊆ VX n ∩ VX m) ↔ (VX n ∩ VX m).Nonempty := by
  constructor
  · rintro ⟨k, hk⟩
    exact (VX_nonempty k).mono hk
  · intro hne
    rw [← levelSet.VinterRaw] at hne
    have hVmem : V.mem (VX n ∩ VX m) := by
      rw [← levelSet.VinterRaw]
      exact ⟨(VinterRaw n m).unpair.1, (VinterRaw n m).unpair.2, rfl, hne⟩
    obtain ⟨k, hk⟩ := V.surj_VX hVmem
    exact ⟨k, by rw [hk]⟩

theorem Vinter_spec {n m : ℕ} (h : ∃ k, VX k ⊆ VX n ∩ VX m) : VX (Vinter n m) = VX n ∩
    VX m := by
  have hne : (levelSet (VinterRaw n m).unpair.1 (VinterRaw n m).unpair.2).Nonempty :=
    by
    rw [levelSet.VinterRaw]; exact (Vcons_iff_nonempty_inter n m).mp h
  unfold Vinter
  rw [VX_canonIdx]
  show levelSet (canonIdx (VinterRaw n m)).unpair.1 (canonIdx (VinterRaw n m)).unpair
    .2 = VX n ∩ VX m
  rw [canonIdx.eq_self_of_nonempty hne, levelSet.VinterRaw]

theorem myUpsample_lt (k k' m : ℕ) : myUpsample k k' m < 2 ^ (2 ^ k') := myModPow2.lt
    _ _

namespace levelSet
open Domain.Recursive NeighborhoodSystem

theorem eq_iff_myUpsample_eq (k1 m1 k2 m2 : ℕ) :
    levelSet k1 m1 = levelSet k2 m2 ↔
      _root_.DomainTheory.NeighbourhoodSystems.myUpsample k1 (max k1 k2) m1 = _root_.
    DomainTheory.NeighbourhoodSystems.myUpsample k2 (max k1 k2) m2 := by
  constructor
  · intro h
    exact levelSet.inj_of_lt (myUpsample_lt _ _ _) (myUpsample_lt _ _ _)
      (by rw [levelSet.myUpsample (Nat.le_max_left k1 k2),
        levelSet.myUpsample (Nat.le_max_right k1 k2), h])
  · intro h
    rw [← levelSet.myUpsample (Nat.le_max_left k1 k2) m1,
      ← levelSet.myUpsample (Nat.le_max_right k1 k2) m2, h]

end levelSet
open Domain.Recursive NeighborhoodSystem

theorem V.cons_computable : RecDecidable₂ (fun n m => ∃ k, VX k ⊆ VX n ∩ VX m) := by
  have hvr : Nat.Primrec (fun t : ℕ => VinterRaw t.unpair.1 t.unpair.2) := primrec.
    VinterRaw
  have hfprim : Nat.Primrec (fun t : ℕ => myLevelSetNonempty (VinterRaw t.unpair.1 t.
    unpair.2).unpair.1
```

```
      (VinterRaw t.unpair.1 t.unpair.2).unpair.2) :=
    (primrec.myLevelSetNonempty.comp ((Nat.Primrec.left.comp hvr).pair
      (Nat.Primrec.right.comp hvr))).of_eq fun t => by simp only [unpair_pair_fst,
    unpair_pair_snd]
  refine RecDecidable₂.of_paired_zero_one_char hfprim ?_ ?_
  · intro t
    have := myLevelSetNonempty.le_one (VinterRaw t.unpair.1 t.unpair.2).unpair.1
      (VinterRaw t.unpair.1 t.unpair.2).unpair.2
    omega
  · intro n m
    rw [unpair_pair_fst, unpair_pair_snd, Vcons_iff_nonempty_inter, ← levelSet.
    VinterRaw,
      myLevelSetNonempty.eq_one_iff]

theorem V.interEq_computable : RecDecidable₃ (fun n m k => VX n ∩ VX m = VX k) := by
  unfold RecDecidable₃
  have hvr : Nat.Primrec (fun t : ℕ => VinterRaw t.unpair.1 t.unpair.2.unpair.1) :=
    (primrec.VinterRaw.comp (Nat.Primrec.left.pair
      (Nat.Primrec.left.comp Nat.Primrec.right))).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hvrK : Nat.Primrec (fun t : ℕ => (VinterRaw t.unpair.1 t.unpair.2.unpair.1).
    unpair.1) :=
    Nat.Primrec.left.comp hvr
  have hvrM : Nat.Primrec (fun t : ℕ => (VinterRaw t.unpair.1 t.unpair.2.unpair.1).
    unpair.2) :=
    Nat.Primrec.right.comp hvr
  have hck : Nat.Primrec (fun t : ℕ => canonIdx t.unpair.2.unpair.2) :=
    primrec.canonIdx.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hckK : Nat.Primrec (fun t : ℕ => (canonIdx t.unpair.2.unpair.2).unpair.1) :=
    Nat.Primrec.left.comp hck
  have hckM : Nat.Primrec (fun t : ℕ => (canonIdx t.unpair.2.unpair.2).unpair.2) :=
    Nat.Primrec.right.comp hck
  have hkJ : Nat.Primrec (fun t : ℕ =>
      max (VinterRaw t.unpair.1 t.unpair.2.unpair.1).unpair.1 (canonIdx t.unpair.2.
    unpair.2).unpair.1) :=
    primrec_max hvrK hckK
  have hLHS : Nat.Primrec (fun t : ℕ => myUpsample (VinterRaw t.unpair.1 t.unpair.2.
    unpair.1).unpair.1
      (max (VinterRaw t.unpair.1 t.unpair.2.unpair.1).unpair.1 (canonIdx t.unpair.2.
    unpair.2).unpair.1)
      (VinterRaw t.unpair.1 t.unpair.2.unpair.1).unpair.2) :=
    (primrec.myUpsample.comp (hvrK.pair (hkJ.pair hvrM))).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hRHS : Nat.Primrec (fun t : ℕ => myUpsample (canonIdx t.unpair.2.unpair.2).
    unpair.1
      (max (VinterRaw t.unpair.1 t.unpair.2.unpair.1).unpair.1 (canonIdx t.unpair.2.
    unpair.2).unpair.1)
      (canonIdx t.unpair.2.unpair.2).unpair.2) :=
    (primrec.myUpsample.comp (hckK.pair (hkJ.pair hckM))).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  refine RecDecidable.of_iff (fun t => ?_) (RecDecidable.natEq hLHS hRHS)
  dsimp only
  rw [← levelSet.VinterRaw, ← levelSet.eq_iff_myUpsample_eq]
  rfl

def VComputablePresentation : ComputablePresentation V where
```

```
  X := VX
  mem_X := V.mem_VX
  surj := V.surj_VX
  interEq_computable := V.interEq_computable
  cons_computable := V.cons_computable
  inter := Vinter
  inter_primrec := primrec.Vinter
  inter_spec := Vinter_spec
  masterIdx := VmasterIdx
  masterIdx_spec := VX_VmasterIdx

theorem V.isEffectivelyGiven : V.IsEffectivelyGiven := ⟨VComputablePresentation⟩

end DomainTheory.NeighbourhoodSystems
```

minLevel.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.Vinter

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

namespace myTestBit
open Domain.Recursive NeighborhoodSystem

theorem le_one (m ? : ℕ) : myTestBit m ? ≤ 1 := by
  unfold myTestBit
  rcases Nat.mod_two_eq_zero_or_one (myDivPow2 m ?) with h | h <;> omega

end myTestBit
open Domain.Recursive

def isPeriodicMask (k j m : ℕ) : ℕ :=
  isZero ((myUpsample j k (myModPow2 m (2 ^ j)) - myModPow2 m (2 ^ k)) +
    (myModPow2 m (2 ^ k) - myUpsample j k (myModPow2 m (2 ^ j))))

def minLevel (k m : ℕ) : ℕ :=
  Nat.rec (motive := fun _ => ℕ) 0
    (fun i ih => selectFn (isZero (i - ih)) (selectFn (isPeriodicMask k i m) i (i + 1)
    ) ih) (k + 1)

def minLevelFold (k m N : ℕ) : ℕ :=
  Nat.rec (motive := fun _ => ℕ) 0
    (fun i ih => selectFn (isZero (i - ih)) (selectFn (isPeriodicMask k i m) i (i + 1)
    ) ih) N

def minMask (k m : ℕ) : ℕ := myModPow2 m (2 ^ minLevel k m)

theorem isPeriodicMask_le_one (k j m : ℕ) : isPeriodicMask k j m ≤ 1 := isZero_le_one
    _

theorem isPeriodicMask_eq_one_iff (k j m : ℕ) :
```

```
    isPeriodicMask k j m = 1 ↔ myUpsample j k (myModPow2 m (2 ^ j)) = myModPow2 m (2 ^
     k) := by
  unfold isPeriodicMask
  rw [isZero_eq_one_iff]
  omega

theorem isPeriodicMask_iff {k j m : ℕ} (hj : j ≤ k) :
    isPeriodicMask k j m = 1 ↔ levelSet k m = levelSet j m := by
  rw [isPeriodicMask_eq_one_iff]
  constructor
  · intro h
    have h1 :
        levelSet k (myUpsample j k (myModPow2 m (2 ^ j))) = levelSet k (myModPow2 m (2
     ^ k)) := by
      rw [h]
    rw [levelSet.myUpsample hj, levelSet.myModPow2, levelSet.myModPow2] at h1
    exact h1.symm
  · intro h
    apply levelSet.inj_of_lt (myUpsample_lt _ _ _) (myModPow2.lt _ _)
    rw [levelSet.myUpsample hj, levelSet.myModPow2, levelSet.myModPow2]
    exact h.symm

theorem isPeriodicMask_self (k m : ℕ) : isPeriodicMask k k m = 1 := by
  rw [isPeriodicMask_eq_one_iff]
  unfold myUpsample
  simp only [Nat.sub_self, Function.iterate_zero, id_eq, unpair_pair_snd]
  rw [myModPow2.eq, myModPow2.eq, Nat.mod_eq_of_lt (Nat.mod_lt m (Nat.two_pow_pos (2 ^
     k)))]

theorem minLevel_eq_fold (k m : ℕ) : minLevel k m = minLevelFold k m (k + 1) := rfl

private theorem minLevelFold_succ (k m N : ℕ) :
    minLevelFold k m (N + 1) =
      selectFn (isZero (N - minLevelFold k m N))
        (selectFn (isPeriodicMask k N m) N (N + 1)) (minLevelFold k m N) := rfl

private theorem minLevelFold_spec (k m N : ℕ) :
    (minLevelFold k m N < N ∧ isPeriodicMask k (minLevelFold k m N) m = 1 ∧
        ∀ j < minLevelFold k m N, isPeriodicMask k j m = 1) ∨
      (minLevelFold k m N = N ∧ ∀ j < N, isPeriodicMask k j m = 1) := by
  induction N with
  | zero => exact Or.inr ⟨rfl, fun j hj => absurd hj (Nat.not_lt_zero j)⟩
  | succ i ih =>
    rw [minLevelFold_succ]
    rcases ih with ⟨hlt, htrue, hmin⟩ | ⟨heq, hall⟩
    · have hne : i - minLevelFold k m i = 0 := by omega
      have hz : isZero (i - minLevelFold k m i) = 0 := by
        have hle := isZero_le_one (i - minLevelFold k m i)
        rcases (show isZero (i - minLevelFold k m i) = 0 ∨
            isZero (i - minLevelFold k m i) = 1 by omega) with h | h
        · exact h
        · exact absurd ((isZero_eq_one_iff _).mp h) hne
      rw [hz, selectFn_zero]
      exact Or.inl ⟨by omega, htrue, hmin⟩
    · have hz : isZero (i - minLevelFold k m i) = 1 :=
        (isZero_eq_one_iff _).mpr (by omega)
```

```
      rw [hz, selectFn_one]
      have hle : isPeriodicMask k i m ≤ 1 := isPeriodicMask_le_one k i m
      rcases (show isPeriodicMask k i m = 0 ∨ isPeriodicMask k i m = 1 by omega) with
    hbit | hbit
      · rw [hbit, selectFn_zero]
        refine Or.inr ⟨by omega, fun j hj => ?_⟩
        rcases (show j < i ∨ j = i by omega) with hlt' | heq'
        · exact hall j hlt'
        · subst heq'; omega
      · rw [hbit, selectFn_one]
        exact Or.inl ⟨by omega, hbit, fun j hj => hall j (by omega)⟩

theorem minLevel_le (k m : ℕ) : minLevel k m ≤ k := by
  rw [minLevel_eq_fold]
  rcases minLevelFold_spec k m (k + 1) with ⟨h, -, -⟩ | ⟨heq, hall⟩
  · omega
  · exact absurd (isPeriodicMask_self k m) (hall k (by omega))

theorem minLevel_isPeriodicMask (k m : ℕ) : isPeriodicMask k (minLevel k m) m = 1 :=
    by
  rw [minLevel_eq_fold]
  rcases minLevelFold_spec k m (k + 1) with ⟨-, htrue, -⟩ | ⟨heq, hall⟩
  · exact htrue
  · exact absurd (isPeriodicMask_self k m) (hall k (by omega))

theorem minLevel_min {k m j : ℕ} (hj : j < minLevel k m) : isPeriodicMask k j m = 1 :=
     by
  revert hj
  rw [minLevel_eq_fold]
  intro hj
  rcases minLevelFold_spec k m (k + 1) with ⟨-, -, hmin⟩ | ⟨heq, hall⟩
  · exact hmin j hj
  · exact hall j (heq ▸ hj)

theorem levelSet_minLevel (k m : ℕ) : levelSet (minLevel k m) (minMask k m) = levelSet
     k m := by
  have h := (isPeriodicMask_iff (minLevel_le k m)).1 (minLevel_isPeriodicMask k m)
  show levelSet (minLevel k m) (myModPow2 m (2 ^ minLevel k m)) = levelSet k m
  rw [levelSet.myModPow2, h]

theorem levelSet_presentable_imp_self {k j m m' : ℕ} (hj : j ≤ k)
    (h : levelSet j m' = levelSet k m) : levelSet k m = levelSet j m := by
  have hraw : ∀ i, i < 2 ^ k → m.testBit i = m.testBit (i % 2 ^ j) := by
    intro i hi
    have hik : i % 2 ^ j < 2 ^ k :=
      lt_of_lt_of_le (Nat.mod_lt i (Nat.two_pow_pos j))
        (Nat.pow_le_pow_right (by norm_num) hj)
    have e1 : m'.testBit (i % 2 ^ j) = m.testBit (i % 2 ^ k) := by
      have hiff := Set.ext_iff.mp h i
      simp only [mem_levelSet] at hiff
      cases ha : m'.testBit (i % 2 ^ j) <;> cases hb : m.testBit (i % 2 ^ k) <;>
        simp_all
    have e2 : m'.testBit ((i % 2 ^ j) % 2 ^ j) = m.testBit ((i % 2 ^ j) % 2 ^ k) := by
      have hiff := Set.ext_iff.mp h (i % 2 ^ j)
      simp only [mem_levelSet] at hiff
      cases ha : m'.testBit ((i % 2 ^ j) % 2 ^ j) <;> cases hb : m.testBit ((i % 2 ^ j
```

```
    ) % 2 ^ k) <;>
        simp_all
    rw [Nat.mod_eq_of_lt hi] at e1
    rw [Nat.mod_eq_of_lt (Nat.mod_lt i (Nat.two_pow_pos j)), Nat.mod_eq_of_lt hik] at
    e2
    rw [← e1, ← e2]
  ext n
  simp only [mem_levelSet]
  have := hraw (n % 2 ^ k) (Nat.mod_lt n (Nat.two_pow_pos k))
  rw [this, Nat.mod_mod_of_dvd n (pow_dvd_pow 2 hj)]

theorem isPeriodicMask_of_presentable {k j m : ℕ} (hj : j ≤ k) {m' : ℕ}
    (h : levelSet j m' = levelSet k m) : isPeriodicMask k j m = 1 :=
  (isPeriodicMask_iff hj).2 (levelSet_presentable_imp_self hj h)

theorem minLevel_eq {k₁ m₁ k₂ m₂ : ℕ} (h : levelSet k₁ m₁ = levelSet k₂ m₂) :
    minLevel k₁ m₁ = minLevel k₂ m₂ := by
  by_contra hne
  rcases lt_or_gt_of_ne hne with hlt | hlt
  · have hpres : levelSet (minLevel k₁ m₁) (minMask k₁ m₁) = levelSet k₂ m₂ := by
      rw [levelSet_minLevel]; exact h
    have hj : minLevel k₁ m₁ ≤ k₂ := le_trans (le_of_lt hlt) (minLevel_le k₂ m₂)
    exact minLevel_min (k := k₂) (m := m₂) (j := minLevel k₁ m₁) hlt
      (isPeriodicMask_of_presentable hj hpres)
  · have hpres : levelSet (minLevel k₂ m₂) (minMask k₂ m₂) = levelSet k₁ m₁ := by
      rw [levelSet_minLevel]; exact h.symm
    have hj : minLevel k₂ m₂ ≤ k₁ := le_trans (le_of_lt hlt) (minLevel_le k₁ m₁)
    exact minLevel_min (k := k₁) (m := m₁) (j := minLevel k₂ m₂) hlt
      (isPeriodicMask_of_presentable hj hpres)

theorem minMask_eq {k₁ m₁ k₂ m₂ : ℕ} (h : levelSet k₁ m₁ = levelSet k₂ m₂) :
    minMask k₁ m₁ = minMask k₂ m₂ := by
  have hlvl := minLevel_eq h
  have hsets : levelSet (minLevel k₁ m₁) (minMask k₁ m₁) = levelSet (minLevel k₁ m₁) (
    minMask k₂ m₂) := by
    rw [levelSet_minLevel, hlvl, levelSet_minLevel, h]
  have hb1 : minMask k₁ m₁ < 2 ^ (2 ^ minLevel k₁ m₁) := myModPow2.lt _ _
  have hb2 : minMask k₂ m₂ < 2 ^ (2 ^ minLevel k₁ m₁) := hlvl ▸ myModPow2.lt _ _
  exact levelSet.inj_of_lt hb1 hb2 hsets

theorem minLevel_unique {k₁ m₁ k₂ m₂ : ℕ} (h : levelSet k₁ m₁ = levelSet k₂ m₂) :
    minLevel k₁ m₁ = minLevel k₂ m₂ ∧ minMask k₁ m₁ = minMask k₂ m₂ :=
  ⟨minLevel_eq h, minMask_eq h⟩

theorem primrec_isPeriodicMask :
    Nat.Primrec (fun t => isPeriodicMask t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.
    unpair.2) := by
  have hk : Nat.Primrec (fun t : ℕ => t.unpair.1) := Nat.Primrec.left
  have hj : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hm : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hmodj : Nat.Primrec (fun t : ℕ => myModPow2 t.unpair.2.unpair.2 (2 ^ t.unpair
    .2.unpair.1)) :=
    (primrec.myModPow2.comp (hm.pair (primrec_two_pow hj))).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
```

```
  have hmodk : Nat.Primrec (fun t : ℕ => myModPow2 t.unpair.2.unpair.2 (2 ^ t.unpair
    .1)) :=
    (primrec.myModPow2.comp (hm.pair (primrec_two_pow hk))).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hups : Nat.Primrec (fun t : ℕ =>
      myUpsample t.unpair.2.unpair.1 t.unpair.1 (myModPow2 t.unpair.2.unpair.2
        (2 ^ t.unpair.2.unpair.1))) :=
    (primrec.myUpsample.comp (hj.pair (hk.pair hmodj))).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  exact (primrec_isZero.comp (primrec_add₂ (primrec_sub₂ hups hmodk)
    (primrec_sub₂ hmodk hups))).of_eq fun t => rfl

theorem primrec_minLevel : Nat.Primrec (fun t => minLevel t.unpair.1 t.unpair.2) := by

  have hk : Nat.Primrec (fun w : ℕ => w.unpair.1.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.left
  have hm : Nat.Primrec (fun w : ℕ => w.unpair.1.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.left
  have hi : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hih : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hsub : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1 - w.unpair.2.unpair.2) :=
    primrec_sub₂ hi hih
  have hpm : Nat.Primrec (fun w : ℕ => isPeriodicMask w.unpair.1.unpair.1 w.unpair.2.
    unpair.1
      w.unpair.1.unpair.2) :=
    (primrec_isPeriodicMask.comp (hk.pair (hi.pair hm))).of_eq fun w => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hsucc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1 + 1) := Nat.Primrec.succ.
    comp hi
  have hGfn : Nat.Primrec (fun w =>
      selectFn (isZero (w.unpair.2.unpair.1 - w.unpair.2.unpair.2))
        (selectFn (isPeriodicMask w.unpair.1.unpair.1 w.unpair.2.unpair.1 w.unpair.1.
    unpair.2)
          w.unpair.2.unpair.1 (w.unpair.2.unpair.1 + 1))
        w.unpair.2.unpair.2) :=
    primrec_selectFn (primrec_isZero.comp hsub) (primrec_selectFn hpm hi hsucc) hih
  have hprec := Nat.Primrec.prec (Nat.Primrec.const 0) hGfn
  have hpack : Nat.Primrec (fun t : ℕ => Nat.pair t (t.unpair.1 + 1)) :=
    Nat.Primrec.id.pair (Nat.Primrec.succ.comp Nat.Primrec.left)
  refine (hprec.comp hpack).of_eq fun t => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]
  rfl

theorem primrec_minMask : Nat.Primrec (fun t => minMask t.unpair.1 t.unpair.2) := by
  have hm : Nat.Primrec (fun t : ℕ => t.unpair.2) := Nat.Primrec.right
  have hlvl : Nat.Primrec (fun t : ℕ => minLevel t.unpair.1 t.unpair.2) :=
    primrec_minLevel
  have hpow : Nat.Primrec (fun t : ℕ => (2:ℕ) ^ minLevel t.unpair.1 t.unpair.2) :=
    primrec_two_pow hlvl
  exact (primrec.myModPow2.comp (hm.pair hpow)).of_eq fun t => by
    simp only [unpair_pair_fst, unpair_pair_snd, minMask]

end DomainTheory.NeighbourhoodSystems
```

splitV.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.minLevel

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open Domain.Recursive NeighborhoodSystem

def myClearBit (m ? : ℕ) : ℕ := m - 2 ^ ?

def myFirstBit (m N : ℕ) : ℕ :=
  Nat.rec (motive := fun _ => ℕ) 0
    (fun i ih => selectFn (isZero (i - ih)) (selectFn (myTestBit m i) i (i + 1)) ih) N

def splitVMinLevel (n : ℕ) : ℕ := minLevel (canonIdx n).unpair.1 (canonIdx n).unpair.2

def splitVMinMask (n : ℕ) : ℕ := minMask (canonIdx n).unpair.1 (canonIdx n).unpair.2

def splitVUpsampled (n : ℕ) : ℕ :=
  myUpsample (splitVMinLevel n) (splitVMinLevel n + 1) (splitVMinMask n)

def splitVBit (n : ℕ) : ℕ :=
  myFirstBit (splitVUpsampled n) (2 ^ (splitVMinLevel n + 1))

def splitVLeft (n : ℕ) : ℕ := Nat.pair (splitVMinLevel n + 1) (2 ^ splitVBit n)

def splitVRight (n : ℕ) : ℕ :=
  Nat.pair (splitVMinLevel n + 1) (myClearBit (splitVUpsampled n) (splitVBit n))

theorem myFirstBit_succ (m i : ℕ) :
    myFirstBit m (i + 1) =
      selectFn (isZero (i - myFirstBit m i)) (selectFn (myTestBit m i) i (i + 1))
        (myFirstBit m i) := rfl

theorem myFirstBit_spec (m N : ℕ) :
    (myFirstBit m N < N ∧ m.testBit (myFirstBit m N) = true ∧
        ∀ j < myFirstBit m N, m.testBit j = false) ∨
      (myFirstBit m N = N ∧ ∀ j < N, m.testBit j = false) := by
  induction N with
  | zero => exact Or.inr ⟨rfl, fun j hj => absurd hj (Nat.not_lt_zero j)⟩
  | succ i ih =>
    rw [myFirstBit_succ]
    rcases ih with ⟨hlt, htrue, hmin⟩ | ⟨heq, hall⟩
    · have hne : i - myFirstBit m i = 0 := by omega
      have hz : isZero (i - myFirstBit m i) = 0 := by
        have hle := isZero_le_one (i - myFirstBit m i)
        rcases (show isZero (i - myFirstBit m i) = 0 ∨ isZero (i - myFirstBit m i) = 1
     by omega)
          with h | h
        · exact h
        · exact absurd ((isZero_eq_one_iff _).mp h) hne
      rw [hz, selectFn_zero]
```

```
      exact Or.inl ⟨by omega, htrue, hmin⟩
    · have hz : isZero (i - myFirstBit m i) = 1 :=
        (isZero_eq_one_iff _).mpr (by omega)
      rw [hz, selectFn_one]
      have hle : myTestBit m i ≤ 1 := myTestBit.le_one m i
      rcases (show myTestBit m i = 0 ∨ myTestBit m i = 1 by omega) with hbit | hbit
      · rw [hbit, selectFn_zero]
        have hfalse : m.testBit i = false := by
          by_contra hcontra
          have := (myTestBit.eq_one_iff m i).mpr (by simpa using hcontra)
          omega
        refine Or.inr ⟨by omega, fun j hj => ?_⟩
        rcases (show j < i ∨ j = i by omega) with hlt' | heq'
        · exact hall j hlt'
        · subst heq'; exact hfalse
      · rw [hbit, selectFn_one]
        have htrue : m.testBit i = true := (myTestBit.eq_one_iff m i).mp hbit
        exact Or.inl ⟨by omega, htrue, fun j hj => hall j (by omega)⟩

theorem myFirstBit_lt {m N : ℕ} (h : ∃ ? < N, m.testBit ? = true) : myFirstBit m N < N
     := by
  rcases myFirstBit_spec m N with ⟨hlt, -, -⟩ | ⟨heq, hall⟩
  · exact hlt
  · obtain ⟨?, h?N, h?true⟩ := h
    exact absurd h?true (by simpa using hall ? h?N)

theorem myFirstBit_testBit {m N : ℕ} (h : ∃ ? < N, m.testBit ? = true) :
    m.testBit (myFirstBit m N) = true := by
  rcases myFirstBit_spec m N with ⟨-, htrue, -⟩ | ⟨heq, hall⟩
  · exact htrue
  · obtain ⟨?, h?N, h?true⟩ := h
    exact absurd h?true (by simpa using hall ? h?N)

theorem myClearBit_eq_xor {m ? : ℕ} (h : m.testBit ? = true) : myClearBit m ? = m ^^^
    2 ^ ? := by
  have hrlt : m % 2 ^ ? < 2 ^ ? := Nat.mod_lt m (Nat.two_pow_pos ?)
  have h2 : (2 : ℕ) ^ (? + 1) = 2 * 2 ^ ? := by rw [pow_succ]; ring
  have hrlt2 : m % 2 ^ ? < 2 ^ (? + 1) := by omega
  have hqr : m % 2 ^ (? + 1) = 2 ^ ? + m % 2 ^ ? := by
    have hb : (m % 2 ^ (? + 1)).testBit ? = true := by
      rw [Nat.testBit_mod_two_pow, h, decide_eq_true_iff.mpr (Nat.lt_succ_self ?),
    Bool.true_and]
    have hblt : m % 2 ^ (? + 1) < 2 ^ (? + 1) := Nat.mod_lt m (Nat.two_pow_pos (? + 1)
    )
    have hbge : 2 ^ ? ≤ m % 2 ^ (? + 1) := by
      rcases Nat.lt_or_ge (m % 2 ^ (? + 1)) (2 ^ ?) with hcon | hcon
      · exfalso
        rw [Nat.testBit_lt_two_pow hcon] at hb
        simp at hb
      · exact hcon
    have hmm : m % 2 ^ (? + 1) % 2 ^ ? = m % 2 ^ ? :=
      Nat.mod_mod_of_dvd m (pow_dvd_pow 2 (Nat.le_succ ?))
    have hsub : m % 2 ^ (? + 1) % 2 ^ ? = m % 2 ^ (? + 1) - 2 ^ ? := by
      have heq2 : m % 2 ^ (? + 1) = (m % 2 ^ (? + 1) - 2 ^ ?) + 2 ^ ? := by omega
      calc m % 2 ^ (? + 1) % 2 ^ ?
          = ((m % 2 ^ (? + 1) - 2 ^ ?) + 2 ^ ?) % 2 ^ ? := by rw [← heq2]
```

```
        _ = (m % 2 ^ (? + 1) - 2 ^ ?) % 2 ^ ? := Nat.add_mod_right _ _
        _ = m % 2 ^ (? + 1) - 2 ^ ? := Nat.mod_eq_of_lt (by omega)
    omega
  have hclear : myClearBit m ? = 2 ^ (? + 1) * (m / 2 ^ (? + 1)) + m % 2 ^ ? := by
    have hdm := Nat.div_add_mod m (2 ^ (? + 1))
    unfold myClearBit
    omega
  apply Nat.eq_of_testBit_eq
  intro j
  rw [hclear, Nat.testBit_two_pow_mul_add _ hrlt2 j, Nat.testBit_xor, Nat.
    testBit_two_pow]
  rcases lt_trichotomy j ? with hjl | hjl | hjl
  · rw [ite_eq_left (show j < ? + 1 by omega), Nat.testBit_mod_two_pow,
      decide_eq_true_iff.mpr hjl, decide_eq_false_iff_not.mpr (show ? = j by omega)]
    simp
  · have hjt : m.testBit j = true := by rw [hjl]; exact h
    rw [ite_eq_left (show j < ? + 1 by omega), Nat.testBit_mod_two_pow,
      decide_eq_false_iff_not.mpr (show ¬ j < ? by omega), hjt,
      decide_eq_true_iff.mpr hjl.symm]
    rfl
  · rw [ite_eq_right (show ¬ j < ? + 1 by omega), Nat.testBit_div_two_pow,
      show j - (? + 1) + (? + 1) = j by omega, decide_eq_false_iff_not.mpr (show ? = j
     by omega)]
    simp

theorem levelSet_splitVMin (n : ℕ) : levelSet (splitVMinLevel n) (splitVMinMask n) =
    VX n :=
  levelSet_minLevel (canonIdx n).unpair.1 (canonIdx n).unpair.2

theorem splitVMin_congr {n n' : ℕ} (hn : VX n = VX n') :
    splitVMinLevel n = splitVMinLevel n' ∧ splitVMinMask n = splitVMinMask n' := by
  have h : levelSet (canonIdx n).unpair.1 (canonIdx n).unpair.2 =
      levelSet (canonIdx n').unpair.1 (canonIdx n').unpair.2 := hn
  exact minLevel_unique h

theorem splitV_mask_nonempty (n : ℕ) :
    ∃ ? < 2 ^ (splitVMinLevel n + 1), (splitVUpsampled n).testBit ? = true := by
  have hne : (levelSet (splitVMinLevel n) (splitVMinMask n)).Nonempty := by
    rw [levelSet_splitVMin]; exact VX_nonempty n
  apply levelSet.nonempty_iff.mp
  show (levelSet (splitVMinLevel n + 1) (splitVUpsampled n)).Nonempty
  unfold splitVUpsampled
  rwa [levelSet.myUpsample (Nat.le_succ _)]

theorem splitV_bit_lt (n : ℕ) : splitVBit n < 2 ^ (splitVMinLevel n + 1) :=
  myFirstBit_lt (splitV_mask_nonempty n)

theorem splitV_bit_testBit (n : ℕ) : (splitVUpsampled n).testBit (splitVBit n) = true
    :=
  myFirstBit_testBit (splitV_mask_nonempty n)

theorem splitV_twin_testBit (n : ℕ) :
    (splitVUpsampled n).testBit (splitVBit n ^^^ 2 ^ splitVMinLevel n) = true := by
  set k := splitVMinLevel n with hk
  set m := splitVMinMask n with hm
  set ?₀ := splitVBit n with h?₀
```

```
  set M := splitVUpsampled n with hMdef
  have hlevelEq : levelSet (k + 1) M = levelSet k m := by
    rw [hMdef]; unfold splitVUpsampled; exact levelSet.myUpsample (Nat.le_succ k) m
  have hlt : ?₀ < 2 ^ (k + 1) := splitV_bit_lt n
  have hbit : M.testBit ?₀ = true := splitV_bit_testBit n
  have h2 : (2 : ℕ) ^ (k + 1) = 2 * 2 ^ k := by rw [pow_succ]; ring
  have hpos : (2 : ℕ) ^ k > 0 := Nat.two_pow_pos k
  have h2k : (2 : ℕ) ^ k < 2 ^ (k + 1) := by omega
  have htwinlt : ?₀ ^^^ 2 ^ k < 2 ^ (k + 1) := Nat.xor_lt_two_pow hlt h2k
  have hmod : (?₀ ^^^ 2 ^ k) % 2 ^ k = ?₀ % 2 ^ k := by
    apply Nat.eq_of_testBit_eq
    intro i
    rw [Nat.testBit_mod_two_pow, Nat.testBit_mod_two_pow, Nat.testBit_xor, Nat.
    testBit_two_pow]
    rcases lt_or_ge i k with hik | hik
    · rw [decide_eq_true_iff.mpr hik, decide_eq_false_iff_not.mpr (show k = i by omega)
    ,
        Bool.xor_false]
    · rw [decide_eq_false_iff_not.mpr (show ¬ i < k by omega)]
      simp
  have h1 : ?₀ ∈ levelSet k m := by
    have hM : ?₀ ∈ levelSet (k + 1) M := by
      rw [mem_levelSet, Nat.mod_eq_of_lt hlt]; exact hbit
    rwa [hlevelEq] at hM
  have h2' : (?₀ ^^^ 2 ^ k) ∈ levelSet k m := by
    rw [mem_levelSet, hmod]
    rwa [mem_levelSet] at h1
  rw [← hlevelEq] at h2'
  rwa [mem_levelSet, Nat.mod_eq_of_lt htwinlt] at h2'

theorem xor_two_pow_ne_self (a k : ℕ) : a ^^^ 2 ^ k = a := by
  have hb : (2 : ℕ) ^ k = 0 := (Nat.two_pow_pos k).ne'
  intro h
  apply hb
  have h2 : a ^^^ (a ^^^ 2 ^ k) = a ^^^ a := by rw [h]
  simp [← Nat.xor_assoc, Nat.xor_self, Nat.zero_xor] at h2

theorem splitV_left_nonempty (n : ℕ) :
    (levelSet (splitVMinLevel n + 1) (2 ^ splitVBit n)).Nonempty :=
  levelSet.nonempty_iff.mpr ⟨splitVBit n, splitV_bit_lt n, by simp⟩

theorem splitV_right_nonempty (n : ℕ) :
    (levelSet (splitVMinLevel n + 1) (myClearBit (splitVUpsampled n) (splitVBit n))).
    Nonempty := by
  rw [myClearBit_eq_xor (splitV_bit_testBit n)]
  have h2 : (2 : ℕ) ^ (splitVMinLevel n + 1) = 2 * 2 ^ splitVMinLevel n := by
    rw [pow_succ]; ring
  have hpos : (2 : ℕ) ^ splitVMinLevel n > 0 := Nat.two_pow_pos _
  have h2k : (2 : ℕ) ^ splitVMinLevel n < 2 ^ (splitVMinLevel n + 1) := by omega
  refine levelSet.nonempty_iff.mpr
    ⟨splitVBit n ^^^ 2 ^ splitVMinLevel n,
      Nat.xor_lt_two_pow (splitV_bit_lt n) h2k, ?_⟩
  rw [Nat.testBit_xor, splitV_twin_testBit n, Nat.testBit_two_pow,
    decide_eq_false_iff_not.mpr (xor_two_pow_ne_self (splitVBit n) (splitVMinLevel n))
    .symm]
  rfl
```

```
theorem VX_splitVLeft (n : ℕ) :
    VX (splitVLeft n) = levelSet (splitVMinLevel n + 1) (2 ^ splitVBit n) := by
  have hne : (levelSet (splitVLeft n).unpair.1 (splitVLeft n).unpair.2).Nonempty := by
    unfold splitVLeft
    rw [unpair_pair_fst, unpair_pair_snd]
    exact splitV_left_nonempty n
  show levelSet (canonIdx (splitVLeft n)).unpair.1 (canonIdx (splitVLeft n)).unpair.2
    = _
  rw [canonIdx.eq_self_of_nonempty hne]
  unfold splitVLeft
  rw [unpair_pair_fst, unpair_pair_snd]

theorem VX_splitVRight (n : ℕ) :
    VX (splitVRight n) =
      levelSet (splitVMinLevel n + 1) (myClearBit (splitVUpsampled n) (splitVBit n))
    := by
  have hne : (levelSet (splitVRight n).unpair.1 (splitVRight n).unpair.2).Nonempty :=
    by
    unfold splitVRight
    rw [unpair_pair_fst, unpair_pair_snd]
    exact splitV_right_nonempty n
  show levelSet (canonIdx (splitVRight n)).unpair.1 (canonIdx (splitVRight n)).unpair
    .2 = _
  rw [canonIdx.eq_self_of_nonempty hne]
  unfold splitVRight
  rw [unpair_pair_fst, unpair_pair_snd]

theorem splitV_disjoint (n : ℕ) : VX (splitVLeft n) ∩ VX (splitVRight n) = ∅ := by
  rw [VX_splitVLeft, VX_splitVRight, myClearBit_eq_xor (splitV_bit_testBit n),
    levelSet.inter_same_level]
  ext i
  simp only [mem_levelSet, Set.mem_empty_iff_false, iff_false, Nat.testBit_and, Bool.
    and_eq_true]
  rintro ⟨h1, h2⟩
  have hpos : i % 2 ^ (splitVMinLevel n + 1) = splitVBit n := by
    by_contra hne'
    rw [Nat.testBit_two_pow] at h1
    exact hne' (of_decide_eq_true h1).symm
  rw [hpos, Nat.testBit_xor, splitV_bit_testBit n] at h2
  simp at h2

theorem splitV_union (n : ℕ) : VX (splitVLeft n) ∪ VX (splitVRight n) = VX n := by
  have hML : levelSet (splitVMinLevel n + 1) (splitVUpsampled n) = VX n := by
    unfold splitVUpsampled
    rw [levelSet.myUpsample (Nat.le_succ _)]
    exact levelSet_splitVMin n
  rw [VX_splitVLeft, VX_splitVRight, myClearBit_eq_xor (splitV_bit_testBit n),
    levelSet.union_same_level, ← hML]
  apply congrArg (levelSet (splitVMinLevel n + 1))
  apply Nat.eq_of_testBit_eq
  intro i
  rw [Nat.testBit_or, Nat.testBit_xor]
  rcases eq_or_ne i (splitVBit n) with rfl | hi
  · simp [splitV_bit_testBit n]
  · simp [Ne.symm hi]
```

```
theorem splitVLeft_eq_of_congr {n n' : ℕ} (hn : VX n = VX n') :
    splitVLeft n = splitVLeft n' := by
  obtain ⟨hlvl, hmask⟩ := splitVMin_congr hn
  have hups : splitVUpsampled n = splitVUpsampled n' := by
    unfold splitVUpsampled; rw [hlvl, hmask]
  have hbit : splitVBit n = splitVBit n' := by
    unfold splitVBit; rw [hups, hlvl]
  unfold splitVLeft
  rw [hlvl, hbit]

theorem splitVRight_eq_of_congr {n n' : ℕ} (hn : VX n = VX n') :
    splitVRight n = splitVRight n' := by
  obtain ⟨hlvl, hmask⟩ := splitVMin_congr hn
  have hups : splitVUpsampled n = splitVUpsampled n' := by
    unfold splitVUpsampled; rw [hlvl, hmask]
  have hbit : splitVBit n = splitVBit n' := by
    unfold splitVBit; rw [hups, hlvl]
  unfold splitVRight
  rw [hlvl, hups, hbit]

theorem splitVLeft_congr {n n' : ℕ} (hn : VX n = VX n') :
    VX (splitVLeft n) = VX (splitVLeft n') := by
  rw [splitVLeft_eq_of_congr hn]

theorem splitVRight_congr {n n' : ℕ} (hn : VX n = VX n') :
    VX (splitVRight n) = VX (splitVRight n') := by
  rw [splitVRight_eq_of_congr hn]

theorem myFirstBit_le (m N : ℕ) : myFirstBit m N ≤ N := by
  rcases myFirstBit_spec m N with ⟨h, -, -⟩ | ⟨h, -⟩ <;> omega

theorem primrec_myClearBit : Nat.Primrec (fun t => myClearBit t.unpair.1 t.unpair.2)
    := by
  have hpow : Nat.Primrec (fun t : ℕ => (2 : ℕ) ^ t.unpair.2) := primrec_two_pow Nat.
    Primrec.right
  exact (primrec_sub₂ Nat.Primrec.left hpow).of_eq fun _ => rfl

theorem primrec_myFirstBit : Nat.Primrec (fun t => myFirstBit t.unpair.1 t.unpair.2)
    := by
  have hm : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hi : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hih : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hsub : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1 - w.unpair.2.unpair.2) :=
    primrec_sub₂ hi hih
  have htb : Nat.Primrec (fun w : ℕ => myTestBit w.unpair.1 w.unpair.2.unpair.1) :=
    (primrec.myTestBit.comp (hm.pair hi)).of_eq fun w => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hsucc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1 + 1) := Nat.Primrec.succ.
    comp hi
  have hGfn : Nat.Primrec (fun w =>
      selectFn (isZero (w.unpair.2.unpair.1 - w.unpair.2.unpair.2))
        (selectFn (myTestBit w.unpair.1 w.unpair.2.unpair.1) w.unpair.2.unpair.1
          (w.unpair.2.unpair.1 + 1))
```

```
        w.unpair.2.unpair.2) :=
    primrec_selectFn (primrec_isZero.comp hsub) (primrec_selectFn htb hi hsucc) hih
  have hprec := Nat.Primrec.prec (Nat.Primrec.const 0) hGfn
  refine (hprec.comp (Nat.Primrec.left.pair Nat.Primrec.right)).of_eq fun t => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd]
  rfl

theorem primrec_splitVMinLevel : Nat.Primrec splitVMinLevel := by
  have hk : Nat.Primrec (fun n : ℕ => (canonIdx n).unpair.1) :=
    Nat.Primrec.left.comp primrec.canonIdx
  have hm : Nat.Primrec (fun n : ℕ => (canonIdx n).unpair.2) :=
    Nat.Primrec.right.comp primrec.canonIdx
  exact (primrec_minLevel.comp (hk.pair hm)).of_eq fun n => by
    simp only [unpair_pair_fst, unpair_pair_snd]; rfl

theorem primrec_splitVMinMask : Nat.Primrec splitVMinMask := by
  have hk : Nat.Primrec (fun n : ℕ => (canonIdx n).unpair.1) :=
    Nat.Primrec.left.comp primrec.canonIdx
  have hm : Nat.Primrec (fun n : ℕ => (canonIdx n).unpair.2) :=
    Nat.Primrec.right.comp primrec.canonIdx
  exact (primrec_minMask.comp (hk.pair hm)).of_eq fun n => by
    simp only [unpair_pair_fst, unpair_pair_snd]; rfl

theorem primrec_splitVUpsampled : Nat.Primrec splitVUpsampled := by
  have hk1 : Nat.Primrec (fun n : ℕ => splitVMinLevel n + 1) :=
    Nat.Primrec.succ.comp primrec_splitVMinLevel
  exact (primrec.myUpsample.comp
      (primrec_splitVMinLevel.pair (hk1.pair primrec_splitVMinMask))).of_eq fun n =>
    by
    simp only [unpair_pair_fst, unpair_pair_snd]; rfl

theorem primrec_splitVBit : Nat.Primrec splitVBit := by
  have hk1 : Nat.Primrec (fun n : ℕ => splitVMinLevel n + 1) :=
    Nat.Primrec.succ.comp primrec_splitVMinLevel
  have hbound : Nat.Primrec (fun n : ℕ => (2 : ℕ) ^ (splitVMinLevel n + 1)) :=
    primrec_two_pow hk1
  exact (primrec_myFirstBit.comp (primrec_splitVUpsampled.pair hbound)).of_eq fun n =>
     by
    simp only [unpair_pair_fst, unpair_pair_snd]; rfl

theorem primrec_splitVLeft : Nat.Primrec splitVLeft := by
  have hk1 : Nat.Primrec (fun n : ℕ => splitVMinLevel n + 1) :=
    Nat.Primrec.succ.comp primrec_splitVMinLevel
  have hpow : Nat.Primrec (fun n : ℕ => (2 : ℕ) ^ splitVBit n) := primrec_two_pow
    primrec_splitVBit
  exact (Nat.Primrec.pair hk1 hpow).of_eq fun n => rfl

theorem primrec_splitVRight : Nat.Primrec splitVRight := by
  have hk1 : Nat.Primrec (fun n : ℕ => splitVMinLevel n + 1) :=
    Nat.Primrec.succ.comp primrec_splitVMinLevel
  have hclear : Nat.Primrec (fun n : ℕ => myClearBit (splitVUpsampled n) (splitVBit n)
    ) :=
    (primrec_myClearBit.comp (primrec_splitVUpsampled.pair primrec_splitVBit)).of_eq
    fun n => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  exact (Nat.Primrec.pair hk1 hclear).of_eq fun n => rfl
```

```
end DomainTheory.NeighbourhoodSystems
```

VComputablePresentation.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.VX
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.Vinter
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.minLevel
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.splitV

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

end DomainTheory.NeighbourhoodSystems
end
```

IsComputableSplit.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

structure IsComputableSplit {α ? : Type*} {V : NeighborhoodSystem α} {W :
    NeighborhoodSystem ?}
    (P : ComputablePresentation V) (Q : ComputablePresentation W)
    (split : Set α → Set ? → Set α → Set ? × Set ?) where

  posIdx : ℕ → ℕ → ℕ → ℕ

  negIdx : ℕ → ℕ → ℕ → ℕ

  posIdx_primrec : Nat.Primrec (fun t => posIdx t.unpair.1 t.unpair.2.unpair.1 t.
    unpair.2.unpair.2)

  negIdx_primrec : Nat.Primrec (fun t => negIdx t.unpair.1 t.unpair.2.unpair.1 t.
    unpair.2.unpair.2)

  posIdx_spec : ∀ n m k, (split (P.X n) (Q.X m) (P.X k)).1 = ∅ →
    (split (P.X n) (Q.X m) (P.X k)).1 = Q.X (posIdx n m k)

  negIdx_spec : ∀ n m k, (split (P.X n) (Q.X m) (P.X k)).2 = ∅ →
    (split (P.X n) (Q.X m) (P.X k)).2 = Q.X (negIdx n m k)

end DomainTheory.NeighbourhoodSystems
```

EXERCISE 8.12. Generalize the notation $2X + 1$ for subsets $X \subseteq \mathbb{N}$ to sets of the form

$$2^k X + \ell, \quad \text{where } \ell < 2^k.$$

Let V be the non-empty finite unions of sets $2^k\mathbb{N} + \ell$. Show that $U \cong V$ and that the isomorphism is effective, thus obtaining another presentation of U.

Tip summary Scott's claim is a single conjunction: V is effectively given, and U is effectively isomorphic to V. The Lean tip `exercise_8_12` packages exactly that, assembling `V_isEffectivelyGiven` with the concrete effective isomorphism `effectiveIso812_UV`.

Development Scott gives no written proof—only the construction of V and the demand that the isomorphism be effective. The formalization therefore supplies a structured development under the exercise: present V, build an abstract domain isomorphism, make it effective, equip both sides with computable bisections/splits, and assemble the effective iso.

Presenting V The integer neighbourhood system V is built from affine residue classes $2^k\mathbb{N} + \ell$ and their non-empty finite unions (`affine` / `levelSet` / `upsample`). Pure neighbourhood facts live under `namespace V` (`V.union_mem`, `V.diff_mem`, `V.isPositive`, ...).

— `V` and Pref-folded neighbourhood lemmas

Its computable presentation (indices, decoding, intersection/union/difference codes, and the canonical bisection `splitV*`) lives in a dedicated library module.

— computable presentation of `V`, including `VComputablePresentation` and `V.isEffectivelyGiven`

Abstract isomorphism (8.12(c)) Given two positive, difference-closed, atomless neighbourhood systems with enumerations that cover every neighbourhood and start at the master set, one builds paired atom sequences (`XPseq`/`YPseq`) from mutual `SplitSpec'` probes and obtains a domain isomorphism. The headline is `isomorphic_812c`.

— difference-closure / no-minimal apparatus, atom pairing, and `isomorphic_812c`

Abstract `E`-side atoms The one-sided atom apparatus against an abstract neighbourhood system `E` (the `atomU` analogue) lives under `atomE`, with Pref-folded companions `atomE.zero`, `atomE.succ`, `atomE.congr`, `atomE.invariant`, ...

— `atomE`, `YseqE`, and Pref-folded `atomE.xxx` lemmas

Computable presentation predicates The data-carrying structures for computable difference, split, union, and bisection each live in their own library module, with Pref-folded companions under the structure namespace.

— `IsComputableDiff` and Diff-side deciders

— `IsComputableSplit`

— `IsComputableUnion` and `combineFound2`

— `ComputableBisection` and bisection-derived splits

Effective isomorphism (8.12(d)) The same back-and-forth is carried out on computable presentations: coded atom sequences, primitivity of the step maps, and the order isomorphism `domainIsoCode812d` lift to an `EffectiveIso`. The generic assembly is `effectiveIso812d`.

— coded pairing, primrec witnesses, and `effectiveIso812d`

Computable split of U against V (8.12(e)) With `U`'s computable difference and V's bisection in hand, `splitX812e` is the concrete `IsComputableSplit` of U probing V (`isComputableSplit.«812e»`).

— `U_isComputableDiff`, `splitX812e`, and `isComputableSplit.«812e»`

Symmetric split and UV assembly (8.12(f)–(g)) The mirror split `splitX812f` (V probing U via `UBisection2`), both `SplitSpec′` halves, computable unions, and the final `EffectiveIso U V` are assembled as `effectiveIso812_UV`.

— «`812f`», `hxSplit812e`/`hySplit812f`, unions, and `effectiveIso812_UV`

The tip then simply pairs effective givenness of V with that isomorphism, which is Exercise 8.12 in Scott's sense.

— Scott tip `exercise_8_12`

3.9.15 Exercise 8.13 — Boolean-algebra filters

(For logicians.) Prove that the universal domain U is isomorphic to the domain of all proper filters of the free Boolean algebra on $\aleph_0$-generators (= the Lindenbaum algebra of propositional calculus). (For topologists.) Connect this

representation of $\mathcal{U}$ with the collection of non-empty open subsets of the product space $2^{\mathbf{N}}$ (= Cantor space).

Tip summary The tip is the isomorphism $U \cong V$, obtained from the effective iso of Exercise 8.12 together with the Boolean-algebra presentation of `V`.

Development Defines the Boolean algebra generated by bit-test generators.

`GeneratedBy.lean`

```
module

public import Mathlib.Algebra.BigOperators.Group.Finset.Basic
public import Mathlib.Data.Nat.Bitwise
public import Mathlib.Data.Nat.Bits
public import Mathlib.Data.Nat.BitIndices
public import Mathlib.Combinatorics.Colex

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

inductive GeneratedBy {α : Type*} (g : ℕ → Set α) : Set α → Prop
  | of (i : ℕ) : GeneratedBy g (g i)
  | univ : GeneratedBy g Set.univ
  | inter {X Y} : GeneratedBy g X → GeneratedBy g Y → GeneratedBy g (X ∩ Y)
  | union {X Y} : GeneratedBy g X → GeneratedBy g Y → GeneratedBy g (X ∪ Y)
  | compl {X} : GeneratedBy g X → GeneratedBy g X?
```

```
def bitmaskOf (s : Finset ℕ) : ℕ := ? j ∈ s, 2 ^ j

theorem testBit_sum_two_pow {s : Finset ℕ} {i : ℕ} : (? j ∈ s, 2 ^ j).testBit i ↔ i ∈
    s := by
  rw [← Nat.mem_bitIndices, ← List.mem_toFinset, Finset.
    toFinset_bitIndices_sum_two_pow]

@[simp] theorem testBit_bitmaskOf {s : Finset ℕ} {i : ℕ} : (bitmaskOf s).testBit i ↔
    i ∈ s :=
  testBit_sum_two_pow

def generator (i : ℕ) : Set ℕ := {n : ℕ | n.testBit i = true}

@[simp] theorem mem_generator {i n : ℕ} : n ∈ generator i ↔ n.testBit i = true := Iff
    .rfl

end DomainTheory.NeighbourhoodSystems
end
```

Exercise_8_13.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    BooleanAlgebraFilters

@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem

theorem exercise_8_13 : U ≅? V := exercise813a

end
```

> Independence and filter facts that identify `V` with filters of that algebra.
> The tip then assembles those tools into Scott's statement.
> — `exercise_8_13`

3.9.16 Exercise 8.14 — closure operators

A retraction $a : D \to D$ is called a *closure operator* iff $I_D \sqsubseteq a$. On a domain like $P\mathbf{N}$, give some examples of closure operators. (Hint: Close up a set of integers under addition. Is this continuous on $P\mathbf{N}$?) Prove in general for any closure $a : D \to D$ that the fixed-point set of a is always a finitary domain. (Hint: Show that the fixed-point set is closed under intersections and directed unions.) What are the finite elements of the fixed-point set?

Tip summary The tip states that the fixed-point set of any closure operator is a finitary domain.

Development Defines closure operators and shows `Fix(a)` is a finitary domain.

ClosureOperatorDomain.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_1

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    DedekindCutProjection
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
universe u
variable {α : Type u} {E : NeighborhoodSystem α}

class ClosureOperator (a : ApproximableMap E E) : Prop where
  out : Retraction a ∧ idMap E ≤ a

section ClosureOperator

variable {a : ApproximableMap E E}

def IsCompactFix (_h : ClosureOperator a) (y : FixSet a) : Prop :=
  ∀ {I : Type u} [Nonempty I] (d : I → FixSet a)
    (hdir : ∀ i j, ∃ k, (d i).1 ≤ (d k).1 ∧ (d j).1 ≤ (d k).1),
    y.1 ≤ iSupDirected (fun i => (d i).1) hdir → ∃ i, y.1 ≤ (d i).1

end ClosureOperator

section FiniteDomain

variable {a : ApproximableMap E E} (h : ClosureOperator a)

def CompactFix (h : ClosureOperator a) := {y : FixSet a // IsCompactFix h y}

end FiniteDomain

section ClosureOperator

variable {a : ApproximableMap E E}

def botFix (h : ClosureOperator a) : FixSet a :=
  ⟨a.toElementMap ⊥, toElementMap_idem h.out.1 ⊥⟩

theorem botFix_le (h : ClosureOperator a) (y : FixSet a) : (botFix h).1 ≤ y.1 := by
  have h1 : a.toElementMap ⊥ ≤ a.toElementMap y.1 := a.toElementMap_mono bot_le
  rwa [y.2] at h1

theorem isCompactFix_botFix (h : ClosureOperator a) : IsCompactFix h (botFix h) := by
  intro I _ d _ _
  obtain ⟨i0⟩ := (inferInstance : Nonempty I)
  exact ⟨i0, botFix_le h (d i0)⟩
```

```
end ClosureOperator

section FiniteDomain

variable {a : ApproximableMap E E} (h : ClosureOperator a)

def botK : CompactFix h := ⟨botFix h, isCompactFix_botFix h⟩

end FiniteDomain

section ClosureOperator

variable {a : ApproximableMap E E}

theorem le_toElementMap_of_isClosureOperator (h : ClosureOperator a) (y : E.Element) :
    y ≤ a.toElementMap y := by
  have h1 := (le_iff_toElementMap_le.mp h.out.2) y
  rwa [toElementMap_idMap] at h1

theorem isCompactFix_sup (h : ClosureOperator a) {y1 y2 : FixSet a}
    (hc1 : IsCompactFix h y1) (hc2 : IsCompactFix h y2)
    (hb : E.Bounded ({y1.1, y2.1} : Set E.Element)) :
    IsCompactFix h ⟨a.toElementMap (E.sSup {y1.1, y2.1} hb), toElementMap_idem h.out.1
    _⟩ := by
  intro I _ d hdir hle
  have hs_le : E.sSup {y1.1, y2.1} hb ≤ iSupDirected (fun i => (d i).1) hdir :=
    (le_toElementMap_of_isClosureOperator h _).trans hle
  have h1le : y1.1 ≤ iSupDirected (fun i => (d i).1) hdir :=
    (E.le_sSup {y1.1, y2.1} hb (by simp)).trans hs_le
  have h2le : y2.1 ≤ iSupDirected (fun i => (d i).1) hdir :=
    (E.le_sSup {y1.1, y2.1} hb (by simp)).trans hs_le
  obtain ⟨i1, hi1⟩ := hc1 d hdir h1le
  obtain ⟨i2, hi2⟩ := hc2 d hdir h2le
  obtain ⟨k, hk1, hk2⟩ := hdir i1 i2
  have hle1 : y1.1 ≤ (d k).1 := hi1.trans hk1
  have hle2 : y2.1 ≤ (d k).1 := hi2.trans hk2
  have hsup_le : E.sSup {y1.1, y2.1} hb ≤ (d k).1 :=
    E.sSup_le {y1.1, y2.1} hb (by rintro x (rfl | rfl) <;> assumption)
  refine ⟨k, ?_⟩
  have h3 := a.toElementMap_mono hsup_le
  rwa [(d k).2] at h3

theorem isCompactFix_toElementMap_principal (h : ClosureOperator a) {X : Set α} (hX :
    E.mem X) :
    IsCompactFix h ⟨a.toElementMap (E.principal hX), toElementMap_idem h.out.1 _⟩ := by
  intro I _ d hdir hle
  have hle' : E.principal hX ≤ iSupDirected (fun i => (d i).1) hdir :=
    (le_toElementMap_of_isClosureOperator h (E.principal hX)).trans hle
  obtain ⟨i, hi⟩ := principal_isCompactElt hX (fun i => (d i).1) hdir hle'
  refine ⟨i, ?_⟩
  have h2 := a.toElementMap_mono hi
  rwa [(d i).2] at h2

end ClosureOperator
```

```
section FiniteDomain

variable {a : ApproximableMap E E} (h : ClosureOperator a)

def genK {X : Set α} (hX : E.mem X) : CompactFix h :=
  ⟨⟨a.toElementMap (E.principal hX), toElementMap_idem h.out.1 _⟩,
    isCompactFix_toElementMap_principal h hX⟩

def joinCompactFix {k1 k2 : CompactFix h} {y : FixSet a}
    (hk1y : k1.1.1 ≤ y.1) (hk2y : k2.1.1 ≤ y.1) : CompactFix h :=
  ⟨⟨a.toElementMap (E.sSup {k1.1.1, k2.1.1} ⟨y.1, by rintro x (rfl | rfl) <;>
    assumption⟩),
      toElementMap_idem h.out.1 _⟩,
    isCompactFix_sup h k1.2 k2.2 ⟨y.1, by rintro x (rfl | rfl) <;> assumption⟩⟩

theorem joinCompactFix_le {k1 k2 : CompactFix h} {y : FixSet a}
    (hk1y : k1.1.1 ≤ y.1) (hk2y : k2.1.1 ≤ y.1) : (joinCompactFix h hk1y hk2y).1.1 ≤
    y.1 := by
  have hb : E.Bounded ({k1.1.1, k2.1.1} : Set E.Element) :=
    ⟨y.1, by rintro x (rfl | rfl) <;> assumption⟩
  have hsup_le : E.sSup {k1.1.1, k2.1.1} hb ≤ y.1 :=
    E.sSup_le {k1.1.1, k2.1.1} hb (by rintro x (rfl | rfl) <;> assumption)
  have h1 := a.toElementMap_mono hsup_le
  rwa [y.2] at h1

def upFix (k : CompactFix h) : Set (CompactFix h) := {q | k.1.1 ≤ q.1.1}

@[simp] theorem mem_upFix {k q : CompactFix h} : q ∈ upFix h k ↔ k.1.1 ≤ q.1.1 := Iff
    .rfl

theorem self_mem_upFix (k : CompactFix h) : k ∈ upFix h k := (mem_upFix h).mpr (
    le_refl _)

theorem upFix_antitone {k k' : CompactFix h} (hkk' : k.1.1 ≤ k'.1.1) :
    upFix h k' ⊆ upFix h k :=
  fun _ hq => hkk'.trans hq

theorem upFix_injOn {k k' : CompactFix h} (heq : upFix h k = upFix h k') : k.1.1 = k
    '.1.1 :=
  le_antisymm ((Set.ext_iff.mp heq k').mpr (self_mem_upFix h k'))
    ((Set.ext_iff.mp heq k).mp (self_mem_upFix h k))

theorem upFix_inter (k1 k2 : CompactFix h) {y : FixSet a}
    (hk1y : k1.1.1 ≤ y.1) (hk2y : k2.1.1 ≤ y.1) :
    upFix h k1 ∩ upFix h k2 = upFix h (joinCompactFix h hk1y hk2y) := by
  have hb : E.Bounded ({k1.1.1, k2.1.1} : Set E.Element) :=
    ⟨y.1, by rintro x (rfl | rfl) <;> assumption⟩
  apply Set.ext
  intro q
  simp only [mem_upFix, Set.mem_inter_iff, joinCompactFix]
  constructor
  · rintro ⟨h1q, h2q⟩
    have hb' : E.Bounded ({k1.1.1, k2.1.1} : Set E.Element) :=
      ⟨q.1.1, by rintro x (rfl | rfl) <;> assumption⟩
    have hsup_le : E.sSup {k1.1.1, k2.1.1} hb' ≤ q.1.1 :=
      E.sSup_le {k1.1.1, k2.1.1} hb' (by rintro x (rfl | rfl) <;> assumption)
```

```
    have h3 := a.toElementMap_mono hsup_le
    rwa [q.1.2] at h3
  · intro hjq
    refine ⟨?_, ?_⟩
    · exact ((E.le_sSup {k1.1.1, k2.1.1} hb (by simp)).trans
        (le_toElementMap_of_isClosureOperator h _)).trans hjq
    · exact ((E.le_sSup {k1.1.1, k2.1.1} hb (by simp)).trans
        (le_toElementMap_of_isClosureOperator h _)).trans hjq

theorem upFix_subset_upFix_botK (k : CompactFix h) : upFix h k ⊆ upFix h (botK h) :=
  fun q _ => botFix_le h q.1

def domainOfClosure (h : ClosureOperator a) : NeighborhoodSystem (CompactFix h) where
  mem S := ∃ k : CompactFix h, S = upFix h k
  master := upFix h (botK h)
  master_nonempty := ⟨botK h, self_mem_upFix h (botK h)⟩
  master_mem := ⟨botK h, rfl⟩
  sub_master := by rintro S ⟨k, rfl⟩; exact upFix_subset_upFix_botK h k
  inter_mem := by
    rintro S1 S2 Z ⟨k1, rfl⟩ ⟨k2, rfl⟩ ⟨k3, rfl⟩ hZsub
    obtain ⟨hk13, hk23⟩ := hZsub (self_mem_upFix h k3)
    exact ⟨joinCompactFix h hk13 hk23, upFix_inter h k1 k2 hk13 hk23⟩

def confirmedIdx (g : (domainOfClosure h).Element) := {k : CompactFix h // g.mem (
    upFix h k)}

instance instNonemptyConfirmedIdx (g : (domainOfClosure h).Element) :
    Nonempty (confirmedIdx h g) :=
  ⟨⟨botK h, g.master_mem⟩⟩

theorem confirmedIdx_directed (g : (domainOfClosure h).Element) :
    ∀ i j : confirmedIdx h g, ∃ k : confirmedIdx h g,
      i.1.1.1 ≤ k.1.1.1 ∧ j.1.1.1 ≤ k.1.1.1 := by
  rintro ⟨k1, hk1⟩ ⟨k2, hk2⟩
  have hint : g.mem (upFix h k1 ∩ upFix h k2) := g.inter_mem hk1 hk2
  obtain ⟨k3, hk3eq⟩ := g.sub hint
  rw [hk3eq] at hint
  have hmem3 : k3 ∈ upFix h k1 ∩ upFix h k2 := hk3eq ▸ self_mem_upFix h k3
  exact ⟨⟨k3, hint⟩, hmem3.1, hmem3.2⟩

def fromElementFilter (g : (domainOfClosure h).Element) : FixSet a :=
  ⟨iSupDirected (fun i : confirmedIdx h g => i.1.1.1) (confirmedIdx_directed h g),
    toElementMap_iSupDirected_fixed _ (confirmedIdx_directed h g) (fun i => i.1.1.2)⟩

def genFamily (y : FixSet a) (i : {X : Set α // y.1.mem X}) : FixSet a :=
  (genK h (y.1.sub i.2)).1

theorem genFamily_directed (y : FixSet a) :
    ∀ i j : {X : Set α // y.1.mem X}, ∃ k, (genFamily h y i).1 ≤ (genFamily h y k).1 ∧
      (genFamily h y j).1 ≤ (genFamily h y k).1 := by
  intro i j
  obtain ⟨k, hik, hjk⟩ := principalFamily_directed y.1 i j
  exact ⟨k, a.toElementMap_mono hik, a.toElementMap_mono hjk⟩

def toElementFilter (y : FixSet a) : (domainOfClosure h).Element where
  mem S := ∃ k : CompactFix h, S = upFix h k ∧ k.1.1 ≤ y.1
```

```
  sub := fun ⟨k, hSeq, _⟩ => ⟨k, hSeq⟩
  master_mem := ⟨botK h, rfl, botFix_le h y⟩
  inter_mem := by
    rintro S1 S2 ⟨k1, rfl, hk1y⟩ ⟨k2, rfl, hk2y⟩
    exact ⟨joinCompactFix h hk1y hk2y, upFix_inter h k1 k2 hk1y hk2y, joinCompactFix_le
     h hk1y hk2y⟩
  up_mem := by
    rintro S1 S2 ⟨k1, rfl, hk1y⟩ hS2mem hsub
    obtain ⟨k2, rfl⟩ := hS2mem
    exact ⟨k2, rfl, (mem_upFix h |>.mp (hsub (self_mem_upFix h k1))).trans hk1y⟩

theorem le_of_toElementFilter_le {y y' : FixSet a}
    (hle : toElementFilter h y ≤ toElementFilter h y') : y.1 ≤ y'.1 := by
  intro X hXy
  have hX : E.mem X := y.1.sub hXy
  have hky : (toElementFilter h y).mem (upFix h (genK h hX)) := by
    refine ⟨genK h hX, rfl, ?_⟩
    have h1 : E.principal hX ≤ y.1 := principal_le_of_mem hXy
    have h2 := a.toElementMap_mono h1
    rwa [y.2] at h2
  obtain ⟨k', hkk', hk'y'⟩ := hle _ hky
  have hkeq : (genK h hX).1.1 = k'.1.1 := upFix_injOn h hkk'
  have h1 : E.principal hX ≤ a.toElementMap (E.principal hX) :=
    le_toElementMap_of_isClosureOperator h _
  rw [show a.toElementMap (E.principal hX) = k'.1.1 from hkeq] at h1
  exact (h1.trans hk'y') X ((E.mem_principal hX).mpr ⟨hX, subset_rfl⟩)

theorem toElementFilter_fromElementFilter (g : (domainOfClosure h).Element) :
    toElementFilter h (fromElementFilter h g) = g := by
  apply Element.ext
  intro S
  constructor
  · rintro ⟨k0, rfl, hk0⟩
    obtain ⟨i, hi⟩ := k0.2 (fun i : confirmedIdx h g => i.1.1) (confirmedIdx_directed h
     g) hk0
    exact g.up_mem i.2 ⟨k0, rfl⟩ (upFix_antitone h hi)
  · intro hS
    obtain ⟨k0, rfl⟩ := g.sub hS
    exact ⟨k0, rfl, le_iSupDirected _ (confirmedIdx_directed h g) ⟨k0, hS⟩⟩

theorem toElementFilter_mono {y y' : FixSet a} (hyy' : y.1 ≤ y'.1) :
    toElementFilter h y ≤ toElementFilter h y' :=
  fun _ ⟨k, hSeq, hky⟩ => ⟨k, hSeq, hky.trans hyy'⟩

theorem toElementMap_eq_iSupDirected_genFamily (y : FixSet a) :
    y.1 = iSupDirected (fun i => (genFamily h y i).1) (genFamily_directed h y) := by
  have h1 : a.toElementMap y.1 = iSupDirected (fun i => (genFamily h y i).1) (
    genFamily_directed h y) := by
    conv_lhs => rw [eq_iSupDirected_principal y.1]
    exact toElementMap_iSupDirected a _ (principalFamily_directed y.1)
  rw [y.2] at h1
  exact h1

theorem fromElementFilter_toElementFilter (y : FixSet a) :
    fromElementFilter h (toElementFilter h y) = y := by
  apply Subtype.ext
```

```
  show iSupDirected (fun i : confirmedIdx h (toElementFilter h y) => i.1.1.1)
      (confirmedIdx_directed h (toElementFilter h y)) = y.1
  apply le_antisymm
  · apply iSupDirected_le
    rintro ⟨k, k', hkk', hk'y⟩
    exact (upFix_injOn h hkk' ▸ hk'y : k.1.1 ≤ y.1)
  · rw [toElementMap_eq_iSupDirected_genFamily h y]
    apply iSupDirected_le
    intro i
    have hk : (toElementFilter h y).mem (upFix h (genK h (y.1.sub i.2))) := by
      refine ⟨genK h (y.1.sub i.2), rfl, ?_⟩
      have h1 : E.principal (y.1.sub i.2) ≤ y.1 := principal_le_of_mem i.2
      have h2 := a.toElementMap_mono h1
      rwa [y.2] at h2
    exact le_iSupDirected (fun i : confirmedIdx h (toElementFilter h y) => i.1.1.1)
      (confirmedIdx_directed h (toElementFilter h y)) ⟨genK h (y.1.sub i.2), hk⟩

def fixSetOrderIso (h : ClosureOperator a) : FixSet a ≃o (domainOfClosure h).Element
    where
  toFun := toElementFilter h
  invFun := fromElementFilter h
  left_inv := fromElementFilter_toElementFilter h
  right_inv := toElementFilter_fromElementFilter h
  map_rel_iff' := by
    intro y y'
    exact ⟨le_of_toElementFilter_le h, toElementFilter_mono h⟩

theorem isCompactFix_iff (y : FixSet a) :
    IsCompactFix h y ↔ ∃ (X : Set α) (hX : E.mem X), y.1 = a.toElementMap (E.principal
     hX) := by
  constructor
  · intro hc
    obtain ⟨i, hi⟩ := hc (genFamily h y) (genFamily_directed h y)
      (le_of_eq (toElementMap_eq_iSupDirected_genFamily h y))
    have hX : E.mem i.1 := y.1.sub i.2
    refine ⟨i.1, hX, le_antisymm hi ?_⟩
    have h1 : E.principal hX ≤ y.1 := principal_le_of_mem i.2
    have h2 := a.toElementMap_mono h1
    rwa [y.2] at h2
  · rintro ⟨X, hX, hy⟩
    exact hy ▸ isCompactFix_toElementMap_principal h hX

theorem isFinitary_of_isClosureOperator (h : ClosureOperator a) : IsFinitary a :=
  ⟨CompactFix h, domainOfClosure h, ⟨fixSetOrderIso h⟩⟩

end FiniteDomain

end

set_option linter.unusedVariables false

theorem example_814.{u} : And
  (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    {a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E}
    (h : @DomainTheory.NeighbourhoodSystems.ClosureOperator α E a)
    (y : @DomainTheory.NeighbourhoodSystems.FixSet α E a),
```

```
    Iff (@DomainTheory.NeighbourhoodSystems.IsCompactFix α E a h y)
      (∃ (X : Set α) (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
     E X),
         @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
           (@Subtype.val (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     α E)
             (fun (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
    E) =>
               @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
                 (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E
     E a y) y)
             y)
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E E a
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α E X hX)
    )))
  (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    {a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E},
    @DomainTheory.NeighbourhoodSystems.ClosureOperator α E a → @DomainTheory.
    NeighbourhoodSystems.IsFinitary α E a) :=
  @And.intro
  (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    {a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E}
    (h : @DomainTheory.NeighbourhoodSystems.ClosureOperator α E a)
    (y : @DomainTheory.NeighbourhoodSystems.FixSet α E a),
    Iff (@DomainTheory.NeighbourhoodSystems.IsCompactFix α E a h y)
      (∃ (X : Set α) (hX : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
     E X),
         @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
           (@Subtype.val (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element
     α E)
             (fun (y : @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α
    E) =>
               @Eq (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.Element α E)
                 (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E
     E a y) y)
             y)
           (@DomainTheory.NeighbourhoodSystems.ApproximableMap.toElementMap α α E E a
             (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.principal α E X hX)
    )))
  (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    {a : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E},
    @DomainTheory.NeighbourhoodSystems.ClosureOperator α E a → @DomainTheory.
    NeighbourhoodSystems.IsFinitary α E a)
  @DomainTheory.NeighbourhoodSystems.isCompactFix_iff @DomainTheory.
    NeighbourhoodSystems.isFinitary_of_isClosureOperator

end DomainTheory.NeighbourhoodSystems
```

Exercise_8_14.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    ClosureOperatorDomain
```

```
@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap

theorem exercise_8_14 {α : Type*} {E : NeighborhoodSystem α} {a : ApproximableMap E E}
    (h : ClosureOperator a) : IsFinitary a :=
  isFinitary_of_isClosureOperator h

end
```

The tip then assembles those tools into Scott's statement.
— `exercise_8_14`

3.9.17 Exercise 8.15 — domain of subsystems

Give a direct proof that the domain $\{X \mid X \triangleleft D\}$ is effectively presented if D is. (Hint: The finite elements of the domain correspond exactly to the finite systems $X \triangleleft D$.) In the case of $D = \mathcal{U}$, show that the computable elements of the domain correspond exactly to the effectively presented domains (up to effective isomorphism).

Tip summary The tip states that if `D` is effectively given then so is (a presentation of) the domain of its subsystems.

Development Library tools: finitely generated subsystems and the reconstructed system `SubD`.
— `finGen`, `finGenSys`, `SubD`

`finGen.lean`

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem Domain.Recursive

variable {α : Type*} {D : NeighborhoodSystem α}
variable (P : ComputablePresentation D)

def combineSub (js sub1 sub2 : List ℕ) : List ℕ :=
  js.filter (fun j => decide (j ∈ sub1 ∨ j ∈ sub2))

theorem combineSub_sublist (js sub1 sub2 : List ℕ) :
    (combineSub js sub1 sub2).Sublist js := List.filter_sublist

theorem mem_combineSub {js sub1 sub2 : List ℕ} {j : ℕ} :
    j ∈ combineSub js sub1 sub2 ↔ j ∈ js ∧ (j ∈ sub1 ∨ j ∈ sub2) := by
  unfold combineSub
  rw [List.mem_filter, decide_eq_true_iff]
```

```
theorem interFrom_combineSub_eq {js sub1 sub2 : List ℕ}
    (h1 : sub1.Sublist js) (h2 : sub2.Sublist js) :
    interFrom P D.master (combineSub js sub1 sub2) =
      interFrom P D.master sub1 ∩ interFrom P D.master sub2 := by
  apply Set.ext
  intro z
  rw [Set.mem_inter_iff, mem_interFrom, mem_interFrom, mem_interFrom]
  constructor
  · rintro ⟨hzm, hall⟩
    exact ⟨⟨hzm, fun j hj => hall j (mem_combineSub.mpr ⟨h1.subset hj, Or.inl hj⟩)⟩,
      hzm, fun j hj => hall j (mem_combineSub.mpr ⟨h2.subset hj, Or.inr hj⟩)⟩
  · rintro ⟨⟨hzm, hall1⟩, _, hall2⟩
    refine ⟨hzm, fun j hj => ?_⟩
    obtain ⟨_, hj1 | hj2⟩ := mem_combineSub.mp hj
    · exact hall1 j hj1
    · exact hall2 j hj2

def finGen (js : List ℕ) : Set (Set α) :=
  {Y | ∃ sub : List ℕ, sub.Sublist js ∧ D.mem Y ∧ Y = interFrom P D.master sub}

theorem finGen_mono {js js' : List ℕ} (h : js.Sublist js') : finGen P js ⊆ finGen P js
    ' :=
  fun _ ⟨sub, hsub, hD, hY⟩ => ⟨sub, hsub.trans h, hD, hY⟩

theorem finGen_sub_mem {js : List ℕ} {Y : Set α} : Y ∈ finGen P js → D.mem Y :=
  fun ⟨_, _, hD, _⟩ => hD

theorem finGen_sub_master {js : List ℕ} {Y : Set α} (h : Y ∈ finGen P js) : Y ⊆ D.
    master :=
  D.sub_master (finGen_sub_mem P h)

theorem master_mem_finGen (js : List ℕ) : D.master ∈ finGen P js :=
  ⟨[], List.nil_sublist js, D.master_mem, rfl⟩

theorem principal_mem_finGen {js : List ℕ} {i : ℕ} (hi : i ∈ js) : P.X i ∈ finGen P js
     := by
  refine ⟨[i], (List.singleton_sublist).mpr hi, P.mem_X i, ?_⟩
  apply Set.ext
  intro z
  rw [mem_interFrom]
  constructor
  · intro hz
    exact ⟨D.sub_master (P.mem_X i) hz,
      fun j hj => by rw [List.mem_singleton] at hj; subst hj; exact hz⟩
  · rintro ⟨_, hall⟩
    exact hall i (List.mem_singleton.mpr rfl)

def finGenSys (js : List ℕ) : NeighborhoodSystem α where
  mem Y := Y ∈ finGen P js
  master := D.master
  master_nonempty := D.master_nonempty
  master_mem := master_mem_finGen P js
  inter_mem := by
    rintro X Y Z ⟨sub1, h1, hDX, hX⟩ ⟨sub2, h2, hDY, hY⟩ ⟨sub3, h3, hDZ, hZ⟩ hZsub
    exact ⟨combineSub js sub1 sub2, combineSub_sublist js sub1 sub2,
      D.inter_mem hDX hDY hDZ hZsub, by
```

```
        rw [interFrom_combineSub_eq P h1 h2, hX, hY]⟩
  sub_master := fun ⟨sub, _, _, hY⟩ => hY ▸ interFrom_subset P

@[simp] theorem mem_finGenSys {js : List ℕ} {Y : Set α} :
    (finGenSys P js).mem Y ↔ Y ∈ finGen P js := Iff.rfl

theorem finGenSys_subsystem (js : List ℕ) : finGenSys P js ? D where
  master_eq := rfl
  sub := finGen_sub_mem P
  inter_closed := by
    rintro X Y ⟨sub1, h1, hDX, hX⟩ ⟨sub2, h2, hDY, hY⟩ hXY
    exact ⟨combineSub js sub1 sub2, combineSub_sublist js sub1 sub2, hXY, by
      rw [interFrom_combineSub_eq P h1 h2, hX, hY]⟩

theorem interFrom_cons_eq (A : Set α) (j : ℕ) (sub : List ℕ) :
    interFrom P A (j :: sub) = P.X j ∩ interFrom P A sub := by
  apply Set.ext
  intro z
  rw [Set.mem_inter_iff, mem_interFrom, mem_interFrom, List.forall_mem_cons]
  tauto

theorem finGen_le_iff_forall_mem {D' : NeighborhoodSystem α} (hD' : D' ? D) (js : List
    ℕ) :
    finGen P js ⊆ D'.mem ↔ ∀ i ∈ js, D'.mem (P.X i) := by
  induction js with
  | nil =>
    refine ⟨fun _ i hi => absurd hi List.not_mem_nil, fun _ => ?_⟩
    rintro Y ⟨sub, hsub, _, hYeq⟩
    rw [List.eq_nil_of_sublist_nil hsub] at hYeq
    rw [hYeq, show interFrom P D.master ([] : List ℕ) = D.master from rfl, ← hD'.
   master_eq]
    exact D'.master_mem
  | cons j js' ih =>
    rw [List.forall_mem_cons]
    constructor
    · intro hsub
      refine ⟨hsub (principal_mem_finGen P List.mem_cons_self), ?_⟩
      exact ih.mp ((finGen_mono P (List.sublist_cons_self j js')).trans hsub)
    · intro hall
      have hj := hall.1
      have hFinjs' : finGen P js' ⊆ D'.mem := ih.mpr hall.2
      rintro Y ⟨sub, hsub, hDY, hYeq⟩
      cases hsub with
      | cons _ hsub' => exact hFinjs' ⟨sub, hsub', hDY, hYeq⟩
      | cons_cons _ hsub' =>
        rename_i sub2
        rw [interFrom_cons_eq P D.master j sub2] at hYeq
        set Y2 := interFrom P D.master sub2 with hY2def
        have hY_sub_Y2 : Y ⊆ Y2 := hYeq ▸ Set.inter_subset_right
        have hDY2 : D.mem Y2 := interFrom_mem_of_witness P hDY hY_sub_Y2 D.master_mem
        have hY2mem : D'.mem Y2 := hFinjs' ⟨sub2, hsub', hDY2, rfl⟩
        have hXYmem : D.mem (P.X j ∩ Y2) := hYeq ▸ hDY
        exact hYeq ▸ hD'.inter_closed hj hY2mem hXYmem

theorem finGen_append_le_iff {D' : NeighborhoodSystem α} (hD' : D' ? D) (js1 js2 :
    List ℕ) :
```

```
    finGen P (js1 ++ js2) ⊆ D'.mem ↔ finGen P js1 ⊆ D'.mem ∧ finGen P js2 ⊆ D'.mem :=
     by
  rw [finGen_le_iff_forall_mem P hD', finGen_le_iff_forall_mem P hD',
    finGen_le_iff_forall_mem P hD', List.forall_mem_append]

def nbhdGen (js : List ℕ) : Set (List ℕ) := {js' | finGen P js ⊆ finGen P js'}

@[simp] theorem mem_nbhdGen {js js' : List ℕ} :
    js' ∈ nbhdGen P js ↔ finGen P js ⊆ finGen P js' := Iff.rfl

theorem nbhdGen_antitone {js js' : List ℕ} (h : finGen P js ⊆ finGen P js') :
    nbhdGen P js' ⊆ nbhdGen P js := fun _ hk => h.trans hk

theorem self_mem_nbhdGen (js : List ℕ) : js ∈ nbhdGen P js := (mem_nbhdGen P).mpr
    subset_rfl

theorem nbhdGen_inter (js1 js2 : List ℕ) :
    nbhdGen P js1 ∩ nbhdGen P js2 = nbhdGen P (js1 ++ js2) := by
  apply Set.ext
  intro js'
  simp only [mem_nbhdGen, Set.mem_inter_iff]
  exact (finGen_append_le_iff P (finGenSys_subsystem P js') js1 js2).symm

def SubD (P : ComputablePresentation D) : NeighborhoodSystem (List ℕ) where
  mem N := ∃ js, N = nbhdGen P js
  master := nbhdGen P []
  master_nonempty := ⟨[], self_mem_nbhdGen P []⟩
  master_mem := ⟨[], rfl⟩
  inter_mem := by
    rintro N1 N2 N3 ⟨js1, rfl⟩ ⟨js2, rfl⟩ ⟨js3, rfl⟩ _
    exact ⟨js1 ++ js2, nbhdGen_inter P js1 js2⟩
  sub_master := by
    rintro N ⟨js, rfl⟩
    exact nbhdGen_antitone P (finGen_mono P (List.nil_sublist js))

theorem finGen_eq_of_nbhdGen_eq {a b : List ℕ} (h : nbhdGen P a = nbhdGen P b) :
    finGen P a = finGen P b :=
  Set.Subset.antisymm ((Set.ext_iff.mp h b).mpr (self_mem_nbhdGen P b))
    ((Set.ext_iff.mp h a).mp (self_mem_nbhdGen P a))

theorem nbhdGen_eq_iff {a b : List ℕ} : nbhdGen P a = nbhdGen P b ↔ finGen P a =
    finGen P b := by
  refine ⟨finGen_eq_of_nbhdGen_eq P, fun h => ?_⟩
  unfold nbhdGen
  rw [h]

@[simp] theorem mem_SubD {N : Set (List ℕ)} : (SubD P).mem N ↔ ∃ js, N = nbhdGen P js
    := Iff.rfl

@[simp] theorem SubD_master : (SubD P).master = nbhdGen P [] := rfl

theorem exists_common_witness (x : (SubD P).Element) {js : List ℕ}
    (h : ∀ i ∈ js, ∃ js', x.mem (nbhdGen P js') ∧ P.X i ∈ finGen P js') :
    ∃ js0, x.mem (nbhdGen P js0) ∧ finGen P js ⊆ finGen P js0 := by
  induction js with
  | nil => exact ⟨[], SubD_master P ▸ x.master_mem, subset_rfl⟩
```

```
  | cons j js' ih =>
    obtain ⟨jsj, hxj, hjmem⟩ := h j List.mem_cons_self
    obtain ⟨js0', hx0', hsub0'⟩ := ih (fun i hi => h i (List.mem_cons_of_mem j hi))
    refine ⟨jsj ++ js0', nbhdGen_inter P jsj js0' ▸ x.inter_mem hxj hx0',
      (finGen_le_iff_forall_mem P (finGenSys_subsystem P (jsj ++ js0')) (j :: js')).
    mpr
        (List.forall_mem_cons.mpr ⟨?_, ?_⟩)⟩
    · exact finGen_mono P (List.sublist_append_left jsj js0') hjmem
    · exact fun i hi =>
        finGen_mono P (List.sublist_append_right jsj js0') (hsub0' (
    principal_mem_finGen P hi))

theorem interFrom_append_eq (A : Set α) (l1 l2 : List ℕ) :
    interFrom P A (l1 ++ l2) = interFrom P A l1 ∩ interFrom P A l2 := by
  apply Set.ext
  intro z
  rw [Set.mem_inter_iff, mem_interFrom, mem_interFrom, mem_interFrom, List.
    forall_mem_append]
  tauto

def ofSubsystem (D' : NeighborhoodSystem α) (hD' : D' ? D) : (SubD P).Element where
  mem N := ∃ js, N = nbhdGen P js ∧ ∀ i ∈ js, D'.mem (P.X i)
  sub := fun ⟨js, hN, _⟩ => ⟨js, hN⟩
  master_mem := ⟨[], rfl, fun i hi => absurd hi List.not_mem_nil⟩
  inter_mem := by
    rintro N1 N2 ⟨js1, rfl, h1⟩ ⟨js2, rfl, h2⟩
    exact ⟨js1 ++ js2, nbhdGen_inter P js1 js2, List.forall_mem_append.mpr ⟨h1, h2⟩⟩
  up_mem := by
    rintro N1 N2 ⟨js1, rfl, h1⟩ ⟨js2, rfl⟩ hsub
    have hle : finGen P js2 ⊆ finGen P js1 := hsub (self_mem_nbhdGen P js1)
    exact ⟨js2, rfl, (finGen_le_iff_forall_mem P hD' js2).mp
      (hle.trans ((finGen_le_iff_forall_mem P hD' js1).mpr h1))⟩

theorem mem_ofSubsystem_nbhdGen {D' : NeighborhoodSystem α} (hD' : D' ? D) (js : List
    ℕ) :
    (ofSubsystem P D' hD').mem (nbhdGen P js) ↔ ∀ i ∈ js, D'.mem (P.X i) := by
  constructor
  · rintro ⟨js', hjseq, hall⟩
    have hfin : finGen P js = finGen P js' := (nbhdGen_eq_iff P).mp hjseq
    refine (finGen_le_iff_forall_mem P hD' js).mp ?_
    rw [hfin]
    exact (finGen_le_iff_forall_mem P hD' js').mpr hall
  · exact fun hall => ⟨js, rfl, hall⟩

def toSubsystemSys (x : (SubD P).Element) : NeighborhoodSystem α where
  mem Y := ∃ js, x.mem (nbhdGen P js) ∧ Y ∈ finGen P js
  master := D.master
  master_nonempty := D.master_nonempty
  master_mem := ⟨[], x.master_mem, master_mem_finGen P []⟩
  inter_mem := by
    rintro X Y Z ⟨js1, hx1, hX⟩ ⟨js2, hx2, hY⟩ ⟨js3, _, hZ⟩ hZsub
    have hDX := finGen_sub_mem P hX
    have hDY := finGen_sub_mem P hY
    have hDZ := finGen_sub_mem P hZ
    obtain ⟨sub1, hsub1, _, hXeq⟩ := hX
    obtain ⟨sub2, hsub2, _, hYeq⟩ := hY
```

```
    refine ⟨js1 ++ js2, nbhdGen_inter P js1 js2 ▶ x.inter_mem hx1 hx2,
      sub1 ++ sub2, hsub1.append hsub2, D.inter_mem hDX hDY hDZ hZsub, ?_⟩
    rw [interFrom_append_eq, hXeq, hYeq]
  sub_master := fun ⟨_, _, hY⟩ => finGen_sub_master P hY

theorem toSubsystemSys_subsystem (x : (SubD P).Element) : toSubsystemSys P x ? D where
  master_eq := rfl
  sub := fun ⟨_, _, hY⟩ => finGen_sub_mem P hY
  inter_closed := by
    rintro X Y ⟨js1, hx1, hX⟩ ⟨js2, hx2, hY⟩ hXY
    obtain ⟨sub1, hsub1, _, hXeq⟩ := hX
    obtain ⟨sub2, hsub2, _, hYeq⟩ := hY
    refine ⟨js1 ++ js2, nbhdGen_inter P js1 js2 ▶ x.inter_mem hx1 hx2,
      sub1 ++ sub2, hsub1.append hsub2, hXY, ?_⟩
    rw [interFrom_append_eq, hXeq, hYeq]

theorem ofSubsystem_toSubsystem (x : (SubD P).Element) :
    ofSubsystem P (toSubsystemSys P x) (toSubsystemSys_subsystem P x) = x := by
  apply Element.ext
  intro N
  constructor
  · rintro ⟨js, rfl, hall⟩
    obtain ⟨js0, hx0, hsub0⟩ := exists_common_witness P x hall
    exact x.up_mem hx0 ⟨js, rfl⟩ (nbhdGen_antitone P hsub0)
  · intro hx
    obtain ⟨js, rfl⟩ := x.sub hx
    exact ⟨js, rfl, fun i hi => ⟨js, hx, principal_mem_finGen P hi⟩⟩

theorem mem_nbhdGen_iff (x : (SubD P).Element) (js : List ℕ) :
    x.mem (nbhdGen P js) ↔ ∀ i ∈ js, (toSubsystemSys P x).mem (P.X i) := by
  conv_lhs => rw [← ofSubsystem_toSubsystem P x]
  exact mem_ofSubsystem_nbhdGen P (toSubsystemSys_subsystem P x) js

def toSubsystem (x : (SubD P).Element) : {D' : NeighborhoodSystem α // D' ? D} :=
  ⟨toSubsystemSys P x, toSubsystemSys_subsystem P x⟩

theorem toSubsystem_ofSubsystem_mem (D' : NeighborhoodSystem α) (hD' : D' ? D) (Y :
    Set α) :
    (toSubsystemSys P (ofSubsystem P D' hD')).mem Y ↔ D'.mem Y := by
  constructor
  · rintro ⟨js, ⟨js', hjseq, hall⟩, hY⟩
    have hfin : finGen P js = finGen P js' := (nbhdGen_eq_iff P).mp hjseq
    exact (finGen_le_iff_forall_mem P hD' js').mpr hall (hfin ▶ hY)
  · intro hY
    obtain ⟨n, hn⟩ := P.surj (hD'.sub hY)
    refine ⟨[n], ⟨[n], rfl, fun i hi => ?_⟩, hn ▶ principal_mem_finGen P (List.
    mem_singleton.mpr rfl)⟩
    rw [List.mem_singleton] at hi
    subst hi
    rw [hn]
    exact hY

theorem toSubsystem_ofSubsystem (D' : NeighborhoodSystem α) (hD' : D' ? D) :
    toSubsystem P (ofSubsystem P D' hD') = ⟨D', hD'⟩ :=
  Subtype.ext (NeighborhoodSystem.ext (toSubsystem_ofSubsystem_mem P D' hD') hD'.
    master_eq.symm)
```

```
end DomainTheory.NeighbourhoodSystems
```

— `QBody`, `QFuel`, `TreeVal`, `Q′X`
— `Q2X`, `Q′xPresentation`
Assembles those tools into the Exercise 8.15 development (order iso, presentations, U-case).

`Exercise_8_15.lean`

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    SubsystemDomain

@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem

theorem exercise_8_15 {α : Type*} {D : NeighborhoodSystem α} (hD : D.
    IsEffectivelyGiven) :
    ∃ V : NeighborhoodSystem (List ℕ), V.IsEffectivelyGiven ∧
      Nonempty (V.Element ≃o {D' : NeighborhoodSystem α // D' ? D}) :=
  subsystem_isEffectivelyGiven_of_isEffectivelyGiven hD

end
```

NeighbourhoodSystems/RetractsOfTheUniversalDomain/finGen.lean
The tip then assembles those tools into Scott's statement.
— `exercise_8_15`

3.9.18 Exercise 8.16 — order of projections

`Exercise_8_16.lean`

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    FixedNbhdFinitaryOrder

@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap Domain.
    Recursive

theorem exercise_8_16 {α : Type*} {E : NeighborhoodSystem α} :
    (∀ {a b : ApproximableMap E E}, FinitaryProjection a → FinitaryProjection b →
        (a ≤ b ↔ fixedNbhd a ? fixedNbhd b)) ∧
      (∀ {P : ComputablePresentation E} {a : ApproximableMap E E},
        ComputableMap P P a → (fixedNbhd a).IsEffectivelyGiven) :=
  @exercise_8_16_assembly α E

end
```

EXERCISE 8.16. For finitary projections $a : E \to E$, write

$$D_a = \{X \in E \mid X \sqsubseteq aX\}$$

(cf. 8.5.). Show that for any two such projections $a, b : E \to E$ we have

$$a \sqsubseteq b \quad \text{iff} \quad D_a \lhd D_b.$$

(This fills in the gap at the end of the proof of 8.6.) Also finish off the proof of 8.8 by showing that if E is effectively given and $a : E \to E$ is computable, then D_a is effectively given.

Tip summary The tip packages the order correspondence for finitary projections with the effectivity of their fixed neighbourhoods.

Development Matches the order of finitary projections with subdomain order and records effectivity of `D_a`.

The tip then assembles those tools into Scott's statement.

— `exercise_8_16`

3.9.19 Exercise 8.17 — explicit embeddings into U

`ProjPair.lean`

```
module

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_6

@[expose] public section

section
universe u v w

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap Subsystem

variable {α : Type u} {β : Type v} {? : Type w}

structure ProjPair (D : NeighborhoodSystem α) (E : NeighborhoodSystem β) where

  inj : ApproximableMap D E

  proj : ApproximableMap E D

  proj_comp_inj : proj.comp inj = idMap D

  inj_comp_proj_le : inj.comp proj ≤ idMap E

namespace ProjPair
```

```
def comp {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}
    {F : NeighborhoodSystem ?} (p1 : ProjPair D E) (p2 : ProjPair E F) :
    ProjPair D F where
  inj := p2.inj.comp p1.inj
  proj := p1.proj.comp p2.proj
  proj_comp_inj := by
    show (p1.proj.comp p2.proj).comp (p2.inj.comp p1.inj) = idMap D
    rw [comp_assoc, ← comp_assoc p2.proj p2.inj p1.inj, p2.proj_comp_inj, idMap_comp,
      p1.proj_comp_inj]
  inj_comp_proj_le := by
    show (p2.inj.comp p1.inj).comp (p1.proj.comp p2.proj) ≤ idMap F
    rw [comp_assoc, ← comp_assoc p1.inj p1.proj p2.proj]
    calc p2.inj.comp ((p1.inj.comp p1.proj).comp p2.proj)
        ≤ p2.inj.comp ((idMap E).comp p2.proj) :=
          comp_mono_gen le_rfl (comp_mono_gen p1.inj_comp_proj_le le_rfl)
      _ = p2.inj.comp p2.proj := by rw [idMap_comp]
      _ ≤ idMap F := p2.inj_comp_proj_le

def ofIso {D : NeighborhoodSystem α} {E : NeighborhoodSystem β} (e : DomainIso D E) :
    ProjPair D E where
  inj := ApproximableMap.ofIso e
  proj := ApproximableMap.ofIso e.symm
  proj_comp_inj := by
    have heq : ∀ x, ((ApproximableMap.ofIso e.symm).comp (ApproximableMap.ofIso e)).
    toElementMap x
        = (idMap D).toElementMap x := by
      intro x
      rw [toElementMap_comp, toElementMap_ofIso, toElementMap_ofIso, OrderIso.
    symm_apply_apply,
        toElementMap_idMap]
    exact le_antisymm (le_iff_toElementMap_le.mpr fun x => (heq x).le)
      (le_iff_toElementMap_le.mpr fun x => (heq x).ge)
  inj_comp_proj_le := by
    have heq : ∀ y, ((ApproximableMap.ofIso e).comp (ApproximableMap.ofIso e.symm)).
    toElementMap y
        = (idMap E).toElementMap y := by
      intro y
      rw [toElementMap_comp, toElementMap_ofIso, toElementMap_ofIso, OrderIso.
    apply_symm_apply,
        toElementMap_idMap]
    exact le_iff_toElementMap_le.mpr fun y => (heq y).le

def ofSubsystem {D E : NeighborhoodSystem α} (h : D ? E) : ProjPair D E where
  inj := h.inj
  proj := h.proj
  proj_comp_inj := h.proj_comp_inj
  inj_comp_proj_le := h.inj_comp_proj_le

end ProjPair

end DomainTheory.NeighbourhoodSystems
end
```

Exercise_8_17.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    EmbeddingsIntoU

@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem

theorem exercise_8_17 :
    IsUniversal.{0} V ∧
      (prod U U ? U) ∧
      (sum U U U_mem_nonempty U_mem_nonempty ? U) ∧
      (funSpace U U ? U) :=
  ⟨V.isUniversal, prodUU_trianglelefteq_U, sumUU_trianglelefteq_U,
    funSpaceUU_trianglelefteq_U⟩

end
```

EXERCISE 8.17. Find explicitly (if possible) the projection pairs for $\mathcal{U}+\mathcal{U}$, $\mathcal{U}\times\mathcal{U}$, and $\mathcal{U}\to\mathcal{U}$ needed for 8.9. Are any of these domains isomorphic with $\mathcal{U}$? (The author does not know a really good construction for $\mathcal{U}\to\mathcal{U}$.) Find a universal domain $V\neq\mathcal{U}$.

Tip summary The tip asserts universality of `V` together with the product/sum/function-space embeddings into `U`.

Development Proves `V` is universal and records the standard embeddings into `U`.
— `ProjPair` and composition/iso/subsystem constructors
— universality and the concrete `U`/`V` embeddings
The tip then assembles those tools into Scott's statement.
— `exercise_8_17`

3.9.20 Exercise 8.18 — missing proofs of 8.10

`Exercise_8_18.lean`

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    ProjectionCombinators

@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap

theorem exercise_8_18 {a b : ApproximableMap U U} (ha : IsProjection a) (hb :
    IsProjection b) :
    (IsProjection (sumComb a b) ∧ IsProjection (prodComb a b) ∧ IsProjection (
    arrowComb a b)) ∧
      (FinitaryProjection a → FinitaryProjection b →
        FinitaryProjection (sumComb a b) ∧ FinitaryProjection (prodComb a b) ∧
          FinitaryProjection (arrowComb a b)) :=
```

```
  exercise_8_18_assembly ha hb

end
```

EXERCISE 8.18. Many of the cases of 8.10 were left unproved. Please establish these assertions explicitly.

Tip summary The tip asserts that the sum/product/arrow combinators preserve projections and finitary projections.

Development Shows sum/product/arrow combinators preserve (finitary) projections.
The tip then assembles those tools into Scott's statement.
— `exercise_8_18`

3.9.21 Exercise 8.19 — closure under sum and product

`Exercise_8_19.lean`

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    SumProdRetracts

@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap Exercise326

universe u

theorem exercise_8_19 {α : Type u} {E : NeighborhoodSystem α}
    (hE : ∀ X, E.mem X → X.Nonempty) (hT : TD ? E) (hArrow : funSpace E E ? E) :
    sum E E hE hE ? E ∧ prod E E ? E :=
  exercise_8_19_assembly hE hT hArrow

end
```

EXERCISE 8.19. Suppose we know both

$$T \quad \text{and} \quad E \to E \trianglelefteq E\,.$$

Does it follow that $E + E$ and $E \times E \trianglelefteq E$?

Tip summary The tip asserts closure of $\trianglelefteq$ under sum and product under Scott's hypotheses.

Development Closes $\trianglelefteq$ under sum and product given a terminal object and a function-space retract.
The tip then assembles those tools into Scott's statement.
— `exercise_8_19`

3.9.22 Exercise 8.20 — self-embeddings of a domain

Exercise_8_20.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    DiagonalRetracts

@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem

theorem exercise_8_20 {α : Type*} (D : NeighborhoodSystem α) :
    D ? prod D D ∧ D ? funSpace D D :=
  exercise_8_20_assembly D

end
```

EXERCISE 8.20. For any system we know $D \trianglelefteq D + D$, but what about

$$D \trianglelefteq D \times D \quad \text{and} \quad D \trianglelefteq D \to D\,?$$

Would these projections be computable if D is effectively given? Are there more than one projection pair in each case?

Tip summary The tip asserts $D \trianglelefteq D \times D$ and $D \trianglelefteq D \to D$ for every domain D.

Development Proves the unconditional self-embeddings $D \trianglelefteq D \times D$ and $D \trianglelefteq D \to D$.
The tip then assembles those tools into Scott's statement.
— `exercise_8_20`

3.9.23 Exercise 8.21 — lists of a projection

Exercise_8_21.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.ASharp
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    ASharp_more

@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap

theorem exercise_8_21 {a : ApproximableMap U U} (ha : FinitaryProjection a) :
    FinitaryProjection (aSharp a) :=
  isFinitaryProjection_aSharp ha

end
```

EXERCISE 8.21. Using the fixed-point construction, show that there is a continuous and computable operator $\lambda a.\, a^{\S}$, such that if a is a finitary projection of U, then

$$D_{a^{\S}} \cong (D_a)^{\S} .$$

Tip summary The tip asserts that the sharp of a finitary projection is again a finitary projection.

Development Develops the sharp construction and shows it yields a finitary projection.
— `aSharp` projection/computability companions and Ex 8.25 closing
The tip then assembles those tools into Scott's statement.
— `exercise_8_21`

3.9.24 Exercise 8.22 — comparing B and C

Which of the two relations hold:

$$B \trianglelefteq C \quad \text{or} \quad C \trianglelefteq B \,?$$

Or do they both hold? In general if we use domain equations

$$D = T(D) + S(D) , \quad \text{and}$$

$$E = T(E) ,$$

will $E \trianglelefteq D$ hold? What projections do you see in the examples in 6.2?

Tip summary The tip asserts the concrete embedding relation between Scott's examples `C` and `B`.

Development Compares Scott's concrete examples `B` and `C`.

`ExampleC_le_B.lean`

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_17
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Proposition_6_12
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_29
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_8
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Lemma_3_6

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap ExampleB Example44 Example62
```

```
namespace Exercise822

theorem C_nonempty : ∀ X, C.mem X → X.Nonempty := by
  rintro X (⟨σ, rfl⟩ | ⟨σ, rfl⟩)
  · exact ⟨σ, List.prefix_rfl⟩
  · exact ⟨σ, rfl⟩

def enc : Str → Str
  | [] => []
  | b :: σ => b :: b :: enc σ

def encC (σ : Str) : Str := enc σ ++ [true, false]

@[simp] theorem enc_nil : enc ([] : Str) = [] := rfl

@[simp] theorem enc_cons (b : Bool) (σ : Str) : enc (b :: σ) = b :: b :: enc σ := rfl

theorem encC_cons (b : Bool) (σ : Str) : encC (b :: σ) = b :: b :: encC σ := by
  simp [encC]

theorem encC_nil : encC ([] : Str) = [true, false] := rfl

theorem enc_append (σ τ : Str) : enc (σ ++ τ) = enc σ ++ enc τ := by
  induction σ with
  | nil => simp
  | cons b σ' ih => simp [ih]

theorem enc_length (σ : Str) : (enc σ).length = 2 * σ.length := by
  induction σ with
  | nil => simp
  | cons b σ' ih => simp [ih]; ring

theorem encC_length (σ : Str) : (encC σ).length = 2 * σ.length + 2 := by
  simp [encC, enc_length]

theorem encC_prefix_encC_iff {σ τ : Str} : encC σ <+: encC τ ↔ σ = τ := by
  constructor
  · induction σ generalizing τ with
    | nil =>
      intro h
      cases τ with
      | nil => rfl
      | cons c τ' =>
        exfalso
        rw [encC_nil, encC_cons] at h
        obtain ⟨rfl, h2⟩ := List.cons_prefix_cons.mp h
        obtain ⟨h3, -⟩ := List.cons_prefix_cons.mp h2
        exact absurd h3 (by decide)
    | cons b σ' ih =>
      intro h
      cases τ with
      | nil =>
        exfalso
        rw [encC_cons, encC_nil] at h
        have hlen := h.length_le
        simp only [List.length_cons, List.length_nil, encC_length] at hlen
```

```
        omega
      | cons c τ' =>
        rw [encC_cons, encC_cons] at h
        obtain ⟨rfl, h2⟩ := List.cons_prefix_cons.mp h
        obtain ⟨-, h3⟩ := List.cons_prefix_cons.mp h2
        rw [ih h3]
  · rintro rfl; exact List.prefix_rfl

theorem encC_injective {σ τ : Str} (h : encC σ = encC τ) : σ = τ :=
  encC_prefix_encC_iff.mp (h ▶ List.prefix_rfl)

theorem enc_prefix_of_prefix {σ τ : Str} (h : σ <+: τ) : enc σ <+: enc τ := by
  obtain ⟨t, rfl⟩ := h
  rw [enc_append]
  exact ⟨enc t, rfl⟩

theorem enc_prefix_encC_iff {? σ : Str} : enc ? <+: encC σ ↔ ? <+: σ := by
  constructor
  · induction ? generalizing σ with
    | nil => intro _; exact List.nil_prefix
    | cons b ?' ih =>
      intro h
      cases σ with
      | nil =>
        exfalso
        rw [enc_cons, encC_nil] at h
        obtain ⟨rfl, h2⟩ := List.cons_prefix_cons.mp h
        obtain ⟨h3, -⟩ := List.cons_prefix_cons.mp h2
        exact absurd h3 (by decide)
      | cons c σ' =>
        rw [enc_cons, encC_cons] at h
        obtain ⟨rfl, h2⟩ := List.cons_prefix_cons.mp h
        obtain ⟨-, h3⟩ := List.cons_prefix_cons.mp h2
        rw [List.cons_prefix_cons]
        exact ⟨rfl, ih h3⟩
  · intro h
    calc enc ? <+: enc σ := enc_prefix_of_prefix h
      _ <+: encC σ := ⟨[true, false], rfl⟩

theorem enc_prefix_iff {σ τ : Str} : enc σ <+: enc τ ↔ σ <+: τ := by
  refine ⟨?_, enc_prefix_of_prefix⟩
  induction σ generalizing τ with
  | nil => intro _; exact List.nil_prefix
  | cons b σ' ih =>
    cases τ with
    | nil =>
      intro h
      rw [enc_cons, enc_nil] at h
      obtain ⟨t, ht⟩ := h
      simp at ht
    | cons c τ' =>
      intro h
      rw [enc_cons, enc_cons, List.cons_prefix_cons, List.cons_prefix_cons] at h
      obtain ⟨rfl, -, h3⟩ := h
      rw [List.cons_prefix_cons]
      exact ⟨rfl, ih h3⟩
```

```
theorem enc_injective {σ τ : Str} (h : enc σ = enc τ) : σ = τ := by
  have h1 : σ <+: τ := enc_prefix_iff.mp ⟨[], by simpa using h⟩
  have h2 : τ <+: σ := enc_prefix_iff.mp ⟨[], by simpa using h.symm⟩
  exact h1.eq_of_length (h1.length_le.antisymm h2.length_le)

def memD' (X : Set Str) : Prop := (∃ σ, X = cone (enc σ)) ∨ (∃ σ, X = cone (encC σ))

theorem D'_nestedOrDisjoint : NestedOrDisjoint memD' := by
  rintro X Y (⟨σ, rfl⟩ | ⟨σ, rfl⟩) (⟨τ, rfl⟩ | ⟨τ, rfl⟩)
  · exact cone_trichotomy (enc σ) (enc τ)
  · exact cone_trichotomy (enc σ) (encC τ)
  · exact cone_trichotomy (encC σ) (enc τ)
  · exact cone_trichotomy (encC σ) (encC τ)

def D' : NeighborhoodSystem Str :=
  NeighborhoodSystem.ofNestedOrDisjoint memD' Set.univ ⟨[], Set.mem_univ _⟩
    (Or.inl ⟨[], by rw [enc_nil, cone_nil]⟩)
    D'_nestedOrDisjoint (by rintro X (⟨σ, rfl⟩ | ⟨σ, rfl⟩) <;> exact Set.subset_univ _)

@[simp] theorem D'_mem {X : Set Str} : D'.mem X ↔ memD' X := Iff.rfl

@[simp] theorem D'_master : D'.master = (Set.univ : Set Str) := rfl

theorem D'_subsystem_B : D' ? B where
  master_eq := rfl
  sub := by rintro X (⟨σ, rfl⟩ | ⟨σ, rfl⟩) <;> exact ⟨_, rfl⟩
  inter_closed := by
    rintro X Y hX hY hBXY
    rcases D'_nestedOrDisjoint hX hY with h | h | h
    · rw [Set.inter_eq_left.mpr h]; exact hX
    · rw [Set.inter_eq_right.mpr h]; exact hY
    · rw [h] at hBXY; exact absurd (B_nonempty ∅ hBXY) (by simp)

theorem cone_encC_subset_cone_enc_iff {σ τ : Str} : cone (encC σ) ⊆ cone (enc τ) ↔ τ
    <+: σ := by
  rw [cone_subset_cone, enc_prefix_encC_iff]

theorem cone_encC_subset_iff {σ τ : Str} : cone (encC σ) ⊆ cone (encC τ) ↔ σ = τ :=
    by
  rw [cone_subset_cone, encC_prefix_encC_iff, eq_comm]

theorem cone_enc_subset_iff {σ τ : Str} : cone (enc σ) ⊆ cone (enc τ) ↔ τ <+: σ := by
  rw [cone_subset_cone, enc_prefix_iff]

theorem cone_ne_singleton (σ τ : Str) : cone σ = ({τ} : Set Str) := by
  intro h
  have h1 : σ ∈ cone σ := List.prefix_rfl
  have h2 : σ ++ [true] ∈ cone σ := ⟨[true], rfl⟩
  rw [h] at h1 h2
  simp only [Set.mem_singleton_iff] at h1 h2
  exact absurd (h2.trans h1.symm) (by simp)

theorem not_encC_prefix_enc {σ τ : Str} : ¬ encC σ <+: enc τ := by
  induction σ generalizing τ with
  | nil =>
```

```
    cases τ with
    | nil => simp [encC_nil]
    | cons c τ' =>
      rw [encC_nil, enc_cons]
      intro h
      obtain ⟨rfl, h2⟩ := List.cons_prefix_cons.mp h
      obtain ⟨h3, -⟩ := List.cons_prefix_cons.mp h2
      exact absurd h3 (by decide)
  | cons b σ' ih =>
    cases τ with
    | nil =>
      rw [encC_cons, enc_nil]
      intro h
      exact absurd h.length_le (by simp)
    | cons c τ' =>
      rw [encC_cons, enc_cons]
      intro h
      obtain ⟨rfl, h2⟩ := List.cons_prefix_cons.mp h
      obtain ⟨-, h3⟩ := List.cons_prefix_cons.mp h2
      exact ih h3

theorem enc_ne_encC (σ τ : Str) : enc σ = encC τ := by
  intro h
  exact not_encC_prefix_enc (σ := τ) (τ := σ) (h ▶ List.prefix_rfl)

theorem not_cone_enc_subset_cone_encC {σ τ : Str} : ¬ cone (enc σ) ⊆ cone (encC τ) :=
    by
  rw [cone_subset_cone]; exact not_encC_prefix_enc

def fromD' (y : D'.Element) : C.Element where
  mem X := (∃ σ, y.mem (cone (enc σ)) ∧ X = cone σ) ∨ (∃ σ, y.mem (cone (encC σ)) ∧ X
    = ({σ} : Set Str))
  sub := by
    rintro X (⟨σ, -, rfl⟩ | ⟨σ, -, rfl⟩)
    · exact memC_cone σ
    · exact memC_singleton σ
  master_mem := by
    refine Or.inl ⟨[], ?_, cone_nil.symm⟩
    rw [enc_nil, cone_nil, ← D'_master]
    exact y.master_mem
  inter_mem := by
    rintro X X' (⟨σ, hσ, rfl⟩ | ⟨σ, hσ, rfl⟩) (⟨τ, hτ, rfl⟩ | ⟨τ, hτ, rfl⟩)
    ·
      have hy := y.inter_mem hσ hτ
      rcases cone_trichotomy (enc σ) (enc τ) with h | h | h
      · exact Or.inl ⟨σ, hσ, by rw [Set.inter_eq_left.mpr (cone_subset_cone.mpr
          (cone_enc_subset_iff.mp h))]⟩
      · exact Or.inl ⟨τ, hτ, by rw [Set.inter_eq_right.mpr (cone_subset_cone.mpr
          (cone_enc_subset_iff.mp h))]⟩
      · rw [h] at hy; exact absurd (B_nonempty ∅ (D'_subsystem_B.sub (y.sub hy))) (by
    simp)
    ·
      have hy := y.inter_mem hσ hτ
      rcases cone_trichotomy (enc σ) (encC τ) with h | h | h
      · exfalso
        exact absurd h not_cone_enc_subset_cone_encC
```

```
      · exact Or.inr ⟨τ, hτ, by rw [Set.inter_eq_right.mpr (singleton_subset_cone.mpr
          (cone_encC_subset_cone_enc_iff.mp h))]⟩
      · rw [h] at hy; exact absurd (B_nonempty ∅ (D'_subsystem_B.sub (y.sub hy))) (by
    simp)
    ·
      have hy := y.inter_mem hσ hτ
      rcases cone_trichotomy (encC σ) (enc τ) with h | h | h
      · exact Or.inr ⟨σ, hσ, by rw [Set.inter_eq_left.mpr (singleton_subset_cone.mpr
          (cone_encC_subset_cone_enc_iff.mp h))]⟩
      · exfalso
        exact absurd h not_cone_enc_subset_cone_encC
      · rw [h] at hy; exact absurd (B_nonempty ∅ (D'_subsystem_B.sub (y.sub hy))) (by
    simp)
    ·
      have hy := y.inter_mem hσ hτ
      by_cases hστ : σ = τ
      · subst hστ
        exact Or.inr ⟨σ, hσ, by rw [Set.inter_self]⟩
      · exfalso
        have h' : cone (encC σ) ∩ cone (encC τ) = ∅ := by
          rcases cone_trichotomy (encC σ) (encC τ) with h | h | h
          · exact absurd (cone_encC_subset_iff.mp h) hστ
          · exact absurd (cone_encC_subset_iff.mp h) (Ne.symm hστ)
          · exact h
        rw [h'] at hy
        exact absurd (B_nonempty ∅ (D'_subsystem_B.sub (y.sub hy))) (by simp)
  up_mem := by
    rintro X X' (⟨σ, hσ, rfl⟩ | ⟨σ, hσ, rfl⟩) hX' hsub
    · rcases hX' with ⟨?, rfl⟩ | ⟨?, rfl⟩
      · refine Or.inl ⟨?, ?_, rfl⟩
        have h?σ : ? <+: σ := cone_subset_cone.mp hsub
        exact y.up_mem hσ (Or.inl ⟨?, rfl⟩) (cone_enc_subset_iff.mpr h?σ)
      · exfalso
        have h1 : σ ∈ cone σ := List.prefix_rfl
        have h2 : σ ++ [true] ∈ cone σ := ⟨[true], rfl⟩
        have hσ?1 : σ = ? := hsub h1
        have hσ?2 : σ ++ [true] = ? := hsub h2
        exact absurd (hσ?2.trans hσ?1.symm) (by simp)
    · rcases hX' with ⟨?, rfl⟩ | ⟨?, rfl⟩
      · refine Or.inl ⟨?, ?_, rfl⟩
        have h?σ : ? <+: σ := singleton_subset_cone.mp hsub
        exact y.up_mem hσ (Or.inl ⟨?, rfl⟩) (cone_encC_subset_cone_enc_iff.mpr h?σ)
      · refine Or.inr ⟨?, ?_, rfl⟩
        have hσ? : σ = ? := hsub rfl
        exact y.up_mem hσ (Or.inr ⟨?, rfl⟩) (cone_encC_subset_iff.mpr hσ?)

def toD' (x : C.Element) : D'.Element where
  mem W := (∃ σ, x.mem (cone σ) ∧ W = cone (enc σ)) ∨ (∃ σ, x.mem ({σ} : Set Str) ∧ W
    = cone (encC σ))
  sub := by
    rintro W (⟨σ, -, rfl⟩ | ⟨σ, -, rfl⟩)
    · exact Or.inl ⟨σ, rfl⟩
    · exact Or.inr ⟨σ, rfl⟩
  master_mem := by
    rw [D'_master]
    refine Or.inl ⟨[], ?_, ?_⟩
```

```
  · rw [cone_nil]; exact x.master_mem
  · rw [enc_nil, cone_nil]
inter_mem := by
  rintro W W' (⟨σ, hσ, rfl⟩ | ⟨σ, hσ, rfl⟩) (⟨τ, hτ, rfl⟩ | ⟨τ, hτ, rfl⟩)
  ·
    have hx := x.inter_mem hσ hτ
    rcases cone_trichotomy σ τ with h | h | h
    · exact Or.inl ⟨σ, hσ, by rw [Set.inter_eq_left.mpr
        (cone_enc_subset_iff.mpr (cone_subset_cone.mp h))]⟩
    · exact Or.inl ⟨τ, hτ, by rw [Set.inter_eq_right.mpr
        (cone_enc_subset_iff.mpr (cone_subset_cone.mp h))]⟩
    · rw [h] at hx; exact absurd (C_nonempty ∅ (x.sub hx)) (by simp)
  ·
    have hx := x.inter_mem hσ hτ
    rcases singleton_cone_nd σ τ with h | h | h
    · exact Or.inr ⟨τ, hτ, by rw [Set.inter_eq_right.mpr
        (cone_encC_subset_cone_enc_iff.mpr (singleton_subset_cone.mp h))]⟩
    · exfalso
      have h1 : σ ∈ cone σ := List.prefix_rfl
      have h2 : σ ++ [true] ∈ cone σ := ⟨[true], rfl⟩
      have hστ1 : σ = τ := h h1
      have hστ2 : σ ++ [true] = τ := h h2
      exact absurd (hστ2.trans hστ1.symm) (by simp)
    · exfalso
      have h' : cone σ ∩ {τ} = ∅ := by rw [Set.inter_comm]; exact h
      rw [h'] at hx
      exact absurd (C_nonempty ∅ (x.sub hx)) (by simp)
  ·
    have hx := x.inter_mem hσ hτ
    rcases singleton_cone_nd τ σ with h | h | h
    · exact Or.inr ⟨σ, hσ, by rw [Set.inter_eq_left.mpr
        (cone_encC_subset_cone_enc_iff.mpr (singleton_subset_cone.mp h))]⟩
    · exfalso
      have h1 : τ ∈ cone τ := List.prefix_rfl
      have h2 : τ ++ [true] ∈ cone τ := ⟨[true], rfl⟩
      have hτσ1 : τ = σ := h h1
      have hτσ2 : τ ++ [true] = σ := h h2
      exact absurd (hτσ2.trans hτσ1.symm) (by simp)
    · exfalso
      rw [h] at hx
      exact absurd (C_nonempty ∅ (x.sub hx)) (by simp)
  ·
    have hx := x.inter_mem hσ hτ
    by_cases hστ : σ = τ
    · subst hστ
      exact Or.inr ⟨σ, hσ, by rw [Set.inter_self]⟩
    · exfalso
      have h' : ({σ} : Set Str) ∩ {τ} = ∅ := by
        ext w; simp only [Set.mem_inter_iff, Set.mem_singleton_iff, Set.
  mem_empty_iff_false,
          iff_false, not_and]
        rintro rfl; exact hστ
      rw [h'] at hx
      exact absurd (C_nonempty ∅ (x.sub hx)) (by simp)
up_mem := by
  rintro W W' (⟨σ, hσ, rfl⟩ | ⟨σ, hσ, rfl⟩) hW' hsub
```

```
    · rcases hW' with ⟨?, rfl⟩ | ⟨?, rfl⟩
      · refine Or.inl ⟨?, ?_, rfl⟩
        have h?σ : ? <+: σ := cone_enc_subset_iff.mp hsub
        exact x.up_mem hσ (memC_cone ?) (cone_subset_cone.mpr h?σ)
      · exact absurd hsub not_cone_enc_subset_cone_encC
    · rcases hW' with ⟨?, rfl⟩ | ⟨?, rfl⟩
      · refine Or.inl ⟨?, ?_, rfl⟩
        have h?σ : ? <+: σ := cone_encC_subset_cone_enc_iff.mp hsub
        exact x.up_mem hσ (memC_cone ?) (singleton_subset_cone.mpr h?σ)
      · refine Or.inr ⟨?, ?_, rfl⟩
        have hστ : σ = ? := cone_encC_subset_iff.mp hsub
        exact hστ ▶ hσ

@[simp] theorem toD'_mem_enc {x : C.Element} (? : Str) :
    (toD' x).mem (cone (enc ?)) ↔ x.mem (cone ?) := by
  constructor
  · rintro (⟨σ, hσ, heq⟩ | ⟨σ, hσ, heq⟩)
    · have h?σ : ? = σ := enc_injective (cone_injective heq)
      rw [h?σ]; exact hσ
    · exact absurd (cone_injective heq) (enc_ne_encC ? σ)
  · intro hx; exact Or.inl ⟨?, hx, rfl⟩

@[simp] theorem toD'_mem_encC {x : C.Element} (? : Str) :
    (toD' x).mem (cone (encC ?)) ↔ x.mem ({?} : Set Str) := by
  constructor
  · rintro (⟨σ, hσ, heq⟩ | ⟨σ, hσ, heq⟩)
    · exact absurd (cone_injective heq).symm (enc_ne_encC σ ?)
    · have h?σ : ? = σ := encC_injective (cone_injective heq)
      rw [h?σ]; exact hσ
  · intro hx; exact Or.inr ⟨?, hx, rfl⟩

@[simp] theorem fromD'_mem_cone {y : D'.Element} (? : Str) :
    (fromD' y).mem (cone ?) ↔ y.mem (cone (enc ?)) := by
  constructor
  · rintro (⟨σ, hσ, heq⟩ | ⟨σ, hσ, heq⟩)
    · have h?σ : ? = σ := cone_injective heq
      rw [h?σ]; exact hσ
    · exact absurd heq (cone_ne_singleton ? σ)
  · intro hy; exact Or.inl ⟨?, hy, rfl⟩

@[simp] theorem fromD'_mem_singleton {y : D'.Element} (? : Str) :
    (fromD' y).mem ({?} : Set Str) ↔ y.mem (cone (encC ?)) := by
  constructor
  · rintro (⟨σ, hσ, heq⟩ | ⟨σ, hσ, heq⟩)
    · exact absurd heq.symm (cone_ne_singleton σ ?)
    · have h?σ : ? = σ := by
        have h1 : ? ∈ ({σ} : Set Str) := heq ▶ rfl
        simpa using h1
      rw [h?σ]; exact hσ
  · intro hy; exact Or.inr ⟨?, hy, rfl⟩

theorem fromD'_toD' (x : C.Element) : fromD' (toD' x) = x := by
  apply NeighborhoodSystem.Element.ext
  intro X
  constructor
  · rintro (⟨σ, hσ, rfl⟩ | ⟨σ, hσ, rfl⟩)
```

```
    · exact (toD'_mem_enc σ).mp hσ
    · exact (toD'_mem_encC σ).mp hσ
  · intro hX
    rcases x.sub hX with ⟨σ, rfl⟩ | ⟨σ, rfl⟩
    · exact Or.inl ⟨σ, (toD'_mem_enc σ).mpr hX, rfl⟩
    · exact Or.inr ⟨σ, (toD'_mem_encC σ).mpr hX, rfl⟩

theorem toD'_fromD' (y : D'.Element) : toD' (fromD' y) = y := by
  apply NeighborhoodSystem.Element.ext
  intro W
  constructor
  · rintro (⟨?, h?, rfl⟩ | ⟨?, h?, rfl⟩)
    · exact (fromD'_mem_cone ?).mp h?
    · exact (fromD'_mem_singleton ?).mp h?
  · intro hW
    rcases y.sub hW with ⟨?, rfl⟩ | ⟨?, rfl⟩
    · exact Or.inl ⟨?, (fromD'_mem_cone ?).mpr hW, rfl⟩
    · exact Or.inr ⟨?, (fromD'_mem_singleton ?).mpr hW, rfl⟩

def cdEquiv : C.Element ≃o D'.Element where
  toFun := toD'
  invFun := fromD'
  left_inv := fromD'_toD'
  right_inv := toD'_fromD'
  map_rel_iff' := by
    intro x x'
    constructor
    · intro h X hX
      rcases x.sub hX with ⟨σ, rfl⟩ | ⟨σ, rfl⟩
      · exact (toD'_mem_enc σ).mp (h _ ((toD'_mem_enc σ).mpr hX))
      · exact (toD'_mem_encC σ).mp (h _ ((toD'_mem_encC σ).mpr hX))
    · intro h W hW
      rcases hW with ⟨σ, hσ, rfl⟩ | ⟨σ, hσ, rfl⟩
      · exact Or.inl ⟨σ, h _ hσ, rfl⟩
      · exact Or.inr ⟨σ, h _ hσ, rfl⟩

theorem B_subsystem_C : B ? C where
  master_eq := rfl
  sub := by rintro X ⟨σ, rfl⟩; exact memC_cone σ
  inter_closed := by
    rintro X Y ⟨σ, rfl⟩ ⟨τ, rfl⟩ hCXY
    rcases cone_trichotomy σ τ with h | h | h
    · rw [Set.inter_eq_left.mpr h]; exact ⟨σ, rfl⟩
    · rw [Set.inter_eq_right.mpr h]; exact ⟨τ, rfl⟩
    · rw [h] at hCXY; exact absurd (C_nonempty ∅ hCXY) (by simp)

theorem B_trianglelefteq_C : B ? C :=
  Subsystem.trianglelefteq B_subsystem_C

theorem C_isomorphic_D' : C ≅? D' := ⟨cdEquiv⟩

theorem C_trianglelefteq_B : C ? B := ⟨D', D'_subsystem_B, C_isomorphic_D'⟩

end Exercise822

end DomainTheory.NeighbourhoodSystems
```

Exercise_8_22.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    ExampleC_le_B

@[expose] public section

open DomainTheory.NeighbourhoodSystems

theorem exercise_8_22 : Example44.C ? ExampleB.B :=
  Exercise822.C_trianglelefteq_B

end
```

The tip then assembles those tools into Scott's statement.
— `exercise_8_22`

3.9.25 Exercise 8.23 — initial algebra inside U

Exercise_8_23.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.FixOp

@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap Exercise823

theorem exercise_8_23 {α : Type} {E : NeighborhoodSystem α}
    (t : ApproximableMap (funSpace E E) (funSpace E E))
    (ht : ∀ a, FinitaryProjection a → FinitaryProjection (tOp t a)) :
    FinitaryProjection (fixOp t) :=
  isFinitaryProjection_fixOp t ht

end
```

EXERCISE 8.23. Suppose a construct T on domains can be made into a computable operator $t : (U \to U) \to (U \to U)$ so that whenever $a : U \to U$ is a finitary projection, then so is $t(a)$ and

$$D_{t(a)} \cong T(D_a) .$$

Does it follow that $\|t\| = \mathrm{fix}(t)$ is such that

$$D_{\|t\|} \cong T(D_{\|t\|})$$

really is the initial solution of the domain equation with respect to projections? Since t is computable, will this solution be effectively given?

Tip summary The tip asserts that `fixOp t` is a finitary projection whenever `t` preserves them.

Development Defines `fixOp` and proves it is finitary when the transformer preserves finitary projections. The tip then assembles those tools into Scott's statement.
— `exercise_8_23`

3.9.26 Exercise 8.24 — coupled domain equations

`Exercise_8_24.lean`

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    CoupledFixedPoints

@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap Exercise824

theorem exercise_8_24 {α : Type} {E : NeighborhoodSystem α}
    (s t : ApproximableMap (PairSpace (E := E)) (funSpace E E))
    (hst : ∀ a b, FinitaryProjection a → FinitaryProjection b →
      FinitaryProjection (binOp s a b) ∧ FinitaryProjection (binOp t a b)) :
    FinitaryProjection (aStar s t) ∧ FinitaryProjection (bStar s t) :=
  isFinitaryProjection_aStar_bStar s t hst

end
```

EXERCISE 8.24. Suppose S and T are two (binary-argument) constructs on domains that can be made into computable operators on projections of the universal domain. Show that we can therefore find a pair of effectively presented domains such that

$$D \cong S(D, E) \quad \text{and} \quad E \cong T(D, E).$$

Tip summary The tip asserts that the coupled solutions `aStar`, `bStar` are finitary projections.

Development Solves the coupled domain equations with finitary projections `aStar`, `bStar`. The tip then assembles those tools into Scott's statement.
— `exercise_8_24`

3.9.27 Exercise 8.25 — reflexive function space

The problem is to find non-trivial solutions to the domain equation

$$(\spadesuit) \qquad D \cong D \to D.$$

Show that the "obvious" solution by retracts is of no use because

$$1 \to 1 = 1$$

for projections. Change the method as follows. Show first

$$U^\infty \times U^\infty \cong U^\infty.$$

Next solve

$$D \cong D \to U^\infty$$

and remark that $U \lhd D$; so D is universal and non-trivial. Finally prove (♠) for this D. (Hint: First show

$$D \times D \cong D,$$

and then show D satisfies (♠).) Is this D effectively given?

Tip summary The tip asserts existence of a non-trivial domain isomorphic to its function space and containing `U`.

Development Rational-interval coding used by effective presentations.

splitSpec812c.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.V
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_8
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    VComputablePresentation
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

namespace inter
open NeighborhoodSystem

theorem diff_eq_diff_of_subset {? : Type*} {A M Z : Set ?} (h : A ⊆ M) :
    A ∩ (M \ Z) = A \ Z := by
  ext x
  simp only [Set.mem_inter_iff, Set.mem_sdiff]
  constructor
  · rintro ⟨hxA, -, hxZ⟩; exact ⟨hxA, hxZ⟩
  · rintro ⟨hxA, hxZ⟩; exact ⟨hxA, h hxA, hxZ⟩

theorem mem_or_empty {? : Type*} {D : NeighborhoodSystem ?} (hpos : D.IsPositive)
    {A B : Set ?} (hA : A = ∅ ∨ D.mem A) (hB : D.mem B) : A ∩ B = ∅ ∨ D.mem (A ∩ B) :=
     by
  rcases hA with rfl | hA
  · exact Or.inl (Set.empty_inter B)
  · rcases Set.eq_empty_or_nonempty (A ∩ B) with h | h
    · exact Or.inl h
    · exact Or.inr ((hpos hA hB).mpr h)
```

```
end inter

open NeighborhoodSystem

def SplitSpec' {α ? : Type*} (E : NeighborhoodSystem ?)
    (split : Set α → Set ? → Set α → Set ? × Set ?) : Prop :=
  ∀ {A : Set α} {B : Set ?}, (A = ∅ ↔ B = ∅) → (B = ∅ ∨ E.mem B) → ∀ Xn : Set α,
    ((split A B Xn).1 = ∅ ∨ E.mem (split A B Xn).1) ∧
      ((split A B Xn).2 = ∅ ∨ E.mem (split A B Xn).2) ∧
      (A ∩ Xn = ∅ ↔ (split A B Xn).1 = ∅) ∧
      (A \ Xn = ∅ ↔ (split A B Xn).2 = ∅) ∧
      (split A B Xn).1 ∪ (split A B Xn).2 = B ∧
      (split A B Xn).1 ∩ (split A B Xn).2 = ∅

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

def combined? (? : ℕ → Bool × Bool) (n : ℕ) : Bool :=
  if n % 2 = 0 then (? (n / 2)).1 else (? (n / 2)).2

end AtomPair
end

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

omit hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne in
theorem combined?_even (? : ℕ → Bool × Bool) (k : ℕ) : combined? ? (2 * k) = (? k).1
    := by
  unfold combined?
  rw [ite_eq_left (by omega : (2 * k) % 2 = 0), show (2 * k) / 2 = k from by omega]

end AtomPair
end
```

```
section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

omit hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne in
theorem combined?_odd (? : ℕ → Bool × Bool) (k : ℕ) : combined? ? (2 * k + 1) = (? k)
    .2 := by
  unfold combined?
  rw [ite_eq_right (by omega : ¬ (2 * k + 1) % 2 = 0), show (2 * k + 1) / 2 = k from
    by omega]

end AtomPair
end

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

def deinterleave? (?' : ℕ → Bool) (k : ℕ) : Bool × Bool := (?' (2 * k), ?' (2 * k +
    1))

end AtomPair
end

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

omit hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne in
```

```
theorem combined?_deinterleave? (?' : ℕ → Bool) :
    combined? (deinterleave? ?') = ?' := by
  funext m
  unfold combined? deinterleave?
  split
  · rename_i hm
    rw [show 2 * (m / 2) = m from by omega]
  · rename_i hm
    rw [show 2 * (m / 2) + 1 = m from by omega]

end AtomPair
end

theorem exists_split' {α ? : Type*} {E : NeighborhoodSystem ?} (hEnomin : E.NoMinimal)
    {A : Set α} {B : Set ?} (hAB : A = ∅ ↔ B = ∅) (hBE : B = ∅ ∨ E.mem B) (Xn : Set α)
     :
    ∃ I J : Set ?, (I = ∅ ∨ E.mem I) ∧ (J = ∅ ∨ E.mem J) ∧
      (A ∩ Xn = ∅ ↔ I = ∅) ∧ (A \ Xn = ∅ ↔ J = ∅) ∧ I ∪ J = B ∧ I ∩ J = ∅ := by
  by_cases h1 : A ∩ Xn = ∅
  · refine ⟨∅, B, Or.inl rfl, hBE, by simp [h1], ?_, by simp, by simp⟩
    have hAeq : A \ Xn = A := by
      ext x
      simp only [Set.mem_sdiff]
      refine ⟨fun hx => hx.1, fun hx => ⟨hx, fun hxn => ?_⟩⟩
      exact Set.eq_empty_iff_forall_notMem.mp h1 x ⟨hx, hxn⟩
    rw [hAeq, hAB]
  · by_cases h2 : A \ Xn = ∅
    · refine ⟨B, ∅, hBE, Or.inl rfl, ?_, iff_of_true h2 rfl, by simp, by simp⟩
      have hAeq : A ∩ Xn = A := by
        ext x
        simp only [Set.mem_inter_iff]
        refine ⟨fun hx => hx.1, fun hx => ⟨hx, ?_⟩⟩
        by_contra hxn
        exact Set.eq_empty_iff_forall_notMem.mp h2 x ⟨hx, hxn⟩
      rw [hAeq, hAB]
    · have hAne : A = ∅ := by
        intro hA
        apply h1
        rw [hA]
        exact Set.empty_inter Xn
      have hBne : B = ∅ := fun hB => hAne (hAB.mpr hB)
      have hBE' : E.mem B := hBE.resolve_left hBne
      obtain ⟨Y, Z, hY, hZ, hYne', hZne', hYZinter, hYZunion⟩ := hEnomin hBE'
      have hYne : Y = ∅ := hYne'.ne_empty
      have hZne : Z = ∅ := hZne'.ne_empty
      exact ⟨Y, Z, Or.inr hY, Or.inr hZ, iff_of_false h1 hYne, iff_of_false h2 hZne,
        hYZunion, hYZinter⟩

def extendTruePair {n : ℕ} (?' : Fin n → Bool × Bool) : ℕ → Bool × Bool :=
  fun i => (extendTrue (Prod.fst ∘ ?') i, extendTrue (Prod.snd ∘ ?') i)

theorem if_swap_disjoint {? : Type*} {P Q : Set ?} (hPQ : P ∩ Q = ∅) {b b' : Bool} (
    hbb' : b = b') :
    (if b then P else Q) ∩ (if b' then P else Q) = ∅ := by
  rcases Bool.eq_false_or_eq_true b with hb | hb <;> rcases Bool.eq_false_or_eq_true b
```

```
    ' with hb' | hb' <;>
    simp_all [Set.inter_comm]

theorem NeighborhoodSystem.NoMinimal.mem_ne_empty {α : Type*} {D : NeighborhoodSystem
    α}
    (hD : D.NoMinimal) {X : Set α} (hX : D.mem X) : X = ∅ := by
  intro hXe
  subst hXe
  obtain ⟨Y, Z, -, -, hYne, -, -, hunion⟩ := hD hX
  exact hYne.ne_empty (Set.union_empty_iff.mp hunion).1

def restrictFinPair (? : ℕ → Bool × Bool) (n : ℕ) : Fin n → Bool × Bool := fun i =>
    ? i.val

theorem extendTruePair_restrictFinPair_agree (? : ℕ → Bool × Bool) (n i : ℕ) (hi : i
    < n) :
    extendTruePair (restrictFinPair ? n) i = ? i := by
  have h1 : extendTrue (Prod.fst ∘ restrictFinPair ? n) i = (? i).1 :=
    extendTrue_restrictFin_agree (Prod.fst ∘ ?) n i hi
  have h2 : extendTrue (Prod.snd ∘ restrictFinPair ? n) i = (? i).2 :=
    extendTrue_restrictFin_agree (Prod.snd ∘ ?) n i hi
  show (extendTrue (Prod.fst ∘ restrictFinPair ? n) i, extendTrue (Prod.snd ∘
    restrictFinPair ? n) i)
      = ? i
  rw [h1, h2]

open Classical in

noncomputable def splitChoice' {α ? : Type*} (E : NeighborhoodSystem ?) (hEnomin : E.
    NoMinimal)
    (A : Set α) (B : Set ?) (Xn : Set α) : Set ? × Set ? :=
  if h : (A = ∅ ↔ B = ∅) ∧ (B = ∅ ∨ E.mem B) then
    ⟨(exists_split' hEnomin h.1 h.2 Xn).choose, (exists_split' hEnomin h.1 h.2 Xn).
    choose_spec.choose⟩
  else (∅, ∅)

theorem splitChoice'_isSplitSpec {α ? : Type*} (E : NeighborhoodSystem ?) (hEnomin : E
    .NoMinimal) :
    SplitSpec' (α := α) E (splitChoice' E hEnomin) := by
  intro A B hAB hBE Xn
  classical
  unfold splitChoice'
  rw [dite_eq_left ⟨hAB, hBE⟩]
  exact (exists_split' hEnomin hAB hBE Xn).choose_spec.choose_spec

def xyStep {α ? : Type*} (split : Set α → Set ? → Set α → Set ? × Set ?)
    (A : Set α) (B : Set ?) (Xn : Set α) (b : Bool) : Set α × Set ? :=
  (if b then A ∩ Xn else A \ Xn, if b then (split A B Xn).1 else (split A B Xn).2)

theorem xyStep_disjoint_of_ne {α ? : Type*} {E : NeighborhoodSystem ?}
    {split : Set α → Set ? → Set α → Set ? × Set ?} (hsplit : SplitSpec' E split)
    {A : Set α} {B : Set ?} (hAB : A = ∅ ↔ B = ∅) (hBE : B = ∅ ∨ E.mem B) (Xn : Set α)
    {b b' : Bool} (hbb' : b = b') :
    (xyStep split A B Xn b).1 ∩ (xyStep split A B Xn b').1 = ∅ ∧
      (xyStep split A B Xn b).2 ∩ (xyStep split A B Xn b').2 = ∅ :=
  ⟨if_swap_disjoint (by
```

```
      ext x; simp only [Set.mem_inter_iff, Set.mem_sdiff, Set.mem_empty_iff_false,
    iff_false]; tauto)
      hbb',
    if_swap_disjoint (hsplit hAB hBE Xn).2.2.2.2.2 hbb'⟩

namespace diff
open NeighborhoodSystem

theorem mem_or_empty {? : Type*} {D : NeighborhoodSystem ?} (hdiff : D.DiffClosed)
    {A B : Set ?} (hA : A = ∅ ∨ D.mem A) (hB : D.mem B) : A \ B = ∅ ∨ D.mem (A \ B) :=
     by
  rcases hA with rfl | hA
  · exact Or.inl (Set.empty_sdiff B)
  · exact hdiff hA hB

end diff
namespace union
open NeighborhoodSystem

theorem mem_or_empty {? : Type*} {D : NeighborhoodSystem ?} (hpos : D.IsPositive)
    (hdiff : D.DiffClosed) {X Y : Set ?} (hX : X = ∅ ∨ D.mem X) (hY : Y = ∅ ∨ D.mem Y)
     :
    X ∪ Y = ∅ ∨ D.mem (X ∪ Y) := by
  rcases hX with rfl | hX
  · simpa using hY
  · rcases hY with rfl | hY
    · simpa using Or.inr hX
    · set M := D.master with hMdef
      have hXM : X ⊆ M := D.sub_master hX
      have hYM : Y ⊆ M := D.sub_master hY
      rcases hdiff D.master_mem hX with hMX0 | hMXm
      · refine Or.inr ?_
        have hXeqM : X = M := Set.Subset.antisymm hXM (Set.sdiff_eq_empty.mp hMX0)
        rw [Set.Subset.antisymm (Set.union_subset hXM hYM) (hXeqM ▶ Set.
    subset_union_left)]
        exact D.master_mem
      · rcases hdiff D.master_mem hY with hMY0 | hMYm
        · refine Or.inr ?_
          have hYeqM : Y = M := Set.Subset.antisymm hYM (Set.sdiff_eq_empty.mp hMY0)
          rw [Set.Subset.antisymm (Set.union_subset hXM hYM) (hYeqM ▶ Set.
    subset_union_right)]
          exact D.master_mem
        · have eq_master : X ∪ Y = M \ ((M \ X) ∩ (M \ Y)) := by
            ext x
            have hXx : x ∈ X → x ∈ M := @hXM x
            have hYx : x ∈ Y → x ∈ M := @hYM x
            simp only [Set.mem_union, Set.mem_sdiff, Set.mem_inter_iff]
            tauto
          rw [eq_master]
          rcases Set.eq_empty_or_nonempty ((M \ X) ∩ (M \ Y)) with hcap0 | hcapne
          · rw [hcap0, Set.sdiff_empty]; exact Or.inr D.master_mem
          · exact hdiff D.master_mem ((hpos hMXm hMYm).mpr hcapne)

end union
open NeighborhoodSystem
```

```
theorem iUnion_mem_or_empty {? : Type*} {D : NeighborhoodSystem ?} (hpos : D.
    IsPositive)
    (hdiff : D.DiffClosed) {ι : Type*} [Fintype ι] {f : ι → Set ?}
    (hf : ∀ i, f i = ∅ ∨ D.mem (f i)) : (⋃ i, f i) = ∅ ∨ D.mem (⋃ i, f i) := by
  classical
  have hstep : ∀ s : Finset ι, (⋃ i ∈ s, f i) = ∅ ∨ D.mem (⋃ i ∈ s, f i) := by
    intro s
    induction s using Finset.induction_on with
    | empty => exact Or.inl (by simp)
    | insert i s hi ih =>
      rw [Finset.set_biUnion_insert]
      exact union.mem_or_empty hpos hdiff (hf i) ih
  have hall : (⋃ i, f i) = ⋃ i ∈ (Finset.univ : Finset ι), f i := by simp
  rw [hall]
  exact hstep Finset.univ

noncomputable def xStep {α β : Type*} (D₁ : NeighborhoodSystem β) (hD₁nomin : D₁.
    NoMinimal)
    (A : Set α) (B : Set β) (Xn : Set α) (b : Bool) : Set α × Set β :=
  xyStep (splitChoice' D₁ hD₁nomin) A B Xn b

namespace xStep
open NeighborhoodSystem

theorem fst_subset {α β : Type*} (D₁ : NeighborhoodSystem β) (hD₁nomin : D₁.NoMinimal)
    (A : Set α) (B : Set β) (Xn : Set α) (b : Bool) : (xStep D₁ hD₁nomin A B Xn b).1 ⊆
     A := by
  by_cases hb : b = true
  · simp only [xStep, xyStep, hb, ite_true]; exact Set.inter_subset_left
  · simp only [xStep, xyStep, hb]; exact Set.sdiff_subset

theorem snd_subset {α β : Type*} {D₁ : NeighborhoodSystem β} (hD₁nomin : D₁.NoMinimal)
    {A : Set α} {B : Set β} (hAB : A = ∅ ↔ B = ∅) (hBmem : B = ∅ ∨ D₁.mem B) (Xn : Set
     α)
    (b : Bool) : (xStep D₁ hD₁nomin A B Xn b).2 ⊆ B := by
  have hspec := splitChoice'_isSplitSpec D₁ hD₁nomin hAB hBmem Xn
  by_cases hb : b = true
  · simp only [xStep, xyStep, hb, ite_true]; exact Set.subset_union_left.trans_eq hspec
    .2.2.2.2.1
  · simp only [xStep, xyStep, hb]; exact Set.subset_union_right.trans_eq hspec
    .2.2.2.2.1

theorem disjoint_of_ne {α β : Type*} {D₁ : NeighborhoodSystem β} (hD₁nomin : D₁.
    NoMinimal)
    {A : Set α} {B : Set β} (hAB : A = ∅ ↔ B = ∅) (hBmem : B = ∅ ∨ D₁.mem B) (Xn : Set
     α)
    {b b' : Bool} (hbb' : b = b') :
    (xStep D₁ hD₁nomin A B Xn b).1 ∩ (xStep D₁ hD₁nomin A B Xn b').1 = ∅ ∧
      (xStep D₁ hD₁nomin A B Xn b).2 ∩ (xStep D₁ hD₁nomin A B Xn b').2 = ∅ :=
  xyStep_disjoint_of_ne (splitChoice'_isSplitSpec D₁ hD₁nomin) hAB hBmem Xn hbb'

end xStep
open NeighborhoodSystem

noncomputable def yStep {α β : Type*} (D₀ : NeighborhoodSystem α) (hD₀nomin : D₀.
    NoMinimal)
```

```
    (A1 : Set α) (B1 : Set β) (Yn : Set β) (b : Bool) : Set α × Set β :=
  (xyStep (splitChoice' D₀ hD₀nomin) B1 A1 Yn b).swap

namespace yStep
open NeighborhoodSystem

theorem disjoint_of_ne {α β : Type*} {D₀ : NeighborhoodSystem α} (hD₀nomin : D₀.
    NoMinimal)
    {A1 : Set α} {B1 : Set β} (hBA : B1 = ∅ ↔ A1 = ∅) (hAmem : A1 = ∅ ∨ D₀.mem A1) (Yn
     : Set β)
    {b b' : Bool} (hbb' : b = b') :
    (yStep D₀ hD₀nomin A1 B1 Yn b).1 ∩ (yStep D₀ hD₀nomin A1 B1 Yn b').1 = ∅ ∧
      (yStep D₀ hD₀nomin A1 B1 Yn b).2 ∩ (yStep D₀ hD₀nomin A1 B1 Yn b').2 = ∅ := by
  have h := xyStep_disjoint_of_ne (splitChoice'_isSplitSpec D₀ hD₀nomin) hBA hAmem Yn
    hbb'
  exact ⟨h.2, h.1⟩

theorem fst_subset {α β : Type*} {D₀ : NeighborhoodSystem α} (hD₀nomin : D₀.NoMinimal)
    {A1 : Set α} {B1 : Set β} (hBA : B1 = ∅ ↔ A1 = ∅) (hAmem : A1 = ∅ ∨ D₀.mem A1) (Yn
     : Set β)
    (b : Bool) : (yStep D₀ hD₀nomin A1 B1 Yn b).1 ⊆ A1 := by
  have hspec := splitChoice'_isSplitSpec D₀ hD₀nomin hBA hAmem Yn
  by_cases hb : b = true
  · simp only [yStep, xyStep, Prod.swap, hb, ite_true]
    exact Set.subset_union_left.trans_eq hspec.2.2.2.2.1
  · simp only [yStep, xyStep, Prod.swap, hb]
    exact Set.subset_union_right.trans_eq hspec.2.2.2.2.1

theorem snd_subset {α β : Type*} (D₀ : NeighborhoodSystem α) (hD₀nomin : D₀.NoMinimal)
    (A1 : Set α) (B1 : Set β) (Yn : Set β) (b : Bool) : (yStep D₀ hD₀nomin A1 B1 Yn b)
    .2 ⊆ B1 := by
  by_cases hb : b = true
  · simp only [yStep, xyStep, Prod.swap, hb, ite_true]; exact Set.inter_subset_left
  · simp only [yStep, xyStep, Prod.swap, hb]; exact Set.sdiff_subset

end yStep
open NeighborhoodSystem

end DomainTheory.NeighbourhoodSystems
```

sumComb.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_9

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap Exercise326

noncomputable def sumComb (a b : ApproximableMap U U) : ApproximableMap U U :=
  (cond U).comp
```

```
    ((paired (whichMap U U U_mem_nonempty U_mem_nonempty)
        (paired (iPlus.comp ((inMap₀ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    comp
                  (a.comp (outMap₀ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)))))
                (iPlus.comp ((inMap₁ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    comp
                  (b.comp (outMap₁ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)))))))).
    comp
      jPlus)

theorem toElementMap_bot_eq_bot_of_comp_eq_idMap {α β : Type*} {D : NeighborhoodSystem
     α}
    {E : NeighborhoodSystem β} {i : ApproximableMap D E} {j : ApproximableMap E D}
    (hji : j.comp i = idMap D) : j.toElementMap E.bot = D.bot := by
  apply le_antisymm
  · have h2 := j.toElementMap_mono (E.bot_le (i.toElementMap D.bot))
    rwa [toElementMap_of_comp_eq_idMap hji] at h2
  · exact D.bot_le _

theorem jPlus_bot_eq_bot :
    jPlus.toElementMap U.bot = (sum U U U_mem_nonempty U_mem_nonempty).bot :=
  toElementMap_bot_eq_bot_of_comp_eq_idMap jPlus_comp_iPlus

theorem fixedNbhd_mem_nonempty (a : ApproximableMap U U) :
    ∀ X, (fixedNbhd a).mem X → X.Nonempty :=
  fun X hX => U_mem_nonempty X ((fixedNbhd_subsystem a).sub hX)

namespace sumComb

theorem eq (a b : ApproximableMap U U) :
    sumComb a b = (cond U).comp
      ((paired (whichMap U U U_mem_nonempty U_mem_nonempty)
          (paired (iPlus.comp ((inMap₀ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    comp
                    (a.comp (outMap₀ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)))))
                  (iPlus.comp ((inMap₁ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    comp
                    (b.comp (outMap₁ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty))))))
    ).comp
        jPlus) := rfl

theorem toElementMap_mem (a b : ApproximableMap U U) (x : U.Element) {Z : Set ?} :
    ((sumComb a b).toElementMap x).mem Z ↔
      (((whichMap U U U_mem_nonempty U_mem_nonempty).toElementMap (jPlus.toElementMap
    x)).mem
        Example12.zero ∧
       (iPlus.toElementMap ((inMap₀ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    toElementMap
        (a.toElementMap ((outMap₀ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    toElementMap
          (jPlus.toElementMap x))))).mem Z) ∨
      (((whichMap U U U_mem_nonempty U_mem_nonempty).toElementMap (jPlus.toElementMap
    x)).mem
        Example12.one ∧
       (iPlus.toElementMap ((inMap₁ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    toElementMap
```

```
          (b.toElementMap ((outMap₁ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    toElementMap
            (jPlus.toElementMap x))))).mem Z) ∨
      Z = U.master := by
  rw [eq]
  simp only [toElementMap_comp, toElementMap_paired]
  rw [cond_toElementMap_mem]

theorem toElementMap_of_left {a b : ApproximableMap U U} {x : U.Element}
    (hL : ∃ X, U.mem X ∧ (jPlus.toElementMap x).mem (inj₀ X)) :
    (sumComb a b).toElementMap x =
      iPlus.toElementMap ((inMap₀ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    toElementMap
        (a.toElementMap ((outMap₀ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    toElementMap
          (jPlus.toElementMap x)))) := by
  have hz : ((whichMap U U U_mem_nonempty U_mem_nonempty).toElementMap
      (jPlus.toElementMap x)).mem Example12.zero := which_mem_zero.mpr hL
  have hno : ¬ ((whichMap U U U_mem_nonempty U_mem_nonempty).toElementMap
      (jPlus.toElementMap x)).mem Example12.one :=
    fun h => not_sum_reaches_both hL (which_mem_one.mp h)
  apply Element.ext
  intro Z
  rw [toElementMap_mem]
  constructor
  · rintro (⟨_, h⟩ | ⟨h1, _⟩ | rfl)
    · exact h
    · exact absurd h1 hno
    · exact Element.master_mem _
  · intro h
    exact Or.inl ⟨hz, h⟩

theorem toElementMap_of_neither {a b : ApproximableMap U U} {x : U.Element}
    (hN : ∀ W, (jPlus.toElementMap x).mem W → W = (sum U U U_mem_nonempty
    U_mem_nonempty).master) :
    (sumComb a b).toElementMap x = U.bot := by
  have hnz : ¬ ((whichMap U U U_mem_nonempty U_mem_nonempty).toElementMap
      (jPlus.toElementMap x)).mem Example12.zero := by
    rw [which_mem_zero]
    rintro ⟨X, _, hX⟩
    exact inj₀_ne_sumMaster (hN _ hX)
  have hno : ¬ ((whichMap U U U_mem_nonempty U_mem_nonempty).toElementMap
      (jPlus.toElementMap x)).mem Example12.one := by
    rw [which_mem_one]
    rintro ⟨Y, _, hY⟩
    exact inj₁_ne_sumMaster (hN _ hY)
  apply Element.ext
  intro Z
  rw [toElementMap_mem, mem_bot]
  constructor
  · rintro (⟨h, _⟩ | ⟨h, _⟩ | h)
    · exact absurd h hnz
    · exact absurd h hno
    · exact h
  · intro h
    exact Or.inr (Or.inr h)
```

```
theorem toElementMap_of_right {a b : ApproximableMap U U} {x : U.Element}
    (hR : ∃ Y, U.mem Y ∧ (jPlus.toElementMap x).mem (inj₁ Y)) :
    (sumComb a b).toElementMap x =
      iPlus.toElementMap ((inMap₁ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    toElementMap
        (b.toElementMap ((outMap₁ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    toElementMap
          (jPlus.toElementMap x)))) := by
  have ho : ((whichMap U U U_mem_nonempty U_mem_nonempty).toElementMap
      (jPlus.toElementMap x)).mem Example12.one := which_mem_one.mpr hR
  have hnz : ¬ ((whichMap U U U_mem_nonempty U_mem_nonempty).toElementMap
      (jPlus.toElementMap x)).mem Example12.zero :=
    fun h => not_sum_reaches_both (which_mem_zero.mp h) hR
  apply Element.ext
  intro Z
  rw [toElementMap_mem]
  constructor
  · rintro (⟨h1, _⟩ | ⟨_, h⟩ | rfl)
    · exact absurd h1 hnz
    · exact h
    · exact Element.master_mem _
  · intro h
    exact Or.inr (Or.inl ⟨ho, h⟩)

theorem isRetraction {a b : ApproximableMap U U} (ha : Retraction a)
    (hb : Retraction b) : Retraction (sumComb a b) := by
  constructor
  apply ext_of_toElementMap
  intro x
  rw [toElementMap_comp]
  rcases sum_element_trichotomy (jPlus.toElementMap x) with hL | hR | hN
  · rw [toElementMap_of_left hL]
    set v := a.toElementMap (outMap₀.toElementMap (jPlus.toElementMap x)) with hv
    have hjy : jPlus.toElementMap (iPlus.toElementMap (inMap₀.toElementMap v))
        = inMap₀.toElementMap v := toElementMap_of_comp_eq_idMap jPlus_comp_iPlus _
    have hLy : ∃ X, U.mem X ∧
        (jPlus.toElementMap (iPlus.toElementMap (inMap₀.toElementMap v))).mem (inj₀ X)
    := by
      rw [hjy]; exact inMap₀_toElementMap_reaches_left v
    rw [toElementMap_of_left hLy, hjy,
      toElementMap_of_comp_eq_idMap outMap₀_comp_inMap₀ v,
    toElementMap_idem_of_isRetraction ha]
  · rw [toElementMap_of_right hR]
    set v := b.toElementMap (outMap₁.toElementMap (jPlus.toElementMap x)) with hv
    have hjy : jPlus.toElementMap (iPlus.toElementMap (inMap₁.toElementMap v))
        = inMap₁.toElementMap v := toElementMap_of_comp_eq_idMap jPlus_comp_iPlus _
    have hRy : ∃ Y, U.mem Y ∧
        (jPlus.toElementMap (iPlus.toElementMap (inMap₁.toElementMap v))).mem (inj₁ Y)
    := by
      rw [hjy]; exact inMap₁_toElementMap_reaches_right v
    rw [toElementMap_of_right hRy, hjy,
      toElementMap_of_comp_eq_idMap outMap₁_comp_inMap₁ v,
    toElementMap_idem_of_isRetraction hb]
  · rw [toElementMap_of_neither hN]
    apply toElementMap_of_neither
```

```
    intro W hW
    rw [jPlus_bot_eq_bot, mem_bot] at hW
    exact hW

theorem le_idMap {a b : ApproximableMap U U} (ha : a ≤ idMap U) (hb : b ≤ idMap U) :
    sumComb a b ≤ idMap U := by
  rw [le_iff_toElementMap_le]
  intro x
  rw [toElementMap_idMap]
  rcases sum_element_trichotomy (jPlus.toElementMap x) with hL | hR | hN
  · calc (sumComb a b).toElementMap x
        = iPlus.toElementMap ((inMap₀ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    toElementMap
            (a.toElementMap ((outMap₀ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    toElementMap
              (jPlus.toElementMap x)))) := toElementMap_of_left hL
      _ ≤ iPlus.toElementMap ((inMap₀ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    toElementMap
            ((outMap₀ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).toElementMap
              (jPlus.toElementMap x))) :=
          iPlus.toElementMap_mono (inMap₀.toElementMap_mono (
    toElementMap_le_self_of_le_idMap ha _))
      _ = iPlus.toElementMap (jPlus.toElementMap x) := by rw [inMap₀_outMap₀_eq_of_left
     hL]
      _ ≤ x := toElementMap_le_of_comp_le_idMap iPlus_comp_jPlus_le x
  · calc (sumComb a b).toElementMap x
        = iPlus.toElementMap ((inMap₁ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    toElementMap
            (b.toElementMap ((outMap₁ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    toElementMap
              (jPlus.toElementMap x)))) := toElementMap_of_right hR
      _ ≤ iPlus.toElementMap ((inMap₁ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).
    toElementMap
            ((outMap₁ (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)).toElementMap
              (jPlus.toElementMap x))) :=
          iPlus.toElementMap_mono (inMap₁.toElementMap_mono (
    toElementMap_le_self_of_le_idMap hb _))
      _ = iPlus.toElementMap (jPlus.toElementMap x) := by rw [inMap₁_outMap₁
    _eq_of_right hR]
      _ ≤ x := toElementMap_le_of_comp_le_idMap iPlus_comp_jPlus_le x
  · rw [toElementMap_of_neither hN]
    exact U.bot_le x

theorem isProjection {a b : ApproximableMap U U}
    (ha : IsProjection a) (hb : IsProjection b) : IsProjection (sumComb a b) :=
  ⟨isRetraction ha.1 hb.1, le_idMap ha.2 hb.2⟩

noncomputable def I (a b : ApproximableMap U U) :
    ApproximableMap (sum (fixedNbhd a) (fixedNbhd b)
      (fixedNbhd_mem_nonempty a) (fixedNbhd_mem_nonempty b)) U :=
  iPlus.comp (sumMap (h₀' := U_mem_nonempty) (h₁' := U_mem_nonempty)
    (fixedNbhd_subsystem a).inj (fixedNbhd_subsystem b).inj)

noncomputable def J (a b : ApproximableMap U U) :
    ApproximableMap U (sum (fixedNbhd a) (fixedNbhd b)
      (fixedNbhd_mem_nonempty a) (fixedNbhd_mem_nonempty b)) :=
```

```
  (sumMap (h₀ := U_mem_nonempty) (h₁ := U_mem_nonempty)
    (fixedNbhd_subsystem a).proj (fixedNbhd_subsystem b).proj).comp jPlus

end sumComb

end DomainTheory.NeighbourhoodSystems
```

FixedNbhdFinitaryOrder.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_2

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Examples_8_4

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_8

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open Domain.Recursive NeighborhoodSystem
open NeighborhoodSystem ApproximableMap
section
universe u
variable {α : Type u} {E : NeighborhoodSystem α}

theorem isFinitaryProjection_le_iff_fixedNbhd_subsystem {a b : ApproximableMap E E}
    (ha : FinitaryProjection a) (hb : FinitaryProjection b) :
    a ≤ b ↔ fixedNbhd a ? fixedNbhd b := by
  have hsa : sub a = a := sub_eq_self_iff_isFinitaryProjection.mpr ha
  have hsb : sub b = b := sub_eq_self_iff_isFinitaryProjection.mpr hb
  set fa : {f : ApproximableMap E E // sub f = f} := ⟨a, hsa⟩ with hfa_def
  set fb : {f : ApproximableMap E E // sub f = f} := ⟨b, hsb⟩ with hfb_def
  constructor
  · intro hab
    have hfab : fa ≤ fb := hab
    exact (finitaryProjectionSubsystemEquiv E).monotone hfab
  · intro hD
    have hle : (finitaryProjectionSubsystemEquiv E) fa ≤ (
    finitaryProjectionSubsystemEquiv E) fb :=
      hD
    have hback := (finitaryProjectionSubsystemEquiv E).symm.monotone hle
    rwa [OrderIso.symm_apply_apply, OrderIso.symm_apply_apply] at hback

theorem exercise_8_16_assembly :
    (∀ {a b : ApproximableMap E E}, FinitaryProjection a → FinitaryProjection b →
        (a ≤ b ↔ fixedNbhd a ? fixedNbhd b)) ∧
      (∀ {P : ComputablePresentation E} {a : ApproximableMap E E},
        ComputableMap P P a → (fixedNbhd a).IsEffectivelyGiven) :=
  ⟨fun ha hb => isFinitaryProjection_le_iff_fixedNbhd_subsystem ha hb,
    fun hcomp => fixedNbhd_isEffectivelyGiven hcomp⟩
end
```

```
end DomainTheory.NeighbourhoodSystems
```

RecursiveCross.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_1

@[expose] public section

namespace Domain.Recursive

def consStep2 (w : ℕ) : ℕ := Nat.pair w.unpair.1 w.unpair.2.unpair.1 + 1

def appendCode (c1 c2 : ℕ) : ℕ := foldCode consStep2 0 c2 c1

def crossInnerStep (bop : ℕ → ℕ) (w : ℕ) : ℕ :=
  Nat.pair (bop (Nat.pair w.unpair.2.unpair.2 w.unpair.1)) w.unpair.2.unpair.1 + 1

def crossInner (bop : ℕ → ℕ) (x c2 : ℕ) : ℕ := foldCode (crossInnerStep bop) x 0 c2

def crossOuterStep (bop : ℕ → ℕ) (w : ℕ) : ℕ :=
  appendCode (crossInner bop w.unpair.1 w.unpair.2.unpair.2) w.unpair.2.unpair.1

def crossCombine (bop : ℕ → ℕ) (c1 c2 : ℕ) : ℕ := foldCode (crossOuterStep bop) c2 0
    c1

def flatMapStep (f : ℕ → ℕ) (w : ℕ) : ℕ :=
  appendCode (f (Nat.pair w.unpair.2.unpair.2 w.unpair.1)) w.unpair.2.unpair.1

def flatMapCode (f : ℕ → ℕ) (x c : ℕ) : ℕ := foldCode (flatMapStep f) x 0 c

theorem consStep2_eq (x acc params : ℕ) :
    consStep2 (Nat.pair x (Nat.pair acc params)) = Nat.pair x acc + 1 := by
  unfold consStep2; simp only [unpair_pair_fst, unpair_pair_snd]

theorem mem_decodeList_appendCode_aux :
    ∀ (l : List ℕ) (acc z : ℕ),
      z ∈ decodeList (List.foldl (fun acc x => consStep2 (Nat.pair x (Nat.pair acc 0))
    ) acc l)
        ↔ z ∈ l ∨ z ∈ decodeList acc
  | [], acc, z => by simp
  | a :: l, acc, z => by
    rw [List.foldl_cons, consStep2_eq, mem_decodeList_appendCode_aux l (Nat.pair a acc
     + 1) z,
      decodeList_succ, unpair_pair_fst, unpair_pair_snd]
    simp only [List.mem_cons]
    constructor
    · rintro (hl | (rfl | hacc))
      · exact Or.inl (Or.inr hl)
      · exact Or.inl (Or.inl rfl)
      · exact Or.inr hacc
    · rintro ((rfl | hl) | hacc)
```

```
      · exact Or.inr (Or.inl rfl)
      · exact Or.inl hl
      · exact Or.inr (Or.inr hacc)

theorem mem_decodeList_appendCode (c1 c2 z : ℕ) :
    z ∈ decodeList (appendCode c1 c2) ↔ z ∈ decodeList c1 ∨ z ∈ decodeList c2 := by
  unfold appendCode
  rw [foldCode_eq', mem_decodeList_appendCode_aux (decodeList c1) c2 z]

theorem crossInnerStep_eq (bop : ℕ → ℕ) (y acc x : ℕ) :
    crossInnerStep bop (Nat.pair y (Nat.pair acc x)) = Nat.pair (bop (Nat.pair x y))
    acc + 1 := by
  unfold crossInnerStep; simp only [unpair_pair_fst, unpair_pair_snd]

private theorem mem_decodeList_crossInner_aux (bop : ℕ → ℕ) (x : ℕ) :
    ∀ (l : List ℕ) (acc z : ℕ),
      z ∈ decodeList
          (List.foldl (fun acc y => crossInnerStep bop (Nat.pair y (Nat.pair acc x)))
    acc l)
        ↔ (∃ y ∈ l, z = bop (Nat.pair x y)) ∨ z ∈ decodeList acc
  | [], acc, z => by simp
  | a :: l, acc, z => by
    rw [List.foldl_cons, crossInnerStep_eq,
      mem_decodeList_crossInner_aux bop x l (Nat.pair (bop (Nat.pair x a)) acc + 1) z,
      decodeList_succ, unpair_pair_fst, unpair_pair_snd]
    simp only [List.mem_cons]
    constructor
    · rintro (⟨y, hy, heq⟩ | (rfl | hacc))
      · exact Or.inl ⟨y, Or.inr hy, heq⟩
      · exact Or.inl ⟨a, Or.inl rfl, rfl⟩
      · exact Or.inr hacc
    · rintro (⟨y, (rfl | hy), heq⟩ | hacc)
      · exact Or.inr (Or.inl heq)
      · exact Or.inl ⟨y, hy, heq⟩
      · exact Or.inr (Or.inr hacc)

theorem mem_decodeList_crossInner {bop : ℕ → ℕ} (x c2 z : ℕ) :
    z ∈ decodeList (crossInner bop x c2) ↔ ∃ y ∈ decodeList c2, z = bop (Nat.pair x y)
     := by
  unfold crossInner
  rw [foldCode_eq', mem_decodeList_crossInner_aux bop x (decodeList c2) 0 z]
  simp only [decodeList_zero, List.not_mem_nil, or_false]

theorem crossOuterStep_eq (bop : ℕ → ℕ) (x acc c2 : ℕ) :
    crossOuterStep bop (Nat.pair x (Nat.pair acc c2)) = appendCode (crossInner bop x
    c2) acc := by
  unfold crossOuterStep; simp only [unpair_pair_fst, unpair_pair_snd]

theorem mem_decodeList_crossCombine_aux (bop : ℕ → ℕ) (c2 : ℕ) :
    ∀ (l : List ℕ) (acc z : ℕ),
      z ∈ decodeList (List.foldl (fun acc x => crossOuterStep bop (Nat.pair x (Nat.
    pair acc c2)))
          acc l)
        ↔ (∃ x ∈ l, ∃ y ∈ decodeList c2, z = bop (Nat.pair x y)) ∨ z ∈ decodeList acc
  | [], acc, z => by simp
  | a :: l, acc, z => by
```

```
    rw [List.foldl_cons, crossOuterStep_eq,
      mem_decodeList_crossCombine_aux bop c2 l (appendCode (crossInner bop a c2) acc)
    z,
      mem_decodeList_appendCode, mem_decodeList_crossInner]
    simp only [List.mem_cons]
    constructor
    · rintro (⟨x, hx, y, hy, heq⟩ | (⟨y, hy, heq⟩ | hacc))
      · exact Or.inl ⟨x, Or.inr hx, y, hy, heq⟩
      · exact Or.inl ⟨a, Or.inl rfl, y, hy, heq⟩
      · exact Or.inr hacc
    · rintro (⟨x, (rfl | hx), y, hy, heq⟩ | hacc)
      · exact Or.inr (Or.inl ⟨y, hy, heq⟩)
      · exact Or.inl ⟨x, hx, y, hy, heq⟩
      · exact Or.inr (Or.inr hacc)

theorem flatMapStep_eq (f : ℕ → ℕ) (y acc x : ℕ) :
    flatMapStep f (Nat.pair y (Nat.pair acc x)) = appendCode (f (Nat.pair x y)) acc :=
     by
  unfold flatMapStep; simp only [unpair_pair_fst, unpair_pair_snd]

theorem mem_decodeList_flatMapCode_aux (f : ℕ → ℕ) (x : ℕ) :
    ∀ (l : List ℕ) (acc z : ℕ),
      z ∈ decodeList (List.foldl (fun acc y => flatMapStep f (Nat.pair y (Nat.pair acc
     x))) acc l)
        ↔ (∃ y ∈ l, z ∈ decodeList (f (Nat.pair x y))) ∨ z ∈ decodeList acc
  | [], acc, z => by simp
  | a :: l, acc, z => by
    rw [List.foldl_cons, flatMapStep_eq,
      mem_decodeList_flatMapCode_aux f x l (appendCode (f (Nat.pair x a)) acc) z,
      mem_decodeList_appendCode]
    simp only [List.mem_cons]
    constructor
    · rintro (⟨y, hy, hz⟩ | (hfa | hacc))
      · exact Or.inl ⟨y, Or.inr hy, hz⟩
      · exact Or.inl ⟨a, Or.inl rfl, hfa⟩
      · exact Or.inr hacc
    · rintro (⟨y, (rfl | hy), hz⟩ | hacc)
      · exact Or.inr (Or.inl hz)
      · exact Or.inl ⟨y, hy, hz⟩
      · exact Or.inr (Or.inr hacc)

theorem mem_decodeList_crossCombine {bop : ℕ → ℕ} (c1 c2 z : ℕ) :
    z ∈ decodeList (crossCombine bop c1 c2) ↔
      ∃ x ∈ decodeList c1, ∃ y ∈ decodeList c2, z = bop (Nat.pair x y) := by
  unfold crossCombine
  rw [foldCode_eq', mem_decodeList_crossCombine_aux bop c2 (decodeList c1) 0 z]
  simp only [decodeList_zero, List.not_mem_nil, or_false]

theorem mem_decodeList_flatMapCode {f : ℕ → ℕ} (x c z : ℕ) :
    z ∈ decodeList (flatMapCode f x c) ↔ ∃ y ∈ decodeList c, z ∈ decodeList (f (Nat.
    pair x y)) := by
  unfold flatMapCode
  rw [foldCode_eq', mem_decodeList_flatMapCode_aux f x (decodeList c) 0 z]
  simp only [decodeList_zero, List.not_mem_nil, or_false]

theorem primrec_consStep2 : Nat.Primrec consStep2 := by
```

```
  have h1 : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have h21 : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  exact (Nat.Primrec.succ.comp (h1.pair h21)).of_eq fun _ => rfl

theorem primrec_appendCode : Nat.Primrec (fun t => appendCode t.unpair.1 t.unpair.2)
    :=
  (primrec_foldCode primrec_consStep2 (Nat.Primrec.const 0) Nat.Primrec.right
    Nat.Primrec.left).of_eq fun _ => rfl

theorem primrec_crossInnerStep {bop : ℕ → ℕ} (hbop : Nat.Primrec bop) :
    Nat.Primrec (crossInnerStep bop) := by
  have hy : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hacc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hx : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  exact (Nat.Primrec.succ.comp ((hbop.comp (hx.pair hy)).pair hacc)).of_eq fun _ =>
    rfl

theorem primrec_crossInner {bop : ℕ → ℕ} (hbop : Nat.Primrec bop) :
    Nat.Primrec (fun t => crossInner bop t.unpair.1 t.unpair.2) :=
  (primrec_foldCode (primrec_crossInnerStep hbop) Nat.Primrec.left (Nat.Primrec.const
    0)
    Nat.Primrec.right).of_eq fun _ => rfl

theorem primrec_crossOuterStep {bop : ℕ → ℕ} (hbop : Nat.Primrec bop) :
    Nat.Primrec (crossOuterStep bop) := by
  have hx : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hacc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hc2 : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hinner : Nat.Primrec (fun w : ℕ => crossInner bop w.unpair.1 w.unpair.2.unpair
    .2) :=
    ((primrec_crossInner hbop).comp (hx.pair hc2)).of_eq fun w => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  exact (primrec_appendCode.comp (hinner.pair hacc)).of_eq fun w => by
    unfold crossOuterStep
    simp only [unpair_pair_fst, unpair_pair_snd]

theorem primrec_crossCombine {bop : ℕ → ℕ} (hbop : Nat.Primrec bop) :
    Nat.Primrec (fun t => crossCombine bop t.unpair.1 t.unpair.2) :=
  (primrec_foldCode (primrec_crossOuterStep hbop) Nat.Primrec.right (Nat.Primrec.const
     0)
    Nat.Primrec.left).of_eq fun _ => rfl

theorem primrec_flatMapStep {f : ℕ → ℕ} (hf : Nat.Primrec f) : Nat.Primrec (
    flatMapStep f) := by
  have hy : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hacc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hx : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  exact (primrec_appendCode.comp ((hf.comp (hx.pair hy)).pair hacc)).of_eq fun w => by
    unfold flatMapStep; simp only [unpair_pair_fst, unpair_pair_snd]
```

```
theorem primrec_flatMapCode {f : ℕ → ℕ} (hf : Nat.Primrec f) :
    Nat.Primrec (fun t => flatMapCode f t.unpair.1 t.unpair.2) :=
  (primrec_foldCode (primrec_flatMapStep hf) Nat.Primrec.left (Nat.Primrec.const 0)
    Nat.Primrec.right).of_eq fun _ => rfl

end Domain.Recursive
```

EmbeddingsIntoU.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Exercise_8_12
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.ProjPair
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Proposition_8_10
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_6
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
section

open NeighborhoodSystem ApproximableMap Subsystem
universe u v w
variable {α : Type u} {β : Type v} {? : Type w}

def IsUniversal {? : Type w} (W : NeighborhoodSystem ?) : Prop :=
  ∀ {α : Type u} (D : NeighborhoodSystem α) [Countable {S : Set α // D.mem S}], D ? W

theorem trianglelefteq_of_isomorphic_left {D : NeighborhoodSystem α} {D' :
    NeighborhoodSystem β}
    {E : NeighborhoodSystem ?} (hDD' : D ≅? D') (hD'E : D' ? E) : D ? E := by
  obtain ⟨F, hFE, ⟨eD'F⟩⟩ := hD'E
  obtain ⟨eDD'⟩ := hDD'
  exact ⟨F, hFE, ⟨eDD'.trans eD'F⟩⟩

theorem trianglelefteq_trans {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}
    {F : NeighborhoodSystem ?} (h1 : D ? E) (h2 : E ? F) : D ? F := by
  obtain ⟨D', hD'E, ⟨eDD'⟩⟩ := h1
  obtain ⟨E', hE'F, ⟨eEE'⟩⟩ := h2
  have pD'F : ProjPair D' F :=
    ((ProjPair.ofSubsystem hD'E).comp (ProjPair.ofIso eEE')).comp (ProjPair.
    ofSubsystem hE'F)
  have hD'F : D' ? F :=
    trianglelefteq_of_projectionPair pD'F.inj pD'F.proj pD'F.proj_comp_inj pD'F.
    inj_comp_proj_le
  exact trianglelefteq_of_isomorphic_left ⟨eDD'⟩ hD'F
```

```
theorem U_isUniversal : IsUniversal.{u} U := by
  intro α D _
  obtain ⟨D', hiso, hsub⟩ := theorem_8_8_a D
  exact ⟨D', hsub, hiso⟩

theorem funSpaceUU_trianglelefteq_U : funSpace U U ? U :=
  trianglelefteq_of_projectionPair iArrow jArrow jArrow_comp_iArrow
    iArrow_comp_jArrow_le

theorem isUniversal_of_isomorphic {W : NeighborhoodSystem β} {W' : NeighborhoodSystem
    ?}
    (hW : IsUniversal.{u} W) (hWW' : W ≅? W') : IsUniversal.{u} W' := by
  have hWW'_tri : W ? W' := hWW'.elim fun e => ⟨W', Subsystem.refl W', ⟨e⟩⟩
  intro α D _
  exact trianglelefteq_trans (hW D) hWW'_tri

theorem V.isUniversal : IsUniversal.{u} V :=
  isUniversal_of_isomorphic U_isUniversal ⟨effectiveIso812_UV.toDomainIso⟩

theorem prodUU_trianglelefteq_U : prod U U ? U :=
  trianglelefteq_of_projectionPair iTimes jTimes jTimes_comp_iTimes
    iTimes_comp_jTimes_le

theorem sumUU_trianglelefteq_U : sum U U U_mem_nonempty U_mem_nonempty ? U :=
  trianglelefteq_of_projectionPair iPlus jPlus jPlus_comp_iPlus iPlus_comp_jPlus_le

end

end DomainTheory.NeighbourhoodSystems
```

EmbeddingsIntoU_more.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    EmbeddingsIntoU
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

section
open NeighborhoodSystem ApproximableMap Exercise326
universe u

section Prod

variable {α : Type u} {E : NeighborhoodSystem α}

noncomputable def funToPair : ApproximableMap (funSpace TD E) (prod E E) :=
  paired
```

```
    ((evalMap TD E).comp
      (paired (idMap (funSpace TD E)) (constMap (funSpace TD E) Example23.trueElt)))
    ((evalMap TD E).comp
      (paired (idMap (funSpace TD E)) (constMap (funSpace TD E) Example23.falseElt)))

end Prod

section Sum

variable {α : Type u} {E : NeighborhoodSystem α} (hE : ∀ X, E.mem X → X.Nonempty)

noncomputable def sumToProdT : ApproximableMap (sum E E hE hE) (prod TD (prod E E)) :=
  paired (whichMap E E hE hE)
    (paired (outMap₀ (h₀ := hE) (h₁ := hE)) (outMap₁ (h₀ := hE) (h₁ := hE)))

end Sum

section Prod

variable {α : Type u} {E : NeighborhoodSystem α}

noncomputable def swapProdT : ApproximableMap (prod (prod E E) TD) (prod TD (prod E E)
    ) :=
  paired (proj₁ (prod E E) TD) (proj₀ (prod E E) TD)

noncomputable def pairToFun : ApproximableMap (prod E E) (funSpace TD E) :=
  curry ((cond E).comp swapProdT)

end Prod

end

section
open NeighborhoodSystem ApproximableMap Exercise326

section General

variable {α β ? ? : Type*}

theorem TD_bot_eq_botElt : TD.bot = Example23.botElt :=
  le_antisymm (NeighborhoodSystem.bot_le _ _) (Example23.botElt_le _)

end General

theorem TD_trichotomy (t : TD.Element) :
    t = Example23.botElt ∨ t = Example23.trueElt ∨ t = Example23.falseElt :=
  Example12.neighborhoodSystem.element_classification t

section General

variable {α β ? ? : Type*}

theorem funSpace_dom_trianglelefteq {A : NeighborhoodSystem α} {B : NeighborhoodSystem
    β}
    (C : NeighborhoodSystem ?) (h : A ? B) : funSpace A C ? funSpace B C := by
  obtain ⟨D', hD'B, ⟨eAD'⟩⟩ := h
```

```
  set p : ProjPair A B := (ProjPair.ofIso eAD').comp (ProjPair.ofSubsystem hD'B) with
    hp
  refine trianglelefteq_of_projectionPair (expMap p.proj (idMap C)) (expMap p.inj (
    idMap C))
    ?_ ?_
  · have hcomp := (expMap.comp p.proj (idMap C) p.inj (idMap C)).symm
    rw [hcomp, p.proj_comp_inj, idMap_comp]
    exact expMap.id
  · calc (expMap p.proj (idMap C)).comp (expMap p.inj (idMap C))
        = expMap (p.inj.comp p.proj) ((idMap C).comp (idMap C)) :=
          (expMap.comp p.inj (idMap C) p.proj (idMap C)).symm
      _ ≤ expMap (idMap B) ((idMap C).comp (idMap C)) :=
          expMap.mono_left p.inj_comp_proj_le _
      _ = expMap (idMap B) (idMap C) := by rw [idMap_comp]
      _ = idMap (funSpace B C) := expMap.id

end General

section SumHelpers

variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
variable {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}

theorem outMap₀_comp_inMap₁ :
    (outMap₀ (V₀ := V₀) (V₁ := V₁) (h₀ := h₀) (h₁ := h₁)).comp
        (inMap₁ (h₀ := h₀) (h₁ := h₁)) = constMap V₁ V₀.bot := by
  apply ApproximableMap.ext
  intro Y Z
  rw [constMap_rel, mem_bot]
  constructor
  · rintro ⟨W, ⟨hY, hWmem, hinj⟩, _, hZ, hsub⟩
    refine ⟨hY, ?_⟩
    obtain ⟨b, hb⟩ := h₁ Y hY
    have hmaster : leftPart V₀ (inj₁ Y) ⊆ leftPart V₀ W := leftPart_mono V₀ hinj
    rw [leftPart_inj₁ V₀ ⟨b, hb⟩] at hmaster
    exact Set.Subset.antisymm (V₀.sub_master hZ) (hmaster.trans hsub)
  · rintro ⟨hY, rfl⟩
    exact ⟨inj₁ Y, ⟨hY, Or.inr (Or.inr ⟨Y, hY, rfl⟩), subset_rfl⟩,
      Or.inr (Or.inr ⟨Y, hY, rfl⟩), V₀.master_mem, (leftPart_inj₁ V₀ (h₁ Y hY)).subset⟩

theorem outMap₁_comp_inMap₀ :
    (outMap₁ (V₀ := V₀) (V₁ := V₁) (h₀ := h₀) (h₁ := h₁)).comp
        (inMap₀ (h₀ := h₀) (h₁ := h₁)) = constMap V₀ V₁.bot := by
  apply ApproximableMap.ext
  intro X Z
  rw [constMap_rel, mem_bot]
  constructor
  · rintro ⟨W, ⟨hX, hWmem, hinj⟩, _, hZ, hsub⟩
    refine ⟨hX, ?_⟩
    obtain ⟨a, ha⟩ := h₀ X hX
    have hmaster : rightPart V₁ (inj₀ X) ⊆ rightPart V₁ W := rightPart_mono V₁ hinj
    rw [rightPart_inj₀ V₁ ⟨a, ha⟩] at hmaster
    exact Set.Subset.antisymm (V₁.sub_master hZ) (hmaster.trans hsub)
  · rintro ⟨hX, rfl⟩
    exact ⟨inj₀ X, ⟨hX, Or.inr (Or.inl ⟨X, hX, rfl⟩), subset_rfl⟩,
      Or.inr (Or.inl ⟨X, hX, rfl⟩), V₁.master_mem, (rightPart_inj₀ V₁ (h₀ X hX)).subset⟩
```

```
end SumHelpers

section General

variable {α β ? ? : Type*}

theorem pair_bot {V0 : NeighborhoodSystem α} {V1 : NeighborhoodSystem β} :
    pair V0.bot V1.bot = (prod V0 V1).bot := by
  apply le_antisymm
  · intro W hW
    obtain ⟨X, Y, hX, hY, rfl⟩ := hW
    rw [mem_bot] at hX hY
    subst hX; subst hY
    rw [mem_bot]
    exact prod_master.symm
  · exact NeighborhoodSystem.bot_le _ _

theorem prod_left_trianglelefteq {A : NeighborhoodSystem α} {B : NeighborhoodSystem β}
    (C : NeighborhoodSystem ?) (h : A ? B) : prod A C ? prod B C := by
  obtain ⟨D', hD'B, ⟨eAD'⟩⟩ := h
  set p : ProjPair A B := (ProjPair.ofIso eAD').comp (ProjPair.ofSubsystem hD'B) with
    hp
  refine trianglelefteq_of_projectionPair (paired (p.inj.comp (proj₀ A C)) (proj₁ A C))
    (paired (p.proj.comp (proj₀ B C)) (proj₁ B C)) ?_ ?_
  · apply ext_of_toElementMap
    intro z
    rw [← pair_fst_snd z]
    set x := z.fst; set y := z.snd
    rw [toElementMap_comp, toElementMap_idMap, toElementMap_paired,
    toElementMap_paired,
      toElementMap_comp, toElementMap_proj₀, toElementMap_proj₁, fst_pair, snd_pair,
      toElementMap_comp, toElementMap_proj₀, fst_pair, toElementMap_proj₁, snd_pair]
    have hxx : (p.proj.comp p.inj).toElementMap x = (idMap A).toElementMap x := by
      rw [p.proj_comp_inj]
    rw [toElementMap_comp, toElementMap_idMap] at hxx
    rw [hxx]
  · rw [le_iff_toElementMap_le]
    intro z
    rw [← pair_fst_snd z]
    set x := z.fst; set y := z.snd
    rw [toElementMap_comp, toElementMap_idMap, toElementMap_paired,
    toElementMap_paired,
      toElementMap_comp, toElementMap_proj₀, toElementMap_proj₁, fst_pair, snd_pair,
      toElementMap_comp, toElementMap_proj₀, fst_pair, toElementMap_proj₁, snd_pair]
    apply pair_le_pair_iff.mpr
    refine ⟨?_, le_refl y⟩
    have hxx : (p.inj.comp p.proj).toElementMap x ≤ (idMap B).toElementMap x :=
      le_iff_toElementMap_le.mp p.inj_comp_proj_le x
    rwa [toElementMap_comp, toElementMap_idMap] at hxx

theorem prod_right_trianglelefteq {A : NeighborhoodSystem α} {B : NeighborhoodSystem β
    }
    (C : NeighborhoodSystem ?) (h : A ? B) : prod C A ? prod C B := by
  have h1 : prod C A ? prod A C :=
    (prod_comm_isomorphic (V₀ := C) (V₁ := A)).elim fun e => ⟨_, Subsystem.refl _, ⟨e⟩⟩
```

```
  have h2 : prod A C ? prod B C := prod_left_trianglelefteq C h
  have h3 : prod B C ? prod C B :=
    (prod_comm_isomorphic (V₀ := B) (V₁ := C)).elim fun e => ⟨_, Subsystem.refl _, ⟨e⟩⟩
  exact trianglelefteq_trans (trianglelefteq_trans h1 h2) h3

theorem toElementMap_bot_le {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
    (f : ApproximableMap V₀ V₁) (h : ∀ {Y}, f.rel V₀.master Y → Y = V₁.master) :
    f.toElementMap V₀.bot ≤ V₁.bot := by
  intro Y hY
  rw [mem_bot]
  exact h ((rel_iff_mem_principal f V₀.master_mem).mpr hY)

end General

section SumHelpers

variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
variable {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}

theorem outMap₀_bot_le :
    (outMap₀ (h₀ := h₀) (h₁ := h₁)).toElementMap (sum V₀ V₁ h₀ h₁).bot ≤ V₀.bot := by
  refine toElementMap_bot_le _ ?_
  intro Y hg
  refine Set.Subset.antisymm (V₀.sub_master hg.2.1) ?_
  have h2 : leftPart V₀ (sumMaster V₀ V₁) ⊆ Y := hg.2.2
  rwa [leftPart_sumMaster] at h2

theorem outMap₁_bot_le :
    (outMap₁ (h₀ := h₀) (h₁ := h₁)).toElementMap (sum V₀ V₁ h₀ h₁).bot ≤ V₁.bot := by
  refine toElementMap_bot_le _ ?_
  intro Y hg
  refine Set.Subset.antisymm (V₁.sub_master hg.2.1) ?_
  have h2 : rightPart V₁ (sumMaster V₀ V₁) ⊆ Y := hg.2.2
  rwa [rightPart_sumMaster] at h2

end SumHelpers

end

section
open NeighborhoodSystem ApproximableMap Exercise326
universe u

section Prod

variable {α : Type u} {E : NeighborhoodSystem α}

theorem toElementMap_funToPair (φ : (funSpace TD E).Element) :
    (funToPair (E := E)).toElementMap φ
      = pair ((toApproxMap φ).toElementMap Example23.trueElt)
          ((toApproxMap φ).toElementMap Example23.falseElt) := by
  simp only [funToPair, toElementMap_paired, toElementMap_comp, toElementMap_idMap,
    toElementMap_constMap, evalMap_apply]

end Prod
```

```
section Sum

variable {α : Type u} {E : NeighborhoodSystem α} (hE : ∀ X, E.mem X → X.Nonempty)

theorem toElementMap_sumToProdT (w : (sum E E hE hE).Element) :
    (sumToProdT hE).toElementMap w
      = pair ((whichMap E E hE hE).toElementMap w)
          (pair ((outMap₀ (h₀ := hE) (h₁ := hE)).toElementMap w)
            ((outMap₁ (h₀ := hE) (h₁ := hE)).toElementMap w)) := by
  simp only [sumToProdT, toElementMap_paired]

theorem condSum_comp_sumToProdT :
    (condSum E E hE hE).comp (sumToProdT hE) = idMap (sum E E hE hE) := by
  apply ext_of_toElementMap
  intro w
  rw [toElementMap_comp, toElementMap_idMap, toElementMap_sumToProdT, condSum,
    toElementMap_comp,
    condSumEmb_toElementMap]
  exact cond_which w

end Sum

section Prod

variable {α : Type u} {E : NeighborhoodSystem α}

theorem toElementMap_swapProdT (x y : E.Element) (t : TD.Element) :
    (swapProdT (E := E)).toElementMap (pair (pair x y) t) = pair t (pair x y) := by
  simp only [swapProdT, toElementMap_paired, toElementMap_proj₀, toElementMap_proj₁,
    fst_pair,
    snd_pair]

theorem toApproxMap_pairToFun (x y : E.Element) (t : TD.Element) :
    (toApproxMap ((pairToFun (E := E)).toElementMap (pair x y))).toElementMap t
      = (cond E).toElementMap (pair t (pair x y)) := by
  rw [pairToFun, toElementMap_curry_apply, toElementMap_comp, toElementMap_swapProdT]

theorem funToPair_comp_pairToFun : (funToPair (E := E)).comp pairToFun = idMap (prod E
    E) := by
  apply ext_of_toElementMap
  intro z
  rw [← pair_fst_snd z]
  set x := z.fst; set y := z.snd
  rw [toElementMap_comp, toElementMap_idMap, toElementMap_funToPair,
    toApproxMap_pairToFun,
    toApproxMap_pairToFun, Exercise326.cond_true, Exercise326.cond_false]

theorem pairToFun_comp_funToPair_le :
    (pairToFun (E := E)).comp funToPair ≤ idMap (funSpace TD E) := by
  rw [le_iff_toElementMap_le]
  intro φ
  rw [toElementMap_comp, toElementMap_idMap, toElementMap_funToPair]
  apply (funSpaceEquiv TD E).map_rel_iff.mp
  rw [funSpaceEquiv_apply, funSpaceEquiv_apply, le_iff_toElementMap_le]
  intro t
  rcases TD_trichotomy t with rfl | rfl | rfl
```

```
  · rw [toApproxMap_pairToFun, Exercise326.cond_bot]; exact E.bot_le _
  · rw [toApproxMap_pairToFun, Exercise326.cond_true]
  · rw [toApproxMap_pairToFun, Exercise326.cond_false]

theorem prod_trianglelefteq_funSpace_TD : prod E E ? funSpace TD E :=
  trianglelefteq_of_projectionPair pairToFun funToPair funToPair_comp_pairToFun
    pairToFun_comp_funToPair_le

theorem prod_trianglelefteq_of (hT : TD ? E) (hArrow : funSpace E E ? E) :
    prod E E ? E :=
  trianglelefteq_trans
    (trianglelefteq_trans prod_trianglelefteq_funSpace_TD (funSpace_dom_trianglelefteq
     E hT))
    hArrow

end Prod

end

section
open NeighborhoodSystem ApproximableMap Exercise326

section SumHelpers

variable {α β : Type*} {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
variable {h₀ : ∀ X, V₀.mem X → X.Nonempty} {h₁ : ∀ Y, V₁.mem Y → Y.Nonempty}

theorem which_bot_le :
    (whichMap V₀ V₁ h₀ h₁).toElementMap (sum V₀ V₁ h₀ h₁).bot ≤ Example23.botElt := by
  rw [← TD_bot_eq_botElt]
  refine toElementMap_bot_le _ ?_
  intro Y hg
  exact whichGuard_masterC hg.2.2 rfl

theorem which_inMap₀_le_trueElt (x : V₀.Element) :
    (whichMap V₀ V₁ h₀ h₁).toElementMap ((inMap₀ (h₀ := h₀) (h₁ := h₁)).toElementMap x)
      ≤ Example23.trueElt := by
  intro Z hZ
  rcases (Example12.mem_iff Z).mp
      (((whichMap V₀ V₁ h₀ h₁).toElementMap
        ((inMap₀ (h₀ := h₀) (h₁ := h₁)).toElementMap x)).sub hZ) with rfl | rfl | rfl
  · exact Example23.trueElt.master_mem
  · show Example23.trueElt.mem Example12.zero
    exact Or.inr rfl
  · exfalso
    obtain ⟨Y, hY, hmem⟩ := which_mem_one.mp hZ
    obtain ⟨X, _, hX0, _, hsub⟩ := hmem
    exact not_inj₀_subset_inj₁ (h₀ X hX0) hsub

theorem which_inMap₁_le_falseElt (y : V₁.Element) :
    (whichMap V₀ V₁ h₀ h₁).toElementMap ((inMap₁ (h₀ := h₀) (h₁ := h₁)).toElementMap y)
      ≤ Example23.falseElt := by
  intro Z hZ
  rcases (Example12.mem_iff Z).mp
      (((whichMap V₀ V₁ h₀ h₁).toElementMap
        ((inMap₁ (h₀ := h₀) (h₁ := h₁)).toElementMap y)).sub hZ) with rfl | rfl | rfl
```

```
  · exact Example23.falseElt.master_mem
  · exfalso
    obtain ⟨X, hX, hmem⟩ := which_mem_zero.mp hZ
    obtain ⟨Y, _, hY0, _, hsub⟩ := hmem
    exact not_inj₁_subset_inj₀ (h₁ Y hY0) hsub
  · show Example23.falseElt.mem Example12.one
    exact Or.inr rfl

end SumHelpers

end

section
open NeighborhoodSystem ApproximableMap Exercise326
universe u

section Sum

variable {α : Type u} {E : NeighborhoodSystem α} (hE : ∀ X, E.mem X → X.Nonempty)

theorem sumToProdT_comp_condSum_le :
    (sumToProdT hE).comp (condSum E E hE hE) ≤ idMap (prod TD (prod E E)) := by
  rw [le_iff_toElementMap_le]
  intro z
  rw [← pair_fst_snd z, ← pair_fst_snd z.snd]
  set t := z.fst; set x := z.snd.fst; set y := z.snd.snd
  clear_value t x y
  rw [toElementMap_comp, toElementMap_idMap]
  rcases TD_trichotomy t with rfl | rfl | rfl
  · rw [condSum_bot, toElementMap_sumToProdT]
    exact pair_le_pair_iff.mpr ⟨which_bot_le,
      pair_le_pair_iff.mpr ⟨outMap₀_bot_le.trans (E.bot_le x), outMap₁_bot_le.trans (E.
    bot_le y)⟩⟩
  · rw [condSum_true, toElementMap_sumToProdT]
    refine pair_le_pair_iff.mpr ⟨which_inMap₀_le_trueElt x, pair_le_pair_iff.mpr ⟨?_, ?
    _⟩⟩
    · have h2 := congrArg (fun (f : ApproximableMap E E) => f.toElementMap x)
        (outMap₀_comp_inMap₀ (h₀ := hE) (h₁ := hE))
      simp only [toElementMap_comp, toElementMap_idMap] at h2
      exact h2.le
    · have h2 := congrArg (fun (f : ApproximableMap E E) => f.toElementMap x)
        (outMap₁_comp_inMap₀ (h₀ := hE) (h₁ := hE))
      simp only [toElementMap_comp, toElementMap_constMap] at h2
      rw [h2]; exact E.bot_le _
  · rw [condSum_false, toElementMap_sumToProdT]
    refine pair_le_pair_iff.mpr ⟨which_inMap₁_le_falseElt y, pair_le_pair_iff.mpr ⟨?_,
    ?_⟩⟩
    · have h2 := congrArg (fun (f : ApproximableMap E E) => f.toElementMap y)
        (outMap₀_comp_inMap₁ (h₀ := hE) (h₁ := hE))
      simp only [toElementMap_comp, toElementMap_constMap] at h2
      rw [h2]; exact E.bot_le _
    · have h2 := congrArg (fun (f : ApproximableMap E E) => f.toElementMap y)
        (outMap₁_comp_inMap₁ (h₀ := hE) (h₁ := hE))
      simp only [toElementMap_comp, toElementMap_idMap] at h2
      exact h2.le
```

```
theorem sum_trianglelefteq_prodT : sum E E hE hE ? prod TD (prod E E) :=
  trianglelefteq_of_projectionPair (sumToProdT hE) (condSum E E hE hE) (
    condSum_comp_sumToProdT hE)


    (sumToProdT_comp_condSum_le hE)

theorem sum_trianglelefteq_of (hT : TD ? E) (hArrow : funSpace E E ? E) :
    sum E E hE hE ? E := by
  have hPE : prod E E ? E := prod_trianglelefteq_of hT hArrow
  exact trianglelefteq_trans
    (trianglelefteq_trans (sum_trianglelefteq_prodT hE) (prod_left_trianglelefteq (
    prod E E) hT))
    (trianglelefteq_trans (prod_right_trianglelefteq E hPE) hPE)

end Sum

end
end DomainTheory.NeighbourhoodSystems
```

SumProdRetracts.lean

```
module

public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_29
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_12
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Lemma_3_6

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    EmbeddingsIntoU
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    EmbeddingsIntoU_more
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap Exercise326
universe u

theorem exercise_8_19_assembly {α : Type u} {E : NeighborhoodSystem α}
    (hE : ∀ X, E.mem X → X.Nonempty) (hT : TD ? E) (hArrow : funSpace E E ? E) :
    sum E E hE hE ? E ∧ prod E E ? E :=
  ⟨sum_trianglelefteq_of hE hT hArrow, prod_trianglelefteq_of hT hArrow⟩
end

set_option linter.unusedVariables false

theorem example_819.{u} : And
  (And
    (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      (hE : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
    E X → @Set.Nonempty α X),
```

```
    @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
  NeighbourhoodSystems.Example12.Token α
        DomainTheory.NeighbourhoodSystems.Exercise326.TD E →
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α E E) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α E E) E →
        And
          (@DomainTheory.NeighbourhoodSystems.Trianglelefteq (Option (Sum α α)) α
            (@DomainTheory.NeighbourhoodSystems.sum α α E E hE hE) E)
          (@DomainTheory.NeighbourhoodSystems.Trianglelefteq (Sum α α) α
            (@DomainTheory.NeighbourhoodSystems.prod α α E E) E))
   (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α},
     @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
  NeighbourhoodSystems.Example12.Token α
        DomainTheory.NeighbourhoodSystems.Exercise326.TD E →
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α E E) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α E E) E →
        @DomainTheory.NeighbourhoodSystems.Trianglelefteq (Sum α α) α
          (@DomainTheory.NeighbourhoodSystems.prod α α E E) E))
(∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
  (hE : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α E
   X → @Set.Nonempty α X),
  @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
  NeighbourhoodSystems.Example12.Token α
      DomainTheory.NeighbourhoodSystems.Exercise326.TD E →
    @DomainTheory.NeighbourhoodSystems.Trianglelefteq (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α E E) α
        (@DomainTheory.NeighbourhoodSystems.funSpace α α E E) E →
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq (Option (Sum α α)) α
        (@DomainTheory.NeighbourhoodSystems.sum α α E E hE hE) E) :=
@And.intro
(And
  (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (hE : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
   E X → @Set.Nonempty α X),
    @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
  NeighbourhoodSystems.Example12.Token α
        DomainTheory.NeighbourhoodSystems.Exercise326.TD E →
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α E E) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α E E) E →
        And
          (@DomainTheory.NeighbourhoodSystems.Trianglelefteq (Option (Sum α α)) α
            (@DomainTheory.NeighbourhoodSystems.sum α α E E hE hE) E)
          (@DomainTheory.NeighbourhoodSystems.Trianglelefteq (Sum α α) α
            (@DomainTheory.NeighbourhoodSystems.prod α α E E) E))
   (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α},
     @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
  NeighbourhoodSystems.Example12.Token α
        DomainTheory.NeighbourhoodSystems.Exercise326.TD E →
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq (@DomainTheory.
  NeighbourhoodSystems.ApproximableMap α α E E) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α E E) E →
        @DomainTheory.NeighbourhoodSystems.Trianglelefteq (Sum α α) α
          (@DomainTheory.NeighbourhoodSystems.prod α α E E) E))
```

```
  (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
    (hE : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α E
     X → @Set.Nonempty α X),
    @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
    NeighbourhoodSystems.Example12.Token α
        DomainTheory.NeighbourhoodSystems.Exercise326.TD E →
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α E E) α
          (@DomainTheory.NeighbourhoodSystems.funSpace α α E E) E →
        @DomainTheory.NeighbourhoodSystems.Trianglelefteq (Option (Sum α α)) α
          (@DomainTheory.NeighbourhoodSystems.sum α α E E hE hE) E)
  (@And.intro
    (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α}
      (hE : ∀ (X : Set α), @DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.mem α
     E X → @Set.Nonempty α X),
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
    NeighbourhoodSystems.Example12.Token α
          DomainTheory.NeighbourhoodSystems.Exercise326.TD E →
        @DomainTheory.NeighbourhoodSystems.Trianglelefteq (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α E E) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α E E) E →
          And
            (@DomainTheory.NeighbourhoodSystems.Trianglelefteq (Option (Sum α α)) α
              (@DomainTheory.NeighbourhoodSystems.sum α α E E hE hE) E)
            (@DomainTheory.NeighbourhoodSystems.Trianglelefteq (Sum α α) α
              (@DomainTheory.NeighbourhoodSystems.prod α α E E) E))
    (∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α},
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq DomainTheory.
    NeighbourhoodSystems.Example12.Token α
          DomainTheory.NeighbourhoodSystems.Exercise326.TD E →
        @DomainTheory.NeighbourhoodSystems.Trianglelefteq (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α E E) α
            (@DomainTheory.NeighbourhoodSystems.funSpace α α E E) E →
          @DomainTheory.NeighbourhoodSystems.Trianglelefteq (Sum α α) α
            (@DomainTheory.NeighbourhoodSystems.prod α α E E) E)
    @DomainTheory.NeighbourhoodSystems.exercise_8_19_assembly @DomainTheory.
    NeighbourhoodSystems.prod_trianglelefteq_of)
  @DomainTheory.NeighbourhoodSystems.sum_trianglelefteq_of

section
open NeighborhoodSystem ApproximableMap
universe u v

section FunSpace

variable {α : Type u} {β : Type v} (A : NeighborhoodSystem α) (B : NeighborhoodSystem
    β)

noncomputable def constFunMap : ApproximableMap B (funSpace A B) := curry (proj₀ B A)

end FunSpace

section Prod

variable {α : Type u} {β : Type v} (A : NeighborhoodSystem α) (B : NeighborhoodSystem
    β)
```

```
noncomputable def embedFst : ApproximableMap A (prod A B) := paired (idMap A) (
    constMap A B.bot)

noncomputable def embedSnd : ApproximableMap B (prod A B) := paired (constMap B A.bot)
     (idMap B)

end Prod

section FunSpace

variable {α : Type u} {β : Type v} (A : NeighborhoodSystem α) (B : NeighborhoodSystem
    β)

noncomputable def evalBotMap : ApproximableMap (funSpace A B) B :=
  (evalMap A B).comp (paired (idMap (funSpace A B)) (constMap (funSpace A B) A.bot))

@[simp] theorem toApproxMap_constFunMap (b : B.Element) (a : A.Element) :
    (toApproxMap ((constFunMap A B).toElementMap b)).toElementMap a = b := by
  rw [constFunMap, toElementMap_curry_apply, toElementMap_proj₀, fst_pair]

end FunSpace

variable {α : Type u} (D : NeighborhoodSystem α)

end

section
open NeighborhoodSystem ApproximableMap
universe u v

section Prod

variable {α : Type u} {β : Type v} (A : NeighborhoodSystem α) (B : NeighborhoodSystem
    β)

theorem embedFst_comp_proj₀_le : (embedFst A B).comp (proj₀ A B) ≤ idMap (prod A B) :=
    by
  rw [le_iff_toElementMap_le]
  intro z
  rw [← pair_fst_snd z]
  set x := z.fst; set y := z.snd
  rw [toElementMap_comp, toElementMap_idMap, toElementMap_proj₀, fst_pair, embedFst,
    toElementMap_paired, toElementMap_idMap, toElementMap_constMap]
  exact pair_le_pair_iff.mpr ⟨le_refl x, B.bot_le y⟩

end Prod
end

section
open NeighborhoodSystem ApproximableMap
universe u

theorem embedFst_ne_embedSnd_of_ne_bot {α : Type u} {D : NeighborhoodSystem α} {x : D.
    Element}
    (hx : x = D.bot) : embedFst D D = embedSnd D D := fun h => hx <| by
```

```
  have heq := congrArg (fun f => f.toElementMap x) h
  simp only [embedFst, embedSnd, toElementMap_paired, toElementMap_idMap,
    toElementMap_constMap] at heq
  simpa using congrArg (·.fst) heq
end

section
open NeighborhoodSystem ApproximableMap
universe u v

section Prod

variable {α : Type u} {β : Type v} (A : NeighborhoodSystem α) (B : NeighborhoodSystem
    β)

theorem embedSnd_comp_proj₁_le : (embedSnd A B).comp (proj₁ A B) ≤ idMap (prod A B) :=
    by
  rw [le_iff_toElementMap_le]
  intro z
  rw [← pair_fst_snd z]
  set x := z.fst; set y := z.snd
  rw [toElementMap_comp, toElementMap_idMap, toElementMap_proj₁, snd_pair, embedSnd,
    toElementMap_paired, toElementMap_idMap, toElementMap_constMap]
  exact pair_le_pair_iff.mpr ⟨A.bot_le x, le_refl y⟩

theorem proj₀_comp_embedFst : (proj₀ A B).comp (embedFst A B) = idMap A := by
  apply le_antisymm <;> rw [le_iff_toElementMap_le] <;> intro a <;>
    simp [embedFst, toElementMap_comp, toElementMap_idMap, toElementMap_paired,
    toElementMap_constMap,
      toElementMap_proj₀, fst_pair]

theorem proj₁_comp_embedSnd : (proj₁ A B).comp (embedSnd A B) = idMap B := by
  apply le_antisymm <;> rw [le_iff_toElementMap_le] <;> intro b <;>
    simp [embedSnd, toElementMap_comp, toElementMap_idMap, toElementMap_paired,
    toElementMap_constMap,
      toElementMap_proj₁, snd_pair]

end Prod

section FunSpace

variable {α : Type u} {β : Type v} (A : NeighborhoodSystem α) (B : NeighborhoodSystem
    β)

theorem toElementMap_evalBotMap (φ : (funSpace A B).Element) :
    (evalBotMap A B).toElementMap φ = (toApproxMap φ).toElementMap A.bot := by
  simp [evalBotMap, toElementMap_comp, toElementMap_paired, toElementMap_idMap,
    toElementMap_constMap, evalMap_apply]

theorem constFunMap_comp_evalBotMap_le :
    (constFunMap A B).comp (evalBotMap A B) ≤ idMap (funSpace A B) := by
  rw [le_iff_toElementMap_le]
  intro φ
  rw [toElementMap_comp, toElementMap_idMap]
  apply (funSpaceEquiv A B).map_rel_iff.mp
  rw [funSpaceEquiv_apply, funSpaceEquiv_apply, le_iff_toElementMap_le]
```

```
  intro a
  rw [toApproxMap_constFunMap, toElementMap_evalBotMap]
  exact toElementMap_mono (toApproxMap φ) (A.bot_le a)

theorem evalBotMap_comp_constFunMap : (evalBotMap A B).comp (constFunMap A B) = idMap
    B := by
  apply le_antisymm <;> rw [le_iff_toElementMap_le] <;> intro b <;>
    rw [toElementMap_comp, toElementMap_idMap, toElementMap_evalBotMap,
    toApproxMap_constFunMap]

theorem trianglelefteq_funSpace_const : B ? funSpace A B :=
  trianglelefteq_of_projectionPair (constFunMap A B) (evalBotMap A B)
    (evalBotMap_comp_constFunMap A B) (constFunMap_comp_evalBotMap_le A B)

end FunSpace

end

section
open NeighborhoodSystem ApproximableMap
universe u
variable {α : Type u} (D : NeighborhoodSystem α)

theorem D_trianglelefteq_funSpace : D ? funSpace D D := trianglelefteq_funSpace_const
    D D
end

section
open NeighborhoodSystem ApproximableMap
universe u v

section Prod

variable {α : Type u} {β : Type v} (A : NeighborhoodSystem α) (B : NeighborhoodSystem
    β)

theorem trianglelefteq_prod_fst : A ? prod A B :=
  trianglelefteq_of_projectionPair (embedFst A B) (proj₀ A B) (proj₀_comp_embedFst A B)
    (embedFst_comp_proj₀_le A B)

end Prod
end

section
open NeighborhoodSystem ApproximableMap
universe u
variable {α : Type u} (D : NeighborhoodSystem α)

theorem D_trianglelefteq_prod : D ? prod D D := trianglelefteq_prod_fst D D

end
end DomainTheory.NeighbourhoodSystems
```

DiagonalRetracts.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_15
public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Table_5_5

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    EmbeddingsIntoU
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Proposition_8_10
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    SumProdRetracts
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap
universe u
variable {α : Type u} (D : NeighborhoodSystem α)

theorem exercise_8_20_assembly : D ? prod D D ∧ D ? funSpace D D :=
  ⟨D_trianglelefteq_prod D, D_trianglelefteq_funSpace D⟩
end

set_option linter.unusedVariables false

theorem example_820.{u} : And
  (And
    (∀ {α : Type u} (D : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
      And
        (@DomainTheory.NeighbourhoodSystems.Trianglelefteq α (Sum α α) D
          (@DomainTheory.NeighbourhoodSystems.prod α α D D))
        (@DomainTheory.NeighbourhoodSystems.Trianglelefteq α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α D D) D
          (@DomainTheory.NeighbourhoodSystems.funSpace α α D D)))
    (∀ {α : Type u} (D : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq α (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α D D) D
        (@DomainTheory.NeighbourhoodSystems.funSpace α α D D)))
  (∀ {α : Type u} (D : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
    @DomainTheory.NeighbourhoodSystems.Trianglelefteq α (Sum α α) D (@DomainTheory.
    NeighbourhoodSystems.prod α α D D)) :=
  @And.intro
  (And
    (∀ {α : Type u} (D : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
      And
        (@DomainTheory.NeighbourhoodSystems.Trianglelefteq α (Sum α α) D
          (@DomainTheory.NeighbourhoodSystems.prod α α D D))
        (@DomainTheory.NeighbourhoodSystems.Trianglelefteq α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α D D) D
          (@DomainTheory.NeighbourhoodSystems.funSpace α α D D)))
    (∀ {α : Type u} (D : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
```

```
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq α (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α D D) D
        (@DomainTheory.NeighbourhoodSystems.funSpace α α D D)))
  (∀ {α : Type u} (D : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
    @DomainTheory.NeighbourhoodSystems.Trianglelefteq α (Sum α α) D (@DomainTheory.
    NeighbourhoodSystems.prod α α D D))
  (@And.intro
    (∀ {α : Type u} (D : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
      And
        (@DomainTheory.NeighbourhoodSystems.Trianglelefteq α (Sum α α) D
          (@DomainTheory.NeighbourhoodSystems.prod α α D D))
        (@DomainTheory.NeighbourhoodSystems.Trianglelefteq α
          (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α D D) D
          (@DomainTheory.NeighbourhoodSystems.funSpace α α D D)))
    (∀ {α : Type u} (D : DomainTheory.NeighbourhoodSystems.NeighborhoodSystem α),
      @DomainTheory.NeighbourhoodSystems.Trianglelefteq α (@DomainTheory.
    NeighbourhoodSystems.ApproximableMap α α D D) D
        (@DomainTheory.NeighbourhoodSystems.funSpace α α D D))
    @DomainTheory.NeighbourhoodSystems.exercise_8_20_assembly @DomainTheory.
    NeighbourhoodSystems.D_trianglelefteq_funSpace)
  @DomainTheory.NeighbourhoodSystems.D_trianglelefteq_prod

section
open NeighborhoodSystem ApproximableMap
universe u v

section Prod

variable {α : Type u} {β : Type v} (A : NeighborhoodSystem α) (B : NeighborhoodSystem
    β)

theorem trianglelefteq_prod_snd : B ? prod A B :=
  trianglelefteq_of_projectionPair (embedSnd A B) (proj₁ A B) (proj₁_comp_embedSnd A B)
    (embedSnd_comp_proj₁_le A B)

end Prod
end

end DomainTheory.NeighbourhoodSystems
```

EmbedIntoPow.lean

```
module

public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Exercise_5_11
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_17
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_29
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise511
```

```
variable {α : Type*} (V : NeighborhoodSystem α)

def embedIntoPow : ApproximableMap V (iterSys V) :=
  (push V).comp (paired (idMap V) (constMap V (iterSys V).bot))

theorem toElementMap_embedIntoPow (x : V.Element) :
    (embedIntoPow V).toElementMap x = (push V).toElementMap (pair x (iterSys V).bot)
    := by
  rw [embedIntoPow, toElementMap_comp, toElementMap_paired, toElementMap_idMap,
    toElementMap_constMap]

theorem component_embedIntoPow_succ (x : V.Element) (n : ℕ) :
    component ((embedIntoPow V).toElementMap x) (n + 1) = V.bot := by
  rw [toElementMap_embedIntoPow, ← component_tail, tail_push, Exercise618.
    component_bot]

theorem component_embedIntoPow_zero (x : V.Element) :
    component ((embedIntoPow V).toElementMap x) 0 = x := by
  rw [toElementMap_embedIntoPow, ← head_apply, head_push]

theorem embedIntoPow_comp_head_le : (embedIntoPow V).comp (head V) ≤ idMap (iterSys V)
     := by
  rw [le_iff_toElementMap_le]
  intro z
  rw [toElementMap_comp, toElementMap_idMap]
  apply le_of_component_le
  intro n
  cases n with
  | zero => rw [component_embedIntoPow_zero, head_apply]
  | succ m => rw [component_embedIntoPow_succ]; exact NeighborhoodSystem.bot_le V _

theorem head_comp_embedIntoPow : (head V).comp (embedIntoPow V) = idMap V :=
  ApproximableMap.ext_of_toElementMap fun x => by
    rw [toElementMap_comp, toElementMap_idMap, head_apply, component_embedIntoPow_zero
    ]

end DomainTheory.NeighbourhoodSystems
```

sumMap.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_9

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap Exercise326

namespace sumMap

universe u
```

```
variable {? ? ?' ?' ?'' ?'' : Type u}

variable {V0 : NeighborhoodSystem ?} {V1 : NeighborhoodSystem ?}

variable {V0' : NeighborhoodSystem ?'} {V1' : NeighborhoodSystem ?'}

variable {V0'' : NeighborhoodSystem ?''} {V1'' : NeighborhoodSystem ?''}

variable {h0 : ∀ X, V0.mem X → X.Nonempty} {h1 : ∀ Y, V1.mem Y → Y.Nonempty}

variable {h0' : ∀ X, V0'.mem X → X.Nonempty} {h1' : ∀ Y, V1'.mem Y → Y.Nonempty}

variable {h0'' : ∀ X, V0''.mem X → X.Nonempty} {h1'' : ∀ Y, V1''.mem Y → Y.Nonempty}

theorem reaches_neither_iff_eq_bot {y : (sum V0 V1 h0 h1).Element} :
    (∀ W, y.mem W → W = (sum V0 V1 h0 h1).master) ↔ y = (sum V0 V1 h0 h1).bot := by
  constructor
  · intro hN
    apply Element.ext
    intro W
    rw [mem_bot]
    exact ⟨hN W, fun h => h ▶ y.master_mem⟩
  · rintro rfl W hW
    rw [mem_bot] at hW
    exact hW

theorem bot (f : ApproximableMap V0 V0') (g : ApproximableMap V1 V1') :
    (sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0') (h₁' := h1') f g).toElementMap
        (sum V0 V1 h0 h1).bot = (sum V0' V1' h0' h1').bot := by
  apply Element.ext
  intro Z
  rw [mem_bot]
  constructor
  · rintro ⟨W, hW, _, hZmem, hd⟩
    rw [mem_bot] at hW
    subst hW
    rcases hd with rfl | ⟨X, Y', hWX, -, -⟩ | ⟨Y, Y', hWY, -, -⟩
    · rfl
    · have hWX' : sumMaster V0 V1 = inj₀ X := hWX
      exact absurd (hWX' ▶ none_mem_sumMaster) none_mem_inj₀
    · have hWY' : sumMaster V0 V1 = inj₁ Y := hWY
      exact absurd (hWY' ▶ none_mem_sumMaster) none_mem_inj₁
  · rintro rfl
    exact ⟨sumMaster V0 V1, (sum V0 V1 h0 h1).mem_bot.mpr rfl, (sum V0 V1 h0 h1).
    master_mem,
      (sum V0' V1' h0' h1').master_mem, Or.inl rfl⟩

theorem reaches_left {f : ApproximableMap V0 V0'} {g : ApproximableMap V1 V1'}
    {y : (sum V0 V1 h0 h1).Element} (hL : ∃ X, V0.mem X ∧ y.mem (inj₀ X)) :
    ∃ X', V0'.mem X' ∧ ((sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0') (h₁' := h1') f g).
    toElementMap
      y).mem (inj₀ X') := by
  obtain ⟨X, hX, hXy⟩ := hL
  have hf : f.rel X V0'.master :=
    f.mono f.master_rel (V0.sub_master hX) subset_rfl hX V0'.master_mem
  exact ⟨V0'.master, V0'.master_mem, inj₀ X, hXy,
```

```
    Or.inr (Or.inl ⟨X, hX, rfl⟩), Or.inr (Or.inl ⟨V0'.master, V0'.master_mem, rfl⟩),
    Or.inr (Or.inl ⟨X, V0'.master, rfl, rfl, hf⟩)⟩

theorem reaches_right {f : ApproximableMap V0 V0'} {g : ApproximableMap V1 V1'}
    {y : (sum V0 V1 h0 h1).Element} (hR : ∃ Y, V1.mem Y ∧ y.mem (inj₁ Y)) :
    ∃ Y', V1'.mem Y' ∧ ((sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0') (h₁' := h1') f g).
    toElementMap
      y).mem (inj₁ Y') := by
  obtain ⟨Y, hY, hYy⟩ := hR
  have hg : g.rel Y V1'.master :=
    g.mono g.master_rel (V1.sub_master hY) subset_rfl hY V1'.master_mem
  exact ⟨V1'.master, V1'.master_mem, inj₁ Y, hYy,
    Or.inr (Or.inr ⟨Y, hY, rfl⟩), Or.inr (Or.inr ⟨V1'.master, V1'.master_mem, rfl⟩),
    Or.inr (Or.inr ⟨Y, V1'.master, rfl, rfl, hg⟩)⟩

variable {? ? ?' ?' ?'' ?'' : Type u}

variable {V0 : NeighborhoodSystem ?} {V1 : NeighborhoodSystem ?}

variable {V0' : NeighborhoodSystem ?'} {V1' : NeighborhoodSystem ?'}

variable {V0'' : NeighborhoodSystem ?''} {V1'' : NeighborhoodSystem ?''}

variable {h0 : ∀ X, V0.mem X → X.Nonempty} {h1 : ∀ Y, V1.mem Y → Y.Nonempty}

variable {h0' : ∀ X, V0'.mem X → X.Nonempty} {h1' : ∀ Y, V1'.mem Y → Y.Nonempty}

variable {h0'' : ∀ X, V0''.mem X → X.Nonempty} {h1'' : ∀ Y, V1''.mem Y → Y.Nonempty}

theorem toElementMap_inMap₀ (f : ApproximableMap V0 V0') (g : ApproximableMap V1 V1')
    (v : V0.Element) :
    (sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0') (h₁' := h1') f g).toElementMap
        ((inMap₀ (h₀ := h0) (h₁ := h1)).toElementMap v) =
      (inMap₀ (h₀ := h0') (h₁ := h1')).toElementMap (f.toElementMap v) := by
  set z := (sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0') (h₁' := h1') f g).toElementMap
    ((inMap₀ (h₀ := h0) (h₁ := h1)).toElementMap v) with hz
  have hLz : ∃ X', V0'.mem X' ∧ z.mem (inj₀ X') :=
    reaches_left (inMap₀_toElementMap_reaches_left v)
  rw [← inMap₀_outMap₀_eq_of_left hLz]
  congr 1
  have heq : (outMap₀ (h₀ := h0') (h₁ := h1')).comp
      ((sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0') (h₁' := h1') f g).comp
        (inMap₀ (h₀ := h0) (h₁ := h1))) = f :=
    outMap₀_comp_sumMap_comp_inMap₀ f g
  calc (outMap₀ (h₀ := h0') (h₁ := h1')).toElementMap z
      = ((outMap₀ (h₀ := h0') (h₁ := h1')).comp
          ((sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0') (h₁' := h1') f g).comp
            (inMap₀ (h₀ := h0) (h₁ := h1)))).toElementMap v := by
        rw [toElementMap_comp, toElementMap_comp, ← hz]
    _ = f.toElementMap v := by rw [heq]

theorem toElementMap_inMap₁ (f : ApproximableMap V0 V0') (g : ApproximableMap V1 V1')
    (w : V1.Element) :
    (sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0') (h₁' := h1') f g).toElementMap
        ((inMap₁ (h₀ := h0) (h₁ := h1)).toElementMap w) =
      (inMap₁ (h₀ := h0') (h₁ := h1')).toElementMap (g.toElementMap w) := by
```

```
  set z := (sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0') (h₁' := h1') f g).toElementMap
    ((inMap₁ (h₀ := h0) (h₁ := h1)).toElementMap w) with hz
  have hRz : ∃ Y', V1'.mem Y' ∧ z.mem (inj₁ Y') :=
    reaches_right (inMap₁_toElementMap_reaches_right w)
  rw [← inMap₁_outMap₁_eq_of_right hRz]
  congr 1
  have heq : (outMap₁ (h₀ := h0') (h₁ := h1')).comp
      ((sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0') (h₁' := h1') f g).comp
        (inMap₁ (h₀ := h0) (h₁ := h1))) = g :=
    outMap₁_comp_sumMap_comp_inMap₁ f g
  calc (outMap₁ (h₀ := h0') (h₁ := h1')).toElementMap z
      = ((outMap₁ (h₀ := h0') (h₁ := h1')).comp
          ((sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0') (h₁' := h1') f g).comp
            (inMap₁ (h₀ := h0) (h₁ := h1)))).toElementMap w := by
        rw [toElementMap_comp, toElementMap_comp, ← hz]
    _ = g.toElementMap w := by rw [heq]

theorem toElementMap_of_left {f : ApproximableMap V0 V0'} {g : ApproximableMap V1 V1'}
    {y : (sum V0 V1 h0 h1).Element} (hL : ∃ X, V0.mem X ∧ y.mem (inj₀ X)) :
    (sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0') (h₁' := h1') f g).toElementMap y =
      (inMap₀ (h₀ := h0') (h₁ := h1')).toElementMap
        (f.toElementMap ((outMap₀ (h₀ := h0) (h₁ := h1)).toElementMap y)) := by
  conv_lhs => rw [← inMap₀_outMap₀_eq_of_left hL]
  exact toElementMap_inMap₀ f g _

theorem toElementMap_of_right {f : ApproximableMap V0 V0'} {g : ApproximableMap V1 V1
    '}
    {y : (sum V0 V1 h0 h1).Element} (hR : ∃ Y, V1.mem Y ∧ y.mem (inj₁ Y)) :
    (sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0') (h₁' := h1') f g).toElementMap y =
      (inMap₁ (h₀ := h0') (h₁ := h1')).toElementMap
        (g.toElementMap ((outMap₁ (h₀ := h0) (h₁ := h1)).toElementMap y)) := by
  conv_lhs => rw [← inMap₁_outMap₁_eq_of_right hR]
  exact toElementMap_inMap₁ f g _

variable {? ? ?' ?' ?'' ?'' : Type u}

variable {V0 : NeighborhoodSystem ?} {V1 : NeighborhoodSystem ?}

variable {V0' : NeighborhoodSystem ?'} {V1' : NeighborhoodSystem ?'}

variable {V0'' : NeighborhoodSystem ?''} {V1'' : NeighborhoodSystem ?''}

variable {h0 : ∀ X, V0.mem X → X.Nonempty} {h1 : ∀ Y, V1.mem Y → Y.Nonempty}

variable {h0' : ∀ X, V0'.mem X → X.Nonempty} {h1' : ∀ Y, V1'.mem Y → Y.Nonempty}

variable {h0'' : ∀ X, V0''.mem X → X.Nonempty} {h1'' : ∀ Y, V1''.mem Y → Y.Nonempty}

theorem comp (f' : ApproximableMap V0' V0'') (f : ApproximableMap V0 V0')
    (g' : ApproximableMap V1' V1'') (g : ApproximableMap V1 V1') :
    sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0'') (h₁' := h1'') (f'.comp f) (g'.comp g) =
      (sumMap (h₀ := h0') (h₁ := h1') (h₀' := h0'') (h₁' := h1'') f' g').comp
        (sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0') (h₁' := h1') f g) := by
  apply ext_of_toElementMap
  intro y
  rw [toElementMap_comp]
```

```
  rcases sum_element_trichotomy y with hL | hR | hN
  · rw [toElementMap_of_left hL, toElementMap_comp, toElementMap_of_left hL,
      toElementMap_of_left (inMap₀_toElementMap_reaches_left _),
      toElementMap_of_comp_eq_idMap outMap₀_comp_inMap₀]
  · rw [toElementMap_of_right hR, toElementMap_comp, toElementMap_of_right hR,
      toElementMap_of_right (inMap₁_toElementMap_reaches_right _),
      toElementMap_of_comp_eq_idMap outMap₁_comp_inMap₁]
  · rw [reaches_neither_iff_eq_bot] at hN
    rw [hN, bot, bot, bot]

variable {? ? ?' ?' ?'' ?'' : Type u}

variable {V0 : NeighborhoodSystem ?} {V1 : NeighborhoodSystem ?}

variable {V0' : NeighborhoodSystem ?'} {V1' : NeighborhoodSystem ?'}

variable {V0'' : NeighborhoodSystem ?''} {V1'' : NeighborhoodSystem ?''}

variable {h0 : ∀ X, V0.mem X → X.Nonempty} {h1 : ∀ Y, V1.mem Y → Y.Nonempty}

variable {h0' : ∀ X, V0'.mem X → X.Nonempty} {h1' : ∀ Y, V1'.mem Y → Y.Nonempty}

variable {h0'' : ∀ X, V0''.mem X → X.Nonempty} {h1'' : ∀ Y, V1''.mem Y → Y.Nonempty}

theorem id : sumMap (h₀ := h0) (h₁ := h1) (h₀' := h0) (h₁' := h1)
    (idMap V0) (idMap V1) = idMap (sum V0 V1 h0 h1) := by
  apply ext_of_toElementMap
  intro y
  rw [toElementMap_idMap]
  rcases sum_element_trichotomy y with hL | hR | hN
  · rw [toElementMap_of_left hL, toElementMap_idMap, inMap₀_outMap₀_eq_of_left hL]
  · rw [toElementMap_of_right hR, toElementMap_idMap, inMap₁_outMap₁_eq_of_right hR]
  · rw [reaches_neither_iff_eq_bot] at hN
    rw [hN, bot]

end sumMap

end DomainTheory.NeighbourhoodSystems
```

atomPair812c.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.V
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    splitSpec812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_8
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    VComputablePresentation
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise
```

```
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

open Classical in

noncomputable def atomPair (? : ℕ → Bool × Bool) : ℕ → Set α × Set β
  | 0 => (D₀.master, D₁.master)
  | (n + 1) =>
      let A := (atomPair ? n).1
      let B := (atomPair ? n).2
      let IJ1 := splitChoice' D₁ hD₁nomin A B (X n)
      let A1 := if (? n).1 then A ∩ X n else A \ X n
      let B1 := if (? n).1 then IJ1.1 else IJ1.2
      let IJ2 := splitChoice' D₀ hD₀nomin B1 A1 (Y n)
      let B2 := if (? n).2 then B1 ∩ Y n else B1 \ Y n
      let A2 := if (? n).2 then IJ2.1 else IJ2.2
      (A2, B2)

end AtomPair

namespace atomPair
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

omit hD₀pos hD₀diff hD₁pos hD₁diff hXmem hYmem hD₀mne hD₁mne in

theorem congr {? ?' : ℕ → Bool × Bool} {n : ℕ} (h : ∀ i < n, ? i = ?' i) :
    atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n = atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' n
     := by
  induction n with
  | zero => rfl
```

```
  | succ n ih =>
    have hprev : atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n =
        atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' n := ih (fun i hi => h i (Nat.
    lt_succ_of_lt hi))
    have hn : ? n = ?' n := h n (Nat.lt_succ_self n)
    show
      (let A := (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
       let B := (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2
       let IJ1 := splitChoice' D₁ hD₁nomin A B (X n)
       let A1 := if (? n).1 then A ∩ X n else A \ X n
       let B1 := if (? n).1 then IJ1.1 else IJ1.2
       let IJ2 := splitChoice' D₀ hD₀nomin B1 A1 (Y n)
       let B2 := if (? n).2 then B1 ∩ Y n else B1 \ Y n
       let A2 := if (? n).2 then IJ2.1 else IJ2.2
       (A2, B2)) =
        (let A := (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' n).1
         let B := (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' n).2
         let IJ1 := splitChoice' D₁ hD₁nomin A B (X n)
         let A1 := if (?' n).1 then A ∩ X n else A \ X n
         let B1 := if (?' n).1 then IJ1.1 else IJ1.2
         let IJ2 := splitChoice' D₀ hD₀nomin B1 A1 (Y n)
         let B2 := if (?' n).2 then B1 ∩ Y n else B1 \ Y n
         let A2 := if (?' n).2 then IJ2.1 else IJ2.2
         (A2, B2))
    rw [hprev, hn]

end AtomPair
end

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem invariant (? : ℕ → Bool × Bool) :
    ∀ n, ((atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1 = ∅ ↔
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 = ∅) ∧
      ((atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1 = ∅ ∨
        D₀.mem (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1) ∧
      ((atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 = ∅ ∨
        D₁.mem (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2) := by
  intro n
  induction n with
  | zero =>
    refine ⟨?_, Or.inr D₀.master_mem, Or.inr D₁.master_mem⟩
    show (D₀.master = ∅ ↔ D₁.master = ∅)
    exact ⟨fun h => absurd h hD₀mne.ne_empty, fun h => absurd h hD₁mne.ne_empty⟩
  | succ n ih =>
```

```
    obtain ⟨ihAB, ihA, ihB⟩ := ih
    set A := (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1 with hAdef
    set B := (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 with hBdef
    have hspec1 := splitChoice'_isSplitSpec D₁ hD₁nomin ihAB ihB (X n)
    set I1 := (splitChoice' D₁ hD₁nomin A B (X n)).1 with hI1def
    set J1 := (splitChoice' D₁ hD₁nomin A B (X n)).2 with hJ1def
    set A1 := (if (? n).1 then A ∩ X n else A \ X n) with hA1def
    set B1 := (if (? n).1 then I1 else J1) with hB1def
    have hA1B1 : A1 = ∅ ↔ B1 = ∅ := by
      by_cases h?1 : (? n).1 = true
      · simp only [hA1def, hB1def, h?1, ite_true]; exact hspec1.2.2.1
      · simp only [hA1def, hB1def, h?1]; exact hspec1.2.2.2.1
    have hA1mem : A1 = ∅ ∨ D₀.mem A1 := by
      by_cases h?1 : (? n).1 = true
      · simp only [hA1def, h?1, ite_true]; exact inter.mem_or_empty hD₀pos ihA (hXmem n
    )
      · simp only [hA1def, h?1]; exact diff.mem_or_empty hD₀diff ihA (hXmem n)
    have hB1mem : B1 = ∅ ∨ D₁.mem B1 := by
      by_cases h?1 : (? n).1 = true
      · simp only [hB1def, h?1, ite_true]; exact hspec1.1
      · simp only [hB1def, h?1]; exact hspec1.2.1
    have hspec2 := splitChoice'_isSplitSpec D₀ hD₀nomin hA1B1.symm hA1mem (Y n)
    set I2 := (splitChoice' D₀ hD₀nomin B1 A1 (Y n)).1 with hI2def
    set J2 := (splitChoice' D₀ hD₀nomin B1 A1 (Y n)).2 with hJ2def
    set B2 := (if (? n).2 then B1 ∩ Y n else B1 \ Y n) with hB2def
    set A2 := (if (? n).2 then I2 else J2) with hA2def
    have hB2A2 : B2 = ∅ ↔ A2 = ∅ := by
      by_cases h?2 : (? n).2 = true
      · simp only [hB2def, hA2def, h?2, ite_true]; exact hspec2.2.2.1
      · simp only [hB2def, hA2def, h?2]; exact hspec2.2.2.2.1
    have hB2mem : B2 = ∅ ∨ D₁.mem B2 := by
      by_cases h?2 : (? n).2 = true
      · simp only [hB2def, h?2, ite_true]; exact inter.mem_or_empty hD₁pos hB1mem (
    hYmem n)
      · simp only [hB2def, h?2]; exact diff.mem_or_empty hD₁diff hB1mem (hYmem n)
    have hA2mem : A2 = ∅ ∨ D₀.mem A2 := by
      by_cases h?2 : (? n).2 = true
      · simp only [hA2def, h?2, ite_true]; exact hspec2.1
      · simp only [hA2def, h?2]; exact hspec2.2.1
    show (A2 = ∅ ↔ B2 = ∅) ∧ (A2 = ∅ ∨ D₀.mem A2) ∧ (B2 = ∅ ∨ D₁.mem B2)
    exact ⟨hB2A2.symm, hA2mem, hB2mem⟩

end AtomPair
end

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

theorem succ_eq (? : ℕ → Bool × Bool) (n : ℕ) :
    atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? (n + 1) =
```

```
      yStep D₀ hD₀nomin
        (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
          (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).1
        (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
          (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).2
        (Y n) (? n).2 := rfl

end AtomPair
end

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem snd_subset (? : ℕ → Bool × Bool) (n : ℕ) :
    (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? (n + 1)).2 ⊆
      (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 := by
  rw [atomPair.succ_eq]
  obtain ⟨ihAB, -, ihB⟩ := atomPair.invariant D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁
    diff
    hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne ? n
  exact (yStep.snd_subset D₀ hD₀nomin _ _ (Y n) (? n).2).trans
    (xStep.snd_subset hD₁nomin ihAB ihB (X n) (? n).1)

end AtomPair
end

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem snd_subset_master (? : ℕ → Bool × Bool) (n : ℕ) :
    (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 ⊆ D₁.master := by
  induction n with
  | zero => exact subset_rfl
  | succ n ih => exact (atomPair.snd_subset D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff
    hD₁nomin
      X Y hXmem hYmem hD₀mne hD₁mne ? n).trans ih
```

```
end AtomPair
end

end atomPair

end DomainTheory.NeighbourhoodSystems
```

expMap.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_9

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap Exercise326

noncomputable def expMap {? ? ?' ?' : Type*} {V0 : NeighborhoodSystem ?} {V1 :
    NeighborhoodSystem ?}
    {V0' : NeighborhoodSystem ?'} {V1' : NeighborhoodSystem ?'}
    (h : ApproximableMap V0' V0) (k : ApproximableMap V1 V1') :
    ApproximableMap (funSpace V0 V1) (funSpace V0' V1') :=
  curry (k.comp ((evalMap V0 V1).comp (prodMap (idMap (funSpace V0 V1)) h)))

namespace expMap

variable {? ? ?' ?' ?'' ?'' : Type*}
variable {V0 : NeighborhoodSystem ?} {V1 : NeighborhoodSystem ?}
variable {V0' : NeighborhoodSystem ?'} {V1' : NeighborhoodSystem ?'}
variable {V0'' : NeighborhoodSystem ?''} {V1'' : NeighborhoodSystem ?''}

theorem eq (h : ApproximableMap V0' V0) (k : ApproximableMap V1 V1') :
    expMap h k = curry (k.comp ((evalMap V0 V1).comp (prodMap (idMap (funSpace V0 V1))
     h))) := rfl

theorem eq_lamComb (a b : ApproximableMap U U) : expMap a b = lamComb a b := rfl

theorem toApproxMap_toElementMap (h : ApproximableMap V0' V0) (k : ApproximableMap V1
    V1')
    (φ : (funSpace V0 V1).Element) :
    toApproxMap ((expMap h k).toElementMap φ) = k.comp ((toApproxMap φ).comp h) := by
  apply ext_of_toElementMap
  intro z
  rw [eq, toElementMap_curry_apply, toElementMap_comp, toElementMap_comp,
    toElementMap_prodMap_pair, toElementMap_idMap, evalMap_apply, toElementMap_comp,
    toElementMap_comp]

theorem comp (h : ApproximableMap V0' V0) (k : ApproximableMap V1 V1')
    (h' : ApproximableMap V0'' V0') (k' : ApproximableMap V1' V1'') :
    expMap (h.comp h') (k'.comp k) = (expMap h' k').comp (expMap h k) := by
  apply ext_of_toElementMap
```

```
  intro φ
  apply (funSpaceEquiv V0'' V1'').injective
  rw [funSpaceEquiv_apply, funSpaceEquiv_apply, toApproxMap_toElementMap,
    toElementMap_comp,
    toApproxMap_toElementMap, toApproxMap_toElementMap]
  simp only [comp_assoc]

theorem id : expMap (idMap V0) (idMap V1) = idMap (funSpace V0 V1) := by
  apply ext_of_toElementMap
  intro φ
  apply (funSpaceEquiv V0 V1).injective
  rw [funSpaceEquiv_apply, funSpaceEquiv_apply, toElementMap_idMap,
    toApproxMap_toElementMap, comp_idMap, idMap_comp]

theorem mono_left {h h' : ApproximableMap V0' V0} (hh : h ≤ h') (k : ApproximableMap
    V1 V1') :
    expMap h k ≤ expMap h' k := by
  rw [le_iff_toElementMap_le]
  intro φ
  apply (funSpaceEquiv V0' V1').map_rel_iff.mp
  rw [funSpaceEquiv_apply, funSpaceEquiv_apply, toApproxMap_toElementMap,
    toApproxMap_toElementMap]
  exact comp_mono_gen le_rfl (comp_mono_gen le_rfl hh)

end expMap

end DomainTheory.NeighbourhoodSystems
```

arrowComb.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_9
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.expMap

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap Exercise326

noncomputable def arrowComb (a b : ApproximableMap U U) : ApproximableMap U U :=
  iArrow.comp ((lamComb a b).comp jArrow)

namespace arrowComb

theorem eq (a b : ApproximableMap U U) :
    arrowComb a b = iArrow.comp ((lamComb a b).comp jArrow) := rfl

theorem toElementMap (a b : ApproximableMap U U) (x : U.Element) :
    (arrowComb a b).toElementMap x =
      iArrow.toElementMap ((lamComb a b).toElementMap (jArrow.toElementMap x)) := by
  rw [eq]
  simp only [toElementMap_comp]
```

```
theorem isRetraction {a b : ApproximableMap U U} (ha : Retraction a)
    (hb : Retraction b) : Retraction (arrowComb a b) := by
  constructor
  apply ext_of_toElementMap
  intro x
  rw [toElementMap_comp, toElementMap a b ((arrowComb a b).toElementMap x),
    toElementMap a b x, toElementMap_of_comp_eq_idMap jArrow_comp_iArrow,
    toElementMap_idem_of_isRetraction (isRetraction_lamComb ha hb)]

theorem le_idMap {a b : ApproximableMap U U} (ha : a ≤ idMap U) (hb : b ≤ idMap U) :
    arrowComb a b ≤ idMap U := by
  rw [le_iff_toElementMap_le]
  intro x
  rw [toElementMap, toElementMap_idMap]
  calc iArrow.toElementMap ((lamComb a b).toElementMap (jArrow.toElementMap x))
      ≤ iArrow.toElementMap (jArrow.toElementMap x) :=
        iArrow.toElementMap_mono
          (toElementMap_le_self_of_le_idMap (le_idMap_lamComb ha hb) _)
    _ ≤ x := toElementMap_le_of_comp_le_idMap iArrow_comp_jArrow_le x

theorem isProjection {a b : ApproximableMap U U}
    (ha : IsProjection a) (hb : IsProjection b) : IsProjection (arrowComb a b) :=
  ⟨isRetraction ha.1 hb.1, le_idMap ha.2 hb.2⟩

noncomputable def I (a b : ApproximableMap U U) :
    ApproximableMap (funSpace (fixedNbhd a) (fixedNbhd b)) U :=
  iArrow.comp (expMap (fixedNbhd_subsystem a).proj (fixedNbhd_subsystem b).inj)

noncomputable def J (a b : ApproximableMap U U) :
    ApproximableMap U (funSpace (fixedNbhd a) (fixedNbhd b)) :=
  (expMap (fixedNbhd_subsystem a).inj (fixedNbhd_subsystem b).proj).comp jArrow

theorem J_comp_I (a b : ApproximableMap U U) :
    (J a b).comp (I a b) = idMap (funSpace (fixedNbhd a) (fixedNbhd b)) := by
  unfold J I
  rw [comp_assoc, ← comp_assoc jArrow iArrow (expMap _ _), jArrow_comp_iArrow,
    idMap_comp,
    ← expMap.comp, (fixedNbhd_subsystem a).proj_comp_inj, (fixedNbhd_subsystem b).
    proj_comp_inj,
    expMap.id]

end arrowComb

end DomainTheory.NeighbourhoodSystems
```

TreeVal.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.finGen
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_8
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
```

```
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive

def QBody (r : ℕ → ℕ) (prev : ℕ → ℕ) (c : ℕ) : ℕ :=
  selectFn (isOne (1 - c.unpair.1)) (r c.unpair.2)
    (selectFn (isOne (2 - c.unpair.1))
      (Uinter (prev c.unpair.2.unpair.1) (prev c.unpair.2.unpair.2))
      UComputablePresentation.masterIdx)

theorem QBody_local (r : ℕ → ℕ) (f g : ℕ → ℕ) (c : ℕ)
    (h1 : f c.unpair.2.unpair.1 = g c.unpair.2.unpair.1)
    (h2 : f c.unpair.2.unpair.2 = g c.unpair.2.unpair.2) :
    QBody r f c = QBody r g c := by
  unfold QBody
  rw [h1, h2]

def QFuel (r : ℕ → ℕ) : ℕ → ℕ → ℕ
  | 0, _ => 0
  | fuel + 1, c => QBody r (QFuel r fuel) c

def QLookup (r : ℕ → ℕ) (w : ℕ) : ℕ := QBody r (fun c' => nthCode w.unpair.1 c' 0) w.
    unpair.2

theorem QFuel_fuelTable_eq (r : ℕ → ℕ) :
    ∀ fuel bound c, c ≤ bound →
      nthCode (fuelTable (QLookup r) bound fuel) c 0 = QFuel r fuel c :=
  fuelTable_eq_of_recursion (F := QFuel r) (Body := QBody r) (fun _ => rfl) (fun _ _
    => rfl)
    (fun table c => by unfold QLookup QBody; simp only [unpair_pair_fst,
    unpair_pair_snd])
    (fun f g c h => QBody_local r f g c
      (h c.unpair.2.unpair.1 (le_trans (unpair_left_le c.unpair.2) (unpair_snd_le c)))
      (h c.unpair.2.unpair.2 (le_trans (unpair_snd_le c.unpair.2) (unpair_snd_le c))))

def QstepFn (r : ℕ → ℕ) (t : ℕ) : ℕ := Uinter t.unpair.2.unpair.1 (r t.unpair.1)

def Q'Xcode (r : ℕ → ℕ) (n : ℕ) : ℕ :=
  foldCode (QstepFn r) 0 UComputablePresentation.masterIdx n

def Q'X (r : ℕ → ℕ) (n : ℕ) : Set ? := UX (Q'Xcode r n)

theorem Q'X_eq (r : ℕ → ℕ) (n : ℕ) :
    Q'X r n = UX (idxchain UComputablePresentation (List.map r (decodeList n))) := by
  have hstep : (fun (acc x : ℕ) => QstepFn r (Nat.pair x (Nat.pair acc 0)))
      = fun acc x => Uinter acc (r x) := by
    funext acc x; unfold QstepFn; simp only [unpair_pair_fst, unpair_pair_snd]
  unfold Q'X Q'Xcode idxchain
  rw [foldCode_eq', hstep, List.foldl_map]
  rfl
```

```
def TreeVal (r : ℕ → ℕ) (c : ℕ) : ℕ := QFuel r (c + 1) c

theorem TreeVal_of_tag0 (r : ℕ → ℕ) {c : ℕ} (h : c.unpair.1 = 0) : TreeVal r c = r c.
    unpair.2 := by
  have h1 : isOne (1 - c.unpair.1) = 1 := by rw [h]; rfl
  show QBody r (QFuel r c) c = r c.unpair.2
  unfold QBody
  simp only [h1, selectFn_one]

theorem TreeVal_of_tag_ge2 (r : ℕ → ℕ) {c : ℕ} (h : 2 ≤ c.unpair.1) :
    TreeVal r c = UComputablePresentation.masterIdx := by
  have h1 : isOne (1 - c.unpair.1) = 0 := by
    have : (1 - c.unpair.1 : ℕ) = 0 := by omega
    rw [this]; rfl
  have h2 : isOne (2 - c.unpair.1) = 0 := by
    have : (2 - c.unpair.1 : ℕ) = 0 := by omega
    rw [this]; rfl
  show QBody r (QFuel r c) c = UComputablePresentation.masterIdx
  unfold QBody
  simp only [h1, h2, selectFn_zero]

theorem UX_Uinter_dichotomy (n m : ℕ) :
    UX (Uinter n m) = U.master ∨ UX (Uinter n m) = UX n ∩ UX m := by
  have hUXeq : UX (Uinter n m) = presentedIntervals (canonList (decodeQPairList (
    Uinter n m))) :=
    UX_eq (Uinter n m)
  have hL : presentedIntervals (decodeQPairList (Uinter n m)) = UX n ∩ UX m := by
    show presentedIntervals (decodeQPairList (combineCode (canonCode n) (canonCode m))
    )
        = UX n ∩ UX m
    rw [presentedIntervals_decodeQPairList_combineCode]
    rfl
  rcases hfilt : ((decodeQPairList (Uinter n m)).map qpClip).filter
      (fun p => decide (p.1 < p.2)) with _ | ⟨a, l⟩
  · left
    rw [hUXeq, canonList_eq_of_filter_eq_nil hfilt,
    presentedIntervals_singleton_zero_one]
  · right
    rw [hUXeq, canonList_eq_of_filter_eq_cons hfilt, ← hfilt,
    presentedIntervals_filter_qpPos,
      presentedIntervals_map_qpClip, hL]
    obtain ⟨-, -, hsubn⟩ := U_mem_UX n
    exact Set.inter_eq_left.mpr (Set.inter_subset_left.trans hsubn)

theorem exists_preimage_of_forall_mem {r : ℕ → ℕ} {l : List ℕ} (h : ∀ i ∈ l, ∃ n, r n
     = i) :
    ∃ l0 : List ℕ, l0.map r = l := by
  induction l with
  | nil => exact ⟨[], rfl⟩
  | cons i l' ih =>
    obtain ⟨n0, hn0⟩ := h i List.mem_cons_self
    obtain ⟨l0', hl0'⟩ := ih (fun j hj => h j (List.mem_cons_of_mem i hj))
    exact ⟨n0 :: l0', by simp [hn0, hl0']⟩

def leafCode (j : ℕ) : ℕ := Nat.pair 0 j
```

```
theorem TreeVal_leaf (r : ℕ → ℕ) (j : ℕ) : TreeVal r (leafCode j) = r j := by
  have htag : (leafCode j).unpair.1 = 0 := by unfold leafCode; rw [unpair_pair_fst]
  have hpay : (leafCode j).unpair.2 = j := by unfold leafCode; rw [unpair_pair_snd]
  have h1 : isOne (1 - (leafCode j).unpair.1) = 1 := by rw [htag]; rfl
  show QBody r (QFuel r (leafCode j)) (leafCode j) = r j
  unfold QBody
  simp only [h1, hpay, selectFn_one]

def masterCode : ℕ := Nat.pair 2 0

theorem TreeVal_master (r : ℕ → ℕ) : TreeVal r masterCode = UComputablePresentation.
    masterIdx := by
  have htag : masterCode.unpair.1 = 2 := by unfold masterCode; rw [unpair_pair_fst]
  have h1 : isOne (1 - masterCode.unpair.1) = 0 := by rw [htag]; rfl
  have h2 : isOne (2 - masterCode.unpair.1) = 0 := by rw [htag]; rfl
  show QBody r (QFuel r masterCode) masterCode = UComputablePresentation.masterIdx
  unfold QBody
  simp only [h1, h2, selectFn_zero]

def nodeCode (t1 t2 : ℕ) : ℕ := Nat.pair 1 (Nat.pair t1 t2)

theorem primrec_QLookup (r : ℕ → ℕ) (hr : Nat.Primrec r) : Nat.Primrec (QLookup r) :=
     by
  have hleaf : Nat.Primrec (fun w : ℕ => r w.unpair.2.unpair.2) :=
    hr.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hleft : Nat.Primrec (fun w : ℕ => nthCode w.unpair.1 w.unpair.2.unpair.2.unpair
    .1 0) :=
    (primrec_nthCode.comp (Nat.Primrec.left.pair
      ((Nat.Primrec.left.comp (Nat.Primrec.right.comp Nat.Primrec.right)).pair
        (Nat.Primrec.const 0)))).of_eq fun w => by simp only [unpair_pair_fst,
    unpair_pair_snd]
  have hright : Nat.Primrec (fun w : ℕ => nthCode w.unpair.1 w.unpair.2.unpair.2.
    unpair.2 0) :=
    (primrec_nthCode.comp (Nat.Primrec.left.pair
      ((Nat.Primrec.right.comp (Nat.Primrec.right.comp Nat.Primrec.right)).pair
        (Nat.Primrec.const 0)))).of_eq fun w => by simp only [unpair_pair_fst,
    unpair_pair_snd]
  have hnode : Nat.Primrec (fun w : ℕ =>
      Uinter (nthCode w.unpair.1 w.unpair.2.unpair.2.unpair.1 0)
        (nthCode w.unpair.1 w.unpair.2.unpair.2.unpair.2 0)) :=
    (Uinter_primrec.comp (hleft.pair hright)).of_eq fun w => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have htag : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hisone1 : Nat.Primrec (fun w : ℕ => isOne (1 - w.unpair.2.unpair.1)) :=
    primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 1) htag)
  have hisone2 : Nat.Primrec (fun w : ℕ => isOne (2 - w.unpair.2.unpair.1)) :=
    primrec_isOne.comp (primrec_sub₂ (Nat.Primrec.const 2) htag)
  refine (primrec_selectFn hisone1 hleaf
    (primrec_selectFn hisone2 hnode (Nat.Primrec.const UComputablePresentation.
    masterIdx))).of_eq
    fun w => ?_
  show _ = QLookup r w
  unfold QLookup QBody
  match tag : w.unpair.2.unpair.1 with
  | 0 =>
```

```
    have h10 : (1 - 0 : ℕ) = 1 := rfl
    simp only [h10, isOne_one, selectFn_one]
  | 1 =>
    have h01' : (1 - 1 : ℕ) = 0 := rfl
    have h12' : (2 - 1 : ℕ) = 1 := rfl
    simp only [h01', h12', isOne_zero, isOne_one, selectFn_zero, selectFn_one]
  | t + 2 =>
    have h01' : (1 - (t + 2) : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    have h12' : (2 - (t + 2) : ℕ) = 0 := Nat.sub_eq_zero_of_le (by omega)
    simp only [h01', h12', isOne_zero, selectFn_zero]

theorem primrec_QFuel2 (r : ℕ → ℕ) (hr : Nat.Primrec r) :
    Nat.Primrec (fun s : ℕ => QFuel r s.unpair.1 s.unpair.2) := by
  have hft := primrec_fuelTable (primrec_QLookup r hr)
  have hpack : Nat.Primrec (fun s : ℕ => Nat.pair s.unpair.2 s.unpair.1) :=
    Nat.Primrec.pair Nat.Primrec.right Nat.Primrec.left
  have hcomp : Nat.Primrec (fun s => fuelTable (QLookup r) s.unpair.2 s.unpair.1) :=
    (hft.comp hpack).of_eq fun s => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hnth : Nat.Primrec
      (fun s => nthCode (fuelTable (QLookup r) s.unpair.2 s.unpair.1) s.unpair.2 0) :=
    (primrec_nthCode.comp
      (hcomp.pair ((Nat.Primrec.right).pair (Nat.Primrec.const 0)))).of_eq
      fun s => by simp only [unpair_pair_fst, unpair_pair_snd]
  exact hnth.of_eq fun s => QFuel_fuelTable_eq r s.unpair.1 s.unpair.2 s.unpair.2 (
    le_refl _)

theorem primrec_TreeVal (r : ℕ → ℕ) (hr : Nat.Primrec r) : Nat.Primrec (TreeVal r) :=
     by
  have h2 := primrec_QFuel2 r hr
  have hpack : Nat.Primrec (fun c : ℕ => Nat.pair (c + 1) c) :=
    (primrec_add₂ Nat.Primrec.id (Nat.Primrec.const 1)).pair Nat.Primrec.id
  refine (h2.comp hpack).of_eq fun c => ?_
  show QFuel r (Nat.pair (c + 1) c).unpair.1 (Nat.pair (c + 1) c).unpair.2 = TreeVal r
     c
  rw [unpair_pair_fst, unpair_pair_snd]
  rfl

theorem unpair_snd_lt_of_unpair_fst_pos {c : ℕ} (h : 0 < c.unpair.1) : c.unpair.2 < c
    := by
  have h1 : c.unpair.2 ≤ Nat.pair 0 c.unpair.2 := le_pair_right 0 c.unpair.2
  have h2 : Nat.pair 0 c.unpair.2 < Nat.pair c.unpair.1 c.unpair.2 := Nat.
    pair_lt_pair_left _ h
  rw [Nat.pair_unpair] at h2
  omega

theorem QFuel_stable (r : ℕ → ℕ) :
    ∀ c fuel fuel', c < fuel → c < fuel' → QFuel r fuel c = QFuel r fuel' c := by
  intro c
  induction c using Nat.strong_induction_on with
  | _ c ih =>
    intro fuel fuel' hfuel hfuel'
    obtain ⟨f, rfl⟩ : ∃ f, fuel = f + 1 := ⟨fuel - 1, by omega⟩
    obtain ⟨f', rfl⟩ : ∃ f', fuel' = f' + 1 := ⟨fuel' - 1, by omega⟩
    show QBody r (QFuel r f) c = QBody r (QFuel r f') c
    rcases Nat.eq_zero_or_pos c.unpair.1 with htag0 | htagpos
    · have hval : isOne (1 - c.unpair.1) = 1 := by rw [htag0]; rfl
```

```
      unfold QBody
      simp only [hval, selectFn_one]
    · have hsndlt : c.unpair.2 < c := unpair_snd_lt_of_unpair_fst_pos htagpos
      have h1lt : c.unpair.2.unpair.1 < c := lt_of_le_of_lt (unpair_left_le c.unpair
    .2) hsndlt
      have h2lt : c.unpair.2.unpair.2 < c := lt_of_le_of_lt (unpair_snd_le c.unpair.2)
     hsndlt
      have hfc : c ≤ f := by omega
      have hfc' : c ≤ f' := by omega
      have e1 := ih c.unpair.2.unpair.1 h1lt f f'
        (lt_of_lt_of_le h1lt hfc) (lt_of_lt_of_le h1lt hfc')
      have e2 := ih c.unpair.2.unpair.2 h2lt f f'
        (lt_of_lt_of_le h2lt hfc) (lt_of_lt_of_le h2lt hfc')
      exact QBody_local r (QFuel r f) (QFuel r f') c e1 e2

theorem TreeVal_eq_QFuel (r : ℕ → ℕ) {c fuel : ℕ} (h : c < fuel) : TreeVal r c =
    QFuel r fuel c :=
  QFuel_stable r c (c + 1) fuel (Nat.lt_succ_self c) h

theorem TreeVal_of_tag1 (r : ℕ → ℕ) {c : ℕ} (h : c.unpair.1 = 1) :
    TreeVal r c = Uinter (TreeVal r c.unpair.2.unpair.1) (TreeVal r c.unpair.2.unpair
    .2) := by
  have h1 : isOne (1 - c.unpair.1) = 0 := by rw [h]; rfl
  have h2 : isOne (2 - c.unpair.1) = 1 := by rw [h]; rfl
  have hsndlt : c.unpair.2 < c := unpair_snd_lt_of_unpair_fst_pos (by omega)
  have ht1 : c.unpair.2.unpair.1 < c := lt_of_le_of_lt (unpair_left_le c.unpair.2)
    hsndlt
  have ht2 : c.unpair.2.unpair.2 < c := lt_of_le_of_lt (unpair_snd_le c.unpair.2)
    hsndlt
  show QBody r (QFuel r c) c = Uinter (TreeVal r c.unpair.2.unpair.1) (TreeVal r c.
    unpair.2.unpair.2)
  unfold QBody
  simp only [h1, h2, selectFn_zero, selectFn_one]
  rw [TreeVal_eq_QFuel r ht1, TreeVal_eq_QFuel r ht2]

theorem nodeCode_fst_lt (t1 t2 : ℕ) : t1 < nodeCode t1 t2 := by
  have hpos : 0 < (nodeCode t1 t2).unpair.1 := by
    unfold nodeCode; rw [unpair_pair_fst]; omega
  have hsnd : (nodeCode t1 t2).unpair.2 < nodeCode t1 t2 :=
    unpair_snd_lt_of_unpair_fst_pos hpos
  have ht1 : t1 ≤ (nodeCode t1 t2).unpair.2 := by
    unfold nodeCode; rw [unpair_pair_snd]; exact le_pair_left t1 t2
  omega

theorem nodeCode_snd_lt (t1 t2 : ℕ) : t2 < nodeCode t1 t2 := by
  have hpos : 0 < (nodeCode t1 t2).unpair.1 := by
    unfold nodeCode; rw [unpair_pair_fst]; omega
  have hsnd : (nodeCode t1 t2).unpair.2 < nodeCode t1 t2 :=
    unpair_snd_lt_of_unpair_fst_pos hpos
  have ht2 : t2 ≤ (nodeCode t1 t2).unpair.2 := by
    unfold nodeCode; rw [unpair_pair_snd]; exact le_pair_right t1 t2
  omega

theorem TreeVal_node (r : ℕ → ℕ) (t1 t2 : ℕ) :
    TreeVal r (nodeCode t1 t2) = Uinter (TreeVal r t1) (TreeVal r t2) := by
  have ht1 : t1 < nodeCode t1 t2 := nodeCode_fst_lt t1 t2
```

```
  have ht2 : t2 < nodeCode t1 t2 := nodeCode_snd_lt t1 t2
  have htag : (nodeCode t1 t2).unpair.1 = 1 := by unfold nodeCode; rw [unpair_pair_fst
    ]
  have hc1 : (nodeCode t1 t2).unpair.2.unpair.1 = t1 := by
    unfold nodeCode; rw [unpair_pair_snd, unpair_pair_fst]
  have hc2 : (nodeCode t1 t2).unpair.2.unpair.2 = t2 := by
    unfold nodeCode; rw [unpair_pair_snd, unpair_pair_snd]
  have h1 : isOne (1 - (nodeCode t1 t2).unpair.1) = 0 := by rw [htag]; rfl
  have h2 : isOne (2 - (nodeCode t1 t2).unpair.1) = 1 := by rw [htag]; rfl
  show QBody r (QFuel r (nodeCode t1 t2)) (nodeCode t1 t2) = Uinter (TreeVal r t1) (
    TreeVal r t2)
  unfold QBody
  simp only [h1, h2, hc1, hc2, selectFn_zero, selectFn_one]
  rw [TreeVal_eq_QFuel r ht1, TreeVal_eq_QFuel r ht2]

theorem primrec_QstepFn {r : ℕ → ℕ} (hr : Nat.Primrec r) : Nat.Primrec (QstepFn r) :=
     by
  unfold QstepFn
  have h1 : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.right
  have h2 : Nat.Primrec (fun t : ℕ => r t.unpair.1) := hr.comp Nat.Primrec.left
  exact (Uinter_primrec.comp (h1.pair h2)).of_eq fun t => by
    simp only [unpair_pair_fst, unpair_pair_snd]

theorem primrec_Q'Xcode {r : ℕ → ℕ} (hr : Nat.Primrec r) : Nat.Primrec (Q'Xcode r) :=
  primrec_foldCode (primrec_QstepFn hr) (Nat.Primrec.const 0)
    (Nat.Primrec.const UComputablePresentation.masterIdx) Nat.Primrec.id

end DomainTheory.NeighbourhoodSystems
```

ratCodes.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_1
public import Mathlib.Data.Nat.Bitwise
public import Mathlib.Data.Rat.Defs

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open Domain.Recursive

def decodeInt (c : ℕ) : Int := (c.unpair.1 : Int) - (c.unpair.2 : Int)

def encodeInt (z : Int) : ℕ := Nat.pair z.toNat (-z).toNat

@[simp] theorem decodeInt_encodeInt (z : Int) : decodeInt (encodeInt z) = z := by
  unfold decodeInt encodeInt
  rw [unpair_pair]
  by_cases h : 0 ≤ z
  · have hz : (z.toNat : Int) = z := Int.toNat_of_nonneg h
    have hnz : ((-z).toNat : Int) = 0 := by
```

```
      have := Int.toNat_of_nonpos (show -z ≤ 0 by omega); simp [this]
    rw [hz, hnz]; ring
  · have h' : z < 0 := by omega
    have hz : (z.toNat : Int) = 0 := by
      have := Int.toNat_of_nonpos (show z ≤ 0 from h'.le); simp [this]
    have hnz : ((-z).toNat : Int) = -z := Int.toNat_of_nonneg (by omega)
    rw [hz, hnz]; ring

def decodeRat (c : ℕ) : ? := mkRat (decodeInt c.unpair.1) (c.unpair.2 + 1)

def encodeRat (q : ?) : ℕ := Nat.pair (encodeInt q.num) (q.den - 1)

@[simp] theorem decodeRat_encodeRat (q : ?) : decodeRat (encodeRat q) = q := by
  unfold decodeRat encodeRat
  rw [unpair_pair, decodeInt_encodeInt]
  have hden : q.den - 1 + 1 = q.den := by
    have := q.den_nz; omega
  rw [hden, Rat.mkRat_self]

def oneCode : ℕ := Nat.pair (Nat.pair 1 0) 0

def qDen (c : ℕ) : ℕ := c.unpair.2 + 1

def qNumN (c : ℕ) : ℕ := c.unpair.1.unpair.2

def qNumP (c : ℕ) : ℕ := c.unpair.1.unpair.1

theorem decodeRat_eq (c : ℕ) :
    decodeRat c = mkRat ((qNumP c : Int) - (qNumN c : Int)) (qDen c) := by
  unfold decodeRat decodeInt qNumP qNumN qDen; rfl

def ratLeCode (t : ℕ) : ℕ :=
  let c1 := t.unpair.1; let c2 := t.unpair.2
  isZero ((qNumP c1 * qDen c2 + qNumN c2 * qDen c1) -
    (qNumP c2 * qDen c1 + qNumN c1 * qDen c2))

def ratLtCode (t : ℕ) : ℕ := 1 - ratLeCode (Nat.pair t.unpair.2 t.unpair.1)

def ratMaxCode (t : ℕ) : ℕ := selectFn (ratLeCode t) t.unpair.2 t.unpair.1

def ratMinCode (t : ℕ) : ℕ := selectFn (ratLeCode t) t.unpair.1 t.unpair.2

def zeroCode : ℕ := Nat.pair (Nat.pair 0 0) 0

@[simp] theorem decodeRat_zeroCode : decodeRat zeroCode = 0 := by
  rw [decodeRat_eq]; norm_num [zeroCode, qNumP, qNumN, qDen, unpair_pair]

@[simp] theorem decodeRat_oneCode : decodeRat oneCode = 1 := by
  rw [decodeRat_eq]; norm_num [oneCode, qNumP, qNumN, qDen, unpair_pair]

def ratMidCode (t : ℕ) : ℕ :=
  let c1 := t.unpair.1; let c2 := t.unpair.2
  Nat.pair (Nat.pair (qNumP c1 * qDen c2 + qNumP c2 * qDen c1)
                     (qNumN c1 * qDen c2 + qNumN c2 * qDen c1))
    (2 * qDen c1 * qDen c2 - 1)
```

```
theorem decodeRat_surjective : Function.Surjective decodeRat :=
  fun q => ⟨encodeRat q, decodeRat_encodeRat q⟩

theorem primrec_qDen : Nat.Primrec qDen :=
  Nat.Primrec.succ.comp Nat.Primrec.right

theorem primrec_qNumN : Nat.Primrec qNumN := Nat.Primrec.right.comp Nat.Primrec.left

theorem primrec_qNumP : Nat.Primrec qNumP := Nat.Primrec.left.comp Nat.Primrec.left

theorem primrec_ratLeCode : Nat.Primrec ratLeCode := by
  have hc1 : Nat.Primrec (fun t : ℕ => t.unpair.1) := Nat.Primrec.left
  have hc2 : Nat.Primrec (fun t : ℕ => t.unpair.2) := Nat.Primrec.right
  have hlhs : Nat.Primrec (fun t : ℕ =>
      qNumP t.unpair.1 * qDen t.unpair.2 + qNumN t.unpair.2 * qDen t.unpair.1) :=
    primrec_add₂ (primrec_mul₂ (primrec_qNumP.comp hc1) (primrec_qDen.comp hc2))
      (primrec_mul₂ (primrec_qNumN.comp hc2) (primrec_qDen.comp hc1))
  have hrhs : Nat.Primrec (fun t : ℕ =>
      qNumP t.unpair.2 * qDen t.unpair.1 + qNumN t.unpair.1 * qDen t.unpair.2) :=
    primrec_add₂ (primrec_mul₂ (primrec_qNumP.comp hc2) (primrec_qDen.comp hc1))
      (primrec_mul₂ (primrec_qNumN.comp hc1) (primrec_qDen.comp hc2))
  exact (primrec_isZero.comp (primrec_sub₂ hlhs hrhs)).of_eq fun t => by
    simp only [ratLeCode]

theorem primrec_ratLtCode : Nat.Primrec ratLtCode :=
  primrec_sub₂ (Nat.Primrec.const 1)
    (primrec_ratLeCode.comp (Nat.Primrec.right.pair Nat.Primrec.left))

theorem primrec_ratMaxCode : Nat.Primrec ratMaxCode :=
  primrec_selectFn primrec_ratLeCode Nat.Primrec.right Nat.Primrec.left

theorem primrec_ratMidCode : Nat.Primrec ratMidCode := by
  have hc1 : Nat.Primrec (fun t : ℕ => t.unpair.1) := Nat.Primrec.left
  have hc2 : Nat.Primrec (fun t : ℕ => t.unpair.2) := Nat.Primrec.right
  have hnumP : Nat.Primrec (fun t : ℕ =>
      qNumP t.unpair.1 * qDen t.unpair.2 + qNumP t.unpair.2 * qDen t.unpair.1) :=
    primrec_add₂ (primrec_mul₂ (primrec_qNumP.comp hc1) (primrec_qDen.comp hc2))
      (primrec_mul₂ (primrec_qNumP.comp hc2) (primrec_qDen.comp hc1))
  have hnumN : Nat.Primrec (fun t : ℕ =>
      qNumN t.unpair.1 * qDen t.unpair.2 + qNumN t.unpair.2 * qDen t.unpair.1) :=
    primrec_add₂ (primrec_mul₂ (primrec_qNumN.comp hc1) (primrec_qDen.comp hc2))
      (primrec_mul₂ (primrec_qNumN.comp hc2) (primrec_qDen.comp hc1))
  have hden : Nat.Primrec (fun t : ℕ => 2 * qDen t.unpair.1 * qDen t.unpair.2 - 1) :=
    primrec_sub₂
      (primrec_mul₂ (primrec_mul₂ (Nat.Primrec.const 2) (primrec_qDen.comp hc1))
        (primrec_qDen.comp hc2))
      (Nat.Primrec.const 1)
  exact (Nat.Primrec.pair (Nat.Primrec.pair hnumP hnumN) hden).of_eq fun t => by
    simp only [ratMidCode]

theorem primrec_ratMinCode : Nat.Primrec ratMinCode :=
  primrec_selectFn primrec_ratLeCode Nat.Primrec.left Nat.Primrec.right

theorem qDen_pos (c : ℕ) : 0 < qDen c := Nat.succ_pos _

theorem qDen_ratMidCode (c1 c2 : ℕ) : qDen (ratMidCode (Nat.pair c1 c2)) = qDen c1 *
```

```
    qDen c2 * 2 := by
  have h1 : 1 ≤ 2 * qDen c1 * qDen c2 := by
    have hd1 := qDen_pos c1
    have hd2 := qDen_pos c2
    have : 0 < 2 * qDen c1 * qDen c2 :=
      Nat.mul_pos (Nat.mul_pos (by norm_num) hd1) hd2
    omega
  show (ratMidCode (Nat.pair c1 c2)).unpair.2 + 1 = qDen c1 * qDen c2 * 2
  simp only [ratMidCode, unpair_pair_fst, unpair_pair_snd]
  rw [Nat.sub_add_cancel h1]; ring

theorem decodeRat_ratMidCode (c1 c2 : ℕ) :
    decodeRat (ratMidCode (Nat.pair c1 c2)) = (decodeRat c1 + decodeRat c2) / 2 := by
  have hqnp : qNumP (ratMidCode (Nat.pair c1 c2)) =
      qNumP c1 * qDen c2 + qNumP c2 * qDen c1 := by
    show (ratMidCode (Nat.pair c1 c2)).unpair.1.unpair.1 = _
    simp only [ratMidCode, unpair_pair_fst, unpair_pair_snd]
  have hqnn : qNumN (ratMidCode (Nat.pair c1 c2)) =
      qNumN c1 * qDen c2 + qNumN c2 * qDen c1 := by
    show (ratMidCode (Nat.pair c1 c2)).unpair.1.unpair.2 = _
    simp only [ratMidCode, unpair_pair_fst, unpair_pair_snd]
  rw [decodeRat_eq, hqnp, hqnn, qDen_ratMidCode, Rat.mkRat_eq_div,
    decodeRat_eq c1, decodeRat_eq c2, Rat.mkRat_eq_div, Rat.mkRat_eq_div]
  have hd1 : (qDen c1 : ?) = 0 := by exact_mod_cast (qDen_pos c1).ne'
  have hd2 : (qDen c2 : ?) = 0 := by exact_mod_cast (qDen_pos c2).ne'
  push_cast
  field_simp
  ring

theorem decodeRat_ratMidCode' (e : ℕ) :
    decodeRat (ratMidCode e) = (decodeRat e.unpair.1 + decodeRat e.unpair.2) / 2 := by
  have h := decodeRat_ratMidCode e.unpair.1 e.unpair.2
  rwa [Nat.pair_unpair] at h

theorem ratLeCode_eq_one_iff (c1 c2 : ℕ) :
    ratLeCode (Nat.pair c1 c2) = 1 ↔ decodeRat c1 ≤ decodeRat c2 := by
  unfold ratLeCode
  rw [unpair_pair_fst, unpair_pair_snd, isZero_eq_one_iff, Nat.sub_eq_zero_iff_le]
  rw [decodeRat_eq c1, decodeRat_eq c2, Rat.mkRat_eq_div, Rat.mkRat_eq_div,
    div_le_div_iff₀ (by exact_mod_cast qDen_pos c1) (by exact_mod_cast qDen_pos c2),
    ← Nat.cast_le (α := ?)]
  push_cast
  constructor <;> intro h <;> nlinarith [h]

theorem ratLeCode_le_one (t : ℕ) : ratLeCode t ≤ 1 := isZero_le_one _

theorem decodeRat_ratMaxCode (c1 c2 : ℕ) :
    decodeRat (ratMaxCode (Nat.pair c1 c2)) = max (decodeRat c1) (decodeRat c2) := by
  unfold ratMaxCode
  rw [unpair_pair_fst, unpair_pair_snd]
  by_cases h : decodeRat c1 ≤ decodeRat c2
  · rw [(ratLeCode_eq_one_iff c1 c2).mpr h, selectFn_one, max_eq_right h]
  · have hf : ratLeCode (Nat.pair c1 c2) = 1 := fun he => h ((ratLeCode_eq_one_iff c1
    c2).mp he)
    have hf0 : ratLeCode (Nat.pair c1 c2) = 0 := by
      have := ratLeCode_le_one (Nat.pair c1 c2); omega
```

```
    rw [hf0, selectFn_zero, max_eq_left ((not_le.mp h).le)]

theorem decodeRat_ratMinCode (c1 c2 : ℕ) :
    decodeRat (ratMinCode (Nat.pair c1 c2)) = min (decodeRat c1) (decodeRat c2) := by
  unfold ratMinCode
  rw [unpair_pair_fst, unpair_pair_snd]
  by_cases h : decodeRat c1 ≤ decodeRat c2
  · rw [(ratLeCode_eq_one_iff c1 c2).mpr h, selectFn_one, min_eq_left h]
  · have hf : ratLeCode (Nat.pair c1 c2) = 1 := fun he => h ((ratLeCode_eq_one_iff c1
    c2).mp he)
    have hf0 : ratLeCode (Nat.pair c1 c2) = 0 := by
      have := ratLeCode_le_one (Nat.pair c1 c2); omega
    rw [hf0, selectFn_zero, min_eq_right ((not_le.mp h).le)]

theorem ratLtCode_eq_one_iff (c1 c2 : ℕ) :
    ratLtCode (Nat.pair c1 c2) = 1 ↔ decodeRat c1 < decodeRat c2 := by
  unfold ratLtCode
  rw [unpair_pair_fst, unpair_pair_snd]
  have h1 := ratLeCode_le_one (Nat.pair c2 c1)
  rw [show (1 : ℕ) - ratLeCode (Nat.pair c2 c1) = 1 ↔ ratLeCode (Nat.pair c2 c1) = 0
    from by omega,
    show ratLeCode (Nat.pair c2 c1) = 0 ↔ ¬ ratLeCode (Nat.pair c2 c1) = 1 from by
    omega,
    ratLeCode_eq_one_iff, not_le]

theorem ratLtCode_le_one (t : ℕ) : ratLtCode t ≤ 1 := by unfold ratLtCode; omega

theorem ratLtCode_recDecidable₂ : RecDecidable₂ (fun c1 c2 => decodeRat c1 < decodeRat
    c2) := by
  refine RecDecidable₂.of_paired_zero_one_char primrec_ratLtCode
    (fun t => by have := ratLtCode_le_one t; omega) (fun n m => ?_)
  exact (ratLtCode_eq_one_iff n m).symm

end DomainTheory.NeighbourhoodSystems
```

prodComb.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_9

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap Exercise326

noncomputable def prodComb (a b : ApproximableMap U U) : ApproximableMap U U :=
  iTimes.comp ((paired (a.comp (proj₀ U U)) (b.comp (proj₁ U U))).comp jTimes)

namespace prodComb

theorem eq (a b : ApproximableMap U U) :
    prodComb a b = iTimes.comp ((prodMap a b).comp jTimes) := rfl
```

```
theorem toElementMap (a b : ApproximableMap U U) (x : U.Element) :
    (prodComb a b).toElementMap x =
      iTimes.toElementMap (pair (a.toElementMap (jTimes.toElementMap x).fst)
        (b.toElementMap (jTimes.toElementMap x).snd)) := by
  rw [eq]
  simp only [toElementMap_comp, toElementMap_prodMap]

theorem isRetraction {a b : ApproximableMap U U} (ha : Retraction a)
    (hb : Retraction b) : Retraction (prodComb a b) := by
  constructor
  apply ext_of_toElementMap
  intro x
  rw [toElementMap_comp, toElementMap a b ((prodComb a b).toElementMap x),
    toElementMap a b x, toElementMap_of_comp_eq_idMap jTimes_comp_iTimes, fst_pair,
    snd_pair, toElementMap_idem_of_isRetraction ha, toElementMap_idem_of_isRetraction
    hb]

theorem le_idMap {a b : ApproximableMap U U} (ha : a ≤ idMap U) (hb : b ≤ idMap U) :
    prodComb a b ≤ idMap U := by
  rw [le_iff_toElementMap_le]
  intro x
  rw [toElementMap, toElementMap_idMap]
  have hpair : pair (a.toElementMap (jTimes.toElementMap x).fst)
      (b.toElementMap (jTimes.toElementMap x).snd)
      ≤ pair (jTimes.toElementMap x).fst (jTimes.toElementMap x).snd :=
    pair_le_pair_iff.mpr
      ⟨toElementMap_le_self_of_le_idMap ha _, toElementMap_le_self_of_le_idMap hb _⟩
  rw [pair_fst_snd] at hpair
  calc iTimes.toElementMap (pair (a.toElementMap (jTimes.toElementMap x).fst)
        (b.toElementMap (jTimes.toElementMap x).snd))
      ≤ iTimes.toElementMap (jTimes.toElementMap x) := iTimes.toElementMap_mono hpair
    _ ≤ x := toElementMap_le_of_comp_le_idMap iTimes_comp_jTimes_le x

theorem isProjection {a b : ApproximableMap U U}
    (ha : IsProjection a) (hb : IsProjection b) : IsProjection (prodComb a b) :=
  ⟨isRetraction ha.1 hb.1, le_idMap ha.2 hb.2⟩

noncomputable def I (a b : ApproximableMap U U) :
    ApproximableMap (prod (fixedNbhd a) (fixedNbhd b)) U :=
  iTimes.comp (prodMap (fixedNbhd_subsystem a).inj (fixedNbhd_subsystem b).inj)

noncomputable def J (a b : ApproximableMap U U) :
    ApproximableMap U (prod (fixedNbhd a) (fixedNbhd b)) :=
  (prodMap (fixedNbhd_subsystem a).proj (fixedNbhd_subsystem b).proj).comp jTimes

theorem J_comp_I (a b : ApproximableMap U U) :
    (J a b).comp (I a b) = idMap (prod (fixedNbhd a) (fixedNbhd b)) := by
  unfold J I
  rw [comp_assoc, ← comp_assoc jTimes iTimes (prodMap _ _), jTimes_comp_iTimes,
    idMap_comp,
    ← prodMap_comp, (fixedNbhd_subsystem a).proj_comp_inj, (fixedNbhd_subsystem b).
    proj_comp_inj,
    prodMap_id]

end prodComb
```

```
end DomainTheory.NeighbourhoodSystems
```

QPairCodes.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.ratCodes
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    RecursiveCross
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.U
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_29
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    ExampleC_le_B
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_12

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open Domain.Recursive

def decodeRatPair (c : ℕ) : ? × ? := (decodeRat c.unpair.1, decodeRat c.unpair.2)

def encodeRatPair (p : ? × ?) : ℕ := Nat.pair (encodeRat p.1) (encodeRat p.2)

@[simp] theorem decodeRatPair_encodeRatPair (p : ? × ?) : decodeRatPair (encodeRatPair
     p) = p := by
  unfold decodeRatPair encodeRatPair
  simp only [unpair_pair_fst, unpair_pair_snd, decodeRat_encodeRat]

def decodeQPairList (c : ℕ) : List (? × ?) := (decodeList c).map decodeRatPair

def encodeQPairList (L : List (? × ?)) : ℕ := encodeList (L.map encodeRatPair)

@[simp] theorem decodeQPairList_encodeQPairList (L : List (? × ?)) :
    decodeQPairList (encodeQPairList L) = L := by
  unfold decodeQPairList encodeQPairList
  rw [decodeList_encodeList, List.map_map]
  simp only [Function.comp_def, decodeRatPair_encodeRatPair, List.map_id_fun', id]

def diffOneCode (t : ℕ) : ℕ :=
  Nat.pair
    (Nat.pair t.unpair.2.unpair.1 (ratMinCode (Nat.pair t.unpair.2.unpair.2 t.unpair
    .1.unpair.1)))
    (Nat.pair (Nat.pair (ratMaxCode (Nat.pair t.unpair.2.unpair.1 t.unpair.1.unpair.2)
    )
      t.unpair.2.unpair.2) 0 + 1) + 1

def diffSingleCode (accL q : ℕ) : ℕ := flatMapCode diffOneCode q accL

def diffAllStep (w : ℕ) : ℕ := diffSingleCode w.unpair.2.unpair.1 w.unpair.1

def diffAllCode (pc L2 : ℕ) : ℕ := foldCode diffAllStep 0 (Nat.pair pc 0 + 1) L2
```

```
def diffCode (c1 c2 : ℕ) : ℕ := flatMapCode (fun t => diffAllCode t.unpair.2 t.unpair
    .1) c2 c1

def qpCombineBop (t : ℕ) : ℕ :=
  Nat.pair (ratMaxCode (Nat.pair t.unpair.1.unpair.1 t.unpair.2.unpair.1))
    (ratMinCode (Nat.pair t.unpair.1.unpair.2 t.unpair.2.unpair.2))

def combineCode (c1 c2 : ℕ) : ℕ := crossCombine qpCombineBop c1 c2

def qpNonemptyBop (e : ℕ) : ℕ := ratLtCode (Nat.pair e.unpair.1 e.unpair.2)

def qpNonemptyChar (c : ℕ) : ℕ := existsListChar (fun t => qpNonemptyBop t.unpair.1) 0
     c

theorem decodeQPairList_diffOneCode (qc pc : ℕ) :
    decodeQPairList (diffOneCode (Nat.pair qc pc)) = diffOneList (decodeRatPair pc) (
    decodeRatPair qc) := by
  unfold diffOneCode decodeQPairList diffOneList decodeRatPair
  simp only [unpair_pair_fst, unpair_pair_snd, decodeList_succ, decodeList_zero, List.
    map_cons,
    List.map_nil]
  rw [decodeRat_ratMinCode, decodeRat_ratMaxCode]

theorem mem_decodeQPairList_flatMapCode (f : ℕ → ℕ) (x c : ℕ) (p : ? × ?) :
    p ∈ decodeQPairList (flatMapCode f x c) ↔ ∃ y ∈ decodeList c, p ∈ decodeQPairList
     (f (Nat.pair x y)) := by
  unfold decodeQPairList
  rw [List.mem_map]
  constructor
  · rintro ⟨z, hz, rfl⟩
    rw [mem_decodeList_flatMapCode] at hz
    obtain ⟨y, hy, hz'⟩ := hz
    exact ⟨y, hy, List.mem_map_of_mem hz'⟩
  · rintro ⟨y, hy, hp⟩
    obtain ⟨e, he, rfl⟩ := List.mem_map.mp hp
    exact ⟨e, (mem_decodeList_flatMapCode (f := f) x c e).mpr ⟨y, hy, he⟩, rfl⟩

theorem mem_decodeQPairList_diffSingleCode (accL q : ℕ) (p : ? × ?) :
    p ∈ decodeQPairList (diffSingleCode accL q) ↔ p ∈ diffSingleList (decodeQPairList
     accL) (decodeRatPair q) := by
  unfold diffSingleCode
  rw [mem_decodeQPairList_flatMapCode]
  simp only [decodeQPairList_diffOneCode]
  unfold diffSingleList decodeQPairList
  simp only [List.mem_flatMap, List.mem_map]
  constructor
  · rintro ⟨y, hy, hp⟩; exact ⟨decodeRatPair y, ⟨y, hy, rfl⟩, hp⟩
  · rintro ⟨p', ⟨y, hy, rfl⟩, hp⟩; exact ⟨y, hy, hp⟩

theorem presentedIntervals_decodeQPairList_diffSingleCode (accL q : ℕ) :
    presentedIntervals (decodeQPairList (diffSingleCode accL q))
      = presentedIntervals (decodeQPairList accL) \ Set.Ico (decodeRatPair q).1 (
    decodeRatPair q).2 := by
  rw [presentedIntervals.congr (mem_decodeQPairList_diffSingleCode accL q),
    presentedIntervals.diffSingleList]
```

```
theorem diffAllStep_eq (acc x : ℕ) : diffAllStep (Nat.pair x (Nat.pair acc 0)) =
    diffSingleCode acc x := by
  unfold diffAllStep; simp only [unpair_pair_fst, unpair_pair_snd]

theorem presentedIntervals_decodeQPairList_foldl_diffAllStep (L2list : List ℕ) :
    ∀ acc : ℕ, presentedIntervals (decodeQPairList
        (List.foldl (fun acc x => diffAllStep (Nat.pair x (Nat.pair acc 0))) acc
    L2list))
      = presentedIntervals (decodeQPairList acc) \ presentedIntervals (L2list.map
    decodeRatPair) := by
  induction L2list with
  | nil => intro acc; simp
  | cons a l ih =>
    intro acc
    rw [List.foldl_cons, diffAllStep_eq, ih (diffSingleCode acc a),
      presentedIntervals_decodeQPairList_diffSingleCode, List.map_cons,
    presentedIntervals.cons,
      Set.sdiff_sdiff]

theorem presentedIntervals_decodeQPairList_diffAllCode (pc L2 : ℕ) :
    presentedIntervals (decodeQPairList (diffAllCode pc L2))
      = Set.Ico (decodeRatPair pc).1 (decodeRatPair pc).2 \ presentedIntervals (
    decodeQPairList L2) := by
  unfold diffAllCode
  rw [foldCode_eq', presentedIntervals_decodeQPairList_foldl_diffAllStep]
  unfold decodeQPairList
  simp only [decodeList_succ, unpair_pair_fst, unpair_pair_snd, decodeList_zero, List.
    map_cons,
    List.map_nil, presentedIntervals.cons, presentedIntervals.nil, Set.union_empty]

theorem mem_decodeQPairList_diffCode (c1 c2 : ℕ) (p : ? × ?) :
    p ∈ decodeQPairList (diffCode c1 c2) ↔ ∃ y ∈ decodeList c1, p ∈ decodeQPairList (
    diffAllCode y c2) := by
  unfold diffCode
  rw [mem_decodeQPairList_flatMapCode]
  refine exists_congr fun y => and_congr_right fun _ => ?_
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem presentedIntervals_decodeQPairList_flatMap_diffAllCode (c1list : List ℕ) (c2 :
     ℕ) :
    presentedIntervals (c1list.flatMap (fun y => decodeQPairList (diffAllCode y c2)))
      = presentedIntervals (c1list.map decodeRatPair) \ presentedIntervals (
    decodeQPairList c2) := by
  induction c1list with
  | nil => simp
  | cons a l ih =>
    rw [List.flatMap_cons, List.map_cons, presentedIntervals.append,
      presentedIntervals_decodeQPairList_diffAllCode, ih, presentedIntervals.cons,
      Set.union_sdiff_distrib]

theorem presentedIntervals_decodeQPairList_diffCode (c1 c2 : ℕ) :
    presentedIntervals (decodeQPairList (diffCode c1 c2))
      = presentedIntervals (decodeQPairList c1) \ presentedIntervals (decodeQPairList
    c2) := by
  rw [presentedIntervals.congr
```

```
      (fun p => (mem_decodeQPairList_diffCode c1 c2 p).trans (List.mem_flatMap).symm),
    presentedIntervals_decodeQPairList_flatMap_diffAllCode]
  rfl

theorem presentedIntervals_nonempty_iff (L : List (ℚ × ℚ)) :
    (presentedIntervals L).Nonempty ↔ ∃ p ∈ L, p.1 < p.2 := by
  constructor
  · rintro ⟨x, hx⟩
    obtain ⟨p, hp, hx1, hx2⟩ := presentedIntervals.mem.mp hx
    exact ⟨p, hp, lt_of_le_of_lt hx1 hx2⟩
  · rintro ⟨p, hp, hlt⟩
    exact ⟨p.1, presentedIntervals.mem.mpr ⟨p, hp, le_refl _, hlt⟩⟩

theorem decodeRatPair_qpCombineBop (e1 e2 : ℕ) :
    decodeRatPair (qpCombineBop (Nat.pair e1 e2))
      = ((decodeRatPair e1).1 ⊔ (decodeRatPair e2).1, (decodeRatPair e1).2 ⊓ (
    decodeRatPair e2).2) := by
  unfold qpCombineBop decodeRatPair
  simp only [unpair_pair_fst, unpair_pair_snd]
  rw [decodeRat_ratMaxCode, decodeRat_ratMinCode]

theorem mem_combineIntervals {L1 L2 : List (ℚ × ℚ)} {p : ℚ × ℚ} :
    p ∈ combineIntervals L1 L2 ↔ ∃ p1 ∈ L1, ∃ p2 ∈ L2, p = (p1.1 ⊔ p2.1, p1.2 ⊓ p2.2)
     := by
  unfold combineIntervals
  rw [List.mem_flatMap]
  simp only [List.mem_map, eq_comm]

theorem mem_decodeQPairList (c : ℕ) (p : ℚ × ℚ) :
    p ∈ decodeQPairList c ↔ ∃ e ∈ decodeList c, p = decodeRatPair e := by
  unfold decodeQPairList; rw [List.mem_map]; simp [eq_comm]

theorem mem_decodeQPairList_combineCode (c1 c2 : ℕ) (p : ℚ × ℚ) :
    p ∈ decodeQPairList (combineCode c1 c2) ↔
      ∃ p1 ∈ decodeQPairList c1, ∃ p2 ∈ decodeQPairList c2, p = (p1.1 ⊔ p2.1, p1.2 ⊓
    p2.2) := by
  unfold decodeQPairList combineCode
  rw [List.mem_map]
  constructor
  · rintro ⟨z, hz, hpz⟩
    rw [mem_decodeList_crossCombine] at hz
    obtain ⟨e1, he1, e2, he2, hze⟩ := hz
    refine ⟨decodeRatPair e1, List.mem_map_of_mem he1, decodeRatPair e2, List.
    mem_map_of_mem he2, ?_⟩
    rw [← hpz, hze, decodeRatPair_qpCombineBop]
  · rintro ⟨p1, hp1, p2, hp2, hp⟩
    obtain ⟨e1, he1, he1'⟩ := List.mem_map.mp hp1
    obtain ⟨e2, he2, he2'⟩ := List.mem_map.mp hp2
    refine ⟨qpCombineBop (Nat.pair e1 e2),
      (mem_decodeList_crossCombine (bop := qpCombineBop) c1 c2 _).mpr ⟨e1, he1, e2, he2
    , rfl⟩, ?_⟩
    rw [decodeRatPair_qpCombineBop, he1', he2', hp]

theorem presentedIntervals_decodeQPairList_combineCode (c1 c2 : ℕ) :
    presentedIntervals (decodeQPairList (combineCode c1 c2))
      = presentedIntervals (decodeQPairList c1) ∩ presentedIntervals (decodeQPairList
```

```
    c2) := by
  rw [presentedIntervals.inter]
  apply presentedIntervals.congr
  intro p
  rw [mem_decodeQPairList_combineCode, mem_combineIntervals]

theorem presentedIntervals_decodeQPairList_subset_iff (c1 c2 : ℕ) :
    presentedIntervals (decodeQPairList c1) ⊆ presentedIntervals (decodeQPairList c2)
    ↔
      ¬ (presentedIntervals (decodeQPairList (diffCode c1 c2))).Nonempty := by
  rw [presentedIntervals_decodeQPairList_diffCode, Set.not_nonempty_iff_eq_empty, Set.
    sdiff_eq_empty]

theorem primrec_diffOneCode : Nat.Primrec diffOneCode := by
  have ha : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.right
  have hb : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.2) := Nat.Primrec.right.comp
    Nat.Primrec.right
  have hc : Nat.Primrec (fun t : ℕ => t.unpair.1.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.left
  have hd : Nat.Primrec (fun t : ℕ => t.unpair.1.unpair.2) := Nat.Primrec.right.comp
    Nat.Primrec.left
  have hleft : Nat.Primrec (fun t : ℕ =>
      Nat.pair t.unpair.2.unpair.1 (ratMinCode (Nat.pair t.unpair.2.unpair.2 t.unpair
    .1.unpair.1))) :=
    ha.pair (primrec_ratMinCode.comp (hb.pair hc))
  have hright : Nat.Primrec (fun t : ℕ =>
      Nat.pair (ratMaxCode (Nat.pair t.unpair.2.unpair.1 t.unpair.1.unpair.2)) t.
    unpair.2.unpair.2) :=
    (primrec_ratMaxCode.comp (ha.pair hd)).pair hb
  exact (Nat.Primrec.succ.comp (hleft.pair
    (Nat.Primrec.succ.comp (hright.pair (Nat.Primrec.const 0))))).of_eq fun _ => rfl

theorem primrec_diffSingleCode : Nat.Primrec (fun t : ℕ => diffSingleCode t.unpair.1 t
    .unpair.2) := by
  unfold diffSingleCode
  exact ((primrec_flatMapCode primrec_diffOneCode).comp (Nat.Primrec.right.pair Nat.
    Primrec.left)).of_eq
    fun t => by simp only [unpair_pair_fst, unpair_pair_snd]

theorem primrec_diffAllStep : Nat.Primrec diffAllStep := by
  unfold diffAllStep
  have hacc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.right
  have hq : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  exact (primrec_diffSingleCode.comp (hacc.pair hq)).of_eq fun w => by
    simp only [unpair_pair_fst, unpair_pair_snd]

theorem primrec_diffAllCode : Nat.Primrec (fun t : ℕ => diffAllCode t.unpair.1 t.
    unpair.2) :=
  (primrec_foldCode primrec_diffAllStep (Nat.Primrec.const 0)
    (Nat.Primrec.succ.comp (Nat.Primrec.left.pair (Nat.Primrec.const 0)))
    Nat.Primrec.right).of_eq fun _ => rfl

theorem primrec_diffCode : Nat.Primrec (fun t : ℕ => diffCode t.unpair.1 t.unpair.2)
    := by
```

```
  unfold diffCode
  have hf : Nat.Primrec (fun t : ℕ => diffAllCode t.unpair.2 t.unpair.1) :=
    (primrec_diffAllCode.comp (Nat.Primrec.right.pair Nat.Primrec.left)).of_eq fun t
    => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  exact ((primrec_flatMapCode hf).comp (Nat.Primrec.right.pair Nat.Primrec.left)).
    of_eq fun t => by
    simp only [unpair_pair_fst, unpair_pair_snd]

theorem primrec_qpCombineBop : Nat.Primrec qpCombineBop := by
  have h11 : Nat.Primrec (fun t : ℕ => t.unpair.1.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.left
  have h12 : Nat.Primrec (fun t : ℕ => t.unpair.1.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.left
  have h21 : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have h22 : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  exact ((primrec_ratMaxCode.comp (h11.pair h21)).pair
    (primrec_ratMinCode.comp (h12.pair h22))).of_eq fun _ => rfl

theorem primrec_combineCode : Nat.Primrec (fun t => combineCode t.unpair.1 t.unpair.2)
    :=
  primrec_crossCombine primrec_qpCombineBop

theorem primrec_qpNonemptyBop : Nat.Primrec qpNonemptyBop :=
  primrec_ratLtCode.comp (Nat.Primrec.left.pair Nat.Primrec.right)

theorem primrec_qpNonemptyChar : Nat.Primrec qpNonemptyChar := by
  have hg : Nat.Primrec (fun t : ℕ => qpNonemptyBop t.unpair.1) :=
    primrec_qpNonemptyBop.comp Nat.Primrec.left
  exact ((primrec_existsListChar hg).comp (primrec_id.pair (Nat.Primrec.const 0))).
    of_eq
    fun c => by
      unfold qpNonemptyChar
      simp only [id, unpair_pair_fst, unpair_pair_snd]

theorem qpNonemptyBop_eq_one_iff (e : ℕ) :
    qpNonemptyBop e = 1 ↔ (decodeRatPair e).1 < (decodeRatPair e).2 := by
  unfold qpNonemptyBop decodeRatPair; exact ratLtCode_eq_one_iff e.unpair.1 e.unpair.2

theorem qpNonemptyChar_eq_one_iff (c : ℕ) :
    qpNonemptyChar c = 1 ↔ ∃ e ∈ decodeList c, (decodeRatPair e).1 < (decodeRatPair e)
    .2 := by
  unfold qpNonemptyChar
  rw [existsListChar_eq_one_iff]
  refine exists_congr fun e => and_congr_right fun _ => ?_
  rw [unpair_pair_fst, qpNonemptyBop_eq_one_iff]

theorem presentedIntervals_decodeQPairList_nonempty_iff (c : ℕ) :
    (presentedIntervals (decodeQPairList c)).Nonempty ↔ qpNonemptyChar c = 1 := by
  rw [presentedIntervals_nonempty_iff, qpNonemptyChar_eq_one_iff]
  constructor
  · rintro ⟨p, hp, hlt⟩
    obtain ⟨e, he, rfl⟩ := (mem_decodeQPairList c p).mp hp
    exact ⟨e, he, hlt⟩
```

```
  · rintro ⟨e, he, hlt⟩
    exact ⟨decodeRatPair e, (mem_decodeQPairList c (decodeRatPair e)).mpr ⟨e, he, rfl⟩,
     hlt⟩

theorem qpNonemptyChar_le_one (c : ℕ) : qpNonemptyChar c ≤ 1 := existsListChar_le_one
    _ 0 c

theorem recDecidable_presentedIntervals_nonempty :
    RecDecidable (fun c => (presentedIntervals (decodeQPairList c)).Nonempty) :=
  RecDecidable.of_zero_one_char primrec_qpNonemptyChar
    (fun c => by have := qpNonemptyChar_le_one c; omega)
    presentedIntervals_decodeQPairList_nonempty_iff

theorem recDecidable₂_presentedIntervals_subset :
    RecDecidable₂ (fun c1 c2 =>
      presentedIntervals (decodeQPairList c1) ⊆ presentedIntervals (decodeQPairList c2
    )) := by
  unfold RecDecidable₂
  refine RecDecidable.of_iff (fun t => ?_)
    (recDecidable_presentedIntervals_nonempty.comp primrec_diffCode).not
  exact presentedIntervals_decodeQPairList_subset_iff t.unpair.1 t.unpair.2

theorem recDecidable₂_presentedIntervals_eq :
    RecDecidable₂ (fun c1 c2 =>
      presentedIntervals (decodeQPairList c1) = presentedIntervals (decodeQPairList c2
    )) := by
  unfold RecDecidable₂
  refine RecDecidable.of_iff (fun t => ?_)
    (recDecidable₂_presentedIntervals_subset.and recDecidable₂
    _presentedIntervals_subset.swap)
  exact Set.Subset.antisymm_iff

theorem mem_decodeQPairList_appendCode (c1 c2 : ℕ) (p : ? × ?) :
    p ∈ decodeQPairList (Domain.Recursive.appendCode c1 c2) ↔ p ∈ decodeQPairList c1
    ∨ p ∈ decodeQPairList c2 := by
  simp only [mem_decodeQPairList, mem_decodeList_appendCode]
  constructor
  · rintro ⟨v, (hv | hv), rfl⟩
    · exact Or.inl ⟨v, hv, rfl⟩
    · exact Or.inr ⟨v, hv, rfl⟩
  · rintro (⟨v, hv, rfl⟩ | ⟨v, hv, rfl⟩)
    · exact ⟨v, Or.inl hv, rfl⟩
    · exact ⟨v, Or.inr hv, rfl⟩

theorem presentedIntervals_decodeQPairList_appendCode (c1 c2 : ℕ) :
    presentedIntervals (decodeQPairList (Domain.Recursive.appendCode c1 c2))
      = presentedIntervals (decodeQPairList c1) ∪ presentedIntervals (decodeQPairList
    c2) := by
  ext x
  simp only [presentedIntervals.mem, Set.mem_union]
  constructor
  · rintro ⟨p, hp, h1, h2⟩
    rcases (mem_decodeQPairList_appendCode c1 c2 p).mp hp with hp' | hp'
    · exact Or.inl ⟨p, hp', h1, h2⟩
    · exact Or.inr ⟨p, hp', h1, h2⟩
  · rintro (⟨p, hp, h1, h2⟩ | ⟨p, hp, h1, h2⟩)
```

```
    · exact ⟨p, (mem_decodeQPairList_appendCode c1 c2 p).mpr (Or.inl hp), h1, h2⟩
    · exact ⟨p, (mem_decodeQPairList_appendCode c1 c2 p).mpr (Or.inr hp), h1, h2⟩

end DomainTheory.NeighbourhoodSystems
```

UX.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    QPairCodes
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    presentedIntervals
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.U
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open Domain.Recursive NeighborhoodSystem

def masterPairCode : ℕ := Nat.pair zeroCode oneCode

@[simp] theorem decodeRatPair_masterPairCode : decodeRatPair masterPairCode = ((0 : ?)
    , (1 : ?)) := by
  unfold masterPairCode decodeRatPair
  simp only [unpair_pair_fst, unpair_pair_snd, decodeRat_zeroCode, decodeRat_oneCode]

def UmasterIdx : ℕ := encodeQPairList [((0 : ?), (1 : ?))]

theorem decodeQPairList_masterCode :
    decodeQPairList (Nat.pair masterPairCode 0 + 1) = [((0 : ?), (1 : ?))] := by
  unfold decodeQPairList
  rw [decodeList_succ, unpair_pair_fst, unpair_pair_snd, decodeList_zero]
  simp [decodeRatPair_masterPairCode]

theorem presentedIntervals_eq_empty_iff_of_forall_lt {L' : List (? × ?)}
    (hpos : ∀ p ∈ L', p.1 < p.2) : presentedIntervals L' = ∅ ↔ L' = [] := by
  constructor
  · intro h
    rcases L' with _ | ⟨a, l⟩
    · rfl
    · exact absurd h (Set.Nonempty.ne_empty ⟨a.1, presentedIntervals.mem.mpr
        ⟨a, List.mem_cons.mpr (Or.inl rfl), le_refl _,
          hpos a (List.mem_cons.mpr (Or.inl rfl))⟩⟩)
  · rintro rfl; exact presentedIntervals.nil

theorem presentedIntervals_filter_qpPos (L : List (? × ?)) :
    presentedIntervals (L.filter (fun p => decide (p.1 < p.2))) = presentedIntervals L
     := by
  ext x
  simp only [presentedIntervals.mem, List.mem_filter, decide_eq_true_eq]
  constructor
  · rintro ⟨p, ⟨hp, -⟩, hx⟩
```

```
    exact ⟨p, hp, hx⟩
  · rintro ⟨p, hp, hx1, hx2⟩
    exact ⟨p, ⟨hp, lt_of_le_of_lt hx1 hx2⟩, hx1, hx2⟩

theorem presentedIntervals_singleton_zero_one :
    presentedIntervals ([((0 : ?), (1 : ?))]) = U.master := by
  rw [presentedIntervals.cons, presentedIntervals.nil, Set.union_empty]; rfl

def qpClip (p : ? × ?) : ? × ? := (p.1 ⊔ 0, p.2 ⊓ 1)

def canonList (L : List (? × ?)) : List (? × ?) :=
  match (L.map qpClip).filter (fun p => decide (p.1 < p.2)) with
  | [] => [((0 : ?), (1 : ?))]
  | L' => L'

theorem canonList_eq_of_filter_eq_cons {L : List (? × ?)} {a : ? × ?} {l : List (? ×
    ?)}
    (h : (L.map qpClip).filter (fun p => decide (p.1 < p.2)) = a :: l) :
    canonList L = a :: l := by
  unfold canonList; rw [h]

theorem canonList_eq_of_filter_eq_nil {L : List (? × ?)}
    (h : (L.map qpClip).filter (fun p => decide (p.1 < p.2)) = []) :
    canonList L = [((0 : ?), (1 : ?))] := by
  unfold canonList; rw [h]

theorem presentedIntervals_map_qpClip (L : List (? × ?)) :
    presentedIntervals (L.map qpClip) = presentedIntervals L ∩ Set.Ico (0 : ?) 1 := by
  ext x
  simp only [presentedIntervals.mem, List.mem_map, Set.mem_inter_iff, Set.mem_Ico,
    qpClip]
  constructor
  · rintro ⟨p, ⟨q, hq, rfl⟩, hx1, hx2⟩
    exact ⟨⟨q, hq, le_sup_left.trans hx1, hx2.trans_le inf_le_left⟩,
      le_sup_right.trans hx1, hx2.trans_le inf_le_right⟩
  · rintro ⟨⟨q, hq, hxq1, hxq2⟩, hx0, hx1⟩
    exact ⟨(q.1 ⊔ 0, q.2 ⊓ 1), ⟨q, hq, rfl⟩, sup_le hxq1 hx0, lt_inf_iff.mpr ⟨hxq2, hx1⟩
    ⟩

theorem U_presentedIntervals.mem_canonList (L : List (? × ?)) :
    U.mem (presentedIntervals (canonList L)) := by
  rcases hL : (L.map qpClip).filter (fun p => decide (p.1 < p.2)) with _ | ⟨a, l⟩
  · rw [canonList_eq_of_filter_eq_nil hL]
    have heq : presentedIntervals ([((0 : ?), (1 : ?))]) = U.master := by
      rw [presentedIntervals.cons, presentedIntervals.nil, Set.union_empty]; rfl
    rw [heq]; exact U.master_mem
  · rw [canonList_eq_of_filter_eq_cons hL]
    have hL'eq : presentedIntervals (a :: l) = presentedIntervals L ∩ Set.Ico (0 : ?)
    1 := by
      rw [← hL, presentedIntervals_filter_qpPos, presentedIntervals_map_qpClip]
    have hmem : a ∈ (L.map qpClip).filter (fun p => decide (p.1 < p.2)) := by
      rw [hL]; exact List.mem_cons.mpr (Or.inl rfl)
    have ha : a.1 < a.2 := by simpa using (List.mem_filter.mp hmem).2
    refine ⟨⟨a :: l, rfl⟩, ?_, hL'eq ▸ Set.inter_subset_right⟩
    exact ⟨a.1, presentedIntervals.mem.mpr ⟨a, List.mem_cons.mpr (Or.inl rfl), le_refl
    _, ha⟩⟩
```

```
theorem canonList_fixed {L : List (? × ?)} (h : U.mem (presentedIntervals L)) :
    presentedIntervals (canonList L) = presentedIntervals L := by
  obtain ⟨-, hne, hsub⟩ := h
  rcases hL : (L.map qpClip).filter (fun p => decide (p.1 < p.2)) with _ | ⟨a, l⟩
  · exfalso
    have hcontra : presentedIntervals L ∩ Set.Ico (0 : ?) 1 = ∅ := by
      rw [← presentedIntervals_map_qpClip, ← presentedIntervals_filter_qpPos (L.map
    qpClip), hL,
        presentedIntervals.nil]
    rw [Set.inter_eq_left.mpr hsub] at hcontra
    exact hne.ne_empty hcontra
  · rw [canonList_eq_of_filter_eq_cons hL, ← hL, presentedIntervals_filter_qpPos,
      presentedIntervals_map_qpClip, Set.inter_eq_left.mpr hsub]

def qpClipCode (e : ℕ) : ℕ :=
  Nat.pair (ratMaxCode (Nat.pair e.unpair.1 zeroCode)) (ratMinCode (Nat.pair e.unpair
    .2 oneCode))

def canonFilterStep (e : ℕ) : ℕ :=
  selectFn (qpNonemptyBop (qpClipCode e)) (Nat.pair (qpClipCode e) 0 + 1) 0

def canonListCode (c : ℕ) : ℕ := flatMapCode (fun t => canonFilterStep t.unpair.2) 0 c

def canonCode (c : ℕ) : ℕ :=
  selectFn (isZero (canonListCode c)) (Nat.pair masterPairCode 0 + 1) (canonListCode c
    )

def UX (n : ℕ) : Set ? := presentedIntervals (decodeQPairList (canonCode n))

def Uinter (n m : ℕ) : ℕ := combineCode (canonCode n) (canonCode m)

theorem decodeRatPair_qpClipCode (e : ℕ) :
    decodeRatPair (qpClipCode e) = qpClip (decodeRatPair e) := by
  unfold qpClipCode qpClip decodeRatPair
  simp only [unpair_pair_fst, unpair_pair_snd]
  rw [decodeRat_ratMaxCode, decodeRat_ratMinCode, decodeRat_zeroCode,
    decodeRat_oneCode]

theorem decodeList_canonFilterStep (e : ℕ) :
    decodeList (canonFilterStep e)
      = if (qpClip (decodeRatPair e)).1 < (qpClip (decodeRatPair e)).2
        then [qpClipCode e] else [] := by
  unfold canonFilterStep
  by_cases h : qpNonemptyBop (qpClipCode e) = 1
  · rw [h, selectFn_one]
    have h' : (decodeRatPair (qpClipCode e)).1 < (decodeRatPair (qpClipCode e)).2 :=
      (qpNonemptyBop_eq_one_iff (qpClipCode e)).mp h
    rw [decodeRatPair_qpClipCode] at h'
    simp [h', decodeList_succ, decodeList_zero]
  · have h0 : qpNonemptyBop (qpClipCode e) = 0 := by
      have := ratLtCode_le_one (Nat.pair (qpClipCode e).unpair.1 (qpClipCode e).unpair
    .2)
      unfold qpNonemptyBop at h ⊢; omega
    rw [h0, selectFn_zero]
    have hnot : ¬ (decodeRatPair (qpClipCode e)).1 < (decodeRatPair (qpClipCode e)).2
```

```
    := by
      rw [← qpNonemptyBop_eq_one_iff]; omega
    rw [decodeRatPair_qpClipCode] at hnot
    simp [hnot, decodeList_zero]

theorem decodeQPairList_canonFilterStep (e : ℕ) :
    decodeQPairList (canonFilterStep e)
      = if (qpClip (decodeRatPair e)).1 < (qpClip (decodeRatPair e)).2
        then [qpClip (decodeRatPair e)] else [] := by
  unfold decodeQPairList
  rw [decodeList_canonFilterStep]
  split <;> simp [decodeRatPair_qpClipCode]

theorem mem_decodeQPairList_canonFilterStep (e : ℕ) (p : ? × ?) :
    p ∈ decodeQPairList (canonFilterStep e) ↔
      (qpClip (decodeRatPair e)).1 < (qpClip (decodeRatPair e)).2 ∧ p = qpClip (
    decodeRatPair e) := by
  rw [decodeQPairList_canonFilterStep]
  by_cases h : (qpClip (decodeRatPair e)).1 < (qpClip (decodeRatPair e)).2
  · simp [h]
  · simp [h]

theorem mem_decodeQPairList_canonListCode (c : ℕ) (p : ? × ?) :
    p ∈ decodeQPairList (canonListCode c) ↔
      ∃ p0 ∈ decodeQPairList c, (qpClip p0).1 < (qpClip p0).2 ∧ p = qpClip p0 := by
  unfold canonListCode
  rw [mem_decodeQPairList_flatMapCode]
  constructor
  · rintro ⟨y, hy, hp⟩
    rw [unpair_pair_snd, mem_decodeQPairList_canonFilterStep] at hp
    exact ⟨decodeRatPair y, (mem_decodeQPairList c (decodeRatPair y)).mpr ⟨y, hy, rfl⟩,
     hp⟩
  · rintro ⟨p0, hp0, hcond, hp⟩
    obtain ⟨y, hy, rfl⟩ := (mem_decodeQPairList c p0).mp hp0
    exact ⟨y, hy, by rw [unpair_pair_snd, mem_decodeQPairList_canonFilterStep]; exact ⟨
    hcond, hp⟩⟩

theorem decodeQPairList_canonListCode_eq_nil_iff (c : ℕ) :
    decodeQPairList (canonListCode c) = [] ↔
      presentedIntervals (decodeQPairList (canonListCode c)) = ∅ :=
  (presentedIntervals_eq_empty_iff_of_forall_lt (fun p hp => by
    obtain ⟨p0, hp0, hcond, rfl⟩ := (mem_decodeQPairList_canonListCode c p).mp hp
    exact hcond)).symm

theorem presentedIntervals_decodeQPairList_canonListCode (c : ℕ) :
    presentedIntervals (decodeQPairList (canonListCode c))
      = presentedIntervals (decodeQPairList c) ∩ Set.Ico (0 : ?) 1 := by
  rw [← presentedIntervals_map_qpClip, ← presentedIntervals_filter_qpPos ((
    decodeQPairList c).map qpClip)]
  apply presentedIntervals.congr
  intro p
  rw [mem_decodeQPairList_canonListCode, List.mem_filter, List.mem_map]
  constructor
  · rintro ⟨p0, hp0, hcond, rfl⟩
    exact ⟨⟨p0, hp0, rfl⟩, decide_eq_true_eq.mpr hcond⟩
  · rintro ⟨⟨p0, hp0, hp⟩, hcond⟩
```

```
    rw [decide_eq_true_eq] at hcond
    exact ⟨p0, hp0, hp ▸ hcond, hp.symm⟩

theorem presentedIntervals_decodeQPairList_canonCode (c : ℕ) :
    presentedIntervals (decodeQPairList (canonCode c))
      = presentedIntervals (canonList (decodeQPairList c)) := by
  have hfilterPos : ∀ p ∈ ((decodeQPairList c).map qpClip).filter (fun p => decide (p
    .1 < p.2)),
      p.1 < p.2 := fun p hp => by simpa using (List.mem_filter.mp hp).2
  by_cases hne : (presentedIntervals (decodeQPairList c) ∩ Set.Ico (0 : ?) 1).Nonempty
  · have hnc : (presentedIntervals (decodeQPairList (canonListCode c))).Nonempty := by
      rwa [presentedIntervals_decodeQPairList_canonListCode]
    have hcne : canonListCode c = 0 := by
      intro h
      apply hnc.ne_empty
      unfold decodeQPairList
      rw [h, decodeList_zero, List.map_nil]
      exact presentedIntervals.nil
    have hzero : isZero (canonListCode c) = 0 := by
      by_contra hz
      have h1 := isZero_le_one (canonListCode c)
      exact hcne ((isZero_eq_one_iff _).mp (by omega))
    have hcc : canonCode c = canonListCode c := by unfold canonCode; rw [hzero,
    selectFn_zero]
    have hL'ne : ((decodeQPairList c).map qpClip).filter (fun p => decide (p.1 < p.2))
     = [] := by
      rw [Ne, ← presentedIntervals_eq_empty_iff_of_forall_lt hfilterPos,
        presentedIntervals_filter_qpPos, presentedIntervals_map_qpClip]
      exact hne.ne_empty
    rcases hL : ((decodeQPairList c).map qpClip).filter (fun p => decide (p.1 < p.2))
    with _ | ⟨a, l⟩
    · exact absurd hL hL'ne
    · rw [hcc, presentedIntervals_decodeQPairList_canonListCode,
    canonList_eq_of_filter_eq_cons hL,
        ← hL, presentedIntervals_filter_qpPos, presentedIntervals_map_qpClip]
  · rw [Set.not_nonempty_iff_eq_empty] at hne
    have hLnil : decodeQPairList (canonListCode c) = [] := by
      rw [decodeQPairList_canonListCode_eq_nil_iff,
    presentedIntervals_decodeQPairList_canonListCode,
        hne]
    have hczero : canonListCode c = 0 := by
      have h' := hLnil
      unfold decodeQPairList at h'
      rwa [List.map_eq_nil_iff, decodeList_eq_nil_iff] at h'
    have hzero : isZero (canonListCode c) = 1 := by rw [hczero]; exact (
    isZero_eq_one_iff 0).mpr rfl
    have hcc : canonCode c = Nat.pair masterPairCode 0 + 1 := by
      unfold canonCode; rw [hzero, selectFn_one]
    have hLnil' : ((decodeQPairList c).map qpClip).filter (fun p => decide (p.1 < p.2)
    ) = [] := by
      rw [← presentedIntervals_eq_empty_iff_of_forall_lt hfilterPos,
    presentedIntervals_filter_qpPos,
        presentedIntervals_map_qpClip]
      exact hne
    rw [hcc, decodeQPairList_masterCode, canonList_eq_of_filter_eq_nil hLnil']
```

```
theorem UX_eq (n : ℕ) : UX n = presentedIntervals (canonList (decodeQPairList n)) :=
  presentedIntervals_decodeQPairList_canonCode n

theorem UX_UmasterIdx : UX UmasterIdx = U.master := by
  unfold UmasterIdx
  rw [UX_eq, decodeQPairList_encodeQPairList]
  have hmem : U.mem (presentedIntervals [((0 : ?), (1 : ?))]) := by
    rw [presentedIntervals_singleton_zero_one]; exact U.master_mem
  rw [canonList_fixed hmem, presentedIntervals_singleton_zero_one]

theorem U_mem_UX (n : ℕ) : U.mem (UX n) := by
  rw [UX_eq]; exact U_presentedIntervals.mem_canonList _

theorem U_surj_UX : ∀ {Y : Set ?}, U.mem Y → ∃ n, UX n = Y := by
  intro Y hY
  obtain ⟨L, -, hYeq, -⟩ := U.mem_iff_scott.mp hY
  have hUL : U.mem (presentedIntervals L) := by rw [← hYeq]; exact hY
  exact ⟨encodeQPairList L, by
    rw [UX_eq, decodeQPairList_encodeQPairList, canonList_fixed hUL, ← hYeq]⟩

theorem U_cons_iff_nonempty_inter (n m : ℕ) :
    (∃ k, UX k ⊆ UX n ∩ UX m) ↔ (UX n ∩ UX m).Nonempty := by
  constructor
  · rintro ⟨k, hk⟩
    exact (U_mem_UX k).2.1.mono hk
  · intro hne
    have hUmem : U.mem (UX n ∩ UX m) := by
      obtain ⟨-, -, hsubn⟩ := U_mem_UX n
      exact ⟨⟨decodeQPairList (combineCode (canonCode n) (canonCode m)),
        (presentedIntervals_decodeQPairList_combineCode (canonCode n) (canonCode m)).
   symm⟩,
       hne, Set.inter_subset_left.trans hsubn⟩
    obtain ⟨k, hk⟩ := U_surj_UX hUmem
    exact ⟨k, by rw [hk]⟩

theorem Uinter_spec {n m : ℕ} (h : ∃ k, UX k ⊆ UX n ∩ UX m) : UX (Uinter n m) = UX n ∩
    UX m := by
  have hne : (UX n ∩ UX m).Nonempty := (U_cons_iff_nonempty_inter n m).mp h
  have hUL : U.mem (presentedIntervals (decodeQPairList (combineCode (canonCode n) (
    canonCode m)))) := by
    rw [presentedIntervals_decodeQPairList_combineCode]
    obtain ⟨-, -, hsubn⟩ := U_mem_UX n
    exact ⟨⟨decodeQPairList (combineCode (canonCode n) (canonCode m)),
      (presentedIntervals_decodeQPairList_combineCode (canonCode n) (canonCode m)).
   symm⟩,
      hne, Set.inter_subset_left.trans hsubn⟩
  unfold Uinter UX
  rw [presentedIntervals_decodeQPairList_canonCode, canonList_fixed hUL,
    presentedIntervals_decodeQPairList_combineCode]

theorem primrec_qpClipCode : Nat.Primrec qpClipCode := by
  have h1 : Nat.Primrec (fun e : ℕ => e.unpair.1) := Nat.Primrec.left
  have h2 : Nat.Primrec (fun e : ℕ => e.unpair.2) := Nat.Primrec.right
  exact ((primrec_ratMaxCode.comp (h1.pair (Nat.Primrec.const zeroCode))).pair
    (primrec_ratMinCode.comp (h2.pair (Nat.Primrec.const oneCode)))).of_eq fun _ =>
    rfl
```

```
theorem primrec_canonFilterStep : Nat.Primrec canonFilterStep := by
  have hc : Nat.Primrec qpClipCode := primrec_qpClipCode
  exact (primrec_selectFn (primrec_qpNonemptyBop.comp hc)
    (Nat.Primrec.succ.comp (hc.pair (Nat.Primrec.const 0))) (Nat.Primrec.const 0)).
    of_eq
    fun _ => rfl

theorem primrec_canonListCode : Nat.Primrec canonListCode := by
  have hg : Nat.Primrec (fun t : ℕ => canonFilterStep t.unpair.2) :=
    primrec_canonFilterStep.comp Nat.Primrec.right
  exact ((primrec_flatMapCode hg).comp ((Nat.Primrec.const 0).pair primrec_id)).of_eq
    fun c => by
      unfold canonListCode
      simp only [id, unpair_pair_fst, unpair_pair_snd]

theorem primrec_canonCode : Nat.Primrec canonCode :=
  (primrec_selectFn (primrec_isZero.comp primrec_canonListCode)
    (Nat.Primrec.const (Nat.pair masterPairCode 0 + 1)) primrec_canonListCode).of_eq
    fun _ => rfl

theorem U_cons_computable : RecDecidable₂ (fun n m => ∃ k, UX k ⊆ UX n ∩ UX m) := by
  unfold RecDecidable₂
  have hcomb : Nat.Primrec (fun t : ℕ => combineCode (canonCode t.unpair.1) (canonCode
     t.unpair.2)) :=
    (primrec_combineCode.comp ((primrec_canonCode.comp Nat.Primrec.left).pair
      (primrec_canonCode.comp Nat.Primrec.right))).of_eq
      fun t => by simp only [unpair_pair_fst, unpair_pair_snd]
  refine RecDecidable.of_iff (fun t => ?_) (recDecidable_presentedIntervals_nonempty.
    comp hcomb)
  show (∃ k, UX k ⊆ UX t.unpair.1 ∩ UX t.unpair.2) ↔ _
  rw [U_cons_iff_nonempty_inter, UX, UX,
    presentedIntervals_decodeQPairList_combineCode]

theorem U_interEq_computable : RecDecidable₃ (fun n m k => UX n ∩ UX m = UX k) := by
  unfold RecDecidable₃
  have h1 : Nat.Primrec (fun t : ℕ => t.unpair.1) := Nat.Primrec.left
  have h2 : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have h3 : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hcomb : Nat.Primrec (fun t : ℕ =>
      combineCode (canonCode t.unpair.1) (canonCode t.unpair.2.unpair.1)) :=
    (primrec_combineCode.comp ((primrec_canonCode.comp h1).pair (primrec_canonCode.
    comp h2))).of_eq
      fun t => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hg : Nat.Primrec (fun t : ℕ =>
      Nat.pair (combineCode (canonCode t.unpair.1) (canonCode t.unpair.2.unpair.1))
        (canonCode t.unpair.2.unpair.2)) := hcomb.pair (primrec_canonCode.comp h3)
  refine RecDecidable.of_iff (fun t => ?_) (recDecidable₂_presentedIntervals_eq.comp hg
    )
  show UX t.unpair.1 ∩ UX t.unpair.2.unpair.1 = UX t.unpair.2.unpair.2 ↔ _
  simp only [unpair_pair_fst, unpair_pair_snd]
  rw [UX, UX, UX, presentedIntervals_decodeQPairList_combineCode]

theorem Uinter_primrec : Nat.Primrec (fun t : ℕ => Uinter t.unpair.1 t.unpair.2) := by
```

```
  unfold Uinter
  exact (primrec_combineCode.comp ((primrec_canonCode.comp Nat.Primrec.left).pair
    (primrec_canonCode.comp Nat.Primrec.right))).of_eq
    fun t => by simp only [unpair_pair_fst, unpair_pair_snd]

def UComputablePresentation : ComputablePresentation U where
  X := UX
  mem_X := U_mem_UX
  surj := U_surj_UX
  interEq_computable := U_interEq_computable
  cons_computable := U_cons_computable
  inter := Uinter
  inter_primrec := Uinter_primrec
  inter_spec := Uinter_spec
  masterIdx := UmasterIdx
  masterIdx_spec := UX_UmasterIdx

theorem U_isEffectivelyGiven : U.IsEffectivelyGiven := ⟨UComputablePresentation⟩

theorem decodeQPairList_canonCode_ne_nil (c : ℕ) : decodeQPairList (canonCode c) = []
    := by
  unfold canonCode
  by_cases hz : canonListCode c = 0
  · have hzero : isZero (canonListCode c) = 1 := by rw [hz]; exact (isZero_eq_one_iff
    0).mpr rfl
    rw [hzero, selectFn_one, decodeQPairList_masterCode]
    simp
  · have hzero : isZero (canonListCode c) = 0 := by
      by_contra hcontra
      have h1 := isZero_le_one (canonListCode c)
      exact hz ((isZero_eq_one_iff _).mp (by omega))
    rw [hzero, selectFn_zero]
    intro hcontra
    apply hz
    have h' := hcontra
    unfold decodeQPairList at h'
    rwa [List.map_eq_nil_iff, decodeList_eq_nil_iff] at h'

theorem canonCode_ne_zero (c : ℕ) : canonCode c = 0 := by
  intro h
  exact decodeQPairList_canonCode_ne_nil c (by rw [h]; unfold decodeQPairList; rw [
    decodeList_zero]; rfl)

theorem forall_lt_decodeQPairList_canonListCode (c : ℕ) :
    ∀ p ∈ decodeQPairList (canonListCode c), p.1 < p.2 := fun p hp => by
  obtain ⟨p0, -, hcond, rfl⟩ := (mem_decodeQPairList_canonListCode c p).mp hp
  exact hcond

theorem forall_lt_decodeQPairList_canonCode (c : ℕ) :
    ∀ p ∈ decodeQPairList (canonCode c), p.1 < p.2 := by
  unfold canonCode
  by_cases hz : canonListCode c = 0
  · have hzero : isZero (canonListCode c) = 1 := by rw [hz]; exact (isZero_eq_one_iff
    0).mpr rfl
    rw [hzero, selectFn_one]
    intro p hp
```

```
    rw [decodeQPairList_masterCode, List.mem_singleton] at hp
    rw [hp]; norm_num
  · have hzero : isZero (canonListCode c) = 0 := by
      by_contra hcontra

      have h1 := isZero_le_one (canonListCode c)
      exact hz ((isZero_eq_one_iff _).mp (by omega))
    rw [hzero, selectFn_zero]
    exact forall_lt_decodeQPairList_canonListCode c

theorem U_mem_union_UX (n m : ℕ) : U.mem (UX n ∪ UX m) := by
  obtain ⟨-, hne1, hsub1⟩ := U_mem_UX n
  obtain ⟨-, -, hsub2⟩ := U_mem_UX m
  exact ⟨⟨decodeQPairList (canonCode n) ++ decodeQPairList (canonCode m),
      (presentedIntervals.append _ _).symm⟩, hne1.mono Set.subset_union_left,
    Set.union_subset hsub1 hsub2⟩

end DomainTheory.NeighbourhoodSystems
```

splitU.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.UX
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    QPairCodes

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open Domain.Recursive NeighborhoodSystem

open Domain.Recursive NeighborhoodSystem

def clipGeCode (t : ℕ) : ℕ :=
  Nat.pair (ratMaxCode (Nat.pair t.unpair.2.unpair.1 t.unpair.1)) t.unpair.2.unpair.2

def clipGeListCode (m c : ℕ) : ℕ := flatMapCode (fun t => Nat.pair (clipGeCode t) 0 +
    1) m c

def clipLtCode (t : ℕ) : ℕ :=
  Nat.pair t.unpair.2.unpair.1 (ratMinCode (Nat.pair t.unpair.2.unpair.2 t.unpair.1))

def clipLtListCode (m c : ℕ) : ℕ := flatMapCode (fun t => Nat.pair (clipLtCode t) 0 +
    1) m c

def firstElemCode (c : ℕ) : ℕ := (c - 1).unpair.1

def qpClipGe (m : ?) (p : ? × ?) : ? × ? := (p.1 ⊔ m, p.2)

def qpClipLt (m : ?) (p : ? × ?) : ? × ? := (p.1, p.2 ⊓ m)

def splitMidCode (n : ℕ) : ℕ := ratMidCode (firstElemCode (canonCode n))

def splitULeft (n : ℕ) : ℕ := clipLtListCode (splitMidCode n) (canonCode n)
```

```
def splitURight (n : ℕ) : ℕ := clipGeListCode (splitMidCode n) (canonCode n)

theorem decodeQPairList_singletonCode (v : ℕ) :
    decodeQPairList (Nat.pair v 0 + 1) = [decodeRatPair v] := by
  unfold decodeQPairList
  rw [decodeList_succ, unpair_pair_fst, unpair_pair_snd, decodeList_zero]
  rfl

theorem decodeRatPair_clipGeCode (m e : ℕ) :
    decodeRatPair (clipGeCode (Nat.pair m e)) = qpClipGe (decodeRat m) (decodeRatPair
    e) := by
  unfold clipGeCode decodeRatPair qpClipGe
  simp only [unpair_pair_fst, unpair_pair_snd, decodeRat_ratMaxCode]

theorem decodeRatPair_clipLtCode (m e : ℕ) :
    decodeRatPair (clipLtCode (Nat.pair m e)) = qpClipLt (decodeRat m) (decodeRatPair
    e) := by
  unfold clipLtCode decodeRatPair qpClipLt
  simp only [unpair_pair_fst, unpair_pair_snd, decodeRat_ratMinCode]

theorem mem_decodeQPairList_clipGeListCode (m c : ℕ) (p : ? × ?) :
    p ∈ decodeQPairList (clipGeListCode m c) ↔
      ∃ p0 ∈ decodeQPairList c, p = qpClipGe (decodeRat m) p0 := by
  unfold clipGeListCode
  rw [mem_decodeQPairList_flatMapCode]
  constructor
  · rintro ⟨y, hy, hp⟩
    rw [decodeQPairList_singletonCode, List.mem_singleton, decodeRatPair_clipGeCode]
    at hp
    exact ⟨decodeRatPair y, (mem_decodeQPairList c (decodeRatPair y)).mpr ⟨y, hy, rfl⟩,
     hp⟩
  · rintro ⟨p0, hp0, hp⟩
    obtain ⟨y, hy, rfl⟩ := (mem_decodeQPairList c p0).mp hp0
    exact ⟨y, hy, by
      rw [decodeQPairList_singletonCode, List.mem_singleton, decodeRatPair_clipGeCode
    ]; exact hp⟩

theorem mem_decodeQPairList_clipLtListCode (m c : ℕ) (p : ? × ?) :
    p ∈ decodeQPairList (clipLtListCode m c) ↔
      ∃ p0 ∈ decodeQPairList c, p = qpClipLt (decodeRat m) p0 := by
  unfold clipLtListCode
  rw [mem_decodeQPairList_flatMapCode]
  constructor
  · rintro ⟨y, hy, hp⟩
    rw [decodeQPairList_singletonCode, List.mem_singleton, decodeRatPair_clipLtCode]
    at hp
    exact ⟨decodeRatPair y, (mem_decodeQPairList c (decodeRatPair y)).mpr ⟨y, hy, rfl⟩,
     hp⟩
  · rintro ⟨p0, hp0, hp⟩
    obtain ⟨y, hy, rfl⟩ := (mem_decodeQPairList c p0).mp hp0
    exact ⟨y, hy, by
      rw [decodeQPairList_singletonCode, List.mem_singleton, decodeRatPair_clipLtCode
    ]; exact hp⟩

theorem mem_decodeQPairList_firstElemCode {c : ℕ} (hc : c = 0) :
    decodeRatPair (firstElemCode c) ∈ decodeQPairList c := by
```

```
  obtain ⟨c', rfl⟩ := Nat.exists_eq_succ_of_ne_zero hc
  have : firstElemCode (c' + 1) = c'.unpair.1 := by unfold firstElemCode; simp
  unfold decodeQPairList
  rw [this, decodeList_succ]
  exact List.mem_map_of_mem (by simp)

theorem presentedIntervals_map_qpClipGe (m : ?) (L : List (? × ?)) :
    presentedIntervals (L.map (qpClipGe m)) = presentedIntervals L ∩ Set.Ici m := by
  ext x
  simp only [presentedIntervals.mem, List.mem_map, Set.mem_inter_iff, Set.mem_Ici,
    qpClipGe]
  constructor
  · rintro ⟨p, ⟨q, hq, rfl⟩, hx1, hx2⟩
    exact ⟨⟨q, hq, le_sup_left.trans hx1, hx2⟩, le_sup_right.trans hx1⟩
  · rintro ⟨⟨q, hq, hxq1, hxq2⟩, hxm⟩
    exact ⟨(q.1 ⊔ m, q.2), ⟨q, hq, rfl⟩, sup_le hxq1 hxm, hxq2⟩

theorem presentedIntervals_decodeQPairList_clipGeListCode (m c : ℕ) :
    presentedIntervals (decodeQPairList (clipGeListCode m c)) =
      presentedIntervals (decodeQPairList c) ∩ Set.Ici (decodeRat m) := by
  rw [← presentedIntervals_map_qpClipGe]
  apply presentedIntervals.congr
  intro p
  rw [mem_decodeQPairList_clipGeListCode, List.mem_map]
  simp only [eq_comm]

theorem presentedIntervals_map_qpClipLt (m : ?) (L : List (? × ?)) :
    presentedIntervals (L.map (qpClipLt m)) = presentedIntervals L ∩ Set.Iio m := by
  ext x
  simp only [presentedIntervals.mem, List.mem_map, Set.mem_inter_iff, Set.mem_Iio,
    qpClipLt]
  constructor
  · rintro ⟨p, ⟨q, hq, rfl⟩, hx1, hx2⟩
    exact ⟨⟨q, hq, hx1, hx2.trans_le inf_le_left⟩, hx2.trans_le inf_le_right⟩
  · rintro ⟨⟨q, hq, hxq1, hxq2⟩, hxm⟩
    exact ⟨(q.1, q.2 ⊓ m), ⟨q, hq, rfl⟩, hxq1, lt_inf_iff.mpr ⟨hxq2, hxm⟩⟩

theorem presentedIntervals_decodeQPairList_clipLtListCode (m c : ℕ) :
    presentedIntervals (decodeQPairList (clipLtListCode m c)) =
      presentedIntervals (decodeQPairList c) ∩ Set.Iio (decodeRat m) := by
  rw [← presentedIntervals_map_qpClipLt]
  apply presentedIntervals.congr
  intro p
  rw [mem_decodeQPairList_clipLtListCode, List.mem_map]
  simp only [eq_comm]

theorem primrec_clipGeCode : Nat.Primrec clipGeCode := by
  have hm : Nat.Primrec (fun t : ℕ => t.unpair.1) := Nat.Primrec.left
  have he1 : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have he2 : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  exact (Nat.Primrec.pair (primrec_ratMaxCode.comp (he1.pair hm)) he2).of_eq
    fun t => by simp only [clipGeCode]

theorem primrec_clipGeListCode : Nat.Primrec (fun t : ℕ => clipGeListCode t.unpair.1 t
```

```
    .unpair.2) := by
  have hg : Nat.Primrec (fun t : ℕ => Nat.pair (clipGeCode t) 0 + 1) :=
    Nat.Primrec.succ.comp (primrec_clipGeCode.pair (Nat.Primrec.const 0))
  exact (primrec_flatMapCode hg).of_eq fun _ => rfl

theorem primrec_clipLtCode : Nat.Primrec clipLtCode := by
  have hm : Nat.Primrec (fun t : ℕ => t.unpair.1) := Nat.Primrec.left
  have he1 : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have he2 : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  exact (Nat.Primrec.pair he1 (primrec_ratMinCode.comp (he2.pair hm))).of_eq
    fun t => by simp only [clipLtCode]

theorem primrec_clipLtListCode : Nat.Primrec (fun t : ℕ => clipLtListCode t.unpair.1 t
    .unpair.2) := by
  have hg : Nat.Primrec (fun t : ℕ => Nat.pair (clipLtCode t) 0 + 1) :=
    Nat.Primrec.succ.comp (primrec_clipLtCode.pair (Nat.Primrec.const 0))
  exact (primrec_flatMapCode hg).of_eq fun _ => rfl

theorem primrec_firstElemCode : Nat.Primrec firstElemCode :=
  Nat.Primrec.left.comp primrec_pred

theorem primrec_splitMidCode : Nat.Primrec splitMidCode :=
  (primrec_ratMidCode.comp (primrec_firstElemCode.comp primrec_canonCode)).of_eq fun n
     => by
    simp only [splitMidCode]

theorem primrec_splitULeft : Nat.Primrec splitULeft :=
  (primrec_clipLtListCode.comp (primrec_splitMidCode.pair primrec_canonCode)).of_eq
    fun n => by simp only [splitULeft, unpair_pair_fst, unpair_pair_snd]

theorem primrec_splitURight : Nat.Primrec splitURight :=
  (primrec_clipGeListCode.comp (primrec_splitMidCode.pair primrec_canonCode)).of_eq
    fun n => by simp only [splitURight, unpair_pair_fst, unpair_pair_snd]

theorem splitU_p0_lt (n : ℕ) :
    (decodeRatPair (firstElemCode (canonCode n))).1 < (decodeRatPair (firstElemCode (
    canonCode n))).2 :=
  forall_lt_decodeQPairList_canonCode n _
    (mem_decodeQPairList_firstElemCode (canonCode_ne_zero n))

theorem splitU_mid_gt (n : ℕ) :
    (decodeRatPair (firstElemCode (canonCode n))).1 < decodeRat (splitMidCode n) := by
  show decodeRat (firstElemCode (canonCode n)).unpair.1 < decodeRat (splitMidCode n)
  unfold splitMidCode
  rw [decodeRat_ratMidCode']
  have h := splitU_p0_lt n
  unfold decodeRatPair at h
  exact left_lt_add_div_two.mpr h

theorem UX_splitULeft (n : ℕ) :
    UX (splitULeft n) = UX n ∩ Set.Iio (decodeRat (splitMidCode n)) := by
  have hUL : U.mem (presentedIntervals (decodeQPairList (splitULeft n))) := by
    show U.mem (presentedIntervals (decodeQPairList (clipLtListCode (splitMidCode n) (
    canonCode n))))
```

```
    rw [presentedIntervals_decodeQPairList_clipLtListCode]
    refine ⟨⟨(decodeQPairList (canonCode n)).map (qpClipLt (decodeRat (splitMidCode n))
    ),
      (presentedIntervals_map_qpClipLt _ _).symm⟩, ?_, ?_⟩
    · refine ⟨(decodeRatPair (firstElemCode (canonCode n))).1, ?_, splitU_mid_gt n⟩
      exact presentedIntervals.mem.mpr ⟨decodeRatPair (firstElemCode (canonCode n)),
        mem_decodeQPairList_firstElemCode (canonCode_ne_zero n), le_refl _,
    splitU_p0_lt n⟩
    · exact Set.inter_subset_left.trans (U_mem_UX n).2.2
  show presentedIntervals (decodeQPairList (canonCode (splitULeft n))) = _
  rw [presentedIntervals_decodeQPairList_canonCode, canonList_fixed hUL]
  show presentedIntervals (decodeQPairList (clipLtListCode (splitMidCode n) (canonCode
    n))) = _
  rw [presentedIntervals_decodeQPairList_clipLtListCode]
  rfl

theorem splitU_mid_lt (n : ℕ) :
    decodeRat (splitMidCode n) < (decodeRatPair (firstElemCode (canonCode n))).2 := by
  show decodeRat (splitMidCode n) < decodeRat (firstElemCode (canonCode n)).unpair.2
  unfold splitMidCode
  rw [decodeRat_ratMidCode']
  have h := splitU_p0_lt n
  unfold decodeRatPair at h
  exact add_div_two_lt_right.mpr h

theorem UX_splitURight (n : ℕ) :
    UX (splitURight n) = UX n ∩ Set.Ici (decodeRat (splitMidCode n)) := by
  have hUL : U.mem (presentedIntervals (decodeQPairList (splitURight n))) := by
    show U.mem (presentedIntervals (decodeQPairList (clipGeListCode (splitMidCode n) (
    canonCode n))))
    rw [presentedIntervals_decodeQPairList_clipGeListCode]
    refine ⟨⟨(decodeQPairList (canonCode n)).map (qpClipGe (decodeRat (splitMidCode n))
    ),
      (presentedIntervals_map_qpClipGe _ _).symm⟩, ?_, ?_⟩
    · refine ⟨decodeRat (splitMidCode n), ?_, Set.self_mem_Ici⟩
      exact presentedIntervals.mem.mpr ⟨decodeRatPair (firstElemCode (canonCode n)),
        mem_decodeQPairList_firstElemCode (canonCode_ne_zero n), (splitU_mid_gt n).le,
     splitU_mid_lt n⟩
    · exact Set.inter_subset_left.trans (U_mem_UX n).2.2
  show presentedIntervals (decodeQPairList (canonCode (splitURight n))) = _
  rw [presentedIntervals_decodeQPairList_canonCode, canonList_fixed hUL]
  show presentedIntervals (decodeQPairList (clipGeListCode (splitMidCode n) (canonCode
    n))) = _
  rw [presentedIntervals_decodeQPairList_clipGeListCode]
  rfl

theorem splitU_disjoint (n : ℕ) : UX (splitULeft n) ∩ UX (splitURight n) = ∅ := by
  rw [UX_splitULeft, UX_splitURight]
  ext x
  simp only [Set.mem_inter_iff, Set.mem_Iio, Set.mem_Ici, Set.mem_empty_iff_false,
    iff_false]
  rintro ⟨⟨-, h1⟩, -, h2⟩
  exact absurd h1 (not_lt.mpr h2)

theorem splitU_left_ne (n : ℕ) : UX (splitULeft n) = UX n := by
  intro hEq
```

```
  have hZsub : UX (splitURight n) ⊆ UX (splitULeft n) := by
    rw [hEq, UX_splitURight]; exact Set.inter_subset_left
  have hZempty : UX (splitURight n) ⊆ (∅ : Set ?) := by
    rw [← splitU_disjoint n]; exact Set.subset_inter hZsub subset_rfl
  exact (U_mem_UX (splitURight n)).2.1.ne_empty (Set.subset_empty_iff.mp hZempty)

theorem splitU_right_ne (n : ℕ) : UX (splitURight n) = UX n := by
  intro hEq
  have hYsub : UX (splitULeft n) ⊆ UX (splitURight n) := by
    rw [hEq, UX_splitULeft]; exact Set.inter_subset_left
  have hYempty : UX (splitULeft n) ⊆ (∅ : Set ?) := by
    rw [← splitU_disjoint n]; exact Set.subset_inter subset_rfl hYsub
  exact (U_mem_UX (splitULeft n)).2.1.ne_empty (Set.subset_empty_iff.mp hYempty)

theorem splitU_union (n : ℕ) : UX (splitULeft n) ∪ UX (splitURight n) = UX n := by
  rw [UX_splitULeft, UX_splitURight]
  ext x
  simp only [Set.mem_union, Set.mem_inter_iff, Set.mem_Iio, Set.mem_Ici]
  constructor
  · rintro (⟨h, -⟩ | ⟨h, -⟩) <;> exact h
  · intro h
    rcases lt_or_ge x (decodeRat (splitMidCode n)) with hlt | hge
    · exact Or.inl ⟨h, hlt⟩
    · exact Or.inr ⟨h, hge⟩

end DomainTheory.NeighbourhoodSystems
```

TreeVal_more.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.finGen
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.TreeVal
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_8
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive

variable (r : ℕ → ℕ) (x : (SubD UComputablePresentation).Element)

def Q2X (c : ℕ) : Set ? := UX (TreeVal r c)

def Q2inter (c1 c2 : ℕ) : ℕ := nodeCode c1 c2

def listToTreeAux : ℕ → List ℕ → ℕ
  | acc, [] => acc
  | acc, j :: l => listToTreeAux (nodeCode acc (leafCode j)) l
```

```
theorem primrec_Q2inter : Nat.Primrec (fun t : ℕ => Q2inter t.unpair.1 t.unpair.2) :=
    by
  have heq : (fun t : ℕ => Q2inter t.unpair.1 t.unpair.2) = fun t => Nat.pair 1 t :=
    by
    funext t; unfold Q2inter nodeCode; rw [pair_unpair]
  rw [heq]
  exact Nat.Primrec.pair (Nat.Primrec.const 1) Nat.Primrec.id

theorem Q2_interEq_computable (hr : Nat.Primrec r) :
    RecDecidable₃ (fun n m k => Q2X r n ∩ Q2X r m = Q2X r k) := by
  have hTV := primrec_TreeVal r hr
  have hreindex : Nat.Primrec (fun t : ℕ => Nat.pair (TreeVal r t.unpair.1)
      (Nat.pair (TreeVal r t.unpair.2.unpair.1) (TreeVal r t.unpair.2.unpair.2))) :=
    (hTV.comp Nat.Primrec.left).pair
      ((hTV.comp (Nat.Primrec.left.comp Nat.Primrec.right)).pair
        (hTV.comp (Nat.Primrec.right.comp Nat.Primrec.right)))
  refine RecDecidable.of_iff (fun t => ?_) (U_interEq_computable.comp hreindex)
  simp only [unpair_pair_fst, unpair_pair_snd]
  rfl

theorem Q2X_masterIdx_spec :
    Q2X r masterCode = (toSubsystemSys UComputablePresentation x).master := by
  show UX (TreeVal r masterCode) = U.master
  rw [TreeVal_master]
  exact UX_UmasterIdx

theorem Q'x_surj
    (hspec : ∀ i, (toSubsystemSys UComputablePresentation x).mem (UX i) ↔ ∃ n, r n = i
    )
    {Y : Set ?} (hY : (toSubsystemSys UComputablePresentation x).mem Y) :
    ∃ n, Q'X r n = Y := by
  obtain ⟨js, hxjs, sub, hsub, hDY, hYeq⟩ := hY
  have hjsmem : ∀ i ∈ js, (toSubsystemSys UComputablePresentation x).mem (UX i) :=
    (mem_nbhdGen_iff UComputablePresentation x js).mp hxjs
  have hsubmem : ∀ i ∈ sub, (toSubsystemSys UComputablePresentation x).mem (UX i) :=
    fun i hi => hjsmem i (hsub.subset hi)
  obtain ⟨sub0, hsub0⟩ := exists_preimage_of_forall_mem (fun i hi => (hspec i).mp (
    hsubmem i hi))
  refine ⟨encodeList sub0, ?_⟩
  rw [Q'X_eq, decodeList_encodeList, hsub0, hYeq]
  exact idxchain_spec UComputablePresentation (hYeq ▸ hDY)

theorem Q2x_mem_X (hspec : ∀ i, (toSubsystemSys UComputablePresentation x).mem (UX i)
    ↔ ∃ n, r n = i) :
    ∀ c, (toSubsystemSys UComputablePresentation x).mem (Q2X r c) := by
  intro c
  induction c using Nat.strong_induction_on with
  | _ c ih =>
    show (toSubsystemSys UComputablePresentation x).mem (UX (TreeVal r c))
    rcases Nat.lt_or_ge c.unpair.1 2 with htag | htag
    · have htag01 : c.unpair.1 = 0 ∨ c.unpair.1 = 1 := by omega
      rcases htag01 with htagv | htagv
      · rw [TreeVal_of_tag0 r htagv]
        exact (hspec (r c.unpair.2)).mpr ⟨c.unpair.2, rfl⟩
      · rw [TreeVal_of_tag1 r htagv]
```

```
        have hsndlt : c.unpair.2 < c := unpair_snd_lt_of_unpair_fst_pos (by omega)
        have ht1 : c.unpair.2.unpair.1 < c := lt_of_le_of_lt (unpair_left_le c.unpair
    .2) hsndlt
        have ht2 : c.unpair.2.unpair.2 < c := lt_of_le_of_lt (unpair_snd_le c.unpair
    .2) hsndlt
        have hm1 := ih c.unpair.2.unpair.1 ht1
        have hm2 := ih c.unpair.2.unpair.2 ht2
        unfold Q2X at hm1 hm2
        rcases UX_Uinter_dichotomy (TreeVal r c.unpair.2.unpair.1) (TreeVal r c.unpair
    .2.unpair.2)
          with hcase | hcase
        · rw [hcase]; exact (toSubsystemSys UComputablePresentation x).master_mem
        · rw [hcase]
          obtain ⟨jsA, hxA, subA, hsubA, hDA, hAeq⟩ := hm1
          obtain ⟨jsB, hxB, subB, hsubB, hDB, hBeq⟩ := hm2
          have hUmem : U.mem (UX (TreeVal r c.unpair.2.unpair.1) ∩ UX (TreeVal r c.
    unpair.2.unpair.2)) :=
            hcase ▶ U_mem_UX (Uinter (TreeVal r c.unpair.2.unpair.1) (TreeVal r c.
    unpair.2.unpair.2))
          refine ⟨jsA ++ jsB, nbhdGen_inter UComputablePresentation jsA jsB ▶ x.
    inter_mem hxA hxB,
            subA ++ subB, hsubA.append hsubB, hUmem, ?_⟩
          rw [hAeq, hBeq, interFrom_append_eq UComputablePresentation U.master subA
    subB]
    · rw [TreeVal_of_tag_ge2 r htag]
      show (toSubsystemSys UComputablePresentation x).mem (UX UmasterIdx)
      rw [UX_UmasterIdx]
      exact (toSubsystemSys UComputablePresentation x).master_mem

theorem Q2_cons_computable (hr : Nat.Primrec r) :
    RecDecidable₂ (fun n m => ∃ k, Q2X r k ⊆ Q2X r n ∩ Q2X r m) := by
  have hTV := primrec_TreeVal r hr
  have hreindex : Nat.Primrec (fun t : ℕ => Nat.pair (TreeVal r t.unpair.1) (TreeVal r
     t.unpair.2)) :=
    (hTV.comp Nat.Primrec.left).pair (hTV.comp Nat.Primrec.right)
  refine RecDecidable.of_iff (fun t => ?_) (U_cons_computable.comp hreindex)
  simp only [unpair_pair_fst, unpair_pair_snd]
  constructor
  · rintro ⟨k, hk⟩
    exact ⟨TreeVal r k, hk⟩
  · rintro ⟨k, hk⟩
    refine ⟨nodeCode t.unpair.1 t.unpair.2, ?_⟩
    show UX (TreeVal r (nodeCode t.unpair.1 t.unpair.2)) ⊆
      UX (TreeVal r t.unpair.1) ∩ UX (TreeVal r t.unpair.2)
    rw [TreeVal_node, Uinter_spec ⟨k, hk⟩]

theorem Q2inter_spec {n m : ℕ} (h : ∃ k, Q2X r k ⊆ Q2X r n ∩ Q2X r m) :
    Q2X r (Q2inter n m) = Q2X r n ∩ Q2X r m := by
  obtain ⟨k, hk⟩ := h
  show UX (TreeVal r (nodeCode n m)) = UX (TreeVal r n) ∩ UX (TreeVal r m)
  rw [TreeVal_node]
  exact Uinter_spec ⟨TreeVal r k, hk⟩

theorem TreeVal_listToTreeAux (acc : ℕ) (l : List ℕ) :
    TreeVal r (listToTreeAux acc l) = l.foldl (fun a j => Uinter a (r j)) (TreeVal r
    acc) := by
```

```
  induction l generalizing acc with
  | nil => simp [listToTreeAux]
  | cons j l ih =>
    simp only [listToTreeAux, List.foldl_cons]
    rw [ih, TreeVal_node, TreeVal_leaf]

theorem Q2x_surj (hspec : ∀ i, (toSubsystemSys UComputablePresentation x).mem (UX i) ↔
    ∃ n, r n = i)
    {Y : Set ?} (hY : (toSubsystemSys UComputablePresentation x).mem Y) :
    ∃ c, Q2X r c = Y := by
  obtain ⟨n, hn⟩ := Q'x_surj r x hspec hY
  refine ⟨listToTreeAux masterCode (decodeList n), ?_⟩
  have hcode : (decodeList n).foldl (fun a j => Uinter a (r j))
    UComputablePresentation.masterIdx
      = idxchain UComputablePresentation (List.map r (decodeList n)) := by
    unfold idxchain
    rw [List.foldl_map]
    rfl
  show UX (TreeVal r (listToTreeAux masterCode (decodeList n))) = Y
  rw [TreeVal_listToTreeAux, TreeVal_master, hcode, ← Q'X_eq]
  exact hn

def Q'xPresentation (hr : Nat.Primrec r)
    (hspec : ∀ i, (toSubsystemSys UComputablePresentation x).mem (UX i) ↔ ∃ n, r n = i
    ) :
    ComputablePresentation (toSubsystemSys UComputablePresentation x) where
  X := Q2X r
  mem_X := Q2x_mem_X r x hspec
  surj := Q2x_surj r x hspec
  interEq_computable := Q2_interEq_computable r hr
  cons_computable := Q2_cons_computable r hr
  inter := Q2inter
  inter_primrec := primrec_Q2inter
  inter_spec := fun h => Q2inter_spec r h
  masterIdx := masterCode
  masterIdx_spec := Q2X_masterIdx_spec r x

theorem toSubsystemSys_mem_foldl_Uinter (acc : ℕ)
    (L : List ℕ) (hacc : (toSubsystemSys UComputablePresentation x).mem (UX acc))
    (hL : ∀ i ∈ L, (toSubsystemSys UComputablePresentation x).mem (UX i)) :
    (toSubsystemSys UComputablePresentation x).mem
      (UX (L.foldl (fun a j => Uinter a j) acc)) := by
  induction L generalizing acc with
  | nil => simpa using hacc
  | cons j L' ih =>
    rw [List.forall_mem_cons] at hL
    have hacc' : (toSubsystemSys UComputablePresentation x).mem (UX (Uinter acc j)) :=
     by
      rcases UX_Uinter_dichotomy acc j with hcase | hcase
      · rw [hcase]; exact (toSubsystemSys UComputablePresentation x).master_mem
      · rw [hcase]
        obtain ⟨jsA, hxA, subA, hsubA, hDA, hAeq⟩ := hacc
        obtain ⟨jsJ, hxJ, subJ, hsubJ, hDJ, hJeq⟩ := hL.1
        have hUmem : U.mem (UX acc ∩ UX j) := hcase ▸ U_mem_UX (Uinter acc j)
        refine ⟨jsA ++ jsJ,
          nbhdGen_inter UComputablePresentation jsA jsJ ▸ x.inter_mem hxA hxJ,
```

```
          subA ++ subJ, hsubA.append hsubJ, hUmem, ?_⟩
        rw [hAeq, hJeq, interFrom_append_eq UComputablePresentation U.master subA subJ
    ]
    exact ih (Uinter acc j) hacc' hL.2

theorem Q'x_mem_X
    (hspec : ∀ i, (toSubsystemSys UComputablePresentation x).mem (UX i) ↔ ∃ n, r n = i
    ) (n : ℕ) :
    (toSubsystemSys UComputablePresentation x).mem (Q'X r n) := by
  rw [Q'X_eq]
  show (toSubsystemSys UComputablePresentation x).mem
      (UX ((List.map r (decodeList n)).foldl (fun a j => Uinter a j)
        UComputablePresentation.masterIdx))
  apply toSubsystemSys_mem_foldl_Uinter
  · show (toSubsystemSys UComputablePresentation x).mem (UX UmasterIdx)
    rw [UX_UmasterIdx]
    exact (toSubsystemSys UComputablePresentation x).master_mem
  · intro i hi
    obtain ⟨j, -, rfl⟩ := List.mem_map.mp hi
    exact (hspec (r j)).mpr ⟨j, rfl⟩

end DomainTheory.NeighbourhoodSystems
```

SubsystemDomain.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.finGen
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.TreeVal
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    TreeVal_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_8

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    VComputablePresentation

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α}

section Computability

variable (P : ComputablePresentation D)

def SubDX (n : ℕ) : Set (List ℕ) := nbhdGen P (decodeList n)
```

```
theorem SubDX_inter_eq (n m : ℕ) :
    SubDX P (appendListCode n m) = SubDX P n ∩ SubDX P m := by
  show nbhdGen P (decodeList (appendListCode n m))
      = nbhdGen P (decodeList n) ∩ nbhdGen P (decodeList m)
  rw [appendListCode_eq, nbhdGen_inter]

theorem SubDX_masterIdx_spec : SubDX P (encodeList ([] : List ℕ)) = (SubD P).master :=
    by
  show nbhdGen P (decodeList (encodeList ([] : List ℕ))) = nbhdGen P []
  rw [decodeList_encodeList]

theorem SubDX_mem (n : ℕ) : (SubD P).mem (SubDX P n) := ⟨decodeList n, rfl⟩

theorem SubDX_surj {N : Set (List ℕ)} (hN : (SubD P).mem N) : ∃ n, SubDX P n = N := by
  obtain ⟨js, rfl⟩ := hN
  exact ⟨encodeList js, by unfold SubDX; rw [decodeList_encodeList]⟩

theorem SubD_cons_computable :
    RecDecidable₂ (fun n m => ∃ k, SubDX P k ⊆ SubDX P n ∩ SubDX P m) := by
  refine recDecidable_of_forall (fun t => ⟨appendListCode t.unpair.1 t.unpair.2, ?_⟩)
  rw [SubDX_inter_eq]

theorem consUpd_foldl_idx (projFn fc : ℕ → ℕ) (el : List ℕ) (b a flag : ℕ) :
    (List.foldl (fun s x => consUpd P projFn fc s x) (Nat.pair b (Nat.pair a flag)) el
    ).unpair.2.unpair.1
      = (List.map projFn (bitSelect el b)).foldl (fun acc j => P.inter acc j) a := by
  induction el generalizing b a flag with
  | nil => rw [bitSelect_nil, List.foldl_nil, List.map_nil, List.foldl_nil,
    unpair_pair_snd,
      unpair_pair_fst]
  | cons e el ih =>
    rw [List.foldl_cons, consUpd_eval, bitSelect_cons]
    by_cases hb : b % 2 = 1
    · rw [ite_eq_left hb, List.map_cons, List.foldl_cons, hb, selectFn_one]
      exact ih (b / 2) (P.inter a (projFn e)) _
    · rw [ite_eq_right hb, show b % 2 = 0 by omega, selectFn_zero]
      exact ih (b / 2) a flag

def idxCharAt (fc : ℕ → ℕ) (w : ℕ) : ℕ :=
  (foldCode (consStp P id fc) 0 (Nat.pair w.unpair.1 (Nat.pair P.masterIdx 1))
    w.unpair.2).unpair.2.unpair.1

theorem idxCharAt_eq_idxchain (fc : ℕ → ℕ) (w : ℕ) :
    idxCharAt P fc w = idxchain P (bitSelect (decodeList w.unpair.2) w.unpair.1) := by
  unfold idxCharAt idxchain
  rw [foldCode_eq']
  have hstep : (fun acc x => consStp P id fc (Nat.pair x (Nat.pair acc 0)))
      = (fun acc x => consUpd P id fc acc x) := by
    funext acc x
    show consStp P id fc (Nat.pair x (Nat.pair acc 0)) = _
    unfold consStp
    simp only [unpair_pair_fst, unpair_pair_snd]
  rw [hstep, consUpd_foldl_idx P id fc (decodeList w.unpair.2) w.unpair.1 P.masterIdx
    1,
    List.map_id]
```

```
theorem primrec_idxCharAt {fc : ℕ → ℕ} (hfcp : Nat.Primrec fc) :
    Nat.Primrec (idxCharAt P fc) := by
  have hfold := primrec_foldCode (primrec_consStp P primrec_id hfcp) (Nat.Primrec.
    const 0)
    (Nat.Primrec.left.pair ((Nat.Primrec.const P.masterIdx).pair (Nat.Primrec.const 1)
    ))
    Nat.Primrec.right
  exact Nat.Primrec.left.comp (Nat.Primrec.right.comp hfold)

theorem mem_finGen_computable :
    RecDecidable₂ (fun m c => P.X m ∈ finGen P (decodeList c)) := by
  obtain ⟨fc, hfcp, hfcs⟩ := P.cons_computable
  have hfc : ∀ s, fc s = 1 ↔ ∃ k, P.X k ⊆ P.X s.unpair.1 ∩ P.X s.unpair.2 := fun s =>
     (hfcs s).symm
  have hconsFold := consFold_decidable P id fc hfc primrec_id hfcp
  have hg : Nat.Primrec (fun w : ℕ => Nat.pair w.unpair.1 w.unpair.2.unpair.2) :=
    Nat.Primrec.left.pair (Nat.Primrec.right.comp Nat.Primrec.right)
  have hp1 : RecDecidable (fun w : ℕ =>
      D.mem (interFrom P D.master (bitSelect (decodeList w.unpair.2.unpair.2) w.unpair
    .1))) := by
    refine RecDecidable.of_iff (fun w => ?_) (hconsFold.comp hg)
    simp only [unpair_pair_fst, unpair_pair_snd, List.map_id]
  have hidx : Nat.Primrec (fun w : ℕ => idxCharAt P fc (Nat.pair w.unpair.1 w.unpair
    .2.unpair.2)) :=
    (primrec_idxCharAt P hfcp).comp hg
  have hh : Nat.Primrec (fun w : ℕ =>
      Nat.pair w.unpair.2.unpair.1 (idxCharAt P fc (Nat.pair w.unpair.1 w.unpair.2.
    unpair.2))) :=
    (Nat.Primrec.left.comp Nat.Primrec.right).pair hidx
  have hp2 : RecDecidable (fun w : ℕ =>
      P.X w.unpair.2.unpair.1 = P.X (idxCharAt P fc (Nat.pair w.unpair.1 w.unpair.2.
    unpair.2))) := by
    refine RecDecidable.of_iff (fun w => ?_) (P.eq_computable.comp hh)
    simp only [unpair_pair_fst, unpair_pair_snd]
  have hp := hp1.and hp2
  have hbound : Nat.Primrec (fun n : ℕ => 2 ^ n.unpair.2) := primrec_two_pow Nat.
    Primrec.right
  have hbe := hp.bExists (bound := fun n : ℕ => 2 ^ n.unpair.2) hbound
  refine RecDecidable.of_iff (fun t => ?_) hbe
  simp only [unpair_pair_fst, unpair_pair_snd]
  constructor
  · rintro ⟨sub, hsub, -, hYeq⟩
    obtain ⟨b, hb, hbeq⟩ := exists_bitSelect_lt hsub
    have hb' : b < 2 ^ t.unpair.2 :=
      lt_of_lt_of_le hb (Nat.pow_le_pow_right (by omega) (decodeList_length_le t.
    unpair.2))
    have hDsub : D.mem (interFrom P D.master sub) := hYeq ▸ P.mem_X t.unpair.1
    refine ⟨b, hb', hbeq ▸ hDsub, ?_⟩
    rw [idxCharAt_eq_idxchain]
    simp only [unpair_pair_fst, unpair_pair_snd]
    rw [hbeq, idxchain_spec P hDsub, ← hYeq]
  · rintro ⟨b, -, hDb, hXeq⟩
    refine ⟨bitSelect (decodeList t.unpair.2) b, bitSelect_sublist _ _, P.mem_X t.
    unpair.1, ?_⟩
    rw [hXeq, idxCharAt_eq_idxchain]
```

```
    simp only [unpair_pair_fst, unpair_pair_snd]
    rw [idxchain_spec P hDb]

theorem finGen_subset_computable :
    RecDecidable₂ (fun c1 c2 => finGen P (decodeList c1) ⊆ finGen P (decodeList c2))
    := by
  have hiff : ∀ c1 c2, finGen P (decodeList c1) ⊆ finGen P (decodeList c2) ↔
      ∀ i ∈ decodeList c1, P.X i ∈ finGen P (decodeList c2) :=
    fun c1 c2 => finGen_le_iff_forall_mem P (finGenSys_subsystem P (decodeList c2)) (
    decodeList c1)
  refine RecDecidable.of_iff (fun t => ?_) (mem_finGen_computable P).bForallList
  exact hiff t.unpair.1 t.unpair.2

theorem SubD_interEq_computable :
    RecDecidable₃ (fun n m k => SubDX P n ∩ SubDX P m = SubDX P k) := by
  have hiff : ∀ n m k, SubDX P n ∩ SubDX P m = SubDX P k ↔
      finGen P (decodeList (appendListCode n m)) ⊆ finGen P (decodeList k) ∧
        finGen P (decodeList k) ⊆ finGen P (decodeList (appendListCode n m)) := by
    intro n m k
    show nbhdGen P (decodeList n) ∩ nbhdGen P (decodeList m) = nbhdGen P (decodeList k
    ) ↔ _
    rw [nbhdGen_inter, ← appendListCode_eq, nbhdGen_eq_iff, Set.Subset.antisymm_iff]
  have hg1 : Nat.Primrec (fun t : ℕ => appendListCode t.unpair.1 t.unpair.2.unpair.1)
    :=
    (primrec_appendListCode.comp
        (Nat.Primrec.left.pair (Nat.Primrec.left.comp Nat.Primrec.right))).of_eq
      (fun t => by simp only [unpair_pair_fst, unpair_pair_snd])
  have hreindex1 : Nat.Primrec (fun t : ℕ =>
      Nat.pair (appendListCode t.unpair.1 t.unpair.2.unpair.1) t.unpair.2.unpair.2) :=
    hg1.pair (Nat.Primrec.right.comp Nat.Primrec.right)
  have hreindex2 : Nat.Primrec (fun t : ℕ =>
      Nat.pair t.unpair.2.unpair.2 (appendListCode t.unpair.1 t.unpair.2.unpair.1)) :=
    (Nat.Primrec.right.comp Nat.Primrec.right).pair hg1
  have hforward : RecDecidable (fun t : ℕ =>
      finGen P (decodeList (appendListCode t.unpair.1 t.unpair.2.unpair.1)) ⊆
        finGen P (decodeList t.unpair.2.unpair.2)) := by
    refine RecDecidable.of_iff (fun t => ?_) ((finGen_subset_computable P).comp
    hreindex1)
    simp only [unpair_pair_fst, unpair_pair_snd]
  have hbackward : RecDecidable (fun t : ℕ =>
      finGen P (decodeList t.unpair.2.unpair.2) ⊆
        finGen P (decodeList (appendListCode t.unpair.1 t.unpair.2.unpair.1))) := by
    refine RecDecidable.of_iff (fun t => ?_) ((finGen_subset_computable P).comp
    hreindex2)
    simp only [unpair_pair_fst, unpair_pair_snd]
  refine RecDecidable.of_iff (fun t => ?_) (hforward.and hbackward)
  exact hiff t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair.2

def SubDPresentation : ComputablePresentation (SubD P) where
  X := SubDX P
  mem_X := SubDX_mem P
  surj := SubDX_surj P
  interEq_computable := SubD_interEq_computable P
  cons_computable := SubD_cons_computable P
  inter := appendListCode
  inter_primrec := primrec_appendListCode
```

```
  inter_spec := fun {n m} _ => SubDX_inter_eq P n m
  masterIdx := encodeList []
  masterIdx_spec := SubDX_masterIdx_spec P

end Computability

section OrderIso

variable (P : ComputablePresentation D)

def subsystemIso : (SubD P).Element ≃o {D' : NeighborhoodSystem α // D' ? D} where
  toFun := toSubsystem P
  invFun x := ofSubsystem P x.1 x.2
  left_inv := ofSubsystem_toSubsystem P
  right_inv x := toSubsystem_ofSubsystem P x.1 x.2
  map_rel_iff' := by
    intro a b
    show toSubsystemSys P a ? toSubsystemSys P b ↔ (∀ N, a.mem N → b.mem N)
    rw [Subsystem.subsystem_iff_subset_of_common (toSubsystemSys_subsystem P a)
      (toSubsystemSys_subsystem P b)]
    constructor
    · intro hYsub N hN
      obtain ⟨js, rfl⟩ := a.sub hN
      exact (mem_nbhdGen_iff P b js).mpr
        (fun i hi => hYsub ((mem_nbhdGen_iff P a js).mp hN i hi))
    · rintro hab Y ⟨js, haj, hY⟩
      exact ⟨js, hab (nbhdGen P js) haj, hY⟩

end OrderIso

section ComputableElements

variable (P : ComputablePresentation D)

theorem primrec_encodeList_singleton : Nat.Primrec (fun i => encodeList [i]) := by
  have : (fun i => encodeList [i]) = fun i => Nat.pair i 0 + 1 := by
    funext i; show Nat.pair i (encodeList ([] : List ℕ)) + 1 = Nat.pair i 0 + 1
    rw [encodeList]
  rw [this]
  exact Nat.Primrec.succ.comp (Nat.Primrec.pair primrec_id (Nat.Primrec.const 0))

theorem subsystemU_computable_iff_index_set_re (x : (SubD P).Element) :
    ComputableElement (SubDPresentation P) x ↔
      REPred (fun i => (toSubsystemSys P x).mem (P.X i)) := by
  have hiff : ∀ n, x.mem (SubDX P n) ↔ ∀ i ∈ decodeList n, (toSubsystemSys P x).mem (P
    .X i) := by
    intro n; unfold SubDX; exact mem_nbhdGen_iff P x (decodeList n)
  constructor
  · intro hx
    have hx' : REPred (fun n => ∀ i ∈ decodeList n, (toSubsystemSys P x).mem (P.X i))
    :=
      REPred.of_iff (fun n => (hiff n).symm) hx.out
    refine REPred.of_iff (fun i => ?_) (hx'.comp primrec_encodeList_singleton)
    rw [decodeList_encodeList]
    simp only [List.mem_singleton]
    constructor
```

```
    · intro h j hj; rw [hj]; exact h
    · intro h; exact h i rfl
  · intro hx
    constructor
    exact REPred.of_iff hiff hx.forall_mem_decodeList

theorem subsystemU_element_computable_iff (x : (SubD P).Element) :
    ComputableElement (SubDPresentation P) x ↔
      ∃ r : ℕ → ℕ, Nat.Primrec r ∧
        ∀ i, (toSubsystemSys P x).mem (P.X i) ↔ ∃ n, r n = i := by
  rw [subsystemU_computable_iff_index_set_re P x]
  constructor
  · intro hre
    have ha : (toSubsystemSys P x).mem (P.X P.masterIdx) := by
      rw [P.masterIdx_spec]; exact (toSubsystemSys P x).master_mem
    exact Exercise714.repred_exists_primrec_range hre ha
  · rintro ⟨r, hr, hspec⟩
    exact REPred.of_iff hspec (Exercise714.repred_range_primrec hr)

end ComputableElements

section UniversalSubsystem
section TreeVal2

variable (r : ℕ → ℕ) (x : (SubD UComputablePresentation).Element)

theorem subsystemU_effectivelyGiven_of_isComputableElement
    (hx : ComputableElement (SubDPresentation UComputablePresentation) x) :
    (toSubsystemSys UComputablePresentation x).IsEffectivelyGiven := by
  obtain ⟨r, hr, hspec⟩ := (subsystemU_element_computable_iff UComputablePresentation x
    ).mp hx
  exact ⟨Q'xPresentation r x hr hspec⟩

end TreeVal2
end UniversalSubsystem

theorem subsystem_isEffectivelyGiven_of_isEffectivelyGiven (hD : D.IsEffectivelyGiven)
    :
    ∃ V : NeighborhoodSystem (List ℕ), V.IsEffectivelyGiven ∧
      Nonempty (V.Element ≃o {D' : NeighborhoodSystem α // D' ? D}) := by
  obtain ⟨P⟩ := hD
  exact ⟨SubD P, ⟨SubDPresentation P⟩, ⟨subsystemIso P⟩⟩

end DomainTheory.NeighbourhoodSystems
```

XPseq812c.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.V
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_8
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    VComputablePresentation
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
```

```
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPair812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    splitSpec812c

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

open Classical in

noncomputable def XPseq (n : ℕ) : Set β :=
  ⋃ ?' : Fin n → Bool × Bool,
    (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n).1
      (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n).2 (X n) true).2

end AtomPair
end

namespace XPseq
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem empty_or_mem (n : ℕ) :
    XPseq D₀ D₁ hD₀nomin hD₁nomin X Y n = ∅ ∨ D₁.mem (XPseq D₀ D₁ hD₀nomin hD₁nomin X Y n
    ) := by
  apply iUnion_mem_or_empty hD₁pos hD₁diff
  intro ?'
```

```
  obtain ⟨hAB, -, hBmem⟩ := atomPair.invariant D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁
    diff
    hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne (extendTruePair ?') n
  exact (splitChoice'_isSplitSpec D₁ hD₁nomin hAB hBmem (X n)).1

end AtomPair
end

end XPseq
namespace xStep
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem spec (? : ℕ → Bool × Bool) (n : ℕ) :
    ((xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).2 = ∅ ↔
      (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).1 = ∅) ∧
      ((xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
          (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).1 = ∅ ∨
        D₀.mem (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
          (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).1) := by
  obtain ⟨ihAB, ihA, ihB⟩ := atomPair.invariant D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁
    diff
    hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne ? n
  set A := (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1 with hAdef
  set B := (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 with hBdef
  have hspec1 := splitChoice'_isSplitSpec D₁ hD₁nomin ihAB ihB (X n)
  refine ⟨?_, ?_⟩
  · by_cases h?1 : (? n).1 = true
    · simp only [xStep, xyStep, h?1, ite_true]; exact hspec1.2.2.1.symm
    · simp only [xStep, xyStep, h?1]; exact hspec1.2.2.2.1.symm
  · by_cases h?1 : (? n).1 = true
    · simp only [xStep, xyStep, h?1, ite_true]; exact inter.mem_or_empty hD₀pos ihA (
    hXmem n)
    · simp only [xStep, xyStep, h?1]; exact diff.mem_or_empty hD₀diff ihA (hXmem n)

end AtomPair
end

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
```

```
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem spec_bit (? : ℕ → Bool × Bool) (n : ℕ) (bx : Bool) :
    ((xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) bx).2 = ∅ ↔
      (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) bx).1 = ∅) ∧
      ((xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
          (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) bx).1 = ∅ ∨
        D₀.mem (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
          (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) bx).1) := by
  set ?'' := Function.update (extendTruePair (restrictFinPair ? n)) n (bx, true) with
    h?''def
  have hagree : ∀ i < n, ?'' i = ? i := by
    intro i hi
    have h1 : ?'' i = (extendTruePair (restrictFinPair ? n)) i := by
      simp [h?''def, Function.update_of_ne (ne_of_lt hi)]
    rw [h1]; exact extendTruePair_restrictFinPair_agree ? n i hi
  have hbit : (?'' n).1 = bx := by simp [h?''def]
  have hcongr : atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?'' n =
      atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n := atomPair.congr D₀ D₁ hD₀nomin hD₁nomin
    X Y hagree
  have hspec := xStep.spec D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
    hD₀mne hD₁mne ?'' n
  rwa [hcongr, hbit] at hspec

end AtomPair
end

end xStep
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

open Classical in

noncomputable def YPseq (n : ℕ) : Set α :=
```

```
  ⋃ (?' : Fin n → Bool × Bool) (bx : Bool),
    (yStep D₀ hD₀nomin
      (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n).1
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n).2 (X n) bx).1
      (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n).1
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n).2 (X n) bx).2
      (Y n) true).1

end AtomPair
end

namespace YPseq
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem empty_or_mem (n : ℕ) :
    YPseq D₀ D₁ hD₀nomin hD₁nomin X Y n = ∅ ∨ D₀.mem (YPseq D₀ D₁ hD₀nomin hD₁nomin X Y n
    ) := by
  apply iUnion_mem_or_empty hD₀pos hD₀diff
  intro ?'
  apply iUnion_mem_or_empty hD₀pos hD₀diff
  intro bx
  obtain ⟨hBA, hAmem⟩ := xStep.spec_bit D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁
    nomin X Y
    hXmem hYmem hD₀mne hD₁mne (extendTruePair ?') n bx
  exact splitChoice'_isSplitSpec D₀ hD₀nomin hBA hAmem (Y n) |>.1

end AtomPair
end

end YPseq
namespace atomPair
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
```

```
include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem fst_subset (? : ℕ → Bool × Bool) (n : ℕ) :
    (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? (n + 1)).1 ⊆
      (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1 := by
  rw [atomPair.succ_eq]
  obtain ⟨hspecAB, hspecAmem⟩ := xStep.spec D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff
    hD₁nomin
    X Y hXmem hYmem hD₀mne hD₁mne ? n
  exact (yStep.fst_subset hD₀nomin hspecAB hspecAmem (Y n) (? n).2).trans
    (xStep.fst_subset D₁ hD₁nomin _ _ (X n) (? n).1)

end AtomPair
end

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem fst_subset_master (? : ℕ → Bool × Bool) (n : ℕ) :
    (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1 ⊆ D₀.master := by
  induction n with
  | zero => exact subset_rfl
  | succ n ih => exact (atomPair.fst_subset D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff
    hD₁nomin
      X Y hXmem hYmem hD₀mne hD₁mne ? n).trans ih

end AtomPair
end

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem disjoint (? ?' : ℕ → Bool × Bool) :
    ∀ n, (∃ i < n, ? i = ?' i) →
      (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1 ∩
```

```
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' n).1 = ∅ ∧
      (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 ∩
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' n).2 = ∅ := by
intro n
induction n with
| zero => rintro ⟨i, hi, -⟩; exact absurd hi (Nat.not_lt_zero i)
| succ n ih =>
  rintro ⟨i, hi, hine⟩
  by_cases hagree : ∀ j < n, ? j = ?' j
  ·
    have h?n : ? n = ?' n := by
      intro heq
      exact hine (by
        rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
        · exact hagree i hi'
        · exact heq)
    have hpairEq : atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n =
        atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' n :=
      atomPair.congr D₀ D₁ hD₀nomin hD₁nomin X Y hagree
    have hAB' : (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' n).1 =
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1 ∧
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' n).2 =
          (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 :=
      ⟨(congrArg Prod.fst hpairEq).symm, (congrArg Prod.snd hpairEq).symm⟩
    by_cases h1 : (? n).1 = (?' n).1
    ·

      have h2 : (? n).2 = (?' n).2 := fun h2eq => h?n (Prod.ext_iff.mpr ⟨h1, h2eq⟩)
      rw [atomPair.succ_eq, atomPair.succ_eq, hAB'.1, hAB'.2, h1]
      obtain ⟨hspecAB, hspecAmem⟩ := xStep.spec D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD
₁diff
        hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne ? n
      rw [h1] at hspecAB hspecAmem
      exact yStep.disjoint_of_ne hD₀nomin hspecAB hspecAmem (Y n) h2
    ·

      obtain ⟨ihAB, ihA, ihB⟩ := atomPair.invariant D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁
pos hD₁diff
        hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne ? n
      have hxdisj := xStep.disjoint_of_ne hD₁nomin ihAB ihB (X n) h1
      obtain ⟨hspecAB, hspecAmem⟩ := xStep.spec D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD
₁diff
        hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne ? n
      obtain ⟨hspecAB', hspecAmem'⟩ := xStep.spec D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos
hD₁diff
        hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne ?' n
      have h1sub : (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? (n + 1)).1 ⊆
          (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
            (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).1 := by
        rw [atomPair.succ_eq]; exact yStep.fst_subset hD₀nomin hspecAB hspecAmem (Y n
) (? n).2
      have h2sub : (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? (n + 1)).2 ⊆
          (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
            (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).2 := by
        rw [atomPair.succ_eq]; exact yStep.snd_subset D₀ hD₀nomin _ _ (Y n) (? n).2
      have h1sub' : (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' (n + 1)).1 ⊆
```

```
          (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' n).1
            (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' n).2 (X n) (?' n).1).1 := by
        rw [atomPair.succ_eq]; exact yStep.fst_subset hD₀nomin hspecAB' hspecAmem' (Y
     n) (?' n).2
      have h2sub' : (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' (n + 1)).2 ⊆
          (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' n).1
            (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' n).2 (X n) (?' n).1).2 := by
        rw [atomPair.succ_eq]; exact yStep.snd_subset D₀ hD₀nomin _ _ (Y n) (?' n).2
      rw [hAB'.1, hAB'.2] at h1sub' h2sub'
      exact ⟨Set.subset_eq_empty (Set.inter_subset_inter h1sub h1sub') hxdisj.1,
        Set.subset_eq_empty (Set.inter_subset_inter h2sub h2sub') hxdisj.2⟩
  .
    push Not at hagree
    obtain ⟨j, hj, hjne⟩ := hagree
    obtain ⟨hd1, hd2⟩ := ih ⟨j, hj, hjne⟩
    have h1 : (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? (n + 1)).1 ⊆
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1 := atomPair.fst_subset D₀ D₁ hD₀
  pos hD₀diff
        hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne ? n
    have h1' : (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' (n + 1)).1 ⊆
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' n).1 := atomPair.fst_subset D₀ D₁ hD₀
  pos hD₀diff
        hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne ?' n
    have h2 : (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? (n + 1)).2 ⊆
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 := atomPair.snd_subset D₀ D₁ hD₀
  pos hD₀diff
        hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne ? n
    have h2' : (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' (n + 1)).2 ⊆
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ?' n).2 := atomPair.snd_subset D₀ D₁ hD₀
  pos hD₀diff
        hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne ?' n
    exact ⟨Set.subset_eq_empty (Set.inter_subset_inter h1 h1') hd1,
      Set.subset_eq_empty (Set.inter_subset_inter h2 h2') hd2⟩

end AtomPair
end

end atomPair
open NeighborhoodSystem

end DomainTheory.NeighbourhoodSystems
```

combinedXY812c.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.V
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_8
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    VComputablePresentation
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
```

```
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPair812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XPseq812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    splitSpec812c

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

noncomputable def combinedX (n : ℕ) : Set α :=
  if n % 2 = 0 then X (n / 2) else YPseq D₀ D₁ hD₀nomin hD₁nomin X Y (n / 2)

end AtomPair
end

namespace combinedX
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

omit hD₀pos hD₀diff hD₁pos hD₁diff hXmem hYmem hD₀mne hD₁mne in
theorem even (k : ℕ) : combinedX D₀ D₁ hD₀nomin hD₁nomin X Y (2 * k) = X k := by
  unfold combinedX
  rw [ite_eq_left (by omega : (2 * k) % 2 = 0), show (2 * k) / 2 = k from by omega]

end AtomPair
end
```

```
section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

omit hD₀pos hD₀diff hD₁pos hD₁diff hXmem hYmem hD₀mne hD₁mne in
theorem odd (k : ℕ) :
    combinedX D₀ D₁ hD₀nomin hD₁nomin X Y (2 * k + 1) = YPseq D₀ D₁ hD₀nomin hD₁nomin X
    Y k := by
  unfold combinedX
  rw [ite_eq_right (by omega : ¬ (2 * k + 1) % 2 = 0), show (2 * k + 1) / 2 = k from
    by omega]

end AtomPair
end

end combinedX
namespace subset
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

omit hD₀pos hD₀diff hD₁pos hD₁diff hXmem hYmem hD₀mne hD₁mne in
theorem XPseq {n : ℕ} (?' : Fin n → Bool × Bool) :
    (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n).1
      (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n).2 (X n) true).2 ⊆
      _root_.DomainTheory.NeighbourhoodSystems.XPseq D₀ D₁ hD₀nomin hD₁nomin X Y n :=
  Set.subset_iUnion
    (fun ?' => (xStep D₁ hD₁nomin
      (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n).1
      (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n).2 (X n) true).2) ?'

end AtomPair
end

section
```

```
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

omit hD₀pos hD₀diff hD₁pos hD₁diff hXmem hYmem hD₀mne hD₁mne in
theorem YPseq {n : ℕ} (?' : Fin n → Bool × Bool) (bx : Bool) :
    (yStep D₀ hD₀nomin
        (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n)
    .1
          (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n).2 (X n) bx).1
        (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n)
    .1
          (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n).2 (X n) bx).2
        (Y n) true).1 ⊆ _root_.DomainTheory.NeighbourhoodSystems.YPseq D₀ D₁ hD₀nomin
    hD₁nomin X Y n := by
  intro z hz
  exact Set.mem_iUnion.mpr ⟨?', Set.mem_iUnion.mpr ⟨bx, hz⟩⟩

end AtomPair
end

end subset
namespace XPseq
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem subset_master (n : ℕ) : XPseq D₀ D₁ hD₀nomin hD₁nomin X Y n ⊆ D₁.master := by
  apply Set.iUnion_subset
  intro ?'
  exact (xStep.snd_subset hD₁nomin
    (atomPair.invariant D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem
    hYmem
      hD₀mne hD₁mne (extendTruePair ?') n).1
    (atomPair.invariant D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem
    hYmem
      hD₀mne hD₁mne (extendTruePair ?') n).2.2 (X n) true).trans
```

```
    (atomPair.snd_subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X
    Y hXmem
      hYmem hD₀mne hD₁mne (extendTruePair ?') n)

end AtomPair
end

section
section Iso

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hXcover : ∀ S, D₀.mem S ↔ ∃ n, S = X n) (hYcover : ∀ S, D₁.mem S ↔ ∃ n, S = Y n)
  (hX0 : X 0 = D₀.master) (hY0 : Y 0 = D₁.master)

include hD₀pos hD₀diff hD₁pos hD₁diff hXmem hYmem hD₀mne hD₁mne hX0 in

theorem zero : XPseq D₀ D₁ hD₀nomin hD₁nomin X Y 0 = D₁.master := by
  apply Set.Subset.antisymm
    (XPseq.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem
     hYmem
      hD₀mne hD₁mne 0)
  have hAB1 : D₀.master = ∅ ↔ D₁.master = ∅ :=
    ⟨fun h => absurd h hD₀mne.ne_empty, fun h => absurd h hD₁mne.ne_empty⟩
  have hBE1 : D₁.master = ∅ ∨ D₁.mem D₁.master := Or.inr D₁.master_mem
  have hspec1 := splitChoice'_isSplitSpec D₁ hD₁nomin hAB1 hBE1 (X 0)
  have hdiff1 : D₀.master \ X 0 = ∅ := by rw [hX0]; exact Set.sdiff_self
  have h2empty1 : (splitChoice' D₁ hD₁nomin D₀.master D₁.master (X 0)).2 = ∅ :=
    hspec1.2.2.2.1.mp hdiff1
  have hunion1 := hspec1.2.2.2.2.1
  rw [h2empty1, Set.union_empty] at hunion1
  have hkey : D₁.master ⊆ (xStep D₁ hD₁nomin D₀.master D₁.master (X 0) true).2 := by
    show D₁.master ⊆ (splitChoice' D₁ hD₁nomin D₀.master D₁.master (X 0)).1
    rw [hunion1]
  exact hkey.trans (subset.XPseq D₀ D₁ hD₀nomin hD₁nomin X Y (Fin.elim0 : Fin 0 → Bool
    × Bool))

end Iso
end

end XPseq
open NeighborhoodSystem

end DomainTheory.NeighbourhoodSystems
```

combinedY812c.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.V
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
```

```
    Theorem_8_8
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    VComputablePresentation
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPair812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XPseq812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    splitSpec812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedXY812c

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

noncomputable def combinedY (n : ℕ) : Set β :=
  if n % 2 = 0 then XPseq D₀ D₁ hD₀nomin hD₁nomin X Y (n / 2) else Y (n / 2)

end AtomPair
end

namespace combinedY
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
```

```
include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

omit hD₀pos hD₀diff hD₁pos hD₁diff hXmem hYmem hD₀mne hD₁mne in

theorem even (k : ℕ) :
    combinedY D₀ D₁ hD₀nomin hD₁nomin X Y (2 * k) = XPseq D₀ D₁ hD₀nomin hD₁nomin X Y k
    := by
  unfold combinedY
  rw [ite_eq_left (by omega : (2 * k) % 2 = 0), show (2 * k) / 2 = k from by omega]

omit hD₀pos hD₀diff hD₁pos hD₁diff hXmem hYmem hD₀mne hD₁mne in
theorem odd (k : ℕ) : combinedY D₀ D₁ hD₀nomin hD₁nomin X Y (2 * k + 1) = Y k := by
  unfold combinedY
  rw [ite_eq_right (by omega : ¬ (2 * k + 1) % 2 = 0), show (2 * k + 1) / 2 = k from
    by omega]

end AtomPair
end

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem subset_master (i : ℕ) :
    combinedY D₀ D₁ hD₀nomin hD₁nomin X Y i ⊆ D₁.master := by
  rcases (by omega : i % 2 = 0 ∨ i % 2 = 1) with hi | hi
  · rw [show i = 2 * (i / 2) from by omega, combinedY.even]
    exact XPseq.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
      hD₀mne hD₁mne (i / 2)
  · rw [show i = 2 * (i / 2) + 1 from by omega, combinedY.odd]
    exact D₁.sub_master (hYmem (i / 2))

end AtomPair
end

end combinedY
namespace xStep
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
```

```
     n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem snd_eq_inter_XPseq (? : ℕ → Bool × Bool) (n : ℕ) :
    (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) true).2 =
      (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 ∩ XPseq D₀ D₁ hD₀nomin hD₁nomin X Y n
     := by
  obtain ⟨hAB, -, hBmem⟩ := atomPair.invariant D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁
    diff
    hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne ? n
  set A := (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1 with hAdef
  set B := (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 with hBdef
  set I := (xStep D₁ hD₁nomin A B (X n) true).2 with hIdef
  apply Set.Subset.antisymm
  · have hIsubB : I ⊆ B := xStep.snd_subset hD₁nomin hAB hBmem (X n) true
    have hIsubX : I ⊆ XPseq D₀ D₁ hD₀nomin hD₁nomin X Y n := by
      have hcongr : atomPair D₀ D₁ hD₀nomin hD₁nomin X Y
          (extendTruePair (restrictFinPair ? n)) n =
          atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n :=
        atomPair.congr D₀ D₁ hD₀nomin hD₁nomin X Y
          (fun i hi => extendTruePair_restrictFinPair_agree ? n i hi)
      have hmem := subset.XPseq D₀ D₁ hD₀nomin hD₁nomin X Y (restrictFinPair ? n)
      rwa [hcongr] at hmem
    exact Set.subset_inter hIsubB hIsubX
  · rintro z ⟨hzB, hzX⟩
    obtain ⟨?', hz'⟩ := Set.mem_iUnion.mp hzX
    by_cases hagree : ∀ i < n, extendTruePair ?' i = ? i
    · have hABeq : atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n =
          atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n :=
        atomPair.congr D₀ D₁ hD₀nomin hD₁nomin X Y hagree
      rwa [hABeq] at hz'
    · push Not at hagree
      obtain ⟨j, hj, hjne⟩ := hagree
      have hdisjBB := (atomPair.disjoint D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD
    ₁nomin
        X Y hXmem hYmem hD₀mne hD₁mne (extendTruePair ?') ? n ⟨j, hj, hjne⟩).2
      obtain ⟨hAB', -, hBmem'⟩ := atomPair.invariant D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos
     hD₁diff
        hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne (extendTruePair ?') n
      have hzB' : z ∈ (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n).2 :=
        xStep.snd_subset hD₁nomin hAB' hBmem' (X n) true hz'
      exact absurd (Set.mem_inter hzB' hzB) (by rw [hdisjBB]; simp)

theorem snd_succ_eq (? : ℕ → Bool × Bool) (n : ℕ) (b : Bool) :
    (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) b).2 =
      (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 ∩
        (if b then XPseq D₀ D₁ hD₀nomin hD₁nomin X Y n
          else D₁.master \ XPseq D₀ D₁ hD₀nomin hD₁nomin X Y n) := by
  obtain ⟨hAB, -, hBmem⟩ := atomPair.invariant D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁
    diff
    hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne ? n
```

```
  set A := (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1 with hAdef
  set B := (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 with hBdef
  set XP := XPseq D₀ D₁ hD₀nomin hD₁nomin X Y n with hXPdef
  have hspec := splitChoice'_isSplitSpec D₁ hD₁nomin hAB hBmem (X n)
  have hIeq : (xStep D₁ hD₁nomin A B (X n) true).2 = B ∩ XP :=
    xStep.snd_eq_inter_XPseq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
      hD₀mne hD₁mne ? n
  by_cases hb : b = true
  · rw [hb, ite_eq_left rfl]; exact hIeq
  · rw [Bool.not_eq_true] at hb; subst hb
    rw [ite_eq_right (by simp)]
    have hJeq : (xStep D₁ hD₁nomin A B (X n) false).2 = B \ XP := by
      have hunion : (xStep D₁ hD₁nomin A B (X n) true).2 ∪ (xStep D₁ hD₁nomin A B (X n)
     false).2
           = B := by simp only [xStep, xyStep]; exact hspec.2.2.2.2.1
      have hinter : (xStep D₁ hD₁nomin A B (X n) true).2 ∩ (xStep D₁ hD₁nomin A B (X n)
     false).2
           = ∅ := by simp only [xStep, xyStep]; exact hspec.2.2.2.2.2
      ext x
      constructor
      · intro hxJ
        have hxB : x ∈ B := hunion ▸ Or.inr hxJ
        refine ⟨hxB, fun hxXP => ?_⟩
        have hxI : x ∈ (xStep D₁ hD₁nomin A B (X n) true).2 := hIeq ▸ Set.mem_inter hxB
     hxXP
        exact absurd (Set.mem_inter hxI hxJ) (by rw [hinter]; simp)
      · rintro ⟨hxB, hxnXP⟩
        rw [← hunion] at hxB
        rcases hxB with hxI | hxJ
        · exact absurd (hIeq ▸ hxI : x ∈ B ∩ XP).2 hxnXP
        · exact hxJ
    rw [hJeq]
    have hsub := atomPair.snd_subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff
     hD₁nomin
      X Y hXmem hYmem hD₀mne hD₁mne ? n
    ext x
    constructor
    · rintro ⟨hx1, hx2⟩; exact ⟨hx1, hsub hx1, hx2⟩
    · rintro ⟨hx1, -, hx2⟩; exact ⟨hx1, hx2⟩
end AtomPair
end

end xStep
namespace genAtom
open NeighborhoodSystem

theorem succ' {? : Type*} (Z : ℕ → Set ?) (M : Set ?) (? : ℕ → Bool) (n : ℕ) :
    genAtom Z M ? (n + 1) = genAtom Z M ? n ∩ (if ? n then Z n else M \ Z n) := rfl

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
```

```
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem combinedX_succ_eq (? : ℕ → Bool × Bool) (n : ℕ)
    (hn : (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1 =
      genAtom (combinedX D₀ D₁ hD₀nomin hD₁nomin X Y) D₀.master (combined? ?) (2 * n)) :
    genAtom (combinedX D₀ D₁ hD₀nomin hD₁nomin X Y) D₀.master (combined? ?) (2 * n + 1)
    =
      (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).1 := by
  rw [genAtom.succ', ← hn, combined?_even, combinedX.even]
  have hAsub : (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1 ⊆ D₀.master :=
    atomPair.fst_subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
     hXmem
      hYmem hD₀mne hD₁mne ? n
  simp only [xStep, xyStep]
  rcases Bool.eq_false_or_eq_true (? n).1 with hb | hb
  · simp only [hb, ite_true]
  · simp only [hb, Bool.false_eq_true, ite_false]
    exact inter.diff_eq_diff_of_subset hAsub

theorem combinedY_succ_eq (? : ℕ → Bool × Bool) (n : ℕ)
    (hn : (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 =
      genAtom (combinedY D₀ D₁ hD₀nomin hD₁nomin X Y) D₁.master (combined? ?) (2 * n)) :
    genAtom (combinedY D₀ D₁ hD₀nomin hD₁nomin X Y) D₁.master (combined? ?) (2 * n + 1)
    =
      (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
        (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).2 := by
  rw [genAtom.succ', ← hn, combined?_even, combinedY.even]
  exact (xStep.snd_succ_eq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
    hD₀mne hD₁mne ? n (? n).1).symm
end AtomPair
end

end genAtom
namespace yStep
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne
```

```
theorem fst_eq_inter_YPseq (? : ℕ → Bool × Bool) (n : ℕ) :
    (yStep D₀ hD₀nomin
        (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
          (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).1
        (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
          (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).2
        (Y n) true).1 =
      (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
          (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).1 ∩
        YPseq D₀ D₁ hD₀nomin hD₁nomin X Y n := by
  obtain ⟨hBA, hAmem⟩ := xStep.spec_bit D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁
    nomin
    X Y hXmem hYmem hD₀mne hD₁mne ? n (? n).1
  set A1 := (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
    (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).1 with hA1def
  set B1 := (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
    (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).2 with hB1def
  set J := (yStep D₀ hD₀nomin A1 B1 (Y n) true).1 with hJdef
  apply Set.Subset.antisymm
  · have hJsubA1 : J ⊆ A1 := yStep.fst_subset hD₀nomin hBA hAmem (Y n) true
    have hJsubY : J ⊆ YPseq D₀ D₁ hD₀nomin hD₁nomin X Y n := by
      have hcongr : atomPair D₀ D₁ hD₀nomin hD₁nomin X Y
          (extendTruePair (restrictFinPair ? n)) n =
          atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n :=
        atomPair.congr D₀ D₁ hD₀nomin hD₁nomin X Y
          (fun i hi => extendTruePair_restrictFinPair_agree ? n i hi)
      have hmem := subset.YPseq D₀ D₁ hD₀nomin hD₁nomin X Y (restrictFinPair ? n) (? n)
    .1
      rwa [hcongr] at hmem
    exact Set.subset_inter hJsubA1 hJsubY
  · rintro z ⟨hzA1, hzY⟩
    obtain ⟨?', hz'⟩ := Set.mem_iUnion.mp hzY
    obtain ⟨bx, hz''⟩ := Set.mem_iUnion.mp hz'
    by_cases hagree : ∀ i < n, extendTruePair ?' i = ? i
    · have hABeq : atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n =
          atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n :=
        atomPair.congr D₀ D₁ hD₀nomin hD₁nomin X Y hagree
      by_cases hbxeq : bx = (? n).1
      · rw [hABeq, hbxeq] at hz''
        exact hz''
      · obtain ⟨hAB, -, hBmem⟩ := atomPair.invariant D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos
     hD₁diff
          hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne ? n
        have hxdisj := xStep.disjoint_of_ne hD₁nomin hAB hBmem (X n) hbxeq
        rw [hABeq] at hz''
        have hzA1' : z ∈ (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
            (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) bx).1 := by
          obtain ⟨hBA', hAmem'⟩ := xStep.spec_bit D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD
    ₁diff
            hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne ? n bx
          exact yStep.fst_subset hD₀nomin hBA' hAmem' (Y n) true hz''
        exact absurd (Set.mem_inter hzA1' hzA1) (by rw [hxdisj.1]; simp)
    · push Not at hagree
      obtain ⟨j, hj, hjne⟩ := hagree
      have hdisjAA := (atomPair.disjoint D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD
    ₁nomin
```

```
        X Y hXmem hYmem hD₀mne hD₁mne (extendTruePair ?') ? n ⟨j, hj, hjne⟩).1
      have hzA1' : z ∈ (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y (extendTruePair ?') n).1
    := by
        obtain ⟨hBA', hAmem'⟩ := xStep.spec_bit D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁
    diff
          hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne (extendTruePair ?') n bx
        have hJ'subA1' := yStep.fst_subset hD₀nomin hBA' hAmem' (Y n) true hz''
        exact xStep.fst_subset D₁ hD₁nomin _ _ (X n) bx hJ'subA1'
      have hzAfull : z ∈ (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1 :=
        xStep.fst_subset D₁ hD₁nomin _ _ (X n) (? n).1 hzA1
      exact absurd (Set.mem_inter hzA1' hzAfull) (by rw [hdisjAA]; simp)

theorem fst_succ_eq (? : ℕ → Bool × Bool) (n : ℕ) (b : Bool) :
    (yStep D₀ hD₀nomin
        (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
          (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).1
        (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
          (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).2
        (Y n) b).1 =
      (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
          (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).1 ∩
        (if b then YPseq D₀ D₁ hD₀nomin hD₁nomin X Y n
          else D₀.master \ YPseq D₀ D₁ hD₀nomin hD₁nomin X Y n) := by
  obtain ⟨hBA, hAmem⟩ := xStep.spec D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin
     X Y hXmem
    hYmem hD₀mne hD₁mne ? n
  set A1 := (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
    (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).1 with hA1def
  set B1 := (xStep D₁ hD₁nomin (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1
    (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 (X n) (? n).1).2 with hB1def
  set YP := YPseq D₀ D₁ hD₀nomin hD₁nomin X Y n with hYPdef
  have hspec := splitChoice'_isSplitSpec D₀ hD₀nomin hBA hAmem (Y n)
  have hJeqTrue : (yStep D₀ hD₀nomin A1 B1 (Y n) true).1 = A1 ∩ YP :=
    yStep.fst_eq_inter_YPseq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
      hD₀mne hD₁mne ? n
  by_cases hb : b = true
  · rw [hb, ite_eq_left rfl]; exact hJeqTrue
  · rw [Bool.not_eq_true] at hb; subst hb
    rw [ite_eq_right (by simp)]
    have hJeq : (yStep D₀ hD₀nomin A1 B1 (Y n) false).1 = A1 \ YP := by
      have hunion : (yStep D₀ hD₀nomin A1 B1 (Y n) true).1 ∪ (yStep D₀ hD₀nomin A1 B1 (
    Y n) false).1
          = A1 := by simp only [yStep, xyStep, Prod.swap]; exact hspec.2.2.2.2.1
      have hinter : (yStep D₀ hD₀nomin A1 B1 (Y n) true).1 ∩ (yStep D₀ hD₀nomin A1 B1 (
    Y n) false).1
          = ∅ := by simp only [yStep, xyStep, Prod.swap]; exact hspec.2.2.2.2.2
      ext x
      constructor
      · intro hxJ
        have hxA1 : x ∈ A1 := hunion ▶ Or.inr hxJ
        refine ⟨hxA1, fun hxYP => ?_⟩
        have hxI : x ∈ (yStep D₀ hD₀nomin A1 B1 (Y n) true).1 := hJeqTrue ▶ Set.
    mem_inter hxA1 hxYP
        exact absurd (Set.mem_inter hxI hxJ) (by rw [hinter]; simp)
      · rintro ⟨hxA1, hxnYP⟩
```

```
        rw [← hunion] at hxA1
        rcases hxA1 with hxI | hxJ
        · exact absurd (hJeqTrue ▶ hxI : x ∈ A1 ∩ YP).2 hxnYP
        · exact hxJ
    rw [hJeq]
    have hsub : A1 ⊆ D₀.master := (xStep.fst_subset D₁ hD₁nomin _ _ (X n) (? n).1).
    trans
      (atomPair.fst_subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin
    X Y hXmem
        hYmem hD₀mne hD₁mne ? n)
    ext x
    constructor
    · rintro ⟨hx1, hx2⟩; exact ⟨hx1, hsub hx1, hx2⟩
    · rintro ⟨hx1, -, hx2⟩; exact ⟨hx1, hx2⟩
end AtomPair
end

end yStep
namespace atomPair
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem snd_eq_genAtom (? : ℕ → Bool × Bool) (n : ℕ) :
    (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).2 =
      genAtom (combinedY D₀ D₁ hD₀nomin hD₁nomin X Y) D₁.master (combined? ?) (2 * n) :=
     by
  induction n with
  | zero => rfl
  | succ n hIH =>
      have hodd := genAtom.combinedY_succ_eq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁
    diff hD₁nomin
        X Y hXmem hYmem hD₀mne hD₁mne ? n hIH
      have h2 : 2 * (n + 1) = 2 * n + 1 + 1 := by ring
      rw [atomPair.succ_eq, h2, genAtom.succ', combined?_odd, combinedY.odd, hodd]
      obtain ⟨hAB, -, hBmem⟩ := atomPair.invariant D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos
    hD₁diff
        hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne ? n
      have hB1sub := (xStep.snd_subset hD₁nomin hAB hBmem (X n) (? n).1).trans
        (atomPair.snd_subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁
    nomin X Y hXmem
          hYmem hD₀mne hD₁mne ? n)

      simp only [yStep, xyStep, Prod.swap]
      rcases Bool.eq_false_or_eq_true (? n).2 with hb | hb
```

```
      · simp only [hb, ite_true]
      · simp only [hb, Bool.false_eq_true, ite_false]
        exact (inter.diff_eq_diff_of_subset hB1sub).symm

theorem fst_eq_genAtom (? : ℕ → Bool × Bool) (n : ℕ) :
    (atomPair D₀ D₁ hD₀nomin hD₁nomin X Y ? n).1 =
      genAtom (combinedX D₀ D₁ hD₀nomin hD₁nomin X Y) D₀.master (combined? ?) (2 * n) :=
     by
  induction n with
  | zero => rfl
  | succ n hIH =>
      have hodd := genAtom.combinedX_succ_eq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁
    diff hD₁nomin
        X Y hXmem hYmem hD₀mne hD₁mne ? n hIH
      have hstep := yStep.fst_succ_eq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁
    nomin X Y
        hXmem hYmem hD₀mne hD₁mne ? n (? n).2
      have h2 : 2 * (n + 1) = 2 * n + 1 + 1 := by ring
      rw [atomPair.succ_eq, hstep, h2, genAtom.succ', combined?_odd, combinedX.odd,
    hodd]
end AtomPair
end

end atomPair

end DomainTheory.NeighbourhoodSystems
```

hcore812c.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.V
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_8
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    VComputablePresentation
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPair812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    splitSpec812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedXY812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedY812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XPseq812c

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
```

```
open NeighborhoodSystem

open NeighborhoodSystem

namespace hcore
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem even (?' : ℕ → Bool) (n : ℕ) :
    genAtom (combinedX D₀ D₁ hD₀nomin hD₁nomin X Y) D₀.master ?' (2 * n) = ∅ ↔
      genAtom (combinedY D₀ D₁ hD₀nomin hD₁nomin X Y) D₁.master ?' (2 * n) = ∅ := by
  rw [← combined?_deinterleave? ?',
    ← atomPair.fst_eq_genAtom D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem
      hYmem hD₀mne hD₁mne (deinterleave? ?') n,
    ← atomPair.snd_eq_genAtom D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem
      hYmem hD₀mne hD₁mne (deinterleave? ?') n]
  exact (atomPair.invariant D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
    hD₀mne hD₁mne (deinterleave? ?') n).1

end AtomPair
end

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem odd (?' : ℕ → Bool) (n : ℕ) :
    genAtom (combinedX D₀ D₁ hD₀nomin hD₁nomin X Y) D₀.master ?' (2 * n + 1) = ∅ ↔
      genAtom (combinedY D₀ D₁ hD₀nomin hD₁nomin X Y) D₁.master ?' (2 * n + 1) = ∅ := by
  rw [← combined?_deinterleave? ?',
    genAtom.combinedX_succ_eq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem
```

```
      hYmem hD₀mne hD₁mne (deinterleave? ?') n
      (atomPair.fst_eq_genAtom D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
     hXmem
        hYmem hD₀mne hD₁mne (deinterleave? ?') n),
    genAtom.combinedY_succ_eq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem
      hYmem hD₀mne hD₁mne (deinterleave? ?') n
      (atomPair.snd_eq_genAtom D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
     hXmem
        hYmem hD₀mne hD₁mne (deinterleave? ?') n)]
  exact (xStep.spec_bit D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem
    hYmem
    hD₀mne hD₁mne (deinterleave? ?') n ((deinterleave? ?') n).1).1.symm

end AtomPair
end

end hcore
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem hcore (?' : ℕ → Bool) (n : ℕ) :
    genAtom (combinedX D₀ D₁ hD₀nomin hD₁nomin X Y) D₀.master ?' n = ∅ ↔
      genAtom (combinedY D₀ D₁ hD₀nomin hD₁nomin X Y) D₁.master ?' n = ∅ := by
  rcases (by omega : n % 2 = 0 ∨ n % 2 = 1) with hn | hn
  · rw [show n = 2 * (n / 2) from by omega]
    exact hcore.even D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem
    hYmem hD₀mne
      hD₁mne ?' (n / 2)
  · rw [show n = 2 * (n / 2) + 1 from by omega]
    exact hcore.odd D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem
    hYmem hD₀mne
      hD₁mne ?' (n / 2)

end AtomPair
end

end DomainTheory.NeighbourhoodSystems
```

transfer812c.lean

```
module
```

```
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.V
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_8
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    VComputablePresentation
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPair812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    splitSpec812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedXY812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedY812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XPseq812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.hcore812c

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

namespace transfer
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem empty_combined {cs : List (ℕ × Bool)} {n : ℕ} (hn : ∀ p ∈ cs, p.1 < n) :
    {x ∈ D₀.master | ∀ p ∈ cs, (p.2 = true ↔ x ∈ combinedX D₀ D₁ hD₀nomin hD₁nomin X Y
    p.1)}.Nonempty ↔
      {y ∈ D₁.master |
        ∀ p ∈ cs, (p.2 = true ↔ y ∈ combinedY D₀ D₁ hD₀nomin hD₁nomin X Y p.1)}.
    Nonempty := by
  have hc := hcore D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem hYmem
    hD₀mne
    hD₁mne
  have hc' : ∀ ? n, genAtom (combinedY D₀ D₁ hD₀nomin hD₁nomin X Y) D₁.master ? n = ∅ ↔
      genAtom (combinedX D₀ D₁ hD₀nomin hD₁nomin X Y) D₀.master ? n = ∅ :=
    fun ? n => (hc ? n).symm
```

```
  exact ⟨transfer_dir (combinedX D₀ D₁ hD₀nomin hD₁nomin X Y) D₀.master
      (combinedY D₀ D₁ hD₀nomin hD₁nomin X Y) D₁.master hc hn,
    transfer_dir (combinedY D₀ D₁ hD₀nomin hD₁nomin X Y) D₁.master
      (combinedX D₀ D₁ hD₀nomin hD₁nomin X Y) D₀.master hc' hn⟩

theorem double_subset_combined (i j k : ℕ) :
    D₀.master ∩ combinedX D₀ D₁ hD₀nomin hD₁nomin X Y i ∩ combinedX D₀ D₁ hD₀nomin hD₁
    nomin X Y j ⊆
        combinedX D₀ D₁ hD₀nomin hD₁nomin X Y k ↔
      D₁.master ∩ combinedY D₀ D₁ hD₀nomin hD₁nomin X Y i ∩
          combinedY D₀ D₁ hD₀nomin hD₁nomin X Y j ⊆ combinedY D₀ D₁ hD₀nomin hD₁nomin X
    Y k := by
  have key := transfer.empty_combined D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁
    nomin X Y
    hXmem hYmem hD₀mne hD₁mne (cs := [(i, true), (j, true), (k, false)])
    (n := max i (max j k) + 1)
    (by simp only [List.mem_cons, List.not_mem_nil, or_false]
        rintro p (rfl | rfl | rfl) <;>
          simp [(Nat.le_max_left j k).trans (Nat.le_max_right i (max j k)),
            (Nat.le_max_right j k).trans (Nat.le_max_right i (max j k))])
  have hLHS : {x ∈ D₀.master | ∀ p ∈ [(i, true), (j, true), (k, false)],
      (p.2 = true ↔ x ∈ combinedX D₀ D₁ hD₀nomin hD₁nomin X Y p.1)}
      = (D₀.master ∩ combinedX D₀ D₁ hD₀nomin hD₁nomin X Y i ∩
          combinedX D₀ D₁ hD₀nomin hD₁nomin X Y j) \ combinedX D₀ D₁ hD₀nomin hD₁nomin X
     Y k := by
    ext x
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_sdiff, Set.mem_inter_iff]
    tauto
  have hRHS : {y ∈ D₁.master | ∀ p ∈ [(i, true), (j, true), (k, false)],
      (p.2 = true ↔ y ∈ combinedY D₀ D₁ hD₀nomin hD₁nomin X Y p.1)}
      = (D₁.master ∩ combinedY D₀ D₁ hD₀nomin hD₁nomin X Y i ∩
          combinedY D₀ D₁ hD₀nomin hD₁nomin X Y j) \ combinedY D₀ D₁ hD₀nomin hD₁nomin X
     Y k := by
    ext y
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_sdiff, Set.mem_inter_iff]
    tauto
  rw [hLHS, hRHS] at key
  rw [← Set.sdiff_eq_empty, ← Set.sdiff_eq_empty, ← Set.not_nonempty_iff_eq_empty,
    ← Set.not_nonempty_iff_eq_empty, not_iff_not]
  exact key

theorem inter_empty_combined (i j : ℕ) :
    D₀.master ∩ combinedX D₀ D₁ hD₀nomin hD₁nomin X Y i ∩ combinedX D₀ D₁ hD₀nomin hD₁
    nomin X Y j =
        ∅ ↔
      D₁.master ∩ combinedY D₀ D₁ hD₀nomin hD₁nomin X Y i ∩
          combinedY D₀ D₁ hD₀nomin hD₁nomin X Y j = ∅ := by
  have key := transfer.empty_combined D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁
    nomin X Y
    hXmem hYmem hD₀mne hD₁mne (cs := [(i, true), (j, true)]) (n := max i j + 1)
    (by simp only [List.mem_cons, List.not_mem_nil, or_false]
        rintro p (rfl | rfl) <;> simp)
  have hLHS : {x ∈ D₀.master |
      ∀ p ∈ [(i, true), (j, true)], (p.2 = true ↔ x ∈ combinedX D₀ D₁ hD₀nomin hD₁nomin
```

```
     X Y p.1)}
      = D₀.master ∩ combinedX D₀ D₁ hD₀nomin hD₁nomin X Y i ∩
          combinedX D₀ D₁ hD₀nomin hD₁nomin X Y j := by
    ext x
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_inter_iff]
    tauto
  have hRHS : {y ∈ D₁.master |
      ∀ p ∈ [(i, true), (j, true)], (p.2 = true ↔ y ∈ combinedY D₀ D₁ hD₀nomin hD₁nomin
     X Y p.1)}
      = D₁.master ∩ combinedY D₀ D₁ hD₀nomin hD₁nomin X Y i ∩
          combinedY D₀ D₁ hD₀nomin hD₁nomin X Y j := by
    ext y
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_inter_iff]
    tauto
  rw [hLHS, hRHS] at key
  rw [← Set.not_nonempty_iff_eq_empty, ← Set.not_nonempty_iff_eq_empty, not_iff_not]
  exact key

theorem subset_combined (i j : ℕ) :
    D₀.master ∩ combinedX D₀ D₁ hD₀nomin hD₁nomin X Y i ⊆ combinedX D₀ D₁ hD₀nomin hD₁
    nomin X Y j ↔
      D₁.master ∩ combinedY D₀ D₁ hD₀nomin hD₁nomin X Y i ⊆
        combinedY D₀ D₁ hD₀nomin hD₁nomin X Y j := by
  have key := transfer.empty_combined D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁
    nomin X Y
    hXmem hYmem hD₀mne hD₁mne (cs := [(i, true), (j, false)]) (n := max i j + 1)
    (by simp only [List.mem_cons, List.not_mem_nil, or_false]
        rintro p (rfl | rfl) <;> simp)
  have hLHS : {x ∈ D₀.master |
      ∀ p ∈ [(i, true), (j, false)], (p.2 = true ↔ x ∈ combinedX D₀ D₁ hD₀nomin hD₁
    nomin X Y p.1)}
      = (D₀.master ∩ combinedX D₀ D₁ hD₀nomin hD₁nomin X Y i) \
        combinedX D₀ D₁ hD₀nomin hD₁nomin X Y j := by
    ext x
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_sdiff, Set.mem_inter_iff]
    tauto
  have hRHS : {y ∈ D₁.master |
      ∀ p ∈ [(i, true), (j, false)], (p.2 = true ↔ y ∈ combinedY D₀ D₁ hD₀nomin hD₁
    nomin X Y p.1)}
      = (D₁.master ∩ combinedY D₀ D₁ hD₀nomin hD₁nomin X Y i) \
        combinedY D₀ D₁ hD₀nomin hD₁nomin X Y j := by
    ext y
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_sdiff, Set.mem_inter_iff]
    tauto
  rw [hLHS, hRHS] at key
  rw [← Set.sdiff_eq_empty, ← Set.sdiff_eq_empty, ← Set.not_nonempty_iff_eq_empty,
    ← Set.not_nonempty_iff_eq_empty, not_iff_not]
  exact key

theorem inter_eq_combined (i j k : ℕ)
    (hi : combinedX D₀ D₁ hD₀nomin hD₁nomin X Y i ⊆ D₀.master)
    (hk : combinedX D₀ D₁ hD₀nomin hD₁nomin X Y k ⊆ D₀.master) :
```

```
  combinedX D₀ D₁ hD₀nomin hD₁nomin X Y i ∩ combinedX D₀ D₁ hD₀nomin hD₁nomin X Y j =
      combinedX D₀ D₁ hD₀nomin hD₁nomin X Y k ↔
    combinedY D₀ D₁ hD₀nomin hD₁nomin X Y i ∩ combinedY D₀ D₁ hD₀nomin hD₁nomin X Y j
  =
      combinedY D₀ D₁ hD₀nomin hD₁nomin X Y k := by
have h1 : combinedX D₀ D₁ hD₀nomin hD₁nomin X Y k ⊆ combinedX D₀ D₁ hD₀nomin hD₁nomin
  X Y i ↔
    combinedY D₀ D₁ hD₀nomin hD₁nomin X Y k ⊆ combinedY D₀ D₁ hD₀nomin hD₁nomin X Y i
  := by
  have := transfer.subset_combined D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁
  nomin X Y
    hXmem hYmem hD₀mne hD₁mne k i
  rwa [Set.inter_eq_self_of_subset_right hk,
    Set.inter_eq_self_of_subset_right
      (combinedY.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X
   Y hXmem
        hYmem hD₀mne hD₁mne k)] at this
have h2 : combinedX D₀ D₁ hD₀nomin hD₁nomin X Y k ⊆ combinedX D₀ D₁ hD₀nomin hD₁nomin
  X Y j ↔
    combinedY D₀ D₁ hD₀nomin hD₁nomin X Y k ⊆ combinedY D₀ D₁ hD₀nomin hD₁nomin X Y j
  := by
  have := transfer.subset_combined D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁
  nomin X Y
    hXmem hYmem hD₀mne hD₁mne k j
  rwa [Set.inter_eq_self_of_subset_right hk,
    Set.inter_eq_self_of_subset_right
      (combinedY.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X
   Y hXmem
        hYmem hD₀mne hD₁mne k)] at this
have h3 : combinedX D₀ D₁ hD₀nomin hD₁nomin X Y i ∩ combinedX D₀ D₁ hD₀nomin hD₁nomin
  X Y j ⊆
      combinedX D₀ D₁ hD₀nomin hD₁nomin X Y k ↔
    combinedY D₀ D₁ hD₀nomin hD₁nomin X Y i ∩ combinedY D₀ D₁ hD₀nomin hD₁nomin X Y j
  ⊆
      combinedY D₀ D₁ hD₀nomin hD₁nomin X Y k := by
  have := transfer.double_subset_combined D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff
   hD₁nomin
    X Y hXmem hYmem hD₀mne hD₁mne i j k
  rwa [Set.inter_eq_self_of_subset_right hi,
    Set.inter_eq_self_of_subset_right
      (combinedY.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X
   Y hXmem
        hYmem hD₀mne hD₁mne i)] at this
constructor
· intro heq
  have hki : combinedX D₀ D₁ hD₀nomin hD₁nomin X Y k ⊆ combinedX D₀ D₁ hD₀nomin hD₁
  nomin X Y i :=
    heq ▶ Set.inter_subset_left
  have hkj : combinedX D₀ D₁ hD₀nomin hD₁nomin X Y k ⊆ combinedX D₀ D₁ hD₀nomin hD₁
  nomin X Y j :=
    heq ▶ Set.inter_subset_right
  have hijk : combinedX D₀ D₁ hD₀nomin hD₁nomin X Y i ∩ combinedX D₀ D₁ hD₀nomin hD₁
  nomin X Y j ⊆
      combinedX D₀ D₁ hD₀nomin hD₁nomin X Y k := heq ▶ subset_rfl
  exact Set.Subset.antisymm (h3.mp hijk) (Set.subset_inter (h1.mp hki) (h2.mp hkj))
· intro heq
```

```
    have hki : combinedY D₀ D₁ hD₀nomin hD₁nomin X Y k ⊆ combinedY D₀ D₁ hD₀nomin hD₁
    nomin X Y i :=
      heq ▸ Set.inter_subset_left
    have hkj : combinedY D₀ D₁ hD₀nomin hD₁nomin X Y k ⊆ combinedY D₀ D₁ hD₀nomin hD₁
    nomin X Y j :=
      heq ▸ Set.inter_subset_right
    have hijk : combinedY D₀ D₁ hD₀nomin hD₁nomin X Y i ∩ combinedY D₀ D₁ hD₀nomin hD₁
    nomin X Y j ⊆
        combinedY D₀ D₁ hD₀nomin hD₁nomin X Y k := heq ▸ subset_rfl
    exact Set.Subset.antisymm (h3.mpr hijk) (Set.subset_inter (h1.mpr hki) (h2.mpr hkj
    ))
end AtomPair
end

end transfer
namespace YPseq
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem subset_master (n : ℕ) : YPseq D₀ D₁ hD₀nomin hD₁nomin X Y n ⊆ D₀.master := by
  apply Set.iUnion_subset
  intro ?'
  apply Set.iUnion_subset
  intro bx
  obtain ⟨hBA, hAmem⟩ := xStep.spec_bit D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁
    nomin X Y
    hXmem hYmem hD₀mne hD₁mne (extendTruePair ?') n bx
  exact (yStep.fst_subset hD₀nomin hBA hAmem (Y n) true).trans
    ((xStep.fst_subset D₁ hD₁nomin _ _ (X n) bx).trans
      (atomPair.fst_subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin
    X Y hXmem
        hYmem hD₀mne hD₁mne (extendTruePair ?') n))

end AtomPair
end

section
section Iso

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))
```

```
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hXcover : ∀ S, D₀.mem S ↔ ∃ n, S = X n) (hYcover : ∀ S, D₁.mem S ↔ ∃ n, S = Y n)
  (hX0 : X 0 = D₀.master) (hY0 : Y 0 = D₁.master)

include hD₀pos hD₀diff hD₁pos hD₁diff hXmem hYmem hD₀mne hD₁mne hX0 hY0 in

theorem zero : YPseq D₀ D₁ hD₀nomin hD₁nomin X Y 0 = D₀.master := by
  apply Set.Subset.antisymm
    (YPseq.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem
     hYmem
      hD₀mne hD₁mne 0)
  have hAB1 : D₀.master = ∅ ↔ D₁.master = ∅ :=
    ⟨fun h => absurd h hD₀mne.ne_empty, fun h => absurd h hD₁mne.ne_empty⟩
  have hBE1 : D₁.master = ∅ ∨ D₁.mem D₁.master := Or.inr D₁.master_mem
  have hspec1 := splitChoice'_isSplitSpec D₁ hD₁nomin hAB1 hBE1 (X 0)
  have hdiff1 : D₀.master \ X 0 = ∅ := by rw [hX0]; exact Set.sdiff_self
  have h2empty1 : (splitChoice' D₁ hD₁nomin D₀.master D₁.master (X 0)).2 = ∅ :=
    hspec1.2.2.2.1.mp hdiff1
  have hunion1 := hspec1.2.2.2.2.1
  rw [h2empty1, Set.union_empty] at hunion1
  have hAB2 : D₁.master = ∅ ↔ D₀.master = ∅ := hAB1.symm
  have hBE2 : D₀.master = ∅ ∨ D₀.mem D₀.master := Or.inr D₀.master_mem
  have hspec2 := splitChoice'_isSplitSpec D₀ hD₀nomin hAB2 hBE2 (Y 0)
  have hdiff2 : D₁.master \ Y 0 = ∅ := by rw [hY0]; exact Set.sdiff_self
  have h2empty2 : (splitChoice' D₀ hD₀nomin D₁.master D₀.master (Y 0)).2 = ∅ :=
    hspec2.2.2.2.1.mp hdiff2
  have hunion2 := hspec2.2.2.2.2.1
  rw [h2empty2, Set.union_empty] at hunion2
  have hgoal : (yStep D₀ hD₀nomin (D₀.master ∩ X 0)
      (splitChoice' D₁ hD₁nomin D₀.master D₁.master (X 0)).1 (Y 0) true).1 ⊆
      YPseq D₀ D₁ hD₀nomin hD₁nomin X Y 0 :=
    subset.YPseq D₀ D₁ hD₀nomin hD₁nomin X Y (Fin.elim0 : Fin 0 → Bool × Bool) true
  rw [hunion1, hX0, Set.inter_self] at hgoal
  have hkey2 : D₀.master ⊆ (yStep D₀ hD₀nomin D₀.master D₁.master (Y 0) true).1 := by
    show D₀.master ⊆ (splitChoice' D₀ hD₀nomin D₁.master D₀.master (Y 0)).1
    rw [hunion2]
  exact hkey2.trans hgoal

end Iso
end

section
section Iso

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hXcover : ∀ S, D₀.mem S ↔ ∃ n, S = X n) (hYcover : ∀ S, D₁.mem S ↔ ∃ n, S = Y n)
  (hX0 : X 0 = D₀.master) (hY0 : Y 0 = D₁.master)

include hD₀pos hD₀diff hD₁pos hD₁diff hXmem hYmem hD₀mne hD₁mne in

theorem subset_X_iff_Y_subset_XPseq (i j : ℕ) :
```

```
    YPseq D₀ D₁ hD₀nomin hD₁nomin X Y i ⊆ X j ↔
      Y i ⊆ XPseq D₀ D₁ hD₀nomin hD₁nomin X Y j := by
  have key := transfer.subset_combined D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁
    nomin X Y
    hXmem hYmem hD₀mne hD₁mne (2 * i + 1) (2 * j)
  rw [combinedX.odd, combinedX.even, combinedY.odd, combinedY.even,
    Set.inter_eq_self_of_subset_right
      (YPseq.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
        hD₀mne hD₁mne i),
    Set.inter_eq_self_of_subset_right (D₁.sub_master (hYmem i))] at key
  exact key

end Iso
end

end YPseq
open NeighborhoodSystem

section
section Iso

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hXcover : ∀ S, D₀.mem S ↔ ∃ n, S = X n) (hYcover : ∀ S, D₁.mem S ↔ ∃ n, S = Y n)
  (hX0 : X 0 = D₀.master) (hY0 : Y 0 = D₁.master)

include hD₀pos hD₀diff hD₁pos hD₁diff hXmem hYmem hD₀mne hD₁mne in

theorem X_subset_YPseq_iff_XPseq_subset_Y (i j : ℕ) :
    X i ⊆ YPseq D₀ D₁ hD₀nomin hD₁nomin X Y j ↔
      XPseq D₀ D₁ hD₀nomin hD₁nomin X Y i ⊆ Y j := by
  have key := transfer.subset_combined D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁
    nomin X Y
    hXmem hYmem hD₀mne hD₁mne (2 * i) (2 * j + 1)
  rw [combinedX.even, combinedX.odd, combinedY.even, combinedY.odd,
    Set.inter_eq_self_of_subset_right (D₀.sub_master (hXmem i)),
    Set.inter_eq_self_of_subset_right
      (XPseq.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
        hD₀mne hD₁mne i)] at key
  exact key

end Iso
end

namespace XPseq
open NeighborhoodSystem

section
section Iso
```

```
variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hXcover : ∀ S, D₀.mem S ↔ ∃ n, S = X n) (hYcover : ∀ S, D₁.mem S ↔ ∃ n, S = Y n)
  (hX0 : X 0 = D₀.master) (hY0 : Y 0 = D₁.master)

include hD₀pos hD₀diff hD₁pos hD₁diff hXmem hYmem hD₀mne hD₁mne in

theorem eq_Y_iff_X_eq_YPseq (j k : ℕ) :
    XPseq D₀ D₁ hD₀nomin hD₁nomin X Y j = Y k ↔ X j = YPseq D₀ D₁ hD₀nomin hD₁nomin X Y
    k := by
  constructor
  · intro h
    exact Set.Subset.antisymm
      ((X_subset_YPseq_iff_XPseq_subset_Y D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff
    hD₁nomin X Y
        hXmem hYmem hD₀mne hD₁mne j k).mpr h.subset)
      ((YPseq.subset_X_iff_Y_subset_XPseq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff
    hD₁nomin X Y
        hXmem hYmem hD₀mne hD₁mne k j).mpr h.symm.subset)
  · intro h
    exact Set.Subset.antisymm
      ((X_subset_YPseq_iff_XPseq_subset_Y D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff
    hD₁nomin X Y
        hXmem hYmem hD₀mne hD₁mne j k).mp h.subset)
      ((YPseq.subset_X_iff_Y_subset_XPseq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff
    hD₁nomin X Y
        hXmem hYmem hD₀mne hD₁mne k j).mp h.symm.subset)

end Iso
end

end XPseq
namespace combinedX
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem subset_master (i : ℕ) :
    combinedX D₀ D₁ hD₀nomin hD₁nomin X Y i ⊆ D₀.master := by
  rcases (by omega : i % 2 = 0 ∨ i % 2 = 1) with hi | hi
  · rw [show i = 2 * (i / 2) from by omega, combinedX.even]
```

```
    exact D₀.sub_master (hXmem (i / 2))
  · rw [show i = 2 * (i / 2) + 1 from by omega, combinedX.odd]
    exact YPseq.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
      hD₀mne hD₁mne (i / 2)

end AtomPair
end

end combinedX
namespace YPseq
open NeighborhoodSystem

section

section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem inter_eq_iff_Y_inter_eq (i j k : ℕ) :
    YPseq D₀ D₁ hD₀nomin hD₁nomin X Y i ∩ YPseq D₀ D₁ hD₀nomin hD₁nomin X Y j =
        YPseq D₀ D₁ hD₀nomin hD₁nomin X Y k ↔
      Y i ∩ Y j = Y k := by
  have key := transfer.inter_eq_combined D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD
    ₁nomin X Y
    hXmem hYmem hD₀mne hD₁mne (2 * i + 1) (2 * j + 1) (2 * k + 1)
    (combinedX.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
      hD₀mne hD₁mne (2 * i + 1))
    (combinedX.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
      hD₀mne hD₁mne (2 * k + 1))
  rw [combinedX.odd, combinedX.odd, combinedX.odd, combinedY.odd, combinedY.odd,
    combinedY.odd] at key
  exact key

end AtomPair
end

end YPseq

end DomainTheory.NeighbourhoodSystems
```

transfer812c_more.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.V
```

```
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_8
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    VComputablePresentation
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPair812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    splitSpec812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedXY812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedY812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XPseq812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.hcore812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    transfer812c

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

open NeighborhoodSystem

namespace XPseq
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem X_inter_empty_iff_XPseq_inter_empty (i j : ℕ) :
    X i ∩ X j = ∅ ↔
      XPseq D₀ D₁ hD₀nomin hD₁nomin X Y i ∩ XPseq D₀ D₁ hD₀nomin hD₁nomin X Y j = ∅ :=
    by
  have key := transfer.inter_empty_combined D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff
    hD₁nomin
    X Y hXmem hYmem hD₀mne hD₁mne (2 * i) (2 * j)
  rw [combinedX.even, combinedX.even, combinedY.even, combinedY.even,
    Set.inter_eq_self_of_subset_right (D₀.sub_master (hXmem i)),
```

```
    Set.inter_eq_self_of_subset_right
      (XPseq.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
        hD₀mne hD₁mne i)] at key
  exact key

theorem X_eq_empty_iff_XPseq_eq_empty (n : ℕ) :
    X n = ∅ ↔ XPseq D₀ D₁ hD₀nomin hD₁nomin X Y n = ∅ := by
  have := X_inter_empty_iff_XPseq_inter_empty D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁
    diff
    hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne n n
  rwa [Set.inter_self, Set.inter_self] at this

theorem ne_empty (n : ℕ) : XPseq D₀ D₁ hD₀nomin hD₁nomin X Y n = ∅ := fun h =>
  hD₀nomin.mem_ne_empty (hXmem n)
    ((X_eq_empty_iff_XPseq_eq_empty D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁
    nomin X Y hXmem
      hYmem hD₀mne hD₁mne n).mpr h)

end AtomPair
end

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem mem (n : ℕ) : D₁.mem (XPseq D₀ D₁ hD₀nomin hD₁nomin X Y n) :=
  (XPseq.empty_or_mem D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem
    hYmem hD₀mne
    hD₁mne n).resolve_left
    (XPseq.ne_empty D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem
    hYmem hD₀mne
      hD₁mne n)

end AtomPair
end

end XPseq
open NeighborhoodSystem

namespace YPseq
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
```

```
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem inter_empty_iff_Y_inter_empty (i j : ℕ) :
    YPseq D₀ D₁ hD₀nomin hD₁nomin X Y i ∩ YPseq D₀ D₁ hD₀nomin hD₁nomin X Y j = ∅ ↔
      Y i ∩ Y j = ∅ := by
  have key := transfer.inter_empty_combined D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff
    hD₁nomin
    X Y hXmem hYmem hD₀mne hD₁mne (2 * i + 1) (2 * j + 1)
  rw [combinedX.odd, combinedX.odd, combinedY.odd, combinedY.odd,
    Set.inter_eq_self_of_subset_right
      (YPseq.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
        hD₀mne hD₁mne i),
    Set.inter_eq_self_of_subset_right (D₁.sub_master (hYmem i))] at key
  exact key

theorem Y_eq_empty_iff_YPseq_eq_empty (n : ℕ) :
    Y n = ∅ ↔ YPseq D₀ D₁ hD₀nomin hD₁nomin X Y n = ∅ := by
  have := inter_empty_iff_Y_inter_empty D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff
    hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne n n
  rw [Set.inter_self, Set.inter_self] at this
  exact this.symm

theorem ne_empty (n : ℕ) : YPseq D₀ D₁ hD₀nomin hD₁nomin X Y n = ∅ := fun h =>
  hD₁nomin.mem_ne_empty (hYmem n)
    ((Y_eq_empty_iff_YPseq_eq_empty D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁
    nomin X Y hXmem
      hYmem hD₀mne hD₁mne n).mpr h)

end AtomPair
end

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem mem (n : ℕ) : D₀.mem (YPseq D₀ D₁ hD₀nomin hD₁nomin X Y n) :=
  (YPseq.empty_or_mem D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem
    hYmem hD₀mne
    hD₁mne n).resolve_left
```

```
    (YPseq.ne_empty D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem
    hYmem hD₀mne
      hD₁mne n)

end AtomPair
end

end YPseq
open NeighborhoodSystem

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem X_subset_iff_XPseq_subset (i j : ℕ) :
    X i ⊆ X j ↔
      XPseq D₀ D₁ hD₀nomin hD₁nomin X Y i ⊆ XPseq D₀ D₁ hD₀nomin hD₁nomin X Y j := by
  have key := transfer.subset_combined D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁
    nomin X Y
    hXmem hYmem hD₀mne hD₁mne (2 * i) (2 * j)
  rw [combinedX.even, combinedX.even, combinedY.even, combinedY.even,
    Set.inter_eq_self_of_subset_right (D₀.sub_master (hXmem i)),
    Set.inter_eq_self_of_subset_right
      (XPseq.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
        hD₀mne hD₁mne i)] at key
  exact key

end AtomPair
end

section
section Iso

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hXcover : ∀ S, D₀.mem S ↔ ∃ n, S = X n) (hYcover : ∀ S, D₁.mem S ↔ ∃ n, S = Y n)
  (hX0 : X 0 = D₀.master) (hY0 : Y 0 = D₁.master)

include hD₀pos hD₀diff hD₁pos hD₁diff hXmem hYmem hD₀mne hD₁mne in

theorem X_eq_iff_XPseq_eq (i j : ℕ) :
    X i = X j ↔ XPseq D₀ D₁ hD₀nomin hD₁nomin X Y i = XPseq D₀ D₁ hD₀nomin hD₁nomin X Y
```

```
    j := by
  constructor
  · intro h
    exact Set.Subset.antisymm
      ((X_subset_iff_XPseq_subset D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin
    X Y hXmem
        hYmem hD₀mne hD₁mne i j).mp h.subset)
      ((X_subset_iff_XPseq_subset D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin
    X Y hXmem
        hYmem hD₀mne hD₁mne j i).mp h.symm.subset)
  · intro h
    exact Set.Subset.antisymm
      ((X_subset_iff_XPseq_subset D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin
    X Y hXmem
        hYmem hD₀mne hD₁mne i j).mpr h.subset)
      ((X_subset_iff_XPseq_subset D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin
    X Y hXmem
        hYmem hD₀mne hD₁mne j i).mpr h.symm.subset)

end Iso
end

section
section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

theorem X_inter_eq_iff_XPseq_inter_eq (i j k : ℕ) :
    X i ∩ X j = X k ↔
      XPseq D₀ D₁ hD₀nomin hD₁nomin X Y i ∩ XPseq D₀ D₁ hD₀nomin hD₁nomin X Y j =
        XPseq D₀ D₁ hD₀nomin hD₁nomin X Y k := by
  have key := transfer.inter_eq_combined D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD
    ₁nomin X Y
    hXmem hYmem hD₀mne hD₁mne (2 * i) (2 * j) (2 * k)
    (combinedX.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
      hD₀mne hD₁mne (2 * i))
    (combinedX.subset_master D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
    hXmem hYmem
      hD₀mne hD₁mne (2 * k))
  rw [combinedX.even, combinedX.even, combinedX.even, combinedY.even, combinedY.even,
    combinedY.even] at key
  exact key

end AtomPair
end

section
```

```
section Iso

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hXcover : ∀ S, D₀.mem S ↔ ∃ n, S = X n) (hYcover : ∀ S, D₁.mem S ↔ ∃ n, S = Y n)
  (hX0 : X 0 = D₀.master) (hY0 : Y 0 = D₁.master)

include hD₀pos hD₀diff hD₁pos hD₁diff hXmem hYmem hD₀mne hD₁mne hXcover in

theorem exists_inter_index_X {i j : ℕ} (hDij : D₀.mem (X i ∩ X j)) :
    ∃ m, X i ∩ X j = X m ∧
      XPseq D₀ D₁ hD₀nomin hD₁nomin X Y i ∩ XPseq D₀ D₁ hD₀nomin hD₁nomin X Y j =
        XPseq D₀ D₁ hD₀nomin hD₁nomin X Y m := by
  obtain ⟨m, hm⟩ := (hXcover (X i ∩ X j)).mp hDij
  exact ⟨m, hm, (X_inter_eq_iff_XPseq_inter_eq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁
    diff
    hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne i j m).mp hm⟩

end Iso
end

section
section Iso

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hXcover : ∀ S, D₀.mem S ↔ ∃ n, S = X n) (hYcover : ∀ S, D₁.mem S ↔ ∃ n, S = Y n)
  (hX0 : X 0 = D₀.master) (hY0 : Y 0 = D₁.master)

include hD₀pos hD₀diff hD₁pos hD₁diff hXmem hYmem hD₀mne hD₁mne hYcover in

theorem exists_inter_index_Y {i j : ℕ} (hDij : D₁.mem (Y i ∩ Y j)) :
    ∃ m, Y i ∩ Y j = Y m ∧
      YPseq D₀ D₁ hD₀nomin hD₁nomin X Y i ∩ YPseq D₀ D₁ hD₀nomin hD₁nomin X Y j =
        YPseq D₀ D₁ hD₀nomin hD₁nomin X Y m := by
  obtain ⟨m, hm⟩ := (hYcover (Y i ∩ Y j)).mp hDij
  exact ⟨m, hm, (YPseq.inter_eq_iff_Y_inter_eq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁
    diff
    hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne i j m).mpr hm⟩

end Iso
end

section
section Iso

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
```

```
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hXcover : ∀ S, D₀.mem S ↔ ∃ n, S = X n) (hYcover : ∀ S, D₁.mem S ↔ ∃ n, S = Y n)
  (hX0 : X 0 = D₀.master) (hY0 : Y 0 = D₁.master)

def toD0 (y : D₁.Element) : D₀.Element where
  mem S := ∃ n, S = YPseq D₀ D₁ hD₀nomin hD₁nomin X Y n ∧ y.mem (Y n)
  sub := fun ⟨n, hn, _⟩ =>
    hn ▸ YPseq.mem D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem hYmem
     hD₀mne
      hD₁mne n
  master_mem := ⟨0, (YPseq.zero D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
     hXmem
    hYmem hD₀mne hD₁mne hX0 hY0).symm, by rw [hY0]; exact y.master_mem⟩
  inter_mem := by
    rintro S1 S2 ⟨i, rfl, hyi⟩ ⟨j, rfl, hyj⟩
    obtain ⟨m, hYeq, hYPeq⟩ := exists_inter_index_Y D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos
    hD₁diff
      hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne hYcover (y.sub (y.inter_mem hyi hyj))
    exact ⟨m, hYPeq, hYeq ▸ y.inter_mem hyi hyj⟩
  up_mem := by
    rintro S1 S2 ⟨i, rfl, hyi⟩ hD0S2 hS1S2
    obtain ⟨k, hk⟩ := (hXcover S2).mp hD0S2
    subst hk
    have hYi_sub : Y i ⊆ XPseq D₀ D₁ hD₀nomin hD₁nomin X Y k :=
      (YPseq.subset_X_iff_Y_subset_XPseq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD
    ₁nomin X Y
        hXmem hYmem hD₀mne hD₁mne i k).mp hS1S2
    have hyXPk : y.mem (XPseq D₀ D₁ hD₀nomin hD₁nomin X Y k) :=
      y.up_mem hyi
        (XPseq.mem D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem hYmem
     hD₀mne
          hD₁mne k)
        hYi_sub
    obtain ⟨j, hj⟩ := (hYcover (XPseq D₀ D₁ hD₀nomin hD₁nomin X Y k)).mp (y.sub hyXPk)
    have hYPj_eq_Xk : X k = YPseq D₀ D₁ hD₀nomin hD₁nomin X Y j :=
      (XPseq.eq_Y_iff_X_eq_YPseq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X
     Y hXmem
        hYmem hD₀mne hD₁mne k j).mp hj
    exact ⟨j, hYPj_eq_Xk, hj ▸ hyXPk⟩

end Iso
end

section
section Iso

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hXcover : ∀ S, D₀.mem S ↔ ∃ n, S = X n) (hYcover : ∀ S, D₁.mem S ↔ ∃ n, S = Y n)
```

```
  (hX0 : X 0 = D₀.master) (hY0 : Y 0 = D₁.master)

def toD1 (x : D₀.Element) : D₁.Element where
  mem T := ∃ n, T = XPseq D₀ D₁ hD₀nomin hD₁nomin X Y n ∧ x.mem (X n)
  sub := fun ⟨n, hn, _⟩ =>
    hn ▸ XPseq.mem D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem hYmem
     hD₀mne
      hD₁mne n
  master_mem := ⟨0, (XPseq.zero D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
     hXmem
    hYmem hD₀mne hD₁mne hX0).symm, by rw [hX0]; exact x.master_mem⟩
  inter_mem := by
    rintro T1 T2 ⟨i, rfl, hxi⟩ ⟨j, rfl, hxj⟩
    obtain ⟨m, hXeq, hXPeq⟩ := exists_inter_index_X D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos
    hD₁diff
      hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne hXcover (x.sub (x.inter_mem hxi hxj))
    exact ⟨m, hXPeq, hXeq ▸ x.inter_mem hxi hxj⟩
  up_mem := by
    rintro T1 T2 ⟨i, rfl, hxi⟩ hD1T2 hT1T2
    obtain ⟨k, hk⟩ := (hYcover T2).mp hD1T2
    subst hk
    have hXi_sub : X i ⊆ YPseq D₀ D₁ hD₀nomin hD₁nomin X Y k :=
      (X_subset_YPseq_iff_XPseq_subset_Y D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD
    ₁nomin X Y
        hXmem hYmem hD₀mne hD₁mne i k).mpr hT1T2
    have hxYPk : x.mem (YPseq D₀ D₁ hD₀nomin hD₁nomin X Y k) :=
      x.up_mem hxi
        (YPseq.mem D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem hYmem
     hD₀mne
          hD₁mne k)
        hXi_sub
    obtain ⟨j, hj⟩ := (hXcover (YPseq D₀ D₁ hD₀nomin hD₁nomin X Y k)).mp (x.sub hxYPk)
    have hXPj_eq_Yk : XPseq D₀ D₁ hD₀nomin hD₁nomin X Y j = Y k :=
      (XPseq.eq_Y_iff_X_eq_YPseq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X
     Y hXmem
        hYmem hD₀mne hD₁mne j k).mpr hj.symm
    exact ⟨j, hXPj_eq_Yk.symm, hj ▸ hxYPk⟩

end Iso
end

end DomainTheory.NeighbourhoodSystems
```

domainIso812c.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.V
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_8
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    VComputablePresentation
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
```

```
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPair812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    splitSpec812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedXY812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedY812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XPseq812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    transfer812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    transfer812c_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.hcore812c

@[expose] public section

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
namespace affine

open NeighborhoodSystem

end affine
end DomainTheory.NeighbourhoodSystems

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem
section
section Iso

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hXcover : ∀ S, D₀.mem S ↔ ∃ n, S = X n) (hYcover : ∀ S, D₁.mem S ↔ ∃ n, S = Y n)
  (hX0 : X 0 = D₀.master) (hY0 : Y 0 = D₁.master)

noncomputable def domainIso812c : DomainIso D₀ D₁ where
  toFun := toD1 D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem hYmem hD₀
    mne hD₁mne
    hXcover hYcover hX0
  invFun := toD0 D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem hYmem
    hD₀mne
    hD₁mne hXcover hYcover hX0 hY0
  left_inv x := by
    apply Element.ext
    intro S
    constructor
```

```
  · rintro ⟨n, hn, k, hk, hxk⟩
    have hXeq : X k = YPseq D₀ D₁ hD₀nomin hD₁nomin X Y n :=
      (XPseq.eq_Y_iff_X_eq_YPseq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin
   X Y hXmem
        hYmem hD₀mne hD₁mne k n).mp hk.symm
    rw [hn, ← hXeq]
    exact hxk
  · intro hS
    obtain ⟨m, hm⟩ := (hXcover S).mp (x.sub hS)
    have hxXm : x.mem (X m) := hm ▸ hS
    obtain ⟨n, hn⟩ := (hYcover (XPseq D₀ D₁ hD₀nomin hD₁nomin X Y m)).mp
      (XPseq.mem D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem hYmem
   hD₀mne
        hD₁mne m)
    have hSYPn : S = YPseq D₀ D₁ hD₀nomin hD₁nomin X Y n :=
      hm.trans ((XPseq.eq_Y_iff_X_eq_YPseq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁
  diff hD₁nomin
        X Y hXmem hYmem hD₀mne hD₁mne m n).mp hn)
    exact ⟨n, hSYPn, m, hn.symm, hxXm⟩
right_inv y := by
  apply Element.ext
  intro T
  constructor
  · rintro ⟨n, hn, k, hk, hyk⟩
    have hXPeq : XPseq D₀ D₁ hD₀nomin hD₁nomin X Y n = Y k :=
      (XPseq.eq_Y_iff_X_eq_YPseq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin
   X Y hXmem
        hYmem hD₀mne hD₁mne n k).mpr hk
    rw [hn, hXPeq]
    exact hyk
  · intro hT
    obtain ⟨m, hm⟩ := (hYcover T).mp (y.sub hT)
    have hyYm : y.mem (Y m) := hm ▸ hT
    obtain ⟨n, hn⟩ := (hXcover (YPseq D₀ D₁ hD₀nomin hD₁nomin X Y m)).mp
      (YPseq.mem D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem hYmem
   hD₀mne
        hD₁mne m)
    have hTXPn : T = XPseq D₀ D₁ hD₀nomin hD₁nomin X Y n :=
      hm.trans (((XPseq.eq_Y_iff_X_eq_YPseq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁
  diff
        hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne n m).mpr hn.symm).symm)
    exact ⟨n, hTXPn, m, hn.symm, hyYm⟩
map_rel_iff' := by
  intro x x2
  constructor
  · intro hle S hxS
    obtain ⟨n, hn⟩ := (hXcover S).mp (x.sub hxS)
    have hxn : x.mem (X n) := hn ▸ hxS
    obtain ⟨k, hk, hx2k⟩ := hle _
      (⟨n, rfl, hxn⟩ : (toD1 D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y
  hXmem
        hYmem hD₀mne hD₁mne hXcover hYcover hX0 x).mem (XPseq D₀ D₁ hD₀nomin hD₁nomin
  X Y n))
    rw [hn, (X_eq_iff_XPseq_eq D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X
   Y hXmem
      hYmem hD₀mne hD₁mne n k).mpr hk]
```

```
      exact hx2k
    · intro hle T hT
      obtain ⟨n, hn, hxn⟩ := hT
      exact ⟨n, hn, hle _ hxn⟩

end Iso
end

section

theorem split_fst_subset' {α ? : Type*} {E : NeighborhoodSystem ?}
    {split : Set α → Set ? → Set α → Set ? × Set ?} (hsplit : SplitSpec' E split)
    {A : Set α} {B : Set ?} (hAB : A = ∅ ↔ B = ∅) (hBE : B = ∅ ∨ E.mem B) (Xn : Set α)
    :
    (split A B Xn).1 ⊆ B :=
  Set.subset_union_left.trans_eq (hsplit hAB hBE Xn).2.2.2.2.1

theorem split_snd_subset' {α ? : Type*} {E : NeighborhoodSystem ?}
    {split : Set α → Set ? → Set α → Set ? × Set ?} (hsplit : SplitSpec' E split)
    {A : Set α} {B : Set ?} (hAB : A = ∅ ↔ B = ∅) (hBE : B = ∅ ∨ E.mem B) (Xn : Set α)
    :
    (split A B Xn).2 ⊆ B :=
  Set.subset_union_right.trans_eq (hsplit hAB hBE Xn).2.2.2.2.1

section AtomPair

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin hXmem hYmem hD₀mne hD₁mne

end AtomPair

section Iso

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hXcover : ∀ S, D₀.mem S ↔ ∃ n, S = X n) (hYcover : ∀ S, D₁.mem S ↔ ∃ n, S = Y n)
  (hX0 : X 0 = D₀.master) (hY0 : Y 0 = D₁.master)

include hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem hYmem hD₀mne hD₁mne
    hXcover
  hYcover hX0 hY0 in

theorem isomorphic_812c : D₀ ≅? D₁ :=
  ⟨domainIso812c D₀ D₁ hD₀pos hD₀diff hD₀nomin hD₁pos hD₁diff hD₁nomin X Y hXmem hYmem hD
    ₀mne
    hD₁mne hXcover hYcover hX0 hY0⟩
```

```
end Iso
end

end DomainTheory.NeighbourhoodSystems
end
```

IsComputableUnion.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    domainIso812c
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

structure IsComputableUnion {α : Type*} {V : NeighborhoodSystem α} (P :
    ComputablePresentation V)
    where

  unionIdx : ℕ → ℕ → ℕ

  unionIdx_primrec : Nat.Primrec (fun t => unionIdx t.unpair.1 t.unpair.2)

  unionIdx_spec : ∀ {n m : ℕ}, (∃ k, P.X k = P.X n ∪ P.X m) → P.X (unionIdx n m) = P.X
     n ∪ P.X m

  union_computable : RecDecidable₂ (fun n m => ∃ k, P.X k = P.X n ∪ P.X m)

theorem NeighborhoodSystem.mem_union_of_mem {? : Type*} {D : NeighborhoodSystem ?}
    (hpos : D.IsPositive) (hdiff : D.DiffClosed) (hnomin : D.NoMinimal) {X Y : Set ?}
    (hX : D.mem X) (hY : D.mem Y) : D.mem (X ∪ Y) :=
  (union.mem_or_empty hpos hdiff (Or.inr hX) (Or.inr hY)).resolve_left fun h =>
    hnomin.mem_ne_empty hX (Set.subset_eq_empty Set.subset_union_left h)

namespace IsComputableUnion

noncomputable def combineFound2 {? : Type*} {W : NeighborhoodSystem ?}
    {Q : ComputablePresentation W} (hUnion : IsComputableUnion Q) (r0 r1 : ℕ) : ℕ :=
  selectFn r0.unpair.1
    (selectFn r1.unpair.1 (Nat.pair 1 (hUnion.unionIdx r0.unpair.2 r1.unpair.2)) r0)
    r1

namespace combineFound2
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

theorem found_iff {? : Type*} {W : NeighborhoodSystem ?}
    {Q : ComputablePresentation W} (hUnion : IsComputableUnion Q) {r0 r1 : ℕ}
    (h0 : r0.unpair.1 ≤ 1) (h1 : r1.unpair.1 ≤ 1) :
```

```
    (combineFound2 hUnion r0 r1).unpair.1 = 1 ↔ r0.unpair.1 = 1 ∨ r1.unpair.1 = 1 :=
    by
  unfold combineFound2
  rcases Nat.eq_zero_or_pos r0.unpair.1 with hr0 | hr0
  · rw [hr0, selectFn_zero]; omega
  · rw [show r0.unpair.1 = 1 from by omega, selectFn_one]
    rcases Nat.eq_zero_or_pos r1.unpair.1 with hr1 | hr1
    · rw [hr1, selectFn_zero]; omega
    · rw [show r1.unpair.1 = 1 from by omega, selectFn_one, unpair_pair_fst]; omega

theorem mem_iff {? : Type*} {W : NeighborhoodSystem ?}
    {Q : ComputablePresentation W} (hpos : W.IsPositive) (hdiff : W.DiffClosed)
    (hnomin : W.NoMinimal) (hUnion : IsComputableUnion Q) {r0 r1 : ℕ}
    (h0 : r0.unpair.1 ≤ 1) (h1 : r1.unpair.1 ≤ 1)
    (hmem0 : r0.unpair.1 = 1 → W.mem (Q.X r0.unpair.2))
    (hmem1 : r1.unpair.1 = 1 → W.mem (Q.X r1.unpair.2))
    (hfound : (combineFound2 hUnion r0 r1).unpair.1 = 1) (z : ?) :
    z ∈ Q.X (combineFound2 hUnion r0 r1).unpair.2 ↔
      (r0.unpair.1 = 1 ∧ z ∈ Q.X r0.unpair.2) ∨ (r1.unpair.1 = 1 ∧ z ∈ Q.X r1.unpair
    .2) := by
  unfold combineFound2 at hfound ⊢
  rcases Nat.eq_zero_or_pos r0.unpair.1 with hr0 | hr0
  · rw [hr0, selectFn_zero] at hfound ⊢
    constructor
    · intro hz; exact Or.inr ⟨hfound, hz⟩
    · rintro (⟨h, -⟩ | ⟨-, hz⟩)
      · omega
      · exact hz
  · rw [show r0.unpair.1 = 1 from by omega, selectFn_one] at hfound ⊢
    have hmem0' := hmem0 (by omega)
    rcases Nat.eq_zero_or_pos r1.unpair.1 with hr1 | hr1
    · rw [hr1, selectFn_zero] at hfound ⊢
      constructor
      · intro hz; exact Or.inl ⟨by omega, hz⟩
      · rintro (⟨-, hz⟩ | ⟨h, -⟩)
        · exact hz
        · omega
    · rw [show r1.unpair.1 = 1 from by omega, selectFn_one, unpair_pair_snd]
      have hmem1' := hmem1 (by omega)
      have hex : ∃ k, Q.X k = Q.X r0.unpair.2 ∪ Q.X r1.unpair.2 :=
        Q.surj (NeighborhoodSystem.mem_union_of_mem hpos hdiff hnomin hmem0' hmem1')
      rw [hUnion.unionIdx_spec hex, Set.mem_union]
      constructor
      · rintro (hz | hz)
        · exact Or.inl ⟨by omega, hz⟩
        · exact Or.inr ⟨by omega, hz⟩
      · rintro (⟨-, hz⟩ | ⟨-, hz⟩)
        · exact Or.inl hz
        · exact Or.inr hz

theorem mem_of_found {? : Type*} {W : NeighborhoodSystem ?}
    {Q : ComputablePresentation W} (hpos : W.IsPositive) (hdiff : W.DiffClosed)
    (hnomin : W.NoMinimal) (hUnion : IsComputableUnion Q) {r0 r1 : ℕ}
    (h0 : r0.unpair.1 ≤ 1) (h1 : r1.unpair.1 ≤ 1)
    (hmem0 : r0.unpair.1 = 1 → W.mem (Q.X r0.unpair.2))
    (hmem1 : r1.unpair.1 = 1 → W.mem (Q.X r1.unpair.2)) :
```

```
    (combineFound2 hUnion r0 r1).unpair.1 = 1 →
      W.mem (Q.X (combineFound2 hUnion r0 r1).unpair.2) := by
  unfold combineFound2
  rcases Nat.eq_zero_or_pos r0.unpair.1 with hr0 | hr0
  · rw [hr0, selectFn_zero]
    exact hmem1
  · rw [show r0.unpair.1 = 1 from by omega, selectFn_one]
    have hmem0' := hmem0 (by omega)
    rcases Nat.eq_zero_or_pos r1.unpair.1 with hr1 | hr1
    · rw [hr1, selectFn_zero]
      exact fun _ => hmem0'
    · rw [show r1.unpair.1 = 1 from by omega, selectFn_one, unpair_pair_snd]
      intro _
      have hmem1' := hmem1 (by omega)
      have hex : ∃ k, Q.X k = Q.X r0.unpair.2 ∪ Q.X r1.unpair.2 :=
        Q.surj (NeighborhoodSystem.mem_union_of_mem hpos hdiff hnomin hmem0' hmem1')
      rw [hUnion.unionIdx_spec hex]
      exact NeighborhoodSystem.mem_union_of_mem hpos hdiff hnomin hmem0' hmem1'

theorem found_le_one {? : Type*} {W : NeighborhoodSystem ?}
    {Q : ComputablePresentation W} (hUnion : IsComputableUnion Q) {r0 r1 : ℕ}
    (h0 : r0.unpair.1 ≤ 1) (h1 : r1.unpair.1 ≤ 1) :
    (combineFound2 hUnion r0 r1).unpair.1 ≤ 1 := by
  unfold combineFound2
  rcases Nat.eq_zero_or_pos r0.unpair.1 with hr0 | hr0
  · rw [hr0, selectFn_zero]; exact h1
  · rw [show r0.unpair.1 = 1 from by omega, selectFn_one]
    rcases Nat.eq_zero_or_pos r1.unpair.1 with hr1 | hr1
    · rw [hr1, selectFn_zero]; exact h0
    · rw [show r1.unpair.1 = 1 from by omega, selectFn_one, unpair_pair_fst]

end combineFound2

end IsComputableUnion

end DomainTheory.NeighbourhoodSystems
```

atomE.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    domainIso812c

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem

noncomputable def atomE {α ? : Type*} (E : NeighborhoodSystem ?)
    (split : Set α → Set ? → Set α → Set ? × Set ?)
    (X : ℕ → Set α) (Δ : Set α) (? : ℕ → Bool) : ℕ → Set ?
  | 0 => E.master
  | (n + 1) =>
      if ? n then (split (genAtom X Δ ? n) (atomE E split X Δ ? n) (X n)).1
```

```
      else (split (genAtom X Δ ? n) (atomE E split X Δ ? n) (X n)).2

section
variable {α ? : Type*}
variable (E : NeighborhoodSystem ?) (split : Set α → Set ? → Set α → Set ? × Set ?)
variable (X : ℕ → Set α) (Δ : Set α)

noncomputable def YseqE (n : ℕ) : Set ? :=
  ⋃ ?' : Fin n → Bool, atomE E split X Δ (extendTrue ?') (n + 1)

namespace atomE

@[simp] theorem zero (? : ℕ → Bool) : atomE E split X Δ ? 0 = E.master := rfl

theorem succ (? : ℕ → Bool) (n : ℕ) :
    atomE E split X Δ ? (n + 1) =
      if ? n then (split (genAtom X Δ ? n) (atomE E split X Δ ? n) (X n)).1
      else (split (genAtom X Δ ? n) (atomE E split X Δ ? n) (X n)).2 := rfl

theorem congr {? ?' : ℕ → Bool} {n : ℕ} (h : ∀ i < n, ? i = ?' i) :
    atomE E split X Δ ? n = atomE E split X Δ ?' n := by
  induction n with
  | zero => rfl
  | succ n ih =>
    have hprev : atomE E split X Δ ? n = atomE E split X Δ ?' n :=
      ih (fun i hi => h i (Nat.lt_succ_of_lt hi))
    have hA : genAtom X Δ ? n = genAtom X Δ ?' n :=
      genAtom_congr X Δ (fun i hi => h i (Nat.lt_succ_of_lt hi))
    have hn := h n (Nat.lt_succ_self n)
    rw [succ, succ, hA, hprev, hn]

end atomE

variable (hΔ : Δ.Nonempty) (hEmne : E.master.Nonempty) (hsplit : SplitSpec' E split)
include hΔ hEmne hsplit

namespace atomE

theorem invariant :
    ∀ n, (∀ ?, genAtom X Δ ? n = ∅ ↔ atomE E split X Δ ? n = ∅) ∧
      (∀ ?, atomE E split X Δ ? n = ∅ ∨ E.mem (atomE E split X Δ ? n)) ∧
      (∀ ? ?', (∃ i < n, ? i = ?' i) →
        atomE E split X Δ ? n ∩ atomE E split X Δ ?' n = ∅) := by
  intro n
  induction n with
  | zero =>
    refine ⟨fun ? => ?_, fun ? => Or.inr E.master_mem,
      fun ? ?' ⟨i, hi, _⟩ => absurd hi (Nat.not_lt_zero i)⟩
    show Δ = ∅ ↔ (E.master : Set ?) = ∅
    exact ⟨fun h => absurd h hΔ.ne_empty, fun h => absurd h hEmne.ne_empty⟩
  | succ n ih =>
    obtain ⟨ihmatch, ihmem, ihdisj⟩ := ih
    refine ⟨fun ? => ?_, fun ? => ?_, fun ? ?' ⟨i, hi, hne⟩ => ?_⟩
    · have hspec := hsplit (ihmatch ?) (ihmem ?) (X n)
      rw [succ]
      by_cases h? : ? n = true
```

```
    · rw [show genAtom X Δ ? (n + 1) = genAtom X Δ ? n ∩ X n from by simp [genAtom,
  h?]]
      simp only [h?, ite_true]
      exact hspec.2.2.1
    · rw [Bool.not_eq_true] at h?
      have hsub := genAtom_subset X Δ ? n
      rw [show genAtom X Δ ? (n + 1) = genAtom X Δ ? n \ X n from by
        have heq : genAtom X Δ ? (n + 1) = genAtom X Δ ? n ∩ (Δ \ X n) := by simp [
  genAtom, h?]
        rw [heq]
        ext x; constructor
        · rintro ⟨hx1, -, hx2⟩; exact ⟨hx1, hx2⟩
        · rintro ⟨hx1, hx2⟩; exact ⟨hx1, hsub hx1, hx2⟩]
      simp only [h?]
      exact hspec.2.2.2.1
  · have hspec := hsplit (ihmatch ?) (ihmem ?) (X n)
    rw [succ]
    by_cases h? : ? n = true
    · simp only [h?, ite_true]; exact hspec.1
    · simp only [h?]; exact hspec.2.1
  · by_cases hagree : ∀ j < n, ? j = ?' j
    · have h?n : ? n = ?' n := by
        intro heq
        exact hne (by
          rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
          · exact hagree i hi'
          · exact heq)
      have hA : genAtom X Δ ? n = genAtom X Δ ?' n := genAtom_congr X Δ hagree
      have hB : atomE E split X Δ ? n = atomE E split X Δ ?' n := congr E split X Δ
   hagree
      have hspec := hsplit (ihmatch ?) (ihmem ?) (X n)
      rw [succ, succ, hA, hB]
      have hIJ := hspec.2.2.2.2.2
      rcases Bool.eq_false_or_eq_true (? n) with h1 | h1 <;>
        rcases Bool.eq_false_or_eq_true (?' n) with h2 | h2 <;>
        simp_all [Set.inter_comm]
    · push Not at hagree
      obtain ⟨j, hj, hjne⟩ := hagree
      have hd : atomE E split X Δ ? n ∩ atomE E split X Δ ?' n = ∅ := ihdisj ? ?' ⟨j
  , hj, hjne⟩
      have h1 : atomE E split X Δ ? (n + 1) ⊆ atomE E split X Δ ? n := by
        rw [succ]
        by_cases h? : ? n = true
        · simp only [h?, ite_true]; exact split_fst_subset' hsplit (ihmatch ?) (ihmem
   ?) (X n)
        · simp only [h?]; exact split_snd_subset' hsplit (ihmatch ?) (ihmem ?) (X n)
      have h2 : atomE E split X Δ ?' (n + 1) ⊆ atomE E split X Δ ?' n := by
        rw [succ]
        by_cases h?' : ?' n = true
        · simp only [h?', ite_true]; exact split_fst_subset' hsplit (ihmatch ?') (
  ihmem ?') (X n)
        · simp only [h?']; exact split_snd_subset' hsplit (ihmatch ?') (ihmem ?') (X
  n)
      exact Set.subset_eq_empty (Set.inter_subset_inter h1 h2) hd

theorem succ_subset (? : ℕ → Bool) (n : ℕ) :
```

```
    atomE E split X Δ ? (n + 1) ⊆ atomE E split X Δ ? n := by
  obtain ⟨hmatch, hmem, -⟩ := invariant E split X Δ hΔ hEmne hsplit n
  rw [succ]
  by_cases h? : ? n = true
  · simp only [h?, ite_true]; exact split_fst_subset' hsplit (hmatch ?) (hmem ?) (X n)
  · simp only [h?]; exact split_snd_subset' hsplit (hmatch ?) (hmem ?) (X n)

theorem subset_master (? : ℕ → Bool) (n : ℕ) : atomE E split X Δ ? n ⊆ E.master := by
  induction n with
  | zero => exact subset_rfl
  | succ n ih => exact (succ_subset E split X Δ hΔ hEmne hsplit ? n).trans ih

end atomE

theorem split_fst_eq_inter_YseqE (? : ℕ → Bool) (n : ℕ) :
    (split (genAtom X Δ ? n) (atomE E split X Δ ? n) (X n)).1 =
      atomE E split X Δ ? n ∩ YseqE E split X Δ n := by
  obtain ⟨hmatch, hmem, hdisj⟩ := atomE.invariant E split X Δ hΔ hEmne hsplit n
  set A := genAtom X Δ ? n with hAdef
  set B := atomE E split X Δ ? n with hBdef
  set I := (split A B (X n)).1 with hIdef
  set ?2 := Function.update ? n true with h?2def
  set ?3 := extendTrue (restrictFin ?2 n) with h?3def
  have hagreefull : ∀ i < n + 1, ?3 i = ?2 i := by
    intro i hi
    rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
    · exact extendTrue_restrictFin_agree ?2 n i hi'
    · simp [h?3def, extendTrue, h?2def]
  have hI_eq : atomE E split X Δ ?2 (n + 1) = I := by
    rw [atomE.succ]
    have hd2n : ?2 n = true := by simp [h?2def]
    have hA2 : genAtom X Δ ?2 n = A := by
      apply genAtom_congr; intro i hi; simp [h?2def, Function.update_of_ne (ne_of_lt
    hi)]
    have hB2 : atomE E split X Δ ?2 n = B := by
      apply atomE.congr; intro i hi; simp [h?2def, Function.update_of_ne (ne_of_lt hi)
    ]
    rw [hd2n, ite_eq_left rfl, hA2, hB2]
  have h?3_eq : atomE E split X Δ ?3 (n + 1) = I := (atomE.congr E split X Δ
    hagreefull).trans hI_eq
  apply Set.Subset.antisymm
  · have hIsubB : I ⊆ B := split_fst_subset' hsplit (hmatch ?) (hmem ?) (X n)
    have hIsubY : I ⊆ YseqE E split X Δ n :=
      h?3_eq ▸ Set.subset_iUnion (fun ?' => atomE E split X Δ (extendTrue ?') (n + 1))
        (restrictFin ?2 n)
    exact Set.subset_inter hIsubB hIsubY
  · rintro z ⟨hzB, hzY⟩
    obtain ⟨?', hz'⟩ := Set.mem_iUnion.mp hzY
    by_cases hagree : ∀ i < n, extendTrue ?' i = ? i
    · have hAeq : genAtom X Δ (extendTrue ?') n = A := genAtom_congr X Δ hagree
      have hBeq : atomE E split X Δ (extendTrue ?') n = B := atomE.congr E split X Δ
    hagree
      have hlast : extendTrue ?' n = true := by simp [extendTrue]
      have heq : atomE E split X Δ (extendTrue ?') (n + 1) = I := by
        rw [atomE.succ, hAeq, hBeq, hlast, ite_eq_left rfl]
      rwa [heq] at hz'
```

```
    · push Not at hagree
      obtain ⟨j, hj, hjne⟩ := hagree
      have hzB' : z ∈ atomE E split X Δ (extendTrue ?') n :=
        atomE.succ_subset E split X Δ hΔ hEmne hsplit (extendTrue ?') n hz'
      have hempty := hdisj ? (extendTrue ?') ⟨j, hj, fun h => hjne (h.symm)⟩
      exact absurd (Set.mem_inter hzB hzB') (by rw [hempty]; simp)

namespace atomE

theorem succ_eq (? : ℕ → Bool) (n : ℕ) :
    atomE E split X Δ ? (n + 1) =
      atomE E split X Δ ? n ∩
        (if ? n then YseqE E split X Δ n else E.master \ YseqE E split X Δ n) := by
  obtain ⟨hmatch, hmem, -⟩ := invariant E split X Δ hΔ hEmne hsplit n
  have hspec := hsplit (hmatch ?) (hmem ?) (X n)
  have hIeq := split_fst_eq_inter_YseqE E split X Δ hΔ hEmne hsplit ? n
  by_cases h? : ? n = true
  · rw [succ, ite_eq_left h?, ite_eq_left h?]; exact hIeq
  · rw [succ, ite_eq_right h?, ite_eq_right h?]
    have hJeq : (split (genAtom X Δ ? n) (atomE E split X Δ ? n) (X n)).2 =
        atomE E split X Δ ? n \ YseqE E split X Δ n := by
      have hunion := hspec.2.2.2.2.1
      have hinter := hspec.2.2.2.2.2
      ext x
      constructor
      · intro hxJ
        have hxB : x ∈ atomE E split X Δ ? n := hunion ▸ Or.inr hxJ
        refine ⟨hxB, fun hxY => ?_⟩
        have hxI : x ∈ (split (genAtom X Δ ? n) (atomE E split X Δ ? n) (X n)).1 :=
          hIeq ▸ Set.mem_inter hxB hxY
        exact absurd (Set.mem_inter hxI hxJ) (by rw [hinter]; simp)
      · rintro ⟨hxB, hxnY⟩
        rw [← hunion] at hxB
        rcases hxB with hxI | hxJ
        · exact absurd (hIeq ▸ hxI : x ∈ atomE E split X Δ ? n ∩ YseqE E split X Δ n)
    .2 hxnY
        · exact hxJ
    rw [hJeq]
    have hsub := subset_master E split X Δ hΔ hEmne hsplit ? n
    ext x
    constructor
    · rintro ⟨hx1, hx2⟩; exact ⟨hx1, hsub hx1, hx2⟩
    · rintro ⟨hx1, -, hx2⟩; exact ⟨hx1, hx2⟩

theorem eq_genAtom (? : ℕ → Bool) :
    ∀ n, atomE E split X Δ ? n = genAtom (YseqE E split X Δ) E.master ? n
  | 0 => rfl
  | (n + 1) => by
      rw [succ_eq E split X Δ hΔ hEmne hsplit, eq_genAtom ? n]; rfl

end atomE

theorem transfer_empty_iffE {cs : List (ℕ × Bool)} {n : ℕ} (hn : ∀ p ∈ cs, p.1 < n) :
    {x ∈ Δ | ∀ p ∈ cs, (p.2 = true ↔ x ∈ X p.1)}.Nonempty ↔
      {y ∈ E.master | ∀ p ∈ cs, (p.2 = true ↔ y ∈ YseqE E split X Δ p.1)}.Nonempty :=
     by
```

```
  have hcore : ∀ ? n, genAtom X Δ ? n = ∅ ↔ genAtom (YseqE E split X Δ) E.master ? n
    = ∅ :=
    fun ? n => (atomE.invariant E split X Δ hΔ hEmne hsplit n).1 ?
      |>.trans (by rw [atomE.eq_genAtom E split X Δ hΔ hEmne hsplit])
  have hcore' : ∀ ? n, genAtom (YseqE E split X Δ) E.master ? n = ∅ ↔ genAtom X Δ ? n
     = ∅ :=
    fun ? n => (hcore ? n).symm
  exact ⟨transfer_dir X Δ (YseqE E split X Δ) E.master hcore hn,
    transfer_dir (YseqE E split X Δ) E.master X Δ hcore' hn⟩

end

end DomainTheory.NeighbourhoodSystems
```

IsComputableDiff.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    domainIso812c
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

structure IsComputableDiff {α : Type*} {V : NeighborhoodSystem α} (P :
    ComputablePresentation V) where
  diffIdx : ℕ → ℕ → ℕ
  diffIdx_primrec : Nat.Primrec (fun t => diffIdx t.unpair.1 t.unpair.2)
  diffIdx_spec : ∀ {n m : ℕ}, (∃ k, P.X k = P.X n \ P.X m) → P.X (diffIdx n m) = P.X n
     \ P.X m
  diff_computable : RecDecidable₂ (fun n m => ∃ k, P.X k = P.X n \ P.X m)

namespace IsComputableDiff

variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)
variable (hDiff : IsComputableDiff P)

theorem exists_iff_ne_empty (hdiff : V.DiffClosed) (hnomin : V.NoMinimal) (n m : ℕ) :
    (∃ k, P.X k = P.X n \ P.X m) ↔ P.X n \ P.X m = ∅ := by
  constructor
  · rintro ⟨k, hk⟩ hempty
    exact NoMinimal.mem_ne_empty hnomin (P.mem_X k) (hk.trans hempty)
  · intro hne
    rcases hdiff (P.mem_X n) (P.mem_X m) with hempty | hmem
    · exact absurd hempty hne
    · exact P.surj hmem

noncomputable def existsDiffDec : ℕ → ℕ := fun t => isOne (hDiff.diff_computable.
    choose t)
```

```
namespace existsDiffDec

theorem le_one (t : ℕ) : existsDiffDec P hDiff t ≤ 1 := isOne_le_one _

theorem spec (n m : ℕ) :
    existsDiffDec P hDiff (Nat.pair n m) = 1 ↔ ∃ k, P.X k = P.X n \ P.X m := by
  unfold existsDiffDec
  rw [isOne_eq_one_iff]
  have h := hDiff.diff_computable.choose_spec.2 (Nat.pair n m)
  dsimp only at h
  rw [unpair_pair_fst, unpair_pair_snd] at h
  exact h.symm

theorem eq_zero_iff (hdiff : V.DiffClosed) (hnomin : V.NoMinimal) (n m : ℕ) :
    existsDiffDec P hDiff (Nat.pair n m) = 0 ↔ P.X n \ P.X m = ∅ := by
  have hle := existsDiffDec.le_one P hDiff (Nat.pair n m)
  have h1 := existsDiffDec.spec P hDiff n m
  have h2 := exists_iff_ne_empty P hdiff hnomin n m
  constructor
  · intro h0
    by_contra hne
    have h1' : existsDiffDec P hDiff (Nat.pair n m) = 1 := h1.mpr (h2.mpr hne)
    omega
  · intro hempty
    by_contra hne0
    have h1' : existsDiffDec P hDiff (Nat.pair n m) = 1 := by omega
    exact (h2.mp (h1.mp h1')) hempty

end existsDiffDec

noncomputable def emptyDiffDec : ℕ → ℕ := fun t => 1 - existsDiffDec P hDiff t

namespace emptyDiffDec

theorem le_one (t : ℕ) : emptyDiffDec P hDiff t ≤ 1 := by
  unfold emptyDiffDec; have := existsDiffDec.le_one P hDiff t; omega

theorem eq_one_iff (hdiff : V.DiffClosed) (hnomin : V.NoMinimal) (n m : ℕ) :
    emptyDiffDec P hDiff (Nat.pair n m) = 1 ↔ P.X n \ P.X m = ∅ := by
  unfold emptyDiffDec
  have hle := existsDiffDec.le_one P hDiff (Nat.pair n m)
  have h0 := existsDiffDec.eq_zero_iff P hDiff hdiff hnomin n m
  constructor
  · intro h1; apply h0.mp; omega
  · intro hempty; have := h0.mpr hempty; omega

end emptyDiffDec

namespace primrec

theorem existsDiffDec : Nat.Primrec (_root_.DomainTheory.NeighbourhoodSystems.
    IsComputableDiff.existsDiffDec P hDiff) :=
  (primrec_isOne.comp hDiff.diff_computable.choose_spec.1).of_eq fun _ => rfl

theorem emptyDiffDec : Nat.Primrec (_root_.DomainTheory.NeighbourhoodSystems.
```

```
    IsComputableDiff.emptyDiffDec P hDiff) :=
  primrec_sub₂ (Nat.Primrec.const 1) (primrec.existsDiffDec P hDiff)

end primrec

end IsComputableDiff

variable {α : Type*} {V : NeighborhoodSystem α} (P : ComputablePresentation V)

noncomputable def existsInterDec : ℕ → ℕ := fun t => isOne (P.cons_computable.choose
    t)

namespace existsInterDec

theorem le_one (t : ℕ) : existsInterDec P t ≤ 1 := isOne_le_one _

theorem spec (n m : ℕ) :
    existsInterDec P (Nat.pair n m) = 1 ↔ ∃ k, P.X k ⊆ P.X n ∩ P.X m := by
  unfold existsInterDec
  rw [isOne_eq_one_iff]
  have h := P.cons_computable.choose_spec.2 (Nat.pair n m)
  dsimp only at h
  rw [unpair_pair_fst, unpair_pair_snd] at h
  exact h.symm

theorem eq_zero_iff (hpos : V.IsPositive) (hnomin : V.NoMinimal) (n m : ℕ) :
    existsInterDec P (Nat.pair n m) = 0 ↔ P.X n ∩ P.X m = ∅ := by
  have hle := existsInterDec.le_one P (Nat.pair n m)
  constructor
  · intro h0
    by_contra hne
    have hmem : V.mem (P.X n ∩ P.X m) :=
      (hpos (P.mem_X n) (P.mem_X m)).mpr (Set.nonempty_iff_ne_empty.mpr hne)
    obtain ⟨k, hk⟩ := P.surj hmem
    have h1 : existsInterDec P (Nat.pair n m) = 1 :=
      (existsInterDec.spec P n m).mpr ⟨k, by rw [hk]⟩
    omega
  · intro hempty
    by_contra hne1
    have h1 : existsInterDec P (Nat.pair n m) = 1 := by omega
    obtain ⟨k, hk⟩ := (existsInterDec.spec P n m).mp h1
    exact absurd (Set.subset_eq_empty hk hempty) (hnomin.mem_ne_empty (P.mem_X k))

end existsInterDec

noncomputable def emptyInterDec : ℕ → ℕ := fun t => 1 - existsInterDec P t

namespace emptyInterDec

theorem le_one (t : ℕ) : emptyInterDec P t ≤ 1 := by
  unfold emptyInterDec; have := existsInterDec.le_one P t; omega

theorem eq_one_iff (hpos : V.IsPositive) (hnomin : V.NoMinimal) (n m : ℕ) :
    emptyInterDec P (Nat.pair n m) = 1 ↔ P.X n ∩ P.X m = ∅ := by
  unfold emptyInterDec
  have hle := existsInterDec.le_one P (Nat.pair n m)
```

```
  have h0 := existsInterDec.eq_zero_iff P hpos hnomin n m
  constructor
  · intro h1; apply h0.mp; omega
  · intro hempty; have := h0.mpr hempty; omega

end emptyInterDec

namespace primrec

theorem existsInterDec : Nat.Primrec (_root_.DomainTheory.NeighbourhoodSystems.
    existsInterDec P) :=
  (primrec_isOne.comp P.cons_computable.choose_spec.1).of_eq fun _ => rfl

theorem emptyInterDec : Nat.Primrec (_root_.DomainTheory.NeighbourhoodSystems.
    emptyInterDec P) :=
  primrec_sub₂ (Nat.Primrec.const 1) (primrec.existsInterDec P)

end primrec

end DomainTheory.NeighbourhoodSystems
```

ComputableBisection.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableDiff
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableSplit
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    domainIso812c
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

structure ComputableBisection {? : Type*} {W : NeighborhoodSystem ?} (Q :
    ComputablePresentation W) where
  left : ℕ → ℕ
  right : ℕ → ℕ
  left_primrec : Nat.Primrec left
  right_primrec : Nat.Primrec right
  disjoint : ∀ k, Q.X (left k) ∩ Q.X (right k) = ∅
  union : ∀ k, Q.X (left k) ∪ Q.X (right k) = Q.X k
  left_congr : ∀ k k', Q.X k = Q.X k' → Q.X (left k) = Q.X (left k')
  right_congr : ∀ k k', Q.X k = Q.X k' → Q.X (right k) = Q.X (right k')

namespace ComputableBisection

variable {α ? : Type*} {V : NeighborhoodSystem α} {W : NeighborhoodSystem ?}
```

```
  (P : ComputablePresentation V) (hDiff : IsComputableDiff P)
  {Q : ComputablePresentation W} (B : ComputableBisection Q) (hWnomin : W.NoMinimal)

open scoped Classical in
noncomputable def splitFromBisection (A : Set α) (B' : Set ?) (Xn : Set α) : Set ? ×
    Set ? :=
  if h : ∃ n m k, A = P.X n ∧ B' = Q.X m ∧ Xn = P.X k then
    if emptyInterDec P (Nat.pair h.choose h.choose_spec.choose_spec.choose) = 1 then
      (∅, B')
    else if IsComputableDiff.emptyDiffDec P hDiff (Nat.pair h.choose h.choose_spec.
    choose_spec.choose) = 1 then
      (B', ∅)
    else
      (Q.X (B.left h.choose_spec.choose), Q.X (B.right h.choose_spec.choose))
  else
    splitChoice' W hWnomin A B' Xn

noncomputable def negIdxFromBisection (n m k : ℕ) : ℕ :=
  selectFn (emptyInterDec P (Nat.pair n k)) m
    (selectFn (IsComputableDiff.emptyDiffDec P hDiff (Nat.pair n k)) m (B.right m))

noncomputable def posIdxFromBisection (n m k : ℕ) : ℕ :=
  selectFn (emptyInterDec P (Nat.pair n k)) m
    (selectFn (IsComputableDiff.emptyDiffDec P hDiff (Nat.pair n k)) m (B.left m))

namespace emptyDiffDec

theorem congr {n n' k k' : ℕ} (hdiffClosed : V.DiffClosed) (hnomin : V.NoMinimal)
    (hn : P.X n = P.X n') (hk : P.X k = P.X k') :
    IsComputableDiff.emptyDiffDec P hDiff (Nat.pair n k) =
      IsComputableDiff.emptyDiffDec P hDiff (Nat.pair n' k') := by
  have h1 := IsComputableDiff.emptyDiffDec.eq_one_iff P hDiff hdiffClosed hnomin n k
  have h2 := IsComputableDiff.emptyDiffDec.eq_one_iff P hDiff hdiffClosed hnomin n' k'
  rw [hn, hk] at h1
  have hiff : IsComputableDiff.emptyDiffDec P hDiff (Nat.pair n k) = 1 ↔
      IsComputableDiff.emptyDiffDec P hDiff (Nat.pair n' k') = 1 :=
    h1.trans h2.symm
  have hle1 := IsComputableDiff.emptyDiffDec.le_one P hDiff (Nat.pair n k)
  have hle2 := IsComputableDiff.emptyDiffDec.le_one P hDiff (Nat.pair n' k')
  omega

end emptyDiffDec

namespace emptyInterDec

theorem congr {n n' k k' : ℕ} (hpos : V.IsPositive) (hnomin : V.NoMinimal)
    (hn : P.X n = P.X n') (hk : P.X k = P.X k') :
    emptyInterDec P (Nat.pair n k) = emptyInterDec P (Nat.pair n' k') := by
  have h1 := emptyInterDec.eq_one_iff P hpos hnomin n k
  have h2 := emptyInterDec.eq_one_iff P hpos hnomin n' k'
  rw [hn, hk] at h1
  have hiff : emptyInterDec P (Nat.pair n k) = 1 ↔ emptyInterDec P (Nat.pair n' k') =
    1 :=
    h1.trans h2.symm
  have hle1 := emptyInterDec.le_one P (Nat.pair n k)
  have hle2 := emptyInterDec.le_one P (Nat.pair n' k')
```

```
  omega

end emptyInterDec

namespace splitFromBisection

theorem eq (hpos : V.IsPositive) (hnomin : V.NoMinimal)
    (hdiffClosed : V.DiffClosed) (n m k : ℕ) :
    splitFromBisection P hDiff B hWnomin (P.X n) (Q.X m) (P.X k) =
      if emptyInterDec P (Nat.pair n k) = 1 then (∅, Q.X m)
      else if IsComputableDiff.emptyDiffDec P hDiff (Nat.pair n k) = 1 then (Q.X m, ∅)
      else (Q.X (B.left m), Q.X (B.right m)) := by
  have hex : ∃ n' m' k', P.X n = P.X n' ∧ Q.X m = Q.X m' ∧ P.X k = P.X k' :=
    ⟨n, m, k, rfl, rfl, rfl⟩
  obtain ⟨hn', hm', hk'⟩ := hex.choose_spec.choose_spec.choose_spec
  have hInterEq : emptyInterDec P (Nat.pair hex.choose hex.choose_spec.choose_spec.
    choose) =
      emptyInterDec P (Nat.pair n k) := (emptyInterDec.congr P hpos hnomin hn' hk').
    symm
  have hDiffEq : IsComputableDiff.emptyDiffDec P hDiff
      (Nat.pair hex.choose hex.choose_spec.choose_spec.choose) =
      IsComputableDiff.emptyDiffDec P hDiff (Nat.pair n k) :=
    (emptyDiffDec.congr P hDiff hdiffClosed hnomin hn' hk').symm
  unfold splitFromBisection
  rw [dite_eq_left hex, hInterEq, hDiffEq]
  split_ifs with h1 h2
  · rfl
  · rfl
  · have hl := (B.left_congr m hex.choose_spec.choose hm').symm
    have hr := (B.right_congr m hex.choose_spec.choose hm').symm
    rw [hl, hr]

end splitFromBisection

namespace primrec

theorem negIdxFromBisection :
    Nat.Primrec (fun t => negIdxFromBisection P hDiff B
      t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair.2) := by
  have hn : Nat.Primrec (fun t : ℕ => t.unpair.1) := Nat.Primrec.left
  have hm : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.right
  have hk : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.2) := Nat.Primrec.right.comp
    Nat.Primrec.right
  have hnk : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.1 t.unpair.2.unpair.2) := hn.
    pair hk
  have hinter : Nat.Primrec
      (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.emptyInterDec P
        (Nat.pair t.unpair.1 t.unpair.2.unpair.2)) :=
    (primrec.emptyInterDec P).comp hnk
  have hdiffD : Nat.Primrec
      (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.IsComputableDiff.
    emptyDiffDec P hDiff
        (Nat.pair t.unpair.1 t.unpair.2.unpair.2)) :=
    (IsComputableDiff.primrec.emptyDiffDec P hDiff).comp hnk
  have hright : Nat.Primrec (fun t : ℕ => B.right t.unpair.2.unpair.1) := B.
```

```
    right_primrec.comp hm
  have hinner : Nat.Primrec (fun t : ℕ => selectFn
      (_root_.DomainTheory.NeighbourhoodSystems.IsComputableDiff.emptyDiffDec P hDiff
        (Nat.pair t.unpair.1 t.unpair.2.unpair.2)) t.unpair.2.unpair.1
      (B.right t.unpair.2.unpair.1)) :=
    primrec_selectFn hdiffD hm hright
  exact (primrec_selectFn hinter hm hinner).of_eq fun _ => rfl

theorem posIdxFromBisection :
    Nat.Primrec (fun t => posIdxFromBisection P hDiff B
      t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair.2) := by
  have hn : Nat.Primrec (fun t : ℕ => t.unpair.1) := Nat.Primrec.left
  have hm : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.right
  have hk : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.2) := Nat.Primrec.right.comp
    Nat.Primrec.right
  have hnk : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.1 t.unpair.2.unpair.2) := hn.
    pair hk
  have hinter : Nat.Primrec
      (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.emptyInterDec P
        (Nat.pair t.unpair.1 t.unpair.2.unpair.2)) :=
    (primrec.emptyInterDec P).comp hnk
  have hdiffD : Nat.Primrec
      (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.IsComputableDiff.
    emptyDiffDec P hDiff
        (Nat.pair t.unpair.1 t.unpair.2.unpair.2)) :=
    (IsComputableDiff.primrec.emptyDiffDec P hDiff).comp hnk
  have hleft : Nat.Primrec (fun t : ℕ => B.left t.unpair.2.unpair.1) := B.left_primrec
    .comp hm
  have hinner : Nat.Primrec (fun t : ℕ => selectFn
      (_root_.DomainTheory.NeighbourhoodSystems.IsComputableDiff.emptyDiffDec P hDiff
        (Nat.pair t.unpair.1 t.unpair.2.unpair.2)) t.unpair.2.unpair.1
      (B.left t.unpair.2.unpair.1)) :=
    primrec_selectFn hdiffD hm hleft
  exact (primrec_selectFn hinter hm hinner).of_eq fun _ => rfl

end primrec

namespace isComputableSplit

noncomputable def ofBisection (hpos : V.IsPositive) (hnomin : V.NoMinimal)
    (hdiffClosed : V.DiffClosed) :
    IsComputableSplit P Q (splitFromBisection P hDiff B hWnomin) where
  posIdx := posIdxFromBisection P hDiff B
  negIdx := negIdxFromBisection P hDiff B
  posIdx_primrec := primrec.posIdxFromBisection P hDiff B
  negIdx_primrec := primrec.negIdxFromBisection P hDiff B
  posIdx_spec n m k hne := by
    rw [splitFromBisection.eq P hDiff B hWnomin hpos hnomin hdiffClosed n m k] at hne
    ⊢
    split_ifs at hne ⊢ with h1 h2
    · exact absurd rfl hne
    · have h1' : emptyInterDec P (Nat.pair n k) = 0 := by
        have := emptyInterDec.le_one P (Nat.pair n k); omega
      simp [posIdxFromBisection, h1', h2]
    · have h1' : emptyInterDec P (Nat.pair n k) = 0 := by
```

```
        have := emptyInterDec.le_one P (Nat.pair n k); omega
      have h2' : IsComputableDiff.emptyDiffDec P hDiff (Nat.pair n k) = 0 := by
        have := IsComputableDiff.emptyDiffDec.le_one P hDiff (Nat.pair n k); omega
      simp [posIdxFromBisection, h1', h2']
  negIdx_spec n m k hne := by
    rw [splitFromBisection.eq P hDiff B hWnomin hpos hnomin hdiffClosed n m k] at hne
    ⊢
    split_ifs at hne ⊢ with h1 h2
    · simp [negIdxFromBisection, h1]
    · exact absurd rfl hne
    · have h1' : emptyInterDec P (Nat.pair n k) = 0 := by
        have := emptyInterDec.le_one P (Nat.pair n k); omega
      have h2' : IsComputableDiff.emptyDiffDec P hDiff (Nat.pair n k) = 0 := by
        have := IsComputableDiff.emptyDiffDec.le_one P hDiff (Nat.pair n k); omega
      simp [negIdxFromBisection, h1', h2']

end isComputableSplit

end ComputableBisection

end DomainTheory.NeighbourhoodSystems
```

Udiff.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    VComputablePresentation
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.splitV
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableDiff
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    QPairCodes
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.UX
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    ComputableBisection
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_1
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.Vinter

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open Domain.Recursive NeighborhoodSystem

theorem U_union_UX_mem (n m : ℕ) : U.mem (UX n ∪ UX m) := by
  obtain ⟨⟨L1, hL1⟩, hne1, hsub1⟩ := U_mem_UX n
  obtain ⟨⟨L2, hL2⟩, -, hsub2⟩ := U_mem_UX m
  exact ⟨⟨L1 ++ L2, by rw [presentedIntervals.append, hL1, hL2]⟩,
    hne1.mono Set.subset_union_left, Set.union_subset hsub1 hsub2⟩

def VunionRaw (n m : ℕ) : ℕ :=
  Nat.pair (max (canonIdx n).unpair.1 (canonIdx m).unpair.1)
```

```
    (myLor
      (myUpsample (canonIdx n).unpair.1 (max (canonIdx n).unpair.1 (canonIdx m).unpair
    .1)
        (canonIdx n).unpair.2)
      (myUpsample (canonIdx m).unpair.1 (max (canonIdx n).unpair.1 (canonIdx m).unpair
    .1)
        (canonIdx m).unpair.2))

theorem decodeQPairList_appendListCode (c1 c2 : ℕ) :
    decodeQPairList (appendListCode c1 c2) = decodeQPairList c1 ++ decodeQPairList c2
    := by
  unfold decodeQPairList
  rw [appendListCode_eq, List.map_append]

def lowXor (x y : ℕ) : ℕ := (x % 2 + y % 2) % 2

def xorStep (s : ℕ) : ℕ :=
  Nat.pair (Nat.pair (s.unpair.1.unpair.1 / 2) (s.unpair.1.unpair.2 / 2))
    (Nat.pair (2 * s.unpair.2.unpair.1)
      (s.unpair.2.unpair.2 + s.unpair.2.unpair.1 * lowXor s.unpair.1.unpair.1 s.unpair
    .1.unpair.2))

def myXor (a b : ℕ) : ℕ :=
  (xorStep^[a + b] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.2

def myAndNot (a b : ℕ) : ℕ := myXor a (myLand a b)

def VdiffRaw (n m : ℕ) : ℕ :=
  Nat.pair (max (canonIdx n).unpair.1 (canonIdx m).unpair.1)
    (myAndNot
      (myUpsample (canonIdx n).unpair.1 (max (canonIdx n).unpair.1 (canonIdx m).unpair
    .1)
        (canonIdx n).unpair.2)
      (myUpsample (canonIdx m).unpair.1 (max (canonIdx n).unpair.1 (canonIdx m).unpair
    .1)
        (canonIdx m).unpair.2))

theorem myXor_eq_xor (a b : ℕ) : myXor a b = a ^^^ b := by
  have xor_low_rec : ∀ x y : ℕ, x ^^^ y = 2 * (x / 2 ^^^ y / 2) + lowXor x y := by
    intro x y
    have hdiv : (x ^^^ y) / 2 = x / 2 ^^^ y / 2 := by
      apply Nat.eq_of_testBit_eq
      intro i
      rw [← Nat.testBit_add_one, Nat.testBit_xor, Nat.testBit_xor, Nat.testBit_add_one
    ,
        Nat.testBit_add_one]
    have hmod : lowXor x y = (x ^^^ y) % 2 := by
      unfold lowXor
      rw [Nat.xor_mod_two_eq]
      exact (Nat.add_mod x y 2).symm
    conv_lhs => rw [← Nat.div_add_mod (x ^^^ y) 2]
    rw [hdiv, hmod]
  have xorStep_iter_spec : ∀ k,
      (xorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.unpair.1 = a / 2
    ^ k ∧
      (xorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.unpair.2 = b / 2
```

```
   ^ k ∧
     (xorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.1 = 2 ^ k
   ∧
     (xorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.2 +
         2 ^ k * (a / 2 ^ k ^^^ b / 2 ^ k) = a ^^^ b := by
   intro k
   induction k with
   | zero =>
     simp only [Function.iterate_zero_apply, unpair_pair_fst, unpair_pair_snd,
   pow_zero,
       Nat.div_one, Nat.one_mul, Nat.zero_add, true_and]
   | succ k ih =>
     obtain ⟨hA, hB, hW, hAcc⟩ := ih
     rw [Function.iterate_succ_apply']
     have hdd : a / 2 ^ (k + 1) = (a / 2 ^ k) / 2 := by rw [Nat.div_div_eq_div_mul, ←
    pow_succ]
     have hdd' : b / 2 ^ (k + 1) = (b / 2 ^ k) / 2 := by rw [Nat.div_div_eq_div_mul,
   ← pow_succ]
     have p11 : (xorStep (xorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0)))).
   unpair.1.unpair.1
         = (xorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.unpair.1 /
    2 := by
       unfold xorStep; rw [unpair_pair_fst, unpair_pair_fst]
     have p12 : (xorStep (xorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0)))).
   unpair.1.unpair.2
         = (xorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.unpair.2 /
    2 := by
       unfold xorStep; rw [unpair_pair_fst, unpair_pair_snd]
     have p21 : (xorStep (xorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0)))).
   unpair.2.unpair.1
         = 2 * (xorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair
   .1 := by
       unfold xorStep; rw [unpair_pair_snd, unpair_pair_fst]
     have p22 : (xorStep (xorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0)))).
   unpair.2.unpair.2
         = (xorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.2
           + (xorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.2.unpair.1
             * lowXor (xorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair
   .1.unpair.1
                 (xorStep^[k] (Nat.pair (Nat.pair a b) (Nat.pair 1 0))).unpair.1.
   unpair.2 := by
       unfold xorStep; rw [unpair_pair_snd, unpair_pair_snd]
     refine ⟨?_, ?_, ?_, ?_⟩
     · rw [p11, hA, Nat.div_div_eq_div_mul, ← pow_succ]
     · rw [p12, hB, Nat.div_div_eq_div_mul, ← pow_succ]
     · rw [p21, hW, ← pow_succ']
     · rw [p22, hA, hB, hW, hdd, hdd', pow_succ, ← hAcc, xor_low_rec (a / 2 ^ k) (b /
    2 ^ k)]
       ring
unfold myXor
obtain ⟨_, _, _, hAcc⟩ := xorStep_iter_spec (a + b)
have ha0 : a / 2 ^ (a + b) = 0 :=
  Nat.div_eq_of_lt (Nat.lt_of_lt_of_le Nat.lt_two_pow_self (Nat.pow_le_pow_right (by
    decide)
     (Nat.le_add_right a b)))
have hb0 : b / 2 ^ (a + b) = 0 :=
```

```
    Nat.div_eq_of_lt (Nat.lt_of_lt_of_le Nat.lt_two_pow_self (Nat.pow_le_pow_right (by
     decide)
       (Nat.le_add_left b a)))
  rw [ha0, hb0] at hAcc
  simpa using hAcc

theorem myAndNot_eq (a b : ℕ) : myAndNot a b = a ^^^ (a &&& b) := by
  unfold myAndNot; rw [myXor_eq_xor, myLand_eq_land]

def B812e : ComputableBisection VComputablePresentation where
  left := splitVLeft
  right := splitVRight
  left_primrec := primrec_splitVLeft
  right_primrec := primrec_splitVRight
  disjoint := splitV_disjoint
  union := splitV_union
  left_congr := fun _ _ h => splitVLeft_congr h
  right_congr := fun _ _ h => splitVRight_congr h

def Udiff (n m : ℕ) : ℕ := diffCode (canonCode n) (canonCode m)

theorem U_diff_iff_nonempty (n m : ℕ) :
    (∃ k, UX k = UX n \ UX m) ↔ (UX n \ UX m).Nonempty := by
  constructor
  · rintro ⟨k, hk⟩
    rw [← hk]; exact (U_mem_UX k).2.1
  · intro hne
    rcases U.diff_mem (U_mem_UX n) (U_mem_UX m) with hempty | hmem
    · exact absurd hempty hne.ne_empty
    · exact U_surj_UX hmem

namespace Udiff
open Domain.Recursive NeighborhoodSystem

theorem eq_diff (n m : ℕ) :
    presentedIntervals (decodeQPairList (Udiff n m)) = UX n \ UX m := by
  unfold Udiff
  exact presentedIntervals_decodeQPairList_diffCode (canonCode n) (canonCode m)

theorem primrec : Nat.Primrec (fun t : ℕ => Udiff t.unpair.1 t.unpair.2) := by
  unfold Udiff
  exact (primrec_diffCode.comp ((primrec_canonCode.comp Nat.Primrec.left).pair
    (primrec_canonCode.comp Nat.Primrec.right))).of_eq
    fun t => by simp only [unpair_pair_fst, unpair_pair_snd]

end Udiff
open Domain.Recursive NeighborhoodSystem

namespace Udiff
open Domain.Recursive NeighborhoodSystem

theorem spec {n m : ℕ} (h : ∃ k, UX k = UX n \ UX m) : UX (Udiff n m) = UX n \ UX m :=
    by
  have hUL : U.mem (presentedIntervals (decodeQPairList (Udiff n m))) := by
    rw [Udiff.eq_diff]
    obtain ⟨k, hk⟩ := h
```

```
    rw [← hk]; exact U_mem_UX k
  show presentedIntervals (decodeQPairList (canonCode (Udiff n m))) = _
  rw [presentedIntervals_decodeQPairList_canonCode, canonList_fixed hUL, Udiff.eq_diff
    ]

end Udiff
open Domain.Recursive NeighborhoodSystem

def U_isComputableDiff : IsComputableDiff UComputablePresentation where
  diffIdx := Udiff
  diffIdx_primrec := Udiff.primrec
  diffIdx_spec := Udiff.spec
  diff_computable := by
    unfold RecDecidable₂
    refine RecDecidable.of_iff (fun t => ?_)
      (recDecidable_presentedIntervals_nonempty.comp Udiff.primrec)
    show (∃ k, UX k = UX t.unpair.1 \ UX t.unpair.2) ↔ _
    rw [U_diff_iff_nonempty, ← Udiff.eq_diff]

end DomainTheory.NeighbourhoodSystems
```

splitX812e.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.Udiff

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

noncomputable def splitX812e : Set ? → Set ℕ → Set ? → Set ℕ × Set ℕ :=
  ComputableBisection.splitFromBisection UComputablePresentation U_isComputableDiff
    B812e
    V.noMinimal

namespace isComputableSplit
open Domain.Recursive NeighborhoodSystem

noncomputable def ?812e? :
    IsComputableSplit UComputablePresentation VComputablePresentation splitX812e :=
  ComputableBisection.isComputableSplit.ofBisection UComputablePresentation
    U_isComputableDiff
    B812e V.noMinimal U.isPositive U.noMinimal U.diffClosed

end isComputableSplit

end DomainTheory.NeighbourhoodSystems
end
```

BooleanAlgebraFilters.lean

```
module

public import Mathlib.Topology.Constructions
```

```
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Exercise_8_12
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    GeneratedBy

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_6
public import Mathlib.Data.Nat.Bitwise

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap
open Domain.Recursive NeighborhoodSystem
open NeighborhoodSystem

theorem exercise813a : U ≅? V := ⟨effectiveIso812_UV.toDomainIso⟩

set_option linter.unusedVariables false

theorem example_813_a : @DomainTheory.NeighbourhoodSystems.Isomorphic Rat Nat
    DomainTheory.NeighbourhoodSystems.U
  DomainTheory.NeighbourhoodSystems.V :=
  DomainTheory.NeighbourhoodSystems.exercise813a

open NeighborhoodSystem

theorem generator_nonempty (i : ℕ) : (generator i).Nonempty := ⟨2 ^ i, by simp⟩

theorem generators_independent (s : Finset ℕ) (? : ℕ → Bool) :
    (⋂ i ∈ s, if ? i then generator i else (generator i)?).Nonempty := by
  refine ⟨bitmaskOf (s.filter (fun i => ? i)), ?_⟩
  simp only [Set.mem_iInter]
  intro i hi
  split_ifs with hb <;> simp [testBit_bitmaskOf, Finset.mem_filter, hi, hb]

theorem levelSet_compl (k m : ℕ) :
    (levelSet k m)? = levelSet k (bitmaskOf ((Finset.range (2 ^ k)).filter
      (fun ? => ¬ m.testBit ?))) := by
  ext n
  simp only [Set.mem_compl_iff, mem_levelSet, testBit_bitmaskOf, Finset.mem_filter,
    Finset.mem_range]
  exact ⟨fun h => ⟨Nat.mod_lt n (Nat.two_pow_pos _), h⟩, fun h => h.2⟩

theorem V.compl_mem {X : Set ℕ} (hX : V.mem X) : X? = ∅ ∨ V.mem X? := by
  obtain ⟨k, m, rfl, -⟩ := hX
  rw [levelSet_compl]
  rcases (levelSet _ _).eq_empty_or_nonempty with h | h
  · exact Or.inl h
  · exact Or.inr ⟨k, _, rfl, h⟩

theorem testBit_mod_two_pow (n k i : ℕ) :
    (n % 2 ^ k).testBit i = (decide (i < k) && n.testBit i) := by
  have hlt : n % 2 ^ k < 2 ^ k := Nat.mod_lt n (Nat.two_pow_pos k)
  have h := Nat.testBit_two_pow_mul_add (n / 2 ^ k) hlt i
  rw [Nat.div_add_mod] at h
```

```
  rcases Nat.lt_or_ge i k with hik | hik
  · simp only [hik, ite_true, decide_true, Bool.true_and] at h ⊢
    exact h.symm
  · simp only [Nat.not_lt.mpr hik, decide_false, Bool.false_and]
    exact Nat.testBit_eq_false_of_lt (hlt.trans_le (Nat.pow_le_pow_right (by norm_num)
     hik))

theorem affine_eq_biInter (k ? : ℕ) (h? : ? < 2 ^ k) :
    affine k ? = ⋂ i ∈ Finset.range k, (if ?.testBit i then generator i else (
    generator i)?) := by
  ext n
  simp only [mem_affine, Set.mem_iInter, Finset.mem_range]
  have key : n % 2 ^ k = ? ↔ ∀ i < k, n.testBit i = ?.testBit i := by
    constructor
    · rintro rfl i hi
      rw [testBit_mod_two_pow]; simp [hi]
    · intro h
      apply Nat.eq_of_testBit_eq
      intro i
      rw [testBit_mod_two_pow]
      rcases Nat.lt_or_ge i k with hik | hik
      · simp [hik, h i hik]
      · simp only [Nat.not_lt.mpr hik, decide_false, Bool.false_and]
        exact (Nat.testBit_eq_false_of_lt (h?.trans_le (Nat.pow_le_pow_right (by
    norm_num) hik))).symm
  rw [key]
  refine forall₂_congr fun i _ => ?_
  split_ifs with hb <;> simp [hb]

theorem generatedBy_affine (k ? : ℕ) (h? : ? < 2 ^ k) : GeneratedBy generator (affine
    k ?) := by
  rw [affine_eq_biInter k ? h?]
  induction Finset.range k using Finset.induction_on with
  | empty => simpa using GeneratedBy.univ
  | insert a s _ ih =>
    rw [Finset.set_biInter_insert]
    refine GeneratedBy.inter ?_ ih
    split_ifs with hb
    · exact GeneratedBy.of _
    · exact GeneratedBy.compl (GeneratedBy.of _)

theorem generatedBy_biUnion_affine (k : ℕ) (s : Finset ℕ) (hs : ∀ ? ∈ s, ? < 2 ^ k) :
    GeneratedBy generator (⋃ ? ∈ s, affine k ?) := by
  induction s using Finset.induction_on with
  | empty => simpa using GeneratedBy.univ.compl
  | insert a s ha ih =>
    rw [Finset.set_biUnion_insert]
    exact GeneratedBy.union (generatedBy_affine k a (hs a (Finset.mem_insert_self a s)
    ))
      (ih fun ? h? => hs ? (Finset.mem_insert_of_mem h?))

theorem generatedBy_levelSet (k m : ℕ) : GeneratedBy generator (levelSet k m) := by
  rw [levelSet.eq_biUnion]
  exact generatedBy_biUnion_affine k _ fun ? h? => (Finset.mem_filter.mp h?).1 |>
    Finset.mem_range.mp
```

```
theorem testBit_mod_two_pow_succ (n i : ℕ) :
    (n % 2 ^ (i + 1)).testBit i = n.testBit i := by
  rw [testBit_mod_two_pow]; simp

theorem generator_eq_levelSet (i : ℕ) :
    generator i = levelSet (i + 1) (bitmaskOf ((Finset.range (2 ^ (i + 1))).filter
      (fun ? => ?.testBit i))) := by
  ext n
  simp only [mem_generator, mem_levelSet, testBit_bitmaskOf, Finset.mem_filter, Finset
    .mem_range]
  rw [← testBit_mod_two_pow_succ]
  exact ⟨fun h => ⟨Nat.mod_lt n (Nat.two_pow_pos _), h⟩, fun h => h.2⟩

theorem V.mem_generator (i : ℕ) : V.mem (generator i) :=
  generator_eq_levelSet i ▸ ⟨i + 1, _, rfl, generator_eq_levelSet i ▸
    generator_nonempty i⟩

theorem generatedBy_generator_imp {X : Set ℕ} (h : GeneratedBy generator X) :
    X = ∅ ∨ V.mem X := by
  induction h with
  | of i => exact Or.inr (V.mem_generator i)
  | univ => exact Or.inr V.master_mem
  | @inter X Y _ _ ih1 ih2 =>
    rcases ih1 with rfl | hX
    · exact Or.inl (Set.empty_inter Y)
    rcases ih2 with rfl | hY
    · exact Or.inl (Set.inter_empty X)
    obtain ⟨k₁, m₁, rfl, -⟩ := hX
    obtain ⟨k₂, m₂, rfl, -⟩ := hY
    rw [levelSet.inter]
    rcases (levelSet _ _).eq_empty_or_nonempty with h | h
    · exact Or.inl h
    · exact Or.inr ⟨_, _, rfl, h⟩
  | union _ _ ih1 ih2 => exact V.union_mem ih1 ih2
  | @compl X _ ih =>
    rcases ih with rfl | hX
    · simp only [Set.compl_empty]
      exact Or.inr V.master_mem
    · exact V.compl_mem hX

theorem V.mem_iff_generatedBy {X : Set ℕ} : V.mem X ↔ GeneratedBy generator X ∧ X.
    Nonempty := by
  constructor
  · rintro ⟨k, m, rfl, hne⟩
    exact ⟨generatedBy_levelSet k m, hne⟩
  · rintro ⟨hgen, hne⟩
    exact (generatedBy_generator_imp hgen).resolve_left hne.ne_empty

inductive Formula : Type
  | var (i : ℕ) : Formula
  | bot : Formula
  | top : Formula
  | neg (φ : Formula) : Formula
  | and (φ ψ : Formula) : Formula
  | or (φ ψ : Formula) : Formula
```

```
def evalSet : Formula → Set ℕ
  | .var i => generator i
  | .bot => ∅
  | .top => Set.univ
  | .neg φ => (evalSet φ)?
  | .and φ ψ => evalSet φ ∩ evalSet ψ
  | .or φ ψ => evalSet φ ∪ evalSet ψ

def evalV (v : ℕ → Bool) : Formula → Bool
  | .var i => v i
  | .bot => false
  | .top => true
  | .neg φ => !(evalV v φ)
  | .and φ ψ => evalV v φ && evalV v ψ
  | .or φ ψ => evalV v φ || evalV v ψ

def SemanticEquiv (φ ψ : Formula) : Prop := ∀ v, evalV v φ = evalV v ψ

theorem exists_bitsOf_agree (S : Finset ℕ) (v : ℕ → Bool) :
    ∃ n : ℕ, ∀ i ∈ S, n.testBit i = v i := by
  refine ⟨bitmaskOf (S.filter (fun i => v i)), fun i hi => ?_⟩
  have key : (bitmaskOf (S.filter (fun i => v i))).testBit i = true ↔ v i = true := by
    rw [testBit_bitmaskOf]; simp [Finset.mem_filter, hi]
  rcases hv : v i with - | - <;> rcases hn : (bitmaskOf (S.filter (fun i => v i))).
    testBit i
    with - | - <;> simp_all

instance formulaSetoid : Setoid Formula where
  r := SemanticEquiv
  iseqv := ⟨fun _ _ => rfl, fun h v => (h v).symm, fun h1 h2 v => (h1 v).trans (h2 v)⟩

def Lindenbaum : Type := Quotient formulaSetoid

theorem mem_evalSet_iff (n : ℕ) (φ : Formula) :
    n ∈ evalSet φ ↔ evalV (fun i => n.testBit i) φ = true := by
  induction φ with
  | var i => simp [evalSet, evalV]
  | bot => simp [evalSet, evalV]
  | top => simp [evalSet, evalV]
  | neg φ ih => simp [evalSet, evalV, ih]
  | and φ ψ ihφ ihψ => simp [evalSet, evalV, ihφ, ihψ]
  | or φ ψ ihφ ihψ => simp [evalSet, evalV, ihφ, ihψ]

def vars : Formula → Finset ℕ
  | .var i => {i}
  | .bot => ∅
  | .top => ∅
  | .neg φ => vars φ
  | .and φ ψ => vars φ ∪ vars ψ
  | .or φ ψ => vars φ ∪ vars ψ

theorem evalV_eq_of_agree {φ : Formula} {v v' : ℕ → Bool} (h : ∀ i ∈ vars φ, v i = v'
    i) :
    evalV v φ = evalV v' φ := by
  induction φ with
  | var i => exact h i (Finset.mem_singleton_self i)
```

```
  | bot => rfl
  | top => rfl
  | neg φ ih => simp only [evalV, ih h]
  | and φ ψ ihφ ihψ =>
    simp only [evalV, vars] at h ⊢
    rw [ihφ (fun i hi => h i (Finset.mem_union_left _ hi)),
      ihψ (fun i hi => h i (Finset.mem_union_right _ hi))]
  | or φ ψ ihφ ihψ =>
    simp only [evalV, vars] at h ⊢
    rw [ihφ (fun i hi => h i (Finset.mem_union_left _ hi)),
      ihψ (fun i hi => h i (Finset.mem_union_right _ hi))]

theorem semanticEquiv_iff_evalSet_eq {φ ψ : Formula} :
    SemanticEquiv φ ψ ↔ evalSet φ = evalSet ψ := by
  constructor
  · intro h
    ext n
    rw [mem_evalSet_iff, mem_evalSet_iff, h]
  · intro h v
    obtain ⟨n, hn⟩ := exists_bitsOf_agree (vars φ ∪ vars ψ) v
    have h1 : evalV v φ = evalV (fun i => n.testBit i) φ :=
      evalV_eq_of_agree fun i hi => (hn i (Finset.mem_union_left _ hi)).symm
    have h2 : evalV v ψ = evalV (fun i => n.testBit i) ψ :=
      evalV_eq_of_agree fun i hi => (hn i (Finset.mem_union_right _ hi)).symm
    have hiff : evalV (fun i => n.testBit i) φ = true ↔ evalV (fun i => n.testBit i)
    ψ = true := by
      rw [← mem_evalSet_iff, ← mem_evalSet_iff, h]
    rw [h1, h2]
    rcases hφ : evalV (fun i => n.testBit i) φ with - | - <;>
      rcases hψ : evalV (fun i => n.testBit i) ψ with - | - <;> simp_all

def Lindenbaum.toSet : Lindenbaum → Set ℕ :=
  Quotient.lift evalSet fun _ _ h => semanticEquiv_iff_evalSet_eq.mp h

@[simp] theorem Lindenbaum.toSet_mk (φ : Formula) :
    Lindenbaum.toSet ⟦φ⟧ = evalSet φ := rfl

def Entails (φ ψ : Formula) : Prop := ∀ v, evalV v φ = true → evalV v ψ = true

theorem Lindenbaum.toSet_injective : Function.Injective Lindenbaum.toSet := by
  intro x y
  induction x using Quotient.ind with
  | _ φ =>
    induction y using Quotient.ind with
    | _ ψ =>
      intro h
      exact Quotient.sound (semanticEquiv_iff_evalSet_eq.mpr h)

theorem entails_iff_evalSet_subset {φ ψ : Formula} :
    Entails φ ψ ↔ evalSet φ ⊆ evalSet ψ := by
  constructor
  · intro h n hn
    rw [mem_evalSet_iff] at hn ⊢
    exact h _ hn
  · intro h v hv
    obtain ⟨n, hn⟩ := exists_bitsOf_agree (vars φ ∪ vars ψ) v
```

```
    have h1 : evalV v φ = evalV (fun i => n.testBit i) φ :=
      evalV_eq_of_agree fun i hi => (hn i (Finset.mem_union_left _ hi)).symm
    have h2 : evalV v ψ = evalV (fun i => n.testBit i) ψ :=
      evalV_eq_of_agree fun i hi => (hn i (Finset.mem_union_right _ hi)).symm
    rw [h2, ← mem_evalSet_iff]
    exact h (by rw [mem_evalSet_iff, ← h1]; exact hv)

set_option linter.unusedVariables false

theorem example_813_b : ∀ {φ ψ : DomainTheory.NeighbourhoodSystems.Formula},
  Iff (DomainTheory.NeighbourhoodSystems.Entails φ ψ)
    (@LE.le (Set Nat) (@Set.instLE Nat) (DomainTheory.NeighbourhoodSystems.evalSet φ)
      (DomainTheory.NeighbourhoodSystems.evalSet ψ)) :=
  @DomainTheory.NeighbourhoodSystems.entails_iff_evalSet_subset

end DomainTheory.NeighbourhoodSystems
```

splitU2.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.splitU

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

namespace decodeRat
open Domain.Recursive NeighborhoodSystem

theorem foldl_ratMax (l : List ℕ) (z : ℕ) :
    decodeRat (l.foldl (fun acc x => ratMaxCode (Nat.pair acc x.unpair.2)) z)
      = (l.map decodeRatPair).foldl (fun acc p => max acc p.2) (decodeRat z) := by
  induction l generalizing z with
  | nil => rfl
  | cons a l ih =>
    rw [List.foldl_cons, List.map_cons, List.foldl_cons, ih, decodeRat_ratMaxCode]
    rfl

end decodeRat
namespace foldl
open Domain.Recursive NeighborhoodSystem

theorem maxSnd_mem_or_eq_seed (L : List (? × ?)) (seed : ?) :
    L.foldl (fun acc p => max acc p.2) seed = seed ∨
      ∃ p ∈ L, L.foldl (fun acc q => max acc q.2) seed = p.2 := by
  induction L generalizing seed with
  | nil => exact Or.inl rfl
  | cons a l ih =>
    rw [List.foldl_cons]
    rcases le_total a.2 seed with hle | hle
    · rw [max_eq_left hle]
      rcases ih seed with h | ⟨p, hp, h⟩
      · exact Or.inl h
      · exact Or.inr ⟨p, List.mem_cons_of_mem a hp, h⟩
```

```
    · rw [max_eq_right hle]
      rcases ih a.2 with h | ⟨p, hp, h⟩
      · exact Or.inr ⟨a, List.mem_cons_self .., h⟩
      · exact Or.inr ⟨p, List.mem_cons_of_mem a hp, h⟩

end foldl
open Domain.Recursive NeighborhoodSystem

theorem forall_bounds_decodeQPairList_canonCode (c : ℕ) :
    ∀ p ∈ decodeQPairList (canonCode c), 0 ≤ p.1 ∧ p.2 ≤ 1 := by
  unfold canonCode
  by_cases hz : canonListCode c = 0
  · have hzero : isZero (canonListCode c) = 1 := by rw [hz]; exact (isZero_eq_one_iff
    0).mpr rfl
    rw [hzero, selectFn_one]
    intro p hp
    rw [decodeQPairList_masterCode, List.mem_singleton] at hp
    rw [hp]; norm_num
  · have hzero : isZero (canonListCode c) = 0 := by
      by_contra hcontra
      have h1 := isZero_le_one (canonListCode c)
      exact hz ((isZero_eq_one_iff _).mp (by omega))
    rw [hzero, selectFn_zero]
    intro p hp
    obtain ⟨p0, -, -, rfl⟩ := (mem_decodeQPairList_canonListCode c p).mp hp
    exact ⟨le_sup_right, inf_le_right⟩

def listMaxSnd (L : List (? × ?)) : ? := L.foldl (fun acc p => max acc p.2) 0

def listMinFst (L : List (? × ?)) : ? := L.foldl (fun acc p => min acc p.1) 1

namespace decodeRat
open Domain.Recursive NeighborhoodSystem

theorem foldl_ratMin (l : List ℕ) (z : ℕ) :
    decodeRat (l.foldl (fun acc x => ratMinCode (Nat.pair acc x.unpair.1)) z)
      = (l.map decodeRatPair).foldl (fun acc p => min acc p.1) (decodeRat z) := by
  induction l generalizing z with
  | nil => rfl
  | cons a l ih =>
    rw [List.foldl_cons, List.map_cons, List.foldl_cons, ih, decodeRat_ratMinCode]
    rfl

end decodeRat
namespace foldl
open Domain.Recursive NeighborhoodSystem

theorem maxSnd_seed_le (L : List (? × ?)) (seed : ?) :
    seed ≤ L.foldl (fun acc p => max acc p.2) seed := by
  induction L generalizing seed with
  | nil => exact le_refl seed
  | cons a l ih =>
    rw [List.foldl_cons]
    exact (le_max_left seed a.2).trans (ih (max seed a.2))

end foldl
```

```
open Domain.Recursive NeighborhoodSystem

def listMaxSndCode (c : ℕ) : ℕ :=
  foldCode (fun t => ratMaxCode (Nat.pair t.unpair.2.unpair.1 t.unpair.1.unpair.2)) 0
    zeroCode c

namespace decodeRat
open Domain.Recursive NeighborhoodSystem

theorem listMaxSndCode (c : ℕ) :
    decodeRat (_root_.DomainTheory.NeighbourhoodSystems.listMaxSndCode c) = listMaxSnd
     (decodeQPairList c) := by
  unfold _root_.DomainTheory.NeighbourhoodSystems.listMaxSndCode listMaxSnd
    decodeQPairList
  rw [foldCode_eq']
  have hstep : (fun (acc x : ℕ) =>
      (fun t : ℕ => ratMaxCode (Nat.pair t.unpair.2.unpair.1 t.unpair.1.unpair.2))
        (Nat.pair x (Nat.pair acc 0)))
      = (fun acc x : ℕ => ratMaxCode (Nat.pair acc x.unpair.2)) := by
    funext acc x; simp only [unpair_pair_fst, unpair_pair_snd]
  rw [hstep, decodeRat.foldl_ratMax, decodeRat_zeroCode]

end decodeRat
namespace foldl
open Domain.Recursive NeighborhoodSystem

theorem maxSnd_ge (L : List (? × ?)) (seed : ?) (p : ? × ?) (hp : p ∈ L) :
    p.2 ≤ L.foldl (fun acc q => max acc q.2) seed := by
  induction L generalizing seed with
  | nil => cases hp
  | cons a l ih =>
    rw [List.foldl_cons]
    rcases List.mem_cons.mp hp with rfl | hp'
    · exact (le_max_right seed p.2).trans (foldl.maxSnd_seed_le l (max seed p.2))
    · exact ih (max seed a.2) hp'

end foldl
namespace listMaxSnd
open Domain.Recursive NeighborhoodSystem

theorem ge {L : List (? × ?)} {p : ? × ?} (hp : p ∈ L) : p.2 ≤ listMaxSnd L :=
  foldl.maxSnd_ge L 0 p hp

theorem attained {L : List (? × ?)} (hne : L = []) (hlb : ∀ p ∈ L, 0 < p.2) :
    ∃ p ∈ L, p.2 = listMaxSnd L := by
  rcases foldl.maxSnd_mem_or_eq_seed L 0 with h1 | ⟨p, hp, h1⟩
  · obtain ⟨p0, hp0⟩ := List.exists_mem_of_ne_nil L hne
    exact absurd (h1 ▸ listMaxSnd.ge hp0) (not_le.mpr (hlb p0 hp0))
  · exact ⟨p, hp, h1.symm⟩

end listMaxSnd
open Domain.Recursive NeighborhoodSystem

def listMinFstCode (c : ℕ) : ℕ :=
  foldCode (fun t => ratMinCode (Nat.pair t.unpair.2.unpair.1 t.unpair.1.unpair.1)) 0
    oneCode c
```

```
namespace decodeRat
open Domain.Recursive NeighborhoodSystem

theorem listMinFstCode (c : ℕ) :
    decodeRat (_root_.DomainTheory.NeighbourhoodSystems.listMinFstCode c) = listMinFst
     (decodeQPairList c) := by
  unfold _root_.DomainTheory.NeighbourhoodSystems.listMinFstCode listMinFst
    decodeQPairList
  rw [foldCode_eq']
  have hstep : (fun (acc x : ℕ) =>
      (fun t : ℕ => ratMinCode (Nat.pair t.unpair.2.unpair.1 t.unpair.1.unpair.1))
        (Nat.pair x (Nat.pair acc 0)))
      = (fun acc x : ℕ => ratMinCode (Nat.pair acc x.unpair.1)) := by
    funext acc x; simp only [unpair_pair_fst, unpair_pair_snd]
  rw [hstep, decodeRat.foldl_ratMin, decodeRat_oneCode]

end decodeRat
namespace foldl
open Domain.Recursive NeighborhoodSystem

theorem minFst_le_seed (L : List (? × ?)) (seed : ?) :
    L.foldl (fun acc p => min acc p.1) seed ≤ seed := by
  induction L generalizing seed with
  | nil => exact le_refl seed
  | cons a l ih =>
    rw [List.foldl_cons]
    exact (ih (min seed a.1)).trans (min_le_left seed a.1)

end foldl
namespace listMaxSnd
open Domain.Recursive NeighborhoodSystem

theorem tight {L : List (? × ?)} (hne : L = [])
    (hpos : ∀ p ∈ L, p.1 < p.2) (hb : ∀ p ∈ L, 0 ≤ p.1 ∧ p.2 ≤ 1) {y : ?}
    (hy : y < listMaxSnd L) : ∃ x ∈ presentedIntervals L, y < x := by
  have hlb : ∀ p ∈ L, 0 < p.2 := fun p hp => lt_of_le_of_lt (hb p hp).1 (hpos p hp)
  obtain ⟨p, hp, hpeq⟩ := listMaxSnd.attained hne hlb
  rw [← hpeq] at hy
  rcases lt_or_ge y p.1 with hlt | hge
  · exact ⟨p.1, presentedIntervals.mem.mpr ⟨p, hp, le_refl _, hpos p hp⟩, hlt⟩
  · exact ⟨(y + p.2) / 2, presentedIntervals.mem.mpr ⟨p, hp, hge.trans (
    left_lt_add_div_two.mpr hy).le,
      add_div_two_lt_right.mpr hy⟩, left_lt_add_div_two.mpr hy⟩

end listMaxSnd
open Domain.Recursive NeighborhoodSystem

def splitU2MidCode (n : ℕ) : ℕ :=
  ratMidCode (Nat.pair (listMinFstCode (canonCode n)) (listMaxSndCode (canonCode n)))

namespace decodeRat
open Domain.Recursive NeighborhoodSystem

theorem splitU2MidCode (n : ℕ) :
    decodeRat (_root_.DomainTheory.NeighbourhoodSystems.splitU2MidCode n) =
```

```
      (listMinFst (decodeQPairList (canonCode n)) + listMaxSnd (decodeQPairList (
    canonCode n)))
        / 2 := by
  unfold _root_.DomainTheory.NeighbourhoodSystems.splitU2MidCode
  rw [decodeRat_ratMidCode', unpair_pair_fst, unpair_pair_snd, decodeRat.
    listMinFstCode,
    decodeRat.listMaxSndCode]

end decodeRat
namespace foldl
open Domain.Recursive NeighborhoodSystem

theorem minFst_le (L : List (? × ?)) (seed : ?) (p : ? × ?) (hp : p ∈ L) :
    L.foldl (fun acc q => min acc q.1) seed ≤ p.1 := by
  induction L generalizing seed with
  | nil => cases hp
  | cons a l ih =>
    rw [List.foldl_cons]
    rcases List.mem_cons.mp hp with rfl | hp'
    · exact (foldl.minFst_le_seed l (min seed p.1)).trans (min_le_right seed p.1)
    · exact ih (min seed a.1) hp'

end foldl
namespace listMinFst
open Domain.Recursive NeighborhoodSystem

theorem le {L : List (? × ?)} {p : ? × ?} (hp : p ∈ L) : listMinFst L ≤ p.1 :=
  foldl.minFst_le L 1 p hp

end listMinFst
namespace splitU2
open Domain.Recursive NeighborhoodSystem

theorem min_lt_max (n : ℕ) :
    listMinFst (decodeQPairList (canonCode n)) < listMaxSnd (decodeQPairList (
    canonCode n)) := by
  obtain ⟨p, hp⟩ := List.exists_mem_of_ne_nil _ (decodeQPairList_canonCode_ne_nil n)
  exact lt_of_le_of_lt (listMinFst.le hp)
    (lt_of_lt_of_le (forall_lt_decodeQPairList_canonCode n p hp) (listMaxSnd.ge hp))

theorem mid_lt_max (n : ℕ) :
    decodeRat (splitU2MidCode n) < listMaxSnd (decodeQPairList (canonCode n)) := by
  rw [decodeRat.splitU2MidCode]; exact add_div_two_lt_right.mpr (splitU2.min_lt_max n)

theorem min_lt_mid (n : ℕ) :
    listMinFst (decodeQPairList (canonCode n)) < decodeRat (splitU2MidCode n) := by
  rw [decodeRat.splitU2MidCode]; exact left_lt_add_div_two.mpr (splitU2.min_lt_max n)

end splitU2
namespace listMaxSnd
open Domain.Recursive NeighborhoodSystem

theorem upper_bound {L : List (? × ?)} {x : ?} (hx : x ∈ presentedIntervals L) :
    x < listMaxSnd L := by
  obtain ⟨p, hp, -, hx2⟩ := presentedIntervals.mem.mp hx
  exact hx2.trans_le (listMaxSnd.ge hp)
```

```
end listMaxSnd
namespace listMinFst
open Domain.Recursive NeighborhoodSystem

theorem lower_bound {L : List (? × ?)} {x : ?} (hx : x ∈ presentedIntervals L) :
    listMinFst L ≤ x := by
  obtain ⟨p, hp, hx1, -⟩ := _root_.DomainTheory.NeighbourhoodSystems.presentedIntervals
    .mem.mp hx
  exact (listMinFst.le hp).trans hx1

end listMinFst
open Domain.Recursive NeighborhoodSystem

def splitU2Left (n : ℕ) : ℕ := clipLtListCode (splitU2MidCode n) (canonCode n)

namespace foldl
open Domain.Recursive NeighborhoodSystem

theorem minFst_mem_or_eq_seed (L : List (? × ?)) (seed : ?) :
    L.foldl (fun acc p => min acc p.1) seed = seed ∨
      ∃ p ∈ L, L.foldl (fun acc q => min acc q.1) seed = p.1 := by
  induction L generalizing seed with
  | nil => exact Or.inl rfl
  | cons a l ih =>
    rw [List.foldl_cons]
    rcases le_total seed a.1 with hle | hle
    · rw [min_eq_left hle]
      rcases ih seed with h | ⟨p, hp, h⟩
      · exact Or.inl h
      · exact Or.inr ⟨p, List.mem_cons_of_mem a hp, h⟩
    · rw [min_eq_right hle]
      rcases ih a.1 with h | ⟨p, hp, h⟩
      · exact Or.inr ⟨a, List.mem_cons_self .., h⟩
      · exact Or.inr ⟨p, List.mem_cons_of_mem a hp, h⟩

end foldl
namespace listMinFst
open Domain.Recursive NeighborhoodSystem

theorem attained {L : List (? × ?)} (hne : L = []) (hub : ∀ p ∈ L, p.1 < 1) :
    ∃ p ∈ L, p.1 = listMinFst L := by
  rcases foldl.minFst_mem_or_eq_seed L 1 with h1 | ⟨p, hp, h1⟩
  · obtain ⟨p0, hp0⟩ := List.exists_mem_of_ne_nil L hne
    exact absurd (h1 ▸ listMinFst.le hp0) (not_le.mpr (hub p0 hp0))
  · exact ⟨p, hp, h1.symm⟩

end listMinFst
namespace listMaxSnd
open Domain.Recursive NeighborhoodSystem

theorem congr {L1 L2 : List (? × ?)} (hne1 : L1 = []) (hne2 : L2 = [])
    (hpos1 : ∀ p ∈ L1, p.1 < p.2) (hb1 : ∀ p ∈ L1, 0 ≤ p.1 ∧ p.2 ≤ 1)
    (hpos2 : ∀ p ∈ L2, p.1 < p.2) (hb2 : ∀ p ∈ L2, 0 ≤ p.1 ∧ p.2 ≤ 1)
    (heq : presentedIntervals L1 = presentedIntervals L2) :
    listMaxSnd L1 = listMaxSnd L2 := by
```

```
  by_contra hne
  rcases lt_or_gt_of_ne hne with hlt | hlt
  · obtain ⟨x, hx, hyx⟩ := listMaxSnd.tight hne2 hpos2 hb2 hlt
    have hx1 : x ∈ presentedIntervals L1 := heq.symm ▸ hx
    exact absurd (listMaxSnd.upper_bound hx1) (not_lt.mpr hyx.le)
  · obtain ⟨x, hx, hyx⟩ := listMaxSnd.tight hne1 hpos1 hb1 hlt
    have hx2 : x ∈ presentedIntervals L2 := heq ▸ hx
    exact absurd (listMaxSnd.upper_bound hx2) (not_lt.mpr hyx.le)

end listMaxSnd
namespace listMinFst
open Domain.Recursive NeighborhoodSystem

theorem presentedIntervals.mem {L : List (? × ?)} (hne : L = [])
    (hpos : ∀ p ∈ L, p.1 < p.2) (hb : ∀ p ∈ L, 0 ≤ p.1 ∧ p.2 ≤ 1) :
    listMinFst L ∈ presentedIntervals L := by
  have hub : ∀ p ∈ L, p.1 < 1 := fun p hp => (hpos p hp).trans_le (hb p hp).2
  obtain ⟨p, hp, hpeq⟩ := listMinFst.attained hne hub
  exact _root_.DomainTheory.NeighbourhoodSystems.presentedIntervals.mem.mpr ⟨p, hp,
    hpeq.le, hpeq ▸ hpos p hp⟩

theorem congr {L1 L2 : List (? × ?)} (hne1 : L1 = []) (hne2 : L2 = [])
    (hpos1 : ∀ p ∈ L1, p.1 < p.2) (hb1 : ∀ p ∈ L1, 0 ≤ p.1 ∧ p.2 ≤ 1)
    (hpos2 : ∀ p ∈ L2, p.1 < p.2) (hb2 : ∀ p ∈ L2, 0 ≤ p.1 ∧ p.2 ≤ 1)
    (heq : presentedIntervals L1 = presentedIntervals L2) :
    listMinFst L1 = listMinFst L2 := by
  have hm1 : listMinFst L1 ∈ presentedIntervals L2 :=
    heq ▸ listMinFst.presentedIntervals.mem hne1 hpos1 hb1
  have hm2 : listMinFst L2 ∈ presentedIntervals L1 :=
    heq ▸ listMinFst.presentedIntervals.mem hne2 hpos2 hb2
  exact le_antisymm (listMinFst.lower_bound hm2) (listMinFst.lower_bound hm1)

end listMinFst
open Domain.Recursive NeighborhoodSystem

theorem splitU2MidCode_congr {n n' : ℕ} (h : UX n = UX n') :
    decodeRat (splitU2MidCode n) = decodeRat (splitU2MidCode n') := by
  have heqP : presentedIntervals (decodeQPairList (canonCode n))
      = presentedIntervals (decodeQPairList (canonCode n')) := h
  have hminEq := listMinFst.congr (decodeQPairList_canonCode_ne_nil n)
    (decodeQPairList_canonCode_ne_nil n') (forall_lt_decodeQPairList_canonCode n)
    (forall_bounds_decodeQPairList_canonCode n) (forall_lt_decodeQPairList_canonCode n
    ')
    (forall_bounds_decodeQPairList_canonCode n') heqP
  have hmaxEq := listMaxSnd.congr (decodeQPairList_canonCode_ne_nil n)
    (decodeQPairList_canonCode_ne_nil n') (forall_lt_decodeQPairList_canonCode n)
    (forall_bounds_decodeQPairList_canonCode n) (forall_lt_decodeQPairList_canonCode n
    ')
    (forall_bounds_decodeQPairList_canonCode n') heqP
  rw [decodeRat.splitU2MidCode, decodeRat.splitU2MidCode, hminEq, hmaxEq]

def splitU2Right (n : ℕ) : ℕ := clipGeListCode (splitU2MidCode n) (canonCode n)

theorem UX_splitU2Right (n : ℕ) :
    UX (splitU2Right n) = UX n ∩ Set.Ici (decodeRat (splitU2MidCode n)) := by
  have hUL : U.mem (presentedIntervals (decodeQPairList (splitU2Right n))) := by
```

```
    show U.mem
      (presentedIntervals (decodeQPairList (clipGeListCode (splitU2MidCode n) (
    canonCode n))))
    rw [presentedIntervals_decodeQPairList_clipGeListCode]
    refine ⟨⟨(decodeQPairList (canonCode n)).map (qpClipGe (decodeRat (splitU2MidCode n
    ))),
      (presentedIntervals_map_qpClipGe _ _).symm⟩, ?_, ?_⟩
    · obtain ⟨x, hx, hxgt⟩ := listMaxSnd.tight (decodeQPairList_canonCode_ne_nil n)
        (forall_lt_decodeQPairList_canonCode n) (
    forall_bounds_decodeQPairList_canonCode n)
        (splitU2.mid_lt_max n)
      exact ⟨x, hx, hxgt.le⟩
    · exact Set.inter_subset_left.trans (U_mem_UX n).2.2
  show presentedIntervals (decodeQPairList (canonCode (splitU2Right n))) = _
  rw [presentedIntervals_decodeQPairList_canonCode, canonList_fixed hUL]
  show presentedIntervals (decodeQPairList (clipGeListCode (splitU2MidCode n) (
    canonCode n))) = _
  rw [presentedIntervals_decodeQPairList_clipGeListCode]
  rfl

theorem splitU2Right_congr {n n' : ℕ} (h : UX n = UX n') :
    UX (splitU2Right n) = UX (splitU2Right n') := by
  rw [UX_splitU2Right, UX_splitU2Right, h, splitU2MidCode_congr h]

theorem UX_splitU2Left (n : ℕ) :
    UX (splitU2Left n) = UX n ∩ Set.Iio (decodeRat (splitU2MidCode n)) := by
  have hUL : U.mem (presentedIntervals (decodeQPairList (splitU2Left n))) := by
    show U.mem
      (presentedIntervals (decodeQPairList (clipLtListCode (splitU2MidCode n) (
    canonCode n))))
    rw [presentedIntervals_decodeQPairList_clipLtListCode]
    refine ⟨⟨(decodeQPairList (canonCode n)).map (qpClipLt (decodeRat (splitU2MidCode n
    ))),
      (presentedIntervals_map_qpClipLt _ _).symm⟩, ?_, ?_⟩
    · refine ⟨listMinFst (decodeQPairList (canonCode n)), ?_, splitU2.min_lt_mid n⟩
      exact listMinFst.presentedIntervals.mem (decodeQPairList_canonCode_ne_nil n)
        (forall_lt_decodeQPairList_canonCode n) (
    forall_bounds_decodeQPairList_canonCode n)
    · exact Set.inter_subset_left.trans (U_mem_UX n).2.2
  show presentedIntervals (decodeQPairList (canonCode (splitU2Left n))) = _
  rw [presentedIntervals_decodeQPairList_canonCode, canonList_fixed hUL]
  show presentedIntervals (decodeQPairList (clipLtListCode (splitU2MidCode n) (
    canonCode n))) = _
  rw [presentedIntervals_decodeQPairList_clipLtListCode]
  rfl

namespace splitU2
open Domain.Recursive NeighborhoodSystem

theorem disjoint (n : ℕ) : UX (splitU2Left n) ∩ UX (splitU2Right n) = ∅ := by
  rw [UX_splitU2Left, UX_splitU2Right]


  ext x
  simp only [Set.mem_inter_iff, Set.mem_Iio, Set.mem_Ici, Set.mem_empty_iff_false,
    iff_false]
  rintro ⟨⟨-, h1⟩, -, h2⟩
```

```
  exact absurd h1 (not_lt.mpr h2)

theorem union (n : ℕ) : UX (splitU2Left n) ∪ UX (splitU2Right n) = UX n := by
  rw [UX_splitU2Left, UX_splitU2Right]
  ext x
  simp only [Set.mem_union, Set.mem_inter_iff, Set.mem_Iio, Set.mem_Ici]
  constructor
  · rintro (⟨h, -⟩ | ⟨h, -⟩) <;> exact h
  · intro h
    rcases lt_or_ge x (decodeRat (splitU2MidCode n)) with hlt | hge
    · exact Or.inl ⟨h, hlt⟩
    · exact Or.inr ⟨h, hge⟩

end splitU2
open Domain.Recursive NeighborhoodSystem

theorem splitU2Left_congr {n n' : ℕ} (h : UX n = UX n') :
    UX (splitU2Left n) = UX (splitU2Left n') := by
  rw [UX_splitU2Left, UX_splitU2Left, h, splitU2MidCode_congr h]

theorem zero_le_listMaxSnd (L : List (? × ?)) : 0 ≤ listMaxSnd L := foldl.
    maxSnd_seed_le L 0

namespace primrec
open Domain.Recursive NeighborhoodSystem

theorem listMaxSndCode : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.
    listMaxSndCode := by
  have hstp : Nat.Primrec
      (fun t : ℕ => ratMaxCode (Nat.pair t.unpair.2.unpair.1 t.unpair.1.unpair.2)) :=
    (primrec_ratMaxCode.comp ((Nat.Primrec.left.comp Nat.Primrec.right).pair
      (Nat.Primrec.right.comp Nat.Primrec.left))).of_eq fun _ => rfl
  exact (primrec_foldCode hstp (Nat.Primrec.const 0) (Nat.Primrec.const zeroCode)
    primrec_id).of_eq
    fun _ => rfl

theorem listMinFstCode : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.
    listMinFstCode := by
  have hstp : Nat.Primrec
      (fun t : ℕ => ratMinCode (Nat.pair t.unpair.2.unpair.1 t.unpair.1.unpair.1)) :=
    (primrec_ratMinCode.comp ((Nat.Primrec.left.comp Nat.Primrec.right).pair
      (Nat.Primrec.left.comp Nat.Primrec.left))).of_eq fun _ => rfl
  exact (primrec_foldCode hstp (Nat.Primrec.const 0) (Nat.Primrec.const oneCode)
    primrec_id).of_eq
    fun _ => rfl

theorem splitU2MidCode : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.
    splitU2MidCode :=
  (primrec_ratMidCode.comp
    ((primrec.listMinFstCode.comp primrec_canonCode).pair
      (primrec.listMaxSndCode.comp primrec_canonCode))).of_eq fun n => by
    simp only [_root_.DomainTheory.NeighbourhoodSystems.splitU2MidCode]

theorem splitU2Left : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.splitU2Left
    :=
  (primrec_clipLtListCode.comp (primrec.splitU2MidCode.pair primrec_canonCode)).of_eq
```

```
    fun n => by simp only [_root_.DomainTheory.NeighbourhoodSystems.splitU2Left,
    unpair_pair_fst, unpair_pair_snd]

theorem splitU2Right : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.
    splitU2Right :=
  (primrec_clipGeListCode.comp (primrec.splitU2MidCode.pair primrec_canonCode)).of_eq
    fun n => by simp only [_root_.DomainTheory.NeighbourhoodSystems.splitU2Right,
    unpair_pair_fst, unpair_pair_snd]

end primrec

namespace listMinFst
open Domain.Recursive NeighborhoodSystem

theorem le_one (L : List (? × ?)) : listMinFst L ≤ 1 := foldl.minFst_le_seed L 1

end listMinFst

end DomainTheory.NeighbourhoodSystems
```

UBisection2.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.splitU2
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    ComputableBisection

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

def UBisection2 : ComputableBisection UComputablePresentation where
  left := splitU2Left
  right := splitU2Right
  left_primrec := primrec.splitU2Left
  right_primrec := primrec.splitU2Right
  disjoint := splitU2.disjoint
  union := splitU2.union
  left_congr := fun _ _ h => splitU2Left_congr h
  right_congr := fun _ _ h => splitU2Right_congr h

end DomainTheory.NeighbourhoodSystems
```

Vdiff.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    UBisection2
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    splitX812e

@[expose] public section
```

```
namespace DomainTheory.NeighbourhoodSystems

def Vdiff (n m : ℕ) : ℕ := canonIdx (VdiffRaw n m)

namespace levelSet
open Domain.Recursive NeighborhoodSystem

theorem diff_same_level (k m₁ m₂ : ℕ) :
    levelSet k m₁ \ levelSet k m₂ = levelSet k (m₁ ^^^ (m₁ &&& m₂)) := by
  ext n; simp [levelSet]

theorem myDiff (k1 m1 k2 m2 : ℕ) :
    levelSet k1 m1 \ levelSet k2 m2
      = levelSet (max k1 k2) (myAndNot (_root_.DomainTheory.NeighbourhoodSystems.
    myUpsample k1 (max k1 k2) m1) (_root_.DomainTheory.NeighbourhoodSystems.myUpsample
    k2 (max k1 k2) m2)) := by
  conv_lhs => rw [← levelSet.myUpsample (Nat.le_max_left k1 k2) (m := m1),
    ← levelSet.myUpsample (Nat.le_max_right k1 k2) (m := m2)]
  rw [levelSet.diff_same_level, myAndNot_eq]

theorem VdiffRaw (n m : ℕ) :
    levelSet (_root_.DomainTheory.NeighbourhoodSystems.VdiffRaw n m).unpair.1 (_root_.
    DomainTheory.NeighbourhoodSystems.VdiffRaw n m).unpair.2 = VX n \ VX m := by
  unfold _root_.DomainTheory.NeighbourhoodSystems.VdiffRaw
  rw [unpair_pair_fst, unpair_pair_snd]
  exact (levelSet.myDiff (canonIdx n).unpair.1 (canonIdx n).unpair.2
    (canonIdx m).unpair.1 (canonIdx m).unpair.2).symm

end levelSet
namespace Vdiff
open Domain.Recursive NeighborhoodSystem

theorem iff_nonempty (n m : ℕ) :
    (∃ k, VX k = VX n \ VX m) ↔ (VX n \ VX m).Nonempty := by
  constructor
  · rintro ⟨k, hk⟩
    rw [← hk]; exact VX_nonempty k
  · intro hne
    rw [← levelSet.VdiffRaw] at hne
    have hVmem : V.mem (VX n \ VX m) := by
      rw [← levelSet.VdiffRaw]
      exact ⟨(VdiffRaw n m).unpair.1, (VdiffRaw n m).unpair.2, rfl, hne⟩
    obtain ⟨k, hk⟩ := V.surj_VX hVmem
    exact ⟨k, hk⟩

theorem spec {n m : ℕ} (h : ∃ k, VX k = VX n \ VX m) : VX (Vdiff n m) = VX n \ VX m :=
     by
  have hne : (levelSet (VdiffRaw n m).unpair.1 (VdiffRaw n m).unpair.2).Nonempty := by
    rw [levelSet.VdiffRaw]; obtain ⟨k, hk⟩ := h; rw [← hk]; exact VX_nonempty k
  unfold Vdiff
  rw [VX_canonIdx]
  show levelSet (canonIdx (VdiffRaw n m)).unpair.1 (canonIdx (VdiffRaw n m)).unpair.2
    = VX n \ VX m
  rw [canonIdx.eq_self_of_nonempty hne, levelSet.VdiffRaw]

end Vdiff
```

```
namespace primrec
open Domain.Recursive NeighborhoodSystem

theorem lowXor : Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.lowXor
     t.unpair.1 t.unpair.2) :=
  (primrec_mod2.comp
    (primrec_add₂ (primrec_mod2.comp Nat.Primrec.left) (primrec_mod2.comp Nat.Primrec.
    right))).of_eq
    fun _ => rfl

theorem xorStep : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.xorStep := by
  have hA : Nat.Primrec (fun s : ℕ => s.unpair.1.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.left
  have hB : Nat.Primrec (fun s : ℕ => s.unpair.1.unpair.2) := Nat.Primrec.right.comp
    Nat.Primrec.left
  have hW : Nat.Primrec (fun s : ℕ => s.unpair.2.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.right
  have hAcc : Nat.Primrec (fun s : ℕ => s.unpair.2.unpair.2) := Nat.Primrec.right.comp
     Nat.Primrec.right
  have hlow : Nat.Primrec (fun s : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    lowXor s.unpair.1.unpair.1 s.unpair.1.unpair.2) :=
    (primrec.lowXor.comp (hA.pair hB)).of_eq fun s => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  exact (((primrec_div2.comp hA).pair (primrec_div2.comp hB)).pair
    ((primrec_mul₂ (Nat.Primrec.const 2) hW).pair
      (primrec_add₂ hAcc (primrec_mul₂ hW hlow)))).of_eq fun _ => rfl

theorem myXor : Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.myXor t
    .unpair.1 t.unpair.2) := by
  have hbase : Nat.Primrec
      (fun z => Nat.pair (Nat.pair z.unpair.1 z.unpair.2) (Nat.pair 1 0)) :=
    (Nat.Primrec.left.pair Nat.Primrec.right).pair
      ((Nat.Primrec.const 1).pair (Nat.Primrec.const 0))
  have hstep : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.xorStep
    w.unpair.2.unpair.2) :=
    primrec.xorStep.comp (Nat.Primrec.right.comp Nat.Primrec.right)
  have hprec := Nat.Primrec.prec hbase hstep
  have hcount : Nat.Primrec (fun t => t.unpair.1 + t.unpair.2) :=
    primrec_add₂ Nat.Primrec.left Nat.Primrec.right
  refine ((Nat.Primrec.right.comp Nat.Primrec.right).comp
    (hprec.comp (primrec_id.pair hcount))).of_eq fun t => ?_
  simp only [Nat.unpaired, unpair_pair_fst, unpair_pair_snd, id_eq]
  rw [rec_const_iterate]
  rfl

theorem myAndNot : Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.
    myAndNot t.unpair.1 t.unpair.2) := by
  have hland : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    myLand t.unpair.1 t.unpair.2) := primrec.myLand
  exact (primrec.myXor.comp (Nat.Primrec.left.pair hland)).of_eq fun t => by
    simp only [_root_.DomainTheory.NeighbourhoodSystems.myAndNot, unpair_pair_fst,
    unpair_pair_snd]

theorem VdiffRaw : Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.
    VdiffRaw t.unpair.1 t.unpair.2) := by
  have hcn : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
```

```
    canonIdx t.unpair.1) := primrec.canonIdx.comp Nat.Primrec.left
  have hcm : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.2) := primrec.canonIdx.comp Nat.Primrec.right
  have hk1 : Nat.Primrec (fun t : ℕ => (_root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.1).unpair.1) := Nat.Primrec.left.comp hcn
  have hm1 : Nat.Primrec (fun t : ℕ => (_root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.1).unpair.2) := Nat.Primrec.right.comp hcn
  have hk2 : Nat.Primrec (fun t : ℕ => (_root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.2).unpair.1) := Nat.Primrec.left.comp hcm
  have hm2 : Nat.Primrec (fun t : ℕ => (_root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.2).unpair.2) := Nat.Primrec.right.comp hcm
  have hkJ : Nat.Primrec (fun t : ℕ => max (_root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.1).unpair.1 (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.
    unpair.2).unpair.1) :=
     primrec_max hk1 hk2
  have hup1 : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    myUpsample (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1
       (max (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1 (
    _root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1)
       (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.2) :=
     (primrec.myUpsample.comp (hk1.pair (hkJ.pair hm1))).of_eq fun t => by
       simp only [unpair_pair_fst, unpair_pair_snd]
  have hup2 : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    myUpsample (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1
       (max (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1 (
    _root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1)
       (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.2) :=
     (primrec.myUpsample.comp (hk2.pair (hkJ.pair hm2))).of_eq fun t => by
       simp only [unpair_pair_fst, unpair_pair_snd]
  have handnot : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    myAndNot
       (_root_.DomainTheory.NeighbourhoodSystems.myUpsample (_root_.DomainTheory.
    NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1
          (max (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1 (
    _root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1) (_root_.
    DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.2)
       (_root_.DomainTheory.NeighbourhoodSystems.myUpsample (_root_.DomainTheory.
    NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1
          (max (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1 (
    _root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1) (_root_.
    DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.2)) :=
     (primrec.myAndNot.comp (hup1.pair hup2)).of_eq fun t => by
       simp only [unpair_pair_fst, unpair_pair_snd]
  exact (hkJ.pair handnot).of_eq fun _ => rfl

end primrec
open Domain.Recursive NeighborhoodSystem

theorem V.diff_computable : RecDecidable₂ (fun n m => ∃ k, VX k = VX n \ VX m) := by
  have hvr : Nat.Primrec (fun t : ℕ => VdiffRaw t.unpair.1 t.unpair.2) := primrec.
    VdiffRaw
  have hfprim : Nat.Primrec (fun t : ℕ => myLevelSetNonempty (VdiffRaw t.unpair.1 t.
    unpair.2).unpair.1
       (VdiffRaw t.unpair.1 t.unpair.2).unpair.2) :=
     (primrec.myLevelSetNonempty.comp ((Nat.Primrec.left.comp hvr).pair
       (Nat.Primrec.right.comp hvr))).of_eq fun t => by simp only [unpair_pair_fst,
```

```
    unpair_pair_snd]
  refine RecDecidable₂.of_paired_zero_one_char hfprim ?_ ?_
  · intro t
    have := myLevelSetNonempty.le_one (VdiffRaw t.unpair.1 t.unpair.2).unpair.1
      (VdiffRaw t.unpair.1 t.unpair.2).unpair.2
    omega
  · intro n m
    rw [unpair_pair_fst, unpair_pair_snd, Vdiff.iff_nonempty, ← levelSet.VdiffRaw,
      myLevelSetNonempty.eq_one_iff]

namespace primrec
open Domain.Recursive NeighborhoodSystem

theorem Vdiff : Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.Vdiff t
    .unpair.1 t.unpair.2) :=
  (primrec.canonIdx.comp primrec.VdiffRaw).of_eq fun _ => rfl

end primrec
open Domain.Recursive NeighborhoodSystem

def V.isComputableDiff : IsComputableDiff VComputablePresentation where
  diffIdx := Vdiff
  diffIdx_primrec := primrec.Vdiff
  diffIdx_spec := Vdiff.spec
  diff_computable := V.diff_computable

noncomputable def splitX812f : Set ℕ → Set ? → Set ℕ → Set ? × Set ? :=
  ComputableBisection.splitFromBisection VComputablePresentation V.isComputableDiff
    UBisection2
    U.noMinimal

namespace isComputableSplit
open Domain.Recursive NeighborhoodSystem

noncomputable def ?812f? :
    IsComputableSplit VComputablePresentation UComputablePresentation splitX812f :=
  ComputableBisection.isComputableSplit.ofBisection VComputablePresentation V.
    isComputableDiff
    UBisection2 U.noMinimal V.isPositive V.noMinimal V.diffClosed

end isComputableSplit

end DomainTheory.NeighbourhoodSystems
```

Vunion.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.Vdiff
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableUnion

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
```

```
open Domain.Recursive NeighborhoodSystem

def Uunion (n m : ℕ) : ℕ := appendListCode (canonCode n) (canonCode m)

def Vunion (n m : ℕ) : ℕ := canonIdx (VunionRaw n m)

theorem UX_zero : UX 0 = U.master := by
  rw [UX_eq]
  have hL : decodeQPairList 0 = [] := by
    unfold decodeQPairList; rw [decodeList_zero]; rfl
  rw [hL, canonList_eq_of_filter_eq_nil (by simp), presentedIntervals.cons,
    presentedIntervals.nil,
    Set.union_empty]
  rfl

namespace Uunion
open Domain.Recursive NeighborhoodSystem

theorem primrec : Nat.Primrec (fun t : ℕ => Uunion t.unpair.1 t.unpair.2) := by
  unfold Uunion
  exact (primrec_appendListCode.comp ((primrec_canonCode.comp Nat.Primrec.left).pair
    (primrec_canonCode.comp Nat.Primrec.right))).of_eq
    fun t => by simp only [unpair_pair_fst, unpair_pair_snd]

end Uunion
open Domain.Recursive NeighborhoodSystem

theorem V.master_nonempty : V.master.Nonempty := Set.univ_nonempty

theorem U_master_nonempty : U.master.Nonempty := ⟨0, by norm_num [U]⟩

namespace Uunion
open Domain.Recursive NeighborhoodSystem

theorem eq_union (n m : ℕ) :
    presentedIntervals (decodeQPairList (Uunion n m)) = UX n ∪ UX m := by
  unfold Uunion
  rw [decodeQPairList_appendListCode, presentedIntervals.append]
  rfl

end Uunion
section
open Domain.Recursive

namespace ComputableBisection

variable {α ? : Type*} {V : NeighborhoodSystem α} {W : NeighborhoodSystem ?}
  (P : ComputablePresentation V) (hDiff : IsComputableDiff P)
  {Q : ComputablePresentation W} (B : ComputableBisection Q) (hWnomin : W.NoMinimal)

namespace splitFromBisection

theorem isSplitSpec' (hpos : V.IsPositive) (hnomin : V.NoMinimal)
    (hdiffClosed : V.DiffClosed) (hQne : ∀ j, Q.X j = ∅) :
    SplitSpec' W (splitFromBisection P hDiff B hWnomin) := by
  intro A B' hAB hBW Xn
```

```
  by_cases h : ∃ n m k, A = P.X n ∧ B' = Q.X m ∧ Xn = P.X k
  · obtain ⟨n, m, k, rfl, rfl, rfl⟩ := h
    rw [splitFromBisection.eq P hDiff B hWnomin hpos hnomin hdiffClosed n m k]
    by_cases h1 : emptyInterDec P (Nat.pair n k) = 1
    · have hInterEmpty : P.X n ∩ P.X k = ∅ := (emptyInterDec.eq_one_iff P hpos hnomin n
     k).mp h1
      have hdiffEq : P.X n \ P.X k = P.X n := by
        ext x
        simp only [Set.mem_sdiff]
        exact ⟨fun hx => hx.1, fun hx =>
          ⟨hx, fun hxk => Set.eq_empty_iff_forall_notMem.mp hInterEmpty x ⟨hx, hxk⟩⟩⟩
      rw [ite_eq_left h1]
      refine ⟨Or.inl rfl, hBW, iff_of_true hInterEmpty rfl, ?_, Set.empty_union _,
        Set.empty_inter _⟩
      rw [hdiffEq]; exact hAB
    · by_cases h2 : IsComputableDiff.emptyDiffDec P hDiff (Nat.pair n k) = 1
      · have hDiffEmpty : P.X n \ P.X k = ∅ :=
          (IsComputableDiff.emptyDiffDec.eq_one_iff P hDiff hdiffClosed hnomin n k).mp
     h2
        have hInterEq : P.X n ∩ P.X k = P.X n := by
          ext x
          simp only [Set.mem_inter_iff]
          refine ⟨fun hx => hx.1, fun hx => ⟨hx, ?_⟩⟩
          by_contra hxk
          exact Set.eq_empty_iff_forall_notMem.mp hDiffEmpty x ⟨hx, hxk⟩
        rw [ite_eq_right h1, ite_eq_left h2]
        refine ⟨hBW, Or.inl rfl, ?_, iff_of_true hDiffEmpty rfl, Set.union_empty _,
          Set.inter_empty _⟩
        rw [hInterEq]; exact hAB
      · have h1' : P.X n ∩ P.X k = ∅ :=
          fun he => h1 ((emptyInterDec.eq_one_iff P hpos hnomin n k).mpr he)
        have h2' : P.X n \ P.X k = ∅ :=
          fun he => h2 ((IsComputableDiff.emptyDiffDec.eq_one_iff P hDiff hdiffClosed
    hnomin n k).mpr he)
        rw [ite_eq_right h1, ite_eq_right h2]
        exact ⟨Or.inr (Q.mem_X _), Or.inr (Q.mem_X _), iff_of_false h1' (hQne _),
          iff_of_false h2' (hQne _), B.union m, B.disjoint m⟩
  · unfold splitFromBisection
    rw [dite_eq_right h]
    exact splitChoice'_isSplitSpec W hWnomin hAB hBW Xn

end splitFromBisection
end ComputableBisection
end

open Domain.Recursive NeighborhoodSystem

theorem hySplit812f : SplitSpec' U splitX812f :=
  ComputableBisection.splitFromBisection.isSplitSpec' VComputablePresentation V.
    isComputableDiff
    UBisection2 U.noMinimal V.isPositive V.noMinimal V.diffClosed
    (fun j => (U_mem_UX j).2.1.ne_empty)

namespace Uunion
open Domain.Recursive NeighborhoodSystem
```

```
theorem spec {n m : ℕ} (_ : ∃ k, UX k = UX n ∪ UX m) : UX (Uunion n m) = UX n ∪ UX m
    := by
  have hUL : U.mem (presentedIntervals (decodeQPairList (Uunion n m))) := by
    rw [Uunion.eq_union]; exact U_union_UX_mem n m
  show presentedIntervals (decodeQPairList (canonCode (Uunion n m))) = _
  rw [presentedIntervals_decodeQPairList_canonCode, canonList_fixed hUL, Uunion.
    eq_union]

end Uunion
open Domain.Recursive NeighborhoodSystem

theorem hxSplit812e : SplitSpec' V splitX812e :=
  ComputableBisection.splitFromBisection.isSplitSpec' UComputablePresentation
    U_isComputableDiff
    B812e V.noMinimal U.isPositive U.noMinimal U.diffClosed (fun j => (VX_nonempty j).
    ne_empty)

theorem U_union_exists (n m : ℕ) : ∃ k, UX k = UX n ∪ UX m := U_surj_UX (
    U_union_UX_mem n m)

theorem U_union_computable : RecDecidable₂ (fun n m => ∃ k, UX k = UX n ∪ UX m) :=
  ⟨fun _ => 1, Nat.Primrec.const 1, fun t => iff_of_true (U_union_exists t.unpair.1 t.
    unpair.2) rfl⟩

def U_isComputableUnion : IsComputableUnion UComputablePresentation where
  unionIdx := Uunion
  unionIdx_primrec := Uunion.primrec
  unionIdx_spec := Uunion.spec
  union_computable := U_union_computable

namespace levelSet
open Domain.Recursive NeighborhoodSystem

theorem myUnion (k1 m1 k2 m2 : ℕ) :
    levelSet k1 m1 ∪ levelSet k2 m2
      = levelSet (max k1 k2) (myLor (_root_.DomainTheory.NeighbourhoodSystems.
    myUpsample k1 (max k1 k2) m1) (_root_.DomainTheory.NeighbourhoodSystems.myUpsample
    k2 (max k1 k2) m2)) := by
  conv_lhs => rw [← levelSet.myUpsample (Nat.le_max_left k1 k2) m1,
    ← levelSet.myUpsample (Nat.le_max_right k1 k2) m2]
  rw [levelSet.union_same_level, myLor_eq_lor]

theorem VunionRaw (n m : ℕ) :
    levelSet (_root_.DomainTheory.NeighbourhoodSystems.VunionRaw n m).unpair.1 (_root_
    .DomainTheory.NeighbourhoodSystems.VunionRaw n m).unpair.2 = VX n ∪ VX m := by
  unfold _root_.DomainTheory.NeighbourhoodSystems.VunionRaw
  rw [unpair_pair_fst, unpair_pair_snd]
  exact (levelSet.myUnion (canonIdx n).unpair.1 (canonIdx n).unpair.2
    (canonIdx m).unpair.1 (canonIdx m).unpair.2).symm

end levelSet
namespace Vunion
open Domain.Recursive NeighborhoodSystem

theorem spec (n m : ℕ) : VX (Vunion n m) = VX n ∪ VX m := by
  have hne : (levelSet (VunionRaw n m).unpair.1 (VunionRaw n m).unpair.2).Nonempty :=
```

```
    by
     rw [levelSet.VunionRaw]; exact (VX_nonempty n).mono Set.subset_union_left
  unfold Vunion
  rw [VX_canonIdx]
  show levelSet (canonIdx (VunionRaw n m)).unpair.1 (canonIdx (VunionRaw n m)).unpair
    .2 = VX n ∪ VX m
  rw [canonIdx.eq_self_of_nonempty hne, levelSet.VunionRaw]

theorem spec' {n m : ℕ} (_ : ∃ k, VX k = VX n ∪ VX m) : VX (Vunion n m) = VX n ∪ VX m
    :=
  Vunion.spec n m

end Vunion
open Domain.Recursive NeighborhoodSystem

theorem V.union_exists (n m : ℕ) : ∃ k, VX k = VX n ∪ VX m := ⟨Vunion n m, Vunion.spec
    n m⟩

theorem V.union_computable : RecDecidable₂ (fun n m => ∃ k, VX k = VX n ∪ VX m) :=
  ⟨fun _ => 1, Nat.Primrec.const 1, fun t => iff_of_true (V.union_exists t.unpair.1 t.
    unpair.2) rfl⟩

namespace levelSet
open Domain.Recursive NeighborhoodSystem

theorem zero_zero : levelSet 0 0 = ∅ := by
  ext n; simp [levelSet, Nat.zero_testBit]

end levelSet
open Domain.Recursive NeighborhoodSystem

theorem VX_zero : VX 0 = V.master := by
  have hc0 : canonIdx 0 = VmasterIdx :=
    canonIdx.eq_master_of_empty (by rw [Nat.unpair_zero]; exact levelSet.zero_zero)
  rw [← VX_canonIdx 0, hc0]
  exact VX_VmasterIdx

set_option linter.unusedVariables false

theorem example_812_e_d : @DomainTheory.NeighbourhoodSystems.SplitSpec' Rat Nat
    DomainTheory.NeighbourhoodSystems.V
  DomainTheory.NeighbourhoodSystems.splitX812e :=
  @DomainTheory.NeighbourhoodSystems.hxSplit812e

theorem example_812_f : @DomainTheory.NeighbourhoodSystems.SplitSpec' Nat Rat
    DomainTheory.NeighbourhoodSystems.U
  DomainTheory.NeighbourhoodSystems.splitX812f :=
  @DomainTheory.NeighbourhoodSystems.hySplit812f

theorem example_812_g1a : @Eq (Set Rat) (DomainTheory.NeighbourhoodSystems.UX (@OfNat.
    ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))))
  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.master Rat DomainTheory.
    NeighbourhoodSystems.U) :=
  DomainTheory.NeighbourhoodSystems.UX_zero

theorem example_812_g1b : @Eq (Set Nat) (DomainTheory.NeighbourhoodSystems.VX (@OfNat.
```

```
    ofNat Nat (nat_lit 0) (instOfNatNat (nat_lit 0))))
  (@DomainTheory.NeighbourhoodSystems.NeighborhoodSystem.master Nat DomainTheory.
    NeighbourhoodSystems.V) :=
  DomainTheory.NeighbourhoodSystems.VX_zero

theorem example_812_g2 : ∀ {n m : Nat},
  (∃ (k : Nat),
      @Eq (Set Nat) (DomainTheory.NeighbourhoodSystems.VX k)
        (@Union.union (Set Nat) (@Set.instUnion Nat) (DomainTheory.
    NeighbourhoodSystems.VX n)
          (DomainTheory.NeighbourhoodSystems.VX m))) →
    @Eq (Set Nat) (DomainTheory.NeighbourhoodSystems.VX (DomainTheory.
    NeighbourhoodSystems.Vunion n m))
      (@Union.union (Set Nat) (@Set.instUnion Nat) (DomainTheory.NeighbourhoodSystems.
    VX n)
        (DomainTheory.NeighbourhoodSystems.VX m)) :=
  @DomainTheory.NeighbourhoodSystems.Vunion.spec'

namespace primrec
open Domain.Recursive NeighborhoodSystem

theorem VunionRaw : Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.
    VunionRaw t.unpair.1 t.unpair.2) := by
  have hcn : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.1) := primrec.canonIdx.comp Nat.Primrec.left
  have hcm : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.2) := primrec.canonIdx.comp Nat.Primrec.right
  have hk1 : Nat.Primrec (fun t : ℕ => (_root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.1).unpair.1) := Nat.Primrec.left.comp hcn
  have hm1 : Nat.Primrec (fun t : ℕ => (_root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.1).unpair.2) := Nat.Primrec.right.comp hcn
  have hk2 : Nat.Primrec (fun t : ℕ => (_root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.2).unpair.1) := Nat.Primrec.left.comp hcm
  have hm2 : Nat.Primrec (fun t : ℕ => (_root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.2).unpair.2) := Nat.Primrec.right.comp hcm
  have hkJ : Nat.Primrec (fun t : ℕ => max (_root_.DomainTheory.NeighbourhoodSystems.
    canonIdx t.unpair.1).unpair.1 (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.
    unpair.2).unpair.1) :=
    primrec_max hk1 hk2
  have hup1 : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    myUpsample (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1
      (max (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1 (
    _root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1)
      (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.2) :=
    (primrec.myUpsample.comp (hk1.pair (hkJ.pair hm1))).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hup2 : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    myUpsample (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1
      (max (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1 (
    _root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1)
      (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.2) :=
    (primrec.myUpsample.comp (hk2.pair (hkJ.pair hm2))).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
  have hlor : Nat.Primrec (fun t : ℕ => myLor
      (_root_.DomainTheory.NeighbourhoodSystems.myUpsample (_root_.DomainTheory.
    NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1
```

```
        (max (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1 (
    _root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1) (_root_.
    DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.2)
      (_root_.DomainTheory.NeighbourhoodSystems.myUpsample (_root_.DomainTheory.
    NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1
        (max (_root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.1).unpair.1 (
    _root_.DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.1) (_root_.
    DomainTheory.NeighbourhoodSystems.canonIdx t.unpair.2).unpair.2)) :=
     (primrec_myLor.comp (hup1.pair hup2)).of_eq fun t => by
       simp only [unpair_pair_fst, unpair_pair_snd]
  exact (hkJ.pair hlor).of_eq fun _ => rfl

theorem Vunion : Nat.Primrec (fun t => _root_.DomainTheory.NeighbourhoodSystems.Vunion
     t.unpair.1 t.unpair.2) :=
  (primrec.canonIdx.comp primrec.VunionRaw).of_eq fun _ => rfl

end primrec
open Domain.Recursive NeighborhoodSystem

def V.isComputableUnion : IsComputableUnion VComputablePresentation where
  unionIdx := Vunion
  unionIdx_primrec := primrec.Vunion
  unionIdx_spec := Vunion.spec'
  union_computable := V.union_computable

end DomainTheory.NeighbourhoodSystems
```

ASharp.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_17

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Proposition_8_10
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_8

public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_24
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_3
public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Table_5_5
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap Example61 Proposition77 Exercise717
    Exercise510

variable {α β : Type*} {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}

variable {hD : ∀ X, D.mem X → X.Nonempty}
```

```
variable {u : ApproximableMap D E} {v : ApproximableMap (prod E E) E}

noncomputable def aSharpInner (a : ApproximableMap U U) :
    ApproximableMap (Dsharp U U_mem_nonempty) (Dsharp U U_mem_nonempty) :=
  gMap ((inSharpMap U_mem_nonempty).comp a) (pairSharpMap U_mem_nonempty)
    U_mem_nonempty

section DsharpFunctor

variable {? ? ? : Type*} {D₀ : NeighborhoodSystem ?} {D₁ : NeighborhoodSystem ?}
  {D₂ : NeighborhoodSystem ?}

variable (hD₀ : ∀ X, D₀.mem X → X.Nonempty) (hD₁ : ∀ X, D₁.mem X → X.Nonempty)
  {hD₂ : ∀ X, D₂.mem X → X.Nonempty}

noncomputable def dsharpMap (f : ApproximableMap D₁ D₀) :
    ApproximableMap (Dsharp D₁ hD₁) (Dsharp D₀ hD₀) :=
  gMap ((inSharpMap hD₀).comp f) (pairSharpMap hD₀) hD₁

theorem dsharpMap_eq (f : ApproximableMap D₁ D₀) :
    dsharpMap hD₀ hD₁ f = gMap ((inSharpMap hD₀).comp f) (pairSharpMap hD₀) hD₁ := rfl

theorem dsharpMap_self_eq_aSharpInner (a : ApproximableMap U U) :
    dsharpMap U_mem_nonempty U_mem_nonempty a = aSharpInner a := rfl

end DsharpFunctor

theorem grel_inSharp_pairSharp_imp_idMap_rel :
    ∀ {W Z}, GRel (inSharpMap hD) (pairSharpMap hD) W Z → MemS D W ∧ MemS D Z ∧ W ⊆ Z
     := by
  intro W Z h
  induction h with
  | gamma hZ => exact ⟨MemS.gamma, hZ ▸ MemS.gamma, hZ ▸ subset_rfl⟩
  | leaf hrel => exact ⟨MemS.zero hrel.1, hrel.2.1, hrel.2.2⟩
  | @node P Q Z₁ Z₂ Z hP hQ hvrel ihP ihQ =>
      obtain ⟨hPmem, hZ1mem, hPZ1⟩ := ihP
      obtain ⟨hQmem, hZ2mem, hQZ2⟩ := ihQ
      obtain ⟨-, hZmem, A, B, hAmem, hBmem, heq, hsub⟩ := hvrel
      obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
      exact ⟨MemS.pair hPmem hQmem, hZmem, (embPair_subset.mpr ⟨hPZ1, hQZ2⟩).trans hsub⟩

noncomputable def iSharp : ApproximableMap (Dsharp U U_mem_nonempty) U :=
  (theorem_8_8_b_strong (dsharpPresentation UComputablePresentation U_mem_nonempty)).
    choose

noncomputable def ISharpComb (a : ApproximableMap U U) :
    ApproximableMap (Dsharp (fixedNbhd a) (fixedNbhd_mem_nonempty a)) U :=
  iSharp.comp (dsharpMap U_mem_nonempty (fixedNbhd_mem_nonempty a) (
    fixedNbhd_subsystem a).inj)

theorem idMap_rel_imp_grel_inSharp_pairSharp :
    ∀ {W}, MemS D W → ∀ {Z}, MemS D Z → W ⊆ Z → GRel (inSharpMap hD) (pairSharpMap
    hD) W Z := by
  intro W hW
  induction hW with
```

```
  | gamma =>
      intro Z hZ hsub
      have hZeq : Z = Gamma D := Set.Subset.antisymm (memS_subset_gamma hZ) hsub
      subst hZeq
      exact GRel.gamma rfl
  | @zero X hX =>
      intro Z hZ hsub
      exact GRel.leaf ⟨hX, hZ, hsub⟩
  | @pair P Q hP hQ ihP ihQ =>
      intro Z hZ hsub
      exact GRel.node (ihP hP subset_rfl) (ihQ hQ subset_rfl)
        ⟨prod_mem_prodNbhd hP hQ, hZ, P, Q, hP, hQ, rfl, hsub⟩

theorem gMap_inSharp_pairSharp_eq_idMap :
    gMap (inSharpMap hD) (pairSharpMap hD) hD = idMap (Dsharp D hD) := by
  apply le_antisymm
  · rw [ApproximableMap.le_iff]
    intro W Z h
    exact grel_inSharp_pairSharp_imp_idMap_rel h
  · rw [ApproximableMap.le_iff]
    intro W Z h
    exact idMap_rel_imp_grel_inSharp_pairSharp h.1 h.2.1 h.2.2

section DsharpFunctor

variable {? ? ? : Type*} {D₀ : NeighborhoodSystem ?} {D₁ : NeighborhoodSystem ?}
  {D₂ : NeighborhoodSystem ?}

variable (hD₀ : ∀ X, D₀.mem X → X.Nonempty) (hD₁ : ∀ X, D₁.mem X → X.Nonempty)
  {hD₂ : ∀ X, D₂.mem X → X.Nonempty}

theorem dsharpMap_id : dsharpMap hD₀ hD₀ (idMap D₀) = idMap (Dsharp D₀ hD₀) := by
  rw [dsharpMap_eq, comp_idMap]
  exact gMap_inSharp_pairSharp_eq_idMap

end DsharpFunctor

theorem inSharp_principal {X : Set α} (hX : D.mem X) :
    inSharp D hD (D.principal hX) = (Dsharp D hD).principal (MemS.zero hX) := by
  rw [← inSharpMap_toElementMap hD]
  apply Element.ext
  intro W
  simp only [mem_principal, ← rel_iff_mem_principal (inSharpMap hD) hX, inSharpMap_rel
    ]
  exact ⟨fun h => h.2, fun h => ⟨hX, h⟩⟩

noncomputable def jSharp : ApproximableMap U (Dsharp U U_mem_nonempty) :=
  (theorem_8_8_b_strong (dsharpPresentation UComputablePresentation U_mem_nonempty)).
    choose_spec.choose

noncomputable def JSharpComb (a : ApproximableMap U U) :
    ApproximableMap U (Dsharp (fixedNbhd a) (fixedNbhd_mem_nonempty a)) :=
  (dsharpMap (fixedNbhd_mem_nonempty a) U_mem_nonempty (fixedNbhd_subsystem a).proj).
    comp jSharp

noncomputable def aSharp (a : ApproximableMap U U) : ApproximableMap U U :=
```

```
  iSharp.comp ((aSharpInner a).comp jSharp)

namespace aSharp

theorem eq (a : ApproximableMap U U) :
    aSharp a = iSharp.comp ((aSharpInner a).comp jSharp) := rfl

end aSharp

theorem jSharp_comp_iSharp : jSharp.comp iSharp = idMap _ :=
  (theorem_8_8_b_strong (dsharpPresentation UComputablePresentation U_mem_nonempty)).
    choose_spec.choose_spec.1

theorem pair_principal_eq_principal_prodNbhd {? ? : Type*} {V₀ : NeighborhoodSystem ?}
    {V₁ : NeighborhoodSystem ?} {P : Set ?} {Q : Set ?} (hP : V₀.mem P) (hQ : V₁.mem Q)
     :
    pair (V₀.principal hP) (V₁.principal hQ)
      = (prod V₀ V₁).principal (prod_mem_prodNbhd hP hQ) := by
  apply Element.ext
  intro W
  simp only [mem_pair, mem_principal, prod_mem_iff]
  constructor
  · rintro ⟨P', Q', ⟨hP', hPP'⟩, ⟨hQ', hQQ'⟩, rfl⟩
    exact ⟨⟨P', Q', hP', hQ', rfl⟩, prodNbhd_subset_iff.mpr ⟨hPP', hQQ'⟩⟩
  · rintro ⟨⟨P', Q', hP', hQ', rfl⟩, hsub⟩
    obtain ⟨hPP', hQQ'⟩ := prodNbhd_subset_iff.mp hsub
    exact ⟨P', Q', ⟨hP', hPP'⟩, ⟨hQ', hQQ'⟩, rfl⟩

theorem pairSharp_principal {P Q : Set (List Bool × α)} (hP : MemS D P) (hQ : MemS D Q
    ) :
    pairSharp D hD ((Dsharp D hD).principal hP) ((Dsharp D hD).principal hQ)
      = (Dsharp D hD).principal (MemS.pair hP hQ) := by
  rw [← pairSharpMap_toElementMap hD, pair_principal_eq_principal_prodNbhd hP hQ]
  apply Element.ext
  intro W
  rw [mem_principal, ← rel_iff_mem_principal (pairSharpMap hD) (prod_mem_prodNbhd hP
    hQ),
    pairSharpMap_rel]
  constructor
  · rintro ⟨-, hW, A, B, hA, hB, heq, hsub⟩
    obtain ⟨rfl, rfl⟩ := prodNbhd_injective heq
    exact ⟨hW, hsub⟩
  · rintro ⟨hW, hsub⟩
    exact ⟨prod_mem_prodNbhd hP hQ, hW, P, Q, hP, hQ, rfl, hsub⟩

theorem gMap_eq_of_satisfies {k : ApproximableMap (Dsharp D hD) E} (hk : IsStrict k)
    (hu : ∀ x : D.Element, k.toElementMap (inSharp D hD x) = u.toElementMap x)
    (hv : ∀ y z : (Dsharp D hD).Element,
      k.toElementMap (pairSharp D hD y z)
        = v.toElementMap (pair (k.toElementMap y) (k.toElementMap z))) :
    k = gMap u v hD := by
  have main : ∀ {W}, MemS D W → ∀ Z, k.rel W Z ↔ GRel u v W Z := by
    intro W hW
    induction hW with
    | gamma =>
        intro Z
```

```
        constructor
        · intro h; exact GRel.gamma (hk h)
        · intro h
          have hZ : Z = E.master := gRel_gamma_inv hD h
          subst hZ
          exact k.master_rel
    | @zero X hX =>
        intro Z
        have key := hu (D.principal hX)
        rw [inSharp_principal hX] at key
        constructor
        · intro h
          have h1 := (rel_iff_mem_principal k (MemS.zero hX)).mp h
          rw [key] at h1
          exact GRel.leaf ((rel_iff_mem_principal u hX).mpr h1)
        · intro h
          have h1 := (rel_iff_mem_principal u hX).mp (gRel_embZero_inv hD h)
          rw [← key] at h1
          exact (rel_iff_mem_principal k (MemS.zero hX)).mpr h1
    | @pair P Q hP hQ ihP ihQ =>
        intro Z
        have key := hv ((Dsharp D hD).principal hP) ((Dsharp D hD).principal hQ)
        rw [pairSharp_principal hP hQ] at key
        constructor
        · intro h
          have h1 := (rel_iff_mem_principal k (MemS.pair hP hQ)).mp h
          rw [key] at h1
          obtain ⟨V, hVmem, hVrel⟩ := h1
          obtain ⟨Z1, Z2, hZ1, hZ2, rfl⟩ := hVmem
          have hkZ1 : k.rel P Z1 := (rel_iff_mem_principal k hP).mpr hZ1
          have hkZ2 : k.rel Q Z2 := (rel_iff_mem_principal k hQ).mpr hZ2
          exact GRel.node ((ihP Z1).mp hkZ1) ((ihQ Z2).mp hkZ2) hVrel
        · intro h
          obtain ⟨Z1, Z2, hg1, hg2, hvrel⟩ := gRel_embPair_inv hD h
          have h1 := (rel_iff_mem_principal k hP).mp ((ihP Z1).mpr hg1)
          have h2 := (rel_iff_mem_principal k hQ).mp ((ihQ Z2).mpr hg2)
          have h3 : (v.toElementMap (pair (k.toElementMap ((Dsharp D hD).principal hP)
    )
              (k.toElementMap ((Dsharp D hD).principal hQ)))).mem Z :=
            ⟨prodNbhd Z1 Z2, ⟨Z1, Z2, h1, h2, rfl⟩, hvrel⟩
          rw [← key] at h3
          exact (rel_iff_mem_principal k (MemS.pair hP hQ)).mpr h3
  apply ApproximableMap.ext
  intro W Z
  by_cases hW : MemS D W
  · exact main hW Z
  · exact ⟨fun h => absurd (k.rel_dom h) hW, fun h => absurd (gRel_dom h) hW⟩

section DsharpFunctor

variable {? ? ? : Type*} {D₀ : NeighborhoodSystem ?} {D₁ : NeighborhoodSystem ?}
  {D₂ : NeighborhoodSystem ?}

variable (hD₀ : ∀ X, D₀.mem X → X.Nonempty) (hD₁ : ∀ X, D₁.mem X → X.Nonempty)
  {hD₂ : ∀ X, D₂.mem X → X.Nonempty}
```

```
theorem dsharpMap_comp (f : ApproximableMap D₂ D₁) (f' : ApproximableMap D₁ D₀) :
    dsharpMap hD₀ hD₂ (f'.comp f) = (dsharpMap hD₀ hD₁ f').comp (dsharpMap hD₁ hD₂ f) :=
     by
  set g1 : ApproximableMap (Dsharp D₂ hD₂) (Dsharp D₁ hD₁) := dsharpMap hD₁ hD₂ f with
    hg1_def
  set g2 : ApproximableMap (Dsharp D₁ hD₁) (Dsharp D₀ hD₀) := dsharpMap hD₀ hD₁ f' with
    hg2_def
  symm
  show g2.comp g1 = dsharpMap hD₀ hD₂ (f'.comp f)
  rw [dsharpMap_eq]
  apply gMap_eq_of_satisfies
  · exact isStrict_comp (by rw [hg2_def, dsharpMap_eq]; exact gMap_strict hD₁)
      (by rw [hg1_def, dsharpMap_eq]; exact gMap_strict hD₂)
  · intro x
    have e1 : g1.toElementMap (inSharp D₂ hD₂ x) = inSharp D₁ hD₁ (f.toElementMap x) :=
     by
      rw [hg1_def, dsharpMap_eq, gMap_in hD₂ x, toElementMap_comp,
    inSharpMap_toElementMap]
    have e2 : g2.toElementMap (inSharp D₁ hD₁ (f.toElementMap x))
        = inSharp D₀ hD₀ (f'.toElementMap (f.toElementMap x)) := by
      rw [hg2_def, dsharpMap_eq, gMap_in hD₁ (f.toElementMap x), toElementMap_comp,
        inSharpMap_toElementMap]
    calc (g2.comp g1).toElementMap (inSharp D₂ hD₂ x)
        = g2.toElementMap (g1.toElementMap (inSharp D₂ hD₂ x)) := toElementMap_comp _ _
     _
      _ = g2.toElementMap (inSharp D₁ hD₁ (f.toElementMap x)) := by rw [e1]
      _ = inSharp D₀ hD₀ (f'.toElementMap (f.toElementMap x)) := e2
      _ = ((inSharpMap hD₀).comp (f'.comp f)).toElementMap x := by
          rw [toElementMap_comp, toElementMap_comp, inSharpMap_toElementMap]
  · intro y z
    have e1 : g1.toElementMap (pairSharp D₂ hD₂ y z)
        = pairSharp D₁ hD₁ (g1.toElementMap y) (g1.toElementMap z) := by
      rw [hg1_def, dsharpMap_eq, gMap_pair hD₂ y z, pairSharpMap_toElementMap]
    have e2 : g2.toElementMap (pairSharp D₁ hD₁ (g1.toElementMap y) (g1.toElementMap z)
    )
        = pairSharp D₀ hD₀ (g2.toElementMap (g1.toElementMap y))
          (g2.toElementMap (g1.toElementMap z)) := by
      rw [hg2_def, dsharpMap_eq, gMap_pair hD₁ (g1.toElementMap y) (g1.toElementMap z),
        pairSharpMap_toElementMap]
    calc (g2.comp g1).toElementMap (pairSharp D₂ hD₂ y z)
        = g2.toElementMap (g1.toElementMap (pairSharp D₂ hD₂ y z)) := toElementMap_comp
     _ _ _
      _ = g2.toElementMap (pairSharp D₁ hD₁ (g1.toElementMap y) (g1.toElementMap z)) :=
     by
          rw [e1]
      _ = pairSharp D₀ hD₀ (g2.toElementMap (g1.toElementMap y))
          (g2.toElementMap (g1.toElementMap z)) := e2
      _ = (pairSharpMap hD₀).toElementMap
          (pair (g2.toElementMap (g1.toElementMap y)) (g2.toElementMap (g1.
    toElementMap z))) :=
        (pairSharpMap_toElementMap hD₀ _ _).symm
      _ = (pairSharpMap hD₀).toElementMap
          (pair ((g2.comp g1).toElementMap y) ((g2.comp g1).toElementMap z)) := by
        rw [toElementMap_comp, toElementMap_comp]

end DsharpFunctor
```

```
theorem ISharpComb_comp_JSharpComb {a : ApproximableMap U U} (ha : FinitaryProjection
    a) :
    (ISharpComb a).comp (JSharpComb a) = aSharp a := by
  unfold ISharpComb JSharpComb
  rw [comp_assoc, ← comp_assoc (dsharpMap _ _ _) (dsharpMap _ _ _) jSharp, ←
    dsharpMap_comp,
    inj_comp_proj_eq_self ha, dsharpMap_self_eq_aSharpInner]
  exact (aSharp.eq a).symm

theorem JSharpComb_comp_ISharpComb (a : ApproximableMap U U) :
    (JSharpComb a).comp (ISharpComb a) =
      idMap (Dsharp (fixedNbhd a) (fixedNbhd_mem_nonempty a)) := by
  unfold JSharpComb ISharpComb
  rw [comp_assoc, ← comp_assoc jSharp iSharp (dsharpMap _ _ _), jSharp_comp_iSharp,
    idMap_comp,
    ← dsharpMap_comp, (fixedNbhd_subsystem a).proj_comp_inj, dsharpMap_id]

noncomputable def dsharp_fixedNbhd_elementIso {a : ApproximableMap U U}
    (ha : FinitaryProjection a) :
    (Dsharp (fixedNbhd a) (fixedNbhd_mem_nonempty a)).Element ≃o
      {y : U.Element // (aSharp a).toElementMap y = y} :=
  elementIsoOfProjectionPair (ISharpComb a) (JSharpComb a) (JSharpComb_comp_ISharpComb
    a)
    (ISharpComb_comp_JSharpComb ha).symm

theorem gMap_selfComp_eq_of_isRetraction {a : ApproximableMap D D} (ha : Retraction a)
    :
    (gMap ((inSharpMap hD).comp a) (pairSharpMap hD) hD).comp
        (gMap ((inSharpMap hD).comp a) (pairSharpMap hD) hD)
      = gMap ((inSharpMap hD).comp a) (pairSharpMap hD) hD := by
  set u : ApproximableMap D (Dsharp D hD) := (inSharpMap hD).comp a with hu_def
  set v : ApproximableMap (prod (Dsharp D hD) (Dsharp D hD)) (Dsharp D hD) :=
    pairSharpMap hD with hv_def
  set g : ApproximableMap (Dsharp D hD) (Dsharp D hD) := gMap u v hD with hg_def
  have hu_eq : ∀ y : D.Element, u.toElementMap y = inSharp D hD (a.toElementMap y) :=
    by
    intro y; rw [hu_def, toElementMap_comp, inSharpMap_toElementMap]
  show g.comp g = g
  apply gMap_eq_of_satisfies
  · rw [hg_def]; exact isStrict_comp (gMap_strict hD) (gMap_strict hD)
  · intro x
    have e1 : g.toElementMap (inSharp D hD x) = u.toElementMap x := by
      rw [hg_def]; exact gMap_in hD x
    have e2 : g.toElementMap (u.toElementMap x) = u.toElementMap (a.toElementMap x) :=
     by
      rw [hu_eq x, hg_def]; exact gMap_in hD (a.toElementMap x)
    calc (g.comp g).toElementMap (inSharp D hD x)
        = g.toElementMap (g.toElementMap (inSharp D hD x)) := toElementMap_comp _ _ _
      _ = g.toElementMap (u.toElementMap x) := by rw [e1]
      _ = u.toElementMap (a.toElementMap x) := e2
      _ = inSharp D hD (a.toElementMap (a.toElementMap x)) := hu_eq _
      _ = inSharp D hD (a.toElementMap x) := by rw [toElementMap_idem_of_isRetraction
    ha]
      _ = u.toElementMap x := (hu_eq x).symm
  · intro y z
```

```
    have e1 : g.toElementMap (pairSharp D hD y z)
        = v.toElementMap (pair (g.toElementMap y) (g.toElementMap z)) := by
      rw [hg_def]; exact gMap_pair hD y z
    have e2 : v.toElementMap (pair (g.toElementMap y) (g.toElementMap z))
        = pairSharp D hD (g.toElementMap y) (g.toElementMap z) := by
      rw [hv_def]; exact pairSharpMap_toElementMap hD _ _
    have e3 : g.toElementMap (pairSharp D hD (g.toElementMap y) (g.toElementMap z))
        = v.toElementMap
            (pair (g.toElementMap (g.toElementMap y)) (g.toElementMap (g.toElementMap
    z))) := by
      rw [hg_def]; exact gMap_pair hD _ _
    calc (g.comp g).toElementMap (pairSharp D hD y z)
        = g.toElementMap (g.toElementMap (pairSharp D hD y z)) := toElementMap_comp _
    _ _
      _ = g.toElementMap (v.toElementMap (pair (g.toElementMap y) (g.toElementMap z)))
     := by
          rw [e1]
      _ = g.toElementMap (pairSharp D hD (g.toElementMap y) (g.toElementMap z)) := by
    rw [e2]
      _ = v.toElementMap
            (pair (g.toElementMap (g.toElementMap y)) (g.toElementMap (g.toElementMap
    z))) := e3
      _ = v.toElementMap (pair ((g.comp g).toElementMap y) ((g.comp g).toElementMap z)
    ) := by
          rw [toElementMap_comp, toElementMap_comp]

theorem GRel.mono_uv (_hD : ∀ X, D.mem X → X.Nonempty)
    {u u' : ApproximableMap D E} {v v' : ApproximableMap (prod E E) E}
    (hu : u ≤ u') (hv : v ≤ v') :
    ∀ {W Z}, GRel u v W Z → GRel u' v' W Z := by
  intro W Z h
  induction h with
  | gamma hZ => exact GRel.gamma hZ
  | leaf hrel => exact GRel.leaf (hu _ _ hrel)
  | node hP hQ hvrel ihP ihQ => exact GRel.node ihP ihQ (hv _ _ hvrel)

theorem aSharpInner_eq (a : ApproximableMap U U) :
    aSharpInner a = gMap ((inSharpMap U_mem_nonempty).comp a) (pairSharpMap
    U_mem_nonempty)
      U_mem_nonempty := rfl

theorem aSharpInner_idem_of_isRetraction {a : ApproximableMap U U} (ha : Retraction a)
     :
    Retraction (aSharpInner a) := by
  constructor
  show (aSharpInner a).comp (aSharpInner a) = aSharpInner a
  rw [aSharpInner_eq]
  exact gMap_selfComp_eq_of_isRetraction ha

theorem gMap_mono (hD : ∀ X, D.mem X → X.Nonempty)
    {u u' : ApproximableMap D E} {v v' : ApproximableMap (prod E E) E}
    (hu : u ≤ u') (hv : v ≤ v') : gMap u v hD ≤ gMap u' v' hD := by
  rw [ApproximableMap.le_iff]
  intro W Z h
  exact GRel.mono_uv hD hu hv h
```

```
theorem iSharp_comp_jSharp_le : iSharp.comp jSharp ≤ idMap U :=
  (theorem_8_8_b_strong (dsharpPresentation UComputablePresentation U_mem_nonempty)).
    choose_spec.choose_spec.2.1

theorem dsharpU_trianglelefteq_U : Dsharp U U_mem_nonempty ? U :=
  trianglelefteq_of_projectionPair iSharp jSharp jSharp_comp_iSharp
    iSharp_comp_jSharp_le

theorem iSharp_isComputableMap :
    ComputableMap (dsharpPresentation UComputablePresentation U_mem_nonempty)
      UComputablePresentation iSharp :=
  (theorem_8_8_b_strong (dsharpPresentation UComputablePresentation U_mem_nonempty)).
    choose_spec.choose_spec.2.2.1

theorem jSharp_isComputableMap :
    ComputableMap UComputablePresentation
      (dsharpPresentation UComputablePresentation U_mem_nonempty) jSharp :=
  (theorem_8_8_b_strong (dsharpPresentation UComputablePresentation U_mem_nonempty)).
    choose_spec.choose_spec.2.2.2

end DomainTheory.NeighbourhoodSystems
```

ASharp_more.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.ASharp

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap Example61 Proposition77 Exercise717
    Exercise510

variable {α β : Type*} {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}
variable {hD : ∀ X, D.mem X → X.Nonempty}
variable {u : ApproximableMap D E} {v : ApproximableMap (prod E E) E}

namespace aSharp

theorem le_idMap_of_le {a : ApproximableMap U U} (ha : a ≤ idMap U) :
    aSharp a ≤ idMap U := by
  have h1 : (inSharpMap U_mem_nonempty).comp a ≤ inSharpMap U_mem_nonempty := by
    calc (inSharpMap U_mem_nonempty).comp a
        ≤ (inSharpMap U_mem_nonempty).comp (idMap U) := comp_mono_gen le_rfl ha
      _ = inSharpMap U_mem_nonempty := comp_idMap _
  have h2 : aSharpInner a ≤ idMap (Dsharp U U_mem_nonempty) := by
    calc aSharpInner a
        ≤ gMap (inSharpMap U_mem_nonempty) (pairSharpMap U_mem_nonempty)
    U_mem_nonempty :=
          gMap_mono U_mem_nonempty h1 le_rfl
      _ = idMap (Dsharp U U_mem_nonempty) := gMap_inSharp_pairSharp_eq_idMap
  calc aSharp a = iSharp.comp ((aSharpInner a).comp jSharp) := eq a
    _ ≤ iSharp.comp ((idMap (Dsharp U U_mem_nonempty)).comp jSharp) :=
```

```
        comp_mono_gen le_rfl (comp_mono_gen h2 le_rfl)
    _ = iSharp.comp jSharp := by rw [idMap_comp]
    _ ≤ idMap U := iSharp_comp_jSharp_le

theorem isFinitary {a : ApproximableMap U U} (ha : FinitaryProjection a) :
    IsFinitary (aSharp a) :=
  isFinitary_of_projectionPair (ISharpComb a) (JSharpComb a) (
    JSharpComb_comp_ISharpComb a)
    (ISharpComb_comp_JSharpComb ha).symm

theorem isComputable {a : ApproximableMap U U}
    (ha : ComputableMap UComputablePresentation UComputablePresentation a) :
    ComputableMap UComputablePresentation UComputablePresentation (aSharp a) := by
  have hu : ComputableMap UComputablePresentation
      (dsharpPresentation UComputablePresentation U_mem_nonempty)
      ((inSharpMap U_mem_nonempty).comp a) :=
    comp_isComputable ha (inSharp_isComputable U_mem_nonempty UComputablePresentation)
  have hInner : ComputableMap (dsharpPresentation UComputablePresentation
    U_mem_nonempty)
      (dsharpPresentation UComputablePresentation U_mem_nonempty) (aSharpInner a) :=
    gMap_isComputable U_mem_nonempty UComputablePresentation
      (dsharpPresentation UComputablePresentation U_mem_nonempty) hu
      (pairSharp_isComputable U_mem_nonempty UComputablePresentation)
  exact comp_isComputable (comp_isComputable jSharp_isComputableMap hInner)
    iSharp_isComputableMap

end aSharp

theorem toElementMap_aSharp (a : ApproximableMap U U) (x : U.Element) :
    (aSharp a).toElementMap x
      = iSharp.toElementMap ((aSharpInner a).toElementMap (jSharp.toElementMap x)) :=
    by
  rw [aSharp.eq]
  simp only [toElementMap_comp]

theorem isRetraction_aSharp {a : ApproximableMap U U} (ha2 : Retraction (aSharpInner a
    )) :
    Retraction (aSharp a) := by
  constructor
  apply ext_of_toElementMap
  intro x
  rw [toElementMap_comp, toElementMap_aSharp a ((aSharp a).toElementMap x),
    toElementMap_aSharp a x, toElementMap_of_comp_eq_idMap jSharp_comp_iSharp,
    toElementMap_idem_of_isRetraction ha2]

theorem isProjection_aSharp {a : ApproximableMap U U} (ha : IsProjection a) :
    IsProjection (aSharp a) :=
  ⟨isRetraction_aSharp (aSharpInner_idem_of_isRetraction ha.1), aSharp.le_idMap_of_le
    ha.2⟩

theorem isFinitaryProjection_aSharp {a : ApproximableMap U U} (ha : FinitaryProjection
    a) :
    FinitaryProjection (aSharp a) :=
  ⟨⟨isProjection_aSharp ha.out.1, aSharp.isFinitary ha⟩⟩

variable {? α' β' : Type*}
```

```
variable {V₀ : NeighborhoodSystem α} {V₁ : NeighborhoodSystem β}
variable {V₀' : NeighborhoodSystem α'} {V₁' : NeighborhoodSystem β'}
variable {V : NeighborhoodSystem β}

theorem ofIso_comp_ofIso_symm (e : V₀.Element ≃o V₀'.Element) :
    (ofIso e).comp (ofIso e.symm) = idMap V₀' := by
  apply ext_of_toElementMap
  intro x
  rw [toElementMap_comp, toElementMap_ofIso, toElementMap_ofIso, toElementMap_idMap,
    OrderIso.apply_symm_apply]

theorem funSpaceCongr_hij (e0 : V₀.Element ≃o V₀'.Element) (e1 : V₁.Element ≃o V₁'.
    Element) :
    (expMap (ofIso e0.symm) (ofIso e1)).comp (expMap (ofIso e0) (ofIso e1.symm)) =
      idMap (funSpace V₀' V₁') := by
  rw [← expMap.comp, ofIso_comp_ofIso_symm, ofIso_comp_ofIso_symm, expMap.id]

theorem ofIso_symm_comp_ofIso (e : V₀.Element ≃o V₀'.Element) :
    (ofIso e.symm).comp (ofIso e) = idMap V₀ := by
  apply ext_of_toElementMap
  intro x
  rw [toElementMap_comp, toElementMap_ofIso, toElementMap_ofIso, toElementMap_idMap,
    OrderIso.symm_apply_apply]

theorem funSpaceCongr_hji (e0 : V₀.Element ≃o V₀'.Element) (e1 : V₁.Element ≃o V₁'.
    Element) :
    (expMap (ofIso e0) (ofIso e1.symm)).comp (expMap (ofIso e0.symm) (ofIso e1)) =
      idMap (funSpace V₀ V₁) := by
  rw [← expMap.comp, ofIso_symm_comp_ofIso, ofIso_symm_comp_ofIso, expMap.id]

def orderIsoOfMutualInverse {D : NeighborhoodSystem α} {E : NeighborhoodSystem β}
    (i : ApproximableMap D E) (j : ApproximableMap E D)
    (hji : j.comp i = idMap D) (hij : i.comp j = idMap E) : D.Element ≃o E.Element
    where
  toFun := i.toElementMap
  invFun := j.toElementMap
  left_inv x := by rw [← toElementMap_comp, hji, toElementMap_idMap]
  right_inv y := by rw [← toElementMap_comp, hij, toElementMap_idMap]
  map_rel_iff' := by
    intro x x'
    show i.toElementMap x ≤ i.toElementMap x' ↔ x ≤ x'
    constructor
    · intro h
      have hm := j.toElementMap_mono h
      rwa [← toElementMap_comp, ← toElementMap_comp, hji, toElementMap_idMap,
        toElementMap_idMap] at hm
    · intro h
      exact i.toElementMap_mono h

noncomputable def funSpaceCongrOrderIso (e0 : V₀.Element ≃o V₀'.Element)
    (e1 : V₁.Element ≃o V₁'.Element) :
    (funSpace V₀ V₁).Element ≃o (funSpace V₀' V₁').Element :=
  orderIsoOfMutualInverse (expMap (ofIso e0.symm) (ofIso e1)) (expMap (ofIso e0) (
    ofIso e1.symm))
    (funSpaceCongr_hji e0 e1) (funSpaceCongr_hij e0 e1)
```

```
theorem curry_isomorphic (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    (V₂ : NeighborhoodSystem ?) :
    funSpace (prod V₀ V₁) V₂ ≅? funSpace V₀ (funSpace V₁ V₂) :=
  ⟨curryIso V₀ V₁ V₂⟩

theorem funSpace_congr (h0 : V₀ ≅? V₀') (h1 : V₁ ≅? V₁') :
    funSpace V₀ V₁ ≅? funSpace V₀' V₁' :=
  h0.elim fun e0 => h1.elim fun e1 => ⟨funSpaceCongrOrderIso e0 e1⟩

theorem funSpace_congr_left (h0 : V₀ ≅? V₀') : funSpace V₀ V₁ ≅? funSpace V₀' V₁ :=
  funSpace_congr h0 (Isomorphic.refl V₁)

theorem funSpace_congr_right (h1 : V₁ ≅? V₁') : funSpace V₀ V₁ ≅? funSpace V₀ V₁' :=
  funSpace_congr (Isomorphic.refl V₀) h1

theorem prod_self_isomorphic (hDV : D ≅? funSpace D V) (hVV : prod V V ≅? V) :
    prod D D ≅? D :=
  ((hDV.prod hDV).trans (funProd_isomorphic).symm).trans
    ((funSpace_congr_right hVV).trans hDV.symm)

theorem funSpace_self_isomorphic (hDV : D ≅? funSpace D V) (hVV : prod V V ≅? V) :
    D ≅? funSpace D D :=
  have hDD : prod D D ≅? D := prod_self_isomorphic hDV hVV
  have step : funSpace D D ≅? D :=
    ((funSpace_congr_right hDV).trans (curry_isomorphic D D V).symm).trans
      ((funSpace_congr_left hDD).trans hDV.symm)
  step.symm

end DomainTheory.NeighbourhoodSystems
```

atomCode.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.UX
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.splitU
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.DAtom
public import Mathlib.Data.Nat.Bitwise

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive

def packState (remK posC negC uCode : ℕ) : ℕ := Nat.pair remK (Nat.pair posC (Nat.pair
    negC uCode))

def stateCode (s : ℕ) : ℕ := s.unpair.2.unpair.2.unpair.2

def stateNeg (s : ℕ) : ℕ := s.unpair.2.unpair.2.unpair.1

def statePos (s : ℕ) : ℕ := s.unpair.2.unpair.1

def stateRem (s : ℕ) : ℕ := s.unpair.1
```

```
@[simp] theorem stateRem_packState (a b c d : ℕ) : stateRem (packState a b c d) = a :=
     by
  unfold stateRem packState; simp only [unpair_pair_fst]

@[simp] theorem statePos_packState (a b c d : ℕ) : statePos (packState a b c d) = b :=
     by
  unfold statePos packState; simp only [unpair_pair_fst, unpair_pair_snd]

@[simp] theorem stateNeg_packState (a b c d : ℕ) : stateNeg (packState a b c d) = c :=
     by
  unfold stateNeg packState; simp only [unpair_pair_fst, unpair_pair_snd]

@[simp] theorem stateCode_packState (a b c d : ℕ) : stateCode (packState a b c d) = d
    := by
  unfold stateCode packState; simp only [unpair_pair_snd]

def atomBase (k : ℕ) : ℕ := packState k 0 0 UmasterIdx

def deltaOf (k : ℕ) : ℕ → Bool := fun i => decide ((k / 2 ^ i) % 2 = 1)

def unionUX (n m : ℕ) : ℕ := Domain.Recursive.appendCode (canonCode n) (canonCode m)

def wState (w : ℕ) : ℕ := w.unpair.2.unpair.2

def wY (w : ℕ) : ℕ := w.unpair.2.unpair.1

def atomStep (datomDec : ℕ → ℕ) (w : ℕ) : ℕ :=
  let y := wY w
  let s := wState w
  let bit := stateRem s % 2
  let posC' := Nat.pair y (statePos s) + 1
  let negC' := Nat.pair y (stateNeg s) + 1
  let emptyI := datomDec (Nat.pair posC' (stateNeg s))
  let emptyJ := datomDec (Nat.pair (statePos s) negC')
  packState (stateRem s / 2) (selectFn bit posC' (statePos s)) (selectFn bit (stateNeg
     s) negC')
    (selectFn bit
      (selectFn emptyI 0 (selectFn emptyJ (stateCode s) (splitULeft (stateCode s))))
      (selectFn emptyJ 0 (selectFn emptyI (stateCode s) (splitURight (stateCode s)))))

theorem deltaOf_eq_testBit (k i : ℕ) : deltaOf k i = k.testBit i :=
  Nat.testBit_eq_decide_div_mod_eq.symm

theorem deltaOf_add_two_pow_of_lt {n : ℕ} (m : ℕ) {i : ℕ} (hi : i < n) :
    deltaOf (m + 2 ^ n) i = deltaOf m i := by
  rw [deltaOf_eq_testBit, deltaOf_eq_testBit, Nat.add_comm, Nat.testBit_two_pow_add_gt
     hi]

theorem deltaOf_two_pow_add_self {n m : ℕ} (hm : m < 2 ^ n) : deltaOf (m + 2 ^ n) n =
    true := by
  rw [deltaOf_eq_testBit, Nat.add_comm, Nat.testBit_two_pow_add_eq, Nat.
    testBit_lt_two_pow hm]
  rfl

def encodeBits (? : ℕ → Bool) : ℕ → ℕ
  | 0 => 0
```

```
  | (n + 1) => encodeBits ? n + (if ? n then 2 ^ n else 0)

theorem encodeBits_lt (? : ℕ → Bool) : ∀ n, encodeBits ? n < 2 ^ n
  | 0 => by simp [encodeBits]
  | (n + 1) => by
      have ih := encodeBits_lt ? n
      show encodeBits ? n + (if ? n then 2 ^ n else 0) < 2 ^ (n + 1)
      rw [pow_succ]
      rcases Bool.eq_false_or_eq_true (? n) with h | h <;> simp [h] <;> omega

theorem deltaOf_encodeBits (? : ℕ → Bool) : ∀ n i, i < n → deltaOf (encodeBits ? n) i
     = ? i := by
  intro n
  induction n with
  | zero => intro i hi; exact absurd hi (Nat.not_lt_zero i)
  | succ n ih =>
    intro i hi
    show deltaOf (encodeBits ? n + (if ? n then 2 ^ n else 0)) i = ? i
    rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | hi'
    · rcases Bool.eq_false_or_eq_true (? n) with h | h
      · rw [h, ite_eq_left rfl, deltaOf_add_two_pow_of_lt _ hi']
        exact ih i hi'
      · rw [h, ite_eq_right (by simp), Nat.add_zero]
        exact ih i hi'
    · rw [hi']
      rcases Bool.eq_false_or_eq_true (? n) with h | h
      · rw [h, ite_eq_left rfl]
        exact deltaOf_two_pow_add_self (encodeBits_lt ? n)
      · rw [h, ite_eq_right (by simp), Nat.add_zero, deltaOf_eq_testBit,
          Nat.testBit_lt_two_pow (encodeBits_lt ? n)]

namespace AtomCode

theorem primrec_atomBase : Nat.Primrec atomBase :=
  ((Nat.Primrec.id).pair ((Nat.Primrec.const 0).pair
    ((Nat.Primrec.const 0).pair (Nat.Primrec.const UmasterIdx)))).of_eq fun k => by
    unfold atomBase packState; simp only [id_eq]

theorem primrec_stateCode : Nat.Primrec stateCode :=
  Nat.Primrec.right.comp (Nat.Primrec.right.comp Nat.Primrec.right)

theorem primrec_stateNeg : Nat.Primrec stateNeg :=
  Nat.Primrec.left.comp (Nat.Primrec.right.comp Nat.Primrec.right)

theorem primrec_statePos : Nat.Primrec statePos := Nat.Primrec.left.comp Nat.Primrec.
    right

theorem primrec_stateRem : Nat.Primrec stateRem := Nat.Primrec.left

theorem primrec_unionUX : Nat.Primrec (fun t : ℕ => unionUX t.unpair.1 t.unpair.2) :=
    by
  unfold unionUX
  exact (Domain.Recursive.primrec_appendCode.comp ((primrec_canonCode.comp Nat.Primrec
    .left).pair
    (primrec_canonCode.comp Nat.Primrec.right))).of_eq
    fun t => by simp only [unpair_pair_fst, unpair_pair_snd]
```

```
theorem primrec_wState : Nat.Primrec wState := Nat.Primrec.right.comp Nat.Primrec.
    right

theorem primrec_wY : Nat.Primrec wY := Nat.Primrec.left.comp Nat.Primrec.right

theorem primrec_atomStep {datomDec : ℕ → ℕ} (hd : Nat.Primrec datomDec) :
    Nat.Primrec (atomStep datomDec) := by
  have hy : Nat.Primrec wY := primrec_wY
  have hs : Nat.Primrec wState := primrec_wState
  have hrem : Nat.Primrec (fun w => stateRem (wState w)) := primrec_stateRem.comp hs
  have hpos : Nat.Primrec (fun w => statePos (wState w)) := primrec_statePos.comp hs
  have hneg : Nat.Primrec (fun w => stateNeg (wState w)) := primrec_stateNeg.comp hs
  have hcode : Nat.Primrec (fun w => stateCode (wState w)) := primrec_stateCode.comp
    hs
  have hbit : Nat.Primrec (fun w => stateRem (wState w) % 2) := primrec_mod2.comp hrem
  have hposC' : Nat.Primrec (fun w => Nat.pair (wY w) (statePos (wState w)) + 1) :=
    Nat.Primrec.succ.comp (hy.pair hpos)
  have hnegC' : Nat.Primrec (fun w => Nat.pair (wY w) (stateNeg (wState w)) + 1) :=
    Nat.Primrec.succ.comp (hy.pair hneg)
  have hemptyI : Nat.Primrec (fun w => datomDec (Nat.pair
      (Nat.pair (wY w) (statePos (wState w)) + 1) (stateNeg (wState w)))) :=
    hd.comp (hposC'.pair hneg)
  have hemptyJ : Nat.Primrec (fun w => datomDec (Nat.pair (statePos (wState w))
      (Nat.pair (wY w) (stateNeg (wState w)) + 1))) :=
    hd.comp (hpos.pair hnegC')
  have hsplitL : Nat.Primrec (fun w => splitULeft (stateCode (wState w))) :=
    primrec_splitULeft.comp hcode
  have hsplitR : Nat.Primrec (fun w => splitURight (stateCode (wState w))) :=
    primrec_splitURight.comp hcode
  have hcodeBranch : Nat.Primrec (fun w => selectFn (stateRem (wState w) % 2)
      (selectFn (datomDec (Nat.pair (Nat.pair (wY w) (statePos (wState w)) + 1) (
    stateNeg (wState w))))
        0 (selectFn (datomDec (Nat.pair (statePos (wState w))
          (Nat.pair (wY w) (stateNeg (wState w)) + 1))) (stateCode (wState w)) (
    splitULeft (stateCode (wState w)))))
      (selectFn (datomDec (Nat.pair (statePos (wState w))
          (Nat.pair (wY w) (stateNeg (wState w)) + 1))) 0
        (selectFn (datomDec (Nat.pair (Nat.pair (wY w) (statePos (wState w)) + 1) (
    stateNeg (wState w))))
          (stateCode (wState w)) (splitURight (stateCode (wState w)))))) :=
    primrec_selectFn hbit
      (primrec_selectFn hemptyI (Nat.Primrec.const 0) (primrec_selectFn hemptyJ hcode
    hsplitL))
      (primrec_selectFn hemptyJ (Nat.Primrec.const 0) (primrec_selectFn hemptyI hcode
    hsplitR))
  have hrem' : Nat.Primrec (fun w => stateRem (wState w) / 2) := primrec_div2.comp
    hrem
  have hposBranch : Nat.Primrec (fun w => selectFn (stateRem (wState w) % 2)
      (Nat.pair (wY w) (statePos (wState w)) + 1) (statePos (wState w))) :=
    primrec_selectFn hbit hposC' hpos
  have hnegBranch : Nat.Primrec (fun w => selectFn (stateRem (wState w) % 2)
      (stateNeg (wState w)) (Nat.pair (wY w) (stateNeg (wState w)) + 1)) :=
    primrec_selectFn hbit hneg hnegC'
  exact (hrem'.pair (hposBranch.pair (hnegBranch.pair hcodeBranch))).of_eq fun w => by
    unfold atomStep packState
```

```
    simp only []

end AtomCode

end DomainTheory.NeighbourhoodSystems
```

atomUCode.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.splitU
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.UX
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.DAtom

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive

variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)

def eIdx (n : ℕ) : ℕ :=
  if n = 0 then P.masterIdx else if n = P.masterIdx then 0 else n

theorem eIdx_involutive : Function.Involutive (eIdx P) := by
  intro n
  unfold eIdx
  split_ifs with h0 hm hm' hm'' hm''' <;> simp_all

theorem eIdx_primrec : Nat.Primrec (eIdx P) := by
  have hc0 : Nat.Primrec (fun n => isZero n) := primrec_isZero
  have hcm : Nat.Primrec (fun n : ℕ => isZero ((n - P.masterIdx) + (P.masterIdx - n)))
     :=
    primrec_isZero.comp
      (primrec_add₂ (primrec_sub₂ primrec_id (Nat.Primrec.const P.masterIdx))
        (primrec_sub₂ (Nat.Primrec.const P.masterIdx) primrec_id))
  have hinner : Nat.Primrec (fun n : ℕ =>
      selectFn (isZero ((n - P.masterIdx) + (P.masterIdx - n))) 0 n) :=
    primrec_ite hcm (Nat.Primrec.const 0) primrec_id
  refine (primrec_ite hc0 (Nat.Primrec.const P.masterIdx) hinner).of_eq (fun n => ?_)
  rcases (show isZero n = 0 ∨ isZero n = 1 from by have := isZero_le_one n; omega)
    with h0 | h0
  · rw [h0, selectFn_zero]
    have hn0 : n = 0 := by intro h; subst h; unfold isZero at h0; omega
    rcases (show isZero ((n - P.masterIdx) + (P.masterIdx - n)) = 0 ∨
        isZero ((n - P.masterIdx) + (P.masterIdx - n)) = 1 from
        by have := isZero_le_one ((n - P.masterIdx) + (P.masterIdx - n)); omega) with
    h1 | h1
    · rw [h1, selectFn_zero]
      have hnm : n = P.masterIdx := by intro h; subst h; unfold isZero at h1; omega
      unfold eIdx
      rw [ite_eq_right hn0, ite_eq_right hnm]
    · rw [h1, selectFn_one]
      have hnm : n = P.masterIdx := by unfold isZero at h1; omega
```

```
      unfold eIdx
      rw [ite_eq_right hn0, ite_eq_left hnm]
  · rw [h0, selectFn_one]
    have hn0 : n = 0 := by unfold isZero at h0; omega
    unfold eIdx
    rw [ite_eq_left hn0]

noncomputable def P0 : ComputablePresentation D :=
  P.reindexInvolutive (eIdx P) (eIdx_involutive P) (eIdx_primrec P)

@[simp] theorem P0_X (n : ℕ) : (P0 P).X n = P.X (eIdx P n) := rfl

noncomputable def datomDec : ℕ → ℕ := fun n => isOne ((DAtom_recDecidable (P0 P)).
    choose n)

noncomputable def atomUCodeState (t : ℕ) : ℕ :=
  t.unpair.2.rec (atomBase t.unpair.1) (fun y IH => atomStep (datomDec P) (Nat.pair t.
    unpair.1 (Nat.pair y IH)))

noncomputable def atomUCode (n k : ℕ) : ℕ := stateCode (atomUCodeState P (Nat.pair k n
    ))

noncomputable def atomUNeg (n k : ℕ) : ℕ := stateNeg (atomUCodeState P (Nat.pair k n))

noncomputable def atomUPos (n k : ℕ) : ℕ := statePos (atomUCodeState P (Nat.pair k n))

noncomputable def atomUEmpty (n k : ℕ) : ℕ := datomDec P (Nat.pair (atomUPos P n k) (
    atomUNeg P n k))

theorem datomDec_spec (posC negC : ℕ) :
    datomDec P (Nat.pair posC negC) = 1 ↔ DAtom (P0 P) (decodeList posC) (decodeList
    negC) = ∅ := by
  unfold datomDec
  rw [isOne_eq_one_iff]
  have h := (DAtom_recDecidable (P0 P)).choose_spec.2 (Nat.pair posC negC)
  dsimp only at h
  rw [unpair_pair_fst, unpair_pair_snd] at h
  exact h.symm

theorem datomDec_le_one (n : ℕ) : datomDec P n ≤ 1 := by unfold datomDec; exact
    isOne_le_one _

theorem DAtom_cons_pos (Q : ComputablePresentation D) (i : ℕ) (pos neg : List ℕ) :
    DAtom Q (i :: pos) neg = idxSet Q.X i ∩ DAtom Q pos neg := by
  unfold DAtom; rw [IPos_cons, Set.inter_assoc]

theorem DAtom_cons_neg (Q : ComputablePresentation D) (j : ℕ) (pos neg : List ℕ) :
    DAtom Q pos (j :: neg) = (Set.univ \ idxSet Q.X j) ∩ DAtom Q pos neg := by
  ext m
  simp only [mem_DAtom, List.mem_cons, Set.mem_inter_iff, Set.mem_sdiff, Set.mem_univ,
    true_and,
    mem_idxSet]
  constructor
  · rintro ⟨hpos, hneg⟩
    exact ⟨hneg j (Or.inl rfl), hpos, fun i hi => hneg i (Or.inr hi)⟩
  · rintro ⟨hj, hpos, hneg⟩
```

```
    exact ⟨hpos, fun i hi => hi.elim (fun h => h ▶ hj) (hneg i)⟩

theorem atomUCodeState_succ (k n : ℕ) :
    atomUCodeState P (Nat.pair k (n + 1)) =
      atomStep (datomDec P) (Nat.pair k (Nat.pair n (atomUCodeState P (Nat.pair k n)))
    ) := by
  unfold atomUCodeState
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem stateRem_atomUCodeState (k n : ℕ) : stateRem (atomUCodeState P (Nat.pair k n))
     = k / 2 ^ n := by
  induction n with
  | zero => simp [atomUCodeState, atomBase]
  | succ n ih =>
    rw [atomUCodeState_succ]
    unfold atomStep
    simp only [wY, wState, unpair_pair_fst, unpair_pair_snd, stateRem_packState, ih,
      Nat.div_div_eq_div_mul, ← pow_succ]

theorem deltaOf_eq_true_iff (k i : ℕ) : deltaOf k i = true ↔ (k / 2 ^ i) % 2 = 1 := by
  unfold deltaOf; simp

theorem atomUPos_succ (k n : ℕ) :
    atomUPos P (n + 1) k =
      selectFn ((k / 2 ^ n) % 2) (Nat.pair n (atomUPos P n k) + 1) (atomUPos P n k) :=
     by
  unfold atomUPos
  rw [atomUCodeState_succ]
  unfold atomStep
  simp only [wY, wState, unpair_pair_fst, unpair_pair_snd, statePos_packState,
    stateRem_atomUCodeState]

theorem atomUNeg_succ (k n : ℕ) :
    atomUNeg P (n + 1) k =
      selectFn ((k / 2 ^ n) % 2) (atomUNeg P n k) (Nat.pair n (atomUNeg P n k) + 1) :=
     by
  unfold atomUNeg
  rw [atomUCodeState_succ]
  unfold atomStep
  simp only [wY, wState, unpair_pair_fst, unpair_pair_snd, stateNeg_packState,
    stateRem_atomUCodeState]

theorem atomUEmpty_eq_one_iff (n k : ℕ) :
    atomUEmpty P n k = 1 ↔ DAtom (P0 P) (decodeList (atomUPos P n k)) (decodeList (
    atomUNeg P n k)) = ∅ :=
  datomDec_spec P _ _

theorem atomUPos_zero (k : ℕ) : atomUPos P 0 k = 0 := by
  simp [atomUPos, atomUCodeState, atomBase]

theorem atomUNeg_zero (k : ℕ) : atomUNeg P 0 k = 0 := by
  simp [atomUNeg, atomUCodeState, atomBase]

namespace atomUCode

theorem zero (k : ℕ) : atomUCode P 0 k = UmasterIdx := by
```

```
  simp [atomUCode, atomUCodeState, atomBase]

theorem succ (k n : ℕ) :
    atomUCode P (n + 1) k =
      selectFn ((k / 2 ^ n) % 2)
        (selectFn (datomDec P (Nat.pair (Nat.pair n (atomUPos P n k) + 1) (atomUNeg P
    n k))) 0
          (selectFn (datomDec P (Nat.pair (atomUPos P n k) (Nat.pair n (atomUNeg P n k
    ) + 1)))
            (atomUCode P n k) (splitULeft (atomUCode P n k))))
        (selectFn (datomDec P (Nat.pair (atomUPos P n k) (Nat.pair n (atomUNeg P n k)
    + 1))) 0
          (selectFn (datomDec P (Nat.pair (Nat.pair n (atomUPos P n k) + 1) (atomUNeg
    P n k)))
            (atomUCode P n k) (splitURight (atomUCode P n k)))) := by
  unfold atomUCode atomUPos atomUNeg
  rw [atomUCodeState_succ]
  unfold atomStep
  simp only [wY, wState, unpair_pair_fst, unpair_pair_snd, stateCode_packState,
    stateRem_atomUCodeState]

end atomUCode

theorem atomUEmpty_succ (k n : ℕ) :
    atomUEmpty P (n + 1) k =
      selectFn ((k / 2 ^ n) % 2)
        (datomDec P (Nat.pair (Nat.pair n (atomUPos P n k) + 1) (atomUNeg P n k)))
        (datomDec P (Nat.pair (atomUPos P n k) (Nat.pair n (atomUNeg P n k) + 1))) :=
    by
  unfold atomUEmpty
  rw [atomUPos_succ, atomUNeg_succ]
  rcases Nat.mod_two_eq_zero_or_one (k / 2 ^ n) with hbit | hbit <;>
    simp only [hbit, selectFn_zero, selectFn_one]

theorem atomUCodeState_congr {n : ℕ} :
    ∀ {k k' : ℕ}, (∀ i < n, deltaOf k i = deltaOf k' i) →
      atomUPos P n k = atomUPos P n k' ∧ atomUNeg P n k = atomUNeg P n k' ∧
        atomUCode P n k = atomUCode P n k' := by
  induction n with
  | zero =>
    intro k k' _
    exact ⟨(atomUPos_zero P k).trans (atomUPos_zero P k').symm,
      (atomUNeg_zero P k).trans (atomUNeg_zero P k').symm,
      (atomUCode.zero P k).trans (atomUCode.zero P k').symm⟩
  | succ n ih =>
    intro k k' h
    obtain ⟨ihpos, ihneg, ihcode⟩ := ih (fun i hi => h i (Nat.lt_succ_of_lt hi))
    have hbit : (k / 2 ^ n) % 2 = (k' / 2 ^ n) % 2 := by
      have hh := h n (Nat.lt_succ_self n)
      rcases Nat.mod_two_eq_zero_or_one (k / 2 ^ n) with h1 | h1 <;>
        rcases Nat.mod_two_eq_zero_or_one (k' / 2 ^ n) with h2 | h2 <;>
          simp_all [deltaOf]
    refine ⟨?_, ?_, ?_⟩
    · rw [atomUPos_succ, atomUPos_succ, ihpos, hbit]
    · rw [atomUNeg_succ, atomUNeg_succ, ihneg, hbit]
    · rw [atomUCode.succ, atomUCode.succ, ihpos, ihneg, ihcode, hbit]
```

```
namespace atomUCode

theorem eq_zero_of_empty {n k : ℕ} (h : atomUEmpty P n k = 1) :
    atomUCode P (n + 1) k = 0 := by
  have hemp : DAtom (P0 P) (decodeList (atomUPos P n k)) (decodeList (atomUNeg P n k))
    = ∅ :=
    (atomUEmpty_eq_one_iff P n k).mp h
  have hI : datomDec P (Nat.pair (Nat.pair n (atomUPos P n k) + 1) (atomUNeg P n k)) =
    1 := by
    refine (datomDec_spec P _ _).mpr ?_
    rw [decodeList_succ, unpair_pair_fst, unpair_pair_snd, DAtom_cons_pos]
    exact Set.subset_empty_iff.mp (hemp ▸ Set.inter_subset_right)
  have hJ : datomDec P (Nat.pair (atomUPos P n k) (Nat.pair n (atomUNeg P n k) + 1)) =
    1 := by
    refine (datomDec_spec P _ _).mpr ?_
    rw [decodeList_succ, unpair_pair_fst, unpair_pair_snd, DAtom_cons_neg]
    exact Set.subset_empty_iff.mp (hemp ▸ Set.inter_subset_right)
  rw [succ, hI, hJ]
  rcases Nat.mod_two_eq_zero_or_one (k / 2 ^ n) with hbit | hbit <;>
    simp [hbit, selectFn_zero, selectFn_one]

theorem subset {n k : ℕ} (h : atomUEmpty P (n + 1) k = 0) :
    UX (atomUCode P (n + 1) k) ⊆ UX (atomUCode P n k) := by
  have hemp := h
  rw [atomUEmpty_succ] at hemp
  rw [succ]
  set posC := atomUPos P n k
  set negC := atomUNeg P n k
  set c := atomUCode P n k
  rcases Nat.mod_two_eq_zero_or_one (k / 2 ^ n) with hbit | hbit
  · simp only [hbit, selectFn_zero] at hemp ⊢
    rw [hemp, selectFn_zero]
    have hle := datomDec_le_one P (Nat.pair (Nat.pair n posC + 1) negC)
    rcases (by omega : datomDec P (Nat.pair (Nat.pair n posC + 1) negC) = 0 ∨
        datomDec P (Nat.pair (Nat.pair n posC + 1) negC) = 1) with h2 | h2
    · rw [h2, selectFn_zero, UX_splitURight]; exact Set.inter_subset_left
    · rw [h2, selectFn_one]
  · simp only [hbit, selectFn_one] at hemp ⊢
    rw [hemp, selectFn_zero]
    have hle := datomDec_le_one P (Nat.pair posC (Nat.pair n negC + 1))
    rcases (by omega : datomDec P (Nat.pair posC (Nat.pair n negC + 1)) = 0 ∨
        datomDec P (Nat.pair posC (Nat.pair n negC + 1)) = 1) with h2 | h2
    · rw [h2, selectFn_zero, UX_splitULeft]; exact Set.inter_subset_left
    · rw [h2, selectFn_one]

theorem mem (n k : ℕ) : U.mem (UX (atomUCode P n k)) := U_mem_UX _
end atomUCode

theorem atomUEmpty_congr {n k k' : ℕ} (h : ∀ i < n, deltaOf k i = deltaOf k' i) :
    atomUEmpty P n k = atomUEmpty P n k' := by
  obtain ⟨hpos, hneg, -⟩ := atomUCodeState_congr P h
  unfold atomUEmpty
  rw [hpos, hneg]

theorem atomUEmpty_zero_or_one (n k : ℕ) : atomUEmpty P n k = 0 ∨ atomUEmpty P n k = 1
```

```
    := by
  have h := datomDec_le_one P (Nat.pair (atomUPos P n k) (atomUNeg P n k))
  unfold atomUEmpty
  omega

end DomainTheory.NeighbourhoodSystems
```

YseqCode.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomUCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.UX

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive

variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)

noncomputable def yFoldStep (w : ℕ) : ℕ :=
  let n := w.unpair.1
  let i := w.unpair.2.unpair.1
  let acc := w.unpair.2.unpair.2
  let k := i + 2 ^ n
  selectFn (atomUEmpty P (n + 1) k) acc
    (selectFn acc.unpair.1
      (Nat.pair 1 (unionUX acc.unpair.2 (atomUCode P (n + 1) k)))
      (Nat.pair 1 (atomUCode P (n + 1) k)))

noncomputable def yFold (n N : ℕ) : ℕ :=
  N.rec (Nat.pair 0 0) (fun i acc => yFoldStep P (Nat.pair n (Nat.pair i acc)))

noncomputable def YseqCode (n : ℕ) : ℕ := (yFold P n (2 ^ n)).unpair.2

def Yc (m : ℕ) : Set ? := UX (YseqCode P m)

theorem yFoldStep_eq (n i acc : ℕ) :
    yFoldStep P (Nat.pair n (Nat.pair i acc)) =
      selectFn (atomUEmpty P (n + 1) (i + 2 ^ n)) acc
        (selectFn acc.unpair.1
          (Nat.pair 1 (unionUX acc.unpair.2 (atomUCode P (n + 1) (i + 2 ^ n))))
          (Nat.pair 1 (atomUCode P (n + 1) (i + 2 ^ n)))) := by
  unfold yFoldStep
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem yFold_succ (n N : ℕ) :
    yFold P n (N + 1) = yFoldStep P (Nat.pair n (Nat.pair N (yFold P n N))) := rfl

theorem yFold_zero (n : ℕ) : yFold P n 0 = Nat.pair 0 0 := rfl

theorem yFold_found_le_one (n : ℕ) : ∀ N, (yFold P n N).unpair.1 ≤ 1 := by
  intro N
```

```
  induction N with
  | zero => simp [yFold_zero]
  | succ N ih =>
    rw [yFold_succ, yFoldStep_eq]
    rcases atomUEmpty_zero_or_one P (n + 1) (N + 2 ^ n) with h0 | h1
    · rw [h0, selectFn_zero]
      rcases Nat.eq_zero_or_pos (yFold P n N).unpair.1 with hf0 | hfpos
      · rw [show (yFold P n N).unpair.1 = 0 from hf0, selectFn_zero, unpair_pair_fst]
      · rw [show (yFold P n N).unpair.1 = 1 from by omega, selectFn_one,
    unpair_pair_fst]
    · rw [h1, selectFn_one]; exact ih

theorem yFold_found_iff (n : ℕ) :
    ∀ N, (yFold P n N).unpair.1 = 1 ↔ ∃ i < N, atomUEmpty P (n + 1) (i + 2 ^ n) = 0 :=
     by
  intro N
  induction N with
  | zero => simp [yFold_zero]
  | succ N ih =>
    rw [yFold_succ, yFoldStep_eq]
    rcases atomUEmpty_zero_or_one P (n + 1) (N + 2 ^ n) with h0 | h1
    · rw [h0, selectFn_zero]
      have hval1 : (selectFn (yFold P n N).unpair.1
          (Nat.pair 1 (unionUX (yFold P n N).unpair.2 (atomUCode P (n + 1) (N + 2 ^ n)
    )))
          (Nat.pair 1 (atomUCode P (n + 1) (N + 2 ^ n)))).unpair.1 = 1 := by
        have hle := yFold_found_le_one P n N
        rcases Nat.eq_zero_or_pos (yFold P n N).unpair.1 with hf | hf
        · rw [show (yFold P n N).unpair.1 = 0 from hf, selectFn_zero, unpair_pair_fst]
        · rw [show (yFold P n N).unpair.1 = 1 from by omega, selectFn_one,
    unpair_pair_fst]
      rw [hval1]
      exact ⟨fun _ => ⟨N, Nat.lt_succ_self N, h0⟩, fun _ => rfl⟩
    · rw [h1, selectFn_one, ih]
      constructor
      · rintro ⟨i, hi, hie⟩; exact ⟨i, Nat.lt_succ_of_lt hi, hie⟩
      · rintro ⟨i, hi, hie⟩
        rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
        · exact ⟨i, hi', hie⟩
        · exact absurd hie (by omega)

end DomainTheory.NeighbourhoodSystems
```

xStepG.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    domainIso812c

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718
```

```
section StepGen

variable {α β : Type*}

noncomputable def xStepG (splitX : Set α → Set β → Set α → Set β × Set β)
    (A : Set α) (B : Set β) (Xn : Set α) (b : Bool) : Set α × Set β :=
  xyStep splitX A B Xn b

end StepGen

namespace xStepG
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section StepGen

variable {α β : Type*}

theorem disjoint_of_ne {D₁ : NeighborhoodSystem β}
    {splitX : Set α → Set β → Set α → Set β × Set β} (hxSplit : SplitSpec' D₁ splitX
    )
    {A : Set α} {B : Set β} (hAB : A = ∅ ↔ B = ∅) (hBmem : B = ∅ ∨ D₁.mem B) (Xn : Set
     α)
    {b b' : Bool} (hbb' : b = b') :
    (xStepG splitX A B Xn b).1 ∩ (xStepG splitX A B Xn b').1 = ∅ ∧
      (xStepG splitX A B Xn b).2 ∩ (xStepG splitX A B Xn b').2 = ∅ :=
  xyStep_disjoint_of_ne hxSplit hAB hBmem Xn hbb'

theorem fst_subset (splitX : Set α → Set β → Set α → Set β × Set β)
    (A : Set α) (B : Set β) (Xn : Set α) (b : Bool) : (xStepG splitX A B Xn b).1 ⊆ A
    := by
  by_cases hb : b = true
  · simp only [xStepG, xyStep, hb, ite_true]; exact Set.inter_subset_left
  · simp only [xStepG, xyStep, hb]; exact Set.sdiff_subset

theorem fst_union (splitX : Set α → Set β → Set α → Set β × Set β)
    (A : Set α) (B : Set β) (Xn : Set α) :
    (xStepG splitX A B Xn true).1 ∪ (xStepG splitX A B Xn false).1 = A := by
  simp only [xStepG, xyStep]
  exact Set.inter_union_sdiff A Xn

theorem snd_subset {D₁ : NeighborhoodSystem β}
    {splitX : Set α → Set β → Set α → Set β × Set β} (hxSplit : SplitSpec' D₁ splitX
    )
    {A : Set α} {B : Set β} (hAB : A = ∅ ↔ B = ∅) (hBmem : B = ∅ ∨ D₁.mem B) (Xn : Set
     α)
    (b : Bool) : (xStepG splitX A B Xn b).2 ⊆ B := by
  have hspec := hxSplit hAB hBmem Xn
  by_cases hb : b = true
  · simp only [xStepG, xyStep, hb, ite_true]; exact Set.subset_union_left.trans_eq
    hspec.2.2.2.2.1
  · simp only [xStepG, xyStep, hb]; exact Set.subset_union_right.trans_eq hspec
    .2.2.2.2.1

theorem snd_union {D₁ : NeighborhoodSystem β}
    {splitX : Set α → Set β → Set α → Set β × Set β} (hxSplit : SplitSpec' D₁ splitX
    )
```

```
    {A : Set α} {B : Set β} (hAB : A = ∅ ↔ B = ∅) (hBmem : B = ∅ ∨ D₁.mem B) (Xn : Set
     α) :
    (xStepG splitX A B Xn true).2 ∪ (xStepG splitX A B Xn false).2 = B := by
  have hspec := hxSplit hAB hBmem Xn
  simp only [xStepG, xyStep]
  exact hspec.2.2.2.2.1

end StepGen

end xStepG

end DomainTheory.NeighbourhoodSystems
```

yStepG.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.xStepG

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section StepGen

variable {α β : Type*}

noncomputable def yStepG (splitY : Set β → Set α → Set β → Set α × Set α)
    (A1 : Set α) (B1 : Set β) (Yn : Set β) (b : Bool) : Set α × Set β :=
  (xyStep splitY B1 A1 Yn b).swap

end StepGen

namespace yStepG
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section StepGen

variable {α β : Type*}

theorem disjoint_of_ne {D₀ : NeighborhoodSystem α}
    {splitY : Set β → Set α → Set β → Set α × Set α} (hySplit : SplitSpec' D₀ splitY
    )
    {A1 : Set α} {B1 : Set β} (hBA : B1 = ∅ ↔ A1 = ∅) (hAmem : A1 = ∅ ∨ D₀.mem A1) (Yn
     : Set β)
    {b b' : Bool} (hbb' : b = b') :
    (yStepG splitY A1 B1 Yn b).1 ∩ (yStepG splitY A1 B1 Yn b').1 = ∅ ∧
      (yStepG splitY A1 B1 Yn b).2 ∩ (yStepG splitY A1 B1 Yn b').2 = ∅ := by
  have h := xyStep_disjoint_of_ne hySplit hBA hAmem Yn hbb'
  exact ⟨h.2, h.1⟩

theorem fst_subset {D₀ : NeighborhoodSystem α}
    {splitY : Set β → Set α → Set β → Set α × Set α} (hySplit : SplitSpec' D₀ splitY
    )
```

```
    {A1 : Set α} {B1 : Set β} (hBA : B1 = ∅ ↔ A1 = ∅) (hAmem : A1 = ∅ ∨ D₀.mem A1) (Yn
     : Set β)
    (b : Bool) : (yStepG splitY A1 B1 Yn b).1 ⊆ A1 := by
  have hspec := hySplit hBA hAmem Yn
  by_cases hb : b = true
  · simp only [yStepG, xyStep, Prod.swap, hb, ite_true]
    exact Set.subset_union_left.trans_eq hspec.2.2.2.2.1
  · simp only [yStepG, xyStep, Prod.swap, hb]
    exact Set.subset_union_right.trans_eq hspec.2.2.2.2.1

theorem fst_union {D₀ : NeighborhoodSystem α}
    {splitY : Set β → Set α → Set β → Set α × Set α} (hySplit : SplitSpec' D₀ splitY
    )
    {A1 : Set α} {B1 : Set β} (hBA : B1 = ∅ ↔ A1 = ∅) (hAmem : A1 = ∅ ∨ D₀.mem A1) (Yn
     : Set β) :
    (yStepG splitY A1 B1 Yn true).1 ∪ (yStepG splitY A1 B1 Yn false).1 = A1 := by
  have hspec := hySplit hBA hAmem Yn
  simp only [yStepG, xyStep, Prod.swap]
  exact hspec.2.2.2.2.1

theorem snd_subset (splitY : Set β → Set α → Set β → Set α × Set α)
    (A1 : Set α) (B1 : Set β) (Yn : Set β) (b : Bool) : (yStepG splitY A1 B1 Yn b).2 ⊆
     B1 := by
  by_cases hb : b = true
  · simp only [yStepG, xyStep, Prod.swap, hb, ite_true]; exact Set.inter_subset_left
  · simp only [yStepG, xyStep, Prod.swap, hb]; exact Set.sdiff_subset

theorem snd_union (splitY : Set β → Set α → Set β → Set α × Set α)
    (A1 : Set α) (B1 : Set β) (Yn : Set β) :
    (yStepG splitY A1 B1 Yn true).2 ∪ (yStepG splitY A1 B1 Yn false).2 = B1 := by
  simp only [yStepG, xyStep, Prod.swap]
  exact Set.inter_union_sdiff B1 Yn

end StepGen

end yStepG

end DomainTheory.NeighbourhoodSystems
```

atomPairG.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.xStepG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.yStepG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.deltaPair
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableDiff
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableSplit

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718
```

```
section AtomPairGen

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

noncomputable def atomPairG (? : ℕ → Bool × Bool) : ℕ → Set α × Set β
  | 0 => (D₀.master, D₁.master)
  | (n + 1) =>
      let A := (atomPairG ? n).1
      let B := (atomPairG ? n).2
      let IJ1 := splitX A B (X n)
      let A1 := if (? n).1 then A ∩ X n else A \ X n
      let B1 := if (? n).1 then IJ1.1 else IJ1.2
      let IJ2 := splitY B1 A1 (Y n)
      let B2 := if (? n).2 then B1 ∩ Y n else B1 \ Y n
      let A2 := if (? n).2 then IJ2.1 else IJ2.2
      (A2, B2)

end AtomPairGen

namespace atomPairG
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section AtomPairGen

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hySplit hD₁pos hD₁diff hxSplit hXmem hYmem hD₀mne hD₁mne

omit hD₀pos hD₀diff hySplit hD₁pos hD₁diff hxSplit hXmem hYmem hD₀mne hD₁mne in

theorem congr {? ?' : ℕ → Bool × Bool} {n : ℕ} (h : ∀ i < n, ? i = ?' i) :
    atomPairG D₀ D₁ splitY splitX X Y ? n = atomPairG D₀ D₁ splitY splitX X Y ?' n :=
    by
  induction n with
  | zero => rfl
  | succ n ih =>
    have hprev : atomPairG D₀ D₁ splitY splitX X Y ? n =
        atomPairG D₀ D₁ splitY splitX X Y ?' n := ih (fun i hi => h i (Nat.
    lt_succ_of_lt hi))
    have hn : ? n = ?' n := h n (Nat.lt_succ_self n)
    show
```

```
      (let A := (atomPairG D₀ D₁ splitY splitX X Y ? n).1
       let B := (atomPairG D₀ D₁ splitY splitX X Y ? n).2
       let IJ1 := splitX A B (X n)
       let A1 := if (? n).1 then A ∩ X n else A \ X n
       let B1 := if (? n).1 then IJ1.1 else IJ1.2
       let IJ2 := splitY B1 A1 (Y n)
       let B2 := if (? n).2 then B1 ∩ Y n else B1 \ Y n
       let A2 := if (? n).2 then IJ2.1 else IJ2.2
       (A2, B2)) =
        (let A := (atomPairG D₀ D₁ splitY splitX X Y ?' n).1
         let B := (atomPairG D₀ D₁ splitY splitX X Y ?' n).2
         let IJ1 := splitX A B (X n)
         let A1 := if (?' n).1 then A ∩ X n else A \ X n
         let B1 := if (?' n).1 then IJ1.1 else IJ1.2
         let IJ2 := splitY B1 A1 (Y n)
         let B2 := if (?' n).2 then B1 ∩ Y n else B1 \ Y n
         let A2 := if (?' n).2 then IJ2.1 else IJ2.2
         (A2, B2))
    rw [hprev, hn]

end AtomPairGen

section AtomPairGen

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hySplit hD₁pos hD₁diff hxSplit hXmem hYmem hD₀mne hD₁mne

theorem invariant (? : ℕ → Bool × Bool) :
    ∀ n, ((atomPairG D₀ D₁ splitY splitX X Y ? n).1 = ∅ ↔
        (atomPairG D₀ D₁ splitY splitX X Y ? n).2 = ∅) ∧
      ((atomPairG D₀ D₁ splitY splitX X Y ? n).1 = ∅ ∨
        D₀.mem (atomPairG D₀ D₁ splitY splitX X Y ? n).1) ∧
      ((atomPairG D₀ D₁ splitY splitX X Y ? n).2 = ∅ ∨
        D₁.mem (atomPairG D₀ D₁ splitY splitX X Y ? n).2) := by
  intro n
  induction n with
  | zero =>
    refine ⟨?_, Or.inr D₀.master_mem, Or.inr D₁.master_mem⟩
    show (D₀.master = ∅ ↔ D₁.master = ∅)
    exact ⟨fun h => absurd h hD₀mne.ne_empty, fun h => absurd h hD₁mne.ne_empty⟩
  | succ n ih =>
    obtain ⟨ihAB, ihA, ihB⟩ := ih
    set A := (atomPairG D₀ D₁ splitY splitX X Y ? n).1 with hAdef
    set B := (atomPairG D₀ D₁ splitY splitX X Y ? n).2 with hBdef
    have hspec1 := hxSplit ihAB ihB (X n)
    set I1 := (splitX A B (X n)).1 with hI1def
    set J1 := (splitX A B (X n)).2 with hJ1def
```

```
    set A1 := (if (? n).1 then A ∩ X n else A \ X n) with hA1def
    set B1 := (if (? n).1 then I1 else J1) with hB1def
    have hA1B1 : A1 = ∅ ↔ B1 = ∅ := by
      by_cases h?1 : (? n).1 = true
      · simp only [hA1def, hB1def, h?1, ite_true]; exact hspec1.2.2.1
      · simp only [hA1def, hB1def, h?1]; exact hspec1.2.2.2.1
    have hA1mem : A1 = ∅ ∨ D₀.mem A1 := by
      by_cases h?1 : (? n).1 = true
      · simp only [hA1def, h?1, ite_true]; exact inter.mem_or_empty hD₀pos ihA (hXmem n
    )
      · simp only [hA1def, h?1]; exact diff.mem_or_empty hD₀diff ihA (hXmem n)
    have hB1mem : B1 = ∅ ∨ D₁.mem B1 := by
      by_cases h?1 : (? n).1 = true
      · simp only [hB1def, h?1, ite_true]; exact hspec1.1
      · simp only [hB1def, h?1]; exact hspec1.2.1
    have hspec2 := hySplit hA1B1.symm hA1mem (Y n)
    set I2 := (splitY B1 A1 (Y n)).1 with hI2def
    set J2 := (splitY B1 A1 (Y n)).2 with hJ2def
    set B2 := (if (? n).2 then B1 ∩ Y n else B1 \ Y n) with hB2def
    set A2 := (if (? n).2 then I2 else J2) with hA2def
    have hB2A2 : B2 = ∅ ↔ A2 = ∅ := by
      by_cases h?2 : (? n).2 = true
      · simp only [hB2def, hA2def, h?2, ite_true]; exact hspec2.2.2.1
      · simp only [hB2def, hA2def, h?2]; exact hspec2.2.2.2.1
    have hB2mem : B2 = ∅ ∨ D₁.mem B2 := by
      by_cases h?2 : (? n).2 = true
      · simp only [hB2def, h?2, ite_true]; exact inter.mem_or_empty hD₁pos hB1mem (
    hYmem n)
      · simp only [hB2def, h?2]; exact diff.mem_or_empty hD₁diff hB1mem (hYmem n)
    have hA2mem : A2 = ∅ ∨ D₀.mem A2 := by
      by_cases h?2 : (? n).2 = true
      · simp only [hA2def, h?2, ite_true]; exact hspec2.1
      · simp only [hA2def, h?2]; exact hspec2.2.1
    show (A2 = ∅ ↔ B2 = ∅) ∧ (A2 = ∅ ∨ D₀.mem A2) ∧ (B2 = ∅ ∨ D₁.mem B2)
    exact ⟨hB2A2.symm, hA2mem, hB2mem⟩

end AtomPairGen

section AtomPairGen

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

theorem succ_eq (? : ℕ → Bool × Bool) (n : ℕ) :
    atomPairG D₀ D₁ splitY splitX X Y ? (n + 1) =
      yStepG splitY
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) (? n).1).1
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) (? n).1).2
        (Y n) (? n).2 := rfl
```

```
end AtomPairGen

section AtomPairGen

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hySplit hD₁pos hD₁diff hxSplit hXmem hYmem hD₀mne hD₁mne

theorem fst_union_step (? : ℕ → Bool × Bool) (n : ℕ) :
    ((yStepG splitY (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) true).1
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) true).2 (Y n) true).1 ∪
      (yStepG splitY (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) true).1
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) true).2 (Y n) false).1) ∪
    ((yStepG splitY (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) false).1
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) false).2 (Y n) true).1 ∪
      (yStepG splitY (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) false).1
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) false).2 (Y n) false).1) =
      (atomPairG D₀ D₁ splitY splitX X Y ? n).1 := by
  obtain ⟨ihAB, ihA, ihB⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁
    pos hD₁diff
    splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne ? n
  set A := (atomPairG D₀ D₁ splitY splitX X Y ? n).1 with hAdef
  set B := (atomPairG D₀ D₁ splitY splitX X Y ? n).2 with hBdef
  have hspec1 := hxSplit ihAB ihB (X n)
  have hBAtrue : (xStepG splitX A B (X n) true).2 = ∅ ↔ (xStepG splitX A B (X n) true)
    .1 = ∅ := by
    simp only [xStepG, xyStep, ite_true]; exact hspec1.2.2.1.symm
  have hAmemtrue : (xStepG splitX A B (X n) true).1 = ∅ ∨ D₀.mem (xStepG splitX A B (X
    n) true).1 := by
    simp only [xStepG, xyStep, ite_true]; exact inter.mem_or_empty hD₀pos ihA (hXmem n)
  have hBAfalse : (xStepG splitX A B (X n) false).2 = ∅ ↔ (xStepG splitX A B (X n)
    false).1 = ∅ := by
    simp only [xStepG, xyStep]; exact hspec1.2.2.2.1.symm
  have hAmemfalse : (xStepG splitX A B (X n) false).1 = ∅ ∨ D₀.mem (xStepG splitX A B (
    X n) false).1 := by
    simp only [xStepG, xyStep]; exact diff.mem_or_empty hD₀diff ihA (hXmem n)
  rw [yStepG.fst_union hySplit hBAtrue hAmemtrue (Y n),
    yStepG.fst_union hySplit hBAfalse hAmemfalse (Y n)]
  exact xStepG.fst_union splitX A B (X n)
```

```
end AtomPairGen

section AtomPairGen

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hySplit hD₁pos hD₁diff hxSplit hXmem hYmem hD₀mne hD₁mne

theorem master_covered (n : ℕ) :
    ∀ z ∈ D₀.master, ∃ ?' : Fin n → Bool × Bool,
      z ∈ (atomPairG D₀ D₁ splitY splitX X Y (extendTruePair ?') n).1 := by
  induction n with
  | zero => exact fun z hz => ⟨Fin.elim0, hz⟩
  | succ n ih =>
    intro z hz
    obtain ⟨?'₀, h?'₀⟩ := ih z hz
    have hcover := atomPairG.fst_union_step D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos
    hD₁diff
      splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne (extendTruePair ?'₀) n
    set A := (atomPairG D₀ D₁ splitY splitX X Y (extendTruePair ?'₀) n).1 with hAdef
    set B := (atomPairG D₀ D₁ splitY splitX X Y (extendTruePair ?'₀) n).2 with hBdef
    have step : ∀ b1 b2 : Bool,
        z ∈ (yStepG splitY (xStepG splitX A B (X n) b1).1 (xStepG splitX A B (X n) b1)
    .2
          (Y n) b2).1 →
        ∃ ?' : Fin (n + 1) → Bool × Bool,
          z ∈ (atomPairG D₀ D₁ splitY splitX X Y (extendTruePair ?') (n + 1)).1 := by
      intro b1 b2 hz'
      set ?'' := Function.update (extendTruePair ?'₀) n (b1, b2) with h?''def
      refine ⟨restrictFinPair ?'' (n + 1), ?_⟩
      have hagree : ∀ i < n + 1, extendTruePair (restrictFinPair ?'' (n + 1)) i = ?'' i
     :=
        fun i hi => extendTruePair_restrictFinPair_agree ?'' (n + 1) i hi
      rw [atomPairG.congr D₀ D₁ splitY splitX X Y hagree, atomPairG.succ_eq]
      have hagreeN : ∀ i < n, ?'' i = extendTruePair ?'₀ i := by
        intro i hi
        simp [h?''def, Function.update_of_ne (ne_of_lt hi)]
      have hbit : ?'' n = (b1, b2) := by simp [h?''def]
      rw [atomPairG.congr D₀ D₁ splitY splitX X Y hagreeN, hbit]
      exact hz'
    rw [← hcover] at h?'₀
    simp only [Set.mem_union] at h?'₀
    rcases h?'₀ with (h1 | h2) | (h3 | h4)
    · exact step true true h1
    · exact step true false h2
    · exact step false true h3
    · exact step false false h4
```

```
end AtomPairGen

section AtomPairGenDelta

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hySplit hD₁pos hD₁diff hxSplit hXmem hYmem hD₀mne hD₁mne in

theorem master_covered_deltaPair (n : ℕ) :
    ∀ z ∈ D₀.master, ∃ i < 4 ^ n, z ∈ (atomPairG D₀ D₁ splitY splitX X Y (deltaPair i)
    n).1 := by
  intro z hz
  obtain ⟨?', h?'⟩ := atomPairG.master_covered D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁
    pos hD₁diff
    splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne n z hz
  refine ⟨encodeDeltaPair (extendTruePair ?') n, encodeDeltaPair.lt _ n, ?_⟩
  rw [atomPairG.congr D₀ D₁ splitY splitX X Y
    (fun i hi => deltaPair.encodeDeltaPair (extendTruePair ?') n i hi)]
  exact h?'

end AtomPairGenDelta

section AtomPairGen

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hySplit hD₁pos hD₁diff hxSplit hXmem hYmem hD₀mne hD₁mne

theorem snd_union_step (? : ℕ → Bool × Bool) (n : ℕ) :
    ((yStepG splitY (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) true).1
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) true).2 (Y n) true).2 ∪
      (yStepG splitY (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) true).1
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) true).2 (Y n) false).2) ∪
    ((yStepG splitY (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) false).1
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
```

```
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) false).2 (Y n) true).2 ∪
      (yStepG splitY (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) false).1
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) false).2 (Y n) false).2) =
      (atomPairG D₀ D₁ splitY splitX X Y ? n).2 := by
  obtain ⟨ihAB, ihA, ihB⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁
    pos hD₁diff
    splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne ? n
  set A := (atomPairG D₀ D₁ splitY splitX X Y ? n).1 with hAdef
  set B := (atomPairG D₀ D₁ splitY splitX X Y ? n).2 with hBdef
  rw [yStepG.snd_union splitY (xStepG splitX A B (X n) true).1 (xStepG splitX A B (X n
    ) true).2
      (Y n),
    yStepG.snd_union splitY (xStepG splitX A B (X n) false).1 (xStepG splitX A B (X n)
     false).2
      (Y n)]
  exact xStepG.snd_union hxSplit ihAB ihB (X n)

end AtomPairGen

section AtomPairGen

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hySplit hD₁pos hD₁diff hxSplit hXmem hYmem hD₀mne hD₁mne

theorem master_covered_snd (n : ℕ) :
    ∀ z ∈ D₁.master, ∃ ?' : Fin n → Bool × Bool,
      z ∈ (atomPairG D₀ D₁ splitY splitX X Y (extendTruePair ?') n).2 := by
  induction n with
  | zero => exact fun z hz => ⟨Fin.elim0, hz⟩
  | succ n ih =>
    intro z hz
    obtain ⟨?'₀, h?'₀⟩ := ih z hz
    have hcover := atomPairG.snd_union_step D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos
    hD₁diff
      splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne (extendTruePair ?'₀) n
    set A := (atomPairG D₀ D₁ splitY splitX X Y (extendTruePair ?'₀) n).1 with hAdef
    set B := (atomPairG D₀ D₁ splitY splitX X Y (extendTruePair ?'₀) n).2 with hBdef
    have step : ∀ b1 b2 : Bool,
        z ∈ (yStepG splitY (xStepG splitX A B (X n) b1).1 (xStepG splitX A B (X n) b1)
    .2
          (Y n) b2).2 →
        ∃ ?' : Fin (n + 1) → Bool × Bool,
          z ∈ (atomPairG D₀ D₁ splitY splitX X Y (extendTruePair ?') (n + 1)).2 := by
      intro b1 b2 hz'
      set ?'' := Function.update (extendTruePair ?'₀) n (b1, b2) with h?''def
```

```
      refine ⟨restrictFinPair ?'' (n + 1), ?_⟩
      have hagree : ∀ i < n + 1, extendTruePair (restrictFinPair ?'' (n + 1)) i = ?'' i
     :=
        fun i hi => extendTruePair_restrictFinPair_agree ?'' (n + 1) i hi
      rw [atomPairG.congr D₀ D₁ splitY splitX X Y hagree, atomPairG.succ_eq]
      have hagreeN : ∀ i < n, ?'' i = extendTruePair ?'₀ i := by
        intro i hi
        simp [h?''def, Function.update_of_ne (ne_of_lt hi)]
      have hbit : ?'' n = (b1, b2) := by simp [h?''def]
      rw [atomPairG.congr D₀ D₁ splitY splitX X Y hagreeN, hbit]
      exact hz'
    rw [← hcover] at h?'₀
    simp only [Set.mem_union] at h?'₀
    rcases h?'₀ with (h1 | h2) | (h3 | h4)
    · exact step true true h1
    · exact step true false h2
    · exact step false true h3
    · exact step false false h4

end AtomPairGen

section AtomPairGenDelta

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)

  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hySplit hD₁pos hD₁diff hxSplit hXmem hYmem hD₀mne hD₁mne in

theorem master_covered_deltaPair_snd (n : ℕ) :
    ∀ z ∈ D₁.master, ∃ i < 4 ^ n, z ∈ (atomPairG D₀ D₁ splitY splitX X Y (deltaPair i)
    n).2 := by
  intro z hz
  obtain ⟨?', h?'⟩ := atomPairG.master_covered_snd D₀ D₁ hD₀pos hD₀diff splitY hySplit
    hD₁pos
    hD₁diff splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne n z hz
  refine ⟨encodeDeltaPair (extendTruePair ?') n, encodeDeltaPair.lt _ n, ?_⟩
  rw [atomPairG.congr D₀ D₁ splitY splitX X Y
    (fun i hi => deltaPair.encodeDeltaPair (extendTruePair ?') n i hi)]
  exact h?'

end AtomPairGenDelta

end atomPairG

end DomainTheory.NeighbourhoodSystems
```

atomPairG_more.lean

```
module
```

```
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomPairG

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

namespace xStepG
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section AtomPairGen

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hySplit hD₁pos hD₁diff hxSplit hXmem hYmem hD₀mne hD₁mne

theorem spec (? : ℕ → Bool × Bool) (n : ℕ) :
    ((xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
        (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) (? n).1).2 = ∅ ↔
      (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
        (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) (? n).1).1 = ∅) ∧
      ((xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) (? n).1).1 = ∅ ∨
        D₀.mem (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) (? n).1).1) := by
  obtain ⟨ihAB, ihA, ihB⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁
    pos hD₁diff
    splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne ? n
  set A := (atomPairG D₀ D₁ splitY splitX X Y ? n).1 with hAdef
  set B := (atomPairG D₀ D₁ splitY splitX X Y ? n).2 with hBdef
  have hspec1 := hxSplit ihAB ihB (X n)
  refine ⟨?_, ?_⟩
  · by_cases h?1 : (? n).1 = true
    · simp only [xStepG, xyStep, h?1, ite_true]; exact hspec1.2.2.1.symm
    · simp only [xStepG, xyStep, h?1]; exact hspec1.2.2.2.1.symm
  · by_cases h?1 : (? n).1 = true
    · simp only [xStepG, xyStep, h?1, ite_true]; exact inter.mem_or_empty hD₀pos ihA (
    hXmem n)
    · simp only [xStepG, xyStep, h?1]; exact diff.mem_or_empty hD₀diff ihA (hXmem n)

end AtomPairGen

end xStepG

namespace atomPairG
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718
```

```
section AtomPairGen

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hySplit hD₁pos hD₁diff hxSplit hXmem hYmem hD₀mne hD₁mne

theorem fst_subset (? : ℕ → Bool × Bool) (n : ℕ) :
    (atomPairG D₀ D₁ splitY splitX X Y ? (n + 1)).1 ⊆
      (atomPairG D₀ D₁ splitY splitX X Y ? n).1 := by
  rw [atomPairG.succ_eq]
  obtain ⟨hspecAB, hspecAmem⟩ := xStepG.spec D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos
    hD₁diff
    splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne ? n
  exact (yStepG.fst_subset hySplit hspecAB hspecAmem (Y n) (? n).2).trans
    (xStepG.fst_subset splitX _ _ (X n) (? n).1)

end AtomPairGen

section AtomPairGen

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hySplit hD₁pos hD₁diff hxSplit hXmem hYmem hD₀mne hD₁mne

theorem fst_subset_master (? : ℕ → Bool × Bool) (n : ℕ) :
    (atomPairG D₀ D₁ splitY splitX X Y ? n).1 ⊆ D₀.master := by
  induction n with
  | zero => exact subset_rfl
  | succ n ih => exact (atomPairG.fst_subset D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos
    hD₁diff
      splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne ? n).trans ih

end AtomPairGen

section AtomPairGen

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
```

```
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hySplit hD₁pos hD₁diff hxSplit hXmem hYmem hD₀mne hD₁mne

theorem snd_subset (? : ℕ → Bool × Bool) (n : ℕ) :
    (atomPairG D₀ D₁ splitY splitX X Y ? (n + 1)).2 ⊆
      (atomPairG D₀ D₁ splitY splitX X Y ? n).2 := by
  rw [atomPairG.succ_eq]
  obtain ⟨ihAB, -, ihB⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁
    pos hD₁diff
    splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne ? n
  exact (yStepG.snd_subset splitY _ _ (Y n) (? n).2).trans
    (xStepG.snd_subset hxSplit ihAB ihB (X n) (? n).1)

end AtomPairGen

section AtomPairGen

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hySplit hD₁pos hD₁diff hxSplit hXmem hYmem hD₀mne hD₁mne

theorem disjoint (? ?' : ℕ → Bool × Bool) :
    ∀ n, (∃ i < n, ? i = ?' i) →
      (atomPairG D₀ D₁ splitY splitX X Y ? n).1 ∩
          (atomPairG D₀ D₁ splitY splitX X Y ?' n).1 = ∅ ∧
        (atomPairG D₀ D₁ splitY splitX X Y ? n).2 ∩
          (atomPairG D₀ D₁ splitY splitX X Y ?' n).2 = ∅ := by
  intro n
  induction n with
  | zero => rintro ⟨i, hi, -⟩; exact absurd hi (Nat.not_lt_zero i)
  | succ n ih =>
    rintro ⟨i, hi, hine⟩
    by_cases hagree : ∀ j < n, ? j = ?' j
    · have h?n : ? n = ?' n := by
        intro heq
        exact hine (by
          rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
          · exact hagree i hi'
          · exact heq)
      have hpairEq : atomPairG D₀ D₁ splitY splitX X Y ? n =
          atomPairG D₀ D₁ splitY splitX X Y ?' n :=
        atomPairG.congr D₀ D₁ splitY splitX X Y hagree
      have hAB' : (atomPairG D₀ D₁ splitY splitX X Y ?' n).1 =
```

```
      (atomPairG D₀ D₁ splitY splitX X Y ? n).1 ∧
      (atomPairG D₀ D₁ splitY splitX X Y ?' n).2 =
        (atomPairG D₀ D₁ splitY splitX X Y ? n).2 :=
    ⟨(congrArg Prod.fst hpairEq).symm, (congrArg Prod.snd hpairEq).symm⟩
  by_cases h1 : (? n).1 = (?' n).1
  · have h2 : (? n).2 = (?' n).2 := fun h2eq => h?n (Prod.ext_iff.mpr ⟨h1, h2eq⟩)
    rw [atomPairG.succ_eq, atomPairG.succ_eq, hAB'.1, hAB'.2, h1]
    obtain ⟨hspecAB, hspecAmem⟩ := xStepG.spec D₀ D₁ hD₀pos hD₀diff splitY hySplit
hD₁pos
      hD₁diff splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne ? n
    rw [h1] at hspecAB hspecAmem
    exact yStepG.disjoint_of_ne hySplit hspecAB hspecAmem (Y n) h2
  · obtain ⟨ihAB, ihA, ihB⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY
hySplit hD₁pos
      hD₁diff splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne ? n
    have hxdisj := xStepG.disjoint_of_ne hxSplit ihAB ihB (X n) h1
    obtain ⟨hspecAB, hspecAmem⟩ := xStepG.spec D₀ D₁ hD₀pos hD₀diff splitY hySplit
hD₁pos
      hD₁diff splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne ? n
    obtain ⟨hspecAB', hspecAmem'⟩ := xStepG.spec D₀ D₁ hD₀pos hD₀diff splitY hySplit
 hD₁pos
      hD₁diff splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne ?' n
    have h1sub : (atomPairG D₀ D₁ splitY splitX X Y ? (n + 1)).1 ⊆
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) (? n).1).1 := by
      rw [atomPairG.succ_eq]; exact yStepG.fst_subset hySplit hspecAB hspecAmem (Y
 n) (? n).2
    have h2sub : (atomPairG D₀ D₁ splitY splitX X Y ? (n + 1)).2 ⊆
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ? n).1
          (atomPairG D₀ D₁ splitY splitX X Y ? n).2 (X n) (? n).1).2 := by
      rw [atomPairG.succ_eq]; exact yStepG.snd_subset splitY _ _ (Y n) (? n).2
    have h1sub' : (atomPairG D₀ D₁ splitY splitX X Y ?' (n + 1)).1 ⊆
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ?' n).1
          (atomPairG D₀ D₁ splitY splitX X Y ?' n).2 (X n) (?' n).1).1 := by
      rw [atomPairG.succ_eq]; exact yStepG.fst_subset hySplit hspecAB' hspecAmem'
(Y n) (?' n).2
    have h2sub' : (atomPairG D₀ D₁ splitY splitX X Y ?' (n + 1)).2 ⊆
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX X Y ?' n).1
          (atomPairG D₀ D₁ splitY splitX X Y ?' n).2 (X n) (?' n).1).2 := by
      rw [atomPairG.succ_eq]; exact yStepG.snd_subset splitY _ _ (Y n) (?' n).2
    rw [hAB'.1, hAB'.2] at h1sub' h2sub'
    exact ⟨Set.subset_eq_empty (Set.inter_subset_inter h1sub h1sub') hxdisj.1,
      Set.subset_eq_empty (Set.inter_subset_inter h2sub h2sub') hxdisj.2⟩
· push Not at hagree
  obtain ⟨j, hj, hjne⟩ := hagree
  obtain ⟨hd1, hd2⟩ := ih ⟨j, hj, hjne⟩
  have h1 : (atomPairG D₀ D₁ splitY splitX X Y ? (n + 1)).1 ⊆
      (atomPairG D₀ D₁ splitY splitX X Y ? n).1 := atomPairG.fst_subset D₀ D₁ hD₀pos
 hD₀diff
    splitY hySplit hD₁pos hD₁diff splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne ? n
  have h1' : (atomPairG D₀ D₁ splitY splitX X Y ?' (n + 1)).1 ⊆
      (atomPairG D₀ D₁ splitY splitX X Y ?' n).1 := atomPairG.fst_subset D₀ D₁ hD₀
pos hD₀diff
    splitY hySplit hD₁pos hD₁diff splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne ?' n
  have h2 : (atomPairG D₀ D₁ splitY splitX X Y ? (n + 1)).2 ⊆
      (atomPairG D₀ D₁ splitY splitX X Y ? n).2 := atomPairG.snd_subset D₀ D₁ hD₀pos
```

```
     hD₀diff
        splitY hySplit hD₁pos hD₁diff splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne ? n
      have h2' : (atomPairG D₀ D₁ splitY splitX X Y ?' (n + 1)).2 ⊆
          (atomPairG D₀ D₁ splitY splitX X Y ?' n).2 := atomPairG.snd_subset D₀ D₁ hD₀
    pos hD₀diff
        splitY hySplit hD₁pos hD₁diff splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne ?' n
      exact ⟨Set.subset_eq_empty (Set.inter_subset_inter h1 h1') hd1,
        Set.subset_eq_empty (Set.inter_subset_inter h2 h2') hd2⟩

end AtomPairGen

section AtomPairGen

variable {α β : Type*} (D₀ : NeighborhoodSystem α) (D₁ : NeighborhoodSystem β)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hySplit : SplitSpec' D₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hxSplit : SplitSpec' D₁ splitX)
  (X : ℕ → Set α) (Y : ℕ → Set β) (hXmem : ∀ n, D₀.mem (X n)) (hYmem : ∀ n, D₁.mem (Y
    n))

variable (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hySplit hD₁pos hD₁diff hxSplit hXmem hYmem hD₀mne hD₁mne

theorem snd_subset_master (? : ℕ → Bool × Bool) (n : ℕ) :
    (atomPairG D₀ D₁ splitY splitX X Y ? n).2 ⊆ D₁.master := by
  induction n with
  | zero => exact subset_rfl
  | succ n ih => exact (atomPairG.snd_subset D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos
    hD₁diff
      splitX hxSplit X Y hXmem hYmem hD₀mne hD₁mne ? n).trans ih

end AtomPairGen

end atomPairG

namespace atomPairG
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hD₀nomin : D₀.NoMinimal) (hD₁nomin : D₁.NoMinimal)

include hD₀pos hD₀diff hxSplit hD₁pos hD₁diff hySplit hD₀mne hD₁mne hD₀nomin in
```

```
theorem exists_deltaPair_inter_Xn_ne_empty (n : ℕ) :
    ∃ i < 4 ^ n, (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1 ∩ P₀.X n =
    ∅ := by
  obtain ⟨z, hz⟩ := Set.nonempty_iff_ne_empty.mpr (hD₀nomin.mem_ne_empty (P₀.mem_X n))
  have hzmaster : z ∈ D₀.master := D₀.sub_master (P₀.mem_X n) hz
  obtain ⟨i, hi, hzcover⟩ := master_covered_deltaPair D₀ D₁ hD₀pos hD₀diff splitY
    hySplit
    hD₁pos hD₁diff splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne n z hzmaster
  exact ⟨i, hi, Set.nonempty_iff_ne_empty.mp ⟨z, hzcover, hz⟩⟩

include hD₀pos hD₀diff hxSplit hD₁pos hD₁diff hySplit hD₀mne hD₁mne hD₁nomin in

theorem exists_deltaPair_inter_Yn_ne_empty (n : ℕ) :
    ∃ i < 4 ^ n, (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 ∩ P₁.X n =
    ∅ := by
  obtain ⟨z, hz⟩ := Set.nonempty_iff_ne_empty.mpr (hD₁nomin.mem_ne_empty (P₁.mem_X n))
  have hzmaster : z ∈ D₁.master := D₁.sub_master (P₁.mem_X n) hz
  obtain ⟨i, hi, hzcover⟩ := master_covered_deltaPair_snd D₀ D₁ hD₀pos hD₀diff splitY
    hySplit hD₁pos hD₁diff splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne n z
    hzmaster
  exact ⟨i, hi, Set.nonempty_iff_ne_empty.mp ⟨z, hzcover, hz⟩⟩

end

end atomPairG

end DomainTheory.NeighbourhoodSystems
```

DprimeUPresentation.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomUCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.DAtom
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_6
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)

def posnegList (? : ℕ → Bool) : ℕ → List ℕ × List ℕ
  | 0 => ([], [])
  | n + 1 =>
      let pn := posnegList ? n
      if ? n then (pn.1 ++ [n], pn.2) else (pn.1, pn.2 ++ [n])

noncomputable abbrev e : ℕ → Set α := (P0 P).X
```

```
@[simp] theorem posnegList_zero (? : ℕ → Bool) : posnegList ? 0 = ([], []) := rfl

theorem posnegList_succ_true {? : ℕ → Bool} {n : ℕ} (h : ? n = true) :
    posnegList ? (n + 1) = ((posnegList ? n).1 ++ [n], (posnegList ? n).2) := by
  show (if ? n then _ else _) = _
  simp [h]

theorem posnegList_succ_false {? : ℕ → Bool} {n : ℕ} (h : ? n = false) :
    posnegList ? (n + 1) = ((posnegList ? n).1, (posnegList ? n).2 ++ [n]) := by
  show (if ? n then _ else _) = _
  simp [h]

theorem IPos_append {E : NeighborhoodSystem α} (Q : ComputablePresentation E) (l1 l2 :
     List ℕ) :
    IPos Q (l1 ++ l2) = IPos Q l1 ∩ IPos Q l2 := by
  induction l1 with
  | nil => simp [IPos_nil]
  | cons a l ih => rw [List.cons_append, IPos_cons, IPos_cons, ih, Set.inter_assoc]

theorem negPart_append {E : NeighborhoodSystem α} (Q : ComputablePresentation E)
    (n1 n2 : List ℕ) :
    {m : ℕ | ∀ j ∈ (n1 ++ n2), m ∈ idxSet Q.X j} =
      {m | ∀ j ∈ n1, m ∈ idxSet Q.X j} ∩ {m | ∀ j ∈ n2, m ∈ idxSet Q.X j} := by
  ext m
  simp only [Set.mem_ofPred_eq, List.forall_mem_append, Set.mem_inter_iff]

theorem genAtom_eq_DAtom (? : ℕ → Bool) :
    ∀ n, genAtom (idxSet (e P)) Set.univ ? n =
      DAtom (P0 P) (posnegList ? n).1 (posnegList ? n).2 := by
  intro n
  induction n with
  | zero => simp [genAtom, DAtom, IPos_nil]
  | succ n ih =>
    rcases Bool.eq_false_or_eq_true (? n) with h | h
    · have hstep : genAtom (idxSet (e P)) Set.univ ? (n + 1) =
          genAtom (idxSet (e P)) Set.univ ? n ∩ idxSet (e P) n := by
        show genAtom (idxSet (e P)) Set.univ ? n ∩
          (if ? n then idxSet (e P) n else Set.univ \ idxSet (e P) n) = _
        simp [h]
      rw [hstep, posnegList_succ_true h, ih]
      unfold DAtom
      rw [IPos_append]
      have hI : IPos (P0 P) [n] = idxSet (e P) n := by
        rw [IPos_cons, IPos_nil, Set.inter_univ]
      rw [hI]
      show IPos (P0 P) (posnegList ? n).1 ∩ {m | ∀ j ∈ (posnegList ? n).2, m ∈ idxSet
    (e P) j}
          ∩ idxSet (e P) n = _
      ac_rfl
    · have hstep : genAtom (idxSet (e P)) Set.univ ? (n + 1) =
          genAtom (idxSet (e P)) Set.univ ? n ∩ (Set.univ \ idxSet (e P) n) := by
        show genAtom (idxSet (e P)) Set.univ ? n ∩
          (if ? n then idxSet (e P) n else Set.univ \ idxSet (e P) n) = _
        simp [h]
      rw [hstep, posnegList_succ_false h, ih]
      unfold DAtom
```

```
      rw [negPart_append]
      have hZ : {m : ℕ | m ∈ idxSet (e P) n} = Set.univ \ idxSet (e P) n := by
        ext m; simp [Set.mem_sdiff]
      have hn : {m : ℕ | ∀ j ∈ [n], m ∈ idxSet (e P) j} = {m : ℕ | m ∈ idxSet (e P) n}
     := by
        ext m; simp
      rw [hn, hZ]
      show IPos (P0 P) (posnegList ? n).1 ∩ {m | ∀ j ∈ (posnegList ? n).2, m ∈ idxSet
    (e P) j}
          ∩ (Set.univ \ idxSet (e P) n) = _
      ac_rfl

theorem eIdx_zero : eIdx P 0 = P.masterIdx := ite_eq_left rfl

theorem genAtom_empty_iff (? : ℕ → Bool) (n : ℕ) :
    genAtom (idxSet (e P)) Set.univ ? n = ∅ ↔
      DAtom (P0 P) (posnegList ? n).1 (posnegList ? n).2 = ∅ := by
  rw [genAtom_eq_DAtom]

theorem hcover : ∀ S, D.mem S ↔ ∃ n, S = e P n := by
  intro S
  constructor
  · intro hS
    obtain ⟨n, hn⟩ := P.surj hS
    exact ⟨eIdx P n, by show S = P.X (eIdx P (eIdx P n)); rw [eIdx_involutive P n];
    exact hn.symm⟩
  · rintro ⟨n, rfl⟩
    exact (P0 P).mem_X n

theorem he0 : e P 0 = D.master := by
  show P.X (eIdx P 0) = D.master
  rw [eIdx_zero]; exact P.masterIdx_spec

theorem DprimeU_cons_computable :
    RecDecidable₂ (fun i j => ∃ k, Yidx (e P) k ⊆ Yidx (e P) i ∩ Yidx (e P) j) := by
  refine RecDecidable.of_iff (fun t => ?_) (P0 P).cons_computable
  simp only [Set.subset_inter_iff]
  exact exists_congr (fun k => by
    rw [← embed_subset_iff (e P) k t.unpair.1, ← embed_subset_iff (e P) k t.unpair
    .2])

theorem DprimeU_inter_spec {n m : ℕ}
    (h : ∃ k, Yidx (e P) k ⊆ Yidx (e P) n ∩ Yidx (e P) m) :
    Yidx (e P) ((P0 P).inter n m) = Yidx (e P) n ∩ Yidx (e P) m := by
  have h' : ∃ k, (P0 P).X k ⊆ (P0 P).X n ∩ (P0 P).X m := by
    obtain ⟨k, hk⟩ := h
    rw [Set.subset_inter_iff] at hk
    exact ⟨k, Set.subset_inter ((embed_subset_iff (e P) k n).mpr hk.1)
      ((embed_subset_iff (e P) k m).mpr hk.2)⟩
  have heP : (P0 P).X ((P0 P).inter n m) = (P0 P).X n ∩ (P0 P).X m := (P0 P).
   inter_spec h'
  have hidx : idxSet (e P) n ∩ idxSet (e P) m = idxSet (e P) ((P0 P).inter n m) :=
    idxSet_inter_of_inter_eq (e P) heP.symm
  exact ((transfer_inter_eq_iff splitChoice (idxSet (e P)) Set.univ univ_nonempty_nat
    splitChoice_isSplitSpec n m ((P0 P).inter n m)
    (Set.subset_univ _) (Set.subset_univ _) (Set.subset_univ _)).mp hidx).symm
```

```
def capNegCode (t : ℕ) : ℕ := encodeList [t.unpair.2.unpair.2]

theorem capNegCode_eq (a : ℕ) : encodeList [a] = Nat.pair a 0 + 1 := rfl

def capPosCode (t : ℕ) : ℕ := encodeList [t.unpair.1, t.unpair.2.unpair.1]

theorem capPosCode_eq (a b : ℕ) : encodeList [a, b] = Nat.pair a (Nat.pair b 0 + 1) +
    1 :=
  rfl

theorem idxSet_inter_eq_iff_DAtom {β : Type*} {V : NeighborhoodSystem β}
    (Q : ComputablePresentation V) (i j k : ℕ) :
    idxSet Q.X i ∩ idxSet Q.X j = idxSet Q.X k ↔
      Q.X k ⊆ Q.X i ∧ Q.X k ⊆ Q.X j ∧ DAtom Q [i, j] [k] = ∅ := by
  have hDAtom_iff : DAtom Q [i, j] [k] = ∅ ↔ idxSet Q.X i ∩ idxSet Q.X j ⊆ idxSet Q.X
     k := by
    have hIPos : IPos Q [i, j] = idxSet Q.X i ∩ idxSet Q.X j := by
      rw [IPos_cons, IPos_cons, IPos_nil, Set.inter_univ]
    have hDAtom_eq : DAtom Q [i, j] [k] = (idxSet Q.X i ∩ idxSet Q.X j) \ idxSet Q.X k
     := by
      show IPos Q [i, j] ∩ {m | ∀ j' ∈ ([k] : List ℕ), m ∈ idxSet Q.X j'} = _
      rw [hIPos]
      ext m
      simp [Set.mem_sdiff]
    rw [hDAtom_eq, Set.sdiff_eq_empty]
  constructor
  · intro heq
    have h1 : idxSet Q.X k ⊆ idxSet Q.X i := by rw [← heq]; exact Set.
    inter_subset_left
    have h2 : idxSet Q.X k ⊆ idxSet Q.X j := by rw [← heq]; exact Set.
    inter_subset_right
    exact ⟨(idxSet_subset_iff Q.X k i).mp h1, (idxSet_subset_iff Q.X k j).mp h2,
      hDAtom_iff.mpr heq.subset⟩
  · rintro ⟨hki, hkj, hempty⟩
    exact Set.Subset.antisymm (hDAtom_iff.mp hempty)
      (Set.subset_inter ((idxSet_subset_iff Q.X k i).mpr hki) ((idxSet_subset_iff Q.X
    k j).mpr hkj))

theorem inclK_i_recDecidable :
    RecDecidable₃ (fun i _ k => (P0 P).X k ⊆ (P0 P).X i) := by
  have hg : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.2.unpair.2 t.unpair.1) :=
    Nat.Primrec.pair (Nat.Primrec.right.comp Nat.Primrec.right) Nat.Primrec.left
  have hp := (P0 P).incl_computable.comp hg
  refine RecDecidable.of_iff (fun t => ?_) hp
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem inclK_j_recDecidable :
    RecDecidable₃ (fun _ j k => (P0 P).X k ⊆ (P0 P).X j) := by
  have hg : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.2.unpair.2 t.unpair.2.unpair
    .1) :=
    Nat.Primrec.pair (Nat.Primrec.right.comp Nat.Primrec.right)
      (Nat.Primrec.left.comp Nat.Primrec.right)
  have hp := (P0 P).incl_computable.comp hg
  refine RecDecidable.of_iff (fun t => ?_) hp
  simp only [unpair_pair_fst, unpair_pair_snd]
```

```
theorem primrec_capNegCode : Nat.Primrec capNegCode := by
  have hinner : Nat.Primrec (fun t : ℕ => Nat.pair (t.unpair.2.unpair.2) 0) :=
    Nat.Primrec.pair (Nat.Primrec.right.comp Nat.Primrec.right) (Nat.Primrec.const 0)
  refine (primrec_add₂ hinner (Nat.Primrec.const 1)).of_eq (fun t => ?_)
  show _ = capNegCode t
  rw [capNegCode, capNegCode_eq]

theorem primrec_capPosCode : Nat.Primrec capPosCode := by
  have h2 : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1) := Nat.Primrec.left.comp
    Nat.Primrec.right
  have hinner : Nat.Primrec (fun t : ℕ => Nat.pair (t.unpair.2.unpair.1) 0 + 1) :=
    primrec_add₂ (Nat.Primrec.pair h2 (Nat.Primrec.const 0)) (Nat.Primrec.const 1)
  have houter : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.1 (Nat.pair t.unpair.2.
    unpair.1 0 + 1)) :=
    Nat.Primrec.pair Nat.Primrec.left hinner
  refine (primrec_add₂ houter (Nat.Primrec.const 1)).of_eq (fun t => ?_)
  show _ = capPosCode t
  rw [capPosCode, capPosCode_eq]

theorem DAtom_pair_recDecidable :
    RecDecidable₃ (fun i j k => DAtom (P0 P) [i, j] [k] = ∅) := by
  have hg : Nat.Primrec (fun t : ℕ => Nat.pair (capPosCode t) (capNegCode t)) :=
    primrec_capPosCode.pair primrec_capNegCode
  have hp := (DAtom_recDecidable (P0 P)).comp hg
  refine RecDecidable.of_iff (fun t => ?_) hp
  simp only [unpair_pair_fst, unpair_pair_snd, capPosCode, capNegCode,
    decodeList_encodeList]

theorem DprimeU_interEq_computable :
    RecDecidable₃ (fun i j k => Yidx (e P) i ∩ Yidx (e P) j = Yidx (e P) k) := by
  have hcomb : RecDecidable₃ (fun i j k =>
      ((P0 P).X k ⊆ (P0 P).X i ∧ (P0 P).X k ⊆ (P0 P).X j) ∧ DAtom (P0 P) [i, j] [k] =
    ∅) :=
    (inclK_i_recDecidable P |>.and (inclK_j_recDecidable P)).and (
    DAtom_pair_recDecidable P)
  refine RecDecidable.of_iff (fun t => ?_) hcomb
  dsimp only
  rw [← transfer_inter_eq_iff splitChoice (idxSet (e P)) Set.univ univ_nonempty_nat
      splitChoice_isSplitSpec t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair.2
      (Set.subset_univ _) (Set.subset_univ _) (Set.subset_univ _),
    idxSet_inter_eq_iff_DAtom (P0 P) t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair
    .2]
  tauto

noncomputable def DprimeUPresentation :
    ComputablePresentation (DprimeU D (e P) (hcover P) (he0 P)) where
  X n := Yidx (e P) n
  mem_X n := ⟨n, rfl⟩
  surj := fun hY => hY.imp (fun _ h => h.symm)
  interEq_computable := DprimeU_interEq_computable P
  cons_computable := DprimeU_cons_computable P
  inter n m := (P0 P).inter n m
  inter_primrec := (P0 P).inter_primrec
  inter_spec h := DprimeU_inter_spec P h
  masterIdx := 0
```

```
  masterIdx_spec := Yidx_zero D (e P) (hcover P) (he0 P)

theorem DprimeU_isEffectivelyGiven :
    (DprimeU D (e P) (hcover P) (he0 P)).IsEffectivelyGiven :=
  ⟨DprimeUPresentation P⟩

end

end DomainTheory.NeighbourhoodSystems
```

atomUCode_more.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomUCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    DprimeUPresentation
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.DAtom
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.UX
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    QPairCodes
public import Mathlib.Data.Nat.Bitwise

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive
open AtomCode

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)
variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)

theorem genAtom_atomUCode (k : ℕ) :
    ∀ n, genAtom (idxSet (e P)) Set.univ (deltaOf k) n
      = DAtom (P0 P) (decodeList (atomUPos P n k)) (decodeList (atomUNeg P n k)) := by
  intro n
  induction n with
  | zero =>
    simp [genAtom, atomUPos, atomUNeg, atomUCodeState, atomBase, DAtom,
    decodeList_zero, IPos_nil]
  | succ n ih =>
    rcases Bool.eq_false_or_eq_true (deltaOf k n) with h? | h?
    · have hbit1 : (k / 2 ^ n) % 2 = 1 := (deltaOf_eq_true_iff k n).mp h?
      have hstep : genAtom (idxSet (e P)) Set.univ (deltaOf k) (n + 1) =
          genAtom (idxSet (e P)) Set.univ (deltaOf k) n ∩ idxSet (e P) n := by
        show genAtom (idxSet (e P)) Set.univ (deltaOf k) n ∩
          (if deltaOf k n then idxSet (e P) n else Set.univ \ idxSet (e P) n) = _
        simp [h?]
      rw [hstep, ih, atomUPos_succ, atomUNeg_succ, hbit1, selectFn_one, selectFn_one,
        decodeList_succ, unpair_pair_fst, unpair_pair_snd, DAtom_cons_pos, Set.
    inter_comm]
    · have hbit0 : (k / 2 ^ n) % 2 = 0 := by
```

```
        rcases Nat.eq_zero_or_pos ((k / 2 ^ n) % 2) with h | h
        · exact h
        · exact absurd ((deltaOf_eq_true_iff k n).mpr (by omega)) (by simp [h?])
      have hstep : genAtom (idxSet (e P)) Set.univ (deltaOf k) (n + 1) =
          genAtom (idxSet (e P)) Set.univ (deltaOf k) n ∩ (Set.univ \ idxSet (e P) n)
    := by
        show genAtom (idxSet (e P)) Set.univ (deltaOf k) n ∩
          (if deltaOf k n then idxSet (e P) n else Set.univ \ idxSet (e P) n) = _
        simp [h?]
      rw [hstep, ih, atomUPos_succ, atomUNeg_succ, hbit0, selectFn_zero, selectFn_zero
    ,
        decodeList_succ, unpair_pair_fst, unpair_pair_snd, DAtom_cons_neg, Set.
    inter_comm]

theorem atomUEmpty_eq_one_iff_genAtom (n k : ℕ) :
    atomUEmpty P n k = 1 ↔ genAtom (idxSet (e P)) Set.univ (deltaOf k) n = ∅ := by
  rw [atomUEmpty_eq_one_iff, ← genAtom_atomUCode]

theorem atomUEmpty_eq_zero_iff_genAtom (n k : ℕ) :
    atomUEmpty P n k = 0 ↔ genAtom (idxSet (e P)) Set.univ (deltaOf k) n = ∅ := by
  have hle : atomUEmpty P n k ≤ 1 := datomDec_le_one P _
  have h1 := atomUEmpty_eq_one_iff_genAtom P n k
  constructor
  · intro h0 hempty; exact absurd (h1.mpr hempty) (by omega)
  · intro hne; by_contra h0; exact hne (h1.mp (by omega))

theorem genAtom_succ_subset (k n : ℕ) :
    genAtom (idxSet (e P)) Set.univ (deltaOf k) (n + 1) ⊆
      genAtom (idxSet (e P)) Set.univ (deltaOf k) n :=
  Set.inter_subset_left

theorem atomUEmpty_mono {n k : ℕ} (h : atomUEmpty P n k = 1) : atomUEmpty P (n + 1) k
    = 1 := by
  rw [atomUEmpty_eq_one_iff_genAtom] at h ⊢
  exact Set.subset_eq_empty (genAtom_succ_subset P k n) h

theorem atomUEmpty_zero_of_succ {n k : ℕ} (h : atomUEmpty P (n + 1) k = 0) :
    atomUEmpty P n k = 0 := by
  by_contra hne
  have hle := datomDec_le_one P (Nat.pair (atomUPos P n k) (atomUNeg P n k))
  have h1 : atomUEmpty P n k = 1 := by unfold atomUEmpty at hne hle ⊢; omega
  exact absurd (atomUEmpty_mono P h1) (by omega)

theorem atomUCode_disjoint :
    ∀ n k k', atomUEmpty P n k = 0 → atomUEmpty P n k' = 0 → (∃ i < n, deltaOf k i =
    deltaOf k' i) →
      UX (atomUCode P n k) ∩ UX (atomUCode P n k') = ∅ := by
  intro n
  induction n with
  | zero => intro k k' _ _ ⟨i, hi, _⟩; exact absurd hi (Nat.not_lt_zero i)
  | succ n ih =>
    intro k k' hk hk' ⟨i, hi, hne⟩
    by_cases hagree : ∀ j < n, deltaOf k j = deltaOf k' j
    · have h?n : deltaOf k n = deltaOf k' n := by
        intro heq
        apply hne
```

```
      rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
      · exact hagree i hi'
      · exact heq
    obtain ⟨hpos, hneg, hcode⟩ := atomUCodeState_congr P hagree
    rw [atomUCode.succ, atomUCode.succ, hpos, hneg, hcode]

    rcases Bool.eq_false_or_eq_true (deltaOf k n) with h1 | h1
    ·
      have hbitk : (k / 2 ^ n) % 2 = 1 := (deltaOf_eq_true_iff k n).mp h1
      have h2 : deltaOf k' n = false := by
        rcases Bool.eq_false_or_eq_true (deltaOf k' n) with h2 | h2
        · exact absurd (h1.trans h2.symm) h?n
        · exact h2
      have hbitk' : (k' / 2 ^ n) % 2 = 0 := by
        rcases Nat.mod_two_eq_zero_or_one (k' / 2 ^ n) with hh | hh
        · exact hh
        · exact absurd ((deltaOf_eq_true_iff k' n).mpr hh) (by simp [h2])
      have hkI : datomDec P (Nat.pair (Nat.pair n (atomUPos P n k) + 1) (atomUNeg P
  n k)) = 0 := by
        have h := hk; rw [atomUEmpty_succ, hbitk, selectFn_one] at h; exact h
      have hk'J : datomDec P (Nat.pair (atomUPos P n k') (Nat.pair n (atomUNeg P n k
  ') + 1)) = 0 := by
        have h := hk'; rw [atomUEmpty_succ, hbitk', selectFn_zero] at h; exact h
      rw [hpos, hneg] at hkI
      simp only [hbitk, hbitk', selectFn_zero, selectFn_one, hkI, hk'J]
      exact splitU_disjoint (atomUCode P n k')
    ·
      have hbitk : (k / 2 ^ n) % 2 = 0 := by
        rcases Nat.mod_two_eq_zero_or_one (k / 2 ^ n) with hh | hh
        · exact hh
        · exact absurd ((deltaOf_eq_true_iff k n).mpr hh) (by simp [h1])
      have h2 : deltaOf k' n = true := by
        rcases Bool.eq_false_or_eq_true (deltaOf k' n) with h2 | h2
        · exact h2
        · exact absurd (h1.trans h2.symm) h?n
      have hbitk' : (k' / 2 ^ n) % 2 = 1 := (deltaOf_eq_true_iff k' n).mp h2
      have hkJ : datomDec P (Nat.pair (atomUPos P n k) (Nat.pair n (atomUNeg P n k)
  + 1)) = 0 := by
        have h := hk; rw [atomUEmpty_succ, hbitk, selectFn_zero] at h; exact h
      have hk'I : datomDec P (Nat.pair (Nat.pair n (atomUPos P n k') + 1) (atomUNeg
  P n k')) = 0 := by
        have h := hk'; rw [atomUEmpty_succ, hbitk', selectFn_one] at h; exact h
      rw [hpos, hneg] at hkJ
      simp only [hbitk, hbitk', selectFn_zero, selectFn_one, hkJ, hk'I]
      exact (Set.inter_comm _ _).trans (splitU_disjoint (atomUCode P n k'))
  · push Not at hagree
    obtain ⟨j, hj, hjne⟩ := hagree
    have hd : UX (atomUCode P n k) ∩ UX (atomUCode P n k') = ∅ :=
      ih k k' (atomUEmpty_zero_of_succ P hk) (atomUEmpty_zero_of_succ P hk') ⟨j, hj,
  hjne⟩
    exact Set.subset_eq_empty
      (Set.inter_subset_inter (atomUCode.subset P hk) (atomUCode.subset P hk')) hd

theorem exists_atomUEmpty_zero (n : ℕ) : ∃ i < 2 ^ n, atomUEmpty P (n + 1) (i + 2 ^ n)
   = 0 := by
  classical
```

```
  set ?0 : ℕ → Bool := fun j => decide (n ∈ idxSet (e P) j) with h?0def
  have h?0n : ?0 n = true := by
    show decide (n ∈ idxSet (e P) n) = true
    rw [decide_eq_true_iff]; exact self_mem_idxSet (e P) n
  have hstep : genAtom (idxSet (e P)) Set.univ ?0 (n + 1) =
      genAtom (idxSet (e P)) Set.univ ?0 n ∩ idxSet (e P) n := by
    show genAtom (idxSet (e P)) Set.univ ?0 n ∩
      (if ?0 n then idxSet (e P) n else Set.univ \ idxSet (e P) n) = _
    simp [h?0n]
  have hxn : n ∈ genAtom (idxSet (e P)) Set.univ ?0 n :=
    genAtom_self (idxSet (e P)) Set.univ (Set.mem_univ n) n
  have hmem : n ∈ genAtom (idxSet (e P)) Set.univ ?0 n ∩ idxSet (e P) n :=
    ⟨hxn, self_mem_idxSet (e P) n⟩
  have hAne : genAtom (idxSet (e P)) Set.univ ?0 (n + 1) = ∅ := by
    rw [hstep]; exact Set.Nonempty.ne_empty ⟨n, hmem⟩
  set m0 := encodeBits ?0 n with hm0def
  have hm0lt : m0 < 2 ^ n := encodeBits_lt ?0 n
  refine ⟨m0, hm0lt, ?_⟩
  rw [atomUEmpty_eq_zero_iff_genAtom]
  have hagree : ∀ j < n + 1, deltaOf (m0 + 2 ^ n) j = ?0 j := by
    intro j hj
    rcases Nat.lt_succ_iff_lt_or_eq.mp hj with hj' | rfl
    · rw [deltaOf_add_two_pow_of_lt _ hj']; exact deltaOf_encodeBits ?0 n j hj'
    · rw [deltaOf_two_pow_add_self hm0lt, h?0n]
  rw [genAtom_congr (idxSet (e P)) Set.univ hagree]
  exact hAne

theorem DAtom_union (i : ℕ) (pos neg : List ℕ) :
    DAtom (P0 P) pos neg = DAtom (P0 P) (i :: pos) neg ∪ DAtom (P0 P) pos (i :: neg)
    := by
  ext m
  simp only [mem_DAtom, Set.mem_union, List.mem_cons, forall_eq_or_imp]
  by_cases hm : (P0 P).X m ⊆ (P0 P).X i <;> tauto

end

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)
variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)

theorem datomDec_eq_zero (posC negC : ℕ) (h : DAtom (P0 P) (decodeList posC) (
    decodeList negC) = ∅) :
    datomDec P (Nat.pair posC negC) = 0 := by
  have hle := datomDec_le_one P (Nat.pair posC negC)
  have hne : datomDec P (Nat.pair posC negC) = 1 := fun he => h ((datomDec_spec P posC
     negC).mp he)
  omega

theorem deltaOf_mod_two_pow_of_lt {k n i : ℕ} (hi : i < n) :
    deltaOf (k % 2 ^ n) i = deltaOf k i := by
  rw [deltaOf_eq_testBit, deltaOf_eq_testBit, Nat.testBit_mod_two_pow]
  simp [hi]

theorem atomUCodeState_congr_twin (n k : ℕ) :
    atomUPos P n (k % 2 ^ n + 2 ^ n) = atomUPos P n k ∧
```

```
      atomUNeg P n (k % 2 ^ n + 2 ^ n) = atomUNeg P n k ∧
      atomUCode P n (k % 2 ^ n + 2 ^ n) = atomUCode P n k := by
  have hagree : ∀ i < n, deltaOf (k % 2 ^ n + 2 ^ n) i = deltaOf k i := by
    intro i hi
    rw [deltaOf_add_two_pow_of_lt _ hi, deltaOf_mod_two_pow_of_lt hi]
  exact atomUCodeState_congr P hagree

theorem eq_of_deltaOf_agree_of_lt_two_pow {n i j : ℕ} (hi : i < 2 ^ n) (hj : j < 2 ^ n
    )
    (hagree : ∀ l < n, deltaOf i l = deltaOf j l) : i = j := by
  apply Nat.eq_of_testBit_eq
  intro l
  rw [← deltaOf_eq_testBit, ← deltaOf_eq_testBit]
  rcases Nat.lt_or_ge l n with hl | hl
  · exact hagree l hl
  · have hile : 2 ^ n ≤ 2 ^ l := Nat.pow_le_pow_right (by norm_num) hl
    rw [deltaOf_eq_testBit, deltaOf_eq_testBit, Nat.testBit_lt_two_pow (hi.trans_le
    hile),
      Nat.testBit_lt_two_pow (hj.trans_le hile)]

end

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)
variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)

theorem primrec_datomDec : Nat.Primrec (datomDec P) :=
  (primrec_isOne.comp (DAtom_recDecidable (P0 P)).choose_spec.1).of_eq fun _ => rfl
end

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)
variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)

theorem primrec_atomUCodeState : Nat.Primrec (atomUCodeState P) :=
  (Nat.Primrec.prec primrec_atomBase (primrec_atomStep (primrec_datomDec P))).of_eq
    fun _t => rfl

theorem primrec_atomUCode : Nat.Primrec (fun t : ℕ => atomUCode P t.unpair.1 t.unpair
    .2) :=
  (primrec_stateCode.comp (primrec_atomUCodeState P |>.comp
    (Nat.Primrec.right.pair Nat.Primrec.left))).of_eq fun _ => rfl

theorem primrec_atomUNeg : Nat.Primrec (fun t : ℕ => atomUNeg P t.unpair.1 t.unpair.2)
     :=
  (primrec_stateNeg.comp (primrec_atomUCodeState P |>.comp
    (Nat.Primrec.right.pair Nat.Primrec.left))).of_eq fun _ => rfl

theorem primrec_atomUPos : Nat.Primrec (fun t : ℕ => atomUPos P t.unpair.1 t.unpair.2)
     :=
  (primrec_statePos.comp (primrec_atomUCodeState P |>.comp
    (Nat.Primrec.right.pair Nat.Primrec.left))).of_eq fun _ => rfl

theorem primrec_atomUEmpty : Nat.Primrec (fun t : ℕ => atomUEmpty P t.unpair.1 t.
```

```
    unpair.2) :=
  ((primrec_datomDec P).comp ((primrec_atomUPos P).pair (primrec_atomUNeg P))).of_eq
    fun _ => rfl

end

end DomainTheory.NeighbourhoodSystems
```

YseqCode_more.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.YseqCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomUCode_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.UX
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    QPairCodes

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive
open AtomCode

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)
variable {D : NeighborhoodSystem α} (P : ComputablePresentation D)

theorem primrec_yFoldStep : Nat.Primrec (yFoldStep P) := by
  have hn : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hacc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hi : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have h2n : Nat.Primrec (fun w : ℕ => 2 ^ w.unpair.1) := primrec_two_pow hn
  have hk : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1 + 2 ^ w.unpair.1) :=
    primrec_add₂ hi h2n
  have hn1 : Nat.Primrec (fun w : ℕ => w.unpair.1 + 1) := Nat.Primrec.succ.comp hn
  have hempty : Nat.Primrec (fun w : ℕ =>
      atomUEmpty P (w.unpair.1 + 1) (w.unpair.2.unpair.1 + 2 ^ w.unpair.1)) :=
    ((primrec_atomUEmpty P).comp (hn1.pair hk)).of_eq
      fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hcode : Nat.Primrec (fun w : ℕ =>
      atomUCode P (w.unpair.1 + 1) (w.unpair.2.unpair.1 + 2 ^ w.unpair.1)) :=
    ((primrec_atomUCode P).comp (hn1.pair hk)).of_eq
      fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hfound : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp hacc
  have hval : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp hacc
  have hunion : Nat.Primrec (fun w : ℕ => unionUX w.unpair.2.unpair.2.unpair.2
      (atomUCode P (w.unpair.1 + 1) (w.unpair.2.unpair.1 + 2 ^ w.unpair.1))) :=
```

```
    (primrec_unionUX.comp (hval.pair hcode)).of_eq
      fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hinner : Nat.Primrec (fun w : ℕ => selectFn w.unpair.2.unpair.2.unpair.1
      (Nat.pair 1 (unionUX w.unpair.2.unpair.2.unpair.2
        (atomUCode P (w.unpair.1 + 1) (w.unpair.2.unpair.1 + 2 ^ w.unpair.1))))
      (Nat.pair 1 (atomUCode P (w.unpair.1 + 1) (w.unpair.2.unpair.1 + 2 ^ w.unpair.1)
   ))) :=
    primrec_selectFn hfound
      ((Nat.Primrec.const 1).pair hunion)
      ((Nat.Primrec.const 1).pair hcode)
  exact (primrec_selectFn hempty hacc hinner).of_eq fun w => by unfold yFoldStep; simp
     only []

theorem primrec_yFold : Nat.Primrec (fun t : ℕ => yFold P t.unpair.1 t.unpair.2) :=
  (Nat.Primrec.prec (Nat.Primrec.const (Nat.pair 0 0)) (primrec_yFoldStep P)).of_eq
    fun _ => rfl

theorem primrec_YseqCode : Nat.Primrec (YseqCode P) := by
  have h2n : Nat.Primrec (fun n : ℕ => 2 ^ n) := primrec_two_pow Nat.Primrec.id
  refine (Nat.Primrec.right.comp ((primrec_yFold P).comp (Nat.Primrec.id.pair h2n))).
    of_eq
    fun n => ?_
  show ((yFold P (Nat.pair n (2 ^ n)).unpair.1 (Nat.pair n (2 ^ n)).unpair.2)).unpair
    .2 = YseqCode P n
  rw [unpair_pair_fst, unpair_pair_snd]
  rfl

theorem UX_unionUX (n m : ℕ) : UX (unionUX n m) = UX n ∪ UX m := by
  have hmem : U.mem (presentedIntervals (decodeQPairList (Domain.Recursive.appendCode
    (canonCode n) (canonCode m)))) := by
    rw [presentedIntervals_decodeQPairList_appendCode]; exact U_mem_union_UX n m
  show presentedIntervals (decodeQPairList (canonCode (unionUX n m))) = UX n ∪ UX m
  unfold unionUX
  rw [presentedIntervals_decodeQPairList_canonCode, canonList_fixed hmem,
    presentedIntervals_decodeQPairList_appendCode]
  rfl

theorem yFold_mem_iff (n : ℕ) :
    ∀ N, (yFold P n N).unpair.1 = 1 →
      ∀ z : ?, z ∈ UX (yFold P n N).unpair.2 ↔
        ∃ i < N, atomUEmpty P (n + 1) (i + 2 ^ n) = 0 ∧ z ∈ UX (atomUCode P (n + 1) (i
     + 2 ^ n)) := by
  intro N
  induction N with
  | zero => intro h; simp [yFold_zero] at h
  | succ N ih =>
    intro hfound1 z
    rw [yFold_succ, yFoldStep_eq] at hfound1 ⊢
    rcases atomUEmpty_zero_or_one P (n + 1) (N + 2 ^ n) with h0 | h1
    · rw [h0, selectFn_zero] at hfound1 ⊢
      rcases Nat.eq_zero_or_pos (yFold P n N).unpair.1 with hf0 | hfpos
      · rw [show (yFold P n N).unpair.1 = 0 from hf0, selectFn_zero, unpair_pair_snd]
        constructor
        · intro hz; exact ⟨N, Nat.lt_succ_self N, h0, hz⟩
        · rintro ⟨i, hi, hie, hz⟩
          rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
```

```
          · exact absurd ((yFold_found_iff P n N).mpr ⟨i, hi', hie⟩) (by rw [hf0]; omega
    )
          · exact hz
      · have hf1 : (yFold P n N).unpair.1 = 1 := by
          have := yFold_found_le_one P n N; omega
        rw [hf1, selectFn_one, unpair_pair_snd, UX_unionUX, Set.mem_union, ih hf1 z]
        constructor
        · rintro (⟨i, hi, hie, hz⟩ | hz)
          · exact ⟨i, Nat.lt_succ_of_lt hi, hie, hz⟩
          · exact ⟨N, Nat.lt_succ_self N, h0, hz⟩
        · rintro ⟨i, hi, hie, hz⟩
          rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
          · exact Or.inl ⟨i, hi', hie, hz⟩
          · exact Or.inr hz
    · rw [h1, selectFn_one] at hfound1 ⊢
      rw [ih hfound1 z]
      constructor
      · rintro ⟨i, hi, hie, hz⟩; exact ⟨i, Nat.lt_succ_of_lt hi, hie, hz⟩
      · rintro ⟨i, hi, hie, hz⟩
        rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
        · exact ⟨i, hi', hie, hz⟩
        · exact absurd hie (by omega)

theorem yFold_two_pow_found (n : ℕ) : (yFold P n (2 ^ n)).unpair.1 = 1 :=
  (yFold_found_iff P n (2 ^ n)).mpr (exists_atomUEmpty_zero P n)

theorem mem_UX_YseqCode_iff (n : ℕ) (z : ?) :
    z ∈ UX (YseqCode P n) ↔
      ∃ i < 2 ^ n, atomUEmpty P (n + 1) (i + 2 ^ n) = 0 ∧ z ∈ UX (atomUCode P (n + 1)
    (i + 2 ^ n)) :=
  yFold_mem_iff P n (2 ^ n) (yFold_two_pow_found P n) z

theorem atomUCode_disjoint_YseqCode_of_posTwin_empty {n k' : ℕ} (hk' : atomUEmpty P n
    k' = 0)
    (hjunk : atomUEmpty P (n + 1) (k' % 2 ^ n + 2 ^ n) = 1) :
    UX (atomUCode P n k') ∩ UX (YseqCode P n) = ∅ := by
  rw [Set.eq_empty_iff_forall_notMem]
  rintro z ⟨hzB, hzY⟩
  obtain ⟨i, hilt, hie, hz⟩ := (mem_UX_YseqCode_iff P n z).mp hzY
  set j := k' % 2 ^ n with hjdef
  have hjlt : j < 2 ^ n := Nat.mod_lt k' (Nat.two_pow_pos n)
  have hk'j : ∀ l < n, deltaOf k' l = deltaOf j l := by
    intro l hl; rw [hjdef, deltaOf_mod_two_pow_of_lt hl]
  by_cases hij : i = j
  · rw [hij] at hie; exact absurd hie (by omega)
  · have hdisagree : ∃ l < n, deltaOf (i + 2 ^ n) l = deltaOf k' l := by
      by_contra hcon
      push Not at hcon
      apply hij
      apply eq_of_deltaOf_agree_of_lt_two_pow hilt hjlt
      intro l hl
      have h1 : deltaOf (i + 2 ^ n) l = deltaOf i l := deltaOf_add_two_pow_of_lt _ hl
      have h2 := hcon l hl
      rw [h1] at h2
      exact h2.trans (hk'j l hl)
    obtain ⟨l, hl, hlne⟩ := hdisagree
```

```
    have hd : UX (atomUCode P n (i + 2 ^ n)) ∩ UX (atomUCode P n k') = ∅ :=
      atomUCode_disjoint P n (i + 2 ^ n) k' (atomUEmpty_zero_of_succ P hie) hk' ⟨l, hl,
     hlne⟩
    have hzB' : z ∈ UX (atomUCode P n (i + 2 ^ n)) := atomUCode.subset P hie hz
    have hzmem : z ∈ UX (atomUCode P n (i + 2 ^ n)) ∩ UX (atomUCode P n k') := ⟨hzB',
    hzB⟩
    rw [hd] at hzmem
    exact absurd hzmem (Set.mem_empty_iff_false z).mp

theorem atomUCode_succ_true {k n : ℕ} (hne : atomUEmpty P (n + 1) k = 0)
    (h? : deltaOf k n = true) :
    UX (atomUCode P (n + 1) k) = UX (atomUCode P n k) ∩ UX (YseqCode P n) := by
  set j := k % 2 ^ n with hjdef
  have hjlt : j < 2 ^ n := Nat.mod_lt k (Nat.two_pow_pos n)
  have hagree : ∀ i < n + 1, deltaOf k i = deltaOf (j + 2 ^ n) i := by
    intro i hi
    rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
    · rw [deltaOf_add_two_pow_of_lt _ hi', hjdef, deltaOf_mod_two_pow_of_lt hi']
    · rw [deltaOf_two_pow_add_self hjlt, h?]
  obtain ⟨hpos_eq, hneg_eq, hcode_eq⟩ := atomUCodeState_congr P hagree
  have hempty_eq : atomUEmpty P (n + 1) (j + 2 ^ n) = 0 := by
    have heq : atomUEmpty P (n + 1) (j + 2 ^ n) = atomUEmpty P (n + 1) k := by
      unfold atomUEmpty; rw [hpos_eq, hneg_eq]
    rw [heq]; exact hne
  apply Set.Subset.antisymm
  · have hsub1 : UX (atomUCode P (n + 1) k) ⊆ UX (atomUCode P n k) := atomUCode.subset
    P hne
    have hsub2 : UX (atomUCode P (n + 1) k) ⊆ UX (YseqCode P n) := by
      rw [hcode_eq]
      intro z hz
      exact (mem_UX_YseqCode_iff P n z).mpr ⟨j, hjlt, hempty_eq, hz⟩
    exact Set.subset_inter hsub1 hsub2
  · rintro z ⟨hzB, hzY⟩
    obtain ⟨i, hilt, hie, hz⟩ := (mem_UX_YseqCode_iff P n z).mp hzY
    by_cases hagree' : ∀ p < n, deltaOf (i + 2 ^ n) p = deltaOf k p
    · have hagreeFull : ∀ l < n + 1, deltaOf (i + 2 ^ n) l = deltaOf k l := by
        intro l hl
        rcases Nat.lt_succ_iff_lt_or_eq.mp hl with hl' | rfl
        · exact hagree' l hl'
        · rw [deltaOf_two_pow_add_self hilt, h?]
      have hcode_eq'' : atomUCode P (n + 1) (i + 2 ^ n) = atomUCode P (n + 1) k :=
        (atomUCodeState_congr P hagreeFull).2.2
      rw [← hcode_eq'']; exact hz
    · push Not at hagree'
      obtain ⟨l, hl, hlne⟩ := hagree'
      have hd : UX (atomUCode P n (i + 2 ^ n)) ∩ UX (atomUCode P n k) = ∅ :=
        atomUCode_disjoint P n (i + 2 ^ n) k (atomUEmpty_zero_of_succ P hie)
          (atomUEmpty_zero_of_succ P hne) ⟨l, hl, hlne⟩
      have hzB' : z ∈ UX (atomUCode P n (i + 2 ^ n)) := atomUCode.subset P hie hz
      have hzmem : z ∈ UX (atomUCode P n (i + 2 ^ n)) ∩ UX (atomUCode P n k) := ⟨hzB',
    hzB⟩
      rw [hd] at hzmem
      exact absurd hzmem (Set.mem_empty_iff_false z).mp

theorem atomUCode_inter_succ_empty_of_junk {n k : ℕ} (hn0 : atomUEmpty P n k = 0)
    (hjunk : atomUEmpty P (n + 1) k = 1) :
```

```
  UX (atomUCode P n k) ∩ (if deltaOf k n then Yc P n else U.master \ Yc P n) = ∅ :=
  by

rcases Bool.eq_false_or_eq_true (deltaOf k n) with h? | h?
·
  have hjlt0 : k % 2 ^ n < 2 ^ n := Nat.mod_lt k (Nat.two_pow_pos n)
  have hagree : ∀ l < n + 1, deltaOf (k % 2 ^ n + 2 ^ n) l = deltaOf k l := by
    intro l hl
    rcases Nat.lt_succ_iff_lt_or_eq.mp hl with hl' | rfl
    · rw [deltaOf_add_two_pow_of_lt _ hl', deltaOf_mod_two_pow_of_lt hl']
    · rw [deltaOf_two_pow_add_self hjlt0, h?]
  obtain ⟨hp, hnge, -⟩ := atomUCodeState_congr P hagree
  have htwinJunk : atomUEmpty P (n + 1) (k % 2 ^ n + 2 ^ n) = 1 := by
    unfold atomUEmpty
    rw [hp, hnge]
    exact hjunk
  rw [ite_eq_left h?]
  exact atomUCode_disjoint_YseqCode_of_posTwin_empty P hn0 htwinJunk
·

  have hbit0 : (k / 2 ^ n) % 2 = 0 := by
    rcases Nat.mod_two_eq_zero_or_one (k / 2 ^ n) with hh | hh
    · exact hh
    · exact absurd ((deltaOf_eq_true_iff k n).mpr hh) (by simp [h?])
  have hempJ : datomDec P (Nat.pair (atomUPos P n k) (Nat.pair n (atomUNeg P n k) +
  1)) = 1 := by
    have h := hjunk
    rw [atomUEmpty_succ, hbit0, selectFn_zero] at h
    exact h
  have hJempty : DAtom (P0 P) (decodeList (atomUPos P n k))
      (n :: decodeList (atomUNeg P n k)) = ∅ := by
    have h := (datomDec_spec P (atomUPos P n k) (Nat.pair n (atomUNeg P n k) + 1)).
  mp hempJ
    rwa [decodeList_succ, unpair_pair_fst, unpair_pair_snd] at h
  have hDunion := DAtom_union P n (decodeList (atomUPos P n k)) (decodeList (
  atomUNeg P n k))
  have hIeqAll : DAtom (P0 P) (decodeList (atomUPos P n k)) (decodeList (atomUNeg P
  n k)) =
      DAtom (P0 P) (n :: decodeList (atomUPos P n k)) (decodeList (atomUNeg P n k))
  := by
    rw [hDunion, hJempty, Set.union_empty]
  have hIeqAll' : DAtom (P0 P) (decodeList (atomUPos P n k)) (decodeList (atomUNeg P
   n k)) =
      DAtom (P0 P) (decodeList (Nat.pair n (atomUPos P n k) + 1)) (decodeList (
  atomUNeg P n k)) := by
    rw [decodeList_succ, unpair_pair_fst, unpair_pair_snd]; exact hIeqAll
  have hne0 : DAtom (P0 P) (decodeList (atomUPos P n k)) (decodeList (atomUNeg P n k
  )) = ∅ := by
    intro hcon
    have := (atomUEmpty_eq_one_iff P n k).mpr hcon
    omega
  have hemptyI0 : datomDec P (Nat.pair (Nat.pair n (atomUPos P n k) + 1) (atomUNeg P
   n k)) = 0 := by
    apply datomDec_eq_zero
    rw [← hIeqAll']
    exact hne0
```

```
    have hjlt : k % 2 ^ n < 2 ^ n := Nat.mod_lt k (Nat.two_pow_pos n)
    obtain ⟨htwinPos, htwinNeg, htwinCode⟩ := atomUCodeState_congr_twin P n k
    have htwinBit1 : (k % 2 ^ n + 2 ^ n) / 2 ^ n % 2 = 1 := by
      have hh := deltaOf_two_pow_add_self hjlt
      rw [deltaOf_eq_true_iff] at hh
      exact hh
    have htwinNonjunk : atomUEmpty P (n + 1) (k % 2 ^ n + 2 ^ n) = 0 := by
      rw [atomUEmpty_succ, htwinBit1, selectFn_one, htwinPos, htwinNeg]
      exact hemptyI0
    have h?twin : deltaOf (k % 2 ^ n + 2 ^ n) n = true := deltaOf_two_pow_add_self
    hjlt
    have hkey := atomUCode_succ_true P htwinNonjunk h?twin
    have htwinCodeVal : atomUCode P (n + 1) (k % 2 ^ n + 2 ^ n) = atomUCode P n k :=
    by
      rw [atomUCode.succ, htwinBit1, selectFn_one, htwinPos, htwinNeg, hemptyI0,
    selectFn_zero,
        htwinCode, hempJ, selectFn_one]
    rw [htwinCodeVal, htwinCode] at hkey
    have hsub : UX (atomUCode P n k) ⊆ Yc P n := by
      intro z hz
      have hz' : z ∈ UX (atomUCode P n k) ∩ UX (YseqCode P n) := by rw [← hkey];
    exact hz
      exact hz'.2
    rw [ite_eq_right (by simp [h?])]
    apply Set.eq_empty_iff_forall_notMem.mpr
    rintro z ⟨hz1, -, hz2⟩
    exact hz2 (hsub hz1)

theorem atomUCode_succ_false {k n : ℕ} (hne : atomUEmpty P (n + 1) k = 0)
    (h? : deltaOf k n = false) :
    UX (atomUCode P (n + 1) k) = UX (atomUCode P n k) \ UX (YseqCode P n) := by
  have hjlt : k % 2 ^ n < 2 ^ n := Nat.mod_lt k (Nat.two_pow_pos n)
  obtain ⟨htwinPos, htwinNeg, htwinCode⟩ := atomUCodeState_congr_twin P n k
  have hbit0 : (k / 2 ^ n) % 2 = 0 := by
    rcases Nat.mod_two_eq_zero_or_one (k / 2 ^ n) with hh | hh
    · exact hh
    · exact absurd ((deltaOf_eq_true_iff k n).mpr hh) (by simp [h?])
  have hempJ : datomDec P (Nat.pair (atomUPos P n k) (Nat.pair n (atomUNeg P n k) + 1)
    ) = 0 := by
    have h := hne
    rw [atomUEmpty_succ, hbit0, selectFn_zero] at h
    exact h
  have hncode : atomUCode P (n + 1) k = selectFn
      (datomDec P (Nat.pair (Nat.pair n (atomUPos P n k) + 1) (atomUNeg P n k)))
      (atomUCode P n k) (splitURight (atomUCode P n k)) := by
    rw [atomUCode.succ, hbit0, selectFn_zero, hempJ, selectFn_zero]
  have htwinBit1 : (k % 2 ^ n + 2 ^ n) / 2 ^ n % 2 = 1 := by
    have hh := deltaOf_two_pow_add_self hjlt
    rw [deltaOf_eq_true_iff] at hh
    exact hh
  have htwinEmpty : atomUEmpty P (n + 1) (k % 2 ^ n + 2 ^ n) =
      datomDec P (Nat.pair (Nat.pair n (atomUPos P n k) + 1) (atomUNeg P n k)) := by
    rw [atomUEmpty_succ, htwinBit1, selectFn_one, htwinPos, htwinNeg]
  have hIle := datomDec_le_one P (Nat.pair (Nat.pair n (atomUPos P n k) + 1) (atomUNeg
     P n k))
  rcases (by omega :
```

```
      datomDec P (Nat.pair (Nat.pair n (atomUPos P n k) + 1) (atomUNeg P n k)) = 0 ∨
      datomDec P (Nat.pair (Nat.pair n (atomUPos P n k) + 1) (atomUNeg P n k)) = 1)
    with hI | hI
  ·
    have htwinCodeVal : atomUCode P (n + 1) (k % 2 ^ n + 2 ^ n) = splitULeft (
    atomUCode P n k) := by
      rw [atomUCode.succ, htwinBit1, selectFn_one, htwinPos, htwinNeg, htwinCode, hI,
    selectFn_zero,
        hempJ, selectFn_zero]
    have htwinNonjunk : atomUEmpty P (n + 1) (k % 2 ^ n + 2 ^ n) = 0 := by rw [
    htwinEmpty, hI]
    have h?twin : deltaOf (k % 2 ^ n + 2 ^ n) n = true := deltaOf_two_pow_add_self
    hjlt
    have hkey := atomUCode_succ_true P htwinNonjunk h?twin
    rw [htwinCodeVal, htwinCode] at hkey
    have hunion := splitU_union (atomUCode P n k)
    have hdisj := splitU_disjoint (atomUCode P n k)
    have hUXeq : UX (splitURight (atomUCode P n k)) =
        UX (atomUCode P n k) \ UX (splitULeft (atomUCode P n k)) := by
      apply Set.Subset.antisymm
      · intro z hz
        refine ⟨?_, fun hzL => ?_⟩
        · rw [← hunion]; exact Set.mem_union_right _ hz
        · have hz' : z ∈ UX (splitULeft (atomUCode P n k)) ∩ UX (splitURight (atomUCode
     P n k)) :=
            ⟨hzL, hz⟩
          rw [hdisj] at hz'
          exact hz'
      · rintro z ⟨hzC, hznL⟩
        rw [← hunion] at hzC
        exact hzC.resolve_left hznL
    rw [hncode, hI, selectFn_zero, hUXeq, hkey]
    apply Set.Subset.antisymm
    · rintro z ⟨hzC, hznCY⟩
      exact ⟨hzC, fun hzY => hznCY ⟨hzC, hzY⟩⟩
    · rintro z ⟨hzC, hznY⟩
      exact ⟨hzC, fun hzY => hznY hzY.2⟩
  ·
    have htwinNonjunk : atomUEmpty P (n + 1) (k % 2 ^ n + 2 ^ n) = 1 := by rw [
    htwinEmpty, hI]
    have hk : atomUEmpty P n k = 0 := atomUEmpty_zero_of_succ P hne
    have hcdisj : UX (atomUCode P n k) ∩ UX (YseqCode P n) = ∅ :=
      atomUCode_disjoint_YseqCode_of_posTwin_empty P hk htwinNonjunk
    have hEq : UX (atomUCode P n k) = UX (atomUCode P n k) \ UX (YseqCode P n) := by
      apply Set.Subset.antisymm
      · intro z hz
        refine ⟨hz, fun hzY => ?_⟩
        have hz' : z ∈ UX (atomUCode P n k) ∩ UX (YseqCode P n) := ⟨hz, hzY⟩
        rw [hcdisj] at hz'
        exact hz'
      · exact Set.sdiff_subset
    rw [hncode, hI, selectFn_one]
    exact hEq

theorem atomUCode_eq_genAtomYseqCode (k : ℕ) :
    ∀ n, atomUEmpty P n k = 0 → UX (atomUCode P n k) = genAtom (Yc P) U.master (
```

```
    deltaOf k) n := by
  intro n
  induction n with
  | zero =>
    intro _
    rw [atomUCode.zero, UX_UmasterIdx]
    rfl
  | succ n ih =>
    intro hne
    have ihn := ih (atomUEmpty_zero_of_succ P hne)

    rcases Bool.eq_false_or_eq_true (deltaOf k n) with h? | h?
    · have hstep : genAtom (Yc P) U.master (deltaOf k) (n + 1) =
          genAtom (Yc P) U.master (deltaOf k) n ∩ Yc P n := by
        show genAtom (Yc P) U.master (deltaOf k) n ∩
          (if deltaOf k n then Yc P n else U.master \ Yc P n) = _
        simp [h?]
      rw [hstep, ← ihn, atomUCode_succ_true P hne h?]
      rfl
    · have hstep : genAtom (Yc P) U.master (deltaOf k) (n + 1) =
          genAtom (Yc P) U.master (deltaOf k) n ∩ (U.master \ Yc P n) := by
        show genAtom (Yc P) U.master (deltaOf k) n ∩
          (if deltaOf k n then Yc P n else U.master \ Yc P n) = _
        simp [h?]
      rw [hstep, ← ihn, atomUCode_succ_false P hne h?]
      have hsub : UX (atomUCode P n k) ⊆ U.master := by
        rw [ihn]; exact genAtom_subset (Yc P) U.master (deltaOf k) n
      apply Set.Subset.antisymm
      · intro z hz; exact ⟨hz.1, hsub hz.1, hz.2⟩
      · rintro z ⟨hz1, -, hz2⟩; exact ⟨hz1, hz2⟩

theorem genAtom_Yc_empty_iff (n k : ℕ) :
    genAtom (Yc P) U.master (deltaOf k) n = ∅ ↔ atomUEmpty P n k = 1 := by
  induction n with
  | zero =>
    have h0 : atomUEmpty P 0 k = 0 := by
      have hne : genAtom (idxSet (e P)) Set.univ (deltaOf k) 0 = ∅ := by
        show (Set.univ : Set ℕ) = ∅
        exact Set.univ_nonempty.ne_empty
      exact (atomUEmpty_eq_zero_iff_genAtom P 0 k).mpr hne
    constructor
    · intro h
      exact absurd h (Set.Nonempty.ne_empty U.master_mem.2.1)
    · intro h; omega
  | succ n ih =>
    have hle : atomUEmpty P (n + 1) k ≤ 1 := datomDec_le_one P _
    rcases (by omega : atomUEmpty P (n + 1) k = 0 ∨ atomUEmpty P (n + 1) k = 1) with
     h1 | h1
    · have heq' := atomUCode_eq_genAtomYseqCode P k (n + 1) h1
      constructor
      · intro hempty
        rw [← heq'] at hempty
        exact absurd hempty (U_mem_UX _).2.1.ne_empty
      · intro hcontra; omega
    · by_cases hn0 : atomUEmpty P n k = 0
      · have heq := atomUCode_eq_genAtomYseqCode P k n hn0
```

```
        have hempty : genAtom (Yc P) U.master (deltaOf k) (n + 1) = ∅ := by
          show genAtom (Yc P) U.master (deltaOf k) n ∩
            (if deltaOf k n then Yc P n else U.master \ Yc P n) = ∅
          rw [← heq]

          exact atomUCode_inter_succ_empty_of_junk P hn0 h1
        exact ⟨fun _ => h1, fun _ => hempty⟩
      · push Not at hn0
        have hle0 : atomUEmpty P n k ≤ 1 := datomDec_le_one P _
        have hn1 : atomUEmpty P n k = 1 := by omega
        have hprev : genAtom (Yc P) U.master (deltaOf k) n = ∅ := ih.mpr hn1
        have hempty : genAtom (Yc P) U.master (deltaOf k) (n + 1) = ∅ := by
          show genAtom (Yc P) U.master (deltaOf k) n ∩
            (if deltaOf k n then Yc P n else U.master \ Yc P n) = ∅
          rw [hprev, Set.empty_inter]
        exact ⟨fun _ => h1, fun _ => hempty⟩

end

end DomainTheory.NeighbourhoodSystems
```

DprimeUCode.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    YseqCode_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    DprimeUPresentation
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomUCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.UX
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_6
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import Mathlib.Data.Nat.Bitwise

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive

section
open NeighborhoodSystem Domain.Recursive
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)

theorem Yc_subset_master (n : ℕ) : Yc P n ⊆ U.master := (U_mem_UX (YseqCode P n)).2.2

theorem Yc_zero_eq_master : Yc P 0 = U.master := by
  have hidx0 : idxSet (e P) 0 = Set.univ := idxSet_zero D (e P) (hcover P) (he0 P)
  have h01 : atomUEmpty P 1 1 = 0 := by
    apply (atomUEmpty_eq_zero_iff_genAtom P 1 1).mpr
    show genAtom (idxSet (e P)) Set.univ (deltaOf 1) 0 ∩
      (if deltaOf 1 0 then idxSet (e P) 0 else Set.univ \ idxSet (e P) 0) = ∅
    have h? : deltaOf 1 0 = true := by decide
```

```
    rw [h?, ite_eq_left rfl]
    show (Set.univ : Set ℕ) ∩ idxSet (e P) 0 = ∅
    rw [Set.univ_inter, hidx0]
    exact Set.univ_nonempty.ne_empty
  have hmem : Yc P 0 = UX (atomUCode P 1 1) := by
    unfold Yc
    ext z
    rw [mem_UX_YseqCode_iff]
    constructor
    · rintro ⟨i, hilt, hie, hz⟩
      have hi0 : i = 0 := by have := hilt; omega
      rwa [hi0] at hz
    · intro hz
      exact ⟨0, by norm_num, h01, hz⟩
  rw [hmem]
  have hnn : DAtom (P0 P) [] [] = Set.univ := by unfold DAtom; simp [IPos_nil]
  have hcode : atomUCode P 1 1 = UmasterIdx := by
    have hbit : (1 / 2 ^ (0 : ℕ)) % 2 = 1 := by norm_num
    rw [atomUCode.succ, atomUPos_zero, atomUNeg_zero, hbit, selectFn_one]
    have hposEmpty : datomDec P (Nat.pair (Nat.pair 0 0 + 1) 0) = 0 := by
      apply datomDec_eq_zero
      simp only [decodeList_succ, unpair_pair_fst, unpair_pair_snd, decodeList_zero]
      show DAtom (P0 P) [0] [] = ∅
      rw [DAtom_cons_pos, hnn, Set.inter_univ, hidx0]
      exact Set.univ_nonempty.ne_empty
    rw [hposEmpty, selectFn_zero]
    have hnegEmpty : datomDec P (Nat.pair 0 (Nat.pair 0 0 + 1)) = 1 := by
      apply (datomDec_spec P _ _).mpr
      simp only [decodeList_succ, unpair_pair_fst, unpair_pair_snd, decodeList_zero]
      show DAtom (P0 P) [] [0] = ∅
      rw [DAtom_cons_neg, hnn, Set.inter_univ, hidx0, Set.sdiff_self]
    rw [hnegEmpty, selectFn_one, atomUCode.zero]
  rw [hcode, UX_UmasterIdx]

theorem hcoreIdxYc (? : ℕ → Bool) (n : ℕ) :
    genAtom (idxSet (e P)) Set.univ ? n = ∅ ↔ genAtom (Yc P) U.master ? n = ∅ := by
  set k := encodeBits ? n with hkdef
  have hagree : ∀ i < n, ? i = deltaOf k i := fun i hi => (deltaOf_encodeBits ? n i hi)
    .symm
  rw [genAtom_congr (idxSet (e P)) Set.univ hagree, genAtom_congr (Yc P) U.master
    hagree,
    ← atomUEmpty_eq_one_iff_genAtom, genAtom_Yc_empty_iff]

theorem inclK_i_recDecidable_code :
    RecDecidable₃ (fun i _ k => (P0 P).X k ⊆ (P0 P).X i) := by
  have hg : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.2.unpair.2 t.unpair.1) :=
    Nat.Primrec.pair (Nat.Primrec.right.comp Nat.Primrec.right) Nat.Primrec.left
  have hp := (P0 P).incl_computable.comp hg
  refine RecDecidable.of_iff (fun t => ?_) hp
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem inclK_j_recDecidable_code :
    RecDecidable₃ (fun _ j k => (P0 P).X k ⊆ (P0 P).X j) := by
  have hg : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.2.unpair.2 t.unpair.2.unpair
    .1) :=
    Nat.Primrec.pair (Nat.Primrec.right.comp Nat.Primrec.right)
```

```
      (Nat.Primrec.left.comp Nat.Primrec.right)
  have hp := (P0 P).incl_computable.comp hg
  refine RecDecidable.of_iff (fun t => ?_) hp
  simp only [unpair_pair_fst, unpair_pair_snd]

theorem transfer_dir_idxYc {β1 β2 : Type*} (Z1 : ℕ → Set β1) (M1 : Set β1) (Z2 : ℕ →
    Set β2)
    (M2 : Set β2) (hcore : ∀ ? n, genAtom Z1 M1 ? n = ∅ ↔ genAtom Z2 M2 ? n = ∅)
    {cs : List (ℕ × Bool)} {n : ℕ} (hn : ∀ p ∈ cs, p.1 < n)
    (hne : {x ∈ M1 | ∀ p ∈ cs, (p.2 = true ↔ x ∈ Z1 p.1)}.Nonempty) :
    {y ∈ M2 | ∀ p ∈ cs, (p.2 = true ↔ y ∈ Z2 p.1)}.Nonempty := by
  classical
  obtain ⟨x, hxM, hxcs⟩ := hne
  set ?0 : ℕ → Bool := fun k => decide (x ∈ Z1 k) with h?0def
  have hX1 : x ∈ genAtom Z1 M1 ?0 n := genAtom_self Z1 M1 hxM n
  have hne1 : (genAtom Z1 M1 ?0 n).Nonempty := ⟨x, hX1⟩
  have hne2 : (genAtom Z2 M2 ?0 n).Nonempty := by
    rw [Set.nonempty_iff_ne_empty]
    exact fun h2 => hne1.ne_empty ((hcore ?0 n).mpr h2)
  obtain ⟨y, hy⟩ := hne2
  refine ⟨y, genAtom_subset Z2 M2 ?0 n hy, fun p hp => ?_⟩
  have hforward := genAtom_forward hy p.1 (hn p hp)
  have hbeq : ?0 p.1 = p.2 := by
    show decide (x ∈ Z1 p.1) = p.2
    rw [Bool.eq_iff_iff, decide_eq_true_iff]
    exact (hxcs p hp).symm
  rwa [hbeq] at hforward

theorem transfer_empty_iff_idxYc {cs : List (ℕ × Bool)} {n : ℕ} (hn : ∀ p ∈ cs, p.1 <
    n) :
    {x ∈ (Set.univ : Set ℕ) | ∀ p ∈ cs, (p.2 = true ↔ x ∈ idxSet (e P) p.1)}.Nonempty
    ↔
      {y ∈ U.master | ∀ p ∈ cs, (p.2 = true ↔ y ∈ Yc P p.1)}.Nonempty :=
  ⟨transfer_dir_idxYc (idxSet (e P)) Set.univ (Yc P) U.master (hcoreIdxYc P) hn,
    transfer_dir_idxYc (Yc P) U.master (idxSet (e P)) Set.univ (fun ? n => (hcoreIdxYc
    P ? n).symm)
      hn⟩

theorem transfer_double_subset_iff_idxYc (i j k : ℕ) :
    (Set.univ : Set ℕ) ∩ idxSet (e P) i ∩ idxSet (e P) j ⊆ idxSet (e P) k ↔
      U.master ∩ Yc P i ∩ Yc P j ⊆ Yc P k := by
  have key := transfer_empty_iff_idxYc P (cs := [(i, true), (j, true), (k, false)])
    (n := max i (max j k) + 1)
    (by simp only [List.mem_cons, List.not_mem_nil, or_false]
        rintro p (rfl | rfl | rfl) <;>
          simp [(Nat.le_max_left j k).trans (Nat.le_max_right i (max j k)),
            (Nat.le_max_right j k).trans (Nat.le_max_right i (max j k))])
  have hLHS : {x ∈ (Set.univ : Set ℕ) | ∀ p ∈ [(i, true), (j, true), (k, false)],
      (p.2 = true ↔ x ∈ idxSet (e P) p.1)}
      = ((Set.univ : Set ℕ) ∩ idxSet (e P) i ∩ idxSet (e P) j) \ idxSet (e P) k := by
    ext x
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_sdiff, Set.mem_inter_iff]
    tauto
  have hRHS : {y ∈ U.master |
      ∀ p ∈ [(i, true), (j, true), (k, false)], (p.2 = true ↔ y ∈ Yc P p.1)}
```

```
      = (U.master ∩ Yc P i ∩ Yc P j) \ Yc P k := by
    ext y
    simp only [Set.mem_ofPred_eq, Set.mem_sdiff, Set.mem_inter_iff]
    constructor
    · rintro ⟨hyM, hcs⟩
      have h1 : y ∈ Yc P i := (hcs (i, true) (by simp)).mp rfl
      have h2 : y ∈ Yc P j := (hcs (j, true) (by simp)).mp rfl
      have h3 : y ∈ Yc P k := fun hmem =>
        absurd ((hcs (k, false) (by simp)).mpr hmem) Bool.false_ne_true
      exact ⟨⟨hyM, h1⟩, h2⟩, h3⟩
    · rintro ⟨⟨hyM, h1⟩, h2⟩, h3⟩
      refine ⟨hyM, fun p hp => ?_⟩
      simp only [List.mem_cons, List.not_mem_nil, or_false] at hp
      rcases hp with rfl | rfl | rfl
      · exact ⟨fun _ => h1, fun _ => rfl⟩
      · exact ⟨fun _ => h2, fun _ => rfl⟩
      · exact ⟨fun hc => absurd hc Bool.false_ne_true, fun hmem => absurd hmem h3⟩
  rw [hLHS, hRHS] at key
  rw [← Set.sdiff_eq_empty, ← Set.sdiff_eq_empty, ← Set.not_nonempty_iff_eq_empty,
    ← Set.not_nonempty_iff_eq_empty, not_iff_not]
  exact key

theorem transfer_inter_empty_iff_idxYc (i j : ℕ) :
    (Set.univ : Set ℕ) ∩ idxSet (e P) i ∩ idxSet (e P) j = ∅ ↔
      U.master ∩ Yc P i ∩ Yc P j = ∅ := by
  have key := transfer_empty_iff_idxYc P (cs := [(i, true), (j, true)]) (n := max i j
    + 1)
    (by simp only [List.mem_cons, List.not_mem_nil, or_false]
        rintro p (rfl | rfl) <;> simp)
  have hLHS : {x ∈ (Set.univ : Set ℕ) | ∀ p ∈ [(i, true), (j, true)],
      (p.2 = true ↔ x ∈ idxSet (e P) p.1)} = (Set.univ : Set ℕ) ∩ idxSet (e P) i ∩
    idxSet (e P) j := by
    ext x
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_inter_iff]
    tauto
  have hRHS : {y ∈ U.master | ∀ p ∈ [(i, true), (j, true)], (p.2 = true ↔ y ∈ Yc P p
    .1)}
      = U.master ∩ Yc P i ∩ Yc P j := by
    ext y
    simp only [Set.mem_ofPred_eq, Set.mem_inter_iff]
    constructor
    · rintro ⟨hyM, hcs⟩
      exact ⟨⟨hyM, (hcs (i, true) (by simp)).mp rfl⟩, (hcs (j, true) (by simp)).mp rfl⟩
    · rintro ⟨⟨hyM, h1⟩, h2⟩
      refine ⟨hyM, fun p hp => ?_⟩
      simp only [List.mem_cons, List.not_mem_nil, or_false] at hp
      rcases hp with rfl | rfl
      · exact ⟨fun _ => h1, fun _ => rfl⟩
      · exact ⟨fun _ => h2, fun _ => rfl⟩
  rw [hLHS, hRHS] at key
  rw [← Set.not_nonempty_iff_eq_empty, ← Set.not_nonempty_iff_eq_empty, not_iff_not]
  exact key

theorem transfer_subset_iff_idxYc (i j : ℕ) :
    (Set.univ : Set ℕ) ∩ idxSet (e P) i ⊆ idxSet (e P) j ↔
```

```
      U.master ∩ Yc P i ⊆ Yc P j := by
  have key := transfer_empty_iff_idxYc P (cs := [(i, true), (j, false)]) (n := max i j
     + 1)
    (by simp only [List.mem_cons, List.not_mem_nil, or_false]
        rintro p (rfl | rfl) <;> simp)
  have hLHS : {x ∈ (Set.univ : Set ℕ) | ∀ p ∈ [(i, true), (j, false)],
      (p.2 = true ↔ x ∈ idxSet (e P) p.1)} = ((Set.univ : Set ℕ) ∩ idxSet (e P) i) \
    idxSet (e P) j := by
    ext x
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_sdiff, Set.mem_inter_iff]
    tauto
  have hRHS : {y ∈ U.master | ∀ p ∈ [(i, true), (j, false)], (p.2 = true ↔ y ∈ Yc P p
    .1)}
      = (U.master ∩ Yc P i) \ Yc P j := by
    ext y
    simp only [Set.mem_ofPred_eq, Set.mem_sdiff, Set.mem_inter_iff]
    constructor
    · rintro ⟨hyM, hcs⟩
      have h1 : y ∈ Yc P i := (hcs (i, true) (by simp)).mp rfl
      have h2 : y ∈ Yc P j := fun hmem =>
        absurd ((hcs (j, false) (by simp)).mpr hmem) Bool.false_ne_true
      exact ⟨⟨hyM, h1⟩, h2⟩
    · rintro ⟨⟨hyM, h1⟩, h2⟩
      refine ⟨hyM, fun p hp => ?_⟩
      simp only [List.mem_cons, List.not_mem_nil, or_false] at hp
      rcases hp with rfl | rfl
      · exact ⟨fun _ => h1, fun _ => rfl⟩
      · exact ⟨fun hc => absurd hc Bool.false_ne_true, fun hmem => absurd hmem h2⟩
  rw [hLHS, hRHS] at key
  rw [← Set.sdiff_eq_empty, ← Set.sdiff_eq_empty, ← Set.not_nonempty_iff_eq_empty,
    ← Set.not_nonempty_iff_eq_empty, not_iff_not]
  exact key

theorem embed_subset_iff_code (i j : ℕ) : idxSet (e P) i ⊆ idxSet (e P) j ↔ Yc P i ⊆
    Yc P j := by
  have := transfer_subset_iff_idxYc P i j
  rwa [Set.univ_inter, Set.inter_eq_self_of_subset_right (Yc_subset_master P i)] at
    this

theorem embed_eq_iff_code (i j : ℕ) : idxSet (e P) i = idxSet (e P) j ↔ Yc P i = Yc P
    j :=
  ⟨fun h => Set.Subset.antisymm ((embed_subset_iff_code P i j).mp h.subset)
      ((embed_subset_iff_code P j i).mp h.symm.subset),
    fun h => Set.Subset.antisymm ((embed_subset_iff_code P i j).mpr h.subset)
      ((embed_subset_iff_code P j i).mpr h.symm.subset)⟩

theorem embed_eq_iff_raw_code (i j : ℕ) : e P i = e P j ↔ Yc P i = Yc P j := by
  rw [← idxSet_eq_iff (e P) i j]
  exact embed_eq_iff_code P i j

theorem embed_subset_iff_raw_code (i j : ℕ) : e P i ⊆ e P j ↔ Yc P i ⊆ Yc P j := by
  rw [← idxSet_subset_iff (e P) i j]
  exact embed_subset_iff_code P i j

theorem DprimeUCode_cons_computable :
```

```
    RecDecidable₂ (fun i j => ∃ k, Yc P k ⊆ Yc P i ∩ Yc P j) := by
  refine RecDecidable.of_iff (fun t => ?_) (P0 P).cons_computable
  simp only [Set.subset_inter_iff]
  exact exists_congr (fun k => by
    rw [← embed_subset_iff_raw_code P k t.unpair.1, ← embed_subset_iff_raw_code P k t
    .unpair.2])

theorem transfer_inter_eq_iff_idxYc (i j k : ℕ) :
    idxSet (e P) i ∩ idxSet (e P) j = idxSet (e P) k ↔ Yc P i ∩ Yc P j = Yc P k := by
  have h1 : idxSet (e P) k ⊆ idxSet (e P) i ↔ Yc P k ⊆ Yc P i :=
    embed_subset_iff_code P k i
  have h2 : idxSet (e P) k ⊆ idxSet (e P) j ↔ Yc P k ⊆ Yc P j :=
    embed_subset_iff_code P k j
  have h3 : idxSet (e P) i ∩ idxSet (e P) j ⊆ idxSet (e P) k ↔
      Yc P i ∩ Yc P j ⊆ Yc P k := by
    have := transfer_double_subset_iff_idxYc P i j k
    rwa [Set.univ_inter, Set.inter_eq_self_of_subset_right (Yc_subset_master P i)] at
    this
  constructor
  · intro heq
    have hki : idxSet (e P) k ⊆ idxSet (e P) i := heq ▸ Set.inter_subset_left
    have hkj : idxSet (e P) k ⊆ idxSet (e P) j := heq ▸ Set.inter_subset_right
    have hijk : idxSet (e P) i ∩ idxSet (e P) j ⊆ idxSet (e P) k := heq ▸ subset_rfl
    exact Set.Subset.antisymm (h3.mp hijk) (Set.subset_inter (h1.mp hki) (h2.mp hkj))
  · intro heq
    have hki : Yc P k ⊆ Yc P i := by rw [← heq]; exact Set.inter_subset_left
    have hkj : Yc P k ⊆ Yc P j := by rw [← heq]; exact Set.inter_subset_right
    have hijk : Yc P i ∩ Yc P j ⊆ Yc P k := by rw [heq]
    exact Set.Subset.antisymm (h3.mpr hijk) (Set.subset_inter (h1.mpr hki) (h2.mpr hkj
    ))

theorem DprimeUCode_interEq_computable :
    RecDecidable₃ (fun i j k => Yc P i ∩ Yc P j = Yc P k) := by
  have hcomb : RecDecidable₃ (fun i j k =>
      ((P0 P).X k ⊆ (P0 P).X i ∧ (P0 P).X k ⊆ (P0 P).X j) ∧ DAtom (P0 P) [i, j] [k] =
    ∅) :=
    (inclK_i_recDecidable_code P |>.and (inclK_j_recDecidable_code P)).and (
    DAtom_pair_recDecidable P)
  refine RecDecidable.of_iff (fun t => ?_) hcomb
  dsimp only
  rw [← transfer_inter_eq_iff_idxYc P t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair
    .2,
    idxSet_inter_eq_iff_DAtom (P0 P) t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair
    .2]
  tauto

theorem DprimeUCode_inter_spec {n m : ℕ} (h : ∃ k, Yc P k ⊆ Yc P n ∩ Yc P m) :
    Yc P ((P0 P).inter n m) = Yc P n ∩ Yc P m := by
  have h' : ∃ k, (P0 P).X k ⊆ (P0 P).X n ∩ (P0 P).X m := by
    obtain ⟨k, hk⟩ := h
    rw [Set.subset_inter_iff] at hk
    exact ⟨k, Set.subset_inter ((embed_subset_iff_raw_code P k n).mpr hk.1)
      ((embed_subset_iff_raw_code P k m).mpr hk.2)⟩
  have heP : (P0 P).X ((P0 P).inter n m) = (P0 P).X n ∩ (P0 P).X m := (P0 P).
    inter_spec h'
  have hidx : idxSet (e P) n ∩ idxSet (e P) m = idxSet (e P) ((P0 P).inter n m) :=
```

```
    idxSet_inter_of_inter_eq (e P) heP.symm
  exact ((transfer_inter_eq_iff_idxYc P n m ((P0 P).inter n m)).mp hidx).symm

theorem exists_inter_index_of_dmem_code {i j : ℕ} (hDij : D.mem (e P i ∩ e P j)) :
    ∃ m, e P i ∩ e P j = e P m ∧ Yc P i ∩ Yc P j = Yc P m := by
  obtain ⟨m, hm⟩ := (hcover P (e P i ∩ e P j)).mp hDij
  exact ⟨m, hm, (transfer_inter_eq_iff_idxYc P i j m).mp (idxSet_inter_of_inter_eq (e P
    ) hm)⟩

noncomputable def DprimeUCode : NeighborhoodSystem ? where
  mem Y := ∃ n, Y = Yc P n
  master := U.master
  master_nonempty := U.master_nonempty
  master_mem := ⟨0, (Yc_zero_eq_master P).symm⟩
  sub_master := by rintro Y ⟨n, rfl⟩; exact Yc_subset_master P n
  inter_mem := by
    rintro X Y Z ⟨i, rfl⟩ ⟨j, rfl⟩ ⟨k, rfl⟩ hZsub
    have h1 : e P k ⊆ e P i := (embed_subset_iff_raw_code P k i).mpr (hZsub.trans Set.
    inter_subset_left)
    have h2 : e P k ⊆ e P j := (embed_subset_iff_raw_code P k j).mpr (hZsub.trans Set.
    inter_subset_right)
    obtain ⟨m, -, hYeq⟩ := exists_inter_index_of_dmem_code P
      (D.inter_mem (D_mem_e D (e P) (hcover P) i) (D_mem_e D (e P) (hcover P) j)
        (D_mem_e D (e P) (hcover P) k) (Set.subset_inter h1 h2))
    exact ⟨m, hYeq⟩

noncomputable def DprimeUCodePresentation : ComputablePresentation (DprimeUCode P)
    where
  X n := Yc P n
  mem_X n := ⟨n, rfl⟩
  surj := fun hY => hY.imp (fun _ h => h.symm)
  interEq_computable := DprimeUCode_interEq_computable P
  cons_computable := DprimeUCode_cons_computable P
  inter n m := (P0 P).inter n m
  inter_primrec := (P0 P).inter_primrec
  inter_spec h := DprimeUCode_inter_spec P h
  masterIdx := 0
  masterIdx_spec := Yc_zero_eq_master P

theorem exists_inter_index_of_nonempty_code {i j : ℕ} (hne : (Yc P i ∩ Yc P j).
    Nonempty) :
    ∃ m, e P i ∩ e P j = e P m ∧ Yc P i ∩ Yc P j = Yc P m := by
  have hne' : (idxSet (e P) i ∩ idxSet (e P) j).Nonempty := by
    by_contra hcon
    rw [Set.not_nonempty_iff_eq_empty] at hcon
    have hkey := transfer_inter_empty_iff_idxYc P i j
    rw [Set.univ_inter, Set.inter_eq_self_of_subset_right (Yc_subset_master P i)] at
    hkey
    exact hne.ne_empty (hkey.mp hcon)
  obtain ⟨k, hki, hkj⟩ := hne'
  exact exists_inter_index_of_dmem_code P
    (D.inter_mem (D_mem_e D (e P) (hcover P) i) (D_mem_e D (e P) (hcover P) j)
      (D_mem_e D (e P) (hcover P) k) (Set.subset_inter hki hkj))

theorem DprimeUCode_subsystem : DprimeUCode P ? U where
  master_eq := rfl
```

```
  sub := by rintro Y ⟨n, rfl⟩; exact (U_mem_UX (YseqCode P n))
  inter_closed := by
    rintro X Y ⟨i, rfl⟩ ⟨j, rfl⟩ hUmem
    obtain ⟨m, -, hYeq⟩ := exists_inter_index_of_nonempty_code P hUmem.2.1
    exact ⟨m, hYeq⟩

end

end DomainTheory.NeighbourhoodSystems
```

domainIsoCode.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    DprimeUCode
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)

def toDCode (y : (DprimeUCode P).Element) : D.Element where
  mem S := ∃ n, S = e P n ∧ y.mem (Yc P n)
  sub := fun ⟨n, hn, _⟩ => hn ▸ D_mem_e D (e P) (hcover P) n
  master_mem := ⟨0, (he0 P).symm, by rw [Yc_zero_eq_master P]; exact y.master_mem⟩
  inter_mem := by
    rintro S T ⟨i, rfl, hyi⟩ ⟨j, rfl, hyj⟩
    have hD'mem : (DprimeUCode P).mem (Yc P i ∩ Yc P j) := y.sub (y.inter_mem hyi hyj)
    obtain ⟨m, hem, hYeq⟩ := exists_inter_index_of_nonempty_code P
      ((DprimeUCode_subsystem P).sub hD'mem).2.1
    exact ⟨m, hem, hYeq ▸ y.inter_mem hyi hyj⟩
  up_mem := by
    rintro S T ⟨i, rfl, hyi⟩ hDT hST
    obtain ⟨j, rfl⟩ := (hcover P T).mp hDT
    have hYij : Yc P i ⊆ Yc P j := (embed_subset_iff_raw_code P i j).mp hST
    exact ⟨j, rfl, y.up_mem hyi ⟨j, rfl⟩ hYij⟩

def toDprimeUCode (x : D.Element) : (DprimeUCode P).Element where
  mem Y := ∃ n, Y = Yc P n ∧ x.mem (e P n)
  sub := fun ⟨n, hn, _⟩ => ⟨n, hn⟩
  master_mem := ⟨0, (Yc_zero_eq_master P).symm, by rw [he0 P]; exact x.master_mem⟩
  inter_mem := by
    rintro X Y ⟨i, rfl, hxi⟩ ⟨j, rfl, hxj⟩
    obtain ⟨m, hem, hYeq⟩ :=
      exists_inter_index_of_dmem_code P (x.sub (x.inter_mem hxi hxj))
    exact ⟨m, hYeq, hem ▸ x.inter_mem hxi hxj⟩
  up_mem := by
```

```
    rintro X Y ⟨i, rfl, hxi⟩ ⟨j, rfl⟩ hXY
    have heij : e P i ⊆ e P j := (embed_subset_iff_raw_code P i j).mpr hXY
    exact ⟨j, rfl, x.up_mem hxi (D_mem_e D (e P) (hcover P) j) heij⟩

noncomputable def domainIsoCode : DomainIso D (DprimeUCode P) where
  toFun := toDprimeUCode P
  invFun := toDCode P
  left_inv x := by
    apply Element.ext
    intro S
    constructor
    · rintro ⟨n, hn, k, hk, hxk⟩
      rw [hn, (embed_eq_iff_raw_code P n k).mpr hk]
      exact hxk
    · intro hS
      obtain ⟨n, hn⟩ := (hcover P S).mp (x.sub hS)
      refine ⟨n, hn, n, rfl, ?_⟩
      rwa [← hn]
  right_inv y := by
    apply Element.ext
    intro Y
    constructor
    · rintro ⟨n, hn, k, hk, hyk⟩
      rw [hn, (embed_eq_iff_raw_code P n k).mp hk]
      exact hyk
    · intro hY
      obtain ⟨n, hn⟩ := y.sub hY
      refine ⟨n, hn, n, rfl, ?_⟩
      rwa [← hn]
  map_rel_iff' := by
    intro x x2
    constructor
    · intro hle S hxS
      obtain ⟨n, hn⟩ := (hcover P S).mp (x.sub hxS)
      have hxn : x.mem (e P n) := hn ▸ hxS
      obtain ⟨k, hk, hx2k⟩ := hle _ (⟨n, rfl, hxn⟩ : (toDprimeUCode P x).mem (Yc P n))
      rw [hn, (embed_eq_iff_raw_code P n k).mpr hk]
      exact hx2k
    · intro hle Y hY
      obtain ⟨n, hn, hxn⟩ := hY
      exact ⟨n, hn, hle _ hxn⟩

theorem DprimeUCode_isEffectivelyGiven : (DprimeUCode P).IsEffectivelyGiven :=
  ⟨DprimeUCodePresentation P⟩

theorem isomorphic_DprimeUCode : D ≅? DprimeUCode P := ⟨domainIsoCode P⟩

theorem DprimeUCode_inj_isComputableMap :
    ComputableMap (DprimeUCodePresentation P) UComputablePresentation
      (DprimeUCode_subsystem P).inj := by
  constructor
  have hg : Nat.Primrec (fun t : ℕ => Nat.pair (YseqCode P t.unpair.1) t.unpair.2) :=
    Nat.Primrec.pair ((primrec_YseqCode P).comp Nat.Primrec.left) Nat.Primrec.right
  have hp : RecDecidable (fun t : ℕ => UX (YseqCode P t.unpair.1) ⊆ UX t.unpair.2) :=
    by
    refine RecDecidable.of_iff (fun t => ?_) (UComputablePresentation.incl_computable.
```

```
    comp hg)
    simp only [unpair_pair_fst, unpair_pair_snd]
    rfl
  refine REPred.of_iff (fun t => ?_) hp.re
  show (DprimeUCode_subsystem P).inj.rel (Yc P t.unpair.1) (UX t.unpair.2) ↔ _
  rw [Subsystem.inj_rel]
  exact ⟨fun ⟨_, _, hsub⟩ => hsub,
    fun hsub => ⟨⟨t.unpair.1, rfl⟩, U_mem_UX _, hsub⟩⟩

theorem DprimeUCode_proj_isComputableMap :
    ComputableMap UComputablePresentation (DprimeUCodePresentation P)
      (DprimeUCode_subsystem P).proj := by
  constructor
  have hg : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.1 (YseqCode P t.unpair.2)) :=
    Nat.Primrec.pair Nat.Primrec.left ((primrec_YseqCode P).comp Nat.Primrec.right)
  have hp : RecDecidable (fun t : ℕ => UX t.unpair.1 ⊆ UX (YseqCode P t.unpair.2)) :=
    by
    refine RecDecidable.of_iff (fun t => ?_) (UComputablePresentation.incl_computable.
    comp hg)
    simp only [unpair_pair_fst, unpair_pair_snd]
    rfl
  refine REPred.of_iff (fun t => ?_) hp.re
  show (DprimeUCode_subsystem P).proj.rel (UX t.unpair.1) (Yc P t.unpair.2) ↔ _
  rw [Subsystem.proj_rel]
  exact ⟨fun ⟨_, _, hsub⟩ => hsub,
    fun hsub => ⟨U_mem_UX _, ⟨t.unpair.2, rfl⟩, hsub⟩⟩

theorem DprimeUCode_projectionPair_isComputable :
    ComputableMap (DprimeUCodePresentation P) UComputablePresentation
        (DprimeUCode_subsystem P).inj ∧
      ComputableMap UComputablePresentation (DprimeUCodePresentation P)
        (DprimeUCode_subsystem P).proj :=
  ⟨DprimeUCode_inj_isComputableMap P, DprimeUCode_proj_isComputableMap P⟩

end

section
open NeighborhoodSystem Domain.Recursive ApproximableMap
variable {α : Type*} {D : NeighborhoodSystem α} (P : ComputablePresentation D)

noncomputable def isoInj : ApproximableMap D (DprimeUCode P) := ofIso (domainIsoCode P
    )

noncomputable def isoProj : ApproximableMap (DprimeUCode P) D := ofIso (domainIsoCode
    P).symm

theorem isoInj_comp_isoProj : (isoInj P).comp (isoProj P) = idMap (DprimeUCode P) :=
    by
  apply ext_of_toElementMap
  intro y
  rw [toElementMap_comp]
  show (isoInj P).toElementMap ((isoProj P).toElementMap y) = _
  rw [isoInj, isoProj, toElementMap_ofIso, toElementMap_ofIso, OrderIso.
    apply_symm_apply,
    toElementMap_idMap]
```

```
theorem isoInj_rel_iff_incl {a b : ℕ} :
    (isoInj P).rel (P.X a) (Yc P b) ↔ P.X a ⊆ P.X (eIdx P b) := by
  show (∃ _ : D.mem (P.X a), (toDprimeUCode P (D.principal (P.mem_X a))).mem (Yc P b))
    ↔ _
  simp only [toDprimeUCode, mem_principal]
  have hb : e P b = P.X (eIdx P b) := rfl
  constructor
  · rintro ⟨-, n, hn, -, hsub⟩
    rwa [← hb, (embed_eq_iff_raw_code P b n).mpr hn]
  · intro hsub
    exact ⟨P.mem_X a, b, rfl, (P0 P).mem_X b, hb ▸ hsub⟩

theorem isoInj_isComputableMap : ComputableMap P (DprimeUCodePresentation P) (isoInj P
    ) := by
  constructor
  have hg : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.1 (eIdx P t.unpair.2)) :=
    Nat.Primrec.pair Nat.Primrec.left ((eIdx_primrec P).comp Nat.Primrec.right)
  have hp : RecDecidable (fun t : ℕ => P.X t.unpair.1 ⊆ P.X (eIdx P t.unpair.2)) := by
    refine RecDecidable.of_iff (fun t => ?_) (P.incl_computable.comp hg)
    simp only [unpair_pair_fst, unpair_pair_snd]
  refine REPred.of_iff (fun t => ?_) hp.re
  show (isoInj P).rel (P.X t.unpair.1) ((DprimeUCodePresentation P).X t.unpair.2) ↔ _
  exact isoInj_rel_iff_incl P

theorem isoProj_comp_isoInj : (isoProj P).comp (isoInj P) = idMap D := by
  apply ext_of_toElementMap
  intro x
  rw [toElementMap_comp]
  show (isoProj P).toElementMap ((isoInj P).toElementMap x) = _
  rw [isoInj, isoProj, toElementMap_ofIso, toElementMap_ofIso, OrderIso.
    symm_apply_apply,
    toElementMap_idMap]

theorem isoProj_rel_iff_incl {b a : ℕ} :
    (isoProj P).rel (Yc P b) (P.X a) ↔ Yc P b ⊆ Yc P (eIdx P a) := by
  show (∃ _ : (DprimeUCode P).mem (Yc P b),
      (toDCode P ((DprimeUCode P).principal ⟨b, rfl⟩)).mem (P.X a)) ↔ _
  simp only [toDCode]
  have hea : e P (eIdx P a) = P.X a := by
    show P.X (eIdx P (eIdx P a)) = P.X a
    rw [eIdx_involutive P a]
  constructor
  · rintro ⟨-, m, hm, -, hsub⟩
    have heq : e P (eIdx P a) = e P m := hea.trans hm
    rw [(embed_eq_iff_raw_code P (eIdx P a) m).mp heq]
    exact hsub
  · intro hsub
    exact ⟨⟨b, rfl⟩, eIdx P a, hea.symm, ⟨eIdx P a, rfl⟩, hsub⟩

theorem isoProj_isComputableMap : ComputableMap (DprimeUCodePresentation P) P (isoProj
     P) := by
  constructor
  have hg : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.1 (eIdx P t.unpair.2)) :=
    Nat.Primrec.pair Nat.Primrec.left ((eIdx_primrec P).comp Nat.Primrec.right)
  have hp : RecDecidable (fun t : ℕ => Yc P t.unpair.1 ⊆ Yc P (eIdx P t.unpair.2)) :=
    by
```

```
    refine RecDecidable.of_iff (fun t => ?_) ((DprimeUCodePresentation P).
    incl_computable.comp hg)
    simp only [unpair_pair_fst, unpair_pair_snd]
    rfl
  refine REPred.of_iff (fun t => ?_) hp.re
  show (isoProj P).rel ((DprimeUCodePresentation P).X t.unpair.1) (P.X t.unpair.2) ↔ _
  exact isoProj_rel_iff_incl P

end

end DomainTheory.NeighbourhoodSystems
```

ProjectionCombinators.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_9

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Proposition_8_10

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

theorem exercise_8_18_assembly {a b : ApproximableMap U U} (ha : IsProjection a) (hb :
     IsProjection b) :
    (IsProjection (sumComb a b) ∧ IsProjection (prodComb a b) ∧ IsProjection (
    arrowComb a b)) ∧
      (FinitaryProjection a → FinitaryProjection b →
        FinitaryProjection (sumComb a b) ∧ FinitaryProjection (prodComb a b) ∧
          FinitaryProjection (arrowComb a b)) :=
  ⟨isProjection_combinators ha hb, fun hfa hfb => finitaryProjection_combinators hfa
    hfb⟩

set_option linter.unusedVariables false

theorem example_818 : ∀
  {a b :
    @DomainTheory.NeighbourhoodSystems.ApproximableMap Rat Rat DomainTheory.
    NeighbourhoodSystems.U
      DomainTheory.NeighbourhoodSystems.U},
  @DomainTheory.NeighbourhoodSystems.IsProjection Rat DomainTheory.
    NeighbourhoodSystems.U a →
    @DomainTheory.NeighbourhoodSystems.IsProjection Rat DomainTheory.
    NeighbourhoodSystems.U b →
      And
        (And
          (@DomainTheory.NeighbourhoodSystems.IsProjection Rat DomainTheory.
    NeighbourhoodSystems.U
            (DomainTheory.NeighbourhoodSystems.sumComb a b))
          (And
            (@DomainTheory.NeighbourhoodSystems.IsProjection Rat DomainTheory.
```

```
    NeighbourhoodSystems.U
              (DomainTheory.NeighbourhoodSystems.prodComb a b))
            (@DomainTheory.NeighbourhoodSystems.IsProjection Rat DomainTheory.
    NeighbourhoodSystems.U
              (DomainTheory.NeighbourhoodSystems.arrowComb a b))))
        (@DomainTheory.NeighbourhoodSystems.FinitaryProjection Rat DomainTheory.
    NeighbourhoodSystems.U a →
          @DomainTheory.NeighbourhoodSystems.FinitaryProjection Rat DomainTheory.
    NeighbourhoodSystems.U b →
            And
              (@DomainTheory.NeighbourhoodSystems.FinitaryProjection Rat DomainTheory.
    NeighbourhoodSystems.U
                (DomainTheory.NeighbourhoodSystems.sumComb a b))
              (And
                (@DomainTheory.NeighbourhoodSystems.FinitaryProjection Rat
    DomainTheory.NeighbourhoodSystems.U
                  (DomainTheory.NeighbourhoodSystems.prodComb a b))
                (@DomainTheory.NeighbourhoodSystems.FinitaryProjection Rat
    DomainTheory.NeighbourhoodSystems.U
                  (DomainTheory.NeighbourhoodSystems.arrowComb a b)))) :=
  @DomainTheory.NeighbourhoodSystems.exercise_8_18_assembly

end DomainTheory.NeighbourhoodSystems
```

atomPairCodeState.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    domainIso812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableDiff
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableSplit
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.xStepG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.yStepG
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

def packState2 (idx0 idx1 junk : ℕ) : ℕ := Nat.pair idx0 (Nat.pair idx1 junk)

def stateIdx0 (s : ℕ) : ℕ := s.unpair.1

@[simp] theorem stateIdx0_packState2 (a b c : ℕ) : stateIdx0 (packState2 a b c) = a :=
     by
  unfold stateIdx0 packState2; simp only [unpair_pair_fst]

def stateIdx1 (s : ℕ) : ℕ := s.unpair.2.unpair.1

@[simp] theorem stateIdx1_packState2 (a b c : ℕ) : stateIdx1 (packState2 a b c) = b :=
```

```
    by
  unfold stateIdx1 packState2; simp only [unpair_pair_fst, unpair_pair_snd]

def stateJunk (s : ℕ) : ℕ := s.unpair.2.unpair.2

@[simp] theorem stateJunk_packState2 (a b c : ℕ) : stateJunk (packState2 a b c) = c :=
    by
  unfold stateJunk packState2; simp only [unpair_pair_snd]

def packStateC (rem s : ℕ) : ℕ := Nat.pair rem s

section XSubStep

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)

def xwB1 (w : ℕ) : ℕ := w.unpair.2.unpair.1

def xwN (w : ℕ) : ℕ := w.unpair.1

def xwS (w : ℕ) : ℕ := w.unpair.2.unpair.2

end XSubStep

open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

def stateRemC (t : ℕ) : ℕ := t.unpair.1

namespace stateRemC
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

@[simp] theorem packStateC (a b : ℕ) : stateRemC (_root_.DomainTheory.
    NeighbourhoodSystems.packStateC a b) = a := by
  unfold stateRemC _root_.DomainTheory.NeighbourhoodSystems.packStateC; simp only [
    unpair_pair_fst]

end stateRemC
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

def stateBase2 (masterIdx0 masterIdx1 : ℕ) : ℕ := packState2 masterIdx0 masterIdx1 0

def stateInnerC (t : ℕ) : ℕ := t.unpair.2

@[simp] theorem stateInnerC_packStateC (a b : ℕ) : stateInnerC (packStateC a b) = b :=
    by
  unfold stateInnerC packStateC; simp only [unpair_pair_snd]

section AtomPairCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
```

```
    _1 splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    _0 splitY)

def atomPairBase (k : ℕ) : ℕ := packStateC k (stateBase2 P₀.masterIdx P₁.masterIdx)

end AtomPairCode

section XSubStep

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    _1 splitX)

noncomputable def xSubStep (w : ℕ) : ℕ :=
  let n := xwN w
  let b1 := xwB1 w
  let s := xwS w
  let idx0 := stateIdx0 s
  let idx1 := stateIdx1 s
  let junk := stateJunk s
  let directIdx := selectFn b1 (P₀.inter idx0 n) (hDiff0.diffIdx idx0 n)
  let directEmpty := selectFn b1 (emptyInterDec P₀ (Nat.pair idx0 n))
    (IsComputableDiff.emptyDiffDec P₀ hDiff0 (Nat.pair idx0 n))
  let splitIdx := selectFn b1 (hSplitX.posIdx idx0 idx1 n) (hSplitX.negIdx idx0 idx1 n
    )
  let newJunk := selectFn junk 1 directEmpty
  packState2 (selectFn newJunk 0 directIdx) (selectFn newJunk 0 splitIdx) newJunk

end XSubStep

section YSubStep

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff1 : IsComputableDiff P₁)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    _0 splitY)

noncomputable def ySubStep (w : ℕ) : ℕ :=
  let n := xwN w
  let b2 := xwB1 w
  let s := xwS w
  let idx0 := stateIdx0 s
  let idx1 := stateIdx1 s
  let junk := stateJunk s
  let directIdx := selectFn b2 (P₁.inter idx1 n) (hDiff1.diffIdx idx1 n)
  let directEmpty := selectFn b2 (emptyInterDec P₁ (Nat.pair idx1 n))
    (IsComputableDiff.emptyDiffDec P₁ hDiff1 (Nat.pair idx1 n))
  let splitIdx := selectFn b2 (hSplitY.posIdx idx1 idx0 n) (hSplitY.negIdx idx1 idx0 n
    )
  let newJunk := selectFn junk 1 directEmpty
  packState2 (selectFn newJunk 0 splitIdx) (selectFn newJunk 0 directIdx) newJunk
```

```
end YSubStep

section AtomPairCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)

def pcN (w : ℕ) : ℕ := xwB1 w

def pcT (w : ℕ) : ℕ := xwS w

noncomputable def atomPairStep (w : ℕ) : ℕ :=
  let n := pcN w
  let T := pcT w
  let rem := stateRemC T
  let s := stateInnerC T
  let b1 := rem % 2
  let b2 := (rem / 2) % 2
  let s1 := xSubStep P₀ P₁ hDiff0 splitX hSplitX (Nat.pair n (Nat.pair b1 s))
  let s2 := ySubStep P₀ P₁ hDiff1 splitY hSplitY (Nat.pair n (Nat.pair b2 s1))
  packStateC (rem / 4) s2

noncomputable def atomPairCodeState (t : ℕ) : ℕ :=
  t.unpair.2.rec (atomPairBase P₀ P₁ t.unpair.1) (fun y IH =>
    atomPairStep P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
      (Nat.pair t.unpair.1 (Nat.pair y IH)))

end AtomPairCode

namespace atomPairCodeState
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)

theorem succ (k n : ℕ) :
    atomPairCodeState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY (Nat.pair k (n
    + 1)) =
      atomPairStep P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
        (Nat.pair k (Nat.pair n (atomPairCodeState P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY
          hSplitY (Nat.pair k n)))) := by
  unfold atomPairCodeState
  simp only [unpair_pair_fst, unpair_pair_snd]

end atomPairCodeState
```

```
theorem junk_eq_zero_of_selectFn_eq_zero {junk X : ℕ} (h : selectFn junk 1 X = 0) :
    junk = 0 := by
  rcases Nat.eq_zero_or_pos junk with h0 | h0
  · exact h0
  · exfalso; unfold selectFn at h; have : 1 ≤ junk := h0; nlinarith

open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

namespace selectFn
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

theorem le_one {c a b : ℕ} (hc : c ≤ 1) (ha : a ≤ 1) (hb : b ≤ 1) :
    selectFn c a b ≤ 1 := by
  rcases (show c = 0 ∨ c = 1 from by omega) with h | h <;> rw [h]
  · rw [selectFn_zero]; exact hb
  · rw [selectFn_one]; exact ha

theorem one_eq_zero_iff {c X : ℕ} : selectFn c 1 X = 0 ↔ c = 0 ∧ X = 0 := by
  constructor
  · intro h
    have hc0 : c = 0 := junk_eq_zero_of_selectFn_eq_zero h
    subst hc0
    simpa [selectFn_zero] using h
  · rintro ⟨rfl, rfl⟩
    simp [selectFn_zero]

end selectFn

theorem diffIdx_eq_of_empty_zero {? : Type*} {W : NeighborhoodSystem ?} {Q :
    ComputablePresentation W}
    (hDiff : IsComputableDiff Q) {idx0 n0 : ℕ} (h : IsComputableDiff.emptyDiffDec Q
    hDiff (Nat.pair idx0 n0) = 0) :
    Q.X (hDiff.diffIdx idx0 n0) = Q.X idx0 \ Q.X n0 := by
  apply hDiff.diffIdx_spec
  have hle := IsComputableDiff.existsDiffDec.le_one Q hDiff (Nat.pair idx0 n0)
  have h1 : IsComputableDiff.existsDiffDec Q hDiff (Nat.pair idx0 n0) = 1 := by unfold
     IsComputableDiff.emptyDiffDec at h; omega
  exact (IsComputableDiff.existsDiffDec.spec Q hDiff idx0 n0).mp h1

theorem interIdx_eq_of_empty_zero {? : Type*} {W : NeighborhoodSystem ?} (Q :
    ComputablePresentation W)
    {idx0 n0 : ℕ} (h : emptyInterDec Q (Nat.pair idx0 n0) = 0) :
    Q.X (Q.inter idx0 n0) = Q.X idx0 ∩ Q.X n0 := by
  apply Q.inter_spec
  have hle := existsInterDec.le_one Q (Nat.pair idx0 n0)
  have h1 : existsInterDec Q (Nat.pair idx0 n0) = 1 := by unfold emptyInterDec at h;
    omega
  exact (existsInterDec.spec Q idx0 n0).mp h1

namespace xSubStep
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
```

```
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

theorem idx0_eq {s n b1 : ℕ}
    (h : selectFn (stateJunk s) 1 (selectFn b1 (emptyInterDec P₀ (Nat.pair (stateIdx0 s
    ) n))
      (IsComputableDiff.emptyDiffDec P₀ hDiff0 (Nat.pair (stateIdx0 s) n))) = 0) :
    stateIdx0 (xSubStep P₀ P₁ hDiff0 splitX hSplitX (Nat.pair n (Nat.pair b1 s))) =
      selectFn b1 (P₀.inter (stateIdx0 s) n) (hDiff0.diffIdx (stateIdx0 s) n) := by
  unfold xSubStep
  simp only [xwN, xwB1, xwS, unpair_pair_fst, unpair_pair_snd, stateIdx0_packState2, h
    ,
    selectFn_zero]

theorem idx1_eq {s n b1 : ℕ}
    (h : selectFn (stateJunk s) 1 (selectFn b1 (emptyInterDec P₀ (Nat.pair (stateIdx0 s
    ) n))
      (IsComputableDiff.emptyDiffDec P₀ hDiff0 (Nat.pair (stateIdx0 s) n))) = 0) :
    stateIdx1 (xSubStep P₀ P₁ hDiff0 splitX hSplitX (Nat.pair n (Nat.pair b1 s))) =
      selectFn b1 (hSplitX.posIdx (stateIdx0 s) (stateIdx1 s) n)
        (hSplitX.negIdx (stateIdx0 s) (stateIdx1 s) n) := by
  unfold xSubStep
  simp only [xwN, xwB1, xwS, unpair_pair_fst, unpair_pair_snd, stateIdx1_packState2, h
    ,
    selectFn_zero]

theorem junk_eq (s n b1 : ℕ) :
    stateJunk (xSubStep P₀ P₁ hDiff0 splitX hSplitX (Nat.pair n (Nat.pair b1 s))) =
      selectFn (stateJunk s) 1 (selectFn b1 (emptyInterDec P₀ (Nat.pair (stateIdx0 s) n
    ))
        (IsComputableDiff.emptyDiffDec P₀ hDiff0 (Nat.pair (stateIdx0 s) n))) := by
  unfold xSubStep
  simp only [xwN, xwB1, xwS, unpair_pair_fst, unpair_pair_snd, stateJunk_packState2]

include hD₀pos hD₀nomin hD₀diff hxSplit in

theorem correct {s n : ℕ} {A : Set α} {B : Set β}
    (hA : P₀.X (stateIdx0 s) = A) (hB : P₁.X (stateIdx1 s) = B)
    (hAB : A = ∅ ↔ B = ∅) (hBmem : B = ∅ ∨ D₁.mem B) (b : Bool)
    (hnonjunk : stateJunk (xSubStep P₀ P₁ hDiff0 splitX hSplitX
        (Nat.pair n (Nat.pair (if b then 1 else 0) s))) = 0) :
    P₀.X (stateIdx0 (xSubStep P₀ P₁ hDiff0 splitX hSplitX
        (Nat.pair n (Nat.pair (if b then 1 else 0) s)))) = (xStepG splitX A B (P₀.X n)
    b).1 ∧
    P₁.X (stateIdx1 (xSubStep P₀ P₁ hDiff0 splitX hSplitX
        (Nat.pair n (Nat.pair (if b then 1 else 0) s)))) = (xStepG splitX A B (P₀.X n)
    b).2 := by
  have hspec1 := hxSplit hAB hBmem (P₀.X n)
  subst hA; subst hB
```

```
  by_cases hb : b = true
  · simp only [xStepG, xyStep, hb, ite_true] at hnonjunk ⊢
    rw [xSubStep.junk_eq] at hnonjunk
    obtain ⟨-, hemp⟩ := selectFn.one_eq_zero_iff.mp hnonjunk
    rw [selectFn_one] at hemp
    have hemp' : P₀.X (stateIdx0 s) ∩ P₀.X n = ∅ :=
      (emptyInterDec.eq_one_iff P₀ hD₀pos hD₀nomin (stateIdx0 s) n).not.mp (by omega)
    have hne : (splitX (P₀.X (stateIdx0 s)) (P₁.X (stateIdx1 s)) (P₀.X n)).1 = ∅ :=
      hspec1.2.2.1.not.mp hemp'
    refine ⟨?_, ?_⟩
    · rw [xSubStep.idx0_eq (h := hnonjunk), selectFn_one]
      exact interIdx_eq_of_empty_zero P₀ hemp
    · rw [xSubStep.idx1_eq (h := hnonjunk), selectFn_one]
      exact (hSplitX.posIdx_spec (stateIdx0 s) (stateIdx1 s) n hne).symm
  · simp only [xStepG, xyStep, hb, Bool.false_eq_true, ite_false] at hnonjunk ⊢
    rw [xSubStep.junk_eq] at hnonjunk
    obtain ⟨-, hemp⟩ := selectFn.one_eq_zero_iff.mp hnonjunk
    rw [selectFn_zero] at hemp
    have hemp' : P₀.X (stateIdx0 s) \ P₀.X n = ∅ :=
      (IsComputableDiff.emptyDiffDec.eq_one_iff P₀ hDiff0 hD₀diff hD₀nomin (stateIdx0 s
    ) n).not.mp (by omega)
    have hne : (splitX (P₀.X (stateIdx0 s)) (P₁.X (stateIdx1 s)) (P₀.X n)).2 = ∅ :=
      hspec1.2.2.2.1.not.mp hemp'
    refine ⟨?_, ?_⟩
    · rw [xSubStep.idx0_eq (h := hnonjunk), selectFn_zero]
      exact diffIdx_eq_of_empty_zero hDiff0 hemp
    · rw [xSubStep.idx1_eq (h := hnonjunk), selectFn_zero]
      exact (hSplitX.negIdx_spec (stateIdx0 s) (stateIdx1 s) n hne).symm

end xSubStep

namespace ySubStep
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

theorem idx0_eq {s n b2 : ℕ}
    (h : selectFn (stateJunk s) 1 (selectFn b2 (emptyInterDec P₁ (Nat.pair (stateIdx1 s
    ) n))
      (IsComputableDiff.emptyDiffDec P₁ hDiff1 (Nat.pair (stateIdx1 s) n))) = 0) :
    stateIdx0 (ySubStep P₀ P₁ hDiff1 splitY hSplitY (Nat.pair n (Nat.pair b2 s))) =
      selectFn b2 (hSplitY.posIdx (stateIdx1 s) (stateIdx0 s) n)
        (hSplitY.negIdx (stateIdx1 s) (stateIdx0 s) n) := by
  unfold ySubStep
  simp only [xwN, xwB1, xwS, unpair_pair_fst, unpair_pair_snd, stateIdx0_packState2, h
```

```
    ,
    selectFn_zero]

theorem idx1_eq {s n b2 : ℕ}
    (h : selectFn (stateJunk s) 1 (selectFn b2 (emptyInterDec P₁ (Nat.pair (stateIdx1 s
    ) n))
      (IsComputableDiff.emptyDiffDec P₁ hDiff1 (Nat.pair (stateIdx1 s) n))) = 0) :
    stateIdx1 (ySubStep P₀ P₁ hDiff1 splitY hSplitY (Nat.pair n (Nat.pair b2 s))) =
      selectFn b2 (P₁.inter (stateIdx1 s) n) (hDiff1.diffIdx (stateIdx1 s) n) := by
  unfold ySubStep
  simp only [xwN, xwB1, xwS, unpair_pair_fst, unpair_pair_snd, stateIdx1_packState2, h
    ,
    selectFn_zero]

theorem junk_eq (s n b2 : ℕ) :
    stateJunk (ySubStep P₀ P₁ hDiff1 splitY hSplitY (Nat.pair n (Nat.pair b2 s))) =
      selectFn (stateJunk s) 1 (selectFn b2 (emptyInterDec P₁ (Nat.pair (stateIdx1 s) n
    ))
        (IsComputableDiff.emptyDiffDec P₁ hDiff1 (Nat.pair (stateIdx1 s) n))) := by
  unfold ySubStep
  simp only [xwN, xwB1, xwS, unpair_pair_fst, unpair_pair_snd, stateJunk_packState2]

include hD₁pos hD₁nomin hD₁diff hySplit in

theorem correct {s n : ℕ} {A : Set α} {B : Set β}
    (hA : P₀.X (stateIdx0 s) = A) (hB : P₁.X (stateIdx1 s) = B)
    (hBA : B = ∅ ↔ A = ∅) (hAmem : A = ∅ ∨ D₀.mem A) (b : Bool)
    (hnonjunk : stateJunk (ySubStep P₀ P₁ hDiff1 splitY hSplitY
        (Nat.pair n (Nat.pair (if b then 1 else 0) s))) = 0) :
    P₀.X (stateIdx0 (ySubStep P₀ P₁ hDiff1 splitY hSplitY
        (Nat.pair n (Nat.pair (if b then 1 else 0) s)))) = (yStepG splitY A B (P₁.X n)
    b).1 ∧
    P₁.X (stateIdx1 (ySubStep P₀ P₁ hDiff1 splitY hSplitY
        (Nat.pair n (Nat.pair (if b then 1 else 0) s)))) = (yStepG splitY A B (P₁.X n)
    b).2 := by
  have hspec2 := hySplit hBA hAmem (P₁.X n)
  subst hA; subst hB
  by_cases hb : b = true
  · simp only [yStepG, xyStep, Prod.swap, hb, ite_true] at hnonjunk ⊢
    rw [ySubStep.junk_eq] at hnonjunk
    obtain ⟨-, hemp⟩ := selectFn.one_eq_zero_iff.mp hnonjunk
    rw [selectFn_one] at hemp
    have hemp' : P₁.X (stateIdx1 s) ∩ P₁.X n = ∅ :=
      (emptyInterDec.eq_one_iff P₁ hD₁pos hD₁nomin (stateIdx1 s) n).not.mp (by omega)
    have hne : (splitY (P₁.X (stateIdx1 s)) (P₀.X (stateIdx0 s)) (P₁.X n)).1 = ∅ :=
      hspec2.2.2.1.not.mp hemp'
    refine ⟨?_, ?_⟩
    · rw [ySubStep.idx0_eq (h := hnonjunk), selectFn_one]
      exact (hSplitY.posIdx_spec (stateIdx1 s) (stateIdx0 s) n hne).symm
    · rw [ySubStep.idx1_eq (h := hnonjunk), selectFn_one]
      exact interIdx_eq_of_empty_zero P₁ hemp
  · simp only [yStepG, xyStep, Prod.swap, hb, Bool.false_eq_true, ite_false] at
    hnonjunk ⊢
    rw [ySubStep.junk_eq] at hnonjunk
    obtain ⟨-, hemp⟩ := selectFn.one_eq_zero_iff.mp hnonjunk
    rw [selectFn_zero] at hemp
```

```
    have hemp' : P₁.X (stateIdx1 s) \ P₁.X n = ∅ :=
      (IsComputableDiff.emptyDiffDec.eq_one_iff P₁ hDiff1 hD₁diff hD₁nomin (stateIdx1 s
    ) n).not.mp (by omega)
    have hne : (splitY (P₁.X (stateIdx1 s)) (P₀.X (stateIdx0 s)) (P₁.X n)).2 = ∅ :=
      hspec2.2.2.2.1.not.mp hemp'
    refine ⟨?_, ?_⟩
    · rw [ySubStep.idx0_eq (h := hnonjunk), selectFn_zero]
      exact (hSplitY.negIdx_spec (stateIdx1 s) (stateIdx0 s) n hne).symm
    · rw [ySubStep.idx1_eq (h := hnonjunk), selectFn_zero]
      exact diffIdx_eq_of_empty_zero hDiff1 hemp

end ySubStep

end DomainTheory.NeighbourhoodSystems
```

atomPairJunk.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairCodeState

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section AtomPairCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)

noncomputable def atomPairJunk (n k : ℕ) : ℕ :=
  stateJunk (stateInnerC (atomPairCodeState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
    (Nat.pair k n)))

end AtomPairCode

namespace atomPairJunk
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
```

```
theorem zero (k : ℕ) :
    atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 k = 0 := by
  unfold atomPairJunk
  simp [atomPairCodeState, atomPairBase, stateBase2]

theorem eq_zero_of_succ {k n : ℕ}
    (h : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY (n + 1) k = 0)
    :
    atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k = 0 := by
  unfold atomPairJunk at h ⊢
  rw [atomPairCodeState.succ] at h
  unfold atomPairStep pcN pcT xwB1 xwS at h
  simp only [unpair_pair_fst, unpair_pair_snd, stateInnerC_packStateC] at h
  rw [ySubStep.junk_eq] at h
  have h1 := junk_eq_zero_of_selectFn_eq_zero h
  rw [xSubStep.junk_eq] at h1
  exact junk_eq_zero_of_selectFn_eq_zero h1

theorem le_one (k n : ℕ) :
    atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k ≤ 1 := by
  induction n with
  | zero => simp [atomPairJunk, atomPairCodeState, atomPairBase, stateBase2]
  | succ n ih =>
    unfold atomPairJunk at ih ⊢
    rw [atomPairCodeState.succ]
    unfold atomPairStep pcN pcT xwB1 xwS
    simp only [unpair_pair_fst, unpair_pair_snd, stateInnerC_packStateC]
    set T := atomPairCodeState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY (Nat.
    pair k n)
    rw [ySubStep.junk_eq, xSubStep.junk_eq]
    have hb1 : stateRemC T % 2 ≤ 1 := Nat.le_of_lt_succ (by omega)
    have hb2 : stateRemC T / 2 % 2 ≤ 1 := Nat.le_of_lt_succ (by omega)
    exact selectFn.le_one
      (selectFn.le_one ih (le_refl 1)
        (selectFn.le_one hb1 (emptyInterDec.le_one P₀ _) (IsComputableDiff.emptyDiffDec
    .le_one P₀ hDiff0 _)))
      (le_refl 1)
      (selectFn.le_one hb2 (emptyInterDec.le_one P₁ _) (IsComputableDiff.emptyDiffDec.
    le_one P₁ hDiff1 _))

end atomPairJunk

section AtomPairCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)

noncomputable def atomPairIdx0 (n k : ℕ) : ℕ :=
  stateIdx0 (stateInnerC (atomPairCodeState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
    (Nat.pair k n)))
```

```
noncomputable def atomPairIdx1 (n k : ℕ) : ℕ :=
  stateIdx1 (stateInnerC (atomPairCodeState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
    (Nat.pair k n)))

end AtomPairCode

namespace atomPairJunk
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)

theorem mono {n k : ℕ}
    (h : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k = 1) :
    atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY (n + 1) k = 1 := by
  have hle := atomPairJunk.le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY k (
    n + 1)
  by_contra hne
  have h0 : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY (n + 1) k =
    0 := by
    omega
  have := atomPairJunk.eq_zero_of_succ (h := h0)
  omega

end atomPairJunk

end DomainTheory.NeighbourhoodSystems
```

yPseqAtomJunk.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableUnion

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section YPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
```

```
    _1 splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    _0 splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hUnion0 : IsComputableUnion P₀)

noncomputable def yPseqAtomState (n i bx : ℕ) : ℕ :=
  ySubStep P₀ P₁ hDiff1 splitY hSplitY (Nat.pair n (Nat.pair 1
    (xSubStep P₀ P₁ hDiff0 splitX hSplitX (Nat.pair n (Nat.pair bx
      (packState2 (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
        (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
        (atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)))))))

end YPseqCode

section YPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    _1 splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    _0 splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hUnion0 : IsComputableUnion P₀)

noncomputable def yPseqAtomJunk (n i bx : ℕ) : ℕ :=
  stateJunk (yPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i bx)

end YPseqCode

namespace yPseqAtomJunk
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section YPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    _1 splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    _0 splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hUnion0 : IsComputableUnion P₀)

theorem le_one {bx : ℕ} (hbx : bx ≤ 1) (n i : ℕ) :
    yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i bx ≤ 1 := by
  unfold yPseqAtomJunk yPseqAtomState
  rw [ySubStep.junk_eq, selectFn_one]
  refine selectFn.le_one ?_ (le_refl 1) (emptyInterDec.le_one P₁ _)
  rw [xSubStep.junk_eq, stateJunk_packState2]
  exact selectFn.le_one (atomPairJunk.le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY i n)
    (le_refl 1) (selectFn.le_one hbx (emptyInterDec.le_one P₀ _) (IsComputableDiff.
```

```
    emptyDiffDec.le_one P₀ hDiff0 _))

theorem zero_or_one {bx : ℕ} (hbx : bx ≤ 1) (n i : ℕ) :
    yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i bx = 0 ∨
      yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i bx = 1 := by
  have := yPseqAtomJunk.le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hbx n
    i
  omega

end YPseqCode

end yPseqAtomJunk

end DomainTheory.NeighbourhoodSystems
```

yPseqAtomIdx.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableUnion

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section YPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hUnion0 : IsComputableUnion P₀)

noncomputable def yPseqAtomIdx (n i bx : ℕ) : ℕ :=
  stateIdx0 (yPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i bx)

end YPseqCode

namespace yPseqAtomIdx
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section YPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
```

```
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hUnion0 : IsComputableUnion P₀)

theorem mem (n i bx : ℕ) :
    D₀.mem (P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i bx
    )) :=
  P₀.mem_X _

end YPseqCode

end yPseqAtomIdx

end DomainTheory.NeighbourhoodSystems
```

xPseqAtomJunk.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableUnion

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section XPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hUnion1 : IsComputableUnion P₁)

noncomputable def xPseqAtomState (n i : ℕ) : ℕ :=
  xSubStep P₀ P₁ hDiff0 splitX hSplitX (Nat.pair n (Nat.pair 1
    (packState2 (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
      (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
      (atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i))))

end XPseqCode

section XPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
```

```
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hUnion1 : IsComputableUnion P₁)

noncomputable def xPseqAtomJunk (n i : ℕ) : ℕ :=
  stateJunk (xPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)

end XPseqCode

namespace xPseqAtomJunk
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section XPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hUnion1 : IsComputableUnion P₁)

theorem eq (n i : ℕ) :
    xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i =
      selectFn (atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) 1
        (emptyInterDec P₀ (Nat.pair
          (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) n)) :=
    by
  unfold xPseqAtomJunk xPseqAtomState
  rw [xSubStep.junk_eq, stateIdx0_packState2, stateJunk_packState2, selectFn_one]

theorem le_one (n i : ℕ) :
    xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i ≤ 1 := by
  rw [xPseqAtomJunk.eq]
  exact selectFn.le_one (atomPairJunk.le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY i n)
    (le_refl 1) (emptyInterDec.le_one P₀ _)

theorem zero_or_one (n i : ℕ) :
    xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 0 ∨
      xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 1 := by
  have := xPseqAtomJunk.le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
  omega

end XPseqCode

end xPseqAtomJunk

end DomainTheory.NeighbourhoodSystems
```

xPseqAtomIdx.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableUnion

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section XPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hUnion1 : IsComputableUnion P₁)

noncomputable def xPseqAtomIdx (n i : ℕ) : ℕ :=
  stateIdx1 (xPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)

end XPseqCode

namespace xPseqAtomIdx
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section XPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hUnion1 : IsComputableUnion P₁)

theorem mem (n i : ℕ) :
    D₁.mem (P₁.X (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i))
    :=
  P₁.mem_X _

theorem eq {n i : ℕ}
    (h : xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 0) :
    xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i =
      hSplitX.posIdx (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n
    i)
```

```
        (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) n := by
  have h' : stateJunk (xSubStep P₀ P₁ hDiff0 splitX hSplitX (Nat.pair n (Nat.pair 1
      (packState2 (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
        (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
        (atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i))))) = 0 :=
    h
  rw [xSubStep.junk_eq] at h'
  unfold xPseqAtomIdx xPseqAtomState
  rw [xSubStep.idx1_eq (h := h'), stateIdx0_packState2, stateIdx1_packState2,
    selectFn_one]

end XPseqCode

end xPseqAtomIdx

end DomainTheory.NeighbourhoodSystems
```

XFold.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomIdx
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableUnion
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomPairG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.deltaPair

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section XPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hUnion1 : IsComputableUnion P₁)

noncomputable def XFoldStep (w : ℕ) : ℕ :=
  let n := w.unpair.1
  let i := w.unpair.2.unpair.1
  let acc := w.unpair.2.unpair.2
  selectFn (xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) acc
    (selectFn acc.unpair.1
      (Nat.pair 1 (hUnion1.unionIdx acc.unpair.2
        (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)))
```

```
      (Nat.pair 1 (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i))
    )

theorem XFoldStep_eq (n i acc : ℕ) :
    XFoldStep P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1
        (Nat.pair n (Nat.pair i acc)) =
      selectFn (xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
    acc
        (selectFn acc.unpair.1
          (Nat.pair 1 (hUnion1.unionIdx acc.unpair.2
            (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)))
          (Nat.pair 1 (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n
     i))) := by
  unfold XFoldStep
  simp only [unpair_pair_fst, unpair_pair_snd]

end XPseqCode

section XPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hUnion1 : IsComputableUnion P₁)

noncomputable def XFold (n N : ℕ) : ℕ :=
  N.rec (Nat.pair 0 0) (fun i acc => XFoldStep P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
    hUnion1 (Nat.pair n (Nat.pair i acc)))

end XPseqCode

namespace XFold
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section XPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hUnion1 : IsComputableUnion P₁)

theorem succ (n N : ℕ) :
    XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n (N + 1) =
      XFoldStep P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1
        (Nat.pair n (Nat.pair N (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
```

```
    hSplitY hUnion1
          n N))) := rfl

theorem zero (n : ℕ) : XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1
    n 0 =
    Nat.pair 0 0 := rfl

theorem found_le_one (n : ℕ) :
    ∀ N, (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).unpair.1
     ≤ 1 := by
  intro N
  induction N with
  | zero => simp [XFold.zero]
  | succ N ih =>
    rw [XFold.succ, XFoldStep_eq]
    rcases xPseqAtomJunk.zero_or_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    n N with
      h0 | h1
    · rw [h0, selectFn_zero]
      rcases Nat.eq_zero_or_pos
          (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).unpair
    .1 with
        hf0 | hfpos
      · rw [show (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).
    unpair.1
          = 0 from hf0, selectFn_zero, unpair_pair_fst]
      · rw [show (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).
    unpair.1
          = 1 from by omega, selectFn_one, unpair_pair_fst]
    · rw [h1, selectFn_one]; exact ih

theorem found_iff (n : ℕ) :
    ∀ N, (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).unpair.1
     = 1 ↔
      ∃ i < N, xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 0
    := by
  intro N
  induction N with
  | zero => simp [XFold.zero]
  | succ N ih =>
    rw [XFold.succ, XFoldStep_eq]
    rcases xPseqAtomJunk.zero_or_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    n N with
      h0 | h1
    · rw [h0, selectFn_zero]
      have hval1 : (selectFn
          (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).unpair
    .1
          (Nat.pair 1 (hUnion1.unionIdx
            (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).
    unpair.2
            (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n N)))
          (Nat.pair 1 (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n
     N))
          ).unpair.1 = 1 := by
        have hle := XFold.found_le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
```

```
    hSplitY hUnion1 n N
        rcases Nat.eq_zero_or_pos
            (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).
    unpair.1 with
          hf | hf
        · rw [show (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N
    ).unpair.1
            = 0 from hf, selectFn_zero, unpair_pair_fst]
        · rw [show (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N
    ).unpair.1
            = 1 from by omega, selectFn_one, unpair_pair_fst]
      rw [hval1]
      exact ⟨fun _ => ⟨N, Nat.lt_succ_self N, h0⟩, fun _ => rfl⟩
    · rw [h1, selectFn_one, ih]
      constructor
      · rintro ⟨i, hi, hie⟩; exact ⟨i, Nat.lt_succ_of_lt hi, hie⟩
      · rintro ⟨i, hi, hie⟩
        rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
        · exact ⟨i, hi', hie⟩
        · exact absurd hie (by omega)

end XPseqCode

section XPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hUnion1 : IsComputableUnion P₁)

include hD₁pos hD₁diff hD₁nomin in

theorem mem_of_found (n : ℕ) :
    ∀ N, (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).unpair.1
     = 1 →
      D₁.mem (P₁.X (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N
    ).unpair.2) := by
  intro N
  induction N with
  | zero => intro h; simp [XFold.zero] at h
  | succ N ih =>
    intro hfound1
    rw [XFold.succ, XFoldStep_eq] at hfound1 ⊢
    rcases xPseqAtomJunk.zero_or_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    n N with
      h0 | h1
    · rw [h0, selectFn_zero] at hfound1 ⊢
      have hle := XFold.found_le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion1 n N
      rcases Nat.eq_zero_or_pos
          (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).unpair
```

```
    .1 with
        hf0 | hfpos
      · rw [show (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).
    unpair.1
          = 0 from hf0, selectFn_zero, unpair_pair_snd]
        exact xPseqAtomIdx.mem P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n N
      · have hf1 : (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N
    ).unpair.1
            = 1 := by omega
        rw [hf1, selectFn_one, unpair_pair_snd]
        have hprevmem := ih hf1
        have hnewmem := xPseqAtomIdx.mem P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY n N
        have hex : ∃ k, P₁.X k =
            P₁.X (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).
    unpair.2 ∪
              P₁.X (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n N)
     :=
          P₁.surj (NeighborhoodSystem.mem_union_of_mem hD₁pos hD₁diff hD₁nomin hprevmem
     hnewmem)
        rw [hUnion1.unionIdx_spec hex]
        exact NeighborhoodSystem.mem_union_of_mem hD₁pos hD₁diff hD₁nomin hprevmem
    hnewmem
    · rw [h1, selectFn_one] at hfound1 ⊢
      exact ih hfound1

end XPseqCode

section XPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hUnion1 : IsComputableUnion P₁)

include hD₁pos hD₁diff hD₁nomin in

theorem mem_iff (n : ℕ) :
    ∀ N, (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).unpair.1
     = 1 →
      ∀ z : β, z ∈ P₁.X (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion1 n N).unpair.2 ↔
        ∃ i < N, xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i =
    0 ∧
          z ∈ P₁.X (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
     := by
  intro N
  induction N with
  | zero => intro h; simp [XFold.zero] at h
  | succ N ih =>
    intro hfound1 z
```

```
rw [XFold.succ, XFoldStep_eq] at hfound1 ⊢
rcases xPseqAtomJunk.zero_or_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
n N with
  h0 | h1
· rw [h0, selectFn_zero] at hfound1 ⊢
  have hle := XFold.found_le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
hUnion1 n N
  rcases Nat.eq_zero_or_pos
      (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).unpair
.1 with
    hf0 | hfpos
  · rw [show (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).
unpair.1
      = 0 from hf0, selectFn_zero, unpair_pair_snd]
    constructor
    · intro hz; exact ⟨N, Nat.lt_succ_self N, h0, hz⟩
    · rintro ⟨i, hi, hie, hz⟩
      rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
      · exact absurd ((XFold.found_iff P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
hSplitY
          hUnion1 n N).mpr ⟨i, hi', hie⟩) (by rw [hf0]; omega)
      · exact hz
  · have hf1 : (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N
).unpair.1
        = 1 := by omega
    rw [hf1, selectFn_one, unpair_pair_snd]
    have hprevmem := XFold.mem_of_found P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
hSplitY
      hD₁pos hD₁diff hD₁nomin hUnion1 n N hf1
    have hnewmem := xPseqAtomIdx.mem P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
hSplitY n N
    have hex : ∃ k, P₁.X k =
        P₁.X (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n N).
unpair.2 ∪
          P₁.X (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n N)
 :=
      P₁.surj (NeighborhoodSystem.mem_union_of_mem hD₁pos hD₁diff hD₁nomin hprevmem
 hnewmem)
    rw [hUnion1.unionIdx_spec hex, Set.mem_union, ih hf1 z]
    constructor
    · rintro (⟨i, hi, hie, hz⟩ | hz)
      · exact ⟨i, Nat.lt_succ_of_lt hi, hie, hz⟩
      · exact ⟨N, Nat.lt_succ_self N, h0, hz⟩
    · rintro ⟨i, hi, hie, hz⟩
      rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
      · exact Or.inl ⟨i, hi', hie, hz⟩
      · exact Or.inr hz
· rw [h1, selectFn_one] at hfound1 ⊢
  rw [ih hfound1 z]
  constructor
  · rintro ⟨i, hi, hie, hz⟩; exact ⟨i, Nat.lt_succ_of_lt hi, hie, hz⟩
  · rintro ⟨i, hi, hie, hz⟩
    rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
    · exact ⟨i, hi', hie, hz⟩
    · exact absurd hie (by omega)
```

```
end XPseqCode

end XFold

end DomainTheory.NeighbourhoodSystems
```

XPseqCode.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XFold
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableUnion

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section XPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hUnion1 : IsComputableUnion P₁)

noncomputable def XPseqCode (n : ℕ) : ℕ :=
  (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n (4 ^ n)).unpair.2

end XPseqCode

namespace XPseqCode
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section XPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hUnion1 : IsComputableUnion P₁)

include hD₁pos hD₁diff hD₁nomin in

theorem mem {n : ℕ}
    (hfound : (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n (4 ^ n
```

```
    )).unpair.1
      = 1) :
    D₁.mem (P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n
    )) :=
  XFold.mem_of_found P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₁pos hD₁diff
    hD₁nomin
    hUnion1 n (4 ^ n) hfound

end XPseqCode

end XPseqCode

end DomainTheory.NeighbourhoodSystems
```

YFoldInner.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomIdx
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableUnion

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section YPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hUnion0 : IsComputableUnion P₀)

noncomputable def YFoldStep (w : ℕ) : ℕ :=
  let n := w.unpair.1.unpair.1
  let bx := w.unpair.1.unpair.2
  let i := w.unpair.2.unpair.1
  let acc := w.unpair.2.unpair.2
  selectFn (yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i bx) acc
    (selectFn acc.unpair.1
      (Nat.pair 1 (hUnion0.unionIdx acc.unpair.2
        (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i bx)))
      (Nat.pair 1 (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
    bx)))

noncomputable def YFoldInnerPair (nb N : ℕ) : ℕ :=
```

```
  N.rec (Nat.pair 0 0) (fun i acc => YFoldStep P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
    hUnion0 (Nat.pair nb (Nat.pair i acc)))

theorem YFoldStep_eq (n bx i acc : ℕ) :
    YFoldStep P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
        (Nat.pair (Nat.pair n bx) (Nat.pair i acc)) =
      selectFn (yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i bx)
     acc
        (selectFn acc.unpair.1
          (Nat.pair 1 (hUnion0.unionIdx acc.unpair.2
            (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i bx)))
          (Nat.pair 1 (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n
     i bx))) := by
  unfold YFoldStep
  simp only [unpair_pair_fst, unpair_pair_snd]

end YPseqCode

section YPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hUnion0 : IsComputableUnion P₀)

noncomputable def YFoldInner (n bx N : ℕ) : ℕ :=
  N.rec (Nat.pair 0 0) (fun i acc => YFoldStep P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
    hUnion0 (Nat.pair (Nat.pair n bx) (Nat.pair i acc)))

end YPseqCode

namespace YFoldInner
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section YPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hUnion0 : IsComputableUnion P₀)

theorem eq_pair (n bx N : ℕ) :
    YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n bx N =
      YFoldInnerPair P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
```

```
        (Nat.pair n bx) N := rfl

theorem succ (n bx N : ℕ) :
    YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n bx (N + 1) =
      YFoldStep P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
        (Nat.pair (Nat.pair n bx) (Nat.pair N (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX
          splitY hSplitY hUnion0 n bx N))) := rfl

theorem zero (n bx : ℕ) :
    YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n bx 0 =
      Nat.pair 0 0 := rfl

theorem found_le_one {bx : ℕ} (hbx : bx ≤ 1) (n : ℕ) :
    ∀ N, (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n bx N).
    unpair.1
      ≤ 1 := by
  intro N
  induction N with
  | zero => simp [YFoldInner.zero]
  | succ N ih =>
    rw [YFoldInner.succ, YFoldStep_eq]
    rcases yPseqAtomJunk.zero_or_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hbx n N with
      h0 | h1
    · rw [h0, selectFn_zero]
      rcases Nat.eq_zero_or_pos
          (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n bx N)
    .unpair.1
        with hf0 | hfpos
      · rw [show (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
    n bx N
          ).unpair.1 = 0 from hf0, selectFn_zero, unpair_pair_fst]
      · rw [show (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
    n bx N
          ).unpair.1 = 1 from by omega, selectFn_one, unpair_pair_fst]
    · rw [h1, selectFn_one]; exact ih

theorem found_iff {bx : ℕ} (hbx : bx ≤ 1) (n : ℕ) :
    ∀ N, (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n bx N).
    unpair.1 = 1
      ↔ ∃ i < N, yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
    bx = 0 := by
  intro N
  induction N with
  | zero => simp [YFoldInner.zero]
  | succ N ih =>
    rw [YFoldInner.succ, YFoldStep_eq]
    rcases yPseqAtomJunk.zero_or_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hbx n N with
      h0 | h1
    · rw [h0, selectFn_zero]
      have hval1 : (selectFn
          (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n bx N)
    .unpair.1
          (Nat.pair 1 (hUnion0.unionIdx
```

```
          (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n bx
    N).unpair.2
          (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n N bx)))
        (Nat.pair 1 (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n
     N bx))
        ).unpair.1 = 1 := by
      have hle := YFoldInner.found_le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
        hUnion0 hbx n N
      rcases Nat.eq_zero_or_pos
          (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n bx
    N).unpair.1
        with hf | hf
      · rw [show (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0 n bx N
          ).unpair.1 = 0 from hf, selectFn_zero, unpair_pair_fst]
      · rw [show (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0 n bx N
          ).unpair.1 = 1 from by omega, selectFn_one, unpair_pair_fst]
        rw [hval1]
        exact ⟨fun _ => ⟨N, Nat.lt_succ_self N, h0⟩, fun _ => rfl⟩
    · rw [h1, selectFn_one, ih]
      constructor
      · rintro ⟨i, hi, hie⟩; exact ⟨i, Nat.lt_succ_of_lt hi, hie⟩
      · rintro ⟨i, hi, hie⟩
        rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
        · exact ⟨i, hi', hie⟩
        · exact absurd hie (by omega)

end YPseqCode

section YPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hUnion0 : IsComputableUnion P₀)

include hD₀pos hD₀diff hD₀nomin in

theorem mem_of_found {bx : ℕ} (hbx : bx ≤ 1) (n : ℕ) :
    ∀ N, (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n bx N).
    unpair.1 = 1
      → D₀.mem (P₀.X (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0
        n bx N).unpair.2) := by
  intro N
  induction N with
  | zero => intro h; simp [YFoldInner.zero] at h
  | succ N ih =>
    intro hfound1
```

```
    rw [YFoldInner.succ, YFoldStep_eq] at hfound1 ⊢
    rcases yPseqAtomJunk.zero_or_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hbx n N with
      h0 | h1
    · rw [h0, selectFn_zero] at hfound1 ⊢
      have hle := YFoldInner.found_le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hUnion0
        hbx n N
      rcases Nat.eq_zero_or_pos
          (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n bx N)
    .unpair.1
        with hf0 | hfpos
      · rw [show (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
    n bx N
        ).unpair.1 = 0 from hf0, selectFn_zero, unpair_pair_snd]
        exact yPseqAtomIdx.mem P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n N bx
      · have hf1 : (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0 n bx N
          ).unpair.1 = 1 := by omega
        rw [hf1, selectFn_one, unpair_pair_snd]
        have hprevmem := ih hf1
        have hnewmem := yPseqAtomIdx.mem P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY n N bx
        have hex : ∃ k, P₀.X k =
            P₀.X (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
    n bx N
              ).unpair.2 ∪
              P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n N
    bx) :=
          P₀.surj (NeighborhoodSystem.mem_union_of_mem hD₀pos hD₀diff hD₀nomin hprevmem
     hnewmem)
        rw [hUnion0.unionIdx_spec hex]
        exact NeighborhoodSystem.mem_union_of_mem hD₀pos hD₀diff hD₀nomin hprevmem
    hnewmem
    · rw [h1, selectFn_one] at hfound1 ⊢
      exact ih hfound1

end YPseqCode

section YPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hUnion0 : IsComputableUnion P₀)

include hD₀pos hD₀diff hD₀nomin in

theorem mem_iff {bx : ℕ} (hbx : bx ≤ 1) (n : ℕ) :
    ∀ N, (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n bx N).
    unpair.1 = 1
```

```
    → ∀ z : α, z ∈ P₀.X (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
  hSplitY hUnion0
        n bx N).unpair.2 ↔
      ∃ i < N, yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i bx
   = 0 ∧
        z ∈ P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
  bx) := by
intro N
induction N with
| zero => intro h; simp [YFoldInner.zero] at h
| succ N ih =>
  intro hfound1 z
  rw [YFoldInner.succ, YFoldStep_eq] at hfound1 ⊢
  rcases yPseqAtomJunk.zero_or_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
  hbx n N with
    h0 | h1
  · rw [h0, selectFn_zero] at hfound1 ⊢
    have hle := YFoldInner.found_le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
  hSplitY hUnion0
      hbx n N
    rcases Nat.eq_zero_or_pos
        (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n bx N)
  .unpair.1
      with hf0 | hfpos
    · rw [show (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
  n bx N
        ).unpair.1 = 0 from hf0, selectFn_zero, unpair_pair_snd]
      constructor
      · intro hz; exact ⟨N, Nat.lt_succ_self N, h0, hz⟩
      · rintro ⟨i, hi, hie, hz⟩
        rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
        · exact absurd ((YFoldInner.found_iff P₀ P₁ hDiff0 hDiff1 splitX hSplitX
  splitY hSplitY
            hUnion0 hbx n N).mpr ⟨i, hi', hie⟩) (by rw [hf0]; omega)
        · exact hz
    · have hf1 : (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
  hUnion0 n bx N
          ).unpair.1 = 1 := by omega
      rw [hf1, selectFn_one, unpair_pair_snd]
      have hprevmem := YFoldInner.mem_of_found P₀ P₁ hDiff0 hDiff1 splitX hSplitX
  splitY hSplitY
        hD₀pos hD₀diff hD₀nomin hUnion0 hbx n N hf1
      have hnewmem := yPseqAtomIdx.mem P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
  hSplitY n N bx
      have hex : ∃ k, P₀.X k =
          P₀.X (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
  n bx N
            ).unpair.2 ∪
            P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n N
  bx) :=
        P₀.surj (NeighborhoodSystem.mem_union_of_mem hD₀pos hD₀diff hD₀nomin hprevmem
   hnewmem)
      rw [hUnion0.unionIdx_spec hex, Set.mem_union, ih hf1 z]
      constructor
      · rintro (⟨i, hi, hie, hz⟩ | hz)
        · exact ⟨i, Nat.lt_succ_of_lt hi, hie, hz⟩
```

```
          · exact ⟨N, Nat.lt_succ_self N, h0, hz⟩
        · rintro ⟨i, hi, hie, hz⟩
          rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
          · exact Or.inl ⟨i, hi', hie, hz⟩
          · exact Or.inr hz
    · rw [h1, selectFn_one] at hfound1 ⊢
      rw [ih hfound1 z]
      constructor
      · rintro ⟨i, hi, hie, hz⟩; exact ⟨i, Nat.lt_succ_of_lt hi, hie, hz⟩
      · rintro ⟨i, hi, hie, hz⟩
        rcases Nat.lt_succ_iff_lt_or_eq.mp hi with hi' | rfl
        · exact ⟨i, hi', hie, hz⟩
        · exact absurd hie (by omega)

end YPseqCode

end YFoldInner

end DomainTheory.NeighbourhoodSystems
```

YPseqCode.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    YFoldInner
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableUnion

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section YPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hUnion0 : IsComputableUnion P₀)

noncomputable def YPseqCode (n : ℕ) : ℕ :=
  (IsComputableUnion.combineFound2 hUnion0
    (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n 0 (4 ^ n))
    (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n 1 (4 ^ n)))
    .unpair.2

end YPseqCode

namespace YPseqCode
```

```
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section YPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hUnion0 : IsComputableUnion P₀)

include hD₀pos hD₀diff hD₀nomin in

theorem mem {n : ℕ}
    (hfound : (IsComputableUnion.combineFound2 hUnion0
      (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n 0 (4 ^ n)
    )
      (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n 1 (4 ^ n)
    )
      ).unpair.1 = 1) :
    D₀.mem (P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n
    )) :=
  IsComputableUnion.combineFound2.mem_of_found hD₀pos hD₀diff hD₀nomin hUnion0
    (YFoldInner.found_le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
      (Nat.zero_le 1) n (4 ^ n))
    (YFoldInner.found_le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
      (le_refl 1) n (4 ^ n))
    (YFoldInner.mem_of_found P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos
    hD₀diff
      hD₀nomin hUnion0 (Nat.zero_le 1) n (4 ^ n))
    (YFoldInner.mem_of_found P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos
    hD₀diff
      hD₀nomin hUnion0 (le_refl 1) n (4 ^ n))
    hfound

end YPseqCode

end YPseqCode

end DomainTheory.NeighbourhoodSystems
```

effectiveIso812d_early.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    domainIso812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomE
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.deltaPair
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.xStepG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.yStepG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomPairG
```

```
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairG_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairCodeState
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomIdx
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XFold
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    YFoldInner
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XPseqCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.YPseqCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomIdx
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableDiff
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableSplit
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableUnion
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    ComputableBisection
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

namespace stateRemC
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)

theorem atomPairCodeState (k n : ℕ) :
    stateRemC (_root_.DomainTheory.NeighbourhoodSystems.atomPairCodeState P₀ P₁ hDiff0
    hDiff1 splitX hSplitX splitY hSplitY
      (Nat.pair k n)) = k / 4 ^ n := by
  induction n with
```

```
  | zero => simp [_root_.DomainTheory.NeighbourhoodSystems.atomPairCodeState,
    atomPairBase]
  | succ n ih =>
    rw [atomPairCodeState.succ]
    unfold atomPairStep pcN pcT xwB1 xwS
    simp only [unpair_pair_fst, unpair_pair_snd, stateRemC.packStateC, ih,
      Nat.div_div_eq_div_mul, ← pow_succ]

end stateRemC
namespace atomPairCodeState
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in

theorem correct (k n : ℕ)
    (hjunk : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k = 0) :
    P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k) =
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair k) n).1 ∧
      P₁.X (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k) =
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair k) n).2 := by
  induction n with
  | zero =>
    unfold atomPairIdx0 atomPairIdx1
    simp [atomPairCodeState, atomPairBase, stateBase2]
    exact ⟨P₀.masterIdx_spec, P₁.masterIdx_spec⟩
  | succ n ih =>
    have hjunk_n := atomPairJunk.eq_zero_of_succ (h := hjunk)
    obtain ⟨hidx0, hidx1⟩ := ih hjunk_n
    unfold atomPairJunk at hjunk
    unfold atomPairIdx0 at hidx0
    unfold atomPairIdx1 at hidx1
    unfold atomPairIdx0 atomPairIdx1
    rw [atomPairCodeState.succ] at hjunk ⊢
    unfold atomPairStep pcN pcT xwB1 xwS at hjunk ⊢
    simp only [unpair_pair_fst, unpair_pair_snd, stateInnerC_packStateC] at hjunk
    hidx0 hidx1 ⊢
    set T := atomPairCodeState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY (Nat.
    pair k n)
      with hTdef
    have hrem : stateRemC T = k / 4 ^ n := stateRemC.atomPairCodeState P₀ P₁ hDiff0
    hDiff1
      splitX hSplitX splitY hSplitY k n
    have hb1 : stateRemC T % 2 = if (deltaPair k n).1 then 1 else 0 := by
```

```
      rw [hrem]
      rcases Nat.mod_two_eq_zero_or_one (k / 4 ^ n) with h0 | h1
      · have h? : (deltaPair k n).1 = false := by unfold deltaPair; simp [h0]
        simp [h?, h0]
      · have h? : (deltaPair k n).1 = true := by unfold deltaPair; simp [h1]
        simp [h?, h1]
    have hb2 : stateRemC T / 2 % 2 = if (deltaPair k n).2 then 1 else 0 := by
      rw [hrem]
      rcases Nat.mod_two_eq_zero_or_one (k / 4 ^ n / 2) with h0 | h1
      · have h? : (deltaPair k n).2 = false := by unfold deltaPair; simp [h0]
        simp [h?, h0]
      · have h? : (deltaPair k n).2 = true := by unfold deltaPair; simp [h1]
        simp [h?, h1]
    rw [hb1] at hjunk ⊢
    rw [hb2] at hjunk ⊢
    have hxjunk : stateJunk (xSubStep P₀ P₁ hDiff0 splitX hSplitX
        (Nat.pair n (Nat.pair (if (deltaPair k n).1 then 1 else 0) (stateInnerC T))))
    = 0 := by
      have hj2 := hjunk
      rw [ySubStep.junk_eq] at hj2
      exact junk_eq_zero_of_selectFn_eq_zero hj2
    obtain ⟨hAB, -, hBmem⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit hD
    ₁pos hD₁diff
      splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair k) n
    obtain ⟨hx0, hx1⟩ := xSubStep.correct P₀ P₁ hDiff0 splitX hSplitX hD₀pos hD₀diff hD₀
    nomin
      hxSplit hidx0 hidx1 hAB hBmem (deltaPair k n).1 hxjunk
    have hxspec := xStepG.spec D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos hD₁diff splitX
     hxSplit
      P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair k) n
    rw [atomPairG.succ_eq]
    exact ySubStep.correct P₀ P₁ hDiff1 splitY hSplitY hD₁pos hD₁diff hD₁nomin hySplit
    hx0 hx1
      hxspec.1 hxspec.2 (deltaPair k n).2 hjunk

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in

theorem disjoint {n k k' : ℕ}
    (hk : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k = 0)
    (hk' : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k' = 0)
    (hne : ∃ i < n, deltaPair k i = deltaPair k' i) :
    P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k) ∩
        P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k') = ∅
    ∧
      P₁.X (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k) ∩
        P₁.X (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k') = ∅
    := by
  obtain ⟨h0, h1⟩ := atomPairCodeState.correct P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
     hSplitY
    hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne k n hk
  obtain ⟨h0', h1'⟩ := atomPairCodeState.correct P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
    hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne k' n
    hk'
  rw [h0, h0', h1, h1']
  exact atomPairG.disjoint D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos hD₁diff splitX
```

```
    hxSplit
    P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair k) (deltaPair k') n hne

end atomPairCodeState
namespace atomPairG
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in

theorem fst_eq_empty_of_junk_eq_one (i : ℕ) : ∀ n,
    atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 1 →
      (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1 = ∅ := by
  intro n
  induction n with
  | zero =>
    intro h
    exfalso
    have h0 : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 i = 0 :=
     by
      simp [atomPairJunk, atomPairCodeState, atomPairBase, stateBase2]
    omega
  | succ n ih =>
    intro hjunk1
    rcases Nat.eq_zero_or_pos (atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY n i)
      with hn0 | hnpos
    .
      obtain ⟨hidx0, hidx1⟩ := atomPairCodeState.correct P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY
        hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne
    hD₁mne i n
        hn0
      unfold atomPairJunk at hjunk1 hn0
      unfold atomPairIdx0 at hidx0
      unfold atomPairIdx1 at hidx1
      rw [atomPairCodeState.succ] at hjunk1
      unfold atomPairStep pcN pcT xwB1 xwS at hjunk1
      simp only [unpair_pair_fst, unpair_pair_snd, stateInnerC_packStateC] at hjunk1
    hidx0 hidx1
      set T := atomPairCodeState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY (Nat
    .pair i n)
        with hTdef
      have hrem : stateRemC T = i / 4 ^ n :=
```

```
    stateRemC.atomPairCodeState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY i
 n
  have hb1 : stateRemC T % 2 = if (deltaPair i n).1 then 1 else 0 := by
    rw [hrem]
    rcases Nat.mod_two_eq_zero_or_one (i / 4 ^ n) with h0 | h1
    · have h? : (deltaPair i n).1 = false := by unfold deltaPair; simp [h0]
      simp [h?, h0]
    · have h? : (deltaPair i n).1 = true := by unfold deltaPair; simp [h1]
      simp [h?, h1]
  have hb2 : stateRemC T / 2 % 2 = if (deltaPair i n).2 then 1 else 0 := by
    rw [hrem]
    rcases Nat.mod_two_eq_zero_or_one (i / 4 ^ n / 2) with h0 | h1
    · have h? : (deltaPair i n).2 = false := by unfold deltaPair; simp [h0]
      simp [h?, h0]
    · have h? : (deltaPair i n).2 = true := by unfold deltaPair; simp [h1]
      simp [h?, h1]
  rw [hb1, hb2] at hjunk1
  rw [ySubStep.junk_eq] at hjunk1
  rw [xSubStep.junk_eq, hn0, selectFn_zero] at hjunk1
  have hb1le : (if (deltaPair i n).1 then (1 : ℕ) else 0) ≤ 1 := by
    rcases Bool.eq_false_or_eq_true (deltaPair i n).1 with h | h <;> simp [h]
  have hxle : selectFn (if (deltaPair i n).1 then 1 else 0)
      (emptyInterDec P₀ (Nat.pair (stateIdx0 (stateInnerC T)) n))
      (IsComputableDiff.emptyDiffDec P₀ hDiff0 (Nat.pair (stateIdx0 (stateInnerC T)
) n)) ≤ 1 :=
    selectFn.le_one hb1le (emptyInterDec.le_one P₀ _) (IsComputableDiff.
emptyDiffDec.le_one P₀ hDiff0 _)
  rcases Nat.eq_zero_or_pos (selectFn (if (deltaPair i n).1 then 1 else 0)
      (emptyInterDec P₀ (Nat.pair (stateIdx0 (stateInnerC T)) n))
      (IsComputableDiff.emptyDiffDec P₀ hDiff0 (Nat.pair (stateIdx0 (stateInnerC T)
) n))) with hx0 | hxpos
  ·
    rw [hx0, selectFn_zero] at hjunk1
    have hxnonjunk : stateJunk (xSubStep P₀ P₁ hDiff0 splitX hSplitX
        (Nat.pair n (Nat.pair (if (deltaPair i n).1 then 1 else 0) (stateInnerC T)
))) = 0 := by
      rw [xSubStep.junk_eq, hn0, selectFn_zero]; exact hx0
    obtain ⟨ihAB, -, ihB⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit
 hD₁pos
      hD₁diff splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair i)
 n
    obtain ⟨hxA1, hxB1⟩ := xSubStep.correct P₀ P₁ hDiff0 splitX hSplitX hD₀pos hD₀
diff hD₀nomin
      hxSplit hidx0 hidx1 ihAB ihB (deltaPair i n).1 hxnonjunk
    have hB2 : (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) (n + 1)).2 = ∅
 := by
      rw [atomPairG.succ_eq]
      by_cases h?2 : (deltaPair i n).2 = true
      · simp only [h?2, ite_true] at hjunk1
        rw [selectFn_one] at hjunk1
        have hBe := (emptyInterDec.eq_one_iff P₁ hD₁pos hD₁nomin _ _).mp hjunk1
        rw [hxB1] at hBe
        simp only [yStepG, xyStep, Prod.swap, h?2, ite_true]
        exact hBe
      · simp only [h?2, Bool.false_eq_true, ite_false] at hjunk1
        rw [selectFn_zero] at hjunk1
```

```
          have hBe := (IsComputableDiff.emptyDiffDec.eq_one_iff P₁ hDiff1 hD₁diff hD₁
    nomin _ _).mp hjunk1
          rw [hxB1] at hBe
          simp only [yStepG, xyStep, Prod.swap, h?2, Bool.false_eq_true, ite_false]
          exact hBe
        exact (atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos hD₁diff
    splitX
          hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair i) (n + 1)).1.mpr
     hB2
      ·
        have hx1 : selectFn (if (deltaPair i n).1 then 1 else 0)
            (emptyInterDec P₀ (Nat.pair (stateIdx0 (stateInnerC T)) n))
            (IsComputableDiff.emptyDiffDec P₀ hDiff0 (Nat.pair (stateIdx0 (stateInnerC
    T)) n)) = 1 := by omega
        have hA1eq : (xStepG splitX
            (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1
            (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n)
            (deltaPair i n).1).1 = ∅ := by
          by_cases h?1 : (deltaPair i n).1 = true
          · simp only [xStepG, xyStep, h?1, ite_true] at hx1 ⊢
            rw [selectFn_one] at hx1
            have hAe := (emptyInterDec.eq_one_iff P₀ hD₀pos hD₀nomin _ _).mp hx1
            rw [hidx0] at hAe
            exact hAe
          · simp only [xStepG, xyStep, h?1, Bool.false_eq_true, ite_false] at hx1 ⊢
            rw [selectFn_zero] at hx1
            have hAe := (IsComputableDiff.emptyDiffDec.eq_one_iff P₀ hDiff0 hD₀diff hD₀
    nomin _ _).mp hx1
            rw [hidx0] at hAe
            exact hAe
        obtain ⟨hspecAB, hspecAmem⟩ := xStepG.spec D₀ D₁ hD₀pos hD₀diff splitY hySplit
    hD₁pos
          hD₁diff splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair i)
     n
        rw [atomPairG.succ_eq]
        exact Set.subset_eq_empty
          (yStepG.fst_subset hySplit hspecAB hspecAmem (P₁.X n) (deltaPair i n).2)
    hA1eq
    ·
      have hn1 : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 1
     := by
        have := atomPairJunk.le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY i
     n
        omega
      exact Set.subset_eq_empty (atomPairG.fst_subset D₀ D₁ hD₀pos hD₀diff splitY
    hySplit hD₁pos
        hD₁diff splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair i) n
    ) (ih hn1)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in

theorem snd_eq_empty_of_junk_eq_one (i : ℕ) : ∀ n,
    atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 1 →
      (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 = ∅ := by
  intro n
  induction n with
```

```
| zero =>
  intro h
  exfalso
  have h0 : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 i = 0 :=
   by
    simp [atomPairJunk, atomPairCodeState, atomPairBase, stateBase2]
  omega
| succ n ih =>
  intro hjunk1
  rcases Nat.eq_zero_or_pos (atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
  hSplitY n i)
    with hn0 | hnpos
  .
    obtain ⟨hidx0, hidx1⟩ := atomPairCodeState.correct P₀ P₁ hDiff0 hDiff1 splitX
  hSplitX splitY
      hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne
  hD₁mne i n
      hn0
    unfold atomPairJunk at hjunk1 hn0
    unfold atomPairIdx0 at hidx0
    unfold atomPairIdx1 at hidx1
    rw [atomPairCodeState.succ] at hjunk1
    unfold atomPairStep pcN pcT xwB1 xwS at hjunk1
    simp only [unpair_pair_fst, unpair_pair_snd, stateInnerC_packStateC] at hjunk1
  hidx0 hidx1
    set T := atomPairCodeState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY (Nat
  .pair i n)
      with hTdef
    have hrem : stateRemC T = i / 4 ^ n :=
      stateRemC.atomPairCodeState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY i
   n
    have hb1 : stateRemC T % 2 = if (deltaPair i n).1 then 1 else 0 := by
      rw [hrem]
      rcases Nat.mod_two_eq_zero_or_one (i / 4 ^ n) with h0 | h1
      · have h? : (deltaPair i n).1 = false := by unfold deltaPair; simp [h0]
        simp [h?, h0]
      · have h? : (deltaPair i n).1 = true := by unfold deltaPair; simp [h1]
        simp [h?, h1]
    have hb2 : stateRemC T / 2 % 2 = if (deltaPair i n).2 then 1 else 0 := by
      rw [hrem]
      rcases Nat.mod_two_eq_zero_or_one (i / 4 ^ n / 2) with h0 | h1
      · have h? : (deltaPair i n).2 = false := by unfold deltaPair; simp [h0]
        simp [h?, h0]
      · have h? : (deltaPair i n).2 = true := by unfold deltaPair; simp [h1]
        simp [h?, h1]
    rw [hb1, hb2] at hjunk1
    rw [ySubStep.junk_eq] at hjunk1
    rw [xSubStep.junk_eq, hn0, selectFn_zero] at hjunk1
    have hb1le : (if (deltaPair i n).1 then (1 : ℕ) else 0) ≤ 1 := by
      rcases Bool.eq_false_or_eq_true (deltaPair i n).1 with h | h <;> simp [h]
    have hxle : selectFn (if (deltaPair i n).1 then 1 else 0)
        (emptyInterDec P₀ (Nat.pair (stateIdx0 (stateInnerC T)) n))
        (IsComputableDiff.emptyDiffDec P₀ hDiff0 (Nat.pair (stateIdx0 (stateInnerC T)
  ) n)) ≤ 1 :=
      selectFn.le_one hb1le (emptyInterDec.le_one P₀ _) (IsComputableDiff.
  emptyDiffDec.le_one P₀ hDiff0 _)
```

```
  rcases Nat.eq_zero_or_pos (selectFn (if (deltaPair i n).1 then 1 else 0)
      (emptyInterDec P₀ (Nat.pair (stateIdx0 (stateInnerC T)) n))
      (IsComputableDiff.emptyDiffDec P₀ hDiff0 (Nat.pair (stateIdx0 (stateInnerC T)
) n))) with hx0 | hxpos
  ·
    rw [hx0, selectFn_zero] at hjunk1
    have hxnonjunk : stateJunk (xSubStep P₀ P₁ hDiff0 splitX hSplitX
        (Nat.pair n (Nat.pair (if (deltaPair i n).1 then 1 else 0) (stateInnerC T)
))) = 0 := by
      rw [xSubStep.junk_eq, hn0, selectFn_zero]; exact hx0
    obtain ⟨ihAB, -, ihB⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit
 hD₁pos
      hD₁diff splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair i)
 n
    obtain ⟨-, hxB1⟩ := xSubStep.correct P₀ P₁ hDiff0 splitX hSplitX hD₀pos hD₀diff
hD₀nomin
      hxSplit hidx0 hidx1 ihAB ihB (deltaPair i n).1 hxnonjunk
    rw [atomPairG.succ_eq]
    by_cases h?2 : (deltaPair i n).2 = true
    · simp only [h?2, ite_true] at hjunk1
      rw [selectFn_one] at hjunk1
      have hBe := (emptyInterDec.eq_one_iff P₁ hD₁pos hD₁nomin _ _).mp hjunk1
      rw [hxB1] at hBe
      simp only [yStepG, xyStep, Prod.swap, h?2, ite_true]
      exact hBe
    · simp only [h?2, Bool.false_eq_true, ite_false] at hjunk1
      rw [selectFn_zero] at hjunk1
      have hBe := (IsComputableDiff.emptyDiffDec.eq_one_iff P₁ hDiff1 hD₁diff hD₁
nomin _ _).mp hjunk1
      rw [hxB1] at hBe
      simp only [yStepG, xyStep, Prod.swap, h?2, Bool.false_eq_true, ite_false]
      exact hBe
  ·
    have hx1 : selectFn (if (deltaPair i n).1 then 1 else 0)
        (emptyInterDec P₀ (Nat.pair (stateIdx0 (stateInnerC T)) n))
        (IsComputableDiff.emptyDiffDec P₀ hDiff0 (Nat.pair (stateIdx0 (stateInnerC
T)) n)) = 1 := by omega
    have hA1eq : (xStepG splitX
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n)
        (deltaPair i n).1).1 = ∅ := by
      by_cases h?1 : (deltaPair i n).1 = true
      · simp only [xStepG, xyStep, h?1, ite_true] at hx1 ⊢
        rw [selectFn_one] at hx1
        have hAe := (emptyInterDec.eq_one_iff P₀ hD₀pos hD₀nomin _ _).mp hx1
        rw [hidx0] at hAe
        exact hAe
      · simp only [xStepG, xyStep, h?1, Bool.false_eq_true, ite_false] at hx1 ⊢
        rw [selectFn_zero] at hx1
        have hAe := (IsComputableDiff.emptyDiffDec.eq_one_iff P₀ hDiff0 hD₀diff hD₀
nomin _ _).mp hx1
        rw [hidx0] at hAe
        exact hAe
    obtain ⟨hspecAB, -⟩ := xStepG.spec D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos
      hD₁diff splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair i)
 n
```

```
        rw [atomPairG.succ_eq]
        exact Set.subset_eq_empty
          (yStepG.snd_subset splitY _ _ (P₁.X n) (deltaPair i n).2) (hspecAB.mpr hA1eq)
    .
      have hn1 : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 1
     := by
        have := atomPairJunk.le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY i
     n
        omega
      exact Set.subset_eq_empty (atomPairG.snd_subset D₀ D₁ hD₀pos hD₀diff splitY
    hySplit hD₁pos
        hD₁diff splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair i) n
    ) (ih hn1)

end atomPairG

namespace atomPairJunk
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)


include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in

theorem eq_zero_of_snd_ne_empty {i n : ℕ}
    (h : (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 = ∅) :
    atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 0 := by
  by_contra hne
  have h1 : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 1 :=
    by
    have := atomPairJunk.le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY i n
    omega
  exact h (atomPairG.snd_eq_empty_of_junk_eq_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
    hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne i n h1
    )

end atomPairJunk
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

namespace atomPairJunk
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718
```

```
section YPseqCodeIFormula

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀)

theorem eq_zero_of_yPseqAtomJunk {n i : ℕ} (b : Bool)
    (hjunk : yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
      (if b then 1 else 0) = 0) :
    atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 0 := by
  set s0 := packState2
      (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
      (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
      (atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) with hs0def
  set s1 := xSubStep P₀ P₁ hDiff0 splitX hSplitX (Nat.pair n (Nat.pair (if b then 1
    else 0) s0))
    with hs1def
  have h : stateJunk (ySubStep P₀ P₁ hDiff1 splitY hSplitY (Nat.pair n (Nat.pair 1 s1))
    ) = 0 := by
    have h' := hjunk
    unfold yPseqAtomJunk yPseqAtomState at h'
    rwa [← hs0def, ← hs1def] at h'
  have hxnonjunk : stateJunk s1 = 0 := by
    have h2 := h
    rw [ySubStep.junk_eq, selectFn_one] at h2
    exact junk_eq_zero_of_selectFn_eq_zero h2
  have h3 := hxnonjunk
  rw [hs1def, xSubStep.junk_eq, hs0def, stateJunk_packState2] at h3
  exact junk_eq_zero_of_selectFn_eq_zero h3

end YPseqCodeIFormula

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
```

```
theorem eq_zero_of_ne_empty {i n : ℕ}
    (h : (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1 = ∅) :
    atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 0 := by
  by_contra hne
  have h1 : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 1 :=
    by
    have := atomPairJunk.le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY i n
    omega
  exact h (atomPairG.fst_eq_empty_of_junk_eq_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
    hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne i n h1
    )

end atomPairJunk

end DomainTheory.NeighbourhoodSystems
```

effectiveIso812d_early_more.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d_early

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

namespace yPseqAtomJunk
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section YPseqCodeUnconditional

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty) (hUnion0 :
    IsComputableUnion P₀)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in

theorem eq_zero_of_bit {i n : ℕ}
    (hjunk0 : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 0) (
    b : Bool)
    (hne : (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) b).1 = ∅)
    (hinter : (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n)
```

```
  .1
      (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) b).2 ∩ P₁.X
   n = ∅) :
  yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i (if b then 1
  else 0) = 0 := by
obtain ⟨hidx0, hidx1⟩ := atomPairCodeState.correct P₀ P₁ hDiff0 hDiff1 splitX hSplitX
  splitY
  hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁
  mne i n
  hjunk0
have hxc0 : selectFn (if b then 1 else 0)
    (emptyInterDec P₀ (Nat.pair (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX
  splitY hSplitY
      n i) n))
    (IsComputableDiff.emptyDiffDec P₀ hDiff0 (Nat.pair (atomPairIdx0 P₀ P₁ hDiff0
  hDiff1 splitX hSplitX splitY
      hSplitY n i) n)) = 0 := by
  by_cases hb : b = true
  · simp only [xStepG, xyStep, hb, ite_true] at hne
    have hne' : P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
  n i) ∩
        P₀.X n = ∅ := by rw [hidx0]; exact hne
    simp only [hb, ite_true, selectFn_one]
    by_contra hcon
    have hle := emptyInterDec.le_one P₀ (Nat.pair
      (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) n)
    have h1 : emptyInterDec P₀ (Nat.pair
        (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) n) = 1
  := by omega
    exact hne' ((emptyInterDec.eq_one_iff P₀ hD₀pos hD₀nomin _ _).mp h1)
  · simp only [xStepG, xyStep, hb, Bool.false_eq_true, ite_false] at hne
    have hne' : P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
  n i) \
        P₀.X n = ∅ := by rw [hidx0]; exact hne
    simp only [hb, Bool.false_eq_true, ite_false, selectFn_zero]
    by_contra hcon
    have hle := IsComputableDiff.emptyDiffDec.le_one P₀ hDiff0 (Nat.pair
      (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) n)
    have h1 : IsComputableDiff.emptyDiffDec P₀ hDiff0 (Nat.pair
        (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) n) = 1
  := by omega
    exact hne' ((IsComputableDiff.emptyDiffDec.eq_one_iff P₀ hDiff0 hD₀diff hD₀nomin
  _ _).mp h1)
set s0 := packState2
    (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
    (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
    (atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) with hs0def
have hidx0' : P₀.X (stateIdx0 s0) =
    (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1 := by
  rw [hs0def, stateIdx0_packState2]; exact hidx0
have hidx1' : P₁.X (stateIdx1 s0) =
    (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 := by
  rw [hs0def, stateIdx1_packState2]; exact hidx1
set s1 := xSubStep P₀ P₁ hDiff0 splitX hSplitX (Nat.pair n (Nat.pair (if b then 1
  else 0) s0))
  with hs1def
```

```
  have hxnonjunk : stateJunk s1 = 0 := by
    rw [hs1def, xSubStep.junk_eq, hs0def, stateJunk_packState2, stateIdx0_packState2,
    hjunk0,
      selectFn_zero]
    exact hxc0
  obtain ⟨hAB, -, hBmem⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁
    pos hD₁diff
    splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair i) n
  obtain ⟨-, hxB1⟩ := xSubStep.correct P₀ P₁ hDiff0 splitX hSplitX hD₀pos hD₀diff hD₀
    nomin hxSplit
    hidx0' hidx1' hAB hBmem b hxnonjunk
  rw [← hs1def] at hxB1
  have hB1inter : P₁.X (stateIdx1 s1) ∩ P₁.X n = ∅ := by rw [hxB1]; exact hinter
  have hyc0 : emptyInterDec P₁ (Nat.pair (stateIdx1 s1) n) = 0 := by
    by_contra hcon
    have hle := emptyInterDec.le_one P₁ (Nat.pair (stateIdx1 s1) n)
    have h1 : emptyInterDec P₁ (Nat.pair (stateIdx1 s1) n) = 1 := by omega
    exact hB1inter ((emptyInterDec.eq_one_iff P₁ hD₁pos hD₁nomin _ _).mp h1)
  unfold yPseqAtomJunk yPseqAtomState
  rw [← hs0def, ← hs1def, ySubStep.junk_eq, selectFn_one, hxnonjunk, selectFn_zero]
  exact hyc0

end YPseqCodeUnconditional

section YPseqCodeUnconditional

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty) (hUnion0 :
    IsComputableUnion P₀)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in

theorem exists_zero (n : ℕ) :
    ∃ i < 4 ^ n, ∃ bx ≤ 1,
      yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i bx = 0 := by
  obtain ⟨i, hi, hBinter⟩ := atomPairG.exists_deltaPair_inter_Yn_ne_empty P₀ P₁ splitX
    splitY
    hD₀pos hD₀diff hxSplit hD₁pos hD₁diff hySplit hD₀mne hD₁mne hD₁nomin n
  have hBne : (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 = ∅ := fun hB
    =>
    hBinter (by rw [hB]; simp)
  have hjunk0 : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 0
    :=
    atomPairJunk.eq_zero_of_snd_ne_empty P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
      hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hBne
```

```
  obtain ⟨ihAB, ihA, ihB⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁
    pos hD₁diff
     splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair i) n
  have hunion := xStepG.snd_union hxSplit ihAB ihB (P₀.X n)
  rw [← hunion, Set.union_inter_distrib_right] at hBinter
  have hspec1 := hxSplit ihAB ihB (P₀.X n)
  have hex : (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) true).2 ∩
      P₁.X n = ∅ ∨
      (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) false).2 ∩
      P₁.X n = ∅ := by
    by_contra hcon
    push Not at hcon
    exact hBinter (by rw [hcon.1, hcon.2]; simp)
  rcases hex with hTinter | hFinter
  · have hTne : (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n)
    .1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) true).2 = ∅
     :=
      fun h => hTinter (by rw [h]; simp)
    have hA1ne : (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i)
    n).1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) true).1 = ∅
     :=
      mt hspec1.2.2.1.mp hTne
    have hzero := yPseqAtomJunk.eq_zero_of_bit P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
      hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hjunk0 true
      hA1ne hTinter
    exact ⟨i, hi, 1, le_refl 1, hzero⟩
  · have hFne : (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n)
    .1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) false).2 =
    ∅ :=
      fun h => hFinter (by rw [h]; simp)
    have hA1ne : (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i)
    n).1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) false).1 =
    ∅ :=
      mt hspec1.2.2.2.1.mp hFne
    have hzero := yPseqAtomJunk.eq_zero_of_bit P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
      hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hjunk0 false
      hA1ne hFinter
    exact ⟨i, hi, 0, Nat.zero_le 1, hzero⟩

end YPseqCodeUnconditional

end yPseqAtomJunk

namespace YFoldInner
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718
```

```
section YPseqCodeUnconditional

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty) (hUnion0 :
    IsComputableUnion P₀)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 in

theorem or_found (n : ℕ) :
    (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n 0 (4 ^ n)).
    unpair.1 = 1
      ∨ (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n 1 (4 ^
    n)
        ).unpair.1 = 1 := by
  obtain ⟨i, hi, bx, hbx, hzero⟩ := yPseqAtomJunk.exists_zero P₀ P₁ hDiff0 hDiff1 splitX
     hSplitX
    splitY hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀
    mne hD₁mne n
  interval_cases bx
  · exact Or.inl ((YFoldInner.found_iff P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hUnion0
      (Nat.zero_le 1) n (4 ^ n)).mpr ⟨i, hi, hzero⟩)
  · exact Or.inr ((YFoldInner.found_iff P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hUnion0
      (le_refl 1) n (4 ^ n)).mpr ⟨i, hi, hzero⟩)

end YPseqCodeUnconditional

end YFoldInner

namespace YPseqCode
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section YPseqCodeUnconditional

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
```

```
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty) (hUnion0 :
    IsComputableUnion P₀)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 in

theorem four_pow_found (n : ℕ) :
    (IsComputableUnion.combineFound2 hUnion0
      (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n 0 (4 ^ n)
    )
      (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n 1 (4 ^ n)
    )
      ).unpair.1 = 1 :=
  (IsComputableUnion.combineFound2.found_iff hUnion0
    (YFoldInner.found_le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
      (Nat.zero_le 1) n (4 ^ n))
    (YFoldInner.found_le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
      (le_refl 1) n (4 ^ n))).mpr
    (YFoldInner.or_found P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD₀
    diff hD₀nomin
      hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 n)

end YPseqCodeUnconditional

end YPseqCode

open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

namespace xPseqAtomJunk
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section XPseqCodeUnconditional

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty) (hUnion1 :
    IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in

theorem exists_zero (n : ℕ) :
    ∃ i < 4 ^ n, xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i =
    0 := by
  obtain ⟨i, hi, hne⟩ := atomPairG.exists_deltaPair_inter_Xn_ne_empty P₀ P₁ splitX
```

```
    splitY
    hD₀pos hD₀diff hxSplit hD₁pos hD₁diff hySplit hD₀mne hD₁mne hD₀nomin n
  have hAne : (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1 = ∅ := fun hA
    =>
    hne (Set.subset_eq_empty Set.inter_subset_left hA)
  have hjunk0 : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 0
    :=
    atomPairJunk.eq_zero_of_ne_empty P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
      hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hAne
  obtain ⟨hidx0, -⟩ := atomPairCodeState.correct P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
    hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne i n
    hjunk0
  have hne' : P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
     ∩
      P₀.X n = ∅ := by rw [hidx0]; exact hne
  refine ⟨i, hi, ?_⟩
  rw [xPseqAtomJunk.eq, hjunk0, selectFn_zero]
  by_contra hcon
  have hle := emptyInterDec.le_one P₀ (Nat.pair
    (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) n)
  have h1 : emptyInterDec P₀ (Nat.pair
      (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) n) = 1 := by
     omega
  exact hne' ((emptyInterDec.eq_one_iff P₀ hD₀pos hD₀nomin _ _).mp h1)

end XPseqCodeUnconditional

end xPseqAtomJunk

namespace XFold
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section XPseqCodeUnconditional

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty) (hUnion1 :
    IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in

theorem four_pow_found (n : ℕ) :
    (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n (4 ^ n)).unpair
    .1 = 1 :=
  (XFold.found_iff P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n (4 ^ n))
    .mpr
```

```
    (xPseqAtomJunk.exists_zero P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos
     hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne n)

end XPseqCodeUnconditional

end XFold

namespace XPseqCode
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section XPseqCodeUnconditional

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty) (hUnion1 :
    IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in

theorem mem_unconditional (n : ℕ) :
    D₁.mem (P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n
    )) :=
  XPseqCode.mem P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₁pos hD₁diff hD₁
    nomin hUnion1
    (XFold.four_pow_found P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD₀
    diff hD₀nomin
      hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion1 n)

end XPseqCodeUnconditional

end XPseqCode

open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section XYPseqCodeZero

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
```

```
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)

theorem xPseqAtomIdx0_eq {n i : ℕ}
    (h : xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 0) :
    stateIdx0 (xPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) =
      P₀.inter (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) n
    := by
  have h' : stateJunk (xSubStep P₀ P₁ hDiff0 splitX hSplitX (Nat.pair n (Nat.pair 1
      (packState2 (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
        (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
        (atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i))))) = 0 :=
     h
  rw [xSubStep.junk_eq] at h'
  unfold xPseqAtomState
  rw [xSubStep.idx0_eq (h := h'), stateIdx0_packState2, selectFn_one]

end XYPseqCodeZero

open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

namespace YPseqCode
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section YPseqCodeUnconditional

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty) (hUnion0 :
    IsComputableUnion P₀)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 in

theorem mem_unconditional (n : ℕ) :
    D₀.mem (P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n
    )) :=
  YPseqCode.mem P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD₀diff hD₀
    nomin hUnion0
```

```
    (YPseqCode.four_pow_found P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos
    hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 n)

end YPseqCodeUnconditional

end YPseqCode
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718


end DomainTheory.NeighbourhoodSystems
```

XPseqCode_more.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XPseqCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d_early_more

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

section XPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hUnion1 : IsComputableUnion P₁)

include hD₁pos hD₁diff hD₁nomin in

theorem mem_XPseqCode_iff {n : ℕ}
    (hfound : (XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n (4 ^ n
    )).unpair.1
      = 1) (z : β) :
    z ∈ P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n) ↔
      ∃ i < 4 ^ n, xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
    = 0 ∧
        z ∈ P₁.X (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
    :=
  XFold.mem_iff P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₁pos hD₁diff hD₁
    nomin hUnion1
    n (4 ^ n) hfound z

end XPseqCode

section XPseqCodeUnconditional

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
```

```
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty) (hUnion1 :
    IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in

theorem mem_XPseqCode_iff_unconditional (n : ℕ) (z : β) :
    z ∈ P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n) ↔
      ∃ i < 4 ^ n, xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
    = 0 ∧
        z ∈ P₁.X (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
    :=
  mem_XPseqCode_iff P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₁pos hD₁diff hD₁
    nomin
    hUnion1 (XFold.four_pow_found P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀
    pos hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion1 n) z

end XPseqCodeUnconditional

end DomainTheory.NeighbourhoodSystems
```

YPseqCode_more.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.YPseqCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d_early_more

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

section YPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hUnion0 : IsComputableUnion P₀)
```

```
include hD₀pos hD₀diff hD₀nomin in

theorem mem_YPseqCode_iff {n : ℕ}
    (hfound : (IsComputableUnion.combineFound2 hUnion0
      (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n 0 (4 ^ n)
    )
      (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n 1 (4 ^ n)
    )
      ).unpair.1 = 1) (z : α) :
    z ∈ P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n) ↔
      (∃ i < 4 ^ n, yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
     0 = 0 ∧
        z ∈ P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i 0)
    ) ∨
      (∃ i < 4 ^ n, yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
     1 = 0 ∧
        z ∈ P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i 1)
    ) := by
  have hle0 := YFoldInner.found_le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hUnion0
     (Nat.zero_le 1) n (4 ^ n)
  have hle1 := YFoldInner.found_le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hUnion0
     (le_refl 1) n (4 ^ n)
  have hmem0 := YFoldInner.mem_of_found P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
    hD₀diff hD₀nomin hUnion0 (Nat.zero_le 1) n (4 ^ n)
  have hmem1 := YFoldInner.mem_of_found P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
    hD₀diff hD₀nomin hUnion0 (le_refl 1) n (4 ^ n)
  have heq : YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n =
      (IsComputableUnion.combineFound2 hUnion0
        (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n 0 (4 ^
    n))
        (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n 1 (4 ^
    n))
        ).unpair.2 := rfl
  rw [heq, IsComputableUnion.combineFound2.mem_iff hD₀pos hD₀diff hD₀nomin hUnion0 hle0
     hle1 hmem0 hmem1 hfound z]
  constructor
  · rintro (⟨hf0, hz⟩ | ⟨hf1, hz⟩)
    · exact Or.inl ((YFoldInner.mem_iff P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
        hD₀diff hD₀nomin hUnion0 (Nat.zero_le 1) n (4 ^ n) hf0 z).mp hz)
    · exact Or.inr ((YFoldInner.mem_iff P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
        hD₀diff hD₀nomin hUnion0 (le_refl 1) n (4 ^ n) hf1 z).mp hz)
  · rintro (⟨i, hi, hie, hz⟩ | ⟨i, hi, hie, hz⟩)
    · have hf0 : (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
    n 0 (4 ^ n)
          ).unpair.1 = 1 :=
        (YFoldInner.found_iff P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
          (Nat.zero_le 1) n (4 ^ n)).mpr ⟨i, hi, hie⟩
      exact Or.inl ⟨hf0, (YFoldInner.mem_iff P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
        hD₀pos hD₀diff hD₀nomin hUnion0 (Nat.zero_le 1) n (4 ^ n) hf0 z).mpr ⟨i, hi, hie
```

```
    , hz⟩⟩
    · have hf1 : (YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
    n 1 (4 ^ n)
          ).unpair.1 = 1 :=
        (YFoldInner.found_iff P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
          (le_refl 1) n (4 ^ n)).mpr ⟨i, hi, hie⟩
      exact Or.inr ⟨hf1, (YFoldInner.mem_iff P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
        hD₀pos hD₀diff hD₀nomin hUnion0 (le_refl 1) n (4 ^ n) hf1 z).mpr ⟨i, hi, hie, hz
    ⟩⟩

end YPseqCode

section YPseqCodeUnconditional

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty) (hUnion0 :
    IsComputableUnion P₀)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 in

theorem mem_YPseqCode_iff_unconditional (n : ℕ) (z : α) :
    z ∈ P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n) ↔
      (∃ i < 4 ^ n, yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
     0 = 0 ∧
        z ∈ P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i 0)
    ) ∨
      (∃ i < 4 ^ n, yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
     1 = 0 ∧
        z ∈ P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i 1)
    ) :=
  mem_YPseqCode_iff P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD₀diff hD₀
    nomin
    hUnion0 (YPseqCode.four_pow_found P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
     hD₀pos
      hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 n)
    z

end YPseqCodeUnconditional

end DomainTheory.NeighbourhoodSystems
```

combinedCode.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    domainIso812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomE
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.deltaPair
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.xStepG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.yStepG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomPairG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairCodeState
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomIdx
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XFold
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    YFoldInner
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XPseqCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.YPseqCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomIdx
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableDiff
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableSplit
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableUnion
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    ComputableBisection
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d_early
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d_early_more

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section CombinedCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
```

```
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

noncomputable def combinedXCode (n : ℕ) : Set α :=
  if n % 2 = 0 then P₀.X (n / 2)
  else P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 (n /
    2))

end CombinedCode

namespace combinedXCode
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section CombinedCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

theorem even (k : ℕ) :
    combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 (2 * k) = P
    ₀.X k := by
  unfold combinedXCode
  rw [ite_eq_left (by omega : (2 * k) % 2 = 0), show (2 * k) / 2 = k from by omega]

theorem odd (k : ℕ) :
    combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 (2 * k + 1)
     =
      P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 k) :=
    by
  unfold combinedXCode
  rw [ite_eq_right (by omega : ¬ (2 * k + 1) % 2 = 0), show (2 * k + 1) / 2 = k from
    by omega]

end CombinedCode

section CombinedCodeTransfer
```

```
variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

theorem subset_master (i : ℕ) :
    combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 i ⊆ D₀.
    master := by
  unfold combinedXCode
  split <;> exact D₀.sub_master (P₀.mem_X _)

end CombinedCodeTransfer

end combinedXCode
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section CombinedCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

noncomputable def combinedYCode (n : ℕ) : Set β :=
  if n % 2 = 0 then
    P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 (n / 2))
  else P₁.X (n / 2)

end CombinedCode

namespace combinedYCode
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section CombinedCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
```

```
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

theorem even (k : ℕ) :
    combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 (2 * k) =
      P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 k) :=
    by
  unfold combinedYCode
  rw [ite_eq_left (by omega : (2 * k) % 2 = 0), show (2 * k) / 2 = k from by omega]

theorem odd (k : ℕ) :
    combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 (2 * k + 1)
     =
      P₁.X k := by
  unfold combinedYCode
  rw [ite_eq_right (by omega : ¬ (2 * k + 1) % 2 = 0), show (2 * k + 1) / 2 = k from
    by omega]

end CombinedCode

section CombinedCodeTransfer

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

theorem subset_master (i : ℕ) :
    combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 i ⊆ D₁.
    master := by
  unfold combinedYCode
  split <;> exact D₁.sub_master (P₁.mem_X _)

end CombinedCodeTransfer

end combinedYCode
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

end DomainTheory.NeighbourhoodSystems
```

primrec812d.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    domainIso812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomE
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.deltaPair
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.xStepG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.yStepG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomPairG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairCodeState
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomIdx
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XFold
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    YFoldInner
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XPseqCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.YPseqCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomIdx
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableDiff
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableSplit
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableUnion
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    ComputableBisection
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d_early
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d_early_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedCode

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

namespace primrec
```

```
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

theorem stateIdx0 : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.stateIdx0 :=
    Nat.Primrec.left

theorem stateIdx1 : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.stateIdx1 :=
    Nat.Primrec.left.comp Nat.Primrec.right

theorem stateJunk : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.stateJunk :=
    Nat.Primrec.right.comp Nat.Primrec.right

section AtomPairCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)

theorem atomPairBase : Nat.Primrec (_root_.DomainTheory.NeighbourhoodSystems.
    atomPairBase P₀ P₁) :=
  (Nat.Primrec.id.pair (Nat.Primrec.const (stateBase2 P₀.masterIdx P₁.masterIdx))).
    of_eq
    fun k => by unfold _root_.DomainTheory.NeighbourhoodSystems.atomPairBase
    packStateC; simp only [id_eq]

end AtomPairCode

theorem IsComputableUnion.combineFound2 {? : Type*} {W : NeighborhoodSystem ?}
    {Q : ComputablePresentation W} (hUnion : IsComputableUnion Q) :
    Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    IsComputableUnion.combineFound2 hUnion t.unpair.1 t.unpair.2) := by
  have h0 : Nat.Primrec (fun t : ℕ => t.unpair.1) := Nat.Primrec.left
  have h1 : Nat.Primrec (fun t : ℕ => t.unpair.2) := Nat.Primrec.right
  have hf0 : Nat.Primrec (fun t : ℕ => t.unpair.1.unpair.1) := Nat.Primrec.left.comp
    h0
  have hf1 : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1) := Nat.Primrec.left.comp
    h1
  have hv0 : Nat.Primrec (fun t : ℕ => t.unpair.1.unpair.2) := Nat.Primrec.right.comp
    h0
  have hv1 : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.2) := Nat.Primrec.right.comp
    h1
  have hunion : Nat.Primrec
      (fun t : ℕ => hUnion.unionIdx t.unpair.1.unpair.2 t.unpair.2.unpair.2) :=
    (hUnion.unionIdx_primrec.comp (hv0.pair hv1)).of_eq
      fun t => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hinner : Nat.Primrec (fun t : ℕ => selectFn t.unpair.2.unpair.1
      (Nat.pair 1 (hUnion.unionIdx t.unpair.1.unpair.2 t.unpair.2.unpair.2)) t.unpair
    .1) :=
    primrec_selectFn hf1 ((Nat.Primrec.const 1).pair hunion) h0
  exact (primrec_selectFn hf0 hinner h1).of_eq fun t => by unfold _root_.DomainTheory.
    NeighbourhoodSystems.IsComputableUnion.combineFound2; simp only []

theorem stateInnerC : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.stateInnerC
```

```
     := Nat.Primrec.right

theorem stateRemC : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.stateRemC :=
    Nat.Primrec.left

section XSubStep

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)

theorem xwB1 : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.xwB1 := Nat.
    Primrec.left.comp Nat.Primrec.right

end XSubStep

section AtomPairCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)

theorem pcN : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.pcN := primrec.xwB1

end AtomPairCode

section XSubStep

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)

theorem xwN : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.xwN := Nat.Primrec.
    left

theorem xwS : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.xwS := Nat.Primrec.
    right.comp Nat.Primrec.right

end XSubStep

section AtomPairCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
```

```
    ₀ splitY)

theorem pcT : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.pcT := primrec.xwS

end AtomPairCode

section XSubStep

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)

theorem xSubStep : Nat.Primrec (_root_.DomainTheory.NeighbourhoodSystems.xSubStep P₀ P₁
     hDiff0 splitX hSplitX) := by
  have hn : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.xwN := primrec.xwN
  have hb1 : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.xwB1 := primrec.xwB1
  have hs : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.xwS := primrec.xwS
  have hidx0 : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.
    stateIdx0 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) := primrec.stateIdx0.
    comp hs
  have hidx1 : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.
    stateIdx1 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) := primrec.stateIdx1.
    comp hs
  have hjunk : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.
    stateJunk (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) := primrec.stateJunk.
    comp hs
  have hinter : Nat.Primrec (fun w => P₀.inter (_root_.DomainTheory.
    NeighbourhoodSystems.stateIdx0 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) (
    _root_.DomainTheory.NeighbourhoodSystems.xwN w)) :=
    (P₀.inter_primrec.comp (hidx0.pair hn)).of_eq
      fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hdiffidx : Nat.Primrec (fun w => hDiff0.diffIdx (_root_.DomainTheory.
    NeighbourhoodSystems.stateIdx0 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) (
    _root_.DomainTheory.NeighbourhoodSystems.xwN w)) :=
    (hDiff0.diffIdx_primrec.comp (hidx0.pair hn)).of_eq
      fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hemptyInter : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.
    emptyInterDec P₀ (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (
    _root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
    NeighbourhoodSystems.xwN w))) :=
    (primrec.emptyInterDec P₀).comp (hidx0.pair hn)
  have hemptyDiff : Nat.Primrec
      (fun w => _root_.DomainTheory.NeighbourhoodSystems.IsComputableDiff.emptyDiffDec
     P₀ hDiff0 (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.
    DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems
    .xwN w))) :=
    (IsComputableDiff.primrec.emptyDiffDec P₀ hDiff0).comp (hidx0.pair hn)
  have hposIdx : Nat.Primrec
      (fun w => hSplitX.posIdx (_root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (
    _root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
    NeighbourhoodSystems.stateIdx1 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) (
    _root_.DomainTheory.NeighbourhoodSystems.xwN w)) :=
    (hSplitX.posIdx_primrec.comp (hidx0.pair (hidx1.pair hn))).of_eq
      fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
```

```
have hnegIdx : Nat.Primrec
    (fun w => hSplitX.negIdx (_root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (
  _root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
  NeighbourhoodSystems.stateIdx1 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) (
  _root_.DomainTheory.NeighbourhoodSystems.xwN w)) :=
   (hSplitX.negIdx_primrec.comp (hidx0.pair (hidx1.pair hn))).of_eq
     fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
have hdirectIdx : Nat.Primrec (fun w => selectFn (_root_.DomainTheory.
  NeighbourhoodSystems.xwB1 w)
    (P₀.inter (_root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.
  DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems
  .xwN w)) (hDiff0.diffIdx (_root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (
  _root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
  NeighbourhoodSystems.xwN w))) :=
   primrec_selectFn hb1 hinter hdiffidx
have hdirectEmpty : Nat.Primrec (fun w => selectFn (_root_.DomainTheory.
  NeighbourhoodSystems.xwB1 w)
    (_root_.DomainTheory.NeighbourhoodSystems.emptyInterDec P₀ (Nat.pair (_root_.
  DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.DomainTheory.
  NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w)))
    (_root_.DomainTheory.NeighbourhoodSystems.IsComputableDiff.emptyDiffDec P₀ hDiff0
   (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.DomainTheory
  .NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w))))
  :=
  primrec_selectFn hb1 hemptyInter hemptyDiff
have hsplitIdx : Nat.Primrec (fun w => selectFn (_root_.DomainTheory.
  NeighbourhoodSystems.xwB1 w)
    (hSplitX.posIdx (_root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.
  DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems
  .stateIdx1 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
  NeighbourhoodSystems.xwN w))
    (hSplitX.negIdx (_root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.
  DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems
  .stateIdx1 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
  NeighbourhoodSystems.xwN w))) :=
  primrec_selectFn hb1 hposIdx hnegIdx
have hnewJunk : Nat.Primrec (fun w => selectFn (_root_.DomainTheory.
  NeighbourhoodSystems.stateJunk (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) 1
  (selectFn (_root_.DomainTheory.NeighbourhoodSystems.xwB1 w)
    (_root_.DomainTheory.NeighbourhoodSystems.emptyInterDec P₀ (Nat.pair (_root_.
  DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.DomainTheory.
  NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w)))
    (_root_.DomainTheory.NeighbourhoodSystems.IsComputableDiff.emptyDiffDec P₀ hDiff0
   (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.DomainTheory
  .NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w)))))
  :=
  primrec_selectFn hjunk (Nat.Primrec.const 1) hdirectEmpty
have hidx0' : Nat.Primrec (fun w => selectFn (selectFn (_root_.DomainTheory.
  NeighbourhoodSystems.stateJunk (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) 1
  (selectFn (_root_.DomainTheory.NeighbourhoodSystems.xwB1 w)
    (_root_.DomainTheory.NeighbourhoodSystems.emptyInterDec P₀ (Nat.pair (_root_.
  DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.DomainTheory.
  NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w)))
    (_root_.DomainTheory.NeighbourhoodSystems.IsComputableDiff.emptyDiffDec P₀ hDiff0
   (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.DomainTheory
  .NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w)))))
```

```
    0
      (selectFn (_root_.DomainTheory.NeighbourhoodSystems.xwB1 w) (P₀.inter (_root_.
    DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.DomainTheory.
    NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w))
        (hDiff0.diffIdx (_root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.
    DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems
    .xwN w)))) :=
    primrec_selectFn hnewJunk (Nat.Primrec.const 0) hdirectIdx
  have hidx1' : Nat.Primrec (fun w => selectFn (selectFn (_root_.DomainTheory.
    NeighbourhoodSystems.stateJunk (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) 1
    (selectFn (_root_.DomainTheory.NeighbourhoodSystems.xwB1 w)
      (_root_.DomainTheory.NeighbourhoodSystems.emptyInterDec P₀ (Nat.pair (_root_.
    DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.DomainTheory.
    NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w)))
      (_root_.DomainTheory.NeighbourhoodSystems.IsComputableDiff.emptyDiffDec P₀ hDiff0
     (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.DomainTheory
    .NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w)))))
    0
      (selectFn (_root_.DomainTheory.NeighbourhoodSystems.xwB1 w) (hSplitX.posIdx (
    _root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.DomainTheory.
    NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (
    _root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
    NeighbourhoodSystems.xwN w))
        (hSplitX.negIdx (_root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (_root_.
    DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems
    .stateIdx1 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
    NeighbourhoodSystems.xwN w)))) :=
    primrec_selectFn hnewJunk (Nat.Primrec.const 0) hsplitIdx
  exact (hidx0'.pair (hidx1'.pair hnewJunk)).of_eq fun w => by
    unfold _root_.DomainTheory.NeighbourhoodSystems.xSubStep packState2
    simp only []

end XSubStep

section YSubStep

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff1 : IsComputableDiff P₁)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)

theorem ySubStep : Nat.Primrec (_root_.DomainTheory.NeighbourhoodSystems.ySubStep P₀ P₁
     hDiff1 splitY hSplitY) := by
  have hn : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.xwN := primrec.xwN
  have hb2 : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.xwB1 := primrec.xwB1
  have hs : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.xwS := primrec.xwS
  have hidx0 : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.
    stateIdx0 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) := primrec.stateIdx0.
    comp hs
  have hidx1 : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.
    stateIdx1 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) := primrec.stateIdx1.
    comp hs
  have hjunk : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.
    stateJunk (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) := primrec.stateJunk.
    comp hs
```

```
have hinter : Nat.Primrec (fun w => P₁.inter (_root_.DomainTheory.
  NeighbourhoodSystems.stateIdx1 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) (
  _root_.DomainTheory.NeighbourhoodSystems.xwN w)) :=
   (P₁.inter_primrec.comp (hidx1.pair hn)).of_eq
     fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
have hdiffidx : Nat.Primrec (fun w => hDiff1.diffIdx (_root_.DomainTheory.
  NeighbourhoodSystems.stateIdx1 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) (
  _root_.DomainTheory.NeighbourhoodSystems.xwN w)) :=
   (hDiff1.diffIdx_primrec.comp (hidx1.pair hn)).of_eq
     fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
have hemptyInter : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.
  emptyInterDec P₁ (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (
  _root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
  NeighbourhoodSystems.xwN w))) :=
   (primrec.emptyInterDec P₁).comp (hidx1.pair hn)
have hemptyDiff : Nat.Primrec
     (fun w => _root_.DomainTheory.NeighbourhoodSystems.IsComputableDiff.emptyDiffDec
    P₁ hDiff1 (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.
  DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems
  .xwN w))) :=
   (IsComputableDiff.primrec.emptyDiffDec P₁ hDiff1).comp (hidx1.pair hn)
have hposIdx : Nat.Primrec
     (fun w => hSplitY.posIdx (_root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (
  _root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
  NeighbourhoodSystems.stateIdx0 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) (
  _root_.DomainTheory.NeighbourhoodSystems.xwN w)) :=
   (hSplitY.posIdx_primrec.comp (hidx1.pair (hidx0.pair hn))).of_eq
     fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
have hnegIdx : Nat.Primrec
     (fun w => hSplitY.negIdx (_root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (
  _root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
  NeighbourhoodSystems.stateIdx0 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) (
  _root_.DomainTheory.NeighbourhoodSystems.xwN w)) :=
   (hSplitY.negIdx_primrec.comp (hidx1.pair (hidx0.pair hn))).of_eq
     fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
have hdirectIdx : Nat.Primrec (fun w => selectFn (_root_.DomainTheory.
  NeighbourhoodSystems.xwB1 w)
     (P₁.inter (_root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.
  DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems
  .xwN w)) (hDiff1.diffIdx (_root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (
  _root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
  NeighbourhoodSystems.xwN w))) :=
   primrec_selectFn hb2 hinter hdiffidx
have hdirectEmpty : Nat.Primrec (fun w => selectFn (_root_.DomainTheory.
  NeighbourhoodSystems.xwB1 w)
     (_root_.DomainTheory.NeighbourhoodSystems.emptyInterDec P₁ (Nat.pair (_root_.
  DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.DomainTheory.
  NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w)))
     (_root_.DomainTheory.NeighbourhoodSystems.IsComputableDiff.emptyDiffDec P₁ hDiff1
    (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.DomainTheory
  .NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w))))
  :=
   primrec_selectFn hb2 hemptyInter hemptyDiff
have hsplitIdx : Nat.Primrec (fun w => selectFn (_root_.DomainTheory.
  NeighbourhoodSystems.xwB1 w)
     (hSplitY.posIdx (_root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.
```

```
  DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems
  .stateIdx0 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
  NeighbourhoodSystems.xwN w))
    (hSplitY.negIdx (_root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.
  DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems
  .stateIdx0 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
  NeighbourhoodSystems.xwN w))) :=
  primrec_selectFn hb2 hposIdx hnegIdx
have hnewJunk : Nat.Primrec (fun w => selectFn (_root_.DomainTheory.
  NeighbourhoodSystems.stateJunk (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) 1
  (selectFn (_root_.DomainTheory.NeighbourhoodSystems.xwB1 w)
    (_root_.DomainTheory.NeighbourhoodSystems.emptyInterDec P₁ (Nat.pair (_root_.
  DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.DomainTheory.
  NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w)))
    (_root_.DomainTheory.NeighbourhoodSystems.IsComputableDiff.emptyDiffDec P₁ hDiff1
   (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.DomainTheory
  .NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w)))))
  :=
  primrec_selectFn hjunk (Nat.Primrec.const 1) hdirectEmpty
have hidx0' : Nat.Primrec (fun w => selectFn (selectFn (_root_.DomainTheory.
  NeighbourhoodSystems.stateJunk (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) 1
  (selectFn (_root_.DomainTheory.NeighbourhoodSystems.xwB1 w)
    (_root_.DomainTheory.NeighbourhoodSystems.emptyInterDec P₁ (Nat.pair (_root_.
  DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.DomainTheory.
  NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w)))
    (_root_.DomainTheory.NeighbourhoodSystems.IsComputableDiff.emptyDiffDec P₁ hDiff1
   (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.DomainTheory
  .NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w)))))
  0
    (selectFn (_root_.DomainTheory.NeighbourhoodSystems.xwB1 w) (hSplitY.posIdx (
  _root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.DomainTheory.
  NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.stateIdx0 (
  _root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
  NeighbourhoodSystems.xwN w))
      (hSplitY.negIdx (_root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.
  DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems
  .stateIdx0 (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.
  NeighbourhoodSystems.xwN w)))) :=
  primrec_selectFn hnewJunk (Nat.Primrec.const 0) hsplitIdx
have hidx1' : Nat.Primrec (fun w => selectFn (selectFn (_root_.DomainTheory.
  NeighbourhoodSystems.stateJunk (_root_.DomainTheory.NeighbourhoodSystems.xwS w)) 1
  (selectFn (_root_.DomainTheory.NeighbourhoodSystems.xwB1 w)
    (_root_.DomainTheory.NeighbourhoodSystems.emptyInterDec P₁ (Nat.pair (_root_.
  DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.DomainTheory.
  NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w)))
    (_root_.DomainTheory.NeighbourhoodSystems.IsComputableDiff.emptyDiffDec P₁ hDiff1
   (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.DomainTheory
  .NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w)))))
  0
    (selectFn (_root_.DomainTheory.NeighbourhoodSystems.xwB1 w) (P₁.inter (_root_.
  DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.DomainTheory.
  NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems.xwN w))
      (hDiff1.diffIdx (_root_.DomainTheory.NeighbourhoodSystems.stateIdx1 (_root_.
  DomainTheory.NeighbourhoodSystems.xwS w)) (_root_.DomainTheory.NeighbourhoodSystems
  .xwN w)))) :=
  primrec_selectFn hnewJunk (Nat.Primrec.const 0) hdirectIdx
```

```
  exact (hidx0'.pair (hidx1'.pair hnewJunk)).of_eq fun w => by
    unfold _root_.DomainTheory.NeighbourhoodSystems.ySubStep packState2
    simp only []

end YSubStep

section AtomPairCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)

theorem atomPairStep :
    Nat.Primrec (_root_.DomainTheory.NeighbourhoodSystems.atomPairStep P₀ P₁ hDiff0
    hDiff1 splitX hSplitX splitY hSplitY) := by
  have hy : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.pcN := primrec.pcN
  have hst : Nat.Primrec _root_.DomainTheory.NeighbourhoodSystems.pcT := primrec.pcT
  have hrem : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.stateRemC
     (_root_.DomainTheory.NeighbourhoodSystems.pcT w)) := primrec.stateRemC.comp hst
  have hs : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.stateInnerC
     (_root_.DomainTheory.NeighbourhoodSystems.pcT w)) := primrec.stateInnerC.comp hst
  have hb1 : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.stateRemC
    (_root_.DomainTheory.NeighbourhoodSystems.pcT w) % 2) := primrec_mod2.comp hrem
  have hb2 : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.stateRemC
    (_root_.DomainTheory.NeighbourhoodSystems.pcT w) / 2 % 2) :=
    primrec_mod2.comp (primrec_div2.comp hrem)
  have hw1 : Nat.Primrec (fun w => Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.
    pcN w) (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.stateRemC (_root_.
    DomainTheory.NeighbourhoodSystems.pcT w) % 2)
      (_root_.DomainTheory.NeighbourhoodSystems.stateInnerC (_root_.DomainTheory.
    NeighbourhoodSystems.pcT w)))) := hy.pair (hb1.pair hs)
  have hs1 : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.xSubStep P₀
     P₁ hDiff0 splitX hSplitX
      (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.pcN w) (Nat.pair (_root_.
    DomainTheory.NeighbourhoodSystems.stateRemC (_root_.DomainTheory.
    NeighbourhoodSystems.pcT w) % 2) (_root_.DomainTheory.NeighbourhoodSystems.
    stateInnerC (_root_.DomainTheory.NeighbourhoodSystems.pcT w))))) :=
    (primrec.xSubStep P₀ P₁ hDiff0 splitX hSplitX).comp hw1
  have hw2 : Nat.Primrec (fun w => Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.
    pcN w) (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.stateRemC (_root_.
    DomainTheory.NeighbourhoodSystems.pcT w) / 2 % 2)
      (_root_.DomainTheory.NeighbourhoodSystems.xSubStep P₀ P₁ hDiff0 splitX hSplitX
        (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.pcN w) (Nat.pair (_root_.
    DomainTheory.NeighbourhoodSystems.stateRemC (_root_.DomainTheory.
    NeighbourhoodSystems.pcT w) % 2) (_root_.DomainTheory.NeighbourhoodSystems.
    stateInnerC (_root_.DomainTheory.NeighbourhoodSystems.pcT w)))))) :=
    hy.pair (hb2.pair hs1)
  have hs2 : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.ySubStep P₀
     P₁ hDiff1 splitY hSplitY
      (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.pcN w) (Nat.pair (_root_.
    DomainTheory.NeighbourhoodSystems.stateRemC (_root_.DomainTheory.
    NeighbourhoodSystems.pcT w) / 2 % 2)
```

```
        (_root_.DomainTheory.NeighbourhoodSystems.xSubStep P₀ P₁ hDiff0 splitX hSplitX
          (Nat.pair (_root_.DomainTheory.NeighbourhoodSystems.pcN w) (Nat.pair (_root_
    .DomainTheory.NeighbourhoodSystems.stateRemC (_root_.DomainTheory.
    NeighbourhoodSystems.pcT w) % 2) (_root_.DomainTheory.NeighbourhoodSystems.
    stateInnerC (_root_.DomainTheory.NeighbourhoodSystems.pcT w))))))) :=
    (primrec.ySubStep P₀ P₁ hDiff1 splitY hSplitY).comp hw2
  have hrem' : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.
    stateRemC (_root_.DomainTheory.NeighbourhoodSystems.pcT w) / 4) := by
    have : Nat.Primrec (fun w => _root_.DomainTheory.NeighbourhoodSystems.stateRemC (
    _root_.DomainTheory.NeighbourhoodSystems.pcT w) / 2 / 2) :=
      primrec_div2.comp (primrec_div2.comp hrem)
    exact this.of_eq fun w => by rw [Nat.div_div_eq_div_mul]
  exact (hrem'.pair hs2).of_eq fun w => by
    unfold _root_.DomainTheory.NeighbourhoodSystems.atomPairStep packStateC
    simp only []

theorem atomPairCodeState :
    Nat.Primrec (_root_.DomainTheory.NeighbourhoodSystems.atomPairCodeState P₀ P₁
    hDiff0 hDiff1 splitX hSplitX splitY hSplitY) :=
  (Nat.Primrec.prec (primrec.atomPairBase P₀ P₁)
    (primrec.atomPairStep P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY)).of_eq fun
    _ => rfl

theorem atomPairIdx0 : Nat.Primrec
    (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.atomPairIdx0 P₀ P₁ hDiff0
    hDiff1 splitX hSplitX splitY hSplitY t.unpair.1 t.unpair.2) :=
  (primrec.stateIdx0.comp (primrec.stateInnerC.comp
    ((primrec.atomPairCodeState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY).comp
      (Nat.Primrec.right.pair Nat.Primrec.left)))).of_eq fun _ => rfl

theorem atomPairIdx1 : Nat.Primrec
    (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.atomPairIdx1 P₀ P₁ hDiff0
    hDiff1 splitX hSplitX splitY hSplitY t.unpair.1 t.unpair.2) :=
  (primrec.stateIdx1.comp (primrec.stateInnerC.comp
    ((primrec.atomPairCodeState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY).comp
      (Nat.Primrec.right.pair Nat.Primrec.left)))).of_eq fun _ => rfl

theorem atomPairJunk : Nat.Primrec
    (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.atomPairJunk P₀ P₁ hDiff0
    hDiff1 splitX hSplitX splitY hSplitY t.unpair.1 t.unpair.2) :=
  (primrec.stateJunk.comp (primrec.stateInnerC.comp
    ((primrec.atomPairCodeState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY).comp
      (Nat.Primrec.right.pair Nat.Primrec.left)))).of_eq fun _ => rfl

end AtomPairCode

end primrec

end DomainTheory.NeighbourhoodSystems
```

primrec812d_more.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
```

```
    domainIso812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomE
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.deltaPair
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.xStepG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.yStepG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomPairG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairCodeState
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomIdx
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XFold
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    YFoldInner
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XPseqCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.YPseqCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomIdx
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableDiff
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableSplit
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableUnion
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    ComputableBisection
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d_early
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d_early_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    primrec812d

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

namespace primrec
section _root_.DomainTheory.NeighbourhoodSystems.XPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
```

```
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hUnion1 : IsComputableUnion P₁)

theorem xPseqAtomState : Nat.Primrec
    (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.xPseqAtomState P₀ P₁ hDiff0
    hDiff1 splitX hSplitX splitY hSplitY
      t.unpair.1 t.unpair.2) := by
  have hn : Nat.Primrec (fun t : ℕ => t.unpair.1) := Nat.Primrec.left
  have hidx0 : Nat.Primrec (fun t : ℕ =>
      _root_.DomainTheory.NeighbourhoodSystems.atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY hSplitY t.unpair.1 t.unpair.2) :=
    primrec.atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
  have hidx1 : Nat.Primrec (fun t : ℕ =>
      _root_.DomainTheory.NeighbourhoodSystems.atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY hSplitY t.unpair.1 t.unpair.2) :=
    primrec.atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
  have hjunk : Nat.Primrec (fun t : ℕ =>
      _root_.DomainTheory.NeighbourhoodSystems.atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY hSplitY t.unpair.1 t.unpair.2) :=
    primrec.atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
  have hpacked : Nat.Primrec (fun t : ℕ => packState2
      (_root_.DomainTheory.NeighbourhoodSystems.atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX
     hSplitX splitY hSplitY t.unpair.1 t.unpair.2)
      (_root_.DomainTheory.NeighbourhoodSystems.atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX
     hSplitX splitY hSplitY t.unpair.1 t.unpair.2)
      (_root_.DomainTheory.NeighbourhoodSystems.atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX
     hSplitX splitY hSplitY t.unpair.1 t.unpair.2)) :=
    (hidx0.pair (hidx1.pair hjunk)).of_eq fun _ => rfl
  have hinner : Nat.Primrec (fun t : ℕ => Nat.pair 1 (packState2
      (_root_.DomainTheory.NeighbourhoodSystems.atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX
     hSplitX splitY hSplitY t.unpair.1 t.unpair.2)
      (_root_.DomainTheory.NeighbourhoodSystems.atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX
     hSplitX splitY hSplitY t.unpair.1 t.unpair.2)
      (_root_.DomainTheory.NeighbourhoodSystems.atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX
     hSplitX splitY hSplitY t.unpair.1 t.unpair.2))) :=
    (Nat.Primrec.const 1).pair hpacked
  exact ((primrec.xSubStep P₀ P₁ hDiff0 splitX hSplitX).comp (hn.pair hinner)).of_eq
    fun _ => rfl

theorem xPseqAtomIdx : Nat.Primrec
    (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.xPseqAtomIdx P₀ P₁ hDiff0
    hDiff1 splitX hSplitX splitY hSplitY
      t.unpair.1 t.unpair.2) :=
  (primrec.stateIdx1.comp (primrec.xPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY
    hSplitY)).of_eq fun _ => rfl

theorem xPseqAtomJunk : Nat.Primrec
    (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.xPseqAtomJunk P₀ P₁ hDiff0
    hDiff1 splitX hSplitX splitY hSplitY
```

```
      t.unpair.1 t.unpair.2) :=
  (primrec.stateJunk.comp (primrec.xPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY
    hSplitY)).of_eq fun _ => rfl

theorem XFoldStep :
    Nat.Primrec (_root_.DomainTheory.NeighbourhoodSystems.XFoldStep P₀ P₁ hDiff0 hDiff1
     splitX hSplitX splitY hSplitY hUnion1) := by
  have hn : Nat.Primrec (fun w : ℕ => w.unpair.1) := Nat.Primrec.left
  have hi : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hacc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hni : Nat.Primrec (fun w : ℕ => Nat.pair w.unpair.1 w.unpair.2.unpair.1) := hn.
    pair hi
  have hjunk : Nat.Primrec (fun w : ℕ =>
      _root_.DomainTheory.NeighbourhoodSystems.xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX
     hSplitX splitY hSplitY w.unpair.1
        w.unpair.2.unpair.1) :=
    ((primrec.xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY).comp hni
    ).of_eq
      fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hidx : Nat.Primrec (fun w : ℕ =>
      _root_.DomainTheory.NeighbourhoodSystems.xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY hSplitY w.unpair.1
        w.unpair.2.unpair.1) :=
    ((primrec.xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY).comp hni)
    .of_eq
      fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hfound : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp hacc
  have hval : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp hacc
  have hunion : Nat.Primrec (fun w : ℕ => hUnion1.unionIdx w.unpair.2.unpair.2.unpair
    .2
      (_root_.DomainTheory.NeighbourhoodSystems.xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX
     hSplitX splitY hSplitY w.unpair.1
        w.unpair.2.unpair.1)) :=
    (hUnion1.unionIdx_primrec.comp (hval.pair hidx)).of_eq
      fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hinner : Nat.Primrec (fun w : ℕ => selectFn w.unpair.2.unpair.2.unpair.1
      (Nat.pair 1 (hUnion1.unionIdx w.unpair.2.unpair.2.unpair.2
        (_root_.DomainTheory.NeighbourhoodSystems.xPseqAtomIdx P₀ P₁ hDiff0 hDiff1
    splitX hSplitX splitY hSplitY w.unpair.1
          w.unpair.2.unpair.1)))
      (Nat.pair 1 (_root_.DomainTheory.NeighbourhoodSystems.xPseqAtomIdx P₀ P₁ hDiff0
    hDiff1 splitX hSplitX splitY hSplitY w.unpair.1
        w.unpair.2.unpair.1))) :=
    primrec_selectFn hfound ((Nat.Primrec.const 1).pair hunion) ((Nat.Primrec.const 1)
    .pair hidx)
  exact (primrec_selectFn hjunk hacc hinner).of_eq fun w => by unfold _root_.
    DomainTheory.NeighbourhoodSystems.XFoldStep; simp only []

theorem XFold : Nat.Primrec
    (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.XFold P₀ P₁ hDiff0 hDiff1
    splitX hSplitX splitY hSplitY hUnion1
```

```
      t.unpair.1 t.unpair.2) :=
  (Nat.Primrec.prec (Nat.Primrec.const (Nat.pair 0 0))
    (primrec.XFoldStep P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1)).
    of_eq
    fun _ => rfl

theorem XPseqCode : Nat.Primrec
    (_root_.DomainTheory.NeighbourhoodSystems.XPseqCode P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY hSplitY hUnion1) := by
  have h4n : Nat.Primrec (fun n : ℕ => 4 ^ n) := primrec_pow₂ (Nat.Primrec.const 4) Nat
    .Primrec.id
  refine (Nat.Primrec.right.comp
    ((primrec.XFold P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1).comp
      (Nat.Primrec.id.pair h4n))).of_eq fun n => ?_
  show (_root_.DomainTheory.NeighbourhoodSystems.XFold P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY hSplitY hUnion1
    (Nat.pair n (4 ^ n)).unpair.1 (Nat.pair n (4 ^ n)).unpair.2).unpair.2 = _root_.
    DomainTheory.NeighbourhoodSystems.XPseqCode P₀ P₁ hDiff0
      hDiff1 splitX hSplitX splitY hSplitY hUnion1 n
  rw [unpair_pair_fst, unpair_pair_snd]; rfl

end _root_.DomainTheory.NeighbourhoodSystems.XPseqCode

section _root_.DomainTheory.NeighbourhoodSystems.YPseqCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hUnion0 : IsComputableUnion P₀)

theorem yPseqAtomState : Nat.Primrec
    (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.yPseqAtomState P₀ P₁ hDiff0
    hDiff1 splitX hSplitX splitY hSplitY
      t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair.2) := by
  have hn : Nat.Primrec (fun t : ℕ => t.unpair.1) := Nat.Primrec.left
  have hi : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hbx : Nat.Primrec (fun t : ℕ => t.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hni : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.1 t.unpair.2.unpair.1) := hn.
    pair hi
  have hidx0 : Nat.Primrec (fun t : ℕ =>
      _root_.DomainTheory.NeighbourhoodSystems.atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY hSplitY t.unpair.1
        t.unpair.2.unpair.1) :=
    ((primrec.atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY).comp hni)
    .of_eq
      fun t => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hidx1 : Nat.Primrec (fun t : ℕ =>
      _root_.DomainTheory.NeighbourhoodSystems.atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY hSplitY t.unpair.1
```

```
      t.unpair.2.unpair.1) :=
  ((primrec.atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY).comp hni)
  .of_eq
    fun t => by simp only [unpair_pair_fst, unpair_pair_snd]
have hjunk : Nat.Primrec (fun t : ℕ =>
    _root_.DomainTheory.NeighbourhoodSystems.atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX
  hSplitX splitY hSplitY t.unpair.1
      t.unpair.2.unpair.1) :=
  ((primrec.atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY).comp hni)
  .of_eq
    fun t => by simp only [unpair_pair_fst, unpair_pair_snd]
have hpacked : Nat.Primrec (fun t : ℕ => packState2
    (_root_.DomainTheory.NeighbourhoodSystems.atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX
   hSplitX splitY hSplitY t.unpair.1
      t.unpair.2.unpair.1)
    (_root_.DomainTheory.NeighbourhoodSystems.atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX
   hSplitX splitY hSplitY t.unpair.1
      t.unpair.2.unpair.1)
    (_root_.DomainTheory.NeighbourhoodSystems.atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX
   hSplitX splitY hSplitY t.unpair.1
      t.unpair.2.unpair.1)) :=
  (hidx0.pair (hidx1.pair hjunk)).of_eq fun _ => rfl
have hxinner : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.2.unpair.2 (packState2
    (_root_.DomainTheory.NeighbourhoodSystems.atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX
   hSplitX splitY hSplitY t.unpair.1
      t.unpair.2.unpair.1)
    (_root_.DomainTheory.NeighbourhoodSystems.atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX
   hSplitX splitY hSplitY t.unpair.1
      t.unpair.2.unpair.1)
    (_root_.DomainTheory.NeighbourhoodSystems.atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX
   hSplitX splitY hSplitY t.unpair.1
      t.unpair.2.unpair.1))) :=
  hbx.pair hpacked
have hxarg : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.1 (Nat.pair t.unpair.2.
  unpair.2
    (packState2 (_root_.DomainTheory.NeighbourhoodSystems.atomPairIdx0 P₀ P₁ hDiff0
  hDiff1 splitX hSplitX splitY hSplitY t.unpair.1
        t.unpair.2.unpair.1)
      (_root_.DomainTheory.NeighbourhoodSystems.atomPairIdx1 P₀ P₁ hDiff0 hDiff1
  splitX hSplitX splitY hSplitY t.unpair.1
        t.unpair.2.unpair.1)
      (_root_.DomainTheory.NeighbourhoodSystems.atomPairJunk P₀ P₁ hDiff0 hDiff1
  splitX hSplitX splitY hSplitY t.unpair.1
        t.unpair.2.unpair.1)))) :=
  hn.pair hxinner
have hxstep : Nat.Primrec (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
  xSubStep P₀ P₁ hDiff0 splitX hSplitX (Nat.pair
    t.unpair.1 (Nat.pair t.unpair.2.unpair.2 (packState2
      (_root_.DomainTheory.NeighbourhoodSystems.atomPairIdx0 P₀ P₁ hDiff0 hDiff1
  splitX hSplitX splitY hSplitY t.unpair.1
        t.unpair.2.unpair.1)
      (_root_.DomainTheory.NeighbourhoodSystems.atomPairIdx1 P₀ P₁ hDiff0 hDiff1
  splitX hSplitX splitY hSplitY t.unpair.1
        t.unpair.2.unpair.1)
      (_root_.DomainTheory.NeighbourhoodSystems.atomPairJunk P₀ P₁ hDiff0 hDiff1
  splitX hSplitX splitY hSplitY t.unpair.1
```

```
          t.unpair.2.unpair.1))))) :=
    (primrec.xSubStep P₀ P₁ hDiff0 splitX hSplitX).comp hxarg
  have hystep_arg : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.1 (Nat.pair 1
      (_root_.DomainTheory.NeighbourhoodSystems.xSubStep P₀ P₁ hDiff0 splitX hSplitX (
    Nat.pair t.unpair.1 (Nat.pair t.unpair.2.unpair.2
        (packState2 (_root_.DomainTheory.NeighbourhoodSystems.atomPairIdx0 P₀ P₁ hDiff0
     hDiff1 splitX hSplitX splitY hSplitY t.unpair.1
           t.unpair.2.unpair.1)
         (_root_.DomainTheory.NeighbourhoodSystems.atomPairIdx1 P₀ P₁ hDiff0 hDiff1
    splitX hSplitX splitY hSplitY t.unpair.1
           t.unpair.2.unpair.1)
         (_root_.DomainTheory.NeighbourhoodSystems.atomPairJunk P₀ P₁ hDiff0 hDiff1
    splitX hSplitX splitY hSplitY t.unpair.1
           t.unpair.2.unpair.1)))))))) :=
    hn.pair ((Nat.Primrec.const 1).pair hxstep)
  exact ((primrec.ySubStep P₀ P₁ hDiff1 splitY hSplitY).comp hystep_arg).of_eq fun _ =>
     rfl

theorem yPseqAtomIdx : Nat.Primrec
    (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.yPseqAtomIdx P₀ P₁ hDiff0
    hDiff1 splitX hSplitX splitY hSplitY
      t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair.2) :=
  (primrec.stateIdx0.comp (primrec.yPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY
    hSplitY)).of_eq fun _ => rfl

theorem yPseqAtomJunk : Nat.Primrec
    (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.yPseqAtomJunk P₀ P₁ hDiff0
    hDiff1 splitX hSplitX splitY hSplitY
      t.unpair.1 t.unpair.2.unpair.1 t.unpair.2.unpair.2) :=
  (primrec.stateJunk.comp (primrec.yPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY
    hSplitY)).of_eq fun _ => rfl

theorem YFoldStep :
    Nat.Primrec (_root_.DomainTheory.NeighbourhoodSystems.YFoldStep P₀ P₁ hDiff0 hDiff1
     splitX hSplitX splitY hSplitY hUnion0) := by
  have hn : Nat.Primrec (fun w : ℕ => w.unpair.1.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.left
  have hbx : Nat.Primrec (fun w : ℕ => w.unpair.1.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.left
  have hi : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp Nat.Primrec.right
  have hacc : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp Nat.Primrec.right
  have hnibx : Nat.Primrec (fun w : ℕ => Nat.pair w.unpair.1.unpair.1
      (Nat.pair w.unpair.2.unpair.1 w.unpair.1.unpair.2)) := hn.pair (hi.pair hbx)
  have hjunk : Nat.Primrec (fun w : ℕ =>
      _root_.DomainTheory.NeighbourhoodSystems.yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX
     hSplitX splitY hSplitY w.unpair.1.unpair.1
        w.unpair.2.unpair.1 w.unpair.1.unpair.2) :=
    ((primrec.yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY).comp
    hnibx).of_eq
      fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hidx : Nat.Primrec (fun w : ℕ =>
      _root_.DomainTheory.NeighbourhoodSystems.yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX
```

```
    hSplitX splitY hSplitY w.unpair.1.unpair.1
        w.unpair.2.unpair.1 w.unpair.1.unpair.2) :=
    ((primrec.yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY).comp
    hnibx).of_eq
      fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hfound : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2.unpair.1) :=
    Nat.Primrec.left.comp hacc
  have hval : Nat.Primrec (fun w : ℕ => w.unpair.2.unpair.2.unpair.2) :=
    Nat.Primrec.right.comp hacc
  have hunion : Nat.Primrec (fun w : ℕ => hUnion0.unionIdx w.unpair.2.unpair.2.unpair
    .2
      (_root_.DomainTheory.NeighbourhoodSystems.yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX
     hSplitX splitY hSplitY w.unpair.1.unpair.1
        w.unpair.2.unpair.1 w.unpair.1.unpair.2)) :=
    (hUnion0.unionIdx_primrec.comp (hval.pair hidx)).of_eq
      fun w => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hinner : Nat.Primrec (fun w : ℕ => selectFn w.unpair.2.unpair.2.unpair.1
      (Nat.pair 1 (hUnion0.unionIdx w.unpair.2.unpair.2.unpair.2
        (_root_.DomainTheory.NeighbourhoodSystems.yPseqAtomIdx P₀ P₁ hDiff0 hDiff1
    splitX hSplitX splitY hSplitY w.unpair.1.unpair.1
          w.unpair.2.unpair.1 w.unpair.1.unpair.2)))
      (Nat.pair 1 (_root_.DomainTheory.NeighbourhoodSystems.yPseqAtomIdx P₀ P₁ hDiff0
    hDiff1 splitX hSplitX splitY hSplitY
        w.unpair.1.unpair.1 w.unpair.2.unpair.1 w.unpair.1.unpair.2))) :=
    primrec_selectFn hfound ((Nat.Primrec.const 1).pair hunion) ((Nat.Primrec.const 1)
    .pair hidx)
  exact (primrec_selectFn hjunk hacc hinner).of_eq fun w => by unfold _root_.
    DomainTheory.NeighbourhoodSystems.YFoldStep; simp only []

theorem YFoldInnerPair : Nat.Primrec
    (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.YFoldInnerPair P₀ P₁ hDiff0
    hDiff1 splitX hSplitX splitY hSplitY hUnion0
      t.unpair.1 t.unpair.2) :=
  (Nat.Primrec.prec (Nat.Primrec.const (Nat.pair 0 0))
    (primrec.YFoldStep P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0)).
    of_eq
    fun _ => rfl

theorem YFoldInner : Nat.Primrec
    (fun t : ℕ => _root_.DomainTheory.NeighbourhoodSystems.YFoldInner P₀ P₁ hDiff0
    hDiff1 splitX hSplitX splitY hSplitY hUnion0
      t.unpair.1.unpair.1 t.unpair.1.unpair.2 t.unpair.2) := by
  have h1 : Nat.Primrec (fun t : ℕ => Nat.pair t.unpair.1.unpair.1 t.unpair.1.unpair
    .2) :=
    (Nat.Primrec.left.comp Nat.Primrec.left).pair (Nat.Primrec.right.comp Nat.Primrec.
    left)
  have h2 : Nat.Primrec (fun t : ℕ => Nat.pair
      (Nat.pair t.unpair.1.unpair.1 t.unpair.1.unpair.2) t.unpair.2) :=
    h1.pair Nat.Primrec.right
  exact ((primrec.YFoldInnerPair P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0).comp
    h2).of_eq fun t => by
      simp only [unpair_pair_fst, unpair_pair_snd]
      exact (YFoldInner.eq_pair P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0
        t.unpair.1.unpair.1 t.unpair.1.unpair.2 t.unpair.2).symm
```

```
theorem YPseqCode : Nat.Primrec
    (_root_.DomainTheory.NeighbourhoodSystems.YPseqCode P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY hSplitY hUnion0) := by
  have h4n : Nat.Primrec (fun n : ℕ => 4 ^ n) := primrec_pow₂ (Nat.Primrec.const 4) Nat
    .Primrec.id
  have hr0 : Nat.Primrec (fun n : ℕ =>
      _root_.DomainTheory.NeighbourhoodSystems.YFoldInner P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY hSplitY hUnion0 n 0 (4 ^ n)) := by
    have harg : Nat.Primrec (fun n : ℕ => Nat.pair (Nat.pair n 0) (4 ^ n)) :=
      (Nat.Primrec.id.pair (Nat.Primrec.const 0)).pair h4n
    exact ((primrec.YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0).comp
      harg).of_eq fun n => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hr1 : Nat.Primrec (fun n : ℕ =>
      _root_.DomainTheory.NeighbourhoodSystems.YFoldInner P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY hSplitY hUnion0 n 1 (4 ^ n)) := by
    have harg : Nat.Primrec (fun n : ℕ => Nat.pair (Nat.pair n 1) (4 ^ n)) :=
      (Nat.Primrec.id.pair (Nat.Primrec.const 1)).pair h4n
    exact ((primrec.YFoldInner P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0).comp
      harg).of_eq fun n => by simp only [unpair_pair_fst, unpair_pair_snd]
  have hcomb : Nat.Primrec (fun n : ℕ => _root_.DomainTheory.NeighbourhoodSystems.
    IsComputableUnion.combineFound2 hUnion0
      (_root_.DomainTheory.NeighbourhoodSystems.YFoldInner P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY hSplitY hUnion0 n 0 (4 ^ n))
      (_root_.DomainTheory.NeighbourhoodSystems.YFoldInner P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY hSplitY hUnion0 n 1 (4 ^ n))) :=
    ((primrec.IsComputableUnion.combineFound2 hUnion0).comp (hr0.pair hr1)).of_eq
      fun n => by simp only [unpair_pair_fst, unpair_pair_snd]
  exact (Nat.Primrec.right.comp hcomb).of_eq fun _ => rfl

end _root_.DomainTheory.NeighbourhoodSystems.YPseqCode

end primrec

end DomainTheory.NeighbourhoodSystems
```

xPseqAtomIdx_more.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomIdx
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    XPseqCode_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d_early

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

namespace xPseqAtomIdx
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718
```

```
section XPseqCodeIFormula

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 800000 in

theorem subset_atomPairIdx1 {n m : ℕ}
    (hjunk : xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n m = 0) :
    P₁.X (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n m) ⊆
      P₁.X (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n m) := by
  have hraw := hjunk
  rw [xPseqAtomJunk.eq] at hraw
  obtain ⟨hAjunk, hempty0⟩ := selectFn.one_eq_zero_iff.mp hraw
  have hidxeq := xPseqAtomIdx.eq P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hjunk
  have hcs := atomPairCodeState.correct P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne m n hAjunk
  have hinv := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos hD₁diff
    splitX hxSplit
    P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair m) n
  have hspec := hxSplit hinv.1 hinv.2.2 (P₀.X n)
  have hne : (splitX (P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY n m))
      (P₁.X (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n m)) (P₀.X
     n)).1 =
      ∅ := by
    rw [hcs.1, hcs.2]
    have hempty' : P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
     n m) ∩
        P₀.X n = ∅ := (emptyInterDec.eq_one_iff P₀ hD₀pos hD₀nomin _ _).not.mp (by omega
    )
    rw [hcs.1] at hempty'
    exact hspec.2.2.1.not.mp hempty'
  have hposspec := hSplitX.posIdx_spec
    (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n m)
    (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n m) n hne
  rw [hcs.1, hcs.2] at hposspec
  rw [hidxeq, ← hposspec, hcs.2]
  calc (splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair m) n).1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair m) n).2 (P₀.X n)).1
      ⊆ (splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair m) n).1
```

```
          (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair m) n).2 (P₀.X n)).1 ∪
        (splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair m) n).1
          (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair m) n).2 (P₀.X n)).2 :=
        Set.subset_union_left
    _ = (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair m) n).2 := hspec.2.2.2.2.1

end XPseqCodeIFormula

section XPseqCodeIFormula

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 800000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 800000 in

theorem eq_inter_XPseqCode {n k : ℕ} (hk : k < 4 ^ n)
    (hjunk : xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k = 0) :
    P₁.X (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k) =
      P₁.X (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k) ∩
        P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n) :=
    by
  apply Set.Subset.antisymm
  · intro z hz
    refine ⟨xPseqAtomIdx.subset_atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
      hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hjunk hz, ?_⟩
    exact (mem_XPseqCode_iff_unconditional P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
      hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion1 n z
    ).mpr
      ⟨k, hk, hjunk, hz⟩
  · rintro z ⟨hzB, hzXP⟩
    obtain ⟨k', hk', hjunk', hz'⟩ := (mem_XPseqCode_iff_unconditional P₀ P₁ hDiff0
    hDiff1 splitX
      hSplitX splitY hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin
    hySplit hD₀mne
      hD₁mne hUnion1 n z).mp hzXP
    by_cases hkk' : k' = k
    · rwa [hkk'] at hz'
    · exfalso
```

```
      have hAjunk : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k
    = 0 := by
        have h := hjunk
        rw [xPseqAtomJunk.eq] at h
        exact junk_eq_zero_of_selectFn_eq_zero h
      have hAjunk' : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k
    ' = 0 := by
        have h := hjunk'
        rw [xPseqAtomJunk.eq] at h
        exact junk_eq_zero_of_selectFn_eq_zero h
      obtain ⟨i, hi, hne⟩ := deltaPair.exists_ne_of_lt_of_ne hk' hk hkk'
      have hdisj := (atomPairCodeState.disjoint P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
        hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
        (n := n) (k := k') (k' := k) hAjunk' hAjunk ⟨i, hi, hne⟩).2
      have hz'' : z ∈ P₁.X (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY n k') :=
        xPseqAtomIdx.subset_atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
          hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hjunk'
    hz'
      exact absurd (Set.mem_inter hz'' hzB) (by rw [hdisj]; simp)

end XPseqCodeIFormula

end xPseqAtomIdx

end DomainTheory.NeighbourhoodSystems
```

xStepG_more.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.xStepG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomIdx_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d_early
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairG_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    XPseqCode_more

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

namespace xStepG
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section CombinedCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
```

```
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 1000000 in

theorem snd_eq_inter_XPseqCode (? : ℕ → Bool × Bool) (n : ℕ) :
    (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 (P₀.X n) true).2 =
      (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 ∩
        P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n) :=
    by
  simp only [xStepG, xyStep, ite_true]
  set k := encodeDeltaPair ? n with hkdef
  have hklt : k < 4 ^ n := encodeDeltaPair.lt ? n
  have hagree : ∀ i < n, ? i = deltaPair k i := fun i hi =>
    (deltaPair.encodeDeltaPair ? n i hi).symm
  have hcongr : atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n =
      atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair k) n :=
    atomPairG.congr D₀ D₁ splitY splitX P₀.X P₁.X hagree
  rw [hcongr]
  set A := (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair k) n).1 with hAdef
  set B := (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair k) n).2 with hBdef
  obtain ⟨hAB, -, hBmem⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁
    pos hD₁diff
    splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair k) n
  rw [← hAdef] at hAB
  rw [← hBdef] at hAB hBmem
  by_cases hB : B = ∅
  · have hspec := hxSplit hAB (Or.inl hB) (P₀.X n)
    have hunion := hspec.2.2.2.2.1
    have h1empty : (splitX A B (P₀.X n)).1 = ∅ :=
      Set.subset_eq_empty Set.subset_union_left (hunion.trans hB)
    rw [h1empty, hB]; simp
  · have hAjunk : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k =
    0 :=
      atomPairJunk.eq_zero_of_snd_ne_empty P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hB
    have hcs := atomPairCodeState.correct P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
      hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne k n hAjunk
    by_cases hxj : xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k
    = 0
    · have hIF := xPseqAtomIdx.eq_inter_XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
        hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion1 hklt
```

```
    hxj
  have hidxeq := xPseqAtomIdx.eq P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
hxj
  have hraw' := hxj
  rw [xPseqAtomJunk.eq] at hraw'
  obtain ⟨-, hempty0'⟩ := selectFn.one_eq_zero_iff.mp hraw'
  have hAeq : A = P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
hSplitY n k) :=
    hAdef.trans hcs.1.symm
  have hempty'' : A ∩ P₀.X n = ∅ := by
    rw [hAeq]
    exact (emptyInterDec.eq_one_iff P₀ hD₀pos hD₀nomin _ _).not.mp (by omega)
  have hne : (splitX A B (P₀.X n)).1 = ∅ := by
    have hspecAB := hxSplit hAB hBmem (P₀.X n)
    exact hspecAB.2.2.1.not.mp hempty''
  have hposspec := hSplitX.posIdx_spec
    (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k)
    (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k) n
    (by rw [hcs.1, hcs.2]; exact hne)
  rw [hcs.1, hcs.2] at hposspec
  have hgoal2 : P₁.X (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
hSplitY n k) =
      (splitX A B (P₀.X n)).1 := by rw [hidxeq]; exact hposspec.symm
  rw [← hgoal2, hIF, hcs.2]
· have hxj1 : xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k =
 1 := by
    have := xPseqAtomJunk.le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
n k
    omega
  have h2empty : (splitX A B (P₀.X n)).1 = ∅ := by
    have h := hxj1
    rw [xPseqAtomJunk.eq, hAjunk, selectFn_zero] at h
    have hempty := (emptyInterDec.eq_one_iff P₀ hD₀pos hD₀nomin _ _).mp h
    rw [hcs.1] at hempty
    have hspec := hxSplit hAB hBmem (P₀.X n)
    exact hspec.2.2.1.mp hempty
  have hdisjXP : B ∩
      P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n)
= ∅ := by
    rw [Set.eq_empty_iff_forall_notMem]
    rintro z ⟨hzB, hzXP⟩
    obtain ⟨k', hk'lt, hjunk', hz'⟩ := (mem_XPseqCode_iff_unconditional P₀ P₁ hDiff0
 hDiff1
      splitX hSplitX splitY hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff
hD₁nomin
      hySplit hD₀mne hD₁mne hUnion1 n z).mp hzXP
    have hkk' : k' = k := by rintro rfl; omega
    have hAjunk' : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n
 k' = 0 := by
      have h := hjunk'
      rw [xPseqAtomJunk.eq] at h
      exact junk_eq_zero_of_selectFn_eq_zero h
    have hz'' : z ∈ P₁.X (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
hSplitY n k') :=
      xPseqAtomIdx.subset_atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
hSplitY hD₀pos
```

```
          hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hjunk
    ' hz'
        have hzB' : z ∈ P₁.X (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY n k) :=
          hcs.2 ▸ hzB
        obtain ⟨i, hi, hne⟩ := deltaPair.exists_ne_of_lt_of_ne hklt hk'lt hkk'.symm
        have hdisj := (atomPairCodeState.disjoint P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
          hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
          (n := n) (k := k) (k' := k') hAjunk hAjunk' ⟨i, hi, hne⟩).2
        exact absurd (Set.mem_inter hzB' hz'') (by rw [hdisj]; simp)
      rw [h2empty, hdisjXP]

end CombinedCode

section CombinedCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 1000000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in

theorem snd_succ_eq_XPseqCode (? : ℕ → Bool × Bool) (n : ℕ) (b : Bool) :
    (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 (P₀.X n) b).2 =
      (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 ∩
        (if b then P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion1 n)
          else D₁.master \
            P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n
    )) := by
  obtain ⟨hAB, -, hBmem⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁
    pos hD₁diff
    splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne ? n
  set A := (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).1 with hAdef
  set B := (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 with hBdef
  set XP := P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n
    ) with hXPdef
  have hspec := hxSplit hAB hBmem (P₀.X n)
  have hIeq : (xStepG splitX A B (P₀.X n) true).2 = B ∩ XP :=
    xStepG.snd_eq_inter_XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀
    pos hD₀diff
```

```
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion1 ? n
  by_cases hb : b = true
  · rw [hb, ite_eq_left rfl]; exact hIeq
  · rw [Bool.not_eq_true] at hb; subst hb
    rw [ite_eq_right (by simp)]
    have hJeq : (xStepG splitX A B (P₀.X n) false).2 = B \ XP := by
      have hunion :
          (xStepG splitX A B (P₀.X n) true).2 ∪ (xStepG splitX A B (P₀.X n) false).2 =
    B := by
        simp only [xStepG, xyStep]; exact hspec.2.2.2.2.1
      have hinter :
          (xStepG splitX A B (P₀.X n) true).2 ∩ (xStepG splitX A B (P₀.X n) false).2 =
    ∅ := by
        simp only [xStepG, xyStep]; exact hspec.2.2.2.2.2
      ext x
      constructor
      · intro hxJ
        have hxB : x ∈ B := hunion ▸ Or.inr hxJ
        refine ⟨hxB, fun hxXP => ?_⟩
        have hxI : x ∈ (xStepG splitX A B (P₀.X n) true).2 := hIeq ▸ Set.mem_inter hxB
     hxXP
        exact absurd (Set.mem_inter hxI hxJ) (by rw [hinter]; simp)
      · rintro ⟨hxB, hxnXP⟩
        rw [← hunion] at hxB
        rcases hxB with hxI | hxJ
        · exact absurd (hIeq ▸ hxI : x ∈ B ∩ XP).2 hxnXP
        · exact hxJ
    rw [hJeq]
    have hsub := atomPairG.snd_subset_master D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos
    hD₁diff
      splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne ? n
    ext x
    constructor
    · rintro ⟨hx1, hx2⟩; exact ⟨hx1, hsub hx1, hx2⟩
    · rintro ⟨hx1, -, hx2⟩; exact ⟨hx1, hx2⟩

end CombinedCode

end xStepG

end DomainTheory.NeighbourhoodSystems
```

yPseqAtomIdx_more.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomIdx
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    YPseqCode_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d_early
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xStepG_more
```

```
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

namespace yPseqAtomIdx
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section YPseqCodeIFormula

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 800000 in

theorem subset_xStepGFst {n i : ℕ} (b : Bool)
    (hjunk : yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
      (if b then 1 else 0) = 0) :
    P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i (if b then
     1 else 0)) ⊆
      (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) b).1 := by
  set s0 := packState2
      (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
      (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i)
      (atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) with hs0def
  set s1 := xSubStep P₀ P₁ hDiff0 splitX hSplitX (Nat.pair n (Nat.pair (if b then 1
    else 0) s0))
    with hs1def
  have h : stateJunk (ySubStep P₀ P₁ hDiff1 splitY hSplitY (Nat.pair n (Nat.pair 1 s1))
    ) = 0 := by
    have h' := hjunk
    unfold yPseqAtomJunk yPseqAtomState at h'
    rwa [← hs0def, ← hs1def] at h'
  have hxnonjunk : stateJunk s1 = 0 := by
    have h2 := h
    rw [ySubStep.junk_eq, selectFn_one] at h2
    exact junk_eq_zero_of_selectFn_eq_zero h2
  have hAjunk : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 0
    :=
    atomPairJunk.eq_zero_of_yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY b hjunk
  obtain ⟨hidx0, hidx1⟩ := atomPairCodeState.correct P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY
    hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁
```

```
    mne i n
    hAjunk
  have hidx0' : P₀.X (stateIdx0 s0) =
      (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1 := by
    rw [hs0def, stateIdx0_packState2]; exact hidx0
  have hidx1' : P₁.X (stateIdx1 s0) =
      (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 := by
    rw [hs0def, stateIdx1_packState2]; exact hidx1
  obtain ⟨ihAB, -, ihB⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁
    pos hD₁diff
    splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair i) n
  obtain ⟨hxc0, hxc1⟩ := xSubStep.correct P₀ P₁ hDiff0 splitX hSplitX hD₀pos hD₀diff hD₀
    nomin
    hxSplit hidx0' hidx1' ihAB ihB b hxnonjunk
  rw [← hs1def] at hxc0 hxc1
  have hAmem : (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n)
    .1
      (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) b).1 = ∅ ∨
      D₀.mem (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1
      (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) b).1 :=
    Or.inr (hxc0 ▸ P₀.mem_X _)
  have hBA : (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1
      (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) b).2 = ∅ ↔
      (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) b).1 = ∅ :=
     by
    have hspec1 := hxSplit ihAB ihB (P₀.X n)
    by_cases hb : b = true
    · simp only [xStepG, xyStep, hb, ite_true]; exact hspec1.2.2.1.symm
    · simp only [xStepG, xyStep, hb]; exact hspec1.2.2.2.1.symm
  obtain ⟨hyc0, -⟩ := ySubStep.correct P₀ P₁ hDiff1 splitY hSplitY hD₁pos hD₁diff hD₁
    nomin hySplit
    hxc0 hxc1 hBA hAmem true h
  have hgoaleq : P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n
     i
      (if b then 1 else 0)) =
      (yStepG splitY (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair
     i) n).1
          (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) b).1
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1
          (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) b).2
        (P₁.X n) true).1 := by
    show P₀.X (stateIdx0 (yPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY n i
      (if b then 1 else 0))) = _
    unfold yPseqAtomState
    rw [← hs0def, ← hs1def]
    exact hyc0
  rw [hgoaleq]
  exact yStepG.fst_subset hySplit hBA hAmem (P₁.X n) true

end YPseqCodeIFormula

section YPseqCodeIFormula

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
```

```
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 800000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in

theorem subset_atomPairIdx0 {n i : ℕ} (b : Bool)
    (hjunk : yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
      (if b then 1 else 0) = 0) :
    P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i (if b then
     1 else 0)) ⊆
      P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i) := by
  have hAjunk : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i = 0
    :=
    atomPairJunk.eq_zero_of_yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY b hjunk
  have hidx0 := (atomPairCodeState.correct P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
    hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne i n
    hAjunk).1
  rw [hidx0]
  exact (yPseqAtomIdx.subset_xStepGFst P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne b hjunk).
    trans
     (xStepG.fst_subset splitX _ _ (P₀.X n) b)

end YPseqCodeIFormula

section YPseqCodeIFormula

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀)
```

```
include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 800000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in

theorem eq_of_dichotomy {n i i' : ℕ} {z : α} (b b' : Bool)
    (hi : i < 4 ^ n) (hi' : i' < 4 ^ n)
    (hjunk : yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
      (if b then 1 else 0) = 0)
    (hjunk' : yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i'
      (if b' then 1 else 0) = 0)
    (hzA1 : z ∈ (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n
    ).1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) b).1)
    (hz' : z ∈ P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
    '
      (if b' then 1 else 0))) :
    z ∈ P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
      (if b then 1 else 0)) := by
  by_cases hii' : i' = i
  · by_cases hbb' : b' = b
    · rw [hii', hbb'] at hz'
      exact hz'
    · exfalso
      rw [hii'] at hjunk' hz'
      have hz'' : z ∈ (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (
    deltaPair i) n).1
          (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) b').1 :=
        yPseqAtomIdx.subset_xStepGFst P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
     hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne b'
    hjunk' hz'
      obtain ⟨ihAB, -, ihB⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit
    hD₁pos
        hD₁diff splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair i) n
      have hdisj := (xStepG.disjoint_of_ne hxSplit ihAB ihB (P₀.X n) (b := b) (b' := b
    ')
        (Ne.symm hbb')).1
      exact absurd (Set.mem_inter hzA1 hz'') (by rw [hdisj]; simp)
  · exfalso
    have hAjunk : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i =
    0 :=
      atomPairJunk.eq_zero_of_yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY b
        hjunk
    have hAjunk' : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i'
    = 0 :=
      atomPairJunk.eq_zero_of_yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY b'
        hjunk'
    obtain ⟨j, hj, hne⟩ := deltaPair.exists_ne_of_lt_of_ne hi' hi hii'
    have hdisj := (atomPairCodeState.disjoint P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
     hSplitY
      hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne (n
    := n)
```

```
      (k := i') (k' := i) hAjunk' hAjunk ⟨j, hj, hne⟩).1
    have hzA : z ∈ P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
     n i) := by
      have hAeq := (atomPairCodeState.correct P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
     hSplitY
        hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne i
    n
        hAjunk).1
      rw [hAeq]
      exact (xStepG.fst_subset splitX _ _ (P₀.X n) b) hzA1
    have hzA' : z ∈ P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY n i') :=
      yPseqAtomIdx.subset_atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne b' hjunk'
     hz'
    exact absurd (Set.mem_inter hzA' hzA) (by rw [hdisj]; simp)

end YPseqCodeIFormula

section YPseqCodeIFormula

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 800000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 in
set_option maxHeartbeats 800000 in

theorem eq_inter_YPseqCode {n i : ℕ} (hi : i < 4 ^ n) (b : Bool)
    (hjunk : yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i
      (if b then 1 else 0) = 0) :
    P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n i (if b then
     1 else 0)) =
      (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).1
          (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair i) n).2 (P₀.X n) b).1 ∩
        P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n) :=
     by
  apply Set.Subset.antisymm
  · intro z hz
    refine ⟨yPseqAtomIdx.subset_xStepGFst P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
```

```
      hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne b
    hjunk hz,
      ?_⟩
    refine (mem_YPseqCode_iff_unconditional P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
      hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 n
      z).mpr ?_
    by_cases hb : b = true
    · subst hb; exact Or.inr ⟨i, hi, hjunk, hz⟩
    · rw [Bool.not_eq_true] at hb; subst hb; exact Or.inl ⟨i, hi, hjunk, hz⟩
  · rintro z ⟨hzA1, hzYP⟩
    obtain (⟨i', hi', hjunk', hz'⟩ | ⟨i', hi', hjunk', hz'⟩) :=
      (mem_YPseqCode_iff_unconditional P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 n
     z).mp hzYP
    · exact yPseqAtomIdx.eq_of_dichotomy P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne b false
    hi hi'
        hjunk hjunk' hzA1 hz'
    · exact yPseqAtomIdx.eq_of_dichotomy P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne b true hi
     hi'
        hjunk hjunk' hzA1 hz'

end YPseqCodeIFormula

end yPseqAtomIdx

end DomainTheory.NeighbourhoodSystems
```

yStepG_more.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.yStepG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomIdx_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d_early
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    YPseqCode_more

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

namespace yStepG
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section CombinedCode
```

```
variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 1000000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 in
set_option maxHeartbeats 4000000 in

theorem fst_eq_inter_YPseqCode (? : ℕ → Bool × Bool) (n : ℕ) (bx : Bool) :
    (yStepG splitY
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).1
          (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 (P₀.X n) bx).1
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).1
          (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 (P₀.X n) bx).2
        (P₁.X n) true).1 =
      (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).1
          (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 (P₀.X n) bx).1 ∩
        P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n) :=
    by
  set k := encodeDeltaPair ? n with hkdef
  have hklt : k < 4 ^ n := encodeDeltaPair.lt ? n
  have hagree : ∀ i < n, ? i = deltaPair k i := fun i hi =>
    (deltaPair.encodeDeltaPair ? n i hi).symm
  have hcongr : atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n =
      atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair k) n :=
    atomPairG.congr D₀ D₁ splitY splitX P₀.X P₁.X hagree
  rw [hcongr]
  obtain ⟨ihAB, ihA, ihB⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁
    pos hD₁diff
    splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deltaPair k) n
  set A := (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair k) n).1 with hAdef
  set B := (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X (deltaPair k) n).2 with hBdef
  set A1 := (xStepG splitX A B (P₀.X n) bx).1 with hA1def
  set B1 := (xStepG splitX A B (P₀.X n) bx).2 with hB1def
  have hspec1 := hxSplit ihAB ihB (P₀.X n)
  have hA1B1 : A1 = ∅ ↔ B1 = ∅ := by
    rw [hA1def, hB1def]
    by_cases hbx : bx = true
    · simp only [xStepG, xyStep, hbx, ite_true]; exact hspec1.2.2.1
    · simp only [xStepG, xyStep, hbx, Bool.false_eq_true, ite_false]; exact hspec1
    .2.2.2.1
  have hA1mem : A1 = ∅ ∨ D₀.mem A1 := by
    rw [hA1def]
```

```
  by_cases hbx : bx = true
  · simp only [xStepG, xyStep, hbx, ite_true]; exact inter.mem_or_empty hD₀pos ihA (P
  ₀.mem_X n)
  · simp only [xStepG, xyStep, hbx, Bool.false_eq_true, ite_false]
    exact diff.mem_or_empty hD₀diff ihA (P₀.mem_X n)
by_cases hA1 : A1 = ∅
· have hB1e : B1 = ∅ := hA1B1.mp hA1
  have hspec2 := hySplit hA1B1.symm (Or.inl hA1) (P₁.X n)
  have hunion2 := hspec2.2.2.2.2.1
  have h1empty : (yStepG splitY A1 B1 (P₁.X n) true).1 = ∅ := by
    show (splitY B1 A1 (P₁.X n)).1 = ∅
    exact Set.subset_eq_empty Set.subset_union_left (hunion2.trans hA1)
  rw [h1empty, hA1]; simp
· have hAne : A = ∅ := by
    intro h
    apply hA1
    rw [hA1def]
    exact Set.subset_eq_empty (xStepG.fst_subset splitX A B (P₀.X n) bx) h
  have hAjunk : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k =
  0 :=
    atomPairJunk.eq_zero_of_ne_empty P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
  hSplitY hD₀pos
      hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne (hAdef ▶
  hAne)
  have hcs := atomPairCodeState.correct P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
  hSplitY hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne k n hAjunk
  set s0 := packState2
      (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k)
      (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k)
      (atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k) with
  hs0def
  set s1 := xSubStep P₀ P₁ hDiff0 splitX hSplitX
      (Nat.pair n (Nat.pair (if bx then 1 else 0) s0)) with hs1def
  have hidx0' : P₀.X (stateIdx0 s0) = A := by rw [hs0def, stateIdx0_packState2];
  exact hcs.1
  have hidx1' : P₁.X (stateIdx1 s0) = B := by rw [hs0def, stateIdx1_packState2];
  exact hcs.2
  by_cases hyj : yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k
      (if bx then 1 else 0) = 0
  · have hxnonjunk : stateJunk s1 = 0 := by
      have h' := hyj
      unfold yPseqAtomJunk yPseqAtomState at h'
      rw [← hs0def, ← hs1def] at h'
      rw [ySubStep.junk_eq, selectFn_one] at h'
      exact junk_eq_zero_of_selectFn_eq_zero h'
    obtain ⟨hxc0, hxc1⟩ := xSubStep.correct P₀ P₁ hDiff0 splitX hSplitX hD₀pos hD₀diff
   hD₀nomin
      hxSplit hidx0' hidx1' ihAB ihB bx hxnonjunk
    rw [← hs1def] at hxc0 hxc1
    rw [← hA1def] at hxc0
    rw [← hB1def] at hxc1
    have h : stateJunk (ySubStep P₀ P₁ hDiff1 splitY hSplitY (Nat.pair n (Nat.pair 1
  s1))) = 0 := by
      have h' := hyj
      unfold yPseqAtomJunk yPseqAtomState at h'
```

```
    rwa [← hs0def, ← hs1def] at h'
  obtain ⟨hyc0, -⟩ := ySubStep.correct P₀ P₁ hDiff1 splitY hSplitY hD₁pos hD₁diff hD
₁nomin
    hySplit hxc0 hxc1 hA1B1.symm hA1mem true h
  have hgoaleq : P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
hSplitY n k
      (if bx then 1 else 0)) = (yStepG splitY A1 B1 (P₁.X n) true).1 := by
    show P₀.X (stateIdx0 (yPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
hSplitY n k
      (if bx then 1 else 0))) = _
    unfold yPseqAtomState
    rw [← hs0def, ← hs1def]
    exact hyc0
  have hIF := yPseqAtomIdx.eq_inter_YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX
splitY hSplitY
    hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
hUnion0 hklt
    bx hyj
  rw [← hA1def] at hIF
  rw [← hgoaleq, hIF]
· have hyj1 : yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY n k
      (if bx then 1 else 0) = 1 := by
    have := yPseqAtomJunk.le_one P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
      (bx := if bx then 1 else 0) (by cases bx <;> simp) n k
    omega
  have hs1junk_eq : stateJunk s1 = selectFn (if bx then 1 else 0)
      (emptyInterDec P₀ (Nat.pair (stateIdx0 s0) n))
      (IsComputableDiff.emptyDiffDec P₀ hDiff0 (Nat.pair (stateIdx0 s0) n)) := by
    rw [hs1def, xSubStep.junk_eq, hs0def, stateJunk_packState2, hAjunk,
selectFn_zero]
  have hs1le : stateJunk s1 ≤ 1 := by
    rw [hs1junk_eq]
    exact selectFn.le_one (by cases bx <;> simp) (emptyInterDec.le_one P₀ _)
      (IsComputableDiff.emptyDiffDec.le_one P₀ hDiff0 _)
  have hxnonjunk : stateJunk s1 = 0 := by
    by_contra hne
    have h3 : selectFn (if bx then 1 else 0) (emptyInterDec P₀ (Nat.pair (stateIdx0
 s0) n))
        (IsComputableDiff.emptyDiffDec P₀ hDiff0 (Nat.pair (stateIdx0 s0) n)) = 1
:= by
      rw [← hs1junk_eq]; omega
    have hA1e : A1 = ∅ := by
      rw [hA1def]
      by_cases hbx : bx = true
      · simp only [xStepG, xyStep, hbx, ite_true]
        simp only [hbx, ite_true, selectFn_one] at h3
        rw [← hidx0']
        exact (emptyInterDec.eq_one_iff P₀ hD₀pos hD₀nomin _ _).mp h3
      · simp only [xStepG, xyStep, hbx, Bool.false_eq_true, ite_false]
        simp only [hbx, Bool.false_eq_true, ite_false, selectFn_zero] at h3
        rw [← hidx0']
        exact (IsComputableDiff.emptyDiffDec.eq_one_iff P₀ hDiff0 hD₀diff hD₀nomin
_ _).mp h3
    exact hA1 hA1e
  have h : stateJunk (ySubStep P₀ P₁ hDiff1 splitY hSplitY (Nat.pair n (Nat.pair 1
s1))) = 1 := by
```

```
    have h' := hyj1
    unfold yPseqAtomJunk yPseqAtomState at h'
    rwa [← hs0def, ← hs1def] at h'
  have hyInter : emptyInterDec P₁ (Nat.pair (stateIdx1 s1) n) = 1 := by
    have h2 := h
    rw [ySubStep.junk_eq, hxnonjunk, selectFn_zero, selectFn_one] at h2
    exact h2
  obtain ⟨hxc0, hxc1⟩ := xSubStep.correct P₀ P₁ hDiff0 splitX hSplitX hD₀pos hD₀diff
 hD₀nomin
    hxSplit hidx0' hidx1' ihAB ihB bx hxnonjunk
  rw [← hs1def] at hxc0 hxc1
  rw [← hA1def] at hxc0
  rw [← hB1def] at hxc1
  have hB1Yempty : B1 ∩ (P₁.X n) = ∅ := by
    rw [← hxc1]
    exact (emptyInterDec.eq_one_iff P₁ hD₁pos hD₁nomin _ _).mp hyInter
  have hspec2 := hySplit hA1B1.symm hA1mem (P₁.X n)
  have h1empty : (yStepG splitY A1 B1 (P₁.X n) true).1 = ∅ := by
    show (splitY B1 A1 (P₁.X n)).1 = ∅
    exact hspec2.2.2.1.mp hB1Yempty
  have hdisjYP : A1 ∩ P₀.X
      (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n) = ∅
:= by
    rw [Set.eq_empty_iff_forall_notMem]
    rintro z ⟨hzA1, hzYP⟩
    obtain (⟨k', hk'lt, hjunk', hz'⟩ | ⟨k', hk'lt, hjunk', hz'⟩) :=
      (mem_YPseqCode_iff_unconditional P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
hSplitY hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
hUnion0 n z).mp
        hzYP
    · rcases eq_or_ne k' k with hkk' | hkk'
      · exfalso
        subst hkk'
        have hbxc : bx = false := by
          intro hbxeq
          have hzero : (if bx then (1 : ℕ) else 0) = 0 := by rw [hbxeq]; simp
          rw [hzero] at hyj1
          omega
        have hz'' : z ∈ (xStepG splitX A B (P₀.X n) false).1 :=
          yPseqAtomIdx.subset_xStepGFst P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
hSplitY
            hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne
hD₁mne false
            hjunk' hz'
        have hdisj := (xStepG.disjoint_of_ne hxSplit ihAB ihB (P₀.X n) (b := bx) (b
' := false)
          hbxc).1
        rw [← hA1def] at hdisj
        exact absurd (Set.mem_inter hzA1 hz'') (by rw [hdisj]; simp)
      · have hAjunk' : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
hSplitY n k' = 0 :=
          atomPairJunk.eq_zero_of_yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX
splitY
            hSplitY false hjunk'
        obtain ⟨j, hj, hne⟩ := deltaPair.exists_ne_of_lt_of_ne hk'lt hklt hkk'
```

```
        have hdisj := (atomPairCodeState.disjoint P₀ P₁ hDiff0 hDiff1 splitX
hSplitX splitY
          hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD
₀mne
          hD₁mne (n := n) (k := k') (k' := k) hAjunk' hAjunk ⟨j, hj, hne⟩).1
        have hzAk : z ∈ P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX
splitY hSplitY n
            k) := by
          rw [hcs.1]
          exact (xStepG.fst_subset splitX A B (P₀.X n) bx) (hA1def ▸ hzA1)
        have hzAk' : z ∈ P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX
splitY hSplitY n
            k') :=
          yPseqAtomIdx.subset_atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX
splitY hSplitY
            hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne
hD₁mne false
            hjunk' hz'
        exact absurd (Set.mem_inter hzAk' hzAk) (by rw [hdisj]; simp)
    · rcases eq_or_ne k' k with hkk' | hkk'
      · exfalso
        subst hkk'
        have hbxc : bx = true := by
          intro hbxeq
          have hone : (if bx then (1 : ℕ) else 0) = 1 := by rw [hbxeq]; simp
          rw [hone] at hyj1
          omega
        have hz'' : z ∈ (xStepG splitX A B (P₀.X n) true).1 :=
          yPseqAtomIdx.subset_xStepGFst P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
hSplitY
            hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne
hD₁mne true
            hjunk' hz'
        have hdisj := (xStepG.disjoint_of_ne hxSplit ihAB ihB (P₀.X n) (b := bx) (b
' := true)
            hbxc).1
        rw [← hA1def] at hdisj
        exact absurd (Set.mem_inter hzA1 hz'') (by rw [hdisj]; simp)
      · have hAjunk' : atomPairJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
hSplitY n k' = 0 :=
          atomPairJunk.eq_zero_of_yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX
splitY
            hSplitY true hjunk'
        obtain ⟨j, hj, hne⟩ := deltaPair.exists_ne_of_lt_of_ne hk'lt hklt hkk'
        have hdisj := (atomPairCodeState.disjoint P₀ P₁ hDiff0 hDiff1 splitX
hSplitX splitY
          hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD
₀mne
          hD₁mne (n := n) (k := k') (k' := k) hAjunk' hAjunk ⟨j, hj, hne⟩).1
        have hzAk : z ∈ P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX
splitY hSplitY n
            k) := by
          rw [hcs.1]
          exact (xStepG.fst_subset splitX A B (P₀.X n) bx) (hA1def ▸ hzA1)
        have hzAk' : z ∈ P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX
splitY hSplitY n
```

```
              k') :=
            yPseqAtomIdx.subset_atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
              hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne
    hD₁mne true
              hjunk' hz'
          exact absurd (Set.mem_inter hzAk' hzAk) (by rw [hdisj]; simp)
      rw [h1empty, hdisjYP]

end CombinedCode

section CombinedCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 1000000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 in
set_option maxHeartbeats 4000000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 in

theorem fst_succ_eq_YPseqCode (? : ℕ → Bool × Bool) (n : ℕ) (b : Bool) :
    (yStepG splitY
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).1
          (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 (P₀.X n) (? n).1).1
        (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).1
          (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 (P₀.X n) (? n).1).2
        (P₁.X n) b).1 =
      (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).1
          (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 (P₀.X n) (? n).1).1 ∩
        (if b then P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0 n)
          else D₀.master \
            P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n
    )) := by
  obtain ⟨ihAB, ihA, ihB⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁
    pos hD₁diff
    splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne ? n
  set A := (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).1 with hAdef
  set B := (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 with hBdef
```

```
set A1 := (xStepG splitX A B (P₀.X n) (? n).1).1 with hA1def
set B1 := (xStepG splitX A B (P₀.X n) (? n).1).2 with hB1def
set YP := P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n
  ) with hYPdef
have hspec1 := hxSplit ihAB ihB (P₀.X n)
have hA1B1 : A1 = ∅ ↔ B1 = ∅ := by
  rw [hA1def, hB1def]
  by_cases hbx : (? n).1 = true
  · simp only [xStepG, xyStep, hbx, ite_true]; exact hspec1.2.2.1
  · simp only [xStepG, xyStep, hbx, Bool.false_eq_true, ite_false]; exact hspec1
  .2.2.2.1
have hA1mem : A1 = ∅ ∨ D₀.mem A1 := by
  rw [hA1def]
  by_cases hbx : (? n).1 = true
  · simp only [xStepG, xyStep, hbx, ite_true]; exact inter.mem_or_empty hD₀pos ihA (P
  ₀.mem_X n)
  · simp only [xStepG, xyStep, hbx, Bool.false_eq_true, ite_false]
    exact diff.mem_or_empty hD₀diff ihA (P₀.mem_X n)
have hspec := hySplit hA1B1.symm hA1mem (P₁.X n)
have hJeqTrue : (yStepG splitY A1 B1 (P₁.X n) true).1 = A1 ∩ YP :=
  yStepG.fst_eq_inter_YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀
  pos hD₀diff
    hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 ? n (? n).1
by_cases hb : b = true
· rw [hb, ite_eq_left rfl]; exact hJeqTrue
· rw [Bool.not_eq_true] at hb; subst hb
  rw [ite_eq_right (by simp)]
  have hJeq : (yStepG splitY A1 B1 (P₁.X n) false).1 = A1 \ YP := by
    have hunion :
        (yStepG splitY A1 B1 (P₁.X n) true).1 ∪ (yStepG splitY A1 B1 (P₁.X n) false)
  .1 = A1 := by
      simp only [yStepG, xyStep, Prod.swap]; exact hspec.2.2.2.2.1
    have hinter :
        (yStepG splitY A1 B1 (P₁.X n) true).1 ∩ (yStepG splitY A1 B1 (P₁.X n) false)
  .1 = ∅ := by
      simp only [yStepG, xyStep, Prod.swap]; exact hspec.2.2.2.2.2
    ext x
    constructor
    · intro hxJ
      have hxA1 : x ∈ A1 := hunion ▶ Or.inr hxJ
      refine ⟨hxA1, fun hxYP => ?_⟩
      have hxI : x ∈ (yStepG splitY A1 B1 (P₁.X n) true).1 := hJeqTrue ▶ Set.
  mem_inter hxA1 hxYP
      exact absurd (Set.mem_inter hxI hxJ) (by rw [hinter]; simp)
    · rintro ⟨hxA1, hxnYP⟩
      rw [← hunion] at hxA1
      rcases hxA1 with hxI | hxJ
      · exact absurd (hJeqTrue ▶ hxI : x ∈ A1 ∩ YP).2 hxnYP
      · exact hxJ
  rw [hJeq]
  have hsub : A1 ⊆ D₀.master := (xStepG.fst_subset splitX A B (P₀.X n) (? n).1).trans
    (atomPairG.fst_subset_master D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos hD₁diff
  splitX hxSplit
      P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne ? n)
  ext x
  constructor
```

```
    · rintro ⟨hx1, hx2⟩; exact ⟨hx1, hsub hx1, hx2⟩
    · rintro ⟨hx1, -, hx2⟩; exact ⟨hx1, hx2⟩

end CombinedCode

end yStepG

end DomainTheory.NeighbourhoodSystems
```

combinedCode_more.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xStepG_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yStepG_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairG_more

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

namespace genAtom
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section CombinedCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hxSplit hD₁pos hD₁diff hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 4000000 in

theorem combinedXCode_succ_eq (? : ℕ → Bool × Bool) (n : ℕ)
    (hn : (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).1 =
      genAtom (combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0)
     D₀.master
        (combined? ?) (2 * n)) :
    genAtom (combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0) D
    ₀.master
```

```
        (combined? ?) (2 * n + 1) =
      (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 (P₀.X n) (? n).1).1 := by
  rw [genAtom.succ', ← hn, combined?_even, combinedXCode.even]
  have hAsub : (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).1 ⊆ D₀.master :=
    atomPairG.fst_subset_master D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos hD₁diff
    splitX hxSplit
      P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne ? n
  simp only [xStepG, xyStep]
  rcases Bool.eq_false_or_eq_true (? n).1 with hb | hb
  · simp only [hb, ite_true]
  · simp only [hb, Bool.false_eq_true, ite_false]
    exact inter.diff_eq_diff_of_subset hAsub

end CombinedCode

section CombinedCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion1 in
set_option maxHeartbeats 4000000 in

theorem combinedYCode_succ_eq (? : ℕ → Bool × Bool) (n : ℕ)
    (hn : (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 =
      genAtom (combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1)
     D₁.master
        (combined? ?) (2 * n)) :
    genAtom (combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1) D
    ₁.master
        (combined? ?) (2 * n + 1) =
      (xStepG splitX (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).1
        (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 (P₀.X n) (? n).1).2 := by
  rw [genAtom.succ', ← hn, combined?_even, combinedYCode.even]
  exact (xStepG.snd_succ_eq_XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
     hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion1 ? n
    (? n).1).symm

end CombinedCode

end genAtom
```

```
namespace atomPairG
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section CombinedCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion1 in
set_option maxHeartbeats 4000000 in

theorem snd_eq_genAtomCode (? : ℕ → Bool × Bool) (n : ℕ) :
    (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).2 =
      genAtom (combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1)
     D₁.master
        (combined? ?) (2 * n) := by
  induction n with
  | zero => rfl
  | succ n hIH =>
      have hodd := genAtom.combinedYCode_succ_eq P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
        hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion1 ? n
        hIH
      have h2 : 2 * (n + 1) = 2 * n + 1 + 1 := by ring
      rw [atomPairG.succ_eq, h2, genAtom.succ', combined?_odd, combinedYCode.odd, hodd
    ]
      obtain ⟨ihAB, -, ihB⟩ := atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit
    hD₁pos
        hD₁diff splitX hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne ? n
      have hB1sub := (xStepG.snd_subset hxSplit ihAB ihB (P₀.X n) (? n).1).trans
        (atomPairG.snd_subset_master D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos hD₁diff
    splitX
          hxSplit P₀.X P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne ? n)
      simp only [yStepG, xyStep, Prod.swap]
      rcases Bool.eq_false_or_eq_true (? n).2 with hb | hb
      · simp only [hb, ite_true]
      · simp only [hb, Bool.false_eq_true, ite_false]
        exact (inter.diff_eq_diff_of_subset hB1sub).symm

end CombinedCode

section CombinedCode
```

```
variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 1000000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 in
set_option maxHeartbeats 4000000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 in

theorem fst_eq_genAtomCode (? : ℕ → Bool × Bool) (n : ℕ) :
    (atomPairG D₀ D₁ splitY splitX P₀.X P₁.X ? n).1 =
      genAtom (combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0)
     D₀.master
        (combined? ?) (2 * n) := by
  induction n with
  | zero => rfl
  | succ n hIH =>
      have hodd := genAtom.combinedXCode_succ_eq P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
        hD₀pos hD₀diff hxSplit hD₁pos hD₁diff hySplit hD₀mne hD₁mne hUnion0 ? n hIH
      have hstep := yStepG.fst_succ_eq_YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
        hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 ? n
        (? n).2
      have h2 : 2 * (n + 1) = 2 * n + 1 + 1 := by ring
      rw [atomPairG.succ_eq, hstep, h2, genAtom.succ', combined?_odd, combinedXCode.
    odd, hodd]

end CombinedCode

end atomPairG

end DomainTheory.NeighbourhoodSystems
```

hcoreCode.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
```

```
    combinedCode_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    primrec812d_more

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

namespace hcoreCode
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section CombinedCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 1000000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 in
set_option maxHeartbeats 4000000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in

theorem even (?' : ℕ → Bool) (n : ℕ) :
    genAtom (combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0) D
    ₀.master ?'
        (2 * n) = ∅ ↔
      genAtom (combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1)
     D₁.master
        ?' (2 * n) = ∅ := by
  rw [← combined?_deinterleave? ?',
    ← atomPairG.fst_eq_genAtomCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hD₀pos hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 (
    deinterleave? ?') n,
    ← atomPairG.snd_eq_genAtomCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hD₀pos hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion1 (
    deinterleave? ?') n]
  exact (atomPairG.invariant D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos hD₁diff splitX
    hxSplit P₀.X
```

```
    P₁.X P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deinterleave? ?') n).1

end CombinedCode

section CombinedCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 1000000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 in
set_option maxHeartbeats 4000000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in

theorem odd (?' : ℕ → Bool) (n : ℕ) :
    genAtom (combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0) D
    ₀.master ?'
        (2 * n + 1) = ∅ ↔
      genAtom (combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1)
     D₁.master
        ?' (2 * n + 1) = ∅ := by
  rw [← combined?_deinterleave? ?',
    genAtom.combinedXCode_succ_eq P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀
    pos hD₀diff
      hxSplit hD₁pos hD₁diff hySplit hD₀mne hD₁mne hUnion0 (deinterleave? ?') n
      (atomPairG.fst_eq_genAtomCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
        (deinterleave? ?') n),
    genAtom.combinedYCode_succ_eq P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀
    pos hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion1 (
    deinterleave? ?') n
      (atomPairG.snd_eq_genAtomCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion1
        (deinterleave? ?') n)]
  exact (xStepG.spec D₀ D₁ hD₀pos hD₀diff splitY hySplit hD₁pos hD₁diff splitX hxSplit P
    ₀.X P₁.X
```

```
    P₀.mem_X P₁.mem_X hD₀mne hD₁mne (deinterleave? ?') n).1.symm

end CombinedCode

end hcoreCode
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section CombinedCode

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne in
set_option maxHeartbeats 1000000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 in
set_option maxHeartbeats 4000000 in

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in

theorem hcoreCode (?' : ℕ → Bool) (n : ℕ) :
    genAtom (combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0) D
    ₀.master ?'
        n = ∅ ↔
      genAtom (combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1)
     D₁.master
        ?' n = ∅ := by
  rcases (by omega : n % 2 = 0 ∨ n % 2 = 1) with hn | hn
  · rw [show n = 2 * (n / 2) from by omega]
    exact hcoreCode.even P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD₀
    diff hD₀nomin
      hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 ?' (n / 2)
  · rw [show n = 2 * (n / 2) + 1 from by omega]
    exact hcoreCode.odd P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD₀
    diff hD₀nomin
      hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 ?' (n / 2)

end CombinedCode

end DomainTheory.NeighbourhoodSystems
```

transfer.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.hcoreCode

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

namespace transfer
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section CombinedCodeTransfer

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in
theorem empty_combinedCode {cs : List (ℕ × Bool)} {n : ℕ} (hn : ∀ p ∈ cs, p.1 < n) :
    {x ∈ D₀.master | ∀ p ∈ cs,
        (p.2 = true ↔ x ∈ combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hUnion0
          p.1)}.Nonempty ↔
      {y ∈ D₁.master | ∀ p ∈ cs,
        (p.2 = true ↔ y ∈ combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hUnion1
          p.1)}.Nonempty := by
  have hc := hcoreCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD₀diff
     hD₀nomin
    hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1
  have hc' : ∀ ? n,
      genAtom (combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1)
     D₁.master
          ? n = ∅ ↔
        genAtom (combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0) D₀.master
          ? n = ∅ :=
    fun ? n => (hc ? n).symm
  exact ⟨transfer_dir (combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0)
      D₀.master (combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion1) D₁.master
```

```
      hc hn,
    transfer_dir (combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion1)
      D₁.master (combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0) D₀.master
      hc' hn⟩

end CombinedCodeTransfer

section CombinedCodeTransfer

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in
theorem double_subset_combinedCode (i j k : ℕ) :
    D₀.master ∩ combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
     i ∩
        combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 j ⊆
        combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 k ↔
      D₁.master ∩ combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion1 i ∩
          combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 j ⊆
        combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 k := by
  have key := transfer.empty_combinedCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
    hUnion1
    (cs := [(i, true), (j, true), (k, false)]) (n := max i (max j k) + 1)
    (by simp only [List.mem_cons, List.not_mem_nil, or_false]
        rintro p (rfl | rfl | rfl) <;>
          simp [(Nat.le_max_left j k).trans (Nat.le_max_right i (max j k)),
            (Nat.le_max_right j k).trans (Nat.le_max_right i (max j k))])
  have hLHS : {x ∈ D₀.master | ∀ p ∈ [(i, true), (j, true), (k, false)],
      (p.2 = true ↔ x ∈ combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hUnion0
        p.1)}
      = (D₀.master ∩ combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0 i ∩
          combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 j) \
        combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 k := by
    ext x
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
```

```
      forall_eq_or_imp, forall_eq, Set.mem_sdiff, Set.mem_inter_iff]
    tauto
  have hRHS : {y ∈ D₁.master | ∀ p ∈ [(i, true), (j, true), (k, false)],
      (p.2 = true ↔ y ∈ combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hUnion1
        p.1)}
      = (D₁.master ∩ combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion1 i ∩
          combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 j) \
        combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 k := by
    ext y
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_sdiff, Set.mem_inter_iff]
    tauto
  rw [hLHS, hRHS] at key
  rw [← Set.sdiff_eq_empty, ← Set.sdiff_eq_empty, ← Set.not_nonempty_iff_eq_empty,
    ← Set.not_nonempty_iff_eq_empty, not_iff_not]
  exact key

end CombinedCodeTransfer

section CombinedCodeTransfer

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in
theorem subset_combinedCode (i j : ℕ) :
    D₀.master ∩ combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
     i ⊆
        combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 j ↔
      D₁.master ∩ combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion1 i ⊆
        combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 j := by
  have key := transfer.empty_combinedCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
    hUnion1
    (cs := [(i, true), (j, false)]) (n := max i j + 1)
    (by simp only [List.mem_cons, List.not_mem_nil, or_false]
        rintro p (rfl | rfl) <;> simp)
  have hLHS : {x ∈ D₀.master | ∀ p ∈ [(i, true), (j, false)],
      (p.2 = true ↔ x ∈ combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
```

```
    hSplitY hUnion0
        p.1)}
      = (D₀.master ∩ combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0 i) \
        combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 j := by
    ext x
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_sdiff, Set.mem_inter_iff]
    tauto
  have hRHS : {y ∈ D₁.master | ∀ p ∈ [(i, true), (j, false)],
      (p.2 = true ↔ y ∈ combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hUnion1
        p.1)}
      = (D₁.master ∩ combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion1 i) \
        combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 j := by
    ext y
    simp only [Set.mem_ofPred_eq, List.mem_cons, List.not_mem_nil, or_false,
      forall_eq_or_imp, forall_eq, Set.mem_sdiff, Set.mem_inter_iff]
    tauto
  rw [hLHS, hRHS] at key
  rw [← Set.sdiff_eq_empty, ← Set.sdiff_eq_empty, ← Set.not_nonempty_iff_eq_empty,
    ← Set.not_nonempty_iff_eq_empty, not_iff_not]
  exact key

end CombinedCodeTransfer

section CombinedCodeTransfer

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in
theorem inter_eq_combinedCode (i j k : ℕ)
    (hi : combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 i ⊆ D
    ₀.master)
    (hk : combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 k ⊆ D
    ₀.master) :
    combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 i ∩
        combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 j =
        combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 k ↔
      combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 i ∩
          combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 j =
```

```
      combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 k := by
have h1 : combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 k ⊆
      combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 i ↔
    combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 k ⊆
      combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 i := by
  have := transfer.subset_combinedCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
  hSplitY hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
  hUnion1 k i
  rwa [Set.inter_eq_self_of_subset_right hk,
    Set.inter_eq_self_of_subset_right
      (combinedYCode.subset_master P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
  hUnion1
        k)] at this
have h2 : combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 k ⊆
      combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 j ↔
    combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 k ⊆
      combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 j := by
  have := transfer.subset_combinedCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
  hSplitY hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
  hUnion1 k j
  rwa [Set.inter_eq_self_of_subset_right hk,
    Set.inter_eq_self_of_subset_right
      (combinedYCode.subset_master P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
  hUnion1
        k)] at this
have h3 : combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 i ∩
      combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 j ⊆
      combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 k ↔
    combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 i ∩
        combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 j ⊆
      combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 k := by
  have := transfer.double_subset_combinedCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX
  splitY hSplitY
    hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
  hUnion0 hUnion1
    i j k
  rwa [Set.inter_eq_self_of_subset_right hi,
    Set.inter_eq_self_of_subset_right
      (combinedYCode.subset_master P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
  hUnion1
        i)] at this
constructor
· intro heq
  have hki : combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
  k ⊆
      combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 i :=
    heq ▶ Set.inter_subset_left
  have hkj : combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
  k ⊆
      combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 j :=
    heq ▶ Set.inter_subset_right
  have hijk : combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
   i ∩
      combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 j ⊆
```

```
        combinedXCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 k :=
    heq ▸ subset_rfl
    exact Set.Subset.antisymm (h3.mp hijk) (Set.subset_inter (h1.mp hki) (h2.mp hkj))
  · intro heq
    have hki : combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1
    k ⊆
        combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 i :=
      heq ▸ Set.inter_subset_left
    have hkj : combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1
    k ⊆
        combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 j :=
      heq ▸ Set.inter_subset_right
    have hijk : combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1
     i ∩
        combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 j ⊆
        combinedYCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 k :=
    heq ▸ subset_rfl
    exact Set.Subset.antisymm (h3.mpr hijk) (Set.subset_inter (h1.mpr hki) (h2.mpr hkj
    ))

end CombinedCodeTransfer

end transfer

end DomainTheory.NeighbourhoodSystems
```

combinedCodeCrossFamily.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.transfer
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    YPseqCode_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    XPseqCode_more

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

namespace YPseqCode
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section XYPseqCodeZero

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
```

```
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hX0 hY0 in

theorem zero :
    P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 0) = D₀.
    master := by
  have hjunk0 := atomPairJunk.zero P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0
  have hcs := atomPairCodeState.correct P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne 0 0 hjunk0
  have hA0 : P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0)
    =
      D₀.master := hcs.1
  have hB0 : P₁.X (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0)
    =
      D₁.master := hcs.2
  have hxjunk0 : xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0 =
    0 := by
    rw [xPseqAtomJunk.eq, hjunk0, selectFn_zero]
    by_contra hcon
    have hle := emptyInterDec.le_one P₀ (Nat.pair
      (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0) 0)
    have h1 : emptyInterDec P₀ (Nat.pair
        (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0) 0) = 1 :=
    by omega
    have hempty := (emptyInterDec.eq_one_iff P₀ hD₀pos hD₀nomin _ _).mp h1
    rw [hA0, hX0, Set.inter_self] at hempty
    exact hD₀mne.ne_empty hempty
  have hidxeq : xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0 =
      hSplitX.posIdx (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0
    0)
        (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0) 0 :=
    xPseqAtomIdx.eq P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hxjunk0
  have hAB1 : D₀.master = ∅ ↔ D₁.master = ∅ :=
    ⟨fun h => absurd h hD₀mne.ne_empty, fun h => absurd h hD₁mne.ne_empty⟩
  have hBE1 : D₁.master = ∅ ∨ D₁.mem D₁.master := Or.inr D₁.master_mem
  have hspec1 := hxSplit hAB1 hBE1 D₀.master
  have hdiff1 : D₀.master \ D₀.master = ∅ := Set.sdiff_self
  have h2empty1 : (splitX D₀.master D₁.master D₀.master).2 = ∅ := hspec1.2.2.2.1.mp
    hdiff1
  have hunion1 : (splitX D₀.master D₁.master D₀.master).1 = D₁.master := by
    have hu := hspec1.2.2.2.2.1
    rwa [h2empty1, Set.union_empty] at hu
  have hne1 : (splitX (P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY 0 0))
      (P₁.X (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0))
      (P₀.X 0)).1 = ∅ := by rw [hA0, hB0, hX0, hunion1]; exact hD₁mne.ne_empty
  have hposspec := hSplitX.posIdx_spec
    (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0)
    (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0) 0 hne1
  rw [hA0, hB0, hX0] at hposspec
```

```
have hzeroeq : P₁.X (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0
   0) =
    D₁.master := by rw [hidxeq, ← hposspec]; exact hunion1
have hidx0eq : stateIdx0 (xPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
  hSplitY 0 0) =
    P₀.inter (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0) 0
  :=
  xPseqAtomIdx0_eq P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hxjunk0
have hinterex : ∃ k, P₀.X k ⊆
    P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0) ∩ P₀.X
  0 :=
  ⟨atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0, by
    rw [hA0, hX0, Set.inter_self]⟩
have hidx0set : P₀.X (stateIdx0 (xPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX
  splitY
    hSplitY 0 0)) = D₀.master := by
  rw [hidx0eq, P₀.inter_spec hinterex, hA0, hX0, Set.inter_self]
have hstateIdx1 : stateIdx1 (xPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
   hSplitY
    0 0) = xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0 := rfl
have hraw : selectFn (stateJunk (xPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX
  splitY
    hSplitY 0 0)) 1 (selectFn 1
      (emptyInterDec P₁ (Nat.pair (stateIdx1 (xPseqAtomState P₀ P₁ hDiff0 hDiff1
  splitX hSplitX
        splitY hSplitY 0 0)) 0))
      (IsComputableDiff.emptyDiffDec P₁ hDiff1 (Nat.pair (stateIdx1 (xPseqAtomState P
  ₀ P₁ hDiff0 hDiff1 splitX
        hSplitX splitY hSplitY 0 0)) 0))) = 0 := by
  have hxjunk0' : stateJunk (xPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
   hSplitY
      0 0) = 0 := hxjunk0
  rw [hxjunk0', selectFn_zero, selectFn_one, hstateIdx1]
  by_contra hcon
  have hle := emptyInterDec.le_one P₁ (Nat.pair
    (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0) 0)
  have h1 : emptyInterDec P₁ (Nat.pair
      (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0) 0) = 1 :=
  by omega
  have hempty := (emptyInterDec.eq_one_iff P₁ hD₁pos hD₁nomin _ _).mp h1
  rw [hzeroeq, hY0, Set.inter_self] at hempty
  exact hD₁mne.ne_empty hempty
have hyidx0raw := ySubStep.idx0_eq P₀ P₁ hDiff1 splitY hSplitY (h := hraw)
rw [selectFn_one, hstateIdx1] at hyidx0raw
have hyidxeq : yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0 1 =
    hSplitY.posIdx (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0
  0)
      (stateIdx0 (xPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0
  0)) 0 :=
  hyidx0raw
have hyjunkeq : yPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0 1
   = 0 := by
  show stateJunk (ySubStep P₀ P₁ hDiff1 splitY hSplitY (Nat.pair 0 (Nat.pair 1
    (xPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0)))) = 0
  rw [ySubStep.junk_eq]; exact hraw
have hAB2 : D₁.master = ∅ ↔ D₀.master = ∅ := hAB1.symm
```

```
  have hBE2 : D₀.master = ∅ ∨ D₀.mem D₀.master := Or.inr D₀.master_mem
  have hspec2 := hySplit hAB2 hBE2 D₁.master
  have hdiff2 : D₁.master \ D₁.master = ∅ := Set.sdiff_self
  have h2empty2 : (splitY D₁.master D₀.master D₁.master).2 = ∅ := hspec2.2.2.2.1.mp
    hdiff2
  have hunion2 : (splitY D₁.master D₀.master D₁.master).1 = D₀.master := by
    have hu := hspec2.2.2.2.2.1
    rwa [h2empty2, Set.union_empty] at hu
  have hne2 : (splitY
      (P₁.X (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0))
      (P₀.X (stateIdx0 (xPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY 0 0)))
      (P₁.X 0)).1 = ∅ := by rw [hzeroeq, hidx0set, hY0, hunion2]; exact hD₀mne.ne_empty
  have hposspec2 := hSplitY.posIdx_spec
    (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0)
    (stateIdx0 (xPseqAtomState P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0))
    0 hne2
  rw [hzeroeq, hidx0set, hY0] at hposspec2
  have hyzeroeq : P₀.X (yPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    0 0 1) =
      D₀.master := by rw [hyidxeq, ← hposspec2]; exact hunion2
  apply Set.Subset.antisymm
  · intro z hz
    rcases (mem_YPseqCode_iff_unconditional P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
      hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 0
      z).mp hz with ⟨i, -, -, hzi⟩ | ⟨i, -, -, hzi⟩
    · exact D₀.sub_master
        (yPseqAtomIdx.mem P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 i 0) hzi
    · exact D₀.sub_master
        (yPseqAtomIdx.mem P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 i 1) hzi
  · intro z hz
    refine (mem_YPseqCode_iff_unconditional P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
      hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 0
      z).mpr (Or.inr ⟨0, by norm_num, hyjunkeq, ?_⟩)
    rwa [hyzeroeq]

end XYPseqCodeZero

section CombinedCodeCrossFamily

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
```

```
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in

theorem subset_X_iff_Y_subset_XPseqCode (i j : ℕ) :
    P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 i) ⊆ P₀.X
     j ↔
      P₁.X i ⊆ P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion1 j) := by
  have key := transfer.subset_combinedCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
    hUnion1
    (2 * i + 1) (2 * j)
  rw [combinedXCode.odd, combinedXCode.even, combinedYCode.odd, combinedYCode.even,
    Set.inter_eq_self_of_subset_right
      (D₀.sub_master (P₀.mem_X
        (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 i))),
    Set.inter_eq_self_of_subset_right (D₁.sub_master (P₁.mem_X i))] at key
  exact key

end CombinedCodeCrossFamily

section CombinedCodeTransfer

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in
theorem inter_eq_iff_Y_inter_eq (i j k : ℕ) :
    P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 i) ∩
        P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 j) =
        P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 k) ↔
      P₁.X i ∩ P₁.X j = P₁.X k := by
  have key := transfer.inter_eq_combinedCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
    hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 hUnion1
    (2 * i + 1) (2 * j + 1) (2 * k + 1)
    (combinedXCode.subset_master P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0
```

```
      (2 * i + 1))
    (combinedXCode.subset_master P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0
      (2 * k + 1))
  rw [combinedXCode.odd, combinedXCode.odd, combinedXCode.odd, combinedYCode.odd,
    combinedYCode.odd, combinedYCode.odd] at key
  exact key

end CombinedCodeTransfer

end YPseqCode
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section CombinedCodeCrossFamily

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in

theorem X_subset_YPseqCode_iff_XPseqCode_subset_Y (i j : ℕ) :
    P₀.X i ⊆ P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
    j) ↔
      P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 i) ⊆ P₁
    .X j := by
  have key := transfer.subset_combinedCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
    hUnion1 (2 * i)
    (2 * j + 1)
  rw [combinedXCode.even, combinedXCode.odd, combinedYCode.even, combinedYCode.odd,
    Set.inter_eq_self_of_subset_right (D₀.sub_master (P₀.mem_X i)),
    Set.inter_eq_self_of_subset_right
      (D₁.sub_master (P₁.mem_X
        (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 i)))] at
    key
  exact key

end CombinedCodeCrossFamily

section CombinedCodeTransfer

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
```

```
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in
theorem X_subset_iff_XPseqCode_subset (i j : ℕ) :
    P₀.X i ⊆ P₀.X j ↔
      P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 i) ⊆
        P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 j) :=
     by
  have key := transfer.subset_combinedCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
    hUnion1 (2 * i)
    (2 * j)
  rw [combinedXCode.even, combinedXCode.even, combinedYCode.even, combinedYCode.even,
    Set.inter_eq_self_of_subset_right (D₀.sub_master (P₀.mem_X i)),
    Set.inter_eq_self_of_subset_right
      (D₁.sub_master (P₁.mem_X
        (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 i)))] at
    key
  exact key

end CombinedCodeTransfer

section XEqIffXPseqCodeEq

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in
```

```
theorem X_eq_iff_XPseqCode_eq (i j : ℕ) :
    P₀.X i = P₀.X j ↔
      P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 i) =
        P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 j) :=
     by
  constructor
  · intro h
    exact Set.Subset.antisymm
      ((X_subset_iff_XPseqCode_subset P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
     hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
    hUnion1 i
        j).mp h.subset)
      ((X_subset_iff_XPseqCode_subset P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
     hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
    hUnion1 j
        i).mp h.symm.subset)
  · intro h
    exact Set.Subset.antisymm
      ((X_subset_iff_XPseqCode_subset P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
     hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
    hUnion1 i
        j).mpr h.subset)
      ((X_subset_iff_XPseqCode_subset P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
     hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
    hUnion1 j
        i).mpr h.symm.subset)

end XEqIffXPseqCodeEq

section CombinedCodeTransfer

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in
theorem X_inter_eq_iff_XPseqCode_inter_eq (i j k : ℕ) :
    P₀.X i ∩ P₀.X j = P₀.X k ↔
      P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 i) ∩
          P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 j)
```

```
    =
        P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 k) :=
     by
  have key := transfer.inter_eq_combinedCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
    hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 hUnion1
    (2 * i) (2 * j) (2 * k)
    (combinedXCode.subset_master P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0 (2 * i))
    (combinedXCode.subset_master P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0 (2 * k))
  rw [combinedXCode.even, combinedXCode.even, combinedXCode.even, combinedYCode.even,
    combinedYCode.even, combinedYCode.even] at key
  exact key

end CombinedCodeTransfer

namespace XPseqCode
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section XYPseqCodeZero

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hX0 in

theorem zero :
    P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 0) = D₁.
    master := by
  have hjunk0 := atomPairJunk.zero P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0
  have hcs := atomPairCodeState.correct P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne 0 0 hjunk0
  have hA0 : P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0)
    =
      D₀.master := hcs.1
  have hB0 : P₁.X (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0)
    =
      D₁.master := hcs.2
  have hxjunk0 : xPseqAtomJunk P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0 =
    0 := by
```

```
    rw [xPseqAtomJunk.eq, hjunk0, selectFn_zero]
    by_contra hcon
    have hle := emptyInterDec.le_one P₀ (Nat.pair
      (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0) 0)
    have h1 : emptyInterDec P₀ (Nat.pair
        (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0) 0) = 1 :=
    by omega
    have hempty := (emptyInterDec.eq_one_iff P₀ hD₀pos hD₀nomin _ _).mp h1
    rw [hA0, hX0, Set.inter_self] at hempty
    exact hD₀mne.ne_empty hempty
  have hidxeq : xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0 =
      hSplitX.posIdx (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0
    0)
        (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0) 0 :=
    xPseqAtomIdx.eq P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hxjunk0
  have hAB1 : D₀.master = ∅ ↔ D₁.master = ∅ :=
    ⟨fun h => absurd h hD₀mne.ne_empty, fun h => absurd h hD₁mne.ne_empty⟩
  have hBE1 : D₁.master = ∅ ∨ D₁.mem D₁.master := Or.inr D₁.master_mem
  have hspec1 := hxSplit hAB1 hBE1 D₀.master
  have hdiff1 : D₀.master \ D₀.master = ∅ := Set.sdiff_self
  have h2empty1 : (splitX D₀.master D₁.master D₀.master).2 = ∅ := hspec1.2.2.2.1.mp
    hdiff1

  have hunion1 : (splitX D₀.master D₁.master D₀.master).1 = D₁.master := by
    have hu := hspec1.2.2.2.2.1
    rwa [h2empty1, Set.union_empty] at hu
  have hne1 : (splitX (P₀.X (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY 0 0))
      (P₁.X (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0))
      (P₀.X 0)).1 = ∅ := by rw [hA0, hB0, hX0, hunion1]; exact hD₁mne.ne_empty
  have hposspec := hSplitX.posIdx_spec
    (atomPairIdx0 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0)
    (atomPairIdx1 P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0 0) 0 hne1
  rw [hA0, hB0, hX0] at hposspec
  have hzeroeq : P₁.X (xPseqAtomIdx P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY 0
     0) =
      D₁.master := by rw [hidxeq, ← hposspec]; exact hunion1
  apply Set.Subset.antisymm
  · intro z hz
    obtain ⟨i, -, -, hzi⟩ := (mem_XPseqCode_iff_unconditional P₀ P₁ hDiff0 hDiff1 splitX
     hSplitX
      splitY hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀
    mne hD₁mne
      hUnion1 0 z).mp hz
    exact D₁.sub_master (xPseqAtomIdx.mem P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY 0 i) hzi
  · intro z hz
    refine (mem_XPseqCode_iff_unconditional P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
      hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion1 0
      z).mpr ⟨0, by norm_num, hxjunk0, ?_⟩
    rwa [hzeroeq]

end XYPseqCodeZero
```

```
section CombinedCodeCrossFamily

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in

theorem eq_Y_iff_X_eq_YPseqCode (j k : ℕ) :
    P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 j) = P₁.X
     k ↔
      P₀.X j = P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0 k) := by
  constructor
  · intro h
    exact Set.Subset.antisymm
      ((X_subset_YPseqCode_iff_XPseqCode_subset_Y P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY
        hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne
    hD₁mne
        hUnion0 hUnion1 j k).mpr h.subset)
      ((YPseqCode.subset_X_iff_Y_subset_XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY
        hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne
    hD₁mne
        hUnion0 hUnion1 k j).mpr h.symm.subset)
  · intro h
    exact Set.Subset.antisymm
      ((X_subset_YPseqCode_iff_XPseqCode_subset_Y P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY
        hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne
    hD₁mne
        hUnion0 hUnion1 j k).mp h.subset)
      ((YPseqCode.subset_X_iff_Y_subset_XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY
        hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne
    hD₁mne
        hUnion0 hUnion1 k j).mp h.symm.subset)

end CombinedCodeCrossFamily

end XPseqCode

end DomainTheory.NeighbourhoodSystems
```

toD1Code.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedCodeCrossFamily

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

namespace toD1Code
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section ToD1CodeUpMem

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in

theorem up_mem (x : D₀.Element) {T1 T2 : Set β}
    (h1 : ∃ n, T1 = P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion1 n) ∧
      x.mem (P₀.X n))
    (hD1T2 : D₁.mem T2) (hT1T2 : T1 ⊆ T2) :
    ∃ n, T2 = P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1
     n) ∧
      x.mem (P₀.X n) := by
  obtain ⟨i, rfl, hxi⟩ := h1
  obtain ⟨k, hk⟩ := P₁.surj hD1T2
  subst hk
  have hsub : P₀.X i ⊆
      P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 k) :=
    (X_subset_YPseqCode_iff_XPseqCode_subset_Y P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
      hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 hUnion1
      i k).mpr hT1T2
  have hxYk :
      x.mem (P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
    k)) :=
    x.up_mem hxi
```

```
      (YPseqCode.mem_unconditional P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD
    ₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 k
    )
      hsub
  refine ⟨YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 k, ?_,
    hxYk⟩
  exact ((XPseqCode.eq_Y_iff_X_eq_YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
    hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 hUnion1
    (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 k) k).mpr rfl)
    .symm

end ToD1CodeUpMem

end toD1Code
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section ToD1Code

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 hX0 in

def toD1Code (x : D₀.Element) : D₁.Element where
  mem T := ∃ n, T = P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion1 n) ∧
    x.mem (P₀.X n)
  sub := fun ⟨n, hn, _⟩ =>
    hn ▶ XPseqCode.mem_unconditional P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hD₀pos
      hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion1 n
  master_mem := ⟨0, (XPseqCode.zero P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion1 hX0).
    symm,
    by rw [hX0]; exact x.master_mem⟩
  inter_mem := by
    rintro T1 T2 ⟨i, rfl, hxi⟩ ⟨j, rfl, hxj⟩
    have hDmem : D₀.mem (P₀.X i ∩ P₀.X j) := x.sub (x.inter_mem hxi hxj)
```

```
    obtain ⟨m, hm⟩ := P₀.surj hDmem
    have hcons : ∃ k, P₀.X k ⊆ P₀.X i ∩ P₀.X j := ⟨m, hm.le⟩
    have hinterEq : P₀.X (P₀.inter i j) = P₀.X i ∩ P₀.X j := P₀.inter_spec hcons
    refine ⟨P₀.inter i j, ?_, ?_⟩
    · exact (X_inter_eq_iff_XPseqCode_inter_eq P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
        hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
        hUnion1 i j (P₀.inter i j)).mp hinterEq.symm
    · rw [hinterEq]; exact x.inter_mem hxi hxj
  up_mem := toD1Code.up_mem P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD
    ₀diff
    hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 x

end ToD1Code

end DomainTheory.NeighbourhoodSystems
```

toD0Code.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.toD1Code

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

namespace toD0Code
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section ToD0CodeUpMem

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 in

theorem up_mem (y : D₁.Element) {S1 S2 : Set α}
    (h1 : ∃ n, S1 = P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0 n) ∧
      y.mem (P₁.X n))
```

```
    (hD0S2 : D₀.mem S2) (hS1S2 : S1 ⊆ S2) :
    ∃ n, S2 = P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0
     n) ∧
      y.mem (P₁.X n) := by
  obtain ⟨i, rfl, hyi⟩ := h1
  obtain ⟨k, hk⟩ := P₀.surj hD0S2
  subst hk
  have hsub : P₁.X i ⊆
      P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 k) :=
    (YPseqCode.subset_X_iff_Y_subset_XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
      hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 hUnion1
      i k).mp hS1S2
  have hyXk :
      y.mem (P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1
    k)) :=
    y.up_mem hyi
      (XPseqCode.mem_unconditional P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD
    ₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion1 k
    )
      hsub
  refine ⟨XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 k, ?_,
    hyXk⟩
  exact (XPseqCode.eq_Y_iff_X_eq_YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY
    hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0 hUnion1
    k (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 k)).mp rfl

end ToD0CodeUpMem

end toD0Code
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section ToD0Code

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 hX0 hY0 in
```

```
def toD0Code (y : D₁.Element) : D₀.Element where
  mem S := ∃ n, S = P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0 n) ∧
    y.mem (P₁.X n)
  sub := fun ⟨n, hn, _⟩ =>
    hn ▸ YPseqCode.mem_unconditional P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hD₀pos
      hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 n
  master_mem := ⟨0, (YPseqCode.zero P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hX0
    hY0).symm,
    by rw [hY0]; exact y.master_mem⟩
  inter_mem := by
    rintro S1 S2 ⟨i, rfl, hyi⟩ ⟨j, rfl, hyj⟩
    have hDmem : D₁.mem (P₁.X i ∩ P₁.X j) := y.sub (y.inter_mem hyi hyj)
    obtain ⟨m, hm⟩ := P₁.surj hDmem
    have hcons : ∃ k, P₁.X k ⊆ P₁.X i ∩ P₁.X j := ⟨m, hm.1e⟩
    have hinterEq : P₁.X (P₁.inter i j) = P₁.X i ∩ P₁.X j := P₁.inter_spec hcons
    refine ⟨P₁.inter i j, ?_, ?_⟩
    · exact (YPseqCode.inter_eq_iff_Y_inter_eq P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY hSplitY
        hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
        hUnion1 i j (P₁.inter i j)).mpr hinterEq.symm
    · rw [hinterEq]; exact y.inter_mem hyi hyj
  up_mem := toD0Code.up_mem P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD
    ₀diff
    hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 y

end ToD0Code

namespace toD0Code
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section ToD0CodeToD1Code

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 hX0 hY0 in
```

```
theorem toD1Code (x : D₀.Element) :
    toD0Code P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD₀diff hD₀nomin
    hxSplit
      hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0 hY0
      (_root_.DomainTheory.NeighbourhoodSystems.toD1Code P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY hSplitY hD₀pos hD₀diff hD₀nomin hxSplit
        hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0 x) = x := by
  apply Element.ext
  intro S
  constructor
  · rintro ⟨m, hS, n, hmn, hxn⟩
    have hXeq : P₀.X n =
        P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 m) :=
      (XPseqCode.eq_Y_iff_X_eq_YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
    hUnion1 n
        m).mp hmn.symm
    rw [hS, ← hXeq]
    exact hxn
  · intro hxS
    obtain ⟨n, hn⟩ := P₀.surj (x.sub hxS)
    subst hn
    exact ⟨XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n,
      (XPseqCode.eq_Y_iff_X_eq_YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
    hUnion1 n
        (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n)).mp rfl
    ,
      n, rfl, hxS⟩

end ToD0CodeToD1Code

end toD0Code
namespace toD1Code
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section ToD1CodeToD0Code

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)
```

```
include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 hX0 hY0 in

theorem toD0Code (y : D₁.Element) :
    toD1Code P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD₀diff hD₀nomin
    hxSplit
      hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
      (_root_.DomainTheory.NeighbourhoodSystems.toD0Code P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY hSplitY hD₀pos hD₀diff hD₀nomin hxSplit
        hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0 hY0 y) = y :=
    by
  apply Element.ext
  intro T
  constructor
  · rintro ⟨m, hT, n, hmn, hyn⟩
    have hYeq : P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion1 m) =
        P₁.X n :=
      (XPseqCode.eq_Y_iff_X_eq_YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
    hUnion1 m
        n).mpr hmn
    rw [hT, hYeq]
    exact hyn
  · intro hyT
    obtain ⟨n, hn⟩ := P₁.surj (y.sub hyT)
    subst hn
    exact ⟨YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n,
      ((XPseqCode.eq_Y_iff_X_eq_YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY
    hSplitY hD₀pos
        hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
    hUnion1
        (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 n) n).mpr
    rfl).symm,
      n, rfl, hyT⟩

end ToD1CodeToD0Code

end toD1Code

end DomainTheory.NeighbourhoodSystems
```

domainIsoCode812d.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.toD0Code
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.toD1Code

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
```

```
section DomainIsoCode812d

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 hX0 hY0 in

noncomputable def domainIsoCode812d : DomainIso D₀ D₁ where
  toFun := toD1Code P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD₀diff hD₀
    nomin
    hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
  invFun := toD0Code P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD₀diff
    hD₀nomin
    hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0 hY0
  left_inv := toD0Code.toD1Code P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀
    pos hD₀diff
    hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
    hY0
  right_inv := toD1Code.toD0Code P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀
    pos hD₀diff
    hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
    hY0
  map_rel_iff' := by
    intro x x2
    constructor
    · intro hle S hxS
      obtain ⟨n, hn⟩ := P₀.surj (x.sub hxS)
      subst hn
      obtain ⟨k, hk, hx2k⟩ := hle _
        (⟨n, rfl, hxS⟩ : (toD1Code P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀
    pos
          hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
     hUnion1
          hX0 x).mem
          (P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 n)
    ))
      rw [(X_eq_iff_XPseqCode_eq P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀
    pos hD₀diff
        hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 n
     k).mpr hk]
      exact hx2k
    · intro hle T hT
```

```
      obtain ⟨n, hn, hxn⟩ := hT
      exact ⟨n, hn, hle _ hxn⟩

end DomainIsoCode812d

namespace toD0Code
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section ToD0CodeRelIff

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 hX0 hY0 in

theorem rel_iff (m n : ℕ) :
    (ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos
    hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
      hY0).symm).rel (P₁.X m) (P₀.X n) ↔
    ∃ k, P₀.X n = P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion0 k) ∧
      P₁.X m ⊆ P₁.X k := by
  show (∃ _ : D₁.mem (P₁.X m),
      (toD0Code P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD₀diff hD₀
    nomin hxSplit
        hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0 hY0
        (D₁.principal (P₁.mem_X m))).mem (P₀.X n)) ↔ _
  simp only [toD0Code, mem_principal]
  constructor
  · rintro ⟨-, k, hk, -, hsub⟩
    exact ⟨k, hk, hsub⟩
  · rintro ⟨k, hk, hsub⟩
    exact ⟨P₁.mem_X m, k, hk, P₁.mem_X k, hsub⟩

end ToD0CodeRelIff

end toD0Code
namespace toD1Code
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section ToD1CodeRelIff
```

```
variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 hX0 hY0 in

theorem rel_iff (n m : ℕ) :
    (ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos
    hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
     hY0)).rel
      (P₀.X n) (P₁.X m) ↔
    ∃ k, P₁.X m = P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hUnion1 k) ∧
      P₀.X n ⊆ P₀.X k := by
  show (∃ _ : D₀.mem (P₀.X n),
      (toD1Code P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD₀diff hD₀
    nomin hxSplit
        hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
        (D₀.principal (P₀.mem_X n))).mem (P₁.X m)) ↔ _
  simp only [toD1Code, mem_principal]
  constructor
  · rintro ⟨-, k, hk, -, hsub⟩
    exact ⟨k, hk, hsub⟩
  · rintro ⟨k, hk, hsub⟩
    exact ⟨P₀.mem_X n, k, hk, P₀.mem_X k, hsub⟩

end ToD1CodeRelIff

end toD1Code
namespace domainIsoCode812d
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section DomainIsoCode812dSymmIsComputableMap

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
```

```
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 hX0 hY0 in

theorem symm_isComputableMap :
    ComputableMap P₁ P₀ (ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY
      hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁
    mne hUnion0
      hUnion1 hX0 hY0).symm) := by
  constructor
  have hg : Nat.Primrec (fun w : ℕ => Nat.pair w.unpair.2.unpair.2
      (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 w.unpair.1))
     :=
    Nat.Primrec.pair (Nat.Primrec.right.comp Nat.Primrec.right)
      ((primrec.YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0).
    comp
        Nat.Primrec.left)
  have hh : Nat.Primrec (fun w : ℕ => Nat.pair w.unpair.2.unpair.1 w.unpair.1) :=
    Nat.Primrec.pair (Nat.Primrec.left.comp Nat.Primrec.right) Nat.Primrec.left
  have hA : RecDecidable (fun w : ℕ => P₀.X w.unpair.2.unpair.2 =
      P₀.X (YPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion0 w.
    unpair.1)) := by
    refine RecDecidable.of_iff (fun w => ?_) (P₀.eq_computable.comp hg)
    simp only [unpair_pair_fst, unpair_pair_snd]
  have hB : RecDecidable (fun w : ℕ => P₁.X w.unpair.2.unpair.1 ⊆ P₁.X w.unpair.1) :=
    by
    refine RecDecidable.of_iff (fun w => ?_) (P₁.incl_computable.comp hh)
    simp only [unpair_pair_fst, unpair_pair_snd]
  refine REPred.of_iff (fun t => ?_) (hA.and hB).re.proj
  show (ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀
    pos hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
      hY0).symm).rel (P₁.X t.unpair.1) (P₀.X t.unpair.2) ↔ _
  rw [toD0Code.rel_iff]
  constructor
  · rintro ⟨k, hk, hsub⟩
    exact ⟨k, by simp only [unpair_pair_fst, unpair_pair_snd]; exact ⟨hk, hsub⟩⟩
  · rintro ⟨k, hk⟩
    simp only [unpair_pair_fst, unpair_pair_snd] at hk
    exact ⟨k, hk.1, hk.2⟩

end DomainIsoCode812dSymmIsComputableMap

section DomainIsoCode812dIsComputableMap

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
```

```
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 hX0 hY0 in

theorem isComputableMap :
    ComputableMap P₀ P₁ (ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX
    splitY
      hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁
    mne hUnion0
      hUnion1 hX0 hY0)) := by
  constructor
  have hg : Nat.Primrec (fun w : ℕ => Nat.pair w.unpair.2.unpair.2
      (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 w.unpair.1))
     :=
    Nat.Primrec.pair (Nat.Primrec.right.comp Nat.Primrec.right)
      ((primrec.XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1).
    comp
        Nat.Primrec.left)
  have hh : Nat.Primrec (fun w : ℕ => Nat.pair w.unpair.2.unpair.1 w.unpair.1) :=
    Nat.Primrec.pair (Nat.Primrec.left.comp Nat.Primrec.right) Nat.Primrec.left
  have hA : RecDecidable (fun w : ℕ => P₁.X w.unpair.2.unpair.2 =
      P₁.X (XPseqCode P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hUnion1 w.
    unpair.1)) := by
    refine RecDecidable.of_iff (fun w => ?_) (P₁.eq_computable.comp hg)
    simp only [unpair_pair_fst, unpair_pair_snd]
  have hB : RecDecidable (fun w : ℕ => P₀.X w.unpair.2.unpair.1 ⊆ P₀.X w.unpair.1) :=
    by
    refine RecDecidable.of_iff (fun w => ?_) (P₀.incl_computable.comp hh)
    simp only [unpair_pair_fst, unpair_pair_snd]
  refine REPred.of_iff (fun t => ?_) (hA.and hB).re.proj
  show (ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀
    pos hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
     hY0)).rel
      (P₀.X t.unpair.1) (P₁.X t.unpair.2) ↔ _
  rw [toD1Code.rel_iff]
  constructor
  · rintro ⟨k, hk, hsub⟩
    exact ⟨k, by simp only [unpair_pair_fst, unpair_pair_snd]; exact ⟨hk, hsub⟩⟩
  · rintro ⟨k, hk⟩
    simp only [unpair_pair_fst, unpair_pair_snd] at hk
    exact ⟨k, hk.1, hk.2⟩
```

```
end DomainIsoCode812dIsComputableMap

end domainIsoCode812d

end DomainTheory.NeighbourhoodSystems
```

effectiveIso812d.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    domainIso812c
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomE
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.deltaPair
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.xStepG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.yStepG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.atomPairG
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairG_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairCodeState
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    atomPairJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomIdx
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XFold
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    YFoldInner
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.XPseqCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.YPseqCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomJunk
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomIdx
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableDiff
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableSplit
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    IsComputableUnion
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    ComputableBisection
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Theorem_7_5
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Exercise_3_26
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d_early
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d_early_more
```

```
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    primrec812d
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    primrec812d_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedCode_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.Udiff
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    domainIsoCode812d
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.toD0Code
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.toD1Code
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    combinedCodeCrossFamily
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.transfer
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.hcoreCode
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yStepG_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    yPseqAtomIdx_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xStepG_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    xPseqAtomIdx_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    YPseqCode_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    XPseqCode_more

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

section
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

section
open NeighborhoodSystem Domain.Recursive ApproximableMap Exercise718

def NeighborhoodSystem.UnionClosed {α : Type*} (D : NeighborhoodSystem α) : Prop :=
  ∀ {X Y : Set α}, D.mem X → D.mem Y → D.mem (X ∪ Y)

section InvMapComp812d

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
```

```
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 hX0 hY0 in

theorem invMap_comp_toMap :
    (ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos
    hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
      hY0).symm).comp
    (ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos
    hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
     hY0)) =
    idMap D₀ := by
  apply ext_of_toElementMap
  intro x
  rw [toElementMap_comp]
  show (ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀
    pos hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
      hY0).symm).toElementMap
    ((ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos
     hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
      hY0)).toElementMap x) = _
  rw [toElementMap_ofIso, toElementMap_ofIso, OrderIso.symm_apply_apply,
    toElementMap_idMap]

end InvMapComp812d

section ToMapComp812d

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)
```

```
include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 hX0 hY0 in

theorem toMap_comp_invMap :
    (ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos
    hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
     hY0)).comp
    (ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos
    hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
      hY0).symm) =
    idMap D₁ := by
  apply ext_of_toElementMap
  intro y
  rw [toElementMap_comp]
  show (ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀
    pos hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
      hY0)).toElementMap
    ((ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos
     hD₀diff
      hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
      hY0).symm).toElementMap y) = _
  rw [toElementMap_ofIso, toElementMap_ofIso, OrderIso.apply_symm_apply,
    toElementMap_idMap]

end ToMapComp812d

section EffectiveIso812d

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)

include hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne
    hUnion0
  hUnion1 hX0 hY0 in

noncomputable def effectiveIso812d : EffectiveIso P₀ P₁ where
  toMap := ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
```

```
    hUnion1 hX0 hY0)
  invMap := ofIso (domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY
    hD₀pos
    hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0
    hUnion1 hX0
    hY0).symm
  toMap_computable := domainIsoCode812d.isComputableMap P₀ P₁ hDiff0 hDiff1 splitX
    hSplitX splitY
    hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁
    mne hUnion0
    hUnion1 hX0 hY0
  invMap_computable := domainIsoCode812d.symm_isComputableMap P₀ P₁ hDiff0 hDiff1
    splitX hSplitX
    splitY hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀
    mne hD₁mne
    hUnion0 hUnion1 hX0 hY0
  left_inv := invMap_comp_toMap P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀
    pos hD₀diff
    hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
    hY0
  right_inv := toMap_comp_invMap P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀
    pos hD₀diff
    hD₀nomin hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0
    hY0

end EffectiveIso812d

section DomainIsoCode812d

variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)

include hDiff0 hDiff1 hSplitX hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁
    nomin
  hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0 hY0 in

theorem isomorphic_812d : D₀ ≅? D₁ :=
  ⟨domainIsoCode812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD₀diff hD
    ₀nomin
    hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0 hY0⟩

end DomainIsoCode812d

section EffectiveIso812d
```

```
variable {α β : Type*} {D₀ : NeighborhoodSystem α} {D₁ : NeighborhoodSystem β}
  (P₀ : ComputablePresentation D₀) (P₁ : ComputablePresentation D₁)
  (hDiff0 : IsComputableDiff P₀) (hDiff1 : IsComputableDiff P₁)
  (splitX : Set α → Set β → Set α → Set β × Set β) (hSplitX : IsComputableSplit P₀ P
    ₁ splitX)
  (splitY : Set β → Set α → Set β → Set α × Set α) (hSplitY : IsComputableSplit P₁ P
    ₀ splitY)
  (hD₀pos : D₀.IsPositive) (hD₀diff : D₀.DiffClosed) (hD₀nomin : D₀.NoMinimal)
  (hxSplit : SplitSpec' D₁ splitX)
  (hD₁pos : D₁.IsPositive) (hD₁diff : D₁.DiffClosed) (hD₁nomin : D₁.NoMinimal)
  (hySplit : SplitSpec' D₀ splitY)
  (hD₀mne : D₀.master.Nonempty) (hD₁mne : D₁.master.Nonempty)
  (hUnion0 : IsComputableUnion P₀) (hUnion1 : IsComputableUnion P₁)
  (hX0 : P₀.X 0 = D₀.master) (hY0 : P₁.X 0 = D₁.master)

include hDiff0 hDiff1 hSplitX hSplitY hD₀pos hD₀diff hD₀nomin hxSplit hD₁pos hD₁diff hD₁
    nomin
  hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0 hY0 in

theorem effectivelyIsomorphic_812d : EffectivelyIsomorphic P₀ P₁ :=
  ⟨effectiveIso812d P₀ P₁ hDiff0 hDiff1 splitX hSplitX splitY hSplitY hD₀pos hD₀diff hD₀
    nomin
    hxSplit hD₁pos hD₁diff hD₁nomin hySplit hD₀mne hD₁mne hUnion0 hUnion1 hX0 hY0⟩
end EffectiveIso812d

end

open Domain.Recursive NeighborhoodSystem
```

effectiveIso812_UV.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.Vunion
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    effectiveIso812d
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_18
public import Mathlib.Combinatorics.Colex
public import Mathlib.Data.Nat.Bitwise
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open Domain.Recursive NeighborhoodSystem Exercise718

noncomputable def effectiveIso812_UV : EffectiveIso UComputablePresentation
    VComputablePresentation :=
  effectiveIso812d UComputablePresentation VComputablePresentation U_isComputableDiff
    V.isComputableDiff splitX812e isComputableSplit.?812e? splitX812f
    isComputableSplit.?812f?
    U.isPositive U.diffClosed U.noMinimal hxSplit812e V.isPositive V.diffClosed V.
```

```
    noMinimal
    hySplit812f U_master_nonempty V.master_nonempty U_isComputableUnion V.
    isComputableUnion UX_zero
    VX_zero

end DomainTheory.NeighbourhoodSystems
```

FixOp.lean

```
module

public import DomainTheory.NeighbourhoodSystems.FixedPointsAndRecursion.Theorem_4_2

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    FixedNbhdFinitaryOrder
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Examples_8_4

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap Sub8_6

namespace Exercise823

variable {α : Type} {E : NeighborhoodSystem α}

theorem eq_bot_of_fixed_constMap_bot {y : E.Element}
    (hy : (constMap E E.bot).toElementMap y = y) : y = E.bot := by
  rw [toElementMap_constMap] at hy
  exact hy.symm

instance uniqueFixedConstMapBot :
    Unique {y : E.Element // (constMap E E.bot).toElementMap y = y} where
  default := ⟨E.bot, toElementMap_constMap E.bot E.bot⟩
  uniq := fun ⟨_y, hy⟩ => Subtype.ext (eq_bot_of_fixed_constMap_bot hy)

def finitaryWitnessEquivBot (E : NeighborhoodSystem α) :
    {y : E.Element // (constMap E E.bot).toElementMap y = y} ≃o unitSys.Element where
  toFun _ := default
  invFun _ := default
  left_inv a := (Unique.eq_default a).symm
  right_inv b := (Unique.eq_default b).symm
  map_rel_iff' := by
    intro a b
    have hab : a = b := (Unique.eq_default a).trans (Unique.eq_default b).symm
    exact iff_of_true (le_refl default) (le_of_eq hab)

def fixOp (t : ApproximableMap (funSpace E E) (funSpace E E)) : ApproximableMap E E :=
  toApproxMap t.fixElement

def tOp (t : ApproximableMap (funSpace E E) (funSpace E E)) (a : ApproximableMap E E)
```

```
    :
    ApproximableMap E E :=
  toApproxMap (t.toElementMap (toFilter a))

abbrev Fix (a : ApproximableMap E E) := {y : E.Element // a.toElementMap y = y}

theorem constMap_bot_le_idMap (E : NeighborhoodSystem α) :
    constMap E E.bot ≤ idMap E := by
  rintro X Z hr
  rw [constMap_rel, mem_bot] at hr
  obtain ⟨hX, rfl⟩ := hr
  exact ⟨hX, E.master_mem, E.sub_master hX⟩

theorem isRetraction_constMap_bot (E : NeighborhoodSystem α) :
    Retraction (constMap E E.bot) := by
  constructor
  show (constMap E E.bot).comp (constMap E E.bot) = constMap E E.bot
  apply ApproximableMap.ext
  intro X Z
  simp only [comp_rel, constMap_rel, mem_bot]
  constructor
  · rintro ⟨Y, ⟨hX, rfl⟩, -, hZ⟩
    exact ⟨hX, hZ⟩
  · rintro ⟨hX, hZ⟩
    exact ⟨E.master, ⟨hX, rfl⟩, E.master_mem, hZ⟩

theorem isProjection_constMap_bot (E : NeighborhoodSystem α) :
    IsProjection (constMap E E.bot) :=
  ⟨isRetraction_constMap_bot E, constMap_bot_le_idMap E⟩

theorem isFinitaryProjection_constMap_bot (E : NeighborhoodSystem α) :
    FinitaryProjection (constMap E E.bot) :=
  ⟨⟨isProjection_constMap_bot E, Unit, unitSys, ⟨finitaryWitnessEquivBot E⟩⟩⟩

theorem iterElem_succ' (t : ApproximableMap (funSpace E E) (funSpace E E)) (n : ℕ) :
    t.iterElem (n + 1) = t.toElementMap (t.iterElem n) := by
  show (t.comp (t.iterMap n)).toElementMap (funSpace E E).bot = t.toElementMap (t.
    iterElem n)
  rw [toElementMap_comp]
  rfl

theorem iterElem_zero' (t : ApproximableMap (funSpace E E) (funSpace E E)) :
    t.iterElem 0 = (funSpace E E).bot := by
  show (idMap (funSpace E E)).toElementMap (funSpace E E).bot = (funSpace E E).bot
  rw [toElementMap_idMap]

theorem rel_master_of_mem (f : ApproximableMap E E) {X : Set α} (hX : E.mem X) :
    f.rel X E.master :=
  f.mono f.master_rel (E.sub_master hX) subset_rfl hX E.master_mem

theorem tOp_fixOp (t : ApproximableMap (funSpace E E) (funSpace E E)) :
    tOp t (fixOp t) = fixOp t := by
  show toApproxMap (t.toElementMap (toFilter (toApproxMap t.fixElement))) =
    toApproxMap t.fixElement
  rw [toFilter_toApproxMap, toElementMap_fixElement]
```

```
theorem tOp_toApproxMap (t : ApproximableMap (funSpace E E) (funSpace E E))
    (φ : (funSpace E E).Element) : tOp t (toApproxMap φ) = toApproxMap (t.toElementMap
    φ) := by
  unfold tOp
  rw [toFilter_toApproxMap]

theorem toApproxMap_bot_eq_constMap (E : NeighborhoodSystem α) :
    toApproxMap (funSpace E E).bot = constMap E E.bot := by
  apply ApproximableMap.ext
  intro X Y
  simp only [toApproxMap_rel, mem_bot, constMap_rel]
  constructor
  · intro h
    have hcb : constMap E E.bot ∈ step X Y := by rw [h]; trivial
    rwa [mem_step, constMap_rel, mem_bot] at hcb
  · rintro ⟨hX, rfl⟩
    exact Set.eq_univ_of_forall fun f => rel_master_of_mem f hX

theorem isFinitaryProjection_fixOp (t : ApproximableMap (funSpace E E) (funSpace E E))
    (ht : ∀ a, FinitaryProjection a → FinitaryProjection (tOp t a)) :
    FinitaryProjection (fixOp t) := by
  have hchain : ∀ n, FinitaryProjection (toApproxMap (t.iterElem n)) := by
    intro n
    induction n with
    | zero =>
      rw [iterElem_zero', toApproxMap_bot_eq_constMap]
      exact isFinitaryProjection_constMap_bot E
    | succ k ih =>
      rw [iterElem_succ', ← tOp_toApproxMap t (t.iterElem k)]
      exact ht _ ih
  have hsub : ∀ n, subFilter (t.iterElem n) = t.iterElem n := by
    intro n
    apply toApproxMap_injective
    rw [toApproxMap_subFilter]
    exact sub_eq_self_of_isFinitaryProjection (hchain n)
  have hdir : ∀ i j : ℕ, ∃ k, t.iterElem i ≤ t.iterElem k ∧ t.iterElem j ≤ t.iterElem
    k :=
    fun i j => ⟨max i j, iterElem_mono t (le_max_left i j), iterElem_mono t (
    le_max_right i j)⟩
  have hdirSub : ∀ i j : ℕ, ∃ k, subFilter (t.iterElem i) ≤ subFilter (t.iterElem k) ∧
      subFilter (t.iterElem j) ≤ subFilter (t.iterElem k) := by
    intro i j
    obtain ⟨k, hik, hjk⟩ := hdir i j
    refine ⟨k, ?_, ?_⟩
    · rw [hsub i, hsub k]; exact hik
    · rw [hsub j, hsub k]; exact hjk
  have hEq : t.fixElement = iSupDirected t.iterElem hdir := by
    apply NeighborhoodSystem.Element.ext
    intro Z
    rw [mem_fixElement, mem_iSupDirected]
    simp_rw [mem_iterElem]
  have hkey : subFilter t.fixElement = t.fixElement := by
    rw [hEq, subFilter_iSupDirected t.iterElem hdir hdirSub]
    apply NeighborhoodSystem.Element.ext
    intro Z
    rw [mem_iSupDirected, mem_iSupDirected]
```

```
    simp_rw [hsub]
  show FinitaryProjection (toApproxMap t.fixElement)
  apply isFinitaryProjection_of_sub_eq_self
  rw [← toApproxMap_subFilter, hkey]

theorem fixedDomain_fixOp_iso_T (t : ApproximableMap (funSpace E E) (funSpace E E))
    (ht : ∀ a, FinitaryProjection a → FinitaryProjection (tOp t a))
    (T : ApproximableMap E E → Σ β : Type, NeighborhoodSystem β)
    (hT : ∀ a, FinitaryProjection a → Nonempty (Fix (tOp t a) ≃o (T a).2.Element)) :
    Nonempty (Fix (fixOp t) ≃o (T (fixOp t)).2.Element) := by
  have h := hT (fixOp t) (isFinitaryProjection_fixOp t ht)
  rwa [tOp_fixOp] at h

theorem fixedNbhd_fixOp_subsystem (t : ApproximableMap (funSpace E E) (funSpace E E))
    (ht : ∀ a, FinitaryProjection a → FinitaryProjection (tOp t a))
    {a : ApproximableMap E E} (ha : FinitaryProjection a) (hpre : tOp t a ≤ a) :
    fixedNbhd (fixOp t) ? fixedNbhd a := by
  have hpre' : toApproxMap (t.toElementMap (toFilter a)) ≤ toApproxMap (toFilter a) :=
    by
    show tOp t a ≤ toApproxMap (toFilter a)
    rw [toApproxMap_toFilter]
    exact hpre
  have h1 : t.toElementMap (toFilter a) ≤ toFilter a := by
    have hiff := (funSpaceEquiv E E).le_iff_le
      (x := t.toElementMap (toFilter a)) (y := toFilter a)
    rw [funSpaceEquiv_apply, funSpaceEquiv_apply] at hiff
    exact hiff.mp hpre'
  have h2 : t.fixElement ≤ toFilter a := fixElement_le_of_toElementMap_le t h1
  have hle : fixOp t ≤ a := by
    show toApproxMap t.fixElement ≤ a
    rw [← toApproxMap_toFilter a]
    exact toApproxMap_monotone h2
  exact (isFinitaryProjection_le_iff_fixedNbhd_subsystem
    (isFinitaryProjection_fixOp t ht) ha).mp hle

end Exercise823

end DomainTheory.NeighbourhoodSystems
```

CoupledFixedPoints.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.FixOp

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_8

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_3
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
```

```
open NeighborhoodSystem ApproximableMap Sub8_6 Exercise823

namespace Exercise824

variable {α : Type} {E : NeighborhoodSystem α}

abbrev PairSpace : NeighborhoodSystem (ApproximableMap E E ? ApproximableMap E E) :=
  prod (funSpace E E) (funSpace E E)

def aOp (s t : ApproximableMap (PairSpace (E := E)) (funSpace E E)) (n : ℕ) :
    ApproximableMap E E :=
  toApproxMap ((paired s t).iterElem n).fst

def aStar (s t : ApproximableMap (PairSpace (E := E)) (funSpace E E)) :
    ApproximableMap E E :=
  toApproxMap (paired s t).fixElement.fst

def bOp (s t : ApproximableMap (PairSpace (E := E)) (funSpace E E)) (n : ℕ) :
    ApproximableMap E E :=
  toApproxMap ((paired s t).iterElem n).snd

def bStar (s t : ApproximableMap (PairSpace (E := E)) (funSpace E E)) :
    ApproximableMap E E :=
  toApproxMap (paired s t).fixElement.snd

def binOp (f : ApproximableMap (PairSpace (E := E)) (funSpace E E))
    (a b : ApproximableMap E E) : ApproximableMap E E :=
  toApproxMap (f.toElementMap (pair (toFilter a) (toFilter b)))

theorem fst_mono {z z' : (PairSpace (E := E)).Element} (h : z ≤ z') : z.fst ≤ z'.fst
    := by
  intro X hX
  rw [mem_fst] at hX ⊢
  exact ⟨hX.1, h _ hX.2⟩

theorem iterElem_pair_eq_pair (s t : ApproximableMap (PairSpace (E := E)) (funSpace E
    E)) (n : ℕ) :
    (paired s t).iterElem n = pair (toFilter (aOp s t n)) (toFilter (bOp s t n)) := by
  show (paired s t).iterElem n
      = pair (toFilter (toApproxMap ((paired s t).iterElem n).fst))
          (toFilter (toApproxMap ((paired s t).iterElem n).snd))
  rw [toFilter_toApproxMap, toFilter_toApproxMap, pair_fst_snd]

theorem iterElem_succ_pair (s t : ApproximableMap (PairSpace (E := E)) (funSpace E E))
     (n : ℕ) :
    (paired s t).iterElem (n + 1) = (paired s t).toElementMap ((paired s t).iterElem n
    ) := by
  show ((paired s t).comp ((paired s t).iterMap n)).toElementMap (PairSpace (E := E)).
    bot
      = (paired s t).toElementMap (((paired s t).iterMap n).toElementMap (PairSpace (E
     := E)).bot)
  rw [toElementMap_comp]

theorem aOp_succ (s t : ApproximableMap (PairSpace (E := E)) (funSpace E E)) (n : ℕ) :
    aOp s t (n + 1) = binOp s (aOp s t n) (bOp s t n) := by
```

```
  show toApproxMap ((paired s t).iterElem (n + 1)).fst
      = toApproxMap (s.toElementMap (pair (toFilter (aOp s t n)) (toFilter (bOp s t n)
    )))
  rw [iterElem_succ_pair, toElementMap_paired, fst_pair, iterElem_pair_eq_pair]

theorem bOp_succ (s t : ApproximableMap (PairSpace (E := E)) (funSpace E E)) (n : ℕ) :
    bOp s t (n + 1) = binOp t (aOp s t n) (bOp s t n) := by
  show toApproxMap ((paired s t).iterElem (n + 1)).snd
      = toApproxMap (t.toElementMap (pair (toFilter (aOp s t n)) (toFilter (bOp s t n)
    )))
  rw [iterElem_succ_pair, toElementMap_paired, snd_pair, iterElem_pair_eq_pair]

theorem iterElem_zero_pair (s t : ApproximableMap (PairSpace (E := E)) (funSpace E E))
     :
    (paired s t).iterElem 0 = (PairSpace (E := E)).bot := by
  show (idMap (PairSpace (E := E))).toElementMap (PairSpace (E := E)).bot
      = (PairSpace (E := E)).bot
  rw [toElementMap_idMap]

theorem pair_bot_bot : pair ((funSpace E E).bot) ((funSpace E E).bot) = (PairSpace (E
    := E)).bot := by
  apply Element.ext
  intro W
  rw [mem_pair, mem_bot]
  constructor
  · rintro ⟨X, Y, hX, hY, rfl⟩
    rw [mem_bot] at hX hY
    rw [hX, hY, prod_master]
  · intro hW
    refine ⟨(funSpace E E).master, (funSpace E E).master, ?_, ?_, ?_⟩
    · rw [mem_bot]
    · rw [mem_bot]
    · rw [hW, prod_master]

theorem pairSpace_bot_fst : ((PairSpace (E := E)).bot).fst = (funSpace E E).bot := by
  rw [← pair_bot_bot, fst_pair]

theorem aOp_zero (s t : ApproximableMap (PairSpace (E := E)) (funSpace E E)) :
    aOp s t 0 = constMap E E.bot := by
  show toApproxMap ((paired s t).iterElem 0).fst = constMap E E.bot
  rw [iterElem_zero_pair, pairSpace_bot_fst, Exercise823.toApproxMap_bot_eq_constMap]

theorem pairSpace_bot_snd : ((PairSpace (E := E)).bot).snd = (funSpace E E).bot := by
  rw [← pair_bot_bot, snd_pair]

theorem bOp_zero (s t : ApproximableMap (PairSpace (E := E)) (funSpace E E)) :
    bOp s t 0 = constMap E E.bot := by
  show toApproxMap ((paired s t).iterElem 0).snd = constMap E E.bot
  rw [iterElem_zero_pair, pairSpace_bot_snd, Exercise823.toApproxMap_bot_eq_constMap]

theorem isFinitaryProjection_chain (s t : ApproximableMap (PairSpace (E := E)) (
    funSpace E E))
    (hst : ∀ a b, FinitaryProjection a → FinitaryProjection b →
      FinitaryProjection (binOp s a b) ∧ FinitaryProjection (binOp t a b)) :
    ∀ n, FinitaryProjection (aOp s t n) ∧ FinitaryProjection (bOp s t n) := by
  intro n
```

```
  induction n with
  | zero =>
    rw [aOp_zero, bOp_zero]
    exact ⟨Exercise823.isFinitaryProjection_constMap_bot E,
      Exercise823.isFinitaryProjection_constMap_bot E⟩
  | succ k ih =>
    rw [aOp_succ, bOp_succ]
    exact hst _ _ ih.1 ih.2

theorem snd_mono {z z' : (PairSpace (E := E)).Element} (h : z ≤ z') : z.snd ≤ z'.snd
    := by
  intro X hX
  rw [mem_snd] at hX ⊢
  exact ⟨hX.1, h _ hX.2⟩

theorem isFinitaryProjection_aStar_bStar (s t : ApproximableMap (PairSpace (E := E)) (
    funSpace E E))
    (hst : ∀ a b, FinitaryProjection a → FinitaryProjection b →
      FinitaryProjection (binOp s a b) ∧ FinitaryProjection (binOp t a b)) :
    FinitaryProjection (aStar s t) ∧ FinitaryProjection (bStar s t) := by
  have hchain := isFinitaryProjection_chain s t hst
  have hsubA : ∀ n, subFilter (((paired s t).iterElem n).fst) = ((paired s t).iterElem
    n).fst := by
    intro n
    apply toApproxMap_injective
    rw [toApproxMap_subFilter]
    show sub (aOp s t n) = aOp s t n
    exact sub_eq_self_of_isFinitaryProjection (hchain n).1
  have hsubB : ∀ n, subFilter (((paired s t).iterElem n).snd) = ((paired s t).iterElem
    n).snd := by
    intro n
    apply toApproxMap_injective
    rw [toApproxMap_subFilter]
    show sub (bOp s t n) = bOp s t n
    exact sub_eq_self_of_isFinitaryProjection (hchain n).2
  have hdirA : ∀ i j : ℕ, ∃ k, ((paired s t).iterElem i).fst ≤ ((paired s t).iterElem
    k).fst ∧
      ((paired s t).iterElem j).fst ≤ ((paired s t).iterElem k).fst :=
    fun i j => ⟨max i j, fst_mono (iterElem_mono (paired s t) (le_max_left i j)),
      fst_mono (iterElem_mono (paired s t) (le_max_right i j))⟩
  have hdirB : ∀ i j : ℕ, ∃ k, ((paired s t).iterElem i).snd ≤ ((paired s t).iterElem
    k).snd ∧
      ((paired s t).iterElem j).snd ≤ ((paired s t).iterElem k).snd :=
    fun i j => ⟨max i j, snd_mono (iterElem_mono (paired s t) (le_max_left i j)),
      snd_mono (iterElem_mono (paired s t) (le_max_right i j))⟩
  have hdirSubA : ∀ i j : ℕ, ∃ k, subFilter (((paired s t).iterElem i).fst) ≤
      subFilter (((paired s t).iterElem k).fst) ∧
      subFilter (((paired s t).iterElem j).fst) ≤ subFilter (((paired s t).iterElem k)
    .fst) := by
    intro i j
    obtain ⟨k, hik, hjk⟩ := hdirA i j
    exact ⟨k, by rw [hsubA i, hsubA k]; exact hik, by rw [hsubA j, hsubA k]; exact hjk⟩
  have hdirSubB : ∀ i j : ℕ, ∃ k, subFilter (((paired s t).iterElem i).snd) ≤
      subFilter (((paired s t).iterElem k).snd) ∧
      subFilter (((paired s t).iterElem j).snd) ≤ subFilter (((paired s t).iterElem k)
    .snd) := by
```

```
    intro i j
    obtain ⟨k, hik, hjk⟩ := hdirB i j
    exact ⟨k, by rw [hsubB i, hsubB k]; exact hik, by rw [hsubB j, hsubB k]; exact hjk⟩
  have hEqA : (paired s t).fixElement.fst =
      iSupDirected (fun n => ((paired s t).iterElem n).fst) hdirA := by
    apply Element.ext
    intro X
    rw [mem_fst, mem_fixElement, mem_iSupDirected]
    constructor
    · rintro ⟨hX, n, hn⟩
      exact ⟨n, mem_fst.mpr ⟨hX, (mem_iterElem (paired s t) n).mpr hn⟩⟩
    · rintro ⟨n, hn⟩
      rw [mem_fst] at hn
      exact ⟨hn.1, n, (mem_iterElem (paired s t) n).mp hn.2⟩
  have hEqB : (paired s t).fixElement.snd =
      iSupDirected (fun n => ((paired s t).iterElem n).snd) hdirB := by
    apply Element.ext
    intro X
    rw [mem_snd, mem_fixElement, mem_iSupDirected]
    constructor
    · rintro ⟨hX, n, hn⟩
      exact ⟨n, mem_snd.mpr ⟨hX, (mem_iterElem (paired s t) n).mpr hn⟩⟩
    · rintro ⟨n, hn⟩
      rw [mem_snd] at hn
      exact ⟨hn.1, n, (mem_iterElem (paired s t) n).mp hn.2⟩
  have hkeyA : subFilter ((paired s t).fixElement.fst) = (paired s t).fixElement.fst
    := by
    rw [hEqA, subFilter_iSupDirected _ hdirA hdirSubA]
    apply Element.ext
    intro Z
    rw [mem_iSupDirected, mem_iSupDirected]
    simp_rw [hsubA]
  have hkeyB : subFilter ((paired s t).fixElement.snd) = (paired s t).fixElement.snd
    := by
    rw [hEqB, subFilter_iSupDirected _ hdirB hdirSubB]
    apply Element.ext
    intro Z
    rw [mem_iSupDirected, mem_iSupDirected]
    simp_rw [hsubB]
  refine ⟨?_, ?_⟩
  · show FinitaryProjection (toApproxMap (paired s t).fixElement.fst)
    apply isFinitaryProjection_of_sub_eq_self
    rw [← toApproxMap_subFilter, hkeyA]
  · show FinitaryProjection (toApproxMap (paired s t).fixElement.snd)
    apply isFinitaryProjection_of_sub_eq_self
    rw [← toApproxMap_subFilter, hkeyB]

theorem fixedNbhd_aStar_bStar_subsystem (s t : ApproximableMap (PairSpace (E := E)) (
    funSpace E E))
    (hst : ∀ a b, FinitaryProjection a → FinitaryProjection b →
      FinitaryProjection (binOp s a b) ∧ FinitaryProjection (binOp t a b))
    {a b : ApproximableMap E E} (ha : FinitaryProjection a) (hb : FinitaryProjection b
    )
    (hpreA : binOp s a b ≤ a) (hpreB : binOp t a b ≤ b) :
    fixedNbhd (aStar s t) ? fixedNbhd a ∧ fixedNbhd (bStar s t) ? fixedNbhd b := by
  have h1 : s.toElementMap (pair (toFilter a) (toFilter b)) ≤ toFilter a := by
```

```
    have hpreA' : toApproxMap (s.toElementMap (pair (toFilter a) (toFilter b))) ≤
        toApproxMap (toFilter a) := by
      show binOp s a b ≤ toApproxMap (toFilter a)
      rw [toApproxMap_toFilter]
      exact hpreA
    have hiff := (funSpaceEquiv E E).le_iff_le
      (x := s.toElementMap (pair (toFilter a) (toFilter b))) (y := toFilter a)
    rw [funSpaceEquiv_apply, funSpaceEquiv_apply] at hiff
    exact hiff.mp hpreA'
  have h2 : t.toElementMap (pair (toFilter a) (toFilter b)) ≤ toFilter b := by
    have hpreB' : toApproxMap (t.toElementMap (pair (toFilter a) (toFilter b))) ≤
        toApproxMap (toFilter b) := by
      show binOp t a b ≤ toApproxMap (toFilter b)
      rw [toApproxMap_toFilter]
      exact hpreB
    have hiff := (funSpaceEquiv E E).le_iff_le
      (x := t.toElementMap (pair (toFilter a) (toFilter b))) (y := toFilter b)
    rw [funSpaceEquiv_apply, funSpaceEquiv_apply] at hiff
    exact hiff.mp hpreB'
  have hle : (paired s t).toElementMap (pair (toFilter a) (toFilter b)) ≤
      pair (toFilter a) (toFilter b) := by
    rw [toElementMap_paired]
    exact pair_le_pair_iff.mpr ⟨h1, h2⟩
  have hfix : (paired s t).fixElement ≤ pair (toFilter a) (toFilter b) :=
    fixElement_le_of_toElementMap_le (paired s t) hle
  have hfstle : (paired s t).fixElement.fst ≤ toFilter a := by
    have := fst_mono hfix; rwa [fst_pair] at this
  have hsndle : (paired s t).fixElement.snd ≤ toFilter b := by
    have := snd_mono hfix; rwa [snd_pair] at this
  have hAle : aStar s t ≤ a := by
    show toApproxMap (paired s t).fixElement.fst ≤ a
    rw [← toApproxMap_toFilter a]
    exact toApproxMap_monotone hfstle
  have hBle : bStar s t ≤ b := by
    show toApproxMap (paired s t).fixElement.snd ≤ b
    rw [← toApproxMap_toFilter b]
    exact toApproxMap_monotone hsndle
  obtain ⟨hFinA, hFinB⟩ := isFinitaryProjection_aStar_bStar s t hst
  exact ⟨(isFinitaryProjection_le_iff_fixedNbhd_subsystem hFinA ha).mp hAle,
    (isFinitaryProjection_le_iff_fixedNbhd_subsystem hFinB hb).mp hBle⟩

theorem toElementMap_fixElement_fst (s t : ApproximableMap (PairSpace (E := E)) (
    funSpace E E)) :
    s.toElementMap (paired s t).fixElement = (paired s t).fixElement.fst := by
  have h : (paired s t).toElementMap (paired s t).fixElement = (paired s t).fixElement
     :=
    toElementMap_fixElement (paired s t)
  rw [toElementMap_paired] at h
  have h' := congrArg NeighborhoodSystem.Element.fst h
  rwa [fst_pair] at h'

theorem binOp_aStar_bStar_left (s t : ApproximableMap (PairSpace (E := E)) (funSpace E
     E)) :
    binOp s (aStar s t) (bStar s t) = aStar s t := by
  unfold binOp aStar bStar
  rw [toFilter_toApproxMap, toFilter_toApproxMap, pair_fst_snd,
```

```
    toElementMap_fixElement_fst]

theorem toElementMap_fixElement_snd (s t : ApproximableMap (PairSpace (E := E)) (
    funSpace E E)) :
    t.toElementMap (paired s t).fixElement = (paired s t).fixElement.snd := by
  have h : (paired s t).toElementMap (paired s t).fixElement = (paired s t).fixElement
     :=
    toElementMap_fixElement (paired s t)
  rw [toElementMap_paired] at h
  have h' := congrArg NeighborhoodSystem.Element.snd h
  rwa [snd_pair] at h'

theorem binOp_aStar_bStar_right (s t : ApproximableMap (PairSpace (E := E)) (funSpace
    E E)) :
    binOp t (aStar s t) (bStar s t) = bStar s t := by
  unfold binOp aStar bStar
  rw [toFilter_toApproxMap, toFilter_toApproxMap, pair_fst_snd,
    toElementMap_fixElement_snd]

theorem fixedDomain_aStar_bStar_iso (s t : ApproximableMap (PairSpace (E := E)) (
    funSpace E E))
    (hst : ∀ a b, FinitaryProjection a → FinitaryProjection b →
      FinitaryProjection (binOp s a b) ∧ FinitaryProjection (binOp t a b))
    (S T : ApproximableMap E E → ApproximableMap E E → Σ β : Type, NeighborhoodSystem
     β)
    (hS : ∀ a b, FinitaryProjection a → FinitaryProjection b →
      Nonempty (Fix (binOp s a b) ≃o (S a b).2.Element))
    (hT : ∀ a b, FinitaryProjection a → FinitaryProjection b →
      Nonempty (Fix (binOp t a b) ≃o (T a b).2.Element)) :
    Nonempty (Fix (aStar s t) ≃o (S (aStar s t) (bStar s t)).2.Element) ∧
      Nonempty (Fix (bStar s t) ≃o (T (aStar s t) (bStar s t)).2.Element) := by
  obtain ⟨hFinA, hFinB⟩ := isFinitaryProjection_aStar_bStar s t hst
  have h1 := hS (aStar s t) (bStar s t) hFinA hFinB
  have h2 := hT (aStar s t) (bStar s t) hFinA hFinB
  rw [binOp_aStar_bStar_left] at h1
  rw [binOp_aStar_bStar_right] at h2
  exact ⟨h1, h2⟩

end Exercise824

end DomainTheory.NeighbourhoodSystems

namespace DomainTheory.NeighbourhoodSystems.Example15

end DomainTheory.NeighbourhoodSystems.Example15
namespace DomainTheory.NeighbourhoodSystems.Exercise722

instance Ssys_countable : Countable {S : Set (List Bool) // Ssys.mem S} := by
  classical
  let f (e : SExpr) : {S : Set (List Bool) // InS S} :=
    if h : (denote e).Nonempty then ⟨denote e, InS_denote_of_nonempty h⟩
    else ⟨Set.univ, InS.univ⟩
  have : Countable {S : Set (List Bool) // InS S} :=
    Function.Surjective.countable (f := f) fun ⟨X, hX⟩ => by
      obtain ⟨e, he⟩ := InS_exists_denote hX
      refine ⟨e, ?_⟩
```

```
      have hne : (denote e).Nonempty := he.symm ▸ hX.nonempty
      dsimp [f]
      rw [dite_eq_left hne]
      exact Subtype.ext he
  exact Countable.of_equiv ({S : Set (List Bool) // InS S})
    (Equiv.subtypeEquivRight fun _ => Ssys_mem.symm)

end DomainTheory.NeighbourhoodSystems.Exercise722
namespace DomainTheory.NeighbourhoodSystems.Example15

theorem P4_embeds : neighborhoodSystem ? U :=
  theorem_8_8 neighborhoodSystem

end DomainTheory.NeighbourhoodSystems.Example15
namespace DomainTheory.NeighbourhoodSystems.Exercise722

theorem Ssys_embeds : Ssys ? U :=
  theorem_8_8 Ssys

end DomainTheory.NeighbourhoodSystems.Exercise722
```

ReflexiveDomain.lean

```
module

public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Definition_7_1

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.U
public import DomainTheory.NeighbourhoodSystems.DomainEquations.Exercise_6_29

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    EmbedIntoPow
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    ExampleC_le_B
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Proposition_7_12

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.ASharp
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    ASharp_more
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.FixOp
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    CoupledFixedPoints
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    EmbeddingsIntoU
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    SumProdRetracts
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Proposition_8_10
public import DomainTheory.NeighbourhoodSystems.ComputabilityInEffectivelyGivenDomains
    .Exercise_7_15
public import DomainTheory.NeighbourhoodSystems.TypedLambdaCalculus.Table_5_5
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6
```

```
@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
section
open NeighborhoodSystem ApproximableMap DomainTheory.NeighbourhoodSystems.Exercise511
variable {α : Type*} (V : NeighborhoodSystem α)

theorem trianglelefteq_iterSys : V ? iterSys V :=
  trianglelefteq_of_projectionPair (embedIntoPow V) (head V)
    (head_comp_embedIntoPow V) (embedIntoPow_comp_head_le V)
end

set_option linter.unusedVariables false

theorem example_825_embed.{u_1} : ∀ {α : Type u_1} (V : DomainTheory.
    NeighbourhoodSystems.NeighborhoodSystem α),
  @DomainTheory.NeighbourhoodSystems.Trianglelefteq α (Prod Nat α) V (@DomainTheory.
    NeighbourhoodSystems.iterSys α V) :=
  @DomainTheory.NeighbourhoodSystems.trianglelefteq_iterSys

section
open NeighborhoodSystem
variable {α : Type*}

def arrowReindexOrderIso {ι ι' : Type*} (e : ι ≃ ι') (E : Type*) [Preorder E] :
    (ι → E) ≃o (ι' → E) where
  toFun f i' := f (e.symm i')
  invFun g i := g (e i)
  left_inv f := by funext i; simp
  right_inv g := by funext i'; simp
  map_rel_iff' := by
    intro f g
    constructor
    · intro h i
      simpa using h (e i)
    · intro h i'
      simpa using h (e.symm i')

def sumArrowOrderIso (α β : Type*) (E : Type*) [Preorder E] :
    (α ? β → E) ≃o (α → E) × (β → E) where
  toFun f := (fun a => f (Sum.inl a), fun b => f (Sum.inr b))
  invFun p := Sum.elim p.1 p.2
  left_inv f := by funext i; cases i <;> rfl
  right_inv p := rfl
  map_rel_iff' := by
    intro f g
    constructor
    · rintro ⟨h1, h2⟩ i
      cases i with
      | inl a => exact h1 a
      | inr b => exact h2 b
    · intro h
      exact ⟨fun a => h (Sum.inl a), fun b => h (Sum.inr b)⟩

def interleaveOrderIso (E : Type*) [Preorder E] : (ℕ → E) × (ℕ → E) ≃o (ℕ → E) :=
```

```
  (sumArrowOrderIso ℕ ℕ E).symm.trans (arrowReindexOrderIso Equiv.natSumNatEquivNat E)

def powProdOrderIso (V : NeighborhoodSystem α) :
    (prod (iterSys V) (iterSys V)).Element ≃o (iterSys V).Element :=
  (prodEquiv (iterSys V) (iterSys V)).trans <|
    (prodCongrOrderIso (iterSeqEquiv V) (iterSeqEquiv V)).trans <|
      (interleaveOrderIso V.Element).trans (iterSeqEquiv V).symm

theorem pow_prod_isomorphic (V : NeighborhoodSystem α) :
    prod (iterSys V) (iterSys V) ≅? iterSys V :=
  ⟨powProdOrderIso V⟩

end

set_option linter.unusedVariables false

theorem example_825_pow.{u_1} : ∀ {α : Type u_1} (V : DomainTheory.
    NeighbourhoodSystems.NeighborhoodSystem α),
  @DomainTheory.NeighbourhoodSystems.Isomorphic (Sum (Prod Nat α) (Prod Nat α)) (Prod
    Nat α)
    (@DomainTheory.NeighbourhoodSystems.prod (Prod Nat α) (Prod Nat α) (@DomainTheory.
    NeighbourhoodSystems.iterSys α V)
      (@DomainTheory.NeighbourhoodSystems.iterSys α V))
    (@DomainTheory.NeighbourhoodSystems.iterSys α V) :=
  @DomainTheory.NeighbourhoodSystems.pow_prod_isomorphic

section
open NeighborhoodSystem ApproximableMap
variable {α β : Type*}

def isoOfUnique (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    [Unique V₀.Element] [Unique V₁.Element] : V₀.Element ≃o V₁.Element where
  toFun _ := default
  invFun _ := default
  left_inv x := (Unique.eq_default x).symm
  right_inv y := (Unique.eq_default y).symm
  map_rel_iff' := by
    intro a b
    exact iff_of_true (le_refl _) (le_of_eq (Subsingleton.elim a b))

instance uniqueApproximableMapUnitSys : Unique (ApproximableMap unitSys unitSys) where
  default := idMap unitSys
  uniq _f := ApproximableMap.ext_of_toElementMap fun _x => Subsingleton.elim _ _

instance uniqueFunSpaceUnitSys : Unique (funSpace unitSys unitSys).Element where
  default := (funSpaceEquiv unitSys unitSys).symm default
  uniq _x := (funSpaceEquiv unitSys unitSys).injective (Subsingleton.elim _ _)

theorem isomorphic_of_unique (V₀ : NeighborhoodSystem α) (V₁ : NeighborhoodSystem β)
    [Unique V₀.Element] [Unique V₁.Element] : V₀ ≅? V₁ :=
  ⟨isoOfUnique V₀ V₁⟩

theorem funSpace_unitSys_isomorphic : funSpace unitSys unitSys ≅? unitSys :=
  isomorphic_of_unique _ _

end
```

```
set_option linter.unusedVariables false

theorem example_825_unit : @DomainTheory.NeighbourhoodSystems.Isomorphic
  (@DomainTheory.NeighbourhoodSystems.ApproximableMap Unit Unit DomainTheory.
    NeighbourhoodSystems.unitSys
    DomainTheory.NeighbourhoodSystems.unitSys)
  Unit
  (@DomainTheory.NeighbourhoodSystems.funSpace Unit Unit DomainTheory.
    NeighbourhoodSystems.unitSys
    DomainTheory.NeighbourhoodSystems.unitSys)
  DomainTheory.NeighbourhoodSystems.unitSys :=
  DomainTheory.NeighbourhoodSystems.funSpace_unitSys_isomorphic

open NeighborhoodSystem ApproximableMap

abbrev RDom := prod (funSpace U U) (prod (funSpace U U) U)

noncomputable def RMap (c : ApproximableMap U U) : ApproximableMap RDom U :=
  c.comp ((evalMap U U).comp
    (paired
      ((proj₀ (funSpace U U) U).comp (proj₁ (funSpace U U) (prod (funSpace U U) U)))
      ((evalMap U U).comp
        (paired (proj₀ (funSpace U U) (prod (funSpace U U) U))
          ((proj₁ (funSpace U U) U).comp (proj₁ (funSpace U U) (prod (funSpace U U) U))
    )))))

noncomputable def curryOnceC (c : ApproximableMap U U) :
    ApproximableMap (funSpace U U) (funSpace (prod (funSpace U U) U) U) :=
  curry (RMap c)

noncomputable def fixedNbhd_elementIso_fix {a : ApproximableMap U U} (ha :
    FinitaryProjection a) :
    (fixedNbhd a).Element ≃o {y : U.Element // a.toElementMap y = y} := by
  have h := Subsystem.elementIso (fixedNbhd_subsystem a)
  unfold Subsystem.retractionOfSubsystem at h
  rwa [inj_comp_proj_eq_self ha] at h

noncomputable def lamOp (c : ApproximableMap U U) :
    ApproximableMap (funSpace U U) (funSpace (funSpace U U) (funSpace U U)) :=
  (curryC (funSpace U U) U U).comp (curryOnceC c)

noncomputable def presentationIterU : ComputablePresentation (iterSys U) :=
  Classical.choice (iterSys_isEffectivelyGiven U_isEffectivelyGiven)

noncomputable def cInj : ApproximableMap (iterSys U) U :=
  (theorem_8_8_b_strong presentationIterU).choose

noncomputable def cProj : ApproximableMap U (iterSys U) :=
  (theorem_8_8_b_strong presentationIterU).choose_spec.choose

noncomputable def cCombinator : ApproximableMap U U := cInj.comp cProj

noncomputable def TArrow (a : ApproximableMap U U) : Σ β : Type, NeighborhoodSystem β
    :=
  ⟨_, funSpace (fixedNbhd a) (fixedNbhd cCombinator)⟩
```

```
theorem cProj_comp_cInj : cProj.comp cInj = idMap (iterSys U) :=
  (theorem_8_8_b_strong presentationIterU).choose_spec.choose_spec.1

noncomputable def cElementIso :
    (iterSys U).Element ≃o {y : U.Element // cCombinator.toElementMap y = y} :=
  elementIsoOfProjectionPair cInj cProj cProj_comp_cInj rfl

noncomputable def tOpMap (c : ApproximableMap U U) :
    ApproximableMap (funSpace U U) (funSpace U U) :=
  (expMap jArrow iArrow).comp (lamOp c)

theorem cInj_comp_cProj_le : cInj.comp cProj ≤ idMap U :=
  (theorem_8_8_b_strong presentationIterU).choose_spec.choose_spec.2.1

theorem isFinitary_cCombinator : IsFinitary cCombinator :=
  isFinitary_of_projectionPair cInj cProj cProj_comp_cInj rfl

theorem isRetraction_cCombinator : Retraction cCombinator := by
  constructor
  show (cInj.comp cProj).comp (cInj.comp cProj) = cInj.comp cProj
  rw [comp_assoc, ← comp_assoc cProj cInj cProj, cProj_comp_cInj, idMap_comp]

theorem isProjection_cCombinator : IsProjection cCombinator :=
  ⟨isRetraction_cCombinator, cInj_comp_cProj_le⟩

theorem isFinitaryProjection_cCombinator : FinitaryProjection cCombinator :=
  ⟨⟨isProjection_cCombinator, isFinitary_cCombinator⟩⟩

theorem fixedNbhd_cCombinator_isomorphic : fixedNbhd cCombinator ≅? iterSys U :=
  ⟨(fixedNbhd_elementIso_fix isFinitaryProjection_cCombinator).trans cElementIso.symm⟩

theorem hVV_cCombinator :
    prod (fixedNbhd cCombinator) (fixedNbhd cCombinator) ≅? fixedNbhd cCombinator :=
  ((fixedNbhd_cCombinator_isomorphic.prod fixedNbhd_cCombinator_isomorphic).trans
    (pow_prod_isomorphic U)).trans fixedNbhd_cCombinator_isomorphic.symm

theorem toElementMap_RMap (c : ApproximableMap U U) (ψ φ : (funSpace U U).Element) (x
    : U.Element) :
    (RMap c).toElementMap (pair ψ (pair φ x)) =
      c.toElementMap ((toApproxMap φ).toElementMap ((toApproxMap ψ).toElementMap x))
    := by
  simp only [RMap, toElementMap_comp, toElementMap_paired, toElementMap_proj₀,
    toElementMap_proj₁,
    fst_pair, snd_pair, evalMap_apply]

theorem toApproxMap_lamOp (c a : ApproximableMap U U) :
    toApproxMap ((lamOp c).toElementMap (toFilter a)) = expMap a c := by
  apply ApproximableMap.ext_of_toElementMap
  intro φ
  apply (funSpaceEquiv U U).injective
  rw [funSpaceEquiv_apply, funSpaceEquiv_apply]
  apply ApproximableMap.ext_of_toElementMap
  intro x
  show (toApproxMap ((toApproxMap ((lamOp c).toElementMap (toFilter a))).toElementMap
    φ)).toElementMap x
```

```
    = (toApproxMap ((expMap a c).toElementMap φ)).toElementMap x
  rw [lamOp, toElementMap_comp, curryC_toApproxMap, toElementMap_curry_apply,
    curryOnceC,
    toElementMap_curry_apply, toElementMap_RMap, Sub8_6.toApproxMap_toFilter,
    expMap.toApproxMap_toElementMap, toElementMap_comp, toElementMap_comp]

theorem tOp_tOpMap (c a : ApproximableMap U U) :
    Exercise823.tOp (tOpMap c) a = arrowComb a c := by
  show toApproxMap ((tOpMap c).toElementMap (toFilter a)) = arrowComb a c
  rw [tOpMap, toElementMap_comp, expMap.toApproxMap_toElementMap, toApproxMap_lamOp,
    expMap.eq_lamComb]
  rfl

theorem hT_TArrow (a : ApproximableMap U U) (ha : FinitaryProjection a) :
    Nonempty (Exercise823.Fix (Exercise823.tOp (tOpMap cCombinator) a) ≃o
      (TArrow a).2.Element) := by
  rw [tOp_tOpMap]
  exact ⟨(arrowComb.elementIso a cCombinator ha isFinitaryProjection_cCombinator).symm⟩

theorem ht_tOpMap (c : ApproximableMap U U) (hc : FinitaryProjection c) :
    ∀ a, FinitaryProjection a → FinitaryProjection (Exercise823.tOp (tOpMap c) a) :=
    by
  intro a ha
  rw [tOp_tOpMap]
  exact arrowComb.finitaryProjection a c ha hc

theorem Dsol_isomorphic_funSpace_cCombinator :
    fixedNbhd (Exercise823.fixOp (tOpMap cCombinator)) ≅?
      funSpace (fixedNbhd (Exercise823.fixOp (tOpMap cCombinator))) (fixedNbhd
    cCombinator) := by
  have hht := ht_tOpMap cCombinator isFinitaryProjection_cCombinator
  have hFP := Exercise823.isFinitaryProjection_fixOp (tOpMap cCombinator) hht
  have h1 : Nonempty ((fixedNbhd (Exercise823.fixOp (tOpMap cCombinator))).Element ≃o
      Exercise823.Fix (Exercise823.fixOp (tOpMap cCombinator))) :=
    ⟨fixedNbhd_elementIso_fix hFP⟩
  have h2 := Exercise823.fixedDomain_fixOp_iso_T (tOpMap cCombinator) hht TArrow
    hT_TArrow
  exact h1.elim fun e1 => h2.elim fun e2 => ⟨e1.trans e2⟩

theorem U_trianglelefteq_Dsol : U ? fixedNbhd (Exercise823.fixOp (tOpMap cCombinator))
     := by
  set D := fixedNbhd (Exercise823.fixOp (tOpMap cCombinator)) with hD
  have h1 : U ? iterSys U := trianglelefteq_iterSys U
  have h2 : iterSys U ? fixedNbhd cCombinator :=
    ⟨fixedNbhd cCombinator, Subsystem.refl _, fixedNbhd_cCombinator_isomorphic.symm⟩
  have h3 : fixedNbhd cCombinator ? funSpace D (fixedNbhd cCombinator) :=
    trianglelefteq_funSpace_const D (fixedNbhd cCombinator)
  have h4 : funSpace D (fixedNbhd cCombinator) ? D :=
    ⟨D, Subsystem.refl D, Dsol_isomorphic_funSpace_cCombinator.symm⟩
  exact trianglelefteq_trans (trianglelefteq_trans (trianglelefteq_trans h1 h2) h3) h4

theorem exercise_8_25_main :
    fixedNbhd (Exercise823.fixOp (tOpMap cCombinator)) ≅?
      funSpace (fixedNbhd (Exercise823.fixOp (tOpMap cCombinator)))
        (fixedNbhd (Exercise823.fixOp (tOpMap cCombinator))) :=
  funSpace_self_isomorphic Dsol_isomorphic_funSpace_cCombinator hVV_cCombinator
```

```
set_option linter.unusedVariables false

theorem example_825_fixed_point : @DomainTheory.NeighbourhoodSystems.Isomorphic Rat
  (@DomainTheory.NeighbourhoodSystems.ApproximableMap Rat Rat
    (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
    NeighbourhoodSystems.U
      (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
    NeighbourhoodSystems.U
        (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
    cCombinator)))
    (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
    NeighbourhoodSystems.U
      (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
    NeighbourhoodSystems.U
        (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
    cCombinator))))
  (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.NeighbourhoodSystems.
    U
    (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
    NeighbourhoodSystems.U
      (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
    cCombinator)))
  (@DomainTheory.NeighbourhoodSystems.funSpace Rat Rat
    (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
    NeighbourhoodSystems.U
      (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
    NeighbourhoodSystems.U
        (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
    cCombinator)))
    (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
    NeighbourhoodSystems.U
      (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
    NeighbourhoodSystems.U
        (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
    cCombinator)))) :=
  DomainTheory.NeighbourhoodSystems.exercise_8_25_main

theorem exercise_8_25 :
    fixedNbhd (Exercise823.fixOp (tOpMap cCombinator)) ≅?
      funSpace (fixedNbhd (Exercise823.fixOp (tOpMap cCombinator)))
        (fixedNbhd (Exercise823.fixOp (tOpMap cCombinator))) :=
  exercise_8_25_main

theorem exercise_8_25_universal : U ? fixedNbhd (Exercise823.fixOp (tOpMap cCombinator
    )) :=
  U_trianglelefteq_Dsol

set_option linter.unusedVariables false

theorem example_825 : And
  (@DomainTheory.NeighbourhoodSystems.Isomorphic Rat
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap Rat Rat
      (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
    NeighbourhoodSystems.U
        (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
```

```
  NeighbourhoodSystems.U
        (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
  cCombinator)))
    (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
  NeighbourhoodSystems.U
      (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
  NeighbourhoodSystems.U
        (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
  cCombinator))))
   (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
  NeighbourhoodSystems.U
    (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
  NeighbourhoodSystems.U
      (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
  cCombinator)))
   (@DomainTheory.NeighbourhoodSystems.funSpace Rat Rat
    (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
  NeighbourhoodSystems.U
      (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
  NeighbourhoodSystems.U
        (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
  cCombinator)))
    (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
  NeighbourhoodSystems.U
      (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
  NeighbourhoodSystems.U
        (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
  cCombinator)))))
(@DomainTheory.NeighbourhoodSystems.Trianglelefteq Rat Rat DomainTheory.
  NeighbourhoodSystems.U
   (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
  NeighbourhoodSystems.U
    (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
  NeighbourhoodSystems.U
      (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
  cCombinator)))) :=
@And.intro
(@DomainTheory.NeighbourhoodSystems.Isomorphic Rat
  (@DomainTheory.NeighbourhoodSystems.ApproximableMap Rat Rat
    (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
  NeighbourhoodSystems.U
      (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
  NeighbourhoodSystems.U
        (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
  cCombinator)))
    (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
  NeighbourhoodSystems.U
      (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
  NeighbourhoodSystems.U
        (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
  cCombinator))))
   (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
  NeighbourhoodSystems.U
    (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
  NeighbourhoodSystems.U
      (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
```

```
    cCombinator)))
     (@DomainTheory.NeighbourhoodSystems.funSpace Rat Rat
       (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
    NeighbourhoodSystems.U
         (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
    NeighbourhoodSystems.U
           (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
    cCombinator)))
       (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
    NeighbourhoodSystems.U
         (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
    NeighbourhoodSystems.U
           (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
    cCombinator)))))
   (@DomainTheory.NeighbourhoodSystems.Trianglelefteq Rat Rat DomainTheory.
    NeighbourhoodSystems.U
     (@DomainTheory.NeighbourhoodSystems.fixedNbhd Rat DomainTheory.
    NeighbourhoodSystems.U
       (@DomainTheory.NeighbourhoodSystems.Exercise823.fixOp Rat DomainTheory.
    NeighbourhoodSystems.U
         (DomainTheory.NeighbourhoodSystems.tOpMap DomainTheory.NeighbourhoodSystems.
    cCombinator))))
  DomainTheory.NeighbourhoodSystems.exercise_8_25 DomainTheory.NeighbourhoodSystems.
    exercise_8_25_universal

end DomainTheory.NeighbourhoodSystems
```

Exercise_8_25.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    ReflexiveDomain

@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap Exercise823

theorem exercise_8_25 :
    (fixedNbhd (fixOp (tOpMap cCombinator)) ≅?
      funSpace (fixedNbhd (fixOp (tOpMap cCombinator)))
        (fixedNbhd (fixOp (tOpMap cCombinator)))) ∧
      (U ? fixedNbhd (fixOp (tOpMap cCombinator))) :=
  ⟨exercise_8_25_main, exercise_8_25_universal⟩

end
```

Builds a non-trivial reflexive domain $D \cong D \to D$ containing `U`.
The tip then assembles those tools into Scott's statement.
— `exercise_8_25`

3.9.28 Exercise 8.26 — untyped calculus in U

Discuss in more detail the "pay-off" for U, namely the translation of "untyped" λ-calculus into U as shown by the equations at the end of the lecture after the proof of 8.9. In particular show how the whole of the **typed** λ-calculus can be retranslated back into U with the aid of projections. (Hint: Whenever you want to write

$$f : D_a \to D_b,$$

write instead

$$f = b \circ f \circ a,$$

where a, b are finitary projections. Whenever you want to form a λ-abstraction

$$\lambda x^{D_a}.\, \sigma,$$

where σ is of type D_b, instead form

$$\lambda x.\, b(\sigma'[a(x)/x]),$$

where σ' is the further translation of σ into untyped λ-calculus. Be sure to show that this result "has the right type" in the sense defined above.)

Tip summary The tip asserts β-soundness of the self-hosted encoding: `Uapply (Ulam f) x = f(x)`.

Development Encodes self-application and self-abstraction inside `U` and proves β-soundness.

`UapplyUlam.lean`

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9

public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap

noncomputable def Uapply (u x : U.Element) : U.Element :=
  (evalMap U U).toElementMap (pair (jArrow.toElementMap u) x)

end DomainTheory.NeighbourhoodSystems

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

noncomputable def Ulam (f : ApproximableMap U U) : U.Element :=
```

```
  iArrow.toElementMap (toFilter f)

section
universe u
variable {α : Type u} {E : NeighborhoodSystem α}

def translateAbs (a b body : ApproximableMap E E) : ApproximableMap E E :=
  b.comp (body.comp a)
end

theorem Uapply_Ulam (f : ApproximableMap U U) (x : U.Element) :
    Uapply (Ulam f) x = f.toElementMap x := by
  have hround : toApproxMap (toFilter f) = f := by
    have he := (funSpaceEquiv U U).apply_symm_apply f
    rwa [funSpaceEquiv_apply, funSpaceEquiv_symm_apply] at he
  unfold Uapply Ulam
  have h1 : jArrow.toElementMap (iArrow.toElementMap (toFilter f))
      = (jArrow.comp iArrow).toElementMap (toFilter f) :=
    (toElementMap_comp jArrow iArrow (toFilter f)).symm
  rw [h1, jArrow_comp_iArrow, toElementMap_idMap, evalMap_apply, hround]

section
universe u
variable {α : Type u} {E : NeighborhoodSystem α}

theorem translateAbs_idMap {a b : ApproximableMap E E} : translateAbs a b (idMap E) =
    b.comp a := by
  unfold translateAbs
  rw [idMap_comp]
end

set_option linter.unusedVariables false

theorem example_826.{u} : ∀ {α : Type u} {E : DomainTheory.NeighbourhoodSystems.
    NeighborhoodSystem α}
  {a b : @DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E},
  @Eq (@DomainTheory.NeighbourhoodSystems.ApproximableMap α α E E)
    (@DomainTheory.NeighbourhoodSystems.translateAbs α E a b
      (@DomainTheory.NeighbourhoodSystems.ApproximableMap.idMap α E))
    (@DomainTheory.NeighbourhoodSystems.ApproximableMap.comp α α α E E E b a) :=
  @DomainTheory.NeighbourhoodSystems.translateAbs_idMap

section
universe u
variable {α : Type u} {E : NeighborhoodSystem α}

theorem translateAbs_sandwich {a b body : ApproximableMap E E}
    (ha : Retraction a) (hb : Retraction b) :
    b.comp ((translateAbs a b body).comp a) = translateAbs a b body := by
  show b.comp ((b.comp (body.comp a)).comp a) = b.comp (body.comp a)
  rw [comp_assoc b (body.comp a) a, comp_assoc body a a, ha.out, ← comp_assoc b b (
    body.comp a), hb.out]

theorem translateApp_hasType {a b f : ApproximableMap E E} (hsandwich : b.comp (f.comp
     a) = f)
    {x : E.Element} (hx : a.toElementMap x = x) :
```

```
    b.toElementMap (f.toElementMap x) = f.toElementMap x := by
  conv_rhs => rw [← hsandwich, toElementMap_comp, toElementMap_comp, hx]

end

end DomainTheory.NeighbourhoodSystems
```

Exercise_8_26.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    UapplyUlam

@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap

theorem exercise_8_26 (f : ApproximableMap U U) (x : U.Element) :
    Uapply (Ulam f) x = f.toElementMap x :=
  Uapply_Ulam f x

end
```

The tip then assembles those tools into Scott's statement.
— `exercise_8_26`

3.9.29 Exercise 8.27 — infinite cartesian products

(Suggested by James Donahue.)

Finite cartesian products of domains are formed by the $D_0 \times D_1$-construct we have used so often. The problem is to define — computably — some *infinite* cartesian products. In particular, as applied to the universal domain U, the combinator `sub` is to be regarded as a finitary projection of U whose fixed points are exactly *all* the finitary projections. A map

$$d = \mathrm{sub} \circ d \circ \mathrm{sub}$$

can be regarded as a *polymorphic type* (because, whenever t is a finitary projection (= type), then so is $d(t)$). The *continuous product* of *all* these types would be the domain of all approximable functions x such that

$$x(t) = d(t)(x(t))$$

for all types t. (Why does this equation mean that x is in the product?) Define Π as a combinator by

$$\Pi = \lambda d\, \lambda x\, \lambda t.\, \mathrm{sub}(d(\mathrm{sub}(t)))(x(\mathrm{sub}(t))).$$

Show that for d a polymorphic type, $\Pi(d)$ is a type. (Hint: It is easy to check that $\Pi(d)$ is a projection; the problem is to show it is *finitary*.)

Tip summary The tip asserts that for any polymorphic type `d`, $\Pi(d)$ is a finitary projection.

Development Defines polymorphic types and proves the `piD` side of finitariness.

subU.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_9
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.subApprox
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Theorem_8_6
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

theorem jArrow_comp_iArrow_apply (v : (funSpace U U).Element) :
    jArrow.toElementMap (iArrow.toElementMap v) = v := by
  rw [show jArrow.toElementMap (iArrow.toElementMap v) = (jArrow.comp iArrow).
    toElementMap v from
    (toElementMap_comp jArrow iArrow v).symm, jArrow_comp_iArrow, toElementMap_idMap]

noncomputable def subU : ApproximableMap U U :=
  iArrow.comp (subApprox.comp jArrow)

namespace subU

theorem toElementMap_eq (w : U.Element) :
    ApproximableMap.toElementMap subU w =
      iArrow.toElementMap (ApproximableMap.toElementMap subApprox (jArrow.toElementMap
     w)) := by
  unfold subU
  rw [toElementMap_comp, toElementMap_comp]

theorem subApprox_fix_of_fix {w : U.Element}
    (hw : ApproximableMap.toElementMap subU w = w) :
    ApproximableMap.toElementMap subApprox (jArrow.toElementMap w) = jArrow.
    toElementMap w := by
  rw [toElementMap_eq] at hw
  have hstep := congrArg jArrow.toElementMap hw
  rwa [jArrow_comp_iArrow_apply] at hstep

theorem fix_of_subApprox_fix {φ : (funSpace U U).Element}
    (hφ : ApproximableMap.toElementMap subApprox φ = φ) :
    ApproximableMap.toElementMap subU (iArrow.toElementMap φ) = iArrow.toElementMap φ
    := by
  rw [toElementMap_eq, jArrow_comp_iArrow_apply, hφ]

noncomputable def fixIso :
    {w : U.Element // ApproximableMap.toElementMap subU w = w} ≃o
      {φ : (funSpace U U).Element // ApproximableMap.toElementMap subApprox φ = φ}
    where
  toFun w := ⟨jArrow.toElementMap w.1, subApprox_fix_of_fix w.2⟩
  invFun φ := ⟨iArrow.toElementMap φ.1, fix_of_subApprox_fix φ.2⟩
```

```
  left_inv w := by
    apply Subtype.ext
    show iArrow.toElementMap (jArrow.toElementMap w.1) = w.1
    have hw := toElementMap_eq w.1
    rw [w.2] at hw
    rw [subApprox_fix_of_fix w.2] at hw
    exact hw.symm
  right_inv φ := by
    apply Subtype.ext
    exact jArrow_comp_iArrow_apply φ.1
  map_rel_iff' := by
    intro w w'
    show jArrow.toElementMap w.1 ≤ jArrow.toElementMap w'.1 ↔ w.1 ≤ w'.1
    constructor
    · intro hle
      have h2 := iArrow.toElementMap_mono hle
      have e1 : iArrow.toElementMap (jArrow.toElementMap w.1) = w.1 := by
        have hw := toElementMap_eq w.1
        rw [w.2, subApprox_fix_of_fix w.2] at hw
        exact hw.symm
      have e2 : iArrow.toElementMap (jArrow.toElementMap w'.1) = w'.1 := by
        have hw' := toElementMap_eq w'.1
        rw [w'.2, subApprox_fix_of_fix w'.2] at hw'
        exact hw'.symm
      rwa [e1, e2] at h2
    · intro hle
      exact jArrow.toElementMap_mono hle

noncomputable def fixIsoSubFixed :
    {w : U.Element // ApproximableMap.toElementMap subU w = w} ≃o
      {f : ApproximableMap U U // sub f = f} :=
  fixIso.trans subApprox.fixIso

theorem isRetraction_conjArrow {H : ApproximableMap (funSpace U U) (funSpace U U)}
    (hH : Retraction H) : Retraction (iArrow.comp (H.comp jArrow)) := by
  constructor
  show (iArrow.comp (H.comp jArrow)).comp (iArrow.comp (H.comp jArrow)) =
    iArrow.comp (H.comp jArrow)
  rw [comp_assoc iArrow (H.comp jArrow) (iArrow.comp (H.comp jArrow)),
    comp_assoc H jArrow (iArrow.comp (H.comp jArrow)),
    ← comp_assoc jArrow iArrow (H.comp jArrow), jArrow_comp_iArrow, idMap_comp,
    ← comp_assoc H H jArrow, hH.out]

theorem le_idMap_conjArrow {H : ApproximableMap (funSpace U U) (funSpace U U)}
    (hH : H ≤ idMap (funSpace U U)) : iArrow.comp (H.comp jArrow) ≤ idMap U :=
  calc iArrow.comp (H.comp jArrow)
      ≤ iArrow.comp ((idMap (funSpace U U)).comp jArrow) :=
        comp_mono_gen le_rfl (comp_mono_gen hH le_rfl)
    _ = iArrow.comp jArrow := by rw [idMap_comp]
    _ ≤ idMap U := iArrow_comp_jArrow_le

theorem isProjection_conjArrow {H : ApproximableMap (funSpace U U) (funSpace U U)}
    (hH : IsProjection H) : IsProjection (iArrow.comp (H.comp jArrow)) :=
  ⟨isRetraction_conjArrow hH.1, le_idMap_conjArrow hH.2⟩

theorem isProjection : IsProjection subU :=
```

```
  isProjection_conjArrow Sub8_6.isProjection_subApprox

theorem isFinitary : IsFinitary subU := by
  obtain ⟨β, F, ⟨iso⟩⟩ := subApprox.isFinitary (E := U)
  exact ⟨β, F, ⟨fixIso.trans iso⟩⟩

theorem isFinitaryProjection : FinitaryProjection subU :=
  ⟨⟨isProjection, isFinitary⟩⟩

end subU

end DomainTheory.NeighbourhoodSystems
```

piD.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.subU
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

noncomputable def piDApply (d f : ApproximableMap U U) : ApproximableMap U U :=
  (evalMap U U).comp (paired (jArrow.comp (subU.comp (d.comp subU))) (f.comp subU))

noncomputable def piDUncurried (d : ApproximableMap U U) : ApproximableMap (prod (
    funSpace U U) U) U :=
  (evalMap U U).comp
    (paired
      (jArrow.comp (subU.comp (d.comp (subU.comp (proj₁ (funSpace U U) U)))))
      ((evalMap U U).comp
        (paired (proj₀ (funSpace U U) U) (subU.comp (proj₁ (funSpace U U) U)))))

noncomputable def piD (d : ApproximableMap U U) : ApproximableMap (funSpace U U) (
    funSpace U U) :=
  curry (piDUncurried d)

noncomputable def piDTypeMap (d : ApproximableMap U U) : ApproximableMap U (funSpace U
     U) :=
  jArrow.comp (subU.comp d)

noncomputable def piDType (d : ApproximableMap U U) (s : U.Element) : ApproximableMap
    U U :=
  toApproxMap ((piDTypeMap d).toElementMap s)

end DomainTheory.NeighbourhoodSystems
```

PolymorphicType.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.ASharp
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.subU
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.piD
public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    Definition_8_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Proposition_3_9
public import DomainTheory.NeighbourhoodSystems.DomainConstructs.Theorem_3_13
public import DomainTheory.NeighbourhoodSystems.DomainsGivenByNeighbourhoods.
    Factoid_1_7

public import Mathlib.Combinatorics.Colex
public import DomainTheory.NeighbourhoodSystems.MappingsBetweenDomains.Proposition_2_6

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems
open NeighborhoodSystem ApproximableMap

class PolymorphicType (d : ApproximableMap U U) : Prop where
  out : subU.comp (d.comp subU) = d

def scFamily (t : U.Element) : Type := {T : Set ? // subU.rel T T ∧ t.mem T}

instance instNonemptyScFamily (t : U.Element) : Nonempty (scFamily t) :=
  ⟨⟨U.master, subU.master_rel, t.master_mem⟩⟩

def scPrincipal {t : U.Element} (i : scFamily t) : U.Element :=
  U.principal (t.sub i.2.2)

theorem toElementMap_mem_fix_of_isRetraction_sandwich {a g : ApproximableMap U U}
    (ha : Retraction a) (z : U.Element) :
    a.toElementMap ((a.comp (g.comp a)).toElementMap z) = (a.comp (g.comp a)).
    toElementMap z := by
  rw [toElementMap_comp, ← toElementMap_comp a a, ha.out]

theorem polymorphicType_apply_mem_fix {d : ApproximableMap U U} (hd : PolymorphicType
    d)
    (z : U.Element) : subU.toElementMap (d.toElementMap z) = d.toElementMap z := by
  have h := toElementMap_mem_fix_of_isRetraction_sandwich subU.isProjection.1 (g := d)
     z
  rwa [hd.out] at h

theorem isFinitaryProjection_toApproxMap_jArrow_of_fix {w : U.Element}
    (hw : subU.toElementMap w = w) :
    FinitaryProjection (toApproxMap (jArrow.toElementMap w)) := by
  apply isFinitaryProjection_of_sub_eq_self
  have hfix := subU.subApprox_fix_of_fix hw
  have hstep := congrArg toApproxMap hfix
  rwa [subApprox.toElementMap_eq, Sub8_6.toApproxMap_subFilter] at hstep

theorem isFinitaryProjection_decode_subU (z : U.Element) :
    FinitaryProjection (toApproxMap (jArrow.toElementMap (subU.toElementMap z))) :=
  isFinitaryProjection_toApproxMap_jArrow_of_fix
    (toElementMap_idem_of_isRetraction subU.isProjection.1 z)
```

```
theorem toElementMap_piDUncurried (d : ApproximableMap U U) (φ : (funSpace U U).
    Element)
    (t : U.Element) :
    (piDUncurried d).toElementMap (pair φ t) =
      (toApproxMap (jArrow.toElementMap (subU.toElementMap (d.toElementMap
          (subU.toElementMap t))))).toElementMap
        ((toApproxMap φ).toElementMap (subU.toElementMap t)) := by
  simp only [piDUncurried, toElementMap_comp, toElementMap_paired, toElementMap_proj₀,
    toElementMap_proj₁, fst_pair, snd_pair, evalMap_apply]

theorem toElementMap_piDApply (d f : ApproximableMap U U) (t : U.Element) :
    (piDApply d f).toElementMap t =
      (toApproxMap (jArrow.toElementMap (subU.toElementMap (d.toElementMap
          (subU.toElementMap t))))).toElementMap (f.toElementMap (subU.toElementMap t)
    ) := by
  simp only [piDApply, toElementMap_comp, toElementMap_paired, evalMap_apply]

theorem toApproxMap_toElementMap_piD (d : ApproximableMap U U) (φ : (funSpace U U).
    Element) :
    toApproxMap ((piD d).toElementMap φ) = piDApply d (toApproxMap φ) := by
  apply ApproximableMap.ext_of_toElementMap
  intro t
  rw [piD, toElementMap_curry_apply, toElementMap_piDUncurried, toElementMap_piDApply]

theorem piD_rel_iff (d : ApproximableMap U U) {X W : Set (ApproximableMap U U)} :
    (piD d).rel X W ↔ ∃ hX : (funSpace U U).mem X, (funSpace U U).mem W ∧
      gSection (piDUncurried d) hX ∈ W :=
  curry_rel

theorem gSection_piDUncurried_rel_iff (d : ApproximableMap U U)
    {X : Set (ApproximableMap U U)} (hX : (funSpace U U).mem X) {Y Z : Set ?} (hY : U.
    mem Y) :
    (gSection (piDUncurried d) hX).rel Y Z ↔
      ((piDApply d (toApproxMap ((funSpace U U).principal hX))).toElementMap
        (U.principal hY)).mem Z := by
  rw [gSection_rel, rel_iff_mem_principal (piDUncurried d) (prod_mem_prodNbhd hX hY),
    ← pair_principal_eq_principal_prodNbhd hX hY, toElementMap_piDUncurried,
    ← toElementMap_piDApply]

theorem piD_toElementMap_mem_iff (d : ApproximableMap U U) (x : (funSpace U U).Element
    )
    {Y : Set (ApproximableMap U U)} :
    ((piD d).toElementMap x).mem Y ↔
      (funSpace U U).mem Y ∧ piDApply d (toApproxMap x) ∈ Y := by
  conv_lhs => rw [← Sub8_6.toFilter_toApproxMap ((piD d).toElementMap x)]
  rw [mem_toFilter, toApproxMap_toElementMap_piD]

theorem hii_easy_direction (d : ApproximableMap U U) (x : (funSpace U U).Element)
    {Y : Set (ApproximableMap U U)} (hYE : (funSpace U U).mem Y)
    {X : Set (ApproximableMap U U)} (hXx : x.mem X) (hXY : X ⊆ Y) (hXX : (piD d).rel X
     X) :
    ((piD d).toElementMap x).mem Y :=
  mem_of_exists_rel_self x hYE hXx hXY hXX

theorem subU_principal_eq_of_rel_self {T : Set ?} (hT : U.mem T) (hTT : subU.rel T T)
```

```
    :
    subU.toElementMap (U.principal hT) = U.principal hT := by
  apply le_antisymm
  · exact toElementMap_le_self_of_le_idMap subU.isProjection.2 _
  · exact principal_le_of_mem ((subU.rel_iff_mem_principal hT).mp hTT)

theorem exists_rel_self_subset_of_mem {t : U.Element} (ht : subU.toElementMap t = t)
    {T₀ : Set ?} (hT₀ : t.mem T₀) : ∃ T, subU.rel T T ∧ t.mem T ∧ T ⊆ T₀ := by
  have hmem : (subU.toElementMap t).mem T₀ := by rw [ht]; exact hT₀
  obtain ⟨_, T, hTt, hTT₀, hTT⟩ :=
    (formula_of_isFinitaryProjection subU.isFinitaryProjection t).mp hmem
  exact ⟨T, hTT, hTt, hTT₀⟩

theorem scFamily_directed {t : U.Element} (ht : subU.toElementMap t = t) :
    ∀ i j : scFamily t, ∃ k : scFamily t, scPrincipal i ≤ scPrincipal k ∧ scPrincipal
    j ≤ scPrincipal k :=
  fun i j => by
    obtain ⟨T, hTT, htT, hTsub⟩ := exists_rel_self_subset_of_mem ht (t.inter_mem i.2.2
    j.2.2)
    refine ⟨⟨T, hTT, htT⟩, ?_, ?_⟩
    · exact (U.principal_le_iff (t.sub i.2.2) (t.sub htT)).mpr (hTsub.trans Set.
    inter_subset_left)
    · exact (U.principal_le_iff (t.sub j.2.2) (t.sub htT)).mpr (hTsub.trans Set.
    inter_subset_right)

theorem eq_iSupDirected_scPrincipal {t : U.Element} (ht : subU.toElementMap t = t) :
    t = NeighborhoodSystem.iSupDirected scPrincipal (scFamily_directed ht) := by
  apply Element.ext
  intro Z
  rw [mem_iSupDirected]
  constructor
  · intro hZ
    obtain ⟨T, hTT, htT, hTZ⟩ := exists_rel_self_subset_of_mem ht hZ
    exact ⟨⟨T, hTT, htT⟩, (U.mem_principal _).mpr ⟨t.sub hZ, hTZ⟩⟩
  · rintro ⟨i, hi⟩
    obtain ⟨hZmem, hTZ⟩ := (U.mem_principal _).mp hi
    exact t.up_mem i.2.2 hZmem hTZ

theorem isFinitaryProjection_piD_of_formula (d : ApproximableMap U U)
    (hii : ∀ (x : (funSpace U U).Element) {Y}, ((piD d).toElementMap x).mem Y ↔
      (funSpace U U).mem Y ∧ ∃ X, x.mem X ∧ X ⊆ Y ∧ (piD d).rel X X) :
    FinitaryProjection (piD d) :=
  isFinitaryProjection_of_formula (piD d) hii

theorem le_idMap_piD (d : ApproximableMap U U) : piD d ≤ idMap (funSpace U U) := by
  rw [le_iff_toElementMap_le]
  intro φ
  rw [toElementMap_idMap, ← (funSpaceEquiv U U).le_iff_le, funSpaceEquiv_apply,
    funSpaceEquiv_apply, toApproxMap_toElementMap_piD, le_iff_toElementMap_le]
  intro t
  rw [toElementMap_piDApply]
  have hP := (isFinitaryProjection_decode_subU (d.toElementMap (subU.toElementMap t)))
    .out.1.2
  calc (toApproxMap (jArrow.toElementMap (subU.toElementMap
        (d.toElementMap (subU.toElementMap t))))).toElementMap
        ((toApproxMap φ).toElementMap (subU.toElementMap t))
```

```
      ≤ (toApproxMap φ).toElementMap (subU.toElementMap t) :=
        toElementMap_le_self_of_le_idMap hP _
    _ ≤ (toApproxMap φ).toElementMap t :=
        (toApproxMap φ).toElementMap_mono
          (toElementMap_le_self_of_le_idMap subU.isProjection.2 t)

theorem piDApply_toElementMap_eq (d f : ApproximableMap U U) (t : U.Element) :
    (piDApply d f).toElementMap (subU.toElementMap t) =
      (toApproxMap (jArrow.toElementMap (subU.toElementMap (d.toElementMap
          (subU.toElementMap t))))).toElementMap (f.toElementMap (subU.toElementMap t)
    ) := by
  rw [toElementMap_piDApply, toElementMap_idem_of_isRetraction subU.isProjection.1 t]

theorem isRetraction_piD (d : ApproximableMap U U) : Retraction (piD d) := by
  constructor
  apply ApproximableMap.ext_of_toElementMap
  intro φ
  apply (funSpaceEquiv U U).injective
  rw [funSpaceEquiv_apply, funSpaceEquiv_apply, toElementMap_comp,
    toApproxMap_toElementMap_piD d ((piD d).toElementMap φ),
    toApproxMap_toElementMap_piD d φ]
  apply ApproximableMap.ext_of_toElementMap
  intro t
  rw [toElementMap_piDApply d (piDApply d (toApproxMap φ)) t,
    piDApply_toElementMap_eq d (toApproxMap φ) t,
    toElementMap_piDApply d (toApproxMap φ) t]
  exact toElementMap_idem_of_isRetraction
    (isFinitaryProjection_decode_subU (d.toElementMap (subU.toElementMap t))).out.1.1
    _

theorem isProjection_piD (d : ApproximableMap U U) : IsProjection (piD d) :=
  ⟨isRetraction_piD d, le_idMap_piD d⟩

theorem piDType_monotone (d : ApproximableMap U U) {s s' : U.Element} (h : s ≤ s') :
    piDType d s ≤ piDType d s' :=
  Sub8_6.toApproxMap_monotone ((piDTypeMap d).toElementMap_mono h)

theorem piD_rel_self_iff (d : ApproximableMap U U) {X : Set (ApproximableMap U U)} :
    (piD d).rel X X ↔ ∃ hX : (funSpace U U).mem X, gSection (piDUncurried d) hX ∈ X :=
     by
  rw [piD_rel_iff]
  exact ⟨fun ⟨hX, _, hmem⟩ => ⟨hX, hmem⟩, fun ⟨hX, hmem⟩ => ⟨hX, hX, hmem⟩⟩

theorem toElementMap_piDTypeMap (d : ApproximableMap U U) (s : U.Element) :
    (piDTypeMap d).toElementMap s = jArrow.toElementMap (subU.toElementMap (d.
    toElementMap s)) := by
  unfold piDTypeMap
  rw [toElementMap_comp, toElementMap_comp]

theorem isFinitaryProjection_piDType (d : ApproximableMap U U) (s : U.Element) :
    FinitaryProjection (piDType d s) := by
  unfold piDType
  rw [toElementMap_piDTypeMap]
  exact isFinitaryProjection_decode_subU (d.toElementMap s)

theorem toElementMap_piDApply' (d f : ApproximableMap U U) (t : U.Element) :
```

```
    (piDApply d f).toElementMap t =
      (piDType d (subU.toElementMap t)).toElementMap (f.toElementMap (subU.
    toElementMap t)) := by
  rw [toElementMap_piDApply, piDType, toElementMap_piDTypeMap]

theorem exists_X_of_mem_step (d : ApproximableMap U U) (x : (funSpace U U).Element)
    {Y₀ Z₀ : Set ?} (hmem : piDApply d (toApproxMap x) ∈ step Y₀ Z₀) :
    ∃ X, x.mem X ∧ X ⊆ (step Y₀ Z₀ : Set (ApproximableMap U U)) ∧ (piD d).rel X X :=
    by
  have hrelY0Z0 : (piDApply d (toApproxMap x)).rel Y₀ Z₀ := hmem
  have hY₀ : U.mem Y₀ := (piDApply d (toApproxMap x)).rel_dom hrelY0Z0
  have hZ₀ : U.mem Z₀ := (piDApply d (toApproxMap x)).rel_cod hrelY0Z0
  set t : U.Element := subU.toElementMap (U.principal hY₀) with ht_def
  have ht : subU.toElementMap t = t := toElementMap_idem_of_isRetraction subU.
    isProjection.1 _
  have hmem' : ((piDType d t).toElementMap ((toApproxMap x).toElementMap t)).mem Z₀ :=
    by
    have h := ((piDApply d (toApproxMap x)).rel_iff_mem_principal hY₀).mp hrelY0Z0
    rwa [toElementMap_piDApply'] at h
  obtain ⟨_, W, hW_mem, hWZ₀, hWW⟩ :=
    (formula_of_isFinitaryProjection (isFinitaryProjection_piDType d t)
      ((toApproxMap x).toElementMap t)).mp hmem'
  have hw_sup := eq_iSupDirected_scPrincipal ht

  rw [hw_sup, toElementMap_iSupDirected, mem_iSupDirected] at hW_mem
  obtain ⟨i₀, hi₀⟩ := hW_mem
  have hrelT0 : (toApproxMap x).rel i₀.1 W :=
    (rel_iff_mem_principal (toApproxMap x) (t.sub i₀.2.2)).mpr hi₀

  have hWW2 : ∃ i : scFamily t, (piDType d (scPrincipal i)).rel W W := by
    have h2 : (piDType d t).rel W W := hWW
    unfold piDType at h2
    rw [hw_sup, toElementMap_iSupDirected, Sub8_6.toApproxMap_rel_iSupDirected] at h2
    exact h2
  obtain ⟨i₁, hi₁⟩ := hWW2

  obtain ⟨k, hik0, hik1⟩ := scFamily_directed ht i₀ i₁
  have hksub0 : k.1 ⊆ i₀.1 := (U.principal_le_iff (t.sub i₀.2.2) (t.sub k.2.2)).mp hik0
  have hTfinal : U.mem k.1 := subU.rel_dom k.2.1
  have hWmem : U.mem W := (piDType d t).rel_dom hWW
  have hrelTfinal : (toApproxMap x).rel k.1 W :=
    (toApproxMap x).mono hrelT0 hksub0 subset_rfl hTfinal hWmem
  have hPfinal : (piDType d (scPrincipal k)).rel W W := piDType_monotone d hik1 W W hi₁

  have hTfinal_fix : subU.toElementMap (U.principal hTfinal) = U.principal hTfinal :=
    subU_principal_eq_of_rel_self hTfinal k.2.1
  set X : Set (ApproximableMap U U) := step k.1 W with hX_def
  have hXvalid : (funSpace U U).mem X := step_mem hTfinal hWmem
  refine ⟨X, ?_, ?_, ?_⟩
  .
    exact toApproxMap_rel.mp hrelTfinal
  .
    have hle : t ≤ U.principal hY₀ := toElementMap_le_self_of_le_idMap subU.
    isProjection.2 _
    have hY0sub : Y₀ ⊆ k.1 := ((U.mem_principal hY₀).mp (hle k.1 k.2.2)).2
    exact step_subset hY₀ hZ₀ hY0sub hWZ₀
```

```
  .
    rw [piD_rel_self_iff]
    refine ⟨hXvalid, ?_⟩
    show (gSection (piDUncurried d) hXvalid).rel k.1 W
    rw [gSection_piDUncurried_rel_iff d hXvalid hTfinal]
    set g : ApproximableMap U U := toApproxMap ((funSpace U U).principal hXvalid) with
     hg_def
    show ((piDApply d g).toElementMap (U.principal hTfinal)).mem W
    rw [toElementMap_piDApply', hTfinal_fix]
    have hg : g.rel k.1 W := by
      rw [hg_def, toApproxMap_rel]
      exact ((funSpace U U).mem_principal hXvalid).mpr ⟨hXvalid, subset_rfl⟩
    have hgmem : (g.toElementMap (U.principal hTfinal)).mem W :=
      (rel_iff_mem_principal g hTfinal).mp hg
    exact mem_of_exists_rel_self (g.toElementMap (U.principal hTfinal))
      ((piDType d (U.principal hTfinal)).rel_dom hPfinal) hgmem subset_rfl hPfinal

theorem exists_X_of_mem_stepFun (d : ApproximableMap U U) (x : (funSpace U U).Element)
    (L : List (Set ? × Set ?)) (hmem : piDApply d (toApproxMap x) ∈ stepFun L) :
    ∃ X, x.mem X ∧ X ⊆ (stepFun L : Set (ApproximableMap U U)) ∧ (piD d).rel X X := by
  induction L with
  | nil =>
    refine ⟨(funSpace U U).master, x.master_mem, ?_, (piD d).master_rel⟩
    simp
  | cons p L ih =>
    rw [stepFun_cons] at hmem
    obtain ⟨hmemP, hmemL⟩ := hmem
    obtain ⟨Xp, hXpx, hXpsub, hXpXp⟩ := exists_X_of_mem_step d x hmemP
    obtain ⟨XL, hXLx, hXLsub, hXLXL⟩ := ih hmemL
    refine ⟨Xp ∩ XL, x.inter_mem hXpx hXLx, ?_, ?_⟩
    · rw [stepFun_cons]
      exact Set.inter_subset_inter hXpsub hXLsub
    · have hvalidP : (funSpace U U).mem Xp := x.sub hXpx
      have hvalidL : (funSpace U U).mem XL := x.sub hXLx
      have hvalidInter : (funSpace U U).mem (Xp ∩ XL) := x.sub (x.inter_mem hXpx hXLx)
      have h1 : (piD d).rel (Xp ∩ XL) Xp :=
        (piD d).mono hXpXp Set.inter_subset_left subset_rfl hvalidInter hvalidP
      have h2 : (piD d).rel (Xp ∩ XL) XL :=
        (piD d).mono hXLXL Set.inter_subset_right subset_rfl hvalidInter hvalidL
      exact (piD d).inter_right h1 h2

theorem hii_hard_direction (d : ApproximableMap U U) (x : (funSpace U U).Element)
    {Y : Set (ApproximableMap U U)} (hYE : (funSpace U U).mem Y)
    (hmem : piDApply d (toApproxMap x) ∈ Y) :
    ∃ X, x.mem X ∧ X ⊆ Y ∧ (piD d).rel X X := by
  obtain ⟨⟨L, _, rfl⟩, _⟩ := hYE
  exact exists_X_of_mem_stepFun d x L hmem

theorem hii_piD (d : ApproximableMap U U) (x : (funSpace U U).Element)
    {Y : Set (ApproximableMap U U)} :
    ((piD d).toElementMap x).mem Y ↔
      (funSpace U U).mem Y ∧ ∃ X, x.mem X ∧ X ⊆ Y ∧ (piD d).rel X X := by
  rw [piD_toElementMap_mem_iff]
  constructor
  · rintro ⟨hYE, hmem⟩
    exact ⟨hYE, hii_hard_direction d x hYE hmem⟩
```

```
  · rintro ⟨hYE, X, hXx, hXY, hXX⟩
    have := hii_easy_direction d x hYE hXx hXY hXX
    rwa [piD_toElementMap_mem_iff] at this

theorem isFinitaryProjection_piD (d : ApproximableMap U U) : FinitaryProjection (piD d
    ) :=
  isFinitaryProjection_piD_of_formula d (fun x => hii_piD d x)

end DomainTheory.NeighbourhoodSystems
```

piU.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.
    PolymorphicType

@[expose] public section

namespace DomainTheory.NeighbourhoodSystems

open NeighborhoodSystem ApproximableMap

noncomputable def piU (d : ApproximableMap U U) : ApproximableMap U U :=
  iArrow.comp ((piD d).comp jArrow)

namespace toElementMap

theorem piU (d : ApproximableMap U U) (w : U.Element) :
    (DomainTheory.NeighbourhoodSystems.piU d).toElementMap w =
      iArrow.toElementMap ((piD d).toElementMap (jArrow.toElementMap w)) := by
  unfold DomainTheory.NeighbourhoodSystems.piU
  rw [toElementMap_comp, toElementMap_comp]

end toElementMap

namespace piD

theorem fix_of_piU_fix {d : ApproximableMap U U} {w : U.Element}
    (hw : (piU d).toElementMap w = w) :
    (piD d).toElementMap (jArrow.toElementMap w) = jArrow.toElementMap w := by
  rw [toElementMap.piU] at hw
  have hstep := congrArg jArrow.toElementMap hw
  rwa [jArrow_comp_iArrow_apply] at hstep

end piD

namespace piU

theorem fix_of_piD_fix {d : ApproximableMap U U} {φ : (funSpace U U).Element}
    (hφ : (piD d).toElementMap φ = φ) :
    (piU d).toElementMap (iArrow.toElementMap φ) = iArrow.toElementMap φ := by
  rw [toElementMap.piU, jArrow_comp_iArrow_apply, hφ]

noncomputable def FixIso (d : ApproximableMap U U) :
```

```
    {w : U.Element // (piU d).toElementMap w = w} ≃o
      {φ : (funSpace U U).Element // (piD d).toElementMap φ = φ} where
  toFun w := ⟨jArrow.toElementMap w.1, piD.fix_of_piU_fix w.2⟩
  invFun φ := ⟨iArrow.toElementMap φ.1, fix_of_piD_fix φ.2⟩
  left_inv w := by
    apply Subtype.ext
    show iArrow.toElementMap (jArrow.toElementMap w.1) = w.1
    have hw := toElementMap.piU d w.1
    rw [w.2] at hw
    rw [piD.fix_of_piU_fix w.2] at hw
    exact hw.symm
  right_inv φ := by
    apply Subtype.ext
    exact jArrow_comp_iArrow_apply φ.1
  map_rel_iff' := by
    intro w w'
    show jArrow.toElementMap w.1 ≤ jArrow.toElementMap w'.1 ↔ w.1 ≤ w'.1
    constructor
    · intro hle
      have h2 := iArrow.toElementMap_mono hle
      have e1 : iArrow.toElementMap (jArrow.toElementMap w.1) = w.1 := by
        have hw := toElementMap.piU d w.1
        rw [w.2, piD.fix_of_piU_fix w.2] at hw
        exact hw.symm
      have e2 : iArrow.toElementMap (jArrow.toElementMap w'.1) = w'.1 := by
        have hw' := toElementMap.piU d w'.1
        rw [w'.2, piD.fix_of_piU_fix w'.2] at hw'
        exact hw'.symm
      rwa [e1, e2] at h2
    · intro hle
      exact jArrow.toElementMap_mono hle

end piU

namespace isFinitary

theorem piU_of_isFinitary_piD {d : ApproximableMap U U} (h : IsFinitary (piD d)) :
    IsFinitary (piU d) := by
  obtain ⟨β, F, ⟨iso⟩⟩ := h
  exact ⟨β, F, ⟨(piU.FixIso d).trans iso⟩⟩

theorem piU_of_formula {d : ApproximableMap U U}
    (hii : ∀ (x : (funSpace U U).Element) {Y}, ((piD d).toElementMap x).mem Y ↔
      (funSpace U U).mem Y ∧ ∃ X, x.mem X ∧ X ⊆ Y ∧ (piD d).rel X X) :
    IsFinitary (piU d) :=
  piU_of_isFinitary_piD (isFinitaryProjection_piD_of_formula d hii).out.2

end isFinitary

namespace isProjection

theorem piU (d : ApproximableMap U U) : IsProjection (DomainTheory.
    NeighbourhoodSystems.piU d) :=
  subU.isProjection_conjArrow (isProjection_piD d)

end isProjection
```

```
namespace isFinitaryProjection

theorem piU (d : ApproximableMap U U) : FinitaryProjection (DomainTheory.
    NeighbourhoodSystems.piU d) :=
  ⟨⟨isProjection.piU d, isFinitary.piU_of_isFinitary_piD (isFinitaryProjection_piD d).
    out.2⟩⟩

end isFinitaryProjection

end DomainTheory.NeighbourhoodSystems
```

Exercise_8_27.lean

```
module

public import DomainTheory.NeighbourhoodSystems.RetractsOfTheUniversalDomain.piU

@[expose] public section

open DomainTheory.NeighbourhoodSystems NeighborhoodSystem ApproximableMap

theorem exercise_8_27 (d : ApproximableMap U U) : FinitaryProjection (piU d) :=
  isFinitaryProjection.piU d

end
```

> Carves `piU` and folds `XXX_piU` companions as `XXX.piU`.
> — `piU`, `toElementMap.piU`, `isProjection.piU`, `isFinitaryProjection.piU`, ...
> The tip then assembles those tools into Scott's statement.
> — `exercise_8_27`

4 Information Systems (1982)

The purpose of the theory of domains is to give models for spaces on which to define computable functions. The kinds of spaces needed for denotational semantics involve not only spaces of higher type (e.g. function spaces) but also spaces defined recursively (e.g. reflexive domains). Also required are many special domain constructs (or functors) in order to create the desired structures. There are several choices of a suitable category of domains, but the basic one which has the simplest properties is the one sometimes called *consistently complete algebraic* cpo*'s*. This category of domains is studied in this chapter from a new, and it is to be hoped, simpler point of view incorporating the approaches of many authors into a unified presentation. Briefly, the domains of elements are represented set theoretically with the aid of structures called *information systems*. These systems are very familiar from mathematical logic, and their use seems to accord well with intuition. Many things that were done previously axiomatically can now be proved in a straightforward way as theorems. The present chapter discusses many examples in an informal way that should serve as an introduction to the subject.

Dependencies. Each box is one folder. The arrowhead points at the folder that imports, and the number is how many direct imports.

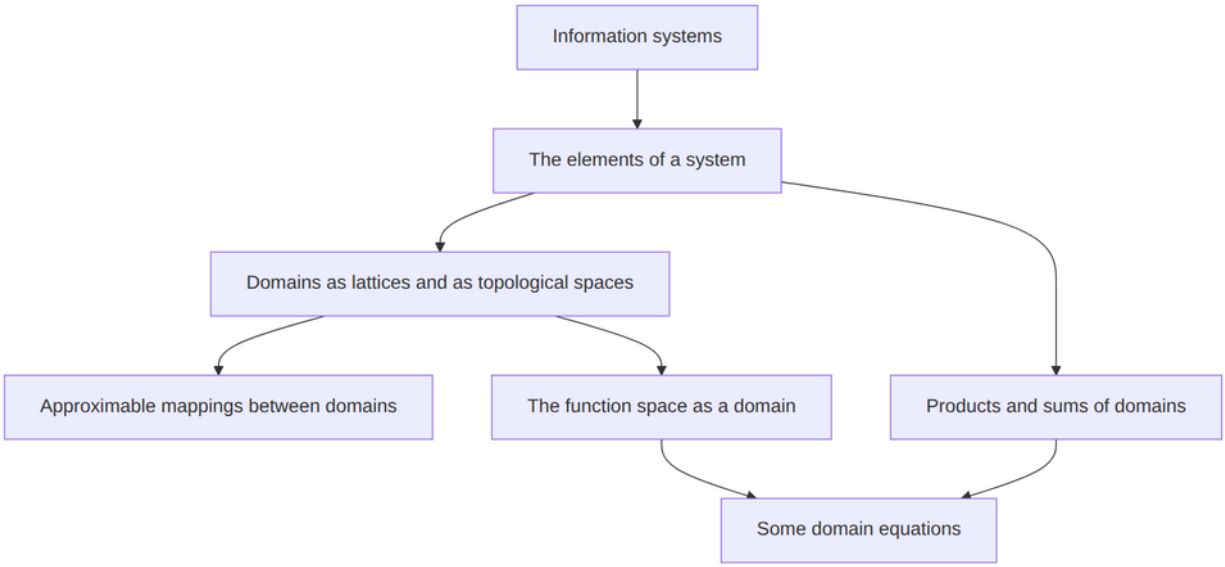

Figure 47: Information Systems (1982).

4.1 Introduction

The difficulty in the presentation of the subject is in justifying the level of abstraction used in comparison with the payoff: too often the effort needed for understanding the abstractions does not seem worth the trouble—especially if the notions are unfamiliar or excessively general.

For example, Category Theory, which is much used in discussions of the Theory of Domains, seems far too abstract to many people. On the other hand, Automata Theory—which has often benefited from some use of Category Theory—is quite abstract and, in many aspects perhaps, quite useless, but the level of abstraction is fairly low and the reasons for the definitions are usually evident. Thus, the subject has become by now a standard topic even for undergraduate courses. Michael Rabin and Scott had much to do with

influencing the subsequent development of the theory by formulating some years ago some basic concepts (many previously known) in a way that made sense to anyone who had been exposed to a little Abstract Algebra, Logic and Set Theory. This expository part of their paper did not require originality, but rather a certain frame of mind and a certain style of writing to put the ideas and problems in sharp relief. (The original paper is Rabin-Scott [1959]; see the excellent historical review of the subject in Greibach [1981].)

Lattices are very familiar to logicians and those interested in Universal Algebra. But it takes some time to learn the special terminology and to become comfortable with the necessary examples. Indeed, without a stock of examples, it is impossible to have sufficient intuition for making the required constructions. True, some people took to the approach, and the lattice-theoretic definitions were simple enough to motivate. But a much greater percentage of people Scott came in contact with found the large number of things to learn a definite roadblock to understanding. And the Lattice Theory was only partly standard, since this approach to the theory has to employ complete lattices and topological notions in order to explain *limits* and *continuity* adequately. In fact, Topology of a rather mathematically simple set-theoretical kind could have been used as the whole foundation much as in Scott [1972], but that kind of mathematics seems even less attractive to computer scientists. Nevertheless, the lattice-theoretic approach has great consistency and coherence; it has been carried out in full detail in Gierz, *et al.* [1980], which also gives the topological connections. That book contains a large number of references to the mathematical literature to show the connections of the theory to many other topics. What we had to miss out there is a clear hook-up with computability theory, owing simply to a lack of space and time to be able to cover everything.

In Scott [1981], Scott tried out another, different presentation (which is also explained in Scott [1982].) However, Scott found that the use of *neighborhood systems* causes confusion in people not used to thinking in terms of sets of sets of sets of sets . . . , even though the set theory required is quite simple. This section tries out another plan for making the story easy and natural. The notion to be used we call an *information system*. This is a "static" notion appropriate to bodies of information about coherent groups of elements. The "dynamic" ideas enter in the ways different systems can be related and in the semantical definitions about meanings of programming language constructs. (For discussions of semantical definitions see Stoy [1977], Gordon [1979], and Tennent [1981].) Neighborhood systems are, in a precise sense, equivalent to information systems, but there seems to be an interesting trade-off between what properties of structures are *axiomatized* and what are *implicit* in the form of the structure. Perhaps, despite their simplicity, neighborhoods leave too much implicit, too much to be extracted by definition; information systems, on the other hand, do seem to be more flexible in doing several of the important constructions. It all comes down to just where one imposes the closure conditions on the structures. Information systems give the right mix of axioms *vs.* definitions.

Another word about Category Theory: it is particularly significant and important for the theory and for the whole area of semantics. But it must be approached with great caution, for the sheer number of definitions and axioms can try the most patient reader. It is especially necessary in discussing applications of abstract mathematical ideas to keep the motivation strongly in mind. This is often hard to do if the categories get too thick, but of course it all depends on the writer. Category Theory is especially useful in stating *general* properties of structures and in *characterizing* constructions uniquely; however, there often is a problem actually justifying the *existence* of certain constructions, and a direct approach can be quicker than quoting lots of theorems. But, man cannot live by construction alone: theorems have to be proved in order to get the proper value out of the work. Domain Theory must also be convenient for demonstrating the soundness of various proof rules for properties of recursively defined objects and recursively defined domains. Category Theory can be helpful here. A step in the right direction has been made in the LCF system (see Gordon-Milner-Wadsworth [1979]), which, however, does not take advantage of general Category Theory.

The main purpose of the Theory of Domains in Denotational Semantics is to give a mathematical model of a system of *types*—including function-space types—and to explain a notion of computability with respect to these types. There are many possible theories of types, but the construction of domains is meant to justify recursive definitions at all types, and—most essentially—to justify recursive definitions of types. Pursuing these goals has certain consequences, as we shall see. The model presented here is only one approach, and some comparisons with other methods will be made. Again some help from Category Theory would be welcome in comparing the different kinds of modelling.

One benefit of Domain Theory is that it is possible to make sense of types containing *infinite* elements. The cost required seems to be that the domains therefore have to contain *partial* elements as well as *total* elements. And this is where the lattice-theoretic definitions entered in the earlier presentations: the partial ordering with relations like $x \sqsubseteq y$ was used to express the fact that the element x was "less defined" (i.e. more partial) than y but "contained in" y. The relation $\sqsubseteq$, however, must be subjected to many axioms to have a theory suitable to the desired applications. Instead of such a big group of axioms, we put forward here a construction where the "skeleton" (or better: "backbone") of a domain is introduced by just a few axioms. Then the domain itself is defined as a certain construct from the backbone in order to define the appropriate notion of element. There are several advantages to this approach:

- Simple definitions of the basic concepts can be given.
- Detailed properties are proved as theorems rather than assumed as axioms.
- Emphasis can be given to the constructive nature of the definitions.
- Domains can be made more visible.
- The theory of domains is made more available for applications, because it is easier to produce the needed complex domains.

4.2 Information systems

Dependencies. Inside InformationSystems, each box is one subfolder, or one Lean file sitting directly in the folder. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

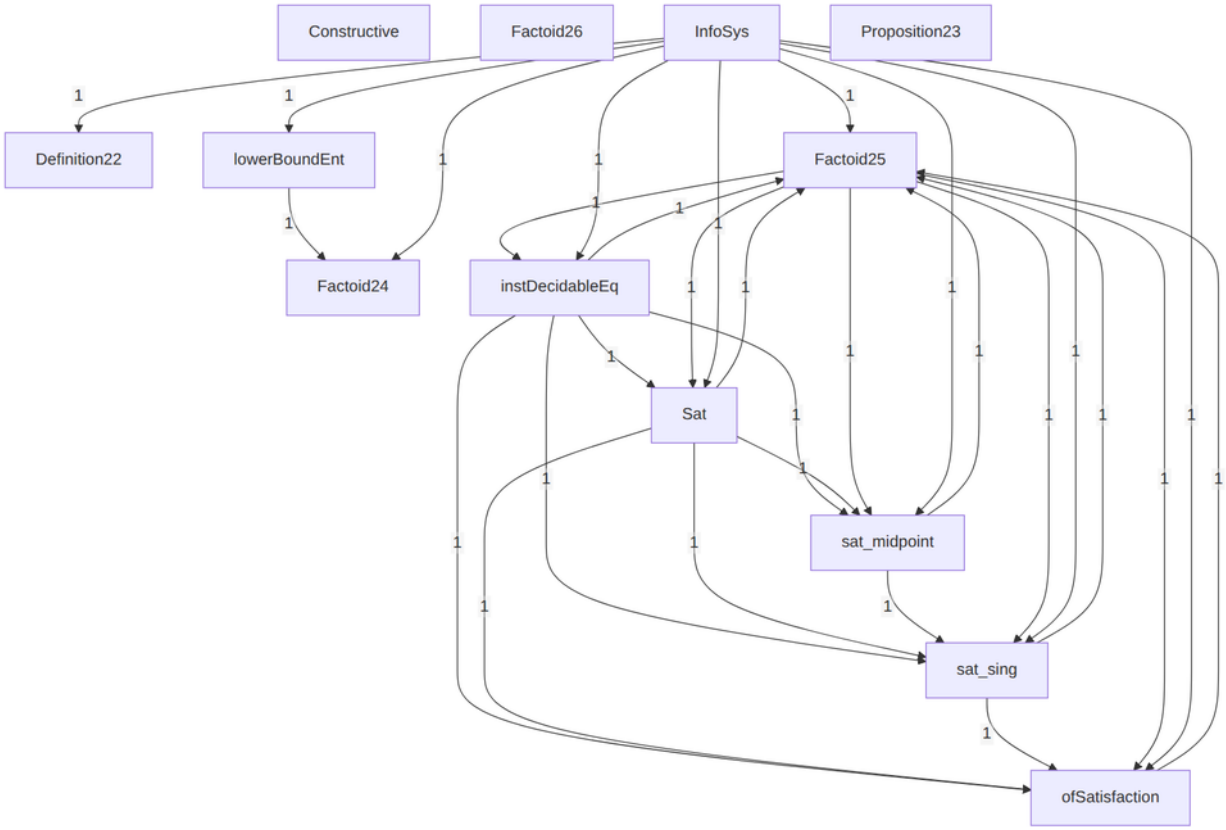

Figure 48: Information systems.

Intuitively, an information system is a set of "propositions" that can be made about "possible elements" of the desired domain. We will assume that sufficiently many propositions have been supplied to distinguish between distinct elements; as a consequence, an element can be constructed abstractly as the set of all the propositions that are true of it. Partial elements have "small" sets; while total elements have "large" sets (even: maximal). To make this somewhat rough idea precise, we have to explain—by a suitable, but small choice of axioms—how the collection of all propositions relevant to the domain hangs together, or better, is structured as a set of abstract propositions. Fortunately, the axioms for this structure are very simple and familiar, which is a great help in making up examples.

- Definition 2.1
- A first example
- A second example
- A third example
- Definition 2.2
- Proposition 2.3

So much for the definition of what an information system is as a mathematical structure. The next question is: What is it good for? More precisely, if information systems are the backbones of domains, then where are the elements? That is the topic of the next section.

insert_comm'.lean

```
module

public import Mathlib.Data.Finset.Basic

@[expose] public section

namespace DomainTheory.InformationSystems.Constructive

variable {α : Type*} [DecidableEq α]

theorem insert_comm' (a b : α) (s : Finset α) :
    insert a (insert b s) = insert b (insert a s) := by
  ext x
  simp only [Finset.mem_insert]
  constructor
  · rintro (h | h | h)
    exacts [Or.inr (Or.inl h), Or.inl h, Or.inr (Or.inr h)]
  · rintro (h | h | h)
    exacts [Or.inr (Or.inl h), Or.inl h, Or.inr (Or.inr h)]

end DomainTheory.InformationSystems.Constructive
```

instLeftCommutativeInsert.lean

```
module

public import Mathlib.Data.Finset.Basic
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    insert_comm'

@[expose] public section

namespace DomainTheory.InformationSystems.Constructive

variable {α : Type*} [DecidableEq α]

instance instLeftCommutativeInsert :
    LeftCommutative (insert : α → Finset α → Finset α) := ⟨insert_comm'⟩

end DomainTheory.InformationSystems.Constructive
```

funion.lean

```
module

public import Mathlib.Data.Finset.Basic
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    instLeftCommutativeInsert
```

```
@[expose] public section

namespace DomainTheory.InformationSystems.Constructive

variable {α : Type*} [DecidableEq α]

def funion (u v : Finset α) : Finset α := Multiset.foldr insert u v.1

end DomainTheory.InformationSystems.Constructive
```

notation5.lean

```
module

public import Mathlib.Data.Finset.Basic
public import DomainTheory.InformationSystems.InformationSystems.Constructive.funion

@[expose] public section

namespace DomainTheory.InformationSystems.Constructive

variable {α : Type*} [DecidableEq α]

@[inherit_doc] infixl:65 " ∪' " => funion

end DomainTheory.InformationSystems.Constructive
```

mem_foldr_insert.lean

```
module

public import Mathlib.Data.Finset.Basic
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    instLeftCommutativeInsert
public import DomainTheory.InformationSystems.InformationSystems.Constructive.Basic.
    notation5

@[expose] public section

namespace DomainTheory.InformationSystems.Constructive

variable {α : Type*} [DecidableEq α]

theorem mem_foldr_insert (a : α) (u : Finset α) (s : Multiset α) :
    a ∈ Multiset.foldr insert u s ↔ a ∈ u ∨ a ∈ s := by
  refine Multiset.induction_on s ?_ ?_
  · simp
  · intro b t ih
    simp only [Multiset.foldr_cons, Finset.mem_insert, ih, Multiset.mem_cons]
    constructor
    · rintro (h | h | h)
      exacts [Or.inr (Or.inl h), Or.inl h, Or.inr (Or.inr h)]
    · rintro (h | h | h)
      exacts [Or.inr (Or.inl h), Or.inl h, Or.inr (Or.inr h)]
```

```
end DomainTheory.InformationSystems.Constructive
```

mem_funion.lean

```
module

public import Mathlib.Data.Finset.Basic
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    instLeftCommutativeInsert
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    mem_foldr_insert
public import DomainTheory.InformationSystems.InformationSystems.Constructive.Basic.
    notation5

@[expose] public section

namespace DomainTheory.InformationSystems.Constructive

variable {α : Type*} [DecidableEq α]

@[simp] theorem mem_funion {a : α} {u v : Finset α} :
    a ∈ u ∪' v ↔ a ∈ u ∨ a ∈ v := mem_foldr_insert a u v.1

end DomainTheory.InformationSystems.Constructive
```

funion_empty_right.lean

```
module

public import Mathlib.Data.Finset.Basic
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    instLeftCommutativeInsert
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    mem_funion
public import DomainTheory.InformationSystems.InformationSystems.Constructive.Basic.
    notation5

@[expose] public section

namespace DomainTheory.InformationSystems.Constructive

variable {α : Type*} [DecidableEq α]

@[simp] theorem funion_empty_right (u : Finset α) : u ∪' (∅ : Finset α) = u := by
  ext x
  simp only [mem_funion, Finset.notMem_empty, or_false]

end DomainTheory.InformationSystems.Constructive
```

decidableEq_finset.lean

```
module
```

```
public import Mathlib.Data.Finset.Basic
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    instLeftCommutativeInsert
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    mem_funion
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    funion_empty_right
public import DomainTheory.InformationSystems.InformationSystems.Constructive.Basic.
    notation5

@[expose] public section

namespace DomainTheory.InformationSystems.Constructive

variable {α : Type*} [DecidableEq α]

omit [DecidableEq α] in

theorem decidableEq_finset.eq_of_subset (s t : Finset α) (h : s ⊆ t ∧ t ⊆ s) : s = t
    :=
  Finset.Subset.antisymm h.1 h.2

omit [DecidableEq α] in

theorem decidableEq_finset.false_of_ne (s t : Finset α) (h : ¬(s ⊆ t ∧ t ⊆ s)) (heq :
     s = t) :
    False := by
  subst heq
  exact h ⟨Finset.Subset.refl _, Finset.Subset.refl _⟩

def decidableEq_finset {α : Type*} [DecidableEq α] : DecidableEq (Finset α) :=
  fun s t =>
    if h : s ⊆ t ∧ t ⊆ s then
      isTrue (decidableEq_finset.eq_of_subset s t h)
    else
      isFalse (decidableEq_finset.false_of_ne s t h)

end DomainTheory.InformationSystems.Constructive
```

subset_funion_left.lean

```
module

public import Mathlib.Data.Finset.Basic
public import DomainTheory.InformationSystems.InformationSystems.Constructive.funion
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    decidableEq_finset
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    insert_comm'
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    instLeftCommutativeInsert
public import DomainTheory.InformationSystems.InformationSystems.Constructive.Basic.
    notation5
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    mem_foldr_insert
```

```
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    mem_funion
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    funion_empty_right

@[expose] public section

namespace DomainTheory.InformationSystems.Constructive

variable {α : Type*} [DecidableEq α]

theorem subset_funion_left (u v : Finset α) : u ⊆ u ∪' v := fun _ hx => mem_funion.2 (
    Or.inl hx)

end DomainTheory.InformationSystems.Constructive
```

coe_funion.lean

```
module

public import Mathlib.Data.Finset.Basic
public import DomainTheory.InformationSystems.InformationSystems.Constructive.funion
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    decidableEq_finset
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    insert_comm'
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    instLeftCommutativeInsert
public import DomainTheory.InformationSystems.InformationSystems.Constructive.Basic.
    notation5
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    mem_foldr_insert
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    mem_funion
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    funion_empty_right

@[expose] public section

namespace DomainTheory.InformationSystems.Constructive

variable {α : Type*} [DecidableEq α]

theorem coe_funion (u v : Finset α) :
    (↑(u ∪' v) : Set α) = (↑u : Set α) ∪ ↑v := by
  ext x
  simp only [Set.mem_union, Finset.mem_coe, mem_funion]

end DomainTheory.InformationSystems.Constructive
```

subset_funion_right.lean

```
module

public import Mathlib.Data.Finset.Basic
```

```
public import DomainTheory.InformationSystems.InformationSystems.Constructive.funion
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    decidableEq_finset
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    insert_comm'
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    instLeftCommutativeInsert
public import DomainTheory.InformationSystems.InformationSystems.Constructive.Basic.
    notation5
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    mem_foldr_insert
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    mem_funion
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    funion_empty_right

@[expose] public section

namespace DomainTheory.InformationSystems.Constructive

variable {α : Type*} [DecidableEq α]

theorem subset_funion_right (u v : Finset α) : v ⊆ u ∪' v := fun _ hx => mem_funion.2
    (Or.inr hx)

end DomainTheory.InformationSystems.Constructive
```

funion_subset_iff.lean

```
module

public import Mathlib.Data.Finset.Basic
public import DomainTheory.InformationSystems.InformationSystems.Constructive.funion
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    decidableEq_finset
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    insert_comm'
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    instLeftCommutativeInsert
public import DomainTheory.InformationSystems.InformationSystems.Constructive.Basic.
    notation5
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    mem_foldr_insert
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    mem_funion
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    funion_empty_right
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    subset_funion_left
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    subset_funion_right

@[expose] public section

namespace DomainTheory.InformationSystems.Constructive
```

```
variable {α : Type*} [DecidableEq α]

theorem funion_subset_iff {u v w : Finset α} : u ∪' v ⊆ w ↔ u ⊆ w ∧ v ⊆ w := by
  constructor
  · intro h
    exact ⟨fun x hx => h (subset_funion_left u v hx),
           fun x hx => h (subset_funion_right u v hx)⟩
  · rintro ⟨hu, hv⟩ x hx
    rcases mem_funion.1 hx with h | h
    exacts [hu h, hv h]

end DomainTheory.InformationSystems.Constructive
```

Constructive.lean

```
module

public import Mathlib.Data.Finset.Basic
public import DomainTheory.InformationSystems.InformationSystems.Constructive.funion
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    decidableEq_finset
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    insert_comm'
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    instLeftCommutativeInsert
public import DomainTheory.InformationSystems.InformationSystems.Constructive.Basic.
    notation5
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    mem_foldr_insert
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    mem_funion
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    funion_empty_right
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    coe_funion
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    subset_funion_left
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    subset_funion_right
public import DomainTheory.InformationSystems.InformationSystems.Constructive.
    funion_subset_iff

@[expose] public section
```

consistent_empty.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Basic

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
namespace Factoid26

theorem consistent_empty {A B : Type*} :
    Consistent (∅ : Finset (Token A B)) := by
  intro _a _b _b' hb _
  exact False.elim (Finset.notMem_empty _ hb)

end Factoid26
end DomainTheory.InformationSystems
```

Factoid26.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Factoid26.
    consistent_empty

@[expose] public section

namespace DomainTheory.InformationSystems.Factoid26

set_option linter.unusedVariables false

theorem theorem_26.{u_1, u_2} : ∀ {A : Type u_1} {B : Type u_2},
  @DomainTheory.InformationSystems.Factoid26.Consistent A B
    (@EmptyCollection.emptyCollection (Finset (DomainTheory.InformationSystems.
    Factoid26.Token A B))
      (@Finset.instEmptyCollection (DomainTheory.InformationSystems.Factoid26.Token A
    B))) :=
  @DomainTheory.InformationSystems.Factoid26.consistent_empty

end DomainTheory.InformationSystems.Factoid26
```

4.3 The elements of a system

Dependencies. Inside ElementsOfASystem, each box is one subfolder, or one Lean file sitting directly in the folder. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.



Figure 49: The elements of a system.

Let $\mathbf{A}$ be an information system, and suppose we already had a concept of being an element of $\mathbf{A}$. The data objects are meant to be propositions about elements, so if X is in $D_{\mathbf{A}}$ and if x is an element, then we can be expected to know what it means to say that X is true of x. Since all we are given is the set of data objects $D_{\mathbf{A}}$, we have to assume that it contains enough objects to distinguish between distinct elements.

(If there were not enough of them, we would have to change the set $D_{\mathbf{A}}$.) Formally, we can write of two elements x and y:

$$x = y \quad \text{iff all } X \in D_{\mathbf{A}} \text{ which are true of } x \text{ are also true of } y, \text{ and conversely.}$$

If this principle is accepted, then the elements can be *identified* with the sets of propositions true of them; formally we can assert:

$$x = \{X \in D_{\mathbf{A}} \mid X \text{ is true of } x\}.$$

There can be no confusion injected here in identifying elements that ought to be distinct, since we are assuming that there are enough data objects in the system. If for some reason we felt we ought to have more of them to distinguish between more elements, then we would have to pass to a larger and *different* information system. By agreement, then, the above equation is a tautology. So, for the sake of simplicity, elements can be taken to be *sets* of data objects. But, we hasten to ask, which sets? The question is really: What are the properties of truth? The answers are well known, and, in fact, we have already used them in our examples in the last section. In words, the set of true propositions about a possible element must be (i) consistent in itself, and (ii) closed under entailment (or *deductively closed*, for short). Condition (i) is clear because we are talking about a *possible* element, not an impossible one. Condition (ii) is acceptable, because, by the very meaning of the word, entailment should be truth preserving. In addition, we are also saying the converse: *any* set having properties (i) and (ii) corresponds to a (partial) element. Here is the formal statement:

- Definition 3.1

IsTotal.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def IsTotal (x : sys.Element) : Prop := ∀ y, x ≤ y → y ≤ x

end InfoSys

end DomainTheory.InformationSystems
```

AllConsistent.lean

```
module
```

```
public import DomainTheory.InformationSystems.InformationSystems.InfoSys

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def AllConsistent : Prop := ∀ u : Finset α, u ∈ sys.Con

end InfoSys

end DomainTheory.InformationSystems
```

topElement.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    AllConsistent

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def topElement (h : sys.AllConsistent) : sys.Element where
  carrier := Set.univ
  consistent := fun Y _ => h Y
  closed := fun _ _ _ _ => trivial

end InfoSys

end DomainTheory.InformationSystems
```

exists_top_iff_allConsistent.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.IsTotal
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    AllConsistent
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.topElement

@[expose] public section
```

```
namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem exists_top_iff_allConsistent :
    (∃ x : sys.Element, x.carrier = Set.univ) ↔ sys.AllConsistent := by
  constructor
  · intro ⟨x, hx⟩ u
    exact x.consistent u (hx ▸ Set.subset_univ _)
  · intro h
    exact ⟨sys.topElement h, rfl⟩

end InfoSys
end DomainTheory.InformationSystems
```

eq_of_carrier_univ_of_isTotal.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.IsTotal
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    AllConsistent
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.topElement

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem eq_of_carrier_univ_of_isTotal {x t : sys.Element}
    (hx : x.carrier = Set.univ) (ht : sys.IsTotal t) : t = x :=
  le_antisymm (fun _ _ => hx ▸ trivial) (ht x (fun _ _ => hx ▸ trivial))

end InfoSys
end DomainTheory.InformationSystems
```

Factoid34.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    exists_top_iff_allConsistent

@[expose] public section

namespace DomainTheory.InformationSystems.InfoSys

set_option linter.unusedVariables false
```

```
theorem theorem_34.{u_1} : ∀ {α : Type u_1} [inst : DecidableEq α] (sys :
    @DomainTheory.InformationSystems.InfoSys α inst),
  Iff
    (∃ (x : @DomainTheory.InformationSystems.InfoSys.Element α inst sys),
      @Eq (Set α) (@DomainTheory.InformationSystems.InfoSys.Element.carrier α inst sys
     x) (@Set.univ α))
    (@DomainTheory.InformationSystems.InfoSys.AllConsistent α inst sys) :=
  @DomainTheory.InformationSystems.InfoSys.exists_top_iff_allConsistent

end DomainTheory.InformationSystems.InfoSys
```

funion_insert.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Definition22

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem funion_insert (u : Finset α) (a : α) (t : Finset α) :
    u ∪' insert a t = insert a (u ∪' t) := by
  ext x
  constructor
  · intro hx
    rcases mem_funion.mp hx with hu | hins
    · exact Finset.mem_insert_of_mem (mem_funion.mpr (Or.inl hu))
    · rcases Finset.mem_insert.mp hins with ha | ht
      · exact Finset.mem_insert.mpr (Or.inl ha)
      · exact Finset.mem_insert_of_mem (mem_funion.mpr (Or.inr ht))
  · intro hx
    rcases Finset.mem_insert.mp hx with ha | h
    · exact mem_funion.mpr (Or.inr (Finset.mem_insert.mpr (Or.inl ha)))
    · rcases mem_funion.mp h with hu | ht
      · exact mem_funion.mpr (Or.inl hu)
      · exact mem_funion.mpr (Or.inr (Finset.mem_insert.mpr (Or.inr ht)))

end InfoSys
end DomainTheory.InformationSystems
```

proposition_2_3_ii.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Definition22
```

```
public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    funion_insert

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem proposition_2_3_ii {u v : Finset α} (hu : u ∈ sys.Con) (h : sys.EntSet u v) :
    u ∪' v ∈ sys.Con := by
  have : ∀ s : Finset α, (∀ x ∈ s, x ∈ v) → u ∪' s ∈ sys.Con := by
    intro s
    refine Finset.induction_on s ?_ ?_
    · intro _

      simpa [funion_empty_right] using hu
    · intro a t _ha ih hmem
      have hEnt_u_a : sys.Ent u a := h a (hmem a (Finset.mem_insert_self a t))
      have hut : u ∪' t ∈ sys.Con := ih fun x hx => hmem x (Finset.mem_insert_of_mem
    hx)
      have hEnt : sys.Ent (u ∪' t) a :=
        sys.ent_trans hut hu (fun y hy => sys.ent_refl hut (subset_funion_left u t hy)
    )
          hEnt_u_a
      have hins : insert a (u ∪' t) ∈ sys.Con := sys.ent_con hEnt
      simpa [funion_insert] using hins
  exact this v fun _ hx => hx

end InfoSys
end DomainTheory.InformationSystems
```

InfoSys.lean

```
module

public import Mathlib.Data.Finset.Basic
public import Mathlib.Data.Set.Basic

@[expose] public section

universe u

namespace DomainTheory.InformationSystems

structure InfoSys (α : Type u) [DecidableEq α] where

  bot : α

  Con : Set (Finset α)
```

```
  Ent : Finset α → α → Prop

  con_subset : ∀ {u v : Finset α}, u ∈ Con → v ⊆ u → v ∈ Con

  con_sing : ∀ a : α, {a} ∈ Con

  ent_con : ∀ {u : Finset α} {a : α}, Ent u a → insert a u ∈ Con

  ent_bot : ∀ {u : Finset α}, u ∈ Con → Ent u bot

  ent_refl : ∀ {u : Finset α} {a : α}, u ∈ Con → a ∈ u → Ent u a

  ent_trans : ∀ {u v : Finset α} {c : α},
    v ∈ Con → u ∈ Con → (∀ y ∈ u, Ent v y) → Ent u c → Ent v c

end DomainTheory.InformationSystems
```

Element.lean

```
module

public import Mathlib.Data.Finset.Basic
public import Mathlib.Data.Set.Basic
public import DomainTheory.InformationSystems.InformationSystems.InfoSys.InfoSys

@[expose] public section

universe u

namespace DomainTheory.InformationSystems
namespace InfoSys

variable {α : Type u} [DecidableEq α] (sys : InfoSys α)

structure Element where

  carrier : Set α

  consistent : ∀ Y : Finset α, (Y : Set α) ⊆ carrier → Y ∈ sys.Con

  closed : ∀ (Y : Finset α) (a : α), (Y : Set α) ⊆ carrier → sys.Ent Y a → a ∈
    carrier

end InfoSys
end DomainTheory.InformationSystems
```

Basic.lean

```
module

public import Mathlib.Data.Finset.Basic
public import Mathlib.Data.Set.Basic
public import DomainTheory.InformationSystems.InformationSystems.InfoSys.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.InfoSys.Element
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

universe u

namespace InfoSys

variable {α : Type u} [DecidableEq α] (sys : InfoSys α)

theorem Element.ext {x y : sys.Element} (h : x.carrier = y.carrier) : x = y := by
  cases x
  cases y
  subst h
  rfl

theorem element_le_refl (x : sys.Element) : x.carrier ⊆ x.carrier :=
  Set.Subset.refl _

theorem element_le_trans (x y z : sys.Element)
    (hxy : x.carrier ⊆ y.carrier) (hyz : y.carrier ⊆ z.carrier) :
    x.carrier ⊆ z.carrier :=
  Set.Subset.trans hxy hyz

theorem element_le_antisymm (x y : sys.Element)
    (hxy : x.carrier ⊆ y.carrier) (hyx : y.carrier ⊆ x.carrier) :
    x = y :=
  Element.ext sys (Set.Subset.antisymm hxy hyx)

instance instPartialOrderElement : PartialOrder sys.Element where
  le x y := x.carrier ⊆ y.carrier
  le_refl := element_le_refl sys
  le_trans := element_le_trans sys
  le_antisymm := element_le_antisymm sys
end InfoSys
end DomainTheory.InformationSystems
```

EntSet.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

universe u

variable {α : Type u} [DecidableEq α] (sys : InfoSys α)

def EntSet (u v : Finset α) : Prop := ∀ X ∈ v, sys.Ent u X
```

```
end InfoSys

end DomainTheory.InformationSystems
```

entSet_singleton.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Definition22.EntSet

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

universe u

variable {α : Type u} [DecidableEq α] (sys : InfoSys α)

theorem entSet_singleton {u : Finset α} {X : α} :
    sys.EntSet u {X} ↔ sys.Ent u X := by
  constructor
  · intro h
    exact h X (Finset.mem_singleton_self X)
  · intro h Y hY
    rw [Finset.mem_singleton] at hY
    subst hY
    exact h

end InfoSys
end DomainTheory.InformationSystems
```

entSet_empty.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Definition22.EntSet

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

universe u

variable {α : Type u} [DecidableEq α] (sys : InfoSys α)

theorem entSet_empty (u : Finset α) : sys.EntSet u (∅ : Finset α) := by
  intro X hX
  exact False.elim (Finset.notMem_empty X hX)
```

```
end InfoSys
end DomainTheory.InformationSystems
```

Token.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys

@[expose] public section

namespace DomainTheory.InformationSystems

namespace Factoid26

inductive Token (A B : Type*) where
  | bot
  | pair (a : A) (b : B)
  deriving DecidableEq

end Factoid26
end DomainTheory.InformationSystems
```

Consistent.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Token

@[expose] public section

namespace DomainTheory.InformationSystems

namespace Factoid26

def Consistent {A B : Type*} (u : Finset (Token A B)) : Prop :=
  ∀ {{a : A}} {{b b' : B}},
    Token.pair a b ∈ u → Token.pair a b' ∈ u → b = b'

end Factoid26

end DomainTheory.InformationSystems
```

consistent_insert_bot.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Token
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Consistent

@[expose] public section
```

```
namespace DomainTheory.InformationSystems

namespace Factoid26

theorem consistent_insert_bot {A B : Type*} [DecidableEq A] [DecidableEq B]
    {u : Finset (Token A B)} (hu : Consistent u) :
    Consistent (insert (Token.bot : Token A B) u) := by
  intro a b b' hb hb'
  have hb1 : Token.pair a b ∈ u := by
    rcases Finset.mem_insert.mp hb with h | h
    · cases h
    · exact h
  have hb2 : Token.pair a b' ∈ u := by
    rcases Finset.mem_insert.mp hb' with h | h
    · cases h
    · exact h
  exact hu hb1 hb2

end Factoid26

end DomainTheory.InformationSystems
```

consistent_insert_mem.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Token
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Consistent

@[expose] public section

namespace DomainTheory.InformationSystems

namespace Factoid26

theorem consistent_insert_mem {A B : Type*} [DecidableEq A] [DecidableEq B]
    {u : Finset (Token A B)} {t : Token A B}
    (ht : t ∈ u) (hu : Consistent u) : Consistent (insert t u) := by
  simpa [Finset.insert_eq_of_mem ht] using hu

end Factoid26

end DomainTheory.InformationSystems
```

Ent.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Token
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Consistent

@[expose] public section
```

```
namespace DomainTheory.InformationSystems

namespace Factoid26

def Ent {A B : Type*} (u : Finset (Token A B)) (X : Token A B) : Prop :=
  Consistent u ∧ (X = Token.bot ∨ X ∈ u)

end Factoid26

end DomainTheory.InformationSystems
```

consistent_subset.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Token
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Consistent

@[expose] public section

namespace DomainTheory.InformationSystems

namespace Factoid26

theorem consistent_subset {A B : Type*} {u v : Finset (Token A B)} (huv : v ⊆ u)
    (hu : Consistent u) : Consistent v :=
  fun _a _b _b' hb hb' => hu (huv hb) (huv hb')

end Factoid26

end DomainTheory.InformationSystems
```

consistent_singleton.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Token
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Consistent

@[expose] public section

namespace DomainTheory.InformationSystems

namespace Factoid26

theorem consistent_singleton {A B : Type*} [DecidableEq A] [DecidableEq B]
    (t : Token A B) : Consistent ({t} : Finset (Token A B)) := by
  intro a b b' hb hb'
  rw [Finset.mem_singleton] at hb hb'

  cases t with
  | bot =>
    cases hb
```

```
  | pair a0 b0 =>
    cases hb
    cases hb'
    rfl

end Factoid26

end DomainTheory.InformationSystems
```

partialFunctionSystem.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Token
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Consistent
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.
    consistent_singleton
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.
    consistent_subset
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.
    consistent_insert_bot
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.
    consistent_insert_mem
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Ent

@[expose] public section

namespace DomainTheory.InformationSystems

namespace Factoid26

def partialFunctionSystem (A B : Type*) [DecidableEq A] [DecidableEq B] :
    InfoSys (Token A B) where
  bot := Token.bot
  Con := {u | Consistent u}
  Ent := Ent
  con_subset := by
    intro u v hu hv
    exact consistent_subset hv hu
  con_sing := fun t => consistent_singleton t
  ent_con := by
    rintro u a ⟨hu, hX⟩
    rcases hX with rfl | hmem
    · exact consistent_insert_bot hu
    · exact consistent_insert_mem hmem hu
  ent_bot := by
    intro u hu
    exact ⟨hu, Or.inl rfl⟩
  ent_refl := by
    intro u a hu ha
    exact ⟨hu, Or.inr ha⟩
  ent_trans := by
    intro u v c hv _hu hvu ⟨_, hc⟩
    refine ⟨hv, ?_⟩
```

```
    rcases hc with rfl | hc
    · exact Or.inl rfl
    · have ⟨_, hcv⟩ := hvu c hc
      exact hcv

end Factoid26

end DomainTheory.InformationSystems
```

le_topElement.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.IsTotal
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    AllConsistent
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.topElement

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem le_topElement (h : sys.AllConsistent) (x : sys.Element) :
    x ≤ sys.topElement h := fun _ _ => trivial

end InfoSys
end DomainTheory.InformationSystems
```

topElement_isTotal.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.IsTotal
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    AllConsistent
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.topElement
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    le_topElement

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)
```

```
theorem topElement_isTotal (h : sys.AllConsistent) :
    sys.IsTotal (sys.topElement h) := fun y _ => sys.le_topElement h y

end InfoSys
end DomainTheory.InformationSystems
```

proposition_2_3_i.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Definition22

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem proposition_2_3_i : sys.EntSet ∅ ({sys.bot} : Finset α) := by
  intro X hX
  rw [Finset.mem_singleton] at hX
  subst hX
  exact sys.ent_bot sys.con_empty

end InfoSys
end DomainTheory.InformationSystems
```

isTotal_of_carrier_univ.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.IsTotal
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    AllConsistent
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.topElement

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem isTotal_of_carrier_univ {x : sys.Element} (hx : x.carrier = Set.univ) :
    sys.IsTotal x := fun _ _ _ _ => hx ▸ trivial

end InfoSys
```

```
end DomainTheory.InformationSystems
```

eq_topElement_of_isTotal.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.IsTotal
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    AllConsistent
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.topElement
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    le_topElement

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem eq_topElement_of_isTotal (h : sys.AllConsistent) {x : sys.Element}
    (hx : sys.IsTotal x) : x = sys.topElement h :=
  le_antisymm (sys.le_topElement h x) (hx _ (sys.le_topElement h x))

end InfoSys
end DomainTheory.InformationSystems
```

isTotal_iff_eq_topElement.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.IsTotal
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    AllConsistent
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.topElement
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    topElement_isTotal
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    eq_topElement_of_isTotal

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem isTotal_iff_eq_topElement (h : sys.AllConsistent) {x : sys.Element} :
    sys.IsTotal x ↔ x = sys.topElement h :=
```

```
  ⟨sys.eq_topElement_of_isTotal h, fun hx => hx ▶ sys.topElement_isTotal h⟩

end InfoSys
end DomainTheory.InformationSystems
```

exists_unique_total_of_allConsistent.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.IsTotal
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    AllConsistent
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.topElement
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    topElement_isTotal
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid34.
    eq_topElement_of_isTotal

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem exists_unique_total_of_allConsistent (h : sys.AllConsistent) :
    ∃! x : sys.Element, sys.IsTotal x :=
  ⟨sys.topElement h, ⟨sys.topElement_isTotal h, fun _ hy =>
    sys.eq_topElement_of_isTotal h hy⟩⟩

end InfoSys
end DomainTheory.InformationSystems
```

con_empty.lean

```
module

public import Mathlib.Data.Finset.Basic
public import Mathlib.Data.Set.Basic
public import DomainTheory.InformationSystems.InformationSystems.InfoSys.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

universe u

namespace InfoSys

variable {α : Type u} [DecidableEq α] (sys : InfoSys α)

theorem con_empty : (∅ : Finset α) ∈ sys.Con :=
```

```
  sys.con_subset (sys.con_sing sys.bot) (Finset.empty_subset _)

end InfoSys
end DomainTheory.InformationSystems
```

InfoSys.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys.Basic
public import DomainTheory.InformationSystems.InformationSystems.InfoSys.con_empty

@[expose] public section
```

Basic.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys

public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Token
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Consistent
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.Ent
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.
    partialFunctionSystem
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.
    consistent_singleton
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.
    consistent_subset
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.
    consistent_insert_bot
public import DomainTheory.InformationSystems.InformationSystems.Factoid26.
    consistent_insert_mem

@[expose] public section

namespace DomainTheory.InformationSystems

namespace Factoid26

example : InfoSys (Token ℕ Bool) := partialFunctionSystem ℕ Bool
end Factoid26
end DomainTheory.InformationSystems
```

Definition22.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Definition22.EntSet
public import DomainTheory.InformationSystems.InformationSystems.Definition22.
    entSet_empty
public import DomainTheory.InformationSystems.InformationSystems.Definition22.
    entSet_singleton
```

```
@[expose] public section
```

4.4 Domains as lattices and as topological spaces

Dependencies. Inside DomainsAsLatticesAndAsTopologicalSpaces, each box is one subfolder, or one Lean file sitting directly in the folder. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

Figure 50: Domains as lattices and as topological spaces.

I will attempt to keep this section as informal as possible—especially as Sections 2 and 3 were quite formal (i.e. mathematical) enough. The main purpose of the discussion of this section is to relate the new presentation of the Theory of Domains to previously published ones. (Some alternatives are discussed at the end of the paper.)

Lattice-theoretic considerations. Let $\mathbf{A}$ be an information system. Because the elements of $|\mathbf{A}|$ are introduced as sets, these elements can be given structure from what we know already about ordinary sets. For instance, the set-theoretic inclusion relation between sets can certainly be applied to elements. The question is: What does $x \subseteq y$ mean intuitively? In fact, we have already mentioned this relationship before. It means that every proposition (among the ones given by the information system) true of x is also true of y (though not necessarily conversely). In other words, x is perhaps only partially determined, while y is more fully determined in a way that includes everything true of x. Clearly, then, if we grant the interest of partial elements, then this relation is a natural and basic one. We often read "$x \subseteq y$" as "x approximates y".

Now here is one of the main points of the new exposition: Because $x \subseteq y$ is *defined* in terms of a familiar mathematical notion, then as a relation between elements it inherits all the well-known properties of the set-theoretical relation. It should not be necessary to write them out, for everyone who can read this far knows that $\subseteq$ is in particular reflexive and transitive. We say that the domain $|\mathbf{A}|$ is a *partially ordered set under inclusion*. We note that this (trivial) result is *proved* from the definition rather than assumed as an axiom.

Let us try out another notion. Elements are consistent, deductively closed sets of data objects. Right? Every subset of a consistent set is consistent, but not every subset is closed under entailment, in general. Right? But suppose that x and y are two elements. It can easily be seen that their intersection $x \cap y$ is again consistent and deductively closed (by a 2 nanosecond proof). Therefore, the set of elements of a domain is closed under intersection. This means that, as a partially ordered set, $|\mathbf{A}|$ is an *inf semilattice*.

Well, the exact terminology is quite unimportant, but the properties of $\cap$ when combined with the properties of $\subseteq$ are pleasantly "algebraic" (and run to several lines when written out). We all know them: $\cap$ is idempotent, commutative, and associative. The element $\bot$, being the The element $\bot$, being the smallest element of the domain, is a zero element for $\cap$. The operation $\cap$ is monotonic with respect to $\subseteq$, and we have the connection:

$$x \subseteq y \text{ iff } x \cap y = x.$$

What has just been alluded to in words is the standard mathematical axiomatization of the properties of an infimum (or meet) operation in a partially ordered set. (Remember, however, to have an operation well defined within a set it is necessary also to have closure under that operation.)

What about infs of subsets? No problem. For any *non-empty* subfamily of $|\mathbf{A}|$, it is just as easy to prove that the set-theoretical intersection of all the elements in the subfamily is again an element of the domain. This makes $|\mathbf{A}|$ a (conditionally) complete inf semilattice. Even if you do not have any idea what I am talking about, it does not matter because the properties of the domain are built in by the very definition; you do not have to worry *at the start* about their formulation, for you can prove them when you need them (if ever).

What about suprema (or sups or joins)? Here there is a slight problem, because in the way we set things up they *do not* always have to exist. Consider what happens with just two elements x and y. The set-theoretical union of the two elements as subsets of $D_{\mathbf{A}}$ need be neither consistent nor deductively closed; and even if $x \cup y$ is consistent, it need not be closed under entailment. So if we want sups *within* $|\mathbf{A}|$, we cannot get by as cheaply as we can with a domain of arbitrary sets for which the simple union is the answer.

Let us write the sup (supposing it exists in $|\mathbf{A}|$) as $x \sqcup y$. What do we have when we actually have it? By the lore of partially ordered sets, $x \sqcup y$ must be the *least element* in $|\mathbf{A}|$ which includes (in the sense of $\subseteq$) both x and y. Now we have just spoken about infs of families of elements: they exist if the family is non-empty. This indicates that $x \sqcup y$ exists exactly when there is at least one element z in $|\mathbf{A}|$ such that $x \subseteq z$ and $y \subseteq z$. This turns out to be a way to say—entirely inside $|\mathbf{A}|$—that $x \cup y$ is consistent. In other words (and more generally) a sup of a subfamily exists if, and only if, the union of the family is consistent. (And in that case the sup is just the deductive closure of the union—that is, it is generally larger than the simple set-theoretical union.) This has an axiomatic version, but it is slightly complicated by the fact that sups do not always exist. In case $\top_{\mathbf{A}}$ exists, then we always have all the sups, and $|\mathbf{A}|$ is a *complete lattice*. (This is discussed in full axiomatic splendor in Gierz, et al. [1980].) But, let it hasten to be added, not every complete lattice is isomorphic to a domain. The lattices that correspond to domains are the so-called *algebraic lattices*. (See the discussion loc. cit. for the additional axiomatics required.) When the top is missing, the partially ordered structures corresponding to domains are called *conditionally complete, algebraic cpo's*.

There is, however, an important case in $|\mathbf{A}|$ where the union is consistent and is, in fact, the sup in the domain. Suppose we have a sequence of elements such that

$$x_0 \subseteq x_1 \subseteq x_2 \subseteq \cdots \subseteq x_n \subseteq x_{n+1} \subseteq \cdots$$

As n increases, we can say that the elements x_n are getting "better and better"; thus, they must be approaching something even more desirable *in the limit*. Let

$$y = \bigcup_{n=0}^{\infty} x_n,$$

then there is no question that y is a subset of $D_{\mathbf{A}}$. But is it an element? Consistency, recall, means that every *finite* subset is in $\mathrm{Con}_{\mathbf{A}}$. The trick is that a finite subset of y must be a subset of one of the x_n, because the sequence of elements x_n is increasing. But all the terms of our given sequence are elements, and so, consistent; therefore, every finite subset of y is consistent.

The same argument also shows that the set y of data objects is closed under entailment, because $\vdash_{\mathbf{A}}$ is defined as a relation between finite (consistent) sets and data objects. It follows that since each x_n is a set closed under $\vdash_{\mathbf{A}}$, then so is y. In other words, y is indeed an element. Otherwise said, the domain $|\mathbf{A}|$ is closed under the formation of unions of increasing chains of elements, and the union is, of course, the sup

in the sense of the partial ordering. Again we have proved closure rather than assuming it, and the necessary properties of the sup follow from its definition as a union.

This last argument can be generalized—as is well known to mathematicians—to the case of *directed* families of elements. The word "directed," or better "upward-directed," means that every finite number of elements in the family is included in some further element of the family; chains always have this property. A good example of the use of directed sets of elements figures in the discussion of the *finite elements* of the domain.

As we have remarked several times, any consistent set of data objects *generates* an element by closing it up under the entailment relation; thus, in particular, any set $u \in \mathrm{Con}$ generates an element. Let us write

$$\overline{u} = \{X \in D_{\mathbf{A}} \mid u \vdash_{\mathbf{A}} X\}$$

for the *closure* of u under entailment. (This notation could be used for any consistent subset of $D_{\mathbf{A}}$, but the case of finitely generated elements is especially important.) Such a $\overline{u}$ is always an element of $|\mathbf{A}|$; the totality of such elements form, by definition, the *finite elements* of the domain. The notation $\overline{u}$ should of course be decorated with a subscript $\mathbf{A}$, but, as there is no good place to write it in, we leave it out.

We have for all elements x of the domain the basic formula:

$$x = \bigcup \{\overline{u} \mid u \in \mathrm{Con}_{\mathbf{A}} \text{ and } u \subseteq x\}.$$

This can be read intuitively as saying that every element of the domain is the *limit* of its *finite approximations*. And, having used the word "limit" so often, we ought now to say something about how to make the meaning of this word correct mathematically. Note that in the limit representation for x, the union is a directed one. (Why?)

Topological considerations. Geometrically speaking, a topological space is a collection of "points" which group themselves in various "neighborhoods" providing thereby a sense of "nearness." More specifically, a neighborhood of a point in a *metric space* consists of all those points within a certain positive "distance" from the given point; that is, nearness is limited, but it is not pushed to *zero*. The major reason for leaving some "breathing space" around the point comes out in defining continuity of functions.

A function f from one topological space to another is said to be *continuous* provided that, for every point x of the first space, and for every neighborhood in the second space around $f(x)$, it is possible to find—in the first space—a neighborhood around x with the following property. If the function is restricted to this neighborhood, then its values lie entirely in the given neighborhood around $f(x)$. In the metric case we can say that if we do not want the function to wander any great distance from $f(x)$, then there is a restricted distance around x giving a neighborhood over which the function values stay as close to $f(x)$ as specified. This keeps the function from jumping around wildly, since small variations in x lead to only small variations in $f(x)$.

The intuition about continuity is no doubt very clear in the more geometric examples, and geometric intuition can carry us quite far. But the spaces obtained from domain theory are not really geometric spaces, so we need to make some shifts in our metaphors. The geometric notion of a point usually implies that two points are perfectly distinguishable: if x and y are different, then they have disjoint neighborhoods. This is certainly true in the metric case, where, if two points are different, then they are at a positive distance apart. Early on in the study of topological spaces, however, it was found that not all spaces were metric, and weaker separation properties of pairs of distinct points were uncovered. One of the very weak versions of such a condition is called the "T_0-axiom." The best way to put it is that if two points have the same neighborhoods, then they are the same. The contrapositive statement sounds odd: if two points are distinct,

then there is a neighborhood that contains one but not the other. The oddity of this statement lies in the feeling that you cannot make up your mind over which is the better point.

In our domains there is already a notion of "betterness" which proves to be very closely related to the implicit neighborhood structure. The reason why our domains, as spaces of points, are not "geometric" in the familiar sense is that they contain partial elements. A geometric point, on the other hand, is "perfect" or totally determined; it cannot be made better than it already is. The metric in common spaces is measuring something other than betterness, for there are competing notions of approximation afoot here. Thus, we must keep our special goals in defining domains clearly in mind to avoid confusion.

Consider an information system $\mathbf{A}$. For each $u \in \mathrm{Con}_{\mathbf{A}}$, we define a corresponding neighborhood of $|\mathbf{A}|$ by the equation:

$$[u]_{\mathbf{A}} = \{x \in |\mathbf{A}| \mid u \subseteq x\}.$$

The neighborhoods of an element x are all those sets $[u]_{\mathbf{A}}$, where $u \subseteq x$. Note that this is the same as saying $\overline{u} \subseteq x$ or $\overline{u}$ approximates x. Indeed, the neighborhoods are in a one-one correspondence with the finite elements of $|\mathbf{A}|$. A neighborhood collects together all those elements sharing the same finite amount of information.

If both $u \subseteq x$ and $v \subseteq x$, then it is easy to see that the intersection of the two neighborhoods is again a neighborhood of x by virtue of the formula:

$$[u]_{\mathbf{A}} \cap [v]_{\mathbf{A}} = [u \cup v]_{\mathbf{A}}.$$

In case u and v are inconsistent with each other, then the intersection will be the empty set $\emptyset$. Because every element of our domain $|\mathbf{A}|$ is the union of the finite elements it contains, it is trivial to prove that two elements with exactly the same neighborhoods are the same. For these reasons, then, it follows that $|\mathbf{A}|$ is a T_0-topological space. The immediate reaction to this intelligence is: So what?

The answer to this scepticism will appear in the best light when we discuss in the next section the notion of function or mapping appropriate to our domains. The argument will be based on the extremely elementary form of the definition that characterizes the general continuous function together with the fact that the geometric intuition is suggestive of theorems to prove. In Section 6 we will find that the space of all continuous functions between two given domains is also a domain, a most useful result that is interesting topologically. But further interest for Domain Theory comes from the circumstance that there is a connection between geometry and domains. We cannot go into the full details here, but I can make some brief remarks.

Before continuing that discussion, though, it should be remarked that once the topology of the domain has been uncovered, then the unions of chains of elements (or directed sets of elements) are topological limits according to accepted general definitions. Thus, what we felt intuitively was a limiting process (the getting better and better up to the union) is in fact a limit formation in a precise mathematical sense. This helps convince us that we are on the right track.

Total elements as a space. In any domain it can be proved that any element x can be extended to a *total element* t, which is characterized by the property that it is a *maximal* element of the partial ordering. (Perhaps there are many such t, but there is always at least one with $x \subseteq t$.) Recall that the set of all total elements of $|\mathbf{A}|$ is denoted by $\mathrm{Tot}_{\mathbf{A}}$. Because the set $\mathrm{Tot}_{\mathbf{A}} \subseteq |\mathbf{A}|$, it is a topological space itself. Suppose s and t are two distinct total elements, then they must be inconsistent with each other—but we shall prove more. If every finite consistent $u \subseteq s$ also satisfied $u \subseteq t$, then $s \subseteq t$ would follow. But this is impossible, because s is maximal. Let, then, $u \in \mathrm{Con}_{\mathbf{A}}$ with $u \subseteq s$ be chosen so that $u \subseteq t$ fails. Now u must be inconsistent with t, since otherwise there would be an element containing them both. It follows that u must

be inconsistent with some $v \in \mathrm{Con}_{\mathbf{A}}$ with $v \subseteq t$. In this way we show that the neighborhoods $[u]_{\mathbf{A}}$ and $[v]_{\mathbf{A}}$ are disjoint.

This argument proves that $\mathrm{Tot}_{\mathbf{A}}$ is a *Hausdorff space* (or T_2-space). We cannot go further into the details here, but it is also a totally disconnected, compact Hausdorff space. (These spaces—well known from studies of Logic and the Theory of Boolean Algebras—are also zero-dimensional.) Assuming the countability of $\mathrm{Con}_{\mathbf{A}}$, which is not such a bold assumption, all such spaces can be conveniently embedded into the real line so as to preserve the topological structure. Perhaps this does not seem so surprising, but it shows that the topological nature of $\mathrm{Tot}_{\mathbf{A}}$, the uppermost level of the T_0 space $|\mathbf{A}|$, is indeed quite geometric. And it can also be shown that any arbitrary continuous function on $\mathrm{Tot}_{\mathbf{A}}$ into *any* topological space can be extended to a continuous function on $|\mathbf{A}|$, so the whole domain proves to be quite a "roomy" space with many good connections to more usual topological spaces.

A note on neighborhood structures. Topological spaces can be defined in several ways, and in general they do not carry a preferred neighborhood structure. (For example, there is no topological significance to the usual rational intervals we use to define neighborhoods for the real line: any similarly dense set of points would do in place of the rational numbers.) Domains, the way we have defined them, however, do have preferred neighborhoods. The set of finite elements of $|\mathbf{A}|$ can be defined topologically, and as we have seen they determine a convenient set of neighborhoods. (The reason for all this is the so-called zero-dimensional character of the domains. There is a higher-dimensional theory, but this leads to continuous lattices and can only be explained using the kind of presentation in Gierz, *et al.* [1980]. It is too long-winded a story for the present paper. The higher-dimensional domains do not have a preferred set of neighborhoods, however.)

Having realized this, it is a short step to giving an algebraic axiomatization of the neighborhood structure. Smyth [1975] contains a presentation in terms of the equivalent notion of

4.5 Approximable mappings between domains

Dependencies. Inside ApproximableMappingsBetweenDomains, each box is one subfolder, or one Lean file sitting directly in the folder. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

Figure 51: Approximable mappings between domains.

Once a general notion of set or domain has been defined mathematically, the next major issue is: How are the different domains to be related one to another? The answer to this important question can many times be given by defining an appropriate concept of mapping between domains. The answer need not be unique; the same collection of domains may support more than one idea of function depending on the special aspects of the domains that need to be brought out. In the case of the kinds of domains being studied here, there are two principal answers, one of which is to be explained in this section.

In order to understand an appropriate notion of a mapping or a function between domains constructed from information systems, we have to refer back to the way in which elements are introduced. As we have seen in Section 3, an element is a consistent, closed set of data objects. To generate an element, one has to generate more and more of the finite consistent subsets of the element. Note that the separate data objects have to be grouped into these finite consistent sets, because the entailment relation may require a finite set

of arbitrary size on the left in making the necessary entailments for closure. It is this kind of passage from a finite set to its closure that is to be generalized in defining mappings.

Consider two domains. To map from one to another, some information about a possible element of the first is presented as input to the function f. Then as output the function f starts generating an element. If the input were u, a consistent set of the first domain, then part of the output in the second domain might be a consistent set v. We could say that there is an input/output relationship set up by f, and indicate by $u\ f\ v$ that this relation holds going from u in the first domain to v in the second. Of course to get the full effect of f, it is necessary to take all the v's related to a given u, because even a small finite amount of input may cause an infinite amount of output. But every element of a domain is just the sum total of its finite subsets (finite approximations), so it is sufficient to make the mapping relationship go between finite sets. Here is the formal definition with the exact conditions that the relation f must satisfy.

- Definition 5.1
- Definition 5.2
- Proposition 5.3
- Proposition 5.4
- Proposition 5.5
- Proposition 5.6

The proof is immediate, since we need only interpret the input/output relation $u\ (\mathrm{const}\ b)\ v$ as meaning $v \subseteq b$. We note that our notation is somewhat ambiguous since, for example, in 5.6(iii) we are using $\mathrm{const}\ b$ in two senses: once as a mapping from $\mathbf{A}$, and once as a mapping from $\mathbf{D}$. In fact, we should hang two subscripts on the thing to fix both the source and the target of the mapping. This is too painful, however, and we generally rely on context to make the meaning clear. (Formal rules of type checking can be given, so on a computer-based system all the necessary subscripts could be put back in. Thus, the kind of ambiguity we are dealing with here is not very serious.)

4.6 Products and sums of domains

Dependencies. Inside ProductsAndSumsOfDomains, each box is one subfolder, or one Lean file sitting directly in the folder. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

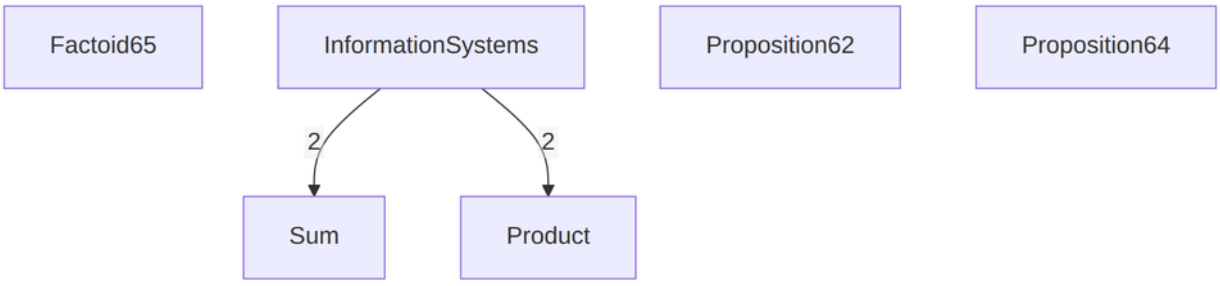

Figure 52: Products and sums of domains.

In the category of sets, the product (the cartesian product) of two sets is by definition just the set of ordered pairs of elements. We could use the same definition in the category of domains—provided we worked in terms of the elements of the domains. The disadvantage is that the determination of the product domain from data objects is lost, or at least pushed into the background. We shall therefore give a construction of products directly in terms of the given data objects, and then show how to prove that the product is just the one expected when we look at the elements.

The idea for the definition is a simple one. Think of two domains $\mathbf{A}$ and $\mathbf{B}$. A data object $X \in D_{\mathbf{A}}$ can be giving information about a possible element $x \in |\mathbf{A}|$, and a data object $Y \in D_{\mathbf{B}}$ can be giving information about a possible element $y \in |\mathbf{B}|$. How do we wish to give information about the pair (x, y)? The first piece of advice is not to say all that is known all at once. For example, if pressed, we can say we know X about the first coordinate of the pair; only later, if really pressed, we can say we also know Y about the second coordinate. The point is that data objects provide only partial information, and it does not matter if it takes several of them to give fairly complete information about the whole element. This attitude motivates, then, the particular form of our official definition.

- Definition 6.1
- Proposition 6.2
- Definition 6.3
- Proposition 6.4

It can also be shown that Propositions 6.2 and 6.4 uniquely characterize the domains $\mathbf{A} \times \mathbf{B}$ and $\mathbf{A} + \mathbf{B}$ up to isomorphism, and they give us the existence of additional mappings that are needed to show that product and sum are functors on the category of domains. We can also show from these results that the domain

$$\mathbf{BOOL} = \mathbf{1} + \mathbf{1}$$

has two elements true and false, such that any mapping on $\mathbf{BOOL}$ is uniquely determined by its action on true, false and $\perp_{\mathbf{BOOL}}$, and the values on the first two elements may be arbitrarily chosen.

4.7 The function space as a domain

Dependencies. Inside FunctionSpaceAsADomain, each box is one subfolder, or one Lean file sitting directly in the folder. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

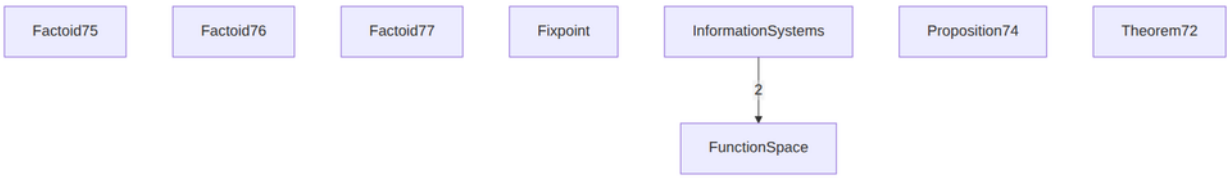

Figure 53: The function space as a domain.

Functions or mappings between domains are of basic importance for our theory, since it is through them that we most easily transform data and relate the structures into which the elements defined by the data objects enter. There are many possible functions, and large groups of them can be treated in a uniform manner. For instance, if the source and target domains match properly, any pair of functions can be composed—composition is an operation on functions of general significance. Now, if in the theory we could combine functions into domains themselves, then an operation like composition might become a mapping of the theory. Indeed, this is exactly what happens: suitably construed, composition is an approximable mapping of two arguments. Of course, for each configuration of linked source and target domains, there is a separate composition operation.

In order to make approximable mappings elements of a suitable domain, we have to discover first what their appropriate data objects are. In Section 5 this was hinted at already. To determine an approximable mapping $f : \mathbf{A} \to \mathbf{B}$, we have to say which pairs (u, v) with $u \in D_{\mathbf{A}}$ and $v \in D_{\mathbf{B}}$ stand in the mapping relation $u\ f\ v$. One such pair gives a certain (finite) amount of information about the possible functions that contain it, and an approximable mapping is completely determined by such pairs. Therefore, if there are appropriate notions of consistency and entailment for these pairs, we will be able to form a domain having functions as elements. Let us try out a formal definition first, and then look to an explanation of how it works.

- Definition 7.1
- Theorem 7.2
- Theorem 7.3
- Proposition 7.4

Token.lean

```
module

public import Mathlib.Algebra.Order.Field.Rat
public import Mathlib.Tactic.Linarith
public import Mathlib.Tactic.NormNum
public import DomainTheory.InformationSystems.InformationSystems.InfoSys

@[expose] public section

namespace DomainTheory.InformationSystems

namespace Factoid25

inductive Token : Type where
  | bot
  | interval (lo hi : ℕ) (hlt : lo < hi)

end Factoid25
end DomainTheory.InformationSystems
```

proposition_2_3_iv.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Definition22

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem proposition_2_3_iv {u v w : Finset α}
    (hu : u ∈ sys.Con) (hv : v ∈ sys.Con)
    (huv : sys.EntSet u v) (hvw : sys.EntSet v w) : sys.EntSet u w :=
  fun X hX => sys.ent_trans hu hv huv (hvw X hX)

end InfoSys
end DomainTheory.InformationSystems
```

proposition_2_3_v.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Definition22

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem proposition_2_3_v {u u' v v' : Finset α}
    (hu : u ∈ sys.Con) (hu' : u' ∈ sys.Con)
    (hsubu : u ⊆ u') (huv : sys.EntSet u v) (hsubv : v' ⊆ v) :
    sys.EntSet u' v' := by
  intro X hX
  have hEnt : sys.Ent u X := huv X (hsubv hX)
  refine sys.ent_trans hu' hu ?_ hEnt
  intro y hy
  exact sys.ent_refl hu' (hsubu hy)

end InfoSys
end DomainTheory.InformationSystems
```

proposition_2_3_iii.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Definition22

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem proposition_2_3_iii {u : Finset α} (hu : u ∈ sys.Con) : sys.EntSet u u :=
  fun _X hX => sys.ent_refl hu hX

end InfoSys
end DomainTheory.InformationSystems
```

instDecidableEq.lean

```
module

public import Mathlib.Algebra.Order.Field.Rat
public import Mathlib.Tactic.Linarith
public import Mathlib.Tactic.NormNum
public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Factoid25.Token

@[expose] public section

namespace DomainTheory.InformationSystems

namespace Factoid25

namespace Token

instance instDecidableEq : DecidableEq Token
  | bot, bot => isTrue rfl
  | bot, interval _ _ _ => isFalse Token.noConfusion
  | interval _ _ _, bot => isFalse Token.noConfusion
  | interval n m _, interval n' m' _ =>
    if h : n = n' ∧ m = m' then
      isTrue (by
        rcases h with ⟨rfl, rfl⟩
        rfl)
    else
      isFalse (by
        intro hEq
        injection hEq with hn hm
        exact h ⟨hn, hm⟩)

end Token
```

```
end Factoid25

end DomainTheory.InformationSystems
```

Sat.lean

```
module

public import Mathlib.Algebra.Order.Field.Rat
public import Mathlib.Tactic.Linarith
public import Mathlib.Tactic.NormNum
public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Factoid25.Token
public import DomainTheory.InformationSystems.InformationSystems.instDecidableEq

@[expose] public section

namespace DomainTheory.InformationSystems

namespace Factoid25

def Sat (x : ?) : Token → Prop
  | .bot => True
  | .interval lo hi _ => (lo : ?) < x ∧ x < (hi : ?)

end Factoid25

end DomainTheory.InformationSystems
```

sat_midpoint.lean

```
module

public import Mathlib.Algebra.Order.Field.Rat
public import Mathlib.Tactic.Linarith
public import Mathlib.Tactic.NormNum
public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Factoid25.Token
public import DomainTheory.InformationSystems.InformationSystems.instDecidableEq
public import DomainTheory.InformationSystems.InformationSystems.Sat

@[expose] public section

namespace DomainTheory.InformationSystems

namespace Factoid25

theorem sat_midpoint {lo hi : ℕ} (hlt : lo < hi) :
    Sat (((lo : ?) + (hi : ?)) / 2) (.interval lo hi hlt) := by
  have h2 : (0 : ?) < 2 := by norm_num
  have _hlo : (lo : ?) < (hi : ?) := Nat.cast_lt.mpr hlt
  constructor
  ·
    rw [lt_div_iff₀ h2]
```

```
    linarith
  · rw [div_lt_iff₀ h2]
    linarith

end Factoid25

end DomainTheory.InformationSystems
```

sat_sing.lean

```
module

public import Mathlib.Algebra.Order.Field.Rat
public import Mathlib.Tactic.Linarith
public import Mathlib.Tactic.NormNum
public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Factoid25.Token
public import DomainTheory.InformationSystems.InformationSystems.instDecidableEq
public import DomainTheory.InformationSystems.InformationSystems.Sat
public import DomainTheory.InformationSystems.InformationSystems.sat_midpoint

@[expose] public section

namespace DomainTheory.InformationSystems

namespace Factoid25

theorem sat_sing (t : Token) : ∃ x : ?, Sat x t := by
  cases t with
  | bot => exact ⟨0, trivial⟩
  | interval lo hi hlt => exact ⟨_, sat_midpoint hlt⟩

end Factoid25

end DomainTheory.InformationSystems
```

ofSatisfaction.lean

```
module

public import Mathlib.Algebra.Order.Field.Rat
public import Mathlib.Tactic.Linarith
public import Mathlib.Tactic.NormNum
public import DomainTheory.InformationSystems.InformationSystems.InfoSys
public import DomainTheory.InformationSystems.InformationSystems.Factoid25.Token
public import DomainTheory.InformationSystems.InformationSystems.instDecidableEq
public import DomainTheory.InformationSystems.InformationSystems.Sat
public import DomainTheory.InformationSystems.InformationSystems.sat_sing

@[expose] public section

namespace DomainTheory.InformationSystems

namespace Factoid25
```

```
def ofSatisfaction {τ : Type*} [DecidableEq τ] {Point : Type*}
    (Sat : Point → τ → Prop) (bot : τ)
    (sat_bot : ∀ p, Sat p bot)
    (sat_sing : ∀ t, ∃ p, Sat p t) : InfoSys τ where
  bot := bot
  Con := {u | ∃ p, ∀ t ∈ u, Sat p t}
  Ent u X := (∃ p, ∀ t ∈ u, Sat p t) ∧ ∀ p, (∀ t ∈ u, Sat p t) → Sat p X
  con_subset := by
    rintro u v ⟨p, hp⟩ hsub
    exact ⟨p, fun t ht => hp t (hsub ht)⟩
  con_sing := by
    intro a
    obtain ⟨p, hp⟩ := sat_sing a
    exact ⟨p, fun t ht => by
      rw [Finset.mem_singleton] at ht
      subst ht
      exact hp⟩
  ent_con := by
    rintro u a ⟨⟨p, hp⟩, hEnt⟩
    exact ⟨p, fun t ht => by
      rcases Finset.mem_insert.mp ht with rfl | ht'
      · exact hEnt p hp
      · exact hp t ht'⟩
  ent_bot := by
    intro u hu
    exact ⟨hu, fun p _ => sat_bot p⟩
  ent_refl := by
    intro u a hu ha
    exact ⟨hu, fun p hp => hp a ha⟩
  ent_trans := by
    intro u v c hv _hu hvu ⟨_, huEnt⟩
    refine ⟨hv, fun p hp => huEnt p ?_⟩
    intro y hy
    exact (hvu y hy).2 p hp

end Factoid25

end DomainTheory.InformationSystems
```

Factoid25.lean

```
module

public import Mathlib.Algebra.Order.Field.Rat
public import Mathlib.Tactic.Linarith
public import Mathlib.Tactic.NormNum
public import DomainTheory.InformationSystems.InformationSystems.InfoSys

public import DomainTheory.InformationSystems.InformationSystems.Factoid25.Token
public import DomainTheory.InformationSystems.InformationSystems.Sat
public import DomainTheory.InformationSystems.InformationSystems.ofSatisfaction
public import DomainTheory.InformationSystems.InformationSystems.instDecidableEq
public import DomainTheory.InformationSystems.InformationSystems.sat_midpoint
public import DomainTheory.InformationSystems.InformationSystems.sat_sing
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

namespace Token

end Token

def Factoid25.example_25 : InfoSys Token :=
  ofSatisfaction Sat Token.bot (fun _ => trivial) sat_sing

end DomainTheory.InformationSystems
```

proposition_2_3_vi.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Definition22

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem proposition_2_3_vi {u v v' : Finset α}
    (huv : sys.EntSet u v) (huv' : sys.EntSet u v') : sys.EntSet u (v ∪' v') := by
  intro X hX
  rcases mem_funion.mp hX with h | h
  · exact huv X h
  · exact huv' X h

end InfoSys
end DomainTheory.InformationSystems
```

Proposition23.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_i
public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_ii
public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_iii
public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_iv
public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_v
```

```
public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_vi

@[expose] public section

namespace DomainTheory.InformationSystems.InfoSys

set_option linter.unusedVariables false

theorem theorem_23.{u_1} : And
  (And
    (And
      (And
        (And
          (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
    InformationSystems.InfoSys α inst),
            @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys
              (@EmptyCollection.emptyCollection (Finset α) (@Finset.
    instEmptyCollection α))
              (@Singleton.singleton α (Finset α) (@Finset.instSingleton α)
                (@DomainTheory.InformationSystems.InfoSys.bot α inst sys)))
          (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
    InformationSystems.InfoSys α inst)
            {u v : Finset α},
            @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α
    ))
                (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
              @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v →
                @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (
    Finset α))
                  (@DomainTheory.InformationSystems.InfoSys.Con α inst sys)
                  (@DomainTheory.InformationSystems.Constructive.funion α inst u v)))
        (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
    InformationSystems.InfoSys α inst) {u : Finset α},
          @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
              (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
            @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u u))
      (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.InformationSystems
    .InfoSys α inst)
        {u v w : Finset α},
        @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
            (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
          @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
              (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) v →
            @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v →
              @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys v w →
                @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u w))
    (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.InformationSystems.
    InfoSys α inst)
      {u u' v v' : Finset α},
      @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
          (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
        @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
            (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u' →
          @LE.le (Finset α)
            (@Preorder.toLE (Finset α) (@PartialOrder.toPreorder (Finset α) (@Finset
```

```
  .instPartialOrder α))) u u' →
          @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v →
            @LE.le (Finset α)
                (@Preorder.toLE (Finset α) (@PartialOrder.toPreorder (Finset α) (
  @Finset.instPartialOrder α))) v' v →
              @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u' v'))
(∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.InformationSystems.
  InfoSys α inst) {u v v' : Finset α},
  @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v →
    @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v' →
      @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u
        (@DomainTheory.InformationSystems.Constructive.funion α inst v v')) :=
@And.intro
(And
  (And
    (And
      (And
        (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
  InformationSystems.InfoSys α inst),
          @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys
            (@EmptyCollection.emptyCollection (Finset α) (@Finset.
  instEmptyCollection α))
            (@Singleton.singleton α (Finset α) (@Finset.instSingleton α)
              (@DomainTheory.InformationSystems.InfoSys.bot α inst sys)))
        (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
  InformationSystems.InfoSys α inst)
          {u v : Finset α},
          @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α
  ))
              (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
            @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v →
              @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (
  Finset α))
                (@DomainTheory.InformationSystems.InfoSys.Con α inst sys)
                (@DomainTheory.InformationSystems.Constructive.funion α inst u v)))
      (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
  InformationSystems.InfoSys α inst) {u : Finset α},
        @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
            (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
          @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u u))
    (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.InformationSystems
  .InfoSys α inst)
      {u v w : Finset α},
      @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
          (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
        @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
            (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) v →
          @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v →
            @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys v w →
              @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u w))
  (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.InformationSystems.
  InfoSys α inst)
    {u u' v v' : Finset α},
    @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
        (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
      @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
```

```
          (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u' →
        @LE.le (Finset α)
            (@Preorder.toLE (Finset α) (@PartialOrder.toPreorder (Finset α) (@Finset
  .instPartialOrder α))) u u' →
          @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v →
            @LE.le (Finset α)
                (@Preorder.toLE (Finset α) (@PartialOrder.toPreorder (Finset α) (
  @Finset.instPartialOrder α))) v' v →
              @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u' v'))
(∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.InformationSystems.
  InfoSys α inst) {u v v' : Finset α},
  @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v →
    @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v' →
      @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u
        (@DomainTheory.InformationSystems.Constructive.funion α inst v v'))
(@And.intro
  (And
    (And
      (And
        (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
  InformationSystems.InfoSys α inst),
          @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys
            (@EmptyCollection.emptyCollection (Finset α) (@Finset.
  instEmptyCollection α))
            (@Singleton.singleton α (Finset α) (@Finset.instSingleton α)
              (@DomainTheory.InformationSystems.InfoSys.bot α inst sys)))
        (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
  InformationSystems.InfoSys α inst)
          {u v : Finset α},
          @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α
  ))
              (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
            @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v →
              @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (
  Finset α))
                (@DomainTheory.InformationSystems.InfoSys.Con α inst sys)
                (@DomainTheory.InformationSystems.Constructive.funion α inst u v)))
      (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
  InformationSystems.InfoSys α inst) {u : Finset α},
        @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
            (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
          @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u u))
    (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.InformationSystems
  .InfoSys α inst)
      {u v w : Finset α},
      @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
          (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
        @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
            (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) v →
          @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v →
            @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys v w →
              @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u w))
  (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.InformationSystems.
  InfoSys α inst)
    {u u' v v' : Finset α},
    @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
```

```
      (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
    @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
        (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u' →
      @LE.le (Finset α)
          (@Preorder.toLE (Finset α) (@PartialOrder.toPreorder (Finset α) (@Finset
.instPartialOrder α))) u u' →
        @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v →
          @LE.le (Finset α)
              (@Preorder.toLE (Finset α) (@PartialOrder.toPreorder (Finset α) (
@Finset.instPartialOrder α))) v' v →
            @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u' v')
 (@And.intro
   (And
     (And
       (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
InformationSystems.InfoSys α inst),
        @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys
          (@EmptyCollection.emptyCollection (Finset α) (@Finset.
instEmptyCollection α))
          (@Singleton.singleton α (Finset α) (@Finset.instSingleton α)
            (@DomainTheory.InformationSystems.InfoSys.bot α inst sys)))
       (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
InformationSystems.InfoSys α inst)
        {u v : Finset α},
        @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α
))
            (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
          @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v →
            @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (
Finset α))
              (@DomainTheory.InformationSystems.InfoSys.Con α inst sys)
              (@DomainTheory.InformationSystems.Constructive.funion α inst u v)))
     (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
InformationSystems.InfoSys α inst) {u : Finset α},
       @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
           (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
         @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u u))
   (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.InformationSystems
.InfoSys α inst)
     {u v w : Finset α},
     @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
         (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
       @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
           (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) v →
         @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v →
           @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys v w →
             @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u w)
   (@And.intro
     (And
       (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
InformationSystems.InfoSys α inst),
        @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys
          (@EmptyCollection.emptyCollection (Finset α) (@Finset.
instEmptyCollection α))
          (@Singleton.singleton α (Finset α) (@Finset.instSingleton α)
            (@DomainTheory.InformationSystems.InfoSys.bot α inst sys)))
```

```
      (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
    InformationSystems.InfoSys α inst)
        {u v : Finset α},
        @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α
    ))
            (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
          @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v →
            @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (
    Finset α))
              (@DomainTheory.InformationSystems.InfoSys.Con α inst sys)
              (@DomainTheory.InformationSystems.Constructive.funion α inst u v)))
    (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
    InformationSystems.InfoSys α inst) {u : Finset α},
      @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
          (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
        @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u u)
    (@And.intro
      (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
    InformationSystems.InfoSys α inst),
        @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys
          (@EmptyCollection.emptyCollection (Finset α) (@Finset.
    instEmptyCollection α))
          (@Singleton.singleton α (Finset α) (@Finset.instSingleton α)
            (@DomainTheory.InformationSystems.InfoSys.bot α inst sys)))
      (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.
    InformationSystems.InfoSys α inst)
        {u v : Finset α},
        @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α
    ))
            (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u →
          @DomainTheory.InformationSystems.InfoSys.EntSet α inst sys u v →
            @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (
    Finset α))
              (@DomainTheory.InformationSystems.InfoSys.Con α inst sys)
              (@DomainTheory.InformationSystems.Constructive.funion α inst u v))
      @DomainTheory.InformationSystems.InfoSys.proposition_2_3_i
      @DomainTheory.InformationSystems.InfoSys.proposition_2_3_ii)
    @DomainTheory.InformationSystems.InfoSys.proposition_2_3_iii)
  @DomainTheory.InformationSystems.InfoSys.proposition_2_3_iv)
 @DomainTheory.InformationSystems.InfoSys.proposition_2_3_v)
@DomainTheory.InformationSystems.InfoSys.proposition_2_3_vi

end DomainTheory.InformationSystems.InfoSys
```

FunToken.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

def FunToken (A : InfoSys α) (B : InfoSys β) : Type _ :=
  {p : Finset α × Finset β // p.1 ∈ A.Con ∧ p.2 ∈ B.Con}

end InfoSys

end DomainTheory.InformationSystems
```

factoid_3_2.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Proposition23

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem factoid_3_2 (x : sys.Element) : sys.bot ∈ x.carrier := by
  have hempty : (↑(∅ : Finset α) : Set α) ⊆ x.carrier := by
    intro a ha
    exact False.elim (Finset.notMem_empty a (Finset.mem_coe.1 ha))
  have hEnt : sys.Ent ∅ sys.bot := sys.ent_bot sys.con_empty
  exact x.closed ∅ sys.bot hempty hEnt

end InfoSys
end DomainTheory.InformationSystems
```

SumToken.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys
```

```
variable {α β : Type*} [DecidableEq α] [DecidableEq β]

inductive SumToken (α β : Type*) where
  | left : α → SumToken α β
  | right : β → SumToken α β
  | bot : SumToken α β

end InfoSys
end DomainTheory.InformationSystems
```

instDecidableEqSumToken.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

instance instDecidableEqSumToken : DecidableEq (SumToken α β)
  | .left a, .left b =>
      if h : a = b then isTrue (h ▶ rfl)
      else isFalse fun h' => h (SumToken.left.inj h')
  | .right a, .right b =>
      if h : a = b then isTrue (h ▶ rfl)
      else isFalse fun h' => h (SumToken.right.inj h')
  | .bot, .bot => isTrue rfl
  | .left _, .right _ => isFalse fun h => nomatch h
  | .left _, .bot => isFalse fun h => nomatch h
  | .right _, .left _ => isFalse fun h => nomatch h
  | .right _, .bot => isFalse fun h => nomatch h
  | .bot, .left _ => isFalse fun h => nomatch h
  | .bot, .right _ => isFalse fun h => nomatch h

end InfoSys

end DomainTheory.InformationSystems
```

lftInsert.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumToken
```

```
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instDecidableEqSumToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

def lftInsert : SumToken α β → Finset α → Finset α
  | .left x => insert x
  | .right _ => id
  | .bot => id

end InfoSys

end DomainTheory.InformationSystems
```

instLeftCommutativeLftInsert.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instDecidableEqSumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.lftInsert

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

instance instLeftCommutativeLftInsert :
    LeftCommutative (lftInsert : SumToken α β → Finset α → Finset α) :=
  ⟨fun p q s => by
    cases p <;> cases q <;> first | exact insert_comm' _ _ s | rfl⟩

end InfoSys

end DomainTheory.InformationSystems
```

closure.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Proposition23

public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_ii
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def closure (u : Finset α) (hu : u ∈ sys.Con) : sys.Element where
  carrier := {X | sys.Ent u X}
  consistent := by
    intro Y hY
    have hEnt : sys.EntSet u Y := fun X hX => hY (Finset.mem_coe.2 hX)
    exact sys.con_subset (proposition_2_3_ii sys hu hEnt) (subset_funion_right _ _)
  closed := by
    intro Y a hY hEnt
    have hYcon : Y ∈ sys.Con := by
      have hEntY : sys.EntSet u Y := fun X hX => hY (Finset.mem_coe.2 hX)
      exact sys.con_subset (proposition_2_3_ii sys hu hEntY) (subset_funion_right _ _)
    exact sys.ent_trans hu hYcon (fun y hy => hY (Finset.mem_coe.2 hy)) hEnt

end InfoSys

end DomainTheory.InformationSystems
```

subset_closure.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35.closure

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem subset_closure {u : Finset α} (hu : u ∈ sys.Con) :
    ↑u ⊆ (sys.closure u hu).carrier :=
```

```
  fun _ hX => sys.ent_refl hu (Finset.mem_coe.1 hX)

end InfoSys
end DomainTheory.InformationSystems
```

mem_closure_iff.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35.closure

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem mem_closure_iff {u : Finset α} (hu : u ∈ sys.Con) {X : α} :
    X ∈ (sys.closure u hu).carrier ↔ sys.Ent u X := Iff.rfl

end InfoSys
end DomainTheory.InformationSystems
```

rhtInsert.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instDecidableEqSumToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

def rhtInsert : SumToken α β → Finset β → Finset β
  | .right y => insert y
  | .left _ => id
  | .bot => id
```

```
end InfoSys

end DomainTheory.InformationSystems
```

instLeftCommutativeRhtInsert.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instDecidableEqSumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.rhtInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeLftInsert

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

instance instLeftCommutativeRhtInsert :
    LeftCommutative (rhtInsert : SumToken α β → Finset β → Finset β) :=
  ⟨fun p q s => by
    cases p <;> cases q <;> first | exact insert_comm' _ _ s | rfl⟩

end InfoSys

end DomainTheory.InformationSystems
```

mem_foldr_lft.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instDecidableEqSumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.lftInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeLftInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeRhtInsert

@[expose] public section
```

```
namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

omit [DecidableEq β] in

theorem mem_foldr_lft (s : Multiset (SumToken α β)) (x : α) :
    x ∈ Multiset.foldr lftInsert (∅ : Finset α) s ↔ ∃ p ∈ s, p = .left x := by
  refine Multiset.induction_on s ?_ ?_
  · constructor
    · intro hx
      exact False.elim (Finset.notMem_empty x hx)
    · rintro ⟨_, hp, _⟩
      exact False.elim (by cases hp)
  · intro p t ih
    cases p with
    | left a =>
      simp only [Multiset.foldr_cons, lftInsert, Finset.mem_insert, ih, Multiset.
    mem_cons]
      constructor
      · rintro (hx | ⟨q, hq, hq'⟩)
        · exact ⟨.left a, Or.inl rfl, congrArg SumToken.left hx.symm⟩
        · exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · injection hq' with hx
          exact Or.inl hx.symm
        · exact Or.inr ⟨q, hq, hq'⟩
    | right b =>
      simp only [Multiset.foldr_cons, lftInsert, id_eq, ih, Multiset.mem_cons]
      constructor
      · rintro ⟨q, hq, hq'⟩
        exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · exact False.elim (nomatch hq')
        · exact ⟨q, hq, hq'⟩
    | bot =>
      simp only [Multiset.foldr_cons, lftInsert, id_eq, ih, Multiset.mem_cons]
      constructor
      · rintro ⟨q, hq, hq'⟩
        exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · exact False.elim (nomatch hq')
        · exact ⟨q, hq, hq'⟩

end InfoSys
```

```
end DomainTheory.InformationSystems
```

lftFinset.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instDecidableEqSumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.lftInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeLftInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeRhtInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    mem_foldr_lft

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]
variable (A : InfoSys α) (B : InfoSys β)

def lftFinset (u : Finset (SumToken α β)) : Finset α :=
  Multiset.foldr lftInsert (∅ : Finset α) u.1

omit [DecidableEq β] in

theorem mem_lftFinset {u : Finset (SumToken α β)} {x : α} :
    x ∈ lftFinset u ↔ SumToken.left x ∈ u := by
  unfold lftFinset
  rw [mem_foldr_lft]
  constructor
  · rintro ⟨p, hp, hp'⟩
    rwa [← hp']
  · intro hx
    exact ⟨.left x, hx, rfl⟩

omit [DecidableEq β] in

theorem lftFinset.empty : lftFinset (∅ : Finset (SumToken α β)) = ∅ := by
  ext x
  constructor
  · intro hx
    exact False.elim (Finset.notMem_empty _ ((mem_lftFinset).1 hx))
  · intro hx
    exact False.elim (Finset.notMem_empty x hx)
```

```
theorem lftFinset.funion (u v : Finset (SumToken α β)) :
    lftFinset (u ∪' v) = lftFinset u ∪' lftFinset v := by
  ext x
  constructor
  · intro hx
    have : SumToken.left x ∈ u ∪' v := (mem_lftFinset).1 hx
    rcases mem_funion.mp this with h | h
    · exact mem_funion.mpr (Or.inl ((mem_lftFinset).2 h))
    · exact mem_funion.mpr (Or.inr ((mem_lftFinset).2 h))
  · intro hx
    rcases mem_funion.mp hx with h | h
    · exact (mem_lftFinset).2 (mem_funion.mpr (Or.inl ((mem_lftFinset).1 h)))
    · exact (mem_lftFinset).2 (mem_funion.mpr (Or.inr ((mem_lftFinset).1 h)))

theorem lftFinset.insert_bot (u : Finset (SumToken α β)) :
    lftFinset (insert (.bot : SumToken α β) u) = lftFinset u := by
  ext x
  constructor
  · intro hx
    have : SumToken.left x ∈ insert .bot u := (mem_lftFinset).1 hx
    rcases Finset.mem_insert.mp this with h | h
    · exact False.elim (nomatch h)
    · exact (mem_lftFinset).2 h
  · intro hx
    exact (mem_lftFinset).2 (Finset.mem_insert.mpr (Or.inr ((mem_lftFinset).1 hx)))

theorem lftFinset.insert_left (u : Finset (SumToken α β)) (x : α) :
    lftFinset (insert (.left x) u) = insert x (lftFinset u) := by
  ext y
  constructor
  · intro hy
    have : SumToken.left y ∈ insert (.left x) u := (mem_lftFinset).1 hy
    rcases Finset.mem_insert.mp this with h | h
    · injection h with hy'
      exact Finset.mem_insert.mpr (Or.inl hy')
    · exact Finset.mem_insert.mpr (Or.inr ((mem_lftFinset).2 h))
  · intro hy
    rcases Finset.mem_insert.mp hy with hy' | hy'
    · exact (mem_lftFinset).2 (Finset.mem_insert.mpr (Or.inl (congrArg SumToken.left hy
    ')))
    · exact (mem_lftFinset).2 (Finset.mem_insert.mpr (Or.inr ((mem_lftFinset).1 hy')))

theorem lftFinset.insert_right (u : Finset (SumToken α β)) (y : β) :
    lftFinset (insert (.right y) u) = lftFinset u := by
  ext x
  constructor
  · intro hx
    have : SumToken.left x ∈ insert (.right y) u := (mem_lftFinset).1 hx
    rcases Finset.mem_insert.mp this with h | h
    · exact False.elim (nomatch h)
    · exact (mem_lftFinset).2 h
  · intro hx
    exact (mem_lftFinset).2 (Finset.mem_insert.mpr (Or.inr ((mem_lftFinset).1 hx)))

omit [DecidableEq β] in
```

```
theorem lftFinset.mono {u v : Finset (SumToken α β)} (h : v ⊆ u) :
    lftFinset v ⊆ lftFinset u := by
  intro x hx
  exact (mem_lftFinset).2 (h ((mem_lftFinset).1 hx))

omit [DecidableEq β] in

theorem lftFinset.singleton_bot :
    lftFinset ({.bot} : Finset (SumToken α β)) = ∅ := by
  ext x
  constructor
  · intro hx
    have : SumToken.left x ∈ ({.bot} : Finset _) := (mem_lftFinset).1 hx
    exact False.elim (nomatch Finset.mem_singleton.mp this)
  · intro hx
    exact False.elim (Finset.notMem_empty x hx)

omit [DecidableEq β] in

theorem lftFinset.singleton_left (x : α) :
    lftFinset ({.left x} : Finset (SumToken α β)) = {x} := by
  ext y
  simp only [mem_lftFinset, Finset.mem_singleton]
  exact ⟨SumToken.left.inj, fun h => h ▸ rfl⟩

end InfoSys

end DomainTheory.InformationSystems
```

mem_foldr_rht.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instDecidableEqSumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.rhtInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeLftInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeRhtInsert

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)
```

```
omit [DecidableEq α] in

theorem mem_foldr_rht (s : Multiset (SumToken α β)) (y : β) :
    y ∈ Multiset.foldr rhtInsert (∅ : Finset β) s ↔ ∃ p ∈ s, p = .right y := by
  refine Multiset.induction_on s ?_ ?_
  · constructor
    · intro hy
      exact False.elim (Finset.notMem_empty y hy)
    · rintro ⟨_, hp, _⟩
      exact False.elim (by cases hp)
  · intro p t ih
    cases p with
    | right b =>
      simp only [Multiset.foldr_cons, rhtInsert, Finset.mem_insert, ih, Multiset.
    mem_cons]
      constructor
      · rintro (hy | ⟨q, hq, hq'⟩)
        · exact ⟨.right b, Or.inl rfl, congrArg SumToken.right hy.symm⟩
        · exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · injection hq' with hy
          exact Or.inl hy.symm
        · exact Or.inr ⟨q, hq, hq'⟩
    | left a =>
      simp only [Multiset.foldr_cons, rhtInsert, id_eq, ih, Multiset.mem_cons]
      constructor
      · rintro ⟨q, hq, hq'⟩
        exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · exact False.elim (nomatch hq')
        · exact ⟨q, hq, hq'⟩
    | bot =>
      simp only [Multiset.foldr_cons, rhtInsert, id_eq, ih, Multiset.mem_cons]
      constructor
      · rintro ⟨q, hq, hq'⟩
        exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · exact False.elim (nomatch hq')
        · exact ⟨q, hq, hq'⟩

end InfoSys

end DomainTheory.InformationSystems
```

rhtFinset.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumToken
```

```
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instDecidableEqSumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.rhtInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeLftInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeRhtInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    mem_foldr_rht

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]
variable (A : InfoSys α) (B : InfoSys β)

def rhtFinset (u : Finset (SumToken α β)) : Finset β :=
  Multiset.foldr rhtInsert (∅ : Finset β) u.1

omit [DecidableEq α] in

theorem mem_rhtFinset {u : Finset (SumToken α β)} {y : β} :
    y ∈ rhtFinset u ↔ SumToken.right y ∈ u := by
  unfold rhtFinset
  rw [mem_foldr_rht]
  constructor
  · rintro ⟨p, hp, hp'⟩
    rwa [← hp']
  · intro hy
    exact ⟨.right y, hy, rfl⟩

omit [DecidableEq α] in

theorem rhtFinset.empty : rhtFinset (∅ : Finset (SumToken α β)) = ∅ := by
  ext y
  constructor
  · intro hy
    exact False.elim (Finset.notMem_empty _ ((mem_rhtFinset).1 hy))
  · intro hy
    exact False.elim (Finset.notMem_empty y hy)

theorem rhtFinset.funion (u v : Finset (SumToken α β)) :
    rhtFinset (u ∪' v) = rhtFinset u ∪' rhtFinset v := by
  ext y
  constructor
  · intro hy
    have : SumToken.right y ∈ u ∪' v := (mem_rhtFinset).1 hy
    rcases mem_funion.mp this with h | h
    · exact mem_funion.mpr (Or.inl ((mem_rhtFinset).2 h))
    · exact mem_funion.mpr (Or.inr ((mem_rhtFinset).2 h))
  · intro hy
```

```
    rcases mem_funion.mp hy with h | h
    · exact (mem_rhtFinset).2 (mem_funion.mpr (Or.inl ((mem_rhtFinset).1 h)))
    · exact (mem_rhtFinset).2 (mem_funion.mpr (Or.inr ((mem_rhtFinset).1 h)))

theorem rhtFinset.insert_bot (u : Finset (SumToken α β)) :
    rhtFinset (insert (.bot : SumToken α β) u) = rhtFinset u := by
  ext y
  constructor
  · intro hy
    have : SumToken.right y ∈ insert .bot u := (mem_rhtFinset).1 hy
    rcases Finset.mem_insert.mp this with h | h
    · exact False.elim (nomatch h)
    · exact (mem_rhtFinset).2 h
  · intro hy
    exact (mem_rhtFinset).2 (Finset.mem_insert.mpr (Or.inr ((mem_rhtFinset).1 hy)))

theorem rhtFinset.insert_left (u : Finset (SumToken α β)) (x : α) :
    rhtFinset (insert (.left x) u) = rhtFinset u := by
  ext y
  constructor
  · intro hy
    have : SumToken.right y ∈ insert (.left x) u := (mem_rhtFinset).1 hy
    rcases Finset.mem_insert.mp this with h | h
    · exact False.elim (nomatch h)
    · exact (mem_rhtFinset).2 h
  · intro hy
    exact (mem_rhtFinset).2 (Finset.mem_insert.mpr (Or.inr ((mem_rhtFinset).1 hy)))

theorem rhtFinset.insert_right (u : Finset (SumToken α β)) (y : β) :
    rhtFinset (insert (.right y) u) = insert y (rhtFinset u) := by
  ext z
  constructor
  · intro hz
    have : SumToken.right z ∈ insert (.right y) u := (mem_rhtFinset).1 hz
    rcases Finset.mem_insert.mp this with h | h
    · injection h with hz'
      exact Finset.mem_insert.mpr (Or.inl hz')
    · exact Finset.mem_insert.mpr (Or.inr ((mem_rhtFinset).2 h))
  · intro hz
    rcases Finset.mem_insert.mp hz with hz' | hz'
    · exact (mem_rhtFinset).2 (Finset.mem_insert.mpr (Or.inl (congrArg SumToken.right
    hz')))
    · exact (mem_rhtFinset).2 (Finset.mem_insert.mpr (Or.inr ((mem_rhtFinset).1 hz')))

omit [DecidableEq α] in

theorem rhtFinset.mono {u v : Finset (SumToken α β)} (h : v ⊆ u) :
    rhtFinset v ⊆ rhtFinset u := by
  intro y hy
  exact (mem_rhtFinset).2 (h ((mem_rhtFinset).1 hy))

omit [DecidableEq α] in

theorem rhtFinset.singleton_bot :
    rhtFinset ({.bot} : Finset (SumToken α β)) = ∅ := by
  ext y
```

```
  constructor
  · intro hy
    have : SumToken.right y ∈ ({.bot} : Finset _) := (mem_rhtFinset).1 hy
    exact False.elim (nomatch Finset.mem_singleton.mp this)
  · intro hy
    exact False.elim (Finset.notMem_empty y hy)

omit [DecidableEq α] in

theorem rhtFinset.singleton_right (y : β) :
    rhtFinset ({.right y} : Finset (SumToken α β)) = {y} := by
  ext z
  simp only [mem_rhtFinset, Finset.mem_singleton]
  exact ⟨SumToken.right.inj, fun h => h ▶ rfl⟩

end InfoSys

end DomainTheory.InformationSystems
```

SumCon.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instDecidableEqSumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeLftInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeRhtInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.lftFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.rhtFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]
variable (A : InfoSys α) (B : InfoSys β)

def SumCon (u : Finset (SumToken α β)) : Prop :=
  (lftFinset u ∈ A.Con ∧ rhtFinset u = ∅) ∨
    (lftFinset u = ∅ ∧ rhtFinset u ∈ B.Con)

theorem SumCon.lft_con_of_lft_nonempty {u : Finset (SumToken α β)}
    (hu : SumCon A B u) (hne : lftFinset u = ∅) : lftFinset u ∈ A.Con := by
  rcases hu with ⟨hl, _⟩ | ⟨hl, _⟩
  · exact hl
  · exact False.elim (hne hl)
```

```
theorem SumCon.lft_empty_of_rht_nonempty {u : Finset (SumToken α β)}
    (hu : SumCon A B u) (hne : rhtFinset u = ∅) : lftFinset u = ∅ := by
  rcases hu with ⟨_, hr⟩ | ⟨hl, _⟩
  · exact False.elim (hne hr)
  · exact hl

theorem SumCon.rht_con_of_rht_nonempty {u : Finset (SumToken α β)}
    (hu : SumCon A B u) (hne : rhtFinset u = ∅) : rhtFinset u ∈ B.Con := by
  rcases hu with ⟨_, hr⟩ | ⟨_, hr⟩
  · exact False.elim (hne hr)
  · exact hr

theorem SumCon.rht_empty_of_lft_nonempty {u : Finset (SumToken α β)}
    (hu : SumCon A B u) (hne : lftFinset u = ∅) : rhtFinset u = ∅ := by
  rcases hu with ⟨_, hr⟩ | ⟨hl, _⟩
  · exact hr
  · exact False.elim (hne hl)

end InfoSys

end DomainTheory.InformationSystems
```

Factoid35.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35.
    subset_closure

@[expose] public section

namespace DomainTheory.InformationSystems.InfoSys

set_option linter.unusedVariables false

theorem theorem_35.{u_1} : ∀ {α : Type u_1} [inst : DecidableEq α] (sys :
    @DomainTheory.InformationSystems.InfoSys α inst) {u : Finset α}
  (hu :
    @Membership.mem (Finset α) (Set (Finset α)) (@Set.instMembership (Finset α))
      (@DomainTheory.InformationSystems.InfoSys.Con α inst sys) u),
  @LE.le (Set α) (@Set.instLE α) (@SetLike.coe (Finset α) α (@Finset.instSetLike α) u)
    (@DomainTheory.InformationSystems.InfoSys.Element.carrier α inst sys
      (@DomainTheory.InformationSystems.InfoSys.closure α inst sys u hu)) :=
  @DomainTheory.InformationSystems.InfoSys.subset_closure

end DomainTheory.InformationSystems.InfoSys
```

approxUnion.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def approxUnion (x : sys.Element) : Set α :=
  {a | ∃ (u : Finset α) (hu : u ∈ sys.Con),
    ↑u ⊆ x.carrier ∧ a ∈ (sys.closure u hu).carrier}

end InfoSys

end DomainTheory.InformationSystems
```

mem_element_iff_mem_closure.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36.approxUnion

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem mem_element_iff_mem_closure (x : sys.Element) (a : α) :
    a ∈ x.carrier ↔ a ∈ sys.approxUnion x := by
  constructor
  · intro ha
    refine ⟨{a}, sys.con_sing a, ?_, ?_⟩
    · intro b hb
      have hb' : b ∈ ({a} : Finset α) := Finset.mem_coe.1 hb
      rw [Finset.mem_singleton] at hb'
      subst hb'
      exact ha
    · exact sys.ent_refl (sys.con_sing a) (Finset.mem_singleton_self a)
  · rintro ⟨u, hu, hsub, ha⟩
    exact x.closed u a hsub ha

end InfoSys
end DomainTheory.InformationSystems
```

element_eq_approxUnion.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36.approxUnion
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36.
    mem_element_iff_mem_closure

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem element_eq_approxUnion (x : sys.Element) : x.carrier = sys.approxUnion x := by
  ext a
  exact sys.mem_element_iff_mem_closure x a

end InfoSys
end DomainTheory.InformationSystems
```

Factoid36.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36.
    element_eq_approxUnion
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36.
    mem_element_iff_mem_closure

@[expose] public section

namespace DomainTheory.InformationSystems.InfoSys

set_option linter.unusedVariables false

theorem theorem_36.{u_1} : And
  (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.InformationSystems.
    InfoSys α inst)
    (x : @DomainTheory.InformationSystems.InfoSys.Element α inst sys),
    @Eq (Set α) (@DomainTheory.InformationSystems.InfoSys.Element.carrier α inst sys x
    )
      (@DomainTheory.InformationSystems.InfoSys.approxUnion α inst sys x))
  (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.InformationSystems.
    InfoSys α inst)
    (x : @DomainTheory.InformationSystems.InfoSys.Element α inst sys) (a : α),
    Iff
      (@Membership.mem α (Set α) (@Set.instMembership α)
        (@DomainTheory.InformationSystems.InfoSys.Element.carrier α inst sys x) a)
```

```
      (@Membership.mem α (Set α) (@Set.instMembership α)
        (@DomainTheory.InformationSystems.InfoSys.approxUnion α inst sys x) a)) :=
  @And.intro
  (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.InformationSystems.
    InfoSys α inst)
    (x : @DomainTheory.InformationSystems.InfoSys.Element α inst sys),
    @Eq (Set α) (@DomainTheory.InformationSystems.InfoSys.Element.carrier α inst sys x
    )
      (@DomainTheory.InformationSystems.InfoSys.approxUnion α inst sys x))
  (∀ {α : Type u_1} [inst : DecidableEq α] (sys : @DomainTheory.InformationSystems.
    InfoSys α inst)
    (x : @DomainTheory.InformationSystems.InfoSys.Element α inst sys) (a : α),
    Iff
      (@Membership.mem α (Set α) (@Set.instMembership α)
        (@DomainTheory.InformationSystems.InfoSys.Element.carrier α inst sys x) a)
      (@Membership.mem α (Set α) (@Set.instMembership α)
        (@DomainTheory.InformationSystems.InfoSys.approxUnion α inst sys x) a))
  @DomainTheory.InformationSystems.InfoSys.element_eq_approxUnion
  @DomainTheory.InformationSystems.InfoSys.mem_element_iff_mem_closure

end DomainTheory.InformationSystems.InfoSys
```

sumBot.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instDecidableEqSumToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

def sumBot : SumToken α β := .bot

end InfoSys

end DomainTheory.InformationSystems
```

closure_le_of_entSet.lean

```
module
```

```
public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36.approxUnion

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem closure_le_of_entSet {u w : Finset α} (hu : u ∈ sys.Con) (hw : w ∈ sys.Con)
    (h : sys.EntSet w u) : sys.closure u hu ≤ sys.closure w hw := by
  intro a ha
  exact sys.ent_trans hw hu h ha

end InfoSys
end DomainTheory.InformationSystems
```

closure_le_of_subset.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36.approxUnion
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36.
    closure_le_of_entSet

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem closure_le_of_subset {u w : Finset α} (hu : u ∈ sys.Con) (hw : w ∈ sys.Con)
    (hsub : u ⊆ w) : sys.closure u hu ≤ sys.closure w hw :=
  sys.closure_le_of_entSet hu hw fun _ hy => sys.ent_refl hw (hsub hy)

end InfoSys
end DomainTheory.InformationSystems
```

Factoid32.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid32.factoid_3_2
```

```
@[expose] public section

namespace DomainTheory.InformationSystems.InfoSys

set_option linter.unusedVariables false

theorem theorem_32.{u_1} : ∀ {α : Type u_1} [inst : DecidableEq α] (sys :
    @DomainTheory.InformationSystems.InfoSys α inst)
  (x : @DomainTheory.InformationSystems.InfoSys.Element α inst sys),
  @Membership.mem α (Set α) (@Set.instMembership α)
    (@DomainTheory.InformationSystems.InfoSys.Element.carrier α inst sys x)
    (@DomainTheory.InformationSystems.InfoSys.bot α inst sys) :=
  @DomainTheory.InformationSystems.InfoSys.factoid_3_2

end DomainTheory.InformationSystems.InfoSys
```

botElement.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid32

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def botElement : sys.Element where
  carrier := {X | sys.Ent {sys.bot} X}
  consistent := by
    intro Y hY
    have hbot : ({sys.bot} : Finset α) ∈ sys.Con := sys.con_sing sys.bot
    have hEnt : sys.EntSet {sys.bot} Y := fun X hX => hY (Finset.mem_coe.2 hX)
    have hunion : {sys.bot} ∪' Y ∈ sys.Con := proposition_2_3_ii sys hbot hEnt
    exact sys.con_subset hunion (subset_funion_right _ _)
  closed := by
    intro Y a hY hEnt
    have hbot : ({sys.bot} : Finset α) ∈ sys.Con := sys.con_sing sys.bot
    have hYcon : Y ∈ sys.Con := by
      have hEntY : sys.EntSet {sys.bot} Y := fun X hX => hY (Finset.mem_coe.2 hX)
      exact sys.con_subset (proposition_2_3_ii sys hbot hEntY) (subset_funion_right _
    _)
    exact sys.ent_trans hbot hYcon (fun y hy => hY (Finset.mem_coe.2 hy)) hEnt

theorem botElement.le (x : sys.Element) : sys.botElement ≤ x := by
  intro a ha
  have hsub : (↑({sys.bot} : Finset α) : Set α) ⊆ x.carrier := by
    intro b hb
    have hb' : b ∈ ({sys.bot} : Finset α) := Finset.mem_coe.1 hb
```

```
    rw [Finset.mem_singleton] at hb'
    subst hb'
    exact factoid_3_2 sys x
  exact x.closed {sys.bot} a hsub ha

end InfoSys

end DomainTheory.InformationSystems
```

Factoid33.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid33.botElement

@[expose] public section

namespace DomainTheory.InformationSystems.InfoSys

set_option linter.unusedVariables false

theorem theorem_33.{u_1} : ∀ {α : Type u_1} [inst : DecidableEq α] (sys :
    @DomainTheory.InformationSystems.InfoSys α inst)
  (x : @DomainTheory.InformationSystems.InfoSys.Element α inst sys),
  @LE.le (@DomainTheory.InformationSystems.InfoSys.Element α inst sys)
    (@Preorder.toLE (@DomainTheory.InformationSystems.InfoSys.Element α inst sys)
      (@PartialOrder.toPreorder (@DomainTheory.InformationSystems.InfoSys.Element α
    inst sys)
        (@DomainTheory.InformationSystems.InfoSys.instPartialOrderElement α inst sys))
    )
    (@DomainTheory.InformationSystems.InfoSys.botElement α inst sys) x :=
  @DomainTheory.InformationSystems.InfoSys.botElement.le

end DomainTheory.InformationSystems.InfoSys
```

inf.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid33

@[expose] public section

namespace DomainTheory.InformationSystems
namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def inf (x y : sys.Element) : sys.Element where
  carrier := x.carrier ∩ y.carrier
  consistent := fun Y hY =>
    x.consistent Y (Set.Subset.trans hY Set.inter_subset_left)
  closed := fun Y a hY hEnt =>
    ⟨x.closed Y a (Set.Subset.trans hY Set.inter_subset_left) hEnt,
     y.closed Y a (Set.Subset.trans hY Set.inter_subset_right) hEnt⟩
```

```
theorem inf.le_left (x y : sys.Element) : sys.inf x y ≤ x :=
  Set.inter_subset_left

theorem inf.le_right (x y : sys.Element) : sys.inf x y ≤ y :=
  Set.inter_subset_right

end InfoSys
end DomainTheory.InformationSystems
```

le_iff_inf_eq.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid33
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.inf

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem le_iff_inf_eq {x y : sys.Element} : x ≤ y ↔ sys.inf x y = x := by
  constructor
  · intro h
    refine le_antisymm (inf.le_left sys x y) ?_
    intro a ha
    exact ⟨ha, h ha⟩
  · intro heq
    have hc : x.carrier = x.carrier ∩ y.carrier :=
      Eq.symm (congrArg Element.carrier heq)
    intro a ha
    exact ((Set.ext_iff.1 hc a).1 ha).2

end InfoSys
end DomainTheory.InformationSystems
```

botElement_inf.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid33
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.inf
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.le_iff_inf_eq

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem botElement_inf (x : sys.Element) : sys.inf sys.botElement x = sys.botElement
    :=
  (sys.le_iff_inf_eq (x := sys.botElement) (y := x)).1 (botElement.le sys x)

end InfoSys
end DomainTheory.InformationSystems
```

Factoid41.lean

```
module

public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.le_iff_inf_eq

@[expose] public section

namespace DomainTheory.InformationSystems.InfoSys

set_option linter.unusedVariables false

theorem theorem_41.{u_1} : ∀ {α : Type u_1} [inst : DecidableEq α] (sys :
    @DomainTheory.InformationSystems.InfoSys α inst)
  {x y : @DomainTheory.InformationSystems.InfoSys.Element α inst sys},
  Iff
    (@LE.le (@DomainTheory.InformationSystems.InfoSys.Element α inst sys)
      (@Preorder.toLE (@DomainTheory.InformationSystems.InfoSys.Element α inst sys)
        (@PartialOrder.toPreorder (@DomainTheory.InformationSystems.InfoSys.Element α
    inst sys)
          (@DomainTheory.InformationSystems.InfoSys.instPartialOrderElement α inst sys
    )))
      x y)
    (@Eq (@DomainTheory.InformationSystems.InfoSys.Element α inst sys)
      (@DomainTheory.InformationSystems.InfoSys.inf α inst sys x y) x) :=
  @DomainTheory.InformationSystems.InfoSys.le_iff_inf_eq

end DomainTheory.InformationSystems.InfoSys
```

familyInfCarrier.lean

```
module

public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)
```

```
def familyInfCarrier (S : Set sys.Element) : Set α :=
  {a | ∀ x ∈ S, a ∈ x.carrier}

end InfoSys

end DomainTheory.InformationSystems
```

familyInf.lean

```
module

public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42.familyInfCarrier

@[expose] public section

namespace DomainTheory.InformationSystems
namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def familyInf (S : Set sys.Element) (hne : S.Nonempty) : sys.Element where
  carrier := sys.familyInfCarrier S
  consistent := by
    intro Y hY
    obtain ⟨x₀, hx₀⟩ := hne
    have hYx : (Y : Set α) ⊆ x₀.carrier := fun a ha => (hY ha) x₀ hx₀
    exact x₀.consistent Y hYx
  closed := by
    intro Y a hY hEnt x hx
    have hYx : (Y : Set α) ⊆ x.carrier := fun b hb => (hY hb) x hx
    exact x.closed Y a hYx hEnt

theorem familyInf.le (S : Set sys.Element) (hne : S.Nonempty) {x : sys.Element}
    (hx : x ∈ S) : sys.familyInf S hne ≤ x :=
  fun _a ha => ha x hx

end InfoSys
end DomainTheory.InformationSystems
```

le_inf.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid33
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.inf

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem le_inf {x y z : sys.Element} (hxy : x ≤ y) (hxz : x ≤ z) : x ≤ sys.inf y z :=
  fun _ ha => ⟨hxy ha, hxz ha⟩

end InfoSys
end DomainTheory.InformationSystems
```

inf_mono.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid33
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.inf
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.le_inf

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem inf_mono {x₁ x₂ y₁ y₂ : sys.Element} (hx : x₁ ≤ x₂) (hy : y₁ ≤ y₂) :
    sys.inf x₁ y₁ ≤ sys.inf x₂ y₂ :=
  sys.le_inf (le_trans (inf.le_left sys _ _) hx) (le_trans (inf.le_right sys _ _) hy)

end InfoSys
end DomainTheory.InformationSystems
```

inf_assoc.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid33
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.inf
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.le_inf

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem inf_assoc (x y z : sys.Element) : sys.inf (sys.inf x y) z = sys.inf x (sys.inf
    y z) := by
```

```
  refine le_antisymm ?_ ?_
  · refine sys.le_inf ?_ (sys.le_inf ?_ ?_)
    · exact le_trans (inf.le_left sys _ _) (inf.le_left sys _ _)
    · exact le_trans (inf.le_left sys _ _) (inf.le_right sys _ _)
    · exact inf.le_right sys _ _
  · refine sys.le_inf (sys.le_inf ?_ ?_) ?_
    · exact inf.le_left sys _ _
    · exact le_trans (inf.le_right sys _ _) (inf.le_left sys _ _)
    · exact le_trans (inf.le_right sys _ _) (inf.le_right sys _ _)

end InfoSys
end DomainTheory.InformationSystems
```

inf_comm.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid33
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.inf
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.le_inf

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem inf_comm (x y : sys.Element) : sys.inf x y = sys.inf y x := by
  refine le_antisymm ?_ ?_
  · exact sys.le_inf (inf.le_right sys x y) (inf.le_left sys x y)
  · exact sys.le_inf (inf.le_right sys y x) (inf.le_left sys y x)

end InfoSys
end DomainTheory.InformationSystems
```

le_familyInf.lean

```
module

public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42.familyInfCarrier
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42.familyInf

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys
```

```
variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem le_familyInf (S : Set sys.Element) (hne : S.Nonempty) {z : sys.Element}
    (h : ∀ x ∈ S, z ≤ x) : z ≤ sys.familyInf S hne :=
  fun _a ha x hx => h x hx ha

end InfoSys
end DomainTheory.InformationSystems
```

familyInf_le_iff.lean

```
module

public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42.familyInfCarrier
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42.familyInf
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42.le_familyInf

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem familyInf.le_iff (S : Set sys.Element) (hne : S.Nonempty) {z : sys.Element} :
    z ≤ sys.familyInf S hne ↔ ∀ x ∈ S, z ≤ x :=
  ⟨fun hz _x hx => le_trans hz (familyInf.le sys S hne hx), sys.le_familyInf S hne⟩

end InfoSys
end DomainTheory.InformationSystems
```

inf_le_iff.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid33
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.inf
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.le_inf

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)
```

```
theorem inf_le_iff {x y z : sys.Element} : z ≤ sys.inf x y ↔ z ≤ x ∧ z ≤ y :=
  ⟨fun h => ⟨le_trans h (inf.le_left sys x y), le_trans h (inf.le_right sys x y)⟩,
   fun ⟨hx, hy⟩ => sys.le_inf hx hy⟩

end InfoSys
end DomainTheory.InformationSystems
```

ApproximableMap.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35

@[expose] public section

universe u v

namespace DomainTheory.InformationSystems
namespace InfoSys

open DomainTheory.InformationSystems.Constructive

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

structure ApproximableMap (A : InfoSys α) (B : InfoSys β) where
  rel : Finset α → Finset β → Prop
  rel_dom : ∀ {u v}, rel u v → u ∈ A.Con
  rel_cod : ∀ {u v}, rel u v → v ∈ B.Con
  empty_rel : rel ∅ ∅
  union_right : ∀ {u v v'}, rel u v → rel u v' → rel u (v ∪' v')
  mono : ∀ {u u' v v'},
    rel u v → A.EntSet u' u → B.EntSet v v' → u' ∈ A.Con → v' ∈ B.Con → rel u' v'

end InfoSys
end DomainTheory.InformationSystems
```

closures_directed.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36.approxUnion
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36.
    closure_le_of_subset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive
```

```
namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem closures_directed (x : sys.Element) {u v : Finset α}
    (hu : u ∈ sys.Con) (hv : v ∈ sys.Con)
    (huX : ↑u ⊆ x.carrier) (hvX : ↑v ⊆ x.carrier) :
    ∃ (w : Finset α) (hw : w ∈ sys.Con),
      ↑w ⊆ x.carrier ∧
        sys.closure u hu ≤ sys.closure w hw ∧
        sys.closure v hv ≤ sys.closure w hw := by
  let w := u ∪' v
  have hwX : ↑w ⊆ x.carrier := by
    intro a ha
    rcases mem_funion.1 (Finset.mem_coe.1 ha) with h | h
    · exact huX (Finset.mem_coe.2 h)
    · exact hvX (Finset.mem_coe.2 h)
  have hw : w ∈ sys.Con := x.consistent w hwX
  refine ⟨w, hw, hwX, ?_, ?_⟩
  · exact sys.closure_le_of_subset hu hw (subset_funion_left u v)
  · exact sys.closure_le_of_subset hv hw (subset_funion_right u v)

end InfoSys
end DomainTheory.InformationSystems
```

SumEnt.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instDecidableEqSumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeLftInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeRhtInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.lftFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.rhtFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumCon

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

def SumEnt (u : Finset (SumToken α β)) (p : SumToken α β) : Prop :=
```

```
  SumCon A B u ∧
    match p with
    | .bot => True
    | .left x => lftFinset u = ∅ ∧ A.Ent (lftFinset u) x
    | .right y => rhtFinset u = ∅ ∧ B.Ent (rhtFinset u) y

end InfoSys

end DomainTheory.InformationSystems
```

sumSystem.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instDecidableEqSumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.sumBot
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeLftInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeRhtInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.lftFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.rhtFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumCon
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumEnt

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

def sumSystem : InfoSys (SumToken α β) where
  bot := sumBot
  Con := {u | SumCon A B u}
  Ent := SumEnt A B
  con_subset := by
    intro u v hu hv
    rcases hu with ⟨hl, hr⟩ | ⟨hl, hr⟩
    · exact Or.inl ⟨A.con_subset hl (lftFinset.mono hv),
        Finset.Subset.antisymm (by
          intro y hy
          have : y ∈ rhtFinset u := rhtFinset.mono hv hy
          rw [hr] at this
          exact False.elim (Finset.notMem_empty y this))
          (Finset.empty_subset _)⟩
```

```
  · exact Or.inr ⟨Finset.Subset.antisymm (by
        intro x hx
        have : x ∈ lftFinset u := lftFinset.mono hv hx
        rw [hl] at this
        exact False.elim (Finset.notMem_empty x this))
        (Finset.empty_subset _),
      B.con_subset hr (rhtFinset.mono hv)⟩
con_sing := by
  intro p
  cases p with
  | left x =>
    exact Or.inl ⟨by rw [lftFinset.singleton_left]; exact A.con_sing x,
      by
        ext y
        constructor
        · intro hy
          have : SumToken.right y ∈ ({.left x} : Finset _) := (mem_rhtFinset).1 hy
          exact False.elim (nomatch Finset.mem_singleton.mp this)
        · intro hy
          exact False.elim (Finset.notMem_empty y hy)⟩
  | right y =>
    exact Or.inr ⟨by
        ext x
        constructor
        · intro hx
          have : SumToken.left x ∈ ({.right y} : Finset _) := (mem_lftFinset).1 hx
          exact False.elim (nomatch Finset.mem_singleton.mp this)
        · intro hx
          exact False.elim (Finset.notMem_empty x hx),
      by rw [rhtFinset.singleton_right]; exact B.con_sing y⟩
  | bot =>
    exact Or.inl ⟨by rw [lftFinset.singleton_bot]; exact A.con_empty,
      rhtFinset.singleton_bot⟩
ent_con := by
  intro u p ⟨hu, hEnt⟩
  cases p with
  | bot =>
    rcases hu with ⟨hl, hr⟩ | ⟨hl, hr⟩
    · exact Or.inl ⟨by rw [lftFinset.insert_bot]; exact hl,
        by rw [rhtFinset.insert_bot]; exact hr⟩
    · exact Or.inr ⟨by rw [lftFinset.insert_bot]; exact hl,
        by rw [rhtFinset.insert_bot]; exact hr⟩
  | left x =>
    rcases hEnt with ⟨hne, hA⟩
    have hr : rhtFinset u = ∅ := SumCon.rht_empty_of_lft_nonempty A B hu hne
    exact Or.inl ⟨by
        rw [lftFinset.insert_left]
        exact A.ent_con hA,
      by rw [rhtFinset.insert_left]; exact hr⟩
  | right y =>
    rcases hEnt with ⟨hne, hB⟩
    have hl : lftFinset u = ∅ := SumCon.lft_empty_of_rht_nonempty A B hu hne
    exact Or.inr ⟨by rw [lftFinset.insert_right]; exact hl,
      by
        rw [rhtFinset.insert_right]
        exact B.ent_con hB⟩
```

```
  ent_bot := by
    intro u hu
    exact ⟨hu, trivial⟩
  ent_refl := by
    intro u p hu hp
    refine ⟨hu, ?_⟩
    cases p with
    | bot => exact trivial
    | left x =>
      have hx : x ∈ lftFinset u := (mem_lftFinset).2 hp
      have hne : lftFinset u = ∅ := Finset.ne_empty_of_mem hx
      exact ⟨hne, A.ent_refl (SumCon.lft_con_of_lft_nonempty A B hu hne) hx⟩
    | right y =>
      have hy : y ∈ rhtFinset u := (mem_rhtFinset).2 hp
      have hne : rhtFinset u = ∅ := Finset.ne_empty_of_mem hy
      exact ⟨hne, B.ent_refl (SumCon.rht_con_of_rht_nonempty A B hu hne) hy⟩
  ent_trans := by
    intro u v c hv hu hEnts hEntc
    refine ⟨hv, ?_⟩
    cases c with
    | bot => exact trivial
    | left x =>
      rcases hEntc with ⟨_, ⟨hne, hA⟩⟩
      have hlft : ∀ y ∈ lftFinset u, A.Ent (lftFinset v) y := by
        intro y hy
        have hp : SumToken.left y ∈ u := (mem_lftFinset).1 hy
        have hEy : SumEnt A B v (.left y) := hEnts _ hp
        exact hEy.2.2
      have hne' : lftFinset v = ∅ := by
        obtain ⟨y, hy⟩ := Finset.nonempty_of_ne_empty hne
        have hp : SumToken.left y ∈ u := (mem_lftFinset).1 hy
        exact (hEnts _ hp).2.1
      refine ⟨hne', ?_⟩
      exact A.ent_trans (SumCon.lft_con_of_lft_nonempty A B hv hne')
        (SumCon.lft_con_of_lft_nonempty A B hu hne) hlft hA
    | right y =>
      rcases hEntc with ⟨_, ⟨hne, hB⟩⟩
      have hrht : ∀ z ∈ rhtFinset u, B.Ent (rhtFinset v) z := by
        intro z hz
        have hp : SumToken.right z ∈ u := (mem_rhtFinset).1 hz
        have hEz : SumEnt A B v (.right z) := hEnts _ hp
        exact hEz.2.2
      have hne' : rhtFinset v = ∅ := by
        obtain ⟨z, hz⟩ := Finset.nonempty_of_ne_empty hne
        have hp : SumToken.right z ∈ u := (mem_rhtFinset).1 hz
        exact (hEnts _ hp).2.1
      refine ⟨hne', ?_⟩
      exact B.ent_trans (SumCon.rht_con_of_rht_nonempty A B hv hne')
        (SumCon.rht_con_of_rht_nonempty A B hu hne) hrht hB

end InfoSys

end DomainTheory.InformationSystems
```

SumCon_empty.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.sumBot
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.lftInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.rhtInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.lftFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.rhtFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumCon
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumEnt
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.sumSystem
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instDecidableEqSumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeLftInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeRhtInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    mem_foldr_lft
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    mem_foldr_rht

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

theorem SumCon_empty : SumCon A B (∅ : Finset (SumToken α β)) :=
  Or.inl ⟨by rw [lftFinset.empty]; exact A.con_empty, by rw [rhtFinset.empty]⟩

end InfoSys
end DomainTheory.InformationSystems
```

inf_idem.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid33
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.inf
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.le_iff_inf_eq

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem inf_idem (x : sys.Element) : sys.inf x x = x :=
  (sys.le_iff_inf_eq (y := x)).1 (le_refl x)

end InfoSys
end DomainTheory.InformationSystems
```

BasicInst7.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

instance (A : InfoSys α) (B : InfoSys β) : DecidableEq (FunToken A B) :=
  fun p q =>
    match decidableEq_finset p.val.1 q.val.1, decidableEq_finset p.val.2 q.val.2 with
    | isTrue h1, isTrue h2 => isTrue (Subtype.ext (Prod.ext h1 h2))
    | isFalse n1, _ =>
        isFalse fun h => n1 (congrArg (fun r : FunToken A B => r.val.1) h)
    | isTrue _, isFalse n2 =>
        isFalse fun h => n2 (congrArg (fun r : FunToken A B => r.val.2) h)

end InfoSys

end DomainTheory.InformationSystems
```

funBot.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunToken
```

```
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]
variable (A : InfoSys α) (B : InfoSys β)
universe u v

theorem funBot.property : (∅ : Finset α) ∈ A.Con ∧ (∅ : Finset β) ∈ B.Con :=
  ⟨A.con_empty, B.con_empty⟩

def funBot : FunToken A B :=
  ⟨(∅, ∅), funBot.property A B⟩

end InfoSys

end DomainTheory.InformationSystems
```

funion_comm'.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

theorem funion_comm' (a b : Finset β) : a ∪' b = b ∪' a := by
  ext x
  constructor
  · intro hx
    rcases mem_funion.mp hx with h | h
    · exact mem_funion.mpr (Or.inr h)
```

```
    · exact mem_funion.mpr (Or.inl h)
  · intro hx
    rcases mem_funion.mp hx with h | h
    · exact mem_funion.mpr (Or.inr h)
    · exact mem_funion.mpr (Or.inl h)

end InfoSys

end DomainTheory.InformationSystems
```

funion_left_comm'.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

theorem funion_left_comm' (a b c : Finset β) :
    a ∪' (b ∪' c) = b ∪' (a ∪' c) := by
  ext x
  constructor
  · intro hx
    rcases mem_funion.mp hx with h | h
    · exact mem_funion.mpr (Or.inr (mem_funion.mpr (Or.inl h)))
    · rcases mem_funion.mp h with h | h
      · exact mem_funion.mpr (Or.inl h)
      · exact mem_funion.mpr (Or.inr (mem_funion.mpr (Or.inr h)))
  · intro hx
    rcases mem_funion.mp hx with h | h
    · exact mem_funion.mpr (Or.inr (mem_funion.mpr (Or.inl h)))
    · rcases mem_funion.mp h with h | h
      · exact mem_funion.mpr (Or.inl h)
      · exact mem_funion.mpr (Or.inr (mem_funion.mpr (Or.inr h)))

end InfoSys

end DomainTheory.InformationSystems
```

funion_left_comm.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

theorem funion_left_comm (a b c : Finset α) :
    a ∪' (b ∪' c) = b ∪' (a ∪' c) := by
  ext x
  constructor
  · intro hx
    rcases mem_funion.mp hx with h | h
    · exact mem_funion.mpr (Or.inr (mem_funion.mpr (Or.inl h)))
    · rcases mem_funion.mp h with h | h
      · exact mem_funion.mpr (Or.inl h)
      · exact mem_funion.mpr (Or.inr (mem_funion.mpr (Or.inr h)))
  · intro hx
    rcases mem_funion.mp hx with h | h
    · exact mem_funion.mpr (Or.inr (mem_funion.mpr (Or.inl h)))
    · rcases mem_funion.mp h with h | h
      · exact mem_funion.mpr (Or.inl h)
      · exact mem_funion.mpr (Or.inr (mem_funion.mpr (Or.inr h)))

end InfoSys

end DomainTheory.InformationSystems
```

instLeftCommutativeFunInput.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunToken
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funion_left_comm
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

instance instLeftCommutativeFunInput :
    LeftCommutative fun p : FunToken A B => (funion p.val.1 : Finset α → Finset α) :=
  ⟨fun p q s => funion_left_comm p.val.1 q.val.1 s⟩

end InfoSys

end DomainTheory.InformationSystems
```

instLeftCommutativeFunOutput.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunToken
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funion_left_comm'
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunInput

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

instance instLeftCommutativeFunOutput :
    LeftCommutative fun p : FunToken A B => (funion p.val.2 : Finset β → Finset β) :=
  ⟨fun p q s => funion_left_comm' p.val.2 q.val.2 s⟩
```

```
end InfoSys

end DomainTheory.InformationSystems
```

mem_foldr_funOutput.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunToken
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunInput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunOutput

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

theorem mem_foldr_funOutput (t : Multiset (FunToken A B)) (y : β) :
    y ∈ Multiset.foldr (fun p : FunToken A B => funion p.val.2) (∅ : Finset β) t ↔
      ∃ p ∈ t, y ∈ p.val.2 := by
  refine Multiset.induction_on t ?_ ?_
  · constructor
    · intro hy
      exact False.elim (Finset.notMem_empty y hy)
    · rintro ⟨_, hp, _⟩
      exact False.elim (by cases hp)
  · intro p t ih
    simp only [Multiset.foldr_cons, mem_funion, ih, Multiset.mem_cons]
    constructor
    · rintro (hy | ⟨q, hq, hy⟩)
      · exact ⟨p, Or.inl rfl, hy⟩
      · exact ⟨q, Or.inr hq, hy⟩
    · rintro ⟨q, hq, hy⟩
      rcases hq with rfl | hq
      · exact Or.inl hy
      · exact Or.inr ⟨q, hq, hy⟩

end InfoSys
```

```
end DomainTheory.InformationSystems
```

mem_foldr_funInput.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunToken
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunInput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunOutput

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

theorem mem_foldr_funInput (t : Multiset (FunToken A B)) (x : α) :
    x ∈ Multiset.foldr (fun p : FunToken A B => funion p.val.1) (∅ : Finset α) t ↔
      ∃ p ∈ t, x ∈ p.val.1 := by
  refine Multiset.induction_on t ?_ ?_
  · constructor
    · intro hx
      exact False.elim (Finset.notMem_empty x hx)
    · rintro ⟨_, hp, _⟩
      exact False.elim (by cases hp)
  · intro p t ih
    simp only [Multiset.foldr_cons, mem_funion, ih, Multiset.mem_cons]
    constructor
    · rintro (hx | ⟨q, hq, hx⟩)
      · exact ⟨p, Or.inl rfl, hx⟩
      · exact ⟨q, Or.inr hq, hx⟩
    · rintro ⟨q, hq, hx⟩
      rcases hq with rfl | hq
      · exact Or.inl hx
      · exact Or.inr ⟨q, hq, hx⟩

end InfoSys

end DomainTheory.InformationSystems
```

funBot.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunToken
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunInput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunOutput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    mem_foldr_funInput
public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_ii

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]
variable (A : InfoSys α) (B : InfoSys β)
universe u v

def funInputUnion (s : Finset (FunToken A B)) : Finset α :=
  Multiset.foldr (fun p : FunToken A B => funion p.val.1) (∅ : Finset α) s.1

theorem funInputUnion.empty : funInputUnion A B (∅ : Finset (FunToken A B)) = ∅ :=
  rfl

theorem mem_funInputUnion {s : Finset (FunToken A B)} {x : α} :
    x ∈ funInputUnion A B s ↔ ∃ p ∈ s, x ∈ p.val.1 := by
  simpa [funInputUnion] using mem_foldr_funInput A B s.1 x

theorem entSet_inputUnion_of_ent {u' : Finset α} {s : Finset (FunToken A B)}
    (h : ∀ q ∈ s, A.EntSet u' q.val.1) :
    A.EntSet u' (funInputUnion A B s) := by
  intro x hx
  rcases (mem_funInputUnion A B).1 hx with ⟨q, hq, hx'⟩
  exact h q hq x hx'

theorem funInputUnion.con_of_ent {u' : Finset α} {s : Finset (FunToken A B)}
    (hu' : u' ∈ A.Con) (h : ∀ q ∈ s, A.EntSet u' q.val.1) :
    funInputUnion A B s ∈ A.Con :=
  A.con_subset (proposition_2_3_ii A hu' (entSet_inputUnion_of_ent A B h))
    (subset_funion_right _ _)

theorem funInputUnion.funion (s t : Finset (FunToken A B)) :
    funInputUnion A B (s ∪' t) = funInputUnion A B s ∪' funInputUnion A B t := by
```

```
  ext x
  constructor
  · intro hx
    rcases (mem_funInputUnion A B).1 hx with ⟨p, hp, hx'⟩
    rcases mem_funion.mp hp with hp | hp
    · exact mem_funion.mpr (Or.inl ((mem_funInputUnion A B).2 ⟨p, hp, hx'⟩))
    · exact mem_funion.mpr (Or.inr ((mem_funInputUnion A B).2 ⟨p, hp, hx'⟩))
  · intro hx
    rcases mem_funion.mp hx with hx | hx
    · rcases (mem_funInputUnion A B).1 hx with ⟨p, hp, hx'⟩
      exact (mem_funInputUnion A B).2 ⟨p, mem_funion.mpr (Or.inl hp), hx'⟩
    · rcases (mem_funInputUnion A B).1 hx with ⟨p, hp, hx'⟩
      exact (mem_funInputUnion A B).2 ⟨p, mem_funion.mpr (Or.inr hp), hx'⟩

theorem funInputUnion.singleton (p : FunToken A B) :
    funInputUnion A B {p} = p.val.1 := by
  ext x
  constructor
  · intro hx
    rcases (mem_funInputUnion A B).1 hx with ⟨q, hq, hx'⟩
    have : q = p := Finset.mem_singleton.mp hq
    subst this
    exact hx'
  · intro hx
    exact (mem_funInputUnion A B).2 ⟨p, Finset.mem_singleton_self p, hx⟩

theorem funInputUnion.insert (s : Finset (FunToken A B)) (p : FunToken A B) :
    funInputUnion A B (Insert.insert p s) = p.val.1 ∪' funInputUnion A B s := by
  have h : Insert.insert p s = ({p} : Finset (FunToken A B)) ∪' s := by
    ext q
    constructor
    · intro hq
      rcases Finset.mem_insert.mp hq with hqp | hq
      · exact mem_funion.mpr (Or.inl (hqp ▸ Finset.mem_singleton_self p))
      · exact mem_funion.mpr (Or.inr hq)
    · intro hq
      rcases mem_funion.mp hq with hq | hq
      · exact Finset.mem_insert.mpr (Or.inl (Finset.mem_singleton.mp hq))
      · exact Finset.mem_insert_of_mem hq
  rw [h, funInputUnion.funion, funInputUnion.singleton]

end InfoSys

end DomainTheory.InformationSystems
```

funion_comm.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

theorem funion_comm (a b : Finset α) : a ∪' b = b ∪' a := by
  ext x
  constructor
  · intro hx
    rcases mem_funion.mp hx with h | h
    · exact mem_funion.mpr (Or.inr h)
    · exact mem_funion.mpr (Or.inl h)
  · intro hx
    rcases mem_funion.mp hx with h | h
    · exact mem_funion.mpr (Or.inr h)
    · exact mem_funion.mpr (Or.inl h)

end InfoSys

end DomainTheory.InformationSystems
```

filter_ne_subset_of_subset_insert.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunToken
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunInput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunOutput

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v
```

```
variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

theorem filter_ne_subset_of_subset_insert {p : FunToken A B}
    {t w : Finset (FunToken A B)} (ht : t ⊆ insert p w) :
    t.filter (· = p) ⊆ w := by
  intro q hq
  have ⟨hqt, hne⟩ := Finset.mem_filter.mp hq
  have : q ∈ insert p w := ht hqt
  rcases Finset.mem_insert.mp this with rfl | hqW
  · exact False.elim (hne rfl)
  · exact hqW

end InfoSys

end DomainTheory.InformationSystems
```

funion_assoc'.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

theorem funion_assoc' (a b c : Finset β) :
    (a ∪' b) ∪' c = a ∪' (b ∪' c) := by
  ext x
  constructor
  · intro hx
    rcases mem_funion.mp hx with h | h
    · rcases mem_funion.mp h with h | h
      · exact mem_funion.mpr (Or.inl h)
      · exact mem_funion.mpr (Or.inr (mem_funion.mpr (Or.inl h)))
    · exact mem_funion.mpr (Or.inr (mem_funion.mpr (Or.inr h)))
  · intro hx
    rcases mem_funion.mp hx with h | h
```

```
    · exact mem_funion.mpr (Or.inl (mem_funion.mpr (Or.inl h)))
    · rcases mem_funion.mp h with h | h
      · exact mem_funion.mpr (Or.inl (mem_funion.mpr (Or.inr h)))
      · exact mem_funion.mpr (Or.inr h)

end InfoSys

end DomainTheory.InformationSystems
```

funion_assoc.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

theorem funion_assoc (a b c : Finset α) :
    (a ∪' b) ∪' c = a ∪' (b ∪' c) := by
  ext x
  constructor
  · intro hx
    rcases mem_funion.mp hx with h | h
    · rcases mem_funion.mp h with h | h
      · exact mem_funion.mpr (Or.inl h)
      · exact mem_funion.mpr (Or.inr (mem_funion.mpr (Or.inl h)))
    · exact mem_funion.mpr (Or.inr (mem_funion.mpr (Or.inr h)))
  · intro hx
    rcases mem_funion.mp hx with h | h
    · exact mem_funion.mpr (Or.inl (mem_funion.mpr (Or.inl h)))
    · rcases mem_funion.mp h with h | h
      · exact mem_funion.mpr (Or.inl (mem_funion.mpr (Or.inr h)))
      · exact mem_funion.mpr (Or.inr h)

end InfoSys

end DomainTheory.InformationSystems
```

funOutputUnion.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunToken
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunInput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunOutput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    mem_foldr_funOutput

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]
variable (A : InfoSys α) (B : InfoSys β)
universe u v

def funOutputUnion (s : Finset (FunToken A B)) : Finset β :=
  Multiset.foldr (fun p : FunToken A B => funion p.val.2) (∅ : Finset β) s.1

theorem funOutputUnion.empty : funOutputUnion A B (∅ : Finset (FunToken A B)) = ∅ :=
  rfl

theorem mem_funOutputUnion {s : Finset (FunToken A B)} {y : β} :
    y ∈ funOutputUnion A B s ↔ ∃ p ∈ s, y ∈ p.val.2 := by
  simpa [funOutputUnion] using mem_foldr_funOutput A B s.1 y

theorem funOutputUnion.funion (s t : Finset (FunToken A B)) :
    funOutputUnion A B (s ∪' t) = funOutputUnion A B s ∪' funOutputUnion A B t := by
  ext y
  constructor
  · intro hy
    rcases (mem_funOutputUnion A B).1 hy with ⟨p, hp, hy'⟩
    rcases mem_funion.mp hp with hp | hp
    · exact mem_funion.mpr (Or.inl ((mem_funOutputUnion A B).2 ⟨p, hp, hy'⟩))
    · exact mem_funion.mpr (Or.inr ((mem_funOutputUnion A B).2 ⟨p, hp, hy'⟩))
  · intro hy
    rcases mem_funion.mp hy with hy | hy
    · rcases (mem_funOutputUnion A B).1 hy with ⟨p, hp, hy'⟩
      exact (mem_funOutputUnion A B).2 ⟨p, mem_funion.mpr (Or.inl hp), hy'⟩
    · rcases (mem_funOutputUnion A B).1 hy with ⟨p, hp, hy'⟩
      exact (mem_funOutputUnion A B).2 ⟨p, mem_funion.mpr (Or.inr hp), hy'⟩

theorem funOutputUnion.singleton (p : FunToken A B) :
    funOutputUnion A B {p} = p.val.2 := by
  ext y
```

```
  constructor
  · intro hy
    rcases (mem_funOutputUnion A B).1 hy with ⟨q, hq, hy'⟩
    have : q = p := Finset.mem_singleton.mp hq
    subst this
    exact hy'
  · intro hy
    exact (mem_funOutputUnion A B).2 ⟨p, Finset.mem_singleton_self p, hy⟩

theorem funOutputUnion.insert (s : Finset (FunToken A B)) (p : FunToken A B) :
    funOutputUnion A B (Insert.insert p s) = p.val.2 ∪' funOutputUnion A B s := by
  have h : Insert.insert p s = ({p} : Finset (FunToken A B)) ∪' s := by
    ext q
    constructor
    · intro hq
      rcases Finset.mem_insert.mp hq with hqp | hq
      · exact mem_funion.mpr (Or.inl (hqp ▸ Finset.mem_singleton_self p))
      · exact mem_funion.mpr (Or.inr hq)
    · intro hq
      rcases mem_funion.mp hq with hq | hq
      · exact Finset.mem_insert.mpr (Or.inl (Finset.mem_singleton.mp hq))
      · exact Finset.mem_insert_of_mem hq
  rw [h, funOutputUnion.funion, funOutputUnion.singleton]

end InfoSys

end DomainTheory.InformationSystems
```

FunCon.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunToken
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunInput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunOutput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funInputUnion
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funOutputUnion

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys
```

```
universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

def FunCon (w : Finset (FunToken A B)) : Prop :=
  ∀ s ⊆ w, funInputUnion A B s ∈ A.Con → funOutputUnion A B s ∈ B.Con

end InfoSys

end DomainTheory.InformationSystems
```

exists_combined_witness.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunToken
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunInput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunOutput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funInputUnion
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funOutputUnion
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunCon

public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_ii
public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_iv
public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_v
public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_vi
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]
```

```
variable (A : InfoSys α) (B : InfoSys β)

theorem exists_combined_witness {u' : Finset α} {s : Finset (FunToken A B)}
    {v : Finset (FunToken A B)}
    (hv : FunCon A B v) (hu' : u' ∈ A.Con)
    (hEntIn : ∀ q ∈ s, A.EntSet u' q.val.1)
    (hWit : ∀ q ∈ s, ∃ s_q ⊆ v, (∀ r ∈ s_q, A.EntSet q.val.1 r.val.1) ∧
      B.EntSet (funOutputUnion A B s_q) q.val.2) :
    ∃ S ⊆ v, (∀ r ∈ S, A.EntSet u' r.val.1) ∧
      B.EntSet (funOutputUnion A B S) (funOutputUnion A B s) := by
  induction s using Finset.induction_on with
  | empty =>
    refine ⟨∅, Finset.empty_subset _, ?_, ?_⟩
    · intro _ hq
      exact False.elim (Finset.notMem_empty _ hq)
    · intro y hy
      exact False.elim (Finset.notMem_empty y hy)
  | insert q s' hqnot ih =>
    have hEntIn' : ∀ r ∈ s', A.EntSet u' r.val.1 := fun r hr =>
      hEntIn r (Finset.mem_insert_of_mem hr)
    have hWit' : ∀ r ∈ s', ∃ s_r ⊆ v, (∀ t ∈ s_r, A.EntSet r.val.1 t.val.1) ∧
        B.EntSet (funOutputUnion A B s_r) r.val.2 := fun r hr =>
      hWit r (Finset.mem_insert_of_mem hr)
    obtain ⟨S', hS'sub, hS'in, hS'out⟩ := ih hEntIn' hWit'
    obtain ⟨Sq, hSqsub, hSqin, hSqout⟩ := hWit q (Finset.mem_insert_self q s')
    refine ⟨S' ∪' Sq, funion_subset_iff.mpr ⟨hS'sub, hSqsub⟩, ?_, ?_⟩
    · intro r hr
      rcases mem_funion.mp hr with hr | hr
      · exact hS'in r hr
      · have hEnt_q : A.EntSet u' q.val.1 := hEntIn q (Finset.mem_insert_self q s')
        have hEnt_r : A.EntSet q.val.1 r.val.1 := hSqin r hr
        exact proposition_2_3_iv A hu' q.property.1 hEnt_q hEnt_r
    · rw [funOutputUnion.funion, funOutputUnion.insert]
      have hinS' : funInputUnion A B S' ∈ A.Con :=
        funInputUnion.con_of_ent A B hu' hS'in
      have houtS' : funOutputUnion A B S' ∈ B.Con := hv S' hS'sub hinS'
      have hinSq : funInputUnion A B Sq ∈ A.Con :=
        funInputUnion.con_of_ent A B q.property.1 hSqin
      have houtSq : funOutputUnion A B Sq ∈ B.Con := hv Sq hSqsub hinSq
      have hinUnion : funInputUnion A B (S' ∪' Sq) ∈ A.Con := by
        rw [funInputUnion.funion]
        have hEnt : A.EntSet u' (funInputUnion A B S' ∪' funInputUnion A B Sq) :=
          proposition_2_3_vi A
            (entSet_inputUnion_of_ent A B hS'in)
            (proposition_2_3_iv A hu' q.property.1
              (hEntIn q (Finset.mem_insert_self q s'))
              (entSet_inputUnion_of_ent A B hSqin))
        exact A.con_subset (proposition_2_3_ii A hu' hEnt) (subset_funion_right _ _)
      have houtUnion : funOutputUnion A B S' ∪' funOutputUnion A B Sq ∈ B.Con := by
        have : funOutputUnion A B (S' ∪' Sq) ∈ B.Con := hv _ (funion_subset_iff.mpr ⟨hS
  'sub, hSqsub⟩) hinUnion
        rwa [funOutputUnion.funion] at this
      have hEnt1 : B.EntSet (funOutputUnion A B S' ∪' funOutputUnion A B Sq)
          (funOutputUnion A B s') :=
        proposition_2_3_v B houtS' houtUnion (subset_funion_left _ _) hS'out
```

```
          (Finset.Subset.refl _)
      have hEnt2 : B.EntSet (funOutputUnion A B S' ∪' funOutputUnion A B Sq) q.val.2
    :=
        proposition_2_3_v B houtSq houtUnion (subset_funion_right _ _) hSqout
          (Finset.Subset.refl _)
      exact proposition_2_3_vi B hEnt2 hEnt1

end InfoSys

end DomainTheory.InformationSystems
```

FunEnt.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunToken
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunInput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunOutput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funOutputUnion
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunCon

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

def FunEnt (w : Finset (FunToken A B)) (p : FunToken A B) : Prop :=
  FunCon A B w ∧
    ∃ s ⊆ w, (∀ q ∈ s, A.EntSet p.val.1 q.val.1) ∧
      B.EntSet (funOutputUnion A B s) p.val.2

end InfoSys

end DomainTheory.InformationSystems
```

Sum.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.sumBot
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.lftInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.rhtInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.lftFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.rhtFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumCon
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.SumEnt
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.sumSystem
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instDecidableEqSumToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeLftInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    instLeftCommutativeRhtInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    mem_foldr_lft
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    mem_foldr_rht
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum.
    SumCon_empty

@[expose] public section
```

IsProdToken.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

class IsProdToken (A : InfoSys α) (B : InfoSys β) (p : α × β) : Prop where
  out : p.1 = A.bot ∨ p.2 = B.bot

end InfoSys

end DomainTheory.InformationSystems
```

BasicInst5.lean

```
module
```

```
public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    IsProdToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

instance (A : InfoSys α) (B : InfoSys β) (p : α × β) : Decidable (IsProdToken A B p)
    :=
  if h1 : p.1 = A.bot then isTrue ⟨Or.inl h1⟩
  else if h2 : p.2 = B.bot then isTrue ⟨Or.inr h2⟩
  else isFalse fun h => h.out.elim h1 h2

end InfoSys

end DomainTheory.InformationSystems
```

ProdToken.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    IsProdToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst5

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

def ProdToken (A : InfoSys α) (B : InfoSys β) : Type _ :=
  {p : α × β // IsProdToken A B p}

end InfoSys

end DomainTheory.InformationSystems
```

BasicInst7.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst5
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    ProdToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

instance instDecidableEqProdToken (A : InfoSys α) (B : InfoSys β) :
    DecidableEq (ProdToken A B) :=
  Subtype.instDecidableEq

end InfoSys

end DomainTheory.InformationSystems
```

instLeftCommutativeFstInsert.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst5
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    ProdToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst7

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

instance instLeftCommutativeFstInsert :
    LeftCommutative fun p : ProdToken A B => (insert p.val.1 : Finset α → Finset α) :=
  ⟨fun p q s => insert_comm' p.val.1 q.val.1 s⟩
```

```
end InfoSys

end DomainTheory.InformationSystems
```

instLeftCommutativeSndInsert.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst5
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    ProdToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst7
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeFstInsert

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

instance instLeftCommutativeSndInsert :
    LeftCommutative fun p : ProdToken A B => (insert p.val.2 : Finset β → Finset β) :=
  ⟨fun p q s => insert_comm' p.val.2 q.val.2 s⟩

end InfoSys

end DomainTheory.InformationSystems
```

mem_foldr_snd.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst5
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    ProdToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst7
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeFstInsert
```

```
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeSndInsert

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

theorem mem_foldr_snd (s : Multiset (ProdToken A B)) (y : β) :
    y ∈ Multiset.foldr (fun p : ProdToken A B => insert p.val.2) (∅ : Finset β) s ↔
      ∃ p ∈ s, p.val.2 = y := by
  refine Multiset.induction_on s ?_ ?_
  · constructor
    · intro hy
      exact False.elim (Finset.notMem_empty y hy)
    · rintro ⟨p, hp, _⟩
      exact False.elim (by cases hp)
  · intro p t ih
    simp only [Multiset.foldr_cons, Finset.mem_insert, ih, Multiset.mem_cons]
    constructor
    · rintro (hy | ⟨q, hq, hq2⟩)
      · exact ⟨p, Or.inl rfl, hy.symm⟩
      · exact ⟨q, Or.inr hq, hq2⟩
    · rintro ⟨q, hq, hq2⟩
      rcases hq with rfl | hq
      · exact Or.inl hq2.symm
      · exact Or.inr ⟨q, hq, hq2⟩

end InfoSys

end DomainTheory.InformationSystems
```

mem_foldr_fst.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst5
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    ProdToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst7
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeFstInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeSndInsert
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

theorem mem_foldr_fst (s : Multiset (ProdToken A B)) (x : α) :
    x ∈ Multiset.foldr (fun p : ProdToken A B => insert p.val.1) (∅ : Finset α) s ↔
      ∃ p ∈ s, p.val.1 = x := by
  refine Multiset.induction_on s ?_ ?_
  · constructor
    · intro hx
      exact False.elim (Finset.notMem_empty x hx)
    · rintro ⟨p, hp, _⟩
      exact False.elim (by cases hp)
  · intro p t ih
    simp only [Multiset.foldr_cons, Finset.mem_insert, ih, Multiset.mem_cons]
    constructor
    · rintro (hx | ⟨q, hq, hq1⟩)
      · exact ⟨p, Or.inl rfl, hx.symm⟩
      · exact ⟨q, Or.inr hq, hq1⟩
    · rintro ⟨q, hq, hq1⟩
      rcases hq with rfl | hq
      · exact Or.inl hq1.symm
      · exact Or.inr ⟨q, hq, hq1⟩

end InfoSys

end DomainTheory.InformationSystems
```

sndFinset.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst5
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    ProdToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst7
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeFstInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeSndInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    mem_foldr_snd
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]
variable (A : InfoSys α) (B : InfoSys β)

def sndFinset (u : Finset (ProdToken A B)) : Finset β :=
  Multiset.foldr (fun p : ProdToken A B => insert p.val.2) (∅ : Finset β)
    (u.filter (fun p => p.val.1 = A.bot)).1

theorem mem_sndFinset {u : Finset (ProdToken A B)} {y : β} :
    y ∈ sndFinset A B u ↔ ∃ p ∈ u, p.val.1 = A.bot ∧ p.val.2 = y := by
  unfold sndFinset
  rw [mem_foldr_snd]
  constructor
  · rintro ⟨p, hp, hy⟩
    have hp' := Finset.mem_filter.mp hp
    exact ⟨p, hp'.1, hp'.2, hy⟩
  · rintro ⟨p, hp, hbot, hy⟩
    exact ⟨p, Finset.mem_filter.mpr ⟨hp, hbot⟩, hy⟩

theorem sndFinset.empty : sndFinset A B (∅ : Finset (ProdToken A B)) = ∅ := by
  ext y
  constructor
  · intro hy
    rcases (mem_sndFinset A B).1 hy with ⟨_, hp, _, _⟩
    exact False.elim (Finset.notMem_empty _ hp)
  · intro hy
    exact False.elim (Finset.notMem_empty y hy)

theorem sndFinset.funion (u v : Finset (ProdToken A B)) :
    sndFinset A B (u ∪' v) = sndFinset A B u ∪' sndFinset A B v := by
  ext y
  constructor
  · intro hy
    rcases (mem_sndFinset A B).1 hy with ⟨p, hp, hbot, hy'⟩
    rcases mem_funion.mp hp with hp | hp
    · exact mem_funion.mpr (Or.inl ((mem_sndFinset A B).2 ⟨p, hp, hbot, hy'⟩))
    · exact mem_funion.mpr (Or.inr ((mem_sndFinset A B).2 ⟨p, hp, hbot, hy'⟩))
  · intro hy
    rcases mem_funion.mp hy with hy | hy
    · rcases (mem_sndFinset A B).1 hy with ⟨p, hp, hbot, hy'⟩
      exact (mem_sndFinset A B).2 ⟨p, mem_funion.mpr (Or.inl hp), hbot, hy'⟩
    · rcases (mem_sndFinset A B).1 hy with ⟨p, hp, hbot, hy'⟩
      exact (mem_sndFinset A B).2 ⟨p, mem_funion.mpr (Or.inr hp), hbot, hy'⟩

theorem sndFinset.insert_not_right (u : Finset (ProdToken A B)) (p : ProdToken A B)
    (hp : p.val.1 = A.bot) :
    sndFinset A B (insert p u) = sndFinset A B u := by
  ext y
```

```
  constructor
  · intro hy
    rcases (mem_sndFinset A B).1 hy with ⟨q, hq, hbot, hy'⟩
    rcases Finset.mem_insert.mp hq with rfl | hq
    · exact False.elim (hp hbot)
    · exact (mem_sndFinset A B).2 ⟨q, hq, hbot, hy'⟩
  · intro hy
    rcases (mem_sndFinset A B).1 hy with ⟨q, hq, hbot, hy'⟩
    exact (mem_sndFinset A B).2 ⟨q, Finset.mem_insert_of_mem hq, hbot, hy'⟩

theorem sndFinset.insert_right (u : Finset (ProdToken A B)) (p : ProdToken A B)
    (hp : p.val.1 = A.bot) :
    sndFinset A B (insert p u) = insert p.val.2 (sndFinset A B u) := by
  ext y
  constructor
  · intro hy
    rcases (mem_sndFinset A B).1 hy with ⟨q, hq, hbot, hy'⟩
    rcases Finset.mem_insert.mp hq with rfl | hq
    · exact Finset.mem_insert.mpr (Or.inl hy'.symm)
    · exact Finset.mem_insert.mpr (Or.inr ((mem_sndFinset A B).2 ⟨q, hq, hbot, hy'⟩))
  · intro hy
    rcases Finset.mem_insert.mp hy with hy' | hy'
    · exact (mem_sndFinset A B).2 ⟨p, Finset.mem_insert_self p u, hp, hy'.symm⟩
    · rcases (mem_sndFinset A B).1 hy' with ⟨q, hq, hbot, hyq⟩
      exact (mem_sndFinset A B).2 ⟨q, Finset.mem_insert_of_mem hq, hbot, hyq⟩

theorem sndFinset.mono {u v : Finset (ProdToken A B)} (h : v ⊆ u) :
    sndFinset A B v ⊆ sndFinset A B u := by
  intro y hy
  rcases (mem_sndFinset A B).1 hy with ⟨p, hp, hbot, hy'⟩
  exact (mem_sndFinset A B).2 ⟨p, h hp, hbot, hy'⟩

theorem sndFinset.singleton_right (p : ProdToken A B) (hp : p.val.1 = A.bot) :
    sndFinset A B {p} = {p.val.2} := by
  rw [show ({p} : Finset _) = insert p ∅ from rfl, sndFinset.insert_right A B ∅ p hp,
    sndFinset.empty]
  rfl

end InfoSys

end DomainTheory.InformationSystems
```

ext.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable.ApproximableMap

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

namespace ApproximableMap

variable {A : InfoSys α} {B : InfoSys β}

theorem ext {f g : ApproximableMap A B} (h : ∀ u v, f.rel u v ↔ g.rel u v) : f = g :=
    by
  obtain ⟨rf, _, _, _, _, _⟩ := f
  obtain ⟨rg, _, _, _, _, _⟩ := g
  have : rf = rg := by
    funext u v
    exact propext (h u v)
  subst this
  rfl

end ApproximableMap

end InfoSys

end DomainTheory.InformationSystems
```

singleton_funion_eq.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable.ApproximableMap
public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable.ext

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

namespace ApproximableMap

variable {A : InfoSys α} {B : InfoSys β}
```

```
theorem singleton_funion_eq (a : β) (s : Finset β) :
    ({a} : Finset β) ∪' s = insert a s := by
  ext x
  constructor
  · intro hx
    rcases mem_funion.mp hx with ha | hs
    · exact Finset.mem_insert.mpr (Or.inl (Finset.mem_singleton.mp ha))
    · exact Finset.mem_insert_of_mem hs
  · intro hx
    rcases Finset.mem_insert.mp hx with ha | hs
    · exact mem_funion.mpr (Or.inl (Finset.mem_singleton.mpr ha))
    · exact mem_funion.mpr (Or.inr hs)

end ApproximableMap

end InfoSys

end DomainTheory.InformationSystems
```

exists_rel_of_subset_image.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable.ApproximableMap
public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable.singleton_funion_eq

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

namespace ApproximableMap

variable {A : InfoSys α} {B : InfoSys β}

theorem exists_rel_of_subset_image (f : ApproximableMap A B) (x : A.Element)
    (Y : Finset β)
    (hY : ↑Y ⊆ ({Y : β | ∃ u : Finset α, ↑u ⊆ x.carrier ∧ f.rel u {Y}} : Set β)) :
    ∃ u : Finset α, ↑u ⊆ x.carrier ∧ f.rel u Y := by
  induction Y using Finset.induction_on with
  | empty =>
    refine ⟨∅, ?_, ?_⟩
    · intro a ha
      exact False.elim (Finset.notMem_empty a (Finset.mem_coe.1 ha))
```

```
    · exact f.mono f.empty_rel (A.entSet_empty ∅) (B.entSet_empty ∅) A.con_empty B.
    con_empty
  | insert a s _ha ih =>
    have ha' : ∃ u : Finset α, ↑u ⊆ x.carrier ∧ f.rel u {a} :=
      hY (Finset.mem_coe.2 (Finset.mem_insert_self a s))
    have hs' :
        ↑s ⊆ ({Y : β | ∃ u : Finset α, ↑u ⊆ x.carrier ∧ f.rel u {Y}} : Set β) := by
      intro b hb
      exact hY (Finset.mem_coe.2 (Finset.mem_insert_of_mem (Finset.mem_coe.1 hb)))
    obtain ⟨ua, hua, hrela⟩ := ha'
    obtain ⟨us, hus, hrels⟩ := ih hs'
    refine ⟨ua ∪' us, ?_, ?_⟩
    · intro z hz
      have hz' : z ∈ ua ∪' us := Finset.mem_coe.1 hz
      rcases mem_funion.mp hz' with h | h
      · exact hua (Finset.mem_coe.2 h)
      · exact hus (Finset.mem_coe.2 h)
    · have hUcon : ua ∪' us ∈ A.Con :=
        x.consistent (ua ∪' us) fun z hz => by
          rcases mem_funion.mp hz with h | h
          · exact hua (Finset.mem_coe.2 h)
          · exact hus (Finset.mem_coe.2 h)
      have hEnt_ua : A.EntSet (ua ∪' us) ua :=
        fun y hy => A.ent_refl hUcon (subset_funion_left ua us hy)
      have hEnt_us : A.EntSet (ua ∪' us) us :=
        fun y hy => A.ent_refl hUcon (subset_funion_right ua us hy)
      have h1 : f.rel (ua ∪' us) {a} :=
        f.mono hrela hEnt_ua
          (fun z hz => by
            rw [Finset.mem_singleton] at hz
            rw [hz]
            exact B.ent_refl (B.con_sing a) (Finset.mem_singleton_self a))
          hUcon (B.con_sing a)
      have h2 : f.rel (ua ∪' us) s :=
        f.mono hrels hEnt_us (proposition_2_3_iii B (f.rel_cod hrels))
          hUcon (f.rel_cod hrels)
      have hU : f.rel (ua ∪' us) ({a} ∪' s) := f.union_right h1 h2
      simpa [singleton_funion_eq] using hU

end ApproximableMap

end InfoSys

end DomainTheory.InformationSystems
```

toElement.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable.ApproximableMap
public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable.exists_rel_of_subset_image
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

namespace ApproximableMap

variable {A : InfoSys α} {B : InfoSys β}

def toElement (f : ApproximableMap A B) (x : A.Element) : B.Element where
  carrier := {Y | ∃ u : Finset α, ↑u ⊆ x.carrier ∧ f.rel u {Y}}
  consistent := by
    intro Y hY
    obtain ⟨u, _, hrel⟩ := exists_rel_of_subset_image f x Y hY
    exact f.rel_cod hrel
  closed := by
    intro Y a hY hEnt
    obtain ⟨u, hu, hrel⟩ := exists_rel_of_subset_image f x Y hY
    have harel : f.rel u {a} :=
      f.mono hrel (proposition_2_3_iii A (f.rel_dom hrel))
        (fun z hz => by
          rw [Finset.mem_singleton] at hz
          rw [hz]
          exact hEnt)
        (f.rel_dom hrel) (B.con_sing a)
    exact ⟨u, hu, harel⟩

end ApproximableMap

end InfoSys

end DomainTheory.InformationSystems
```

Basic.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable.ApproximableMap
public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable.toElement
public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable.ext
public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable.singleton_funion_eq
```

```
public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable.exists_rel_of_subset_image

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

namespace ApproximableMap

variable {A : InfoSys α} {B : InfoSys β}

@[simp] theorem mem_toElement (f : ApproximableMap A B) (x : A.Element) {Y : β} :
    Y ∈ (f.toElement x).carrier ↔ ∃ u : Finset α, ↑u ⊆ x.carrier ∧ f.rel u {Y} :=
  Iff.rfl
end ApproximableMap
end InfoSys

end DomainTheory.InformationSystems
```

toElement_mono.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

namespace ApproximableMap

variable {A : InfoSys α} {B : InfoSys β}

theorem toElement_mono (f : ApproximableMap A B) {x y : A.Element} (hxy : x ≤ y) :
    f.toElement x ≤ f.toElement y := by
  intro Y ⟨u, hu, hrel⟩
```

```
  exact ⟨u, fun z hz => hxy (hu hz), hrel⟩

end ApproximableMap
end InfoSys

end DomainTheory.InformationSystems
```

Approximable.lean

```
module

public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable.Basic
public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable.toElement_mono

@[expose] public section
```

closure_le_element.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36.approxUnion

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem closure_le_element (x : sys.Element) {u : Finset α} (hu : u ∈ sys.Con)
    (hsub : ↑u ⊆ x.carrier) : sys.closure u hu ≤ x := by
  intro a ha
  exact x.closed u a hsub ha

end InfoSys
end DomainTheory.InformationSystems
```

prodBot.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst5
```

```
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    ProdToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst7

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

def prodBot : ProdToken A B :=
  ⟨(A.bot, B.bot), ⟨Or.inl rfl⟩⟩

end InfoSys

end DomainTheory.InformationSystems
```

inf_botElement.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid33
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.inf
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.inf_comm
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.botElement_inf

@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem inf_botElement (x : sys.Element) : sys.inf x sys.botElement = sys.botElement
    := by
  rw [sys.inf_comm, sys.botElement_inf]

end InfoSys
end DomainTheory.InformationSystems
```

insert_filter_ne.lean

```
module
```

```
public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunToken
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunInput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunOutput

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u v

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

theorem insert_filter_ne {p : FunToken A B} {t : Finset (FunToken A B)}
    (hp : p ∈ t) : insert p (t.filter (· = p)) = t := by
  ext q
  constructor
  · intro hq
    rcases Finset.mem_insert.mp hq with rfl | hq
    · exact hp
    · exact (Finset.mem_filter.mp hq).1
  · intro hq
    if h : q = p then
      exact Finset.mem_insert.mpr (Or.inl h)
    else
      exact Finset.mem_insert.mpr (Or.inr (Finset.mem_filter.mpr ⟨hq, h⟩))

end InfoSys

end DomainTheory.InformationSystems
```

functionSystem.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunToken
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funBot
```

```
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunInput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunOutput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunCon
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunEnt
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    exists_combined_witness
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    filter_ne_subset_of_subset_insert
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funInputUnion
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funOutputUnion
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funion_assoc
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funion_assoc'
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funion_comm
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funion_comm'
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    insert_filter_ne
public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_ii
public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_iii
public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_iv
public import DomainTheory.InformationSystems.InformationSystems.Proposition23.
    proposition_2_3_v

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type u} {β : Type v} [DecidableEq α] [DecidableEq β]
variable (A : InfoSys α) (B : InfoSys β)
universe u v

theorem functionSystem.con_sing (p : FunToken A B) : FunCon A B {p} := by
  intro s hs _hin
  have hsub : funOutputUnion A B s ⊆ p.val.2 := by
    intro y hy
    rcases (mem_funOutputUnion A B).1 hy with ⟨q, hq, hy'⟩
    have hq' : q = p := Finset.mem_singleton.mp (hs hq)
    cases hq'
    exact hy'
  exact B.con_subset p.property.2 hsub
```

```
theorem functionSystem.con_subset {w w' : Finset (FunToken A B)}
    (hw : FunCon A B w) (hw' : w' ⊆ w) : FunCon A B w' :=
  fun s hs hin => hw s (fun _ hq => hw' (hs hq)) hin

theorem functionSystem.ent_bot {w : Finset (FunToken A B)} (hw : FunCon A B w) :
    FunEnt A B w (funBot A B) :=
  ⟨hw, ∅, Finset.empty_subset _,
    fun q hq => False.elim (Finset.notMem_empty q hq),
    fun y hy => False.elim (Finset.notMem_empty y hy)⟩

theorem functionSystem.ent_con {w : Finset (FunToken A B)} {p : FunToken A B}
    (hEnt : FunEnt A B w p) : FunCon A B (insert p w) := by
  obtain ⟨hw, s, hs, hEntIn, hEntOut⟩ := hEnt
  intro t ht hin
  if hp : p ∈ t then
    let t' := t.filter (· = p)
    have ht_eq : insert p t' = t := insert_filter_ne A B hp
    have ht'sub : t' ⊆ w := filter_ne_subset_of_subset_insert A B ht
    have hin' : p.val.1 ∪' funInputUnion A B t' ∈ A.Con := by
      rwa [← ht_eq, funInputUnion.insert] at hin
    have hsub : s ∪' t' ⊆ w := funion_subset_iff.mpr ⟨hs, ht'sub⟩
    have hEnt_in_s : A.EntSet p.val.1 (funInputUnion A B s) :=
      entSet_inputUnion_of_ent A B hEntIn
    have hEnt_big : A.EntSet (p.val.1 ∪' funInputUnion A B t') (funInputUnion A B s)
    :=
      proposition_2_3_v A p.property.1 hin' (subset_funion_left _ _) hEnt_in_s
        (Finset.Subset.refl _)
    have hbig : (p.val.1 ∪' funInputUnion A B t') ∪' funInputUnion A B s ∈ A.Con :=
      proposition_2_3_ii A hin' hEnt_big
    have hin_st' : funInputUnion A B s ∪' funInputUnion A B t' ∈ A.Con := by
      have heq :
          (p.val.1 ∪' funInputUnion A B t') ∪' funInputUnion A B s =
            p.val.1 ∪' (funInputUnion A B s ∪' funInputUnion A B t') := by
        rw [funion_assoc, funion_comm (funInputUnion A B t')]
      have hbig' : p.val.1 ∪' (funInputUnion A B s ∪' funInputUnion A B t') ∈ A.Con :=
     by
        rwa [heq] at hbig
      exact A.con_subset hbig' (subset_funion_right _ _)
    have hin_union : funInputUnion A B (s ∪' t') ∈ A.Con := by
      rwa [funInputUnion.funion]
    have hout_union : funOutputUnion A B s ∪' funOutputUnion A B t' ∈ B.Con := by
      have : funOutputUnion A B (s ∪' t') ∈ B.Con := hw _ hsub hin_union
      rwa [funOutputUnion.funion] at this
    have hout_s : funOutputUnion A B s ∈ B.Con :=
      B.con_subset hout_union (subset_funion_left _ _)
    have hEnt_out' : B.EntSet (funOutputUnion A B s ∪' funOutputUnion A B t') p.val.2
    :=
      proposition_2_3_v B hout_s hout_union (subset_funion_left _ _) hEntOut
        (Finset.Subset.refl _)
    have hfinal :
        (funOutputUnion A B s ∪' funOutputUnion A B t') ∪' p.val.2 ∈ B.Con :=
      proposition_2_3_ii B hout_union hEnt_out'
    have hout_t : p.val.2 ∪' funOutputUnion A B t' ∈ B.Con := by
      have heq :
          (funOutputUnion A B s ∪' funOutputUnion A B t') ∪' p.val.2 =
```

```
            funOutputUnion A B s ∪' (p.val.2 ∪' funOutputUnion A B t') := by
        rw [funion_assoc', funion_comm' (funOutputUnion A B t')]
      have hfinal' :
          funOutputUnion A B s ∪' (p.val.2 ∪' funOutputUnion A B t') ∈ B.Con := by
        rwa [heq] at hfinal
      exact B.con_subset hfinal' (subset_funion_right _ _)
    have : funOutputUnion A B t ∈ B.Con := by
      rwa [← ht_eq, funOutputUnion.insert]
    exact this
  else
    have ht' : t ⊆ w := by
      intro q hq
      have : q ∈ insert p w := ht hq
      rcases Finset.mem_insert.mp this with rfl | hqW
      · exact False.elim (hp hq)
      · exact hqW
    exact hw t ht' hin

theorem functionSystem.ent_refl {w : Finset (FunToken A B)} {p : FunToken A B}
    (hw : FunCon A B w) (hp : p ∈ w) : FunEnt A B w p :=
  ⟨hw, {p},
    fun q hq => by
      cases Finset.mem_singleton.mp hq
      exact hp,
    fun q hq => by
      cases Finset.mem_singleton.mp hq
      exact proposition_2_3_iii A p.property.1,
    by
      rw [funOutputUnion.singleton]
      exact proposition_2_3_iii B p.property.2⟩

theorem functionSystem.ent_trans {u v : Finset (FunToken A B)} {c : FunToken A B}
    (hv : FunCon A B v) (hu : FunCon A B u)
    (hEnts : ∀ y ∈ u, FunEnt A B v y) (hEnt : FunEnt A B u c) :
    FunEnt A B v c := by
  obtain ⟨_, s, hs, hEntIn, hEntOut⟩ := hEnt
  refine ⟨hv, ?_⟩
  have hWit : ∀ q ∈ s, ∃ s_q ⊆ v, (∀ r ∈ s_q, A.EntSet q.val.1 r.val.1) ∧
      B.EntSet (funOutputUnion A B s_q) q.val.2 := by
    intro q hq
    exact (hEnts q (hs hq)).2
  obtain ⟨S, hSsub, hSin, hSout⟩ :=
    exists_combined_witness A B hv c.property.1 hEntIn hWit
  refine ⟨S, hSsub, hSin, ?_⟩
  have hin_s : funInputUnion A B s ∈ A.Con :=
    funInputUnion.con_of_ent A B c.property.1 hEntIn
  have hout_s : funOutputUnion A B s ∈ B.Con := hu s hs hin_s
  have hin_S : funInputUnion A B S ∈ A.Con :=
    funInputUnion.con_of_ent A B c.property.1 hSin
  have hout_S : funOutputUnion A B S ∈ B.Con := hv S hSsub hin_S
  exact proposition_2_3_iv B hout_S hout_s hSout hEntOut

def functionSystem : InfoSys (FunToken A B) where
  bot := funBot A B
  Con := {w | FunCon A B w}
  Ent := FunEnt A B
```

```
  con_subset := functionSystem.con_subset A B
  con_sing := functionSystem.con_sing A B
  ent_con := functionSystem.ent_con A B
  ent_bot := functionSystem.ent_bot A B
  ent_refl := functionSystem.ent_refl A B
  ent_trans := functionSystem.ent_trans A B

end InfoSys

end DomainTheory.InformationSystems
```

FunctionSpace.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunToken
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funBot
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funInputUnion
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funOutputUnion
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunCon
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    FunEnt
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    functionSystem
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    BasicInst7
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funion_left_comm
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funion_left_comm'
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funion_assoc
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funion_comm
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funion_assoc'
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    funion_comm'
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunInput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    instLeftCommutativeFunOutput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    mem_foldr_funInput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    mem_foldr_funOutput
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
```

```
    insert_filter_ne
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    filter_ne_subset_of_subset_insert
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace.
    exists_combined_witness

@[expose] public section
```

familyInf_pair.lean

```
module

public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42.familyInfCarrier
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42.familyInf
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42.le_familyInf

public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.inf
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid41.le_inf
@[expose] public section

namespace DomainTheory.InformationSystems

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem familyInf_pair (x y : sys.Element) :
    sys.familyInf ({x, y} : Set sys.Element) ⟨x, Set.mem_insert x {y}⟩ = sys.inf x y :=
     by
  refine le_antisymm ?_ ?_
  · exact sys.le_inf
      (familyInf.le sys _ _ (Set.mem_insert x {y}))
      (familyInf.le sys _ _ (Set.mem_insert_of_mem _ rfl))
  · apply sys.le_familyInf
    intro z hz
    rcases Set.mem_insert_iff.mp hz with rfl | hy
    · exact inf.le_left sys _ _
    · have : z = y := hy
      subst this
      exact inf.le_right sys _ _

end InfoSys
end DomainTheory.InformationSystems
```

Factoid42.lean

```
module
```

```
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42.familyInf_pair

@[expose] public section

namespace DomainTheory.InformationSystems.InfoSys

set_option linter.unusedVariables false

theorem theorem_42.{u_1} : ∀ {α : Type u_1} [inst : DecidableEq α] (sys :
    @DomainTheory.InformationSystems.InfoSys α inst)
  (x y : @DomainTheory.InformationSystems.InfoSys.Element α inst sys),
  @Eq (@DomainTheory.InformationSystems.InfoSys.Element α inst sys)
    (@DomainTheory.InformationSystems.InfoSys.familyInf α inst sys
      (@Insert.insert (@DomainTheory.InformationSystems.InfoSys.Element α inst sys)
        (Set (@DomainTheory.InformationSystems.InfoSys.Element α inst sys))
        (@Set.instInsert (@DomainTheory.InformationSystems.InfoSys.Element α inst sys)
    ) x
        (@Singleton.singleton (@DomainTheory.InformationSystems.InfoSys.Element α inst
     sys)
          (Set (@DomainTheory.InformationSystems.InfoSys.Element α inst sys))
          (@Set.instSingletonSet (@DomainTheory.InformationSystems.InfoSys.Element α
    inst sys)) y))
      (@Exists.intro (@DomainTheory.InformationSystems.InfoSys.Element α inst sys)
        (fun (x_1 : @DomainTheory.InformationSystems.InfoSys.Element α inst sys) =>
          @Membership.mem (@DomainTheory.InformationSystems.InfoSys.Element α inst sys
    )
            (Set (@DomainTheory.InformationSystems.InfoSys.Element α inst sys))
            (@Set.instMembership (@DomainTheory.InformationSystems.InfoSys.Element α
    inst sys))
            (@Insert.insert (@DomainTheory.InformationSystems.InfoSys.Element α inst
    sys)
              (Set (@DomainTheory.InformationSystems.InfoSys.Element α inst sys))
              (@Set.instInsert (@DomainTheory.InformationSystems.InfoSys.Element α
    inst sys)) x
              (@Singleton.singleton (@DomainTheory.InformationSystems.InfoSys.Element
    α inst sys)
                (Set (@DomainTheory.InformationSystems.InfoSys.Element α inst sys))
                (@Set.instSingletonSet (@DomainTheory.InformationSystems.InfoSys.
    Element α inst sys)) y))
            x_1)
          x
          (@Set.mem_insert (@DomainTheory.InformationSystems.InfoSys.Element α inst sys)
     x
          (@Singleton.singleton (@DomainTheory.InformationSystems.InfoSys.Element α
    inst sys)
            (Set (@DomainTheory.InformationSystems.InfoSys.Element α inst sys))
            (@Set.instSingletonSet (@DomainTheory.InformationSystems.InfoSys.Element α
     inst sys)) y))))
    (@DomainTheory.InformationSystems.InfoSys.inf α inst sys x y) :=
  @DomainTheory.InformationSystems.InfoSys.familyInf_pair

end DomainTheory.InformationSystems.InfoSys
```

familyUnionCarrier.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def familyUnionCarrier (S : Set sys.Element) : Set α :=
  {a | ∃ x ∈ S, a ∈ x.carrier}

end InfoSys

end DomainTheory.InformationSystems
```

IsFinitelyConsistent.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def IsFinitelyConsistent (U : Set α) : Prop :=
  ∀ Y : Finset α, (Y : Set α) ⊆ U → Y ∈ sys.Con

end InfoSys

end DomainTheory.InformationSystems
```

exists_entSet_of_subset_deductive.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
```

```
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.IsFinitelyConsistent

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem exists_entSet_of_subset_deductive
    (U : Set α) (hU : sys.IsFinitelyConsistent U) (Y : Finset α)
    (hY : (Y : Set α) ⊆ {a | ∃ u : Finset α, (u : Set α) ⊆ U ∧ sys.Ent u a}) :
    ∃ w : Finset α, (w : Set α) ⊆ U ∧ sys.EntSet w Y := by
  induction Y using Finset.induction_on with
  | empty =>
    exact ⟨∅, fun _ ha => False.elim (Finset.notMem_empty _ (Finset.mem_coe.1 ha)),
      fun _ ha => False.elim (Finset.notMem_empty _ ha)⟩
  | insert a s _ha ih =>
    have ha' : ∃ u : Finset α, (u : Set α) ⊆ U ∧ sys.Ent u a :=
      hY (Finset.mem_coe.2 (Finset.mem_insert_self a s))
    have hs' : (s : Set α) ⊆ {b | ∃ u : Finset α, (u : Set α) ⊆ U ∧ sys.Ent u b} :=
    by
      intro b hb
      exact hY (Finset.mem_coe.2 (Finset.mem_insert_of_mem (Finset.mem_coe.1 hb)))
    obtain ⟨ua, hua, hEnta⟩ := ha'
    obtain ⟨us, hus, hEnts⟩ := ih hs'
    refine ⟨ua ∪' us, ?_, ?_⟩
    · intro z hz
      rcases mem_funion.mp (Finset.mem_coe.1 hz) with h | h
      · exact hua (Finset.mem_coe.2 h)
      · exact hus (Finset.mem_coe.2 h)
    · intro b hb
      have hwU : (ua ∪' us : Set α) ⊆ U := by
        intro z hz
        rcases mem_funion.mp (Finset.mem_coe.1 hz) with h | h
        · exact hua (Finset.mem_coe.2 h)
        · exact hus (Finset.mem_coe.2 h)
      have hw : ua ∪' us ∈ sys.Con := hU _ hwU
      rcases Finset.mem_insert.mp hb with rfl | hb'
      · exact sys.ent_trans hw (hU ua hua)
          (fun y hy => sys.ent_refl hw (mem_funion.mpr (Or.inl hy))) hEnta
      · exact sys.ent_trans hw (hU us hus)
          (fun y hy => sys.ent_refl hw (mem_funion.mpr (Or.inr hy))) (hEnts b hb')

end InfoSys

end DomainTheory.InformationSystems
```

deductiveClosure.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.IsFinitelyConsistent
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.exists_entSet_of_subset_deductive

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def deductiveClosure (U : Set α) (hU : sys.IsFinitelyConsistent U) : sys.Element where
  carrier := {a | ∃ u : Finset α, (u : Set α) ⊆ U ∧ sys.Ent u a}
  consistent := by
    intro Y hY
    obtain ⟨w, hwU, hEnt⟩ := sys.exists_entSet_of_subset_deductive U hU Y hY
    have hw : w ∈ sys.Con := hU w hwU
    exact sys.con_subset (proposition_2_3_ii sys hw hEnt) (subset_funion_right _ _)
  closed := by
    intro Y a hY hEnt
    obtain ⟨w, hwU, hEntY⟩ := sys.exists_entSet_of_subset_deductive U hU Y hY
    have hw : w ∈ sys.Con := hU w hwU
    have hYcon : Y ∈ sys.Con :=
      sys.con_subset (proposition_2_3_ii sys hw hEntY) (subset_funion_right _ _)
    exact ⟨w, hwU, sys.ent_trans hw hYcon hEntY hEnt⟩

end InfoSys

end DomainTheory.InformationSystems
```

join.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.IsFinitelyConsistent
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.deductiveClosure

@[expose] public section
```

```
namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def join (x y : sys.Element)
    (h : sys.IsFinitelyConsistent (x.carrier ∪ y.carrier)) : sys.Element :=
  sys.deductiveClosure (x.carrier ∪ y.carrier) h

theorem join.le (x y z : sys.Element)
    (h : sys.IsFinitelyConsistent (x.carrier ∪ y.carrier))
    (hx : x ≤ z) (hy : y ≤ z) : sys.join x y h ≤ z := by
  intro a ha
  obtain ⟨u, huU, hEnt⟩ := ha
  have huZ : (u : Set α) ⊆ z.carrier := by
    intro b hb
    rcases huU hb with hb' | hb'
    · exact hx hb'
    · exact hy hb'
  exact z.closed u a huZ hEnt

end InfoSys

end DomainTheory.InformationSystems
```

familySup.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.IsFinitelyConsistent
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.deductiveClosure
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familyUnionCarrier

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def familySup (S : Set sys.Element)
```

```
    (hU : sys.IsFinitelyConsistent (sys.familyUnionCarrier S)) : sys.Element :=
  sys.deductiveClosure (sys.familyUnionCarrier S) hU

theorem familySup.le (S : Set sys.Element)
    (hU : sys.IsFinitelyConsistent (sys.familyUnionCarrier S)) {z : sys.Element}
    (h : ∀ x ∈ S, x ≤ z) : sys.familySup S hU ≤ z := by
  intro a ha
  obtain ⟨u, huU, hEnt⟩ := ha
  have huZ : (u : Set α) ⊆ z.carrier := by
    intro b hb
    obtain ⟨x, hx, hb'⟩ := huU hb
    exact h x hx hb'
  exact z.closed u a huZ hEnt

end InfoSys

end DomainTheory.InformationSystems
```

finitelyConsistent_of_upperBound.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.IsFinitelyConsistent
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.deductiveClosure
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familyUnionCarrier
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familySup
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.join
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.exists_entSet_of_subset_deductive

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem finitelyConsistent_of_upperBound (S : Set sys.Element) {z : sys.Element}
    (h : ∀ x ∈ S, x ≤ z) : sys.IsFinitelyConsistent (sys.familyUnionCarrier S) := by
  intro Y hY
  have hYZ : (Y : Set α) ⊆ z.carrier := by
    intro a ha
    obtain ⟨x, hx, ha'⟩ := hY ha
```

```
    exact h x hx ha'
  exact z.consistent Y hYZ

end InfoSys
end DomainTheory.InformationSystems
```

subset_deductiveClosure.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.IsFinitelyConsistent
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.deductiveClosure
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familyUnionCarrier
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familySup
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.join
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.exists_entSet_of_subset_deductive

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem subset_deductiveClosure (U : Set α) (hU : sys.IsFinitelyConsistent U) :
    U ⊆ (sys.deductiveClosure U hU).carrier := by
  intro a ha
  refine ⟨{a}, ?_, sys.ent_refl (hU {a} ?_) (Finset.mem_singleton_self a)⟩
  · intro b hb
    have : b = a := Finset.mem_singleton.mp (Finset.mem_coe.1 hb)
    subst this
    exact ha
  · intro b hb
    have : b = a := Finset.mem_singleton.mp (Finset.mem_coe.1 hb)
    subst this
    exact ha

end InfoSys
end DomainTheory.InformationSystems
```

le_join_right.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.IsFinitelyConsistent
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.deductiveClosure
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familyUnionCarrier
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familySup
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.join
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.exists_entSet_of_subset_deductive
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.subset_deductiveClosure

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem le_join_right (x y : sys.Element)
    (h : sys.IsFinitelyConsistent (x.carrier ∪ y.carrier)) : y ≤ sys.join x y h :=
  fun _a ha => sys.subset_deductiveClosure _ h (Or.inr ha)

end InfoSys
end DomainTheory.InformationSystems
```

le_familySup.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.IsFinitelyConsistent
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.deductiveClosure
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familyUnionCarrier
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familySup
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
```

```
    Factoid43.join
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.exists_entSet_of_subset_deductive
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.subset_deductiveClosure

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem le_familySup (S : Set sys.Element)
    (hU : sys.IsFinitelyConsistent (sys.familyUnionCarrier S)) {x : sys.Element}
    (hx : x ∈ S) : x ≤ sys.familySup S hU := by
  intro a ha
  exact sys.subset_deductiveClosure _ hU ⟨x, hx, ha⟩

end InfoSys
end DomainTheory.InformationSystems
```

exists_isLUB_iff.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.IsFinitelyConsistent
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.deductiveClosure
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familyUnionCarrier
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familySup
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.join
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.exists_entSet_of_subset_deductive
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.le_familySup
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.finitelyConsistent_of_upperBound

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive
```

```
namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem exists_isLUB_iff (S : Set sys.Element) :
    (∃ z : sys.Element, (∀ x ∈ S, x ≤ z) ∧ ∀ w, (∀ x ∈ S, x ≤ w) → z ≤ w) ↔
      Nonempty (sys.IsFinitelyConsistent (sys.familyUnionCarrier S)) := by
  constructor
  · rintro ⟨z, hub, _⟩
    exact ⟨sys.finitelyConsistent_of_upperBound S hub⟩
  · rintro ⟨hU⟩
    refine ⟨sys.familySup S hU, fun x hx => sys.le_familySup S hU hx,
      fun w hw => familySup.le sys S hU hw⟩

end InfoSys
end DomainTheory.InformationSystems
```

le_join_left.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.IsFinitelyConsistent
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.deductiveClosure
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familyUnionCarrier
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familySup
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.join
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.exists_entSet_of_subset_deductive
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.subset_deductiveClosure

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem le_join_left (x y : sys.Element)
    (h : sys.IsFinitelyConsistent (x.carrier ∪ y.carrier)) : x ≤ sys.join x y h :=
  fun _a ha => sys.subset_deductiveClosure _ h (Or.inl ha)
```

```
end InfoSys
end DomainTheory.InformationSystems
```

exists_join_iff.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid35
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid42
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.IsFinitelyConsistent
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.deductiveClosure
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familyUnionCarrier
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familySup
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.join
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.exists_entSet_of_subset_deductive
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.le_join_left
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.le_join_right

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem exists_join_iff (x y : sys.Element) :
    (∃ z : sys.Element, x ≤ z ∧ y ≤ z) ↔
      Nonempty (sys.IsFinitelyConsistent (x.carrier ∪ y.carrier)) := by
  constructor
  · rintro ⟨z, hx, hy⟩
    exact ⟨fun Y hY => z.consistent Y (fun a ha => by
      rcases hY ha with h | h
      · exact hx h
      · exact hy h)⟩
  · rintro ⟨h⟩
    exact ⟨sys.join x y h, sys.le_join_left x y h, sys.le_join_right x y h⟩

end InfoSys
end DomainTheory.InformationSystems
```

Factoid43.lean

```
module

public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.exists_join_iff

@[expose] public section

namespace DomainTheory.InformationSystems.InfoSys

set_option linter.unusedVariables false

theorem theorem_43.{u_1} : ∀ {α : Type u_1} [inst : DecidableEq α] (sys :
    @DomainTheory.InformationSystems.InfoSys α inst)
  (x y : @DomainTheory.InformationSystems.InfoSys.Element α inst sys),
  Iff
    (∃ (z : @DomainTheory.InformationSystems.InfoSys.Element α inst sys),
      And
        (@LE.le (@DomainTheory.InformationSystems.InfoSys.Element α inst sys)
          (@Preorder.toLE (@DomainTheory.InformationSystems.InfoSys.Element α inst sys
    )
            (@PartialOrder.toPreorder (@DomainTheory.InformationSystems.InfoSys.
    Element α inst sys)
              (@DomainTheory.InformationSystems.InfoSys.instPartialOrderElement α inst
     sys)))
          x z)
        (@LE.le (@DomainTheory.InformationSystems.InfoSys.Element α inst sys)
          (@Preorder.toLE (@DomainTheory.InformationSystems.InfoSys.Element α inst sys
    )
            (@PartialOrder.toPreorder (@DomainTheory.InformationSystems.InfoSys.
    Element α inst sys)
              (@DomainTheory.InformationSystems.InfoSys.instPartialOrderElement α inst
     sys)))
          y z))
    (Nonempty
      (@DomainTheory.InformationSystems.InfoSys.IsFinitelyConsistent α inst sys
        (@Union.union (Set α) (@Set.instUnion α) (@DomainTheory.InformationSystems.
    InfoSys.Element.carrier α inst sys x)
          (@DomainTheory.InformationSystems.InfoSys.Element.carrier α inst sys y))))
    :=
  @DomainTheory.InformationSystems.InfoSys.exists_join_iff

end DomainTheory.InformationSystems.InfoSys
```

Chain.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

class Chain (S : Set sys.Element) : Prop where
  out : ∀ (x y : sys.Element), x ∈ S → y ∈ S → x ≤ y ∨ y ≤ x

end InfoSys

end DomainTheory.InformationSystems
```

IsDirected.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.Chain

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def IsDirected (S : Set sys.Element) : Prop :=
  ∀ (x y : sys.Element), x ∈ S → y ∈ S → ∃ z ∈ S, x ≤ z ∧ y ≤ z

theorem IsDirected.of_IsChain {S : Set sys.Element} (h : sys.Chain S) : sys.IsDirected
     S := by
  intro x y hx hy
  rcases h.out x y hx hy with hxy | hyx
  · exact ⟨y, hy, hxy, le_rfl⟩
  · exact ⟨x, hx, le_rfl, hyx⟩

end InfoSys

end DomainTheory.InformationSystems
```

exists_mem_of_subset_directedUnion.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43
```

```
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.IsDirected

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem exists_mem_of_subset_directedUnion (S : Set sys.Element) (hne : S.Nonempty)
    (hdir : sys.IsDirected S) (Y : Finset α)
    (hY : (Y : Set α) ⊆ sys.familyUnionCarrier S) :
    ∃ z ∈ S, (Y : Set α) ⊆ z.carrier := by
  induction Y using Finset.induction_on with
  | empty =>
    obtain ⟨z, hz⟩ := hne
    exact ⟨z, hz, fun _ ha => False.elim (Finset.notMem_empty _ (Finset.mem_coe.1 ha))⟩
  | insert a s _ha ih =>
    have ha' : ∃ x ∈ S, a ∈ x.carrier :=
      hY (Finset.mem_coe.2 (Finset.mem_insert_self a s))
    have hs' : (s : Set α) ⊆ sys.familyUnionCarrier S := by
      intro b hb
      exact hY (Finset.mem_coe.2 (Finset.mem_insert_of_mem (Finset.mem_coe.1 hb)))
    obtain ⟨xa, hxa, haS⟩ := ha'
    obtain ⟨xs, hxs, hsS⟩ := ih hs'
    obtain ⟨z, hz, hxa_le, hxs_le⟩ := hdir xa xs hxa hxs
    refine ⟨z, hz, ?_⟩
    intro b hb
    rcases Finset.mem_insert.mp (Finset.mem_coe.1 hb) with rfl | hb'
    · exact hxa_le haS
    · exact hxs_le (hsS (Finset.mem_coe.2 hb'))

end InfoSys

end DomainTheory.InformationSystems
```

finitelyConsistent_of_directed.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.IsDirected
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.exists_mem_of_subset_directedUnion

@[expose] public section
```

```
namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem finitelyConsistent_of_directed (S : Set sys.Element) (hne : S.Nonempty)
    (hdir : sys.IsDirected S) :
    sys.IsFinitelyConsistent (sys.familyUnionCarrier S) := by
  intro Y hY
  obtain ⟨z, _hz, hYZ⟩ := sys.exists_mem_of_subset_directedUnion S hne hdir Y hY
  exact z.consistent Y hYZ

end InfoSys

end DomainTheory.InformationSystems
```

directedSup.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.IsDirected
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.finitelyConsistent_of_directed
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.familySup

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def directedSup (S : Set sys.Element) (hne : S.Nonempty) (hdir : sys.IsDirected S) :
    sys.Element :=
  sys.familySup S (sys.finitelyConsistent_of_directed S hne hdir)

theorem directedSup.carrier_eq_union (S : Set sys.Element) (hne : S.Nonempty)
    (hdir : sys.IsDirected S) :
    (sys.directedSup S hne hdir).carrier = sys.familyUnionCarrier S := by
  let hU := sys.finitelyConsistent_of_directed S hne hdir
  refine Set.Subset.antisymm ?_ (sys.subset_deductiveClosure _ hU)
  intro a ha
  obtain ⟨u, huU, hEnt⟩ := (ha : a ∈ (sys.deductiveClosure _ hU).carrier)
  obtain ⟨z, hz, huZ⟩ := sys.exists_mem_of_subset_directedUnion S hne hdir u huU
```

```
  exact ⟨z, hz, z.closed u a huZ hEnt⟩

theorem directedSup.le (S : Set sys.Element) (hne : S.Nonempty) (hdir : sys.IsDirected
     S)
    {z : sys.Element} (h : ∀ x ∈ S, x ≤ z) : sys.directedSup S hne hdir ≤ z :=
  familySup.le sys S (sys.finitelyConsistent_of_directed S hne hdir) h

end InfoSys

end DomainTheory.InformationSystems
```

chainSup.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.Chain
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.IsDirected
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.directedSup

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def chainSup (S : Set sys.Element) (hne : S.Nonempty) (hchain : sys.Chain S) : sys.
    Element :=
  sys.directedSup S hne (IsDirected.of_IsChain sys hchain)

end InfoSys

end DomainTheory.InformationSystems
```

le_directedSup.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.IsDirected
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.Chain
```

```
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.directedSup
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.chainSup
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.exists_mem_of_subset_directedUnion
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.finitelyConsistent_of_directed

public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid43.le_familySup
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem le_directedSup (S : Set sys.Element) (hne : S.Nonempty) (hdir : sys.IsDirected
     S)
    {x : sys.Element} (hx : x ∈ S) : x ≤ sys.directedSup S hne hdir :=
  sys.le_familySup S (sys.finitelyConsistent_of_directed S hne hdir) hx

end InfoSys
end DomainTheory.InformationSystems
```

Factoid44.lean

```
module

public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.directedSup

@[expose] public section

namespace DomainTheory.InformationSystems.InfoSys

set_option linter.unusedVariables false

theorem theorem_44.{u_1} : ∀ {α : Type u_1} [inst : DecidableEq α] (sys :
    @DomainTheory.InformationSystems.InfoSys α inst)
  (S : Set (@DomainTheory.InformationSystems.InfoSys.Element α inst sys))
  (hne : @Set.Nonempty (@DomainTheory.InformationSystems.InfoSys.Element α inst sys) S
    )
  (hdir : @DomainTheory.InformationSystems.InfoSys.IsDirected α inst sys S),
  @Eq (Set α)
    (@DomainTheory.InformationSystems.InfoSys.Element.carrier α inst sys
      (@DomainTheory.InformationSystems.InfoSys.directedSup α inst sys S hne hdir))
    (@DomainTheory.InformationSystems.InfoSys.familyUnionCarrier α inst sys S) :=
  @DomainTheory.InformationSystems.InfoSys.directedSup.carrier_eq_union

end DomainTheory.InformationSystems.InfoSys
```

finiteApproximants.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

def finiteApproximants (x : sys.Element) : Set sys.Element :=
  {y | ∃ (u : Finset α) (hu : u ∈ sys.Con), ↑u ⊆ x.carrier ∧ y = sys.closure u hu}

end InfoSys

end DomainTheory.InformationSystems
```

compact_closure.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45.finiteApproximants

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36.
    closure_le_element
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem compact_closure (S : Set sys.Element) (hne : S.Nonempty) (hdir : sys.
    IsDirected S)
    {u : Finset α} (hu : u ∈ sys.Con)
    (hle : sys.closure u hu ≤ sys.directedSup S hne hdir) :
    ∃ z ∈ S, sys.closure u hu ≤ z := by
  have huU : (u : Set α) ⊆ sys.familyUnionCarrier S := by
    intro a ha
```

```
    have : a ∈ (sys.directedSup S hne hdir).carrier :=
      hle (sys.subset_closure hu (Finset.mem_coe.2 ha))
    rwa [directedSup.carrier_eq_union sys S hne hdir] at this
  obtain ⟨z, hz, huZ⟩ := sys.exists_mem_of_subset_directedUnion S hne hdir u huU
  exact ⟨z, hz, sys.closure_le_element z hu huZ⟩

end InfoSys
end DomainTheory.InformationSystems
```

botElement_eq_closure_empty.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45.finiteApproximants

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem botElement_eq_closure_empty :
    sys.botElement = sys.closure (∅ : Finset α) sys.con_empty := by
  refine le_antisymm ?_ ?_
  · intro a ha

    exact sys.ent_trans sys.con_empty (sys.con_sing sys.bot)
      (fun y hy => by
        have : y = sys.bot := Finset.mem_singleton.mp hy
        subst this
        exact sys.ent_bot sys.con_empty)
      ha
  · intro a ha

    exact sys.ent_trans (sys.con_sing sys.bot) sys.con_empty
      (fun _ hy => False.elim (Finset.notMem_empty _ hy)) ha

end InfoSys
end DomainTheory.InformationSystems
```

nonempty_finiteApproximants.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36
```

```
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45.finiteApproximants
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45.botElement_eq_closure_empty

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem nonempty_finiteApproximants (x : sys.Element) :
    (sys.finiteApproximants x).Nonempty := by
  refine ⟨sys.botElement, ∅, sys.con_empty, ?_, sys.botElement_eq_closure_empty⟩
  intro a ha
  exact False.elim (Finset.notMem_empty _ (Finset.mem_coe.1 ha))

end InfoSys
end DomainTheory.InformationSystems
```

directed_finiteApproximants.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45.finiteApproximants

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36.
    closures_directed
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem directed_finiteApproximants (x : sys.Element) :
    sys.IsDirected (sys.finiteApproximants x) := by
  intro y₁ y₂ hy₁ hy₂
  obtain ⟨u, hu, huX, rfl⟩ := hy₁
  obtain ⟨v, hv, hvX, rfl⟩ := hy₂
  obtain ⟨w, hw, hwX, huw, hvw⟩ := sys.closures_directed x hu hv huX hvX
```

```
  exact ⟨sys.closure w hw, ⟨w, hw, hwX, rfl⟩, huw, hvw⟩

end InfoSys
end DomainTheory.InformationSystems
```

eq_directedSup_finiteApproximants.lean

```
module

public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45.finiteApproximants
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45.nonempty_finiteApproximants
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45.directed_finiteApproximants

public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.directedSup
public import DomainTheory.InformationSystems.ElementsOfASystem.Factoid36.
    closure_le_element
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α] (sys : InfoSys α)

theorem eq_directedSup_finiteApproximants (x : sys.Element) :
    x = sys.directedSup (sys.finiteApproximants x)
      (sys.nonempty_finiteApproximants x) (sys.directed_finiteApproximants x) := by
  refine le_antisymm ?_ ?_
  ·
    intro a ha
    have : a ∈ sys.approxUnion x := (sys.mem_element_iff_mem_closure x a).1 ha
    obtain ⟨u, hu, huX, ha'⟩ := this
    rw [directedSup.carrier_eq_union sys]
    exact ⟨sys.closure u hu, ⟨u, hu, huX, rfl⟩, ha'⟩
  ·
    apply directedSup.le sys
    intro y hy
    obtain ⟨u, hu, huX, rfl⟩ := hy
    exact sys.closure_le_element x hu huX

end InfoSys
end DomainTheory.InformationSystems
```

Factoid45.lean

```
module

public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45.eq_directedSup_finiteApproximants

@[expose] public section

namespace DomainTheory.InformationSystems.InfoSys

set_option linter.unusedVariables false

theorem theorem_45.{u_1} : ∀ {α : Type u_1} [inst : DecidableEq α] (sys :
    @DomainTheory.InformationSystems.InfoSys α inst)
  (x : @DomainTheory.InformationSystems.InfoSys.Element α inst sys),
  @Eq (@DomainTheory.InformationSystems.InfoSys.Element α inst sys) x
    (@DomainTheory.InformationSystems.InfoSys.directedSup α inst sys
      (@DomainTheory.InformationSystems.InfoSys.finiteApproximants α inst sys x)
      (@DomainTheory.InformationSystems.InfoSys.nonempty_finiteApproximants α inst sys
     x)
      (@DomainTheory.InformationSystems.InfoSys.directed_finiteApproximants α inst sys
     x)) :=
  @DomainTheory.InformationSystems.InfoSys.eq_directedSup_finiteApproximants

end DomainTheory.InformationSystems.InfoSys
```

ScottContinuous.lean

```
module

public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45

@[expose] public section

namespace DomainTheory.InformationSystems
namespace InfoSys

open DomainTheory.InformationSystems.Constructive

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

theorem nonempty_image {X Y : Type*} {S : Set X} (hne : S.Nonempty) (f : X → Y) :
    (f '' S).Nonempty :=
  hne.image f

theorem directed_image {A : InfoSys α} {B : InfoSys β} {S : Set A.Element}
    (hdir : A.IsDirected S) (f : A.Element → B.Element)
    (hmono : ∀ {x y}, x ≤ y → f x ≤ f y) : B.IsDirected (f '' S) := by
  intro x y hx hy
  obtain ⟨x₀, hx₀, rfl⟩ := hx
  obtain ⟨y₀, hy₀, rfl⟩ := hy
  obtain ⟨z₀, hz₀, hxz, hyz⟩ := hdir x₀ y₀ hx₀ hy₀
```

```
  exact ⟨f z₀, ⟨z₀, hz₀, rfl⟩, hmono hxz, hmono hyz⟩

structure ScottContinuous (A : InfoSys α) (B : InfoSys β) where
  toFun : A.Element → B.Element
  mono' : ∀ {x y : A.Element}, x ≤ y → toFun x ≤ toFun y
  map_directedSup :
    ∀ (S : Set A.Element) (hne : S.Nonempty) (hdir : A.IsDirected S),
      toFun (A.directedSup S hne hdir) =
        B.directedSup (toFun '' S) (nonempty_image hne toFun)
          (directed_image hdir toFun mono')

end InfoSys
end DomainTheory.InformationSystems
```

basicOpen.lean

```
module

public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.ScottContinuous

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

def basicOpen (A : InfoSys α) (u : Finset α) : Set A.Element :=
  {x | ↑u ⊆ x.carrier}

theorem basicOpen.inter (A : InfoSys α) (u v : Finset α) :
    A.basicOpen u ∩ A.basicOpen v = A.basicOpen (u ∪' v) := by
  ext x
  constructor
  · intro ⟨hu, hv⟩ a ha
    rcases mem_funion.mp (Finset.mem_coe.1 ha) with h | h
    · exact hu (Finset.mem_coe.2 h)
    · exact hv (Finset.mem_coe.2 h)
  · intro huv
    refine ⟨?_, ?_⟩
    · intro a ha
      exact huv (Finset.mem_coe.2 (mem_funion.mpr (Or.inl (Finset.mem_coe.1 ha))))
    · intro a ha
      exact huv (Finset.mem_coe.2 (mem_funion.mpr (Or.inr (Finset.mem_coe.1 ha))))

end InfoSys
```

```
end DomainTheory.InformationSystems
```

mono.lean

```
module

public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.ScottContinuous

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

namespace ScottContinuous

variable {A : InfoSys α} {B : InfoSys β}

theorem mono (f : ScottContinuous A B) {x y : A.Element} (h : x ≤ y) :
    f.toFun x ≤ f.toFun y :=
  f.mono' h

end ScottContinuous

end InfoSys

end DomainTheory.InformationSystems
```

toElement_directedSup.lean

```
module

public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid44.le_directedSup
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.ScottContinuous

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

namespace ApproximableMap

variable {A : InfoSys α} {B : InfoSys β}

theorem toElement_directedSup (f : ApproximableMap A B)
    (S : Set A.Element) (hne : S.Nonempty) (hdir : A.IsDirected S) :
    f.toElement (A.directedSup S hne hdir) =
      B.directedSup (f.toElement '' S) (nonempty_image hne f.toElement)
        (directed_image hdir f.toElement f.toElement_mono) := by
  refine le_antisymm ?_ ?_
  · intro Y ⟨u, hu, hrel⟩
    have huU : (u : Set α) ⊆ A.familyUnionCarrier S := by
      intro a ha
      have : a ∈ (A.directedSup S hne hdir).carrier := hu ha
      rwa [directedSup.carrier_eq_union A S hne hdir] at this
    obtain ⟨z, hz, huZ⟩ := A.exists_mem_of_subset_directedUnion S hne hdir u huU
    have : Y ∈ (f.toElement z).carrier := ⟨u, huZ, hrel⟩
    rw [directedSup.carrier_eq_union B]
    exact ⟨f.toElement z, ⟨z, hz, rfl⟩, this⟩
  · apply directedSup.le B
    intro y hy
    obtain ⟨x, hx, rfl⟩ := hy
    exact f.toElement_mono (A.le_directedSup S hne hdir hx)

end ApproximableMap

end InfoSys

end DomainTheory.InformationSystems
```

toScottContinuous.lean

```
module

public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.ScottContinuous
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.toElement_directedSup

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

namespace ApproximableMap

variable {A : InfoSys α} {B : InfoSys β}

def toScottContinuous (f : ApproximableMap A B) : ScottContinuous A B where
  toFun := f.toElement
  mono' := f.toElement_mono
  map_directedSup := f.toElement_directedSup

end ApproximableMap

end InfoSys

end DomainTheory.InformationSystems
```

ofScottContinuous.lean

```
module

public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.ScottContinuous
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.mono

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

namespace ApproximableMap

variable {A : InfoSys α} {B : InfoSys β}

def ofScottContinuous (g : ScottContinuous A B) : ApproximableMap A B where
  rel u v := ∃ hu : u ∈ A.Con, v ∈ B.Con ∧ ↑v ⊆ (g.toFun (A.closure u hu)).carrier
  rel_dom := fun ⟨hu, _, _⟩ => hu
  rel_cod := fun ⟨_, hv, _⟩ => hv
  empty_rel := by
    refine ⟨A.con_empty, B.con_empty, ?_⟩
```

```
    intro b hb
    exact False.elim (Finset.notMem_empty _ (Finset.mem_coe.1 hb))
  union_right := by
    intro u v v' ⟨hu, hv, hsub⟩ ⟨_hu', hv', hsub'⟩
    refine ⟨hu, ?_, ?_⟩
    · have hsubUV : ↑(v ∪' v') ⊆ (g.toFun (A.closure u hu)).carrier := by
        intro b hb
        rcases mem_funion.mp (Finset.mem_coe.1 hb) with h | h
        · exact hsub (Finset.mem_coe.2 h)
        · exact hsub' (Finset.mem_coe.2 h)
      exact (g.toFun (A.closure u hu)).consistent (v ∪' v') hsubUV
    · intro b hb
      rcases mem_funion.mp (Finset.mem_coe.1 hb) with h | h
      · exact hsub (Finset.mem_coe.2 h)
      · exact hsub' (Finset.mem_coe.2 h)
  mono := by
    intro u u' v v' ⟨hu, hv, hsub⟩ hEntUU' hEntVV' hu' hv'
    refine ⟨hu', hv', ?_⟩
    have hclos : A.closure u hu ≤ A.closure u' hu' :=
      A.closure_le_of_entSet hu hu' hEntUU'
    intro b hb
    have hEntb : B.Ent v b := hEntVV' b hb
    have hb_in : b ∈ (g.toFun (A.closure u hu)).carrier :=
      (g.toFun (A.closure u hu)).closed v b hsub hEntb
    exact g.mono hclos hb_in

end ApproximableMap

end InfoSys

end DomainTheory.InformationSystems
```

mem_basicOpen.lean

```
module

public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.ScottContinuous
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.basicOpen
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.toScottContinuous
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.ofScottContinuous
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.mono
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.toElement_directedSup

@[expose] public section
```

```
namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

theorem mem_basicOpen {A : InfoSys α} {u : Finset α} {x : A.Element} :
    x ∈ A.basicOpen u ↔ ↑u ⊆ x.carrier := Iff.rfl

end InfoSys
end DomainTheory.InformationSystems
```

toElement_ofScottContinuous.lean

```
module

public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.ScottContinuous
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.basicOpen
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.toScottContinuous
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.ofScottContinuous
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.mono
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.toElement_directedSup

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

namespace ApproximableMap

variable {A : InfoSys α} {B : InfoSys β}

theorem toElement_ofScottContinuous (g : ScottContinuous A B) (x : A.Element) :
    (ofScottContinuous g).toElement x = g.toFun x := by
  refine le_antisymm ?_ ?_
  · intro Y ⟨u, hu, ⟨huCon, _, hsub⟩⟩
```

```
    have : A.closure u huCon ≤ x := A.closure_le_element x huCon hu
    exact g.mono this (hsub (Finset.mem_coe.2 (Finset.mem_singleton_self Y)))
  · intro Y hY
    let S := A.finiteApproximants x
    have hne := A.nonempty_finiteApproximants x
    have hdir := A.directed_finiteApproximants x
    have hx : x = A.directedSup S hne hdir := A.eq_directedSup_finiteApproximants x
    have hdirImg := directed_image hdir g.toFun g.mono'
    have hneImg := nonempty_image hne g.toFun
    have hg : g.toFun x = B.directedSup (g.toFun '' S) hneImg hdirImg := by
      have h1 : g.toFun x = g.toFun (A.directedSup S hne hdir) := congrArg g.toFun hx
      have h2 : g.toFun (A.directedSup S hne hdir) =
          B.directedSup (g.toFun '' S) hneImg hdirImg :=
        g.map_directedSup S hne hdir
      exact h1.trans h2
    have hY' : Y ∈ (B.directedSup (g.toFun '' S) hneImg hdirImg).carrier := by
      rw [← hg]; exact hY
    have hY'' : Y ∈ B.familyUnionCarrier (g.toFun '' S) := by
      rwa [← directedSup.carrier_eq_union B (g.toFun '' S) hneImg hdirImg]
    obtain ⟨z, hz, hYz⟩ := hY''
    obtain ⟨y, hy, rfl⟩ := hz
    obtain ⟨u, hu, huX, rfl⟩ := hy
    refine ⟨u, huX, ⟨hu, B.con_sing Y, ?_⟩⟩
    intro b hb
    have : b = Y := Finset.mem_singleton.mp (Finset.mem_coe.1 hb)
    subst this
    exact hYz

end ApproximableMap
end InfoSys

end DomainTheory.InformationSystems
```

Factoid46.lean

```
module

public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.toElement_ofScottContinuous

@[expose] public section

namespace DomainTheory.InformationSystems.InfoSys.ApproximableMap

set_option linter.unusedVariables false

theorem theorem_46.{u_1, u_2} : ∀ {α : Type u_1} {β : Type u_2} [inst : DecidableEq α]
     [inst_1 : DecidableEq β]
  {A : @DomainTheory.InformationSystems.InfoSys α inst} {B : @DomainTheory.
    InformationSystems.InfoSys β inst_1}
  (g : @DomainTheory.InformationSystems.InfoSys.ScottContinuous α β inst inst_1 A B)
  (x : @DomainTheory.InformationSystems.InfoSys.Element α inst A),
  @Eq (@DomainTheory.InformationSystems.InfoSys.Element β inst_1 B)
    (@DomainTheory.InformationSystems.InfoSys.ApproximableMap.toElement α β inst
    inst_1 A B
```

```
      (@DomainTheory.InformationSystems.InfoSys.ApproximableMap.ofScottContinuous α β
    inst inst_1 A B g) x)
     (@DomainTheory.InformationSystems.InfoSys.ScottContinuous.toFun α β inst inst_1 A
    B g x) :=
  @DomainTheory.InformationSystems.InfoSys.ApproximableMap.toElement_ofScottContinuous

end DomainTheory.InformationSystems.InfoSys.ApproximableMap
```

eq_of_basicOpen_eq.lean

```
module

public import DomainTheory.InformationSystems.ApproximableMappingsBetweenDomains.
    Approximable
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid45
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.ScottContinuous
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.basicOpen
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.toScottContinuous
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.ofScottContinuous
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.mono
public import DomainTheory.InformationSystems.DomainsAsLatticesAndAsTopologicalSpaces.
    Factoid46.toElement_directedSup

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

theorem eq_of_basicOpen_eq (A : InfoSys α) {x y : A.Element}
    (h : ∀ u : Finset α, x ∈ A.basicOpen u ↔ y ∈ A.basicOpen u) : x = y := by
  refine le_antisymm ?_ ?_
  · intro a ha
    have : x ∈ A.basicOpen {a} := by
      intro b hb
      have : b = a := Finset.mem_singleton.mp (Finset.mem_coe.1 hb)
      subst this
      exact ha
    exact ((h {a}).1 this) (Finset.mem_coe.2 (Finset.mem_singleton_self a))
  · intro a ha
    have : y ∈ A.basicOpen {a} := by
      intro b hb
      have : b = a := Finset.mem_singleton.mp (Finset.mem_coe.1 hb)
      subst this
```

```
      exact ha
    exact ((h {a}).2 this) (Finset.mem_coe.2 (Finset.mem_singleton_self a))

end InfoSys
end DomainTheory.InformationSystems
```

fstFinset.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst5
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    ProdToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst7
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeFstInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeSndInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    mem_foldr_fst

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]
variable (A : InfoSys α) (B : InfoSys β)

def fstFinset (u : Finset (ProdToken A B)) : Finset α :=
  Multiset.foldr (fun p : ProdToken A B => insert p.val.1) (∅ : Finset α)
    (u.filter (fun p => p.val.2 = B.bot)).1

theorem mem_fstFinset {u : Finset (ProdToken A B)} {x : α} :
    x ∈ fstFinset A B u ↔ ∃ p ∈ u, p.val.2 = B.bot ∧ p.val.1 = x := by
  unfold fstFinset
  rw [mem_foldr_fst]
  constructor
  · rintro ⟨p, hp, hx⟩
    have hp' := Finset.mem_filter.mp hp
    exact ⟨p, hp'.1, hp'.2, hx⟩
  · rintro ⟨p, hp, hbot, hx⟩
    exact ⟨p, Finset.mem_filter.mpr ⟨hp, hbot⟩, hx⟩

theorem fstFinset.empty : fstFinset A B (∅ : Finset (ProdToken A B)) = ∅ := by
  ext x
  constructor
  · intro hx
```

```
    rcases (mem_fstFinset A B).1 hx with ⟨_, hp, _, _⟩
    exact False.elim (Finset.notMem_empty _ hp)
  · intro hx
    exact False.elim (Finset.notMem_empty x hx)

theorem fstFinset.funion (u v : Finset (ProdToken A B)) :
    fstFinset A B (u ∪' v) = fstFinset A B u ∪' fstFinset A B v := by
  ext x
  constructor
  · intro hx
    rcases (mem_fstFinset A B).1 hx with ⟨p, hp, hbot, hx'⟩
    rcases mem_funion.mp hp with hp | hp
    · exact mem_funion.mpr (Or.inl ((mem_fstFinset A B).2 ⟨p, hp, hbot, hx'⟩))
    · exact mem_funion.mpr (Or.inr ((mem_fstFinset A B).2 ⟨p, hp, hbot, hx'⟩))
  · intro hx
    rcases mem_funion.mp hx with hx | hx
    · rcases (mem_fstFinset A B).1 hx with ⟨p, hp, hbot, hx'⟩
      exact (mem_fstFinset A B).2 ⟨p, mem_funion.mpr (Or.inl hp), hbot, hx'⟩
    · rcases (mem_fstFinset A B).1 hx with ⟨p, hp, hbot, hx'⟩
      exact (mem_fstFinset A B).2 ⟨p, mem_funion.mpr (Or.inr hp), hbot, hx'⟩

theorem fstFinset.insert_left (u : Finset (ProdToken A B)) (p : ProdToken A B)
    (hp : p.val.2 = B.bot) :
    fstFinset A B (insert p u) = insert p.val.1 (fstFinset A B u) := by
  ext x
  constructor
  · intro hx
    rcases (mem_fstFinset A B).1 hx with ⟨q, hq, hbot, hx'⟩
    rcases Finset.mem_insert.mp hq with rfl | hq
    · exact Finset.mem_insert.mpr (Or.inl hx'.symm)
    · exact Finset.mem_insert.mpr (Or.inr ((mem_fstFinset A B).2 ⟨q, hq, hbot, hx'⟩))
  · intro hx
    rcases Finset.mem_insert.mp hx with hx' | hx'
    · exact (mem_fstFinset A B).2 ⟨p, Finset.mem_insert_self p u, hp, hx'.symm⟩
    · rcases (mem_fstFinset A B).1 hx' with ⟨q, hq, hbot, hxq⟩
      exact (mem_fstFinset A B).2 ⟨q, Finset.mem_insert_of_mem hq, hbot, hxq⟩

theorem fstFinset.insert_not_left (u : Finset (ProdToken A B)) (p : ProdToken A B)
    (hp : p.val.2 = B.bot) :
    fstFinset A B (insert p u) = fstFinset A B u := by
  ext x
  constructor
  · intro hx
    rcases (mem_fstFinset A B).1 hx with ⟨q, hq, hbot, hx'⟩
    rcases Finset.mem_insert.mp hq with rfl | hq
    · exact False.elim (hp hbot)
    · exact (mem_fstFinset A B).2 ⟨q, hq, hbot, hx'⟩
  · intro hx
    rcases (mem_fstFinset A B).1 hx with ⟨q, hq, hbot, hx'⟩
    exact (mem_fstFinset A B).2 ⟨q, Finset.mem_insert_of_mem hq, hbot, hx'⟩

theorem fstFinset.mono {u v : Finset (ProdToken A B)} (h : v ⊆ u) :
    fstFinset A B v ⊆ fstFinset A B u := by
  intro x hx
  rcases (mem_fstFinset A B).1 hx with ⟨p, hp, hbot, hx'⟩
  exact (mem_fstFinset A B).2 ⟨p, h hp, hbot, hx'⟩
```

```
theorem fstFinset.singleton_left (p : ProdToken A B) (hp : p.val.2 = B.bot) :
    fstFinset A B {p} = {p.val.1} := by
  rw [show ({p} : Finset _) = insert p ∅ from rfl, fstFinset.insert_left A B ∅ p hp,
    fstFinset.empty]
  rfl

end InfoSys

end DomainTheory.InformationSystems
```

ProdCon.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst5
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    ProdToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst7
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeFstInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeSndInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    fstFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    sndFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

def ProdCon (u : Finset (ProdToken A B)) : Prop :=
  fstFinset A B u ∈ A.Con ∧ sndFinset A B u ∈ B.Con

end InfoSys

end DomainTheory.InformationSystems
```

ProdEnt.lean

```
module
```

```
public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst5
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    ProdToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst7
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeFstInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeSndInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    fstFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    sndFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.ProdCon

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

def ProdEnt (u : Finset (ProdToken A B)) (p : ProdToken A B) : Prop :=
  ProdCon A B u ∧
    (p.val.2 = B.bot → A.Ent (fstFinset A B u) p.val.1) ∧
      (p.val.1 = A.bot → B.Ent (sndFinset A B u) p.val.2)

end InfoSys

end DomainTheory.InformationSystems
```

productSystem.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst5
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    ProdToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst7
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.prodBot
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeFstInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
```

```
    instLeftCommutativeSndInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    fstFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    sndFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.ProdCon
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.ProdEnt

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α β : Type*} [DecidableEq α] [DecidableEq β]

variable (A : InfoSys α) (B : InfoSys β)

def productSystem : InfoSys (ProdToken A B) where
  bot := prodBot A B
  Con := {u | ProdCon A B u}
  Ent := ProdEnt A B
  con_subset := by
    intro u v hu hv
    exact ⟨A.con_subset hu.1 (fstFinset.mono A B hv),
      B.con_subset hu.2 (sndFinset.mono A B hv)⟩
  con_sing := by
    intro p
    refine ⟨?_, ?_⟩
    · rcases p.property.out with h1 | h2
      · by_cases h2 : p.val.2 = B.bot
        · have hpeq : p = prodBot A B := Subtype.ext (Prod.ext h1 h2)
          subst hpeq
          rw [fstFinset.singleton_left A B (prodBot A B) rfl]
          exact A.con_sing A.bot
        · have hfst : fstFinset A B {p} = ∅ := by
            ext x
            constructor
            · intro hx
              rcases (mem_fstFinset A B).1 hx with ⟨q, hq, hbot', _⟩
              have hq' : q = p := Finset.mem_singleton.mp hq
              subst hq'
              exact False.elim (h2 hbot')
            · intro hx
              exact False.elim (Finset.notMem_empty x hx)
          rw [hfst]
          exact A.con_empty
      · rw [fstFinset.singleton_left A B p h2]
        exact A.con_sing p.val.1
    · rcases p.property.out with h1 | h2
      · rw [sndFinset.singleton_right A B p h1]
        exact B.con_sing p.val.2
      · by_cases h1 : p.val.1 = A.bot
        · have hpeq : p = prodBot A B := Subtype.ext (Prod.ext h1 h2)
```

```
          subst hpeq
          rw [sndFinset.singleton_right A B (prodBot A B) rfl]
          exact B.con_sing B.bot
        · have hsnd : sndFinset A B {p} = ∅ := by
            ext y
            constructor
            · intro hy
              rcases (mem_sndFinset A B).1 hy with ⟨q, hq, hbot', _⟩
              have hq' : q = p := Finset.mem_singleton.mp hq
              subst hq'
              exact False.elim (h1 hbot')
            · intro hy
              exact False.elim (Finset.notMem_empty y hy)
          rw [hsnd]
          exact B.con_empty
  ent_con := by
    intro u p ⟨⟨hfst, hsnd⟩, hL, hR⟩
    refine ⟨?_, ?_⟩
    · by_cases hp2 : p.val.2 = B.bot
      · rw [fstFinset.insert_left A B u p hp2]
        exact A.ent_con (hL hp2)
      · rw [fstFinset.insert_not_left A B u p hp2]
        exact hfst
    · by_cases hp1 : p.val.1 = A.bot
      · rw [sndFinset.insert_right A B u p hp1]
        exact B.ent_con (hR hp1)
      · rw [sndFinset.insert_not_right A B u p hp1]
        exact hsnd
  ent_bot := by
    intro u hu
    exact ⟨hu, fun _ => A.ent_bot hu.1, fun _ => B.ent_bot hu.2⟩
  ent_refl := by
    intro u p hu hp
    refine ⟨hu, ?_, ?_⟩
    · intro hbot
      exact A.ent_refl hu.1 ((mem_fstFinset A B).2 ⟨p, hp, hbot, rfl⟩)
    · intro hbot
      exact B.ent_refl hu.2 ((mem_sndFinset A B).2 ⟨p, hp, hbot, rfl⟩)
  ent_trans := by
    intro u v c hv hu hEnts hEntc
    refine ⟨hv, ?_, ?_⟩
    · intro hbot
      have hfst : ∀ y ∈ fstFinset A B u, A.Ent (fstFinset A B v) y := by
        intro y hy
        rcases (mem_fstFinset A B).1 hy with ⟨q, hq, hq2, rfl⟩
        exact (hEnts q hq).2.1 hq2
      exact A.ent_trans hv.1 hu.1 hfst (hEntc.2.1 hbot)
    · intro hbot
      have hsnd : ∀ y ∈ sndFinset A B u, B.Ent (sndFinset A B v) y := by
        intro y hy
        rcases (mem_sndFinset A B).1 hy with ⟨q, hq, hq1, rfl⟩
        exact (hEnts q hq).2.2 hq1
      exact B.ent_trans hv.2 hu.2 hsnd (hEntc.2.2 hbot)

end InfoSys
```

```
end DomainTheory.InformationSystems
```

Product.lean

```
module

public import DomainTheory.InformationSystems.InformationSystems.Constructive
public import DomainTheory.InformationSystems.InformationSystems.Proposition23
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    IsProdToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    ProdToken
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.prodBot
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    fstFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    sndFinset
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.ProdCon
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.ProdEnt
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    productSystem
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst5
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    BasicInst7
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeFstInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    instLeftCommutativeSndInsert
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    mem_foldr_fst
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product.
    mem_foldr_snd

@[expose] public section
```

4.8 Some domain equations

Dependencies. Inside SomeDomainEquations, each box is one subfolder, or one Lean file sitting directly in the folder. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

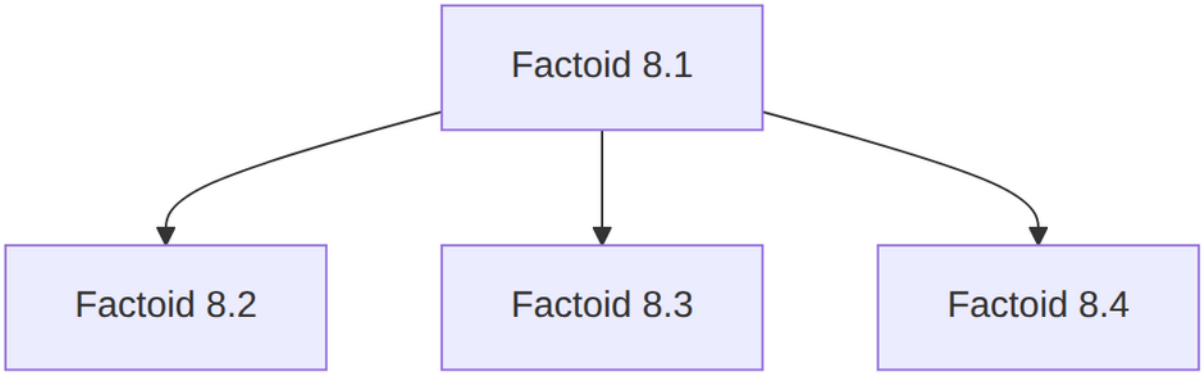

Figure 54: Some domain equations.

Having outlined the theory of several domain constructs, the final topic for this paper will be the discussion of the *iteration* of these constructs in giving *recursive*, rather than direct definitions of domains. These recursively defined systems have often been called "reflexive," because the domains generally contain copies of themselves as a part of their very structure. The way that this self-containment takes place is best expressed by the so-called *domain equations*, which are really isomorphisms that relate the domain as a whole to a combination of domains—usually with the main domain as a component. This description is rough, since recursion equations for domains can be as complex as recursion equations for functions. We will not enter into a full theory of domain equations now but will just review some preliminary examples to illustrate how the new presentation makes the constructions more explicit.

4.8.1 Factoid 8.1

A domain of trees or S-expressions. This is everyone's favorite example. And a very nice example it is, but we should not think that it contains all the meat of the theory of domain equations. Even if we generalize the kinds of equations to contain all iterations of the domain constructs $+$ and $\times$, the full power of the method has not been exploited. We will try to make this clear in the further examples.

Let a domain (information system) $\mathbf{A}$ be given. What we want to construct is a domain $\mathbf{T}$ of "trees" built up from elements of $\mathbf{A}$ as "atoms". For simplicity we consider unlabelled binary trees here, but more complex trees are easy to accommodate. The domain equation we want to "solve" is this one:

$$\mathbf{T} \cong \mathbf{A} + (\mathbf{T} \times \mathbf{T}).$$

If such a domain exists, then we can say that (up to isomorphism) the elements of the domain $\mathbf{T}$ are either bottom, or elements of the given domain $\mathbf{A}$, or pairs of elements from the domain $\mathbf{T}$ itself. And these are the only kinds of elements that $\mathbf{T}$ has.

To prove that such a domain exists it is only necessary to ask what information has to be given about a prospective element. The answer may involve us in a regress, but the running backwards need not be infinite—at least for the finite elements. As we shall see, the infinite elements of $\mathbf{T}$ can be self-replicating; but, to define a domain fully, all we have to do is to build up the finite elements out of the data objects in a systematic way. Fortunately, in order to satisfy the above equation, the required closure conditions on data objects are simple to achieve.

In the first place, we need copies of all the data objects of $\mathbf{A}$ to put into the sum. The easy way to do this is to take an object Δ not in $D_{\mathbf{A}}$, and to let, by definition,

$$\Delta_{\mathbf{T}} = (\Delta, \Delta).$$

That gives us one member of $D_{\mathbf{T}}$, the one we always have to have in any case. The copy of an $X \in D_{\mathbf{A}}$ is just going to be (X, Δ). The other members of $D_{\mathbf{T}}$ will be of the form (Δ, U), where U gives us information about the other kind of elements of $\mathbf{T}$. The point is that $\mathbf{T}$ has to be a sum, and we are using just the scheme of Definition 6.3 to set this up.

Next we have to think what kind of information the U above should contain. Because we want a product, we refer back to Definition 6.1 and imagine we have already defined $D_{\mathbf{T}}$. What 6.1(i) suggests is that we throw in a bunch of other data objects into $D_{\mathbf{T}}$. The only point that needs care is that the data objects for the product must be copied into the overall sum. With this in mind, the following clauses give us the inductive definition of $D_{\mathbf{T}}$:

(1) $\Delta_{\mathbf{T}} \in D_{\mathbf{T}}$;

(2) $(X, \Delta) \in D_{\mathbf{T}}$ whenever $X \in D_{\mathbf{A}}$; and

(3) $(\Delta, (Y, \Delta_{\mathbf{T}})) \in D_{\mathbf{T}}$, and $(\Delta, (\Delta_{\mathbf{T}}, Z)) \in D_{\mathbf{T}}$ whenever $Y, Z \in D_{\mathbf{T}}$.

Of course, when we say "inductive definition," we mean that $D_{\mathbf{T}}$ is the least class satisfying (1)–(3). By standard arguments it can be shown that $D_{\mathbf{T}}$ satisfies this set-theoretical equation:

$$D_{\mathbf{T}} = \{\Delta_{\mathbf{T}}\} \cup \{(X, \Delta) \mid X \in D_{\mathbf{A}}\} \cup \{(\Delta, (Y, \Delta_{\mathbf{T}})) \mid Y \in D_{\mathbf{T}}\} \cup \{(\Delta, (\Delta_{\mathbf{T}}, Z)) \mid Z \in D_{\mathbf{T}}\}.$$

In fact, with some very mild assumptions about ordered pairs in set theory, $D_{\mathbf{T}}$ is the only solution to the above equation.

Defining the data objects is but part of the story: the same data objects can enter into quite different information systems. Data objects are just "tokens" and are only given "meaning" when $\mathrm{Con}_{\mathbf{T}}$ and $\vdash_{\mathbf{T}}$ are defined. Let us consider the problem of consistency first. We already understand the notion as it applies to sum and product systems, so we must merely copy over the parts of the previous definitions in the right position for the definition of $\mathrm{Con}_{\mathbf{T}}$. There are two forms we could give this definition; perhaps the best is the inductive one. We have:

(4) $\emptyset \in \mathrm{Con}_{\mathbf{T}}$;

(5) $u \cup \{\Delta_{\mathbf{T}}\} \in \mathrm{Con}_{\mathbf{T}}$ whenever $u \in \mathrm{Con}_{\mathbf{T}}$;

(6) $\{(X, \Delta) \mid X \in w\} \in \mathrm{Con}_{\mathbf{T}}$ whenever $w \in \mathrm{Con}_{\mathbf{A}}$;

(7) $\{(\Delta, (Y, \Delta_{\mathbf{T}})) \mid Y \in u\} \cup \{(\Delta, (\Delta_{\mathbf{T}}, Z)) \mid Z \in v\} \in \mathrm{Con}_{\mathbf{T}}$ whenever $u, v \in \mathrm{Con}_{\mathbf{T}}$.

Conditions (4)–(7) certainly make the inductive character of $\mathrm{Con}_{\mathbf{T}}$ clear—again, let us emphasize, the set being specified is the least such. Also clear from the definition is the fact that a consistent set of $\mathbf{T}$—aside from containing $\Delta_{\mathbf{T}}$—is either a copy of a consistent set of $\mathbf{A}$ or a copy of a consistent set of $\mathbf{T} \times \mathbf{T}$. We could thus state a set-theoretical equation for $\mathrm{Con}_{\mathbf{T}}$ similar to the one for $D_{\mathbf{T}}$.

It remains to define entailment for $\mathbf{T}$. Here are the inductive clauses which are pretty much forced on us by our objective of solving the domain equation:

(8) $u \vdash_{\mathbf{T}} \Delta_{\mathbf{T}}$ always;

(9) $u \cup \{\Delta_{\mathbf{T}}\} \vdash_{\mathbf{T}} Y$ whenever $u \vdash_{\mathbf{T}} Y$;

(10) $\{(X, \Delta) \mid X \in w\} \vdash_{\mathbf{T}} (W, \Delta)$ whenever $w \vdash_{\mathbf{A}} W$;

(11) $\{(\Delta, (Y, \Delta_{\mathbf{T}})) \mid Y \in u\} \cup \{(\Delta, (\Delta_{\mathbf{T}}, Z)) \mid Z \in v\} \vdash_{\mathbf{T}} (\Delta, (X, \Delta_{\mathbf{T}}))$ whenever $u \vdash_{\mathbf{T}} X$ and $v \in \mathrm{Con}_{\mathbf{T}}$; and

(12) $\{(\Delta, (Y, \Delta_{\mathbf{T}})) \mid Y \in u\} \cup \{(\Delta, (\Delta_{\mathbf{T}}, Z)) \mid Z \in v\} \vdash_{\mathbf{T}} (\Delta, (\Delta_{\mathbf{T}}, X))$ whenever $v \vdash_{\mathbf{T}} X$ and $u \in \mathrm{Con}_{\mathbf{T}}$.

Inductive definitions engender inductive proofs. It now has to be checked that consistency and entailment for $\mathbf{T}$ satisfy the axioms of 2.1. The steps needed for this check are mechanical. (The proof may be aided by noting that the cases in (4)–(7) and in (8)–(12) are disjoint—except for a trivial overlap between (8) and (9). The cases get invoked typically by asking, when confronted with an entailment to prove, for the nature of the data object on the right of the turnstile.)

Having defined and verified that $\mathbf{T}$ is an information system, the validity of the domain equation for $\mathbf{T}$ is secured by forming the right-hand side and noting that $\mathbf{T}$ is *identical* to $\mathbf{A} + (\mathbf{T} \times \mathbf{T})$. The reason is that we carefully chose the notation to match the official definitions of sums and products. (In general, in solving domain equations some transformation might have to take place to "re-format" data objects if things are not set up to be literally the same.)

It should be remarked that the sense can be made precise in which $\mathbf{T}$ is the *least* solution of the given domain equation. (It is an initial algebra in a suitable category of algebras and algebra homomorphisms.) It is pretty obvious that it is minimal in some sense, because we put into it only what was strictly required by the problem and nothing more.

It is also fairly obvious that there are *many* solutions to this domain equation. A non-constructive way to obtain non-minimal solutions is to interpret the whole construction of $\mathbf{T}$ in a non-standard model of set theory. Though, in the definition of $D_{\mathbf{T}}$, it looks like we are only working with very finite objects, everything we did could be made abstract and could be carried out in some funny universe. The result would be a system of "finite" data objects having all the right formal properties but containing things not in the standard minimal system. We would then take the notions of consistency and entailment that also exist in the funny universe and restrict them to sets of data objects that are actually finite in the standard sense. It can be seen from the formal properties of the construction that the resulting notions satisfy our axioms for an information system and that the domain equation holds—BUT the system would have many different elements beyond what we put into the original $\mathbf{T}$. To make this construction work, by the way, we would have to force $\mathbf{A}$ to be absolute in the model: if it is actually finite (say, $\mathbf{A} = \mathbf{BOOL}$), then there is no problem. (Constructive methods for introducing "nonstandard" data objects can also be given.)

Finally, we must remark on why we called $\mathbf{T}$ a domain of S-expressions. The answer becomes clear when we structure $\mathbf{T}$ as an algebra. First, there is an approximable mapping

$$\mathrm{atom} : \mathbf{A} \to \mathbf{T},$$

which injects $\mathbf{A}$ into $\mathbf{T}$ making the elements of $\mathbf{A}$ "atoms" of $\mathbf{T}$. Then there is a truth-valued predicate on $\mathbf{T}$ which decides whether an element is an atom:

$$\mathrm{isatom} : \mathbf{T} \to \mathbf{BOOL}.$$

Finally, since $\mathbf{T} \times \mathbf{T}$ is a part of $\mathbf{T}$, we can redefine the paring functions so that:

$$\text{pair} : \mathbf{T} \times \mathbf{T} \to \mathbf{T}, \quad \text{fst} : \mathbf{T} \to \mathbf{T}, \quad \text{and snd} : \mathbf{T} \to \mathbf{T}.$$

In LISP terminology, these operations are the same as the familiar cons, car, and cdr. This makes $\mathbf{T}$ into an algebra where, starting from atoms, elements—expressions—can be built up by iterated pairing.

But why is our system different from the usual way of regarding S-expressions? The answer is that by including partial expressions (those involving $\Delta_{\mathbf{T}}$) and by completing the domain with limits, *infinite* expressions are introduced. For instance, if $a \in |\mathbf{T}|$, then we can solve the fixed-point equation:

$$x = \text{pair}(\text{atom}(a), x),$$

which is an infinite list of a's. This is but one example; the possibilities have been discussed in many papers too numerous to mention here.

As is common to remark, S-expressions can also be thought of as trees: the parse tree that gives the grammatical form of the expression. What we have added to the idea of a tree is the possibility of having infinite trees, and having all these trees as elements of a domain. ■

TreeToken.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

universe u

inductive TreeToken (α : Type u) where
  | bot : TreeToken α
  | atom : α → TreeToken α
  | pairL : TreeToken α → TreeToken α
  | pairR : TreeToken α → TreeToken α

instance instDecidableEqTreeToken {α : Type u} [DecidableEq α] :
    DecidableEq (TreeToken α)
  | .bot, .bot => isTrue rfl
  | .atom a, .atom b =>
      if h : a = b then isTrue (h ▶ rfl)
      else isFalse fun h' => h (TreeToken.atom.inj h')
  | .pairL a, .pairL b =>
      match instDecidableEqTreeToken a b with
      | isTrue h => isTrue (h ▶ rfl)
      | isFalse h => isFalse fun h' => h (TreeToken.pairL.inj h')
  | .pairR a, .pairR b =>
      match instDecidableEqTreeToken a b with
      | isTrue h => isTrue (h ▶ rfl)
```

```
      | isFalse h => isFalse fun h' => h (TreeToken.pairR.inj h')
  | .bot, .atom _ => isFalse fun h => nomatch h
  | .bot, .pairL _ => isFalse fun h => nomatch h
  | .bot, .pairR _ => isFalse fun h => nomatch h
  | .atom _, .bot => isFalse fun h => nomatch h
  | .atom _, .pairL _ => isFalse fun h => nomatch h
  | .atom _, .pairR _ => isFalse fun h => nomatch h
  | .pairL _, .bot => isFalse fun h => nomatch h
  | .pairL _, .atom _ => isFalse fun h => nomatch h
  | .pairL _, .pairR _ => isFalse fun h => nomatch h
  | .pairR _, .bot => isFalse fun h => nomatch h
  | .pairR _, .atom _ => isFalse fun h => nomatch h
  | .pairR _, .pairL _ => isFalse fun h => nomatch h

end InfoSys
end DomainTheory.InformationSystems
```

pairRFinset.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
variable (A : InfoSys α)

private def pairRInsert : TreeToken α → Finset (TreeToken α) → Finset (TreeToken α)
  | .pairR t => insert t
  | .bot | .atom _ | .pairL _ => id

instance :
    LeftCommutative (pairRInsert : TreeToken α → Finset (TreeToken α) → Finset (
    TreeToken α)) :=
  ⟨fun p q s => by cases p <;> cases q <;> first | exact insert_comm' _ _ s | rfl⟩

def pairRFinset (u : Finset (TreeToken α)) : Finset (TreeToken α) :=
  Multiset.foldr pairRInsert (∅ : Finset (TreeToken α)) u.1

private theorem mem_foldr_pairR (s : Multiset (TreeToken α)) (t : TreeToken α) :
    t ∈ Multiset.foldr pairRInsert (∅ : Finset (TreeToken α)) s ↔
      ∃ p ∈ s, p = .pairR t := by
  refine Multiset.induction_on s ?_ ?_
  · constructor
    · intro ht; exact False.elim (Finset.notMem_empty t ht)
    · rintro ⟨_, hp, _⟩; exact False.elim (by cases hp)
```

```
  · intro p rest ih
    cases p with
    | pairR a =>
      simp only [Multiset.foldr_cons, pairRInsert, Finset.mem_insert, ih, Multiset.
    mem_cons]
      constructor
      · rintro (ht | ⟨q, hq, hq'⟩)
        · exact ⟨.pairR a, Or.inl rfl, congrArg TreeToken.pairR ht.symm⟩
        · exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · injection hq' with ht; exact Or.inl ht.symm
        · exact Or.inr ⟨q, hq, hq'⟩
    | bot | atom _ | pairL _ =>
      simp only [Multiset.foldr_cons, pairRInsert, id_eq, ih, Multiset.mem_cons]
      constructor
      · rintro ⟨q, hq, hq'⟩; exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · exact False.elim (nomatch hq')
        · exact ⟨q, hq, hq'⟩

theorem mem_pairRFinset {u : Finset (TreeToken α)} {t : TreeToken α} :
    t ∈ pairRFinset u ↔ .pairR t ∈ u := by
  constructor
  · intro ht
    rcases (mem_foldr_pairR u.1 t).1 ht with ⟨p, hp, hp'⟩
    subst hp'; exact Finset.mem_def.2 hp
  · intro ht
    exact (mem_foldr_pairR u.1 t).2 ⟨.pairR t, Finset.mem_def.1 ht, rfl⟩

end InfoSys
end DomainTheory.InformationSystems
```

mem_pairRFinset.lean

```
module

public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
```

atomInsert.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive
```

```
namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def atomInsert : TreeToken α → Finset α → Finset α
  | .atom x => insert x
  | .bot | .pairL _ | .pairR _ => id

end InfoSys

end DomainTheory.InformationSystems
```

atomFinset.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomInsert

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
variable (A : InfoSys α)

instance : LeftCommutative (atomInsert : TreeToken α → Finset α → Finset α) :=
  ⟨fun p q s => by cases p <;> cases q <;> first | exact insert_comm' _ _ s | rfl⟩

def atomFinset (u : Finset (TreeToken α)) : Finset α :=
  Multiset.foldr atomInsert (∅ : Finset α) u.1

end InfoSys
end DomainTheory.InformationSystems
```

pairLFinset.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
variable (A : InfoSys α)

private def pairLInsert : TreeToken α → Finset (TreeToken α) → Finset (TreeToken α)
  | .pairL t => insert t
  | .bot | .atom _ | .pairR _ => id

instance :
    LeftCommutative (pairLInsert : TreeToken α → Finset (TreeToken α) → Finset (
    TreeToken α)) :=
  ⟨fun p q s => by cases p <;> cases q <;> first | exact insert_comm' _ _ s | rfl⟩

def pairLFinset (u : Finset (TreeToken α)) : Finset (TreeToken α) :=
  Multiset.foldr pairLInsert (∅ : Finset (TreeToken α)) u.1

private theorem mem_foldr_pairL (s : Multiset (TreeToken α)) (t : TreeToken α) :
    t ∈ Multiset.foldr pairLInsert (∅ : Finset (TreeToken α)) s ↔
      ∃ p ∈ s, p = .pairL t := by
  refine Multiset.induction_on s ?_ ?_
  · constructor
    · intro ht; exact False.elim (Finset.notMem_empty t ht)
    · rintro ⟨_, hp, _⟩; exact False.elim (by cases hp)
  · intro p rest ih
    cases p with
    | pairL a =>
      simp only [Multiset.foldr_cons, pairLInsert, Finset.mem_insert, ih, Multiset.
    mem_cons]
      constructor
      · rintro (ht | ⟨q, hq, hq'⟩)
        · exact ⟨.pairL a, Or.inl rfl, congrArg TreeToken.pairL ht.symm⟩
        · exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · injection hq' with ht; exact Or.inl ht.symm
        · exact Or.inr ⟨q, hq, hq'⟩
    | bot | atom _ | pairR _ =>
      simp only [Multiset.foldr_cons, pairLInsert, id_eq, ih, Multiset.mem_cons]
      constructor
      · rintro ⟨q, hq, hq'⟩; exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · exact False.elim (nomatch hq')
        · exact ⟨q, hq, hq'⟩

theorem mem_pairLFinset {u : Finset (TreeToken α)} {t : TreeToken α} :
    t ∈ pairLFinset u ↔ .pairL t ∈ u := by
  constructor
  · intro ht
    rcases (mem_foldr_pairL u.1 t).1 ht with ⟨p, hp, hp'⟩
    subst hp'; exact Finset.mem_def.2 hp
  · intro ht
    exact (mem_foldr_pairL u.1 t).2 ⟨.pairL t, Finset.mem_def.1 ht, rfl⟩
```

```
end InfoSys
end DomainTheory.InformationSystems
```

TreeCon.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
variable (A : InfoSys α)

inductive TreeCon : Finset (TreeToken α) → Prop where
  | left (u : Finset (TreeToken α))
      (hA : atomFinset u ∈ A.Con)
      (hL : pairLFinset u = ∅) (hR : pairRFinset u = ∅) : TreeCon u
  | right (u : Finset (TreeToken α))
      (hA : atomFinset u = ∅)
      (hL : TreeCon (pairLFinset u)) (hR : TreeCon (pairRFinset u)) : TreeCon u

theorem TreeCon.atom_con_of_atoms {u : Finset (TreeToken α)}
    (hu : TreeCon A u) (hne : atomFinset u = ∅) : atomFinset u ∈ A.Con := by
  cases hu with
  | left _ hA _ _ => exact hA
  | right _ hA _ _ => exact False.elim (hne hA)

theorem TreeCon.atoms_empty_of_right {u : Finset (TreeToken α)}
    (hu : TreeCon A u) (hP : pairLFinset u = ∅ ∨ pairRFinset u = ∅) :
    atomFinset u = ∅ := by
  cases hu with
  | left _ _ hL hR =>
    rcases hP with h | h
    · exact False.elim (h hL)
    · exact False.elim (h hR)
  | right _ hA _ _ => exact hA

theorem TreeCon.pairs_empty_of_left {u : Finset (TreeToken α)}
    (hu : TreeCon A u) (hA : atomFinset u = ∅) :
    pairLFinset u = ∅ ∧ pairRFinset u = ∅ := by
```

```
  cases hu with
  | left _ _ hL hR => exact ⟨hL, hR⟩
  | right _ hAt _ _ => exact False.elim (hA hAt)

end InfoSys

end DomainTheory.InformationSystems
```

pairLFinset_insert_atom.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairLFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairLFinset_insert_atom (u : Finset (TreeToken α)) (x : α) :
    pairLFinset (insert (.atom x) u) = pairLFinset u := by
  ext t; simp only [mem_pairLFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

atomFinset_empty.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem atomFinset_empty : atomFinset (∅ : Finset (TreeToken α)) = ∅ := rfl

end InfoSys

end DomainTheory.InformationSystems
```

pairRFinset_insert_pairL.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairRFinset_insert_pairL (u : Finset (TreeToken α)) (t : TreeToken α) :
    pairRFinset (insert (.pairL t) u) = pairRFinset u := by
  ext s; simp only [mem_pairRFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys
```

```
end DomainTheory.InformationSystems
```

pairRFinset_singleton_atom.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairRFinset_singleton_atom (x : α) :
    pairRFinset ({.atom x} : Finset (TreeToken α)) = ∅ := by
  ext t
  constructor
  · intro ht
    exact False.elim (nomatch mem_pairRFinset.1 ht)
  · intro ht
    exact False.elim (Finset.notMem_empty t ht)

end InfoSys

end DomainTheory.InformationSystems
```

pairRFinset_insert_atom.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairRFinset_insert_atom (u : Finset (TreeToken α)) (x : α) :
    pairRFinset (insert (.atom x) u) = pairRFinset u := by
  ext t; simp only [mem_pairRFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

pairRFinset_insert_bot.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairRFinset_insert_bot (u : Finset (TreeToken α)) :
    pairRFinset (insert (.bot : TreeToken α) u) = pairRFinset u := by
  ext t; simp only [mem_pairRFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
```

```
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

pairRFinset_empty.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairRFinset_empty : pairRFinset (∅ : Finset (TreeToken α)) = ∅ := rfl

end InfoSys

end DomainTheory.InformationSystems
```

eq_singleton_bot_of_subset.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive
```

```
namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

omit [DecidableEq α] in

theorem eq_singleton_bot_of_subset {s : Finset (TreeToken α)}
    (hne : s = ∅) (hsub : s ⊆ {.bot}) : s = {.bot} := by
  ext y
  constructor
  · exact fun hy => hsub hy
  · intro hy
    have : y = .bot := Finset.mem_singleton.1 hy
    subst this
    obtain ⟨z, hz⟩ := Finset.nonempty_of_ne_empty hne
    have hzbot : z = .bot := Finset.mem_singleton.1 (hsub hz)
    exact hzbot ▸ hz

end InfoSys

end DomainTheory.InformationSystems
```

pairLFinset_empty.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairLFinset_empty : pairLFinset (∅ : Finset (TreeToken α)) = ∅ := rfl

end InfoSys

end DomainTheory.InformationSystems
```

pairRFinset_singleton_pairL.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairRFinset_singleton_pairL (t : TreeToken α) :
    pairRFinset ({.pairL t} : Finset (TreeToken α)) = ∅ := by
  ext s
  constructor
  · intro hs
    exact False.elim (nomatch mem_pairRFinset.1 hs)
  · intro hs
    exact False.elim (Finset.notMem_empty s hs)

end InfoSys

end DomainTheory.InformationSystems
```

pairRFinset_insert_pairR.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairRFinset

@[expose] public section
```

```
namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairRFinset_insert_pairR (u : Finset (TreeToken α)) (t : TreeToken α) :
    pairRFinset (insert (.pairR t) u) = insert t (pairRFinset u) := by
  ext s; simp only [Finset.mem_insert, mem_pairRFinset]
  constructor
  · rintro (h | h)
    · exact Or.inl (TreeToken.pairR.inj h)
    · exact Or.inr h
  · rintro (rfl | h)
    · exact Or.inl rfl
    · exact Or.inr h

end InfoSys

end DomainTheory.InformationSystems
```

pairRFinset_singleton_pairR.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairRFinset_singleton_pairR (t : TreeToken α) :
    pairRFinset ({.pairR t} : Finset (TreeToken α)) = {t} := by
  ext s; simp only [mem_pairRFinset, Finset.mem_singleton]
  exact ⟨fun h => TreeToken.pairR.inj h, fun h => congrArg TreeToken.pairR h⟩
```

```
end InfoSys

end DomainTheory.InformationSystems
```

mem_pairLFinset.lean

```
module

public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
```

pairLFinset_insert_bot.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairLFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairLFinset_insert_bot (u : Finset (TreeToken α)) :
    pairLFinset (insert (.bot : TreeToken α) u) = pairLFinset u := by
  ext t; simp only [mem_pairLFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

pairLFinset_singleton_atom.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairLFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairLFinset_singleton_atom (x : α) :
    pairLFinset ({.atom x} : Finset (TreeToken α)) = ∅ := by
  ext t
  constructor
  · intro ht
    exact False.elim (nomatch mem_pairLFinset.1 ht)
  · intro ht
    exact False.elim (Finset.notMem_empty t ht)

end InfoSys

end DomainTheory.InformationSystems
```

pairLFinset_insert_pairR.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairLFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive
```

```
namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairLFinset_insert_pairR (u : Finset (TreeToken α)) (t : TreeToken α) :
    pairLFinset (insert (.pairR t) u) = pairLFinset u := by
  ext s; simp only [mem_pairLFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

pairLFinset_insert_pairL.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairLFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairLFinset_insert_pairL (u : Finset (TreeToken α)) (t : TreeToken α) :
    pairLFinset (insert (.pairL t) u) = insert t (pairLFinset u) := by
  ext s; simp only [Finset.mem_insert, mem_pairLFinset]
  constructor
  · rintro (h | h)
    · exact Or.inl (TreeToken.pairL.inj h)
    · exact Or.inr h
  · rintro (rfl | h)
    · exact Or.inl rfl
    · exact Or.inr h

end InfoSys

end DomainTheory.InformationSystems
```

pairRFinset_mono.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairRFinset_mono {u v : Finset (TreeToken α)} (h : v ⊆ u) :
    pairRFinset v ⊆ pairRFinset u := fun _ ht => mem_pairRFinset.2 (h (mem_pairRFinset
    .1 ht))

end InfoSys

end DomainTheory.InformationSystems
```

pairLFinset_singleton_bot.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairLFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive
```

```
namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairLFinset_singleton_bot :
    pairLFinset ({.bot} : Finset (TreeToken α)) = ∅ := by
  ext t
  constructor
  · intro ht
    exact False.elim (nomatch mem_pairLFinset.1 ht)
  · intro ht
    exact False.elim (Finset.notMem_empty t ht)

end InfoSys

end DomainTheory.InformationSystems
```

mem_foldr_atom.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem mem_foldr_atom (s : Multiset (TreeToken α)) (x : α) :
    x ∈ Multiset.foldr atomInsert (∅ : Finset α) s ↔ ∃ p ∈ s, p = .atom x := by
  refine Multiset.induction_on s ?_ ?_
  · constructor
    · intro hx; exact False.elim (Finset.notMem_empty x hx)
    · rintro ⟨_, hp, _⟩; exact False.elim (by cases hp)
  · intro p t ih
    cases p with
    | atom a =>
      simp only [Multiset.foldr_cons, atomInsert, Finset.mem_insert, ih, Multiset.
    mem_cons]
      constructor
      · rintro (hx | ⟨q, hq, hq'⟩)
        · exact ⟨.atom a, Or.inl rfl, congrArg TreeToken.atom hx.symm⟩
```

```
        · exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · injection hq' with hx; exact Or.inl hx.symm
        · exact Or.inr ⟨q, hq, hq'⟩
    | bot | pairL _ | pairR _ =>
      simp only [Multiset.foldr_cons, atomInsert, id_eq, ih, Multiset.mem_cons]
      constructor
      · rintro ⟨q, hq, hq'⟩; exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · exact False.elim (nomatch hq')
        · exact ⟨q, hq, hq'⟩

end InfoSys

end DomainTheory.InformationSystems
```

mem_atomFinset.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_foldr_atom

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem mem_atomFinset {u : Finset (TreeToken α)} {x : α} :
    x ∈ atomFinset u ↔ .atom x ∈ u := by
  constructor
  · intro hx
    rcases (mem_foldr_atom u.1 x).1 hx with ⟨p, hp, hp'⟩
    subst hp'; exact Finset.mem_def.2 hp
  · intro hx
    exact (mem_foldr_atom u.1 x).2 ⟨.atom x, Finset.mem_def.1 hx, rfl⟩

end InfoSys
```

```
end DomainTheory.InformationSystems
```

atomFinset_insert_pairL.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_atomFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem atomFinset_insert_pairL (u : Finset (TreeToken α)) (t : TreeToken α) :
    atomFinset (insert (.pairL t) u) = atomFinset u := by
  ext x; simp only [mem_atomFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

atomFinset_insert_bot.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_atomFinset
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem atomFinset_insert_bot (u : Finset (TreeToken α)) :
    atomFinset (insert (.bot : TreeToken α) u) = atomFinset u := by
  ext x; simp only [mem_atomFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

atomFinset_singleton_pairR.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_atomFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem atomFinset_singleton_pairR (t : TreeToken α) :
    atomFinset ({.pairR t} : Finset (TreeToken α)) = ∅ := by
  ext x
  constructor
  · intro hx
    exact False.elim (nomatch mem_atomFinset.1 hx)
  · intro hx
    exact False.elim (Finset.notMem_empty x hx)
```

```
end InfoSys

end DomainTheory.InformationSystems
```

atomFinset_singleton_atom.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_atomFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem atomFinset_singleton_atom (x : α) :
    atomFinset ({.atom x} : Finset (TreeToken α)) = {x} := by
  ext y; simp only [mem_atomFinset, Finset.mem_singleton]
  exact ⟨fun h => TreeToken.atom.inj h, fun h => congrArg TreeToken.atom h⟩

end InfoSys

end DomainTheory.InformationSystems
```

atomFinset_singleton_pairL.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_atomFinset
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem atomFinset_singleton_pairL (t : TreeToken α) :
    atomFinset ({.pairL t} : Finset (TreeToken α)) = ∅ := by
  ext x
  constructor
  · intro hx
    exact False.elim (nomatch mem_atomFinset.1 hx)
  · intro hx
    exact False.elim (Finset.notMem_empty x hx)

end InfoSys

end DomainTheory.InformationSystems
```

TreeCon_insert_bot.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    atomFinset_insert_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset_insert_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset_insert_bot

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)
```

```
theorem TreeCon_insert_bot {u : Finset (TreeToken α)} (hu : TreeCon A u) :
    TreeCon A (insert .bot u) := by
  cases hu with
  | left _ hA hL hR =>
    exact TreeCon.left _
      (by rw [atomFinset_insert_bot]; exact hA)
      (by rw [pairLFinset_insert_bot]; exact hL)
      (by rw [pairRFinset_insert_bot]; exact hR)
  | right _ hA hL hR =>
    exact TreeCon.right _
      (by rw [atomFinset_insert_bot]; exact hA)
      (by rw [pairLFinset_insert_bot]; exact hL)
      (by rw [pairRFinset_insert_bot]; exact hR)

end InfoSys

end DomainTheory.InformationSystems
```

atomFinset_insert_atom.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_atomFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem atomFinset_insert_atom (u : Finset (TreeToken α)) (x : α) :
    atomFinset (insert (.atom x) u) = insert x (atomFinset u) := by
  ext y; simp only [Finset.mem_insert, mem_atomFinset]
  constructor
  · rintro (h | h)
    · exact Or.inl (TreeToken.atom.inj h)
    · exact Or.inr h
  · rintro (rfl | h)
    · exact Or.inl rfl
    · exact Or.inr h
```

```
end InfoSys

end DomainTheory.InformationSystems
```

atomFinset_singleton_bot.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_atomFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem atomFinset_singleton_bot :
    atomFinset ({.bot} : Finset (TreeToken α)) = ∅ := by
  ext x
  constructor
  · intro hx
    exact False.elim (nomatch mem_atomFinset.1 hx)
  · intro hx
    exact False.elim (Finset.notMem_empty x hx)

end InfoSys

end DomainTheory.InformationSystems
```

pairLFinset_singleton_pairR.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairLFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairLFinset_singleton_pairR (t : TreeToken α) :
    pairLFinset ({.pairR t} : Finset (TreeToken α)) = ∅ := by
  ext s
  constructor
  · intro hs
    exact False.elim (nomatch mem_pairLFinset.1 hs)
  · intro hs
    exact False.elim (Finset.notMem_empty s hs)

end InfoSys

end DomainTheory.InformationSystems
```

pairLFinset_mono.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairLFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairLFinset_mono {u v : Finset (TreeToken α)} (h : v ⊆ u) :
```

```
    pairLFinset v ⊆ pairLFinset u := fun _ ht => mem_pairLFinset.2 (h (mem_pairLFinset
    .1 ht))

end InfoSys

end DomainTheory.InformationSystems
```

pairLFinset_singleton_pairL.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairLFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairLFinset_singleton_pairL (t : TreeToken α) :
    pairLFinset ({.pairL t} : Finset (TreeToken α)) = {t} := by
  ext s; simp only [mem_pairLFinset, Finset.mem_singleton]
  exact ⟨fun h => TreeToken.pairL.inj h, fun h => congrArg TreeToken.pairL h⟩

end InfoSys

end DomainTheory.InformationSystems
```

TreeCon_empty.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    atomFinset_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset_empty

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem TreeCon_empty : TreeCon A (∅ : Finset (TreeToken α)) :=
  TreeCon.left _ (by rw [atomFinset_empty]; exact A.con_empty)
    pairLFinset_empty pairRFinset_empty

end InfoSys

end DomainTheory.InformationSystems
```

TreeCon_pairR_of_right.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    TreeCon_empty

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)
```

```
theorem TreeCon.pairR_of_right {u : Finset (TreeToken α)}
    (hu : TreeCon A u) (_hA : atomFinset u = ∅) : TreeCon A (pairRFinset u) := by
  cases hu with
  | left _ _ _ hR => rw [hR]; exact TreeCon_empty A
  | right _ _ _ hR => exact hR

end InfoSys

end DomainTheory.InformationSystems
```

TreeCon_pairL_of_right.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    TreeCon_empty

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem TreeCon.pairL_of_right {u : Finset (TreeToken α)}
    (hu : TreeCon A u) (_hA : atomFinset u = ∅) : TreeCon A (pairLFinset u) := by
  cases hu with
  | left _ _ hL _ => rw [hL]; exact TreeCon_empty A
  | right _ _ hL _ => exact hL

end InfoSys

end DomainTheory.InformationSystems
```

TreeEntPayload.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    TreeCon_pairL_of_right
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    TreeCon_pairR_of_right

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
variable (A : InfoSys α)

def TreeEntPayload (u : Finset (TreeToken α)) : TreeToken α → Prop
  | .bot => True
  | .atom x => atomFinset u = ∅ ∧ A.Ent (atomFinset u) x
  | .pairL t =>
      atomFinset u = ∅ ∧ TreeCon A (pairLFinset u) ∧ TreeCon A (pairRFinset u) ∧
        ((pairLFinset u = ∅ ∧ TreeEntPayload (pairLFinset u) t) ∨
          (t = .bot ∧ pairRFinset u = ∅))
  | .pairR t =>
      atomFinset u = ∅ ∧ TreeCon A (pairRFinset u) ∧ TreeCon A (pairLFinset u) ∧
        ((pairRFinset u = ∅ ∧ TreeEntPayload (pairRFinset u) t) ∨
          (t = .bot ∧ pairLFinset u = ∅))

theorem TreeEntPayload.of_mem {u : Finset (TreeToken α)} {p : TreeToken α}
    (hu : TreeCon A u) (hp : p ∈ u) : TreeEntPayload A u p := by
  induction p generalizing u with
  | bot => exact trivial
  | atom x =>
    have hx : x ∈ atomFinset u := mem_atomFinset.2 hp
    exact ⟨Finset.ne_empty_of_mem hx,
      A.ent_refl (TreeCon.atom_con_of_atoms A hu (Finset.ne_empty_of_mem hx)) hx⟩
  | pairL t ih =>
    have ht : t ∈ pairLFinset u := mem_pairLFinset.2 hp
    have hne := Finset.ne_empty_of_mem ht
    have hAt := TreeCon.atoms_empty_of_right A hu (Or.inl hne)
    exact ⟨hAt, TreeCon.pairL_of_right A hu hAt, TreeCon.pairR_of_right A hu hAt,
      Or.inl ⟨hne, ih (TreeCon.pairL_of_right A hu hAt) ht⟩⟩
  | pairR t ih =>
    have ht : t ∈ pairRFinset u := mem_pairRFinset.2 hp
```

```
    have hne := Finset.ne_empty_of_mem ht
    have hAt := TreeCon.atoms_empty_of_right A hu (Or.inr hne)
    exact ⟨hAt, TreeCon.pairR_of_right A hu hAt, TreeCon.pairL_of_right A hu hAt,
      Or.inl ⟨hne, ih (TreeCon.pairR_of_right A hu hAt) ht⟩⟩

theorem TreeEntPayload.of_no_atoms_no_pairs {u : Finset (TreeToken α)} {t : TreeToken
    α}
    (hAt : atomFinset u = ∅) (hL : pairLFinset u = ∅) (hR : pairRFinset u = ∅)
    (h : TreeEntPayload A u t) : t = .bot := by
  cases t with
  | bot => rfl
  | atom x => exact False.elim (h.1 hAt)
  | pairL t =>
    rcases h with ⟨_, _, _, hOr⟩
    rcases hOr with ⟨hne, _⟩ | ⟨_, hRne⟩
    · exact False.elim (hne hL)
    · exact False.elim (hRne hR)
  | pairR t =>
    rcases h with ⟨_, _, _, hOr⟩
    rcases hOr with ⟨hne, _⟩ | ⟨_, hLne⟩
    · exact False.elim (hne hR)
    · exact False.elim (hLne hL)

end InfoSys

end DomainTheory.InformationSystems
```

TreeEnt.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    TreeEntPayload

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
variable (A : InfoSys α)

def TreeEnt (u : Finset (TreeToken α)) (p : TreeToken α) : Prop :=
```

```
  TreeCon A u ∧ TreeEntPayload A u p

theorem TreeEnt.of_mem {u : Finset (TreeToken α)} {p : TreeToken α}
    (hu : TreeCon A u) (hp : p ∈ u) : TreeEnt A u p :=
  ⟨hu, TreeEntPayload.of_mem A hu hp⟩

end InfoSys

end DomainTheory.InformationSystems
```

pairL_ne_or_subset_bot.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeEnt

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem pairL_ne_or_subset_bot {u v : Finset (TreeToken α)}
    (hEnts : ∀ y ∈ pairLFinset u, TreeEnt A v (.pairL y)) :
    pairLFinset v = ∅ ∨ pairLFinset u ⊆ {.bot} := by
  revert hEnts
  induction pairLFinset u using Finset.induction with
  | empty =>
    intro; exact Or.inr (Finset.empty_subset _)
  | insert y s hys ih =>
    intro hEnts
    have hy := hEnts y (Finset.mem_insert_self _ _)
    rcases hy.2.2.2.2 with ⟨hneV, _⟩ | ⟨rfl, _⟩
    · exact Or.inl hneV
    · rcases ih (fun z hz => hEnts z (Finset.mem_insert_of_mem hz)) with h | hsub
      · exact Or.inl h
      · refine Or.inr ?_
        intro z hz
        rcases Finset.mem_insert.1 hz with rfl | hz
        · exact Finset.mem_singleton_self _
```

```
        · exact hsub hz

end InfoSys

end DomainTheory.InformationSystems
```

pairR_ne_or_subset_bot.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeEnt

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem pairR_ne_or_subset_bot {u v : Finset (TreeToken α)}
    (hEnts : ∀ y ∈ pairRFinset u, TreeEnt A v (.pairR y)) :
    pairRFinset v = ∅ ∨ pairRFinset u ⊆ {.bot} := by
  revert hEnts
  induction pairRFinset u using Finset.induction with
  | empty =>
    intro; exact Or.inr (Finset.empty_subset _)
  | insert y s hys ih =>
    intro hEnts
    have hy := hEnts y (Finset.mem_insert_self _ _)
    rcases hy.2.2.2.2 with ⟨hneV, _⟩ | ⟨rfl, _⟩
    · exact Or.inl hneV
    · rcases ih (fun z hz => hEnts z (Finset.mem_insert_of_mem hz)) with h | hsub
      · exact Or.inl h
      · refine Or.inr ?_
        intro z hz
        rcases Finset.mem_insert.1 hz with rfl | hz
        · exact Finset.mem_singleton_self _
        · exact hsub hz

end InfoSys
```

```
end DomainTheory.InformationSystems
```

atomFinset_mono.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_atomFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem atomFinset_mono {u v : Finset (TreeToken α)} (h : v ⊆ u) :
    atomFinset v ⊆ atomFinset u := fun _ hx => mem_atomFinset.2 (h (mem_atomFinset.1
    hx))

end InfoSys

end DomainTheory.InformationSystems
```

TreeCon_subset.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    atomFinset_mono
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset_mono
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset_mono
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem TreeCon_subset {u : Finset (TreeToken α)} (hu : TreeCon A u) :
    ∀ {v}, v ⊆ u → TreeCon A v := by
  induction hu with
  | left u hA hL hR =>
    intro v hv
    refine TreeCon.left v (A.con_subset hA (atomFinset_mono hv)) ?_ ?_
    · exact Finset.Subset.antisymm
        (fun t ht => by
          have : t ∈ pairLFinset u := pairLFinset_mono hv ht
          rw [hL] at this; exact False.elim (Finset.notMem_empty t this))
        (Finset.empty_subset _)
    · exact Finset.Subset.antisymm
        (fun t ht => by
          have : t ∈ pairRFinset u := pairRFinset_mono hv ht
          rw [hR] at this; exact False.elim (Finset.notMem_empty t this))
        (Finset.empty_subset _)
  | right u hA hL hR ihL ihR =>
    intro v hv
    refine TreeCon.right v
      (Finset.Subset.antisymm
        (fun x hx => by
          have : x ∈ atomFinset u := atomFinset_mono hv hx
          rw [hA] at this; exact False.elim (Finset.notMem_empty x this))
        (Finset.empty_subset _))
      (ihL (pairLFinset_mono hv)) (ihR (pairRFinset_mono hv))

end InfoSys

end DomainTheory.InformationSystems
```

treeBot.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
```

```
    pairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

def treeBot : TreeToken α := .bot

end InfoSys

end DomainTheory.InformationSystems
```

atomFinset_insert_pairR.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_atomFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem atomFinset_insert_pairR (u : Finset (TreeToken α)) (t : TreeToken α) :
    atomFinset (insert (.pairR t) u) = atomFinset u := by
  ext x; simp only [mem_atomFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

TreeCon_insert_of_ent.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    atomFinset_insert_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    atomFinset_insert_pairL
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    atomFinset_insert_pairR
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset_insert_pairL
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset_insert_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset_insert_pairR
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset_insert_pairR
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset_insert_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset_insert_pairL
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    TreeCon_insert_bot

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem TreeCon_insert_of_ent {u : Finset (TreeToken α)} {p : TreeToken α}
    (h : TreeEnt A u p) : TreeCon A (insert p u) := by
  induction p generalizing u with
  | bot =>
    exact TreeCon_insert_bot A h.1
  | atom x =>
    rcases h with ⟨hu, hne, hA⟩
    have hLR := TreeCon.pairs_empty_of_left A hu hne
    exact TreeCon.left _
```

```
      (by rw [atomFinset_insert_atom]; exact A.ent_con hA)
      (by rw [pairLFinset_insert_atom]; exact hLR.1)
      (by rw [pairRFinset_insert_atom]; exact hLR.2)
  | pairL t ih =>
    rcases h with ⟨_, hAt, hConL, hConR, hOr⟩
    refine TreeCon.right _
      (by rw [atomFinset_insert_pairL]; exact hAt) ?_
      (by rw [pairRFinset_insert_pairL]; exact hConR)
    rw [pairLFinset_insert_pairL]
    rcases hOr with ⟨_, hPay⟩ | ⟨rfl, _⟩
    · exact ih ⟨hConL, hPay⟩
    · exact TreeCon_insert_bot A hConL
  | pairR t ih =>
    rcases h with ⟨_, hAt, hConR, hConL, hOr⟩
    refine TreeCon.right _
      (by rw [atomFinset_insert_pairR]; exact hAt)
      (by rw [pairLFinset_insert_pairR]; exact hConL) ?_
    rw [pairRFinset_insert_pairR]
    rcases hOr with ⟨_, hPay⟩ | ⟨rfl, _⟩
    · exact ih ⟨hConR, hPay⟩
    · exact TreeCon_insert_bot A hConR

end InfoSys

end DomainTheory.InformationSystems
```

pairRFinset_singleton_bot.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem pairRFinset_singleton_bot :
    pairRFinset ({.bot} : Finset (TreeToken α)) = ∅ := by
  ext t
```

```
  constructor
  · intro ht
    exact False.elim (nomatch mem_pairRFinset.1 ht)
  · intro ht
    exact False.elim (Finset.notMem_empty t ht)

end InfoSys

end DomainTheory.InformationSystems
```

TreeEntPayload_trans.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    mem_pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    atomFinset_singleton_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset_singleton_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset_singleton_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    TreeEntPayload
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairL_ne_or_subset_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairR_ne_or_subset_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    eq_singleton_bot_of_subset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    TreeCon_pairL_of_right
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    TreeCon_pairR_of_right

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive
```

```
namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem TreeEntPayload_trans {u v : Finset (TreeToken α)} {c : TreeToken α}
    (hv : TreeCon A v) (hu : TreeCon A u)
    (hEnts : ∀ y ∈ u, TreeEnt A v y) (hPay : TreeEntPayload A u c) :
    TreeEntPayload A v c := by
  induction c generalizing u v with
  | bot => exact trivial
  | atom x =>
    rcases hPay with ⟨hne, hA⟩
    have hlft : ∀ y ∈ atomFinset u, A.Ent (atomFinset v) y := by
      intro y hy
      exact (hEnts _ (mem_atomFinset.1 hy)).2.2
    have hne' : atomFinset v = ∅ := by
      obtain ⟨y, hy⟩ := Finset.nonempty_of_ne_empty hne
      exact (hEnts _ (mem_atomFinset.1 hy)).2.1
    exact ⟨hne', A.ent_trans (TreeCon.atom_con_of_atoms A hv hne')
      (TreeCon.atom_con_of_atoms A hu hne) hlft hA⟩
  | pairL t ih =>
    rcases hPay with ⟨hAt, hConL, hConR, hOr⟩
    rcases hOr with ⟨hne, hPayL⟩ | ⟨rfl, hRne⟩
    · obtain ⟨s, hs⟩ := Finset.nonempty_of_ne_empty hne
      have hEy := hEnts _ (mem_pairLFinset.1 hs)
      have hAtv : atomFinset v = ∅ := hEy.2.1
      have hConLv : TreeCon A (pairLFinset v) := TreeCon.pairL_of_right A hv hAtv
      have hConRv : TreeCon A (pairRFinset v) := hEy.2.2.2.1
      have hEntsL : ∀ y ∈ pairLFinset u, TreeEnt A (pairLFinset v) y := by
        intro y hy
        have hEy' := hEnts _ (mem_pairLFinset.1 hy)
        rcases hEy'.2.2.2.2 with ⟨_, hPay'⟩ | ⟨rfl, _⟩
        · exact ⟨hEy'.2.2.1, hPay'⟩
        · exact ⟨hConLv, trivial⟩
      refine ⟨hAtv, hConLv, hConRv, ?_⟩
      have hEntsPair : ∀ y ∈ pairLFinset u, TreeEnt A v (.pairL y) :=
        fun y hy => hEnts _ (mem_pairLFinset.1 hy)
      rcases pairL_ne_or_subset_bot A hEntsPair with hneV | hsub
      · exact Or.inl ⟨hneV, ih hConLv hConL hEntsL hPayL⟩
      · have huBot : pairLFinset u = {.bot} :=
          eq_singleton_bot_of_subset hne hsub
        have ht : t = .bot :=
          TreeEntPayload.of_no_atoms_no_pairs A
            atomFinset_singleton_bot pairLFinset_singleton_bot
            pairRFinset_singleton_bot (huBot ▸ hPayL)
        rcases hEy.2.2.2.2 with ⟨hneV, _⟩ | ⟨_, hR⟩
        · exact Or.inl ⟨hneV, ih hConLv hConL hEntsL hPayL⟩
        · exact Or.inr ⟨ht, hR⟩
    · obtain ⟨s, hs⟩ := Finset.nonempty_of_ne_empty hRne
      have hEy := hEnts _ (mem_pairRFinset.1 hs)
      have hAtv : atomFinset v = ∅ := hEy.2.1
      refine ⟨hAtv, TreeCon.pairL_of_right A hv hAtv, hEy.2.2.1, ?_⟩
      rcases hEy.2.2.2.2 with ⟨hneR, _⟩ | ⟨_, hneL⟩
      · exact Or.inr ⟨rfl, hneR⟩
```

```
      · exact Or.inl ⟨hneL, trivial⟩
  | pairR t ih =>
    rcases hPay with ⟨hAt, hConR, hConL, hOr⟩
    rcases hOr with ⟨hne, hPayR⟩ | ⟨rfl, hLne⟩
    · obtain ⟨s, hs⟩ := Finset.nonempty_of_ne_empty hne
      have hEy := hEnts _ (mem_pairRFinset.1 hs)
      have hAtv : atomFinset v = ∅ := hEy.2.1
      have hConRv : TreeCon A (pairRFinset v) := TreeCon.pairR_of_right A hv hAtv
      have hConLv : TreeCon A (pairLFinset v) := hEy.2.2.2.1
      have hEntsR : ∀ y ∈ pairRFinset u, TreeEnt A (pairRFinset v) y := by
        intro y hy
        have hEy' := hEnts _ (mem_pairRFinset.1 hy)
        rcases hEy'.2.2.2.2 with ⟨_, hPay'⟩ | ⟨rfl, _⟩
        · exact ⟨hEy'.2.2.1, hPay'⟩
        · exact ⟨hConRv, trivial⟩
      refine ⟨hAtv, hConRv, hConLv, ?_⟩
      have hEntsPair : ∀ y ∈ pairRFinset u, TreeEnt A v (.pairR y) :=
        fun y hy => hEnts _ (mem_pairRFinset.1 hy)
      rcases pairR_ne_or_subset_bot A hEntsPair with hneV | hsub
      · exact Or.inl ⟨hneV, ih hConRv hConR hEntsR hPayR⟩
      · have huBot : pairRFinset u = {.bot} :=
          eq_singleton_bot_of_subset hne hsub
        have ht : t = .bot :=
          TreeEntPayload.of_no_atoms_no_pairs A
            atomFinset_singleton_bot pairLFinset_singleton_bot
            pairRFinset_singleton_bot (huBot ▸ hPayR)
        rcases hEy.2.2.2.2 with ⟨hneV, _⟩ | ⟨_, hL⟩
        · exact Or.inl ⟨hneV, ih hConRv hConR hEntsR hPayR⟩
        · exact Or.inr ⟨ht, hL⟩
    · obtain ⟨s, hs⟩ := Finset.nonempty_of_ne_empty hLne
      have hEy := hEnts _ (mem_pairLFinset.1 hs)
      have hAtv : atomFinset v = ∅ := hEy.2.1
      refine ⟨hAtv, TreeCon.pairR_of_right A hv hAtv, hEy.2.2.1, ?_⟩
      rcases hEy.2.2.2.2 with ⟨hneL, _⟩ | ⟨_, hneR⟩
      · exact Or.inr ⟨rfl, hneL⟩
      · exact Or.inl ⟨hneR, trivial⟩

end InfoSys

end DomainTheory.InformationSystems
```

TreeEnt_trans.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeEnt
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    TreeEntPayload_trans

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem TreeEnt_trans {u v : Finset (TreeToken α)} {c : TreeToken α}
    (hv : TreeCon A v) (hu : TreeCon A u)
    (hEnts : ∀ y ∈ u, TreeEnt A v y) (hEntc : TreeEnt A u c) :
    TreeEnt A v c :=
  ⟨hv, TreeEntPayload_trans A hv hu hEnts hEntc.2⟩

end InfoSys

end DomainTheory.InformationSystems
```

TreeCon_singleton.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    atomFinset_singleton_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset_singleton_pairL
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset_singleton_pairR
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    atomFinset_singleton_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset_singleton_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset_singleton_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset_singleton_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset_singleton_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
```

```
    atomFinset_singleton_pairL
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    atomFinset_singleton_pairR
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset_singleton_pairL
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset_singleton_pairR
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    TreeCon_empty

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem TreeCon_singleton (p : TreeToken α) : TreeCon A {p} := by
  induction p with
  | bot =>
    exact TreeCon.left _
      (by rw [atomFinset_singleton_bot]; exact A.con_empty)
      pairLFinset_singleton_bot pairRFinset_singleton_bot
  | atom x =>
    exact TreeCon.left _
      (by rw [atomFinset_singleton_atom]; exact A.con_sing x)
      (pairLFinset_singleton_atom x) (pairRFinset_singleton_atom x)
  | pairL t ih =>
    exact TreeCon.right _
      (atomFinset_singleton_pairL t)
      (by rw [pairLFinset_singleton_pairL]; exact ih)
      (by rw [pairRFinset_singleton_pairL]; exact TreeCon_empty A)
  | pairR t ih =>
    exact TreeCon.right _
      (atomFinset_singleton_pairR t)
      (by rw [pairLFinset_singleton_pairR]; exact TreeCon_empty A)
      (by rw [pairRFinset_singleton_pairR]; exact ih)

end InfoSys

end DomainTheory.InformationSystems
```

treeSystem.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.treeBot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    TreeCon_singleton
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    TreeCon_insert_of_ent
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    TreeEnt_trans
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    TreeCon_subset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def treeSystem : InfoSys (TreeToken α) where
  bot := treeBot
  Con := {u | TreeCon A u}
  Ent := TreeEnt A
  con_subset := fun hu hv => TreeCon_subset A hu hv
  con_sing := TreeCon_singleton A
  ent_con := fun h => TreeCon_insert_of_ent A h
  ent_bot := fun hu => ⟨hu, trivial⟩
  ent_refl := fun hu hp => TreeEnt.of_mem A hu hp
  ent_trans := fun hv hu hEnts hEntc => TreeEnt_trans A hv hu hEnts hEntc

end InfoSys

end DomainTheory.InformationSystems
```

treeUnfold.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
```

```
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.treeBot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.treeSystem

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
variable (A : InfoSys α)

def treeUnfold (t : TreeToken α) :
    SumToken α (ProdToken (treeSystem A) (treeSystem A)) :=
  match t with
  | .bot => .bot
  | .atom x => .left x
  | .pairL t => .right ⟨(t, treeBot), ⟨Or.inr rfl⟩⟩
  | .pairR t => .right ⟨(treeBot, t), ⟨Or.inl rfl⟩⟩

theorem treeUnfold.atom (x : α) : treeUnfold A (.atom x) = SumToken.left x := rfl

theorem treeUnfold.bot : treeUnfold A treeBot = SumToken.bot := rfl

theorem treeUnfold.pairL (t : TreeToken α) :
    treeUnfold A (.pairL t) = .right ⟨(t, treeBot), ⟨Or.inr rfl⟩⟩ := rfl

theorem treeUnfold.pairR (t : TreeToken α) :
    treeUnfold A (.pairR t) = .right ⟨(treeBot, t), ⟨Or.inl rfl⟩⟩ := rfl

theorem treeUnfold.pairL_bot_eq_pairR_bot :
    treeUnfold A (.pairL treeBot) = treeUnfold A (.pairR treeBot) := rfl

end InfoSys

end DomainTheory.InformationSystems
```

treeRhs.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.TreeCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.atomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.
    pairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.treeSystem
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
variable (A : InfoSys α)

def treeRhs : InfoSys (SumToken α (ProdToken (treeSystem A) (treeSystem A))) :=
  sumSystem A (productSystem (treeSystem A) (treeSystem A))

theorem treeRhs.eq_sum_product :
    treeRhs A = sumSystem A (productSystem (treeSystem A) (treeSystem A)) :=
  rfl

end InfoSys

end DomainTheory.InformationSystems
```

Factoid81.lean

```
module

public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid81.treeRhs

@[expose] public section

namespace DomainTheory.InformationSystems.InfoSys

set_option linter.unusedVariables false

theorem theorem_81.{u_1} : ∀ {α : Type u_1} [inst : DecidableEq α] (A : @DomainTheory.
    InformationSystems.InfoSys α inst),
  @Eq
    (@DomainTheory.InformationSystems.InfoSys
      (DomainTheory.InformationSystems.InfoSys.SumToken α
        (@DomainTheory.InformationSystems.InfoSys.ProdToken (DomainTheory.
    InformationSystems.InfoSys.TreeToken α)
          (DomainTheory.InformationSystems.InfoSys.TreeToken α)
          (fun (a b : DomainTheory.InformationSystems.InfoSys.TreeToken α) =>
            @DomainTheory.InformationSystems.InfoSys.instDecidableEqTreeToken α inst a
     b)
          (fun (a b : DomainTheory.InformationSystems.InfoSys.TreeToken α) =>
            @DomainTheory.InformationSystems.InfoSys.instDecidableEqTreeToken α inst a
     b)
          (@DomainTheory.InformationSystems.InfoSys.treeSystem α inst A)
          (@DomainTheory.InformationSystems.InfoSys.treeSystem α inst A)))
      fun
        (a b :
          DomainTheory.InformationSystems.InfoSys.SumToken α
            (@DomainTheory.InformationSystems.InfoSys.ProdToken (DomainTheory.
    InformationSystems.InfoSys.TreeToken α)
```

```
          (DomainTheory.InformationSystems.InfoSys.TreeToken α)
          (fun (a b : DomainTheory.InformationSystems.InfoSys.TreeToken α) =>
            @DomainTheory.InformationSystems.InfoSys.instDecidableEqTreeToken α
inst a b)
          (fun (a b : DomainTheory.InformationSystems.InfoSys.TreeToken α) =>
            @DomainTheory.InformationSystems.InfoSys.instDecidableEqTreeToken α
inst a b)
          (@DomainTheory.InformationSystems.InfoSys.treeSystem α inst A)
          (@DomainTheory.InformationSystems.InfoSys.treeSystem α inst A))) =>
  @DomainTheory.InformationSystems.InfoSys.instDecidableEqSumToken α
    (@DomainTheory.InformationSystems.InfoSys.ProdToken (DomainTheory.
InformationSystems.InfoSys.TreeToken α)
      (DomainTheory.InformationSystems.InfoSys.TreeToken α)
      (fun (a b : DomainTheory.InformationSystems.InfoSys.TreeToken α) =>
        @DomainTheory.InformationSystems.InfoSys.instDecidableEqTreeToken α inst a
 b)
      (fun (a b : DomainTheory.InformationSystems.InfoSys.TreeToken α) =>
        @DomainTheory.InformationSystems.InfoSys.instDecidableEqTreeToken α inst a
 b)
      (@DomainTheory.InformationSystems.InfoSys.treeSystem α inst A)
      (@DomainTheory.InformationSystems.InfoSys.treeSystem α inst A))
    inst
    (@DomainTheory.InformationSystems.InfoSys.instDecidableEqProdToken
      (DomainTheory.InformationSystems.InfoSys.TreeToken α) (DomainTheory.
InformationSystems.InfoSys.TreeToken α)
      (fun (a b : DomainTheory.InformationSystems.InfoSys.TreeToken α) =>
        @DomainTheory.InformationSystems.InfoSys.instDecidableEqTreeToken α inst a
 b)
      (fun (a b : DomainTheory.InformationSystems.InfoSys.TreeToken α) =>
        @DomainTheory.InformationSystems.InfoSys.instDecidableEqTreeToken α inst a
 b)
      (@DomainTheory.InformationSystems.InfoSys.treeSystem α inst A)
      (@DomainTheory.InformationSystems.InfoSys.treeSystem α inst A))
    a b)
(@DomainTheory.InformationSystems.InfoSys.treeRhs α inst A)
(@DomainTheory.InformationSystems.InfoSys.sumSystem α
  (@DomainTheory.InformationSystems.InfoSys.ProdToken (DomainTheory.
InformationSystems.InfoSys.TreeToken α)
    (DomainTheory.InformationSystems.InfoSys.TreeToken α)
    (fun (a b : DomainTheory.InformationSystems.InfoSys.TreeToken α) =>
      @DomainTheory.InformationSystems.InfoSys.instDecidableEqTreeToken α inst a b
)
    (fun (a b : DomainTheory.InformationSystems.InfoSys.TreeToken α) =>
      @DomainTheory.InformationSystems.InfoSys.instDecidableEqTreeToken α inst a b
)
    (@DomainTheory.InformationSystems.InfoSys.treeSystem α inst A)
    (@DomainTheory.InformationSystems.InfoSys.treeSystem α inst A))
  inst
  (@DomainTheory.InformationSystems.InfoSys.instDecidableEqProdToken
    (DomainTheory.InformationSystems.InfoSys.TreeToken α) (DomainTheory.
InformationSystems.InfoSys.TreeToken α)
    (fun (a b : DomainTheory.InformationSystems.InfoSys.TreeToken α) =>
      @DomainTheory.InformationSystems.InfoSys.instDecidableEqTreeToken α inst a b
)
    (fun (a b : DomainTheory.InformationSystems.InfoSys.TreeToken α) =>
      @DomainTheory.InformationSystems.InfoSys.instDecidableEqTreeToken α inst a b
```

```
  )
       (@DomainTheory.InformationSystems.InfoSys.treeSystem α inst A)
       (@DomainTheory.InformationSystems.InfoSys.treeSystem α inst A))
     A
     (@DomainTheory.InformationSystems.InfoSys.productSystem (DomainTheory.
  InformationSystems.InfoSys.TreeToken α)
       (DomainTheory.InformationSystems.InfoSys.TreeToken α)
       (fun (a b : DomainTheory.InformationSystems.InfoSys.TreeToken α) =>
         @DomainTheory.InformationSystems.InfoSys.instDecidableEqTreeToken α inst a b
  )
       (fun (a b : DomainTheory.InformationSystems.InfoSys.TreeToken α) =>
         @DomainTheory.InformationSystems.InfoSys.instDecidableEqTreeToken α inst a b
  )
       (@DomainTheory.InformationSystems.InfoSys.treeSystem α inst A)
       (@DomainTheory.InformationSystems.InfoSys.treeSystem α inst A))) :=
@DomainTheory.InformationSystems.InfoSys.treeRhs.eq_sum_product

end DomainTheory.InformationSystems.InfoSys
```

4.8.2 Factoid 8.2

A domain for λ-claculus. A lengthy discussion with many references on λ-calculus models can be found in Longo [1982]. All we wish to remark on here is how the method of construction by solving a domain equation can be fit into the new presentation. What I have added to the previous ideas (that in any case came out of an analysis of finite elements of models) is the general view of information systems. In particular the models obtained this way are *not* lattices—hence, the need for the calculations with Con. I hope that the presentation here makes it clearer how "pure" λ-calculus models can be related to other domains having other types of structures—for instance, those needed in denotational semantics.

The domain equation we wish to solve is:

$$\mathbf{D} \cong \mathbf{A} + (\mathbf{D} \to \mathbf{D}).$$

We proceed in much the same way we did for $\mathbf{T}$, except we must now put in data objects appropriate to the function space. Here is construction, where again Δ is chosen outside $D_{\mathbf{A}}$ and $\Delta_{\mathbf{D}} = (\Delta, \Delta)$:

(1) $\Delta_{\mathbf{D}} \in D_{\mathbf{D}}$;

(2) $(X, \Delta) \in D_{\mathbf{D}}$ whenever $X \in D_{\mathbf{A}}$;

(3) $(\Delta, (u, v)) \in D_{\mathbf{D}}$ whenever $u, v \in \mathrm{Con}_{\mathbf{D}}$;

(4) $\emptyset \in \mathrm{Con}_{\mathbf{D}}$;

(5) $u \cup \{\Delta_{\mathbf{D}}\} \in \mathrm{Con}_{\mathbf{D}}$ whenever $u \in \mathrm{Con}_{\mathbf{D}}$;

(6) $\{(X, \Delta) \mid X \in w\} \in \mathrm{Con}_{\mathbf{D}}$ whenever $w \in \mathrm{Con}_{\mathbf{A}}$; and

(7) $\{(\Delta, (u_0, v_0)), \ldots, (\Delta, (u_{n-1}, v_{n-1}))\} \in \mathrm{Con}_{\mathbf{D}}$ provided $u_i, v_i \in \mathrm{Con}_{\mathbf{D}}$ for all $i < n$ and whenever $I \subseteq \{0, \ldots, n-1\}$ and $\bigcup\{u_i \mid i \in I\} \in \mathrm{Con}_{\mathbf{D}}$, then $\bigcup\{v_i \mid i \in I\} \in \mathrm{Con}_{\mathbf{D}}$.

What is different here from the definition of $\mathbf{T}$ is the fact that the concepts $D_{\mathbf{D}}$ and $\mathrm{Con}_{\mathbf{D}}$ are mutually recursive because the data objects are themselves built from consistent sets. The scheme is based on a combination of the sum construct and the function-space construct, but the mutual recursion allows "feedback" to occur.

To complete the definition we have to give the clauses for the inductive definition of entailment. They are:

(8) $u \vdash_{\mathbf{D}} \Delta_{\mathbf{D}}$ always;

(9) $u \cup \{\Delta_{\mathbf{D}}\} \vdash_{\mathbf{D}} Y$ whenever $u \vdash_{\mathbf{D}} Y$;

(10) $\{(X, \Delta) \mid X \in w\} \vdash_{\mathbf{D}} (W, \Delta)$ whenever $w \vdash_{\mathbf{A}} W$;

(11) $\{(\Delta, (u_0, v_0)), \ldots, (\Delta, (u_{n-1}, v_{n-1}))\} \vdash_{\mathbf{D}} (\Delta, (u', v'))$ whenever $\bigcup\{v_i \mid u' \vdash_{\mathbf{D}} u_i\} \vdash_{\mathbf{D}} v'$ and the set on the left is in $\mathrm{Con}_{\mathbf{D}}$.

Obviously these definitions are much shorter if we have a domain in which all sets are consistent, but there are many reasons for retaining the consistency concept throughout. The check that $\mathbf{D}$ is an information system and satisfies the domain equation is mechanical. We cannot detail here how this construction provides a λ-calculus model.

It is clear that these definitions are constructive, and that, with a suitable Gödel numbering of the data objects, the predicates for consistency and entailment are recursively enumerable. However, the recursion used builds up the predicates by going from less complicated data objects to more complicated ones; therefore, the predicates must be recursive, because, for a certain size data object, the derivation that puts it into the predicate is of a bounded length. This observation helps in the discussion of the computability of the operators defined on these domains—another topic we cannot discuss here. ■

RawLamToken.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

inductive RawLamToken (α : Type*) where
  | bot : RawLamToken α
  | atom : α → RawLamToken α
  | funTok : List (RawLamToken α) → List (RawLamToken α) → RawLamToken α

mutual
  def rawLamBEq : RawLamToken α → RawLamToken α → Bool
```

```
    | .bot, .bot => true
    | .atom x, .atom y => decide (x = y)
    | .funTok u v, .funTok u' v' => rawLamListBEq u u' && rawLamListBEq v v'
    | _, _ => false
  def rawLamListBEq : List (RawLamToken α) → List (RawLamToken α) → Bool
    | [], [] => true
    | x :: xs, y :: ys => rawLamBEq x y && rawLamListBEq xs ys
    | _, _ => false
end

mutual
  theorem rawLamBEq_eq : ∀ a b : RawLamToken α, rawLamBEq a b = true ↔ a = b
  | .bot, .bot => by simp [rawLamBEq]
  | .atom x, .atom y => by
      simp only [rawLamBEq, decide_eq_true_eq]
      exact ⟨congrArg RawLamToken.atom, RawLamToken.atom.inj⟩
  | .funTok u v, .funTok u' v' => by
      simp only [rawLamBEq, Bool.and_eq_true]
      constructor
      · intro ⟨hu, hv⟩
        rw [(rawLamListBEq_eq u u').1 hu, (rawLamListBEq_eq v v').1 hv]
      · intro h
        injection h with hu hv
        subst hu; subst hv
        exact ⟨(rawLamListBEq_eq u u).2 rfl, (rawLamListBEq_eq v v).2 rfl⟩
  | .bot, .atom _ | .bot, .funTok _ _ | .atom _, .bot | .atom _, .funTok _ _
  | .funTok _ _, .bot | .funTok _ _, .atom _ => by
      constructor
      · intro h; simp [rawLamBEq] at h
      · intro h; cases h
  theorem rawLamListBEq_eq : ∀ u v : List (RawLamToken α), rawLamListBEq u v = true ↔
    u = v
  | [], [] => by simp [rawLamListBEq]
  | x :: xs, y :: ys => by
      simp only [rawLamListBEq, Bool.and_eq_true]
      constructor
      · intro ⟨hx, hxs⟩
        rw [(rawLamBEq_eq x y).1 hx, (rawLamListBEq_eq xs ys).1 hxs]
      · intro h
        injection h with hx hxs
        subst hx; subst hxs
        exact ⟨(rawLamBEq_eq x x).2 rfl, (rawLamListBEq_eq xs xs).2 rfl⟩
  | [], _ :: _ | _ :: _, [] => by
      constructor
      · intro h; simp [rawLamListBEq] at h
      · intro h; cases h
end

instance : DecidableEq (RawLamToken α) := fun a b =>
  if h : rawLamBEq a b = true then isTrue ((rawLamBEq_eq a b).1 h)
  else isFalse fun hab => h ((rawLamBEq_eq a b).2 hab)

end InfoSys
end DomainTheory.InformationSystems
```

lamFunInsert.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamFunInsert :
    RawLamToken α → Finset (List (RawLamToken α) × List (RawLamToken α)) →
      Finset (List (RawLamToken α) × List (RawLamToken α))
  | .funTok u v => insert (u, v)
  | .bot | .atom _ => id

end InfoSys

end DomainTheory.InformationSystems
```

lamAtomInsert.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamAtomInsert : RawLamToken α → Finset α → Finset α
  | .atom x => insert x
```

```
  | .bot | .funTok _ _ => id

end InfoSys

end DomainTheory.InformationSystems
```

LamEntDepthInst9.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomInsert

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

instance : LeftCommutative (lamAtomInsert : RawLamToken α → Finset α → Finset α) :=
  ⟨fun p q s => by cases p <;> cases q <;> first | exact insert_comm' _ _ s | rfl⟩

end InfoSys

end DomainTheory.InformationSystems
```

listToFinset.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys
```

```
variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def listToFinset {β : Type*} [DecidableEq β] : List β → Finset β
  | [] => ∅
  | x :: xs => insert x (listToFinset xs)

end InfoSys

end DomainTheory.InformationSystems
```

LamEntDepthInst10.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

instance : LeftCommutative
    (lamFunInsert : RawLamToken α →
      Finset (List (RawLamToken α) × List (RawLamToken α)) →
        Finset (List (RawLamToken α) × List (RawLamToken α))) :=
  ⟨fun p q s => by cases p <;> cases q <;> first | exact insert_comm' _ _ s | rfl⟩

end InfoSys

end DomainTheory.InformationSystems
```

lamFunFinset.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamFunFinset (u : Finset (RawLamToken α)) :
    Finset (List (RawLamToken α) × List (RawLamToken α)) :=
  Multiset.foldr lamFunInsert ∅ u.1

end InfoSys

end DomainTheory.InformationSystems
```

mem_lamFunFinset.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys
```

```
variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem mem_lamFunFinset {u : Finset (RawLamToken α)}
    {p : List (RawLamToken α) × List (RawLamToken α)} :
    p ∈ lamFunFinset u ↔ .funTok p.1 p.2 ∈ u := by
  have aux (s : Multiset (RawLamToken α)) :
      p ∈ Multiset.foldr lamFunInsert ∅ s ↔ ∃ t ∈ s, t = .funTok p.1 p.2 := by
    refine Multiset.induction_on s ?_ ?_
    · constructor
      · intro hp; exact False.elim (Finset.notMem_empty p hp)
      · rintro ⟨_, ht, _⟩; exact False.elim (by cases ht)
    · intro t rest ih
      cases t with
      | funTok u v =>
        simp only [Multiset.foldr_cons, lamFunInsert, Finset.mem_insert, ih, Multiset.
   mem_cons]
        constructor
        · rintro (hp | ⟨q, hq, hq'⟩)
          · exact ⟨.funTok u v, Or.inl rfl, by cases hp; rfl⟩
          · exact ⟨q, Or.inr hq, hq'⟩
        · rintro ⟨q, hq, hq'⟩
          rcases hq with rfl | hq
          · injection hq' with hu hv
            exact Or.inl (Prod.ext hu.symm hv.symm)
          · exact Or.inr ⟨q, hq, hq'⟩
      | bot | atom _ =>
        simp only [Multiset.foldr_cons, lamFunInsert, id_eq, ih, Multiset.mem_cons]
        constructor
        · rintro ⟨q, hq, hq'⟩; exact ⟨q, Or.inr hq, hq'⟩
        · rintro ⟨q, hq, hq'⟩
          rcases hq with rfl | hq
          · exact False.elim (nomatch hq')
          · exact ⟨q, hq, hq'⟩
  constructor
  · intro hp
    rcases (aux u.1).1 hp with ⟨t, ht, ht'⟩
    subst ht'; exact Finset.mem_def.2 ht
  · intro hp
    exact (aux u.1).2 ⟨.funTok p.1 p.2, Finset.mem_def.1 hp, rfl⟩

end InfoSys

end DomainTheory.InformationSystems
```

lamAtomFinset.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamAtomFinset (u : Finset (RawLamToken α)) : Finset α :=
  Multiset.foldr lamAtomInsert ∅ u.1

end InfoSys

end DomainTheory.InformationSystems
```

mem_listToFinset.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    listToFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem mem_listToFinset {β : Type*} [DecidableEq β] {x : β} {xs : List β} :
```

```
    x ∈ listToFinset xs ↔ x ∈ xs := by
  induction xs with
  | nil =>
    constructor
    · intro h; exact False.elim (Finset.notMem_empty x h)
    · intro h; cases h
  | cons a as ih =>
    simp only [listToFinset, Finset.mem_insert, List.mem_cons, ih]

end InfoSys

end DomainTheory.InformationSystems
```

lamInUnionInsert.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    listToFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamInUnionInsert [DecidableEq (RawLamToken α)] :
    List (RawLamToken α) × List (RawLamToken α) → Finset (RawLamToken α) →
      Finset (RawLamToken α)
  | p, acc => listToFinset p.1 ∪' acc

end InfoSys

end DomainTheory.InformationSystems
```

LamEntDepthInst17.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
```

```
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInUnionInsert

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

instance [DecidableEq (RawLamToken α)] :
    LeftCommutative (lamInUnionInsert (α := α)) :=
  ⟨fun p q s => by
    simp only [lamInUnionInsert]
    ext x; simp only [mem_funion]
    constructor <;> · rintro (h | h | h); exacts [Or.inr (Or.inl h), Or.inl h, Or.inr (
    Or.inr h)]⟩

end InfoSys

end DomainTheory.InformationSystems
```

lamOutUnionInsert.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    listToFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamOutUnionInsert [DecidableEq (RawLamToken α)] :
    List (RawLamToken α) × List (RawLamToken α) → Finset (RawLamToken α) →
      Finset (RawLamToken α)
  | p, acc => listToFinset p.2 ∪' acc

end InfoSys

end DomainTheory.InformationSystems
```

LamEntDepthInst18.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutUnionInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

instance [DecidableEq (RawLamToken α)] :
    LeftCommutative (lamOutUnionInsert (α := α)) :=
  ⟨fun p q s => by
    simp only [lamOutUnionInsert]
    ext x; simp only [mem_funion]
    constructor <;> · rintro (h | h | h); exacts [Or.inr (Or.inl h), Or.inl h, Or.inr (
    Or.inr h)]⟩
```

```
end InfoSys

end DomainTheory.InformationSystems
```

lamInputUnion.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInUnionInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamInputUnion (s : Finset (List (RawLamToken α) × List (RawLamToken α))) :
    Finset (RawLamToken α) :=
  Multiset.foldr (lamInUnionInsert (α := α)) ∅ s.1

end InfoSys

end DomainTheory.InformationSystems
```

rawDepth.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def rawDepth : RawLamToken α → ℕ
  | .bot | .atom _ => 0
  | .funTok u v =>
      1 + Nat.max
        (List.foldl (fun d t => Nat.max d (rawDepth t)) 0 u)
        (List.foldl (fun d t => Nat.max d (rawDepth t)) 0 v)

end InfoSys

end DomainTheory.InformationSystems
```

foldl_max_ge_init.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.rawDepth

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive
```

```
namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

omit [DecidableEq α] in

theorem foldl_max_ge_init (u : List (RawLamToken α)) (init : ℕ) :
    init ≤ List.foldl (fun d t => Nat.max d (rawDepth t)) init u := by
  induction u generalizing init with
  | nil => exact le_rfl
  | cons a as ih =>
    exact Nat.le_trans (Nat.le_max_left init (rawDepth a)) (ih _)

end InfoSys

end DomainTheory.InformationSystems
```

maxDepthInsert.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.rawDepth

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def maxDepthInsert : RawLamToken α → ℕ → ℕ :=
  fun t d => Nat.max (rawDepth t) d

end InfoSys
```

```
end DomainTheory.InformationSystems
```

LamEntDepthInst31.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    maxDepthInsert

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

instance : LeftCommutative (maxDepthInsert (α := α)) :=
  ⟨fun a b d => by simp only [maxDepthInsert]; exact Nat.max_left_comm _ _ _⟩

end InfoSys

end DomainTheory.InformationSystems
```

max_le_max_nat.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem max_le_max_nat {a b c d : ℕ} (h1 : a ≤ c) (h2 : b ≤ d) :
    max a b ≤ max c d :=
  max_le (le_trans h1 (le_max_left _ _)) (le_trans h2 (le_max_right _ _))

end InfoSys

end DomainTheory.InformationSystems
```

foldl_max_mono_init.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    max_le_max_nat
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.rawDepth

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
```

```
variable (A : InfoSys α)

omit [DecidableEq α] in

theorem foldl_max_mono_init {u : List (RawLamToken α)} {i j : ℕ} (hij : i ≤ j) :
    List.foldl (fun d t => Nat.max d (rawDepth t)) i u ≤
      List.foldl (fun d t => Nat.max d (rawDepth t)) j u := by
  induction u generalizing i j with
  | nil => exact hij
  | cons a as ih => exact ih (max_le_max_nat hij le_rfl)

end InfoSys

end DomainTheory.InformationSystems
```

foldl_list_le_of_mem.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.rawDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    foldl_max_mono_init
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    foldl_max_ge_init

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

omit [DecidableEq α] in

theorem foldl_list_le_of_mem {t : RawLamToken α} {u : List (RawLamToken α)}
    (ht : t ∈ u) :
```

```
    rawDepth t ≤ List.foldl (fun d t => Nat.max d (rawDepth t)) 0 u := by
  induction u with
  | nil => cases ht
  | cons a as ih =>
    simp only [List.mem_cons] at ht
    rcases ht with rfl | ht
    · exact Nat.le_trans (Nat.le_max_right 0 (rawDepth t))
        (foldl_max_ge_init as (Nat.max 0 (rawDepth t)))
    · exact Nat.le_trans (ih ht) (foldl_max_mono_init (Nat.zero_le _))

end InfoSys

end DomainTheory.InformationSystems
```

rawDepth_funTok_gt_right.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.rawDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    foldl_list_le_of_mem

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

omit [DecidableEq α] in

theorem rawDepth_funTok_gt_right {u v : List (RawLamToken α)} {t : RawLamToken α}
    (ht : t ∈ v) : rawDepth t < rawDepth (.funTok u v) := by
  have h : rawDepth t ≤
      Nat.max (List.foldl (fun d t => Nat.max d (rawDepth t)) 0 u)
        (List.foldl (fun d t => Nat.max d (rawDepth t)) 0 v) :=
    Nat.le_trans (foldl_list_le_of_mem ht) (Nat.le_max_right _ _)
```

```
  simp only [rawDepth]
  exact Nat.lt_of_le_of_lt h (Nat.lt_add_of_pos_left (Nat.succ_pos 0))

end InfoSys

end DomainTheory.InformationSystems
```

rawDepth_funTok_gt_left.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.rawDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    foldl_list_le_of_mem

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

omit [DecidableEq α] in

theorem rawDepth_funTok_gt_left {u v : List (RawLamToken α)} {t : RawLamToken α}
    (ht : t ∈ u) : rawDepth t < rawDepth (.funTok u v) := by
  have h : rawDepth t ≤
      Nat.max (List.foldl (fun d t => Nat.max d (rawDepth t)) 0 u)
        (List.foldl (fun d t => Nat.max d (rawDepth t)) 0 v) :=
    Nat.le_trans (foldl_list_le_of_mem ht) (Nat.le_max_left _ _)
  simp only [rawDepth]
  exact Nat.lt_of_le_of_lt h (Nat.lt_add_of_pos_left (Nat.succ_pos 0))

end InfoSys

end DomainTheory.InformationSystems
```

foldr_max_lt_of_forall.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.rawDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    maxDepthInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst31

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

omit [DecidableEq α] in

theorem foldr_max_lt_of_forall {s : Multiset (RawLamToken α)} {b : ℕ}
    (hb : 0 < b) (h : ∀ t ∈ s, rawDepth t < b) :
    Multiset.foldr (maxDepthInsert (α := α)) 0 s < b := by
  revert h
  refine Multiset.induction_on s ?_ ?_
  · intro; exact hb
  · intro a s ih h
    simp only [Multiset.foldr_cons, maxDepthInsert]
    exact Nat.max_lt.2 ⟨h a (Multiset.mem_cons_self _ _),
      ih fun t ht => h t (Multiset.mem_cons_of_mem ht)⟩

end InfoSys

end DomainTheory.InformationSystems
```

lamOutputUnion.lean

```
module
```

```
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutUnionInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamOutputUnion (s : Finset (List (RawLamToken α) × List (RawLamToken α))) :
    Finset (RawLamToken α) :=
  Multiset.foldr (lamOutUnionInsert (α := α)) ∅ s.1

end InfoSys

end DomainTheory.InformationSystems
```

mem_lamOutputUnion.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    listToFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutUnionInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem mem_lamOutputUnion {s : Finset (List (RawLamToken α) × List (RawLamToken α))}
    {t : RawLamToken α} :
    t ∈ lamOutputUnion s ↔ ∃ p ∈ s, t ∈ listToFinset p.2 := by
  have aux (m : Multiset (List (RawLamToken α) × List (RawLamToken α))) :
      t ∈ Multiset.foldr (lamOutUnionInsert (α := α)) ∅ m ↔
        ∃ p ∈ m, t ∈ listToFinset p.2 := by
    refine Multiset.induction_on m ?_ ?_
    · constructor
      · intro ht; exact False.elim (Finset.notMem_empty t ht)
      · rintro ⟨_, hp, _⟩; exact False.elim (by cases hp)
    · intro p rest ih
      simp only [Multiset.foldr_cons, lamOutUnionInsert, mem_funion, ih, Multiset.
    mem_cons]
      constructor
      · rintro (ht | ⟨q, hq, ht⟩)
        · exact ⟨p, Or.inl rfl, ht⟩
        · exact ⟨q, Or.inr hq, ht⟩
      · rintro ⟨q, hq, ht⟩
        rcases hq with rfl | hq
        · exact Or.inl ht
        · exact Or.inr ⟨q, hq, ht⟩
  simpa [lamOutputUnion] using aux s.1

end InfoSys

end DomainTheory.InformationSystems
```

mem_lamInputUnion.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    listToFinset
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInUnionInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInputUnion

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem mem_lamInputUion {s : Finset (List (RawLamToken α) × List (RawLamToken α))}
    {t : RawLamToken α} :
    t ∈ lamInputUnion s ↔ ∃ p ∈ s, t ∈ listToFinset p.1 := by
  have aux (m : Multiset (List (RawLamToken α) × List (RawLamToken α))) :
      t ∈ Multiset.foldr (lamInUnionInsert (α := α)) ∅ m ↔
        ∃ p ∈ m, t ∈ listToFinset p.1 := by
    refine Multiset.induction_on m ?_ ?_
    · constructor
      · intro ht; exact False.elim (Finset.notMem_empty t ht)
      · rintro ⟨_, hp, _⟩; exact False.elim (by cases hp)
    · intro p rest ih
      simp only [Multiset.foldr_cons, lamInUnionInsert, mem_funion, ih, Multiset.
    mem_cons]
      constructor
      · rintro (ht | ⟨q, hq, ht⟩)
        · exact ⟨p, Or.inl rfl, ht⟩
        · exact ⟨q, Or.inr hq, ht⟩
      · rintro ⟨q, hq, ht⟩
        rcases hq with rfl | hq
        · exact Or.inl ht
        · exact Or.inr ⟨q, hq, ht⟩
  simpa [lamInputUnion] using aux s.1

end InfoSys

end DomainTheory.InformationSystems
```

foldr_max_le_of_forall.lean

```
module
```

```
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.rawDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    maxDepthInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst31

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

omit [DecidableEq α] in

theorem foldr_max_le_of_forall {s : Multiset (RawLamToken α)} {b : ℕ}
    (h : ∀ t ∈ s, rawDepth t ≤ b) :
    Multiset.foldr (maxDepthInsert (α := α)) 0 s ≤ b := by
  revert h
  refine Multiset.induction_on s ?_ ?_
  · intro; exact Nat.zero_le _
  · intro a s ih h
    simp only [Multiset.foldr_cons, maxDepthInsert]
    exact Nat.max_le.2 ⟨h a (Multiset.mem_cons_self _ _),
      ih fun t ht => h t (Multiset.mem_cons_of_mem ht)⟩

end InfoSys

end DomainTheory.InformationSystems
```

finsetMaxDepth.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
```

```
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    maxDepthInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst31
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    foldl_list_le_of_mem
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    foldr_max_le_of_forall
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    foldr_max_lt_of_forall
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInputUnion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    listToFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamFunFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamInputUnion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamOutputUnion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_listToFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.rawDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    rawDepth_funTok_gt_left
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    rawDepth_funTok_gt_right

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
variable (A : InfoSys α)

def finsetMaxDepth (u : Finset (RawLamToken α)) : ℕ :=
  Multiset.foldr (maxDepthInsert (α := α)) 0 u.1
```

```
theorem finsetMaxDepth.listToFinset_le (u : List (RawLamToken α)) :
    finsetMaxDepth (listToFinset u) ≤
      List.foldl (fun d t => Nat.max d (rawDepth t)) 0 u := by
  simp only [finsetMaxDepth]
  exact foldr_max_le_of_forall fun t ht =>
    foldl_list_le_of_mem ((mem_listToFinset).1 (Finset.mem_def.2 ht))

theorem finsetMaxDepth.list_lt_funTok (u v : List (RawLamToken α)) :
    finsetMaxDepth (listToFinset u) < rawDepth (.funTok u v) := by
  have h1 := finsetMaxDepth.listToFinset_le u
  have h2 : List.foldl (fun d t => Nat.max d (rawDepth t)) 0 u ≤
      Nat.max (List.foldl (fun d t => Nat.max d (rawDepth t)) 0 u)
        (List.foldl (fun d t => Nat.max d (rawDepth t)) 0 v) :=
    Nat.le_max_left _ _
  simp only [rawDepth]
  exact Nat.lt_of_le_of_lt (Nat.le_trans h1 h2) (Nat.lt_add_of_pos_left (Nat.succ_pos
    0))

omit [DecidableEq α] in

theorem le_finsetMaxDepth_of_mem {u : Finset (RawLamToken α)} {t : RawLamToken α}
    (ht : t ∈ u) : rawDepth t ≤ finsetMaxDepth u := by
  simp only [finsetMaxDepth]
  have ht' : t ∈ u.1 := Finset.mem_def.1 ht
  revert ht'
  refine Multiset.induction_on u.1 ?_ ?_
  · intro ht'; cases ht'
  · intro a s ih ht'
    simp only [Multiset.mem_cons] at ht'
    simp only [Multiset.foldr_cons, maxDepthInsert]
    rcases ht' with rfl | ht'
    · exact Nat.le_max_left _ _
    · exact Nat.le_trans (ih ht') (Nat.le_max_right _ _)

theorem finsetMaxDepth.inputUnion_lt {u : Finset (RawLamToken α)}
    {s : Finset (List (RawLamToken α) × List (RawLamToken α))}
    (hs : s ⊆ lamFunFinset u) (hfun : lamFunFinset u = ∅) :
    finsetMaxDepth (lamInputUnion s) < finsetMaxDepth u := by
  obtain ⟨p0, hp0⟩ := Finset.nonempty_of_ne_empty hfun
  have htok0 : .funTok p0.1 p0.2 ∈ u := mem_lamFunFinset.1 hp0
  have hpos : 0 < finsetMaxDepth u := by
    have hraw : 0 < rawDepth (.funTok p0.1 p0.2) := by
      simp only [rawDepth]
      exact Nat.add_pos_left (Nat.succ_pos 0) _
    exact Nat.lt_of_lt_of_le hraw (le_finsetMaxDepth_of_mem htok0)
  refine foldr_max_lt_of_forall (s := (lamInputUnion s).1) hpos ?_
  intro t ht
  have ht' : t ∈ lamInputUnion s := Finset.mem_def.2 ht
  rcases (mem_lamInputUnion).1 ht' with ⟨p, hp, htp⟩
  have htok : .funTok p.1 p.2 ∈ u := mem_lamFunFinset.1 (hs hp)
  exact Nat.lt_of_lt_of_le
    (rawDepth_funTok_gt_left ((mem_listToFinset).1 htp))
    (le_finsetMaxDepth_of_mem htok)

theorem finsetMaxDepth.outputUnion_lt {u : Finset (RawLamToken α)}
```

```
    {s : Finset (List (RawLamToken α) × List (RawLamToken α))}
    (hs : s ⊆ lamFunFinset u) (hfun : lamFunFinset u = ∅) :
    finsetMaxDepth (lamOutputUnion s) < finsetMaxDepth u := by
  obtain ⟨p0, hp0⟩ := Finset.nonempty_of_ne_empty hfun
  have htok0 : .funTok p0.1 p0.2 ∈ u := mem_lamFunFinset.1 hp0
  have hpos : 0 < finsetMaxDepth u := by
    have hraw : 0 < rawDepth (.funTok p0.1 p0.2) := by
      simp only [rawDepth]
      exact Nat.add_pos_left (Nat.succ_pos 0) _
    exact Nat.lt_of_lt_of_le hraw (le_finsetMaxDepth_of_mem htok0)
  refine foldr_max_lt_of_forall (s := (lamOutputUnion s).1) hpos ?_
  intro t ht
  have ht' : t ∈ lamOutputUnion s := Finset.mem_def.2 ht
  rcases (mem_lamOutputUnion).1 ht' with ⟨p, hp, htp⟩
  have htok : .funTok p.1 p.2 ∈ u := mem_lamFunFinset.1 (hs hp)
  exact Nat.lt_of_lt_of_le
    (rawDepth_funTok_gt_right ((mem_listToFinset).1 htp))
    (le_finsetMaxDepth_of_mem htok)

theorem finsetMaxDepth.list_lt_funTok_out (u v : List (RawLamToken α)) :
    finsetMaxDepth (listToFinset v) < rawDepth (.funTok u v) := by
  have h1 := finsetMaxDepth.listToFinset_le v
  have h2 : List.foldl (fun d t => Nat.max d (rawDepth t)) 0 v ≤
      Nat.max (List.foldl (fun d t => Nat.max d (rawDepth t)) 0 u)
        (List.foldl (fun d t => Nat.max d (rawDepth t)) 0 v) :=
    Nat.le_max_right _ _
  simp only [rawDepth]
  exact Nat.lt_of_le_of_lt (Nat.le_trans h1 h2) (Nat.lt_add_of_pos_left (Nat.succ_pos
    0))

theorem finsetMaxDepth.of_mem_funTok {u : Finset (RawLamToken α)}
    {xs ys : List (RawLamToken α)} (h : .funTok xs ys ∈ u) :
    finsetMaxDepth (listToFinset xs) < finsetMaxDepth u ∧
      finsetMaxDepth (listToFinset ys) < finsetMaxDepth u :=
  ⟨Nat.lt_of_lt_of_le (finsetMaxDepth.list_lt_funTok xs ys) (le_finsetMaxDepth_of_mem h
    ),
    Nat.lt_of_lt_of_le (finsetMaxDepth.list_lt_funTok_out xs ys) (
    le_finsetMaxDepth_of_mem h)⟩

end InfoSys

end DomainTheory.InformationSystems
```

LamConDepth.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    listToFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
```

```
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamFunFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInputUnion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst31
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    finsetMaxDepth

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def LamConDepth (u : Finset (RawLamToken α)) : Prop :=
  haveI : DecidableEq (Finset (List (RawLamToken α) × List (RawLamToken α))) :=
    decidableEq_finset
  if _hF : lamFunFinset u = ∅ then
    lamAtomFinset u ∈ A.Con
  else
    lamAtomFinset u = ∅ ∧
      (∀ p ∈ lamFunFinset u,
        LamConDepth (listToFinset p.1) ∧ LamConDepth (listToFinset p.2)) ∧
      (∀ s ⊆ lamFunFinset u,
        LamConDepth (lamInputUnion s) → LamConDepth (lamOutputUnion s))
termination_by finsetMaxDepth u
decreasing_by
  · exact (finsetMaxDepth.of_mem_funTok (mem_lamFunFinset.1 ?_?)).1
  · exact (finsetMaxDepth.of_mem_funTok (mem_lamFunFinset.1 ?_?)).2
  · exact finsetMaxDepth.inputUnion_lt ?_? ?_?
  · exact finsetMaxDepth.outputUnion_lt ?_? ?_?

end InfoSys

end DomainTheory.InformationSystems
```

LamEntDepth.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    listToFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInUnionInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutUnionInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInputUnion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.rawDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    maxDepthInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    finsetMaxDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst9
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst10
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_listToFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamFunFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst17
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst18
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamInputUnion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamOutputUnion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    max_le_max_nat
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    foldl_max_mono_init
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    foldl_max_ge_init
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    foldl_list_le_of_mem
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    rawDepth_funTok_gt_left
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    rawDepth_funTok_gt_right
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepthInst31
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    foldr_max_le_of_forall
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    foldr_max_lt_of_forall

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
variable (A : InfoSys α)

inductive LamEntDepth : Finset (RawLamToken α) → RawLamToken α → Prop where
  | bot {u : Finset (RawLamToken α)}
      (hu : LamConDepth A u) : LamEntDepth u .bot
  | atom {u : Finset (RawLamToken α)} {x : α}
      (hu : LamConDepth A u)
      (hF : lamFunFinset u = ∅)
      (hne : lamAtomFinset u = ∅)
      (hEnt : A.Ent (lamAtomFinset u) x) : LamEntDepth u (.atom x)
  | funTok {u : Finset (RawLamToken α)} {xs ys : List (RawLamToken α)}
      {s : Finset (List (RawLamToken α) × List (RawLamToken α))}
      (hu : LamConDepth A u)
      (hA : lamAtomFinset u = ∅)
      (hConIn : LamConDepth A (listToFinset xs))
      (hConOut : LamConDepth A (listToFinset ys))
      (hs : s ⊆ lamFunFinset u)

      (hWorld : lamFunFinset u = ∅)

      (hInCompat : lamFunFinset (listToFinset xs) = ∅ →
        lamFunFinset (lamInputUnion s) = ∅)
      (hEntIn : ∀ p ∈ s, ∀ z ∈ listToFinset p.1, LamEntDepth (listToFinset xs) z)
      (hEntOut : ∀ z ∈ listToFinset ys, LamEntDepth (lamOutputUnion s) z) :
      LamEntDepth u (.funTok xs ys)

theorem LamEntDepth_bot {u : Finset (RawLamToken α)} (hu : LamConDepth A u) :
    LamEntDepth A u .bot :=
  LamEntDepth.bot hu

theorem LamEntDepth.con {u : Finset (RawLamToken α)} {t : RawLamToken α}
    (ht : LamEntDepth A u t) : LamConDepth A u := by
  cases ht with
  | bot hu => exact hu
```

```
  | atom hu _ _ _ => exact hu
  | funTok hu _ _ _ _ _ _ _ _ => exact hu

end InfoSys

end DomainTheory.InformationSystems
```

lamFunFinset_insert_atom.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem lamFunFinset_insert_atom (u : Finset (RawLamToken α)) (x : α) :
    lamFunFinset (insert (.atom x) u) = lamFunFinset u := by
  ext p; simp only [mem_lamFunFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

lamAtomFinset_empty.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem lamAtomFinset_empty : lamAtomFinset (∅ : Finset (RawLamToken α)) = ∅ := rfl

end InfoSys

end DomainTheory.InformationSystems
```

lamOutputUnion_empty.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem lamOutputUnion_empty :
    lamOutputUnion (∅ : Finset (List (RawLamToken α) × List (RawLamToken α))) = ∅ :=
    by
  rfl

end InfoSys

end DomainTheory.InformationSystems
```

lamFunFinset_insert_funTok.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem lamFunFinset_insert_funTok (u : Finset (RawLamToken α))
    (xs ys : List (RawLamToken α)) :
    lamFunFinset (insert (.funTok xs ys) u) = insert (xs, ys) (lamFunFinset u) := by
  ext p; simp only [Finset.mem_insert, mem_lamFunFinset]
  constructor
  · rintro (h | h)
    · exact Or.inl (Prod.ext (RawLamToken.funTok.inj h).1 (RawLamToken.funTok.inj h).2)
    · exact Or.inr h
  · rintro (rfl | h)
    · exact Or.inl rfl
    · exact Or.inr h

end InfoSys

end DomainTheory.InformationSystems
```

lamInputUnion_empty.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem lamInputUnion_empty :
    lamInputUnion (∅ : Finset (List (RawLamToken α) × List (RawLamToken α))) = ∅ := by
  rfl

end InfoSys
```

```
end DomainTheory.InformationSystems
```

LamConN.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def LamConN : ℕ → Finset (RawLamToken α) → Prop
  | 0, u => lamAtomFinset u ∈ A.Con ∧ lamFunFinset u = ∅
  | n + 1, u =>
      LamConN n u ∨
        (lamAtomFinset u = ∅ ∧
          (∀ p ∈ lamFunFinset u,
            LamConN n (listToFinset p.1) ∧ LamConN n (listToFinset p.2)) ∧
            ∀ s ⊆ lamFunFinset u,
              LamConN n (lamInputUnion s) → LamConN n (lamOutputUnion s))

end InfoSys

end DomainTheory.InformationSystems
```

LamCon.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamConN

@[expose] public section
```

```
namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def LamCon (u : Finset (RawLamToken α)) : Prop :=
  ∃ n, LamConN A n u

end InfoSys

end DomainTheory.InformationSystems
```

mem_lamAtomFinset.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem mem_lamAtomFinset {u : Finset (RawLamToken α)} {x : α} :
    x ∈ lamAtomFinset u ↔ .atom x ∈ u := by
  have aux (s : Multiset (RawLamToken α)) :
      x ∈ Multiset.foldr lamAtomInsert (∅ : Finset α) s ↔ ∃ p ∈ s, p = .atom x := by
    refine Multiset.induction_on s ?_ ?_
    · constructor
      · intro hx; exact False.elim (Finset.notMem_empty x hx)
      · rintro ⟨_, hp, _⟩; exact False.elim (by cases hp)
    · intro p t ih
      cases p with
      | atom a =>
        simp only [Multiset.foldr_cons, lamAtomInsert, Finset.mem_insert, ih, Multiset
    .mem_cons]
        constructor
        · rintro (hx | ⟨q, hq, hq'⟩)
          · exact ⟨.atom a, Or.inl rfl, congrArg RawLamToken.atom hx.symm⟩
```

```
          · exact ⟨q, Or.inr hq, hq'⟩
        · rintro ⟨q, hq, hq'⟩
          rcases hq with rfl | hq
          · injection hq' with hx; exact Or.inl hx.symm
          · exact Or.inr ⟨q, hq, hq'⟩
      | bot | funTok _ _ =>
        simp only [Multiset.foldr_cons, lamAtomInsert, id_eq, ih, Multiset.mem_cons]
        constructor
        · rintro ⟨q, hq, hq'⟩; exact ⟨q, Or.inr hq, hq'⟩
        · rintro ⟨q, hq, hq'⟩
          rcases hq with rfl | hq
          · exact False.elim (nomatch hq')
          · exact ⟨q, hq, hq'⟩
  constructor
  · intro hx
    rcases (aux u.1).1 hx with ⟨p, hp, hp'⟩
    subst hp'; exact Finset.mem_def.2 hp
  · intro hx
    exact (aux u.1).2 ⟨.atom x, Finset.mem_def.1 hx, rfl⟩

end InfoSys

end DomainTheory.InformationSystems
```

lamAtomFinset_mono.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamAtomFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem lamAtomFinset_mono {u v : Finset (RawLamToken α)} (h : v ⊆ u) :
    lamAtomFinset v ⊆ lamAtomFinset u :=
  fun _ hx => mem_lamAtomFinset.2 (h (mem_lamAtomFinset.1 hx))

end InfoSys

end DomainTheory.InformationSystems
```

lamAtomFinset_insert_bot.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamAtomFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem lamAtomFinset_insert_bot (u : Finset (RawLamToken α)) :
    lamAtomFinset (insert (.bot : RawLamToken α) u) = lamAtomFinset u := by
  ext x; simp only [mem_lamAtomFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

lamAtomFinset_insert_funTok.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamAtomFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys
```

```
variable {α : Type*} [DecidableEq α]

theorem lamAtomFinset_insert_funTok (u : Finset (RawLamToken α))
    (xs ys : List (RawLamToken α)) :
    lamAtomFinset (insert (.funTok xs ys) u) = lamAtomFinset u := by
  ext x; simp only [mem_lamAtomFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

lamAtomFinset_insert_atom.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamAtomFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem lamAtomFinset_insert_atom (u : Finset (RawLamToken α)) (x : α) :
    lamAtomFinset (insert (.atom x) u) = insert x (lamAtomFinset u) := by
  ext y; simp only [Finset.mem_insert, mem_lamAtomFinset]
  constructor
  · rintro (h | h)
    · exact Or.inl (RawLamToken.atom.inj h)
    · exact Or.inr h
  · rintro (rfl | h)
    · exact Or.inl rfl
    · exact Or.inr h

end InfoSys

end DomainTheory.InformationSystems
```

lamFunFinset_mono.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem lamFunFinset_mono {u v : Finset (RawLamToken α)} (h : v ⊆ u) :
    lamFunFinset v ⊆ lamFunFinset u :=
  fun _ hp => mem_lamFunFinset.2 (h (mem_lamFunFinset.1 hp))

end InfoSys

end DomainTheory.InformationSystems
```

lamFunFinset_insert_bot.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem lamFunFinset_insert_bot (u : Finset (RawLamToken α)) :
    lamFunFinset (insert (.bot : RawLamToken α) u) = lamFunFinset u := by
  ext p; simp only [mem_lamFunFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
```

```
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

IsLamToken.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamCon

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

class IsLamToken (t : RawLamToken α) : Prop where
  out : match t with
    | .bot | .atom _ => True
    | .funTok u v => LamCon A (listToFinset u) ∧ LamCon A (listToFinset v)

end InfoSys

end DomainTheory.InformationSystems
```

LamToken.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.IsLamToken

@[expose] public section
```

```
namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def LamToken : Type _ := { t : RawLamToken α // IsLamToken A t }

end InfoSys

end DomainTheory.InformationSystems
```

BasicInst23.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

instance : DecidableEq (LamToken A) := Subtype.instDecidableEq

end InfoSys

end DomainTheory.InformationSystems
```

lamForget.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamForget (t : LamToken A) : RawLamToken α := t.val

end InfoSys

end DomainTheory.InformationSystems
```

lamForgetInsert.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.lamForget

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamForgetInsert :
```

```
    LamToken A → Finset (RawLamToken α) → Finset (RawLamToken α) :=
  fun t => insert (lamForget A t)

end InfoSys

end DomainTheory.InformationSystems
```

BasicInst27.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.lamForget
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamForgetInsert

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

instance : LeftCommutative (lamForgetInsert (A := A)) :=
  ⟨fun p q s => insert_comm' (lamForget A p) (lamForget A q) s⟩

end InfoSys

end DomainTheory.InformationSystems
```

LamConDepth_of_fun_empty.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConDepth_of_fun_empty {u : Finset (RawLamToken α)}
    (hF : lamFunFinset u = ∅) :
    LamConDepth A u ↔ lamAtomFinset u ∈ A.Con := by
  have : DecidableEq (Finset (List (RawLamToken α) × List (RawLamToken α))) :=
    decidableEq_finset
  rw [LamConDepth.eq_1, dite_eq_left hF]

end InfoSys

end DomainTheory.InformationSystems
```

lamInputUnion_funion.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)
```

```
theorem lamInputUnion_funion
    (s t : Finset (List (RawLamToken α) × List (RawLamToken α))) :
    lamInputUnion (s ∪' t) = lamInputUnion s ∪' lamInputUnion t := by
  ext x
  constructor
  · intro hx
    rcases (mem_lamInputUnion).1 hx with ⟨p, hp, hx'⟩
    rcases mem_funion.1 hp with hp | hp
    · exact mem_funion.2 (Or.inl ((mem_lamInputUnion).2 ⟨p, hp, hx'⟩))
    · exact mem_funion.2 (Or.inr ((mem_lamInputUnion).2 ⟨p, hp, hx'⟩))
  · intro hx
    rcases mem_funion.1 hx with hx | hx
    · rcases (mem_lamInputUnion).1 hx with ⟨p, hp, hx'⟩
      exact (mem_lamInputUnion).2 ⟨p, mem_funion.2 (Or.inl hp), hx'⟩
    · rcases (mem_lamInputUnion).1 hx with ⟨p, hp, hx'⟩
      exact (mem_lamInputUnion).2 ⟨p, mem_funion.2 (Or.inr hp), hx'⟩

end InfoSys

end DomainTheory.InformationSystems
```

lamForgetFinset.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamForgetInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamForgetFinset (u : Finset (LamToken A)) : Finset (RawLamToken α) :=
  Multiset.foldr (lamForgetInsert (A := A)) ∅ u.1
```

```
end InfoSys

end DomainTheory.InformationSystems
```

LamConDepth_of_fun_nonempty.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConDepth_of_fun_nonempty {u : Finset (RawLamToken α)}
    (hF : lamFunFinset u = ∅) :
    LamConDepth A u ↔
      lamAtomFinset u = ∅ ∧
        (∀ p ∈ lamFunFinset u,
          LamConDepth A (listToFinset p.1) ∧ LamConDepth A (listToFinset p.2)) ∧
        (∀ s ⊆ lamFunFinset u,
          LamConDepth A (lamInputUnion s) → LamConDepth A (lamOutputUnion s)) := by
  have : DecidableEq (Finset (List (RawLamToken α) × List (RawLamToken α))) :=
    decidableEq_finset
  rw [LamConDepth.eq_1, dite_eq_right hF]

end InfoSys

end DomainTheory.InformationSystems
```

LamConDepth_mono.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
```

```
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_mono
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_mono
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_nonempty

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConDepth_mono {u v : Finset (RawLamToken α)}
    (huv : u ⊆ v) (hv : LamConDepth A v) : LamConDepth A u := by
  have : DecidableEq (Finset (List (RawLamToken α) × List (RawLamToken α))) :=
    decidableEq_finset
  have hFunMono := lamFunFinset_mono huv
  have hAtomMono := lamAtomFinset_mono huv
  by_cases hFv : lamFunFinset v = ∅
  · have hFu : lamFunFinset u = ∅ :=
      Finset.Subset.antisymm
        (fun p hp => by
          have := hFunMono hp
          rw [hFv] at this; exact False.elim (Finset.notMem_empty p this))
        (Finset.empty_subset _)
    exact (LamConDepth_of_fun_empty A hFu).2
      (A.con_subset ((LamConDepth_of_fun_empty A hFv).1 hv) hAtomMono)
  · have hv' := (LamConDepth_of_fun_nonempty A hFv).1 hv
    rcases hv' with ⟨hAv, hWF, hFun⟩
    by_cases hFu : lamFunFinset u = ∅
    · have hAu : lamAtomFinset u = ∅ :=
        Finset.Subset.antisymm
          (fun x hx => by
            have := hAtomMono hx
            rw [hAv] at this; exact False.elim (Finset.notMem_empty x this))
          (Finset.empty_subset _)
      exact (LamConDepth_of_fun_empty A hFu).2 (by rw [hAu]; exact A.con_empty)
    · refine (LamConDepth_of_fun_nonempty A hFu).2 ⟨?_, ?_, ?_⟩
```

```
      · exact Finset.Subset.antisymm
          (fun x hx => by
            have := hAtomMono hx
            rw [hAv] at this; exact False.elim (Finset.notMem_empty x this))
          (Finset.empty_subset _)
      · intro p hp; exact hWF p (hFunMono hp)
      · intro s hs hIn
        exact hFun s (fun p hp => hFunMono (hs hp)) hIn

end InfoSys

end DomainTheory.InformationSystems
```

LamEntDepth_weaken_fun.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_mono
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_mono
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamEntDepth_weaken_fun {u v : Finset (RawLamToken α)} {t : RawLamToken α}
    (huv : u ⊆ v) (hv : LamConDepth A v) (hAv : lamAtomFinset v = ∅)
    (ht : LamEntDepth A u t) : LamEntDepth A v t := by
  cases ht with
  | bot _ => exact LamEntDepth.bot hv
  | atom _ _ hne _ =>
    obtain ⟨x, hx⟩ := Finset.nonempty_of_ne_empty hne
    exact False.elim (Finset.notMem_empty x (by
      have := lamAtomFinset_mono huv hx; rwa [hAv] at this))
  | funTok _ _ hConIn hConOut hs hWorld hInCompat hEntIn hEntOut =>
```

```
    exact LamEntDepth.funTok hv hAv hConIn hConOut
      (fun p hp => lamFunFinset_mono huv (hs hp))
      (fun hFv => hWorld (Finset.Subset.antisymm
          (fun p hp => by
            have := lamFunFinset_mono huv hp
            rw [hFv] at this; exact False.elim (Finset.notMem_empty p this))
          (Finset.empty_subset _)))
      hInCompat hEntIn hEntOut

end InfoSys

end DomainTheory.InformationSystems
```

funion_empty_right_lam.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem funion_empty_right_lam (u : Finset (RawLamToken α)) :
    u ∪' (∅ : Finset (RawLamToken α)) = u := by
  ext x; simp only [mem_funion, Finset.notMem_empty, or_false]

end InfoSys

end DomainTheory.InformationSystems
```

lamInputUnion_singleton.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
```

```
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamInputUnion_singleton (p : List (RawLamToken α) × List (RawLamToken α)) :
    lamInputUnion ({p} : Finset (List (RawLamToken α) × List (RawLamToken α))) =
      listToFinset p.1 := by
  ext t
  change t ∈ listToFinset p.1 ∪' ∅ ↔ t ∈ listToFinset p.1
  simp only [mem_funion, Finset.notMem_empty, or_false]

end InfoSys

end DomainTheory.InformationSystems
```

funion_assoc_lam.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive
```

```
namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem funion_assoc_lam (a b c : Finset (RawLamToken α)) :
    (a ∪' b) ∪' c = a ∪' (b ∪' c) := by
  ext x
  constructor
  · intro hx
    rcases mem_funion.mp hx with h | h
    · rcases mem_funion.mp h with h | h
      · exact mem_funion.mpr (Or.inl h)
      · exact mem_funion.mpr (Or.inr (mem_funion.mpr (Or.inl h)))
    · exact mem_funion.mpr (Or.inr (mem_funion.mpr (Or.inr h)))
  · intro hx
    rcases mem_funion.mp hx with h | h
    · exact mem_funion.mpr (Or.inl (mem_funion.mpr (Or.inl h)))
    · rcases mem_funion.mp h with h | h
      · exact mem_funion.mpr (Or.inl (mem_funion.mpr (Or.inr h)))
      · exact mem_funion.mpr (Or.inr h)

end InfoSys

end DomainTheory.InformationSystems
```

funion_comm_lam.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)
```

```
theorem funion_comm_lam (a b : Finset (RawLamToken α)) : a ∪' b = b ∪' a := by
  ext x
  constructor
  · intro hx
    rcases mem_funion.mp hx with h | h
    · exact mem_funion.mpr (Or.inr h)
    · exact mem_funion.mpr (Or.inl h)
  · intro hx
    rcases mem_funion.mp hx with h | h
    · exact mem_funion.mpr (Or.inr h)
    · exact mem_funion.mpr (Or.inl h)

end InfoSys

end DomainTheory.InformationSystems
```

finsetMaxDepth_insert_le.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem finsetMaxDepth_insert_le (u : Finset (RawLamToken α)) (a : RawLamToken α) :
    finsetMaxDepth (insert a u) ≤ Nat.max (rawDepth a) (finsetMaxDepth u) := by
  refine foldr_max_le_of_forall ?_
  intro x hx
  have hx' : x ∈ insert a u := Finset.mem_def.2 hx
  rcases Finset.mem_insert.mp hx' with rfl | hu
  · exact Nat.le_max_left _ _
  · exact Nat.le_trans (le_finsetMaxDepth_of_mem hu) (Nat.le_max_right _ _)

end InfoSys
```

```
end DomainTheory.InformationSystems
```

lamFunFinset_singleton_funTok.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamFunFinset_singleton_funTok (u v : List (RawLamToken α)) :
    lamFunFinset ({.funTok u v} : Finset (RawLamToken α)) = {(u, v)} := by
  ext p
  simp only [mem_lamFunFinset, Finset.mem_singleton]
  constructor
  · intro h
    exact Prod.ext (RawLamToken.funTok.inj h).1 (RawLamToken.funTok.inj h).2
  · intro h
    cases h
    rfl

end InfoSys

end DomainTheory.InformationSystems
```

LamEntN.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamConN
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def LamEntN : ℕ → Finset (RawLamToken α) → RawLamToken α → Prop
  | 0, u, .bot => LamConN A 0 u
  | 0, u, .atom x =>
      LamConN A 0 u ∧ lamAtomFinset u = ∅ ∧ A.Ent (lamAtomFinset u) x
  | 0, _, .funTok _ _ => False
  | n + 1, u, t =>
      LamEntN n u t ∨
        match t with
        | .bot => LamConN A (n + 1) u
        | .atom x =>
            LamConN A (n + 1) u ∧ lamFunFinset u = ∅ ∧
              lamAtomFinset u = ∅ ∧ A.Ent (lamAtomFinset u) x
        | .funTok u' v' =>
            LamConN A (n + 1) u ∧ lamAtomFinset u = ∅ ∧
              LamConN A n (listToFinset u') ∧ LamConN A n (listToFinset v') ∧
              ∃ s ⊆ lamFunFinset u,
                (∀ p ∈ s, ∀ t ∈ listToFinset p.1, LamEntN n (listToFinset u') t) ∧
                  (∀ t ∈ listToFinset v', LamEntN n (lamOutputUnion s) t)

end InfoSys

end DomainTheory.InformationSystems
```

LamEnt.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
```

```
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamEntN

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def LamEnt (u : Finset (RawLamToken α)) (t : RawLamToken α) : Prop :=
  ∃ n, LamEntN A n u t

end InfoSys

end DomainTheory.InformationSystems
```

LamTokenEnt.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamForgetFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamEnt

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)
```

```
def LamTokenEnt (u : Finset (LamToken A)) (p : LamToken A) : Prop :=
  LamEnt A (lamForgetFinset A u) p.val

end InfoSys

end DomainTheory.InformationSystems
```

LamConDepth_singleton_atom.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamAtomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_empty

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConDepth_singleton_atom (x : α) :
    LamConDepth A ({.atom x} : Finset (RawLamToken α)) := by
  have : DecidableEq (Finset (List (RawLamToken α) × List (RawLamToken α))) :=
    decidableEq_finset
  have hF : lamFunFinset ({.atom x} : Finset (RawLamToken α)) = ∅ := by
    ext p; constructor
    · intro hp; exact False.elim (nomatch mem_lamFunFinset.1 hp)
    · intro hp; exact False.elim (Finset.notMem_empty p hp)
  exact (LamConDepth_of_fun_empty A hF).2 (by
    have h : lamAtomFinset ({.atom x} : Finset (RawLamToken α)) = {x} := by
      ext y; simp only [mem_lamAtomFinset, Finset.mem_singleton]
      exact ⟨RawLamToken.atom.inj, congrArg RawLamToken.atom⟩
    rw [h]; exact A.con_sing x)

end InfoSys
```

```
end DomainTheory.InformationSystems
```

lamAtomFinset_singleton_funTok.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamAtomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamAtomFinset_singleton_funTok (u v : List (RawLamToken α)) :
    lamAtomFinset ({.funTok u v} : Finset (RawLamToken α)) = ∅ := by
  ext x
  constructor
  · intro hx; exact False.elim (nomatch mem_lamAtomFinset.1 hx)
  · intro hx; exact False.elim (Finset.notMem_empty x hx)

end InfoSys

end DomainTheory.InformationSystems
```

lamOutputUnion_insert.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamOutputUnion_insert
    (s : Finset (List (RawLamToken α) × List (RawLamToken α)))
    (p : List (RawLamToken α) × List (RawLamToken α)) :
    lamOutputUnion (insert p s) = listToFinset p.2 ∪' lamOutputUnion s := by
  ext t
  constructor
  · intro ht
    rcases (mem_lamOutputUnion).1 ht with ⟨q, hq, ht'⟩
    rcases Finset.mem_insert.mp hq with rfl | hq
    · exact mem_funion.2 (Or.inl ht')
    · exact mem_funion.2 (Or.inr ((mem_lamOutputUnion).2 ⟨q, hq, ht'⟩))
  · intro ht
    rcases mem_funion.1 ht with ht | ht
    · exact (mem_lamOutputUnion).2 ⟨p, Finset.mem_insert_self p s, ht⟩
    · rcases (mem_lamOutputUnion).1 ht with ⟨q, hq, ht'⟩
      exact (mem_lamOutputUnion).2 ⟨q, Finset.mem_insert_of_mem hq, ht'⟩

end InfoSys

end DomainTheory.InformationSystems
```

LamConDepth_singleton_bot.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamAtomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_empty

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConDepth_singleton_bot :
    LamConDepth A ({.bot} : Finset (RawLamToken α)) := by
  have : DecidableEq (Finset (List (RawLamToken α) × List (RawLamToken α))) :=
    decidableEq_finset
  have hF : lamFunFinset ({.bot} : Finset (RawLamToken α)) = ∅ := by
    ext p; constructor
    · intro hp; exact False.elim (nomatch mem_lamFunFinset.1 hp)
    · intro hp; exact False.elim (Finset.notMem_empty p hp)
  exact (LamConDepth_of_fun_empty A hF).2 (by
    have h : lamAtomFinset ({.bot} : Finset (RawLamToken α)) = ∅ := by
      ext x; constructor
      · intro hx; exact False.elim (nomatch mem_lamAtomFinset.1 hx)
      · intro hx; exact False.elim (Finset.notMem_empty x hx)
    rw [h]; exact A.con_empty)

end InfoSys

end DomainTheory.InformationSystems
```

lamInputUnion_insert.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive
```

```
namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamInputUnion_insert
    (s : Finset (List (RawLamToken α) × List (RawLamToken α)))
    (p : List (RawLamToken α) × List (RawLamToken α)) :
    lamInputUnion (insert p s) = listToFinset p.1 ∪' lamInputUnion s := by
  ext t
  constructor
  · intro ht
    rcases (mem_lamInputUnion).1 ht with ⟨q, hq, ht'⟩
    rcases Finset.mem_insert.mp hq with rfl | hq
    · exact mem_funion.2 (Or.inl ht')
    · exact mem_funion.2 (Or.inr ((mem_lamInputUnion).2 ⟨q, hq, ht'⟩))
  · intro ht
    rcases mem_funion.1 ht with ht | ht
    · exact (mem_lamInputUnion).2 ⟨p, Finset.mem_insert_self p s, ht⟩
    · rcases (mem_lamInputUnion).1 ht with ⟨q, hq, ht'⟩
      exact (mem_lamInputUnion).2 ⟨q, Finset.mem_insert_of_mem hq, ht'⟩

end InfoSys

end DomainTheory.InformationSystems
```

LamConDepth_insert_bot.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_insert_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_insert_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_nonempty

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConDepth_insert_bot {u : Finset (RawLamToken α)}
    (hu : LamConDepth A u) :
    LamConDepth A (insert (.bot : RawLamToken α) u) := by
  have : DecidableEq (Finset (List (RawLamToken α) × List (RawLamToken α))) :=
    decidableEq_finset
  by_cases hF : lamFunFinset u = ∅
  · have hF' : lamFunFinset (insert (.bot : RawLamToken α) u) = ∅ := by
      rw [lamFunFinset_insert_bot]; exact hF
    exact (LamConDepth_of_fun_empty A hF').2 (by
      rw [lamAtomFinset_insert_bot]
      exact (LamConDepth_of_fun_empty A hF).1 hu)
  · have hu' := (LamConDepth_of_fun_nonempty A hF).1 hu
    rcases hu' with ⟨hA, hWF, hFun⟩
    have hF' : lamFunFinset (insert (.bot : RawLamToken α) u) = ∅ := by
      rw [lamFunFinset_insert_bot]; exact hF
    refine (LamConDepth_of_fun_nonempty A hF').2 ⟨?_, ?_, ?_⟩
    · rw [lamAtomFinset_insert_bot]; exact hA
    · intro p hp
      rw [lamFunFinset_insert_bot] at hp
      exact hWF p hp
    · intro s hs hIn
      refine hFun s (by rw [← lamFunFinset_insert_bot u]; exact hs) hIn

end InfoSys

end DomainTheory.InformationSystems
```

LamTokenCon.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamForgetFinset
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def LamTokenCon (u : Finset (LamToken A)) : Prop :=
  LamCon A (lamForgetFinset A u)

end InfoSys

end DomainTheory.InformationSystems
```

LamConDepth_insert_atom.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_insert_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_insert_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_empty

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConDepth_insert_atom {u : Finset (RawLamToken α)} {x : α}
```

```
    (ht : LamEntDepth A u (.atom x)) :
    LamConDepth A (insert (.atom x) u) := by
  have : DecidableEq (Finset (List (RawLamToken α) × List (RawLamToken α))) :=
    decidableEq_finset
  cases ht with
  | atom hu hF _hne hEnt =>
    have hF' : lamFunFinset (insert (.atom x) u) = ∅ := by
      rw [lamFunFinset_insert_atom]; exact hF
    exact (LamConDepth_of_fun_empty A hF').2 (by
      rw [lamAtomFinset_insert_atom]
      exact A.ent_con hEnt)

end InfoSys

end DomainTheory.InformationSystems
```

finsetMaxDepth_funion_le.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem finsetMaxDepth_funion_le (u v : Finset (RawLamToken α)) :
    finsetMaxDepth (u ∪' v) ≤ Nat.max (finsetMaxDepth u) (finsetMaxDepth v) := by
  refine foldr_max_le_of_forall ?_
  intro t ht
  have ht' : t ∈ u ∪' v := Finset.mem_def.2 ht
  rcases mem_funion.1 ht' with hu | hv
  · exact Nat.le_trans (le_finsetMaxDepth_of_mem hu) (Nat.le_max_left _ _)
  · exact Nat.le_trans (le_finsetMaxDepth_of_mem hv) (Nat.le_max_right _ _)

end InfoSys
```

```
end DomainTheory.InformationSystems
```

lamFunFinset_funion.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamFunFinset_funion (u v : Finset (RawLamToken α)) :
    lamFunFinset (u ∪' v) = lamFunFinset u ∪' lamFunFinset v := by
  ext p
  constructor
  · intro hp
    have : .funTok p.1 p.2 ∈ u ∪' v := mem_lamFunFinset.1 hp
    rcases mem_funion.1 this with hu | hv
    · exact mem_funion.2 (Or.inl (mem_lamFunFinset.2 hu))
    · exact mem_funion.2 (Or.inr (mem_lamFunFinset.2 hv))
  · intro hp
    rcases mem_funion.1 hp with hu | hv
    · exact mem_lamFunFinset.2 (mem_funion.2 (Or.inl (mem_lamFunFinset.1 hu)))
    · exact mem_lamFunFinset.2 (mem_funion.2 (Or.inr (mem_lamFunFinset.1 hv)))

end InfoSys

end DomainTheory.InformationSystems
```

lamOutputUnion_funion.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamOutputUnion_funion
    (s t : Finset (List (RawLamToken α) × List (RawLamToken α))) :
    lamOutputUnion (s ∪' t) = lamOutputUnion s ∪' lamOutputUnion t := by
  ext x
  constructor
  · intro hx
    rcases (mem_lamOutputUnion).1 hx with ⟨p, hp, hx'⟩
    rcases mem_funion.1 hp with hp | hp
    · exact mem_funion.2 (Or.inl ((mem_lamOutputUnion).2 ⟨p, hp, hx'⟩))
    · exact mem_funion.2 (Or.inr ((mem_lamOutputUnion).2 ⟨p, hp, hx'⟩))
  · intro hx
    rcases mem_funion.1 hx with hx | hx
    · rcases (mem_lamOutputUnion).1 hx with ⟨p, hp, hx'⟩
      exact (mem_lamOutputUnion).2 ⟨p, mem_funion.2 (Or.inl hp), hx'⟩
    · rcases (mem_lamOutputUnion).1 hx with ⟨p, hp, hx'⟩
      exact (mem_lamOutputUnion).2 ⟨p, mem_funion.2 (Or.inr hp), hx'⟩

end InfoSys

end DomainTheory.InformationSystems
```

lamOutputUnion_singleton.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamOutputUnion_singleton (p : List (RawLamToken α) × List (RawLamToken α)) :
    lamOutputUnion ({p} : Finset (List (RawLamToken α) × List (RawLamToken α))) =
      listToFinset p.2 := by
  ext t
  change t ∈ listToFinset p.2 ∪' ∅ ↔ t ∈ listToFinset p.2
  simp only [mem_funion, Finset.notMem_empty, or_false]

end InfoSys

end DomainTheory.InformationSystems
```

LamEntDepth_of_mem.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamAtomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInputUnion_singleton
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion_singleton
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_nonempty

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamEntDepth_of_mem {u : Finset (RawLamToken α)} {t : RawLamToken α}
    (hu : LamConDepth A u) (ht : t ∈ u) : LamEntDepth A u t := by
  suffices ∀ M u t, Nat.max (finsetMaxDepth u) (rawDepth t) = M →
      LamConDepth A u → t ∈ u → LamEntDepth A u t from
    this _ _ _ rfl hu ht
  intro M
  induction M using Nat.strong_induction_on with
  | h M ih =>
    intro u t hM hu ht
    match t with
    | .bot => exact LamEntDepth_bot A hu
    | .atom x =>
      cases decidableEq_finset (lamFunFinset u) ∅ with
      | isTrue hF =>
        have hx : x ∈ lamAtomFinset u := mem_lamAtomFinset.2 ht
        exact LamEntDepth.atom hu hF (Finset.ne_empty_of_mem hx)
          (A.ent_refl ((LamConDepth_of_fun_empty A hF).1 hu) hx)
      | isFalse hF =>
        have hA := ((LamConDepth_of_fun_nonempty A hF).1 hu).1
        have hx : x ∈ lamAtomFinset u := mem_lamAtomFinset.2 ht
        rw [hA] at hx; exact False.elim (Finset.notMem_empty x hx)
    | .funTok xs ys =>
      cases decidableEq_finset (lamFunFinset u) ∅ with
      | isTrue hF =>
        have : (xs, ys) ∈ lamFunFinset u := mem_lamFunFinset.2 ht
        rw [hF] at this; exact False.elim (Finset.notMem_empty _ this)
      | isFalse hF =>
        have hu' := (LamConDepth_of_fun_nonempty A hF).1 hu
        rcases hu' with ⟨hA, hWF, _hFun⟩
        have hmem : (xs, ys) ∈ lamFunFinset u := mem_lamFunFinset.2 ht
        have ⟨hConIn, hConOut⟩ := hWF (xs, ys) hmem
        refine LamEntDepth.funTok (s := {(xs, ys)}) hu hA hConIn hConOut
          (fun p hp => by
            have hp' : p = (xs, ys) := Finset.mem_singleton.mp hp
            exact hp' ▸ hmem) hF ?_ ?_ ?_
        · intro hxsF
          have hIn : lamInputUnion {(xs, ys)} = listToFinset xs := by
            rw [lamInputUnion_singleton]
          rw [hIn, hxsF]
        · intro p hp z hz
          have hp' : p = (xs, ys) := Finset.mem_singleton.mp hp
          subst hp'
          refine ih (Nat.max (finsetMaxDepth (listToFinset xs)) (rawDepth z))
            ?_ (listToFinset xs) z rfl hConIn hz
          have htok : .funTok xs ys ∈ u := mem_lamFunFinset.1 hmem
          have ht_lt : rawDepth z < finsetMaxDepth u :=
            Nat.lt_of_lt_of_le (rawDepth_funTok_gt_left ((mem_listToFinset).1 hz))
```

```
            (le_finsetMaxDepth_of_mem htok)
          have hxs_lt : finsetMaxDepth (listToFinset xs) < rawDepth (.funTok xs ys) :=
            finsetMaxDepth.list_lt_funTok xs ys
          rw [← hM]
          refine Nat.max_lt.2 ⟨
            Nat.lt_of_lt_of_le hxs_lt (Nat.le_max_right _ _),
            Nat.lt_of_lt_of_le ht_lt (Nat.le_max_left _ _)⟩
        · intro z hz
          rw [lamOutputUnion_singleton]
          refine ih (Nat.max (finsetMaxDepth (listToFinset ys)) (rawDepth z))
            ?_ (listToFinset ys) z rfl hConOut hz
          have ht_lt : rawDepth z < rawDepth (.funTok xs ys) :=
            rawDepth_funTok_gt_right ((mem_listToFinset).1 hz)
          have hys_lt : finsetMaxDepth (listToFinset ys) < rawDepth (.funTok xs ys) :=
            finsetMaxDepth.list_lt_funTok_out xs ys
          rw [← hM]
          refine Nat.max_lt.2 ⟨
            Nat.lt_of_lt_of_le hys_lt (Nat.le_max_right _ _),
            Nat.lt_of_lt_of_le ht_lt (Nat.le_max_right _ _)⟩

end InfoSys

end DomainTheory.InformationSystems
```

insert_filter_ne_lam.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem insert_filter_ne_lam
    {p : List (RawLamToken α) × List (RawLamToken α)}
    {t : Finset (List (RawLamToken α) × List (RawLamToken α))}
```

```
    (hp : p ∈ t) : insert p (t.filter (· = p)) = t := by
  ext q
  constructor
  · intro hq
    rcases Finset.mem_insert.mp hq with rfl | hq
    · exact hp
    · exact (Finset.mem_filter.mp hq).1
  · intro hq
    if h : q = p then
      exact Finset.mem_insert.mpr (Or.inl h)
    else
      exact Finset.mem_insert.mpr (Or.inr (Finset.mem_filter.mpr ⟨hq, h⟩))

end InfoSys

end DomainTheory.InformationSystems
```

LamEntDepth_weaken_atom.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_mono
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_empty

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamEntDepth_weaken_atom {u v : Finset (RawLamToken α)} {x : α}
    (huv : u ⊆ v) (hv : LamConDepth A v) (hFv : lamFunFinset v = ∅)
    (ht : LamEntDepth A u (.atom x)) : LamEntDepth A v (.atom x) := by
  cases ht with
  | atom hu hF hne hEnt =>
    have hsubA := lamAtomFinset_mono huv
```

```
    have hne' : lamAtomFinset v = ∅ := by
      intro hAv
      obtain ⟨y, hy⟩ := Finset.nonempty_of_ne_empty hne
      exact Finset.notMem_empty y (by have := hsubA hy; rwa [hAv] at this)
    exact LamEntDepth.atom hv hFv hne'
      (A.ent_trans ((LamConDepth_of_fun_empty A hFv).1 hv)
        ((LamConDepth_of_fun_empty A hF).1 hu)
        (fun y hy => A.ent_refl ((LamConDepth_of_fun_empty A hFv).1 hv) (hsubA hy))
        hEnt)

end InfoSys

end DomainTheory.InformationSystems
```

LamEntDepth_weaken_insert.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_mono
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_insert_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_insert_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_insert_funTok
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_nonempty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth_weaken_fun
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth_weaken_atom

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)
```

```
theorem LamEntDepth_weaken_insert {u : Finset (RawLamToken α)}
    {a x : RawLamToken α}
    (hu' : LamConDepth A (insert a u))
    (hx : LamEntDepth A u x) (ha : LamEntDepth A u a) :
    LamEntDepth A (insert a u) x := by
  have : DecidableEq (Finset (List (RawLamToken α) × List (RawLamToken α))) :=
    decidableEq_finset
  have huv : u ⊆ insert a u := Finset.subset_insert a u
  match x with
  | .bot => exact LamEntDepth.bot hu'
  | .atom z =>
    cases decidableEq_finset (lamFunFinset (insert a u)) ∅ with
    | isTrue hF =>
      exact LamEntDepth_weaken_atom A huv hu' hF hx
    | isFalse hF =>
      have hAt := ((LamConDepth_of_fun_nonempty A hF).1 hu').1
      cases hx with
      | atom _ _ hne _ =>
        obtain ⟨y, hy⟩ := Finset.nonempty_of_ne_empty hne
        exact False.elim (Finset.notMem_empty y (by
          have := lamAtomFinset_mono huv hy; rwa [hAt] at this))
  | .funTok xs ys =>
    cases decidableEq_finset (lamFunFinset (insert a u)) ∅ with
    | isFalse hF =>
      have hAv := ((LamConDepth_of_fun_nonempty A hF).1 hu').1
      exact LamEntDepth_weaken_fun A huv hu' hAv hx
    | isTrue hF =>
      cases ha with
      | bot _ =>
        cases hx with
        | funTok hu hA hConIn hConOut hs hWorld hInCompat hEntIn hEntOut =>
          have hAv : lamAtomFinset (insert (.bot : RawLamToken α) u) = ∅ := by
            rw [lamAtomFinset_insert_bot]; exact hA
          exact LamEntDepth.funTok hu' hAv hConIn hConOut
            (by rw [lamFunFinset_insert_bot]; exact hs)
            (by rw [lamFunFinset_insert_bot]; exact hWorld)
            hInCompat hEntIn hEntOut
      | atom _ _ hne _ =>
        cases hx with
        | funTok _ hA _ _ _ _ _ _ _ =>
          obtain ⟨y, hy⟩ := Finset.nonempty_of_ne_empty hne
          exact False.elim (Finset.notMem_empty y (by rwa [hA] at hy))
      | funTok _ _ _ _ _ _ _ _ _ =>

        simp only [lamFunFinset_insert_funTok] at hF
        exact False.elim (Finset.notMem_empty _ (hF ▸ Finset.mem_insert_self _ _))

end InfoSys

end DomainTheory.InformationSystems
```

LamConDepth_funion_of_entSet.lean

```
module
```

```
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    funion_empty_right_lam
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth_weaken_insert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    finsetMaxDepth_insert_le

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConDepth_funion_of_entSet (M : ℕ)
    (ihIns : ∀ u t, Nat.max (finsetMaxDepth u) (rawDepth t) < M →
      LamEntDepth A u t → LamConDepth A (insert t u))
    {u v : Finset (RawLamToken α)}
    (hu : LamConDepth A u)
    (hEnt : ∀ t ∈ v, LamEntDepth A u t)
    (hbound : ∀ t ∈ v, Nat.max (finsetMaxDepth u) (rawDepth t) < M) :
    LamConDepth A (u ∪' v) := by
  have : DecidableEq (Finset (List (RawLamToken α) × List (RawLamToken α))) :=
    decidableEq_finset
  suffices ∀ (v u : Finset (RawLamToken α)),
      LamConDepth A u →
      (∀ t ∈ v, LamEntDepth A u t) →
      (∀ t ∈ v, Nat.max (finsetMaxDepth u) (rawDepth t) < M) →
      LamConDepth A (u ∪' v) from
    this v u hu hEnt hbound
  intro v
  induction v using Finset.induction_on with
  | empty =>
    intro u hu _ _
    simpa [funion_empty_right_lam] using hu
  | insert a t ha ih =>
    intro u hu hEnt hbound
    have mem_a : a ∈ insert a t := Finset.mem_insert_self a t
    have han : Nat.max (finsetMaxDepth u) (rawDepth a) < M := hbound a mem_a
```

```
    have hEnt_a : LamEntDepth A u a := hEnt a mem_a
    have hu_ins : LamConDepth A (insert a u) := ihIns u a han hEnt_a
    have hEnt_t : ∀ x ∈ t, LamEntDepth A (insert a u) x := by
      intro x hx
      exact LamEntDepth_weaken_insert A hu_ins
        (hEnt x (Finset.mem_insert_of_mem hx)) hEnt_a
    have hbound_t : ∀ x ∈ t, Nat.max (finsetMaxDepth (insert a u)) (rawDepth x) < M :=
     by
      intro x hx
      have hxu : Nat.max (finsetMaxDepth u) (rawDepth x) < M :=
        hbound x (Finset.mem_insert_of_mem hx)
      have hDi := finsetMaxDepth_insert_le u a
      have h1 : Nat.max (finsetMaxDepth (insert a u)) (rawDepth x) ≤
          Nat.max (Nat.max (rawDepth a) (finsetMaxDepth u)) (rawDepth x) :=
        max_le_max_nat hDi le_rfl
      refine Nat.lt_of_le_of_lt h1 ?_
      have h2 : Nat.max (Nat.max (rawDepth a) (finsetMaxDepth u)) (rawDepth x) =
          Nat.max (rawDepth a) (Nat.max (finsetMaxDepth u) (rawDepth x)) := by
        ac_rfl
      rw [h2]
      exact Nat.max_lt.2 ⟨Nat.lt_of_le_of_lt (Nat.le_max_right _ _) han, hxu⟩
    have hunion : LamConDepth A (insert a u ∪' t) :=
      ih (insert a u) hu_ins hEnt_t hbound_t
    have heq : insert a u ∪' t = u ∪' insert a t := by
      ext x
      constructor
      · intro hx
        rcases mem_funion.1 hx with h | h
        · rcases Finset.mem_insert.mp h with rfl | hu'
          · exact mem_funion.2 (Or.inr (Finset.mem_insert_self _ _))
          · exact mem_funion.2 (Or.inl hu')
        · exact mem_funion.2 (Or.inr (Finset.mem_insert_of_mem h))
      · intro hx
        rcases mem_funion.1 hx with hu' | h
        · exact mem_funion.2 (Or.inl (Finset.mem_insert_of_mem hu'))
        · rcases Finset.mem_insert.mp h with rfl | ht'
          · exact mem_funion.2 (Or.inl (Finset.mem_insert_self _ _))
          · exact mem_funion.2 (Or.inr ht')
    rwa [heq] at hunion

end InfoSys

end DomainTheory.InformationSystems
```

filter_ne_subset_of_subset_insert_lam.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem filter_ne_subset_of_subset_insert_lam
    {p : List (RawLamToken α) × List (RawLamToken α)}
    {t w : Finset (List (RawLamToken α) × List (RawLamToken α))}
    (ht : t ⊆ insert p w) : t.filter (· = p) ⊆ w := by
  intro q hq
  have ⟨hqt, hne⟩ := Finset.mem_filter.mp hq
  have : q ∈ insert p w := ht hqt
  rcases Finset.mem_insert.mp this with rfl | hqW
  · exact False.elim (hne rfl)
  · exact hqW

end InfoSys

end DomainTheory.InformationSystems
```

lamFunFinset_empty.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

theorem lamFunFinset_empty : lamFunFinset (∅ : Finset (RawLamToken α)) = ∅ := rfl
```

```
end InfoSys

end DomainTheory.InformationSystems
```

LamConDepth_empty.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConDepth_empty : LamConDepth A (∅ : Finset (RawLamToken α)) := by
  have : DecidableEq (Finset (List (RawLamToken α) × List (RawLamToken α))) :=
    decidableEq_finset
  rw [LamConDepth.eq_1, dite_eq_left lamFunFinset_empty, lamAtomFinset_empty]
  exact A.con_empty

end InfoSys

end DomainTheory.InformationSystems
```

LamWF.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

class LamWF (t : RawLamToken α) : Prop where
  out : match t with
    | .bot | .atom _ => True
    | .funTok xs ys => LamConDepth A (listToFinset xs) ∧ LamConDepth A (listToFinset
    ys)

end InfoSys

end DomainTheory.InformationSystems
```

LamDToken.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamWF

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys
```

```
variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def LamDToken : Type _ := { t : RawLamToken α // LamWF A t }

end InfoSys

end DomainTheory.InformationSystems
```

BasicInst70.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

instance : DecidableEq (LamDToken A) := Subtype.instDecidableEq

end InfoSys

end DomainTheory.InformationSystems
```

lamDForget.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamDForget (t : LamDToken A) : RawLamToken α := t.val

end InfoSys

end DomainTheory.InformationSystems
```

lamDForgetInsert.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.lamDForget

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys
```

```
variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamDForgetInsert :
    LamDToken A → Finset (RawLamToken α) → Finset (RawLamToken α) :=
  fun t => insert (lamDForget A t)

end InfoSys

end DomainTheory.InformationSystems
```

lamDBot.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamDBot : LamDToken A := ⟨.bot, ⟨trivial⟩⟩

end InfoSys

end DomainTheory.InformationSystems
```

BasicInst74.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
```

```
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.lamDForget
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamDForgetInsert

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

instance : LeftCommutative (lamDForgetInsert (A := A)) :=
  ⟨fun p q s => insert_comm' (lamDForget A p) (lamDForget A q) s⟩

end InfoSys

end DomainTheory.InformationSystems
```

LamConDepth_singleton_funTok.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_singleton_funTok
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
```

```
    lamFunFinset_singleton_funTok
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion_singleton
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_nonempty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst74

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConDepth_singleton_funTok (xs ys : List (RawLamToken α))
    (hxs : LamConDepth A (listToFinset xs)) (hys : LamConDepth A (listToFinset ys)) :
    LamConDepth A ({.funTok xs ys} : Finset (RawLamToken α)) := by
  have : DecidableEq (Finset (List (RawLamToken α) × List (RawLamToken α))) :=
    decidableEq_finset
  have hF : lamFunFinset ({.funTok xs ys} : Finset (RawLamToken α)) = {(xs, ys)} :=
    lamFunFinset_singleton_funTok xs ys
  have hA : lamAtomFinset ({.funTok xs ys} : Finset (RawLamToken α)) = ∅ :=
    lamAtomFinset_singleton_funTok xs ys
  have hne : lamFunFinset ({.funTok xs ys} : Finset (RawLamToken α)) = ∅ := by
    rw [hF]; exact Finset.singleton_ne_empty _
  refine (LamConDepth_of_fun_nonempty A hne).2 ⟨hA, ?_, ?_⟩
  · intro p hp
    have : p = (xs, ys) := Finset.mem_singleton.mp (hF ▸ hp)
    subst this; exact ⟨hxs, hys⟩
  · intro s hs hIn
    rw [hF] at hs
    by_cases hmem : (xs, ys) ∈ s
    · have hsin : s = {(xs, ys)} := by
        ext p
        constructor
        · intro hp
          exact Finset.mem_singleton.mpr (Finset.mem_singleton.mp (hs hp))
        · intro hp
          have : p = (xs, ys) := Finset.mem_singleton.mp hp
          subst this; exact hmem
      subst hsin
      rw [lamOutputUnion_singleton]
      exact hys
    · have hempty : s = ∅ := by
        ext p
        constructor
```

```
        · intro hp
          exact False.elim (hmem (by
            have : p = (xs, ys) := Finset.mem_singleton.mp (hs hp)
            subst this; exact hp))
        · intro hp; exact False.elim (Finset.notMem_empty p hp)
      subst hempty
      rw [lamOutputUnion_empty]
      exact LamConDepth_empty A

end InfoSys

end DomainTheory.InformationSystems
```

IsLamWF_of_mem.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_nonempty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamWF
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst74

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem IsLamWF_of_mem {u : Finset (RawLamToken α)} (hu : LamConDepth A u)
    {t : RawLamToken α} (ht : t ∈ u) : LamWF A t := by
  have : DecidableEq (Finset (List (RawLamToken α) × List (RawLamToken α))) :=
    decidableEq_finset
  match t with
  | .bot | .atom _ => exact ⟨trivial⟩
  | .funTok xs ys =>
```

```
    have hmem : (xs, ys) ∈ lamFunFinset u := mem_lamFunFinset.2 ht
    by_cases hF : lamFunFinset u = ∅
    · exact False.elim (Finset.notMem_empty _ (hF ▸ hmem))
    · exact ⟨((LamConDepth_of_fun_nonempty A hF).1 hu).2.1 _ hmem⟩

end InfoSys

end DomainTheory.InformationSystems
```

mem_foldr_lamDForget.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamDForgetInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst74

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem mem_foldr_lamDForget (s : Multiset (LamDToken A)) (t : RawLamToken α) :
    t ∈ Multiset.foldr (lamDForgetInsert (A := A)) ∅ s ↔ ∃ p ∈ s, p.val = t := by
  refine Multiset.induction_on s ?_ ?_
  · constructor
    · intro ht; exact False.elim (Finset.notMem_empty t ht)
    · rintro ⟨_, hp, _⟩; exact False.elim (by cases hp)
  · intro p rest ih
    simp only [Multiset.foldr_cons, lamDForgetInsert, Finset.mem_insert, ih, Multiset.
    mem_cons]
    constructor
    · rintro (rfl | ⟨q, hq, hq'⟩)
```

```
      · exact ⟨p, Or.inl rfl, rfl⟩
      · exact ⟨q, Or.inr hq, hq'⟩
    · rintro ⟨q, hq, hq'⟩
      rcases hq with rfl | hq
      · exact Or.inl hq'.symm
      · exact Or.inr ⟨q, hq, hq'⟩

end InfoSys

end DomainTheory.InformationSystems
```

lamDForgetFinset.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamDForgetInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst74
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_foldr_lamDForget

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
variable (A : InfoSys α)

def lamDForgetFinset (u : Finset (LamDToken A)) : Finset (RawLamToken α) :=
  Multiset.foldr (lamDForgetInsert (A := A)) ∅ u.1

theorem mem_lamDForgetFinset {u : Finset (LamDToken A)} {t : RawLamToken α} :
    t ∈ lamDForgetFinset A u ↔ ∃ p ∈ u, p.val = t := by
  simpa [lamDForgetFinset] using mem_foldr_lamDForget A u.1 t

theorem lamDForgetFinset.insert (u : Finset (LamDToken A)) (p : LamDToken A) :
```

```
    lamDForgetFinset A (Insert.insert p u) = Insert.insert p.val (lamDForgetFinset A u
    ) := by
  ext t
  constructor
  · intro ht
    rcases (mem_lamDForgetFinset A).1 ht with ⟨q, hq, rfl⟩
    rcases Finset.mem_insert.mp hq with rfl | hq
    · exact Finset.mem_insert_self _ _
    · exact Finset.mem_insert_of_mem ((mem_lamDForgetFinset A).2 ⟨q, hq, rfl⟩)
  · intro ht
    rcases Finset.mem_insert.mp ht with rfl | ht
    · exact (mem_lamDForgetFinset A).2 ⟨p, Finset.mem_insert_self p u, rfl⟩
    · rcases (mem_lamDForgetFinset A).1 ht with ⟨q, hq, rfl⟩
      exact (mem_lamDForgetFinset A).2 ⟨q, Finset.mem_insert_of_mem hq, rfl⟩

theorem lamDForgetFinset.mono {u v : Finset (LamDToken A)} (h : v ⊆ u) :
    lamDForgetFinset A v ⊆ lamDForgetFinset A u := by
  intro t ht
  rcases (mem_lamDForgetFinset A).1 ht with ⟨p, hp, rfl⟩
  exact (mem_lamDForgetFinset A).2 ⟨p, h hp, rfl⟩

theorem lamDForgetFinset.singleton (p : LamDToken A) :
    lamDForgetFinset A {p} = {p.val} := by
  ext t
  constructor
  · intro ht
    rcases (mem_lamDForgetFinset A).1 ht with ⟨q, hq, hq'⟩
    have : q = p := Finset.mem_singleton.mp hq
    subst this; exact Finset.mem_singleton.mpr hq'.symm
  · intro ht
    exact (mem_lamDForgetFinset A).2
      ⟨p, Finset.mem_singleton_self p, (Finset.mem_singleton.mp ht).symm⟩

end InfoSys

end DomainTheory.InformationSystems
```

listToLamDFinset.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamWF
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
```

```
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst74

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def listToLamDFinset :
    (xs : List (RawLamToken α)) →
      (∀ t ∈ xs, LamWF A t) → Finset (LamDToken A)
  | [], _ => ∅
  | t :: ts, h =>
      insert ⟨t, h t List.mem_cons_self⟩
        (listToLamDFinset ts fun w hw => h w (List.mem_cons_of_mem t hw))

end InfoSys

end DomainTheory.InformationSystems
```

mem_listToLamDFinset.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamWF
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst74
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    listToLamDFinset

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem mem_listToLamDFinset {xs : List (RawLamToken α)}
    {h : ∀ t ∈ xs, LamWF A t} {p : LamDToken A} :
    p ∈ listToLamDFinset A xs h ↔ p.val ∈ xs := by
  induction xs with
  | nil =>
    constructor
    · intro hp; exact False.elim (Finset.notMem_empty _ hp)
    · intro hp; cases hp
  | cons t ts ih =>
    constructor
    · intro hp
      rcases Finset.mem_insert.mp hp with hp | hp
      · subst hp; exact List.mem_cons_self
      · exact List.mem_cons_of_mem _ (ih.1 hp)
    · intro hp
      rcases List.mem_cons.mp hp with rfl | hp
      · exact Finset.mem_insert_self _ _
      · exact Finset.mem_insert_of_mem (ih.2 hp)

end InfoSys

end DomainTheory.InformationSystems
```

lamDForget_listToLamDFinset.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamWF
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst74
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamDForgetFinset
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    listToLamDFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_listToLamDFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamDForget_listToLamDFinset (xs : List (RawLamToken α))
    (h : ∀ t ∈ xs, LamWF A t) :
    lamDForgetFinset A (listToLamDFinset A xs h) = listToFinset xs := by
  ext t
  rw [mem_lamDForgetFinset, mem_listToFinset]
  constructor
  · rintro ⟨p, hp, rfl⟩
    exact (mem_listToLamDFinset A).1 hp
  · intro ht
    let p : LamDToken A := ⟨t, h t ht⟩
    exact ⟨p, (mem_listToLamDFinset A).2 ht, rfl⟩

end InfoSys

end DomainTheory.InformationSystems
```

LamDCon.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst74
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamDForgetFinset
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_singleton_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_singleton_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_singleton_funTok
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    IsLamWF_of_mem
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    listToLamDFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamDForget_listToLamDFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_mono

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def LamDCon (u : Finset (LamDToken A)) : Prop :=
  LamConDepth A (lamDForgetFinset A u)

theorem LamDCon.singleton (p : LamDToken A) : LamDCon A {p} := by
  rw [LamDCon, lamDForgetFinset.singleton]
  match p.val, p.property with
  | .bot, _ => exact LamConDepth_singleton_bot A
  | .atom x, _ => exact LamConDepth_singleton_atom A x
  | .funTok xs ys, ⟨⟨hxs, hys⟩⟩ => exact LamConDepth_singleton_funTok A xs ys hxs hys

theorem LamDCon.listToLamDFinset (xs : List (RawLamToken α))
    (hCon : LamConDepth A (listToFinset xs)) :
    LamDCon A (listToLamDFinset A xs fun _t ht =>
      IsLamWF_of_mem A hCon ((mem_listToFinset).2 ht)) := by
  rw [LamDCon, lamDForget_listToLamDFinset]
  exact hCon

theorem LamDCon.subset {u v : Finset (LamDToken A)}
    (hu : LamDCon A u) (hv : v ⊆ u) : LamDCon A v :=
  LamConDepth_mono A (lamDForgetFinset.mono A hv) hu

end InfoSys

end DomainTheory.InformationSystems
```

lamBot.lean

```
module
```

```
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamBot : LamToken A := ⟨.bot, ⟨trivial⟩⟩

end InfoSys

end DomainTheory.InformationSystems
```

LamConDepth_insert_of_ent.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_insert_funTok
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_insert_funTok
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInputUnion_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInputUnion_insert
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion_insert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInputUnion_funion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion_funion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_nonempty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_mono
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_insert_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_insert_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth_weaken_fun
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth_weaken_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    insert_filter_ne_lam
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    filter_ne_subset_of_subset_insert_lam
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_funion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_funion_of_entSet
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    funion_assoc_lam
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    funion_comm_lam
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    finsetMaxDepth_funion_le

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConDepth_insert_of_ent {u : Finset (RawLamToken α)} {t : RawLamToken α}
    (ht : LamEntDepth A u t) : LamConDepth A (insert t u) := by
  have : DecidableEq (Finset (List (RawLamToken α) × List (RawLamToken α))) :=
    decidableEq_finset
  suffices ∀ M u t, Nat.max (finsetMaxDepth u) (rawDepth t) = M →
      LamEntDepth A u t → LamConDepth A (insert t u) from
    this _ _ _ rfl ht
  intro M
  induction M using Nat.strong_induction_on with
  | h M ih =>
    intro u t hM ht
```

```
have ihIns : ∀ u' t', Nat.max (finsetMaxDepth u') (rawDepth t') < M →
    LamEntDepth A u' t' → LamConDepth A (insert t' u') :=
  fun u' t' hlt hEnt => ih _ hlt u' t' rfl hEnt
match t with
| .bot => exact LamConDepth_insert_bot A (LamEntDepth.con A ht)
| .atom x => exact LamConDepth_insert_atom A ht
| .funTok xs ys =>
  cases ht with
  | @funTok u xs ys s hu hA hConIn hConOut hs hWorld hInCompat hEntIn hEntOut =>
    have hF' : lamFunFinset (insert (.funTok xs ys) u) = ∅ := by
      rw [lamFunFinset_insert_funTok]
      exact Finset.insert_ne_empty _ _
    refine (LamConDepth_of_fun_nonempty A hF').2 ⟨?_, ?_, ?_⟩
    · rw [lamAtomFinset_insert_funTok]; exact hA
    · intro p hp
      rw [lamFunFinset_insert_funTok] at hp
      rcases Finset.mem_insert.mp hp with rfl | hp
      · exact ⟨hConIn, hConOut⟩
      · exact ((LamConDepth_of_fun_nonempty A hWorld).1 hu).2.1 p hp
    · intro sel hsel hIn
      if hp : (xs, ys) ∈ sel then
        let t' := sel.filter (· = (xs, ys))
        have ht_eq : insert (xs, ys) t' = sel := insert_filter_ne_lam hp
        have ht'sub : t' ⊆ lamFunFinset u :=
          filter_ne_subset_of_subset_insert_lam (by
            intro q hq; have := hsel hq; rwa [lamFunFinset_insert_funTok] at this)
        have hin' : LamConDepth A (listToFinset xs ∪' lamInputUnion t') := by
          rwa [← ht_eq, lamInputUnion_insert] at hIn
        have hsub : s ∪' t' ⊆ lamFunFinset u :=
          funion_subset_iff.mpr ⟨hs, ht'sub⟩
        have hEnt_in_s : ∀ z ∈ lamInputUnion s,
            LamEntDepth A (listToFinset xs) z := by
          intro z hz
          rcases (mem_lamInputUnion).1 hz with ⟨p, hp', hz'⟩
          exact hEntIn p hp' z hz'
        have hEnt_big : ∀ z ∈ lamInputUnion s,
            LamEntDepth A (listToFinset xs ∪' lamInputUnion t') z := by
          intro z hz
          have hzx := hEnt_in_s z hz
          have hsubxs : listToFinset xs ⊆ listToFinset xs ∪' lamInputUnion t' :=
            subset_funion_left _ _
          cases decidableEq_finset
              (lamFunFinset (listToFinset xs ∪' lamInputUnion t')) ∅ with
          | isFalse hFn =>
            have hAv := ((LamConDepth_of_fun_nonempty A hFn).1 hin').1
            exact LamEntDepth_weaken_fun A hsubxs hin' hAv hzx
          | isTrue hFhin =>
            match z with
            | .bot => exact LamEntDepth.bot hin'
            | .atom x =>
              exact LamEntDepth_weaken_atom A hsubxs hin' hFhin hzx
            | .funTok xs1 ys1 =>
              cases decidableEq_finset (lamFunFinset (listToFinset xs)) ∅ with
              | isTrue hxsF =>
                have hNoFun : lamFunFinset (lamInputUnion s) = ∅ := hInCompat hxsF
                have hzmem : .funTok xs1 ys1 ∈ lamInputUnion s := hz
```

```
                have : (xs1, ys1) ∈ lamFunFinset (lamInputUnion s) :=
                  mem_lamFunFinset.2 hzmem
                rw [hNoFun] at this
                exact False.elim (Finset.notMem_empty _ this)
              | isFalse hxsF =>
                have : lamFunFinset (listToFinset xs ∪' lamInputUnion t') = ∅ :=
by
                  intro h
                  have : lamFunFinset (listToFinset xs) = ∅ :=
                    Finset.Subset.antisymm
                      (fun p hp => by
                        have hp' : p ∈ lamFunFinset
                            (listToFinset xs ∪' lamInputUnion t') := by
                          rw [lamFunFinset_funion]
                          exact mem_funion.2 (Or.inl hp)
                        rw [h] at hp'; exact False.elim (Finset.notMem_empty p hp
'))
                      (Finset.empty_subset _)
                  exact hxsF this
                exact False.elim (this hFhin)
          have hDt : rawDepth (.funTok xs ys) ≤ M := by
            rw [← hM]; exact Nat.le_max_right _ _
          have hDu : finsetMaxDepth u ≤ M := by
            rw [← hM]; exact Nat.le_max_left _ _
          have hxs_lt : finsetMaxDepth (listToFinset xs) < M :=
            Nat.lt_of_lt_of_le (finsetMaxDepth.list_lt_funTok xs ys) hDt
          have hys_lt : finsetMaxDepth (listToFinset ys) < M :=
            Nat.lt_of_lt_of_le (finsetMaxDepth.list_lt_funTok_out xs ys) hDt
          have bound_in : ∀ z ∈ lamInputUnion s,
              Nat.max (finsetMaxDepth (listToFinset xs ∪' lamInputUnion t'))
                (rawDepth z) < M := by
            intro z hz
            have hDuBig : finsetMaxDepth (listToFinset xs ∪' lamInputUnion t') < M
:= by
              have hle := finsetMaxDepth_funion_le (listToFinset xs) (lamInputUnion
t')
              refine Nat.lt_of_le_of_lt hle (Nat.max_lt.2 ⟨hxs_lt, ?_⟩)
              by_cases ht'e : t' = ∅
              · rw [ht'e, lamInputUnion_empty]
                exact Nat.lt_of_le_of_lt (Nat.zero_le _) hxs_lt
              · obtain ⟨q, hq⟩ := Finset.nonempty_of_ne_empty ht'e
                exact Nat.lt_of_lt_of_le
                  (finsetMaxDepth.inputUnion_lt ht'sub hWorld) hDu
            have hz_lt : rawDepth z < M := by
              rcases (mem_lamInputUnion).1 hz with ⟨p, hp', hz'⟩
              have htok : .funTok p.1 p.2 ∈ u := mem_lamFunFinset.1 (hs hp')
              exact Nat.lt_of_lt_of_le
                (Nat.lt_of_lt_of_le
                  (rawDepth_funTok_gt_left ((mem_listToFinset).1 hz'))
                  (le_finsetMaxDepth_of_mem htok))
                hDu
            exact Nat.max_lt.2 ⟨hDuBig, hz_lt⟩
          have hbig : LamConDepth A
              ((listToFinset xs ∪' lamInputUnion t') ∪' lamInputUnion s) :=
            LamConDepth_funion_of_entSet A M ihIns hin' hEnt_big bound_in
          have hin_st' : LamConDepth A (lamInputUnion s ∪' lamInputUnion t') := by
```

```
          have heq :
              (listToFinset xs ∪' lamInputUnion t') ∪' lamInputUnion s =
                listToFinset xs ∪' (lamInputUnion s ∪' lamInputUnion t') := by
            rw [funion_assoc_lam, funion_comm_lam (lamInputUnion t')]
          have hbig' : LamConDepth A
              (listToFinset xs ∪' (lamInputUnion s ∪' lamInputUnion t')) := by
            rwa [heq] at hbig
          exact LamConDepth_mono A (subset_funion_right _ _) hbig'
        have hin_union : LamConDepth A (lamInputUnion (s ∪' t')) := by
          rwa [lamInputUnion_funion]
        have hout_union : LamConDepth A
            (lamOutputUnion s ∪' lamOutputUnion t') := by
          have hout : LamConDepth A (lamOutputUnion (s ∪' t')) :=
            ((LamConDepth_of_fun_nonempty A hWorld).1 hu).2.2 (s ∪' t') hsub
hin_union
          rwa [lamOutputUnion_funion] at hout
        have hEnt_out' : ∀ z ∈ listToFinset ys,
            LamEntDepth A (lamOutputUnion s ∪' lamOutputUnion t') z := by
          intro z hz
          have hzx := hEntOut z hz
          have hsubO : lamOutputUnion s ⊆
              lamOutputUnion s ∪' lamOutputUnion t' := subset_funion_left _ _
          cases decidableEq_finset
              (lamFunFinset (lamOutputUnion s ∪' lamOutputUnion t')) ∅ with
        | isFalse hFn =>
          have hAv := ((LamConDepth_of_fun_nonempty A hFn).1 hout_union).1
          exact LamEntDepth_weaken_fun A hsubO hout_union hAv hzx
        | isTrue hFo =>
          match z with
          | .bot => exact LamEntDepth.bot hout_union
          | .atom x =>
            exact LamEntDepth_weaken_atom A hsubO hout_union hFo hzx
          | .funTok xs1 ys1 =>

            cases hzx with
            | funTok _ _ _ _ hsO hWo _ _ _ =>
              have hOsF : lamFunFinset (lamOutputUnion s) = ∅ :=
                Finset.Subset.antisymm
                  (fun p hp => by
                    have : p ∈ lamFunFinset
                        (lamOutputUnion s ∪' lamOutputUnion t') := by
                      rw [lamFunFinset_funion]
                      exact mem_funion.2 (Or.inl hp)
                    rw [hFo] at this
                    exact False.elim (Finset.notMem_empty p this))
                  (Finset.empty_subset _)
              exact False.elim (hWo hOsF)
        have bound_out : ∀ z ∈ listToFinset ys,
            Nat.max (finsetMaxDepth (lamOutputUnion s ∪' lamOutputUnion t'))
              (rawDepth z) < M := by
          intro z hz
          have hDuOut : finsetMaxDepth
              (lamOutputUnion s ∪' lamOutputUnion t') < M := by
            have hle := finsetMaxDepth_funion_le (lamOutputUnion s) (
lamOutputUnion t')
            refine Nat.lt_of_le_of_lt hle (Nat.max_lt.2 ⟨?_, ?_⟩)
```

```
              · by_cases hs0 : s = ∅
                · rw [hs0, lamOutputUnion_empty]
                  exact Nat.lt_of_le_of_lt (Nat.zero_le _) hys_lt
                · exact Nat.lt_of_lt_of_le
                    (finsetMaxDepth.outputUnion_lt hs hWorld) hDu
              · by_cases ht'e : t' = ∅
                · rw [ht'e, lamOutputUnion_empty]
                  exact Nat.lt_of_le_of_lt (Nat.zero_le _) hys_lt
                · exact Nat.lt_of_lt_of_le
                    (finsetMaxDepth.outputUnion_lt ht'sub hWorld) hDu
            have hz_lt : rawDepth z < M :=
              Nat.lt_of_lt_of_le
                (rawDepth_funTok_gt_right ((mem_listToFinset).1 hz)) hDt
            exact Nat.max_lt.2 ⟨hDuOut, hz_lt⟩
          have hfinal : LamConDepth A
              ((lamOutputUnion s ∪' lamOutputUnion t') ∪' listToFinset ys) :=
            LamConDepth_funion_of_entSet A M ihIns hout_union hEnt_out' bound_out
          have hout_t : LamConDepth A
              (listToFinset ys ∪' lamOutputUnion t') := by
            have heq :
                (lamOutputUnion s ∪' lamOutputUnion t') ∪' listToFinset ys =
                  lamOutputUnion s ∪' (listToFinset ys ∪' lamOutputUnion t') := by
              rw [funion_assoc_lam, funion_comm_lam (lamOutputUnion t')]
            have hfinal' : LamConDepth A
                (lamOutputUnion s ∪' (listToFinset ys ∪' lamOutputUnion t')) := by
              rwa [heq] at hfinal
            exact LamConDepth_mono A (subset_funion_right _ _) hfinal'
          show LamConDepth A (lamOutputUnion sel)
          rwa [← ht_eq, lamOutputUnion_insert]
        else
          have hsel' : sel ⊆ lamFunFinset u := by
            intro p hp'
            have := hsel hp'
            rw [lamFunFinset_insert_funTok] at this
            rcases Finset.mem_insert.mp this with rfl | h
            · exact False.elim (hp hp')
            · exact h
          exact ((LamConDepth_of_fun_nonempty A hWorld).1 hu).2.2 sel hsel' hIn

end InfoSys

end DomainTheory.InformationSystems
```

LamEntDepth_trans.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
```

```
    mem_lamAtomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion_insert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion_funion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_nonempty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_mono
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth_weaken_fun
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth_weaken_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_funion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_funion_of_entSet
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_insert_of_ent

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamEntDepth_trans {u v : Finset (RawLamToken α)} {c : RawLamToken α}
    (hv : LamConDepth A v) (hu : LamConDepth A u)
    (hEnts : ∀ t ∈ u, LamEntDepth A v t) (ht : LamEntDepth A u c) :
    LamEntDepth A v c := by
  have : DecidableEq (Finset (List (RawLamToken α) × List (RawLamToken α))) :=
    decidableEq_finset
  suffices ∀ M u v c,
      Nat.max (finsetMaxDepth v) (Nat.max (finsetMaxDepth u) (rawDepth c)) = M →
      LamConDepth A v → LamConDepth A u →
      (∀ t ∈ u, LamEntDepth A v t) → LamEntDepth A u c → LamEntDepth A v c from
    this _ u v c rfl hv hu hEnts ht
  intro M
  induction M using Nat.strong_induction_on with
  | h M ih =>
```

```
intro u v c hM hv hu hEnts ht
have hleV : finsetMaxDepth v ≤ M := by rw [← hM]; exact Nat.le_max_left _ _
have hleU : finsetMaxDepth u ≤ M := by
  rw [← hM]; exact Nat.le_trans (Nat.le_max_left _ _) (Nat.le_max_right _ _)
have hleC : rawDepth c ≤ M := by
  rw [← hM]; exact Nat.le_trans (Nat.le_max_right _ _) (Nat.le_max_right _ _)

match c with
| .bot => exact LamEntDepth.bot hv

| .atom x =>
  cases ht with
  | @atom u x hu' hF hne hEnt =>
    obtain ⟨y0, hy0⟩ := Finset.nonempty_of_ne_empty hne
    have hEy0 := hEnts _ (mem_lamAtomFinset.1 hy0)
    have hFv : lamFunFinset v = ∅ := by
      cases hEy0 with
      | atom _ hFv' _ _ => exact hFv'
    have hneV : lamAtomFinset v = ∅ := by
      cases hEy0 with
      | atom _ _ hneV _ => exact hneV
    have hAtomEnt : ∀ y ∈ lamAtomFinset u, A.Ent (lamAtomFinset v) y := by
      intro y hy
      have hEy := hEnts _ (mem_lamAtomFinset.1 hy)
      cases hEy with
      | atom _ _ _ hE => exact hE
    exact LamEntDepth.atom hv hFv hneV
      (A.ent_trans ((LamConDepth_of_fun_empty A hFv).1 hv)
        ((LamConDepth_of_fun_empty A hF).1 hu') hAtomEnt hEnt)

| .funTok xs ys =>
  cases ht with
  | @funTok u xs ys s hu' hA hConIn hConOut hs hWorld hInCompat hEntIn hEntOut =>
    obtain ⟨p0, hp0⟩ := Finset.nonempty_of_ne_empty hWorld
    have hEp0 := hEnts _ (mem_lamFunFinset.1 hp0)
    have hAv : lamAtomFinset v = ∅ := by
      cases hEp0 with
      | funTok _ hAv' _ _ _ _ _ _ => exact hAv'
    have hFv : lamFunFinset v = ∅ := by
      cases hEp0 with
      | funTok _ _ _ _ _ hFv' _ _ _ => exact hFv'
    have hWit : ∀ p ∈ s, ∃ s_p ⊆ lamFunFinset v,
        LamConDepth A (listToFinset p.1) ∧ LamConDepth A (listToFinset p.2) ∧
        (∀ r ∈ s_p, ∀ z ∈ listToFinset r.1, LamEntDepth A (listToFinset p.1) z) ∧
        (∀ z ∈ listToFinset p.2, LamEntDepth A (lamOutputUnion s_p) z) := by
      intro p hp
      have hEp := hEnts _ (mem_lamFunFinset.1 (hs hp))
      cases hEp with
      | @funTok _ _ _ s_p _ _ hCi hCo hs_p _ _ hEi hEo =>
        exact ⟨s_p, hs_p, hCi, hCo, hEi, hEo⟩

    have hComb : ∀ (s' : Finset (List (RawLamToken α) × List (RawLamToken α))),
        s' ⊆ s →
        ∃ S ⊆ lamFunFinset v,
          (∀ r ∈ S, ∀ z ∈ listToFinset r.1, LamEntDepth A (listToFinset xs) z) ∧
          (∀ z ∈ lamOutputUnion s', LamEntDepth A (lamOutputUnion S) z) ∧
```

```
    LamConDepth A (lamOutputUnion S) := by
  intro s'
  induction s' using Finset.induction_on with
  | empty =>
    intro _
    refine ⟨(∅ : Finset (List (RawLamToken α) × List (RawLamToken α))),
      Finset.empty_subset _, ?_, ?_, ?_⟩
    · intro _ hr; exact False.elim (Finset.notMem_empty _ hr)
    · intro z hz
      rw [lamOutputUnion_empty] at hz
      exact False.elim (Finset.notMem_empty z hz)
    · rw [lamOutputUnion_empty]; exact LamConDepth_empty A
  | insert q sR hq ihS =>
    intro hs'
    have hsR : sR ⊆ s := fun p hp => hs' (Finset.mem_insert_of_mem hp)
    have hqS : q ∈ s := hs' (Finset.mem_insert_self q sR)
    obtain ⟨S', hS'sub, hS'in, hS'out, hConS'⟩ := ihS hsR
    obtain ⟨Sq, hSqsub, hConQIn, hConQOut, hSqin, hSqout⟩ := hWit q hqS
    have hSsub : S' ∪' Sq ⊆ lamFunFinset v :=
      funion_subset_iff.mpr ⟨hS'sub, hSqsub⟩
    have hEntAll : ∀ t ∈ lamInputUion (S' ∪' Sq),
        LamEntDepth A (listToFinset xs) t := by
      intro t ht
      rcases (mem_lamInputUnion).1 ht with ⟨r, hr, ht'⟩
      rcases mem_funion.1 hr with hr | hr
      · exact hS'in r hr t ht'
      · refine ih _ ?_ (listToFinset q.1) (listToFinset xs) t rfl
          hConIn hConQIn (fun w hw => hEntIn q hqS w hw) (hSqin r hr t ht')
        have htok : .funTok q.1 q.2 ∈ u := mem_lamFunFinset.1 (hs hqS)
        have htokR : .funTok r.1 r.2 ∈ v :=
          mem_lamFunFinset.1 (hSsub (mem_funion.2 (Or.inr hr)))
        have hzt := rawDepth_funTok_gt_left (v := r.2) ((mem_listToFinset).1
ht')
        have hDq := (finsetMaxDepth.of_mem_funTok htok).1
        have hDxs := finsetMaxDepth.list_lt_funTok xs ys
        exact Nat.max_lt.2 ⟨Nat.lt_of_lt_of_le hDxs hleC,
          Nat.max_lt.2 ⟨Nat.lt_of_lt_of_le hDq hleU,
            Nat.lt_of_lt_of_le
              (Nat.lt_of_lt_of_le hzt (le_finsetMaxDepth_of_mem htokR))
              hleV⟩⟩
    have hinU : LamConDepth A (lamInputUion (S' ∪' Sq)) :=
      LamConDepth_mono A (subset_funion_right _ _)
        (LamConDepth_funion_of_entSet A M
          (fun _ _ _ hE => LamConDepth_insert_of_ent A hE)
          hConIn hEntAll (fun t ht => by
            rcases (mem_lamInputUnion).1 ht with ⟨r, hr, ht'⟩
            have hDxs := finsetMaxDepth.list_lt_funTok xs ys
            have htok : .funTok r.1 r.2 ∈ v := mem_lamFunFinset.1 (hSsub hr)
            exact Nat.max_lt.2 ⟨Nat.lt_of_lt_of_le hDxs hleC,
              Nat.lt_of_lt_of_le
                (Nat.lt_of_lt_of_le
                  (rawDepth_funTok_gt_left (v := r.2) ((mem_listToFinset).1 ht
'))
                  (le_finsetMaxDepth_of_mem htok)) hleV⟩))
    have hConU : LamConDepth A (lamOutputUion (S' ∪' Sq)) :=
      ((LamConDepth_of_fun_nonempty A hFv).1 hv).2.2 (S' ∪' Sq) hSsub hinU
```

```
        have hConU' : LamConDepth A (lamOutputUnion S' ∪' lamOutputUnion Sq) := by
          rw [← lamOutputUnion_funion]; exact hConU
        refine ⟨S' ∪' Sq, hSsub, ?_, ?_, hConU⟩
        · intro r hr z hz
          rcases mem_funion.1 hr with hr | hr
          · exact hS'in r hr z hz
          · exact hEntAll _ ((mem_lamInputUnion).2 ⟨r, mem_funion.2 (Or.inr hr), hz⟩
)
        · intro z hz
          rw [lamOutputUnion_funion]
          have hz'' : z ∈ listToFinset q.2 ∪' lamOutputUnion sR := by
            rwa [lamOutputUnion_insert] at hz
          rcases mem_funion.1 hz'' with hzQ | hzR
          · have hzx := hSqout z hzQ
            have hsub := subset_funion_right (lamOutputUnion S') (lamOutputUnion
Sq)
            cases decidableEq_finset
                (lamFunFinset (lamOutputUnion S' ∪' lamOutputUnion Sq)) ∅ with
            | isFalse hFn =>
              exact LamEntDepth_weaken_fun A hsub hConU'
                ((LamConDepth_of_fun_nonempty A hFn).1 hConU').1 hzx
            | isTrue hFo =>
              match z with
              | .bot => exact LamEntDepth.bot hConU'
              | .atom _ =>
                exact LamEntDepth_weaken_atom A hsub hConU' hFo hzx
              | .funTok _ _ =>
                cases hzx with
                | funTok _ _ _ _ _ hWo _ _ _ =>
                  exact False.elim (hWo (Finset.Subset.antisymm
                    (fun p hp => by
                      have : p ∈ lamFunFinset
                          (lamOutputUnion S' ∪' lamOutputUnion Sq) := by
                        rw [lamFunFinset_funion]
                        exact mem_funion.2 (Or.inr hp)
                      exact False.elim (Finset.notMem_empty p (hFo ▶ this)))
                    (Finset.empty_subset _)))
          · have hzx := hS'out z hzR
            have hsub := subset_funion_left (lamOutputUnion S') (lamOutputUnion Sq
)
            cases decidableEq_finset
                (lamFunFinset (lamOutputUnion S' ∪' lamOutputUnion Sq)) ∅ with
            | isFalse hFn =>
              exact LamEntDepth_weaken_fun A hsub hConU'
                ((LamConDepth_of_fun_nonempty A hFn).1 hConU').1 hzx
            | isTrue hFo =>
              match z with
              | .bot => exact LamEntDepth.bot hConU'
              | .atom _ =>
                exact LamEntDepth_weaken_atom A hsub hConU' hFo hzx
              | .funTok _ _ =>
                cases hzx with
                | funTok _ _ _ _ _ hWo _ _ _ =>
                  exact False.elim (hWo (Finset.Subset.antisymm
                    (fun p hp => by
                      have : p ∈ lamFunFinset
```

```
                          (lamOutputUnion S' ∪' lamOutputUnion Sq) := by
                        rw [lamFunFinset_funion]
                        exact mem_funion.2 (Or.inl hp)
                      exact False.elim (Finset.notMem_empty p (hFo ▸ this)))
                    (Finset.empty_subset _)))
      obtain ⟨S, hSsub, hSin, hSoutS, hConS⟩ :=
        hComb s (Finset.Subset.refl _)
      have hConOutS : LamConDepth A (lamOutputUnion s) :=
        ((LamConDepth_of_fun_nonempty A hWorld).1 hu').2.2 s hs
          (LamConDepth_mono A (subset_funion_right _ _)
            (LamConDepth_funion_of_entSet A M
              (fun _ _ _ hE => LamConDepth_insert_of_ent A hE)
              hConIn
              (fun t ht => by
                rcases (mem_lamInputUnion).1 ht with ⟨p, hp, ht'⟩
                exact hEntIn p hp t ht')
              (fun t ht => by
                rcases (mem_lamInputUnion).1 ht with ⟨p, hp, ht'⟩
                have hDxs := finsetMaxDepth.list_lt_funTok xs ys
                have htok : .funTok p.1 p.2 ∈ u := mem_lamFunFinset.1 (hs hp)
                exact Nat.max_lt.2 ⟨Nat.lt_of_lt_of_le hDxs hleC,
                  Nat.lt_of_lt_of_le
                    (Nat.lt_of_lt_of_le
                      (rawDepth_funTok_gt_left ((mem_listToFinset).1 ht'))
                      (le_finsetMaxDepth_of_mem htok)) hleU⟩⟩))
      have hSout : ∀ z ∈ listToFinset ys, LamEntDepth A (lamOutputUnion S) z := by
        intro z hz
        refine ih _ ?_ (lamOutputUnion s) (lamOutputUnion S) z rfl
          hConS hConOutS (fun t ht => hSoutS t ht) (hEntOut z hz)
        exact Nat.max_lt.2 ⟨
          Nat.lt_of_lt_of_le (finsetMaxDepth.outputUnion_lt hSsub hFv) hleV,
          Nat.max_lt.2 ⟨
            Nat.lt_of_lt_of_le (finsetMaxDepth.outputUnion_lt hs hWorld) hleU,
            Nat.lt_of_lt_of_le
              (rawDepth_funTok_gt_right ((mem_listToFinset).1 hz)) hleC⟩⟩
      have hInCompat' : lamFunFinset (listToFinset xs) = ∅ →
          lamFunFinset (lamInputUnion S) = ∅ := by
        intro hxsF
        ext p
        constructor
        · intro hp
          have hmem : .funTok p.1 p.2 ∈ lamInputUnion S := mem_lamFunFinset.1 hp
          rcases (mem_lamInputUnion).1 hmem with ⟨r, hr, hr'⟩
          cases hSin r hr _ hr' with
          | funTok _ _ _ _ _ hWx _ _ _ => exact False.elim (hWx hxsF)
        · intro hp; exact False.elim (Finset.notMem_empty _ hp)
      exact LamEntDepth.funTok hv hAv hConIn hConOut hSsub hFv hInCompat' hSin hSout

end InfoSys

end DomainTheory.InformationSystems
```

LamDEnt.lean

```
module
```

```
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst74
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamDForgetFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.lamDBot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth_of_mem
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth_trans

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def LamDEnt (u : Finset (LamDToken A)) (p : LamDToken A) : Prop :=
  LamEntDepth A (lamDForgetFinset A u) p.val

theorem LamDEnt.bot {u : Finset (LamDToken A)} (hu : LamDCon A u) :
    LamDEnt A u (lamDBot A) :=
  LamEntDepth.bot hu

theorem LamDEnt.of_mem {u : Finset (LamDToken A)} {p : LamDToken A}
    (hu : LamDCon A u) (hp : p ∈ u) : LamDEnt A u p :=
  LamEntDepth_of_mem A hu ((mem_lamDForgetFinset A).2 ⟨p, hp, rfl⟩)

theorem LamDEnt.trans {u v : Finset (LamDToken A)} {c : LamDToken A}
    (hv : LamDCon A v) (hu : LamDCon A u)
    (hEnts : ∀ t ∈ u, LamDEnt A v t) (ht : LamDEnt A u c) :
    LamDEnt A v c :=
  LamEntDepth_trans A hv hu
    (fun t ht' => by
      rcases (mem_lamDForgetFinset A).1 ht' with ⟨p, hp, rfl⟩
```

```
      exact hEnts p hp)
    ht

end InfoSys

end DomainTheory.InformationSystems
```

LamDCon_insert_of_ent.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_insert_of_ent
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst74
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamDForgetFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDEnt

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamDCon_insert_of_ent {u : Finset (LamDToken A)} {p : LamDToken A}
    (ht : LamDEnt A u p) : LamDCon A (insert p u) := by
  rw [LamDCon, lamDForgetFinset.insert]
  exact LamConDepth_insert_of_ent A ht

end InfoSys

end DomainTheory.InformationSystems
```

lambdaSystem.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.lamDBot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst74
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamDCon_insert_of_ent

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lambdaSystem : InfoSys (LamDToken A) where
  bot := lamDBot A
  Con := {u | LamDCon A u}
  Ent := LamDEnt A
  con_subset := fun hu hv => LamDCon.subset A hu hv
  con_sing := LamDCon.singleton A
  ent_con := fun h => LamDCon_insert_of_ent A h
  ent_bot := fun hu => LamDEnt.bot A hu
  ent_refl := fun hu hp => LamDEnt.of_mem A hu hp
  ent_trans := fun hv hu hEnts hEntc => LamDEnt.trans A hv hu hEnts hEntc

end InfoSys

end DomainTheory.InformationSystems
```

lamRhs.lean

```
module
```

```
public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst74
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lambdaSystem

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamRhs : InfoSys (SumToken α (FunToken (lambdaSystem A) (lambdaSystem A))) :=
  sumSystem A (functionSystem (lambdaSystem A) (lambdaSystem A))

end InfoSys

end DomainTheory.InformationSystems
```

lamUnfold.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
```

```
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst74
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    IsLamWF_of_mem
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lambdaSystem
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    listToLamDFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDCon

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

def lamUnfold (t : LamDToken A) :
    SumToken α (FunToken (lambdaSystem A) (lambdaSystem A)) :=
  match t with
  | ⟨.bot, _⟩ => .bot
  | ⟨.atom x, _⟩ => .left x
  | ⟨.funTok xs ys, ⟨⟨hxs, hys⟩⟩⟩ =>
      let u := listToLamDFinset A xs fun _w hw =>
        IsLamWF_of_mem A hxs ((mem_listToFinset).2 hw)
      let v := listToLamDFinset A ys fun _w hw =>
        IsLamWF_of_mem A hys ((mem_listToFinset).2 hw)
      .right ⟨(u, v), ⟨LamDCon.listToLamDFinset A xs hxs,
        LamDCon.listToLamDFinset A ys hys⟩⟩

end InfoSys

end DomainTheory.InformationSystems
```

Basic.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card

public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    RawLamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamConN
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.IsLamToken
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.lamBot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.lamForget
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamForgetInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamForgetFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamTokenCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamEntN
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamTokenEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamWF
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.lamDBot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.lamDForget
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamDForgetInsert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamDForgetFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamDEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lambdaSystem
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    listToLamDFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.lamUnfold
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.lamRhs
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamAtomFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_mono
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_mono
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_insert_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_insert_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_insert_funTok
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_insert_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_insert_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_insert_funTok
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInputUnion_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
```

```
    BasicInst23
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst27
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamAtomFinset_singleton_funTok
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_singleton_funTok
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInputUnion_singleton
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion_singleton
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInputUnion_insert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion_insert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamInputUnion_funion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamOutputUnion_funion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_of_fun_nonempty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_mono
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_singleton_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_singleton_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth_of_mem
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_insert_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_insert_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth_weaken_fun
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth_weaken_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    funion_empty_right_lam
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    insert_filter_ne_lam
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    filter_ne_subset_of_subset_insert_lam
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamFunFinset_funion
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth_weaken_insert
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    finsetMaxDepth_insert_le
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_funion_of_entSet
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
```

```
    funion_assoc_lam
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    funion_comm_lam
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    finsetMaxDepth_funion_le
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_insert_of_ent
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntDepth_trans
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst70
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    BasicInst74
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_foldr_lamDForget
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConDepth_singleton_funTok
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    IsLamWF_of_mem
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamDCon_insert_of_ent
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_listToLamDFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamDForget_listToLamDFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem mem_foldr_lamForget (s : Multiset (LamToken A)) (t : RawLamToken α) :
    t ∈ Multiset.foldr (lamForgetInsert (A := A)) ∅ s ↔ ∃ p ∈ s, p.val = t := by
  refine Multiset.induction_on s ?_ ?_
  · constructor
    · intro ht; exact False.elim (Finset.notMem_empty t ht)
    · rintro ⟨_, hp, _⟩; exact False.elim (by cases hp)
  · intro p rest ih
    simp only [Multiset.foldr_cons, lamForgetInsert, Finset.mem_insert, ih, Multiset.
    mem_cons]
    constructor
    · rintro (rfl | ⟨q, hq, hq'⟩)
      · exact ⟨p, Or.inl rfl, rfl⟩
      · exact ⟨q, Or.inr hq, hq'⟩
    · rintro ⟨q, hq, hq'⟩
      rcases hq with rfl | hq
      · exact Or.inl hq'.symm
      · exact Or.inr ⟨q, hq, hq'⟩
```

```
theorem funion_insert_lam (u : Finset (RawLamToken α)) (a : RawLamToken α)
    (t : Finset (RawLamToken α)) : u ∪' insert a t = insert a (u ∪' t) := by
  ext x
  constructor
  · intro hx
    rcases mem_funion.mp hx with hu | hins
    · exact Finset.mem_insert_of_mem (mem_funion.mpr (Or.inl hu))
    · rcases Finset.mem_insert.mp hins with ha | ht
      · exact Finset.mem_insert.mpr (Or.inl ha)
      · exact Finset.mem_insert_of_mem (mem_funion.mpr (Or.inr ht))
  · intro hx
    rcases Finset.mem_insert.mp hx with ha | h
    · exact mem_funion.mpr (Or.inr (Finset.mem_insert.mpr (Or.inl ha)))
    · rcases mem_funion.mp h with hu | ht
      · exact mem_funion.mpr (Or.inl hu)
      · exact mem_funion.mpr (Or.inr (Finset.mem_insert.mpr (Or.inr ht)))

end InfoSys
end DomainTheory.InformationSystems
```

LamConN_atom_empty.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConN_atom_empty {n : ℕ} {u : Finset (RawLamToken α)}
    (hu : LamConN A n u) (hne : lamFunFinset u = ∅) : lamAtomFinset u = ∅ := by
  induction n generalizing u with
  | zero => exact False.elim (hne hu.2)
  | succ n ih =>
    rcases hu with hu | ⟨hA, _, _⟩
    · exact ih hu hne
    · exact hA

end InfoSys
end DomainTheory.InformationSystems
```

LamConN_atom_con.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConN_atom_con {n : ℕ} {u : Finset (RawLamToken α)}
    (hu : LamConN A n u) (hne : lamAtomFinset u = ∅) : lamAtomFinset u ∈ A.Con := by
  induction n generalizing u with
  | zero => exact hu.1
  | succ n ih =>
    rcases hu with hu | ⟨hA, _, _⟩
    · exact ih hu hne
    · exact False.elim (hne hA)

end InfoSys
end DomainTheory.InformationSystems
```

LamCon_singleton_atom.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamCon_singleton_atom (x : α) :
    LamCon A ({.atom x} : Finset (RawLamToken α)) := by
  refine ⟨0, ?_⟩
```

```
  change lamAtomFinset _ ∈ A.Con ∧ lamFunFinset _ = ∅
  constructor
  · have h : lamAtomFinset ({.atom x} : Finset (RawLamToken α)) = {x} := by
      ext y
      simp only [mem_lamAtomFinset, Finset.mem_singleton]
      exact ⟨RawLamToken.atom.inj, congrArg RawLamToken.atom⟩
    rw [h]; exact A.con_sing x
  · ext p
    constructor
    · intro hp; exact False.elim (nomatch mem_lamFunFinset.1 hp)
    · intro hp; exact False.elim (Finset.notMem_empty p hp)

end InfoSys
end DomainTheory.InformationSystems
```

lamDForgetFinset_empty.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamDForgetFinset_empty : lamDForgetFinset A (∅ : Finset (LamDToken A)) = ∅ :=
  rfl

end InfoSys
end DomainTheory.InformationSystems
```

LamEnt_bot.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamEnt_bot {u : Finset (RawLamToken α)} (hu : LamCon A u) :
    LamEnt A u .bot := by
  rcases hu with ⟨n, hu⟩
  cases n with
  | zero => exact ⟨0, hu⟩
  | succ n => exact ⟨n + 1, Or.inr hu⟩

end InfoSys
end DomainTheory.InformationSystems
```

LamTokenEnt_bot.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.LamEnt_bot

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamTokenEnt_bot {u : Finset (LamToken A)} (hu : LamTokenCon A u) :
    LamTokenEnt A u (lamBot A) :=
  LamEnt_bot A hu

end InfoSys
end DomainTheory.InformationSystems
```

LamConN_fun_empty.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConN_fun_empty {n : ℕ} {u : Finset (RawLamToken α)}
    (hu : LamConN A n u) (hne : lamAtomFinset u = ∅) : lamFunFinset u = ∅ := by
  induction n generalizing u with
  | zero => exact hu.2
  | succ n ih =>
    rcases hu with hu | ⟨hA, _, _⟩
    · exact ih hu hne
    · exact False.elim (hne hA)

end InfoSys
end DomainTheory.InformationSystems
```

LamConN_empty.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConN_empty (n : ℕ) : LamConN A n (∅ : Finset (RawLamToken α)) := by
  induction n with
  | zero =>
    change lamAtomFinset ∅ ∈ A.Con ∧ lamFunFinset ∅ = ∅
    rw [lamAtomFinset_empty, lamFunFinset_empty]
    exact ⟨A.con_empty, rfl⟩
  | succ n ih => exact Or.inl ih

end InfoSys
```

```
end DomainTheory.InformationSystems
```

LamCon_subset.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamCon_subset {u : Finset (RawLamToken α)} (hu : LamCon A u) :
    ∀ {v}, v ⊆ u → LamCon A v := by
  rcases hu with ⟨n, hu⟩
  induction n generalizing u with
  | zero =>
    intro v hv
    refine ⟨0, ?_⟩
    change lamAtomFinset v ∈ A.Con ∧ lamFunFinset v = ∅
    rcases (hu : lamAtomFinset u ∈ A.Con ∧ lamFunFinset u = ∅) with ⟨hA, hF⟩
    exact ⟨A.con_subset hA (lamAtomFinset_mono hv),
      Finset.Subset.antisymm
        (fun p hp => by
          have : p ∈ lamFunFinset u := lamFunFinset_mono hv hp
          rw [hF] at this; exact False.elim (Finset.notMem_empty p this))
        (Finset.empty_subset _)⟩
  | succ n ih =>
    intro v hv
    rcases hu with hu | ⟨hA, hWF, hFun⟩
    · exact ih hu hv
    · refine ⟨n + 1, Or.inr ⟨?_, ?_, ?_⟩⟩
      · exact Finset.Subset.antisymm
          (fun x hx => by
            have : x ∈ lamAtomFinset u := lamAtomFinset_mono hv hx
            rw [hA] at this; exact False.elim (Finset.notMem_empty x this))
          (Finset.empty_subset _)
      · intro p hp; exact hWF p (lamFunFinset_mono hv hp)
      · intro s hs hIn
        exact hFun s (fun p hp => lamFunFinset_mono hv (hs hp)) hIn

end InfoSys
end DomainTheory.InformationSystems
```

lamAtomFinset_funion.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamAtomFinset_funion (u v : Finset (RawLamToken α)) :
    lamAtomFinset (u ∪' v) = lamAtomFinset u ∪' lamAtomFinset v := by
  ext x
  constructor
  · intro hx
    have : .atom x ∈ u ∪' v := mem_lamAtomFinset.1 hx
    rcases mem_funion.1 this with hu | hv
    · exact mem_funion.2 (Or.inl (mem_lamAtomFinset.2 hu))
    · exact mem_funion.2 (Or.inr (mem_lamAtomFinset.2 hv))
  · intro hx
    rcases mem_funion.1 hx with hu | hv
    · exact mem_lamAtomFinset.2 (mem_funion.2 (Or.inl (mem_lamAtomFinset.1 hu)))
    · exact mem_lamAtomFinset.2 (mem_funion.2 (Or.inr (mem_lamAtomFinset.1 hv)))

end InfoSys
end DomainTheory.InformationSystems
```

LamEntN_mono.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
```

```
variable (A : InfoSys α)

theorem LamEntN_mono {n m : ℕ} (hmn : n ≤ m) {u : Finset (RawLamToken α)}
    {t : RawLamToken α} (ht : LamEntN A n u t) : LamEntN A m u t := by
  induction hmn with
  | refl => exact ht
  | step _ ih => exact Or.inl ih

end InfoSys
end DomainTheory.InformationSystems
```

LamEntN_con.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamEntN_con {n : ℕ} {u : Finset (RawLamToken α)} {t : RawLamToken α}
    (ht : LamEntN A n u t) : LamConN A n u := by
  match n, t with
  | 0, .bot => exact ht
  | 0, .atom _ => exact ht.1
  | 0, .funTok _ _ => exact False.elim ht
  | n + 1, t =>
    rcases ht with ht | ht
    · exact Or.inl (LamEntN_con (n := n) ht)
    · match t with
      | .bot => exact ht
      | .atom _ => exact ht.1
      | .funTok _ _ => exact ht.1

end InfoSys
end DomainTheory.InformationSystems
```

LamEnt_con.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
```

```
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntN_con

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamEnt_con {u : Finset (RawLamToken α)} {t : RawLamToken α}
    (ht : LamEnt A u t) : LamCon A u := by
  rcases ht with ⟨n, ht⟩
  exact ⟨n, LamEntN_con A ht⟩

end InfoSys
end DomainTheory.InformationSystems
```

mem_lamForgetFinset.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem mem_lamForgetFinset {u : Finset (LamToken A)} {t : RawLamToken α} :
    t ∈ lamForgetFinset A u ↔ ∃ p ∈ u, p.val = t := by
  simpa [lamForgetFinset] using mem_foldr_lamForget A u.1 t

end InfoSys
end DomainTheory.InformationSystems
```

lamForgetFinset_singleton.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamForgetFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamForgetFinset_singleton (p : LamToken A) :
    lamForgetFinset A {p} = {p.val} := by
  ext t
  constructor
  · intro ht
    rcases (mem_lamForgetFinset A).1 ht with ⟨q, hq, hq'⟩
    have : q = p := Finset.mem_singleton.mp hq
    subst this; exact Finset.mem_singleton.mpr hq'.symm
  · intro ht
    exact (mem_lamForgetFinset A).2
      ⟨p, Finset.mem_singleton_self p, (Finset.mem_singleton.mp ht).symm⟩

end InfoSys
end DomainTheory.InformationSystems
```

LamTokenCon_subset.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamCon_subset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamForgetFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive
```

```
namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamTokenCon_subset {u v : Finset (LamToken A)}
    (hu : LamTokenCon A u) (hv : v ⊆ u) : LamTokenCon A v :=
  LamCon_subset A hu (by
    intro t ht
    rcases (mem_lamForgetFinset A).1 ht with ⟨p, hp, rfl⟩
    exact (mem_lamForgetFinset A).2 ⟨p, hv hp, rfl⟩)

end InfoSys
end DomainTheory.InformationSystems
```

LamDCon_empty.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamDForgetFinset_empty

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamDCon_empty : LamDCon A (∅ : Finset (LamDToken A)) := by
  simpa [LamDCon, lamDForgetFinset_empty] using LamConDepth_empty A

end InfoSys
end DomainTheory.InformationSystems
```

lamForgetFinset_insert.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamForgetFinset
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamForgetFinset_insert (u : Finset (LamToken A)) (p : LamToken A) :
    lamForgetFinset A (insert p u) = insert p.val (lamForgetFinset A u) := by
  ext t
  constructor
  · intro ht
    rcases (mem_lamForgetFinset A).1 ht with ⟨q, hq, rfl⟩
    rcases Finset.mem_insert.mp hq with rfl | hq
    · exact Finset.mem_insert_self _ _
    · exact Finset.mem_insert_of_mem ((mem_lamForgetFinset A).2 ⟨q, hq, rfl⟩)
  · intro ht
    rcases Finset.mem_insert.mp ht with rfl | ht
    · exact (mem_lamForgetFinset A).2 ⟨p, Finset.mem_insert_self p u, rfl⟩
    · rcases (mem_lamForgetFinset A).1 ht with ⟨q, hq, rfl⟩
      exact (mem_lamForgetFinset A).2 ⟨q, Finset.mem_insert_of_mem hq, rfl⟩

end InfoSys
end DomainTheory.InformationSystems
```

LamConN_exists_FunCon.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConN_exists_FunCon {n : ℕ} {u : Finset (RawLamToken α)}
    (hu : LamConN A n u) (hne : lamFunFinset u = ∅) :
    ∃ k, k + 1 ≤ n ∧ lamAtomFinset u = ∅ ∧
```

```
      (∀ p ∈ lamFunFinset u,
        LamConN A k (listToFinset p.1) ∧ LamConN A k (listToFinset p.2)) ∧
      (∀ s ⊆ lamFunFinset u,
        LamConN A k (lamInputUnion s) → LamConN A k (lamOutputUnion s)) := by
  induction n generalizing u with
  | zero => exact False.elim (hne hu.2)
  | succ n ih =>
    rcases hu with hu | ⟨hA, hWF, hFun⟩
    · rcases ih hu hne with ⟨k, hk, H⟩
      exact ⟨k, Nat.le_succ_of_le hk, H⟩
    · exact ⟨n, Nat.le_refl _, hA, hWF, hFun⟩

end InfoSys
end DomainTheory.InformationSystems
```

LamConN_insert_bot.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConN_insert_bot {n : ℕ} {u : Finset (RawLamToken α)}
    (hu : LamConN A n u) : LamConN A n (insert (.bot : RawLamToken α) u) := by
  induction n generalizing u with
  | zero =>
    exact ⟨by rw [lamAtomFinset_insert_bot]; exact hu.1,
      by rw [lamFunFinset_insert_bot]; exact hu.2⟩
  | succ n ih =>
    rcases hu with hu | ⟨hA, hWF, hFun⟩
    · exact Or.inl (ih hu)
    · exact Or.inr ⟨by rw [lamAtomFinset_insert_bot]; exact hA,
        fun p hp => hWF p (by rwa [lamFunFinset_insert_bot] at hp),
        fun s hs hIn =>
          hFun s (fun p hp => by rw [← lamFunFinset_insert_bot u]; exact hs hp) hIn⟩

end InfoSys
end DomainTheory.InformationSystems
```

LamConN_insert_of_ent_bot.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntN_con
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConN_insert_bot

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConN_insert_of_ent_bot {n : ℕ} {u : Finset (RawLamToken α)}
    (ht : LamEntN A n u .bot) : LamConN A n (insert (.bot : RawLamToken α) u) :=
  LamConN_insert_bot A (LamEntN_con A ht)

end InfoSys
end DomainTheory.InformationSystems
```

lamRhs_eq_sum_function.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamRhs_eq_sum_function :
    lamRhs A = sumSystem A (functionSystem (lambdaSystem A) (lambdaSystem A)) :=
  rfl
```

```
end InfoSys
end DomainTheory.InformationSystems
```

Factoid82.lean

```
module

public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamRhs_eq_sum_function

@[expose] public section

namespace DomainTheory.InformationSystems.InfoSys

set_option linter.unusedVariables false

theorem theorem_82.{u_1} : ∀ {α : Type u_1} [inst : DecidableEq α] (A : @DomainTheory.
    InformationSystems.InfoSys α inst),
  @Eq
    (@DomainTheory.InformationSystems.InfoSys
      (DomainTheory.InformationSystems.InfoSys.SumToken α
        (@DomainTheory.InformationSystems.InfoSys.FunToken (@DomainTheory.
    InformationSystems.InfoSys.LamDToken α inst A)
          (@DomainTheory.InformationSystems.InfoSys.LamDToken α inst A)
          (@DomainTheory.InformationSystems.InfoSys.instDecidableEqLamDToken α inst A)
          (@DomainTheory.InformationSystems.InfoSys.instDecidableEqLamDToken α inst A)
          (@DomainTheory.InformationSystems.InfoSys.lambdaSystem α inst A)
          (@DomainTheory.InformationSystems.InfoSys.lambdaSystem α inst A)))
      fun
        (a b :
          DomainTheory.InformationSystems.InfoSys.SumToken α
            (@DomainTheory.InformationSystems.InfoSys.FunToken
              (@DomainTheory.InformationSystems.InfoSys.LamDToken α inst A)
              (@DomainTheory.InformationSystems.InfoSys.LamDToken α inst A)
              (@DomainTheory.InformationSystems.InfoSys.instDecidableEqLamDToken α
    inst A)
              (@DomainTheory.InformationSystems.InfoSys.instDecidableEqLamDToken α
    inst A)
              (@DomainTheory.InformationSystems.InfoSys.lambdaSystem α inst A)
              (@DomainTheory.InformationSystems.InfoSys.lambdaSystem α inst A))) =>
        @DomainTheory.InformationSystems.InfoSys.instDecidableEqSumToken α
          (@DomainTheory.InformationSystems.InfoSys.FunToken (@DomainTheory.
    InformationSystems.InfoSys.LamDToken α inst A)
            (@DomainTheory.InformationSystems.InfoSys.LamDToken α inst A)
            (@DomainTheory.InformationSystems.InfoSys.instDecidableEqLamDToken α inst A)
            (@DomainTheory.InformationSystems.InfoSys.instDecidableEqLamDToken α inst A)
            (@DomainTheory.InformationSystems.InfoSys.lambdaSystem α inst A)
            (@DomainTheory.InformationSystems.InfoSys.lambdaSystem α inst A))
          inst
          (@DomainTheory.InformationSystems.InfoSys.instDecidableEqFunToken
            (@DomainTheory.InformationSystems.InfoSys.LamDToken α inst A)
            (@DomainTheory.InformationSystems.InfoSys.LamDToken α inst A)
            (@DomainTheory.InformationSystems.InfoSys.instDecidableEqLamDToken α inst A)
            (@DomainTheory.InformationSystems.InfoSys.instDecidableEqLamDToken α inst A)
            (@DomainTheory.InformationSystems.InfoSys.lambdaSystem α inst A)
```

```
          (@DomainTheory.InformationSystems.InfoSys.lambdaSystem α inst A))
        a b)
    (@DomainTheory.InformationSystems.InfoSys.lamRhs α inst A)
    (@DomainTheory.InformationSystems.InfoSys.sumSystem α
      (@DomainTheory.InformationSystems.InfoSys.FunToken (@DomainTheory.
    InformationSystems.InfoSys.LamDToken α inst A)
        (@DomainTheory.InformationSystems.InfoSys.LamDToken α inst A)
        (@DomainTheory.InformationSystems.InfoSys.instDecidableEqLamDToken α inst A)
        (@DomainTheory.InformationSystems.InfoSys.instDecidableEqLamDToken α inst A)
        (@DomainTheory.InformationSystems.InfoSys.lambdaSystem α inst A)
        (@DomainTheory.InformationSystems.InfoSys.lambdaSystem α inst A))
      inst
      (@DomainTheory.InformationSystems.InfoSys.instDecidableEqFunToken
        (@DomainTheory.InformationSystems.InfoSys.LamDToken α inst A)
        (@DomainTheory.InformationSystems.InfoSys.LamDToken α inst A)
        (@DomainTheory.InformationSystems.InfoSys.instDecidableEqLamDToken α inst A)
        (@DomainTheory.InformationSystems.InfoSys.instDecidableEqLamDToken α inst A)
        (@DomainTheory.InformationSystems.InfoSys.lambdaSystem α inst A)
        (@DomainTheory.InformationSystems.InfoSys.lambdaSystem α inst A))
      A
      (@DomainTheory.InformationSystems.InfoSys.functionSystem
        (@DomainTheory.InformationSystems.InfoSys.LamDToken α inst A)
        (@DomainTheory.InformationSystems.InfoSys.LamDToken α inst A)
        (@DomainTheory.InformationSystems.InfoSys.instDecidableEqLamDToken α inst A)
        (@DomainTheory.InformationSystems.InfoSys.instDecidableEqLamDToken α inst A)
        (@DomainTheory.InformationSystems.InfoSys.lambdaSystem α inst A)
        (@DomainTheory.InformationSystems.InfoSys.lambdaSystem α inst A))) :=
  @DomainTheory.InformationSystems.InfoSys.lamRhs_eq_sum_function

end DomainTheory.InformationSystems.InfoSys
```

LamConN_down_atom.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConN_down_atom {n : ℕ} {u : Finset (RawLamToken α)}
    (hu : LamConN A n u) (hF : lamFunFinset u = ∅) : LamConN A 0 u := by
  induction n generalizing u with
```

```
  | zero => exact hu
  | succ n ih =>
    rcases hu with hu | ⟨hA, _, _⟩
    · exact ih hu hF
    · exact ⟨by rw [hA]; exact A.con_empty, hF⟩

end InfoSys
end DomainTheory.InformationSystems
```

lamUnfold_atom.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamUnfold_atom (x : α) :
    lamUnfold A ⟨.atom x, ⟨trivial⟩⟩ = SumToken.left x := rfl

end InfoSys
end DomainTheory.InformationSystems
```

LamConN_fun_FunCon_right.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
```

```
variable (A : InfoSys α)

theorem LamConN_fun_FunCon_right {n : ℕ} {u : Finset (RawLamToken α)}
    (_hA : lamAtomFinset u = ∅)
    (_hWF : ∀ p ∈ lamFunFinset u,
      LamConN A n (listToFinset p.1) ∧ LamConN A n (listToFinset p.2))
    (hFun : ∀ s ⊆ lamFunFinset u,
      LamConN A n (lamInputUnion s) → LamConN A n (lamOutputUnion s))
    {s : Finset (List (RawLamToken α) × List (RawLamToken α))}
    (hs : s ⊆ lamFunFinset u) (hIn : LamConN A n (lamInputUnion s)) :
    LamConN A n (lamOutputUnion s) :=
  hFun s hs hIn

end InfoSys
end DomainTheory.InformationSystems
```

LamCon_singleton_bot.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamCon_singleton_bot : LamCon A ({.bot} : Finset (RawLamToken α)) := by
  refine ⟨0, ?_⟩
  change lamAtomFinset _ ∈ A.Con ∧ lamFunFinset _ = ∅
  constructor
  · have h : lamAtomFinset ({.bot} : Finset (RawLamToken α)) = ∅ := by
      ext x
      constructor
      · intro hx; exact False.elim (nomatch mem_lamAtomFinset.1 hx)
      · intro hx; exact False.elim (Finset.notMem_empty x hx)
    rw [h]; exact A.con_empty
  · ext p
    constructor
    · intro hp; exact False.elim (nomatch mem_lamFunFinset.1 hp)
    · intro hp; exact False.elim (Finset.notMem_empty p hp)

end InfoSys
end DomainTheory.InformationSystems
```

LamCon_empty.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamCon_empty : LamCon A (∅ : Finset (RawLamToken α)) :=
  ⟨0, by
    change lamAtomFinset ∅ ∈ A.Con ∧ lamFunFinset ∅ = ∅
    rw [lamAtomFinset_empty, lamFunFinset_empty]
    exact ⟨A.con_empty, rfl⟩⟩

end InfoSys
end DomainTheory.InformationSystems
```

lamUnfold_bot.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamUnfold_bot : lamUnfold A (lamDBot A) = SumToken.bot := rfl

end InfoSys
end DomainTheory.InformationSystems
```

lamForgetFinset_empty.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lamForgetFinset_empty : lamForgetFinset A (∅ : Finset (LamToken A)) = ∅ :=
  rfl

end InfoSys
end DomainTheory.InformationSystems
```

LamTokenCon_empty.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamCon_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamForgetFinset_empty

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamTokenCon_empty : LamTokenCon A (∅ : Finset (LamToken A)) := by
  simpa [LamTokenCon, lamForgetFinset_empty] using LamCon_empty A

end InfoSys
```

```
end DomainTheory.InformationSystems
```

LamConN_mono.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConN_mono {n m : ℕ} (hmn : n ≤ m) {u : Finset (RawLamToken α)}
    (hu : LamConN A n u) : LamConN A m u := by
  induction hmn with
  | refl => exact hu
  | step _ ih => exact Or.inl ih

end InfoSys
end DomainTheory.InformationSystems
```

LamConN_FunCon_mono_atom.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConN_mono
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConN_down_atom

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
```

```
variable (A : InfoSys α)

theorem LamConN_FunCon_mono_atom {k m : ℕ} (hkm : k ≤ m)
    {u : Finset (RawLamToken α)}
    (hFun : ∀ s ⊆ lamFunFinset u,
      LamConN A k (lamInputUnion s) → LamConN A k (lamOutputUnion s))
    {s : Finset (List (RawLamToken α) × List (RawLamToken α))}
    (hs : s ⊆ lamFunFinset u)
    (hIn : LamConN A m (lamInputUnion s))
    (hF : lamFunFinset (lamInputUnion s) = ∅) :
    LamConN A m (lamOutputUnion s) := by
  have h0 := LamConN_down_atom A hIn hF
  have hk : LamConN A k (lamInputUnion s) := LamConN_mono A (Nat.zero_le k) h0
  exact LamConN_mono A hkm (hFun s hs hk)

end InfoSys
end DomainTheory.InformationSystems
```

LamConN_fun_wf.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConN_mono

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConN_fun_wf {n : ℕ} {u : Finset (RawLamToken α)}
    {p : List (RawLamToken α) × List (RawLamToken α)}
    (hu : LamConN A (n + 1) u) (hp : p ∈ lamFunFinset u) :
    LamConN A n (listToFinset p.1) ∧ LamConN A n (listToFinset p.2) := by
  have aux {m : ℕ} {w : Finset (RawLamToken α)}
      (hw : LamConN A m w) (hq : p ∈ lamFunFinset w) :
      ∃ k, k + 1 ≤ m ∧
        LamConN A k (listToFinset p.1) ∧ LamConN A k (listToFinset p.2) := by
    induction m generalizing w with
    | zero =>
      exact False.elim (by
        have : p ∈ (∅ : Finset _) := by rw [← hw.2]; exact hq
        exact Finset.notMem_empty p this)
    | succ m ih =>
```

```
      rcases hw with hw | ⟨_, hWF, _⟩
      · rcases ih hw hq with ⟨k, hk, hk'⟩
        exact ⟨k, Nat.le_succ_of_le hk, hk'⟩
      · exact ⟨m, Nat.le_refl _, hWF p hq⟩
  rcases aux hu hp with ⟨k, hk, h1, h2⟩
  have hk' : k ≤ n := Nat.le_of_succ_le_succ hk
  exact ⟨LamConN_mono A hk' h1, LamConN_mono A hk' h2⟩

end InfoSys
end DomainTheory.InformationSystems
```

LamConN_fun_FunCon_atom.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConN_empty
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConN_exists_FunCon
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConN_FunCon_mono_atom

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConN_fun_FunCon_atom {n : ℕ} {u : Finset (RawLamToken α)}
    (hu : LamConN A (n + 1) u)
    {s : Finset (List (RawLamToken α) × List (RawLamToken α))}
    (hs : s ⊆ lamFunFinset u) (hIn : LamConN A n (lamInputUnion s))
    (hF : lamFunFinset (lamInputUnion s) = ∅) :
    LamConN A n (lamOutputUnion s) := by
  if hempty : s = ∅ then
    subst hempty
    simpa [lamOutputUnion_empty] using LamConN_empty A n
  else
    have hne : lamFunFinset u = ∅ := by
      obtain ⟨p, hp⟩ := Finset.nonempty_of_ne_empty hempty
      exact Finset.ne_empty_of_mem (hs hp)
    rcases LamConN_exists_FunCon A hu hne with ⟨k, hk, _, _, hFun⟩
    have hkn : k ≤ n := Nat.le_of_succ_le_succ hk
    exact LamConN_FunCon_mono_atom A hkn hFun hs hIn hF
```

```
end InfoSys
end DomainTheory.InformationSystems
```

LamCon_singleton_funTok.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConN_mono
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConN_empty

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamCon_singleton_funTok (u v : List (RawLamToken α))
    (hu : LamCon A (listToFinset u)) (hv : LamCon A (listToFinset v)) :
    LamCon A ({.funTok u v} : Finset (RawLamToken α)) := by
  rcases hu with ⟨n, hu⟩
  rcases hv with ⟨m, hv⟩
  let k := max n m
  refine ⟨k + 1, Or.inr ⟨?_, ?_, ?_⟩⟩
  · exact lamAtomFinset_singleton_funTok u v
  · intro p hp
    have : p = (u, v) := by
      have h := Finset.mem_singleton.mp (by
        rw [← lamFunFinset_singleton_funTok u v]; exact hp)
      exact h
    subst this
    exact ⟨LamConN_mono A (Nat.le_max_left n m) hu,
      LamConN_mono A (Nat.le_max_right n m) hv⟩
  · intro s hs hIn
    have hFun : lamFunFinset ({.funTok u v} : Finset (RawLamToken α)) = {(u, v)} :=
      lamFunFinset_singleton_funTok u v
    rw [hFun] at hs
    if hmem : (u, v) ∈ s then
      have hsin : s = {(u, v)} := by
        ext p
        constructor
        · intro hp
          exact Finset.mem_singleton.mpr (Finset.mem_singleton.mp (hs hp))
        · intro hp
```

```
          have : p = (u, v) := Finset.mem_singleton.mp hp
          subst this; exact hmem
      subst hsin
      rw [lamOutputUnion_singleton]
      exact LamConN_mono A (Nat.le_max_right n m) hv
    else
      have hempty : s = ∅ := by
        ext p
        constructor
        · intro hp
          exact False.elim (hmem (by
            have : p = (u, v) := Finset.mem_singleton.mp (hs hp)
            subst this; exact hp))
        · intro hp
          exact False.elim (Finset.notMem_empty p hp)
      subst hempty
      exact LamConN_empty A k

end InfoSys
end DomainTheory.InformationSystems
```

LamCon_of_forget_singleton.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamCon_singleton_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamCon_singleton_atom
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    lamForgetFinset_singleton
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamCon_singleton_funTok

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamCon_of_forget_singleton (p : LamToken A) :
    LamCon A (lamForgetFinset A {p}) := by
  rw [lamForgetFinset_singleton]
  match p with
  | ⟨.bot, _⟩ => exact LamCon_singleton_bot A
```

```
  | ⟨.atom x, _⟩ => exact LamCon_singleton_atom A x
  | ⟨.funTok u v, hWF⟩ => exact LamCon_singleton_funTok A u v hWF.out.1 hWF.out.2

end InfoSys
end DomainTheory.InformationSystems
```

LamTokenCon_singleton.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamCon_of_forget_singleton

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamTokenCon_singleton (p : LamToken A) : LamTokenCon A {p} :=
  LamCon_of_forget_singleton A p

end InfoSys
end DomainTheory.InformationSystems
```

LamEntN_of_mem.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConN_fun_wf

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]
```

```
variable (A : InfoSys α)

theorem LamEntN_of_mem {n : ℕ} {u : Finset (RawLamToken α)} {t : RawLamToken α}
    (hu : LamConN A n u) (ht : t ∈ u) : LamEntN A n u t := by
  induction n generalizing u t with
  | zero =>
    match t with
    | .bot => exact hu
    | .atom x =>
      exact ⟨hu, Finset.ne_empty_of_mem (mem_lamAtomFinset.2 ht),
        A.ent_refl hu.1 (mem_lamAtomFinset.2 ht)⟩
    | .funTok _ _ =>
      exact False.elim (by
        have hp : (_, _) ∈ lamFunFinset u := mem_lamFunFinset.2 ht
        rw [hu.2] at hp; exact Finset.notMem_empty _ hp)
  | succ n ih =>
    rcases hu with hu | hRight
    · exact Or.inl (ih hu ht)
    · have huFull : LamConN A (n + 1) u := Or.inr hRight
      match t with
      | .bot => exact Or.inr huFull
      | .atom x =>
        exact False.elim (by
          have : x ∈ lamAtomFinset u := mem_lamAtomFinset.2 ht
          rw [hRight.1] at this; exact Finset.notMem_empty x this)
      | .funTok xs ys =>
        have hmem : (xs, ys) ∈ lamFunFinset u := mem_lamFunFinset.2 ht
        have hWF := LamConN_fun_wf A huFull hmem
        refine Or.inr ⟨huFull, hRight.1, hWF.1, hWF.2, ⟨{(xs, ys)}, ?_, ?_, ?_⟩⟩
        · intro p hp
          have : p = (xs, ys) := Finset.mem_singleton.mp hp
          subst this
          exact hmem
        · intro p hp t ht'
          have : p = (xs, ys) := Finset.mem_singleton.mp hp
          subst this
          exact ih hWF.1 ht'
        · intro t ht'
          rw [lamOutputUnion_singleton (xs, ys)]
          exact ih hWF.2 ht'

end InfoSys
end DomainTheory.InformationSystems
```

LamEnt_of_mem.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEntN_of_mem
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamEnt_of_mem {u : Finset (RawLamToken α)} {t : RawLamToken α}
    (hu : LamCon A u) (ht : t ∈ u) : LamEnt A u t := by
  rcases hu with ⟨n, hu⟩
  exact ⟨n, LamEntN_of_mem A hu ht⟩

end InfoSys
end DomainTheory.InformationSystems
```

LamTokenEnt_of_mem.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    mem_lamForgetFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamEnt_of_mem

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamTokenEnt_of_mem {u : Finset (LamToken A)} {p : LamToken A}
    (hu : LamTokenCon A u) (hp : p ∈ u) : LamTokenEnt A u p :=
  LamEnt_of_mem A hu ((mem_lamForgetFinset A).2 ⟨p, hp, rfl⟩)

end InfoSys
end DomainTheory.InformationSystems
```

lambdaSystem_con_axioms.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamTokenCon_singleton
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamTokenCon_subset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamTokenEnt_bot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamTokenEnt_of_mem

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem lambdaSystem_con_axioms :
    (∀ {u v : Finset (LamToken A)}, LamTokenCon A u → v ⊆ u → LamTokenCon A v) ∧
      (∀ p : LamToken A, LamTokenCon A {p}) ∧
        (∀ {u : Finset (LamToken A)}, LamTokenCon A u → LamTokenEnt A u (lamBot A)) ∧
          (∀ {u : Finset (LamToken A)} {p : LamToken A},
            LamTokenCon A u → p ∈ u → LamTokenEnt A u p) :=
  ⟨fun hu hv => LamTokenCon_subset A hu hv,
    LamTokenCon_singleton A,
    fun hu => LamTokenEnt_bot A hu,
    fun hu hp => LamTokenEnt_of_mem A hu hp⟩

end InfoSys
end DomainTheory.InformationSystems
```

LamConN_insert_of_ent_atom.lean

```
module

public import DomainTheory.InformationSystems.FunctionSpaceAsADomain.FunctionSpace
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Sum
public import Mathlib.Data.Finset.Card
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.Basic
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid82.
    LamConN_mono

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
open DomainTheory.InformationSystems.Constructive

namespace InfoSys

variable {α : Type*} [DecidableEq α]

variable (A : InfoSys α)

theorem LamConN_insert_of_ent_atom {n : ℕ} {u : Finset (RawLamToken α)} {x : α}
    (ht : LamEntN A n u (.atom x)) : LamConN A n (insert (.atom x) u) := by
  induction n generalizing u with
  | zero =>
    rcases ht with ⟨⟨_, hF⟩, _, hEnt⟩
    exact ⟨by rw [lamAtomFinset_insert_atom]; exact A.ent_con hEnt,
      by rw [lamFunFinset_insert_atom]; exact hF⟩
  | succ n ih =>
    rcases ht with ht | ⟨_, hF, _, hEnt⟩
    · exact Or.inl (ih ht)
    · exact LamConN_mono A (Nat.zero_le (n + 1))
        ⟨by rw [lamAtomFinset_insert_atom]; exact A.ent_con hEnt,
          by rw [lamFunFinset_insert_atom]; exact hF⟩

end InfoSys
end DomainTheory.InformationSystems
```

4.8.3 Factoid 8.3

A universal domain. As a final example of building up domains recursively, we give a construction of a "universal" domain U. (The reason for the name will be explained presently.) The best way to define U seems to be to define a domain V with a top element first, and then to remove the top.

The recursion for V is remarkably simple. We begin with two distinct objects Δ and ∇ that give information about the bottom and top of V, respectively. Thus, $\Delta_V = \Delta$ by definition. We assume that these two special data objects are "atomic" in the sense that they are not equal to any ordered pair of objects. For the definition of D_V we have these clauses:

(1) $\Delta, \nabla \in D_V$;

(2) $(X, \Delta) \in D_V$ and $(\Delta, Y) \in D_V$ whenever $X, Y \in D_V$.

In other words, we begin with two objects and close up under two flavors of copies of these objects. (A product result is involved here, so that is the reason for structuring the flavors the way we have.)

For V all subsets of D_V are consistent, so all we have left is to define entailment for this domain. The clauses are:

(3) $u \vdash_V \Delta$ always;

(4) $u \vdash_V \nabla$ whenever either $\nabla \in u$ or $\{X \mid (X, \Delta) \in u\} \vdash_V \nabla$ and $\{Y \mid (\Delta, Y) \in u\} \vdash_V \nabla$;

(5) $u \vdash_V (X', \Delta)$ whenever either $\nabla \in u$ or $\{X \mid (X, \Delta) \in u\} \vdash_V X'$; and

(6) $u \vdash_V (\Delta, Y')$ whenever either $\nabla \in u$ or $\{Y \mid (\Delta, Y) \in u\} \vdash_V Y'$.

The proof that V is an information system proceeds as before. Note that, under the above definition of entailment, the data objects Δ, (Δ, Δ), $((\Delta, \Delta), \Delta)$, etc. are all equivalent. There is, however, no other data object equivalent to ∇. The domain equation satisfied by V is:

$$V \cong V \times V.$$

Of course, there are an unlimited number of solutions to this equation, so the fact that V satisfies it tells us very little.

Because ∇ entails everything, we can regard it as a "rogue" object that ought to be banned from polite company: the only element of V it gives any information about is the top element, which is as unhelpful as any element could be. We should simply throw it out as being "inconsistent." What remains is the domain U. Formally we have:

(7) $D_U = D_V - \{\nabla\}$;

(8) $\Delta_U = \Delta_V$;

(9) $\mathrm{Con}_U = \{u \subseteq D_U \mid u \text{ finite and } u \not\vdash_V \nabla\}$; and

(10) $u \vdash_U Y$ iff $u \in \mathrm{Con}_U$, $Y \in D_U$ and $u \vdash_V Y$. The same style of definition would work in any situation when an information system has a rogue data object that entails everything: there always is a system that results from eliminating all those objects that entail everything. Indeed, we could have always included such an object in any domain and altered the definition to take as elements those deductively closed sets of data objects that *do* not have the rogue object as a member. We did not do this for the reason that superfluous elements cause lots of exceptions in constructs such as product, where there is a temptation to let them enter into various combinations.

Now in U we *do* allow ∇ to enter into combinations—and this is part of the secret of the construction. The consequence is, however, that the domain equation which U satisfies is not too easy to state since it involves an unfamiliar functor. So it is not through such equations that we will understand its nature in a direct way. But it is possible to explain how it works by reference to the steps in the construction.

Imagine the full (infinite) binary tree. The data objects of U are giving information about possible paths in the tree. We think to the tree starting at the root node at the top of the page and growing down. The object Δ gives no information—so no paths are *excluded*. (If we would have allowed ∇, then the information it would have been giving is that all paths are excluded.) The data object (X, Δ) tells us about a path that *either* it is unrestricted on the right half of the tree, *or* on the left, when we start at the node directly below the root, the paths that are excluded from the subtree are those excluded according to X. This makes sense because the subtrees of the binary tree look exactly like the whole tree, so information can be relativized or translated to other positions. With (Δ, Y) the rôles of right and left are interchanged. We could have introduced data objects of the form (X, Y) which tell us information about both halves of the tree at the same time, but the consistent set $\{(X, \Delta), (\Delta, Y)\}$ does the same job. In general consistent sets should be thought of as *conjunctions*; while, in this example, the comma in the ordered pair should be thought of as a *disjunction* when "reading" information objects.

We can now see that a single data object (if it contains ∇) looks down the tree along a finite path to some depth and then *excludes* the rest of the tree below that node. A consistent set of data objects leaves at least one hole, so at least one path is not excluded. The maximal consistent sets of information objects are those giving true information about one single (infinite) path—the total elements of the domain U correspond

exactly to the infinite paths in the binary tree. The partial elements are harder to describe geometrically, however. In accumulating information into a consistent set, holes can be left all over the tree. A partial object is therefore of an indeterminate character, since the "path" we are describing might sneak through any one of the holes. (There is, by the way, a precise topological explanation of what is happening. The total elements of U form a well-known topological space, the so-called Cantor space, and the partially ordered set of elements of U is isomorphic to the lattice of *open* sets of the space—save that the whole space is not allowed.)

This is all very well, but what, we ask, is the good of this domain, and why is it called "universal". The proof cannot be given here, but the result is as follows. As a consequence of standard facts about countable Boolean algebras, it can be proved that every "countably based" domain is a subdomain of U. More specifically, if $\mathbf{A}$ is an information system, and if $D_{\mathbf{A}}$ is countable, then there exists a pair of approximable mappings

$$a : \mathbf{A} \to \mathbf{U} \text{ and } b : \mathbf{U} \to \mathbf{A},$$

such that

$$b \circ a = I_{\mathbf{A}} \text{ and } a \circ b \subseteq I_{\mathbf{U}}.$$

This makes $\mathbf{A}$ a special kind of retract of $\mathbf{U}$. The mappings a and b are far from unique, but at least there is one way to give a one-one embedding of the elements of $\mathbf{A}$ into the elements of $\mathbf{U}$.

The universal property of $\mathbf{U}$ can be applied quite widely. For example, since $(\mathbf{U} \to \mathbf{U})$ is a system with only countably many data objects (by explicit construction!), this system is a retract of $\mathbf{U}$. Fixing on one such retraction pair as above, makes $\mathbf{U}$ also into a model of the λ-calculus. Whether different retractions give essentially different models I do not know. But the point of the remark is to show that domains can contain their own function spaces for a variety of interesting reasons. ?

VToken.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

inductive VToken where
  | bot : VToken
  | top : VToken
  | pairL : VToken → VToken
  | pairR : VToken → VToken
  deriving DecidableEq

end InfoSys
end DomainTheory.InformationSystems
```

vPairRFinset.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys
private def pairRInsert : VToken → Finset VToken → Finset VToken
  | .pairR t => insert t
  | .bot | .top | .pairL _ => id

instance :
    LeftCommutative (pairRInsert : VToken → Finset VToken → Finset VToken) :=
  ⟨fun p q s => by cases p <;> cases q <;> first | exact insert_comm' _ _ s | rfl⟩

def vPairRFinset (u : Finset VToken) : Finset VToken :=
  Multiset.foldr pairRInsert (∅ : Finset VToken) u.1

private theorem mem_foldr_pairR (s : Multiset VToken) (t : VToken) :
    t ∈ Multiset.foldr pairRInsert (∅ : Finset VToken) s ↔
      ∃ p ∈ s, p = .pairR t := by
  refine Multiset.induction_on s ?_ ?_
  · constructor
    · intro ht; exact False.elim (Finset.notMem_empty t ht)
    · rintro ⟨_, hp, _⟩; exact False.elim (by cases hp)
  · intro p rest ih
    cases p with
    | pairR a =>
      simp only [Multiset.foldr_cons, pairRInsert, Finset.mem_insert, ih, Multiset.
    mem_cons]
      constructor
      · rintro (ht | ⟨q, hq, hq'⟩)
        · exact ⟨.pairR a, Or.inl rfl, congrArg VToken.pairR ht.symm⟩
        · exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · injection hq' with ht; exact Or.inl ht.symm
        · exact Or.inr ⟨q, hq, hq'⟩
    | bot | top | pairL _ =>
      simp only [Multiset.foldr_cons, pairRInsert, id_eq, ih, Multiset.mem_cons]
      constructor
      · rintro ⟨q, hq, hq'⟩; exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · exact False.elim (nomatch hq')
        · exact ⟨q, hq, hq'⟩

theorem mem_vPairRFinset {u : Finset VToken} {t : VToken} :
    t ∈ vPairRFinset u ↔ .pairR t ∈ u := by
```

```
  simpa [vPairRFinset] using mem_foldr_pairR u.1 t

theorem vPairRFinset.empty : vPairRFinset (∅ : Finset VToken) = ∅ := rfl

theorem vPairRFinset.insert_top (u : Finset VToken) :
    vPairRFinset (insert (.top : VToken) u) = vPairRFinset u := by
  ext t; simp only [mem_vPairRFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

mem_vPairRFinset.lean

```
module

public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset
```

vPairLFinset.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys
private def pairLInsert : VToken → Finset VToken → Finset VToken
  | .pairL t => insert t
  | .bot | .top | .pairR _ => id

instance :
    LeftCommutative (pairLInsert : VToken → Finset VToken → Finset VToken) :=
  ⟨fun p q s => by cases p <;> cases q <;> first | exact insert_comm' _ _ s | rfl⟩

def vPairLFinset (u : Finset VToken) : Finset VToken :=
  Multiset.foldr pairLInsert (∅ : Finset VToken) u.1

private theorem mem_foldr_pairL (s : Multiset VToken) (t : VToken) :
    t ∈ Multiset.foldr pairLInsert (∅ : Finset VToken) s ↔
      ∃ p ∈ s, p = .pairL t := by
  refine Multiset.induction_on s ?_ ?_
  · constructor
    · intro ht; exact False.elim (Finset.notMem_empty t ht)
    · rintro ⟨_, hp, _⟩; exact False.elim (by cases hp)
  · intro p rest ih
```

```
    cases p with
    | pairL a =>
      simp only [Multiset.foldr_cons, pairLInsert, Finset.mem_insert, ih, Multiset.
    mem_cons]
      constructor
      · rintro (ht | ⟨q, hq, hq'⟩)
        · exact ⟨.pairL a, Or.inl rfl, congrArg VToken.pairL ht.symm⟩
        · exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · injection hq' with ht; exact Or.inl ht.symm
        · exact Or.inr ⟨q, hq, hq'⟩
    | bot | top | pairR _ =>
      simp only [Multiset.foldr_cons, pairLInsert, id_eq, ih, Multiset.mem_cons]
      constructor
      · rintro ⟨q, hq, hq'⟩; exact ⟨q, Or.inr hq, hq'⟩
      · rintro ⟨q, hq, hq'⟩
        rcases hq with rfl | hq
        · exact False.elim (nomatch hq')
        · exact ⟨q, hq, hq'⟩

theorem mem_vPairLFinset {u : Finset VToken} {t : VToken} :
    t ∈ vPairLFinset u ↔ .pairL t ∈ u := by
  simpa [vPairLFinset] using mem_foldr_pairL u.1 t

theorem vPairLFinset.insert_top (u : Finset VToken) :
    vPairLFinset (insert (.top : VToken) u) = vPairLFinset u := by
  ext t; simp only [mem_vPairLFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

VEnt.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    mem_vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    mem_vPairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
open DomainTheory.InformationSystems.Constructive

namespace InfoSys

inductive VEnt : Finset VToken → VToken → Prop where
  | bot {u : Finset VToken} : VEnt u .bot
  | top_mem {u : Finset VToken} (h : .top ∈ u) : VEnt u .top
  | top_both {u : Finset VToken}
      (hL : VEnt (vPairLFinset u) .top) (hR : VEnt (vPairRFinset u) .top) :
      VEnt u .top
  | pairL_top {u : Finset VToken} {x : VToken} (h : .top ∈ u) : VEnt u (.pairL x)
  | pairL_proj {u : Finset VToken} {x : VToken}
      (h : VEnt (vPairLFinset u) x) : VEnt u (.pairL x)
  | pairR_top {u : Finset VToken} {y : VToken} (h : .top ∈ u) : VEnt u (.pairR y)
  | pairR_proj {u : Finset VToken} {y : VToken}
      (h : VEnt (vPairRFinset u) y) : VEnt u (.pairR y)

theorem VEnt.of_ent_top {u : Finset VToken} (h : VEnt u .top) (c : VToken) :
    VEnt u c := by
  match c with
  | .bot => exact VEnt.bot
  | .top => exact h
  | .pairL x =>
    cases h with
    | top_mem hm => exact VEnt.pairL_top hm
    | top_both hL _ => exact VEnt.pairL_proj (VEnt.of_ent_top hL x)
  | .pairR y =>
    cases h with
    | top_mem hm => exact VEnt.pairR_top hm
    | top_both _ hR => exact VEnt.pairR_proj (VEnt.of_ent_top hR y)

theorem VEnt.of_mem {u : Finset VToken} {c : VToken}
    (hc : c ∈ u) : VEnt u c := by
  induction c generalizing u with
  | bot => exact VEnt.bot
  | top => exact VEnt.top_mem hc
  | pairL x ih =>
    exact VEnt.pairL_proj (ih (mem_vPairLFinset.2 hc))
  | pairR y ih =>
    exact VEnt.pairR_proj (ih (mem_vPairRFinset.2 hc))

theorem VEnt.pairL_inv {v : Finset VToken} {x : VToken}
    (h : VEnt v (.pairL x)) : .top ∈ v ∨ VEnt (vPairLFinset v) x := by
  cases h with
  | pairL_top hm => exact Or.inl hm
  | pairL_proj h' => exact Or.inr h'

theorem VEnt.pairLFinset_of_EntSet {u v : Finset VToken}
    (hEnts : ∀ y ∈ u, VEnt v y) :
    .top ∈ v ∨ (∀ y ∈ vPairLFinset u, VEnt (vPairLFinset v) y) := by
  by_cases htop : .top ∈ v
  · exact Or.inl htop
  · refine Or.inr ?_
    intro y hy
    have hy' := hEnts _ (mem_vPairLFinset.1 hy)
    rcases VEnt.pairL_inv hy' with hm | hproj
```

```
    · exact False.elim (htop hm)
    · exact hproj

theorem VEnt.pairR_inv {v : Finset VToken} {y : VToken}
    (h : VEnt v (.pairR y)) : .top ∈ v ∨ VEnt (vPairRFinset v) y := by
  cases h with
  | pairR_top hm => exact Or.inl hm
  | pairR_proj h' => exact Or.inr h'

theorem VEnt.pairRFinset_of_EntSet {u v : Finset VToken}
    (hEnts : ∀ y ∈ u, VEnt v y) :
    .top ∈ v ∨ (∀ y ∈ vPairRFinset u, VEnt (vPairRFinset v) y) := by
  by_cases htop : .top ∈ v
  · exact Or.inl htop
  · refine Or.inr ?_
    intro y hy
    have hy' := hEnts _ (mem_vPairRFinset.1 hy)
    rcases VEnt.pairR_inv hy' with hm | hproj
    · exact False.elim (htop hm)
    · exact hproj

theorem VEnt.trans {u v : Finset VToken} {c : VToken}
    (hEnts : ∀ y ∈ u, VEnt v y) (h : VEnt u c) : VEnt v c := by
  induction h generalizing v with
  | bot => exact VEnt.bot
  | top_mem hm => exact hEnts _ hm
  | top_both _ _ ihL ihR =>
    rcases VEnt.pairLFinset_of_EntSet hEnts with hm | hL
    · exact VEnt.of_ent_top (VEnt.top_mem hm) .top
    · rcases VEnt.pairRFinset_of_EntSet hEnts with hm | hR
      · exact VEnt.of_ent_top (VEnt.top_mem hm) .top
      · exact VEnt.top_both (ihL hL) (ihR hR)
  | pairL_top hm => exact VEnt.of_ent_top (hEnts _ hm) _
  | pairL_proj _ ih =>
    rcases VEnt.pairLFinset_of_EntSet hEnts with hm | hL
    · exact VEnt.pairL_top hm
    · exact VEnt.pairL_proj (ih hL)
  | pairR_top hm => exact VEnt.of_ent_top (hEnts _ hm) _
  | pairR_proj _ ih =>
    rcases VEnt.pairRFinset_of_EntSet hEnts with hm | hR
    · exact VEnt.pairR_top hm
    · exact VEnt.pairR_proj (ih hR)

end InfoSys

end DomainTheory.InformationSystems
```

vPairLFinset_insert_bot.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
```

```
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    mem_vPairLFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

theorem vPairLFinset_insert_bot (u : Finset VToken) :
    vPairLFinset (insert (.bot : VToken) u) = vPairLFinset u := by
  ext t; simp only [mem_vPairLFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

vPairRFinset_insert_bot.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    mem_vPairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

theorem vPairRFinset_insert_bot (u : Finset VToken) :
    vPairRFinset (insert (.bot : VToken) u) = vPairRFinset u := by
  ext t; simp only [mem_vPairRFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys
```

```
end DomainTheory.InformationSystems
```

vPairLFinset_insert_pairL.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    mem_vPairLFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

theorem vPairLFinset_insert_pairL (u : Finset VToken) (t : VToken) :
    vPairLFinset (insert (.pairL t) u) = insert t (vPairLFinset u) := by
  ext s; simp only [Finset.mem_insert, mem_vPairLFinset]
  constructor
  · rintro (h | h)
    · exact Or.inl (VToken.pairL.inj h)
    · exact Or.inr h
  · rintro (rfl | h)
    · exact Or.inl rfl
    · exact Or.inr h

end InfoSys

end DomainTheory.InformationSystems
```

vBot.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems
```

```
open DomainTheory.InformationSystems.Constructive

namespace InfoSys

def vBot : VToken := .bot

end InfoSys

end DomainTheory.InformationSystems
```

vPairLFinset_mono.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    mem_vPairLFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

theorem vPairLFinset_mono {u v : Finset VToken} (h : u ⊆ v) :
    vPairLFinset u ⊆ vPairLFinset v := by
  intro t ht
  exact mem_vPairLFinset.2 (h (mem_vPairLFinset.1 ht))

end InfoSys

end DomainTheory.InformationSystems
```

vPairLFinset_insert_pairR.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    mem_vPairLFinset
```

```
@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

theorem vPairLFinset_insert_pairR (u : Finset VToken) (t : VToken) :
    vPairLFinset (insert (.pairR t) u) = vPairLFinset u := by
  ext s; simp only [mem_vPairLFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

vPairRFinset_insert_pairL.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    mem_vPairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

theorem vPairRFinset_insert_pairL (u : Finset VToken) (t : VToken) :
    vPairRFinset (insert (.pairL t) u) = vPairRFinset u := by
  ext s; simp only [mem_vPairRFinset, Finset.mem_insert]
  constructor
  · rintro (h | h); exacts [False.elim (nomatch h), h]
  · exact Or.inr

end InfoSys

end DomainTheory.InformationSystems
```

vTop.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

def vTop : VToken := .top

end InfoSys

end DomainTheory.InformationSystems
```

IsUToken.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

class IsUToken (t : VToken) : Prop where
  out : t = .top

end InfoSys

end DomainTheory.InformationSystems
```

BasicInst33.lean

```
module
```

```
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.IsUToken

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

instance : DecidablePred IsUToken := fun t =>
  if h : t = .top then isFalse fun ht => ht.out h
  else isTrue ⟨h⟩

end InfoSys

end DomainTheory.InformationSystems
```

UToken.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.IsUToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    BasicInst33

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

def UToken : Type := { t : VToken // IsUToken t }

end InfoSys

end DomainTheory.InformationSystems
```

vPairLFinset_empty.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

theorem vPairLFinset_empty : vPairLFinset (∅ : Finset VToken) = ∅ := rfl

end InfoSys

end DomainTheory.InformationSystems
```

VCon.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

def VCon (_u : Finset VToken) : Prop := True

theorem VCon.any (u : Finset VToken) : VCon u := trivial

end InfoSys

end DomainTheory.InformationSystems
```

vSystem.lean

```
module
```

```
public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.vBot
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VCon

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

def vSystem : InfoSys VToken where
  bot := vBot
  Con := {u | VCon u}
  Ent := VEnt
  con_subset := fun _ _ => trivial
  con_sing := fun _ => trivial
  ent_con := fun _ => trivial
  ent_bot := fun _ => VEnt.bot
  ent_refl := fun _ hp => VEnt.of_mem hp
  ent_trans := fun _ _ hEnts h => VEnt.trans hEnts h

end InfoSys

end DomainTheory.InformationSystems
```

vUnfold.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.vSystem

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys
```

```
def vUnfold (t : VToken) : ProdToken vSystem vSystem :=
  match t with
  | .bot => prodBot vSystem vSystem
  | .top => ⟨(.top, .bot), ⟨Or.inr rfl⟩⟩
  | .pairL x => ⟨(x, .bot), ⟨Or.inr rfl⟩⟩
  | .pairR y => ⟨(.bot, y), ⟨Or.inl rfl⟩⟩

theorem vUnfold.bot : vUnfold .bot = prodBot vSystem vSystem := rfl

theorem vUnfold.pairL (x : VToken) :
    vUnfold (.pairL x) = ⟨(x, .bot), ⟨Or.inr rfl⟩⟩ := rfl

theorem vUnfold.pairR (y : VToken) :
    vUnfold (.pairR y) = ⟨(.bot, y), ⟨Or.inl rfl⟩⟩ := rfl

end InfoSys

end DomainTheory.InformationSystems
```

vRhs.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.vSystem

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

def vRhs : InfoSys (ProdToken vSystem vSystem) :=
  productSystem vSystem vSystem

theorem vRhs.eq_product : vRhs = productSystem vSystem vSystem := rfl

end InfoSys

end DomainTheory.InformationSystems
```

vPairRFinset_insert_pairR.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
```

```
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    mem_vPairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

theorem vPairRFinset_insert_pairR (u : Finset VToken) (t : VToken) :
    vPairRFinset (insert (.pairR t) u) = insert t (vPairRFinset u) := by
  ext s; simp only [Finset.mem_insert, mem_vPairRFinset]
  constructor
  · rintro (h | h)
    · exact Or.inl (VToken.pairR.inj h)
    · exact Or.inr h
  · rintro (rfl | h)
    · exact Or.inl rfl
    · exact Or.inr h

end InfoSys

end DomainTheory.InformationSystems
```

vPairRFinset_mono.lean

```
module

public import DomainTheory.InformationSystems.ProductsAndSumsOfDomains.Product
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VToken
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.VEnt
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairLFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    vPairRFinset
public import DomainTheory.InformationSystems.SomeDomainEquations.Factoid83.
    mem_vPairRFinset

@[expose] public section

namespace DomainTheory.InformationSystems

open DomainTheory.InformationSystems.Constructive

namespace InfoSys

theorem vPairRFinset_mono {u v : Finset VToken} (h : u ⊆ v) :
    vPairRFinset u ⊆ vPairRFinset v := by
```

```
  intro t ht
  exact mem_vPairRFinset.2 (h (mem_vPairRFinset.1 ht))

end InfoSys

end DomainTheory.InformationSystems
```

functionSpaceProjection.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceInclFun
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceRetrFun
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

namespace ContinuousLatticeProjection

theorem functionSpace_inclRetrLe {D D' : Type u} [CompleteLattice D] [CompleteLattice
    D']
    (P : ContinuousLatticeProjection D D') :
    ∀ g, functionSpaceInclFun P (functionSpaceRetrFun P g) ≤ g := by
  intro g
  exact ScottMap.le_def.mpr ((FunctionSpace.projection P P).incl_retr_le g)

theorem functionSpace_retrIncl {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ∀ f, functionSpaceRetrFun P (functionSpaceInclFun P f) = f :=
  (FunctionSpace.projection P P).retr_incl

noncomputable def functionSpace {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ContinuousLatticeProjection (ScottMap D D) (ScottMap D' D') where
  incl := ⟨functionSpaceInclFun P, functionSpaceInclFun.outer_continuous P⟩
  retr := ⟨functionSpaceRetrFun P, functionSpaceRetrFun.outer_continuous P⟩
  retr_incl := functionSpace_retrIncl P
  incl_retr_le := functionSpace_inclRetrLe P

end ContinuousLatticeProjection

end DomainTheory.ContinuousLattice
```

0

functionSpaceProjection.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceInclFun
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceRetrFun
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

namespace ContinuousLatticeProjection

theorem functionSpace_inclRetrLe {D D' : Type u} [CompleteLattice D] [CompleteLattice
    D']
    (P : ContinuousLatticeProjection D D') :
    ∀ g, functionSpaceInclFun P (functionSpaceRetrFun P g) ≤ g := by
  intro g
  exact ScottMap.le_def.mpr ((FunctionSpace.projection P P).incl_retr_le g)

theorem functionSpace_retrIncl {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ∀ f, functionSpaceRetrFun P (functionSpaceInclFun P f) = f :=
  (FunctionSpace.projection P P).retr_incl

noncomputable def functionSpace {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ContinuousLatticeProjection (ScottMap D D) (ScottMap D' D') where
  incl := ⟨functionSpaceInclFun P, functionSpaceInclFun.outer_continuous P⟩
  retr := ⟨functionSpaceRetrFun P, functionSpaceRetrFun.outer_continuous P⟩
  retr_incl := functionSpace_retrIncl P
  incl_retr_le := functionSpace_inclRetrLe P

end ContinuousLatticeProjection

end DomainTheory.ContinuousLattice
```

1

functionSpaceProjection.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceInclFun
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceRetrFun
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

namespace ContinuousLatticeProjection

theorem functionSpace_inclRetrLe {D D' : Type u} [CompleteLattice D] [CompleteLattice
    D']
    (P : ContinuousLatticeProjection D D') :
    ∀ g, functionSpaceInclFun P (functionSpaceRetrFun P g) ≤ g := by
  intro g
  exact ScottMap.le_def.mpr ((FunctionSpace.projection P P).incl_retr_le g)

theorem functionSpace_retrIncl {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ∀ f, functionSpaceRetrFun P (functionSpaceInclFun P f) = f :=
  (FunctionSpace.projection P P).retr_incl

noncomputable def functionSpace {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ContinuousLatticeProjection (ScottMap D D) (ScottMap D' D') where
  incl := ⟨functionSpaceInclFun P, functionSpaceInclFun.outer_continuous P⟩
  retr := ⟨functionSpaceRetrFun P, functionSpaceRetrFun.outer_continuous P⟩
  retr_incl := functionSpace_retrIncl P
  incl_retr_le := functionSpace_inclRetrLe P

end ContinuousLatticeProjection

end DomainTheory.ContinuousLattice
```

2

functionSpaceProjection.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceInclFun
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceRetrFun
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

namespace ContinuousLatticeProjection

theorem functionSpace_inclRetrLe {D D' : Type u} [CompleteLattice D] [CompleteLattice
```

```
    D']
    (P : ContinuousLatticeProjection D D') :
    ∀ g, functionSpaceInclFun P (functionSpaceRetrFun P g) ≤ g := by
  intro g
  exact ScottMap.le_def.mpr ((FunctionSpace.projection P P).incl_retr_le g)

theorem functionSpace_retrIncl {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ∀ f, functionSpaceRetrFun P (functionSpaceInclFun P f) = f :=
  (FunctionSpace.projection P P).retr_incl

noncomputable def functionSpace {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ContinuousLatticeProjection (ScottMap D D) (ScottMap D' D') where
  incl := ⟨functionSpaceInclFun P, functionSpaceInclFun.outer_continuous P⟩
  retr := ⟨functionSpaceRetrFun P, functionSpaceRetrFun.outer_continuous P⟩
  retr_incl := functionSpace_retrIncl P
  incl_retr_le := functionSpace_inclRetrLe P

end ContinuousLatticeProjection

end DomainTheory.ContinuousLattice
```

3

functionSpaceProjection.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceInclFun
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceRetrFun
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

namespace ContinuousLatticeProjection

theorem functionSpace_inclRetrLe {D D' : Type u} [CompleteLattice D] [CompleteLattice
    D']
    (P : ContinuousLatticeProjection D D') :
    ∀ g, functionSpaceInclFun P (functionSpaceRetrFun P g) ≤ g := by
  intro g
  exact ScottMap.le_def.mpr ((FunctionSpace.projection P P).incl_retr_le g)

theorem functionSpace_retrIncl {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
```

```
    ∀ f, functionSpaceRetrFun P (functionSpaceInclFun P f) = f :=
  (FunctionSpace.projection P P).retr_incl

noncomputable def functionSpace {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ContinuousLatticeProjection (ScottMap D D) (ScottMap D' D') where
  incl := ⟨functionSpaceInclFun P, functionSpaceInclFun.outer_continuous P⟩
  retr := ⟨functionSpaceRetrFun P, functionSpaceRetrFun.outer_continuous P⟩
  retr_incl := functionSpace_retrIncl P
  incl_retr_le := functionSpace_inclRetrLe P

end ContinuousLatticeProjection

end DomainTheory.ContinuousLattice
```

4

functionSpaceProjection.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceInclFun
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceRetrFun
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

namespace ContinuousLatticeProjection

theorem functionSpace_inclRetrLe {D D' : Type u} [CompleteLattice D] [CompleteLattice
    D']
    (P : ContinuousLatticeProjection D D') :
    ∀ g, functionSpaceInclFun P (functionSpaceRetrFun P g) ≤ g := by
  intro g
  exact ScottMap.le_def.mpr ((FunctionSpace.projection P P).incl_retr_le g)

theorem functionSpace_retrIncl {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ∀ f, functionSpaceRetrFun P (functionSpaceInclFun P f) = f :=
  (FunctionSpace.projection P P).retr_incl

noncomputable def functionSpace {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ContinuousLatticeProjection (ScottMap D D) (ScottMap D' D') where
  incl := ⟨functionSpaceInclFun P, functionSpaceInclFun.outer_continuous P⟩
  retr := ⟨functionSpaceRetrFun P, functionSpaceRetrFun.outer_continuous P⟩
```

```
  retr_incl := functionSpace_retrIncl P
  incl_retr_le := functionSpace_inclRetrLe P

end ContinuousLatticeProjection

end DomainTheory.ContinuousLattice
```

5

functionSpaceProjection.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceInclFun
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceRetrFun
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

namespace ContinuousLatticeProjection

theorem functionSpace_inclRetrLe {D D' : Type u} [CompleteLattice D] [CompleteLattice
    D']
    (P : ContinuousLatticeProjection D D') :
    ∀ g, functionSpaceInclFun P (functionSpaceRetrFun P g) ≤ g := by
  intro g
  exact ScottMap.le_def.mpr ((FunctionSpace.projection P P).incl_retr_le g)

theorem functionSpace_retrIncl {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ∀ f, functionSpaceRetrFun P (functionSpaceInclFun P f) = f :=
  (FunctionSpace.projection P P).retr_incl

noncomputable def functionSpace {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ContinuousLatticeProjection (ScottMap D D) (ScottMap D' D') where
  incl := ⟨functionSpaceInclFun P, functionSpaceInclFun.outer_continuous P⟩
  retr := ⟨functionSpaceRetrFun P, functionSpaceRetrFun.outer_continuous P⟩
  retr_incl := functionSpace_retrIncl P
  incl_retr_le := functionSpace_inclRetrLe P

end ContinuousLatticeProjection

end DomainTheory.ContinuousLattice
```

6

functionSpaceProjection.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceInclFun
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceRetrFun
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

namespace ContinuousLatticeProjection

theorem functionSpace_inclRetrLe {D D' : Type u} [CompleteLattice D] [CompleteLattice
    D']
    (P : ContinuousLatticeProjection D D') :
    ∀ g, functionSpaceInclFun P (functionSpaceRetrFun P g) ≤ g := by
  intro g
  exact ScottMap.le_def.mpr ((FunctionSpace.projection P P).incl_retr_le g)

theorem functionSpace_retrIncl {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ∀ f, functionSpaceRetrFun P (functionSpaceInclFun P f) = f :=
  (FunctionSpace.projection P P).retr_incl

noncomputable def functionSpace {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ContinuousLatticeProjection (ScottMap D D) (ScottMap D' D') where
  incl := ⟨functionSpaceInclFun P, functionSpaceInclFun.outer_continuous P⟩
  retr := ⟨functionSpaceRetrFun P, functionSpaceRetrFun.outer_continuous P⟩
  retr_incl := functionSpace_retrIncl P
  incl_retr_le := functionSpace_inclRetrLe P

end ContinuousLatticeProjection

end DomainTheory.ContinuousLattice
```

7

functionSpaceProjection.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceInclFun
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceRetrFun
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
```

```
@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

namespace ContinuousLatticeProjection

theorem functionSpace_inclRetrLe {D D' : Type u} [CompleteLattice D] [CompleteLattice
    D']
    (P : ContinuousLatticeProjection D D') :
    ∀ g, functionSpaceInclFun P (functionSpaceRetrFun P g) ≤ g := by
  intro g
  exact ScottMap.le_def.mpr ((FunctionSpace.projection P P).incl_retr_le g)

theorem functionSpace_retrIncl {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ∀ f, functionSpaceRetrFun P (functionSpaceInclFun P f) = f :=
  (FunctionSpace.projection P P).retr_incl

noncomputable def functionSpace {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ContinuousLatticeProjection (ScottMap D D) (ScottMap D' D') where
  incl := ⟨functionSpaceInclFun P, functionSpaceInclFun.outer_continuous P⟩
  retr := ⟨functionSpaceRetrFun P, functionSpaceRetrFun.outer_continuous P⟩
  retr_incl := functionSpace_retrIncl P
  incl_retr_le := functionSpace_inclRetrLe P

end ContinuousLatticeProjection

end DomainTheory.ContinuousLattice
```

8

functionSpaceProjection.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceInclFun
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.functionSpaceRetrFun
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

namespace ContinuousLatticeProjection
```

```
theorem functionSpace_inclRetrLe {D D' : Type u} [CompleteLattice D] [CompleteLattice
    D']
    (P : ContinuousLatticeProjection D D') :
    ∀ g, functionSpaceInclFun P (functionSpaceRetrFun P g) ≤ g := by
  intro g
  exact ScottMap.le_def.mpr ((FunctionSpace.projection P P).incl_retr_le g)

theorem functionSpace_retrIncl {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ∀ f, functionSpaceRetrFun P (functionSpaceInclFun P f) = f :=
  (FunctionSpace.projection P P).retr_incl

noncomputable def functionSpace {D D' : Type u} [CompleteLattice D] [CompleteLattice D
    ']
    (P : ContinuousLatticeProjection D D') :
    ContinuousLatticeProjection (ScottMap D D) (ScottMap D' D') where
  incl := ⟨functionSpaceInclFun P, functionSpaceInclFun.outer_continuous P⟩
  retr := ⟨functionSpaceRetrFun P, functionSpaceRetrFun.outer_continuous P⟩
  retr_incl := functionSpace_retrIncl P
  incl_retr_le := functionSpace_inclRetrLe P

end ContinuousLatticeProjection

end DomainTheory.ContinuousLattice
```

9

functionSpaceInclFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceInclFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) :
    @Continuous D' D' scottTopologicalSpace scottTopologicalSpace
      (fun x => P.incl (f (P.retr x))) :=
  @Continuous.congr D' D' scottTopologicalSpace scottTopologicalSpace
    (P.incl.comp (f.comp P.retr)).1 (fun x => P.incl (f (P.retr x)))
    (P.incl.comp (f.comp P.retr)).continuous (fun _ => rfl)

end functionSpaceInclFun
```

```
def functionSpaceInclFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) : ScottMap D' D' :=
  ⟨fun x => P.incl (f (P.retr x)), functionSpaceInclFun.continuous P f⟩

namespace functionSpaceInclFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D D) (ScottMap D' D')
      scottTopologicalSpace scottTopologicalSpace (functionSpaceInclFun P) := by
  exact @Continuous.congr (ScottMap D D) (ScottMap D' D')
    scottTopologicalSpace scottTopologicalSpace (conjMap P.incl P.retr).1
    (functionSpaceInclFun P) (conjMap P.incl P.retr).continuous
    (fun f => ScottMap.ext fun _ => rfl)

end functionSpaceInclFun

end DomainTheory.ContinuousLattice
```

0

functionSpaceInclFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceInclFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) :
    @Continuous D' D' scottTopologicalSpace scottTopologicalSpace
      (fun x => P.incl (f (P.retr x))) :=
  @Continuous.congr D' D' scottTopologicalSpace scottTopologicalSpace
    (P.incl.comp (f.comp P.retr)).1 (fun x => P.incl (f (P.retr x)))
    (P.incl.comp (f.comp P.retr)).continuous (fun _ => rfl)

end functionSpaceInclFun

def functionSpaceInclFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) : ScottMap D' D' :=
  ⟨fun x => P.incl (f (P.retr x)), functionSpaceInclFun.continuous P f⟩

namespace functionSpaceInclFun
```

```
theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D D) (ScottMap D' D')
      scottTopologicalSpace scottTopologicalSpace (functionSpaceInclFun P) := by
  exact @Continuous.congr (ScottMap D D) (ScottMap D' D')
    scottTopologicalSpace scottTopologicalSpace (conjMap P.incl P.retr).1
    (functionSpaceInclFun P) (conjMap P.incl P.retr).continuous
    (fun f => ScottMap.ext fun _ => rfl)

end functionSpaceInclFun

end DomainTheory.ContinuousLattice
```

1

functionSpaceInclFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceInclFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) :
    @Continuous D' D' scottTopologicalSpace scottTopologicalSpace
      (fun x => P.incl (f (P.retr x))) :=
  @Continuous.congr D' D' scottTopologicalSpace scottTopologicalSpace
    (P.incl.comp (f.comp P.retr)).1 (fun x => P.incl (f (P.retr x)))
    (P.incl.comp (f.comp P.retr)).continuous (fun _ => rfl)

end functionSpaceInclFun

def functionSpaceInclFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) : ScottMap D' D' :=
  ⟨fun x => P.incl (f (P.retr x)), functionSpaceInclFun.continuous P f⟩

namespace functionSpaceInclFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D D) (ScottMap D' D')
      scottTopologicalSpace scottTopologicalSpace (functionSpaceInclFun P) := by
```

```
  exact @Continuous.congr (ScottMap D D) (ScottMap D' D')
    scottTopologicalSpace scottTopologicalSpace (conjMap P.incl P.retr).1
    (functionSpaceInclFun P) (conjMap P.incl P.retr).continuous
    (fun f => ScottMap.ext fun _ => rfl)

end functionSpaceInclFun

end DomainTheory.ContinuousLattice
```

2

functionSpaceInclFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceInclFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) :
    @Continuous D' D' scottTopologicalSpace scottTopologicalSpace
      (fun x => P.incl (f (P.retr x))) :=
  @Continuous.congr D' D' scottTopologicalSpace scottTopologicalSpace
    (P.incl.comp (f.comp P.retr)).1 (fun x => P.incl (f (P.retr x)))
    (P.incl.comp (f.comp P.retr)).continuous (fun _ => rfl)

end functionSpaceInclFun

def functionSpaceInclFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) : ScottMap D' D' :=
  ⟨fun x => P.incl (f (P.retr x)), functionSpaceInclFun.continuous P f⟩

namespace functionSpaceInclFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D D) (ScottMap D' D')
      scottTopologicalSpace scottTopologicalSpace (functionSpaceInclFun P) := by
  exact @Continuous.congr (ScottMap D D) (ScottMap D' D')
    scottTopologicalSpace scottTopologicalSpace (conjMap P.incl P.retr).1
    (functionSpaceInclFun P) (conjMap P.incl P.retr).continuous
    (fun f => ScottMap.ext fun _ => rfl)

end functionSpaceInclFun
```

```
end DomainTheory.ContinuousLattice
```

3

functionSpaceInclFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceInclFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) :
    @Continuous D' D' scottTopologicalSpace scottTopologicalSpace
      (fun x => P.incl (f (P.retr x))) :=
  @Continuous.congr D' D' scottTopologicalSpace scottTopologicalSpace
    (P.incl.comp (f.comp P.retr)).1 (fun x => P.incl (f (P.retr x)))
    (P.incl.comp (f.comp P.retr)).continuous (fun _ => rfl)

end functionSpaceInclFun

def functionSpaceInclFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) : ScottMap D' D' :=
  ⟨fun x => P.incl (f (P.retr x)), functionSpaceInclFun.continuous P f⟩

namespace functionSpaceInclFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D D) (ScottMap D' D')
      scottTopologicalSpace scottTopologicalSpace (functionSpaceInclFun P) := by
  exact @Continuous.congr (ScottMap D D) (ScottMap D' D')
    scottTopologicalSpace scottTopologicalSpace (conjMap P.incl P.retr).1
    (functionSpaceInclFun P) (conjMap P.incl P.retr).continuous
    (fun f => ScottMap.ext fun _ => rfl)

end functionSpaceInclFun

end DomainTheory.ContinuousLattice
```

4

functionSpaceInclFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceInclFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) :
    @Continuous D' D' scottTopologicalSpace scottTopologicalSpace
      (fun x => P.incl (f (P.retr x))) :=
  @Continuous.congr D' D' scottTopologicalSpace scottTopologicalSpace
    (P.incl.comp (f.comp P.retr)).1 (fun x => P.incl (f (P.retr x)))
    (P.incl.comp (f.comp P.retr)).continuous (fun _ => rfl)

end functionSpaceInclFun

def functionSpaceInclFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) : ScottMap D' D' :=
  ⟨fun x => P.incl (f (P.retr x)), functionSpaceInclFun.continuous P f⟩

namespace functionSpaceInclFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D D) (ScottMap D' D')
      scottTopologicalSpace scottTopologicalSpace (functionSpaceInclFun P) := by
  exact @Continuous.congr (ScottMap D D) (ScottMap D' D')
    scottTopologicalSpace scottTopologicalSpace (conjMap P.incl P.retr).1
    (functionSpaceInclFun P) (conjMap P.incl P.retr).continuous
    (fun f => ScottMap.ext fun _ => rfl)

end functionSpaceInclFun

end DomainTheory.ContinuousLattice
```

5

functionSpaceInclFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection
```

```
@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceInclFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) :
    @Continuous D' D' scottTopologicalSpace scottTopologicalSpace
      (fun x => P.incl (f (P.retr x))) :=
  @Continuous.congr D' D' scottTopologicalSpace scottTopologicalSpace
    (P.incl.comp (f.comp P.retr)).1 (fun x => P.incl (f (P.retr x)))
    (P.incl.comp (f.comp P.retr)).continuous (fun _ => rfl)

end functionSpaceInclFun

def functionSpaceInclFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) : ScottMap D' D' :=
  ⟨fun x => P.incl (f (P.retr x)), functionSpaceInclFun.continuous P f⟩

namespace functionSpaceInclFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D D) (ScottMap D' D')
      scottTopologicalSpace scottTopologicalSpace (functionSpaceInclFun P) := by
  exact @Continuous.congr (ScottMap D D) (ScottMap D' D')
    scottTopologicalSpace scottTopologicalSpace (conjMap P.incl P.retr).1
    (functionSpaceInclFun P) (conjMap P.incl P.retr).continuous
    (fun f => ScottMap.ext fun _ => rfl)

end functionSpaceInclFun

end DomainTheory.ContinuousLattice
```

6

functionSpaceInclFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str
```

```
namespace functionSpaceInclFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) :
    @Continuous D' D' scottTopologicalSpace scottTopologicalSpace
      (fun x => P.incl (f (P.retr x))) :=
  @Continuous.congr D' D' scottTopologicalSpace scottTopologicalSpace
    (P.incl.comp (f.comp P.retr)).1 (fun x => P.incl (f (P.retr x)))
    (P.incl.comp (f.comp P.retr)).continuous (fun _ => rfl)

end functionSpaceInclFun

def functionSpaceInclFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) : ScottMap D' D' :=
  ⟨fun x => P.incl (f (P.retr x)), functionSpaceInclFun.continuous P f⟩

namespace functionSpaceInclFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D D) (ScottMap D' D')
      scottTopologicalSpace scottTopologicalSpace (functionSpaceInclFun P) := by
  exact @Continuous.congr (ScottMap D D) (ScottMap D' D')
    scottTopologicalSpace scottTopologicalSpace (conjMap P.incl P.retr).1
    (functionSpaceInclFun P) (conjMap P.incl P.retr).continuous
    (fun f => ScottMap.ext fun _ => rfl)

end functionSpaceInclFun

end DomainTheory.ContinuousLattice
```

7

functionSpaceInclFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceInclFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) :
```

```
    @Continuous D' D' scottTopologicalSpace scottTopologicalSpace
      (fun x => P.incl (f (P.retr x))) :=
  @Continuous.congr D' D' scottTopologicalSpace scottTopologicalSpace
    (P.incl.comp (f.comp P.retr)).1 (fun x => P.incl (f (P.retr x)))
    (P.incl.comp (f.comp P.retr)).continuous (fun _ => rfl)

end functionSpaceInclFun

def functionSpaceInclFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) : ScottMap D' D' :=
  ⟨fun x => P.incl (f (P.retr x)), functionSpaceInclFun.continuous P f⟩

namespace functionSpaceInclFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D D) (ScottMap D' D')
      scottTopologicalSpace scottTopologicalSpace (functionSpaceInclFun P) := by
  exact @Continuous.congr (ScottMap D D) (ScottMap D' D')
    scottTopologicalSpace scottTopologicalSpace (conjMap P.incl P.retr).1
    (functionSpaceInclFun P) (conjMap P.incl P.retr).continuous
    (fun f => ScottMap.ext fun _ => rfl)

end functionSpaceInclFun

end DomainTheory.ContinuousLattice
```

8

functionSpaceInclFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceInclFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) :
    @Continuous D' D' scottTopologicalSpace scottTopologicalSpace
      (fun x => P.incl (f (P.retr x))) :=
  @Continuous.congr D' D' scottTopologicalSpace scottTopologicalSpace
    (P.incl.comp (f.comp P.retr)).1 (fun x => P.incl (f (P.retr x)))
    (P.incl.comp (f.comp P.retr)).continuous (fun _ => rfl)
```

```
end functionSpaceInclFun

def functionSpaceInclFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (f : ScottMap D D) : ScottMap D' D' :=
  ⟨fun x => P.incl (f (P.retr x)), functionSpaceInclFun.continuous P f⟩

namespace functionSpaceInclFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D D) (ScottMap D' D')
      scottTopologicalSpace scottTopologicalSpace (functionSpaceInclFun P) := by
  exact @Continuous.congr (ScottMap D D) (ScottMap D' D')
    scottTopologicalSpace scottTopologicalSpace (conjMap P.incl P.retr).1
    (functionSpaceInclFun P) (conjMap P.incl P.retr).continuous
    (fun f => ScottMap.ext fun _ => rfl)

end functionSpaceInclFun

end DomainTheory.ContinuousLattice
```

9

4.8.4 Factoid 8.4

A domain of domains. Not many details can be presented here, but we would also like to remark that even domains can be made into a domain. One way of getting an idea of how this is possible is to note that since subdomains of $\mathbf{U}$ correspond to certain kinds of functions on $\mathbf{U}$, and since the function space of $\mathbf{U}$ is also a subdomain of $\mathbf{U}$, it might be suspected that the subdomains of $\mathbf{U}$ form a single subdomain of $\mathbf{U}$.

That is a fairly sophisticated way of reaching the conclusion (and many details have to be worked out). A more elementary approach would be just to ask what it means to give a finite amount of information about a domain. For the sake of uniformity, suppose that the data objects of the possible domain are drawn from the non-negative integers, and that we conventionally use 0 for Δ. Then to give a finite amount of information about a domain is—roughly—to specify a finite part of Con and a finite part of $\vdash$. To make the formulation easier, we will reserve for 1 a rôle like the one recently played by ∇. What the specifications will boil down to is pairs (u, v) of finite sets of integers used as data objects to convey one piece of information about an entailment relation.

But hold, entailment relations are very closely connected to approximable mappings. Indeed, we remarked before that the identity function as an approximable mapping on a domain is just represented as the underlying entailment relation itself. Suppose we take as our domain the domain of all sets of integers. It is a powerset, so call it $\mathbf{P}$. That is to say, the integers are the data objects, all finite sets are consistent, and the entailment relation is the minimal possible one. (As far as elements go, an arbitrary set of integers is equal to the union of all its finite subsets, which means that the elements of the domain are in a one-one correspondence with the arbitrary sets of integers.) The question is: which approximable mappings on $\mathbf{P}$ into itself correspond to entailment relations on the integers as data objects?

The answer can be expressed most succinctly using our standard notation. If we think of $r : \mathbf{P} \to \mathbf{P}$ as a relation between finite sets in the usual way, then to say that r is reflexive is to say:

(1) $I_{\mathbf{P}} \subseteq r$.

To say that r is transitive is to say:

(2) $r \circ r = r$. To say that for r the object 0 plays at being Δ is to say:

$$(3) \quad \bar{0} \subseteq r(\bot),$$

where in general $\bar{n}$ is short for $\{n\}$ in the domain $\mathbf{P}$. Then, to say that 1 plays at being a rogue object is to say:

$$(4) \quad \top = r(\bar{1}).$$

Finally, to say that 1 is an inconsistent object that has to be excluded is to say:

$$(5) \quad \bar{1} \not\subseteq r(\bar{0}).$$

That's it. The collection of approximable mappings satisfying (1)–(5) gives us all the entailment relations we need. Condition (5) is a consistency condition, and for r the consistent finite sets u are those such that $\bar{1} \not\subseteq r(\bar{u})$. What we are asserting is that the totality of r satisfying (1)–(5) forms the elements of a domain—one that has been derived from $(\mathbf{P} \to \mathbf{P})$ in a way similar to the way we derived $\mathbf{U}$ from $\mathbf{V}$ above.

Having made domains into a domain, the next step is to see how constructs on domain (i.e. functors) can be made into approximable mappings. But the retelling and development of that story will have to wait for another publication along with the very interesting chapter on powerdomains. I only hope the ground covered here makes the theory of domains seem more elementary and more natural. ?

5 Bridge Theorems

Dana Scott developed three presentations of the same class of domains: **continuous lattices** (1972), **neighbourhood systems** (PRG-19 / 1980–81), and **information systems** (1982). In this chapter we supply **bridge theorems**: order isomorphisms and constructivity audits showing that the three presentations determine the same domains (up to isomorphism), including products, separated sums, and function spaces at the information-system level, with a transport of 1972 Scott maps along the round presentation.

The Lean development is sorry-free. The continuous-lattice identification `D ≃o RoundFilter` audits to `{propext, Quot.sound}`. Every InfoSys-facing declaration inherits `Classical.choice` from Mathlib 4.33's `Finset` instances, even when the proof term extracts no witness. Genuine classical frontiers remain Scott's 1972 topological definition of $\ll$ (algebraic $\Rightarrow$ continuous; ScottMap conjugation) and trichotomy for separated sums.

Dependencies. Each box is one folder. BridgeTheorems is the Lean files in that folder, not in a subfolder. The arrowhead points at the folder that imports, and the number is how many direct imports. A pair of arrows between the same boxes is a cycle.



Figure 55: Bridge Theorems.

5.1 Introduction

Neighbourhood systems and information systems are equivalent in a precise sense. The mathematical folklore is stronger still: all three presentations carve out the same class of domains, related by ideal completion and the Scott topology. That equivalence is already known; this article is the write-up of a machine-checked proof of the named bridges, not a first presentation of the result. The three presentations were formalized in separate libraries; the maps between them are the content of this package.

We do **not** re-prove Scott's internal theorems; we import the finished sibling packages and build cross-presentation maps:

Presentation	Lean package	Characteristic object
Continuous lattices [1]	`scott1972`	`ContinuousLattice D`, way-below $\ll$, `ScottMap`
Neighbourhood systems [2]	`scott1980`	`NeighborhoodSystem`, filters as domain elements
Information systems [3]	`scott1982`	`InfoSys`, elements as consistent closed token sets

The main subtlety is that a naïve reading of "domains = filters of neighbourhoods" overstates the continuous-lattice corner: for a continuous lattice `D`, the filter `{⇑a | a ≤ x}` has retract `x` but properly contains the principal round filter `{⇑a | a ≪ x}`. The correct identification is **`D ≃o RoundFilter`**, not raw $|\mathcal{D}|$.

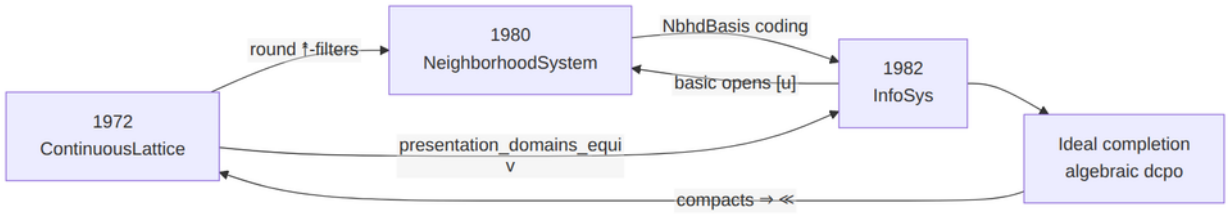

Figure 56: Introduction.

We prove **order isomorphisms of domains** (and of the named construction objects), not a 2-categorical equivalence of the full categories of continuous lattices / neighbourhood systems / information systems with all morphisms. Morphisms are linked where the sibling packages already supply them:

- approximable maps ↔ Scott-continuous maps on `|A|` (Factoid 4.6);
- Scott maps of continuous lattices ↔ their conjugates on the round presentation.

A full functorial equivalence (preserving products, exponentials, and inverse limits simultaneously across all three presentations) would require additional coherence theorems.

5.2 Catalog of bridge theorems

Theorem	Direction	Lean module	Scope
`continuousLattice_to_neighborhoodSystem`	1972 → 1980	`ContinuousLatticeToNeighborhood.lean`	library
`neighborhoodSystem_to_infoSys`	1980 → 1982	`NeighborhoodToInfoSys.lean`	compared
`infoSys_to_neighborhoodSystem`	1982 → 1980	`InfoSysToNeighborhood.lean`	compared
`infoSys_to_idealCompletion`	1982 → algebraic	`InfoSysToIdealCompletion.lean`	library
`idealCompletion_to_continuousLattice`	algebraic → 1972	`IdealCompletionToContinuousLattice.lean`	library
`presentation_domains_equiv`	three-way	`PresentationDomains.lean`	compared
`infoSys_constructions_equiv`	constructions	`InfoSysConstructions.lean`, `ScottMapBridge.lean`	library
`sexNeighborhoodIso` / `sexIdealIso` / `sexDomainEquationIso`	S-expression instance	`WorkedExampleSExpr.lean`, `SexDomainEquation.lean`	compared

The sibling packages are **finished dependencies**, not work items of this paper: `scott1972`, `scott1980`, and `scott1982` (information systems through Factoid 8.4 / domain equations). They are vendored in `vendor/` at frozen SHAs (see `vendor/FROZEN.txt` / `lakefile.toml`), with the local modifications recorded there and in `formalization.yaml`; the remotes remain the per-paper homes. The compared family (Palomar `Challenge.lean` / `comparator.json`) is the 1980 $\leftrightarrow$ 1982 coding, the round three-way identification, and the Factoid 8.1 instance; the other catalog rows are proved in `ScottModels/` but are not Comparator targets. This package was verified and registered in the Palomar registry as PALOMAR-2026-08-25-000003 v1 [4]. What Palomar verified is the claim:

> Order isomorphisms relating Scott's three presentations of domains — continuous lattices (1972), neighbourhood systems (PRG-19), and information systems (1982) — including the round identification `D ≃o RoundFilter ≃o RoundInfoSysElement` and the S-expression equation `T ≅ A + (T × T)` as `|T| ≃o |A + (T × T)|` (`SexSys.Element ≃o SexRhs.Element`).

This document (`view.pdf`) is the narrative account, not a formalization of the three papers. The module map below is left-to-right: sibling packages on the left, local `ScottModels/` modules on the right, with arrows for **direct** imports (transitive imports inside the siblings are omitted). `Equivalence` re-exports the bridges; only the `ScottMapBridge` $\rightarrow$ `Equivalence` edge is drawn to avoid clutter. Root `ScottModels.lean` also opens 1972 `ContinuousLattice.Specialization`, 1980 `Neighborhood.Basic`, and 1982 `InfoSys`.

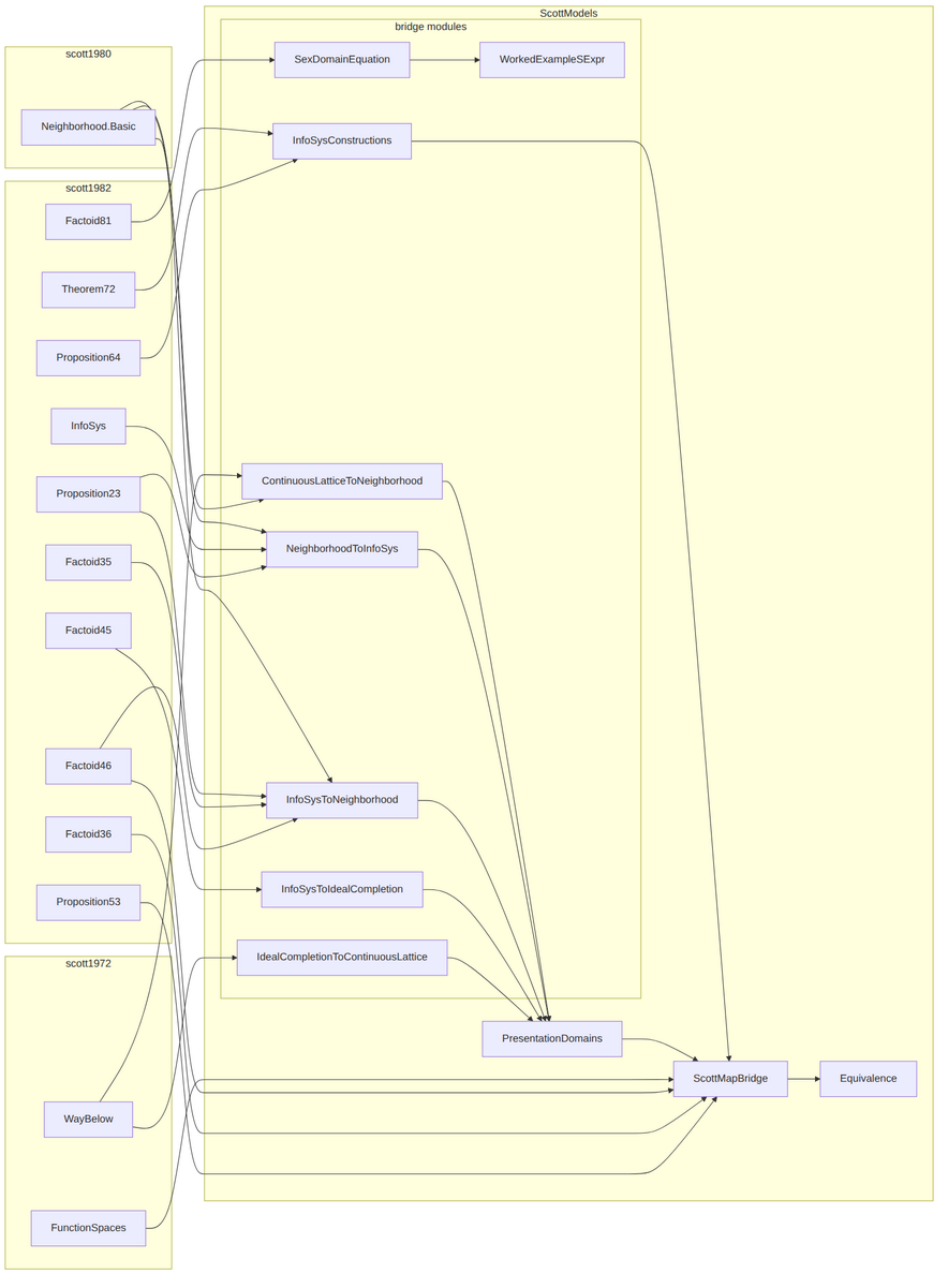

Figure 57: Lean module map.

5.3 Proof notes

5.3.1 Continuous lattices → neighbourhood systems

Claim. For a continuous lattice `D`, the sets `⇑a = {z | a ≪ z}` form a `NeighborhoodSystem` on token type `D`, and under `ContinuousLattice` one has an order isomorphism `D ≃o RoundFilter`.

Construction. `wayBelowUp a` is upward closed; `⇑⊥ = univ`; `⇑a ∩ ⇑b = ⇑(a ⊔ b)` (inter-

polation / directedness of way-below). Principal filters `toFilter x = {⇑a | a ≪ x}` are round: membership of ⇑a yields, by interpolation in a continuous lattice, some b with a ≪ b ≪ x, hence ⇑b ∈ toFilter x.

Why raw $|\mathcal{D}|$ fails. The larger filter {⇑a | a ≤ x} still has ofFilter = x (supremum of codes), but is not equal to toFilter x whenever there are elements way-below strictly below x. Roundness (⇑a ∈ f ⇒ ∃ b, a ≪ b ∧ ⇑b ∈ f) cuts exactly to the image of toFilter.

Axioms. `domainOrderIso : D ≃o RoundFilter` audits to {propext, Quot.sound}.

5.3.2 Neighbourhood systems → information systems

Claim. A neighbourhood system equipped with a decidable exhaustive coding `NbhdBasis ι α` of its neighbourhood family $\mathcal{D}$ induces an InfoSys on tokens ι with $|\mathcal{D}| \simeq_o$ the InfoSys domain.

Construction. Tokens are neighbourhood indices. Consistency of a finite u ⊆ ι is membership of $\bigcap_{i \in u}$ nbhd i in $\mathcal{D}$ (empty intersection = master set Δ). Entailment u ⊢ j means the intersection is a neighbourhood contained in nbhd j. Filters of the neighbourhood system correspond to InfoSys elements via the coding.

Constructivity. `DecidableEq ι` is required so InfoSys can use the choice-free Finset prelude from scott1982. The proof of ent_con avoids classical by_cases / em. The maps extract no witnesses; the kernel audit still reports inherited Classical.choice from the Mathlib 4.33 Finset instance frontier (§4).

5.3.3 Information systems → neighbourhood systems

Claim. For an information system A, the basic opens [u] = {x ∈ |A| | ↑u ⊆ x} (u ∈ Con) form a NeighborhoodSystem on |A|, and filters recover elements: |A| ≃o the filter domain.

Proof note. Scott's Factoid 4.6 supplies the basic-open vocabulary. The Lean proof initially pulled Classical.choice through simp on basicOpen_empty / finset unions; those simps were removed so the construction extracts no witnesses. The kernel audit still reports inherited Classical.choice through InfoSys/Finset (§4). Together with §3.2 this is the **1980 ↔ 1982** equivalence under coding.

5.3.4 Information systems → ideal completion

Claim. `|A| ≃o Ideal (FiniteElement A)`, where finite elements are closures $\bar{u}$ of consistent finsets (Factoid 3.5).

Construction. toIdeal x is the ideal of finite approximants of x; ofIdeal takes directed suprema of finite elements (1982 Factoids 4.4–4.5: directedSup, eq_directedSup_finiteApproximants, compact_closure). The maps extract no witnesses; the kernel audit inherits Classical.choice through InfoSys/Finset (§4).

5.3.5 Algebraic complete lattices → continuous lattices

Claim. If every element of a complete lattice is the directed supremum of compact elements below it (AlgebraicLattice), then ContinuousLattice holds.

Proof note. Order-theoretic compactness implies Set.Ici k is Scott-open, hence k ≪ y whenever k ≤ y. Algebraicity then yields y = ⊔{k compact | k ≤ y} ⊆ ⊔{x | x ≪ y}. This is the **classical frontier**: Scott's ≪ is defined topologically in scott1972, so the footprint inherits that classicality even though the order argument is elementary.

5.3.6 Three-presentation equivalence (`presentation_domains_equiv`)

Claim. Under `ContinuousLattice D` and `DecidableEq D`,

```
D ≃o RoundFilter ≃o RoundInfoSysElement
```

where `RoundInfoSysElement` is the subtype of elements of the InfoSys coded by `wayBelowNbhdBasis` (tokens = elements of `D`, neighbourhoods = $\Uparrow$`a`) that correspond to round filters. An extended form routes through the ideal-completion subtype.

Glue. `wayBelowNbhdBasis` packages the $\Uparrow$-system as an `NbhdBasis`; `roundFilter_infoSys_iso` transports roundness along `NbhdBasis.domainOrderIso`; `presentation_domains_equiv` is the composite with `continuousLattice_roundFilter_iso`.

What is not claimed. Raw `|`$\mathcal{D}$`|` and the full InfoSys domain `|A|` remain properly larger than `D`. The equivalence is on the **round** corner that matches continuous lattice points.

Axioms. Under Mathlib 4.33 the kernel audit includes `{propext, Classical.choice, Quot.sound}` through the inherited InfoSys/`Finset` instance frontier described in §4; the round-filter construction itself performs no choice-based witness extraction.

5.3.7 Constructions (`infoSys_constructions_equiv`)

Products `|A| × |B| ≃o |A × B|` via 1982 `pairElements` / `fstMap` / `sndMap` (Prop 6.2). The maps use explicit projections and assembly, with no witness selection.

Separated sums `WithBot (|A| ⊕ |B|) ≃o |A + B|` via `inl` / `inr` classify-and-assemble (Prop 6.4). Trichotomy on token polarity uses classical case-split (`Classical.choice` in the footprint).

Function spaces `ApproximableMap A B ≃o |A → B|` packages Theorem 7.2 (`approxMap_toElement` / `element_toApproxMap`) with pointwise `Le` as `PartialOrder`. No additional choice is used beyond the inherited InfoSys/`Finset` instance frontier.

Factoid 4.6 bridge `ApproximableMap A B ≃o ScottContinuous A B` via `toScottContinuous` / `ofScottContinuous`, using Prop 5.3(v) (`rel_iff_closure_le`) and `closure_le_element` for the round-trip on relations. The relation-level proof performs no witness extraction; its kernel audit inherits the InfoSys/`Finset` frontier in §4.

ScottMap conjugation A 1972 `ScottMap D E` conjugates along any pair of order isomorphisms ι`D : D ≃o D'`, ι`E : E ≃o E'` to a pointwise-ordered map `D' → E'`. Specializing to `continuousLattice_roundFilter_iso` / `presentation_domains_equiv` yields `scottMap_roundFilter_iso` and `scottMap_roundInfoSys_iso`. The conjugation itself is order-theoretic; the footprint includes `Classical.choice` because `ScottMap` is defined via Scott continuity in `scott1972`.

Out of scope (documented). Identifying `ApproximableMap` on the coded $\Uparrow$-InfoSys with `ScottMap D E` (needs roundness preservation of approximable maps), and relating `wayBelow (D × E)` to the InfoSys product of factors (cylinder basis).

`functionSpaceRetrFun.lean`

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
```

```
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceRetrFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') :
    @Continuous D D scottTopologicalSpace scottTopologicalSpace
      (fun x => P.retr (g (P.incl x))) :=
  @Continuous.congr D D scottTopologicalSpace scottTopologicalSpace
    (P.retr.comp (g.comp P.incl)).1 (fun x => P.retr (g (P.incl x)))
    (P.retr.comp (g.comp P.incl)).continuous (fun _ => rfl)

end functionSpaceRetrFun

def functionSpaceRetrFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') : ScottMap D D :=
  ⟨fun x => P.retr (g (P.incl x)), functionSpaceRetrFun.continuous P g⟩

namespace functionSpaceRetrFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D' D') (ScottMap D D)
      scottTopologicalSpace scottTopologicalSpace (functionSpaceRetrFun P) := by
  exact @Continuous.congr (ScottMap D' D') (ScottMap D D)
    scottTopologicalSpace scottTopologicalSpace (conjMap P.retr P.incl).1
    (functionSpaceRetrFun P) (conjMap P.retr P.incl).continuous
    (fun g => ScottMap.ext fun _ => rfl)

end functionSpaceRetrFun

end DomainTheory.ContinuousLattice
```

0

functionSpaceRetrFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice
```

```
universe u
attribute [instance] CLat.str

namespace functionSpaceRetrFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') :
    @Continuous D D scottTopologicalSpace scottTopologicalSpace
      (fun x => P.retr (g (P.incl x))) :=
  @Continuous.congr D D scottTopologicalSpace scottTopologicalSpace
    (P.retr.comp (g.comp P.incl)).1 (fun x => P.retr (g (P.incl x)))
    (P.retr.comp (g.comp P.incl)).continuous (fun _ => rfl)

end functionSpaceRetrFun

def functionSpaceRetrFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') : ScottMap D D :=
  ⟨fun x => P.retr (g (P.incl x)), functionSpaceRetrFun.continuous P g⟩

namespace functionSpaceRetrFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D' D') (ScottMap D D)
      scottTopologicalSpace scottTopologicalSpace (functionSpaceRetrFun P) := by
  exact @Continuous.congr (ScottMap D' D') (ScottMap D D)
    scottTopologicalSpace scottTopologicalSpace (conjMap P.retr P.incl).1
    (functionSpaceRetrFun P) (conjMap P.retr P.incl).continuous
    (fun g => ScottMap.ext fun _ => rfl)

end functionSpaceRetrFun

end DomainTheory.ContinuousLattice
```

1

functionSpaceRetrFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceRetrFun
```

```
theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') :
    @Continuous D D scottTopologicalSpace scottTopologicalSpace
      (fun x => P.retr (g (P.incl x))) :=
  @Continuous.congr D D scottTopologicalSpace scottTopologicalSpace
    (P.retr.comp (g.comp P.incl)).1 (fun x => P.retr (g (P.incl x)))
    (P.retr.comp (g.comp P.incl)).continuous (fun _ => rfl)

end functionSpaceRetrFun

def functionSpaceRetrFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') : ScottMap D D :=
  ⟨fun x => P.retr (g (P.incl x)), functionSpaceRetrFun.continuous P g⟩

namespace functionSpaceRetrFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D' D') (ScottMap D D)
      scottTopologicalSpace scottTopologicalSpace (functionSpaceRetrFun P) := by
  exact @Continuous.congr (ScottMap D' D') (ScottMap D D)
    scottTopologicalSpace scottTopologicalSpace (conjMap P.retr P.incl).1
    (functionSpaceRetrFun P) (conjMap P.retr P.incl).continuous
    (fun g => ScottMap.ext fun _ => rfl)

end functionSpaceRetrFun

end DomainTheory.ContinuousLattice
```

2

functionSpaceRetrFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceRetrFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') :
    @Continuous D D scottTopologicalSpace scottTopologicalSpace
      (fun x => P.retr (g (P.incl x))) :=
  @Continuous.congr D D scottTopologicalSpace scottTopologicalSpace
```

```
    (P.retr.comp (g.comp P.incl)).1 (fun x => P.retr (g (P.incl x)))
    (P.retr.comp (g.comp P.incl)).continuous (fun _ => rfl)

end functionSpaceRetrFun

def functionSpaceRetrFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') : ScottMap D D :=
  ⟨fun x => P.retr (g (P.incl x)), functionSpaceRetrFun.continuous P g⟩

namespace functionSpaceRetrFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D' D') (ScottMap D D)
      scottTopologicalSpace scottTopologicalSpace (functionSpaceRetrFun P) := by
  exact @Continuous.congr (ScottMap D' D') (ScottMap D D)
    scottTopologicalSpace scottTopologicalSpace (conjMap P.retr P.incl).1
    (functionSpaceRetrFun P) (conjMap P.retr P.incl).continuous
    (fun g => ScottMap.ext fun _ => rfl)

end functionSpaceRetrFun

end DomainTheory.ContinuousLattice
```

3

functionSpaceRetrFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceRetrFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') :
    @Continuous D D scottTopologicalSpace scottTopologicalSpace
      (fun x => P.retr (g (P.incl x))) :=
  @Continuous.congr D D scottTopologicalSpace scottTopologicalSpace
    (P.retr.comp (g.comp P.incl)).1 (fun x => P.retr (g (P.incl x)))
    (P.retr.comp (g.comp P.incl)).continuous (fun _ => rfl)

end functionSpaceRetrFun

def functionSpaceRetrFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
```

```
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') : ScottMap D D :=
  ⟨fun x => P.retr (g (P.incl x)), functionSpaceRetrFun.continuous P g⟩

namespace functionSpaceRetrFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D' D') (ScottMap D D)
      scottTopologicalSpace scottTopologicalSpace (functionSpaceRetrFun P) := by
  exact @Continuous.congr (ScottMap D' D') (ScottMap D D)
    scottTopologicalSpace scottTopologicalSpace (conjMap P.retr P.incl).1
    (functionSpaceRetrFun P) (conjMap P.retr P.incl).continuous
    (fun g => ScottMap.ext fun _ => rfl)

end functionSpaceRetrFun

end DomainTheory.ContinuousLattice
```

4

functionSpaceRetrFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceRetrFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') :
    @Continuous D D scottTopologicalSpace scottTopologicalSpace
      (fun x => P.retr (g (P.incl x))) :=
  @Continuous.congr D D scottTopologicalSpace scottTopologicalSpace
    (P.retr.comp (g.comp P.incl)).1 (fun x => P.retr (g (P.incl x)))
    (P.retr.comp (g.comp P.incl)).continuous (fun _ => rfl)

end functionSpaceRetrFun

def functionSpaceRetrFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') : ScottMap D D :=
  ⟨fun x => P.retr (g (P.incl x)), functionSpaceRetrFun.continuous P g⟩

namespace functionSpaceRetrFun

theorem outer_continuous {D D' : Type u}
```

```
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D' D') (ScottMap D D)
      scottTopologicalSpace scottTopologicalSpace (functionSpaceRetrFun P) := by
  exact @Continuous.congr (ScottMap D' D') (ScottMap D D)
    scottTopologicalSpace scottTopologicalSpace (conjMap P.retr P.incl).1
    (functionSpaceRetrFun P) (conjMap P.retr P.incl).continuous
    (fun g => ScottMap.ext fun _ => rfl)

end functionSpaceRetrFun

end DomainTheory.ContinuousLattice
```

5

functionSpaceRetrFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceRetrFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') :
    @Continuous D D scottTopologicalSpace scottTopologicalSpace
      (fun x => P.retr (g (P.incl x))) :=
  @Continuous.congr D D scottTopologicalSpace scottTopologicalSpace
    (P.retr.comp (g.comp P.incl)).1 (fun x => P.retr (g (P.incl x)))
    (P.retr.comp (g.comp P.incl)).continuous (fun _ => rfl)

end functionSpaceRetrFun

def functionSpaceRetrFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') : ScottMap D D :=
  ⟨fun x => P.retr (g (P.incl x)), functionSpaceRetrFun.continuous P g⟩

namespace functionSpaceRetrFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D' D') (ScottMap D D)
      scottTopologicalSpace scottTopologicalSpace (functionSpaceRetrFun P) := by
  exact @Continuous.congr (ScottMap D' D') (ScottMap D D)
    scottTopologicalSpace scottTopologicalSpace (conjMap P.retr P.incl).1
```

```
    (functionSpaceRetrFun P) (conjMap P.retr P.incl).continuous
    (fun g => ScottMap.ext fun _ => rfl)

end functionSpaceRetrFun

end DomainTheory.ContinuousLattice
```

6

functionSpaceRetrFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceRetrFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') :
    @Continuous D D scottTopologicalSpace scottTopologicalSpace
      (fun x => P.retr (g (P.incl x))) :=
  @Continuous.congr D D scottTopologicalSpace scottTopologicalSpace
    (P.retr.comp (g.comp P.incl)).1 (fun x => P.retr (g (P.incl x)))
    (P.retr.comp (g.comp P.incl)).continuous (fun _ => rfl)

end functionSpaceRetrFun

def functionSpaceRetrFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') : ScottMap D D :=
  ⟨fun x => P.retr (g (P.incl x)), functionSpaceRetrFun.continuous P g⟩

namespace functionSpaceRetrFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D' D') (ScottMap D D)
      scottTopologicalSpace scottTopologicalSpace (functionSpaceRetrFun P) := by
  exact @Continuous.congr (ScottMap D' D') (ScottMap D D)
    scottTopologicalSpace scottTopologicalSpace (conjMap P.retr P.incl).1
    (functionSpaceRetrFun P) (conjMap P.retr P.incl).continuous
    (fun g => ScottMap.ext fun _ => rfl)

end functionSpaceRetrFun

end DomainTheory.ContinuousLattice
```

7

functionSpaceRetrFun.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceRetrFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') :
    @Continuous D D scottTopologicalSpace scottTopologicalSpace
      (fun x => P.retr (g (P.incl x))) :=
  @Continuous.congr D D scottTopologicalSpace scottTopologicalSpace
    (P.retr.comp (g.comp P.incl)).1 (fun x => P.retr (g (P.incl x)))
    (P.retr.comp (g.comp P.incl)).continuous (fun _ => rfl)

end functionSpaceRetrFun

def functionSpaceRetrFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') : ScottMap D D :=
  ⟨fun x => P.retr (g (P.incl x)), functionSpaceRetrFun.continuous P g⟩

namespace functionSpaceRetrFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D' D') (ScottMap D D)
      scottTopologicalSpace scottTopologicalSpace (functionSpaceRetrFun P) := by
  exact @Continuous.congr (ScottMap D' D') (ScottMap D D)
    scottTopologicalSpace scottTopologicalSpace (conjMap P.retr P.incl).1
    (functionSpaceRetrFun P) (conjMap P.retr P.incl).continuous
    (fun g => ScottMap.ext fun _ => rfl)

end functionSpaceRetrFun

end DomainTheory.ContinuousLattice
```

8

functionSpaceRetrFun.lean

```
module
```

```
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.
    ContinuousLatticeProjection

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u
attribute [instance] CLat.str

namespace functionSpaceRetrFun

theorem continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') :
    @Continuous D D scottTopologicalSpace scottTopologicalSpace
      (fun x => P.retr (g (P.incl x))) :=
  @Continuous.congr D D scottTopologicalSpace scottTopologicalSpace
    (P.retr.comp (g.comp P.incl)).1 (fun x => P.retr (g (P.incl x)))
    (P.retr.comp (g.comp P.incl)).continuous (fun _ => rfl)

end functionSpaceRetrFun

def functionSpaceRetrFun {D D' : Type u} [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') (g : ScottMap D' D') : ScottMap D D :=
  ⟨fun x => P.retr (g (P.incl x)), functionSpaceRetrFun.continuous P g⟩

namespace functionSpaceRetrFun

theorem outer_continuous {D D' : Type u}
    [CompleteLattice D] [CompleteLattice D']
    (P : ContinuousLatticeProjection D D') :
    @Continuous (ScottMap D' D') (ScottMap D D)
      scottTopologicalSpace scottTopologicalSpace (functionSpaceRetrFun P) := by
  exact @Continuous.congr (ScottMap D' D') (ScottMap D D)
    scottTopologicalSpace scottTopologicalSpace (conjMap P.retr P.incl).1
    (functionSpaceRetrFun P) (conjMap P.retr P.incl).continuous
    (fun g => ScottMap.ext fun _ => rfl)

end functionSpaceRetrFun

end DomainTheory.ContinuousLattice
```

9

towerProj.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    functionSpaceProjection
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

noncomputable def towerProj (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) :
    ∀ n, ContinuousLatticeProjection (towerType D₀ n) (towerType D₀ (n + 1))
  | 0 => j₀
  | (n + 1) => ContinuousLatticeProjection.functionSpace (towerProj D₀ j₀ n)

namespace towerProj

theorem succ (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) (n :
    ℕ) :
    let P := towerProj D₀ j₀ n
    (towerProj D₀ j₀ (n + 1)).incl = conjMap P.incl P.retr ∧
      (towerProj D₀ j₀ (n + 1)).retr = conjMap P.retr P.incl := by
  exact ⟨rfl, rfl⟩

section Tower

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem succ_incl_apply (n : ℕ) (x : towerType D₀ (n + 1)) (y : towerType D₀ (n + 1)) :
    ((towerProj D₀ j₀ (n + 1)).incl x) y
      = (towerProj D₀ j₀ n).incl (x ((towerProj D₀ j₀ n).retr y)) := rfl

theorem succ_retr_apply (n : ℕ) (x' : towerType D₀ (n + 2)) (y : towerType D₀ n) :
    ((towerProj D₀ j₀ (n + 1)).retr x') y
      = (towerProj D₀ j₀ n).retr (x' ((towerProj D₀ j₀ n).incl y)) := rfl

theorem incl_apply (n : ℕ) (f : towerType D₀ (n + 1)) (x : towerType D₀ n) :
    (towerProj D₀ j₀ n).incl (f x)
      = ((towerProj D₀ j₀ (n + 1)).incl f) ((towerProj D₀ j₀ n).incl x) := by
  rw [succ_incl_apply, (towerProj D₀ j₀ n).retr_incl]

end Tower

end towerProj

end DomainTheory.ContinuousLattice
```

0

towerProj.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    functionSpaceProjection
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

noncomputable def towerProj (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) :
    ∀ n, ContinuousLatticeProjection (towerType D₀ n) (towerType D₀ (n + 1))
  | 0 => j₀
  | (n + 1) => ContinuousLatticeProjection.functionSpace (towerProj D₀ j₀ n)

namespace towerProj

theorem succ (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) (n :
    ℕ) :
    let P := towerProj D₀ j₀ n
    (towerProj D₀ j₀ (n + 1)).incl = conjMap P.incl P.retr ∧
      (towerProj D₀ j₀ (n + 1)).retr = conjMap P.retr P.incl := by
  exact ⟨rfl, rfl⟩

section Tower

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem succ_incl_apply (n : ℕ) (x : towerType D₀ (n + 1)) (y : towerType D₀ (n + 1)) :
    ((towerProj D₀ j₀ (n + 1)).incl x) y
      = (towerProj D₀ j₀ n).incl (x ((towerProj D₀ j₀ n).retr y)) := rfl

theorem succ_retr_apply (n : ℕ) (x' : towerType D₀ (n + 2)) (y : towerType D₀ n) :
    ((towerProj D₀ j₀ (n + 1)).retr x') y
      = (towerProj D₀ j₀ n).retr (x' ((towerProj D₀ j₀ n).incl y)) := rfl

theorem incl_apply (n : ℕ) (f : towerType D₀ (n + 1)) (x : towerType D₀ n) :
    (towerProj D₀ j₀ n).incl (f x)
      = ((towerProj D₀ j₀ (n + 1)).incl f) ((towerProj D₀ j₀ n).incl x) := by
  rw [succ_incl_apply, (towerProj D₀ j₀ n).retr_incl]

end Tower

end towerProj

end DomainTheory.ContinuousLattice
```

1

towerProj.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    functionSpaceProjection
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

noncomputable def towerProj (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) :
    ∀ n, ContinuousLatticeProjection (towerType D₀ n) (towerType D₀ (n + 1))
  | 0 => j₀
  | (n + 1) => ContinuousLatticeProjection.functionSpace (towerProj D₀ j₀ n)

namespace towerProj

theorem succ (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) (n :
    ℕ) :
    let P := towerProj D₀ j₀ n
    (towerProj D₀ j₀ (n + 1)).incl = conjMap P.incl P.retr ∧
      (towerProj D₀ j₀ (n + 1)).retr = conjMap P.retr P.incl := by
  exact ⟨rfl, rfl⟩

section Tower

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem succ_incl_apply (n : ℕ) (x : towerType D₀ (n + 1)) (y : towerType D₀ (n + 1)) :
    ((towerProj D₀ j₀ (n + 1)).incl x) y
      = (towerProj D₀ j₀ n).incl (x ((towerProj D₀ j₀ n).retr y)) := rfl

theorem succ_retr_apply (n : ℕ) (x' : towerType D₀ (n + 2)) (y : towerType D₀ n) :
    ((towerProj D₀ j₀ (n + 1)).retr x') y
      = (towerProj D₀ j₀ n).retr (x' ((towerProj D₀ j₀ n).incl y)) := rfl

theorem incl_apply (n : ℕ) (f : towerType D₀ (n + 1)) (x : towerType D₀ n) :
    (towerProj D₀ j₀ n).incl (f x)
      = ((towerProj D₀ j₀ (n + 1)).incl f) ((towerProj D₀ j₀ n).incl x) := by
  rw [succ_incl_apply, (towerProj D₀ j₀ n).retr_incl]

end Tower

end towerProj

end DomainTheory.ContinuousLattice
```

2

towerProj.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    functionSpaceProjection
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

noncomputable def towerProj (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) :
    ∀ n, ContinuousLatticeProjection (towerType D₀ n) (towerType D₀ (n + 1))
  | 0 => j₀
  | (n + 1) => ContinuousLatticeProjection.functionSpace (towerProj D₀ j₀ n)

namespace towerProj

theorem succ (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) (n :
    ℕ) :
    let P := towerProj D₀ j₀ n
    (towerProj D₀ j₀ (n + 1)).incl = conjMap P.incl P.retr ∧
      (towerProj D₀ j₀ (n + 1)).retr = conjMap P.retr P.incl := by
  exact ⟨rfl, rfl⟩

section Tower

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem succ_incl_apply (n : ℕ) (x : towerType D₀ (n + 1)) (y : towerType D₀ (n + 1)) :
    ((towerProj D₀ j₀ (n + 1)).incl x) y
      = (towerProj D₀ j₀ n).incl (x ((towerProj D₀ j₀ n).retr y)) := rfl

theorem succ_retr_apply (n : ℕ) (x' : towerType D₀ (n + 2)) (y : towerType D₀ n) :
    ((towerProj D₀ j₀ (n + 1)).retr x') y
      = (towerProj D₀ j₀ n).retr (x' ((towerProj D₀ j₀ n).incl y)) := rfl

theorem incl_apply (n : ℕ) (f : towerType D₀ (n + 1)) (x : towerType D₀ n) :
    (towerProj D₀ j₀ n).incl (f x)
      = ((towerProj D₀ j₀ (n + 1)).incl f) ((towerProj D₀ j₀ n).incl x) := by
  rw [succ_incl_apply, (towerProj D₀ j₀ n).retr_incl]

end Tower

end towerProj

end DomainTheory.ContinuousLattice
```

3

towerProj.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    functionSpaceProjection
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

noncomputable def towerProj (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) :
    ∀ n, ContinuousLatticeProjection (towerType D₀ n) (towerType D₀ (n + 1))
  | 0 => j₀
  | (n + 1) => ContinuousLatticeProjection.functionSpace (towerProj D₀ j₀ n)

namespace towerProj

theorem succ (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) (n :
    ℕ) :
    let P := towerProj D₀ j₀ n
    (towerProj D₀ j₀ (n + 1)).incl = conjMap P.incl P.retr ∧
      (towerProj D₀ j₀ (n + 1)).retr = conjMap P.retr P.incl := by
  exact ⟨rfl, rfl⟩

section Tower

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem succ_incl_apply (n : ℕ) (x : towerType D₀ (n + 1)) (y : towerType D₀ (n + 1)) :
    ((towerProj D₀ j₀ (n + 1)).incl x) y
      = (towerProj D₀ j₀ n).incl (x ((towerProj D₀ j₀ n).retr y)) := rfl

theorem succ_retr_apply (n : ℕ) (x' : towerType D₀ (n + 2)) (y : towerType D₀ n) :
    ((towerProj D₀ j₀ (n + 1)).retr x') y
      = (towerProj D₀ j₀ n).retr (x' ((towerProj D₀ j₀ n).incl y)) := rfl

theorem incl_apply (n : ℕ) (f : towerType D₀ (n + 1)) (x : towerType D₀ n) :
    (towerProj D₀ j₀ n).incl (f x)
      = ((towerProj D₀ j₀ (n + 1)).incl f) ((towerProj D₀ j₀ n).incl x) := by
  rw [succ_incl_apply, (towerProj D₀ j₀ n).retr_incl]

end Tower

end towerProj

end DomainTheory.ContinuousLattice
```

4

towerProj.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    functionSpaceProjection
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

noncomputable def towerProj (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) :
    ∀ n, ContinuousLatticeProjection (towerType D₀ n) (towerType D₀ (n + 1))
  | 0 => j₀
  | (n + 1) => ContinuousLatticeProjection.functionSpace (towerProj D₀ j₀ n)

namespace towerProj

theorem succ (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) (n :
    ℕ) :
    let P := towerProj D₀ j₀ n
    (towerProj D₀ j₀ (n + 1)).incl = conjMap P.incl P.retr ∧
      (towerProj D₀ j₀ (n + 1)).retr = conjMap P.retr P.incl := by
  exact ⟨rfl, rfl⟩

section Tower

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem succ_incl_apply (n : ℕ) (x : towerType D₀ (n + 1)) (y : towerType D₀ (n + 1)) :
    ((towerProj D₀ j₀ (n + 1)).incl x) y
      = (towerProj D₀ j₀ n).incl (x ((towerProj D₀ j₀ n).retr y)) := rfl

theorem succ_retr_apply (n : ℕ) (x' : towerType D₀ (n + 2)) (y : towerType D₀ n) :
    ((towerProj D₀ j₀ (n + 1)).retr x') y
      = (towerProj D₀ j₀ n).retr (x' ((towerProj D₀ j₀ n).incl y)) := rfl

theorem incl_apply (n : ℕ) (f : towerType D₀ (n + 1)) (x : towerType D₀ n) :
    (towerProj D₀ j₀ n).incl (f x)
      = ((towerProj D₀ j₀ (n + 1)).incl f) ((towerProj D₀ j₀ n).incl x) := by
  rw [succ_incl_apply, (towerProj D₀ j₀ n).retr_incl]

end Tower

end towerProj

end DomainTheory.ContinuousLattice
```

5

towerProj.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    functionSpaceProjection
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

noncomputable def towerProj (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) :
    ∀ n, ContinuousLatticeProjection (towerType D₀ n) (towerType D₀ (n + 1))
  | 0 => j₀
  | (n + 1) => ContinuousLatticeProjection.functionSpace (towerProj D₀ j₀ n)

namespace towerProj

theorem succ (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) (n :
    ℕ) :
    let P := towerProj D₀ j₀ n
    (towerProj D₀ j₀ (n + 1)).incl = conjMap P.incl P.retr ∧
      (towerProj D₀ j₀ (n + 1)).retr = conjMap P.retr P.incl := by
  exact ⟨rfl, rfl⟩

section Tower

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem succ_incl_apply (n : ℕ) (x : towerType D₀ (n + 1)) (y : towerType D₀ (n + 1)) :
    ((towerProj D₀ j₀ (n + 1)).incl x) y
      = (towerProj D₀ j₀ n).incl (x ((towerProj D₀ j₀ n).retr y)) := rfl

theorem succ_retr_apply (n : ℕ) (x' : towerType D₀ (n + 2)) (y : towerType D₀ n) :
    ((towerProj D₀ j₀ (n + 1)).retr x') y
      = (towerProj D₀ j₀ n).retr (x' ((towerProj D₀ j₀ n).incl y)) := rfl

theorem incl_apply (n : ℕ) (f : towerType D₀ (n + 1)) (x : towerType D₀ n) :
    (towerProj D₀ j₀ n).incl (f x)
      = ((towerProj D₀ j₀ (n + 1)).incl f) ((towerProj D₀ j₀ n).incl x) := by
  rw [succ_incl_apply, (towerProj D₀ j₀ n).retr_incl]

end Tower

end towerProj

end DomainTheory.ContinuousLattice
```

6

towerProj.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    functionSpaceProjection
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

noncomputable def towerProj (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) :
    ∀ n, ContinuousLatticeProjection (towerType D₀ n) (towerType D₀ (n + 1))
  | 0 => j₀
  | (n + 1) => ContinuousLatticeProjection.functionSpace (towerProj D₀ j₀ n)

namespace towerProj

theorem succ (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) (n :
    ℕ) :
    let P := towerProj D₀ j₀ n
    (towerProj D₀ j₀ (n + 1)).incl = conjMap P.incl P.retr ∧
      (towerProj D₀ j₀ (n + 1)).retr = conjMap P.retr P.incl := by
  exact ⟨rfl, rfl⟩

section Tower

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem succ_incl_apply (n : ℕ) (x : towerType D₀ (n + 1)) (y : towerType D₀ (n + 1)) :
    ((towerProj D₀ j₀ (n + 1)).incl x) y
      = (towerProj D₀ j₀ n).incl (x ((towerProj D₀ j₀ n).retr y)) := rfl

theorem succ_retr_apply (n : ℕ) (x' : towerType D₀ (n + 2)) (y : towerType D₀ n) :
    ((towerProj D₀ j₀ (n + 1)).retr x') y
      = (towerProj D₀ j₀ n).retr (x' ((towerProj D₀ j₀ n).incl y)) := rfl

theorem incl_apply (n : ℕ) (f : towerType D₀ (n + 1)) (x : towerType D₀ n) :
    (towerProj D₀ j₀ n).incl (f x)
      = ((towerProj D₀ j₀ (n + 1)).incl f) ((towerProj D₀ j₀ n).incl x) := by
  rw [succ_incl_apply, (towerProj D₀ j₀ n).retr_incl]

end Tower

end towerProj

end DomainTheory.ContinuousLattice
```

7

towerProj.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    functionSpaceProjection
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

noncomputable def towerProj (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) :
    ∀ n, ContinuousLatticeProjection (towerType D₀ n) (towerType D₀ (n + 1))
  | 0 => j₀
  | (n + 1) => ContinuousLatticeProjection.functionSpace (towerProj D₀ j₀ n)

namespace towerProj

theorem succ (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) (n :
    ℕ) :
    let P := towerProj D₀ j₀ n
    (towerProj D₀ j₀ (n + 1)).incl = conjMap P.incl P.retr ∧
      (towerProj D₀ j₀ (n + 1)).retr = conjMap P.retr P.incl := by
  exact ⟨rfl, rfl⟩

section Tower

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem succ_incl_apply (n : ℕ) (x : towerType D₀ (n + 1)) (y : towerType D₀ (n + 1)) :
    ((towerProj D₀ j₀ (n + 1)).incl x) y
      = (towerProj D₀ j₀ n).incl (x ((towerProj D₀ j₀ n).retr y)) := rfl

theorem succ_retr_apply (n : ℕ) (x' : towerType D₀ (n + 2)) (y : towerType D₀ n) :
    ((towerProj D₀ j₀ (n + 1)).retr x') y
      = (towerProj D₀ j₀ n).retr (x' ((towerProj D₀ j₀ n).incl y)) := rfl

theorem incl_apply (n : ℕ) (f : towerType D₀ (n + 1)) (x : towerType D₀ n) :
    (towerProj D₀ j₀ n).incl (f x)
      = ((towerProj D₀ j₀ (n + 1)).incl f) ((towerProj D₀ j₀ n).incl x) := by
  rw [succ_incl_apply, (towerProj D₀ j₀ n).retr_incl]

end Tower

end towerProj

end DomainTheory.ContinuousLattice
```

8

towerProj.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    functionSpaceProjection
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

noncomputable def towerProj (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) :
    ∀ n, ContinuousLatticeProjection (towerType D₀ n) (towerType D₀ (n + 1))
  | 0 => j₀
  | (n + 1) => ContinuousLatticeProjection.functionSpace (towerProj D₀ j₀ n)

namespace towerProj

theorem succ (D₀ : CLat.{u})
    (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier)) (n :
    ℕ) :
    let P := towerProj D₀ j₀ n
    (towerProj D₀ j₀ (n + 1)).incl = conjMap P.incl P.retr ∧
      (towerProj D₀ j₀ (n + 1)).retr = conjMap P.retr P.incl := by
  exact ⟨rfl, rfl⟩

section Tower

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem succ_incl_apply (n : ℕ) (x : towerType D₀ (n + 1)) (y : towerType D₀ (n + 1)) :
    ((towerProj D₀ j₀ (n + 1)).incl x) y
      = (towerProj D₀ j₀ n).incl (x ((towerProj D₀ j₀ n).retr y)) := rfl

theorem succ_retr_apply (n : ℕ) (x' : towerType D₀ (n + 2)) (y : towerType D₀ n) :
    ((towerProj D₀ j₀ (n + 1)).retr x') y
      = (towerProj D₀ j₀ n).retr (x' ((towerProj D₀ j₀ n).incl y)) := rfl

theorem incl_apply (n : ℕ) (f : towerType D₀ (n + 1)) (x : towerType D₀ n) :
    (towerProj D₀ j₀ n).incl (f x)
      = ((towerProj D₀ j₀ (n + 1)).incl f) ((towerProj D₀ j₀ n).incl x) := by
  rw [succ_incl_apply, (towerProj D₀ j₀ n).retr_incl]

end Tower

end towerProj

end DomainTheory.ContinuousLattice
```

9

DInf.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.InverseLimit
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.InverseLimits.instCompleteLattice

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

abbrev DInf : Type u := InverseLimit (towerType D₀) (towerProj D₀ j₀)

namespace DInf

abbrev fn : Type u := ScottMap (DInf D₀ j₀) (DInf D₀ j₀)

end DInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

0

DInf.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.InverseLimit
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.InverseLimits.instCompleteLattice

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

abbrev DInf : Type u := InverseLimit (towerType D₀) (towerProj D₀ j₀)

namespace DInf

abbrev fn : Type u := ScottMap (DInf D₀ j₀) (DInf D₀ j₀)

end DInf

end LimitMaps
```

```
end DomainTheory.ContinuousLattice
```

1

DInf.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.InverseLimit
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.InverseLimits.instCompleteLattice

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

abbrev DInf : Type u := InverseLimit (towerType D₀) (towerProj D₀ j₀)

namespace DInf

abbrev fn : Type u := ScottMap (DInf D₀ j₀) (DInf D₀ j₀)

end DInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

2

DInf.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.InverseLimit
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.InverseLimits.instCompleteLattice

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

section LimitMaps
```

```
variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

abbrev DInf : Type u := InverseLimit (towerType D₀) (towerProj D₀ j₀)

namespace DInf

abbrev fn : Type u := ScottMap (DInf D₀ j₀) (DInf D₀ j₀)

end DInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

3

DInf.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.InverseLimit
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.InverseLimits.instCompleteLattice

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

abbrev DInf : Type u := InverseLimit (towerType D₀) (towerProj D₀ j₀)

namespace DInf

abbrev fn : Type u := ScottMap (DInf D₀ j₀) (DInf D₀ j₀)

end DInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

4

DInf.lean

```
module
```

```
public import DomainTheory.ContinuousLattice.InverseLimits.InverseLimit
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.InverseLimits.instCompleteLattice

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

abbrev DInf : Type u := InverseLimit (towerType D₀) (towerProj D₀ j₀)

namespace DInf

abbrev fn : Type u := ScottMap (DInf D₀ j₀) (DInf D₀ j₀)

end DInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

5

DInf.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.InverseLimit
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.InverseLimits.instCompleteLattice

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

abbrev DInf : Type u := InverseLimit (towerType D₀) (towerProj D₀ j₀)

namespace DInf
```

```
abbrev fn : Type u := ScottMap (DInf D₀ j₀) (DInf D₀ j₀)

end DInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

6

DInf.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.InverseLimit
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.InverseLimits.instCompleteLattice

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

abbrev DInf : Type u := InverseLimit (towerType D₀) (towerProj D₀ j₀)

namespace DInf

abbrev fn : Type u := ScottMap (DInf D₀ j₀) (DInf D₀ j₀)

end DInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

7

DInf.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.InverseLimit
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.InverseLimits.instCompleteLattice

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

abbrev DInf : Type u := InverseLimit (towerType D₀) (towerProj D₀ j₀)

namespace DInf

abbrev fn : Type u := ScottMap (DInf D₀ j₀) (DInf D₀ j₀)

end DInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

8

DInf.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.InverseLimit
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.InverseLimits.instCompleteLattice

@[expose] public section

namespace DomainTheory.ContinuousLattice

universe u

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

abbrev DInf : Type u := InverseLimit (towerType D₀) (towerProj D₀ j₀)

namespace DInf

abbrev fn : Type u := ScottMap (DInf D₀ j₀) (DInf D₀ j₀)

end DInf

end LimitMaps
```

```
end DomainTheory.ContinuousLattice
```

9

iInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.DInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def iInfTerm (n : ℕ) : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (conjMap (embInf (towerType D₀) (towerProj D₀ j₀) n)
           (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)).comp
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))

namespace iInfTerm

@[simp] theorem apply (n : ℕ) (x z : DInf D₀ j₀) :
    (iInfTerm D₀ j₀ n x) z
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          ((x.1 (n + 1)) ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) z
    )) := rfl

end iInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

0

iInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.DInf

@[expose] public section

namespace DomainTheory.ContinuousLattice
```

```
attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def iInfTerm (n : ℕ) : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (conjMap (embInf (towerType D₀) (towerProj D₀ j₀) n)
           (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)).comp
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))

namespace iInfTerm

@[simp] theorem apply (n : ℕ) (x z : DInf D₀ j₀) :
    (iInfTerm D₀ j₀ n x) z
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          ((x.1 (n + 1)) ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) z
   )) := rfl

end iInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

1

iInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.DInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def iInfTerm (n : ℕ) : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (conjMap (embInf (towerType D₀) (towerProj D₀ j₀) n)
           (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)).comp
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))

namespace iInfTerm

@[simp] theorem apply (n : ℕ) (x z : DInf D₀ j₀) :
    (iInfTerm D₀ j₀ n x) z
```

```
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          ((x.1 (n + 1)) ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) z
    )) := rfl

end iInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

2

iInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.DInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def iInfTerm (n : ℕ) : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (conjMap (embInf (towerType D₀) (towerProj D₀ j₀) n)
           (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)).comp
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))

namespace iInfTerm

@[simp] theorem apply (n : ℕ) (x z : DInf D₀ j₀) :
    (iInfTerm D₀ j₀ n x) z
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          ((x.1 (n + 1)) ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) z
    )) := rfl

end iInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

3

iInfTerm.lean

```
module
```

```
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.DInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def iInfTerm (n : ℕ) : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (conjMap (embInf (towerType D₀) (towerProj D₀ j₀) n)
           (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)).comp
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))

namespace iInfTerm

@[simp] theorem apply (n : ℕ) (x z : DInf D₀ j₀) :
    (iInfTerm D₀ j₀ n x) z
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          ((x.1 (n + 1)) ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) z
   )) := rfl

end iInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

4

iInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.DInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def iInfTerm (n : ℕ) : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
```

```
  (conjMap (embInf (towerType D₀) (towerProj D₀ j₀) n)
           (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)).comp
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))

namespace iInfTerm

@[simp] theorem apply (n : ℕ) (x z : DInf D₀ j₀) :
    (iInfTerm D₀ j₀ n x) z
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          ((x.1 (n + 1)) ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) z
    )) := rfl

end iInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

5

iInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.DInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def iInfTerm (n : ℕ) : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (conjMap (embInf (towerType D₀) (towerProj D₀ j₀) n)
           (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)).comp
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))

namespace iInfTerm

@[simp] theorem apply (n : ℕ) (x z : DInf D₀ j₀) :
    (iInfTerm D₀ j₀ n x) z
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          ((x.1 (n + 1)) ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) z
    )) := rfl

end iInfTerm

end LimitMaps
```

```
end DomainTheory.ContinuousLattice
```

6

iInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.DInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def iInfTerm (n : ℕ) : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (conjMap (embInf (towerType D₀) (towerProj D₀ j₀) n)
           (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)).comp
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))

namespace iInfTerm

@[simp] theorem apply (n : ℕ) (x z : DInf D₀ j₀) :
    (iInfTerm D₀ j₀ n x) z
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          ((x.1 (n + 1)) ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) z
    )) := rfl

end iInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

7

iInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.DInf

@[expose] public section

namespace DomainTheory.ContinuousLattice
```

```
attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def iInfTerm (n : ℕ) : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (conjMap (embInf (towerType D₀) (towerProj D₀ j₀) n)
           (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)).comp
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))

namespace iInfTerm

@[simp] theorem apply (n : ℕ) (x z : DInf D₀ j₀) :
    (iInfTerm D₀ j₀ n x) z
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          ((x.1 (n + 1)) ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) z
   )) := rfl

end iInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

8

iInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.DInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def iInfTerm (n : ℕ) : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (conjMap (embInf (towerType D₀) (towerProj D₀ j₀) n)
           (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)).comp
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))

namespace iInfTerm

@[simp] theorem apply (n : ℕ) (x z : DInf D₀ j₀) :
    (iInfTerm D₀ j₀ n x) z
```

```
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          ((x.1 (n + 1)) ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) z
    )) := rfl

end iInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

9

embInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def embInfInf : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  ⋃ n, iInfTerm D₀ j₀ n

namespace embInfInf

theorem apply (x : DInf D₀ j₀) :
    embInfInf D₀ j₀ x = ⋃ n, iInfTerm D₀ j₀ n x := by
  show (sSup (Set.range (iInfTerm D₀ j₀)) : ScottMap _ _) x = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (embInfInf D₀ j₀ : DInf D₀ j₀ → DInf.fn D₀ j₀) :=
  (proposition_2_5 _).mp (embInfInf D₀ j₀).continuous

end embInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

0

embInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def embInfInf : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  ⋃ n, iInfTerm D₀ j₀ n

namespace embInfInf

theorem apply (x : DInf D₀ j₀) :
    embInfInf D₀ j₀ x = ⋃ n, iInfTerm D₀ j₀ n x := by
  show (sSup (Set.range (iInfTerm D₀ j₀)) : ScottMap _ _) x = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (embInfInf D₀ j₀ : DInf D₀ j₀ → DInf.fn D₀ j₀) :=
  (proposition_2_5 _).mp (embInfInf D₀ j₀).continuous

end embInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

1

embInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str
```

```
section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def embInfInf : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  ⋃ n, iInfTerm D₀ j₀ n

namespace embInfInf

theorem apply (x : DInf D₀ j₀) :
    embInfInf D₀ j₀ x = ⋃ n, iInfTerm D₀ j₀ n x := by
  show (sSup (Set.range (iInfTerm D₀ j₀)) : ScottMap _ _) x = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (embInfInf D₀ j₀ : DInf D₀ j₀ → DInf.fn D₀ j₀) :=
  (proposition_2_5 _).mp (embInfInf D₀ j₀).continuous

end embInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

2

embInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def embInfInf : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  ⋃ n, iInfTerm D₀ j₀ n

namespace embInfInf

theorem apply (x : DInf D₀ j₀) :
    embInfInf D₀ j₀ x = ⋃ n, iInfTerm D₀ j₀ n x := by
  show (sSup (Set.range (iInfTerm D₀ j₀)) : ScottMap _ _) x = _
```

```
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (embInfInf D₀ j₀ : DInf D₀ j₀ → DInf.fn D₀ j₀) :=
  (proposition_2_5 _).mp (embInfInf D₀ j₀).continuous

end embInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

3

embInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def embInfInf : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  ⋃ n, iInfTerm D₀ j₀ n

namespace embInfInf

theorem apply (x : DInf D₀ j₀) :
    embInfInf D₀ j₀ x = ⋃ n, iInfTerm D₀ j₀ n x := by
  show (sSup (Set.range (iInfTerm D₀ j₀)) : ScottMap _ _) x = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (embInfInf D₀ j₀ : DInf D₀ j₀ → DInf.fn D₀ j₀) :=
  (proposition_2_5 _).mp (embInfInf D₀ j₀).continuous

end embInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

4

embInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def embInfInf : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  ⋃ n, iInfTerm D₀ j₀ n

namespace embInfInf

theorem apply (x : DInf D₀ j₀) :
    embInfInf D₀ j₀ x = ⋃ n, iInfTerm D₀ j₀ n x := by
  show (sSup (Set.range (iInfTerm D₀ j₀)) : ScottMap _ _) x = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (embInfInf D₀ j₀ : DInf D₀ j₀ → DInf.fn D₀ j₀) :=
  (proposition_2_5 _).mp (embInfInf D₀ j₀).continuous

end embInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

5

embInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def embInfInf : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  ⋃ n, iInfTerm D₀ j₀ n

namespace embInfInf

theorem apply (x : DInf D₀ j₀) :
    embInfInf D₀ j₀ x = ⋃ n, iInfTerm D₀ j₀ n x := by
  show (sSup (Set.range (iInfTerm D₀ j₀)) : ScottMap _ _) x = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (embInfInf D₀ j₀ : DInf D₀ j₀ → DInf.fn D₀ j₀) :=
  (proposition_2_5 _).mp (embInfInf D₀ j₀).continuous

end embInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

6

embInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def embInfInf : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  ⋃ n, iInfTerm D₀ j₀ n

namespace embInfInf
```

```
theorem apply (x : DInf D₀ j₀) :
    embInfInf D₀ j₀ x = ⋃ n, iInfTerm D₀ j₀ n x := by
  show (sSup (Set.range (iInfTerm D₀ j₀)) : ScottMap _ _) x = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (embInfInf D₀ j₀ : DInf D₀ j₀ → DInf.fn D₀ j₀) :=
  (proposition_2_5 _).mp (embInfInf D₀ j₀).continuous

end embInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

7

embInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def embInfInf : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  ⋃ n, iInfTerm D₀ j₀ n

namespace embInfInf

theorem apply (x : DInf D₀ j₀) :
    embInfInf D₀ j₀ x = ⋃ n, iInfTerm D₀ j₀ n x := by
  show (sSup (Set.range (iInfTerm D₀ j₀)) : ScottMap _ _) x = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (embInfInf D₀ j₀ : DInf D₀ j₀ → DInf.fn D₀ j₀) :=
  (proposition_2_5 _).mp (embInfInf D₀ j₀).continuous

end embInfInf
```

```
end LimitMaps

end DomainTheory.ContinuousLattice
```

8

embInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def embInfInf : ScottMap (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  ⋃ n, iInfTerm D₀ j₀ n

namespace embInfInf

theorem apply (x : DInf D₀ j₀) :
    embInfInf D₀ j₀ x = ⋃ n, iInfTerm D₀ j₀ n x := by
  show (sSup (Set.range (iInfTerm D₀ j₀)) : ScottMap _ _) x = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (embInfInf D₀ j₀ : DInf D₀ j₀ → DInf.fn D₀ j₀) :=
  (proposition_2_5 _).mp (embInfInf D₀ j₀).continuous

end embInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

9

jInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def jInfTerm (n : ℕ) : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).comp
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n))

namespace jInfTerm

@[simp] theorem apply (n : ℕ) (f : DInf.fn D₀ j₀) :
    jInfTerm D₀ j₀ n f
      = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                   (embInf (towerType D₀) (towerProj D₀ j₀) n) f) := rfl

end jInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

0

jInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def jInfTerm (n : ℕ) : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).comp
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n))

namespace jInfTerm

@[simp] theorem apply (n : ℕ) (f : DInf.fn D₀ j₀) :
```

```
    jInfTerm D₀ j₀ n f
      = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                   (embInf (towerType D₀) (towerProj D₀ j₀) n) f) := rfl

end jInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

1

jInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def jInfTerm (n : ℕ) : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).comp
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n))

namespace jInfTerm

@[simp] theorem apply (n : ℕ) (f : DInf.fn D₀ j₀) :
    jInfTerm D₀ j₀ n f
      = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                   (embInf (towerType D₀) (towerProj D₀ j₀) n) f) := rfl

end jInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

2

jInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm
```

```
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def jInfTerm (n : ℕ) : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).comp
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n))

namespace jInfTerm

@[simp] theorem apply (n : ℕ) (f : DInf.fn D₀ j₀) :
    jInfTerm D₀ j₀ n f
      = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                   (embInf (towerType D₀) (towerProj D₀ j₀) n) f) := rfl

end jInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

3

jInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def jInfTerm (n : ℕ) : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).comp
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n))

namespace jInfTerm
```

```
@[simp] theorem apply (n : ℕ) (f : DInf.fn D₀ j₀) :
    jInfTerm D₀ j₀ n f
      = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                   (embInf (towerType D₀) (towerProj D₀ j₀) n) f) := rfl

end jInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

4

jInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def jInfTerm (n : ℕ) : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).comp
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n))

namespace jInfTerm

@[simp] theorem apply (n : ℕ) (f : DInf.fn D₀ j₀) :
    jInfTerm D₀ j₀ n f
      = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                   (embInf (towerType D₀) (towerProj D₀ j₀) n) f) := rfl

end jInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

5

jInfTerm.lean

```
module
```

```
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def jInfTerm (n : ℕ) : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).comp
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n))

namespace jInfTerm

@[simp] theorem apply (n : ℕ) (f : DInf.fn D₀ j₀) :
    jInfTerm D₀ j₀ n f
      = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                   (embInf (towerType D₀) (towerProj D₀ j₀) n) f) := rfl

end jInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

6

jInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def jInfTerm (n : ℕ) : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).comp
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n))
```

```
namespace jInfTerm

@[simp] theorem apply (n : ℕ) (f : DInf.fn D₀ j₀) :
    jInfTerm D₀ j₀ n f
      = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                   (embInf (towerType D₀) (towerProj D₀ j₀) n) f) := rfl

end jInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

7

jInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def jInfTerm (n : ℕ) : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).comp
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n))

namespace jInfTerm

@[simp] theorem apply (n : ℕ) (f : DInf.fn D₀ j₀) :
    jInfTerm D₀ j₀ n f
      = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                   (embInf (towerType D₀) (towerProj D₀ j₀) n) f) := rfl

end jInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

8

jInfTerm.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def jInfTerm (n : ℕ) : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).comp
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n))

namespace jInfTerm

@[simp] theorem apply (n : ℕ) (f : DInf.fn D₀ j₀) :
    jInfTerm D₀ j₀ n f
      = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                   (embInf (towerType D₀) (towerProj D₀ j₀) n) f) := rfl

end jInfTerm

end LimitMaps

end DomainTheory.ContinuousLattice
```

9

incl_projInf_le_projInf_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
```

```
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem incl_projInf_le_projInf_succ (n : ℕ) (w : DInf D₀ j₀) :
    (towerProj D₀ j₀ n).incl (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
    w)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w := by
  have h := (towerProj D₀ j₀ n).incl_retr_le
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w)
  rwa [show (towerProj D₀ j₀ n).retr (limitProjectionToLevel (towerType D₀) (towerProj
    D₀ j₀) (n + 1) w)
      = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w from w.2 n] at h

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

0

incl_projInf_le_projInf_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem incl_projInf_le_projInf_succ (n : ℕ) (w : DInf D₀ j₀) :
    (towerProj D₀ j₀ n).incl (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
    w)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w := by
  have h := (towerProj D₀ j₀ n).incl_retr_le
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w)
  rwa [show (towerProj D₀ j₀ n).retr (limitProjectionToLevel (towerType D₀) (towerProj
    D₀ j₀) (n + 1) w)
      = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w from w.2 n] at h

end Thm44b

end LimitMaps
```

```
end DomainTheory.ContinuousLattice
```

1

incl_projInf_le_projInf_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem incl_projInf_le_projInf_succ (n : ℕ) (w : DInf D₀ j₀) :
    (towerProj D₀ j₀ n).incl (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
    w)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w := by
  have h := (towerProj D₀ j₀ n).incl_retr_le
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w)
  rwa [show (towerProj D₀ j₀ n).retr (limitProjectionToLevel (towerType D₀) (towerProj
    D₀ j₀) (n + 1) w)
      = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w from w.2 n] at h

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

2

incl_projInf_le_projInf_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str
```

```
section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem incl_projInf_le_projInf_succ (n : ℕ) (w : DInf D₀ j₀) :
    (towerProj D₀ j₀ n).incl (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
    w)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w := by
  have h := (towerProj D₀ j₀ n).incl_retr_le
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w)
  rwa [show (towerProj D₀ j₀ n).retr (limitProjectionToLevel (towerType D₀) (towerProj
    D₀ j₀) (n + 1) w)
      = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w from w.2 n] at h

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

3

incl_projInf_le_projInf_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem incl_projInf_le_projInf_succ (n : ℕ) (w : DInf D₀ j₀) :
    (towerProj D₀ j₀ n).incl (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
    w)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w := by
  have h := (towerProj D₀ j₀ n).incl_retr_le
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w)
```

```
  rwa [show (towerProj D₀ j₀ n).retr (limitProjectionToLevel (towerType D₀) (towerProj
    D₀ j₀) (n + 1) w)
      = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w from w.2 n] at h

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

4

incl_projInf_le_projInf_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem incl_projInf_le_projInf_succ (n : ℕ) (w : DInf D₀ j₀) :
    (towerProj D₀ j₀ n).incl (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
    w)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w := by
  have h := (towerProj D₀ j₀ n).incl_retr_le
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w)
  rwa [show (towerProj D₀ j₀ n).retr (limitProjectionToLevel (towerType D₀) (towerProj
    D₀ j₀) (n + 1) w)
      = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w from w.2 n] at h

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

5

incl_projInf_le_projInf_succ.lean

```
module
```

```
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem incl_projInf_le_projInf_succ (n : ℕ) (w : DInf D₀ j₀) :
    (towerProj D₀ j₀ n).incl (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
    w)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w := by
  have h := (towerProj D₀ j₀ n).incl_retr_le
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w)
  rwa [show (towerProj D₀ j₀ n).retr (limitProjectionToLevel (towerType D₀) (towerProj
    D₀ j₀) (n + 1) w)
      = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w from w.2 n] at h

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

6

incl_projInf_le_projInf_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
```

```
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem incl_projInf_le_projInf_succ (n : ℕ) (w : DInf D₀ j₀) :
    (towerProj D₀ j₀ n).incl (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
    w)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w := by
  have h := (towerProj D₀ j₀ n).incl_retr_le
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w)
  rwa [show (towerProj D₀ j₀ n).retr (limitProjectionToLevel (towerType D₀) (towerProj
    D₀ j₀) (n + 1) w)
      = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w from w.2 n] at h

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

7

incl_projInf_le_projInf_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem incl_projInf_le_projInf_succ (n : ℕ) (w : DInf D₀ j₀) :
    (towerProj D₀ j₀ n).incl (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
    w)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w := by
  have h := (towerProj D₀ j₀ n).incl_retr_le
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w)
  rwa [show (towerProj D₀ j₀ n).retr (limitProjectionToLevel (towerType D₀) (towerProj
    D₀ j₀) (n + 1) w)
      = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w from w.2 n] at h

end Thm44b

end LimitMaps
```

```
end DomainTheory.ContinuousLattice
```

8

incl_projInf_le_projInf_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem incl_projInf_le_projInf_succ (n : ℕ) (w : DInf D₀ j₀) :
    (towerProj D₀ j₀ n).incl (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
    w)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w := by
  have h := (towerProj D₀ j₀ n).incl_retr_le
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) w)
  rwa [show (towerProj D₀ j₀ n).retr (limitProjectionToLevel (towerType D₀) (towerProj
    D₀ j₀) (n + 1) w)
      = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w from w.2 n] at h

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

9

iInfTerm_monotone.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iInfTerm_le_succ (x : DInf D₀ j₀) (m : ℕ) :
    iInfTerm D₀ j₀ m x ≤ iInfTerm D₀ j₀ (m + 1) x := by
  rw [ScottMap.le_def]
  intro z
  rw [iInfTerm.apply, iInfTerm.apply,
    ← embInf.succ (towerType D₀) (towerProj D₀ j₀) m
      (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))]
  refine embInf.monotone (towerType D₀) (towerProj D₀ j₀) (m + 1) ?_
  have hab : (towerProj D₀ j₀ m).incl (limitProjectionToLevel (towerType D₀) (towerProj
     D₀ j₀) m z)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z :=
    incl_projInf_le_projInf_succ D₀ j₀ m z
  calc (towerProj D₀ j₀ m).incl
          (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))
      = (towerProj D₀ j₀ m).incl
          (((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2)))
            (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) := by
        rw [show ((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2))) = x.1 (m + 1) from x.2
    (m + 1)]
    _ = (towerProj D₀ j₀ m).incl
          ((towerProj D₀ j₀ m).retr
            (x.1 (m + 2) ((towerProj D₀ j₀ m).incl
              (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)))) := by
        rw [towerProj.succ_retr_apply]
    _ ≤ x.1 (m + 2) ((towerProj D₀ j₀ m).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) :=
        (towerProj D₀ j₀ m).incl_retr_le _
    _ ≤ x.1 (m + 2) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z)
     :=
        ScottMap.monotone (x.1 (m + 2)) hab

theorem iInfTerm_monotone (x : DInf D₀ j₀) : Monotone (fun m => iInfTerm D₀ j₀ m x) :=
  monotone_nat_of_le_succ (iInfTerm_le_succ D₀ j₀ x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

0

iInfTerm_monotone.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iInfTerm_le_succ (x : DInf D₀ j₀) (m : ℕ) :
    iInfTerm D₀ j₀ m x ≤ iInfTerm D₀ j₀ (m + 1) x := by
  rw [ScottMap.le_def]
  intro z
  rw [iInfTerm.apply, iInfTerm.apply,
    ← embInf.succ (towerType D₀) (towerProj D₀ j₀) m
      (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))]
  refine embInf.monotone (towerType D₀) (towerProj D₀ j₀) (m + 1) ?_
  have hab : (towerProj D₀ j₀ m).incl (limitProjectionToLevel (towerType D₀) (towerProj
     D₀ j₀) m z)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z :=
    incl_projInf_le_projInf_succ D₀ j₀ m z
  calc (towerProj D₀ j₀ m).incl
          (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))
      = (towerProj D₀ j₀ m).incl
          (((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2)))
            (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) := by
        rw [show ((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2))) = x.1 (m + 1) from x.2
    (m + 1)]
    _ = (towerProj D₀ j₀ m).incl
          ((towerProj D₀ j₀ m).retr
            (x.1 (m + 2) ((towerProj D₀ j₀ m).incl
              (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)))) := by
        rw [towerProj.succ_retr_apply]
    _ ≤ x.1 (m + 2) ((towerProj D₀ j₀ m).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) :=
        (towerProj D₀ j₀ m).incl_retr_le _
    _ ≤ x.1 (m + 2) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z)
     :=
        ScottMap.monotone (x.1 (m + 2)) hab
```

```
theorem iInfTerm_monotone (x : DInf D₀ j₀) : Monotone (fun m => iInfTerm D₀ j₀ m x) :=
  monotone_nat_of_le_succ (iInfTerm_le_succ D₀ j₀ x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

1

iInfTerm_monotone.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iInfTerm_le_succ (x : DInf D₀ j₀) (m : ℕ) :
    iInfTerm D₀ j₀ m x ≤ iInfTerm D₀ j₀ (m + 1) x := by
  rw [ScottMap.le_def]
  intro z
  rw [iInfTerm.apply, iInfTerm.apply,
    ← embInf.succ (towerType D₀) (towerProj D₀ j₀) m
      (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))]
  refine embInf.monotone (towerType D₀) (towerProj D₀ j₀) (m + 1) ?_
  have hab : (towerProj D₀ j₀ m).incl (limitProjectionToLevel (towerType D₀) (towerProj
     D₀ j₀) m z)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z :=
    incl_projInf_le_projInf_succ D₀ j₀ m z
  calc (towerProj D₀ j₀ m).incl
          (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))
      = (towerProj D₀ j₀ m).incl
          (((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2)))
            (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) := by
        rw [show ((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2))) = x.1 (m + 1) from x.2
```

```
    (m + 1)]
    _ = (towerProj D₀ j₀ m).incl
          ((towerProj D₀ j₀ m).retr
            (x.1 (m + 2) ((towerProj D₀ j₀ m).incl
              (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)))) := by
        rw [towerProj.succ_retr_apply]
    _ ≤ x.1 (m + 2) ((towerProj D₀ j₀ m).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) :=
        (towerProj D₀ j₀ m).incl_retr_le _
    _ ≤ x.1 (m + 2) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z)
     :=
        ScottMap.monotone (x.1 (m + 2)) hab

theorem iInfTerm_monotone (x : DInf D₀ j₀) : Monotone (fun m => iInfTerm D₀ j₀ m x) :=
  monotone_nat_of_le_succ (iInfTerm_le_succ D₀ j₀ x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

2

iInfTerm_monotone.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iInfTerm_le_succ (x : DInf D₀ j₀) (m : ℕ) :
    iInfTerm D₀ j₀ m x ≤ iInfTerm D₀ j₀ (m + 1) x := by
  rw [ScottMap.le_def]
  intro z
  rw [iInfTerm.apply, iInfTerm.apply,
    ← embInf.succ (towerType D₀) (towerProj D₀ j₀) m
```

```
      (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))]
  refine embInf.monotone (towerType D₀) (towerProj D₀ j₀) (m + 1) ?_
  have hab : (towerProj D₀ j₀ m).incl (limitProjectionToLevel (towerType D₀) (towerProj
     D₀ j₀) m z)
       ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z :=
    incl_projInf_le_projInf_succ D₀ j₀ m z
  calc (towerProj D₀ j₀ m).incl
          (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))
      = (towerProj D₀ j₀ m).incl
          (((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2)))
            (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) := by
        rw [show ((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2))) = x.1 (m + 1) from x.2
    (m + 1)]
    _ = (towerProj D₀ j₀ m).incl
          ((towerProj D₀ j₀ m).retr
            (x.1 (m + 2) ((towerProj D₀ j₀ m).incl
              (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)))) := by
        rw [towerProj.succ_retr_apply]
    _ ≤ x.1 (m + 2) ((towerProj D₀ j₀ m).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) :=
        (towerProj D₀ j₀ m).incl_retr_le _
    _ ≤ x.1 (m + 2) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z)
     :=
        ScottMap.monotone (x.1 (m + 2)) hab

theorem iInfTerm_monotone (x : DInf D₀ j₀) : Monotone (fun m => iInfTerm D₀ j₀ m x) :=
  monotone_nat_of_le_succ (iInfTerm_le_succ D₀ j₀ x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

3

iInfTerm_monotone.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))
```

```
section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iInfTerm_le_succ (x : DInf D₀ j₀) (m : ℕ) :
    iInfTerm D₀ j₀ m x ≤ iInfTerm D₀ j₀ (m + 1) x := by
  rw [ScottMap.le_def]
  intro z
  rw [iInfTerm.apply, iInfTerm.apply,
    ← embInf.succ (towerType D₀) (towerProj D₀ j₀) m
      (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))]
  refine embInf.monotone (towerType D₀) (towerProj D₀ j₀) (m + 1) ?_
  have hab : (towerProj D₀ j₀ m).incl (limitProjectionToLevel (towerType D₀) (towerProj
     D₀ j₀) m z)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z :=
    incl_projInf_le_projInf_succ D₀ j₀ m z
  calc (towerProj D₀ j₀ m).incl
          (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))
      = (towerProj D₀ j₀ m).incl
          (((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2)))
            (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) := by
        rw [show ((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2))) = x.1 (m + 1) from x.2
    (m + 1)]
    _ = (towerProj D₀ j₀ m).incl
          ((towerProj D₀ j₀ m).retr
            (x.1 (m + 2) ((towerProj D₀ j₀ m).incl
              (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)))) := by
        rw [towerProj.succ_retr_apply]
    _ ≤ x.1 (m + 2) ((towerProj D₀ j₀ m).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) :=
        (towerProj D₀ j₀ m).incl_retr_le _
    _ ≤ x.1 (m + 2) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z)
     :=
        ScottMap.monotone (x.1 (m + 2)) hab

theorem iInfTerm_monotone (x : DInf D₀ j₀) : Monotone (fun m => iInfTerm D₀ j₀ m x) :=
  monotone_nat_of_le_succ (iInfTerm_le_succ D₀ j₀ x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

4

iInfTerm_monotone.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
```

```
public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iInfTerm_le_succ (x : DInf D₀ j₀) (m : ℕ) :
    iInfTerm D₀ j₀ m x ≤ iInfTerm D₀ j₀ (m + 1) x := by
  rw [ScottMap.le_def]
  intro z
  rw [iInfTerm.apply, iInfTerm.apply,
    ← embInf.succ (towerType D₀) (towerProj D₀ j₀) m
      (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))]
  refine embInf.monotone (towerType D₀) (towerProj D₀ j₀) (m + 1) ?_
  have hab : (towerProj D₀ j₀ m).incl (limitProjectionToLevel (towerType D₀) (towerProj
     D₀ j₀) m z)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z :=
    incl_projInf_le_projInf_succ D₀ j₀ m z
  calc (towerProj D₀ j₀ m).incl
          (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))
      = (towerProj D₀ j₀ m).incl
          (((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2)))
            (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) := by
        rw [show ((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2))) = x.1 (m + 1) from x.2
    (m + 1)]
    _ = (towerProj D₀ j₀ m).incl
          ((towerProj D₀ j₀ m).retr
            (x.1 (m + 2) ((towerProj D₀ j₀ m).incl
              (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)))) := by
        rw [towerProj.succ_retr_apply]
    _ ≤ x.1 (m + 2) ((towerProj D₀ j₀ m).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) :=
        (towerProj D₀ j₀ m).incl_retr_le _
    _ ≤ x.1 (m + 2) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z)
     :=
        ScottMap.monotone (x.1 (m + 2)) hab

theorem iInfTerm_monotone (x : DInf D₀ j₀) : Monotone (fun m => iInfTerm D₀ j₀ m x) :=
  monotone_nat_of_le_succ (iInfTerm_le_succ D₀ j₀ x)

end Thm44b

end LimitMaps
```

```
end DomainTheory.ContinuousLattice
```

5

iInfTerm_monotone.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iInfTerm_le_succ (x : DInf D₀ j₀) (m : ℕ) :
    iInfTerm D₀ j₀ m x ≤ iInfTerm D₀ j₀ (m + 1) x := by
  rw [ScottMap.le_def]
  intro z
  rw [iInfTerm.apply, iInfTerm.apply,
    ← embInf.succ (towerType D₀) (towerProj D₀ j₀) m
      (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))]
  refine embInf.monotone (towerType D₀) (towerProj D₀ j₀) (m + 1) ?_
  have hab : (towerProj D₀ j₀ m).incl (limitProjectionToLevel (towerType D₀) (towerProj
     D₀ j₀) m z)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z :=
    incl_projInf_le_projInf_succ D₀ j₀ m z
  calc (towerProj D₀ j₀ m).incl
          (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))
      = (towerProj D₀ j₀ m).incl
          (((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2)))
            (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) := by
        rw [show ((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2))) = x.1 (m + 1) from x.2
    (m + 1)]
    _ = (towerProj D₀ j₀ m).incl
          ((towerProj D₀ j₀ m).retr
            (x.1 (m + 2) ((towerProj D₀ j₀ m).incl
              (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)))) := by
        rw [towerProj.succ_retr_apply]
    _ ≤ x.1 (m + 2) ((towerProj D₀ j₀ m).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) :=
```

```
        (towerProj D₀ j₀ m).incl_retr_le _
    _ ≤ x.1 (m + 2) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z)
     :=
        ScottMap.monotone (x.1 (m + 2)) hab

theorem iInfTerm_monotone (x : DInf D₀ j₀) : Monotone (fun m => iInfTerm D₀ j₀ m x) :=
  monotone_nat_of_le_succ (iInfTerm_le_succ D₀ j₀ x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

6

iInfTerm_monotone.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iInfTerm_le_succ (x : DInf D₀ j₀) (m : ℕ) :
    iInfTerm D₀ j₀ m x ≤ iInfTerm D₀ j₀ (m + 1) x := by
  rw [ScottMap.le_def]
  intro z
  rw [iInfTerm.apply, iInfTerm.apply,
    ← embInf.succ (towerType D₀) (towerProj D₀ j₀) m
      (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))]
  refine embInf.monotone (towerType D₀) (towerProj D₀ j₀) (m + 1) ?_
  have hab : (towerProj D₀ j₀ m).incl (limitProjectionToLevel (towerType D₀) (towerProj
     D₀ j₀) m z)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z :=
    incl_projInf_le_projInf_succ D₀ j₀ m z
  calc (towerProj D₀ j₀ m).incl
          (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))
```

```
      = (towerProj D₀ j₀ m).incl
          (((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2)))
            (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) := by
        rw [show ((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2))) = x.1 (m + 1) from x.2
    (m + 1)]
    _ = (towerProj D₀ j₀ m).incl
          ((towerProj D₀ j₀ m).retr
            (x.1 (m + 2) ((towerProj D₀ j₀ m).incl
              (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)))) := by
        rw [towerProj.succ_retr_apply]
    _ ≤ x.1 (m + 2) ((towerProj D₀ j₀ m).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) :=
        (towerProj D₀ j₀ m).incl_retr_le _
    _ ≤ x.1 (m + 2) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z)
     :=
        ScottMap.monotone (x.1 (m + 2)) hab

theorem iInfTerm_monotone (x : DInf D₀ j₀) : Monotone (fun m => iInfTerm D₀ j₀ m x) :=
  monotone_nat_of_le_succ (iInfTerm_le_succ D₀ j₀ x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

7

iInfTerm_monotone.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iInfTerm_le_succ (x : DInf D₀ j₀) (m : ℕ) :
    iInfTerm D₀ j₀ m x ≤ iInfTerm D₀ j₀ (m + 1) x := by
```

```
  rw [ScottMap.le_def]
  intro z
  rw [iInfTerm.apply, iInfTerm.apply,
    ← embInf.succ (towerType D₀) (towerProj D₀ j₀) m
      (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))]
  refine embInf.monotone (towerType D₀) (towerProj D₀ j₀) (m + 1) ?_
  have hab : (towerProj D₀ j₀ m).incl (limitProjectionToLevel (towerType D₀) (towerProj
     D₀ j₀) m z)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z :=
    incl_projInf_le_projInf_succ D₀ j₀ m z
  calc (towerProj D₀ j₀ m).incl
          (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))
      = (towerProj D₀ j₀ m).incl
          (((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2)))
            (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) := by
        rw [show ((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2))) = x.1 (m + 1) from x.2
    (m + 1)]
    _ = (towerProj D₀ j₀ m).incl
          ((towerProj D₀ j₀ m).retr
            (x.1 (m + 2) ((towerProj D₀ j₀ m).incl
              (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)))) := by
        rw [towerProj.succ_retr_apply]
    _ ≤ x.1 (m + 2) ((towerProj D₀ j₀ m).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) :=
        (towerProj D₀ j₀ m).incl_retr_le _
    _ ≤ x.1 (m + 2) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z)
     :=
        ScottMap.monotone (x.1 (m + 2)) hab

theorem iInfTerm_monotone (x : DInf D₀ j₀) : Monotone (fun m => iInfTerm D₀ j₀ m x) :=
  monotone_nat_of_le_succ (iInfTerm_le_succ D₀ j₀ x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

8

iInfTerm_monotone.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.towerProj
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str
```

```
section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iInfTerm_le_succ (x : DInf D₀ j₀) (m : ℕ) :
    iInfTerm D₀ j₀ m x ≤ iInfTerm D₀ j₀ (m + 1) x := by
  rw [ScottMap.le_def]
  intro z
  rw [iInfTerm.apply, iInfTerm.apply,
    ← embInf.succ (towerType D₀) (towerProj D₀ j₀) m
      (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))]
  refine embInf.monotone (towerType D₀) (towerProj D₀ j₀) (m + 1) ?_
  have hab : (towerProj D₀ j₀ m).incl (limitProjectionToLevel (towerType D₀) (towerProj
     D₀ j₀) m z)
      ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z :=
    incl_projInf_le_projInf_succ D₀ j₀ m z
  calc (towerProj D₀ j₀ m).incl
          (x.1 (m + 1) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z))
      = (towerProj D₀ j₀ m).incl
          (((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2)))
            (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) := by
        rw [show ((towerProj D₀ j₀ (m + 1)).retr (x.1 (m + 2))) = x.1 (m + 1) from x.2
    (m + 1)]
    _ = (towerProj D₀ j₀ m).incl
          ((towerProj D₀ j₀ m).retr
            (x.1 (m + 2) ((towerProj D₀ j₀ m).incl
              (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)))) := by
        rw [towerProj.succ_retr_apply]
    _ ≤ x.1 (m + 2) ((towerProj D₀ j₀ m).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m z)) :=
        (towerProj D₀ j₀ m).incl_retr_le _
    _ ≤ x.1 (m + 2) (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (m + 1) z)
     :=
        ScottMap.monotone (x.1 (m + 2)) hab

theorem iInfTerm_monotone (x : DInf D₀ j₀) : Monotone (fun m => iInfTerm D₀ j₀ m x) :=
  monotone_nat_of_le_succ (iInfTerm_le_succ D₀ j₀ x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

9

embInf_succ_iSup.lean

```
module
```

```
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInf_succ_iSup (n : ℕ) (f : ℕ → towerType D₀ (n + 1)) (hf : Monotone f) :
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (⋃ m, f m) =
      ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).preservesDirectedSup_coe
      (Set.range f) hne hdir, ← Set.range_comp]
  rfl

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

0

embInf_succ_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps
```

```
variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInf_succ_iSup (n : ℕ) (f : ℕ → towerType D₀ (n + 1)) (hf : Monotone f) :
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (⋃ m, f m) =
      ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).preservesDirectedSup_coe
      (Set.range f) hne hdir, ← Set.range_comp]
  rfl

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

1

embInf_succ_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInf_succ_iSup (n : ℕ) (f : ℕ → towerType D₀ (n + 1)) (hf : Monotone f) :
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (⋃ m, f m) =
      ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
```

```
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).preservesDirectedSup_coe
      (Set.range f) hne hdir, ← Set.range_comp]
  rfl

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

2

embInf_succ_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInf_succ_iSup (n : ℕ) (f : ℕ → towerType D₀ (n + 1)) (hf : Monotone f) :
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (⋃ m, f m) =
      ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).preservesDirectedSup_coe
      (Set.range f) hne hdir, ← Set.range_comp]
  rfl

end Thm44b

end LimitMaps
```

```
end DomainTheory.ContinuousLattice
```

3

embInf_succ_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInf_succ_iSup (n : ℕ) (f : ℕ → towerType D₀ (n + 1)) (hf : Monotone f) :
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (⋃ m, f m) =
      ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).preservesDirectedSup_coe
      (Set.range f) hne hdir, ← Set.range_comp]
  rfl

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

4

embInf_succ_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
```

```
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInf_succ_iSup (n : ℕ) (f : ℕ → towerType D₀ (n + 1)) (hf : Monotone f) :
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (⋃ m, f m) =
      ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).preservesDirectedSup_coe
      (Set.range f) hne hdir, ← Set.range_comp]
  rfl

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

5

embInf_succ_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b
```

```
variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInf_succ_iSup (n : ℕ) (f : ℕ → towerType D₀ (n + 1)) (hf : Monotone f) :
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (⋃ m, f m) =
      ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).preservesDirectedSup_coe
      (Set.range f) hne hdir, ← Set.range_comp]
  rfl

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

6

embInf_succ_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInf_succ_iSup (n : ℕ) (f : ℕ → towerType D₀ (n + 1)) (hf : Monotone f) :
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (⋃ m, f m) =
      ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
```

```
    (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).preservesDirectedSup_coe
      (Set.range f) hne hdir, ← Set.range_comp]
  rfl

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

7

embInf_succ_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInf_succ_iSup (n : ℕ) (f : ℕ → towerType D₀ (n + 1)) (hf : Monotone f) :
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (⋃ m, f m) =
      ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).preservesDirectedSup_coe
      (Set.range f) hne hdir, ← Set.range_comp]
  rfl

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

8

embInf_succ_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInf_succ_iSup (n : ℕ) (f : ℕ → towerType D₀ (n + 1)) (hf : Monotone f) :
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (⋃ m, f m) =
      ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).preservesDirectedSup_coe
      (Set.range f) hne hdir, ← Set.range_comp]
  rfl

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

9

iSup2_monotone_eq_diagonal.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str
```

```
section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iSup₂_monotone_eq_diagonal {α : Type*} [CompleteLattice α] (f : ℕ → ℕ → α)
    (hfm : ∀ n, Monotone (f n)) (hfn : ∀ m, Monotone (fun n => f n m)) :
    ⋃ n, ⋃ m, f n m = ⋃ n, f n n := by
  apply le_antisymm
  · refine iSup_le fun n => iSup_le fun m => ?_
    have hk : n ≤ n ⊔ m := le_sup_left
    have hk' : m ≤ n ⊔ m := le_sup_right
    calc f n m ≤ f (n ⊔ m) m := hfn m hk
      _ ≤ f (n ⊔ m) (n ⊔ m) := hfm (n ⊔ m) hk'
      _ ≤ ⋃ n', f n' n' := le_iSup (fun n' => f n' n') (n ⊔ m)
  · refine iSup_le fun n => le_trans (le_iSup (f n) n) (le_iSup (fun n' => ⋃ m, f n' m)
    n)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

0

iSup2_monotone_eq_diagonal.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iSup₂_monotone_eq_diagonal {α : Type*} [CompleteLattice α] (f : ℕ → ℕ → α)
    (hfm : ∀ n, Monotone (f n)) (hfn : ∀ m, Monotone (fun n => f n m)) :
    ⋃ n, ⋃ m, f n m = ⋃ n, f n n := by
```

```
  apply le_antisymm
  · refine iSup_le fun n => iSup_le fun m => ?_
    have hk : n ≤ n ⊔ m := le_sup_left
    have hk' : m ≤ n ⊔ m := le_sup_right
    calc f n m ≤ f (n ⊔ m) m := hfn m hk
      _ ≤ f (n ⊔ m) (n ⊔ m) := hfm (n ⊔ m) hk'
      _ ≤ ⨆ n', f n' n' := le_iSup (fun n' => f n' n') (n ⊔ m)
  · refine iSup_le fun n => le_trans (le_iSup (f n) n) (le_iSup (fun n' => ⨆ m, f n' m)
     n)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

1

iSup2_monotone_eq_diagonal.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iSup₂_monotone_eq_diagonal {α : Type*} [CompleteLattice α] (f : ℕ → ℕ → α)
    (hfm : ∀ n, Monotone (f n)) (hfn : ∀ m, Monotone (fun n => f n m)) :
    ⨆ n, ⨆ m, f n m = ⨆ n, f n n := by
  apply le_antisymm
  · refine iSup_le fun n => iSup_le fun m => ?_
    have hk : n ≤ n ⊔ m := le_sup_left
    have hk' : m ≤ n ⊔ m := le_sup_right
    calc f n m ≤ f (n ⊔ m) m := hfn m hk
      _ ≤ f (n ⊔ m) (n ⊔ m) := hfm (n ⊔ m) hk'
      _ ≤ ⨆ n', f n' n' := le_iSup (fun n' => f n' n') (n ⊔ m)
  · refine iSup_le fun n => le_trans (le_iSup (f n) n) (le_iSup (fun n' => ⨆ m, f n' m)
     n)

end Thm44b

end LimitMaps
```

```
end DomainTheory.ContinuousLattice
```

2

iSup2_monotone_eq_diagonal.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iSup₂_monotone_eq_diagonal {α : Type*} [CompleteLattice α] (f : ℕ → ℕ → α)
    (hfm : ∀ n, Monotone (f n)) (hfn : ∀ m, Monotone (fun n => f n m)) :
    ⨆ n, ⨆ m, f n m = ⨆ n, f n n := by
  apply le_antisymm
  · refine iSup_le fun n => iSup_le fun m => ?_
    have hk : n ≤ n ⊔ m := le_sup_left
    have hk' : m ≤ n ⊔ m := le_sup_right
    calc f n m ≤ f (n ⊔ m) m := hfn m hk
      _ ≤ f (n ⊔ m) (n ⊔ m) := hfm (n ⊔ m) hk'
      _ ≤ ⨆ n', f n' n' := le_iSup (fun n' => f n' n') (n ⊔ m)
  · refine iSup_le fun n => le_trans (le_iSup (f n) n) (le_iSup (fun n' => ⨆ m, f n' m)
    n)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

3

iSup2_monotone_eq_diagonal.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iSup₂_monotone_eq_diagonal {α : Type*} [CompleteLattice α] (f : ℕ → ℕ → α)
    (hfm : ∀ n, Monotone (f n)) (hfn : ∀ m, Monotone (fun n => f n m)) :
    ⋃ n, ⋃ m, f n m = ⋃ n, f n n := by
  apply le_antisymm
  · refine iSup_le fun n => iSup_le fun m => ?_
    have hk : n ≤ n ⊔ m := le_sup_left
    have hk' : m ≤ n ⊔ m := le_sup_right
    calc f n m ≤ f (n ⊔ m) m := hfn m hk
      _ ≤ f (n ⊔ m) (n ⊔ m) := hfm (n ⊔ m) hk'
      _ ≤ ⋃ n', f n' n' := le_iSup (fun n' => f n' n') (n ⊔ m)
  · refine iSup_le fun n => le_trans (le_iSup (f n) n) (le_iSup (fun n' => ⋃ m, f n' m)
    n)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

4

iSup2_monotone_eq_diagonal.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))
```

```
theorem iSup₂_monotone_eq_diagonal {α : Type*} [CompleteLattice α] (f : ℕ → ℕ → α)
    (hfm : ∀ n, Monotone (f n)) (hfn : ∀ m, Monotone (fun n => f n m)) :
    ⋃ n, ⋃ m, f n m = ⋃ n, f n n := by
  apply le_antisymm
  · refine iSup_le fun n => iSup_le fun m => ?_
    have hk : n ≤ n ⊔ m := le_sup_left
    have hk' : m ≤ n ⊔ m := le_sup_right
    calc f n m ≤ f (n ⊔ m) m := hfn m hk
      _ ≤ f (n ⊔ m) (n ⊔ m) := hfm (n ⊔ m) hk'
      _ ≤ ⋃ n', f n' n' := le_iSup (fun n' => f n' n') (n ⊔ m)
  · refine iSup_le fun n => le_trans (le_iSup (f n) n) (le_iSup (fun n' => ⋃ m, f n' m)
    n)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

5

iSup2_monotone_eq_diagonal.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iSup₂_monotone_eq_diagonal {α : Type*} [CompleteLattice α] (f : ℕ → ℕ → α)
    (hfm : ∀ n, Monotone (f n)) (hfn : ∀ m, Monotone (fun n => f n m)) :
    ⋃ n, ⋃ m, f n m = ⋃ n, f n n := by
  apply le_antisymm
  · refine iSup_le fun n => iSup_le fun m => ?_
    have hk : n ≤ n ⊔ m := le_sup_left
    have hk' : m ≤ n ⊔ m := le_sup_right
    calc f n m ≤ f (n ⊔ m) m := hfn m hk
      _ ≤ f (n ⊔ m) (n ⊔ m) := hfm (n ⊔ m) hk'
      _ ≤ ⋃ n', f n' n' := le_iSup (fun n' => f n' n') (n ⊔ m)
  · refine iSup_le fun n => le_trans (le_iSup (f n) n) (le_iSup (fun n' => ⋃ m, f n' m)
    n)
```

```
end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

6

iSup2_monotone_eq_diagonal.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iSup₂_monotone_eq_diagonal {α : Type*} [CompleteLattice α] (f : ℕ → ℕ → α)
    (hfm : ∀ n, Monotone (f n)) (hfn : ∀ m, Monotone (fun n => f n m)) :
    ⨆ n, ⨆ m, f n m = ⨆ n, f n n := by
  apply le_antisymm
  · refine iSup_le fun n => iSup_le fun m => ?_
    have hk : n ≤ n ⊔ m := le_sup_left
    have hk' : m ≤ n ⊔ m := le_sup_right
    calc f n m ≤ f (n ⊔ m) m := hfn m hk
      _ ≤ f (n ⊔ m) (n ⊔ m) := hfm (n ⊔ m) hk'
      _ ≤ ⨆ n', f n' n' := le_iSup (fun n' => f n' n') (n ⊔ m)
  · refine iSup_le fun n => le_trans (le_iSup (f n) n) (le_iSup (fun n' => ⨆ m, f n' m)
    n)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

7

iSup2_monotone_eq_diagonal.lean

```
module
```

```
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iSup₂_monotone_eq_diagonal {α : Type*} [CompleteLattice α] (f : ℕ → ℕ → α)
    (hfm : ∀ n, Monotone (f n)) (hfn : ∀ m, Monotone (fun n => f n m)) :
    ⋃ n, ⋃ m, f n m = ⋃ n, f n n := by
  apply le_antisymm
  · refine iSup_le fun n => iSup_le fun m => ?_
    have hk : n ≤ n ⊔ m := le_sup_left
    have hk' : m ≤ n ⊔ m := le_sup_right
    calc f n m ≤ f (n ⊔ m) m := hfn m hk
      _ ≤ f (n ⊔ m) (n ⊔ m) := hfm (n ⊔ m) hk'
      _ ≤ ⋃ n', f n' n' := le_iSup (fun n' => f n' n') (n ⊔ m)
  · refine iSup_le fun n => le_trans (le_iSup (f n) n) (le_iSup (fun n' => ⋃ m, f n' m)
    n)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

8

iSup2_monotone_eq_diagonal.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))
```

```
section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem iSup₂_monotone_eq_diagonal {α : Type*} [CompleteLattice α] (f : ℕ → ℕ → α)
    (hfm : ∀ n, Monotone (f n)) (hfn : ∀ m, Monotone (fun n => f n m)) :
    ⨆ n, ⨆ m, f n m = ⨆ n, f n n := by
  apply le_antisymm
  · refine iSup_le fun n => iSup_le fun m => ?_
    have hk : n ≤ n ⊔ m := le_sup_left
    have hk' : m ≤ n ⊔ m := le_sup_right
    calc f n m ≤ f (n ⊔ m) m := hfn m hk
      _ ≤ f (n ⊔ m) (n ⊔ m) := hfm (n ⊔ m) hk'
      _ ≤ ⨆ n', f n' n' := le_iSup (fun n' => f n' n') (n ⊔ m)
  · refine iSup_le fun n => le_trans (le_iSup (f n) n) (le_iSup (fun n' => ⨆ m, f n' m)
     n)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

9

conjMap_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conjMap_iSup (n : ℕ) (post : ScottMap (DInf D₀ j₀) (towerType D₀ n))
    (pre : ScottMap (towerType D₀ n) (DInf D₀ j₀))
    (f : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (hf : Monotone f) :
    conjMap post pre (⨆ m, f m) = ⨆ m, conjMap post pre (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
```

```
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (conjMap post pre).preservesDirectedSup_coe (Set.range f) hne hdir, ← Set.
    range_comp]
  rfl

theorem conjMap_incl_le_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).incl
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n) f)
      ≤ conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f := by
  refine ScottMap.le_def.mpr fun y => ?_
  calc (towerProj D₀ j₀ n).incl
         (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
           (f (embInf (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr y)))
    )
      ≤ (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))) := by
        refine (towerProj D₀ j₀ n).incl.monotone
          ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n).monotone (f.
    monotone ?_))
        rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr
    y)]
        exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl_retr_le y)
    _ ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y)) :=
        incl_projInf_le_projInf_succ D₀ j₀ n
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))

end LimitMaps

end DomainTheory.ContinuousLattice
```

0

conjMap_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps
```

```
variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conjMap_iSup (n : ℕ) (post : ScottMap (DInf D₀ j₀) (towerType D₀ n))
    (pre : ScottMap (towerType D₀ n) (DInf D₀ j₀))
    (f : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (hf : Monotone f) :
    conjMap post pre (⋃ m, f m) = ⋃ m, conjMap post pre (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (conjMap post pre).preservesDirectedSup_coe (Set.range f) hne hdir, ← Set.
    range_comp]
  rfl

theorem conjMap_incl_le_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).incl
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n) f)
      ≤ conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f := by
  refine ScottMap.le_def.mpr fun y => ?_
  calc (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr y)))
    )
      ≤ (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))) := by
        refine (towerProj D₀ j₀ n).incl.monotone
          ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n).monotone (f.
    monotone ?_))
        rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr
    y)]
        exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl_retr_le y)
    _ ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y)) :=
        incl_projInf_le_projInf_succ D₀ j₀ n
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))

end LimitMaps

end DomainTheory.ContinuousLattice
```

1

conjMap_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
```

```
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conjMap_iSup (n : ℕ) (post : ScottMap (DInf D₀ j₀) (towerType D₀ n))
    (pre : ScottMap (towerType D₀ n) (DInf D₀ j₀))
    (f : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (hf : Monotone f) :
    conjMap post pre (⋃ m, f m) = ⋃ m, conjMap post pre (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (conjMap post pre).preservesDirectedSup_coe (Set.range f) hne hdir, ← Set.
    range_comp]
  rfl

theorem conjMap_incl_le_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).incl
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n) f)
      ≤ conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f := by
  refine ScottMap.le_def.mpr fun y => ?_
  calc (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr y)))
    )
      ≤ (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))) := by
        refine (towerProj D₀ j₀ n).incl.monotone
          ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n).monotone (f.
    monotone ?_))
        rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr
    y)]
        exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl_retr_le y)
    _ ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y)) :=
        incl_projInf_le_projInf_succ D₀ j₀ n
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))

end LimitMaps

end DomainTheory.ContinuousLattice
```

conjMap_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conjMap_iSup (n : ℕ) (post : ScottMap (DInf D₀ j₀) (towerType D₀ n))
    (pre : ScottMap (towerType D₀ n) (DInf D₀ j₀))
    (f : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (hf : Monotone f) :
    conjMap post pre (⋃ m, f m) = ⋃ m, conjMap post pre (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (conjMap post pre).preservesDirectedSup_coe (Set.range f) hne hdir, ← Set.
    range_comp]
  rfl

theorem conjMap_incl_le_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).incl
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n) f)
      ≤ conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f := by
  refine ScottMap.le_def.mpr fun y => ?_
  calc (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr y)))
    )
      ≤ (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))) := by
        refine (towerProj D₀ j₀ n).incl.monotone
          ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n).monotone (f.
    monotone ?_))
        rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr
    y)]
```

```
        exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl_retr_le y)
    _ ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y)) :=
        incl_projInf_le_projInf_succ D₀ j₀ n
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))

end LimitMaps

end DomainTheory.ContinuousLattice
```

3

conjMap_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conjMap_iSup (n : ℕ) (post : ScottMap (DInf D₀ j₀) (towerType D₀ n))
    (pre : ScottMap (towerType D₀ n) (DInf D₀ j₀))
    (f : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (hf : Monotone f) :
    conjMap post pre (⋃ m, f m) = ⋃ m, conjMap post pre (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (conjMap post pre).preservesDirectedSup_coe (Set.range f) hne hdir, ← Set.
    range_comp]
  rfl

theorem conjMap_incl_le_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).incl
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n) f)
      ≤ conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f := by
  refine ScottMap.le_def.mpr fun y => ?_
  calc (towerProj D₀ j₀ n).incl
```

```
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr y)))
    )
      ≤ (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))) := by
        refine (towerProj D₀ j₀ n).incl.monotone
          ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n).monotone (f.
    monotone ?_))
        rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr
    y)]
        exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl_retr_le y)
    _ ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y)) :=
        incl_projInf_le_projInf_succ D₀ j₀ n
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))

end LimitMaps

end DomainTheory.ContinuousLattice
```

4

conjMap_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conjMap_iSup (n : ℕ) (post : ScottMap (DInf D₀ j₀) (towerType D₀ n))
    (pre : ScottMap (towerType D₀ n) (DInf D₀ j₀))
    (f : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (hf : Monotone f) :
    conjMap post pre (⋃ m, f m) = ⋃ m, conjMap post pre (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (conjMap post pre).preservesDirectedSup_coe (Set.range f) hne hdir, ← Set.
```

```
    range_comp]
  rfl

theorem conjMap_incl_le_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).incl
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n) f)
      ≤ conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f := by
  refine ScottMap.le_def.mpr fun y => ?_
  calc (towerProj D₀ j₀ n).incl
         (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
           (f (embInf (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr y)))
    )
      ≤ (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))) := by
        refine (towerProj D₀ j₀ n).incl.monotone
          ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n).monotone (f.
    monotone ?_))
        rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr
    y)]
        exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl_retr_le y)
    _ ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y)) :=
        incl_projInf_le_projInf_succ D₀ j₀ n
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))

end LimitMaps

end DomainTheory.ContinuousLattice
```

5

conjMap_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))
```

```
theorem conjMap_iSup (n : ℕ) (post : ScottMap (DInf D₀ j₀) (towerType D₀ n))
    (pre : ScottMap (towerType D₀ n) (DInf D₀ j₀))
    (f : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (hf : Monotone f) :
    conjMap post pre (⋃ m, f m) = ⋃ m, conjMap post pre (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (conjMap post pre).preservesDirectedSup_coe (Set.range f) hne hdir, ← Set.
    range_comp]
  rfl

theorem conjMap_incl_le_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).incl
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n) f)
      ≤ conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f := by
  refine ScottMap.le_def.mpr fun y => ?_
  calc (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr y)))
    )
      ≤ (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))) := by
        refine (towerProj D₀ j₀ n).incl.monotone
          ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n).monotone (f.
    monotone ?_))
        rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr
    y)]
        exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl_retr_le y)
    _ ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y)) :=
        incl_projInf_le_projInf_succ D₀ j₀ n
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))

end LimitMaps

end DomainTheory.ContinuousLattice
```

6

conjMap_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic
```

```
public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conjMap_iSup (n : ℕ) (post : ScottMap (DInf D₀ j₀) (towerType D₀ n))
    (pre : ScottMap (towerType D₀ n) (DInf D₀ j₀))
    (f : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (hf : Monotone f) :
    conjMap post pre (⋃ m, f m) = ⋃ m, conjMap post pre (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (conjMap post pre).preservesDirectedSup_coe (Set.range f) hne hdir, ← Set.
    range_comp]
  rfl

theorem conjMap_incl_le_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).incl
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n) f)
      ≤ conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f := by
  refine ScottMap.le_def.mpr fun y => ?_
  calc (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr y)))
    )
      ≤ (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))) := by
        refine (towerProj D₀ j₀ n).incl.monotone
          ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n).monotone (f.
    monotone ?_))
        rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr
    y)]
        exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl_retr_le y)
    _ ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y)) :=
        incl_projInf_le_projInf_succ D₀ j₀ n
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))

end LimitMaps

end DomainTheory.ContinuousLattice
```

conjMap_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conjMap_iSup (n : ℕ) (post : ScottMap (DInf D₀ j₀) (towerType D₀ n))
    (pre : ScottMap (towerType D₀ n) (DInf D₀ j₀))
    (f : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (hf : Monotone f) :
    conjMap post pre (⋃ m, f m) = ⋃ m, conjMap post pre (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (conjMap post pre).preservesDirectedSup_coe (Set.range f) hne hdir, ← Set.
    range_comp]
  rfl

theorem conjMap_incl_le_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).incl
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n) f)
      ≤ conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f := by
  refine ScottMap.le_def.mpr fun y => ?_
  calc (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr y)))
    )
      ≤ (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))) := by
        refine (towerProj D₀ j₀ n).incl.monotone
          ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n).monotone (f.
    monotone ?_))
        rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr
    y)]
        exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl_retr_le y)
```

```
    _ ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y)) :=
        incl_projInf_le_projInf_succ D₀ j₀ n
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))

end LimitMaps

end DomainTheory.ContinuousLattice
```

8

conjMap_iSup.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    incl_projInf_le_projInf_succ
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conjMap_iSup (n : ℕ) (post : ScottMap (DInf D₀ j₀) (towerType D₀ n))
    (pre : ScottMap (towerType D₀ n) (DInf D₀ j₀))
    (f : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (hf : Monotone f) :
    conjMap post pre (⋃ m, f m) = ⋃ m, conjMap post pre (f m) := by
  have hdir : DirectedOn (· ≤ ·) (Set.range f) :=
    directedOn_range.2 fun a b => ⟨max a b, hf (le_max_left a b), hf (le_max_right a b)
    ⟩
  have hne := Set.range_nonempty f
  rw [show (⋃ m, f m) = sSup (Set.range f) from sSup_range.symm,
    (conjMap post pre).preservesDirectedSup_coe (Set.range f) hne hdir, ← Set.
    range_comp]
  rfl

theorem conjMap_incl_le_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).incl
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n) f)
      ≤ conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f := by
  refine ScottMap.le_def.mpr fun y => ?_
  calc (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr y)))
```

```
    )
      ≤ (towerProj D₀ j₀ n).incl
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
            (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))) := by
        refine (towerProj D₀ j₀ n).incl.monotone
          ((limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n).monotone (f.
    monotone ?_))
        rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) n ((towerProj D₀ j₀ n).retr
    y)]
        exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl_retr_le y)
    _ ≤ limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y)) :=
        incl_projInf_le_projInf_succ D₀ j₀ n
          (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1) y))

end LimitMaps

end DomainTheory.ContinuousLattice
```

9

conj_iInfTerm_eq.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_2
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conj_iInfTerm_eq (n : ℕ) (x : DInf D₀ j₀) :
    conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
            (embInf (towerType D₀) (towerProj D₀ j₀) n)
            (iInfTerm D₀ j₀ n x) = x.1 (n + 1) :=
  (FunctionSpace.projection
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)).retr_incl
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) x)

end Thm44b
```

```
end LimitMaps

end DomainTheory.ContinuousLattice
```

0

conj_iInfTerm_eq.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_2
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conj_iInfTerm_eq (n : ℕ) (x : DInf D₀ j₀) :
    conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
            (embInf (towerType D₀) (towerProj D₀ j₀) n)
            (iInfTerm D₀ j₀ n x) = x.1 (n + 1) :=
  (FunctionSpace.projection
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)).retr_incl
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

1

conj_iInfTerm_eq.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_2
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace
```

```
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conj_iInfTerm_eq (n : ℕ) (x : DInf D₀ j₀) :
    conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
            (embInf (towerType D₀) (towerProj D₀ j₀) n)
            (iInfTerm D₀ j₀ n x) = x.1 (n + 1) :=
  (FunctionSpace.projection
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)).retr_incl
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

2

conj_iInfTerm_eq.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_2
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))
```

```
theorem conj_iInfTerm_eq (n : ℕ) (x : DInf D₀ j₀) :
    conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
            (embInf (towerType D₀) (towerProj D₀ j₀) n)
            (iInfTerm D₀ j₀ n x) = x.1 (n + 1) :=
  (FunctionSpace.projection
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)).retr_incl
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

3

conj_iInfTerm_eq.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_2
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conj_iInfTerm_eq (n : ℕ) (x : DInf D₀ j₀) :
    conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
            (embInf (towerType D₀) (towerProj D₀ j₀) n)
            (iInfTerm D₀ j₀ n x) = x.1 (n + 1) :=
  (FunctionSpace.projection
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)).retr_incl
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

4

conj_iInfTerm_eq.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_2
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conj_iInfTerm_eq (n : ℕ) (x : DInf D₀ j₀) :
    conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
            (embInf (towerType D₀) (towerProj D₀ j₀) n)
            (iInfTerm D₀ j₀ n x) = x.1 (n + 1) :=
  (FunctionSpace.projection
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)).retr_incl
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

5

conj_iInfTerm_eq.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_2
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str
```

```
section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conj_iInfTerm_eq (n : ℕ) (x : DInf D₀ j₀) :
    conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
            (embInf (towerType D₀) (towerProj D₀ j₀) n)
            (iInfTerm D₀ j₀ n x) = x.1 (n + 1) :=
  (FunctionSpace.projection
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)).retr_incl
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

6

conj_iInfTerm_eq.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_2
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conj_iInfTerm_eq (n : ℕ) (x : DInf D₀ j₀) :
    conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
            (embInf (towerType D₀) (towerProj D₀ j₀) n)
            (iInfTerm D₀ j₀ n x) = x.1 (n + 1) :=
```

```
  (FunctionSpace.projection
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)).retr_incl
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

7

conj_iInfTerm_eq.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_2
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conj_iInfTerm_eq (n : ℕ) (x : DInf D₀ j₀) :
    conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
            (embInf (towerType D₀) (towerProj D₀ j₀) n)
            (iInfTerm D₀ j₀ n x) = x.1 (n + 1) :=
  (FunctionSpace.projection
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)).retr_incl
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

8

5.4 Constructivity summary

Bridge	Footprint	Notes
Nbhd ↔ InfoSys (both directions)	+ inherited `Classical.choice`	Decidable coding; Mathlib 4.33 `Finset` instance frontier
CL ↔ RoundFilter	`{propext, Quot.sound}`	Roundness is order-theoretic
InfoSys ↔ Ideal	+ inherited `Classical.choice`	Factoids 4.4–4.5; type-level `Finset` frontier
Algebraic ⇒ CL	classical	1972 topological $\ll$
Product / function space (1982)	+ inherited `Classical.choice`	No witness extraction in the maps
Separated sum (1982)	+ `Classical.choice`	Token polarity trichotomy
Factoid 4.6 ApproxMap ↔ ScottContinuous	+ inherited `Classical.choice`	Type-level `Finset` frontier
ScottMap conjugation	+ `Classical.choice`	Via 1972 `ScottMap`

Target discipline (from the 1982 package): prefer constructive proofs wherever Scott's 1982 text emphasizes constructivity; call out classical frontiers explicitly rather than hiding choice in automation.

Mathlib 4.33 makes `Finset.instSetLike` and `Finset.instPartialOrder` depend on `Classical.choice`. Consequently `#print axioms` reports choice for declarations whose types traverse `InfoSys`, even when their proof terms only manipulate explicit finite data. Here "no witness extraction" distinguishes that inherited library-instance footprint from genuine uses such as separated-sum polarity classification.

5.5 Worked example — S-expressions / trees

Dependencies. Inside WorkedExampleSExpr, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. BridgeTheorems is the Lean files in that chapter folder, not in a subfolder. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

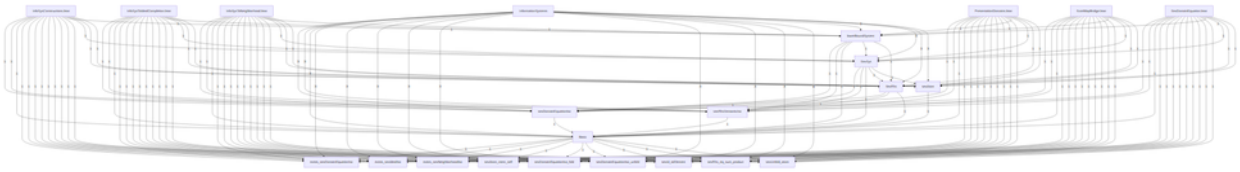

Figure 58: Worked example — S-expressions / trees.

Lean packaging: `WorkedExampleSExpr.lean`, `SexDomainEquation.lean`. The Palomar compared family includes `sexNeighborhoodIso`, `sexIdealIso`, and `sexDomainEquationIso` (Challenge / `comparator.json`). The compared domain-equation declaration is the order isomorphism `SexSys.Element ≃o SexRhs.Element` (`|T| ≃o |A + (T × T)|`), not the generic semantic factor `WithBot (|A| ⊕ (|T| × |T|)) ≃o |A + (T × T)|`.

5.5.1 Overview

The bridges of §§2–3 are abstract. This section fixes **one** concrete domain — Scott's S-expression / tree equation `T ≅ A + (T × T)` (**[Sco82]**, Factoid 8.1) over the $\mathbb{N}$ lower-bound atom system (Factoid 2.4) — and asks what that domain looks like in each paradigm:

Paradigm	What an element of `T` is
1982	a consistent, deductively closed set of tree tokens
1980	a filter of basic opens `[u]` on that token domain
1972	a point of an algebraic continuous lattice (ideal of finite elements)

We build the domain natively as an information system (§5.2), then **read the same carrier** as a neighbourhood system (§5.3) and as a continuous lattice (§5.4). Section 5.5 exhibits the order isomorphisms for this instance — so that, on S-expressions,

`T_1982 ≃o T_1980 ≃o Ideal(K(T))` and `Ideal(K(T))` is a continuous lattice,

hence transitively `T_1982 ≃o T_1980` and (via the algebraic ⇒ continuous frontier) the 1972 presentation of the same domain. Order isomorphism is an equivalence relation, so the three presentations determine one domain up to `≃o`. Section 5.6 records two extras that live on top of the carriers: the domain equation at the level of domains, and identity as a morphism in both the approximable-map and Scott-continuous languages.

5.5.2 Information system (1982)

Atoms are propositions `n ≤ x` on $\mathbb{N}$ (`lowerBoundSystem`). The tree system `SexSys := treeSystem lowerBoundSystem` has inductive tokens `TreeToken ℕ` (`bot` / `atom` / `pairL` / `pairR`). Consistency and entailment are Scott's sum×product clauses; Factoid 8.1 records that this is literally the information system of the right-hand side `A + (T × T)`:

- `SexRhs = sumSystem A (productSystem T T)` (`sexRhs_eq_sum_product`);
- token unfolding `treeUnfold` sends `atom n` to the left summand (`sexUnfold_atom`) and is a retraction onto the official sum-of-product carrier, with section `treeFold`;
- TreeEnt matches official product `ent_bot` on the two encodings of `(Δ, Δ)` (`pairL Δ` and `pairR Δ`), so closed elements are saturated for `ker(treeUnfold)`.

Finite elements include singleton atom closures `sexAtom n = ū` for `u = {atom n}`. Elements of `|T|` are the consistent closed sets of tokens — the 1982 presentation of the S-expression domain.

5.5.3 Neighbourhood system (1980)

From `|T|` one obtains a neighbourhood system whose basic opens are `[u] = {x ∈ |T| | ↑u ⊆ x}`. In this paradigm an element of the domain is a **filter** of such opens (not a raw set of tokens). Nothing new is invented: it is the image of `SexSys` under `InfoSysToNeighborhood`. The concrete iso of §5.5 below is exactly "read each token-element as its filter of basic opens."

5.5.4 Continuous lattice (1972)

Finite elements `K(T)` are the closures of consistent finsets. In the algebraic style that feeds Scott's 1972 theory, a domain element is an **ideal** of `K(T)` — the ideal completion of the compact basis. That poset of ideals is an algebraic complete lattice, hence a continuous lattice (`AlgebraicLattice ⇒ ContinuousLattice`, §3.5). This is the 1972 presentation of the same S-expression domain: points ordered by inclusion of ideals, with way-below recovered from the compact basis.

We do not claim a choice-free `D ≃o RoundFilter` story built from trees alone; the round ⇑-filter identification of §3.1 applies once one is already in the continuous-lattice setting.

5.5.5 Equivalence for this instance

Specializing the bridges of §3 to `SexSys` yields order isomorphisms of carriers:

- `sexNeighborhoodIso : |T| ≃o` filters of `[u] (InfoSysToNeighborhood.domainOrderIso)` **— 1982 ≃o 1980**;
- `sexIdealIso : |T| ≃o Ideal (FiniteElement T) (InfoSysToIdealCompletion.domainOr` **— 1982 ≃o algebraic / 1972 carrier**;
- `sexNeighborhoodIdealIso (neighborhood_ideal_iso)` — the constructive triangle closing **1980 ≃o Ideal(K(T))** without going back through tokens.

Composing any two edges recovers the third: isomorphism is transitive, so on this example the three presentations are pairwise equivalent. The 1972 corner uses the algebraic ⇒ continuous implication already flagged in §3.5 / §4. The neighbourhood ↔ information ↔ ideal triangle inherits `Classical.choice` only through the `Finset` instance frontier of §4.

5.5.6 Domain equation and morphisms

Beyond identifying the carriers, the same example exercises constructions and maps.

Domain equation. Factoid 8.1's token unfolding `treeUnfold` (section `treeFold`) lifts to an order isomorphism of the tree domain with the official RHS domain:

`sexDomainEquationIso : SexSys.Element ≃o SexRhs.Element`

(`treeDomainIso`; `|T| ≃o |A + (T × T)|`). The maps are verified unfolding: the carrier of `sexDomainEquationIso x` is `treeUnfold ″ x.carrier`, and the carrier of the inverse is the preimage `treeUnfold ⁻¹′ y.carrier` (`sexDomainEquationIso_unfold` / `sexDomainEquationIso_fold`). The only non-injectivity of `treeUnfold` is Scott's two encodings of the product bottom (`pairL Δ` and `pairR Δ`); after the `ent_bot` match, closed elements are saturated for that kernel, so image and preimage invert. The generic semantic factor `WithBot (|A| ⊕ (|T| × |T|)) ≃o SexRhs.Element` is the uncompared `sexRhsSemanticIso` (classical only through the 1982 sum trichotomy); it is **not** the compared fixed-point equation.

Morphisms. The identity approximable map `idMap T` (Prop 5.4) transports along Factoid 4.6 to a Scott-continuous endomap `sexIdScottContinuous` with `toFun = id (sexId_toElement)` — the same endomap, named once in each morphism language.

Axioms. Object-level neighbourhood / ideal isos, `sexDomainEquationIso`, and Factoid 4.6 for `idMap` audit to `{propext, Classical.choice, Quot.sound}` through the InfoSys/`Finset`

frontier of §4. The uncompared semantic factor `sexRhsSemanticIso` additionally uses the 1982 sum trichotomy.

conj_iInfTerm_eq.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_2
public import DomainTheory.ContinuousLattice.FunctionSpaces.FunctionSpace

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem conj_iInfTerm_eq (n : ℕ) (x : DInf D₀ j₀) :
    conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
            (embInf (towerType D₀) (towerProj D₀ j₀) n)
            (iInfTerm D₀ j₀ n x) = x.1 (n + 1) :=
  (FunctionSpace.projection
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)
      (limitLevelProjection (towerType D₀) (towerProj D₀ j₀) n)).retr_incl
    (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1) x)

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

9

towerProj_retr_conjMap_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str
```

```
section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem towerProj_retr_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).retr
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                 (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f)
      = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  apply ScottMap.ext
  intro y
  show (towerProj D₀ j₀ n).retr
      (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl y))))
    = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
        (f (embInf (towerType D₀) (towerProj D₀ j₀) n y))
  rw [embInf.succ (towerType D₀) (towerProj D₀ j₀) n y]
  exact (f (embInf (towerType D₀) (towerProj D₀ j₀) n y)).2 n

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

0

towerProj_retr_conjMap_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b
```

```
variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem towerProj_retr_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).retr
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                 (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f)
      = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  apply ScottMap.ext
  intro y
  show (towerProj D₀ j₀ n).retr
      (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl y))))
    = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
        (f (embInf (towerType D₀) (towerProj D₀ j₀) n y))
  rw [embInf.succ (towerType D₀) (towerProj D₀ j₀) n y]
  exact (f (embInf (towerType D₀) (towerProj D₀ j₀) n y)).2 n

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

1

towerProj_retr_conjMap_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem towerProj_retr_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).retr
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                 (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f)
      = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
```

```
                (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  apply ScottMap.ext
  intro y
  show (towerProj D₀ j₀ n).retr
      (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl y))))
    = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
        (f (embInf (towerType D₀) (towerProj D₀ j₀) n y))
  rw [embInf.succ (towerType D₀) (towerProj D₀ j₀) n y]
  exact (f (embInf (towerType D₀) (towerProj D₀ j₀) n y)).2 n

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

2

towerProj_retr_conjMap_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem towerProj_retr_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).retr
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                 (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f)
      = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  apply ScottMap.ext
  intro y
  show (towerProj D₀ j₀ n).retr
      (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl y))))
    = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
```

```
        (f (embInf (towerType D₀) (towerProj D₀ j₀) n y))
  rw [embInf.succ (towerType D₀) (towerProj D₀ j₀) n y]
  exact (f (embInf (towerType D₀) (towerProj D₀ j₀) n y)).2 n

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

3

towerProj_retr_conjMap_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem towerProj_retr_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).retr
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                 (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f)
      = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  apply ScottMap.ext
  intro y
  show (towerProj D₀ j₀ n).retr
      (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl y))))
    = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
        (f (embInf (towerType D₀) (towerProj D₀ j₀) n y))
  rw [embInf.succ (towerType D₀) (towerProj D₀ j₀) n y]
  exact (f (embInf (towerType D₀) (towerProj D₀ j₀) n y)).2 n

end Thm44b

end LimitMaps
```

```
end DomainTheory.ContinuousLattice
```

4

towerProj_retr_conjMap_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem towerProj_retr_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).retr
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                 (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f)
      = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  apply ScottMap.ext
  intro y
  show (towerProj D₀ j₀ n).retr
      (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl y))))
    = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
        (f (embInf (towerType D₀) (towerProj D₀ j₀) n y))
  rw [embInf.succ (towerType D₀) (towerProj D₀ j₀) n y]
  exact (f (embInf (towerType D₀) (towerProj D₀ j₀) n y)).2 n

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

5

towerProj_retr_conjMap_succ.lean

```
module
```

```
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem towerProj_retr_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).retr
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                 (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f)
      = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  apply ScottMap.ext
  intro y
  show (towerProj D₀ j₀ n).retr
      (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl y))))
    = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
        (f (embInf (towerType D₀) (towerProj D₀ j₀) n y))
  rw [embInf.succ (towerType D₀) (towerProj D₀ j₀) n y]
  exact (f (embInf (towerType D₀) (towerProj D₀ j₀) n y)).2 n

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

6

towerProj_retr_conjMap_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str
```

```
section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem towerProj_retr_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).retr
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                 (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f)
      = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  apply ScottMap.ext
  intro y
  show (towerProj D₀ j₀ n).retr
      (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl y))))
    = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
        (f (embInf (towerType D₀) (towerProj D₀ j₀) n y))
  rw [embInf.succ (towerType D₀) (towerProj D₀ j₀) n y]
  exact (f (embInf (towerType D₀) (towerProj D₀ j₀) n y)).2 n

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

7

towerProj_retr_conjMap_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b
```

```
variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem towerProj_retr_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).retr
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                 (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f)
      = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  apply ScottMap.ext
  intro y
  show (towerProj D₀ j₀ n).retr
      (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl y))))
    = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
        (f (embInf (towerType D₀) (towerProj D₀ j₀) n y))
  rw [embInf.succ (towerType D₀) (towerProj D₀ j₀) n y]
  exact (f (embInf (towerType D₀) (towerProj D₀ j₀) n y)).2 n

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

8

towerProj_retr_conjMap_succ.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.InverseLimits.embInf

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44b

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem towerProj_retr_conjMap_succ (n : ℕ) (f : DInf.fn D₀ j₀) :
    (towerProj D₀ j₀ (n + 1)).retr
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1))
                 (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)) f)
      = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
```

```
              (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  apply ScottMap.ext
  intro y
  show (towerProj D₀ j₀ n).retr
      (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (f (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
          ((towerProj D₀ j₀ n).incl y))))
    = limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n
        (f (embInf (towerType D₀) (towerProj D₀ j₀) n y))
  rw [embInf.succ (towerType D₀) (towerProj D₀ j₀) n y]
  exact (f (embInf (towerType D₀) (towerProj D₀ j₀) n y)).2 n

end Thm44b

end LimitMaps

end DomainTheory.ContinuousLattice
```

9

projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInf_succ_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conj_iInfTerm_eq
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm_monotone
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def projInfInf : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  ⋃ n, jInfTerm D₀ j₀ n

namespace projInfInf

theorem apply (f : DInf.fn D₀ j₀) :
    projInfInf D₀ j₀ f = ⋃ n, jInfTerm D₀ j₀ n f := by
```

```
  show (sSup (Set.range (jInfTerm D₀ j₀)) : ScottMap _ _) f = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (projInfInf D₀ j₀ : DInf.fn D₀ j₀ → DInf D₀ j₀) :=
  (proposition_2_5 _).mp (projInfInf D₀ j₀).continuous

theorem embInfInf_eq (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = ⋃ n, embInf (towerType D₀) (towerProj D₀ j₀)
    (n + 1) (x.1 (n + 1)) := by
  rw [apply]
  set g := fun n m =>
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
      (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
               (embInf (towerType D₀) (towerProj D₀ j₀) n)
               (iInfTerm D₀ j₀ m x)) with hg
  have hmono (n : ℕ) : Monotone (fun m =>
      conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (iInfTerm D₀ j₀ m x)) := fun a b hab =>
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
      (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab))
  have hinner (n : ℕ) : jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x) = ⋃ m, g n m := by
    calc jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)
        = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
            (⋃ m, conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                          (embInf (towerType D₀) (towerProj D₀ j₀) n)
                          (iInfTerm D₀ j₀ m x)) := by
          rw [jInfTerm.apply, embInfInf.apply,
            conjMap_iSup D₀ j₀ n (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀
    ) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (fun m => iInfTerm D₀ j₀ m x) (iInfTerm_monotone D₀ j₀ x)]
          rfl
      _ = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
            (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                     (embInf (towerType D₀) (towerProj D₀ j₀) n)
                     (iInfTerm D₀ j₀ m x)) :=
          embInf_succ_iSup D₀ j₀ n _ (hmono n)
      _ = ⋃ m, g n m := by simp only [hg]
  have g_mono_m (n : ℕ) : Monotone (g n) := by
    intro a b hab
    rw [hg]
    exact (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).monotone
      ((conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
        (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab)))
  have g_mono_n_succ (m n : ℕ) : g n m ≤ g (n + 1) m := by
    rw [hg]
    dsimp only
    rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n)
                 (iInfTerm D₀ j₀ m x))]
```

```
    exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 2)
      (conjMap_incl_le_conjMap_succ D₀ j₀ n (iInfTerm D₀ j₀ m x))
  have g_mono_n (m : ℕ) : Monotone (fun n => g n m) :=
    monotone_nat_of_le_succ (g_mono_n_succ m)
  have hin : (⋃ n, jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)) = ⋃ n, ⋃ m, g n m := by
    congr 1
    funext n
    exact hinner n
  rw [hin, iSup₂_monotone_eq_diagonal g g_mono_m g_mono_n]
  congr 1
  funext n
  rw [hg]
  dsimp only
  rw [conj_iInfTerm_eq D₀ j₀ n x]

theorem comp_embInfInf :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro x
  have hmono : Monotone (fun k => embInf (towerType D₀) (towerProj D₀ j₀) k (x.1 k)) :=
    monotone_nat_of_le_succ (embInf.le_succ (towerType D₀) (towerProj D₀ j₀) x)
  rw [ScottMap.comp_apply, ScottMap.idMap_apply, embInfInf_eq D₀ j₀ x,
    Monotone.iSup_nat_add hmono 1]
  exact (inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) x).symm

theorem embInfInf (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = x := by
  have h := congrArg (fun g => g x) (comp_embInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

end projInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

0

projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInf_succ_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conj_iInfTerm_eq
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm_monotone
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
```

```
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def projInfInf : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  ⋃ n, jInfTerm D₀ j₀ n

namespace projInfInf

theorem apply (f : DInf.fn D₀ j₀) :
    projInfInf D₀ j₀ f = ⋃ n, jInfTerm D₀ j₀ n f := by
  show (sSup (Set.range (jInfTerm D₀ j₀)) : ScottMap _ _) f = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (projInfInf D₀ j₀ : DInf.fn D₀ j₀ → DInf D₀ j₀) :=
  (proposition_2_5 _).mp (projInfInf D₀ j₀).continuous

theorem embInfInf_eq (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = ⋃ n, embInf (towerType D₀) (towerProj D₀ j₀)
    (n + 1) (x.1 (n + 1)) := by
  rw [apply]
  set g := fun n m =>
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
      (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
               (embInf (towerType D₀) (towerProj D₀ j₀) n)
               (iInfTerm D₀ j₀ m x)) with hg
  have hmono (n : ℕ) : Monotone (fun m =>
      conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (iInfTerm D₀ j₀ m x)) := fun a b hab =>
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
      (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab))
  have hinner (n : ℕ) : jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x) = ⋃ m, g n m := by
    calc jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)
        = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
            (⋃ m, conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                          (embInf (towerType D₀) (towerProj D₀ j₀) n)
                          (iInfTerm D₀ j₀ m x)) := by
          rw [jInfTerm.apply, embInfInf.apply,
            conjMap_iSup D₀ j₀ n (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀
    ) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (fun m => iInfTerm D₀ j₀ m x) (iInfTerm_monotone D₀ j₀ x)]
          rfl
      _ = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
              (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
```

```
                      (embInf (towerType D₀) (towerProj D₀ j₀) n)
                      (iInfTerm D₀ j₀ m x)) :=
          embInf_succ_iSup D₀ j₀ n _ (hmono n)
      _ = ⋃ m, g n m := by simp only [hg]
  have g_mono_m (n : ℕ) : Monotone (g n) := by
    intro a b hab
    rw [hg]
    exact (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).monotone
      ((conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
        (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab)))
  have g_mono_n_succ (m n : ℕ) : g n m ≤ g (n + 1) m := by
    rw [hg]
    dsimp only
    rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n)
                 (iInfTerm D₀ j₀ m x))]
    exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 2)
      (conjMap_incl_le_conjMap_succ D₀ j₀ n (iInfTerm D₀ j₀ m x))
  have g_mono_n (m : ℕ) : Monotone (fun n => g n m) :=
    monotone_nat_of_le_succ (g_mono_n_succ m)
  have hin : (⋃ n, jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)) = ⋃ n, ⋃ m, g n m := by
    congr 1
    funext n
    exact hinner n
  rw [hin, iSup₂_monotone_eq_diagonal g g_mono_m g_mono_n]
  congr 1
  funext n
  rw [hg]
  dsimp only
  rw [conj_iInfTerm_eq D₀ j₀ n x]

theorem comp_embInfInf :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro x
  have hmono : Monotone (fun k => embInf (towerType D₀) (towerProj D₀ j₀) k (x.1 k)) :=
    monotone_nat_of_le_succ (embInf.le_succ (towerType D₀) (towerProj D₀ j₀) x)
  rw [ScottMap.comp_apply, ScottMap.idMap_apply, embInfInf_eq D₀ j₀ x,
    Monotone.iSup_nat_add hmono 1]
  exact (inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) x).symm

theorem embInfInf (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = x := by
  have h := congrArg (fun g => g x) (comp_embInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

end projInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInf_succ_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conj_iInfTerm_eq
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm_monotone
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def projInfInf : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  ⋃ n, jInfTerm D₀ j₀ n

namespace projInfInf

theorem apply (f : DInf.fn D₀ j₀) :
    projInfInf D₀ j₀ f = ⋃ n, jInfTerm D₀ j₀ n f := by
  show (sSup (Set.range (jInfTerm D₀ j₀)) : ScottMap _ _) f = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (projInfInf D₀ j₀ : DInf.fn D₀ j₀ → DInf D₀ j₀) :=
  (proposition_2_5 _).mp (projInfInf D₀ j₀).continuous

theorem embInfInf_eq (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = ⋃ n, embInf (towerType D₀) (towerProj D₀ j₀)
    (n + 1) (x.1 (n + 1)) := by
  rw [apply]
  set g := fun n m =>
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
      (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
               (embInf (towerType D₀) (towerProj D₀ j₀) n)
               (iInfTerm D₀ j₀ m x)) with hg
  have hmono (n : ℕ) : Monotone (fun m =>
      conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
```

```
            (iInfTerm D₀ j₀ m x)) := fun a b hab =>
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
      (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab))
  have hinner (n : ℕ) : jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x) = ⋃ m, g n m :=
    calc jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)
        = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
            (⋃ m, conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                          (embInf (towerType D₀) (towerProj D₀ j₀) n)
                          (iInfTerm D₀ j₀ m x)) := by
          rw [jInfTerm.apply, embInfInf.apply,
            conjMap_iSup D₀ j₀ n (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀
    ) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (fun m => iInfTerm D₀ j₀ m x) (iInfTerm_monotone D₀ j₀ x)]
          rfl
      _ = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
              (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                       (embInf (towerType D₀) (towerProj D₀ j₀) n)
                       (iInfTerm D₀ j₀ m x)) :=
          embInf_succ_iSup D₀ j₀ n _ (hmono n)
      _ = ⋃ m, g n m := by simp only [hg]
  have g_mono_m (n : ℕ) : Monotone (g n) := by
    intro a b hab
    rw [hg]
    exact (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).monotone
      ((conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
        (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab)))
  have g_mono_n_succ (m n : ℕ) : g n m ≤ g (n + 1) m := by
    rw [hg]
    dsimp only
    rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n)
                 (iInfTerm D₀ j₀ m x))]
    exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 2)
      (conjMap_incl_le_conjMap_succ D₀ j₀ n (iInfTerm D₀ j₀ m x))
  have g_mono_n (m : ℕ) : Monotone (fun n => g n m) :=
    monotone_nat_of_le_succ (g_mono_n_succ m)
  have hin : (⋃ n, jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)) = ⋃ n, ⋃ m, g n m := by
    congr 1
    funext n
    exact hinner n
  rw [hin, iSup₂_monotone_eq_diagonal g g_mono_m g_mono_n]
  congr 1
  funext n
  rw [hg]
  dsimp only
  rw [conj_iInfTerm_eq D₀ j₀ n x]

theorem comp_embInfInf :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro x
  have hmono : Monotone (fun k => embInf (towerType D₀) (towerProj D₀ j₀) k (x.1 k)) :=
```

```
    monotone_nat_of_le_succ (embInf.le_succ (towerType D₀) (towerProj D₀ j₀) x)
  rw [ScottMap.comp_apply, ScottMap.idMap_apply, embInfInf_eq D₀ j₀ x,
    Monotone.iSup_nat_add hmono 1]
  exact (inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) x).symm

theorem embInfInf (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = x := by
  have h := congrArg (fun g => g x) (comp_embInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

end projInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

2

projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInf_succ_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conj_iInfTerm_eq
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm_monotone
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def projInfInf : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  ⋃ n, jInfTerm D₀ j₀ n

namespace projInfInf

theorem apply (f : DInf.fn D₀ j₀) :
    projInfInf D₀ j₀ f = ⋃ n, jInfTerm D₀ j₀ n f := by
  show (sSup (Set.range (jInfTerm D₀ j₀)) : ScottMap _ _) f = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
```

```
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (projInfInf D₀ j₀ : DInf.fn D₀ j₀ → DInf D₀ j₀) :=
  (proposition_2_5 _).mp (projInfInf D₀ j₀).continuous

theorem embInfInf_eq (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = ⋃ n, embInf (towerType D₀) (towerProj D₀ j₀)
    (n + 1) (x.1 (n + 1)) := by
  rw [apply]
  set g := fun n m =>
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
      (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
               (embInf (towerType D₀) (towerProj D₀ j₀) n)
               (iInfTerm D₀ j₀ m x)) with hg
  have hmono (n : ℕ) : Monotone (fun m =>
      conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (iInfTerm D₀ j₀ m x)) := fun a b hab =>
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
      (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab))
  have hinner (n : ℕ) : jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x) = ⋃ m, g n m := by
    calc jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)
        = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
            (⋃ m, conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                          (embInf (towerType D₀) (towerProj D₀ j₀) n)
                          (iInfTerm D₀ j₀ m x)) := by
          rw [jInfTerm.apply, embInfInf.apply,
            conjMap_iSup D₀ j₀ n (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀
  ) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (fun m => iInfTerm D₀ j₀ m x) (iInfTerm_monotone D₀ j₀ x)]
          rfl
      _ = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
              (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                       (embInf (towerType D₀) (towerProj D₀ j₀) n)
                       (iInfTerm D₀ j₀ m x)) :=
          embInf_succ_iSup D₀ j₀ n _ (hmono n)
      _ = ⋃ m, g n m := by simp only [hg]
  have g_mono_m (n : ℕ) : Monotone (g n) := by
    intro a b hab
    rw [hg]
    exact (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).monotone
      ((conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
        (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab)))
  have g_mono_n_succ (m n : ℕ) : g n m ≤ g (n + 1) m := by
    rw [hg]
    dsimp only
    rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n)
                 (iInfTerm D₀ j₀ m x))]
    exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 2)
      (conjMap_incl_le_conjMap_succ D₀ j₀ n (iInfTerm D₀ j₀ m x))
```

```
  have g_mono_n (m : ℕ) : Monotone (fun n => g n m) :=
    monotone_nat_of_le_succ (g_mono_n_succ m)
  have hin : (⋃ n, jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)) = ⋃ n, ⋃ m, g n m := by
    congr 1
    funext n
    exact hinner n
  rw [hin, iSup₂_monotone_eq_diagonal g g_mono_m g_mono_n]
  congr 1
  funext n
  rw [hg]
  dsimp only
  rw [conj_iInfTerm_eq D₀ j₀ n x]

theorem comp_embInfInf :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro x
  have hmono : Monotone (fun k => embInf (towerType D₀) (towerProj D₀ j₀) k (x.1 k)) :=
    monotone_nat_of_le_succ (embInf.le_succ (towerType D₀) (towerProj D₀ j₀) x)
  rw [ScottMap.comp_apply, ScottMap.idMap_apply, embInfInf_eq D₀ j₀ x,
    Monotone.iSup_nat_add hmono 1]
  exact (inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) x).symm

theorem embInfInf (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = x := by
  have h := congrArg (fun g => g x) (comp_embInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

end projInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

3

projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInf_succ_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conj_iInfTerm_eq
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm_monotone
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def projInfInf : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  ⋃ n, jInfTerm D₀ j₀ n

namespace projInfInf

theorem apply (f : DInf.fn D₀ j₀) :
    projInfInf D₀ j₀ f = ⋃ n, jInfTerm D₀ j₀ n f := by
  show (sSup (Set.range (jInfTerm D₀ j₀)) : ScottMap _ _) f = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (projInfInf D₀ j₀ : DInf.fn D₀ j₀ → DInf D₀ j₀) :=
  (proposition_2_5 _).mp (projInfInf D₀ j₀).continuous

theorem embInfInf_eq (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = ⋃ n, embInf (towerType D₀) (towerProj D₀ j₀)
    (n + 1) (x.1 (n + 1)) := by
  rw [apply]
  set g := fun n m =>
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
      (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
               (embInf (towerType D₀) (towerProj D₀ j₀) n)
               (iInfTerm D₀ j₀ m x)) with hg
  have hmono (n : ℕ) : Monotone (fun m =>
      conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (iInfTerm D₀ j₀ m x)) := fun a b hab =>
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
      (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab))
  have hinner (n : ℕ) : jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x) = ⋃ m, g n m := by
    calc jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)
        = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
            (⋃ m, conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                          (embInf (towerType D₀) (towerProj D₀ j₀) n)
                          (iInfTerm D₀ j₀ m x)) := by
          rw [jInfTerm.apply, embInfInf.apply,
            conjMap_iSup D₀ j₀ n (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀
    ) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (fun m => iInfTerm D₀ j₀ m x) (iInfTerm_monotone D₀ j₀ x)]
          rfl
      _ = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
              (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                       (embInf (towerType D₀) (towerProj D₀ j₀) n)
                       (iInfTerm D₀ j₀ m x)) :=
```

```
          embInf_succ_iSup D₀ j₀ n _ (hmono n)
      _ = ⋃ m, g n m := by simp only [hg]
  have g_mono_m (n : ℕ) : Monotone (g n) := by
    intro a b hab
    rw [hg]
    exact (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).monotone
      ((conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
        (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab)))
  have g_mono_n_succ (m n : ℕ) : g n m ≤ g (n + 1) m := by
    rw [hg]
    dsimp only
    rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n)
                 (iInfTerm D₀ j₀ m x))]
    exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 2)
      (conjMap_incl_le_conjMap_succ D₀ j₀ n (iInfTerm D₀ j₀ m x))
  have g_mono_n (m : ℕ) : Monotone (fun n => g n m) :=
    monotone_nat_of_le_succ (g_mono_n_succ m)
  have hin : (⋃ n, jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)) = ⋃ n, ⋃ m, g n m := by
    congr 1
    funext n
    exact hinner n
  rw [hin, iSup₂_monotone_eq_diagonal g g_mono_m g_mono_n]
  congr 1
  funext n
  rw [hg]
  dsimp only
  rw [conj_iInfTerm_eq D₀ j₀ n x]

theorem comp_embInfInf :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro x
  have hmono : Monotone (fun k => embInf (towerType D₀) (towerProj D₀ j₀) k (x.1 k)) :=
    monotone_nat_of_le_succ (embInf.le_succ (towerType D₀) (towerProj D₀ j₀) x)
  rw [ScottMap.comp_apply, ScottMap.idMap_apply, embInfInf_eq D₀ j₀ x,
    Monotone.iSup_nat_add hmono 1]
  exact (inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) x).symm

theorem embInfInf (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = x := by
  have h := congrArg (fun g => g x) (comp_embInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

end projInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

4

projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInf_succ_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conj_iInfTerm_eq
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm_monotone
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def projInfInf : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  ⋃ n, jInfTerm D₀ j₀ n

namespace projInfInf

theorem apply (f : DInf.fn D₀ j₀) :
    projInfInf D₀ j₀ f = ⋃ n, jInfTerm D₀ j₀ n f := by
  show (sSup (Set.range (jInfTerm D₀ j₀)) : ScottMap _ _) f = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (projInfInf D₀ j₀ : DInf.fn D₀ j₀ → DInf D₀ j₀) :=
  (proposition_2_5 _).mp (projInfInf D₀ j₀).continuous

theorem embInfInf_eq (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = ⋃ n, embInf (towerType D₀) (towerProj D₀ j₀)
    (n + 1) (x.1 (n + 1)) := by
  rw [apply]
  set g := fun n m =>
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
      (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
               (embInf (towerType D₀) (towerProj D₀ j₀) n)
               (iInfTerm D₀ j₀ m x)) with hg
  have hmono (n : ℕ) : Monotone (fun m =>
      conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (iInfTerm D₀ j₀ m x)) := fun a b hab =>
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
```

```
            (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
      (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab))
  have hinner (n : ℕ) : jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x) = ⋃ m, g n m := by
    calc jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)
        = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
            (⋃ m, conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                          (embInf (towerType D₀) (towerProj D₀ j₀) n)
                          (iInfTerm D₀ j₀ m x)) := by
          rw [jInfTerm.apply, embInfInf.apply,
            conjMap_iSup D₀ j₀ n (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀
    ) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (fun m => iInfTerm D₀ j₀ m x) (iInfTerm_monotone D₀ j₀ x)]
          rfl
      _ = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
              (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                       (embInf (towerType D₀) (towerProj D₀ j₀) n)
                       (iInfTerm D₀ j₀ m x)) :=
          embInf_succ_iSup D₀ j₀ n _ (hmono n)
      _ = ⋃ m, g n m := by simp only [hg]
  have g_mono_m (n : ℕ) : Monotone (g n) := by
    intro a b hab
    rw [hg]
    exact (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).monotone
      ((conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
        (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab)))
  have g_mono_n_succ (m n : ℕ) : g n m ≤ g (n + 1) m := by
    rw [hg]
    dsimp only
    rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n)
                 (iInfTerm D₀ j₀ m x))]
    exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 2)
      (conjMap_incl_le_conjMap_succ D₀ j₀ n (iInfTerm D₀ j₀ m x))
  have g_mono_n (m : ℕ) : Monotone (fun n => g n m) :=
    monotone_nat_of_le_succ (g_mono_n_succ m)
  have hin : (⋃ n, jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)) = ⋃ n, ⋃ m, g n m := by
    congr 1
    funext n
    exact hinner n
  rw [hin, iSup₂_monotone_eq_diagonal g g_mono_m g_mono_n]
  congr 1
  funext n
  rw [hg]
  dsimp only
  rw [conj_iInfTerm_eq D₀ j₀ n x]

theorem comp_embInfInf :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro x
  have hmono : Monotone (fun k => embInf (towerType D₀) (towerProj D₀ j₀) k (x.1 k)) :=
    monotone_nat_of_le_succ (embInf.le_succ (towerType D₀) (towerProj D₀ j₀) x)
  rw [ScottMap.comp_apply, ScottMap.idMap_apply, embInfInf_eq D₀ j₀ x,
```

```
    Monotone.iSup_nat_add hmono 1]
  exact (inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) x).symm

theorem embInfInf (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = x := by
  have h := congrArg (fun g => g x) (comp_embInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

end projInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

5

projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInf_succ_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conj_iInfTerm_eq
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm_monotone
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def projInfInf : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  ⋃ n, jInfTerm D₀ j₀ n

namespace projInfInf

theorem apply (f : DInf.fn D₀ j₀) :
    projInfInf D₀ j₀ f = ⋃ n, jInfTerm D₀ j₀ n f := by
  show (sSup (Set.range (jInfTerm D₀ j₀)) : ScottMap _ _) f = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl
```

```
theorem preservesDirectedSup :
    PreservesDirectedSup (projInfInf D₀ j₀ : DInf.fn D₀ j₀ → DInf D₀ j₀) :=
  (proposition_2_5 _).mp (projInfInf D₀ j₀).continuous

theorem embInfInf_eq (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = ⋃ n, embInf (towerType D₀) (towerProj D₀ j₀)
    (n + 1) (x.1 (n + 1)) := by
  rw [apply]
  set g := fun n m =>
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
      (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
               (embInf (towerType D₀) (towerProj D₀ j₀) n)
               (iInfTerm D₀ j₀ m x)) with hg
  have hmono (n : ℕ) : Monotone (fun m =>
      conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (iInfTerm D₀ j₀ m x)) := fun a b hab =>
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
      (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab))
  have hinner (n : ℕ) : jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x) = ⋃ m, g n m := by
    calc jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)
        = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
            (⋃ m, conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                          (embInf (towerType D₀) (towerProj D₀ j₀) n)
                          (iInfTerm D₀ j₀ m x)) := by
          rw [jInfTerm.apply, embInfInf.apply,
            conjMap_iSup D₀ j₀ n (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀
    ) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (fun m => iInfTerm D₀ j₀ m x) (iInfTerm_monotone D₀ j₀ x)]
          rfl
      _ = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
              (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                       (embInf (towerType D₀) (towerProj D₀ j₀) n)
                       (iInfTerm D₀ j₀ m x)) :=
          embInf_succ_iSup D₀ j₀ n _ (hmono n)
      _ = ⋃ m, g n m := by simp only [hg]
  have g_mono_m (n : ℕ) : Monotone (g n) := by
    intro a b hab
    rw [hg]
    exact (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).monotone
      ((conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
        (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab)))
  have g_mono_n_succ (m n : ℕ) : g n m ≤ g (n + 1) m := by
    rw [hg]
    dsimp only
    rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n)
                 (iInfTerm D₀ j₀ m x))]
    exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 2)
      (conjMap_incl_le_conjMap_succ D₀ j₀ n (iInfTerm D₀ j₀ m x))
  have g_mono_n (m : ℕ) : Monotone (fun n => g n m) :=
    monotone_nat_of_le_succ (g_mono_n_succ m)
```

```
  have hin : (⋃ n, jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)) = ⋃ n, ⋃ m, g n m := by
    congr 1
    funext n
    exact hinner n
  rw [hin, iSup₂_monotone_eq_diagonal g g_mono_m g_mono_n]
  congr 1
  funext n
  rw [hg]
  dsimp only
  rw [conj_iInfTerm_eq D₀ j₀ n x]

theorem comp_embInfInf :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro x
  have hmono : Monotone (fun k => embInf (towerType D₀) (towerProj D₀ j₀) k (x.1 k)) :=
    monotone_nat_of_le_succ (embInf.le_succ (towerType D₀) (towerProj D₀ j₀) x)
  rw [ScottMap.comp_apply, ScottMap.idMap_apply, embInfInf_eq D₀ j₀ x,
    Monotone.iSup_nat_add hmono 1]
  exact (inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) x).symm

theorem embInfInf (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = x := by
  have h := congrArg (fun g => g x) (comp_embInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

end projInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

6

projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInf_succ_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conj_iInfTerm_eq
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm_monotone
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice
```

```
attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def projInfInf : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  ⋃ n, jInfTerm D₀ j₀ n

namespace projInfInf

theorem apply (f : DInf.fn D₀ j₀) :
    projInfInf D₀ j₀ f = ⋃ n, jInfTerm D₀ j₀ n f := by
  show (sSup (Set.range (jInfTerm D₀ j₀)) : ScottMap _ _) f = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (projInfInf D₀ j₀ : DInf.fn D₀ j₀ → DInf D₀ j₀) :=
  (proposition_2_5 _).mp (projInfInf D₀ j₀).continuous

theorem embInfInf_eq (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = ⋃ n, embInf (towerType D₀) (towerProj D₀ j₀)
    (n + 1) (x.1 (n + 1)) := by
  rw [apply]
  set g := fun n m =>
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
      (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
               (embInf (towerType D₀) (towerProj D₀ j₀) n)
               (iInfTerm D₀ j₀ m x)) with hg
  have hmono (n : ℕ) : Monotone (fun m =>
      conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (iInfTerm D₀ j₀ m x)) := fun a b hab =>
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
      (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab))
  have hinner (n : ℕ) : jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x) = ⋃ m, g n m :=
    calc jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)
        = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
            (⋃ m, conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                          (embInf (towerType D₀) (towerProj D₀ j₀) n)
                          (iInfTerm D₀ j₀ m x)) := by
          rw [jInfTerm.apply, embInfInf.apply,
            conjMap_iSup D₀ j₀ n (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀
  ) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (fun m => iInfTerm D₀ j₀ m x) (iInfTerm_monotone D₀ j₀ x)]
          rfl
      _ = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
              (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                       (embInf (towerType D₀) (towerProj D₀ j₀) n)
                       (iInfTerm D₀ j₀ m x)) :=
          embInf_succ_iSup D₀ j₀ n _ (hmono n)
      _ = ⋃ m, g n m := by simp only [hg]
```

```
  have g_mono_m (n : ℕ) : Monotone (g n) := by
    intro a b hab
    rw [hg]
    exact (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).monotone
      ((conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
        (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab)))
  have g_mono_n_succ (m n : ℕ) : g n m ≤ g (n + 1) m := by
    rw [hg]
    dsimp only
    rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n)
                 (iInfTerm D₀ j₀ m x))]
    exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 2)
      (conjMap_incl_le_conjMap_succ D₀ j₀ n (iInfTerm D₀ j₀ m x))
  have g_mono_n (m : ℕ) : Monotone (fun n => g n m) :=
    monotone_nat_of_le_succ (g_mono_n_succ m)
  have hin : (⋃ n, jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)) = ⋃ n, ⋃ m, g n m := by
    congr 1
    funext n
    exact hinner n
  rw [hin, iSup₂_monotone_eq_diagonal g g_mono_m g_mono_n]
  congr 1
  funext n
  rw [hg]
  dsimp only
  rw [conj_iInfTerm_eq D₀ j₀ n x]

theorem comp_embInfInf :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro x
  have hmono : Monotone (fun k => embInf (towerType D₀) (towerProj D₀ j₀) k (x.1 k)) :=
    monotone_nat_of_le_succ (embInf.le_succ (towerType D₀) (towerProj D₀ j₀) x)
  rw [ScottMap.comp_apply, ScottMap.idMap_apply, embInfInf_eq D₀ j₀ x,
    Monotone.iSup_nat_add hmono 1]
  exact (inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) x).symm

theorem embInfInf (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = x := by
  have h := congrArg (fun g => g x) (comp_embInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

end projInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

7

projInfInf.lean

```
module
```

```
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInf_succ_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conj_iInfTerm_eq
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm_monotone
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def projInfInf : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  ⋃ n, jInfTerm D₀ j₀ n

namespace projInfInf

theorem apply (f : DInf.fn D₀ j₀) :
    projInfInf D₀ j₀ f = ⋃ n, jInfTerm D₀ j₀ n f := by
  show (sSup (Set.range (jInfTerm D₀ j₀)) : ScottMap _ _) f = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (projInfInf D₀ j₀ : DInf.fn D₀ j₀ → DInf D₀ j₀) :=
  (proposition_2_5 _).mp (projInfInf D₀ j₀).continuous

theorem embInfInf_eq (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = ⋃ n, embInf (towerType D₀) (towerProj D₀ j₀)
    (n + 1) (x.1 (n + 1)) := by
  rw [apply]
  set g := fun n m =>
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
      (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
               (embInf (towerType D₀) (towerProj D₀ j₀) n)
               (iInfTerm D₀ j₀ m x)) with hg
  have hmono (n : ℕ) : Monotone (fun m =>
      conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (iInfTerm D₀ j₀ m x)) := fun a b hab =>
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
      (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab))
```

```
  have hinner (n : ℕ) : jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x) = ⋃ m, g n m :=
    calc jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)
        = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
            (⋃ m, conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                          (embInf (towerType D₀) (towerProj D₀ j₀) n)
                          (iInfTerm D₀ j₀ m x)) := by
          rw [jInfTerm.apply, embInfInf.apply,
            conjMap_iSup D₀ j₀ n (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀
    ) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (fun m => iInfTerm D₀ j₀ m x) (iInfTerm_monotone D₀ j₀ x)]
          rfl
      _ = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
              (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                       (embInf (towerType D₀) (towerProj D₀ j₀) n)
                       (iInfTerm D₀ j₀ m x)) :=
          embInf_succ_iSup D₀ j₀ n _ (hmono n)
      _ = ⋃ m, g n m := by simp only [hg]
  have g_mono_m (n : ℕ) : Monotone (g n) := by
    intro a b hab
    rw [hg]
    exact (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).monotone
      ((conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
        (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab)))
  have g_mono_n_succ (m n : ℕ) : g n m ≤ g (n + 1) m := by
    rw [hg]
    dsimp only
    rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n)
                 (iInfTerm D₀ j₀ m x))]
    exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 2)
      (conjMap_incl_le_conjMap_succ D₀ j₀ n (iInfTerm D₀ j₀ m x))
  have g_mono_n (m : ℕ) : Monotone (fun n => g n m) :=
    monotone_nat_of_le_succ (g_mono_n_succ m)
  have hin : (⋃ n, jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)) = ⋃ n, ⋃ m, g n m := by
    congr 1
    funext n
    exact hinner n
  rw [hin, iSup₂_monotone_eq_diagonal g g_mono_m g_mono_n]
  congr 1
  funext n
  rw [hg]
  dsimp only
  rw [conj_iInfTerm_eq D₀ j₀ n x]

theorem comp_embInfInf :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro x
  have hmono : Monotone (fun k => embInf (towerType D₀) (towerProj D₀ j₀) k (x.1 k)) :=
    monotone_nat_of_le_succ (embInf.le_succ (towerType D₀) (towerProj D₀ j₀) x)
  rw [ScottMap.comp_apply, ScottMap.idMap_apply, embInfInf_eq D₀ j₀ x,
    Monotone.iSup_nat_add hmono 1]
  exact (inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) x).symm
```

```
theorem embInfInf (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = x := by
  have h := congrArg (fun g => g x) (comp_embInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

end projInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

8

projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.jInfTerm
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conjMap_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInf_succ_iSup
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.conj_iInfTerm_eq
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iInfTerm_monotone
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.ScottMaps.proposition_2_5
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def projInfInf : ScottMap (DInf.fn D₀ j₀) (DInf D₀ j₀) :=
  ⋃ n, jInfTerm D₀ j₀ n

namespace projInfInf

theorem apply (f : DInf.fn D₀ j₀) :
    projInfInf D₀ j₀ f = ⋃ n, jInfTerm D₀ j₀ n f := by
  show (sSup (Set.range (jInfTerm D₀ j₀)) : ScottMap _ _) f = _
  rw [ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

theorem preservesDirectedSup :
    PreservesDirectedSup (projInfInf D₀ j₀ : DInf.fn D₀ j₀ → DInf D₀ j₀) :=
```

```
  (proposition_2_5 _).mp (projInfInf D₀ j₀).continuous

theorem embInfInf_eq (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = ⋃ n, embInf (towerType D₀) (towerProj D₀ j₀)
    (n + 1) (x.1 (n + 1)) := by
  rw [apply]
  set g := fun n m =>
    embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
      (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
               (embInf (towerType D₀) (towerProj D₀ j₀) n)
               (iInfTerm D₀ j₀ m x)) with hg
  have hmono (n : ℕ) : Monotone (fun m =>
      conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (iInfTerm D₀ j₀ m x)) := fun a b hab =>
    (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
             (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
      (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab))
  have hinner (n : ℕ) : jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x) = ⋃ m, g n m := by
    calc jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)
        = embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
            (⋃ m, conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                          (embInf (towerType D₀) (towerProj D₀ j₀) n)
                          (iInfTerm D₀ j₀ m x)) := by
          rw [jInfTerm.apply, embInfInf.apply,
            conjMap_iSup D₀ j₀ n (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀
  ) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n)
              (fun m => iInfTerm D₀ j₀ m x) (iInfTerm_monotone D₀ j₀ x)]
          rfl
      _ = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)
              (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                       (embInf (towerType D₀) (towerProj D₀ j₀) n)
                       (iInfTerm D₀ j₀ m x)) :=
          embInf_succ_iSup D₀ j₀ n _ (hmono n)
      _ = ⋃ m, g n m := by simp only [hg]
  have g_mono_m (n : ℕ) : Monotone (g n) := by
    intro a b hab
    rw [hg]
    exact (embInf (towerType D₀) (towerProj D₀ j₀) (n + 1)).monotone
      ((conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n)).monotone
        (ScottMap.le_def.mpr (iInfTerm_monotone D₀ j₀ x hab)))
  have g_mono_n_succ (m n : ℕ) : g n m ≤ g (n + 1) m := by
    rw [hg]
    dsimp only
    rw [← embInf.succ (towerType D₀) (towerProj D₀ j₀) (n + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                 (embInf (towerType D₀) (towerProj D₀ j₀) n)
                 (iInfTerm D₀ j₀ m x))]
    exact embInf.monotone (towerType D₀) (towerProj D₀ j₀) (n + 2)
      (conjMap_incl_le_conjMap_succ D₀ j₀ n (iInfTerm D₀ j₀ m x))
  have g_mono_n (m : ℕ) : Monotone (fun n => g n m) :=
    monotone_nat_of_le_succ (g_mono_n_succ m)
  have hin : (⋃ n, jInfTerm D₀ j₀ n (embInfInf D₀ j₀ x)) = ⋃ n, ⋃ m, g n m := by
    congr 1
```

```
    funext n
    exact hinner n
  rw [hin, iSup₂_monotone_eq_diagonal g g_mono_m g_mono_n]
  congr 1
  funext n
  rw [hg]
  dsimp only
  rw [conj_iInfTerm_eq D₀ j₀ n x]

theorem comp_embInfInf :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro x
  have hmono : Monotone (fun k => embInf (towerType D₀) (towerProj D₀ j₀) k (x.1 k)) :=
    monotone_nat_of_le_succ (embInf.le_succ (towerType D₀) (towerProj D₀ j₀) x)
  rw [ScottMap.comp_apply, ScottMap.idMap_apply, embInfInf_eq D₀ j₀ x,
    Monotone.iSup_nat_add hmono 1]
  exact (inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) x).symm

theorem embInfInf (x : DInf D₀ j₀) :
    projInfInf D₀ j₀ (embInfInf D₀ j₀ x) = x := by
  have h := congrArg (fun g => g x) (comp_embInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

end projInfInf

end LimitMaps

end DomainTheory.ContinuousLattice
```

9

embInfInf_projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    towerProj_retr_conjMap_succ
public import DomainTheory.ContinuousLattice.InverseLimits.lemma_4_5
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps
```

```
variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInfInf_comp_projInfInf :
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro f
  rw [ScottMap.comp_apply, ScottMap.idMap_apply]
  apply ScottMap.ext
  intro z

  set r : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀) :=
    fun n => (embInf (towerType D₀) (towerProj D₀ j₀) n).comp
               (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) with hr
  have hrw : ∀ n (w : DInf D₀ j₀), r n w
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w) := by
    intro n w
    simp only [hr, ScottMap.comp_apply]
  have hr_mono : ∀ (w : DInf D₀ j₀), Monotone (fun m => r m w) := by
    intro w
    refine monotone_nat_of_le_succ (fun m => ?_)
    show r m w ≤ r (m + 1) w
    rw [hrw, hrw]
    exact embInf.le_succ (towerType D₀) (towerProj D₀ j₀) w m

  have hA : ∀ (w : DInf D₀ j₀), w = ⋃ m, r m w := by
    intro w
    have h1 : (⋃ m, r m w)
        = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) m
                 (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m w) :=
      iSup_congr (fun m => hrw m w)
    rw [h1]
    exact inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) w

  have hsup_apply : ∀ (g : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (w : DInf D₀ j₀),
      (⋃ n, g n) w = ⋃ n, g n w := by
    intro g w
    rw [show (⋃ n, g n) = sSup (Set.range g) from sSup_range.symm,
      ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
    rfl

  have hcont : ∀ (g : ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (a : ℕ → DInf D₀ j₀),
      Monotone a → g (⋃ m, a m) = ⋃ m, g (a m) := by
    intro g a ha
    have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
      directedOn_range.2 fun i j => ⟨max i j, ha (le_max_left i j), ha (le_max_right i
    j)⟩
    rw [show (⋃ m, a m) = sSup (Set.range a) from sSup_range.symm,
      g.preservesDirectedSup_coe (Set.range a) (Set.range_nonempty a) hdir,
      ← Set.range_comp, sSup_range]
    rfl

  have hpi : projInfInf D₀ j₀ f
      = ⋃ k, embInf (towerType D₀) (towerProj D₀ j₀) (k + 1)
          (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
```

```
                  (embInf (towerType D₀) (towerProj D₀ j₀) k) f) := by
    rw [projInfInf.apply]
    exact iSup_congr (fun n => jInfTerm.apply D₀ j₀ n f)

  have hcoord : ∀ n, (projInfInf D₀ j₀ f).1 (n + 1)
      = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
    intro n
    rw [hpi]
    exact lemma_4_5 (towerType D₀) (towerProj D₀ j₀)
      (fun k => conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                        (embInf (towerType D₀) (towerProj D₀ j₀) k) f)
      (fun m => towerProj_retr_conjMap_succ D₀ j₀ m f) n

  have hev : embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
      = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := by
    rw [embInfInf.apply]
    exact hsup_apply (fun n => iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z

  have hterm : ∀ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z = r n (f (r n z)) := by
    intro n
    rw [hrw, hrw, iInfTerm.apply, hcoord n]
    rfl
  have hmono_frz : Monotone (fun m => f (r m z)) :=
    fun a b hab => f.monotone (hr_mono z hab)
  have hfm : ∀ n, Monotone (fun m => r n (f (r m z))) :=
    fun n _ _ hab => (r n).monotone (f.monotone (hr_mono z hab))
  have hfn : ∀ m, Monotone (fun n => r n (f (r m z))) :=
    fun m => hr_mono (f (r m z))

  have hfz : f z = ⋃ n, r n (f (r n z)) :=
    calc f z = ⋃ k, r k (f z) := hA (f z)
      _ = ⋃ k, r k (f (⋃ m, r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [← hA z]
      _ = ⋃ k, r k (⋃ m, f (r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [hcont f (fun m => r m z) (hr_mono z)]
      _ = ⋃ k, ⋃ m, r k (f (r m z)) :=
            iSup_congr (fun k => hcont (r k) (fun m => f (r m z)) hmono_frz)
      _ = ⋃ n, r n (f (r n z)) :=
            iSup₂_monotone_eq_diagonal (fun n m => r n (f (r m z))) hfm hfn
  calc embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
      = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := hev
    _ = ⋃ n, r n (f (r n z)) := iSup_congr hterm
    _ = f z := hfz.symm

theorem embInfInf_projInfInf (f : DInf.fn D₀ j₀) :
    embInfInf D₀ j₀ (projInfInf D₀ j₀ f) = f := by
  have h := congrArg (fun g => g f) (embInfInf_comp_projInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

theorem embInfInf_le_iff (x y : DInf D₀ j₀) :
    embInfInf D₀ j₀ x ≤ embInfInf D₀ j₀ y ↔ x ≤ y := by
  constructor
  · intro h
```

```
    have := (projInfInf D₀ j₀).monotone h
    rwa [projInfInf.embInfInf, projInfInf.embInfInf] at this
  · intro h; exact (embInfInf D₀ j₀).monotone h

end LimitMaps

end DomainTheory.ContinuousLattice
```

0

embInfInf_projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    towerProj_retr_conjMap_succ
public import DomainTheory.ContinuousLattice.InverseLimits.lemma_4_5
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInfInf_comp_projInfInf :
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro f
  rw [ScottMap.comp_apply, ScottMap.idMap_apply]
  apply ScottMap.ext
  intro z

  set r : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀) :=
    fun n => (embInf (towerType D₀) (towerProj D₀ j₀) n).comp
               (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) with hr
  have hrw : ∀ n (w : DInf D₀ j₀), r n w
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w) := by
    intro n w
    simp only [hr, ScottMap.comp_apply]
  have hr_mono : ∀ (w : DInf D₀ j₀), Monotone (fun m => r m w) := by
    intro w
    refine monotone_nat_of_le_succ (fun m => ?_)
```

```
  show r m w ≤ r (m + 1) w
  rw [hrw, hrw]
  exact embInf.le_succ (towerType D₀) (towerProj D₀ j₀) w m

have hA : ∀ (w : DInf D₀ j₀), w = ⋃ m, r m w := by
  intro w
  have h1 : (⋃ m, r m w)
      = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) m
               (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m w) :=
    iSup_congr (fun m => hrw m w)
  rw [h1]
  exact inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) w

have hsup_apply : ∀ (g : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (w : DInf D₀ j₀),
    (⋃ n, g n) w = ⋃ n, g n w := by
  intro g w
  rw [show (⋃ n, g n) = sSup (Set.range g) from sSup_range.symm,
    ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

have hcont : ∀ (g : ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (a : ℕ → DInf D₀ j₀),
    Monotone a → g (⋃ m, a m) = ⋃ m, g (a m) := by
  intro g a ha
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 fun i j => ⟨max i j, ha (le_max_left i j), ha (le_max_right i
  j)⟩
  rw [show (⋃ m, a m) = sSup (Set.range a) from sSup_range.symm,
    g.preservesDirectedSup_coe (Set.range a) (Set.range_nonempty a) hdir,
    ← Set.range_comp, sSup_range]
  rfl

have hpi : projInfInf D₀ j₀ f
    = ⋃ k, embInf (towerType D₀) (towerProj D₀ j₀) (k + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                 (embInf (towerType D₀) (towerProj D₀ j₀) k) f) := by
  rw [projInfInf.apply]
  exact iSup_congr (fun n => jInfTerm.apply D₀ j₀ n f)

have hcoord : ∀ n, (projInfInf D₀ j₀ f).1 (n + 1)
    = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  intro n
  rw [hpi]
  exact lemma_4_5 (towerType D₀) (towerProj D₀ j₀)
    (fun k => conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                      (embInf (towerType D₀) (towerProj D₀ j₀) k) f)
    (fun m => towerProj_retr_conjMap_succ D₀ j₀ m f) n

have hev : embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
    = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := by
  rw [embInfInf.apply]
  exact hsup_apply (fun n => iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z

have hterm : ∀ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z = r n (f (r n z)) := by
  intro n
  rw [hrw, hrw, iInfTerm.apply, hcoord n]
```

```
    rfl
  have hmono_frz : Monotone (fun m => f (r m z)) :=
    fun a b hab => f.monotone (hr_mono z hab)
  have hfm : ∀ n, Monotone (fun m => r n (f (r m z))) :=
    fun n _ _ hab => (r n).monotone (f.monotone (hr_mono z hab))
  have hfn : ∀ m, Monotone (fun n => r n (f (r m z))) :=
    fun m => hr_mono (f (r m z))

  have hfz : f z = ⋃ n, r n (f (r n z)) :=
    calc f z = ⋃ k, r k (f z) := hA (f z)
      _ = ⋃ k, r k (f (⋃ m, r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [← hA z]
      _ = ⋃ k, r k (⋃ m, f (r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [hcont f (fun m => r m z) (hr_mono z)]
      _ = ⋃ k, ⋃ m, r k (f (r m z)) :=
            iSup_congr (fun k => hcont (r k) (fun m => f (r m z)) hmono_frz)
      _ = ⋃ n, r n (f (r n z)) :=
            iSup₂_monotone_eq_diagonal (fun n m => r n (f (r m z))) hfm hfn
  calc embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
      = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := hev
    _ = ⋃ n, r n (f (r n z)) := iSup_congr hterm
    _ = f z := hfz.symm

theorem embInfInf_projInfInf (f : DInf.fn D₀ j₀) :
    embInfInf D₀ j₀ (projInfInf D₀ j₀ f) = f := by
  have h := congrArg (fun g => g f) (embInfInf_comp_projInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

theorem embInfInf_le_iff (x y : DInf D₀ j₀) :
    embInfInf D₀ j₀ x ≤ embInfInf D₀ j₀ y ↔ x ≤ y := by
  constructor
  · intro h
    have := (projInfInf D₀ j₀).monotone h
    rwa [projInfInf.embInfInf, projInfInf.embInfInf] at this
  · intro h; exact (embInfInf D₀ j₀).monotone h

end LimitMaps

end DomainTheory.ContinuousLattice
```

1

embInfInf_projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    towerProj_retr_conjMap_succ
public import DomainTheory.ContinuousLattice.InverseLimits.lemma_4_5
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
```

```
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInfInf_comp_projInfInf :
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro f
  rw [ScottMap.comp_apply, ScottMap.idMap_apply]
  apply ScottMap.ext
  intro z

  set r : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀) :=
    fun n => (embInf (towerType D₀) (towerProj D₀ j₀) n).comp
               (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) with hr
  have hrw : ∀ n (w : DInf D₀ j₀), r n w
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w) := by
    intro n w
    simp only [hr, ScottMap.comp_apply]
  have hr_mono : ∀ (w : DInf D₀ j₀), Monotone (fun m => r m w) := by
    intro w
    refine monotone_nat_of_le_succ (fun m => ?_)
    show r m w ≤ r (m + 1) w
    rw [hrw, hrw]
    exact embInf.le_succ (towerType D₀) (towerProj D₀ j₀) w m

  have hA : ∀ (w : DInf D₀ j₀), w = ⋃ m, r m w := by
    intro w
    have h1 : (⋃ m, r m w)
        = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) m
                 (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m w) :=
      iSup_congr (fun m => hrw m w)
    rw [h1]
    exact inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) w

  have hsup_apply : ∀ (g : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (w : DInf D₀ j₀),
      (⋃ n, g n) w = ⋃ n, g n w := by
    intro g w
    rw [show (⋃ n, g n) = sSup (Set.range g) from sSup_range.symm,
      ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
    rfl

  have hcont : ∀ (g : ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (a : ℕ → DInf D₀ j₀),
      Monotone a → g (⋃ m, a m) = ⋃ m, g (a m) := by
```

```
  intro g a ha
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 fun i j => ⟨max i j, ha (le_max_left i j), ha (le_max_right i
  j)⟩
  rw [show (⋃ m, a m) = sSup (Set.range a) from sSup_range.symm,
    g.preservesDirectedSup_coe (Set.range a) (Set.range_nonempty a) hdir,
    ← Set.range_comp, sSup_range]
  rfl

have hpi : projInfInf D₀ j₀ f
    = ⋃ k, embInf (towerType D₀) (towerProj D₀ j₀) (k + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                 (embInf (towerType D₀) (towerProj D₀ j₀) k) f) := by
  rw [projInfInf.apply]
  exact iSup_congr (fun n => jInfTerm.apply D₀ j₀ n f)

have hcoord : ∀ n, (projInfInf D₀ j₀ f).1 (n + 1)
    = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  intro n
  rw [hpi]
  exact lemma_4_5 (towerType D₀) (towerProj D₀ j₀)
    (fun k => conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                      (embInf (towerType D₀) (towerProj D₀ j₀) k) f)
    (fun m => towerProj_retr_conjMap_succ D₀ j₀ m f) n

have hev : embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
    = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := by
  rw [embInfInf.apply]
  exact hsup_apply (fun n => iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z

have hterm : ∀ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z = r n (f (r n z)) := by
  intro n
  rw [hrw, hrw, iInfTerm.apply, hcoord n]
  rfl
have hmono_frz : Monotone (fun m => f (r m z)) :=
  fun a b hab => f.monotone (hr_mono z hab)
have hfm : ∀ n, Monotone (fun m => r n (f (r m z))) :=
  fun n _ _ hab => (r n).monotone (f.monotone (hr_mono z hab))
have hfn : ∀ m, Monotone (fun n => r n (f (r m z))) :=
  fun m => hr_mono (f (r m z))

have hfz : f z = ⋃ n, r n (f (r n z)) :=
  calc f z = ⋃ k, r k (f z) := hA (f z)
    _ = ⋃ k, r k (f (⋃ m, r m z)) := by
          refine iSup_congr (fun k => ?_)
          rw [← hA z]
    _ = ⋃ k, r k (⋃ m, f (r m z)) := by
          refine iSup_congr (fun k => ?_)
          rw [hcont f (fun m => r m z) (hr_mono z)]
    _ = ⋃ k, ⋃ m, r k (f (r m z)) :=
          iSup_congr (fun k => hcont (r k) (fun m => f (r m z)) hmono_frz)
    _ = ⋃ n, r n (f (r n z)) :=
          iSup₂_monotone_eq_diagonal (fun n m => r n (f (r m z))) hfm hfn
calc embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
    = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := hev
```

```
    _ = ⋃ n, r n (f (r n z)) := iSup_congr hterm
    _ = f z := hfz.symm

theorem embInfInf_projInfInf (f : DInf.fn D₀ j₀) :
    embInfInf D₀ j₀ (projInfInf D₀ j₀ f) = f := by
  have h := congrArg (fun g => g f) (embInfInf_comp_projInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

theorem embInfInf_le_iff (x y : DInf D₀ j₀) :
    embInfInf D₀ j₀ x ≤ embInfInf D₀ j₀ y ↔ x ≤ y := by
  constructor
  · intro h
    have := (projInfInf D₀ j₀).monotone h
    rwa [projInfInf.embInfInf, projInfInf.embInfInf] at this
  · intro h; exact (embInfInf D₀ j₀).monotone h

end LimitMaps

end DomainTheory.ContinuousLattice
```

2

embInfInf_projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    towerProj_retr_conjMap_succ
public import DomainTheory.ContinuousLattice.InverseLimits.lemma_4_5
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInfInf_comp_projInfInf :
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro f
  rw [ScottMap.comp_apply, ScottMap.idMap_apply]
  apply ScottMap.ext
  intro z
```

```
set r : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀) :=
  fun n => (embInf (towerType D₀) (towerProj D₀ j₀) n).comp
            (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) with hr
have hrw : ∀ n (w : DInf D₀ j₀), r n w
    = embInf (towerType D₀) (towerProj D₀ j₀) n
        (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w) := by
  intro n w
  simp only [hr, ScottMap.comp_apply]
have hr_mono : ∀ (w : DInf D₀ j₀), Monotone (fun m => r m w) := by
  intro w
  refine monotone_nat_of_le_succ (fun m => ?_)
  show r m w ≤ r (m + 1) w
  rw [hrw, hrw]
  exact embInf.le_succ (towerType D₀) (towerProj D₀ j₀) w m

have hA : ∀ (w : DInf D₀ j₀), w = ⋃ m, r m w := by
  intro w
  have h1 : (⋃ m, r m w)
      = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) m
               (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m w) :=
    iSup_congr (fun m => hrw m w)
  rw [h1]
  exact inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) w

have hsup_apply : ∀ (g : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (w : DInf D₀ j₀),
    (⋃ n, g n) w = ⋃ n, g n w := by
  intro g w
  rw [show (⋃ n, g n) = sSup (Set.range g) from sSup_range.symm,
    ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

have hcont : ∀ (g : ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (a : ℕ → DInf D₀ j₀),
    Monotone a → g (⋃ m, a m) = ⋃ m, g (a m) := by
  intro g a ha
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 fun i j => ⟨max i j, ha (le_max_left i j), ha (le_max_right i
  j)⟩
  rw [show (⋃ m, a m) = sSup (Set.range a) from sSup_range.symm,
    g.preservesDirectedSup_coe (Set.range a) (Set.range_nonempty a) hdir,
    ← Set.range_comp, sSup_range]
  rfl

have hpi : projInfInf D₀ j₀ f
    = ⋃ k, embInf (towerType D₀) (towerProj D₀ j₀) (k + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                 (embInf (towerType D₀) (towerProj D₀ j₀) k) f) := by
  rw [projInfInf.apply]
  exact iSup_congr (fun n => jInfTerm.apply D₀ j₀ n f)

have hcoord : ∀ n, (projInfInf D₀ j₀ f).1 (n + 1)
    = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  intro n
  rw [hpi]
  exact lemma_4_5 (towerType D₀) (towerProj D₀ j₀)
```

```
      (fun k => conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                        (embInf (towerType D₀) (towerProj D₀ j₀) k) f)
      (fun m => towerProj_retr_conjMap_succ D₀ j₀ m f) n

  have hev : embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
      = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := by
    rw [embInfInf.apply]
    exact hsup_apply (fun n => iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z

  have hterm : ∀ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z = r n (f (r n z)) := by
    intro n
    rw [hrw, hrw, iInfTerm.apply, hcoord n]
    rfl
  have hmono_frz : Monotone (fun m => f (r m z)) :=
    fun a b hab => f.monotone (hr_mono z hab)
  have hfm : ∀ n, Monotone (fun m => r n (f (r m z))) :=
    fun n _ _ hab => (r n).monotone (f.monotone (hr_mono z hab))
  have hfn : ∀ m, Monotone (fun n => r n (f (r m z))) :=
    fun m => hr_mono (f (r m z))

  have hfz : f z = ⋃ n, r n (f (r n z)) :=
    calc f z = ⋃ k, r k (f z) := hA (f z)
      _ = ⋃ k, r k (f (⋃ m, r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [← hA z]
      _ = ⋃ k, r k (⋃ m, f (r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [hcont f (fun m => r m z) (hr_mono z)]
      _ = ⋃ k, ⋃ m, r k (f (r m z)) :=
            iSup_congr (fun k => hcont (r k) (fun m => f (r m z)) hmono_frz)
      _ = ⋃ n, r n (f (r n z)) :=
            iSup₂_monotone_eq_diagonal (fun n m => r n (f (r m z))) hfm hfn
  calc embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
      = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := hev
    _ = ⋃ n, r n (f (r n z)) := iSup_congr hterm
    _ = f z := hfz.symm

theorem embInfInf_projInfInf (f : DInf.fn D₀ j₀) :
    embInfInf D₀ j₀ (projInfInf D₀ j₀ f) = f := by
  have h := congrArg (fun g => g f) (embInfInf_comp_projInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

theorem embInfInf_le_iff (x y : DInf D₀ j₀) :
    embInfInf D₀ j₀ x ≤ embInfInf D₀ j₀ y ↔ x ≤ y := by
  constructor
  · intro h
    have := (projInfInf D₀ j₀).monotone h
    rwa [projInfInf.embInfInf, projInfInf.embInfInf] at this
  · intro h; exact (embInfInf D₀ j₀).monotone h

end LimitMaps

end DomainTheory.ContinuousLattice
```

embInfInf_projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    towerProj_retr_conjMap_succ
public import DomainTheory.ContinuousLattice.InverseLimits.lemma_4_5
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInfInf_comp_projInfInf :
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro f
  rw [ScottMap.comp_apply, ScottMap.idMap_apply]
  apply ScottMap.ext
  intro z

  set r : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀) :=
    fun n => (embInf (towerType D₀) (towerProj D₀ j₀) n).comp
               (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) with hr
  have hrw : ∀ n (w : DInf D₀ j₀), r n w
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w) := by
    intro n w
    simp only [hr, ScottMap.comp_apply]
  have hr_mono : ∀ (w : DInf D₀ j₀), Monotone (fun m => r m w) := by
    intro w
    refine monotone_nat_of_le_succ (fun m => ?_)
    show r m w ≤ r (m + 1) w
    rw [hrw, hrw]
    exact embInf.le_succ (towerType D₀) (towerProj D₀ j₀) w m

  have hA : ∀ (w : DInf D₀ j₀), w = ⋃ m, r m w := by
    intro w
    have h1 : (⋃ m, r m w)
        = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) m
                 (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m w) :=
      iSup_congr (fun m => hrw m w)
```

```
  rw [h1]
  exact inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) w

have hsup_apply : ∀ (g : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (w : DInf D₀ j₀),
    (⋃ n, g n) w = ⋃ n, g n w := by
  intro g w
  rw [show (⋃ n, g n) = sSup (Set.range g) from sSup_range.symm,
    ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

have hcont : ∀ (g : ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (a : ℕ → DInf D₀ j₀),
    Monotone a → g (⋃ m, a m) = ⋃ m, g (a m) := by
  intro g a ha
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 fun i j => ⟨max i j, ha (le_max_left i j), ha (le_max_right i
  j)⟩
  rw [show (⋃ m, a m) = sSup (Set.range a) from sSup_range.symm,
    g.preservesDirectedSup_coe (Set.range a) (Set.range_nonempty a) hdir,
    ← Set.range_comp, sSup_range]
  rfl

have hpi : projInfInf D₀ j₀ f
    = ⋃ k, embInf (towerType D₀) (towerProj D₀ j₀) (k + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                 (embInf (towerType D₀) (towerProj D₀ j₀) k) f) := by
  rw [projInfInf.apply]
  exact iSup_congr (fun n => jInfTerm.apply D₀ j₀ n f)

have hcoord : ∀ n, (projInfInf D₀ j₀ f).1 (n + 1)
    = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  intro n
  rw [hpi]
  exact lemma_4_5 (towerType D₀) (towerProj D₀ j₀)
    (fun k => conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                      (embInf (towerType D₀) (towerProj D₀ j₀) k) f)
    (fun m => towerProj_retr_conjMap_succ D₀ j₀ m f) n

have hev : embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
    = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := by
  rw [embInfInf.apply]
  exact hsup_apply (fun n => iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z

have hterm : ∀ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z = r n (f (r n z)) := by
  intro n
  rw [hrw, hrw, iInfTerm.apply, hcoord n]
  rfl
have hmono_frz : Monotone (fun m => f (r m z)) :=
  fun a b hab => f.monotone (hr_mono z hab)
have hfm : ∀ n, Monotone (fun m => r n (f (r m z))) :=
  fun n _ _ hab => (r n).monotone (f.monotone (hr_mono z hab))
have hfn : ∀ m, Monotone (fun n => r n (f (r m z))) :=
  fun m => hr_mono (f (r m z))

have hfz : f z = ⋃ n, r n (f (r n z)) :=
  calc f z = ⋃ k, r k (f z) := hA (f z)
```

```
      _ = ⋃ k, r k (f (⋃ m, r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [← hA z]
      _ = ⋃ k, r k (⋃ m, f (r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [hcont f (fun m => r m z) (hr_mono z)]
      _ = ⋃ k, ⋃ m, r k (f (r m z)) :=
            iSup_congr (fun k => hcont (r k) (fun m => f (r m z)) hmono_frz)
      _ = ⋃ n, r n (f (r n z)) :=
            iSup₂_monotone_eq_diagonal (fun n m => r n (f (r m z))) hfm hfn
  calc embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
      = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := hev
    _ = ⋃ n, r n (f (r n z)) := iSup_congr hterm
    _ = f z := hfz.symm

theorem embInfInf_projInfInf (f : DInf.fn D₀ j₀) :
    embInfInf D₀ j₀ (projInfInf D₀ j₀ f) = f := by
  have h := congrArg (fun g => g f) (embInfInf_comp_projInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

theorem embInfInf_le_iff (x y : DInf D₀ j₀) :
    embInfInf D₀ j₀ x ≤ embInfInf D₀ j₀ y ↔ x ≤ y := by
  constructor
  · intro h
    have := (projInfInf D₀ j₀).monotone h
    rwa [projInfInf.embInfInf, projInfInf.embInfInf] at this
  · intro h; exact (embInfInf D₀ j₀).monotone h

end LimitMaps

end DomainTheory.ContinuousLattice
```

4

embInfInf_projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    towerProj_retr_conjMap_succ
public import DomainTheory.ContinuousLattice.InverseLimits.lemma_4_5
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str
```

```
section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInfInf_comp_projInfInf :
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro f
  rw [ScottMap.comp_apply, ScottMap.idMap_apply]
  apply ScottMap.ext
  intro z

  set r : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀) :=
    fun n => (embInf (towerType D₀) (towerProj D₀ j₀) n).comp
               (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) with hr
  have hrw : ∀ n (w : DInf D₀ j₀), r n w
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w) := by
    intro n w
    simp only [hr, ScottMap.comp_apply]
  have hr_mono : ∀ (w : DInf D₀ j₀), Monotone (fun m => r m w) := by
    intro w
    refine monotone_nat_of_le_succ (fun m => ?_)
    show r m w ≤ r (m + 1) w
    rw [hrw, hrw]
    exact embInf.le_succ (towerType D₀) (towerProj D₀ j₀) w m

  have hA : ∀ (w : DInf D₀ j₀), w = ⋃ m, r m w := by
    intro w
    have h1 : (⋃ m, r m w)
        = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) m
                 (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m w) :=
      iSup_congr (fun m => hrw m w)
    rw [h1]
    exact inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) w

  have hsup_apply : ∀ (g : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (w : DInf D₀ j₀),
      (⋃ n, g n) w = ⋃ n, g n w := by
    intro g w
    rw [show (⋃ n, g n) = sSup (Set.range g) from sSup_range.symm,
      ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
    rfl

  have hcont : ∀ (g : ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (a : ℕ → DInf D₀ j₀),
      Monotone a → g (⋃ m, a m) = ⋃ m, g (a m) := by
    intro g a ha
    have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
      directedOn_range.2 fun i j => ⟨max i j, ha (le_max_left i j), ha (le_max_right i
    j)⟩
    rw [show (⋃ m, a m) = sSup (Set.range a) from sSup_range.symm,
      g.preservesDirectedSup_coe (Set.range a) (Set.range_nonempty a) hdir,
      ← Set.range_comp, sSup_range]
    rfl

  have hpi : projInfInf D₀ j₀ f
```

```
      = ⋃ k, embInf (towerType D₀) (towerProj D₀ j₀) (k + 1)
          (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                   (embInf (towerType D₀) (towerProj D₀ j₀) k) f) := by
    rw [projInfInf.apply]
    exact iSup_congr (fun n => jInfTerm.apply D₀ j₀ n f)

  have hcoord : ∀ n, (projInfInf D₀ j₀ f).1 (n + 1)
      = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
                (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
    intro n
    rw [hpi]
    exact lemma_4_5 (towerType D₀) (towerProj D₀ j₀)
      (fun k => conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                        (embInf (towerType D₀) (towerProj D₀ j₀) k) f)
      (fun m => towerProj_retr_conjMap_succ D₀ j₀ m f) n

  have hev : embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
      = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := by
    rw [embInfInf.apply]
    exact hsup_apply (fun n => iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z

  have hterm : ∀ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z = r n (f (r n z)) := by
    intro n
    rw [hrw, hrw, iInfTerm.apply, hcoord n]
    rfl
  have hmono_frz : Monotone (fun m => f (r m z)) :=
    fun a b hab => f.monotone (hr_mono z hab)
  have hfm : ∀ n, Monotone (fun m => r n (f (r m z))) :=
    fun n _ _ hab => (r n).monotone (f.monotone (hr_mono z hab))
  have hfn : ∀ m, Monotone (fun n => r n (f (r m z))) :=
    fun m => hr_mono (f (r m z))

  have hfz : f z = ⋃ n, r n (f (r n z)) :=
    calc f z = ⋃ k, r k (f z) := hA (f z)
      _ = ⋃ k, r k (f (⋃ m, r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [← hA z]
      _ = ⋃ k, r k (⋃ m, f (r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [hcont f (fun m => r m z) (hr_mono z)]
      _ = ⋃ k, ⋃ m, r k (f (r m z)) :=
            iSup_congr (fun k => hcont (r k) (fun m => f (r m z)) hmono_frz)
      _ = ⋃ n, r n (f (r n z)) :=
            iSup₂_monotone_eq_diagonal (fun n m => r n (f (r m z))) hfm hfn
  calc embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
      = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := hev
    _ = ⋃ n, r n (f (r n z)) := iSup_congr hterm
    _ = f z := hfz.symm

theorem embInfInf_projInfInf (f : DInf.fn D₀ j₀) :
    embInfInf D₀ j₀ (projInfInf D₀ j₀ f) = f := by
  have h := congrArg (fun g => g f) (embInfInf_comp_projInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

theorem embInfInf_le_iff (x y : DInf D₀ j₀) :
    embInfInf D₀ j₀ x ≤ embInfInf D₀ j₀ y ↔ x ≤ y := by
```

```
  constructor
  · intro h
    have := (projInfInf D₀ j₀).monotone h
    rwa [projInfInf.embInfInf, projInfInf.embInfInf] at this
  · intro h; exact (embInfInf D₀ j₀).monotone h

end LimitMaps

end DomainTheory.ContinuousLattice
```

5

embInfInf_projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    towerProj_retr_conjMap_succ
public import DomainTheory.ContinuousLattice.InverseLimits.lemma_4_5
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInfInf_comp_projInfInf :
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro f
  rw [ScottMap.comp_apply, ScottMap.idMap_apply]
  apply ScottMap.ext
  intro z

  set r : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀) :=
    fun n => (embInf (towerType D₀) (towerProj D₀ j₀) n).comp
               (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) with hr
  have hrw : ∀ n (w : DInf D₀ j₀), r n w
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w) := by
    intro n w
    simp only [hr, ScottMap.comp_apply]
  have hr_mono : ∀ (w : DInf D₀ j₀), Monotone (fun m => r m w) := by
```

```
  intro w
  refine monotone_nat_of_le_succ (fun m => ?_)
  show r m w ≤ r (m + 1) w
  rw [hrw, hrw]
  exact embInf.le_succ (towerType D₀) (towerProj D₀ j₀) w m

have hA : ∀ (w : DInf D₀ j₀), w = ⋃ m, r m w := by
  intro w
  have h1 : (⋃ m, r m w)
      = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) m
               (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m w) :=
    iSup_congr (fun m => hrw m w)
  rw [h1]
  exact inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) w

have hsup_apply : ∀ (g : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (w : DInf D₀ j₀),
    (⋃ n, g n) w = ⋃ n, g n w := by
  intro g w
  rw [show (⋃ n, g n) = sSup (Set.range g) from sSup_range.symm,
    ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

have hcont : ∀ (g : ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (a : ℕ → DInf D₀ j₀),
    Monotone a → g (⋃ m, a m) = ⋃ m, g (a m) := by
  intro g a ha
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 fun i j => ⟨max i j, ha (le_max_left i j), ha (le_max_right i
  j)⟩
  rw [show (⋃ m, a m) = sSup (Set.range a) from sSup_range.symm,
    g.preservesDirectedSup_coe (Set.range a) (Set.range_nonempty a) hdir,
    ← Set.range_comp, sSup_range]
  rfl

have hpi : projInfInf D₀ j₀ f
    = ⋃ k, embInf (towerType D₀) (towerProj D₀ j₀) (k + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                 (embInf (towerType D₀) (towerProj D₀ j₀) k) f) := by
  rw [projInfInf.apply]
  exact iSup_congr (fun n => jInfTerm.apply D₀ j₀ n f)

have hcoord : ∀ n, (projInfInf D₀ j₀ f).1 (n + 1)
    = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  intro n
  rw [hpi]
  exact lemma_4_5 (towerType D₀) (towerProj D₀ j₀)
    (fun k => conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                      (embInf (towerType D₀) (towerProj D₀ j₀) k) f)
    (fun m => towerProj_retr_conjMap_succ D₀ j₀ m f) n

have hev : embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
    = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := by
  rw [embInfInf.apply]
  exact hsup_apply (fun n => iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z

have hterm : ∀ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z = r n (f (r n z)) := by
```

```
    intro n
    rw [hrw, hrw, iInfTerm.apply, hcoord n]
    rfl
  have hmono_frz : Monotone (fun m => f (r m z)) :=
    fun a b hab => f.monotone (hr_mono z hab)
  have hfm : ∀ n, Monotone (fun m => r n (f (r m z))) :=
    fun n _ _ hab => (r n).monotone (f.monotone (hr_mono z hab))
  have hfn : ∀ m, Monotone (fun n => r n (f (r m z))) :=
    fun m => hr_mono (f (r m z))

  have hfz : f z = ⋃ n, r n (f (r n z)) :=
    calc f z = ⋃ k, r k (f z) := hA (f z)
      _ = ⋃ k, r k (f (⋃ m, r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [← hA z]
      _ = ⋃ k, r k (⋃ m, f (r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [hcont f (fun m => r m z) (hr_mono z)]
      _ = ⋃ k, ⋃ m, r k (f (r m z)) :=
            iSup_congr (fun k => hcont (r k) (fun m => f (r m z)) hmono_frz)
      _ = ⋃ n, r n (f (r n z)) :=
            iSup₂_monotone_eq_diagonal (fun n m => r n (f (r m z))) hfm hfn
  calc embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
      = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := hev
    _ = ⋃ n, r n (f (r n z)) := iSup_congr hterm
    _ = f z := hfz.symm

theorem embInfInf_projInfInf (f : DInf.fn D₀ j₀) :
    embInfInf D₀ j₀ (projInfInf D₀ j₀ f) = f := by
  have h := congrArg (fun g => g f) (embInfInf_comp_projInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

theorem embInfInf_le_iff (x y : DInf D₀ j₀) :
    embInfInf D₀ j₀ x ≤ embInfInf D₀ j₀ y ↔ x ≤ y := by
  constructor
  · intro h
    have := (projInfInf D₀ j₀).monotone h
    rwa [projInfInf.embInfInf, projInfInf.embInfInf] at this
  · intro h; exact (embInfInf D₀ j₀).monotone h

end LimitMaps

end DomainTheory.ContinuousLattice
```

6

embInfInf_projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    towerProj_retr_conjMap_succ
```

```
public import DomainTheory.ContinuousLattice.InverseLimits.lemma_4_5
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInfInf_comp_projInfInf :
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro f
  rw [ScottMap.comp_apply, ScottMap.idMap_apply]
  apply ScottMap.ext
  intro z

  set r : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀) :=
    fun n => (embInf (towerType D₀) (towerProj D₀ j₀) n).comp
               (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) with hr
  have hrw : ∀ n (w : DInf D₀ j₀), r n w
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w) := by
    intro n w
    simp only [hr, ScottMap.comp_apply]
  have hr_mono : ∀ (w : DInf D₀ j₀), Monotone (fun m => r m w) := by
    intro w
    refine monotone_nat_of_le_succ (fun m => ?_)
    show r m w ≤ r (m + 1) w
    rw [hrw, hrw]
    exact embInf.le_succ (towerType D₀) (towerProj D₀ j₀) w m

  have hA : ∀ (w : DInf D₀ j₀), w = ⋃ m, r m w := by
    intro w
    have h1 : (⋃ m, r m w)
        = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) m
                 (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m w) :=
      iSup_congr (fun m => hrw m w)
    rw [h1]
    exact inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) w

  have hsup_apply : ∀ (g : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (w : DInf D₀ j₀),
      (⋃ n, g n) w = ⋃ n, g n w := by
    intro g w
    rw [show (⋃ n, g n) = sSup (Set.range g) from sSup_range.symm,
      ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
    rfl
```

```
have hcont : ∀ (g : ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (a : ℕ → DInf D₀ j₀),
    Monotone a → g (⋃ m, a m) = ⋃ m, g (a m) := by
  intro g a ha
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 fun i j => ⟨max i j, ha (le_max_left i j), ha (le_max_right i
  j)⟩
  rw [show (⋃ m, a m) = sSup (Set.range a) from sSup_range.symm,
    g.preservesDirectedSup_coe (Set.range a) (Set.range_nonempty a) hdir,
    ← Set.range_comp, sSup_range]
  rfl

have hpi : projInfInf D₀ j₀ f
    = ⋃ k, embInf (towerType D₀) (towerProj D₀ j₀) (k + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                 (embInf (towerType D₀) (towerProj D₀ j₀) k) f) := by
  rw [projInfInf.apply]
  exact iSup_congr (fun n => jInfTerm.apply D₀ j₀ n f)

have hcoord : ∀ n, (projInfInf D₀ j₀ f).1 (n + 1)
    = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  intro n
  rw [hpi]
  exact lemma_4_5 (towerType D₀) (towerProj D₀ j₀)
    (fun k => conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                      (embInf (towerType D₀) (towerProj D₀ j₀) k) f)
    (fun m => towerProj_retr_conjMap_succ D₀ j₀ m f) n

have hev : embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
    = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := by
  rw [embInfInf.apply]
  exact hsup_apply (fun n => iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z

have hterm : ∀ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z = r n (f (r n z)) := by
  intro n
  rw [hrw, hrw, iInfTerm.apply, hcoord n]
  rfl
have hmono_frz : Monotone (fun m => f (r m z)) :=
  fun a b hab => f.monotone (hr_mono z hab)
have hfm : ∀ n, Monotone (fun m => r n (f (r m z))) :=
  fun n _ _ hab => (r n).monotone (f.monotone (hr_mono z hab))
have hfn : ∀ m, Monotone (fun n => r n (f (r m z))) :=
  fun m => hr_mono (f (r m z))

have hfz : f z = ⋃ n, r n (f (r n z)) :=
  calc f z = ⋃ k, r k (f z) := hA (f z)
    _ = ⋃ k, r k (f (⋃ m, r m z)) := by
          refine iSup_congr (fun k => ?_)
          rw [← hA z]
    _ = ⋃ k, r k (⋃ m, f (r m z)) := by
          refine iSup_congr (fun k => ?_)
          rw [hcont f (fun m => r m z) (hr_mono z)]
    _ = ⋃ k, ⋃ m, r k (f (r m z)) :=
          iSup_congr (fun k => hcont (r k) (fun m => f (r m z)) hmono_frz)
    _ = ⋃ n, r n (f (r n z)) :=
          iSup₂_monotone_eq_diagonal (fun n m => r n (f (r m z))) hfm hfn
```

```
  calc embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
      = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := hev
    _ = ⋃ n, r n (f (r n z)) := iSup_congr hterm
    _ = f z := hfz.symm

theorem embInfInf_projInfInf (f : DInf.fn D₀ j₀) :
    embInfInf D₀ j₀ (projInfInf D₀ j₀ f) = f := by
  have h := congrArg (fun g => g f) (embInfInf_comp_projInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

theorem embInfInf_le_iff (x y : DInf D₀ j₀) :
    embInfInf D₀ j₀ x ≤ embInfInf D₀ j₀ y ↔ x ≤ y := by
  constructor
  · intro h
    have := (projInfInf D₀ j₀).monotone h
    rwa [projInfInf.embInfInf, projInfInf.embInfInf] at this
  · intro h; exact (embInfInf D₀ j₀).monotone h

end LimitMaps

end DomainTheory.ContinuousLattice
```

7

embInfInf_projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    towerProj_retr_conjMap_succ
public import DomainTheory.ContinuousLattice.InverseLimits.lemma_4_5
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInfInf_comp_projInfInf :
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro f
  rw [ScottMap.comp_apply, ScottMap.idMap_apply]
```

```
apply ScottMap.ext
intro z

set r : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀) :=
  fun n => (embInf (towerType D₀) (towerProj D₀ j₀) n).comp
            (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) with hr
have hrw : ∀ n (w : DInf D₀ j₀), r n w
    = embInf (towerType D₀) (towerProj D₀ j₀) n
        (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w) := by
  intro n w
  simp only [hr, ScottMap.comp_apply]
have hr_mono : ∀ (w : DInf D₀ j₀), Monotone (fun m => r m w) := by
  intro w
  refine monotone_nat_of_le_succ (fun m => ?_)
  show r m w ≤ r (m + 1) w
  rw [hrw, hrw]
  exact embInf.le_succ (towerType D₀) (towerProj D₀ j₀) w m

have hA : ∀ (w : DInf D₀ j₀), w = ⋃ m, r m w := by
  intro w
  have h1 : (⋃ m, r m w)
      = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) m
               (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m w) :=
    iSup_congr (fun m => hrw m w)
  rw [h1]
  exact inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) w

have hsup_apply : ∀ (g : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (w : DInf D₀ j₀),
    (⋃ n, g n) w = ⋃ n, g n w := by
  intro g w
  rw [show (⋃ n, g n) = sSup (Set.range g) from sSup_range.symm,
    ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

have hcont : ∀ (g : ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (a : ℕ → DInf D₀ j₀),
    Monotone a → g (⋃ m, a m) = ⋃ m, g (a m) := by
  intro g a ha
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 fun i j => ⟨max i j, ha (le_max_left i j), ha (le_max_right i
  j)⟩
  rw [show (⋃ m, a m) = sSup (Set.range a) from sSup_range.symm,
    g.preservesDirectedSup_coe (Set.range a) (Set.range_nonempty a) hdir,
    ← Set.range_comp, sSup_range]
  rfl

have hpi : projInfInf D₀ j₀ f
    = ⋃ k, embInf (towerType D₀) (towerProj D₀ j₀) (k + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                 (embInf (towerType D₀) (towerProj D₀ j₀) k) f) := by
  rw [projInfInf.apply]
  exact iSup_congr (fun n => jInfTerm.apply D₀ j₀ n f)

have hcoord : ∀ n, (projInfInf D₀ j₀ f).1 (n + 1)
    = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  intro n
```

```
    rw [hpi]
    exact lemma_4_5 (towerType D₀) (towerProj D₀ j₀)
      (fun k => conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                        (embInf (towerType D₀) (towerProj D₀ j₀) k) f)
      (fun m => towerProj_retr_conjMap_succ D₀ j₀ m f) n

  have hev : embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
      = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := by
    rw [embInfInf.apply]
    exact hsup_apply (fun n => iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z

  have hterm : ∀ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z = r n (f (r n z)) := by
    intro n
    rw [hrw, hrw, iInfTerm.apply, hcoord n]
    rfl
  have hmono_frz : Monotone (fun m => f (r m z)) :=
    fun a b hab => f.monotone (hr_mono z hab)
  have hfm : ∀ n, Monotone (fun m => r n (f (r m z))) :=
    fun n _ _ hab => (r n).monotone (f.monotone (hr_mono z hab))
  have hfn : ∀ m, Monotone (fun n => r n (f (r m z))) :=
    fun m => hr_mono (f (r m z))

  have hfz : f z = ⋃ n, r n (f (r n z)) :=
    calc f z = ⋃ k, r k (f z) := hA (f z)
      _ = ⋃ k, r k (f (⋃ m, r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [← hA z]
      _ = ⋃ k, r k (⋃ m, f (r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [hcont f (fun m => r m z) (hr_mono z)]
      _ = ⋃ k, ⋃ m, r k (f (r m z)) :=
            iSup_congr (fun k => hcont (r k) (fun m => f (r m z)) hmono_frz)
      _ = ⋃ n, r n (f (r n z)) :=
            iSup₂_monotone_eq_diagonal (fun n m => r n (f (r m z))) hfm hfn
  calc embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
      = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := hev
    _ = ⋃ n, r n (f (r n z)) := iSup_congr hterm
    _ = f z := hfz.symm

theorem embInfInf_projInfInf (f : DInf.fn D₀ j₀) :
    embInfInf D₀ j₀ (projInfInf D₀ j₀ f) = f := by
  have h := congrArg (fun g => g f) (embInfInf_comp_projInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

theorem embInfInf_le_iff (x y : DInf D₀ j₀) :
    embInfInf D₀ j₀ x ≤ embInfInf D₀ j₀ y ↔ x ≤ y := by
  constructor
  · intro h
    have := (projInfInf D₀ j₀).monotone h
    rwa [projInfInf.embInfInf, projInfInf.embInfInf] at this
  · intro h; exact (embInfInf D₀ j₀).monotone h

end LimitMaps

end DomainTheory.ContinuousLattice
```

embInfInf_projInfInf.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.iSup₂
    _monotone_eq_diagonal
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.
    towerProj_retr_conjMap_succ
public import DomainTheory.ContinuousLattice.InverseLimits.lemma_4_5
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem embInfInf_comp_projInfInf :
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap := by
  apply ScottMap.ext
  intro f
  rw [ScottMap.comp_apply, ScottMap.idMap_apply]
  apply ScottMap.ext
  intro z

  set r : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀) :=
    fun n => (embInf (towerType D₀) (towerProj D₀ j₀) n).comp
               (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n) with hr
  have hrw : ∀ n (w : DInf D₀ j₀), r n w
      = embInf (towerType D₀) (towerProj D₀ j₀) n
          (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n w) := by
    intro n w
    simp only [hr, ScottMap.comp_apply]
  have hr_mono : ∀ (w : DInf D₀ j₀), Monotone (fun m => r m w) := by
    intro w
    refine monotone_nat_of_le_succ (fun m => ?_)
    show r m w ≤ r (m + 1) w
    rw [hrw, hrw]
    exact embInf.le_succ (towerType D₀) (towerProj D₀ j₀) w m

  have hA : ∀ (w : DInf D₀ j₀), w = ⋃ m, r m w := by
    intro w
    have h1 : (⋃ m, r m w)
        = ⋃ m, embInf (towerType D₀) (towerProj D₀ j₀) m
```

```
              (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) m w) :=
    iSup_congr (fun m => hrw m w)
  rw [h1]
  exact inverseLimit.eq_iSup (towerType D₀) (towerProj D₀ j₀) w

have hsup_apply : ∀ (g : ℕ → ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (w : DInf D₀ j₀),
    (⋃ n, g n) w = ⋃ n, g n w := by
  intro g w
  rw [show (⋃ n, g n) = sSup (Set.range g) from sSup_range.symm,
    ScottMap.sSup_apply, ← Set.range_comp, sSup_range]
  rfl

have hcont : ∀ (g : ScottMap (DInf D₀ j₀) (DInf D₀ j₀)) (a : ℕ → DInf D₀ j₀),
    Monotone a → g (⋃ m, a m) = ⋃ m, g (a m) := by
  intro g a ha
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 fun i j => ⟨max i j, ha (le_max_left i j), ha (le_max_right i
  j)⟩
  rw [show (⋃ m, a m) = sSup (Set.range a) from sSup_range.symm,
    g.preservesDirectedSup_coe (Set.range a) (Set.range_nonempty a) hdir,
    ← Set.range_comp, sSup_range]
  rfl

have hpi : projInfInf D₀ j₀ f
    = ⋃ k, embInf (towerType D₀) (towerProj D₀ j₀) (k + 1)
        (conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                 (embInf (towerType D₀) (towerProj D₀ j₀) k) f) := by
  rw [projInfInf.apply]
  exact iSup_congr (fun n => jInfTerm.apply D₀ j₀ n f)

have hcoord : ∀ n, (projInfInf D₀ j₀ f).1 (n + 1)
    = conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) n)
              (embInf (towerType D₀) (towerProj D₀ j₀) n) f := by
  intro n
  rw [hpi]
  exact lemma_4_5 (towerType D₀) (towerProj D₀ j₀)
    (fun k => conjMap (limitProjectionToLevel (towerType D₀) (towerProj D₀ j₀) k)
                      (embInf (towerType D₀) (towerProj D₀ j₀) k) f)
    (fun m => towerProj_retr_conjMap_succ D₀ j₀ m f) n

have hev : embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
    = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := by
  rw [embInfInf.apply]
  exact hsup_apply (fun n => iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z

have hterm : ∀ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z = r n (f (r n z)) := by
  intro n
  rw [hrw, hrw, iInfTerm.apply, hcoord n]
  rfl
have hmono_frz : Monotone (fun m => f (r m z)) :=
  fun a b hab => f.monotone (hr_mono z hab)
have hfm : ∀ n, Monotone (fun m => r n (f (r m z))) :=
  fun n _ _ hab => (r n).monotone (f.monotone (hr_mono z hab))
have hfn : ∀ m, Monotone (fun n => r n (f (r m z))) :=
  fun m => hr_mono (f (r m z))
```

```
  have hfz : f z = ⋃ n, r n (f (r n z)) :=
    calc f z = ⋃ k, r k (f z) := hA (f z)
      _ = ⋃ k, r k (f (⋃ m, r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [← hA z]
      _ = ⋃ k, r k (⋃ m, f (r m z)) := by
            refine iSup_congr (fun k => ?_)
            rw [hcont f (fun m => r m z) (hr_mono z)]
      _ = ⋃ k, ⋃ m, r k (f (r m z)) :=
            iSup_congr (fun k => hcont (r k) (fun m => f (r m z)) hmono_frz)
      _ = ⋃ n, r n (f (r n z)) :=
            iSup₂_monotone_eq_diagonal (fun n m => r n (f (r m z))) hfm hfn
  calc embInfInf D₀ j₀ (projInfInf D₀ j₀ f) z
      = ⋃ n, (iInfTerm D₀ j₀ n (projInfInf D₀ j₀ f)) z := hev
    _ = ⋃ n, r n (f (r n z)) := iSup_congr hterm
    _ = f z := hfz.symm

theorem embInfInf_projInfInf (f : DInf.fn D₀ j₀) :
    embInfInf D₀ j₀ (projInfInf D₀ j₀ f) = f := by
  have h := congrArg (fun g => g f) (embInfInf_comp_projInfInf D₀ j₀)
  simpa [ScottMap.comp_apply, ScottMap.idMap_apply] using h

theorem embInfInf_le_iff (x y : DInf D₀ j₀) :
    embInfInf D₀ j₀ x ≤ embInfInf D₀ j₀ y ↔ x ≤ y := by
  constructor
  · intro h
    have := (projInfInf D₀ j₀).monotone h
    rwa [projInfInf.embInfInf, projInfInf.embInfInf] at this
  · intro h; exact (embInfInf D₀ j₀).monotone h

end LimitMaps

end DomainTheory.ContinuousLattice
```

9

theorem_4_4.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.stepMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.theorem_3_3
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.theorem_4_4_more

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps
```

```
variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem theorem_4_4_inverses :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap ∧
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap :=
  ⟨projInfInf.comp_embInfInf D₀ j₀, embInfInf_comp_projInfInf D₀ j₀⟩

noncomputable def theorem_4_4_orderIso : OrderIso (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀)).toOrderIso
    (embInfInf D₀ j₀).monotone (projInfInf D₀ j₀).monotone

theorem theorem_4_4 (h₀ : ContinuousLattice D₀.carrier) :
    @ContinuousLattice (DInf D₀ j₀) inferInstance ∧
      Nonempty
        (@Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
          (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
          (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀))) := by
  have hTower : ∀ n, ContinuousLattice (towerType D₀ n) := by
    intro n
    induction n with
    | zero => exact h₀
    | succ n ih => exact stepMap.isContinuousLattice ih ih
  refine ⟨proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower, ?_⟩
  exact ⟨theorem_4_4.sourceTopology_homeomorph D₀ j₀ hTower⟩

end Thm44d
end LimitMaps

end DomainTheory.ContinuousLattice
```

0

theorem_4_4.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.stepMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.theorem_3_3
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.theorem_4_4_more

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice
```

```
attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem theorem_4_4_inverses :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap ∧
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap :=
  ⟨projInfInf.comp_embInfInf D₀ j₀, embInfInf_comp_projInfInf D₀ j₀⟩

noncomputable def theorem_4_4_orderIso : OrderIso (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀)).toOrderIso
    (embInfInf D₀ j₀).monotone (projInfInf D₀ j₀).monotone

theorem theorem_4_4 (h₀ : ContinuousLattice D₀.carrier) :
    @ContinuousLattice (DInf D₀ j₀) inferInstance ∧
      Nonempty
        (@Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
          (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
          (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀))) := by
  have hTower : ∀ n, ContinuousLattice (towerType D₀ n) := by
    intro n
    induction n with
    | zero => exact h₀
    | succ n ih => exact stepMap.isContinuousLattice ih ih
  refine ⟨proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower, ?_⟩
  exact ⟨theorem_4_4.sourceTopology_homeomorph D₀ j₀ hTower⟩

end Thm44d
end LimitMaps

end DomainTheory.ContinuousLattice
```

1

theorem_4_4.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.stepMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.theorem_3_3
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.theorem_4_4_more
```

```
public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem theorem_4_4_inverses :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap ∧
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap :=
  ⟨projInfInf.comp_embInfInf D₀ j₀, embInfInf_comp_projInfInf D₀ j₀⟩

noncomputable def theorem_4_4_orderIso : OrderIso (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀)).toOrderIso
    (embInfInf D₀ j₀).monotone (projInfInf D₀ j₀).monotone

theorem theorem_4_4 (h₀ : ContinuousLattice D₀.carrier) :
    @ContinuousLattice (DInf D₀ j₀) inferInstance ∧
      Nonempty
        (@Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
          (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
          (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀))) := by
  have hTower : ∀ n, ContinuousLattice (towerType D₀ n) := by
    intro n
    induction n with
    | zero => exact h₀
    | succ n ih => exact stepMap.isContinuousLattice ih ih
  refine ⟨proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower, ?_⟩
  exact ⟨theorem_4_4.sourceTopology_homeomorph D₀ j₀ hTower⟩

end Thm44d
end LimitMaps

end DomainTheory.ContinuousLattice
```

2

theorem_4_4.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
```

```
public import DomainTheory.ContinuousLattice.FunctionSpaces.stepMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.theorem_3_3
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.theorem_4_4_more

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem theorem_4_4_inverses :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap ∧
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap :=
  ⟨projInfInf.comp_embInfInf D₀ j₀, embInfInf_comp_projInfInf D₀ j₀⟩

noncomputable def theorem_4_4_orderIso : OrderIso (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀)).toOrderIso
    (embInfInf D₀ j₀).monotone (projInfInf D₀ j₀).monotone

theorem theorem_4_4 (h₀ : ContinuousLattice D₀.carrier) :
    @ContinuousLattice (DInf D₀ j₀) inferInstance ∧
      Nonempty
        (@Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
          (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
          (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀))) := by
  have hTower : ∀ n, ContinuousLattice (towerType D₀ n) := by
    intro n
    induction n with
    | zero => exact h₀
    | succ n ih => exact stepMap.isContinuousLattice ih ih
  refine ⟨proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower, ?_⟩
  exact ⟨theorem_4_4.sourceTopology_homeomorph D₀ j₀ hTower⟩

end Thm44d
end LimitMaps

end DomainTheory.ContinuousLattice
```

3

theorem_4_4.lean

```
module
```

```
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.stepMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.theorem_3_3
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.theorem_4_4_more

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem theorem_4_4_inverses :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap ∧
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap :=
  ⟨projInfInf.comp_embInfInf D₀ j₀, embInfInf_comp_projInfInf D₀ j₀⟩

noncomputable def theorem_4_4_orderIso : OrderIso (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀)).toOrderIso
    (embInfInf D₀ j₀).monotone (projInfInf D₀ j₀).monotone

theorem theorem_4_4 (h₀ : ContinuousLattice D₀.carrier) :
    @ContinuousLattice (DInf D₀ j₀) inferInstance ∧
      Nonempty
        (@Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
          (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
          (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀))) := by
  have hTower : ∀ n, ContinuousLattice (towerType D₀ n) := by
    intro n
    induction n with
    | zero => exact h₀
    | succ n ih => exact stepMap.isContinuousLattice ih ih
  refine ⟨proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower, ?_⟩
  exact ⟨theorem_4_4.sourceTopology_homeomorph D₀ j₀ hTower⟩

end Thm44d
end LimitMaps

end DomainTheory.ContinuousLattice
```

theorem_4_4.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.stepMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.theorem_3_3
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.theorem_4_4_more

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem theorem_4_4_inverses :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap ∧
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap :=
  ⟨projInfInf.comp_embInfInf D₀ j₀, embInfInf_comp_projInfInf D₀ j₀⟩

noncomputable def theorem_4_4_orderIso : OrderIso (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀)).toOrderIso
    (embInfInf D₀ j₀).monotone (projInfInf D₀ j₀).monotone

theorem theorem_4_4 (h₀ : ContinuousLattice D₀.carrier) :
    @ContinuousLattice (DInf D₀ j₀) inferInstance ∧
      Nonempty
        (@Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
          (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
          (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀))) := by
  have hTower : ∀ n, ContinuousLattice (towerType D₀ n) := by
    intro n
    induction n with
    | zero => exact h₀
    | succ n ih => exact stepMap.isContinuousLattice ih ih
  refine ⟨proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower, ?_⟩
  exact ⟨theorem_4_4.sourceTopology_homeomorph D₀ j₀ hTower⟩

end Thm44d
end LimitMaps
```

```
end DomainTheory.ContinuousLattice
```

5

theorem_4_4.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.stepMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.theorem_3_3
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.theorem_4_4_more

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem theorem_4_4_inverses :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap ∧
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap :=
  ⟨projInfInf.comp_embInfInf D₀ j₀, embInfInf_comp_projInfInf D₀ j₀⟩

noncomputable def theorem_4_4_orderIso : OrderIso (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀)).toOrderIso
    (embInfInf D₀ j₀).monotone (projInfInf D₀ j₀).monotone

theorem theorem_4_4 (h₀ : ContinuousLattice D₀.carrier) :
    @ContinuousLattice (DInf D₀ j₀) inferInstance ∧
      Nonempty
        (@Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
          (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
          (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀))) := by
  have hTower : ∀ n, ContinuousLattice (towerType D₀ n) := by
    intro n
    induction n with
    | zero => exact h₀
    | succ n ih => exact stepMap.isContinuousLattice ih ih
  refine ⟨proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower, ?_⟩
  exact ⟨theorem_4_4.sourceTopology_homeomorph D₀ j₀ hTower⟩
```

```
end Thm44d
end LimitMaps

end DomainTheory.ContinuousLattice
```

6

theorem_4_4.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.stepMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.theorem_3_3
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.theorem_4_4_more

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem theorem_4_4_inverses :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap ∧
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap :=
  ⟨projInfInf.comp_embInfInf D₀ j₀, embInfInf_comp_projInfInf D₀ j₀⟩

noncomputable def theorem_4_4_orderIso : OrderIso (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀)).toOrderIso
    (embInfInf D₀ j₀).monotone (projInfInf D₀ j₀).monotone

theorem theorem_4_4 (h₀ : ContinuousLattice D₀.carrier) :
    @ContinuousLattice (DInf D₀ j₀) inferInstance ∧
      Nonempty
        (@Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
          (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
          (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀))) := by
  have hTower : ∀ n, ContinuousLattice (towerType D₀ n) := by
    intro n
    induction n with
```

```
    | zero => exact h₀
    | succ n ih => exact stepMap.isContinuousLattice ih ih
  refine ⟨proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower, ?_⟩
  exact ⟨theorem_4_4.sourceTopology_homeomorph D₀ j₀ hTower⟩

end Thm44d
end LimitMaps

end DomainTheory.ContinuousLattice
```

7

theorem_4_4.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.stepMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.theorem_3_3
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.theorem_4_4_more

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem theorem_4_4_inverses :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap ∧
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap :=
  ⟨projInfInf.comp_embInfInf D₀ j₀, embInfInf_comp_projInfInf D₀ j₀⟩

noncomputable def theorem_4_4_orderIso : OrderIso (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀)).toOrderIso
    (embInfInf D₀ j₀).monotone (projInfInf D₀ j₀).monotone

theorem theorem_4_4 (h₀ : ContinuousLattice D₀.carrier) :
    @ContinuousLattice (DInf D₀ j₀) inferInstance ∧
      Nonempty
        (@Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
          (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
```

```
          (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀))) := by
  have hTower : ∀ n, ContinuousLattice (towerType D₀ n) := by
    intro n
    induction n with
    | zero => exact h₀
    | succ n ih => exact stepMap.isContinuousLattice ih ih
  refine ⟨proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower, ?_⟩
  exact ⟨theorem_4_4.sourceTopology_homeomorph D₀ j₀ hTower⟩

end Thm44d
end LimitMaps

end DomainTheory.ContinuousLattice
```

8

theorem_4_4.lean

```
module

public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.stepMap
public import DomainTheory.ContinuousLattice.FunctionSpaces.theorem_3_3
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.theorem_4_4_more

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

theorem theorem_4_4_inverses :
    (projInfInf D₀ j₀).comp (embInfInf D₀ j₀) = ScottMap.idMap ∧
    (embInfInf D₀ j₀).comp (projInfInf D₀ j₀) = ScottMap.idMap :=
  ⟨projInfInf.comp_embInfInf D₀ j₀, embInfInf_comp_projInfInf D₀ j₀⟩

noncomputable def theorem_4_4_orderIso : OrderIso (DInf D₀ j₀) (DInf.fn D₀ j₀) :=
  (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀)).toOrderIso
    (embInfInf D₀ j₀).monotone (projInfInf D₀ j₀).monotone

theorem theorem_4_4 (h₀ : ContinuousLattice D₀.carrier) :
```

```
    @ContinuousLattice (DInf D₀ j₀) inferInstance ∧
      Nonempty
        (@Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
          (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
          (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀))) := by
  have hTower : ∀ n, ContinuousLattice (towerType D₀ n) := by
    intro n
    induction n with
    | zero => exact h₀
    | succ n ih => exact stepMap.isContinuousLattice ih ih
  refine ⟨proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower, ?_⟩
  exact ⟨theorem_4_4.sourceTopology_homeomorph D₀ j₀ hTower⟩

end Thm44d
end LimitMaps

end DomainTheory.ContinuousLattice
```

9

lemma_4_5.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.iComp
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.InverseLimits.projectionAlongTower
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]
variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

theorem lemma_4_5 (u : ∀ n, D (n + 1))
    (hu : ∀ n, (P (n + 1)).retr (u (n + 1)) = u n) (n : ℕ) :
    (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P).1 (n + 1) = u n := by
  let a : ℕ → InverseLimit D P := fun k => embInf D P (k + 1) (u k)
  have ha_succ (k : ℕ) : a k ≤ a (k + 1) := by
    rw [show a k = embInf D P (k + 1) (u k) from rfl,
      show a (k + 1) = embInf D P (k + 2) (u (k + 1)) from rfl,
      ← embInf.succ D P (k + 1) (u k)]
    exact embInf.monotone D P (k + 2)
      (by calc (P (k + 1)).incl (u k)
            = (P (k + 1)).incl ((P (k + 1)).retr (u (k + 1))) := by rw [hu k]
          _ ≤ u (k + 1) := (P (k + 1)).incl_retr_le _)
```

```
  have ha : Monotone a := monotone_nat_of_le_succ ha_succ
  have hprojTower : ∀ d n : ℕ,
      projectionAlongTower D P (show n + 1 ≤ n + d + 1 by omega) (u (n + d)) = u n :=
    by
     intro d
     induction d with
     | zero =>
         intro n
         simpa only [Nat.add_zero] using
           (projectionAlongTower.self D P (le_refl (n + 1)) (u n))
     | succ d ih =>
         intro n
         simp only [Nat.add_succ]
         rw [projectionAlongTower.succ D P
           (show n + 1 ≤ n + d + 1 by omega)
           (show n + 1 ≤ (n + d + 1) + 1 by omega)]
         rw [hu (n + d)]
         exact ih n
  have hprojection : ∀ d n : ℕ,
      (embInf D P (n + d + 1) (u (n + d))).1 (n + 1) = u n := by
     intro d n
     cases d with
     | zero =>
         change iComp D P (n + 1) (u n) (n + 1) = u n
         exact iComp.self D P (n + 1) (u n)
     | succ d =>
         change iComp D P (n + (d + 1) + 1) (u (n + (d + 1))) (n + 1) = u n
         rw [iComp.of_ge D P (by omega)]
         exact hprojTower (d + 1) n
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 ha.directed_le
  have hcont := (limitProjectionToLevel D P (n + 1)).preservesDirectedSup_coe
    (Set.range a) (Set.range_nonempty a) hdir
  rw [show (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P)
      = sSup (Set.range a) from sSup_range.symm]
  change (limitProjectionToLevel D P (n + 1)) (sSup (Set.range a)) = u n
  rw [hcont, ← Set.range_comp, sSup_range]
  apply le_antisymm
  · exact iSup_le fun m => by
      by_cases hmn : n ≤ m
      · obtain ⟨d, rfl⟩ := Nat.exists_eq_add_of_le hmn
        exact le_of_eq (hprojection d n)
      · exact le_trans ((ha (Nat.le_of_not_ge hmn)) (n + 1))
          (le_of_eq (hprojection 0 n))
  · exact le_trans (le_of_eq (hprojection 0 n).symm) (le_iSup (fun m => (a m).1 (n + 1)
    ) n)

end InverseLimit
end DomainTheory.ContinuousLattice
```

0

lemma_4_5.lean

```
module
```

```
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.iComp
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.InverseLimits.projectionAlongTower
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]
variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

theorem lemma_4_5 (u : ∀ n, D (n + 1))
    (hu : ∀ n, (P (n + 1)).retr (u (n + 1)) = u n) (n : ℕ) :
    (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P).1 (n + 1) = u n := by
  let a : ℕ → InverseLimit D P := fun k => embInf D P (k + 1) (u k)
  have ha_succ (k : ℕ) : a k ≤ a (k + 1) := by
    rw [show a k = embInf D P (k + 1) (u k) from rfl,
      show a (k + 1) = embInf D P (k + 2) (u (k + 1)) from rfl,
      ← embInf.succ D P (k + 1) (u k)]
    exact embInf.monotone D P (k + 2)
      (by calc (P (k + 1)).incl (u k)
            = (P (k + 1)).incl ((P (k + 1)).retr (u (k + 1))) := by rw [hu k]
          _ ≤ u (k + 1) := (P (k + 1)).incl_retr_le _)
  have ha : Monotone a := monotone_nat_of_le_succ ha_succ
  have hprojTower : ∀ d n : ℕ,
      projectionAlongTower D P (show n + 1 ≤ n + d + 1 by omega) (u (n + d)) = u n :=
    by
    intro d
    induction d with
    | zero =>
        intro n
        simpa only [Nat.add_zero] using
          (projectionAlongTower.self D P (le_refl (n + 1)) (u n))
    | succ d ih =>
        intro n
        simp only [Nat.add_succ]
        rw [projectionAlongTower.succ D P
          (show n + 1 ≤ n + d + 1 by omega)
          (show n + 1 ≤ (n + d + 1) + 1 by omega)]
        rw [hu (n + d)]
        exact ih n
  have hprojection : ∀ d n : ℕ,
      (embInf D P (n + d + 1) (u (n + d))).1 (n + 1) = u n := by
    intro d n
    cases d with
    | zero =>
        change iComp D P (n + 1) (u n) (n + 1) = u n
```

```
        exact iComp.self D P (n + 1) (u n)
    | succ d =>
        change iComp D P (n + (d + 1) + 1) (u (n + (d + 1))) (n + 1) = u n
        rw [iComp.of_ge D P (by omega)]
        exact hprojTower (d + 1) n
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 ha.directed_le
  have hcont := (limitProjectionToLevel D P (n + 1)).preservesDirectedSup_coe
    (Set.range a) (Set.range_nonempty a) hdir
  rw [show (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P)
      = sSup (Set.range a) from sSup_range.symm]
  change (limitProjectionToLevel D P (n + 1)) (sSup (Set.range a)) = u n
  rw [hcont, ← Set.range_comp, sSup_range]
  apply le_antisymm
  · exact iSup_le fun m => by
      by_cases hmn : n ≤ m
      · obtain ⟨d, rfl⟩ := Nat.exists_eq_add_of_le hmn
        exact le_of_eq (hprojection d n)
      · exact le_trans ((ha (Nat.le_of_not_ge hmn)) (n + 1))
          (le_of_eq (hprojection 0 n))
  · exact le_trans (le_of_eq (hprojection 0 n).symm) (le_iSup (fun m => (a m).1 (n + 1)
    ) n)

end InverseLimit
end DomainTheory.ContinuousLattice
```

1

lemma_4_5.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.iComp
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.InverseLimits.projectionAlongTower
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]
variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

theorem lemma_4_5 (u : ∀ n, D (n + 1))
    (hu : ∀ n, (P (n + 1)).retr (u (n + 1)) = u n) (n : ℕ) :
    (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P).1 (n + 1) = u n := by
  let a : ℕ → InverseLimit D P := fun k => embInf D P (k + 1) (u k)
```

```
  have ha_succ (k : ℕ) : a k ≤ a (k + 1) := by
    rw [show a k = embInf D P (k + 1) (u k) from rfl,
      show a (k + 1) = embInf D P (k + 2) (u (k + 1)) from rfl,
      ← embInf.succ D P (k + 1) (u k)]
    exact embInf.monotone D P (k + 2)
      (by calc (P (k + 1)).incl (u k)
            = (P (k + 1)).incl ((P (k + 1)).retr (u (k + 1))) := by rw [hu k]
          _ ≤ u (k + 1) := (P (k + 1)).incl_retr_le _)
  have ha : Monotone a := monotone_nat_of_le_succ ha_succ
  have hprojTower : ∀ d n : ℕ,
      projectionAlongTower D P (show n + 1 ≤ n + d + 1 by omega) (u (n + d)) = u n :=
    by
    intro d
    induction d with
    | zero =>
        intro n
        simpa only [Nat.add_zero] using
          (projectionAlongTower.self D P (le_refl (n + 1)) (u n))
    | succ d ih =>
        intro n
        simp only [Nat.add_succ]
        rw [projectionAlongTower.succ D P
          (show n + 1 ≤ n + d + 1 by omega)
          (show n + 1 ≤ (n + d + 1) + 1 by omega)]
        rw [hu (n + d)]
        exact ih n
  have hprojection : ∀ d n : ℕ,
      (embInf D P (n + d + 1) (u (n + d))).1 (n + 1) = u n := by
    intro d n
    cases d with
    | zero =>
        change iComp D P (n + 1) (u n) (n + 1) = u n
        exact iComp.self D P (n + 1) (u n)
    | succ d =>
        change iComp D P (n + (d + 1) + 1) (u (n + (d + 1))) (n + 1) = u n
        rw [iComp.of_ge D P (by omega)]
        exact hprojTower (d + 1) n
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 ha.directed_le
  have hcont := (limitProjectionToLevel D P (n + 1)).preservesDirectedSup_coe
    (Set.range a) (Set.range_nonempty a) hdir
  rw [show (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P)
      = sSup (Set.range a) from sSup_range.symm]
  change (limitProjectionToLevel D P (n + 1)) (sSup (Set.range a)) = u n
  rw [hcont, ← Set.range_comp, sSup_range]
  apply le_antisymm
  · exact iSup_le fun m => by
      by_cases hmn : n ≤ m
      · obtain ⟨d, rfl⟩ := Nat.exists_eq_add_of_le hmn
        exact le_of_eq (hprojection d n)
      · exact le_trans ((ha (Nat.le_of_not_ge hmn)) (n + 1))
          (le_of_eq (hprojection 0 n))
  · exact le_trans (le_of_eq (hprojection 0 n).symm) (le_iSup (fun m => (a m).1 (n + 1)
    ) n)

end InverseLimit
```

```
end DomainTheory.ContinuousLattice
```

2

lemma_4_5.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.iComp
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.InverseLimits.projectionAlongTower
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]
variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

theorem lemma_4_5 (u : ∀ n, D (n + 1))
    (hu : ∀ n, (P (n + 1)).retr (u (n + 1)) = u n) (n : ℕ) :
    (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P).1 (n + 1) = u n := by
  let a : ℕ → InverseLimit D P := fun k => embInf D P (k + 1) (u k)
  have ha_succ (k : ℕ) : a k ≤ a (k + 1) := by
    rw [show a k = embInf D P (k + 1) (u k) from rfl,
      show a (k + 1) = embInf D P (k + 2) (u (k + 1)) from rfl,
      ← embInf.succ D P (k + 1) (u k)]
    exact embInf.monotone D P (k + 2)
      (by calc (P (k + 1)).incl (u k)
            = (P (k + 1)).incl ((P (k + 1)).retr (u (k + 1))) := by rw [hu k]
          _ ≤ u (k + 1) := (P (k + 1)).incl_retr_le _)
  have ha : Monotone a := monotone_nat_of_le_succ ha_succ
  have hprojTower : ∀ d n : ℕ,
      projectionAlongTower D P (show n + 1 ≤ n + d + 1 by omega) (u (n + d)) = u n :=
    by
    intro d
    induction d with
    | zero =>
        intro n
        simpa only [Nat.add_zero] using
          (projectionAlongTower.self D P (le_refl (n + 1)) (u n))
    | succ d ih =>
        intro n
        simp only [Nat.add_succ]
        rw [projectionAlongTower.succ D P
          (show n + 1 ≤ n + d + 1 by omega)
          (show n + 1 ≤ (n + d + 1) + 1 by omega)]
```

```
      rw [hu (n + d)]
      exact ih n
  have hprojection : ∀ d n : ℕ,
      (embInf D P (n + d + 1) (u (n + d))).1 (n + 1) = u n := by
    intro d n
    cases d with
    | zero =>
      change iComp D P (n + 1) (u n) (n + 1) = u n
      exact iComp.self D P (n + 1) (u n)
    | succ d =>
      change iComp D P (n + (d + 1) + 1) (u (n + (d + 1))) (n + 1) = u n
      rw [iComp.of_ge D P (by omega)]
      exact hprojTower (d + 1) n
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 ha.directed_le
  have hcont := (limitProjectionToLevel D P (n + 1)).preservesDirectedSup_coe
    (Set.range a) (Set.range_nonempty a) hdir
  rw [show (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P)
      = sSup (Set.range a) from sSup_range.symm]
  change (limitProjectionToLevel D P (n + 1)) (sSup (Set.range a)) = u n
  rw [hcont, ← Set.range_comp, sSup_range]
  apply le_antisymm
  · exact iSup_le fun m => by
      by_cases hmn : n ≤ m
      · obtain ⟨d, rfl⟩ := Nat.exists_eq_add_of_le hmn
        exact le_of_eq (hprojection d n)
      · exact le_trans ((ha (Nat.le_of_not_ge hmn)) (n + 1))
          (le_of_eq (hprojection 0 n))
  · exact le_trans (le_of_eq (hprojection 0 n).symm) (le_iSup (fun m => (a m).1 (n + 1)
    ) n)

end InverseLimit
end DomainTheory.ContinuousLattice
```

3

lemma_4_5.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.iComp
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.InverseLimits.projectionAlongTower
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit
```

```
variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]
variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

theorem lemma_4_5 (u : ∀ n, D (n + 1))
    (hu : ∀ n, (P (n + 1)).retr (u (n + 1)) = u n) (n : ℕ) :
    (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P).1 (n + 1) = u n := by
  let a : ℕ → InverseLimit D P := fun k => embInf D P (k + 1) (u k)
  have ha_succ (k : ℕ) : a k ≤ a (k + 1) := by
    rw [show a k = embInf D P (k + 1) (u k) from rfl,
      show a (k + 1) = embInf D P (k + 2) (u (k + 1)) from rfl,
      ← embInf.succ D P (k + 1) (u k)]
    exact embInf.monotone D P (k + 2)
      (by calc (P (k + 1)).incl (u k)
            = (P (k + 1)).incl ((P (k + 1)).retr (u (k + 1))) := by rw [hu k]
          _ ≤ u (k + 1) := (P (k + 1)).incl_retr_le _)
  have ha : Monotone a := monotone_nat_of_le_succ ha_succ
  have hprojTower : ∀ d n : ℕ,
      projectionAlongTower D P (show n + 1 ≤ n + d + 1 by omega) (u (n + d)) = u n :=
    by
    intro d
    induction d with
    | zero =>
        intro n
        simpa only [Nat.add_zero] using
          (projectionAlongTower.self D P (le_refl (n + 1)) (u n))
    | succ d ih =>
        intro n
        simp only [Nat.add_succ]
        rw [projectionAlongTower.succ D P
          (show n + 1 ≤ n + d + 1 by omega)
          (show n + 1 ≤ (n + d + 1) + 1 by omega)]
        rw [hu (n + d)]
        exact ih n
  have hprojection : ∀ d n : ℕ,
      (embInf D P (n + d + 1) (u (n + d))).1 (n + 1) = u n := by
    intro d n
    cases d with
    | zero =>
        change iComp D P (n + 1) (u n) (n + 1) = u n
        exact iComp.self D P (n + 1) (u n)
    | succ d =>
        change iComp D P (n + (d + 1) + 1) (u (n + (d + 1))) (n + 1) = u n
        rw [iComp.of_ge D P (by omega)]
        exact hprojTower (d + 1) n
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 ha.directed_le
  have hcont := (limitProjectionToLevel D P (n + 1)).preservesDirectedSup_coe
    (Set.range a) (Set.range_nonempty a) hdir
  rw [show (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P)
      = sSup (Set.range a) from sSup_range.symm]
  change (limitProjectionToLevel D P (n + 1)) (sSup (Set.range a)) = u n
  rw [hcont, ← Set.range_comp, sSup_range]
  apply le_antisymm
  · exact iSup_le fun m => by
      by_cases hmn : n ≤ m
```

```
      · obtain ⟨d, rfl⟩ := Nat.exists_eq_add_of_le hmn
        exact le_of_eq (hprojection d n)
      · exact le_trans ((ha (Nat.le_of_not_ge hmn)) (n + 1))
          (le_of_eq (hprojection 0 n))
  · exact le_trans (le_of_eq (hprojection 0 n).symm) (le_iSup (fun m => (a m).1 (n + 1)
    ) n)

end InverseLimit
end DomainTheory.ContinuousLattice
```

4

lemma_4_5.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.iComp
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.InverseLimits.projectionAlongTower
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]
variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

theorem lemma_4_5 (u : ∀ n, D (n + 1))
    (hu : ∀ n, (P (n + 1)).retr (u (n + 1)) = u n) (n : ℕ) :
    (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P).1 (n + 1) = u n := by
  let a : ℕ → InverseLimit D P := fun k => embInf D P (k + 1) (u k)
  have ha_succ (k : ℕ) : a k ≤ a (k + 1) := by
    rw [show a k = embInf D P (k + 1) (u k) from rfl,
      show a (k + 1) = embInf D P (k + 2) (u (k + 1)) from rfl,
      ← embInf.succ D P (k + 1) (u k)]
    exact embInf.monotone D P (k + 2)
      (by calc (P (k + 1)).incl (u k)
            = (P (k + 1)).incl ((P (k + 1)).retr (u (k + 1))) := by rw [hu k]
          _ ≤ u (k + 1) := (P (k + 1)).incl_retr_le _)
  have ha : Monotone a := monotone_nat_of_le_succ ha_succ
  have hprojTower : ∀ d n : ℕ,
      projectionAlongTower D P (show n + 1 ≤ n + d + 1 by omega) (u (n + d)) = u n :=
    by
    intro d
    induction d with
    | zero =>
        intro n
```

```
        simpa only [Nat.add_zero] using
          (projectionAlongTower.self D P (le_refl (n + 1)) (u n))
    | succ d ih =>
        intro n
        simp only [Nat.add_succ]
        rw [projectionAlongTower.succ D P
          (show n + 1 ≤ n + d + 1 by omega)
          (show n + 1 ≤ (n + d + 1) + 1 by omega)]
        rw [hu (n + d)]
        exact ih n
  have hprojection : ∀ d n : ℕ,
      (embInf D P (n + d + 1) (u (n + d))).1 (n + 1) = u n := by
    intro d n
    cases d with
    | zero =>
        change iComp D P (n + 1) (u n) (n + 1) = u n
        exact iComp.self D P (n + 1) (u n)
    | succ d =>
        change iComp D P (n + (d + 1) + 1) (u (n + (d + 1))) (n + 1) = u n
        rw [iComp.of_ge D P (by omega)]
        exact hprojTower (d + 1) n
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 ha.directed_le
  have hcont := (limitProjectionToLevel D P (n + 1)).preservesDirectedSup_coe
    (Set.range a) (Set.range_nonempty a) hdir
  rw [show (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P)
      = sSup (Set.range a) from sSup_range.symm]
  change (limitProjectionToLevel D P (n + 1)) (sSup (Set.range a)) = u n
  rw [hcont, ← Set.range_comp, sSup_range]
  apply le_antisymm
  · exact iSup_le fun m => by
      by_cases hmn : n ≤ m
      · obtain ⟨d, rfl⟩ := Nat.exists_eq_add_of_le hmn
        exact le_of_eq (hprojection d n)
      · exact le_trans ((ha (Nat.le_of_not_ge hmn)) (n + 1))
          (le_of_eq (hprojection 0 n))
  · exact le_trans (le_of_eq (hprojection 0 n).symm) (le_iSup (fun m => (a m).1 (n + 1)
    ) n)

end InverseLimit
end DomainTheory.ContinuousLattice
```

5

lemma_4_5.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.iComp
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.InverseLimits.projectionAlongTower
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]
variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

theorem lemma_4_5 (u : ∀ n, D (n + 1))
    (hu : ∀ n, (P (n + 1)).retr (u (n + 1)) = u n) (n : ℕ) :
    (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P).1 (n + 1) = u n := by
  let a : ℕ → InverseLimit D P := fun k => embInf D P (k + 1) (u k)
  have ha_succ (k : ℕ) : a k ≤ a (k + 1) := by
    rw [show a k = embInf D P (k + 1) (u k) from rfl,
      show a (k + 1) = embInf D P (k + 2) (u (k + 1)) from rfl,
      ← embInf.succ D P (k + 1) (u k)]
    exact embInf.monotone D P (k + 2)
      (by calc (P (k + 1)).incl (u k)
            = (P (k + 1)).incl ((P (k + 1)).retr (u (k + 1))) := by rw [hu k]
          _ ≤ u (k + 1) := (P (k + 1)).incl_retr_le _)
  have ha : Monotone a := monotone_nat_of_le_succ ha_succ
  have hprojTower : ∀ d n : ℕ,
      projectionAlongTower D P (show n + 1 ≤ n + d + 1 by omega) (u (n + d)) = u n :=
    by
    intro d
    induction d with
    | zero =>
        intro n
        simpa only [Nat.add_zero] using
          (projectionAlongTower.self D P (le_refl (n + 1)) (u n))
    | succ d ih =>
        intro n
        simp only [Nat.add_succ]
        rw [projectionAlongTower.succ D P
          (show n + 1 ≤ n + d + 1 by omega)
          (show n + 1 ≤ (n + d + 1) + 1 by omega)]
        rw [hu (n + d)]
        exact ih n
  have hprojection : ∀ d n : ℕ,
      (embInf D P (n + d + 1) (u (n + d))).1 (n + 1) = u n := by
    intro d n
    cases d with
    | zero =>
        change iComp D P (n + 1) (u n) (n + 1) = u n
        exact iComp.self D P (n + 1) (u n)
    | succ d =>
        change iComp D P (n + (d + 1) + 1) (u (n + (d + 1))) (n + 1) = u n
        rw [iComp.of_ge D P (by omega)]
        exact hprojTower (d + 1) n
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 ha.directed_le
  have hcont := (limitProjectionToLevel D P (n + 1)).preservesDirectedSup_coe
```

```
    (Set.range a) (Set.range_nonempty a) hdir
  rw [show (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P)
      = sSup (Set.range a) from sSup_range.symm]
  change (limitProjectionToLevel D P (n + 1)) (sSup (Set.range a)) = u n
  rw [hcont, ← Set.range_comp, sSup_range]
  apply le_antisymm
  · exact iSup_le fun m => by
      by_cases hmn : n ≤ m
      · obtain ⟨d, rfl⟩ := Nat.exists_eq_add_of_le hmn
        exact le_of_eq (hprojection d n)
      · exact le_trans ((ha (Nat.le_of_not_ge hmn)) (n + 1))
          (le_of_eq (hprojection 0 n))
  · exact le_trans (le_of_eq (hprojection 0 n).symm) (le_iSup (fun m => (a m).1 (n + 1)
    ) n)

end InverseLimit
end DomainTheory.ContinuousLattice
```

6

lemma_4_5.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.iComp
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.InverseLimits.projectionAlongTower
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]
variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

theorem lemma_4_5 (u : ∀ n, D (n + 1))
    (hu : ∀ n, (P (n + 1)).retr (u (n + 1)) = u n) (n : ℕ) :
    (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P).1 (n + 1) = u n := by
  let a : ℕ → InverseLimit D P := fun k => embInf D P (k + 1) (u k)
  have ha_succ (k : ℕ) : a k ≤ a (k + 1) := by
    rw [show a k = embInf D P (k + 1) (u k) from rfl,
      show a (k + 1) = embInf D P (k + 2) (u (k + 1)) from rfl,
      ← embInf.succ D P (k + 1) (u k)]
    exact embInf.monotone D P (k + 2)
      (by calc (P (k + 1)).incl (u k)
            = (P (k + 1)).incl ((P (k + 1)).retr (u (k + 1))) := by rw [hu k]
          _ ≤ u (k + 1) := (P (k + 1)).incl_retr_le _)
```

```
  have ha : Monotone a := monotone_nat_of_le_succ ha_succ
  have hprojTower : ∀ d n : ℕ,
      projectionAlongTower D P (show n + 1 ≤ n + d + 1 by omega) (u (n + d)) = u n :=
    by
     intro d
     induction d with
     | zero =>
         intro n
         simpa only [Nat.add_zero] using
           (projectionAlongTower.self D P (le_refl (n + 1)) (u n))
     | succ d ih =>
         intro n
         simp only [Nat.add_succ]
         rw [projectionAlongTower.succ D P
           (show n + 1 ≤ n + d + 1 by omega)
           (show n + 1 ≤ (n + d + 1) + 1 by omega)]
         rw [hu (n + d)]
         exact ih n
  have hprojection : ∀ d n : ℕ,
      (embInf D P (n + d + 1) (u (n + d))).1 (n + 1) = u n := by
    intro d n
    cases d with
    | zero =>
        change iComp D P (n + 1) (u n) (n + 1) = u n
        exact iComp.self D P (n + 1) (u n)
    | succ d =>
        change iComp D P (n + (d + 1) + 1) (u (n + (d + 1))) (n + 1) = u n
        rw [iComp.of_ge D P (by omega)]
        exact hprojTower (d + 1) n
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 ha.directed_le
  have hcont := (limitProjectionToLevel D P (n + 1)).preservesDirectedSup_coe
    (Set.range a) (Set.range_nonempty a) hdir
  rw [show (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P)
      = sSup (Set.range a) from sSup_range.symm]
  change (limitProjectionToLevel D P (n + 1)) (sSup (Set.range a)) = u n
  rw [hcont, ← Set.range_comp, sSup_range]
  apply le_antisymm
  · exact iSup_le fun m => by
      by_cases hmn : n ≤ m
      · obtain ⟨d, rfl⟩ := Nat.exists_eq_add_of_le hmn
        exact le_of_eq (hprojection d n)
      · exact le_trans ((ha (Nat.le_of_not_ge hmn)) (n + 1))
          (le_of_eq (hprojection 0 n))
  · exact le_trans (le_of_eq (hprojection 0 n).symm) (le_iSup (fun m => (a m).1 (n + 1)
    ) n)

end InverseLimit
end DomainTheory.ContinuousLattice
```

7

lemma_4_5.lean

```
module
```

```
public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.iComp
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.InverseLimits.projectionAlongTower
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]
variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

theorem lemma_4_5 (u : ∀ n, D (n + 1))
    (hu : ∀ n, (P (n + 1)).retr (u (n + 1)) = u n) (n : ℕ) :
    (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P).1 (n + 1) = u n := by
  let a : ℕ → InverseLimit D P := fun k => embInf D P (k + 1) (u k)
  have ha_succ (k : ℕ) : a k ≤ a (k + 1) := by
    rw [show a k = embInf D P (k + 1) (u k) from rfl,
      show a (k + 1) = embInf D P (k + 2) (u (k + 1)) from rfl,
      ← embInf.succ D P (k + 1) (u k)]
    exact embInf.monotone D P (k + 2)
      (by calc (P (k + 1)).incl (u k)
            = (P (k + 1)).incl ((P (k + 1)).retr (u (k + 1))) := by rw [hu k]
          _ ≤ u (k + 1) := (P (k + 1)).incl_retr_le _)
  have ha : Monotone a := monotone_nat_of_le_succ ha_succ
  have hprojTower : ∀ d n : ℕ,
      projectionAlongTower D P (show n + 1 ≤ n + d + 1 by omega) (u (n + d)) = u n :=
    by
    intro d
    induction d with
    | zero =>
        intro n
        simpa only [Nat.add_zero] using
          (projectionAlongTower.self D P (le_refl (n + 1)) (u n))
    | succ d ih =>
        intro n
        simp only [Nat.add_succ]
        rw [projectionAlongTower.succ D P
          (show n + 1 ≤ n + d + 1 by omega)
          (show n + 1 ≤ (n + d + 1) + 1 by omega)]
        rw [hu (n + d)]
        exact ih n
  have hprojection : ∀ d n : ℕ,
      (embInf D P (n + d + 1) (u (n + d))).1 (n + 1) = u n := by
    intro d n
    cases d with
    | zero =>
        change iComp D P (n + 1) (u n) (n + 1) = u n
```

```
        exact iComp.self D P (n + 1) (u n)
    | succ d =>
        change iComp D P (n + (d + 1) + 1) (u (n + (d + 1))) (n + 1) = u n
        rw [iComp.of_ge D P (by omega)]
        exact hprojTower (d + 1) n
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 ha.directed_le
  have hcont := (limitProjectionToLevel D P (n + 1)).preservesDirectedSup_coe
    (Set.range a) (Set.range_nonempty a) hdir
  rw [show (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P)
      = sSup (Set.range a) from sSup_range.symm]
  change (limitProjectionToLevel D P (n + 1)) (sSup (Set.range a)) = u n
  rw [hcont, ← Set.range_comp, sSup_range]
  apply le_antisymm
  · exact iSup_le fun m => by
      by_cases hmn : n ≤ m
      · obtain ⟨d, rfl⟩ := Nat.exists_eq_add_of_le hmn
        exact le_of_eq (hprojection d n)
      · exact le_trans ((ha (Nat.le_of_not_ge hmn)) (n + 1))
          (le_of_eq (hprojection 0 n))
  · exact le_trans (le_of_eq (hprojection 0 n).symm) (le_iSup (fun m => (a m).1 (n + 1)
    ) n)

end InverseLimit
end DomainTheory.ContinuousLattice
```


lemma_4_5.lean

```
module

public import DomainTheory.ContinuousLattice.InverseLimits.embInf
public import DomainTheory.ContinuousLattice.InverseLimits.iComp
public import DomainTheory.ContinuousLattice.InverseLimits.limitProjectionToLevel
public import DomainTheory.ContinuousLattice.InverseLimits.projectionAlongTower
public import Mathlib.Data.Set.Basic

public import DomainTheory.ContinuousLattice.FunctionSpaces.ScottMap
@[expose] public section

namespace DomainTheory.ContinuousLattice

open Set

universe u

section InverseLimit

variable (D : ℕ → Type u) [∀ n, CompleteLattice (D n)]
variable (P : ∀ n, ContinuousLatticeProjection (D n) (D (n + 1)))

theorem lemma_4_5 (u : ∀ n, D (n + 1))
    (hu : ∀ n, (P (n + 1)).retr (u (n + 1)) = u n) (n : ℕ) :
    (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P).1 (n + 1) = u n := by
  let a : ℕ → InverseLimit D P := fun k => embInf D P (k + 1) (u k)
```

```
  have ha_succ (k : ℕ) : a k ≤ a (k + 1) := by
    rw [show a k = embInf D P (k + 1) (u k) from rfl,
      show a (k + 1) = embInf D P (k + 2) (u (k + 1)) from rfl,
      ← embInf.succ D P (k + 1) (u k)]
    exact embInf.monotone D P (k + 2)
      (by calc (P (k + 1)).incl (u k)
            = (P (k + 1)).incl ((P (k + 1)).retr (u (k + 1))) := by rw [hu k]
          _ ≤ u (k + 1) := (P (k + 1)).incl_retr_le _)
  have ha : Monotone a := monotone_nat_of_le_succ ha_succ
  have hprojTower : ∀ d n : ℕ,
      projectionAlongTower D P (show n + 1 ≤ n + d + 1 by omega) (u (n + d)) = u n :=
    by
    intro d
    induction d with
    | zero =>
        intro n
        simpa only [Nat.add_zero] using
          (projectionAlongTower.self D P (le_refl (n + 1)) (u n))
    | succ d ih =>
        intro n
        simp only [Nat.add_succ]
        rw [projectionAlongTower.succ D P
          (show n + 1 ≤ n + d + 1 by omega)
          (show n + 1 ≤ (n + d + 1) + 1 by omega)]
        rw [hu (n + d)]
        exact ih n
  have hprojection : ∀ d n : ℕ,
      (embInf D P (n + d + 1) (u (n + d))).1 (n + 1) = u n := by
    intro d n
    cases d with
    | zero =>
        change iComp D P (n + 1) (u n) (n + 1) = u n
        exact iComp.self D P (n + 1) (u n)
    | succ d =>
        change iComp D P (n + (d + 1) + 1) (u (n + (d + 1))) (n + 1) = u n
        rw [iComp.of_ge D P (by omega)]
        exact hprojTower (d + 1) n
  have hdir : DirectedOn (· ≤ ·) (Set.range a) :=
    directedOn_range.2 ha.directed_le
  have hcont := (limitProjectionToLevel D P (n + 1)).preservesDirectedSup_coe
    (Set.range a) (Set.range_nonempty a) hdir
  rw [show (⋃ k, embInf D P (k + 1) (u k) : InverseLimit D P)
      = sSup (Set.range a) from sSup_range.symm]
  change (limitProjectionToLevel D P (n + 1)) (sSup (Set.range a)) = u n
  rw [hcont, ← Set.range_comp, sSup_range]
  apply le_antisymm
  · exact iSup_le fun m => by
      by_cases hmn : n ≤ m
      · obtain ⟨d, rfl⟩ := Nat.exists_eq_add_of_le hmn
        exact le_of_eq (hprojection d n)
      · exact le_trans ((ha (Nat.le_of_not_ge hmn)) (n + 1))
          (le_of_eq (hprojection 0 n))
  · exact le_trans (le_of_eq (hprojection 0 n).symm) (le_iSup (fun m => (a m).1 (n + 1)
    ) n)

end InverseLimit
```

```
end DomainTheory.ContinuousLattice
```

9

theorem_4_4_more.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.scottMapInducedPiTopology

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.scottTopology_homeomorph :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace :=
  @Homeomorph.mk (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace
    (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀))
    (embInfInf D₀ j₀).continuous (projInfInf D₀ j₀).continuous

end Thm44d

end LimitMaps

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))
```

```
noncomputable def theorem_4_4.sourceTopology_homeomorph
    (hTower : ∀ n, ContinuousLattice (towerType D₀ n)) :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
      (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
      (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀)) := by
  have hDInf : ContinuousLattice (DInf D₀ j₀) :=
    proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower
  rw [← inverseLimit.scottTopology_eq_induced_pi
        (towerType D₀) (towerProj D₀ j₀) hTower,
      ← scottMapInducedPiTopology.scottTopology_eq_inducedPi hDInf hDInf]
  exact theorem_4_4.scottTopology_homeomorph D₀ j₀

end Thm44d

end LimitMaps

end DomainTheory.ContinuousLattice
```

0

theorem_4_4_more.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.scottMapInducedPiTopology

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.scottTopology_homeomorph :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace :=
  @Homeomorph.mk (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace
    (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀))
    (embInfInf D₀ j₀).continuous (projInfInf D₀ j₀).continuous
```

```
end Thm44d

end LimitMaps

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.sourceTopology_homeomorph
    (hTower : ∀ n, ContinuousLattice (towerType D₀ n)) :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
      (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
      (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀)) := by
  have hDInf : ContinuousLattice (DInf D₀ j₀) :=
    proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower
  rw [← inverseLimit.scottTopology_eq_induced_pi
        (towerType D₀) (towerProj D₀ j₀) hTower,
      ← scottMapInducedPiTopology.scottTopology_eq_inducedPi hDInf hDInf]
  exact theorem_4_4.scottTopology_homeomorph D₀ j₀

end Thm44d

end LimitMaps

end DomainTheory.ContinuousLattice
```

1

theorem_4_4_more.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.scottMapInducedPiTopology

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
```

```
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.scottTopology_homeomorph :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace :=
  @Homeomorph.mk (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace
    (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀))
    (embInfInf D₀ j₀).continuous (projInfInf D₀ j₀).continuous

end Thm44d

end LimitMaps

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.sourceTopology_homeomorph
    (hTower : ∀ n, ContinuousLattice (towerType D₀ n)) :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
      (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
      (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀)) := by
  have hDInf : ContinuousLattice (DInf D₀ j₀) :=
    proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower
  rw [← inverseLimit.scottTopology_eq_induced_pi
        (towerType D₀) (towerProj D₀ j₀) hTower,
      ← scottMapInducedPiTopology.scottTopology_eq_inducedPi hDInf hDInf]
  exact theorem_4_4.scottTopology_homeomorph D₀ j₀

end Thm44d

end LimitMaps

end DomainTheory.ContinuousLattice
```

2

theorem_4_4_more.lean

```
module
```

```
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.scottMapInducedPiTopology

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.scottTopology_homeomorph :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace :=
  @Homeomorph.mk (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace
    (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀))
    (embInfInf D₀ j₀).continuous (projInfInf D₀ j₀).continuous

end Thm44d

end LimitMaps

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.sourceTopology_homeomorph
    (hTower : ∀ n, ContinuousLattice (towerType D₀ n)) :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
      (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
      (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀)) := by
  have hDInf : ContinuousLattice (DInf D₀ j₀) :=
    proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower
  rw [← inverseLimit.scottTopology_eq_induced_pi
```

```
        (towerType D₀) (towerProj D₀ j₀) hTower,
      ← scottMapInducedPiTopology.scottTopology_eq_inducedPi hDInf hDInf]
  exact theorem_4_4.scottTopology_homeomorph D₀ j₀

end Thm44d

end LimitMaps

end DomainTheory.ContinuousLattice
```

3

theorem_4_4_more.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.scottMapInducedPiTopology

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.scottTopology_homeomorph :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace :=
  @Homeomorph.mk (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace
    (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀))
    (embInfInf D₀ j₀).continuous (projInfInf D₀ j₀).continuous

end Thm44d

end LimitMaps

attribute [instance] CLat.str

section LimitMaps
```

```
variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.sourceTopology_homeomorph
    (hTower : ∀ n, ContinuousLattice (towerType D₀ n)) :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
      (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
      (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀)) := by
  have hDInf : ContinuousLattice (DInf D₀ j₀) :=
    proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower
  rw [← inverseLimit.scottTopology_eq_induced_pi
        (towerType D₀) (towerProj D₀ j₀) hTower,
      ← scottMapInducedPiTopology.scottTopology_eq_inducedPi hDInf hDInf]
  exact theorem_4_4.scottTopology_homeomorph D₀ j₀

end Thm44d

end LimitMaps

end DomainTheory.ContinuousLattice
```

4

theorem_4_4_more.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.scottMapInducedPiTopology

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.scottTopology_homeomorph :
```

```
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace :=
  @Homeomorph.mk (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace
    (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀))
    (embInfInf D₀ j₀).continuous (projInfInf D₀ j₀).continuous

end Thm44d

end LimitMaps

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.sourceTopology_homeomorph
    (hTower : ∀ n, ContinuousLattice (towerType D₀ n)) :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
      (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
      (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀)) := by
  have hDInf : ContinuousLattice (DInf D₀ j₀) :=
    proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower
  rw [← inverseLimit.scottTopology_eq_induced_pi
        (towerType D₀) (towerProj D₀ j₀) hTower,
      ← scottMapInducedPiTopology.scottTopology_eq_inducedPi hDInf hDInf]
  exact theorem_4_4.scottTopology_homeomorph D₀ j₀

end Thm44d

end LimitMaps

end DomainTheory.ContinuousLattice
```

5

theorem_4_4_more.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.scottMapInducedPiTopology

@[expose] public section
```

```
namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.scottTopology_homeomorph :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace :=
  @Homeomorph.mk (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace
    (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀))
    (embInfInf D₀ j₀).continuous (projInfInf D₀ j₀).continuous

end Thm44d

end LimitMaps

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.sourceTopology_homeomorph
    (hTower : ∀ n, ContinuousLattice (towerType D₀ n)) :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
      (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
      (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀)) := by
  have hDInf : ContinuousLattice (DInf D₀ j₀) :=
    proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower
  rw [← inverseLimit.scottTopology_eq_induced_pi
        (towerType D₀) (towerProj D₀ j₀) hTower,
      ← scottMapInducedPiTopology.scottTopology_eq_inducedPi hDInf hDInf]
  exact theorem_4_4.scottTopology_homeomorph D₀ j₀

end Thm44d

end LimitMaps
```

```
end DomainTheory.ContinuousLattice
```

6

theorem_4_4_more.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.scottMapInducedPiTopology

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.scottTopology_homeomorph :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace :=
  @Homeomorph.mk (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace
    (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀))
    (embInfInf D₀ j₀).continuous (projInfInf D₀ j₀).continuous

end Thm44d

end LimitMaps

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))
```

```
noncomputable def theorem_4_4.sourceTopology_homeomorph
    (hTower : ∀ n, ContinuousLattice (towerType D₀ n)) :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
      (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
      (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀)) := by
  have hDInf : ContinuousLattice (DInf D₀ j₀) :=
    proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower
  rw [← inverseLimit.scottTopology_eq_induced_pi
        (towerType D₀) (towerProj D₀ j₀) hTower,
      ← scottMapInducedPiTopology.scottTopology_eq_inducedPi hDInf hDInf]
  exact theorem_4_4.scottTopology_homeomorph D₀ j₀

end Thm44d

end LimitMaps

end DomainTheory.ContinuousLattice
```

7 theorem_4_4_more.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.scottMapInducedPiTopology

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.scottTopology_homeomorph :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace :=
  @Homeomorph.mk (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace
    (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀))
    (embInfInf D₀ j₀).continuous (projInfInf D₀ j₀).continuous
```

```
end Thm44d

end LimitMaps

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.sourceTopology_homeomorph
    (hTower : ∀ n, ContinuousLattice (towerType D₀ n)) :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
      (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
      (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀)) := by
  have hDInf : ContinuousLattice (DInf D₀ j₀) :=
    proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower
  rw [← inverseLimit.scottTopology_eq_induced_pi
        (towerType D₀) (towerProj D₀ j₀) hTower,
      ← scottMapInducedPiTopology.scottTopology_eq_inducedPi hDInf hDInf]
  exact theorem_4_4.scottTopology_homeomorph D₀ j₀

end Thm44d

end LimitMaps

end DomainTheory.ContinuousLattice
```

8

theorem_4_4_more.lean

```
module

public import DomainTheory.ContinuousLattice.FunctionSpaceTower.projInfInf
public import DomainTheory.ContinuousLattice.FunctionSpaceTower.embInfInf_projInfInf
public import DomainTheory.ContinuousLattice.WayBelow.ContinuousLattice
public import DomainTheory.ContinuousLattice.InverseLimits.inverseLimitTopology
public import DomainTheory.ContinuousLattice.InverseLimits.proposition_4_1
public import DomainTheory.ContinuousLattice.FunctionSpaces.scottMapInducedPiTopology

@[expose] public section

namespace DomainTheory.ContinuousLattice

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
```

```
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.scottTopology_homeomorph :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace :=
  @Homeomorph.mk (DInf D₀ j₀) (DInf.fn D₀ j₀) scottTopologicalSpace
    scottTopologicalSpace
    (Equiv.mk (embInfInf D₀ j₀) (projInfInf D₀ j₀)
      (projInfInf.embInfInf D₀ j₀) (embInfInf_projInfInf D₀ j₀))
    (embInfInf D₀ j₀).continuous (projInfInf D₀ j₀).continuous

end Thm44d

end LimitMaps

attribute [instance] CLat.str

section LimitMaps

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

section Thm44d

variable (D₀ : CLat.{u})
  (j₀ : ContinuousLatticeProjection D₀.carrier (ScottMap D₀.carrier D₀.carrier))

noncomputable def theorem_4_4.sourceTopology_homeomorph
    (hTower : ∀ n, ContinuousLattice (towerType D₀ n)) :
    @Homeomorph (DInf D₀ j₀) (DInf.fn D₀ j₀)
      (inverseLimitTopology (towerType D₀) (towerProj D₀ j₀))
      (scottMapInducedPiTopology (DInf D₀ j₀) (DInf D₀ j₀)) := by
  have hDInf : ContinuousLattice (DInf D₀ j₀) :=
    proposition_4_1 (towerType D₀) (towerProj D₀ j₀) hTower
  rw [← inverseLimit.scottTopology_eq_induced_pi
        (towerType D₀) (towerProj D₀ j₀) hTower,
      ← scottMapInducedPiTopology.scottTopology_eq_inducedPi hDInf hDInf]
  exact theorem_4_4.scottTopology_homeomorph D₀ j₀

end Thm44d

end LimitMaps

end DomainTheory.ContinuousLattice
```

9

Pomega.lean

```
module -- shake: keep-all
```

```
public import Mathlib.Data.Nat.Notation
public import Mathlib.Data.Set.Defs
public import Mathlib.Data.Set.Basic
public import Mathlib.Data.Set.Insert

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

abbrev Pomega := Set ℕ

def botElem : Pomega := ∅

def topElem : Pomega := Set.univ

@[simp] theorem mem_botElem (n : ℕ) : n ∈ botElem ↔ False := by simp [botElem]

@[simp] theorem mem_topElem (n : ℕ) : n ∈ topElem := Set.mem_univ n

namespace topElem

theorem pos : ∃ n, n + 1 ∈ topElem :=
  ⟨0, Set.mem_univ 1⟩

end topElem

end DomainTheory.DataTypesAsLattices
```

0

Pomega.lean

```
module -- shake: keep-all

public import Mathlib.Data.Nat.Notation
public import Mathlib.Data.Set.Defs
public import Mathlib.Data.Set.Basic
public import Mathlib.Data.Set.Insert

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

abbrev Pomega := Set ℕ

def botElem : Pomega := ∅

def topElem : Pomega := Set.univ

@[simp] theorem mem_botElem (n : ℕ) : n ∈ botElem ↔ False := by simp [botElem]

@[simp] theorem mem_topElem (n : ℕ) : n ∈ topElem := Set.mem_univ n

namespace topElem

theorem pos : ∃ n, n + 1 ∈ topElem :=
```

```
  ⟨0, Set.mem_univ 1⟩

end topElem

end DomainTheory.DataTypesAsLattices
```

1

Pomega.lean

```
module -- shake: keep-all

public import Mathlib.Data.Nat.Notation
public import Mathlib.Data.Set.Defs
public import Mathlib.Data.Set.Basic
public import Mathlib.Data.Set.Insert

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

abbrev Pomega := Set ℕ

def botElem : Pomega := ∅

def topElem : Pomega := Set.univ

@[simp] theorem mem_botElem (n : ℕ) : n ∈ botElem ↔ False := by simp [botElem]

@[simp] theorem mem_topElem (n : ℕ) : n ∈ topElem := Set.mem_univ n

namespace topElem

theorem pos : ∃ n, n + 1 ∈ topElem :=
  ⟨0, Set.mem_univ 1⟩

end topElem

end DomainTheory.DataTypesAsLattices
```

2

Pomega.lean

```
module -- shake: keep-all

public import Mathlib.Data.Nat.Notation
public import Mathlib.Data.Set.Defs
public import Mathlib.Data.Set.Basic
public import Mathlib.Data.Set.Insert

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

abbrev Pomega := Set ℕ
```

```
def botElem : Pomega := ∅

def topElem : Pomega := Set.univ

@[simp] theorem mem_botElem (n : ℕ) : n ∈ botElem ↔ False := by simp [botElem]

@[simp] theorem mem_topElem (n : ℕ) : n ∈ topElem := Set.mem_univ n

namespace topElem

theorem pos : ∃ n, n + 1 ∈ topElem :=
  ⟨0, Set.mem_univ 1⟩

end topElem

end DomainTheory.DataTypesAsLattices
```

3

Pomega.lean

```
module -- shake: keep-all

public import Mathlib.Data.Nat.Notation
public import Mathlib.Data.Set.Defs
public import Mathlib.Data.Set.Basic
public import Mathlib.Data.Set.Insert

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

abbrev Pomega := Set ℕ

def botElem : Pomega := ∅

def topElem : Pomega := Set.univ

@[simp] theorem mem_botElem (n : ℕ) : n ∈ botElem ↔ False := by simp [botElem]

@[simp] theorem mem_topElem (n : ℕ) : n ∈ topElem := Set.mem_univ n

namespace topElem

theorem pos : ∃ n, n + 1 ∈ topElem :=
  ⟨0, Set.mem_univ 1⟩

end topElem

end DomainTheory.DataTypesAsLattices
```

4

Pomega.lean

```
module -- shake: keep-all

public import Mathlib.Data.Nat.Notation
public import Mathlib.Data.Set.Defs
public import Mathlib.Data.Set.Basic
public import Mathlib.Data.Set.Insert

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

abbrev Pomega := Set ℕ

def botElem : Pomega := ∅

def topElem : Pomega := Set.univ

@[simp] theorem mem_botElem (n : ℕ) : n ∈ botElem ↔ False := by simp [botElem]

@[simp] theorem mem_topElem (n : ℕ) : n ∈ topElem := Set.mem_univ n

namespace topElem

theorem pos : ∃ n, n + 1 ∈ topElem :=
  ⟨0, Set.mem_univ 1⟩

end topElem

end DomainTheory.DataTypesAsLattices
```

5

Pomega.lean

```
module -- shake: keep-all

public import Mathlib.Data.Nat.Notation
public import Mathlib.Data.Set.Defs
public import Mathlib.Data.Set.Basic
public import Mathlib.Data.Set.Insert

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

abbrev Pomega := Set ℕ

def botElem : Pomega := ∅

def topElem : Pomega := Set.univ

@[simp] theorem mem_botElem (n : ℕ) : n ∈ botElem ↔ False := by simp [botElem]

@[simp] theorem mem_topElem (n : ℕ) : n ∈ topElem := Set.mem_univ n

namespace topElem
```

```
theorem pos : ∃ n, n + 1 ∈ topElem :=
  ⟨0, Set.mem_univ 1⟩

end topElem

end DomainTheory.DataTypesAsLattices
```

6

Pomega.lean

```
module -- shake: keep-all

public import Mathlib.Data.Nat.Notation
public import Mathlib.Data.Set.Defs
public import Mathlib.Data.Set.Basic
public import Mathlib.Data.Set.Insert

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

abbrev Pomega := Set ℕ

def botElem : Pomega := ∅

def topElem : Pomega := Set.univ

@[simp] theorem mem_botElem (n : ℕ) : n ∈ botElem ↔ False := by simp [botElem]

@[simp] theorem mem_topElem (n : ℕ) : n ∈ topElem := Set.mem_univ n

namespace topElem

theorem pos : ∃ n, n + 1 ∈ topElem :=
  ⟨0, Set.mem_univ 1⟩

end topElem

end DomainTheory.DataTypesAsLattices
```

7

Pomega.lean

```
module -- shake: keep-all

public import Mathlib.Data.Nat.Notation
public import Mathlib.Data.Set.Defs
public import Mathlib.Data.Set.Basic
public import Mathlib.Data.Set.Insert

@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
abbrev Pomega := Set ℕ

def botElem : Pomega := ∅

def topElem : Pomega := Set.univ

@[simp] theorem mem_botElem (n : ℕ) : n ∈ botElem ↔ False := by simp [botElem]

@[simp] theorem mem_topElem (n : ℕ) : n ∈ topElem := Set.mem_univ n

namespace topElem

theorem pos : ∃ n, n + 1 ∈ topElem :=
  ⟨0, Set.mem_univ 1⟩

end topElem

end DomainTheory.DataTypesAsLattices
```

8

Pomega.lean

```
module -- shake: keep-all

public import Mathlib.Data.Nat.Notation
public import Mathlib.Data.Set.Defs
public import Mathlib.Data.Set.Basic
public import Mathlib.Data.Set.Insert

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

abbrev Pomega := Set ℕ

def botElem : Pomega := ∅

def topElem : Pomega := Set.univ

@[simp] theorem mem_botElem (n : ℕ) : n ∈ botElem ↔ False := by simp [botElem]

@[simp] theorem mem_topElem (n : ℕ) : n ∈ topElem := Set.mem_univ n

namespace topElem

theorem pos : ∃ n, n + 1 ∈ topElem :=
  ⟨0, Set.mem_univ 1⟩

end topElem

end DomainTheory.DataTypesAsLattices
```

9

e.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.Pomega
public import Mathlib.Algebra.Group.Nat.Defs
import Mathlib.Algebra.GroupWithZero.Nat
public import Mathlib.Basic.Finite.Defs
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def e (n : ℕ) : Pomega := {k | n.testBit k}

namespace e

private theorem pow2_eq (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := by
  ext i
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_two_pow]

@[simp] theorem mem {n k : ℕ} : k ∈ e n ↔ n.testBit k := Iff.rfl

theorem zero : e 0 = ∅ := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e]

theorem pow2 (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := pow2_eq k

theorem or (n m : ℕ) : e (n ||| m) = e n ∪ e m := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_or]

theorem or_of_subset {n m : ℕ} {x : Pomega} (hn : e n ⊆ x) (hm : e m ⊆ x) : e (n ||| m
    ) ⊆ x := by
  rw [or]
  exact Set.union_subset hn hm

theorem le_two_pow (k : ℕ) : k ≤ 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k + 1 := Nat.succ_le_succ ih
      _ ≤ 2 ^ k + 2 ^ k := Nat.add_le_add_left Nat.one_le_two_pow _
      _ = 2 ^ k * 2 := (Nat.mul_two (2 ^ k)).symm
      _ = 2 ^ (k + 1) := (Nat.pow_succ 2 k).symm

theorem two_pow_le_of_testBit {n k : ℕ} (h : n.testBit k) : 2 ^ k ≤ n := by
  have hmod : (n >>> k) % 2 = 1 := by simpa [Nat.testBit] using h
  have hpos : 0 < n >>> k := Nat.pos_of_ne_zero fun hz => by simp [hz] at hmod
  have hdiv : 1 ≤ n / 2 ^ k := by
    rwa [Nat.shiftRight_eq_div_pow] at hpos
  simpa using (Nat.le_div_iff_mul_le (Nat.two_pow_pos k)).mp hdiv
```

```
theorem lt_two_pow' (k : ℕ) : k < 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k := Nat.succ_le_of_lt ih
      _ < 2 ^ k + 2 ^ k := Nat.lt_add_of_pos_right (Nat.two_pow_pos k)
      _ = 2 ^ (k + 1) := by rw [← Nat.two_mul, Nat.mul_comm, Nat.pow_succ]

theorem mem_le {n k : ℕ} (h : k ∈ e n) : k ≤ n :=
  (le_two_pow k).trans (two_pow_le_of_testBit h)

theorem mem_lt {n k : ℕ} (h : k ∈ e n) : k < n := by
  have hle := mem_le h
  rcases eq_or_lt_of_le hle with rfl | hlt
  · exact (lt_irrefl k ((lt_two_pow' k).trans_le (two_pow_le_of_testBit h))).elim
  · exact hlt

theorem finite (n : ℕ) : (_root_.DomainTheory.DataTypesAsLattices.e n : Pomega).Finite
    :=
  (Finset.range (n + 1)).finite_toSet.subset fun _k hk =>
    Finset.mem_range.mpr (Nat.lt_succ_of_le (mem_le hk))

end e

end DomainTheory.DataTypesAsLattices
```

0

e.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.Pomega
public import Mathlib.Algebra.Group.Nat.Defs
import Mathlib.Algebra.GroupWithZero.Nat
public import Mathlib.Basic.Finite.Defs
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def e (n : ℕ) : Pomega := {k | n.testBit k}

namespace e

private theorem pow2_eq (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := by
  ext i
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_two_pow]

@[simp] theorem mem {n k : ℕ} : k ∈ e n ↔ n.testBit k := Iff.rfl

theorem zero : e 0 = ∅ := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e]
```

```
theorem pow2 (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := pow2_eq k

theorem or (n m : ℕ) : e (n ||| m) = e n ∪ e m := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_or]

theorem or_of_subset {n m : ℕ} {x : Pomega} (hn : e n ⊆ x) (hm : e m ⊆ x) : e (n ||| m
    ) ⊆ x := by
  rw [or]
  exact Set.union_subset hn hm

theorem le_two_pow (k : ℕ) : k ≤ 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k + 1 := Nat.succ_le_succ ih
      _ ≤ 2 ^ k + 2 ^ k := Nat.add_le_add_left Nat.one_le_two_pow _
      _ = 2 ^ k * 2 := (Nat.mul_two (2 ^ k)).symm
      _ = 2 ^ (k + 1) := (Nat.pow_succ 2 k).symm

theorem two_pow_le_of_testBit {n k : ℕ} (h : n.testBit k) : 2 ^ k ≤ n := by
  have hmod : (n >>> k) % 2 = 1 := by simpa [Nat.testBit] using h
  have hpos : 0 < n >>> k := Nat.pos_of_ne_zero fun hz => by simp [hz] at hmod
  have hdiv : 1 ≤ n / 2 ^ k := by
    rwa [Nat.shiftRight_eq_div_pow] at hpos
  simpa using (Nat.le_div_iff_mul_le (Nat.two_pow_pos k)).mp hdiv

theorem lt_two_pow' (k : ℕ) : k < 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k := Nat.succ_le_of_lt ih
      _ < 2 ^ k + 2 ^ k := Nat.lt_add_of_pos_right (Nat.two_pow_pos k)
      _ = 2 ^ (k + 1) := by rw [← Nat.two_mul, Nat.mul_comm, Nat.pow_succ]

theorem mem_le {n k : ℕ} (h : k ∈ e n) : k ≤ n :=
  (le_two_pow k).trans (two_pow_le_of_testBit h)

theorem mem_lt {n k : ℕ} (h : k ∈ e n) : k < n := by
  have hle := mem_le h
  rcases eq_or_lt_of_le hle with rfl | hlt
  · exact (lt_irrefl k ((lt_two_pow' k).trans_le (two_pow_le_of_testBit h))).elim
  · exact hlt

theorem finite (n : ℕ) : (_root_.DomainTheory.DataTypesAsLattices.e n : Pomega).Finite
     :=
  (Finset.range (n + 1)).finite_toSet.subset fun _k hk =>
    Finset.mem_range.mpr (Nat.lt_succ_of_le (mem_le hk))

end e

end DomainTheory.DataTypesAsLattices
```

e.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.Pomega
public import Mathlib.Algebra.Group.Nat.Defs
import Mathlib.Algebra.GroupWithZero.Nat
public import Mathlib.Basic.Finite.Defs
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def e (n : ℕ) : Pomega := {k | n.testBit k}

namespace e

private theorem pow2_eq (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := by
  ext i
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_two_pow]

@[simp] theorem mem {n k : ℕ} : k ∈ e n ↔ n.testBit k := Iff.rfl

theorem zero : e 0 = ∅ := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e]

theorem pow2 (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := pow2_eq k

theorem or (n m : ℕ) : e (n ||| m) = e n ∪ e m := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_or]

theorem or_of_subset {n m : ℕ} {x : Pomega} (hn : e n ⊆ x) (hm : e m ⊆ x) : e (n ||| m
    ) ⊆ x := by
  rw [or]
  exact Set.union_subset hn hm

theorem le_two_pow (k : ℕ) : k ≤ 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k + 1 := Nat.succ_le_succ ih
      _ ≤ 2 ^ k + 2 ^ k := Nat.add_le_add_left Nat.one_le_two_pow _
      _ = 2 ^ k * 2 := (Nat.mul_two (2 ^ k)).symm
      _ = 2 ^ (k + 1) := (Nat.pow_succ 2 k).symm

theorem two_pow_le_of_testBit {n k : ℕ} (h : n.testBit k) : 2 ^ k ≤ n := by
  have hmod : (n >>> k) % 2 = 1 := by simpa [Nat.testBit] using h
  have hpos : 0 < n >>> k := Nat.pos_of_ne_zero fun hz => by simp [hz] at hmod
  have hdiv : 1 ≤ n / 2 ^ k := by
    rwa [Nat.shiftRight_eq_div_pow] at hpos
```

```
  simpa using (Nat.le_div_iff_mul_le (Nat.two_pow_pos k)).mp hdiv

theorem lt_two_pow' (k : ℕ) : k < 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k := Nat.succ_le_of_lt ih
      _ < 2 ^ k + 2 ^ k := Nat.lt_add_of_pos_right (Nat.two_pow_pos k)
      _ = 2 ^ (k + 1) := by rw [← Nat.two_mul, Nat.mul_comm, Nat.pow_succ]

theorem mem_le {n k : ℕ} (h : k ∈ e n) : k ≤ n :=
  (le_two_pow k).trans (two_pow_le_of_testBit h)

theorem mem_lt {n k : ℕ} (h : k ∈ e n) : k < n := by
  have hle := mem_le h
  rcases eq_or_lt_of_le hle with rfl | hlt
  · exact (lt_irrefl k ((lt_two_pow' k).trans_le (two_pow_le_of_testBit h))).elim
  · exact hlt

theorem finite (n : ℕ) : (_root_.DomainTheory.DataTypesAsLattices.e n : Pomega).Finite
    :=
  (Finset.range (n + 1)).finite_toSet.subset fun _k hk =>
    Finset.mem_range.mpr (Nat.lt_succ_of_le (mem_le hk))

end e

end DomainTheory.DataTypesAsLattices
```

2

e.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.Pomega
public import Mathlib.Algebra.Group.Nat.Defs
import Mathlib.Algebra.GroupWithZero.Nat
public import Mathlib.Basic.Finite.Defs
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def e (n : ℕ) : Pomega := {k | n.testBit k}

namespace e

private theorem pow2_eq (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := by
  ext i
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_two_pow]

@[simp] theorem mem {n k : ℕ} : k ∈ e n ↔ n.testBit k := Iff.rfl

theorem zero : e 0 = ∅ := by
```

```
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e]

theorem pow2 (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := pow2_eq k

theorem or (n m : ℕ) : e (n ||| m) = e n ∪ e m := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_or]

theorem or_of_subset {n m : ℕ} {x : Pomega} (hn : e n ⊆ x) (hm : e m ⊆ x) : e (n ||| m
    ) ⊆ x := by
  rw [or]
  exact Set.union_subset hn hm

theorem le_two_pow (k : ℕ) : k ≤ 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k + 1 := Nat.succ_le_succ ih
      _ ≤ 2 ^ k + 2 ^ k := Nat.add_le_add_left Nat.one_le_two_pow _
      _ = 2 ^ k * 2 := (Nat.mul_two (2 ^ k)).symm
      _ = 2 ^ (k + 1) := (Nat.pow_succ 2 k).symm

theorem two_pow_le_of_testBit {n k : ℕ} (h : n.testBit k) : 2 ^ k ≤ n := by
  have hmod : (n >>> k) % 2 = 1 := by simpa [Nat.testBit] using h
  have hpos : 0 < n >>> k := Nat.pos_of_ne_zero fun hz => by simp [hz] at hmod
  have hdiv : 1 ≤ n / 2 ^ k := by
    rwa [Nat.shiftRight_eq_div_pow] at hpos
  simpa using (Nat.le_div_iff_mul_le (Nat.two_pow_pos k)).mp hdiv

theorem lt_two_pow' (k : ℕ) : k < 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k := Nat.succ_le_of_lt ih
      _ < 2 ^ k + 2 ^ k := Nat.lt_add_of_pos_right (Nat.two_pow_pos k)
      _ = 2 ^ (k + 1) := by rw [← Nat.two_mul, Nat.mul_comm, Nat.pow_succ]

theorem mem_le {n k : ℕ} (h : k ∈ e n) : k ≤ n :=
  (le_two_pow k).trans (two_pow_le_of_testBit h)

theorem mem_lt {n k : ℕ} (h : k ∈ e n) : k < n := by
  have hle := mem_le h
  rcases eq_or_lt_of_le hle with rfl | hlt
  · exact (lt_irrefl k ((lt_two_pow' k).trans_le (two_pow_le_of_testBit h))).elim
  · exact hlt

theorem finite (n : ℕ) : (_root_.DomainTheory.DataTypesAsLattices.e n : Pomega).Finite
    :=
  (Finset.range (n + 1)).finite_toSet.subset fun _k hk =>
    Finset.mem_range.mpr (Nat.lt_succ_of_le (mem_le hk))

end e
```

```
end DomainTheory.DataTypesAsLattices
```

3

e.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.Pomega
public import Mathlib.Algebra.Group.Nat.Defs
import Mathlib.Algebra.GroupWithZero.Nat
public import Mathlib.Basic.Finite.Defs
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def e (n : ℕ) : Pomega := {k | n.testBit k}

namespace e

private theorem pow2_eq (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := by
  ext i
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_two_pow]

@[simp] theorem mem {n k : ℕ} : k ∈ e n ↔ n.testBit k := Iff.rfl

theorem zero : e 0 = ∅ := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e]

theorem pow2 (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := pow2_eq k

theorem or (n m : ℕ) : e (n ||| m) = e n ∪ e m := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_or]

theorem or_of_subset {n m : ℕ} {x : Pomega} (hn : e n ⊆ x) (hm : e m ⊆ x) : e (n ||| m
    ) ⊆ x := by
  rw [or]
  exact Set.union_subset hn hm

theorem le_two_pow (k : ℕ) : k ≤ 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k + 1 := Nat.succ_le_succ ih
      _ ≤ 2 ^ k + 2 ^ k := Nat.add_le_add_left Nat.one_le_two_pow _
      _ = 2 ^ k * 2 := (Nat.mul_two (2 ^ k)).symm
      _ = 2 ^ (k + 1) := (Nat.pow_succ 2 k).symm

theorem two_pow_le_of_testBit {n k : ℕ} (h : n.testBit k) : 2 ^ k ≤ n := by
  have hmod : (n >>> k) % 2 = 1 := by simpa [Nat.testBit] using h
  have hpos : 0 < n >>> k := Nat.pos_of_ne_zero fun hz => by simp [hz] at hmod
```

```
  have hdiv : 1 ≤ n / 2 ^ k := by
    rwa [Nat.shiftRight_eq_div_pow] at hpos
  simpa using (Nat.le_div_iff_mul_le (Nat.two_pow_pos k)).mp hdiv

theorem lt_two_pow' (k : ℕ) : k < 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k := Nat.succ_le_of_lt ih
      _ < 2 ^ k + 2 ^ k := Nat.lt_add_of_pos_right (Nat.two_pow_pos k)
      _ = 2 ^ (k + 1) := by rw [← Nat.two_mul, Nat.mul_comm, Nat.pow_succ]

theorem mem_le {n k : ℕ} (h : k ∈ e n) : k ≤ n :=
  (le_two_pow k).trans (two_pow_le_of_testBit h)

theorem mem_lt {n k : ℕ} (h : k ∈ e n) : k < n := by
  have hle := mem_le h
  rcases eq_or_lt_of_le hle with rfl | hlt
  · exact (lt_irrefl k ((lt_two_pow' k).trans_le (two_pow_le_of_testBit h))).elim
  · exact hlt

theorem finite (n : ℕ) : (_root_.DomainTheory.DataTypesAsLattices.e n : Pomega).Finite
    :=
  (Finset.range (n + 1)).finite_toSet.subset fun _k hk =>
    Finset.mem_range.mpr (Nat.lt_succ_of_le (mem_le hk))

end e

end DomainTheory.DataTypesAsLattices
```

4

e.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.Pomega
public import Mathlib.Algebra.Group.Nat.Defs
import Mathlib.Algebra.GroupWithZero.Nat
public import Mathlib.Basic.Finite.Defs
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def e (n : ℕ) : Pomega := {k | n.testBit k}

namespace e

private theorem pow2_eq (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := by
  ext i
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_two_pow]

@[simp] theorem mem {n k : ℕ} : k ∈ e n ↔ n.testBit k := Iff.rfl
```

```
theorem zero : e 0 = ∅ := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e]

theorem pow2 (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := pow2_eq k

theorem or (n m : ℕ) : e (n ||| m) = e n ∪ e m := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_or]

theorem or_of_subset {n m : ℕ} {x : Pomega} (hn : e n ⊆ x) (hm : e m ⊆ x) : e (n ||| m
    ) ⊆ x := by
  rw [or]
  exact Set.union_subset hn hm

theorem le_two_pow (k : ℕ) : k ≤ 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k + 1 := Nat.succ_le_succ ih
      _ ≤ 2 ^ k + 2 ^ k := Nat.add_le_add_left Nat.one_le_two_pow _
      _ = 2 ^ k * 2 := (Nat.mul_two (2 ^ k)).symm
      _ = 2 ^ (k + 1) := (Nat.pow_succ 2 k).symm

theorem two_pow_le_of_testBit {n k : ℕ} (h : n.testBit k) : 2 ^ k ≤ n := by
  have hmod : (n >>> k) % 2 = 1 := by simpa [Nat.testBit] using h
  have hpos : 0 < n >>> k := Nat.pos_of_ne_zero fun hz => by simp [hz] at hmod
  have hdiv : 1 ≤ n / 2 ^ k := by
    rwa [Nat.shiftRight_eq_div_pow] at hpos
  simpa using (Nat.le_div_iff_mul_le (Nat.two_pow_pos k)).mp hdiv

theorem lt_two_pow' (k : ℕ) : k < 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k := Nat.succ_le_of_lt ih
      _ < 2 ^ k + 2 ^ k := Nat.lt_add_of_pos_right (Nat.two_pow_pos k)
      _ = 2 ^ (k + 1) := by rw [← Nat.two_mul, Nat.mul_comm, Nat.pow_succ]

theorem mem_le {n k : ℕ} (h : k ∈ e n) : k ≤ n :=
  (le_two_pow k).trans (two_pow_le_of_testBit h)

theorem mem_lt {n k : ℕ} (h : k ∈ e n) : k < n := by
  have hle := mem_le h
  rcases eq_or_lt_of_le hle with rfl | hlt
  · exact (lt_irrefl k ((lt_two_pow' k).trans_le (two_pow_le_of_testBit h))).elim
  · exact hlt

theorem finite (n : ℕ) : (_root_.DomainTheory.DataTypesAsLattices.e n : Pomega).Finite
     :=
  (Finset.range (n + 1)).finite_toSet.subset fun _k hk =>
    Finset.mem_range.mpr (Nat.lt_succ_of_le (mem_le hk))
```

```
end e

end DomainTheory.DataTypesAsLattices
```

5

e.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.Pomega
public import Mathlib.Algebra.Group.Nat.Defs
import Mathlib.Algebra.GroupWithZero.Nat
public import Mathlib.Basic.Finite.Defs
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def e (n : ℕ) : Pomega := {k | n.testBit k}

namespace e

private theorem pow2_eq (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := by
  ext i
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_two_pow]

@[simp] theorem mem {n k : ℕ} : k ∈ e n ↔ n.testBit k := Iff.rfl

theorem zero : e 0 = ∅ := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e]

theorem pow2 (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := pow2_eq k

theorem or (n m : ℕ) : e (n ||| m) = e n ∪ e m := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_or]

theorem or_of_subset {n m : ℕ} {x : Pomega} (hn : e n ⊆ x) (hm : e m ⊆ x) : e (n ||| m
    ) ⊆ x := by
  rw [or]
  exact Set.union_subset hn hm

theorem le_two_pow (k : ℕ) : k ≤ 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k + 1 := Nat.succ_le_succ ih
      _ ≤ 2 ^ k + 2 ^ k := Nat.add_le_add_left Nat.one_le_two_pow _
      _ = 2 ^ k * 2 := (Nat.mul_two (2 ^ k)).symm
      _ = 2 ^ (k + 1) := (Nat.pow_succ 2 k).symm

theorem two_pow_le_of_testBit {n k : ℕ} (h : n.testBit k) : 2 ^ k ≤ n := by
```

```
  have hmod : (n >>> k) % 2 = 1 := by simpa [Nat.testBit] using h
  have hpos : 0 < n >>> k := Nat.pos_of_ne_zero fun hz => by simp [hz] at hmod
  have hdiv : 1 ≤ n / 2 ^ k := by
    rwa [Nat.shiftRight_eq_div_pow] at hpos
  simpa using (Nat.le_div_iff_mul_le (Nat.two_pow_pos k)).mp hdiv

theorem lt_two_pow' (k : ℕ) : k < 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k := Nat.succ_le_of_lt ih
      _ < 2 ^ k + 2 ^ k := Nat.lt_add_of_pos_right (Nat.two_pow_pos k)
      _ = 2 ^ (k + 1) := by rw [← Nat.two_mul, Nat.mul_comm, Nat.pow_succ]

theorem mem_le {n k : ℕ} (h : k ∈ e n) : k ≤ n :=
  (le_two_pow k).trans (two_pow_le_of_testBit h)

theorem mem_lt {n k : ℕ} (h : k ∈ e n) : k < n := by
  have hle := mem_le h
  rcases eq_or_lt_of_le hle with rfl | hlt
  · exact (lt_irrefl k ((lt_two_pow' k).trans_le (two_pow_le_of_testBit h))).elim
  · exact hlt

theorem finite (n : ℕ) : (_root_.DomainTheory.DataTypesAsLattices.e n : Pomega).Finite
    :=
  (Finset.range (n + 1)).finite_toSet.subset fun _k hk =>
    Finset.mem_range.mpr (Nat.lt_succ_of_le (mem_le hk))

end e

end DomainTheory.DataTypesAsLattices
```

6

e.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.Pomega
public import Mathlib.Algebra.Group.Nat.Defs
import Mathlib.Algebra.GroupWithZero.Nat
public import Mathlib.Basic.Finite.Defs
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def e (n : ℕ) : Pomega := {k | n.testBit k}

namespace e

private theorem pow2_eq (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := by
  ext i
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_two_pow]
```

```
@[simp] theorem mem {n k : ℕ} : k ∈ e n ↔ n.testBit k := Iff.rfl

theorem zero : e 0 = ∅ := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e]

theorem pow2 (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := pow2_eq k

theorem or (n m : ℕ) : e (n ||| m) = e n ∪ e m := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_or]

theorem or_of_subset {n m : ℕ} {x : Pomega} (hn : e n ⊆ x) (hm : e m ⊆ x) : e (n ||| m
    ) ⊆ x := by
  rw [or]
  exact Set.union_subset hn hm

theorem le_two_pow (k : ℕ) : k ≤ 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k + 1 := Nat.succ_le_succ ih
      _ ≤ 2 ^ k + 2 ^ k := Nat.add_le_add_left Nat.one_le_two_pow _
      _ = 2 ^ k * 2 := (Nat.mul_two (2 ^ k)).symm
      _ = 2 ^ (k + 1) := (Nat.pow_succ 2 k).symm

theorem two_pow_le_of_testBit {n k : ℕ} (h : n.testBit k) : 2 ^ k ≤ n := by
  have hmod : (n >>> k) % 2 = 1 := by simpa [Nat.testBit] using h
  have hpos : 0 < n >>> k := Nat.pos_of_ne_zero fun hz => by simp [hz] at hmod
  have hdiv : 1 ≤ n / 2 ^ k := by
    rwa [Nat.shiftRight_eq_div_pow] at hpos
  simpa using (Nat.le_div_iff_mul_le (Nat.two_pow_pos k)).mp hdiv

theorem lt_two_pow' (k : ℕ) : k < 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k := Nat.succ_le_of_lt ih
      _ < 2 ^ k + 2 ^ k := Nat.lt_add_of_pos_right (Nat.two_pow_pos k)
      _ = 2 ^ (k + 1) := by rw [← Nat.two_mul, Nat.mul_comm, Nat.pow_succ]

theorem mem_le {n k : ℕ} (h : k ∈ e n) : k ≤ n :=
  (le_two_pow k).trans (two_pow_le_of_testBit h)

theorem mem_lt {n k : ℕ} (h : k ∈ e n) : k < n := by
  have hle := mem_le h
  rcases eq_or_lt_of_le hle with rfl | hlt
  · exact (lt_irrefl k ((lt_two_pow' k).trans_le (two_pow_le_of_testBit h))).elim
  · exact hlt

theorem finite (n : ℕ) : (_root_.DomainTheory.DataTypesAsLattices.e n : Pomega).Finite
     :=
  (Finset.range (n + 1)).finite_toSet.subset fun _k hk =>
```

```
    Finset.mem_range.mpr (Nat.lt_succ_of_le (mem_le hk))

end e

end DomainTheory.DataTypesAsLattices
```

7

e.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.Pomega
public import Mathlib.Algebra.Group.Nat.Defs
import Mathlib.Algebra.GroupWithZero.Nat
public import Mathlib.Basic.Finite.Defs
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def e (n : ℕ) : Pomega := {k | n.testBit k}

namespace e

private theorem pow2_eq (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := by
  ext i
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_two_pow]

@[simp] theorem mem {n k : ℕ} : k ∈ e n ↔ n.testBit k := Iff.rfl

theorem zero : e 0 = ∅ := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e]

theorem pow2 (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := pow2_eq k

theorem or (n m : ℕ) : e (n ||| m) = e n ∪ e m := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_or]

theorem or_of_subset {n m : ℕ} {x : Pomega} (hn : e n ⊆ x) (hm : e m ⊆ x) : e (n ||| m
    ) ⊆ x := by
  rw [or]
  exact Set.union_subset hn hm

theorem le_two_pow (k : ℕ) : k ≤ 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k + 1 := Nat.succ_le_succ ih
      _ ≤ 2 ^ k + 2 ^ k := Nat.add_le_add_left Nat.one_le_two_pow _
      _ = 2 ^ k * 2 := (Nat.mul_two (2 ^ k)).symm
      _ = 2 ^ (k + 1) := (Nat.pow_succ 2 k).symm
```

```
theorem two_pow_le_of_testBit {n k : ℕ} (h : n.testBit k) : 2 ^ k ≤ n := by
  have hmod : (n >>> k) % 2 = 1 := by simpa [Nat.testBit] using h
  have hpos : 0 < n >>> k := Nat.pos_of_ne_zero fun hz => by simp [hz] at hmod
  have hdiv : 1 ≤ n / 2 ^ k := by
    rwa [Nat.shiftRight_eq_div_pow] at hpos
  simpa using (Nat.le_div_iff_mul_le (Nat.two_pow_pos k)).mp hdiv

theorem lt_two_pow' (k : ℕ) : k < 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k := Nat.succ_le_of_lt ih
      _ < 2 ^ k + 2 ^ k := Nat.lt_add_of_pos_right (Nat.two_pow_pos k)
      _ = 2 ^ (k + 1) := by rw [← Nat.two_mul, Nat.mul_comm, Nat.pow_succ]

theorem mem_le {n k : ℕ} (h : k ∈ e n) : k ≤ n :=
  (le_two_pow k).trans (two_pow_le_of_testBit h)

theorem mem_lt {n k : ℕ} (h : k ∈ e n) : k < n := by
  have hle := mem_le h
  rcases eq_or_lt_of_le hle with rfl | hlt
  · exact (lt_irrefl k ((lt_two_pow' k).trans_le (two_pow_le_of_testBit h))).elim
  · exact hlt

theorem finite (n : ℕ) : (_root_.DomainTheory.DataTypesAsLattices.e n : Pomega).Finite
    :=
  (Finset.range (n + 1)).finite_toSet.subset fun _k hk =>
    Finset.mem_range.mpr (Nat.lt_succ_of_le (mem_le hk))

end e

end DomainTheory.DataTypesAsLattices
```

8

e.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.Pomega
public import Mathlib.Algebra.Group.Nat.Defs
import Mathlib.Algebra.GroupWithZero.Nat
public import Mathlib.Basic.Finite.Defs
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def e (n : ℕ) : Pomega := {k | n.testBit k}

namespace e

private theorem pow2_eq (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := by
```

```
  ext i
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_two_pow]

@[simp] theorem mem {n k : ℕ} : k ∈ e n ↔ n.testBit k := Iff.rfl

theorem zero : e 0 = ∅ := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e]

theorem pow2 (k : ℕ) : e (2 ^ k) = ({k} : Pomega) := pow2_eq k

theorem or (n m : ℕ) : e (n ||| m) = e n ∪ e m := by
  ext k
  simp [_root_.DomainTheory.DataTypesAsLattices.e, Nat.testBit_or]

theorem or_of_subset {n m : ℕ} {x : Pomega} (hn : e n ⊆ x) (hm : e m ⊆ x) : e (n ||| m
    ) ⊆ x := by
  rw [or]
  exact Set.union_subset hn hm

theorem le_two_pow (k : ℕ) : k ≤ 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k + 1 := Nat.succ_le_succ ih
      _ ≤ 2 ^ k + 2 ^ k := Nat.add_le_add_left Nat.one_le_two_pow _
      _ = 2 ^ k * 2 := (Nat.mul_two (2 ^ k)).symm
      _ = 2 ^ (k + 1) := (Nat.pow_succ 2 k).symm

theorem two_pow_le_of_testBit {n k : ℕ} (h : n.testBit k) : 2 ^ k ≤ n := by
  have hmod : (n >>> k) % 2 = 1 := by simpa [Nat.testBit] using h
  have hpos : 0 < n >>> k := Nat.pos_of_ne_zero fun hz => by simp [hz] at hmod
  have hdiv : 1 ≤ n / 2 ^ k := by
    rwa [Nat.shiftRight_eq_div_pow] at hpos
  simpa using (Nat.le_div_iff_mul_le (Nat.two_pow_pos k)).mp hdiv

theorem lt_two_pow' (k : ℕ) : k < 2 ^ k := by
  induction k with
  | zero => decide
  | succ k ih =>
    calc
      k + 1 ≤ 2 ^ k := Nat.succ_le_of_lt ih
      _ < 2 ^ k + 2 ^ k := Nat.lt_add_of_pos_right (Nat.two_pow_pos k)
      _ = 2 ^ (k + 1) := by rw [← Nat.two_mul, Nat.mul_comm, Nat.pow_succ]

theorem mem_le {n k : ℕ} (h : k ∈ e n) : k ≤ n :=
  (le_two_pow k).trans (two_pow_le_of_testBit h)

theorem mem_lt {n k : ℕ} (h : k ∈ e n) : k < n := by
  have hle := mem_le h
  rcases eq_or_lt_of_le hle with rfl | hlt
  · exact (lt_irrefl k ((lt_two_pow' k).trans_le (two_pow_le_of_testBit h))).elim
  · exact hlt

theorem finite (n : ℕ) : (_root_.DomainTheory.DataTypesAsLattices.e n : Pomega).Finite
```

```
    :=
  (Finset.range (n + 1)).finite_toSet.subset fun _k hk =>
    Finset.mem_range.mpr (Nat.lt_succ_of_le (mem_le hk))

end e

end DomainTheory.DataTypesAsLattices
```

9

eScan.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Computability.Primrec.Basic

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

theorem primrec_twoPow : Primrec fun k : ℕ => 2 ^ k :=
  (Primrec.nat_rec' (f := id) (g := fun _ => (1 : ℕ))
    (h := fun (_ : ℕ) (p : ℕ × ℕ) => p.2 * 2)
    Primrec.id (Primrec.const 1)
    (show Primrec fun q : ℕ × ℕ × ℕ => q.2.2 * 2 from
      Primrec.nat_mul.comp (Primrec.snd.comp Primrec.snd) (Primrec.const 2))).of_eq
    fun k => by
      induction k with
      | zero => simp
      | succ k ih =>
        change (Nat.rec 1 (fun n IH => (n, IH).2 * 2) k) * 2 = 2 ^ (k + 1)
        have ih' : Nat.rec 1 (fun n IH => (n, IH).2 * 2) k = 2 ^ k := by
          simpa [id] using ih
        rw [ih', Nat.pow_succ, Nat.mul_comm]

theorem primrec_testBit : Primrec₂ fun n k : ℕ => n.testBit k :=
  (Primrec.eq.decide.comp
    (Primrec.nat_mod.comp
      (Primrec.nat_div.comp Primrec.fst (primrec_twoPow.comp Primrec.snd))
      (Primrec.const 2))
    (Primrec.const 1)).of_eq fun _p =>
      Nat.testBit_eq_decide_div_mod_eq.symm

theorem not_testBit_of_ge {n k : ℕ} (h : n ≤ k) : n.testBit k = false := by
  cases ht : n.testBit k with
  | false => rfl
  | true => exact (Nat.not_le_of_gt (e.mem_lt (e.mem.mpr ht)) h).elim

theorem primrecRel_testBit_true : PrimrecRel fun (n k : ℕ) => n.testBit k = true :=
  Primrec.eq.comp primrec_testBit (Primrec.const true)

namespace e
```

```
private abbrev Enc := _root_.DomainTheory.DataTypesAsLattices.e

private theorem mem_iff {n k : ℕ} : k ∈ Enc n ↔ n.testBit k := by
  rw [Enc, mem]

private def subsetBoolAux (n m fuel : ℕ) : Bool :=
  fuel.rec true fun k ih => ih && (!(n.testBit k) || m.testBit k)

def subsetBool (n m : ℕ) : Bool := subsetBoolAux n m n

private theorem subsetBoolAux_succ (n m fuel : ℕ) :
    subsetBoolAux n m (fuel + 1) =
      (subsetBoolAux n m fuel && (!(n.testBit fuel) || m.testBit fuel)) :=
  rfl

private theorem subsetBoolAux_iff (n m fuel : ℕ) :
    subsetBoolAux n m fuel = true ↔
      ∀ k < fuel, n.testBit k = true → m.testBit k = true := by
  induction fuel with
  | zero => simp [subsetBoolAux]
  | succ fuel ih =>
    rw [subsetBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ k hk
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hk) with hlt | rfl
      · exact h k hlt
      · intro hk'
        simp [hk'] at hb
        exact hb
    · intro h
      refine ⟨fun k hk => h k (Nat.lt_succ_of_lt hk), ?_⟩
      by_cases hk : n.testBit fuel = true
      · simp [h fuel (Nat.lt_succ_self fuel) hk]
      · simp [hk]

theorem subsetBool_iff (n m : ℕ) :
    subsetBool n m = true ↔ ∀ k, n.testBit k = true → m.testBit k = true := by
  rw [subsetBool, subsetBoolAux_iff]
  constructor
  · intro h k hk
    by_cases hkn : k < n
    · exact h k hkn hk
    · exact absurd hk (by simp [not_testBit_of_ge (Nat.le_of_not_gt hkn)])
  · intro h k _ hk
    exact h k hk

private def eqUnionBoolAux (n m k fuel : ℕ) : Bool :=
  fuel.rec true fun i ih => ih && (n.testBit i == (m.testBit i || k.testBit i))

def eqUnionBool (n m k : ℕ) : Bool := eqUnionBoolAux n m k (n + m + k + 1)

private theorem eqUnionBoolAux_succ (n m k fuel : ℕ) :
    eqUnionBoolAux n m k (fuel + 1) =
      (eqUnionBoolAux n m k fuel && (n.testBit fuel == (m.testBit fuel || k.testBit
    fuel))) :=
```

```
  rfl

private theorem eqUnionBoolAux_iff (n m k fuel : ℕ) :
    eqUnionBoolAux n m k fuel = true ↔
      ∀ i < fuel, n.testBit i = (m.testBit i || k.testBit i) := by
  induction fuel with
  | zero => simp [eqUnionBoolAux]
  | succ fuel ih =>
    rw [eqUnionBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ i hi
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hi) with hlt | rfl
      · exact h i hlt
      · simpa [beq_iff_eq] using hb
    · intro h
      refine ⟨fun i hi => h i (Nat.lt_succ_of_lt hi), ?_⟩
      simpa [beq_iff_eq] using h fuel (Nat.lt_succ_self fuel)

theorem eqUnionBool_iff (n m k : ℕ) :
    eqUnionBool n m k = true ↔ Enc n = Enc m ∪ Enc k := by
  rw [eqUnionBool, eqUnionBoolAux_iff]
  constructor
  · intro h
    ext i
    rw [mem_iff, Set.mem_union, mem_iff (n := m), mem_iff (n := k)]
    by_cases hi : i < n + m + k + 1
    · rw [h i hi]
      simp
    · have hle : n + m + k + 1 ≤ i := Nat.le_of_not_gt (by simpa [gt_iff_lt] using hi)
      have hn_le : n ≤ n + m + k + 1 := by simp [Nat.add_assoc]
      have hm_le : m ≤ n + m + k + 1 :=
        Nat.le_trans (Nat.le_add_left m n) (Nat.le_add_right (n + m) (k + 1))
      have hk_le : k ≤ n + m + k + 1 := by
        calc
          k ≤ n + m + 1 + k := Nat.le_add_left k (n + m + 1)
          _ = n + m + k + 1 := by
            rw [Nat.add_assoc (n + m) 1 k, Nat.add_comm 1 k, ← Nat.add_assoc (n + m) k
     1]
      have hn := not_testBit_of_ge (Nat.le_trans hn_le hle)
      have hm := not_testBit_of_ge (Nat.le_trans hm_le hle)
      have hk := not_testBit_of_ge (Nat.le_trans hk_le hle)
      simp [hn, hm, hk]
  · intro h i _
    have hmem : n.testBit i = true ↔ m.testBit i = true ∨ k.testBit i = true := by
      rw [← mem_iff, h, Set.mem_union, ← mem_iff (n := m), ← mem_iff (n := k)]
    cases hn : n.testBit i <;> cases hm : m.testBit i <;> cases hk : k.testBit i <;>
      simp [hn, hm, hk] at hmem ⊢

end e

theorem eSubsetBool_iff (n m : ℕ) :
    e.subsetBool n m = true ↔ e n ⊆ e m := by
  simp [Set.subset_def, e.mem, e.subsetBool_iff]

theorem eEqUnionBool_iff (n m k : ℕ) :
```

```
    e.eqUnionBool n m k = true ↔ e n = e m ∪ e k :=
  e.eqUnionBool_iff n m k

theorem primrec_e_subsetBool : Primrec₂ e.subsetBool := by
  have hstep : Primrec₂ fun (p : ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (!(p.1.testBit nih.1) || p.2.testBit nih.1) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.or.comp
        (Primrec.not.comp
          (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp
    Primrec.snd)))
        (primrec_testBit.comp (Primrec.snd.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd)))
  exact (Primrec.nat_rec' Primrec.fst (Primrec.const true) hstep).of_eq fun _ => rfl

theorem primrec_e_eqUnionBool : Primrec fun t : ℕ × ℕ × ℕ =>
    e.eqUnionBool t.1 t.2.1 t.2.2 := by
  have hbound : Primrec fun t : ℕ × ℕ × ℕ => t.1 + t.2.1 + t.2.2 + 1 :=
    Primrec.succ.comp
      (Primrec.nat_add.comp
        (Primrec.nat_add.comp Primrec.fst (Primrec.fst.comp Primrec.snd))
        (Primrec.snd.comp Primrec.snd))
  have hstep : Primrec₂ fun (p : ℕ × ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (p.1.testBit nih.1 == (p.2.1.testBit nih.1 || p.2.2.testBit nih.1)) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.beq.comp
        (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd))
        (Primrec.or.comp
          (primrec_testBit.comp
            (Primrec.fst.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))
          (primrec_testBit.comp
            (Primrec.snd.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))))
  exact (Primrec.nat_rec' hbound (Primrec.const true) hstep).of_eq fun _ => rfl

end DomainTheory.DataTypesAsLattices
```

0

eScan.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Computability.Primrec.Basic

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

theorem primrec_twoPow : Primrec fun k : ℕ => 2 ^ k :=
  (Primrec.nat_rec' (f := id) (g := fun _ => (1 : ℕ))
```

```
    (h := fun (_ : ℕ) (p : ℕ × ℕ) => p.2 * 2)
    Primrec.id (Primrec.const 1)
    (show Primrec fun q : ℕ × ℕ × ℕ => q.2.2 * 2 from
      Primrec.nat_mul.comp (Primrec.snd.comp Primrec.snd) (Primrec.const 2))).of_eq
    fun k => by
      induction k with
      | zero => simp
      | succ k ih =>
        change (Nat.rec 1 (fun n IH => (n, IH).2 * 2) k) * 2 = 2 ^ (k + 1)
        have ih' : Nat.rec 1 (fun n IH => (n, IH).2 * 2) k = 2 ^ k := by
          simpa [id] using ih
        rw [ih', Nat.pow_succ, Nat.mul_comm]

theorem primrec_testBit : Primrec₂ fun n k : ℕ => n.testBit k :=
  (Primrec.eq.decide.comp
    (Primrec.nat_mod.comp
      (Primrec.nat_div.comp Primrec.fst (primrec_twoPow.comp Primrec.snd))
      (Primrec.const 2))
    (Primrec.const 1)).of_eq fun _p =>
      Nat.testBit_eq_decide_div_mod_eq.symm

theorem not_testBit_of_ge {n k : ℕ} (h : n ≤ k) : n.testBit k = false := by
  cases ht : n.testBit k with
  | false => rfl
  | true => exact (Nat.not_le_of_gt (e.mem_lt (e.mem.mpr ht)) h).elim

theorem primrecRel_testBit_true : PrimrecRel fun (n k : ℕ) => n.testBit k = true :=
  Primrec.eq.comp primrec_testBit (Primrec.const true)

namespace e

private abbrev Enc := _root_.DomainTheory.DataTypesAsLattices.e

private theorem mem_iff {n k : ℕ} : k ∈ Enc n ↔ n.testBit k := by
  rw [Enc, mem]

private def subsetBoolAux (n m fuel : ℕ) : Bool :=
  fuel.rec true fun k ih => ih && (!(n.testBit k) || m.testBit k)

def subsetBool (n m : ℕ) : Bool := subsetBoolAux n m n

private theorem subsetBoolAux_succ (n m fuel : ℕ) :
    subsetBoolAux n m (fuel + 1) =
      (subsetBoolAux n m fuel && (!(n.testBit fuel) || m.testBit fuel)) :=
  rfl

private theorem subsetBoolAux_iff (n m fuel : ℕ) :
    subsetBoolAux n m fuel = true ↔
      ∀ k < fuel, n.testBit k = true → m.testBit k = true := by
  induction fuel with
  | zero => simp [subsetBoolAux]
  | succ fuel ih =>
    rw [subsetBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ k hk
```

```
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hk) with hlt | rfl
      · exact h k hlt
      · intro hk'
        simp [hk'] at hb
        exact hb
    · intro h
      refine ⟨fun k hk => h k (Nat.lt_succ_of_lt hk), ?_⟩
      by_cases hk : n.testBit fuel = true
      · simp [h fuel (Nat.lt_succ_self fuel) hk]
      · simp [hk]

theorem subsetBool_iff (n m : ℕ) :
    subsetBool n m = true ↔ ∀ k, n.testBit k = true → m.testBit k = true := by
  rw [subsetBool, subsetBoolAux_iff]
  constructor
  · intro h k hk
    by_cases hkn : k < n
    · exact h k hkn hk
    · exact absurd hk (by simp [not_testBit_of_ge (Nat.le_of_not_gt hkn)])
  · intro h k _ hk
    exact h k hk

private def eqUnionBoolAux (n m k fuel : ℕ) : Bool :=
  fuel.rec true fun i ih => ih && (n.testBit i == (m.testBit i || k.testBit i))

def eqUnionBool (n m k : ℕ) : Bool := eqUnionBoolAux n m k (n + m + k + 1)

private theorem eqUnionBoolAux_succ (n m k fuel : ℕ) :
    eqUnionBoolAux n m k (fuel + 1) =
      (eqUnionBoolAux n m k fuel && (n.testBit fuel == (m.testBit fuel || k.testBit
    fuel))) :=
  rfl

private theorem eqUnionBoolAux_iff (n m k fuel : ℕ) :
    eqUnionBoolAux n m k fuel = true ↔
      ∀ i < fuel, n.testBit i = (m.testBit i || k.testBit i) := by
  induction fuel with
  | zero => simp [eqUnionBoolAux]
  | succ fuel ih =>
    rw [eqUnionBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ i hi
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hi) with hlt | rfl
      · exact h i hlt
      · simpa [beq_iff_eq] using hb
    · intro h
      refine ⟨fun i hi => h i (Nat.lt_succ_of_lt hi), ?_⟩
      simpa [beq_iff_eq] using h fuel (Nat.lt_succ_self fuel)

theorem eqUnionBool_iff (n m k : ℕ) :
    eqUnionBool n m k = true ↔ Enc n = Enc m ∪ Enc k := by
  rw [eqUnionBool, eqUnionBoolAux_iff]
  constructor
  · intro h
    ext i
```

```
    rw [mem_iff, Set.mem_union, mem_iff (n := m), mem_iff (n := k)]
    by_cases hi : i < n + m + k + 1
    · rw [h i hi]
      simp
    · have hle : n + m + k + 1 ≤ i := Nat.le_of_not_gt (by simpa [gt_iff_lt] using hi)
      have hn_le : n ≤ n + m + k + 1 := by simp [Nat.add_assoc]
      have hm_le : m ≤ n + m + k + 1 :=
        Nat.le_trans (Nat.le_add_left m n) (Nat.le_add_right (n + m) (k + 1))
      have hk_le : k ≤ n + m + k + 1 := by
        calc
          k ≤ n + m + 1 + k := Nat.le_add_left k (n + m + 1)
          _ = n + m + k + 1 := by
            rw [Nat.add_assoc (n + m) 1 k, Nat.add_comm 1 k, ← Nat.add_assoc (n + m) k
     1]
      have hn := not_testBit_of_ge (Nat.le_trans hn_le hle)
      have hm := not_testBit_of_ge (Nat.le_trans hm_le hle)
      have hk := not_testBit_of_ge (Nat.le_trans hk_le hle)
      simp [hn, hm, hk]
  · intro h i _
    have hmem : n.testBit i = true ↔ m.testBit i = true ∨ k.testBit i = true := by
      rw [← mem_iff, h, Set.mem_union, ← mem_iff (n := m), ← mem_iff (n := k)]
    cases hn : n.testBit i <;> cases hm : m.testBit i <;> cases hk : k.testBit i <;>
      simp [hn, hm, hk] at hmem ⊢

end e

theorem eSubsetBool_iff (n m : ℕ) :
    e.subsetBool n m = true ↔ e n ⊆ e m := by
  simp [Set.subset_def, e.mem, e.subsetBool_iff]

theorem eEqUnionBool_iff (n m k : ℕ) :
    e.eqUnionBool n m k = true ↔ e n = e m ∪ e k :=
  e.eqUnionBool_iff n m k

theorem primrec_e_subsetBool : Primrec₂ e.subsetBool := by
  have hstep : Primrec₂ fun (p : ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (!(p.1.testBit nih.1) || p.2.testBit nih.1) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.or.comp
        (Primrec.not.comp
          (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp
    Primrec.snd)))
        (primrec_testBit.comp (Primrec.snd.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd)))
  exact (Primrec.nat_rec' Primrec.fst (Primrec.const true) hstep).of_eq fun _ => rfl

theorem primrec_e_eqUnionBool : Primrec fun t : ℕ × ℕ × ℕ =>
    e.eqUnionBool t.1 t.2.1 t.2.2 := by
  have hbound : Primrec fun t : ℕ × ℕ × ℕ => t.1 + t.2.1 + t.2.2 + 1 :=
    Primrec.succ.comp
      (Primrec.nat_add.comp
        (Primrec.nat_add.comp Primrec.fst (Primrec.fst.comp Primrec.snd))
        (Primrec.snd.comp Primrec.snd))
  have hstep : Primrec₂ fun (p : ℕ × ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (p.1.testBit nih.1 == (p.2.1.testBit nih.1 || p.2.2.testBit nih.1)) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
```

```
      (Primrec.beq.comp
        (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd))
        (Primrec.or.comp
          (primrec_testBit.comp
            (Primrec.fst.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))
          (primrec_testBit.comp
            (Primrec.snd.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))))
  exact (Primrec.nat_rec' hbound (Primrec.const true) hstep).of_eq fun _ => rfl

end DomainTheory.DataTypesAsLattices
```

1

eScan.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Computability.Primrec.Basic

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

theorem primrec_twoPow : Primrec fun k : ℕ => 2 ^ k :=
  (Primrec.nat_rec' (f := id) (g := fun _ => (1 : ℕ))
    (h := fun (_ : ℕ) (p : ℕ × ℕ) => p.2 * 2)
    Primrec.id (Primrec.const 1)
    (show Primrec fun q : ℕ × ℕ × ℕ => q.2.2 * 2 from
      Primrec.nat_mul.comp (Primrec.snd.comp Primrec.snd) (Primrec.const 2))).of_eq
    fun k => by
      induction k with
      | zero => simp
      | succ k ih =>
        change (Nat.rec 1 (fun n IH => (n, IH).2 * 2) k) * 2 = 2 ^ (k + 1)
        have ih' : Nat.rec 1 (fun n IH => (n, IH).2 * 2) k = 2 ^ k := by
          simpa [id] using ih
        rw [ih', Nat.pow_succ, Nat.mul_comm]

theorem primrec_testBit : Primrec₂ fun n k : ℕ => n.testBit k :=
  (Primrec.eq.decide.comp
    (Primrec.nat_mod.comp
      (Primrec.nat_div.comp Primrec.fst (primrec_twoPow.comp Primrec.snd))
      (Primrec.const 2))
    (Primrec.const 1)).of_eq fun _p =>
      Nat.testBit_eq_decide_div_mod_eq.symm

theorem not_testBit_of_ge {n k : ℕ} (h : n ≤ k) : n.testBit k = false := by
  cases ht : n.testBit k with
  | false => rfl
  | true => exact (Nat.not_le_of_gt (e.mem_lt (e.mem.mpr ht)) h).elim
```

```
theorem primrecRel_testBit_true : PrimrecRel fun (n k : ℕ) => n.testBit k = true :=
  Primrec.eq.comp primrec_testBit (Primrec.const true)

namespace e

private abbrev Enc := _root_.DomainTheory.DataTypesAsLattices.e

private theorem mem_iff {n k : ℕ} : k ∈ Enc n ↔ n.testBit k := by
  rw [Enc, mem]

private def subsetBoolAux (n m fuel : ℕ) : Bool :=
  fuel.rec true fun k ih => ih && (!(n.testBit k) || m.testBit k)

def subsetBool (n m : ℕ) : Bool := subsetBoolAux n m n

private theorem subsetBoolAux_succ (n m fuel : ℕ) :
    subsetBoolAux n m (fuel + 1) =
      (subsetBoolAux n m fuel && (!(n.testBit fuel) || m.testBit fuel)) :=
  rfl

private theorem subsetBoolAux_iff (n m fuel : ℕ) :
    subsetBoolAux n m fuel = true ↔
      ∀ k < fuel, n.testBit k = true → m.testBit k = true := by
  induction fuel with
  | zero => simp [subsetBoolAux]
  | succ fuel ih =>
    rw [subsetBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ k hk
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hk) with hlt | rfl
      · exact h k hlt
      · intro hk'
        simp [hk'] at hb
        exact hb
    · intro h
      refine ⟨fun k hk => h k (Nat.lt_succ_of_lt hk), ?_⟩
      by_cases hk : n.testBit fuel = true
      · simp [h fuel (Nat.lt_succ_self fuel) hk]
      · simp [hk]

theorem subsetBool_iff (n m : ℕ) :
    subsetBool n m = true ↔ ∀ k, n.testBit k = true → m.testBit k = true := by
  rw [subsetBool, subsetBoolAux_iff]
  constructor
  · intro h k hk
    by_cases hkn : k < n
    · exact h k hkn hk
    · exact absurd hk (by simp [not_testBit_of_ge (Nat.le_of_not_gt hkn)])
  · intro h k _ hk
    exact h k hk

private def eqUnionBoolAux (n m k fuel : ℕ) : Bool :=
  fuel.rec true fun i ih => ih && (n.testBit i == (m.testBit i || k.testBit i))
```

```
def eqUnionBool (n m k : ℕ) : Bool := eqUnionBoolAux n m k (n + m + k + 1)

private theorem eqUnionBoolAux_succ (n m k fuel : ℕ) :
    eqUnionBoolAux n m k (fuel + 1) =
      (eqUnionBoolAux n m k fuel && (n.testBit fuel == (m.testBit fuel || k.testBit
    fuel))) :=
  rfl

private theorem eqUnionBoolAux_iff (n m k fuel : ℕ) :
    eqUnionBoolAux n m k fuel = true ↔
      ∀ i < fuel, n.testBit i = (m.testBit i || k.testBit i) := by
  induction fuel with
  | zero => simp [eqUnionBoolAux]
  | succ fuel ih =>
    rw [eqUnionBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ i hi
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hi) with hlt | rfl
      · exact h i hlt
      · simpa [beq_iff_eq] using hb
    · intro h
      refine ⟨fun i hi => h i (Nat.lt_succ_of_lt hi), ?_⟩
      simpa [beq_iff_eq] using h fuel (Nat.lt_succ_self fuel)

theorem eqUnionBool_iff (n m k : ℕ) :
    eqUnionBool n m k = true ↔ Enc n = Enc m ∪ Enc k := by
  rw [eqUnionBool, eqUnionBoolAux_iff]
  constructor
  · intro h
    ext i
    rw [mem_iff, Set.mem_union, mem_iff (n := m), mem_iff (n := k)]
    by_cases hi : i < n + m + k + 1
    · rw [h i hi]
      simp
    · have hle : n + m + k + 1 ≤ i := Nat.le_of_not_gt (by simpa [gt_iff_lt] using hi)
      have hn_le : n ≤ n + m + k + 1 := by simp [Nat.add_assoc]
      have hm_le : m ≤ n + m + k + 1 :=
        Nat.le_trans (Nat.le_add_left m n) (Nat.le_add_right (n + m) (k + 1))
      have hk_le : k ≤ n + m + k + 1 := by
        calc
          k ≤ n + m + 1 + k := Nat.le_add_left k (n + m + 1)
          _ = n + m + k + 1 := by
            rw [Nat.add_assoc (n + m) 1 k, Nat.add_comm 1 k, ← Nat.add_assoc (n + m) k
     1]
      have hn := not_testBit_of_ge (Nat.le_trans hn_le hle)
      have hm := not_testBit_of_ge (Nat.le_trans hm_le hle)
      have hk := not_testBit_of_ge (Nat.le_trans hk_le hle)
      simp [hn, hm, hk]
  · intro h i _
    have hmem : n.testBit i = true ↔ m.testBit i = true ∨ k.testBit i = true := by
      rw [← mem_iff, h, Set.mem_union, ← mem_iff (n := m), ← mem_iff (n := k)]
    cases hn : n.testBit i <;> cases hm : m.testBit i <;> cases hk : k.testBit i <;>
      simp [hn, hm, hk] at hmem ⊢

end e
```

```
theorem eSubsetBool_iff (n m : ℕ) :
    e.subsetBool n m = true ↔ e n ⊆ e m := by
  simp [Set.subset_def, e.mem, e.subsetBool_iff]

theorem eEqUnionBool_iff (n m k : ℕ) :
    e.eqUnionBool n m k = true ↔ e n = e m ∪ e k :=
  e.eqUnionBool_iff n m k

theorem primrec_e_subsetBool : Primrec₂ e.subsetBool := by
  have hstep : Primrec₂ fun (p : ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (!(p.1.testBit nih.1) || p.2.testBit nih.1) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.or.comp
        (Primrec.not.comp
          (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp
    Primrec.snd)))
        (primrec_testBit.comp (Primrec.snd.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd)))
  exact (Primrec.nat_rec' Primrec.fst (Primrec.const true) hstep).of_eq fun _ => rfl

theorem primrec_e_eqUnionBool : Primrec fun t : ℕ × ℕ × ℕ =>
    e.eqUnionBool t.1 t.2.1 t.2.2 := by
  have hbound : Primrec fun t : ℕ × ℕ × ℕ => t.1 + t.2.1 + t.2.2 + 1 :=
    Primrec.succ.comp
      (Primrec.nat_add.comp
        (Primrec.nat_add.comp Primrec.fst (Primrec.fst.comp Primrec.snd))
        (Primrec.snd.comp Primrec.snd))
  have hstep : Primrec₂ fun (p : ℕ × ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (p.1.testBit nih.1 == (p.2.1.testBit nih.1 || p.2.2.testBit nih.1)) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.beq.comp
        (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd))
        (Primrec.or.comp
          (primrec_testBit.comp
            (Primrec.fst.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))
          (primrec_testBit.comp
            (Primrec.snd.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))))
  exact (Primrec.nat_rec' hbound (Primrec.const true) hstep).of_eq fun _ => rfl

end DomainTheory.DataTypesAsLattices
```

2

eScan.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Computability.Primrec.Basic

@[expose] public section
```

```
set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

theorem primrec_twoPow : Primrec fun k : ℕ => 2 ^ k :=
  (Primrec.nat_rec' (f := id) (g := fun _ => (1 : ℕ))
    (h := fun (_ : ℕ) (p : ℕ × ℕ) => p.2 * 2)
    Primrec.id (Primrec.const 1)
    (show Primrec fun q : ℕ × ℕ × ℕ => q.2.2 * 2 from
      Primrec.nat_mul.comp (Primrec.snd.comp Primrec.snd) (Primrec.const 2))).of_eq
    fun k => by
      induction k with
      | zero => simp
      | succ k ih =>
        change (Nat.rec 1 (fun n IH => (n, IH).2 * 2) k) * 2 = 2 ^ (k + 1)
        have ih' : Nat.rec 1 (fun n IH => (n, IH).2 * 2) k = 2 ^ k := by
          simpa [id] using ih
        rw [ih', Nat.pow_succ, Nat.mul_comm]

theorem primrec_testBit : Primrec₂ fun n k : ℕ => n.testBit k :=
  (Primrec.eq.decide.comp
    (Primrec.nat_mod.comp
      (Primrec.nat_div.comp Primrec.fst (primrec_twoPow.comp Primrec.snd))
      (Primrec.const 2))
    (Primrec.const 1)).of_eq fun _p =>
      Nat.testBit_eq_decide_div_mod_eq.symm

theorem not_testBit_of_ge {n k : ℕ} (h : n ≤ k) : n.testBit k = false := by
  cases ht : n.testBit k with
  | false => rfl
  | true => exact (Nat.not_le_of_gt (e.mem_lt (e.mem.mpr ht)) h).elim

theorem primrecRel_testBit_true : PrimrecRel fun (n k : ℕ) => n.testBit k = true :=
  Primrec.eq.comp primrec_testBit (Primrec.const true)

namespace e

private abbrev Enc := _root_.DomainTheory.DataTypesAsLattices.e

private theorem mem_iff {n k : ℕ} : k ∈ Enc n ↔ n.testBit k := by
  rw [Enc, mem]

private def subsetBoolAux (n m fuel : ℕ) : Bool :=
  fuel.rec true fun k ih => ih && (!(n.testBit k) || m.testBit k)

def subsetBool (n m : ℕ) : Bool := subsetBoolAux n m n

private theorem subsetBoolAux_succ (n m fuel : ℕ) :
    subsetBoolAux n m (fuel + 1) =
      (subsetBoolAux n m fuel && (!(n.testBit fuel) || m.testBit fuel)) :=
  rfl

private theorem subsetBoolAux_iff (n m fuel : ℕ) :
    subsetBoolAux n m fuel = true ↔
      ∀ k < fuel, n.testBit k = true → m.testBit k = true := by
  induction fuel with
```

```
  | zero => simp [subsetBoolAux]
  | succ fuel ih =>
    rw [subsetBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ k hk
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hk) with hlt | rfl
      · exact h k hlt
      · intro hk'
        simp [hk'] at hb
        exact hb
    · intro h
      refine ⟨fun k hk => h k (Nat.lt_succ_of_lt hk), ?_⟩
      by_cases hk : n.testBit fuel = true
      · simp [h fuel (Nat.lt_succ_self fuel) hk]
      · simp [hk]

theorem subsetBool_iff (n m : ℕ) :
    subsetBool n m = true ↔ ∀ k, n.testBit k = true → m.testBit k = true := by
  rw [subsetBool, subsetBoolAux_iff]
  constructor
  · intro h k hk
    by_cases hkn : k < n
    · exact h k hkn hk
    · exact absurd hk (by simp [not_testBit_of_ge (Nat.le_of_not_gt hkn)])
  · intro h k _ hk
    exact h k hk

private def eqUnionBoolAux (n m k fuel : ℕ) : Bool :=
  fuel.rec true fun i ih => ih && (n.testBit i == (m.testBit i || k.testBit i))

def eqUnionBool (n m k : ℕ) : Bool := eqUnionBoolAux n m k (n + m + k + 1)

private theorem eqUnionBoolAux_succ (n m k fuel : ℕ) :
    eqUnionBoolAux n m k (fuel + 1) =
      (eqUnionBoolAux n m k fuel && (n.testBit fuel == (m.testBit fuel || k.testBit
    fuel))) :=
  rfl

private theorem eqUnionBoolAux_iff (n m k fuel : ℕ) :
    eqUnionBoolAux n m k fuel = true ↔
      ∀ i < fuel, n.testBit i = (m.testBit i || k.testBit i) := by
  induction fuel with
  | zero => simp [eqUnionBoolAux]
  | succ fuel ih =>
    rw [eqUnionBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ i hi
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hi) with hlt | rfl
      · exact h i hlt
      · simpa [beq_iff_eq] using hb
    · intro h
      refine ⟨fun i hi => h i (Nat.lt_succ_of_lt hi), ?_⟩
      simpa [beq_iff_eq] using h fuel (Nat.lt_succ_self fuel)
```

```
theorem eqUnionBool_iff (n m k : ℕ) :
    eqUnionBool n m k = true ↔ Enc n = Enc m ∪ Enc k := by
  rw [eqUnionBool, eqUnionBoolAux_iff]
  constructor
  · intro h
    ext i
    rw [mem_iff, Set.mem_union, mem_iff (n := m), mem_iff (n := k)]
    by_cases hi : i < n + m + k + 1
    · rw [h i hi]
      simp
    · have hle : n + m + k + 1 ≤ i := Nat.le_of_not_gt (by simpa [gt_iff_lt] using hi)
      have hn_le : n ≤ n + m + k + 1 := by simp [Nat.add_assoc]
      have hm_le : m ≤ n + m + k + 1 :=
        Nat.le_trans (Nat.le_add_left m n) (Nat.le_add_right (n + m) (k + 1))
      have hk_le : k ≤ n + m + k + 1 := by
        calc
          k ≤ n + m + 1 + k := Nat.le_add_left k (n + m + 1)
          _ = n + m + k + 1 := by
            rw [Nat.add_assoc (n + m) 1 k, Nat.add_comm 1 k, ← Nat.add_assoc (n + m) k
     1]
      have hn := not_testBit_of_ge (Nat.le_trans hn_le hle)
      have hm := not_testBit_of_ge (Nat.le_trans hm_le hle)
      have hk := not_testBit_of_ge (Nat.le_trans hk_le hle)
      simp [hn, hm, hk]
  · intro h i _
    have hmem : n.testBit i = true ↔ m.testBit i = true ∨ k.testBit i = true := by
      rw [← mem_iff, h, Set.mem_union, ← mem_iff (n := m), ← mem_iff (n := k)]
    cases hn : n.testBit i <;> cases hm : m.testBit i <;> cases hk : k.testBit i <;>
      simp [hn, hm, hk] at hmem ⊢

end e

theorem eSubsetBool_iff (n m : ℕ) :
    e.subsetBool n m = true ↔ e n ⊆ e m := by
  simp [Set.subset_def, e.mem, e.subsetBool_iff]

theorem eEqUnionBool_iff (n m k : ℕ) :
    e.eqUnionBool n m k = true ↔ e n = e m ∪ e k :=
  e.eqUnionBool_iff n m k

theorem primrec_e_subsetBool : Primrec₂ e.subsetBool := by
  have hstep : Primrec₂ fun (p : ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (!(p.1.testBit nih.1) || p.2.testBit nih.1) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.or.comp
        (Primrec.not.comp
          (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp
    Primrec.snd)))
        (primrec_testBit.comp (Primrec.snd.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd)))
  exact (Primrec.nat_rec' Primrec.fst (Primrec.const true) hstep).of_eq fun _ => rfl

theorem primrec_e_eqUnionBool : Primrec fun t : ℕ × ℕ × ℕ =>
    e.eqUnionBool t.1 t.2.1 t.2.2 := by
  have hbound : Primrec fun t : ℕ × ℕ × ℕ => t.1 + t.2.1 + t.2.2 + 1 :=
    Primrec.succ.comp
```

```
      (Primrec.nat_add.comp
        (Primrec.nat_add.comp Primrec.fst (Primrec.fst.comp Primrec.snd))
        (Primrec.snd.comp Primrec.snd))
  have hstep : Primrec₂ fun (p : ℕ × ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (p.1.testBit nih.1 == (p.2.1.testBit nih.1 || p.2.2.testBit nih.1)) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.beq.comp
        (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd))
        (Primrec.or.comp
          (primrec_testBit.comp
            (Primrec.fst.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))
          (primrec_testBit.comp
            (Primrec.snd.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))))
  exact (Primrec.nat_rec' hbound (Primrec.const true) hstep).of_eq fun _ => rfl

end DomainTheory.DataTypesAsLattices
```

3

eScan.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Computability.Primrec.Basic

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

theorem primrec_twoPow : Primrec fun k : ℕ => 2 ^ k :=
  (Primrec.nat_rec' (f := id) (g := fun _ => (1 : ℕ))
    (h := fun (_ : ℕ) (p : ℕ × ℕ) => p.2 * 2)
    Primrec.id (Primrec.const 1)
    (show Primrec fun q : ℕ × ℕ × ℕ => q.2.2 * 2 from
      Primrec.nat_mul.comp (Primrec.snd.comp Primrec.snd) (Primrec.const 2))).of_eq
    fun k => by
      induction k with
      | zero => simp
      | succ k ih =>
        change (Nat.rec 1 (fun n IH => (n, IH).2 * 2) k) * 2 = 2 ^ (k + 1)
        have ih' : Nat.rec 1 (fun n IH => (n, IH).2 * 2) k = 2 ^ k := by
          simpa [id] using ih
        rw [ih', Nat.pow_succ, Nat.mul_comm]

theorem primrec_testBit : Primrec₂ fun n k : ℕ => n.testBit k :=
  (Primrec.eq.decide.comp
    (Primrec.nat_mod.comp
      (Primrec.nat_div.comp Primrec.fst (primrec_twoPow.comp Primrec.snd))
      (Primrec.const 2))
    (Primrec.const 1)).of_eq fun _p =>
```

```
      Nat.testBit_eq_decide_div_mod_eq.symm

theorem not_testBit_of_ge {n k : ℕ} (h : n ≤ k) : n.testBit k = false := by
  cases ht : n.testBit k with
  | false => rfl
  | true => exact (Nat.not_le_of_gt (e.mem_lt (e.mem.mpr ht)) h).elim

theorem primrecRel_testBit_true : PrimrecRel fun (n k : ℕ) => n.testBit k = true :=
  Primrec.eq.comp primrec_testBit (Primrec.const true)

namespace e

private abbrev Enc := _root_.DomainTheory.DataTypesAsLattices.e

private theorem mem_iff {n k : ℕ} : k ∈ Enc n ↔ n.testBit k := by
  rw [Enc, mem]

private def subsetBoolAux (n m fuel : ℕ) : Bool :=
  fuel.rec true fun k ih => ih && (!(n.testBit k) || m.testBit k)

def subsetBool (n m : ℕ) : Bool := subsetBoolAux n m n

private theorem subsetBoolAux_succ (n m fuel : ℕ) :
    subsetBoolAux n m (fuel + 1) =
      (subsetBoolAux n m fuel && (!(n.testBit fuel) || m.testBit fuel)) :=
  rfl

private theorem subsetBoolAux_iff (n m fuel : ℕ) :
    subsetBoolAux n m fuel = true ↔
      ∀ k < fuel, n.testBit k = true → m.testBit k = true := by
  induction fuel with
  | zero => simp [subsetBoolAux]
  | succ fuel ih =>
    rw [subsetBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ k hk
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hk) with hlt | rfl
      · exact h k hlt
      · intro hk'
        simp [hk'] at hb
        exact hb
    · intro h
      refine ⟨fun k hk => h k (Nat.lt_succ_of_lt hk), ?_⟩
      by_cases hk : n.testBit fuel = true
      · simp [h fuel (Nat.lt_succ_self fuel) hk]
      · simp [hk]

theorem subsetBool_iff (n m : ℕ) :
    subsetBool n m = true ↔ ∀ k, n.testBit k = true → m.testBit k = true := by
  rw [subsetBool, subsetBoolAux_iff]
  constructor
  · intro h k hk
    by_cases hkn : k < n
    · exact h k hkn hk
    · exact absurd hk (by simp [not_testBit_of_ge (Nat.le_of_not_gt hkn)])
```

```
  · intro h k _ hk
    exact h k hk

private def eqUnionBoolAux (n m k fuel : ℕ) : Bool :=
  fuel.rec true fun i ih => ih && (n.testBit i == (m.testBit i || k.testBit i))

def eqUnionBool (n m k : ℕ) : Bool := eqUnionBoolAux n m k (n + m + k + 1)

private theorem eqUnionBoolAux_succ (n m k fuel : ℕ) :
    eqUnionBoolAux n m k (fuel + 1) =
      (eqUnionBoolAux n m k fuel && (n.testBit fuel == (m.testBit fuel || k.testBit
    fuel))) :=
  rfl

private theorem eqUnionBoolAux_iff (n m k fuel : ℕ) :
    eqUnionBoolAux n m k fuel = true ↔
      ∀ i < fuel, n.testBit i = (m.testBit i || k.testBit i) := by
  induction fuel with
  | zero => simp [eqUnionBoolAux]
  | succ fuel ih =>
    rw [eqUnionBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ i hi
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hi) with hlt | rfl
      · exact h i hlt
      · simpa [beq_iff_eq] using hb
    · intro h
      refine ⟨fun i hi => h i (Nat.lt_succ_of_lt hi), ?_⟩
      simpa [beq_iff_eq] using h fuel (Nat.lt_succ_self fuel)

theorem eqUnionBool_iff (n m k : ℕ) :
    eqUnionBool n m k = true ↔ Enc n = Enc m ∪ Enc k := by
  rw [eqUnionBool, eqUnionBoolAux_iff]
  constructor
  · intro h
    ext i
    rw [mem_iff, Set.mem_union, mem_iff (n := m), mem_iff (n := k)]
    by_cases hi : i < n + m + k + 1
    · rw [h i hi]
      simp
    · have hle : n + m + k + 1 ≤ i := Nat.le_of_not_gt (by simpa [gt_iff_lt] using hi)
      have hn_le : n ≤ n + m + k + 1 := by simp [Nat.add_assoc]
      have hm_le : m ≤ n + m + k + 1 :=
        Nat.le_trans (Nat.le_add_left m n) (Nat.le_add_right (n + m) (k + 1))
      have hk_le : k ≤ n + m + k + 1 := by
        calc
          k ≤ n + m + 1 + k := Nat.le_add_left k (n + m + 1)
          _ = n + m + k + 1 := by
            rw [Nat.add_assoc (n + m) 1 k, Nat.add_comm 1 k, ← Nat.add_assoc (n + m) k
     1]
      have hn := not_testBit_of_ge (Nat.le_trans hn_le hle)
      have hm := not_testBit_of_ge (Nat.le_trans hm_le hle)
      have hk := not_testBit_of_ge (Nat.le_trans hk_le hle)
      simp [hn, hm, hk]
  · intro h i _
```

```
    have hmem : n.testBit i = true ↔ m.testBit i = true ∨ k.testBit i = true := by
      rw [← mem_iff, h, Set.mem_union, ← mem_iff (n := m), ← mem_iff (n := k)]
    cases hn : n.testBit i <;> cases hm : m.testBit i <;> cases hk : k.testBit i <;>
      simp [hn, hm, hk] at hmem ⊢

end e

theorem eSubsetBool_iff (n m : ℕ) :
    e.subsetBool n m = true ↔ e n ⊆ e m := by
  simp [Set.subset_def, e.mem, e.subsetBool_iff]

theorem eEqUnionBool_iff (n m k : ℕ) :
    e.eqUnionBool n m k = true ↔ e n = e m ∪ e k :=
  e.eqUnionBool_iff n m k

theorem primrec_e_subsetBool : Primrec₂ e.subsetBool := by
  have hstep : Primrec₂ fun (p : ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (!(p.1.testBit nih.1) || p.2.testBit nih.1) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.or.comp
        (Primrec.not.comp
          (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp
    Primrec.snd)))
        (primrec_testBit.comp (Primrec.snd.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd)))
  exact (Primrec.nat_rec' Primrec.fst (Primrec.const true) hstep).of_eq fun _ => rfl

theorem primrec_e_eqUnionBool : Primrec fun t : ℕ × ℕ × ℕ =>
    e.eqUnionBool t.1 t.2.1 t.2.2 := by
  have hbound : Primrec fun t : ℕ × ℕ × ℕ => t.1 + t.2.1 + t.2.2 + 1 :=
    Primrec.succ.comp
      (Primrec.nat_add.comp
        (Primrec.nat_add.comp Primrec.fst (Primrec.fst.comp Primrec.snd))
        (Primrec.snd.comp Primrec.snd))
  have hstep : Primrec₂ fun (p : ℕ × ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (p.1.testBit nih.1 == (p.2.1.testBit nih.1 || p.2.2.testBit nih.1)) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.beq.comp
        (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd))
        (Primrec.or.comp
          (primrec_testBit.comp
            (Primrec.fst.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))
          (primrec_testBit.comp
            (Primrec.snd.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))))
  exact (Primrec.nat_rec' hbound (Primrec.const true) hstep).of_eq fun _ => rfl

end DomainTheory.DataTypesAsLattices
```

4

eScan.lean

```
module
```

```
public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Computability.Primrec.Basic

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

theorem primrec_twoPow : Primrec fun k : ℕ => 2 ^ k :=
  (Primrec.nat_rec' (f := id) (g := fun _ => (1 : ℕ))
    (h := fun (_ : ℕ) (p : ℕ × ℕ) => p.2 * 2)
    Primrec.id (Primrec.const 1)
    (show Primrec fun q : ℕ × ℕ × ℕ => q.2.2 * 2 from
      Primrec.nat_mul.comp (Primrec.snd.comp Primrec.snd) (Primrec.const 2))).of_eq
    fun k => by
      induction k with
      | zero => simp
      | succ k ih =>
        change (Nat.rec 1 (fun n IH => (n, IH).2 * 2) k) * 2 = 2 ^ (k + 1)
        have ih' : Nat.rec 1 (fun n IH => (n, IH).2 * 2) k = 2 ^ k := by
          simpa [id] using ih
        rw [ih', Nat.pow_succ, Nat.mul_comm]

theorem primrec_testBit : Primrec₂ fun n k : ℕ => n.testBit k :=
  (Primrec.eq.decide.comp
    (Primrec.nat_mod.comp
      (Primrec.nat_div.comp Primrec.fst (primrec_twoPow.comp Primrec.snd))
      (Primrec.const 2))
    (Primrec.const 1)).of_eq fun _p =>
      Nat.testBit_eq_decide_div_mod_eq.symm

theorem not_testBit_of_ge {n k : ℕ} (h : n ≤ k) : n.testBit k = false := by
  cases ht : n.testBit k with
  | false => rfl
  | true => exact (Nat.not_le_of_gt (e.mem_lt (e.mem.mpr ht)) h).elim

theorem primrecRel_testBit_true : PrimrecRel fun (n k : ℕ) => n.testBit k = true :=
  Primrec.eq.comp primrec_testBit (Primrec.const true)

namespace e

private abbrev Enc := _root_.DomainTheory.DataTypesAsLattices.e

private theorem mem_iff {n k : ℕ} : k ∈ Enc n ↔ n.testBit k := by
  rw [Enc, mem]

private def subsetBoolAux (n m fuel : ℕ) : Bool :=
  fuel.rec true fun k ih => ih && (!(n.testBit k) || m.testBit k)

def subsetBool (n m : ℕ) : Bool := subsetBoolAux n m n

private theorem subsetBoolAux_succ (n m fuel : ℕ) :
    subsetBoolAux n m (fuel + 1) =
      (subsetBoolAux n m fuel && (!(n.testBit fuel) || m.testBit fuel)) :=
```

```
  rfl

private theorem subsetBoolAux_iff (n m fuel : ℕ) :
    subsetBoolAux n m fuel = true ↔
      ∀ k < fuel, n.testBit k = true → m.testBit k = true := by
  induction fuel with
  | zero => simp [subsetBoolAux]
  | succ fuel ih =>
    rw [subsetBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ k hk
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hk) with hlt | rfl
      · exact h k hlt
      · intro hk'
        simp [hk'] at hb
        exact hb
    · intro h
      refine ⟨fun k hk => h k (Nat.lt_succ_of_lt hk), ?_⟩
      by_cases hk : n.testBit fuel = true
      · simp [h fuel (Nat.lt_succ_self fuel) hk]
      · simp [hk]

theorem subsetBool_iff (n m : ℕ) :
    subsetBool n m = true ↔ ∀ k, n.testBit k = true → m.testBit k = true := by
  rw [subsetBool, subsetBoolAux_iff]
  constructor
  · intro h k hk
    by_cases hkn : k < n
    · exact h k hkn hk
    · exact absurd hk (by simp [not_testBit_of_ge (Nat.le_of_not_gt hkn)])
  · intro h k _ hk
    exact h k hk

private def eqUnionBoolAux (n m k fuel : ℕ) : Bool :=
  fuel.rec true fun i ih => ih && (n.testBit i == (m.testBit i || k.testBit i))

def eqUnionBool (n m k : ℕ) : Bool := eqUnionBoolAux n m k (n + m + k + 1)

private theorem eqUnionBoolAux_succ (n m k fuel : ℕ) :
    eqUnionBoolAux n m k (fuel + 1) =
      (eqUnionBoolAux n m k fuel && (n.testBit fuel == (m.testBit fuel || k.testBit
    fuel))) :=
  rfl

private theorem eqUnionBoolAux_iff (n m k fuel : ℕ) :
    eqUnionBoolAux n m k fuel = true ↔
      ∀ i < fuel, n.testBit i = (m.testBit i || k.testBit i) := by
  induction fuel with
  | zero => simp [eqUnionBoolAux]
  | succ fuel ih =>
    rw [eqUnionBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ i hi
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hi) with hlt | rfl
```

```
      · exact h i hlt
      · simpa [beq_iff_eq] using hb
    · intro h
      refine ⟨fun i hi => h i (Nat.lt_succ_of_lt hi), ?_⟩
      simpa [beq_iff_eq] using h fuel (Nat.lt_succ_self fuel)

theorem eqUnionBool_iff (n m k : ℕ) :
    eqUnionBool n m k = true ↔ Enc n = Enc m ∪ Enc k := by
  rw [eqUnionBool, eqUnionBoolAux_iff]
  constructor
  · intro h
    ext i
    rw [mem_iff, Set.mem_union, mem_iff (n := m), mem_iff (n := k)]
    by_cases hi : i < n + m + k + 1
    · rw [h i hi]
      simp
    · have hle : n + m + k + 1 ≤ i := Nat.le_of_not_gt (by simpa [gt_iff_lt] using hi)
      have hn_le : n ≤ n + m + k + 1 := by simp [Nat.add_assoc]
      have hm_le : m ≤ n + m + k + 1 :=
        Nat.le_trans (Nat.le_add_left m n) (Nat.le_add_right (n + m) (k + 1))
      have hk_le : k ≤ n + m + k + 1 := by
        calc
          k ≤ n + m + 1 + k := Nat.le_add_left k (n + m + 1)
          _ = n + m + k + 1 := by
            rw [Nat.add_assoc (n + m) 1 k, Nat.add_comm 1 k, ← Nat.add_assoc (n + m) k
     1]
      have hn := not_testBit_of_ge (Nat.le_trans hn_le hle)
      have hm := not_testBit_of_ge (Nat.le_trans hm_le hle)
      have hk := not_testBit_of_ge (Nat.le_trans hk_le hle)
      simp [hn, hm, hk]
  · intro h i _
    have hmem : n.testBit i = true ↔ m.testBit i = true ∨ k.testBit i = true := by
      rw [← mem_iff, h, Set.mem_union, ← mem_iff (n := m), ← mem_iff (n := k)]
    cases hn : n.testBit i <;> cases hm : m.testBit i <;> cases hk : k.testBit i <;>
      simp [hn, hm, hk] at hmem ⊢

end e

theorem eSubsetBool_iff (n m : ℕ) :
    e.subsetBool n m = true ↔ e n ⊆ e m := by
  simp [Set.subset_def, e.mem, e.subsetBool_iff]

theorem eEqUnionBool_iff (n m k : ℕ) :
    e.eqUnionBool n m k = true ↔ e n = e m ∪ e k :=
  e.eqUnionBool_iff n m k

theorem primrec_e_subsetBool : Primrec₂ e.subsetBool := by
  have hstep : Primrec₂ fun (p : ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (!(p.1.testBit nih.1) || p.2.testBit nih.1) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.or.comp
        (Primrec.not.comp
          (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp
    Primrec.snd)))
        (primrec_testBit.comp (Primrec.snd.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd)))
```

```
  exact (Primrec.nat_rec' Primrec.fst (Primrec.const true) hstep).of_eq fun _ => rfl

theorem primrec_e_eqUnionBool : Primrec fun t : ℕ × ℕ × ℕ =>
    e.eqUnionBool t.1 t.2.1 t.2.2 := by
  have hbound : Primrec fun t : ℕ × ℕ × ℕ => t.1 + t.2.1 + t.2.2 + 1 :=
    Primrec.succ.comp
      (Primrec.nat_add.comp
        (Primrec.nat_add.comp Primrec.fst (Primrec.fst.comp Primrec.snd))
        (Primrec.snd.comp Primrec.snd))
  have hstep : Primrec₂ fun (p : ℕ × ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (p.1.testBit nih.1 == (p.2.1.testBit nih.1 || p.2.2.testBit nih.1)) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.beq.comp
        (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd))
        (Primrec.or.comp
          (primrec_testBit.comp
            (Primrec.fst.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))
          (primrec_testBit.comp
            (Primrec.snd.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))))
  exact (Primrec.nat_rec' hbound (Primrec.const true) hstep).of_eq fun _ => rfl

end DomainTheory.DataTypesAsLattices
```

5

eScan.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Computability.Primrec.Basic

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

theorem primrec_twoPow : Primrec fun k : ℕ => 2 ^ k :=
  (Primrec.nat_rec' (f := id) (g := fun _ => (1 : ℕ))
    (h := fun (_ : ℕ) (p : ℕ × ℕ) => p.2 * 2)
    Primrec.id (Primrec.const 1)
    (show Primrec fun q : ℕ × ℕ × ℕ => q.2.2 * 2 from
      Primrec.nat_mul.comp (Primrec.snd.comp Primrec.snd) (Primrec.const 2))).of_eq
    fun k => by
      induction k with
      | zero => simp
      | succ k ih =>
        change (Nat.rec 1 (fun n IH => (n, IH).2 * 2) k) * 2 = 2 ^ (k + 1)
        have ih' : Nat.rec 1 (fun n IH => (n, IH).2 * 2) k = 2 ^ k := by
          simpa [id] using ih
        rw [ih', Nat.pow_succ, Nat.mul_comm]
```

```
theorem primrec_testBit : Primrec₂ fun n k : ℕ => n.testBit k :=
  (Primrec.eq.decide.comp
    (Primrec.nat_mod.comp
      (Primrec.nat_div.comp Primrec.fst (primrec_twoPow.comp Primrec.snd))
      (Primrec.const 2))
    (Primrec.const 1)).of_eq fun _p =>
      Nat.testBit_eq_decide_div_mod_eq.symm

theorem not_testBit_of_ge {n k : ℕ} (h : n ≤ k) : n.testBit k = false := by
  cases ht : n.testBit k with
  | false => rfl
  | true => exact (Nat.not_le_of_gt (e.mem_lt (e.mem.mpr ht)) h).elim

theorem primrecRel_testBit_true : PrimrecRel fun (n k : ℕ) => n.testBit k = true :=
  Primrec.eq.comp primrec_testBit (Primrec.const true)

namespace e

private abbrev Enc := _root_.DomainTheory.DataTypesAsLattices.e

private theorem mem_iff {n k : ℕ} : k ∈ Enc n ↔ n.testBit k := by
  rw [Enc, mem]

private def subsetBoolAux (n m fuel : ℕ) : Bool :=
  fuel.rec true fun k ih => ih && (!(n.testBit k) || m.testBit k)

def subsetBool (n m : ℕ) : Bool := subsetBoolAux n m n

private theorem subsetBoolAux_succ (n m fuel : ℕ) :
    subsetBoolAux n m (fuel + 1) =
      (subsetBoolAux n m fuel && (!(n.testBit fuel) || m.testBit fuel)) :=
  rfl

private theorem subsetBoolAux_iff (n m fuel : ℕ) :
    subsetBoolAux n m fuel = true ↔
      ∀ k < fuel, n.testBit k = true → m.testBit k = true := by
  induction fuel with
  | zero => simp [subsetBoolAux]
  | succ fuel ih =>
    rw [subsetBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ k hk
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hk) with hlt | rfl
      · exact h k hlt
      · intro hk'
        simp [hk'] at hb
        exact hb
    · intro h
      refine ⟨fun k hk => h k (Nat.lt_succ_of_lt hk), ?_⟩
      by_cases hk : n.testBit fuel = true
      · simp [h fuel (Nat.lt_succ_self fuel) hk]
      · simp [hk]

theorem subsetBool_iff (n m : ℕ) :
    subsetBool n m = true ↔ ∀ k, n.testBit k = true → m.testBit k = true := by
```

```
  rw [subsetBool, subsetBoolAux_iff]
  constructor
  · intro h k hk
    by_cases hkn : k < n
    · exact h k hkn hk
    · exact absurd hk (by simp [not_testBit_of_ge (Nat.le_of_not_gt hkn)])
  · intro h k _ hk
    exact h k hk

private def eqUnionBoolAux (n m k fuel : ℕ) : Bool :=
  fuel.rec true fun i ih => ih && (n.testBit i == (m.testBit i || k.testBit i))

def eqUnionBool (n m k : ℕ) : Bool := eqUnionBoolAux n m k (n + m + k + 1)

private theorem eqUnionBoolAux_succ (n m k fuel : ℕ) :
    eqUnionBoolAux n m k (fuel + 1) =
      (eqUnionBoolAux n m k fuel && (n.testBit fuel == (m.testBit fuel || k.testBit
    fuel))) :=
  rfl

private theorem eqUnionBoolAux_iff (n m k fuel : ℕ) :
    eqUnionBoolAux n m k fuel = true ↔
      ∀ i < fuel, n.testBit i = (m.testBit i || k.testBit i) := by
  induction fuel with
  | zero => simp [eqUnionBoolAux]
  | succ fuel ih =>
    rw [eqUnionBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ i hi
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hi) with hlt | rfl
      · exact h i hlt
      · simpa [beq_iff_eq] using hb
    · intro h
      refine ⟨fun i hi => h i (Nat.lt_succ_of_lt hi), ?_⟩
      simpa [beq_iff_eq] using h fuel (Nat.lt_succ_self fuel)

theorem eqUnionBool_iff (n m k : ℕ) :
    eqUnionBool n m k = true ↔ Enc n = Enc m ∪ Enc k := by
  rw [eqUnionBool, eqUnionBoolAux_iff]
  constructor
  · intro h
    ext i
    rw [mem_iff, Set.mem_union, mem_iff (n := m), mem_iff (n := k)]
    by_cases hi : i < n + m + k + 1
    · rw [h i hi]
      simp
    · have hle : n + m + k + 1 ≤ i := Nat.le_of_not_gt (by simpa [gt_iff_lt] using hi)
      have hn_le : n ≤ n + m + k + 1 := by simp [Nat.add_assoc]
      have hm_le : m ≤ n + m + k + 1 :=
        Nat.le_trans (Nat.le_add_left m n) (Nat.le_add_right (n + m) (k + 1))
      have hk_le : k ≤ n + m + k + 1 := by
        calc
          k ≤ n + m + 1 + k := Nat.le_add_left k (n + m + 1)
          _ = n + m + k + 1 := by
            rw [Nat.add_assoc (n + m) 1 k, Nat.add_comm 1 k, ← Nat.add_assoc (n + m) k
```

```
     1]
      have hn := not_testBit_of_ge (Nat.le_trans hn_le hle)
      have hm := not_testBit_of_ge (Nat.le_trans hm_le hle)
      have hk := not_testBit_of_ge (Nat.le_trans hk_le hle)
      simp [hn, hm, hk]
  · intro h i _
    have hmem : n.testBit i = true ↔ m.testBit i = true ∨ k.testBit i = true := by
      rw [← mem_iff, h, Set.mem_union, ← mem_iff (n := m), ← mem_iff (n := k)]
    cases hn : n.testBit i <;> cases hm : m.testBit i <;> cases hk : k.testBit i <;>
      simp [hn, hm, hk] at hmem ⊢

end e

theorem eSubsetBool_iff (n m : ℕ) :
    e.subsetBool n m = true ↔ e n ⊆ e m := by
  simp [Set.subset_def, e.mem, e.subsetBool_iff]

theorem eEqUnionBool_iff (n m k : ℕ) :
    e.eqUnionBool n m k = true ↔ e n = e m ∪ e k :=
  e.eqUnionBool_iff n m k

theorem primrec_e_subsetBool : Primrec₂ e.subsetBool := by
  have hstep : Primrec₂ fun (p : ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (!(p.1.testBit nih.1) || p.2.testBit nih.1) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.or.comp
        (Primrec.not.comp
          (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp
    Primrec.snd)))
        (primrec_testBit.comp (Primrec.snd.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd)))
  exact (Primrec.nat_rec' Primrec.fst (Primrec.const true) hstep).of_eq fun _ => rfl

theorem primrec_e_eqUnionBool : Primrec fun t : ℕ × ℕ × ℕ =>
    e.eqUnionBool t.1 t.2.1 t.2.2 := by
  have hbound : Primrec fun t : ℕ × ℕ × ℕ => t.1 + t.2.1 + t.2.2 + 1 :=
    Primrec.succ.comp
      (Primrec.nat_add.comp
        (Primrec.nat_add.comp Primrec.fst (Primrec.fst.comp Primrec.snd))
        (Primrec.snd.comp Primrec.snd))
  have hstep : Primrec₂ fun (p : ℕ × ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (p.1.testBit nih.1 == (p.2.1.testBit nih.1 || p.2.2.testBit nih.1)) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.beq.comp
        (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd))
        (Primrec.or.comp
          (primrec_testBit.comp
            (Primrec.fst.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))
          (primrec_testBit.comp
            (Primrec.snd.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))))
  exact (Primrec.nat_rec' hbound (Primrec.const true) hstep).of_eq fun _ => rfl

end DomainTheory.DataTypesAsLattices
```

eScan.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Computability.Primrec.Basic

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

theorem primrec_twoPow : Primrec fun k : ℕ => 2 ^ k :=
  (Primrec.nat_rec' (f := id) (g := fun _ => (1 : ℕ))
    (h := fun (_ : ℕ) (p : ℕ × ℕ) => p.2 * 2)
    Primrec.id (Primrec.const 1)
    (show Primrec fun q : ℕ × ℕ × ℕ => q.2.2 * 2 from
      Primrec.nat_mul.comp (Primrec.snd.comp Primrec.snd) (Primrec.const 2))).of_eq
    fun k => by
      induction k with
      | zero => simp
      | succ k ih =>
        change (Nat.rec 1 (fun n IH => (n, IH).2 * 2) k) * 2 = 2 ^ (k + 1)
        have ih' : Nat.rec 1 (fun n IH => (n, IH).2 * 2) k = 2 ^ k := by
          simpa [id] using ih
        rw [ih', Nat.pow_succ, Nat.mul_comm]

theorem primrec_testBit : Primrec₂ fun n k : ℕ => n.testBit k :=
  (Primrec.eq.decide.comp
    (Primrec.nat_mod.comp
      (Primrec.nat_div.comp Primrec.fst (primrec_twoPow.comp Primrec.snd))
      (Primrec.const 2))
    (Primrec.const 1)).of_eq fun _p =>
      Nat.testBit_eq_decide_div_mod_eq.symm

theorem not_testBit_of_ge {n k : ℕ} (h : n ≤ k) : n.testBit k = false := by
  cases ht : n.testBit k with
  | false => rfl
  | true => exact (Nat.not_le_of_gt (e.mem_lt (e.mem.mpr ht)) h).elim

theorem primrecRel_testBit_true : PrimrecRel fun (n k : ℕ) => n.testBit k = true :=
  Primrec.eq.comp primrec_testBit (Primrec.const true)

namespace e

private abbrev Enc := _root_.DomainTheory.DataTypesAsLattices.e

private theorem mem_iff {n k : ℕ} : k ∈ Enc n ↔ n.testBit k := by
  rw [Enc, mem]

private def subsetBoolAux (n m fuel : ℕ) : Bool :=
  fuel.rec true fun k ih => ih && (!(n.testBit k) || m.testBit k)
```

```
def subsetBool (n m : ℕ) : Bool := subsetBoolAux n m n

private theorem subsetBoolAux_succ (n m fuel : ℕ) :
    subsetBoolAux n m (fuel + 1) =
      (subsetBoolAux n m fuel && (!(n.testBit fuel) || m.testBit fuel)) :=
  rfl

private theorem subsetBoolAux_iff (n m fuel : ℕ) :
    subsetBoolAux n m fuel = true ↔
      ∀ k < fuel, n.testBit k = true → m.testBit k = true := by
  induction fuel with
  | zero => simp [subsetBoolAux]
  | succ fuel ih =>
    rw [subsetBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ k hk
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hk) with hlt | rfl
      · exact h k hlt
      · intro hk'
        simp [hk'] at hb
        exact hb
    · intro h
      refine ⟨fun k hk => h k (Nat.lt_succ_of_lt hk), ?_⟩
      by_cases hk : n.testBit fuel = true
      · simp [h fuel (Nat.lt_succ_self fuel) hk]
      · simp [hk]

theorem subsetBool_iff (n m : ℕ) :
    subsetBool n m = true ↔ ∀ k, n.testBit k = true → m.testBit k = true := by
  rw [subsetBool, subsetBoolAux_iff]
  constructor
  · intro h k hk
    by_cases hkn : k < n
    · exact h k hkn hk
    · exact absurd hk (by simp [not_testBit_of_ge (Nat.le_of_not_gt hkn)])
  · intro h k _ hk
    exact h k hk

private def eqUnionBoolAux (n m k fuel : ℕ) : Bool :=
  fuel.rec true fun i ih => ih && (n.testBit i == (m.testBit i || k.testBit i))

def eqUnionBool (n m k : ℕ) : Bool := eqUnionBoolAux n m k (n + m + k + 1)

private theorem eqUnionBoolAux_succ (n m k fuel : ℕ) :
    eqUnionBoolAux n m k (fuel + 1) =
      (eqUnionBoolAux n m k fuel && (n.testBit fuel == (m.testBit fuel || k.testBit
    fuel))) :=
  rfl

private theorem eqUnionBoolAux_iff (n m k fuel : ℕ) :
    eqUnionBoolAux n m k fuel = true ↔
      ∀ i < fuel, n.testBit i = (m.testBit i || k.testBit i) := by
  induction fuel with
  | zero => simp [eqUnionBoolAux]
  | succ fuel ih =>
```

```
    rw [eqUnionBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ i hi
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hi) with hlt | rfl
      · exact h i hlt
      · simpa [beq_iff_eq] using hb
    · intro h
      refine ⟨fun i hi => h i (Nat.lt_succ_of_lt hi), ?_⟩
      simpa [beq_iff_eq] using h fuel (Nat.lt_succ_self fuel)

theorem eqUnionBool_iff (n m k : ℕ) :
    eqUnionBool n m k = true ↔ Enc n = Enc m ∪ Enc k := by
  rw [eqUnionBool, eqUnionBoolAux_iff]
  constructor
  · intro h
    ext i
    rw [mem_iff, Set.mem_union, mem_iff (n := m), mem_iff (n := k)]
    by_cases hi : i < n + m + k + 1
    · rw [h i hi]
      simp
    · have hle : n + m + k + 1 ≤ i := Nat.le_of_not_gt (by simpa [gt_iff_lt] using hi)
      have hn_le : n ≤ n + m + k + 1 := by simp [Nat.add_assoc]
      have hm_le : m ≤ n + m + k + 1 :=
        Nat.le_trans (Nat.le_add_left m n) (Nat.le_add_right (n + m) (k + 1))
      have hk_le : k ≤ n + m + k + 1 := by
        calc
          k ≤ n + m + 1 + k := Nat.le_add_left k (n + m + 1)
          _ = n + m + k + 1 := by
            rw [Nat.add_assoc (n + m) 1 k, Nat.add_comm 1 k, ← Nat.add_assoc (n + m) k
     1]
      have hn := not_testBit_of_ge (Nat.le_trans hn_le hle)
      have hm := not_testBit_of_ge (Nat.le_trans hm_le hle)
      have hk := not_testBit_of_ge (Nat.le_trans hk_le hle)
      simp [hn, hm, hk]
  · intro h i _
    have hmem : n.testBit i = true ↔ m.testBit i = true ∨ k.testBit i = true := by
      rw [← mem_iff, h, Set.mem_union, ← mem_iff (n := m), ← mem_iff (n := k)]
    cases hn : n.testBit i <;> cases hm : m.testBit i <;> cases hk : k.testBit i <;>
      simp [hn, hm, hk] at hmem ⊢

end e

theorem eSubsetBool_iff (n m : ℕ) :
    e.subsetBool n m = true ↔ e n ⊆ e m := by
  simp [Set.subset_def, e.mem, e.subsetBool_iff]

theorem eEqUnionBool_iff (n m k : ℕ) :
    e.eqUnionBool n m k = true ↔ e n = e m ∪ e k :=
  e.eqUnionBool_iff n m k

theorem primrec_e_subsetBool : Primrec₂ e.subsetBool := by
  have hstep : Primrec₂ fun (p : ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (!(p.1.testBit nih.1) || p.2.testBit nih.1) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.or.comp
```

```
        (Primrec.not.comp
          (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp
    Primrec.snd)))
        (primrec_testBit.comp (Primrec.snd.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd)))
  exact (Primrec.nat_rec' Primrec.fst (Primrec.const true) hstep).of_eq fun _ => rfl

theorem primrec_e_eqUnionBool : Primrec fun t : ℕ × ℕ × ℕ =>
    e.eqUnionBool t.1 t.2.1 t.2.2 := by
  have hbound : Primrec fun t : ℕ × ℕ × ℕ => t.1 + t.2.1 + t.2.2 + 1 :=
    Primrec.succ.comp
      (Primrec.nat_add.comp
        (Primrec.nat_add.comp Primrec.fst (Primrec.fst.comp Primrec.snd))
        (Primrec.snd.comp Primrec.snd))
  have hstep : Primrec₂ fun (p : ℕ × ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (p.1.testBit nih.1 == (p.2.1.testBit nih.1 || p.2.2.testBit nih.1)) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.beq.comp
        (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd))
        (Primrec.or.comp
          (primrec_testBit.comp
            (Primrec.fst.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))
          (primrec_testBit.comp
            (Primrec.snd.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))))
  exact (Primrec.nat_rec' hbound (Primrec.const true) hstep).of_eq fun _ => rfl

end DomainTheory.DataTypesAsLattices
```

7

eScan.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Computability.Primrec.Basic

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

theorem primrec_twoPow : Primrec fun k : ℕ => 2 ^ k :=
  (Primrec.nat_rec' (f := id) (g := fun _ => (1 : ℕ))
    (h := fun (_ : ℕ) (p : ℕ × ℕ) => p.2 * 2)
    Primrec.id (Primrec.const 1)
    (show Primrec fun q : ℕ × ℕ × ℕ => q.2.2 * 2 from
      Primrec.nat_mul.comp (Primrec.snd.comp Primrec.snd) (Primrec.const 2))).of_eq
    fun k => by
      induction k with
      | zero => simp
      | succ k ih =>
```

```
        change (Nat.rec 1 (fun n IH => (n, IH).2 * 2) k) * 2 = 2 ^ (k + 1)
        have ih' : Nat.rec 1 (fun n IH => (n, IH).2 * 2) k = 2 ^ k := by
          simpa [id] using ih
        rw [ih', Nat.pow_succ, Nat.mul_comm]

theorem primrec_testBit : Primrec₂ fun n k : ℕ => n.testBit k :=
  (Primrec.eq.decide.comp
    (Primrec.nat_mod.comp
      (Primrec.nat_div.comp Primrec.fst (primrec_twoPow.comp Primrec.snd))
      (Primrec.const 2))
    (Primrec.const 1)).of_eq fun _p =>
      Nat.testBit_eq_decide_div_mod_eq.symm

theorem not_testBit_of_ge {n k : ℕ} (h : n ≤ k) : n.testBit k = false := by
  cases ht : n.testBit k with
  | false => rfl
  | true => exact (Nat.not_le_of_gt (e.mem_lt (e.mem.mpr ht)) h).elim

theorem primrecRel_testBit_true : PrimrecRel fun (n k : ℕ) => n.testBit k = true :=
  Primrec.eq.comp primrec_testBit (Primrec.const true)

namespace e

private abbrev Enc := _root_.DomainTheory.DataTypesAsLattices.e

private theorem mem_iff {n k : ℕ} : k ∈ Enc n ↔ n.testBit k := by
  rw [Enc, mem]

private def subsetBoolAux (n m fuel : ℕ) : Bool :=
  fuel.rec true fun k ih => ih && (!(n.testBit k) || m.testBit k)

def subsetBool (n m : ℕ) : Bool := subsetBoolAux n m n

private theorem subsetBoolAux_succ (n m fuel : ℕ) :
    subsetBoolAux n m (fuel + 1) =
      (subsetBoolAux n m fuel && (!(n.testBit fuel) || m.testBit fuel)) :=
  rfl

private theorem subsetBoolAux_iff (n m fuel : ℕ) :
    subsetBoolAux n m fuel = true ↔
      ∀ k < fuel, n.testBit k = true → m.testBit k = true := by
  induction fuel with
  | zero => simp [subsetBoolAux]
  | succ fuel ih =>
    rw [subsetBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ k hk
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hk) with hlt | rfl
      · exact h k hlt
      · intro hk'
        simp [hk'] at hb
        exact hb
    · intro h
      refine ⟨fun k hk => h k (Nat.lt_succ_of_lt hk), ?_⟩
      by_cases hk : n.testBit fuel = true
```

```
      · simp [h fuel (Nat.lt_succ_self fuel) hk]
      · simp [hk]

theorem subsetBool_iff (n m : ℕ) :
    subsetBool n m = true ↔ ∀ k, n.testBit k = true → m.testBit k = true := by
  rw [subsetBool, subsetBoolAux_iff]
  constructor
  · intro h k hk
    by_cases hkn : k < n
    · exact h k hkn hk
    · exact absurd hk (by simp [not_testBit_of_ge (Nat.le_of_not_gt hkn)])
  · intro h k _ hk
    exact h k hk

private def eqUnionBoolAux (n m k fuel : ℕ) : Bool :=
  fuel.rec true fun i ih => ih && (n.testBit i == (m.testBit i || k.testBit i))

def eqUnionBool (n m k : ℕ) : Bool := eqUnionBoolAux n m k (n + m + k + 1)

private theorem eqUnionBoolAux_succ (n m k fuel : ℕ) :
    eqUnionBoolAux n m k (fuel + 1) =
      (eqUnionBoolAux n m k fuel && (n.testBit fuel == (m.testBit fuel || k.testBit
    fuel))) :=
  rfl

private theorem eqUnionBoolAux_iff (n m k fuel : ℕ) :
    eqUnionBoolAux n m k fuel = true ↔
      ∀ i < fuel, n.testBit i = (m.testBit i || k.testBit i) := by
  induction fuel with
  | zero => simp [eqUnionBoolAux]
  | succ fuel ih =>
    rw [eqUnionBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ i hi
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hi) with hlt | rfl
      · exact h i hlt
      · simpa [beq_iff_eq] using hb
    · intro h
      refine ⟨fun i hi => h i (Nat.lt_succ_of_lt hi), ?_⟩
      simpa [beq_iff_eq] using h fuel (Nat.lt_succ_self fuel)

theorem eqUnionBool_iff (n m k : ℕ) :
    eqUnionBool n m k = true ↔ Enc n = Enc m ∪ Enc k := by
  rw [eqUnionBool, eqUnionBoolAux_iff]
  constructor
  · intro h
    ext i
    rw [mem_iff, Set.mem_union, mem_iff (n := m), mem_iff (n := k)]
    by_cases hi : i < n + m + k + 1
    · rw [h i hi]
      simp
    · have hle : n + m + k + 1 ≤ i := Nat.le_of_not_gt (by simpa [gt_iff_lt] using hi)
      have hn_le : n ≤ n + m + k + 1 := by simp [Nat.add_assoc]
      have hm_le : m ≤ n + m + k + 1 :=
        Nat.le_trans (Nat.le_add_left m n) (Nat.le_add_right (n + m) (k + 1))
```

```
      have hk_le : k ≤ n + m + k + 1 := by
        calc
          k ≤ n + m + 1 + k := Nat.le_add_left k (n + m + 1)
          _ = n + m + k + 1 := by
            rw [Nat.add_assoc (n + m) 1 k, Nat.add_comm 1 k, ← Nat.add_assoc (n + m) k
     1]
      have hn := not_testBit_of_ge (Nat.le_trans hn_le hle)
      have hm := not_testBit_of_ge (Nat.le_trans hm_le hle)
      have hk := not_testBit_of_ge (Nat.le_trans hk_le hle)
      simp [hn, hm, hk]
  · intro h i _
    have hmem : n.testBit i = true ↔ m.testBit i = true ∨ k.testBit i = true := by
      rw [← mem_iff, h, Set.mem_union, ← mem_iff (n := m), ← mem_iff (n := k)]
    cases hn : n.testBit i <;> cases hm : m.testBit i <;> cases hk : k.testBit i <;>
      simp [hn, hm, hk] at hmem ⊢

end e

theorem eSubsetBool_iff (n m : ℕ) :
    e.subsetBool n m = true ↔ e n ⊆ e m := by
  simp [Set.subset_def, e.mem, e.subsetBool_iff]

theorem eEqUnionBool_iff (n m k : ℕ) :
    e.eqUnionBool n m k = true ↔ e n = e m ∪ e k :=
  e.eqUnionBool_iff n m k

theorem primrec_e_subsetBool : Primrec₂ e.subsetBool := by
  have hstep : Primrec₂ fun (p : ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (!(p.1.testBit nih.1) || p.2.testBit nih.1) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.or.comp
        (Primrec.not.comp
          (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp
    Primrec.snd)))
        (primrec_testBit.comp (Primrec.snd.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd)))
  exact (Primrec.nat_rec' Primrec.fst (Primrec.const true) hstep).of_eq fun _ => rfl

theorem primrec_e_eqUnionBool : Primrec fun t : ℕ × ℕ × ℕ =>
    e.eqUnionBool t.1 t.2.1 t.2.2 := by
  have hbound : Primrec fun t : ℕ × ℕ × ℕ => t.1 + t.2.1 + t.2.2 + 1 :=
    Primrec.succ.comp
      (Primrec.nat_add.comp
        (Primrec.nat_add.comp Primrec.fst (Primrec.fst.comp Primrec.snd))
        (Primrec.snd.comp Primrec.snd))
  have hstep : Primrec₂ fun (p : ℕ × ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (p.1.testBit nih.1 == (p.2.1.testBit nih.1 || p.2.2.testBit nih.1)) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.beq.comp
        (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd))
        (Primrec.or.comp
          (primrec_testBit.comp
            (Primrec.fst.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))
          (primrec_testBit.comp
```

```
            (Primrec.snd.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))))
  exact (Primrec.nat_rec' hbound (Primrec.const true) hstep).of_eq fun _ => rfl

end DomainTheory.DataTypesAsLattices
```

8

eScan.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Computability.Primrec.Basic

@[expose] public section

set_option maxHeartbeats 2000000

namespace DomainTheory.DataTypesAsLattices

theorem primrec_twoPow : Primrec fun k : ℕ => 2 ^ k :=
  (Primrec.nat_rec' (f := id) (g := fun _ => (1 : ℕ))
    (h := fun (_ : ℕ) (p : ℕ × ℕ) => p.2 * 2)
    Primrec.id (Primrec.const 1)
    (show Primrec fun q : ℕ × ℕ × ℕ => q.2.2 * 2 from
      Primrec.nat_mul.comp (Primrec.snd.comp Primrec.snd) (Primrec.const 2))).of_eq
    fun k => by
      induction k with
      | zero => simp
      | succ k ih =>
        change (Nat.rec 1 (fun n IH => (n, IH).2 * 2) k) * 2 = 2 ^ (k + 1)
        have ih' : Nat.rec 1 (fun n IH => (n, IH).2 * 2) k = 2 ^ k := by
          simpa [id] using ih
        rw [ih', Nat.pow_succ, Nat.mul_comm]

theorem primrec_testBit : Primrec₂ fun n k : ℕ => n.testBit k :=
  (Primrec.eq.decide.comp
    (Primrec.nat_mod.comp
      (Primrec.nat_div.comp Primrec.fst (primrec_twoPow.comp Primrec.snd))
      (Primrec.const 2))
    (Primrec.const 1)).of_eq fun _p =>
      Nat.testBit_eq_decide_div_mod_eq.symm

theorem not_testBit_of_ge {n k : ℕ} (h : n ≤ k) : n.testBit k = false := by
  cases ht : n.testBit k with
  | false => rfl
  | true => exact (Nat.not_le_of_gt (e.mem_lt (e.mem.mpr ht)) h).elim

theorem primrecRel_testBit_true : PrimrecRel fun (n k : ℕ) => n.testBit k = true :=
  Primrec.eq.comp primrec_testBit (Primrec.const true)

namespace e

private abbrev Enc := _root_.DomainTheory.DataTypesAsLattices.e
```

```
private theorem mem_iff {n k : ℕ} : k ∈ Enc n ↔ n.testBit k := by
  rw [Enc, mem]

private def subsetBoolAux (n m fuel : ℕ) : Bool :=
  fuel.rec true fun k ih => ih && (!(n.testBit k) || m.testBit k)

def subsetBool (n m : ℕ) : Bool := subsetBoolAux n m n

private theorem subsetBoolAux_succ (n m fuel : ℕ) :
    subsetBoolAux n m (fuel + 1) =
      (subsetBoolAux n m fuel && (!(n.testBit fuel) || m.testBit fuel)) :=
  rfl

private theorem subsetBoolAux_iff (n m fuel : ℕ) :
    subsetBoolAux n m fuel = true ↔
      ∀ k < fuel, n.testBit k = true → m.testBit k = true := by
  induction fuel with
  | zero => simp [subsetBoolAux]
  | succ fuel ih =>
    rw [subsetBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ k hk
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hk) with hlt | rfl
      · exact h k hlt
      · intro hk'
        simp [hk'] at hb
        exact hb
    · intro h
      refine ⟨fun k hk => h k (Nat.lt_succ_of_lt hk), ?_⟩
      by_cases hk : n.testBit fuel = true
      · simp [h fuel (Nat.lt_succ_self fuel) hk]
      · simp [hk]

theorem subsetBool_iff (n m : ℕ) :
    subsetBool n m = true ↔ ∀ k, n.testBit k = true → m.testBit k = true := by
  rw [subsetBool, subsetBoolAux_iff]
  constructor
  · intro h k hk
    by_cases hkn : k < n
    · exact h k hkn hk
    · exact absurd hk (by simp [not_testBit_of_ge (Nat.le_of_not_gt hkn)])
  · intro h k _ hk
    exact h k hk

private def eqUnionBoolAux (n m k fuel : ℕ) : Bool :=
  fuel.rec true fun i ih => ih && (n.testBit i == (m.testBit i || k.testBit i))

def eqUnionBool (n m k : ℕ) : Bool := eqUnionBoolAux n m k (n + m + k + 1)

private theorem eqUnionBoolAux_succ (n m k fuel : ℕ) :
    eqUnionBoolAux n m k (fuel + 1) =
      (eqUnionBoolAux n m k fuel && (n.testBit fuel == (m.testBit fuel || k.testBit
    fuel))) :=
  rfl
```

```
private theorem eqUnionBoolAux_iff (n m k fuel : ℕ) :
    eqUnionBoolAux n m k fuel = true ↔
      ∀ i < fuel, n.testBit i = (m.testBit i || k.testBit i) := by
  induction fuel with
  | zero => simp [eqUnionBoolAux]
  | succ fuel ih =>
    rw [eqUnionBoolAux_succ]
    simp only [Bool.and_eq_true, ih]
    constructor
    · rintro ⟨h, hb⟩ i hi
      rcases Nat.lt_or_eq_of_le (Nat.le_of_lt_succ hi) with hlt | rfl
      · exact h i hlt
      · simpa [beq_iff_eq] using hb
    · intro h
      refine ⟨fun i hi => h i (Nat.lt_succ_of_lt hi), ?_⟩
      simpa [beq_iff_eq] using h fuel (Nat.lt_succ_self fuel)

theorem eqUnionBool_iff (n m k : ℕ) :
    eqUnionBool n m k = true ↔ Enc n = Enc m ∪ Enc k := by
  rw [eqUnionBool, eqUnionBoolAux_iff]
  constructor
  · intro h
    ext i
    rw [mem_iff, Set.mem_union, mem_iff (n := m), mem_iff (n := k)]
    by_cases hi : i < n + m + k + 1
    · rw [h i hi]
      simp
    · have hle : n + m + k + 1 ≤ i := Nat.le_of_not_gt (by simpa [gt_iff_lt] using hi)
      have hn_le : n ≤ n + m + k + 1 := by simp [Nat.add_assoc]
      have hm_le : m ≤ n + m + k + 1 :=
        Nat.le_trans (Nat.le_add_left m n) (Nat.le_add_right (n + m) (k + 1))
      have hk_le : k ≤ n + m + k + 1 := by
        calc
          k ≤ n + m + 1 + k := Nat.le_add_left k (n + m + 1)
          _ = n + m + k + 1 := by
            rw [Nat.add_assoc (n + m) 1 k, Nat.add_comm 1 k, ← Nat.add_assoc (n + m) k
     1]
      have hn := not_testBit_of_ge (Nat.le_trans hn_le hle)
      have hm := not_testBit_of_ge (Nat.le_trans hm_le hle)
      have hk := not_testBit_of_ge (Nat.le_trans hk_le hle)
      simp [hn, hm, hk]
  · intro h i _
    have hmem : n.testBit i = true ↔ m.testBit i = true ∨ k.testBit i = true := by
      rw [← mem_iff, h, Set.mem_union, ← mem_iff (n := m), ← mem_iff (n := k)]
    cases hn : n.testBit i <;> cases hm : m.testBit i <;> cases hk : k.testBit i <;>
      simp [hn, hm, hk] at hmem ⊢

end e

theorem eSubsetBool_iff (n m : ℕ) :
    e.subsetBool n m = true ↔ e n ⊆ e m := by
  simp [Set.subset_def, e.mem, e.subsetBool_iff]

theorem eEqUnionBool_iff (n m k : ℕ) :
    e.eqUnionBool n m k = true ↔ e n = e m ∪ e k :=
  e.eqUnionBool_iff n m k
```

```
theorem primrec_e_subsetBool : Primrec₂ e.subsetBool := by
  have hstep : Primrec₂ fun (p : ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (!(p.1.testBit nih.1) || p.2.testBit nih.1) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.or.comp
        (Primrec.not.comp
          (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp
    Primrec.snd)))
        (primrec_testBit.comp (Primrec.snd.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd)))
  exact (Primrec.nat_rec' Primrec.fst (Primrec.const true) hstep).of_eq fun _ => rfl

theorem primrec_e_eqUnionBool : Primrec fun t : ℕ × ℕ × ℕ =>
    e.eqUnionBool t.1 t.2.1 t.2.2 := by
  have hbound : Primrec fun t : ℕ × ℕ × ℕ => t.1 + t.2.1 + t.2.2 + 1 :=
    Primrec.succ.comp
      (Primrec.nat_add.comp
        (Primrec.nat_add.comp Primrec.fst (Primrec.fst.comp Primrec.snd))
        (Primrec.snd.comp Primrec.snd))
  have hstep : Primrec₂ fun (p : ℕ × ℕ × ℕ) (nih : ℕ × Bool) =>
      nih.2 && (p.1.testBit nih.1 == (p.2.1.testBit nih.1 || p.2.2.testBit nih.1)) :=
    Primrec.and.comp (Primrec.snd.comp Primrec.snd)
      (Primrec.beq.comp
        (primrec_testBit.comp (Primrec.fst.comp Primrec.fst) (Primrec.fst.comp Primrec
    .snd))
        (Primrec.or.comp
          (primrec_testBit.comp
            (Primrec.fst.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))
          (primrec_testBit.comp
            (Primrec.snd.comp (Primrec.snd.comp Primrec.fst))
            (Primrec.fst.comp Primrec.snd))))
  exact (Primrec.nat_rec' hbound (Primrec.const true) hstep).of_eq fun _ => rfl

end DomainTheory.DataTypesAsLattices
```

9

ePrimrec.lean

```
module

public import Mathlib.Computability.Primrec.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.e
import DomainTheory.DataTypesAsLattices.Pomega.eScan

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem primrecRel_mem_e : PrimrecRel fun n k => k ∈ e n :=
  primrecRel_testBit_true.of_eq fun n k => by simp [e.mem]

def eMax (n : ℕ) : ℕ := Nat.findGreatest (fun k => n.testBit k = true) n
```

```
theorem primrec_eMax : Primrec eMax := by
  exact (Primrec.nat_findGreatest Primrec.id primrecRel_testBit_true).of_eq fun _ =>
    rfl

theorem primrecRel_e_subset : PrimrecRel fun n m => e n ⊆ e m :=
  (Primrec.eq.comp primrec_e_subsetBool (Primrec.const true)).of_eq fun p =>
    eSubsetBool_iff p.1 p.2

theorem primrecPred_e_eq_union :
    PrimrecPred fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2 :=
  (Primrec.eq.comp primrec_e_eqUnionBool (Primrec.const true)).of_eq fun t =>
    eEqUnionBool_iff t.1 t.2.1 t.2.2

/-- Scott (1976), §1: membership, inclusion, union-equality for `e`, and `eMax`. -/
theorem scott_e_primrec_structure :
    PrimrecRel (fun n k => k ∈ e n) ∧
      Primrec eMax ∧
        PrimrecRel (fun n m => e n ⊆ e m) ∧
          PrimrecPred (fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2) :=
  ⟨primrecRel_mem_e, primrec_eMax, primrecRel_e_subset, primrecPred_e_eq_union⟩

end DomainTheory.DataTypesAsLattices
```

0

ePrimrec.lean

```
module

public import Mathlib.Computability.Primrec.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.e
import DomainTheory.DataTypesAsLattices.Pomega.eScan

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem primrecRel_mem_e : PrimrecRel fun n k => k ∈ e n :=
  primrecRel_testBit_true.of_eq fun n k => by simp [e.mem]

def eMax (n : ℕ) : ℕ := Nat.findGreatest (fun k => n.testBit k = true) n

theorem primrec_eMax : Primrec eMax := by
  exact (Primrec.nat_findGreatest Primrec.id primrecRel_testBit_true).of_eq fun _ =>
    rfl

theorem primrecRel_e_subset : PrimrecRel fun n m => e n ⊆ e m :=
  (Primrec.eq.comp primrec_e_subsetBool (Primrec.const true)).of_eq fun p =>
    eSubsetBool_iff p.1 p.2

theorem primrecPred_e_eq_union :
    PrimrecPred fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2 :=
  (Primrec.eq.comp primrec_e_eqUnionBool (Primrec.const true)).of_eq fun t =>
    eEqUnionBool_iff t.1 t.2.1 t.2.2

/-- Scott (1976), §1: membership, inclusion, union-equality for `e`, and `eMax`. -/
```

```
theorem scott_e_primrec_structure :
    PrimrecRel (fun n k => k ∈ e n) ∧
      Primrec eMax ∧
        PrimrecRel (fun n m => e n ⊆ e m) ∧
          PrimrecPred (fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2) :=
  ⟨primrecRel_mem_e, primrec_eMax, primrecRel_e_subset, primrecPred_e_eq_union⟩

end DomainTheory.DataTypesAsLattices
```

1

ePrimrec.lean

```
module

public import Mathlib.Computability.Primrec.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.e
import DomainTheory.DataTypesAsLattices.Pomega.eScan

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem primrecRel_mem_e : PrimrecRel fun n k => k ∈ e n :=
  primrecRel_testBit_true.of_eq fun n k => by simp [e.mem]

def eMax (n : ℕ) : ℕ := Nat.findGreatest (fun k => n.testBit k = true) n

theorem primrec_eMax : Primrec eMax := by
  exact (Primrec.nat_findGreatest Primrec.id primrecRel_testBit_true).of_eq fun _ =>
    rfl

theorem primrecRel_e_subset : PrimrecRel fun n m => e n ⊆ e m :=
  (Primrec.eq.comp primrec_e_subsetBool (Primrec.const true)).of_eq fun p =>
    eSubsetBool_iff p.1 p.2

theorem primrecPred_e_eq_union :
    PrimrecPred fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2 :=
  (Primrec.eq.comp primrec_e_eqUnionBool (Primrec.const true)).of_eq fun t =>
    eEqUnionBool_iff t.1 t.2.1 t.2.2

/-- Scott (1976), §1: membership, inclusion, union-equality for `e`, and `eMax`. -/
theorem scott_e_primrec_structure :
    PrimrecRel (fun n k => k ∈ e n) ∧
      Primrec eMax ∧
        PrimrecRel (fun n m => e n ⊆ e m) ∧
          PrimrecPred (fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2) :=
  ⟨primrecRel_mem_e, primrec_eMax, primrecRel_e_subset, primrecPred_e_eq_union⟩

end DomainTheory.DataTypesAsLattices
```

2

ePrimrec.lean

```
module
```

```
public import Mathlib.Computability.Primrec.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.e
import DomainTheory.DataTypesAsLattices.Pomega.eScan

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem primrecRel_mem_e : PrimrecRel fun n k => k ∈ e n :=
  primrecRel_testBit_true.of_eq fun n k => by simp [e.mem]

def eMax (n : ℕ) : ℕ := Nat.findGreatest (fun k => n.testBit k = true) n

theorem primrec_eMax : Primrec eMax := by
  exact (Primrec.nat_findGreatest Primrec.id primrecRel_testBit_true).of_eq fun _ =>
    rfl

theorem primrecRel_e_subset : PrimrecRel fun n m => e n ⊆ e m :=
  (Primrec.eq.comp primrec_e_subsetBool (Primrec.const true)).of_eq fun p =>
    eSubsetBool_iff p.1 p.2

theorem primrecPred_e_eq_union :
    PrimrecPred fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2 :=
  (Primrec.eq.comp primrec_e_eqUnionBool (Primrec.const true)).of_eq fun t =>
    eEqUnionBool_iff t.1 t.2.1 t.2.2

/-- Scott (1976), §1: membership, inclusion, union-equality for `e`, and `eMax`. -/
theorem scott_e_primrec_structure :
    PrimrecRel (fun n k => k ∈ e n) ∧
      Primrec eMax ∧
        PrimrecRel (fun n m => e n ⊆ e m) ∧
          PrimrecPred (fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2) :=
  ⟨primrecRel_mem_e, primrec_eMax, primrecRel_e_subset, primrecPred_e_eq_union⟩

end DomainTheory.DataTypesAsLattices
```

3

ePrimrec.lean

```
module

public import Mathlib.Computability.Primrec.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.e
import DomainTheory.DataTypesAsLattices.Pomega.eScan

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem primrecRel_mem_e : PrimrecRel fun n k => k ∈ e n :=
  primrecRel_testBit_true.of_eq fun n k => by simp [e.mem]

def eMax (n : ℕ) : ℕ := Nat.findGreatest (fun k => n.testBit k = true) n
```

```
theorem primrec_eMax : Primrec eMax := by
  exact (Primrec.nat_findGreatest Primrec.id primrecRel_testBit_true).of_eq fun _ =>
    rfl

theorem primrecRel_e_subset : PrimrecRel fun n m => e n ⊆ e m :=
  (Primrec.eq.comp primrec_e_subsetBool (Primrec.const true)).of_eq fun p =>
    eSubsetBool_iff p.1 p.2

theorem primrecPred_e_eq_union :
    PrimrecPred fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2 :=
  (Primrec.eq.comp primrec_e_eqUnionBool (Primrec.const true)).of_eq fun t =>
    eEqUnionBool_iff t.1 t.2.1 t.2.2

/-- Scott (1976), §1: membership, inclusion, union-equality for `e`, and `eMax`. -/
theorem scott_e_primrec_structure :
    PrimrecRel (fun n k => k ∈ e n) ∧
      Primrec eMax ∧
        PrimrecRel (fun n m => e n ⊆ e m) ∧
          PrimrecPred (fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2) :=
  ⟨primrecRel_mem_e, primrec_eMax, primrecRel_e_subset, primrecPred_e_eq_union⟩

end DomainTheory.DataTypesAsLattices
```

4

ePrimrec.lean

```
module

public import Mathlib.Computability.Primrec.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.e
import DomainTheory.DataTypesAsLattices.Pomega.eScan

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem primrecRel_mem_e : PrimrecRel fun n k => k ∈ e n :=
  primrecRel_testBit_true.of_eq fun n k => by simp [e.mem]

def eMax (n : ℕ) : ℕ := Nat.findGreatest (fun k => n.testBit k = true) n

theorem primrec_eMax : Primrec eMax := by
  exact (Primrec.nat_findGreatest Primrec.id primrecRel_testBit_true).of_eq fun _ =>
    rfl

theorem primrecRel_e_subset : PrimrecRel fun n m => e n ⊆ e m :=
  (Primrec.eq.comp primrec_e_subsetBool (Primrec.const true)).of_eq fun p =>
    eSubsetBool_iff p.1 p.2

theorem primrecPred_e_eq_union :
    PrimrecPred fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2 :=
  (Primrec.eq.comp primrec_e_eqUnionBool (Primrec.const true)).of_eq fun t =>
    eEqUnionBool_iff t.1 t.2.1 t.2.2

/-- Scott (1976), §1: membership, inclusion, union-equality for `e`, and `eMax`. -/
```

```
theorem scott_e_primrec_structure :
    PrimrecRel (fun n k => k ∈ e n) ∧
      Primrec eMax ∧
        PrimrecRel (fun n m => e n ⊆ e m) ∧
          PrimrecPred (fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2) :=
  ⟨primrecRel_mem_e, primrec_eMax, primrecRel_e_subset, primrecPred_e_eq_union⟩

end DomainTheory.DataTypesAsLattices
```

5

ePrimrec.lean

```
module

public import Mathlib.Computability.Primrec.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.e
import DomainTheory.DataTypesAsLattices.Pomega.eScan

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem primrecRel_mem_e : PrimrecRel fun n k => k ∈ e n :=
  primrecRel_testBit_true.of_eq fun n k => by simp [e.mem]

def eMax (n : ℕ) : ℕ := Nat.findGreatest (fun k => n.testBit k = true) n

theorem primrec_eMax : Primrec eMax := by
  exact (Primrec.nat_findGreatest Primrec.id primrecRel_testBit_true).of_eq fun _ =>
    rfl

theorem primrecRel_e_subset : PrimrecRel fun n m => e n ⊆ e m :=
  (Primrec.eq.comp primrec_e_subsetBool (Primrec.const true)).of_eq fun p =>
    eSubsetBool_iff p.1 p.2

theorem primrecPred_e_eq_union :
    PrimrecPred fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2 :=
  (Primrec.eq.comp primrec_e_eqUnionBool (Primrec.const true)).of_eq fun t =>
    eEqUnionBool_iff t.1 t.2.1 t.2.2

/-- Scott (1976), §1: membership, inclusion, union-equality for `e`, and `eMax`. -/
theorem scott_e_primrec_structure :
    PrimrecRel (fun n k => k ∈ e n) ∧
      Primrec eMax ∧
        PrimrecRel (fun n m => e n ⊆ e m) ∧
          PrimrecPred (fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2) :=
  ⟨primrecRel_mem_e, primrec_eMax, primrecRel_e_subset, primrecPred_e_eq_union⟩

end DomainTheory.DataTypesAsLattices
```

6

ePrimrec.lean

```
module
```

```
public import Mathlib.Computability.Primrec.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.e
import DomainTheory.DataTypesAsLattices.Pomega.eScan

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem primrecRel_mem_e : PrimrecRel fun n k => k ∈ e n :=
  primrecRel_testBit_true.of_eq fun n k => by simp [e.mem]

def eMax (n : ℕ) : ℕ := Nat.findGreatest (fun k => n.testBit k = true) n

theorem primrec_eMax : Primrec eMax := by
  exact (Primrec.nat_findGreatest Primrec.id primrecRel_testBit_true).of_eq fun _ =>
    rfl

theorem primrecRel_e_subset : PrimrecRel fun n m => e n ⊆ e m :=
  (Primrec.eq.comp primrec_e_subsetBool (Primrec.const true)).of_eq fun p =>
    eSubsetBool_iff p.1 p.2

theorem primrecPred_e_eq_union :
    PrimrecPred fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2 :=
  (Primrec.eq.comp primrec_e_eqUnionBool (Primrec.const true)).of_eq fun t =>
    eEqUnionBool_iff t.1 t.2.1 t.2.2

/-- Scott (1976), §1: membership, inclusion, union-equality for `e`, and `eMax`. -/
theorem scott_e_primrec_structure :
    PrimrecRel (fun n k => k ∈ e n) ∧
      Primrec eMax ∧
        PrimrecRel (fun n m => e n ⊆ e m) ∧
          PrimrecPred (fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2) :=
  ⟨primrecRel_mem_e, primrec_eMax, primrecRel_e_subset, primrecPred_e_eq_union⟩

end DomainTheory.DataTypesAsLattices
```

7

ePrimrec.lean

```
module

public import Mathlib.Computability.Primrec.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.e
import DomainTheory.DataTypesAsLattices.Pomega.eScan

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem primrecRel_mem_e : PrimrecRel fun n k => k ∈ e n :=
  primrecRel_testBit_true.of_eq fun n k => by simp [e.mem]

def eMax (n : ℕ) : ℕ := Nat.findGreatest (fun k => n.testBit k = true) n
```

```
theorem primrec_eMax : Primrec eMax := by
  exact (Primrec.nat_findGreatest Primrec.id primrecRel_testBit_true).of_eq fun _ =>
    rfl

theorem primrecRel_e_subset : PrimrecRel fun n m => e n ⊆ e m :=
  (Primrec.eq.comp primrec_e_subsetBool (Primrec.const true)).of_eq fun p =>
    eSubsetBool_iff p.1 p.2

theorem primrecPred_e_eq_union :
    PrimrecPred fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2 :=
  (Primrec.eq.comp primrec_e_eqUnionBool (Primrec.const true)).of_eq fun t =>
    eEqUnionBool_iff t.1 t.2.1 t.2.2

/-- Scott (1976), §1: membership, inclusion, union-equality for `e`, and `eMax`. -/
theorem scott_e_primrec_structure :
    PrimrecRel (fun n k => k ∈ e n) ∧
      Primrec eMax ∧
        PrimrecRel (fun n m => e n ⊆ e m) ∧
          PrimrecPred (fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2) :=
  ⟨primrecRel_mem_e, primrec_eMax, primrecRel_e_subset, primrecPred_e_eq_union⟩

end DomainTheory.DataTypesAsLattices
```

8

ePrimrec.lean

```
module

public import Mathlib.Computability.Primrec.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.e
import DomainTheory.DataTypesAsLattices.Pomega.eScan

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem primrecRel_mem_e : PrimrecRel fun n k => k ∈ e n :=
  primrecRel_testBit_true.of_eq fun n k => by simp [e.mem]

def eMax (n : ℕ) : ℕ := Nat.findGreatest (fun k => n.testBit k = true) n

theorem primrec_eMax : Primrec eMax := by
  exact (Primrec.nat_findGreatest Primrec.id primrecRel_testBit_true).of_eq fun _ =>
    rfl

theorem primrecRel_e_subset : PrimrecRel fun n m => e n ⊆ e m :=
  (Primrec.eq.comp primrec_e_subsetBool (Primrec.const true)).of_eq fun p =>
    eSubsetBool_iff p.1 p.2

theorem primrecPred_e_eq_union :
    PrimrecPred fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2 :=
  (Primrec.eq.comp primrec_e_eqUnionBool (Primrec.const true)).of_eq fun t =>
    eEqUnionBool_iff t.1 t.2.1 t.2.2

/-- Scott (1976), §1: membership, inclusion, union-equality for `e`, and `eMax`. -/
```

```
theorem scott_e_primrec_structure :
    PrimrecRel (fun n k => k ∈ e n) ∧
      Primrec eMax ∧
        PrimrecRel (fun n m => e n ⊆ e m) ∧
          PrimrecPred (fun t : ℕ × ℕ × ℕ => e t.1 = e t.2.1 ∪ e t.2.2) :=
  ⟨primrecRel_mem_e, primrec_eMax, primrecRel_e_subset, primrecPred_e_eq_union⟩

end DomainTheory.DataTypesAsLattices
```

9

codeFinset.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Data.Finset.Defs
public import Mathlib.Data.Multiset.Basic
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Bit-mask code of a list of naturals: bitwise OR of $2^k$ over entries. -/
def codeList : List ℕ → ℕ
  | [] => 0
  | k :: ks => 2 ^ k ||| codeList ks

theorem codeList_eq (ks : List ℕ) : e (codeList ks) = {k | k ∈ ks} := by
  induction ks with
  | nil => simp [codeList, zero]
  | cons k ks ih =>
    ext i
    simp [codeList, or, pow2, ih]

noncomputable def codeFinset (s : Finset ℕ) : ℕ := codeList s.val.toList

theorem codeFinset_eq (s : Finset ℕ) : e (codeFinset s) = (s : Set ℕ) := by
  ext k
  simp [codeFinset, codeList_eq]

theorem exists_code (s : Finset ℕ) : ∃ n, e n = (s : Set ℕ) :=
  ⟨codeFinset s, codeFinset_eq s⟩

theorem exists_code_of_finite {s : Pomega} (hs : Set.Finite s) :
    ∃ n, e n = s := by
  obtain ⟨t, ht⟩ := hs.exists_finset_coe
  exact ⟨codeFinset t, ht ▸ codeFinset_eq t⟩

end e

end DomainTheory.DataTypesAsLattices
```

0

codeFinset.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Data.Finset.Defs
public import Mathlib.Data.Multiset.Basic
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Bit-mask code of a list of naturals: bitwise OR of $2^k$ over entries. -/
def codeList : List ℕ → ℕ
  | [] => 0
  | k :: ks => 2 ^ k ||| codeList ks

theorem codeList_eq (ks : List ℕ) : e (codeList ks) = {k | k ∈ ks} := by
  induction ks with
  | nil => simp [codeList, zero]
  | cons k ks ih =>
    ext i
    simp [codeList, or, pow2, ih]

noncomputable def codeFinset (s : Finset ℕ) : ℕ := codeList s.val.toList

theorem codeFinset_eq (s : Finset ℕ) : e (codeFinset s) = (s : Set ℕ) := by
  ext k
  simp [codeFinset, codeList_eq]

theorem exists_code (s : Finset ℕ) : ∃ n, e n = (s : Set ℕ) :=
  ⟨codeFinset s, codeFinset_eq s⟩

theorem exists_code_of_finite {s : Pomega} (hs : Set.Finite s) :
    ∃ n, e n = s := by
  obtain ⟨t, ht⟩ := hs.exists_finset_coe
  exact ⟨codeFinset t, ht ▸ codeFinset_eq t⟩

end e

end DomainTheory.DataTypesAsLattices
```

1

codeFinset.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Data.Finset.Defs
public import Mathlib.Data.Multiset.Basic
```

```
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Bit-mask code of a list of naturals: bitwise OR of $2^k$ over entries. -/
def codeList : List ℕ → ℕ
  | [] => 0
  | k :: ks => 2 ^ k ||| codeList ks

theorem codeList_eq (ks : List ℕ) : e (codeList ks) = {k | k ∈ ks} := by
  induction ks with
  | nil => simp [codeList, zero]
  | cons k ks ih =>
    ext i
    simp [codeList, or, pow2, ih]

noncomputable def codeFinset (s : Finset ℕ) : ℕ := codeList s.val.toList

theorem codeFinset_eq (s : Finset ℕ) : e (codeFinset s) = (s : Set ℕ) := by
  ext k
  simp [codeFinset, codeList_eq]

theorem exists_code (s : Finset ℕ) : ∃ n, e n = (s : Set ℕ) :=
  ⟨codeFinset s, codeFinset_eq s⟩

theorem exists_code_of_finite {s : Pomega} (hs : Set.Finite s) :
    ∃ n, e n = s := by
  obtain ⟨t, ht⟩ := hs.exists_finset_coe
  exact ⟨codeFinset t, ht ▸ codeFinset_eq t⟩

end e

end DomainTheory.DataTypesAsLattices
```

2

codeFinset.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Data.Finset.Defs
public import Mathlib.Data.Multiset.Basic
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Bit-mask code of a list of naturals: bitwise OR of $2^k$ over entries. -/
```

```
def codeList : List ℕ → ℕ
  | [] => 0
  | k :: ks => 2 ^ k ||| codeList ks

theorem codeList_eq (ks : List ℕ) : e (codeList ks) = {k | k ∈ ks} := by
  induction ks with
  | nil => simp [codeList, zero]
  | cons k ks ih =>
    ext i
    simp [codeList, or, pow2, ih]

noncomputable def codeFinset (s : Finset ℕ) : ℕ := codeList s.val.toList

theorem codeFinset_eq (s : Finset ℕ) : e (codeFinset s) = (s : Set ℕ) := by
  ext k
  simp [codeFinset, codeList_eq]

theorem exists_code (s : Finset ℕ) : ∃ n, e n = (s : Set ℕ) :=
  ⟨codeFinset s, codeFinset_eq s⟩

theorem exists_code_of_finite {s : Pomega} (hs : Set.Finite s) :
    ∃ n, e n = s := by
  obtain ⟨t, ht⟩ := hs.exists_finset_coe
  exact ⟨codeFinset t, ht ▸ codeFinset_eq t⟩

end e

end DomainTheory.DataTypesAsLattices
```

3

codeFinset.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Data.Finset.Defs
public import Mathlib.Data.Multiset.Basic
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Bit-mask code of a list of naturals: bitwise OR of $2^k$ over entries. -/
def codeList : List ℕ → ℕ
  | [] => 0
  | k :: ks => 2 ^ k ||| codeList ks

theorem codeList_eq (ks : List ℕ) : e (codeList ks) = {k | k ∈ ks} := by
  induction ks with
  | nil => simp [codeList, zero]
  | cons k ks ih =>
    ext i
```

```
    simp [codeList, or, pow2, ih]

noncomputable def codeFinset (s : Finset ℕ) : ℕ := codeList s.val.toList

theorem codeFinset_eq (s : Finset ℕ) : e (codeFinset s) = (s : Set ℕ) := by
  ext k
  simp [codeFinset, codeList_eq]

theorem exists_code (s : Finset ℕ) : ∃ n, e n = (s : Set ℕ) :=
  ⟨codeFinset s, codeFinset_eq s⟩

theorem exists_code_of_finite {s : Pomega} (hs : Set.Finite s) :
    ∃ n, e n = s := by
  obtain ⟨t, ht⟩ := hs.exists_finset_coe
  exact ⟨codeFinset t, ht ▸ codeFinset_eq t⟩

end e

end DomainTheory.DataTypesAsLattices
```

4

codeFinset.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Data.Finset.Defs
public import Mathlib.Data.Multiset.Basic
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Bit-mask code of a list of naturals: bitwise OR of $2^k$ over entries. -/
def codeList : List ℕ → ℕ
  | [] => 0
  | k :: ks => 2 ^ k ||| codeList ks

theorem codeList_eq (ks : List ℕ) : e (codeList ks) = {k | k ∈ ks} := by
  induction ks with
  | nil => simp [codeList, zero]
  | cons k ks ih =>
    ext i
    simp [codeList, or, pow2, ih]

noncomputable def codeFinset (s : Finset ℕ) : ℕ := codeList s.val.toList

theorem codeFinset_eq (s : Finset ℕ) : e (codeFinset s) = (s : Set ℕ) := by
  ext k
  simp [codeFinset, codeList_eq]

theorem exists_code (s : Finset ℕ) : ∃ n, e n = (s : Set ℕ) :=
```

```
  ⟨codeFinset s, codeFinset_eq s⟩

theorem exists_code_of_finite {s : Pomega} (hs : Set.Finite s) :
    ∃ n, e n = s := by
  obtain ⟨t, ht⟩ := hs.exists_finset_coe
  exact ⟨codeFinset t, ht ▸ codeFinset_eq t⟩

end e

end DomainTheory.DataTypesAsLattices
```

5

codeFinset.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Data.Finset.Defs
public import Mathlib.Data.Multiset.Basic
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Bit-mask code of a list of naturals: bitwise OR of $2^k$ over entries. -/
def codeList : List ℕ → ℕ
  | [] => 0
  | k :: ks => 2 ^ k ||| codeList ks

theorem codeList_eq (ks : List ℕ) : e (codeList ks) = {k | k ∈ ks} := by
  induction ks with
  | nil => simp [codeList, zero]
  | cons k ks ih =>
    ext i
    simp [codeList, or, pow2, ih]

noncomputable def codeFinset (s : Finset ℕ) : ℕ := codeList s.val.toList

theorem codeFinset_eq (s : Finset ℕ) : e (codeFinset s) = (s : Set ℕ) := by
  ext k
  simp [codeFinset, codeList_eq]

theorem exists_code (s : Finset ℕ) : ∃ n, e n = (s : Set ℕ) :=
  ⟨codeFinset s, codeFinset_eq s⟩

theorem exists_code_of_finite {s : Pomega} (hs : Set.Finite s) :
    ∃ n, e n = s := by
  obtain ⟨t, ht⟩ := hs.exists_finset_coe
  exact ⟨codeFinset t, ht ▸ codeFinset_eq t⟩

end e
```

```
end DomainTheory.DataTypesAsLattices
```

6

codeFinset.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Data.Finset.Defs
public import Mathlib.Data.Multiset.Basic
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Bit-mask code of a list of naturals: bitwise OR of $2^k$ over entries. -/
def codeList : List ℕ → ℕ
  | [] => 0
  | k :: ks => 2 ^ k ||| codeList ks

theorem codeList_eq (ks : List ℕ) : e (codeList ks) = {k | k ∈ ks} := by
  induction ks with
  | nil => simp [codeList, zero]
  | cons k ks ih =>
    ext i
    simp [codeList, or, pow2, ih]

noncomputable def codeFinset (s : Finset ℕ) : ℕ := codeList s.val.toList

theorem codeFinset_eq (s : Finset ℕ) : e (codeFinset s) = (s : Set ℕ) := by
  ext k
  simp [codeFinset, codeList_eq]

theorem exists_code (s : Finset ℕ) : ∃ n, e n = (s : Set ℕ) :=
  ⟨codeFinset s, codeFinset_eq s⟩

theorem exists_code_of_finite {s : Pomega} (hs : Set.Finite s) :
    ∃ n, e n = s := by
  obtain ⟨t, ht⟩ := hs.exists_finset_coe
  exact ⟨codeFinset t, ht ▸ codeFinset_eq t⟩

end e

end DomainTheory.DataTypesAsLattices
```

7

codeFinset.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
```

```
public import Mathlib.Data.Finset.Defs
public import Mathlib.Data.Multiset.Basic
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Bit-mask code of a list of naturals: bitwise OR of $2^k$ over entries. -/
def codeList : List ℕ → ℕ
  | [] => 0
  | k :: ks => 2 ^ k ||| codeList ks

theorem codeList_eq (ks : List ℕ) : e (codeList ks) = {k | k ∈ ks} := by
  induction ks with
  | nil => simp [codeList, zero]
  | cons k ks ih =>
    ext i
    simp [codeList, or, pow2, ih]

noncomputable def codeFinset (s : Finset ℕ) : ℕ := codeList s.val.toList

theorem codeFinset_eq (s : Finset ℕ) : e (codeFinset s) = (s : Set ℕ) := by
  ext k
  simp [codeFinset, codeList_eq]

theorem exists_code (s : Finset ℕ) : ∃ n, e n = (s : Set ℕ) :=
  ⟨codeFinset s, codeFinset_eq s⟩

theorem exists_code_of_finite {s : Pomega} (hs : Set.Finite s) :
    ∃ n, e n = s := by
  obtain ⟨t, ht⟩ := hs.exists_finset_coe
  exact ⟨codeFinset t, ht ▸ codeFinset_eq t⟩

end e

end DomainTheory.DataTypesAsLattices
```

8

codeFinset.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
public import Mathlib.Data.Finset.Defs
public import Mathlib.Data.Multiset.Basic
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e
```

```
/-- Bit-mask code of a list of naturals: bitwise OR of $2^k$ over entries. -/
def codeList : List ℕ → ℕ
  | [] => 0
  | k :: ks => 2 ^ k ||| codeList ks

theorem codeList_eq (ks : List ℕ) : e (codeList ks) = {k | k ∈ ks} := by
  induction ks with
  | nil => simp [codeList, zero]
  | cons k ks ih =>
    ext i
    simp [codeList, or, pow2, ih]

noncomputable def codeFinset (s : Finset ℕ) : ℕ := codeList s.val.toList

theorem codeFinset_eq (s : Finset ℕ) : e (codeFinset s) = (s : Set ℕ) := by
  ext k
  simp [codeFinset, codeList_eq]

theorem exists_code (s : Finset ℕ) : ∃ n, e n = (s : Set ℕ) :=
  ⟨codeFinset s, codeFinset_eq s⟩

theorem exists_code_of_finite {s : Pomega} (hs : Set.Finite s) :
    ∃ n, e n = s := by
  obtain ⟨t, ht⟩ := hs.exists_finset_coe
  exact ⟨codeFinset t, ht ▸ codeFinset_eq t⟩

end e

end DomainTheory.DataTypesAsLattices
```

9

eDense.lean

```
module

public import Mathlib.Order.SetNotation
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Attr.Core
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Elements of $e_n$ when $e_n \subseteq x$ (empty if $e_n \not\subseteq x$). -/
def below (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ e n}

theorem singleton_eq (k : ℕ) : ({k} : Pomega) = e (2 ^ k) := (pow2 k).symm
```

```
theorem exists_mem {x : Pomega} {k : ℕ} (hk : k ∈ x) :
    ∃ n, e n ⊆ x ∧ k ∈ e n :=
  ⟨2 ^ k, by simp [pow2, Set.singleton_subset_iff, hk], by simp [pow2]⟩

theorem union_below_eq (x : Pomega) : (⋃ n, below x n) = x := by
  ext k
  constructor
  · intro hk
    obtain ⟨n, hn, hke⟩ := Set.mem_iUnion.mp hk
    exact hn hke
  · intro hk
    refine Set.mem_iUnion.mpr ⟨2 ^ k, ?_⟩
    simp [below, pow2, Set.singleton_subset_iff, hk]

end e

end DomainTheory.DataTypesAsLattices
```

0

eDense.lean

```
module

public import Mathlib.Order.SetNotation
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Attr.Core
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Elements of $e_n$ when $e_n \subseteq x$ (empty if $e_n \not\subseteq x$). -/
def below (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ e n}

theorem singleton_eq (k : ℕ) : ({k} : Pomega) = e (2 ^ k) := (pow2 k).symm

theorem exists_mem {x : Pomega} {k : ℕ} (hk : k ∈ x) :
    ∃ n, e n ⊆ x ∧ k ∈ e n :=
  ⟨2 ^ k, by simp [pow2, Set.singleton_subset_iff, hk], by simp [pow2]⟩

theorem union_below_eq (x : Pomega) : (⋃ n, below x n) = x := by
  ext k
  constructor
  · intro hk
    obtain ⟨n, hn, hke⟩ := Set.mem_iUnion.mp hk
    exact hn hke
  · intro hk
    refine Set.mem_iUnion.mpr ⟨2 ^ k, ?_⟩
    simp [below, pow2, Set.singleton_subset_iff, hk]
```

```
end e

end DomainTheory.DataTypesAsLattices
```

1

eDense.lean

```
module

public import Mathlib.Order.SetNotation
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Attr.Core
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Elements of $e_n$ when $e_n \subseteq x$ (empty if $e_n \not\subseteq x$). -/
def below (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ e n}

theorem singleton_eq (k : ℕ) : ({k} : Pomega) = e (2 ^ k) := (pow2 k).symm

theorem exists_mem {x : Pomega} {k : ℕ} (hk : k ∈ x) :
    ∃ n, e n ⊆ x ∧ k ∈ e n :=
  ⟨2 ^ k, by simp [pow2, Set.singleton_subset_iff, hk], by simp [pow2]⟩

theorem union_below_eq (x : Pomega) : (⋃ n, below x n) = x := by
  ext k
  constructor
  · intro hk
    obtain ⟨n, hn, hke⟩ := Set.mem_iUnion.mp hk
    exact hn hke
  · intro hk
    refine Set.mem_iUnion.mpr ⟨2 ^ k, ?_⟩
    simp [below, pow2, Set.singleton_subset_iff, hk]

end e

end DomainTheory.DataTypesAsLattices
```

2

eDense.lean

```
module

public import Mathlib.Order.SetNotation
public import DomainTheory.DataTypesAsLattices.Pomega.e
```

```
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Attr.Core
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Elements of $e_n$ when $e_n \subseteq x$ (empty if $e_n \not\subseteq x$). -/
def below (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ e n}

theorem singleton_eq (k : ℕ) : ({k} : Pomega) = e (2 ^ k) := (pow2 k).symm

theorem exists_mem {x : Pomega} {k : ℕ} (hk : k ∈ x) :
    ∃ n, e n ⊆ x ∧ k ∈ e n :=
  ⟨2 ^ k, by simp [pow2, Set.singleton_subset_iff, hk], by simp [pow2]⟩

theorem union_below_eq (x : Pomega) : (⋃ n, below x n) = x := by
  ext k
  constructor
  · intro hk
    obtain ⟨n, hn, hke⟩ := Set.mem_iUnion.mp hk
    exact hn hke
  · intro hk
    refine Set.mem_iUnion.mpr ⟨2 ^ k, ?_⟩
    simp [below, pow2, Set.singleton_subset_iff, hk]

end e

end DomainTheory.DataTypesAsLattices
```

3

eDense.lean

```
module

public import Mathlib.Order.SetNotation
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Attr.Core
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Elements of $e_n$ when $e_n \subseteq x$ (empty if $e_n \not\subseteq x$). -/
def below (x : Pomega) (n : ℕ) : Pomega :=
```

```
  {k | e n ⊆ x ∧ k ∈ e n}

theorem singleton_eq (k : ℕ) : ({k} : Pomega) = e (2 ^ k) := (pow2 k).symm

theorem exists_mem {x : Pomega} {k : ℕ} (hk : k ∈ x) :
    ∃ n, e n ⊆ x ∧ k ∈ e n :=
  ⟨2 ^ k, by simp [pow2, Set.singleton_subset_iff, hk], by simp [pow2]⟩

theorem union_below_eq (x : Pomega) : (⋃ n, below x n) = x := by
  ext k
  constructor
  · intro hk
    obtain ⟨n, hn, hke⟩ := Set.mem_iUnion.mp hk
    exact hn hke
  · intro hk
    refine Set.mem_iUnion.mpr ⟨2 ^ k, ?_⟩
    simp [below, pow2, Set.singleton_subset_iff, hk]

end e

end DomainTheory.DataTypesAsLattices
```

4

eDense.lean

```
module

public import Mathlib.Order.SetNotation
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Attr.Core
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Elements of $e_n$ when $e_n \subseteq x$ (empty if $e_n \not\subseteq x$). -/
def below (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ e n}

theorem singleton_eq (k : ℕ) : ({k} : Pomega) = e (2 ^ k) := (pow2 k).symm

theorem exists_mem {x : Pomega} {k : ℕ} (hk : k ∈ x) :
    ∃ n, e n ⊆ x ∧ k ∈ e n :=
  ⟨2 ^ k, by simp [pow2, Set.singleton_subset_iff, hk], by simp [pow2]⟩

theorem union_below_eq (x : Pomega) : (⋃ n, below x n) = x := by
  ext k
  constructor
  · intro hk
    obtain ⟨n, hn, hke⟩ := Set.mem_iUnion.mp hk
```

```
    exact hn hke
  · intro hk
    refine Set.mem_iUnion.mpr ⟨2 ^ k, ?_⟩
    simp [below, pow2, Set.singleton_subset_iff, hk]

end e

end DomainTheory.DataTypesAsLattices
```

5

eDense.lean

```
module

public import Mathlib.Order.SetNotation
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Attr.Core
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Elements of $e_n$ when $e_n \subseteq x$ (empty if $e_n \not\subseteq x$). -/
def below (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ e n}

theorem singleton_eq (k : ℕ) : ({k} : Pomega) = e (2 ^ k) := (pow2 k).symm

theorem exists_mem {x : Pomega} {k : ℕ} (hk : k ∈ x) :
    ∃ n, e n ⊆ x ∧ k ∈ e n :=
  ⟨2 ^ k, by simp [pow2, Set.singleton_subset_iff, hk], by simp [pow2]⟩

theorem union_below_eq (x : Pomega) : (⋃ n, below x n) = x := by
  ext k
  constructor
  · intro hk
    obtain ⟨n, hn, hke⟩ := Set.mem_iUnion.mp hk
    exact hn hke
  · intro hk
    refine Set.mem_iUnion.mpr ⟨2 ^ k, ?_⟩
    simp [below, pow2, Set.singleton_subset_iff, hk]

end e

end DomainTheory.DataTypesAsLattices
```

6

eDense.lean

```
module

public import Mathlib.Order.SetNotation
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Attr.Core
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Elements of $e_n$ when $e_n \subseteq x$ (empty if $e_n \not\subseteq x$). -/
def below (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ e n}

theorem singleton_eq (k : ℕ) : ({k} : Pomega) = e (2 ^ k) := (pow2 k).symm

theorem exists_mem {x : Pomega} {k : ℕ} (hk : k ∈ x) :
    ∃ n, e n ⊆ x ∧ k ∈ e n :=
  ⟨2 ^ k, by simp [pow2, Set.singleton_subset_iff, hk], by simp [pow2]⟩

theorem union_below_eq (x : Pomega) : (⋃ n, below x n) = x := by
  ext k
  constructor
  · intro hk
    obtain ⟨n, hn, hke⟩ := Set.mem_iUnion.mp hk
    exact hn hke
  · intro hk
    refine Set.mem_iUnion.mpr ⟨2 ^ k, ?_⟩
    simp [below, pow2, Set.singleton_subset_iff, hk]

end e

end DomainTheory.DataTypesAsLattices
```

7

eDense.lean

```
module

public import Mathlib.Order.SetNotation
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Attr.Core
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
namespace e

/-- Elements of $e_n$ when $e_n \subseteq x$ (empty if $e_n \not\subseteq x$). -/
def below (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ e n}

theorem singleton_eq (k : ℕ) : ({k} : Pomega) = e (2 ^ k) := (pow2 k).symm

theorem exists_mem {x : Pomega} {k : ℕ} (hk : k ∈ x) :
    ∃ n, e n ⊆ x ∧ k ∈ e n :=
  ⟨2 ^ k, by simp [pow2, Set.singleton_subset_iff, hk], by simp [pow2]⟩

theorem union_below_eq (x : Pomega) : (⋃ n, below x n) = x := by
  ext k
  constructor
  · intro hk
    obtain ⟨n, hn, hke⟩ := Set.mem_iUnion.mp hk
    exact hn hke
  · intro hk
    refine Set.mem_iUnion.mpr ⟨2 ^ k, ?_⟩
    simp [below, pow2, Set.singleton_subset_iff, hk]

end e

end DomainTheory.DataTypesAsLattices
```

8

eDense.lean

```
module

public import Mathlib.Order.SetNotation
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Attr.Core
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace e

/-- Elements of $e_n$ when $e_n \subseteq x$ (empty if $e_n \not\subseteq x$). -/
def below (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ e n}

theorem singleton_eq (k : ℕ) : ({k} : Pomega) = e (2 ^ k) := (pow2 k).symm

theorem exists_mem {x : Pomega} {k : ℕ} (hk : k ∈ x) :
    ∃ n, e n ⊆ x ∧ k ∈ e n :=
  ⟨2 ^ k, by simp [pow2, Set.singleton_subset_iff, hk], by simp [pow2]⟩

theorem union_below_eq (x : Pomega) : (⋃ n, below x n) = x := by
```

```
  ext k
  constructor
  · intro hk
    obtain ⟨n, hn, hke⟩ := Set.mem_iUnion.mp hk
    exact hn hke
  · intro hk
    refine Set.mem_iUnion.mpr ⟨2 ^ k, ?_⟩
    simp [below, pow2, Set.singleton_subset_iff, hk]

end e

end DomainTheory.DataTypesAsLattices
```

9

pair.lean

```
module

public import Aesop.BuiltinRules
public import Mathlib.Data.Nat.Notation
public import Mathlib.Tactic.ToAdditive
public import Mathlib.Tactic.ToDual
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Nat.Find
import Mathlib.Order.Basic
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Finiteness.Attr
import Mathlib.Tactic.SetLike
import Mathlib.Tactic.Widget.Calc

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def pair (n m : ℕ) : ℕ := (n + m) * (n + m + 1) / 2 + m

def triangle (w : ℕ) : ℕ := w * (w + 1) / 2

theorem pair_eq_triangle (n m : ℕ) : pair n m = triangle (n + m) + m := rfl

theorem triangle_succ (w : ℕ) : triangle (w + 1) = triangle w + (w + 1) := by
  have hex : (w + 1) * (w + 2) = w * (w + 1) + 2 * (w + 1) := by
    calc
      (w + 1) * (w + 2) = (w + 1) * w + (w + 1) * 2 := Nat.mul_add _ _ _
      _ = w * (w + 1) + 2 * (w + 1) := by
        rw [Nat.mul_comm (w + 1) w, Nat.mul_comm (w + 1) 2]
  simp only [triangle]
  rw [show (w + 1) * ((w + 1) + 1) = (w + 1) * (w + 2) from rfl, hex]
  exact Nat.add_mul_div_left _ _ (by decide : 0 < 2)

theorem exists_triangle_bucket (k : ℕ) :
    ∃ w, triangle w ≤ k ∧ k < triangle (w + 1) := by
  let P := fun w : ℕ => k < triangle (w + 1)
  have hP : ∃ w, P w := ⟨k, by
    change k < triangle (k + 1)
```

```
    rw [triangle_succ]
    exact lt_of_lt_of_le (Nat.lt_succ_self k) (Nat.le_add_left (k + 1) _)⟩
  let w := Nat.find hP
  refine ⟨w, ?_, Nat.find_spec hP⟩
  cases hw : w with
  | zero => exact Nat.zero_le k
  | succ w' =>
    have hmin : ¬ P w' :=
      Nat.find_min hP (Nat.lt_of_succ_le (by
        have : w = Nat.find hP := rfl
        rw [← this, hw]))
    exact Nat.le_of_not_gt hmin

theorem exists_pair (k : ℕ) : ∃ n m, pair n m = k := by
  obtain ⟨w, hle, hlt⟩ := exists_triangle_bucket k
  refine ⟨w - (k - triangle w), k - triangle w, ?_⟩
  have hlt' : k < triangle w + w + 1 := by
    have : k < triangle w + (w + 1) := by rwa [triangle_succ] at hlt
    exact Nat.add_assoc (triangle w) w 1 ▶ this
  have hk : k ≤ triangle w + w := Nat.lt_succ_iff.mp hlt'
  have hm : k - triangle w ≤ w :=
    Nat.le_of_add_le_add_left ((Nat.add_sub_of_le hle).symm ▶ hk)
  have : w - (k - triangle w) + (k - triangle w) = w := Nat.sub_add_cancel hm
  rw [pair_eq_triangle, this, Nat.add_sub_of_le hle]

noncomputable def unpair (k : ℕ) : ℕ × ℕ :=
  ((exists_pair k).choose, (exists_pair k).choose_spec.choose)

theorem pair_le_left (n m : ℕ) : n ≤ pair n m := by
  have htri : n ≤ triangle (n + m) := by
    cases n with
    | zero => exact Nat.zero_le _
    | succ n =>
      have hmul : n.succ * 2 ≤ (n.succ + m) * (n.succ + m + 1) :=
        Nat.mul_le_mul
          (Nat.le_add_right n.succ m)
          (Nat.succ_le_succ
            (Nat.le_trans (Nat.succ_le_succ (Nat.zero_le n)) (Nat.le_add_right n.succ
   m)))
      exact (Nat.le_div_iff_mul_le (by decide : 0 < 2)).mpr hmul
  exact htri.trans (Nat.le_add_right _ _)

theorem pair_lt_left (n m : ℕ) : n < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_left n m)

theorem pair_le_right (n m : ℕ) : m ≤ pair n m :=
  Nat.le_add_left _ _

theorem pair_lt_right (n m : ℕ) : m < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_right n m)

theorem pair_unpair (k : ℕ) : pair (unpair k).1 (unpair k).2 = k :=
  (exists_pair k).choose_spec.choose_spec

theorem triangle_le_of_le {a b : ℕ} (h : a ≤ b) : triangle a ≤ triangle b := by
  induction h with
```

```
  | refl => exact le_rfl
  | step h ih =>
    rw [triangle_succ]
    exact le_trans ih (Nat.le_add_right _ _)

theorem triangle_le_pair (n m : ℕ) :
    triangle (n + m) ≤ pair n m ∧ pair n m < triangle (n + m + 1) := by
  constructor
  · exact Nat.le_add_right _ _
  · rw [triangle_succ]
    exact Nat.add_lt_add_left (Nat.lt_succ_of_le (Nat.le_add_left m n)) _

theorem triangle_lt_of_lt {a b : ℕ} (h : a < b) : triangle a < triangle b := by
  have : a + 1 ≤ b := Nat.succ_le_of_lt h
  calc
    triangle a < triangle a + (a + 1) := Nat.lt_add_of_pos_right (Nat.succ_pos _)
    _ = triangle (a + 1) := (triangle_succ a).symm
    _ ≤ triangle b := triangle_le_of_le this

theorem pair_inj {n₁ m₁ n₂ m₂ : ℕ} (h : pair n₁ m₁ = pair n₂ m₂) :
    n₁ = n₂ ∧ m₁ = m₂ := by
  have h1 := triangle_le_pair n₁ m₁
  have h2 := triangle_le_pair n₂ m₂
  have hw : n₁ + m₁ = n₂ + m₂ := by
    rcases lt_trichotomy (n₁ + m₁) (n₂ + m₂) with hlt | heq | hgt
    · have hle : triangle (n₁ + m₁ + 1) ≤ triangle (n₂ + m₂) :=
        triangle_le_of_le (Nat.succ_le_of_lt hlt)
      have : pair n₁ m₁ < pair n₁ m₁ :=
        calc
          pair n₁ m₁ < triangle (n₁ + m₁ + 1) := h1.2
          _ ≤ triangle (n₂ + m₂) := hle
          _ ≤ pair n₂ m₂ := h2.1
          _ = pair n₁ m₁ := h.symm
      exact (lt_irrefl _ this).elim
    · exact heq
    · have hle : triangle (n₂ + m₂ + 1) ≤ triangle (n₁ + m₁) :=
        triangle_le_of_le (Nat.succ_le_of_lt hgt)
      have : pair n₂ m₂ < pair n₂ m₂ :=
        calc
          pair n₂ m₂ < triangle (n₂ + m₂ + 1) := h2.2
          _ ≤ triangle (n₁ + m₁) := hle
          _ ≤ pair n₁ m₁ := h1.1
          _ = pair n₂ m₂ := h
      exact (lt_irrefl _ this).elim
  have hm : m₁ = m₂ := by
    have : triangle (n₁ + m₁) + m₁ = triangle (n₂ + m₂) + m₂ := h
    rw [hw] at this
    exact Nat.add_left_cancel this
  have hn : n₁ = n₂ := Nat.add_right_cancel (hw.trans (by rw [hm]))
  exact ⟨hn, hm⟩

theorem unpair_pair (n m : ℕ) : unpair (pair n m) = (n, m) := by
  have h := pair_unpair (pair n m)
  exact Prod.ext (pair_inj h).1 (pair_inj h).2

end DomainTheory.DataTypesAsLattices
```

pair.lean

```
module

public import Aesop.BuiltinRules
public import Mathlib.Data.Nat.Notation
public import Mathlib.Tactic.ToAdditive
public import Mathlib.Tactic.ToDual
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Nat.Find
import Mathlib.Order.Basic
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Finiteness.Attr
import Mathlib.Tactic.SetLike
import Mathlib.Tactic.Widget.Calc

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def pair (n m : ℕ) : ℕ := (n + m) * (n + m + 1) / 2 + m

def triangle (w : ℕ) : ℕ := w * (w + 1) / 2

theorem pair_eq_triangle (n m : ℕ) : pair n m = triangle (n + m) + m := rfl

theorem triangle_succ (w : ℕ) : triangle (w + 1) = triangle w + (w + 1) := by
  have hex : (w + 1) * (w + 2) = w * (w + 1) + 2 * (w + 1) := by
    calc
      (w + 1) * (w + 2) = (w + 1) * w + (w + 1) * 2 := Nat.mul_add _ _ _
      _ = w * (w + 1) + 2 * (w + 1) := by
        rw [Nat.mul_comm (w + 1) w, Nat.mul_comm (w + 1) 2]
  simp only [triangle]
  rw [show (w + 1) * ((w + 1) + 1) = (w + 1) * (w + 2) from rfl, hex]
  exact Nat.add_mul_div_left _ _ (by decide : 0 < 2)

theorem exists_triangle_bucket (k : ℕ) :
    ∃ w, triangle w ≤ k ∧ k < triangle (w + 1) := by
  let P := fun w : ℕ => k < triangle (w + 1)
  have hP : ∃ w, P w := ⟨k, by
    change k < triangle (k + 1)
    rw [triangle_succ]
    exact lt_of_lt_of_le (Nat.lt_succ_self k) (Nat.le_add_left (k + 1) _)⟩
  let w := Nat.find hP
  refine ⟨w, ?_, Nat.find_spec hP⟩
  cases hw : w with
  | zero => exact Nat.zero_le k
  | succ w' =>
    have hmin : ¬ P w' :=
      Nat.find_min hP (Nat.lt_of_succ_le (by
        have : w = Nat.find hP := rfl
        rw [← this, hw]))
    exact Nat.le_of_not_gt hmin
```

```
theorem exists_pair (k : ℕ) : ∃ n m, pair n m = k := by
  obtain ⟨w, hle, hlt⟩ := exists_triangle_bucket k
  refine ⟨w - (k - triangle w), k - triangle w, ?_⟩
  have hlt' : k < triangle w + w + 1 := by
    have : k < triangle w + (w + 1) := by rwa [triangle_succ] at hlt
    exact Nat.add_assoc (triangle w) w 1 ▸ this
  have hk : k ≤ triangle w + w := Nat.lt_succ_iff.mp hlt'
  have hm : k - triangle w ≤ w :=
    Nat.le_of_add_le_add_left ((Nat.add_sub_of_le hle).symm ▸ hk)
  have : w - (k - triangle w) + (k - triangle w) = w := Nat.sub_add_cancel hm
  rw [pair_eq_triangle, this, Nat.add_sub_of_le hle]

noncomputable def unpair (k : ℕ) : ℕ × ℕ :=
  ((exists_pair k).choose, (exists_pair k).choose_spec.choose)

theorem pair_le_left (n m : ℕ) : n ≤ pair n m := by
  have htri : n ≤ triangle (n + m) := by
    cases n with
    | zero => exact Nat.zero_le _
    | succ n =>
      have hmul : n.succ * 2 ≤ (n.succ + m) * (n.succ + m + 1) :=
        Nat.mul_le_mul
          (Nat.le_add_right n.succ m)
          (Nat.succ_le_succ
            (Nat.le_trans (Nat.succ_le_succ (Nat.zero_le n)) (Nat.le_add_right n.succ
    m)))
      exact (Nat.le_div_iff_mul_le (by decide : 0 < 2)).mpr hmul
  exact htri.trans (Nat.le_add_right _ _)

theorem pair_lt_left (n m : ℕ) : n < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_left n m)

theorem pair_le_right (n m : ℕ) : m ≤ pair n m :=
  Nat.le_add_left _ _

theorem pair_lt_right (n m : ℕ) : m < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_right n m)

theorem pair_unpair (k : ℕ) : pair (unpair k).1 (unpair k).2 = k :=
  (exists_pair k).choose_spec.choose_spec

theorem triangle_le_of_le {a b : ℕ} (h : a ≤ b) : triangle a ≤ triangle b := by
  induction h with
  | refl => exact le_rfl
  | step h ih =>
    rw [triangle_succ]
    exact le_trans ih (Nat.le_add_right _ _)

theorem triangle_le_pair (n m : ℕ) :
    triangle (n + m) ≤ pair n m ∧ pair n m < triangle (n + m + 1) := by
  constructor
  · exact Nat.le_add_right _ _
  · rw [triangle_succ]
    exact Nat.add_lt_add_left (Nat.lt_succ_of_le (Nat.le_add_left m n)) _

theorem triangle_lt_of_lt {a b : ℕ} (h : a < b) : triangle a < triangle b := by
```

```
  have : a + 1 ≤ b := Nat.succ_le_of_lt h
  calc
    triangle a < triangle a + (a + 1) := Nat.lt_add_of_pos_right (Nat.succ_pos _)
    _ = triangle (a + 1) := (triangle_succ a).symm
    _ ≤ triangle b := triangle_le_of_le this

theorem pair_inj {n₁ m₁ n₂ m₂ : ℕ} (h : pair n₁ m₁ = pair n₂ m₂) :
    n₁ = n₂ ∧ m₁ = m₂ := by
  have h1 := triangle_le_pair n₁ m₁
  have h2 := triangle_le_pair n₂ m₂
  have hw : n₁ + m₁ = n₂ + m₂ := by
    rcases lt_trichotomy (n₁ + m₁) (n₂ + m₂) with hlt | heq | hgt
    · have hle : triangle (n₁ + m₁ + 1) ≤ triangle (n₂ + m₂) :=
        triangle_le_of_le (Nat.succ_le_of_lt hlt)
      have : pair n₁ m₁ < pair n₁ m₁ :=
        calc
          pair n₁ m₁ < triangle (n₁ + m₁ + 1) := h1.2
          _ ≤ triangle (n₂ + m₂) := hle
          _ ≤ pair n₂ m₂ := h2.1
          _ = pair n₁ m₁ := h.symm
      exact (lt_irrefl _ this).elim
    · exact heq
    · have hle : triangle (n₂ + m₂ + 1) ≤ triangle (n₁ + m₁) :=
        triangle_le_of_le (Nat.succ_le_of_lt hgt)
      have : pair n₂ m₂ < pair n₂ m₂ :=
        calc
          pair n₂ m₂ < triangle (n₂ + m₂ + 1) := h2.2
          _ ≤ triangle (n₁ + m₁) := hle
          _ ≤ pair n₁ m₁ := h1.1
          _ = pair n₂ m₂ := h
      exact (lt_irrefl _ this).elim
  have hm : m₁ = m₂ := by
    have : triangle (n₁ + m₁) + m₁ = triangle (n₂ + m₂) + m₂ := h
    rw [hw] at this
    exact Nat.add_left_cancel this
  have hn : n₁ = n₂ := Nat.add_right_cancel (hw.trans (by rw [hm]))
  exact ⟨hn, hm⟩

theorem unpair_pair (n m : ℕ) : unpair (pair n m) = (n, m) := by
  have h := pair_unpair (pair n m)
  exact Prod.ext (pair_inj h).1 (pair_inj h).2

end DomainTheory.DataTypesAsLattices
```

1

pair.lean

```
module

public import Aesop.BuiltinRules
public import Mathlib.Data.Nat.Notation
public import Mathlib.Tactic.ToAdditive
public import Mathlib.Tactic.ToDual
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Nat.Find
```

```
import Mathlib.Order.Basic
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Finiteness.Attr
import Mathlib.Tactic.SetLike
import Mathlib.Tactic.Widget.Calc

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def pair (n m : ℕ) : ℕ := (n + m) * (n + m + 1) / 2 + m

def triangle (w : ℕ) : ℕ := w * (w + 1) / 2

theorem pair_eq_triangle (n m : ℕ) : pair n m = triangle (n + m) + m := rfl

theorem triangle_succ (w : ℕ) : triangle (w + 1) = triangle w + (w + 1) := by
  have hex : (w + 1) * (w + 2) = w * (w + 1) + 2 * (w + 1) := by
    calc
      (w + 1) * (w + 2) = (w + 1) * w + (w + 1) * 2 := Nat.mul_add _ _ _
      _ = w * (w + 1) + 2 * (w + 1) := by
        rw [Nat.mul_comm (w + 1) w, Nat.mul_comm (w + 1) 2]
  simp only [triangle]
  rw [show (w + 1) * ((w + 1) + 1) = (w + 1) * (w + 2) from rfl, hex]
  exact Nat.add_mul_div_left _ _ (by decide : 0 < 2)

theorem exists_triangle_bucket (k : ℕ) :
    ∃ w, triangle w ≤ k ∧ k < triangle (w + 1) := by
  let P := fun w : ℕ => k < triangle (w + 1)
  have hP : ∃ w, P w := ⟨k, by
    change k < triangle (k + 1)
    rw [triangle_succ]
    exact lt_of_lt_of_le (Nat.lt_succ_self k) (Nat.le_add_left (k + 1) _)⟩
  let w := Nat.find hP
  refine ⟨w, ?_, Nat.find_spec hP⟩
  cases hw : w with
  | zero => exact Nat.zero_le k
  | succ w' =>
    have hmin : ¬ P w' :=
      Nat.find_min hP (Nat.lt_of_succ_le (by
        have : w = Nat.find hP := rfl
        rw [← this, hw]))
    exact Nat.le_of_not_gt hmin

theorem exists_pair (k : ℕ) : ∃ n m, pair n m = k := by
  obtain ⟨w, hle, hlt⟩ := exists_triangle_bucket k
  refine ⟨w - (k - triangle w), k - triangle w, ?_⟩
  have hlt' : k < triangle w + w + 1 := by
    have : k < triangle w + (w + 1) := by rwa [triangle_succ] at hlt
    exact Nat.add_assoc (triangle w) w 1 ▸ this
  have hk : k ≤ triangle w + w := Nat.lt_succ_iff.mp hlt'
  have hm : k - triangle w ≤ w :=
    Nat.le_of_add_le_add_left ((Nat.add_sub_of_le hle).symm ▸ hk)
  have : w - (k - triangle w) + (k - triangle w) = w := Nat.sub_add_cancel hm
  rw [pair_eq_triangle, this, Nat.add_sub_of_le hle]
```

```
noncomputable def unpair (k : ℕ) : ℕ × ℕ :=
  ((exists_pair k).choose, (exists_pair k).choose_spec.choose)

theorem pair_le_left (n m : ℕ) : n ≤ pair n m := by
  have htri : n ≤ triangle (n + m) := by
    cases n with
    | zero => exact Nat.zero_le _
    | succ n =>
      have hmul : n.succ * 2 ≤ (n.succ + m) * (n.succ + m + 1) :=
        Nat.mul_le_mul
          (Nat.le_add_right n.succ m)
          (Nat.succ_le_succ
            (Nat.le_trans (Nat.succ_le_succ (Nat.zero_le n)) (Nat.le_add_right n.succ
   m)))
      exact (Nat.le_div_iff_mul_le (by decide : 0 < 2)).mpr hmul
  exact htri.trans (Nat.le_add_right _ _)

theorem pair_lt_left (n m : ℕ) : n < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_left n m)

theorem pair_le_right (n m : ℕ) : m ≤ pair n m :=
  Nat.le_add_left _ _

theorem pair_lt_right (n m : ℕ) : m < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_right n m)

theorem pair_unpair (k : ℕ) : pair (unpair k).1 (unpair k).2 = k :=
  (exists_pair k).choose_spec.choose_spec

theorem triangle_le_of_le {a b : ℕ} (h : a ≤ b) : triangle a ≤ triangle b := by
  induction h with
  | refl => exact le_rfl
  | step h ih =>
    rw [triangle_succ]
    exact le_trans ih (Nat.le_add_right _ _)

theorem triangle_le_pair (n m : ℕ) :
    triangle (n + m) ≤ pair n m ∧ pair n m < triangle (n + m + 1) := by
  constructor
  · exact Nat.le_add_right _ _
  · rw [triangle_succ]
    exact Nat.add_lt_add_left (Nat.lt_succ_of_le (Nat.le_add_left m n)) _

theorem triangle_lt_of_lt {a b : ℕ} (h : a < b) : triangle a < triangle b := by
  have : a + 1 ≤ b := Nat.succ_le_of_lt h
  calc
    triangle a < triangle a + (a + 1) := Nat.lt_add_of_pos_right (Nat.succ_pos _)
    _ = triangle (a + 1) := (triangle_succ a).symm
    _ ≤ triangle b := triangle_le_of_le this

theorem pair_inj {n₁ m₁ n₂ m₂ : ℕ} (h : pair n₁ m₁ = pair n₂ m₂) :
    n₁ = n₂ ∧ m₁ = m₂ := by
  have h1 := triangle_le_pair n₁ m₁
  have h2 := triangle_le_pair n₂ m₂
  have hw : n₁ + m₁ = n₂ + m₂ := by
    rcases lt_trichotomy (n₁ + m₁) (n₂ + m₂) with hlt | heq | hgt
```

```
    · have hle : triangle (n₁ + m₁ + 1) ≤ triangle (n₂ + m₂) :=
        triangle_le_of_le (Nat.succ_le_of_lt hlt)
      have : pair n₁ m₁ < pair n₁ m₁ :=
        calc
          pair n₁ m₁ < triangle (n₁ + m₁ + 1) := h1.2
          _ ≤ triangle (n₂ + m₂) := hle
          _ ≤ pair n₂ m₂ := h2.1
          _ = pair n₁ m₁ := h.symm
      exact (lt_irrefl _ this).elim
    · exact heq
    · have hle : triangle (n₂ + m₂ + 1) ≤ triangle (n₁ + m₁) :=
        triangle_le_of_le (Nat.succ_le_of_lt hgt)
      have : pair n₂ m₂ < pair n₂ m₂ :=
        calc
          pair n₂ m₂ < triangle (n₂ + m₂ + 1) := h2.2
          _ ≤ triangle (n₁ + m₁) := hle
          _ ≤ pair n₁ m₁ := h1.1
          _ = pair n₂ m₂ := h
      exact (lt_irrefl _ this).elim
  have hm : m₁ = m₂ := by
    have : triangle (n₁ + m₁) + m₁ = triangle (n₂ + m₂) + m₂ := h
    rw [hw] at this
    exact Nat.add_left_cancel this
  have hn : n₁ = n₂ := Nat.add_right_cancel (hw.trans (by rw [hm]))
  exact ⟨hn, hm⟩

theorem unpair_pair (n m : ℕ) : unpair (pair n m) = (n, m) := by
  have h := pair_unpair (pair n m)
  exact Prod.ext (pair_inj h).1 (pair_inj h).2

end DomainTheory.DataTypesAsLattices
```

2

pair.lean

```
module

public import Aesop.BuiltinRules
public import Mathlib.Data.Nat.Notation
public import Mathlib.Tactic.ToAdditive
public import Mathlib.Tactic.ToDual
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Nat.Find
import Mathlib.Order.Basic
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Finiteness.Attr
import Mathlib.Tactic.SetLike
import Mathlib.Tactic.Widget.Calc

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def pair (n m : ℕ) : ℕ := (n + m) * (n + m + 1) / 2 + m
```

```
def triangle (w : ℕ) : ℕ := w * (w + 1) / 2

theorem pair_eq_triangle (n m : ℕ) : pair n m = triangle (n + m) + m := rfl

theorem triangle_succ (w : ℕ) : triangle (w + 1) = triangle w + (w + 1) := by
  have hex : (w + 1) * (w + 2) = w * (w + 1) + 2 * (w + 1) := by
    calc
      (w + 1) * (w + 2) = (w + 1) * w + (w + 1) * 2 := Nat.mul_add _ _ _
      _ = w * (w + 1) + 2 * (w + 1) := by
        rw [Nat.mul_comm (w + 1) w, Nat.mul_comm (w + 1) 2]
  simp only [triangle]
  rw [show (w + 1) * ((w + 1) + 1) = (w + 1) * (w + 2) from rfl, hex]
  exact Nat.add_mul_div_left _ _ (by decide : 0 < 2)

theorem exists_triangle_bucket (k : ℕ) :
    ∃ w, triangle w ≤ k ∧ k < triangle (w + 1) := by
  let P := fun w : ℕ => k < triangle (w + 1)
  have hP : ∃ w, P w := ⟨k, by
    change k < triangle (k + 1)
    rw [triangle_succ]
    exact lt_of_lt_of_le (Nat.lt_succ_self k) (Nat.le_add_left (k + 1) _)⟩
  let w := Nat.find hP
  refine ⟨w, ?_, Nat.find_spec hP⟩
  cases hw : w with
  | zero => exact Nat.zero_le k
  | succ w' =>
    have hmin : ¬ P w' :=
      Nat.find_min hP (Nat.lt_of_succ_le (by
        have : w = Nat.find hP := rfl
        rw [← this, hw]))
    exact Nat.le_of_not_gt hmin

theorem exists_pair (k : ℕ) : ∃ n m, pair n m = k := by
  obtain ⟨w, hle, hlt⟩ := exists_triangle_bucket k
  refine ⟨w - (k - triangle w), k - triangle w, ?_⟩
  have hlt' : k < triangle w + w + 1 := by
    have : k < triangle w + (w + 1) := by rwa [triangle_succ] at hlt
    exact Nat.add_assoc (triangle w) w 1 ▸ this
  have hk : k ≤ triangle w + w := Nat.lt_succ_iff.mp hlt'
  have hm : k - triangle w ≤ w :=
    Nat.le_of_add_le_add_left ((Nat.add_sub_of_le hle).symm ▸ hk)
  have : w - (k - triangle w) + (k - triangle w) = w := Nat.sub_add_cancel hm
  rw [pair_eq_triangle, this, Nat.add_sub_of_le hle]

noncomputable def unpair (k : ℕ) : ℕ × ℕ :=
  ((exists_pair k).choose, (exists_pair k).choose_spec.choose)

theorem pair_le_left (n m : ℕ) : n ≤ pair n m := by
  have htri : n ≤ triangle (n + m) := by
    cases n with
    | zero => exact Nat.zero_le _
    | succ n =>
      have hmul : n.succ * 2 ≤ (n.succ + m) * (n.succ + m + 1) :=
        Nat.mul_le_mul
          (Nat.le_add_right n.succ m)
          (Nat.succ_le_succ
```

```
            (Nat.le_trans (Nat.succ_le_succ (Nat.zero_le n)) (Nat.le_add_right n.succ
    m)))
      exact (Nat.le_div_iff_mul_le (by decide : 0 < 2)).mpr hmul
  exact htri.trans (Nat.le_add_right _ _)

theorem pair_lt_left (n m : ℕ) : n < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_left n m)

theorem pair_le_right (n m : ℕ) : m ≤ pair n m :=
  Nat.le_add_left _ _

theorem pair_lt_right (n m : ℕ) : m < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_right n m)

theorem pair_unpair (k : ℕ) : pair (unpair k).1 (unpair k).2 = k :=
  (exists_pair k).choose_spec.choose_spec

theorem triangle_le_of_le {a b : ℕ} (h : a ≤ b) : triangle a ≤ triangle b := by
  induction h with
  | refl => exact le_rfl
  | step h ih =>
    rw [triangle_succ]
    exact le_trans ih (Nat.le_add_right _ _)

theorem triangle_le_pair (n m : ℕ) :
    triangle (n + m) ≤ pair n m ∧ pair n m < triangle (n + m + 1) := by
  constructor
  · exact Nat.le_add_right _ _
  · rw [triangle_succ]
    exact Nat.add_lt_add_left (Nat.lt_succ_of_le (Nat.le_add_left m n)) _

theorem triangle_lt_of_lt {a b : ℕ} (h : a < b) : triangle a < triangle b := by
  have : a + 1 ≤ b := Nat.succ_le_of_lt h
  calc
    triangle a < triangle a + (a + 1) := Nat.lt_add_of_pos_right (Nat.succ_pos _)
    _ = triangle (a + 1) := (triangle_succ a).symm
    _ ≤ triangle b := triangle_le_of_le this

theorem pair_inj {n₁ m₁ n₂ m₂ : ℕ} (h : pair n₁ m₁ = pair n₂ m₂) :
    n₁ = n₂ ∧ m₁ = m₂ := by
  have h1 := triangle_le_pair n₁ m₁
  have h2 := triangle_le_pair n₂ m₂
  have hw : n₁ + m₁ = n₂ + m₂ := by
    rcases lt_trichotomy (n₁ + m₁) (n₂ + m₂) with hlt | heq | hgt
    · have hle : triangle (n₁ + m₁ + 1) ≤ triangle (n₂ + m₂) :=
        triangle_le_of_le (Nat.succ_le_of_lt hlt)
      have : pair n₁ m₁ < pair n₁ m₁ :=
        calc
          pair n₁ m₁ < triangle (n₁ + m₁ + 1) := h1.2
          _ ≤ triangle (n₂ + m₂) := hle
          _ ≤ pair n₂ m₂ := h2.1
          _ = pair n₁ m₁ := h.symm
      exact (lt_irrefl _ this).elim
    · exact heq
    · have hle : triangle (n₂ + m₂ + 1) ≤ triangle (n₁ + m₁) :=
        triangle_le_of_le (Nat.succ_le_of_lt hgt)
```

```
      have : pair n₂ m₂ < pair n₂ m₂ :=
        calc
          pair n₂ m₂ < triangle (n₂ + m₂ + 1) := h2.2
          _ ≤ triangle (n₁ + m₁) := hle
          _ ≤ pair n₁ m₁ := h1.1
          _ = pair n₂ m₂ := h
      exact (lt_irrefl _ this).elim
  have hm : m₁ = m₂ := by
    have : triangle (n₁ + m₁) + m₁ = triangle (n₂ + m₂) + m₂ := h
    rw [hw] at this
    exact Nat.add_left_cancel this
  have hn : n₁ = n₂ := Nat.add_right_cancel (hw.trans (by rw [hm]))
  exact ⟨hn, hm⟩

theorem unpair_pair (n m : ℕ) : unpair (pair n m) = (n, m) := by
  have h := pair_unpair (pair n m)
  exact Prod.ext (pair_inj h).1 (pair_inj h).2

end DomainTheory.DataTypesAsLattices
```

3

pair.lean

```
module

public import Aesop.BuiltinRules
public import Mathlib.Data.Nat.Notation
public import Mathlib.Tactic.ToAdditive
public import Mathlib.Tactic.ToDual
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Nat.Find
import Mathlib.Order.Basic
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Finiteness.Attr
import Mathlib.Tactic.SetLike
import Mathlib.Tactic.Widget.Calc

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def pair (n m : ℕ) : ℕ := (n + m) * (n + m + 1) / 2 + m

def triangle (w : ℕ) : ℕ := w * (w + 1) / 2

theorem pair_eq_triangle (n m : ℕ) : pair n m = triangle (n + m) + m := rfl

theorem triangle_succ (w : ℕ) : triangle (w + 1) = triangle w + (w + 1) := by
  have hex : (w + 1) * (w + 2) = w * (w + 1) + 2 * (w + 1) := by
    calc
      (w + 1) * (w + 2) = (w + 1) * w + (w + 1) * 2 := Nat.mul_add _ _ _
      _ = w * (w + 1) + 2 * (w + 1) := by
        rw [Nat.mul_comm (w + 1) w, Nat.mul_comm (w + 1) 2]
  simp only [triangle]
  rw [show (w + 1) * ((w + 1) + 1) = (w + 1) * (w + 2) from rfl, hex]
```

```
  exact Nat.add_mul_div_left _ _ (by decide : 0 < 2)

theorem exists_triangle_bucket (k : ℕ) :
    ∃ w, triangle w ≤ k ∧ k < triangle (w + 1) := by
  let P := fun w : ℕ => k < triangle (w + 1)
  have hP : ∃ w, P w := ⟨k, by
    change k < triangle (k + 1)
    rw [triangle_succ]
    exact lt_of_lt_of_le (Nat.lt_succ_self k) (Nat.le_add_left (k + 1) _)⟩
  let w := Nat.find hP
  refine ⟨w, ?_, Nat.find_spec hP⟩
  cases hw : w with
  | zero => exact Nat.zero_le k
  | succ w' =>
    have hmin : ¬ P w' :=
      Nat.find_min hP (Nat.lt_of_succ_le (by
        have : w = Nat.find hP := rfl
        rw [← this, hw]))
    exact Nat.le_of_not_gt hmin

theorem exists_pair (k : ℕ) : ∃ n m, pair n m = k := by
  obtain ⟨w, hle, hlt⟩ := exists_triangle_bucket k
  refine ⟨w - (k - triangle w), k - triangle w, ?_⟩
  have hlt' : k < triangle w + w + 1 := by
    have : k < triangle w + (w + 1) := by rwa [triangle_succ] at hlt
    exact Nat.add_assoc (triangle w) w 1 ▸ this
  have hk : k ≤ triangle w + w := Nat.lt_succ_iff.mp hlt'
  have hm : k - triangle w ≤ w :=
    Nat.le_of_add_le_add_left ((Nat.add_sub_of_le hle).symm ▸ hk)
  have : w - (k - triangle w) + (k - triangle w) = w := Nat.sub_add_cancel hm
  rw [pair_eq_triangle, this, Nat.add_sub_of_le hle]

noncomputable def unpair (k : ℕ) : ℕ × ℕ :=
  ((exists_pair k).choose, (exists_pair k).choose_spec.choose)

theorem pair_le_left (n m : ℕ) : n ≤ pair n m := by
  have htri : n ≤ triangle (n + m) := by
    cases n with
    | zero => exact Nat.zero_le _
    | succ n =>
      have hmul : n.succ * 2 ≤ (n.succ + m) * (n.succ + m + 1) :=
        Nat.mul_le_mul
          (Nat.le_add_right n.succ m)
          (Nat.succ_le_succ
            (Nat.le_trans (Nat.succ_le_succ (Nat.zero_le n)) (Nat.le_add_right n.succ
    m)))
      exact (Nat.le_div_iff_mul_le (by decide : 0 < 2)).mpr hmul
  exact htri.trans (Nat.le_add_right _ _)

theorem pair_lt_left (n m : ℕ) : n < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_left n m)

theorem pair_le_right (n m : ℕ) : m ≤ pair n m :=
  Nat.le_add_left _ _

theorem pair_lt_right (n m : ℕ) : m < pair n m + 1 :=
```

```
  Nat.lt_succ_of_le (pair_le_right n m)

theorem pair_unpair (k : ℕ) : pair (unpair k).1 (unpair k).2 = k :=
  (exists_pair k).choose_spec.choose_spec

theorem triangle_le_of_le {a b : ℕ} (h : a ≤ b) : triangle a ≤ triangle b := by
  induction h with
  | refl => exact le_rfl
  | step h ih =>
    rw [triangle_succ]
    exact le_trans ih (Nat.le_add_right _ _)

theorem triangle_le_pair (n m : ℕ) :
    triangle (n + m) ≤ pair n m ∧ pair n m < triangle (n + m + 1) := by
  constructor
  · exact Nat.le_add_right _ _
  · rw [triangle_succ]
    exact Nat.add_lt_add_left (Nat.lt_succ_of_le (Nat.le_add_left m n)) _

theorem triangle_lt_of_lt {a b : ℕ} (h : a < b) : triangle a < triangle b := by
  have : a + 1 ≤ b := Nat.succ_le_of_lt h
  calc
    triangle a < triangle a + (a + 1) := Nat.lt_add_of_pos_right (Nat.succ_pos _)
    _ = triangle (a + 1) := (triangle_succ a).symm
    _ ≤ triangle b := triangle_le_of_le this

theorem pair_inj {n₁ m₁ n₂ m₂ : ℕ} (h : pair n₁ m₁ = pair n₂ m₂) :
    n₁ = n₂ ∧ m₁ = m₂ := by
  have h1 := triangle_le_pair n₁ m₁
  have h2 := triangle_le_pair n₂ m₂
  have hw : n₁ + m₁ = n₂ + m₂ := by
    rcases lt_trichotomy (n₁ + m₁) (n₂ + m₂) with hlt | heq | hgt
    · have hle : triangle (n₁ + m₁ + 1) ≤ triangle (n₂ + m₂) :=
        triangle_le_of_le (Nat.succ_le_of_lt hlt)
      have : pair n₁ m₁ < pair n₁ m₁ :=
        calc
          pair n₁ m₁ < triangle (n₁ + m₁ + 1) := h1.2
          _ ≤ triangle (n₂ + m₂) := hle
          _ ≤ pair n₂ m₂ := h2.1
          _ = pair n₁ m₁ := h.symm
      exact (lt_irrefl _ this).elim
    · exact heq
    · have hle : triangle (n₂ + m₂ + 1) ≤ triangle (n₁ + m₁) :=
        triangle_le_of_le (Nat.succ_le_of_lt hgt)
      have : pair n₂ m₂ < pair n₂ m₂ :=
        calc
          pair n₂ m₂ < triangle (n₂ + m₂ + 1) := h2.2
          _ ≤ triangle (n₁ + m₁) := hle
          _ ≤ pair n₁ m₁ := h1.1
          _ = pair n₂ m₂ := h
      exact (lt_irrefl _ this).elim
  have hm : m₁ = m₂ := by
    have : triangle (n₁ + m₁) + m₁ = triangle (n₂ + m₂) + m₂ := h
    rw [hw] at this
    exact Nat.add_left_cancel this
  have hn : n₁ = n₂ := Nat.add_right_cancel (hw.trans (by rw [hm]))
```

```
  exact ⟨hn, hm⟩

theorem unpair_pair (n m : ℕ) : unpair (pair n m) = (n, m) := by
  have h := pair_unpair (pair n m)
  exact Prod.ext (pair_inj h).1 (pair_inj h).2

end DomainTheory.DataTypesAsLattices
```

4

pair.lean

```
module

public import Aesop.BuiltinRules
public import Mathlib.Data.Nat.Notation
public import Mathlib.Tactic.ToAdditive
public import Mathlib.Tactic.ToDual
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Nat.Find
import Mathlib.Order.Basic
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Finiteness.Attr
import Mathlib.Tactic.SetLike
import Mathlib.Tactic.Widget.Calc

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def pair (n m : ℕ) : ℕ := (n + m) * (n + m + 1) / 2 + m

def triangle (w : ℕ) : ℕ := w * (w + 1) / 2

theorem pair_eq_triangle (n m : ℕ) : pair n m = triangle (n + m) + m := rfl

theorem triangle_succ (w : ℕ) : triangle (w + 1) = triangle w + (w + 1) := by
  have hex : (w + 1) * (w + 2) = w * (w + 1) + 2 * (w + 1) := by
    calc
      (w + 1) * (w + 2) = (w + 1) * w + (w + 1) * 2 := Nat.mul_add _ _ _
      _ = w * (w + 1) + 2 * (w + 1) := by
        rw [Nat.mul_comm (w + 1) w, Nat.mul_comm (w + 1) 2]
  simp only [triangle]
  rw [show (w + 1) * ((w + 1) + 1) = (w + 1) * (w + 2) from rfl, hex]
  exact Nat.add_mul_div_left _ _ (by decide : 0 < 2)

theorem exists_triangle_bucket (k : ℕ) :
    ∃ w, triangle w ≤ k ∧ k < triangle (w + 1) := by
  let P := fun w : ℕ => k < triangle (w + 1)
  have hP : ∃ w, P w := ⟨k, by
    change k < triangle (k + 1)
    rw [triangle_succ]
    exact lt_of_lt_of_le (Nat.lt_succ_self k) (Nat.le_add_left (k + 1) _)⟩
  let w := Nat.find hP
  refine ⟨w, ?_, Nat.find_spec hP⟩
  cases hw : w with
```

```
  | zero => exact Nat.zero_le k
  | succ w' =>
    have hmin : ¬ P w' :=
      Nat.find_min hP (Nat.lt_of_succ_le (by
        have : w = Nat.find hP := rfl
        rw [← this, hw]))
    exact Nat.le_of_not_gt hmin

theorem exists_pair (k : ℕ) : ∃ n m, pair n m = k := by
  obtain ⟨w, hle, hlt⟩ := exists_triangle_bucket k
  refine ⟨w - (k - triangle w), k - triangle w, ?_⟩
  have hlt' : k < triangle w + w + 1 := by
    have : k < triangle w + (w + 1) := by rwa [triangle_succ] at hlt
    exact Nat.add_assoc (triangle w) w 1 ▶ this
  have hk : k ≤ triangle w + w := Nat.lt_succ_iff.mp hlt'
  have hm : k - triangle w ≤ w :=
    Nat.le_of_add_le_add_left ((Nat.add_sub_of_le hle).symm ▶ hk)
  have : w - (k - triangle w) + (k - triangle w) = w := Nat.sub_add_cancel hm
  rw [pair_eq_triangle, this, Nat.add_sub_of_le hle]

noncomputable def unpair (k : ℕ) : ℕ × ℕ :=
  ((exists_pair k).choose, (exists_pair k).choose_spec.choose)

theorem pair_le_left (n m : ℕ) : n ≤ pair n m := by
  have htri : n ≤ triangle (n + m) := by
    cases n with
    | zero => exact Nat.zero_le _
    | succ n =>
      have hmul : n.succ * 2 ≤ (n.succ + m) * (n.succ + m + 1) :=
        Nat.mul_le_mul
          (Nat.le_add_right n.succ m)
          (Nat.succ_le_succ
            (Nat.le_trans (Nat.succ_le_succ (Nat.zero_le n)) (Nat.le_add_right n.succ
    m)))
      exact (Nat.le_div_iff_mul_le (by decide : 0 < 2)).mpr hmul
  exact htri.trans (Nat.le_add_right _ _)

theorem pair_lt_left (n m : ℕ) : n < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_left n m)

theorem pair_le_right (n m : ℕ) : m ≤ pair n m :=
  Nat.le_add_left _ _

theorem pair_lt_right (n m : ℕ) : m < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_right n m)

theorem pair_unpair (k : ℕ) : pair (unpair k).1 (unpair k).2 = k :=
  (exists_pair k).choose_spec.choose_spec

theorem triangle_le_of_le {a b : ℕ} (h : a ≤ b) : triangle a ≤ triangle b := by
  induction h with
  | refl => exact le_rfl
  | step h ih =>
    rw [triangle_succ]
    exact le_trans ih (Nat.le_add_right _ _)
```

```
theorem triangle_le_pair (n m : ℕ) :
    triangle (n + m) ≤ pair n m ∧ pair n m < triangle (n + m + 1) := by
  constructor
  · exact Nat.le_add_right _ _
  · rw [triangle_succ]
    exact Nat.add_lt_add_left (Nat.lt_succ_of_le (Nat.le_add_left m n)) _

theorem triangle_lt_of_lt {a b : ℕ} (h : a < b) : triangle a < triangle b := by
  have : a + 1 ≤ b := Nat.succ_le_of_lt h
  calc
    triangle a < triangle a + (a + 1) := Nat.lt_add_of_pos_right (Nat.succ_pos _)
    _ = triangle (a + 1) := (triangle_succ a).symm
    _ ≤ triangle b := triangle_le_of_le this

theorem pair_inj {n₁ m₁ n₂ m₂ : ℕ} (h : pair n₁ m₁ = pair n₂ m₂) :
    n₁ = n₂ ∧ m₁ = m₂ := by
  have h1 := triangle_le_pair n₁ m₁
  have h2 := triangle_le_pair n₂ m₂
  have hw : n₁ + m₁ = n₂ + m₂ := by
    rcases lt_trichotomy (n₁ + m₁) (n₂ + m₂) with hlt | heq | hgt
    · have hle : triangle (n₁ + m₁ + 1) ≤ triangle (n₂ + m₂) :=
        triangle_le_of_le (Nat.succ_le_of_lt hlt)
      have : pair n₁ m₁ < pair n₁ m₁ :=
        calc
          pair n₁ m₁ < triangle (n₁ + m₁ + 1) := h1.2
          _ ≤ triangle (n₂ + m₂) := hle
          _ ≤ pair n₂ m₂ := h2.1
          _ = pair n₁ m₁ := h.symm
      exact (lt_irrefl _ this).elim
    · exact heq
    · have hle : triangle (n₂ + m₂ + 1) ≤ triangle (n₁ + m₁) :=
        triangle_le_of_le (Nat.succ_le_of_lt hgt)
      have : pair n₂ m₂ < pair n₂ m₂ :=
        calc
          pair n₂ m₂ < triangle (n₂ + m₂ + 1) := h2.2
          _ ≤ triangle (n₁ + m₁) := hle
          _ ≤ pair n₁ m₁ := h1.1
          _ = pair n₂ m₂ := h
      exact (lt_irrefl _ this).elim
  have hm : m₁ = m₂ := by
    have : triangle (n₁ + m₁) + m₁ = triangle (n₂ + m₂) + m₂ := h
    rw [hw] at this
    exact Nat.add_left_cancel this
  have hn : n₁ = n₂ := Nat.add_right_cancel (hw.trans (by rw [hm]))
  exact ⟨hn, hm⟩

theorem unpair_pair (n m : ℕ) : unpair (pair n m) = (n, m) := by
  have h := pair_unpair (pair n m)
  exact Prod.ext (pair_inj h).1 (pair_inj h).2

end DomainTheory.DataTypesAsLattices
```

5

pair.lean

```
module

public import Aesop.BuiltinRules
public import Mathlib.Data.Nat.Notation
public import Mathlib.Tactic.ToAdditive
public import Mathlib.Tactic.ToDual
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Nat.Find
import Mathlib.Order.Basic
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Finiteness.Attr
import Mathlib.Tactic.SetLike
import Mathlib.Tactic.Widget.Calc

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def pair (n m : ℕ) : ℕ := (n + m) * (n + m + 1) / 2 + m

def triangle (w : ℕ) : ℕ := w * (w + 1) / 2

theorem pair_eq_triangle (n m : ℕ) : pair n m = triangle (n + m) + m := rfl

theorem triangle_succ (w : ℕ) : triangle (w + 1) = triangle w + (w + 1) := by
  have hex : (w + 1) * (w + 2) = w * (w + 1) + 2 * (w + 1) := by
    calc
      (w + 1) * (w + 2) = (w + 1) * w + (w + 1) * 2 := Nat.mul_add _ _ _
      _ = w * (w + 1) + 2 * (w + 1) := by
        rw [Nat.mul_comm (w + 1) w, Nat.mul_comm (w + 1) 2]
  simp only [triangle]
  rw [show (w + 1) * ((w + 1) + 1) = (w + 1) * (w + 2) from rfl, hex]
  exact Nat.add_mul_div_left _ _ (by decide : 0 < 2)

theorem exists_triangle_bucket (k : ℕ) :
    ∃ w, triangle w ≤ k ∧ k < triangle (w + 1) := by
  let P := fun w : ℕ => k < triangle (w + 1)
  have hP : ∃ w, P w := ⟨k, by
    change k < triangle (k + 1)
    rw [triangle_succ]
    exact lt_of_lt_of_le (Nat.lt_succ_self k) (Nat.le_add_left (k + 1) _)⟩
  let w := Nat.find hP
  refine ⟨w, ?_, Nat.find_spec hP⟩
  cases hw : w with
  | zero => exact Nat.zero_le k
  | succ w' =>
    have hmin : ¬ P w' :=
      Nat.find_min hP (Nat.lt_of_succ_le (by
        have : w = Nat.find hP := rfl
        rw [← this, hw]))
    exact Nat.le_of_not_gt hmin

theorem exists_pair (k : ℕ) : ∃ n m, pair n m = k := by
  obtain ⟨w, hle, hlt⟩ := exists_triangle_bucket k
  refine ⟨w - (k - triangle w), k - triangle w, ?_⟩
  have hlt' : k < triangle w + w + 1 := by
```

```
    have : k < triangle w + (w + 1) := by rwa [triangle_succ] at hlt
    exact Nat.add_assoc (triangle w) w 1 ▶ this
  have hk : k ≤ triangle w + w := Nat.lt_succ_iff.mp hlt'
  have hm : k - triangle w ≤ w :=
    Nat.le_of_add_le_add_left ((Nat.add_sub_of_le hle).symm ▶ hk)
  have : w - (k - triangle w) + (k - triangle w) = w := Nat.sub_add_cancel hm
  rw [pair_eq_triangle, this, Nat.add_sub_of_le hle]

noncomputable def unpair (k : ℕ) : ℕ × ℕ :=
  ((exists_pair k).choose, (exists_pair k).choose_spec.choose)

theorem pair_le_left (n m : ℕ) : n ≤ pair n m := by
  have htri : n ≤ triangle (n + m) := by
    cases n with
    | zero => exact Nat.zero_le _
    | succ n =>
      have hmul : n.succ * 2 ≤ (n.succ + m) * (n.succ + m + 1) :=
        Nat.mul_le_mul
          (Nat.le_add_right n.succ m)
          (Nat.succ_le_succ
            (Nat.le_trans (Nat.succ_le_succ (Nat.zero_le n)) (Nat.le_add_right n.succ
    m)))
      exact (Nat.le_div_iff_mul_le (by decide : 0 < 2)).mpr hmul
  exact htri.trans (Nat.le_add_right _ _)

theorem pair_lt_left (n m : ℕ) : n < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_left n m)

theorem pair_le_right (n m : ℕ) : m ≤ pair n m :=
  Nat.le_add_left _ _

theorem pair_lt_right (n m : ℕ) : m < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_right n m)

theorem pair_unpair (k : ℕ) : pair (unpair k).1 (unpair k).2 = k :=
  (exists_pair k).choose_spec.choose_spec

theorem triangle_le_of_le {a b : ℕ} (h : a ≤ b) : triangle a ≤ triangle b := by
  induction h with
  | refl => exact le_rfl
  | step h ih =>
    rw [triangle_succ]
    exact le_trans ih (Nat.le_add_right _ _)

theorem triangle_le_pair (n m : ℕ) :
    triangle (n + m) ≤ pair n m ∧ pair n m < triangle (n + m + 1) := by
  constructor
  · exact Nat.le_add_right _ _
  · rw [triangle_succ]
    exact Nat.add_lt_add_left (Nat.lt_succ_of_le (Nat.le_add_left m n)) _

theorem triangle_lt_of_lt {a b : ℕ} (h : a < b) : triangle a < triangle b := by
  have : a + 1 ≤ b := Nat.succ_le_of_lt h
  calc
    triangle a < triangle a + (a + 1) := Nat.lt_add_of_pos_right (Nat.succ_pos _)
    _ = triangle (a + 1) := (triangle_succ a).symm
```

```
    _ ≤ triangle b := triangle_le_of_le this

theorem pair_inj {n₁ m₁ n₂ m₂ : ℕ} (h : pair n₁ m₁ = pair n₂ m₂) :
    n₁ = n₂ ∧ m₁ = m₂ := by
  have h1 := triangle_le_pair n₁ m₁
  have h2 := triangle_le_pair n₂ m₂
  have hw : n₁ + m₁ = n₂ + m₂ := by
    rcases lt_trichotomy (n₁ + m₁) (n₂ + m₂) with hlt | heq | hgt
    · have hle : triangle (n₁ + m₁ + 1) ≤ triangle (n₂ + m₂) :=
        triangle_le_of_le (Nat.succ_le_of_lt hlt)
      have : pair n₁ m₁ < pair n₁ m₁ :=
        calc
          pair n₁ m₁ < triangle (n₁ + m₁ + 1) := h1.2
          _ ≤ triangle (n₂ + m₂) := hle
          _ ≤ pair n₂ m₂ := h2.1
          _ = pair n₁ m₁ := h.symm
      exact (lt_irrefl _ this).elim
    · exact heq
    · have hle : triangle (n₂ + m₂ + 1) ≤ triangle (n₁ + m₁) :=
        triangle_le_of_le (Nat.succ_le_of_lt hgt)
      have : pair n₂ m₂ < pair n₂ m₂ :=
        calc
          pair n₂ m₂ < triangle (n₂ + m₂ + 1) := h2.2
          _ ≤ triangle (n₁ + m₁) := hle
          _ ≤ pair n₁ m₁ := h1.1
          _ = pair n₂ m₂ := h
      exact (lt_irrefl _ this).elim
  have hm : m₁ = m₂ := by
    have : triangle (n₁ + m₁) + m₁ = triangle (n₂ + m₂) + m₂ := h
    rw [hw] at this
    exact Nat.add_left_cancel this
  have hn : n₁ = n₂ := Nat.add_right_cancel (hw.trans (by rw [hm]))
  exact ⟨hn, hm⟩

theorem unpair_pair (n m : ℕ) : unpair (pair n m) = (n, m) := by
  have h := pair_unpair (pair n m)
  exact Prod.ext (pair_inj h).1 (pair_inj h).2

end DomainTheory.DataTypesAsLattices
```

6

pair.lean

```
module

public import Aesop.BuiltinRules
public import Mathlib.Data.Nat.Notation
public import Mathlib.Tactic.ToAdditive
public import Mathlib.Tactic.ToDual
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Nat.Find
import Mathlib.Order.Basic
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Finiteness.Attr
import Mathlib.Tactic.SetLike
```

```
import Mathlib.Tactic.Widget.Calc

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def pair (n m : ℕ) : ℕ := (n + m) * (n + m + 1) / 2 + m

def triangle (w : ℕ) : ℕ := w * (w + 1) / 2

theorem pair_eq_triangle (n m : ℕ) : pair n m = triangle (n + m) + m := rfl

theorem triangle_succ (w : ℕ) : triangle (w + 1) = triangle w + (w + 1) := by
  have hex : (w + 1) * (w + 2) = w * (w + 1) + 2 * (w + 1) := by
    calc
      (w + 1) * (w + 2) = (w + 1) * w + (w + 1) * 2 := Nat.mul_add _ _ _
      _ = w * (w + 1) + 2 * (w + 1) := by
        rw [Nat.mul_comm (w + 1) w, Nat.mul_comm (w + 1) 2]
  simp only [triangle]
  rw [show (w + 1) * ((w + 1) + 1) = (w + 1) * (w + 2) from rfl, hex]
  exact Nat.add_mul_div_left _ _ (by decide : 0 < 2)

theorem exists_triangle_bucket (k : ℕ) :
    ∃ w, triangle w ≤ k ∧ k < triangle (w + 1) := by
  let P := fun w : ℕ => k < triangle (w + 1)
  have hP : ∃ w, P w := ⟨k, by
    change k < triangle (k + 1)
    rw [triangle_succ]
    exact lt_of_lt_of_le (Nat.lt_succ_self k) (Nat.le_add_left (k + 1) _)⟩
  let w := Nat.find hP
  refine ⟨w, ?_, Nat.find_spec hP⟩
  cases hw : w with
  | zero => exact Nat.zero_le k
  | succ w' =>
    have hmin : ¬ P w' :=
      Nat.find_min hP (Nat.lt_of_succ_le (by
        have : w = Nat.find hP := rfl
        rw [← this, hw]))
    exact Nat.le_of_not_gt hmin

theorem exists_pair (k : ℕ) : ∃ n m, pair n m = k := by
  obtain ⟨w, hle, hlt⟩ := exists_triangle_bucket k
  refine ⟨w - (k - triangle w), k - triangle w, ?_⟩
  have hlt' : k < triangle w + w + 1 := by
    have : k < triangle w + (w + 1) := by rwa [triangle_succ] at hlt
    exact Nat.add_assoc (triangle w) w 1 ▸ this
  have hk : k ≤ triangle w + w := Nat.lt_succ_iff.mp hlt'
  have hm : k - triangle w ≤ w :=
    Nat.le_of_add_le_add_left ((Nat.add_sub_of_le hle).symm ▸ hk)
  have : w - (k - triangle w) + (k - triangle w) = w := Nat.sub_add_cancel hm
  rw [pair_eq_triangle, this, Nat.add_sub_of_le hle]

noncomputable def unpair (k : ℕ) : ℕ × ℕ :=
  ((exists_pair k).choose, (exists_pair k).choose_spec.choose)

theorem pair_le_left (n m : ℕ) : n ≤ pair n m := by
```

```
  have htri : n ≤ triangle (n + m) := by
    cases n with
    | zero => exact Nat.zero_le _
    | succ n =>
      have hmul : n.succ * 2 ≤ (n.succ + m) * (n.succ + m + 1) :=
        Nat.mul_le_mul
          (Nat.le_add_right n.succ m)
          (Nat.succ_le_succ
            (Nat.le_trans (Nat.succ_le_succ (Nat.zero_le n)) (Nat.le_add_right n.succ
    m)))
      exact (Nat.le_div_iff_mul_le (by decide : 0 < 2)).mpr hmul
  exact htri.trans (Nat.le_add_right _ _)

theorem pair_lt_left (n m : ℕ) : n < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_left n m)

theorem pair_le_right (n m : ℕ) : m ≤ pair n m :=
  Nat.le_add_left _ _

theorem pair_lt_right (n m : ℕ) : m < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_right n m)

theorem pair_unpair (k : ℕ) : pair (unpair k).1 (unpair k).2 = k :=
  (exists_pair k).choose_spec.choose_spec

theorem triangle_le_of_le {a b : ℕ} (h : a ≤ b) : triangle a ≤ triangle b := by
  induction h with
  | refl => exact le_rfl
  | step h ih =>
    rw [triangle_succ]
    exact le_trans ih (Nat.le_add_right _ _)

theorem triangle_le_pair (n m : ℕ) :
    triangle (n + m) ≤ pair n m ∧ pair n m < triangle (n + m + 1) := by
  constructor
  · exact Nat.le_add_right _ _
  · rw [triangle_succ]
    exact Nat.add_lt_add_left (Nat.lt_succ_of_le (Nat.le_add_left m n)) _

theorem triangle_lt_of_lt {a b : ℕ} (h : a < b) : triangle a < triangle b := by
  have : a + 1 ≤ b := Nat.succ_le_of_lt h
  calc
    triangle a < triangle a + (a + 1) := Nat.lt_add_of_pos_right (Nat.succ_pos _)
    _ = triangle (a + 1) := (triangle_succ a).symm
    _ ≤ triangle b := triangle_le_of_le this

theorem pair_inj {n₁ m₁ n₂ m₂ : ℕ} (h : pair n₁ m₁ = pair n₂ m₂) :
    n₁ = n₂ ∧ m₁ = m₂ := by
  have h1 := triangle_le_pair n₁ m₁
  have h2 := triangle_le_pair n₂ m₂
  have hw : n₁ + m₁ = n₂ + m₂ := by
    rcases lt_trichotomy (n₁ + m₁) (n₂ + m₂) with hlt | heq | hgt
    · have hle : triangle (n₁ + m₁ + 1) ≤ triangle (n₂ + m₂) :=
        triangle_le_of_le (Nat.succ_le_of_lt hlt)
      have : pair n₁ m₁ < pair n₁ m₁ :=
        calc
```

```
          pair n₁ m₁ < triangle (n₁ + m₁ + 1) := h1.2
          _ ≤ triangle (n₂ + m₂) := hle
          _ ≤ pair n₂ m₂ := h2.1
          _ = pair n₁ m₁ := h.symm
      exact (lt_irrefl _ this).elim
    · exact heq
    · have hle : triangle (n₂ + m₂ + 1) ≤ triangle (n₁ + m₁) :=
        triangle_le_of_le (Nat.succ_le_of_lt hgt)
      have : pair n₂ m₂ < pair n₂ m₂ :=
        calc
          pair n₂ m₂ < triangle (n₂ + m₂ + 1) := h2.2
          _ ≤ triangle (n₁ + m₁) := hle
          _ ≤ pair n₁ m₁ := h1.1
          _ = pair n₂ m₂ := h
      exact (lt_irrefl _ this).elim
  have hm : m₁ = m₂ := by
    have : triangle (n₁ + m₁) + m₁ = triangle (n₂ + m₂) + m₂ := h
    rw [hw] at this
    exact Nat.add_left_cancel this
  have hn : n₁ = n₂ := Nat.add_right_cancel (hw.trans (by rw [hm]))
  exact ⟨hn, hm⟩

theorem unpair_pair (n m : ℕ) : unpair (pair n m) = (n, m) := by
  have h := pair_unpair (pair n m)
  exact Prod.ext (pair_inj h).1 (pair_inj h).2

end DomainTheory.DataTypesAsLattices
```

7

pair.lean

```
module

public import Aesop.BuiltinRules
public import Mathlib.Data.Nat.Notation
public import Mathlib.Tactic.ToAdditive
public import Mathlib.Tactic.ToDual
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Nat.Find
import Mathlib.Order.Basic
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Finiteness.Attr
import Mathlib.Tactic.SetLike
import Mathlib.Tactic.Widget.Calc

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def pair (n m : ℕ) : ℕ := (n + m) * (n + m + 1) / 2 + m

def triangle (w : ℕ) : ℕ := w * (w + 1) / 2

theorem pair_eq_triangle (n m : ℕ) : pair n m = triangle (n + m) + m := rfl
```

```
theorem triangle_succ (w : ℕ) : triangle (w + 1) = triangle w + (w + 1) := by
  have hex : (w + 1) * (w + 2) = w * (w + 1) + 2 * (w + 1) := by
    calc
      (w + 1) * (w + 2) = (w + 1) * w + (w + 1) * 2 := Nat.mul_add _ _ _
      _ = w * (w + 1) + 2 * (w + 1) := by
        rw [Nat.mul_comm (w + 1) w, Nat.mul_comm (w + 1) 2]
  simp only [triangle]
  rw [show (w + 1) * ((w + 1) + 1) = (w + 1) * (w + 2) from rfl, hex]
  exact Nat.add_mul_div_left _ _ (by decide : 0 < 2)

theorem exists_triangle_bucket (k : ℕ) :
    ∃ w, triangle w ≤ k ∧ k < triangle (w + 1) := by
  let P := fun w : ℕ => k < triangle (w + 1)
  have hP : ∃ w, P w := ⟨k, by
    change k < triangle (k + 1)
    rw [triangle_succ]
    exact lt_of_lt_of_le (Nat.lt_succ_self k) (Nat.le_add_left (k + 1) _)⟩
  let w := Nat.find hP
  refine ⟨w, ?_, Nat.find_spec hP⟩
  cases hw : w with
  | zero => exact Nat.zero_le k
  | succ w' =>
    have hmin : ¬ P w' :=
      Nat.find_min hP (Nat.lt_of_succ_le (by
        have : w = Nat.find hP := rfl
        rw [← this, hw]))
    exact Nat.le_of_not_gt hmin

theorem exists_pair (k : ℕ) : ∃ n m, pair n m = k := by
  obtain ⟨w, hle, hlt⟩ := exists_triangle_bucket k
  refine ⟨w - (k - triangle w), k - triangle w, ?_⟩
  have hlt' : k < triangle w + w + 1 := by
    have : k < triangle w + (w + 1) := by rwa [triangle_succ] at hlt
    exact Nat.add_assoc (triangle w) w 1 ▶ this
  have hk : k ≤ triangle w + w := Nat.lt_succ_iff.mp hlt'
  have hm : k - triangle w ≤ w :=
    Nat.le_of_add_le_add_left ((Nat.add_sub_of_le hle).symm ▶ hk)
  have : w - (k - triangle w) + (k - triangle w) = w := Nat.sub_add_cancel hm
  rw [pair_eq_triangle, this, Nat.add_sub_of_le hle]

noncomputable def unpair (k : ℕ) : ℕ × ℕ :=
  ((exists_pair k).choose, (exists_pair k).choose_spec.choose)

theorem pair_le_left (n m : ℕ) : n ≤ pair n m := by
  have htri : n ≤ triangle (n + m) := by
    cases n with
    | zero => exact Nat.zero_le _
    | succ n =>
      have hmul : n.succ * 2 ≤ (n.succ + m) * (n.succ + m + 1) :=
        Nat.mul_le_mul
          (Nat.le_add_right n.succ m)
          (Nat.succ_le_succ
            (Nat.le_trans (Nat.succ_le_succ (Nat.zero_le n)) (Nat.le_add_right n.succ
    m)))
      exact (Nat.le_div_iff_mul_le (by decide : 0 < 2)).mpr hmul
  exact htri.trans (Nat.le_add_right _ _)
```

```
theorem pair_lt_left (n m : ℕ) : n < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_left n m)

theorem pair_le_right (n m : ℕ) : m ≤ pair n m :=
  Nat.le_add_left _ _

theorem pair_lt_right (n m : ℕ) : m < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_right n m)

theorem pair_unpair (k : ℕ) : pair (unpair k).1 (unpair k).2 = k :=
  (exists_pair k).choose_spec.choose_spec

theorem triangle_le_of_le {a b : ℕ} (h : a ≤ b) : triangle a ≤ triangle b := by
  induction h with
  | refl => exact le_rfl
  | step h ih =>
    rw [triangle_succ]
    exact le_trans ih (Nat.le_add_right _ _)

theorem triangle_le_pair (n m : ℕ) :
    triangle (n + m) ≤ pair n m ∧ pair n m < triangle (n + m + 1) := by
  constructor
  · exact Nat.le_add_right _ _
  · rw [triangle_succ]
    exact Nat.add_lt_add_left (Nat.lt_succ_of_le (Nat.le_add_left m n)) _

theorem triangle_lt_of_lt {a b : ℕ} (h : a < b) : triangle a < triangle b := by
  have : a + 1 ≤ b := Nat.succ_le_of_lt h
  calc
    triangle a < triangle a + (a + 1) := Nat.lt_add_of_pos_right (Nat.succ_pos _)
    _ = triangle (a + 1) := (triangle_succ a).symm
    _ ≤ triangle b := triangle_le_of_le this

theorem pair_inj {n₁ m₁ n₂ m₂ : ℕ} (h : pair n₁ m₁ = pair n₂ m₂) :
    n₁ = n₂ ∧ m₁ = m₂ := by
  have h1 := triangle_le_pair n₁ m₁
  have h2 := triangle_le_pair n₂ m₂
  have hw : n₁ + m₁ = n₂ + m₂ := by
    rcases lt_trichotomy (n₁ + m₁) (n₂ + m₂) with hlt | heq | hgt
    · have hle : triangle (n₁ + m₁ + 1) ≤ triangle (n₂ + m₂) :=
        triangle_le_of_le (Nat.succ_le_of_lt hlt)
      have : pair n₁ m₁ < pair n₁ m₁ :=
        calc
          pair n₁ m₁ < triangle (n₁ + m₁ + 1) := h1.2
          _ ≤ triangle (n₂ + m₂) := hle
          _ ≤ pair n₂ m₂ := h2.1
          _ = pair n₁ m₁ := h.symm
      exact (lt_irrefl _ this).elim
    · exact heq
    · have hle : triangle (n₂ + m₂ + 1) ≤ triangle (n₁ + m₁) :=
        triangle_le_of_le (Nat.succ_le_of_lt hgt)
      have : pair n₂ m₂ < pair n₂ m₂ :=
        calc
          pair n₂ m₂ < triangle (n₂ + m₂ + 1) := h2.2
          _ ≤ triangle (n₁ + m₁) := hle
```

```
          _ ≤ pair n₁ m₁ := h1.1
          _ = pair n₂ m₂ := h
      exact (lt_irrefl _ this).elim
  have hm : m₁ = m₂ := by
    have : triangle (n₁ + m₁) + m₁ = triangle (n₂ + m₂) + m₂ := h
    rw [hw] at this
    exact Nat.add_left_cancel this
  have hn : n₁ = n₂ := Nat.add_right_cancel (hw.trans (by rw [hm]))
  exact ⟨hn, hm⟩

theorem unpair_pair (n m : ℕ) : unpair (pair n m) = (n, m) := by
  have h := pair_unpair (pair n m)
  exact Prod.ext (pair_inj h).1 (pair_inj h).2

end DomainTheory.DataTypesAsLattices
```

8

pair.lean

```
module

public import Aesop.BuiltinRules
public import Mathlib.Data.Nat.Notation
public import Mathlib.Tactic.ToAdditive
public import Mathlib.Tactic.ToDual
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Nat.Find
import Mathlib.Order.Basic
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Finiteness.Attr
import Mathlib.Tactic.SetLike
import Mathlib.Tactic.Widget.Calc

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def pair (n m : ℕ) : ℕ := (n + m) * (n + m + 1) / 2 + m

def triangle (w : ℕ) : ℕ := w * (w + 1) / 2

theorem pair_eq_triangle (n m : ℕ) : pair n m = triangle (n + m) + m := rfl

theorem triangle_succ (w : ℕ) : triangle (w + 1) = triangle w + (w + 1) := by
  have hex : (w + 1) * (w + 2) = w * (w + 1) + 2 * (w + 1) := by
    calc
      (w + 1) * (w + 2) = (w + 1) * w + (w + 1) * 2 := Nat.mul_add _ _ _
      _ = w * (w + 1) + 2 * (w + 1) := by
        rw [Nat.mul_comm (w + 1) w, Nat.mul_comm (w + 1) 2]
  simp only [triangle]
  rw [show (w + 1) * ((w + 1) + 1) = (w + 1) * (w + 2) from rfl, hex]
  exact Nat.add_mul_div_left _ _ (by decide : 0 < 2)

theorem exists_triangle_bucket (k : ℕ) :
    ∃ w, triangle w ≤ k ∧ k < triangle (w + 1) := by
```

```
  let P := fun w : ℕ => k < triangle (w + 1)
  have hP : ∃ w, P w := ⟨k, by
    change k < triangle (k + 1)
    rw [triangle_succ]
    exact lt_of_lt_of_le (Nat.lt_succ_self k) (Nat.le_add_left (k + 1) _)⟩
  let w := Nat.find hP
  refine ⟨w, ?_, Nat.find_spec hP⟩
  cases hw : w with
  | zero => exact Nat.zero_le k
  | succ w' =>
    have hmin : ¬ P w' :=
      Nat.find_min hP (Nat.lt_of_succ_le (by
        have : w = Nat.find hP := rfl
        rw [← this, hw]))
    exact Nat.le_of_not_gt hmin

theorem exists_pair (k : ℕ) : ∃ n m, pair n m = k := by
  obtain ⟨w, hle, hlt⟩ := exists_triangle_bucket k
  refine ⟨w - (k - triangle w), k - triangle w, ?_⟩
  have hlt' : k < triangle w + w + 1 := by
    have : k < triangle w + (w + 1) := by rwa [triangle_succ] at hlt
    exact Nat.add_assoc (triangle w) w 1 ▶ this
  have hk : k ≤ triangle w + w := Nat.lt_succ_iff.mp hlt'
  have hm : k - triangle w ≤ w :=
    Nat.le_of_add_le_add_left ((Nat.add_sub_of_le hle).symm ▶ hk)
  have : w - (k - triangle w) + (k - triangle w) = w := Nat.sub_add_cancel hm
  rw [pair_eq_triangle, this, Nat.add_sub_of_le hle]

noncomputable def unpair (k : ℕ) : ℕ × ℕ :=
  ((exists_pair k).choose, (exists_pair k).choose_spec.choose)

theorem pair_le_left (n m : ℕ) : n ≤ pair n m := by
  have htri : n ≤ triangle (n + m) := by
    cases n with
    | zero => exact Nat.zero_le _
    | succ n =>
      have hmul : n.succ * 2 ≤ (n.succ + m) * (n.succ + m + 1) :=
        Nat.mul_le_mul
          (Nat.le_add_right n.succ m)
          (Nat.succ_le_succ
            (Nat.le_trans (Nat.succ_le_succ (Nat.zero_le n)) (Nat.le_add_right n.succ
   m)))
      exact (Nat.le_div_iff_mul_le (by decide : 0 < 2)).mpr hmul
  exact htri.trans (Nat.le_add_right _ _)

theorem pair_lt_left (n m : ℕ) : n < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_left n m)

theorem pair_le_right (n m : ℕ) : m ≤ pair n m :=
  Nat.le_add_left _ _

theorem pair_lt_right (n m : ℕ) : m < pair n m + 1 :=
  Nat.lt_succ_of_le (pair_le_right n m)

theorem pair_unpair (k : ℕ) : pair (unpair k).1 (unpair k).2 = k :=
  (exists_pair k).choose_spec.choose_spec
```

```
theorem triangle_le_of_le {a b : ℕ} (h : a ≤ b) : triangle a ≤ triangle b := by
  induction h with
  | refl => exact le_rfl
  | step h ih =>
    rw [triangle_succ]
    exact le_trans ih (Nat.le_add_right _ _)

theorem triangle_le_pair (n m : ℕ) :
    triangle (n + m) ≤ pair n m ∧ pair n m < triangle (n + m + 1) := by
  constructor
  · exact Nat.le_add_right _ _
  · rw [triangle_succ]
    exact Nat.add_lt_add_left (Nat.lt_succ_of_le (Nat.le_add_left m n)) _

theorem triangle_lt_of_lt {a b : ℕ} (h : a < b) : triangle a < triangle b := by
  have : a + 1 ≤ b := Nat.succ_le_of_lt h
  calc
    triangle a < triangle a + (a + 1) := Nat.lt_add_of_pos_right (Nat.succ_pos _)
    _ = triangle (a + 1) := (triangle_succ a).symm
    _ ≤ triangle b := triangle_le_of_le this

theorem pair_inj {n₁ m₁ n₂ m₂ : ℕ} (h : pair n₁ m₁ = pair n₂ m₂) :
    n₁ = n₂ ∧ m₁ = m₂ := by
  have h1 := triangle_le_pair n₁ m₁
  have h2 := triangle_le_pair n₂ m₂
  have hw : n₁ + m₁ = n₂ + m₂ := by
    rcases lt_trichotomy (n₁ + m₁) (n₂ + m₂) with hlt | heq | hgt
    · have hle : triangle (n₁ + m₁ + 1) ≤ triangle (n₂ + m₂) :=
        triangle_le_of_le (Nat.succ_le_of_lt hlt)
      have : pair n₁ m₁ < pair n₁ m₁ :=
        calc
          pair n₁ m₁ < triangle (n₁ + m₁ + 1) := h1.2
          _ ≤ triangle (n₂ + m₂) := hle
          _ ≤ pair n₂ m₂ := h2.1
          _ = pair n₁ m₁ := h.symm
      exact (lt_irrefl _ this).elim
    · exact heq
    · have hle : triangle (n₂ + m₂ + 1) ≤ triangle (n₁ + m₁) :=
        triangle_le_of_le (Nat.succ_le_of_lt hgt)
      have : pair n₂ m₂ < pair n₂ m₂ :=
        calc
          pair n₂ m₂ < triangle (n₂ + m₂ + 1) := h2.2
          _ ≤ triangle (n₁ + m₁) := hle
          _ ≤ pair n₁ m₁ := h1.1
          _ = pair n₂ m₂ := h
      exact (lt_irrefl _ this).elim
  have hm : m₁ = m₂ := by
    have : triangle (n₁ + m₁) + m₁ = triangle (n₂ + m₂) + m₂ := h
    rw [hw] at this
    exact Nat.add_left_cancel this
  have hn : n₁ = n₂ := Nat.add_right_cancel (hw.trans (by rw [hm]))
  exact ⟨hn, hm⟩

theorem unpair_pair (n m : ℕ) : unpair (pair n m) = (n, m) := by
  have h := pair_unpair (pair n m)
```

```
  exact Prod.ext (pair_inj h).1 (pair_inj h).2

end DomainTheory.DataTypesAsLattices
```

9

basicNhhd.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.BooleanAlgebra
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def basicNhhd (n : ℕ) : Set Pomega := {x | e n ⊆ x}

namespace basicNhhd

theorem inter (n m : ℕ) :
    basicNhhd n ∩ basicNhhd m = basicNhhd (n ||| m) := by
  ext x
  simp [basicNhhd, e.or, Set.union_subset_iff]

theorem zero : basicNhhd 0 = Set.univ := by
  ext x
  simp [basicNhhd, e.zero]

theorem mono {n m : ℕ} (h : e n ⊆ e m) : basicNhhd m ⊆ basicNhhd n := by
  intro x hx
  exact h.trans hx

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

0

basicNhhd.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.BooleanAlgebra
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
def basicNhhd (n : ℕ) : Set Pomega := {x | e n ⊆ x}

namespace basicNhhd

theorem inter (n m : ℕ) :
    basicNhhd n ∩ basicNhhd m = basicNhhd (n ||| m) := by
  ext x
  simp [basicNhhd, e.or, Set.union_subset_iff]

theorem zero : basicNhhd 0 = Set.univ := by
  ext x
  simp [basicNhhd, e.zero]

theorem mono {n m : ℕ} (h : e n ⊆ e m) : basicNhhd m ⊆ basicNhhd n := by
  intro x hx
  exact h.trans hx

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

1

basicNhhd.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.BooleanAlgebra
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def basicNhhd (n : ℕ) : Set Pomega := {x | e n ⊆ x}

namespace basicNhhd

theorem inter (n m : ℕ) :
    basicNhhd n ∩ basicNhhd m = basicNhhd (n ||| m) := by
  ext x
  simp [basicNhhd, e.or, Set.union_subset_iff]

theorem zero : basicNhhd 0 = Set.univ := by
  ext x
  simp [basicNhhd, e.zero]

theorem mono {n m : ℕ} (h : e n ⊆ e m) : basicNhhd m ⊆ basicNhhd n := by
  intro x hx
  exact h.trans hx

end basicNhhd
```

```
end DomainTheory.DataTypesAsLattices
```

2

basicNhhd.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.BooleanAlgebra
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def basicNhhd (n : ℕ) : Set Pomega := {x | e n ⊆ x}

namespace basicNhhd

theorem inter (n m : ℕ) :
    basicNhhd n ∩ basicNhhd m = basicNhhd (n ||| m) := by
  ext x
  simp [basicNhhd, e.or, Set.union_subset_iff]

theorem zero : basicNhhd 0 = Set.univ := by
  ext x
  simp [basicNhhd, e.zero]

theorem mono {n m : ℕ} (h : e n ⊆ e m) : basicNhhd m ⊆ basicNhhd n := by
  intro x hx
  exact h.trans hx

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

3

basicNhhd.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.BooleanAlgebra
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
def basicNhhd (n : ℕ) : Set Pomega := {x | e n ⊆ x}

namespace basicNhhd

theorem inter (n m : ℕ) :
    basicNhhd n ∩ basicNhhd m = basicNhhd (n ||| m) := by
  ext x
  simp [basicNhhd, e.or, Set.union_subset_iff]

theorem zero : basicNhhd 0 = Set.univ := by
  ext x
  simp [basicNhhd, e.zero]

theorem mono {n m : ℕ} (h : e n ⊆ e m) : basicNhhd m ⊆ basicNhhd n := by
  intro x hx
  exact h.trans hx

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

4

basicNhhd.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.BooleanAlgebra
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def basicNhhd (n : ℕ) : Set Pomega := {x | e n ⊆ x}

namespace basicNhhd

theorem inter (n m : ℕ) :
    basicNhhd n ∩ basicNhhd m = basicNhhd (n ||| m) := by
  ext x
  simp [basicNhhd, e.or, Set.union_subset_iff]

theorem zero : basicNhhd 0 = Set.univ := by
  ext x
  simp [basicNhhd, e.zero]

theorem mono {n m : ℕ} (h : e n ⊆ e m) : basicNhhd m ⊆ basicNhhd n := by
  intro x hx
  exact h.trans hx

end basicNhhd
```

```
end DomainTheory.DataTypesAsLattices
```

5

basicNhhd.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.BooleanAlgebra
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def basicNhhd (n : ℕ) : Set Pomega := {x | e n ⊆ x}

namespace basicNhhd

theorem inter (n m : ℕ) :
    basicNhhd n ∩ basicNhhd m = basicNhhd (n ||| m) := by
  ext x
  simp [basicNhhd, e.or, Set.union_subset_iff]

theorem zero : basicNhhd 0 = Set.univ := by
  ext x
  simp [basicNhhd, e.zero]

theorem mono {n m : ℕ} (h : e n ⊆ e m) : basicNhhd m ⊆ basicNhhd n := by
  intro x hx
  exact h.trans hx

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

6

basicNhhd.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.BooleanAlgebra
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def basicNhhd (n : ℕ) : Set Pomega := {x | e n ⊆ x}
```

```
namespace basicNhhd

theorem inter (n m : ℕ) :
    basicNhhd n ∩ basicNhhd m = basicNhhd (n ||| m) := by
  ext x
  simp [basicNhhd, e.or, Set.union_subset_iff]

theorem zero : basicNhhd 0 = Set.univ := by
  ext x
  simp [basicNhhd, e.zero]

theorem mono {n m : ℕ} (h : e n ⊆ e m) : basicNhhd m ⊆ basicNhhd n := by
  intro x hx
  exact h.trans hx

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

7

basicNhhd.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.BooleanAlgebra
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def basicNhhd (n : ℕ) : Set Pomega := {x | e n ⊆ x}

namespace basicNhhd

theorem inter (n m : ℕ) :
    basicNhhd n ∩ basicNhhd m = basicNhhd (n ||| m) := by
  ext x
  simp [basicNhhd, e.or, Set.union_subset_iff]

theorem zero : basicNhhd 0 = Set.univ := by
  ext x
  simp [basicNhhd, e.zero]

theorem mono {n m : ℕ} (h : e n ⊆ e m) : basicNhhd m ⊆ basicNhhd n := by
  intro x hx
  exact h.trans hx

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

8

basicNhhd.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.BooleanAlgebra
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def basicNhhd (n : ℕ) : Set Pomega := {x | e n ⊆ x}

namespace basicNhhd

theorem inter (n m : ℕ) :
    basicNhhd n ∩ basicNhhd m = basicNhhd (n ||| m) := by
  ext x
  simp [basicNhhd, e.or, Set.union_subset_iff]

theorem zero : basicNhhd 0 = Set.univ := by
  ext x
  simp [basicNhhd, e.zero]

theorem mono {n m : ℕ} (h : e n ⊆ e m) : basicNhhd m ⊆ basicNhhd n := by
  intro x hx
  exact h.trans hx

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

9

scottPiece.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottPiece (f : Pomega → Pomega) (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ f (e n)}

end DomainTheory.DataTypesAsLattices
```

0

scottPiece.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottPiece (f : Pomega → Pomega) (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ f (e n)}

end DomainTheory.DataTypesAsLattices
```

1

scottPiece.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottPiece (f : Pomega → Pomega) (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ f (e n)}

end DomainTheory.DataTypesAsLattices
```

2

scottPiece.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section
```

```
namespace DomainTheory.DataTypesAsLattices

def scottPiece (f : Pomega → Pomega) (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ f (e n)}

end DomainTheory.DataTypesAsLattices
```

3

scottPiece.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottPiece (f : Pomega → Pomega) (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ f (e n)}

end DomainTheory.DataTypesAsLattices
```

4

scottPiece.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottPiece (f : Pomega → Pomega) (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ f (e n)}

end DomainTheory.DataTypesAsLattices
```

5

scottPiece.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
```

```
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottPiece (f : Pomega → Pomega) (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ f (e n)}

end DomainTheory.DataTypesAsLattices
```

6

scottPiece.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottPiece (f : Pomega → Pomega) (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ f (e n)}

end DomainTheory.DataTypesAsLattices
```

7

scottPiece.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottPiece (f : Pomega → Pomega) (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ f (e n)}

end DomainTheory.DataTypesAsLattices
```

8

scottPiece.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottPiece (f : Pomega → Pomega) (x : Pomega) (n : ℕ) : Pomega :=
  {k | e n ⊆ x ∧ k ∈ f (e n)}

end DomainTheory.DataTypesAsLattices
```

9

scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottPiece
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottUnion (f : Pomega → Pomega) (x : Pomega) : Pomega :=
  ⋃ n, scottPiece f x n

end DomainTheory.DataTypesAsLattices
```

0

scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottPiece
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike
```

```
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottUnion (f : Pomega → Pomega) (x : Pomega) : Pomega :=
  ⋃ n, scottPiece f x n

end DomainTheory.DataTypesAsLattices
```

1

scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottPiece
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottUnion (f : Pomega → Pomega) (x : Pomega) : Pomega :=
  ⋃ n, scottPiece f x n

end DomainTheory.DataTypesAsLattices
```

2

scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottPiece
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottUnion (f : Pomega → Pomega) (x : Pomega) : Pomega :=
  ⋃ n, scottPiece f x n

end DomainTheory.DataTypesAsLattices
```

3

scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottPiece
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottUnion (f : Pomega → Pomega) (x : Pomega) : Pomega :=
  ⋃ n, scottPiece f x n

end DomainTheory.DataTypesAsLattices
```

4

scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottPiece
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottUnion (f : Pomega → Pomega) (x : Pomega) : Pomega :=
  ⋃ n, scottPiece f x n

end DomainTheory.DataTypesAsLattices
```

5

scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottPiece
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
def scottUnion (f : Pomega → Pomega) (x : Pomega) : Pomega :=
  ⋃ n, scottPiece f x n

end DomainTheory.DataTypesAsLattices
```

6

scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottPiece
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottUnion (f : Pomega → Pomega) (x : Pomega) : Pomega :=
  ⋃ n, scottPiece f x n

end DomainTheory.DataTypesAsLattices
```

7

scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottPiece
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottUnion (f : Pomega → Pomega) (x : Pomega) : Pomega :=
  ⋃ n, scottPiece f x n

end DomainTheory.DataTypesAsLattices
```

8

scottUnion.lean

```
module
```

```
public import DomainTheory.DataTypesAsLattices.Continuous.scottPiece
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def scottUnion (f : Pomega → Pomega) (x : Pomega) : Pomega :=
  ⋃ n, scottPiece f x n

end DomainTheory.DataTypesAsLattices
```

9

mem_scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem mem_scottUnion {f : Pomega → Pomega} {x : Pomega} {k : ℕ} :
    k ∈ scottUnion f x ↔ ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
  constructor
  · intro hk
    obtain ⟨n, hn, hfk⟩ := Set.mem_iUnion.mp hk
    exact ⟨n, hn, hfk⟩
  · intro ⟨n, hn, hk⟩
    exact Set.mem_iUnion.mpr ⟨n, hn, hk⟩

end DomainTheory.DataTypesAsLattices
```

0

mem_scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section
```

```
namespace DomainTheory.DataTypesAsLattices

theorem mem_scottUnion {f : Pomega → Pomega} {x : Pomega} {k : ℕ} :
    k ∈ scottUnion f x ↔ ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
  constructor
  · intro hk
    obtain ⟨n, hn, hfk⟩ := Set.mem_iUnion.mp hk
    exact ⟨n, hn, hfk⟩
  · intro ⟨n, hn, hk⟩
    exact Set.mem_iUnion.mpr ⟨n, hn, hk⟩

end DomainTheory.DataTypesAsLattices
```

1

mem_scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem mem_scottUnion {f : Pomega → Pomega} {x : Pomega} {k : ℕ} :
    k ∈ scottUnion f x ↔ ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
  constructor
  · intro hk
    obtain ⟨n, hn, hfk⟩ := Set.mem_iUnion.mp hk
    exact ⟨n, hn, hfk⟩
  · intro ⟨n, hn, hk⟩
    exact Set.mem_iUnion.mpr ⟨n, hn, hk⟩

end DomainTheory.DataTypesAsLattices
```

2

mem_scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
theorem mem_scottUnion {f : Pomega → Pomega} {x : Pomega} {k : ℕ} :
    k ∈ scottUnion f x ↔ ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
  constructor
  · intro hk
    obtain ⟨n, hn, hfk⟩ := Set.mem_iUnion.mp hk
    exact ⟨n, hn, hfk⟩
  · intro ⟨n, hn, hk⟩
    exact Set.mem_iUnion.mpr ⟨n, hn, hk⟩

end DomainTheory.DataTypesAsLattices
```

3

mem_scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem mem_scottUnion {f : Pomega → Pomega} {x : Pomega} {k : ℕ} :
    k ∈ scottUnion f x ↔ ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
  constructor
  · intro hk
    obtain ⟨n, hn, hfk⟩ := Set.mem_iUnion.mp hk
    exact ⟨n, hn, hfk⟩
  · intro ⟨n, hn, hk⟩
    exact Set.mem_iUnion.mpr ⟨n, hn, hk⟩

end DomainTheory.DataTypesAsLattices
```

4

mem_scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem mem_scottUnion {f : Pomega → Pomega} {x : Pomega} {k : ℕ} :
```

```
    k ∈ scottUnion f x ↔ ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
  constructor
  · intro hk
    obtain ⟨n, hn, hfk⟩ := Set.mem_iUnion.mp hk
    exact ⟨n, hn, hfk⟩
  · intro ⟨n, hn, hk⟩
    exact Set.mem_iUnion.mpr ⟨n, hn, hk⟩

end DomainTheory.DataTypesAsLattices
```

5

mem_scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem mem_scottUnion {f : Pomega → Pomega} {x : Pomega} {k : ℕ} :
    k ∈ scottUnion f x ↔ ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
  constructor
  · intro hk
    obtain ⟨n, hn, hfk⟩ := Set.mem_iUnion.mp hk
    exact ⟨n, hn, hfk⟩
  · intro ⟨n, hn, hk⟩
    exact Set.mem_iUnion.mpr ⟨n, hn, hk⟩

end DomainTheory.DataTypesAsLattices
```

6

mem_scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem mem_scottUnion {f : Pomega → Pomega} {x : Pomega} {k : ℕ} :
    k ∈ scottUnion f x ↔ ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
  constructor
```

```
  · intro hk
    obtain ⟨n, hn, hfk⟩ := Set.mem_iUnion.mp hk
    exact ⟨n, hn, hfk⟩
  · intro ⟨n, hn, hk⟩
    exact Set.mem_iUnion.mpr ⟨n, hn, hk⟩

end DomainTheory.DataTypesAsLattices
```

7

mem_scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem mem_scottUnion {f : Pomega → Pomega} {x : Pomega} {k : ℕ} :
    k ∈ scottUnion f x ↔ ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
  constructor
  · intro hk
    obtain ⟨n, hn, hfk⟩ := Set.mem_iUnion.mp hk
    exact ⟨n, hn, hfk⟩
  · intro ⟨n, hn, hk⟩
    exact Set.mem_iUnion.mpr ⟨n, hn, hk⟩

end DomainTheory.DataTypesAsLattices
```

8

mem_scottUnion.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem mem_scottUnion {f : Pomega → Pomega} {x : Pomega} {k : ℕ} :
    k ∈ scottUnion f x ↔ ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
  constructor
  · intro hk
    obtain ⟨n, hn, hfk⟩ := Set.mem_iUnion.mp hk
```

```
    exact ⟨n, hn, hfk⟩
  · intro ⟨n, hn, hk⟩
    exact Set.mem_iUnion.mpr ⟨n, hn, hk⟩

end DomainTheory.DataTypesAsLattices
```

9

IsScottOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def IsScottOpen (U : Set Pomega) : Prop :=
  ∃ B : Set ℕ, U = ⋃ n ∈ B, basicNhhd n

end DomainTheory.DataTypesAsLattices
```

0

IsScottOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def IsScottOpen (U : Set Pomega) : Prop :=
  ∃ B : Set ℕ, U = ⋃ n ∈ B, basicNhhd n

end DomainTheory.DataTypesAsLattices
```

1

IsScottOpen.lean

```
module
```

```
public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def IsScottOpen (U : Set Pomega) : Prop :=
  ∃ B : Set ℕ, U = ⋃ n ∈ B, basicNhhd n

end DomainTheory.DataTypesAsLattices
```

2

IsScottOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def IsScottOpen (U : Set Pomega) : Prop :=
  ∃ B : Set ℕ, U = ⋃ n ∈ B, basicNhhd n

end DomainTheory.DataTypesAsLattices
```

3

IsScottOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def IsScottOpen (U : Set Pomega) : Prop :=
```

```
  ∃ B : Set ℕ, U = ⋃ n ∈ B, basicNhhd n

end DomainTheory.DataTypesAsLattices
```

4

IsScottOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def IsScottOpen (U : Set Pomega) : Prop :=
  ∃ B : Set ℕ, U = ⋃ n ∈ B, basicNhhd n

end DomainTheory.DataTypesAsLattices
```

5

IsScottOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def IsScottOpen (U : Set Pomega) : Prop :=
  ∃ B : Set ℕ, U = ⋃ n ∈ B, basicNhhd n

end DomainTheory.DataTypesAsLattices
```

6

IsScottOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
public import Mathlib.Order.SetNotation
```

```
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def IsScottOpen (U : Set Pomega) : Prop :=
  ∃ B : Set ℕ, U = ⋃ n ∈ B, basicNhhd n

end DomainTheory.DataTypesAsLattices
```

7

IsScottOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def IsScottOpen (U : Set Pomega) : Prop :=
  ∃ B : Set ℕ, U = ⋃ n ∈ B, basicNhhd n

end DomainTheory.DataTypesAsLattices
```

8

IsScottOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def IsScottOpen (U : Set Pomega) : Prop :=
  ∃ B : Set ℕ, U = ⋃ n ∈ B, basicNhhd n
```

```
end DomainTheory.DataTypesAsLattices
```

9

IsScottOpen_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

namespace IsScottOpen

theorem univ : IsScottOpen (Set.univ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_univ

theorem empty : IsScottOpen (∅ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_empty

theorem union {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∪ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).union ((isScottOpen_iff_isOpen _).mp hV))

theorem inter {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∩ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).inter ((isScottOpen_iff_isOpen _).mp hV))

theorem iUnion {ι : Type*} (U : ι → Set Pomega) (hU : ∀ i, IsScottOpen (U i)) :
    IsScottOpen (⋃ i, U i) :=
  (isScottOpen_iff_isOpen _).mpr (isOpen_iUnion fun i => (isScottOpen_iff_isOpen _).mp
    (hU i))

theorem mem_iff {U : Set Pomega} (hU : IsScottOpen U) {x : Pomega} :
    x ∈ U ↔ ∃ n, e n ⊆ x ∧ e n ∈ U := by
  constructor
  · intro hx
    obtain ⟨B, rfl⟩ := hU
    obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
    exact ⟨n, hxn, Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩⟩
  · intro ⟨n, hn, hne⟩
    exact isScottOpen_isUpper hU hne hn

end IsScottOpen
```

```
end DomainTheory.DataTypesAsLattices
```

0

IsScottOpen_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

namespace IsScottOpen

theorem univ : IsScottOpen (Set.univ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_univ

theorem empty : IsScottOpen (∅ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_empty

theorem union {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∪ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).union ((isScottOpen_iff_isOpen _).mp hV))

theorem inter {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∩ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).inter ((isScottOpen_iff_isOpen _).mp hV))

theorem iUnion {ι : Type*} (U : ι → Set Pomega) (hU : ∀ i, IsScottOpen (U i)) :
    IsScottOpen (⋃ i, U i) :=
  (isScottOpen_iff_isOpen _).mpr (isOpen_iUnion fun i => (isScottOpen_iff_isOpen _).mp
    (hU i))

theorem mem_iff {U : Set Pomega} (hU : IsScottOpen U) {x : Pomega} :
    x ∈ U ↔ ∃ n, e n ⊆ x ∧ e n ∈ U := by
  constructor
  · intro hx
    obtain ⟨B, rfl⟩ := hU
    obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
    exact ⟨n, hxn, Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩⟩
  · intro ⟨n, hn, hne⟩
    exact isScottOpen_isUpper hU hne hn

end IsScottOpen
```

```
end DomainTheory.DataTypesAsLattices
```

1

IsScottOpen_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

namespace IsScottOpen

theorem univ : IsScottOpen (Set.univ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_univ

theorem empty : IsScottOpen (∅ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_empty

theorem union {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∪ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).union ((isScottOpen_iff_isOpen _).mp hV))

theorem inter {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∩ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).inter ((isScottOpen_iff_isOpen _).mp hV))

theorem iUnion {ι : Type*} (U : ι → Set Pomega) (hU : ∀ i, IsScottOpen (U i)) :
    IsScottOpen (⋃ i, U i) :=
  (isScottOpen_iff_isOpen _).mpr (isOpen_iUnion fun i => (isScottOpen_iff_isOpen _).mp
    (hU i))

theorem mem_iff {U : Set Pomega} (hU : IsScottOpen U) {x : Pomega} :
    x ∈ U ↔ ∃ n, e n ⊆ x ∧ e n ∈ U := by
  constructor
  · intro hx
    obtain ⟨B, rfl⟩ := hU
    obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
    exact ⟨n, hxn, Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩⟩
  · intro ⟨n, hn, hne⟩
    exact isScottOpen_isUpper hU hne hn

end IsScottOpen
```

```
end DomainTheory.DataTypesAsLattices
```

2

IsScottOpen_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

namespace IsScottOpen

theorem univ : IsScottOpen (Set.univ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_univ

theorem empty : IsScottOpen (∅ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_empty

theorem union {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∪ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).union ((isScottOpen_iff_isOpen _).mp hV))

theorem inter {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∩ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).inter ((isScottOpen_iff_isOpen _).mp hV))

theorem iUnion {ι : Type*} (U : ι → Set Pomega) (hU : ∀ i, IsScottOpen (U i)) :
    IsScottOpen (⋃ i, U i) :=
  (isScottOpen_iff_isOpen _).mpr (isOpen_iUnion fun i => (isScottOpen_iff_isOpen _).mp
    (hU i))

theorem mem_iff {U : Set Pomega} (hU : IsScottOpen U) {x : Pomega} :
    x ∈ U ↔ ∃ n, e n ⊆ x ∧ e n ∈ U := by
  constructor
  · intro hx
    obtain ⟨B, rfl⟩ := hU
    obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
    exact ⟨n, hxn, Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩⟩
  · intro ⟨n, hn, hne⟩
    exact isScottOpen_isUpper hU hne hn

end IsScottOpen
```

```
end DomainTheory.DataTypesAsLattices
```

3

IsScottOpen_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

namespace IsScottOpen

theorem univ : IsScottOpen (Set.univ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_univ

theorem empty : IsScottOpen (∅ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_empty

theorem union {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∪ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).union ((isScottOpen_iff_isOpen _).mp hV))

theorem inter {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∩ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).inter ((isScottOpen_iff_isOpen _).mp hV))

theorem iUnion {ι : Type*} (U : ι → Set Pomega) (hU : ∀ i, IsScottOpen (U i)) :
    IsScottOpen (⋃ i, U i) :=
  (isScottOpen_iff_isOpen _).mpr (isOpen_iUnion fun i => (isScottOpen_iff_isOpen _).mp
    (hU i))

theorem mem_iff {U : Set Pomega} (hU : IsScottOpen U) {x : Pomega} :
    x ∈ U ↔ ∃ n, e n ⊆ x ∧ e n ∈ U := by
  constructor
  · intro hx
    obtain ⟨B, rfl⟩ := hU
    obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
    exact ⟨n, hxn, Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩⟩
  · intro ⟨n, hn, hne⟩
    exact isScottOpen_isUpper hU hne hn

end IsScottOpen
```

```
end DomainTheory.DataTypesAsLattices
```

4

IsScottOpen_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

namespace IsScottOpen

theorem univ : IsScottOpen (Set.univ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_univ

theorem empty : IsScottOpen (∅ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_empty

theorem union {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∪ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).union ((isScottOpen_iff_isOpen _).mp hV))

theorem inter {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∩ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).inter ((isScottOpen_iff_isOpen _).mp hV))

theorem iUnion {ι : Type*} (U : ι → Set Pomega) (hU : ∀ i, IsScottOpen (U i)) :
    IsScottOpen (⋃ i, U i) :=
  (isScottOpen_iff_isOpen _).mpr (isOpen_iUnion fun i => (isScottOpen_iff_isOpen _).mp
    (hU i))

theorem mem_iff {U : Set Pomega} (hU : IsScottOpen U) {x : Pomega} :
    x ∈ U ↔ ∃ n, e n ⊆ x ∧ e n ∈ U := by
  constructor
  · intro hx
    obtain ⟨B, rfl⟩ := hU
    obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
    exact ⟨n, hxn, Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩⟩
  · intro ⟨n, hn, hne⟩
    exact isScottOpen_isUpper hU hne hn

end IsScottOpen
```

```
end DomainTheory.DataTypesAsLattices
```

5

IsScottOpen_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

namespace IsScottOpen

theorem univ : IsScottOpen (Set.univ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_univ

theorem empty : IsScottOpen (∅ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_empty

theorem union {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∪ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).union ((isScottOpen_iff_isOpen _).mp hV))

theorem inter {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∩ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).inter ((isScottOpen_iff_isOpen _).mp hV))

theorem iUnion {ι : Type*} (U : ι → Set Pomega) (hU : ∀ i, IsScottOpen (U i)) :
    IsScottOpen (⋃ i, U i) :=
  (isScottOpen_iff_isOpen _).mpr (isOpen_iUnion fun i => (isScottOpen_iff_isOpen _).mp
    (hU i))

theorem mem_iff {U : Set Pomega} (hU : IsScottOpen U) {x : Pomega} :
    x ∈ U ↔ ∃ n, e n ⊆ x ∧ e n ∈ U := by
  constructor
  · intro hx
    obtain ⟨B, rfl⟩ := hU
    obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
    exact ⟨n, hxn, Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩⟩
  · intro ⟨n, hn, hne⟩
    exact isScottOpen_isUpper hU hne hn

end IsScottOpen
```

```
end DomainTheory.DataTypesAsLattices
```

6

IsScottOpen_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

namespace IsScottOpen

theorem univ : IsScottOpen (Set.univ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_univ

theorem empty : IsScottOpen (∅ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_empty

theorem union {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∪ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).union ((isScottOpen_iff_isOpen _).mp hV))

theorem inter {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∩ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).inter ((isScottOpen_iff_isOpen _).mp hV))

theorem iUnion {ι : Type*} (U : ι → Set Pomega) (hU : ∀ i, IsScottOpen (U i)) :
    IsScottOpen (⋃ i, U i) :=
  (isScottOpen_iff_isOpen _).mpr (isOpen_iUnion fun i => (isScottOpen_iff_isOpen _).mp
    (hU i))

theorem mem_iff {U : Set Pomega} (hU : IsScottOpen U) {x : Pomega} :
    x ∈ U ↔ ∃ n, e n ⊆ x ∧ e n ∈ U := by
  constructor
  · intro hx
    obtain ⟨B, rfl⟩ := hU
    obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
    exact ⟨n, hxn, Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩⟩
  · intro ⟨n, hn, hne⟩
    exact isScottOpen_isUpper hU hne hn

end IsScottOpen
```

```
end DomainTheory.DataTypesAsLattices
```

7

IsScottOpen_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

namespace IsScottOpen

theorem univ : IsScottOpen (Set.univ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_univ

theorem empty : IsScottOpen (∅ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_empty

theorem union {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∪ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).union ((isScottOpen_iff_isOpen _).mp hV))

theorem inter {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∩ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).inter ((isScottOpen_iff_isOpen _).mp hV))

theorem iUnion {ι : Type*} (U : ι → Set Pomega) (hU : ∀ i, IsScottOpen (U i)) :
    IsScottOpen (⋃ i, U i) :=
  (isScottOpen_iff_isOpen _).mpr (isOpen_iUnion fun i => (isScottOpen_iff_isOpen _).mp
    (hU i))

theorem mem_iff {U : Set Pomega} (hU : IsScottOpen U) {x : Pomega} :
    x ∈ U ↔ ∃ n, e n ⊆ x ∧ e n ∈ U := by
  constructor
  · intro hx
    obtain ⟨B, rfl⟩ := hU
    obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
    exact ⟨n, hxn, Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩⟩
  · intro ⟨n, hn, hne⟩
    exact isScottOpen_isUpper hU hne hn

end IsScottOpen
```

```
end DomainTheory.DataTypesAsLattices
```

8

IsScottOpen_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
public import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

namespace IsScottOpen

theorem univ : IsScottOpen (Set.univ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_univ

theorem empty : IsScottOpen (∅ : Set Pomega) :=
  (isScottOpen_iff_isOpen _).mpr isOpen_empty

theorem union {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∪ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).union ((isScottOpen_iff_isOpen _).mp hV))

theorem inter {U V : Set Pomega} (hU : IsScottOpen U) (hV : IsScottOpen V) :
    IsScottOpen (U ∩ V) :=
  (isScottOpen_iff_isOpen _).mpr
    (((isScottOpen_iff_isOpen _).mp hU).inter ((isScottOpen_iff_isOpen _).mp hV))

theorem iUnion {ι : Type*} (U : ι → Set Pomega) (hU : ∀ i, IsScottOpen (U i)) :
    IsScottOpen (⋃ i, U i) :=
  (isScottOpen_iff_isOpen _).mpr (isOpen_iUnion fun i => (isScottOpen_iff_isOpen _).mp
    (hU i))

theorem mem_iff {U : Set Pomega} (hU : IsScottOpen U) {x : Pomega} :
    x ∈ U ↔ ∃ n, e n ⊆ x ∧ e n ∈ U := by
  constructor
  · intro hx
    obtain ⟨B, rfl⟩ := hU
    obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
    exact ⟨n, hxn, Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩⟩
  · intro ⟨n, hn, hne⟩
    exact isScottOpen_isUpper hU hne hn

end IsScottOpen
```

```
end DomainTheory.DataTypesAsLattices
```

9

IsScottContinuous.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.Continuous.isOpen_memOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import Mathlib.Tactic.Bound.Init
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

class IsScottContinuous (f : Pomega → Pomega) : Prop where
  out : ∀ x, f x = scottUnion f x

namespace IsScottContinuous

theorem monotone {f : Pomega → Pomega}
    (hf : IsScottContinuous f) {x y : Pomega} (h : x ⊆ y) : f x ⊆ f y := by
  intro m hm
  rw [hf.out x, mem_scottUnion] at hm
  rw [hf.out y, mem_scottUnion]
  obtain ⟨n, hn, hmn⟩ := hm
  exact ⟨n, subset_trans hn h, hmn⟩

theorem determined {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g)
    (hfin : ∀ n, f (e n) = g (e n)) : f = g := by
  funext x
  rw [hf.out x, hg.out x]
  simp [scottUnion, scottPiece, hfin]

theorem iff_continuous (f : Pomega → Pomega) :
    IsScottContinuous f ↔ Continuous f := by
  constructor
  · intro hf
    refine continuous_generateFrom_iff.2 ?_
    rintro _ ⟨k, rfl⟩
    rw [← isScottOpen_iff_isOpen]
    refine ⟨{n | k ∈ f (e n)}, ?_⟩
    ext x
    constructor
    · intro hx
      have : k ∈ scottUnion f x := by rwa [← hf.out x]
```

```
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
      exact Set.mem_iUnion₂.mpr ⟨n, hkn, hn⟩
    · intro hx
      obtain ⟨n, hkn, hn⟩ := Set.mem_iUnion₂.mp hx
      exact monotone hf hn hkn
  · intro hfcont
    constructor
    intro x
    ext k
    have hopen : IsScottOpen (f ^-1' memOpen k) :=
      (isScottOpen_iff_isOpen _).mpr (IsOpen.preimage hfcont (isOpen_memOpen k))
    constructor
    · intro hk
      obtain ⟨B, hB⟩ := hopen
      have hx : x ∈ ⋃ n ∈ B, basicNhhd n := by
        have : x ∈ f ^-1' memOpen k := hk
        rwa [hB] at this
      obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
      have hen : k ∈ f (e n) := by
        have : e n ∈ f ^-1' memOpen k := by
          rw [hB]
          exact Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩
        exact this
      exact mem_scottUnion.mpr ⟨n, hxn, hen⟩
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e n ∈ f ^-1' memOpen k := hkn
      exact isScottOpen_isUpper hopen this hn

theorem mem_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f) (k : ℕ) :
    IsScottOpen {x | k ∈ f x} := by
  have : {x | k ∈ f x} = f ^-1' memOpen k := rfl
  rw [this, isScottOpen_iff_isOpen]
  exact IsOpen.preimage ((IsScottContinuous.iff_continuous f).mp hf) (isOpen_memOpen k
    )

theorem not_subset {f : Pomega → Pomega} (hf : IsScottContinuous f)
    (e : Pomega) : IsScottOpen {x | ¬ f x ⊆ e} := by
  have : {x | ¬ f x ⊆ e} = ⋃ k, {x | k ∈ e ∧ k ∈ f x} := by
    ext x
    constructor
    · intro hx
      obtain ⟨k, hk, hke⟩ := Set.not_subset.mp hx
      exact Set.mem_iUnion.mpr ⟨k, ⟨hke, hk⟩⟩
    · intro hx
      obtain ⟨k, hke, hk⟩ := Set.mem_iUnion.mp hx
      intro hsub
      exact hke (hsub hk)
  rw [this]
  exact IsScottOpen.iUnion _ fun k => by
    by_cases hke : k ∈ e
    · have : {x | k ∈ e ∧ k ∈ f x} = (∅ : Set Pomega) := by
        ext x; simp [hke]
      rw [this]; exact IsScottOpen.empty
    · have : {x | k ∈ e ∧ k ∈ f x} = {x | k ∈ f x} := by
        ext x; simp [hke]
```

```
      rw [this]; exact mem_preimage hf k

theorem subset_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) : IsScottOpen {x | e ⊆ f x} := by
  have : {x | e ⊆ f x} = ⋂ k ∈ he.toFinset, {x | k ∈ f x} := by
    ext x
    constructor
    · intro hx
      exact Set.mem_iInter₂.mpr fun k hk => hx (he.mem_toFinset.mp hk)
    · intro hx k hk
      exact Set.mem_iInter₂.mp hx k (he.mem_toFinset.mpr hk)
  rw [this, isScottOpen_iff_isOpen]
  exact isOpen_biInter_finset fun k _ =>
    (isScottOpen_iff_isOpen _).mp (mem_preimage hf k)

theorem ne_eq_open_union_closed {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) :
    {x | f x = e} = {x | ¬ f x ⊆ e} ∪ {x | ¬ e ⊆ f x} ∧
      IsScottOpen {x | ¬ f x ⊆ e} ∧
      IsScottOpen {x | ¬ e ⊆ f x}? := by
  refine ⟨?_, not_subset hf e, ?_⟩
  · ext x
    constructor
    · intro hne
      by_cases hsub : f x ⊆ e
      · refine Or.inr fun hsup => hne (subset_antisymm hsub hsup)
      · exact Or.inl hsub
    · intro h heq
      rcases h with h | h
      · exact h heq.subset
      · exact h heq.symm.subset
  · have : {x | ¬ e ⊆ f x}? = {x | e ⊆ f x} := by
      ext x; simp
    rw [this]
    exact subset_preimage hf he

end IsScottContinuous

end DomainTheory.DataTypesAsLattices
```

0

IsScottContinuous.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.Continuous.isOpen_memOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import Mathlib.Tactic.Bound.Init
import Mathlib.Data.Set.Finite.Basic
```

```
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

class IsScottContinuous (f : Pomega → Pomega) : Prop where
  out : ∀ x, f x = scottUnion f x

namespace IsScottContinuous

theorem monotone {f : Pomega → Pomega}
    (hf : IsScottContinuous f) {x y : Pomega} (h : x ⊆ y) : f x ⊆ f y := by
  intro m hm
  rw [hf.out x, mem_scottUnion] at hm
  rw [hf.out y, mem_scottUnion]
  obtain ⟨n, hn, hmn⟩ := hm
  exact ⟨n, subset_trans hn h, hmn⟩

theorem determined {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g)
    (hfin : ∀ n, f (e n) = g (e n)) : f = g := by
  funext x
  rw [hf.out x, hg.out x]
  simp [scottUnion, scottPiece, hfin]

theorem iff_continuous (f : Pomega → Pomega) :
    IsScottContinuous f ↔ Continuous f := by
  constructor
  · intro hf
    refine continuous_generateFrom_iff.2 ?_
    rintro _ ⟨k, rfl⟩
    rw [← isScottOpen_iff_isOpen]
    refine ⟨{n | k ∈ f (e n)}, ?_⟩
    ext x
    constructor
    · intro hx
      have : k ∈ scottUnion f x := by rwa [← hf.out x]
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
      exact Set.mem_iUnion₂.mpr ⟨n, hkn, hn⟩
    · intro hx
      obtain ⟨n, hkn, hn⟩ := Set.mem_iUnion₂.mp hx
      exact monotone hf hn hkn
  · intro hfcont
    constructor
    intro x
    ext k
    have hopen : IsScottOpen (f ^-1' memOpen k) :=
      (isScottOpen_iff_isOpen _).mpr (IsOpen.preimage hfcont (isOpen_memOpen k))
    constructor
    · intro hk
      obtain ⟨B, hB⟩ := hopen
      have hx : x ∈ ⋃ n ∈ B, basicNhhd n := by
        have : x ∈ f ^-1' memOpen k := hk
        rwa [hB] at this
      obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
```

```
      have hen : k ∈ f (e n) := by
        have : e n ∈ f ^-1' memOpen k := by
          rw [hB]
          exact Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩
        exact this
      exact mem_scottUnion.mpr ⟨n, hxn, hen⟩
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e n ∈ f ^-1' memOpen k := hkn
      exact isScottOpen_isUpper hopen this hn

theorem mem_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f) (k : ℕ) :
    IsScottOpen {x | k ∈ f x} := by
  have : {x | k ∈ f x} = f ^-1' memOpen k := rfl
  rw [this, isScottOpen_iff_isOpen]
  exact IsOpen.preimage ((IsScottContinuous.iff_continuous f).mp hf) (isOpen_memOpen k
    )

theorem not_subset {f : Pomega → Pomega} (hf : IsScottContinuous f)
    (e : Pomega) : IsScottOpen {x | ¬ f x ⊆ e} := by
  have : {x | ¬ f x ⊆ e} = ⋃ k, {x | k ∈ e ∧ k ∈ f x} := by
    ext x
    constructor
    · intro hx
      obtain ⟨k, hk, hke⟩ := Set.not_subset.mp hx
      exact Set.mem_iUnion.mpr ⟨k, ⟨hke, hk⟩⟩
    · intro hx
      obtain ⟨k, hke, hk⟩ := Set.mem_iUnion.mp hx
      intro hsub
      exact hke (hsub hk)
  rw [this]
  exact IsScottOpen.iUnion _ fun k => by
    by_cases hke : k ∈ e
    · have : {x | k ∈ e ∧ k ∈ f x} = (∅ : Set Pomega) := by
        ext x; simp [hke]
      rw [this]; exact IsScottOpen.empty
    · have : {x | k ∈ e ∧ k ∈ f x} = {x | k ∈ f x} := by
        ext x; simp [hke]
      rw [this]; exact mem_preimage hf k

theorem subset_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) : IsScottOpen {x | e ⊆ f x} := by
  have : {x | e ⊆ f x} = ⋂ k ∈ he.toFinset, {x | k ∈ f x} := by
    ext x
    constructor
    · intro hx
      exact Set.mem_iInter₂.mpr fun k hk => hx (he.mem_toFinset.mp hk)
    · intro hx k hk
      exact Set.mem_iInter₂.mp hx k (he.mem_toFinset.mpr hk)
  rw [this, isScottOpen_iff_isOpen]
  exact isOpen_biInter_finset fun k _ =>
    (isScottOpen_iff_isOpen _).mp (mem_preimage hf k)

theorem ne_eq_open_union_closed {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) :
    {x | f x = e} = {x | ¬ f x ⊆ e} ∪ {x | ¬ e ⊆ f x} ∧
```

```
      IsScottOpen {x | ¬ f x ⊆ e} ∧
      IsScottOpen {x | ¬ e ⊆ f x}? := by
  refine ⟨?_, not_subset hf e, ?_⟩
  · ext x
    constructor
    · intro hne
      by_cases hsub : f x ⊆ e
      · refine Or.inr fun hsup => hne (subset_antisymm hsub hsup)
      · exact Or.inl hsub
    · intro h heq
      rcases h with h | h
      · exact h heq.subset
      · exact h heq.symm.subset
  · have : {x | ¬ e ⊆ f x}? = {x | e ⊆ f x} := by
      ext x; simp
    rw [this]
    exact subset_preimage hf he

end IsScottContinuous

end DomainTheory.DataTypesAsLattices
```

1

IsScottContinuous.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.Continuous.isOpen_memOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import Mathlib.Tactic.Bound.Init
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

class IsScottContinuous (f : Pomega → Pomega) : Prop where
  out : ∀ x, f x = scottUnion f x

namespace IsScottContinuous

theorem monotone {f : Pomega → Pomega}
    (hf : IsScottContinuous f) {x y : Pomega} (h : x ⊆ y) : f x ⊆ f y := by
  intro m hm
  rw [hf.out x, mem_scottUnion] at hm
  rw [hf.out y, mem_scottUnion]
  obtain ⟨n, hn, hmn⟩ := hm
  exact ⟨n, subset_trans hn h, hmn⟩
```

```
theorem determined {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g)
    (hfin : ∀ n, f (e n) = g (e n)) : f = g := by
  funext x
  rw [hf.out x, hg.out x]
  simp [scottUnion, scottPiece, hfin]

theorem iff_continuous (f : Pomega → Pomega) :
    IsScottContinuous f ↔ Continuous f := by
  constructor
  · intro hf
    refine continuous_generateFrom_iff.2 ?_
    rintro _ ⟨k, rfl⟩
    rw [← isScottOpen_iff_isOpen]
    refine ⟨{n | k ∈ f (e n)}, ?_⟩
    ext x
    constructor
    · intro hx
      have : k ∈ scottUnion f x := by rwa [← hf.out x]
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
      exact Set.mem_iUnion₂.mpr ⟨n, hkn, hn⟩
    · intro hx
      obtain ⟨n, hkn, hn⟩ := Set.mem_iUnion₂.mp hx
      exact monotone hf hn hkn
  · intro hfcont
    constructor
    intro x
    ext k
    have hopen : IsScottOpen (f ^-1' memOpen k) :=
      (isScottOpen_iff_isOpen _).mpr (IsOpen.preimage hfcont (isOpen_memOpen k))
    constructor
    · intro hk
      obtain ⟨B, hB⟩ := hopen
      have hx : x ∈ ⋃ n ∈ B, basicNhhd n := by
        have : x ∈ f ^-1' memOpen k := hk
        rwa [hB] at this
      obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
      have hen : k ∈ f (e n) := by
        have : e n ∈ f ^-1' memOpen k := by
          rw [hB]
          exact Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩
        exact this
      exact mem_scottUnion.mpr ⟨n, hxn, hen⟩
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e n ∈ f ^-1' memOpen k := hkn
      exact isScottOpen_isUpper hopen this hn

theorem mem_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f) (k : ℕ) :
    IsScottOpen {x | k ∈ f x} := by
  have : {x | k ∈ f x} = f ^-1' memOpen k := rfl
  rw [this, isScottOpen_iff_isOpen]
  exact IsOpen.preimage ((IsScottContinuous.iff_continuous f).mp hf) (isOpen_memOpen k
    )
```

```
theorem not_subset {f : Pomega → Pomega} (hf : IsScottContinuous f)
    (e : Pomega) : IsScottOpen {x | ¬ f x ⊆ e} := by
  have : {x | ¬ f x ⊆ e} = ⋃ k, {x | k ∈ e ∧ k ∈ f x} := by
    ext x
    constructor
    · intro hx
      obtain ⟨k, hk, hke⟩ := Set.not_subset.mp hx
      exact Set.mem_iUnion.mpr ⟨k, ⟨hke, hk⟩⟩
    · intro hx
      obtain ⟨k, hke, hk⟩ := Set.mem_iUnion.mp hx
      intro hsub
      exact hke (hsub hk)
  rw [this]
  exact IsScottOpen.iUnion _ fun k => by
    by_cases hke : k ∈ e
    · have : {x | k ∈ e ∧ k ∈ f x} = (∅ : Set Pomega) := by
        ext x; simp [hke]
      rw [this]; exact IsScottOpen.empty
    · have : {x | k ∈ e ∧ k ∈ f x} = {x | k ∈ f x} := by
        ext x; simp [hke]
      rw [this]; exact mem_preimage hf k

theorem subset_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) : IsScottOpen {x | e ⊆ f x} := by
  have : {x | e ⊆ f x} = ⋂ k ∈ he.toFinset, {x | k ∈ f x} := by
    ext x
    constructor
    · intro hx
      exact Set.mem_iInter₂.mpr fun k hk => hx (he.mem_toFinset.mp hk)
    · intro hx k hk
      exact Set.mem_iInter₂.mp hx k (he.mem_toFinset.mpr hk)
  rw [this, isScottOpen_iff_isOpen]
  exact isOpen_biInter_finset fun k _ =>
    (isScottOpen_iff_isOpen _).mp (mem_preimage hf k)

theorem ne_eq_open_union_closed {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) :
    {x | f x = e} = {x | ¬ f x ⊆ e} ∪ {x | ¬ e ⊆ f x} ∧
      IsScottOpen {x | ¬ f x ⊆ e} ∧
      IsScottOpen {x | ¬ e ⊆ f x}? := by
  refine ⟨?_, not_subset hf e, ?_⟩
  · ext x
    constructor
    · intro hne
      by_cases hsub : f x ⊆ e
      · refine Or.inr fun hsup => hne (subset_antisymm hsub hsup)
      · exact Or.inl hsub
    · intro h heq
      rcases h with h | h
      · exact h heq.subset
      · exact h heq.symm.subset
  · have : {x | ¬ e ⊆ f x}? = {x | e ⊆ f x} := by
      ext x; simp
    rw [this]
    exact subset_preimage hf he
```

```
end IsScottContinuous

end DomainTheory.DataTypesAsLattices
```

2

IsScottContinuous.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.Continuous.isOpen_memOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import Mathlib.Tactic.Bound.Init
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

class IsScottContinuous (f : Pomega → Pomega) : Prop where
  out : ∀ x, f x = scottUnion f x

namespace IsScottContinuous

theorem monotone {f : Pomega → Pomega}
    (hf : IsScottContinuous f) {x y : Pomega} (h : x ⊆ y) : f x ⊆ f y := by
  intro m hm
  rw [hf.out x, mem_scottUnion] at hm
  rw [hf.out y, mem_scottUnion]
  obtain ⟨n, hn, hmn⟩ := hm
  exact ⟨n, subset_trans hn h, hmn⟩

theorem determined {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g)
    (hfin : ∀ n, f (e n) = g (e n)) : f = g := by
  funext x
  rw [hf.out x, hg.out x]
  simp [scottUnion, scottPiece, hfin]

theorem iff_continuous (f : Pomega → Pomega) :
    IsScottContinuous f ↔ Continuous f := by
  constructor
  · intro hf
    refine continuous_generateFrom_iff.2 ?_
    rintro _ ⟨k, rfl⟩
    rw [← isScottOpen_iff_isOpen]
    refine ⟨{n | k ∈ f (e n)}, ?_⟩
    ext x
    constructor
```

```
    · intro hx
      have : k ∈ scottUnion f x := by rwa [← hf.out x]
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
      exact Set.mem_iUnion₂.mpr ⟨n, hkn, hn⟩
    · intro hx
      obtain ⟨n, hkn, hn⟩ := Set.mem_iUnion₂.mp hx
      exact monotone hf hn hkn
  · intro hfcont
    constructor
    intro x
    ext k
    have hopen : IsScottOpen (f ^-1' memOpen k) :=
      (isScottOpen_iff_isOpen _).mpr (IsOpen.preimage hfcont (isOpen_memOpen k))
    constructor
    · intro hk
      obtain ⟨B, hB⟩ := hopen
      have hx : x ∈ ⋃ n ∈ B, basicNhhd n := by
        have : x ∈ f ^-1' memOpen k := hk
        rwa [hB] at this
      obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
      have hen : k ∈ f (e n) := by
        have : e n ∈ f ^-1' memOpen k := by
          rw [hB]
          exact Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩
        exact this
      exact mem_scottUnion.mpr ⟨n, hxn, hen⟩
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e n ∈ f ^-1' memOpen k := hkn
      exact isScottOpen_isUpper hopen this hn

theorem mem_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f) (k : ℕ) :
    IsScottOpen {x | k ∈ f x} := by
  have : {x | k ∈ f x} = f ^-1' memOpen k := rfl
  rw [this, isScottOpen_iff_isOpen]
  exact IsOpen.preimage ((IsScottContinuous.iff_continuous f).mp hf) (isOpen_memOpen k
    )

theorem not_subset {f : Pomega → Pomega} (hf : IsScottContinuous f)
    (e : Pomega) : IsScottOpen {x | ¬ f x ⊆ e} := by
  have : {x | ¬ f x ⊆ e} = ⋃ k, {x | k ∈ e ∧ k ∈ f x} := by
    ext x
    constructor
    · intro hx
      obtain ⟨k, hk, hke⟩ := Set.not_subset.mp hx
      exact Set.mem_iUnion.mpr ⟨k, ⟨hke, hk⟩⟩
    · intro hx
      obtain ⟨k, hke, hk⟩ := Set.mem_iUnion.mp hx
      intro hsub
      exact hke (hsub hk)
  rw [this]
  exact IsScottOpen.iUnion _ fun k => by
    by_cases hke : k ∈ e
    · have : {x | k ∈ e ∧ k ∈ f x} = (∅ : Set Pomega) := by
        ext x; simp [hke]
      rw [this]; exact IsScottOpen.empty
```

```
    · have : {x | k ∈ e ∧ k ∈ f x} = {x | k ∈ f x} := by
        ext x; simp [hke]
      rw [this]; exact mem_preimage hf k

theorem subset_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) : IsScottOpen {x | e ⊆ f x} := by
  have : {x | e ⊆ f x} = ⋂ k ∈ he.toFinset, {x | k ∈ f x} := by
    ext x
    constructor
    · intro hx
      exact Set.mem_iInter₂.mpr fun k hk => hx (he.mem_toFinset.mp hk)
    · intro hx k hk
      exact Set.mem_iInter₂.mp hx k (he.mem_toFinset.mpr hk)
  rw [this, isScottOpen_iff_isOpen]
  exact isOpen_biInter_finset fun k _ =>
    (isScottOpen_iff_isOpen _).mp (mem_preimage hf k)

theorem ne_eq_open_union_closed {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) :
    {x | f x = e} = {x | ¬ f x ⊆ e} ∪ {x | ¬ e ⊆ f x} ∧
      IsScottOpen {x | ¬ f x ⊆ e} ∧
      IsScottOpen {x | ¬ e ⊆ f x}? := by
  refine ⟨?_, not_subset hf e, ?_⟩
  · ext x
    constructor
    · intro hne
      by_cases hsub : f x ⊆ e
      · refine Or.inr fun hsup => hne (subset_antisymm hsub hsup)
      · exact Or.inl hsub
    · intro h heq
      rcases h with h | h
      · exact h heq.subset
      · exact h heq.symm.subset
  · have : {x | ¬ e ⊆ f x}? = {x | e ⊆ f x} := by
      ext x; simp
    rw [this]
    exact subset_preimage hf he

end IsScottContinuous

end DomainTheory.DataTypesAsLattices
```

3

IsScottContinuous.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.Continuous.isOpen_memOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import Mathlib.Tactic.Bound.Init
```

```
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

class IsScottContinuous (f : Pomega → Pomega) : Prop where
  out : ∀ x, f x = scottUnion f x

namespace IsScottContinuous

theorem monotone {f : Pomega → Pomega}
    (hf : IsScottContinuous f) {x y : Pomega} (h : x ⊆ y) : f x ⊆ f y := by
  intro m hm
  rw [hf.out x, mem_scottUnion] at hm
  rw [hf.out y, mem_scottUnion]
  obtain ⟨n, hn, hmn⟩ := hm
  exact ⟨n, subset_trans hn h, hmn⟩

theorem determined {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g)
    (hfin : ∀ n, f (e n) = g (e n)) : f = g := by
  funext x
  rw [hf.out x, hg.out x]
  simp [scottUnion, scottPiece, hfin]

theorem iff_continuous (f : Pomega → Pomega) :
    IsScottContinuous f ↔ Continuous f := by
  constructor
  · intro hf
    refine continuous_generateFrom_iff.2 ?_
    rintro _ ⟨k, rfl⟩
    rw [← isScottOpen_iff_isOpen]
    refine ⟨{n | k ∈ f (e n)}, ?_⟩
    ext x
    constructor
    · intro hx
      have : k ∈ scottUnion f x := by rwa [← hf.out x]
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
      exact Set.mem_iUnion₂.mpr ⟨n, hkn, hn⟩
    · intro hx
      obtain ⟨n, hkn, hn⟩ := Set.mem_iUnion₂.mp hx
      exact monotone hf hn hkn
  · intro hfcont
    constructor
    intro x
    ext k
    have hopen : IsScottOpen (f ^-1' memOpen k) :=
      (isScottOpen_iff_isOpen _).mpr (IsOpen.preimage hfcont (isOpen_memOpen k))
    constructor
    · intro hk
      obtain ⟨B, hB⟩ := hopen
      have hx : x ∈ ⋃ n ∈ B, basicNhhd n := by
        have : x ∈ f ^-1' memOpen k := hk
```

```
        rwa [hB] at this
      obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
      have hen : k ∈ f (e n) := by
        have : e n ∈ f ^-1' memOpen k := by
          rw [hB]
          exact Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩
        exact this
      exact mem_scottUnion.mpr ⟨n, hxn, hen⟩
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e n ∈ f ^-1' memOpen k := hkn
      exact isScottOpen_isUpper hopen this hn

theorem mem_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f) (k : ℕ) :
    IsScottOpen {x | k ∈ f x} := by
  have : {x | k ∈ f x} = f ^-1' memOpen k := rfl
  rw [this, isScottOpen_iff_isOpen]
  exact IsOpen.preimage ((IsScottContinuous.iff_continuous f).mp hf) (isOpen_memOpen k
    )

theorem not_subset {f : Pomega → Pomega} (hf : IsScottContinuous f)
    (e : Pomega) : IsScottOpen {x | ¬ f x ⊆ e} := by
  have : {x | ¬ f x ⊆ e} = ⋃ k, {x | k ∈ e ∧ k ∈ f x} := by
    ext x
    constructor
    · intro hx
      obtain ⟨k, hk, hke⟩ := Set.not_subset.mp hx
      exact Set.mem_iUnion.mpr ⟨k, ⟨hke, hk⟩⟩
    · intro hx
      obtain ⟨k, hke, hk⟩ := Set.mem_iUnion.mp hx
      intro hsub
      exact hke (hsub hk)
  rw [this]
  exact IsScottOpen.iUnion _ fun k => by
    by_cases hke : k ∈ e
    · have : {x | k ∈ e ∧ k ∈ f x} = (∅ : Set Pomega) := by
        ext x; simp [hke]
      rw [this]; exact IsScottOpen.empty
    · have : {x | k ∈ e ∧ k ∈ f x} = {x | k ∈ f x} := by
        ext x; simp [hke]
      rw [this]; exact mem_preimage hf k

theorem subset_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) : IsScottOpen {x | e ⊆ f x} := by
  have : {x | e ⊆ f x} = ⋂ k ∈ he.toFinset, {x | k ∈ f x} := by
    ext x
    constructor
    · intro hx
      exact Set.mem_iInter₂.mpr fun k hk => hx (he.mem_toFinset.mp hk)
    · intro hx k hk
      exact Set.mem_iInter₂.mp hx k (he.mem_toFinset.mpr hk)
  rw [this, isScottOpen_iff_isOpen]
  exact isOpen_biInter_finset fun k _ =>
    (isScottOpen_iff_isOpen _).mp (mem_preimage hf k)

theorem ne_eq_open_union_closed {f : Pomega → Pomega} (hf : IsScottContinuous f)
```

```
    {e : Pomega} (he : e.Finite) :
    {x | f x = e} = {x | ¬ f x ⊆ e} ∪ {x | ¬ e ⊆ f x} ∧
      IsScottOpen {x | ¬ f x ⊆ e} ∧
      IsScottOpen {x | ¬ e ⊆ f x}? := by
  refine ⟨?_, not_subset hf e, ?_⟩
  · ext x
    constructor
    · intro hne
      by_cases hsub : f x ⊆ e
      · refine Or.inr fun hsup => hne (subset_antisymm hsub hsup)
      · exact Or.inl hsub
    · intro h heq
      rcases h with h | h
      · exact h heq.subset
      · exact h heq.symm.subset
  · have : {x | ¬ e ⊆ f x}? = {x | e ⊆ f x} := by
      ext x; simp
    rw [this]
    exact subset_preimage hf he

end IsScottContinuous

end DomainTheory.DataTypesAsLattices
```

4

IsScottContinuous.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.Continuous.isOpen_memOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import Mathlib.Tactic.Bound.Init
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

class IsScottContinuous (f : Pomega → Pomega) : Prop where
  out : ∀ x, f x = scottUnion f x

namespace IsScottContinuous

theorem monotone {f : Pomega → Pomega}
    (hf : IsScottContinuous f) {x y : Pomega} (h : x ⊆ y) : f x ⊆ f y := by
  intro m hm
  rw [hf.out x, mem_scottUnion] at hm
  rw [hf.out y, mem_scottUnion]
```

```
  obtain ⟨n, hn, hmn⟩ := hm
  exact ⟨n, subset_trans hn h, hmn⟩

theorem determined {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g)
    (hfin : ∀ n, f (e n) = g (e n)) : f = g := by
  funext x
  rw [hf.out x, hg.out x]
  simp [scottUnion, scottPiece, hfin]

theorem iff_continuous (f : Pomega → Pomega) :
    IsScottContinuous f ↔ Continuous f := by
  constructor
  · intro hf
    refine continuous_generateFrom_iff.2 ?_
    rintro _ ⟨k, rfl⟩
    rw [← isScottOpen_iff_isOpen]
    refine ⟨{n | k ∈ f (e n)}, ?_⟩
    ext x
    constructor
    · intro hx
      have : k ∈ scottUnion f x := by rwa [← hf.out x]
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
      exact Set.mem_iUnion₂.mpr ⟨n, hkn, hn⟩
    · intro hx
      obtain ⟨n, hkn, hn⟩ := Set.mem_iUnion₂.mp hx
      exact monotone hf hn hkn
  · intro hfcont
    constructor
    intro x
    ext k
    have hopen : IsScottOpen (f ^-1' memOpen k) :=
      (isScottOpen_iff_isOpen _).mpr (IsOpen.preimage hfcont (isOpen_memOpen k))
    constructor
    · intro hk
      obtain ⟨B, hB⟩ := hopen
      have hx : x ∈ ⋃ n ∈ B, basicNhhd n := by
        have : x ∈ f ^-1' memOpen k := hk
        rwa [hB] at this
      obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
      have hen : k ∈ f (e n) := by
        have : e n ∈ f ^-1' memOpen k := by
          rw [hB]
          exact Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩
        exact this
      exact mem_scottUnion.mpr ⟨n, hxn, hen⟩
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e n ∈ f ^-1' memOpen k := hkn
      exact isScottOpen_isUpper hopen this hn

theorem mem_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f) (k : ℕ) :
    IsScottOpen {x | k ∈ f x} := by
  have : {x | k ∈ f x} = f ^-1' memOpen k := rfl
  rw [this, isScottOpen_iff_isOpen]
  exact IsOpen.preimage ((IsScottContinuous.iff_continuous f).mp hf) (isOpen_memOpen k
```

```
    )

theorem not_subset {f : Pomega → Pomega} (hf : IsScottContinuous f)
    (e : Pomega) : IsScottOpen {x | ¬ f x ⊆ e} := by
  have : {x | ¬ f x ⊆ e} = ⋃ k, {x | k ∈ e ∧ k ∈ f x} := by
    ext x
    constructor
    · intro hx
      obtain ⟨k, hk, hke⟩ := Set.not_subset.mp hx
      exact Set.mem_iUnion.mpr ⟨k, ⟨hke, hk⟩⟩
    · intro hx
      obtain ⟨k, hke, hk⟩ := Set.mem_iUnion.mp hx
      intro hsub
      exact hke (hsub hk)
  rw [this]
  exact IsScottOpen.iUnion _ fun k => by
    by_cases hke : k ∈ e
    · have : {x | k ∈ e ∧ k ∈ f x} = (∅ : Set Pomega) := by
        ext x; simp [hke]
      rw [this]; exact IsScottOpen.empty
    · have : {x | k ∈ e ∧ k ∈ f x} = {x | k ∈ f x} := by
        ext x; simp [hke]
      rw [this]; exact mem_preimage hf k

theorem subset_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) : IsScottOpen {x | e ⊆ f x} := by
  have : {x | e ⊆ f x} = ⋂ k ∈ he.toFinset, {x | k ∈ f x} := by
    ext x
    constructor
    · intro hx
      exact Set.mem_iInter₂.mpr fun k hk => hx (he.mem_toFinset.mp hk)
    · intro hx k hk
      exact Set.mem_iInter₂.mp hx k (he.mem_toFinset.mpr hk)
  rw [this, isScottOpen_iff_isOpen]
  exact isOpen_biInter_finset fun k _ =>
    (isScottOpen_iff_isOpen _).mp (mem_preimage hf k)

theorem ne_eq_open_union_closed {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) :
    {x | f x = e} = {x | ¬ f x ⊆ e} ∪ {x | ¬ e ⊆ f x} ∧
      IsScottOpen {x | ¬ f x ⊆ e} ∧
      IsScottOpen {x | ¬ e ⊆ f x}? := by
  refine ⟨?_, not_subset hf e, ?_⟩
  · ext x
    constructor
    · intro hne
      by_cases hsub : f x ⊆ e
      · refine Or.inr fun hsup => hne (subset_antisymm hsub hsup)
      · exact Or.inl hsub
    · intro h heq
      rcases h with h | h
      · exact h heq.subset
      · exact h heq.symm.subset
  · have : {x | ¬ e ⊆ f x}? = {x | e ⊆ f x} := by
      ext x; simp
    rw [this]
```

```
    exact subset_preimage hf he

end IsScottContinuous

end DomainTheory.DataTypesAsLattices
```

5

IsScottContinuous.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.Continuous.isOpen_memOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import Mathlib.Tactic.Bound.Init
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

class IsScottContinuous (f : Pomega → Pomega) : Prop where
  out : ∀ x, f x = scottUnion f x

namespace IsScottContinuous

theorem monotone {f : Pomega → Pomega}
    (hf : IsScottContinuous f) {x y : Pomega} (h : x ⊆ y) : f x ⊆ f y := by
  intro m hm
  rw [hf.out x, mem_scottUnion] at hm
  rw [hf.out y, mem_scottUnion]
  obtain ⟨n, hn, hmn⟩ := hm
  exact ⟨n, subset_trans hn h, hmn⟩

theorem determined {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g)
    (hfin : ∀ n, f (e n) = g (e n)) : f = g := by
  funext x
  rw [hf.out x, hg.out x]
  simp [scottUnion, scottPiece, hfin]

theorem iff_continuous (f : Pomega → Pomega) :
    IsScottContinuous f ↔ Continuous f := by
  constructor
  · intro hf
    refine continuous_generateFrom_iff.2 ?_
    rintro _ ⟨k, rfl⟩
    rw [← isScottOpen_iff_isOpen]
    refine ⟨{n | k ∈ f (e n)}, ?_⟩
```

```
    ext x
    constructor
    · intro hx
      have : k ∈ scottUnion f x := by rwa [← hf.out x]
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
      exact Set.mem_iUnion₂.mpr ⟨n, hkn, hn⟩
    · intro hx
      obtain ⟨n, hkn, hn⟩ := Set.mem_iUnion₂.mp hx
      exact monotone hf hn hkn
  · intro hfcont
    constructor
    intro x
    ext k
    have hopen : IsScottOpen (f ^-1' memOpen k) :=
      (isScottOpen_iff_isOpen _).mpr (IsOpen.preimage hfcont (isOpen_memOpen k))
    constructor
    · intro hk
      obtain ⟨B, hB⟩ := hopen
      have hx : x ∈ ⋃ n ∈ B, basicNhhd n := by
        have : x ∈ f ^-1' memOpen k := hk
        rwa [hB] at this
      obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
      have hen : k ∈ f (e n) := by
        have : e n ∈ f ^-1' memOpen k := by
          rw [hB]
          exact Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩
        exact this
      exact mem_scottUnion.mpr ⟨n, hxn, hen⟩
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e n ∈ f ^-1' memOpen k := hkn
      exact isScottOpen_isUpper hopen this hn

theorem mem_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f) (k : ℕ) :
    IsScottOpen {x | k ∈ f x} := by
  have : {x | k ∈ f x} = f ^-1' memOpen k := rfl
  rw [this, isScottOpen_iff_isOpen]
  exact IsOpen.preimage ((IsScottContinuous.iff_continuous f).mp hf) (isOpen_memOpen k
    )

theorem not_subset {f : Pomega → Pomega} (hf : IsScottContinuous f)
    (e : Pomega) : IsScottOpen {x | ¬ f x ⊆ e} := by
  have : {x | ¬ f x ⊆ e} = ⋃ k, {x | k ∈ e ∧ k ∈ f x} := by
    ext x
    constructor
    · intro hx
      obtain ⟨k, hk, hke⟩ := Set.not_subset.mp hx
      exact Set.mem_iUnion.mpr ⟨k, ⟨hke, hk⟩⟩
    · intro hx
      obtain ⟨k, hke, hk⟩ := Set.mem_iUnion.mp hx
      intro hsub
      exact hke (hsub hk)
  rw [this]
  exact IsScottOpen.iUnion _ fun k => by
    by_cases hke : k ∈ e
    · have : {x | k ∈ e ∧ k ∈ f x} = (∅ : Set Pomega) := by
```

```
        ext x; simp [hke]
      rw [this]; exact IsScottOpen.empty
    · have : {x | k ∈ e ∧ k ∈ f x} = {x | k ∈ f x} := by
        ext x; simp [hke]
      rw [this]; exact mem_preimage hf k

theorem subset_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) : IsScottOpen {x | e ⊆ f x} := by
  have : {x | e ⊆ f x} = ⋂ k ∈ he.toFinset, {x | k ∈ f x} := by
    ext x
    constructor
    · intro hx
      exact Set.mem_iInter₂.mpr fun k hk => hx (he.mem_toFinset.mp hk)
    · intro hx k hk
      exact Set.mem_iInter₂.mp hx k (he.mem_toFinset.mpr hk)
  rw [this, isScottOpen_iff_isOpen]
  exact isOpen_biInter_finset fun k _ =>
    (isScottOpen_iff_isOpen _).mp (mem_preimage hf k)

theorem ne_eq_open_union_closed {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) :
    {x | f x = e} = {x | ¬ f x ⊆ e} ∪ {x | ¬ e ⊆ f x} ∧
      IsScottOpen {x | ¬ f x ⊆ e} ∧
      IsScottOpen {x | ¬ e ⊆ f x}? := by
  refine ⟨?_, not_subset hf e, ?_⟩
  · ext x
    constructor
    · intro hne
      by_cases hsub : f x ⊆ e
      · refine Or.inr fun hsup => hne (subset_antisymm hsub hsup)
      · exact Or.inl hsub
    · intro h heq
      rcases h with h | h
      · exact h heq.subset
      · exact h heq.symm.subset
  · have : {x | ¬ e ⊆ f x}? = {x | e ⊆ f x} := by
      ext x; simp
    rw [this]
    exact subset_preimage hf he

end IsScottContinuous

end DomainTheory.DataTypesAsLattices
```

6

IsScottContinuous.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.Continuous.isOpen_memOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
```

```
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import Mathlib.Tactic.Bound.Init
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

class IsScottContinuous (f : Pomega → Pomega) : Prop where
  out : ∀ x, f x = scottUnion f x

namespace IsScottContinuous

theorem monotone {f : Pomega → Pomega}
    (hf : IsScottContinuous f) {x y : Pomega} (h : x ⊆ y) : f x ⊆ f y := by
  intro m hm
  rw [hf.out x, mem_scottUnion] at hm
  rw [hf.out y, mem_scottUnion]
  obtain ⟨n, hn, hmn⟩ := hm
  exact ⟨n, subset_trans hn h, hmn⟩

theorem determined {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g)
    (hfin : ∀ n, f (e n) = g (e n)) : f = g := by
  funext x
  rw [hf.out x, hg.out x]
  simp [scottUnion, scottPiece, hfin]

theorem iff_continuous (f : Pomega → Pomega) :
    IsScottContinuous f ↔ Continuous f := by
  constructor
  · intro hf
    refine continuous_generateFrom_iff.2 ?_
    rintro _ ⟨k, rfl⟩
    rw [← isScottOpen_iff_isOpen]
    refine ⟨{n | k ∈ f (e n)}, ?_⟩
    ext x
    constructor
    · intro hx
      have : k ∈ scottUnion f x := by rwa [← hf.out x]
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
      exact Set.mem_iUnion₂.mpr ⟨n, hkn, hn⟩
    · intro hx
      obtain ⟨n, hkn, hn⟩ := Set.mem_iUnion₂.mp hx
      exact monotone hf hn hkn
  · intro hfcont
    constructor
    intro x
    ext k
    have hopen : IsScottOpen (f ^-1' memOpen k) :=
      (isScottOpen_iff_isOpen _).mpr (IsOpen.preimage hfcont (isOpen_memOpen k))
    constructor
    · intro hk
      obtain ⟨B, hB⟩ := hopen
```

```
      have hx : x ∈ ⋃ n ∈ B, basicNhhd n := by
        have : x ∈ f ^-1' memOpen k := hk
        rwa [hB] at this
      obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
      have hen : k ∈ f (e n) := by
        have : e n ∈ f ^-1' memOpen k := by
          rw [hB]
          exact Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩
        exact this
      exact mem_scottUnion.mpr ⟨n, hxn, hen⟩
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e n ∈ f ^-1' memOpen k := hkn
      exact isScottOpen_isUpper hopen this hn

theorem mem_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f) (k : ℕ) :
    IsScottOpen {x | k ∈ f x} := by
  have : {x | k ∈ f x} = f ^-1' memOpen k := rfl
  rw [this, isScottOpen_iff_isOpen]
  exact IsOpen.preimage ((IsScottContinuous.iff_continuous f).mp hf) (isOpen_memOpen k
    )

theorem not_subset {f : Pomega → Pomega} (hf : IsScottContinuous f)
    (e : Pomega) : IsScottOpen {x | ¬ f x ⊆ e} := by
  have : {x | ¬ f x ⊆ e} = ⋃ k, {x | k ∈ e ∧ k ∈ f x} := by
    ext x
    constructor
    · intro hx
      obtain ⟨k, hk, hke⟩ := Set.not_subset.mp hx
      exact Set.mem_iUnion.mpr ⟨k, ⟨hke, hk⟩⟩
    · intro hx
      obtain ⟨k, hke, hk⟩ := Set.mem_iUnion.mp hx
      intro hsub
      exact hke (hsub hk)
  rw [this]
  exact IsScottOpen.iUnion _ fun k => by
    by_cases hke : k ∈ e
    · have : {x | k ∈ e ∧ k ∈ f x} = (∅ : Set Pomega) := by
        ext x; simp [hke]
      rw [this]; exact IsScottOpen.empty
    · have : {x | k ∈ e ∧ k ∈ f x} = {x | k ∈ f x} := by
        ext x; simp [hke]
      rw [this]; exact mem_preimage hf k

theorem subset_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) : IsScottOpen {x | e ⊆ f x} := by
  have : {x | e ⊆ f x} = ⋂ k ∈ he.toFinset, {x | k ∈ f x} := by
    ext x
    constructor
    · intro hx
      exact Set.mem_iInter₂.mpr fun k hk => hx (he.mem_toFinset.mp hk)
    · intro hx k hk
      exact Set.mem_iInter₂.mp hx k (he.mem_toFinset.mpr hk)
  rw [this, isScottOpen_iff_isOpen]
  exact isOpen_biInter_finset fun k _ =>
    (isScottOpen_iff_isOpen _).mp (mem_preimage hf k)
```

```
theorem ne_eq_open_union_closed {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) :
    {x | f x = e} = {x | ¬ f x ⊆ e} ∪ {x | ¬ e ⊆ f x} ∧
      IsScottOpen {x | ¬ f x ⊆ e} ∧
      IsScottOpen {x | ¬ e ⊆ f x}? := by
  refine ⟨?_, not_subset hf e, ?_⟩
  · ext x
    constructor
    · intro hne
      by_cases hsub : f x ⊆ e
      · refine Or.inr fun hsup => hne (subset_antisymm hsub hsup)
      · exact Or.inl hsub
    · intro h heq
      rcases h with h | h
      · exact h heq.subset
      · exact h heq.symm.subset
  · have : {x | ¬ e ⊆ f x}? = {x | e ⊆ f x} := by
      ext x; simp
    rw [this]
    exact subset_preimage hf he

end IsScottContinuous

end DomainTheory.DataTypesAsLattices
```

7

IsScottContinuous.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.Continuous.isOpen_memOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import Mathlib.Tactic.Bound.Init
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

class IsScottContinuous (f : Pomega → Pomega) : Prop where
  out : ∀ x, f x = scottUnion f x

namespace IsScottContinuous

theorem monotone {f : Pomega → Pomega}
    (hf : IsScottContinuous f) {x y : Pomega} (h : x ⊆ y) : f x ⊆ f y := by
  intro m hm
```

```
  rw [hf.out x, mem_scottUnion] at hm
  rw [hf.out y, mem_scottUnion]
  obtain ⟨n, hn, hmn⟩ := hm
  exact ⟨n, subset_trans hn h, hmn⟩

theorem determined {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g)
    (hfin : ∀ n, f (e n) = g (e n)) : f = g := by
  funext x
  rw [hf.out x, hg.out x]
  simp [scottUnion, scottPiece, hfin]

theorem iff_continuous (f : Pomega → Pomega) :
    IsScottContinuous f ↔ Continuous f := by
  constructor
  · intro hf
    refine continuous_generateFrom_iff.2 ?_
    rintro _ ⟨k, rfl⟩
    rw [← isScottOpen_iff_isOpen]
    refine ⟨{n | k ∈ f (e n)}, ?_⟩
    ext x
    constructor
    · intro hx
      have : k ∈ scottUnion f x := by rwa [← hf.out x]
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
      exact Set.mem_iUnion₂.mpr ⟨n, hkn, hn⟩
    · intro hx
      obtain ⟨n, hkn, hn⟩ := Set.mem_iUnion₂.mp hx
      exact monotone hf hn hkn
  · intro hfcont
    constructor
    intro x
    ext k
    have hopen : IsScottOpen (f ^-1' memOpen k) :=
      (isScottOpen_iff_isOpen _).mpr (IsOpen.preimage hfcont (isOpen_memOpen k))
    constructor
    · intro hk
      obtain ⟨B, hB⟩ := hopen
      have hx : x ∈ ⋃ n ∈ B, basicNhhd n := by
        have : x ∈ f ^-1' memOpen k := hk
        rwa [hB] at this
      obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
      have hen : k ∈ f (e n) := by
        have : e n ∈ f ^-1' memOpen k := by
          rw [hB]
          exact Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩
        exact this
      exact mem_scottUnion.mpr ⟨n, hxn, hen⟩
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e n ∈ f ^-1' memOpen k := hkn
      exact isScottOpen_isUpper hopen this hn

theorem mem_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f) (k : ℕ) :
    IsScottOpen {x | k ∈ f x} := by
  have : {x | k ∈ f x} = f ^-1' memOpen k := rfl
```

```
  rw [this, isScottOpen_iff_isOpen]
  exact IsOpen.preimage ((IsScottContinuous.iff_continuous f).mp hf) (isOpen_memOpen k
    )

theorem not_subset {f : Pomega → Pomega} (hf : IsScottContinuous f)
    (e : Pomega) : IsScottOpen {x | ¬ f x ⊆ e} := by
  have : {x | ¬ f x ⊆ e} = ⋃ k, {x | k ∈ e ∧ k ∈ f x} := by
    ext x
    constructor
    · intro hx
      obtain ⟨k, hk, hke⟩ := Set.not_subset.mp hx
      exact Set.mem_iUnion.mpr ⟨k, ⟨hke, hk⟩⟩
    · intro hx
      obtain ⟨k, hke, hk⟩ := Set.mem_iUnion.mp hx
      intro hsub
      exact hke (hsub hk)
  rw [this]
  exact IsScottOpen.iUnion _ fun k => by
    by_cases hke : k ∈ e
    · have : {x | k ∈ e ∧ k ∈ f x} = (∅ : Set Pomega) := by
        ext x; simp [hke]
      rw [this]; exact IsScottOpen.empty
    · have : {x | k ∈ e ∧ k ∈ f x} = {x | k ∈ f x} := by
        ext x; simp [hke]
      rw [this]; exact mem_preimage hf k

theorem subset_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) : IsScottOpen {x | e ⊆ f x} := by
  have : {x | e ⊆ f x} = ⋂ k ∈ he.toFinset, {x | k ∈ f x} := by
    ext x
    constructor
    · intro hx
      exact Set.mem_iInter₂.mpr fun k hk => hx (he.mem_toFinset.mp hk)
    · intro hx k hk
      exact Set.mem_iInter₂.mp hx k (he.mem_toFinset.mpr hk)
  rw [this, isScottOpen_iff_isOpen]
  exact isOpen_biInter_finset fun k _ =>
    (isScottOpen_iff_isOpen _).mp (mem_preimage hf k)

theorem ne_eq_open_union_closed {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) :
    {x | f x = e} = {x | ¬ f x ⊆ e} ∪ {x | ¬ e ⊆ f x} ∧
      IsScottOpen {x | ¬ f x ⊆ e} ∧
      IsScottOpen {x | ¬ e ⊆ f x}? := by
  refine ⟨?_, not_subset hf e, ?_⟩
  · ext x
    constructor
    · intro hne
      by_cases hsub : f x ⊆ e
      · refine Or.inr fun hsup => hne (subset_antisymm hsub hsup)
      · exact Or.inl hsub
    · intro h heq
      rcases h with h | h
      · exact h heq.subset
      · exact h heq.symm.subset
  · have : {x | ¬ e ⊆ f x}? = {x | e ⊆ f x} := by
```

```
      ext x; simp
    rw [this]
    exact subset_preimage hf he

end IsScottContinuous

end DomainTheory.DataTypesAsLattices
```

8

IsScottContinuous.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.scottUnion
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottOpen_more
import DomainTheory.DataTypesAsLattices.Continuous.isOpen_memOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_iff_isOpen
import DomainTheory.DataTypesAsLattices.Continuous.isScottOpen_isUpper
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import Mathlib.Tactic.Bound.Init
import Mathlib.Data.Set.Finite.Basic

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

class IsScottContinuous (f : Pomega → Pomega) : Prop where
  out : ∀ x, f x = scottUnion f x

namespace IsScottContinuous

theorem monotone {f : Pomega → Pomega}
    (hf : IsScottContinuous f) {x y : Pomega} (h : x ⊆ y) : f x ⊆ f y := by
  intro m hm
  rw [hf.out x, mem_scottUnion] at hm
  rw [hf.out y, mem_scottUnion]
  obtain ⟨n, hn, hmn⟩ := hm
  exact ⟨n, subset_trans hn h, hmn⟩

theorem determined {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g)
    (hfin : ∀ n, f (e n) = g (e n)) : f = g := by
  funext x
  rw [hf.out x, hg.out x]
  simp [scottUnion, scottPiece, hfin]

theorem iff_continuous (f : Pomega → Pomega) :
    IsScottContinuous f ↔ Continuous f := by
  constructor
  · intro hf
    refine continuous_generateFrom_iff.2 ?_
    rintro _ ⟨k, rfl⟩
```

```
    rw [← isScottOpen_iff_isOpen]
    refine ⟨{n | k ∈ f (e n)}, ?_⟩
    ext x
    constructor
    · intro hx
      have : k ∈ scottUnion f x := by rwa [← hf.out x]
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
      exact Set.mem_iUnion₂.mpr ⟨n, hkn, hn⟩
    · intro hx
      obtain ⟨n, hkn, hn⟩ := Set.mem_iUnion₂.mp hx
      exact monotone hf hn hkn
  · intro hfcont
    constructor
    intro x
    ext k
    have hopen : IsScottOpen (f ^-1' memOpen k) :=
      (isScottOpen_iff_isOpen _).mpr (IsOpen.preimage hfcont (isOpen_memOpen k))
    constructor
    · intro hk
      obtain ⟨B, hB⟩ := hopen
      have hx : x ∈ ⋃ n ∈ B, basicNhhd n := by
        have : x ∈ f ^-1' memOpen k := hk
        rwa [hB] at this
      obtain ⟨n, hn, hxn⟩ := Set.mem_iUnion₂.mp hx
      have hen : k ∈ f (e n) := by
        have : e n ∈ f ^-1' memOpen k := by
          rw [hB]
          exact Set.mem_iUnion₂.mpr ⟨n, hn, (subset_rfl : e n ⊆ e n)⟩
        exact this
      exact mem_scottUnion.mpr ⟨n, hxn, hen⟩
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e n ∈ f ^-1' memOpen k := hkn
      exact isScottOpen_isUpper hopen this hn

theorem mem_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f) (k : ℕ) :
    IsScottOpen {x | k ∈ f x} := by
  have : {x | k ∈ f x} = f ^-1' memOpen k := rfl
  rw [this, isScottOpen_iff_isOpen]
  exact IsOpen.preimage ((IsScottContinuous.iff_continuous f).mp hf) (isOpen_memOpen k
    )

theorem not_subset {f : Pomega → Pomega} (hf : IsScottContinuous f)
    (e : Pomega) : IsScottOpen {x | ¬ f x ⊆ e} := by
  have : {x | ¬ f x ⊆ e} = ⋃ k, {x | k ∈ e ∧ k ∈ f x} := by
    ext x
    constructor
    · intro hx
      obtain ⟨k, hk, hke⟩ := Set.not_subset.mp hx
      exact Set.mem_iUnion.mpr ⟨k, ⟨hke, hk⟩⟩
    · intro hx
      obtain ⟨k, hke, hk⟩ := Set.mem_iUnion.mp hx
      intro hsub
      exact hke (hsub hk)
  rw [this]
  exact IsScottOpen.iUnion _ fun k => by
```

```
    by_cases hke : k ∈ e
    · have : {x | k ∈ e ∧ k ∈ f x} = (∅ : Set Pomega) := by
        ext x; simp [hke]
      rw [this]; exact IsScottOpen.empty
    · have : {x | k ∈ e ∧ k ∈ f x} = {x | k ∈ f x} := by
        ext x; simp [hke]
      rw [this]; exact mem_preimage hf k

theorem subset_preimage {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) : IsScottOpen {x | e ⊆ f x} := by
  have : {x | e ⊆ f x} = ⋂ k ∈ he.toFinset, {x | k ∈ f x} := by
    ext x
    constructor
    · intro hx
      exact Set.mem_iInter₂.mpr fun k hk => hx (he.mem_toFinset.mp hk)
    · intro hx k hk
      exact Set.mem_iInter₂.mp hx k (he.mem_toFinset.mpr hk)
  rw [this, isScottOpen_iff_isOpen]
  exact isOpen_biInter_finset fun k _ =>
    (isScottOpen_iff_isOpen _).mp (mem_preimage hf k)

theorem ne_eq_open_union_closed {f : Pomega → Pomega} (hf : IsScottContinuous f)
    {e : Pomega} (he : e.Finite) :
    {x | f x = e} = {x | ¬ f x ⊆ e} ∪ {x | ¬ e ⊆ f x} ∧
      IsScottOpen {x | ¬ f x ⊆ e} ∧
      IsScottOpen {x | ¬ e ⊆ f x}? := by
  refine ⟨?_, not_subset hf e, ?_⟩
  · ext x
    constructor
    · intro hne
      by_cases hsub : f x ⊆ e
      · refine Or.inr fun hsup => hne (subset_antisymm hsub hsup)
      · exact Or.inl hsub
    · intro h heq
      rcases h with h | h
      · exact h heq.subset
      · exact h heq.symm.subset
  · have : {x | ¬ e ⊆ f x}? = {x | e ⊆ f x} := by
      ext x; simp
    rw [this]
    exact subset_preimage hf he

end IsScottContinuous

end DomainTheory.DataTypesAsLattices
```

9

theorem_1_1.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.exists_e_cover_finite
```

```
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_1 (f : Pomega → Pomega) :
    IsScottContinuous f ↔
      ∀ x m, e m ⊆ f x ↔ ∃ n, e n ⊆ x ∧ e m ⊆ f (e n) := by
  constructor
  · intro hf x m
    constructor
    · intro hmf
      have : ∀ k ∈ e m, ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
        intro k hk
        have : k ∈ scottUnion f x := by
          rw [← hf.out x]; exact hmf hk
        exact mem_scottUnion.mp this
      obtain ⟨s, hs⟩ := (e.finite m).exists_finset_coe
      obtain ⟨N, hN, hsf⟩ := exists_e_cover_finite hf s (fun k hk =>
        this k (by
          have : k ∈ (s : Set ℕ) := hk
          rwa [hs] at this))
      exact ⟨N, hN, by simpa [hs] using hsf⟩
    · intro ⟨n, hn, hmf⟩
      exact subset_trans hmf (IsScottContinuous.monotone hf hn)
  · intro h
    constructor
    intro x
    ext k
    constructor
    · intro hk
      have : e (2 ^ k) ⊆ f x := by
        simp [e.pow2, Set.singleton_subset_iff, hk]
      obtain ⟨n, hn, hkn⟩ := (h x (2 ^ k)).mp this
      refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
      simpa [e.pow2, Set.singleton_subset_iff] using hkn
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e (2 ^ k) ⊆ f (e n) := by
        simp [e.pow2, Set.singleton_subset_iff, hkn]
      have : e (2 ^ k) ⊆ f x := (h x (2 ^ k)).mpr ⟨n, hn, this⟩
      simpa [e.pow2, Set.singleton_subset_iff] using this

end DomainTheory.DataTypesAsLattices
```

0

theorem_1_1.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.exists_e_cover_finite

@[expose] public section
```

```
namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_1 (f : Pomega → Pomega) :
    IsScottContinuous f ↔
      ∀ x m, e m ⊆ f x ↔ ∃ n, e n ⊆ x ∧ e m ⊆ f (e n) := by
  constructor
  · intro hf x m
    constructor
    · intro hmf
      have : ∀ k ∈ e m, ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
        intro k hk
        have : k ∈ scottUnion f x := by
          rw [← hf.out x]; exact hmf hk
        exact mem_scottUnion.mp this
      obtain ⟨s, hs⟩ := (e.finite m).exists_finset_coe
      obtain ⟨N, hN, hsf⟩ := exists_e_cover_finite hf s (fun k hk =>
        this k (by
          have : k ∈ (s : Set ℕ) := hk
          rwa [hs] at this))
      exact ⟨N, hN, by simpa [hs] using hsf⟩
    · intro ⟨n, hn, hmf⟩
      exact subset_trans hmf (IsScottContinuous.monotone hf hn)
  · intro h
    constructor
    intro x
    ext k
    constructor
    · intro hk
      have : e (2 ^ k) ⊆ f x := by
        simp [e.pow2, Set.singleton_subset_iff, hk]
      obtain ⟨n, hn, hkn⟩ := (h x (2 ^ k)).mp this
      refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
      simpa [e.pow2, Set.singleton_subset_iff] using hkn
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e (2 ^ k) ⊆ f (e n) := by
        simp [e.pow2, Set.singleton_subset_iff, hkn]
      have : e (2 ^ k) ⊆ f x := (h x (2 ^ k)).mpr ⟨n, hn, this⟩
      simpa [e.pow2, Set.singleton_subset_iff] using this

end DomainTheory.DataTypesAsLattices
```

1

theorem_1_1.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.exists_e_cover_finite

@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
theorem theorem_1_1 (f : Pomega → Pomega) :
    IsScottContinuous f ↔
      ∀ x m, e m ⊆ f x ↔ ∃ n, e n ⊆ x ∧ e m ⊆ f (e n) := by
  constructor
  · intro hf x m
    constructor
    · intro hmf
      have : ∀ k ∈ e m, ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
        intro k hk
        have : k ∈ scottUnion f x := by
          rw [← hf.out x]; exact hmf hk
        exact mem_scottUnion.mp this
      obtain ⟨s, hs⟩ := (e.finite m).exists_finset_coe
      obtain ⟨N, hN, hsf⟩ := exists_e_cover_finite hf s (fun k hk =>
        this k (by
          have : k ∈ (s : Set ℕ) := hk
          rwa [hs] at this))
      exact ⟨N, hN, by simpa [hs] using hsf⟩
    · intro ⟨n, hn, hmf⟩
      exact subset_trans hmf (IsScottContinuous.monotone hf hn)
  · intro h
    constructor
    intro x
    ext k
    constructor
    · intro hk
      have : e (2 ^ k) ⊆ f x := by
        simp [e.pow2, Set.singleton_subset_iff, hk]
      obtain ⟨n, hn, hkn⟩ := (h x (2 ^ k)).mp this
      refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
      simpa [e.pow2, Set.singleton_subset_iff] using hkn
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e (2 ^ k) ⊆ f (e n) := by
        simp [e.pow2, Set.singleton_subset_iff, hkn]
      have : e (2 ^ k) ⊆ f x := (h x (2 ^ k)).mpr ⟨n, hn, this⟩
      simpa [e.pow2, Set.singleton_subset_iff] using this

end DomainTheory.DataTypesAsLattices
```

2

theorem_1_1.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.exists_e_cover_finite

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_1 (f : Pomega → Pomega) :
    IsScottContinuous f ↔
```

```
      ∀ x m, e m ⊆ f x ↔ ∃ n, e n ⊆ x ∧ e m ⊆ f (e n) := by
  constructor
  · intro hf x m
    constructor
    · intro hmf
      have : ∀ k ∈ e m, ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
        intro k hk
        have : k ∈ scottUnion f x := by
          rw [← hf.out x]; exact hmf hk
        exact mem_scottUnion.mp this
      obtain ⟨s, hs⟩ := (e.finite m).exists_finset_coe
      obtain ⟨N, hN, hsf⟩ := exists_e_cover_finite hf s (fun k hk =>
        this k (by
          have : k ∈ (s : Set ℕ) := hk
          rwa [hs] at this))
      exact ⟨N, hN, by simpa [hs] using hsf⟩
    · intro ⟨n, hn, hmf⟩
      exact subset_trans hmf (IsScottContinuous.monotone hf hn)
  · intro h
    constructor
    intro x
    ext k
    constructor
    · intro hk
      have : e (2 ^ k) ⊆ f x := by
        simp [e.pow2, Set.singleton_subset_iff, hk]
      obtain ⟨n, hn, hkn⟩ := (h x (2 ^ k)).mp this
      refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
      simpa [e.pow2, Set.singleton_subset_iff] using hkn
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e (2 ^ k) ⊆ f (e n) := by
        simp [e.pow2, Set.singleton_subset_iff, hkn]
      have : e (2 ^ k) ⊆ f x := (h x (2 ^ k)).mpr ⟨n, hn, this⟩
      simpa [e.pow2, Set.singleton_subset_iff] using this

end DomainTheory.DataTypesAsLattices
```

3

theorem_1_1.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.exists_e_cover_finite

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_1 (f : Pomega → Pomega) :
    IsScottContinuous f ↔
      ∀ x m, e m ⊆ f x ↔ ∃ n, e n ⊆ x ∧ e m ⊆ f (e n) := by
  constructor
```

```
  · intro hf x m
    constructor
    · intro hmf
      have : ∀ k ∈ e m, ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
        intro k hk
        have : k ∈ scottUnion f x := by
          rw [← hf.out x]; exact hmf hk
        exact mem_scottUnion.mp this
      obtain ⟨s, hs⟩ := (e.finite m).exists_finset_coe
      obtain ⟨N, hN, hsf⟩ := exists_e_cover_finite hf s (fun k hk =>
        this k (by
          have : k ∈ (s : Set ℕ) := hk
          rwa [hs] at this))
      exact ⟨N, hN, by simpa [hs] using hsf⟩
    · intro ⟨n, hn, hmf⟩
      exact subset_trans hmf (IsScottContinuous.monotone hf hn)
  · intro h
    constructor
    intro x
    ext k
    constructor
    · intro hk
      have : e (2 ^ k) ⊆ f x := by
        simp [e.pow2, Set.singleton_subset_iff, hk]
      obtain ⟨n, hn, hkn⟩ := (h x (2 ^ k)).mp this
      refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
      simpa [e.pow2, Set.singleton_subset_iff] using hkn
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e (2 ^ k) ⊆ f (e n) := by
        simp [e.pow2, Set.singleton_subset_iff, hkn]
      have : e (2 ^ k) ⊆ f x := (h x (2 ^ k)).mpr ⟨n, hn, this⟩
      simpa [e.pow2, Set.singleton_subset_iff] using this

end DomainTheory.DataTypesAsLattices
```

4

theorem_1_1.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.exists_e_cover_finite

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_1 (f : Pomega → Pomega) :
    IsScottContinuous f ↔
      ∀ x m, e m ⊆ f x ↔ ∃ n, e n ⊆ x ∧ e m ⊆ f (e n) := by
  constructor
  · intro hf x m
    constructor
```

```
    · intro hmf
      have : ∀ k ∈ e m, ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
        intro k hk
        have : k ∈ scottUnion f x := by
          rw [← hf.out x]; exact hmf hk
        exact mem_scottUnion.mp this
      obtain ⟨s, hs⟩ := (e.finite m).exists_finset_coe
      obtain ⟨N, hN, hsf⟩ := exists_e_cover_finite hf s (fun k hk =>
        this k (by
          have : k ∈ (s : Set ℕ) := hk
          rwa [hs] at this))
      exact ⟨N, hN, by simpa [hs] using hsf⟩
    · intro ⟨n, hn, hmf⟩
      exact subset_trans hmf (IsScottContinuous.monotone hf hn)
  · intro h
    constructor
    intro x
    ext k
    constructor
    · intro hk
      have : e (2 ^ k) ⊆ f x := by
        simp [e.pow2, Set.singleton_subset_iff, hk]
      obtain ⟨n, hn, hkn⟩ := (h x (2 ^ k)).mp this
      refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
      simpa [e.pow2, Set.singleton_subset_iff] using hkn
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e (2 ^ k) ⊆ f (e n) := by
        simp [e.pow2, Set.singleton_subset_iff, hkn]
      have : e (2 ^ k) ⊆ f x := (h x (2 ^ k)).mpr ⟨n, hn, this⟩
      simpa [e.pow2, Set.singleton_subset_iff] using this

end DomainTheory.DataTypesAsLattices
```

5

theorem_1_1.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.exists_e_cover_finite

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_1 (f : Pomega → Pomega) :
    IsScottContinuous f ↔
      ∀ x m, e m ⊆ f x ↔ ∃ n, e n ⊆ x ∧ e m ⊆ f (e n) := by
  constructor
  · intro hf x m
    constructor
    · intro hmf
      have : ∀ k ∈ e m, ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
```

```
        intro k hk
        have : k ∈ scottUnion f x := by
          rw [← hf.out x]; exact hmf hk
        exact mem_scottUnion.mp this
      obtain ⟨s, hs⟩ := (e.finite m).exists_finset_coe
      obtain ⟨N, hN, hsf⟩ := exists_e_cover_finite hf s (fun k hk =>
        this k (by
          have : k ∈ (s : Set ℕ) := hk
          rwa [hs] at this))
      exact ⟨N, hN, by simpa [hs] using hsf⟩
    · intro ⟨n, hn, hmf⟩
      exact subset_trans hmf (IsScottContinuous.monotone hf hn)
  · intro h
    constructor
    intro x
    ext k
    constructor
    · intro hk
      have : e (2 ^ k) ⊆ f x := by
        simp [e.pow2, Set.singleton_subset_iff, hk]
      obtain ⟨n, hn, hkn⟩ := (h x (2 ^ k)).mp this
      refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
      simpa [e.pow2, Set.singleton_subset_iff] using hkn
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e (2 ^ k) ⊆ f (e n) := by
        simp [e.pow2, Set.singleton_subset_iff, hkn]
      have : e (2 ^ k) ⊆ f x := (h x (2 ^ k)).mpr ⟨n, hn, this⟩
      simpa [e.pow2, Set.singleton_subset_iff] using this

end DomainTheory.DataTypesAsLattices
```

6

theorem_1_1.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.exists_e_cover_finite

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_1 (f : Pomega → Pomega) :
    IsScottContinuous f ↔
      ∀ x m, e m ⊆ f x ↔ ∃ n, e n ⊆ x ∧ e m ⊆ f (e n) := by
  constructor
  · intro hf x m
    constructor
    · intro hmf
      have : ∀ k ∈ e m, ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
        intro k hk
        have : k ∈ scottUnion f x := by
```

```
          rw [← hf.out x]; exact hmf hk
        exact mem_scottUnion.mp this
      obtain ⟨s, hs⟩ := (e.finite m).exists_finset_coe
      obtain ⟨N, hN, hsf⟩ := exists_e_cover_finite hf s (fun k hk =>
        this k (by
          have : k ∈ (s : Set ℕ) := hk
          rwa [hs] at this))
      exact ⟨N, hN, by simpa [hs] using hsf⟩
    · intro ⟨n, hn, hmf⟩
      exact subset_trans hmf (IsScottContinuous.monotone hf hn)
  · intro h
    constructor
    intro x
    ext k
    constructor
    · intro hk
      have : e (2 ^ k) ⊆ f x := by
        simp [e.pow2, Set.singleton_subset_iff, hk]
      obtain ⟨n, hn, hkn⟩ := (h x (2 ^ k)).mp this
      refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
      simpa [e.pow2, Set.singleton_subset_iff] using hkn
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e (2 ^ k) ⊆ f (e n) := by
        simp [e.pow2, Set.singleton_subset_iff, hkn]
      have : e (2 ^ k) ⊆ f x := (h x (2 ^ k)).mpr ⟨n, hn, this⟩
      simpa [e.pow2, Set.singleton_subset_iff] using this

end DomainTheory.DataTypesAsLattices
```

7

theorem_1_1.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.exists_e_cover_finite

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_1 (f : Pomega → Pomega) :
    IsScottContinuous f ↔
      ∀ x m, e m ⊆ f x ↔ ∃ n, e n ⊆ x ∧ e m ⊆ f (e n) := by
  constructor
  · intro hf x m
    constructor
    · intro hmf
      have : ∀ k ∈ e m, ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
        intro k hk
        have : k ∈ scottUnion f x := by
          rw [← hf.out x]; exact hmf hk
        exact mem_scottUnion.mp this
```

```
      obtain ⟨s, hs⟩ := (e.finite m).exists_finset_coe
      obtain ⟨N, hN, hsf⟩ := exists_e_cover_finite hf s (fun k hk =>
        this k (by
          have : k ∈ (s : Set ℕ) := hk
          rwa [hs] at this))
      exact ⟨N, hN, by simpa [hs] using hsf⟩
    · intro ⟨n, hn, hmf⟩
      exact subset_trans hmf (IsScottContinuous.monotone hf hn)
  · intro h
    constructor
    intro x
    ext k
    constructor
    · intro hk
      have : e (2 ^ k) ⊆ f x := by
        simp [e.pow2, Set.singleton_subset_iff, hk]
      obtain ⟨n, hn, hkn⟩ := (h x (2 ^ k)).mp this
      refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
      simpa [e.pow2, Set.singleton_subset_iff] using hkn
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e (2 ^ k) ⊆ f (e n) := by
        simp [e.pow2, Set.singleton_subset_iff, hkn]
      have : e (2 ^ k) ⊆ f x := (h x (2 ^ k)).mpr ⟨n, hn, this⟩
      simpa [e.pow2, Set.singleton_subset_iff] using this

end DomainTheory.DataTypesAsLattices
```

8

theorem_1_1.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.exists_e_cover_finite

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_1 (f : Pomega → Pomega) :
    IsScottContinuous f ↔
      ∀ x m, e m ⊆ f x ↔ ∃ n, e n ⊆ x ∧ e m ⊆ f (e n) := by
  constructor
  · intro hf x m
    constructor
    · intro hmf
      have : ∀ k ∈ e m, ∃ n, e n ⊆ x ∧ k ∈ f (e n) := by
        intro k hk
        have : k ∈ scottUnion f x := by
          rw [← hf.out x]; exact hmf hk
        exact mem_scottUnion.mp this
      obtain ⟨s, hs⟩ := (e.finite m).exists_finset_coe
      obtain ⟨N, hN, hsf⟩ := exists_e_cover_finite hf s (fun k hk =>
```

```
        this k (by
          have : k ∈ (s : Set ℕ) := hk
          rwa [hs] at this))
      exact ⟨N, hN, by simpa [hs] using hsf⟩
    · intro ⟨n, hn, hmf⟩
      exact subset_trans hmf (IsScottContinuous.monotone hf hn)
  · intro h
    constructor
    intro x
    ext k
    constructor
    · intro hk
      have : e (2 ^ k) ⊆ f x := by
        simp [e.pow2, Set.singleton_subset_iff, hk]
      obtain ⟨n, hn, hkn⟩ := (h x (2 ^ k)).mp this
      refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
      simpa [e.pow2, Set.singleton_subset_iff] using hkn
    · intro hk
      obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
      have : e (2 ^ k) ⊆ f (e n) := by
        simp [e.pow2, Set.singleton_subset_iff, hkn]
      have : e (2 ^ k) ⊆ f x := (h x (2 ^ k)).mpr ⟨n, hn, this⟩
      simpa [e.pow2, Set.singleton_subset_iff] using this

end DomainTheory.DataTypesAsLattices
```

9

graph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def graph (f : Pomega → Pomega) : Pomega :=
  {p | ∃ n m, p = pair n m ∧ m ∈ f (e n)}

def lam (τ : Pomega → Pomega) : Pomega := graph τ

namespace lam

theorem eq_graph (τ : Pomega → Pomega) : lam τ = graph τ := rfl

end lam

end DomainTheory.DataTypesAsLattices
```

0

graph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def graph (f : Pomega → Pomega) : Pomega :=
  {p | ∃ n m, p = pair n m ∧ m ∈ f (e n)}

def lam (τ : Pomega → Pomega) : Pomega := graph τ

namespace lam

theorem eq_graph (τ : Pomega → Pomega) : lam τ = graph τ := rfl

end lam

end DomainTheory.DataTypesAsLattices
```

1

graph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def graph (f : Pomega → Pomega) : Pomega :=
  {p | ∃ n m, p = pair n m ∧ m ∈ f (e n)}

def lam (τ : Pomega → Pomega) : Pomega := graph τ

namespace lam

theorem eq_graph (τ : Pomega → Pomega) : lam τ = graph τ := rfl

end lam

end DomainTheory.DataTypesAsLattices
```

2

graph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
```

```
public import DomainTheory.DataTypesAsLattices.Pomega.e
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def graph (f : Pomega → Pomega) : Pomega :=
  {p | ∃ n m, p = pair n m ∧ m ∈ f (e n)}

def lam (τ : Pomega → Pomega) : Pomega := graph τ

namespace lam

theorem eq_graph (τ : Pomega → Pomega) : lam τ = graph τ := rfl

end lam

end DomainTheory.DataTypesAsLattices
```

3

graph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def graph (f : Pomega → Pomega) : Pomega :=
  {p | ∃ n m, p = pair n m ∧ m ∈ f (e n)}

def lam (τ : Pomega → Pomega) : Pomega := graph τ

namespace lam

theorem eq_graph (τ : Pomega → Pomega) : lam τ = graph τ := rfl

end lam

end DomainTheory.DataTypesAsLattices
```

4

graph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
def graph (f : Pomega → Pomega) : Pomega :=
  {p | ∃ n m, p = pair n m ∧ m ∈ f (e n)}

def lam (τ : Pomega → Pomega) : Pomega := graph τ

namespace lam

theorem eq_graph (τ : Pomega → Pomega) : lam τ = graph τ := rfl

end lam

end DomainTheory.DataTypesAsLattices
```

5

graph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def graph (f : Pomega → Pomega) : Pomega :=
  {p | ∃ n m, p = pair n m ∧ m ∈ f (e n)}

def lam (τ : Pomega → Pomega) : Pomega := graph τ

namespace lam

theorem eq_graph (τ : Pomega → Pomega) : lam τ = graph τ := rfl

end lam

end DomainTheory.DataTypesAsLattices
```

6

graph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def graph (f : Pomega → Pomega) : Pomega :=
  {p | ∃ n m, p = pair n m ∧ m ∈ f (e n)}
```

```
def lam (τ : Pomega → Pomega) : Pomega := graph τ

namespace lam

theorem eq_graph (τ : Pomega → Pomega) : lam τ = graph τ := rfl

end lam

end DomainTheory.DataTypesAsLattices
```

7

graph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def graph (f : Pomega → Pomega) : Pomega :=
  {p | ∃ n m, p = pair n m ∧ m ∈ f (e n)}

def lam (τ : Pomega → Pomega) : Pomega := graph τ

namespace lam

theorem eq_graph (τ : Pomega → Pomega) : lam τ = graph τ := rfl

end lam

end DomainTheory.DataTypesAsLattices
```

8

graph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def graph (f : Pomega → Pomega) : Pomega :=
  {p | ∃ n m, p = pair n m ∧ m ∈ f (e n)}

def lam (τ : Pomega → Pomega) : Pomega := graph τ

namespace lam
```

```
theorem eq_graph (τ : Pomega → Pomega) : lam τ = graph τ := rfl

end lam

end DomainTheory.DataTypesAsLattices
```

9

IsGraph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

class IsGraph (u : Pomega) : Prop where
  out : ∀ {{k m n}}, pair k m ∈ u → e k ⊆ e n → pair n m ∈ u

end DomainTheory.DataTypesAsLattices
```

0

IsGraph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

class IsGraph (u : Pomega) : Prop where
  out : ∀ {{k m n}}, pair k m ∈ u → e k ⊆ e n → pair n m ∈ u

end DomainTheory.DataTypesAsLattices
```

1

IsGraph.lean

```
module
```

```
public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

class IsGraph (u : Pomega) : Prop where
  out : ∀ {{k m n}}, pair k m ∈ u → e k ⊆ e n → pair n m ∈ u

end DomainTheory.DataTypesAsLattices
```

2

IsGraph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

class IsGraph (u : Pomega) : Prop where
  out : ∀ {{k m n}}, pair k m ∈ u → e k ⊆ e n → pair n m ∈ u

end DomainTheory.DataTypesAsLattices
```

3

IsGraph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

class IsGraph (u : Pomega) : Prop where
```

```
  out : ∀ {{k m n}}, pair k m ∈ u → e k ⊆ e n → pair n m ∈ u

end DomainTheory.DataTypesAsLattices
```

4

IsGraph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

class IsGraph (u : Pomega) : Prop where
  out : ∀ {{k m n}}, pair k m ∈ u → e k ⊆ e n → pair n m ∈ u

end DomainTheory.DataTypesAsLattices
```

5

IsGraph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

class IsGraph (u : Pomega) : Prop where
  out : ∀ {{k m n}}, pair k m ∈ u → e k ⊆ e n → pair n m ∈ u

end DomainTheory.DataTypesAsLattices
```

6

IsGraph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
```

```
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

class IsGraph (u : Pomega) : Prop where
  out : ∀ {{k m n}}, pair k m ∈ u → e k ⊆ e n → pair n m ∈ u

end DomainTheory.DataTypesAsLattices
```

7

IsGraph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

class IsGraph (u : Pomega) : Prop where
  out : ∀ {{k m n}}, pair k m ∈ u → e k ⊆ e n → pair n m ∈ u

end DomainTheory.DataTypesAsLattices
```

8

IsGraph.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.pair
public import DomainTheory.DataTypesAsLattices.Pomega.e
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

class IsGraph (u : Pomega) : Prop where
  out : ∀ {{k m n}}, pair k m ∈ u → e k ⊆ e n → pair n m ∈ u
```

```
end DomainTheory.DataTypesAsLattices
```

9

theorem_1_2.lean

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Graph.funOf
public import DomainTheory.DataTypesAsLattices.Graph.IsGraph
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Graph.mem_graph

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_2.i {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    funOf (graph f) = f := by
  funext x
  ext m
  constructor
  · intro ⟨n, hn, hp⟩
    obtain ⟨n', m', heq, hm'⟩ := hp
    obtain ⟨rfl, rfl⟩ := pair_inj heq
    exact IsScottContinuous.monotone hf hn hm'
  · intro hm
    have : m ∈ scottUnion f x := by
      rw [← hf.out x]; exact hm
    obtain ⟨n, hn, hmn⟩ := mem_scottUnion.mp this
    exact ⟨n, hn, ⟨n, m, rfl, hmn⟩⟩

theorem theorem_1_2.ii (u : Pomega) : u ⊆ graph (funOf u) := by
  intro p hp
  obtain ⟨n, m, rfl⟩ := exists_pair p
  exact ⟨n, m, rfl, ⟨n, subset_rfl, hp⟩⟩

theorem theorem_1_2.iii (u : Pomega) :
    graph (funOf u) = u ↔ IsGraph u := by
  constructor
  · intro heqGraph
    constructor
    intro k m n hkm hkn
    have hmem : pair k m ∈ graph (funOf u) := heqGraph.symm ▶ hkm
    rcases mem_graph.mp hmem with ⟨k', m', hp, hmfun⟩
    have hk : k = k' := (pair_inj hp).1
    have hm : m = m' := (pair_inj hp).2
    have hmfun' : m ∈ funOf u (e k) := by
      rw [hk, hm]; exact hmfun
    rcases hmfun' with ⟨j, hj, hpj⟩
    have hgraph : pair n m ∈ graph (funOf u) :=
      mem_graph.mpr ⟨n, m, rfl, ⟨j, subset_trans hj hkn, hpj⟩⟩
    exact heqGraph ▶ hgraph
  · intro hu
    apply subset_antisymm
```

```
    · intro p hp
      rcases hp with ⟨n, m, rfl, ⟨k, hk, hkm⟩⟩
      exact hu.out hkm hk
    · exact theorem_1_2.ii u

theorem theorem_1_2 {f : Pomega → Pomega} (hf : IsScottContinuous f) (u : Pomega) :
    funOf (graph f) = f ∧ u ⊆ graph (funOf u) ∧
      (graph (funOf u) = u ↔ IsGraph u) :=
  ⟨theorem_1_2.i hf, theorem_1_2.ii u, theorem_1_2.iii u⟩

end DomainTheory.DataTypesAsLattices
```

0

theorem_1_2.lean

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Graph.funOf
public import DomainTheory.DataTypesAsLattices.Graph.IsGraph
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Graph.mem_graph

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_2.i {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    funOf (graph f) = f := by
  funext x
  ext m
  constructor
  · intro ⟨n, hn, hp⟩
    obtain ⟨n', m', heq, hm'⟩ := hp
    obtain ⟨rfl, rfl⟩ := pair_inj heq
    exact IsScottContinuous.monotone hf hn hm'
  · intro hm
    have : m ∈ scottUnion f x := by
      rw [← hf.out x]; exact hm
    obtain ⟨n, hn, hmn⟩ := mem_scottUnion.mp this
    exact ⟨n, hn, ⟨n, m, rfl, hmn⟩⟩

theorem theorem_1_2.ii (u : Pomega) : u ⊆ graph (funOf u) := by
  intro p hp
  obtain ⟨n, m, rfl⟩ := exists_pair p
  exact ⟨n, m, rfl, ⟨n, subset_rfl, hp⟩⟩

theorem theorem_1_2.iii (u : Pomega) :
    graph (funOf u) = u ↔ IsGraph u := by
  constructor
  · intro heqGraph
    constructor
    intro k m n hkm hkn
    have hmem : pair k m ∈ graph (funOf u) := heqGraph.symm ▸ hkm
    rcases mem_graph.mp hmem with ⟨k', m', hp, hmfun⟩
```

```
    have hk : k = k' := (pair_inj hp).1
    have hm : m = m' := (pair_inj hp).2
    have hmfun' : m ∈ funOf u (e k) := by
      rw [hk, hm]; exact hmfun
    rcases hmfun' with ⟨j, hj, hpj⟩
    have hgraph : pair n m ∈ graph (funOf u) :=
      mem_graph.mpr ⟨n, m, rfl, ⟨j, subset_trans hj hkn, hpj⟩⟩
    exact heqGraph ▸ hgraph
  · intro hu
    apply subset_antisymm
    · intro p hp
      rcases hp with ⟨n, m, rfl, ⟨k, hk, hkm⟩⟩
      exact hu.out hkm hk
    · exact theorem_1_2.ii u

theorem theorem_1_2 {f : Pomega → Pomega} (hf : IsScottContinuous f) (u : Pomega) :
    funOf (graph f) = f ∧ u ⊆ graph (funOf u) ∧
      (graph (funOf u) = u ↔ IsGraph u) :=
  ⟨theorem_1_2.i hf, theorem_1_2.ii u, theorem_1_2.iii u⟩

end DomainTheory.DataTypesAsLattices
```

1

theorem_1_2.lean

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Graph.funOf
public import DomainTheory.DataTypesAsLattices.Graph.IsGraph
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Graph.mem_graph

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_2.i {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    funOf (graph f) = f := by
  funext x
  ext m
  constructor
  · intro ⟨n, hn, hp⟩
    obtain ⟨n', m', heq, hm'⟩ := hp
    obtain ⟨rfl, rfl⟩ := pair_inj heq
    exact IsScottContinuous.monotone hf hn hm'
  · intro hm
    have : m ∈ scottUnion f x := by
      rw [← hf.out x]; exact hm
    obtain ⟨n, hn, hmn⟩ := mem_scottUnion.mp this
    exact ⟨n, hn, ⟨n, m, rfl, hmn⟩⟩

theorem theorem_1_2.ii (u : Pomega) : u ⊆ graph (funOf u) := by
  intro p hp
  obtain ⟨n, m, rfl⟩ := exists_pair p
```

```
  exact ⟨n, m, rfl, ⟨n, subset_rfl, hp⟩⟩

theorem theorem_1_2.iii (u : Pomega) :
    graph (funOf u) = u ↔ IsGraph u := by
  constructor
  · intro heqGraph
    constructor
    intro k m n hkm hkn
    have hmem : pair k m ∈ graph (funOf u) := heqGraph.symm ▶ hkm
    rcases mem_graph.mp hmem with ⟨k', m', hp, hmfun⟩
    have hk : k = k' := (pair_inj hp).1
    have hm : m = m' := (pair_inj hp).2
    have hmfun' : m ∈ funOf u (e k) := by
      rw [hk, hm]; exact hmfun
    rcases hmfun' with ⟨j, hj, hpj⟩
    have hgraph : pair n m ∈ graph (funOf u) :=
      mem_graph.mpr ⟨n, m, rfl, ⟨j, subset_trans hj hkn, hpj⟩⟩
    exact heqGraph ▶ hgraph
  · intro hu
    apply subset_antisymm
    · intro p hp
      rcases hp with ⟨n, m, rfl, ⟨k, hk, hkm⟩⟩
      exact hu.out hkm hk
    · exact theorem_1_2.ii u

theorem theorem_1_2 {f : Pomega → Pomega} (hf : IsScottContinuous f) (u : Pomega) :
    funOf (graph f) = f ∧ u ⊆ graph (funOf u) ∧
      (graph (funOf u) = u ↔ IsGraph u) :=
  ⟨theorem_1_2.i hf, theorem_1_2.ii u, theorem_1_2.iii u⟩

end DomainTheory.DataTypesAsLattices
```

2

theorem_1_2.lean

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Graph.funOf
public import DomainTheory.DataTypesAsLattices.Graph.IsGraph
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Graph.mem_graph

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_2.i {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    funOf (graph f) = f := by
  funext x
  ext m
  constructor
  · intro ⟨n, hn, hp⟩
    obtain ⟨n', m', heq, hm'⟩ := hp
    obtain ⟨rfl, rfl⟩ := pair_inj heq
```

```
    exact IsScottContinuous.monotone hf hn hm'
  · intro hm
    have : m ∈ scottUnion f x := by
      rw [← hf.out x]; exact hm
    obtain ⟨n, hn, hmn⟩ := mem_scottUnion.mp this
    exact ⟨n, hn, ⟨n, m, rfl, hmn⟩⟩

theorem theorem_1_2.ii (u : Pomega) : u ⊆ graph (funOf u) := by
  intro p hp
  obtain ⟨n, m, rfl⟩ := exists_pair p
  exact ⟨n, m, rfl, ⟨n, subset_rfl, hp⟩⟩

theorem theorem_1_2.iii (u : Pomega) :
    graph (funOf u) = u ↔ IsGraph u := by
  constructor
  · intro heqGraph
    constructor
    intro k m n hkm hkn
    have hmem : pair k m ∈ graph (funOf u) := heqGraph.symm ▸ hkm
    rcases mem_graph.mp hmem with ⟨k', m', hp, hmfun⟩
    have hk : k = k' := (pair_inj hp).1
    have hm : m = m' := (pair_inj hp).2
    have hmfun' : m ∈ funOf u (e k) := by
      rw [hk, hm]; exact hmfun
    rcases hmfun' with ⟨j, hj, hpj⟩
    have hgraph : pair n m ∈ graph (funOf u) :=
      mem_graph.mpr ⟨n, m, rfl, ⟨j, subset_trans hj hkn, hpj⟩⟩
    exact heqGraph ▸ hgraph
  · intro hu
    apply subset_antisymm
    · intro p hp
      rcases hp with ⟨n, m, rfl, ⟨k, hk, hkm⟩⟩
      exact hu.out hkm hk
    · exact theorem_1_2.ii u

theorem theorem_1_2 {f : Pomega → Pomega} (hf : IsScottContinuous f) (u : Pomega) :
    funOf (graph f) = f ∧ u ⊆ graph (funOf u) ∧
      (graph (funOf u) = u ↔ IsGraph u) :=
  ⟨theorem_1_2.i hf, theorem_1_2.ii u, theorem_1_2.iii u⟩

end DomainTheory.DataTypesAsLattices
```

3

theorem_1_2.lean

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Graph.funOf
public import DomainTheory.DataTypesAsLattices.Graph.IsGraph
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Graph.mem_graph

@[expose] public section
```

```
namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_2.i {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    funOf (graph f) = f := by
  funext x
  ext m
  constructor
  · intro ⟨n, hn, hp⟩
    obtain ⟨n', m', heq, hm'⟩ := hp
    obtain ⟨rfl, rfl⟩ := pair_inj heq
    exact IsScottContinuous.monotone hf hn hm'
  · intro hm
    have : m ∈ scottUnion f x := by
      rw [← hf.out x]; exact hm
    obtain ⟨n, hn, hmn⟩ := mem_scottUnion.mp this
    exact ⟨n, hn, ⟨n, m, rfl, hmn⟩⟩

theorem theorem_1_2.ii (u : Pomega) : u ⊆ graph (funOf u) := by
  intro p hp
  obtain ⟨n, m, rfl⟩ := exists_pair p
  exact ⟨n, m, rfl, ⟨n, subset_rfl, hp⟩⟩

theorem theorem_1_2.iii (u : Pomega) :
    graph (funOf u) = u ↔ IsGraph u := by
  constructor
  · intro heqGraph
    constructor
    intro k m n hkm hkn
    have hmem : pair k m ∈ graph (funOf u) := heqGraph.symm ▸ hkm
    rcases mem_graph.mp hmem with ⟨k', m', hp, hmfun⟩
    have hk : k = k' := (pair_inj hp).1
    have hm : m = m' := (pair_inj hp).2
    have hmfun' : m ∈ funOf u (e k) := by
      rw [hk, hm]; exact hmfun
    rcases hmfun' with ⟨j, hj, hpj⟩
    have hgraph : pair n m ∈ graph (funOf u) :=
      mem_graph.mpr ⟨n, m, rfl, ⟨j, subset_trans hj hkn, hpj⟩⟩
    exact heqGraph ▸ hgraph
  · intro hu
    apply subset_antisymm
    · intro p hp
      rcases hp with ⟨n, m, rfl, ⟨k, hk, hkm⟩⟩
      exact hu.out hkm hk
    · exact theorem_1_2.ii u

theorem theorem_1_2 {f : Pomega → Pomega} (hf : IsScottContinuous f) (u : Pomega) :
    funOf (graph f) = f ∧ u ⊆ graph (funOf u) ∧
      (graph (funOf u) = u ↔ IsGraph u) :=
  ⟨theorem_1_2.i hf, theorem_1_2.ii u, theorem_1_2.iii u⟩

end DomainTheory.DataTypesAsLattices
```

4

theorem_1_2.lean

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Graph.funOf
public import DomainTheory.DataTypesAsLattices.Graph.IsGraph
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Graph.mem_graph

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_2.i {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    funOf (graph f) = f := by
  funext x
  ext m
  constructor
  · intro ⟨n, hn, hp⟩
    obtain ⟨n', m', heq, hm'⟩ := hp
    obtain ⟨rfl, rfl⟩ := pair_inj heq
    exact IsScottContinuous.monotone hf hn hm'
  · intro hm
    have : m ∈ scottUnion f x := by
      rw [← hf.out x]; exact hm
    obtain ⟨n, hn, hmn⟩ := mem_scottUnion.mp this
    exact ⟨n, hn, ⟨n, m, rfl, hmn⟩⟩

theorem theorem_1_2.ii (u : Pomega) : u ⊆ graph (funOf u) := by
  intro p hp
  obtain ⟨n, m, rfl⟩ := exists_pair p
  exact ⟨n, m, rfl, ⟨n, subset_rfl, hp⟩⟩

theorem theorem_1_2.iii (u : Pomega) :
    graph (funOf u) = u ↔ IsGraph u := by
  constructor
  · intro heqGraph
    constructor
    intro k m n hkm hkn
    have hmem : pair k m ∈ graph (funOf u) := heqGraph.symm ▸ hkm
    rcases mem_graph.mp hmem with ⟨k', m', hp, hmfun⟩
    have hk : k = k' := (pair_inj hp).1
    have hm : m = m' := (pair_inj hp).2
    have hmfun' : m ∈ funOf u (e k) := by
      rw [hk, hm]; exact hmfun
    rcases hmfun' with ⟨j, hj, hpj⟩
    have hgraph : pair n m ∈ graph (funOf u) :=
      mem_graph.mpr ⟨n, m, rfl, ⟨j, subset_trans hj hkn, hpj⟩⟩
    exact heqGraph ▸ hgraph
  · intro hu
    apply subset_antisymm
    · intro p hp
      rcases hp with ⟨n, m, rfl, ⟨k, hk, hkm⟩⟩
      exact hu.out hkm hk
    · exact theorem_1_2.ii u

theorem theorem_1_2 {f : Pomega → Pomega} (hf : IsScottContinuous f) (u : Pomega) :
```

```
    funOf (graph f) = f ∧ u ⊆ graph (funOf u) ∧
      (graph (funOf u) = u ↔ IsGraph u) :=
  ⟨theorem_1_2.i hf, theorem_1_2.ii u, theorem_1_2.iii u⟩

end DomainTheory.DataTypesAsLattices
```

5

theorem_1_2.lean

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Graph.funOf
public import DomainTheory.DataTypesAsLattices.Graph.IsGraph
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Graph.mem_graph

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_2.i {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    funOf (graph f) = f := by
  funext x
  ext m
  constructor
  · intro ⟨n, hn, hp⟩
    obtain ⟨n', m', heq, hm'⟩ := hp
    obtain ⟨rfl, rfl⟩ := pair_inj heq
    exact IsScottContinuous.monotone hf hn hm'
  · intro hm
    have : m ∈ scottUnion f x := by
      rw [← hf.out x]; exact hm
    obtain ⟨n, hn, hmn⟩ := mem_scottUnion.mp this
    exact ⟨n, hn, ⟨n, m, rfl, hmn⟩⟩

theorem theorem_1_2.ii (u : Pomega) : u ⊆ graph (funOf u) := by
  intro p hp
  obtain ⟨n, m, rfl⟩ := exists_pair p
  exact ⟨n, m, rfl, ⟨n, subset_rfl, hp⟩⟩

theorem theorem_1_2.iii (u : Pomega) :
    graph (funOf u) = u ↔ IsGraph u := by
  constructor
  · intro heqGraph
    constructor
    intro k m n hkm hkn
    have hmem : pair k m ∈ graph (funOf u) := heqGraph.symm ▸ hkm
    rcases mem_graph.mp hmem with ⟨k', m', hp, hmfun⟩
    have hk : k = k' := (pair_inj hp).1
    have hm : m = m' := (pair_inj hp).2
    have hmfun' : m ∈ funOf u (e k) := by
      rw [hk, hm]; exact hmfun
    rcases hmfun' with ⟨j, hj, hpj⟩
    have hgraph : pair n m ∈ graph (funOf u) :=
```

```
      mem_graph.mpr ⟨n, m, rfl, ⟨j, subset_trans hj hkn, hpj⟩⟩
    exact heqGraph ▸ hgraph
  · intro hu
    apply subset_antisymm
    · intro p hp
      rcases hp with ⟨n, m, rfl, ⟨k, hk, hkm⟩⟩
      exact hu.out hkm hk
    · exact theorem_1_2.ii u

theorem theorem_1_2 {f : Pomega → Pomega} (hf : IsScottContinuous f) (u : Pomega) :
    funOf (graph f) = f ∧ u ⊆ graph (funOf u) ∧
      (graph (funOf u) = u ↔ IsGraph u) :=
  ⟨theorem_1_2.i hf, theorem_1_2.ii u, theorem_1_2.iii u⟩

end DomainTheory.DataTypesAsLattices
```

6

theorem_1_2.lean

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Graph.funOf
public import DomainTheory.DataTypesAsLattices.Graph.IsGraph
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Graph.mem_graph

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_2.i {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    funOf (graph f) = f := by
  funext x
  ext m
  constructor
  · intro ⟨n, hn, hp⟩
    obtain ⟨n', m', heq, hm'⟩ := hp
    obtain ⟨rfl, rfl⟩ := pair_inj heq
    exact IsScottContinuous.monotone hf hn hm'
  · intro hm
    have : m ∈ scottUnion f x := by
      rw [← hf.out x]; exact hm
    obtain ⟨n, hn, hmn⟩ := mem_scottUnion.mp this
    exact ⟨n, hn, ⟨n, m, rfl, hmn⟩⟩

theorem theorem_1_2.ii (u : Pomega) : u ⊆ graph (funOf u) := by
  intro p hp
  obtain ⟨n, m, rfl⟩ := exists_pair p
  exact ⟨n, m, rfl, ⟨n, subset_rfl, hp⟩⟩

theorem theorem_1_2.iii (u : Pomega) :
    graph (funOf u) = u ↔ IsGraph u := by
  constructor
  · intro heqGraph
```

```
    constructor
    intro k m n hkm hkn
    have hmem : pair k m ∈ graph (funOf u) := heqGraph.symm ▸ hkm
    rcases mem_graph.mp hmem with ⟨k', m', hp, hmfun⟩
    have hk : k = k' := (pair_inj hp).1
    have hm : m = m' := (pair_inj hp).2
    have hmfun' : m ∈ funOf u (e k) := by
      rw [hk, hm]; exact hmfun
    rcases hmfun' with ⟨j, hj, hpj⟩
    have hgraph : pair n m ∈ graph (funOf u) :=
      mem_graph.mpr ⟨n, m, rfl, ⟨j, subset_trans hj hkn, hpj⟩⟩
    exact heqGraph ▸ hgraph
  · intro hu
    apply subset_antisymm
    · intro p hp
      rcases hp with ⟨n, m, rfl, ⟨k, hk, hkm⟩⟩
      exact hu.out hkm hk
    · exact theorem_1_2.ii u

theorem theorem_1_2 {f : Pomega → Pomega} (hf : IsScottContinuous f) (u : Pomega) :
    funOf (graph f) = f ∧ u ⊆ graph (funOf u) ∧
      (graph (funOf u) = u ↔ IsGraph u) :=
  ⟨theorem_1_2.i hf, theorem_1_2.ii u, theorem_1_2.iii u⟩

end DomainTheory.DataTypesAsLattices
```

7

theorem_1_2.lean

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Graph.funOf
public import DomainTheory.DataTypesAsLattices.Graph.IsGraph
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Graph.mem_graph

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_2.i {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    funOf (graph f) = f := by
  funext x
  ext m
  constructor
  · intro ⟨n, hn, hp⟩
    obtain ⟨n', m', heq, hm'⟩ := hp
    obtain ⟨rfl, rfl⟩ := pair_inj heq
    exact IsScottContinuous.monotone hf hn hm'
  · intro hm
    have : m ∈ scottUnion f x := by
      rw [← hf.out x]; exact hm
    obtain ⟨n, hn, hmn⟩ := mem_scottUnion.mp this
    exact ⟨n, hn, ⟨n, m, rfl, hmn⟩⟩
```

```
theorem theorem_1_2.ii (u : Pomega) : u ⊆ graph (funOf u) := by
  intro p hp
  obtain ⟨n, m, rfl⟩ := exists_pair p
  exact ⟨n, m, rfl, ⟨n, subset_rfl, hp⟩⟩

theorem theorem_1_2.iii (u : Pomega) :
    graph (funOf u) = u ↔ IsGraph u := by
  constructor
  · intro heqGraph
    constructor
    intro k m n hkm hkn
    have hmem : pair k m ∈ graph (funOf u) := heqGraph.symm ▶ hkm
    rcases mem_graph.mp hmem with ⟨k', m', hp, hmfun⟩
    have hk : k = k' := (pair_inj hp).1
    have hm : m = m' := (pair_inj hp).2
    have hmfun' : m ∈ funOf u (e k) := by
      rw [hk, hm]; exact hmfun
    rcases hmfun' with ⟨j, hj, hpj⟩
    have hgraph : pair n m ∈ graph (funOf u) :=
      mem_graph.mpr ⟨n, m, rfl, ⟨j, subset_trans hj hkn, hpj⟩⟩
    exact heqGraph ▶ hgraph
  · intro hu
    apply subset_antisymm
    · intro p hp
      rcases hp with ⟨n, m, rfl, ⟨k, hk, hkm⟩⟩
      exact hu.out hkm hk
    · exact theorem_1_2.ii u

theorem theorem_1_2 {f : Pomega → Pomega} (hf : IsScottContinuous f) (u : Pomega) :
    funOf (graph f) = f ∧ u ⊆ graph (funOf u) ∧
      (graph (funOf u) = u ↔ IsGraph u) :=
  ⟨theorem_1_2.i hf, theorem_1_2.ii u, theorem_1_2.iii u⟩

end DomainTheory.DataTypesAsLattices
```

8

theorem_1_2.lean

```
module

public import DomainTheory.DataTypesAsLattices.Graph.graph
public import DomainTheory.DataTypesAsLattices.Graph.funOf
public import DomainTheory.DataTypesAsLattices.Graph.IsGraph
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Graph.mem_graph

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_2.i {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    funOf (graph f) = f := by
  funext x
  ext m
```

```
  constructor
  · intro ⟨n, hn, hp⟩
    obtain ⟨n', m', heq, hm'⟩ := hp
    obtain ⟨rfl, rfl⟩ := pair_inj heq
    exact IsScottContinuous.monotone hf hn hm'
  · intro hm
    have : m ∈ scottUnion f x := by
      rw [← hf.out x]; exact hm
    obtain ⟨n, hn, hmn⟩ := mem_scottUnion.mp this
    exact ⟨n, hn, ⟨n, m, rfl, hmn⟩⟩

theorem theorem_1_2.ii (u : Pomega) : u ⊆ graph (funOf u) := by
  intro p hp
  obtain ⟨n, m, rfl⟩ := exists_pair p
  exact ⟨n, m, rfl, ⟨n, subset_rfl, hp⟩⟩

theorem theorem_1_2.iii (u : Pomega) :
    graph (funOf u) = u ↔ IsGraph u := by
  constructor
  · intro heqGraph
    constructor
    intro k m n hkm hkn
    have hmem : pair k m ∈ graph (funOf u) := heqGraph.symm ▶ hkm
    rcases mem_graph.mp hmem with ⟨k', m', hp, hmfun⟩
    have hk : k = k' := (pair_inj hp).1
    have hm : m = m' := (pair_inj hp).2
    have hmfun' : m ∈ funOf u (e k) := by
      rw [hk, hm]; exact hmfun
    rcases hmfun' with ⟨j, hj, hpj⟩
    have hgraph : pair n m ∈ graph (funOf u) :=
      mem_graph.mpr ⟨n, m, rfl, ⟨j, subset_trans hj hkn, hpj⟩⟩
    exact heqGraph ▶ hgraph
  · intro hu
    apply subset_antisymm
    · intro p hp
      rcases hp with ⟨n, m, rfl, ⟨k, hk, hkm⟩⟩
      exact hu.out hkm hk
    · exact theorem_1_2.ii u

theorem theorem_1_2 {f : Pomega → Pomega} (hf : IsScottContinuous f) (u : Pomega) :
    funOf (graph f) = f ∧ u ⊆ graph (funOf u) ∧
      (graph (funOf u) = u ↔ IsGraph u) :=
  ⟨theorem_1_2.i hf, theorem_1_2.ii u, theorem_1_2.iii u⟩

end DomainTheory.DataTypesAsLattices
```

9

theorem_1_3.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.theorem_1_1
```

```
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_1_3

theorem comp {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (f ∘ g) := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
    have hk' : k ∈ f (g x) := hk
    have := (theorem_1_1 f).mp hf (g x) (2 ^ k)
    have hfin : e (2 ^ k) ⊆ f (g x) := by
      simpa [e.pow2, Set.singleton_subset_iff] using hk'
    obtain ⟨m, hm, hkm⟩ := this.mp hfin
    have := (theorem_1_1 g).mp hg x m
    obtain ⟨n, hn, hmn⟩ := this.mp hm
    refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
    have : e (2 ^ k) ⊆ f (g (e n)) :=
      subset_trans hkm (IsScottContinuous.monotone hf hmn)
    simpa [e.pow2, Set.singleton_subset_iff] using this
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    exact IsScottContinuous.monotone hf (IsScottContinuous.monotone hg hn) hkn

theorem diag {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {x : Pomega} :
    f x x = ⋃ n, {k | e n ⊆ x ∧ k ∈ f (e n) (e n)} := by
  apply subset_antisymm
  · intro k hk
    have : k ∈ scottUnion (fun z => f z x) x := by
      rw [← (hfx x).out x]; exact hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
    have : k ∈ scottUnion (fun y => f (e n) y) x := by
      rw [← (hfy (e n)).out x]; exact hkn
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp this
    refine Set.mem_iUnion.mpr ⟨n ||| m, ?_⟩
    refine ⟨e.or_of_subset hn hm, ?_⟩
    have hle : e n ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_left
    have hre : e m ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_right
    exact IsScottContinuous.monotone (hfy (e (n ||| m))) hre
      (IsScottContinuous.monotone (hfx (e m)) hle hkm)
  · intro k hk
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp hk
    exact IsScottContinuous.monotone (hfy x) hn
      (IsScottContinuous.monotone (hfx (e n)) hn hkn)

theorem tuple {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
```

```
    {g h : Pomega → Pomega} (hg : IsScottContinuous g) (hh : IsScottContinuous h) :
    IsScottContinuous (fun x => f (g x) (h x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h v))
    (fun v => comp (hfx (h v)) hg)
    (fun u => comp (hfy (g u)) hh)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} := by rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

theorem nary {f : Pomega → Pomega → Pomega → Pomega}
    (hf0 : ∀ y z, IsScottContinuous (fun x => f x y z))
    (hf1 : ∀ x z, IsScottContinuous (fun y => f x y z))
    (hf2 : ∀ x y, IsScottContinuous (fun z => f x y z))
    {g h i : Pomega → Pomega}
    (hg : IsScottContinuous g) (hh : IsScottContinuous h) (hi : IsScottContinuous i) :
    IsScottContinuous (fun x => f (g x) (h x) (i x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h u) (i v))
    (fun v => tuple (fun y => hf0 y (i v)) (fun x => hf1 x (i v)) hg hh)
    (fun u => comp (hf2 (g u) (h u)) hi)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} := by
      rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

end theorem_1_3

/-- Scott Theorem 1.3 (unary composition case). -/
theorem theorem_1_3 {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (fun x => f (g x)) :=
  theorem_1_3.comp hf hg

end DomainTheory.DataTypesAsLattices
```

theorem_1_3.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.theorem_1_1

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_1_3

theorem comp {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (f ∘ g) := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
    have hk' : k ∈ f (g x) := hk
    have := (theorem_1_1 f).mp hf (g x) (2 ^ k)
    have hfin : e (2 ^ k) ⊆ f (g x) := by
      simpa [e.pow2, Set.singleton_subset_iff] using hk'
    obtain ⟨m, hm, hkm⟩ := this.mp hfin
    have := (theorem_1_1 g).mp hg x m
    obtain ⟨n, hn, hmn⟩ := this.mp hm
    refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
    have : e (2 ^ k) ⊆ f (g (e n)) :=
      subset_trans hkm (IsScottContinuous.monotone hf hmn)
    simpa [e.pow2, Set.singleton_subset_iff] using this
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    exact IsScottContinuous.monotone hf (IsScottContinuous.monotone hg hn) hkn

theorem diag {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {x : Pomega} :
    f x x = ⋃ n, {k | e n ⊆ x ∧ k ∈ f (e n) (e n)} := by
  apply subset_antisymm
  · intro k hk
    have : k ∈ scottUnion (fun z => f z x) x := by
      rw [← (hfx x).out x]; exact hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
    have : k ∈ scottUnion (fun y => f (e n) y) x := by
      rw [← (hfy (e n)).out x]; exact hkn
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp this
    refine Set.mem_iUnion.mpr ⟨n ||| m, ?_⟩
    refine ⟨e.or_of_subset hn hm, ?_⟩
    have hle : e n ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_left
    have hre : e m ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_right
```

```
    exact IsScottContinuous.monotone (hfy (e (n ||| m))) hre
      (IsScottContinuous.monotone (hfx (e m)) hle hkm)
  · intro k hk
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp hk
    exact IsScottContinuous.monotone (hfy x) hn
      (IsScottContinuous.monotone (hfx (e n)) hn hkn)

theorem tuple {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {g h : Pomega → Pomega} (hg : IsScottContinuous g) (hh : IsScottContinuous h) :
    IsScottContinuous (fun x => f (g x) (h x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h v))
    (fun v => comp (hfx (h v)) hg)
    (fun u => comp (hfy (g u)) hh)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} := by rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

theorem nary {f : Pomega → Pomega → Pomega → Pomega}
    (hf0 : ∀ y z, IsScottContinuous (fun x => f x y z))
    (hf1 : ∀ x z, IsScottContinuous (fun y => f x y z))
    (hf2 : ∀ x y, IsScottContinuous (fun z => f x y z))
    {g h i : Pomega → Pomega}
    (hg : IsScottContinuous g) (hh : IsScottContinuous h) (hi : IsScottContinuous i) :
    IsScottContinuous (fun x => f (g x) (h x) (i x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h u) (i v))
    (fun v => tuple (fun y => hf0 y (i v)) (fun x => hf1 x (i v)) hg hh)
    (fun u => comp (hf2 (g u) (h u)) hi)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} := by
      rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this
```

```
end theorem_1_3

/-- Scott Theorem 1.3 (unary composition case). -/
theorem theorem_1_3 {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (fun x => f (g x)) :=
  theorem_1_3.comp hf hg

end DomainTheory.DataTypesAsLattices
```

1

theorem_1_3.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.theorem_1_1

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_1_3

theorem comp {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (f ∘ g) := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
    have hk' : k ∈ f (g x) := hk
    have := (theorem_1_1 f).mp hf (g x) (2 ^ k)
    have hfin : e (2 ^ k) ⊆ f (g x) := by
      simpa [e.pow2, Set.singleton_subset_iff] using hk'
    obtain ⟨m, hm, hkm⟩ := this.mp hfin
    have := (theorem_1_1 g).mp hg x m
    obtain ⟨n, hn, hmn⟩ := this.mp hm
    refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
    have : e (2 ^ k) ⊆ f (g (e n)) :=
      subset_trans hkm (IsScottContinuous.monotone hf hmn)
    simpa [e.pow2, Set.singleton_subset_iff] using this
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    exact IsScottContinuous.monotone hf (IsScottContinuous.monotone hg hn) hkn

theorem diag {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {x : Pomega} :
    f x x = ⋃ n, {k | e n ⊆ x ∧ k ∈ f (e n) (e n)} := by
  apply subset_antisymm
  · intro k hk
```

```
    have : k ∈ scottUnion (fun z => f z x) x := by
      rw [← (hfx x).out x]; exact hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
    have : k ∈ scottUnion (fun y => f (e n) y) x := by
      rw [← (hfy (e n)).out x]; exact hkn
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp this
    refine Set.mem_iUnion.mpr ⟨n ||| m, ?_⟩
    refine ⟨e.or_of_subset hn hm, ?_⟩
    have hle : e n ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_left
    have hre : e m ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_right
    exact IsScottContinuous.monotone (hfy (e (n ||| m))) hre
      (IsScottContinuous.monotone (hfx (e m)) hle hkm)
  · intro k hk
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp hk
    exact IsScottContinuous.monotone (hfy x) hn
      (IsScottContinuous.monotone (hfx (e n)) hn hkn)

theorem tuple {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {g h : Pomega → Pomega} (hg : IsScottContinuous g) (hh : IsScottContinuous h) :
    IsScottContinuous (fun x => f (g x) (h x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h v))
    (fun v => comp (hfx (h v)) hg)
    (fun u => comp (hfy (g u)) hh)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} := by rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

theorem nary {f : Pomega → Pomega → Pomega → Pomega}
    (hf0 : ∀ y z, IsScottContinuous (fun x => f x y z))
    (hf1 : ∀ x z, IsScottContinuous (fun y => f x y z))
    (hf2 : ∀ x y, IsScottContinuous (fun z => f x y z))
    {g h i : Pomega → Pomega}
    (hg : IsScottContinuous g) (hh : IsScottContinuous h) (hi : IsScottContinuous i) :
    IsScottContinuous (fun x => f (g x) (h x) (i x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h u) (i v))
    (fun v => tuple (fun y => hf0 y (i v)) (fun x => hf1 x (i v)) hg hh)
    (fun u => comp (hf2 (g u) (h u)) hi)
  ext k
  constructor
  · intro hk
```

```
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} := by
      rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

end theorem_1_3

/-- Scott Theorem 1.3 (unary composition case). -/
theorem theorem_1_3 {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (fun x => f (g x)) :=
  theorem_1_3.comp hf hg

end DomainTheory.DataTypesAsLattices
```

2

theorem_1_3.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.theorem_1_1

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_1_3

theorem comp {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (f ∘ g) := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
    have hk' : k ∈ f (g x) := hk
    have := (theorem_1_1 f).mp hf (g x) (2 ^ k)
    have hfin : e (2 ^ k) ⊆ f (g x) := by
      simpa [e.pow2, Set.singleton_subset_iff] using hk'
    obtain ⟨m, hm, hkm⟩ := this.mp hfin
    have := (theorem_1_1 g).mp hg x m
    obtain ⟨n, hn, hmn⟩ := this.mp hm
    refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
    have : e (2 ^ k) ⊆ f (g (e n)) :=
      subset_trans hkm (IsScottContinuous.monotone hf hmn)
    simpa [e.pow2, Set.singleton_subset_iff] using this
  · intro hk
```

```
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    exact IsScottContinuous.monotone hf (IsScottContinuous.monotone hg hn) hkn

theorem diag {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {x : Pomega} :
    f x x = ⋃ n, {k | e n ⊆ x ∧ k ∈ f (e n) (e n)} := by
  apply subset_antisymm
  · intro k hk
    have : k ∈ scottUnion (fun z => f z x) x := by
      rw [← (hfx x).out x]; exact hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
    have : k ∈ scottUnion (fun y => f (e n) y) x := by
      rw [← (hfy (e n)).out x]; exact hkn
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp this
    refine Set.mem_iUnion.mpr ⟨n ||| m, ?_⟩
    refine ⟨e.or_of_subset hn hm, ?_⟩
    have hle : e n ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_left
    have hre : e m ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_right
    exact IsScottContinuous.monotone (hfy (e (n ||| m))) hre
      (IsScottContinuous.monotone (hfx (e m)) hle hkm)
  · intro k hk
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp hk
    exact IsScottContinuous.monotone (hfy x) hn
      (IsScottContinuous.monotone (hfx (e n)) hn hkn)

theorem tuple {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {g h : Pomega → Pomega} (hg : IsScottContinuous g) (hh : IsScottContinuous h) :
    IsScottContinuous (fun x => f (g x) (h x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h v))
    (fun v => comp (hfx (h v)) hg)
    (fun u => comp (hfy (g u)) hh)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} := by rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

theorem nary {f : Pomega → Pomega → Pomega → Pomega}
    (hf0 : ∀ y z, IsScottContinuous (fun x => f x y z))
    (hf1 : ∀ x z, IsScottContinuous (fun y => f x y z))
    (hf2 : ∀ x y, IsScottContinuous (fun z => f x y z))
    {g h i : Pomega → Pomega}
    (hg : IsScottContinuous g) (hh : IsScottContinuous h) (hi : IsScottContinuous i) :
```

```
    IsScottContinuous (fun x => f (g x) (h x) (i x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h u) (i v))
    (fun v => tuple (fun y => hf0 y (i v)) (fun x => hf1 x (i v)) hg hh)
    (fun u => comp (hf2 (g u) (h u)) hi)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} := by
      rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

end theorem_1_3

/-- Scott Theorem 1.3 (unary composition case). -/
theorem theorem_1_3 {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (fun x => f (g x)) :=
  theorem_1_3.comp hf hg

end DomainTheory.DataTypesAsLattices
```

3

theorem_1_3.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.theorem_1_1

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_1_3

theorem comp {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (f ∘ g) := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
    have hk' : k ∈ f (g x) := hk
    have := (theorem_1_1 f).mp hf (g x) (2 ^ k)
```

```
    have hfin : e (2 ^ k) ⊆ f (g x) := by
      simpa [e.pow2, Set.singleton_subset_iff] using hk'
    obtain ⟨m, hm, hkm⟩ := this.mp hfin
    have := (theorem_1_1 g).mp hg x m
    obtain ⟨n, hn, hmn⟩ := this.mp hm
    refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
    have : e (2 ^ k) ⊆ f (g (e n)) :=
      subset_trans hkm (IsScottContinuous.monotone hf hmn)
    simpa [e.pow2, Set.singleton_subset_iff] using this
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    exact IsScottContinuous.monotone hf (IsScottContinuous.monotone hg hn) hkn

theorem diag {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {x : Pomega} :
    f x x = ⋃ n, {k | e n ⊆ x ∧ k ∈ f (e n) (e n)} := by
  apply subset_antisymm
  · intro k hk
    have : k ∈ scottUnion (fun z => f z x) x := by
      rw [← (hfx x).out x]; exact hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
    have : k ∈ scottUnion (fun y => f (e n) y) x := by
      rw [← (hfy (e n)).out x]; exact hkn
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp this
    refine Set.mem_iUnion.mpr ⟨n ||| m, ?_⟩
    refine ⟨e.or_of_subset hn hm, ?_⟩
    have hle : e n ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_left
    have hre : e m ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_right
    exact IsScottContinuous.monotone (hfy (e (n ||| m))) hre
      (IsScottContinuous.monotone (hfx (e m)) hle hkm)
  · intro k hk
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp hk
    exact IsScottContinuous.monotone (hfy x) hn
      (IsScottContinuous.monotone (hfx (e n)) hn hkn)

theorem tuple {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {g h : Pomega → Pomega} (hg : IsScottContinuous g) (hh : IsScottContinuous h) :
    IsScottContinuous (fun x => f (g x) (h x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h v))
    (fun v => comp (hfx (h v)) hg)
    (fun u => comp (hfy (g u)) hh)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} := by rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
```

```
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

theorem nary {f : Pomega → Pomega → Pomega → Pomega}
    (hf0 : ∀ y z, IsScottContinuous (fun x => f x y z))
    (hf1 : ∀ x z, IsScottContinuous (fun y => f x y z))
    (hf2 : ∀ x y, IsScottContinuous (fun z => f x y z))
    {g h i : Pomega → Pomega}
    (hg : IsScottContinuous g) (hh : IsScottContinuous h) (hi : IsScottContinuous i) :
    IsScottContinuous (fun x => f (g x) (h x) (i x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h u) (i v))
    (fun v => tuple (fun y => hf0 y (i v)) (fun x => hf1 x (i v)) hg hh)
    (fun u => comp (hf2 (g u) (h u)) hi)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} := by
      rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

end theorem_1_3

/-- Scott Theorem 1.3 (unary composition case). -/
theorem theorem_1_3 {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (fun x => f (g x)) :=
  theorem_1_3.comp hf hg

end DomainTheory.DataTypesAsLattices
```

4

theorem_1_3.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.theorem_1_1

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_1_3
```

```
theorem comp {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (f ∘ g) := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
    have hk' : k ∈ f (g x) := hk
    have := (theorem_1_1 f).mp hf (g x) (2 ^ k)
    have hfin : e (2 ^ k) ⊆ f (g x) := by
      simpa [e.pow2, Set.singleton_subset_iff] using hk'
    obtain ⟨m, hm, hkm⟩ := this.mp hfin
    have := (theorem_1_1 g).mp hg x m
    obtain ⟨n, hn, hmn⟩ := this.mp hm
    refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
    have : e (2 ^ k) ⊆ f (g (e n)) :=
      subset_trans hkm (IsScottContinuous.monotone hf hmn)
    simpa [e.pow2, Set.singleton_subset_iff] using this
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    exact IsScottContinuous.monotone hf (IsScottContinuous.monotone hg hn) hkn

theorem diag {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {x : Pomega} :
    f x x = ⋃ n, {k | e n ⊆ x ∧ k ∈ f (e n) (e n)} := by
  apply subset_antisymm
  · intro k hk
    have : k ∈ scottUnion (fun z => f z x) x := by
      rw [← (hfx x).out x]; exact hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
    have : k ∈ scottUnion (fun y => f (e n) y) x := by
      rw [← (hfy (e n)).out x]; exact hkn
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp this
    refine Set.mem_iUnion.mpr ⟨n ||| m, ?_⟩
    refine ⟨e.or_of_subset hn hm, ?_⟩
    have hle : e n ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_left
    have hre : e m ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_right
    exact IsScottContinuous.monotone (hfy (e (n ||| m))) hre
      (IsScottContinuous.monotone (hfx (e m)) hle hkm)
  · intro k hk
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp hk
    exact IsScottContinuous.monotone (hfy x) hn
      (IsScottContinuous.monotone (hfx (e n)) hn hkn)

theorem tuple {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {g h : Pomega → Pomega} (hg : IsScottContinuous g) (hh : IsScottContinuous h) :
    IsScottContinuous (fun x => f (g x) (h x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h v))
```

```
    (fun v => comp (hfx (h v)) hg)
    (fun u => comp (hfy (g u)) hh)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} := by rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

theorem nary {f : Pomega → Pomega → Pomega → Pomega}
    (hf0 : ∀ y z, IsScottContinuous (fun x => f x y z))
    (hf1 : ∀ x z, IsScottContinuous (fun y => f x y z))
    (hf2 : ∀ x y, IsScottContinuous (fun z => f x y z))
    {g h i : Pomega → Pomega}
    (hg : IsScottContinuous g) (hh : IsScottContinuous h) (hi : IsScottContinuous i) :
    IsScottContinuous (fun x => f (g x) (h x) (i x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h u) (i v))
    (fun v => tuple (fun y => hf0 y (i v)) (fun x => hf1 x (i v)) hg hh)
    (fun u => comp (hf2 (g u) (h u)) hi)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} := by
      rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

end theorem_1_3

/-- Scott Theorem 1.3 (unary composition case). -/
theorem theorem_1_3 {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (fun x => f (g x)) :=
  theorem_1_3.comp hf hg

end DomainTheory.DataTypesAsLattices
```

5

theorem_1_3.lean

```
module
```

```
public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.theorem_1_1

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_1_3

theorem comp {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (f ∘ g) := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
    have hk' : k ∈ f (g x) := hk
    have := (theorem_1_1 f).mp hf (g x) (2 ^ k)
    have hfin : e (2 ^ k) ⊆ f (g x) := by
      simpa [e.pow2, Set.singleton_subset_iff] using hk'
    obtain ⟨m, hm, hkm⟩ := this.mp hfin
    have := (theorem_1_1 g).mp hg x m
    obtain ⟨n, hn, hmn⟩ := this.mp hm
    refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
    have : e (2 ^ k) ⊆ f (g (e n)) :=
      subset_trans hkm (IsScottContinuous.monotone hf hmn)
    simpa [e.pow2, Set.singleton_subset_iff] using this
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    exact IsScottContinuous.monotone hf (IsScottContinuous.monotone hg hn) hkn

theorem diag {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {x : Pomega} :
    f x x = ⋃ n, {k | e n ⊆ x ∧ k ∈ f (e n) (e n)} := by
  apply subset_antisymm
  · intro k hk
    have : k ∈ scottUnion (fun z => f z x) x := by
      rw [← (hfx x).out x]; exact hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
    have : k ∈ scottUnion (fun y => f (e n) y) x := by
      rw [← (hfy (e n)).out x]; exact hkn
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp this
    refine Set.mem_iUnion.mpr ⟨n ||| m, ?_⟩
    refine ⟨e.or_of_subset hn hm, ?_⟩
    have hle : e n ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_left
    have hre : e m ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_right
    exact IsScottContinuous.monotone (hfy (e (n ||| m))) hre
      (IsScottContinuous.monotone (hfx (e m)) hle hkm)
  · intro k hk
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp hk
    exact IsScottContinuous.monotone (hfy x) hn
      (IsScottContinuous.monotone (hfx (e n)) hn hkn)
```

```
theorem tuple {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {g h : Pomega → Pomega} (hg : IsScottContinuous g) (hh : IsScottContinuous h) :
    IsScottContinuous (fun x => f (g x) (h x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h v))
    (fun v => comp (hfx (h v)) hg)
    (fun u => comp (hfy (g u)) hh)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} := by rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

theorem nary {f : Pomega → Pomega → Pomega → Pomega}
    (hf0 : ∀ y z, IsScottContinuous (fun x => f x y z))
    (hf1 : ∀ x z, IsScottContinuous (fun y => f x y z))
    (hf2 : ∀ x y, IsScottContinuous (fun z => f x y z))
    {g h i : Pomega → Pomega}
    (hg : IsScottContinuous g) (hh : IsScottContinuous h) (hi : IsScottContinuous i) :
    IsScottContinuous (fun x => f (g x) (h x) (i x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h u) (i v))
    (fun v => tuple (fun y => hf0 y (i v)) (fun x => hf1 x (i v)) hg hh)
    (fun u => comp (hf2 (g u) (h u)) hi)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} := by
      rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

end theorem_1_3

/-- Scott Theorem 1.3 (unary composition case). -/
theorem theorem_1_3 {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (fun x => f (g x)) :=
```

```
  theorem_1_3.comp hf hg

end DomainTheory.DataTypesAsLattices
```

6

theorem_1_3.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.theorem_1_1

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_1_3

theorem comp {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (f ∘ g) := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
    have hk' : k ∈ f (g x) := hk
    have := (theorem_1_1 f).mp hf (g x) (2 ^ k)
    have hfin : e (2 ^ k) ⊆ f (g x) := by
      simpa [e.pow2, Set.singleton_subset_iff] using hk'
    obtain ⟨m, hm, hkm⟩ := this.mp hfin
    have := (theorem_1_1 g).mp hg x m
    obtain ⟨n, hn, hmn⟩ := this.mp hm
    refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
    have : e (2 ^ k) ⊆ f (g (e n)) :=
      subset_trans hkm (IsScottContinuous.monotone hf hmn)
    simpa [e.pow2, Set.singleton_subset_iff] using this
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    exact IsScottContinuous.monotone hf (IsScottContinuous.monotone hg hn) hkn

theorem diag {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {x : Pomega} :
    f x x = ⋃ n, {k | e n ⊆ x ∧ k ∈ f (e n) (e n)} := by
  apply subset_antisymm
  · intro k hk
    have : k ∈ scottUnion (fun z => f z x) x := by
      rw [← (hfx x).out x]; exact hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
    have : k ∈ scottUnion (fun y => f (e n) y) x := by
      rw [← (hfy (e n)).out x]; exact hkn
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp this
```

```
    refine Set.mem_iUnion.mpr ⟨n ||| m, ?_⟩
    refine ⟨e.or_of_subset hn hm, ?_⟩
    have hle : e n ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_left
    have hre : e m ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_right
    exact IsScottContinuous.monotone (hfy (e (n ||| m))) hre
      (IsScottContinuous.monotone (hfx (e m)) hle hkm)
  · intro k hk
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp hk
    exact IsScottContinuous.monotone (hfy x) hn
      (IsScottContinuous.monotone (hfx (e n)) hn hkn)

theorem tuple {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {g h : Pomega → Pomega} (hg : IsScottContinuous g) (hh : IsScottContinuous h) :
    IsScottContinuous (fun x => f (g x) (h x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h v))
    (fun v => comp (hfx (h v)) hg)
    (fun u => comp (hfy (g u)) hh)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} := by rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

theorem nary {f : Pomega → Pomega → Pomega → Pomega}
    (hf0 : ∀ y z, IsScottContinuous (fun x => f x y z))
    (hf1 : ∀ x z, IsScottContinuous (fun y => f x y z))
    (hf2 : ∀ x y, IsScottContinuous (fun z => f x y z))
    {g h i : Pomega → Pomega}
    (hg : IsScottContinuous g) (hh : IsScottContinuous h) (hi : IsScottContinuous i) :
    IsScottContinuous (fun x => f (g x) (h x) (i x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h u) (i v))
    (fun v => tuple (fun y => hf0 y (i v)) (fun x => hf1 x (i v)) hg hh)
    (fun u => comp (hf2 (g u) (h u)) hi)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} := by
      rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
```

```
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

end theorem_1_3

/-- Scott Theorem 1.3 (unary composition case). -/
theorem theorem_1_3 {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (fun x => f (g x)) :=
  theorem_1_3.comp hf hg

end DomainTheory.DataTypesAsLattices
```

7

theorem_1_3.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.theorem_1_1

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_1_3

theorem comp {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (f ∘ g) := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
    have hk' : k ∈ f (g x) := hk
    have := (theorem_1_1 f).mp hf (g x) (2 ^ k)
    have hfin : e (2 ^ k) ⊆ f (g x) := by
      simpa [e.pow2, Set.singleton_subset_iff] using hk'
    obtain ⟨m, hm, hkm⟩ := this.mp hfin
    have := (theorem_1_1 g).mp hg x m
    obtain ⟨n, hn, hmn⟩ := this.mp hm
    refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
    have : e (2 ^ k) ⊆ f (g (e n)) :=
      subset_trans hkm (IsScottContinuous.monotone hf hmn)
    simpa [e.pow2, Set.singleton_subset_iff] using this
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    exact IsScottContinuous.monotone hf (IsScottContinuous.monotone hg hn) hkn

theorem diag {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
```

```
    {x : Pomega} :
    f x x = ⋃ n, {k | e n ⊆ x ∧ k ∈ f (e n) (e n)} := by
  apply subset_antisymm
  · intro k hk
    have : k ∈ scottUnion (fun z => f z x) x := by
      rw [← (hfx x).out x]; exact hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
    have : k ∈ scottUnion (fun y => f (e n) y) x := by
      rw [← (hfy (e n)).out x]; exact hkn
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp this
    refine Set.mem_iUnion.mpr ⟨n ||| m, ?_⟩
    refine ⟨e.or_of_subset hn hm, ?_⟩
    have hle : e n ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_left
    have hre : e m ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_right
    exact IsScottContinuous.monotone (hfy (e (n ||| m))) hre
      (IsScottContinuous.monotone (hfx (e m)) hle hkm)
  · intro k hk
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp hk
    exact IsScottContinuous.monotone (hfy x) hn
      (IsScottContinuous.monotone (hfx (e n)) hn hkn)

theorem tuple {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {g h : Pomega → Pomega} (hg : IsScottContinuous g) (hh : IsScottContinuous h) :
    IsScottContinuous (fun x => f (g x) (h x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h v))
    (fun v => comp (hfx (h v)) hg)
    (fun u => comp (hfy (g u)) hh)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} := by rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

theorem nary {f : Pomega → Pomega → Pomega → Pomega}
    (hf0 : ∀ y z, IsScottContinuous (fun x => f x y z))
    (hf1 : ∀ x z, IsScottContinuous (fun y => f x y z))
    (hf2 : ∀ x y, IsScottContinuous (fun z => f x y z))
    {g h i : Pomega → Pomega}
    (hg : IsScottContinuous g) (hh : IsScottContinuous h) (hi : IsScottContinuous i) :
    IsScottContinuous (fun x => f (g x) (h x) (i x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h u) (i v))
    (fun v => tuple (fun y => hf0 y (i v)) (fun x => hf1 x (i v)) hg hh)
```

```
    (fun u => comp (hf2 (g u) (h u)) hi)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} := by
      rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

end theorem_1_3

/-- Scott Theorem 1.3 (unary composition case). -/
theorem theorem_1_3 {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (fun x => f (g x)) :=
  theorem_1_3.comp hf hg

end DomainTheory.DataTypesAsLattices
```

8

theorem_1_3.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.IsScottContinuous
import DomainTheory.DataTypesAsLattices.Continuous.mem_scottUnion
import DomainTheory.DataTypesAsLattices.Continuous.theorem_1_1

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace theorem_1_3

theorem comp {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (f ∘ g) := by
  constructor
  intro x
  ext k
  constructor
  · intro hk
    have hk' : k ∈ f (g x) := hk
    have := (theorem_1_1 f).mp hf (g x) (2 ^ k)
    have hfin : e (2 ^ k) ⊆ f (g x) := by
      simpa [e.pow2, Set.singleton_subset_iff] using hk'
    obtain ⟨m, hm, hkm⟩ := this.mp hfin
    have := (theorem_1_1 g).mp hg x m
    obtain ⟨n, hn, hmn⟩ := this.mp hm
    refine mem_scottUnion.mpr ⟨n, hn, ?_⟩
```

```
    have : e (2 ^ k) ⊆ f (g (e n)) :=
      subset_trans hkm (IsScottContinuous.monotone hf hmn)
    simpa [e.pow2, Set.singleton_subset_iff] using this
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    exact IsScottContinuous.monotone hf (IsScottContinuous.monotone hg hn) hkn

theorem diag {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {x : Pomega} :
    f x x = ⋃ n, {k | e n ⊆ x ∧ k ∈ f (e n) (e n)} := by
  apply subset_antisymm
  · intro k hk
    have : k ∈ scottUnion (fun z => f z x) x := by
      rw [← (hfx x).out x]; exact hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp this
    have : k ∈ scottUnion (fun y => f (e n) y) x := by
      rw [← (hfy (e n)).out x]; exact hkn
    obtain ⟨m, hm, hkm⟩ := mem_scottUnion.mp this
    refine Set.mem_iUnion.mpr ⟨n ||| m, ?_⟩
    refine ⟨e.or_of_subset hn hm, ?_⟩
    have hle : e n ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_left
    have hre : e m ⊆ e (n ||| m) := by rw [e.or]; exact Set.subset_union_right
    exact IsScottContinuous.monotone (hfy (e (n ||| m))) hre
      (IsScottContinuous.monotone (hfx (e m)) hle hkm)
  · intro k hk
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp hk
    exact IsScottContinuous.monotone (hfy x) hn
      (IsScottContinuous.monotone (hfx (e n)) hn hkn)

theorem tuple {f : Pomega → Pomega → Pomega}
    (hfx : ∀ y, IsScottContinuous (fun x => f x y))
    (hfy : ∀ x, IsScottContinuous (fun y => f x y))
    {g h : Pomega → Pomega} (hg : IsScottContinuous g) (hh : IsScottContinuous h) :
    IsScottContinuous (fun x => f (g x) (h x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h v))
    (fun v => comp (hfx (h v)) hg)
    (fun u => comp (hfy (g u)) hh)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} := by rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

theorem nary {f : Pomega → Pomega → Pomega → Pomega}
    (hf0 : ∀ y z, IsScottContinuous (fun x => f x y z))
```

```
    (hf1 : ∀ x z, IsScottContinuous (fun y => f x y z))
    (hf2 : ∀ x y, IsScottContinuous (fun z => f x y z))
    {g h i : Pomega → Pomega}
    (hg : IsScottContinuous g) (hh : IsScottContinuous h) (hi : IsScottContinuous i) :
    IsScottContinuous (fun x => f (g x) (h x) (i x)) := by
  constructor
  intro x
  have H := diag (x := x)
    (f := fun u v => f (g u) (h u) (i v))
    (fun v => tuple (fun y => hf0 y (i v)) (fun x => hf1 x (i v)) hg hh)
    (fun u => comp (hf2 (g u) (h u)) hi)
  ext k
  constructor
  · intro hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} := by
      rwa [← H]
    obtain ⟨n, hn, hkn⟩ := Set.mem_iUnion.mp this
    exact mem_scottUnion.mpr ⟨n, hn, hkn⟩
  · intro hk
    obtain ⟨n, hn, hkn⟩ := mem_scottUnion.mp hk
    have : k ∈ ⋃ n, {k | e n ⊆ x ∧ k ∈ f (g (e n)) (h (e n)) (i (e n))} :=
      Set.mem_iUnion.mpr ⟨n, hn, hkn⟩
    rwa [← H] at this

end theorem_1_3

/-- Scott Theorem 1.3 (unary composition case). -/
theorem theorem_1_3 {f g : Pomega → Pomega}
    (hf : IsScottContinuous f) (hg : IsScottContinuous g) :
    IsScottContinuous (fun x => f (g x)) :=
  theorem_1_3.comp hf hg

end DomainTheory.DataTypesAsLattices
```

9

iterateBot.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.eDense
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def iterateBot (f : Pomega → Pomega) : ℕ → Pomega
  | 0 => botElem
  | n + 1 => f (iterateBot f n)

end DomainTheory.DataTypesAsLattices
```

0

iterateBot.lean

```
module
```

```
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def iterateBot (f : Pomega → Pomega) : ℕ → Pomega
  | 0 => botElem
  | n + 1 => f (iterateBot f n)

end DomainTheory.DataTypesAsLattices
```

1

iterateBot.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.eDense
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def iterateBot (f : Pomega → Pomega) : ℕ → Pomega
  | 0 => botElem
  | n + 1 => f (iterateBot f n)

end DomainTheory.DataTypesAsLattices
```

2

iterateBot.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.eDense
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def iterateBot (f : Pomega → Pomega) : ℕ → Pomega
  | 0 => botElem
  | n + 1 => f (iterateBot f n)

end DomainTheory.DataTypesAsLattices
```

3

iterateBot.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.eDense
@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
def iterateBot (f : Pomega → Pomega) : ℕ → Pomega
  | 0 => botElem
  | n + 1 => f (iterateBot f n)

end DomainTheory.DataTypesAsLattices
```

4

iterateBot.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.eDense
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def iterateBot (f : Pomega → Pomega) : ℕ → Pomega
  | 0 => botElem
  | n + 1 => f (iterateBot f n)

end DomainTheory.DataTypesAsLattices
```

5

iterateBot.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.eDense
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def iterateBot (f : Pomega → Pomega) : ℕ → Pomega
  | 0 => botElem
  | n + 1 => f (iterateBot f n)

end DomainTheory.DataTypesAsLattices
```

6

iterateBot.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.eDense
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def iterateBot (f : Pomega → Pomega) : ℕ → Pomega
  | 0 => botElem
  | n + 1 => f (iterateBot f n)
```

```
end DomainTheory.DataTypesAsLattices
```

7

iterateBot.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.eDense
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def iterateBot (f : Pomega → Pomega) : ℕ → Pomega
  | 0 => botElem
  | n + 1 => f (iterateBot f n)

end DomainTheory.DataTypesAsLattices
```

8

iterateBot.lean

```
module

public import DomainTheory.DataTypesAsLattices.Pomega.eDense
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def iterateBot (f : Pomega → Pomega) : ℕ → Pomega
  | 0 => botElem
  | n + 1 => f (iterateBot f n)

end DomainTheory.DataTypesAsLattices
```

9

fix.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def fix (f : Pomega → Pomega) : Pomega :=
  ⋃ n, iterateBot f n

end DomainTheory.DataTypesAsLattices
```

0

fix.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def fix (f : Pomega → Pomega) : Pomega :=
  ⋃ n, iterateBot f n

end DomainTheory.DataTypesAsLattices
```

1

fix.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def fix (f : Pomega → Pomega) : Pomega :=
  ⋃ n, iterateBot f n

end DomainTheory.DataTypesAsLattices
```

2

fix.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def fix (f : Pomega → Pomega) : Pomega :=
  ⋃ n, iterateBot f n

end DomainTheory.DataTypesAsLattices
```

3

fix.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot

@[expose] public section
```

```
namespace DomainTheory.DataTypesAsLattices

def fix (f : Pomega → Pomega) : Pomega :=
  ⋃ n, iterateBot f n

end DomainTheory.DataTypesAsLattices
```

4

fix.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def fix (f : Pomega → Pomega) : Pomega :=
  ⋃ n, iterateBot f n

end DomainTheory.DataTypesAsLattices
```

5

fix.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def fix (f : Pomega → Pomega) : Pomega :=
  ⋃ n, iterateBot f n

end DomainTheory.DataTypesAsLattices
```

6

fix.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def fix (f : Pomega → Pomega) : Pomega :=
  ⋃ n, iterateBot f n
```

```
end DomainTheory.DataTypesAsLattices
```

7

fix.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def fix (f : Pomega → Pomega) : Pomega :=
  ⋃ n, iterateBot f n

end DomainTheory.DataTypesAsLattices
```

8

fix.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def fix (f : Pomega → Pomega) : Pomega :=
  ⋃ n, iterateBot f n

end DomainTheory.DataTypesAsLattices
```

9

theorem_1_4.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.chain_lemma
public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot_mono

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_4 {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    f (fix f) = fix f ∧ ∀ x, f x = x → fix f ⊆ x := by
  constructor
  .
    have hchain := chain_lemma hf (iterateBot f) (iterateBot_mono hf)
    unfold fix
```

```
    rw [hchain]
    ext k
    constructor
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      exact Set.mem_iUnion.mpr ⟨n + 1, hkn⟩
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      cases n with
      | zero => simp [iterateBot, botElem] at hkn
      | succ n => exact Set.mem_iUnion.mpr ⟨n, hkn⟩
  · intro x hx k hk
    obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
    have hsub : ∀ n, iterateBot f n ⊆ x := by
      intro n
      induction n with
      | zero => simp [iterateBot, botElem]
      | succ n ih =>
        simpa [iterateBot, hx] using IsScottContinuous.monotone hf ih
    exact hsub n hkn

end DomainTheory.DataTypesAsLattices
```

0

theorem_1_4.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.chain_lemma
public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot_mono

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_4 {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    f (fix f) = fix f ∧ ∀ x, f x = x → fix f ⊆ x := by
  constructor
  ·
    have hchain := chain_lemma hf (iterateBot f) (iterateBot_mono hf)
    unfold fix
    rw [hchain]
    ext k
    constructor
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      exact Set.mem_iUnion.mpr ⟨n + 1, hkn⟩
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      cases n with
      | zero => simp [iterateBot, botElem] at hkn
      | succ n => exact Set.mem_iUnion.mpr ⟨n, hkn⟩
  · intro x hx k hk
    obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
    have hsub : ∀ n, iterateBot f n ⊆ x := by
```

```
      intro n
      induction n with
      | zero => simp [iterateBot, botElem]
      | succ n ih =>
        simpa [iterateBot, hx] using IsScottContinuous.monotone hf ih
    exact hsub n hkn

end DomainTheory.DataTypesAsLattices
```

1

theorem_1_4.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.chain_lemma
public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot_mono

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_4 {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    f (fix f) = fix f ∧ ∀ x, f x = x → fix f ⊆ x := by
  constructor
  ·
    have hchain := chain_lemma hf (iterateBot f) (iterateBot_mono hf)
    unfold fix
    rw [hchain]
    ext k
    constructor
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      exact Set.mem_iUnion.mpr ⟨n + 1, hkn⟩
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      cases n with
      | zero => simp [iterateBot, botElem] at hkn
      | succ n => exact Set.mem_iUnion.mpr ⟨n, hkn⟩
  · intro x hx k hk
    obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
    have hsub : ∀ n, iterateBot f n ⊆ x := by
      intro n
      induction n with
      | zero => simp [iterateBot, botElem]
      | succ n ih =>
        simpa [iterateBot, hx] using IsScottContinuous.monotone hf ih
    exact hsub n hkn

end DomainTheory.DataTypesAsLattices
```

2

theorem_1_4.lean

```
module
```

```
public import DomainTheory.DataTypesAsLattices.FixedPoint.chain_lemma
public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot_mono

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_4 {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    f (fix f) = fix f ∧ ∀ x, f x = x → fix f ⊆ x := by
  constructor
  ·
    have hchain := chain_lemma hf (iterateBot f) (iterateBot_mono hf)
    unfold fix
    rw [hchain]
    ext k
    constructor
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      exact Set.mem_iUnion.mpr ⟨n + 1, hkn⟩
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      cases n with
      | zero => simp [iterateBot, botElem] at hkn
      | succ n => exact Set.mem_iUnion.mpr ⟨n, hkn⟩
  · intro x hx k hk
    obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
    have hsub : ∀ n, iterateBot f n ⊆ x := by
      intro n
      induction n with
      | zero => simp [iterateBot, botElem]
      | succ n ih =>
        simpa [iterateBot, hx] using IsScottContinuous.monotone hf ih
    exact hsub n hkn

end DomainTheory.DataTypesAsLattices
```

3

theorem_1_4.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.chain_lemma
public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot_mono

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_4 {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    f (fix f) = fix f ∧ ∀ x, f x = x → fix f ⊆ x := by
  constructor
  ·
    have hchain := chain_lemma hf (iterateBot f) (iterateBot_mono hf)
    unfold fix
```

```
    rw [hchain]
    ext k
    constructor
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      exact Set.mem_iUnion.mpr ⟨n + 1, hkn⟩
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      cases n with
      | zero => simp [iterateBot, botElem] at hkn
      | succ n => exact Set.mem_iUnion.mpr ⟨n, hkn⟩
  · intro x hx k hk
    obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
    have hsub : ∀ n, iterateBot f n ⊆ x := by
      intro n
      induction n with
      | zero => simp [iterateBot, botElem]
      | succ n ih =>
        simpa [iterateBot, hx] using IsScottContinuous.monotone hf ih
    exact hsub n hkn

end DomainTheory.DataTypesAsLattices
```

4

theorem_1_4.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.chain_lemma
public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot_mono

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_4 {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    f (fix f) = fix f ∧ ∀ x, f x = x → fix f ⊆ x := by
  constructor
  ·
    have hchain := chain_lemma hf (iterateBot f) (iterateBot_mono hf)
    unfold fix
    rw [hchain]
    ext k
    constructor
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      exact Set.mem_iUnion.mpr ⟨n + 1, hkn⟩
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      cases n with
      | zero => simp [iterateBot, botElem] at hkn
      | succ n => exact Set.mem_iUnion.mpr ⟨n, hkn⟩
  · intro x hx k hk
    obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
    have hsub : ∀ n, iterateBot f n ⊆ x := by
```

```
      intro n
      induction n with
      | zero => simp [iterateBot, botElem]
      | succ n ih =>
        simpa [iterateBot, hx] using IsScottContinuous.monotone hf ih
    exact hsub n hkn

end DomainTheory.DataTypesAsLattices
```

5

theorem_1_4.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.chain_lemma
public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot_mono

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_4 {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    f (fix f) = fix f ∧ ∀ x, f x = x → fix f ⊆ x := by
  constructor
  ·
    have hchain := chain_lemma hf (iterateBot f) (iterateBot_mono hf)
    unfold fix
    rw [hchain]
    ext k
    constructor
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      exact Set.mem_iUnion.mpr ⟨n + 1, hkn⟩
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      cases n with
      | zero => simp [iterateBot, botElem] at hkn
      | succ n => exact Set.mem_iUnion.mpr ⟨n, hkn⟩
  · intro x hx k hk
    obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
    have hsub : ∀ n, iterateBot f n ⊆ x := by
      intro n
      induction n with
      | zero => simp [iterateBot, botElem]
      | succ n ih =>
        simpa [iterateBot, hx] using IsScottContinuous.monotone hf ih
    exact hsub n hkn

end DomainTheory.DataTypesAsLattices
```

6

theorem_1_4.lean

```
module
```

```
public import DomainTheory.DataTypesAsLattices.FixedPoint.chain_lemma
public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot_mono

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_4 {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    f (fix f) = fix f ∧ ∀ x, f x = x → fix f ⊆ x := by
  constructor
  ·
    have hchain := chain_lemma hf (iterateBot f) (iterateBot_mono hf)
    unfold fix
    rw [hchain]
    ext k
    constructor
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      exact Set.mem_iUnion.mpr ⟨n + 1, hkn⟩
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      cases n with
      | zero => simp [iterateBot, botElem] at hkn
      | succ n => exact Set.mem_iUnion.mpr ⟨n, hkn⟩
  · intro x hx k hk
    obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
    have hsub : ∀ n, iterateBot f n ⊆ x := by
      intro n
      induction n with
      | zero => simp [iterateBot, botElem]
      | succ n ih =>
        simpa [iterateBot, hx] using IsScottContinuous.monotone hf ih
    exact hsub n hkn

end DomainTheory.DataTypesAsLattices
```

7

theorem_1_4.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.chain_lemma
public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot_mono

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_4 {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    f (fix f) = fix f ∧ ∀ x, f x = x → fix f ⊆ x := by
  constructor
  ·
    have hchain := chain_lemma hf (iterateBot f) (iterateBot_mono hf)
    unfold fix
```

```
    rw [hchain]
    ext k
    constructor
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      exact Set.mem_iUnion.mpr ⟨n + 1, hkn⟩
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      cases n with
      | zero => simp [iterateBot, botElem] at hkn
      | succ n => exact Set.mem_iUnion.mpr ⟨n, hkn⟩
  · intro x hx k hk
    obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
    have hsub : ∀ n, iterateBot f n ⊆ x := by
      intro n
      induction n with
      | zero => simp [iterateBot, botElem]
      | succ n ih =>
        simpa [iterateBot, hx] using IsScottContinuous.monotone hf ih
    exact hsub n hkn

end DomainTheory.DataTypesAsLattices
```

8

theorem_1_4.lean

```
module

public import DomainTheory.DataTypesAsLattices.FixedPoint.chain_lemma
public import DomainTheory.DataTypesAsLattices.FixedPoint.iterateBot_mono

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

theorem theorem_1_4 {f : Pomega → Pomega} (hf : IsScottContinuous f) :
    f (fix f) = fix f ∧ ∀ x, f x = x → fix f ⊆ x := by
  constructor
  ·
    have hchain := chain_lemma hf (iterateBot f) (iterateBot_mono hf)
    unfold fix
    rw [hchain]
    ext k
    constructor
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      exact Set.mem_iUnion.mpr ⟨n + 1, hkn⟩
    · intro hk
      obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
      cases n with
      | zero => simp [iterateBot, botElem] at hkn
      | succ n => exact Set.mem_iUnion.mpr ⟨n, hkn⟩
  · intro x hx k hk
    obtain ⟨n, hkn⟩ := Set.mem_iUnion.mp hk
    have hsub : ∀ n, iterateBot f n ⊆ x := by
```

```
      intro n
      induction n with
      | zero => simp [iterateBot, botElem]
      | succ n ih =>
        simpa [iterateBot, hx] using IsScottContinuous.monotone hf ih
    exact hsub n hkn

end DomainTheory.DataTypesAsLattices
```

9

memOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def memOpen (k : ℕ) : Set Pomega := {x | k ∈ x}

namespace memOpen

theorem eq_basicNhhd (k : ℕ) : memOpen k = basicNhhd (2 ^ k) := by
  ext x
  simp [memOpen, basicNhhd, e.pow2, Set.singleton_subset_iff]

end memOpen

end DomainTheory.DataTypesAsLattices
```

0

memOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def memOpen (k : ℕ) : Set Pomega := {x | k ∈ x}

namespace memOpen
```

```
theorem eq_basicNhhd (k : ℕ) : memOpen k = basicNhhd (2 ^ k) := by
  ext x
  simp [memOpen, basicNhhd, e.pow2, Set.singleton_subset_iff]

end memOpen

end DomainTheory.DataTypesAsLattices
```

1

memOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def memOpen (k : ℕ) : Set Pomega := {x | k ∈ x}

namespace memOpen

theorem eq_basicNhhd (k : ℕ) : memOpen k = basicNhhd (2 ^ k) := by
  ext x
  simp [memOpen, basicNhhd, e.pow2, Set.singleton_subset_iff]

end memOpen

end DomainTheory.DataTypesAsLattices
```

2

memOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def memOpen (k : ℕ) : Set Pomega := {x | k ∈ x}

namespace memOpen
```

```
theorem eq_basicNhhd (k : ℕ) : memOpen k = basicNhhd (2 ^ k) := by
  ext x
  simp [memOpen, basicNhhd, e.pow2, Set.singleton_subset_iff]

end memOpen

end DomainTheory.DataTypesAsLattices
```

3

memOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def memOpen (k : ℕ) : Set Pomega := {x | k ∈ x}

namespace memOpen

theorem eq_basicNhhd (k : ℕ) : memOpen k = basicNhhd (2 ^ k) := by
  ext x
  simp [memOpen, basicNhhd, e.pow2, Set.singleton_subset_iff]

end memOpen

end DomainTheory.DataTypesAsLattices
```

4

memOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def memOpen (k : ℕ) : Set Pomega := {x | k ∈ x}

namespace memOpen
```

```
theorem eq_basicNhhd (k : ℕ) : memOpen k = basicNhhd (2 ^ k) := by
  ext x
  simp [memOpen, basicNhhd, e.pow2, Set.singleton_subset_iff]

end memOpen

end DomainTheory.DataTypesAsLattices
```

5

memOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def memOpen (k : ℕ) : Set Pomega := {x | k ∈ x}

namespace memOpen

theorem eq_basicNhhd (k : ℕ) : memOpen k = basicNhhd (2 ^ k) := by
  ext x
  simp [memOpen, basicNhhd, e.pow2, Set.singleton_subset_iff]

end memOpen

end DomainTheory.DataTypesAsLattices
```

6

memOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def memOpen (k : ℕ) : Set Pomega := {x | k ∈ x}

namespace memOpen
```

```
theorem eq_basicNhhd (k : ℕ) : memOpen k = basicNhhd (2 ^ k) := by
  ext x
  simp [memOpen, basicNhhd, e.pow2, Set.singleton_subset_iff]

end memOpen

end DomainTheory.DataTypesAsLattices
```

7

memOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def memOpen (k : ℕ) : Set Pomega := {x | k ∈ x}

namespace memOpen

theorem eq_basicNhhd (k : ℕ) : memOpen k = basicNhhd (2 ^ k) := by
  ext x
  simp [memOpen, basicNhhd, e.pow2, Set.singleton_subset_iff]

end memOpen

end DomainTheory.DataTypesAsLattices
```

8

memOpen.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.basicNhhd
import Mathlib.Data.Finset.Attr
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

def memOpen (k : ℕ) : Set Pomega := {x | k ∈ x}

namespace memOpen
```

```
theorem eq_basicNhhd (k : ℕ) : memOpen k = basicNhhd (2 ^ k) := by
  ext x
  simp [memOpen, basicNhhd, e.pow2, Set.singleton_subset_iff]

end memOpen

end DomainTheory.DataTypesAsLattices
```

9

Basic.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

instance : TopologicalSpace Pomega :=
  .generateFrom (Set.range memOpen)
end DomainTheory.DataTypesAsLattices
```

0

Basic.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

instance : TopologicalSpace Pomega :=
  .generateFrom (Set.range memOpen)
end DomainTheory.DataTypesAsLattices
```

1

Basic.lean

```
module

public import Mathlib.Topology.Order
```

```
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

instance : TopologicalSpace Pomega :=
  .generateFrom (Set.range memOpen)
end DomainTheory.DataTypesAsLattices
```

2

Basic.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

instance : TopologicalSpace Pomega :=
  .generateFrom (Set.range memOpen)
end DomainTheory.DataTypesAsLattices
```

3

Basic.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

instance : TopologicalSpace Pomega :=
  .generateFrom (Set.range memOpen)
end DomainTheory.DataTypesAsLattices
```

4

Basic.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

instance : TopologicalSpace Pomega :=
  .generateFrom (Set.range memOpen)
end DomainTheory.DataTypesAsLattices
```

5

Basic.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

instance : TopologicalSpace Pomega :=
  .generateFrom (Set.range memOpen)
end DomainTheory.DataTypesAsLattices
```

6

Basic.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

instance : TopologicalSpace Pomega :=
  .generateFrom (Set.range memOpen)
end DomainTheory.DataTypesAsLattices
```

7

Basic.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

instance : TopologicalSpace Pomega :=
  .generateFrom (Set.range memOpen)
end DomainTheory.DataTypesAsLattices
```

8

Basic.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

instance : TopologicalSpace Pomega :=
  .generateFrom (Set.range memOpen)
end DomainTheory.DataTypesAsLattices
```

9

extend.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import Mathlib.Data.Set.Lattice.Indexed
@[expose] public section

namespace DomainTheory.DataTypesAsLattices
```

```
open TopologicalSpace Topology Function

def extend {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (y : Y) : Pomega :=
  ⋃₀ { t | ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ t = ⋂₀ (f '' {x : X | ↑x ∈ U}) }

namespace extend

theorem mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) {y : Y} {k : ℕ} :
    k ∈ extend (Y := Y) (X := X) f y ↔
      ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x := by
  constructor
  · intro hk
    rcases Set.mem_sUnion.mp hk with ⟨t, ⟨U, hU, hy, rfl⟩, hkt⟩
    refine ⟨U, hU, hy, ?_⟩
    intro x hx
    exact Set.mem_sInter.mp hkt (f x) ⟨x, hx, rfl⟩
  · intro ⟨U, hU, hy, hall⟩
    refine Set.mem_sUnion.mpr ⟨⋂₀ (f '' {x : X | ↑x ∈ U}), ⟨U, hU, hy, rfl⟩, ?_⟩
    intro t ht
    rcases ht with ⟨x, hx, rfl⟩
    exact hall x hx

theorem isOpen_mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (k : ℕ) :
    IsOpen {y : Y | k ∈ extend (Y := Y) (X := X) f y} := by
  have : {y : Y | k ∈ extend (Y := Y) (X := X) f y} =
      ⋃ U ∈ {U : Set Y | IsOpen U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x}, U := by
    ext y
    constructor
    · intro hy
      obtain ⟨U, hU, hyU, hall⟩ := (mem f).mp hy
      exact Set.mem_iUnion₂.mpr ⟨U, ⟨hU, hall⟩, hyU⟩
    · intro hy
      obtain ⟨U, hU, hyU⟩ := Set.mem_iUnion₂.mp hy
      exact (mem f).mpr ⟨U, hU.1, hyU, hU.2⟩
  rw [this]
  exact isOpen_biUnion fun _ hU => hU.1

end extend

end DomainTheory.DataTypesAsLattices
```

0

extend.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import Mathlib.Data.Set.Lattice.Indexed
```

```
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def extend {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (y : Y) : Pomega :=
  ⋃₀ { t | ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ t = ⋂₀ (f '' {x : X | ↑x ∈ U}) }

namespace extend

theorem mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) {y : Y} {k : ℕ} :
    k ∈ extend (Y := Y) (X := X) f y ↔
      ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x := by
  constructor
  · intro hk
    rcases Set.mem_sUnion.mp hk with ⟨t, ⟨U, hU, hy, rfl⟩, hkt⟩
    refine ⟨U, hU, hy, ?_⟩
    intro x hx
    exact Set.mem_sInter.mp hkt (f x) ⟨x, hx, rfl⟩
  · intro ⟨U, hU, hy, hall⟩
    refine Set.mem_sUnion.mpr ⟨⋂₀ (f '' {x : X | ↑x ∈ U}), ⟨U, hU, hy, rfl⟩, ?_⟩
    intro t ht
    rcases ht with ⟨x, hx, rfl⟩
    exact hall x hx

theorem isOpen_mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (k : ℕ) :
    IsOpen {y : Y | k ∈ extend (Y := Y) (X := X) f y} := by
  have : {y : Y | k ∈ extend (Y := Y) (X := X) f y} =
      ⋃ U ∈ {U : Set Y | IsOpen U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x}, U := by
    ext y
    constructor
    · intro hy
      obtain ⟨U, hU, hyU, hall⟩ := (mem f).mp hy
      exact Set.mem_iUnion₂.mpr ⟨U, ⟨hU, hall⟩, hyU⟩
    · intro hy
      obtain ⟨U, hU, hyU⟩ := Set.mem_iUnion₂.mp hy
      exact (mem f).mpr ⟨U, hU.1, hyU, hU.2⟩
  rw [this]
  exact isOpen_biUnion fun _ hU => hU.1

end extend

end DomainTheory.DataTypesAsLattices
```

1

extend.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
```

```
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import Mathlib.Data.Set.Lattice.Indexed
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def extend {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (y : Y) : Pomega :=
  ⋃₀ { t | ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ t = ⋂₀ (f '' {x : X | ↑x ∈ U}) }

namespace extend

theorem mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) {y : Y} {k : ℕ} :
    k ∈ extend (Y := Y) (X := X) f y ↔
      ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x := by
  constructor
  · intro hk
    rcases Set.mem_sUnion.mp hk with ⟨t, ⟨U, hU, hy, rfl⟩, hkt⟩
    refine ⟨U, hU, hy, ?_⟩
    intro x hx
    exact Set.mem_sInter.mp hkt (f x) ⟨x, hx, rfl⟩
  · intro ⟨U, hU, hy, hall⟩
    refine Set.mem_sUnion.mpr ⟨⋂₀ (f '' {x : X | ↑x ∈ U}), ⟨U, hU, hy, rfl⟩, ?_⟩
    intro t ht
    rcases ht with ⟨x, hx, rfl⟩
    exact hall x hx

theorem isOpen_mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (k : ℕ) :
    IsOpen {y : Y | k ∈ extend (Y := Y) (X := X) f y} := by
  have : {y : Y | k ∈ extend (Y := Y) (X := X) f y} =
      ⋃ U ∈ {U : Set Y | IsOpen U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x}, U := by
    ext y
    constructor
    · intro hy
      obtain ⟨U, hU, hyU, hall⟩ := (mem f).mp hy
      exact Set.mem_iUnion₂.mpr ⟨U, ⟨hU, hall⟩, hyU⟩
    · intro hy
      obtain ⟨U, hU, hyU⟩ := Set.mem_iUnion₂.mp hy
      exact (mem f).mpr ⟨U, hU.1, hyU, hU.2⟩
  rw [this]
  exact isOpen_biUnion fun _ hU => hU.1

end extend

end DomainTheory.DataTypesAsLattices
```

2

extend.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import Mathlib.Data.Set.Lattice.Indexed
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def extend {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (y : Y) : Pomega :=
  ⋃₀ { t | ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ t = ⋂₀ (f '' {x : X | ↑x ∈ U}) }

namespace extend

theorem mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) {y : Y} {k : ℕ} :
    k ∈ extend (Y := Y) (X := X) f y ↔
      ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x := by
  constructor
  · intro hk
    rcases Set.mem_sUnion.mp hk with ⟨t, ⟨U, hU, hy, rfl⟩, hkt⟩
    refine ⟨U, hU, hy, ?_⟩
    intro x hx
    exact Set.mem_sInter.mp hkt (f x) ⟨x, hx, rfl⟩
  · intro ⟨U, hU, hy, hall⟩
    refine Set.mem_sUnion.mpr ⟨⋂₀ (f '' {x : X | ↑x ∈ U}), ⟨U, hU, hy, rfl⟩, ?_⟩
    intro t ht
    rcases ht with ⟨x, hx, rfl⟩
    exact hall x hx

theorem isOpen_mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (k : ℕ) :
    IsOpen {y : Y | k ∈ extend (Y := Y) (X := X) f y} := by
  have : {y : Y | k ∈ extend (Y := Y) (X := X) f y} =
      ⋃ U ∈ {U : Set Y | IsOpen U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x}, U := by
    ext y
    constructor
    · intro hy
      obtain ⟨U, hU, hyU, hall⟩ := (mem f).mp hy
      exact Set.mem_iUnion₂.mpr ⟨U, ⟨hU, hall⟩, hyU⟩
    · intro hy
      obtain ⟨U, hU, hyU⟩ := Set.mem_iUnion₂.mp hy
      exact (mem f).mpr ⟨U, hU.1, hyU, hU.2⟩
  rw [this]
  exact isOpen_biUnion fun _ hU => hU.1

end extend

end DomainTheory.DataTypesAsLattices
```

extend.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import Mathlib.Data.Set.Lattice.Indexed
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def extend {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (y : Y) : Pomega :=
  ⋃₀ { t | ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ t = ⋂₀ (f '' {x : X | ↑x ∈ U}) }

namespace extend

theorem mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) {y : Y} {k : ℕ} :
    k ∈ extend (Y := Y) (X := X) f y ↔
      ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x := by
  constructor
  · intro hk
    rcases Set.mem_sUnion.mp hk with ⟨t, ⟨U, hU, hy, rfl⟩, hkt⟩
    refine ⟨U, hU, hy, ?_⟩
    intro x hx
    exact Set.mem_sInter.mp hkt (f x) ⟨x, hx, rfl⟩
  · intro ⟨U, hU, hy, hall⟩
    refine Set.mem_sUnion.mpr ⟨⋂₀ (f '' {x : X | ↑x ∈ U}), ⟨U, hU, hy, rfl⟩, ?_⟩
    intro t ht
    rcases ht with ⟨x, hx, rfl⟩
    exact hall x hx

theorem isOpen_mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (k : ℕ) :
    IsOpen {y : Y | k ∈ extend (Y := Y) (X := X) f y} := by
  have : {y : Y | k ∈ extend (Y := Y) (X := X) f y} =
      ⋃ U ∈ {U : Set Y | IsOpen U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x}, U := by
    ext y
    constructor
    · intro hy
      obtain ⟨U, hU, hyU, hall⟩ := (mem f).mp hy
      exact Set.mem_iUnion₂.mpr ⟨U, ⟨hU, hall⟩, hyU⟩
    · intro hy
      obtain ⟨U, hU, hyU⟩ := Set.mem_iUnion₂.mp hy
      exact (mem f).mpr ⟨U, hU.1, hyU, hU.2⟩
  rw [this]
  exact isOpen_biUnion fun _ hU => hU.1
```

```
end extend

end DomainTheory.DataTypesAsLattices
```

4

extend.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import Mathlib.Data.Set.Lattice.Indexed
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def extend {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (y : Y) : Pomega :=
  ⋃₀ { t | ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ t = ⋂₀ (f '' {x : X | ↑x ∈ U}) }

namespace extend

theorem mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) {y : Y} {k : ℕ} :
    k ∈ extend (Y := Y) (X := X) f y ↔
      ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x := by
  constructor
  · intro hk
    rcases Set.mem_sUnion.mp hk with ⟨t, ⟨U, hU, hy, rfl⟩, hkt⟩
    refine ⟨U, hU, hy, ?_⟩
    intro x hx
    exact Set.mem_sInter.mp hkt (f x) ⟨x, hx, rfl⟩
  · intro ⟨U, hU, hy, hall⟩
    refine Set.mem_sUnion.mpr ⟨⋂₀ (f '' {x : X | ↑x ∈ U}), ⟨U, hU, hy, rfl⟩, ?_⟩
    intro t ht
    rcases ht with ⟨x, hx, rfl⟩
    exact hall x hx

theorem isOpen_mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (k : ℕ) :
    IsOpen {y : Y | k ∈ extend (Y := Y) (X := X) f y} := by
  have : {y : Y | k ∈ extend (Y := Y) (X := X) f y} =
      ⋃ U ∈ {U : Set Y | IsOpen U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x}, U := by
    ext y
    constructor
    · intro hy
      obtain ⟨U, hU, hyU, hall⟩ := (mem f).mp hy
      exact Set.mem_iUnion₂.mpr ⟨U, ⟨hU, hall⟩, hyU⟩
    · intro hy
      obtain ⟨U, hU, hyU⟩ := Set.mem_iUnion₂.mp hy
```

```
      exact (mem f).mpr ⟨U, hU.1, hyU, hU.2⟩
  rw [this]
  exact isOpen_biUnion fun _ hU => hU.1

end extend

end DomainTheory.DataTypesAsLattices
```

5

extend.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import Mathlib.Data.Set.Lattice.Indexed
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def extend {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (y : Y) : Pomega :=
  ⋃₀ { t | ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ t = ⋂₀ (f '' {x : X | ↑x ∈ U}) }

namespace extend

theorem mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) {y : Y} {k : ℕ} :
    k ∈ extend (Y := Y) (X := X) f y ↔
      ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x := by
  constructor
  · intro hk
    rcases Set.mem_sUnion.mp hk with ⟨t, ⟨U, hU, hy, rfl⟩, hkt⟩
    refine ⟨U, hU, hy, ?_⟩
    intro x hx
    exact Set.mem_sInter.mp hkt (f x) ⟨x, hx, rfl⟩
  · intro ⟨U, hU, hy, hall⟩
    refine Set.mem_sUnion.mpr ⟨⋂₀ (f '' {x : X | ↑x ∈ U}), ⟨U, hU, hy, rfl⟩, ?_⟩
    intro t ht
    rcases ht with ⟨x, hx, rfl⟩
    exact hall x hx

theorem isOpen_mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (k : ℕ) :
    IsOpen {y : Y | k ∈ extend (Y := Y) (X := X) f y} := by
  have : {y : Y | k ∈ extend (Y := Y) (X := X) f y} =
      ⋃ U ∈ {U : Set Y | IsOpen U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x}, U := by
    ext y
    constructor
    · intro hy
```

```
      obtain ⟨U, hU, hyU, hall⟩ := (mem f).mp hy
      exact Set.mem_iUnion₂.mpr ⟨U, ⟨hU, hall⟩, hyU⟩
    · intro hy
      obtain ⟨U, hU, hyU⟩ := Set.mem_iUnion₂.mp hy
      exact (mem f).mpr ⟨U, hU.1, hyU, hU.2⟩
  rw [this]
  exact isOpen_biUnion fun _ hU => hU.1

end extend

end DomainTheory.DataTypesAsLattices
```

6

extend.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import Mathlib.Data.Set.Lattice.Indexed
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def extend {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (y : Y) : Pomega :=
  ⋃₀ { t | ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ t = ⋂₀ (f '' {x : X | ↑x ∈ U}) }

namespace extend

theorem mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) {y : Y} {k : ℕ} :
    k ∈ extend (Y := Y) (X := X) f y ↔
      ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x := by
  constructor
  · intro hk
    rcases Set.mem_sUnion.mp hk with ⟨t, ⟨U, hU, hy, rfl⟩, hkt⟩
    refine ⟨U, hU, hy, ?_⟩
    intro x hx
    exact Set.mem_sInter.mp hkt (f x) ⟨x, hx, rfl⟩
  · intro ⟨U, hU, hy, hall⟩
    refine Set.mem_sUnion.mpr ⟨⋂₀ (f '' {x : X | ↑x ∈ U}), ⟨U, hU, hy, rfl⟩, ?_⟩
    intro t ht
    rcases ht with ⟨x, hx, rfl⟩
    exact hall x hx

theorem isOpen_mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (k : ℕ) :
    IsOpen {y : Y | k ∈ extend (Y := Y) (X := X) f y} := by
  have : {y : Y | k ∈ extend (Y := Y) (X := X) f y} =
```

```
      ⋃ U ∈ {U : Set Y | IsOpen U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x}, U := by
    ext y
    constructor
    · intro hy
      obtain ⟨U, hU, hyU, hall⟩ := (mem f).mp hy
      exact Set.mem_iUnion₂.mpr ⟨U, ⟨hU, hall⟩, hyU⟩
    · intro hy
      obtain ⟨U, hU, hyU⟩ := Set.mem_iUnion₂.mp hy
      exact (mem f).mpr ⟨U, hU.1, hyU, hU.2⟩
  rw [this]
  exact isOpen_biUnion fun _ hU => hU.1

end extend

end DomainTheory.DataTypesAsLattices
```

7

extend.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import Mathlib.Data.Set.Lattice.Indexed
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def extend {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (y : Y) : Pomega :=
  ⋃₀ { t | ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ t = ⋂₀ (f '' {x : X | ↑x ∈ U}) }

namespace extend

theorem mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) {y : Y} {k : ℕ} :
    k ∈ extend (Y := Y) (X := X) f y ↔
      ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x := by
  constructor
  · intro hk
    rcases Set.mem_sUnion.mp hk with ⟨t, ⟨U, hU, hy, rfl⟩, hkt⟩
    refine ⟨U, hU, hy, ?_⟩
    intro x hx
    exact Set.mem_sInter.mp hkt (f x) ⟨x, hx, rfl⟩
  · intro ⟨U, hU, hy, hall⟩
    refine Set.mem_sUnion.mpr ⟨⋂₀ (f '' {x : X | ↑x ∈ U}), ⟨U, hU, hy, rfl⟩, ?_⟩
    intro t ht
    rcases ht with ⟨x, hx, rfl⟩
    exact hall x hx
```

```
theorem isOpen_mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (k : ℕ) :
    IsOpen {y : Y | k ∈ extend (Y := Y) (X := X) f y} := by
  have : {y : Y | k ∈ extend (Y := Y) (X := X) f y} =
      ⋃ U ∈ {U : Set Y | IsOpen U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x}, U := by
    ext y
    constructor
    · intro hy
      obtain ⟨U, hU, hyU, hall⟩ := (mem f).mp hy
      exact Set.mem_iUnion₂.mpr ⟨U, ⟨hU, hall⟩, hyU⟩
    · intro hy
      obtain ⟨U, hU, hyU⟩ := Set.mem_iUnion₂.mp hy
      exact (mem f).mpr ⟨U, hU.1, hyU, hU.2⟩
  rw [this]
  exact isOpen_biUnion fun _ hU => hU.1

end extend

end DomainTheory.DataTypesAsLattices
```

8

extend.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import Mathlib.Data.Set.Lattice.Indexed
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def extend {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (y : Y) : Pomega :=
  ⋃₀ { t | ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ t = ⋂₀ (f '' {x : X | ↑x ∈ U}) }

namespace extend

theorem mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) {y : Y} {k : ℕ} :
    k ∈ extend (Y := Y) (X := X) f y ↔
      ∃ U : Set Y, IsOpen U ∧ y ∈ U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x := by
  constructor
  · intro hk
    rcases Set.mem_sUnion.mp hk with ⟨t, ⟨U, hU, hy, rfl⟩, hkt⟩
    refine ⟨U, hU, hy, ?_⟩
    intro x hx
    exact Set.mem_sInter.mp hkt (f x) ⟨x, hx, rfl⟩
  · intro ⟨U, hU, hy, hall⟩
    refine Set.mem_sUnion.mpr ⟨⋂₀ (f '' {x : X | ↑x ∈ U}), ⟨U, hU, hy, rfl⟩, ?_⟩
```

```
    intro t ht
    rcases ht with ⟨x, hx, rfl⟩
    exact hall x hx

theorem isOpen_mem {Y : Type*} [TopologicalSpace Y] {X : Set Y}
    (f : X → Pomega) (k : ℕ) :
    IsOpen {y : Y | k ∈ extend (Y := Y) (X := X) f y} := by
  have : {y : Y | k ∈ extend (Y := Y) (X := X) f y} =
      ⋃ U ∈ {U : Set Y | IsOpen U ∧ ∀ x : X, ↑x ∈ U → k ∈ f x}, U := by
    ext y
    constructor
    · intro hy
      obtain ⟨U, hU, hyU, hall⟩ := (mem f).mp hy
      exact Set.mem_iUnion₂.mpr ⟨U, ⟨hU, hall⟩, hyU⟩
    · intro hy
      obtain ⟨U, hU, hyU⟩ := Set.mem_iUnion₂.mp hy
      exact (mem f).mpr ⟨U, hU.1, hyU, hU.2⟩
  rw [this]
  exact isOpen_biUnion fun _ hU => hU.1

end extend

end DomainTheory.DataTypesAsLattices
```

9

basicNhhd_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.Lattice.Indexed
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace basicNhhd

theorem eq_iInter (n : ℕ) :
    basicNhhd n = ⋂ k ∈ e n, memOpen k := by
  ext x
  simp [basicNhhd, memOpen, Set.subset_def]

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

0

basicNhhd_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.Lattice.Indexed
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace basicNhhd

theorem eq_iInter (n : ℕ) :
    basicNhhd n = ⋂ k ∈ e n, memOpen k := by
  ext x
  simp [basicNhhd, memOpen, Set.subset_def]

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

1

basicNhhd_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.Lattice.Indexed
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace basicNhhd

theorem eq_iInter (n : ℕ) :
    basicNhhd n = ⋂ k ∈ e n, memOpen k := by
  ext x
  simp [basicNhhd, memOpen, Set.subset_def]

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

2

basicNhhd_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.Lattice.Indexed
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace basicNhhd

theorem eq_iInter (n : ℕ) :
    basicNhhd n = ⋂ k ∈ e n, memOpen k := by
  ext x
  simp [basicNhhd, memOpen, Set.subset_def]

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

3

basicNhhd_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.Lattice.Indexed
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace basicNhhd

theorem eq_iInter (n : ℕ) :
    basicNhhd n = ⋂ k ∈ e n, memOpen k := by
  ext x
  simp [basicNhhd, memOpen, Set.subset_def]

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

4

basicNhhd_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.Lattice.Indexed
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace basicNhhd

theorem eq_iInter (n : ℕ) :
    basicNhhd n = ⋂ k ∈ e n, memOpen k := by
  ext x
  simp [basicNhhd, memOpen, Set.subset_def]

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

5

basicNhhd_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.Lattice.Indexed
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace basicNhhd

theorem eq_iInter (n : ℕ) :
    basicNhhd n = ⋂ k ∈ e n, memOpen k := by
  ext x
  simp [basicNhhd, memOpen, Set.subset_def]

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

6

basicNhhd_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.Lattice.Indexed
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace basicNhhd

theorem eq_iInter (n : ℕ) :
    basicNhhd n = ⋂ k ∈ e n, memOpen k := by
  ext x
  simp [basicNhhd, memOpen, Set.subset_def]

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

7

basicNhhd_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.Lattice.Indexed
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace basicNhhd

theorem eq_iInter (n : ℕ) :
    basicNhhd n = ⋂ k ∈ e n, memOpen k := by
  ext x
  simp [basicNhhd, memOpen, Set.subset_def]

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

8

basicNhhd_more.lean

```
module

public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import Mathlib.Order.SetNotation
import Mathlib.Data.Finset.Attr
import Mathlib.Data.Set.Lattice.Indexed
import Mathlib.Tactic.Bound.Init
import Mathlib.Tactic.Continuity.Init
import Mathlib.Tactic.SetLike

@[expose] public section

namespace DomainTheory.DataTypesAsLattices

namespace basicNhhd

theorem eq_iInter (n : ℕ) :
    basicNhhd n = ⋂ k ∈ e n, memOpen k := by
  ext x
  simp [basicNhhd, memOpen, Set.subset_def]

end basicNhhd

end DomainTheory.DataTypesAsLattices
```

9

embed.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def embed {X : Type*} (U : ℕ → Set X) (x : X) : Pomega :=
  {n | x ∈ U n}

namespace embed

theorem continuous {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Continuous (embed U) :=
```

```
  continuous_generateFrom_iff.2 fun t ⟨n, hn⟩ => by
    subst hn
    change IsOpen (U n)
    exact hbasis.isOpen ⟨n, rfl⟩

theorem inducing {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    IsInducing (embed U) := by
  refine ⟨?_⟩
  rw [hbasis.eq_generateFrom]
  change generateFrom (Set.range U) =
    (generateFrom (Set.range memOpen)).induced (embed U)
  rw [induced_generateFrom_eq]
  congr 1
  ext V
  constructor
  · rintro ⟨n, rfl⟩
    exact ⟨memOpen n, ⟨n, rfl⟩, rfl⟩
  · rintro ⟨_, ⟨n, rfl⟩, rfl⟩
    exact ⟨n, rfl⟩

theorem injective {X : Type*} [TopologicalSpace X] [T0Space X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Injective (embed U) := by
  intro x y hxy
  have hmem : ∀ n, x ∈ U n ↔ y ∈ U n := fun n =>
    show n ∈ embed U x ↔ n ∈ embed U y by rw [hxy]
  refine Inseparable.eq ?_
  refine inseparable_iff_forall_isOpen.mpr ?_
  intro V hV
  constructor
  · intro hx
    obtain ⟨t, ⟨n, rfl⟩, hxt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hx)
    exact htV ((hmem n).mp hxt)
  · intro hy
    obtain ⟨t, ⟨n, rfl⟩, hyt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hy)
    exact htV ((hmem n).mpr hyt)

end embed

end DomainTheory.DataTypesAsLattices
```

0

embed.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
```

```
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def embed {X : Type*} (U : ℕ → Set X) (x : X) : Pomega :=
  {n | x ∈ U n}

namespace embed

theorem continuous {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Continuous (embed U) :=
  continuous_generateFrom_iff.2 fun t ⟨n, hn⟩ => by
    subst hn
    change IsOpen (U n)
    exact hbasis.isOpen ⟨n, rfl⟩

theorem inducing {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    IsInducing (embed U) := by
  refine ⟨?_⟩
  rw [hbasis.eq_generateFrom]
  change generateFrom (Set.range U) =
    (generateFrom (Set.range memOpen)).induced (embed U)
  rw [induced_generateFrom_eq]
  congr 1
  ext V
  constructor
  · rintro ⟨n, rfl⟩
    exact ⟨memOpen n, ⟨n, rfl⟩, rfl⟩
  · rintro ⟨_, ⟨n, rfl⟩, rfl⟩
    exact ⟨n, rfl⟩

theorem injective {X : Type*} [TopologicalSpace X] [T0Space X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Injective (embed U) := by
  intro x y hxy
  have hmem : ∀ n, x ∈ U n ↔ y ∈ U n := fun n =>
    show n ∈ embed U x ↔ n ∈ embed U y by rw [hxy]
  refine Inseparable.eq ?_
  refine inseparable_iff_forall_isOpen.mpr ?_
  intro V hV
  constructor
  · intro hx
    obtain ⟨t, ⟨n, rfl⟩, hxt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hx)
    exact htV ((hmem n).mp hxt)
  · intro hy
    obtain ⟨t, ⟨n, rfl⟩, hyt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hy)
    exact htV ((hmem n).mpr hyt)

end embed
```

```
end DomainTheory.DataTypesAsLattices
```

1

embed.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def embed {X : Type*} (U : ℕ → Set X) (x : X) : Pomega :=
  {n | x ∈ U n}

namespace embed

theorem continuous {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Continuous (embed U) :=
  continuous_generateFrom_iff.2 fun t ⟨n, hn⟩ => by
    subst hn
    change IsOpen (U n)
    exact hbasis.isOpen ⟨n, rfl⟩

theorem inducing {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    IsInducing (embed U) := by
  refine ⟨?_⟩
  rw [hbasis.eq_generateFrom]
  change generateFrom (Set.range U) =
    (generateFrom (Set.range memOpen)).induced (embed U)
  rw [induced_generateFrom_eq]
  congr 1
  ext V
  constructor
  · rintro ⟨n, rfl⟩
    exact ⟨memOpen n, ⟨n, rfl⟩, rfl⟩
  · rintro ⟨_, ⟨n, rfl⟩, rfl⟩
    exact ⟨n, rfl⟩

theorem injective {X : Type*} [TopologicalSpace X] [T0Space X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Injective (embed U) := by
  intro x y hxy
  have hmem : ∀ n, x ∈ U n ↔ y ∈ U n := fun n =>
```

```
    show n ∈ embed U x ↔ n ∈ embed U y by rw [hxy]
  refine Inseparable.eq ?_
  refine inseparable_iff_forall_isOpen.mpr ?_
  intro V hV
  constructor
  · intro hx
    obtain ⟨t, ⟨n, rfl⟩, hxt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hx)
    exact htV ((hmem n).mp hxt)
  · intro hy
    obtain ⟨t, ⟨n, rfl⟩, hyt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hy)
    exact htV ((hmem n).mpr hyt)

end embed

end DomainTheory.DataTypesAsLattices
```

2

embed.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def embed {X : Type*} (U : ℕ → Set X) (x : X) : Pomega :=
  {n | x ∈ U n}

namespace embed

theorem continuous {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Continuous (embed U) :=
  continuous_generateFrom_iff.2 fun t ⟨n, hn⟩ => by
    subst hn
    change IsOpen (U n)
    exact hbasis.isOpen ⟨n, rfl⟩

theorem inducing {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    IsInducing (embed U) := by
  refine ⟨?_⟩
  rw [hbasis.eq_generateFrom]
  change generateFrom (Set.range U) =
```

```
    (generateFrom (Set.range memOpen)).induced (embed U)
  rw [induced_generateFrom_eq]
  congr 1
  ext V
  constructor
  · rintro ⟨n, rfl⟩
    exact ⟨memOpen n, ⟨n, rfl⟩, rfl⟩
  · rintro ⟨_, ⟨n, rfl⟩, rfl⟩
    exact ⟨n, rfl⟩

theorem injective {X : Type*} [TopologicalSpace X] [T0Space X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Injective (embed U) := by
  intro x y hxy
  have hmem : ∀ n, x ∈ U n ↔ y ∈ U n := fun n =>
    show n ∈ embed U x ↔ n ∈ embed U y by rw [hxy]
  refine Inseparable.eq ?_
  refine inseparable_iff_forall_isOpen.mpr ?_
  intro V hV
  constructor
  · intro hx
    obtain ⟨t, ⟨n, rfl⟩, hxt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hx)
    exact htV ((hmem n).mp hxt)
  · intro hy
    obtain ⟨t, ⟨n, rfl⟩, hyt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hy)
    exact htV ((hmem n).mpr hyt)

end embed

end DomainTheory.DataTypesAsLattices
```

3

embed.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def embed {X : Type*} (U : ℕ → Set X) (x : X) : Pomega :=
  {n | x ∈ U n}

namespace embed
```

```
theorem continuous {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Continuous (embed U) :=
  continuous_generateFrom_iff.2 fun t ⟨n, hn⟩ => by
    subst hn
    change IsOpen (U n)
    exact hbasis.isOpen ⟨n, rfl⟩

theorem inducing {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    IsInducing (embed U) := by
  refine ⟨?_⟩
  rw [hbasis.eq_generateFrom]
  change generateFrom (Set.range U) =
    (generateFrom (Set.range memOpen)).induced (embed U)
  rw [induced_generateFrom_eq]
  congr 1
  ext V
  constructor
  · rintro ⟨n, rfl⟩
    exact ⟨memOpen n, ⟨n, rfl⟩, rfl⟩
  · rintro ⟨_, ⟨n, rfl⟩, rfl⟩
    exact ⟨n, rfl⟩

theorem injective {X : Type*} [TopologicalSpace X] [T0Space X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Injective (embed U) := by
  intro x y hxy
  have hmem : ∀ n, x ∈ U n ↔ y ∈ U n := fun n =>
    show n ∈ embed U x ↔ n ∈ embed U y by rw [hxy]
  refine Inseparable.eq ?_
  refine inseparable_iff_forall_isOpen.mpr ?_
  intro V hV
  constructor
  · intro hx
    obtain ⟨t, ⟨n, rfl⟩, hxt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hx)
    exact htV ((hmem n).mp hxt)
  · intro hy
    obtain ⟨t, ⟨n, rfl⟩, hyt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hy)
    exact htV ((hmem n).mpr hyt)

end embed

end DomainTheory.DataTypesAsLattices
```

4

embed.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
```

```
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def embed {X : Type*} (U : ℕ → Set X) (x : X) : Pomega :=
  {n | x ∈ U n}

namespace embed

theorem continuous {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Continuous (embed U) :=
  continuous_generateFrom_iff.2 fun t ⟨n, hn⟩ => by
    subst hn
    change IsOpen (U n)
    exact hbasis.isOpen ⟨n, rfl⟩

theorem inducing {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    IsInducing (embed U) := by
  refine ⟨?_⟩
  rw [hbasis.eq_generateFrom]
  change generateFrom (Set.range U) =
    (generateFrom (Set.range memOpen)).induced (embed U)
  rw [induced_generateFrom_eq]
  congr 1
  ext V
  constructor
  · rintro ⟨n, rfl⟩
    exact ⟨memOpen n, ⟨n, rfl⟩, rfl⟩
  · rintro ⟨_, ⟨n, rfl⟩, rfl⟩
    exact ⟨n, rfl⟩

theorem injective {X : Type*} [TopologicalSpace X] [T0Space X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Injective (embed U) := by
  intro x y hxy
  have hmem : ∀ n, x ∈ U n ↔ y ∈ U n := fun n =>
    show n ∈ embed U x ↔ n ∈ embed U y by rw [hxy]
  refine Inseparable.eq ?_
  refine inseparable_iff_forall_isOpen.mpr ?_
  intro V hV
  constructor
  · intro hx
    obtain ⟨t, ⟨n, rfl⟩, hxt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hx)
    exact htV ((hmem n).mp hxt)
  · intro hy
    obtain ⟨t, ⟨n, rfl⟩, hyt, htV⟩ :=
```

```
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hy)
    exact htV ((hmem n).mpr hyt)

end embed

end DomainTheory.DataTypesAsLattices
```

5

embed.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def embed {X : Type*} (U : ℕ → Set X) (x : X) : Pomega :=
  {n | x ∈ U n}

namespace embed

theorem continuous {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Continuous (embed U) :=
  continuous_generateFrom_iff.2 fun t ⟨n, hn⟩ => by
    subst hn
    change IsOpen (U n)
    exact hbasis.isOpen ⟨n, rfl⟩

theorem inducing {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    IsInducing (embed U) := by
  refine ⟨?_⟩
  rw [hbasis.eq_generateFrom]
  change generateFrom (Set.range U) =
    (generateFrom (Set.range memOpen)).induced (embed U)
  rw [induced_generateFrom_eq]
  congr 1
  ext V
  constructor
  · rintro ⟨n, rfl⟩
    exact ⟨memOpen n, ⟨n, rfl⟩, rfl⟩
  · rintro ⟨_, ⟨n, rfl⟩, rfl⟩
    exact ⟨n, rfl⟩

theorem injective {X : Type*} [TopologicalSpace X] [T0Space X]
```

```
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Injective (embed U) := by
  intro x y hxy
  have hmem : ∀ n, x ∈ U n ↔ y ∈ U n := fun n =>
    show n ∈ embed U x ↔ n ∈ embed U y by rw [hxy]
  refine Inseparable.eq ?_
  refine inseparable_iff_forall_isOpen.mpr ?_
  intro V hV
  constructor
  · intro hx
    obtain ⟨t, ⟨n, rfl⟩, hxt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hx)
    exact htV ((hmem n).mp hxt)
  · intro hy
    obtain ⟨t, ⟨n, rfl⟩, hyt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hy)
    exact htV ((hmem n).mpr hyt)

end embed

end DomainTheory.DataTypesAsLattices
```

6

embed.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def embed {X : Type*} (U : ℕ → Set X) (x : X) : Pomega :=
  {n | x ∈ U n}

namespace embed

theorem continuous {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Continuous (embed U) :=
  continuous_generateFrom_iff.2 fun t ⟨n, hn⟩ => by
    subst hn
    change IsOpen (U n)
    exact hbasis.isOpen ⟨n, rfl⟩

theorem inducing {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
```

```
    IsInducing (embed U) := by
  refine ⟨?_⟩
  rw [hbasis.eq_generateFrom]
  change generateFrom (Set.range U) =
    (generateFrom (Set.range memOpen)).induced (embed U)
  rw [induced_generateFrom_eq]
  congr 1
  ext V
  constructor
  · rintro ⟨n, rfl⟩
    exact ⟨memOpen n, ⟨n, rfl⟩, rfl⟩
  · rintro ⟨_, ⟨n, rfl⟩, rfl⟩
    exact ⟨n, rfl⟩

theorem injective {X : Type*} [TopologicalSpace X] [T0Space X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Injective (embed U) := by
  intro x y hxy
  have hmem : ∀ n, x ∈ U n ↔ y ∈ U n := fun n =>
    show n ∈ embed U x ↔ n ∈ embed U y by rw [hxy]
  refine Inseparable.eq ?_
  refine inseparable_iff_forall_isOpen.mpr ?_
  intro V hV
  constructor
  · intro hx
    obtain ⟨t, ⟨n, rfl⟩, hxt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hx)
    exact htV ((hmem n).mp hxt)
  · intro hy
    obtain ⟨t, ⟨n, rfl⟩, hyt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hy)
    exact htV ((hmem n).mpr hyt)

end embed

end DomainTheory.DataTypesAsLattices
```

7 embed.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function
```

```
def embed {X : Type*} (U : ℕ → Set X) (x : X) : Pomega :=
  {n | x ∈ U n}

namespace embed

theorem continuous {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Continuous (embed U) :=
  continuous_generateFrom_iff.2 fun t ⟨n, hn⟩ => by
    subst hn
    change IsOpen (U n)
    exact hbasis.isOpen ⟨n, rfl⟩

theorem inducing {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    IsInducing (embed U) := by
  refine ⟨?_⟩
  rw [hbasis.eq_generateFrom]
  change generateFrom (Set.range U) =
    (generateFrom (Set.range memOpen)).induced (embed U)
  rw [induced_generateFrom_eq]
  congr 1
  ext V
  constructor
  · rintro ⟨n, rfl⟩
    exact ⟨memOpen n, ⟨n, rfl⟩, rfl⟩
  · rintro ⟨_, ⟨n, rfl⟩, rfl⟩
    exact ⟨n, rfl⟩

theorem injective {X : Type*} [TopologicalSpace X] [T0Space X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Injective (embed U) := by
  intro x y hxy
  have hmem : ∀ n, x ∈ U n ↔ y ∈ U n := fun n =>
    show n ∈ embed U x ↔ n ∈ embed U y by rw [hxy]
  refine Inseparable.eq ?_
  refine inseparable_iff_forall_isOpen.mpr ?_
  intro V hV
  constructor
  · intro hx
    obtain ⟨t, ⟨n, rfl⟩, hxt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hx)
    exact htV ((hmem n).mp hxt)
  · intro hy
    obtain ⟨t, ⟨n, rfl⟩, hyt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hy)
    exact htV ((hmem n).mpr hyt)

end embed

end DomainTheory.DataTypesAsLattices
```

8

embed.lean

```
module

public import Mathlib.Topology.Bases
public import Mathlib.Topology.Defs.Induced
public import Mathlib.Topology.Order
public import Mathlib.Topology.Separation.Basic
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
public import DomainTheory.DataTypesAsLattices.Pomega.eDense
public import DomainTheory.DataTypesAsLattices.Continuous.Basic
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace Topology Function

def embed {X : Type*} (U : ℕ → Set X) (x : X) : Pomega :=
  {n | x ∈ U n}

namespace embed

theorem continuous {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Continuous (embed U) :=
  continuous_generateFrom_iff.2 fun t ⟨n, hn⟩ => by
    subst hn
    change IsOpen (U n)
    exact hbasis.isOpen ⟨n, rfl⟩

theorem inducing {X : Type*} [TopologicalSpace X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    IsInducing (embed U) := by
  refine ⟨?_⟩
  rw [hbasis.eq_generateFrom]
  change generateFrom (Set.range U) =
    (generateFrom (Set.range memOpen)).induced (embed U)
  rw [induced_generateFrom_eq]
  congr 1
  ext V
  constructor
  · rintro ⟨n, rfl⟩
    exact ⟨memOpen n, ⟨n, rfl⟩, rfl⟩
  · rintro ⟨_, ⟨n, rfl⟩, rfl⟩
    exact ⟨n, rfl⟩

theorem injective {X : Type*} [TopologicalSpace X] [T0Space X]
    (U : ℕ → Set X) (hbasis : IsTopologicalBasis (Set.range U)) :
    Injective (embed U) := by
  intro x y hxy
  have hmem : ∀ n, x ∈ U n ↔ y ∈ U n := fun n =>
    show n ∈ embed U x ↔ n ∈ embed U y by rw [hxy]
  refine Inseparable.eq ?_
  refine inseparable_iff_forall_isOpen.mpr ?_
  intro V hV
  constructor
  · intro hx
    obtain ⟨t, ⟨n, rfl⟩, hxt, htV⟩ :=
```

```
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hx)
    exact htV ((hmem n).mp hxt)
  · intro hy
    obtain ⟨t, ⟨n, rfl⟩, hyt, htV⟩ :=
      hbasis.mem_nhds_iff.mp (hV.mem_nhds hy)
    exact htV ((hmem n).mpr hyt)

end embed

end DomainTheory.DataTypesAsLattices
```

9

exists_basicNhhd_subset_of_generateOpen.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

theorem exists_basicNhhd_subset_of_generateOpen {U : Set Pomega}
    (hU : GenerateOpen (Set.range memOpen) U) {x : Pomega} (hx : x ∈ U) :
    ∃ n, e n ⊆ x ∧ basicNhhd n ⊆ U := by
  induction hU generalizing x with
  | basic s hs =>
    obtain ⟨k, rfl⟩ := hs
    refine ⟨2 ^ k, ?_, ?_⟩
    · simpa [memOpen, e.pow2, Set.singleton_subset_iff] using hx
    · rw [← memOpen.eq_basicNhhd]
  | univ =>
    exact ⟨0, by simp [e.zero], by simp [basicNhhd.zero]⟩
  | inter _s _t _hs _ht ihs iht =>
    obtain ⟨n, hn, hnU⟩ := ihs hx.1
    obtain ⟨m, hm, hmU⟩ := iht hx.2
    refine ⟨n ||| m, e.or_of_subset hn hm, ?_⟩
    rw [← basicNhhd.inter]
    exact Set.inter_subset_inter hnU hmU
  | sUnion S _hS ih =>
    obtain ⟨V, hV, hxV⟩ := hx
    obtain ⟨n, hn, hnV⟩ := ih V hV hxV
    exact ⟨n, hn, hnV.trans (Set.subset_sUnion_of_mem hV)⟩

end DomainTheory.DataTypesAsLattices
```

0

exists_basicNhhd_subset_of_generateOpen.lean

```
module
```

```
public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

theorem exists_basicNhhd_subset_of_generateOpen {U : Set Pomega}
    (hU : GenerateOpen (Set.range memOpen) U) {x : Pomega} (hx : x ∈ U) :
    ∃ n, e n ⊆ x ∧ basicNhhd n ⊆ U := by
  induction hU generalizing x with
  | basic s hs =>
    obtain ⟨k, rfl⟩ := hs
    refine ⟨2 ^ k, ?_, ?_⟩
    · simpa [memOpen, e.pow2, Set.singleton_subset_iff] using hx
    · rw [← memOpen.eq_basicNhhd]
  | univ =>
    exact ⟨0, by simp [e.zero], by simp [basicNhhd.zero]⟩
  | inter _s _t _hs _ht ihs iht =>
    obtain ⟨n, hn, hnU⟩ := ihs hx.1
    obtain ⟨m, hm, hmU⟩ := iht hx.2
    refine ⟨n ||| m, e.or_of_subset hn hm, ?_⟩
    rw [← basicNhhd.inter]
    exact Set.inter_subset_inter hnU hmU
  | sUnion S _hS ih =>
    obtain ⟨V, hV, hxV⟩ := hx
    obtain ⟨n, hn, hnV⟩ := ih V hV hxV
    exact ⟨n, hn, hnV.trans (Set.subset_sUnion_of_mem hV)⟩

end DomainTheory.DataTypesAsLattices
```

1

exists_basicNhhd_subset_of_generateOpen.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

theorem exists_basicNhhd_subset_of_generateOpen {U : Set Pomega}
    (hU : GenerateOpen (Set.range memOpen) U) {x : Pomega} (hx : x ∈ U) :
    ∃ n, e n ⊆ x ∧ basicNhhd n ⊆ U := by
  induction hU generalizing x with
  | basic s hs =>
    obtain ⟨k, rfl⟩ := hs
    refine ⟨2 ^ k, ?_, ?_⟩
    · simpa [memOpen, e.pow2, Set.singleton_subset_iff] using hx
```

```
    · rw [← memOpen.eq_basicNhhd]
  | univ =>
    exact ⟨0, by simp [e.zero], by simp [basicNhhd.zero]⟩
  | inter _s _t _hs _ht ihs iht =>
    obtain ⟨n, hn, hnU⟩ := ihs hx.1
    obtain ⟨m, hm, hmU⟩ := iht hx.2
    refine ⟨n ||| m, e.or_of_subset hn hm, ?_⟩
    rw [← basicNhhd.inter]
    exact Set.inter_subset_inter hnU hmU
  | sUnion S _hS ih =>
    obtain ⟨V, hV, hxV⟩ := hx
    obtain ⟨n, hn, hnV⟩ := ih V hV hxV
    exact ⟨n, hn, hnV.trans (Set.subset_sUnion_of_mem hV)⟩

end DomainTheory.DataTypesAsLattices
```

2

exists_basicNhhd_subset_of_generateOpen.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

theorem exists_basicNhhd_subset_of_generateOpen {U : Set Pomega}
    (hU : GenerateOpen (Set.range memOpen) U) {x : Pomega} (hx : x ∈ U) :
    ∃ n, e n ⊆ x ∧ basicNhhd n ⊆ U := by
  induction hU generalizing x with
  | basic s hs =>
    obtain ⟨k, rfl⟩ := hs
    refine ⟨2 ^ k, ?_, ?_⟩
    · simpa [memOpen, e.pow2, Set.singleton_subset_iff] using hx
    · rw [← memOpen.eq_basicNhhd]
  | univ =>
    exact ⟨0, by simp [e.zero], by simp [basicNhhd.zero]⟩
  | inter _s _t _hs _ht ihs iht =>
    obtain ⟨n, hn, hnU⟩ := ihs hx.1
    obtain ⟨m, hm, hmU⟩ := iht hx.2
    refine ⟨n ||| m, e.or_of_subset hn hm, ?_⟩
    rw [← basicNhhd.inter]
    exact Set.inter_subset_inter hnU hmU
  | sUnion S _hS ih =>
    obtain ⟨V, hV, hxV⟩ := hx
    obtain ⟨n, hn, hnV⟩ := ih V hV hxV
    exact ⟨n, hn, hnV.trans (Set.subset_sUnion_of_mem hV)⟩

end DomainTheory.DataTypesAsLattices
```

3

exists_basicNhhd_subset_of_generateOpen.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

theorem exists_basicNhhd_subset_of_generateOpen {U : Set Pomega}
    (hU : GenerateOpen (Set.range memOpen) U) {x : Pomega} (hx : x ∈ U) :
    ∃ n, e n ⊆ x ∧ basicNhhd n ⊆ U := by
  induction hU generalizing x with
  | basic s hs =>
    obtain ⟨k, rfl⟩ := hs
    refine ⟨2 ^ k, ?_, ?_⟩
    · simpa [memOpen, e.pow2, Set.singleton_subset_iff] using hx
    · rw [← memOpen.eq_basicNhhd]
  | univ =>
    exact ⟨0, by simp [e.zero], by simp [basicNhhd.zero]⟩
  | inter _s _t _hs _ht ihs iht =>
    obtain ⟨n, hn, hnU⟩ := ihs hx.1
    obtain ⟨m, hm, hmU⟩ := iht hx.2
    refine ⟨n ||| m, e.or_of_subset hn hm, ?_⟩
    rw [← basicNhhd.inter]
    exact Set.inter_subset_inter hnU hmU
  | sUnion S _hS ih =>
    obtain ⟨V, hV, hxV⟩ := hx
    obtain ⟨n, hn, hnV⟩ := ih V hV hxV
    exact ⟨n, hn, hnV.trans (Set.subset_sUnion_of_mem hV)⟩

end DomainTheory.DataTypesAsLattices
```

4

exists_basicNhhd_subset_of_generateOpen.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

theorem exists_basicNhhd_subset_of_generateOpen {U : Set Pomega}
    (hU : GenerateOpen (Set.range memOpen) U) {x : Pomega} (hx : x ∈ U) :
    ∃ n, e n ⊆ x ∧ basicNhhd n ⊆ U := by
  induction hU generalizing x with
```

```
  | basic s hs =>
    obtain ⟨k, rfl⟩ := hs
    refine ⟨2 ^ k, ?_, ?_⟩
    · simpa [memOpen, e.pow2, Set.singleton_subset_iff] using hx
    · rw [← memOpen.eq_basicNhhd]
  | univ =>
    exact ⟨0, by simp [e.zero], by simp [basicNhhd.zero]⟩
  | inter _s _t _hs _ht ihs iht =>
    obtain ⟨n, hn, hnU⟩ := ihs hx.1
    obtain ⟨m, hm, hmU⟩ := iht hx.2
    refine ⟨n ||| m, e.or_of_subset hn hm, ?_⟩
    rw [← basicNhhd.inter]
    exact Set.inter_subset_inter hnU hmU
  | sUnion S _hS ih =>
    obtain ⟨V, hV, hxV⟩ := hx
    obtain ⟨n, hn, hnV⟩ := ih V hV hxV
    exact ⟨n, hn, hnV.trans (Set.subset_sUnion_of_mem hV)⟩

end DomainTheory.DataTypesAsLattices
```

5

exists_basicNhhd_subset_of_generateOpen.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

theorem exists_basicNhhd_subset_of_generateOpen {U : Set Pomega}
    (hU : GenerateOpen (Set.range memOpen) U) {x : Pomega} (hx : x ∈ U) :
    ∃ n, e n ⊆ x ∧ basicNhhd n ⊆ U := by
  induction hU generalizing x with
  | basic s hs =>
    obtain ⟨k, rfl⟩ := hs
    refine ⟨2 ^ k, ?_, ?_⟩
    · simpa [memOpen, e.pow2, Set.singleton_subset_iff] using hx
    · rw [← memOpen.eq_basicNhhd]
  | univ =>
    exact ⟨0, by simp [e.zero], by simp [basicNhhd.zero]⟩
  | inter _s _t _hs _ht ihs iht =>
    obtain ⟨n, hn, hnU⟩ := ihs hx.1
    obtain ⟨m, hm, hmU⟩ := iht hx.2
    refine ⟨n ||| m, e.or_of_subset hn hm, ?_⟩
    rw [← basicNhhd.inter]
    exact Set.inter_subset_inter hnU hmU
  | sUnion S _hS ih =>
    obtain ⟨V, hV, hxV⟩ := hx
    obtain ⟨n, hn, hnV⟩ := ih V hV hxV
    exact ⟨n, hn, hnV.trans (Set.subset_sUnion_of_mem hV)⟩
```

```
end DomainTheory.DataTypesAsLattices
```

6

exists_basicNhhd_subset_of_generateOpen.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace

theorem exists_basicNhhd_subset_of_generateOpen {U : Set Pomega}
    (hU : GenerateOpen (Set.range memOpen) U) {x : Pomega} (hx : x ∈ U) :
    ∃ n, e n ⊆ x ∧ basicNhhd n ⊆ U := by
  induction hU generalizing x with
  | basic s hs =>
    obtain ⟨k, rfl⟩ := hs
    refine ⟨2 ^ k, ?_, ?_⟩
    · simpa [memOpen, e.pow2, Set.singleton_subset_iff] using hx
    · rw [← memOpen.eq_basicNhhd]
  | univ =>
    exact ⟨0, by simp [e.zero], by simp [basicNhhd.zero]⟩
  | inter _s _t _hs _ht ihs iht =>
    obtain ⟨n, hn, hnU⟩ := ihs hx.1
    obtain ⟨m, hm, hmU⟩ := iht hx.2
    refine ⟨n ||| m, e.or_of_subset hn hm, ?_⟩
    rw [← basicNhhd.inter]
    exact Set.inter_subset_inter hnU hmU
  | sUnion S _hS ih =>
    obtain ⟨V, hV, hxV⟩ := hx
    obtain ⟨n, hn, hnV⟩ := ih V hV hxV
    exact ⟨n, hn, hnV.trans (Set.subset_sUnion_of_mem hV)⟩

end DomainTheory.DataTypesAsLattices
```

7

exists_basicNhhd_subset_of_generateOpen.lean

```
module

public import Mathlib.Topology.Order
public import DomainTheory.DataTypesAsLattices.Continuous.memOpen
import Mathlib.Tactic.Bound.Init
@[expose] public section

namespace DomainTheory.DataTypesAsLattices

open TopologicalSpace
```

```
theorem exists_basicNhhd_subset_of_generateOpen {U : Set Pomega}
    (hU : GenerateOpen (Set.range memOpen) U) {x : Pomega} (hx : x ∈ U) :
    ∃ n, e n ⊆ x ∧ basicNhhd n ⊆ U := by
  induction hU generalizing x with
  | basic s hs =>
    obtain ⟨k, rfl⟩ := hs
    refine ⟨2 ^ k, ?_, ?_⟩
    · simpa [memOpen, e.pow2, Set.singleton_subset_iff] using hx
    · rw [← memOpen.eq_basicNhhd]
  | univ =>
    exact ⟨0, by simp [e.zero], by simp [basicNhhd.zero]⟩
  | inter _s _t _hs _ht ihs iht =>
    obtain ⟨n, hn, hnU⟩ := ihs hx.1
    obtain ⟨m, hm, hmU⟩ := iht hx.2
    refine ⟨n ||| m, e.or_of_subset hn hm, ?_⟩
    rw [← basicNhhd.inter]
    exact Set.inter_subset_inter hnU hmU
  | sUnion S _hS ih =>
    obtain ⟨V, hV, hxV⟩ := hx
    obtain ⟨n, hn, hnV⟩ := ih V hV hxV
    exact ⟨n, hn, hnV.trans (Set.subset_sUnion_of_mem hV)⟩

end DomainTheory.DataTypesAsLattices
```

8

5.6 ContinuousLatticeToNeighborhood

Dependencies. Inside ContinuousLatticeToNeighborhood, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

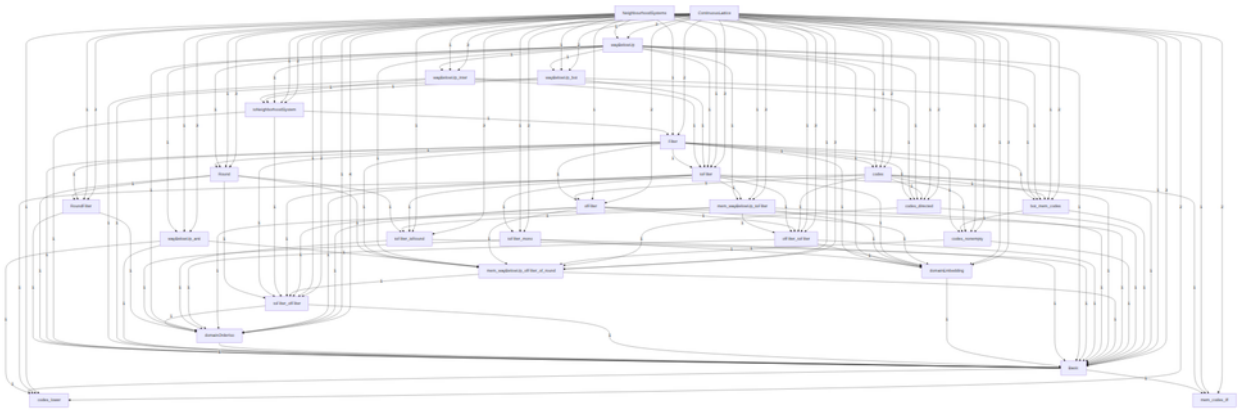

Figure 59: ContinuousLatticeToNeighborhood.

5.7 InfoSysConstructions

Dependencies. Inside InfoSysConstructions, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

Figure 60: InfoSysConstructions.

5.8 InfoSysToIdealCompletion

Dependencies. Inside InfoSysToIdealCompletion, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

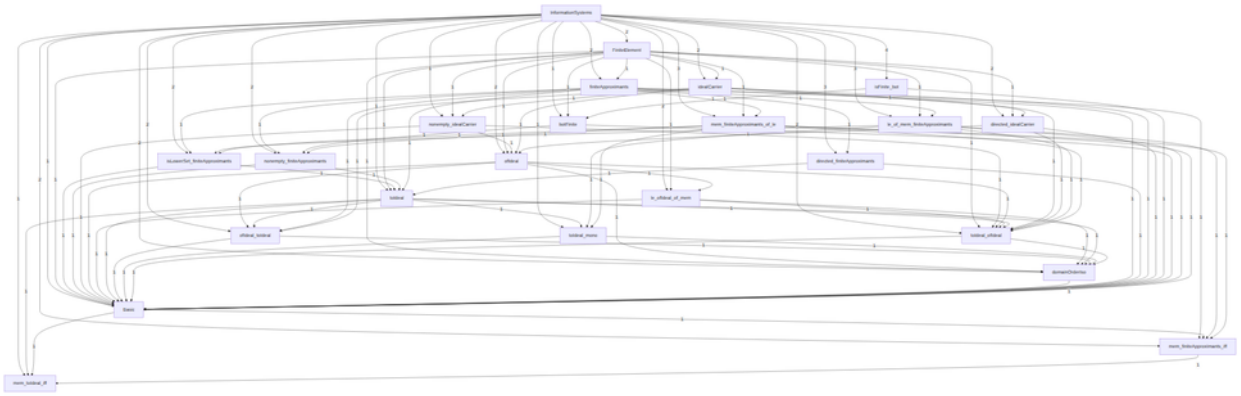

Figure 61: InfoSysToIdealCompletion.

5.9 InfoSysToNeighborhood

Dependencies. Inside InfoSysToNeighborhood, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. BridgeTheorems is the Lean files in that chapter folder, not in a subfolder. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

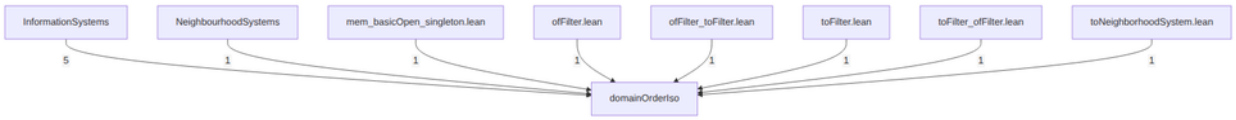

Figure 62: InfoSysToNeighborhood.

5.10 NeighborhoodToInfoSys

Dependencies. Inside NeighborhoodToInfoSys, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. BridgeTheorems is the Lean files in that chapter folder, not in a subfolder. The arrowhead points at the file or folder that imports, and the number is how many direct imports.



Figure 63: NeighborhoodToInfoSys.

5.11 PresentationDomains

Dependencies. Inside PresentationDomains, each box is one Lean file. A box named as another folder in this chapter is that whole folder. A box named as another chapter is that whole chapter. BridgeTheorems is the Lean files in that chapter folder, not in a subfolder. The arrowhead points at the file or folder that imports, and the number is how many direct imports.

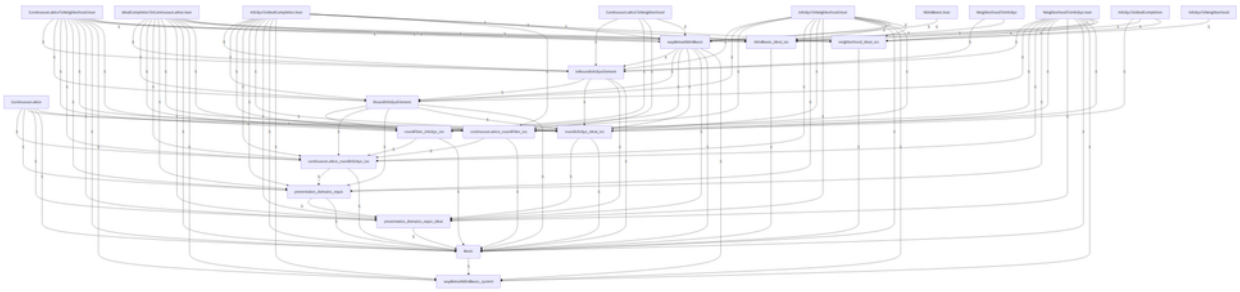

Figure 64: PresentationDomains.

6 Acknowledgments

6.1 AI-assisted development

The human author retains sole responsibility for the mathematical content, the choice of formalization route, and every formal claim in this work. Following standard publisher practice (e.g., COPE guidance on authorship and AI tools [5]), **no large language model is listed as a co-author** — authorship implies an accountability that automated systems cannot bear.

We gratefully acknowledge assistance from the following tools in this revision (auto-generated from `scripts/ai_model_cards.py` when building `arxiv.tex`). Source versions of the four Scott papers and the bridge theorems record their own model cards in their respective writeups under `vendor/`:

- **Cursor Composer 2.5** [6] — routine multi-step work: module scaffolding, dependency-ordered wiring of `DomainTheory/`, documentation and Mermaid blueprints, and medium proof obligations where the strategy was already fixed (`composer-2.5`).
- **Cursor Grok 4.7** [7] — primary agent model for the DomainTheory sessions: domain-theory constructions, inventory design in `arxiv.md`, constructivity audits, and adaptation of portable patterns from prior Scott formalizations. Used here via the Cursor agent environment.
- **Google Gemini 3.8** [8] — exploratory and support passes (typographic conventions, scope decisions, and cross-checks against the narrative inventory).

All definitions, constructivity audits, and final prose were reviewed by the human author, who takes full responsibility for them.

6.2 Artifact availability and reproducibility

The development is at `github.com/catskillsresearch/DomainTheory`. GitHub Actions CI runs `lake build` on `main`.

Locally:

```
lake exe cache get
lake build DomainTheory
```

Sibling packages `scott1972`, `scott1976`, `scott1980`, `scott1982`, and `scott_models` are vendored under `vendor/` (frozen revisions in `vendor/FROZEN.txt`); they are not Lake path dependencies. `arxiv.md` is the durable inventory and proof narrative. Axiom audits: `#print axioms` on the compared names in `comparator.json`.

Build the arXiv PDF / submission zip (Lean Code appendix = GitHub hyperlinks):

```
bash scripts/build_arxiv_tex.sh      # arxiv.md → arxiv.tex + figures/
bash scripts/build_arxiv_pdf.sh      # compile PDF + package dist/arxiv_submit.zip
# or: bash scripts/package_arxiv_submit.sh
```

7 References

References

[1] D. Scott. Continuous lattices, 1972. in F. W. Lawvere (ed.), Toposes, Algebraic Geometry and Logic, Lecture Notes in Mathematics, vol. 274, Springer-Verlag, pp. 97–136. [Also: Tech. Monograph PRG-7, Oxford Univ. Computing Lab., Programming Research Group (1971).].

[2] D. Scott. Lectures on a mathematical theory of computation, 1981. Technical Monograph PRG-19, May 1981, Oxford University Computing Laboratory, Programming Research Group (neighbourhood systems).

[3] D. Scott. Domains for denotational semantics, 1982. ICALP 1982, LNCS 140, Springer, pp. 577–613.

[4] Palomar Registry. entry `PALOMAR-2026-08-25-000003`, version 1, 2026. Verified claim: order isomorphisms relating Scott's three presentations of domains — continuous lattices (1972), neighbourhood systems (PRG-19), and information systems (1982) — including the round identification `D ≃o RoundFilter ≃o RoundInfoSysElement` and the S-expression equation `T ≅ A + (T × T)` as `|T| ≃o |A + (T × T)|` (`SexSys.Element ≃o SexRhs.Element`). https://palomar-registry.org/entry?id=PALOMAR-2026-08-25-000003&version=1.

[5] Committee on Publication Ethics (COPE). Authorship and ai tools: Cope position statement, 2024. 2024. https://publicationethics.org/guidance/cope-position/authorship-and-ai-tools.

[6] Anysphere, Inc. Composer 2.5. Model announcement and documentation, https://cursor.com/blog/composer-2-5; model card as integrated in Cursor, https://cursor.com/docs/models, 2026. accessed 2026.

[7] xAI and Anysphere, Inc. Grok 4.7. Model documentation, https://docs.x.ai/docs/models; Cursor model catalog, https://cursor.com/docs/models, 2026. accessed 2026.

[8] Google DeepMind. Gemini 3.8. Technical documentation and model cards, https://ai.google.dev/gemini-api/docs/models, 2026. accessed 2026.

[9] ed J. C. Abbott. Trends in lattice theory, 1970. Van Nostrand Reinhold Mathematical Studies, vol. 31 (1970).

[10] S. Abramsky and A. Jung. Domain theory, 1994. In Handbook of Logic in Computer Science, Vol. 3, Oxford University Press, 1994.

[11] M. Aiello L. Aiello and R. W. Weyhrauch. The semantics of pascal in lcf, 1974. Artificial Intelligence Lab. Memo. AIM-221, Stanford Univ., Stanford, Calif.

[12] S. Alagić. Categorical theory of tree processing, 1974. Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 80–99.

[13] P. Alexandroff and H. Hopf. Topologie i, 1935. Springer-Verlag, (1935).

[14] M. A. Arbib and E. G. Manes. Fuzzy morphisms in automata theory, 1974. 1974a; , Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 98–105.

[15] M. A. Arbib and E. G. Manes. Categorists' view of automata and systems, 1974. 1974b; , Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 62–79.

[16] M. A. Arbib and E. G. Manes. Basic concepts of category theory applicable to computation and control, 1974. 1974c; , Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 2–41.

[17] J. W. de Bakker. Semantics of programming languages, 1969. Advances in Information Systems Science, vol. 2, Plenum Press, New York.

[18] J. W. de Bakker and D. Scott. A theory of programs, 1969. Unpublished notes, IBM Seminar, Vienna, 1969.

[19] J. W. de Bakker. Recursive procedures, 1971. 1971a; , Mathematical Centre Tracts, vol. 24, Amsterdam.

[20] J. W. de Bakker. Recursion, induction and symbol manipulation, 1971. 1971b; , Proc. MC-25 Informatica Symposium, Mathematical Centre Tracts, vol. 38, Amsterdam.

[21] J. W. de Bakker and W. P. de Roever. A calculus for recursive program schemes, 1972. Proc. IRIA Colloq. on Automata, North-Holland, Amsterdam.

[22] J. W. de Bakker and L. G. L. T. Meertens. On the completeness of the inductive assertion method, 1973. Mathematical Centre Rep. IW 12/72, Amsterdam.

[23] J. W. de Bakker and L. G. L. T. Meertens. Fixed points in programming theory, 1974. Foundations of Computer Science, J. W. de Bakker, ed., Mathematical Centre Tract, vol. 63, Amsterdam.

[24] H. P. Barendregt. Some extensional term models for combinatory logics and λ-calculi, 1971. Ph.D. thesis, Univ. of Utrecht.

[25] H. Bekić. Definable operations in general algebra, and the theory of automata and flowcharts, 1969. Rep., IBM Lab., Vienna.

[26] H. Bekić. Towards a mathematical theory of processes, 1971. Tech. Rep. TR 25.125, IBM Lab., Vienna.

[27] H. Bekić et al. A formal definition of a pl/i subset, parts i and ii, 1974. Tech. Rep. TR 25.139, IBM Lab., Vienna.

[28] E. Binz and H. H. Keller. Funktionenräume in der kategorie der limesräume, 1966. Annales Academiae Scientiarum Fennicae, Series A, I. Mathematica, no. 383 (1966), 21 pp.

[29] R. S. Bird. Unsolvability of the inclusion problem for dbs schemas, 1974. Rep. RCS22, Dept. of Computer Sci., Univ. of Reading.

[30] G. Birkhoff. Lattice theory, 1967. 3rd ed., American Mathematical Society Colloquium Publications, vol. 25, Providence, R.I.

[31] A. Blikle. Algorithmically definable functions: A contribution towards the semantics of programming languages, 1971. Dissertationes Math. Rozprawy Mat., 85.

[32] A. Blikle. Equational languages, 1972. Information Control, pp. 134–147.

[33] A. Blikle and A. Mazurkiewicz. An algebraic approach to the theory of programs, algorithms, languages and recursiveness, 1972. Proc. Internat. Sympos. and Summer School on the Mathematical Foundations of Computer Sci., Warsaw-Jabłonna.

[34] A. Blikle. An algebraic approach to programs and their computations, 1973. Proc. Symp. and Summer School on the Mathematical Foundations of Computer Sci., High Tatras, Czechoslovakia.

[35] A. Blikle. Proving programs by sets of computations, 1974. Proc. 3rd Symp. on the Mathematical Foundation of Computer Sci., Jadwisin, Poland; Lecture Notes in Computer Science, Springer-Verlag, Berlin, 1974.

[36] C. Böhm. The cuch as a formal and descriptive language, 1966. Formal Language Description Languages for Computer Programming, T. B. Steel, ed., North-Holland, Amsterdam, pp. 179–197.

[37] C. Böhm. Alcune proprietà delle forme β-η-normali nel λ-κ-calcolo, 1968. Consiglio Nazionale delle Ricerche: Pubblicazione 696 dell' Istituto per le Applicazioni del Calcolo, Roma.

[38] C. Böhm. λ-calculus and computer science theory, 1975. Proc. Rome Symp., March 1975, Lecture Notes in Computer Science, vol. 37, Springer-Verlag, Berlin.

[39] R. M. Burstall. Proving properties of programs by structural induction, 1969. Comput. J., 12, pp. 41–48.

[40] R. M. Burstall. Some techniques for proving the correctness of programs which alter data structures, 1972. 1972a; , Machine Intelligence vol. 7, B. Meltzer and D. Michie, eds., Edinburgh, pp. 23–50.

[41] R. M. Burstall. An algebraic description of programs with assertions, verification and simulation, 1972. 1972b; , Proc. ACM Conf. on Proving Assertions about Programs, Las Cruces, New Mexico, pp. 7–14.

[42] R. Burstall and J. W. Thatcher. The algebraic theory of recursive program schemes, 1974. Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 154–160.

[43] J. M. Cadiou. Recursive definitions of partial functions and their computations, 1973. Ph.D. thesis, Computer Sci. Dept., Stanford Univ., Stanford, Calif.

[44] J. M. Cadiou and J. J. Levy. Mechanizable proofs about parallel processes, 1973. Presented at the 14th Ann. Symp. on Switching and Automata Theory.

[45] J. W. Case. Enumeration reducibility and the partial degrees, 1971. Ann. Math. Logic, 2, pp. 419–440.

[46] E. Čech. Topological spaces, 1966. (revised by Z. Frolík and M. Katětov), Prague.

[47] A. K. Chandra and Z. Manna. On the power of programming features, 1973. Artificial Intelligence Memo. AIM-185, Stanford Univ., Stanford, Calif.

[48] A. K. Chandra. Degrees of translatability and canonical forms in program schemas part i, 1974. IBM Res. Rep. RC4733, Yorktown Heights, N.Y.

[49] A. K. Chandra. The power of parallelism and nondeterminism in programming, 1974. 1974a; , IBM Res. Rep. RC4776, Yorktown Heights, N.Y.

[50] A. K. Chandra. Generalized program schemas, 1974. 1974b; , IBM Res. Rep. RC4827, Yorktown Heights, N.Y.

[51] A. Church. The calculi of λ-conversion, 1951. Annals of Mathematical Studies, vol. 6, Princeton University Press, Princeton, N.J.

[52] M. J. Clint. Program proving: Co-routines, 1972. Acta Informatica, 2, pp. 50–63.

[53] R. C. Constable and D. Gries. On classes of program schemata, 1972. this Journal, 1, pp. 66–118.

[54] D. C. Cooper. The equivalence of certain computations, 1966. Comput. J., 9, pp. 45–52.

[55] B. Courcelle and J. Vuillemin. Complétude d'un système formel pour des équations récursives simples, 1974. Compte-Rendu du Colloque de Paris.

[56] B. Courcelle and J. Vuillemin. Semantics and axiomatics of a simple recursive language, 1974. Rapport Laboria, vol. 60, IRIA; Also: 6th Ann. ACM Symp. on the Theory of Computing, Seattle, Washington.

[57] G. Kahn B. Courcelle and J. Vuillemin. Algorithmes d'équivalence pour des équations récursives simples, 1974. Proc. 2nd Colloq. on Automata Languages and Programming, Saarbrücken; Lecture Notes in Computer Science, Springer-Verlag, Berlin, pp. 213–220.

[58] H. B. Curry and R. Feys. Combinatory logic, 1958. vol. 1, North-Holland, Amsterdam.

[59] J. R. Hindley H. B. Curry and J. Seldin. Combinatory logic, 1971. vol. 2, North-Holland, Amsterdam.

[60] M. Davis. Computability and unsolvability, 1958. McGraw-Hill, New York.

[61] E. W. Dijkstra. Notes on structured programming, 1972. Structural Programming, C. A. R. Hoare, E. W. Dijkstra and O. J. Dahl, Academic Press, New York.

[62] E. W. Dijkstra. A simple axiomatic basis for programming language constructs, 1974. Indag. Math., 36, pp. 1–15.

[63] E. W. Dijkstra. A discipline of programming, 1976. Prentice-Hall, Englewood Cliffs, N.J., to appear.

[64] J. Donahue. Scottery child's guide no. 1, 1974. Dept. of Comput. Sci., Univ. of Toronto.

[65] B. N. Duong. A high level, variable free calculus for recursive programming, 1974. Comput. Sci. Dept. Rep. CS 74 03, Univ. of Waterloo.

[66] S. Eilenberg and C. C. Elgot. Recursiveness, 1970. Academic Press, New York.

[67] S. Eilenberg and C. C. Elgot. Automata, languages and machines, 1974. vol. A, Academic Press, New York (vol. B in press).

[68] A. Robinson C. C. Elgot and J. D. Rutledge. Multiple control computer models, 1966. IBM Res. Rep. RC 1622, Yorktown Heights, N.Y.

[69] C. C. Elgot. Abstract algorithms and diagram closure, 1967. IBM Res. Rep. RC 1750, Yorktown Heights, N.Y.

[70] C. C. Elgot. Algebraic theories and program schemes, 1971. Symposium on Semantics of Algorithmic Languages, E. Engeler, ed., Lecture Notes in Mathematics, vol. 188, Springer-Verlag, New York.

[71] M. H. van Emden and R. A. Kowalski. The semantics of predicate logic as a programming language, 1974. Memo. no. 83 (MIP-R-103), Dept of Machine Intelligence, Univ. of Edinburgh.

[72] E. Engeler. Algorithmic properties of structures, 1967. Mathematical Systems Theory, 1, pp. 183–195.

[73] E. Engeler. Formal languages: Automata and structures, 1968. Lectures in Advanced Mathematics, Markham.

[74] E. Engeler. Algorithmic logic, 1974. Foundations of Computer Science, J. W. de Bakker, ed., Mathematical Centre Tract MCT 63, Amsterdam.

[75] J. Engelfriet. Simple program schemes and formal languages, 1974. Springer Lecture Notes in Computer Science, vol. 20.

[76] J. Engelfriet and E. M. Schmidt. Io and oi, 1975. DAIMI PB-47, Matematisk Institut, Aarhus Universitet, Datalogisk Afdeling, Denmark.

[77] Ju. L. Ershov. Computable numerations of morphisms, 1971. Algebra and Logic, 10, pp. 247–308.

[78] Ju. L. Ershov. Computable functions of finite types, 1972. 1972a; Algebra and Logic, 11, pp. 367–437.

[79] Ju. L. Ershov. Everywhere defined (total) continuous functionals, 1972. 1972b; Algebra and Logic, 11, pp. 656–665.

[80] Ju. L. Ershov. Continuous lattices and a-spaces, 1972. 1972d; , Dokl. Akad. Nauk USSR, 207, pp. 523–526.

[81] Ju. L. Ershov. Theory of a-spaces, 1972. 1972e; , Algebra and Logic, 12, pp. 369–416.

[82] Ju. L. Ershov. Theorie der numerierungen, 1973. Veb Deutscher Verlag der Wissenschaften, Berlin.

[83] M. J. Fischer. λ-calculus schemata, 1972. Proc. ACM Conf. Proving Assertions about Programs, Las Cruces, N.M., pp. 104–109.

[84] A. E. Fischer and M. J. Fischer. Mode modules as representations of domains, 1973. Proc. ACM Symp. on Principles of Programming Languages, Boston, pp. 139–143.

[85] R. W. Floyd. Assigning meanings to programs, 1967. Proc. Symp. in Appl. Math., vol. 19, Mathematical Aspects of Computer Science, J. T. Schwartz, ed., pp. 33–41.

[86] M. M. Fokkinga. Inductive assertion patterns for recursive procedures, 1974. Compte-Rendu de Colloque de Paris.

[87] R. M. Friedberg and H. R. Rogers. Reducibility and completeness for sets of integers, 1959. Z. Math. Logik Grundlagen Math., 5, pp. 117–125.

[88] H. Friedman. Algorithmic procedures, generalized turing algorithms, and elementary recursion theory, 1971. Logic Colloquium 1969, North-Holland, Amsterdam, pp. 361–389.

[89] S. J. Garland and D. C. Luckham. Translating recursion schemes into program schemes, 1972. Proc. ACM Conf. on Proving Assertions about Programs, Las Cruces, N.M., pp. 83–96.

[90] H. Gericke. Lattice theory, 1966. Harrap.

[91] G. Gierz et al. Continuous lattices and domains, 2003. Cambridge University Press, 2003.

[92] J. A. Goguen. l-fuzzy sets, 1967. J. Math. Anal. Appl., 18, pp. 145–174.

[93] J. A. Goguen. Categories of l-sets, 1969. Bull. Amer. Math. Soc., 75, pp. 524–622.

[94] J. A. Goguen. On homomorphisms, simulations, correctness, subroutines and termination for programs and program schemes, 1972. Proc. 13th IEEE Conf. on Switching and Automata Theory, pp. 52–60.

[95] J. A. Goguen. Semantics of computation, 1974. Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 234–249.

[96] J. A. Goguen et al. Initial algebra semantics, 1975. IBM Res. Rep. RC 5243, Yorktown Heights, N.Y.

[97] M. J. C. Gordon. Models of pure lisp, 1973. 1973a; , Experimental Programming Rep. 31, School of Artificial Intelligence, Univ. of Edinburgh. (Also Ph.D. thesis, Evaluation and denotation of pure LISP programs: A worked example in semantics.).

[98] M. J. C. Gordon. An extended abstract of "models of pure lisp", 1973. 1973b; , Memo. SAI-RM-7, School of Artificial Intelligence, Univ. of Edinburgh.

[99] M. J. C. Gordon. Operational reasoning and denotational semantics, 1975. 1975a; , Artificial Intelligence Memo. 264, Stanford Univ., Stanford, Calif.

[100] M. J. C. Gordon. Towards a semantic theory of dynamic binding, 1975. 1975b; , Artificial Intelligence Memo. 265, Stanford Univ., Stanford, Calif.

[101] G. Grätzer. Universal algebra, 1968. Van Nostrand, New York.

[102] I. Guessarian. Sur une réduction des schémas de programmes polyadiques à des schémas monadiques et ses applications, 1974. Compte-Rendu de Colloque de Paris.

[103] L. Gutteridge. Some results on enumeration reducibility, 1971. Ph.D. dissertation, Simon Fraser Univ., Burnaby, B.C., Canada.

[104] B. Lercher J. R. Hindley and J. P. Seldin. Introduction to combinatory logic, 1972. London Mathematical Society Lecture Note Series, vol. 7, Cambridge University Press, Cambridge, England.

[105] J. R. Hindley and G. Mitschke. Some remarks about the connections between combinatory logic and axiomatic recursion theory, 1975. Preprint 203, Fachbereich Mathematik, Technische Hochschule Darmstadt.

[106] P. Hitchcock and D. M. R. Park. Induction rules and proofs of termination, 1972. Proc. Colloques IRIA, Theorie des Automates des Languages et de la Programmation.

[107] P. Hitchcock. An approach to formal reasoning about programs, 1974. Ph.D. thesis, Univ. of Warwick, England.

[108] C. A. R. Hoare. An axiomatic basis of computer programming, 1969. Comm. ACM, 12, pp. 576–580, 583.

[109] C. A. R. Hoare. Proof of a program: Find, 1971. 1971a; , Comm. ACM, 14, pp. 39–45.

[110] C. A. R. Hoare. Procedures and parameters: An axiomatic approach, 1971. 1971b; , Symposium on Semantics of Programming Languages, E. Engeler, ed., Lecture Notes in Mathematics, vol. 188, Springer-Verlag, New York, pp. 102–116.

[111] C. A. R. Hoare. Notes on data structuring, 1972. Structured Programming, C. A. R. Hoare, E. W. Dijkstra and O. J. Dahl, Academic Press, New York.

[112] C. A. R. Hoare and N. Wirth. An axiomatic definition of the programming language pascal, 1972. Bericht der Fachgruppe Computer-Wissenschaften 6, Eidgenössische Technische Hochschule, Zürich.

[113] C. A. R. Hoare and P. Lauer. Consistent and complementary formal theories of the semantics of programming languages, 1974. Acta Informatica, 3, pp. 135–153.

[114] C. Hosono and M. Sato. A solution to scott's problem: "do the retracts in $p\omega$ form a continuous lattice?", 1975. Research Inst. for Mathematical Sci., Kyoto (preprint).

[115] G. Hotz. Eindeutigkeit und mehrdeutigkeit formaler sprachen, 1966. Electron. Informationsverarbeit. Kybernetik (Berlin), 2, pp. 235–246.

[116] J. M. E. Hyland. Recursion theory on the countable functionals, 1975. 1975a; , D. Phil. thesis, Oxford Univ., Oxford, England.

[117] J. M. E. Hyland. A survey of some useful partial order relations in terms of the lambda calculus, 1975. 1975b; , Proc. Conf. on λ-Calculus and Computer Science Theory, Rome, pp. 83–95.

[118] J. M. E. Hyland. A syntactic characterization of the equality in some models for the lambda calculus. to appear; , J. London Math. Soc.

[119] Y. I. Ianov. The logical scheme of algorithms, 1970. Problems in Cybernetics, vol. 1, Pergamon Press, New York.

[120] S. Igarashi. Admissibility of fixed point induction in first order logic of typed theories, 1972. Artificial Intelligence Memo. AIM-168, Computer Sci. Dept., Stanford Univ., Stanford, Calif.

[121] K. Indermark. Gleichungsdefinierbarkeit in relationalstrukturen, 1974. Habilitationsschrift, Mathematisch-Naturwissenschaftlichen Fakultät der Rheinischen Freidrich-Wilhelms-Universatat, Bonn, W. Germany.

[122] C. B. Jones. Mathematical semantics of goto: Exit formulation and its relation to continuations, 1974. preprint.

[123] G. Kahn. A preliminary theory of parallel programs, 1973. Rapport Laboria IRIA.

[124] D. M. Kaplan. Regular expressions and the equivalence of programs, 1969. J. Comput. System Sci., 3, pp. 361–385.

[125] R. M. Karp and R. E. Miller. Parallel program schemata, 1969. J. Comput. System Sci., 3, pp. 147–195.

[126] J. L. Kelley. General topology, 1955. Van Nostrand, (1955).

[127] D. J. Kfoury. Comparing algebraic structures up to algorithmic equivalence, 1972. Automata, Languages and Programming, M. Nivat, ed., North-Holland, Amsterdam, pp. 253–263.

[128] D. J. Kfoury. Translatability of schemas over restricted interpretations, 1974. J. Comput. System Sci., 8, pp. 387–408.

[129] S. C. Kleene. Introduction to metamathematics, 1950. Van Nostrand, New York.

[130] B. Knaster. Un théorème sur les fonctions d'ensembles, 1928. Ann. Soc. Polon. de Math., 8, pp. 133–134.

[131] P. J. Landin. The mechanical evaluation of expressions, 1964. Comput. J., 6, pp. 308–320.

[132] P. J. Landin. A correspondence between algol 60 and church's lambda notation, 1965. Comm. ACM, 8, pp. 89–101.

[133] P. J. Landin. A λ-calculus approach, 1966. 1966a; , Advances in Programming and Non-numerical Computation, L. Fox, ed., Pergamon Press, New York, pp. 97–141.

[134] P. J. Landin. A formal description of algol 60, 1966. 1966a; , Formal Language Description Languages for Computer Programming, T. B. Steel, ed., North-Holland, Amsterdam, pp. 266–294.

[135] P. J. Landin. The next 700 programming languages, 1966. 1966b; , Comm. ACM, 9, pp. 157–164.

[136] P. J. Landin. A program/machine symmetric automata theory, 1969. Machine Intelligence, vol. 5, B. Meltzer and D. Michie, eds., Edinburgh University Press, pp. 99–120.

[137] P. J. Landin and R. M. Burstall. Programs and their proofs: An algebraic approach, 1969. Machine Intelligence, vol. 4, American Elsevier, New York, pp. 17–44.

[138] J. Leszczykowski. A theorem on resolving equations in the space of languages, 1971. Bull. Acad. Polon. Sci. Sér. Sci. Math. Astronom. Phys., 19, pp. 967–970.

[139] C. H. Lewis and B. K. Rosen. Recursively defined data types, parts i and ii, 1973. 1973–74; IBM Res. Reps. RC 4429 (1973), RC 4713 (1974), Yorktown Heights, N.Y.

[140] B. Liskov and S. Zilles. An approach to abstraction, 1973. Group Memo. 88, Project MAC, Mass. Inst. of Tech., Cambridge, Mass.

[141] D. M. R. Park D. Luckham and M. Paterson. On formalized computer programs, 1970. J. Comput. System Sci., 4, pp. 220–249.

[142] S. Mac Lane. Categories for the working mathematician, 1972. Springer-Verlag, New York.

[143] E. Manes. Category theory applied to computation and control, 1974. Proc. 1st Internat. Symp. Math. Dept. and the Dept. of Computer and Information Sci., Univ. Mass., Amherst. Also: Lecture Notes in Computer Science, vol. 26, Springer-Verlag, New York.

[144] Z. Manna. The correctness of programs, 1969. J. Comput. System Sci., 3, pp. 119–127.

[145] Z. Manna and A. Pnueli. Formalization of properties of functional programs, 1970. J. Assoc. Comput. Mach., 17, pp. 555–569.

[146] Z. Manna and J. McCarthy. Properties of programs and partial function logic, 1970. Machine Intelligence 5, B. Meltzer and D. Michie, eds., Edinburgh University Press, pp. 27–38.

[147] Z. Manna and A. Pnueli. Axiomatic approach to total correctness of programs, 1972. Artificial Intelligence Lab. Memo. AIM-210, Stanford Univ., Stanford, Calif.

[148] Z. Manna and J. M. Cadiou. Recursive definitions of partial functions and their computations, 1972. Proc. ACM Conf. on Proving Assertions about Programs, Las Cruces, N.M., pp. 58–65.

[149] Z. Manna and J. Vuillemin. Fixpoint approach to the theory of computation, 1972. Comm. ACM, 15, pp. 528–536.

[150] Z. Ness Z. Manna and J. Vuillemin. Inductive methods for proving properties of programs, 1972. Proc. ACM Conf. on Proving Assertions about Programs, Las Cruces, N.M., pp. 27–50.

[151] Z. Manna. Mathematical theory of computation, 1974. McGraw-Hill, New York.

[152] G. Markowsky. Categories of chain-complete posets, 1974. RC 5100, Comput. Sci. Dept. IBM T. J. Watson Research Center, Yorktown Heights, N.Y.

[153] G. Markowsky. Chain-complete posets and directed sets with applications, 1974. RC 5024, IBM T. J. Watson Research Center, Yorktown Heights, N. Y.

[154] A. Mazurkiewicz. Proving algorithms by tail functions, 1971. Working Paper for IFIP WG2.2, Feb. 1970. Since published in: Information and Control, 18 (1971), pp. 220–226.

[155] A. Mazurkiewicz. Proving properties of processes, 1973. PRACE CO PAN-CC PAS Reports, vol. 134, Warsaw.

[156] J. McCarthy. The lisp 1.5 programmers' manual, 1962. MIT Press, Cambridge, Mass.

[157] J. McCarthy. A basis for a mathematical theory of computation, 1963. 1963a; , Computer Programming and Formal Systems, D. Braffort and D. Hirshberg, eds., North-Holland, Amsterdam, pp. 33–70.

[158] J. McCarthy. Towards a mathematical science of computation, 1963. 1963b; , Information Processing 1962, Proc. IFIP Congress 1962, C. M. Poppleworth, ed., North-Holland, Amsterdam, pp. 21–28.

[159] J. McCarthy. A formal description of a subset of algol, 1966. Formal Language Description Languages for Computer Programming, R. B. Steel, ed., North-Holland, Amsterdam, pp. 1–12.

[160] J. McCarthy and J. Painter. Correctness of a computer for arithmetic expressions, 1967. Mathematical Aspects of Computer Science, J. T. Schwartz, ed., Proc. of a Symposium in Applied Mathematics, vol. 19, pp. 33–41.

[161] E. Michael. Topologies on spaces of subsets, 1951. Transactions of the American Mathematical Society, vol. 77 (1951), pp. 152-182.

[162] R. E. Milne. The formal semantics of computer languages and their implementations, 1974. Ph.D. thesis, Cambridge Univ., Cambridge, England. [Also: Technical Monograph PRG-13, Oxford Univ. Computing Lab., Programming Research Group].

[163] R. Milner. Program schemes and recursive function theory, 1969. Machine Intelligence 5, B. Meltzer and D. Michie, eds., Edinburgh University Press, pp. 39–58.

[164] R. Milner. Algebraic theory of computable polyadic functions, 1970. 1970a; , Computer Sci. Memo., vol. 12, University College, Swansea.

[165] R. Milner. Equivalences on program schemes, 1970. 1970b; , J. Comput. System Sci., 4, pp. 205–219.

[166] R. Milner. Implementation and application of scott's logic for computable functions, 1972. Proc. ACM Conf., Las Cruces, N.M., pp. 1–6.

[167] R. Milner and R. Weyhrauch. Proving compiler correctness in a mechanized logic, 1972. Machine Intelligence, 7, pp. 51–72.

[168] R. Milner. Models of lcf, 1973. Artificial Intelligence Memo. AIM-186, Computer Sci. Dept., Stanford Univ., Stanford, Calif.

[169] R. Milner. An approach to the semantics of parallel programs, 1973. 1973a; , Proc. Convegno di Informatica Teorica, Instituto di Elaborazione delle Informazione, Pisa, Italy.

[170] R. Milner. Processes: A mathematical model of computing agents, 1973. 1973b; , Proc. Colloq in Mathematical Logic, Bristol, England.

[171] J. H. Morris. λ-calculus models of programming languages, 1968. Ph.D. thesis, Sloan School of Management, MIT MAC Reprint TR-57, Mass. Inst. of Tech., Cambridge, Mass.

[172] F. Lockwood Morris. The next 700 programming language descriptions, 1970. Computer Center, Univ. of Essex (typescript).

[173] J. H. Morris. Another recursion induction principle, 1971. Comm. ACM, 14, pp. 351–354.

[174] F. Lockwood Morris. Correctness of translations of programming languages, 1972. Computer Sci. Memo. CS 72-303, Stanford Univ., Stanford, Calif.

[175] J. H. Morris. A correctness proof using recursively defined functions, 1972. Formal Semantics of Programming Languages, R. Rustin, ed., Prentice-Hall, Englewood Cliffs, N.J., pp. 107–224.

[176] F. Lockwood Morris. Advice on structuring compilers and proving them correct, 1973. Proc. SIGACT/SIGPLAN Symp. on Principles of Programming Languages, Boston, pp. 144–152.

[177] J. H. Morris. Types are not sets, 1973. Proc. ACM Symp. on Principles of Programming Languages, Boston, pp. 120–124.

[178] J. Morris and R. Nakajima. Mechanical characterisation of the partial order in lattice models of λ-calculus, 1973. Tech. Rep. 18, Univ. of Calif., Berkeley.

[179] P. D. Mosses. The mathematical semantics of algol 60, 1974. Tech. Monograph PRG-12, Oxford Univ. Computing Lab., Programming Research Group.

[180] P. D. Mosses. The semantics of semantic equations, 1975. 1975a; , Mathematical Foundations of Computer Science, Goos and Hartmanis, eds., Lecture Notes in Computer Science, vol. 28, Springer-Verlag, New York, pp. 409–422.

[181] P. D. Mosses. Mathematical semantics and compiler generation, 1975. 1975b; , Thesis, Oxford Univ., Oxford, England.

[182] J. Myhill and J. C. Shepherdson. Effective operations on partial recursive functions, 1955. Z. Math. Logik Grundlagen Math., 1, pp. 310–317.

[183] R. Nakajima. Infinite normal forms for λ-calculus, 1975. λ-Calculus and Computer Science Theory, C. Böhm, ed., Springer-Verlag, Berlin, pp. 62–82.

[184] A. Nerode. Some stone spaces and recursion theory, 1959. Duke Mathematical Journal, vol. 26, pp. 397–406.

[185] M. Nivat. Langages algébriques sur le magma libre et sémantique des schémas de programmes, 1972. Proc. IRIA Symposium on Automata Formal Languages and Programming, North-Holland, Amsterdam.

[186] D. C. Oppen. On logic and program verification, 1975. Tech. Rep. 82, Dept. Computer Sci., Univ. of Toronto.

[187] D. M. R. Park. Fixpoint induction and proofs of program properties, 1970. 1970a; , Machine Intelligence, 5, B. Meltzer and D. Michie, eds., American Elsevier, New York, pp. 59–78.

[188] D. M. R. Park. Notes on a formalism for reasoning about schemes, 1970. 1970b; , Univ. of Warwick, unpublished notes.

[189] D. M. R. Park. The y combinator scott's lambda-calculus models, 1970. 1970c; , Univ. of Warwick, unpublished notes.

[190] D. M. R. Park. Finiteness is mu-ineffable, 1970. 1970d; , Theory of Computation Report, No. 3, Dept. of Computer Sci., Univ. of Warwick (1974).

[191] M. S. Paterson. Program schemata, 1963. Machine Intelligence, 3, D. Michie, ed., American Elsevier, New York, pp. 19–32.

[192] M. S. Paterson and C. S. Hewitt. Comparative schematology, 1970. Record of Project MAC Conf. on Concurrent Systems and Parallel Computation, Association for Computing Machinery, New York, pp. 119ff.

[193] R. Platek. New foundations for recursion theory, 1964. Thesis, Stanford Univ., Stanford, Calif., unpublished.

[194] G. D. Plotkin. A set-theoretical definition of application, 1972. Memo. MIP-R-95, School of Artificial Intelligence, University of Edinburgh.

[195] G. D. Plotkin. The λ-calculus is ω-incomplete, 1973. 1973a; , Res. Memo. SAI-RM-2, School of Artificial Intelligence, Univ. of Edinburgh.

[196] G. D. Plotkin. Lambda-definability and logical relations, 1973. 1973b; , Memo. SAI-RM-4, School of Artificial Intelligence, Univ. of Edinburgh.

[197] G. D. Plotkin. Call-by-name, call-by-value and the λ-calculus, 1973. 1973c; , J. Res. Memo. SAI-RM-6, School of Artificial Intelligence, Univ. of Edinburgh.

[198] G. D. Plotkin. A powerdomain construction, 1975. Dept. of Artificial Intelligence Res. Rep. 3, Univ. of Edinburgh.

[199] H. Rasiowa. On ω-1973.-valued algorithmic logic and related problems*, Supplement to Proc. Symp. and Summer School on Mathematical Foundations of Computer Sci., High Tatras, Czechoslovakia.

[200] P. Raulefs. The overtyped lambda calculus, 1975. 1975a; , Interner Bericht Nr. 2, Institut für Informatik, Universität Karlsruhe.

[201] P. Raulefs. Standard models of the overtyped lambda-calculus, 1975. 1975b; , Interner Bericht Nr. 3, Institut für Informatik, Universität Karlsruhe.

[202] R. R. Redziejowski. The theory of general events and its application to parallel programming, 1972. T.P. 18.220 IBM Nordic Laboratory, Sweden.

[203] J. C. Reynolds. Gedanken: A simple typeless language, 1969. Reprint 7621, Argonne National Laboratory, Argonne, Ill.

[204] J. C. Reynolds. Definitional interpreters for higher order programming languages, 1972. 1972a; , Proc. ACM 25th Nat. Conf., Boston, vol. 2, pp. 717–740.

[205] J. C. Reynolds. Notes on a lattice-theoretic approach to the theory of computation, 1972. 1972b; , Systems and Information Sci. Dept., Syracuse Univ., Syracuse, N.Y.

[206] J. C. Reynolds. On the relation between direct and continuation semantics, 1974. 1974a; , Proc. 2nd Colloq. on Automata, Languages and Programming, Saarbrücken, Lecture Notes in Computer Science, vol. 14, Springer-Verlag, Berlin, pp. 141–156.

[207] J. C. Reynolds. Semantics of the lattice of flow diagrams, 1974. 1974b; , Systems and Information Science Dept., Syracuse Univ., Syracuse, N.Y. (preprint).

[208] J. C. Reynolds. On the interpretations of scott's domains. to appear; Symposia Mathematica.

[209] J. C. Reynolds. Towards a theory of type structure. to appear; , Colloq. on Programming, Paris, April 1974, Lecture Notes in Computer Science, Springer-Verlag, Berlin.

[210] W. P. de Roever. Recursion and parameter mechanisms: An axiomatic approach, 1974. 1974a; Proc. 2nd Colloq. on Automata Languages and Programming, Saarbrucken, Lecture Notes in Computer Science, vol. 14, Springer-Verlag, Berlin, pp. 34–65.

[211] W. P. de Roever. Operational, mathematical and axiomatized semantics for recursive procedures and data structures, 1974. 1974b; , Mathematical Centre Report ID/1, Amsterdam.

[212] H. R. Rogers. Theory of recursive functions and effective computability, 1967. McGraw-Hill, New York.

[213] B. K. Rosen. Tree-manipulating systems and church-rosser theorems, 1973. J. Assoc. Comput. Mach., 20.

[214] J. D. Rutledge. Program schemata as automata, part i, 1970. 1970a; IBM Res. RC 3098. J. Comput and System Sci., 7 (1973), pp. 543–578.

[215] J. D. Rutledge. Parallel processes . . . schemata and transformation, 1970. 1970b; , IBM Res. Rep. RC 2912, Yorktown Heights, N.Y.

[216] A. Salwicki. Formalized algorithmic languages, 1970. 1970a; , Bull. Acad. Polon. Sci. Sér. Math. Astronom. Phys., 18, pp. 227–232.

[217] A. Salwicki. On the equivalence of fs-expressions and programs, 1970. 1970b; , Bull. Acad. Polon. Sci. Sér. Math. Astronom. Phys., 18, pp. 275–278.

[218] A. Salwicki. On the predicate calculi with iteration quantifiers, 1970. 1970c; , Bull. Acad. Polon. Sci. Sér. Math. Astronom. Phys., 18, pp. 279–286.

[219] J. G. Sanderson. The λ calculus, lattice theory and reflexive domains, 1973. Mathematical Institute Lecture Notes, Oxford, England.

[220] L. P. Sasso. Degrees of unsolvability of partial functions, 1971. Ph.D. dissertation, Univ. of Calif., Berkeley.

[221] L. P. Sasso. A minimal partial degree, 1973. Proc. Amer. Math. Soc., 38, pp. 388–392.

[222] L. P. Sasso. A survey of partial degrees, 1975. J. Symbolic Logic, 40, pp. 130–140.

[223] D. Scott. A type-theoretical alternative to iswim, cuch, owhy, 1969. Unpublished notes, Oxford, England.

[224] D. Scott. Outline of a mathematical theory of computation, 1970. Proceedings of the Fourth Annual Princeton Conference on Information Sciences and Systems, pp. 169–176. [Also: Tech. Monograph PRG-2, Oxford Univ. Computing Lab., Programming Research Group (1970).].

[225] D. Scott. Lattice theory, data types, and semantics, 1971. New York University Symposia in Areas of Current Interest in Computer Science (Randall Rustin ed.) (1971) to appear.

[226] D. Scott. The lattice of flow diagrams, 1971. Symposium on Semantics of Algorithmic Languages, E. Engeler, ed., Lecture Notes in Mathematics, vol. 188, Springer-Verlag, New York, pp. 311–366. [Also: Tech. Monograph PRG-3, Oxford Univ. Computing Lab., Programming Research Group (1970).].

[227] D. Scott and C. Strachey. Toward a mathematical semantics for computer languages, 1971. Proc. Symposium on Computers and Automata, Polytechnic Inst. of Brooklyn, vol. 21, pp. 19–46. [Also: Technical Monograph PRG-6, Oxford Univ. Computing Lab., Programming Research Group (1971).].

[228] D. Scott. Mathematical concepts in programming language semantics, 1972. 1972b; , AFIPS Conf. Proc., vol. 40, pp. 225–234.

[229] D. Scott. Data types as lattices, 1973. 1973a; , Unpublished lecture notes, Mathematical Centre, Amsterdam, 1973.

[230] D. Scott. Models for various type-free calculi, 1973. 1973b; , Proc. IVth Internat. Cong. for Logic, Methodology and the Philosophy of Science, Bucharest, P. Suppes et al., eds., North-Holland, Amsterdam, pp. 157–187.

[231] D. Scott. Lambda calculus and recursion theory, 1975. 1975a; , Proc. 3rd Scandinavian Logic Symposium, Stig Kanger, ed., North-Holland, Amsterdam, pp. 154–193.

[232] D. Scott. Combinators and classes, 1975. 1975b; , λ-Calculus and computer science theory, Proc. Rome Symp., March 1975; Lecture Notes in Computer Science, vol. 37, Springer-Verlag, Berlin, pp. 1–26.

[233] D. Scott. Some philosophical issues concerning theories of combinators, 1975. 1975c; , λ-Calculus and computer science theory, Proc. Rome Symp., March 1975; Lecture Notes in Computer Science, vol. 37, Springer-Verlag, Berlin, pp. 346–366.

[234] J. C. Shepherdson. Computation over abstract structures: Serial and parallel procedures and friedman's effective definitional schemes, 1975. Logic Colloquium 1973, H. E. Rose and J. C. Shepherdson, eds., North-Holland, Amsterdam, pp. 445–513.

[235] E. Spanier. Quasi-topologies, 1963. Duke Mathematical Journal, vol. 30 (1963) pp. 1-14.

[236] C. Strachey. Towards a formal semantics, 1966. Formal Language Description Languages for Computer Programming, T. B. Steel, ed., North-Holland, Amsterdam, pp. 198–220.

[237] C. Strachey. Fundamental concepts in programming languages, 1967. Unpublished lecture notes for the NATO Summer School, Copenhagen.

[238] C. Strachey. Varieties of programming languages, 1972. Proc. Internat. Computing Symp., Cini Foundation, Venice, pp. 222–233. [Also: Tech. Monograph PRG-10, Oxford Univ. Computing Lab., Programming Research Group (1972).].

[239] C. Strachey and C. Wadsworth. Continuations: A mathematical semantics for handling full jumps, 1974. Tech. Monograph PRG-11, Oxford Univ. Computing Lab., Programming Research Group.

[240] W. Strother. Fixed points, fixed sets, and m-retracts, 1955. Duke Mathematical Journal, vol. 22 (1955), pp. 551-556.

[241] A. Tang. Recursion theory and descriptive set theory in effectively given t_0 spaces, 1974. Ph.D. thesis, Princeton Univ., Princeton, N.J.

[242] A. Tang. Borel sets in $p\omega$, 1975. 1975a; , IRIA-Laboria, preprint.

[243] A. Tang. Notes on subsets on $p\omega$ with extra-finitary property, 1975. 1975b; , IRIA, preprint.

[244] A. Tang. A hierarchy of b_δ sets in $p\omega$, 1975. 1975c; , IRIA, preprint.

[245] A. Tang. Sets of the form $\{x \mid R(x) = T\}$ in $p\omega$, 1975. 1975c; , IRIA, preprint.

[246] A. Tang. $\leqq_e$ degrees in p, iria, preprint, 1975. 1975d.

[247] A. Tarski. On some fundamental concepts of mathematics, 1930. ; translated by J. H. Woodger in Logic, Semantics, Metamathematics, Cambridge, 1956, pp. 30–37.

[248] A. Tarski. A lattice-theoretical fixpoint theorem and its applications, 1955. Pacific J. Math., 5, pp. 285–309.

[249] R. D. Tennent. Mathematical semantics and design of programming languages, 1973. Ph.D. thesis, Univ. of Toronto. [Also: Tech. Rep. 59, Univ. of Toronto (1973).].

[250] R. D. Tennent. The mathematical semantics of programming languages, 1974. 1974a; , Dept. of Computing and Information Sci., Queen's Univ., Kingston, Ontario, Canada (preprint).

[251] R. D. Tennent. A contribution to the development of pascal-like languages, 1974. 1974b; , Tech. Rep. 74-25, Dept. of Computing and Information Sci., Queen's Univ., Kingston, Ontario, Canada.

[252] R. D. Tennent. Pasqual: A proposed generalization of pascal, 1975. Tech. Rep. 75-32, Dept. of Computing and Information Sci., Queen's Univ., Kingston, Ontario, Canada.

[253] J. Vuillemin. Proof techniques for recursive programs, 1973. 1973a; , IRIA—Laboria Rep.

[254] J. Vuillemin. Correct and optimal implementations of recursion in a simple programming language, 1973. 1973b; , IRIA—Laboria Rep. 24.

[255] C. P. Wadsworth. Semantics and pragmatics of the lambda-calculus, 1971. D. Phil. thesis, Oxford Univ., Oxford, England.

[256] C. P. Wadsworth. The relation between lambda-expressions and their denotation, 1975. 1975a; , Dept. of Systems and Information Sci., Syracuse Univ., Syracuse, N.Y. (preprint).

[257] C. P. Wadsworth. Approximate reduction and lambda-calculus models, 1975. 1975b; , Dept. of Systems and Information Sci., Syracuse Univ., Syracuse, N.Y.

[258] C. P. Wadsworth. Some unusual λ-calculus numeral systems, 1975. 1975c; , in preparation.

[259] C. P. Wadsworth. On the topological ordering in the d-model of the lambda-calculus. to appear; , in preparation.

[260] E. G. Wagner. Languages for defining sets in arbitrary algebras, 1971. 1971a; , Proc. of the 11th IEEE Conf. on Switching and Automata Theory, pp. 192–201.

[261] E. G. Wagner. An algebraic theory of recursive definitions and recursive languages, 1971. 1971b; , Proc. of the 3rd ACM Symp. on Theory of Computing.

[262] E. G. Wagner. Notes on categories, algebras and programming languages, 1974. Unpublished lecture notes, London.

[263] M. Wand. Mathematical foundations of formal language theory, 1973. MAC-TR-108, Project MAC, Mass. Inst. of Tech., Cambridge, Mass.

[264] M. Wand. An algebraic formulation of the chomsky hierarchy, 1974. 1974a; , Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 216–221.

[265] M. Wand. On the recursive specification of data types, 1974. 1974b; , Category Theory Applied to Computation and Control, E. Manes, ed., Univ. of Mass., pp. 222–225.

[266] M. Wand. Realizing data structures as lattices, 1974. 1974c; , Tech. Rep. 11, Computer Sci. Dept., Indiana Univ.

[267] M. Wand. Fixed-point constructions in order-enriched categories, 1975. Tech. Rep. 23, Computer Sci. Dept., Indiana Univ.

[268] P. Wegner and D. Lehmann. Algebraic and topological prerequisites to scott's theory of computation, 1972. Tech. Rep. 72-2, Dept. of Computer Sci., Hebrew Univ. of Jerusalem.

[269] R. W. Weyrauch and R. Milner. Program correctness in a mechanized logic, 1972. Proc. of the 1st USA-JAPAN Computer Conf., pp. 384–390.

[270] J. B. Wright. Characterization of recursively enumerable sets, 1972. J. Symbolic Logic, 37, pp. 507–511.